SMD-codes

DATABOOK

SMD-codes

Active SMD semiconductor components marking codes

- 301.000 SMD-codes for active semiconductor components:
- Diodes, Transistors, Thyristors, Integrated Circuits
- Case pin assignment
- Pinout
- Marking style
- Schematic diagram
- Additional SMD info
- Case drawings
- Manufacturers

2014 EDITION

TURUTA MarCMiRaJ

ELECTRONICS COMPONENTS

RadioHata.RU

Портал радиолюбителя

Радиотехнические журналы

Журнал Радио

Программы для радиолюбителя

Начинающему радиолюбителю

Телевидение и Радио

Источники питания

Для дома и быта

Прием-передача

Полезное видео

Автолюбителю

Аудиотехника

Arduino / Rasberry

Разное

Eugeniu Turuta Martin Christian Turuta

Active SMD components marking codes

databook

INTRODUCTION

1. 2-pin case SMD semicondutor components
2. SOD-80 (MELF) case SMD semicondutor components
3. 3-pin case SMD semicondutor components
4. SOT-223 case SMD semicondutor components
5. SOT-89 case SMD semicondutor components
6. 4-pin case SMD semicondutor components
7. 5-pin case SMD semicondutor components
8. SOT-89-5 case SMD semicondutor components
9. 6 and more pin case SMD semicondutor components
10. BGA, DFN and QFN case SMD semicondutor components
11. D-PAK and I-PAK case SMD semicondutor components
12. Case pin assignment
13. Pinout (table)
14. SMD-code marking attribute
15. SMD-code marking style
16. Sample schematic diagram
17. Adittional SMD info
18. Case drawings
19. Manufacturers logos and URL

Toronto, 2014 edition
Chisinau, 2014 edition

Introduction

At earlier eighties began a trend to replace a traditional through - hole technique with the surface mounted technology (SMT) using surface mounted devices (SMD). The SMT, although intended in principle for automatic manufacturing only expand more and more, even into a hobby world. This trend will continue, because many new components are available in SMD versions only. The SMT technique opens advantages and new applications through miniaturising of the components and increasing of reliability. The industry standard unfortunately allows that most of the SMD components does not have a clear description. Since a tiny size of the components, they are labelled with one, two or more character or graphic SMD code. Thus it is necessary to take into account that the colour and (or) placing of alphanumeric or graphic symbols are also important. Therefore a sure identification of the components is impossible without appropriate technical documentation. Moreover the polarity and pin - outs of different components could be not identified without data sheets.

Identifying the manufacturers type number of an SMD device from the package code can be a difficult task. Unfortunately, each device code is not necessarily unique.

It is possible for various manufacturers to place different devices in the same case with the same SMD-code. For example, with a **6H** SMD-code in a SOT-23 case might be either a npn-transistor **BC818** (CDIL) or a capacitance-diode **FMMV2104** (Zetex) or a n-channel jFET transistor **MMBF5486** (Motorola) or a pnp-digital transistor **MUN2131** (Motorola) or a pnp-digital transistor **UN2117** (Panasonic) or a CMOS-integrated circuit- voltage detector with reset output **R3131N36EA** (Ricoh). Even the same manufacturer may use the same code for different devices.

To identify a particular SMD device, is necessary to identify the manufacturer, package type and note the SMD code printed on the device.

The identification of the manufacturer is possible only if on the case are printed the manufacturer's logos, but it not always happens. Besides, sometimes, it is possible to determine the manufacturer with indirect tags. Many recent ON Semiconductor devices have a small superscript letter after the device code, such as **SA**^{c} (this smaller letter is merely a month of manufacture code). Infineon devices usually have a lower case **'s'** (ATs, LOs). NXP (Philips) devices usually have a lower case **'p'** (AHp, Z1p, pB0) or **'-'** (DQ-, -ZS) for the devices made in Hong Kong, **'t'** (tT9, Y7t) for the devices made in Malaysia, "W" (WT9, Y7W) for the devices made in China. In section 19 are submitted the logos of the SMD devices manufacturers.

The package type is another problem for the identification of SMD devices. The different manufacturers can designate identical cases concerning by the various standards (or concerning by the internal system). Besides, the various cases can have an identical kind (form) and differ only by sizes. This distinction of sizes so it is not enough, that can be is measured only by special measuring devices.

Compliance with the name and type of cases from different manufacturers is solved by applying in the column "Case" an equivalent type name for equivalent cases.

In addition to SMD-code, uper case may be put padding alpha-numeric information (usually by another font or size of characters, also may be by other arrangement). Relationship position of the SMD-code and padding information have defined as style and show in the column "Style"

In the following tables sections the SMD semiconductor components - irrelevant as to whether it is dealing with transistors, diodes, integrated circuits etc. are placed in separate tables according to numbers of terminals and (or) type of cases and are listed in alpha-numeric order by SMD-codes.

Column 1 ("SMD-Code")

Column 2 ("A")
Additional SMD-codes attribute such as subscipt bar, uperscipt bar, reverse symbol and other (section 14).

Column 2 ("Type")
The type designations correspond to those of the respective manufacturer documentations.

Column 3 ("Function")
Short definition of the semiconductor component.
Used abbreviations:

BM-IC	Battery Management integrated circuit
BR	Bridge Rectifier
C-diode	Capacitance diode (varactor, varicap)
CMOS-Log	CMOS logic integrated circuit
Comp-IC	Voltage comparator integrated circuit
DC/DC-IC	DC/DC voltage converter integrated circuit
ESDP-diode	ElectroStatic Discharge Protection diode
ESD-Prot	ElectroStatic Discharge Protection thyristor
-FET	Field Effect Transistor
HEMT	High electron mobility transistors
H-IC	Hall-effect sensor integrated circuit
IGBT	Insulated Gate Bipolar Transistor
IGBT+Di	Insulated Gate Bipolar Transistor with antiparallel diode
LDR-IC	LED driver integrated circuit
Lin-IC	Linear integrated circuit
LVR-IC	Linear voltage regulator integrated circuit
LVR/Vdet-IC	Linear voltage regulator/Voltage detector combined integrated circuit
MMIC	Monolithic Microwave Integrated Circuit
-MOSFET	Metal-Oxide-Semiconductor FET
-MESFET	MEtal-Semiconductor FET
n-	n-channel junction transistor
n/p-	n-channel and p-channel transistors area
Op-IC	Operational amplifier integrated circuit
p-	p-channel junction transistor
PHEMT	Pseudomorphic high electron mobility transistors
PIN-diode	PIN-diode
SA-Z-diode	Surge Absorption Zener diode
Si-diode	Silicon diode
Si-Varistor	Silicon voltage depending resistor
Si-npn	Silicon npn transistor
Si-n/p	Silicon npn and pnp transistors area
Si-npn-Darl	Silicon npn Darlington transistor
Si-npn-Digi	Silicon npn "digital" transistor
Si-npn-Digi+Di	Silicon npn "digital" transistor with inter-

	nal diode
Si-pnp	Silicon pnp transistor
Si-pnp-Darl	Silicon pnp Darlington transistor
Si-pnp-Digi	Silicon pnp "digital" transistor
Si-npn-Digi+Di	Silicon pnp "digital" transistor with internal diode
SiC-diode	Silicon Carbide diode
SiGe-npn	Silicon/Geramanium npn transistor
Si-Stab	Silicon stabistor
SVR-IC	Switching Voltage Regulator integrated circuit
Tdet-IC	Thermal detector integrated circuit
Thy-SCR	Thyristor-controlled rectifier
Thy-SPD	Thyristor-surge protector device
Triac	Triode for alternating current
TVS	Transient voltage supressor
Vdet-IC	Voltage Detector integrated circuit
Vref-IC	Voltage Reference integrated circuit
Z-diode	Zener diode

Column 4 ("Short description")
Short data or description of function of each type.
Used abbreviations:

Adj.	Adjust, adjustable
AF	Audio Frequency
AGC	Automatic Gain Control
ALC	Automatic Level Control
AM	Amplitude Modulation (AM range)
Amp	Amplifier
Ant	Antenna
Att	Attenuator
Aval	Avalanshe
Disc.	Internal CL discharge
BTL	Bridge Tied Loads
Buff	Buffer
CATV	Broad band cable amplifier
+CE	Active HIGH Chip Enable
-CE	Active LOW Chip Enable
Cell	Cellular
CL	Internal CL discharge resistor
Contr	Controlled
Conv	Converter
Cordl	Cordless
Det	Detector
DG	Dual Gate
Diff	Differential
Dr, Drv	Driver
EN	Enable
Ext.	External
FM	Frequency Modulation (FM range)
GaAs	Gallium arsenide
GP	General Purpose Applications
HF	High Frequency
Hi-sp	High-speed
HSST	High-Speed Soft-Start
HV	High Voltage
I2C	I2C interface control
I2S	I2S interface
ICP	Inrush Current Protection
Instrum.	Instrumental
Latch-Pr.	Latch-Protection
LDO	Low drop voltage
LED	Light-emitting diode
LLS	Logic Level Shifter
LN	Low Noise
LogL	Logic Level (Uth > 0,8...2V)
Lo-sat	Low collector-emitter saturation voltage
LSST	Low-Speed Soft-Start
Mix	Mixer
MR	Manual Reset
OCL	Output Current Limiter
ODO	Open Drain Output
OCO	Open Collector Output
OVIn	Over Voltage Rest Input (negative)
OVP	Over Voltage Protection
Osc	Oscillator
Out	Output
OV	Latched OverVoltage function
PA	Power Amplifier
PAD	Pico-Amper Diode
PCA	Pulse Current Amplitude modulation
PDR	Internal pull-down resistor
PFM	Pulse-frequency modulation
Pow	Power
PPO	Push-Pull Output
PSM	Pulse-skip modulation
PUR	Internal pull-up resistor
PWM	Pulse-width modulation
Rect.	Rectifier
Reg.	Regulated
Res.	Resistor
Reset-Pr.	Reset-Protection
RF	Radio Frequency applications
Rt	Reset delay time
SBD	Schottky Barrier Diode
SBR	Schottky Barrier Rectifier Diode
SPI	SPI interface
St-dwn	Step-down
St-up	Step-up
Supress.	Supressor
Sw.	Switching
TMBSR	Trench MOS Barrier Schottky Rectifier
T-MOS	Trench-FET MOSFET
Trd	Time Reset Delay
Tun	Tuner
U-Speed	Ultra-speed
UHF	RF applications (>250 MHz)
ULN	Ultra Low-Noise
UV	Latched UperVoltage function
UVLO	Under voltage lock output
Var	Variable
VCO	Voltage controlled oscillator
VDet	Volatge Detector
Vdi	Input volatge detection
Vdo	Output volatge detection
VHF	RF applications (100...250MHz)
VFM	Voltage-Frequency Modulation
Vid	Video output stages
V-MOS	Vertical Metal Oxide Semiconductor
VR	Voltage Regulator
WB	Wide Band
WD	Watch-Dog Timer

Column 5 ("Case") Manufacturers case designation.

Column 6 ("Pin") Related case pin asignments and pinout (section 12, 13).

Column 7 ("Sch") Sample schematic connection for some ICs. All drawings are placed in the section 16.

Column 8 ("St") "Style" (upercase placement of the SMD-code and additional infomation drawing). All styles are placed in the section 15.

Column 9 ("Mnf")
The names of the manufacturer are abbreviated to save space. The complete name, logos, and URL of each manufacurer is listed alphabetically on section 19.

TURUTA ELECTRONICS WORLD

SEMICONDUCTOR COMPONENTS DATABOOKS, SERVICE MANUALS, DATASHEETS, REPAIR TECHNOLOFIES INFO

Since 2008 TURUTA ELECTRONICS WORLD are the worldwide leading publisher of e-format databooks for semiconductors info like transistors, diodes, thryistors, integrated circuits. Any electronic engineer nowadays is able to work sensibly and rationally with our products as databooks and online database. Anybody missing vital information at the decisive moment is throwing away expensive work time. We will help saving your time, nerves, energy and money. Trust a company being more than 6 years on the market.

Online SMD-codes and leaded components marking database

A monthly updated online database that includes now marking codes for different SMD and leaded, passive and active electronic components like fuses, diodes, thyristors, transistors and integrated circuits.

• **Features:**

- Search by marking code;
- Search by marking code with case class (pin number) selection;
- Exhaustive info about found electronic component;
- Direct link to a electronic component datasheet download;
- Direct link to a manufacturer web page.

Service manual

Service manuals for fax, printer, copier, mobile and wireless phone, amplifiers, car stereos, cassette decks, Blu-ray/DVD/CD players/recorders, compact stereos, equalizers, receivers, cameras, reel recorders, tuners, and other audio equipment, camcorders, monitors, TVs (including LCD, plasma PDP, projection TVs), and TV/Blu-ray/DVD/CD/VCR combo units. We have more than 80.000 documents in our growing collection!

Service manual pages navigation and searches available for any TEW visitors.

Free service manual download available only for subscribed member of TEW.

Datasheet collection



More than 250.000 datasheets - audio application integrated circuits such as preamplifiers, volume and tone controller, audio processor, audio power amplifiers; power management integrated circuits, industrial application integrated circuits available on your collection.

Electronic format databooks

TURUTA ELECTRONICS WORLD are the worldwide leading publisher of e-format databooks for semiconductors info like transistors, diodes, thryistors, integrated circuits.

• SMD-codes datbook, 2014 Edition

A new 2014 edition SMD-codes databook in electronic format from a known author Eugeniu Turuta presents the SMD-codes for active semiconductor components. This book includes now 235.000 SMD-codes for different semiconductors like diodes, thyristors, transistors and ICs.

• STK and STR integrated circuits, 2014 Edition

Data book about the common and very popular STK (Sanyo) and STR (Sanken) hybrid integrated circuits. Over 2.000 circuits from STK0025 to STR-Z4579.

Connection diagram, application, short description, table of characteristics with all common parameters, replacements, case outline drawings available for all integrated circuits.

• Power audio amplifiers - integrated circuits, 2014 Edition

A new, 2014 edition data book in electronic format from a known author Eugeniu Turuta presents the standard and modified circuit diagram, short description, electrical characteristics, pinouts and conventional case drawings of the integrated circuits - power audio amplifiers.

This book includes about 7000 most popular integrated circuits - power (final) audio amplifiers and for today is the most complete databook in the world.

TEW visitor can download sample (demo) version of all databook.

Purchase of TEW databooks is very simple and can be made directly from web-page trough PayPal payment system. If you don't have access to the PayPal payment system, write to a eturuta@gmail.com.

A new editorial policy of TEW allow to propose already existing customers (any TEW old edition databook buyers and subscribed mebers) the special (discount) price for the news databooks.

SECTION 1
2-pin case SMD semiconductor components









0
1
2
3
4
5
6
7
8
9
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
.0	-	BZX584C5V6-V-G	Zener diode	5.2..6.0V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523	7d	1a	Vs
.1	-	BZX584C5V1-V-G	Zener diode	4.8..5.4V, Izt=5mA, Zzt=60Ω, 200mW	SOD-523	7d	1a	Vs
.1	bn	BZX584C16-V-G	Zener diode	15.3..17.1V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523	7d	1a	Vs
.1	bo	BZX584C6V2-V-G	Zener diode	5.8..6.6V, Izt=5mA, Zzt=10Ω, 200mW	SOD-523	7d	1a	Vs
.1	bp	BZX584C22-V-G	Zener diode	20.8..23.3V, Izt=5mA, Zzt=55Ω, 200mW	SOD-523	7d	1a	Vs
.2	-	BZX584C2V4-V-G	Zener diode	2.2..2.6V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	7d	1a	Vs
.2	bn	BZX584C18-V-G	Zener diode	16.8..19.1V, Izt=5mA, Zzt=45Ω, 200mW	SOD-523	7d	1a	Vs
.2	bo	BZX584C6V8-V-G	Zener diode	6.4..7.2V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	7d	1a	Vs
.3	-	BZX584C2V7-V-G	Zener diode	2.5..2.9V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	7d	1a	Vs
.3	bo	BZX584C7V5-V-G	Zener diode	7.0..7.9V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	7d	1a	Vs
.4	-	BZX584C3V0-V-G	Zener diode	2.8..3.2V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	7d	1a	Vs
.4	bn	BZX584C20-V-G	Zener diode	18.8..21.2V, Izt=5mA, Zzt=55Ω, 200mW	SOD-523	7d	1a	Vs
.4	bo	BZX584C15-V-G	Zener diode	14.3..15.8V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	7d	1a	Vs
.5	-	BZX584C3V3-V-G	Zener diode	3.1..3.5V, Izt=5mA, Zzt=95Ω, 200mW	SOD-523	7d	1a	Vs
.5	bn	BZX584C24-V-G	Zener diode	22.8..25.6V, Izt=5mA, Zzt=70Ω, 200mW	SOD-523	7d	1a	Vs
.5	bo	BZX584C13-V-G	Zener diode	12.4..14.1V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	7d	1a	Vs
.6	-	BZX584C3V6-V-G	Zener diode	3.4..3.8V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	7d	1a	Vs
.7	-	BZX584C3V9-V-G	Zener diode	3.7..4.1V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	7d	1a	Vs
.7	bn	BZX584C27-V-G	Zener diode	25.1..28.9V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523	7d	1a	Vs
.7	bo	BZX584C12-V-G	Zener diode	11.4..12.7V, Izt=5mA, Zzt=25Ω, 200mW	SOD-523	7d	1a	Vs
.8	-	BZX584C4V3-V-G	Zener diode	4.0..4.6V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	7d	1a	Vs
.9	-	BZX584C4V7-V-G	Zener diode	4.4..5.0V, Izt=5mA, Zzt=80Ω, 200mW	SOD-523	7d	1a	Vs
.9	bn	BZX584C33-V-G	Zener diode	31..35V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523	7d	1a	Vs
.C3	-	CZRW5223B-HF	Zener diode	2.57..2.84V, Zzt=30Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.C5	-	CZRW5225B-HF	Zener diode	2.85..3.15V, Zzt=30Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.E1	-	CZRW5231B-HF	Zener diode	4.85..5.36V, Zzt=17Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.E2	-	CZRW5232B-HF	Zener diode	5.32..5.88V, Zzt=11Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.E3	-	CZRW5233B-HF	Zener diode	5.70..6.30V, Zzt=7Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.E4	-	CZRW5234B-HF	Zener diode	5.89..6.51V, Zzt=7Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.E5	-	CZRW5235B-HF	Zener diode	6.46..7.14V, Zzt=5Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.F1	-	CZRW5236B-HF	Zener diode	7.13..7.88V, Zzt=6Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.F2	-	CZRW5237B-HF	Zener diode	7.79..8.61V, Zzt=8Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.F3	-	CZRW5238B-HF	Zener diode	8.27..9.14V, Zzt=8Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.F4	-	CZRW5239B-HF	Zener diode	8.65..9.56V, Zzt=10Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.F5	-	CZRW5240B-HF	Zener diode	9.50..10.50V, Zzt=17Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.G1	-	CZRW5226B-HF	Zener diode	3.14..3.47V, Zzt=28Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.G2	-	CZRW5227B-HF	Zener diode	3.42..3.78V, Zzt=24Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.G3	-	CZRW5228B-HF	Zener diode	3.71..4.10V, Zzt=23Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.G4	-	CZRW5229B-HF	Zener diode	4.09..4.52V, Zzt=22Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.G5	-	CZRW5230B-HF	Zener diode	4.47..4.94V, Zzt=19Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.H1	-	CZRW5241B-HF	Zener diode	10.45..11.55V, Zzt=22Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.H2	-	CZRW5242B-HF	Zener diode	11.40..12.60V, Zzt=30Ω, Izt=20mA, 350mW	SOD-123	5d	1a	Cmc
.H3	-	CZRW5243B-HF	Zener diode	12.35..13.65V, Zzt=13Ω, Izt=9.5mA, 350mW	SOD-123	5d	1a	Cmc
.H4	-	CZRW5244B-HF	Zener diode	13.30..14.70V, Zzt=15Ω, Izt=9.0mA, 350mW	SOD-123	5d	1a	Cmc
.H5	-	CZRW5245B-HF	Zener diode	14.25..15.75V, Zzt=16Ω, Izt=8.5mA, 350mW	SOD-123	5d	1a	Cmc
.J1	-	CZRW5246B-HF	Zener diode	15.20..16.80V, Zzt=17Ω, Izt=7.8mA, 350mW	SOD-123	5d	1a	Cmc
.J2	-	CZRW5247B-HF	Zener diode	16.15..17.85V, Zzt=19Ω, Izt=7.4mA, 350mW	SOD-123	5d	1a	Cmc
.J3	-	CZRW5248B-HF	Zener diode	17.10..18.90V, Zzt=21Ω, Izt=7.0mA, 350mW	SOD-123	5d	1a	Cmc
.J5	-	CZRW5250B-HF	Zener diode	19.0..21.0V, Zzt=25Ω, Izt=6.2mA, 350mW	SOD-123	5d	1a	Cmc
.K	-	BZX584C30-V-G	Zener diode	28..32V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523	7d	1a	Vs
.K1	-	CZRW5251B-HF	Zener diode	20.90..23.10V, Zzt=29Ω, Izt=5.6mA, 350mW	SOD-123	5d	1a	Cmc
.K2	-	CZRW5252B-HF	Zener diode	22.80..25.20V, Zzt=33Ω, Izt=5.2mA, 350mW	SOD-123	5d	1a	Cmc
.K4	-	CZRW5254B-HF	Zener diode	25.65..28.35V, Zzt=41Ω, Izt=5mA, 350mW	SOD-123	5d	1a	Cmc
.K5	-	CZRW5255B-HF	Zener diode	26.60..29.40V, Zzt=44Ω, Izt=4.5mA, 350mW	SOD-123	5d	1a	Cmc
.L	-	BZX584C47-V-G	Zener diode	44..50V, Izt=2mA, Zzt=170Ω, 200mW	SOD-523	7d	1a	Vs
.M	-	BZX584C51-V-G	Zener diode	48..54V, Izt=2mA, Zzt=180Ω, 200mW	SOD-523	7d	1a	Vs
.M1	-	CZRW5256B-HF	Zener diode	28.50..31.50V, Zzt=49Ω, Izt=4.2mA, 350mW	SOD-123	5d	1a	Cmc
.P	bn	BZX584C36-V-G	Zener diode	34..38V, Izt=2mA, Zzt=90Ω, 200mW	SOD-523	7d	1a	Vs
.P	bo	BZX584C11-V-G	Zener diode	10.4..11.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523	7d	1a	Vs
.R	bn	BZX584C39-V-G	Zener diode	37..41V, Izt=2mA, Zzt=130Ω, 200mW	SOD-523	7d	1a	Vs
.R	bo	BZX584C10-V-G	Zener diode	9.4..10.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523	7d	1a	Vs
.S	bo	BZX584C9V1-V-G	Zener diode	8.5..9.6V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	7d	1a	Vs
.T	bp	BZX584C8V2-V-G	Zener diode	7.7..8.7V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	7d	1a	Vs
.U	bp	BZX584C43-V-G	Zener diode	40..46V, Izt=2mA, Zzt=150Ω, 200mW	SOD-523	7d	1a	Vs
_Z	-	MM3Z51VB	Zener diode	49.98..52.02V, Zzt=169Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
+5	-	BZX584B3V9	Zener diode	3.82..3.98V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523FL	7d	1a	Tac
+5	-	MM5Z3V9B	Zener diode	3.82..3.98V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523FL	7d	1a	Tac
<5	-	BZX584B75V	Zener diode	73.50..76.50V, Izt=2mA, Zzt=255Ω, 200mW	SOD-523FL	7d	1a	Tac
<5	-	MM5Z75VB	Zener diode	73.50..76.50V, Izt=2mA, Zzt=255Ω, 200mW	SOD-523FL	7d	1a	Tac
<Z	-	BZT52B75S	Zener diode	73.50..76.50V, Izt=2mA, Zzt=255Ω, 200mW	SOD-323FL	7d	1a	Tsc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
<Z	-	MM3Z75VB	Zener diode	73.5..76.50V, Zzt=240Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
<Z	-	MM3Z75VBW	Zener diode	73.50..76.50V, Izt=2mA, Zzt=255Ω, 200mW	SOD-323FL	7d	1a	Tac
<Z	-	TCMM3Z75VB	Zener diode	75V±2%, Izt=5mA, Zzt=240Ω, 200mW	SOD-323FL	7d	1a	Tac
=5	-	BZX584B56V	Zener diode	54.88..57.12V, Izt=2mA, Zzt=200Ω, 200mW	SOD-523FL	7d	1a	Tac
=5	-	MM5Z56VB	Zener diode	54.88..57.12V, Izt=2mA, Zzt=200Ω, 200mW	SOD-523FL	7d	1a	Tac
=Z	-	BZT52B56S	Zener diode	54.88..57.12V, Izt=2mA, Zzt=200Ω, 200mW	SOD-323FL	7d	1a	Tsc
=Z	-	MM3Z56VB	Zener diode	54.88..57.12V, Zzt=188Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
=Z	-	MM3Z56VBW	Zener diode	54.88..57.12V, Izt=2mA, Zzt=200Ω, 200mW	SOD-323FL	7d	1a	Tac
=Z	-	TCMM3Z56VB	Zener diode	56V±2%, Izt=5mA, Zzt=188Ω, 200mW	SOD-323FL	7d	1a	Tac
>5	-	BZX584B68V	Zener diode	66.64..69.36V, Izt=2mA, Zzt=240Ω, 200mW	SOD-523FL	7d	1a	Tac
>5	-	MM5Z68VB	Zener diode	66.64..69.36V, Izt=2mA, Zzt=240Ω, 200mW	SOD-523FL	7d	1a	Tac
>Z	-	BZT52B68S	Zener diode	66.64..69.36V, Izt=2mA, Zzt=240Ω, 200mW	SOD-323FL	7d	1a	Tsc
>Z	-	MM3Z68VB	Zener diode	66.64..69.36V, Zzt=226Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
>Z	-	MM3Z68VBW	Zener diode	66.64..69.36V, Izt=2mA, Zzt=240Ω, 200mW	SOD-323FL	7d	1a	Tac
>Z	-	TCMM3Z68VB	Zener diode	68V±2%, Izt=5mA, Zzt=226Ω, 200mW	SOD-323FL	7d	1a	Tac
0.	-	HVC300A	C-diode	VHF-tuning, 32V, 2.6/39.5pF(25V..2V/1MHz)	UFP	6d	1b	Ren
0.	-	HVE300A	C-diode	VHF-tuning, 39.5/47.4pF(2V)	SOD-123	5d	1a	Ren
0.	-	HVU300A	C-diode	VHF-tuning, 32V, 2.6/39.5pF(25..2V, 1MHz)	SOD-323	5d	1a	Ren
0.	-	MMPZ5221SPT	Zener diode	2.352..2.448V, Izt=5mA, Zzt=100Ω, 225mW	SOD-323	5d	1a	Chm
00	-	BZX384C2V4	Zener diode	2.2..2.6V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
00	-	FDZ2.4T	Zener diode	2.2..2.6V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Fis
00	-	LM3Z2V4T1G	Zener diode	2.2..2.6V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
00	-	LM5Z2V4T1G	Zener diode	2.2..2.6V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
00	-	MM3Z2V4	Zener diode	2.2..2.6V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Sec
00	-	MM5Z2V4	Zener diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 100mW	SOD-523	6d	1u	Wtr
00	-	MMPZ5221BPT	Zener diode	2.280..2.520V, Izt=5mA, Zzt=100Ω, 225mW	SOD-323	5d	1a	Chm
00	-	ZD02V4	Zener diode	2.2..2.6V, 5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Cys
01	-	BZX384C2V7	Zener diode	2.5..2.9V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
01	-	ESDA3L18	TVS	Vrwm=18V, Vbr=18.0..20.0V, Ipp=8.0A, 350w(20µs)	SOD-323FL	7d	1a	Frm
01	-	FDZ2.7T	Zener diode	2.5..2.9V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Fis
01	-	LM3Z2V7T1G	Zener diode	2.5..2.9V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
01	-	LM5Z2V7T1G	Zener diode	2.5..2.9V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
01	-	MM3Z2V7	Zener diode	2.5..2.9V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Sec
01	-	MM5Z2V7	Zener diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	6d	1a	Wtr
01	-	MMPZ5223BPT	Zener diode	2.565..2.835V, Izt=5mA, Zzt=100Ω, 225mW	SOD-323	5d	1a	Chm
01	-	ZD02V7	Zener diode	2.5..2.9V, 5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Cys
01C	-	ESDA3L18C	TVS	Vrwm=18V, Vbr=18.0..20.0V, Ipp=8.0A, 350w(20µs), Bidir.	SOD-323FL	7ba	1j	Frm
01C100PH	-	BZG01-C100	Zener diode	100V±5%, Izt=2.7mA, 1.5W	DO-214AC	1d	1a	Phi
01C10PH	-	BZG01-C10	Zener diode	10V±5%, Izt=25mA, 1.5W	DO-214AC	1d	1a	Phi
01C110PH	-	BZG01-C110	Zener diode	110V±5%, Izt=2.7mA, 1.5W	DO-214AC	1d	1a	Phi
01C11PH	-	BZG01-C11	Zener diode	11V±5%, Izt=20mA, 1.5W	DO-214AC	1d	1a	Phi
01C120PH	-	BZG01-C120	Zener diode	120V±5%, Izt=2mA, 1.5W	DO-214AC	1d	1a	Phi
01C12PH	-	BZG01-C12	Zener diode	12V±5%, Izt=20mA, 1.5W	DO-214AC	1d	1a	Phi
01C130PH	-	BZG01-C130	Zener diode	130V±5%, Izt=2mA, 1.5W	DO-214AC	1d	1a	Phi
01C13PH	-	BZG01-C13	Zener diode	13V±5%, Izt=20mA, 1.5W	DO-214AC	1d	1a	Phi
01C150PH	-	BZG01-C150	Zener diode	150V±5%, Izt=2mA, 1.5W	DO-214AC	1d	1a	Phi
01C15PH	-	BZG01-C15	Zener diode	15V±5%, Izt=15mA, 1.5W	DO-214AC	1d	1a	Phi
01C160PH	-	BZG01-C160	Zener diode	160V±5%, Izt=1.5mA, 1.5W	DO-214AC	1d	1a	Phi
01C16PH	-	BZG01-C16	Zener diode	16V±5%, Izt=15mA, 1.5W	DO-214AC	1d	1a	Phi
01C180PH	-	BZG01-C180	Zener diode	180V±5%, Izt=1.5mA, 1.5W	DO-214AC	1d	1a	Phi
01C18PH	-	BZG01-C18	Zener diode	18V±5%, Izt=15mA, 1.5W	DO-214AC	1d	1a	Phi
01C200PH	-	BZG01-C200	Zener diode	200V±5%, Izt=1.5mA, 1.5W	DO-214AC	1d	1a	Phi
01C20PH	-	BZG01-C20	Zener diode	20V±5%, Izt=10mA, 1.5W	DO-214AC	1d	1a	Phi
01C220PH	-	BZG01-C220	Zener diode	220V±5%, Izt=1mA, 1.5W	DO-214AC	1d	1a	Phi
01C22PH	-	BZG01-C22	Zener diode	22V±5%, Izt=10mA, 1.5W	DO-214AC	1d	1a	Phi
01C240PH	-	BZG01-C240	Zener diode	270V±5%, Izt=1mA, 1.5W	DO-214AC	1d	1a	Phi
01C24PH	-	BZG01-C24	Zener diode	24V±5%, Izt=10mA, 1.5W	DO-214AC	1d	1a	Phi
01C270PH	-	BZG01-C270	Zener diode	270V±5%, Izt=1mA, 1.5W	DO-214AC	1d	1a	Phi
01C27PH	-	BZG01-C27	Zener diode	27V±5%, Izt=8mA, 1.5W	DO-214AC	1d	1a	Phi
01C30PH	-	BZG01-C30	Zener diode	30V±5%, Izt=8mA, 1.5W	DO-214AC	1d	1a	Phi
01C33PH	-	BZG01-C33	Zener diode	33V±5%, Izt=8mA, 1.5W	DO-214AC	1d	1a	Phi
01C36PH	-	BZG01-C36	Zener diode	36V±5%, Izt=8mA, 1.5W	DO-214AC	1d	1a	Phi
01C39PH	-	BZG01-C39	Zener diode	39V±5%, Izt=6mA, 1.5W	DO-214AC	1d	1a	Phi
01C43PH	-	BZG01-C43	Zener diode	43V±5%, Izt=6mA, 1.5W	DO-214AC	1d	1a	Phi
01C47PH	-	BZG01-C47	Zener diode	47V±5%, Izt=4mA, 1.5W	DO-214AC	1d	1a	Phi
01C51PH	-	BZG01-C51	Zener diode	51V±5%, Izt=4mA, 1.5W	DO-214AC	1d	1a	Phi
01C56PH	-	BZG01-C56	Zener diode	56V±5%, Izt=4mA, 1.5W	DO-214AC	1d	1a	Phi
01C62PH	-	BZG01-C62	Zener diode	62V±5%, Izt=4mA, 1.5W	DO-214AC	1d	1a	Phi
01C68PH	-	BZG01-C68	Zener diode	68V±5%, Izt=4mA, 1.5W	DO-214AC	1d	1a	Phi
01C75PH	-	BZG01-C75	Zener diode	75V±5%, Izt=4mA, 1.5W	DO-214AC	1d	1a	Phi

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
01C82PH	-	BZG01-C82	Zener diode	82V±5%, Izt=2.7mA, 1.5W	DO-214AC	1d	1a	Phi
01C91PH	-	BZG01-C91	Zener diode	91V±5%, Izt=2.7mA, 1.5W	DO-214AC	1d	1a	Phi
02	-	BZX384C3V0	Zener diode	2.8..3.2V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
02	-	ESDA3L12	TVS	Vrwm=12V, Vbr=13.97..15.44V, Ipp=11.0A, 350w(20µs)	SOD-323FL	7d	1a	Frm
02	-	FDZ2.0VT	Zener diode	2.020..2.200V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Fis
02	-	FDZ3.0T	Zener diode	2.8..3.2V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Fis
02	-	GDZ2V0B-V	Zener diode	2.02..2.2V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	2m	Vs
02	-	LBZT52B2V0T1G	Zener diode	2.02..2.2V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
02	-	LM3Z3V0T1G	Zener diode	2.8..3.2V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
02	-	LM5Z3V0T1G	Zener diode	2.8..3.2V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
02	-	LUDZS2.0BT1G	Zener diode	2.02..2.2V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
02	-	MM3Z3V0	Zener diode	2.8..3.2V, Izt=5mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Sec
02	-	MM5Z3V0	Zener diode	3.0V±5%, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	6d	1u	Wtr
02	-	MMPZ5225BPT	Zener diode	2.850..3.150V, Izt=5mA, Zzt=95Ω, 225mW	SOD-323	5d	1a	Chm
02	-	UDZS2.0B	Zener diode	2.02..2.20V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Wtr
02	-	ZD03V0	Zener diode	2.8..3.2V, 5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Cys
02C	-	ESDA3L12C	TVS	Vrwm=12V, Vbr=13.97..15.44V, Ipp=11.0A, 350w(20µs), Bidir.	SOD-323FL	7ba	1j	Frm
03	-	ESDA3L03	TVS	Vrwm=3.3V, Vbr=4.75..5.25V, Ipp=20.0A, 350w(20µs)	SOD-323FL	7d	1a	Frm
0391PH	-	BZG03-C91	Zener diode	91V±5%, Izt=5mA, Zzt=60Ω, 1.25W	DO-214AC	1d	1a	Phi
03C	-	ESDA3L03C	TVS	Vrwm=3.3V, Vbr=4.75..5.25V, Ipp=20.0A, 350w(20µs), Bidir.	SOD-323FL	7ba	1j	Frm
03C100PH	-	BZG03-C100	Zener diode	100V±5%, Izt=5mA, Zzt=60Ω, 1.25W	DO-214AC	1d	1a	Phi
03C10PH	-	BZG03-C10	Zener diode	10V±5%, Izt=50mA, Zzt=2Ω, 1.25W	DO-214AC	1d	1a	Phi
03C110PH	-	BZG03-C110	Zener diode	110V±5%, Izt=5mA, Zzt=80Ω, 1.25W	DO-214AC	1d	1a	Phi
03C11PH	-	BZG03-C11	Zener diode	11V±5%, Izt=50mA, Zzt=4Ω, 1.25W	DO-214AC	1d	1a	Phi
03C120PH	-	BZG03-C120	Zener diode	120V±5%, Izt=5mA, Zzt=80Ω, 1.25W	DO-214AC	1d	1a	Phi
03C12PH	-	BZG03-C12	Zener diode	12V±5%, Izt=50mA, Zzt=4Ω, 1.25W	DO-214AC	1d	1a	Phi
03C130PH	-	BZG03-C130	Zener diode	130V±5%, Izt=5mA, Zzt=110Ω, 1.25W	DO-214AC	1d	1a	Phi
03C13PH	-	BZG03-C13	Zener diode	13V±5%, Izt=50mA, Zzt=5Ω, 1.25W	DO-214AC	1d	1a	Phi
03C150PH	-	BZG03-C150	Zener diode	150V±5%, Izt=5mA, Zzt=130Ω, 1.25W	DO-214AC	1d	1a	Phi
03C15PH	-	BZG03-C15	Zener diode	15V±5%, Izt=50mA, Zzt=5Ω, 1.25W	DO-214AC	1d	1a	Phi
03C160PH	-	BZG03-C160	Zener diode	160V±5%, Izt=5mA, Zzt=150Ω, 1.25W	DO-214AC	1d	1a	Phi
03C16PH	-	BZG03-C16	Zener diode	16V±5%, Izt=25mA, Zzt=6Ω, 1.25W	DO-214AC	1d	1a	Phi
03C180PH	-	BZG03-C180	Zener diode	180V±5%, Izt=5mA, Zzt=180Ω, 1.25W	DO-214AC	1d	1a	Phi
03C18PH	-	BZG03-C18	Zener diode	18V±5%, Izt=25mA, Zzt=6Ω, 1.25W	DO-214AC	1d	1a	Phi
03C200PH	-	BZG03-C200	Zener diode	200V±5%, Izt=5mA, Zzt=200Ω, 1.25W	DO-214AC	1d	1a	Phi
03C20PH	-	BZG03-C20	Zener diode	20V±5%, Izt=25mA, Zzt=6Ω, 1.25W	DO-214AC	1d	1a	Phi
03C220PH	-	BZG03-C220	Zener diode	220V±5%, Izt=2mA, Zzt=350Ω, 1.25W	DO-214AC	1d	1a	Phi
03C22PH	-	BZG03-C22	Zener diode	22V±5%, Izt=25mA, Zzt=6Ω, 1.25W	DO-214AC	1d	1a	Phi
03C240PH	-	BZG03-C240	Zener diode	270V±5%, Izt=2mA, Zzt=400Ω, 1.25W	DO-214AC	1d	1a	Phi
03C24PH	-	BZG03-C24	Zener diode	24V±5%, Izt=25mA, Zzt=7Ω, 1.25W	DO-214AC	1d	1a	Phi
03C270PH	-	BZG03-C270	Zener diode	270V±5%, Izt=2mA, Zzt=450Ω, 1.25W	DO-214AC	1d	1a	Phi
03C27PH	-	BZG03-C27	Zener diode	27V±5%, Izt=25mA, Zzt=7Ω, 1.25W	DO-214AC	1d	1a	Phi
03C30PH	-	BZG03-C30	Zener diode	30V±5%, Izt=25mA, Zzt=8Ω, 1.25W	DO-214AC	1d	1a	Phi
03C33PH	-	BZG03-C33	Zener diode	33V±5%, Izt=25mA, Zzt=8Ω, 1.25W	DO-214AC	1d	1a	Phi
03C36PH	-	BZG03-C36	Zener diode	36V±5%, Izt=10mA, Zzt=21Ω, 1.25W	DO-214AC	1d	1a	Phi
03C39PH	-	BZG03-C39	Zener diode	39V±5%, Izt=10mA, Zzt=21Ω, 1.25W	DO-214AC	1d	1a	Phi
03C43PH	-	BZG03-C43	Zener diode	43V±5%, Izt=10mA, Zzt=24Ω, 1.25W	DO-214AC	1d	1a	Phi
03C47PH	-	BZG03-C47	Zener diode	47V±5%, Izt=10mA, Zzt=24Ω, 1.25W	DO-214AC	1d	1a	Phi
03C51PH	-	BZG03-C51	Zener diode	51V±5%, Izt=10mA, Zzt=25Ω, 1.25W	DO-214AC	1d	1a	Phi
03C56PH	-	BZG03-C56	Zener diode	56V±5%, Izt=10mA, Zzt=25Ω, 1.25W	DO-214AC	1d	1a	Phi
03C62PH	-	BZG03-C62	Zener diode	62V±5%, Izt=10mA, Zzt=25Ω, 1.25W	DO-214AC	1d	1a	Phi
03C68PH	-	BZG03-C68	Zener diode	68V±5%, Izt=10mA, Zzt=25Ω, 1.25W	DO-214AC	1d	1a	Phi
03C75PH	-	BZG03-C75	Zener diode	75V±5%, Izt=10mA, Zzt=30Ω, 1.25W	DO-214AC	1d	1a	Phi
03C82PH	-	BZG03-C82	Zener diode	82V±5%, Izt=10mA, Zzt=30Ω, 1.25W	DO-214AC	1d	1a	Phi
03W	-	SD03	TVS	Vrwm=3.0V, Vbr=3.2..6.3V, Ipp=25A, 500W(1ms)	SOD-323	5d	1a	Ldt
04	-	ESDA3L24	TVS	Vrwm=24V, Vbr=27.27..30.14V, Ipp=6.0A, 350w(20µs)	SOD-323FL	7d	1a	Frm
0410	-	BZG04-10	TVS	Vrwm=10V, 17.7A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04100	-	BZG04-100	TVS	Vrwm=100V, 1.8A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04100PH	-	BZG04-100	TVS	Vrwm=100V, 1.8A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0410PH	-	BZG04-10	TVS	Vrwm=10V, 17.7A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0411	-	BZG04-11	TVS	Vrwm=11V, 15.9A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04110	-	BZG04-110	TVS	Vrwm=110V, 1.6A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04110PH	-	BZG04-110	TVS	Vrwm=110V, 1.6A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0411PH	-	BZG04-11	TVS	Vrwm=11V, 15.9A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0412	-	BZG04-12	TVS	Vrwm=12V, 14.4A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04120	-	BZG04-120	TVS	Vrwm=120V, 1.5A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04120PH	-	BZG04-120	TVS	Vrwm=120V, 1.5A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0412PH	-	BZG04-12	TVS	Vrwm=12V, 14.4A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0413	-	BZG04-13	TVS	Vrwm=13V, 13.1A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04130	-	BZG04-130	TVS	Vrwm=130V, 1.3A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
04130PH	-	BZG04-130	TVS	Vrwm=130V, 1.3A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0413PH	-	BZG04-13	TVS	Vrwm=13V, 13.1A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0415	-	BZG04-15	TVS	Vrwm=15V, 11.7A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04150	-	BZG04-150	TVS	Vrwm=150V, 1.2A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04150PH	-	BZG04-150	TVS	Vrwm=150V, 1.2A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0415PH	-	BZG04-15	TVS	Vrwm=15V, 11.7A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0416	-	BZG04-16	TVS	Vrwm=13V, 10.6A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04160	-	BZG04-160	TVS	Vrwm=160V, 1.1A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04160PH	-	BZG04-160	TVS	Vrwm=160V, 1.1A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0416PH	-	BZG04-16	TVS	Vrwm=13V, 10.6A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0418	-	BZG04-18	TVS	Vrwm=18V, 9.7A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04180	-	BZG04-180	TVS	Vrwm=180V, 1A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04180PH	-	BZG04-180	TVS	Vrwm=180V, 1A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0418PH	-	BZG04-18	TVS	Vrwm=18V, 9.7A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0420	-	BZG04-20	TVS	Vrwm=20V, 8.9A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04200	-	BZG04-200	TVS	Vrwm=200V, 0.9A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04200PH	-	BZG04-200	TVS	Vrwm=200V, 0.9A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0420PH	-	BZG04-20	TVS	Vrwm=20V, 8.9A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0422	-	BZG04-22	TVS	Vrwm=22V, 7.9A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04220	-	BZG04-220	TVS	Vrwm=220V, 800mA, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
04220PH	-	BZG04-220	TVS	Vrwm=220V, 800mA, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0422PH	-	BZG04-22	TVS	Vrwm=22V, 7.9A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0424	-	BZG04-24	TVS	Vrwm=24V, 7.1A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
0424PH	-	BZG04-24	TVS	Vrwm=24V, 7.1A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0427	-	BZG04-27	TVS	Vrwm=27V, 6.5A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
0427PH	-	BZG04-27	TVS	Vrwm=27V, 6.5A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0430	-	BZG04-30	TVS	Vrwm=30V, 6A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
0430PH	-	BZG04-30	TVS	Vrwm=30V, 6A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0433	-	BZG04-33	TVS	Vrwm=33V, 5.5A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
0433PH	-	BZG04-33	TVS	Vrwm=33V, 5.5A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0436	-	BZG04-36	TVS	Vrwm=36V, 4.9A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
0436PH	-	BZG04-36	TVS	Vrwm=36V, 4.9A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0439	-	BZG04-39	TVS	Vrwm=39V, 4.6A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
0439PH	-	BZG04-39	TVS	Vrwm=39V, 4.6A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0443	-	BZG04-43	TVS	Vrwm=43V, 4.2A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
0443PH	-	BZG04-43	TVS	Vrwm=43V, 4.2A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0447	-	BZG04-47	TVS	Vrwm=47V, 3.8A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
0447PH	-	BZG04-47	TVS	Vrwm=47V, 3.8A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0451	-	BZG04-51	TVS	Vrwm=51V, 3.5A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
0451PH	-	BZG04-51	TVS	Vrwm=51V, 3.5A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0456	-	BZG04-56	TVS	Vrwm=56V, 3.2A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
0456PH	-	BZG04-56	TVS	Vrwm=56V, 3.2A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0462	-	BZG04-62	TVS	Vrwm=62V, 2.9A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
0462PH	-	BZG04-62	TVS	Vrwm=62V, 2.9A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0468	-	BZG04-68	TVS	Vrwm=68V, 2.6A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
0468PH	-	BZG04-68	TVS	Vrwm=68V, 2.6A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0475	-	BZG04-75	TVS	Vrwm=75V, 2.4A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
0475PH	-	BZG04-75	TVS	Vrwm=75V, 2.4A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0482	-	BZG04-82	TVS	Vrwm=82V, 2.2A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
0482PH	-	BZG04-82	TVS	Vrwm=82V, 2.2A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
048V2	-	BZG04-8V2	TVS	Vrwm=8.2V, 20.3A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
048V2PH	-	BZG04-8V2	TVS	Vrwm=8.2V, 20.3A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
0491	-	BZG04-91	TVS	Vrwm=91V, 2A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
0491PH	-	BZG04-91	TVS	Vrwm=91V, 2A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
049V1	-	BZG04-9V1	TVS	Vrwm=9.1V, 19.1A, 300W(10/1000µs)	DO-214AC	1d	1a	Sil
049V1PH	-	BZG04-9V1	TVS	Vrwm=9.1V, 19.1A, 300W(10/1000µs)	DO-214AC	1d	1a	Phi
04C	-	ESDA3L24C	TVS	Vrwm=24V, Vbr=27.27..30.14V, Ipp=6.0A, 350w(20µs), Bidir.	SOD-323FL	7ba	1j	Frm
05	-	BZX384C3V3	Zener diode	3.1..3.5V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
05	-	BZX584B2V4	Zener diode	2.35..2.45V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523FL	7d	1a	Tac
05	-	EDZ10B	Zener diode	9.77..10.21V, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Rhm
05	-	EDZV10B	Zener diode	9.77..10.21V, Izt=5.0mA, Zzt=30Ω, 150mW	SOD-523	6d	2v	Rhm
05	-	ESDA3L05	TVS	Vrwm=5.0V, Vbr=7.03..7.77V, Ipp=17.0A, 350w(20µs)	SOD-323FL	7d	1a	Frm
05	-	FDZ10EV	Zener diode	9.770..10.210V, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Fis
05	-	FDZ10VT	Zener diode	9.770..10.210V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Fis
05	-	FDZ3.3T	Zener diode	3.1..3.5V, Izt=5mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Fis
05	-	GDZ2V0B-V-G	Zener diode	2.02..2.2V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	2m	Vs
05	-	LBZT52B10T1G	Zener diode	9.77..10.21V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
05	-	LEDZ10BT1G	Zener diode	9.77..10.21V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
05	-	LM3Z3V3T1G	Zener diode	3.1..3.5V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
05	-	LM5Z3V3T1G	Zener diode	3.1..3.5V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
05	-	LUDZS10BT1G	Zener diode	9.77..10.21V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
05	-	MM3Z3V3	Zener diode	3.1..3.5V, Izt=5mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Sec
05	-	MM5Z2V4B	Zener diode	2.35..2.45V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523FL	7d	1a	Tac
05	-	MM5Z3V3	Zener diode	3.3V±5%, Izt=5mA, Zzt=95Ω, 200mW	SOD-523	6d	1u	Wtr
05	-	MMPZ5226BPT	Zener diode	3.135..3.465V, Izt=5mA, Zzt=95Ω, 225mW	SOD-323	5d	1a	Chm
05	-	TDZ10B	Zener diode	10V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
05	-	UDZS10B	Zener diode	9.77..10.21V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Wtr
05	-	UDZS10B	Zener diode	10V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
05	-	UDZV10B	Zener diode	9.77..10.21V, Izt=5.0mA, Zzt=30Ω, 200mW	SOD-323	5d	2v	Rhm
05	-	VDZS10B	Zener diode	10V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
05	-	ZD03V3	Zener diode	3.1..3.5V, 5mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Cys
058A	-	TSP058SA	Thy-SPD	V Of-St=58V, 50A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
058B	-	TSP058SB	Thy-SPD	V Of-St=58V, 80A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
058C	-	TSP058SC	Thy-SPD	V Of-St=58V, 100A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
05A	-	UMA5.0A	TVS	Vrwm=5.0V, Vbr=6.40..9.2V, 54.3A, 500W(1ms)	UltraMite	14d	1v	Msc
05C	-	ESDA3L05C	TVS	Vrwm=5.0V, Vbr=7.03..7.77V, Ipp=17.0A, 350w(20µs), Bidir.	SOD-323FL	7ba	1j	Frm
05CA	-	UMA5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..9.2V, 54.3A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
05W	-	SD05	TVS	Vrwm=5V, Vbr=6.2..7.3V, Ipp=24A, 500W(1ms)	SOD-323	5d	1a	Ldt
06	-	BZX384C3V6	Zener diode	3.4..3.8V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
06	-	ESDA3L15	TVS	Vrwm=15V, Vbr=17.39..19.22V, Ipp=10.0A, 350w(20µs)	SOD-323FL	7d	1a	Frm
06	-	FDZ3.6T	Zener diode	3.4..3.8V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Fis
06	-	LM3Z3V6T1G	Zener diode	3.4..3.8V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
06	-	LM5Z3V6T1G	Zener diode	3.4..3.8V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
06	-	MM3Z3V6	Zener diode	3.4..3.8V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Sec
06	-	MM5Z3V6	Zener diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1u	Wtr
06	-	MMPZ5227BPT	Zener diode	3.420..3.780V, Izt=5mA, Zzt=90Ω, 225mW	SOD-323	5d	1a	Chm
06	-	ZD03V6	Zener diode	3.4..3.8V, 5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Cys
061	-	HZU6A1L	Zener diode	5.2..5.5V, Izt=0.5mA, Zzt=150Ω, 150mW	URP	5d	1a	Ren
062	-	HZU6A2L	Zener diode	5.3..5.6V, Izt=0.5mA, Zzt=150Ω, 150mW	URP	5d	1a	Ren
063	-	HZU6A3L	Zener diode	5.4..5.7V, Izt=0.5mA, Zzt=150Ω, 150mW	URP	5d	1a	Ren
064	-	HZU6B1L	Zener diode	5.5..5.8V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
065	-	HZU6B2L	Zener diode	5.6..5.9V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
065A	-	TSP065SA	Thy-SPD	V Of-St=65V, 50A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
065A	-	UMA6.5A	TVS	Vrwm=6.5V, Vbr=7.22..11.2V, 44.7A, 500W(1ms)	UltraMite	14d	1v	Msc
065B	-	TSP065SB	Thy-SPD	V Of-St=65V, 80A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
065C	-	TSP065SC	Thy-SPD	V Of-St=65V, 100A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
065CA	-	UMA6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..11.2V, 44.7A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
066	-	HZU6B3L	Zener diode	5.7..6.0V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
067	-	HZU6C1L	Zener diode	5.8..6.1V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
068	-	HZU6C2L	Zener diode	6.0..6.3V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
069	-	HZU6C3L	Zener diode	6.1..6.4V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
06A	-	P0640SAA	Thy-SPD	Vdrm=58V, Vs=77V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Vs
06A	-	UMA6.0A	TVS	Vrwm=6.0V, Vbr=6.67..10.3V, 48.5A, 500W(1ms)	UltraMite	14d	1v	Msc
06C	-	ESDA3L15C	TVS	Vrwm=15V, Vbr=17.39..19.22V, Ipp=10.0A, 350w(20µs), Bidir.	SOD-323FL	7ba	1j	Frm
06CA	-	UMA6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..10.3V, 48.5A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
07	-	BZX384C3V9	Zener diode	3.7..4.1V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
07	-	FDZ3.9T	Zener diode	3.7..4.1V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Fis
07	-	KL3L07	Thy-SPD	V Of-St=65V, Ifsm=30A(1ms), Ih=100mA, Bidir.	1F	1ba	1l	Shi
07	-	LM3Z3V9T1G	Zener diode	3.7..4.1V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
07	-	LM5Z3V9T1G	Zener diode	3.7..4.1V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
07	-	MM3Z3V9	Zener diode	3.7..4.1V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Sec
07	-	MM5Z3V9	Zener diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1u	Wtr
07	-	MMPZ5228BPT	Zener diode	3.705..4.095V, Izt=5mA, Zzt=90Ω, 225mW	SOD-323	5d	1a	Chm
07	-	ZD03V9	Zener diode	3.7..4.1V, 5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Cys
071	-	HZU7A1L	Zener diode	6.3..6.6V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
072	-	HZU7A2L	Zener diode	6.4..6.7V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
073	-	HZU7A3L	Zener diode	6.6..6.9V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
074	-	HZU7B1L	Zener diode	6.7..7.0V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
075	-	HZU7B2L	Zener diode	6.9..7.2V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
075A	-	TSP075SA	Thy-SPD	V Of-St=75V, 50A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
075A	-	UMA7.5A	TVS	Vrwm=7.5V, Vbr=8.33..12.9V, 38.8A, 500W(1ms)	UltraMite	14d	1v	Msc
075B	-	TSP075SB	Thy-SPD	V Of-St=75V, 80A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
075C	-	TSP075SC	Thy-SPD	V Of-St=75V, 100A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
075CA	-	UMA7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..12.9V, 38.8A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
076	-	HZU7B3L	Zener diode	7.0..7.3V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
077	-	HZU7C1L	Zener diode	7.2..7.6 V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
078	-	HZU7C2L	Zener diode	7.3..7.7V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
079	-	HZU7C3L	Zener diode	7.5..7.9V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
07A	-	P0720SAA	Thy-SPD	Vdrm=65V, Vs=88V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Vs
07A	-	UMA7.0A	TVS	Vrwm=7.0V, Vbr=7.78..12.0V, 41.7A, 500W(1ms)	UltraMite	14d	1v	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
07CA	-	UMA7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..12.0V, 41.7A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
08	-	BZX384C4V3	Zener diode	4.0..4.6V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
08	-	ESDA3L08	TVS	Vrwm=8.0V, Vbr=8.93..9.87V, Ipp=17.0A, 350w(20µs)	SOD-323FL	7d	1a	Frm
08	-	FDZ4.3T	Zener diode	4.0..4.6V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Fis
08	-	LM3Z4V3T1G	Zener diode	4..4.6V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
08	-	LM5Z4V3T1G	Zener diode	4 4..6 5V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
08	-	MM3Z4V3	Zener diode	4.0..4.6V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Sec
08	-	MM5Z4V3	Zener diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1u	Wtr
08	-	MMPZ5229BPT	Zener diode	4.085..4.515V, Izt=5mA, Zzt=88Ω, 225mW	SOD-323	5d	1a	Chm
08	-	ZD04V3	Zener diode	4.0..4.6V, 5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Cys
085A	-	UMA8.5A	TVS	Vrwm=8.5V, Vbr=9.44..14.4V, 34.7A, 500W(1ms)	UltraMite	14d	1v	Msc
085CA	-	UMA8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..14.4V, 34.7A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
08A	-	UMA8.0A	TVS	Vrwm=8.0V, Vbr=8.89..13.6V, 36.7A, 500W(1ms)	UltraMite	14d	1v	Msc
08C	-	ESDA3L08C	TVS	Vrwm=8.0V, Vbr=8.93..9.87V, Ipp=17.0A, 350w(20µs), Bidir.	SOD-323FL	7ba	1j	Frm
08CA	-	UMA8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..13.6V, 36.7A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
09	-	BZX384C4V7	Zener diode	4.4..5.0V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
09	-	FDZ4.7T	Zener diode	4.4..5.0V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Fis
09	-	LM3Z4V7T1G	Zener diode	4.4..5V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
09	-	LM5Z4V7T1G	Zener diode	4.4..5 5V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
09	-	MM3Z4V7	Zener diode	4.4..5.0V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Sec
09	-	MM5Z4V7	Zener diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-523	6d	1u	Wtr
09	-	MMPZ5230BPT	Zener diode	4.465..4.935V, Izt=5mA, Zzt=70Ω, 225mW	SOD-323	5d	1a	Chm
09	-	ZD04V7	Zener diode	4.4..5.0V, 5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Cys
090A	-	TSP090SA	Thy-SPD	V Of-St=90V, 50A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
090B	-	TSP090SB	Thy-SPD	V Of-St=90V, 80A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
090C	-	TSP090SC	Thy-SPD	V Of-St=90V, 100A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
091	-	HZU9A1L	Zener diode	7.7..8.1V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
092	-	HZU9A2L	Zener diode	7.9..8.3V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
093	-	HZU9A3L	Zener diode	8.1..8.5V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
094	-	HZU9B1L	Zener diode	8.3..8.7V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
095	-	HZU9B2L	Zener diode	8.5..8.9V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
096	-	HZU9B3L	Zener diode	8.7..9.1V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
097	-	HZU9C1L	Zener diode	8.9..9.3V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
098	-	HZU9C2L	Zener diode	9.1..9.5V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
099	-	1PMT4099	Zener diode	6.8V±5%, Izt=122.5mA, 1W	DO-216	4d	1a	Msc
099	-	HZU9C3L	Zener diode	9.3..9.7V, Izt=0.5mA, Zzt=60Ω, 150mW	URP	5d	1a	Ren
09A	-	BAP64-02	PIN-diode	RF, 175V, 100mA, 715mW, 0.35pF, 2Ω(10mA/100MHz)	SOD-523	6d	1a	Phi
09A	-	HVU359	C-diode	VCXO, 15V, 24.8/29.8pF(1V)	SOD-323	5d	1a	Ren
09A	-	P0900SAA	Thy-SPD	Vdrm=75V, Vs=98V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Vs
09A	-	UMA9.0A	TVS	Vrwm=9.0V, Vbr=10.0..15.4V, 32.6A, 500W(1ms)	UltraMite	14d	1v	Msc
09CA	-	UMA9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..15.4V, 32.6A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
0A	-	BZX384C5V1	Zener diode	4.8..5.4V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
0A	-	FDZ5.1T	Zener diode	4.8..5.4V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	1a	Fis
0A	-	LM3Z5V1T1G	Zener diode	4.8..5.4V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
0A	-	LM5Z5V1T1G	Zener diode	4.8..5.4V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
0A	-	MM1Z9V1B	Zener diode	9.1V±2%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Sme
0A	-	MM3Z5V1	Zener diode	4.8..5.4V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	1a	Sec
0A	-	MM5Z5V1	Zener diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 200mW	SOD-523	6d	1u	Wtr
0A	-	MMPZ5231BPT	Zener diode	4.845..5.355V, Izt=5mA, Zzt=50Ω, 225mW	SOD-323	5d	1a	Chm
0A	-	ZD05V1	Zener diode	4.8..5.4V, 5mA, Zzt=60Ω, 200mW	SOD-323	5d	1a	Cys
0B	-	MM1Z10B	Zener diode	10V±2%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Sme
0C	-	BZX384C5V6	Zener diode	5.2..6.0V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
0C	-	FDZ5.6T	Zener diode	5.2..6.0V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Fis
0C	-	LM3Z5V6T1G	Zener diode	5.2..6V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
0C	-	LM5Z5V6T1G	Zener diode	5.2..6 5V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
0C	-	MM1Z11B	Zener diode	11V±2%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Sme
0C	-	MM3Z5V6	Zener diode	5.2..6.0V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Sec
0C	-	MM5Z5V6	Zener diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-523	6d	1u	Wtr
0C	-	MMPZ5232BPT	Zener diode	5.320..5.880V, Izt=5mA, Zzt=25Ω, 225mW	SOD-323	5d	1a	Chm
0C	-	ZD05V6	Zener diode	5.2..6.0V, 5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Cys
0D	-	MM1Z12B	Zener diode	12V±2%, Izt=5mA, Zzt=35Ω, 500mW	SOD-123FL	7d	1a	Sme
0E	-	BZX384C6V2	Zener diode	5.8..6.6V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
0E	-	FDZ6.2T	Zener diode	5.8..6.6V, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Fis
0E	-	LM3Z6V2T1G	Zener diode	5.8..6.6V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
0E	-	LM5Z6V2T1G	Zener diode	5.8..6.6V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
0E	-	MM1Z13B	Zener diode	13V±2%, Izt=5mA, Zzt=35Ω, 500mW	SOD-123FL	7d	1a	Sme
0E	-	MM3Z6V2	Zener diode	5.8..6.6V, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Sec
0E	-	MM5Z6V2	Zener diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-523	6d	1u	Wtr
0E	-	MMPZ5234BPT	Zener diode	5.890..6.510V, Izt=5mA, Zzt=10Ω, 225mW	SOD-323	5d	1a	Chm
0E	-	ZD06V2	Zener diode	5.8..6.6V, 5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Cys

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
0F	-	BZX384C6V8	Zener diode	6.4..7.2V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
0F	-	FDZ6.8T	Zener diode	6.4..7.2V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Fis
0F	-	LM5Z6V8T1G	Zener diode	6.4..7.2V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
0F	-	MM1Z15B	Zener diode	15V±2%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123FL	7d	1a	Sme
0F	-	MM3Z6V8	Zener diode	6.4..7.2V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Sec
0F	-	MM5Z6V8	Zener diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1u	Wtr
0F	-	MMPZ5235BPT	Zener diode	6.460..7.140V, Izt=5mA, Zzt=8Ω, 225mW	SOD-323	5d	1a	Chm
0F	-	ZD06V8	Zener diode	6.4..7.2V, 5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Cys
0G	-	BZX384C7V5	Zener diode	7.0..7.9V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
0G	-	FDZ7.5T	Zener diode	7.0..7.9V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Fis
0G	-	LM3Z7V5T1G	Zener diode	7..7.9V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
0G	-	LM5Z7V5T1G	Zener diode	7 7..9 5V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
0G	-	MM3Z7V5	Zener diode	7.0..7.9V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Sec
0G	-	MM5Z7V5	Zener diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1u	Wtr
0G	-	MMPZ5236BPT	Zener diode	7.125..7.875V, Izt=5mA, Zzt=7Ω, 225mW	SOD-323	5d	1a	Chm
0G	-	PD3Z284C5V1	Zener diode	5.1..5.4V, 5mA, Zzt=60, 500mW	PowDI323	7d	1d	Di
0G	-	ZD07V5	Zener diode	7.0..7.9V, 5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Cys
0H	-	BZX384C8V2	Zener diode	7.7..8.7V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
0H	-	FDZ8.2T	Zener diode	7.7..8.7V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Fis
0H	-	LM3Z8V2T1G	Zener diode	7.7..8.7V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
0H	-	LM5Z8V2T1G	Zener diode	7.7..8.7V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
0H	-	MM1Z16B	Zener diode	16V±2%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123FL	7d	1a	Sme
0H	-	MM3Z2V0	Zener diode	1.91..2.09V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Sec
0H	-	MM3Z8V2	Zener diode	7.7..8.7V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Sec
0H	-	MM5Z8V2	Zener diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1u	Wtr
0H	-	MMPZ5237BPT	Zener diode	7.790..8.610V, Izt=5mA, Zzt=7Ω, 225mW	SOD-323	5d	1a	Chm
0H	-	PD3Z284C5V6	Zener diode	5.6..6.0V, 5mA, Zzt=40, 500mW	PowDI323	7d	1d	Di
0H	-	ZD08V2	Zener diode	7.7..8.7V, 5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Cys
0J	-	MM1Z18B	Zener diode	18V±2%, Izt=5mA, Zzt=45Ω, 500mW	SOD-123FL	7d	1a	Sme
0K	-	BZX384C9V1	Zener diode	8.5..9.6V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
0K	-	FDZ9.1T	Zener diode	8.5..9.6V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Fis
0K	-	LM3Z9V1T1G	Zener diode	8.5..9.6V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
0K	-	LM5Z9V1T1G	Zener diode	8.5..9.6V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
0K	-	MM1Z20B	Zener diode	20V±2%, Izt=5mA, Zzt=50Ω, 500mW	SOD-123FL	7d	1a	Sme
0K	-	MM3Z9V1	Zener diode	8.5..9.6V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Sec
0K	-	MM5Z9V1	Zener diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1u	Wtr
0K	-	MMPZ5239BPT	Zener diode	8.645..9.555V, Izt=5mA, Zzt=10Ω, 225mW	SOD-323	5d	1a	Chm
0K	-	PD3Z284C6V2	Zener diode	6.2..6.6V, 5mA, Zzt=10, 500mW	PowDI323	7d	1d	Di
0K	-	ZD09V1	Zener diode	8.5..9.6V, 5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Cys
0L	-	BZX384C10	Zener diode	9.4..10.6V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
0L	-	FDZ10T	Zener diode	9.4..10.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Fis
0L	-	LM3Z10VT1G	Zener diode	9.4..10.6V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
0L	-	LM5Z10VT1G	Zener diode	9.4..10.6V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
0L	-	MM3Z10V	Zener diode	9.4..10.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Sec
0L	-	MM5Z10V	Zener diode	10V±5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-523	6d	1u	Wtr
0L	-	MMPZ5240BPT	Zener diode	9.500..10.50V, Izt=5mA, Zzt=15Ω, 225mW	SOD-323	5d	1a	Chm
0L	-	PD3Z284C6V8	Zener diode	6.8..7.2V, 5mA, Zzt=15, 500mW	PowDI323	7d	1d	Di
0L	-	ZD10V0	Zener diode	9.4..10.6V, 5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Cys
0M	-	BZX384C11	Zener diode	10.4..11.6V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
0M	-	FDZ11T	Zener diode	10.4..11.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Fis
0M	-	LM3Z11VT1G	Zener diode	10.4..11.6V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
0M	-	LM5Z11VT1G	Zener diode	10.4..11.6V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
0M	-	MM1Z22B	Zener diode	22V±2%, Izt=5mA, Zzt=55Ω, 500mW	SOD-123FL	7d	1a	Sme
0M	-	MM3Z11V	Zener diode	10.4..11.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Sec
0M	-	MM5Z11V	Zener diode	11V±5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-523	6d	1u	Wtr
0M	-	MMPZ5241BPT	Zener diode	10.45..11.55V, Izt=5mA, Zzt=18Ω, 225mW	SOD-323	5d	1a	Chm
0M	-	PD3Z284C7V5	Zener diode	7.5..7.9V, 5mA, Zzt=10, 500mW	PowDI323	7d	1d	Di
0M	-	ZD11V0	Zener diode	10.4..11.6V, 5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Cys
0N	-	BZX384C12	Zener diode	11.4..12.7V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
0N	-	FDZ12T	Zener diode	11.4..12.7V, Izt=5mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Fis
0N	-	LM3Z12VT1G	Zener diode	11.4..12.7V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
0N	-	LM5Z12VT1G	Zener diode	11.4..12.7V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
0N	-	MM1Z24B	Zener diode	24V±2%, Izt=5mA, Zzt=60Ω, 500mW	SOD-123FL	7d	1a	Sme
0N	-	MM3Z12V	Zener diode	11.4..12.7V, Izt=5mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Sec
0N	-	MM5Z12V	Zener diode	12V±5%, Izt=5mA, Zzt=25Ω, 200mW	SOD-523	6d	1u	Wtr
0N	-	MMPZ5242BPT	Zener diode	11.40..12.60V, Izt=5mA, Zzt=22Ω, 225mW	SOD-323	5d	1a	Chm
0N	-	PD3Z284C8V2	Zener diode	8.2..8.7V, 5mA, Zzt=10, 500mW	PowDI323	7d	1d	Di
0N	-	ZD12V0	Zener diode	11.4..12.7V, 5mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Cys
0P	-	BZX384C13	Zener diode	12.4..14.1V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
0P	-	FDZ13T	Zener diode	12.4..14.1V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Fis

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
0P	-	LM3Z13VT1G	Zener diode	12.4..14.1V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
0P	-	LM5Z13VT1G	Zener diode	12.4..14.1V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
0P	-	MM1Z27B	Zener diode	27V±2%, Izt=5mA, Zzt=70Ω, 500mW	SOD-123FL	7d	1a	Sme
0P	-	MM3Z13V	Zener diode	12.4..14.1V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Sec
0P	-	MM5Z13V	Zener diode	13V±5%, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	6d	1u	Wtr
0P	-	MMPZ5243BPT	Zener diode	12.35..13.65V, Izt=5mA, Zzt=25Ω, 225mW	SOD-323	5d	1a	Chm
0P	-	PD3Z284C9V1	Zener diode	9.1..9.6V, 5mA, Zzt=10, 500mW	PowDI323	7d	1d	Di
0P	-	ZD13V2	Zener diode	12.4..14.1V, 5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Cys
0Q	-	PD3Z284C10	Zener diode	10..10.6V, 5mA, Zzt=10Ω, 500mW	PowDI323	7d	1d	Di
0R	-	MM1Z30B	Zener diode	30V±2%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Sme
0R	-	PD3Z284C11	Zener diode	11..11.6V, 5mA, Zzt=10, 500mW	PowDI323	7d	1d	Di
0S	-	PD3Z284C12	Zener diode	12..12.7V, 5mA, Zzt=10, 500mW	PowDI323	7d	1d	Di
0T	-	BZX384C15	Zener diode	14.3..15.8V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
0T	-	FDZ15T	Zener diode	14.3..15.8V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Fis
0T	-	LM3Z15VT1G	Zener diode	14.3..15.8V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
0T	-	LM5Z15VT1G	Zener diode	14.3..15.8V, Izt=5mA, 200mW	SOD-523	6d	1g	Lrc
0T	-	MM3Z15V	Zener diode	14.3..15.8V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Sec
0T	-	MM5Z15V	Zener diode	15V±5%, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	6d	1u	Wtr
0T	-	MMPZ5245BPT	Zener diode	14.25..15.75V, Izt=5mA, Zzt=32Ω, 225mW	SOD-323	5d	1a	Chm
0T	-	ZD15V0	Zener diode	14.3..15.8V, 5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Cys
0U	-	BZX384C16	Zener diode	15.3..17.1V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
0U	-	FDZ16T	Zener diode	15.3..17.1V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Fis
0U	-	LM3Z16VT1G	Zener diode	15.3..17.1V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
0U	-	LM5Z16VT1G	Zener diode	15.3..17.1V, Izt=2mA, 200mW	SOD-523	6d	1g	Lrc
0U	-	MM3Z16V	Zener diode	15.3..17.1V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Sec
0U	-	MM5Z16V	Zener diode	16V±5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-523	6d	1u	Wtr
0U	-	MMPZ5246BPT	Zener diode	15.20..16.80V, Izt=5mA, Zzt=36Ω, 225mW	SOD-323	5d	1a	Chm
0U	-	ZD16V2	Zener diode	15.3..17.1V, 5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Cys
0W	-	BZX384C18	Zener diode	16.8..19.1V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
0W	-	FDZ18T	Zener diode	16.8..19.1V, Izt=5mA, Zzt=45Ω, 200mW	SOD-323	5d	1a	Fis
0W	-	LM3Z18VT1G	Zener diode	16.8..19.1V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
0W	-	LM5Z18VT1G	Zener diode	16.8..19.1V, Izt=2mA, 200mW	SOD-523	6d	1g	Lrc
0W	-	MM3Z18V	Zener diode	16.8..19.1V, Izt=5mA, Zzt=45Ω, 200mW	SOD-323	5d	1a	Sec
0W	-	MM5Z18V	Zener diode	18V±5%, Izt=5mA, Zzt=45Ω, 200mW	SOD-523	6d	1u	Wtr
0W	-	MMPZ5248BPT	Zener diode	17.10..18.90V, Izt=5mA, Zzt=42Ω, 225mW	SOD-323	5d	1a	Chm
0W	-	ZD18V0	Zener diode	16.8..19.1V, 5mA, Zzt=45Ω, 200mW	SOD-323	5d	1a	Cys
0X	-	MM1Z33B	Zener diode	33V±2%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Sme
0Y	-	KDZ10VVY	Zener diode	9.77..10.21V, Izt=5mA, Zzt=15Ω, 100mW	VSC	7d	1a	Kec
0Y	-	MM1Z36B	Zener diode	36V±2%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Sme
0Z	-	BZT52B2V4S	Zener diode	2.35..2.45V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323FL	7d	1a	Tsc
0Z	-	BZX384C20	Zener diode	18.8..21.2V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
0Z	-	FDZ20T	Zener diode	18.8..21.2V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Fis
0Z	-	LM3Z20VT1G	Zener diode	18.8..21.2V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
0Z	-	LM5Z20VT1G	Zener diode	18.8..21.2V, Izt=2mA, 200mW	SOD-523	6d	1g	Lrc
0Z	-	MM1Z39B	Zener diode	39V±2%, Izt=2.5mA, Zzt=100Ω, 500mW	SOD-123FL	7d	1a	Sme
0Z	-	MM3Z20V	Zener diode	18.8..21.2V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Sec
0Z	-	MM3Z2V4B	Zener diode	2.35..2.45V, Zzt=94Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
0Z	-	MM3Z2V4BW	Zener diode	2.35..2.45V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323FL	7d	1a	Tac
0Z	-	MM5Z20V	Zener diode	20V±5%, Izt=5mA, Zzt=55Ω, 200mW	SOD-523	6d	1u	Wtr
0Z	-	MMPZ5250BPT	Zener diode	19.0..21.0V, Izt=5mA, Zzt=48Ω, 225mW	SOD-323	5d	1a	Chm
0Z	-	TCMM3Z2V4B	Zener diode	2.4V±2%, Izt=5mA, Zzt=94Ω, 200mW	SOD-323FL	7d	1a	Tac
0Z	-	ZD20V0	Zener diode	18.8..21.2V, 5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Cys
1	-	BA277	PIN-diode	VHF-band-Sw, 35V, 100mA, 715mW, 1.2pF, 0.7Ω(2mA/100MHz)	SOD-523	6d	1a	Phi
1	-	BB669	C-diode	VHF-tuning, Hyperband, 35V, 2.7/56pF(28/1V)	SOD-123	5d	1a	Sie
1	-	CH501G-40PT	Si-diode	SBD, 45V, 100mA, Vf<0.55V(100mA)	SOD-723	8d	1a	Chm
1	-	GBLC18	TVS	Vrwm=18V, 8A, 350W(1ms), 3pF	SOD-323	5d	1a	Prt
1	-	MMPZ5222SPT	Zener diode	2.450..2.550V, Izt=5mA, Zzt=100Ω, 225mW	SOD-323	5d	1a	Chm
1	-	MMSZ5243BPT	Zener diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 225mW	SOD-523	6d	1a	Chm
1	-	SPE0511D52RG	ESDP-diode	Vrwm=15V, Vbr=6..8.5V, 7A, 250W(1ms)	SOD-523	6d	1a	Syn
1	au	CDZ3.9B	Zener diode	3.9V±2.5%, Izt=40mA, 1W	VMN	7d	1s	Rhm
1.	-	MMSZ5243SPT	Zener diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 225mW	SOD-523	6d	1a	Chm
1.8G	-	ZD1.8G-CA2	Zener diode	1.8V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
1.8G	-	ZD1.8G-CB2	Zener diode	1.8V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
1.8L	-	ZD1.8L-CA2	Zener diode	1.8V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
1.8L	-	ZD1.8L-CB2	Zener diode	1.8V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
10	-	BZX384C22	Zener diode	20.8..23.3V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
10	-	BZY55-C10	Zener diode	9.50..10.50V, Izt=5mA, Zzt=15Ω, 500mW	0805	70d	2d	Tsc
10	-	CDZ55C10	Zener diode	9.50..10.50V, Zzt=15Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
10	-	CDZ55C10S	Zener diode	9.50..10.50V, Zzt=15Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
10	-	CDZ55C10T	Zener diode	9.50..10.50V, Zzt=15Ω, Izt=5mA, 200mW	0603	70d	2d	Crp

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
10	-	CTZ55C10	Zener diode	9.50..10.50V, Izt=5mA, Zzt=15Ω, 500mW	1206	70d	2d	Ctc
10	-	CZRNC55C10-G	Zener diode	9.50..10.50V, Zt=15Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
10	-	CZRSC55C10-G	Zener diode	9.50..10.50V, Zt=15Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
10	-	FDZ22T	Zener diode	20.8..23.3V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Fis
10	-	FM1100-M	Si-diode	SBR, 100V, 1.0A, Vf<0.85V(1A)	SOD-123L	10d	1a	Tfr
10	-	HZU10G	Zener diode	9.45..10.55V, Izt=5mA, 200mW	SOD-323	5d	1a	Ren
10	-	KDZ10EV	Zener diode	9.4..10.6V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
10	-	KDZ10V	Zener diode	9.4..10.6V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
10	-	KDZ10VV	Zener diode	9.40..10.60V, Izt=5mA, Zzt=15Ω, 100mW	VSC	7d	1a	Kec
10	-	LM3Z22VT1G	Zener diode	20.8..23.3V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
10	-	LM5Z22VT1G	Zener diode	20.8..23.3V, Izt=2mA, 200mW	SOD-523	6d	1g	Lrc
10	-	MAZ5100	Zener diode	9.4..10V, Zzt=8Ω(5mA), 500mW	MP2	11d	1a	Pan
10	-	MAZ81000H	Zener diode	10.07..10.59V, Zzt=30Ω(5mA), 150mW	SC-76	6d	1a	Pan
10	-	MAZF100	Zener diode	9.4..10.6V, Zzt=30Ω(5mA), 120mW	S-Mini	8d	1a	Pan
10	-	MAZN100	Zener diode	9.4..10.6V, Zzt=30Ω(5mA), 120mW	SSMini2	7d	1a	Pan
10	-	MAZS100	Zener diode	9.4..10.6V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
10	-	MAZY100	Zener diode	9..11V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
10	-	MM3Z22V	Zener diode	20.8..23.3V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Sec
10	-	MM5Z22V	Zener diode	22V±5%, Izt=5mA, Zzt=55Ω, 200mW	SOD-523	6d	1u	Wtr
10	-	MMPZ5251BPT	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 225mW	SOD-323	5d	1a	Chm
10	-	P4SMA10	TVS	Vbr=9.00..11.0V, Vrwm=8.10V, 28.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
10	-	P6SMBJ10	TVS	Vrwm=10V, Vbr=9..11V, 40A, 600W(1ms)	DO-214AA	1d	1n	Lif
10	-	SMBG10	TVS	Vrwm=10V, Vbr=11.1..14.1V, 31.9A, 600W(1ms)	DO-215AA	5d	1a	Msc
10	-	SML4740	Zener diode	10V±5%, Izt=25mA, Zzt=7Ω, 1W	DO-214AC	1d	1k	Vs
10	-	TZD10WS	Zener diode	9.40..10.60V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Ttr
10	-	TZD10WT	Zener diode	9.40..10.60V, Izt=5mA, Zzt=15Ω, 150mW	SOD-523	6d	1a	Ttr
10	-	TZD10WU	Zener diode	9.77..10.21V, Izt=5mA, Zzt=30Ω, 100mW	SOD-723	7d	1a	Ttr
10	-	U1ZB10	Zener diode	9..11V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos
10	-	USFZ10V	Zener diode	10V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
10	-	ZD22V0	Zener diode	20.8..23.3V, 5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Cys
10	ah	HZC10	Zener diode	10V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
10	ay	CRZ10	Zener diode	9..11V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
10-	-	MAZ81000M	Zener diode	9.75..10.25V, Zzt=30Ω(5mA), 150mW	SC-76	6d	1a	Pan
10-	-	MAZ8100GML	Zener diode	9.75..10.25V, Zzt=30Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
10-	-	MAZS1000M	Zener diode	9.75..10.25V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
10^	-	MAZ81000H	Zener diode	10.07..10.59V, Zzt=30Ω(5mA), 150mW	SC-76	6d	1a	Pan
10^	-	MAZ8100GHL	Zener diode	10.07..10.59V, Zzt=30Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
10^	-	MAZS1000H	Zener diode	10.07..10.59V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
10_	-	MAZ81000L	Zener diode	9.44..9.92V, Zzt=30Ω(5mA), 150mW	SC-76	6d	1a	Pan
10_	-	MAZ8100GLL	Zener diode	9.44..9.92V, Zzt=30Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
10_	-	MAZS1000L	Zener diode	9.44..9.92 5V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
10•	-	RKZ10B2KG	Zener diode	9.77..10.21V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	2e	Ren
10•	-	RKZ10B2KJ	Zener diode	9.77..10.21V, Izt=5mA, Zzt=30Ω, 150mW	UFP	7d	2e	Ren
10•	-	TZD10YWS	Zener diode	9.77..10.21V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Ttr
10•	-	TZD10YWT	Zener diode	9.77..10.21V, Izt=5mA, Zzt=15Ω, 150mW	SOD-523	6d	1a	Ttr
10•	ai	HZU10B1	Zener diode	9.45..9.87V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
10•	aj	HZU10B2	Zener diode	9.77..10.21V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
10•	ak	HZU10B3	Zener diode	10.11..10.55V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
100	-	1PMT4100	Zener diode	7.5V±5%, Izt=111.5mA, 1W	DO-216	4d	1a	Msc
100	-	MMF100A	TVS	Vrwm=100V, Vbr=111.0..128.0V, Ipp=1.1A, 200W(1ms)	SOD-123FL	7d	2m	Sst
100	-	P4SMA100	TVS	Vbr=90.0..110V, Vrwm=81.0V, 2.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
100	-	P6SMBJ100	TVS	Vrwm=100V, Vbr=90..110V, 4.2A, 600W(1ms)	DO-214AA	1d	1n	Lif
100	-	SMBG100	TVS	Vrwm=100V, Vbr=111..128.0V, 3.7A, 600W(1ms)	DO-215AA	5d	1a	Msc
100	-	SMF100A	TVS	Vbr=111..123V, Vrwm=100V, Ipp=1.1A, 200W(1ms)	SOD-123FL	7d	1a	Mco
100	-	SML4764	Zener diode	100V±5%, Izt=2.5mA, Zzt=350Ω, 1W	DO-214AC	1d	1k	Vs
100	-	U1ZB100	Zener diode	90..110V, Izt=3mA, 1W	3-4D1A	1d	2fa	Tos
100A	-	1.5SMC100A	TVS	Vrwm=85.5V, Vbr=95..105V, Ipp=11A, 1500W(1ms)	DO-214AB	1d	1k	Vs
100A	-	1.5SMC100A	TVS	Vrwm=85.5V, Vbr=95..105V, Ipp=11A, 1500W(1ms)	DO-214AB	1d	2s	Lif
100A	-	1.5SMC100A	TVS	Vrwm=85.5V, Vbr=95..105V, Ipp=11A, 1500W(1ms)	DO-214AB	1d	1b	Mde
100A	-	1SMC100A	TVS	Vbr=111..123V, Vrwm=100V, 9.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
100A	-	P4SMA100A	TVS	Vbr=95.0..105V, Vrwm=85.5V, 3.1A, 400W(1ms)	DO-214AC	1d	1a	Eic
100A	-	P4SMA100A	TVS	Vbr=95.0..105V, Vrwm=85.5V, 3.1A, 400W(1ms)	DO-214AC	1d	1k	Vs
100A	-	P6SMB100A	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms)	DO-214AA	1d	1k	Vs
100A	-	P6SMB100A	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms)	403A	3d	1s	Ons
100A	-	P6SMBJ100A	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms)	DO-214AA	1d	1n	Lif
100A	-	SMAJ100A	TVS	Vrwm=100V, Vbr=111..123V, 2.5A, 400W(1ms)	DO-214AC	1d	1a	Sus
100A	-	SMAJP4KE100A	TVS	Vrwm=85.50V, Vbr=95.0..105.0V, Ipp=3.0A, 400W(1ms)	DO-214AC	1d	1a	Mco
100A	-	SMBG100A	TVS	Vrwm=100V, Vbr=111..128V, 3.7A, 600W(1ms)	DO-215AA	5d	1a	Msc
100A	-	SMBJ100A	TVS	Vrwm=100V, Vbr=111..128.0V, 3.7A, 600W(1ms)	DO-214AA	1d	1a	Sus
100A	-	SMBJP6KE100A	TVS	Vrwm=85.50V, Vbr=95.0..105.0V, Ipp=4.5A, 600W(1ms)	DO-214AA	1d	1a	Mco

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
100A	-	SMCJ1.5KE100A	TVS	Vrwm=85.50V, Vbr=95.0..105.0V, Ipp=11.1A, 1500W(1ms)	DO-214AB	1d	1a	Mco
100A	-	SMCJ100A	TVS	Vrwm=100V, Vbr=111..136V, 8.4A, 1500W(1ms)	DO-214AB	1d	1k	Sus
100A	-	SZP6SMB100A	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms)	403A	3d	1s	Ons
100A	-	TVP04A101A-G	TVS	Vbr=95.00..105.0V, Vrwm=85.5V, Ipp=2.92A, 400W(1ms)	DO-214AC	1d	2o	Cmc
100A	-	TVP06B101A-G	TVS	Vrwm=85.5V, Vbr=95.0..105.0V, Ipp=4.38A, 600W(1ms)	DO-214AA	1d	2o	Cmc
100A	-	UMA100A	TVS	Vrwm=100V, Vbr=111..162V, 3.1A, 500W(1ms)	UltraMite	14d	1v	Msc
100B	-	1SMB3EZ100	Zener diode	100V±5%, Zzt=175Ω, Izt=7.5mA, 3W	DO-214AA	1d	1a	Pjt
100C	-	1.5SMC100CA	TVS	Vrwm=85.5V, Vbr=95..105V, Ipp=11A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
100C	-	1.5SMC100CA	TVS	Vrwm=85.5V, Vbr=95..105V, Ipp=11A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
100C	-	1.5SMC100CA	TVS	Vrwm=85.5V, Vbr=95..105V, Ipp=11A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
100C	-	MMF100CA	TVS	Vrwm=100V, Vbr=111.0..128.0V, Ipp=1.1A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
100C	-	P4SMA100C	TVS	Vbr=90.0..110V, Vrwm=81.0V, 2.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
100C	-	P4SMA100CA	TVS	Vbr=95.0..105V, Vrwm=85.5V, 3.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
100C	-	P6SMB100CA	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
100C	-	P6SMBJ100C	TVS	Vrwm=100V, Vbr=90..110V, 4.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
100C	-	SMAJP4KE100CA	TVS	Vrwm=85.50V, Vbr=95.0..105.0V, Ipp=3.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
100C	-	SMBG100C	TVS	Vrwm=100V, Vbr=111..128V, 3.4A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
100C	-	SMBJP6KE100CA	TVS	Vrwm=85.50V, Vbr=95.0..105.0V, Ipp=4.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
100C	-	SMCJ1.5KE100CA	TVS	Vrwm=85.50V, Vbr=95.0..105.0V, Ipp=11.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
100C	-	SMF100CA	TVS	Vbr=111..123V, Vrwm=100V, Ipp=1.1A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
100C	-	TVP04A101CA-G	TVS	Vbr=95.00..105.0V, Vrwm=85.5V, Ipp=2.92A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
100C	-	TVP06B101ACA-G	TVS	Vrwm=85.5V, Vbr=95.0..105.0V, Ipp=4.38A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
100CA	-	1SMC100CA	TVS	Vbr=111..123V, Vrwm=100V, 9.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
100CA	-	P4SMA100CA	TVS	Vbr=95.0..105V, Vrwm=85.5V, 3.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
100CA	-	P6SMB100CA	TVS	Vbr=95.0..105V, Vrwm=85.5V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
100CA	-	P6SMBJ100CA	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
100CA	-	SMAJ100CA	TVS	Vrwm=100V, Vbr=111..123V, 2.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
100CA	-	SMBG100CA	TVS	Vrwm=100V, Vbr=111..128V, 3.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
100CA	-	SMBJ100CA	TVS	Vrwm=100V, Vbr=111..128V, 3.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
100CA	-	SMCJ100CA	TVS	Vrwm=100V, Vbr=111..136V, 8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
100CA	-	UMA100CA	TVS	Vrwm=100V, Vbr=111..162V, 3.1A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
100V	-	SMA100	TVS	Vbr=111..136V, Vrwm=100.0V, 1.7A, 300W(1ms)	DO-214AC	1d	1a	Mic
100V	-	SMB100	TVS	Vbr=111..136V, Vrwm=100V, 3.4A, 600W(1ms)	DO-214AA	1d	1a	Mic
100V	-	SMC100	TVS	Vbr=111..136V, Vrwm=100V, 8.4A, 1500W(1ms)	DO-214AB	1d	1a	Mic
100VA	-	SMA100A	TVS	Vbr=111..123V, Vrwm=100.0V, 1.9A, 300W(1ms)	DO-214AC	1d	1a	Mic
100VA	-	SMB100A	TVS	Vbr=111..123V, Vrwm=100V, 3.7A, 600W(1ms)	DO-214AA	1d	1a	Mic
100VA	-	SMC100A	TVS	Vbr=111..123V, Vrwm=100V, 9.3A, 1500W(1ms),	DO-214AB	1d	1a	Mic
100VC	-	SMA100C	TVS	Vbr=111..136V, Vrwm=100.0V, 1.7A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
100VC	-	SMB100C	TVS	Vbr=111..136V, Vrwm=100V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
100VC	-	SMC100C	TVS	Vbr=111..136V, Vrwm=100V, 8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
100VCA	-	SMA100CA	TVS	Vbr=111..123V, Vrwm=100.0V, 1.9A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
100VCA	-	SMB100CA	TVS	Vbr=111..123V, Vrwm=100V, 3.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
100VCA	-	SMC100CA	TVS	Vbr=111..123V, Vrwm=100V, 9.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
101	-	1PMT4101	Zener diode	8.2V±5%, Izt=100.6mA, 1W	DO-216	4d	1a	Msc
1010	-	SZ1010	Zener diode	10V±10%, Zzt=7.0Ω, Izt=91mA, 1W	DO-214AC	1d	1a	Eic
1011	-	SZ1011	Zener diode	11V±10%, Zzt=8.0Ω, Izt=83mA, 1W	DO-214AC	1d	1a	Eic
1012	-	SZ1012	Zener diode	12V±10%, Zzt=9.0Ω, Izt=76mA, 1W	DO-214AC	1d	1a	Eic
1013	-	SZ1013	Zener diode	13V±10%, Zzt=10Ω, Izt=69mA, 1W	DO-214AC	1d	1a	Eic
1015	-	SZ1015	Zener diode	15V±10%, Zzt=14Ω, Izt=61mA, 1W	DO-214AC	1d	1a	Eic
1016	-	SZ1016	Zener diode	16V±10%, Zzt=16Ω, Izt=57mA, 1W	DO-214AC	1d	1a	Eic
1018	-	SZ1018	Zener diode	18V±10%, Zzt=20Ω, Izt=50mA, 1W	DO-214AC	1d	1a	Eic
102	-	1PMT4102	Zener diode	8.7V±5%, Izt=96.2mA, 1W	DO-216	4d	1a	Msc
1020	-	SZ1020	Zener diode	20V±10%, Zzt=22Ω, Izt=45mA, 1W	DO-214AC	1d	1a	Eic
1022	-	SZ1022	Zener diode	22V±10%, Zzt=23Ω, Izt=41mA, 1W	DO-214AC	1d	1a	Eic
1024	-	SZ1024	Zener diode	24V±10%, Zzt=25Ω, Izt=38mA, 1W	DO-214AC	1d	1a	Eic
1027	-	SZ1027	Zener diode	27V±10%, Zzt=35Ω, Izt=34mA, 1W	DO-214AC	1d	1a	Eic
103	-	1PMT4103	Zener diode	9.1V±5%, Izt=91.9mA, 1W	DO-216	4d	1a	Msc
1030	-	SZ1030	Zener diode	30V±10%, Zzt=40Ω, Izt=30mA, 1W	DO-214AC	1d	1a	Eic
1033	-	SZ1033	Zener diode	33V±10%, Zzt=45Ω, Izt=27mA, 1W	DO-214AC	1d	1a	Eic
1036	-	SZ1036	Zener diode	36V±10%, Zzt=50Ω, Izt=25mA, 1W	DO-214AC	1d	1a	Eic
1039	-	SZ1039	Zener diode	39V±10%, Zzt=60Ω, Izt=23mA, 1W	DO-214AC	1d	1a	Eic
103D	-	SZ103D	Zener diode	3.3V±10%, Zzt=10Ω, Izt=276mA, 1W	DO-214AC	1d	1a	Eic
103G	-	SZ103G	Zener diode	3.6V±10%, Zzt=10Ω, Izt=252mA, 1W	DO-214AC	1d	1a	Eic
103J	-	SZ103J	Zener diode	3.9V±10%, Zzt=9.0Ω, Izt=234mA, 1W	DO-214AC	1d	1a	Eic
104	-	1PMT4104	Zener diode	10V±5%, Izt=83.1mA, 1W	DO-216	4d	1a	Msc
1043	-	SZ1043	Zener diode	43V±10%, Zzt=70Ω, Izt=22mA, 1W	DO-214AC	1d	1a	Eic
1047	-	SZ1047	Zener diode	47V±10%, Zzt=80Ω, Izt=19mA, 1W	DO-214AC	1d	1a	Eic
104D	-	SZ104D	Zener diode	4.3V±10%, Zzt=9.0Ω, Izt=217mA, 1W	DO-214AC	1d	1a	Eic
104H	-	SZ104H	Zener diode	4.7V±10%, Zzt=8.0Ω, Izt=193mA, 1W	DO-214AC	1d	1a	Eic
105	-	1PMT4105	Zener diode	11V±5%, Izt=76.5mA, 1W	DO-216	4d	1a	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
1051	-	SZ1051	Zener diode	51V±10%, Zzt=95Ω, Izt=18mA, 1W	DO-214AC	1d	1a	Eic
1056	-	SZ1056	Zener diode	56V±10%, Zzt=110Ω, Izt=16mA, 1W	DO-214AC	1d	1a	Eic
105B	-	SZ105B	Zener diode	5.1V±10%, Zzt=7.0Ω, Izt=178mA, 1W	DO-214AC	1d	1a	Eic
105G	-	SZ105G	Zener diode	5.6V±10%, Zzt=5.0Ω, Izt=162mA, 1W	DO-214AC	1d	1a	Eic
106	-	1PMT4106	Zener diode	12V±5%, Izt=69.9mA, 1W	DO-216	4d	1a	Msc
1062	-	SZ1062	Zener diode	62V±10%, Zzt=125Ω, Izt=14mA, 1W	DO-214AC	1d	1a	Eic
1068	-	SZ1068	Zener diode	68V±10%, Zzt=150Ω, Izt=13mA, 1W	DO-214AC	1d	1a	Eic
106C	-	SZ106C	Zener diode	6.2V±10%, Zzt=2.0Ω, Izt=146mA, 1W	DO-214AC	1d	1a	Eic
106I	-	SZ106I	Zener diode	6.8V±10%, Zzt=3.5Ω, Izt=133mA, 1W	DO-214AC	1d	1a	Eic
107	-	1PMT4107	Zener diode	13V±5%, Izt=63.4mA, 1W	DO-216	4d	1a	Msc
1075	-	SZ1075	Zener diode	75V±10%, Zzt=175Ω, Izt=12mA, 1W	DO-214AC	1d	1a	Eic
107F	-	SZ107F	Zener diode	7.5V±10%, Zzt=4.0Ω, Izt=121mA, 1W	DO-214AC	1d	1a	Eic
108	-	1PMT4108	Zener diode	14V±5%, Izt=59.0mA, 1W	DO-216	4d	1a	Msc
1082	-	SZ1082	Zener diode	82V±10%, Zzt=200Ω, Izt=11mA, 1W	DO-214AC	1d	1a	Eic
108C	-	SZ108C	Zener diode	8.2V±10%, Zzt=4.5Ω, Izt=110mA, 1W	DO-214AC	1d	1a	Eic
109	-	1PMT4109	Zener diode	15V±5%, Izt=54.8mA, 1W	DO-216	4d	1a	Msc
1091	-	SZ1091	Zener diode	91V±10%, Zzt=250Ω, Izt=10mA, 1W	DO-214AC	1d	1a	Eic
109B	-	SZ109B	Zener diode	9.1V±10%, Zzt=5.0Ω, Izt=100mA, 1W	DO-214AC	1d	1a	Eic
10A	-	1.5SMC10A	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, Ipp=103A, 1500W(1ms)	DO-214AB	1d	1k	Vs
10A	-	1.5SMC10A	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, Ipp=103A, 1500W(1ms)	DO-214AB	1d	1b	Mde
10A	-	1.5SMC10A	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, Ipp=103A, 1500W(1ms)	403	3d	2t	Ons
10A	-	1.5SMC10A	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, Ipp=103A, 1500W(1ms)	DO-214AB	1d	2s	Lif
10A	-	1SMC10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, 88.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
10A	-	MMF10A	TVS	Vrwm=10V, Vbr=11.1..12.8V, Ipp=11.8A, 200W(1ms)	SOD-123FL	7d	2m	Sst
10A	-	P4SMA10A	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 29.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
10A	-	P4SMA10A	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 29.0A, 400W(1ms)	DO-214AC	1d	1k	Vs
10A	-	P6SMB10A	TVS	Vrwm=10V, Vbr=9.5..10.5V, 41.4A, 600W(1ms)	DO-214AA	1d	1k	Vs
10A	-	P6SMB10A	TVS	Vrwm=10V, Vbr=9.5..10.5V, 41.4A, 600W(1ms)	403A	3d	1s	Ons
10A	-	P6SMBJ10A	TVS	Vrwm=10V, Vbr=9..11V, 40A, 600W(1ms)	DO-214AA	1d	1n	Lif
10A	-	RKZ10AKU	Zener diode	9.12..9.59V, Izt=20mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
10A	-	SMAJ10A	TVS	Vrwm=10V, Vbr=11.1..12.3V, 23.5A, 400W(1ms)	DO-214AC	1d	1j	Sus
10A	-	SMAJP4KE10A	TVS	Vrwm=8.55V, Vbr=9.50..10.50V, Ipp=28.3A, 400W(1ms)	DO-214AC	1d	1a	Mco
10A	-	SMBG10A	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms)	DO-215AA	5d	1a	Msc
10A	-	SMBJ10A	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms)	DO-214AA	1d	1a	Sus
10A	-	SMBJP6KE10A	TVS	Vrwm=8.55V, Vbr=9.50..10.50V, Ipp=42.1A, 600W(1ms)	DO-214AA	1d	1a	Mco
10A	-	SMCJ1.5KE10A	TVS	Vrwm=8.55V, Vbr=9.50..10.50V, Ipp=104.8A, 1500W(1ms)	DO-214AB	1d	1a	Mco
10A	-	SMCJ10A	TVS	Vrwm=10V, Vbr=11.1..13.6V, 79.8A, 1500W(1ms)	DO-214AB	1d	1k	Sus
10A	-	SMF10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, Ipp=11.8A, 200W(1ms)	SOD-123FL	7d	1a	Mco
10A	-	SZP6SMB10A	TVS	Vrwm=10V, Vbr=9.5..10.5V, 41.4A, 600W(1ms)	403A	3d	1s	Ons
10A	-	TVP04A100A-G	TVS	Vbr=9.50..10.50V, Vrwm=8.6V, Ipp=27.59A, 400W(1ms)	DO-214AC	1d	2o	Cmc
10A	-	TVP06B10A-G	TVS	Vrwm=8.6V, Vbr=9.50..10.50V, Ipp=41.38A, 600W(1ms)	DO-214AA	1d	2o	Cmc
10A	-	UMA10A	TVS	Vrwm=10V, Vbr=11.1..17.0V, 29.4A, 500W(1ms)	UltraMite	14d	1v	Msc
10B	-	HZF10BP	Zener diode	10V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
10B	-	PTZ10B	Zener diode	10V±10%, Izt=40mA, 1W	DO-214AC	1d	1a	Rhm
10B	-	RKZ10BKU	Zener diode	9.41..9.90V, Izt=20mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
10B	-	Z3SMB10B	Zener diode	9.50..10.50V, Izt=75mA, Zzt=4Ω, 3W	DO-214AA	1d	1a	Ttr
10B0	-	SZ10B0	Zener diode	100V±10%, Zzt=350Ω, Izt=9.0mA, 1W	DO-214AC	1d	1a	Eic
10B1	-	SZ10B1	Zener diode	110V±10%, Zzt=450Ω, Izt=8.6mA, 1W	DO-214AC	1d	1a	Eic
10B2	-	SZ10B2	Zener diode	120V±10%, Zzt=550Ω, Izt=7.8mA, 1W	DO-214AC	1d	1a	Eic
10B3	-	SZ10B3	Zener diode	130V±10%, Zzt=700Ω, Izt=7.0mA, 1W	DO-214AC	1d	1a	Eic
10B5	-	SZ10B5	Zener diode	150V±10%, Zzt=1000Ω, Izt=6.4mA, 1W	DO-214AC	1d	1a	Eic
10B6	-	SZ10B6	Zener diode	160V±10%, Zzt=1100Ω, Izt=5.8mA, 1W	DO-214AC	1d	1a	Eic
10B8	-	SZ10B8	Zener diode	180V±10%, Zzt=1200Ω, Izt=5.2mA, 1W	DO-214AC	1d	1a	Eic
10C	-	1.5SMC10CA	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, Ipp=103A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
10C	-	1.5SMC10CA	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, Ipp=103A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
10C	-	1.5SMC10CA	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, Ipp=103A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
10C	-	HZF10CP	Zener diode	10V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
10C	-	P4SMA10C	TVS	Vbr=9.00..11.0V, Vrwm=8.10V, 28.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
10C	-	P4SMA10CA	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 27.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
10C	-	P6SMB10CA	TVS	Vrwm=10V, Vbr=9.5..10.5V, 41.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
10C	-	P6SMBJ10C	TVS	Vrwm=10V, Vbr=9..11V, 40A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
10C	-	RKZ10CKU	Zener diode	9.70..10.20V, Izt=20mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
10C	-	SMAJP4KE10CA	TVS	Vrwm=8.55V, Vbr=9.50..10.50V, Ipp=28.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
10C	-	SMBG10C	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
10C	-	SMBJP6KE10CA	TVS	Vrwm=8.55V, Vbr=9.50..10.50V, Ipp=42.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
10C	-	SMCJ1.5KE10CA	TVS	Vrwm=8.55V, Vbr=9.50..10.50V, Ipp=104.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
10C	-	TVP04A100CA-G	TVS	Vbr=9.50..10.50V, Vrwm=8.6V, Ipp=27.59A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
10C	-	TVP06B10ACA-G	TVS	Vrwm=8.6V, Vbr=9.50..10.50V, Ipp=41.38A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
10CA	-	1SMC10CA	TVS	Vbr=11.1..12.3V, Vrwm=10V, 88.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
10CA	-	MMF10CA	TVS	Vrwm=10V, Vbr=11.1..12.8V, Ipp=11.8A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
10CA	-	P4SMA10CA	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 29.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
10CA	-	P6SMB10CA	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 41.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
10CA	-	P6SMBJ10CA	TVS	Vrwm=10V, Vbr=9..11V, 40A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
10CA	-	SMAJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.3V, 23.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
10CA	-	SMBG10CA	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
10CA	-	SMBJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
10CA	-	SMCJ10CA	TVS	Vrwm=10V, Vbr=11.1..13.6V, 79.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
10CA	-	SMF10CA	TVS	Vbr=11.1..12.3V, Vrwm=10V, Ipp=11.8A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
10CA	-	UMA10CA	TVS	Vrwm=10V, Vbr=11.1..17.0V, 29.4A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
10D	-	RKZ10DKU	Zener diode	9.94..10.44V, Izt=20mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
10D0	-	SZ10D0	Zener diode	200V±10%, Zzt=1900Ω, Izt=4.7mA, 1W	DO-214AC	1d	1a	Eic
10D2	-	SZ10D2	Zener diode	220V±10%, Zzt=1600Ω, Izt=4.0mA, 1W	DO-214AC	1d	1a	Eic
10D4	-	SZ10D4	Zener diode	240V±10%, Zzt=1800Ω, Izt=3.8mA, 1W	DO-214AC	1d	1a	Eic
10D5	-	SZ10D5	Zener diode	250V±10%, Zzt=2000Ω, Izt=3.6mA, 1W	DO-214AC	1d	1a	Eic
10D7	-	SZ10D7	Zener diode	270V±10%, Zzt=2100Ω, Izt=3.3mA, 1W	DO-214AC	1d	1a	Eic
10E0	-	SZ10E0	Zener diode	300V±10%, Zzt=2300Ω, Izt=3.0mA, 1W	DO-214AC	1d	1a	Eic
10G	-	ZD10G-CA2	Zener diode	10V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
10G	-	ZD10G-CB2	Zener diode	10V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
10L	-	ZD10L-CA2	Zener diode	10V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
10L	-	ZD10L-CB2	Zener diode	10V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
10L6	-	KP10L06	Thy-SPD	V Of-St=55V, Ifsm=100A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
10L7	-	KP10L07	Thy-SPD	V Of-St=65V, Ifsm=100A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
10L8	-	KP10L08	Thy-SPD	V Of-St=70V, Ifsm=100A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
10LU06	-	KP10LU06	Thy-SPD	V Of-St=55V, Ifsm=100A(1ms), Ih=100mA, Bidir.	SOD-123	5ba	1j	Shi
10LU08	-	KP10LU08	Thy-SPD	V Of-St=70V, Ifsm=100A(1ms), Ih=100mA, Bidir.	SOD-123	5ba	1j	Shi
10N12	-	KP10N12	Thy-SPD	V Of-St=110V, Ifsm=100A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
10N14	-	KP10N14	Thy-SPD	V Of-St=130V, Ifsm=100A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
10P	-	BZD27C10P	Zener diode	9.50..10.50V, Zzt=4Ω, Izt=50mA, 800mW	SOD-123FL	7d	1a	Pjt
10P	-	MFPZ10	Zener diode	9.5..10.5, Izt=50mA, Zzt=4Ω, 800mW	SOD-123FL	7d	1a	Ttr
10R25	-	KP10R25	Thy-SPD	V Of-St=220V, Ifsm=100A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
10V	-	SMA10	TVS	Vbr=11.1..13.6V, Vrwm=10.0V, 16A, 300W(1ms)	DO-214AC	1d	1a	Mic
10V	-	SMB10	TVS	Vbr=11.1..13.6V, Vrwm=10V, 31.9A, 600W(1ms)	DO-214AA	1d	1a	Mic
10V	-	SMC10	TVS	Vbr=11.1..13.6V, Vrwm=10V, 79.8A, 1500W(1ms)	DO-214AB	1d	1a	Mic
10VA	-	SMA10A	TVS	Vbr=11.1..12.3V, Vrwm=10.0V, 17.6A, 300W(1ms)	DO-214AC	1d	1a	Mic
10VA	-	SMB10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, 35.3A, 600W(1ms)	DO-214AA	1d	1a	Mic
10VA	-	SMC10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, 88.2A, 1500W(1ms)	DO-214AB	1d	1a	Mic
10VB	-	BZT52B10	Zener diode	9.80..10.20V, Izt=5mA, Zzt=20Ω, 500mW	SOD-123FL	7d	1a	Tsc
10VB	-	MMSZ10VBW	Zener diode	9.80..10.20V, Izt=5mA, Zzt=20Ω, 500mW	SOD-123FL	7d	1a	Tac
10VC	-	SMA10C	TVS	Vbr=11.1..13.6V, Vrwm=10.0V, 16A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
10VC	-	SMB10C	TVS	Vbr=11.1..13.6V, Vrwm=10V, 31.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
10VC	-	SMC10C	TVS	Vbr=11.1..13.6V, Vrwm=10V, 79.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
10VCA	-	SMA10CA	TVS	Vbr=11.1..12.3V, Vrwm=10.0V, 17.6A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
10VCA	-	SMB10CA	TVS	Vbr=11.1..12.3V, Vrwm=10V, 35.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
10VCA	-	SMC10CA	TVS	Vbr=11.1..12.3V, Vrwm=10V, 88.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
10VZ	-	BZT52C10	Zener diode	9.50..10.50V, Izt=5mA, Zzt=20Ω, 500mW	SOD-123FL	7d	1a	Tsc
10VZ	-	MMSZ10VCW	Zener diode	9.50..10.50V, Izt=5mA, Zzt=20Ω, 500mW	SOD-123FL	7d	1a	Tac
10VZ	-	TCMMSZ10V	Zener diode	10V±5%, Izt=5mA, Zzt=18Ω, 500mW	SOD-123FL	7d	1a	Tac
10VZ	-	ZGFM0510C-MH	Zener diode	9.50..10.50V, Izt=5mA, Zzt=18Ω, 500mW	SOD-123	5d	1a	Pic
10Z	-	BZD2C100P	Zener diode	100V±5%, Izt=4mA, 1W	DO-219AA	7d	2n	Fag
11	-	BZX384C24	Zener diode	22.8..25.6V, Izt=5.0mA, 200mW	SOD-323	5d	1a	Ttr
11	-	BZY55-C11	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 500mW	0805	70d	2d	Tsc
11	-	CDZ55C11	Zener diode	10.45..11.55V, Zzt=20Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
11	-	CDZ55C11S	Zener diode	10.45..11.55V, Zzt=20Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
11	-	CDZ55C11T	Zener diode	10.45..11.55V, Zzt=20Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
11	-	CTZ55C11	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 500mW	1206	70d	2d	Ctc
11	-	CZRNC55C11-G	Zener diode	10.45..11.55V, Zt=20Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
11	-	CZRSC55C11-G	Zener diode	10.45..11.55V, Zt=20Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
11	-	FDZ24T	Zener diode	22.8..25.6V, Izt=5mA, Zzt=70Ω, 200mW	SOD-323	5d	1a	Fis
11	-	KDZ11EV	Zener diode	10.4..11.6V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
11	-	KDZ11V	Zener diode	10.4..11.6V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
11	-	KDZ11VV	Zener diode	10.40..11.60V, Izt=5mA, Zzt=15Ω, 100mW	VSC	7d	1a	Kec
11	-	LM3Z24VT1G	Zener diode	22.8..25.6V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
11	-	LM5Z24VT1G	Zener diode	22.8..25.6V, Izt=2mA, 200mW	SOD-523	6d	1g	Lrc
11	-	MAZ5110	Zener diode	10.4..11.6V, Zzt=10Ω(5mA), 500mW	MP2	11d	1a	Pan
11	-	MAZ81100H	Zener diode	11.05..11.06V, Zzt=30Ω(5mA), 150mW	SC-76	6d	1a	Pan
11	-	MAZF110	Zener diode	10.40..11.6V, Zzt=30Ω(5mA), 120mW	S-Mini	8d	1a	Pan
11	-	MAZN110	Zener diode	10.40..11.6V, Zzt=30Ω(5mA), 120mW	SSMini2	7d	1a	Pan
11	-	MAZS110	Zener diode	10.4..11.6V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
11	-	MAZY110	Zener diode	9.9..12.1V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
11	-	MM3Z24V	Zener diode	22.8..25.6V, Izt=5mA, Zzt=70Ω, 200mW	SOD-323	5d	1a	Sec

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
11	-	MM5Z24V	Zener diode	24V±5%, Izt=5mA, Zzt=70Ω, 200mW	SOD-523	6d	1u	Wtr
11	-	MMPZ5252BPT	Zener diode	22.80..25.20V, Izt=5mA, Zzt=62Ω, 225mW	SOD-323	5d	1a	Chm
11	-	P4SMA11	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 26.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
11	-	P6SMBJ11	TVS	Vrwm=11V, Vbr=9.9..12.1V, 37A, 600W(1ms)	DO-214AA	1d	1n	Lif
11	-	SMA3C11	Zener diode	11V±5%, Izt=68mA, Zzt<4Ω, 3W	DO-214AC	1d	1a	Exc
11	-	SMBG11	TVS	Vrwm=11V, Vbr=12.2..15.4V, 29.9A, 600W(1ms)	DO-215AA	5d	1a	Msc
11	-	SML4741	Zener diode	11V±5%, Izt=23mA, Zzt=8Ω, 1W	DO-214AC	1d	1k	Vs
11	-	TZD11WS	Zener diode	10.40..11.60V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Ttr
11	-	TZD11WT	Zener diode	10.40..11.60V, Izt=5mA, Zzt=15Ω, 150mW	SOD-523	6d	1a	Ttr
11	-	TZD11WU	Zener diode	10.76..11.22V, Izt=5mA, Zzt=30Ω, 100mW	SOD-723	7d	1a	Ttr
11	-	U1ZB11	Zener diode	9.9..12.1V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos
11	-	USFZ11V	Zener diode	11V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
11	-	ZD24V2	Zener diode	22.8..25.6V, 5mA, Zzt=70Ω, 200mW	SOD-323	5d	1a	Cys
11	ah	HZC11	Zener diode	11V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
11	ay	CRZ11	Zener diode	9.9..12.1V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
11-	-	MAZ81100M	Zener diode	10.73..11.28V, Zzt=30Ω(5mA), 150mW	SC-76	6d	1a	Pan
11-	-	MAZ8110GML	Zener diode	10.73..11.28V, Zzt=30Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
11-	-	MAZS1100M	Zener diode	10.73..11.28V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
11^	-	MAZ81100H	Zener diode	11.05..11.06V, Zzt=30Ω(5mA), 150mW	SC-76	6d	1a	Pan
11^	-	MAZ8110GHL	Zener diode	11.05..11.06V, Zzt=30Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
11^	-	MAZS1100H	Zener diode	11.05..11.6V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
11_	-	MAZ81100L	Zener diode	10.4..10.94V, Zzt=30Ω(5mA), 150mW	SC-76	6d	1a	Pan
11_	-	MAZ8110GLL	Zener diode	10.4..10.94V, Zzt=30Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
11_	-	MAZS1100L	Zener diode	10.4..10.94V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
11•	-	RKZ11B2KG	Zener diode	10.76..11.22V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	2e	Ren
11•	-	RKZ11B2KJ	Zener diode	10.76..11.22V, Izt=5mA, Zzt=30Ω, 150mW	UFP	7d	2e	Ren
11•	-	TZD11YWS	Zener diode	10.76..11.22V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Ttr
11•	-	TZD11YWT	Zener diode	10.76..11.22V, Izt=5mA, Zzt=15Ω, 150mW	SOD-523	6d	1a	Ttr
11•	ai	HZU11B1	Zener diode	10.44..10.88V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
11•	aj	HZU11B2	Zener diode	10.76..11.22V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
11•	ak	HZU11B3	Zener diode	11.10..11.56V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
110	-	1PMT4110	Zener diode	16V±5%, Izt=52.5mA, 1W	DO-216	4d	1a	Msc
110	-	MMF110A	TVS	Vrwm=110V, Vbr=122.0..140.5V, Ipp=1.0A, 200W(1ms)	SOD-123FL	7d	2m	Sst
110	-	P4SMA110	TVS	Vbr=99.0..121V, Vrwm=89.2V, 2.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
110	-	P6SMBJ110	TVS	Vrwm=110V, Vbr=99..121V, 3.8A, 600W(1ms)	DO-214AA	1d	1n	Lif
110	-	SMBG110	TVS	Vrwm=110V, Vbr=122..154.5V, 3.0A, 600W(1ms)	DO-215AA	5d	1a	Msc
110	-	SMD110AGP	Si-diode	SBR, 100V, 1A, Vf<0.8V(1A)	SOD-123S	7d	1a	Chm
110	-	SMF110A	TVS	Vbr=122..135V, Vrwm=110V, Ipp=1.0A, 200W(1ms)	SOD-123FL	7d	1a	Mco
110	-	U1ZB110	Zener diode	99..121V, Izt=3mA, 1W	3-4D1A	1d	2fa	Tos
110A	-	1.5SMC110A	TVS	Vrwm=94V, Vbr=105..116V, Ipp=9.9A, 1500W(1ms)	DO-214AB	1d	1b	Mde
110A	-	1.5SMC110A	TVS	Vrwm=94V, Vbr=105..116V, Ipp=9.9A, 1500W(1ms)	DO-214AB	1d	1k	Vs
110A	-	1.5SMC110A	TVS	Vrwm=94V, Vbr=105..116V, Ipp=9.9A, 1500W(1ms)	DO-214AB	1d	2s	Lif
110A	-	1SMC110A	TVS	Vbr=122..135V, Vrwm=110V, 8.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
110A	-	P4SMA110A	TVS	Vbr=105..116V, Vrwm=94V, 2.8A, 400W(1ms)	DO-214AC	1d	1k	Vs
110A	-	P4SMA110A	TVS	Vbr=105..116V, Vrwm=94V, 2.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
110A	-	P6SMB110A	TVS	Vrwm=110V, Vbr=105..116V, 3.9A, 600W(1ms)	403A	3d	1s	Ons
110A	-	P6SMB110A	TVS	Vrwm=110V, Vbr=105..116V, 3.9A, 600W(1ms)	DO-214AA	1d	1k	Vs
110A	-	P6SMBJ110A	TVS	Vrwm=110V, Vbr=105..116V, 4A, 600W(1ms)	DO-214AA	1d	1n	Lif
110A	-	SMAJ110A	TVS	Vrwm=110V, Vbr=122..135V, 2.3A, 400W(1ms)	DO-214AC	1d	1a	Sus
110A	-	SMAJP4KE110A	TVS	Vrwm=94V, Vbr=105.0..116.0V, Ipp=2.7A, 400W(1ms)	DO-214AC	1d	1a	Mco
110A	-	SMBG110A	TVS	Vrwm=110V, Vbr=122..154.5V, 3.0A, 600W(1ms)	DO-215AA	5d	1a	Msc
110A	-	SMBJ110A	TVS	Vrwm=110V, Vbr=122..154.5V, 3.0A, 600W(1ms)	DO-214AA	1d	1a	Sus
110A	-	SMBJP6KE110A	TVS	Vrwm=94V, Vbr=105.0..116.0V, Ipp=4.0A, 600W(1ms)	DO-214AA	1d	1a	Mco
110A	-	SMCJ1.5KE110A	TVS	Vrwm=94V, Vbr=105.0..116.0V, Ipp=10.0A, 1500W(1ms)	DO-214AB	1d	1a	Mco
110A	-	SMCJ110A	TVS	Vrwm=110V, Vbr=122..140.5V, 7.7A, 1500W(1ms)	DO-214AB	1d	1k	Sus
110A	-	SZP6SMB110A	TVS	Vrwm=110V, Vbr=105..116V, 3.9A, 600W(1ms)	403A	3d	1s	Ons
110A	-	TVP04A111A-G	TVS	Vbr=104.50..115.50V, Vrwm=94V, Ipp=2.63A, 400W(1ms)	DO-214AC	1d	2o	Cmc
110A	-	TVP06B111A-G	TVS	Vrwm=94V, Vbr=104.50..115.50V, Ipp=3.95A, 600W(1ms)	DO-214AA	1d	2o	Cmc
110A	-	UMA110A	TVS	Vrwm=110V, Vbr=122..177V, 2.8A, 500W(1ms)	UltraMite	14d	1v	Msc
110B	-	1SMB3EZ110	Zener diode	110V±5%, Zzt=225Ω, Izt=6.8mA, 3W	DO-214AA	1d	1a	Pjt
110C	-	1.5SMC110CA	TVS	Vrwm=94V, Vbr=105..116V, Ipp=9.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
110C	-	1.5SMC110CA	TVS	Vrwm=94V, Vbr=105..116V, Ipp=9.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
110C	-	1.5SMC110CA	TVS	Vrwm=94V, Vbr=105..116V, Ipp=9.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
110C	-	MMF110CA	TVS	Vrwm=110V, Vbr=122.0..140.5V, Ipp=1.0A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
110C	-	P4SMA110C	TVS	Vbr=99.0..121V, Vrwm=89.2V, 2.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
110C	-	P4SMA110CA	TVS	Vbr=105..116V, Vrwm=94V, 2.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
110C	-	P6SMB110CA	TVS	Vrwm=110V, Vbr=105..116V, 3.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
110C	-	P6SMBJ110C	TVS	Vrwm=110V, Vbr=99..121V, 3.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
110C	-	SMAJP4KE110CA	TVS	Vrwm=94V, Vbr=105.0..116.0V, Ipp=2.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
110C	-	SMBG110C	TVS	Vrwm=110V, Vbr=122..140.5V, 3.4A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
110C	-	SMBJP6KE110CA	TVS	Vrwm=94V, Vbr=105.0..116.0V, Ipp=4.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
110C	-	SMCJ1.5KE110CA	TVS	Vrwm=94V, Vbr=105.0..116.0V, Ipp=10.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
110C	-	SMF110CA	TVS	Vbr=122..135V, Vrwm=110V, Ipp=1.0A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
110C	-	TVP04A111CA-G	TVS	Vbr=104.50..115.50V, Vrwm=94V, Ipp=2.63A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
110C	-	TVP06B111ACA-G	TVS	Vrwm=94V, Vbr=104.50..115.50V, Ipp=3.95A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
110CA	-	1SMC110CA	TVS	Vbr=122..135V, Vrwm=110V, 8.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
110CA	-	P4SMA110CA	TVS	Vbr=105..116V, Vrwm=94V, 2.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
110CA	-	P6SMB110CA	TVS	Vbr=105..116V, Vrwm=94V, 4.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
110CA	-	P6SMBJ110CA	TVS	Vrwm=110V, Vbr=105..116V, 4A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
110CA	-	SMAJ110CA	TVS	Vrwm=110V, Vbr=122..135V, 2.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
110CA	-	SMBG110CA	TVS	Vrwm=110V, Vbr=122..140.5V, 3.4A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
110CA	-	SMBJ110CA	TVS	Vrwm=110V, Vbr=122..140.5V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
110CA	-	SMCJ110CA	TVS	Vrwm=110V, Vbr=122..149V, 7.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
110CA	-	UMA110CA	TVS	Vrwm=110V, Vbr=122..177V, 2.8A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
110V	-	SMA110	TVS	Vbr=122..149V, Vrwm=110.0V, 1.5A, 300W(1ms)	DO-214AC	1d	1a	Mic
110V	-	SMB110	TVS	Vbr=122..149V, Vrwm=110V, 3.1A, 600W(1ms)	DO-214AA	1d	1a	Mic
110V	-	SMC110	TVS	Vbr=122..149V, Vrwm=110V, 7.7A, 1500W(1ms)	DO-214AB	1d	1a	Mic
110VA	-	SMA110A	TVS	Vbr=122..135V, Vrwm=110.0V, 1.7A, 300W(1ms)	DO-214AC	1d	1a	Mic
110VA	-	SMB110A	TVS	Vbr=122..135V, Vrwm=110V, 3.4A, 600W(1ms)	DO-214AA	1d	1a	Mic
110VA	-	SMC110A	TVS	Vbr=122..135V, Vrwm=110V, 8.5A, 1500W(1ms)	DO-214AB	1d	1a	Mic
110VC	-	SMA110C	TVS	Vbr=122..149V, Vrwm=110.0V, 1.5A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
110VC	-	SMB110C	TVS	Vbr=122..149V, Vrwm=110V, 3.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
110VC	-	SMC110C	TVS	Vbr=122..149V, Vrwm=110V, 7.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
110VCA	-	SMA110CA	TVS	Vbr=122..135V, Vrwm=110.0V, 1.7A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
110VCA	-	SMB110CA	TVS	Vbr=122..135V, Vrwm=110V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
110VCA	-	SMC110CA	TVS	Vbr=122..135V, Vrwm=110V, 8.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
110Z	-	1SMA110Z	Zener diode	110V±5%, Izt=2.3mA, Zzt=450Ω, 1W	DO-214AC	1d	1a	Trs
110Z	-	Z1SMA110A	Zener diode	104.50..115.50V, Izt=2.3mA, 1W	SMA	1d	1ab	Ttr
111	-	1PMT4111	Zener diode	17V±5%, Izt=48.1mA, 1W	DO-216	4d	1a	Msc
111	-	HZU11A1L	Zener diode	9.5..9.9V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
112	-	1PMT4112	Zener diode	18V±5%, Izt=45.9mA, 1W	DO-216	4d	1a	Msc
112	-	HZU11A2L	Zener diode	9.7..10.1V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
113	-	1PMT4113	Zener diode	19V±5%, Izt=43.7mA, 1W	DO-216	4d	1a	Msc
113	-	HZU11A3L	Zener diode	9.9..10.3V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
114	-	1PMT4114	Zener diode	20V±5%, Izt=41.6mA, 1W	DO-216	4d	1a	Msc
114	-	HZU11B1L	Zener diode	10.2..10.6V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
115	-	1PMT4115	Zener diode	22V±5%, Izt=37.2mA, 1W	DO-216	4d	1a	Msc
115	-	HZU11B2L	Zener diode	10.4..10.8V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
116	-	1PMT4116	Zener diode	24V±5%, Izt=34.9mA, 1W	DO-216	4d	1a	Msc
116	-	HZU11B3L	Zener diode	10.7..11.1V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
117	-	1PMT4117	Zener diode	25V±5%, Izt=32.8mA, 1W	DO-216	4d	1a	Msc
117	-	HZU11C1L	Zener diode	10.9..11.3V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
118	-	1PMT4118	Zener diode	27V±5%, Izt=30.6mA, 1W	DO-216	4d	1a	Msc
118	-	HZU11C2L	Zener diode	11.1..11.6V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
119	-	1PMT4119	Zener diode	28V±5%, Izt=30.6mA, 1W	DO-216	4d	1a	Msc
119	-	HZU11C3L	Zener diode	11.4..11.9V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
11A	-	1.5SMC11A	TVS	Vrwm=9.4V, Vbr=10.5..11.6V, Ipp=96A, 1500W(1ms)	403	3d	2t	Ons
11A	-	1.5SMC11A	TVS	Vrwm=9.4V, Vbr=10.5..11.6V, Ipp=96A, 1500W(1ms)	DO-214AB	1d	1k	Vs
11A	-	1.5SMC11A	TVS	Vrwm=9.4V, Vbr=10.5..11.6V, Ipp=96A, 1500W(1ms)	DO-214AB	1d	2s	Lif
11A	-	1.5SMC11A	TVS	Vrwm=9.4V, Vbr=10.5..11.6V, Ipp=96A, 1500W(1ms)	DO-214AB	1d	1b	Mde
11A	-	1SMC11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, 82.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
11A	-	MMF11A	TVS	Vrwm=11V, Vbr=12.2..14.0V, Ipp=11A, 200W(1ms)	SOD-123FL	7d	2m	Sst
11A	-	P1100SAA	Thy-SPD	Vdrm=90V, Vs=130V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Vs
11A	-	P4SMA11A	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 27.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
11A	-	P4SMA11A	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 27.0A, 400W(1ms)	DO-214AC	1d	1k	Vs
11A	-	P6SMB11A	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38.5A, 600W(1ms)	DO-214AA	1d	1k	Vs
11A	-	P6SMB11A	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38.5A, 600W(1ms)	403A	3d	1s	Ons
11A	-	P6SMBJ11A	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38A, 600W(1ms)	DO-214AA	1d	1n	Lif
11A	-	RKZ11AKU	Zener diode	10.18..10.71V, Izt=10mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
11A	-	SMAJ11A	TVS	Vrwm=11V, Vbr=12.2..13.5V, 22A, 400W(1ms)	DO-214AC	1d	1j	Sus
11A	-	SMAJP4KE11A	TVS	Vrwm=9.40V, Vbr=10.50..11.60V, Ipp=26.3A, 400W(1ms)	DO-214AC	1d	1a	Mco
11A	-	SMBG11A	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms)	DO-215AA	5d	1a	Msc
11A	-	SMBJ11A	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms)	DO-214AA	1d	1a	Sus
11A	-	SMBJP6KE11A	TVS	Vrwm=9.40V, Vbr=10.50..11.60V, Ipp=39.1A, 600W(1ms)	DO-214AA	1d	1a	Mco
11A	-	SMCJ1.5KE11A	TVS	Vrwm=9.40V, Vbr=10.50..11.60V, Ipp=97.4A, 1500W(1ms)	DO-214AB	1d	1a	Mco
11A	-	SMCJ11A	TVS	Vrwm=11V, Vbr=12.2..14V, 74.6A, 1500W(1ms)	DO-214AB	1d	1k	Sus
11A	-	SMF11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, Ipp=11A, 200W(1ms)	SOD-123FL	7d	1a	Mco
11A	-	SZP6SMB11A	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38.5A, 600W(1ms)	403A	3d	1s	Ons
11A	-	TVP04A110A-G	TVS	Vbr=10.45..11.55V, Vrwm=9.4V, Ipp=25.64A, 400W(1ms)	DO-214AC	1d	2o	Cmc
11A	-	TVP06B11A-G	TVS	Vrwm=9.4V, Vbr=10.45..11.55V, Ipp=38.46A, 600W(1ms)	DO-214AA	1d	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
11A	-	UMA11A	TVS	Vrwm=11V, Vbr=12.2..18.2V, 27.4A, 500W(1ms)	UltraMite	14d	1v	Msc
11B	-	1SMB3EZ11	Zener diode	11V±5%, Zzt=4Ω, Izt=68.0mA, 3W	DO-214AA	1d	1a	Pjt
11B	-	HZF11BP	Zener diode	11V±5%, Iz=20mA, 900mW	LRP	1d	2f	Ren
11B	-	PTZ11B	Zener diode	11V±10%, Izt=20mA, 1W	DO-214AC	1d	1a	Rhm
11B	-	RKZ11BKU	Zener diode	10.50..11.05V, Izt=10mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
11B	-	Z3SMB11B	Zener diode	10.45..11.55V, Izt=68mA, Zzt=4Ω, 3W	DO-214AA	1d	1a	Ttr
11C	-	1.5SMC11CA	TVS	Vrwm=9.4V, Vbr=10.5..11.6V, Ipp=96A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
11C	-	1.5SMC11CA	TVS	Vrwm=9.4V, Vbr=10.5..11.6V, Ipp=96A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
11C	-	1.5SMC11CA	TVS	Vrwm=9.4V, Vbr=10.5..11.6V, Ipp=96A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
11C	-	HZF11CP	Zener diode	11V±10%, Iz=20mA, 900mW	LRP	1d	2f	Ren
11C	-	P4SMA11C	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 26.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
11C	-	P4SMA11CA	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 26.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
11C	-	P6SMB11CA	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
11C	-	P6SMBJ11C	TVS	Vrwm=11V, Vbr=9.9..12.1V, 37A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
11C	-	RKZ11CKU	Zener diode	10.82..11.38V, Izt=10mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
11C	-	SMAJP4KE11CA	TVS	Vrwm=9.40V, Vbr=10.50..11.60V, Ipp=26.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
11C	-	SMBG11C	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
11C	-	SMBJP6KE11CA	TVS	Vrwm=9.40V, Vbr=10.50..11.60V, Ipp=39.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
11C	-	SMCJ1.5KE11CA	TVS	Vrwm=9.40V, Vbr=10.50..11.60V, Ipp=97.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
11C	-	TVP04A110CA-G	TVS	Vbr=10.45..11.55V, Vrwm=9.4V, Ipp=25.64A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
11C	-	TVP06B11ACA-G	TVS	Vrwm=9.4V, Vbr=10.45..11.55V, Ipp=38.46A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
11CA	-	1SMC11CA	TVS	Vbr=12.2..13.5V, Vrwm=11V, 82.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
11CA	-	MMF11CA	TVS	Vrwm=11V, Vbr=12.2..14.0V, Ipp=11A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
11CA	-	P4SMA11CA	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 27.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
11CA	-	P6SMB11CA	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 38.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
11CA	-	P6SMBJ11CA	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
11CA	-	SMAJ11CA	TVS	Vrwm=11V, Vbr=12.2..13.5V, 22A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
11CA	-	SMBG11CA	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
11CA	-	SMBJ11CA	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
11CA	-	SMCJ11CA	TVS	Vrwm=11V, Vbr=12.2..14.9V, 74.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
11CA	-	SMF11CA	TVS	Vbr=12.2..13.5V, Vrwm=11V, Ipp=11A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
11CA	-	UMA11CA	TVS	Vrwm=11V, Vbr=12.2..18.2V, 27.4A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
11G	-	ZD11G-CA2	Zener diode	11V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
11G	-	ZD11G-CB2	Zener diode	11V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
11L	-	ZD11L-CA2	Zener diode	11V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
11L	-	ZD11L-CB2	Zener diode	11V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
11P	-	BZD27C11P	Zener diode	10.45..11.55V, Zzt=7Ω, Izt=50mA, 800mW	SOD-123FL	7d	1a	Pjt
11P	-	MFPZ11	Zener diode	10.45..11.45V, Izt=50mA, Zzt=7Ω, 800mW	SOD-123FL	7d	1a	Ttr
11V	-	SMA11	TVS	Vbr=12.2..14.9V, Vrwm=11.0V, 14.9A, 300W(1ms)	DO-214AC	1d	1a	Mic
11V	-	SMB11	TVS	Vbr=12.2..14.9V, Vrwm=11V, 29.9A, 600W(1ms)	DO-214AA	1d	1a	Mic
11V	-	SMC11	TVS	Vbr=12.2..14.9V, Vrwm=11V, 74.6A, 1500W(1ms)	DO-214AB	1d	1a	Mic
11VA	-	SMA11A	TVS	Vbr=12.2..13.5V, Vrwm=11.0V, 16.5A, 300W(1ms)	DO-214AC	1d	1a	Mic
11VA	-	SMB11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, 33A, 600W(1ms)	DO-214AA	1d	1a	Mic
11VA	-	SMC11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, 82.4A, 1500W(1ms)	DO-214AB	1d	1a	Mic
11VB	-	BZT52B11	Zener diode	10.78..11.22V, Izt=5mA, Zzt=20Ω, 500mW	SOD-123FL	7d	1a	Tsc
11VB	-	MMSZ11VBW	Zener diode	10.78..11.22V, Izt=5mA, Zzt=20Ω, 500mW	SOD-123FL	7d	1a	Tac
11VC	-	SMA11C	TVS	Vbr=12.2..14.9V, Vrwm=11.0V, 14.9A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
11VC	-	SMB11C	TVS	Vbr=12.2..14.9V, Vrwm=11V, 29.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
11VC	-	SMC11C	TVS	Vbr=12.2..14.9V, Vrwm=11V, 74.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
11VCA	-	SMA11CA	TVS	Vbr=12.2..13.5V, Vrwm=11.0V, 16.5A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
11VCA	-	SMB11CA	TVS	Vbr=12.2..13.5V, Vrwm=11V, 33A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
11VCA	-	SMC11CA	TVS	Vbr=12.2..13.5V, Vrwm=11V, 82.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
11VZ	-	BZT52C11	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 500mW	SOD-123FL	7d	1a	Tsc
11VZ	-	MMSZ11VCW	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 500mW	SOD-123FL	7d	1a	Tac
11VZ	-	TCMMSZ11V	Zener diode	11V±5%, Izt=5mA, Zzt=18Ω, 500mW	SOD-123FL	7d	1a	Tac
11VZ	-	ZGFM0511C-MH	Zener diode	10.45..11.55V, Izt=5mA, Zzt=18Ω, 500mW	SOD-123	5d	1a	Pic
12	-	BZX384C27	Zener diode	25.1..28.9V, Izt=2.0mA, 200mW	SOD-323	5d	1a	Ttr
12	-	BZY55-C12	Zener diode	11.40..12.60V, Izt=5mA, Zzt=20Ω, 500mW	0805	70d	2d	Tsc
12	-	CDZ55C12	Zener diode	11.40..12.60V, Zzt=20Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
12	-	CDZ55C12S	Zener diode	11.40..12.60V, Zzt=20Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
12	-	CDZ55C12T	Zener diode	11.40..12.60V, Zzt=20Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
12	-	CMZ12	Zener diode	12V±5%, Izt=10mA, 2W	M-FLAT	7d	1a	Tos
12	-	CTZ55C12	Zener diode	11.40..12.60V, Izt=5mA, Zzt=20Ω, 500mW	1206	70d	2d	Ctc
12	-	CZRNC55C12-G	Zener diode	11.40..12.60V, Zt=20Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
12	-	CZRSC55C12-G	Zener diode	11.40..12.60V, Zt=20Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
12	-	FDZ2.2VT	Zener diode	2.220..2.410V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Fis
12	-	FDZ27T	Zener diode	25.1..28.9V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Fis
12	-	FM120-M	Si-diode	SBR, 20V, 1.0A, Vf<0.50V(1A	SOD-123L	10d	1a	Tfr
12	-	GDZ2V2B-V	Zener diode	2.22..2.41V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	2m	Vs
12	-	HZU12G	Zener diode	11.42..12.6V, Izt=5mA, 200mW	SOD-323	5d	1a	Ren

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
12	-	KDZ12EV	Zener diode	11.4..12.6V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
12	-	KDZ12V	Zener diode	11.4..12.6V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
12	-	KDZ12VV	Zener diode	11.40..12.60V, Izt=5mA, Zzt=15Ω, 100mW	VSC	7d	1a	Kec
12	-	LBZT52B2V2T1G	Zener diode	2.22..2.41V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
12	-	LM3Z27VT1G	Zener diode	25.1..28.9V, Izt=2mA, 200mW	SOD-323	5d	1u	Lrc
12	-	LM5Z27VT1G	Zener diode	25.1..28.9V, Izt=2mA, 200mW	SOD-523	6d	1g	Lrc
12	-	LUDZS2.2BT1G	Zener diode	2.22..2.41V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
12	-	MAZ5120	Zener diode	11.4..12.7V, Zzt=10Ω(5mA), 500mW	MP2	11d	1a	Pan
12	-	MAZ81200H	Zener diode	12.06..12.68V, Zzt=30Ω(5mA), 150mW	SC-76	6d	1a	Pan
12	-	MAZF120	Zener diode	11.4..12.7V, Zzt=30Ω(5mA), 120mW	S-Mini	8d	1a	Pan
12	-	MAZN120	Zener diode	11.4..12.7V, Zzt=30Ω(5mA), 120mW	SSMini2	7d	1a	Pan
12	-	MAZS120	Zener diode	11.4..12.7V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
12	-	MAZY120	Zener diode	10.8..13.2V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
12	-	MM3Z27V	Zener diode	25.1..28.9V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Sec
12	-	MM5Z27V	Zener diode	25.1..28.9V, 2mA, Zzt=80Ω, 100mW	SOD-523	6d	1a	Wtr
12	-	MMPZ5254BPT	Zener diode	25.65..28.35V, Izt=5mA, Zzt=70Ω, 225mW	SOD-323	5d	1a	Chm
12	-	P4SMA12	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 24.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
12	-	P6SMBJ12	TVS	Vrwm=12V, Vbr=10.8..13.2V, 35A, 600W(1ms)	DO-214AA	1d	1n	Lif
12	-	SMA3C12	Zener diode	12V±5%, Izt=63mA, Zzt<4.5Ω, 3W	DO-214AC	1d	1a	Exc
12	-	SMBG12	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms)	DO-215AA	5d	1a	Msc
12	-	SML4742	Zener diode	12V±5%, Izt=21mA, Zzt=9Ω, 1W	DO-214AC	1d	1k	Vs
12	-	TZD12WS	Zener diode	11.40..12.60V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Ttr
12	-	TZD12WT	Zener diode	11.40..12.60V, Izt=5mA, Zzt=15Ω, 150mW	SOD-523	6d	1a	Ttr
12	-	TZD12WU	Zener diode	11.74..12.24V, Izt=5mA, Zzt=30Ω, 100mW	SOD-723	7d	1a	Ttr
12	-	U1ZB12	Zener diode	10.8..13.2V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos
12	-	UDZS2.2B	Zener diode	2.22..2.41V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Wtr
12	-	USFZ12V	Zener diode	12V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
12	-	ZD27V0	Zener diode	25.1..28.9V, 2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Cys
12	ah	HZC12	Zener diode	12V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
12	ay	CRZ12	Zener diode	10.8..13.2V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
12-	-	MAZ81200M	Zener diode	11.73..12.33V, Zzt=30Ω(5mA), 150mW	SC-76	6d	1a	Pan
12-	-	MAZ8120GML	Zener diode	11.73..12.33V, Zzt=30Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
12-	-	MAZS1200M	Zener diode	11.73..12.33V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
12/12	af	SD12C	TVS	Vrwm=12.0V, Vbr=13.3..19V, Ipp=15A, 350W(1ms), Bidir.	SOD-323	5ba	1e	Smt
12^	-	MAZ81200H	Zener diode	12.06..12.68V, Zzt=30Ω(5mA), 150mW	SC-76	6d	1a	Pan
12^	-	MAZ8120GHL	Zener diode	12.06..12.68V, Zzt=30Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
12^	-	MAZS1200H	Zener diode	12.06..12.68V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
12_	-	MAZ81200L	Zener diode	11.4..11.96V, Zzt=30Ω(5mA), 150mW	SC-76	6d	1a	Pan
12_	-	MAZ8120GLL	Zener diode	11.4..11.96V, Zzt=30Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
12_	-	MAZS1200L	Zener diode	11.4..11.96V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
12•	-	RKZ12B2KG	Zener diode	11.74..12.24V, Izt=5mA, Zzt=35Ω, 200mW	URP	5d	2e	Ren
12•	-	RKZ12B2KJ	Zener diode	11.74..12.24V, Izt=5mA, Zzt=35Ω, 150mW	UFP	7d	2e	Ren
12•	-	TZD12YWS	Zener diode	11.74..12.24V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Ttr
12•	-	TZD12YWT	Zener diode	11.74..12.24V, Izt=5mA, Zzt=15Ω, 150mW	SOD-523	6d	1a	Ttr
12•	ai	HZU12B1	Zener diode	11.42..11.90V, Izt=5mA, Zzt=35Ω, 200mW	URP	5d	1a	Ren
12•	aj	HZU12B2	Zener diode	11.74..12.24V, Izt=5mA, Zzt=35Ω, 200mW	URP	5d	1a	Ren
12•	ak	HZU12B3	Zener diode	12.08..12.60V, Izt=5mA, Zzt=35Ω, 200mW	URP	5d	1a	Ren
120	-	1PMT4120	Zener diode	30V±5%, Izt=28.4mA, 1W	DO-216	4d	1a	Msc
120	-	MMF120A	TVS	Vrwm=120V, Vbr=133.0..153.0V, Ipp=0.9A, 200W(1ms)	SOD-123FL	7d	2m	Sst
120	-	P4SMA120	TVS	Vbr=108..132V, Vrwm=97.2V, 2.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
120	-	P6SMBJ120	TVS	Vrwm=120V, Vbr=108..132V, 3.5A, 600W(1ms)	DO-214AA	1d	1n	Lif
120	-	SMBG120	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms)	DO-215AA	5d	1a	Msc
120	-	SMF120A	TVS	Vbr=133..147V, Vrwm=120V, Ipp=0.9A, 200W(1ms)	SOD-123FL	7d	1a	Mco
120	-	STPS120M	Si-diode	SBR, 20V, 1A, Vf<0.55V(1A)	DO-216AA	4d	1a	Ste
120A	-	1.5SMC120A	TVS	Vrwm=102V, Vbr=114..126V, Ipp=9.1A, 1500W(1ms)	DO-214AB	1d	1b	Mde
120A	-	1.5SMC120A	TVS	Vrwm=102V, Vbr=114..126V, Ipp=9.1A, 1500W(1ms)	DO-214AB	1d	1k	Vs
120A	-	1.5SMC120A	TVS	Vrwm=102V, Vbr=114..126V, Ipp=9.1A, 1500W(1ms)	DO-214AB	1d	2s	Lif
120A	-	1SMC120A	TVS	Vbr=133..147V, Vrwm=120V, 7.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
120A	-	P4SMA120A	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
120A	-	P4SMA120A	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 400W(1ms)	DO-214AC	1d	1k	Vs
120A	-	P6SMB120A	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
120A	-	P6SMB120A	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms)	403A	3d	1s	Ons
120A	-	P6SMBJ120A	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms)	DO-214AA	1d	1n	Lif
120A	-	SMAJ120A	TVS	Vrwm=120V, Vbr=133..147V, 2.0A, 400W(1ms)	DO-214AC	1d	1a	Sus
120A	-	SMAJP4KE120A	TVS	Vrwm=102.0V, Vbr=114.0..126.0V, Ipp=2.5A, 400W(1ms)	DO-214AC	1d	1a	Mco
120A	-	SMBG120A	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms)	DO-215AA	5d	1a	Msc
120A	-	SMBJ120A	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms)	DO-214AA	1d	1a	Sus
120A	-	SMBJP6KE120A	TVS	Vrwm=102.0V, Vbr=114.0..126.0V, Ipp=3.7A, 600W(1ms)	DO-214AA	1d	1a	Mco
120A	-	SMCJ1.5KE120A	TVS	Vrwm=102.0V, Vbr=114.0..126.0V, Ipp=9.2A, 1500W(1ms)	DO-214AB	1d	1a	Mco
120A	-	SMCJ120A	TVS	Vrwm=120V, Vbr=133..153V, 7A, 1500W(1ms)	DO-214AB	1d	1k	Sus

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
120A	-	SZP6SMB120A	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms)	403A	3d	1s	Ons
120A	-	TSP120SA	Thy-SPD	V Of-St=120V, 50A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
120A	-	TVP04A121A-G	TVS	Vbr=114.0..126.0V, Vrwm=102.0V, Ipp=2.42A, 400W(1ms)	DO-214AC	1d	2o	Cmc
120A	-	TVP06B121A-G	TVS	Vrwm=102.0V, Vbr=114.0..126.0V, Ipp=3.64A, 600W(1ms)	DO-214AA	1d	2o	Cmc
120A	-	UMA120A	TVS	Vrwm=120V, Vbr=133..193V, 2.6A, 500W(1ms)	UltraMite	14d	1v	Msc
120B	-	1SMB3EZ120	Zener diode	120V±5%, Zzt=300Ω, Izt=6.3mA, 3W	DO-214AA	1d	1a	Pjt
120B	-	TSP120SB	Thy-SPD	V Of-St=120V, 80A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
120C	-	1.5SMC120CA	TVS	Vrwm=97.2V, Vbr=108..132V, Ipp=8.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
120C	-	1.5SMC120CA	TVS	Vrwm=97.2V, Vbr=108..132V, Ipp=8.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
120C	-	1.5SMC120CA	TVS	Vrwm=97.2V, Vbr=108..132V, Ipp=8.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
120C	-	MMF120CA	TVS	Vrwm=120V, Vbr=133.0..153.0V, Ipp=0.9A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
120C	-	P4SMA120C	TVS	Vbr=108..132V, Vrwm=97.2V, 2.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
120C	-	P4SMA120CA	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
120C	-	P6SMB120CA	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
120C	-	P6SMBJ120C	TVS	Vrwm=120V, Vbr=108..132V, 3.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
120C	-	SMAJP4KE120CA	TVS	Vrwm=102.0V, Vbr=114.0..126.0V, Ipp=2.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
120C	-	SMBG120C	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
120C	-	SMBJP6KE120CA	TVS	Vrwm=102.0V, Vbr=114.0..126.0V, Ipp=3.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
120C	-	SMCJ1.5KE120CA	TVS	Vrwm=102.0V, Vbr=114.0..126.0V, Ipp=9.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
120C	-	SMF120CA	TVS	Vbr=133..147V, Vrwm=120V, Ipp=0.9A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
120C	-	TSP120SC	Thy-SPD	V Of-St=120V, 100A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
120C	-	TVP04A121CA-G	TVS	Vbr=114.0..126.0V, Vrwm=102.0V, Ipp=2.42A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
120C	-	TVP06B121ACA-G	TVS	Vrwm=102.0V, Vbr=114.0..126.0V, Ipp=3.64A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
120CA	-	1SMC120CA	TVS	Vbr=133..147V, Vrwm=120V, 7.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
120CA	-	P4SMA120CA	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
120CA	-	P6SMB120CA	TVS	Vbr=114..126V, Vrwm=102V, 3.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
120CA	-	P6SMBJ120CA	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
120CA	-	SMAJ120CA	TVS	Vrwm=120V, Vbr=133..147V, 2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
120CA	-	SMBG120CA	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
120CA	-	SMBJ120CA	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
120CA	-	SMCJ120CA	TVS	Vrwm=120V, Vbr=133..163V, 7.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
120CA	-	UMA120CA	TVS	Vrwm=120V, Vbr=133..193V, 2.6A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
120V	-	SMA120	TVS	Vbr=133..163V, Vrwm=120.0V, 1.4A, 300W(1ms)	DO-214AC	1d	1a	Mic
120V	-	SMB120	TVS	Vbr=133..163V, Vrwm=120V, 2.8A, 600W(1ms)	DO-214AA	1d	1a	Mic
120V	-	SMC120	TVS	Vbr=133..163V, Vrwm=120V, 7A, 1500W(1ms)	DO-214AB	1d	1a	Mic
120VA	-	SMA120A	TVS	Vbr=133..157V, Vrwm=120.0V, 1.6A, 300W(1ms)	DO-214AC	1d	1a	Mic
120VA	-	SMB120A	TVS	Vbr=133..157V, Vrwm=120V, 3.1A, 600W(1ms)	DO-214AA	1d	1a	Mic
120VA	-	SMC120A	TVS	Vbr=133..147V, Vrwm=120V, 7.8A, 1500W(1ms)	DO-214AB	1d	1a	Mic
120VC	-	SMA120C	TVS	Vbr=133..163V, Vrwm=120.0V, 1.4A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
120VC	-	SMB120C	TVS	Vbr=133..163V, Vrwm=120V, 2.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
120VC	-	SMC120C	TVS	Vbr=133..163V, Vrwm=120V, 7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
120VCA	-	SMA120CA	TVS	Vbr=133..157V, Vrwm=120.0V, 1.6A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
120VCA	-	SMB120CA	TVS	Vbr=133..157V, Vrwm=120V, 3.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
120VCA	-	SMC120CA	TVS	Vbr=133..147V, Vrwm=120V, 7.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
120Z	-	1SMA120Z	Zener diode	120V±5%, Izt=2.05mA, Zzt=550Ω, 1W	DO-214AC	1d	1a	Trs
120Z	-	Z1SMA120A	Zener diode	114.0..126.0V, Izt=2mA, 1W	SMA	1d	1ab	Ttr
121	-	1PMT4121	Zener diode	33V±5%, Izt=26.2mA, 1W	DO-216	4d	1a	Msc
121	-	HZU12A1L	Zener diode	11.6..12.1V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
122	-	1PMT4122	Zener diode	36V±5%, Izt=24.0mA, 1W	DO-216	4d	1a	Msc
122	-	HZU12A2L	Zener diode	11.9..12.4V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
123	-	1PMT4123	Zener diode	39V±5%, Izt=21.4mA, 1W	DO-216	4d	1a	Msc
123	-	HZU12A3L	Zener diode	12.2..12.7V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
124	-	1PMT4124	Zener diode	43V±5%, Izt=19.5mA, 1W	DO-216	4d	1a	Msc
124	-	HZU12B1L	Zener diode	12.4..12.9V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
125	-	1PMT4125	Zener diode	47V±5%, Izt=17.7mA, 1W	DO-216	4d	1a	Msc
125	-	HZU12B2L	Zener diode	12.6..13.1V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
126	-	1PMT4126	Zener diode	51V±5%, Izt=16.4mA, 1W	DO-216	4d	1a	Msc
126	-	HZU12B3L	Zener diode	12.9..13.4V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
127	-	1PMT4127	Zener diode	56V±5%, Izt=14.7mA, 1W	DO-216	4d	1a	Msc
127	-	HZU12C1L	Zener diode	13.2..13.7V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
127Z	-	BYD127	Si-diode	U-fast Rectifier, 200V, 1A, Vf<0.93V(1A), 30ns	1206	14d	1v	Zow
128	-	1PMT4128	Zener diode	60V±5%, Izt=13.9mA, 1W	DO-216	4d	1a	Msc
128	-	HZU12C2L	Zener diode	13.5..14.0V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
129	-	1PMT4129	Zener diode	62V±5%, Izt=13.3mA, 1W	DO-216	4d	1a	Msc
129	-	HZU12C3L	Zener diode	13.8..14.3V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
12A	-	1.5SMC12A	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, Ipp=90A, 1500W(1ms)	DO-214AB	1d	2s	Lif
12A	-	1.5SMC12A	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, Ipp=90A, 1500W(1ms)	DO-214AB	1d	1k	Vs
12A	-	1.5SMC12A	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, Ipp=90A, 1500W(1ms)	DO-214AB	1d	1b	Mde
12A	-	1.5SMC12A	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, Ipp=90A, 1500W(1ms)	403	3d	2t	Ons
12A	-	1SMC12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, 75.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
12A	-	MMF12A	TVS	Vrwm=12V, Vbr=13.3..15.3V, Ipp=10.1A, 200W(1ms)	SOD-123FL	7d	2m	Sst
12A	-	P4SMA12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25.0A, 400W(1ms)	DO-214AC	1d	1k	Vs
12A	-	P4SMA12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
12A	-	P6SMB12A	TVS	Vrwm=12V, Vbr=11.4..12.6V, 35.9A, 600W(1ms)	403A	3d	1s	Ons
12A	-	P6SMB12A	TVS	Vrwm=12V, Vbr=11.4..12.6V, 35.9A, 600W(1ms)	DO-214AA	1d	1k	Vs
12A	-	P6SMBJ12A	TVS	Vrwm=12V, Vbr=11.4..12.6V, 36A, 600W(1ms)	DO-214AA	1d	1n	Lif
12A	-	RKZ12AKU	Zener diode	11.13..11.71V, Izt=10mA, Zzt=35Ω, 500mW	TURP-FM	7d	1a	Ren
12A	-	SMAJ12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, 20.1A, 400W(1ms)	DO-214AC	1d	1a	Sus
12A	-	SMAJP4KE12A	TVS	Vrwm=10.20V, Vbr=11.40..12.60V, Ipp=24.6A, 400W(1ms)	DO-214AC	1d	1a	Mco
12A	-	SMBG12A	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms)	DO-215AA	5d	1a	Msc
12A	-	SMBJ12A	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms)	DO-214AA	1d	1a	Sus
12A	-	SMBJP6KE12A	TVS	Vrwm=10.20V, Vbr=11.40..12.60V, Ipp=36.5A, 600W(1ms)	DO-214AA	1d	1a	Mco
12A	-	SMCJ1.5KE12A	TVS	Vrwm=10.20V, Vbr=11.40..12.60V, Ipp=91.0A, 1500W(1ms)	DO-214AB	1d	1a	Mco
12A	-	SMCJ12A	TVS	Vrwm=12V, Vbr=13.3..15.3V, 68.2A, 1500W(1ms)	DO-214AB	1d	1k	Sus
12A	-	SMD12ALPT	Si-diode	SBR, 20V, 1A, Vf<0.38V(1A)	SOD-123S	8d	1a	Chm
12A	-	SMF12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, Ipp=10.1A, 200W(1ms)	SOD-123FL	7d	1a	Mco
12A	-	SZP6SMB12A	TVS	Vrwm=12V, Vbr=11.4..12.6V, 35.9A, 600W(1ms)	403A	3d	1s	Ons
12A	-	TVP04A120A-G	TVS	Vbr=11.40..12.60V, Vrwm=10.2V, Ipp=23.95A, 400W(1ms)	DO-214AC	1d	2o	Cmc
12A	-	TVP06B12A-G	TVS	Vrwm=10.2V, Vbr=11.40..12.60V, Ipp=35.93A, 600W(1ms)	DO-214AA	1d	2o	Cmc
12A	-	UMA12A	TVS	Vrwm=12V, Vbr=13.3..19.9V, 25.1A, 500W(1ms)	UltraMite	14d	1v	Msc
12AP	-	15TPSMC12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 91A, 1500W(1ms)	DO-214AB	1d	1p	Lif
12AP	-	4TPSMA12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 24.6A, 400W(1ms)	DO-214AC	1d	1p	Lif
12AP	-	6TPSMB12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 36.5A, 600W(1ms)	DO-214AA	1d	1p	Lif
12B	-	1SMB3EZ12	Zener diode	12V±5%, Zzt=5Ω, Izt=63.0mA, 3W	DO-214AA	1d	1a	Pjt
12B	-	HZF12BP	Zener diode	12V±5%, Iz=20mA, 900mW	LRP	1d	2f	Ren
12B	-	PTZ12B	Zener diode	12V±10%, Izt=20mA, 1W	DO-214AC	1d	1a	Rhm
12B	-	RKZ12BKU	Zener diode	11.44..12.03V, Izt=10mA, Zzt=35Ω, 500mW	TURP-FM	7d	1a	Ren
12B	-	Z3SMB12B	Zener diode	11.40..12.60V, Izt=63mA, Zzt=5Ω, 3W	DO-214AA	1d	1a	Ttr
12C	-	1.5SMC12CA	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, Ipp=90A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
12C	-	1.5SMC12CA	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, Ipp=90A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
12C	-	1.5SMC12CA	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, Ipp=90A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
12C	-	HZF12CP	Zener diode	12V±10%, Iz=20mA, 900mW	LRP	1d	2f	Ren
12C	-	P4SMA12C	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 24.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
12C	-	P4SMA12CA	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
12C	-	P6SMB12CA	TVS	Vrwm=12V, Vbr=11.4..12.6V, 35.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
12C	-	P6SMBJ12C	TVS	Vrwm=12V, Vbr=10.8..13.2V, 35A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
12C	-	RKZ12CKU	Zener diode	11.74..12.35V, Izt=10mA, Zzt=35Ω, 500mW	TURP-FM	7d	1a	Ren
12C	-	SMAJP4KE12CA	TVS	Vrwm=10.20V, Vbr=11.40..12.60V, Ipp=24.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
12C	-	SMBG12C	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
12C	-	SMBJP6KE12CA	TVS	Vrwm=10.20V, Vbr=11.40..12.60V, Ipp=36.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
12C	-	SMCJ1.5KE12CA	TVS	Vrwm=10.20V, Vbr=11.40..12.60V, Ipp=91.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
12C	-	TVP04A120CA-G	TVS	Vbr=11.40..12.60V, Vrwm=10.2V, Ipp=23.95A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
12C	-	TVP06B12ACA-G	TVS	Vrwm=10.2V, Vbr=11.40..12.60V, Ipp=35.93A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
12CA	-	1SMC12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, 75.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
12CA	-	MMF12CA	TVS	Vrwm=12V, Vbr=13.3..15.3V, Ipp=10.1A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
12CA	-	P4SMA12CA	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
12CA	-	P6SMB12CA	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 36.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
12CA	-	P6SMBJ12CA	TVS	Vrwm=12V, Vbr=11.4..12.6V, 36A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
12CA	-	SMAJ12CA	TVS	Vrwm=12V, Vbr=13.3..14.7V, 20.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
12CA	-	SMBG12CA	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
12CA	-	SMBJ12CA	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
12CA	-	SMCJ12CA	TVS	Vrwm=12V, Vbr=13.3..15.3V, 68.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
12CA	-	SMF12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, Ipp=10.1A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
12CA	-	UMA12CA	TVS	Vrwm=12V, Vbr=13.3..19.9V, 25.1A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
12CP	-	15TPSMC12CA	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 91A, 1500W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
12CP	-	4TPSMA12CA	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 24.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1p	Lif
12CP	-	6TPSMB12CA	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 36.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
12G	-	ZD12G-CA2	Zener diode	12V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
12G	-	ZD12G-CB2	Zener diode	12V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
12L	-	MSS1P2L	Si-diode	SBR, 20V, 1A, Vf<0.55V(1A)	MicroSMP	8d	1k	Vs
12L	-	MSS1P3L	Si-diode	SBR, 30V, 1A, Vf<0.55V(1A)	MicroSMP	8d	1k	Vs
12L	-	ZD12L-CA2	Zener diode	12V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
12L	-	ZD12L-CB2	Zener diode	12V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
12LL	-	SSM12LLPT	Si-diode	SBR, 20V, 1A, Vf<0.27V(1A)	DO-214AC	1d	1a	Chm
12P	-	BZD27C12P	Zener diode	11.40..12.60V, Zzt=7Ω, Izt=50mA, 800mW	SOD-123FL	7d	1a	Pjt
12P	-	MFPZ12	Zener diode	11.4..12.6V, Izt=50mA, Zzt=7Ω, 800mW	SOD-123FL	7d	1a	Ttr
12U	-	MSS1P2U	Si-diode	SBR, 20V, 1A, Vf<0.40V(1A)	MicroSMP	8d	1k	Vs
12U	-	MSS1P3U	Si-diode	SBR, 30V, 1A, Vf<0.40V(1A)	MicroSMP	8d	1k	Vs
12V	-	SMA12	TVS	Vbr=13.3..16.3V, Vrwm=12V, 13.6A, 300W(1ms)	DO-214AC	1d	1a	Mic
12V	-	SMB12	TVS	Vbr=13.3..16.3V, Vrwm=12V, 27.3A, 600W(1ms)	DO-214AA	1d	1a	Mic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
12V	-	SMC12	TVS	Vbr=13.3..16.3V, Vrwm=12V, 68.2A, 1500W(1ms)	DO-214AB	1d	1a	Mic
12VA	-	SMA12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, 15.1A, 300W(1ms)	DO-214AC	1d	1a	Mic
12VA	-	SMB12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, 30.2A, 600W(1ms)	DO-214AA	1d	1a	Mic
12VA	-	SMC12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, 75.4A, 1500W(1ms)	DO-214AB	1d	1a	Mic
12VB	-	BZT52B12	Zener diode	11.76..12.24V, Izt=5mA, Zzt=25Ω, 500mW	SOD-123FL	7d	1a	Tsc
12VB	-	MMSZ12VBW	Zener diode	11.76..12.24V, Izt=5mA, Zzt=25Ω, 500mW	SOD-123FL	7d	1a	Tac
12VC	-	SMA12C	TVS	Vbr=13.3..16.3V, Vrwm=12V, 13.6A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
12VC	-	SMB12C	TVS	Vbr=13.3..16.3V, Vrwm=12V, 27.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
12VC	-	SMC12C	TVS	Vbr=13.3..16.3V, Vrwm=12V, 68.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
12VCA	-	SMA12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, 15.1A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
12VCA	-	SMB12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, 30.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
12VCA	-	SMC12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, 75.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
12VZ	-	BZT52C12	Zener diode	11.40..12.60V, Izt=5mA, Zzt=25Ω, 500mW	SOD-123FL	7d	1a	Tsc
12VZ	-	MMSZ12VCW	Zener diode	11.40..12.60V, Izt=5mA, Zzt=25Ω, 500mW	SOD-123FL	7d	1a	Tac
12VZ	-	TCMMSZ12V	Zener diode	12V±5%, Izt=5mA, Zzt=23Ω, 500mW	SOD-123FL	7d	1a	Tac
12VZ	-	ZGFM0512C-MH	Zener diode	11.40..12.60V, Izt=5mA, Zzt=23Ω, 500mW	SOD-123	5d	1a	Pic
12W	-	SD12	TVS	Vrwm=12.0V, Vbr=13.3..19V, Ipp=15A, 500W(1ms)	SOD-323	5d	1a	Ldt
12Z	-	BZD2C120P	Zener diode	120V±5%, Izt=4mA, 1W	DO-219AA	7d	2n	Fag
13	-	BZY55-C13	Zener diode	12.35..13.65V, Izt=5mA, Zzt=26Ω, 500mW	0805	70d	2d	Tsc
13	-	CDZ55C13	Zener diode	12.35..13.65V, Zzt=26Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
13	-	CDZ55C13S	Zener diode	12.35..13.65V, Zzt=26Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
13	-	CDZ55C13T	Zener diode	12.35..13.65V, Zzt=26Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
13	-	CMZ13	Zener diode	13V±5%, Izt=10mA, 2W	M-FLAT	7d	1a	Tos
13	-	CTZ55C13	Zener diode	12.35..13.65V, Izt=5mA, Zzt=26Ω, 500mW	1206	70d	2d	Ctc
13	-	CZRNC55C13-G	Zener diode	12.35..13.65V, Zt=26Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
13	-	CZRSC55C13-G	Zener diode	12.35..13.65V, Zt=26Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
13	-	FM130-M	Si-diode	SBR, 30V, 1.0A, Vf<0.50V(1A)	SOD-123L	10d	1a	Tfr
13	-	HZU13G	Zener diode	12.47..13.96V, Izt=5mA, 200mW	SOD-323	5d	1a	Ren
13	-	KDZ13EV	Zener diode	12.4..14.1V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
13	-	KDZ13V	Zener diode	12.4..14.1V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
13	-	KDZ13VV	Zener diode	12.40..14.10V, Izt=5mA, Zzt=15Ω, 100mW	VSC	7d	1a	Kec
13	-	MAZ5130	Zener diode	12.4..14.1V, Zzt=10Ω(5mA), 500mW	MP2	11d	1a	Pan
13	-	MAZ81300H	Zener diode	13.25..14.08V, Zzt=35Ω(5mA), 150mW	SC-76	6d	1a	Pan
13	-	MAZS130	Zener diode	12.4..14.1V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
13	-	MAZY130	Zener diode	11.7..14.3V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
13	-	MSS1P3	Si-diode	SBR, 30V, 1A, Vf<0.55V(1A)	MicroSMP	8d	1k	Vs
13	-	MSS2P2	Si-diode	SBR, 20V, 2A, Vf<0.60V(2A)	MicroSMP	8d	1k	Vs
13	-	P4SMA13	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 22.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
13	-	P6SMBJ13	TVS	Vrwm=13V, Vbr=11.7..14.3V, 32A, 600W(1ms)	DO-214AA	1d	1n	Lif
13	-	SMA3C13	Zener diode	13V±5%, Izt=58mA, Zzt<4.5Ω, 3W	DO-214AC	1d	1a	Exc
13	-	SMBG13	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms)	DO-215AA	5d	1a	Msc
13	-	SML4743	Zener diode	13V±5%, Izt=19mA, Zzt=10Ω, 1W	DO-214AC	1d	1k	Vs
13	-	SS1P3	Si-diode	SBR, 30V, 1A, Vf<0.53V(1A)	DO-220AA	8d	1k	Vs
13	-	TZD13WS	Zener diode	12.40..14.10V, Izt=5mA, Zzt=15 Ω, 200mW	SOD-323	5d	1a	Ttr
13	-	TZD13WT	Zener diode	12.40..14.10V, Izt=5mA, Zzt=15Ω, 150mW	SOD-523	6d	1a	Ttr
13	-	TZD13WU	Zener diode	12.91..13.49V, Izt=5mA, Zzt=37Ω, 100mW	SOD-723	7d	1a	Ttr
13	-	U1ZB13	Zener diode	11.7..14.3V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos
13	-	USFZ13V	Zener diode	13V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
13	ah	HZC13	Zener diode	13V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
13	ay	CRZ13	Zener diode	11.7..14.3V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
13-	-	MAZ81300M	Zener diode	12.73..13.4V, Zzt=35Ω(5mA), 150mW	SC-76	6d	1a	Pan
13-	-	MAZ8130GML	Zener diode	12.73..13.4V, Zzt=35Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
13-	-	MAZS1300M	Zener diode	12.73..13.4V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
13^	-	MAZ81300H	Zener diode	13.25..14.08V, Zzt=35Ω(5mA), 150mW	SC-76	6d	1a	Pan
13^	-	MAZ8130GHL	Zener diode	13.25..14.08V, Zzt=35Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
13^	-	MAZS1300H	Zener diode	13.25..14.08V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
13_	-	MAZ81300L	Zener diode	12.4..12.99V, Zzt=35Ω(5mA), 150mW	SC-76	6d	1a	Pan
13_	-	MAZ8130GLL	Zener diode	12.4..12.99V, Zzt=35Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
13_	-	MAZS1300L	Zener diode	12.4..12.99V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
13•	-	RKZ13B2KG	Zener diode	12.91..13.49V, Izt=5mA, Zzt=35Ω, 200mW	URP	5d	2e	Ren
13•	-	RKZ13B2KJ	Zener diode	12.91..13.49V, Izt=5mA, Zzt=35Ω, 150mW	UFP	7d	2e	Ren
13•	-	TZD13YWS	Zener diode	12.91..13.49V, Izt=5mA, Zzt=15 Ω, 200mW	SOD-323	5d	1a	Ttr
13•	-	TZD13YWT	Zener diode	12.91..13.49V, Izt=5mA, Zzt=15Ω, 150mW	SOD-523	6d	1a	Ttr
13•	ai	HZU13B1	Zener diode	12.47..13.03V, Izt=5mA, Zzt=35Ω, 200mW	URP	5d	1a	Ren
13•	aj	HZU13B2	Zener diode	12.91..13.49V, Izt=5mA, Zzt=35Ω, 200mW	URP	5d	1a	Ren
13•	ak	HZU13B3	Zener diode	13.37..13.96V, Izt=5mA, Zzt=35Ω, 200mW	URP	5d	1a	Ren
130	-	1PMT4130	Zener diode	68V±5%, Izt=12.2mA, 1W	DO-216	4d	1a	Msc
130	-	MMF130A	TVS	Vrwm=130V, Vbr=144.0..165.5V, Ipp=0.8A, 200W(1ms)	SOD-123FL	7d	2m	Sst
130	-	P4SMA130	TVS	Vbr=117..143V, Vrwm=105V, 2.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
130	-	P6SMBJ130	TVS	Vrwm=130V, Vbr=117..143V, 3.2A, 600W(1ms)	DO-214AA	1d	1n	Lif

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
130	-	SMBG130	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms)	DO-215AA	5d	1a	Msc
130	-	SMF130A	TVS	Vbr=144..159V, Vrwm=130V, Ipp=0.8A, 200W(1ms)	SOD-123FL	7d	1a	Mco
130A	-	1.5SMC130A	TVS	Vrwm=111V, Vbr=124..137V, Ipp=8.4A, 1500W(1ms)	DO-214AB	1d	1k	Vs
130A	-	1.5SMC130A	TVS	Vrwm=111V, Vbr=124..137V, Ipp=8.4A, 1500W(1ms)	DO-214AB	1d	2s	Lif
130A	-	1.5SMC130A	TVS	Vrwm=111V, Vbr=124..137V, Ipp=8.4A, 1500W(1ms)	DO-214AB	1d	1b	Mde
130A	-	1SMC130A	TVS	Vbr=144..159V, Vrwm=130V, 7.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
130A	-	P4SMA130A	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 400W(1ms)	DO-214AC	1d	1k	Vs
130A	-	P4SMA130A	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
130A	-	P6SMB130A	TVS	Vrwm=130V, Vbr=124..137V, 3.4A, 600W(1ms)	403A	3d	1s	Ons
130A	-	P6SMB130A	TVS	Vrwm=130V, Vbr=124..137V, 3.4A, 600W(1ms)	DO-214AA	1d	1k	Vs
130A	-	P6SMBJ130A	TVS	Vrwm=130V, Vbr=124..137V, 3.3A, 600W(1ms)	DO-214AA	1d	1n	Lif
130A	-	SMAJ130A	TVS	Vrwm=130V, Vbr=144..159V, 1.9A, 400W(1ms)	DO-214AC	1d	1a	Sus
130A	-	SMAJP4KE130A	TVS	Vrwm=111.0V, Vbr=124.0..137.0V, Ipp=2.3A, 400W(1ms)	DO-214AC	1d	1a	Mco
130A	-	SMBG130A	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms)	DO-215AA	5d	1a	Msc
130A	-	SMBJ130A	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms)	DO-214AA	1d	1a	Sus
130A	-	SMBJP6KE130A	TVS	Vrwm=111.0V, Vbr=124.0..137.0V, Ipp=3.4A, 600W(1ms)	DO-214AA	1d	1a	Mco
130A	-	SMCJ1.5KE130A	TVS	Vrwm=111.0V, Vbr=124.0..137.0V, Ipp=8.5A, 1500W(1ms)	DO-214AB	1d	1a	Mco
130A	-	SMCJ130A	TVS	Vrwm=130V, Vbr=144..165.5V, 6.5A, 1500W(1ms)	DO-214AB	1d	1k	Sus
130A	-	SZP6SMB130A	TVS	Vrwm=130V, Vbr=124..137V, 3.4A, 600W(1ms)	403A	3d	1s	Ons
130A	-	TVP04A131A-G	TVS	Vbr=123.50..136.50V, Vrwm=111.0V, Ipp=2.23A, 400W(1ms)	DO-214AC	1d	2o	Cmc
130A	-	TVP06B131A-G	TVS	Vrwm=111.0V, Vbr=123.50..136.50V, Ipp=3.35A, 600W(1ms)	DO-214AA	1d	2o	Cmc
130A	-	UMA130A	TVS	Vrwm=130V, Vbr=144..209V, 2.4A, 500W(1ms)	UltraMite	14d	1v	Msc
130B	-	1SMB3EZ130	Zener diode	130V±5%, Zzt=3755Ω, Izt=5.8mA, 3W	DO-214AA	1d	1a	Pjt
130C	-	1.5SMC130CA	TVS	Vrwm=111V, Vbr=124..137V, Ipp=8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
130C	-	1.5SMC130CA	TVS	Vrwm=111V, Vbr=124..137V, Ipp=8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
130C	-	1.5SMC130CA	TVS	Vrwm=111V, Vbr=124..137V, Ipp=8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
130C	-	MMF130CA	TVS	Vrwm=130V, Vbr=144.0..165.5V, Ipp=0.8A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
130C	-	P4SMA130C	TVS	Vbr=117..143V, Vrwm=105V, 2.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
130C	-	P4SMA130CA	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
130C	-	P6SMB130CA	TVS	Vrwm=130V, Vbr=124..137V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
130C	-	P6SMBJ130C	TVS	Vrwm=130V, Vbr=117..143V, 3.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
130C	-	SMAJP4KE130CA	TVS	Vrwm=111.0V, Vbr=124.0..137.0V, Ipp=2.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
130C	-	SMBG130C	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
130C	-	SMBJP6KE130CA	TVS	Vrwm=111.0V, Vbr=124.0..137.0V, Ipp=3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
130C	-	SMCJ1.5KE130CA	TVS	Vrwm=111.0V, Vbr=124.0..137.0V, Ipp=8.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
130C	-	SMF130CA	TVS	Vbr=144..159V, Vrwm=130V, Ipp=0.8A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
130C	-	TVP04A131CA-G	TVS	Vbr=123.50..136.50V, Vrwm=111.0V, Ipp=2.23A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
130C	-	TVP06B131ACA-G	TVS	Vrwm=111.0V, Vbr=123.50..136.50V, Ipp=3.35A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
130CA	-	1SMC130CA	TVS	Vbr=144..159V, Vrwm=130V, 7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
130CA	-	P4SMA130CA	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
130CA	-	P6SMB130CA	TVS	Vbr=124..137V, Vrwm=111V, 3.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
130CA	-	P6SMBJ130CA	TVS	Vrwm=130V, Vbr=124..137V, 3.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
130CA	-	SMAJ130CA	TVS	Vrwm=130V, Vbr=144..159V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
130CA	-	SMBG130CA	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
130CA	-	SMBJ130CA	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
130CA	-	SMCJ130CA	TVS	Vrwm=130V, Vbr=144..176V, 6.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
130CA	-	UMA130CA	TVS	Vrwm=130V, Vbr=144..209V, 2.4A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
130V	-	SMA130	TVS	Vbr=144..176V, Vrwm=130V, 1.3A, 300W(1ms)	DO-214AC	1d	1a	Mic
130V	-	SMB130	TVS	Vbr=144..176V, Vrwm=130V, 2.6A, 600W(1ms)	DO-214AA	1d	1a	Mic
130V	-	SMC130	TVS	Vbr=144..176V, Vrwm=130V, 6.5A, 1500W(1ms)	DO-214AB	1d	1a	Mic
130VA	-	SMA130A	TVS	Vbr=144..159V, Vrwm=130V, 1.4A, 300W(1ms)	DO-214AC	1d	1a	Mic
130VA	-	SMB130A	TVS	Vbr=144..159V, Vrwm=130V, 2.9A, 600W(1ms)	DO-214AA	1d	1a	Mic
130VA	-	SMC130A	TVS	Vbr=144..159V, Vrwm=130V, 7.2A, 1500W(1ms),	DO-214AB	1d	1a	Mic
130VC	-	SMA130C	TVS	Vbr=144..176V, Vrwm=130V, 1.3A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
130VC	-	SMB130C	TVS	Vbr=144..176V, Vrwm=130V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
130VC	-	SMC130C	TVS	Vbr=144..176V, Vrwm=130V, 6.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
130VCA	-	SMA130CA	TVS	Vbr=144..159V, Vrwm=130V, 1.4A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
130VCA	-	SMB130CA	TVS	Vbr=144..159V, Vrwm=130V, 2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
130VCA	-	SMC130CA	TVS	Vbr=144..159V, Vrwm=130V, 7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
130Z	-	1SMA130Z	Zener diode	130V±5%, Izt=1.9mA, Zzt=700Ω, 1W	DO-214AC	1d	1a	Trs
130Z	-	Z1SMA130A	Zener diode	123.50..136.50V, Izt=1.9mA, 1W	SMA	1d	1ab	Ttr
131	-	1PMT4131	Zener diode	75V±5%, Izt=11.2mA, 1W	DO-216	4d	1a	Msc
132	-	1PMT4132	Zener diode	82V±5%, Izt=10.1mA, 1W	DO-216	4d	1a	Msc
133	-	1PMT4133	Zener diode	87V±5%, Izt=9.6mA, 1W	DO-216	4d	1a	Msc
134	-	1PMT4134	Zener diode	91V±5%, Izt=9.2mA, 1W	DO-216	4d	1a	Msc
135	-	1PMT4135	Zener diode	100V±5%, Izt=8.3mA, 1W	DO-216	4d	1a	Msc
13A	-	1.5SMC13A	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, Ipp=82A, 1500W(1ms)	DO-214AB	1d	1k	Vs
13A	-	1.5SMC13A	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, Ipp=82A, 1500W(1ms)	DO-214AB	1d	2s	Lif
13A	-	1.5SMC13A	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, Ipp=82A, 1500W(1ms)	DO-214AB	1d	1b	Mde
13A	-	1.5SMC13A	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, Ipp=82A, 1500W(1ms)	403	3d	2t	Ons

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
13A	-	1SMC13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, 69.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
13A	-	MMF13A	TVS	Vrwm=13V, Vbr=14.4..16.5V, Ipp=9.3A, 200W(1ms)	SOD-123FL	7d	2m	Sst
13A	-	P1300SAA	Thy-SPD	Vdrm=120V, Vs=160V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Vs
13A	-	P4SMA13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23.0A, 400W(1ms)	DO-214AC	1d	1k	Vs
13A	-	P4SMA13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
13A	-	P6SMB13A	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms)	403A	3d	1s	Ons
13A	-	P6SMB13A	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms)	DO-214AA	1d	1k	Vs
13A	-	P6SMBJ13A	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms)	DO-214AA	1d	1n	Lif
13A	-	RKZ13AKU	Zener diode	12.11..12.75V, Izt=10mA, Zzt=35Ω, 500mW	TURP-FM	7d	1a	Ren
13A	-	SMAJ13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, 18.6A, 400W(1ms)	DO-214AC	1d	1a	Sus
13A	-	SMAJP4KE13A	TVS	Vrwm=11.10V, Vbr=12.40..13.70V, Ipp=22.5A, 400W(1ms)	DO-214AC	1d	1a	Mco
13A	-	SMBG13A	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms)	DO-215AA	5d	1a	Msc
13A	-	SMBJ13A	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms)	DO-214AA	1d	1a	Sus
13A	-	SMBJP6KE13A	TVS	Vrwm=11.10V, Vbr=12.40..13.70V, Ipp=33.5A, 600W(1ms)	DO-214AA	1d	1a	Mco
13A	-	SMCJ1.5KE13A	TVS	Vrwm=11.10V, Vbr=12.40..13.70V, Ipp=83.5A, 1500W(1ms)	DO-214AB	1d	1a	Mco
13A	-	SMCJ13A	TVS	Vrwm=13V, Vbr=14.4..16.5V, 63.A, 1500W(1ms)	DO-214AB	1d	1k	Sus
13A	-	SMF13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, Ipp=9.3A, 200W(1ms)	SOD-123FL	7d	1a	Mco
13A	-	SZP6SMB13A	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms)	403A	3d	1s	Ons
13A	-	TVP04A130A-G	TVS	Vbr=12.35..13.65V, Vrwm=11.1V, Ipp=21.98A, 400W(1ms)	DO-214AC	1d	2o	Cmc
13A	-	TVP06B13A-G	TVS	Vrwm=11.1V, Vbr=12.35..13.65V, Ipp=32.97A, 600W(1ms)	DO-214AA	1d	2o	Cmc
13A	-	UMA13A	TVS	Vrwm=13V, Vbr=14.4..21.5V, 23.2A, 500W(1ms)	UltraMite	14d	1v	Msc
13AP	-	15TPSMC13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 83.5A, 1500W(1ms)	DO-214AB	1d	1p	Lif
13AP	-	4TPSMA13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 22.5A, 400W(1ms)	DO-214AC	1d	1p	Lif
13AP	-	6TPSMB13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 33.5A, 600W(1ms)	DO-214AA	1d	1p	Lif
13B	-	1SMB3EZ13	Zener diode	13V±5%, Zzt=5Ω, Izt=58.0mA, 3W	DO-214AA	1d	1a	Pjt
13B	-	HZF13BP	Zener diode	13V±5%, Iz=20mA, 900mW	LRP	1d	2f	Ren
13B	-	PTZ13B	Zener diode	13V±10%, Izt=20mA, 1W	DO-214AC	1d	1a	Rhm
13B	-	RKZ13BKU	Zener diode	12.55..13.21V, Izt=10mA, Zzt=35Ω, 500mW	TURP-FM	7d	1a	Ren
13B	-	SMAJ5913B	Zener diode	3.3V±5%, Izt=113.6mA, Zzt=10.0Ω, 1.5W	DO-214AC	1d	1a	Mco
13B	-	Z3SMB13B	Zener diode	12.35..13.65V, Izt=58mA, Zzt=5Ω, 3W	DO-214AA	1d	1a	Ttr
13C	-	1.5SMC13CA	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, Ipp=82A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
13C	-	1.5SMC13CA	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, Ipp=82A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
13C	-	1.5SMC13CA	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, Ipp=82A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
13C	-	HZF13CP	Zener diode	13V±10%, Iz=20mA, 900mW	LRP	1d	2f	Ren
13C	-	P4SMA13C	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 22.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
13C	-	P4SMA13CA	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
13C	-	P6SMB13CA	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
13C	-	P6SMBJ13C	TVS	Vrwm=13V, Vbr=11.7..14.3V, 32A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
13C	-	RKZ13CKU	Zener diode	12.99..13.66V, Izt=10mA, Zzt=35Ω, 500mW	TURP-FM	7d	1a	Ren
13C	-	SMAJP4KE13CA	TVS	Vrwm=11.10V, Vbr=12.40..13.70V, Ipp=22.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
13C	-	SMBG13C	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
13C	-	SMBJP6KE13CA	TVS	Vrwm=11.10V, Vbr=12.40..13.70V, Ipp=33.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
13C	-	SMCJ1.5KE13CA	TVS	Vrwm=11.10V, Vbr=12.40..13.70V, Ipp=83.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
13C	-	TVP04A130CA-G	TVS	Vbr=12.35..13.65V, Vrwm=11.1V, Ipp=21.98A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
13C	-	TVP06B13ACA-G	TVS	Vrwm=11.1V, Vbr=12.35..13.65V, Ipp=32.97A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
13CA	-	1SMC13CA	TVS	Vbr=14.4..15.9V, Vrwm=13V, 69.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
13CA	-	MMF13CA	TVS	Vrwm=13V, Vbr=14.4..16.5V, Ipp=9.3A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
13CA	-	P4SMA13CA	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
13CA	-	P6SMB13CA	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 33.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
13CA	-	P6SMBJ13CA	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
13CA	-	SMAJ13CA	TVS	Vrwm=13V, Vbr=14.4..15.9V, 18.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
13CA	-	SMBG13CA	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
13CA	-	SMBJ13CA	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
13CA	-	SMCJ13CA	TVS	Vrwm=13V, Vbr=14.4..16.5V, 63.A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
13CA	-	SMF13CA	TVS	Vbr=14.4..15.9V, Vrwm=13V, Ipp=9.3A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
13CA	-	UMA13CA	TVS	Vrwm=13V, Vbr=14.4..21.5V, 23.2A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
13CP	-	15TPSMC13CA	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 83.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
13CP	-	4TPSMA13CA	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 22.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1p	Lif
13CP	-	6TPSMB13CA	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 33.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
13G	-	ZD13G-CA2	Zener diode	13V±5%, Zzt=37Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
13G	-	ZD13G-CB2	Zener diode	13V±5%, Zzt=37Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
13L	-	SS1P3L	Si-diode	SBR, 30V, 1A, Vf<0.59V(1A)	DO-220AA	8d	1k	Vs
13L	-	ZD13L-CA2	Zener diode	13V±5%, Zzt=37Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
13L	-	ZD13L-CB2	Zener diode	13V±5%, Zzt=37Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
13P	-	BZD27C13P	Zener diode	12.35..13.65V, Zzt=10Ω, Izt=50mA, 800mW	SOD-123FL	7d	1a	Pjt
13P	-	MFPZ13	Zener diode	12.35..13.65V, Izt=50mA, Zzt=10Ω, 800mW	SOD-123FL	7d	1a	Ttr
13V	-	SMA13	TVS	Vbr=14.4..17.6V, Vrwm=13.0V, 12.5A, 300W(1ms)	DO-214AC	1d	1a	Mic
13V	-	SMB13	TVS	Vbr=14.4..17.6V, Vrwm=13V, 25.2A, 600W(1ms)	DO-214AA	1d	1a	Mic
13V	-	SMC13	TVS	Vbr=14.4..17.6V, Vrwm=13V, 63A, 1500W(1ms)	DO-214AB	1d	1a	Mic
13VA	-	SMA13A	TVS	Vbr=14.4..15.9V, Vrwm=13.0V, 14A, 300W(1ms)	DO-214AC	1d	1a	Mic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
13VA	-	SMB13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, 27.9A, 600W(1ms)	DO-214AA	1d	1a	Mic
13VA	-	SMC13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, 69.8A, 1500W(1ms)	DO-214AB	1d	1a	Mic
13VB	-	BZT52B13	Zener diode	12.74..13.26V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tsc
13VB	-	MMSZ13VBW	Zener diode	12.74..13.26V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tac
13VC	-	SMA13C	TVS	Vbr=14.4..17.6V, Vrwm=13.0V, 12.5A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
13VC	-	SMB13C	TVS	Vbr=14.4..17.6V, Vrwm=13V, 25.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
13VC	-	SMC13C	TVS	Vbr=14.4..17.6V, Vrwm=13V, 63A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
13VCA	-	SMA13CA	TVS	Vbr=14.4..15.9V, Vrwm=13.0V, 14A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
13VCA	-	SMB13CA	TVS	Vbr=14.4..15.9V, Vrwm=13V, 27.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
13VCA	-	SMC13CA	TVS	Vbr=14.4..15.9V, Vrwm=13V, 69.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
13VZ	-	BZT52C13	Zener diode	12.35..13.65V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tsc
13VZ	-	MMSZ13VCW	Zener diode	12.35..13.65V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tac
13VZ	-	TCMMSZ13V	Zener diode	13V±5%, Izt=5mA, Zzt=28Ω, 500mW	SOD-123FL	7d	1a	Tac
13VZ	-	ZGFM0513C-MH	Zener diode	12.35..13.65V, Izt=5mA, Zzt=28Ω, 500mW	SOD-123	5d	1a	Pic
14	-	1SR154-400	Si-diode	Rectfier, 400V, 1A, Vf<1V(1A)	SOD-106	1d	1ka	Rhm
14	-	BZX384C30	Zener diode	28.0..32.0V, Izt=2.0mA, 200mW	SOD-323	5d	1a	Ttr
14	-	CMZ15	Zener diode	15V±5%, Izt=10mA, 2W	M-FLAT	7d	1a	Tos
14	-	FDZ30T	Zener diode	28..32V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Fis
14	-	FM140-M	Si-diode	SBR, 40V, 1.0A, Vf<0.50V(1A)	SOD-123L	10d	1a	Tfr
14	-	KL3N14	Thy-SPD	V Of-St=130V, Ifsm=30A(1ms), Ih=100mA, Bidir.	1F	1ba	1l	Shi
14	-	LM3Z30VT1G	Zener diode	28..32V, Izt=2mA, 200mW	SOD-323	5d	1u	Lrc
14	-	LM5Z30VT1G	Zener diode	28..32V, Izt=2mA, 200mW	SOD-523	6d	1g	Lrc
14	-	MM3Z30V	Zener diode	28..32V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Sec
14	-	MM5Z30V	Zener diode	30V±5%, Izt=2mA, Zzt=80Ω, 100mW	SOD-523	6d	1u	Wtr
14	-	MMPZ5256BPT	Zener diode	28.50..31.50V, Izt=5mA, Zzt=78Ω, 225mW	SOD-323	5d	1a	Chm
14	-	MSS1P4	Si-diode	SBR, 40V, 1A, Vf<0.55V(1A)	MicroSMP	8d	1k	Vs
14	-	MSS2P3	Si-diode	SBR, 30V, 2A, Vf<0.60V(2A)	MicroSMP	8d	1k	Vs
14	-	SMA3C14	Zener diode	14V±5%, Izt=53mA, Zzt<5Ω, 3W	DO-214AC	1d	1a	Exc
14	-	SMBG14	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms)	DO-215AA	5d	1a	Msc
14	-	SMD14APT	Si-diode	SBR, 40V, 1A, Vf<0.46V(1A)	SOD-123S	8d	1a	Chm
14	-	SS1P4	Si-diode	SBR, 40V, 1A, Vf<0.53V(1A)	DO-220AA	8d	1k	Vs
14	-	ZD30V0	Zener diode	28..32V, 2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Cys
14-	-	MAZ81400M	Zener diode	13.65..14.35V, Zzt=40Ω(5mA), 150mW	SC-76	6d	1a	Pan
14-	-	MAZ8140GML	Zener diode	13.65..14.35V, Zzt=40Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
140A	-	TSP140SA	Thy-SPD	V Of-St=140V, 50A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
140B	-	1SMB3EZ140	Zener diode	140V±5%, Zzt=475Ω, Izt=5.3mA, 3W	DO-214AA	1d	1a	Pjt
140B	-	TSP140SB	Thy-SPD	V Of-St=140V, 80A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
140C	-	TSP140SC	Thy-SPD	V Of-St=140V, 100A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
147Z	-	BYD147	Si-diode	U-fast Rectifier, 400V, 1A, Vf<1.05V(1A), 35ns	1206	14d	1v	Zow
14A	-	1SMC14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, 64.7A, 1500W(1ms)	DO-214AB	1d	1a	Eic
14A	-	MMF14A	TVS	Vrwm=14V, Vbr=15.6..17.9V, Ipp=8.6A, 200W(1ms)	SOD-123FL	7d	2m	Sst
14A	-	SMAJ14A	TVS	Vrwm=14V, Vbr=15.6..17.2V, 17.2A, 400W(1ms)	DO-214AC	1d	1a	Sus
14A	-	SMBG14A	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms)	DO-215AA	5d	1a	Msc
14A	-	SMBJ14A	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms)	DO-214AA	1d	1a	Sus
14A	-	SMCJ14A	TVS	Vrwm=14V, Vbr=15.6..19.1V, 58.1A, 1500W(1ms)	DO-214AB	1d	1k	Sus
14A	-	SMD14ALPT	Si-diode	SBR, 40V, 1A, Vf<0.4V(1A)	SOD-123S	8d	1a	Chm
14A	-	SMF14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, Ipp=8.6A, 200W(1ms)	SOD-123FL	7d	1a	Mco
14A	-	UMA14A	TVS	Vrwm=14V, Vbr=15.6..23.2V, 21.5A, 500W(1ms)	UltraMite	14d	1v	Msc
14B	-	1SMB3EZ14	Zener diode	14V±5%, Zzt=6Ω, Izt=53.0mA, 3W	DO-214AA	1d	1a	Pjt
14B	-	SMAJ5914B	Zener diode	3.6V±5%, Izt=104.2mA, Zzt=9.0Ω, 1.5W	DO-214AC	1d	1a	Mco
14B	-	Z3SMB14B	Zener diode	13.30..14.70V, Izt=53mA, Zzt=5Ω, 3W	DO-214AA	1d	1a	Ttr
14C	-	SMBG14C	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
14CA	-	1SMC14CA	TVS	Vbr=15.6..17.2V, Vrwm=14V, 64.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
14CA	-	MMF14CA	TVS	Vrwm=14V, Vbr=15.6..17.9V, Ipp=8.6A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
14CA	-	SMAJ14CA	TVS	Vrwm=14V, Vbr=15.6..17.2V, 17.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
14CA	-	SMBG14CA	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
14CA	-	SMBJ14CA	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
14CA	-	SMCJ14CA	TVS	Vrwm=14V, Vbr=15.6..19.1V, 58.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
14CA	-	SMF14CA	TVS	Vbr=15.6..172V, Vrwm=14V, Ipp=8.6A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
14CA	-	UMA14CA	TVS	Vrwm=14V, Vbr=15.6..23.2V, 21.5A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
14L	-	SS1P4L	Si-diode	SBR, 40V, 1A, Vf<0.59V(1A)	DO-220AA	8d	1k	Vs
14LA	-	SSM14LAPT	Si-diode	SBR, 40V, 1A, Vf<0.32V(1A)	DO-214AC	1d	1a	Chm
14LL	-	SSM14LLPT	Si-diode	SBR, 40V, 1A, Vf<0.27V(1A)	DO-214AC	1d	1a	Chm
14P	-	BZD27C14P	Zener diode	13.30..14.70V, Zzt=10Ω, Izt=50mA, 800mW	SOD-123FL	7d	1a	Pjt
14P	-	MFPZ14	Zener diode	13.3..14.7V, Izt=50mA, Zzt=10Ω, 800mW	SOD-123FL	7d	1a	Ttr
14V	-	SMA14	TVS	Vbr=15.6..19.1V, Vrwm=14.0V, 11.6A, 300W(1ms)	DO-214AC	1d	1a	Mic
14V	-	SMB14	TVS	Vbr=15.6..19.1V, Vrwm=14V, 23.3A, 600W(1ms)	DO-214AA	1d	1a	Mic
14V	-	SMC14	TVS	Vbr=15.6..19.1V, Vrwm=14V, 58.1A, 1500W(1ms)	DO-214AB	1d	1a	Mic
14VA	-	SMA14A	TVS	Vbr=15.6..17.2V, Vrwm=14.0V, 12.9A, 300W(1ms)	DO-214AC	1d	1a	Mic
14VA	-	SMB14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, 25.9A, 600W(1ms)	DO-214AA	1d	1a	Mic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
14VA	-	SMC14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, 64.7A, 1500W(1ms)	DO-214AB	1d	1a	Mic
14VC	-	SMA14C	TVS	Vbr=15.6..19.1V, Vrwm=14.0V, 11.6A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
14VC	-	SMB14C	TVS	Vbr=15.6..19.1V, Vrwm=14V, 23.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
14VC	-	SMC14C	TVS	Vbr=15.6..19.1V, Vrwm=14V, 58.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
14VCA	-	SMA14CA	TVS	Vbr=15.6..17.2V, Vrwm=14.0V, 12.9A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
14VCA	-	SMB14CA	TVS	Vbr=15.6..17.2V, Vrwm=14V, 25.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
14VCA	-	SMC14CA	TVS	Vbr=15.6..17.2V, Vrwm=14V, 64.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
15	-	BZX584B2V7	Zener diode	2.65..2.75V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523FL	7d	1a	Tac
15	-	BZY55-C15	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 500mW	0805	70d	2d	Tsc
15	-	CDZ55C15	Zener diode	14.25..15.75V, Zzt=30Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
15	-	CDZ55C15S	Zener diode	14.25..15.75V, Zzt=30Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
15	-	CDZ55C15T	Zener diode	14.25..15.75V, Zzt=30Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
15	-	CTZ55C15	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 500mW	1206	70d	2d	Ctc
15	-	CZRNC55C15-G	Zener diode	14.25..15.75V, Zt=30Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
15	-	CZRSC55C15-G	Zener diode	14.25..15.75V, Zt=30Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
15	-	EDZ11B	Zener diode	10.76..11.22V, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Rhm
15	-	EDZV11B	Zener diode	10.76..11.22V, Izt=5.0mA, Zzt=30Ω, 150mW	SOD-523	6d	2v	Rhm
15	-	FDZ11EV	Zener diode	10.760..11.220V, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Fis
15	-	FDZ11VT	Zener diode	10.760..11.220V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Fis
15	-	GDZ2V2B-V-G	Zener diode	2.22..2.41V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	2m	Vs
15	-	KDZ15EV	Zener diode	13.8..15.6V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
15	-	KDZ15V	Zener diode	13.8..15.6V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
15	-	KDZ15VV	Zener diode	13.80..15.60V, Izt=5mA, Zzt=15Ω, 100mW	VSC	7d	1a	Kec
15	-	LBZT52B11T1G	Zener diode	10.76..11.22V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
15	-	LEDZ11BT1G	Zener diode	10.76..11.22V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
15	-	LUDZS11BT1G	Zener diode	10.76..11.22V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
15	-	MAZ5150	Zener diode	13.9..15.6V, Zzt=10Ω(5mA), 500mW	MP2	11d	1a	Pan
15	-	MAZ81500H	Zener diode	14.95..15.6V, Zzt=40Ω(5mA), 150mW	SC-76	6d	1a	Pan
15	-	MAZS150	Zener diode	13.9..15.6V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
15	-	MAZY150	Zener diode	13.5..16.5V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
15	-	MM5Z2V7B	Zener diode	2.65..2.75V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523FL	7d	1a	Tac
15	-	MSS1P5	Si-diode	SBR, 50V, 1A, Vf<0.68V(1A)	MicroSMP	8d	1k	Vs
15	-	P4SMA15	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, 19.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
15	-	P6SMBJ15	TVS	Vrwm=15V, Vbr=13.5..16.5V, 27A, 600W(1ms)	DO-214AA	1d	1n	Lif
15	-	SMA3C15	Zener diode	15V±5%, Izt=50mA, Zzt<5.5Ω, 3W	DO-214AC	1d	1a	Exc
15	-	SMBG15	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-215AA	5d	1a	Msc
15	-	SML4744	Zener diode	15V±5%, Izt=17mA, Zzt=14Ω, 1W	DO-214AC	1d	1k	Vs
15	-	TDZ11B	Zener diode	11V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
15	-	TZD15WS	Zener diode	13.80..15.60V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Ttr
15	-	TZD15WT	Zener diode	13.80..15.60V, Izt=5mA, Zzt=15Ω, 150mW	SOD-523	6d	1a	Ttr
15	-	TZD15WU	Zener diode	14.34..14.98V, Izt=5mA, Zzt=42Ω, 100mW	SOD-723	7d	1a	Ttr
15	-	U1ZB15	Zener diode	13.5..16.5V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos
15	-	UDZS11B	Zener diode	10.76..11.22V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Wtr
15	-	UDZS11B	Zener diode	11V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
15	-	UDZV11B	Zener diode	10.76..11.22V, Izt=5.0mA, Zzt=30Ω, 200mW	SOD-323	5d	2v	Rhm
15	-	USFZ15V	Zener diode	15V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
15	-	VDZS11B	Zener diode	11V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
15	ah	HZC15	Zener diode	15V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
15	ay	CRZ15	Zener diode	13.5..16.5V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
15-	-	MAZ81500M	Zener diode	14.6..15.35V, Zzt=40Ω(5mA), 150mW	SC-76	6d	1a	Pan
15-	-	MAZ8150GML	Zener diode	14.6..15.35V, Zzt=40Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
15-	-	MAZS1500M	Zener diode	14.6..15.35V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
15/15	ae	SD15C	TVS	Vrwm=15.0V, Vbr=16.7..24V, Ipp=15A, 350W(1ms), Bidir.	SOD-323	5ba	1e	Smt
15^	-	MAZ81500H	Zener diode	14.95..15.6V, Zzt=40Ω(5mA), 150mW	SC-76	6d	1a	Pan
15^	-	MAZ8150GHL	Zener diode	14.95..15.6V, Zzt=40Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
15^	-	MAZS1500H	Zener diode	14.95..15.6V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
15_	-	MAZ81500L	Zener diode	13.9..14.76V, Zzt=40Ω(5mA), 150mW	SC-76	6d	1a	Pan
15_	-	MAZ8150GLL	Zener diode	13.9..14.76V, Zzt=40Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
15_	-	MAZS1500L	Zener diode	13.9..14.76V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
15•	-	RKZ15B2KG	Zener diode	14.34..14.98V, Izt=5mA, Zzt=40Ω, 200mW	URP	5d	2e	Ren
15•	-	RKZ15B2KJ	Zener diode	14.34..14.98V, Izt=5mA, Zzt=40Ω, 150mW	UFP	7d	2e	Ren
15•	-	TZD15YWS	Zener diode	14.34..14.98V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Ttr
15•	-	TZD15YWT	Zener diode	14.34..14.98V, Izt=5mA, Zzt=15Ω, 150mW	SOD-523	6d	1a	Ttr
15•	ai	HZU15B1	Zener diode	13.84..14.46V, Izt=5mA, Zzt=40Ω, 200mW	URP	5d	1a	Ren
15•	aj	HZU15B2	Zener diode	14.34..14.98V, Izt=5mA, Zzt=40Ω, 200mW	URP	5d	1a	Ren
15•	ak	HZU15B3	Zener diode	14.85..15.52V, Izt=5mA, Zzt=40Ω, 200mW	URP	5d	1a	Ren
150	-	MMF150A	TVS	Vrwm=150V, Vbr=167.0..192.5V, Ipp=0.7A, 200W(1ms)	SOD-123FL	7d	2m	Sst
150	-	P4SMA150	TVS	Vbr=135..165V, Vrwm=121V, 2.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
150	-	P6SMBJ150	TVS	Vrwm=150V, br=135..165V, 2.8A, 600W(1ms)	DO-214AA	1d	1n	Lif
150	-	SMBG150	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-215AA	5d	1a	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
150	-	SMF150A	TVS	Vbr=167..185V, Vrwm=150V, Ipp=0.7A, 200W(1ms)	SOD-123FL	7d	1a	Mco
150	-	U1ZB150	Zener diode	135..165V, Izt=2mA, 1W	3-4D1A	1d	2fa	Tos
150A	-	1.5SMC150A	TVS	Vrwm=128V, Vbr=143..158V, Ipp=7.2A, 1500W(1ms)	DO-214AB	1d	2s	Lif
150A	-	1.5SMC150A	TVS	Vrwm=128V, Vbr=143..158V, Ipp=7.2A, 1500W(1ms)	DO-214AB	1d	1b	Mde
150A	-	1.5SMC150A	TVS	Vrwm=128V, Vbr=143..158V, Ipp=7.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
150A	-	1SMC150A	TVS	Vbr=167..185V, Vrwm=150V, 6.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
150A	-	P4SMA150A	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 400W(1ms)	DO-214AC	1d	1k	Vs
150A	-	P4SMA150A	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
150A	-	P6SMB150A	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms)	DO-214AA	1d	1k	Vs
150A	-	P6SMBJ150A	TVS	Vrwm=150V, br=135..165V, 2.9A, 600W(1ms)	DO-214AA	1d	1n	Lif
150A	-	SMAJ150A	TVS	Vrwm=150V, Vbr=167..185V, 1.6A, 400W(1ms)	DO-214AC	1d	1a	Sus
150A	-	SMAJP4KE150A	TVS	Vrwm=128.0V, Vbr=143.0..158.0V, Ipp=2.0A, 400W(1ms)	DO-214AC	1d	1a	Mco
150A	-	SMBG150A	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-215AA	5d	1a	Msc
150A	-	SMBJ150A	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-214AA	1d	1a	Sus
150A	-	SMBJP6KE150A	TVS	Vrwm=128.0V, Vbr=143.0..158.0V, Ipp=2.9A, 600W(1ms)	DO-214AA	1d	1a	Mco
150A	-	SMCJ1.5KE150A	TVS	Vrwm=128.0V, Vbr=143.0..158.0V, Ipp=7.3A, 1500W(1ms)	DO-214AB	1d	1a	Mco
150A	-	SMCJ150A	TVS	Vrwm=150V, Vbr=167..192.5V, 5.6A, 1500W(1ms)	DO-214AB	1d	1k	Sus
150A	-	TVP04A151A-G	TVS	Vbr=142.50..157.50V, Vrwm=128.0V, Ipp=1.93A, 400W(1ms)	DO-214AC	1d	2o	Cmc
150A	-	TVP06B151A-G	TVS	Vrwm=128.0V, Vbr=142.50..157.50V, Ipp=2.90A, 600W(1ms)	DO-214AA	1d	2o	Cmc
150A	-	UMA150A	TVS	Vrwm=150V, Vbr=167..243V, 2.1A, 500W(1ms)	UltraMite	14d	1v	Msc
150B	-	1SMB3EZ150	Zener diode	150V±5%, Zzt=550Ω, Izt=5mA, 3W	DO-214AA	1d	1a	Pjt
150C	-	1.5SMC150CA	TVS	Vrwm=128V, Vbr=143..158V, Ipp=7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
150C	-	1.5SMC150CA	TVS	Vrwm=128V, Vbr=143..158V, Ipp=7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
150C	-	1.5SMC150CA	TVS	Vrwm=128V, Vbr=143..158V, Ipp=7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
150C	-	MMF150CA	TVS	Vrwm=150V, Vbr=167.0..192.5V, Ipp=0.7A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
150C	-	P4SMA150C	TVS	Vbr=135..165V, Vrwm=121V, 2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
150C	-	P4SMA150CA	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
150C	-	P6SMB150CA	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
150C	-	P6SMBJ150C	TVS	Vrwm=150V, br=135..165V, 2.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
150C	-	SMAJP4KE150CA	TVS	Vrwm=128.0V, Vbr=143.0..158.0V, Ipp=2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
150C	-	SMBG150C	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
150C	-	SMBJP6KE150CA	TVS	Vrwm=128.0V, Vbr=143.0..158.0V, Ipp=2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
150C	-	SMCJ1.5KE150CA	TVS	Vrwm=128.0V, Vbr=143.0..158.0V, Ipp=7.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
150C	-	SMF150CA	TVS	Vbr=167..185V, Vrwm=150V, Ipp=0.7A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
150C	-	TVP04A151CA-G	TVS	Vbr=142.50..157.50V, Vrwm=128.0V, Ipp=1.93A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
150C	-	TVP06B151ACA-G	TVS	Vrwm=128.0V, Vbr=142.50..157.50V, Ipp=2.90A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
150CA	-	1SMC150CA	TVS	Vbr=167..185V, Vrwm=150V, 6.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
150CA	-	P4SMA150CA	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
150CA	-	P6SMB150CA	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
150CA	-	P6SMBJ150CA	TVS	Vrwm=150V, br=135..165V, 2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
150CA	-	SMAJ150CA	TVS	Vrwm=150V, Vbr=167..185V, 1.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
150CA	-	SMBG150CA	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
150CA	-	SMBJ150CA	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
150CA	-	SMCJ150CA	TVS	Vrwm=150V, Vbr=167..192.5V, 5.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
150CA	-	UMA150CA	TVS	Vrwm=150V, Vbr=167..243V, 2.1A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
150V	-	SMA150	TVS	Vbr=167..204V, Vrwm=150.0V, 1.1A, 300W(1ms)	DO-214AC	1d	1a	Mic
150V	-	SMB150	TVS	Vbr=167..204V, Vrwm=150V, 2.2A, 600W(1ms)	DO-214AA	1d	1a	Mic
150V	-	SMC150	TVS	Vbr=167..204V, Vrwm=150V, 5.6A, 1500W(1ms)	DO-214AB	1d	1a	Mic
150VA	-	SMA150A	TVS	Vbr=167..185V, Vrwm=150.0V, 1.2A, 300W(1ms)	DO-214AC	1d	1a	Mic
150VA	-	SMB150A	TVS	Vbr=167..185V, Vrwm=150V, 2.5A, 600W(1ms)	DO-214AA	1d	1a	Mic
150VA	-	SMC150A	TVS	Vbr=167..185V, Vrwm=150V, 6.2A, 1500W(1ms),	DO-214AB	1d	1a	Mic
150VC	-	SMA150C	TVS	Vbr=167..204V, Vrwm=150.0V, 1.1A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
150VC	-	SMB150C	TVS	Vbr=167..204V, Vrwm=150V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
150VC	-	SMC150C	TVS	Vbr=167..204V, Vrwm=150V, 5.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
150VCA	-	SMA150CA	TVS	Vbr=167..185V, Vrwm=150.0V, 1.2A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
150VCA	-	SMB150CA	TVS	Vbr=167..185V, Vrwm=150V, 2.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
150VCA	-	SMC150CA	TVS	Vbr=167..185V, Vrwm=150V, 6.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
150Z	-	1SMA150Z	Zener diode	150V±5%, Izt=1.7mA, Zzt=1000Ω, 1W	DO-214AC	1d	1a	Trs
150Z	-	Z1SMA150A	Zener diode	142.50..157.50V, Izt=1.7mA, 1W	SMA	1d	1ab	Ttr
151	-	HZU15-1L	Zener diode	14.1..14.7V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
1510	-	SZ1510	Zener diode	10V±5%, Zzt=7.0Ω, Izt=91mA, 1W	DO-214AC	1d	1a	Eic
1511	-	SZ1511	Zener diode	11V±5%, Zzt=8.0Ω, Izt=83mA, 1W	DO-214AC	1d	1a	Eic
1512	-	SZ1512	Zener diode	12V±5%, Zzt=9.0Ω, Izt=76mA, 1W	DO-214AC	1d	1a	Eic
1513	-	SZ1513	Zener diode	13V±5%, Zzt=10Ω, Izt=69mA, 1W	DO-214AC	1d	1a	Eic
1515	-	SZ1515	Zener diode	15V±5%, Zzt=14Ω, Izt=61mA, 1W	DO-214AC	1d	1a	Eic
1516	-	SZ1516	Zener diode	16V±5%, Zzt=16Ω, Izt=57mA, 1W	DO-214AC	1d	1a	Eic
1518	-	SZ1518	Zener diode	18V±5%, Zzt=20Ω, Izt=50mA, 1W	DO-214AC	1d	1a	Eic
152	-	HZU15-2L	Zener diode	14.5..15.1V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
1520	-	SZ1520	Zener diode	20V±5%, Zzt=22Ω, Izt=45mA, 1W	DO-214AC	1d	1a	Eic
1522	-	SZ1522	Zener diode	22V±5%, Zzt=23Ω, Izt=41mA, 1W	DO-214AC	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
1524	-	SZ1524	Zener diode	24V±5%, Zzt=25Ω, Izt=38mA, 1W	DO-214AC	1d	1a	Eic
1527	-	SZ1527	Zener diode	27V±5%, Zzt=35Ω, Izt=34mA, 1W	DO-214AC	1d	1a	Eic
153	-	HZU15-3L	Zener diode	14.9..15.5V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
1530	-	SZ1530	Zener diode	30V±5%, Zzt=40Ω, Izt=30mA, 1W	DO-214AC	1d	1a	Eic
1533	-	SZ1533	Zener diode	33V±5%, Zzt=45Ω, Izt=27mA, 1W	DO-214AC	1d	1a	Eic
1536	-	SZ1536	Zener diode	36V±5%, Zzt=50Ω, Izt=25mA, 1W	DO-214AC	1d	1a	Eic
1539	-	SZ1539	Zener diode	39V±5%, Zzt=60Ω, Izt=23mA, 1W	DO-214AC	1d	1a	Eic
153D	-	SZ153D	Zener diode	3.3V±5%, Zzt=10Ω, Izt=276mA, 1W	DO-214AC	1d	1a	Eic
153G	-	SZ153G	Zener diode	3.6V±5%, Zzt=10Ω, Izt=252mA, 1W	DO-214AC	1d	1a	Eic
153J	-	SZ153J	Zener diode	3.9V±5%, Zzt=9.0Ω, Izt=234mA, 1W	DO-214AC	1d	1a	Eic
1543	-	SZ1543	Zener diode	43V±5%, Zzt=70Ω, Izt=22mA, 1W	DO-214AC	1d	1a	Eic
1547	-	SZ1547	Zener diode	47V±5%, Zzt=80Ω, Izt=19mA, 1W	DO-214AC	1d	1a	Eic
154D	-	SZ154D	Zener diode	4.3V±5%, Zzt=9.0Ω, Izt=217mA, 1W	DO-214AC	1d	1a	Eic
154H	-	SZ154H	Zener diode	4.7V±5%, Zzt=8.0Ω, Izt=193mA, 1W	DO-214AC	1d	1a	Eic
1551	-	SZ1551	Zener diode	51V±5%, Zzt=95Ω, Izt=18mA, 1W	DO-214AC	1d	1a	Eic
1556	-	SZ1556	Zener diode	56V±5%, Zzt=110Ω, Izt=16mA, 1W	DO-214AC	1d	1a	Eic
155B	-	SZ155B	Zener diode	5.1V±5%, Zzt=7.0Ω, Izt=178mA, 1W	DO-214AC	1d	1a	Eic
155G	-	SZ155G	Zener diode	5.6V±5%, Zzt=5.0Ω, Izt=162mA, 1W	DO-214AC	1d	1a	Eic
1562	-	SZ1562	Zener diode	62V±5%, Zzt=125Ω, Izt=14mA, 1W	DO-214AC	1d	1a	Eic
1568	-	SZ1568	Zener diode	68V±5%, Zzt=150Ω, Izt=13mA, 1W	DO-214AC	1d	1a	Eic
156C	-	SZ156C	Zener diode	6.2V±5%, Zzt=2.0Ω, Izt=146mA, 1W	DO-214AC	1d	1a	Eic
156I	-	SZ156I	Zener diode	6.8V±5%, Zzt=3.5Ω, Izt=133mA, 1W	DO-214AC	1d	1a	Eic
1575	-	SZ1575	Zener diode	75V±5%, Zzt=175Ω, Izt=12mA, 1W	DO-214AC	1d	1a	Eic
157F	-	SZ157F	Zener diode	7.5V±5%, Zzt=4.0Ω, Izt=121mA, 1W	DO-214AC	1d	1a	Eic
1582	-	SZ1582	Zener diode	82V±5%, Zzt=200Ω, Izt=11mA, 1W	DO-214AC	1d	1a	Eic
158C	-	SZ158C	Zener diode	8.2V±5%, Zzt=4.5Ω, Izt=110mA, 1W	DO-214AC	1d	1a	Eic
1591	-	SZ1591	Zener diode	91V±5%, Zzt=250Ω, Izt=10mA, 1W	DO-214AC	1d	1a	Eic
159B	-	SZ159B	Zener diode	9.1V±5%, Zzt=5.0Ω, Izt=100mA, 1W	DO-214AC	1d	1a	Eic
15A	-	1.5SMC15A	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, Ipp=71A, 1500W(1ms)	DO-214AB	1d	1k	Vs
15A	-	1.5SMC15A	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, Ipp=71A, 1500W(1ms)	DO-214AB	1d	1b	Mde
15A	-	1.5SMC15A	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, Ipp=71A, 1500W(1ms)	403	3d	2t	Ons
15A	-	1.5SMC15A	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, Ipp=71A, 1500W(1ms)	DO-214AB	1d	2s	Lif
15A	-	1SMC15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, 61.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
15A	-	MMF15A	TVS	Vrwm=15V, Vbr=16.7..19.2V, Ipp=8.2A, 200W(1ms)	SOD-123FL	7d	2m	Sst
15A	-	P1500SAA	Thy-SPD	Vdrm=140V, Vs=180V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Vs
15A	-	P4SMA15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
15A	-	P4SMA15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20.0A, 400W(1ms)	DO-214AC	1d	1k	Vs
15A	-	P6SMB15A	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28.3A, 600W(1ms)	403A	3d	1s	Ons
15A	-	P6SMB15A	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
15A	-	P6SMBJ15A	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28A, 600W(1ms)	DO-214AA	1d	1n	Lif
15A	-	RKZ15AKU	Zener diode	13.44..14.13V, Izt=10mA, Zzt=40Ω, 500mW	TURP-FM	7d	1a	Ren
15A	-	SMAJ15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, 16.4A, 400W(1ms)	DO-214AC	1d	1a	Sus
15A	-	SMAJP4KE15A	TVS	Vrwm=12.80V, Vbr=14.30..15.80V, Ipp=19.3A, 400W(1ms)	DO-214AC	1d	1a	Mco
15A	-	SMBG15A	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-215AA	5d	1a	Msc
15A	-	SMBJ15A	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-214AA	1d	1a	Sus
15A	-	SMBJP6KE15A	TVS	Vrwm=12.80V, Vbr=14.30..15.80V, Ipp=28.8A, 600W(1ms)	DO-214AA	1d	1a	Mco
15A	-	SMCJ1.5KE15A	TVS	Vrwm=12.80V, Vbr=14.30..15.80V, Ipp=71.7A, 1500W(1ms)	DO-214AB	1d	1a	Mco
15A	-	SMCJ15A	TVS	Vrwm=15V, Vbr=16.7..19.2V, 55.8A, 1500W(1ms)	DO-214AB	1d	1k	Sus
15A	-	SMF15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, Ipp=8.2A, 200W(1ms)	SOD-123FL	7d	1a	Mco
15A	-	SZP6SMB15A	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28.3A, 600W(1ms)	403A	3d	1s	Ons
15A	-	TVP04A150A-G	TVS	Vbr=14.25..15.75V, Vrwm=12.8V, Ipp=18.87A, 400W(1ms)	DO-214AC	1d	2o	Cmc
15A	-	TVP06B15A-G	TVS	Vrwm=12.8V, Vbr=14.25..15.75V, Ipp=28.30A, 600W(1ms)	DO-214AA	1d	2o	Cmc
15A	-	UMA15A	TVS	Vrwm=15V, Vbr=16.7..24.4V, 20.6A, 500W(1ms)	UltraMite	14d	1v	Msc
15AP	-	15TPSMC15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 71.7A, 1500W(1ms)	DO-214AB	1d	1p	Lif
15AP	-	4TPSMA15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 19.3A, 400W(1ms)	DO-214AC	1d	1p	Lif
15AP	-	6TPSMB15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 28.8A, 600W(1ms)	DO-214AA	1d	1p	Lif
15B	-	1SMB3EZ15	Zener diode	15V±5%, Zzt=7Ω, Izt=50.0mA, 3W	DO-214AA	1d	1a	Pjt
15B	-	HZF15BP	Zener diode	15V±5%, Iz=20mA, 900mW	LRP	1d	2f	Ren
15B	-	PTZ15B	Zener diode	15V±10%, Izt=20mA, 1W	DO-214AC	1d	1a	Rhm
15B	-	RKZ15BKU	Zener diode	13.89..14.62V, Izt=10mA, Zzt=40Ω, 500mW	TURP-FM	7d	1a	Ren
15B	-	SMAJ5915B	Zener diode	3.9V±5%, Izt=96.1mA, Zzt=7.5Ω, 1.5W	DO-214AC	1d	1a	Mco
15B	-	Z3SMB15B	Zener diode	14.25..15.75V, Izt=50mA, Zzt=6Ω, 3W	DO-214AA	1d	1a	Ttr
15B0	-	SZ15B0	Zener diode	100V±5%, Zzt=350Ω, Izt=9.0mA, 1W	DO-214AC	1d	1a	Eic
15B1	-	SZ15B1	Zener diode	110V±5%, Zzt=450Ω, Izt=8.6mA, 1W	DO-214AC	1d	1a	Eic
15B2	-	SZ15B2	Zener diode	120V±5%, Zzt=550Ω, Izt=7.8mA, 1W	DO-214AC	1d	1a	Eic
15B3	-	SZ15B3	Zener diode	130V±5%, Zzt=700Ω, Izt=7.0mA, 1W	DO-214AC	1d	1a	Eic
15B5	-	SZ15B5	Zener diode	150V±5%, Zzt=1000Ω, Izt=6.4mA, 1W	DO-214AC	1d	1a	Eic
15B6	-	SZ15B6	Zener diode	160V±5%, Zzt=1100Ω, Izt=5.8mA, 1W	DO-214AC	1d	1a	Eic
15B8	-	SZ15B8	Zener diode	180V±5%, Zzt=1200Ω, Izt=5.2mA, 1W	DO-214AC	1d	1a	Eic
15C	-	1.5SMC15CA	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, Ipp=71A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
15C	-	1.5SMC15CA	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, Ipp=71A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
15C	-	1.5SMC15CA	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, Ipp=71A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
15C	-	HZF15CP	Zener diode	15V±10%, Iz=20mA, 900mW	LRP	1d	2f	Ren
15C	-	P4SMA15C	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, 19.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
15C	-	P4SMA15CA	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
15C	-	P6SMB15CA	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
15C	-	P6SMBJ15C	TVS	Vrwm=15V, Vbr=13.5..16.5V, 27A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
15C	-	RKZ15CKU	Zener diode	14.35..15.09V, Izt=10mA, Zzt=40Ω, 500mW	TURP-FM	7d	1a	Ren
15C	-	SMAJP4KE15CA	TVS	Vrwm=12.80V, Vbr=14.30..15.80V, Ipp=19.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
15C	-	SMBG15C	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
15C	-	SMBJP6KE15CA	TVS	Vrwm=12.80V, Vbr=14.30..15.80V, Ipp=28.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
15C	-	SMCJ1.5KE15CA	TVS	Vrwm=12.80V, Vbr=14.30..15.80V, Ipp=71.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
15C	-	TVP04A150CA-G	TVS	Vbr=14.25..15.75V, Vrwm=12.8V, Ipp=18.87A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
15C	-	TVP06B15ACA-G	TVS	Vrwm=12.8V, Vbr=14.25..15.75V, Ipp=28.30A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
15CA	-	1SMC15CA	TVS	Vbr=16.7..18.5V, Vrwm=15V, 61.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
15CA	-	MMF15CA	TVS	Vrwm=15V, Vbr=16.7..19.2V, Ipp=8.2A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
15CA	-	P4SMA15CA	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
15CA	-	P6SMB15CA	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 28.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
15CA	-	P6SMBJ15CA	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
15CA	-	SMAJ15CA	TVS	Vrwm=15V, Vbr=16.7..18.5V, 16.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
15CA	-	SMBG15CA	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
15CA	-	SMBJ15CA	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
15CA	-	SMCJ15CA	TVS	Vrwm=15V, Vbr=16.7..19.2V, 55.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
15CA	-	SMF15CA	TVS	Vbr=16.7..18.5V, Vrwm=15V, Ipp=8.2A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
15CA	-	UMA15CA	TVS	Vrwm=15V, Vbr=16.7..24.4V, 20.6A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
15CP	-	15TPSMC15CA	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 71.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
15CP	-	4TPSMA15CA	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 19.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1p	Lif
15CP	-	6TPSMB15CA	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 28.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
15D0	-	SZ15D0	Zener diode	200V±5%, Zzt=1900Ω, Izt=4.7mA, 1W	DO-214AC	1d	1a	Eic
15D2	-	SZ15D2	Zener diode	220V±5%, Zzt=1600Ω, Izt=4.0mA, 1W	DO-214AC	1d	1a	Eic
15D4	-	SZ15D4	Zener diode	240V±5%, Zzt=1800Ω, Izt=3.8mA, 1W	DO-214AC	1d	1a	Eic
15D5	-	SZ15D5	Zener diode	250V±5%, Zzt=2000Ω, Izt=3.6mA, 1W	DO-214AC	1d	1a	Eic
15D7	-	SZ15D7	Zener diode	270V±5%, Zzt=2100Ω, Izt=3.3mA, 1W	DO-214AC	1d	1a	Eic
15E0	-	SZ15E0	Zener diode	300V±5%, Zzt=2300Ω, Izt=3.0mA, 1W	DO-214AC	1d	1a	Eic
15G	-	ZD15G-CA2	Zener diode	15V±5%, Zzt=42Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
15G	-	ZD15G-CB2	Zener diode	15V±5%, Zzt=42Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
15L	-	SS1P5L	Si-diode	SBR, 50V, 1A, Vf<0.59V(1A)	DO-220AA	8d	1k	Vs
15L	-	ZD15L-CA2	Zener diode	15V±5%, Zzt=42Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
15L	-	ZD15L-CB2	Zener diode	15V±5%, Zzt=42Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
15L7	-	KP15L07	Thy-SPD	V Of-St=65V, Ifsm=150A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
15L8	-	KP15L08	Thy-SPD	V Of-St=70V, Ifsm=150A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
15N12	-	KP15N12	Thy-SPD	V Of-St=110V, Ifsm=150A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
15N14	-	KP15N14	Thy-SPD	V Of-St=130V, Ifsm=150A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
15P	-	BZD27C15P	Zener diode	14.25..15.75V, Zzt=10Ω, Izt=50mA, 800mW	SOD-123FL	7d	1a	Pjt
15P	-	MFPZ15	Zener diode	14.25..15.75V, Izt=50mA, Zzt=10Ω, 800mW	SOD-123FL	7d	1a	Ttr
15R25	-	KP15R25	Thy-SPD	V Of-St=220V, Ifsm=150A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
15V	-	SMA15	TVS	Vbr=16.7..20.4V, Vrwm=15.0V, 11.2A, 300W(1ms)	DO-214AC	1d	1a	Mic
15V	-	SMB15	TVS	Vbr=16.7..20.4V, Vrwm=15V, 22.3A, 600W(1ms)	DO-214AA	1d	1a	Mic
15V	-	SMC15	TVS	Vbr=16.7..20.4V, Vrwm=15V, 55.8A, 1500W(1ms)	DO-214AB	1d	1a	Mic
15VA	-	SMA15A	TVS	Vbr=16.7..18.5V, Vrwm=15.0V, 12.3A, 300W(1ms)	DO-214AC	1d	1a	Mic
15VA	-	SMB15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, 24.6A, 600W(1ms)	DO-214AA	1d	1a	Mic
15VA	-	SMC15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, 61.5A, 1500W(1ms)	DO-214AB	1d	1a	Mic
15VB	-	BZT52B15	Zener diode	14.70..15.30V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tsc
15VB	-	MMSZ15VBW	Zener diode	14.70..15.30V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tac
15VC	-	SMA15C	TVS	Vbr=16.7..20.4V, Vrwm=15.0V, 11.2A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
15VC	-	SMB15C	TVS	Vbr=16.7..20.4V, Vrwm=15V, 22.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
15VC	-	SMC15C	TVS	Vbr=16.7..20.4V, Vrwm=15V, 55.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
15VCA	-	SMA15CA	TVS	Vbr=16.7..18.5V, Vrwm=15.0V, 12.3A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
15VCA	-	SMB15CA	TVS	Vbr=16.7..18.5V, Vrwm=15V, 24.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
15VCA	-	SMC15CA	TVS	Vbr=16.7..18.5V, Vrwm=15V, 61.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
15VZ	-	BZT52C15	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tsc
15VZ	-	MMSZ15VCW	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tac
15VZ	-	TCMMSZ15V	Zener diode	15V±5%, Izt=5mA, Zzt=28Ω, 500mW	SOD-123FL	7d	1a	Tac
15VZ	-	ZGFM0515C-MH	Zener diode	14.25..15.75V, Izt=5mA, Zzt=28Ω, 500mW	SOD-123	5d	1a	Pic
15W	-	SD15	TVS	Vrwm=15.0V, Vbr=16.7..24V, Ipp=15A, 500W(1ms)	SOD-323	5d	1a	Ldt
16	-	1SR154-600	Si-diode	Rectfier, 600V, 1A, Vf<1V(1A)	SOD-106	1d	1ka	Rhm
16	-	BZY55-C16	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 500mW	0805	70d	2d	Tsc
16	-	CDZ55C16	Zener diode	15.20..16.80V, Zzt=40Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
16	-	CDZ55C16S	Zener diode	15.20..16.80V, Zzt=40Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
16	-	CDZ55C16T	Zener diode	15.20..16.80V, Zzt=40Ω, Izt=5mA, 200mW	0603	70d	2d	Crp

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
16	-	CMZ16	Zener diode	16V±5%, Izt=10mA, 2W	M-FLAT	7d	1a	Tos
16	-	CTZ55C16	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 500mW	1206	70d	2d	Ctc
16	-	CZRNC55C16-G	Zener diode	15.20..16.80V, Zt=40Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
16	-	CZRSC55C16-G	Zener diode	15.20..16.80V, Zt=40Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
16	-	FM160-M	Si-diode	SBR, 60V, 1.0A, Vf<0.70V(1A)	SOD-123L	10d	1a	Tfr
16	-	KDZ16EV	Zener diode	15.3..17.1V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
16	-	KDZ16V	Zener diode	15.3..17.1V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
16	-	KDZ16VV	Zener diode	15.30..17.10V, Izt=5mA, Zzt=18Ω, 100mW	VSC	7d	1a	Kec
16	-	MAZ5160	Zener diode	15.3..17.1V, Zzt=10Ω(5mA), 500mW	MP2	11d	1a	Pan
16	-	MAZ81600H	Zener diode	16.26..17.1V, Zzt=50Ω(5mA), 150mW	SC-76	6d	1a	Pan
16	-	MAZS160	Zener diode	15.3..17.1V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
16	-	MAZY160	Zener diode	14.4..17.6V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
16	-	MSS1P6	Si-diode	SBR, 60V, 1A, Vf<0.68V(1A)	MicroSMP	8d	1k	Vs
16	-	P4SMA16	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 18.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
16	-	P6SMBJ16	TVS	Vrwm=16V, Vbr=14.4..17.6V, 26A, 600W(1ms)	DO-214AA	1d	1n	Lif
16	-	SMA3C16	Zener diode	16V±5%, Izt=47mA, Zzt<5.5Ω, 3W	DO-214AC	1d	1a	Exc
16	-	SMBG16	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms)	DO-215AA	5d	1a	Msc
16	-	SMD16APT	Si-diode	SBR, 60V, 1A, Vf<0.65V(1A)	SOD-123S	8d	1a	Chm
16	-	SML4745	Zener diode	16V±5%, Izt=15.5mA, Zzt=16Ω, 1W	DO-214AC	1d	1k	Vs
16	-	TZD16WS	Zener diode	15.30..17.10V, Izt=5mA, Zzt=18Ω, 200mW	SOD-323	5d	1a	Ttr
16	-	TZD16WT	Zener diode	15.30..17.10V, Izt=5mA, Zzt=18Ω, 150mW	SOD-523	6d	1a	Ttr
16	-	TZD16WU	Zener diode	15.85..16.51V, Izt=5mA, Zzt=50Ω, 100mW	SOD-723	7d	1a	Ttr
16	-	U1ZB16	Zener diode	14.4..17.6V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos
16	-	USFZ16V	Zener diode	16V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
16	ah	HZC16	Zener diode	16V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
16	ay	CRZ16	Zener diode	14.4..17.61V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
16-	-	MAZ81600L	Zener diode	15.7..16.5V, Zzt=50Ω(5mA), 150mW	SC-76	6d	1a	Pan
16-	-	MAZ8160GML	Zener diode	15.7..16.5V, Zzt=50Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
16-	-	MAZS1600M	Zener diode	15.7..16.5V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
16^	-	MAZ81600H	Zener diode	16.26..17.1V, Zzt=50Ω(5mA), 150mW	SC-76	6d	1a	Pan
16^	-	MAZ8160GHL	Zener diode	16.26..17.1V, Zzt=50Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
16^	-	MAZS1600H	Zener diode	16.26..17.1V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
16_	-	MAZ81600L	Zener diode	15.3..16.09V, Zzt=50Ω(5mA), 150mW	SC-76	6d	1a	Pan
16_	-	MAZ8160GLL	Zener diode	15.3..16.09V, Zzt=50Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
16_	-	MAZS1600L	Zener diode	15.3..16.09V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
16•	-	RKZ16B2KG	Zener diode	15.85..16.51V, Izt=5mA, Zzt=40Ω, 200mW	URP	5d	2e	Ren
16•	-	RKZ16B2KJ	Zener diode	15.85..16.51V, Izt=5mA, Zzt=40Ω, 150mW	UFP	7d	2e	Ren
16•	-	TZD16YWS	Zener diode	15.85..16.51V, Izt=5mA, Zzt=18Ω, 200mW	SOD-323	5d	1a	Ttr
16•	-	TZD16YWT	Zener diode	15.85..16.51V, Izt=5mA, Zzt=18Ω, 150mW	SOD-523	6d	1a	Ttr
16•	ai	HZU16B1	Zener diode	15.37..16.01V, Izt=5mA, Zzt=40Ω, 200mW	URP	5d	1a	Ren
16•	aj	HZU16B2	Zener diode	15.58..16.51V, Izt=5mA, Zzt=40Ω, 200mW	URP	5d	1a	Ren
16•	ak	HZU16B3	Zener diode	16.35..17.09V, Izt=5mA, Zzt=40Ω, 200mW	URP	5d	1a	Ren
160	-	MMF160A	TVS	Vrwm=160V, Vbr=178.0..205.0V, Ipp=0.7A, 200W(1ms)	SOD-123FL	7d	2m	Sst
160	-	P4SMA160	TVS	Vbr=144..176V, Vrwm=130V, 1.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
160	-	P6SMBJ160	TVS	Vrwm=160V, Vbr=144..176V, 2.6A, 600W(1ms)	DO-214AA	1d	1n	Lif
160	-	SMBG160	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms)	DO-215AA	5d	1a	Msc
160	-	SMF160A	TVS	Vbr=178..197V, Vrwm=160V, Ipp=0.7A, 200W(1ms)	SOD-123FL	7d	1a	Mco
160A	-	1.5SMC160A	TVS	Vrwm=136V, Vbr=152..168V, Ipp=6.8A, 1500W(1ms)	DO-214AB	1d	1b	Mde
160A	-	1.5SMC160A	TVS	Vrwm=136V, Vbr=152..168V, Ipp=6.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
160A	-	1.5SMC160A	TVS	Vrwm=136V, Vbr=152..168V, Ipp=6.8A, 1500W(1ms)	DO-214AB	1d	2s	Lif
160A	-	1SMC160A	TVS	Vbr=178..197V, Vrwm=160V, 5.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
160A	-	P4SMA160A	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
160A	-	P4SMA160A	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 400W(1ms)	DO-214AC	1d	1k	Vs
160A	-	P6SMB160A	TVS	Vrwm=160V, Vbr=152..168V, 2.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
160A	-	P6SMB160A	TVS	Vrwm=160V, Vbr=152..168V, 2.7A, 600W(1ms)	403A	3d	1s	Ons
160A	-	P6SMBJ160A	TVS	Vrwm=160V, Vbr=144..176V, 2.7A, 600W(1ms)	DO-214AA	1d	1n	Lif
160A	-	SMAJ160A	TVS	Vrwm=160V, Vbr=178..197V, 1.5A, 400W(1ms)	DO-214AC	1d	1a	Sus
160A	-	SMAJP4KE160A	TVS	Vrwm=136V, Vbr=152.0..168.0V, Ipp=1.9A, 400W(1ms)	DO-214AC	1d	1a	Mco
160A	-	SMBG160A	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms)	DO-215AA	5d	1a	Msc
160A	-	SMBJ160A	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms)	DO-214AA	1d	1a	Sus
160A	-	SMBJP6KE160A	TVS	Vrwm=136V, Vbr=152.0..168.0V, Ipp=2.8A, 600W(1ms)	DO-214AA	1d	1a	Mco
160A	-	SMCJ1.5KE160A	TVS	Vrwm=136V, Vbr=152.0..168.0V, Ipp=6.9A, 1500W(1ms)	DO-214AB	1d	1a	Mco
160A	-	SMCJ160A	TVS	Vrwm=160V, Vbr=178..218V, 5.2A, 1500W(1ms)	DO-214AB	1d	1k	Sus
160A	-	SZP6SMB160A	TVS	Vrwm=160V, Vbr=152..168V, 2.7A, 600W(1ms)	403A	3d	1s	Ons
160A	-	TSP160SA	Thy-SPD	V Of-St=160V, 50A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
160A	-	TVP04A161A-G	TVS	Vbr=152.0..168.0V, Vrwm=136V, Ipp=11.83A, 400W(1ms)	DO-214AC	1d	2o	Cmc
160A	-	TVP06B161A-G	TVS	Vrwm=136V, Vbr=152.0..168.0V, Ipp=2.74A, 600W(1ms)	DO-214AA	1d	2o	Cmc
160A	-	UMA160A	TVS	Vrwm=160V, Vbr=178..259V, 1.9A, 500W(1ms)	UltraMite	14d	1v	Msc
160B	-	1SMB3EZ160	Zener diode	160V±5%, Zzt=625Ω, Izt=4.7mA, 3W	DO-214AA	1d	1a	Pjt
160B	-	TSP160SB	Thy-SPD	V Of-St=160V, 80A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
160C	-	1.5SMC160CA	TVS	Vrwm=136V, Vbr=152..168V, Ipp=6.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
160C	-	1.5SMC160CA	TVS	Vrwm=136V, Vbr=152..168V, Ipp=6.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
160C	-	1.5SMC160CA	TVS	Vrwm=136V, Vbr=152..168V, Ipp=6.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
160C	-	MMF160CA	TVS	Vrwm=160V, Vbr=178.0..205.0V, Ipp=0.7A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
160C	-	P4SMA160C	TVS	Vbr=144..176V, Vrwm=130V, 1.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
160C	-	P4SMA160CA	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
160C	-	P6SMB160CA	TVS	Vrwm=160V, Vbr=152..168V, 2.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
160C	-	P6SMBJ160C	TVS	Vrwm=160V, Vbr=144..176V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
160C	-	SMAJP4KE160CA	TVS	Vrwm=136V, Vbr=152.0..168.0V, Ipp=1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
160C	-	SMBG160C	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
160C	-	SMBJP6KE160CA	TVS	Vrwm=136V, Vbr=152.0..168.0V, Ipp=2.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
160C	-	SMCJ1.5KE160CA	TVS	Vrwm=136V, Vbr=152.0..168.0V, Ipp=6.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
160C	-	SMF160CA	TVS	Vbr=178..197V, Vrwm=160V, Ipp=0.7A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
160C	-	TSP160SC	Thy-SPD	V Of-St=160V, 100A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
160C	-	TVP04A161CA-G	TVS	Vbr=152.0..168.0V, Vrwm=136V, Ipp=11.83A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
160C	-	TVP06B161ACA-G	TVS	Vrwm=136V, Vbr=152.0..168.0V, Ipp=2.74A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
160CA	-	1SMC160CA	TVS	Vbr=178..197V, Vrwm=160V, 5.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
160CA	-	P4SMA160CA	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
160CA	-	P6SMB160CA	TVS	Vbr=152..168V, Vrwm=136V, 2.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
160CA	-	P6SMBJ160CA	TVS	Vrwm=160V, Vbr=144..176V, 2.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
160CA	-	SMAJ160CA	TVS	Vrwm=160V, Vbr=178..197V, 1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
160CA	-	SMBG160CA	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
160CA	-	SMBJ160CA	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
160CA	-	SMCJ160CA	TVS	Vrwm=160V, Vbr=178..205V, 5.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
160CA	-	UMA160CA	TVS	Vrwm=160V, Vbr=178..259V, 1.9A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
160V	-	SMA160	TVS	Vbr=178..218V, Vrwm=160.0V, 1A, 300W(1ms)	DO-214AC	1d	1a	Mic
160V	-	SMB160	TVS	Vbr=178..218V, Vrwm=160V, 2.1A, 600W(1ms)	DO-214AA	1d	1a	Mic
160V	-	SMC160	TVS	Vbr=178..218V, Vrwm=160V, 5.2A, 1500W(1ms)	DO-214AB	1d	1a	Mic
160VA	-	SMA160A	TVS	Vbr=178..197V, Vrwm=160.0V, 1.2A, 300W(1ms)	DO-214AC	1d	1a	Mic
160VA	-	SMB160A	TVS	Vbr=178..197V, Vrwm=160V, 2.3A, 600W(1ms)	DO-214AA	1d	1a	Mic
160VA	-	SMC160A	TVS	Vbr=178..197V, Vrwm=160V, 5.8A, 1500W(1ms)	DO-214AB	1d	1a	Mic
160VC	-	SMA160C	TVS	Vbr=178..218V, Vrwm=160.0V, 1A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
160VC	-	SMB160C	TVS	Vbr=178..218V, Vrwm=160V, 2.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
160VC	-	SMC160C	TVS	Vbr=178..218V, Vrwm=160V, 5.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
160VCA	-	SMA160CA	TVS	Vbr=178..197V, Vrwm=160.0V, 1.2A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
160VCA	-	SMB160CA	TVS	Vbr=178..197V, Vrwm=160V, 2.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
160VCA	-	SMC160CA	TVS	Vbr=178..197V, Vrwm=160V, 5.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
160Z	-	1SMA160Z	Zener diode	160V±5%, Izt=1.6mA, Zzt=1100Ω, 1W	DO-214AC	1d	1a	Trs
160Z	-	Z1SMA160A	Zener diode	152.0..168.0V, Izt=1.6mA, 1W	SMA	1d	1ab	Ttr
161	-	HZU16-1L	Zener diode	15.3..15.9V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
162	-	HZU16-2L	Zener diode	15.7..16.5V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
163	-	HZU16-3L	Zener diode	16.3..17.1V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
167Z	-	BYD167	Si-diode	U-fast Rectifier, 600V, 1A, Vf<1.25V(1A), 35ns	1206	14d	1v	Zow
16A	-	1.5SMC16A	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, Ipp=67A, 1500W(1ms)	DO-214AB	1d	2s	Lif
16A	-	1.5SMC16A	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, Ipp=67A, 1500W(1ms)	DO-214AB	1d	1k	Vs
16A	-	1.5SMC16A	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, Ipp=67A, 1500W(1ms)	DO-214AB	1d	1b	Mde
16A	-	1.5SMC16A	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, Ipp=67A, 1500W(1ms)	403	3d	2t	Ons
16A	-	1SMC16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, 57.7A, 1500W(1ms)	DO-214AB	1d	1a	Eic
16A	-	MMF16A	TVS	Vrwm=16V, Vbr=17.8..20.5V, Ipp=7.7A, 200W(1ms)	SOD-123FL	7d	2m	Sst
16A	-	P4SMA16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19.0A, 400W(1ms)	DO-214AC	1d	1k	Vs
16A	-	P4SMA16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
16A	-	P6SMB16A	TVS	Vrwm=16V, Vbr=15.2..16.8V, 26.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
16A	-	P6SMB16A	TVS	Vrwm=16V, Vbr=15.2..16.8V, 26.7A, 600W(1ms)	403A	3d	1s	Ons
16A	-	P6SMBJ16A	TVS	Vrwm=16V, Vbr=14.4..17.6V, 27A, 600W(1ms)	DO-214AA	1d	1n	Lif
16A	-	RKZ16AKU	Zener diode	14.80..15.57V, Izt=10mA, Zzt=40Ω, 500mW	TURP-FM	7d	1a	Ren
16A	-	SMAJ16A	TVS	Vrwm=16V, Vbr=17.8..19.7V, 15.3A, 400W(1ms)	DO-214AC	1d	1a	Sus
16A	-	SMAJP4KE16A	TVS	Vrwm=13.60V, Vbr=15.20..16.80V, Ipp=18.2A, 400W(1ms)	DO-214AC	1d	1a	Mco
16A	-	SMBG16A	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms)	DO-215AA	5d	1a	Msc
16A	-	SMBJ16A	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms)	DO-214AA	1d	1a	Sus
16A	-	SMBJP6KE16A	TVS	Vrwm=13.60V, Vbr=15.20..16.80V, Ipp=27.1A, 600W(1ms)	DO-214AA	1d	1a	Mco
16A	-	SMCJ1.5KE16A	TVS	Vrwm=13.60V, Vbr=15.20..16.80V, Ipp=67.6A, 1500W(1ms)	DO-214AB	1d	1a	Mco
16A	-	SMCJ16A	TVS	Vrwm=16V, Vbr=17.8..20.5V, 52.1A, 1500W(1ms)	DO-214AB	1d	1k	Sus
16A	-	SMF16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, Ipp=7.7A, 200W(1ms)	SOD-123FL	7d	1a	Mco
16A	-	SZP6SMB16A	TVS	Vrwm=16V, Vbr=15.2..16.8V, 26.7A, 600W(1ms)	403A	3d	1s	Ons
16A	-	TVP04A160A-G	TVS	Vbr=15.20..16.80V, Vrwm=13.6V, Ipp=17.78A, 400W(1ms)	DO-214AC	1d	2o	Cmc
16A	-	TVP06B16A-G	TVS	Vrwm=13.6V, Vbr=15.20..16.80V, Ipp=26.67A, 600W(1ms)	DO-214AA	1d	2o	Cmc
16A	-	UMA16A	TVS	Vrwm=16V, Vbr=17.8..26.0V, 19.2A, 500W(1ms)	UltraMite	14d	1v	Msc
16AP	-	15TPSMC16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 67.6A, 1500W(1ms)	DO-214AB	1d	1p	Lif
16AP	-	4TPSMA16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 18.2A, 400W(1ms)	DO-214AC	1d	1p	Lif
16AP	-	6TPSMB16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 27.1A, 600W(1ms)	DO-214AA	1d	1p	Lif

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
16B	-	1SMB3EZ16	Zener diode	16V±5%, Zzt=8Ω, Izt=47.0mA, 3W	DO-214AA	1d	1a	Pjt
16B	-	HZF16BP	Zener diode	16V±5%, Iz=20mA, 900mW	LRP	1d	2f	Ren
16B	-	PTZ16B	Zener diode	16V±10%, Izt=20mA, 1W	DO-214AC	1d	1a	Rhm
16B	-	RKZ16BKU	Zener diode	15.25..16.04V, Izt=10mA, Zzt=40Ω, 500mW	TURP-FM	7d	1a	Ren
16B	-	SMAJ5916B	Zener diode	4.3V±5%, Izt=87.2mA, Zzt=6.0Ω, 1.5W	DO-214AC	1d	1a	Mco
16B	-	Z3SMB16B	Zener diode	15.20..16.80V, Izt=47mA, Zzt=6Ω, 3W	DO-214AA	1d	1a	Ttr
16C	-	1.5SMC16CA	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, Ipp=67A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
16C	-	1.5SMC16CA	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, Ipp=67A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
16C	-	1.5SMC16CA	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, Ipp=67A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
16C	-	HZF16CP	Zener diode	16V±10%, Iz=20mA, 900mW	LRP	1d	2f	Ren
16C	-	P4SMA16C	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 18.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
16C	-	P4SMA16CA	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
16C	-	P6SMB16CA	TVS	Vrwm=16V, Vbr=15.2..16.8V, 26.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
16C	-	P6SMBJ16C	TVS	Vrwm=16V, Vbr=14.4..17.6V, 26A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
16C	-	RKZ16CKU	Zener diode	15.69..16.51V, Izt=10mA, Zzt=40Ω, 500mW	TURP-FM	7d	1a	Ren
16C	-	SMAJP4KE16CA	TVS	Vrwm=13.60V, Vbr=15.20..16.80V, Ipp=18.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
16C	-	SMBG16C	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
16C	-	SMBJP6KE16CA	TVS	Vrwm=13.60V, Vbr=15.20..16.80V, Ipp=27.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
16C	-	SMCJ1.5KE16CA	TVS	Vrwm=13.60V, Vbr=15.20..16.80V, Ipp=67.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
16C	-	TVP04A160CA-G	TVS	Vbr=15.20..16.80V, Vrwm=13.6V, Ipp=17.78A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
16C	-	TVP06B16ACA-G	TVS	Vrwm=13.6V, Vbr=15.20..16.80V, Ipp=26.67A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
16CA	-	1SMC16CA	TVS	Vbr=17.8..19.7V, Vrwm=16V, 57.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
16CA	-	MMF16CA	TVS	Vrwm=16V, Vbr=17.8..20.5V, Ipp=7.7A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
16CA	-	P4SMA16CA	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
16CA	-	P6SMB16CA	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 27.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
16CA	-	P6SMBJ16CA	TVS	Vrwm=16V, Vbr=14.4..17.6V, 27A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
16CA	-	SMAJ16CA	TVS	Vrwm=16V, Vbr=17.8..19.7V, 15.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
16CA	-	SMBG16CA	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
16CA	-	SMBJ16CA	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
16CA	-	SMCJ16CA	TVS	Vrwm=16V, Vbr=17.8..19.7V, 52.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
16CA	-	SMF16CA	TVS	Vbr=17.8..19.7V, Vrwm=16V, Ipp=7.7A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
16CA	-	UMA16CA	TVS	Vrwm=16V, Vbr=17.8..26.0V, 19.2A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
16CP	-	15TPSMC16CA	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 67.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
16CP	-	4TPSMA16CA	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 18.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1p	Lif
16CP	-	6TPSMB16CA	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 27.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
16G	-	ZD16G-CA2	Zener diode	16V±5%, Zzt=50Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
16G	-	ZD16G-CB2	Zener diode	16V±5%, Zzt=50Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
16L	-	SS1P6L	Si-diode	SBR, 60V, 1A, Vf<0.59V(1A)	DO-220AA	8d	1k	Vs
16L	-	ZD16L-CA2	Zener diode	16V±5%, Zzt=50Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
16L	-	ZD16L-CB2	Zener diode	16V±5%, Zzt=50Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
16P	-	BZD27C16P	Zener diode	15.20..16.80V, Zzt=15Ω, Izt=25mA, 800mW	SOD-123FL	7d	1a	Pjt
16P	-	MFPZ16	Zener diode	15.2..16.8V, Izt=25mA, Zzt=12Ω, 800mW	SOD-123FL	7d	1a	Ttr
16V	-	SMA16	TVS	Vbr=17.8..21.8V, Vrwm=16.0V, 10.4A, 300W(1ms)	DO-214AC	1d	1a	Mic
16V	-	SMB16	TVS	Vbr=17.8..21.8V, Vrwm=16V, 20.8A, 600W(1ms)	DO-214AA	1d	1a	Mic
16V	-	SMC16	TVS	Vbr=17.8..21.8V, Vrwm=16V, 52.1A, 1500W(1ms)	DO-214AB	1d	1a	Mic
16VA	-	SMA16A	TVS	Vbr=17.8..19.7V, Vrwm=16.0V, 11.5A, 300W(1ms)	DO-214AC	1d	1a	Mic
16VA	-	SMB16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, 23.1A, 600W(1ms)	DO-214AA	1d	1a	Mic
16VA	-	SMC16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, 57.7A, 1500W(1ms)	DO-214AB	1d	1a	Mic
16VB	-	BZT52B16	Zener diode	15.68..16.32V, Izt=5mA, Zzt=40Ω, 500mW	SOD-123FL	7d	1a	Tsc
16VB	-	MMSZ16VBW	Zener diode	15.68..16.32V, Izt=5mA, Zzt=40Ω, 500mW	SOD-123FL	7d	1a	Tac
16VC	-	SMA16C	TVS	Vbr=17.8..21.8V, Vrwm=16.0V, 10.4A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
16VC	-	SMB16C	TVS	Vbr=17.8..21.8V, Vrwm=16V, 20.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
16VC	-	SMC16C	TVS	Vbr=17.8..21.8V, Vrwm=16V, 52.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
16VCA	-	SMA16CA	TVS	Vbr=17.8..19.7V, Vrwm=16.0V, 11.5A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
16VCA	-	SMB16CA	TVS	Vbr=17.8..19.7V, Vrwm=16V, 23.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
16VCA	-	SMC16CA	TVS	Vbr=17.8..19.7V, Vrwm=16V, 57.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
16VZ	-	BZT52C16	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 500mW	SOD-123FL	7d	1a	Tsc
16VZ	-	MMSZ16VCW	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 500mW	SOD-123FL	7d	1a	Tac
16VZ	-	TCMMSZ16V	Zener diode	16V±5%, Izt=5mA, Zzt=37Ω, 500mW	SOD-123FL	7d	1a	Tac
16VZ	-	ZGFM0516C-MH	Zener diode	15.20..16.80V, Izt=5mA, Zzt=37Ω, 500mW	SOD-123	5d	1a	Pic
17	-	P4SMA17	TVS	Vbr=15.3..18.7V, Vrwm=13.7V, 17.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
17	-	SMA3C17	Zener diode	17V±5%, Izt=44mA, Zzt<6Ω, 3W	DO-214AC	1d	1a	Exc
17	-	SMBG17	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms)	DO-215AA	5d	1a	Msc
170	-	MMF170A	TVS	Vrwm=170V, Vbr=189.0..217.5V, Ipp=0.6A, 200W(1ms)	SOD-123FL	7d	2m	Sst
170	-	P4SMA170	TVS	Vbr=153..187V, Vrwm=138V, 1.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
170	-	P6SMBJ170	TVS	Vrwm=170V, Vbr=153..187V, 2.5A, 600W(1ms)	DO-214AA	1d	1n	Lif
170	-	SMBG170	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms)	DO-215AA	5d	1a	Msc
170	-	SMF170A	TVS	Vbr=189..209V, Vrwm=170V, Ipp=0.6A, 200W(1ms)	SOD-123FL	7d	1a	Mco
170A	-	1.5SMC170A	TVS	Vrwm=145V, Vbr=162..179V, Ipp=6.4A, 1500W(1ms)	DO-214AB	1d	2s	Lif
170A	-	1.5SMC170A	TVS	Vrwm=145V, Vbr=162..179V, Ipp=6.4A, 1500W(1ms)	DO-214AB	1d	1k	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
170A	-	1.5SMC170A	TVS	Vrwm=145V, Vbr=162..179V, Ipp=6.4A, 1500W(1ms)	DO-214AB	1d	1b	Mde
170A	-	1SMC170A	TVS	Vbr=189..209V, Vrwm=170V, 5.50A, 1500W(1ms)	DO-214AB	1d	1a	Eic
170A	-	P4SMA170A	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
170A	-	P4SMA170A	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 400W(1ms)	DO-214AC	1d	1k	Vs
170A	-	P6SMB170A	TVS	Vrwm=170V, Vbr=162..179V, 2.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
170A	-	P6SMBJ170A	TVS	Vrwm=170V, Vbr=153..187V, 2.6A, 600W(1ms)	DO-214AA	1d	1n	Lif
170A	-	SMAJ170A	TVS	Vrwm=170V, Vbr=189..209V, 1.5A, 400W(1ms)	DO-214AC	1d	1a	Sus
170A	-	SMAJP4KE170A	TVS	Vrwm=145V, Vbr=162.0..179.0V, Ipp=1.8A, 400W(1ms)	DO-214AC	1d	1a	Mco
170A	-	SMBG170A	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms)	DO-215AA	5d	1a	Msc
170A	-	SMBJ170A	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms)	DO-214AA	1d	1a	Sus
170A	-	SMBJP6KE170A	TVS	Vrwm=145V, Vbr=162.0..179.0V, Ipp=2.6A, 600W(1ms)	DO-214AA	1d	1a	Mco
170A	-	SMCJ1.5KE170A	TVS	Vrwm=145V, Vbr=162.0..179.0V, Ipp=6.5A, 1500W(1ms)	DO-214AB	1d	1a	Mco
170A	-	SMCJ170A	TVS	Vrwm=170V, Vbr=189..217V, 4.9A, 1500W(1ms)	DO-214AB	1d	1k	Sus
170A	-	TVP04A171A-G	TVS	Vbr=161.50..178.50V, Vrwm=145V, Ipp=1.71A, 400W(1ms)	DO-214AC	1d	2o	Cmc
170A	-	TVP06B171A-G	TVS	Vrwm=145V, Vbr=161.50..178.50V, Ipp=2.56A, 600W(1ms)	DO-214AA	1d	2o	Cmc
170A	-	UMA170A	TVS	Vrwm=170V, Vbr=189..275V, 1.8A, 500W(1ms)	UltraMite	14d	1v	Msc
170B	-	1SMB3EZ170	Zener diode	170V±5%, Zzt=650Ω, Izt=4.4mA, 3W	DO-214AA	1d	1a	Pjt
170C	-	1.5SMC170CA	TVS	Vrwm=145V, Vbr=162..179V, Ipp=6.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
170C	-	1.5SMC170CA	TVS	Vrwm=145V, Vbr=162..179V, Ipp=6.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
170C	-	1.5SMC170CA	TVS	Vrwm=145V, Vbr=162..179V, Ipp=6.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
170C	-	MMF170CA	TVS	Vrwm=170V, Vbr=189.0..217.5V, Ipp=0.6A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
170C	-	P4SMA170C	TVS	Vbr=153..187V, Vrwm=138V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
170C	-	P4SMA170CA	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
170C	-	P6SMB170CA	TVS	Vrwm=170V, Vbr=162..179V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
170C	-	P6SMBJ170C	TVS	Vrwm=170V, Vbr=153..187V, 2.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
170C	-	SMAJP4KE170CA	TVS	Vrwm=145V, Vbr=162.0..179.0V, Ipp=1.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
170C	-	SMBG170C	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
170C	-	SMBJP6KE170CA	TVS	Vrwm=145V, Vbr=162.0..179.0V, Ipp=2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
170C	-	SMCJ1.5KE170CA	TVS	Vrwm=145V, Vbr=162.0..179.0V, Ipp=6.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
170C	-	SMF170CA	TVS	Vbr=189..209V, Vrwm=170V, Ipp=0.6A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
170C	-	TVP04A171CA-G	TVS	Vbr=161.50..178.50V, Vrwm=145V, Ipp=1.71A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
170C	-	TVP06B171ACA-G	TVS	Vrwm=145V, Vbr=161.50..178.50V, Ipp=2.56A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
170CA	-	1SMC170CA	TVS	Vbr=189..209V, Vrwm=170V, 5.50A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
170CA	-	P4SMA170CA	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
170CA	-	P6SMB170CA	TVS	Vbr=162..179V, Vrwm=145V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
170CA	-	P6SMBJ170CA	TVS	Vrwm=170V, Vbr=153..187V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
170CA	-	SMAJ170CA	TVS	Vrwm=170V, Vbr=189..209V, 1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
170CA	-	SMBG170CA	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
170CA	-	SMBJ170CA	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
170CA	-	SMCJ170CA	TVS	Vrwm=170V, Vbr=189..217V, 4.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
170CA	-	UMA170CA	TVS	Vrwm=170V, Vbr=189..275V, 1.8A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
170V	-	SMA170	TVS	Vbr=189..231V, Vrwm=170.0V, 0.99A, 300W(1ms)	DO-214AC	1d	1a	Mic
170V	-	SMB170	TVS	Vbr=189..231V, Vrwm=170V, 2A, 600W(1ms)	DO-214AA	1d	1a	Mic
170V	-	SMC170	TVS	Vbr=189..231V, Vrwm=170V, 4.9A, 1500W(1ms)	DO-214AB	1d	1a	Mic
170VA	-	SMA170A	TVS	Vbr=189..209V, Vrwm=170.0V, 1.09A, 300W(1ms)	DO-214AC	1d	1a	Mic
170VA	-	SMB170A	TVS	Vbr=189..209V, Vrwm=170V, 2.2A, 600W(1ms)	DO-214AA	1d	1a	Mic
170VA	-	SMC170A	TVS	Vbr=189..209V, Vrwm=170V, 5.5A, 1500W(1ms)	DO-214AB	1d	1a	Mic
170VC	-	SMA170C	TVS	Vbr=189..231V, Vrwm=170.0V, 0.99A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
170VC	-	SMB170C	TVS	Vbr=189..231V, Vrwm=170V, 2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
170VC	-	SMC170C	TVS	Vbr=189..231V, Vrwm=170V, 4.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
170VCA	-	SMA170CA	TVS	Vbr=189..209V, Vrwm=170.0V, 1.09A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
170VCA	-	SMB170CA	TVS	Vbr=189..209V, Vrwm=170V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
170VCA	-	SMC170CA	TVS	Vbr=189..209V, Vrwm=170V, 5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
175A	-	TSP275SA	Thy-SPD	V Of-St=275V, 50A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
175B	-	TSP275SB	Thy-SPD	V Of-St=275V, 80A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
175C	-	TSP275SC	Thy-SPD	V Of-St=275V, 100A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
17A	-	1SMC17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, 54.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
17A	-	MMF17A	TVS	Vrwm=17V, Vbr=18.9..21.7V, Ipp=7.2A, 200W(1ms)	SOD-123FL	7d	2m	Sst
17A	-	P4SMA17A	TVS	Vbr=16.2..17.9V, Vrwm=14.5V, 18.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
17A	-	SMAJ17A	TVS	Vrwm=17V, Vbr=18.9..20.9V, 14.5A, 400W(1ms)	DO-214AC	1d	1a	Sus
17A	-	SMBG17A	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms)	DO-215AA	5d	1a	Msc
17A	-	SMBJ17A	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms)	DO-214AA	1d	1a	Sus
17A	-	SMCJ17A	TVS	Vrwm=17V, Vbr=18.9..21.7V, 49.2A, 1500W(1ms)	DO-214AB	1d	1k	Sus
17A	-	SMF17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, Ipp=7.2A, 200W(1ms)	SOD-123FL	7d	1a	Mco
17A	-	UMA17A	TVS	Vrwm=17V, Vbr=18.9..27.6V, 18.1A, 500W(1ms)	UltraMite	14d	1v	Msc
17AV	-	SMB17A	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms)	DO-214AA	1d	1a	Mic
17B	-	1SMB3EZ17	Zener diode	17V±5%, Zzt=9Ω, Izt=44.0mA, 3W	DO-214AA	1d	1a	Pjt
17B	-	SMAJ5917B	Zener diode	4.7V±5%, Izt=79.8mA, Zzt=5.0Ω, 1.5W	DO-214AC	1d	1a	Mco
17B	-	Z3SMB17B	Zener diode	16.15..17.85V, Izt=44mA, Zzt=6Ω, 3W	DO-214AA	1d	1a	Ttr
17C	-	BZT52C17WS	Zener diode	16.15..17.85V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
17C	-	BZT52C17WT	Zener diode	16.15..17.85V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523	6d	1a	Ttr
17C	-	BZX584C17	Zener diode	16.15..17.85V, Izt=5mA, Zzt=45Ω, 200mW	SOD-523	7d	1a	Pjt
17C	-	P4SMA17C	TVS	Vbr=15.3..18.7V, Vrwm=13.7V, 17.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
17C	-	SMBG17C	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
17CA	-	1SMC17CA	TVS	Vbr=18.9..20.9V, Vrwm=17V, 54.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
17CA	-	MMF17CA	TVS	Vrwm=17V, Vbr=18.9..21.7V, Ipp=7.2A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
17CA	-	P4SMA17CA	TVS	Vbr=16.2..17.9V, Vrwm=14.5V, 18.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
17CA	-	SMAJ17CA	TVS	Vrwm=17V, Vbr=18.9..20.9V, 14.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
17CA	-	SMBG17CA	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
17CA	-	SMBJ17CA	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
17CA	-	SMCJ17CA	TVS	Vrwm=17V, Vbr=18.9..21.7V, 49.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
17CA	-	SMF17CA	TVS	Vbr=18.9..20.9V, Vrwm=17V, Ipp=7.2A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
17CA	-	UMA17CA	TVS	Vrwm=17V, Vbr=18.9..27.6V, 18.1A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
17P	-	BZD27C17P	Zener diode	16.15..17.85V, Zzt=15Ω, Izt=25mA, 800mW	SOD-123FL	7d	1a	Pjt
17P	-	MFPZ17	Zener diode	16.15..17.85V, Izt=25mA, Zzt=12Ω, 800mW	SOD-123FL	7d	1a	Ttr
17V	-	SMA17	TVS	Vbr=18.9..12.1V, Vrwm=17.0V, 9.8A, 300W(1ms)	DO-214AC	1d	1a	Mic
17V	-	SMB17	TVS	Vbr=18.9..23.1V, Vrwm=17V, 19.7A, 600W(1ms)	DO-214AA	1d	1a	Mic
17V	-	SMC17	TVS	Vbr=18.9..23.1V, Vrwm=17V, 49.2A, 1500W(1ms)	DO-214AB	1d	1a	Mic
17VA	-	SMA17A	TVS	Vbr=18.9..20.9V, Vrwm=17.0V, 10.9A, 300W(1ms)	DO-214AC	1d	1a	Mic
17VA	-	SMB17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, 21.7A, 600W(1ms)	DO-214AA	1d	1a	Mic
17VA	-	SMC17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, 54.3A, 1500W(1ms)	DO-214AB	1d	1a	Mic
17VC	-	SMA17C	TVS	Vbr=18.9..12.1V, Vrwm=17.0V, 9.8A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
17VC	-	SMB17C	TVS	Vbr=18.9..23.1V, Vrwm=17V, 19.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
17VC	-	SMC17C	TVS	Vbr=18.9..23.1V, Vrwm=17V, 49.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
17VCA	-	SMA17CA	TVS	Vbr=18.9..20.9V, Vrwm=17.0V, 10.9A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
17VCA	-	SMB17CA	TVS	Vbr=18.9..20.9V, Vrwm=17V, 21.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
17VCA	-	SMC17CA	TVS	Vbr=18.9..20.9V, Vrwm=17V, 54.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
18	-	BZX384C33	Zener diode	31.0..35.0V, Izt=2.0mA, 200mW	SOD-323	5d	1a	Ttr
18	-	BZY55-C18	Zener diode	17.10..18.90V, Izt=5mA, Zzt=50Ω, 500mW	0805	70d	2d	Tsc
18	-	CDZ55C18	Zener diode	17.10..18.90V, Zzt=50Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
18	-	CDZ55C18S	Zener diode	17.10..18.90V, Zzt=50Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
18	-	CDZ55C18T	Zener diode	17.10..18.90V, Zzt=50Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
18	-	CMZ18	Zener diode	18V±5%, Izt=10mA, 2W	M-FLAT	7d	1a	Tos
18	-	CTZ55C18	Zener diode	17.10..18.90V, Izt=5mA, Zzt=50Ω, 500mW	1206	70d	2d	Ctc
18	-	CZRNC55C18-G	Zener diode	17.10..18.90V, Zt=50Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
18	-	CZRSC55C18-G	Zener diode	17.10..18.90V, Zt=50Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
18	-	FDZ33T	Zener diode	31..35V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Fis
18	-	FM180-M	Si-diode	SBR, 80V, 1.0A, Vf<0.85V(1A)	SOD-123L	10d	1a	Tfr
18	-	KDZ18EV	Zener diode	16.8..19.1V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
18	-	KDZ18V	Zener diode	16.80..19.10V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
18	-	KDZ18VV	Zener diode	16.80..19.10V, Izt=5mA, Zzt=20Ω, 100mW	VSC	7d	1a	Kec
18	-	LM3Z33VT1G	Zener diode	31..35V, Izt=2mA, 200mW	SOD-323	5d	1u	Lrc
18	-	LM5Z33VT1G	Zener diode	31..35V, Izt=2mA, 200mW	SOD-523	6d	1g	Lrc
18	-	MAZ5180	Zener diode	16.9..19.1V, Zzt=10Ω(5mA), 500mW	MP2	11d	1a	Pan
18	-	MAZ81800H	Zener diode	18.2..19.1V, Zzt=60Ω(5mA), 150mW	SC-76	6d	1a	Pan
18	-	MAZS180	Zener diode	16.9..19.1V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
18	-	MAZY180	Zener diode	16.2..19.8V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
18	-	MM3Z33V	Zener diode	31..35V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Sec
18	-	MM5Z33V	Zener diode	33V±5%, Izt=2mA, Zzt=80Ω, 200mW	SOD-523	6d	1u	Wtr
18	-	MMPZ5257BPT	Zener diode	31.35..34.65V, Izt=5mA, Zzt=88Ω, 225mW	SOD-323	5d	1a	Chm
18	-	P4SMA18	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 16.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
18	-	P6SMBJ18	TVS	Vrwm=18V, Vbr=16.2..19.8V, 23A, 600W(1ms)	DO-214AA	1d	1n	Lif
18	-	SMA3C18	Zener diode	18V±5%, Izt=42mA, Zzt<6Ω, 3W	DO-214AC	1d	1a	Exc
18	-	SMBG18	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms)	DO-215AA	5d	1a	Msc
18	-	SML4746	Zener diode	18V±5%, Izt=14mA, Zzt=20Ω, 1W	DO-214AC	1d	1k	Vs
18	-	TZD18WS	Zener diode	16.80..19.10V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Ttr
18	-	TZD18WT	Zener diode	16.80..19.10V, Izt=5mA, Zzt=20Ω, 150mW	SOD-523	6d	1a	Ttr
18	-	TZD18WU	Zener diode	17.56..18.35V, Izt=2mA, Zzt=65Ω, 100mW	SOD-723	7d	1a	Ttr
18	-	U1ZB18	Zener diode	16.2..19.8V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos
18	-	USFZ18V	Zener diode	18V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
18	-	ZD33V0	Zener diode	31..35V, 2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Cys
18	ah	HZC18	Zener diode	18V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
18	ay	CRZ18	Zener diode	16.2..19.83V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
18-	-	MAZ81800M	Zener diode	17.55..18.45V, Zzt=60Ω(5mA), 150mW	SC-76	6d	1a	Pan
18-	-	MAZ8180GML	Zener diode	17.55..18.45V, Zzt=60Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
18-	-	MAZS1800M	Zener diode	17.55..18.45V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
18^	-	MAZ81800H	Zener diode	18.2..19.1V, Zzt=60Ω(5mA), 150mW	SC-76	6d	1a	Pan
18^	-	MAZ8180GHL	Zener diode	18.2..19.1V, Zzt=60Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
18^	-	MAZS1800H	Zener diode	18.2..19.1V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
18_	-	MAZ81800M	Zener diode	16.9..17.76V, Zzt=60Ω(5mA), 150mW	SC-76	6d	1a	Pan

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
18_	-	MAZ8180GLL	Zener diode	16.9..17.76V, Zzt=60Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
18_	-	MAZS1800L	Zener diode	16.9..17.76V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
18•	-	RKZ18B2KG	Zener diode	17.56..18.35V, Izt=5mA, Zzt=45Ω, 200mW	URP	5d	2e	Ren
18•	-	RKZ18B2KJ	Zener diode	17.56..18.35V, Izt=5mA, Zzt=45Ω, 150mW	UFP	7d	2e	Ren
18•	-	TZD18YWS	Zener diode	17.56..18.35V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Ttr
18•	-	TZD18YWT	Zener diode	17.56..18.35V, Izt=5mA, Zzt=20Ω, 150mW	SOD-523	6d	1a	Ttr
18•	ai	HZU18B1	Zener diode	16.94..17.70V, Izt=5mA, Zzt=45Ω, 200mW	URP	5d	1a	Ren
18•	aj	HZU18B2	Zener diode	17.56..18.35V, Izt=5mA, Zzt=45Ω, 200mW	URP	5d	1a	Ren
18•	ak	HZU18B3	Zener diode	18.21..19.03V, Izt=5mA, Zzt=45Ω, 200mW	URP	5d	1a	Ren
180	-	MMF180A	TVS	Vrwm=180V, Vbr=198.0..230.4V, Ipp=0.6A, 200W(1ms)	SOD-123FL	7d	2m	Sst
180	-	P4SMA180	TVS	Vbr=162..198V, Vrwm=146V, 1.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
180	-	P6SMBJ180	TVS	Vrwm=180V, Vbr=162..198V, 2.3A, 600W(1ms)	DO-214AA	1d	1n	Lif
180	-	U1ZB180	Zener diode	162..198V, Izt=1.5mA, 1W	3-4D1A	1d	2fa	Tos
180A	-	1.5SMC180A	TVS	Vrwm=154V, Vbr=171..189V, Ipp=6.1A, 1500W(1ms)	DO-214AB	1d	2s	Lif
180A	-	1.5SMC180A	TVS	Vrwm=154V, Vbr=171..189V, Ipp=6.1A, 1500W(1ms)	DO-214AB	1d	1b	Mde
180A	-	1.5SMC180A	TVS	Vrwm=154V, Vbr=171..189V, Ipp=6.1A, 1500W(1ms)	DO-214AB	1d	1k	Vs
180A	-	P4SMA180A	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
180A	-	P4SMA180A	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 400W(1ms)	DO-214AC	1d	1k	Vs
180A	-	P6SMB180A	TVS	Vrwm=180V, Vbr=171 189V, 2.4A, 600W(1ms)	403A	3d	1s	Ons
180A	-	P6SMB180A	TVS	Vrwm=180V, Vbr=171 189V, 2.4A, 600W(1ms)	DO-214AA	1d	1k	Vs
180A	-	P6SMBJ180A	TVS	Vrwm=170V, Vbr=162..198V, 2.4A, 600W(1ms)	DO-214AA	1d	1n	Lif
180A	-	SMAJP4KE180A	TVS	Vrwm=154.0V, Vbr=171.0..189.0V, Ipp=1.7A, 400W(1ms)	DO-214AC	1d	1a	Mco
180A	-	SMBJP6KE180A	TVS	Vrwm=154.0V, Vbr=171.0..189.0V, Ipp=2.5A, 600W(1ms)	DO-214AA	1d	1a	Mco
180A	-	SMCJ1.5KE180A	TVS	Vrwm=154.0V, Vbr=171.0..189.0V, Ipp=6.2A, 1500W(1ms)	DO-214AB	1d	1a	Mco
180A	-	SZP6SMB180A	TVS	Vrwm=180V, Vbr=171 189V, 2.4A, 600W(1ms)	403A	3d	1s	Ons
180A	-	TVP04A181A-G	TVS	Vbr=171.0..189.0V, Vrwm=154.0V, Ipp=1.63A, 400W(1ms)	DO-214AC	1d	2o	Cmc
180A	-	TVP06B181A-G	TVS	Vrwm=154.0V, Vbr=171.0..189.0V, Ipp=2.44A, 600W(1ms)	DO-214AA	1d	2o	Cmc
180B	-	1SMB3EZ180	Zener diode	180V±5%, Zzt=700Ω, Izt=4.2mA, 3W	DO-214AA	1d	1a	Pjt
180C	-	1.5SMC180CA	TVS	Vrwm=154V, Vbr=171..189V, Ipp=6.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
180C	-	1.5SMC180CA	TVS	Vrwm=154V, Vbr=171..189V, Ipp=6.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
180C	-	1.5SMC180CA	TVS	Vrwm=154V, Vbr=171..189V, Ipp=6.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
180C	-	MMF180CA	TVS	Vrwm=180V, Vbr=198.0..230.4V, Ipp=0.6A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
180C	-	P4SMA180C	TVS	Vbr=162..198V, Vrwm=146V, 1.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
180C	-	P4SMA180CA	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
180C	-	P6SMB180CA	TVS	Vrwm=180V, Vbr=171 189V, 2.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
180C	-	P6SMBJ180C	TVS	Vrwm=180V, Vbr=162..198V, 2.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
180C	-	SMAJP4KE180CA	TVS	Vrwm=154.0V, Vbr=171.0..189.0V, Ipp=1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
180C	-	SMBJP6KE180CA	TVS	Vrwm=154.0V, Vbr=171.0..189.0V, Ipp=2.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
180C	-	SMCJ1.5KE180CA	TVS	Vrwm=154.0V, Vbr=171.0..189.0V, Ipp=6.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
180C	-	TVP04A181CA-G	TVS	Vbr=171.0..189.0V, Vrwm=154.0V, Ipp=1.63A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
180C	-	TVP06B181ACA-G	TVS	Vrwm=154.0V, Vbr=171.0..189.0V, Ipp=2.44A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
180CA	-	P4SMA180CA	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
180CA	-	P6SMB180CA	TVS	Vbr=171..189V, Vrwm=154V, 2.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
180CA	-	P6SMBJ180CA	TVS	Vrwm=180V, Vbr=162..198V, 2.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
180Z	-	1SMA180Z	Zener diode	180V±5%, Izt=1.4mA, Zzt=1200Ω, 1W	DO-214AC	1d	1a	Trs
180Z	-	Z1SMA180A	Zener diode	171.0..189.0V, Izt=1.4mA, 1W	SMA	1d	1ab	Ttr
181	-	HZU18-1L	Zener diode	16.9..17.7V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
182	-	HZU18-2L	Zener diode	17.5..18.3V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
183	-	HZU18-3L	Zener diode	18.1..19V, Izt=0.5mA, Zzt=80Ω, 150mW	URP	5d	1a	Ren
187Z	-	BYD187	Si-diode	U-fast Rectifier, 800V, 1A, Vf<2.5V(1A), 35ns	1206	14d	1v	Zow
188	-	SMBG188	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms)	DO-215AA	5d	1a	Msc
188A	-	1SMC188A	TVS	Vbr=209..231V, Vrwm=188V, 4.60A, 1500W(1ms)	DO-214AB	1d	1a	Eic
188A	-	SMAJ188A	TVS	Vrwm=188V, Vbr=209..231V, 1.4A, 400W(1ms)	DO-214AC	1d	1a	Sus
188A	-	SMBG188A	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms)	DO-215AA	5d	1a	Msc
188A	-	SMCJ188A	TVS	Vrwm=188V, Vbr=209..231V, 4.6A, 1500W(1ms)	DO-214AB	1d	1k	Sus
188C	-	SMBG188C	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
188CA	-	1SMC188CA	TVS	Vbr=209..231V, Vrwm=188V, 4.60A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
188CA	-	SMAJ188CA	TVS	Vrwm=188V, Vbr=209..231V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
188CA	-	SMBG188CA	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
188CA	-	SMCJ188CA	TVS	Vrwm=188V, Vbr=209..231V, 4.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
188V	-	SMB188	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms)	DO-214AA	1d	1a	Mic
188VA	-	SMB188A	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms)	DO-214AA	1d	1a	Mic
188VC	-	SMB188C	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
188VCA	-	SMB188CA	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
18A	-	1.5SMC18A	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, Ipp=59.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
18A	-	1.5SMC18A	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, Ipp=59.5A, 1500W(1ms)	DO-214AB	1d	2s	Lif
18A	-	1.5SMC18A	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, Ipp=59.5A, 1500W(1ms)	403	3d	2t	Ons
18A	-	1.5SMC18A	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, Ipp=59.5A, 1500W(1ms)	DO-214AB	1d	1b	Mde
18A	-	1SMC18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, 51.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
18A	-	MMF18A	TVS	Vrwm=18V, Vbr=20.0..23.3V, Ipp=6.8A, 200W(1ms)	SOD-123FL	7d	2m	Sst

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
18A	-	P1800SAA	Thy-SPD	Vdrm=160V, Vs=220V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Vs
18A	-	P4SMA18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
18A	-	P4SMA18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17.0A, 400W(1ms)	DO-214AC	1d	1k	Vs
18A	-	P6SMB18A	TVS	Vrwm=18V, Vbr=17.1..18.9V, 23.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
18A	-	P6SMB18A	TVS	Vrwm=18V, Vbr=17.1..18.9V, 23.8A, 600W(1ms)	403A	3d	1s	Ons
18A	-	P6SMBJ18A	TVS	Vrwm=18V, Vbr=16.2..19.8V, 24A, 600W(1ms)	DO-214AA	1d	1n	Lif
18A	-	RKZ18AKU	Zener diode	16.22..17.06V, Izt=10mA, Zzt=45Ω, 500mW	TURP-FM	7d	1a	Ren
18A	-	SMAJ18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, 13.7A, 400W(1ms)	DO-214AC	1d	1a	Sus
18A	-	SMAJP4KE18A	TVS	Vrwm=15.30V, Vbr=17.10..18.90V, Ipp=16.1A, 400W(1ms)	DO-214AC	1d	1a	Mco
18A	-	SMBG18A	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms)	DO-215AA	5d	1a	Msc
18A	-	SMBJ18A	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms)	DO-214AA	1d	1a	Sus
18A	-	SMBJP6KE18A	TVS	Vrwm=15.30V, Vbr=17.10..18.90V, Ipp=24.2A, 600W(1ms)	DO-214AA	1d	1a	Mco
18A	-	SMCJ1.5KE18A	TVS	Vrwm=15.30V, Vbr=17.10..18.90V, Ipp=60.3A, 1500W(1ms)	DO-214AB	1d	1a	Mco
18A	-	SMCJ18A	TVS	Vrwm=18V, Vbr=20..23.3V, 46.6A, 1500W(1ms)	DO-214AB	1d	1k	Sus
18A	-	SMF18A	TVS	Vbr=20...22.1V, Vrwm=18V, Ipp=6.8A, 200W(1ms)	SOD-123FL	7d	1a	Mco
18A	-	SZP6SMB18A	TVS	Vrwm=18V, Vbr=17.1..18.9V, 23.8A, 600W(1ms)	403A	3d	1s	Ons
18A	-	TVP04A180A-G	TVS	Vbr=17.10..18.90V, Vrwm=15.3V, Ipp=15.87A, 400W(1ms)	DO-214AC	1d	2o	Cmc
18A	-	TVP06B18A-G	TVS	Vrwm=15.3V, Vbr=17.10..18.90V, Ipp=23.81A, 600W(1ms)	DO-214AA	1d	2o	Cmc
18A	-	UMA18A	TVS	Vrwm=18V, Vbr=20.0..29.2V, 17.2A, 500W(1ms)	UltraMite	14d	1v	Msc
18AP	-	15TPSMC18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 60.3A, 1500W(1ms)	DO-214AB	1d	1p	Lif
18AP	-	4TPSMA18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 16.1A, 400W(1ms)	DO-214AC	1d	1p	Lif
18AP	-	6TPSMB18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 24.2A, 600W(1ms)	DO-214AA	1d	1p	Lif
18B	-	1SMB3EZ18	Zener diode	18V±5%, Zzt=10Ω, Izt=42.0mA, 3W	DO-214AA	1d	1a	Pjt
18B	-	HZF18BP	Zener diode	18V±5%, Iz=20mA, 900mW	LRP	1d	2f	Ren
18B	-	PTZ18B	Zener diode	18V±10%, Izt=20mA, 1W	DO-214AC	1d	1a	Rhm
18B	-	RKZ18BKU	Zener diode	16.82..17.70V, Izt=10mA, Zzt=45Ω, 500mW	TURP-FM	7d	1a	Ren
18B	-	SMAJ5918B	Zener diode	5.1V±5%, Izt=73.5mA, Zzt=4.0Ω, 1.5W	DO-214AC	1d	1a	Mco
18B	-	Z3SMB18B	Zener diode	17.10..18.90V, Izt=42mA, Zzt=6Ω, 3W	DO-214AA	1d	1a	Ttr
18C	-	1.5SMC18CA	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, Ipp=59.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
18C	-	1.5SMC18CA	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, Ipp=59.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
18C	-	1.5SMC18CA	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, Ipp=59.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
18C	-	HZF18CP	Zener diode	18V±10%, Iz=20mA, 900mW	LRP	1d	2f	Ren
18C	-	P4SMA18C	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 16.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
18C	-	P4SMA18CA	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
18C	-	P6SMB18CA	TVS	Vrwm=18V, Vbr=17.1..18.9V, 23.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
18C	-	P6SMBJ18C	TVS	Vrwm=18V, Vbr=16.2..19.8V, 23A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
18C	-	RKZ18CKU	Zener diode	17.42..18.33V, Izt=10mA, Zzt=45Ω, 500mW	TURP-FM	7d	1a	Ren
18C	-	SMAJP4KE18CA	TVS	Vrwm=15.30V, Vbr=17.10..18.90V, Ipp=16.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
18C	-	SMBG18C	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
18C	-	SMBJP6KE18CA	TVS	Vrwm=15.30V, Vbr=17.10..18.90V, Ipp=24.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
18C	-	SMCJ1.5KE18CA	TVS	Vrwm=15.30V, Vbr=17.10..18.90V, Ipp=60.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
18C	-	TVP04A180CA-G	TVS	Vbr=17.10..18.90V, Vrwm=15.3V, Ipp=15.87A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
18C	-	TVP06B18ACA-G	TVS	Vrwm=15.3V, Vbr=17.10..18.90V, Ipp=23.81A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
18CA	-	1SMC18CA	TVS	Vbr=20.0..22.1V, Vrwm=18V, 51.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
18CA	-	MMF18CA	TVS	Vrwm=18V, Vbr=20.0..23.3V, Ipp=6.8A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
18CA	-	P4SMA18CA	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
18CA	-	P6SMB18CA	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 24.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
18CA	-	P6SMBJ18CA	TVS	Vrwm=18V, Vbr=16.2..19.8V, 24A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
18CA	-	SMAJ18CA	TVS	Vrwm=18V, Vbr=20.0..22.1V, 13.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
18CA	-	SMBG18CA	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
18CA	-	SMBJ18CA	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
18CA	-	SMCJ18CA	TVS	Vrwm=18V, Vbr=20..23.3V, 46.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
18CA	-	SMF18CA	TVS	Vbr=20..22.1V, Vrwm=18V, Ipp=6.8A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
18CA	-	UMA18CA	TVS	Vrwm=18V, Vbr=20.0..29.2V, 17.2A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
18CP	-	15TPSMC18CA	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 60.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
18CP	-	4TPSMA18CA	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 16.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1p	Lif
18CP	-	6TPSMB18CA	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 24.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
18G	-	ZD18G-CA2	Zener diode	18V±5%, Zzt=65Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
18G	-	ZD18G-CB2	Zener diode	18V±5%, Zzt=65Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
18L	-	ZD18L-CA2	Zener diode	18V±5%, Zzt=65Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
18L	-	ZD18L-CB2	Zener diode	18V±5%, Zzt=65Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
18P	-	BZD27C18P	Zener diode	17.10..18.90V, Zzt=15Ω, Izt=25mA, 800mW	SOD-123FL	7d	1a	Pjt
18P	-	MFPZ18	Zener diode	17.1..18.9V, Izt=25mA, Zzt=12Ω, 800mW	SOD-123FL	7d	1a	Ttr
18V	-	SMA18	TVS	Vbr=20..24.4V, Vrwm=18.0V, 9.3A, 300W(1ms)	DO-214AC	1d	1a	Mic
18V	-	SMB18	TVS	Vbr=20..24.4V, Vrwm=18V, 18.6A, 600W(1ms)	DO-214AA	1d	1a	Mic
18V	-	SMC18	TVS	Vbr=20..24.4V, Vrwm=18V, 46.6A, 1500W(1ms)	DO-214AB	1d	1a	Mic
18VA	-	SMA18A	TVS	Vbr=20..22.1V, Vrwm=18.0V, 10.3A, 300W(1ms)	DO-214AC	1d	1a	Mic
18VA	-	SMB18A	TVS	Vbr=20..22.1V, Vrwm=18V, 20.5A, 600W(1ms)	DO-214AA	1d	1a	Mic
18VA	-	SMC18A	TVS	Vbr=20..22.1V, Vrwm=18V, 51.4A, 1500W(1ms)	DO-214AB	1d	1a	Mic
18VB	-	BZT52B18	Zener diode	17.64..18.36V, Izt=5mA, Zzt=45Ω, 500mW	SOD-123FL	7d	1a	Tsc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
18VB	-	MMSZ18VBW	Zener diode	17.64..18.36V, Izt=5mA, Zzt=45Ω, 500mW	SOD-123FL	7d	1a	Tac
18VC	-	SMA18C	TVS	Vbr=20..24.4V, Vrwm=18.0V, 9.3A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
18VC	-	SMB18C	TVS	Vbr=20..24.4V, Vrwm=18V, 18.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
18VC	-	SMC18C	TVS	Vbr=20..24.4V, Vrwm=18V, 46.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
18VCA	-	SMA18CA	TVS	Vbr=20..22.1V, Vrwm=18.0V, 10.3A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
18VCA	-	SMB18CA	TVS	Vbr=20..22.1V, Vrwm=18V, 20.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
18VCA	-	SMC18CA	TVS	Vbr=20..22.1V, Vrwm=18V, 51.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
18VZ	-	BZT52C18	Zener diode	17.10..18.90V, Izt=5mA, Zzt=45Ω, 500mW	SOD-123FL	7d	1a	Tsc
18VZ	-	MMSZ18VCW	Zener diode	17.10..18.90V, Izt=5mA, Zzt=45Ω, 500mW	SOD-123FL	7d	1a	Tac
18VZ	-	TCMMSZ18V	Zener diode	18V±5%, Izt=5mA, Zzt=42Ω, 500mW	SOD-123FL	7d	1a	Tac
18VZ	-	ZGFM0518C-MH	Zener diode	17.10..18.90V, Izt=5mA, Zzt=42Ω, 500mW	SOD-123	5d	1a	Pic
19	-	BZX384C36	Zener diode	34.0..38.0V, Izt=2.0mA, 200mW	SOD-323	5d	1a	Ttr
19	-	FDZ36T	Zener diode	34..38V, Izt=2mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Fis
19	-	LM3Z36VT1G	Zener diode	34..38V, Izt=2mA, 200mW	SOD-323	5d	1u	Lrc
19	-	LM5Z36VT1G	Zener diode	34..38V, Izt=2mA, 200mW	SOD-523	6d	1g	Lrc
19	-	MM3Z36V	Zener diode	34..38V, Izt=2mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Sec
19	-	MM5Z36V	Zener diode	36V±5%, Izt=2mA, Zzt=90Ω, 200mW	SOD-523	6d	1u	Wtr
19	-	MMPZ5258BPT	Zener diode	34.20..37.80V, Izt=5mA, Zzt=95Ω, 225mW	SOD-323	5d	1a	Chm
19	-	SMA3C19	Zener diode	19V±5%, Izt=40mA, Zzt<7Ω, 3W	DO-214AC	1d	1a	Exc
19	-	ZD36V0	Zener diode	34..38V, 2mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Cys
190	-	MMF190A	TVS	Vrwm=190V, Vbr=209.0..243.2V, Ipp=0.5A, 200W(1ms)	SOD-123FL	7d	2m	Sst
190A	-	TSP190SA	Thy-SPD	V Of-St=190V, 50A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
190B	-	1SMB3EZ190	Zener diode	190V±5%, Zzt=800Ω, Izt=4mA, 3W	DO-214AA	1d	1a	Pjt
190B	-	TSP190SB	Thy-SPD	V Of-St=190V, 80A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
190C	-	MMF190CA	TVS	Vrwm=190V, Vbr=209.0..243.2V, Ipp=0.5A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
190C	-	TSP190SC	Thy-SPD	V Of-St=190V, 100A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
19B	-	1SMB3EZ19	Zener diode	19V±5%, Zzt=11Ω, Izt=40.0mA, 3W	DO-214AA	1d	1a	Pjt
19B	-	SMAJ5919B	Zener diode	5.6V±5%, Izt=66.9mA, Zzt=2.0Ω, 1.5W	DO-214AC	1d	1a	Mco
19B	-	Z3SMB19B	Zener diode	18.05..19.95V, Izt=40mA, Zzt=7Ω, 3W	DO-214AA	1d	1a	Ttr
19P	-	BZD27C19P	Zener diode	18.05..19.95V, Zzt=15Ω, Izt=25mA, 800mW	SOD-123FL	7d	1a	Pjt
19P	-	MFPZ19	Zener diode	18.05..19.95V, Izt=25mA, Zzt=12Ω, 800mW	SOD-123FL	7d	1a	Ttr
1A	-	BZX384C47	Zener diode	44.0..50.0V, Izt=2.0mA, 200mW	SOD-323	5d	1a	Ttr
1A	-	FDZ47T	Zener diode	44..50V, Izt=2mA, Zzt=170Ω, 200mW	SOD-323	5d	1a	Fis
1A	-	FSSL12	Si-diode	SBR, 20V, 1A, Vf<0.39V(3A)	DO-214AC	1d	2j	Fag
1A	-	LM3Z47VT1G	Zener diode	44..50V, Izt=2mA, 200mW	SOD-323	5d	1u	Lrc
1A	-	LM5Z47VT1G	Zener diode	44..50V, Izt=1mA, 200mW	SOD-523	6d	1g	Lrc
1A	-	MA110	Si-diode	Fast-Sw, 40V, 100mA, <3ns	SOD-123	5d	1a	Pan
1A	-	MM3Z47V	Zener diode	44..50V, Izt=2mA, Zzt=170Ω, 200mW	SOD-323	5d	1a	Sec
1A	-	MM5Z47V	Zener diode	47V±5%, Izt=2mA, Zzt=170Ω, 200mW	SOD-523	6d	1u	Wtr
1A	-	MMPZ5261BPT	Zener diode	44.65..49.35V, Izt=2.7mA, Zzt=105Ω, 225mW	SOD-323	5d	1a	Chm
1A	-	ZD47V0	Zener diode	44..50V, 2mA, Zzt=170Ω, 200mW	SOD-323	5d	1a	Cys
1AD	-	SMB10J5.0	TVS	Vbr=6.40..7.82V, Vrwm=5.0V, 104.2A, 1000W(1ms)	DO-214AC	1d	1k	Vs
1AD	-	SMB8J5.0C	TVS	Vbr=6.40..7.82V, Vrwm=5.0V, 83.3A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AE	-	SMB10J5.0A	TVS	Vbr=6.40..7.07V, Vrwm=5.0V, 108.7A, 1000W(1ms)	DO-214AC	1d	1k	Vs
1AE	-	SMB8J5.0CA	TVS	Vbr=6.40..7.25V, Vrwm=5.0V, 87.0A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AF	-	SMB10J6.0	TVS	Vbr=6.67..8.15V, Vrwm=6.0V, 87.7A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AF	-	SMB8J6.0C	TVS	Vbr=6.67..8.15V, Vrwm=6.0V, 70.2A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AG	-	SMB10J6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 97.1A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AG	-	SMB8J6.0CA	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 77.7A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AH	-	SMB10J6.5	TVS	Vbr=7.22..8.82V, Vrwm=6.5V, 81.3A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AH	-	SMB8J6.5C	TVS	Vbr=7.22..8.82V, Vrwm=6.5V, 65.0A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AK	-	SMB10J6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 89.3A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AK	-	SMB8J6.5CA	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 71.4A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AL	-	SMB10J7.0	TVS	Vbr=7.78..9.51V, Vrwm=7.0V, 75.2A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AL	-	SMB8J7.0C	TVS	Vbr=7.78..9.51V, Vrwm=7.0V, 60.2A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AM	-	SMB10J7.0A	TVS	Vbr=7.78..8.60V, Vrwm=7.0V, 83.3A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AM	-	SMB8J7.0CA	TVS	Vbr=7.78..8.60V, Vrwm=7.0V, 66.7A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AN	-	SMB10J7.5	TVS	Vbr=8.33..10.2V, Vrwm=7.5V, 69.9A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AN	-	SMB8J7.5C	TVS	Vbr=8.33..10.2V, Vrwm=7.5V, 55.9A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AP	-	SMB10J7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 77.5A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AP	-	SMB8J7.5CA	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 62.0A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AQ	-	SMB10J8.0	TVS	Vbr=8.89..10.9V, Vrwm=8.0V, 66.7A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AQ	-	SMB8J8.0C	TVS	Vbr=8.89..10.9V, Vrwm=8.0V, 53.3A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AR	-	SMB10J8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 73.5A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AR	-	SMB8J8.0CA	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 58.8A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AS	-	SMB10J8.5	TVS	Vbr=9.44..11.5V, Vrwm=8.5V, 62.9A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AS	-	SMB8J8.5C	TVS	Vbr=9.44..11.5V, Vrwm=8.5V, 50.3A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AT	-	SMB10J8.5A	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 69.4A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AT	-	SMB8J8.5CA	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 55.6A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AU	-	SMB10J9.0	TVS	Vbr=10.0..12.2V, Vrwm=9.0V, 59.2A, 1000W(1ms)	DO-214AA	1d	1k	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
1AU	-	SMB8J9.0C	TVS	Vbr=10.0..12.2V, Vrwm=9.0V, 47.3A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AV	-	SMB10J9.0A	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 64.9A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AV	-	SMB8J9.0CA	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 51.9A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AW	-	SMB10J10	TVS	Vbr=11.1..13.6V, Vrwm=10V, 53.2A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AW	-	SMB8J10C	TVS	Vbr=11.1..13.6V, Vrwm=10V, 42.6A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AX	-	SMB10J10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, 58.8A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AX	-	SMB8J10CA	TVS	Vbr=11.1..12.3V, Vrwm=10V, 47.1A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AY	-	SMB10J11	TVS	Vbr=12.2..14.9V, Vrwm=11V, 49.8A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AY	-	SMB8J11C	TVS	Vbr=12.2..14.9V, Vrwm=11V, 39.8A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1AZ	-	SMB10J11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, 54.9A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1AZ	-	SMB8J11CA	TVS	Vbr=12.2..13.5V, Vrwm=11V, 44.0A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1B	-	FSSL13	Si-diode	SBR, 30V, 1A, Vf<0.39V(3A)	DO-214AC	1d	2j	Fag
1B	-	MA2J111	Si-diode	Fast sw, 80V, 100mA, Vf<1.2V(100mA), <3ns	S-Mini	9d	1j	Pan
1BD	-	SMB10J12	TVS	Vbr=13.3..16.3V, Vrwm=12V, 45.5A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BD	-	SMB8J12C	TVS	Vbr=13.3..16.3V, Vrwm=12V, 36.4A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BE	-	SMB10J12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, 50.3A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BE	-	SMB8J12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, 40.2A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BF	-	SMB10J13	TVS	Vbr=14.4..17.6V, Vrwm=13V, 42.0A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BF	-	SMB8J13C	TVS	Vbr=14.4..17.6V, Vrwm=13V, 33.6A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BG	-	SMB10J13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, 46.5A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BG	-	SMB8J13CA	TVS	Vbr=14.4..15.9V, Vrwm=13V, 37.2A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BH	-	SMB10J14	TVS	Vbr=15.6..19.1V, Vrwm=14V, 38.8A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BH	-	SMB8J14C	TVS	Vbr=15.6..19.1V, Vrwm=14V, 31.0A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BK	-	SMB10J14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, 43.1A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BK	-	SMB8J14CA	TVS	Vbr=15.6..17.2V, Vrwm=14V, 34.5A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BL	-	SMB10J15	TVS	Vbr=16.7..20.4V, Vrwm=15V, 37.2A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BL	-	SMB8J15C	TVS	Vbr=16.7..20.4V, Vrwm=15V, 29.7A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BL3	-	MBRS130	Si-diode	SBR, 30V, 1A, Vf=0.55V(1A)	SOD-323	5d	1a	Ons
1BM	-	SMB10J15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, 41.0A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BM	-	SMB8J15CA	TVS	Vbr=16.7..18.5V, Vrwm=15V, 32.8A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BN	-	SMB10J16	TVS	Vbr=17.8..21.8V, Vrwm=16V, 34.7A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BN	-	SMB8J16C	TVS	Vbr=17.8..21.8V, Vrwm=16V, 27.8A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BP	-	SMB10J16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, 38.5A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BP	-	SMB8J16CA	TVS	Vbr=17.8..19.7V, Vrwm=16V, 30.8A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BQ	-	SMB10J17	TVS	Vbr=18.9..23.1V, Vrwm=17V, 32.8A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BQ	-	SMB8J17C	TVS	Vbr=18.9..23.1V, Vrwm=17V, 26.2A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BR	-	SMB10J17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, 36.2A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BR	-	SMB8J17CA	TVS	Vbr=18.9..20.9V, Vrwm=17V, 29.0A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BS	-	SMB10J18	TVS	Vbr=20.0..24.4V, Vrwm=18V, 31.1A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BS	-	SMB8J18C	TVS	Vbr=20.0..24.4V, Vrwm=18V, 24.8A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BT	-	SMB10J18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, 34.2A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BT	-	SMB8J18CA	TVS	Vbr=20.0..22.1V, Vrwm=18V, 27.4A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BU	-	SMB10J20	TVS	Vbr=22.2..27.1V, Vrwm=20V, 27.9A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BU	-	SMB8J20C	TVS	Vbr=22.2..27.1V, Vrwm=20V, 22.3A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BV	-	SMB10J20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, 30.9A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BV	-	SMB8J20CA	TVS	Vbr=22.2..24.5V, Vrwm=20V, 24.7A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BW	-	SMB10J22	TVS	Vbr=24.4..29.8V, Vrwm=22V, 25.4A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BW	-	SMB8J22C	TVS	Vbr=24.4..29.8V, Vrwm=22V, 20.3A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BX	-	SMB10J22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, 28.2A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BX	-	SMB8J22CA	TVS	Vbr=24.4..26.9V, Vrwm=22V, 22.5A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BY	-	SMB10J24	TVS	Vbr=26.7..32.6V, Vrwm=24V, 23.3A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BY	-	SMB8J24C	TVS	Vbr=26.7..32.6V, Vrwm=24V, 18.6A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1BZ	-	SMB10J24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, 25.7A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1BZ	-	SMB8J24CA	TVS	Vbr=26.7..29.5V, Vrwm=24V, 20.6A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1C	-	BZX384C51	Zener diode	48.0..54.0V, Izt=2.0mA, 200mW	SOD-323	5d	1a	Ttr
1C	-	FDZ51T	Zener diode	48..54V, Izt=2mA, Zzt=180Ω, 200mW	SOD-323	5d	1a	Fis
1C	-	FSSL14	Si-diode	SBR, 40V, 1A, Vf<0.39V(3A)	DO-214AC	1d	2j	Fag
1C	-	GBLC18C	TVS	Vrwm=18V, 8A, 350W(1ms), 3pF, Bidir.	SOD-323	5ba	1e	Prt
1C	-	LM3Z51VT1G	Zener diode	48..54V, Izt=2mA, 200mW	SOD-323	5d	1u	Lrc
1C	-	LM5Z51VT1G	Zener diode	48..54V, Izt=1mA, 200mW	SOD-523	6d	1g	Lrc
1C	-	MA112	Si-diode	Fast sw, 40V, 200mA, Vf<1,1V(200mA), <10nS	SOD-323	5d	1a	Pan
1C	-	MM3Z2V4	Zener diode	2.28..2.56V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323FL	7d	1a	Lge
1C	-	MM3Z51V	Zener diode	48..54V, Izt=2mA, Zzt=180Ω, 200mW	SOD-323	5d	1a	Sec
1C	-	MM5Z51V	Zener diode	51V±5%, Izt=2mA, Zzt=180Ω, 200mW	SOD-523	6d	1u	Wtr
1C	-	MMPZ5262BPT	Zener diode	48.45..53.35V, Izt=2.5mA, Zzt=125Ω, 225mW	SOD-323	5d	1a	Chm
1C	-	STZ8024	Zener diode	2.28..2.6V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323	5d	1a	Jiy
1C	-	ZD51V0	Zener diode	48..54V, 2mA, Zzt=180Ω, 200mW	SOD-323	5d	1a	Cys
1C1	-	STZ8027A	Zener diode	2.5..2.75V, Izt=5mA, Zzt=110Ω, 300mW	SOD-323	5d	1a	Jiy
1CD	-	SMB10J26	TVS	Vbr=28.9..35.3V, Vrwm=26V, 21.5A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1CD	-	SMB8J26C	TVS	Vbr=28.9..35.3V, Vrwm=26V, 17.2A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
1CE	-	SMB10J26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, 23.8A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1CE	-	SMB8J26CA	TVS	Vbr=28.9..31.9V, Vrwm=26V, 19.0A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1CF	-	SMB10J28	TVS	Vbr=31.1..38.0V, Vrwm=28V, 20.0A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1CF	-	SMB8J28C	TVS	Vbr=31.1..38.0V, Vrwm=28V, 16.0A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1CG	-	SMB10J28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, 22.0A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1CG	-	SMB8J28CA	TVS	Vbr=31.1..34.4V, Vrwm=28V, 17.6A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1CH	-	SMB10J30	TVS	Vbr=33.3..40.7V, Vrwm=30V, 18.7A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1CH	-	SMB8J30C	TVS	Vbr=33.3..40.7V, Vrwm=30V, 15.0A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1CK	-	SMB10J30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, 20.7A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1CK	-	SMB8J30CA	TVS	Vbr=33.3..36.8V, Vrwm=30V, 16.5A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1CL	-	SMB10J33	TVS	Vbr=36.7..44.9V, Vrwm=33V, 16.9A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1CL	-	SMB8J33C	TVS	Vbr=36.7..44.9V, Vrwm=33V, 13.6A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1CM	-	SMB10J33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, 18.8A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1CM	-	SMB8J33CA	TVS	Vbr=36.7..40.6V, Vrwm=33V, 15.0A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1CN	-	SMB10J36	TVS	Vbr=40.0..48.9V, Vrwm=36V, 15.6A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1CN	-	SMB8J36C	TVS	Vbr=40.0..48.9V, Vrwm=36V, 12.4A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1CP	-	SMB10J36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, 17.2A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1CP	-	SMB8J36CA	TVS	Vbr=40.0..44.2V, Vrwm=36V, 13.8A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1CQ	-	SMB10J40	TVS	Vbr=44.4..54.3V, Vrwm=40V, 14.0A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1CQ	-	SMB8J40C	TVS	Vbr=44.4..54.3V, Vrwm=40V, 11.2A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1CR	-	SMB10J40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, 15.5A, 1000W(1ms)	DO-214AA	1d	1k	Vs
1CR	-	SMB8J40CA	TVS	Vbr=44.4..49.1V, Vrwm=40V, 12.4A, 1000W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
1D	-	1SS358PT	Si-diode	Sw, 90V, 100mA, Vf<1.2V(100mA), 4ns	SOD-323	5d	1a	Chm
1D	-	BZX384C56	Zener diode	52.0..60.0V, Izt=2.0mA, 200mW	SOD-323	5d	1a	Ttr
1D	-	FDZ56T	Zener diode	52..60V, Izt=2mA, Zzt=200Ω, 200mW	SOD-323	5d	1a	Fis
1D	-	FUS1A	Si-diode	U-fast Rec. Rect., 50V, 1.5A, Vf<1V(1A), 50ns	DO-214AC	1d	2j	Fag
1D	-	LM3Z56VT1G	Zener diode	52..60V, Izt=2mA, 200mW	SOD-323	5d	1u	Lrc
1D	-	LM5Z56VT1G	Zener diode	52..60V, Izt=1mA, 200mW	SOD-523	6d	1g	Lrc
1D	-	MA2J113	Si-diode	Fast sw, 80V, 200mA, Vf<1.1V(200mA), <10ns	S-Mini	9d	1j	Pan
1D	-	MM3Z2V7	Zener diode	2.5..2.9V, Izt=5mA, Zzt=110Ω, 300mW	SOD-323FL	7d	1a	Lge
1D	-	MM3Z56V	Zener diode	52..60V, Izt=2mA, Zzt=200Ω, 200mW	SOD-323	5d	1a	Sec
1D	-	MM5Z56V	Zener diode	56V±5%, Izt=2mA, Zzt=200Ω, 200mW	SOD-523	6d	1u	Wtr
1D	-	MMPZ5263BPT	Zener diode	53.20..58.80V, Izt=2.2mA, Zzt=150Ω, 225mW	SOD-323	5d	1a	Chm
1D	-	STZ8027	Zener diode	2.5..2.9V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323	5d	1a	Jiy
1D	-	ZD56V0	Zener diode	52..60V, 2mA, Zzt=200Ω, 200mW	SOD-323	5d	1a	Cys
1E	-	BZX384C62	Zener diode	58.0..66.0V, Izt=2.0mA, 200mW	SOD-323	5d	1a	Ttr
1E	-	FDZ62T	Zener diode	58..66V, Izt=2mA, Zzt=215Ω, 200mW	SOD-323	5d	1a	Fis
1E	-	FUS1B	Si-diode	U-fast Rec. Rect., 100V, 1.5A, Vf<1V(1A), 50ns	DO-214AC	1d	2j	Fag
1E	-	LM3Z62VT1G	Zener diode	58..66V, Izt=2mA, 200mW	SOD-323	5d	1u	Lrc
1E	-	LM5Z62VT1G	Zener diode	58..66V, Izt=1mA, 200mW	SOD-523	6d	1g	Lrc
1E	-	MM3Z3V0	Zener diode	2.8..3.2V, Izt=5mA, Zzt=120Ω, 300mW	SOD-323FL	7d	1a	Lge
1E	-	MM3Z62V	Zener diode	58..66V, Izt=2mA, Zzt=215Ω, 200mW	SOD-323	5d	1a	Sec
1E	-	MM5Z62V	Zener diode	62V±5%, Izt=2mA, Zzt=215Ω, 200mW	SOD-523	6d	1u	Wtr
1E	-	MMPZ5265BPT	Zener diode	58.90..65.10V, Izt=2mA, Zzt=185Ω, 225mW	SOD-323	5d	1a	Chm
1E	-	STZ8030	Zener diode	2.8..3.2V, Izt=5mA, Zzt=110Ω, 300mW	SOD-323	5d	1a	Jiy
1E	-	ZD62V0	Zener diode	58..66V, 2mA, Zzt=215Ω, 200mW	SOD-323	5d	1a	Cys
1E1	-	MBRM110E	Si-diode	SBR, 10V, 1A, Vf=0.45V(1A)	DO-216AA	4d	1h	Ons
1F	-	BZX384C68	Zener diode	64.0..72.0V, Izt=2.0mA, 200mW	SOD-323	5d	1a	Ttr
1F	-	FDZ68T	Zener diode	64..72V, Izt=2mA, Zzt=240Ω, 200mW	SOD-323	5d	1a	Fis
1F	-	FUS1D	Si-diode	U-fast Rec. Rect., 200V, 1.5A, Vf<1V(1A), 50ns	DO-214AC	1d	2j	Fag
1F	-	LM3Z68VT1G	Zener diode	64..72V, Izt=2mA, 200mW	SOD-323	5d	1u	Lrc
1F	-	LM5Z68VT1G	Zener diode	64..72V, Izt=1mA, 200mW	SOD-523	6d	1g	Lrc
1F	-	MAZD024	Zener diode	2.28..2.6V, Zzt=100Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
1F	-	MM3Z3V3	Zener diode	3.1..3.5V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323FL	7d	1a	Lge
1F	-	MM3Z68V	Zener diode	64..72V, Izt=2mA, Zzt=240Ω, 200mW	SOD-323	5d	1a	Sec
1F	-	MM5Z68V	Zener diode	68V±5%, Izt=2mA, Zzt=240Ω, 200mW	SOD-523	6d	1u	Wtr
1F	-	MMPZ5266BPT	Zener diode	64.60..71.40V, Izt=1.8mA, Zzt=230Ω, 225mW	SOD-323	5d	1a	Chm
1F	-	STZ8033	Zener diode	5 3.1..3.5V, Izt=5mA, Zzt=120Ω, 300mW	SOD-323	5d	1a	Jiy
1F	-	ZD68V0	Zener diode	64..72V, 2mA, Zzt=240Ω, 200mW	SOD-323	5d	1a	Cys
1F1	-	STZ8030A	Zener diode	2.8..3.05V, Izt=5mA, Zzt=120Ω, 300mW	SOD-323	5d	1a	Jiy
1G	-	BZX384C75	Zener diode	70.0..79.0V, Izt=2.0mA, 200mW	SOD-323	5d	1a	Ttr
1G	-	FDZ75T	Zener diode	70..79V, Izt=2mA, Zzt=255Ω, 200mW	SOD-323	5d	1a	Fis
1G	-	FUS1G	Si-diode	U-fast Rec. Rect., 400V, 1.5A, Vf<1.3V(1A), 50ns	DO-214AC	1d	2j	Fag
1G	-	LM3Z75VT1G	Zener diode	70..79V, Izt=2mA, 200mW	SOD-323	5d	1u	Lrc
1G	-	LM5Z75VT1G	Zener diode	70..79V, Izt=1mA, 200mW	SOD-523	6d	1g	Lrc
1G	-	MM3Z75V	Zener diode	70..79V, Izt=2mA, Zzt=255Ω, 200mW	SOD-323	5d	1a	Sec
1G	-	MM5Z75V	Zener diode	75V±5%, Izt=2mA, Zzt=255Ω, 200mW	SOD-523	6d	1u	Wtr
1G	-	MMPZ5267BPT	Zener diode	71.25..78.75V, Izt=1.7mA, Zzt=270Ω, 225mW	SOD-323	5d	1a	Chm
1G	-	ZD75V0	Zener diode	70..79V, 2mA, Zzt=255Ω, 200mW	SOD-323	5d	1a	Cys
1H	-	FUS1J	Si-diode	U-fast Rec. Rect., 600V, 1.5A, Vf<1.7V(1A), 75ns	DO-214AC	1d	2j	Fag

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
1H	-	MM3Z3V6	Zener diode	3.4..3.8V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323FL	7d	1a	Lge
1H	-	STZ8036	Zener diode	3.4..3.8V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Jiy
1I	-	FUS1K	Si-diode	U-fast Rec. Rect., 800V, 1.5A, Vf<1.7V(1A), 75ns	DO-214AC	1d	2j	Fag
1J	-	FUS1M	Si-diode	U-fast Rec. Rect., 1000V, 1.5A, Vf<1.7V(1A), 75ns	DO-214AC	1d	2j	Fag
1J	-	MM3Z3V9	Zener diode	3.7..4.1V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323FL	7d	1a	Lge
1J	-	STZ8039	Zener diode	3.7..4.1V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Jiy
1J1	-	STZ8033A	Zener diode	3.1..3.35V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Jiy
1K	-	FS2A	Si-diode	Rectifier, 50V, 1.5A, Vf<1.1V(1.5A), 4µs	DO-214AA	1d	2j	Fag
1K	-	MM3Z4V3	Zener diode	4.0..4.6V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323FL	7d	1a	Lge
1K	-	STZ8043	Zener diode	4..4..6V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Jiy
1L	-	FS2B	Si-diode	Rectifier, 100V, 1.5A, Vf<1.1V(1.5A), 4µs	DO-214AA	1d	2j	Fag
1L1	-	MBRM110	Si-diode	SBR, 10V, 1A, Vf=0.27V(1A)	DO-216AA	4d	1h	Ons
1M	-	FS2D	Si-diode	Rectifier, 200V, 1.5A, Vf<1.1V(1.5A), 4µs	DO-214AA	1d	2j	Fag
1M	-	MM3Z4V7	Zener diode	4.4..5.0V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323FL	7d	1a	Lge
1M	-	STZ8047	Zener diode	4.4..5V, Izt=5mA, Zzt=80Ω, 300mW	SOD-323	5d	1a	Jiy
1M1	-	STZ8036A	Zener diode	3.4..3.65V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Jiy
1N	-	FS2G	Si-diode	Rectifier, 400V, 1.5A, Vf<1.1V(1.5A), 4µs	DO-214AA	1d	2j	Fag
1N	-	MM3Z5V1	Zener diode	4.8..5.4V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323FL	7d	1a	Lge
1N	-	STZ8051	Zener diode	4.8..5.4V, Izt=5mA, Zzt=60Ω, 300mW	SOD-323	5d	1a	Jiy
1P	-	CMDZ18L	Zener diode	17.10..18.90V, Izt=0.5mA, Zzt=80Ω, 250mW	SOD-323	5d	1a	Cen
1P	-	FS2J	Si-diode	Rectifier, 600V, 1.5A, Vf<1.1V(1.5A), 4µs	DO-214AA	1d	2j	Fag
1P	-	MM3Z5V6	Zener diode	5.2..6.0V, Izt=5mA, Zzt=80Ω, 300mW	SOD-323FL	7d	1a	Lge
1P	-	STZ8056	Zener diode	5.3..6V, Izt=5mA, Zzt=40Ω, 300mW	SOD-323	5d	1a	Jiy
1Q	-	FS2K	Si-diode	Rectifier, 800V, 1.5A, Vf<1.1V(1.5A), 4µs	DO-214AA	1d	2j	Fag
1Q1	-	STZ8039A	Zener diode	3.7..3.97V, Izt=5mA, Zzt=13Ω, 300mW	SOD-323	5d	1a	Jiy
1R	-	FS2M	Si-diode	Rectifier, 1000V, 1.5A, Vf<1.1V(1.5A), 4µs	DO-214AA	1d	2j	Fag
1R	-	MM3Z6V2	Zener diode	5.8..6.6V, Izt=5mA, Zzt=50Ω, 300mW	SOD-323FL	7d	1a	Lge
1R	-	STZ8062	Zener diode	5.8..6.6V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Jiy
1S	-	M1F40WTG	Si-diode	Rectifier, 400V, 1A, Vf<1.1V(1A)	SOD-123W	7d	1ua	Fag
1T	-	M1F60WTG	Si-diode	Rectifier, 600V, 1A, Vf<1.1V(1A)	SOD-123W	7d	1ua	Fag
1T1	-	STZ8043A	Zener diode	4.03..4.26V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Jiy
1W	-	MM3Z56V	Zener diode	52..60V, Izt=2mA, Zzt=200Ω, 200mW	SOD-323	5d	1a	Sec
1W1	-	STZ8043C	Zener diode	4.31..4.54V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Jiy
1X	-	MM3Z6V8	Zener diode	6.4..7.2V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323FL	7d	1a	Lge
1X	-	STZ8068	Zener diode	6.4..7.2V, Izt=5mA, Zzt=20Ω, 300mW	SOD-323	5d	1a	Jiy
1Y	-	KDZ11VVY	Zener diode	10.76..11.22V, Izt=5mA, Zzt=15Ω, 100mW	VSC	7d	1a	Kec
1Y	-	MM3Z7V5	Zener diode	7.0..7.9V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323FL	7d	1a	Lge
1Y	-	STZ8075	Zener diode	7.0..7.9V, Izt=5mA, Zzt=20Ω, 300mW	SOD-323	5d	1a	Jiy
1Y1	-	STZ8047A	Zener diode	4.45..4.69V, Izt=5mA, Zzt=80Ω, 300mW	SOD-323	5d	1a	Jiy
1Z	-	BZT52B2V7S	Zener diode	2.65..2.75V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323FL	7d	1a	Tsc
1Z	-	MM3Z2V7B	Zener diode	2.65..2.75V, Zzt=94Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
1Z	-	MM3Z2V7BW	Zener diode	2.65..2.75V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323FL	7d	1a	Tac
1Z	-	MM3Z8V2	Zener diode	7.7..8.7V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323FL	7d	1a	Lge
1Z	-	STZ8082	Zener diode	7.7..8.7V, Izt=5mA, Zzt=20Ω, 300mW	SOD-323	5d	1a	Jiy
1Z	-	TCMM3Z2V7B	Zener diode	2.7V±2%, Izt=5mA, Zzt=94Ω, 200mW	SOD-323FL	7d	1a	Tac
2	-	1SV200	C-diode	VHF-tuning, 30V, 2.55/3.16pF(25V)	SOD-123	5d	1a	Hit
2	-	BB182	C-diode	TV-VHF-tuning, 32V, 20mA, 52..2.48pF(1..28V), 160MHz	SOD-523	6d	1a	Phi
2	-	CDZ55C2V0	Zener diode	1.90..2.10V, Zzt=85Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
2	-	CDZ55C2V0S	Zener diode	1.90..2.10V, Zzt=85Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
2	-	CDZ55C2V0T	Zener diode	1.90..2.10V, Zzt=85Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
2	-	CH520G-30PT	Si-diode	SBD, 30V, 200mA, Vf<0.6V(200mA)	SOD-723	8d	1a	Chm
2	-	CTZ55C2V0	Zener diode	1.90..2.10V, Izt=5mA, Zzt=85Ω, 500mW	1206	70d	2d	Ctc
2	-	CZRNC55C2V0-G	Zener diode	1.90..2.10V, Zt=85Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
2	-	GBLC12	TVS	Vrwm=12V, 11A, 350W(1ms), 3pF	SOD-323	5d	1a	Prt
2	-	HVC200A	C-diode	VHF-tuning, 32V, 2.67/27.7pF(25V..2V/1MHz)	UFP	6d	1b	Ren
2	-	HVR100	C-diode	AM-tuning, 15V, 421..28.2pF(1..8V)	SOD-123	5d	1a	Ren
2	-	MAZS027	Zener diode	2.5..2.9V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
2	-	MMPZ5223SPT	Zener diode	2.646..2.754V, Izt=5mA, Zzt=100Ω, 225mW	SOD-323	5d	1a	Chm
2	-	MMSZ5244BPT	Zener diode	14V±5%, Izt=9mA, Zzt=15Ω, 225mW	SOD-523	6d	1a	Chm
2	-	NZ9F13VST	Zener diode	12.91..13.49V, Izt=5mA, Zzt=37Ω, 200mW	SOD-923	7d	2m	Ons
2	-	NZ9F2V4ST	Zener diode	2.43..2.63V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1n	Ons
2	-	RB500V-40	Si-diode	SBR, 40V, 100mA, Vf<0.45V(10mA)	SOD-323	5d	1a	Rhm
2	-	SPE0572D72RG	ESDP-diode	Vrwm=5V, Vbr=6..8.5V, 7A, 250W(1ms), Bidir.	SOD-723	7ba	1a	Syn
2	au	CDZ4.3B	Zener diode	4.3V±2.5%, Izt=40mA, 1W	VMN	7d	1s	Rhm
2	az	BAR64-03W	PIN-diode	Sw, RF-att, 150V, 100mA, Vf<1.1V(50mA), < 0.35pF	SOD-323	5d	2	Inf
2	ba	BB419	C-diode	VHF-tuning, 28V, 20mA, Ir<0.02µA, Cv=26/32pF	SOD-123	5d	2	Sie
2	ba	BB439	C-diode	VHF-tuning, 28V, 20mA, Ir<0.02µA, Cv=26/32pF	SOD-323	5d	2	Sie
2.	-	MMSZ5244SPT	Zener diode	14V±5%, Izt=9mA, Zzt=15Ω, 225mW	SOD-523	6d	1a	Chm
2.0B	-	HZF2.0BP	Zener diode	2V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
2.0C	-	HZF2.0CP	Zener diode	2V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
2.2B	-	HZF2.2BP	Zener diode	2.2V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
2.2C	-	HZF2.2CP	Zener diode	2.2V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
2.4	-	MAZ8024	Zener diode	2.28..2.6V, Zzt=100Ω(5mA), 150mW	SC-76	6d	1a	Pan
2.4	-	MAZ8024G0L	Zener diode	2.28..2.6V, Zzt=100Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
2.4B	-	HZF2.4BP	Zener diode	2.4V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
2.4C	-	HZF2.4CP	Zener diode	2.4V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
2.4G	-	ZD2.4G-CA2	Zener diode	2.4V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
2.4G	-	ZD2.4G-CB2	Zener diode	2.4V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
2.4L	-	ZD2.4L-CA2	Zener diode	2.4V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
2.4L	-	ZD2.4L-CB2	Zener diode	2.4V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
2.5G	-	ZD2.5G-CA2	Zener diode	2.5V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
2.5G	-	ZD2.5G-CB2	Zener diode	2.5V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
2.5L	-	ZD2.5L-CA2	Zener diode	2.5V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
2.5L	-	ZD2.5L-CB2	Zener diode	2.5V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
2.7	-	MAZ80270H	Zener diode	2.65..2.9V, Zzt=110Ω(5mA), 150mW	SC-76	6d	1a	Pan
2.7B	-	HZF2.7BP	Zener diode	2.7V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
2.7C	-	HZF2.7CP	Zener diode	2.7V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
2^	-	MAZS0270H	Zener diode	2.65..2.9V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
2^7	-	MAZ80270H	Zener diode	2.65..2.9V, Zzt=110Ω(5mA), 150mW	SC-76	6d	1a	Pan
2^7	-	MAZ8027GHL	Zener diode	2.65..2.9V, Zzt=110Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
2_	-	MAZS0270L	Zener diode	2.5..2.75V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
2_7	-	MAZ80270L	Zener diode	2.5..2.75V, Zzt=110Ω(5mA), 150mW	SC-76	6d	1a	Pan
2_7	-	MAZ8027GLL	Zener diode	2.5..2.75V, Zzt=110Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
2•0	-	RKZ2.0BKG	Zener diode	1.90..2.20V, Izt=5mA, Zzt=100Ω, 200mW	URP	5d	2e	Ren
2•0	-	RKZ2.0BKJ	Zener diode	1.90..2.20V, Izt=5mA, Zzt=100Ω, 150mW	UFP	7d	2e	Ren
2•0	an	HZU2.0B	Zener diode	1.90..2.20V, Izt=5mA, Zzt=100Ω, 200mW	URP	5d	1a	Ren
2•2	-	RKZ2.2BKG	Zener diode	2.10..2.40V, Izt=5mA, Zzt=100Ω, 200mW	URP	5d	2e	Ren
2•2	-	RKZ2.2BKJ	Zener diode	2.10..2.40V, Izt=5mA, Zzt=100Ω, 150mW	UFP	7d	2e	Ren
2•2	an	HZU2.2B	Zener diode	2.10..2.40V, Izt=5mA, Zzt=100Ω, 200mW	URP	5d	1a	Ren
2•4	-	RKZ2.4BKG	Zener diode	2.30..2.60V, Izt=5mA, Zzt=100Ω, 200mW	URP	5d	2e	Ren
2•4	-	RKZ2.4BKJ	Zener diode	2.30..2.60V, Izt=5mA, Zzt=100Ω, 150mW	UFP	7d	2e	Ren
2•4	an	HZU2.4B	Zener diode	2.30..2.60V, Izt=5mA, Zzt=100Ω, 200mW	URP	5d	1a	Ren
2•7	-	RKZ2.7B2KG	Zener diode	2.65..2.90V, Izt=5mA, Zzt=110Ω, 200mW	URP	5d	2e	Ren
2•7	-	RKZ2.7B2KJ	Zener diode	2.65..2.90V, Izt=5mA, Zzt=110Ω, 150mW	UFP	7d	2e	Ren
2•7	an	HZU2.7B2	Zener diode	2.65..2.90V, Izt=5mA, Zzt=110Ω, 200mW	URP	5d	1a	Ren
2•7	ao	HZU2.7B1	Zener diode	2.50..2.75V, Izt=5mA, Zzt=110Ω, 200mW	URP	5d	1a	Ren
20	-	BZX384C39	Zener diode	37.0..41.0V, Izt=2.0mA, 200mW	SOD-323	5d	1a	Ttr
20	-	BZY55-C20	Zener diode	19.0..21.0V, Izt=5mA, Zzt=55Ω, 500mW	0805	70d	2d	Tsc
20	-	CDZ55C20	Zener diode	19.0..21.0V, Zzt=55Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
20	-	CDZ55C20S	Zener diode	19.0..21.0V, Zzt=55Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
20	-	CDZ55C20T	Zener diode	19.0..21.0V, Zzt=55Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
20	-	CMZ20	Zener diode	20V±5%, Izt=10mA, 2W	M-FLAT	7d	1a	Tos
20	-	CTZ55C20	Zener diode	19.0..21.0V, Izt=5mA, Zzt=55Ω, 500mW	1206	70d	2d	Ctc
20	-	CZRNC55C20-G	Zener diode	19.0..21.0V, Zt=55Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
20	-	CZRSC55C20-G	Zener diode	19.0..21.0V, Zt=55Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
20	-	FDZ39T	Zener diode	37..41V, Izt=2mA, Zzt=130Ω, 200mW	SOD-323	5d	1a	Fis
20	-	FM2100-M	Si-diode	SBR, 100V, 2.0A, Vf<0.85V(2A)	SOD-123L	10d	1a	Tfr
20	-	HZC2.0	Zener diode	2V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
20	-	KDZ20EV	Zener diode	18.8..21.2V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
20	-	KDZ20V	Zener diode	18.8..21.2V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
20	-	KDZ20VV	Zener diode	18.80..21.20V, Izt=5mA, Zzt=25Ω, 100mW	VSC	7d	1a	Kec
20	-	KL3R20	Thy-SPD	V Of-St=185V, Ifsm=30A(1ms), Ih=100mA, Bidir.	1F	1ba	1l	Shi
20	-	LM3Z39VT1G	Zener diode	37..41V, Izt=2mA, 200mW	SOD-323	5d	1u	Lrc
20	-	LM5Z39VT1G	Zener diode	37..41V, Izt=2mA, 200mW	SOD-523	6d	1g	Lrc
20	-	MAZ5200	Zener diode	18.8..21.2V, Zzt=15Ω(5mA), 500mW	MP2	11d	1a	Pan
20	-	MAZ82000H	Zener diode	20.15..20.19V, Zzt=80Ω(5mA), 150mW	SC-76	6d	1a	Pan
20	-	MAZS200	Zener diode	18.8..21.2V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
20	-	MAZY200	Zener diode	18..22V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
20	-	MM3Z39V	Zener diode	37..41V, Izt=2mA, Zzt=130Ω, 200mW	SOD-323	5d	1a	Sec
20	-	MM5Z39V	Zener diode	39V±5%, Izt=2mA, Zzt=130Ω, 200mW	SOD-523	6d	1u	Wtr
20	-	MMPZ5259BPT	Zener diode	37.05..40.95V, Izt=5mA, Zzt=130Ω, 225mW	SOD-323	5d	1a	Chm
20	-	P4SMA20	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 14.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
20	-	P6SMBJ20	TVS	Vrwm=20V, Vbr=18..22V, 29.1 21A, 600W(1ms)	DO-214AA	1d	1n	Lif
20	-	SMA3C20	Zener diode	20V±5%, Izt=37mA, Zzt<7Ω, 3W	DO-214AC	1d	1a	Exc
20	-	SMBG20	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms)	DO-215AA	5d	1a	Msc
20	-	SML4747	Zener diode	20V±5%, Izt=12.5mA, Zzt=22Ω, 1W	DO-214AC	1d	1k	Vs
20	-	TZD20WS	Zener diode	18.80..21.20V, Izt=5mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Ttr
20	-	TZD20WT	Zener diode	18.80..21.20V, Izt=5mA, Zzt=25Ω, 150mW	SOD-523	6d	1a	Ttr
20	-	TZD20WU	Zener diode	19.52..20.39V, Izt=2mA, Zzt=85Ω, 100mW	SOD-723	7d	1a	Ttr
20	-	U1ZB20	Zener diode	18..22V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
20	-	USFZ20V	Zener diode	20V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
20	-	ZD39V0	Zener diode	37..41V, 2mA, Zzt=130Ω, 200mW	SOD-323	5d	1a	Cys
20	ah	HZC20	Zener diode	20V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
20	ay	CRZ20	Zener diode	18.0..22.04V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
20-	-	MAZ82000M	Zener diode	19.5..20.5V, Zzt=80Ω(5mA), 150mW	SC-76	6d	1a	Pan
20-	-	MAZ8200GML	Zener diode	19.5..20.5V, Zzt=80Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
20-	-	MAZS2000M	Zener diode	19.5..20.5V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
20^	-	MAZ82000H	Zener diode	20.15..20.19V, Zzt=80Ω(5mA), 150mW	SC-76	6d	1a	Pan
20^	-	MAZ8200GHL	Zener diode	20.15..20.19V, Zzt=80Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
20^	-	MAZS2000H	Zener diode	20.15..21.19V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
20_	-	MAZ82000L	Zener diode	18.85..19.81V, Zzt=80Ω(5mA), 150mW	SC-76	6d	1a	Pan
20_	-	MAZ8200GLL	Zener diode	18.85..19.81V, Zzt=80Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
20_	-	MAZS2000L	Zener diode	18.85..19.81V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
20•	-	RKZ20B2KG	Zener diode	19.52..20.39V, Izt=5mA, Zzt=50Ω, 200mW	URP	5d	2e	Ren
20•	-	RKZ20B2KJ	Zener diode	19.52..20.39V, Izt=5mA, Zzt=50Ω, 150mW	UFP	7d	2e	Ren
20•	-	TZD20YWS	Zener diode	19.52..20.39V, Izt=5mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Ttr
20•	-	TZD20YWT	Zener diode	19.52..20.39V, Izt=5mA, Zzt=25Ω, 150mW	SOD-523	6d	1a	Ttr
20•	ai	HZU20B1	Zener diode	18.86..19.70V, Izt=5mA, Zzt=50Ω, 200mW	URP	5d	1a	Ren
20•	aj	HZU20B2	Zener diode	19.52..20.39V, Izt=5mA, Zzt=50Ω, 200mW	URP	5d	1a	Ren
20•	ak	HZU20B3	Zener diode	20.21..21.08V, Izt=5mA, Zzt=50Ω, 200mW	URP	5d	1a	Ren
200	-	MAZX200	Zener diode	180..220V, Zzt=60Ω(1.5mA), 1W	NMiniP2	1d	1a	Pan
200	-	P4SMA200	TVS	Vbr=180..220V, Vrwm=162V, 1.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
200	-	P6SMBJ200	TVS	Vrwm=200V, Vbr=180..220V, 2.1A, 600W(1ms)	DO-214AA	1d	1n	Lif
200	-	U1ZB200	Zener diode	180..220V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
2006	-	1SMB2EZ6.8	Zener diode	6.46..7.14V, Zzt=2Ω, Izt=73.5mA, 2W	DO-214AA	1d	1a	Pjt
2006	-	Z2SMB6.8B	Zener diode	6.8V±5%, Izt=100mA, 2W	DO-214AA	1d	1a	Ttr
2007	-	1SMB2EZ7.5	Zener diode	7.13..7.88V, Zzt=2Ω, Izt=66.5mA, 2W	DO-214AA	1d	1a	Pjt
2007	-	Z2SMB7.5B	Zener diode	7.5V±5%, Izt=100mA, 2W	DO-214AA	1d	1a	Ttr
2008	-	1SMB2EZ8.2	Zener diode	7.79..8.61V, Zzt=2Ω, Izt=61mA, 2W	DO-214AA	1d	1a	Pjt
2008	-	Z2SMB8.2B	Zener diode	8.2V±5%, Izt=100mA, 2W	DO-214AA	1d	1a	Ttr
2009	-	1SMB2EZ9.1	Zener diode	8.65..9.56V, Zzt=3Ω, Izt=55mA, 2W	DO-214AA	1d	1a	Pjt
2009	-	Z2SMB9.1B	Zener diode	9.1V±5%, Izt=50mA, 2W	DO-214AA	1d	1a	Ttr
200A	-	1.5SMC200A	TVS	Vrwm=171V, Vbr=190..210V, Ipp=5.5A, 1500W(1ms)	DO-214AB	1d	1b	Mde
200A	-	1.5SMC200A	TVS	Vrwm=171V, Vbr=190..210V, Ipp=5.5A, 1500W(1ms)	DO-214AB	1d	2s	Lif
200A	-	1.5SMC200A	TVS	Vrwm=171V, Vbr=190..210V, Ipp=5.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
200A	-	P4SMA200A	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 400W(1ms)	DO-214AC	1d	1a	Eic
200A	-	P4SMA200A	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 400W(1ms)	DO-214AC	1d	1k	Vs
200A	-	P6SMB200A	TVS	Vrwm=200V, Vbr=190..210V, 2.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
200A	-	P6SMBJ200A	TVS	Vrwm=200V, Vbr=180..220V, 2.2A, 600W(1ms)	DO-214AA	1d	1n	Lif
200A	-	SMAJP4KE200A	TVS	Vrwm=171.0V, Vbr=190.0..210.0V, Ipp=1.5A, 400W(1ms)	DO-214AC	1d	1a	Mco
200A	-	SMBJP6KE200A	TVS	Vrwm=171.0V, Vbr=190.0..210.0V, Ipp=2.2A, 600W(1ms)	DO-214AA	1d	1a	Mco
200A	-	SMCJ1.5KE200A	TVS	Vrwm=171.0V, Vbr=190.0..210.0V, Ipp=5.5A, 1500W(1ms)	DO-214AB	1d	1a	Mco
200A	-	TVP04A201A-G	TVS	Vbr=190.0..210.0V, Vrwm=171.0V, Ipp=1.46A, 400W(1ms)	DO-214AC	1d	2o	Cmc
200A	-	TVP06B201A-G	TVS	Vrwm=171.0V, Vbr=190.0..210.0V, Ipp=2.19A, 600W(1ms)	DO-214AA	1d	2o	Cmc
200B	-	1SMB3EZ200	Zener diode	200V±5%, Zzt=875Ω, Izt=3.7mA, 3W	DO-214AA	1d	1a	Pjt
200C	-	1.5SMC200CA	TVS	Vrwm=171V, Vbr=190..210V, Ipp=5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
200C	-	1.5SMC200CA	TVS	Vrwm=171V, Vbr=190..210V, Ipp=5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
200C	-	1.5SMC200CA	TVS	Vrwm=171V, Vbr=190..210V, Ipp=5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
200C	-	P4SMA200C	TVS	Vbr=180..220V, Vrwm=162V, 1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
200C	-	P4SMA200CA	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
200C	-	P6SMB200CA	TVS	Vrwm=200V, Vbr=190..210V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
200C	-	P6SMBJ200C	TVS	Vrwm=200V, Vbr=180..220V, 2.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
200C	-	SMAJP4KE200CA	TVS	Vrwm=171.0V, Vbr=190.0..210.0V, Ipp=1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
200C	-	SMBJP6KE200CA	TVS	Vrwm=171.0V, Vbr=190.0..210.0V, Ipp=2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
200C	-	SMCJ1.5KE200CA	TVS	Vrwm=171.0V, Vbr=190.0..210.0V, Ipp=5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
200C	-	TVP04A201CA-G	TVS	Vbr=190.0..210.0V, Vrwm=171.0V, Ipp=1.46A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
200C	-	TVP06B201ACA-G	TVS	Vrwm=171.0V, Vbr=190.0..210.0V, Ipp=2.19A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
200CA	-	P4SMA200CA	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
200CA	-	P6SMB200CA	TVS	Vbr=190..210V, Vrwm=171V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
200CA	-	P6SMBJ200CA	TVS	Vrwm=200V, Vbr=180..220V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
200Y	-	U1ZB200-Y	Zener diode	190..210V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
200Z	-	1SMA200Z	Zener diode	200V±5%, Izt=1.2mA, Zzt=1500Ω, 1W	DO-214AC	1d	1a	Trs
200Z	-	U1ZB200-Z	Zener diode	200..220V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
200Z	-	Z1SMA200A	Zener diode	190.0..210.0V, Izt=1.2mA, 1W	SMA	1d	1ab	Ttr
201	-	HZU20-1L	Zener diode	18.8..19.7V, Izt=0.5mA, Zzt=100Ω, 150mW	URP	5d	1a	Ren
2010	-	1SMB2EZ10	Zener diode	9.5..10.5V, Zzt=4Ω, Izt=50mA, 2W	DO-214AA	1d	1a	Pjt
2010	-	Z2SMB10B	Zener diode	10V±5%, Izt=50mA, 2W	DO-214AA	1d	1a	Ttr
2011	-	1SMB2EZ11	Zener diode	10.45..11.55V, Zzt=4Ω, Izt=45.5mA, 2W	DO-214AA	1d	1a	Pjt
2011	-	Z2SMB11B	Zener diode	11V±5%, Izt=50mA, 2W	DO-214AA	1d	1a	Ttr
2012	-	1SMB2EZ12	Zener diode	11.4..12.6V, Zzt=5Ω, Izt=41.5mA, 2W	DO-214AA	1d	1a	Pjt



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
2012	-	Z2SMB12B	Zener diode	12V±5%, Izt=50mA, 2W	DO-214AA	1d	1a	Ttr
2013	-	1SMB2EZ13	Zener diode	12.35.3.65V, Zzt=5Ω, Izt=38.5mA, 2W	DO-214AA	1d	1a	Pjt
2013	-	Z2SMB13B	Zener diode	13V±5%, Izt=50mA, 2W	DO-214AA	1d	1a	Ttr
2014	-	1SMB2EZ14	Zener diode	13.3..14.7V, Zzt=6Ω, Izt=35.7mA, 2W	DO-214AA	1d	1a	Pjt
2014	-	Z2SMB14B	Zener diode	14V±5%, Izt=50mA, 2W	DO-214AA	1d	1a	Ttr
2015	-	1SMB2EZ15	Zener diode	14.25..15.75V, Zzt=7Ω, Izt=33.4mA, 2W	DO-214AA	1d	1a	Pjt
2015	-	Z2SMB15B	Zener diode	15V±5%, Izt=50mA, 2W	DO-214AA	1d	1a	Ttr
2016	-	1SMB2EZ16	Zener diode	15.2..16.8V, Zzt=8Ω, Izt=31.2mA, 2W	DO-214AA	1d	1a	Pjt
2016	-	Z2SMB16B	Zener diode	16V±5%, Izt=25mA, 2W	DO-214AA	1d	1a	Ttr
2017	-	1SMB2EZ17	Zener diode	16.15..17V, Zzt=9Ω, Izt=29.4mA, 2W	DO-214AA	1d	1a	Pjt
2017	-	Z2SMB17B	Zener diode	17V±5%, Izt=50mA, 2W	DO-214AA	1d	1a	Ttr
2018	-	1SMB2EZ18	Zener diode	17.1..18.9V, Zzt=10Ω, Izt=27.8mA, 2W	DO-214AA	1d	1a	Pjt
2018	-	Z2SMB18B	Zener diode	18V±5%, Izt=25mA, 2W	DO-214AA	1d	1a	Ttr
2019	-	1SMB2EZ19	Zener diode	18.05..19.95V, Zzt=11Ω, Izt=26.3mA, 2W	DO-214AA	1d	1a	Pjt
2019	-	Z2SMB19B	Zener diode	19V±5%, Izt=50mA, 2W	DO-214AA	1d	1a	Ttr
202	-	HZU20-2L	Zener diode	19.5..20.4V, Izt=0.5mA, Zzt=100Ω, 150mW	URP	5d	1a	Ren
2020	-	1SMB2EZ20	Zener diode	19..21V, Zzt=11Ω, Izt=25mA, 2W	DO-214AA	1d	1a	Pjt
2020	-	Z2SMB20B	Zener diode	20V±5%, Izt=25mA, 2W	DO-214AA	1d	1a	Ttr
2022	-	1SMB2EZ22	Zener diode	20.9..23.1V, Zzt=12Ω, Izt=22.8 mA, 2W	DO-214AA	1d	1a	Pjt
2022	-	Z2SMB22B	Zener diode	22V±5%, Izt=25mA, 2W	DO-214AA	1d	1a	Ttr
2024	-	1SMB2EZ24	Zener diode	22.8..25.2V, Zzt=13Ω, Izt=20.8mA, 2W	DO-214AA	1d	1a	Pjt
2024	-	Z2SMB24B	Zener diode	24V±5%, Izt=25mA, 2W	DO-214AA	1d	1a	Ttr
2025	-	1SMB2EZ25	Zener diode	23.75..26.25V, Zzt=14Ω, Izt=20mA, 2W	DO-214AA	1d	1a	Pjt
2025	-	Z2SMB25B	Zener diode	25V±5%, Izt=25mA, 2W	DO-214AA	1d	1a	Ttr
2027	-	1SMB2EZ27	Zener diode	25.65..28.35V, Zzt=18Ω, Izt=18.5mA, 2W	DO-214AA	1d	1a	Pjt
2027	-	Z2SMB27B	Zener diode	27V±5%, Izt=25mA, 2W	DO-214AA	1d	1a	Ttr
2028	-	1SMB2EZ28	Zener diode	26.6..29.4V, Zzt=18Ω, Izt=17mA, 2W	DO-214AA	1d	1a	Pjt
2028	-	Z2SMB28B	Zener diode	28V±5%, Izt=25mA, 2W	DO-214AA	1d	1a	Ttr
203	-	HZU20-3L	Zener diode	20.2..21.1V, Izt=0.5mA, Zzt=100Ω, 150mW	URP	5d	1a	Ren
2030	-	1SMB2EZ30	Zener diode	28.5..31.5V, Zzt=20Ω, Izt=16.6mA, 2W	DO-214AA	1d	1a	Pjt
2030	-	Z2SMB30B	Zener diode	30V±5%, Izt=25mA, 2W	DO-214AA	1d	1a	Ttr
2033	-	1SMB2EZ33	Zener diode	31.35..34.65V, Zzt=23Ω, Izt=15.1mA, 2W	DO-214AA	1d	1a	Pjt
2033	-	Z2SMB33B	Zener diode	33V±5%, Izt=25mA, 2W	DO-214AA	1d	1a	Ttr
2036	-	1SMB2EZ36	Zener diode	34.2..37.8V, Zzt=25Ω, Izt=13.9mA, 2W	DO-214AA	1d	1a	Pjt
2036	-	Z2SMB36B	Zener diode	36V±5%, Izt=10mA, 2W	DO-214AA	1d	1a	Ttr
2039	-	1SMB2EZ39	Zener diode	37.05..40.95V, Zzt=30Ω, Izt=12.8mA, 2W	DO-214AA	1d	1a	Pjt
2039	-	Z2SMB39B	Zener diode	39V±5%, Izt=10mA, 2W	DO-214AA	1d	1a	Ttr
2043	-	1SMB2EZ43	Zener diode	40.85..45.15V, Zzt=35Ω, Izt=11.6mA, 2W	DO-214AA	1d	1a	Pjt
2043	-	Z2SMB43B	Zener diode	43V±5%, Izt=10mA, 2W	DO-214AA	1d	1a	Ttr
2047	-	1SMB2EZ47	Zener diode	44.65..49.35V, Zzt=40Ω, Izt=10.6mA, 2W	DO-214AA	1d	1a	Pjt
2047	-	Z2SMB47B	Zener diode	47V±5%, Izt=10mA, 2W	DO-214AA	1d	1a	Ttr
2051	-	1SMB2EZ51	Zener diode	48.45..53.55V, Zzt=48Ω, Izt=9.8mA, 2W	DO-214AA	1d	1a	Pjt
2051	-	Z2SMB51B	Zener diode	51V±5%, Izt=10mA, 2W	DO-214AA	1d	1a	Ttr
2056	-	1SMB2EZ56	Zener diode	56V±5%, Zzt=55Ω, Izt=9mA, 2W	DO-214AA	1d	1a	Pjt
2058	-	1SMB2EZ68	Zener diode	68V±5%, Zzt=75Ω, Izt=4.7mA, 2W	DO-214AA	1d	1a	Pjt
2062	-	1SMB2EZ62	Zener diode	62V±5%, Zzt=60Ω, Izt=8.1mA, 2W	DO-214AA	1d	1a	Pjt
2075	-	1SMB2EZ75	Zener diode	75V±5%, Zzt=90Ω, Izt=6.7mA, 2W	DO-214AA	1d	1a	Pjt
2091	-	1SMB2EZ91	Zener diode	91V±5%, Zzt=125Ω, Izt=5.5mA, 2W	DO-214AA	1d	1a	Pjt
20A	-	1.5SMC20A	TVS	Vrwm=17.1V, Vbr=19..21V, Ipp=54A, 1500W(1ms)	DO-214AB	1d	1k	Vs
20A	-	1.5SMC20A	TVS	Vrwm=17.1V, Vbr=19..21V, Ipp=54A, 1500W(1ms)	DO-214AB	1d	1b	Mde
20A	-	1.5SMC20A	TVS	Vrwm=17.1V, Vbr=19..21V, Ipp=54A, 1500W(1ms)	403	3d	2t	Ons
20A	-	1.5SMC20A	TVS	Vrwm=17.1V, Vbr=19..21V, Ipp=54A, 1500W(1ms)	DO-214AB	1d	2s	Lif
20A	-	1SMC20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, 46.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
20A	-	MMF20A	TVS	Vrwm=20V, Vbr=22.2..25.5V, Ipp=6.2A, 200W(1ms)	SOD-123FL	7d	2m	Sst
20A	-	P4SMA20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15.0A, 400W(1ms)	DO-214AC	1d	1k	Vs
20A	-	P4SMA20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
20A	-	P6SMB20A	TVS	Vrwm=20V, Vbr=19..21.0V, 21.7A, 600W(1ms)	403A	3d	1s	Ons
20A	-	P6SMB20A	TVS	Vrwm=20V, Vbr=19..21.0V, 21.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
20A	-	P6SMBJ20A	TVS	Vrwm=20V, Vbr=18..22V, 227.7 22A, 600W(1ms)	DO-214AA	1d	1n	Lif
20A	-	RKZ20AKU	Zener diode	18.05..18.96V, Izt=10mA, Zzt=50Ω, 500mW	TURP-FM	7d	1a	Ren
20A	-	SMAJ20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, 12.3A, 400W(1ms)	DO-214AC	1d	1a	Sus
20A	-	SMAJP4KE20A	TVS	Vrwm=17.10V, Vbr=19.0..21.0V, Ipp=14.8A, 400W(1ms)	DO-214AC	1d	1a	Mco
20A	-	SMBG20A	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms)	DO-215AA	5d	1a	Msc
20A	-	SMBJ20A	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms)	DO-214AA	1d	1a	Sus
20A	-	SMBJP6KE20A	TVS	Vrwm=17.10V, Vbr=19.0..21.0V, Ipp=22.0A, 600W(1ms)	DO-214AA	1d	1a	Mco
20A	-	SMCJ1.5KE20A	TVS	Vrwm=17.10V, Vbr=19.0..21.0V, Ipp=54.9A, 1500W(1ms)	DO-214AB	1d	1a	Mco
20A	-	SMCJ20A	TVS	Vrwm=20V, Vbr=22.2..25.5V, 41.9A, 1500W(1ms)	DO-214AB	1d	1k	Sus
20A	-	SMF20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, Ipp=6.2A, 200W(1ms)	SOD-123FL	7d	1a	Mco
20A	-	SZP6SMB20A	TVS	Vrwm=20V, Vbr=19..21.0V, 21.7A, 600W(1ms)	403A	3d	1s	Ons
20A	-	TVP04A200A-G	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, Ipp=14.44A, 400W(1ms)	DO-214AC	1d	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
20A	-	TVP06B20A-G	TVS	Vrwm=17.1V, Vbr=19.0..21.0V, Ipp=21.66A, 600W(1ms)	DO-214AA	1d	2o	Cmc
20A	-	UMA20A	TVS	Vrwm=20V, Vbr=22.2..32.4V, 15.4A, 500W(1ms)	UltraMite	14d	1v	Msc
20A8	-	1SMB2EZ8.7	Zener diode	8.27..9.14V, Zzt=2Ω, Izt=58mA, 2W	DO-214AA	1d	1a	Pjt
20A8	-	Z2SMB8.7B	Zener diode	8.27..9.14V, Izt=58mA, Zzt=2Ω, 2W	DO-214AA	1d	1a	Ttr
20AP	-	15TPSMC20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 54.9A, 1500W(1ms)	DO-214AB	1d	1p	Lif
20AP	-	4TPSMA20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 14.8A, 400W(1ms)	DO-214AC	1d	1p	Lif
20AP	-	6TPSMB20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 22.0A, 600W(1ms)	DO-214AA	1d	1p	Lif
20B	-	1PMT5920B	Zener diode	6.2V±5%, Izt=241mA, 2.5W	DO-216AA	4d	1g	Ons
20B	-	1SMB3EZ20	Zener diode	20V±5%, Zzt=11Ω, Izt=37.0mA, 3W	DO-214AA	1d	1a	Pjt
20B	-	HZF20BP	Zener diode	20V±5%, Iz=20mA, 900mW	LRP	1d	2f	Ren
20B	-	PTZ20B	Zener diode	20V±10%, Izt=20mA, 1W	DO-214AC	1d	1a	Rhm
20B	-	RKZ20BKU	Zener diode	18.63..19.59V, Izt=10mA, Zzt=50Ω, 500mW	TURP-FM	7d	1a	Ren
20B	-	SMAJ5920B	Zener diode	6.2V±5%, Izt=60.5mA, Zzt=2.0Ω, 1.5W	DO-214AC	1d	1a	Mco
20B	-	Z3SMB20B	Zener diode	19.0..21.0V, Izt=37mA, Zzt=7Ω, 3W	DO-214AA	1d	1a	Ttr
20C	-	1.5SMC20CA	TVS	Vrwm=17.1V, Vbr=19..21V, Ipp=54A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
20C	-	1.5SMC20CA	TVS	Vrwm=17.1V, Vbr=19..21V, Ipp=54A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
20C	-	1.5SMC20CA	TVS	Vrwm=17.1V, Vbr=19..21V, Ipp=54A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
20C	-	HZF20CP	Zener diode	20V±10%, Iz=20mA, 900mW	LRP	1d	2f	Ren
20C	-	P4SMA20C	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 14.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
20C	-	P4SMA20CA	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
20C	-	P6SMB20CA	TVS	Vrwm=20V, Vbr=19..21.0V, 21.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
20C	-	P6SMBJ20C	TVS	Vrwm=20V, Vbr=18..22V, 21A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
20C	-	RKZ20CKU	Zener diode	19.23..20.22V, Izt=10mA, Zzt=50Ω, 500mW	TURP-FM	7d	1a	Ren
20C	-	SMAJP4KE20CA	TVS	Vrwm=17.10V, Vbr=19.0..21.0V, Ipp=14.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
20C	-	SMBG20C	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
20C	-	SMBJP6KE20CA	TVS	Vrwm=17.10V, Vbr=19.0..21.0V, Ipp=22.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
20C	-	SMCJ1.5KE20CA	TVS	Vrwm=17.10V, Vbr=19.0..21.0V, Ipp=54.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
20C	-	TVP04A200CA-G	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, Ipp=14.44A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
20C	-	TVP06B20ACA-G	TVS	Vrwm=17.1V, Vbr=19.0..21.0V, Ipp=21.66A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
20CA	-	1SMC20CA	TVS	Vbr=22.2..24.5V, Vrwm=20V, 46.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
20CA	-	MMF20CA	TVS	Vrwm=20V, Vbr=22.2..25.5V, Ipp=6.2A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
20CA	-	P4SMA20CA	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
20CA	-	P6SMB20CA	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 22.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
20CA	-	P6SMBJ20CA	TVS	Vrwm=20V, Vbr=18..22V, 22A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
20CA	-	SMAJ20CA	TVS	Vrwm=20V, Vbr=22.2..24.5V, 12.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
20CA	-	SMBG20CA	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
20CA	-	SMBJ20CA	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
20CA	-	SMCJ20CA	TVS	Vrwm=20V, Vbr=22.2..25.5V, 41.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
20CA	-	SMF20CA	TVS	Vbr=22.2..24.5V, Vrwm=20V, Ipp=6.2A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
20CA	-	UMA20CA	TVS	Vrwm=20V, Vbr=22.2..32.4V, 15.4A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
20CP	-	15TPSMC20CA	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 54.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
20CP	-	4TPSMA20CA	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 14.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1p	Lif
20CP	-	6TPSMB20CA	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 22.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
20D	-	RKZ20DKU	Zener diode	19.72..20.72V, Izt=10mA, Zzt=50Ω, 500mW	TURP-FM	7d	1a	Ren
20G	-	ZD20G-CA2	Zener diode	20V±5%, Zzt=85Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
20G	-	ZD20G-CB2	Zener diode	20V±5%, Zzt=85Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
20L	-	ZD20L-CA2	Zener diode	20V±5%, Zzt=85Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
20L	-	ZD20L-CB2	Zener diode	20V±5%, Zzt=85Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
20P	-	BZD27C20P	Zener diode	19.0..21.0V, Zzt=15Ω, Izt=25mA, 800mW	SOD-123FL	7d	1a	Pjt
20P	-	MFPZ20	Zener diode	19.0..21.0V, Izt=25mA, Zzt=12Ω, 800mW	SOD-123FL	7d	1a	Ttr
20V	-	SMA20	TVS	Vbr=22.2..27.1V, Vrwm=20.0V, 8.4A, 300W(1ms)	DO-214AC	1d	1a	Mic
20V	-	SMB20	TVS	Vbr=22.2..27.1V, Vrwm=20V, 16.8A, 600W(1ms)	DO-214AA	1d	1a	Mic
20V	-	SMC20	TVS	Vbr=22.2..27.1V, Vrwm=20V, 41.9A, 1500W(1ms)	DO-214AB	1d	1a	Mic
20VA	-	SMA20A	TVS	Vbr=22.2..24.5V, Vrwm=20.0V, 9.3A, 300W(1ms)	DO-214AC	1d	1a	Mic
20VA	-	SMB20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, 18.5A, 600W(1ms)	DO-214AA	1d	1a	Mic
20VA	-	SMC20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, 46.3A, 1500W(1ms)	DO-214AB	1d	1a	Mic
20VB	-	BZT52B20	Zener diode	19.60..20.40V, Izt=5mA, Zzt=55Ω, 500mW	SOD-123FL	7d	1a	Tsc
20VB	-	MMSZ20VBW	Zener diode	19.60..20.40V, Izt=5mA, Zzt=55Ω, 500mW	SOD-123FL	7d	1a	Tac
20VC	-	SMA20C	TVS	Vbr=22.2..27.1V, Vrwm=20.0V, 8.4A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
20VC	-	SMB20C	TVS	Vbr=22.2..27.1V, Vrwm=20V, 16.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
20VC	-	SMC20C	TVS	Vbr=22.2..27.1V, Vrwm=20V, 41.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
20VCA	-	SMA20CA	TVS	Vbr=22.2..24.5V, Vrwm=20.0V, 9.3A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
20VCA	-	SMB20CA	TVS	Vbr=22.2..24.5V, Vrwm=20V, 18.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
20VCA	-	SMC20CA	TVS	Vbr=22.2..24.5V, Vrwm=20V, 46.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
20VZ	-	BZT52C20	Zener diode	19.0..21.0V, Izt=5mA, Zzt=55Ω, 500mW	SOD-123FL	7d	1a	Tsc
20VZ	-	MMSZ20VCW	Zener diode	19.0..21.00V, Izt=5mA, Zzt=55Ω, 500mW	SOD-123FL	7d	1a	Tac
20VZ	-	TCMMSZ20V	Zener diode	20V±5%, Izt=5mA, Zzt=51Ω, 500mW	SOD-123FL	7d	1a	Tac
20VZ	-	ZGFM0520C-MH	Zener diode	19.0..21.0V, Izt=5mA, Zzt=51Ω, 500mW	SOD-123	5d	1a	Pic
20Z	-	BZD2C200P	Zener diode	200V±5%, Izt=4mA, 1W	DO-219AA	7d	2n	Fag
21	-	BZX384C43	Zener diode	40.0..46.0V, Izt=2.0mA, 200mW	SOD-323	5d	1a	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
21	-	FDZ43T	Zener diode	40..46V, Izt=2mA, Zzt=150Ω, 200mW	SOD-323	5d	1a	Fis
21	-	HMSZ5221B	Zener diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOD-323	5d	1d	Hsn
21	-	LM3Z43VT1G	Zener diode	40..46V, Izt=2mA, 200mW	SOD-323	5d	1u	Lrc
21	-	LM5Z43VT1G	Zener diode	40..46V, Izt=1mA, 200mW	SOD-523	6d	1g	Lrc
21	-	MM3Z43V	Zener diode	40..46V, Izt=2mA, Zzt=150Ω, 200mW	SOD-323	5d	1a	Sec
21	-	MM5Z43V	Zener diode	43V±5%, Izt=2mA, Zzt=150Ω, 200mW	SOD-523	6d	1u	Wtr
21	-	MMPZ5260BPT	Zener diode	40.85..45.15V, Izt=3.0mA, Zzt=93Ω, 225mW	SOD-323	5d	1a	Chm
21	-	ZD43V0	Zener diode	40..46V, 2mA, Zzt=150Ω, 200mW	SOD-323	5d	1a	Cys
21	-	ZD5221BS2	Zener diode	2.4V±5%, 20mA, Zzt=30Ω, 500mW	SOD-323	5d	1a	Cys
210	-	SMD210APT	Si-diode	SBR, 100V, 2A, Vf<0.8V(2A)	SOD-123S	8d	1a	Chm
210	-	SS2PH10	Si-diode	SBR, 100V, 2A, Vf<0.8V(2A)	DO-220AA	8d	1k	Vs
2100	-	1SMB2EZ100	Zener diode	100V±5%, Zzt=175Ω, Izt=5mA, 2W	DO-214AA	1d	1a	Pjt
2110	-	1SMB2EZ110	Zener diode	110V±5%, Zzt=250Ω, Izt=4.5mA, 2W	DO-214AA	1d	1a	Pjt
2120	-	1SMB2EZ120	Zener diode	120V±5%, Zzt=325Ω, Izt=4.2mA, 2W	DO-214AA	1d	1a	Pjt
2130	-	1SMB2EZ130	Zener diode	130V±5%, Zzt=400Ω, Izt=3.8mA, 2W	DO-214AA	1d	1a	Pjt
2140	-	1SMB2EZ140	Zener diode	140V±5%, Zzt=500Ω, Izt=3.6mA, 2W	DO-214AA	1d	1a	Pjt
2150	-	1SMB2EZ150	Zener diode	150V±5%, Zzt=575Ω, Izt=3.3mA, 2W	DO-214AA	1d	1a	Pjt
2160	-	1SMB2EZ160	Zener diode	160V±5%, Zzt=350Ω, Izt=3.1mA, 2W	DO-214AA	1d	1a	Pjt
2170	-	1SMB2EZ170	Zener diode	170V±5%, Zzt=675Ω, Izt=2.9mA, 2W	DO-214AA	1d	1a	Pjt
2180	-	1SMB2EZ180	Zener diode	180V±5%, Zzt=725Ω, Izt=2.8mA, 2W	DO-214AA	1d	1a	Pjt
2182	-	1SMB2EZ82	Zener diode	82V±5%, Zzt=100Ω, Izt=6.1mA, 2W	DO-214AA	1d	1a	Pjt
2190	-	1SMB2EZ190	Zener diode	190V±5%, Zzt=825Ω, Izt=2.6mA, 2W	DO-214AA	1d	1a	Pjt
21B	-	1PMT5921B	Zener diode	6.8V±5%, Izt=220mA, 2.5W	DO-216AA	4d	1g	Ons
21B	-	MMHZ5221BPT	Zener diode	2.280..2.520V, Izt=5mA, Zzt=100Ω, 225mW	SOD-123	5d	1a	Chm
21B	-	SMAJ5921B	Zener diode	6.8V±5%, Izt=55.1mA, Zzt=2.5Ω, 1.5W	DO-214AC	1d	1a	Mco
21S	-	MMHZ5221SPT	Zener diode	2.352..2.448V, Izt=5mA, Zzt=100Ω, 225mW	SOD-123	5d	1a	Chm
22	-	BZY55-C22	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 500mW	0805	70d	2d	Tsc
22	-	CDZ55C22	Zener diode	20.90..23.10V, Zzt=55Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
22	-	CDZ55C22S	Zener diode	20.90..23.10V, Zzt=55Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
22	-	CDZ55C22T	Zener diode	20.90..23.10V, Zzt=55Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
22	-	CMZ22	Zener diode	22V±5%, Izt=10mA, 2W	M-FLAT	7d	1a	Tos
22	-	CTZ55C22	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 500mW	1206	70d	2d	Ctc
22	-	CZRNC55C22-G	Zener diode	20.90..23.10V, Zt=55Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
22	-	CZRSC55C22-G	Zener diode	20.90..23.10V, Zt=55Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
22	-	FDZ2.4VT	Zener diode	2.430..2.630V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Fis
22	-	FM220-M	Si-diode	SBR, 20V, 2.0A, Vf<0.50V(2A)	SOD-123L	10d	1a	Tfr
22	-	GDZ2V4B-V	Zener diode	2.43..2.63V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	2m	Vs
22	-	HMSZ5222B	Zener diode	2.5V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOD-323	5d	1d	Hsn
22	-	HZC2.2	Zener diode	2.2V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
22	-	KDZ22EV	Zener diode	20.8..23.3V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
22	-	KDZ22V	Zener diode	20.8..23.3V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
22	-	KDZ22VV	Zener diode	20.80..23.30V, Izt=5mA, Zzt=30Ω, 100mW	VSC	7d	1a	Kec
22	-	LBZT52B2V4T1G	Zener diode	2.43..2.63V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
22	-	LEDZ2.4BT1G	Zener diode	2.43..2.63V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
22	-	LUDZS2.4BT1G	Zener diode	2.43..2.63V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
22	-	MAZ5220	Zener diode	20.8..23.3V, Zzt=20Ω(5mA), 500mW	MP2	11d	1a	Pan
22	-	MAZ82200H	Zener diode	22.1..23.24V, Zzt=80Ω(5mA), 150mW	SC-76	6d	1a	Pan
22	-	MAZS220	Zener diode	20.8..23.3V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
22	-	MAZY220	Zener diode	19.8..24.2V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
22	-	MMPZ5251SPT	Zener diode	21.56..22.44V, Izt=5mA, Zzt=55Ω, 225mW	SOD-323	5d	1a	Chm
22	-	P4SMA22	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 13.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
22	-	P6SMBJ22	TVS	Vrwm=22V, Vbr=19.8..24.2V, 19A, 600W(1ms)	DO-214AA	1d	1n	Lif
22	-	SMA3C22	Zener diode	22V±5%, Izt=34mA, Zzt<8Ω, 3W	DO-214AC	1d	1a	Exc
22	-	SMBG22	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms)	DO-215AA	5d	1a	Msc
22	-	SML4748	Zener diode	22V±5%, Izt=11.5mA, Zzt=23Ω, 1W	DO-214AC	1d	1k	Vs
22	-	SS2P2	Si-diode	SBR, 20V, 2A, Vf<0.54V(2A)	DO-220AA	8d	1k	Vs
22	-	TZD22WS	Zener diode	20.80..23.30V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Ttr
22	-	TZD22WT	Zener diode	20.80..23.30V, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Ttr
22	-	TZD22WU	Zener diode	21.54..22.47V, Izt=2mA, Zzt=100Ω, 100mW	SOD-723	7d	1a	Ttr
22	-	U1ZB22	Zener diode	19.8..24.2V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos
22	-	UDZS2.4B	Zener diode	2.43..2.63V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Wtr
22	-	USFZ22V	Zener diode	22V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
22	-	ZD5222BS2	Zener diode	2.5V±5%, 20mA, Zzt=30Ω, 500mW	SOD-323	5d	1a	Cys
22	ah	HZC22	Zener diode	22V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
22	ay	CRZ22	Zener diode	19.8..24.26V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
22-	-	MAZ82200M	Zener diode	21.45..22.55V, Zzt=80Ω(5mA), 150mW	SC-76	6d	1a	Pan
22-	-	MAZ8220GML	Zener diode	21.45..22.55V, Zzt=80Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
22-	-	MAZS2200M	Zener diode	21.45..22.55V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
22^	-	MAZ82200H	Zener diode	22.1..23.24V, Zzt=80Ω(5mA), 150mW	SC-76	6d	1a	Pan
22^	-	MAZ8220GHL	Zener diode	22.1..23.24V, Zzt=80Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
22^	-	MAZS2200H	Zener diode	22.1..23.24V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
22_	-	MAZ82200L	Zener diode	20.8..21.86V, Zzt=80Ω(5mA), 150mW	SC-76	6d	1a	Pan
22_	-	MAZ8220GLL	Zener diode	20.8..21.86V, Zzt=80Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
22_	-	MAZS2200L	Zener diode	20.8..21.86V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
22•	-	RKZ22B2KG	Zener diode	21.54..22.47V, Izt=5mA, Zzt=55Ω, 200mW	URP	5d	2e	Ren
22•	-	RKZ22B2KJ	Zener diode	21.54..22.47V, Izt=5mA, Zzt=55Ω, 150mW	UFP	7d	2e	Ren
22•	-	TZD22YWS	Zener diode	21.54..22.47V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Ttr
22•	-	TZD22YWT	Zener diode	21.54..22.47V, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Ttr
22•	ai	HZU22B1	Zener diode	20.88..21.77V, Izt=5mA, Zzt=55Ω, 200mW	URP	5d	1a	Ren
22•	aj	HZU22B2	Zener diode	21.54..22.47V, Izt=5mA, Zzt=55Ω, 200mW	URP	5d	1a	Ren
22•	ak	HZU22B3	Zener diode	22.23..23.17V, Izt=5mA, Zzt=55Ω, 200mW	URP	5d	1a	Ren
220	-	MAZX220	Zener diode	198..242V, Zzt=10Ω(0.5mA), 1W	NMiniP2	1d	1a	Pan
220	-	P4SMA220	TVS	Vbr=198..242V, Vrwm=175V, 1.16A, 400W(1ms)	DO-214AC	1d	1a	Eic
220	-	P6SMBJ220	TVS	Vrwm=220V, Vbr=198..242V, 1.8A, 600W(1ms)	DO-214AA	1d	1n	Lif
220	-	U1ZB220	Zener diode	198..242V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
2200	-	1SMB2EZ200	Zener diode	200V±5%, Zzt=900Ω, Izt=2.5mA, 2W	DO-214AA	1d	1a	Pjt
220A	-	1.5SMC220A	TVS	Vrwm=185V, Vbr=209..231V, Ipp=4.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
220A	-	1.5SMC220A	TVS	Vrwm=185V, Vbr=209..231V, Ipp=4.6A, 1500W(1ms)	DO-214AB	1d	1b	Mde
220A	-	1.5SMC220A	TVS	Vrwm=185V, Vbr=209..231V, Ipp=4.6A, 1500W(1ms)	DO-214AB	1d	2s	Lif
220A	-	P4SMA220A	TVS	Vbr=209..231V, Vrwm=185V, 1.22A, 400W(1ms)	DO-214AC	1d	1k	Vs
220A	-	P4SMA220A	TVS	Vbr=209..231V, Vrwm=185V, 1.22A, 400W(1ms)	DO-214AC	1d	1a	Eic
220A	-	P6SMB220A	TVS	Vrwm=220V, Vbr=209..231V, 1.83A, 600W(1ms)	DO-214AA	1d	1k	Vs
220A	-	P6SMBJ220A	TVS	Vrwm=220V, Vbr=198..242V, 1.8A, 600W(1ms)	DO-214AA	1d	1n	Lif
220A	-	SMAJP4KE220A	TVS	Vrwm=185.0V, Vbr=209.0..231.0V, Ipp=1.3A, 400W(1ms)	DO-214AC	1d	1a	Mco
220A	-	SMBJP6KE220A	TVS	Vrwm=185.0V, Vbr=209.0..231.0V, Ipp=1.9A, 600W(1ms)	DO-214AA	1d	1a	Mco
220A	-	SMCJ1.5KE220A	TVS	Vrwm=185.0V, Vbr=209.0..231.0V, Ipp=4.6A, 1500W(1ms)	DO-214AB	1d	1a	Mco
220A	-	TSP220SA	Thy-SPD	V Of-St=220V, 50A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
220A	-	TVP04A221A-G	TVS	Vbr=209.0..131.0V, Vrwm=185.0V, Ipp=1.22A, 400W(1ms)	DO-214AC	1d	2o	Cmc
220A	-	TVP06B221A-G	TVS	Vrwm=185.0V, Vbr=209.0..231.0V, Ipp=1.83A, 600W(1ms)	DO-214AA	1d	2o	Cmc
220B	-	TSP220SB	Thy-SPD	V Of-St=220V, 80A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
220C	-	1.5SMC220CA	TVS	Vrwm=175V, Vbr=198..242V, Ipp=4.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
220C	-	1.5SMC220CA	TVS	Vrwm=175V, Vbr=198..242V, Ipp=4.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
220C	-	1.5SMC220CA	TVS	Vrwm=175V, Vbr=198..242V, Ipp=4.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
220C	-	P4SMA220C	TVS	Vbr=198..242V, Vrwm=175V, 1.16A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
220C	-	P4SMA220CA	TVS	Vbr=209..231V, Vrwm=185V, 1.22A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
220C	-	P6SMB220CA	TVS	Vrwm=220V, Vbr=209..231V, 1.83A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
220C	-	P6SMBJ220C	TVS	Vrwm=220V, Vbr=198..242V, 1.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
220C	-	SMAJP4KE220CA	TVS	Vrwm=185.0V, Vbr=209.0..231.0V, Ipp=1.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
220C	-	SMBJP6KE220CA	TVS	Vrwm=185.0V, Vbr=209.0..231.0V, Ipp=1.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
220C	-	SMCJ1.5KE220CA	TVS	Vrwm=185.0V, Vbr=209.0..231.0V, Ipp=4.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
220C	-	TSP220SC	Thy-SPD	V Of-St=220V, 100A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
220C	-	TVP04A221CA-G	TVS	Vbr=209.0..131.0V, Vrwm=185.0V, Ipp=1.22A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
220C	-	TVP06B221ACA-G	TVS	Vrwm=185.0V, Vbr=209.0..231.0V, Ipp=1.83A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
220CA	-	P4SMA220CA	TVS	Vbr=209..231V, Vrwm=185V, 1.22A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
220CA	-	P6SMB220CA	TVS	Vbr=209..231V, Vrwm=185V, 1.83A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
220CA	-	P6SMBJ220CA	TVS	Vrwm=220V, Vbr=198..242V, 1.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
220Y	-	U1ZB220-Y	Zener diode	210..230V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
220Z	-	U1ZB220-Z	Zener diode	220..240V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
221	-	HZU22-1L	Zener diode	20.9..21.9V, Izt=0.5mA, Zzt=100Ω, 150mW	URP	5d	1a	Ren
222	-	HZU22-2L	Zener diode	21.6..22.6V, Izt=0.5mA, Zzt=100Ω, 150mW	URP	5d	1a	Ren
223	-	HZU22-3L	Zener diode	22.3..23.3V, Izt=0.5mA, Zzt=100Ω, 150mW	URP	5d	1a	Ren
229C	-	MMSZ5229CW	Zener diode	4.214..4.386V, Izt=20mA, Zzt=22Ω, 500mW	SOD-123FL	7d	1a	Tac
22A	-	1.5SMC22A	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, Ipp=49A, 1500W(1ms)	403	3d	2t	Ons
22A	-	1.5SMC22A	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, Ipp=49A, 1500W(1ms)	DO-214AB	1d	1b	Mde
22A	-	1.5SMC22A	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, Ipp=49A, 1500W(1ms)	DO-214AB	1d	1k	Vs
22A	-	1.5SMC22A	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, Ipp=49A, 1500W(1ms)	DO-214AB	1d	2s	Lif
22A	-	1SMC22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, 42.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
22A	-	MMF22A	TVS	Vrwm=22V, Vbr=24.4..28.0V, Ipp=5.6A, 200W(1ms)	SOD-123FL	7d	2m	Sst
22A	-	P4SMA22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
22A	-	P4SMA22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14.0A, 400W(1ms)	DO-214AC	1d	1k	Vs
22A	-	P6SMB22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 20.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
22A	-	P6SMB22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 20.0A, 600W(1ms)	403A	3d	1s	Ons
22A	-	P6SMBJ22A	TVS	Vrwm=22V, Vbr=19.8..24.2V, 20A, 600W(1ms)	DO-214AA	1d	1n	Lif
22A	-	RKZ22AKU	Zener diode	20.15..21.20V, Izt=5mA, Zzt=55Ω, 500mW	TURP-FM	7d	1a	Ren
22A	-	SMAJ22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, 11.2A, 400W(1ms)	DO-214AC	1d	1a	Sus
22A	-	SMAJP4KE22A	TVS	Vrwm=18.80V, Vbr=20.90..23.10V, Ipp=13.4A, 400W(1ms)	DO-214AC	1d	1a	Mco
22A	-	SMBG22A	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms)	DO-215AA	5d	1a	Msc
22A	-	SMBJ22A	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms)	DO-214AA	1d	1a	Sus
22A	-	SMBJP6KE22A	TVS	Vrwm=18.80V, Vbr=20.90..23.10V, Ipp=19.9A, 600W(1ms)	DO-214AA	1d	1a	Mco
22A	-	SMCJ1.5KE22A	TVS	Vrwm=18.80V, Vbr=20.90..23.10V, Ipp=49.7A, 1500W(1ms)	DO-214AB	1d	1a	Mco

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
22A	-	SMCJ22A	TVS	Vrwm=22V, Vbr=24.4..28V, 38.1A, 1500W(1ms)	DO-214AB	1d	1k	Sus
22A	-	SMF22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, Ipp=5.6A, 200W(1ms)	SOD-123FL	7d	1a	Mco
22A	-	SZP6SMB22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 20.0A, 600W(1ms)	403A	3d	1s	Ons
22A	-	TVP04A220A-G	TVS	Vbr=20.90..23.10V, Vrwm=18.8V, Ipp=13.07A, 400W(1ms)	DO-214AC	1d	2o	Cmc
22A	-	TVP06B22A-G	TVS	Vrwm=18.8V, Vbr=20.90..23.10V, Ipp=19.61A, 600W(1ms)	DO-214AA	1d	2o	Cmc
22A	-	UMA22A	TVS	Vrwm=22V, Vbr=24.4..35.5V, 14.1A, 500W(1ms)	UltraMite	14d	1v	Msc
22AP	-	15TPSMC22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 49.7A, 1500W(1ms)	DO-214AB	1d	1p	Lif
22AP	-	4TPSMA22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 13.4A, 400W(1ms)	DO-214AC	1d	1p	Lif
22AP	-	6TPSMB22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 19.9A, 600W(1ms)	DO-214AA	1d	1p	Lif
22B	-	1PMT5922B	Zener diode	7.5V±5%, Izt=200mA, 2.5W	DO-216AA	4d	1g	Ons
22B	-	1SMB3EZ22	Zener diode	22V±5%, Zzt=12Ω, Izt=34.0mA, 3W	DO-214AA	1d	1a	Pjt
22B	-	HZF22BP	Zener diode	22V±5%, Iz=10mA, 900mW	LRP	1d	2f	Ren
22B	-	MMHZ5222BPT	Zener diode	2.375..2.625V, Izt=5mA, Zzt=100Ω, 225mW	SOD-123	5d	1a	Chm
22B	-	PTZ22B	Zener diode	22V±10%, Izt=10mA, 1W	DO-214AC	1d	1a	Rhm
22B	-	RKZ22BKU	Zener diode	20.64..21.71V, Izt=5mA, Zzt=55Ω, 500mW	TURP-FM	7d	1a	Ren
22B	-	SMAJ5922B	Zener diode	7.5V±5%, Izt=50.0mA, Zzt=3.0Ω, 1.5W	DO-214AC	1d	1a	Mco
22B	-	Z3SMB22B	Zener diode	20.90..23.10V, Izt=34mA, Zzt=8Ω, 3W	DO-214AA	1d	1a	Ttr
22C	-	1.5SMC22CA	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, Ipp=49A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
22C	-	1.5SMC22CA	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, Ipp=49A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
22C	-	1.5SMC22CA	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, Ipp=49A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
22C	-	F1C2200	TVS	Vrwm=160V, 1A, 500W(1ms)	DO-214AC	1d	1i	Org
22C	-	HZF22CP	Zener diode	22V±10%, Iz=10mA, 900mW	LRP	1d	2f	Ren
22C	-	P4SMA22C	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 13.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
22C	-	P4SMA22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
22C	-	P6SMB22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 20.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
22C	-	P6SMBJ22C	TVS	Vrwm=22V, Vbr=19.8..24.2V, 19A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
22C	-	RKZ22CKU	Zener diode	21.08..22.17V, Izt=5mA, Zzt=55Ω, 500mW	TURP-FM	7d	1a	Ren
22C	-	SMAJP4KE22CA	TVS	Vrwm=18.80V, Vbr=20.90..23.10V, Ipp=13.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
22C	-	SMBG22C	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
22C	-	SMBJP6KE22CA	TVS	Vrwm=18.80V, Vbr=20.90..23.10V, Ipp=19.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
22C	-	SMCJ1.5KE22CA	TVS	Vrwm=18.80V, Vbr=20.90..23.10V, Ipp=49.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
22C	-	TVP04A220CA-G	TVS	Vbr=20.90..23.10V, Vrwm=18.8V, Ipp=13.07A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
22C	-	TVP06B22ACA-G	TVS	Vrwm=18.8V, Vbr=20.90..23.10V, Ipp=19.61A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
22CA	-	1SMC22CA	TVS	Vbr=24.4..26.9V, Vrwm=22V, 42.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
22CA	-	MMF22CA	TVS	Vrwm=22V, Vbr=24.4..28.0V, Ipp=5.6A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
22CA	-	P4SMA22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
22CA	-	P6SMB22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 20.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
22CA	-	P6SMBJ22CA	TVS	Vrwm=22V, Vbr=19.8..24.2V, 20A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
22CA	-	SMAJ22CA	TVS	Vrwm=22V, Vbr=24.4..26.9V, 11.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
22CA	-	SMBG22CA	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
22CA	-	SMBJ22CA	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
22CA	-	SMCJ22CA	TVS	Vrwm=22V, Vbr=24.4..28V, 38.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
22CA	-	SMF22CA	TVS	Vbr=24.4..26.9V, Vrwm=22V, Ipp=5.6A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
22CA	-	UMA22CA	TVS	Vrwm=22V, Vbr=24.4..35.5V, 14.1A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
22CP	-	15TPSMC22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 49.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
22CP	-	4TPSMA22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 13.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1p	Lif
22CP	-	6TPSMB22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 19.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
22D	-	F1C2230	TVS	Vrwm=180V, 600mA, 500W(1ms)	DO-214AC	1d	1i	Org
22D	-	RKZ22DKU	Zener diode	21.52..22.63V, Izt=5mA, Zzt=55Ω, 500mW	TURP-FM	7d	1a	Ren
22D	-	RKZ33DKU	Zener diode	31.49..33.11V, Izt=5mA, Zzt=80Ω, 500mW	TURP-FM	7d	1a	Ren
22F	-	F1C2250	TVS	Vrwm=200V, 600mA, 500W(1ms)	DO-214AC	1d	1i	Org
22G	-	F1C2260	TVS	Vrwm=208V, 600mA,500W(1ms)	DO-214AC	1d	1i	Org
22G	-	ZD22G-CA2	Zener diode	22V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
22G	-	ZD22G-CB2	Zener diode	22V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
22H	-	F1C2270	TVS	Vrwm=216V, 500mA, 500W(1ms)	DO-214AC	1d	1i	Org
22I	-	F1C2280	TVS	Vrwm=224V, 500mA, 500W(1ms)	DO-214AC	1d	1i	Org
22J	-	F1C2290	TVS	Vrwm=232V, 500mA, 500W(1ms)	DO-214AC	1d	1i	Org
22L	-	ZD22L-CA2	Zener diode	22V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
22L	-	ZD22L-CB2	Zener diode	22V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
22LL	-	SSM22LLPT	Si-diode	SBR, 20V, 2A, Vf<0.27V(2A)	DO-214AC	1d	1a	Chm
22P	-	BZD27C22P	Zener diode	20.90..23.10V, Zzt=15Ω, Izt=25mA, 800mW	SOD-123FL	7d	1a	Pjt
22P	-	MFPZ22	Zener diode	20.9..23.1V, Izt=25mA, Zzt=12Ω, 800mW	SOD-123FL	7d	1a	Ttr
22S	-	MMHZ5222SPT	Zener diode	2.450..2.550V, Izt=5mA, Zzt=100Ω, 225mW	SOD-123	5d	1a	Chm
22S	-	SS22S	Si-diode	SBR, 20V, 2A, Vf<0.55V(2A)	DO-214AC	1d	1k	Vs
22V	-	SMA22	TVS	Vbr=24.4..29.8V, Vrwm=22.2V, 7.6A, 300W(1ms)	DO-214AC	1d	1a	Mic
22V	-	SMB22	TVS	Vbr=24.4..29.8V, Vrwm=22V, 15.2A, 600W(1ms)	DO-214AA	1d	1a	Mic
22V	-	SMC22	TVS	Vbr=24.4..29.8V, Vrwm=22V, 38.1A, 1500W(1ms)	DO-214AB	1d	1a	Mic
22VA	-	SMA22A	TVS	Vbr=24.4..26.9V, Vrwm=22.2V, 8.5A, 300W(1ms)	DO-214AC	1d	1a	Mic
22VA	-	SMB22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, 16.9A, 600W(1ms)	DO-214AA	1d	1a	Mic
22VA	-	SMC22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, 42.3A, 1500W(1ms)	DO-214AB	1d	1a	Mic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
22VB	-	BZT52B22	Zener diode	21.56..22.44V, Izt=5mA, Zzt=55Ω, 500mW	SOD-123FL	7d	1a	Tsc
22VB	-	MMSZ22VBW	Zener diode	21.56..22.44V, Izt=5mA, Zzt=55Ω, 500mW	SOD-123FL	7d	1a	Tac
22VC	-	SMA22C	TVS	Vbr=24.4..29.8V, Vrwm=22.2V, 7.6A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
22VC	-	SMB22C	TVS	Vbr=24.4..29.8V, Vrwm=22V, 15.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
22VC	-	SMC22C	TVS	Vbr=24.4..29.8V, Vrwm=22V, 38.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
22VCA	-	SMA22CA	TVS	Vbr=24.4..26.9V, Vrwm=22.2V, 8.5A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
22VCA	-	SMB22CA	TVS	Vbr=24.4..26.9V, Vrwm=22V, 16.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
22VCA	-	SMC22CA	TVS	Vbr=24.4..26.9V, Vrwm=22V, 42.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
22VZ	-	BZT52C22	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 500mW	SOD-123FL	7d	1a	Tsc
22VZ	-	MMSZ22VCW	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 500mW	SOD-123FL	7d	1a	Tac
22VZ	-	TCMMSZ22V	Zener diode	22V±5%, Izt=5mA, Zzt=51Ω, 500mW	SOD-123FL	7d	1a	Tac
22VZ	-	ZGFM0522C-MH	Zener diode	20.90..23.1V, Izt=5mA, Zzt=51Ω, 500mW	SOD-123	5d	1a	Pic
22Z	-	BZD2C250P	Zener diode	220V±5%, Izt=4mA, 1W	DO-219AA	7d	2n	Fag
23	-	FM230-M	Si-diode	SBR, 30V, 2.0A, Vf<0.50V(2A)	SOD-123L	10d	1a	Tfr
23	-	HMSZ5223B	Zener diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOD-323	5d	1d	Hsn
23	-	SS2P3	Si-diode	SBR, 30V, 2A, Vf<0.54V(2A)	DO-220AA	8d	1k	Vs
23	-	ZD5223BS2	Zener diode	2.7V±5%, 20mA, Zzt=30Ω, 500mW	SOD-323	5d	1a	Cys
230C	-	MMSZ5230CW	Zener diode	4.606..4.794V, Izt=20mA, Zzt=19Ω, 500mW	SOD-123FL	7d	1a	Tac
231C	-	MMSZ5231CW	Zener diode	4.998..5.202V, Izt=20mA, Zzt=17Ω, 500mW	SOD-123FL	7d	1a	Tac
232C	-	MMSZ5232CW	Zener diode	5.488..5.712V, Izt=20mA, Zzt=11Ω, 500mW	SOD-123FL	7d	1a	Tac
233C	-	MMSZ5233CW	Zener diode	5.88..6.12V, Izt=20mA, Zzt=7Ω, 500mW	SOD-123FL	7d	1a	Tac
234C	-	MMSZ5234CW	Zener diode	6.076..6.324V, Izt=20mA, Zzt=7Ω, 500mW	SOD-123FL	7d	1a	Tac
235C	-	MMSZ5235CW	Zener diode	6.664..6.936V, Izt=20mA, Zzt=5Ω, 500mW	SOD-123FL	7d	1a	Tac
236C	-	MMSZ5236CW	Zener diode	7.35..7.65V, Izt=20mA, Zzt=6Ω, 500mW	SOD-123FL	7d	1a	Tac
237C	-	MMSZ5237CW	Zener diode	8.036..8.364V, Izt=20mA, Zzt=8Ω, 500mW	SOD-123FL	7d	1a	Tac
238C	-	MMSZ5238CW	Zener diode	8.526..8.874V, Izt=20mA, Zzt=8Ω, 500mW	SOD-123FL	7d	1a	Tac
239C	-	MMSZ5239CW	Zener diode	8.918..9.282V, Izt=20mA, Zzt=10Ω, 500mW	SOD-123FL	7d	1a	Tac
23A	-	F1C2300	TVS	Vrwm=240V, 500mA, 500W(1ms)	DO-214AC	1d	1i	Org
23A	-	P2300SAA	Thy-SPD	Vdrm=190V, Vs=260V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Vs
23B	-	1PMT5923B	Zener diode	8.2V±5%, Izt=182mA, 2.5W	DO-216AA	4d	1g	Ons
23B	-	F1C2310	TVS	Vrwm=248V, 500mA, 500W(1ms)	DO-214AC	1d	1i	Org
23B	-	MMHZ5223BPT	Zener diode	2.565..2.835V, Izt=5mA, Zzt=100Ω, 225mW	SOD-123	5d	1a	Chm
23B	-	SMAJ5923B	Zener diode	8.2V±5%, Izt=45.7mA, Zzt=3.5Ω, 1.5W	DO-214AC	1d	1a	Mco
23C	-	F1C2320	TVS	Vrwm=256V, 500mA, 500W(1ms)	DO-214AC	1d	1i	Org
23D	-	F1C2330	TVS	Vrwm=264V, 500mA, 500W(1ms)	DO-214AC	1d	1i	Org
23L	-	SSA23L	Si-diode	SBR, 30V, 2A, Vf<0.49V(2A)	DO-214AC	1d	1k	Vs
23S	-	MMHZ5223SPT	Zener diode	2.646..2.754V, Izt=5mA, Zzt=100Ω, 225mW	SOD-123	5d	1a	Chm
23S	-	SS23S	Si-diode	SBR, 30V, 2A, Vf<0.55V(2A)	DO-214AC	1d	1k	Vs
24	-	1SR156-400	Si-diode	Rectfier, 400V, 1A, Vf<1.3V(800mA)	SOD-106	1d	1ka	Rhm
24	-	BZY55-C24	Zener diode	22.80..25.20V, Izt=5mA, Zzt=80Ω, 500mW	0805	70d	2d	Tsc
24	-	CDZ55C24	Zener diode	22.80..25.20V, Zzt=80Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
24	-	CDZ55C24S	Zener diode	22.80..25.20V, Zzt=80Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
24	-	CDZ55C24T	Zener diode	22.80..25.20V, Zzt=80Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
24	-	CHSBDJGP	Si-diode	SBD, 40V, 2A, Vf<0.5V(2A), 200pF	SOD-123J	7d	1a	Chm
24	-	CMZ24	Zener diode	24V±5%, Izt=10mA, 2W	M-FLAT	7d	1a	Tos
24	-	CTZ55C24	Zener diode	22.80..25.20V, Izt=5mA, Zzt=80Ω, 500mW	1206	70d	2d	Ctc
24	-	CZRNC55C24-G	Zener diode	22.80..25.20V, Zt=80Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
24	-	CZRSC55C24-G	Zener diode	22.80..25.20V, Zt=80Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
24	-	FM240-M	Si-diode	SBR, 40V, 2.0A, Vf<0.50V(2A)	SOD-123L	10d	1a	Tfr
24	-	HMSZ5224B	Zener diode	2.8V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOD-323	5d	1d	Hsn
24	-	HZC2.4	Zener diode	2.4V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
24	-	KDZ24EV	Zener diode	22.8..25.6V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
24	-	KDZ24V	Zener diode	22.8..25.6V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
24	-	KDZ24VV	Zener diode	22.80..25.60V, Izt=5mA, Zzt=40Ω, 100mW	VSC	7d	1a	Kec
24	-	MAZ5240	Zener diode	22.8..25.6V, Zzt=25Ω(5mA), 500mW	MP2	11d	1a	Pan
24	-	MAZ82400H	Zener diode	24.35..25.6V, Zzt=100Ω(5mA), 150mW	SC-76	6d	1a	Pan
24	-	MAZS240	Zener diode	22.8..25.6V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
24	-	MAZY240	Zener diode	21.6..26.4V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
24	-	MMPZ5252SPT	Zener diode	23.52..24.48V, Izt=5mA, Zzt=62Ω, 225mW	SOD-323	5d	1a	Chm
24	-	P4SMA24	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 12.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
24	-	P6SMBJ24	TVS	Vrwm=24V, Vbr=21.6..26.4V, 17A, 600W(1ms)	DO-214AA	1d	1n	Lif
24	-	SMA3C24	Zener diode	24V±5%, Izt=31mA, Zzt<9Ω, 3W	DO-214AC	1d	1a	Exc
24	-	SMBG24	TVS	Vrwm=24V, Vbr=26.7..33.8V, 14.0A, 600W(1ms)	DO-215AA	5d	1a	Msc
24	-	SML4749	Zener diode	24V±5%, Izt=10.5mA, Zzt=25Ω, 1W	DO-214AC	1d	1k	Vs
24	-	SS2P4	Si-diode	SBR, 40V, 2A, Vf<0.54V(2A)	DO-220AA	8d	1k	Vs
24	-	TZD24WS	Zener diode	22.80..25.60V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Ttr
24	-	TZD24WT	Zener diode	22.80..25.60V, Izt=5mA, Zzt=40Ω, 150mW	SOD-523	6d	1a	Ttr
24	-	TZD24WU	Zener diode	23.72..24.78V, Izt=2mA, Zzt=120Ω, 100mW	SOD-723	7d	1a	Ttr
24	-	U1ZB24	Zener diode	21.6..26.4V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos
24	-	USFZ24V	Zener diode	24V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
24	ah	HZC24	Zener diode	24V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
24	ay	CRZ24	Zener diode	21.6..26.47V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
24-	-	MAZ82400M	Zener diode	23.5..24.7V, Zzt=100Ω(5mA), 150mW	SC-76	6d	1a	Pan
24-	-	MAZ8240GML	Zener diode	23.5..24.7V, Zzt=100Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
24-	-	MAZS2400M	Zener diode	23.5..24.7V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
24/24	ad	SD24C	TVS	Vrwm=24.0V, Vbr=26.7..40V, Ipp=8A, 350W(1ms), Bidir.	SOD-323	5ba	1e	Smt
24^	-	MAZ82400H	Zener diode	24.35..25.6V, Zzt=100Ω(5mA), 150mW	SC-76	6d	1a	Pan
24^	-	MAZ8240GHL	Zener diode	24.35..25.6V, Zzt=100Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
24^	-	MAZS2400H	Zener diode	24.35..25.6V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
24_	-	MAZ82400L	Zener diode	22.8..23.97V, Zzt=100Ω(5mA), 150mW	SC-76	6d	1a	Pan
24_	-	MAZ8240GLL	Zener diode	22.8..23.97V, Zzt=100Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
24_	-	MAZS2400L	Zener diode	22.8..23.97V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
24•	-	RKZ24B2KG	Zener diode	23.72..24.78V, Izt=5mA, Zzt=60Ω, 200mW	URP	5d	2e	Ren
24•	-	RKZ24B2KJ	Zener diode	23.72..24.78V, Izt=5mA, Zzt=60Ω, 150mW	UFP	7d	2e	Ren
24•	-	TZD24YWS	Zener diode	25.60..24.78V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Ttr
24•	-	TZD24YWT	Zener diode	23.72..24.78V, Izt=5mA, Zzt=40Ω, 150mW	SOD-523	6d	1a	Ttr
24•	ai	HZU24B1	Zener diode	22.93..23.96V, Izt=5mA, Zzt=60Ω, 200mW	URP	5d	1a	Ren
24•	aj	HZU24B2	Zener diode	23.72..24.78V, Izt=5mA, Zzt=60Ω, 200mW	URP	5d	1a	Ren
24•	ak	HZU24B3	Zener diode	24.54..25.57V, Izt=5mA, Zzt=60Ω, 200mW	URP	5d	1a	Ren
240	-	MAZX240	Zener diode	216..264V, Zzt=10Ω(0.5mA), 1W	NMiniP2	1d	1a	Pan
240	-	U1ZB240	Zener diode	216..264V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
240C	-	MMSZ5240CW	Zener diode	9.8..10.2V, Izt=20mA, Zzt=17Ω, 500mW	SOD-123FL	7d	1a	Tac
240Y	-	U1ZB240-Y	Zener diode	230..250V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
240Z	-	U1ZB240-Z	Zener diode	240..260V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
241	-	HZU24-1L	Zener diode	22.9..24V, Izt=0.5mA, Zzt=1200Ω, 150mW	URP	5d	1a	Ren
241C	-	MMSZ5241CW	Zener diode	10.78..11.22V, Izt=20mA, Zzt=22Ω, 500mW	SOD-123FL	7d	1a	Tac
242	-	HZU24-2L	Zener diode	23.6..24.7V, Izt=0.5mA, Zzt=120Ω, 150mW	URP	5d	1a	Ren
242C	-	MMSZ5242CW	Zener diode	11.76..12.24V, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tac
243	-	HZU24-3L	Zener diode	24.3..25.5V, Izt=0.5mA, Zzt=120Ω, 150mW	URP	5d	1a	Ren
243C	-	MMSZ5243CW	Zener diode	12.74..13.26V, Izt=9.5mA, Zzt=13Ω, 500mW	SOD-123FL	7d	1a	Tac
244C	-	MMSZ5244CW	Zener diode	13.72..14.28V, Izt=9mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tac
245C	-	MMSZ5245CW	Zener diode	14.7..15.3V, Izt=8.5mA, Zzt=16Ω, 500mW	SOD-123FL	7d	1a	Tac
246C	-	MMSZ5246CW	Zener diode	15.68..16.32V, Izt=7.8mA, Zzt=17Ω, 500mW	SOD-123FL	7d	1a	Tac
247C	-	MMSZ5247CW	Zener diode	16.66..17.34V, Izt=7.4mA, Zzt=19Ω, 500mW	SOD-123FL	7d	1a	Tac
248C	-	MMSZ5248CW	Zener diode	17.64..18.36V, Izt=7mA, Zzt=21Ω, 500mW	SOD-123FL	7d	1a	Tac
249C	-	MMSZ5249CW	Zener diode	18.62..19.38V, Izt=6.6mA, Zzt=23Ω, 500mW	SOD-123FL	7d	1a	Tac
24A	-	1.5SMC24A	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, Ipp=45A, 1500W(1ms)	DO-214AB	1d	2s	Lif
24A	-	1.5SMC24A	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, Ipp=45A, 1500W(1ms)	DO-214AB	1d	1k	Vs
24A	-	1.5SMC24A	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, Ipp=45A, 1500W(1ms)	DO-214AB	1d	1b	Mde
24A	-	1.5SMC24A	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, Ipp=45A, 1500W(1ms)	403	3d	2t	Ons
24A	-	1SMC24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, 38.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
24A	-	MMF24A	TVS	Vrwm=24V, Vbr=26.7..30.7V, Ipp=5.1A, 200W(1ms)	SOD-123FL	7d	2m	Sst
24A	-	P4SMA24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13.0A, 400W(1ms)	DO-214AC	1d	1k	Vs
24A	-	P4SMA24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
24A	-	P6SMB24A	TVS	Vrwm=24V, Vbr=22.8..25.2V, 18.1A, 600W(1ms)	403A	3d	1s	Ons
24A	-	P6SMB24A	TVS	Vrwm=24V, Vbr=22.8..25.2V, 18.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
24A	-	P6SMBJ24A	TVS	Vrwm=24V, Vbr=21.6..26.4V, 18A, 600W(1ms)	DO-214AA	1d	1n	Lif
24A	-	RKZ24AKU	Zener diode	22.05..23.18V, Izt=5mA, Zzt=60Ω, 500mW	TURP-FM	7d	1a	Ren
24A	-	SMAJ24A	TVS	Vrwm=24V, Vbr=26.7..29.5V, 10.3A, 400W(1ms)	DO-214AC	1d	1a	Sus
24A	-	SMAJP4KE24A	TVS	Vrwm=20.50V, Vbr=22.80..25.20V, Ipp=12.3A, 400W(1ms)	DO-214AC	1d	1a	Mco
24A	-	SMBG24A	TVS	Vrwm=24V, Vbr=26.7..30.7V, 15.4A, 600W(1ms)	DO-215AA	5d	1a	Msc
24A	-	SMBJ24A	TVS	Vrwm=24V, Vbr=26.7..30.7V, 15.4A, 600W(1ms)	DO-214AA	1d	1a	Sus
24A	-	SMBJP6KE24A	TVS	Vrwm=20.50V, Vbr=22.80..25.20V, Ipp=18.4A, 600W(1ms)	DO-214AA	1d	1a	Mco
24A	-	SMCJ1.5KE24A	TVS	Vrwm=20.50V, Vbr=22.80..25.20V, Ipp=45.8A, 1500W(1ms)	DO-214AB	1d	1a	Mco
24A	-	SMCJ24A	TVS	Vrwm=24V, Vbr=26.7..30.7V, 34.9A, 1500W(1ms)	DO-214AB	1d	1k	Sus
24A	-	SMF24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, Ipp=5.1A, 200W(1ms)	SOD-123FL	7d	1a	Mco
24A	-	SZP6SMB24A	TVS	Vrwm=24V, Vbr=22.8..25.2V, 18.1A, 600W(1ms)	403A	3d	1s	Ons
24A	-	TVP04A240A-G	TVS	Vbr=22.80..25.20V, Vrwm=20.5V, Ipp=12.05A, 400W(1ms)	DO-214AC	1d	2o	Cmc
24A	-	TVP06B24A-G	TVS	Vrwm=20.5V, Vbr=22.80..25.20V, Ipp=18.07A, 600W(1ms)	DO-214AA	1d	2o	Cmc
24A	-	UMA24A	TVS	Vrwm=24V, Vbr=26.7..38.9V, 12.8A, 500W(1ms)	UltraMite	14d	1v	Msc
24AL	-	SSM24ALPT	Si-diode	SBR, 40V, 2A, Vf<0.37V(2A)	SMA-S	8d	1a	Chm
24AP	-	15TPSMC24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 45.8A, 1500W(1ms)	DO-214AB	1d	1p	Lif
24AP	-	4TPSMA24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 12.3A, 400W(1ms)	DO-214AC	1d	1p	Lif
24AP	-	6TPSMB24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 18.4A, 600W(1ms)	DO-214AA	1d	1p	Lif
24B	-	1PMT5924B	Zener diode	9.1V±5%, Izt=164mA, 2.5W	DO-216AA	4d	1g	Ons
24B	-	1SMB3EZ24	Zener diode	24V±5%, Zzt=13Ω, Izt=31.0mA, 3W	DO-214AA	1d	1a	Pjt
24B	-	HZF24BP	Zener diode	24V±5%, Iz=10mA, 900mW	LRP	1d	2f	Ren
24B	-	MMHZ5224BPT	Zener diode	2.660..2.940V, Izt=5mA, Zzt=100Ω, 225mW	SOD-123	5d	1a	Chm
24B	-	PTZ24B	Zener diode	24V±10%, Izt=10mA, 1W	DO-214AC	1d	1a	Rhm
24B	-	RKZ24BKU	Zener diode	22.61..23.77V, Izt=5mA, Zzt=60Ω, 500mW	TURP-FM	7d	1a	Ren

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
24B	-	SMAJ5924B	Zener diode	9.1V±5%, Izt=41.2mA, Zzt=4.0Ω, 1.5W	DO-214AC	1d	1a	Mco
24B	-	Z3SMB24B	Zener diode	22.80..25.20V, Izt=31mA, Zzt=9Ω, 3W	DO-214AA	1d	1a	Ttr
24C	-	1.5SMC24CA	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, Ipp=45A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
24C	-	1.5SMC24CA	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, Ipp=45A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
24C	-	1.5SMC24CA	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, Ipp=45A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
24C	-	HZF24CP	Zener diode	24V±10%, Iz=10mA, 900mW	LRP	1d	2f	Ren
24C	-	P4SMA24C	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 12.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
24C	-	P4SMA24CA	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
24C	-	P6SMB24CA	TVS	Vrwm=24V, Vbr=22.8..25.2V, 18.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
24C	-	P6SMBJ24C	TVS	Vrwm=24V, Vbr=21.6..26.4V, 17A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
24C	-	RKZ24CKU	Zener diode	23.12..24.31V, Izt=5mA, Zzt=60Ω, 500mW	TURP-FM	7d	1a	Ren
24C	-	SMAJP4KE24CA	TVS	Vrwm=20.50V, Vbr=22.80..25.20V, Ipp=12.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
24C	-	SMBG24C	TVS	Vrwm=24V, Vbr=26.7..33.8V, 14.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
24C	-	SMBJP6KE24CA	TVS	Vrwm=20.50V, Vbr=22.80..25.20V, Ipp=18.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
24C	-	SMCJ1.5KE24CA	TVS	Vrwm=20.50V, Vbr=22.80..25.20V, Ipp=45.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
24C	-	TVP04A240CA-G	TVS	Vbr=22.80..25.20V, Vrwm=20.5V, Ipp=12.05A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
24C	-	TVP06B24ACA-G	TVS	Vrwm=20.5V, Vbr=22.80..25.20V, Ipp=18.07A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
24CA	-	1SMC24CA	TVS	Vbr=26.7..29.5V, Vrwm=24V, 38.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
24CA	-	MMF24CA	TVS	Vrwm=24V, Vbr=26.7..30.7V, Ipp=5.1A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
24CA	-	P4SMA24CA	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
24CA	-	P6SMB24CA	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 18.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
24CA	-	P6SMBJ24CA	TVS	Vrwm=24V, Vbr=21.6..26.4V, 18A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
24CA	-	SMAJ24CA	TVS	Vrwm=24V, Vbr=26.7..29.5V, 10.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
24CA	-	SMBG24CA	TVS	Vrwm=24V, Vbr=26.7..30.7V, 15.4A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
24CA	-	SMBJ24CA	TVS	Vrwm=24V, Vbr=26.7..30.7V, 15.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
24CA	-	SMCJ24CA	TVS	Vrwm=24V, Vbr=26.7..30.7V, 34.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
24CA	-	SMF24CA	TVS	Vbr=26.7..29.5V, Vrwm=24V, Ipp=5.1A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
24CA	-	UMA24CA	TVS	Vrwm=24V, Vbr=26.7..38.9V, 12.8A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
24CP	-	15TPSMC24CA	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 45.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
24CP	-	4TPSMA24CA	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 12.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1p	Lif
24CP	-	6TPSMB24CA	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 18.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
24D	-	RKZ24DKU	Zener diode	23.63..24.85V, Izt=5mA, Zzt=60Ω, 500mW	TURP-FM	7d	1a	Ren
24G	-	ZD24G-CA2	Zener diode	24V±5%, Zzt=120Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
24G	-	ZD24G-CB2	Zener diode	24V±5%, Zzt=120Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
24L	-	ZD24L-CA2	Zener diode	24V±5%, Zzt=120Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
24L	-	ZD24L-CB2	Zener diode	24V±5%, Zzt=120Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
24LA	-	SSM24LAPT	Si-diode	SBR, 40V, 2A, Vf<0.35V(2A)	DO-214AC	1d	1a	Chm
24P	-	BZD27C24P	Zener diode	22.80..25.20V, Zzt=15Ω, Izt=25mA, 800mW	SOD-123FL	7d	1a	Pjt
24P	-	MFPZ24	Zener diode	22.8..25.2V, Izt=25mA, Zzt=12Ω, 800mW	SOD-123FL	7d	1a	Ttr
24R	-	SMD24APT	Si-diode	SBR, 40V, 2A, Vf<0.5V(2A)	SOD-123S	8d	1a	Chm
24S	-	MMHZ5224SPT	Zener diode	2.774..2.856V, Izt=5mA, Zzt=100Ω, 225mW	SOD-123	5d	1a	Chm
24S	-	SS24S	Si-diode	SBR, 40V, 2A, Vf<0.55V(2A)	DO-214AC	1d	1k	Vs
24V	-	SMA24	TVS	Vbr=26.7..32.6V, Vrwm=24.0V, 7A, 300W(1ms)	DO-214AC	1d	1a	Mic
24V	-	SMB24	TVS	Vbr=26.7..32.6V, Vrwm=24V, 14A, 600W(1ms)	DO-214AA	1d	1a	Mic
24V	-	SMC24	TVS	Vbr=26.47..32.6V, Vrwm=24V, 34.9A, 1500W(1ms)	DO-214AB	1d	1a	Mic
24VA	-	SMA24A	TVS	Vbr=26.7..29.5V, Vrwm=24.0V, 7.7A, 300W(1ms)	DO-214AC	1d	1a	Mic
24VA	-	SMB24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, 15.4A, 600W(1ms)	DO-214AA	1d	1a	Mic
24VA	-	SMC24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, 38.6A, 1500W(1ms)	DO-214AB	1d	1a	Mic
24VB	-	BZT52B24	Zener diode	23.52..24.48V, Izt=5mA, Zzt=70Ω, 500mW	SOD-123FL	7d	1a	Tsc
24VB	-	MMSZ24VBW	Zener diode	23.52..24.48V, Izt=5mA, Zzt=70Ω, 500mW	SOD-123FL	7d	1a	Tac
24VC	-	SMA24C	TVS	Vbr=26.7..32.6V, Vrwm=24.0V, 7A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
24VC	-	SMB24C	TVS	Vbr=26.7..32.6V, Vrwm=24V, 14A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
24VC	-	SMC24C	TVS	Vbr=26.47..32.6V, Vrwm=24V, 34.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
24VCA	-	SMA24CA	TVS	Vbr=26.7..29.5V, Vrwm=24.0V, 7.7A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
24VCA	-	SMB24CA	TVS	Vbr=26.7..29.5V, Vrwm=24V, 15.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
24VCA	-	SMC24CA	TVS	Vbr=26.7..29.5V, Vrwm=24V, 38.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
24VZ	-	BZT52C24	Zener diode	22.80..25.20V, Izt=5mA, Zzt=70Ω, 500mW	SOD-123FL	7d	1a	Tsc
24VZ	-	MMSZ24VCW	Zener diode	22.80..25.20V, Izt=5mA, Zzt=70Ω, 500mW	SOD-123FL	7d	1a	Tac
24VZ	-	TCMMSZ24V	Zener diode	24V±5%, Izt=5mA, Zzt=65Ω, 500mW	SOD-123FL	7d	1a	Tac
24VZ	-	ZGFM0524C-MH	Zener diode	22.80..25.2V, Izt=5mA, Zzt=65Ω, 500mW	SOD-123	5d	1a	Pic
24W	-	SD24	TVS	Vrwm=24.0V, Vbr=26.7..40V, Ipp=8A, 500W(1ms)	SOD-323	5d	1a	Ldt
25	-	BZX584B3V0	Zener diode	2.94..3.06V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523FL	7d	1a	Tac
25	-	EDZ12B	Zener diode	11.74..12.24V, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Rhm
25	-	EDZV12B	Zener diode	11.74..12.24V, Izt=5.0mA, Zzt=30Ω, 150mW	SOD-523	6d	2v	Rhm
25	-	FDZ12EV	Zener diode	11.740..12.240V, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Fis
25	-	FDZ12VT	Zener diode	11.740..12.240V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Fis
25	-	GDZ2V4B-V-G	Zener diode	2.43..2.63V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	2m	Vs
25	-	HMSZ5225B	Zener diode	3V±5%, Izt=20mA, Zzt=29Ω, 225mW	SOD-323	5d	1d	Hsn
25	-	KL3R25	Thy-SPD	V Of-St=220V, Ifsm=30A(1ms), Ih=100mA, Bidir.	1F	1ba	1l	Shi
25	-	LBZT52B12T1G	Zener diode	11.74..12.24V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
25	-	LEDZ12BT1G	Zener diode	11.74..12.24V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
25	-	LUDZS12BT1G	Zener diode	11.74..12.24V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
25	-	MM5Z3V0B	Zener diode	2.94..3.06V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523FL	7d	1a	Tac
25	-	MMPZ5253SPT	Zener diode	24.50..25.50V, Izt=5mA, Zzt=62Ω, 225mW	SOD-323	5d	1a	Chm
25	-	SS2P5	Si-diode	SBR, 50V, 2A, Vf<0.7V(2A)	DO-220AA	8d	1k	Vs
25	-	TDZ12B	Zener diode	12V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
25	-	UDZS12B	Zener diode	11.74..12.24V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Wtr
25	-	UDZS12B	Zener diode	12V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
25	-	UDZV12B	Zener diode	11.74..12.24V, Izt=5.0mA, Zzt=30Ω, 200mW	SOD-323	5d	2v	Rhm
25	-	VDZS12B	Zener diode	12V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
25	-	ZD5225BS2	Zener diode	3.0V±5%, 20mA, Zzt=29Ω, 500mW	SOD-323	5d	1a	Cys
250	-	P4SMA250	TVS	Vbr=225..275V, Vrwm=202V, 1.11A, 400W(1ms)	DO-214AC	1d	1a	Eic
250A	-	1.5SMC250A	TVS	Vrwm=214V, Vbr=237..263V, Ipp=4.5A, 1500W(1ms)	DO-214AB	1d	1b	Mde
250A	-	1.5SMC250A	TVS	Vrwm=214V, Vbr=237..263V, Ipp=4.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
250A	-	1.5SMC250A	TVS	Vrwm=214V, Vbr=237..263V, Ipp=4.5A, 1500W(1ms)	DO-214AB	1d	2s	Lif
250A	-	P4SMA250A	TVS	Vbr=237..263V, Vrwm=214V, 0.91A, 400W (1ms)	DO-214AC	1d	1a	Eic
250A	-	P4SMA250A	TVS	Vbr=237..263V, Vrwm=214V, 1.16A, 400W(1ms)	DO-214AC	1d	1k	Vs
250A	-	P6SMB150A	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms)	403A	3d	1s	Ons
250A	-	P6SMB250A	TVS	Vbr=237..263V, Vrwm=214V, 1.75A, 600W(1ms)	DO-214AA	1d	1k	Vs
250A	-	SMAJP4KE250A	TVS	Vrwm=214.0V, Vbr=237.0..263.0V, Ipp=1.2A, 400W(1ms)	DO-214AC	1d	1a	Mco
250A	-	SMBJP6KE250A	TVS	Vrwm=214.0V, Vbr=237.0..263.0V, Ipp=1.9A, 600W(1ms)	DO-214AA	1d	1a	Mco
250A	-	SMCJ1.5KE250A	TVS	Vrwm=214.0V, Vbr=237.0..263.0V, Ipp=4.4A, 1500W(1ms)	DO-214AB	1d	1a	Mco
250A	-	SZP6SMB150A	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms)	403A	3d	1s	Ons
250A	-	TVP04A251A-G	TVS	Vbr=237.50..262.50V, Vrwm=214.0V, Ipp=1.16A, 400W(1ms)	DO-214AC	1d	2o	Cmc
250A	-	TVP06B251A-G	TVS	Vrwm=214.0V, Vbr=237.50..262.50V, Ipp=1.74A, 600W(1ms)	DO-214AA	1d	2o	Cmc
250C	-	1.5SMC250CA	TVS	Vrwm=214V, Vbr=237..263V, Ipp=4.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
250C	-	1.5SMC250CA	TVS	Vrwm=214V, Vbr=237..263V, Ipp=4.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Fee
250C	-	1.5SMC250CA	TVS	Vrwm=214V, Vbr=237..263V, Ipp=4.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
250C	-	MMSZ5250CW	Zener diode	19.6..20.4V, Izt=6.2mA, Zzt=25Ω, 500mW	SOD-123FL	7d	1a	Tac
250C	-	P4SMA250C	TVS	Vbr=225..275V, Vrwm=202V, 1.11A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
250C	-	SMAJP4KE250CA	TVS	Vrwm=214.0V, Vbr=237.0..263.0V, Ipp=1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
250C	-	SMBJP6KE250CA	TVS	Vrwm=214.0V, Vbr=237.0..263.0V, Ipp=1.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
250C	-	SMCJ1.5KE250CA	TVS	Vrwm=214.0V, Vbr=237.0..263.0V, Ipp=4.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
250C	-	TVP04A251CA-G	TVS	Vbr=237.50..262.50V, Vrwm=214.0V, Ipp=1.16A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
250C	-	TVP06B251ACA-G	TVS	Vrwm=214.0V, Vbr=237.50..262.50V, Ipp=1.74A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
250CA	-	P4SMA250CA	TVS	Vbr=237..263V, Vrwm=214V, 1.16A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
250CA	-	P6SMB250CA	TVS	Vbr=237..263V, Vrwm=214V, 1.75A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
2510	-	SZ2510	Zener diode	10V±5%, Izt=25mA, Zzt=7.0Ω, 1.3W	DO-214AC	1d	1a	Eic
2511	-	SZ2511	Zener diode	11V±5%, Izt=20mA, Zzt=8.0Ω, 1.3W	DO-214AC	1d	1a	Eic
2512	-	SZ2512	Zener diode	12V±5%, Izt=20mA, Zzt=9.0Ω, 1.3W	DO-214AC	1d	1a	Eic
2513	-	SZ2513	Zener diode	13V±5%, Izt=20mA, Zzt=10Ω, 1.3W	DO-214AC	1d	1a	Eic
2515	-	SZ2515	Zener diode	15V±5%, Izt=15mA, Zzt=15Ω, 1.3W	DO-214AC	1d	1a	Eic
2516	-	SZ2516	Zener diode	16V±5%, Izt=15mA, Zzt=15Ω, 1.3W	DO-214AC	1d	1a	Eic
2518	-	SZ2518	Zener diode	18V±5%, Izt=15mA, Zzt=20Ω, 1.3W	DO-214AC	1d	1a	Eic
251C	-	MMSZ5251CW	Zener diode	21.56..22.44V, Izt=5.6mA, Zzt=29Ω, 500mW	SOD-123FL	7d	1a	Tac
2520	-	SZ2520	Zener diode	20V±5%, Izt=10mA, Zzt=24Ω, 1.3W	DO-214AC	1d	1a	Eic
2522	-	SZ2522	Zener diode	22V±5%, Izt=10mA, Zzt=25Ω, 1.3W	DO-214AC	1d	1a	Eic
2524	-	SZ2524	Zener diode	24V±5%, Izt=10mA, Zzt=25Ω, 1.3W	DO-214AC	1d	1a	Eic
2527	-	SZ2527	Zener diode	27V±5%, Izt=8.0mA, Zzt=30Ω, 1.3W	DO-214AC	1d	1a	Eic
252C	-	MMSZ5252CW	Zener diode	23.52..24.48V, Izt=5.2mA, Zzt=33Ω, 500mW	SOD-123FL	7d	1a	Tac
252H	-	SZ252H	Zener diode	2.7V±5%, Izt=80mA, Zzt=20Ω, 1.3W	DO-214AC	1d	1a	Eic
2530	-	SZ2530	Zener diode	30V±5%, Izt=8.0mA, Zzt=30Ω, 1.3W	DO-214AC	1d	1a	Eic
2533	-	SZ2533	Zener diode	33V±5%, Izt=8.0mA, Zzt=35Ω, 1.3W	DO-214AC	1d	1a	Eic
2536	-	SZ2536	Zener diode	36V±5%, Izt=8.0mA, Zzt=40Ω, 1.3W	DO-214AC	1d	1a	Eic
2539	-	SZ2539	Zener diode	39V±5%, Izt=6.0mA, Zzt=50Ω, 1.3W	DO-214AC	1d	1a	Eic
253A	-	SZ253A	Zener diode	3.0V±5%, Izt=80mA, Zzt=20Ω, 1.3W	DO-214AC	1d	1a	Eic
253C	-	MMSZ5253CW	Zener diode	24.5..25.5V, Izt=5mA, Zzt=35Ω, 500mW	SOD-123FL	7d	1a	Tac
253D	-	SZ253D	Zener diode	3.3V±5%, Izt=80mA, Zzt=20Ω, 1.3W	DO-214AC	1d	1a	Eic
253G	-	SZ253G	Zener diode	3.6V±5%, Izt=70mA, Zzt=20Ω, 1.3W	DO-214AC	1d	1a	Eic
253J	-	SZ253J	Zener diode	3.9V±5%, Izt=60mA, Zzt=15Ω, 1.3W	DO-214AC	1d	1a	Eic
2543	-	SZ2543	Zener diode	43V±5%, Izt=6.0mA, Zzt=50Ω, 1.3W	DO-214AC	1d	1a	Eic
2547	-	SZ2547	Zener diode	47V±5%, Izt=4.0mA, Zzt=90Ω, 1.3W	DO-214AC	1d	1a	Eic
254C	-	MMSZ5254CW	Zener diode	26.46..27.54V, Izt=4.6mA, Zzt=41Ω, 500mW	SOD-123FL	7d	1a	Tac
254D	-	SZ254D	Zener diode	4.3V±5%, Izt=50mA, Zzt=13Ω, 1.3W	DO-214AC	1d	1a	Eic
254H	-	SZ254H	Zener diode	4.7V±5%, Izt=45mA, Zzt=13Ω, 1.3W	DO-214AC	1d	1a	Eic
2551	-	SZ2551	Zener diode	51V±5%, Izt=4.0mA, Zzt=115Ω, 1.3W	DO-214AC	1d	1a	Eic
2556	-	SZ2556	Zener diode	56V±5%, Izt=4.0mA, Zzt=120Ω, 1.3W	DO-214AC	1d	1a	Eic
255B	-	SZ255B	Zener diode	5.1V±5%, Izt=45mA, Zzt=10Ω, 1.3W	DO-214AC	1d	1a	Eic
255C	-	MMSZ5255CW	Zener diode	27.44..28.56V, Izt=4.5mA, Zzt=44Ω, 500mW	SOD-123FL	7d	1a	Tac
255G	-	SZ255G	Zener diode	5.6V±5%, Izt=45mA, Zzt=7.0Ω, 1.3W	DO-214AC	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
2562	-	SZ2562	Zener diode	62V±5%, Izt=4.0mA, Zzt=125Ω, 1.3W	DO-214AC	1d	1a	Eic
2568	-	SZ2568	Zener diode	68V±5%, Izt=4.0mA, Zzt=130Ω, 1.3W	DO-214AC	1d	1a	Eic
256C	-	MMSZ5256CW	Zener diode	29.4..30.6V, Izt=4.2mA, Zzt=49Ω, 500mW	SOD-123FL	7d	1a	Tac
256C	-	SZ256C	Zener diode	6.2V±5%, Izt=35mA, Zzt=4.0Ω, 1.3W	DO-214AC	1d	1a	Eic
256I	-	SZ256I	Zener diode	6.8V±5%, Izt=35mA, Zzt=3.5Ω, 1.3W	DO-214AC	1d	1a	Eic
2575	-	SZ2575	Zener diode	75V±5%, Izt=4.0mA, Zzt=135Ω, 1.3W	DO-214AC	1d	1a	Eic
257C	-	MMSZ5257CW	Zener diode	32.34..33.66V, Izt=3.8mA, Zzt=58Ω, 500mW	SOD-123FL	7d	1a	Tac
257F	-	SZ257F	Zener diode	7.5V±5%, Izt=35mA, Zzt=3.0Ω, 1.3W	DO-214AC	1d	1a	Eic
2582	-	SZ2582	Zener diode	82V±5%, Izt=2.7mA, Zzt=200Ω, 1.3W	DO-214AC	1d	1a	Eic
258C	-	MMSZ5258CW	Zener diode	35.28..36.72V, Izt=3.4mA, Zzt=70Ω, 500mW	SOD-123FL	7d	1a	Tac
258C	-	SZ258C	Zener diode	8.2V±5%, Izt=25mA, Zzt=5.0Ω, 1.3W	DO-214AC	1d	1a	Eic
2591	-	SZ2591	Zener diode	91V±5%, Izt=2.7mA, Zzt=250Ω, 1.3W	DO-214AC	1d	1a	Eic
259B	-	SZ259B	Zener diode	9.1V±5%, Izt=25mA, Zzt=5.0Ω, 1.3W	DO-214AC	1d	1a	Eic
259C	-	MMSZ5259CW	Zener diode	38.22..39.78V, Izt=3.2mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tac
25B	-	1PMT5925B	Zener diode	10V±5%, Izt=150mA, 2.5W	DO-216AA	4d	1g	Ons
25B	-	MMHZ5225BPT	Zener diode	2.850..3.150V, Izt=5mA, Zzt=95Ω, 225mW	SOD-123	5d	1a	Chm
25B	-	SMAJ5925B	Zener diode	10V±5%, Izt=37.5mA, Zzt=4.5Ω, 1.5W	DO-214AC	1d	1a	Mco
25B	-	Z3SMB25B	Zener diode	23.75..26.25V, Izt=30mA, Zzt=10Ω, 3W	DO-214AA	1d	1a	Ttr
25B0	-	SZ25B0	Zener diode	100V±5%, Izt=2.7mA, Zzt=350Ω, 1.3W	DO-214AC	1d	1a	Eic
25B1	-	SZ25B1	Zener diode	110V±5%, Izt=2.7mA, Zzt=450Ω, 1.3W	DO-214AC	1d	1a	Eic
25B2	-	SZ25B2	Zener diode	120V±5%, Izt=2.0mA, Zzt=550Ω, 1.3W	DO-214AC	1d	1a	Eic
25B3	-	SZ25B3	Zener diode	130V±5%, Izt=2.0mA, Zzt=700Ω, 1.3W	DO-214AC	1d	1a	Eic
25B5	-	SZ25B5	Zener diode	150V±5%, Izt=2.0mA, Zzt=1000Ω, 1.3W	DO-214AC	1d	1a	Eic
25B6	-	SZ25B6	Zener diode	160V±5%, Izt=1.5mA, Zzt=1100Ω, 1.3W	DO-214AC	1d	1a	Eic
25B8	-	SZ25B8	Zener diode	180V±5%, Izt=1.5mA, Zzt=1200Ω, 1.3W	DO-214AC	1d	1a	Eic
25D0	-	SZ25D0	Zener diode	200V±5%, Izt=1.5mA, Zzt=1500Ω, 1.3W	DO-214AC	1d	1a	Eic
25G	-	ZD25G-CA2	Zener diode	25V±5%, Zzt=130Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
25G	-	ZD25G-CB2	Zener diode	25V±5%, Zzt=130Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
25L	-	ZD25L-CA2	Zener diode	25V±5%, Zzt=130Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
25L	-	ZD25L-CB2	Zener diode	25V±5%, Zzt=130Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
25P	-	BZD27C25P	Zener diode	23.75..26.25V, Zzt=15Ω, Izt=25mA, 800mW	SOD-123FL	7d	1a	Pjt
25P	-	MFPZ25	Zener diode	23.75..26.25V, Izt=25mA, Zzt=12Ω, 800mW	SOD-123FL	7d	1a	Ttr
25S	-	MMHZ5225SPT	Zener diode	2.940..3.060V, Izt=5mA, Zzt=95Ω, 225mW	SOD-123	5d	1a	Chm
25S	-	SS25S	Si-diode	SBR, 50V, 2A, Vf<0.75V(2A)	DO-214AC	1d	1k	Vs
26	-	CHSBFJGP	Si-diode	SBD, 60V, 2A, Vf<0.65V(2A), 200pF	SOD-123J	7d	1a	Chm
26	-	FM260-M	Si-diode	SBR, 60V, 2.0A, Vf<0.70V(2A)	SOD-123L	10d	1a	Tfr
26	-	HMSZ5226B	Zener diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 225mW	SOD-323	5d	1d	Hsn
26	-	SMBG26	TVS	Vrwm=26V, Vbr=28.9..36.6V, 12.4A, 600W(1ms)	DO-215AA	5d	1a	Msc
26	-	SMD26APT	Si-diode	SBR, 60V, 2A, Vf<0.65V(2A)	SOD-123S	8d	1a	Chm
26	-	SS2P6	Si-diode	SBR, 60V, 2A, Vf<0.7V(2A)	DO-220AA	8d	1k	Vs
26	-	ZD5226BS2	Zener diode	3.3V±5%, 20mA, Zzt=28Ω, 500mW	SOD-323	5d	1a	Cys
260C	-	MMSZ5260CW	Zener diode	42.14..43.86V, Izt=3mA, Zzt=93Ω, 500mW	SOD-123FL	7d	1a	Tac
261C	-	MMSZ5261CW	Zener diode	46.06..47.94V, Izt=2.7mA, Zzt=105Ω, 500mW	SOD-123FL	7d	1a	Tac
262C	-	MMSZ5262CW	Zener diode	49.98..52.02V, Izt=2.5mA, Zzt=125Ω, 500mW	SOD-123FL	7d	1a	Tac
263C	-	MMSZ5263CW	Zener diode	54.88..57.12V, Izt=2.2mA, Zzt=150Ω, 500mW	SOD-123FL	7d	1a	Tac
264C	-	MMSZ5264CW	Zener diode	58.8..61.2V, Izt=2.1mA, Zzt=170Ω, 500mW	SOD-123FL	7d	1a	Tac
265C	-	MMSZ5265CW	Zener diode	60.76..63.24V, Izt=2.0mA, Zzt=185Ω, 500mW	SOD-123FL	7d	1a	Tac
266C	-	MMSZ5266CW	Zener diode	66.64..69.36V, Izt=1.8mA, Zzt=230Ω, 500mW	SOD-123FL	7d	1a	Tac
267C	-	MMSZ5267CW	Zener diode	73.5..76.5V, Izt=1.7mA, Zzt=270Ω, 500mW	SOD-123FL	7d	1a	Tac
26A	-	1SMC26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, 35.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
26A	-	MMF26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, Ipp=4.8A, 200W(1ms)	SOD-123FL	7d	2m	Sst
26A	-	P2600SAA	Thy-SPD	Vdrm=220V, Vs=300V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Vs
26A	-	SMAJ26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, 9.5A, 400W(1ms)	DO-214AC	1d	1a	Sus
26A	-	SMBG26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, 14.2A, 600W(1ms)	DO-215AA	5d	1a	Msc
26A	-	SMBJ26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, 14.2A, 600W(1ms)	DO-214AA	1d	1a	Sus
26A	-	SMCJ26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, 32.2A, 1500W(1ms)	DO-214AB	1d	1k	Sus
26A	-	SMF26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, Ipp=4.8A, 200W(1ms)	SOD-123FL	7d	1a	Mco
26A	-	UMA26A	TVS	Vrwm=26V, Vbr=28.9..42.1V, 11.9A, 500W(1ms)	UltraMite	14d	1v	Msc
26B	-	MMHZ5226BPT	Zener diode	3.135..3.465V, Izt=5mA, Zzt=95Ω, 225mW	SOD-123	5d	1a	Chm
26B	-	SMAJ5926B	Zener diode	11V±5%, Izt=34.1mA, Zzt=5.5Ω, 1.5W	DO-214AC	1d	1a	Mco
26C	-	SMBG26C	TVS	Vrwm=26V, Vbr=28.9..36.6V, 12.4A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
26CA	-	1SMC26CA	TVS	Vbr=28.9..31.9V, Vrwm=26V, 35.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
26CA	-	MMF26CA	TVS	Vrwm=26V, Vbr=28.9..33.2V, Ipp=4.8A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
26CA	-	SMAJ26CA	TVS	Vrwm=26V, Vbr=28.9..31.9V, 9.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
26CA	-	SMBG26CA	TVS	Vrwm=26V, Vbr=28.9..33.2V, 14.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
26CA	-	SMBJ26CA	TVS	Vrwm=26V, Vbr=28.9..33.2V, 14.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
26CA	-	SMCJ26CA	TVS	Vrwm=26V, Vbr=28.9..33.2V, 32.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
26CA	-	SMF26CA	TVS	Vbr=28.9..31.9V, Vrwm=26V, Ipp=4.8A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
26CA	-	UMA26CA	TVS	Vrwm=26V, Vbr=28.9..42.1V, 11.9A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
26S	-	MMHZ5226SPT	Zener diode	3.234..3.366V, Izt=5mA, Zzt=95Ω, 225mW	SOD-123	5d	1a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
26S	-	SS26S	Si-diode	SBR, 60V, 2A, Vf<0.75V(2A)	DO-214AC	1d	1k	Vs
26V	-	SMA26	TVS	Vbr=28.9..35.3V, Vrwm=26.0V, 6.4A, 300W(1ms)	DO-214AC	1d	1a	Mic
26V	-	SMB26	TVS	Vbr=28.9..35.3V, Vrwm=26V, 12.9A, 600W(1ms)	DO-214AA	1d	1a	Mic
26V	-	SMC26	TVS	Vbr=28.9..35.3V, Vrwm=26V, 32.2A, 1500W(1ms)	DO-214AB	1d	1a	Mic
26VA	-	SMA26A	TVS	Vbr=28.9..31.9V, Vrwm=26.0V, 7.1A, 300W(1ms)	DO-214AC	1d	1a	Mic
26VA	-	SMB26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, 14.3A, 600W(1ms)	DO-214AA	1d	1a	Mic
26VA	-	SMC26A	TVS	Vbr=28.9..31.9V, Vrwm=26 5 35.6A, 1500W(1ms)	DO-214AB	1d	1a	Mic
26VC	-	SMA26C	TVS	Vbr=28.9..35.3V, Vrwm=26.0V, 6.4A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
26VC	-	SMB26C	TVS	Vbr=28.9..35.3V, Vrwm=26V, 12.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
26VC	-	SMC26C	TVS	Vbr=28.9..35.3V, Vrwm=26V, 32.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
26VCA	-	SMA26CA	TVS	Vbr=28.9..31.9V, Vrwm=26.0V, 7.1A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
26VCA	-	SMB26CA	TVS	Vbr=28.9..31.9V, Vrwm=26V, 14.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
26VCA	-	SMC26CA	TVS	Vbr=28.9..31.9V, Vrwm=26 5 35.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
27	-	BZY55-C27	Zener diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 500mW	0805	70d	2d	Tsc
27	-	CDZ55C27	Zener diode	25.65..28.35V, Zzt=80Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
27	-	CDZ55C27S	Zener diode	25.65..28.35V, Zzt=80Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
27	-	CDZ55C27T	Zener diode	25.65..28.35V, Zzt=80Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
27	-	CMZ27	Zener diode	27V±5%, Izt=10mA, 2W	M-FLAT	7d	1a	Tos
27	-	CTZ55C27	Zener diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 500mW	1206	70d	2d	Ctc
27	-	CZRNC55C27-G	Zener diode	25.65..28.35V, Zt=80Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
27	-	CZRSC55C27-G	Zener diode	25.65..28.35V, Zt=80Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
27	-	HMSZ5227B	Zener diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 225mW	SOD-323	5d	1d	Hsn
27	-	HZC2.7	Zener diode	2.7V±10%, Iz=2mA, 150mW	SOD-523	6d	1a	Ren
27	-	KDZ27VV	Zener diode	25.10..28.90V, Izt=2mA, Zzt=150Ω, 100mW	VSC	7d	1a	Kec
27	-	MAZ82700H	Zener diode	27.3..28.7V, Zzt=120Ω(2mA), 150mW	SC-76	6d	1a	Pan
27	-	MAZS270	Zener diode	25.1..28.9V, Iz=5mA, 200mW	SOD-523	8d	1a	Pan
27	-	MAZY270	Zener diode	24.3..29.7V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
27	-	MMPZ5254SPT	Zener diode	26.46..27.54V, Izt=5mA, Zzt=70Ω, 225mW	SOD-323	5d	1a	Chm
27	-	P4SMA27	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 11.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
27	-	P6SMBJ27	TVS	Vrwm=27V, Vbr=24.3..29.7V, 15A, 600W(1ms)	DO-214AA	1d	1n	Lif
27	-	SMA3C27	Zener diode	27V±5%, Izt=28mA, Zzt<10Ω, 3W	DO-214AC	1d	1a	Exc
27	-	SML4750	Zener diode	27V±5%, Izt=9.5mA, Zzt=35Ω, 1W	DO-214AC	1d	1k	Vs
27	-	TZD27WU	Zener diode	26.19..27.53V, Izt=2mA, Zzt=150Ω, 100mW	SOD-723	7d	1a	Ttr
27	-	U1ZB27	Zener diode	24.3..29.7V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos
27	-	USFZ27V	Zener diode	27V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
27	-	ZD5227BS2	Zener diode	3.6V±5%, 20mA, Zzt=24Ω, 500mW	SOD-323	5d	1a	Cys
27	ah	HZC27	Zener diode	27V±10%, Iz=2mA, 150mW	SOD-523	6d	1a	Ren
27	ay	CRZ27	Zener diode	24.3., 29.7V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
27-	-	MAZ82700M	Zener diode	26.3..27.7V, Zzt=120Ω(2mA), 150mW	SC-76	6d	1a	Pan
27-	-	MAZ8270GML	Zener diode	26.3..27.7V, Zzt=120Ω(2mA), 150mW	SMini2-F3	6d	1a	Pan
27-	-	MAZS2700M	Zener diode	26.3..27.7V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
27^	-	MAZ82700H	Zener diode	27.3..28.7V, Zzt=120Ω(2mA), 150mW	SC-76	6d	1a	Pan
27^	-	MAZ8270GHL	Zener diode	27.3..28.7V, Zzt=120Ω(2mA), 150mW	SMini2-F3	6d	1a	Pan
27^	-	MAZS2700H	Zener diode	27.3..28.7V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
27_	-	MAZ82700L	Zener diode	25.3..26.7V, Zzt=120Ω(2mA), 150mW	SC-76	6d	1a	Pan
27_	-	MAZ8270GLL	Zener diode	25.3..26.7V, Zzt=120Ω(2mA), 150mW	SMini2-F3	6d	1a	Pan
27_	-	MAZS2700L	Zener diode	25.3..26.7V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
27•	-	RKZ27BKG	Zener diode	25.10..28.90V, Izt=2mA, Zzt=70Ω, 200mW	URP	5d	2e	Ren
27•	-	RKZ27BKJ	Zener diode	25.10..28.9V, Izt=2mA, Zzt=70Ω, 150mW	UFP	7d	2e	Ren
27•	aj	HZU27B	Zener diode	25.10..28.90V, Izt=2mA, Zzt=70Ω, 200mW	URP	5d	1a	Ren
270	-	MAZX270	Zener diode	243..297V, Zzt=5Ω(0.5mA), 1W	NMiniP2	1d	1a	Pan
270	-	U1ZB270	Zener diode	243..297V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
270X	-	U1ZB270-X	Zener diode	250..270V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
270Y	-	U1ZB270-Y	Zener diode	260..280V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
270Z	-	U1ZB270-Z	Zener diode	270..290V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
271	-	HZU27-1L	Zener diode	25.2..26.6V, Izt=0.5mA, Zzt=150Ω, 150mW	URP	5d	1a	Ren
272	-	HZU27-2L	Zener diode	26.2..27.6V, Izt=0.5mA, Zzt=150Ω, 150mW	URP	5d	1a	Ren
273	-	HZU27-3L	Zener diode	27.2..28.6V, Izt=0.5mA, Zzt=150Ω, 150mW	URP	5d	1a	Ren
274	-	P6SMB27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.0A, 600W(1ms)	403A	3d	1s	Ons
274	-	SZP6SMB27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.0A, 600W(1ms)	403A	3d	1s	Ons
27A	-	1.5SMC27A	TVS	Vrwm=23.1V, Vbr=25.7..28.4 V, Ipp=40A, 1500W(1ms)	403	3d	2t	Ons
27A	-	1.5SMC27A	TVS	Vrwm=23.1V, Vbr=25.7..28.4 V, Ipp=40A, 1500W(1ms)	DO-214AB	1d	2s	Lif
27A	-	1.5SMC27A	TVS	Vrwm=23.1V, Vbr=25.7..28.4 V, Ipp=40A, 1500W(1ms)	DO-214AB	1d	1k	Vs
27A	-	1.5SMC27A	TVS	Vrwm=23.1V, Vbr=25.7..28.4 V, Ipp=40A, 1500W(1ms)	DO-214AB	1d	1b	Mde
27A	-	P4SMA27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
27A	-	P4SMA27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 400W(1ms)	DO-214AC	1d	1k	Vs
27A	-	P6SMB27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
27A	-	P6SMBJ27A	TVS	Vrwm=27V, Vbr=24.3..29.7V, 16A, 600W(1ms)	DO-214AA	1d	1n	Lif
27A	-	RKZ27AKU	Zener diode	24.26..25.52V, Izt=5mA, Zzt=70Ω, 500mW	TURP-FM	7d	1a	Ren
27A	-	SMAJP4KE27A	TVS	Vrwm=23.10V, Vbr=25.70..28.40V, Ipp=10.9A, 400W(1ms)	DO-214AC	1d	1a	Mco

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
27A	-	SMBJP6KE27A	TVS	Vrwm=23.10V, Vbr=25.70..28.40V, Ipp=16.3A, 600W(1ms)	DO-214AA	1d	1a	Mco
27A	-	SMCJ1.5KE27A	TVS	Vrwm=23.10V, Vbr=25.70..28.40V, Ipp=40.5A, 1500W(1ms)	DO-214AB	1d	1a	Mco
27A	-	TVP04A270A-G	TVS	Vbr=25.65..28.35V, Vrwm=23.1V, Ipp=10.67A, 400W(1ms)	DO-214AC	1d	2o	Cmc
27A	-	TVP06B27A-G	TVS	Vrwm=23.1V, Vbr=25.65..28.35V, Ipp=16.0A, 600W(1ms)	DO-214AA	1d	2o	Cmc
27AP	-	15TPSMC27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 40.5A, 1500W(1ms)	DO-214AB	1d	1p	Lif
27AP	-	4TPSMA27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 10.9A, 400W(1ms)	DO-214AC	1d	1p	Lif
27AP	-	6TPSMB27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.3A, 600W(1ms)	DO-214AA	1d	1p	Lif
27B	-	1PMT5927B	Zener diode	12V±5%, Izt=125mA, 2.5W	DO-216AA	4d	1g	Ons
27B	-	1SMB3EZ27	Zener diode	27V±5%, Zzt=18Ω, Izt=28.0mA, 3W	DO-214AA	1d	1a	Pjt
27B	-	HZF27BP	Zener diode	27V±5%, Iz=10mA, 900mW	LRP	1d	2f	Ren
27B	-	MMHZ5227BPT	Zener diode	3.420..3.780V, Izt=5mA, Zzt=90Ω, 225mW	SOD-123	5d	1a	Chm
27B	-	PTZ27B	Zener diode	27V±10%, Izt=10mA, 1W	DO-214AC	1d	1a	Rhm
27B	-	RKZ27BKU	Zener diode	24.97..26.26V, Izt=5mA, Zzt=70Ω, 500mW	TURP-FM	7d	1a	Ren
27B	-	SMAJ5927B	Zener diode	12V±5%, Izt=31.2mA, Zzt=6.5Ω, 1.5W	DO-214AC	1d	1a	Mco
27B	-	Z3SMB27B	Zener diode	25.65..28.35V, Izt=28mA, Zzt=10Ω, 3W	DO-214AA	1d	1a	Ttr
27C	-	1.5SMC27CA	TVS	Vrwm=23.1V, Vbr=25.7..28.4 V, Ipp=40A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
27C	-	1.5SMC27CA	TVS	Vrwm=23.1V, Vbr=25.7..28.4 V, Ipp=40A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
27C	-	1.5SMC27CA	TVS	Vrwm=23.1V, Vbr=25.7..28.4 V, Ipp=40A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
27C	-	HZF27CP	Zener diode	27V±10%, Iz=10mA, 900mW	LRP	1d	2f	Ren
27C	-	P4SMA27C	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 11.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
27C	-	P4SMA27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
27C	-	P6SMB27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
27C	-	P6SMBJ27C	TVS	Vrwm=27V, Vbr=24.3..29.7V, 15A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
27C	-	RKZ27CKU	Zener diode	25.63..26.95V, Izt=5mA, Zzt=70Ω, 500mW	TURP-FM	7d	1a	Ren
27C	-	SMAJP4KE27CA	TVS	Vrwm=23.10V, Vbr=25.70..28.40V, Ipp=10.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
27C	-	SMBJP6KE27CA	TVS	Vrwm=23.10V, Vbr=25.70..28.40V, Ipp=16.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
27C	-	SMCJ1.5KE27CA	TVS	Vrwm=23.10V, Vbr=25.70..28.40V, Ipp=40.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
27C	-	TVP04A270CA-G	TVS	Vbr=25.65..28.35V, Vrwm=23.1V, Ipp=10.67A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
27C	-	TVP06B27ACA-G	TVS	Vrwm=23.1V, Vbr=25.65..28.35V, Ipp=16.0A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
27CA	-	P4SMA27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
27CA	-	P6SMB27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
27CA	-	P6SMBJ27CA	TVS	Vrwm=27V, Vbr=24.3..29.7V, 16A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
27CP	-	15TPSMC27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 40.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
27CP	-	4TPSMA27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 10.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1p	Lif
27CP	-	6TPSMB27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
27D	-	RKZ27DKU	Zener diode	26.29..27.64V, Izt=5mA, Zzt=70Ω, 500mW	TURP-FM	7d	1a	Ren
27G	-	ZD27G-CA2	Zener diode	27V±5%, Zzt=150Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
27G	-	ZD27G-CB2	Zener diode	27V±5%, Zzt=150Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
27L	-	ZD27L-CA2	Zener diode	27V±5%, Zzt=150Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
27L	-	ZD27L-CB2	Zener diode	27V±5%, Zzt=150Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
27P	-	BZD27C27P	Zener diode	25.65..28.35V, Zzt=15Ω, Izt=25mA, 800mW	SOD-123FL	7d	1a	Pjt
27P	-	MFPZ27	Zener diode	25.65..28.35V, Izt=25mA, Zzt=12Ω, 800mW	SOD-123FL	7d	1a	Ttr
27S	-	MMHZ5227SPT	Zener diode	3.528..3.762V, Izt=5mA, Zzt=90Ω, 225mW	SOD-123	5d	1a	Chm
27VB	-	BZT52B27	Zener diode	26.46..27.54V, Izt=2mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tsc
27VB	-	MMSZ27VBW	Zener diode	26.46..27.54V, Izt=2mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tac
27VZ	-	BZT52C27	Zener diode	25.65..28.35V, Izt=2mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tsc
27VZ	-	MMSZ27VCW	Zener diode	25.65..28.35V, Izt=2mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tac
27VZ	-	TCMMSZ27V	Zener diode	27V±5%, Izt=5mA, Zzt=75Ω, 500mW	SOD-123FL	7d	1a	Tac
27VZ	-	ZGFM0527C-MH	Zener diode	25.65..28.35V, Izt=5mA, Zzt=75Ω, 500mW	SOD-123	5d	1a	Pic
28	-	FM280-M	Si-diode	SBR, 80V, 2.0A, Vf<0.85V(2A)	SOD-123L	10d	1a	Tfr
28	-	HMSZ5228B	Zener diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 225mW	SOD-323	5d	1d	Hsn
28	-	MMPZ5255SPT	Zener diode	27.44..28.56V, Izt=5mA, Zzt=44Ω, 225mW	SOD-323	5d	1a	Chm
28	-	SMA3C28	Zener diode	28V±5%, Izt=27mA, Zzt<12Ω, 3W	DO-214AC	1d	1a	Exc
28	-	SMBG28	TVS	Vrwm=28V, Vbr=31.1..39.4V, 12.0A, 600W(1ms)	DO-215AA	5d	1a	Msc
28	-	ZD5228BS2	Zener diode	3.9V±5%, 20mA, Zzt=23Ω, 500mW	SOD-323	5d	1a	Cys
28A	-	1SMC28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, 33.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
28A	-	MMF28A	TVS	Vrwm=28V, Vbr=31.1..35.8V, Ipp=4.4A, 200W(1ms)	SOD-123FL	7d	2m	Sst
28A	-	SMAJ28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, 8.8A, 400W(1ms)	DO-214AC	1d	1a	Sus
28A	-	SMBG28A	TVS	Vrwm=28V, Vbr=31.1..35.8V, 13.2A, 600W(1ms)	DO-215AA	5d	1a	Msc
28A	-	SMBJ28A	TVS	Vrwm=28V, Vbr=31.1..35.8V, 13.2A, 600W(1ms)	DO-214AA	1d	1a	Sus
28A	-	SMCJ28A	TVS	Vrwm=28V, Vbr=31.1..35.8V, 30A, 1500W(1ms)	DO-214AB	1d	1k	Sus
28A	-	SMF28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, Ipp=4.4A, 200W(1ms)	SOD-123FL	7d	1a	Mco
28A	-	UMA28A	TVS	Vrwm=28V, Vbr=31.1..45.4V, 11.0A, 500W(1ms)	UltraMite	14d	1v	Msc
28B	-	1SMB3EZ28	Zener diode	28V±5%, Zzt=18Ω, Izt=27.0mA, 3W	DO-214AA	1d	1a	Pjt
28B	-	MMHZ5228BPT	Zener diode	3.705..4.095V, Izt=5mA, Zzt=90Ω, 225mW	SOD-123	5d	1a	Chm
28B	-	SMAJ5928B	Zener diode	13V±5%, Izt=28.8mA, Zzt=7.0Ω, 1.5W	DO-214AC	1d	1a	Mco
28B	-	Z3SMB28B	Zener diode	26.60..29.40V, Izt=27mA, Zzt=12Ω, 3W	DO-214AA	1d	1a	Ttr
28C	-	BZT52C28WS	Zener diode	26.60..29.40V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
28C	-	BZT52C28WT	Zener diode	26.60..29.40V, Izt=5mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Ttr
28C	-	BZX584C28	Zener diode	26.6..29.4V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523	7d	1a	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
28C	-	SMBG28C	TVS	Vrwm=28V, Vbr=31.1..39.4V, 12.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
28CA	-	1SMC28CA	TVS	Vbr=31.1..34.4V, Vrwm=28V, 33.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
28CA	-	MMF28CA	TVS	Vrwm=28V, Vbr=31.1..35.8V, Ipp=4.4A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
28CA	-	SMAJ28CA	TVS	Vrwm=28V, Vbr=31.1..34.4V, 8.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
28CA	-	SMBG28CA	TVS	Vrwm=28V, Vbr=31.1..35.8V, 13.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
28CA	-	SMBJ28CA	TVS	Vrwm=28V, Vbr=31.1..35.8V, 13.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
28CA	-	SMCJ28CA	TVS	Vrwm=28V, Vbr=31.1..35.8V, 30A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
28CA	-	SMF28CA	TVS	Vbr=31.1..34.4V, Vrwm=28V, Ipp=4.4A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
28CA	-	UMA28CA	TVS	Vrwm=28V, Vbr=31.1..45.4V, 11.0A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
28P	-	BZD27C28P	Zener diode	26.60..29.40V, Zzt=15Ω, Izt=25mA, 800mW	SOD-123FL	7d	1a	Pjt
28P	-	MFPZ28	Zener diode	26.6..29.4V, Izt=25mA, Zzt=12Ω, 800mW	SOD-123FL	7d	1a	Ttr
28S	-	MMHZ5228SPT	Zener diode	3.822..3.987V, Izt=5mA, Zzt=90Ω, 225mW	SOD-123	5d	1a	Chm
28V	-	SMA28	TVS	Vbr=31.1..38V, Vrwm=28.0V, 6A, 300W(1ms)	DO-214AC	1d	1a	Mic
28V	-	SMB28	TVS	Vbr=31.1..38V, Vrwm=28V, 12A, 600W(1ms)	DO-214AA	1d	1a	Mic
28V	-	SMC28	TVS	Vbr=31.1..38V, Vrwm=28V, 30A, 1500W(1ms)	DO-214AB	1d	1a	Mic
28VA	-	SMA28A	TVS	Vbr=31.1..34.4V, Vrwm=28.0V, 6.6A, 300W(1ms)	DO-214AC	1d	1a	Mic
28VA	-	SMB28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, 13.2A, 600W(1ms)	DO-214AA	1d	1a	Mic
28VA	-	SMC28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, 33A, 1500W(1ms)	DO-214AB	1d	1a	Mic
28VC	-	SMA28C	TVS	Vbr=31.1..38V, Vrwm=28.0V, 6A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
28VC	-	SMB28C	TVS	Vbr=31.1..38V, Vrwm=28V, 12A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
28VC	-	SMC28C	TVS	Vbr=31.1..38V, Vrwm=28V, 30A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
28VCA	-	SMA28CA	TVS	Vbr=31.1..34.4V, Vrwm=28.0V, 6.6A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
28VCA	-	SMB28CA	TVS	Vbr=31.1..34.4V, Vrwm=28V, 13.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
28VCA	-	SMC28CA	TVS	Vbr=31.1..34.4V, Vrwm=28V, 33A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
29	-	HMSZ5229B	Zener diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 225mW	SOD-323	5d	1d	Hsn
29	-	SS2PH9	Si-diode	SBR, 90V, 2A, Vf<0.8V(2A)	DO-220AA	8d	1k	Vs
29	-	ZD5229BS2	Zener diode	4.3V±5%, 20mA, Zzt=22Ω, 500mW	SOD-323	5d	1a	Cys
291	-	MA2P291	Si-diode	Rectifer, 250V, 300mA, Vf<1V(200mA), 5MHz	Mini Power	11d	1a	Pan
29B	-	1PMT5929B	Zener diode	15V±5%, Izt=100mA, 2.5W	DO-216AA	4d	1g	Ons
29B	-	MMHZ5229BPT	Zener diode	4.085..4.515V, Izt=5mA, Zzt=88Ω, 225mW	SOD-123	5d	1a	Chm
29B	-	SMAJ5929B	Zener diode	15V±5%, Izt=25.0mA, Zzt=9.0Ω, 1.5W	DO-214AC	1d	1a	Mco
29S	-	MMHZ5229SPT	Zener diode	4.214..4.386V, Izt=5mA, Zzt=88Ω, 225mW	SOD-123	5d	1a	Chm
2A	-	FSSL22	Si-diode	SBR, 20V, 2A, Vf<0.41V(3A)	DO-214AA	1d	2j	Fag
2A	-	HZU2ALL	Zener diode	1.6..2.0V, Izt=0.5mA, Zzt=350Ω, 150mW	URP	5d	1a	Ren
2A	-	MM3Z9V1	Zener diode	8.5..9.6V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323FL	7d	1a	Lge
2A	-	SD03C	TVS	Vrwm=3.0V, Vbr=3.2..6.3V, Ipp=25A, 500W(1ms), Bidir.	SOD-323	5ba	1a	Ldt
2A	-	STZ8091	Zener diode	8.5..9.6V, Izt=5mA, Zzt=20Ω, 300mW	SOD-323	5d	1a	Jiy
2A	-	TZD2.0WS	Zener diode	1.85..2.15V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Ttr
2A	-	TZD2.0WT	Zener diode	1.85..2.15V, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Ttr
2A•	-	TZD2.0YWS	Zener diode	1.95..2.15V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Ttr
2A•	-	TZD2.0YWT	Zener diode	1.95..2.15V, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Ttr
2A1	-	STZ8047C	Zener diode	4.74..4.99V, Izt=5mA, Zzt=80Ω, 300mW	SOD-323	5d	1a	Jiy
2A4	-	RKZ2.4AKU	Zener diode	2.33..2.52V, Izt=20mA, Zzt=100Ω, 500mW	TURP-FM	7d	1a	Ren
2A7	-	RKZ2.7AKU	Zener diode	2.54..2.75V, Izt=20mA, Zzt=110Ω, 500mW	TURP-FM	7d	1a	Ren
2B	-	CDZ55C2V2T	Zener diode	2.09..2.31V, Zzt=85Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
2B	-	FSSL23	Si-diode	SBR, 30V, 2A, Vf<0.41V(3A)	DO-214AA	1d	2j	Fag
2B	-	HZU2BLL	Zener diode	1.9..2.3V, Izt=0.5mA, Zzt=350Ω, 150mW	URP	5d	1a	Ren
2B	-	KDZ2.2EV	Zener diode	2.05..2.38V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
2B	-	KDZ2.2V	Zener diode	2.05..2.38V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
2B	-	MM3Z10	Zener diode	9.4..10.6V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323FL	7d	1a	Lge
2B	-	MM3Z10V	Zener diode	9.4..10.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323FL	7d	1a	Eic
2B	-	SA2B	Si-diode	Rectifier, 100V, 2A, Vf<1.1V(2A)	DO-214AC	1d	1k	Vs
2B	-	SD05C	TVS	Vrwm=5V, Vbr=6.2..7.3V, Ipp=24A, 500W(1ms), Bidir.	SOD-323	5ba	1a	Ldt
2B	-	STZ8100	Zener diode	9.4..10.6V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Jiy
2B	-	TZD2.2WS	Zener diode	2.05..2.38V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Ttr
2B	-	TZD2.2WT	Zener diode	2.05..2.38V, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Ttr
2B•	-	TZD2.2YWS	Zener diode	2.16..2.38V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Ttr
2B•	-	TZD2.2YWT	Zener diode	2.16..2.38V, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Ttr
2B4	-	RKZ2.4BKU	Zener diode	2.43..2.63V, Izt=20mA, Zzt=100Ω, 500mW	TURP-FM	7d	1a	Ren
2B7	-	RKZ2.7BKU	Zener diode	2.69..2.91V, Izt=20mA, Zzt=110Ω, 500mW	TURP-FM	7d	1a	Ren
2BL4	-	MBRS240	Si-diode	SBR, 40V, 2A, Vf=0.5V(4A)	403A-03	3d	1s	Ons
2C	-	FSSL24	Si-diode	SBR, 40V, 2A, Vf<0.41V(3A)	DO-214AA	1d	2j	Fag
2C	-	GBLC12C	TVS	Vrwm=12V, 11A, 350W(1ms), 3pF, Bidir.	SOD-323	5ba	1e	Prt
2C	-	HZU2CLL	Zener diode	2.2..2.6V, Izt=0.5mA, Zzt=350Ω, 150mW	URP	5d	1a	Ren
2C	-	KDZ2.4EV	Zener diode	2.28..2.6V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
2C	-	KDZ2.4V	Zener diode	2.28..2.6V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
2C	-	MM3Z11	Zener diode	10.4..11.6V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323FL	7d	1a	Lge
2C	-	MM3Z11V	Zener diode	10.4..11.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323FL	7d	1a	Eic
2C	-	STZ8110	Zener diode	10.4..11.6V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Jiy
2C	-	TZD2.4WS	Zener diode	2.28..2.60V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
2C	-	TZD2.4WT	Zener diode	2.28..2.60V, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Ttr
2C	-	USCD032	Si-diode	SBR, 20V, 0.3A, Vf<0.5V(0.3A)	0603	14d	1v	Zow
2C•	-	TZD2.4YWS	Zener diode	2.40..2.60V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Ttr
2C•	-	TZD2.4YWT	Zener diode	2.40..2.60V, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Ttr
2C1	-	STZ8051A	Zener diode	4.87..5.12V, Izt=5mA, Zzt=60Ω, 300mW	SOD-323	5d	1a	Jiy
2C10	-	SMA2EZ10D5	Zener diode	10V±5%, Izt=50mA, Zzt=3.5Ω, 2W	DO-214AC	1d	1a	Mco
2C11	-	SMA2EZ11D5	Zener diode	11V±5%, Izt=45.5mA, Zzt=4Ω, 2W	DO-214AC	1d	1a	Mco
2C12	-	SMA2EZ12D5	Zener diode	12V±5%, Izt=41.5mA, Zzt=4.5Ω, 2W	DO-214AC	1d	1a	Mco
2C13	-	SMA2EZ13D5	Zener diode	13V±5%, Izt=38.5mA, Zzt=5Ω, 2W	DO-214AC	1d	1a	Mco
2C14	-	SMA2EZ14D5	Zener diode	14V±5%, Izt=35.7mA, Zzt=5.5Ω, 2W	DO-214AC	1d	1a	Mco
2C15	-	SMA2EZ15D5	Zener diode	15V±5%, Izt=33.4mA, Zzt=7Ω, 2W	DO-214AC	1d	1a	Mco
2C16	-	SMA2EZ16D5	Zener diode	16V±5%, Izt=31.2mA, Zzt=8Ω, 2W	DO-214AC	1d	1a	Mco
2C17	-	SMA2EZ17D5	Zener diode	17V±5%, Izt=29.4mA, Zzt=9Ω, 2W	DO-214AC	1d	1a	Mco
2C18	-	SMA2EZ18D5	Zener diode	18V±5%, Izt=27.8mA, Zzt=10Ω, 2W	DO-214AC	1d	1a	Mco
2C19	-	SMA2EZ19D5	Zener diode	19V±5%, Izt=26.3mA, Zzt=11Ω, 2W	DO-214AC	1d	1a	Mco
2C20	-	SMA2EZ20D5	Zener diode	20V±5%, Izt=25mA, Zzt=11Ω, 2W	DO-214AC	1d	1a	Mco
2C22	-	SMA2EZ22D5	Zener diode	22V±5%, Izt=22.8mA, Zzt=12Ω, 2W	DO-214AC	1d	1a	Mco
2C24	-	SMA2EZ24D5	Zener diode	24V±5%, Izt=20.8mA, Zzt=13Ω, 2W	DO-214AC	1d	1a	Mco
2C27	-	SMA2EZ27D5	Zener diode	27V±5%, Izt=18.5mA, Zzt=18Ω, 2W	DO-214AC	1d	1a	Mco
2C30	-	SMA2EZ30D5	Zener diode	30V±5%, Izt=16.6mA, Zzt=20Ω, 2W	DO-214AC	1d	1a	Mco
2C33	-	SMA2EZ33D5	Zener diode	33V±5%, Izt=15.1mA, Zzt=23Ω, 2W	DO-214AC	1d	1a	Mco
2C36	-	SMA2EZ36D5	Zener diode	36V±5%, Izt=13.9mA, Zzt=25Ω, 2W	DO-214AC	1d	1a	Mco
2C39	-	SMA2EZ39D5	Zener diode	39V±5%, Izt=12.8mA, Zzt=30Ω, 2W	DO-214AC	1d	1a	Mco
2C43	-	SMA2EZ43D5	Zener diode	43V±5%, Izt=11.6mA, Zzt=35Ω, 2W	DO-214AC	1d	1a	Mco
2C47	-	SMA2EZ47D5	Zener diode	47V±5%, Izt=10.6mA, Zzt=40Ω, 2W	DO-214AC	1d	1a	Mco
2C51	-	SMA2EZ51D5	Zener diode	51V±5%, Izt=9.8mA, Zzt=48Ω, 2W	DO-214AC	1d	1a	Mco
2C56	-	SMA2EZ56D5	Zener diode	56V±5%, Izt=9mA, Zzt=55Ω, 2W	DO-214AC	1d	1a	Mco
2C5V1	-	SMA2EZ5.1D5	Zener diode	5.1V±5%, Izt=98.0mA, Zzt=3.5Ω, 2W	DO-214AC	1d	1a	Mco
2C5V6	-	SMA2EZ5.6D5	Zener diode	5.6V±5%, Izt=89.5mA, Zzt=2.5Ω, 2W	DO-214AC	1d	1a	Mco
2C62	-	SMA2EZ62D5	Zener diode	62V±5%, Izt=8.1mA, Zzt=60Ω, 2W	DO-214AC	1d	1a	Mco
2C68	-	SMA2EZ68D5	Zener diode	68V±5%, Izt=7.4mA, Zzt=75Ω, 2W	DO-214AC	1d	1a	Mco
2C6V2	-	SMA2EZ6.2D5	Zener diode	6.2V±5%, Izt=80.5mA, Zzt=1.5Ω, 2W	DO-214AC	1d	1a	Mco
2C6V8	-	SMA2EZ6.8D5	Zener diode	6.8V±5%, Izt=73.5mA, Zzt=2Ω, 2W	DO-214AC	1d	1a	Mco
2C75	-	SMA2EZ75D5	Zener diode	75V±5%, Izt=6.7mA, Zzt=90Ω, 2W	DO-214AC	1d	1a	Mco
2C7V5	-	SMA2EZ7.5D5	Zener diode	7.5V±5%, Izt=66.5mA, Zzt=2Ω, 2W	DO-214AC	1d	1a	Mco
2C8V2	-	SMA2EZ8.2D5	Zener diode	8.2V±5%, Izt=61mA, Zzt=2.3Ω, 2W	DO-214AC	1d	1a	Mco
2C9V1	-	SMA2EZ9.1D5	Zener diode	9.1V±5%, Izt=55mA, Zzt=2.5Ω, 2W	DO-214AC	1d	1a	Mco
2D	-	CDZ55C2V4T	Zener diode	2.28..2.52V, Zzt=85Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
2D	-	KDZ2.7EV	Zener diode	2.5..2.9V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
2D	-	KDZ2.7V	Zener diode	2.5..2.9V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
2D	-	MM3Z12	Zener diode	11.4..12.7V, Izt=5mA, Zzt=35Ω, 300mW	SOD-323FL	7d	1a	Lge
2D	-	MM3Z12V	Zener diode	11.4..12.7V, Izt=5mA, Zzt=25Ω, 200mW	SOD-323FL	7d	1a	Eic
2D	-	SA2D	Si-diode	Rectifier, 200V, 2A, Vf<1.1V(2A)	DO-214AC	1d	1k	Vs
2D	-	SD12C	TVS	Vrwm=12.0V, Vbr=13.3..19V, Ipp=15A, 500W(1ms), Bidir.	SOD-323	5ba	1a	Ldt
2D	-	STZ8120	Zener diode	11.4..12.7V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Jiy
2D	-	TZD2.7WS	Zener diode	2.50..2.90V, Izt=5mA, Zzt=110Ω, 200mW	SOD-323	5d	1a	Ttr
2D	-	TZD2.7WT	Zener diode	2.50..2.90V, Izt=5mA, Zzt=110Ω, 150mW	SOD-523	6d	1a	Ttr
2D	-	USCD022	Si-diode	SBR, 20V, 0.2A, Vf<0.45V(0.2A)	0603	14d	1v	Zow
2D•	-	TZD2.7YWS	Zener diode	2.65..2.90V, Izt=5mA, Zzt=110Ω, 200mW	SOD-323	5d	1a	Ttr
2D•	-	TZD2.7YWT	Zener diode	2.65..2.90V, Izt=5mA, Zzt=110Ω, 150mW	SOD-523	6d	1a	Ttr
2E	-	MM3Z13	Zener diode	12.4..14.1V, Izt=5mA, Zzt=35Ω, 300mW	SOD-323FL	7d	1a	Lge
2E	-	MM3Z13V	Zener diode	12.4..14.1V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Eic
2E	-	STZ8130	Zener diode	12.4..14.1V, Izt=5mA, Zzt=35Ω, 300mW	SOD-323	5d	1a	Jiy
2E1	-	STZ8051C	Zener diode	5.14..5.4V, Izt=5mA, Zzt=60Ω, 300mW	SOD-323	5d	1a	Jiy
2E10	-	SMA2EZ10D5	Zener diode	10V±5%, Izt=50mA, Zzt=3.5Ω, 2W	DO-214AC	1d	1a	Mco
2E11	-	SMA2EZ11D5	Zener diode	11V±5%, Izt=45.5mA, Zzt=4Ω, 2W	DO-214AC	1d	1a	Mco
2E12	-	SMA2EZ12D5	Zener diode	12V±5%, Izt=41.5mA, Zzt=4.5Ω, 2W	DO-214AC	1d	1a	Mco
2E13	-	SMA2EZ13D5	Zener diode	13V±5%, Izt=38.5mA, Zzt=5Ω, 2W	DO-214AC	1d	1a	Mco
2E14	-	SMA2EZ14D5	Zener diode	14V±5%, Izt=35.7mA, Zzt=5.5Ω, 2W	DO-214AC	1d	1a	Mco
2E15	-	SMA2EZ15D5	Zener diode	15V±5%, Izt=33.4mA, Zzt=7Ω, 2W	DO-214AC	1d	1a	Mco
2E16	-	SMA2EZ16D5	Zener diode	16V±5%, Izt=31.2mA, Zzt=8Ω, 2W	DO-214AC	1d	1a	Mco
2E17	-	SMA2EZ17D5	Zener diode	17V±5%, Izt=29.4mA, Zzt=9Ω, 2W	DO-214AC	1d	1a	Mco
2E18	-	SMA2EZ18D5	Zener diode	18V±5%, Izt=27.8mA, Zzt=10Ω, 2W	DO-214AC	1d	1a	Mco
2E19	-	SMA2EZ19D5	Zener diode	19V±5%, Izt=26.3mA, Zzt=11Ω, 2W	DO-214AC	1d	1a	Mco
2E20	-	SMA2EZ20D5	Zener diode	20V±5%, Izt=25mA, Zzt=11Ω, 2W	DO-214AC	1d	1a	Mco
2E22	-	SMA2EZ22D5	Zener diode	22V±5%, Izt=22.8mA, Zzt=12Ω, 2W	DO-214AC	1d	1a	Mco
2E24	-	SMA2EZ24D5	Zener diode	24V±5%, Izt=20.8mA, Zzt=13Ω, 2W	DO-214AC	1d	1a	Mco
2E27	-	SMA2EZ27D5	Zener diode	27V±5%, Izt=18.5mA, Zzt=18Ω, 2W	DO-214AC	1d	1a	Mco
2E30	-	SMA2EZ30D5	Zener diode	30V±5%, Izt=16.6mA, Zzt=20Ω, 2W	DO-214AC	1d	1a	Mco
2E33	-	SMA2EZ33D5	Zener diode	33V±5%, Izt=15.1mA, Zzt=23Ω, 2W	DO-214AC	1d	1a	Mco

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
2E36	-	SMA2EZ36D5	Zener diode	36V±5%, Izt=13.9mA, Zzt=25Ω, 2W	DO-214AC	1d	1a	Mco
2E39	-	SMA2EZ39D5	Zener diode	39V±5%, Izt=12.8mA, Zzt=30Ω, 2W	DO-214AC	1d	1a	Mco
2E43	-	SMA2EZ43D5	Zener diode	43V±5%, Izt=11.6mA, Zzt=35Ω, 2W	DO-214AC	1d	1a	Mco
2E47	-	SMA2EZ47D5	Zener diode	47V±5%, Izt=10.6mA, Zzt=40Ω, 2W	DO-214AC	1d	1a	Mco
2E5.1	-	SMA2EZ5.1D5	Zener diode	5.1V±5%, Izt=98.0mA, Zzt=3.5Ω, 2W	DO-214AC	1d	1a	Mco
2E5.6	-	SMA2EZ5.6D5	Zener diode	5.6V±5%, Izt=89.5mA, Zzt=2.5Ω, 2W	DO-214AC	1d	1a	Mco
2E51	-	SMA2EZ51D5	Zener diode	51V±5%, Izt=9.8mA, Zzt=48Ω, 2W	DO-214AC	1d	1a	Mco
2E56	-	SMA2EZ56D5	Zener diode	56V±5%, Izt=9mA, Zzt=55Ω, 2W	DO-214AC	1d	1a	Mco
2E6.2	-	SMA2EZ6.2D5	Zener diode	6.2V±5%, Izt=80.5mA, Zzt=1.5Ω, 2W	DO-214AC	1d	1a	Mco
2E6.8	-	SMA2EZ6.8D5	Zener diode	6.8V±5%, Izt=73.5mA, Zzt=2Ω, 2W	DO-214AC	1d	1a	Mco
2E62	-	SMA2EZ62D5	Zener diode	62V±5%, Izt=8.1mA, Zzt=60Ω, 2W	DO-214AC	1d	1a	Mco
2E68	-	SMA2EZ68D5	Zener diode	68V±5%, Izt=7.4mA, Zzt=75Ω, 2W	DO-214AC	1d	1a	Mco
2E7.5	-	SMA2EZ7.5D5	Zener diode	7.5V±5%, Izt=66.5mA, Zzt=2Ω, 2W	DO-214AC	1d	1a	Mco
2E75	-	SMA2EZ75D5	Zener diode	75V±5%, Izt=6.7mA, Zzt=90Ω, 2W	DO-214AC	1d	1a	Mco
2E8.2	-	SMA2EZ8.2D5	Zener diode	8.2V±5%, Izt=61mA, Zzt=2.3Ω, 2W	DO-214AC	1d	1a	Mco
2E9.1	-	SMA2EZ9.1D5	Zener diode	9.1V±5%, Izt=55mA, Zzt=2.5Ω, 2W	DO-214AC	1d	1a	Mco
2F	-	KDZ3.6FV	Zener diode	3.40..3.80V, Izt=5mA, Zzt=130Ω, 100mW	TFSC	7d	1a	Kec
2F	-	MAZD027	Zener diode	2.5..2.9V, Zzt=110Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
2F	-	MM3Z15	Zener diode	13.8..15.8V, Izt=5mA, Zzt=40Ω, 300mW	SOD-323FL	7d	1a	Lge
2F	-	MM3Z15V	Zener diode	14.3..15.8V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Eic
2F	-	STZ8150	Zener diode	13.9..15.6V, Izt=5mA, Zzt=40Ω, 300mW	SOD-323	5d	1a	Jiy
2F	-	U2FWJ44N	Si-diode	SBR, 30V, 2A, Vf<0.37V(2A), 130pF	3-4D1A	1d	1a	Tos
2F	-	USCD012	Si-diode	SBR, 20V, 0.1A, Vf<0.4V(0.1A)	0603	14d	1v	Zow
2FS4	-	D2FS4	Si-diode	SBR, 40V, 1.6A, Vf<0.55V(1.6A)	F2	1d	1a	Shi
2FS6	-	D2FS6	Si-diode	SBR, 60V, 1.5A, Vf<0.58V(1.5A)	F2	1d	1a	Shi
2G	-	CDZ55C2V7T	Zener diode	2.57..2.84V, Zzt=85Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
2G	-	SA2G	Si-diode	Rectifier, 400V, 2A, Vf<1.1V(2A)	DO-214AC	1d	1k	Vs
2G1	-	STZ8056A	Zener diode	5.3..5.58V, Izt=5mA, Zzt=40Ω, 300mW	SOD-323	5d	1a	Jiy
2H	-	MM3Z16	Zener diode	15.3..17.1V, Izt=5mA, Zzt=40Ω, 300mW	SOD-323FL	7d	1a	Lge
2H	-	MM3Z16V	Zener diode	15.3..17.1V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1a	Eic
2H	-	SD24C	TVS	Vrwm=24.0V, Vbr=26.7..40V, Ipp=8A, 500W(1ms), Bidir.	SOD-323	5ba	1a	Ldt
2H	-	STZ8160	Zener diode	15.3..17.1V, Izt=5mA, Zzt=50Ω, 300mW	SOD-323	5d	1a	Jiy
2J	-	MM3Z18	Zener diode	16.8..19.1V, Izt=5mA, Zzt=45Ω, 300mW	SOD-323FL	7d	1a	Lge
2J	-	MM3Z18V	Zener diode	16.8..19.1V, Izt=5mA, Zzt=45Ω, 200mW	SOD-323FL	7d	1a	Eic
2J	-	SA2J	Si-diode	Rectifier, 600V, 2A, Vf<1.1V(2A)	DO-214AC	1d	1k	Vs
2J	-	SD15C	TVS	Vrwm=15.0V, Vbr=16.7..24V, Ipp=15A, 500W(1ms), Bidir.	SOD-323	5ba	1a	Ldt
2J	-	STZ8180	Zener diode	16.9..19.1V, Izt=5mA, Zzt=60Ω, 300mW	SOD-323	5d	1a	Jiy
2J1	-	STZ8056C	Zener diode	5.66..5.95V, Izt=5mA, Zzt=40Ω, 300mW	SOD-323	5d	1a	Jiy
2K	-	DDZ22D	Zener diode	22V±10%, Izt=5mA, 500mW	SOD-123	5d	1d	Di
2K	-	DDZ22DS	Zener diode	22V±10%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
2K	-	FES1BWTG	Si-diode	U-fast Recovery, 100V, 1A, Vf<0.95V(1A)	SOD-123W	7d	1ua	Fag
2K	-	MM3Z20	Zener diode	18.8..21.2V, Izt=5mA, Zzt=50Ω, 300mW	SOD-323FL	7d	1a	Lge
2K	-	MM3Z20V	Zener diode	18.8..21.2V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323FL	7d	1a	Eic
2K	-	SA2K	Si-diode	Rectifier, 800V, 2A, Vf<1.1V(2A)	DO-214AC	1d	1k	Vs
2K	-	STZ8200	Zener diode	18.8..21.2V, Izt=5mA, Zzt=80Ω, 300mW	SOD-323	5d	1a	Jiy
2L	-	FES1DWTG	Si-diode	U-fast Recovery, 200V, 1A, Vf<0.95V(1A)	SOD-123W	7d	1ua	Fag
2L1	-	STZ8062A	Zener diode	5.85..6.15V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Jiy
2M	-	DDZ27D	Zener diode	27V±10%, Izt=5mA, 500mW	SOD-123	5d	1d	Di
2M	-	DDZ27DS	Zener diode	27V±10%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
2M	-	FES1GWTG	Si-diode	U-fast Recovery, 400V, 1A, Vf<1.3V(1A)	SOD-123W	7d	1ua	Fag
2M	-	MM3Z22	Zener diode	20.8..23.3V, Izt=5mA, Zzt=55Ω, 300mW	SOD-323FL	7d	1a	Lge
2M	-	MM3Z22V	Zener diode	20.8..23.3V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323FL	7d	1a	Eic
2M	-	SA2M	Si-diode	Rectifier, 1000V, 2A, Vf<1.1V(2A)	DO-214AC	1d	1k	Vs
2M	-	STZ8220	Zener diode	20.8..23.3V, Izt=5mA, Zzt=8Ω, 300mW	SOD-323	5d	1a	Jiy
2N	-	DDZ30D	Zener diode	30V±10%, Izt=5mA, 500mW	SOD-123	5d	1d	Di
2N	-	DDZ30DS	Zener diode	30V±10%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
2N	-	FES1JWTG	Si-diode	U-fast Recovery, 600V, 1A, Vf<1.7V(1A)	SOD-123W	7d	1ua	Fag
2N	-	MM3Z24	Zener diode	22.8..25.6V, Izt=5mA, Zzt=60Ω, 300mW	SOD-323FL	7d	1a	Lge
2N	-	MM3Z24V	Zener diode	22.8..25.6V, Izt=5mA, Zzt=70Ω, 200mW	SOD-323FL	7d	1a	Eic
2N	-	STZ8240	Zener diode	22.8..25.6V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323	5d	1a	Jiy
2N1	-	STZ8062C	Zener diode	6.24..6.56V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Jiy
2P	-	CMDZ20L	Zener diode	19.0..21.0V, Izt=0.5mA, Zzt=100Ω, 250mW	SOD-323	5d	1a	Cen
2P	-	KDZ3.6FVY	Zener diode	3.60..3.84 5V, Izt=5mA, Zzt=130Ω, 100mW	TFSC	7d	1a	Kec
2P	-	MM3Z27	Zener diode	25.1..28.9V, Izt=5mA, Zzt=70Ω, 300mW	SOD-323FL	7d	1a	Lge
2P	-	MM3Z27V	Zener diode	25.1..28.9V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Eic
2P	-	STZ8270	Zener diode	25.1..28.9V, Izt=2mA, Zzt=120Ω, 300mW	SOD-323	5d	1a	Jiy
2Q1	-	STZ8068A	Zener diode	6.44..6.77V, Izt=5mA, Zzt=20Ω, 300mW	SOD-323	5d	1a	Jiy
2R	-	MM3Z30	Zener diode	28..32V, Izt=5mA, Zzt=80Ω, 300mW	SOD-323FL	7d	1a	Lge
2R	-	MM3Z30V	Zener diode	28..32V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Eic
2R	-	STZ8300	Zener diode	28..32V, Izt=2mA, Zzt=160Ω, 300mW	SOD-323	5d	1a	Jiy



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
2S1	-	STZ8068C	Zener diode	6.85..7.2V, Izt=5mA, Zzt=20Ω, 300mW	SOD-323	5d	1a	Jiy
2U1	-	STZ8075A	Zener diode	7.07..7.43V, Izt=5mA, Zzt=20Ω, 300mW	SOD-323	5d	1a	Jiy
2V0	-	CZRSC55C2V0-G	Zener diode	1.90..2.10V, Zt=85Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
2V2	-	CDZ55C2V2	Zener diode	2.09..2.31V, Zzt=85Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
2V2	-	CDZ55C2V2S	Zener diode	2.09..2.31V, Zzt=85Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
2V2	-	CTZ55C2V2	Zener diode	2.09..2.31V, Izt=5mA, Zzt=85Ω, 500mW	1206	70d	2d	Ctc
2V2	-	CZRNC55C2V2-G	Zener diode	2.09..2.31V, Zt=85Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
2V2	-	CZRSC55C2V2-G	Zener diode	2.09..2.31V, Zt=85Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
2V4	-	BZY55-C2V4	Zener diode	2.28..2.52V, Izt=5mA, Zzt=85Ω, 500mW	0805	70d	2d	Tsc
2V4	-	CDZ55C2V4	Zener diode	2.28..2.52V, Zzt=85Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
2V4	-	CDZ55C2V4S	Zener diode	2.28..2.52V, Zzt=85Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
2V4	-	CTZ55C2V4	Zener diode	2.28..2.52V, Izt=5mA, Zzt=85Ω, 500mW	1206	70d	2d	Ctc
2V4	-	CZRNC55C2V4-G	Zener diode	2.28..2.52V, Zt=85Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
2V4	-	CZRSC55C2V4-G	Zener diode	2.28..50V, Zt=85Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
2V4B	-	BZT52B2V4	Zener diode	2.35..2.45V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123FL	7d	1a	Tsc
2V4B	-	MMSZ2V4BW	Zener diode	2.35..2.45V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123FL	7d	1a	Tac
2V4Z	-	BZT52C2V4	Zener diode	2.28..2.52V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123FL	7d	1a	Tsc
2V4Z	-	MMSZ2V4CW	Zener diode	2.28..2.52V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123FL	7d	1a	Tac
2V4Z	-	TCMMSZ2V4	Zener diode	2.4V±5%, Izt=5mA, Zzt=94Ω, 500mW	SOD-123FL	7d	1a	Tac
2V4Z	-	ZGFM052V4C-MH	Zener diode	2.28..2.52V, Izt=5mA, Zzt=94Ω, 500mW	SOD-123	5d	1a	Pic
2V7	-	BZY55-C2V7	Zener diode	2.57..2.84V, Izt=5mA, Zzt=85Ω, 500mW	0805	70d	2d	Tsc
2V7	-	CDZ55C2V7	Zener diode	2.57..2.84V, Zzt=85Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
2V7	-	CDZ55C2V7S	Zener diode	2.57..2.84V, Zzt=85Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
2V7	-	CTZ55C2V7	Zener diode	2.57..2.84V, Izt=5mA, Zzt=85Ω, 500mW	1206	70d	2d	Ctc
2V7	-	CZRNC55C2V7-G	Zener diode	2.57..2.84V, Zt=85Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
2V7	-	CZRSC55C2V7-G	Zener diode	2.57..2.84V, Zt=85Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
2V7B	-	BZT52B2V7	Zener diode	2.65..2.75V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123FL	7d	1a	Tsc
2V7B	-	MMSZ2V7BW	Zener diode	2.65..2.75V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123FL	7d	1a	Tac
2V7Z	-	BZT52C2V7	Zener diode	2.57..2.84V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123FL	7d	1a	Tsc
2V7Z	-	MMSZ2V7CW	Zener diode	2.57..2.84V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123FL	7d	1a	Tac
2V7Z	-	TCMMSZ2V7	Zener diode	2.7V±5%, Izt=5mA, Zzt=94Ω, 500mW	SOD-123FL	7d	1a	Tac
2V7Z	-	ZGFM052V7C-MH	Zener diode	2.57..2.84V, Izt=5mA, Zzt=94Ω, 500mW	SOD-123	5d	1a	Pic
2VK	-	P2SMA130A	TVS	Vbr=124..137V, Vrwm=111V, Ipp=1.11A, 200W(1ms)	DO-214AC	1d	1a	Vs
2VL	-	P2SMA140A	TVS	Vbr=133..147V, Vrwm=119V, Ipp=1.04A, 200W(1ms)	DO-214AC	1d	1a	Vs
2VM	-	P2SMA150A	TVS	Vbr=143..158V, Vrwm=128V, Ipp=0.97A, 200W(1ms)	DO-214AC	1d	1a	Vs
2VN	-	P2SMA170A	TVS	Vbr=162..179V, Vrwm=145V, Ipp=0.85A, 200W(1ms)	DO-214AC	1d	1a	Vs
2VP	-	P2SMA180A	TVS	Vbr=171..189V, Vrwm=154V, Ipp=0.81A, 200W(1ms)	DO-214AC	1d	1a	Vs
2VQ	-	P2SMA200A	TVS	Vbr=190..210V, Vrwm=171V, Ipp=0.73A, 200W(1ms)	DO-214AC	1d	1a	Vs
2VR	-	P2SMA220A	TVS	Vbr=209..231V, Vrwm=185V, Ipp=0.61A, 200W(1ms)	DO-214AC	1d	1a	Vs
2W	-	MM3Z62V	Zener diode	58..66V, Izt=2mA, Zzt=215Ω, 200mW	SOD-323	5d	1a	Sec
2W6	-	BZT52B4V3S	Zener diode	4.21..4.39V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Mco
2W7	-	BZT52B4V7S	Zener diode	4.61..4.79V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Mco
2W8	-	BZT52B5V1S	Zener diode	5.0..5.2V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	1a	Mco
2W9	-	BZT52B5V6S	Zener diode	5.49..5.71V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Mco
2WA	-	BZT52B6V2S	Zener diode	6.08..6.32V, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Mco
2WB	-	BZT52B6V8S	Zener diode	6.66..6.94V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Mco
2WC	-	BZT52B7V5S	Zener diode	7.35..7.65V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Mco
2WD	-	BZT52B8V2S	Zener diode	8.04..8.36V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Mco
2WE	-	BZT52B9V1S	Zener diode	8.92..9.28V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Mco
2WF	-	BZT52B10S	Zener diode	9.8..10.2V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Mco
2WG	-	BZT52B11S	Zener diode	10.78..11.22V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Mco
2WH	-	BZT52B12S	Zener diode	11.76..12.24V, Izt=5mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Mco
2WI	-	BZT52B13S	Zener diode	12.74..13.3V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Mco
2WJ	-	BZT52B15S	Zener diode	14.7..15.3V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Mco
2WK	-	BZT52B16S	Zener diode	15.68..16.3V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Mco
2WL	-	BZT52B18S	Zener diode	17.6..18.4V, Izt=5mA, Zzt=45Ω, 200mW	SOD-323	5d	1a	Mco
2WM	-	BZT52B20S	Zener diode	19.6..20.4V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Mco
2WN	-	BZT52B22S	Zener diode	21.56..22.44V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Mco
2WO	-	BZT52B24S	Zener diode	23.52..24.5V, Izt=5mA, Zzt=70Ω, 200mW	SOD-323	5d	1a	Mco
2WP	-	BZT52B27S	Zener diode	26.46..27.54V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Mco
2WQ	-	BZT52B30S	Zener diode	29.4..30.6V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Mco
2WR	-	BZT52B33S	Zener diode	32.34..33.7V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Mco
2WS	-	BZT52B36S	Zener diode	35.28..36.72V, Izt=2mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Mco
2WT	-	BZT52B39S	Zener diode	38.22..39.8V, Izt=2mA, Zzt=130Ω, 200mW	SOD-323	5d	1a	Mco
2X	-	MM3Z33	Zener diode	31..35V, Izt=5mA, Zzt=80Ω, 300mW	SOD-323FL	7d	1a	Lge
2X	-	MM3Z33V	Zener diode	31..35V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Eic
2X	-	STZ8330	Zener diode	31..35V, Izt=2mA, Zzt=200Ω, 300mW	SOD-323	5d	1a	Jiy
2X1	-	STZ8075C	Zener diode	7.51..7.89V, Izt=5mA, Zzt=20Ω, 300mW	SOD-323	5d	1a	Jiy
2Y	-	KDZ12VVY	Zener diode	11.74..12.24V, Izt=5mA, Zzt=15Ω, 100mW	VSC	7d	1a	Kec
2Y	-	MM3Z36	Zener diode	34..38V, Izt=5mA, Zzt=90Ω, 300mW	SOD-323FL	7d	1a	Lge

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
2Y	-	MM3Z36V	Zener diode	34..38V, Izt=2mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1a	Eic
2Y	-	STZ8360	Zener diode	34..38V, Izt=2mA, Zzt=250Ω, 300mW	SOD-323	5d	1a	Jiy
2Z	-	BZT52B3V0S	Zener diode	2.94..3.06V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323FL	7d	1a	Tsc
2Z	-	MM3Z39	Zener diode	37..41V, Izt=2.5mA, Zzt=100Ω, 300mW	SOD-323FL	7d	1a	Lge
2Z	-	MM3Z39V	Zener diode	37..41V, Izt=2mA, Zzt=130Ω, 200mW	SOD-323FL	7d	1a	Eic
2Z	-	MM3Z3V0B	Zener diode	2.94..3.06V, Zzt=89Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
2Z	-	MM3Z3V0BW	Zener diode	2.94..3.06V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323FL	7d	1a	Tac
2Z	-	STZ8390	Zener diode	37..41V, Izt=2mA, Zzt=300Ω, 300mW	SOD-323	5d	1a	Jiy
2Z	-	TCMM3Z3V0B	Zener diode	3.0V±2%, Izt=5mA, Zzt=89Ω, 200mW	SOD-323FL	7d	1a	Tac
2Z1	-	STZ8082A	Zener diode	7.77..8.17V, Izt=5mA, Zzt=20Ω, 300mW	SOD-323	5d	1a	Jiy
3	-	BAS16-02W	Si-diode	Sw, Fast, 80V, 250mA, 100mW, <6ns	SCD-80	6d	1a	Sie
3	-	CDZ55C3V0	Zener diode	2.85..3.15V, Zzt=85Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
3	-	CDZ55C3V0S	Zener diode	2.85..3.15V, Zzt=85Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
3	-	CDZ55C3V0T	Zener diode	2.85..3.15V, Zzt=85Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
3	-	CH521G-30PT	Si-diode	SBD, 30V, 200mA, Vf<0.5V(200mA)	SOD-723	8d	1a	Chm
3	-	CTZ55C3V0	Zener diode	2.85..3.15V, Izt=5mA, Zzt=85Ω, 500mW	1206	70d	2d	Ctc
3	-	CZRNC55C3V0-G	Zener diode	2.85..3.15V, Zt=85Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
3	-	GBLC03	TVS	Vrwm=3V, 20A, 350W(1ms), 3pF	SOD-323	5d	1a	Prt
3	-	MA2SV02	C-diode	VCO, 6V, 19..8pF(1..4V)	SOD-523	6d	1a	Pan
3	-	MAZS030	Zener diode	2.8..3.2V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
3	-	MM9D3V6	Zener diode	3.42..3.78V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1b	Wtr
3	-	MM9D4V7	Zener diode	4.47..4.94V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1a	Wtr
3	-	MMPZ5224SPT	Zener diode	2.774..2.856V, Izt=5mA, Zzt=100Ω, 225mW	SOD-323	5d	1a	Chm
3	-	MMSZ5245BPT	Zener diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 225mW	SOD-523	6d	1a	Chm
3	-	NZ9F15VST	Zener diode	14.34..14.98V, Izt=5mA, Zzt=42Ω, 200mW	SOD-923	7d	2m	Ons
3	-	NZ9F2V7ST	Zener diode	2.67..2.91V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1n	Ons
3	-	NZ9F3V6T	Zener diode	3.42..3.78V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1b	Ons
3	-	NZ9F4V7T	Zener diode	4.47..4.94V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1a	Ons
3	au	CDZ4.7B	Zener diode	4.7V±2.5%, Izt=40mA, 1W	VMN	7d	1s	Rhm
3	ba	BAT60A	Si-diode	SBD, Fast-Sw, 10V, 3A, Vf<0.3V(1A), 20pF	SOD-323	5d	2	Inf
3.	-	MMSZ5245SPT	Zener diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 225mW	SOD-523	6d	1a	Chm
3.0	-	MAZ80300H	Zener diode	2.95..3.1V, Zzt=120Ω(5mA), 150mW	SC-76	6d	1a	Pan
3.010	-	3.0SMCJ10	TVS	Vbr=11.1..14.1V, Vrwm=10V, 159.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0100	-	3.0SMCJ100	TVS	Vbr=111..141.0V, Vrwm=100V, 16.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0100A	-	3.0SMCJ100A	TVS	Vbr=111..128.0V, Vrwm=100V, 18.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0100C	-	3.0SMCJ100C	TVS	Vbr=111..141.0V, Vrwm=100V, 16.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.0100CA	-	3.0SMCJ100CA	TVS	Vbr=111..128.0V, Vrwm=100V, 18.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.010A	-	3.0SMCJ10A	TVS	Vbr=11.1..12.8V, Vrwm=10V, 176.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.010C	-	3.0SMCJ10C	TVS	Vbr=11.1..14.1V, Vrwm=10V, 159.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.010CA	-	3.0SMCJ10CA	TVS	Vbr=11.1..12.8V, Vrwm=10V, 176.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.011	-	3.0SMCJ11	TVS	Vbr=12.2..15.4V, Vrwm=11V, 149.2A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0110	-	3.0SMCJ110	TVS	Vbr=122..154.5V, Vrwm=110V, 15.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0110A	-	3.0SMCJ110A	TVS	Vbr=122..140.5V, Vrwm=110V, 16.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0110C	-	3.0SMCJ110C	TVS	Vbr=122..154.5V, Vrwm=110V, 15.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.0110CA	-	3.0SMCJ110CA	TVS	Vbr=122..140.5V, Vrwm=110V, 16.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.011A	-	3.0SMCJ11A	TVS	Vbr=12.2..14.0V, Vrwm=11V, 184.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.011C	-	3.0SMCJ11C	TVS	Vbr=12.2..15.4V, Vrwm=11V, 149.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.011CA	-	3.0SMCJ11CA	TVS	Vbr=12.2..14.0V, Vrwm=11V, 184.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.012	-	3.0SMCJ12	TVS	Vbr=13.3..16.9V, Vrwm=12V, 136.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0120	-	3.0SMCJ120	TVS	Vbr=133..169.0V, Vrwm=120V, 14.0A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0120A	-	3.0SMCJ120A	TVS	Vbr=133..153.0V, Vrwm=120V, 15.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0120C	-	3.0SMCJ120C	TVS	Vbr=133..169.0V, Vrwm=120V, 14.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.0120CA	-	3.0SMCJ120CA	TVS	Vbr=133..153.0V, Vrwm=120V, 15.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.012A	-	3.0SMCJ12A	TVS	Vbr=13.3..15.3V, Vrwm=12V, 150.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.012C	-	3.0SMCJ12C	TVS	Vbr=13.3..16.9V, Vrwm=12V, 136.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.012CA	-	3.0SMCJ12CA	TVS	Vbr=13.3..15.3V, Vrwm=12V, 150.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.013	-	3.0SMCJ13	TVS	Vbr=14.4..18.2V, Vrwm=13V, 126.0A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0130	-	3.0SMCJ130	TVS	Vbr=144..182.5V, Vrwm=130V, 13.0A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0130A	-	3.0SMCJ130A	TVS	Vbr=144..165.5V, Vrwm=130V, 14.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0130C	-	3.0SMCJ130C	TVS	Vbr=144..182.5V, Vrwm=130V, 13.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.0130CA	-	3.0SMCJ130CA	TVS	Vbr=144..165.5V, Vrwm=130V, 14.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.013A	-	3.0SMCJ13A	TVS	Vbr=14.4..16.5V, Vrwm=13V, 139.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.013C	-	3.0SMCJ13C	TVS	Vbr=14.4..18.2V, Vrwm=13V, 126.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.013CA	-	3.0SMCJ13CA	TVS	Vbr=14.4..16.5V, Vrwm=13V, 139.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.014	-	3.0SMCJ14	TVS	Vbr=15.6..19.8V, Vrwm=14V, 116.2A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.014A	-	3.0SMCJ14A	TVS	Vbr=15.6..17.9V, Vrwm=14V, 129.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.014C	-	3.0SMCJ14C	TVS	Vbr=15.6..19.8V, Vrwm=14V, 116.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.014CA	-	3.0SMCJ14CA	TVS	Vbr=15.6..17.9V, Vrwm=14V, 129.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.015	-	3.0SMCJ15	TVS	Vbr=16.7..21.1V, Vrwm=15V, 111.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0150	-	3.0SMCJ150	TVS	Vbr=167..211.5V, Vrwm=150V, 11.2A, 3000W(1ms)	DO-214AB	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
3.0150A	-	3.0SMCJ150A	TVS	Vbr=167..192.5V, Vrwm=150V, 12.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0150C	-	3.0SMCJ150C	TVS	Vbr=167..211.5V, Vrwm=150V, 11.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.0150CA	-	3.0SMCJ150CA	TVS	Vbr=167..192.5V, Vrwm=150V, 12.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.015A	-	3.0SMCJ15A	TVS	Vbr=16.7..19.2V, Vrwm=15V, 123.0A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.015C	-	3.0SMCJ15C	TVS	Vbr=16.7..21.1V, Vrwm=15V, 111.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.015CA	-	3.0SMCJ15CA	TVS	Vbr=16.7..19.2V, Vrwm=15V, 123.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.016	-	3.0SMCJ16	TVS	Vbr=17.8..22.6V, Vrwm=16V, 104.2A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0160	-	3.0SMCJ160	TVS	Vbr=178..226.0V, Vrwm=160V, 10.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0160A	-	3.0SMCJ160A	TVS	Vbr=178..205.0V, Vrwm=160V, 11.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0160C	-	3.0SMCJ160C	TVS	Vbr=178..226.0V, Vrwm=160V, 10.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.0160CA	-	3.0SMCJ160CA	TVS	Vbr=178..205.0V, Vrwm=160V, 11.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.016A	-	3.0SMCJ16A	TVS	Vbr=17.8..20.5V, Vrwm=16V, 115.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.016C	-	3.0SMCJ16C	TVS	Vbr=17.8..22.6V, Vrwm=16V, 104.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.016CA	-	3.0SMCJ16CA	TVS	Vbr=17.8..20.5V, Vrwm=16V, 115.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.017	-	3.0SMCJ17	TVS	Vbr=18.9..23.9V, Vrwm=17V, 98.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0170	-	3.0SMCJ170	TVS	Vbr=189..239.5V, Vrwm=170V, 9.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0170A	-	3.0SMCJ170A	TVS	Vbr=189..217.5V, Vrwm=170V, 11.0A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0170C	-	3.0SMCJ170C	TVS	Vbr=189..239.5V, Vrwm=170V, 9.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.0170CA	-	3.0SMCJ170CA	TVS	Vbr=189..217.5V, Vrwm=170V, 11.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.017A	-	3.0SMCJ17A	TVS	Vbr=18.9..21.7V, Vrwm=17V, 106.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.017C	-	3.0SMCJ17C	TVS	Vbr=18.9..23.9V, Vrwm=17V, 98.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.017CA	-	3.0SMCJ17CA	TVS	Vbr=18.9..21.7V, Vrwm=17V, 106.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.018	-	3.0SMCJ18	TVS	Vbr=20.0..25.3V, Vrwm=18V, 93.2A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0180	-	3.0SMCJ180	TVS	Vbr=198..253.8V, Vrwm=180V, 9.3A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0180A	-	3.0SMCJ180A	TVS	Vbr=198..230.4V, Vrwm=180V, 10.3A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0180C	-	3.0SMCJ180C	TVS	Vbr=198..253.8V, Vrwm=180V, 9.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.0180CA	-	3.0SMCJ180CA	TVS	Vbr=198..230.4V, Vrwm=180V, 10.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.018A	-	3.0SMCJ18A	TVS	Vbr=20.0..23.3V, Vrwm=18V, 102.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.018C	-	3.0SMCJ18C	TVS	Vbr=20.0..25.3V, Vrwm=18V, 93.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.018CA	-	3.0SMCJ18CA	TVS	Vbr=20.0..23.3V, Vrwm=18V, 102.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.0190	-	3.0SMCJ190	TVS	Vbr=209..267.9V, Vrwm=190V, 8.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0190A	-	3.0SMCJ190A	TVS	Vbr=209..243.2V, Vrwm=190V, 9.7A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0190C	-	3.0SMCJ190C	TVS	Vbr=209..267.9V, Vrwm=190V, 8.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.0190CA	-	3.0SMCJ190CA	TVS	Vbr=209..243.2V, Vrwm=190V, 9.7A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.020	-	3.0SMCJ20	TVS	Vbr=22.2..28.1V, Vrwm=20V, 83.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0200	-	3.0SMCJ200	TVS	Vbr=220..282.0V, Vrwm=200V, 8.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0200A	-	3.0SMCJ200A	TVS	Vbr=220..256.0V, Vrwm=200V, 9.3A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0200C	-	3.0SMCJ200C	TVS	Vbr=220..282.0V, Vrwm=200V, 8.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.0200CA	-	3.0SMCJ200CA	TVS	Vbr=220..256.0V, Vrwm=200V, 9.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.020A	-	3.0SMCJ20A	TVS	Vbr=22.2..25.5V, Vrwm=20V, 92.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.020C	-	3.0SMCJ20C	TVS	Vbr=22.2..28.1V, Vrwm=20V, 83.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.020CA	-	3.0SMCJ20CA	TVS	Vbr=22.2..25.5V, Vrwm=20V, 92.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.0210	-	3.0SMCJ210	TVS	Vbr=231..296.1V, Vrwm=210V, 7.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0210A	-	3.0SMCJ210A	TVS	Vbr=231..268.8V, Vrwm=210V, 8.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0210C	-	3.0SMCJ210C	TVS	Vbr=231..296.1V, Vrwm=210V, 7.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.0210CA	-	3.0SMCJ210CA	TVS	Vbr=231..268.8V, Vrwm=210V, 8.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.022	-	3.0SMCJ22	TVS	Vbr=24.4..30.9V, Vrwm=22V, 76.2A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0220	-	3.0SMCJ220	TVS	Vbr=242..310.2V, Vrwm=220V, 7.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0220A	-	3.0SMCJ220A	TVS	Vbr=242..281.6V, Vrwm=220V, 8.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.0220C	-	3.0SMCJ220C	TVS	Vbr=242..310.2V, Vrwm=220V, 7.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.0220CA	-	3.0SMCJ220CA	TVS	Vbr=242..281.6V, Vrwm=220V, 8.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.022A	-	3.0SMCJ22A	TVS	Vbr=24.4..28.0V, Vrwm=22V, 84.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.022C	-	3.0SMCJ22C	TVS	Vbr=24.4..30.9V, Vrwm=22V, 76.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.022CA	-	3.0SMCJ22CA	TVS	Vbr=24.4..28.0V, Vrwm=22V, 84.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.024	-	3.0SMCJ24	TVS	Vbr=26.7..33.8V, Vrwm=24V, 69.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.024A	-	3.0SMCJ24A	TVS	Vbr=26.7..30.7V, Vrwm=24V, 77.2A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.024C	-	3.0SMCJ24C	TVS	Vbr=26.7..33.8V, Vrwm=24V, 69.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.024CA	-	3.0SMCJ24CA	TVS	Vbr=26.7..30.7V, Vrwm=24V, 77.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.026	-	3.0SMCJ26	TVS	Vbr=28.9..36.6V, Vrwm=26V, 64.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.026A	-	3.0SMCJ26A	TVS	Vbr=28.9..33.2V, Vrwm=26V, 71.2A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.026C	-	3.0SMCJ26C	TVS	Vbr=28.9..36.6V, Vrwm=26V, 64.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.026CA	-	3.0SMCJ26CA	TVS	Vbr=28.9..33.2V, Vrwm=26V, 71.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.028	-	3.0SMCJ28	TVS	Vbr=31.1..39.4V, Vrwm=28V, 60.0A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.028A	-	3.0SMCJ28A	TVS	Vbr=31.1..35.8V, Vrwm=28V, 66.0A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.028C	-	3.0SMCJ28C	TVS	Vbr=31.1..39.4V, Vrwm=28V, 60.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.028CA	-	3.0SMCJ28CA	TVS	Vbr=31.1..35.8V, Vrwm=28V, 66.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.030	-	3.0SMCJ30	TVS	Vbr=33.3..42.2V, Vrwm=30V, 56.0A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.030A	-	3.0SMCJ30A	TVS	Vbr=33.3..38.3V, Vrwm=30V, 62.0A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.030C	-	3.0SMCJ30C	TVS	Vbr=33.3..42.2V, Vrwm=30V, 56.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.030CA	-	3.0SMCJ30CA	TVS	Vbr=33.3..38.3V, Vrwm=30V, 62.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
3.033	-	3.0SMCJ33	TVS	Vbr=36.7..46.5V, Vrwm=33V, 50.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.033A	-	3.0SMCJ33A	TVS	Vbr=36.7..42.2V, Vrwm=33V, 56.2A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.033C	-	3.0SMCJ33C	TVS	Vbr=36.7..46.5V, Vrwm=33V, 50.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.033CA	-	3.0SMCJ33CA	TVS	Vbr=36.7..42.2V, Vrwm=33V, 56.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.036	-	3.0SMCJ36	TVS	Vbr=40.0..50.7V, Vrwm=36V, 46.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.036A	-	3.0SMCJ36A	TVS	Vbr=40.0..46.0V, Vrwm=36V, 51.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.036C	-	3.0SMCJ36C	TVS	Vbr=40.0..50.7V, Vrwm=36V, 46.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.036CA	-	3.0SMCJ36CA	TVS	Vbr=40.0..46.0V, Vrwm=36V, 51.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.040	-	3.0SMCJ40	TVS	Vbr=44.4..56.3V, Vrwm=40V, 42.0A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.040A	-	3.0SMCJ40A	TVS	Vbr=44.4..51.1V, Vrwm=40V, 46.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.040C	-	3.0SMCJ40C	TVS	Vbr=44.4..56.3V, Vrwm=40V, 42.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.040CA	-	3.0SMCJ40CA	TVS	Vbr=44.4..51.1V, Vrwm=40V, 46.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.043	-	3.0SMCJ43	TVS	Vbr=47.8..60.5V, Vrwm=43V, 39.2A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.043A	-	3.0SMCJ43A	TVS	Vbr=47.8..54.9V, Vrwm=43V, 43.2A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.043C	-	3.0SMCJ43C	TVS	Vbr=47.8..60.5V, Vrwm=43V, 39.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.043CA	-	3.0SMCJ43CA	TVS	Vbr=47.8..54.9V, Vrwm=43V, 43.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.045	-	3.0SMCJ45	TVS	Vbr=50.0..63.3V, Vrwm=45V, 37.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.045A	-	3.0SMCJ45A	TVS	Vbr=50.0..57.5V, Vrwm=45V, 41.2A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.045C	-	3.0SMCJ45C	TVS	Vbr=50.0..63.3V, Vrwm=45V, 37.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.045CA	-	3.0SMCJ45CA	TVS	Vbr=50.0..57.5V, Vrwm=45V, 41.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.048	-	3.0SMCJ48	TVS	Vbr=53.3..67.5V, Vrwm=48V, 35.0A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.048A	-	3.0SMCJ48A	TVS	Vbr=53.3..61.3V, Vrwm=48V, 38.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.048C	-	3.0SMCJ48C	TVS	Vbr=53.3..67.5V, Vrwm=48V, 35.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.048CA	-	3.0SMCJ48CA	TVS	Vbr=53.3..61.3V, Vrwm=48V, 38.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.05.0	-	3.0SMCJ5.0	TVS	Vbr=6.4..7.55V, Vrwm=5.0V, 312.5A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.05.0A	-	3.0SMCJ5.0A	TVS	Vbr=6.4..7.25V, Vrwm=5.0V, 9.2 326A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.05.0C	-	3.0SMCJ5.0C	TVS	Vbr=6.4..7.55V, Vrwm=5.0V, 312.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.05.0CA	-	3.0SMCJ5.0CA	TVS	Vbr=6.4..7.25V, Vrwm=5.0V, 326A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.051	-	3.0SMCJ51	TVS	Vbr=56.7..71.8V, Vrwm=51V, 37.0A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.051A	-	3.0SMCJ51A	TVS	Vbr=56.7..65.2V, Vrwm=51V, 36.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.051C	-	3.0SMCJ51C	TVS	Vbr=56.7..71.8V, Vrwm=51V, 37.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.051CA	-	3.0SMCJ51CA	TVS	Vbr=56.7..65.2V, Vrwm=51V, 36.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.054	-	3.0SMCJ54	TVS	Vbr=60.0..76.0V, Vrwm=54V, 31.2A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.054A	-	3.0SMCJ54A	TVS	Vbr=60.0..69.0V, Vrwm=54V, 34.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.054C	-	3.0SMCJ54C	TVS	Vbr=60.0..76.0V, Vrwm=54V, 31.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.054CA	-	3.0SMCJ54CA	TVS	Vbr=60.0..69.0V, Vrwm=54V, 34.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.058	-	3.0SMCJ58	TVS	Vbr=64.4..81.6V, Vrwm=58V, 39.2A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.058A	-	3.0SMCJ58A	TVS	Vbr=64.4..74.1V, Vrwm=58V, 32.0A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.058C	-	3.0SMCJ58C	TVS	Vbr=64.4..81.6V, Vrwm=58V, 39.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.058CA	-	3.0SMCJ58CA	TVS	Vbr=64.4..74.1V, Vrwm=58V, 32.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.06.0	-	3.0SMCJ6.0	TVS	Vbr=6.67..8.45V, Vrwm=6.0V, 263.2A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.06.0A	-	3.0SMCJ6.0A	TVS	Vbr=6.67..7.67V, Vrwm=6.0V, 291.3A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.06.0C	-	3.0SMCJ6.0C	TVS	Vbr=6.67..8.45V, Vrwm=6.0V, 263.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.06.0CA	-	3.0SMCJ6.0CA	TVS	Vbr=6.67..7.67V, Vrwm=6.0V, 291.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.06.5	-	3.0SMCJ6.5	TVS	Vbr=7.22..9.14V, Vrwm=6.5V, 243.9A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.06.5A	-	3.0SMCJ6.5A	TVS	Vbr=7.22..8.30V, Vrwm=6.5V, 267.9A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.06.5C	-	3.0SMCJ6.5C	TVS	Vbr=7.22..9.14V, Vrwm=6.5V, 243.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.06.5CA	-	3.0SMCJ6.5CA	TVS	Vbr=7.22..8.30V, Vrwm=6.5V, 267.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.060	-	3.0SMCJ60	TVS	Vbr=66.7..84.5V, Vrwm=60V, 28.0A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.060A	-	3.0SMCJ60A	TVS	Vbr=66.7..76.7V, Vrwm=60V, 31.0A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.060C	-	3.0SMCJ60C	TVS	Vbr=66.7..84.5V, Vrwm=60V, 28.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.060CA	-	3.0SMCJ60CA	TVS	Vbr=66.7..76.7V, Vrwm=60V, 31.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.064	-	3.0SMCJ64	TVS	Vbr=71.1..90.1V, Vrwm=64V, 26.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.064A	-	3.0SMCJ64A	TVS	Vbr=71.1..81.8V, Vrwm=64V, 29.2A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.064C	-	3.0SMCJ64C	TVS	Vbr=71.1..90.1V, Vrwm=64V, 26.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.064CA	-	3.0SMCJ64CA	TVS	Vbr=71.1..81.8V, Vrwm=64V, 29.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.07.0	-	3.0SMCJ7.0	TVS	Vbr=7.78..9.86V, Vrwm=7.0V, 225.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.07.0A	-	3.0SMCJ7.0A	TVS	Vbr=7.78..8.95V, Vrwm=7.0V, 250A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.07.0C	-	3.0SMCJ7.0C	TVS	Vbr=7.78..9.86V, Vrwm=7.0V, 225.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.07.0CA	-	3.0SMCJ7.0CA	TVS	Vbr=7.78..8.95V, Vrwm=7.0V, 250A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.07.5	-	3.0SMCJ7.5	TVS	Vbr=8.33..10.67V, Vrwm=7.5V, 209.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.07.5A	-	3.0SMCJ7.5A	TVS	Vbr=8.33..9.58V, Vrwm=7.5V, 232.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.07.5C	-	3.0SMCJ7.5C	TVS	Vbr=8.33..10.67V, Vrwm=7.5V, 209.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.07.5CA	-	3.0SMCJ7.5CA	TVS	Vbr=8.33..9.58V, Vrwm=7.5V, 232.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.070	-	3.0SMCJ70	TVS	Vbr=77.8..98.6V, Vrwm=70V, 24.0A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.070A	-	3.0SMCJ70A	TVS	Vbr=77.8..89.5V, Vrwm=70V, 26.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.070C	-	3.0SMCJ70C	TVS	Vbr=77.8..98.6V, Vrwm=70V, 24.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.070CA	-	3.0SMCJ70CA	TVS	Vbr=77.8..89.5V, Vrwm=70V, 26.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.075	-	3.0SMCJ75	TVS	Vbr=83.3..105.7V, Vrwm=75V, 22.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.075A	-	3.0SMCJ75A	TVS	Vbr=83.3..95.8V, Vrwm=75V, 24.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
3.075C	-	3.0SMCJ75C	TVS	Vbr=83.3..105.7V, Vrwm=75V, 22.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.075CA	-	3.0SMCJ75CA	TVS	Vbr=83.3..95.8V, Vrwm=75V, 24.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.078	-	3.0SMCJ78	TVS	Vbr=86.7..109.8V, Vrwm=78V, 21.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.078A	-	3.0SMCJ78A	TVS	Vbr=86.7..99.7V, Vrwm=78V, 22.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.078C	-	3.0SMCJ78C	TVS	Vbr=86.7..109.8V, Vrwm=78V, 21.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.078CA	-	3.0SMCJ78CA	TVS	Vbr=86.7..99.7V, Vrwm=78V, 22.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.08.0	-	3.0SMCJ8.0	TVS	Vbr=8.89..11.30V, Vrwm=8.0V, 200A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.08.0A	-	3.0SMCJ8.0A	TVS	Vbr=8.89..10.23V, Vrwm=8.0V, 220.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.08.0C	-	3.0SMCJ8.0C	TVS	Vbr=8.89..11.30V, Vrwm=8.0V, 200A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.08.0CA	-	3.0SMCJ8.0CA	TVS	Vbr=8.89..10.23V, Vrwm=8.0V, 220.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.08.5	-	3.0SMCJ8.5	TVS	Vbr=9.44..11.92V, Vrwm=8.5V, 188.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.08.5A	-	3.0SMCJ8.5A	TVS	Vbr=9.44..10.82V, Vrwm=8.5V, 208.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.08.5C	-	3.0SMCJ8.5C	TVS	Vbr=9.44..11.92V, Vrwm=8.5V, 188.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.08.5CA	-	3.0SMCJ8.5CA	TVS	Vbr=9.44..10.82V, Vrwm=8.5V, 208.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.085	-	3.0SMCJ85	TVS	Vbr=94.4..119.2V, Vrwm=85V, 19.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.085A	-	3.0SMCJ85A	TVS	Vbr=94.4..108.2V, Vrwm=85V, 20.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.085C	-	3.0SMCJ85C	TVS	Vbr=94.4..119.2V, Vrwm=85V, 19.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.085CA	-	3.0SMCJ85CA	TVS	Vbr=94.4..108.2V, Vrwm=85V, 20.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.09.0	-	3.0SMCJ9.0	TVS	Vbr=10.0..12.6V, Vrwm=9.0V, 177.4A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.09.0A	-	3.0SMCJ9.0A	TVS	Vbr=10.0..11.5V, Vrwm=9.0V, 194.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.09.0C	-	3.0SMCJ9.0C	TVS	Vbr=10.0..12.6V, Vrwm=9.0V, 177.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.09.0CA	-	3.0SMCJ9.0CA	TVS	Vbr=10.0..11.5V, Vrwm=9.0V, 194.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.090	-	3.0SMCJ90	TVS	Vbr=100..126.5V, Vrwm=90V, 18.8A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.090A	-	3.0SMCJ90A	TVS	Vbr=100..115.5V, Vrwm=90V, 20.6A, 3000W(1ms)	DO-214AB	1d	1a	Eic
3.090C	-	3.0SMCJ90C	TVS	Vbr=100..126.5V, Vrwm=90V, 18.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.090CA	-	3.0SMCJ90CA	TVS	Vbr=100..115.5V, Vrwm=90V, 20.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
3.0B	-	HZF3.0BP	Zener diode	3V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
3.0C	-	HZF3.0CP	Zener diode	3V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
3.3	-	MAZ80330H	Zener diode	3.25..3.5V, Zzt=130Ω(5mA), 150mW	SC-76	6d	1a	Pan
3.3B	-	HZF3.3BP	Zener diode	3.3V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
3.3C	-	HZF3.3CP	Zener diode	3.3V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
3.3G	-	ZD3.3G-CA2	Zener diode	3.3V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
3.3G	-	ZD3.3G-CB2	Zener diode	3.3V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
3.3L	-	ZD3.3L-CA2	Zener diode	3.3V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
3.3L	-	ZD3.3L-CB2	Zener diode	3.3V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
3.6	-	MAZ80360H	Zener diode	3.55..3.8V, Zzt=130Ω(5mA), 150mW	SC-76	6d	1a	Pan
3.6B	-	HZF3.6BP	Zener diode	3.6V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
3.6B	-	PTZ3.6B	Zener diode	3.6V±10%, Izt=40mA, 1W	DO-214AC	1d	1a	Rhm
3.6C	-	HZF3.6CP	Zener diode	3.6V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
3.9	-	MAZ80390H	Zener diode	3.87..4.1V, Zzt=130Ω(5mA), 150mW	SC-76	6d	1a	Pan
3.9B	-	HZF3.9BP	Zener diode	3.9V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
3.9B	-	PTZ3.9B	Zener diode	3.9V±10%, Izt=40mA, 1W	DO-214AC	1d	1a	Rhm
3.9C	-	HZF3.9CP	Zener diode	3.9V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
3.9G	-	ZD3.9G-CA2	Zener diode	3.9V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
3.9G	-	ZD3.9G-CB2	Zener diode	3.9V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
3.9L	-	ZD3.9L-CA2	Zener diode	3.9V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
3.9L	-	ZD3.9L-CB2	Zener diode	3.9V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
3^	-	MAZS0300H	Zener diode	2.95..3.2V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
3^0	-	MAZ80300H	Zener diode	2.95..3.1V, Zzt=120Ω(5mA), 150mW	SC-76	6d	1a	Pan
3^0	-	MAZ8030GHL	Zener diode	2.95..3.1V, Zzt=120Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
3^3	-	MAZ80330H	Zener diode	3.25..3.5V, Zzt=130Ω(5mA), 150mW	SC-76	6d	1a	Pan
3^3	-	MAZ8033GHL	Zener diode	3.25..3.5V, Zzt=130Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
3^6	-	MAZ80360H	Zener diode	3.55..3.8V, Zzt=130Ω(5mA), 150mW	SC-76	6d	1a	Pan
3^6	-	MAZ8036GHL	Zener diode	3.55..3.8V, Zzt=130Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
3^9	-	MAZ80390H	Zener diode	3.87..4.1V, Zzt=130Ω(5mA), 150mW	SC-76	6d	1a	Pan
3^9	-	MAZ8039GHL	Zener diode	3.87..4.1V, Zzt=130Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
3_	-	MAZS0300L	Zener diode	2.8..3.05V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
3_0	-	MAZ80300L	Zener diode	2.8..3.05V, Zzt=120Ω(5mA), 150mW	SC-76	6d	1a	Pan
3_0	-	MAZ8030GLL	Zener diode	2.8..3.05V, Zzt=120Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
3_3	-	MAZ80330L	Zener diode	3.1..3.35V, Zzt=130Ω(5mA), 150mW	SC-76	6d	1a	Pan
3_3	-	MAZ8033GLL	Zener diode	3.1..3.35V, Zzt=130Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
3_6	-	MAZ80360L	Zener diode	3.4..3.65V, Zzt=130Ω(5mA), 150mW	SC-76	6d	1a	Pan
3_6	-	MAZ8036GLL	Zener diode	3.4..3.65V, Zzt=130Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
3_9	-	MAZ80390L	Zener diode	3.7..3.97V, Zzt=130Ω(5mA), 150mW	SC-76	6d	1a	Pan
3_9	-	MAZ8039GLL	Zener diode	3.7..3.97V, Zzt=130Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
3•0	-	RKZ3.0B2KG	Zener diode	2.95..3.20V, Izt=5mA, Zzt=120Ω, 200mW	URP	5d	2e	Ren
3•0	-	RKZ3.0B2KJ	Zener diode	2.95..3.20V, Izt=5mA, Zzt=120Ω, 150mW	UFP	7d	2e	Ren
3•0	an	HZU3.0B2	Zener diode	2.95..3.20V, Izt=5mA, Zzt=120Ω, 200mW	URP	5d	1a	Ren
3•0	ao	HZU3.0B1	Zener diode	2.80..3.05V, Izt=5mA, Zzt=120Ω, 200mW	URP	5d	1a	Ren
3•3	-	RKZ3.3B2KG	Zener diode	3.25..3.50V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	2e	Ren

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
3•3	-	RKZ3.3B2KJ	Zener diode	3.25..3.50V, Izt=5mA, Zzt=130Ω, 150mW	UFP	7d	2e	Ren
3•3	an	HZU3.3B2	Zener diode	3.25..3.50V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	1a	Ren
3•3	ao	HZU3.3B1	Zener diode	3.10..3.35V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	1a	Ren
3•6	-	RKZ3.6B2KG	Zener diode	3.55..3.80V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	2e	Ren
3•6	-	RKZ3.6B2KJ	Zener diode	3.55..3.80V, Izt=5mA, Zzt=130Ω, 150mW	UFP	7d	2e	Ren
3•6	an	HZU3.6B2	Zener diode	3.55..3.80V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	1a	Ren
3•6	ao	HZU3.6B1	Zener diode	3.40..3.65V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	1a	Ren
3•9	-	RKZ3.9B2KG	Zener diode	3.87..4.10V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	2e	Ren
3•9	-	RKZ3.9B2KJ	Zener diode	3.87..4.10V, Izt=5mA, Zzt=130Ω, 150mW	UFP	7d	2e	Ren
3•9	an	HZU3.9B2	Zener diode	3.87..4.10V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	1a	Ren
3•9	ao	HZU3.9B1	Zener diode	3.70..3.97V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	1a	Ren
30	-	BZY55-C30	Zener diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 500mW	0805	70d	2d	Tsc
30	-	CDZ55C30	Zener diode	28.50..31.50V, Zzt=80Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
30	-	CDZ55C30S	Zener diode	28.50..31.50V, Zzt=80Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
30	-	CDZ55C30T	Zener diode	28.50..31.50V, Zzt=80Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
30	-	CMZ30	Zener diode	30V±5%, Izt=10mA, 2W	M-FLAT	7d	1a	Tos
30	-	CTZ55C30	Zener diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 500mW	1206	70d	2d	Ctc
30	-	CZRNC55C30-G	Zener diode	28.50..31.50V, Zt=80Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
30	-	CZRSC55C30-G	Zener diode	28.50..31.50V, Zt=80Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
30	-	HMSZ5230B	Zener diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 225mW	SOD-323	5d	1d	Hsn
30	-	HZC3.0	Zener diode	3V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
30	-	KDZ3.0EV	Zener diode	2.8..3.2V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
30	-	KDZ3.0V	Zener diode	2.8..3.2V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
30	-	KDZ30VV	Zener diode	28.0..32.0V, Izt=2mA, Zzt=200Ω, 100mW	VSC	7d	1a	Kec
30	-	MAZ83000H	Zener diode	30.2..31.8, Zzt=160Ω(2mA), 150mW	SC-76	6d	1a	Pan
30	-	MAZS300	Zener diode	28..32V, Iz=2mA, 200mW	SOD-523	6d	1a	Pan
30	-	MAZY300	Zener diode	27..33V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
30	-	MMPZ5256SPT	Zener diode	29.40..30.60V, Izt=5mA, Zzt=78Ω, 225mW	SOD-323	5d	1a	Chm
30	-	P4SMA30	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 10.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
30	-	P6SMBJ30	TVS	Vrwm=30V, Vbr=27..33V, 14A, 600W(1ms)	DO-214AA	1d	1n	Lif
30	-	P6SMBJ33	TVS	Vrwm=33V, Vbr=29.7..36.3V, 12.6A, 600W(1ms)	DO-214AA	1d	1n	Lif
30	-	SMA3C30	Zener diode	30V±5%, Izt=25mA, Zzt<16Ω, 3W	DO-214AC	1d	1a	Exc
30	-	SMBG30	TVS	Vrwm=30V, Vbr=33.3..42.2V, 11.2A, 600W(1ms)	DO-215AA	5d	1a	Msc
30	-	SML4751	Zener diode	30V±5%, Izt=8.5mA, Zzt=40Ω, 1W	DO-214AC	1d	1k	Vs
30	-	TZD3.0WS	Zener diode	2.80..3.20V, Izt=5mA, Zzt=120Ω, 200mW	SOD-323	5d	1a	Ttr
30	-	TZD3.0WT	Zener diode	2.80..3.20V, Izt=5mA, Zzt=120Ω, 150mW	SOD-523	6d	1a	Ttr
30	-	TZD30WU	Zener diode	29.19..30.69V, Izt=2mA, Zzt=200Ω, 100mW	SOD-723	7d	1a	Ttr
30	-	U1ZB30	Zener diode	27..33V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos
30	-	USFZ30V	Zener diode	30V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
30	-	ZD5230BS2	Zener diode	4.7V±5%, 20mA, Zzt=19Ω, 500mW	SOD-323	5d	1a	Cys
30	ah	HZC30	Zener diode	30V±10%, Iz=2mA, 150mW	SOD-523	6d	1a	Ren
30	ay	CRZ30	Zener diode	27..33V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
30-	-	MAZ83000M	Zener diode	29.3..30.8V, Zzt=160Ω(2mA), 150mW	SC-76	6d	1a	Pan
30-	-	MAZ8300GML	Zener diode	29.3..30.8V, Zzt=160Ω(2mA), 150mW	SMini2-F3	6d	1a	Pan
30-	-	MAZS3000M	Zener diode	29.3..30.8V, Iz=2mA, 200mW	SOD-523	6d	1a	Pan
30^	-	MAZ83000H	Zener diode	30.2..31.8, Zzt=160Ω(2mA), 150mW	SC-76	6d	1a	Pan
30^	-	MAZ8300GHL	Zener diode	30.2..31.8, Zzt=160Ω(2mA), 150mW	SMini2-F3	6d	1a	Pan
30^	-	MAZS3000H	Zener diode	30.2..31.8V, Iz=2mA, 200mW	SOD-523	6d	1a	Pan
30_	-	MAZ83000L	Zener diode	28.3..19.7V, Zzt=160Ω(2mA), 150mW	SC-76	6d	1a	Pan
30_	-	MAZ8300GLL	Zener diode	28.3..19.7V, Zzt=160Ω(2mA), 150mW	SMini2-F3	6d	1a	Pan
30_	-	MAZS3000L	Zener diode	28.3..29.7V, Iz=2mA, 200mW	SOD-523	6d	1a	Pan
30•	-	RKZ30BKG	Zener diode	28.0..32.0V, Izt=2mA, Zzt=80Ω, 200mW	URP	5d	2e	Ren
30•	-	RKZ30BKJ	Zener diode	28.0..32.0V, Izt=2mA, Zzt=80Ω, 150mW	UFP	7d	2e	Ren
30•	-	TZD3.0YWS	Zener diode	2.95..3.20V, Izt=5mA, Zzt=120Ω, 200mW	SOD-323	5d	1a	Ttr
30•	-	TZD3.0YWT	Zener diode	2.95..3.20V, Izt=5mA, Zzt=120Ω, 150mW	SOD-523	6d	1a	Ttr
30•	aj	HZU30B	Zener diode	28.0..32.0V, Izt=2mA, Zzt=80Ω, 200mW	URP	5d	1a	Ren
300	-	MAZX300	Zener diode	270..330V, Zzt=5Ω(0.5mA), 1W	NMiniP2	1d	1a	Pan
300	-	P4SMA300	TVS	Vbr=270..330V, Vrwm=243V, 0.93A, 400W(1ms)	DO-214AC	1d	1a	Eic
300	-	U1ZB300	Zener diode	270..330V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
3006	-	1SMB3EZ6.8	Zener diode	6.8V±5%, Zzt=2Ω, Izt=110.0mA, 3W	DO-214AA	1d	1a	Pjt
3007	-	1SMB3EZ7.5	Zener diode	7.5V±5%, Zzt=2Ω, Izt=100.0mA, 3W	DO-214AA	1d	1a	Pjt
3008	-	1SMB3EZ8.2	Zener diode	8.2V±5%, Zzt=2Ω, Izt=91.0mA, 3W	DO-214AA	1d	1a	Pjt
3009	-	1SMB3EZ9.1	Zener diode	9.1V±5%, Zzt=3Ω, Izt=82.0mA, 3W	DO-214AA	1d	1a	Pjt
300A	-	1.5SMC300A	TVS	Vrwm=256.0V, Vbr=256..285V, Ipp=3.7A, 1500W(1ms)	DO-214AB	1d	2s	Lif
300A	-	1.5SMC300A	TVS	Vrwm=256.0V, Vbr=256..285V, Ipp=3.7A, 1500W(1ms)	DO-214AB	1d	1k	Vs
300A	-	1.5SMC300A	TVS	Vrwm=256.0V, Vbr=256..285V, Ipp=3.7A, 1500W(1ms)	DO-214AB	1d	1b	Mde
300A	-	P4SMA300A	TVS	Vbr=285..315V, Vrwm=256V, 0.97A, 400W(1ms)	DO-214AC	1d	1k	Vs
300A	-	P4SMA300A	TVS	Vbr=285..315V, Vrwm=256V, 0.97A, 400W(1ms)	DO-214AC	1d	1a	Eic
300A	-	P6SMB300A	TVS	Vbr=285..315V, Vrwm=256V, 1.45A, 600W(1ms)	DO-214AA	1d	1k	Vs
300A	-	SMAJP4KE300A	TVS	Vrwm=256.0V, Vbr=285.0..315.0V, Ipp=1.0A, 400W(1ms)	DO-214AC	1d	1a	Mco

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
300A	-	SMBJP6KE300A	TVS	Vrwm=256.0V, Vbr=285.0..315.0V, Ipp=1.5A, 600W(1ms)	DO-214AA	1d	1a	Mco
300A	-	SMCJ1.5KE300A	TVS	Vrwm=256.0V, Vbr=285.0..315.0V, Ipp=3.7A, 1500W(1ms)	DO-214AB	1d	1a	Mco
300A	-	TVP04A301A-G	TVS	Vbr=285.0..315.0V, Vrwm=256.0V, Ipp=0.97A, 400W(1ms)	DO-214AC	1d	2o	Cmc
300A	-	TVP06B301A-G	TVS	Vrwm=256.0V, Vbr=285.0..315.0V, Ipp=1.45A, 600W(1ms)	DO-214AA	1d	2o	Cmc
300C	-	1.5SMC300CA	TVS	Vrwm=256.0V, Vbr=285.0..315.0V, 3.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Fee
300C	-	1.5SMC300CA	TVS	Vrwm=256.0V, Vbr=285.0..315.0V, 3.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
300C	-	1.5SMC300CA	TVS	Vrwm=256.0V, Vbr=285.0..315.0V, 3.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
300C	-	P4SMA300C	TVS	Vbr=270..330V, Vrwm=243V, 0.93A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
300C	-	SMAJP4KE300CA	TVS	Vrwm=256.0V, Vbr=285.0..315.0V, Ipp=1.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
300C	-	SMBJP6KE300CA	TVS	Vrwm=256.0V, Vbr=285.0..315.0V, Ipp=1.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
300C	-	SMCJ1.5KE300CA	TVS	Vrwm=256.0V, Vbr=285.0..315.0V, Ipp=3.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
300C	-	TVP04A301CA-G	TVS	Vbr=285.0..315.0V, Vrwm=256.0V, Ipp=0.97A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
300C	-	TVP06B301ACA-G	TVS	Vrwm=256.0V, Vbr=285.0..315.0V, Ipp=1.45A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
300CA	-	P4SMA300CA	TVS	Vbr=285..315V, Vrwm=256V, 0.97A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
300CA	-	P6SMB300CA	TVS	Vbr=285..315V, Vrwm=256V, 1.45A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
300X	-	U1ZB300-X	Zener diode	280..300V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
300Y	-	U1ZB300-Y	Zener diode	290..310V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
300Z	-	U1ZB300-Z	Zener diode	300..320V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
301	-	HZU30-1L	Zener diode	28.2..29.6V, Izt=0.5mA, Zzt=200Ω, 150mW	URP	5d	1a	Ren
3010	-	1SMB3EZ10	Zener diode	10V±5%, Zzt=4Ω, Izt=75mA, 3W	DO-214AA	1d	1a	Pjt
3010	-	SZ3010	Zener diode	10V±10%, Izt=37.5mA, Zzt=4.5Ω, 1.5W	DO-214AC	1d	1a	Eic
3011	-	1SMB3EZ11	Zener diode	11V±5%, Zzt=4Ω, Izt=68.0mA, 3W	DO-214AA	1d	1a	Pjt
3011	-	SZ3011	Zener diode	11V±10%, Izt=34.1mA, Zzt=5.5Ω, 1.5W	DO-214AC	1d	1a	Eic
3012	-	1SMB3EZ12	Zener diode	12V±5%, Zzt=5Ω, Izt=63.0mA, 3W	DO-214AA	1d	1a	Pjt
3012	-	SZ3012	Zener diode	12V±10%, Izt=31.2mA, Zzt=6.5Ω, 1.5W	DO-214AC	1d	1a	Eic
3013	-	1SMB3EZ13	Zener diode	13V±5%, Zzt=5Ω, Izt=58.0mA, 3W	DO-214AA	1d	1a	Pjt
3013	-	SZ3013	Zener diode	13V±10%, Izt=28.8mA, Zzt=7.0Ω, 1.5W	DO-214AC	1d	1a	Eic
3014	-	1SMB3EZ14	Zener diode	14V±5%, Zzt=6Ω, Izt=53.0mA, 3W	DO-214AA	1d	1a	Pjt
3015	-	1SMB3EZ15	Zener diode	15V±5%, Zzt=7Ω, Izt=50.0mA, 3W	DO-214AA	1d	1a	Pjt
3015	-	SZ3015	Zener diode	15V±10%, Izt=25.0mA, Zzt=9.0Ω, 1.5W	DO-214AC	1d	1a	Eic
3016	-	1SMB3EZ16	Zener diode	16V±5%, Zzt=8Ω, Izt=47.0mA, 3W	DO-214AA	1d	1a	Pjt
3016	-	SZ3016	Zener diode	16V±10%, Izt=23.4mA, Zzt=10Ω, 1.5W	DO-214AC	1d	1a	Eic
3017	-	1SMB3EZ17	Zener diode	17V±5%, Zzt=9Ω, Izt=44.0mA, 3W	DO-214AA	1d	1a	Pjt
3018	-	1SMB3EZ18	Zener diode	18V±5%, Zzt=10Ω, Izt=42.0mA, 3W	DO-214AA	1d	1a	Pjt
3018	-	SZ3018	Zener diode	18V±10%, Izt=20.8mA, Zzt=12Ω, 1.5W	DO-214AC	1d	1a	Eic
3019	-	1SMB3EZ19	Zener diode	19V±5%, Zzt=11Ω, Izt=40.0mA, 3W	DO-214AA	1d	1a	Pjt
302	-	HZU30-2L	Zener diode	29.2..30.6V, Izt=0.5mA, Zzt=200Ω, 150mW	URP	5d	1a	Ren
3020	-	1SMB3EZ20	Zener diode	20V±5%, Zzt=11Ω, Izt=37.0mA, 3W	DO-214AA	1d	1a	Pjt
3020	-	SZ3020	Zener diode	20V±10%, Izt=18.7mA, Zzt=14Ω, 1.5W	DO-214AC	1d	1a	Eic
3022	-	1SMB3EZ22	Zener diode	22V±5%, Zzt=12Ω, Izt=34.0mA, 3W	DO-214AA	1d	1a	Pjt
3022	-	SZ3022	Zener diode	22V±10%, Izt=17.0mA, Zzt=17.5Ω, 1.5W	DO-214AC	1d	1a	Eic
3024	-	1SMB3EZ24	Zener diode	24V±5%, Zzt=13Ω, Izt=31.0mA, 3W	DO-214AA	1d	1a	Pjt
3024	-	SZ3024	Zener diode	24V±10%, Izt=15.6mA, Zzt=19Ω, 1.5W	DO-214AC	1d	1a	Eic
3025	-	1SMB3EZ25	Zener diode	25V±5%, Zzt=14Ω, Izt=30.0mA, 3W	DO-214AA	1d	1a	Pjt
3027	-	1SMB3EZ27	Zener diode	27V±5%, Zzt=18Ω, Izt=28.0mA, 3W	DO-214AA	1d	1a	Pjt
3027	-	SZ3027	Zener diode	27V±10%, Izt=13.9mA, Zzt=23Ω, 1.5W	DO-214AC	1d	1a	Eic
3028	-	1SMB3EZ28	Zener diode	28V±5%, Zzt=18Ω, Izt=27.0mA, 3W	DO-214AA	1d	1a	Pjt
303	-	HZU30-3L	Zener diode	30.2..31.6V, Izt=0.5mA, Zzt=200Ω, 150mW	URP	5d	1a	Ren
3030	-	1SMB3EZ30	Zener diode	30V±5%, Zzt=20Ω, Izt=25mA, 3W	DO-214AA	1d	1a	Pjt
3030	-	SZ3030	Zener diode	30V±10%, Izt=12.5mA, Zzt=26Ω, 1.5W	DO-214AC	1d	1a	Eic
3033	-	1SMB3EZ33	Zener diode	33V±5%, Zzt=23Ω, Izt=23.0mA, 3W	DO-214AA	1d	1a	Pjt
3033	-	SZ3033	Zener diode	33V±10%, Izt=11.4mA, Zzt=33Ω, 1.5W	DO-214AC	1d	1a	Eic
3036	-	1SMB3EZ36	Zener diode	36V±5%, Zzt=25Ω, Izt=21.0mA, 3W	DO-214AA	1d	1a	Pjt
3036	-	SZ3036	Zener diode	36V±10%, Izt=10.4mA, Zzt=38Ω, 1.5W	DO-214AC	1d	1a	Eic
3039	-	1SMB3EZ39	Zener diode	39V±5%, Zzt=30Ω, Izt=19.0mA, 3W	DO-214AA	1d	1a	Pjt
3039	-	SZ3039	Zener diode	39V±10%, Izt=9.6mA, Zzt=45Ω, 1.5W	DO-214AC	1d	1a	Eic
303D	-	SZ303D	Zener diode	3.3V±10%, Izt=113.6mA, Zzt=10Ω, 1.5W	DO-214AC	1d	1a	Eic
303G	-	SZ303G	Zener diode	3.6V±10%, Izt=104.2mA, Zzt=9.0Ω, 1.5W	DO-214AC	1d	1a	Eic
303J	-	SZ303J	Zener diode	3.9V±10%, Izt=96.1mA, Zzt=7.5Ω, 1.5W	DO-214AC	1d	1a	Eic
3043	-	1SMB3EZ43	Zener diode	43V±5%, Zzt=35Ω, Izt=17.0mA, 3W	DO-214AA	1d	1a	Pjt
3043	-	SZ3043	Zener diode	43V±10%, Izt=8.7mA, Zzt=53Ω, 1.5W	DO-214AC	1d	1a	Eic
3047	-	1SMB3EZ47	Zener diode	47V±5%, Zzt=40Ω, Izt=16.0mA, 3W	DO-214AA	1d	1a	Pjt
3047	-	SZ3047	Zener diode	47V±10%, Izt=8.0mA, Zzt=67Ω, 1.5W	DO-214AC	1d	1a	Eic
304D	-	SZ304D	Zener diode	4.3V±10%, Izt=87.2mA, Zzt=6.0Ω, 1.5W	DO-214AC	1d	1a	Eic
304H	-	SZ304H	Zener diode	4.7V±10%, Izt=79.8mA, Zzt=5.0Ω, 1.5W	DO-214AC	1d	1a	Eic
3051	-	1SMB3EZ51	Zener diode	51V±5%, Zzt=48Ω, Izt=15mA, 3W	DO-214AA	1d	1a	Pjt
3051	-	SZ3051	Zener diode	51V±10%, Izt=7.3mA, Zzt=70Ω, 1.5W	DO-214AC	1d	1a	Eic
3056	-	1SMB3EZ56	Zener diode	56V±5%, Zzt=55Ω, Izt=13.0mA, 3W	DO-214AA	1d	1a	Pjt
3056	-	SZ3056	Zener diode	56V±10%, Izt=6.7mA, Zzt=86Ω, 1.5W	DO-214AC	1d	1a	Eic
305B	-	SZ305B	Zener diode	5.1V±10%, Izt=73.5mA, Zzt=4.0Ω, 1.5W	DO-214AC	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
305G	-	SZ305G	Zener diode	5.6V±10%, Izt=66.9mA, Zzt=2.0Ω, 1.5W	DO-214AC	1d	1a	Eic
3060	-	1SMB3EZ60	Zener diode	60V±5%, Zzt=58Ω, Izt=12.5mA, 3W	DO-214AA	1d	1a	Pjt
3062	-	1SMB3EZ62	Zener diode	62V±5%, Zzt=60Ω, Izt=12.0mA, 3W	DO-214AA	1d	1a	Pjt
3062	-	SZ3062	Zener diode	62V±10%, Izt=6.0mA, Zzt=100Ω, 1.5W	DO-214AC	1d	1a	Eic
3068	-	1SMB3EZ68	Zener diode	68V±5%, Zzt=75Ω, Izt=11.0mA, 3W	DO-214AA	1d	1a	Pjt
3068	-	SZ3068	Zener diode	68V±10%, Izt=5.5mA, Zzt=120Ω, 1.5W	DO-214AC	1d	1a	Eic
306C	-	SZ306C	Zener diode	6.2V±10%, Izt=60.5mA, Zzt=2.0Ω, 1.5W	DO-214AC	1d	1a	Eic
306I	-	SZ306I	Zener diode	6.8V±10%, Izt=55.1mA, Zzt=2.5Ω, 1.5W	DO-214AC	1d	1a	Eic
3075	-	1SMB3EZ75	Zener diode	75V±5%, Zzt=90Ω, Izt=10.0mA, 3W	DO-214AA	1d	1a	Pjt
3075	-	SZ3075	Zener diode	75V±10%, Izt=5.0mA, Zzt=140Ω, 1.5W	DO-214AC	1d	1a	Eic
307F	-	SZ307F	Zener diode	7.5V±10%, Izt=50.0mA, Zzt=3.0Ω, 1.5W	DO-214AC	1d	1a	Eic
3082	-	1SMB3EZ82	Zener diode	82V±5%, Zzt=100Ω, Izt=9.1mA, 3W	DO-214AA	1d	1a	Pjt
3082	-	SZ3082	Zener diode	82V±10%, Izt=4.6mA, Zzt=160Ω, 1.5W	DO-214AC	1d	1a	Eic
3087	-	1SMB3EZ87	Zener diode	87V±5%, Zzt=120Ω, Izt=8.5mA, 3W	DO-214AA	1d	1a	Pjt
308C	-	SZ308C	Zener diode	8.2V±10%, Izt=45.7mA, Zzt=3.5Ω, 1.5W	DO-214AC	1d	1a	Eic
3091	-	1SMB3EZ91	Zener diode	91V±5%, Zzt=125Ω, Izt=8.2mA, 3W	DO-214AA	1d	1a	Pjt
3091	-	SZ3091	Zener diode	91V±10%, Izt=4.1mA, Zzt=200Ω, 1.5W	DO-214AC	1d	1a	Eic
309B	-	SZ309B	Zener diode	9.1V±10%, Izt=41.2mA, Zzt=4.0Ω, 1.5W	DO-214AC	1d	1a	Eic
30A	-	1.5SMC30A	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, Ipp=36A, 1500W(1ms)	DO-214AB	1d	2s	Lif
30A	-	1.5SMC30A	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, Ipp=36A, 1500W(1ms)	DO-214AB	1d	1k	Vs
30A	-	1.5SMC30A	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, Ipp=36A, 1500W(1ms)	403	3d	2t	Ons
30A	-	1.5SMC30A	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, Ipp=36A, 1500W(1ms)	DO-214AB	1d	1b	Mde
30A	-	1SMC30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, 31.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
30A	-	MMF30A	TVS	Vrwm=30V, Vbr=33.3..38.3V, Ipp=4.1A, 200W(1ms)	SOD-123FL	7d	2m	Sst
30A	-	P4SMA30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10.0A, 400W(1ms)	DO-214AC	1d	1k	Vs
30A	-	P4SMA30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
30A	-	P6SMB30A	TVS	Vrwm=30V, Vbr=28.5..31.5V, 14.5A, 600W(1ms)	403A	3d	1s	Ons
30A	-	P6SMB30A	TVS	Vrwm=30V, Vbr=28.5..31.5V, 14.5A, 600W(1ms)	DO-214AA	1d	1k	Vs
30A	-	P6SMBJ30A	TVS	Vrwm=30V, Vbr=27..33V, 14.4A, 600W(1ms)	DO-214AA	1d	1n	Lif
30A	-	RKZ30AKU	Zener diode	26.99..28.39V, Izt=5mA, Zzt=80Ω, 500mW	TURP-FM	7d	1a	Ren
30A	-	SMAJ30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, 8.3A, 400W(1ms)	DO-214AC	1d	1a	Sus
30A	-	SMAJP4KE30A	TVS	Vrwm=25.60V, Vbr=28.50..31.50V, Ipp=9.9A, 400W(1ms)	DO-214AC	1d	1a	Mco
30A	-	SMBG30A	TVS	Vrwm=30V, Vbr=33.1..38.3V, 12.4A, 600W(1ms)	DO-215AA	5d	1a	Msc
30A	-	SMBJ30A	TVS	Vrwm=30V, Vbr=33.1..38.3V, 12.4A, 600W(1ms)	DO-214AA	1d	1a	Sus
30A	-	SMBJP6KE30A	TVS	Vrwm=25.60V, Vbr=28.50..31.50V, Ipp=14.7A, 600W(1ms)	DO-214AA	1d	1a	Mco
30A	-	SMCJ1.5KE30A	TVS	Vrwm=25.60V, Vbr=28.50..31.50V, Ipp=36.7A, 1500W(1ms)	DO-214AB	1d	1a	Mco
30A	-	SMCJ30A	TVS	Vrwm=30V, Vbr=33.3..38.3V, 28A, 1500W(1ms)	DO-214AB	1d	1k	Sus
30A	-	SMF30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, Ipp=4.1A, 200W(1ms)	SOD-123FL	7d	1a	Mco
30A	-	SZP6SMB30A	TVS	Vrwm=30V, Vbr=28.5..31.5V, 14.5A, 600W(1ms)	403A	3d	1s	Ons
30A	-	TVP04A300A-G	TVS	Vbr=28.50..31.50V, Vrwm=25.6V, Ipp=9.66A, 400W(1ms)	DO-214AC	1d	2o	Cmc
30A	-	TVP06B30A-G	TVS	Vrwm=25.6V, Vbr=28.50..31.50V, Ipp=14.49A, 600W(1ms)	DO-214AA	1d	2o	Cmc
30A	-	UMA30A	TVS	Vrwm=30V, Vbr=33.3..48.4V, 10.3A, 500W(1ms)	UltraMite	14d	1v	Msc
30A8	-	1SMB3EZ8.7	Zener diode	8.7V±5%, Zzt=2Ω, Izt=85mA, 3W	DO-214AA	1d	1a	Pjt
30AP	-	15TPSMC30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 36.7A, 1500W(1ms)	DO-214AB	1d	1p	Lif
30AP	-	4TPSMA30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 9.9A, 400W(1ms)	DO-214AC	1d	1p	Lif
30AP	-	6TPSMB30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 14.7A, 600W(1ms)	DO-214AA	1d	1p	Lif
30B	-	1PMT5930B	Zener diode	16V±5%, Izt=93mA, 2.5W	DO-216AA	4d	1g	Ons
30B	-	1SMB3EZ30	Zener diode	30V±5%, Zzt=20Ω, Izt=25mA, 3W	DO-214AA	1d	1a	Pjt
30B	-	HZF30BP	Zener diode	30V±5%, Iz=10mA, 900mW	LRP	1d	2f	Ren
30B	-	MMHZ5230BPT	Zener diode	4.465..4.935V, Izt=5mA, Zzt=70Ω, 225mW	SOD-123	5d	1a	Chm
30B	-	PTZ30B	Zener diode	30V±10%, Izt=10mA, 1W	DO-214AC	1d	1a	Rhm
30B	-	RKZ30BKU	Zener diode	27.70..29.13V, Izt=5mA, Zzt=80Ω, 500mW	TURP-FM	7d	1a	Ren
30B	-	SMAJ5930B	Zener diode	16V±5%, Izt=23.4mA, Zzt=10.0Ω, 1.5W	DO-214AC	1d	1a	Mco
30B	-	Z3SMB30B	Zener diode	28.50..31.50V, Izt=25mA, Zzt=16Ω, 3W	DO-214AA	1d	1a	Ttr
30B0	-	SZ30B0	Zener diode	100V±10%, Izt=3.7mA, Zzt=250Ω, 1.5W	DO-214AC	1d	1a	Eic
30B1	-	SZ30B1	Zener diode	110V±10%, Izt=3.4mA, Zzt=300Ω, 1.5W	DO-214AC	1d	1a	Eic
30B2	-	SZ30B2	Zener diode	120V±10%, Izt=3.1mA, Zzt=380Ω, 1.5W	DO-214AC	1d	1a	Eic
30B3	-	SZ30B3	Zener diode	130V±10%, Izt=2.9mA, Zzt=450Ω, 1.5W	DO-214AC	1d	1a	Eic
30B5	-	SZ30B5	Zener diode	150V±10%, Izt=2.5mA, Zzt=600Ω, 1.5W	DO-214AC	1d	1a	Eic
30B6	-	SZ30B6	Zener diode	160V±10%, Izt=2.3mA, Zzt=700Ω, 1.5W	DO-214AC	1d	1a	Eic
30B8	-	SZ30B8	Zener diode	180V±10%, Izt=2.1mA, Zzt=900Ω, 1.5W	DO-214AC	1d	1a	Eic
30C	-	1.5SMC30CA	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, Ipp=36A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
30C	-	1.5SMC30CA	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, Ipp=36A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
30C	-	1.5SMC30CA	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, Ipp=36A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
30C	-	HZF30CP	Zener diode	30V±10%, Iz=10mA, 900mW	LRP	1d	2f	Ren
30C	-	P4SMA30C	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 10.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
30C	-	P4SMA30CA	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
30C	-	P6SMB30CA	TVS	Vrwm=30V, Vbr=28.5..31.5V, 14.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
30C	-	P6SMBJ30C	TVS	Vrwm=30V, Vbr=27..33V, 14A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
30C	-	RKZ30CKU	Zener diode	28.36..29.82V, Izt=5mA, Zzt=80Ω, 500mW	TURP-FM	7d	1a	Ren

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
30C	-	SMAJP4KE30CA	TVS	Vrwm=25.60V, Vbr=28.50..31.50V, Ipp=9.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
30C	-	SMBG30C	TVS	Vrwm=30V, Vbr=33.3..42.2V, 11.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
30C	-	SMBJP6KE30CA	TVS	Vrwm=25.60V, Vbr=28.50..31.50V, Ipp=14.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
30C	-	SMCJ1.5KE30CA	TVS	Vrwm=25.60V, Vbr=28.50..31.50V, Ipp=36.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
30C	-	TVP04A300CA-G	TVS	Vbr=28.50..31.50V, Vrwm=25.6V, Ipp=9.66A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
30C	-	TVP06B30ACA-G	TVS	Vrwm=25.6V, Vbr=28.50..31.50V, Ipp=14.49A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
30CA	-	1SMC30CA	TVS	Vbr=33.3..36.8V, Vrwm=30V, 31.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
30CA	-	MMF30CA	TVS	Vrwm=30V, Vbr=33.3..38.3V, Ipp=4.1A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
30CA	-	P4SMA30CA	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
30CA	-	P6SMB30CA	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 14.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
30CA	-	P6SMBJ30CA	TVS	Vrwm=30V, Vbr=27..33V, 14.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
30CA	-	SMAJ30CA	TVS	Vrwm=30V, Vbr=33.3..36.8V, 8.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
30CA	-	SMBG30CA	TVS	Vrwm=30V, Vbr=33.1..38.3V, 12.4A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
30CA	-	SMBJ30CA	TVS	Vrwm=30V, Vbr=33.1..38.3V, 12.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
30CA	-	SMCJ30CA	TVS	Vrwm=30V, Vbr=33.3..38.3V, 28A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
30CA	-	SMF30CA	TVS	Vbr=33.3..36.8V, Vrwm=30V, Ipp=4.1A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
30CA	-	UMA30CA	TVS	Vrwm=30V, Vbr=33.3..48.4V, 10.3A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
30CP	-	15TPSMC30CA	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 36.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
30CP	-	4TPSMA30CA	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 9.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1p	Lif
30CP	-	6TPSMB30CA	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 14.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
30D	-	RKZ30DKU	Zener diode	29.02..30.51V, Izt=5mA, Zzt=80Ω, 500mW	TURP-FM	7d	1a	Ren
30D0	-	SZ30D0	Zener diode	200V±10%, Izt=1.9mA, Zzt=1200Ω, 1.5W	DO-214AC	1d	1a	Eic
30G	-	ZD30G-CA2	Zener diode	30V±5%, Zzt=200Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
30G	-	ZD30G-CB2	Zener diode	30V±5%, Zzt=200Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
30L	-	ZD30L-CA2	Zener diode	30V±5%, Zzt=200Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
30L	-	ZD30L-CB2	Zener diode	30V±5%, Zzt=200Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
30P	-	BZD27C30P	Zener diode	28.50..31.50V, Zzt=15Ω, Izt=25mA, 800mW	SOD-123FL	7d	1a	Pjt
30P	-	MFPZ30	Zener diode	28.5..31.5V, Izt=25mA, Zzt=12Ω, 800mW	SOD-123FL	7d	1a	Ttr
30S	-	MMHZ5230SPT	Zener diode	4.606..4.794V, Izt=5mA, Zzt=70Ω, 225mW	SOD-123	5d	1a	Chm
30V	-	SMA30	TVS	Vbr=33.3..40.7V, Vrwm=30.0V, 5.6A, 300W(1ms)	DO-214AC	1d	1a	Mic
30V	-	SMB30	TVS	Vbr=33.3..40.7V, Vrwm=30V, 11.2A, 600W(1ms)	DO-214AA	1d	1a	Mic
30V	-	SMC30	TVS	Vbr=33.3..40.7V, Vrwm=30V, 28A, 1500W(1ms)	DO-214AB	1d	1a	Mic
30VA	-	SMA30A	TVS	Vbr=33.3..36.8V, Vrwm=30.0V, 6.2A, 300W(1ms)	DO-214AC	1d	1a	Mic
30VA	-	SMB30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, 12.4A, 600W(1ms)	DO-214AA	1d	1a	Mic
30VA	-	SMC30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, 31A, 1500W(1ms)	DO-214AB	1d	1a	Mic
30VB	-	BZT52B30	Zener diode	29.40..30.60V, Izt=2mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tsc
30VB	-	MMSZ30VBW	Zener diode	29.40..30.60V, Izt=2mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tac
30VC	-	SMA30C	TVS	Vbr=33.3..40.7V, Vrwm=30.0V, 5.6A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
30VC	-	SMB30C	TVS	Vbr=33.3..40.7V, Vrwm=30V, 11.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
30VC	-	SMC30C	TVS	Vbr=33.3..40.7V, Vrwm=30V, 28A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
30VCA	-	SMA30CA	TVS	Vbr=33.3..36.8V, Vrwm=30.0V, 6.2A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
30VCA	-	SMB30CA	TVS	Vbr=33.3..36.8V, Vrwm=30V, 12.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
30VCA	-	SMC30CA	TVS	Vbr=33.3..36.8V, Vrwm=30V, 31A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
30VZ	-	BZT52C30	Zener diode	28.50..31.50V, Izt=2mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tsc
30VZ	-	MMSZ30VCW	Zener diode	28.50..31.50V, Izt=2mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tac
30VZ	-	TCMMSZ30V	Zener diode	30V±5%, Izt=5mA, Zzt=75Ω, 500mW	SOD-123FL	7d	1a	Tac
30VZ	-	ZGFM0530C-MH	Zener diode	28.50..31.5V, Izt=5mA, Zzt=75Ω, 500mW	SOD-123	5d	1a	Pic
31	-	HMSZ5231B	Zener diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 225mW	SOD-323	5d	1d	Hsn
31	-	ZD5231BS2	Zener diode	5.1V±5%, 20mA, Zzt=17Ω, 500mW	SOD-323	5d	1a	Cys
3100	-	1SMB3EZ100	Zener diode	100V±5%, Zzt=175Ω, Izt=7.5mA, 3W	DO-214AA	1d	1a	Pjt
31A	-	P3100SAA	Thy-SPD	Vdrm=275V, Vs=350V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Vs
31B	-	1PMT5931B	Zener diode	18V±5%, Izt=83mA, 2.5W	DO-216AA	4d	1g	Ons
31B	-	MMHZ5231BPT	Zener diode	4.845..5.355V, Izt=5mA, Zzt=50Ω, 225mW	SOD-123	5d	1a	Chm
31B	-	SMAJ5931B	Zener diode	18V±5%, Izt=20.8mA, Zzt=12.0Ω, 1.5W	DO-214AC	1d	1a	Mco
31S	-	MMHZ5231SPT	Zener diode	4.998..5.202V, Izt=5mA, Zzt=50Ω, 225mW	SOD-123	5d	1a	Chm
32	-	CMZ33	Zener diode	33V±5%, Izt=10mA, 2W	M-FLAT	7d	1a	Tos
32	-	FDZ2.7VT	Zener diode	2.690..2.910V, Izt=5mA, Zzt=110Ω, 200mW	SOD-323	5d	1a	Fis
32	-	GDZ2V7B-V	Zener diode	2.69..2.91V, Izt=5mA, Zzt=110Ω, 200mW	SOD-323	5d	2m	Vs
32	-	HMSZ5232B	Zener diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 225mW	SOD-323	5d	1d	Hsn
32	-	LBZT52B2V7T1G	Zener diode	2.69..2.91V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
32	-	LEDZ2.7BT1G	Zener diode	2.69..2.91V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
32	-	LUDZS2.7BT1G	Zener diode	2.69..2.91V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
32	-	UDZS2.7B	Zener diode	2.69..2.91V, Izt=5mA, Zzt=110Ω, 200mW	SOD-323	5d	1a	Wtr
32	-	ZD5232BS2	Zener diode	5.6V±5%, 20mA, Zzt=11Ω, 500mW	SOD-323	5d	1a	Cys
320A	-	TSP320SA	Thy-SPD	V Of-St=320V, 50A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
320B	-	TSP320SB	Thy-SPD	V Of-St=320V, 80A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
320C	-	TSP320SC	Thy-SPD	V Of-St=320V, 100A(1ms), Bidir.	DO-214AA	1ba	1ja	Pjt
32B	-	MMHZ5232BPT	Zener diode	5.320..5.880V, Izt=5mA, Zzt=25Ω, 225mW	SOD-123	5d	1a	Chm
32B	-	SMAJ5932B	Zener diode	20V±5%, Izt=18.7mA, Zzt=14.0Ω, 1.5W	DO-214AC	1d	1a	Mco
32LL	-	SSM32LLPT	Si-diode	SBR, 20V, 3A, Vf<0.27V(3A)	DO-214AC	1d	1a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
32LS	-	SSM32LSPT	Si-diode	SBR, 20V, 3A, Vf<0.4V(3A)	SMA-S	8d	1a	Chm
32S	-	MMHZ5232SPT	Zener diode	5.488..5.712V, Izt=5mA, Zzt=25Ω, 225mW	SOD-123	5d	1a	Chm
33	-	BZY55-C33	Zener diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 500mW	0805	70d	2d	Tsc
33	-	CDZ55C33	Zener diode	31.35..34.65V, Zzt=80Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
33	-	CDZ55C33S	Zener diode	31.35..34.65V, Zzt=80Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
33	-	CDZ55C33T	Zener diode	31.35..34.65V, Zzt=80Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
33	-	CTZ55C33	Zener diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 500mW	1206	70d	2d	Ctc
33	-	CZRNC55C33-G	Zener diode	31.35..34.65V, Zt=80Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
33	-	CZRSC55C33-G	Zener diode	31.35..34.65V, Zt=80Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
33	-	HMSZ5233B	Zener diode	6V±5%, Izt=20mA, Zzt=7Ω, 225mW	SOD-323	5d	1d	Hsn
33	-	HZC3.3	Zener diode	3.3V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
33	-	KDZ3.3EV	Zener diode	3.1..3.5V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
33	-	KDZ3.3V	Zener diode	3.1..3.5V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
33	-	KDZ33VV	Zener diode	31.0..35.0V, Izt=2mA, Zzt=250Ω, 100mW	VSC	7d	1a	Kec
33	-	MAZ83300H	Zener diode	33.2..34.9V, Zzt=200Ω(2mA), 150mW	SC-76	6d	1a	Pan
33	-	MAZS330	Zener diode	31..35V, Iz=2mA, 200mW	SOD-523	6d	1a	Pan
33	-	MAZY330	Zener diode	29.7..36.3V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
33	-	MMPZ5257SPT	Zener diode	32.34..33.66V, Izt=5mA, Zzt=88Ω, 225mW	SOD-323	5d	1a	Chm
33	-	P4SMA33	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 9.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
33	-	SMA3C33	Zener diode	33V±5%, Izt=23mA, Zzt<20Ω, 3W	DO-214AC	1d	1a	Exc
33	-	SMBG33	TVS	Vrwm=33V, Vbr=36.7..46.5V, 10.2A, 600W(1ms)	DO-215AA	5d	1a	Msc
33	-	SML4752	Zener diode	33V±5%, Izt=7.5mA, Zzt=45Ω, 1W	DO-214AC	1d	1k	Vs
33	-	SS3P3	Si-diode	SBR, 30V, 3A, Vf<0.58V(3A)	DO-220AA	8d	1k	Vs
33	-	TZD3.3WS	Zener diode	3.10..3.50V, Izt=5mA, Zzt=130Ω, 200mW	SOD-323	5d	1a	Ttr
33	-	TZD3.3WT	Zener diode	3.10..3.50V, Izt=5mA, Zzt=130Ω, 150mW	SOD-523	6d	1a	Ttr
33	-	TZD33WU	Zener diode	32.15..33.79V, Izt=2mA, Zzt=250Ω, 100mW	SOD-723	7d	1a	Ttr
33	-	U1ZB33	Zener diode	29.7..36.3V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos
33	-	USFZ33V	Zener diode	33V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
33	-	ZD5233BS2	Zener diode	6.0V±5%, 20mA, Zzt=7.0Ω, 500mW	SOD-323	5d	1a	Cys
33	ah	HZC33	Zener diode	33V±10%, Iz=2mA, 150mW	SOD-523	6d	1a	Ren
33	ay	CRZ33	Zener diode	29.7..36.3V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
33-	-	MAZ83300M	Zener diode	32.2..33.8V, Zzt=200Ω(2mA), 150mW	SC-76	6d	1a	Pan
33-	-	MAZ8330GML	Zener diode	32.2..33.8V, Zzt=200Ω(2mA), 150mW	SMini2-F3	6d	1a	Pan
33-	-	MAZS3300M	Zener diode	32.2..33.8V, Iz=2mA, 200mW	SOD-523	6d	1a	Pan
33^	-	MAZ83300H	Zener diode	33.2..34.9V, Zzt=200Ω(2mA), 150mW	SC-76	6d	1a	Pan
33^	-	MAZ8330GHL	Zener diode	33.2..34.9V, Zzt=200Ω(2mA), 150mW	SMini2-F3	6d	1a	Pan
33^	-	MAZS3300H	Zener diode	33.2..34.9V, Iz=2mA, 200mW	SOD-523	6d	1a	Pan
33_	-	MAZ83300L	Zener diode	31.2..32.8V, Zzt=200Ω(2mA), 150mW	SC-76	6d	1a	Pan
33_	-	MAZ8330GLL	Zener diode	31.2..32.8V, Zzt=200Ω(2mA), 150mW	SMini2-F3	6d	1a	Pan
33_	-	MAZS3300L	Zener diode	31.2..32.8V, Iz=2mA, 200mW	SOD-523	6d	1a	Pan
33•	-	RKZ33BKG	Zener diode	31.0..35.0V, Izt=2mA, Zzt=80Ω, 200mW	URP	5d	2e	Ren
33•	-	RKZ33BKJ	Zener diode	31.0..35.0V, Izt=2mA, Zzt=80Ω, 150mW	UFP	7d	2e	Ren
33•	-	TZD3.3YWS	Zener diode	3.25..3.50V, Izt=5mA, Zzt=130Ω, 200mW	SOD-323	5d	1a	Ttr
33•	-	TZD3.3YWT	Zener diode	3.25..3.50V, Izt=5mA, Zzt=130Ω, 150mW	SOD-523	6d	1a	Ttr
33•	aj	HZU33B	Zener diode	31.0..35.0V, Izt=2mA, Zzt=80Ω, 200mW	URP	5d	1a	Ren
330	-	HZU33-1L	Zener diode	31.2..32.6V, Izt=0.5mA, Zzt=250Ω, 150mW	URP	5d	1a	Ren
330	-	MAZX330	Zener diode	297..363V, Zzt=5Ω(0.5mA), 1W	NMiniP2	1d	1a	Pan
330	-	U1ZB330	Zener diode	297..363V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
330X	-	U1ZB330-X	Zener diode	310..330V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
330Y	-	U1ZB330-Y	Zener diode	320..340V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
330Z	-	U1ZB330-Z	Zener diode	330..350V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
331	-	HZU33-2L	Zener diode	32.2..33.6V, Izt=0.5mA, Zzt=250Ω, 150mW	URP	5d	1a	Ren
332	-	HZU33-3L	Zener diode	33.2..34.6V, Izt=0.5mA, Zzt=250Ω, 150mW	URP	5d	1a	Ren
333B	-	CZRC5333B-G	Zener diode	3.3V±5%, Zzt=3.0Ω, Izm=1437mA, 5W	DO-214AB	1d	1a	Cmc
333B	-	Z5SMB5333B	Zener diode	3.1..3.5V, Izt=380mA, 5W	DO-214AA	1d	1ab	Ttr
334B	-	CZRC5334B-G	Zener diode	3.6V±5%, Zzt=2.5Ω, Izm=1317mA, 5W	DO-214AB	1d	1a	Cmc
334B	-	Z5SMB5334B	Zener diode	3.4..3.8V, Izt=350mA, 5W	DO-214AA	1d	1ab	Ttr
334B	-	Z5SMC5334B	Zener diode	3.42..3.78V, Izt=350mA, 5W	DO-214AB	1d	1a	Ttr
335B	-	CZRC5335B-G	Zener diode	3.9V±5%, Zzt=2.0Ω, Izm=1216mA, 5W	DO-214AB	1d	1a	Cmc
335B	-	Z5SMB5335B	Zener diode	3.7..4.1V, Izt=320mA, 5W	DO-214AA	1d	1ab	Ttr
335B	-	Z5SMC5335B	Zener diode	3.71..4.10V, Izt=320mA, 5W	DO-214AB	1d	1a	Ttr
336B	-	CZRC5336B-G	Zener diode	4.3V±5%, Zzt=2.0Ω, Izm=1103mA, 5W	DO-214AB	1d	1a	Cmc
336B	-	Z5SMB5336B	Zener diode	4.1..4.5V, Izt=290mA, 5W	DO-214AA	1d	1ab	Ttr
336B	-	Z5SMC5336B	Zener diode	4.09..4.52V, Izt=290mA, 5W	DO-214AB	1d	1a	Ttr
337B	-	CZRC5337B-G	Zener diode	4.7V±5%, Zzt=2.0Ω, Izm=1009mA, 5W	DO-214AB	1d	1a	Cmc
337B	-	Z5SMB5337B	Zener diode	4.5..4.9V, Izt=260mA, 5W	DO-214AA	1d	1ab	Ttr
337B	-	Z5SMC5337B	Zener diode	4.47..4.94V, Izt=260mA, 5W	DO-214AB	1d	1a	Ttr
338B	-	CZRC5338B-G	Zener diode	5.1V±5%, Zzt=1.5Ω, Izm=930mA, 5W	DO-214AB	1d	1a	Cmc
338B	-	SMBJ5338B	Zener diode	5.1V±5%, Izt=240mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1w	Mco
338B	-	Z5SMB5338B	Zener diode	4.8..5.4V, Izt=240mA, 5W	DO-214AA	1d	1ab	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
338B	-	Z5SMC5338B	Zener diode	4.85..5.36V, Izt=240mA, 5W	DO-214AB	1d	1a	Ttr
339B	-	CZRC5339B-G	Zener diode	5.6V±5%, Zzt=1.0Ω, Izm= 846mA, 5W	DO-214AB	1d	1a	Cmc
339B	-	SMBJ5339B	Zener diode	5.6V±5%, Izt=220mA, Zzt=1Ω, 5W	DO-214AA	1d	1w	Mco
339B	-	Z5SMB5339B	Zener diode	5.3..5.9V, Izt=220mA, 5W	DO-214AA	1d	1ab	Ttr
339B	-	Z5SMC5339B	Zener diode	5.32..5.88V, Izt=220mA, 5W	DO-214AB	1d	1a	Ttr
33A	-	1.5SMC33A	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, Ipp=33A, 1500W(1ms)	403	3d	2t	Ons
33A	-	1.5SMC33A	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, Ipp=33A, 1500W(1ms)	DO-214AB	1d	1k	Vs
33A	-	1.5SMC33A	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, Ipp=33A, 1500W(1ms)	DO-214AB	1d	1b	Mde
33A	-	1.5SMC33A	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, Ipp=33A, 1500W(1ms)	DO-214AB	1d	2s	Lif
33A	-	1SMC33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, 28.1A, 1500W(1ms)	DO-214AB	1d	1a	Eic
33A	-	MMF33A	TVS	Vrwm=33V, Vbr=36.7..42.2V, Ipp=3.8A, 200W(1ms)	SOD-123FL	7d	2m	Sst
33A	-	P4SMA33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9.0A, 400W(1ms)	DO-214AC	1d	1k	Vs
33A	-	P4SMA33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
33A	-	P6SMB33A	TVS	Vrwm=33V, Vbr=31.4..34.7V, 13.1A, 600W(1ms)	403A	3d	1s	Ons
33A	-	P6SMB33A	TVS	Vrwm=33V, Vbr=31.4..34.7V, 13.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
33A	-	P6SMBJ33A	TVS	Vrwm=33V, Vbr=29.7..36.3V, 13.2A, 600W(1ms)	DO-214AA	1d	1n	Lif
33A	-	RKZ33AKU	Zener diode	29.68..31.22V, Izt=5mA, Zzt=80Ω, 500mW	TURP-FM	7d	1a	Ren
33A	-	SMAJ33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, 7.5A, 400W(1ms)	DO-214AC	1d	1a	Sus
33A	-	SMAJP4KE33A	TVS	Vrwm=28.20V, Vbr=31.40..34.70V, Ipp=9.0A, 400W(1ms)	DO-214AC	1d	1a	Mco
33A	-	SMBG33A	TVS	Vrwm=33V, Vbr=36.7..42.2V, 11.3A, 600W(1ms)	DO-215AA	5d	1a	Msc
33A	-	SMBJ33A	TVS	Vrwm=33V, Vbr=36.7..42.2V, 11.3A, 600W(1ms)	DO-214AA	1d	1a	Sus
33A	-	SMBJP6KE33A	TVS	Vrwm=28.20V, Vbr=31.40..34.70V, Ipp=13.3A, 600W(1ms)	DO-214AA	1d	1a	Mco
33A	-	SMCJ1.5KE33A	TVS	Vrwm=28.20V, Vbr=31.40..34.70V, Ipp=33.3A, 1500W(1ms)	DO-214AB	1d	1a	Mco
33A	-	SMCJ33A	TVS	Vrwm=33V, Vbr=36.7..44.9V, 25.4A, 1500W(1ms)	DO-214AB	1d	1k	Sus
33A	-	SMF33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, Ipp=3.8A, 200W(1ms)	SOD-123FL	7d	1a	Mco
33A	-	SZP6SMB33A	TVS	Vrwm=33V, Vbr=31.4..34.7V, 13.1A, 600W(1ms)	403A	3d	1s	Ons
33A	-	TVP04A330A-G	TVS	Vbr=31.35..34.65V, Vrwm=28.2V, Ipp=8.75A, 400W(1ms)	DO-214AC	1d	2o	Cmc
33A	-	TVP06B33A-G	TVS	Vrwm=28.2V, Vbr=31.35..34.65V, Ipp=13.13A, 600W(1ms)	DO-214AA	1d	2o	Cmc
33A	-	UMA33A	TVS	Vrwm=33V, Vbr=36.7..53.3V, 9.4A, 500W(1ms)	UltraMite	14d	1v	Msc
33AP	-	15TPSMC33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 33.3A, 1500W(1ms)	DO-214AB	1d	1p	Lif
33AP	-	4TPSMA33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9.0A, 400W(1ms)	DO-214AC	1d	1p	Lif
33AP	-	6TPSMB33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 13.3A, 600W(1ms)	DO-214AA	1d	1p	Lif
33B	-	1PMT5933B	Zener diode	22V±5%, Izt=68mA, 2.5W	DO-216AA	4d	1g	Ons
33B	-	1SMB3EZ33	Zener diode	33V±5%, Zzt=23Ω, Izt=23.0mA, 3W	DO-214AA	1d	1a	Pjt
33B	-	HZF33BP	Zener diode	33V±5%, Iz=10mA, 900mW	LRP	1d	2f	Ren
33B	-	MMHZ5233BPT	Zener diode	5.700..6.300V, Izt=5mA, Zzt=25Ω, 225mW	SOD-123	5d	1a	Chm
33B	-	PTZ33B	Zener diode	33V±10%, Izt=10mA, 1W	DO-214AC	1d	1a	Rhm
33B	-	RKZ33BKU	Zener diode	30.32..31.88V, Izt=5mA, Zzt=80Ω, 500mW	TURP-FM	7d	1a	Ren
33B	-	SMAJ5933B	Zener diode	22V±5%, Izt=17.0mA, Zzt=17.5Ω, 1.5W	DO-214AC	1d	1a	Mco
33B	-	Z3SMB33B	Zener diode	31.35..34.65V, Izt=23mA, Zzt=20Ω, 3W	DO-214AA	1d	1a	Ttr
33C	-	1.5SMC33CA	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, Ipp=33A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
33C	-	1.5SMC33CA	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, Ipp=33A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
33C	-	1.5SMC33CA	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, Ipp=33A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
33C	-	HZF33CP	Zener diode	33V±10%, Iz=10mA, 900mW	LRP	1d	2f	Ren
33C	-	P4SMA33C	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 9.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
33C	-	P4SMA33CA	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
33C	-	P6SMB33CA	TVS	Vrwm=33V, Vbr=31.4..34.7V, 13.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
33C	-	P6SMBJ33C	TVS	Vrwm=33V, Vbr=29.7..36.3V, 12.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
33C	-	RKZ33CKU	Zener diode	30.90..32.50V, Izt=5mA, Zzt=80Ω, 500mW	TURP-FM	7d	1a	Ren
33C	-	SMAJP4KE33CA	TVS	Vrwm=28.20V, Vbr=31.40..34.70V, Ipp=9.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
33C	-	SMB33C	TVS	Vbr=36.7..44.9V, Vrwm=33V, 10.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
33C	-	SMBG33C	TVS	Vrwm=33V, Vbr=36.7..46.5V, 10.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
33C	-	SMBJP6KE33CA	TVS	Vrwm=28.20V, Vbr=31.40..34.70V, Ipp=13.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
33C	-	SMCJ1.5KE33CA	TVS	Vrwm=28.20V, Vbr=31.40..34.70V, Ipp=33.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
33C	-	TVP04A330CA-G	TVS	Vbr=31.35..34.65V, Vrwm=28.2V, Ipp=8.75A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
33C	-	TVP06B33ACA-G	TVS	Vrwm=28.2V, Vbr=31.35..34.65V, Ipp=13.13A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
33CA	-	1SMC33CA	TVS	Vbr=36.7..40.6V, Vrwm=33V, 28.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
33CA	-	MMF33CA	TVS	Vrwm=33V, Vbr=36.7..42.2V, Ipp=3.8A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
33CA	-	P4SMA33CA	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
33CA	-	P6SMB33CA	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 13.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
33CA	-	P6SMBJ33CA	TVS	Vrwm=33V, Vbr=29.7..36.3V, 13.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
33CA	-	SMAJ33CA	TVS	Vrwm=33V, Vbr=36.7..40.6V, 7.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
33CA	-	SMBG33CA	TVS	Vrwm=33V, Vbr=36.7..42.2V, 11.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
33CA	-	SMBJ33CA	TVS	Vrwm=33V, Vbr=36.7..42.2V, 11.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
33CA	-	SMCJ33CA	TVS	Vrwm=33V, Vbr=36.7..44.9V, 25.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
33CA	-	SMF33CA	TVS	Vbr=36.7..40.6V, Vrwm=33V, Ipp=3.8A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
33CA	-	UMA33CA	TVS	Vrwm=33V, Vbr=36.7..53.3V, 9.4A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
33CP	-	15TPSMC33CA	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 33.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
33CP	-	4TPSMA33CA	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1p	Lif
33CP	-	6TPSMB33CA	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 13.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
33G	-	ZD33G-CA2	Zener diode	33V±5%, Zzt=250Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
33G	-	ZD33G-CB2	Zener diode	33V±5%, Zzt=250Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
33L	-	SSA33L	Si-diode	SBR, 30V, 3A, Vf<0.49V(3A)	DO-214AC	1d	1k	Vs
33L	-	ZD33L-CA2	Zener diode	33V±5%, Zzt=250Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
33L	-	ZD33L-CB2	Zener diode	33V±5%, Zzt=250Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
33LS	-	SSM33LSPT	Si-diode	SBR, 30V, 3A, Vf<0.4V(3A)	SMA-S	8d	1a	Chm
33P	-	BZD27C33P	Zener diode	31.35..34.65V, Zzt=15Ω, Izt=25mA, 800mW	SOD-123FL	7d	1a	Pjt
33P	-	MFPZ33	Zener diode	31.35..34.65V, Izt=25mA, Zzt=12Ω, 800mW	SOD-123FL	7d	1a	Ttr
33S	-	MMHZ5233SPT	Zener diode	5.880..6.120V, Izt=5mA, Zzt=25Ω, 225mW	SOD-123	5d	1a	Chm
33V	-	SMA33	TVS	Vbr=36.7..44.9V, Vrwm=33.0V, 5.1A, 300W(1ms)	DO-214AC	1d	1a	Mic
33V	-	SMB33	TVS	Vbr=36.7..44.9V, Vrwm=33V, 10.2A, 600W(1ms)	DO-214AA	1d	1a	Mic
33V	-	SMC33	TVS	Vbr=36.7..44.9V, Vrwm=33V, 25.4A, 1500W(1ms)	DO-214AB	1d	1a	Mic
33VA	-	SMA33A	TVS	Vbr=36.7..40.6V, Vrwm=33.0V, 5.6A, 300W(1ms)	DO-214AC	1d	1a	Mic
33VA	-	SMB33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, 11.3A, 600W(1ms)	DO-214AA	1d	1a	Mic
33VA	-	SMC33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, 28.1A, 1500W(1ms)	DO-214AB	1d	1a	Mic
33VB	-	BZT52B33	Zener diode	32.34..33.66V, Izt=2mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tsc
33VB	-	MMSZ33VBW	Zener diode	32.34..33.66V, Izt=2mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tac
33VC	-	SMA33C	TVS	Vbr=36.7..44.9V, Vrwm=33.0V, 5.1A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
33VC	-	SMB33C	TVS	Vrwm=33V, Vbr=36.7..46.5V, 10.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
33VC	-	SMC33C	TVS	Vbr=36.7..44.9V, Vrwm=33V, 25.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
33VCA	-	SMA33CA	TVS	Vbr=36.7..40.6V, Vrwm=33.0V, 5.6A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
33VCA	-	SMB33CA	TVS	Vbr=36.7..40.6V, Vrwm=33V, 11.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
33VCA	-	SMC33CA	TVS	Vbr=36.7..40.6V, Vrwm=33V, 28.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
33VZ	-	BZT52C33	Zener diode	31.35..34.65V, Izt=2mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tsc
33VZ	-	MMSZ33VCW	Zener diode	31.35..34.65V, Izt=2mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tac
33VZ	-	TCMMSZ33V	Zener diode	33V±5%, Izt=5mA, Zzt=75Ω, 500mW	SOD-123FL	7d	1a	Tac
33VZ	-	ZGFM0533C-MH	Zener diode	31.35..34.65V, Izt=5mA, Zzt=75Ω, 500mW	SOD-123	5d	1a	Pic
34	-	CHSDCDJGP	Si-diode	SBD, 40V, 3A, Vf<0.5V(3A), 200pF	SOD-123J	7d	1a	Chm
34	-	HMSZ5234B	Zener diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 225mW	SOD-323	5d	1d	Hsn
34	-	SS3P4	Si-diode	SBR, 40V, 3A, Vf<0.6V(3A)	DO-220AA	8d	1k	Vs
34	-	ZD5234BS2	Zener diode	6.2V±5%, 20mA, Zzt=7.0Ω, 500mW	SOD-323	5d	1a	Cys
340B	-	CZRC5340B-G	Zener diode	6.0V±5%, Zzt=1.0Ω, Izm=790mA, 5W	DO-214AB	1d	1a	Cmc
340B	-	SMBJ5340B	Zener diode	6V±5%, Izt=200mA, Zzt=1 1Ω, 5W	DO-214AA	1d	1w	Mco
340B	-	Z5SMB5340B	Zener diode	5.7..6.3V, Izt=200mA, 5W	DO-214AA	1d	1ab	Ttr
340B	-	Z5SMC5340B	Zener diode	5.70..6.30V, Izt=200mA, 5W	DO-214AB	1d	1a	Ttr
341B	-	CZRC5341B-G	Zener diode	6.2V±5%, Zzt=1.0Ω, Izm=765mA, 5W	DO-214AB	1d	1a	Cmc
341B	-	SMBJ5341B	Zener diode	6.2V±5%, Izt=200mA, Zzt=1Ω, 5W	DO-214AA	1d	1w	Mco
341B	-	Z5SMB5341B	Zener diode	5.9..6.5V, Izt=200mA, 5W	DO-214AA	1d	1ab	Ttr
341B	-	Z5SMC5341B	Zener diode	5.89..6.51V, Izt=200mA, 5W	DO-214AB	1d	1a	Ttr
342B	-	1SMC5342	Zener diode	6.46..7.14V, Zzt=1Ω, Izt=175mA, 5W	DO-214AB	1d	1a	Pjt
342B	-	CZRC5342B-G	Zener diode	6.8V±5%, Zzt=1.0Ω, Izm=700mA, 5W	DO-214AB	1d	1a	Cmc
342B	-	SMBJ5342B	Zener diode	6.8V±5%, Izt=175mA, Zzt=1Ω, 5W	DO-214AA	1d	1w	Mco
342B	-	Z5SMB5342B	Zener diode	6.5..7.1V, Izt=175mA, 5W	DO-214AA	1d	1ab	Ttr
342B	-	Z5SMC5342B	Zener diode	6.46..7.14V, Izt=175mA, 5W	DO-214AB	1d	1a	Ttr
343B	-	1SMC5343	Zener diode	7.13..7.88V, Zzt=2Ω, Izt=175mA, 5W	DO-214AB	1d	1a	Pjt
343B	-	CZRC5343B-G	Zener diode	7.5V±5%, Zzt=1.5Ω, Izm=630mA, 5W	DO-214AB	1d	1a	Cmc
343B	-	SMBJ5343B	Zener diode	7.5V±5%, Izt=175mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1w	Mco
343B	-	Z5SMB5343B	Zener diode	7.1..7.9V, Izt=175mA, 5W	DO-214AA	1d	1ab	Ttr
343B	-	Z5SMC5343B	Zener diode	7.13..7.88V, Izt=175mA, 5W	DO-214AB	1d	1a	Ttr
344B	-	1SMC5344	Zener diode	7.79..8.61V, Zzt=2Ω, Izt=150mA, 5W	DO-214AB	1d	1a	Pjt
344B	-	CZRC5344B-G	Zener diode	8.2V±5%, Zzt=1.5Ω, Izm=580mA, 5W	DO-214AB	1d	1a	Cmc
344B	-	SMBJ5344B	Zener diode	8.2V±5%, Izt=150mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1w	Mco
344B	-	Z5SMB5344B	Zener diode	7.8..8.6V, Izt=150mA, 5W	DO-214AA	1d	1ab	Ttr
344B	-	Z5SMC5344B	Zener diode	7.79..8.61V, Izt=150mA, 5W	DO-214AB	1d	1a	Ttr
345B	-	1SMC5345	Zener diode	8.27..9.14V, Zzt=2Ω, Izt=150mA, 5W	DO-214AB	1d	1a	Pjt
345B	-	CZRC5345B-G	Zener diode	8.7V±5%, Zzt=2.0Ω, Izm=545mA, 5W	DO-214AB	1d	1a	Cmc
345B	-	SMBJ5345B	Zener diode	8.7V±5%, Izt=150mA, Zzt=2Ω, 5W	DO-214AA	1d	1w	Mco
345B	-	Z5SMB5345B	Zener diode	8.3..9.1V, Izt=150mA, 5W	DO-214AA	1d	1ab	Ttr
345B	-	Z5SMC5345B	Zener diode	8.27..9.14V, Izt=150mA, 5W	DO-214AB	1d	1a	Ttr
346B	-	1SMC5346	Zener diode	8.65..9.56V, Zzt=2Ω, Izt=150mA, 5W	DO-214AB	1d	1a	Pjt
346B	-	CZRC5346B-G	Zener diode	9.1V±5%, Zzt=2.0Ω, Izm=520mA, 5W	DO-214AB	1d	1a	Cmc
346B	-	SMBJ5346B	Zener diode	9.1V±5%, Izt=150mA, Zzt=2Ω, 5W	DO-214AA	1d	1w	Mco
346B	-	Z5SMB5346B	Zener diode	8.7..9.6V, Izt=150mA, 5W	DO-214AA	1d	1ab	Ttr
346B	-	Z5SMC5346B	Zener diode	8.65..9.56V, Izt=150mA, 5W	DO-214AB	1d	1a	Ttr
347B	-	1SMC5347	Zener diode	9.5..10.5V, Zzt=2Ω, Izt=125mA, 5W	DO-214AB	1d	1a	Pjt
347B	-	CZRC5347B-G	Zener diode	10.0V±5%, Zzt=2.0Ω, Izm=475mA, 5W	DO-214AB	1d	1a	Cmc
347B	-	SMBJ5347B	Zener diode	10V±5%, Izt=125mA, Zzt=2Ω, 5W	DO-214AA	1d	1w	Mco
347B	-	Z5SMB5347B	Zener diode	9.5..10.5V, Izt=125mA, 5W	DO-214AA	1d	1ab	Ttr
347B	-	Z5SMC5347B	Zener diode	9.50..10.50V, Izt=125mA, 5W	DO-214AB	1d	1a	Ttr
348B	-	1SMC5348	Zener diode	10.4..11.55V, Zzt=3Ω, Izt=125mA, 5W	DO-214AB	1d	1a	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
348B	-	CZRC5348B-G	Zener diode	11.0V±5%, Zzt=2.5Ω, Izm=430mA, 5W	DO-214AB	1d	1a	Cmc
348B	-	SMBJ5348B	Zener diode	11V±5%, Izt=125mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1w	Mco
348B	-	Z5SMB5348B	Zener diode	10.5..11.6V, Izt=125mA, 5W	DO-214AA	1d	1ab	Ttr
348B	-	Z5SMC5348B	Zener diode	10.45..11.55V, Izt=125mA, 5W	DO-214AB	1d	1a	Ttr
349B	-	1SMC5349	Zener diode	11.4..12.6V, Zzt=3Ω, Izt=100mA, 5W	DO-214AB	1d	1a	Pjt
349B	-	CZRC5349B-G	Zener diode	12.0V±5%, Zzt=2.5Ω, Izm=395mA, 5W	DO-214AB	1d	1a	Cmc
349B	-	SMBJ5349B	Zener diode	12V±5%, Izt=100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1w	Mco
349B	-	Z5SMB5349B	Zener diode	11.4..12.6V, Izt=100mA, 5W	DO-214AA	1d	1ab	Ttr
349B	-	Z5SMC5349B	Zener diode	11.40..12.60V, Izt=100mA, 5W	DO-214AB	1d	1a	Ttr
34AS	-	SSM34LASPT	Si-diode	SBR, 40V, 3A, Vf<0.38V(3A)	SMA-S	8d	1a	Chm
34B	-	1PMT5934B	Zener diode	24V±5%, Izt=62mA, 2.5W	DO-216AA	4d	1g	Ons
34B	-	MMHZ5234BPT	Zener diode	5.890..6.510V, Izt=5mA, Zzt=10Ω, 225mW	SOD-123	5d	1a	Chm
34B	-	SMAJ5934B	Zener diode	24V±5%, Izt=15.6mA, Zzt=19.0Ω, 1.5W	DO-214AC	1d	1a	Mco
34LA	-	SSM34LAPT	Si-diode	SBR, 40V, 3A, Vf<0.38V(3A)	DO-214AC	1d	1a	Chm
34LS	-	SSM34LSPT	Si-diode	SBR, 40V, 3A, Vf<0.4V(3A)	SMA-S	8d	1a	Chm
34S	-	MMHZ5234SPT	Zener diode	6.070..6.324V, Izt=5mA, Zzt=10Ω, 225mW	SOD-123	5d	1a	Chm
35	-	BZX584B3V3	Zener diode	3.23..3.37V, Izt=5mA, Zzt=95Ω, 200mW	SOD-523FL	7d	1a	Tac
35	-	EDZ13B	Zener diode	12.91..13.49V, Izt=5mA, Zzt=37Ω, 150mW	SOD-523	6d	1a	Rhm
35	-	EDZV13B	Zener diode	12.91..13.49V, Izt=5.0mA, Zzt=37Ω, 150mW	SOD-523	6d	2v	Rhm
35	-	FDZ13EV	Zener diode	12.910..13.490V, Izt=5mA, Zzt=37Ω, 150mW	SOD-523	6d	1a	Fis
35	-	FDZ13VT	Zener diode	12.910..13.490V, Izt=5mA, Zzt=37Ω, 200mW	SOD-323	5d	1a	Fis
35	-	GDZ2V7B-V-G	Zener diode	2.69..2.91V, Izt=5mA, Zzt=110Ω, 200mW	SOD-323	5d	2m	Vs
35	-	HMSZ5235B	Zener diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 225mW	SOD-323	5d	1d	Hsn
35	-	LBZT52B13T1G	Zener diode	12.91..13.49V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
35	-	LEDZ13BT1G	Zener diode	12.91..13.49V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
35	-	LUDZS13BT1G	Zener diode	12.91..13.49V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
35	-	MM5Z3V3B	Zener diode	3.23..3.37V, Izt=5mA, Zzt=95Ω, 200mW	SOD-523FL	7d	1a	Tac
35	-	SS3P5	Si-diode	SBR, 50V, 3A, Vf<0.78V(3A)	DO-220AA	8d	1k	Vs
35	-	TDZ13B	Zener diode	13V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
35	-	UDZS13B	Zener diode	12.91..13.49V, Izt=5mA, Zzt=37Ω, 200mW	SOD-323	5d	1a	Wtr
35	-	UDZS13B	Zener diode	13V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
35	-	UDZV13B	Zener diode	12.91..13.49V, Izt=5.0mA, Zzt=37Ω, 200mW	SOD-323	5d	2v	Rhm
35	-	VDZS13B	Zener diode	13V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
35	-	ZD5235BS2	Zener diode	6.8V±5%, 20mA, Zzt=5.0Ω, 500mW	SOD-323	5d	1a	Cys
350	-	P4SMA350	TVS	Vbr=315..385V, Vrwm=284V, 0.79A, 400W(1ms)	DO-214AC	1d	1a	Eic
350A	-	1.5SMC350A	TVS	Vrwm=300.0V, Vbr=300..332V, Ipp=3.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
350A	-	1.5SMC350A	TVS	Vrwm=300.0V, Vbr=300..332V, Ipp=3.2A, 1500W(1ms)	DO-214AB	1d	2s	Lif
350A	-	1.5SMC350A	TVS	Vrwm=300.0V, Vbr=300..332V, Ipp=3.2A, 1500W(1ms)	DO-214AB	1d	1b	Mde
350A	-	P4SMA350A	TVS	Vbr=332..368V, Vrwm=300V, 0.83A, 400W(1ms)	DO-214AC	1d	1k	Vs
350A	-	P4SMA350A	TVS	Vbr=315..385V, Vrwm=284V, 0.79A, 400W(1ms)	DO-214AC	1d	1a	Eic
350A	-	P6SMB350A	TVS	Vbr=332..368V, Vrwm=300V, 1.25A, 600W(1ms)	DO-214AA	1d	1k	Vs
350A	-	SMAJP4KE350A	TVS	Vrwm=300.0V, Vbr=332.0..368.0V, Ipp=0.9A, 400W(1ms)	DO-214AC	1d	1a	Mco
350A	-	SMBJP6KE350A	TVS	Vrwm=300.0V, Vbr=332.0..368.0V, Ipp=1.3A, 600W(1ms)	DO-214AA	1d	1a	Mco
350A	-	SMCJ1.5KE350A	TVS	Vrwm=300.0V, Vbr=332.0..368.0V, Ipp=3.2A, 1500W(1ms)	DO-214AB	1d	1a	Mco
350A	-	TVP04A351A-G	TVS	Vbr=332.50..367.50V, Vrwm=299.3V, Ipp=0.83A, 400W(1ms)	DO-214AC	1d	2o	Cmc
350A	-	TVP06B351A-G	TVS	Vrwm=299.3V, Vbr=332.50..367.50V, Ipp=1.24A, 600W(1ms)	DO-214AA	1d	2o	Cmc
350B	-	1SMC5350	Zener diode	12.35..13.65V, Zzt=3Ω, Izt=100mA, 5W	DO-214AB	1d	1a	Pjt
350B	-	CZRC5350B-G	Zener diode	13.0V±5%, Zzt=2.5Ω, Izm=365mA, 5W	DO-214AB	1d	1a	Cmc
350B	-	SMBJ5350B	Zener diode	13V±5%, Izt=100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1w	Mco
350B	-	Z5SMB5350B	Zener diode	12.4..13.7V, Izt=100mA, 5W	DO-214AA	1d	1ab	Ttr
350B	-	Z5SMC5350B	Zener diode	12.35..13.65V, Izt=100mA, 5W	DO-214AB	1d	1a	Ttr
350C	-	1.5SMC350CA	TVS	Vrwm=300.0V, Vbr=300..332V, Ipp=3.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
350C	-	1.5SMC350CA	TVS	Vrwm=300.0V, Vbr=300..332V, Ipp=3.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
350C	-	1.5SMC350CA	TVS	Vrwm=300.0V, Vbr=332.0..368.0V, 3.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Fee
350C	-	P4SMA350C	TVS	Vbr=315..385V, Vrwm=284V, 0.79A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
350C	-	SMAJP4KE350CA	TVS	Vrwm=300.0V, Vbr=332.0..368.0V, Ipp=0.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
350C	-	SMBJP6KE350CA	TVS	Vrwm=300.0V, Vbr=332.0..368.0V, Ipp=1.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
350C	-	SMCJ1.5KE350CA	TVS	Vrwm=300.0V, Vbr=332.0..368.0V, Ipp=3.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
350C	-	TVP04A351CA-G	TVS	Vbr=332.50..367.50V, Vrwm=299.3V, Ipp=0.83A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
350C	-	TVP06B351ACA-G	TVS	Vrwm=299.3V, Vbr=332.50..367.50V, Ipp=1.24A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
350CA	-	P4SMA350CA	TVS	Vbr=332..368V, Vrwm=300V, 0.83A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
350CA	-	P6SMB350CA	TVS	Vbr=332..368V, Vrwm=300V, 1.25A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
3510	-	SZ3510	Zener diode	10V±5%, Izt=37.5mA, Zzt=4.5Ω, 1.5W	DO-214AC	1d	1a	Eic
3511	-	SZ3511	Zener diode	11V±5%, Izt=34.1mA, Zzt=5.5Ω, 1.5W	DO-214AC	1d	1a	Eic
3512	-	SZ3512	Zener diode	12V±5%, Izt=31.2mA, Zzt=6.5Ω, 1.5W	DO-214AC	1d	1a	Eic
3513	-	SZ3513	Zener diode	13V±5%, Izt=28.8mA, Zzt=7.0Ω, 1.5W	DO-214AC	1d	1a	Eic
3515	-	SZ3515	Zener diode	15V±5%, Izt=25.0mA, Zzt=9.0Ω, 1.5W	DO-214AC	1d	1a	Eic
3516	-	SZ3516	Zener diode	16V±5%, Izt=23.4mA, Zzt=10Ω, 1.5W	DO-214AC	1d	1a	Eic
3518	-	SZ3518	Zener diode	18V±5%, Izt=20.8mA, Zzt=12Ω, 1.5W	DO-214AC	1d	1a	Eic
351B	-	1SMC5351	Zener diode	13.3..14.7V, Zzt=3Ω, Izt=100mA, 5W	DO-214AB	1d	1a	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
351B	-	CZRC5351B-G	Zener diode	14.0V±5%, Zzt=2.5Ω, Izm=340mA, 5W	DO-214AB	1d	1a	Cmc
351B	-	SMBJ5351B	Zener diode	14V±5%, Izt=100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1w	Mco
351B	-	Z5SMB5351B	Zener diode	13.3..14.7V, Izt=100mA, 5W	DO-214AA	1d	1ab	Ttr
351B	-	Z5SMC5351B	Zener diode	13.30..14.70V, Izt=100mA, 5W	DO-214AB	1d	1a	Ttr
3520	-	SZ3520	Zener diode	20V±5%, Izt=18.7mA, Zzt=14Ω, 1.5W	DO-214AC	1d	1a	Eic
3522	-	SZ3522	Zener diode	22V±5%, Izt=17.0mA, Zzt=17.5Ω, 1.5W	DO-214AC	1d	1a	Eic
3524	-	SZ3524	Zener diode	24V±5%, Izt=15.6mA, Zzt=19Ω, 1.5W	DO-214AC	1d	1a	Eic
3527	-	SZ3527	Zener diode	27V±5%, Izt=13.9mA, Zzt=23Ω, 1.5W	DO-214AC	1d	1a	Eic
352B	-	1SMC5352	Zener diode	14.25..15.75V, Zzt=3Ω, Izt=75mA, 5W	DO-214AB	1d	1a	Pjt
352B	-	CZRC5352B-G	Zener diode	15.0V±5%, Zzt=2.5Ω, Izm=315mA, 5W	DO-214AB	1d	1a	Cmc
352B	-	SMBJ5352B	Zener diode	15V±5%, Izt=75mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1w	Mco
352B	-	Z5SMB5352B	Zener diode	14.3..15.8V, Izt=75mA, 5W	DO-214AA	1d	1ab	Ttr
352B	-	Z5SMC5352B	Zener diode	14.25..15.75V, Izt=75mA, 5W	DO-214AB	1d	1a	Ttr
3530	-	SZ3530	Zener diode	30V±5%, Izt=12.5mA, Zzt=26Ω, 1.5W	DO-214AC	1d	1a	Eic
3533	-	SZ3533	Zener diode	33V±5%, Izt=11.4mA, Zzt=33Ω, 1.5W	DO-214AC	1d	1a	Eic
3536	-	SZ3536	Zener diode	36V±5%, Izt=10.4mA, Zzt=38Ω, 1.5W	DO-214AC	1d	1a	Eic
3539	-	SZ3539	Zener diode	39V±5%, Izt=9.6mA, Zzt=45Ω, 1.5W	DO-214AC	1d	1a	Eic
353B	-	1SMC5353	Zener diode	15.2..16.8V, Zzt=3Ω, Izt=75mA, 5W	DO-214AB	1d	1a	Pjt
353B	-	CZRC5353B-G	Zener diode	16.0V±5%, Zzt=2.5Ω, Izm= 295mA, 5W	DO-214AB	1d	1a	Cmc
353B	-	SMBJ5353B	Zener diode	16V±5%, Izt=75mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1w	Mco
353B	-	Z5SMB5353B	Zener diode	15.2..16.8V, Izt=75mA, 5W	DO-214AA	1d	1ab	Ttr
353B	-	Z5SMC5353B	Zener diode	15.20..16.80V, Izt=75mA, 5W	DO-214AB	1d	1a	Ttr
353D	-	SZ353D	Zener diode	3.3V±5%, Izt=113.6mA, Zzt=10Ω, 1.5W	DO-214AC	1d	1a	Eic
353G	-	SZ353G	Zener diode	3.6V±5%, Izt=104.2mA, Zzt=9.0Ω, 1.5W	DO-214AC	1d	1a	Eic
353J	-	SZ353J	Zener diode	3.9V±5%, Izt=96.1mA, Zzt=7.5Ω, 1.5W	DO-214AC	1d	1a	Eic
3543	-	SZ3543	Zener diode	43V±5%, Izt=8.7mA, Zzt=53Ω, 1.5W	DO-214AC	1d	1a	Eic
3547	-	SZ3547	Zener diode	47V±5%, Izt=8.0mA, Zzt=67Ω, 1.5W	DO-214AC	1d	1a	Eic
354B	-	1SMC5354	Zener diode	16.15..17.85V, Zzt=3Ω, Izt=70mA, 5W	DO-214AB	1d	1a	Pjt
354B	-	CZRC5354B-G	Zener diode	17.0V±5%, Zzt=2.5Ω, Izm=280mA, 5W	DO-214AB	1d	1a	Cmc
354B	-	SMBJ5354B	Zener diode	17V±5%, Izt=70mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1w	Mco
354B	-	Z5SMB5354B	Zener diode	16.2..17.9V, Izt=70mA, 5W	DO-214AA	1d	1ab	Ttr
354B	-	Z5SMC5354B	Zener diode	16.15..17.85V, Izt=70mA, 5W	DO-214AB	1d	1a	Ttr
354D	-	SZ354D	Zener diode	4.3V±5%, Izt=87.2mA, Zzt=6.0Ω, 1.5W	DO-214AC	1d	1a	Eic
354H	-	SZ354H	Zener diode	4.7V±5%, Izt=79.8mA, Zzt=5.0Ω, 1.5W	DO-214AC	1d	1a	Eic
3551	-	SZ3551	Zener diode	51V±5%, Izt=7.3mA, Zzt=70Ω, 1.5W	DO-214AC	1d	1a	Eic
3556	-	SZ3556	Zener diode	56V±5%, Izt=6.7mA, Zzt=86Ω, 1.5W	DO-214AC	1d	1a	Eic
355B	-	1SMC5355	Zener diode	17.1..18.9V, Zzt=3Ω, Izt=65mA, 5W	DO-214AB	1d	1a	Pjt
355B	-	CZRC5355B-G	Zener diode	18.0V±5%, Zzt=2.5Ω, Izm=265mA, 5W	DO-214AB	1d	1a	Cmc
355B	-	SMBJ5355B	Zener diode	18V±5%, Izt=65mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1w	Mco
355B	-	SZ355B	Zener diode	5.1V±5%, Izt=73.5mA, Zzt=4.0Ω, 1.5W	DO-214AC	1d	1a	Eic
355B	-	Z5SMB5355B	Zener diode	17.1..18.9V, Izt=65mA, 5W	DO-214AA	1d	1ab	Ttr
355B	-	Z5SMC5355B	Zener diode	17.10..18.90V, Izt=65mA, 5W	DO-214AB	1d	1a	Ttr
355G	-	SZ355G	Zener diode	5.6V±5%, Izt=66.9mA, Zzt=2.0Ω, 1.5W	DO-214AC	1d	1a	Eic
3562	-	SZ3562	Zener diode	62V±5%, Izt=6.0mA, Zzt=100Ω, 1.5W	DO-214AC	1d	1a	Eic
3568	-	SZ3568	Zener diode	68V±5%, Izt=5.5mA, Zzt=120Ω, 1.5W	DO-214AC	1d	1a	Eic
356B	-	1SMC5356	Zener diode	18.05..19.95V, Zzt=3Ω, Izt=65mA, 5W	DO-214AB	1d	1a	Pjt
356B	-	CZRC5356B-G	Zener diode	19.0V±5%, Zzt=3.0Ω, Izm=250mA, 5W	DO-214AB	1d	1a	Cmc
356B	-	SMBJ5356B	Zener diode	19V±5%, Izt=65mA, Zzt=3Ω, 5W	DO-214AA	1d	1w	Mco
356B	-	Z5SMB5356B	Zener diode	18.1..20.0V, Izt=65mA, 5W	DO-214AA	1d	1ab	Ttr
356B	-	Z5SMC5356B	Zener diode	18.05..19.95V, Izt=65mA, 5W	DO-214AB	1d	1a	Ttr
356C	-	SZ356C	Zener diode	6.2V±5%, Izt=60.5mA, Zzt=2.0Ω, 1.5W	DO-214AC	1d	1a	Eic
356I	-	SZ356I	Zener diode	6.8V±5%, Izt=55.1mA, Zzt=2.5Ω, 1.5W	DO-214AC	1d	1a	Eic
3575	-	SZ3575	Zener diode	75V±5%, Izt=5.0mA, Zzt=140Ω, 1.5W	DO-214AC	1d	1a	Eic
357B	-	1SMC5357	Zener diode	19..21V, Zzt=3Ω, Izt=65 75mA, 5W	DO-214AB	1d	1a	Pjt
357B	-	CZRC5357B-G	Zener diode	20.0V±5%, Zzt=3.0Ω, Izm=237mA, 5W	DO-214AB	1d	1a	Cmc
357B	-	SMBJ5357B	Zener diode	20V±5%, Izt=65mA, Zzt=3Ω, 5W	DO-214AA	1d	1w	Mco
357B	-	Z5SMB5357B	Zener diode	19.0..21.0V, Izt=65mA, 5W	DO-214AA	1d	1ab	Ttr
357B	-	Z5SMC5357B	Zener diode	19.0..21.00V, Izt=65mA, 5W	DO-214AB	1d	1a	Ttr
357F	-	SZ357F	Zener diode	7.5V±5%, Izt=50.0mA, Zzt=3.0Ω, 1.5W	DO-214AC	1d	1a	Eic
3582	-	SZ3582	Zener diode	82V±5%, Izt=4.6mA, Zzt=160Ω, 1.5W	DO-214AC	1d	1a	Eic
358B	-	1SMC5358	Zener diode	20.9..23.1V, Zzt=4Ω, Izt=50mA, 5W	DO-214AB	1d	1a	Pjt
358B	-	CZRC5358B-G	Zener diode	22.0V±5%, Zzt=3.5Ω, Izm=216mA, 5W	DO-214AB	1d	1a	Cmc
358B	-	SMBJ5358B	Zener diode	22V±5%, Izt=50mA, Zzt=3.5Ω, 5W	DO-214AA	1d	1w	Mco
358B	-	Z5SMB5358B	Zener diode	20.9..23.1V, Izt=50mA, 5W	DO-214AA	1d	1ab	Ttr
358B	-	Z5SMC5358B	Zener diode	20.90..23.10V, Izt=50mA, 5W	DO-214AB	1d	1a	Ttr
358C	-	SZ358C	Zener diode	8.2V±5%, Izt=45.7mA, Zzt=3.5Ω, 1.5W	DO-214AC	1d	1a	Eic
3591	-	SZ3591	Zener diode	91V±5%, Izt=4.1mA, Zzt=200Ω, 1.5W	DO-214AC	1d	1a	Eic
359B	-	1SMC5359	Zener diode	22.8..25.2V, Zzt=4Ω, Izt=50mA, 5W	DO-214AB	1d	1a	Pjt
359B	-	CZRC5359B-G	Zener diode	24.0V±5%, Zzt=3.5Ω, Izm=198mA, 5W	DO-214AB	1d	1a	Cmc
359B	-	SMBJ5359B	Zener diode	24V±5%, Izt=50mA, Zzt=3.5Ω, 5W	DO-214AA	1d	1w	Mco

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
359B	-	SZ359B	Zener diode	9.1V±5%, Izt=41.2mA, Zzt=4.0Ω, 1.5W	DO-214AC	1d	1a	Eic
359B	-	Z5SMB5359B	Zener diode	22.8..25.2V, Izt=50mA, 5W	DO-214AA	1d	1ab	Ttr
359B	-	Z5SMC5359B	Zener diode	22.80..25.20V, Izt=50mA, 5W	DO-214AB	1d	1a	Ttr
35A	-	P3500SAA	Thy-SPD	Vdrm=300V, Vs=400V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Vs
35B	-	1PMT5935B	Zener diode	27V±5%, Izt=55mA, 2.5W	DO-216AA	4d	1g	Ons
35B	-	MMHZ5235BPT	Zener diode	6.460..7.140V, Izt=5mA, Zzt=8Ω, 225mW	SOD-123	5d	1a	Chm
35B	-	SMAJ5935B	Zener diode	27V±5%, Izt=13.9mA, Zzt=23.0Ω, 1.5W	DO-214AC	1d	1a	Mco
35B0	-	SZ35B0	Zener diode	100V±5%, Izt=3.7mA, Zzt=250Ω, 1.5W	DO-214AC	1d	1a	Eic
35B1	-	SZ35B1	Zener diode	110V±5%, Izt=3.4mA, Zzt=300Ω, 1.5W	DO-214AC	1d	1a	Eic
35B2	-	SZ35B2	Zener diode	120V±5%, Izt=3.1mA, Zzt=380Ω, 1.5W	DO-214AC	1d	1a	Eic
35B3	-	SZ35B3	Zener diode	130V±5%, Izt=2.9mA, Zzt=450Ω, 1.5W	DO-214AC	1d	1a	Eic
35B5	-	SZ35B5	Zener diode	150V±5%, Izt=2.5mA, Zzt=600Ω, 1.5W	DO-214AC	1d	1a	Eic
35B6	-	SZ35B6	Zener diode	160V±5%, Izt=2.3mA, Zzt=700Ω, 1.5W	DO-214AC	1d	1a	Eic
35B8	-	SZ35B8	Zener diode	180V±5%, Izt=2.1mA, Zzt=900Ω, 1.5W	DO-214AC	1d	1a	Eic
35D0	-	SZ35D0	Zener diode	200V±5%, Izt=1.9mA, Zzt=1200Ω, 1.5W	DO-214AC	1d	1a	Eic
35S	-	MMHZ5235SPT	Zener diode	6.664..6.936V, Izt=5mA, Zzt=8Ω, 225mW	SOD-123	5d	1a	Chm
36	-	BZY55-C36	Zener diode	34.20..37.80V, Izt=5mA, Zzt=80Ω, 500mW	0805	70d	2d	Tsc
36	-	CDZ55C36	Zener diode	34.20..37.80V, Zzt=80Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
36	-	CDZ55C36S	Zener diode	34.20..37.80V, Zzt=80Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
36	-	CDZ55C36T	Zener diode	34.20..37.80V, Zzt=80Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
36	-	CHSDCFJGP	Si-diode	SBD, 60V, 3A, Vf<0.7V(3A), 200pF	SOD-123J	7d	1a	Chm
36	-	CMZ36	Zener diode	36V±5%, Izt=9mA, 2W	M-FLAT	7d	1a	Tos
36	-	CTZ55C36	Zener diode	34.20..37.80V, Izt=5mA, Zzt=80Ω, 500mW	1206	70d	2d	Ctc
36	-	CZRNC55C36-G	Zener diode	34.20..37.80V, Zt=80Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
36	-	CZRSC55C36-G	Zener diode	34.20..37.80V, Zt=80Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
36	-	HMSZ5236B	Zener diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 225mW	SOD-323	5d	1d	Hsn
36	-	HZC3.6	Zener diode	3.6V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
36	-	KDZ3.6EV	Zener diode	3.4..3.8V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
36	-	KDZ3.6V	Zener diode	3.4..3.8V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
36	-	KDZ36VV	Zener diode	34.0..38.0V, Izt=2mA, Zzt=300Ω, 100mW	VSC	7d	1a	Kec
36	-	MAZ83600H	Zener diode	36.1..34.9V, Zzt=250Ω(2mA), 150mW	SC-76	6d	1a	Pan
36	-	MAZS360	Zener diode	34..38V, Iz=2mA, 200mW	SOD-523	6d	1a	Pan
36	-	MAZY360	Zener diode	32.4..39.6V, Zzt=30Ω(5mA), 1W	NMiniP2	1d	1a	Pan
36	-	MMPZ5258SPT	Zener diode	35.28..36.72V, Izt=5mA, Zzt=95Ω, 225mW	SOD-323	5d	1a	Chm
36	-	P4SMA36	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 8.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
36	-	P6SMBJ36	TVS	Vrwm=36V, Vbr=32.4..39.6V, 11.6A, 600W(1ms)	DO-214AA	1d	1n	Lif
36	-	SMA3C36	Zener diode	36V±5%, Izt=21mA, Zzt<22Ω, 3W	DO-214AC	1d	1a	Exc
36	-	SMBG36	TVS	Vrwm=36V, Vbr=40.0..50.7V, 9.3A, 600W(1ms)	DO-215AA	5d	1a	Msc
36	-	SML4753	Zener diode	36V±5%, Izt=7mA, Zzt=50Ω, 1W	DO-214AC	1d	1k	Vs
36	-	SS3P6	Si-diode	SBR, 60V, 3A, Vf<0.78V(3A)	DO-220AA	8d	1k	Vs
36	-	TZD3.6WS	Zener diode	3.40..3.80V, Izt=5mA, Zzt=113Ω, 200mW	SOD-323	5d	1a	Ttr
36	-	TZD3.6WT	Zener diode	3.40..3.80V, Izt=5mA, Zzt=113Ω, 150mW	SOD-523	6d	1a	Ttr
36	-	TZD36WU	Zener diode	35.07..36.87V, Izt=2mA, Zzt=300Ω, 100mW	SOD-723	7d	1a	Ttr
36	-	U1ZB36	Zener diode	32.4..39.6V, Izt=9mA, 1W	3-4D1A	1d	2fa	Tos
36	-	USFZ36V	Zener diode	36V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
36	-	ZD5236BS2	Zener diode	7.5V±5%, 20mA, Zzt=6.0Ω, 500mW	SOD-323	5d	1a	Cys
36	ah	HZC36	Zener diode	36V±10%, Iz=2mA, 150mW	SOD-523	6d	1a	Ren
36	ay	CRZ36	Zener diode	32.4..39.6V, Izt=9mA, 700mW	S-FLAT	6d	1a	Tos
36-	-	MAZ83600M	Zener diode	35.1..36.9V, Zzt=250Ω(2mA), 150mW	SC-76	6d	1a	Pan
36-	-	MAZ8360GML	Zener diode	35.1..36.9V, Zzt=250Ω(2mA), 150mW	SMini2-F3	6d	1a	Pan
36-	-	MAZS3600M	Zener diode	35.1..36.9V, Iz=2mA, 200mW	SOD-523	6d	1a	Pan
36^	-	MAZ83600H	Zener diode	36.1..34.9V, Zzt=250Ω(2mA), 150mW	SC-76	6d	1a	Pan
36^	-	MAZ8360GHL	Zener diode	36.1..34.9V, Zzt=250Ω(2mA), 150mW	SMini2-F3	6d	1a	Pan
36^	-	MAZS3600H	Zener diode	36.1..37.9V, Iz=2mA, 200mW	SOD-523	6d	1a	Pan
36_	-	MAZ83600L	Zener diode	34.1..35.9V, Zzt=250Ω(2mA), 150mW	SC-76	6d	1a	Pan
36_	-	MAZ8360GLL	Zener diode	34.1..35.9V, Zzt=250Ω(2mA), 150mW	SMini2-F3	6d	1a	Pan
36_	-	MAZS3600L	Zener diode	34.1..35.9V, Iz=2mA, 200mW	SOD-523	6d	1a	Pan
36•	-	RKZ36BKG	Zener diode	34.0..38.0V, Izt=2mA, Zzt=90Ω, 200mW	URP	5d	2e	Ren
36•	-	RKZ36BKJ	Zener diode	34.0..38.0V, Izt=2mA, Zzt=90Ω, 150mW	UFP	7d	2e	Ren
36•	-	TZD3.6YWS	Zener diode	3.60..3.845V, Izt=5mA, Zzt=113Ω, 200mW	SOD-323	5d	1a	Ttr
36•	-	TZD3.6YWT	Zener diode	3.60..3.845V, Izt=5mA, Zzt=113Ω, 150mW	SOD-523	6d	1a	Ttr
36•	aj	HZU36B	Zener diode	34.0..38.0V, Izt=2mA, Zzt=90Ω, 200mW	URP	5d	1a	Ren
360B	-	1SMC5360	Zener diode	23.75..26.25V, Zzt=4Ω, Izt=50mA, 5W	DO-214AB	1d	1a	Pjt
360B	-	CZRC5360B-G	Zener diode	25.0V±5%, Zzt=4.0Ω, Izm=190mA, 5W	DO-214AB	1d	1a	Cmc
360B	-	SMBJ5360B	Zener diode	25V±5%, Izt=50mA, Zzt=4Ω, 5W	DO-214AA	1d	1w	Mco
360B	-	Z5SMB5360B	Zener diode	23.8..26.3V, Izt=50mA, 5W	DO-214AA	1d	1ab	Ttr
360B	-	Z5SMC5360B	Zener diode	23.75..26.25V, Izt=50mA, 5W	DO-214AB	1d	1a	Ttr
361	-	HZU36-1L	Zener diode	34.2..35.7V, Izt=0.5mA, Zzt=300Ω, 150mW	URP	5d	1a	Ren
361B	-	1SMC5361	Zener diode	25.65..28.35V, Zzt=5Ω, Izt=50mA, 5W	DO-214AB	1d	1a	Pjt
361B	-	CZRC5361B-G	Zener diode	27.0V±5%, Zzt=5.0Ω, Izm=176mA, 5W	DO-214AB	1d	1a	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
361B	-	SMBJ5361B	Zener diode	27V±5%, Izt=50mA, Zzt=5Ω, 5W	DO-214AA	1d	1w	Mco
361B	-	Z5SMB5361B	Zener diode	25.7..28.4V, Izt=50mA, 5W	DO-214AA	1d	1ab	Ttr
361B	-	Z5SMC5361B	Zener diode	25.65..28.35V, Izt=50mA, 5W	DO-214AB	1d	1a	Ttr
362	-	HZU36-2L	Zener diode	35.3..36.8V, Izt=0.5mA, Zzt=300Ω, 150mW	URP	5d	1a	Ren
362B	-	1SMC5362	Zener diode	26.6..29.4V, Zzt=6Ω, Izt=50mA, 5W	DO-214AB	1d	1a	Pjt
362B	-	CZRC5362B-G	Zener diode	28.0V±5%, Zzt=6.0Ω, Izm=170mA, 5W	DO-214AB	1d	1a	Cmc
362B	-	SMBJ5362B	Zener diode	28V±5%, Izt=50mA, Zzt=6Ω, 5W	DO-214AA	1d	1w	Mco
362B	-	Z5SMB5362B	Zener diode	26.6..29.4V, Izt=50mA, 5W	DO-214AA	1d	1ab	Ttr
362B	-	Z5SMC5362B	Zener diode	26.60..29.40V, Izt=50mA, 5W	DO-214AB	1d	1a	Ttr
363	-	HZU36-3L	Zener diode	36.4..38V, Izt=0.5mA, Zzt=300Ω, 150mW	URP	5d	1a	Ren
363B	-	1SMC5363	Zener diode	28.5..31.5V, Zzt=8Ω, Izt=40mA, 5W	DO-214AB	1d	1a	Pjt
363B	-	CZRC5363B-G	Zener diode	30.0V±5%, Zzt=8.0Ω, Izm=158mA, 5W	DO-214AB	1d	1a	Cmc
363B	-	SMBJ5363B	Zener diode	30V±5%, Izt=40mA, Zzt=8Ω, 5W	DO-214AA	1d	1w	Mco
363B	-	Z5SMB5363B	Zener diode	28.5..31.5V, Izt=40mA, 5W	DO-214AA	1d	1ab	Ttr
363B	-	Z5SMC5363B	Zener diode	28.50..31.50V, Izt=40mA, 5W	DO-214AB	1d	1a	Ttr
364B	-	1SMC5364	Zener diode	31.35..34.65V, Zzt=10Ω, Izt=40mA, 5W	DO-214AB	1d	1a	Pjt
364B	-	CZRC5364B-G	Zener diode	33.0V±5%, Zzt=10.0Ω, Izm=144mA, 5W	DO-214AB	1d	1a	Cmc
364B	-	SMBJ5364B	Zener diode	33V±5%, Izt=40mA, Zzt=10Ω, 5W	DO-214AA	1d	1w	Mco
364B	-	Z5SMB5364B	Zener diode	31.4..34.7V, Izt=40mA, 5W	DO-214AA	1d	1ab	Ttr
364B	-	Z5SMC5364B	Zener diode	31.35..34.65V, Izt=40mA, 5W	DO-214AB	1d	1a	Ttr
365B	-	1SMC5365	Zener diode	34.2..37.8V, Zzt=11Ω, Izt=30mA, 5W	DO-214AB	1d	1a	Pjt
365B	-	CZRC5365B-G	Zener diode	36.0V±5%, Zzt=11.0Ω, Izm=132mA, 5W	DO-214AB	1d	1a	Cmc
365B	-	SMBJ5365B	Zener diode	36V±5%, Izt=30mA, Zzt=11Ω, 5W	DO-214AA	1d	1w	Mco
365B	-	Z5SMB5365B	Zener diode	34.2..37.8V, Izt=30mA, 5W	DO-214AA	1d	1ab	Ttr
365B	-	Z5SMC5365B	Zener diode	34.20..37.80V, Izt=30mA, 5W	DO-214AB	1d	1a	Ttr
366B	-	1SMC5366	Zener diode	37.05..40.95V, Zzt=14Ω, Izt=30mA, 5W	DO-214AB	1d	1a	Pjt
366B	-	CZRC5366B-G	Zener diode	39.0V±5%, Zzt=14.0Ω, Izm=122mA, 5W	DO-214AB	1d	1a	Cmc
366B	-	SMBJ5366B	Zener diode	39V±5%, Izt=30mA, Zzt=14Ω, 5W	DO-214AA	1d	1w	Mco
366B	-	Z5SMB5366B	Zener diode	37.1..41.0V, Izt=30mA, 5W	DO-214AA	1d	1ab	Ttr
366B	-	Z5SMC5366B	Zener diode	37.05..40.95V, Izt=30mA, 5W	DO-214AB	1d	1a	Ttr
367B	-	1SMC5367	Zener diode	40.85..45.15V, Zzt=20Ω, Izt=30mA, 5W	DO-214AB	1d	1a	Pjt
367B	-	CZRC5367B-G	Zener diode	43.0V±5%, Zzt=20.0Ω, Izm=110mA, 5W	DO-214AB	1d	1a	Cmc
367B	-	SMBJ5367B	Zener diode	43V±5%, Izt=30mA, Zzt=20Ω, 5W	DO-214AA	1d	1w	Mco
367B	-	Z5SMB5367B	Zener diode	40.9..45.2V, Izt=30mA, 5W	DO-214AA	1d	1ab	Ttr
367B	-	Z5SMC5367B	Zener diode	40.85..45.15V, Izt=30mA, 5W	DO-214AB	1d	1a	Ttr
368B	-	1SMC5368	Zener diode	44.65..49.35V, Zzt=25Ω, Izt=25mA, 5W	DO-214AB	1d	1a	Pjt
368B	-	CZRC5368B-G	Zener diode	47.0V±5%, Zzt=25.0Ω, Izm=100mA, 5W	DO-214AB	1d	1a	Cmc
368B	-	SMBJ5368B	Zener diode	47V±5%, Izt=25mA, Zzt=25Ω, 5W	DO-214AA	1d	1w	Mco
368B	-	Z5SMB5368B	Zener diode	44.7..49.4V, Izt=25mA, 5W	DO-214AA	1d	1ab	Ttr
368B	-	Z5SMC5368B	Zener diode	44.65..49.35V, Izt=25mA, 5W	DO-214AB	1d	1a	Ttr
369B	-	1SMC5369	Zener diode	48.45..53.55V, Zzt=27Ω, Izt=25mA, 5W	DO-214AB	1d	1a	Pjt
369B	-	CZRC5369B-G	Zener diode	51.0V±5%, Zzt=27.0Ω, Izm=93mA, 5W	DO-214AB	1d	1a	Cmc
369B	-	SMBJ5369B	Zener diode	51V±5%, Izt=25mA, Zzt=27Ω, 5W	DO-214AA	1d	1w	Mco
369B	-	Z5SMB5369B	Zener diode	48.5..53.6V, Izt=25mA, 5W	DO-214AA	1d	1ab	Ttr
369B	-	Z5SMC5369B	Zener diode	48.45..53.55V, Izt=25mA, 5W	DO-214AB	1d	1a	Ttr
36A	-	1.5SMC36A	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, Ipp=30A, 1500W(1ms)	DO-214AB	1d	1b	Mde
36A	-	1.5SMC36A	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, Ipp=30A, 1500W(1ms)	403	3d	2t	Ons
36A	-	1.5SMC36A	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, Ipp=30A, 1500W(1ms)	DO-214AB	1d	1k	Vs
36A	-	1.5SMC36A	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, Ipp=30A, 1500W(1ms)	DO-214AB	1d	2s	Lif
36A	-	1SMC36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, 25.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
36A	-	MMF36A	TVS	Vrwm=36V, Vbr=40.0..46.0V, Ipp=3.4A, 200W(1ms)	SOD-123FL	7d	2m	Sst
36A	-	P4SMA36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
36A	-	P4SMA36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 400W(1ms)	DO-214AC	1d	1k	Vs
36A	-	P6SMB36A	TVS	Vrwm=36V, Vbr=34.2..37.8V, 12A, 600W(1ms)	403A	3d	1s	Ons
36A	-	P6SMB36A	TVS	Vrwm=36V, Vbr=34.2..37.8V, 12A, 600W(1ms)	DO-214AA	1d	1k	Vs
36A	-	P6SMBJ36A	TVS	Vrwm=36V, Vbr=32.4..39.6V, 12A, 600W(1ms)	DO-214AA	1d	1n	Lif
36A	-	RKZ36AKU	Zener diode	32.14..33.79V, Izt=5mA, Zzt=90Ω, 500mW	TURP-FM	7d	1a	Ren
36A	-	SMAJ36A	TVS	Vrwm=36V, Vbr=40.0..44.2V, 6.9A, 400W(1ms)	DO-214AC	1d	1a	Sus
36A	-	SMAJP4KE36A	TVS	Vrwm=30.80V, Vbr=34.20..37.80V, Ipp=8.2A, 400W(1ms)	DO-214AC	1d	1a	Mco
36A	-	SMBG36A	TVS	Vrwm=36V, Vbr=40.0..46.0V, 10.3A, 600W(1ms)	DO-215AA	5d	1a	Msc
36A	-	SMBJ36A	TVS	Vrwm=36V, Vbr=40.0..46.0V, 10.3A, 600W(1ms)	DO-214AA	1d	1a	Sus
36A	-	SMBJP6KE36A	TVS	Vrwm=30.80V, Vbr=34.20..37.80V, Ipp=12.2A, 600W(1ms)	DO-214AA	1d	1a	Mco
36A	-	SMCJ1.5KE36A	TVS	Vrwm=30.80V, Vbr=34.20..37.80V, Ipp=30.5A, 1500W(1ms)	DO-214AB	1d	1a	Mco
36A	-	SMCJ36A	TVS	Vrwm=36V, Vbr= 40..46V, 23.3A, 1500W(1ms)	DO-214AB	1d	1k	Sus
36A	-	SMF36A	TVS	Vbr=40..44.2V, Vrwm=36V, Ipp=3.4A, 200W(1ms)	SOD-123FL	7d	1a	Mco
36A	-	SZP6SMB36A	TVS	Vrwm=36V, Vbr=34.2..37.8V, 12A, 600W(1ms)	403A	3d	1s	Ons
36A	-	TVP04A360A-G	TVS	Vbr=34.20..37.80V, Vrwm=30.8V, Ipp=8.02A, 400W(1ms)	DO-214AC	1d	2o	Cmc
36A	-	TVP06B36A-G	TVS	Vrwm=30.8V, Vbr=34.20..37.80V, Ipp=12.02A, 600W(1ms)	DO-214AA	1d	2o	Cmc
36A	-	UMA36A	TVS	Vrwm=36V, Vbr=40.0..58.1V, 8.6A, 500W(1ms)	UltraMite	14d	1v	Msc
36AP	-	15TPSMC36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 30.5A, 1500W(1ms)	DO-214AB	1d	1p	Lif

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
36AP	-	4TPSMA36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.2A, 400W(1ms)	DO-214AC	1d	1p	Lif
36AP	-	6TPSMB36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 12.2A, 600W(1ms)	DO-214AA	1d	1p	Lif
36B	-	1PMT5936B	Zener diode	30V±5%, Izt=50mA, 2.5W	DO-216AA	4d	1g	Ons
36B	-	1SMB3EZ36	Zener diode	36V±5%, Zzt=25Ω, Izt=21.0mA, 3W	DO-214AA	1d	1a	Pjt
36B	-	HZF36BP	Zener diode	36V±5%, Iz=10mA, 900mW	LRP	1d	2f	Ren
36B	-	MMHZ5236BPT	Zener diode	7.125..7.875V, Izt=5mA, Zzt=7Ω, 225mW	SOD-123	5d	1a	Chm
36B	-	PTZ36B	Zener diode	36V±10%, Izt=10mA, 1W	DO-214AC	1d	1a	Rhm
36B	-	RKZ36BKU	Zener diode	32.79..34.49V, Izt=5mA, Zzt=90Ω, 500mW	TURP-FM	7d	1a	Ren
36B	-	SMAJ5936B	Zener diode	30V±5%, Izt=12.5mA, Zzt=28.0Ω, 1.5W	DO-214AC	1d	1a	Mco
36B	-	Z3SMB36B	Zener diode	34.20..37.80V, Izt=21mA, Zzt=22Ω, 3W	DO-214AA	1d	1a	Ttr
36C	-	1.5SMC36CA	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, Ipp=30A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
36C	-	1.5SMC36CA	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, Ipp=30A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
36C	-	1.5SMC36CA	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, Ipp=30A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
36C	-	HZF36CP	Zener diode	36V±10%, Iz=10mA, 900mW	LRP	1d	2f	Ren
36C	-	P4SMA36C	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 8.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
36C	-	P4SMA36CA	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
36C	-	P6SMB36CA	TVS	Vrwm=36V, Vbr=34.2..37.8V, 12A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
36C	-	P6SMBJ36C	TVS	Vrwm=36V, Vbr=32.4..39.6V, 11.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
36C	-	RKZ36CKU	Zener diode	33.40..35.13V, Izt=5mA, Zzt=90Ω, 500mW	TURP-FM	7d	1a	Ren
36C	-	SMAJP4KE36CA	TVS	Vrwm=30.80V, Vbr=34.20..37.80V, Ipp=8.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
36C	-	SMBG36C	TVS	Vrwm=36V, Vbr=40.0..50.7V, 9.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
36C	-	SMBJP6KE36CA	TVS	Vrwm=30.80V, Vbr=34.20..37.80V, Ipp=12.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
36C	-	SMCJ1.5KE36CA	TVS	Vrwm=30.80V, Vbr=34.20..37.80V, Ipp=30.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
36C	-	TVP04A360CA-G	TVS	Vbr=34.20..37.80V, Vrwm=30.8V, Ipp=8.02A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
36C	-	TVP06B36ACA-G	TVS	Vrwm=30.8V, Vbr=34.20..37.80V, Ipp=12.02A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
36CA	-	1SMC36CA	TVS	Vbr=40.0..44.2V, Vrwm=36V, 25.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
36CA	-	MMF36CA	TVS	Vrwm=36V, Vbr=40.0..46.0V, Ipp=3.4A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
36CA	-	P4SMA36CA	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
36CA	-	P6SMB36CA	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 12.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
36CA	-	P6SMBJ36CA	TVS	Vrwm=36V, Vbr=32.4..39.6V, 12A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
36CA	-	SMAJ36CA	TVS	Vrwm=36V, Vbr=40.0..44.2V, 6.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
36CA	-	SMBG36CA	TVS	Vrwm=36V, Vbr=40..46V, 10.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
36CA	-	SMBJ36CA	TVS	Vrwm=36V, Vbr=40..46V, 10.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
36CA	-	SMCJ36CA	TVS	Vrwm=36V, Vbr= 40..46V, 23.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
36CA	-	SMF36CA	TVS	Vbr=40..44.2V, Vrwm=36V, Ipp=3.4A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
36CA	-	UMA36CA	TVS	Vrwm=36V, Vbr=40.0..58.1V, 8.6A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
36CP	-	15TPSMC36CA	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 30.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
36CP	-	4TPSMA36CA	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1p	Lif
36CP	-	6TPSMB36CA	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 12.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
36D	-	RKZ36DKU	Zener diode	34.01..35.77V, Izt=5mA, Zzt=90Ω, 500mW	TURP-FM	7d	1a	Ren
36G	-	ZD36G-CA2	Zener diode	36V±5%, Zzt=300Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
36G	-	ZD36G-CB2	Zener diode	36V±5%, Zzt=300Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
36L	-	ZD36L-CA2	Zener diode	36V±5%, Zzt=300Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
36L	-	ZD36L-CB2	Zener diode	36V±5%, Zzt=300Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
36P	-	BZD27C36P	Zener diode	34.20..37.80V, Zzt=40Ω, Izt=10mA, 800mW	SOD-123FL	7d	1a	Pjt
36P	-	MFPZ36	Zener diode	34.2..37.8V, Izt=10mA, Zzt=40Ω, 800mW	SOD-123FL	7d	1a	Ttr
36S	-	MMHZ5236SPT	Zener diode	7.350..7.650V, Izt=5mA, Zzt=7Ω, 225mW	SOD-123	5d	1a	Chm
36V	-	SMA36	TVS	Vbr=40..48.6V, Vrwm=36.0V, 4.7A, 300W(1ms)	DO-214AC	1d	1a	Mic
36V	-	SMB36	TVS	Vbr=40..48.9V, Vrwm=36V, 9.3A, 600W(1ms)	DO-214AA	1d	1a	Mic
36V	-	SMC36	TVS	Vbr=40..48.9V, Vrwm=36V, 23.3A, 1500W(1ms)	DO-214AB	1d	1a	Mic
36VA	-	SMA36A	TVS	Vbr=40..44.2V, Vrwm=36.0V, 5.2A, 300W(1ms)	DO-214AC	1d	1a	Mic
36VA	-	SMB36A	TVS	Vbr=40..44.2V, Vrwm=36V, 10.3A, 600W(1ms)	DO-214AA	1d	1a	Mic
36VA	-	SMC36A	TVS	Vbr=40..44.2V, Vrwm=36V, 25.8A, 1500W(1ms),	DO-214AB	1d	1a	Mic
36VB	-	BZT52B36	Zener diode	35.28..36.72V, Izt=2mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Tsc
36VB	-	MMSZ36VBW	Zener diode	35.28..36.72V, Izt=2mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Tac
36VC	-	SMA36C	TVS	Vbr=40..48.6V, Vrwm=36.0V, 4.7A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
36VC	-	SMB36C	TVS	Vbr=40..48.9V, Vrwm=36V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
36VC	-	SMC36C	TVS	Vbr=40..48.9V, Vrwm=36V, 23.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
36VCA	-	SMA36CA	TVS	Vbr=40..44.2V, Vrwm=36.0V, 5.2A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
36VCA	-	SMB36CA	TVS	Vbr=40..44.2V, Vrwm=36V, 10.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
36VCA	-	SMC36CA	TVS	Vbr=40..44.2V, Vrwm=36V, 25.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
36VZ	-	BZT52C36	Zener diode	34.20..37.80V, Izt=2mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Tsc
36VZ	-	MMSZ36VCW	Zener diode	34.20..37.80V, Izt=2mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Tac
36VZ	-	TCMMSZ36V	Zener diode	36V±5%, Izt=5mA, Zzt=84Ω, 500mW	SOD-123FL	7d	1a	Tac
36VZ	-	ZGFM0536C-MH	Zener diode	34.20..37.8V, Izt=5mA, Zzt=84Ω, 500mW	SOD-123	5d	1a	Pic
36W	-	SD36	TVS	Vrwm=36.0V, Vbr=32.5..45V, Ipp=5A, 500WW(1ms)	SOD-323	5d	1a	Ldt
37	-	HMSZ5237B	Zener diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 225mW	SOD-323	5d	1d	Hsn
37	-	ZD5237BS2	Zener diode	8.2V±5%, 20mA, Zzt=8.0Ω, 500mW	SOD-323	5d	1a	Cys
370B	-	1SMC5370	Zener diode	56V±10%, Zzt=35Ω, Izt=20mA, 5W	DO-214AB	1d	1a	Pjt
370B	-	CZRC5370B-G	Zener diode	56.0V±5%, Zzt=35.0Ω, Izm=86mA, 5W	DO-214AB	1d	1a	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
370B	-	Z5SMB5370B	Zener diode	53.2..58.8V, Izt=20mA, 5W	DO-214AA	1d	1ab	Ttr
370B	-	Z5SMC5370B	Zener diode	53.20..58.80V, Izt=20mA, 5W	DO-214AB	1d	1a	Ttr
371B	-	1SMC5371	Zener diode	60V±10%, Zzt=40Ω, Izt=20mA, 5W	DO-214AB	1d	1a	Pjt
371B	-	CZRC5371B-G	Zener diode	60.0V±5%, Zzt=40.0Ω, Izm=79mA, 5W	DO-214AB	1d	1a	Cmc
371B	-	Z5SMB5371B	Zener diode	57.0..63.0V, Izt=20mA, 5W	DO-214AA	1d	1ab	Ttr
371B	-	Z5SMC5371B	Zener diode	57.0..63.0V, Izt=20mA, 5W	DO-214AB	1d	1a	Ttr
372B	-	1SMC5372	Zener diode	62V±10%, Zzt=42Ω, Izt=20mA, 5W	DO-214AB	1d	1a	Pjt
372B	-	CZRC5372B-G	Zener diode	62.0V±5%, Zzt=42.0Ω, Izm=76mA, 5W	DO-214AB	1d	1a	Cmc
372B	-	Z5SMB5372B	Zener diode	58.9..65.1V, Izt=20mA, 5W	DO-214AA	1d	1ab	Ttr
372B	-	Z5SMC5372B	Zener diode	58.90..65.10V, Izt=20mA, 5W	DO-214AB	1d	1a	Ttr
373B	-	1SMC5373	Zener diode	68V±10%, Zzt=44Ω, Izt=20mA, 5W	DO-214AB	1d	1a	Pjt
373B	-	CZRC5373B-G	Zener diode	68.0V±5%, Zzt=44.0Ω, Izm=70mA, 5W	DO-214AB	1d	1a	Cmc
373B	-	Z5SMB5373B	Zener diode	64.6..71.4V, Izt=20mA, 5W	DO-214AA	1d	1ab	Ttr
373B	-	Z5SMC5373B	Zener diode	64.60..71.40V, Izt=20mA, 5W	DO-214AB	1d	1a	Ttr
374B	-	1SMC5374	Zener diode	75V±10%, Zzt=45Ω, Izt=20mA, 5W	DO-214AB	1d	1a	Pjt
374B	-	CZRC5374B-G	Zener diode	75.0V±5%, Zzt=45.0Ω, Izm=63mA, 5W	DO-214AB	1d	1a	Cmc
374B	-	Z5SMB5374B	Zener diode	71.3..78.8V, Izt=20mA, 5W	DO-214AA	1d	1ab	Ttr
374B	-	Z5SMC5374B	Zener diode	71.25..78.75V, Izt=20mA, 5W	DO-214AB	1d	1a	Ttr
375B	-	1SMC5375	Zener diode	82V±10%, Zzt=65Ω, Izt=15mA, 5W	DO-214AB	1d	1a	Pjt
375B	-	CZRC5375B-G	Zener diode	82.0V±5%, Zzt=65.0Ω, Izm=58mA, 5W	DO-214AB	1d	1a	Cmc
375B	-	Z5SMB5375B	Zener diode	77.9..86.1V, Izt=15mA, 5W	DO-214AA	1d	1ab	Ttr
375B	-	Z5SMC5375B	Zener diode	77.90..86.10V, Izt=15mA, 5W	DO-214AB	1d	1a	Ttr
376B	-	1SMC5376	Zener diode	87V±10%, Zzt=75Ω, Izt=15mA, 5W	DO-214AB	1d	1a	Pjt
376B	-	CZRC5376B-G	Zener diode	87.0V±5%, Zzt=75.0Ω, Izm=54mA, 5W	DO-214AB	1d	1a	Cmc
376B	-	Z5SMB5376B	Zener diode	82.7..91.4V, Izt=15mA, 5W	DO-214AA	1d	1ab	Ttr
376B	-	Z5SMC5376B	Zener diode	82.65..91.35V, Izt=15mA, 5W	DO-214AB	1d	1a	Ttr
377B	-	1SMC5377	Zener diode	91V±10%, Zzt=75Ω, Izt=15mA, 5W	DO-214AB	1d	1a	Pjt
377B	-	CZRC5377B-G	Zener diode	91.0V±5%, Zzt=75.0Ω, Izm=52mA, 5W	DO-214AB	1d	1a	Cmc
377B	-	Z5SMB5377B	Zener diode	86.5..95.6V, Izt=15mA, 5W	DO-214AA	1d	1ab	Ttr
377B	-	Z5SMC5377B	Zener diode	86.45..95.55V, Izt=15mA, 5W	DO-214AB	1d	1a	Ttr
378B	-	1SMC5378	Zener diode	100V±10%, Zzt=90Ω, Izt=12mA, 5W	DO-214AB	1d	1a	Pjt
378B	-	CZRC5378B-G	Zener diode	100.0V±5%, Zzt=90.0Ω, Izm=47mA, 5W	DO-214AB	1d	1a	Cmc
378B	-	Z5SMB5378B	Zener diode	95.0..105.0V, Izt=12mA, 5W	DO-214AA	1d	1ab	Ttr
378B	-	Z5SMC5378B	Zener diode	95.0..105.0V, Izt=12mA, 5W	DO-214AB	1d	1a	Ttr
379B	-	1SMC5379	Zener diode	110V±10%, Zzt=125Ω, Izt=12mA, 5W	DO-214AB	1d	1a	Pjt
379B	-	CZRC5379B-G	Zener diode	110.0V±5%, Zzt=125.0Ω, Izm= 43mA, 5W	DO-214AB	1d	1a	Cmc
379B	-	Z5SMB5379B	Zener diode	104.5..115.5V, Izt=12mA, 5W	DO-214AA	1d	1ab	Ttr
37B	-	MMHZ5237BPT	Zener diode	7.790..8.610V, Izt=5mA, Zzt=7Ω, 225mW	SOD-123	5d	1a	Chm
37B	-	SMAJ5937B	Zener diode	33V±5%, Izt=11.4mA, Zzt=33.0Ω, 1.5W	DO-214AC	1d	1a	Mco
37S	-	MMHZ5237SPT	Zener diode	8.036..8.364V, Izt=5mA, Zzt=7Ω, 225mW	SOD-123	5d	1a	Chm
37ZD	-	BYD37D	Si-diode	Rectifier, Contr.avalanche, 200V, 1A, 250ns, 20pF	1206	14d	1v	Zow
37ZG	-	BYD37G	Si-diode	Rectifier, Contr.avalanche, 400V, 1A, 250ns, 20pF	1206	14d	1v	Zow
37ZJ	-	BYD37J	Si-diode	Rectifier, Contr.avalanche, 600V, 1A, 250ns, 20pF	1206	14d	1v	Zow
37ZK	-	BYD37K	Si-diode	Rectifier, Contr.avalanche, 800V, 1A, 300ns, 20pF	1206	14d	1v	Zow
37ZM	-	BYD37M	Si-diode	Rectifier, Contr.avalanche, 1000V, 1A, 300ns, 20pF	1206	14d	1v	Zow
38	-	HMSZ5238B	Zener diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 225mW	SOD-323	5d	1d	Hsn
38	-	ZD5238BS2	Zener diode	8.7V±5%, 20mA, Zzt=8.0Ω, 500mW	SOD-323	5d	1a	Cys
380A	-	TVP04A381A-G	TVS	Vbr=361.0..399.0V, Vrwm=324.9V, Ipp=0.76A, 400W(1ms)	DO-214AC	1d	2o	Cmc
380A	-	TVP06B381A-G	TVS	Vrwm=324.9V, Vbr=361.0..399.0V, Ipp=1.14A, 600W(1ms)	DO-214AA	1d	2o	Cmc
380B	-	1SMC5380	Zener diode	120V±10%, Zzt=170Ω, Izt=10mA, 5W	DO-214AB	1d	1a	Pjt
380B	-	CZRC5380B-G	Zener diode	120.0V±5%, Zzt=170.0Ω, Izm=39mA, 5W	DO-214AB	1d	1a	Cmc
380B	-	Z5SMB5380B	Zener diode	114.0..126.0V, Izt=10mA, 5W	DO-214AA	1d	1ab	Ttr
380C	-	TVP04A381CA-G	TVS	Vbr=361.0..399.0V, Vrwm=324.9V, Ipp=0.76A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
380C	-	TVP06B381ACA-G	TVS	Vrwm=324.9V, Vbr=361.0..399.0V, Ipp=1.14A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
381B	-	1SMC5381	Zener diode	130V±10%, Zzt=190Ω, Izt=10mA, 5W	DO-214AB	1d	1a	Pjt
381B	-	CZRC5381B-G	Zener diode	130.0V±5%, Zzt= 190.0Ω, Izm=36mA, 5W	DO-214AB	1d	1a	Cmc
381B	-	Z5SMB5381B	Zener diode	123.5..136.5V, Izt=10mA, 5W	DO-214AA	1d	1ab	Ttr
382B	-	1SMC5382	Zener diode	140V±10%, Zzt=230Ω, Izt=8mA, 5W	DO-214AB	1d	1a	Pjt
382B	-	CZRC5382B-G	Zener diode	140.0V±5%, Zzt=230.0Ω, Izm=34mA, 5W	DO-214AB	1d	1a	Cmc
382B	-	Z5SMB5382B	Zener diode	133.0..147.0V, Izt=8.0mA, 5W	DO-214AA	1d	1ab	Ttr
383B	-	1SMC5383	Zener diode	150V±10%, Zzt=330Ω, Izt=8mA, 5W	DO-214AB	1d	1a	Pjt
383B	-	CZRC5383B-G	Zener diode	150.0V±5%, Zzt=330.0Ω, Izm=31mA, 5W	DO-214AB	1d	1a	Cmc
383B	-	Z5SMB5383B	Zener diode	142.5..157.5V, Izt=8.0mA, 5W	DO-214AA	1d	1ab	Ttr
384B	-	1SMC5384	Zener diode	160V±10%, Zzt=350Ω, Izt=8mA, 5W	DO-214AB	1d	1a	Pjt
384B	-	CZRC5384B-G	Zener diode	160.0V±5%, Zzt=335.0Ω, Izm=29mA, 5W	DO-214AB	1d	1a	Cmc
384B	-	Z5SMB5384B	Zener diode	152.0..168.0V, Izt=8.0mA, 5W	DO-214AA	1d	1ab	Ttr
385B	-	1SMC5385	Zener diode	170V±10%, Zzt=380Ω, Izt=8mA, 5W	DO-214AB	1d	1a	Pjt
385B	-	CZRC5385B-G	Zener diode	170.0V±5%, Zzt=380.0Ω, Izm=28mA, 5W	DO-214AB	1d	1a	Cmc
385B	-	Z5SMB5385B	Zener diode	161.5..178.5V, Izt=8.0mA, 5W	DO-214AA	1d	1ab	Ttr
386B	-	1SMC5386	Zener diode	180V±10%, Zzt=430Ω, Izt=5mA, 5W	DO-214AB	1d	1a	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
386B	-	CZRC5386B-G	Zener diode	180.0V±5%, Zzt=430.0Ω, Izm=26mA, 5W	DO-214AB	1d	1a	Cmc
386B	-	Z5SMB5386B	Zener diode	171.0..189.0V, Izt=5.0mA, 5W	DO-214AA	1d	1ab	Ttr
387B	-	1SMC5387	Zener diode	190V±10%, Zzt=450Ω, Izt=5mA, 5W	DO-214AB	1d	1a	Pjt
387B	-	CZRC5387B-G	Zener diode	190.0V±5%, Zzt=450.0Ω, Izm=25mA, 5W	DO-214AB	1d	1a	Cmc
387B	-	Z5SMB5387B	Zener diode	180.5..199.5V, Izt=5.0mA, 5W	DO-214AA	1d	1ab	Ttr
388B	-	1SMC5388	Zener diode	200V±10%, Zzt=480Ω, Izt=5mA, 5W	DO-214AB	1d	1a	Pjt
388B	-	CZRC5388B-G	Zener diode	200.0V±5% , Zzt=480.0Ω, Izm=23mA, 5W	DO-214AB	1d	1a	Cmc
388B	-	Z5SMB5388B	Zener diode	190.0..210.0V, Izt=5.0mA, 5W	DO-214AA	1d	1ab	Ttr
38B	-	MMHZ5238BPT	Zener diode	8.265..9.135V, Izt=5mA, Zzt=7Ω, 225mW	SOD-123	5d	1a	Chm
38B	-	SMAJ5938B	Zener diode	36V±5%, Izt=10.4mA, Zzt=38.0Ω, 1.5W	DO-214AC	1d	1a	Mco
38S	-	MMHZ5238SPT	Zener diode	8.526..8.874V, Izt=5mA, Zzt=7Ω, 225mW	SOD-123	5d	1a	Chm
39	-	CDZ55C39	Zener diode	37.05..40.95V, Zzt=90Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
39	-	CDZ55C39S	Zener diode	37.05..40.95V, Zzt=90Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
39	-	CDZ55C39T	Zener diode	37.05..40.95V, Zzt=90Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
39	-	CMZ39	Zener diode	39V±5%, Izt=8mA, 2W	M-FLAT	7d	1a	Tos
39	-	CZRNC55C39-G	Zener diode	37.05..40.95V, Zt=90Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
39	-	HMSZ5239B	Zener diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 225mW	SOD-323	5d	1d	Hsn
39	-	HZC3.9	Zener diode	3.9V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
39	-	KDZ3.9EV	Zener diode	3.7..4.1V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
39	-	KDZ3.9V	Zener diode	3.7..4.1V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
39	-	MAZ83900H	Zener diode	39..41V, Zzt=300Ω(2mA), 150mW	SC-76	6d	1a	Pan
39	-	MAZS390	Zener diode	37V..41V, Iz=2mA, 200mW	SOD-523	6d	1a	Pan
39	-	MAZY390	Zener diode	35.1..42.9V, Zzt=65Ω(5mA), 1W	NMiniP2	1d	1a	Pan
39	-	MMPZ5259SPT	Zener diode	38.22..39.78V, Izt=5mA, Zzt=130Ω, 225mW	SOD-323	5d	1a	Chm
39	-	P4SMA39	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 7.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
39	-	P6SMBJ39	TVS	Vrwm=39V, Vbr=35.1..42.9V, 10.5A, 600W(1ms)	DO-214AA	1d	1n	Lif
39	-	SMA3C39	Zener diode	39V±5%, Izt=19mA, Zzt<28Ω, 3W	DO-214AC	1d	1a	Exc
39	-	SML4754	Zener diode	39V±5%, Izt=6.5mA, Zzt=60Ω, 1W	DO-214AC	1d	1k	Vs
39	-	TZD3.9WS	Zener diode	3.70..4.10V, Izt=5mA, Zzt=130Ω, 200mW	SOD-323	5d	1a	Ttr
39	-	TZD3.9WT	Zener diode	3.70..4.10V, Izt=5mA, Zzt=130Ω, 150mW	SOD-523	6d	1a	Ttr
39	-	ZD5239BS2	Zener diode	9.1V±5%, 20mA, Zzt=10Ω, 500mW	SOD-323	5d	1a	Cys
39	ay	CRZ39	Zener diode	35.1..42.9V, Izt=8mA, 700mW	S-FLAT	6d	1a	Tos
39-	-	MAZ83900M	Zener diode	38..40V, Zzt=300Ω(2mA), 150mW	SC-76	6d	1a	Pan
39-	-	MAZ8390GML	Zener diode	38..40V, Zzt=300Ω(2mA), 150mW	SMini2-F3	6d	1a	Pan
39-	-	MAZS3900M	Zener diode	38..40V, Iz=2mA, 200mW	SOD-523	6d	1a	Pan
39^	-	MAZ83900H	Zener diode	39..41V, Zzt=300Ω(2mA), 150mW	SC-76	6d	1a	Pan
39^	-	MAZ8390GHL	Zener diode	39..41V, Zzt=300Ω(2mA), 150mW	SMini2-F3	6d	1a	Pan
39^	-	MAZS3900H	Zener diode	39..40V, Iz=2mA, 200mW	SOD-523	6d	1a	Pan
39_	-	MAZ83900L	Zener diode	37.1..39V, Zzt=300Ω(2mA), 150mW	SC-76	6d	1a	Pan
39_	-	MAZ8390GLL	Zener diode	37.1..39V, Zzt=300Ω(2mA), 150mW	SMini2-F3	6d	1a	Pan
39_	-	MAZS3900L	Zener diode	37.1..39V, Iz=2mA, 200mW	SOD-523	6d	1a	Pan
39•	-	TZD3.9YWS	Zener diode	3.89..4.16V, Izt=5mA, Zzt=130Ω, 200mW	SOD-323	5d	1a	Ttr
39•	-	TZD3.9YWT	Zener diode	3.89..4.16V, Izt=5mA, Zzt=130Ω, 150mW	SOD-523	6d	1a	Ttr
390	-	U1ZB390	Zener diode	351..429V, Izt=0.5mA, 1W	3-4D1A	1d	2fa	Tos
39A	-	1.5SMC39A	TVS	Vrwm=33.3V, Vbr=37.1..41V, Ipp=28A, 1500W(1ms)	DO-214AB	1d	2s	Lif
39A	-	1.5SMC39A	TVS	Vrwm=33.3V, Vbr=37.1..41V, Ipp=28A, 1500W(1ms)	DO-214AB	1d	1k	Vs
39A	-	1.5SMC39A	TVS	Vrwm=33.3V, Vbr=37.1..41V, Ipp=28A, 1500W(1ms)	403	3d	2t	Ons
39A	-	1.5SMC39A	TVS	Vrwm=33.3V, Vbr=37.1..41V, Ipp=28A, 1500W(1ms)	DO-214AB	1d	1b	Mde
39A	-	P4SMA39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 400W(1ms)	DO-214AC	1d	1k	Vs
39A	-	P4SMA39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
39A	-	P6SMB39A	TVS	Vrwm=39V, Vbr=37.1..41V, 11.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
39A	-	P6SMB39A	TVS	Vrwm=39V, Vbr=37.1..41V, 11.1A, 600W(1ms)	403A	3d	1s	Ons
39A	-	P6SMBJ39A	TVS	Vrwm=39V, Vbr=35.1..42.9V, 11.2A, 600W(1ms)	DO-214AA	1d	1n	Lif
39A	-	SMAJP4KE39A	TVS	Vrwm=33.30V, Vbr=37.10..41.0V, Ipp=7.6A, 400W(1ms)	DO-214AC	1d	1a	Mco
39A	-	SMBJP6KE39A	TVS	Vrwm=33.30V, Vbr=37.10..41.0V, Ipp=11.3A, 600W(1ms)	DO-214AA	1d	1a	Mco
39A	-	SMCJ1.5KE39A	TVS	Vrwm=33.30V, Vbr=37.10..41.0V, Ipp=28.2A, 1500W(1ms)	DO-214AB	1d	1a	Mco
39A	-	SZP6SMB39A	TVS	Vrwm=39V, Vbr=37.1..41V, 11.1A, 600W(1ms)	403A	3d	1s	Ons
39A	-	TVP04A390A-G	TVS	Vbr=37.05..40.95V, Vrwm=33.3V, Ipp=7.42A, 400W(1ms)	DO-214AC	1d	2o	Cmc
39A	-	TVP06B39A-G	TVS	Vrwm=33.3V, Vbr=37.05..40.90V, Ipp=11.13A, 600W(1ms)	DO-214AA	1d	2o	Cmc
39AP	-	15TPSMC39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 28.2A, 1500W(1ms)	DO-214AB	1d	1p	Lif
39AP	-	4TPSMA39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.6A, 400W(1ms)	DO-214AC	1d	1p	Lif
39AP	-	6TPSMB39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 11.3A, 600W(1ms)	DO-214AA	1d	1p	Lif
39B	-	1PMT5939B	Zener diode	39V±5%, Izt=38mA, 2.5W	DO-216AA	4d	1g	Ons
39B	-	1SMB3EZ39	Zener diode	39V±5%, Zzt=30Ω, Izt=19.0mA, 3W	DO-214AA	1d	1a	Pjt
39B	-	MMHZ5239BPT	Zener diode	8.645..9.555V, Izt=5mA, Zzt=10Ω, 225mW	SOD-123	5d	1a	Chm
39B	-	SMAJ5939B	Zener diode	39V±5%, Izt=9.6mA, Zzt=45.0Ω, 1.5W	DO-214AC	1d	1a	Mco
39B	-	Z3SMB39B	Zener diode	37.05..40.95V, Izt=19mA, Zzt=28Ω, 3W	DO-214AA	1d	1a	Ttr
39C	-	1.5SMC39CA	TVS	Vrwm=33.3V, Vbr=37.1..41V, Ipp=28A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
39C	-	1.5SMC39CA	TVS	Vrwm=33.3V, Vbr=37.1..41V, Ipp=28A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
39C	-	1.5SMC39CA	TVS	Vrwm=33.3V, Vbr=37.1..41V, Ipp=28A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
39C	-	P4SMA39C	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 7.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
39C	-	P4SMA39CA	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
39C	-	P6SMB39CA	TVS	Vrwm=39V, Vbr=37.1..41V, 11.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
39C	-	P6SMBJ39C	TVS	Vrwm=39V, Vbr=35.1..42.9V, 10.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
39C	-	SMAJP4KE39CA	TVS	Vrwm=33.30V, Vbr=37.10..41.0V, Ipp=7.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
39C	-	SMBJP6KE39CA	TVS	Vrwm=33.30V, Vbr=37.10..41.0V, Ipp=11.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
39C	-	SMCJ1.5KE39CA	TVS	Vrwm=33.30V, Vbr=37.10..41.0V, Ipp=28.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
39C	-	TVP04A390CA-G	TVS	Vbr=37.05..40.95V, Vrwm=33.3V, Ipp=7.42A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
39C	-	TVP06B39ACA-G	TVS	Vrwm=33.3V, Vbr=37.05..40.90V, Ipp=11.13A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
39CA	-	P4SMA39CA	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
39CA	-	P6SMB39CA	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 11.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
39CA	-	P6SMBJ39CA	TVS	Vrwm=39V, Vbr=35.1..42.9V, 11.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
39CP	-	15TPSMC39CA	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 28.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
39CP	-	4TPSMA39CA	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1p	Lif
39CP	-	6TPSMB39CA	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 11.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
39P	-	BZD27C39P	Zener diode	37.05..40.95V, Zzt=40Ω, Izt=10mA, 800mW	SOD-123FL	7d	1a	Pjt
39P	-	MFPZ39	Zener diode	37.05..40.95V, Izt=10mA, Zzt=40Ω, 800mW	SOD-123FL	7d	1a	Ttr
39S	-	MMHZ5239SPT	Zener diode	8.918..9.282V, Izt=5mA, Zzt=10Ω, 225mW	SOD-123	5d	1a	Chm
39VB	-	BZT52B39	Zener diode	38.22..39.78V, Izt=2mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Tsc
39VB	-	MMSZ39VBW	Zener diode	38.22..39.78V, Izt=2mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Tac
39VZ	-	BZT52C39	Zener diode	37.05..40.95V, Izt=2mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Tsc
39VZ	-	MMSZ39VCW	Zener diode	37.05..40.95V, Izt=2mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Tac
39VZ	-	TCMMSZ39V	Zener diode	39V±5%, Izt=5mA, Zzt=122Ω, 500mW	SOD-123FL	7d	1a	Tac
39VZ	-	ZGFM0539C-MH	Zener diode	37.05..40.95V, Izt=5mA, Zzt=122Ω, 500mW	SOD-123	5d	1a	Pic
3A	-	FS8D	Si-diode	Rectifier, 200V, 8A, Vf<1.2V(8A), 60pF	DO-214AB	1d	2j	Fag
3A	-	HZU3ALL	Zener diode	2.5..2.9V, Izt=0.5mA, Zzt=360Ω, 150mW	URP	5d	1a	Ren
3A	-	MM3Z43	Zener diode	40..46V, Izt=2.5mA, Zzt=130Ω, 300mW	SOD-323FL	7d	1a	Lge
3A	-	MM3Z43V	Zener diode	40..46V, Izt=2mA, Zzt=150Ω, 200mW	SOD-323FL	7d	1a	Eic
3A	-	TDZ2V4J	Zener diode	2.35..2.45V, Izt=5mA, Zzt=100Ω, 500mW	SOD-323F	7d	1a	Nxp
3A0	-	CZRB3005-G	Zener diode	6.2V±5%, Zzt=1.5Ω, Izm=435mA, 3W	DO-214AA	1d	1a	Cmc
3A0	-	RKZ3.0AKU	Zener diode	2.85..3.07V, Izt=20mA, Zzt=120Ω, 500mW	TURP-FM	7d	1a	Ren
3A0	-	SMB3EZ6.2D5	Zener diode	6.2V±5%, Izt=121mA, Zzt=1.5Ω, 3W	DO-214AA	1d	1a	Ers
3A1	-	CZRB3006-G	Zener diode	6.8V±5%, Zzt=2.0Ω, Izm=393mA, 3W	DO-214AA	1d	1a	Cmc
3A1	-	SMB3EZ6.8D5	Zener diode	6.8V±5%, Izt=110mA, Zzt=2.0Ω, 3W	DO-214AA	1d	1a	Ers
3A2	-	CZRB3007-G	Zener diode	7.5V±5%, Zzt=2.0Ω, Izm=360mA, 3W	DO-214AA	1d	1a	Cmc
3A2	-	SMB3EZ7.5D5	Zener diode	7.5V±5%, Izt=100mA, Zzt=2.0Ω, 3W	DO-214AA	1d	1a	Ers
3A3	-	CZRB3008-G	Zener diode	8.2V±5%, Zzt=2.3Ω, Izm=330mA, 3W	DO-214AA	1d	1a	Cmc
3A3	-	RKZ3.3AKU	Zener diode	3.16..3.38V, Izt=20mA, Zzt=130Ω, 500mW	TURP-FM	7d	1a	Ren
3A3	-	SMB3EZ8.2D5	Zener diode	8.2V±5%, Izt=91mA, Zzt=2.3Ω, 3W	DO-214AA	1d	1a	Ers
3A4	-	CZRB3009-G	Zener diode	9.1V±5%, Zzt=2.4Ω, Izm=297mA, 3W	DO-214AA	1d	1a	Cmc
3A4	-	SMB3EZ9.1D5	Zener diode	9.1V±5%, Izt=82mA, Zzt=2.5Ω, 3W	DO-214AA	1d	1a	Ers
3A5	-	CZRB3010-G	Zener diode	10.0V±5%, Zzt=3.5Ω, Izm=270mA, 3W	DO-214AA	1d	1a	Cmc
3A5	-	SMB3EZ10D5	Zener diode	10V±5%, Izt=75mA, Zzt=3.5Ω, 3W	DO-214AA	1d	1a	Ers
3A6	-	CZRB3011-G	Zener diode	11.0V±5%, Zzt=4.0Ω, Izm=225mA, 3W	DO-214AA	1d	1a	Cmc
3A6	-	RKZ3.6AKU	Zener diode	3.45..3.69V, Izt=20 mA, Zzt=130Ω, 500mW	TURP-FM	7d	1a	Ren
3A6	-	SMB3EZ11D5	Zener diode	11V±5%, Izt=68mA, Zzt=4.0Ω, 3W	DO-214AA	1d	1a	Ers
3A7	-	CZRB3012-G	Zener diode	12.0V±5%, Zzt=4.5Ω, Izm=246mA, 3W	DO-214AA	1d	1a	Cmc
3A7	-	SMB3EZ12D5	Zener diode	12V±5%, Izt=63mA, Zzt=4.5Ω, 3W	DO-214AA	1d	1a	Ers
3A8	-	CZRB3013-G	Zener diode	13.0V±5%, Zzt=4.5Ω, Izm=208mA, 3W	DO-214AA	1d	1a	Cmc
3A8	-	SMB3EZ13D5	Zener diode	13V±5%, Izt=58mA, Zzt=4.5Ω, 3W	DO-214AA	1d	1a	Ers
3A9	-	CZRB3014-G	Zener diode	14.0V±5%, Zzt=5.0Ω, Izm=19mA, 3W	DO-214AA	1d	1a	Cmc
3A9	-	RKZ3.9AKU	Zener diode	3.74..4.01V, Izt=20mA, Zzt=130Ω, 500mW	TURP-FM	7d	1a	Ren
3A9	-	SMB3EZ14D5	Zener diode	14V±5%, Izt=53mA, Zzt=5.0Ω, 3W	DO-214AA	1d	1a	Ers
3AW	-	3KASMC10	TVS	Vbr=11.1..13.6V, Vrwm=10V, 160A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3AX	-	3KASMC10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, 177A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3AY	-	3KASMC11	TVS	Vbr=12.2..14.9V, Vrwm=11V, 149A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3AZ	-	3KASMC11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, 165A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3B	-	FS8J	Si-diode	Rectifier, 600V, 8A, Vf<1.2V(8A), 60pF	DO-214AB	1d	2j	Fag
3B	-	HZU3BLL	Zener diode	2.8..3.2V, Izt=0.5mA, Zzt=360Ω, 150mW	URP	5d	1a	Ren
3B	-	MM3Z47	Zener diode	44..50V, Izt=2.5mA, Zzt=150Ω, 300mW	SOD-323FL	7d	1a	Lge
3B	-	MM3Z47V	Zener diode	44..50V, Izt=2mA, Zzt=170Ω, 200mW	SOD-323FL	7d	1a	Eic
3B	-	TDZ2V7J	Zener diode	2.65..2.75V, Izt=5mA, Zzt=100Ω, 500mW	SOD-323F	7d	1a	Nxp
3B0	-	CZRB3015-G	Zener diode	15.0V±5%, Zzt=5.5Ω, Izm=180mA, 3W	DO-214AA	1d	1a	Cmc
3B0	-	RKZ3.0BKU	Zener diode	3.01..3.22 V, Izt=20mA, Zzt=120Ω, 500mW	TURP-FM	7d	1a	Ren
3B0	-	SMB3EZ15D5	Zener diode	15V±5%, Izt=50mA, Zzt=5.5Ω, 3W	DO-214AA	1d	1a	Ers
3B1	-	CZRB3016-G	Zener diode	16.0V±5%, Zzt=5.5Ω, Izm=169mA, 3W	DO-214AA	1d	1a	Cmc
3B1	-	SMB3EZ16D5	Zener diode	16V±5%, Izt=47mA, Zzt=5.5Ω, 3W	DO-214AA	1d	1a	Ers
3B1	-	STZ8082C	Zener diode	8.29..8.7V, Izt=5mA, Zzt=20Ω, 300mW	SOD-323	5d	1a	Jiy
3B2	-	CZRB3017-G	Zener diode	17.0V±5%, Zzt=6.0Ω, Izm=159mA, 3W	DO-214AA	1d	1a	Cmc
3B2	-	SMB3EZ17D5	Zener diode	17V±5%, Izt=44mA, Zzt=6.0Ω, 3W	DO-214AA	1d	1a	Ers

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
3B3	-	CZRB3018-G	Zener diode	18.0V±5%, Zzt=6.0Ω, Izm=150mA, 3W	DO-214AA	1d	1a	Cmc
3B3	-	RKZ3.3BKU	Zener diode	3.32..3.53V, Izt=20mA, Zzt=130Ω, 500mW	TURP-FM	7d	1a	Ren
3B3	-	SMB3EZ18D5	Zener diode	18V±5%, Izt=42mA, Zzt=6.0Ω, 3W	DO-214AA	1d	1a	Ers
3B4	-	CZRB3019-G	Zener diode	19.0V±5%, Zzt=7.0Ω, Izm=142mA, 3W	DO-214AA	1d	1a	Cmc
3B4	-	SMB3EZ19D5	Zener diode	19V±5%, Izt=40mA, Zzt=7.0Ω, 3W	DO-214AA	1d	1a	Ers
3B5	-	CZRB3020-G	Zener diode	20.0V±5%, Zzt=7.0Ω, Izm=135mA, 3W	DO-214AA	1d	1a	Cmc
3B5	-	SMB3EZ20D5	Zener diode	20V±5%, Izt=37mA, Zzt=7.0Ω, 3W	DO-214AA	1d	1a	Ers
3B6	-	CZRB3022-G	Zener diode	22.0V±5%, Zzt=8.0Ω, Izm=123mA, 3W	DO-214AA	1d	1a	Cmc
3B6	-	RKZ3.6BKU	Zener diode	3.60..3.84V, Izt=20mA, Zzt=130Ω, 500mW	TURP-FM	7d	1a	Ren
3B6	-	SMB3EZ22D5	Zener diode	22V±5%, Izt=34mA, Zzt=8.0Ω, 3W	DO-214AA	1d	1a	Ers
3B7	-	CZRB3024-G	Zener diode	24.0V±5%, Zzt=9.0Ω, Izm=112mA, 3W	DO-214AA	1d	1a	Cmc
3B7	-	SMB3EZ24D5	Zener diode	24V±5%, Izt=31mA, Zzt=9.0Ω, 3W	DO-214AA	1d	1a	Ers
3B8	-	CZRB3027-G	Zener diode	27.0V±5%, Zzt=10.0Ω, Izm=100mA, 3W	DO-214AA	1d	1a	Cmc
3B8	-	SMB3EZ27D5	Zener diode	27V±5%, Izt=28mA, Zzt=10Ω, 3W	DO-214AA	1d	1a	Ers
3B9	-	CZRB3028-G	Zener diode	28.0V±5%, Zzt=12.0Ω, Izm=96mA, 3W	DO-214AA	1d	1a	Cmc
3B9	-	RKZ3.9BKU	Zener diode	3.89..4.16V, Izt=20mA, Zzt=130Ω, 500mW	TURP-FM	7d	1a	Ren
3B9	-	SMB3EZ28D5	Zener diode	28V±5%, Izt=27mA, Zzt=12Ω, 3W	DO-214AA	1d	1a	Ers
3BD	-	3KASMC12	TVS	Vbr=13.3..16.3V, Vrwm=12V, 136A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BE	-	3KASMC12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, 151A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BF	-	3KASMC13	TVS	Vbr=14.4..17.6V, Vrwm=13V, 126A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BG	-	3KASMC13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, 140A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BH	-	3KASMC14	TVS	Vbr=15.6..19.1V, Vrwm=14V, 116A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BK	-	3KASMC14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, 129A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BL	-	3KASMC15	TVS	Vbr=16.7..20.4V, Vrwm=15V, 112A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BM	-	3KASMC15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, 123A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BN	-	3KASMC16	TVS	Vbr=17.8..21.8V, Vrwm=16V, 104A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BP	-	3KASMC16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, 115A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BQ	-	3KASMC17	TVS	Vbr=18.9..23.1V, Vrwm=17V, 98.4A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BR	-	3KASMC17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, 109A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BS	-	3KASMC18	TVS	Vbr=20.0 24.4V, Vrwm=18V, 93.2A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BT	-	3KASMC18A	TVS	Vbr=20.0 22.1V, Vrwm=18V, 103A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BU	-	3KASMC20	TVS	Vbr=22.2 27.1V, Vrwm=20V, 83.8A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BV	-	3KASMC20A	TVS	Vbr=22.2 24.5V, Vrwm=20V, 92.6A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BW	-	3KASMC22	TVS	Vbr=24.4 29.8V, Vrwm=22V, 76.1A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BX	-	3KASMC22A	TVS	Vbr=24.4 26.9V, Vrwm=22V, 84.5A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BY	-	3KASMC24	TVS	Vbr=26.7 32.6V, Vrwm=24V, 69.8A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3BZ	-	3KASMC24A	TVS	Vbr=26.7 29.5V, Vrwm=24V, 77.1A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3C	-	BZT52C8V7WU	Zener diode	8.27..9.14V, Izt=5mA, Zzt=15Ω, 200mW	SOD-723	7d	1a	Ttr
3C	-	BZX784C8V7	Zener diode	8.27..9.14V, Zzt=15Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
3C	-	CDZ55C3V3T	Zener diode	3.14..3.47V, Zzt=85Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
3C	-	FS8M	Si-diode	Rectifier, 1000, 8A, Vf<1.2V(8A), 60pF	DO-214AB	1d	2j	Fag
3C	-	GBLC03C	TVS	Vrwm=3V, 20A, 350W(1ms), 3pF, Bidir.	SOD-323	5ba	1e	Prt
3C	-	HZU3CLL	Zener diode	3.1..3.5V, Izt=0.5mA, Zzt=360Ω, 150mW	URP	5d	1a	Ren
3C	-	MM3Z51	Zener diode	48..54V, Izt=2.5mA, Zzt=180Ω, 300mW	SOD-323FL	7d	1a	Lge
3C	-	MM3Z51V	Zener diode	48..54V, Izt=2mA, Zzt=180Ω, 200mW	SOD-323FL	7d	1a	Eic
3C	-	TDZ3V0J	Zener diode	2.94..3.06V, Izt=5mA, Zzt=95Ω, 500mW	SOD-323F	7d	1a	Nxp
3C0	-	CZRB3030-G	Zener diode	30.0V±5%, Zzt=16.0Ω, Izm=90mA, 3W	DO-214AA	1d	1a	Cmc
3C0	-	SMB3EZ30D5	Zener diode	30V±5%, Izt=25mA, Zzt=16Ω, 3W	DO-214AA	1d	1a	Ers
3C1	-	CZRB3033-G	Zener diode	33.0V±5%, Zzt=20.0Ω, Izm=82mA, 3W	DO-214AA	1d	1a	Cmc
3C1	-	SMB3EZ33D5	Zener diode	33V±5%, Izt=23mA, Zzt=20Ω, 3W	DO-214AA	1d	1a	Ers
3C2	-	CZRB3036-G	Zener diode	36.0V±5%, Zzt=22.0Ω, Izm=75mA, 3W	DO-214AA	1d	1a	Cmc
3C2	-	SMB3EZ36D5	Zener diode	36V±5%, Izt=21mA, Zzt=22Ω, 3W	DO-214AA	1d	1a	Ers
3C3	-	CZRB3039-G	Zener diode	39.0V±5%, Zzt=28.0Ω, Izm=69mA, 3W	DO-214AA	1d	1a	Cmc
3C3	-	SMB3EZ39D5	Zener diode	39V±5%, Izt=19mA, Zzt=28Ω, 3W	DO-214AA	1d	1a	Ers
3C4	-	CZRB3043-G	Zener diode	43.0V±5%, Zzt=33.0Ω, Izm=63mA, 3W	DO-214AA	1d	1a	Cmc
3C4	-	SMB3EZ43D5	Zener diode	43V±5%, Izt=17mA, Zzt=33Ω, 3W	DO-214AA	1d	1a	Ers
3C5	-	CZRB3047-G	Zener diode	47.0V±5%, Zzt=38.0Ω, Izm=57mA, 3W	DO-214AA	1d	1a	Cmc
3C5	-	SMB3EZ47D5	Zener diode	47V±5%, Izt=16mA, Zzt=38Ω, 3W	DO-214AA	1d	1a	Ers
3C6	-	CZRB3051-G	Zener diode	51.0V±5%, Zzt=45.0Ω, Izm=53mA, 3W	DO-214AA	1d	1a	Cmc
3C6	-	SMB3EZ51D5	Zener diode	51V±5%, Izt=15mA, Zzt=45Ω, 3W	DO-214AA	1d	1a	Ers
3C7	-	CZRB3056-G	Zener diode	56.0V±5%, Zzt=50.0Ω, Izm=48mA, 3W	DO-214AA	1d	1a	Cmc
3C7	-	SMB3EZ56D5	Zener diode	56V±5%, Izt=13mA, Zzt=50Ω, 3W	DO-214AA	1d	1a	Ers
3C8	-	CZRB3062-G	Zener diode	62.0V±5%, Zzt=55.0Ω, Izm=44mA, 3W	DO-214AA	1d	1a	Cmc
3C8	-	SMB3EZ62D5	Zener diode	62V±5%, Izt=12mA, Zzt=55Ω, 3W	DO-214AA	1d	1a	Ers
3C9	-	CZRB3068-G	Zener diode	68.0V±5%, Zzt=70.0Ω, Izm=40mA, 3W	DO-214AA	1d	1a	Cmc
3C9	-	SMB3EZ68D5	Zener diode	68V±5%, Izt=11mA, Zzt=70Ω, 3W	DO-214AA	1d	1a	Ers
3CD	-	3KASMC26	TVS	Vbr=28.9 35.3V, Vrwm=26V, 64.4A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3CE	-	3KASMC26A	TVS	Vbr=28.9 31.9V, Vrwm=26V, 71.3A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3CF	-	3KASMC28	TVS	Vbr=31.1 38.0V, Vrwm=28V, 60.0A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3CG	-	3KASMC28A	TVS	Vbr=31.1 34.4V, Vrwm=28V, 66.1A, 3000W(1ms)	DO-214AB	1d	1k	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
3CH	-	3KASMC30	TVS	Vbr=33.3 40.7V, Vrwm=30V, 56.1A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3CK	-	3KASMC30A	TVS	Vbr=33.3 36.8V, Vrwm=30V, 62.0A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3CL	-	3KASMC33	TVS	Vbr=36.7 44.9V, Vrwm=33V, 50.8A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3CM	-	3KASMC33A	TVS	Vbr=36.7 40.6V, Vrwm=33V, 56.3A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3CN	-	3KASMC36	TVS	Vbr=40.0 48.9V, Vrwm=36V, 46.7A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3CP	-	3KASMC36A	TVS	Vbr=40.0 44.2V, Vrwm=36V, 51.6A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3CQ	-	3KASMC40	TVS	Vbr=44.4 54.3V, Vrwm=40V, 42.0A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3CR	-	3KASMC40A	TVS	Vbr=44.4 49.1V, Vrwm=40V, 46.5A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3CS	-	3KASMC43	TVS	Vbr=47.8 58.4V, Vrwm=43V, 39.1A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3CT	-	3KASMC43A	TVS	Vbr=47.8 52.8V, Vrwm=43V, 43.2A, 3000W(1ms)	DO-214AB	1d	1k	Vs
3D	-	FS8K	Si-diode	Rectifier, 800V, 8A, Vf<1.2V(8A), 60pF	DO-214AB	1d	2j	Fag
3D	-	MM3Z56	Zener diode	52..60V, Izt=2.5mA, Zzt=180Ω, 300mW	SOD-323FL	7d	1a	Lge
3D	-	MM3Z56V	Zener diode	52..60V, Izt=2mA, Zzt=200Ω, 200mW	SOD-323FL	7d	1a	Eic
3D	-	TDZ3V3J	Zener diode	3.23..3.37V, Izt=5mA, Zzt=95Ω, 500mW	SOD-323F	7d	1a	Nxp
3D	-	WOSD03	TVS	Vbr=5V, Vcl=7..8.5V, Ipp=12A, 300W(1ms)	SOD-323	5d	1e	Wtr
3D1	-	STZ8091A	Zener diode	8.58..9.02V, Izt=5mA, Zzt=20Ω, 300mW	SOD-323	5d	1a	Jiy
3E	-	FS8K	Si-diode	Rectifier, 800V, 8A, Vf<1.2V(8A), 60pF	DO-214AB	1d	2j	Fag
3E	-	MM3Z62	Zener diode	58..66V, Izt=2.5mA, Zzt=200Ω, 300mW	SOD-323FL	7d	1a	Lge
3E	-	MM3Z62V	Zener diode	58..66V, Izt=2mA, Zzt=215Ω, 200mW	SOD-323FL	7d	1a	Eic
3E	-	TDZ3V6J	Zener diode	3.53..3.67V, Izt=5mA, Zzt=90Ω, 500mW	SOD-323F	7d	1a	Nxp
3F	-	CDZ55C3V6T	Zener diode	3.42..3.78V, Zzt=85Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
3F	-	KDZ3.9FV	Zener diode	3.70..4.10V, Izt=5mA, Zzt=130Ω, 100mW	TFSC	7d	1a	Kec
3F	-	MAZD030	Zener diode	2.8..3.2V, Zzt=120Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
3F	-	MM3Z68	Zener diode	64..72V, Izt=2.5mA, Zzt=250Ω, 300mW	SOD-323FL	7d	1a	Lge
3F	-	MM3Z68V	Zener diode	64..72V, Izt=2mA, Zzt=240Ω, 200mW	SOD-323FL	7d	1a	Eic
3F	-	TDZ3V9J	Zener diode	3.82..3.98V, Izt=5mA, Zzt=90Ω, 500mW	SOD-323F	7d	1a	Nxp
3F0	-	CZRB3075-G	Zener diode	75.0V±5%, Zzt=85.0Ω, Izm=36mA, 3W	DO-214AA	1d	1a	Cmc
3F0	-	SMB3EZ75D5	Zener diode	75V±5%, Izt=10mA, Zzt=85Ω, 3W	DO-214AA	1d	1a	Ers
3F1	-	CZRB3082-G	Zener diode	82.0V±5%, Zzt=95.0Ω, Izm=33mA, 3W	DO-214AA	1d	1a	Cmc
3F1	-	SMB3EZ82D5	Zener diode	82V±5%, Izt=9.1mA, Zzt=95Ω, 3W	DO-214AA	1d	1a	Ers
3F1	-	STZ8091C	Zener diode	9.14..9.6V, Izt=5mA, Zzt=20Ω, 300mW	SOD-323	5d	1a	Jiy
3F2	-	CZRB3091-G	Zener diode	91.0V±5%, Zzt=115.0Ω, Izm=30mA, 3W	DO-214AA	1d	1a	Cmc
3F2	-	SMB3EZ91D5	Zener diode	91V±5%, Izt=8.2mA, Zzt=115Ω, 3W	DO-214AA	1d	1a	Ers
3F3	-	CZRB3100-G	Zener diode	100.0V±5%, Zzt=160.0Ω, Izm=27mA, 3W	DO-214AA	1d	1a	Cmc
3F3	-	SMB3EZ100D5	Zener diode	100V±5%, Izt=7.5mA, Zzt=160Ω, 3W	DO-214AA	1d	1a	Ers
3F4	-	CZRB3110-G	Zener diode	110.0V±5%, Zzt=225.0Ω, Izm=25mA, 3W	DO-214AA	1d	1a	Cmc
3F4	-	SMB3EZ110D5	Zener diode	110V±5%, Izt=6.8mA, Zzt=225Ω, 3W	DO-214AA	1d	1a	Ers
3F5	-	CZRB3120-G	Zener diode	120.0V±5%, Zzt=300.0Ω, Izm=22mA, 3W	DO-214AA	1d	1a	Cmc
3F5	-	SMB3EZ120D5	Zener diode	120V±5%, Izt=6.3mA, Zzt=300Ω, 3W	DO-214AA	1d	1a	Ers
3F6	-	CZRB3130-G	Zener diode	130.0V±5%, Zzt=375.0Ω, Izm=21mA, 3W	DO-214AA	1d	1a	Cmc
3F6	-	SMB3EZ130D5	Zener diode	130V±5%, Izt=5.8mA, Zzt=375Ω, 3W	DO-214AA	1d	1a	Ers
3F7	-	CZRB3140-G	Zener diode	140.0V±5%, Zzt=475.0Ω, Izm=19mA, 3W	DO-214AA	1d	1a	Cmc
3F7	-	SMB3EZ140D5	Zener diode	140V±5%, Izt=5.3mA, Zzt=475Ω, 3W	DO-214AA	1d	1a	Ers
3F8	-	CZRB3150-G	Zener diode	150.0V±5%, Zzt=550.0Ω, Izm=18mA, 3W	DO-214AA	1d	1a	Cmc
3F8	-	SMB3EZ150D5	Zener diode	150V±5%, Izt=5mA, Zzt=550Ω, 3W	DO-214AA	1d	1a	Ers
3F9	-	CZRB3160-G	Zener diode	160.0V±5%, Zzt=625.0Ω, Izm=17mA, 3W	DO-214AA	1d	1a	Cmc
3F9	-	SMB3EZ160D5	Zener diode	160V±5%, Izt=4.7mA, Zzt=625Ω, 3W	DO-214AA	1d	1a	Ers
3G	-	FS8D	Si-diode	Rectifier, 200V, 8A, Vf<1.2V(8A), 60pF	DO-214AB	1d	2j	Fag
3G	-	TDZ4V3J	Zener diode	4.21..4.39V, Izt=5mA, Zzt=90Ω, 500mW	SOD-323F	7d	1a	Nxp
3G1	-	CZRB3170-G	Zener diode	170.0V±5%, Zzt=650.0Ω, Izm=16mA, 3W	DO-214AA	1d	1a	Cmc
3G1	-	SMB3EZ170D5	Zener diode	170V±5%, Izt=4.4mA, Zzt=650Ω, 3W	DO-214AA	1d	1a	Ers
3G2	-	CZRB3180-G	Zener diode	180.0V±5%, Zzt=700.0Ω, Izm=15mA, 3W	DO-214AA	1d	1a	Cmc
3G2	-	SMB3EZ180D5	Zener diode	180V±5%, Izt=4.2mA, Zzt=700Ω, 3W	DO-214AA	1d	1a	Ers
3G3	-	CZRB3190-G	Zener diode	190.0V±5%, Zzt=800.0Ω, Izm=14mA, 3W	DO-214AA	1d	1a	Cmc
3G3	-	SMB3EZ190D5	Zener diode	190V±5%, Izt=4.0mA, Zzt=800Ω, 3W	DO-214AA	1d	1a	Ers
3G4	-	CZRB3200-G	Zener diode	200.0V±5%, Zzt=875.0Ω, Izm=13mA, 3W	DO-214AA	1d	1a	Cmc
3G4	-	SMB3EZ200D5	Zener diode	200V±5%, Izt=3.7mA, Zzt=875Ω, 3W	DO-214AA	1d	1a	Ers
3GS	-	MURS340S	Si-diode	Rectifier, 400V, 3A, Vf<1.2V(3A)	DO-214AA	1d	1k	Vs
3H	-	FS8J	Si-diode	Rectifier, 600V, 8A, Vf<1.2V(8A), 60pF	DO-214AB	1d	2j	Fag
3H	-	MM3Z75	Zener diode	70..79V, Izt=2.5mA, Zzt=300Ω, 300mW	SOD-323FL	7d	1a	Lge
3H	-	MM3Z75V	Zener diode	70..79V, Izt=2mA, Zzt=255Ω, 200mW	SOD-323FL	7d	1a	Eic
3H	-	TDZ4V7J	Zener diode	4.61..4.79V, Izt=5mA, Zzt=80Ω, 500mW	SOD-323F	7d	1a	Nxp
3H1	-	STZ8100A	Zener diode	9.44..9.92V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Jiy
3I	-	CDZ55C3V9T	Zener diode	3.71..4.10V, Zzt=85Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
3I	-	FS8M	Si-diode	Rectifier, 1000, 8A, Vf<1.2V(8A), 60pF	DO-214AB	1d	2j	Fag
3J	-	MM3Z82	Zener diode	77..87V, Izt=2.5mA, Zzt=300Ω, 300mW	SOD-323FL	7d	1a	Lge
3J	-	TDZ5V1J	Zener diode	5.0..5.20V, Izt=5mA, Zzt=60Ω, 500mW	SOD-323F	7d	1a	Nxp
3JS	-	MURS360S	Si-diode	Rectifier, 600V, 3A, Vf<1.2V(3A)	DO-214AA	1d	1k	Vs
3K	-	MM3Z91	Zener diode	85..96V, Izt=1mA, Zzt=700Ω, 300mW	SOD-323FL	7d	1a	Lge
3K	-	TDZ6V2J	Zener diode	6.08..6.32V, Izt=5mA, Zzt=10Ω, 500mW	SOD-323F	7d	1a	Nxp

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
3K1	-	STZ8100C	Zener diode	10.07..10.59V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Jiy
3L	-	TDZ6V8J	Zener diode	6.66..6.94V, Izt=5mA, Zzt=15Ω, 500mW	SOD-323F	7d	1a	Nxp
3M	-	MM3Z100	Zener diode	94..106V, Izt=1mA, Zzt=700Ω, 300mW	SOD-323FL	7d	1a	Lge
3M1	-	STZ8110A	Zener diode	10.4..10.94V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Jiy
3N	-	MM3Z110	Zener diode	104..116V, Izt=1mA, Zzt=800Ω, 300mW	SOD-323FL	7d	1a	Lge
3N	-	TDZ7V5J	Zener diode	7.5..7.65V, Izt=5mA, Zzt=10Ω, 500mW	SOD-323F	7d	1a	Nxp
3P	-	CMDZ22L	Zener diode	20.90..23.10V, Izt=0.5mA, Zzt=100Ω, 250mW	SOD-323	5d	1a	Cen
3P	-	KDZ3.9FVY	Zener diode	3.89..4.16V, Izt=5mA, Zzt=130Ω, 100mW	TFSC	7d	1a	Kec
3P	-	MM3Z120	Zener diode	114..127V, Izt=1mA, Zzt=900Ω, 300mW	SOD-323FL	7d	1a	Lge
3P	-	TDZ8V2J	Zener diode	8.04..8.36V, Izt=5mA, Zzt=10Ω, 500mW	SOD-323F	7d	1a	Nxp
3P1	-	STZ8110C	Zener diode	11.05..11.6V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Jiy
3P3	-	SML4728	Zener diode	3.3V±5%, Izt=76mA, Zzt=10Ω, 1W	DO-214AC	1d	1k	Vs
3P6	-	SML4729	Zener diode	3.6V±5%, Izt=69mA, Zzt=10Ω, 1W	DO-214AC	1d	1k	Vs
3P9	-	SML4730	Zener diode	3.9V±5%, Izt=64mA, Zzt=9Ω, 1W	DO-214AC	1d	1k	Vs
3Q	-	TDZ9V1J	Zener diode	8.92..9.28V, Izt=5mA, Zzt=10Ω, 500mW	SOD-323F	7d	1a	Nxp
3R	-	TDZ10J	Zener diode	9.80..10.20V, Izt=5mA, Zzt=10Ω, 500mW	SOD-323F	7d	1a	Nxp
3R1	-	STZ8120A	Zener diode	11.4..11.96V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Jiy
3S	-	TDZ11J	Zener diode	10.80..11.20V, Izt=5mA, Zzt=10Ω, 500mW	SOD-323F	7d	1a	Nxp
3T	-	TDZ12J	Zener diode	11.80..12.20V, Izt=5mA, Zzt=10Ω, 500mW	SOD-323F	7d	1a	Nxp
3T1	-	STZ8120C	Zener diode	12.06..12.68V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Jiy
3U	-	TDZ13J	Zener diode	12.70..13.30V, Izt=5mA, Zzt=10Ω, 500mW	SOD-323F	7d	1a	Nxp
3U3	-	GBLC24C	Si-diode	24V, 6A, 350W(1ms), 3pF, Bidir.	SOD-323	5ba	1e	Prt
3U3	-	SBR3U30P1	Si-diode	SBR, 30V, 3A, Vf<0.35V(3A)	PowDI123	7d	1d	Di
3V	-	TDZ15J	Zener diode	14.70..15.30V, Izt=5mA, Zzt=15Ω, 500mW	SOD-323F	7d	1a	Nxp
3V0	-	BZY55-C3V0	Zener diode	2.85..3.15V, Izt=5mA, Zzt=85Ω, 500mW	0805	70d	2d	Tsc
3V0	-	CZRSC55C3V0-G	Zener diode	2.85..3.15V, Zt=85Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
3V0B	-	BZT52B3V0	Zener diode	2.94..3.06V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123FL	7d	1a	Tsc
3V0B	-	MMSZ3V0BW	Zener diode	2.94..3.06V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123FL	7d	1a	Tac
3V0Z	-	BZT52C3V0	Zener diode	2.85..3.15V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123FL	7d	1a	Tsc
3V0Z	-	MMSZ3V0CW	Zener diode	2.85..3.15V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123FL	7d	1a	Tac
3V0Z	-	TCMMSZ3V0	Zener diode	3.0V±5%, Izt=5mA, Zzt=89Ω, 500mW	SOD-123FL	7d	1a	Tac
3V0Z	-	ZGFM053V0C-MH	Zener diode	2.85..3.15V, Izt=5mA, Zzt=89Ω, 500mW	SOD-123	5d	1a	Pic
3V3	-	BZY55-C3V3	Zener diode	3.14..3.47V, Izt=5mA, Zzt=85Ω, 500mW	0805	70d	2d	Tsc
3V3	-	CDZ55C3V3	Zener diode	3.14..3.47V, Zzt=85Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
3V3	-	CDZ55C3V3S	Zener diode	3.14..3.47V, Zzt=85Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
3V3	-	CTZ55C3V3	Zener diode	3.14..3.47V, Izt=5mA, Zzt=85Ω, 500mW	1206	70d	2d	Ctc
3V3	-	CZRNC55C3V3-G	Zener diode	3.14..3.4V, Zt=85Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
3V3	-	CZRSC55C3V3-G	Zener diode	3.14..3.47V, Zt=85Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
3V3B	-	BZT52B3V3	Zener diode	3.23..3.37V, Izt=5mA, Zzt=95Ω, 500mW	SOD-123FL	7d	1a	Tsc
3V3B	-	MMSZ3V3BW	Zener diode	3.23..3.37V, Izt=5mA, Zzt=95Ω, 500mW	SOD-123FL	7d	1a	Tac
3V3Z	-	BZT52C3V3	Zener diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 500mW	SOD-123FL	7d	1a	Tsc
3V3Z	-	MMSZ3V3CW	Zener diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 500mW	SOD-123FL	7d	1a	Tac
3V3Z	-	TCMMSZ3V3	Zener diode	3.3V±5%, Izt=5mA, Zzt=89Ω, 500mW	SOD-123FL	7d	1a	Tac
3V3Z	-	ZGFM053V3C-MH	Zener diode	3.14..3.47V, Izt=5mA, Zzt=89Ω, 500mW	SOD-123	5d	1a	Pic
3V6	-	BZD27C3V6P	Zener diode	3.42..3.78V, Zzt=8Ω, Izt=100mA, 800mW	SOD-123FL	7d	1a	Pjt
3V6	-	BZY55-C3V6	Zener diode	3.42..3.78V, Izt=5mA, Zzt=85Ω, 500mW	0805	70d	2d	Tsc
3V6	-	CDZ55C3V6	Zener diode	3.42..3.78V, Zzt=85Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
3V6	-	CDZ55C3V6S	Zener diode	3.42..3.78V, Zzt=85Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
3V6	-	CTZ55C3V6	Zener diode	3.42..3.78V, Izt=5mA, Zzt=85Ω, 500mW	1206	70d	2d	Ctc
3V6	-	CZRNC55C3V6-G	Zener diode	3.42..3.78V, Zt=85Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
3V6	-	CZRSC55C3V6-G	Zener diode	3.42..3.78V, Zt=85Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
3V6	-	MFPZ3V6	Zener diode	4.09..4.52V, Izt=100mA, Zzt=7Ω, 800mW	SOD-123FL	7d	1a	Ttr
3V6B	-	BZT52B3V6	Zener diode	3.53..3.67V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Tsc
3V6B	-	MMSZ3V6BW	Zener diode	3.53..3.67V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Tac
3V6Z	-	BZT52C3V6	Zener diode	3.42..3.78V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Tsc
3V6Z	-	MMSZ3V6CW	Zener diode	3.42..3.78V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Tac
3V6Z	-	TCMMSZ3V6	Zener diode	3.6V±5%, Izt=5mA, Zzt=84Ω, 500mW	SOD-123FL	7d	1a	Tac
3V6Z	-	ZGFM053V6C-MH	Zener diode	3.42..3.78V, Izt=5mA, Zzt=84Ω, 500mW	SOD-123	5d	1a	Pic
3V9	-	BZD27C3V9P	Zener diode	3.71..4.10V, Zzt=8Ω, Izt=100mA, 800mW	SOD-123FL	7d	1a	Pjt
3V9	-	BZY55-C3V9	Zener diode	3.71..4.10V, Izt=5mA, Zzt=85Ω, 500mW	0805	70d	2d	Tsc
3V9	-	CDZ55C3V9	Zener diode	3.71..4.10V, Zzt=85Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
3V9	-	CDZ55C3V9S	Zener diode	3.71..4.10V, Zzt=85Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
3V9	-	CTZ55C3V9	Zener diode	3.71..4.10V, Izt=5mA, Zzt=85Ω, 500mW	1206	70d	2d	Ctc
3V9	-	CZRNC55C3V9-G	Zener diode	3.71..4.10V, Zt=85Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
3V9	-	CZRSC55C3V9-G	Zener diode	3.71..4.10V, Zt=85Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
3V9	-	MFPZ3V9	Zener diode	4.09..4.52V, Izt=100mA, Zzt=7Ω, 800mW	SOD-123FL	7d	1a	Ttr
3V9B	-	BZT52B3V9	Zener diode	3.82..3.98V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Tsc
3V9B	-	MMSZ3V9BW	Zener diode	3.82..3.98V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Tac
3V9Z	-	BZT52C3V9	Zener diode	3.71..4.10V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Tsc
3V9Z	-	MMSZ3V9CW	Zener diode	3.71..4.10V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Tac



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
3V9Z	-	TCMMSZ3V9	Zener diode	3.9V±5%, Izt=5mA, Zzt=84Ω, 500mW	SOD-123FL	7d	1a	Tac
3V9Z	-	ZGFM053V9C-MH	Zener diode	3.71..4.10V, Izt=5mA, Zzt=84Ω, 500mW	SOD-123	5d	1a	Pic
3W	-	MM3Z68V	Zener diode	64..72V, Izt=2mA, Zzt=240Ω, 200mW	SOD-323	5d	1a	Sec
3W	-	TDZ16J	Zener diode	15.70..16.30V, Izt=5mA, Zzt=20Ω, 500mW	SOD-323F	7d	1a	Nxp
3W1	-	STZ8130A	Zener diode	12.4..12.99V, Izt=5mA, Zzt=35Ω, 300mW	SOD-323	5d	1a	Jiy
3Y	-	KDZ13VVY	Zener diode	12.91..13.49V, Izt=5mA, Zzt=15Ω, 100mW	VSC	7d	1a	Kec
3Y	-	TDZ18J	Zener diode	17.6..18.4V, Izt=5mA, Zzt=20Ω, 500mW	SOD-323F	7d	1a	Nxp
3Y1	-	STZ8130C	Zener diode	13.25..14.08V, Izt=5mA, Zzt=35Ω, 300mW	SOD-323	5d	1a	Jiy
3Z	-	BZT52B3V3S	Zener diode	3.23..3.37V, Izt=5mA, Zzt=95Ω, 200mW	SOD-323FL	7d	1a	Tsc
3Z	-	MM3Z3V3B	Zener diode	3.23..3.37V, Zzt=89Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
3Z	-	MM3Z3V3BW	Zener diode	3.23..3.37V, Izt=5mA, Zzt=95Ω, 200mW	SOD-323FL	7d	1a	Tac
3Z	-	TCMM3Z3V3B	Zener diode	3.3V±2%, Izt=5mA, Zzt=89Ω, 200mW	SOD-323FL	7d	1a	Tac
3Z	-	TDZ20J	Zener diode	19.6..20.4V, Izt=5mA, Zzt=20Ω, 500mW	SOD-323F	7d	1a	Nxp
3Z1	-	STZ8140	Zener diode	13.65..14.35V, Izt=5mA, Zzt=40Ω, 300mW	SOD-323	5d	1a	Jiy
4	-	CH601G-70PT	Si-diode	SBD, 70V, 100mA, Vf<0.77V(10mA)	SOD-723	8d	1a	Chm
4	-	GBLC24	TVS	Vrwm=24V, 6A, 350W(1ms), 3pF	SOD-323	5d	1a	Prt
4	-	KDS160F	Si-diode	Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	TFSC	7d	1a	Kec
4	-	MA2SV03	C-diode	VCO, 6V, 5.5..2.35pF(1..4V)	SOD-523	6d	1a	Pan
4	-	MM9D5V1	Zener diode	4.85..5.36V, Izt=5mA, Zzt=80Ω, 200mW	SOD-923	7d	1a	Wtr
4	-	MMPZ5225SPT	Zener diode	2.940..3.060V, Izt=5mA, Zzt=95Ω, 225mW	SOD-323	5d	1a	Chm
4	-	MMSZ5246BPT	Zener diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 225mW	SOD-523	6d	1a	Chm
4	-	NZ9F16VST	Zener diode	15.85..16.51V, Izt=5mA, Zzt=50Ω, 200mW	SOD-923	7d	2m	Ons
4	-	NZ9F3V0ST	Zener diode	2.94..3.26V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1n	Ons
4	-	NZ9F5V1T	Zener diode	4.85..5.36V, Izt=5mA, Zzt=80Ω, 200mW	SOD-923	7d	1a	Ons
4	-	RB501V-40	Si-diode	SBR, 45V, 100mA, Vf<0.55V(100mA), <6pF	SOD-323	5d	1a	Rhm
4	ba	BAS140W	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOD-323	5d	2	Inf
4.	-	MMSZ5246SPT	Zener diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 225mW	SOD-523	6d	1a	Chm
4.3	-	MAZ80430H	Zener diode	4.31..4.54V, Zzt=130Ω(5mA), 150mW	SC-76	6d	1a	Pan
4.3B	-	HZF4.3BP	Zener diode	4.3V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
4.3B	-	PTZ4.3B	Zener diode	4.3V±10%, Izt=40mA, 1W	DO-214AC	1d	1a	Rhm
4.3C	-	HZF4.3CP	Zener diode	4.3V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
4.3G	-	ZD4.3G-CA2	Zener diode	4.3V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
4.3G	-	ZD4.3G-CB2	Zener diode	4.3V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
4.3L	-	ZD4.3L-CA2	Zener diode	4.3V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
4.3L	-	ZD4.3L-CB2	Zener diode	4.3V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
4.7	-	MAZ5047	Zener diode	4.4..5V, Zzt=50Ω(5mA), 500mW	MP2	11d	1a	Pan
4.7	-	MAZ80470H	Zener diode	4.74..4.99V, Zzt=80Ω(5mA), 150mW	SC-76	6d	1a	Pan
4.7	-	MAZY047	Zener diode	4.4..5V, Zzt=60Ω(20mA), 1W	NMiniP2	1d	1a	Pan
4.7B	-	HZF4.7BP	Zener diode	4.7V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
4.7B	-	PTZ4.7B	Zener diode	4.7V±10%, Izt=40mA, 1W	DO-214AC	1d	1a	Rhm
4.7C	-	HZF4.7CP	Zener diode	4.7V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
4.7G	-	ZD4.7G-CA2	Zener diode	4.7V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
4.7G	-	ZD4.7G-CB2	Zener diode	4.7V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
4.7L	-	ZD4.7L-CA2	Zener diode	4.7V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
4.7L	-	ZD4.7L-CB2	Zener diode	4.7V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
4^3	-	MAZ80430H	Zener diode	4.31..4.54V, Zzt=130Ω(5mA), 150mW	SC-76	6d	1a	Pan
4^3	-	MAZ8043GHL	Zener diode	4.31..4.54V, Zzt=130Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
4^7	-	MAZ80470H	Zener diode	4.74..4.99V, Zzt=80Ω(5mA), 150mW	SC-76	6d	1a	Pan
4^7	-	MAZ8047GHL	Zener diode	4.74..4.99V, Zzt=80Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
4_3	-	MAZ80430L	Zener diode	4.03..4.26V, Zzt=130Ω(5mA), 150mW	SC-76	6d	1a	Pan
4_3	-	MAZ8043GLL	Zener diode	4.03..4.26V, Zzt=130Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
4_7	-	MAZ80470L	Zener diode	4.45..4.69V, Zzt=80Ω(5mA), 150mW	SC-76	6d	1a	Pan
4_7	-	MAZ8047GLL	Zener diode	4.45..4.69V, Zzt=80Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
4•3	-	RKZ4.3B2KG	Zener diode	4.15..4.34V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	2e	Ren
4•3	-	RKZ4.3B2KJ	Zener diode	4.15..4.34V, Izt=5mA, Zzt=130Ω, 150mW	UFP	7d	2e	Ren
4•3	am	HZU4.3B3	Zener diode	4.28..4.48V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	1a	Ren
4•3	an	HZU4.3B2	Zener diode	4.15..4.34V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	1a	Ren
4•3	ao	HZU4.3B1	Zener diode	4.01..4.21V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	1a	Ren
4•7	-	RKZ4.7B2KG	Zener diode	4.55..4.75V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	2e	Ren
4•7	-	RKZ4.7B2KJ	Zener diode	4.55..4.75V, Izt=5mA, Zzt=130Ω, 150mW	UFP	7d	2e	Ren
4•7	am	HZU4.7B3	Zener diode	4.69..4.90V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	1a	Ren
4•7	an	HZU4.7B2	Zener diode	4.55..4.75V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	1a	Ren
4•7	ao	HZU4.7B1	Zener diode	4.42..4.61V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	1a	Ren
40	-	BAS40TS	Si-diode	SBD, 40V, 200mA, Vf<1V(40mA), 5pF	SOD-523	5d	1a	Pjt
40	-	HMSZ5240B	Zener diode	10V±5%, Izt=20mA, Zzt=17Ω, 225mW	SOD-323	5d	1d	Hsn
40	-	SMBG40	TVS	Vrwm=40V, Vbr=44.4..56.3V, 8.4A, 600W(1ms)	DO-215AA	5d	1a	Msc
40	-	ZD5240BS2	Zener diode	10V±5%, 20mA, Zzt=17Ω, 500mW	SOD-323	5d	1a	Cys
40	-	ZLLS400TA	Si-diode	SBR, 40V, 520mA, 330mW, Vf<0.52V(400mA)	SOD-323	5d	1a	Zx
40	-	ZLLS400TC	Si-diode	SBR, 40V, 520mA, 330mW, Vf<0.52V(400mA)	SOD-323	5d	1a	Zx
400	-	P4SMA400	TVS	Vbr=360..440V, Vrwm=324V, 0.70A, 400W(1ms)	DO-214AC	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
4001	-	SBM4001PT	Si-diode	Rectifer, 50V, 1A	DO-214AA	1d	1a	Chm
4001	-	SM4001PT	Si-diode	Rectifer, 50V, 1A	DO-214AC	1d	1a	Chm
4002	-	SBM4002PT	Si-diode	Rectifer, 100V, 1A	DO-214AA	1d	1a	Chm
4002	-	SM4002PT	Si-diode	Rectifer, 100V, 1A	DO-214AC	1d	1a	Chm
4003	-	SBM4003PT	Si-diode	Rectifer, 200V, 1A	DO-214AA	1d	1a	Chm
4003	-	SM4003PT	Si-diode	Rectifer, 200V, 1A	DO-214AC	1d	1a	Chm
4004	-	SBM4004PT	Si-diode	Rectifer, 400V, 1A	DO-214AA	1d	1a	Chm
4004	-	SM4004PT	Si-diode	Rectifer, 400V, 1A	DO-214AC	1d	1a	Chm
4005	-	SBM4005PT	Si-diode	Rectifer, 600V, 1A	DO-214AA	1d	1a	Chm
4005	-	SM4005PT	Si-diode	Rectifer, 600V, 1A	DO-214AC	1d	1a	Chm
4006	-	SBM4006PT	Si-diode	Rectifer, 800V, 1A	DO-214AA	1d	1a	Chm
4006	-	SM4006PT	Si-diode	Rectifer, 800V, 1A	DO-214AC	1d	1a	Chm
4007	-	SBM4007PT	Si-diode	Rectifer, 1000V, 1A	DO-214AA	1d	1a	Chm
4007	-	SM4007PT	Si-diode	Rectifer, 1000V, 1A	DO-214AC	1d	1a	Chm
400A	-	1.5SMC400A	TVS	Vrwm=342.0V, Vbr=342..380V, Ipp=2.8A, 1500W(1ms)	DO-214AB	1d	1b	Mde
400A	-	1.5SMC400A	TVS	Vrwm=342.0V, Vbr=342..380V, Ipp=2.8A, 1500W(1ms)	DO-214AB	1d	2s	Lif
400A	-	1.5SMC400A	TVS	Vrwm=342.0V, Vbr=342..380V, Ipp=2.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
400A	-	P4SMA400A	TVS	Vbr=380..420V, Vrwm=342V, 0.73A, 400W(1ms)	DO-214AC	1d	1k	Vs
400A	-	P4SMA400A	TVS	Vbr=380..420V, Vrwm=342V, 0.73A, 400W(1ms)	DO-214AC	1d	1a	Eic
400A	-	P6SMB400A	TVS	Vrwm=342V, Vbr=380..420V, 1.10A, 600W(1ms)	DO-214AA	1d	1k	Vs
400A	-	SMAJP4KE400A	TVS	Vrwm=342.0V, Vbr=380.0..420.0V, Ipp=0.8A, 400W(1ms)	DO-214AC	1d	1a	Mco
400A	-	SMBJP6KE400A	TVS	Vrwm=342.0V, Vbr=380.0..420.0V, Ipp=1.1A, 600W(1ms)	DO-214AA	1d	1a	Mco
400A	-	SMCJ1.5KE400A	TVS	Vrwm=342.0V, Vbr=380.0..420.0V, Ipp=2.8A, 1500W(1ms)	DO-214AB	1d	1a	Mco
400A	-	TVP04A401A-G	TVS	Vbr=380.0..420.0V, Vrwm=342.0V, Ipp=0.72A, 400W(1ms)	DO-214AC	1d	2o	Cmc
400A	-	TVP06B401A-G	TVS	Vrwm=342.0V, Vbr=380.0..420.0V, Ipp=1.09A, 600W(1ms)	DO-214AA	1d	2o	Cmc
400C	-	1.5SMC400CA	TVS	Vrwm=342.0V, Vbr=342..380V, Ipp=2.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
400C	-	1.5SMC400CA	TVS	Vrwm=342.0V, Vbr=342..380V, Ipp=2.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Fee
400C	-	1.5SMC400CA	TVS	Vrwm=342.0V, Vbr=342..380V, Ipp=2.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
400C	-	P4SMA400C	TVS	Vbr=360..440V, Vrwm=324V, 0.70A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
400C	-	SMAJP4KE400CA	TVS	Vrwm=342.0V, Vbr=380.0..420.0V, Ipp=0.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
400C	-	SMBJP6KE400CA	TVS	Vrwm=342.0V, Vbr=380.0..420.0V, Ipp=1.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
400C	-	SMCJ1.5KE400CA	TVS	Vrwm=342.0V, Vbr=380.0..420.0V, Ipp=2.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
400C	-	TVP04A401CA-G	TVS	Vbr=380.0..420.0V, Vrwm=342.0V, Ipp=0.72A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
400C	-	TVP06B401ACA-G	TVS	Vrwm=342.0V, Vbr=380.0..420.0V, Ipp=1.09A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
400CA	-	P4SMA400CA	TVS	Vbr=380..420V, Vrwm=342V, 0.73A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
400CA	-	P6SMB400CA	TVS	Vbr=380..420V, Vrwm=342V, 1.10A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
4010	-	SZ4010	Zener diode	10V±10%, Izt=50.0mA, Zzt=3.5Ω, 2W	DO-214AC	1d	1a	Eic
4011	-	SZ4011	Zener diode	11V±10%, Izt=45.5mA, Zzt=4.0Ω, 2W	DO-214AC	1d	1a	Eic
4012	-	SZ4012	Zener diode	12V±10%, Izt=41.5mA, Zzt=4.5Ω, 2W	DO-214AC	1d	1a	Eic
4013	-	SZ4013	Zener diode	13V±10%, Izt=38.5mA, Zzt=5.0Ω, 2W	DO-214AC	1d	1a	Eic
4014	-	SZ4014	Zener diode	14V±10%, Izt=35.7mA, Zzt=5.5Ω, 2W	DO-214AC	1d	1a	Eic
4015	-	SZ4015	Zener diode	15V±10%, Izt=33.4mA, Zzt=7.0Ω, 2W	DO-214AC	1d	1a	Eic
4016	-	SZ4016	Zener diode	16V±10%, Izt=31.2mA, Zzt=8.0Ω, 2W	DO-214AC	1d	1a	Eic
4017	-	SZ4017	Zener diode	17V±10%, Izt=29.4mA, Zzt=9.0Ω, 2W	DO-214AC	1d	1a	Eic
4018	-	SZ4018	Zener diode	18V±10%, Izt=27.8mA, Zzt=10Ω, 2W	DO-214AC	1d	1a	Eic
4019	-	SZ4019	Zener diode	19V±10%, Izt=26.3mA, Zzt=11Ω, 2W	DO-214AC	1d	1a	Eic
4020	-	SZ4020	Zener diode	20V±10%, Izt=25.0mA, Zzt=11Ω, 2W	DO-214AC	1d	1a	Eic
4022	-	SZ4022	Zener diode	22V±10%, Izt=22.8mA, Zzt=12Ω, 2W	DO-214AC	1d	1a	Eic
4024	-	SZ4024	Zener diode	24V±10%, Izt=20.8mA, Zzt=13Ω, 2W	DO-214AC	1d	1a	Eic
4027	-	SZ4027	Zener diode	27V±10%, Izt=18.5mA, Zzt=18Ω, 2W	DO-214AC	1d	1a	Eic
4030	-	SZ4030	Zener diode	30V±10%, Izt=16.6mA, Zzt=20Ω, 2W	DO-214AC	1d	1a	Eic
4033	-	SZ4033	Zener diode	33V±10%, Izt=15.1mA, Zzt=23Ω, 2W	DO-214AC	1d	1a	Eic
4036	-	SZ4036	Zener diode	36V±10%, Izt=13.9mA, Zzt=25Ω, 2W	DO-214AC	1d	1a	Eic
4039	-	SZ4039	Zener diode	39V±10%, Izt=12.8mA, Zzt=30Ω, 2W	DO-214AC	1d	1a	Eic
403G	-	SZ403G	Zener diode	3.6V±10%, Izt=139mA, Zzt=5.0Ω, 2W	DO-214AC	1d	1a	Eic
403J	-	SZ403J	Zener diode	3.9V±10%, Izt=128mA, Zzt=5.0Ω, 2W	DO-214AC	1d	1a	Eic
4043	-	SZ4043	Zener diode	43V±10%, Izt=11.6mA, Zzt=35Ω, 2W	DO-214AC	1d	1a	Eic
4047	-	SZ4047	Zener diode	47V±10%, Izt=10.6mA, Zzt=40Ω, 2W	DO-214AC	1d	1a	Eic
404D	-	SZ404D	Zener diode	4.3V±10%, Izt=116mA, Zzt=4.5Ω, 2W	DO-214AC	1d	1a	Eic
404H	-	SZ404H	Zener diode	4.7V±10%, Izt=106mA, Zzt=4.5Ω, 2W	DO-214AC	1d	1a	Eic
4051	-	SZ4051	Zener diode	51V±10%, Izt=9.8mA, Zzt=48Ω, 2W	DO-214AC	1d	1a	Eic
4056	-	SZ4056	Zener diode	56V±10%, Izt=9.0mA, Zzt=55Ω, 2W	DO-214AC	1d	1a	Eic
405B	-	SZ405B	Zener diode	5.1V±10%, Izt=98.0mA, Zzt=3.5Ω, 2W	DO-214AC	1d	1a	Eic
405G	-	SZ405G	Zener diode	5.6V±10%, Izt=89.5mA, Zzt=2.5Ω, 2W	DO-214AC	1d	1a	Eic
4062	-	SZ4062	Zener diode	62V±10%, Izt=8.1mA, Zzt=60Ω, 2W	DO-214AC	1d	1a	Eic
4068	-	SZ4068	Zener diode	68V±10%, Izt=7.4mA, Zzt=75Ω, 2W	DO-214AC	1d	1a	Eic
406C	-	SZ406C	Zener diode	6.2V±10%, Izt=80.5mA, Zzt=1.5Ω, 2W	DO-214AC	1d	1a	Eic
406I	-	SZ406I	Zener diode	6.8V±10%, Izt=73.5mA, Zzt=2.0Ω, 2W	DO-214AC	1d	1a	Eic
4075	-	SZ4075	Zener diode	75V±10%, Izt=6.7mA, Zzt=90Ω, 2W	DO-214AC	1d	1a	Eic
407F	-	SZ407F	Zener diode	7.5V±10%, Izt=66.5mA, Zzt=2.0Ω, 2W	DO-214AC	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
4082	-	SZ4082	Zener diode	82V±10%, Izt=6.1mA, Zzt=100Ω, 2W	DO-214AC	1d	1a	Eic
408C	-	SZ408C	Zener diode	8.2V±10%, Izt=61.0mA, Zzt=2.3Ω, 2W	DO-214AC	1d	1a	Eic
4091	-	SZ4091	Zener diode	91V±10%, Izt=5.5mA, Zzt=125Ω, 2W	DO-214AC	1d	1a	Eic
409B	-	SZ409B	Zener diode	9.1V±10%, Izt=55.0mA, Zzt=2.5Ω, 2W	DO-214AC	1d	1a	Eic
40A	-	1SMC40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, 23.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
40A	-	MMF40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, Ipp=3.1A, 200W(1ms)	SOD-123FL	7d	2m	Sst
40A	-	SMAJ40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, 6.2A, 400W(1ms)	DO-214AC	1d	1a	Sus
40A	-	SMBG40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms)	DO-215AA	5d	1a	Msc
40A	-	SMBJ40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms)	DO-214AA	1d	1a	Sus
40A	-	SMCJ40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, 21A, 1500W(1ms)	DO-214AB	1d	1k	Sus
40A	-	SMF40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, Ipp=3.1A, 200W(1ms)	SOD-123FL	7d	1a	Mco
40A	-	UMA40A	TVS	Vrwm=40V, Vbr=44.4..64.5V, 7.8A, 500W(1ms)	UltraMite	14d	1v	Msc
40B	-	MMHZ5240BPT	Zener diode	9.500..10.50V, Izt=5mA, Zzt=15Ω, 225mW	SOD-123	5d	1a	Chm
40B	-	SMAJ5940B	Zener diode	43V±5%, Izt=8.7mA, Zzt=53.0Ω, 1.5W	DO-214AC	1d	1a	Mco
40B0	-	SZ40B0	Zener diode	100V±10%, Izt=5.0mA, Zzt=175Ω, 2W	DO-214AC	1d	1a	Eic
40B1	-	SZ40B1	Zener diode	110V±10%, Izt=4.5mA, Zzt=250Ω, 2W	DO-214AC	1d	1a	Eic
40B2	-	SZ40B2	Zener diode	120V±10%, Izt=4.2mA, Zzt=325Ω, 2W	DO-214AC	1d	1a	Eic
40B3	-	SZ40B3	Zener diode	130V±10%, Izt=3.8mA, Zzt=400Ω, 2W	DO-214AC	1d	1a	Eic
40B4	-	SZ40B4	Zener diode	140V±10%, Izt=3.6mA, Zzt=500Ω, 2W	DO-214AC	1d	1a	Eic
40B5	-	SZ40B5	Zener diode	150V±10%, Izt=3.3mA, Zzt=575Ω, 2W	DO-214AC	1d	1a	Eic
40B6	-	SZ40B6	Zener diode	160V±10%, Izt=3.1mA, Zzt=650Ω, 2W	DO-214AC	1d	1a	Eic
40B7	-	SZ40B7	Zener diode	170V±10%, Izt=2.9mA, Zzt=675Ω, 2W	DO-214AC	1d	1a	Eic
40B8	-	SZ40B8	Zener diode	180V±10%, Izt=2.8mA, Zzt=725Ω, 2W	DO-214AC	1d	1a	Eic
40B9	-	SZ40B9	Zener diode	190V±10%, Izt=2.6mA, Zzt=825Ω, 2W	DO-214AC	1d	1a	Eic
40C	-	SMBG40C	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
40CA	-	1SMC40CA	TVS	Vbr=44.4..49.1V, Vrwm=40V, 23.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
40CA	-	MMF40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, Ipp=3.1A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
40CA	-	SMAJ40CA	TVS	Vrwm=40V, Vbr=44.4..49.1V, 6.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
40CA	-	SMBG40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
40CA	-	SMBJ40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
40CA	-	SMCJ40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, 21A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
40CA	-	SMF40CA	TVS	Vbr=44.4..49.1V, Vrwm=40V, Ipp=3.1A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
40CA	-	UMA40CA	TVS	Vrwm=40V, Vbr=44.4..64.5V, 7.8A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
40D0	-	SZ40D0	Zener diode	200V±10%, Izt=2.5mA, Zzt=900Ω, 2W	DO-214AC	1d	1a	Eic
40L	-	SS1040L	Si-diode	SBR, 40V, 1A, Vf<0.45V(1A)	SOD-123	5d	1a	Pjt
40S	-	MMHZ5240SPT	Zener diode	9.800..10.20V, Izt=5mA, Zzt=15Ω, 225mW	SOD-123	5d	1a	Chm
40V	-	SMA40	TVS	Vbr=44.4..54.3V, Vrwm=40.0V, 4.2A, 300W(1ms)	DO-214AC	1d	1a	Mic
40V	-	SMB40	TVS	Vbr=44.4..54.3V, Vrwm=40V, 8.4A, 600W(1ms)	DO-214AA	1d	1a	Mic
40V	-	SMC40	TVS	Vbr=44.4..54.3V, Vrwm=40V, 21A, 1500W(1ms)	DO-214AB	1d	1a	Mic
40VA	-	SMA40A	TVS	Vbr=44.4..49.1V, Vrwm=40.0V, 4.7A, 300W(1ms)	DO-214AC	1d	1a	Mic
40VA	-	SMB40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, 9.3A, 600W(1ms)	DO-214AA	1d	1a	Mic
40VA	-	SMC40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, 23.3A, 1500W(1ms),	DO-214AB	1d	1a	Mic
40VC	-	SMA40C	TVS	Vbr=44.4..54.3V, Vrwm=40.0V, 4.2A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
40VC	-	SMB40C	TVS	Vbr=44.4..54.3V, Vrwm=40V, 8.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
40VC	-	SMC40C	TVS	Vbr=44.4..54.3V, Vrwm=40V, 21A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
40VCA	-	SMA40CA	TVS	Vbr=44.4..49.1V, Vrwm=40.0V, 4.7A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
40VCA	-	SMB40CA	TVS	Vbr=44.4..49.1V, Vrwm=40V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
40VCA	-	SMC40CA	TVS	Vbr=44.4..49.1V, Vrwm=40V, 23.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
41	-	HMSZ5241B	Zener diode	11V±5%, Izt=20mA, Zzt=22Ω, 225mW	SOD-323	5d	1d	Hsn
41	-	ZD5241BS2	Zener diode	11V±5%, 20mA, Zzt=22Ω, 500mW	SOD-323	5d	1a	Cys
41B	-	1PMT5941B	Zener diode	47V±5%, Izt=31mA, 2.5W	DO-216AA	4d	1g	Ons
41B	-	MMHZ5241BPT	Zener diode	10.45..11.55V, Izt=5mA, Zzt=18Ω, 225mW	SOD-123	5d	1a	Chm
41B	-	SMAJ5941B	Zener diode	47V±5%, Izt=8.0mA, Zzt=67.0Ω, 1.5W	DO-214AC	1d	1a	Mco
41S	-	MMHZ5241SPT	Zener diode	10.78..11.22V, Izt=5mA, Zzt=18Ω, 225mW	SOD-123	5d	1a	Chm
42	-	FDZ3.0VT	Zener diode	3.010..3.220V, Izt=5mA, Zzt=120Ω, 200mW	SOD-323	5d	1a	Fis
42	-	GDZ3V0B-V	Zener diode	3.01..3.22V, Izt=5mA, Zzt=120Ω, 200mW	SOD-323	5d	2m	Vs
42	-	HMSZ5242B	Zener diode	12V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOD-323	5d	1d	Hsn
42	-	LBZT52B3V0T1G	Zener diode	3.01..3.22V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
42	-	LEDZ3.0BT1G	Zener diode	3.01..3.22V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
42	-	LUDZS3.0BT1G	Zener diode	3.01..3.22V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
42	-	UDZS3.0B	Zener diode	3.01..3.22V, Izt=5mA, Zzt=120Ω, 200mW	SOD-323	5d	1a	Wtr
42	-	ZD5242BS2	Zener diode	12V±5%, 20mA, Zzt=30Ω, 500mW	SOD-323	5d	1a	Cys
42B	-	MMHZ5242BPT	Zener diode	11.40..12.60V, Izt=5mA, Zzt=22Ω, 225mW	SOD-123	5d	1a	Chm
42B	-	SMAJ5942B	Zener diode	51V±5%, Izt=7.3mA, Zzt=70.0Ω, 1.5W	DO-214AC	1d	1a	Mco
42B	-	SMC5342B	Zener diode	6.8V±5%, Zzt=1.0(175.0mA), Izm=700.0mA, 5W	DO-214AB	1d	1a	Ers
42S	-	MMHZ5242SPT	Zener diode	11.76..12.24V, Izt=5mA, Zzt=22Ω, 225mW	SOD-123	5d	1a	Chm
43	-	BAS40WX	Si-diode	SBD, 40V, 200mA, Vf<1V(40mA), 5pF	SOD-323	5d	1a	Mco
43	-	CDZ55C43	Zener diode	40.85..45.15V, Zzt=90Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
43	-	CDZ55C43S	Zener diode	40.85..45.15V, Zzt=90Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
43	-	CDZ55C43T	Zener diode	40.85..45.15V, Zzt=90Ω, Izt=5mA, 200mW	0603	70d	2d	Crp

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
43	-	CMZ43	Zener diode	43V±5%, Izt=7mA, 2W	M-FLAT	7d	1a	Tos
43	-	CZRNC55C43-G	Zener diode	40.85..45.15V, Zt=90Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
43	-	HMSZ5243B	Zener diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 225mW	SOD-323	5d	1d	Hsn
43	-	HZC4.3	Zener diode	4.3V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
43	-	KDZ4.3EV	Zener diode	4..4.5V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
43	-	KDZ4.3V	Zener diode	4..4.5V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
43	-	MAZY430	Zener diode	38.7..47.3V, Zzt=65Ω(5mA), 1W	NMiniP2	1d	1a	Pan
43	-	MMPZ5260SPT	Zener diode	42.14..43.86V, Izt=3.0mA, Zzt=93Ω, 225mW	SOD-323	5d	1a	Chm
43	-	P4SMA43	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 6.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
43	-	P6SMBJ43	TVS	Vrwm=43V, Vbr=38.7..47.3V, 9.6A, 600W(1ms)	DO-214AA	1d	1n	Lif
43	-	SMBG43	TVS	Vrwm=43V, Vbr=47.8..60.5V, 7.8A, 600W(1ms)	DO-215AA	5d	1a	Msc
43	-	SML4755	Zener diode	43V±5%, Izt=6mA, Zzt=70Ω, 1W	DO-214AC	1d	1k	Vs
43	-	TZD4.3WS	Zener diode	4.0..4.50V, Izt=5mA, Zzt=130Ω, 200mW	SOD-323	5d	1a	Ttr
43	-	TZD4.3WT	Zener diode	4.0..4.50V, Izt=5mA, Zzt=130Ω, 150mW	SOD-523	6d	1a	Ttr
43	-	U1ZB43	Zener diode	38.7..47.3V, Izt=7mA, 1W	3-4D1A	1d	2fa	Tos
43	-	USFZ4.3V	Zener diode	4.3V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
43	-	ZD5243BS2	Zener diode	13V±5%, 9.5mA, Zzt=13Ω, 500mW	SOD-323	5d	1a	Cys
43	ay	CRZ43	Zener diode	38.7..47.3V, Izt=7mA, 700mW	S-FLAT	6d	1a	Tos
4-3	-	MAZ80430M	Zener diode	4.17..4.40V, Zzt=130Ω(5mA), 150mW	SC-76	6d	1a	Pan
4-3	-	MAZ8043GML	Zener diode	4.17..4.40V, Zzt=130Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
43•	-	TZD4.3YWS	Zener diode	4.17..4.43V, Izt=5mA, Zzt=130Ω, 200mW	SOD-323	5d	1a	Ttr
43•	-	TZD4.3YWT	Zener diode	4.17..4.43V, Izt=5mA, Zzt=130Ω, 150mW	SOD-523	6d	1a	Ttr
43A	-	1.5SMC43A	TVS	Vrwm=36.8V, Vbr=40.9..45.2V, Ipp=25.3A, 1500W(1ms)	DO-214AB	1d	2s	Lif
43A	-	1.5SMC43A	TVS	Vrwm=36.8V, Vbr=40.9..45.2V, Ipp=25.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
43A	-	1.5SMC43A	TVS	Vrwm=36.8V, Vbr=40.9..45.2V, Ipp=25.3A, 1500W(1ms)	403	3d	2t	Ons
43A	-	1.5SMC43A	TVS	Vrwm=36.8V, Vbr=40.9..45.2V, Ipp=25.3A, 1500W(1ms)	DO-214AB	1d	1b	Mde
43A	-	1SMC43A	TVS	Vbr=47.8..52.8V, Vrwm=43V, 21.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
43A	-	MMF43A	TVS	Vrwm=43V, Vbr=47.8..54.9V, Ipp=2.9A, 200W(1ms)	SOD-123FL	7d	2m	Sst
43A	-	P4SMA43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 400W(1ms)	DO-214AC	1d	1a	Eic
43A	-	P4SMA43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 400W(1ms)	DO-214AC	1d	1k	Vs
43A	-	P6SMB43A	TVS	Vrwm=43V, Vbr=40.9..45.2V, 10.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
43A	-	P6SMB43A	TVS	Vrwm=43V, Vbr=40.9..45.2V, 10.1A, 600W(1ms)	403A	3d	1s	Ons
43A	-	P6SMBJ43A	TVS	Vrwm=43V, Vbr=38.7..47.3V, 10.1A, 600W(1ms)	DO-214AA	1d	1n	Lif
43A	-	SMAJ43A	TVS	Vrwm=43V, Vbr=47.8..52.8V, 5.7A, 400W(1ms)	DO-214AC	1d	1a	Sus
43A	-	SMAJP4KE43A	TVS	Vrwm=36.80V, Vbr=40.90..45.20V, Ipp=6.9A, 400W(1ms)	DO-214AC	1d	1a	Mco
43A	-	SMBG43A	TVS	Vrwm=43V, Vbr=47.8..54.9V, 8.6A, 600W(1ms)	DO-215AA	5d	1a	Msc
43A	-	SMBJ43A	TVS	Vrwm=43V, Vbr=47.8..54.9V, 8.6A, 600W(1ms)	DO-214AA	1d	1a	Sus
43A	-	SMBJP6KE43A	TVS	Vrwm=36.80V, Vbr=40.90..45.20V, Ipp=10.3A, 600W(1ms)	DO-214AA	1d	1a	Mco
43A	-	SMCJ1.5KE43A	TVS	Vrwm=36.80V, Vbr=40.90..45.20V, Ipp=25.6A, 1500W(1ms)	DO-214AB	1d	1a	Mco
43A	-	SMCJ43A	TVS	Vrwm=43V, Vbr=47.8..54.9V, 19.6A, 1500W(1ms)	DO-214AB	1d	1k	Sus
43A	-	SMF43A	TVS	Vbr=47.8..52.8V, Vrwm=43V, Ipp=2.9A, 200W(1ms)	SOD-123FL	7d	1a	Mco
43A	-	SZP6SMB43A	TVS	Vrwm=43V, Vbr=40.9..45.2V, 10.1A, 600W(1ms)	403A	3d	1s	Ons
43A	-	TVP04A430A-G	TVS	Vbr=40.85..45.15V, Vrwm=36.8V, Ipp=6.75A, 400W(1ms)	DO-214AC	1d	2o	Cmc
43A	-	TVP06B43A-G	TVS	Vrwm=36.8V, Vbr=40.85..45.15V, Ipp=10.12A, 600W(1ms)	DO-214AA	1d	2o	Cmc
43A	-	UMA43A	TVS	Vrwm=43V, Vbr=47.8..69.4V, 7.2A, 500W(1ms)	UltraMite	14d	1v	Msc
43AP	-	15TPSMC43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 25.6A, 1500W(1ms)	DO-214AB	1d	1p	Lif
43AP	-	4TPSMA43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 6.9A, 400W(1ms)	DO-214AC	1d	1p	Lif
43AP	-	6TPSMB43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 10.3A, 600W(1ms)	DO-214AA	1d	1p	Lif
43B	-	1SMB3EZ43	Zener diode	43V±5%, Zzt=35Ω, Izt=17.0mA, 3W	DO-214AA	1d	1a	Pjt
43B	-	MMHZ5243BPT	Zener diode	12.35..13.65V, Izt=5mA, Zzt=25Ω, 225mW	SOD-123	5d	1a	Chm
43B	-	SMC5343B	Zener diode	7.5V±5%, Zzt=1.5(175.0mA), Izm=630.0mA, 5W	DO-214AB	1d	1a	Ers
43B	-	Z3SMB43B	Zener diode	40.85..45.15V, Izt=17mA, Zzt=33Ω, 3W	DO-214AA	1d	1a	Ttr
43C	-	1.5SMC43CA	TVS	Vrwm=36.8V, Vbr=40.9..45.2V, Ipp=25.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
43C	-	1.5SMC43CA	TVS	Vrwm=36.8V, Vbr=40.9..45.2V, Ipp=25.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
43C	-	1.5SMC43CA	TVS	Vrwm=36.8V, Vbr=40.9..45.2V, Ipp=25.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
43C	-	P4SMA43C	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 6.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
43C	-	P4SMA43CA	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
43C	-	P6SMB43CA	TVS	Vrwm=43V, Vbr=40.9..45.2V, 10.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
43C	-	P6SMBJ43C	TVS	Vrwm=43V, Vbr=38.7..47.3V, 9.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
43C	-	SMAJP4KE43CA	TVS	Vrwm=36.80V, Vbr=40.90..45.20V, Ipp=6.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
43C	-	SMBG43C	TVS	Vrwm=43V, Vbr=47.8..60.5V, 7.8A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
43C	-	SMBJP6KE43CA	TVS	Vrwm=36.80V, Vbr=40.90..45.20V, Ipp=10.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
43C	-	SMCJ1.5KE43CA	TVS	Vrwm=36.80V, Vbr=40.90..45.20V, Ipp=25.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
43C	-	TVP04A430CA-G	TVS	Vbr=40.85..45.15V, Vrwm=36.8V, Ipp=6.75A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
43C	-	TVP06B43ACA-G	TVS	Vrwm=36.8V, Vbr=40.85..45.15V, Ipp=10.12A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
43CA	-	1SMC43CA	TVS	Vbr=47.8..52.8V, Vrwm=43V, 21.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
43CA	-	MMF43CA	TVS	Vrwm=43V, Vbr=47.8..54.9V, Ipp=2.9A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
43CA	-	P4SMA43CA	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
43CA	-	P6SMB43CA	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 10.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
43CA	-	P6SMBJ43CA	TVS	Vrwm=43V, Vbr=38.7..47.3V, 10.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
43CA	-	SMAJ43CA	TVS	Vrwm=43V, Vbr=47.8..52.8V, 5.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
43CA	-	SMBG43CA	TVS	Vrwm=43V, Vbr=47.8..54.9V, 8.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
43CA	-	SMBJ43CA	TVS	Vrwm=43V, Vbr=47.8..54.9V, 8.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
43CA	-	SMCJ43CA	TVS	Vrwm=43V, Vbr=47.8..54.9V, 19.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
43CA	-	SMF43CA	TVS	Vbr=47.8..52.8V, Vrwm=43V, Ipp=2.9A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
43CA	-	UMA43CA	TVS	Vrwm=43V, Vbr=47.8..69.4V, 7.2A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
43CP	-	15TPSMC43CA	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 25.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
43CP	-	4TPSMA43CA	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 6.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1p	Lif
43CP	-	6TPSMB43CA	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 10.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
43L	-	SSB43L	Si-diode	SBR, 30V, 4A, Vf<0.49V(4A)	DO-214AA	1d	1k	Vs
43P	-	BZD27C43P	Zener diode	40.85..45.15V, Zzt=45Ω, Izt=10mA, 800mW	SOD-123FL	7d	1a	Pjt
43P	-	MFPZ43	Zener diode	40.85..45.15V, Izt=10mA, Zzt=45Ω, 800mW	SOD-123FL	7d	1a	Ttr
43S	-	MMHZ5243SPT	Zener diode	12.74..13.26V, Izt=5mA, Zzt=25Ω, 225mW	SOD-123	5d	1a	Chm
43V	-	SMA43	TVS	Vbr=47.8..58.4V, Vrwm=43.0V, 3.9A, 300W(1ms)	DO-214AC	1d	1a	Mic
43V	-	SMB43	TVS	Vbr=47.8..58.4V, Vrwm=43V, 7.8A, 600W(1ms)	DO-214AA	1d	1a	Mic
43V	-	SMC43	TVS	Vbr=47.8..58.4V, Vrwm=43V, 19.6A, 1500W(1ms),	DO-214AB	1d	1a	Mic
43VA	-	SMA43A	TVS	Vbr=47.8..52.8V, Vrwm=43.0V, 4.3A, 300W(1ms)	DO-214AC	1d	1a	Mic
43VA	-	SMB43A	TVS	Vbr=47.8..52.8V, Vrwm=43V, 8.6A, 600W(1ms)	DO-214AA	1d	1a	Mic
43VA	-	SMC43A	TVS	Vbr=47.8..52.8V, Vrwm=43V, 21.6A, 1500W(1ms),	DO-214AB	1d	1a	Mic
43VB	-	BZT52B43	Zener diode	42.14..43.86V, Izt=2mA, Zzt=150Ω, 500mW	SOD-123FL	7d	1a	Tsc
43VB	-	MMSZ43VBW	Zener diode	42.14..43.86V, Izt=2mA, Zzt=150Ω, 500mW	SOD-123FL	7d	1a	Tac
43VC	-	SMA43C	TVS	Vbr=47.8..58.4V, Vrwm=43.0V, 3.9A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
43VC	-	SMB43C	TVS	Vbr=47.8..58.4V, Vrwm=43V, 7.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
43VC	-	SMC43C	TVS	Vbr=47.8..58.4V, Vrwm=43V, 19.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
43VCA	-	SMA43CA	TVS	Vbr=47.8..52.8V, Vrwm=43.0V, 4.3A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
43VCA	-	SMB43CA	TVS	Vbr=47.8..52.8V, Vrwm=43V, 8.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
43VCA	-	SMC43CA	TVS	Vbr=47.8..52.8V, Vrwm=43V, 21.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
43VZ	-	BZT52C43	Zener diode	40.85..45.15V, Izt=2mA, Zzt=150Ω, 500mW	SOD-123FL	7d	1a	Tsc
43VZ	-	MMSZ43VCW	Zener diode	40.85..45.15V, Izt=2mA, Zzt=150Ω, 500mW	SOD-123FL	7d	1a	Tac
43VZ	-	TCMMSZ43V	Zener diode	43V±5%, Izt=5mA, Zzt=141Ω, 500mW	SOD-123FL	7d	1a	Tac
43VZ	-	ZGFM0543C-MH	Zener diode	40.85..45.15V, Izt=5mA, Zzt=141Ω, 500mW	SOD-123	5d	1a	Pic
44	-	CMDD4448	Si-diode	Sw, 75V, 250mA, 275mW, Vf<1V(100mA), <4pF	SOD-323	5d	1a	Cen
44	-	HMSZ5244B	Zener diode	14V±5%, Izt=9mA, Zzt=15Ω, 225mW	SOD-323	5d	1d	Hsn
44	-	ZD5244BS2	Zener diode	14V±5%, 9mA, Zzt=15Ω, 500mW	SOD-323	5d	1a	Cys
440	-	P4SMA440	TVS	Vbr=396..484V, Vrwm=356V, 0.95A, 400W(1ms)	DO-214AC	1d	1a	Eic
440A	-	1.5SMC440A	TVS	Vrwm=376.0V, Vbr=376..418V, Ipp=2.5A, 1500W(1ms)	DO-214AB	1d	2s	Lif
440A	-	1.5SMC440A	TVS	Vrwm=376.0V, Vbr=376..418V, Ipp=2.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
440A	-	1.5SMC440A	TVS	Vrwm=376.0V, Vbr=376..418V, Ipp=2.5A, 1500W(1ms)	DO-214AB	1d	1b	Mde
440A	-	P4SMA440A	TVS	Vbr=418..462V, Vrwm=376V, 1.0A, 400W(1ms)	DO-214AC	1d	1k	Vs
440A	-	P4SMA440A	TVS	Vbr=418..462V, Vrwm=376V, 1.0A, 400W(1ms)	DO-214AC	1ba	1j	Eic
440A	-	P4SMA440A	TVS	Vbr=418..462V, Vrwm=376V, 1.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
440A	-	P6SMB440A	TVS	Vbr=418..462V, Vrwm=376V, 1.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
440A	-	SMAJP4KE440A	TVS	Vrwm=376.0V, Vbr=418.0..462.0V, Ipp=0.7A, 400W(1ms)	DO-214AC	1d	1a	Mco
440A	-	SMBJP6KE440A	TVS	Vrwm=376.0V, Vbr=418.0..462.0V, Ipp=1.0A, 600W(1ms)	DO-214AA	1d	1a	Mco
440A	-	SMCJ1.5KE440A	TVS	Vrwm=376.0V, Vbr=418.0..462.0V, Ipp=2.5A, 1500W(1ms)	DO-214AB	1d	1a	Mco
440A	-	TVP04A441A-G	TVS	Vbr=418.0..462.0V, Vrwm=376.2V, Ipp=0.66A, 400W(1ms)	DO-214AC	1d	2o	Cmc
440A	-	TVP06B441A-G	TVS	Vrwm=376.2V, Vbr=418.0..462.0V, Ipp=0.99A, 600W(1ms)	DO-214AA	1d	2o	Cmc
440C	-	1.5SMC440CA	TVS	Vrwm=376.0V, Vbr=376..418V, Ipp=2.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
440C	-	1.5SMC440CA	TVS	Vrwm=376.0V, Vbr=376..418V, Ipp=2.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Fee
440C	-	1.5SMC440CA	TVS	Vrwm=376.0V, Vbr=376..418V, Ipp=2.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
440C	-	P4SMA440C	TVS	Vbr=396..484V, Vrwm=356V, 0.95A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
440C	-	SMAJP4KE440CA	TVS	Vrwm=376.0V, Vbr=418.0..462.0V, Ipp=0.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
440C	-	SMBJP6KE440CA	TVS	Vrwm=376.0V, Vbr=418.0..462.0V, Ipp=1.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
440C	-	SMCJ1.5KE440CA	TVS	Vrwm=376.0V, Vbr=418.0..462.0V, Ipp=2.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
440C	-	TVP04A441CA-G	TVS	Vbr=418.0..462.0V, Vrwm=376.2V, Ipp=0.66A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
440C	-	TVP06B441ACA-G	TVS	Vrwm=376.2V, Vbr=418.0..462.0V, Ipp=0.99A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
440CA	-	P4SMA440CA	TVS	Vbr=418..462V, Vrwm=376V, 1.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
440CA	-	P6SMB440CA	TVS	Vbr=418..462V, Vrwm=376V, 1.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
44B	-	MMHZ5244BPT	Zener diode	13.30..14.70V, Izt=5mA, Zzt=25Ω, 225mW	SOD-123	5d	1a	Chm
44B	-	SMC5344B	Zener diode	8.2V±5%, Zzt=1.5(150.0mA), Izm=580.0mA, 5W	DO-214AB	1d	1a	Ers
44S	-	MMHZ5244SPT	Zener diode	13.72..14.28V, Izt=5mA, Zzt=25Ω, 225mW	SOD-123	5d	1a	Chm
45	-	BZX584B3V6	Zener diode	3.53..3.67V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523FL	7d	1a	Tac
45	-	EDZ15B	Zener diode	14.34..14.98V, Izt=5mA, Zzt=42Ω, 150mW	SOD-523	6d	1a	Rhm
45	-	EDZV15B	Zener diode	14.34..14.98V, Izt=5.0mA, Zzt=42Ω, 150mW	SOD-523	6d	2v	Rhm
45	-	FDZ15EV	Zener diode	14.340..14.980V, Izt=5mA, Zzt=42Ω, 150mW	SOD-523	6d	1a	Fis
45	-	FDZ15VT	Zener diode	14.340..14.980V, Izt=5mA, Zzt=42Ω, 200mW	SOD-323	5d	1a	Fis
45	-	GDZ3V0B-V-G	Zener diode	3.01..3.22V, Izt=5mA, Zzt=120Ω, 200mW	SOD-323	5d	2m	Vs
45	-	HMSZ5245B	Zener diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 225mW	SOD-323	5d	1d	Hsn
45	-	LBZT52B15T1G	Zener diode	14.34..14.98V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
45	-	LEDZ15BT1G	Zener diode	14.34..14.98V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
45	-	LUDZS15BT1G	Zener diode	14.34..14.98V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
45	-	MM5Z3V6B	Zener diode	3.53..3.67V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523FL	7d	1a	Tac
45	-	SMBG45	TVS	Vrwm=45V, Vbr=50.0..63.3V, 7.5A, 600W(1ms)	DO-215AA	5d	1a	Msc
45	-	TDZ15B	Zener diode	15V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
45	-	UDZS15B	Zener diode	14.34..14.98V, Izt=5mA, Zzt=42Ω, 200mW	SOD-323	5d	1a	Wtr
45	-	UDZS15B	Zener diode	15V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
45	-	UDZV15B	Zener diode	14.34..14.98V, Izt=5.0mA, Zzt=42Ω, 200mW	SOD-323	5d	2v	Rhm
45	-	VDZS15B	Zener diode	15V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
45	-	ZD5245BS2	Zener diode	15V±5%, 8.5mA, Zzt=16Ω, 500mW	SOD-323	5d	1a	Cys
4510	-	SZ4510	Zener diode	10V±5%, Izt=50.0mA, Zzt=3.5Ω, 2W	DO-214AC	1d	1a	Eic
4511	-	SZ4511	Zener diode	11V±5%, Izt=45.5mA, Zzt=4.0Ω, 2W	DO-214AC	1d	1a	Eic
4512	-	SZ4512	Zener diode	12V±5%, Izt=41.5mA, Zzt=4.5Ω, 2W	DO-214AC	1d	1a	Eic
4513	-	SZ4513	Zener diode	13V±5%, Izt=38.5mA, Zzt=5.0Ω, 2W	DO-214AC	1d	1a	Eic
4514	-	SZ4514	Zener diode	14V±5%, Izt=35.7mA, Zzt=5.5Ω, 2W	DO-214AC	1d	1a	Eic
4515	-	SZ4515	Zener diode	15V±5%, Izt=33.4mA, Zzt=7.0Ω, 2W	DO-214AC	1d	1a	Eic
4516	-	SZ4516	Zener diode	16V±5%, Izt=31.2mA, Zzt=8.0Ω, 2W	DO-214AC	1d	1a	Eic
4517	-	SZ4517	Zener diode	17V±5%, Izt=29.4mA, Zzt=9.0Ω, 2W	DO-214AC	1d	1a	Eic
4518	-	SZ4518	Zener diode	18V±5%, Izt=27.8mA, Zzt=10Ω, 2W	DO-214AC	1d	1a	Eic
4519	-	SZ4519	Zener diode	19V±5%, Izt=26.3mA, Zzt=11Ω, 2W	DO-214AC	1d	1a	Eic
4520	-	SZ4520	Zener diode	20V±5%, Izt=25.0mA, Zzt=11Ω, 2W	DO-214AC	1d	1a	Eic
4522	-	SZ4522	Zener diode	22V±5%, Izt=22.8mA, Zzt=12Ω, 2W	DO-214AC	1d	1a	Eic
4524	-	SZ4524	Zener diode	24V±5%, Izt=20.8mA, Zzt=13Ω, 2W	DO-214AC	1d	1a	Eic
4527	-	SZ4527	Zener diode	27V±5%, Izt=18.5mA, Zzt=18Ω, 2W	DO-214AC	1d	1a	Eic
452H	-	SZ452H	Zener diode	2.7V±5%, Izt=80mA, Zzt=10Ω, 2W	DO-214AC	1d	1a	Eic
4530	-	SZ4530	Zener diode	30V±5%, Izt=16.6mA, Zzt=20Ω, 2W	DO-214AC	1d	1a	Eic
4533	-	SZ4533	Zener diode	33V±5%, Izt=15.1mA, Zzt=23Ω, 2W	DO-214AC	1d	1a	Eic
4536	-	SZ4536	Zener diode	36V±5%, Izt=13.9mA, Zzt=25Ω, 2W	DO-214AC	1d	1a	Eic
4539	-	SZ4539	Zener diode	39V±5%, Izt=12.8mA, Zzt=30Ω, 2W	DO-214AC	1d	1a	Eic
453A	-	SZ453A	Zener diode	3.0V±5%, Izt=160mA, Zzt=8.0Ω, 2W	DO-214AC	1d	1a	Eic
453D	-	SZ453D	Zener diode	3.3V±5%, Izt=145mA, Zzt=8.0Ω, 2W	DO-214AC	1d	1a	Eic
453G	-	SZ453G	Zener diode	3.6V±5%, Izt=139mA, Zzt=5.0Ω, 2W	DO-214AC	1d	1a	Eic
453J	-	SZ453J	Zener diode	3.9V±5%, Izt=128mA, Zzt=5.0Ω, 2W	DO-214AC	1d	1a	Eic
4543	-	SZ4543	Zener diode	43V±5%, Izt=11.6mA, Zzt=35Ω, 2W	DO-214AC	1d	1a	Eic
4547	-	SZ4547	Zener diode	47V±5%, Izt=10.6mA, Zzt=40Ω, 2W	DO-214AC	1d	1a	Eic
454D	-	SZ454D	Zener diode	4.3V±5%, Izt=116mA, Zzt=4.5Ω, 2W	DO-214AC	1d	1a	Eic
454H	-	SZ454H	Zener diode	4.7V±5%, Izt=106mA, Zzt=4.5Ω, 2W	DO-214AC	1d	1a	Eic
4551	-	SZ4551	Zener diode	51V±5%, Izt=9.8mA, Zzt=48Ω, 2W	DO-214AC	1d	1a	Eic
4556	-	SZ4556	Zener diode	56V±5%, Izt=9.0mA, Zzt=55Ω, 2W	DO-214AC	1d	1a	Eic
455B	-	SZ455B	Zener diode	5.1V±5%, Izt=98.0mA, Zzt=3.5Ω, 2W	DO-214AC	1d	1a	Eic
455G	-	SZ455G	Zener diode	5.6V±5%, Izt=89.5mA, Zzt=2.5Ω, 2W	DO-214AC	1d	1a	Eic
4562	-	SZ4562	Zener diode	62V±5%, Izt=8.1mA, Zzt=60Ω, 2W	DO-214AC	1d	1a	Eic
4568	-	SZ4568	Zener diode	68V±5%, Izt=7.4mA, Zzt=75Ω, 2W	DO-214AC	1d	1a	Eic
456C	-	SZ456C	Zener diode	6.2V±5%, Izt=80.5mA, Zzt=1.5Ω, 2W	DO-214AC	1d	1a	Eic
456I	-	SZ456I	Zener diode	6.8V±5%, Izt=73.5mA, Zzt=2.0Ω, 2W	DO-214AC	1d	1a	Eic
4575	-	SZ4575	Zener diode	75V±5%, Izt=6.7mA, Zzt=90Ω, 2W	DO-214AC	1d	1a	Eic
457F	-	SZ457F	Zener diode	7.5V±5%, Izt=66.5mA, Zzt=2.0Ω, 2W	DO-214AC	1d	1a	Eic
4582	-	SZ4582	Zener diode	82V±5%, Izt=6.1mA, Zzt=100Ω, 2W	DO-214AC	1d	1a	Eic
458C	-	SZ458C	Zener diode	8.2V±5%, Izt=61.0mA, Zzt=2.3Ω, 2W	DO-214AC	1d	1a	Eic
4591	-	SZ4591	Zener diode	91V±5%, Izt=5.5mA, Zzt=125Ω, 2W	DO-214AC	1d	1a	Eic
459B	-	SZ459B	Zener diode	9.1V±5%, Izt=55.0mA, Zzt=2.5Ω, 2W	DO-214AC	1d	1a	Eic
45A	-	1SMC45A	TVS	Vbr=50.0..55.3V, Vrwm=45V, 20.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
45A	-	MMF45A	TVS	Vrwm=45V, Vbr=50.0..57.5V, Ipp=2.8A, 200W(1ms)	SOD-123FL	7d	2m	Sst
45A	-	SMAJ45A	TVS	Vrwm=45V, Vbr=50.0..55.3V, 5.5A, 400W(1ms)	DO-214AC	1d	1a	Sus
45A	-	SMBG45A	TVS	Vrwm=45V, Vbr=50.0..57.5V, 8.3A, 600W(1ms)	DO-215AA	5d	1a	Msc
45A	-	SMBJ45A	TVS	Vrwm=45V, Vbr=50.0..57.5V, 8.3A, 600W(1ms)	DO-214AA	1d	1a	Sus
45A	-	SMCJ45A	TVS	Vrwm=45V, Vbr=50..57.5V, 18.7A, 1500W(1ms)	DO-214AB	1d	1k	Sus
45A	-	SMF45A	TVS	Vbr=50..55.3V, Vrwm=45V, Ipp=2.8A, 200W(1ms)	SOD-123FL	7d	1a	Mco
45A	-	UMA45A	TVS	Vrwm=45V, Vbr=50.0..72.7V, 6.9A, 500W(1ms)	UltraMite	14d	1v	Msc
45B	-	MMHZ5245BPT	Zener diode	14.25..15.75V, Izt=5mA, Zzt=32Ω, 225mW	SOD-123	5d	1a	Chm
45B	-	SMC5345B	Zener diode	8.7V±5%, Zzt=2.0(150.0mA), Izm=545.0mA, 5W	DO-214AB	1d	1a	Ers
45B0	-	SZ45B0	Zener diode	100V±5%, Izt=5.0mA, Zzt=175Ω, 2W	DO-214AC	1d	1a	Eic
45B1	-	SZ45B1	Zener diode	110V±5%, Izt=4.5mA, Zzt=250Ω, 2W	DO-214AC	1d	1a	Eic
45B2	-	SZ45B2	Zener diode	120V±5%, Izt=4.2mA, Zzt=325Ω, 2W	DO-214AC	1d	1a	Eic
45B3	-	SZ45B3	Zener diode	130V±5%, Izt=3.8mA, Zzt=400Ω, 2W	DO-214AC	1d	1a	Eic
45B4	-	SZ45B4	Zener diode	140V±5%, Izt=3.6mA, Zzt=500Ω, 2W	DO-214AC	1d	1a	Eic
45B5	-	SZ45B5	Zener diode	150V±5%, Izt=3.3mA, Zzt=575Ω, 2W	DO-214AC	1d	1a	Eic
45B6	-	SZ45B6	Zener diode	160V±5%, Izt=3.1mA, Zzt=650Ω, 2W	DO-214AC	1d	1a	Eic
45B7	-	SZ45B7	Zener diode	170V±5%, Izt=2.9mA, Zzt=675Ω, 2W	DO-214AC	1d	1a	Eic
45B8	-	SZ45B8	Zener diode	180V±5%, Izt=2.8mA, Zzt=725Ω, 2W	DO-214AC	1d	1a	Eic
45B9	-	SZ45B9	Zener diode	190V±5%, Izt=2.6mA, Zzt=825Ω, 2W	DO-214AC	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
45C	-	SMBG45C	TVS	Vrwm=45V, Vbr=50.0..63.3V, 7.5A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
45CA	-	1SMC45CA	TVS	Vbr=50.0..55.3V, Vrwm=45V, 20.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
45CA	-	MMF45CA	TVS	Vrwm=45V, Vbr=50.0..57.5V, Ipp=2.8A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
45CA	-	SMAJ45CA	TVS	Vrwm=45V, Vbr=50.0..55.3V, 5.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
45CA	-	SMBG45CA	TVS	Vrwm=45V, Vbr=50.0..57.5V, 8.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
45CA	-	SMBJ45CA	TVS	Vrwm=45V, Vbr=50.0..57.5V, 8.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
45CA	-	SMCJ45CA	TVS	Vrwm=45V, Vbr=50..57.5V, 18.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
45CA	-	SMF45CA	TVS	Vbr=50..55.3V, Vrwm=45V, Ipp=2.8A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
45CA	-	UMA45CA	TVS	Vrwm=45V, Vbr=50.0..72.7V, 6.9A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
45D0	-	SZ45D0	Zener diode	200V±5%, Izt=2.5mA, Zzt=900Ω, 2W	DO-214AC	1d	1a	Eic
45S	-	MMHZ5245SPT	Zener diode	14.70..15.30V, Izt=5mA, Zzt=32Ω, 225mW	SOD-123	5d	1a	Chm
45V	-	SMA45	TVS	Vbr=50..61.1V, Vrwm=43.0V, 3.7A, 300W(1ms)	DO-214AC	1d	1a	Mic
45V	-	SMB45	TVS	Vbr=50..61.1V, Vrwm=45V, 7.5A, 600W(1ms)	DO-214AA	1d	1a	Mic
45V	-	SMC45	TVS	Vbr=50..61.1V, Vrwm=45V, 18.7A, 1500W(1ms),	DO-214AB	1d	1a	Mic
45VA	-	SMA45A	TVS	Vbr=50..55.3V, Vrwm=45.0V, 4.1A, 300W(1ms)	DO-214AC	1d	1a	Mic
45VA	-	SMB45A	TVS	Vbr=50..55.3V, Vrwm=45V, 8.3A, 600W(1ms)	DO-214AA	1d	1a	Mic
45VA	-	SMC45A	TVS	Vbr=50..55.3V, Vrwm=45V, 20.6A, 1500W(1ms),	DO-214AB	1d	1a	Mic
45VC	-	SMA45C	TVS	Vbr=50..61.1V, Vrwm=43.0V, 3.7A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
45VC	-	SMB45C	TVS	Vbr=50..61.1V, Vrwm=45V, 7.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
45VC	-	SMC45C	TVS	Vbr=50..61.1V, Vrwm=45V, 18.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
45VCA	-	SMA45CA	TVS	Vbr=50..55.3V, Vrwm=45.0V, 4.1A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
45VCA	-	SMB45CA	TVS	Vbr=50..55.3V, Vrwm=45V, 8.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
45VCA	-	SMC45CA	TVS	Vbr=50..55.3V, Vrwm=45V, 20.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
46	-	BAT46J	Si-diode	SBD, 100V, 150mA, Vf<1V(250mA), 6pF	SOD-323	5d	1a	Ste
46	-	HMSZ5246B	Zener diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 225mW	SOD-323	5d	1d	Hsn
46	-	ZD5246BS2	Zener diode	16V±5%, 7.8mA, Zzt=17Ω, 500mW	SOD-323	5d	1a	Cys
46B	-	MMHZ5246BPT	Zener diode	15.20..16.80V, Izt=5mA, Zzt=36Ω, 225mW	SOD-123	5d	1a	Chm
46B	-	SMC5346B	Zener diode	9.1V±5%, Zzt=2.0(150.0mA), Izm=520.0mA, 5W	DO-214AB	1d	1a	Ers
46S	-	MMHZ5246SPT	Zener diode	15.68..16.32V, Izt=5mA, Zzt=36Ω, 225mW	SOD-123	5d	1a	Chm
47	-	CDZ55C47	Zener diode	44.65..49.35V, Zzt=110Ω, Izt=2.25mA, 500mW	1206	70d	2d	Crp
47	-	CDZ55C47S	Zener diode	44.65..49.35V, Zzt=110Ω, Izt=2.25mA, 500mW	0805	70d	2d	Crp
47	-	CDZ55C47T	Zener diode	44.65..49.35V, Zzt=110Ω, Izt=2.25mA, 200mW	0603	70d	2d	Crp
47	-	CMZ47	Zener diode	47V±5%, Izt=6mA, 2W	M-FLAT	7d	1a	Tos
47	-	CZRNC55C47-G	Zener diode	44.65..49.35V, Zt=110Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
47	-	HMSZ5247B	Zener diode	17V±5%, Izt=7.4mA, Zzt=19Ω, 225mW	SOD-323	5d	1d	Hsn
47	-	HZC4.7	Zener diode	4.7V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
47	-	KDZ4.7EV	Zener diode	4.4..4.9V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
47	-	KDZ4.7V	Zener diode	4.4..4.9V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
47	-	MAZY470	Zener diode	42.3..51.7V, Zzt=65Ω(5mA), 1W	NMiniP2	1d	1a	Pan
47	-	MMPZ5261SPT	Zener diode	46.06..47.94V, Izt=2.7mA, Zzt=105Ω, 225mW	SOD-323	5d	1a	Chm
47	-	P4SMA47	TVS	Vbr=42.3..51.7V, Vrwm=38.1V, 6.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
47	-	P6SMBJ47	TVS	Vrwm=47V, Vbr=42.3..51.7V, 8.9A, 600W(1ms)	DO-214AA	1d	1n	Lif
47	-	SML4756	Zener diode	47V±5%, Izt=5.5mA, Zzt=80Ω, 1W	DO-214AC	1d	1k	Vs
47	-	TZD4.7WS	Zener diode	4.40..4.90V, Izt=5mA, Zzt=120Ω, 200mW	SOD-323	5d	1a	Ttr
47	-	TZD4.7WT	Zener diode	4.40..4.90V, Izt=5mA, Zzt=120Ω, 150mW	SOD-523	6d	1a	Ttr
47	-	U1ZB47	Zener diode	42.3..51.7V, Izt=6mA, 1W	3-4D1A	1d	2fa	Tos
47	-	USFZ4.7V	Zener diode	4.7V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
47	-	ZD5247BS2	Zener diode	17V±5%, 7.4mA, Zzt=19Ω, 500mW	SOD-323	5d	1a	Cys
47	ay	CRZ47	Zener diode	42.3..51.7V, Izt=6mA, 700mW	S-FLAT	6d	1a	Tos
4-7	-	MAZ80470M	Zener diode	4.59..4.83V, Zzt=80Ω(5mA), 150mW	SC-76	6d	1a	Pan
4-7	-	MAZ8047GML	Zener diode	4.59..4.83V, Zzt=80Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
47•	-	TZD4.7YWS	Zener diode	4.55..4.75V, Izt=5mA, Zzt=120Ω, 200mW	SOD-323	5d	1a	Ttr
47•	-	TZD4.7YWT	Zener diode	4.55..4.75V, Izt=5mA, Zzt=120Ω, 150mW	SOD-523	6d	1a	Ttr
4728	-	SML4728	Zener diode	3.3V±10%, Izt=76mA, Zzt=10Ω, 1W	DO-214AC	1d	1a	Eic
4728A	-	SMA4728A	Zener diode	3.3V±5%, Izt=76mA, Zzt<10Ω, 1W	DO-214AC	1d	1t	Exc
4728A	-	SML4728A	Zener diode	3.3V±5%, Izt=76mA, Zzt=10Ω, 1W	DO-214AC	1d	1a	Eic
4729	-	SML4729	Zener diode	3.6V±10%, Izt=69mA, Zzt=10Ω, 1W	DO-214AC	1d	1a	Eic
4729A	-	SMA4729A	Zener diode	3.6V±5%, Izt=69mA, Zzt<10Ω, 1W	DO-214AC	1d	1t	Exc
4729A	-	SML4729A	Zener diode	3.6V±5%, Izt=69mA, Zzt=10Ω, 1W	DO-214AC	1d	1a	Eic
4730	-	SML4730	Zener diode	3.9V±10%, Izt=64mA, Zzt=9Ω, 1W	DO-214AC	1d	1a	Eic
4730A	-	SMA4730A	Zener diode	3.9V±5%, Izt=64mA, Zzt<9Ω, 1W	DO-214AC	1d	1t	Exc
4730A	-	SML4730A	Zener diode	3.9V±5%, Izt=64mA, Zzt=9Ω, 1W	DO-214AC	1d	1a	Eic
4731	-	SML4731	Zener diode	4.3V±10%, Izt=58mA, Zzt=9Ω, 1W	DO-214AC	1d	1a	Eic
4731A	-	SMA4731A	Zener diode	4.3V±5%, Izt=58mA, Zzt<9Ω, 1W	DO-214AC	1d	1t	Exc
4731A	-	SML4731A	Zener diode	4.3V±5%, Izt=58mA, Zzt=9Ω, 1W	DO-214AC	1d	1a	Eic
4732	-	SML4732	Zener diode	4.7V±10%, Izt=53mA, Zzt=8Ω, 1W	DO-214AC	1d	1a	Eic
4732A	-	SMA4732A	Zener diode	4.7V±5%, Izt=53mA, Zzt<8Ω, 1W	DO-214AC	1d	1t	Exc
4732A	-	SML4732A	Zener diode	4.7V±5%, Izt=53mA, Zzt=8Ω, 1W	DO-214AC	1d	1a	Eic
4733	-	SML4733	Zener diode	5.1V±10%, Izt=49mA, Zzt=7Ω, 1W	DO-214AC	1d	1a	Eic
4733A	-	SMA4733A	Zener diode	5.1V±5%, Izt=49mA, Zzt<7Ω, 1W	DO-214AC	1d	1t	Exc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
4733A	-	SML4733A	Zener diode	5.1V±5%, Izt=49mA, Zzt=7Ω, 1W	DO-214AC	1d	1a	Eic
4734	-	SML4734	Zener diode	5.6V±10%, Izt=45mA, Zzt=5Ω, 1W	DO-214AC	1d	1a	Eic
4734A	-	SMA4734A	Zener diode	5.6V±5%, Izt=45mA, Zzt<5Ω, 1W	DO-214AC	1d	1t	Exc
4734A	-	SML4734A	Zener diode	5.6V±5%, Izt=45mA, Zzt=5Ω, 1W	DO-214AC	1d	1a	Eic
4735	-	SML4735	Zener diode	6.2V±10%, Izt=41mA, Zzt=2Ω, 1W	DO-214AC	1d	1a	Eic
4735A	-	SMA4735A	Zener diode	6.2V±5%, Izt=41mA, Zzt<2Ω, 1W	DO-214AC	1d	1t	Exc
4735A	-	SML4735A	Zener diode	6.2V±5%, Izt=41mA, Zzt=2Ω, 1W	DO-214AC	1d	1a	Eic
4736	-	SML4736	Zener diode	6.8V±10%, Izt=37mA, Zzt=3.5Ω, 1W	DO-214AC	1d	1a	Eic
4736A	-	SMA4736A	Zener diode	6.8V±5%, Izt=37mA, Zzt<3.5Ω, 1W	DO-214AC	1d	1t	Exc
4736A	-	SML4736A	Zener diode	6.8V±5%, Izt=37mA, Zzt=3Ω, 1W	DO-214AC	1d	1a	Eic
4737	-	SML4737	Zener diode	7.5V±10%, Izt=34mA, Zzt=4Ω, 1W	DO-214AC	1d	1a	Eic
4737A	-	SMA4737A	Zener diode	7.5V±5%, Izt=34mA, Zzt<4Ω, 1W	DO-214AC	1d	1t	Exc
4737A	-	SML4737A	Zener diode	7.5V±5%, Izt=34mA, Zzt=4Ω, 1W	DO-214AC	1d	1a	Eic
4738	-	SML4738	Zener diode	8.2V±10%, Izt=31mA, Zzt=4.5Ω, 1W	DO-214AC	1d	1a	Eic
4738A	-	SMA4738A	Zener diode	8.2V±5%, Izt=31mA, Zzt<4.5Ω, 1W	DO-214AC	1d	1t	Exc
4738A	-	SML4738A	Zener diode	8.2V±5%, Izt=31mA, Zzt=4Ω, 1W	DO-214AC	1d	1a	Eic
4739	-	SML4739	Zener diode	9.1V±10%, Izt=28mA, Zzt=5Ω, 1W	DO-214AC	1d	1a	Eic
4739A	-	SMA4739A	Zener diode	9.1V±5%, Izt=28mA, Zzt<5Ω, 1W	DO-214AC	1d	1t	Exc
4739A	-	SML4739A	Zener diode	9.1V±5%, Izt=28mA, Zzt=5Ω, 1W	DO-214AC	1d	1a	Eic
4740	-	SML4740	Zener diode	10V±10%, Izt=25mA, Zzt=7Ω, 1W	DO-214AC	1d	1a	Eic
4740A	-	SMA4740A	Zener diode	10V±5%, Izt=25mA, Zzt<7Ω, 1W	DO-214AC	1d	1t	Exc
4740A	-	SML4740A	Zener diode	10V±5%, Izt=25mA, Zzt=7Ω, 1W	DO-214AC	1d	1a	Eic
4741	-	SML4741	Zener diode	11V±10%, Izt=23mA, Zzt=8Ω, 1W	DO-214AC	1d	1a	Eic
4741A	-	SMA4741A	Zener diode	11V±5%, Izt=23mA, Zzt<8Ω, 1W	DO-214AC	1d	1t	Exc
4741A	-	SML4741A	Zener diode	11V±5%, Izt=23mA, Zzt=8Ω, 1W	DO-214AC	1d	1a	Eic
4742	-	SML4742	Zener diode	12V±10%, Izt=21mA, Zzt=9Ω, 1W	DO-214AC	1d	1a	Eic
4742A	-	SMA4742A	Zener diode	12V±5%, Izt=21mA, Zzt<9Ω, 1W	DO-214AC	1d	1t	Exc
4742A	-	SML4742A	Zener diode	12V±5%, Izt=21mA, Zzt=9Ω, 1W	DO-214AC	1d	1a	Eic
4743	-	SML4743	Zener diode	13V±10%, Izt=19mA, Zzt=10Ω, 1W	DO-214AC	1d	1a	Eic
4743A	-	SMA4743A	Zener diode	13V±5%, Izt=19mA, Zzt<10Ω, 1W	DO-214AC	1d	1t	Exc
4743A	-	SML4743A	Zener diode	13V±5%, Izt=19mA, Zzt=10Ω, 1W	DO-214AC	1d	1a	Eic
4744	-	SML4744	Zener diode	15V±10%, Izt=17mA, Zzt=14Ω, 1W	DO-214AC	1d	1a	Eic
4744A	-	SMA4744A	Zener diode	15V±5%, Izt=17mA, Zzt<14Ω, 1W	DO-214AC	1d	1t	Exc
4744A	-	SML4744A	Zener diode	15V±5%, Izt=17mA, Zzt=14Ω, 1W	DO-214AC	1d	1a	Eic
4745	-	SML4745	Zener diode	16V±10%, Izt=15.5mA, Zzt=16Ω, 1W	DO-214AC	1d	1a	Eic
4745A	-	SMA4745A	Zener diode	16V±5%, Izt=15.5mA, Zzt<16Ω, 1W	DO-214AC	1d	1t	Exc
4745A	-	SML4745A	Zener diode	16V±5%, Izt=15mA, Zzt=16Ω, 1W	DO-214AC	1d	1a	Eic
4746	-	SML4746	Zener diode	18V±10%, Izt=14mA, Zzt=20Ω, 1W	DO-214AC	1d	1a	Eic
4746A	-	SMA4746A	Zener diode	18V±5%, Izt=14mA, Zzt<20Ω, 1W	DO-214AC	1d	1t	Exc
4746A	-	SML4746A	Zener diode	18V±5%, Izt=14mA, Zzt=20Ω, 1W	DO-214AC	1d	1a	Eic
4747	-	SML4747	Zener diode	20V±10%, Izt=12.5mA, Zzt=22Ω, 1W	DO-214AC	1d	1a	Eic
4747A	-	SMA4747A	Zener diode	20V±5%, Izt=12.5mA, Zzt<22Ω, 1W	DO-214AC	1d	1t	Exc
4747A	-	SML4747A	Zener diode	20V±5%, Izt=12.5mA, Zzt=22Ω, 1W	DO-214AC	1d	1a	Eic
4748	-	SML4748	Zener diode	22V±10%, Izt=11.5mA, Zzt=23Ω, 1W	DO-214AC	1d	1a	Eic
4748A	-	SMA4748A	Zener diode	22V±5%, Izt=11.5mA, Zzt<23Ω, 1W	DO-214AC	1d	1t	Exc
4748A	-	SML4748A	Zener diode	22V±5%, Izt=11.5mA, Zzt=23Ω, 1W	DO-214AC	1d	1a	Eic
4749	-	SML4749	Zener diode	24V±10%, Izt=10.5mA, Zzt=25Ω, 1W	DO-214AC	1d	1a	Eic
4749A	-	SMA4749A	Zener diode	24V±5%, Izt=10.5mA, Zzt<25Ω, 1W	DO-214AC	1d	1t	Exc
4749A	-	SML4749A	Zener diode	24V±5%, Izt=10.5mA, Zzt=25Ω, 1W	DO-214AC	1d	1a	Eic
4750	-	SML4750	Zener diode	27V±10%, Izt=9.5mA, Zzt=35Ω, 1W	DO-214AC	1d	1a	Eic
4750A	-	SMA4750A	Zener diode	27V±5%, Izt=9.5mA, Zzt<35Ω, 1W	DO-214AC	1d	1t	Exc
4750A	-	SML4750A	Zener diode	27V±5%, Izt=9.5mA, Zzt=35Ω, 1W	DO-214AC	1d	1a	Eic
4751	-	SML4751	Zener diode	30V±10%, Izt=8.5mA, Zzt=40Ω, 1W	DO-214AC	1d	1a	Eic
4751A	-	SMA4751A	Zener diode	30V±5%, Izt=8.5mA, Zzt<40Ω, 1W	DO-214AC	1d	1t	Exc
4751A	-	SML4751A	Zener diode	30V±5%, Izt=8.5mA, Zzt=40Ω, 1W	DO-214AC	1d	1a	Eic
4752	-	SML4752	Zener diode	33V±10%, Izt=7.5mA, Zzt=45Ω, 1W	DO-214AC	1d	1a	Eic
4752A	-	SMA4752A	Zener diode	33V±5%, Izt=7.5mA, Zzt<45Ω, 1W	DO-214AC	1d	1t	Exc
4752A	-	SML4752A	Zener diode	33V±5%, Izt=7.5mA, Zzt=45Ω, 1W	DO-214AC	1d	1a	Eic
4753	-	SML4753	Zener diode	36V±10%, Izt=7mA, Zzt=50Ω, 1W	DO-214AC	1d	1a	Eic
4753A	-	SMA4753A	Zener diode	36V±5%, Izt=7.0mA, Zzt<50Ω, 1W	DO-214AC	1d	1t	Exc
4753A	-	SML4753A	Zener diode	36V±5%, Izt=7mA, Zzt=50Ω, 1W	DO-214AC	1d	1a	Eic
4754	-	SML4754	Zener diode	39V±10%, Izt=6.5mA, Zzt=60Ω, 1W	DO-214AC	1d	1a	Eic
4754A	-	SMA4754A	Zener diode	39V±5%, Izt=6.5mA, Zzt<60Ω, 1W	DO-214AC	1d	1t	Exc
4754A	-	SML4754A	Zener diode	39V±5%, Izt=6.5mA, Zzt=60Ω, 1W	DO-214AC	1d	1a	Eic
4755	-	SML4755	Zener diode	43V±10%, Izt=6mA, Zzt=70Ω, 1W	DO-214AC	1d	1a	Eic
4755A	-	SMA4755A	Zener diode	43V±5%, Izt=6.0mA, Zzt<70Ω, 1W	DO-214AC	1d	1t	Exc
4755A	-	SML4755A	Zener diode	43V±5%, Izt=6mA, Zzt=70Ω, 1W	DO-214AC	1d	1a	Eic
4756	-	SML4756	Zener diode	47V±10%, Izt=5.5mA, Zzt=80Ω, 1W	DO-214AC	1d	1a	Eic
4756A	-	SMA4756A	Zener diode	47V±5%, Izt=5.5mA, Zzt<80Ω, 1W	DO-214AC	1d	1t	Exc
4756A	-	SML4756A	Zener diode	47V±5%, Izt=5.5mA, Zzt=80Ω, 1W	DO-214AC	1d	1a	Eic



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
4757	-	SML4757	Zener diode	51V±10%, Izt=5mA, Zzt=95Ω, 1W	DO-214AC	1d	1a	Eic
4757A	-	SMA4757A	Zener diode	51V±5%, Izt=5mA, Zzt<95Ω, 1W	DO-214AC	1d	1t	Exc
4757A	-	SML4757A	Zener diode	51V±5%, Izt=5mA, Zzt=95Ω, 1W	DO-214AC	1d	1a	Eic
4758	-	SML4758	Zener diode	56V±10%, Izt=4.5mA, Zzt=110Ω, 1W	DO-214AC	1d	1a	Eic
4758A	-	SMA4758A	Zener diode	56V±5%, Izt=4.5mA, Zzt<110Ω, 1W	DO-214AC	1d	1t	Exc
4758A	-	SML4758A	Zener diode	56V±5%, Izt=4.5mA, Zzt=110Ω, 1W	DO-214AC	1d	1a	Eic
4759	-	SML4759	Zener diode	62V±10%, Izt=4mA, Zzt=125Ω, 1W	DO-214AC	1d	1a	Eic
4759A	-	SMA4759A	Zener diode	62V±5%, Izt=4.0mA, Zzt<125Ω, 1W	DO-214AC	1d	1t	Exc
4759A	-	SML4759A	Zener diode	62V±5%, Izt=4mA, Zzt=125Ω, 1W	DO-214AC	1d	1a	Eic
4760	-	SML4760	Zener diode	68V±10%, Izt=3.7mA, Zzt=150Ω, 1W	DO-214AC	1d	1a	Eic
4760A	-	SMA4760A	Zener diode	68V±5%, Izt=3.7mA, Zzt<150Ω, 1W	DO-214AC	1d	1t	Exc
4760A	-	SML4760A	Zener diode	68V±5%, Izt=3.7mA, Zzt=150Ω, 1W	DO-214AC	1d	1a	Eic
4761	-	SML4761	Zener diode	75V±10%, Izt=3.3mA, Zzt=175Ω, 1W	DO-214AC	1d	1a	Eic
4761A	-	SMA4761A	Zener diode	75V±5%, Izt=3.3mA, Zzt<175Ω, 1W	DO-214AC	1d	1t	Exc
4761A	-	SML4761A	Zener diode	75V±5%, Izt=3.3mA, Zzt=175Ω, 1W	DO-214AC	1d	1a	Eic
4762	-	SML4762	Zener diode	82V±10%, Izt=3mA, Zzt=200Ω, 1W	DO-214AC	1d	1a	Eic
4762A	-	SMA4762A	Zener diode	82V±5%, Izt=3.0mA, Zzt<200Ω, 1W	DO-214AC	1d	1t	Exc
4762A	-	SML4762A	Zener diode	82V±5%, Izt=3mA, Zzt=200Ω, 1W	DO-214AC	1d	1a	Eic
4763	-	SML4763	Zener diode	91V±10%, Izt=2.8mA, Zzt=250Ω, 1W	DO-214AC	1d	1a	Eic
4763A	-	SMA4763A	Zener diode	91V±5%, Izt=2.8mA, Zzt<250Ω, 1W	DO-214AC	1d	1t	Exc
4763A	-	SML4763A	Zener diode	91V±5%, Izt=2.8mA, Zzt=250Ω, 1W	DO-214AC	1d	1a	Eic
4764	-	SML4764	Zener diode	100V±10%, Izt=2.5mA, Zzt=350Ω, 1W	DO-214AC	1d	1a	Eic
4764A	-	SMA4764A	Zener diode	100V±5%, Izt=2.5mA, Zzt<350Ω, 1W	DO-214AC	1d	1t	Exc
4764A	-	SML4764A	Zener diode	100V±5%, Izt=2.5mA, Zzt=350Ω, 1W	DO-214AC	1d	1a	Eic
47A	-	1.5SMC47A	TVS	Vrwm=40.2V, Vbr=44.7..49.4V, Ipp=23.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
47A	-	1.5SMC47A	TVS	Vrwm=40.2V, Vbr=44.7..49.4V, Ipp=23.2A, 1500W(1ms)	DO-214AB	1d	2s	Lif
47A	-	1.5SMC47A	TVS	Vrwm=40.2V, Vbr=44.7..49.4V, Ipp=23.2A, 1500W(1ms)	403	3d	2t	Ons
47A	-	1.5SMC47A	TVS	Vrwm=40.2V, Vbr=44.7..49.4V, Ipp=23.2A, 1500W(1ms)	DO-214AB	1d	1b	Mde
47A	-	P4SMA47A	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
47A	-	P4SMA47A	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.5A, 400W(1ms)	DO-214AC	1d	1k	Vs
47A	-	P6SMB47A	TVS	Vrwm=47V, Vbr=44.7..49.4V, 9.3A, 600W(1ms)	403A	3d	1s	Ons
47A	-	P6SMB47A	TVS	Vrwm=47V, Vbr=44.7..49.4V, 9.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
47A	-	P6SMBJ47A	TVS	Vrwm=47V, Vbr=42.3..51.7V, 9.3A, 600W(1ms)	DO-214AA	1d	1n	Lif
47A	-	SMAJP4KE47A	TVS	Vrwm=40.20V, Vbr=44.70..49.40V, Ipp=6.3A, 400W(1ms)	DO-214AC	1d	1a	Mco
47A	-	SMBJP6KE47A	TVS	Vrwm=40.20V, Vbr=44.70..49.40V, Ipp=9.4A, 600W(1ms)	DO-214AA	1d	1a	Mco
47A	-	SMCJ1.5KE47A	TVS	Vrwm=40.20V, Vbr=44.70..49.40V, Ipp=23.5A, 1500W(1ms)	DO-214AB	1d	1a	Mco
47A	-	SZP6SMB47A	TVS	Vrwm=47V, Vbr=44.7..49.4V, 9.3A, 600W(1ms)	403A	3d	1s	Ons
47A	-	TVP04A470A-G	TVS	Vbr=44.65..49.35V, Vrwm=40.2V, Ipp=6.17A, 400W(1ms)	DO-214AC	1d	2o	Cmc
47A	-	TVP06B47A-G	TVS	Vrwm=40.2V, Vbr=44.65..49.35V, Ipp=9.26A, 600W(1ms)	DO-214AA	1d	2o	Cmc
47AP	-	15TPSMC47A	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 23.5A, 1500W(1ms)	DO-214AB	1d	1p	Lif
47AP	-	4TPSMA47A	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.3A, 400W(1ms)	DO-214AC	1d	1p	Lif
47AP	-	6TPSMB47A	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 9.4A, 600W(1ms)	DO-214AA	1d	1p	Lif
47B	-	1SMB3EZ47	Zener diode	47V±5%, Zzt=40Ω, Izt=16.0mA, 3W	DO-214AA	1d	1a	Pjt
47B	-	MMHZ5247BPT	Zener diode	16.15..17.85V, Izt=5mA, Zzt=36Ω, 225mW	SOD-123	5d	1a	Chm
47B	-	SMC5347B	Zener diode	10.0V±5%, Zzt=2.0Ω(125.0mA), Izm=475.0mA, 5W	DO-214AB	1d	1a	Ers
47B	-	Z3SMB47B	Zener diode	44.65..49.35V, Izt=16mA, Zzt=38Ω, 3W	DO-214AA	1d	1a	Ttr
47C	-	1.5SMC47CA	TVS	Vrwm=40.2V, Vbr=44.7..49.4V, Ipp=23.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
47C	-	1.5SMC47CA	TVS	Vrwm=40.2V, Vbr=44.7..49.4V, Ipp=23.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
47C	-	1.5SMC47CA	TVS	Vrwm=40.2V, Vbr=44.7..49.4V, Ipp=23.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
47C	-	P4SMA47C	TVS	Vbr=42.3..51.7V, Vrwm=38.1V, 6.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
47C	-	P4SMA47CA	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
47C	-	P6SMB47CA	TVS	Vrwm=47V, Vbr=44.7..49.4V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
47C	-	P6SMBJ47C	TVS	Vrwm=47V, Vbr=42.3..51.7V, 8.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
47C	-	SMAJP4KE47CA	TVS	Vrwm=40.20V, Vbr=44.70..49.40V, Ipp=6.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
47C	-	SMBJP6KE47CA	TVS	Vrwm=40.20V, Vbr=44.70..49.40V, Ipp=9.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
47C	-	SMCJ1.5KE47CA	TVS	Vrwm=40.20V, Vbr=44.70..49.40V, Ipp=23.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
47C	-	TVP04A470CA-G	TVS	Vbr=44.65..49.35V, Vrwm=40.2V, Ipp=6.17A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
47C	-	TVP06B47ACA-G	TVS	Vrwm=40.2V, Vbr=44.65..49.35V, Ipp=9.26A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
47CA	-	P4SMA47CA	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
47CA	-	P6SMB47CA	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
47CA	-	P6SMBJ47CA	TVS	Vrwm=47V, Vbr=42.3..51.7V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
47CP	-	15TPSMC47CA	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 23.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
47CP	-	4TPSMA47CA	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1p	Lif
47CP	-	6TPSMB47CA	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 9.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
47P	-	BZD27C47P	Zener diode	44.65..49.35V, Zzt=45Ω, Izt=10mA, 800mW	SOD-123FL	7d	1a	Pjt
47P	-	MFPZ47	Zener diode	44.65..49.35V, Izt=10mA, Zzt=45Ω, 800mW	SOD-123FL	7d	1a	Ttr
47S	-	MMHZ5247SPT	Zener diode	16.66..17.34V, Izt=5mA, Zzt=36Ω, 225mW	SOD-123	5d	1a	Chm
47VB	-	BZT52B47	Zener diode	46.06..47.94V, Izt=2mA, Zzt=170Ω, 500mW	SOD-123FL	7d	1a	Tsc
47VB	-	MMSZ47VBW	Zener diode	46.06..47.94V, Izt=2mA, Zzt=170Ω, 500mW	SOD-123FL	7d	1a	Tac
47VZ	-	BZT52C47	Zener diode	44.65..49.35V, Izt=2mA, Zzt=170Ω, 500mW	SOD-123FL	7d	1a	Tsc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
47VZ	-	MMSZ47VCW	Zener diode	44.65..49.35V, Izt=2mA, Zzt=170Ω, 500mW	SOD-123FL	7d	1a	Tac
47VZ	-	TCMMSZ47V	Zener diode	47V±5%, Izt=5mA, Zzt=160Ω, 500mW	SOD-123FL	7d	1a	Tac
47VZ	-	ZGFM0547C-MH	Zener diode	44.65..49.35V, Izt=5mA, Zzt=160Ω, 500mW	SOD-123	5d	1a	Pic
48	-	HMSZ5248B	Zener diode	18V±5%, Izt=7mA, Zzt=21Ω, 225mW	SOD-323	5d	1d	Hsn
48	-	SMBG48	TVS	Vrwm=48V, Vbr=53.3..67.5V, 7.0A, 600W(1ms)	DO-215AA	5d	1a	Msc
48	-	ZD5248BS2	Zener diode	18V±5%, 7mA, Zzt=21Ω, 500mW	SOD-323	5d	1a	Cys
480A	-	1.5SMC480A	TVS	Vrwm=408.0V, Vbr=408..456V, Ipp=2.3A, 1500W(1ms)	DO-214AB	1d	2s	Lif
480A	-	1.5SMC480A	TVS	Vrwm=408.0V, Vbr=408..456V, Ipp=2.3A, 1500W(1ms)	DO-214AB	1d	1b	Mde
480A	-	1.5SMC480A	TVS	Vrwm=408.0V, Vbr=408..456V, Ipp=2.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
480A	-	P4SMA480A	TVS	Vbr=456..504V, Vrwm=410V, 0.46A, 400W (1ms)	DO-214AC	1d	1k	Vs
480A	-	P6SMA480A	TVS	Vbr=456..504V, Vrwm=408V, 0.91A, 600W(1ms)	DO-214AC	1d	1a	Eic
480A	-	P6SMB480A	TVS	Vrwm=480V, Vbr=456..504, 0.91A, 600W(1ms)	DO-214AA	1d	1k	Vs
480A	-	SMAJP4KE480A	TVS	Vrwm=408.0V, Vbr=456.0..504.0V, Ipp=0.6A, 400W(1ms)	DO-214AC	1d	1a	Mco
480A	-	SMBJP6KE480A	TVS	Vrwm=408.0V, Vbr=456.0..504.0V, Ipp=0.9A, 600W(1ms)	DO-214AA	1d	1a	Mco
480A	-	SMCJ1.5KE480A	TVS	Vrwm=408.0V, Vbr=456.0..504.0V, Ipp=2.3A, 1500W(1ms)	DO-214AB	1d	1a	Mco
480C	-	1.5SMC480CA	TVS	Vrwm=408.0V, Vbr=408..456V, Ipp=2.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
480C	-	1.5SMC480CA	TVS	Vrwm=408.0V, Vbr=408..456V, Ipp=2.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
480C	-	1.5SMC480CA	TVS	Vrwm=408.0V, Vbr=408..456V, Ipp=2.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Fee
480C	-	SMAJP4KE480CA	TVS	Vrwm=408.0V, Vbr=456.0..504.0V, Ipp=0.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
480C	-	SMBJP6KE480CA	TVS	Vrwm=408.0V, Vbr=456.0..504.0V, Ipp=0.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
480C	-	SMCJ1.5KE480CA	TVS	Vrwm=408.0V, Vbr=456.0..504.0V, Ipp=2.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
480CA	-	P6SMA480CA	TVS	Vbr=456..504V, Vrwm=408V, 0.91A, 600W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
48A	-	1SMC48A	TVS	Vbr=53.3..58.9V, Vrwm=48V, 19.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
48A	-	MMF48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, Ipp=2.6A, 200W(1ms)	SOD-123FL	7d	2m	Sst
48A	-	SMAJ48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, 5.2A, 400W(1ms)	DO-214AC	1d	1a	Sus
48A	-	SMBG48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms)	DO-215AA	5d	1a	Msc
48A	-	SMBJ48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms)	DO-214AA	1d	1a	Sus
48A	-	SMCJ48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, 17.5A, 1500W(1ms)	DO-214AB	1d	1k	Sus
48A	-	SMF48A	TVS	Vbr=53.3..58.9V, Vrwm=48V, Ipp=2.6A, 200W(1ms)	SOD-123FL	7d	1a	Mco
48A	-	UMA48A	TVS	Vrwm=48V, Vbr=53.3..77.4V, 6.5A, 500W(1ms)	UltraMite	14d	1v	Msc
48B	-	MMHZ5248BPT	Zener diode	17.10..18.90V, Izt=5mA, Zzt=42Ω, 225mW	SOD-123	5d	1a	Chm
48B	-	SMC5348B	Zener diode	11.0V±5%, Zzt=2.5(125.0mA), Izm=430.0mA, 5W	DO-214AB	1d	1a	Ers
48C	-	SMBG48C	TVS	Vrwm=48V, Vbr=53.3..67.5V, 7.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
48CA	-	1SMC48CA	TVS	Vbr=53.3..58.9V, Vrwm=48V, 19.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
48CA	-	MMF48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, Ipp=2.6A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
48CA	-	SMAJ48CA	TVS	Vrwm=48V, Vbr=53.3..58.9V, 5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
48CA	-	SMBG48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
48CA	-	SMBJ48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
48CA	-	SMCJ48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, 17.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
48CA	-	SMF48CA	TVS	Vbr=53.3..58.9V, Vrwm=48V, Ipp=2.6A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
48CA	-	UMA48CA	TVS	Vrwm=48V, Vbr=53.3..77.4V, 6.5A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
48S	-	MMHZ5248SPT	Zener diode	17.64..18.36V, Izt=5mA, Zzt=42Ω, 225mW	SOD-123	5d	1a	Chm
48V	-	SMA48	TVS	Vbr=53.3..65.1V, Vrwm=48.0V, 3.5A, 300W(1ms)	DO-214AC	1d	1a	Mic
48V	-	SMB48	TVS	Vbr=53.3..65.1V, Vrwm=48V, 7A, 600W(1ms)	DO-214AA	1d	1a	Mic
48V	-	SMC48	TVS	Vbr=53.3..65.1V, Vrwm=48V, 17.5A, 1500W(1ms),	DO-214AB	1d	1a	Mic
48VA	-	SMA48A	TVS	Vbr=53.3..58.9V, Vrwm=48.0V, 3.6A, 300W(1ms)	DO-214AC	1d	1a	Mic
48VA	-	SMB48A	TVS	Vbr=53.3..58.9V, Vrwm=48V, 7.8A, 600W(1ms)	DO-214AA	1d	1a	Mic
48VA	-	SMC48A	TVS	Vbr=53.3..58.9V, Vrwm=48V, 19.4A, 1500W(1ms),	DO-214AB	1d	1a	Mic
48VC	-	SMA48C	TVS	Vbr=53.3..65.1V, Vrwm=48.0V, 3.5A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
48VC	-	SMB48C	TVS	Vbr=53.3..65.1V, Vrwm=48V, 7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
48VC	-	SMC48C	TVS	Vbr=53.3..65.1V, Vrwm=48V, 17.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
48VCA	-	SMA48CA	TVS	Vbr=53.3..58.9V, Vrwm=48.0V, 3.6A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
48VCA	-	SMB48CA	TVS	Vbr=53.3..58.9V, Vrwm=48V, 7.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
48VCA	-	SMC48CA	TVS	Vbr=53.3..58.9V, Vrwm=48V, 19.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
49	-	HMSZ5249B	Zener diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 225mW	SOD-323	5d	1d	Hsn
49	-	ZD5249BS2	Zener diode	19V±5%, 6.6mA, Zzt=23Ω, 500mW	SOD-323	5d	1a	Cys
4933	-	FSM4933PT	Si-diode	Rectifer, Fast, 50V, 1A	DO-214AC	1d	1a	Chm
4934	-	FSM4934PT	Si-diode	Rectifer, Fast, 100V, 1A	DO-214AC	1d	1a	Chm
4935	-	FSM4935PT	Si-diode	Rectifer, Fast, 200V, 1A	DO-214AC	1d	1a	Chm
4936	-	FSM4936PT	Si-diode	Rectifer, Fast, 400V, 1A	DO-214AC	1d	1a	Chm
4937	-	FSM4937PT	Si-diode	Rectifer, Fast, 600V, 1A	DO-214AC	1d	1a	Chm
49B	-	MMHZ5249BPT	Zener diode	18.05..19.95V, Izt=5mA, Zzt=42Ω, 225mW	SOD-123	5d	1a	Chm
49B	-	SMC5349B	Zener diode	12.0V±5%, Zzt=3.0(100.0mA), Izm=395.0mA, 5W	DO-214AB	1d	1a	Ers
49S	-	MMHZ5249SPT	Zener diode	18.62..19.38V, Izt=5mA, Zzt=42Ω, 225mW	SOD-123	5d	1a	Chm
4A	-	D3FS4A	Si-diode	SBR, 60V, 2.6A, Vf<0.45V(2.6A)	SOD-15	1d	1a	Shi
4A	-	HZU4ALL	Zener diode	3.4..3.8V, Izt=0.5mA, Zzt=370Ω, 150mW	URP	5d	1a	Ren
4A	-	MA72	C-diode	VHF-Band-Sw, 35V, <2pF(6V)	SOD-123	5d	1a	Pan
4A	-	MM1Z2V0	Zener diode	2.0V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1a	Bts
4A	-	MMVL109	C-diode	VHF-tuning, 30V, 200mA, 200mW, 26/32pF(3V, 1MHz)	SOD-323	5d	1a	Ons
4A	-	OYD2V0T1	Zener diode	1.8...2.15V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1a	Ouy

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
4A	-	TDZ22J	Zener diode	21.6..22.4V, Izt=5mA, Zzt=25Ω, 500mW	SOD-323F	7d	1a	Nxp
4A3	-	RKZ4.3AKU	Zener diode	4.04..4.29V, Izt=20mA, Zzt=130Ω, 500mW	TURP-FM	7d	1a	Ren
4A7	-	RKZ4.7AKU	Zener diode	4.44..4.68V, Izt=20mA, Zzt=130Ω, 500mW	TURP-FM	7d	1a	Ren
4B	-	HZU4BLL	Zener diode	3.7..4.1V, Izt=0.5mA, Zzt=370Ω, 150mW	URP	5d	1a	Ren
4B	-	MA2X073	Si-diode	VHF-Band-Sw, 35V, 100mA, <1.2pF(6V)	SOD-123	5d	1a	Pan
4B	-	MA2Z077	Si-diode	VHF-Band-Sw, 35V, 100mA, Vf<0.92V(100mA), 0.9pF	SOD-123	5d	1a	Pan
4B	-	MA73	Si-diode	VHF-Band-Sw, 35V, 100mA, <1.2pF(6V)	SOD-123	5d	1a	Pan
4B	-	MA77	Si-diode	VHF-Band-Sw, 35V, 100mA, Vf<0.92V(100mA), 0.9pF	SOD-123	5d	1a	Pan
4B	-	MM1Z2V2	Zener diode	2.2V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1a	Bts
4B	-	OYD2V2T1	Zener diode	2.08...2.33V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1a	Ouy
4B	-	TDZ24J	Zener diode	23.5..24.5V, Izt=5mA, Zzt=30Ω, 500mW	SOD-323F	7d	1a	Nxp
4B1	-	STZ8150A	Zener diode	13.9..14.76V, Izt=5mA, Zzt=40Ω, 300mW	SOD-323	5d	1a	Jiy
4B3	-	RKZ4.3BKU	Zener diode	4.17..4.43V, Izt=20mA, Zzt=130Ω, 500mW	TURP-FM	7d	1a	Ren
4B7	-	RKZ4.7BKU	Zener diode	4.55..4.80V, Izt=20mA, Zzt=130Ω, 500mW	TURP-FM	7d	1a	Ren
4C	-	BZT52C17WU	Zener diode	16.15..17.85V, Izt=5mA, Zzt=40Ω, 200mW	SOD-723	7d	1a	Ttr
4C	-	BZX784C17	Zener diode	16.15..17.85V, Zzt=40Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
4C	-	CDZ55C4V3T	Zener diode	4.09..4.52V, Zzt=80Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
4C	-	HZU4CLL	Zener diode	4.0..4.4V, Izt=0.5mA, Zzt=370Ω, 150mW	URP	5d	1a	Ren
4C	-	MA79	Si-diode	VHF-Band-Sw, 25V, <1.5pF(6V)	SOD-123	5d	1a	Pan
4C	-	MM1Z2V4	Zener diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123FL	7d	1a	Eic
4C	-	MMSZ2V4	Zener diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1a	Eic
4C	-	MMVL3102	C-diode	FM/VHF-tuning, 30V, 200mA, 200mW, 20/25pF(3V, 1MHz)	SOD-323	5d	1a	Ons
4C	-	TDZ27J	Zener diode	26.5..27.5V, Izt=2mA, Zzt=40Ω, 500mW	SOD-323F	7d	1a	Nxp
4C	-	USCD034	Si-diode	SBR, 40V, 0.3A, Vf<0.5V(0.3A)	0603	14d	1v	Zow
4C3	-	RKZ4.3CKU	Zener diode	4.30..4.57V, Izt=20mA, Zzt=130Ω, 500mW	TURP-FM	7d	1a	Ren
4C7	-	RKZ4.7CKU	Zener diode	4.68..4.93V, Izt=20mA, Zzt=130Ω, 500mW	TURP-FM	7d	1a	Ren
4D	-	MA2Z081	Si-diode	VHF-Band-Sw, 35V, 100mA, Vf<0.96V(100mA), 0.9pF	SOD-123	5d	1a	Pan
4D	-	MA81	Si-diode	VHF-Band-Sw, 35V, 100mA, Vf<0.96V(100mA), 0.9pF	SOD-123	5d	1a	Pan
4D	-	MM1Z2V7	Zener diode	2.7V±5%, Izt=5mA, Zzt=110Ω, 500mW	SOD-123FL	7d	1a	Eic
4D	-	MMBL914HPT	Si-diode	Sw, 100V, 200mA, Vf<1V(10mA), 4ns	SOD-323	5d	1a	Chm
4D	-	MMSZ2V7	Zener diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1a	Eic
4D	-	MMVL3401	PIN-diode	VHF-Sw, 20V, 20mA, 200mW, <1pF, <0.7Ω(10mA/100MHz)	SOD-323	5d	1a	Ons
4D	-	TDZ30J	Zener diode	29.4..30.6V, Izt=2mA, Zzt=40Ω, 500mW	SOD-323F	7d	1a	Nxp
4D	-	USCD024	Si-diode	SBR, 40V, 0.2A, Vf<0.45V(0.2A)	0603	14d	1v	Zow
4D1	-	STZ8150C	Zener diode	14.95..15.6V, Izt=5mA, Zzt=40Ω, 300mW	SOD-323	5d	1a	Jiy
4D1	-	USCD024R	Si-diode	SBR, 40V, 0.2A, Vf<0.45V(0.2A)	0603	14d	1v	Zow
4E	-	MM1Z3V0	Zener diode	3.0V±5%, Izt=5mA, Zzt=120Ω, 500mW	SOD-123FL	7d	1a	Eic
4E	-	MMSZ3V0	Zener diode	3.0V±5%, Izt=5mA, Zzt=95Ω, 500mW	SOD-123	5d	1a	Eic
4E	-	MMVL105G	C-diode	VHF-tuning, 30V, 200mA, 200mW, 1.5/2.8pF(25V, 1MHz)	SOD-323	5d	1a	Ons
4F	-	KDZ4.3FV	Zener diode	4.0..4.50V, Izt=5mA, Zzt=130Ω, 100mW	TFSC	7d	1a	Kec
4F	-	MAZD033	Zener diode	3.1..3.5V, Zzt=130Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
4F	-	MM1Z3V3	Zener diode	3.3V±5%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Eic
4F	-	MMSZ3V3	Zener diode	3.3V±5%, Izt=5mA, Zzt=95Ω, 500mW	SOD-123	5d	1a	Eic
4F	-	USCD014	Si-diode	SBR, 40V, 0.1A, Vf<0.4V(0.1A)	0603	14d	1v	Zow
4F1	-	STZ8160A	Zener diode	15.3..16.09V, Izt=5mA, Zzt=50Ω, 300mW	SOD-323	5d	1a	Jiy
4G	-	CDZ55C4V7T	Zener diode	4.47..4.94V, Zzt=70Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
4G	-	MMVL2101	C-diode	FM/VHF-tuning, 30V, 200mA, 200mW, 6.1/7.5pF(4V, 1MHz)	SOD-323	5d	1a	Ons
4H	-	MM1Z3V6	Zener diode	3.6V±5%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Eic
4H	-	MMSZ3V6	Zener diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1a	Eic
4H1	-	STZ8160C	Zener diode	16.26..17.1V, Izt=5mA, Zzt=50Ω, 300mW	SOD-323	5d	1a	Jiy
4J	-	MM1Z3V9	Zener diode	3.9V±5%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Eic
4J	-	MMSZ3V9	Zener diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1a	Eic
4K	-	MM1Z4V3	Zener diode	4.3V±5%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Eic
4K	-	MMSD1000	Si-diode	Sw, 30V, 200mA, 225mW, Vf<0.95V(10mA), <2pF	SOD-323	5d	1a	Mot
4K	-	MMSZ4V3	Zener diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1a	Eic
4K1	-	STZ8180A	Zener diode	16.9..17.76V, Izt=5mA, Zzt=60Ω, 300mW	SOD-323	5d	1a	Jiy
4L7	-	KP4L07	Thy-SPD	V Of-St=65V, Ifsm=40A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
4L8	-	KP4L08	Thy-SPD	V Of-St=70V, Ifsm=40A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
4M	-	MM1Z4V7	Zener diode	4.7V±5%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Eic
4M	-	MMDL101	Si-diode	UHF/VHF Det, Schottky Barrier, 7V, 200mW, <0.88pF	SOD-323	5d	1a	Ons
4M	-	MMSZ4V7	Zener diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1a	Eic
4M1	-	STZ8180C	Zener diode	18.2..19.1V, Izt=5mA, Zzt=60Ω, 300mW	SOD-323	5d	1a	Jiy
4N	-	MM1Z5V1	Zener diode	5.1V±5%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Eic
4N	-	MMSZ5V1	Zener diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 500mW	SOD-123	5d	1a	Eic
4N12	-	KP4N12	Thy-SPD	V Of-St=110V, Ifsm=40A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
4N14	-	KP4N14	Thy-SPD	V Of-St=130V, Ifsm=40A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
4P	-	CMDZ24L	Zener diode	22.80..25.20V, Izt=0.5mA, Zzt=120Ω, 250mW	SOD-323	5d	1a	Cen
4P	-	KDZ4.3FVY	Zener diode	4.17..4.43V, Izt=5mA, Zzt=130Ω, 100mW	TFSC	7d	1a	Kec
4P	-	MM1Z5V6	Zener diode	5.6V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Eic
4P	-	MMSZ5V6	Zener diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
4P1	-	STZ8200A	Zener diode	18.85..19.81V, Izt=5mA, Zzt=80Ω, 300mW	SOD-323	5d	1a	Jiy
4P3	-	SML4731	Zener diode	4.3V±5%, Izt=58mA, Zzt=9Ω, 1W	DO-214AC	1d	1k	Vs
4P7	-	SML4732	Zener diode	4.7V±5%, Izt=53mA, Zzt=8Ω, 1W	DO-214AC	1d	1k	Vs
4R	-	MM1Z6V2	Zener diode	6.2V±5%, Izt=5mA, Zzt=50Ω, 500mW	SOD-123FL	7d	1a	Eic
4R	-	MMSZ6V2	Zener diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 500mW	SOD-123	5d	1a	Eic
4R	-	MMVL3700	PIN-diode	VHF-Sw, 200V, 20mA, 200mW, <1pF, <1Ω(10mA/100MHz)	SOD-323	5d	1a	Ons
4R1	-	STZ8200C	Zener diode	20.15..21.19V, Izt=5mA, Zzt=80Ω, 300mW	SOD-323	5d	1a	Jiy
4R25	-	KP4R25	Thy-SPD	V Of-St=220V, Ifsm=40A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
4T	-	MMDL301	Si-diode	UHF/VHF Det, Schottky Barrier, 30V, 200mW, <0.9pF	SOD-323	5d	1a	Ons
4T1	-	STZ8220A	Zener diode	20.8..21.86V, Izt=5mA, Zzt=8Ω, 300mW	SOD-323	5d	1a	Jiy
4U	-	MMVL2105	C-diode	VHF-tuning, 30V, 200mA, 200mW, 13.5/16.5pF(4V, 1MHz)	SOD-323	5d	1a	Ons
4UA	-	SMM4F5.0A	TVS	Vrwm=5.0V, Vbr=6.46..7.14V, Ipp=174A, 400W(1ms)	DO-222AA	1d	1s	Ste
4UB	-	SMM4F6.0A	TVS	Vrwm=6.0V, Vbr=6.65..7.35V, Ipp=170A, 400W(1ms)	DO-222AA	1d	1s	Ste
4UC	-	SMM4F6.5A	TVS	Vrwm=6.5V, Vbr=7.13..7.88V, Ipp=160A, 400W(1ms)	DO-222AA	1d	1s	Ste
4UD	-	SMM4F8.5A	TVS	Vrwm=8.5V, Vbr=9.5..10.5V, Ipp=124A, 400W(1ms)	DO-222AA	1d	1s	Ste
4UE	-	SMM4F10A	TVS	Vrwm=10V, Vbr=11.4..12.6V, Ipp=106A, 400W(1ms)	DO-222AA	1d	1s	Ste
4UF	-	SMM4F12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=91A, 400W(1ms)	DO-222AA	1d	1s	Ste
4UG	-	SMM4F13A	TVS	Vrwm=13V, Vbr=14.3..15.8V, Ipp=85A, 400W(1ms)	DO-222AA	1d	1s	Ste
4UH	-	SMM4F15A	TVS	Vrwm=15V, Vbr=17.1..18.9V, Ipp=71A, 400W(1ms)	DO-222AA	1d	1s	Ste
4UJ	-	SMM4F18A	TVS	Vrwm=18V, Vbr=20.9..23.1V, Ipp=59A, 400W(1ms)	DO-222AA	1d	1s	Ste
4UK	-	SMM4F20A	TVS	Vrwm=20V, Vbr=22.8..25.2V, Ipp=54A, 400W(1ms)	DO-222AA	1d	1s	Ste
4UM	-	SMM4F24A	TVS	Vrwm=24V, Vbr=26.6..29.4V, Ipp=46A, 400W(1ms)	DO-222AA	1d	1s	Ste
4UN	-	SMM4F26A	TVS	Vrwm=26V, Vbr=28.5..31.5V, Ipp=43A, 400W(1ms)	DO-222AA	1d	1s	Ste
4UO	-	SMM4F28A	TVS	Vrwm=28V, Vbr=31.4..34.7V, Ipp=39A, 400W(1ms)	DO-222AA	1d	1s	Ste
4UQ	-	SMM4F33A	TVS	Vrwm=33V, Vbr=37.1..41.0V, Ipp=33A, 400W(1ms)	DO-222AA	1d	1s	Ste
4V3	-	BZD27C4V3P	Zener diode	4.09..4.52V, Zzt=7Ω, Izt=100mA, 800mW	SOD-123FL	7d	1a	Pjt
4V3	-	BZY55-C4V3	Zener diode	4.09..4.52V, Izt=5mA, Zzt=80Ω, 500mW	0805	70d	2d	Tsc
4V3	-	CDZ55C4V3	Zener diode	4.09..4.52V, Zzt=80Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
4V3	-	CDZ55C4V3S	Zener diode	4.09..4.52V, Zzt=80Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
4V3	-	CTZ55C4V3	Zener diode	4.09..4.52V, Izt=5mA, Zzt=80Ω, 500mW	1206	70d	2d	Ctc
4V3	-	CZRNC55C4V3-G	Zener diode	4.09..4.52V, Zt=80Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
4V3	-	CZRSC55C4V3-G	Zener diode	4.09..4.52V, Zt=80Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
4V3	-	MFPZ4V3	Zener diode	4.09..4.52V, Izt=100mA, Zzt=7Ω, 800mW	SOD-123FL	7d	1a	Ttr
4V3B	-	BZT52B4V3	Zener diode	4.21..4.39V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Tsc
4V3B	-	MMSZ4V3BW	Zener diode	4.21..4.39V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Tac
4V3Z	-	BZT52C4V3	Zener diode	4.09..4.52V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Tsc
4V3Z	-	MMSZ4V3CW	Zener diode	4.09..4.52V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Tac
4V3Z	-	TCMMSZ4V3	Zener diode	4.3V±5%, Izt=5mA, Zzt=84Ω, 500mW	SOD-123FL	7d	1a	Tac
4V3Z	-	ZGFM054V3C-MH	Zener diode	4.09..4.52V, Izt=5mA, Zzt=84Ω, 500mW	SOD-123	5d	1a	Pic
4V4Z	-	ZGFM054V7C-MH	Zener diode	4.47..4.94V, Izt=5mA, Zzt=75Ω, 500mW	SOD-123	5d	1a	Pic
4V7	-	BZD27C4V7P	Zener diode	4.47..4.94V, Zzt=7Ω, Izt=100mA, 800mW	SOD-123FL	7d	1a	Pjt
4V7	-	BZY55-C4V7	Zener diode	4.47..4.94V, Izt=5mA, Zzt=70Ω, 500mW	0805	70d	2d	Tsc
4V7	-	CDZ55C4V7	Zener diode	4.47..4.94V, Zzt=70Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
4V7	-	CDZ55C4V7S	Zener diode	4.47..4.94V, Zzt=70Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
4V7	-	CTZ55C4V7	Zener diode	4.47..4.94V, Izt=5mA, Zzt=70Ω, 500mW	1206	70d	2d	Ctc
4V7	-	CZRNC55C4V7-G	Zener diode	4.47..4.94V, Zt=70Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
4V7	-	CZRSC55C4V7-G	Zener diode	4.47..4.94V, Zt=70Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
4V7	-	MFPZ4V7	Zener diode	4.47..4.94V, Izt=100mA, Zzt=7Ω, 800mW	SOD-123FL	7d	1a	Ttr
4V7B	-	BZT52B4V7	Zener diode	4.61..4.79V, Izt=5mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tsc
4V7B	-	MMSZ4V7BW	Zener diode	4.61..4.79V, Izt=5mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tac
4V7Z	-	BZT52C4V7	Zener diode	4.47..4.94V, Izt=5mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tsc
4V7Z	-	MMSZ4V7CW	Zener diode	4.47..4.94V, Izt=5mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tac
4V7Z	-	TCMMSZ4V7	Zener diode	4.7V±5%, Izt=5mA, Zzt=75Ω, 500mW	SOD-123FL	7d	1a	Tac
4W	-	MM3Z75V	Zener diode	70..79V, Izt=2mA, Zzt=255Ω, 200mW	SOD-323	5d	1a	Sec
4W1	-	STZ8220C	Zener diode	22.1..23.24V, Izt=5mA, Zzt=8Ω, 300mW	SOD-323	5d	1a	Jiy
4X	-	MM1Z6V8	Zener diode	6.8V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Eic
4X	-	MMSZ6V8	Zener diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1a	Eic
4Y	-	KDZ20VVY	Zener diode	19.52..20.39V, Izt=5mA, Zzt=25Ω, 100mW	VSC	7d	1a	Kec
4Y	-	MM1Z7V5	Zener diode	7.5V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Eic
4Y	-	MMSZ7V5	Zener diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1a	Eic
4Y1	-	STZ8240A	Zener diode	22.8..23.97V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323	5d	1a	Jiy
4Z	-	BZT52B3V6S	Zener diode	3.53..3.67V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1a	Tsc
4Z	-	MM1Z8V2	Zener diode	8.2V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Eic
4Z	-	MM3Z3V6B	Zener diode	3.53..3.67V, Zzt=84Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
4Z	-	MM3Z3V6BW	Zener diode	3.53..3.67V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1a	Tac
4Z	-	MMSZ8V2	Zener diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1a	Eic
4Z	-	TCMM3Z3V6B	Zener diode	3.6V±2%, Izt=5mA, Zzt=84Ω, 200mW	SOD-323FL	7d	1a	Tac
5	-	1SV202	C-diode	UHF-tuning, 30V, 2.1/2.39pF(25V)	SOD-123	5d	1a	Hit
5	-	BA892	PIN-diode	VHF, TV-Band-Sw, 35V, 100mA, 715mW, Vf<1V(10mA), <1.4pF	SOD-523	6d	1a	Phi
5	-	BBY57-02V	C-diode	VCO-tuning, 10V, 20mA, 16.5..18.6pF(4..1V)	SC-79	6d	1u	Inf

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5	-	CH751G-40PT	Si-diode	SBD, 40V, 30mA, Vf<0.37V(1mA)	SOD-723	8d	1a	Chm
5	-	GBLC05	TVS	Vrwm=5V, 17A, 350W(1ms), 3pF	SOD-323	5d	1a	Prt
5	-	HVR300	C-diode	VHF-tuning, 38.5/46.1pF(2V)	SOD-123	5d	1a	Ren
5	-	HVU202	C-diode	UHF-tuning, 30V, 14/16.3pF(2V)	SOD-323	5d	1a	Ren
5	-	MA2SV04	C-diode	VCO, 6V, 10.5..6.1pF(1..3V)	SOD-523	6d	1a	Pan
5	-	MAZS051	Zener diode	4.8..5.4V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
5	-	MM9D5V6	Zener diode	5.32..5.88V, Izt=5mA, Zzt=60Ω, 200mW	SOD-923	7d	1a	Wtr
5	-	MMPZ5226SPT	Zener diode	3.234..3.366V, Izt=5mA, Zzt=95Ω, 225mW	SOD-323	5d	1a	Chm
5	-	MMSZ5247BPT	Zener diode	17V±5%, Izt=7.4mA, Zzt=19Ω, 225mW	SOD-523	6d	1a	Chm
5	-	NZ9F18VST	Zener diode	17.56..18.35V, Izt=5mA, Zzt=50Ω, 200mW	SOD-923	7d	2m	Ons
5	-	NZ9F3V3ST	Zener diode	3.32..3.53V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1n	Ons
5	-	NZ9F5V6T	Zener diode	5.32..5.88V, Izt=5mA, Zzt=60Ω, 200mW	SOD-923	7d	1a	Ons
5	-	RB751G-40	Si-diode	SBR, 30V, 30mA, Vf<0.37V(1mA), 2pF	SOD-723	5d	1a	Rhm
5	-	RB751S-40	Si-diode	SBR, 30V, 30mA, Vf<0.37V(1mA), 2pF	SOD-523	6d	1a	Rhm
5	-	RB751V-40	Si-diode	SBR, 30V, 30mA, Vf<0.37V(1mA), 2pF	SOD-323	5d	1a	Rhm
5	aq	BZX584B62V	Zener diode	60.76..63.24V, Izt=2mA, Zzt=215Ω, 200mW	SOD-523FL	7d	1a	Tac
5	aq	MM5Z62VB	Zener diode	60.76..63.24V, Izt=2mA, Zzt=215Ω, 200mW	SOD-523FL	7d	1a	Tac
5	as	TCBZX584C62V	Zener diode	58..66V, Izt=2mA, Zzt=215Ω, 200mW	SOD-523FL	7d	1a	Tac
5	as	TCMM5Z62V	Zener diode	58..66V, Izt=2mA, Zzt=215Ω, 200mW	SOD-523FL	7d	1a	Tac
5	au	CDZ5.1B	Zener diode	5.1V±2.5%, Izt=40mA, 1W	VMN	7d	1s	Rhm
5	av	MM5Z62V	Zener diode	58..66V, Zzt=215Ω, Izt=2mA, 200mW	SOD-523FL	7d	1a	F
5	ba	BAT60B	Si-diode	SBD, Fast-Sw, 10V, 3A, Vf<0.3V(1A), 20pF	SOD-323	5d	2	Inf
5	ba	BBY53-03W	C-diode	VCO-tuning, 6V, 20mA, 3.1..5.8pF(3..1V)	SOD-323	5d	1a	Sie
-5	-	BZX584B51V	Zener diode	49.98..52.02V, Izt=2mA, Zzt=180Ω, 200mW	SOD-523FL	7d	1a	Tac
-5	-	MM5Z51VB	Zener diode	49.98..52.02V, Izt=2mA, Zzt=180Ω, 200mW	SOD-523FL	7d	1a	Tac
5-	-	MAZS0510M	Zener diode	5..5.26V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
5-	-	MM5Z51V	Zener diode	48..54V, Zzt=180Ω, Izt=2mA, 200mW	SOD-523FL	7d	1a	F
5-	-	TCBZX584C51V	Zener diode	48..54V, Izt=2mA, Zzt=180Ω, 200mW	SOD-523FL	7d	1a	Tac
5-	-	TCMM5Z51V	Zener diode	48..54V, Izt=2mA, Zzt=180Ω, 200mW	SOD-523FL	7d	1a	Tac
5.	-	MMSZ5247SPT	Zener diode	17V±5%, Izt=7.4mA, Zzt=19Ω, 225mW	SOD-523	6d	1a	Chm
5.0	-	SMBG5.0	TVS	Vrwm=5.0V, Vbr=6.40..7.55V, 62.5A, 600W(1ms)	DO-215AA	5d	1a	Msc
5.0A	-	1SMC5.0A	TVS	Vbr=6.40..7.07V, Vrwm=5.0V, 163.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
5.0A	-	MMF5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, Ipp=21.7A, 200W(1ms)	SOD-123FL	7d	2m	Sst
5.0A	-	SMAJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 43.5A, 400W(1ms)	DO-214AC	1d	1a	Sus
5.0A	-	SMBG5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms)	DO-215AA	5d	1a	Msc
5.0A	-	SMBJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms)	DO-214AA	1d	1a	Sus
5.0A	-	SMCJ5.0A	TVS	Vrwm=5V, Vbr=6.4..7.25V, 156.3A, 1500W(1ms)	DO-214AB	1d	1k	Sus
5.0A	-	SMF5.0A	TVS	Vbr=6.4..7.0V, Vrwm=5.0V, Ipp=21.7A, 200W(1ms)	SOD-123FL	7d	1a	Mco
5.0C	-	SMBG5.0C	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
5.0CA	-	1SMC5.0CA	TVS	Vbr=6.40..7.07V, Vrwm=5.0V, 163.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
5.0CA	-	MMF5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, Ipp=21.7A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
5.0CA	-	SMAJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 43.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
5.0CA	-	SMBG5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
5.0CA	-	SMBJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
5.0CA	-	SMCJ5.0CA	TVS	Vrwm=5V, Vbr=6.4..7.25V, 156.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
5.0CA	-	SMF5.0CA	TVS	Vbr=6.4..7.0V, Vrwm=5.0V, Ipp=21.7A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
5.1	-	MAZ5051	Zener diode	4.8..5.4V, Zzt=40Ω(5mA), 500mW	MP2	11d	1a	Pan
5.1	-	MAZ80510H	Zener diode	5.14..5.4V, Zzt=60Ω(5mA), 150mW	SC-76	6d	1a	Pan
5.1	-	MAZY051	Zener diode	4.8..5.4V, Zzt=60Ω(20mA), 1W	NMiniP2	1d	1a	Pan
5.1B	-	HZF5.1BP	Zener diode	5.1V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
5.1B	-	PTZ5.1B	Zener diode	5.1V±10%, Izt=40mA, 1W	DO-214AC	1d	1a	Rhm
5.1C	-	HZF5.1CP	Zener diode	5.1V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
5.1G	-	ZD5.1G-CA2	Zener diode	5.1V±5%, Zzt=80Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
5.1G	-	ZD5.1G-CB2	Zener diode	5.1V±5%, Zzt=80Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
5.1L	-	ZD5.1L-CA2	Zener diode	5.1V±5%, Zzt=80Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
5.1L	-	ZD5.1L-CB2	Zener diode	5.1V±5%, Zzt=80Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
5.6	-	MAZ5056	Zener diode	5.3..6V, Zzt=15Ω(5mA), 500mW	MP2	11d	1a	Pan
5.6	-	MAZ80560H	Zener diode	5.66..5.95V, Zzt=40Ω(5mA), 150mW	SC-76	6d	1a	Pan
5.6	-	MAZY056	Zener diode	5.2..6V, Zzt=50Ω(20mA), 1W	NMiniP2	1d	1a	Pan
5.6B	-	HZF5.6BP	Zener diode	5.6V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
5.6B	-	PTZ5.6B	Zener diode	5.6V±10%, Izt=40mA, 1W	DO-214AC	1d	1a	Rhm
5.6C	-	HZF5.6CP	Zener diode	5.6V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
5.6G	-	ZD5.6G-CA2	Zener diode	5.6V±5%, Zzt=60Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
5.6G	-	ZD5.6G-CB2	Zener diode	5.6V±5%, Zzt=60Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
5.6L	-	ZD5.6L-CA2	Zener diode	5.6V±5%, Zzt=60Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
5.6L	-	ZD5.6L-CB2	Zener diode	5.6V±5%, Zzt=60Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
5/5	ac	SD05C	TVS	Vrwm=5V, Vbr=6.2..7.3V, Ipp=24A, 350W(1ms), Bidir.	SOD-323	5ba	1e	Smt
5^	-	MAZS0510H	Zener diode	5.14..5.4V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
5^1	-	MAZ80510H	Zener diode	5.14..5.4V, Zzt=60Ω(5mA), 150mW	SC-76	6d	1a	Pan
5^1	-	MAZ8051GHL	Zener diode	5.14..5.4V, Zzt=60Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5^6	-	MAZ80560H	Zener diode	5.66..5.95V, Zzt=40Ω(5mA), 150mW	SC-76	6d	1a	Pan
5^6	-	MAZ8056GHL	Zener diode	5.66..5.95V, Zzt=40Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
5_	-	MAZS0510L	Zener diode	4.87..5.12V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
5_1	-	MAZ80510L	Zener diode	4.87..5.12V, Zzt=60Ω(5mA), 150mW	SC-76	6d	1a	Pan
5_1	-	MAZ8051GLL	Zener diode	4.87..5.12V, Zzt=60Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
5_6	-	MAZ80560L	Zener diode	5.3..5.58V, Zzt=40Ω(5mA), 150mW	SC-76	6d	1a	Pan
5_6	-	MAZ8056GLL	Zener diode	5.3..5.58V, Zzt=40Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
5<	-	MM5Z75V	Zener diode	70..79V, Zzt=255Ω, Izt=2mA, 200mW	SOD-523FL	7d	1a	F
5<	-	TCBZX584C75V	Zener diode	70..79V, Izt=2mA, Zzt=255Ω, 200mW	SOD-523FL	7d	1a	Tac
5<	-	TCMM5Z75V	Zener diode	70..79V, Izt=2mA, Zzt=255Ω, 200mW	SOD-523FL	7d	1a	Tac
5=	-	MM5Z56V	Zener diode	52..60V, Zzt=200Ω, Izt=2mA, 200mW	SOD-523FL	7d	1a	F
5=	-	TCBZX584C56V	Zener diode	52..60V, Izt=2mA, Zzt=200Ω, 200mW	SOD-523FL	7d	1a	Tac
5=	-	TCMM5Z56V	Zener diode	52..60V, Izt=2mA, Zzt=200Ω, 200mW	SOD-523FL	7d	1a	Tac
5>	-	MM5Z68V	Zener diode	64..72V, Zzt=240Ω, Izt=2mA, 200mW	SOD-523FL	7d	1a	F
5>	-	TCBZX584C68V	Zener diode	64..72V, Izt=2mA, Zzt=240Ω, 200mW	SOD-523FL	7d	1a	Tac
5>	-	TCMM5Z68V	Zener diode	64..72V, Izt=2mA, Zzt=240Ω, 200mW	SOD-523FL	7d	1a	Tac
5•1	-	RKZ5.1B2KG	Zener diode	4.98..5.20V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	2e	Ren
5•1	-	RKZ5.1B2KJ	Zener diode	4.98..5.20V, Izt=5mA, Zzt=130Ω, 150mW	UFP	7d	2e	Ren
5•1	am	HZU5.1B3	Zener diode	5.14..5.37V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	1a	Ren
5•1	an	HZU5.1B2	Zener diode	4.98..5.20V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	1a	Ren
5•1	ao	HZU5.1B1	Zener diode	4.84..5.04V, Izt=5mA, Zzt=130Ω, 200mW	URP	5d	1a	Ren
5•6	-	RKZ5.6B2KG	Zener diode	5.49..5.73V, Izt=5mA, Zzt=80Ω, 200mW	URP	5d	2e	Ren
5•6	-	RKZ5.6B2KJ	Zener diode	5.49..5.73V, Izt=5mA, Zzt=80Ω, 150mW	UFP	7d	2e	Ren
5•6	am	HZU5.6B3	Zener diode	5.67..5.92V, Izt=5mA, Zzt=80Ω, 200mW	URP	5d	1a	Ren
5•6	an	HZU5.6B2	Zener diode	5.49..5.73V, Izt=5mA, Zzt=80Ω, 200mW	URP	5d	1a	Ren
5•6	ao	HZU5.6B1	Zener diode	5.31..5.55V, Izt=5mA, Zzt=80Ω, 200mW	URP	5d	1a	Ren
50	-	HMSZ5250B	Zener diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 225mW	SOD-323	5d	1d	Hsn
50	-	MM5Z2V4	Zener diode	2.2..2.6V, Zzt=100Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
50	-	TCBZX584C2V4	Zener diode	2.2..2.6V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523FL	7d	1a	Tac
50	-	TCMM5Z2V4	Zener diode	2.2..2.6V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523FL	7d	1a	Tac
50	-	ZD5250BS2	Zener diode	20V±5%, 6.2mA, Zzt=25Ω, 500mW	SOD-323	5d	1a	Cys
50	-	ZV950V2TA	C-diode	Hyperabrupt varicap, 12V, 100mA, 9.5..7.8pF(0.5..1.5V)	SOD-523	6d	1a	Zx
500A	-	TVP04A501A-G	TVS	Vbr=475.0..525.0V, Vrwm=427.5V, Ipp=0.58A, 400W(1ms)	DO-214AC	1d	2o	Cmc
500A	-	TVP06B501A-G	TVS	Vrwm=427.5V, Vbr=475.0..525.0V, Ipp=0.87A, 600W(1ms)	DO-214AA	1d	2o	Cmc
500C	-	TVP04A501CA-G	TVS	Vbr=475.0..525.0V, Vrwm=427.5V, Ipp=0.58A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
500C	-	TVP06B501ACA-G	TVS	Vrwm=427.5V, Vbr=475.0..525.0V, Ipp=0.87A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
5010	-	SZ5010	Zener diode	10V±10%, Izt=75mA, Zzt=3.5Ω, 3W	DO-214AC	1d	1a	Eic
5011	-	SZ5011	Zener diode	11V±10%, Izt=68mA, Zzt=4Ω, 3W	DO-214AC	1d	1a	Eic
5012	-	SZ5012	Zener diode	12V±10%, Izt=63mA, Zzt=4.5Ω, 3W	DO-214AC	1d	1a	Eic
5013	-	SZ5013	Zener diode	13V±10%, Izt=58mA, Zzt=4.5Ω, 3W	DO-214AC	1d	1a	Eic
5014	-	SZ5014	Zener diode	14V±10%, Izt=53mA, Zzt=5Ω, 3W	DO-214AC	1d	1a	Eic
5015	-	SZ5015	Zener diode	15V±10%, Izt=50mA, Zzt=5.5Ω, 3W	DO-214AC	1d	1a	Eic
5016	-	SZ5016	Zener diode	16V±10%, Izt=47mA, Zzt=5.5Ω, 3W	DO-214AC	1d	1a	Eic
5017	-	SZ5017	Zener diode	17V±10%, Izt=44mA, Zzt=6Ω, 3W	DO-214AC	1d	1a	Eic
5018	-	SZ5018	Zener diode	18V±10%, Izt=42mA, Zzt=6Ω, 3W	DO-214AC	1d	1a	Eic
5019	-	SZ5019	Zener diode	19V±10%, Izt=40mA, Zzt=7Ω, 3W	DO-214AC	1d	1a	Eic
5020	-	SZ5020	Zener diode	20V±10%, Izt=37mA, Zzt=7Ω, 3W	DO-214AC	1d	1a	Eic
5022	-	SZ5022	Zener diode	22V±10%, Izt=34mA, Zzt=8Ω, 3W	DO-214AC	1d	1a	Eic
5024	-	SZ5024	Zener diode	24V±10%, Izt=31mA, Zzt=9Ω, 3W	DO-214AC	1d	1a	Eic
5027	-	SZ5027	Zener diode	27V±10%, Izt=28mA, Zzt=10Ω, 3W	DO-214AC	1d	1a	Eic
5028	-	SZ5028	Zener diode	28V±10%, Izt=27mA, Zzt=12Ω, 3W	DO-214AC	1d	1a	Eic
5030	-	SZ5030	Zener diode	30V±10%, Izt=25mA, Zzt=16Ω, 3W	DO-214AC	1d	1a	Eic
5033	-	SZ5033	Zener diode	33V±10%, Izt=23mA, Zzt=20Ω, 3W	DO-214AC	1d	1a	Eic
5036	-	SZ5036	Zener diode	36V±10%, Izt=21mA, Zzt=22Ω, 3W	DO-214AC	1d	1a	Eic
5039	-	SZ5039	Zener diode	39V±10%, Izt=19mA, Zzt=28Ω, 3W	DO-214AC	1d	1a	Eic
503J	-	SZ503J	Zener diode	3.9V±10%, Izt=192mA, Zzt=4.5Ω, 3W	DO-214AC	1d	1a	Eic
5043	-	SZ5043	Zener diode	43V±10%, Izt=17mA, Zzt=33Ω, 3W	DO-214AC	1d	1a	Eic
5047	-	SZ5047	Zener diode	47V±10%, Izt=16mA, Zzt=38Ω, 3W	DO-214AC	1d	1a	Eic
504D	-	SZ504D	Zener diode	4.3V±10%, Izt=174mA, Zzt=4.5Ω, 3W	DO-214AC	1d	1a	Eic
504H	-	SZ504H	Zener diode	4.7V±10%, Izt=160mA, Zzt=4Ω, 3W	DO-214AC	1d	1a	Eic
5051	-	SZ5051	Zener diode	51V±10%, Izt=15mA, Zzt=45Ω, 3W	DO-214AC	1d	1a	Eic
5056	-	SZ5056	Zener diode	56V±10%, Izt=13mA, Zzt=50Ω, 3W	DO-214AC	1d	1a	Eic
505B	-	SZ505B	Zener diode	5.1V±10%, Izt=147mA, Zzt=3.5Ω, 3W	DO-214AC	1d	1a	Eic
505G	-	SZ505G	Zener diode	5.6V±10%, Izt=134mA, Zzt=2.5Ω, 3W	DO-214AC	1d	1a	Eic
5062	-	SZ5062	Zener diode	62V±10%, Izt=12mA, Zzt=55Ω, 3W	DO-214AC	1d	1a	Eic
5068	-	SZ5068	Zener diode	68V±10%, Izt=11mA, Zzt=70Ω, 3W	DO-214AC	1d	1a	Eic
506C	-	SZ506C	Zener diode	6.2V±10%, Izt=121mA, Zzt=1.5Ω, 3W	DO-214AC	1d	1a	Eic
506I	-	SZ506I	Zener diode	6.8V±10%, Izt=110mA, Zzt=2Ω, 3W	DO-214AC	1d	1a	Eic
5075	-	SZ5075	Zener diode	75V±10%, Izt=10mA, Zzt=85Ω, 3W	DO-214AC	1d	1a	Eic
507F	-	SZ507F	Zener diode	7.5V±10%, Izt=100mA, Zzt=2Ω, 3W	DO-214AC	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5082	-	SZ5082	Zener diode	82V±10%, Izt=9.1mA, Zzt=95Ω, 3W	DO-214AC	1d	1a	Eic
508C	-	SZ508C	Zener diode	8.2V±10%, Izt=91mA, Zzt=2.3Ω, 3W	DO-214AC	1d	1a	Eic
5091	-	SZ5091	Zener diode	91V±10%, Izt=8.2mA, Zzt=115Ω, 3W	DO-214AC	1d	1a	Eic
509B	-	SZ509B	Zener diode	9.1V±10%, Izt=82mA, Zzt=2.5Ω, 3W	DO-214AC	1d	1a	Eic
50B	-	MMHZ5250BPT	Zener diode	19.0..21.0V, Izt=5mA, Zzt=48Ω, 225mW	SOD-123	5d	1a	Chm
50B	-	SMC5350B	Zener diode	13.0V±5%, Zzt=3.0(100.0mA), Izm=365.0mA, 5W	DO-214AB	1d	1a	Ers
50B0	-	SZ50B0	Zener diode	100V±10%, Izt=7.5mA, Zzt=160Ω, 3W	DO-214AC	1d	1a	Eic
50B1	-	SZ50B1	Zener diode	110V±10%, Izt=6.8mA, Zzt=225Ω, 3W	DO-214AC	1d	1a	Eic
50B2	-	SZ50B2	Zener diode	120V±10%, Izt=6.3mA, Zzt=300Ω, 3W	DO-214AC	1d	1a	Eic
50B3	-	SZ50B3	Zener diode	130V±10%, Izt=5.8mA, Zzt=375Ω, 3W	DO-214AC	1d	1a	Eic
50B4	-	SZ50B4	Zener diode	140V±10%, Izt=5.3mA, Zzt=475Ω, 3W	DO-214AC	1d	1a	Eic
50B5	-	SZ50B5	Zener diode	150V±10%, Izt=5mA, Zzt=550Ω, 3W	DO-214AC	1d	1a	Eic
50B6	-	SZ50B6	Zener diode	160V±10%, Izt=4.7mA, Zzt=625Ω, 3W	DO-214AC	1d	1a	Eic
50B7	-	SZ50B7	Zener diode	170V±10%, Izt=4.4mA, Zzt=650Ω, 3W	DO-214AC	1d	1a	Eic
50B8	-	SZ50B8	Zener diode	180V±10%, Izt=4.2mA, Zzt=700Ω, 3W	DO-214AC	1d	1a	Eic
50B9	-	SZ50B9	Zener diode	190V±10%, Izt=4mA, Zzt=800Ω, 3W	DO-214AC	1d	1a	Eic
50D0	-	SZ50D0	Zener diode	200V±10%, Izt=3.7mA, Zzt=875Ω, 3W	DO-214AC	1d	1a	Eic
50DPH	-	BYG50D	Si-diode	Controlled avalanche rectifier, 200V, 1A, Vf<0.85V(1A), 2µs	DO-214AC	1d	1a	Phi
50GPH	-	BYG50G	Si-diode	Controlled avalanche rectifier, 400V, 1A, Vf<0.85V(1A), 2µs	DO-214AC	1d	1a	Phi
50JPH	-	BYG50J	Si-diode	Controlled avalanche rectifier, 600V, 1A, Vf<0.85V(1A), 2µs	DO-214AC	1d	1a	Phi
50KPH	-	BYG50K	Si-diode	Controlled avalanche rectifier, 800V, 1A, Vf<0.85V(1A), 2µs	DO-214AC	1d	1a	Phi
50MPH	-	BYG50M	Si-diode	Controlled avalanche rectifier, 1000V, 1A, Vf<0.85V(1A), 2µs	DO-214AC	1d	1a	Phi
50S	-	MMHZ5250SPT	Zener diode	19.60..20.40V, Izt=5mA, Zzt=48Ω, 225mW	SOD-123	5d	1a	Chm
51	-	CDZ55C51	Zener diode	48.45..53.55V, Zzt=125Ω, Izt=2.25mA, 500mW	1206	70d	2d	Crp
51	-	CDZ55C51S	Zener diode	48.45..53.55V, Zzt=125Ω, Izt=2.25mA, 500mW	0805	70d	2d	Crp
51	-	CDZ55C51T	Zener diode	48.45..53.55V, Zzt=125Ω, Izt=2.25mA, 200mW	0603	70d	2d	Crp
51	-	CMZ51	Zener diode	51V±5%, Izt=6mA, 2W	M-FLAT	7d	1a	Tos
51	-	CZRNC55C51-G	Zener diode	48.45..53.55V, Zt=125Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
51	-	HMSZ5251B	Zener diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 225mW	SOD-323	5d	1d	Hsn
51	-	HZC5.1	Zener diode	5.1V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
51	-	HZU5.1G	Zener diode	4.84..5.37V, Izt=5mA, 200mW	SOD-323	5d	1a	Ren
51	-	KDZ5.1EV	Zener diode	4.8..5.4V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
51	-	KDZ5.1V	Zener diode	4.8..5.4V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
51	-	MAZY510	Zener diode	45.9..56.1V, Zzt=65Ω(5mA), 1W	NMiniP2	1d	1a	Pan
51	-	MM5Z2V7	Zener diode	2.5..2.9V, Zzt=100Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
51	-	MMPZ5262SPT	Zener diode	49.98..52.02V, Izt=2.5mA, Zzt=125Ω, 225mW	SOD-323	5d	1a	Chm
51	-	P4SMA51	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 5.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
51	-	P6SMBJ51	TVS	Vrwm=51V, Vbr=45.9..56.1V, 8.2A, 600W(1ms)	DO-214AA	1d	1n	Lif
51	-	SMBG51	TVS	Vrwm=51V, Vbr=56.7..71.8V, 6.6A, 600W(1ms)	DO-215AA	5d	1a	Msc
51	-	SML4757	Zener diode	51V±5%, Izt=5mA, Zzt=95Ω, 1W	DO-214AC	1d	1k	Vs
51	-	TCBZX584C2V7	Zener diode	2.5..2.9V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523FL	7d	1a	Tac
51	-	TCMM5Z2V7	Zener diode	2.5..2.9V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523FL	7d	1a	Tac
51	-	TZD5.1WS	Zener diode	4.80..5.40V, Izt=5mA, Zzt=70Ω, 200mW	SOD-323	5d	1a	Ttr
51	-	TZD5.1WT	Zener diode	4.80..5.40V, Izt=5mA, Zzt=70Ω, 150mW	SOD-523	6d	1a	Ttr
51	-	U1ZB51	Zener diode	45.9..56.1, Izt=6mA, 1W	3-4D1A	1d	2fa	Tos
51	-	USFZ5.1V	Zener diode	5.1V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
51	-	ZD5251BS2	Zener diode	22V±5%, 5.6mA, Zzt=29Ω, 500mW	SOD-323	5d	1a	Cys
5-1	-	MAZ80510M	Zener diode	5..5.26V, Zzt=60Ω(5mA), 150mW	SC-76	6d	1a	Pan
5-1	-	MAZ8051GML	Zener diode	5..5.26V, Zzt=60Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
51•	-	TZD5.1YWS	Zener diode	4.98..5.20V, Izt=5mA, Zzt=70Ω, 200mW	SOD-323	5d	1a	Ttr
51•	-	TZD5.1YWT	Zener diode	4.98..5.20V, Izt=5mA, Zzt=70Ω, 150mW	SOD-523	6d	1a	Ttr
510	-	F1C510	TVS	Vrwm=8V, 35A, 500W(1ms)	DO-214AC	1d	1i	Org
510A	-	1.5SMC510A	TVS	Vrwm=434.0V, Vbr=434..485V, Ipp=2.1A, 1500W(1ms)	DO-214AB	1d	1b	Mde
510A	-	1.5SMC510A	TVS	Vrwm=434.0V, Vbr=434..485V, Ipp=2.1A, 1500W(1ms)	DO-214AB	1d	1k	Vs
510A	-	1.5SMC510A	TVS	Vrwm=434.0V, Vbr=434..485V, Ipp=2.1A, 1500W(1ms)	DO-214AB	1d	2s	Lif
510A	-	P4SMA510A	TVS	Vbr=485..535V, Vrwm=480V, 0.43A, 400W (1ms)	DO-214AC	1d	1k	Vs
510A	-	P6SMA510A	TVS	Vbr=485..535V, Vrwm=434V, 0.86A, 600W(1ms)	DO-214AC	1d	1a	Eic
510A	-	P6SMB510A	TVS	Vrwm=510V, Vbr=485..535, 0.86A, 600W(1ms)	DO-214AA	1d	1k	Vs
510A	-	SMAJP4KE510A	TVS	Vrwm=434.0V, Vbr=485.0..535.0V, Ipp=0.6A, 400W(1ms)	DO-214AC	1d	1a	Mco
510A	-	SMBJP6KE510A	TVS	Vrwm=434.0V, Vbr=485.0..535.0V, Ipp=0.9A, 600W(1ms)	DO-214AA	1d	1a	Mco
510A	-	SMCJ1.5KE510A	TVS	Vrwm=434.0V, Vbr=485.0..535.0V, Ipp=2.1A, 1500W(1ms)	DO-214AB	1d	1a	Mco
510C	-	1.5SMC510CA	TVS	Vrwm=434.0V, Vbr=434..485V, Ipp=2.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Fee
510C	-	1.5SMC510CA	TVS	Vrwm=434.0V, Vbr=434..485V, Ipp=2.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
510C	-	1.5SMC510CA	TVS	Vrwm=434.0V, Vbr=434..485V, Ipp=2.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
510C	-	SMAJP4KE510CA	TVS	Vrwm=434.0V, Vbr=485.0..535.0V, Ipp=0.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
510C	-	SMBJP6KE510CA	TVS	Vrwm=434.0V, Vbr=485.0..535.0V, Ipp=0.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
510C	-	SMCJ1.5KE510CA	TVS	Vrwm=434.0V, Vbr=485.0..535.0V, Ipp=2.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
510CA	-	P6SMA510CA	TVS	Vbr=485..535V, Vrwm=434V, 0.86A, 600W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
512	-	F1C512	TVS	Vrwm=9.6V, 30A, 500W(1ms)	DO-214AC	1d	1i	Org
516	-	F1C516	TVS	Vrwm=12.5V, 22A, 500W(1ms)	DO-214AC	1d	1i	Org

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
518	-	F1C518	TVS	Vrwm=14.5V, 20A, 500W(1ms)	DO-214AC	1d	1i	Org
51A	-	1.5SMC51A	TVS	Vrwm=43.6V, Vbr=48.5..53.6V, Ipp=21.4A, 1500W(1ms)	403	3d	2t	Ons
51A	-	1.5SMC51A	TVS	Vrwm=43.6V, Vbr=48.5..53.6V, Ipp=21.4A, 1500W(1ms)	DO-214AB	1d	1b	Mde
51A	-	1.5SMC51A	TVS	Vrwm=43.6V, Vbr=48.5..53.6V, Ipp=21.4A, 1500W(1ms)	DO-214AB	1d	1k	Vs
51A	-	1.5SMC51A	TVS	Vrwm=43.6V, Vbr=48.5..53.6V, Ipp=21.4A, 1500W(1ms)	DO-214AB	1d	2s	Lif
51A	-	1SMC51A	TVS	Vbr=56.7..62.7V, Vrwm=51V, 18.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
51A	-	MMF51A	TVS	Vrwm=51V, Vbr=56.7..65.2V, Ipp=2.4A, 200W(1ms)	SOD-123FL	7d	2m	Sst
51A	-	P4SMA51A	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
51A	-	P4SMA51A	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 400W(1ms)	DO-214AC	1d	1k	Vs
51A	-	P6SMB51A	TVS	Vrwm=51V, Vbr=48.5..53.6V, 8.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
51A	-	P6SMB51A	TVS	Vrwm=51V, Vbr=48.5..53.6V, 8.6A, 600W(1ms)	403A	3d	1s	Ons
51A	-	P6SMBJ51A	TVS	Vrwm=51V, Vbr=45.9..56.1V, 8.6A, 600W(1ms)	DO-214AA	1d	1n	Lif
51A	-	SMAJ51A	TVS	Vrwm=51V, Vbr=56.7..62.7V, 4.9A, 400W(1ms)	DO-214AC	1d	1a	Sus
51A	-	SMAJP4KE51A	TVS	Vrwm=43.60V, Vbr=48.50..53.60V, Ipp=5.8A, 400W(1ms)	DO-214AC	1d	1a	Mco
51A	-	SMBG51A	TVS	Vrwm=51V, Vbr=56.7..65.2V, 7.3A, 600W(1ms)	DO-215AA	5d	1a	Msc
51A	-	SMBJ51A	TVS	Vrwm=51V, Vbr=56.7..65.2V, 7.3A, 600W(1ms)	DO-214AA	1d	1a	Sus
51A	-	SMBJP6KE51A	TVS	Vrwm=43.60V, Vbr=48.50..53.60V, Ipp=8.7A, 600W(1ms)	DO-214AA	1d	1a	Mco
51A	-	SMCJ1.5KE51A	TVS	Vrwm=43.60V, Vbr=48.50..53.60V, Ipp=21.7A, 1500W(1ms)	DO-214AB	1d	1a	Mco
51A	-	SMCJ51A	TVS	Vrwm=51V, Vbr=56.7..65.2V, 16.5A, 1500W(1ms)	DO-214AB	1d	1k	Sus
51A	-	SMF51A	TVS	Vbr=56.7..62.7V, Vrwm=51V, Ipp=2.4A, 200W(1ms)	SOD-123FL	7d	1a	Mco
51A	-	SZP6SMB51A	TVS	Vrwm=51V, Vbr=48.5..53.6V, 8.6A, 600W(1ms)	403A	3d	1s	Ons
51A	-	TVP04A510A-G	TVS	Vbr=48.45..53.55V, Vrwm=43.6V, Ipp=5.71A, 400W(1ms)	DO-214AC	1d	2o	Cmc
51A	-	TVP06B51A-G	TVS	Vrwm=43.6V, Vbr=48.45..53.55V, Ipp=8.56A, 600W(1ms)	DO-214AA	1d	2o	Cmc
51A	-	UMA51A	TVS	Vrwm=51V, Vbr=56.7..82.4V, 6.1A, 500W(1ms)	UltraMite	14d	1v	Msc
51B	-	1SMB3EZ51	Zener diode	51V±5%, Zzt=48Ω, Izt=15mA, 3W	DO-214AA	1d	1a	Pjt
51B	-	MMHZ5251BPT	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 225mW	SOD-123	5d	1a	Chm
51B	-	SMC5351B	Zener diode	14.0V±5%, Zzt=3.0(100.0mA), Izm=340.0mA, 5W	DO-214AB	1d	1a	Ers
51B	-	Z3SMB51B	Zener diode	48.45..53.55V, Izt=15mA, Zzt=45Ω, 3W	DO-214AA	1d	1a	Ttr
51C	-	1.5SMC51CA	TVS	Vrwm=43.6V, Vbr=48.5..53.6V, Ipp=21.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
51C	-	1.5SMC51CA	TVS	Vrwm=43.6V, Vbr=48.5..53.6V, Ipp=21.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
51C	-	1.5SMC51CA	TVS	Vrwm=43.6V, Vbr=48.5..53.6V, Ipp=21.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
51C	-	F1C5120	TVS	Vrwm=96V, 3A, 500W(1ms)	DO-214AC	1d	1i	Org
51C	-	P4SMA51C	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 5.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
51C	-	P4SMA51CA	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
51C	-	P6SMB51CA	TVS	Vrwm=51V, Vbr=48.5..53.6V, 8.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
51C	-	P6SMBJ51C	TVS	Vrwm=51V, Vbr=45.9..56.1V, 8.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
51C	-	SMAJP4KE51CA	TVS	Vrwm=43.60V, Vbr=48.50..53.60V, Ipp=5.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
51C	-	SMBG51C	TVS	Vrwm=51V, Vbr=56.7..71.8V, 6.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
51C	-	SMBJP6KE51CA	TVS	Vrwm=43.60V, Vbr=48.50..53.60V, Ipp=8.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
51C	-	SMCJ1.5KE51CA	TVS	Vrwm=43.60V, Vbr=48.50..53.60V, Ipp=21.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
51C	-	TVP04A510CA-G	TVS	Vbr=48.45..53.55V, Vrwm=43.6V, Ipp=5.71A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
51C	-	TVP06B51ACA-G	TVS	Vrwm=43.6V, Vbr=48.45..53.55V, Ipp=8.56A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
51CA	-	1SMC51CA	TVS	Vbr=56.7..62.7V, Vrwm=51V, 18.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
51CA	-	MMF51CA	TVS	Vrwm=51V, Vbr=56.7..65.2V, Ipp=2.4A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
51CA	-	P4SMA51CA	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
51CA	-	P6SMB51CA	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 8.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
51CA	-	P6SMBJ51CA	TVS	Vrwm=51V, Vbr=45.9..56.1V, 8.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
51CA	-	SMAJ51CA	TVS	Vrwm=51V, Vbr=56.7..62.7V, 4.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
51CA	-	SMBG51CA	TVS	Vrwm=51V, Vbr=56.7..65.2V, 7.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
51CA	-	SMBJ51CA	TVS	Vrwm=51V, Vbr=56.7..65.2V, 7.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
51CA	-	SMCJ51CA	TVS	Vrwm=51V, Vbr=56.7..65.2V, 16.5A, 1500W(1ms), Bidir.	DO-214AB	1d	1k	Sus
51CA	-	SMF51CA	TVS	Vbr=56.7..62.7V, Vrwm=51V, Ipp=2.4, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
51CA	-	UMA51CA	TVS	Vrwm=51V, Vbr=56.7..82.4V, 6.1A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
51P	-	BZD27C51P	Zener diode	48.45..53.55V, Zzt=60Ω, Izt=10mA, 800mW	SOD-123FL	7d	1a	Pjt
51P	-	MFPZ51	Zener diode	48.45..53.55V, Izt=10mA, Zzt=60Ω, 800mW	SOD-123FL	7d	1a	Ttr
51S	-	MMHZ5251SPT	Zener diode	21.56..22.44V, Izt=5mA, Zzt=55Ω, 225mW	SOD-123	5d	1a	Chm
51V	-	SMA51	TVS	Vbr=56.7..69.3V, Vrwm=51.0V, 3.3A, 300W(1ms)	DO-214AC	1d	1a	Mic
51V	-	SMB51	TVS	Vbr=56.7..69.3V, Vrwm=51V, 6.6A, 600W(1ms)	DO-214AA	1d	1a	Mic
51V	-	SMC51	TVS	Vbr=56.7..69.3V, Vrwm=51V, 16.5A, 1500W(1ms),	DO-214AB	1d	1a	Mic
51VA	-	SMA51A	TVS	Vbr=56.7..62.7V, Vrwm=51.0V, 3.6A, 300W(1ms)	DO-214AC	1d	1a	Mic
51VA	-	SMB51A	TVS	Vbr=56.7..62.7V, Vrwm=51V, 7.3A, 600W(1ms)	DO-214AA	1d	1a	Mic
51VA	-	SMC51A	TVS	Vbr=56.7..62.7V, Vrwm=51V, 18.2A, 1500W(1ms),	DO-214AB	1d	1a	Mic
51VB	-	BZT52B51	Zener diode	49.98..52.02V, Izt=2mA, Zzt=180Ω, 500mW	SOD-123FL	7d	1a	Tsc
51VB	-	MMSZ51VBW	Zener diode	49.98..52.02V, Izt=2mA, Zzt=180Ω, 500mW	SOD-123FL	7d	1a	Tac
51VC	-	SMA51C	TVS	Vbr=56.7..69.3V, Vrwm=51.0V, 3.3A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
51VC	-	SMB51C	TVS	Vbr=56.7..69.3V, Vrwm=51V, 6.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
51VC	-	SMC51C	TVS	Vbr=56.7..69.3V, Vrwm=51V, 16.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
51VCA	-	SMA51CA	TVS	Vbr=56.7..62.7V, Vrwm=51.0V, 3.6A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
51VCA	-	SMB51CA	TVS	Vbr=56.7..62.7V, Vrwm=51V, 7.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
51VCA	-	SMC51CA	TVS	Vbr=56.7..62.7V, Vrwm=51V, 18.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
51VZ	-	BZT52C51	Zener diode	48.45..53.55V, Izt=2mA, Zzt=180Ω, 500mW	SOD-123FL	7d	1a	Tsc
51VZ	-	MMSZ51VCW	Zener diode	48.45..53.55V, Izt=2mA, Zzt=180Ω, 500mW	SOD-123FL	7d	1a	Tac
51VZ	-	TCMMSZ51V	Zener diode	51V±5%, Izt=5mA, Zzt=169Ω, 500mW	SOD-123FL	7d	1a	Tac
51VZ	-	ZGFM0551C-MH	Zener diode	48.45..53.55V, Izt=5mA, Zzt=169Ω, 500mW	SOD-123	5d	1a	Pic
52	-	FDZ3.3VT	Zener diode	3.320..3.530V, Izt=5mA, Zzt=120Ω, 200mW	SOD-323	5d	1a	Fis
52	-	GDZ3V3B-V	Zener diode	3.32..3.53V, Izt=5mA, Zzt=120Ω, 200mW	SOD-323	5d	2m	Vs
52	-	HMSZ5252B	Zener diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 225mW	SOD-323	5d	1d	Hsn
52	-	LBZT52B3V3T1G	Zener diode	3.32..3.53V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
52	-	LEDZ3.3BT1G	Zener diode	3.32..3.53V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
52	-	LUDZS3.3BT1G	Zener diode	3.32..3.53V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
52	-	MM5Z3V0	Zener diode	2.8..3.2V, Zzt=100Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
52	-	TCBZX584C3V0	Zener diode	2.8..3.2V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523FL	7d	1a	Tac
52	-	TCMM5Z3V0	Zener diode	2.8..3.2V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523FL	7d	1a	Tac
52	-	UDZS3.3B	Zener diode	3.32..3.53V, Izt=5mA, Zzt=120Ω, 200mW	SOD-323	5d	1a	Wtr
52	-	ZD5252BS2	Zener diode	24V±5%, 5.2mA, Zzt=33Ω, 500mW	SOD-323	5d	1a	Cys
52	-	ZV952V2TA	C-diode	Hyperabrupt varicap, 12V, 100mA, 19..15.7pF(0.5..1.5V)	SOD-523	6d	1a	Zx
520A	-	TVP04A521A-G	TVS	Vbr=494.0..546.0V, Vrwm=444.6V, Ipp=0.56A, 400W(1ms)	DO-214AC	1d	2o	Cmc
520A	-	TVP06B521A-G	TVS	Vrwm=444.6V, Vbr=494.0..546.0V, Ipp=0.84A, 600W(1ms)	DO-214AA	1d	2o	Cmc
520C	-	TVP04A521CA-G	TVS	Vbr=494.0..546.0V, Vrwm=444.6V, Ipp=0.56A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
520C	-	TVP06B521ACA-G	TVS	Vrwm=444.6V, Vbr=494.0..546.0V, Ipp=0.84A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
527	-	F1C527	TVS	Vrwm=21.6V, 13A, 500W(1ms)	DO-214AC	1d	1i	Org
52B	-	MMHZ5252BPT	Zener diode	22.80..25.20V, Izt=5mA, Zzt=62Ω, 225mW	SOD-123	5d	1a	Chm
52B	-	SMC5352B	Zener diode	15.0V±5%, Zzt=3.0(75.0mA), Izm=315.0mA, 5W	DO-214AB	1d	1a	Ers
52S	-	MMHZ5252SPT	Zener diode	23.52..24.48V, Izt=5mA, Zzt=62Ω, 225mW	SOD-123	5d	1a	Chm
53	-	CMZ53	Zener diode	53V±5%, Izt=5mA, 2W	M-FLAT	7d	1a	Tos
53	-	HMSZ5253B	Zener diode	25V±5%, Izt=5mA, Zzt=35Ω, 225mW	SOD-323	5d	1d	Hsn
53	-	MM5Z3V3	Zener diode	3.1..3.5V, Zzt=95Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
53	-	TCBZX584C3V3	Zener diode	3.1..3.5V, Izt=5mA, Zzt=95Ω, 200mW	SOD-523FL	7d	1a	Tac
53	-	TCMM5Z3V3	Zener diode	3.1..3.5V, Izt=5mA, Zzt=95Ω, 200mW	SOD-523FL	7d	1a	Tac
53	-	ZD5253BS2	Zener diode	25V±5%, 5mA, Zzt=35Ω, 500mW	SOD-323	5d	1a	Cys
53	-	ZV953V2TA	C-diode	Hyperabrupt varicap, 12V, 100mA, 45..37pF(0.5..1.5V)	SOD-523	6d	1a	Zx
530A	-	1.5SMC530A	TVS	Vrwm=450.0V, Vbr=450..503V, Ipp=2.1A, 1500W(1ms)	DO-214AB	1d	2s	Lif
530A	-	1.5SMC530A	TVS	Vrwm=450.0V, Vbr=450..503V, Ipp=2.1A, 1500W(1ms)	DO-214AB	1d	1b	Mde
530A	-	1.5SMC530A	TVS	Vrwm=450.0V, Vbr=450..503V, Ipp=2.1A, 1500W(1ms)	DO-214AB	1d	1a	Fee
530A	-	SMAJP4KE530A	TVS	Vrwm=477.0V, Vbr=503.5..556.50V, Ipp=0.6A, 400W(1ms)	DO-214AC	1d	1a	Mco
530A	-	SMBJP6KE530A	TVS	Vrwm=477.0V, Vbr=503.50..556.5V, Ipp=0.8A, 600W(1ms)	DO-214AA	1d	1a	Mco
530A	-	SMCJ1.5KE530A	TVS	Vrwm=477.0V, Vbr=503.50..556.50V, Ipp=2.1A, 1500W(1ms)	DO-214AB	1d	1a	Mco
530C	-	1.5SMC530CA	TVS	Vrwm=450.0V, Vbr=450..503V, Ipp=2.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
530C	-	1.5SMC530CA	TVS	Vrwm=450.0V, Vbr=450..503V, Ipp=2.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
530C	-	1.5SMC530CA	TVS	Vrwm=477.0V, Vbr=503.5..556.5V, 2.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Fee
530C	-	SMAJP4KE530CA	TVS	Vrwm=477.0V, Vbr=503.5..556.5V, Ipp=0.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
530C	-	SMBJP6KE530CA	TVS	Vrwm=477.0V, Vbr=503.5..556.50V, Ipp=0.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
530C	-	SMCJ1.5KE530CA	TVS	Vrwm=477.0V, Vbr=503.50..556.5V, Ipp=2.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
5333A	-	SMBG5333A	Zener diode	3.3V±10%, Izt=380mA, Zzt=3Ω, 5W	DO-215AA	5d	1a	Msc
5333A	-	SMBJ5333A	Zener diode	3.3V±10%, Izt=380mA, Zzt=3Ω, 5W	DO-214AA	1d	1a	Msc
5333B	-	SMBG5333B	Zener diode	3.3V±5%, Izt=380mA, Zzt=3Ω, 5W	DO-215AA	5d	1a	Msc
5333B	-	SMBJ5333B	Zener diode	3.3V±5%, Izt=380mA, Zzt=3Ω, 5W	DO-214AA	1d	1a	Msc
5334A	-	SMBG5334A	Zener diode	3.6V±10%, Izt=350mA, Zzt=2Ω, 5W	DO-215AA	5d	1a	Msc
5334A	-	SMBJ5334A	Zener diode	3.6V±10%, Izt=350mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Msc
5334B	-	SMBG5334B	Zener diode	3.6V±5%, Izt=350mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5334B	-	SMBJ5334B	Zener diode	3.6V±5%, Izt=350mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc
5335A	-	SMBG5335A	Zener diode	3.9V±10%, Izt=320mA, Zzt=2Ω, 5W	DO-215AA	5d	1a	Msc
5335A	-	SMBJ5335A	Zener diode	3.9V±10%, Izt=320mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Msc
5335B	-	SMBG5335B	Zener diode	3.9V±5%, Izt=320mA, Zzt=2Ω, 5W	DO-215AA	5d	1a	Msc
5335B	-	SMBJ5335B	Zener diode	3.9V±5%, Izt=320mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Msc
5336A	-	SMBG5336A	Zener diode	4.3V±10%, Izt=290mA, Zzt=2Ω, 5W	DO-215AA	5d	1a	Msc
5336A	-	SMBJ5336A	Zener diode	4.3V±10%, Izt=290mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Msc
5336B	-	SMBG5336B	Zener diode	4.3V±5%, Izt=290mA, Zzt=2Ω, 5W	DO-215AA	5d	1a	Msc
5336B	-	SMBJ5336B	Zener diode	4.3V±5%, Izt=290mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Msc
5337A	-	SMBG5337A	Zener diode	4.7V±10%, Izt=260mA, Zzt=2Ω, 5W	DO-215AA	5d	1a	Msc
5337A	-	SMBJ5337A	Zener diode	4.7V±10%, Izt=260mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Msc
5337B	-	SMBG5337B	Zener diode	4.7V±5%, Izt=260mA, Zzt=2Ω, 5W	DO-215AA	5d	1a	Msc
5337B	-	SMBJ5337B	Zener diode	4.7V±5%, Izt=260mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Msc
5338A	-	SMBG5338A	Zener diode	5.1V±10%, Izt=240mA, Zzt=1.5Ω, 5W	DO-215AA	5d	1a	Msc
5338A	-	SMBJ5338A	Zener diode	5.1V±10%, Izt=240mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1a	Msc
5338B	-	SMB5338B	Zener diode	5.1V±5%, 240mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1t	Exc
5338B	-	SMBG5338B	Zener diode	5.1V±5%, Izt=240mA, Zzt=1Ω, 5W	DO-215AA	5d	1a	Msc
5338B	-	SMBJ5338B	Zener diode	5.1V±5%, Izt=240mA, Zzt=1Ω, 5W	DO-214AA	1d	1a	Msc
5339A	-	SMBG5339A	Zener diode	5.6V±10%, Izt=220mA, Zzt=1Ω, 5W	DO-215AA	5d	1a	Msc
5339A	-	SMBJ5339A	Zener diode	5.6V±10%, Izt=220mA, Zzt=1Ω, 5W	DO-214AA	1d	1a	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5339B	-	SMB5339B	Zener diode	5.6V±5%, 220mA, Zzt=1Ω, 5W	DO-214AA	1d	1t	Exc
5339B	-	SMBG5339B	Zener diode	5.6V±5%, Izt=220mA, Zzt=1Ω, 5W	DO-215AA	5d	1a	Msc
5339B	-	SMBJ5339B	Zener diode	5.6V±5%, Izt=220mA, Zzt=1Ω, 5W	DO-214AA	1d	1a	Msc
5340A	-	SMBG5340A	Zener diode	6.0V±10%, Izt=200mA, Zzt=1Ω, 5W	DO-215AA	5d	1a	Msc
5340A	-	SMBJ5340A	Zener diode	6.0V±10%, Izt=200mA, Zzt=1Ω, 5W	DO-214AA	1d	1a	Msc
5340B	-	SMB5340B	Zener diode	6.0V±5%, 200mA, Zzt=1Ω, 5W	DO-214AA	1d	1t	Exc
5340B	-	SMBG5340B	Zener diode	6.0V±5%, Izt=200mA, Zzt=1Ω, 5W	DO-215AA	5d	1a	Msc
5340B	-	SMBJ5340B	Zener diode	6.0V±5%, Izt=200mA, Zzt=1Ω, 5W	DO-214AA	1d	1a	Msc
5341A	-	SMBG5341A	Zener diode	6.2V±10%, Izt=200mA, Zzt=1Ω, 5W	DO-215AA	5d	1a	Msc
5341A	-	SMBJ5341A	Zener diode	6.2V±10%, Izt=200mA, Zzt=1Ω, 5W	DO-214AA	1d	1a	Msc
5341B	-	SMB5341B	Zener diode	6.2V±5%, 200mA, Zzt=1Ω, 5W	DO-214AA	1d	1t	Exc
5341B	-	SMBG5341B	Zener diode	6.2V±5%, Izt=200mA, Zzt=1Ω, 5W	DO-215AA	5d	1a	Msc
5341B	-	SMBJ5341B	Zener diode	6.2V±5%, Izt=200mA, Zzt=1Ω, 5W	DO-214AA	1d	1a	Msc
5342A	-	SMBG5342A	Zener diode	6.8V±10%, Izt=175mA, Zzt=1Ω, 5W	DO-215AA	5d	1a	Msc
5342A	-	SMBJ5342A	Zener diode	6.8V±10%, Izt=175mA, Zzt=1Ω, 5W	DO-214AA	1d	1a	Msc
5342B	-	SMB5342B	Zener diode	6.8V±5%, 175mA, Zzt=1Ω, 5W	DO-214AA	1d	1t	Exc
5342B	-	SMBG5342B	Zener diode	6.8V±5%, Izt=175mA, Zzt=1Ω, 5W	DO-215AA	5d	1a	Msc
5342B	-	SMBJ5342B	Zener diode	6.8V±5%, Izt=175mA, Zzt=1Ω, 5W	DO-214AA	1d	1a	Msc
5343A	-	SMBG5343A	Zener diode	7.5V±10%, Izt=175mA, Zzt=1.5Ω, 5W	DO-215AA	5d	1a	Msc
5343A	-	SMBJ5343A	Zener diode	7.5V±10%, Izt=175mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1a	Msc
5343B	-	SMB5343B	Zener diode	7.5V±5%, 175mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1t	Exc
5343B	-	SMBG5343B	Zener diode	7.5V±5%, Izt=175mA, Zzt=1.5Ω, 5W	DO-215AA	5d	1a	Msc
5343B	-	SMBJ5343B	Zener diode	7.5V±5%, Izt=175mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1a	Msc
5344A	-	SMBG5344A	Zener diode	8.2V±10%, Izt=150mA, Zzt=1.5Ω, 5W	DO-215AA	5d	1a	Msc
5344A	-	SMBJ5344A	Zener diode	8.2V±10%, Izt=150mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1a	Msc
5344B	-	SMB5344B	Zener diode	8.2V±5%, 150mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1t	Exc
5344B	-	SMBG5344B	Zener diode	8.2V±5%, Izt=150mA, Zzt=1.5Ω, 5W	DO-215AA	5d	1a	Msc
5344B	-	SMBJ5344B	Zener diode	8.2V±5%, Izt=150mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1a	Msc
5345A	-	SMBG5345A	Zener diode	8.7V±10%, Izt=150mA, Zzt=2Ω, 5W	DO-215AA	5d	1a	Msc
5345A	-	SMBJ5345A	Zener diode	8.7V±10%, Izt=150mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Msc
5345B	-	SMB5345B	Zener diode	8.7V±5%, 150mA, Zzt=2Ω, 5W	DO-214AA	1d	1t	Exc
5345B	-	SMBG5345B	Zener diode	8.7V±5%, Izt=150mA, Zzt=2Ω, 5W	DO-215AA	5d	1a	Msc
5345B	-	SMBJ5345B	Zener diode	8.7V±5%, Izt=150mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Msc
5346A	-	SMBG5346A	Zener diode	9.1V±10%, Izt=150mA, Zzt=2Ω, 5W	DO-215AA	5d	1a	Msc
5346A	-	SMBJ5346A	Zener diode	9.1V±10%, Izt=150mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Msc
5346B	-	SMB5346B	Zener diode	9.1V±5%, 150mA, Zzt=2Ω, 5W	DO-214AA	1d	1t	Exc
5346B	-	SMBG5346B	Zener diode	9.1V±5%, Izt=150mA, Zzt=2Ω, 5W	DO-215AA	5d	1a	Msc
5346B	-	SMBJ5346B	Zener diode	9.1V±5%, Izt=150mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Msc
5347A	-	SMBG5347A	Zener diode	10V±10%, Izt=125mA, Zzt=2Ω, 5W	DO-215AA	5d	1a	Msc
5347A	-	SMBJ5347A	Zener diode	10V±10%, Izt=125mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Msc
5347B	-	SMB5347B	Zener diode	10V±5%, 125mA, Zzt=2Ω, 5W	DO-214AA	1d	1t	Exc
5347B	-	SMBG5347B	Zener diode	10V±5%, Izt=125mA, Zzt=2Ω, 5W	DO-215AA	5d	1a	Msc
5347B	-	SMBJ5347B	Zener diode	10V±5%, Izt=125mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Msc
5348A	-	SMBG5348A	Zener diode	11V±10%, Izt=125mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5348A	-	SMBJ5348A	Zener diode	11V±10%, Izt=125mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc
5348B	-	SMB5348B	Zener diode	11V±5%, 125mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1t	Exc
5348B	-	SMBG5348B	Zener diode	11V±5%, Izt=125mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5348B	-	SMBJ5348B	Zener diode	11V±5%, Izt=125mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc
5349A	-	SMBG5349A	Zener diode	12V±10%, Izt=100mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5349A	-	SMBJ5349A	Zener diode	12V±10%, Izt=100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc
5349B	-	SMB5349B	Zener diode	12V±5%, 100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1t	Exc
5349B	-	SMBG5349B	Zener diode	12V±5%, Izt=100mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5349B	-	SMBJ5349B	Zener diode	12V±5%, Izt=100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc
5350A	-	SMBG5350A	Zener diode	13V±10%, Izt=100mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5350A	-	SMBJ5350A	Zener diode	13V±10%, Izt=100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc
5350B	-	SMB5350B	Zener diode	13V±5%, 100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1t	Exc
5350B	-	SMBG5350B	Zener diode	13V±5%, Izt=100mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5350B	-	SMBJ5350B	Zener diode	13V±5%, Izt=100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc
5351A	-	SMBG5351A	Zener diode	14V±10%, Izt=100mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5351A	-	SMBJ5351A	Zener diode	14V±10%, Izt=100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc
5351B	-	SMB5351B	Zener diode	14V±5%, 100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1t	Exc
5351B	-	SMBG5351B	Zener diode	14V±5%, Izt=100mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5351B	-	SMBJ5351B	Zener diode	14V±5%, Izt=100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc
5352A	-	SMBG5352A	Zener diode	15V±10%, Izt=75mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5352A	-	SMBJ5352A	Zener diode	15V±10%, Izt=75mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc
5352B	-	SMB5352B	Zener diode	15V±5%, 75mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1t	Exc
5352B	-	SMBG5352B	Zener diode	15V±5%, Izt=75mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5352B	-	SMBJ5352B	Zener diode	15V±5%, Izt=75mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc
5353A	-	SMBG5353A	Zener diode	16V±10%, Izt=75mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5353A	-	SMBJ5353A	Zener diode	16V±10%, Izt=75mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5353B	-	SMB5353B	Zener diode	16V±5%, 75mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1t	Exc
5353B	-	SMBG5353B	Zener diode	16V±5%, Izt=75mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5353B	-	SMBJ5353B	Zener diode	16V±5%, Izt=75mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc
5354A	-	SMBG5354A	Zener diode	17V±10%, Izt=70mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5354A	-	SMBJ5354A	Zener diode	17V±10%, Izt=70mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc
5354B	-	SMB5354B	Zener diode	17V±5%, 70mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1t	Exc
5354B	-	SMBG5354B	Zener diode	17V±5%, Izt=70mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5354B	-	SMBJ5354B	Zener diode	17V±5%, Izt=70mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc
5355A	-	SMBG5355A	Zener diode	18V±10%, Izt=65mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5355A	-	SMBJ5355A	Zener diode	18V±10%, Izt=65mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc
5355B	-	SMB5355B	Zener diode	18V±5%, 65mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1t	Exc
5355B	-	SMBG5355B	Zener diode	18V±5%, Izt=65mA, Zzt=2.5Ω, 5W	DO-215AA	5d	1a	Msc
5355B	-	SMBJ5355B	Zener diode	18V±5%, Izt=65mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Msc
5356A	-	SMBG5356A	Zener diode	19V±10%, Izt=65mA, Zzt=3Ω, 5W	DO-215AA	5d	1a	Msc
5356A	-	SMBJ5356A	Zener diode	19V±10%, Izt=65mA, Zzt=3Ω, 5W	DO-214AA	1d	1a	Msc
5356B	-	SMB5356B	Zener diode	19V±5%, 65mA, Zzt=3Ω, 5W	DO-214AA	1d	1t	Exc
5356B	-	SMBG5356B	Zener diode	19V±5%, Izt=65mA, Zzt=3Ω, 5W	DO-215AA	5d	1a	Msc
5356B	-	SMBJ5356B	Zener diode	19V±5%, Izt=65mA, Zzt=3Ω, 5W	DO-214AA	1d	1a	Msc
5357A	-	SMBG5357A	Zener diode	20V±10%, Izt=65mA, Zzt=3Ω, 5W	DO-215AA	5d	1a	Msc
5357A	-	SMBJ5357A	Zener diode	20V±10%, Izt=65mA, Zzt=3Ω, 5W	DO-214AA	1d	1a	Msc
5357B	-	SMB5357B	Zener diode	20V±5%, 65mA, Zzt=3Ω, 5W	DO-214AA	1d	1t	Exc
5357B	-	SMBG5357B	Zener diode	20V±5%, Izt=65mA, Zzt=3Ω, 5W	DO-215AA	5d	1a	Msc
5357B	-	SMBJ5357B	Zener diode	20V±5%, Izt=65mA, Zzt=3Ω, 5W	DO-214AA	1d	1a	Msc
5358A	-	SMBG5358A	Zener diode	22V±10%, Izt=50mA, Zzt=3.5Ω, 5W	DO-215AA	5d	1a	Msc
5358A	-	SMBJ5358A	Zener diode	22V±10%, Izt=50mA, Zzt=3.5Ω, 5W	DO-214AA	1d	1a	Msc
5358B	-	SMB5358B	Zener diode	22V±5%, 50mA, Zzt=3.5Ω, 5W	DO-214AA	1d	1t	Exc
5358B	-	SMBG5358B	Zener diode	22V±5%, Izt=50mA, Zzt=3.5Ω, 5W	DO-215AA	5d	1a	Msc
5358B	-	SMBJ5358B	Zener diode	22V±5%, Izt=50mA, Zzt=3.5Ω, 5W	DO-214AA	1d	1a	Msc
5359A	-	SMBG5359A	Zener diode	24V±10%, Izt=50mA, Zzt=3.5Ω, 5W	DO-215AA	5d	1a	Msc
5359A	-	SMBJ5359A	Zener diode	24V±10%, Izt=50mA, Zzt=3.5Ω, 5W	DO-214AA	1d	1a	Msc
5359B	-	SMB5359B	Zener diode	24V±5%, 50mA, Zzt=3.5Ω, 5W	DO-214AA	1d	1t	Exc
5359B	-	SMBG5359B	Zener diode	24V±5%, Izt=50mA, Zzt=3.5Ω, 5W	DO-215AA	5d	1a	Msc
5359B	-	SMBJ5359B	Zener diode	24V±5%, Izt=50mA, Zzt=3.5Ω, 5W	DO-214AA	1d	1a	Msc
5360A	-	SMBG5360A	Zener diode	25V±10%, Izt=50mA, Zzt=4Ω, 5W	DO-215AA	5d	1a	Msc
5360A	-	SMBJ5360A	Zener diode	25V±10%, Izt=50mA, Zzt=4Ω, 5W	DO-214AA	1d	1a	Msc
5360B	-	SMB5360B	Zener diode	25V±5%, 50mA, Zzt=4Ω, 5W	DO-214AA	1d	1t	Exc
5360B	-	SMBG5360B	Zener diode	25V±5%, Izt=50mA, Zzt=4Ω, 5W	DO-215AA	5d	1a	Msc
5360B	-	SMBJ5360B	Zener diode	25V±5%, Izt=50mA, Zzt=4Ω, 5W	DO-214AA	1d	1a	Msc
5361A	-	SMBG5361A	Zener diode	27V±10%, Izt=50mA, Zzt=5Ω, 5W	DO-215AA	5d	1a	Msc
5361A	-	SMBJ5361A	Zener diode	27V±10%, Izt=50mA, Zzt=5Ω, 5W	DO-214AA	1d	1a	Msc
5361B	-	SMB5361B	Zener diode	27V±5%, 50mA, Zzt=5Ω, 5W	DO-214AA	1d	1t	Exc
5361B	-	SMBG5361B	Zener diode	27V±5%, Izt=50mA, Zzt=5Ω, 5W	DO-215AA	5d	1a	Msc
5361B	-	SMBJ5361B	Zener diode	27V±5%, Izt=50mA, Zzt=5Ω, 5W	DO-214AA	1d	1a	Msc
5362A	-	SMBG5362A	Zener diode	28V±10%, Izt=50mA, Zzt=6Ω, 5W	DO-215AA	5d	1a	Msc
5362A	-	SMBJ5362A	Zener diode	28V±10%, Izt=50mA, Zzt=6Ω, 5W	DO-214AA	1d	1a	Msc
5362B	-	SMB5362B	Zener diode	28V±5%, 50mA, Zzt=6Ω, 5W	DO-214AA	1d	1t	Exc
5362B	-	SMBG5362B	Zener diode	28V±5%, Izt=50mA, Zzt=6Ω, 5W	DO-215AA	5d	1a	Msc
5362B	-	SMBJ5362B	Zener diode	28V±5%, Izt=50mA, Zzt=6Ω, 5W	DO-214AA	1d	1a	Msc
5363A	-	SMBG5363A	Zener diode	30V±10%, Izt=40mA, Zzt=8Ω, 5W	DO-215AA	5d	1a	Msc
5363A	-	SMBJ5363A	Zener diode	30V±10%, Izt=40mA, Zzt=8Ω, 5W	DO-214AA	1d	1a	Msc
5363B	-	SMB5363B	Zener diode	30V±5%, 40mA, Zzt=8Ω, 5W	DO-214AA	1d	1t	Exc
5363B	-	SMBG5363B	Zener diode	30V±5%, Izt=40mA, Zzt=8Ω, 5W	DO-215AA	5d	1a	Msc
5363B	-	SMBJ5363B	Zener diode	30V±5%, Izt=40mA, Zzt=8Ω, 5W	DO-214AA	1d	1a	Msc
5364A	-	SMBG5364A	Zener diode	33V±10%, Izt=40mA, Zzt=10Ω, 5W	DO-215AA	5d	1a	Msc
5364A	-	SMBJ5364A	Zener diode	33V±10%, Izt=40mA, Zzt=10Ω, 5W	DO-214AA	1d	1a	Msc
5364B	-	SMB5364B	Zener diode	33V±5%, 40mA, Zzt=10Ω, 5W	DO-214AA	1d	1t	Exc
5364B	-	SMBG5364B	Zener diode	33V±5%, Izt=40mA, Zzt=10Ω, 5W	DO-215AA	5d	1a	Msc
5364B	-	SMBJ5364B	Zener diode	33V±5%, Izt=40mA, Zzt=10Ω, 5W	DO-214AA	1d	1a	Msc
5365A	-	SMBG5365A	Zener diode	36V±10%, Izt=30mA, Zzt=11Ω, 5W	DO-215AA	5d	1a	Msc
5365A	-	SMBJ5365A	Zener diode	36V±10%, Izt=30mA, Zzt=11Ω, 5W	DO-214AA	1d	1a	Msc
5365B	-	SMB5365B	Zener diode	36V±5%, 30mA, Zzt=11Ω, 5W	DO-214AA	1d	1t	Exc
5365B	-	SMBG5365B	Zener diode	36V±5%, Izt=30mA, Zzt=11Ω, 5W	DO-215AA	5d	1a	Msc
5365B	-	SMBJ5365B	Zener diode	36V±5%, Izt=30mA, Zzt=11Ω, 5W	DO-214AA	1d	1a	Msc
5366A	-	SMBG5366A	Zener diode	39V±10%, Izt=30mA, Zzt=14Ω, 5W	DO-215AA	5d	1a	Msc
5366A	-	SMBJ5366A	Zener diode	39V±10%, Izt=30mA, Zzt=14Ω, 5W	DO-214AA	1d	1a	Msc
5366B	-	SMB5366B	Zener diode	39V±5%, 30mA, Zzt=14Ω, 5W	DO-214AA	1d	1t	Exc
5366B	-	SMBG5366B	Zener diode	39V±5%, Izt=30mA, Zzt=14Ω, 5W	DO-215AA	5d	1a	Msc
5366B	-	SMBJ5366B	Zener diode	39V±5%, Izt=30mA, Zzt=14Ω, 5W	DO-214AA	1d	1a	Msc
5367A	-	SMBG5367A	Zener diode	43V±10%, Izt=30mA, Zzt=20Ω, 5W	DO-215AA	5d	1a	Msc
5367A	-	SMBJ5367A	Zener diode	43V±10%, Izt=30mA, Zzt=20Ω, 5W	DO-214AA	1d	1a	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5367B	-	SMB5367B	Zener diode	43V±5%, 30mA, Zzt=20Ω, 5W	DO-214AA	1d	1t	Exc
5367B	-	SMBG5367B	Zener diode	43V±5%, Izt=30mA, Zzt=20Ω, 5W	DO-215AA	5d	1a	Msc
5367B	-	SMBJ5367B	Zener diode	43V±5%, Izt=30mA, Zzt=20Ω, 5W	DO-214AA	1d	1a	Msc
5368A	-	SMBG5368A	Zener diode	47V±10%, Izt=25mA, Zzt=25Ω, 5W	DO-215AA	5d	1a	Msc
5368A	-	SMBJ5368A	Zener diode	47V±10%, Izt=25mA, Zzt=25Ω, 5W	DO-214AA	1d	1a	Msc
5368B	-	SMB5368B	Zener diode	47V±5%, 25mA, Zzt=25Ω, 5W	DO-214AA	1d	1t	Exc
5368B	-	SMBG5368B	Zener diode	47V±5%, Izt=25mA, Zzt=25Ω, 5W	DO-215AA	5d	1a	Msc
5368B	-	SMBJ5368B	Zener diode	47V±5%, Izt=25mA, Zzt=25Ω, 5W	DO-214AA	1d	1a	Msc
5369A	-	SMBG5369A	Zener diode	51V±10%, Izt=25mA, Zzt=27Ω, 5W	DO-215AA	5d	1a	Msc
5369A	-	SMBJ5369A	Zener diode	51V±10%, Izt=25mA, Zzt=27Ω, 5W	DO-214AA	1d	1a	Msc
5369B	-	SMB5369B	Zener diode	51V±5%, 25mA, Zzt=27Ω, 5W	DO-214AA	1d	1t	Exc
5369B	-	SMBG5369B	Zener diode	51V±5%, Izt=25mA, Zzt=27Ω, 5W	DO-215AA	5d	1a	Msc
5369B	-	SMBJ5369B	Zener diode	51V±5%, Izt=25mA, Zzt=27Ω, 5W	DO-214AA	1d	1a	Msc
5370A	-	SMBG5370A	Zener diode	56V±10%, Izt=20mA, Zzt=35Ω, 5W	DO-215AA	5d	1a	Msc
5370A	-	SMBJ5370A	Zener diode	56V±10%, Izt=20mA, Zzt=35Ω, 5W	DO-214AA	1d	1a	Msc
5370B	-	SMBG5370B	Zener diode	56V±5%, Izt=20mA, Zzt=35Ω, 5W	DO-215AA	5d	1a	Msc
5370B	-	SMBJ5370B	Zener diode	56V±5%, Izt=20mA, Zzt=35Ω, 5W	DO-214AA	1d	1a	Msc
5371A	-	SMBG5371A	Zener diode	60V±10%, Izt=20mA, Zzt=40Ω, 5W	DO-215AA	5d	1a	Msc
5371A	-	SMBJ5371A	Zener diode	60V±10%, Izt=20mA, Zzt=40Ω, 5W	DO-214AA	1d	1a	Msc
5371B	-	SMBG5371B	Zener diode	60V±5%, Izt=20mA, Zzt=40Ω, 5W	DO-215AA	5d	1a	Msc
5371B	-	SMBJ5371B	Zener diode	60V±5%, Izt=20mA, Zzt=40Ω, 5W	DO-214AA	1d	1a	Msc
5372A	-	SMBG5372A	Zener diode	62V±10%, Izt=20mA, Zzt=42Ω, 5W	DO-215AA	5d	1a	Msc
5372A	-	SMBJ5372A	Zener diode	62V±10%, Izt=20mA, Zzt=42Ω, 5W	DO-214AA	1d	1a	Msc
5372B	-	SMBG5372B	Zener diode	62V±5%, Izt=20mA, Zzt=42Ω, 5W	DO-215AA	5d	1a	Msc
5372B	-	SMBJ5372B	Zener diode	62V±5%, Izt=20mA, Zzt=42Ω, 5W	DO-214AA	1d	1a	Msc
5373A	-	SMBG5373A	Zener diode	68V±10%, Izt=20mA, Zzt=44Ω, 5W	DO-215AA	5d	1a	Msc
5373A	-	SMBJ5373A	Zener diode	68V±10%, Izt=20mA, Zzt=44Ω, 5W	DO-214AA	1d	1a	Msc
5373B	-	SMBG5373B	Zener diode	68V±5%, Izt=20mA, Zzt=44Ω, 5W	DO-215AA	5d	1a	Msc
5373B	-	SMBJ5373B	Zener diode	68V±5%, Izt=20mA, Zzt=44Ω, 5W	DO-214AA	1d	1a	Msc
5374A	-	SMBG5374A	Zener diode	75V±10%, Izt=20mA, Zzt=45Ω, 5W	DO-215AA	5d	1a	Msc
5374A	-	SMBJ5374A	Zener diode	75V±10%, Izt=20mA, Zzt=45Ω, 5W	DO-214AA	1d	1a	Msc
5374B	-	SMBG5374B	Zener diode	75V±5%, Izt=20mA, Zzt=45Ω, 5W	DO-215AA	5d	1a	Msc
5374B	-	SMBJ5374B	Zener diode	75V±5%, Izt=20mA, Zzt=45Ω, 5W	DO-214AA	1d	1a	Msc
5375A	-	SMBG5375A	Zener diode	82V±10%, Izt=15mA, Zzt=65Ω, 5W	DO-215AA	5d	1a	Msc
5375A	-	SMBJ5375A	Zener diode	82V±10%, Izt=15mA, Zzt=65Ω, 5W	DO-214AA	1d	1a	Msc
5375B	-	SMBG5375B	Zener diode	82V±5%, Izt=15mA, Zzt=65Ω, 5W	DO-215AA	5d	1a	Msc
5375B	-	SMBJ5375B	Zener diode	82V±5%, Izt=15mA, Zzt=65Ω, 5W	DO-214AA	1d	1a	Msc
5376A	-	SMBG5376A	Zener diode	87V±10%, Izt=15mA, Zzt=75Ω, 5W	DO-215AA	5d	1a	Msc
5376A	-	SMBJ5376A	Zener diode	87V±10%, Izt=15mA, Zzt=75Ω, 5W	DO-214AA	1d	1a	Msc
5376B	-	SMBG5376B	Zener diode	87V±5%, Izt=15mA, Zzt=75Ω, 5W	DO-215AA	5d	1a	Msc
5376B	-	SMBJ5376B	Zener diode	87V±5%, Izt=15mA, Zzt=75Ω, 5W	DO-214AA	1d	1a	Msc
5377A	-	SMBG5377A	Zener diode	91V±10%, Izt=15mA, Zzt=75Ω, 5W	DO-215AA	5d	1a	Msc
5377A	-	SMBJ5377A	Zener diode	91V±10%, Izt=15mA, Zzt=75Ω, 5W	DO-214AA	1d	1a	Msc
5377B	-	SMBG5377B	Zener diode	91V±5%, Izt=15mA, Zzt=75Ω, 5W	DO-215AA	5d	1a	Msc
5377B	-	SMBJ5377B	Zener diode	91V±5%, Izt=15mA, Zzt=75Ω, 5W	DO-214AA	1d	1a	Msc
5378A	-	SMBG5378A	Zener diode	100V±10%, Izt=12mA, Zzt=90Ω, 5W	DO-215AA	5d	1a	Msc
5378A	-	SMBJ5378A	Zener diode	100V±10%, Izt=12mA, Zzt=90Ω, 5W	DO-214AA	1d	1a	Msc
5378B	-	SMBG5378B	Zener diode	100V±5%, Izt=12mA, Zzt=90Ω, 5W	DO-215AA	5d	1a	Msc
5378B	-	SMBJ5378B	Zener diode	100V±5%, Izt=12mA, Zzt=90Ω, 5W	DO-214AA	1d	1a	Msc
5379A	-	SMBG5379A	Zener diode	110V±10%, Izt=12mA, Zzt=125Ω, 5W	DO-215AA	5d	1a	Msc
5379A	-	SMBJ5379A	Zener diode	110V±10%, Izt=12mA, Zzt=125Ω, 5W	DO-214AA	1d	1a	Msc
5379B	-	SMBG5379B	Zener diode	110V±5%, Izt=12mA, Zzt=125Ω, 5W	DO-215AA	5d	1a	Msc
5379B	-	SMBJ5379B	Zener diode	110V±5%, Izt=12mA, Zzt=125Ω, 5W	DO-214AA	1d	1a	Msc
5380A	-	SMBG5380A	Zener diode	120V±10%, Izt=10mA, Zzt=170Ω, 5W	DO-215AA	5d	1a	Msc
5380A	-	SMBJ5380A	Zener diode	120V±10%, Izt=10mA, Zzt=170Ω, 5W	DO-214AA	1d	1a	Msc
5380B	-	SMBG5380B	Zener diode	120V±5%, Izt=10mA, Zzt=170Ω, 5W	DO-215AA	5d	1a	Msc
5380B	-	SMBJ5380B	Zener diode	120V±5%, Izt=10mA, Zzt=170Ω, 5W	DO-214AA	1d	1a	Msc
5381A	-	SMBG5381A	Zener diode	130V±10%, Izt=10mA, Zzt=190Ω, 5W	DO-215AA	5d	1a	Msc
5381A	-	SMBJ5381A	Zener diode	130V±10%, Izt=10mA, Zzt=190Ω, 5W	DO-214AA	1d	1a	Msc
5381B	-	SMBG5381B	Zener diode	130V±5%, Izt=10mA, Zzt=190Ω, 5W	DO-215AA	5d	1a	Msc
5381B	-	SMBJ5381B	Zener diode	130V±5%, Izt=10mA, Zzt=190Ω, 5W	DO-214AA	1d	1a	Msc
5382A	-	SMBG5382A	Zener diode	140V±10%, Izt=8mA, Zzt=230Ω, 5W	DO-215AA	5d	1a	Msc
5382A	-	SMBJ5382A	Zener diode	140V±10%, Izt=8mA, Zzt=230Ω, 5W	DO-214AA	1d	1a	Msc
5382B	-	SMBG5382B	Zener diode	140V±5%, Izt=8mA, Zzt=230Ω, 5W	DO-215AA	5d	1a	Msc
5382B	-	SMBJ5382B	Zener diode	140V±5%, Izt=8mA, Zzt=230Ω, 5W	DO-214AA	1d	1a	Msc
5383A	-	SMBG5383A	Zener diode	150V±10%, Izt=8mA, Zzt=330Ω, 5W	DO-215AA	5d	1a	Msc
5383A	-	SMBJ5383A	Zener diode	150V±10%, Izt=8mA, Zzt=330Ω, 5W	DO-214AA	1d	1a	Msc
5383B	-	SMBG5383B	Zener diode	150V±5%, Izt=8mA, Zzt=330Ω, 5W	DO-215AA	5d	1a	Msc
5383B	-	SMBJ5383B	Zener diode	150V±5%, Izt=8mA, Zzt=330Ω, 5W	DO-214AA	1d	1a	Msc
5384A	-	SMBG5384A	Zener diode	160V±10%, Izt=8mA, Zzt=350Ω, 5W	DO-215AA	5d	1a	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5384A	-	SMBJ5384A	Zener diode	160V±10%, Izt=8mA, Zzt=350Ω, 5W	DO-214AA	1d	1a	Msc
5384B	-	SMBG5384B	Zener diode	160V±5%, Izt=8mA, Zzt=350Ω, 5W	DO-215AA	5d	1a	Msc
5384B	-	SMBJ5384B	Zener diode	160V±5%, Izt=8mA, Zzt=350Ω, 5W	DO-214AA	1d	1a	Msc
5385A	-	SMBG5385A	Zener diode	170V±10%, Izt=8mA, Zzt=380Ω, 5W	DO-215AA	5d	1a	Msc
5385A	-	SMBJ5385A	Zener diode	170V±10%, Izt=8mA, Zzt=380Ω, 5W	DO-214AA	1d	1a	Msc
5385B	-	SMBG5385B	Zener diode	170V±5%, Izt=8mA, Zzt=380Ω, 5W	DO-215AA	5d	1a	Msc
5385B	-	SMBJ5385B	Zener diode	170V±5%, Izt=8mA, Zzt=380Ω, 5W	DO-214AA	1d	1a	Msc
5386A	-	SMBG5386A	Zener diode	180V±10%, Izt=5mA, Zzt=430Ω, 5W	DO-215AA	5d	1a	Msc
5386A	-	SMBJ5386A	Zener diode	180V±10%, Izt=5mA, Zzt=430Ω, 5W	DO-214AA	1d	1a	Msc
5386B	-	SMBG5386B	Zener diode	180V±5%, Izt=5mA, Zzt=430Ω, 5W	DO-215AA	5d	1a	Msc
5386B	-	SMBJ5386B	Zener diode	180V±5%, Izt=5mA, Zzt=430Ω, 5W	DO-214AA	1d	1a	Msc
5387A	-	SMBG5387A	Zener diode	190V±10%, Izt=5mA, Zzt=450Ω, 5W	DO-215AA	5d	1a	Msc
5387A	-	SMBJ5387A	Zener diode	190V±10%, Izt=5mA, Zzt=450Ω, 5W	DO-214AA	1d	1a	Msc
5387B	-	SMBG5387B	Zener diode	190V±5%, Izt=5mA, Zzt=450Ω, 5W	DO-215AA	5d	1a	Msc
5387B	-	SMBJ5387B	Zener diode	190V±5%, Izt=5mA, Zzt=450Ω, 5W	DO-214AA	1d	1a	Msc
5388A	-	SMBG5388A	Zener diode	200V±10%, Izt=5mA, Zzt=480Ω, 5W	DO-215AA	5d	1a	Msc
5388A	-	SMBJ5388A	Zener diode	200V±10%, Izt=5mA, Zzt=480Ω, 5W	DO-214AA	1d	1a	Msc
5388B	-	SMBG5388B	Zener diode	200V±5%, Izt=5mA, Zzt=480Ω, 5W	DO-215AA	5d	1a	Msc
5388B	-	SMBJ5388B	Zener diode	200V±5%, Izt=5mA, Zzt=480Ω, 5W	DO-214AA	1d	1a	Msc
53B	-	MMHZ5253BPT	Zener diode	23.75..26.25V, Izt=5mA, Zzt=62Ω, 225mW	SOD-123	5d	1a	Chm
53B	-	SMC5353B	Zener diode	16.0V±5%, Zzt=3.0(75.0mA), Izm=295.0mA, 5W	DO-214AB	1d	1a	Ers
53L	-	SSC53L	Si-diode	SBR, 30V, 5A, Vf<0.49V(5A)	DO-214AB	1d	1k	Vs
53S	-	MMHZ5253SPT	Zener diode	24.50..25.50V, Izt=5mA, Zzt=62Ω, 225mW	SOD-123	5d	1a	Chm
54	-	HMSZ5254B	Zener diode	27V±5%, Izt=4.6mA, Zzt=41Ω, 225mW	SOD-323	5d	1d	Hsn
54	-	MM5Z3V6	Zener diode	3.4..3.8V, Zzt=90Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
54	-	SMBG54	TVS	Vrwm=54V, Vbr=60.0..76.0V, 6.2A, 600W(1ms)	DO-215AA	5d	1a	Msc
54	-	TCBZX584C3V6	Zener diode	3.4..3.8V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523FL	7d	1a	Tac
54	-	TCMM5Z3V6	Zener diode	3.4..3.8V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523FL	7d	1a	Tac
54	-	ZD5254BS2	Zener diode	27V±5%, 4.6mA, Zzt=41Ω, 500mW	SOD-323	5d	1a	Cys
540	-	F1C540	TVS	Vrwm=32V, 9A, 500W(1ms)	DO-214AC	1d	1i	Org
540A	-	1.5SMC540A	TVS	Vrwm=459.0V, Vbr=459..513V, Ipp=2.0A, 1500W(1ms)	DO-214AB	1d	1k	Vs
540A	-	1.5SMC540A	TVS	Vrwm=459.0V, Vbr=459..513V, Ipp=2.0A, 1500W(1ms)	DO-214AB	1d	2s	Lif
540A	-	1.5SMC540A	TVS	Vrwm=459.0V, Vbr=459..513V, Ipp=2.0A, 1500W(1ms)	DO-214AB	1d	1b	Mde
540A	-	P4SMA540A	TVS	Vbr=513..567V, Vrwm=420V, 0.41A, 400W (1ms)	DO-214AC	1d	1k	Vs
540A	-	P6SMA540A	TVS	Vbr=513..567V, Vrwm=459V, 0.81A, 600W(1ms)	DO-214AC	1d	1a	Eic
540A	-	P6SMB540A	TVS	Vrwm=540V, Vbr=513..567, 0.81A, 600W(1ms)	DO-214AA	1d	1k	Vs
540A	-	SMAJP4KE540A	TVS	Vrwm=459.0V, Vbr=513.0..567.0V, Ipp=0.5A, 400W(1ms)	DO-214AC	1d	1a	Mco
540A	-	SMBJP6KE540A	TVS	Vrwm=459.0V, Vbr=513.0..567.0V, Ipp=0.8A, 600W(1ms)	DO-214AA	1d	1a	Mco
540A	-	SMCJ1.5KE540A	TVS	Vrwm=459.0V, Vbr=513.0..567.0V, Ipp=2.0A, 1500W(1ms)	DO-214AB	1d	1a	Mco
540C	-	1.5SMC540CA	TVS	Vrwm=459.0V, Vbr=459..513V, Ipp=2.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
540C	-	1.5SMC540CA	TVS	Vrwm=459.0V, Vbr=459..513V, Ipp=2.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
540C	-	1.5SMC540CA	TVS	Vrwm=459.0V, Vbr=459..513V, Ipp=2.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Fee
540C	-	SMAJP4KE540CA	TVS	Vrwm=459.0V, Vbr=513.0..567.0V, Ipp=0.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
540C	-	SMBJP6KE540CA	TVS	Vrwm=459.0V, Vbr=513.0..567.0V, Ipp=0.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
540C	-	SMCJ1.5KE540CA	TVS	Vrwm=459.0V, Vbr=513.0..567.0V, Ipp=2.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
540CA	-	P6SMA540CA	TVS	Vbr=513..567V, Vrwm=459V, 0.81A, 600W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
54A	-	1SMC54A	TVS	Vbr=60.0..66.3V, Vrwm=54V, 17.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
54A	-	MMF54A	TVS	Vrwm=54V, Vbr=60.0..69.0V, Ipp=2.3A, 200W(1ms)	SOD-123FL	7d	2m	Sst
54A	-	SMAJ54A	TVS	Vrwm=54V, Vbr=60.0..66.3V, 4.6A, 400W(1ms)	DO-214AC	1d	1a	Sus
54A	-	SMBG54A	TVS	Vrwm=54V, Vbr=60.0..69.0V, 6.9A, 600W(1ms)	DO-215AA	5d	1a	Msc
54A	-	SMBJ54A	TVS	Vrwm=54V, Vbr=60.0..69.0V, 6.9A, 600W(1ms)	DO-214AA	1d	1a	Sus
54A	-	SMCJ54A	TVS	Vrwm=54V, Vbr=60..69V, 15.6A, 1500W(1ms)	DO-214AB	1d	1k	Sus
54A	-	SMF54A	TVS	Vbr=60..66.3V, Vrwm=54V, Ipp=2.3A, 200W(1ms)	SOD-123FL	7d	1a	Mco
54A	-	UMA54A	TVS	Vrwm=54V, Vbr=60.0..87.1V, 5.7A, 500W(1ms)	UltraMite	14d	1v	Msc
54B	-	MMHZ5254BPT	Zener diode	25.65..28.35V, Izt=5mA, Zzt=70Ω, 225mW	SOD-123	5d	1a	Chm
54B	-	SMC5354B	Zener diode	17.0V±5%, Zzt=3.0(70.0mA), Izm=280.0mA, 5W	DO-214AB	1d	1a	Ers
54C	-	SMBG54C	TVS	Vrwm=54V, Vbr=60.0..76.0V, 6.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
54CA	-	1SMC54CA	TVS	Vbr=60.0..66.3V, Vrwm=54V, 17.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
54CA	-	MMF54CA	TVS	Vrwm=54V, Vbr=60.0..69.0V, Ipp=2.3A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
54CA	-	SMAJ54CA	TVS	Vrwm=54V, Vbr=60.0..66.3V, 4.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
54CA	-	SMBG54CA	TVS	Vrwm=54V, Vbr=60.0..69.0V, 6.9A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
54CA	-	SMBJ54CA	TVS	Vrwm=54V, Vbr=60.0..69.0V, 6.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
54CA	-	SMCJ54CA	TVS	Vrwm=54V, Vbr=60..69V, 15.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
54CA	-	SMF54CA	TVS	Vbr=60..66.3V, Vrwm=54V, Ipp=2.3A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
54CA	-	UMA54CA	TVS	Vrwm=54V, Vbr=60.0..87.1V, 5.7A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
54S	-	MMHZ5254SPT	Zener diode	26.46..27.54V, Izt=5mA, Zzt=70Ω, 225mW	SOD-123	5d	1a	Chm
54V	-	SMA54	TVS	Vbr=60..73.3V, Vrwm=54.0V, 3.1A, 300W(1ms)	DO-214AC	1d	1a	Mic
54V	-	SMB54	TVS	Vbr=60..73.3V, Vrwm=54V, 6.2A, 600W(1ms	DO-214AA	1d	1a	Mic
54V	-	SMC54	TVS	Vbr=60..73.3V, Vrwm=54V, 15.6A, 1500W(1ms),	DO-214AB	1d	1a	Mic
54VA	-	SMA54A	TVS	Vbr=60..66.3V, Vrwm=54.0V, 3.4A, 300W(1ms)	DO-214AC	1d	1a	Mic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
54VA	-	SMB54A	TVS	Vbr=60..66.3V, Vrwm=54V, 6.9A, 600W(1ms)	DO-214AA	1d	1a	Mic
54VA	-	SMC54A	TVS	Vbr=60..66.3V, Vrwm=54V, 17.2A, 1500W(1ms),	DO-214AB	1d	1a	Mic
54VC	-	SMA54C	TVS	Vbr=60..73.3V, Vrwm=54.0V, 3.1A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
54VC	-	SMB54C	TVS	Vbr=60..73.3V, Vrwm=54V, 6.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
54VC	-	SMC54C	TVS	Vbr=60..73.3V, Vrwm=54V, 15.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
54VCA	-	SMA54CA	TVS	Vbr=60..66.3V, Vrwm=54.0V, 3.4A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
54VCA	-	SMB54CA	TVS	Vbr=60..66.3V, Vrwm=54V, 6.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
54VCA	-	SMC54CA	TVS	Vbr=60..66.3V, Vrwm=54V, 17.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
55	-	BBY57-02W	C-diode	VCO-tuning, 10V, 20mA, 16.5..18.6pF(4..1V)	SCD-80	6d	1u	Inf
55	-	EDZ16B	Zener diode	15.85..16.51V, Izt=5mA, Zzt=50Ω, 150mW	SOD-523	6d	1a	Rhm
55	-	EDZV16B	Zener diode	15.85..16.51V, Izt=5.0mA, Zzt=50Ω, 150mW	SOD-523	6d	2v	Rhm
55	-	FDZ16EV	Zener diode	15.850..16.510V, Izt=5mA, Zzt=50Ω, 150mW	SOD-523	6d	1a	Fis
55	-	FDZ16VT	Zener diode	15.850..16.510V, Izt=5mA, Zzt=50Ω, 200mW	SOD-323	5d	1a	Fis
55	-	GDZ3V3B-V-G	Zener diode	3.32..3.53V, Izt=5mA, Zzt=120Ω, 200mW	SOD-323	5d	2m	Vs
55	-	HMSZ5255B	Zener diode	28V±5%, Izt=4.5mA, Zzt=44Ω, 225mW	SOD-323	5d	1d	Hsn
55	-	LBZT52B16T1G	Zener diode	15.85..16.51V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
55	-	LEDZ16BT1G	Zener diode	15.85..16.51V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
55	-	LUDZS16BT1G	Zener diode	15.85..16.51V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
55	-	MM5Z3V9	Zener diode	3.7..4.1V, Zzt=90Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
55	-	TCBZX584C3V9	Zener diode	3.7..4.1V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523FL	7d	1a	Tac
55	-	TCMM5Z3V9	Zener diode	3.7..4.1V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523FL	7d	1a	Tac
55	-	TDZ16B	Zener diode	16V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
55	-	UDZS16B	Zener diode	15.85..16.51V, Izt=5mA, Zzt=50Ω, 200mW	SOD-323	5d	1a	Wtr
55	-	UDZS16B	Zener diode	16V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
55	-	UDZV16B	Zener diode	15.85..16.51V, Izt=5.0mA, Zzt=50Ω, 200mW	SOD-323	5d	2v	Rhm
55	-	VDZS16B	Zener diode	16V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
55	-	ZD5255BS2	Zener diode	28V±5%, 4.5mA, Zzt=44Ω, 500mW	SOD-323	5d	1a	Cys
550	-	F1C550	TVS	Vrwm=40V, 7A, 500W(1ms)	DO-214AC	1d	1i	Org
550A	-	1.5SMC550A	TVS	Vrwm=467.0V, Vbr=467..522V, Ipp=2.0A, 1500W(1ms)	DO-214AB	1d	2s	Lif
550A	-	1.5SMC550A	TVS	Vrwm=467.0V, Vbr=467..522V, Ipp=2.0A, 1500W(1ms)	DO-214AB	1d	1a	Fee
550A	-	1.5SMC550A	TVS	Vrwm=467.0V, Vbr=467..522V, Ipp=2.0A, 1500W(1ms)	DO-214AB	1d	1b	Mde
550A	-	SMAJP4KE550A	TVS	Vrwm=495.0V, Vbr=522.50..577.50V, Ipp=0.5A, 400W(1ms)	DO-214AC	1d	1a	Mco
550A	-	SMBJP6KE550A	TVS	Vrwm=495.0V, Vbr=522.50..577.50 V, Ipp=0.8A, 600W(1ms)	DO-214AA	1d	1a	Mco
550A	-	SMCJ1.5KE550A	TVS	Vrwm=495.0V, Vbr=522.50..577.50V, Ipp=2.0A, 1500W(1ms)	DO-214AB	1d	1a	Mco
550A	-	TVP04A551A-G	TVS	Vbr=522.50..577.50V, Vrwm=470.3V, Ipp=0.53A, 400W(1ms)	DO-214AC	1d	2o	Cmc
550A	-	TVP06B551A-G	TVS	Vrwm=470.3V, Vbr=522.50..577.50V, Ipp=0.79A, 600W(1ms)	DO-214AA	1d	2o	Cmc
550C	-	1.5SMC550CA	TVS	Vrwm=467.0V, Vbr=467..522V, Ipp=2.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Fee
550C	-	1.5SMC550CA	TVS	Vrwm=467.0V, Vbr=467..522V, Ipp=2.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
550C	-	1.5SMC550CA	TVS	Vrwm=467.0V, Vbr=467..522V, Ipp=2.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
550C	-	SMAJP4KE550CA	TVS	Vrwm=495.0V, Vbr=522.50..577.50V, Ipp=0.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
550C	-	SMBJP6KE550CA	TVS	Vrwm=495.0V, Vbr=522.50..577.50V, Ipp=0.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
550C	-	SMCJ1.5KE550CA	TVS	Vrwm=495.0V, Vbr=522.50..577.50V, Ipp=2.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
550C	-	TVP04A551CA-G	TVS	Vbr=522.50..577.50V, Vrwm=470.3V, Ipp=0.53A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
550C	-	TVP06B551ACA-G	TVS	Vrwm=470.3V, Vbr=522.50..577.50V, Ipp=0.79A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
5510	-	SZ5510	Zener diode	10V±5%, Izt=75, Zzt=3.5Ω, 3W	DO-214AC	1d	1a	Eic
5511	-	SZ5511	Zener diode	11V±5%, Izt=68mA, Zzt=4Ω, 3W	DO-214AC	1d	1a	Eic
5512	-	SZ5512	Zener diode	12V±5%, Izt=63mA, Zzt=4.5Ω, 3W	DO-214AC	1d	1a	Eic
5513	-	SZ5513	Zener diode	13V±5%, Izt=58mA, Zzt=4.5Ω, 3W	DO-214AC	1d	1a	Eic
5514	-	SZ5514	Zener diode	14V±5%, Izt=53mA, Zzt=5Ω, 3W	DO-214AC	1d	1a	Eic
5515	-	SZ5515	Zener diode	15V±5%, Izt=50mA, Zzt=5.5Ω, 3W	DO-214AC	1d	1a	Eic
5516	-	SZ5516	Zener diode	16V±5%, Izt=47mA, Zzt=5.5Ω, 3W	DO-214AC	1d	1a	Eic
5517	-	SZ5517	Zener diode	17V±5%, Izt=44mA, Zzt=6Ω, 3W	DO-214AC	1d	1a	Eic
5518	-	SZ5518	Zener diode	18V±5%, Izt=42mA, Zzt=6Ω, 3W	DO-214AC	1d	1a	Eic
5519	-	SZ5519	Zener diode	19V±5%, Izt=40mA, Zzt=7Ω, 3W	DO-214AC	1d	1a	Eic
5520	-	SZ5520	Zener diode	20V±5%, Izt=37mA, Zzt=7Ω, 3W	DO-214AC	1d	1a	Eic
5522	-	SZ5522	Zener diode	22V±5%, Izt=34mA, Zzt=8Ω, 3W	DO-214AC	1d	1a	Eic
5524	-	SZ5524	Zener diode	24V±5%, Izt=31mA, Zzt=9Ω, 3W	DO-214AC	1d	1a	Eic
5527	-	SZ5527	Zener diode	27V±5%, Izt=28mA, Zzt=10Ω, 3W	DO-214AC	1d	1a	Eic
5528	-	SZ5528	Zener diode	28V±5%, Izt=27mA, Zzt=12Ω, 3W	DO-214AC	1d	1a	Eic
5530	-	SZ5530	Zener diode	30V±5%, Izt=25mA, Zzt=16Ω, 3W	DO-214AC	1d	1a	Eic
5533	-	SZ5533	Zener diode	33V±5%, Izt=23mA, Zzt=20Ω, 3W	DO-214AC	1d	1a	Eic
5536	-	SZ5536	Zener diode	36V±5%, Izt=21mA, Zzt=22Ω, 3W	DO-214AC	1d	1a	Eic
5539	-	SZ5539	Zener diode	39V±5%, Izt=19mA, Zzt=28Ω, 3W	DO-214AC	1d	1a	Eic
553J	-	SZ553J	Zener diode	3.9V±5%, Izt=192mA, Zzt=4.5Ω, 3W	DO-214AC	1d	1a	Eic
5543	-	SZ5543	Zener diode	43V±5%, Izt=17mA, Zzt=33Ω, 3W	DO-214AC	1d	1a	Eic
5547	-	SZ5547	Zener diode	47V±5%, Izt=16mA, Zzt=38Ω, 3W	DO-214AC	1d	1a	Eic
554D	-	SZ554D	Zener diode	4.3V±5%, Izt=174mA, Zzt=4.5Ω, 3W	DO-214AC	1d	1a	Eic
554H	-	SZ554H	Zener diode	4.7V±5%, Izt=160mA, Zzt=4Ω, 3W	DO-214AC	1d	1a	Eic
5551	-	SZ5551	Zener diode	51V±5%, Izt=15mA, Zzt=45Ω, 3W	DO-214AC	1d	1a	Eic
5556	-	SZ5556	Zener diode	56V±5%, Izt=13mA, Zzt=50Ω, 3W	DO-214AC	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
555B	-	SZ555B	Zener diode	5.1V±5%, Izt=147mA, Zzt=3.5Ω, 3W	DO-214AC	1d	1a	Eic
555G	-	SZ555G	Zener diode	5.6V±5%, Izt=134mA, Zzt=2.5Ω, 3W	DO-214AC	1d	1a	Eic
5562	-	SZ5562	Zener diode	62V±5%, Izt=12mA, Zzt=55Ω, 3W	DO-214AC	1d	1a	Eic
5568	-	SZ5568	Zener diode	68V±5%, Izt=11mA, Zzt=70Ω, 3W	DO-214AC	1d	1a	Eic
556C	-	SZ556C	Zener diode	6.2V±5%, Izt=121mA, Zzt=1.5Ω, 3W	DO-214AC	1d	1a	Eic
556I	-	SZ556I	Zener diode	6.8V±5%, Izt=110mA, Zzt=2Ω, 3W	DO-214AC	1d	1a	Eic
5575	-	SZ5575	Zener diode	75V±5%, Izt=10mA, Zzt=85Ω, 3W	DO-214AC	1d	1a	Eic
557F	-	SZ557F	Zener diode	7.5V±5%, Izt=100mA, Zzt=2Ω, 3W	DO-214AC	1d	1a	Eic
5582	-	SZ5582	Zener diode	82V±5%, Izt=9.1mA, Zzt=95Ω, 3W	DO-214AC	1d	1a	Eic
558C	-	SZ558C	Zener diode	8.2V±5%, Izt=91mA, Zzt=2.3Ω, 3W	DO-214AC	1d	1a	Eic
5591	-	SZ5591	Zener diode	91V±5%, Izt=8.2mA, Zzt=115Ω, 3W	DO-214AC	1d	1a	Eic
559B	-	SZ559B	Zener diode	9.1V±5%, Izt=82mA, Zzt=2.5Ω, 3W	DO-214AC	1d	1a	Eic
55B	-	MMHZ5255BPT	Zener diode	26.60..29.40V, Izt=5mA, Zzt=44Ω, 225mW	SOD-123	5d	1a	Chm
55B	-	SMC5355B	Zener diode	18.0V±5%, Zzt=3.0(65.0mA), Izm=265.0mA, 5W	DO-214AB	1d	1a	Ers
55B0	-	SZ55B0	Zener diode	100V±5%, Izt=7.5mA, Zzt=160Ω, 3W	DO-214AC	1d	1a	Eic
55B1	-	SZ55B1	Zener diode	110V±5%, Izt=6.8mA, Zzt=225Ω, 3W	DO-214AC	1d	1a	Eic
55B2	-	SZ55B2	Zener diode	120V±5%, Izt=6.3mA, Zzt=300Ω, 3W	DO-214AC	1d	1a	Eic
55B3	-	SZ55B3	Zener diode	130V±5%, Izt=5.8mA, Zzt=375Ω, 3W	DO-214AC	1d	1a	Eic
55B4	-	SZ55B4	Zener diode	140V±5%, Izt=5.3mA, Zzt=475Ω, 3W	DO-214AC	1d	1a	Eic
55B5	-	SZ55B5	Zener diode	150V±5%, Izt=5mA, Zzt=550Ω, 3W	DO-214AC	1d	1a	Eic
55B6	-	SZ55B6	Zener diode	160V±5%, Izt=4.7mA, Zzt=625Ω, 3W	DO-214AC	1d	1a	Eic
55B7	-	SZ55B7	Zener diode	170V±5%, Izt=4.4mA, Zzt=650Ω, 3W	DO-214AC	1d	1a	Eic
55B8	-	SZ55B8	Zener diode	180V±5%, Izt=4.2mA, Zzt=700Ω, 3W	DO-214AC	1d	1a	Eic
55B9	-	SZ55B9	Zener diode	190V±5%, Izt=4mA, Zzt=800Ω, 3W	DO-214AC	1d	1a	Eic
55D0	-	SZ55D0	Zener diode	200V±5%, Izt=3.7mA, Zzt=875Ω, 3W	DO-214AC	1d	1a	Eic
55S	-	MMHZ5255SPT	Zener diode	27.44..28.56V, Izt=5mA, Zzt=44Ω, 225mW	SOD-123	5d	1a	Chm
56	-	CDZ55C56	Zener diode	53.20..58.80V, Zzt=135Ω, Izt=2.25mA, 500mW	1206	70d	2d	Crp
56	-	CDZ55C56S	Zener diode	53.20..58.80V, Zzt=135Ω, Izt=2.25mA, 500mW	0805	70d	2d	Crp
56	-	CDZ55C56T	Zener diode	53.20..58.80V, Zzt=135Ω, Izt=2.25mA, 200mW	0603	70d	2d	Crp
56	-	CZRNC55C56-G	Zener diode	53.20..58.80V, Zt=135Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
56	-	HMSZ5256B	Zener diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 225mW	SOD-323	5d	1d	Hsn
56	-	HZC5.6	Zener diode	5.6V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
56	-	HZU5.6G	Zener diode	5.31..5.92V, Izt=5mA, 200mW	SOD-323	5d	1a	Ren
56	-	KDZ5.6EV	Zener diode	5.3..6V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
56	-	KDZ5.6V	Zener diode	5.3..6V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
56	-	MM5Z4V3	Zener diode	4.0..4.6V, Zzt=90Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
56	-	MMPZ5263SPT	Zener diode	54.88..57.12V, Izt=2.2mA, Zzt=150Ω, 225mW	SOD-323	5d	1a	Chm
56	-	P4SMA56	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 5.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
56	-	P6SMBJ56	TVS	Vrwm=56V, Vbr=50.4..61.6V, 7.4A, 600W(1ms)	DO-214AA	1d	1n	Lif
56	-	SML4758	Zener diode	56V±5%, Izt=4.5mA, Zzt=110Ω, 1W	DO-214AC	1d	1k	Vs
56	-	TCBZX584C4V3	Zener diode	4.0..4.6V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523FL	7d	1a	Tac
56	-	TCMM5Z4V3	Zener diode	4.0..4.6V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523FL	7d	1a	Tac
56	-	TZD5.6WS	Zener diode	5.30..6.0V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Ttr
56	-	TZD5.6WT	Zener diode	5.30..6.0V, Izt=5mA, Zzt=40Ω, 150mW	SOD-523	6d	1a	Ttr
56	-	USFZ5.6V	Zener diode	5.6V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
56	-	ZD5256BS2	Zener diode	30V±5%, 4.2mA, Zzt=49Ω, 500mW	SOD-323	5d	1a	Cys
5-6	-	MAZ80560M	Zener diode	5.48..5.76V, Zzt=40Ω(5mA), 150mW	SC-76	6d	1a	Pan
5-6	-	MAZ8056GML	Zener diode	5.48..5.76V, Zzt=40Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
56•	-	TZD5.6YWS	Zener diode	5.49..5.73V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Ttr
56•	-	TZD5.6YWT	Zener diode	5.49..5.73V, Izt=5mA, Zzt=40Ω, 150mW	SOD-523	6d	1a	Ttr
560	-	F1C560	TVS	Vrwm=48V, 6A, 500W(1ms)	DO-214AC	1d	1i	Org
56A	-	1.5SMC56A	TVS	Vrwm=47.8V, Vbr=53.2..58.8V, Ipp=19.5A, 1500W(1ms)	DO-214AB	1d	2s	Lif
56A	-	1.5SMC56A	TVS	Vrwm=47.8V, Vbr=53.2..58.8V, Ipp=19.5A, 1500W(1ms)	DO-214AB	1d	1b	Mde
56A	-	1.5SMC56A	TVS	Vrwm=47.8V, Vbr=53.2..58.8V, Ipp=19.5A, 1500W(1ms)	403	3d	2t	Ons
56A	-	1.5SMC56A	TVS	Vrwm=47.8V, Vbr=53.2..58.8V, Ipp=19.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
56A	-	P4SMA56A	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
56A	-	P4SMA56A	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 400W(1ms)	DO-214AC	1d	1k	Vs
56A	-	P6SMB56A	TVS	Vrwm=56V, Vbr=53.2..58.8V, 7.8A, 600W(1ms)	403A	3d	1s	Ons
56A	-	P6SMB56A	TVS	Vrwm=56V, Vbr=53.2..58.8V, 7.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
56A	-	P6SMBJ56A	TVS	Vrwm=56V, Vbr=50.4..61.6V, 7.8A, 600W(1ms)	DO-214AA	1d	1n	Lif
56A	-	SMAJP4KE56A	TVS	Vrwm=47.80V, Vbr=53.20..58.80V, Ipp=5.3A, 400W(1ms)	DO-214AC	1d	1a	Mco
56A	-	SMBJP6KE56A	TVS	Vrwm=47.80V, Vbr=53.20..58.80V, Ipp=7.9A, 600W(1ms)	DO-214AA	1d	1a	Mco
56A	-	SMCJ1.5KE56A	TVS	Vrwm=47.80V, Vbr=53.20..58.80V, Ipp=19.7A, 1500W(1ms)	DO-214AB	1d	1a	Mco
56A	-	SZP6SMB56A	TVS	Vrwm=56V, Vbr=53.2..58.8V, 7.8A, 600W(1ms)	403A	3d	1s	Ons
56A	-	TVP04A560A-G	TVS	Vbr=53.20..58.80V, Vrwm=47.8V, Ipp=5.19A, 400W(1ms)	DO-214AC	1d	2o	Cmc
56A	-	TVP06B56A-G	TVS	Vrwm=47.8V, Vbr=53.20..58.80V, Ipp=7.79A, 600W(1ms)	DO-214AA	1d	2o	Cmc
56B	-	1SMB3EZ56	Zener diode	56V±5%, Zzt=55Ω, Izt=13.0mA, 3W	DO-214AA	1d	1a	Pjt
56B	-	MMHZ5256BPT	Zener diode	28.50..31.50V, Izt=5mA, Zzt=78Ω, 225mW	SOD-123	5d	1a	Chm
56B	-	SMC5356B	Zener diode	19.0V±5%, Zzt=3.0(65.0mA), Izm=250.0mA, 5W	DO-214AB	1d	1a	Ers
56C	-	1.5SMC56CA	TVS	Vrwm=47.8V, Vbr=53.2..58.8V, Ipp=19.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
56C	-	1.5SMC56CA	TVS	Vrwm=47.8V, Vbr=53.2..58.8V, Ipp=19.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
56C	-	1.5SMC56CA	TVS	Vrwm=47.8V, Vbr=53.2..58.8V, Ipp=19.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
56C	-	P4SMA56C	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
56C	-	P4SMA56CA	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
56C	-	P6SMB56CA	TVS	Vrwm=56V, Vbr=53.2..58.8V, 7.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
56C	-	P6SMBJ56C	TVS	Vrwm=56V, Vbr=50.4..61.6V, 7.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
56C	-	SMAJP4KE56CA	TVS	Vrwm=47.80V, Vbr=53.20..58.80V, Ipp=5.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
56C	-	SMBJP6KE56CA	TVS	Vrwm=47.80V, Vbr=53.20..58.80V, Ipp=7.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
56C	-	SMCJ1.5KE56CA	TVS	Vrwm=47.80V, Vbr=53.20..58.80V, Ipp=19.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
56C	-	TVP04A560CA-G	TVS	Vbr=53.20..58.80V, Vrwm=47.8V, Ipp=5.19A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
56C	-	TVP06B56ACA-G	TVS	Vrwm=47.8V, Vbr=53.20..58.80V, Ipp=7.79A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
56CA	-	P4SMA56CA	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
56CA	-	P6SMB56CA	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 7.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
56CA	-	P6SMBJ56CA	TVS	Vrwm=56V, Vbr=50.4..61.6V, 7.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
56P	-	BZD27C56P	Zener diode	53.2..58.8V, Zzt=60Ω, Izt=10mA, 800mW	SOD-123FL	7d	1a	Pjt
56P	-	MFPZ56	Zener diode	53.20..58.80V, Izt=10mA, Zzt=60Ω, 800mW	SOD-123FL	7d	1a	Ttr
56S	-	MMHZ5256SPT	Zener diode	29.40..30.60V, Izt=5mA, Zzt=78Ω, 225mW	SOD-123	5d	1a	Chm
56VB	-	BZT52B56	Zener diode	54.88..57.12V, Izt=2mA, Zzt=200Ω, 500mW	SOD-123FL	7d	1a	Tsc
56VB	-	MMSZ56VBW	Zener diode	54.88..57.12V, Izt=2mA, Zzt=200Ω, 500mW	SOD-123FL	7d	1a	Tac
56VZ	-	BZT52C56	Zener diode	53.20..58.80V, Izt=2mA, Zzt=200Ω, 500mW	SOD-123FL	7d	1a	Tsc
56VZ	-	MMSZ56VCW	Zener diode	53.20..58.80V, Izt=2mA, Zzt=200Ω, 500mW	SOD-123FL	7d	1a	Tac
56VZ	-	TCMMSZ56V	Zener diode	56V±5%, Izt=5mA, Zzt=188Ω, 500mW	SOD-123FL	7d	1a	Tac
56VZ	-	ZGFM0556C-MH	Zener diode	53.20..58.8V, Izt=5mA, Zzt=188Ω, 500mW	SOD-123	5d	1a	Pic
56Z	-	HZU5.6Z	Zener diode	5.31..5.92V, Izt=5mA, 200mW	SOD-323	5d	1a	Ren
57	-	F1C57	TVS	Vrwm=6V, 40A, 500W(1ms)	DO-214AC	1d	1i	Org
57	-	HMSZ5257B	Zener diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 225mW	SOD-323	5d	1d	Hsn
57	-	MM5Z4V7	Zener diode	4.4..5.0V, Zzt=80Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
57	-	TCBZX584C4V7	Zener diode	4.4..5.0V, Izt=5mA, Zzt=80Ω, 200mW	SOD-523FL	7d	1a	Tac
57	-	TCMM5Z4V7	Zener diode	4.4..5.0V, Izt=5mA, Zzt=80Ω, 200mW	SOD-523FL	7d	1a	Tac
57	-	ZD5257BS2	Zener diode	33V±5%, 3.8mA, Zzt=58Ω, 500mW	SOD-323	5d	1a	Cys
575	-	F1C575	TVS	Vrwm=60V, 5A, 500W(1ms)	DO-214AC	1d	1i	Org
57B	-	MMHZ5257BPT	Zener diode	31.35..34.65V, Izt=5mA, Zzt=88Ω, 225mW	SOD-123	5d	1a	Chm
57B	-	SMC5357B	Zener diode	20.0V±5%, Zzt=3.0(65.0mA), Izm=237.0mA, 5W	DO-214AB	1d	1a	Ers
57S	-	MMHZ5257SPT	Zener diode	32.34..33.66V, Izt=5mA, Zzt=88Ω, 225mW	SOD-123	5d	1a	Chm
57ZD	-	BYD57D	Si-diode	U-fast Recovery, Contr.av., 200V, 1A, Vf<1.7V(1A), 50ns	1206	14d	1v	Zow
57ZG	-	BYD57G	Si-diode	U-fast Recovery, Contr.av., 400V, 1A, Vf<1.7V(1A), 50ns	1206	14d	1v	Zow
57ZJ	-	BYD57J	Si-diode	U-fast Recovery, Contr.av., 600V, 1A, Vf<1.7V(1A), 50ns	1206	14d	1v	Zow
57ZK	-	BYD57K	Si-diode	U-fast Recovery, Contr.av., 800V, 1A, Vf<1.7V(1A), 75ns	1206	14d	1v	Zow
57ZM	-	BYD57M	Si-diode	U-fast Recovery, Contr.av., 1000V, 1A, Vf<1.7V(1A), 75ns	1206	14d	1v	Zow
58	-	HMSZ5258B	Zener diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 225mW	SOD-323	5d	1d	Hsn
58	-	MM5Z5V1	Zener diode	4.8..5.4V, Zzt=60Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
58	-	SMBG58	TVS	Vrwm=58V, Vbr=64.4..81.6V, 5.8A, 600W(1ms)	DO-215AA	5d	1a	Msc
58	-	TCBZX584C5V1	Zener diode	4.8..5.4V, Izt=5mA, Zzt=60Ω, 200mW	SOD-523FL	7d	1a	Tac
58	-	TCMM5Z5V1	Zener diode	4.8..5.4V, Izt=5mA, Zzt=60Ω, 200mW	SOD-523FL	7d	1a	Tac
58A	-	1SMC58A	TVS	Vbr=64.4..71.2V, Vrwm=58V, 16.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
58A	-	MMF58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, Ipp=2.1A, 200W(1ms)	SOD-123FL	7d	2m	Sst
58A	-	SMAJ58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, 4.3A, 400W(1ms)	DO-214AC	1d	1a	Sus
58A	-	SMBG58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, 6.4A, 600W(1ms)	DO-215AA	5d	1a	Msc
58A	-	SMBJ58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, 6.4A, 600W(1ms)	DO-214AA	1d	1a	Sus
58A	-	SMCJ58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, 14.6A, 1500W(1ms)	DO-214AB	1d	1k	Sus
58A	-	SMF58A	TVS	Vbr=64.4..71.2V, Vrwm=58V, Ipp=2.1A, 200W(1ms)	SOD-123FL	7d	1a	Mco
58A	-	UMA58A	TVS	Vrwm=58V, Vbr=64.4..93.6V, 5.3A, 500W(1ms)	UltraMite	14d	1v	Msc
58B	-	MMHZ5258BPT	Zener diode	34.20..37.80V, Izt=5mA, Zzt=95Ω, 225mW	SOD-123	5d	1a	Chm
58B	-	SMC5358B	Zener diode	22.0V±5%, Zzt=4.0(50.0mA), Izm=216.0mA, 5W	DO-214AB	1d	1a	Ers
58C	-	SMBG58C	TVS	Vrwm=58V, Vbr=64.4..81.6V, 5.8A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
58CA	-	1SMC58CA	TVS	Vbr=64.4..71.2V, Vrwm=58V, 16.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
58CA	-	MMF58CA	TVS	Vrwm=58V, Vbr=64.4..74.1V, Ipp=2.1A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
58CA	-	SMAJ58CA	TVS	Vrwm=58V, Vbr=64.4..71.2V, 4.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
58CA	-	SMBG58CA	TVS	Vrwm=58V, Vbr=64.4..74.1V, 6.4A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
58CA	-	SMBJ58CA	TVS	Vrwm=58V, Vbr=64.4..74.1V, 6.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
58CA	-	SMCJ58CA	TVS	Vrwm=58V, Vbr=64.4..74.1V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
58CA	-	SMF58CA	TVS	Vbr=64.4..71.2V, Vrwm=58V, Ipp=2.1A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
58CA	-	UMA58CA	TVS	Vrwm=58V, Vbr=64.4..93.6V, 5.3A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
58S	-	MMHZ5258SPT	Zener diode	35.28..36.72V, Izt=5mA, Zzt=95Ω, 225mW	SOD-123	5d	1a	Chm
58V	-	SMA58	TVS	Vbr=64.4..78.7V, Vrwm=58.0V, 2.9A, 300W(1ms)	DO-214AC	1d	1a	Mic
58V	-	SMB58	TVS	Vbr=64.4..78.7V, Vrwm=58V, 5.8A, 600W(1ms)	DO-214AA	1d	1a	Mic
58V	-	SMC58	TVS	Vbr=64.4..78.7V, Vrwm=58V, 14.6A, 1500W(1ms),	DO-214AB	1d	1a	Mic
58VA	-	SMA58A	TVS	Vbr=64.4..71.2V, Vrwm=58.0V, 3.2A, 300W(1ms)	DO-214AC	1d	1a	Mic
58VA	-	SMB58A	TVS	Vbr=64.4..71.2V, Vrwm=58V, 6.4A, 600W(1ms)	DO-214AA	1d	1a	Mic
58VA	-	SMC58A	TVS	Vbr=64.4..71.2V, Vrwm=58V, 16A, 1500W(1ms),	DO-214AB	1d	1a	Mic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
58VC	-	SMA58C	TVS	Vbr=64.4..78.7V, Vrwm=58.0V, 2.9A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
58VC	-	SMB58C	TVS	Vbr=64.4..78.7V, Vrwm=58V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
58VC	-	SMC58C	TVS	Vbr=64.4..78.7V, Vrwm=58V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
58VCA	-	SMA58CA	TVS	Vbr=64.4..71.2V, Vrwm=58.0V, 3.2A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
58VCA	-	SMB58CA	TVS	Vbr=64.4..71.2V, Vrwm=58V, 6.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
58VCA	-	SMC58CA	TVS	Vbr=64.4..71.2V, Vrwm=58V, 16A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
59	-	HMSZ5259B	Zener diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 225mW	SOD-323	5d	1d	Hsn
59	-	MM5Z5V6	Zener diode	5.2..6.0V, Zzt=40Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
59	-	TCBZX584C5V6	Zener diode	5.2..6.0V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523FL	7d	1a	Tac
59	-	TCMM5Z5V6	Zener diode	5.2..6.0V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523FL	7d	1a	Tac
5913A	-	1SMA5913A	Zener diode	3.3V±10%, Zzt=10Ω, Izm<455mA, 1.5W	DO-214AC	1d	1a	Eic
5913B	-	1SMA5913B	Zener diode	3.3V±5%, Zzt=10Ω, Izm<455mA, 1.5W	DO-214AC	1d	1a	Eic
5913B	-	SMA5913B	Zener diode	3.3V±5%, Izt=113.6mA, Zzt<10Ω, 1.5W	DO-214AC	1d	1t	Exc
5913B	-	SMB5913B	Zener diode	3.3V±5%, Izt=113.6mA, Zzt=10.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5913B3	-	SMB5913B3	Zener diode	3.3V±5%, Izt=113.6mA, Zzt=10.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5914A	-	1SMA5914A	Zener diode	3.6V±10%, Zzt=9Ω, Izm<417mA, 1.5W	DO-214AC	1d	1a	Eic
5914B	-	1SMA5914B	Zener diode	3.6V±5%, Zzt=9Ω, Izm<417mA, 1.5W	DO-214AC	1d	1a	Eic
5914B	-	SMA5914B	Zener diode	3.6V±5%, Izt=104.2mA, Zzt<9Ω, 1.5W	DO-214AC	1d	1t	Exc
5914B	-	SMB5914B	Zener diode	3.6V±5%, 104.2mA, Zzt<9Ω, 1.5W	DO-214AA	1d	1t	Exc
5914B3	-	SMB5914B3	Zener diode	3.6V±5%, 104.2mA, Zzt<9Ω, 3W	DO-214AA	1d	1t	Exc
5915A	-	1SMA5915A	Zener diode	3.9V±10%, Zzt=7.5Ω, Izm<385mA, 1.5W	DO-214AC	1d	1a	Eic
5915B	-	1SMA5915B	Zener diode	3.9V±5%, Zzt=7.5Ω, Izm<385mA, 1.5W	DO-214AC	1d	1a	Eic
5915B	-	SMA5915B	Zener diode	3.9V±5%, Izt=96.1mA, Zzt<7.5Ω, 1.5W	DO-214AC	1d	1t	Exc
5915B	-	SMB5915B	Zener diode	3.9V±5%, Izt=96.1mA, Zzt=7.5Ω, 1.5W	DO-214AA	1d	1t	Exc
5915B3	-	SMB5915B3	Zener diode	3.9V±5%, 96.1mA, Zzt<7.5Ω, 3W	DO-214AA	1d	1t	Exc
5916A	-	1SMA5916A	Zener diode	4.3V±10%, Zzt=6Ω, Izm<349mA, 1.5W	DO-214AC	1d	1a	Eic
5916B	-	1SMA5916B	Zener diode	4.3V±5%, Zzt=6Ω, Izm<349mA, 1.5W	DO-214AC	1d	1a	Eic
5916B	-	SMA5916B	Zener diode	4.3V±5%, Izt=87.2mA, Zzt<6Ω, 1.5W	DO-214AC	1d	1t	Exc
5916B	-	SMB5916B	Zener diode	4.3V±5%, Izt=87.2mA, Zzt=6.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5916B3	-	SMB5916B3	Zener diode	4.3V±5%, 87.2mA, Zzt<6Ω, 3W	DO-214AA	1d	1t	Exc
5917A	-	1SMA5917A	Zener diode	4.7V±10%, Zzt=5Ω, Izm<319mA, 1.5W	DO-214AC	1d	1a	Eic
5917B	-	1SMA5917B	Zener diode	4.7V±5%, Zzt=5Ω, Izm<319mA, 1.5W	DO-214AC	1d	1a	Eic
5917B	-	SMA5917B	Zener diode	4.7V±5%, Izt=79.8mA, Zzt<5Ω, 1.5W	DO-214AC	1d	1t	Exc
5917B	-	SMB5917B	Zener diode	4.7V±5%, Izt=79.8mA, Zzt=5.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5918A	-	1SMA5918A	Zener diode	5.1V±10%, Zzt=4Ω, Izm<294mA, 1.5W	DO-214AC	1d	1a	Eic
5918B	-	1SMA5918B	Zener diode	5.1V±5%, Zzt=4Ω, Izm<294mA, 1.5W	DO-214AC	1d	1a	Eic
5918B	-	SMA5918B	Zener diode	5.1V±5%, Izt=73.5mA, Zzt<4Ω, 1.5W	DO-214AC	1d	1t	Exc
5918B	-	SMB5918B	Zener diode	5.1V±5%, Izt=73.5mA, Zzt=4.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5919A	-	1SMA5919A	Zener diode	5.6V±10%, Zzt=2Ω, Izm<268mA, 1.5W	DO-214AC	1d	1a	Eic
5919B	-	1SMA5919B	Zener diode	5.6V±5%, Zzt=2Ω, Izm<268mA, 1.5W	DO-214AC	1d	1a	Eic
5919B	-	SMA5919B	Zener diode	5.6V±5%, Izt=66.9mA, Zzt<2Ω, 1.5W	DO-214AC	1d	1t	Exc
5919B	-	SMB5919B	Zener diode	5.6V±5%, Izt=66.9mA, Zzt=2.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5920A	-	1SMA5920A	Zener diode	6.2V±10%, Zzt=2Ω, Izm<242mA, 1.5W	DO-214AC	1d	1a	Eic
5920B	-	1SMA5920B	Zener diode	6.2V±5%, Zzt=2Ω, Izm<242mA, 1.5W	DO-214AC	1d	1a	Eic
5920B	-	SMA5920B	Zener diode	6.2V±5%, Izt=60.5mA, Zzt<2Ω, 1.5W	DO-214AC	1d	1t	Exc
5920B	-	SMB5920B	Zener diode	6.2V±5%, Izt=60.5mA, Zzt=2.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5921A	-	1SMA5921A	Zener diode	6.8V±10%, Zzt=2.5Ω, Izm<221mA, 1.5W	DO-214AC	1d	1a	Eic
5921B	-	1SMA5921B	Zener diode	6.8V±5%, Zzt=2.5Ω, Izm<221mA, 1.5W	DO-214AC	1d	1a	Eic
5921B	-	SMA5921B	Zener diode	6.8V±5%, Izt=55.1mA, Zzt<2.5Ω, 1.5W	DO-214AC	1d	1t	Exc
5921B	-	SMB5921B	Zener diode	6.8V±5%, Izt=55.1mA, Zzt=2.5Ω, 1.5W	DO-214AA	1d	1t	Exc
5922A	-	1SMA5922A	Zener diode	7.5V±10%, Zzt=3Ω, Izm<200mA, 1.5W	DO-214AC	1d	1a	Eic
5922B	-	1SMA5922B	Zener diode	7.5V±5%, Zzt=3Ω, Izm<200mA, 1.5W	DO-214AC	1d	1a	Eic
5922B	-	SMA5922B	Zener diode	7.5V±5%, Izt=50mA, Zzt<3Ω, 1.5W	DO-214AC	1d	1t	Exc
5922B	-	SMB5922B	Zener diode	7.5V±5%, Izt=50.0mA, Zzt=3.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5923A	-	1SMA5923A	Zener diode	8.2V±10%, Zzt=3.5Ω, Izm<183mA, 1.5W	DO-214AC	1d	1a	Eic
5923B	-	1SMA5923B	Zener diode	8.2V±5%, Zzt=3.5Ω, Izm<183mA, 1.5W	DO-214AC	1d	1a	Eic
5923B	-	SMA5923B	Zener diode	8.2V±5%, Izt=45.7mA, Zzt<3.5Ω, 1.5W	DO-214AC	1d	1t	Exc
5923B	-	SMB5923B	Zener diode	8.2V±5%, Izt=45.7mA, Zzt=3.5Ω, 1.5W	DO-214AA	1d	1t	Exc
5924A	-	1SMA5924A	Zener diode	9.1V±10%, Zzt=4Ω, Izm<165mA, 1.5W	DO-214AC	1d	1a	Eic
5924B	-	1SMA5924B	Zener diode	9.1V±5%, Zzt=4Ω, Izm<165mA, 1.5W	DO-214AC	1d	1a	Eic
5924B	-	SMA5924B	Zener diode	9.1V±5%, Izt=41.2mA, Zzt<4Ω, 1.5W	DO-214AC	1d	1t	Exc
5924B	-	SMB5924B	Zener diode	9.1V±5%, Izt=41.2mA, Zzt=4.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5925A	-	1SMA5925A	Zener diode	10V±10%, Zzt=4.5Ω, Izm<150mA, 1.5W	DO-214AC	1d	1a	Eic
5925B	-	1SMA5925B	Zener diode	10V±5%, Zzt=4.5Ω, Izm<150mA, 1.5W	DO-214AC	1d	1a	Eic
5925B	-	SMA5925B	Zener diode	10V±5%, Izt=37.5mA, Zzt<4.5Ω, 1.5W	DO-214AC	1d	1t	Exc
5925B	-	SMB5925B	Zener diode	10V±5%, Izt=37.5mA, Zzt=4.5Ω, 1.5W	DO-214AA	1d	1t	Exc
5926A	-	1SMA5926A	Zener diode	11V±10%, Zzt=5.5Ω, Izm<136mA, 1.5W	DO-214AC	1d	1a	Eic
5926B	-	1SMA5926B	Zener diode	11V±5%, Zzt=5.5Ω, Izm<136mA, 1.5W	DO-214AC	1d	1a	Eic
5926B	-	SMA5926B	Zener diode	11V±5%, Izt=34.1mA, Zzt<5.5Ω, 1.5W	DO-214AC	1d	1t	Exc
5926B	-	SMB5926B	Zener diode	11V±5%, Izt=34.1mA, Zzt=5.5Ω, 1.5W	DO-214AA	1d	1t	Exc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5927A	-	1SMA5927A	Zener diode	12V±10%, Zzt=6.5Ω, Izm<125mA, 1.5W	DO-214AC	1d	1a	Eic
5927B	-	1SMA5927B	Zener diode	12V±5%, Zzt=6.5Ω, Izm<125mA, 1.5W	DO-214AC	1d	1a	Eic
5927B	-	SMA5927B	Zener diode	12V±5%, Izt=31.2mA, Zzt<6.5Ω, 1.5W	DO-214AC	1d	1t	Exc
5927B	-	SMB5927B	Zener diode	12V±5%, Izt=31.2mA, Zzt=6.5Ω, 1.5W	DO-214AA	1d	1t	Exc
5928A	-	1SMA5928A	Zener diode	13V±10%, Zzt=7Ω, Izm<115mA, 1.5W	DO-214AC	1d	1a	Eic
5928B	-	1SMA5928B	Zener diode	13V±5%, Zzt=7Ω, Izm<115mA, 1.5W	DO-214AC	1d	1a	Eic
5928B	-	SMA5928B	Zener diode	13V±5%, Izt=28.8mA, Zzt<7Ω, 1.5W	DO-214AC	1d	1t	Exc
5928B	-	SMB5928B	Zener diode	13V±5%, Izt=28.8mA, Zzt=7.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5929A	-	1SMA5929A	Zener diode	15V±10%, Zzt=9Ω, Izm<100mA, 1.5W	DO-214AC	1d	1a	Eic
5929B	-	1SMA5929B	Zener diode	15V±5%, Zzt=9Ω, Izm<100mA, 1.5W	DO-214AC	1d	1a	Eic
5929B	-	SMA5929B	Zener diode	15V±5%, Izt=25mA, Zzt<9Ω, 1.5W	DO-214AC	1d	1t	Exc
5929B	-	SMB5929B	Zener diode	15V±5%, Izt=25.0mA, Zzt=9.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5930A	-	1SMA5930A	Zener diode	16V±10%, Zzt=10Ω, Izm<94mA, 1.5W	DO-214AC	1d	1a	Eic
5930B	-	1SMA5930B	Zener diode	16V±5%, Zzt=10Ω, Izm<94mA, 1.5W	DO-214AC	1d	1a	Eic
5930B	-	SMA5930B	Zener diode	16V±5%, Izt=23.4mA, Zzt<10Ω, 1.5W	DO-214AC	1d	1t	Exc
5930B	-	SMB5930B	Zener diode	16V±5%, Izt=23.4mA, Zzt=10.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5931A	-	1SMA5931A	Zener diode	18V±10%, Zzt=12Ω, Izm<83mA, 1.5W	DO-214AC	1d	1a	Eic
5931B	-	1SMA5931B	Zener diode	18V±5%, Zzt=12Ω, Izm<83mA, 1.5W	DO-214AC	1d	1a	Eic
5931B	-	SMA5931B	Zener diode	18V±5%, Izt=20.8mA, Zzt<12Ω, 1.5W	DO-214AC	1d	1t	Exc
5931B	-	SMB5931B	Zener diode	18V±5%, Izt=20.8mA, Zzt=12.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5932A	-	1SMA5932A	Zener diode	20V±10%, Zzt=14Ω, Izm<75mA, 1.5W	DO-214AC	1d	1a	Eic
5932B	-	1SMA5932B	Zener diode	20V±5%, Zzt=14Ω, Izm<75mA, 1.5W	DO-214AC	1d	1a	Eic
5932B	-	SMA5932B	Zener diode	20V±5%, Izt=18.7mA, Zzt<14Ω, 1.5W	DO-214AC	1d	1t	Exc
5932B	-	SMB5932B	Zener diode	20V±5%, Izt=18.7mA, Zzt=14.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5933A	-	1SMA5933A	Zener diode	22V±10%, Zzt=17.5Ω, Izm<68mA, 1.5W	DO-214AC	1d	1a	Eic
5933B	-	1SMA5933B	Zener diode	22V±5%, Zzt=17.5Ω, Izm<68mA, 1.5W	DO-214AC	1d	1a	Eic
5933B	-	SMA5933B	Zener diode	22V±5%, Izt=17mA, Zzt<17.5Ω, 1.5W	DO-214AC	1d	1t	Exc
5933B	-	SMB5933B	Zener diode	22V±5%, Izt=17.0mA, Zzt=17.5Ω, 1.5W	DO-214AA	1d	1t	Exc
5934A	-	1SMA5934A	Zener diode	24V±10%, Zzt=19Ω, Izm<63mA, 1.5W	DO-214AC	1d	1a	Eic
5934B	-	1SMA5934B	Zener diode	24V±5%, Zzt=19Ω, Izm<63mA, 1.5W	DO-214AC	1d	1a	Eic
5934B	-	SMA5934B	Zener diode	24V±5%, Izt=15.6mA, Zzt<19Ω, 1.5W	DO-214AC	1d	1t	Exc
5934B	-	SMB5934B	Zener diode	24V±5%, Izt=15.6mA, Zzt=19.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5935A	-	1SMA5935A	Zener diode	27V±10%, Zzt=23Ω, Izm<56mA, 1.5W	DO-214AC	1d	1a	Eic
5935B	-	1SMA5935B	Zener diode	27V±5%, Zzt=23Ω, Izm<56mA, 1.5W	DO-214AC	1d	1a	Eic
5935B	-	SMA5935B	Zener diode	27V±5%, Izt=13.9mA, Zzt<23Ω, 1.5W	DO-214AC	1d	1t	Exc
5935B	-	SMB5935B	Zener diode	27V±5%, Izt=13.9mA, Zzt=23.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5936A	-	1SMA5936A	Zener diode	30V±10%, Zzt=26Ω, Izm<50mA, 1.5W	DO-214AC	1d	1a	Eic
5936B	-	1SMA5936B	Zener diode	30V±5%, Zzt=26Ω, Izm<50mA, 1.5W	DO-214AC	1d	1a	Eic
5936B	-	SMA5936B	Zener diode	30V±5%, Izt=12.5mA, Zzt<26Ω, 1.5W	DO-214AC	1d	1t	Exc
5936B	-	SMB5936B	Zener diode	30V±5%, Izt=12.5mA, Zzt=28.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5936B3	-	SMB5936B3	Zener diode	30V±5%, Izt=12.5mA, Zzt=28.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5937A	-	1SMA5937A	Zener diode	33V±10%, Zzt=33Ω, Izm<45mA, 1.5W	DO-214AC	1d	1a	Eic
5937B	-	1SMA5937B	Zener diode	33V±5%, Zzt=33Ω, Izm<45mA, 1.5W	DO-214AC	1d	1a	Eic
5937B	-	SMA5937B	Zener diode	33V±5%, Izt=11.4mA, Zzt<33Ω, 1.5W	DO-214AC	1d	1t	Exc
5937B	-	SMB5937B	Zener diode	33V±5%, Izt=11.4mA, Zzt=33.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5938A	-	1SMA5938A	Zener diode	36V±10%, Zzt=38Ω, Izm<42mA, 1.5W	DO-214AC	1d	1a	Eic
5938B	-	1SMA5938B	Zener diode	36V±5%, Zzt=38Ω, Izm<42mA, 1.5W	DO-214AC	1d	1a	Eic
5938B	-	SMA5938B	Zener diode	36V±5%, Izt=10.4mA, Zzt<38Ω, 1.5W	DO-214AC	1d	1t	Exc
5938B	-	SMB5938B	Zener diode	36V±5%, Izt=10.4mA, Zzt=38.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5939A	-	1SMA5939A	Zener diode	39V±10%, Zzt=45Ω, Izm<38mA, 1.5W	DO-214AC	1d	1a	Eic
5939B	-	1SMA5939B	Zener diode	39V±5%, Zzt=45Ω, Izm<38mA, 1.5W	DO-214AC	1d	1a	Eic
5939B	-	SMA5939B	Zener diode	39V±5%, Izt=9.6mA, Zzt<45Ω, 1.5W	DO-214AC	1d	1t	Exc
5939B	-	SMB5939B	Zener diode	39V±5%, Izt=9.6mA, Zzt=45.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5940A	-	1SMA5940A	Zener diode	43V±10%, Zzt=53Ω, Izm<35mA, 1.5W	DO-214AC	1d	1a	Eic
5940B	-	1SMA5940B	Zener diode	43V±5%, Zzt=53Ω, Izm<35mA, 1.5W	DO-214AC	1d	1a	Eic
5940B	-	SMA5940B	Zener diode	43V±5%, Izt=8.7mA, Zzt<53Ω, 1.5W	DO-214AC	1d	1t	Exc
5940B	-	SMB5940B	Zener diode	43V±5%, Izt=8.7mA, Zzt=53.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5941A	-	1SMA5941A	Zener diode	47V±10%, Zzt=67Ω, Izm<32mA, 1.5W	DO-214AC	1d	1a	Eic
5941B	-	1SMA5941B	Zener diode	47V±5%, Zzt=67Ω, Izm<32mA, 1.5W	DO-214AC	1d	1a	Eic
5941B	-	SMA5941B	Zener diode	47V±5%, Izt=8mA, Zzt<67Ω, 1.5W	DO-214AC	1d	1t	Exc
5941B	-	SMB5941B	Zener diode	47V±5%, Izt=8.0mA, Zzt=67.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5942A	-	1SMA5942A	Zener diode	51V±10%, Zzt=70Ω, Izm<29mA, 1.5W	DO-214AC	1d	1a	Eic
5942B	-	1SMA5942B	Zener diode	51V±5%, Zzt=70Ω, Izm<29mA, 1.5W	DO-214AC	1d	1a	Eic
5942B	-	SMA5942B	Zener diode	51V±5%, Izt=7.3mA, Zzt<70Ω, 1.5W	DO-214AC	1d	1t	Exc
5942B	-	SMB5942B	Zener diode	51V±5%, Izt=7.3mA, Zzt=70.0Ω, 1.5W	DO-214AA	1d	1t	Exc
5943A	-	1SMA5943A	Zener diode	56V±10%, Zzt=86Ω, Izm<27mA, 1.5W	DO-214AC	1d	1a	Eic
5943B	-	1SMA5943B	Zener diode	56V±5%, Zzt=86Ω, Izm<27mA, 1.5W	DO-214AC	1d	1a	Eic
5944A	-	1SMA5944A	Zener diode	62V±10%, Zzt=100Ω, Izm<24mA, 1.5W	DO-214AC	1d	1a	Eic
5944B	-	1SMA5944B	Zener diode	62V±5%, Zzt=100Ω, Izm<24mA, 1.5W	DO-214AC	1d	1a	Eic
5945A	-	1SMA5945A	Zener diode	68V±10%, Zzt=120Ω, Izm<22mA, 1.5W	DO-214AC	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5945B	-	1SMA5945B	Zener diode	68V±5%, Zzt=120Ω, Izm<22mA, 1.5W	DO-214AC	1d	1a	Eic
5946A	-	1SMA5946A	Zener diode	75V±10%, Zzt=140Ω, Izm<20mA, 1.5W	DO-214AC	1d	1a	Eic
5946B	-	1SMA5946B	Zener diode	75V±5%, Zzt=140Ω, Izm<20mA, 1.5W	DO-214AC	1d	1a	Eic
5947A	-	1SMA5947A	Zener diode	82V±10%, Zzt=160Ω, Izm<18mA, 1.5W	DO-214AC	1d	1a	Eic
5947B	-	1SMA5947B	Zener diode	82V±5%, Zzt=160Ω, Izm<18mA, 1.5W	DO-214AC	1d	1a	Eic
5948A	-	1SMA5948A	Zener diode	91V±10%, Zzt=200Ω, Izm<16mA, 1.5W	DO-214AC	1d	1a	Eic
5948B	-	1SMA5948B	Zener diode	91V±5%, Zzt=200Ω, Izm<16mA, 1.5W	DO-214AC	1d	1a	Eic
5949A	-	1SMA5949A	Zener diode	100V±10%, Zzt=250Ω, Izm<15mA, 1.5W	DO-214AC	1d	1a	Eic
5949B	-	1SMA5949B	Zener diode	100V±5%, Zzt=250Ω, Izm<15mA, 1.5W	DO-214AC	1d	1a	Eic
5950A	-	1SMA5950A	Zener diode	110V±10%, Zzt=300Ω, Izm<13mA, 1.5W	DO-214AC	1d	1a	Eic
5950B	-	1SMA5950B	Zener diode	110V±5%, Zzt=300Ω, Izm<13mA, 1.5W	DO-214AC	1d	1a	Eic
5951A	-	1SMA5951A	Zener diode	120V±10%, Zzt=380Ω, Izm<12mA, 1.5W	DO-214AC	1d	1a	Eic
5951B	-	1SMA5951B	Zener diode	120V±5%, Zzt=380Ω, Izm<12mA, 1.5W	DO-214AC	1d	1a	Eic
5952A	-	1SMA5952A	Zener diode	130V±10%, Zzt=450Ω, Izm<11mA, 1.5W	DO-214AC	1d	1a	Eic
5952B	-	1SMA5952B	Zener diode	130V±5%, Zzt=450Ω, Izm<11mA, 1.5W	DO-214AC	1d	1a	Eic
5953A	-	1SMA5953A	Zener diode	150V±10%, Zzt=600Ω, Izm<10mA, 1.5W	DO-214AC	1d	1a	Eic
5953B	-	1SMA5953B	Zener diode	150V±5%, Zzt=600Ω, Izm<10mA, 1.5W	DO-214AC	1d	1a	Eic
5954A	-	1SMA5954A	Zener diode	160V±10%, Zzt=700Ω, Izm<9mA, 1.5W	DO-214AC	1d	1a	Eic
5954B	-	1SMA5954B	Zener diode	160V±5%, Zzt=700Ω, Izm<9mA, 1.5W	DO-214AC	1d	1a	Eic
5955A	-	1SMA5955A	Zener diode	180V±10%, Zzt=900Ω, Izm<8mA, 1.5W	DO-214AC	1d	1a	Eic
5955B	-	1SMA5955B	Zener diode	180V±5%, Zzt=900Ω, Izm<8mA, 1.5W	DO-214AC	1d	1a	Eic
5956A	-	1SMA5956A	Zener diode	200V±10%, Zzt=1200Ω, Izm<7mA, 1.5W	DO-214AC	1d	1a	Eic
5956B	-	1SMA5956B	Zener diode	200V±5%, Zzt=1200Ω, Izm<7mA, 1.5W	DO-214AC	1d	1a	Eic
5957A	-	1SMA5957A	Zener diode	240V±10%, Zzt=1600Ω, Izm<6mA, 1.5W	DO-214AC	1d	1a	Eic
5957B	-	1SMA5957B	Zener diode	240V±5%, Zzt=1600Ω, Izm<6mA, 1.5W	DO-214AC	1d	1a	Eic
59B	-	MMHZ5259BPT	Zener diode	37.05..40.95V, Izt=5mA, Zzt=130Ω, 225mW	SOD-123	5d	1a	Chm
59B	-	SMC5359B	Zener diode	24.0V±5%, Zzt=4.0(50.0mA), Izm=198.0mA, 5W	DO-214AB	1d	1a	Ers
59S	-	MMHZ5259SPT	Zener diode	38.22..39.78V, Izt=5mA, Zzt=130Ω, 225mW	SOD-123	5d	1a	Chm
5A	-	CDZ55C5V1T	Zener diode	4.85..5.36V, Zzt=50Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
5A	-	CH601H-90PT	Si-diode	SBD, 90V, 100mA, Vf<0.77V(100mA)	SOD-323	5d	1a	Chm
5A	-	FSS16SMB	Si-diode	SBR, 60V, 1A, Vf<0.75V(1A)	DO-214AA	1d	2j	Fag
5A	-	HZU5ALL	Zener diode	4.3..4.7V, Izt=0.5mA, Zzt=380Ω, 150mW	URP	5d	1a	Ren
5A	-	MM1Z9V1	Zener diode	9.1V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Eic
5A	-	MM5Z6V2	Zener diode	5.8..6.6V, Zzt=10Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
5A	-	MMDL6050	Si-diode	Sw, 70V, 200mA, 200mW, Vf<1.1V(100mA), <4ns	SOD-323	5d	1a	Ons
5A	-	MMSZ9V1	Zener diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1a	Eic
5A	-	S5A	Si-diode	Rectifier, 50V, 5A, Vf<1.15V(5A)	DO-214AB	1d	1k	Vs
5A	-	TCBZX584C6V2	Zener diode	5.8..6.6V, Izt=5mA, Zzt=10Ω, 200mW	SOD-523FL	7d	1a	Tac
5A	-	TCMM5Z6V2	Zener diode	5.8..6.6V, Izt=5mA, Zzt=10Ω, 200mW	SOD-523FL	7d	1a	Tac
5A1	-	RKZ5.1AKU	Zener diode	4.81..5.07V, Izt=20mA, Zzt=130Ω, 500mW	TURP-FM	7d	1a	Ren
5A1	-	STZ8240C	Zener diode	24.35..25.6V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323	5d	1a	Jiy
5A6	-	RKZ5.6AKU	Zener diode	5.28..5.55V, Izt=20mA, Zzt=80Ω, 500mW	TURP-FM	7d	1a	Ren
5AD	-	SMA5J5.0	TVS	Vbr=6.40..7.82V, Vrwm=5.0V, 52.1A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AD	-	SMA5J5.0C	TVS	Vbr=6.40..7.82V, Vrwm=5.0V, 52.1A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AD	-	TV05A5V0K-G	TVS	Vbr=6.40..7.30V, Vrwm=5.0V, Ipp=52.1A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AE	-	SMA5J5.0A	TVS	Vbr=6.40..7.07V, Vrwm=5.0V, 54.3A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AE	-	SMA5J5.0CA	TVS	Vbr=6.40..7.07V, Vrwm=5.0V, 54.3A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AE	-	TV05A5V0J-G	TVS	Vbr=6.40..7.0V, Vrwm=5.0V, Ipp=54.3A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AF	-	SMA5J6.0	TVS	Vbr=6.67..8.15V, Vrwm=6.0V, 43.9A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AF	-	SMA5J6.0C	TVS	Vbr=6.67..8.15V, Vrwm=6.0V, 43.9A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AF	-	TV05A6V0K-G	TVS	Vbr=6.67..8.15V, Vrwm=6.0V, Ipp=43.9A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AG	-	SMA5J6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 48.5A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AG	-	SMA5J6.0CA	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 48.5A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AG	-	TV05A6V0J-G	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, Ipp=48.5A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AH	-	SMA5J6.5	TVS	Vbr=7.22..8.82V, Vrwm=6.5V, 40.7A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AH	-	SMA5J6.5C	TVS	Vbr=7.22..8.82V, Vrwm=6.5V, 40.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AH	-	TV05A6V5K-G	TVS	Vbr=7.22..8.82V, Vrwm=6.50V, Ipp=40.7A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AK	-	SMA5J6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 44.6A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AK	-	SMA5J6.5CA	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 44.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AK	-	TV05A6V5J-G	TVS	Vbr=7.22..7.98V, Vrwm=6.50V, Ipp=44.6A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AL	-	SMA5J7.0	TVS	Vbr=7.78..9.51V, Vrwm=7.0V, 37.6A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AL	-	SMA5J7.0C	TVS	Vbr=7.78..9.51V, Vrwm=7.0V, 37.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AL	-	TV05A7V0K-G	TVS	Vbr=7.78..9.51V, Vrwm=7.0V, Ipp=37.6A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AM	-	SMA5J7.0A	TVS	Vbr=7.78..8.60V, Vrwm=7.0V, 41.7A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AM	-	SMA5J7.0CA	TVS	Vbr=7.78..8.6V, Vrwm=7.0V, 41.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AM	-	TV05A7V0J-G	TVS	Vbr=7.78..8.60V, Vrwm=7.0V, Ipp=41.7A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AN	-	SMA5J7.5	TVS	Vbr=8.33..10.2V, Vrwm=7.5V, 35.0A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AN	-	SMA5J7.5C	TVS	Vbr=8.33..10.2V, Vrwm=7.5V, 35.0A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AN	-	TV05A7V5K-G	TVS	Vbr=8.33..10.2V, Vrwm=7.50V, Ipp=35.0A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AP	-	SMA5J7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 38.8A, 500W(1ms)	DO-214AC	1d	1k	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5AP	-	SMA5J7.5CA	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 38.8A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AP	-	TV05A7V5J-G	TVS	Vbr=8.33..9.21V, Vrwm=7.50V, Ipp=38.8A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AQ	-	SMA5J8.0	TVS	Vbr=8.89..10.9V, Vrwm=8.0V, 33.3A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AQ	-	SMA5J8.0C	TVS	Vbr=8.89..10.9V, Vrwm=8.0V, 33.3A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AQ	-	TV05A8V0K-G	TVS	Vbr=8.89..10.9V, Vrwm=8.0V, Ipp=33.3A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AR	-	SMA5J8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 36.8A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AR	-	SMA5J8.0CA	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 36.8A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AR	-	TV05A8V0J-G	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, Ipp=36.8A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AS	-	SMA5J8.5	TVS	Vbr=9.44..11.5V, Vrwm=8.5V, 31.4A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AS	-	SMA5J8.5C	TVS	Vbr=9.44..11.5V, Vrwm=8.5V, 31.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AS	-	TV05A8V5K-G	TVS	Vbr=9.44..11.5V, Vrwm=8.50V, Ipp=31.4A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AT	-	SMA5J8.5A	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 34.7A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AT	-	SMA5J8.5CA	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 34.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AT	-	TV05A8V5J-G	TVS	Vbr=9.44..10.4V, Vrwm=8.50V, Ipp=34.7A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AU	-	SMA5J9.0	TVS	Vbr=10.0..12.2V, Vrwm=9.0V, 29.6A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AU	-	SMA5J9.0C	TVS	Vbr=10.0..12.2V, Vrwm=9.0V, 29.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AU	-	TV05A9V0K-G	TVS	Vbr=10.0..12.2V, Vrwm=9.0V, Ipp=29.6A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AV	-	SMA5J9.0A	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 32.5A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AV	-	SMA5J9.0CA	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 32.5A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AV	-	TV05A9V0J-G	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, Ipp=32.5A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AW	-	SMA5J10	TVS	Vbr=11.1..13.6V, Vrwm=10V, 26.6A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AW	-	SMA5J10C	TVS	Vbr=11.1..13.6V, Vrwm=10V, 26.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AW	-	TV05A100K-G	TVS	Vbr=11.1..13.6V, Vrwm=10.0V, Ipp=26.6A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AX	-	5KASMC10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, Ipp=294.1A, 5000W (1ms)	DO-214AB	1d	1k	Vs
5AX	-	SMA5J10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, 29.4A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AX	-	SMA5J10CA	TVS	Vbr=11.1..12.3V, Vrwm=10V, 29.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AX	-	TV05A100J-G	TVS	Vbr=11.1..12.3V, Vrwm=10.0V, Ipp=29.4A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AY	-	SMA5J11	TVS	Vbr=12.2..14.9V, Vrwm=11V, 24.9A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AY	-	SMA5J11C	TVS	Vbr=12.2..14.9V, Vrwm=11V, 24.9A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AY	-	TV05A110K-G	TVS	Vbr=12.2..14.9V, Vrwm=11.0V, Ipp=24.9A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5AZ	-	SMA5J11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, 27.5A, 500W(1ms)	DO-214AC	1d	1k	Vs
5AZ	-	SMA5J11CA	TVS	Vbr=12.2..13.5V, Vrwm=11V, 27.5A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5AZ	-	TV05A110J-G	TVS	Vbr=12.2..13.5V, Vrwm=11.0V, Ipp=27.5A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5B	-	CH601H-70APT	Si-diode	SBD, 70V, 100mA, Vf<0.77V(10mA)	SOD-323	5d	1a	Chm
5B	-	FSS12SMB	Si-diode	SBR, 20V, 1A, Vf<0.5V(1A)	DO-214AA	1d	2j	Fag
5B	-	HZU5BLL	Zener diode	4.6..5.0V, Izt=0.5mA, Zzt=380Ω, 150mW	URP	5d	1a	Ren
5B	-	MA2X707	Si-diode	SBD, UHF-mix, 5V, 100mA, Vf<0.25V(2mA), 0.85pF	SOD-123	5d	1a	Pan
5B	-	MM1Z10	Zener diode	10V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Eic
5B	-	MM5Z6V8	Zener diode	6.4..7.2V, Zzt=15Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
5B	-	MMSZ10	Zener diode	10V±5%, Izt=5mA, Zzt=20Ω, 500mW	SOD-123	5d	1a	Eic
5B	-	S5B	Si-diode	Rectifier, 100V, 5A, Vf<1.15V(5A)	DO-214AB	1d	1k	Vs
5B	-	TCBZX584C6V8	Zener diode	6.4..7.2V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523FL	7d	1a	Tac
5B	-	TCMM5Z6V8	Zener diode	6.4..7.2V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523FL	7d	1a	Tac
5B1	-	RKZ5.1BKU	Zener diode	4.94..5.20V, Izt=20mA, Zzt=130Ω, 500mW	TURP-FM	7d	1a	Ren
5B6	-	RKZ5.6BKU	Zener diode	5.45..5.73V, Izt=20mA, Zzt=80Ω, 500mW	TURP-FM	7d	1a	Ren
5BD	-	SMA5J12	TVS	Vbr=13.3..16.3V, Vrwm=12V, 22.7A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BD	-	SMA5J12C	TVS	Vbr=13.3..16.3V, Vrwm=12V, 22.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BD	-	TV05A120K-G	TVS	Vbr=13.3..16.3V, Vrwm=12V, Ipp=22.7A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BDW	-	5.0SMDJ11C	TVS	Vbr=12.2..14.9V, Vrwm=11V, 251.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BDW	-	TV50C110KB-G	TVS	Vrwm=11.0V, Vbr=12.20..14.90V, Ipp=251.24A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BDX	-	5.0SMDJ11CA	TVS	Vbr=12.2..13.5V, Vrwm=11V, 277.5A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BDX	-	TV50C110JB-G	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=277.47A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BDY	-	5.0SMDJ12C	TVS	Vbr=13.3..16.3V, Vrwm=12V, 229.5A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BDY	-	TV50C120KB-G	TVS	Vrwm=12V, Vbr=13.30..16.30V, Ipp=229.55A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BDZ	-	5.0SMDJ12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, 253.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BDZ	-	TV50C120JB-G	TVS	Vrwm=12V, Vbr=13.30..14.70V, Ipp=253.77A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BE	-	5KASMC12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, Ipp=251.3A, 5000W (1ms)	DO-214AB	1d	1k	Vs
5BE	-	SMA5J12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, 25.1A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BE	-	SMA5J12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, 25.1A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BE	-	TV05A120J-G	TVS	Vbr=13.3..14.7V, Vrwm=12V, Ipp=25.1A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BED	-	5.0SMDJ13C	TVS	Vbr=14.4..17.6V, Vrwm=13V, 212.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BED	-	TV50C130KB-G	TVS	Vrwm=13.0V, Vbr=14.40..17.60V, Ipp=212.18A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BEE	-	5.0SMDJ13CA	TVS	Vbr=14.4..15.9V, Vrwm=13V, 234.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BEE	-	TV50C130JB-G	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=234.88A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BEF	-	5.0SMDJ14C	TVS	Vbr=15.6..19.1V, Vrwm=14V, 195.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BEF	-	TV50C140KB-G	TVS	Vrwm=14.0V, Vbr=15.60..19.10V, Ipp=195.74A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BEG	-	5.0SMDJ14CA	TVS	Vbr=15.6..17.2V, Vrwm=14V, 217.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BEG	-	TV50C140JB-G	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=217.67A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BEH	-	5.0SMDJ15C	TVS	Vbr=16.7..20.4V, Vrwm=15V, 187.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BEH	-	TV50C150KB-G	TVS	Vrwm=15.0V, Vbr=16.70..20.40V, Ipp=187.73A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5BEK	-	5.0SMDJ15CA	TVS	Vbr=16.7..18.5V, Vrwm=15V, 207.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BEK	-	TV50C150JB-G	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=206.97A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BEL	-	5.0SMDJ16C	TVS	Vbr=17.8..21.8V, Vrwm=16V, 175.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BEL	-	TV50C160KB-G	TVS	Vrwm=16.0V, Vbr=17.80..21.80V, Ipp=175.35A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BEM	-	5.0SMDJ16CA	TVS	Vbr=17.8..19.7V, Vrwm=16V, 194.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BEM	-	TV50C160JB-G	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=194.23A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BEN	-	5.0SMCJ11CA	TVS	Vrwm=11.0V, Vbr=12.2..13.5V, 275.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BEN	-	5.0SMDG11CA	TVS	Vrwm=11.0V, Vbr=12.2..13.5V, 275.0A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BEN	-	5.0SMDJ11CA	TVS	Vbr=12.2..13.5V, Vrwm=11V, 277.5A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BEN	-	5.0SMDJ17C	TVS	Vbr=18.9..23.1V, Vrwm=17V, 165.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BEN	-	5.0SMLJ11CA	TVS	Vrwm=11V, Vbr=12.2..13.5V, 275A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
5BEN	-	TV50C170KB-G	TVS	Vrwm=17.0V, Vbr=18.90..23.10V, Ipp=165.57A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BEP	-	5.0SMCJ12CA	TVS	Vrwm=12V, Vbr=13.3..14.7V, 252.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BEP	-	5.0SMDG12CA	TVS	Vrwm=12V, Vbr=13.3..14.7V, 252.0A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BEP	-	5.0SMDJ12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, 253.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BEP	-	5.0SMDJ12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, 253.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BEP	-	5.0SMDJ17CA	TVS	Vbr=18.9..20.9V, Vrwm=17V, 183.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BEP	-	5.0SMLJ12CA	TVS	Vrwm=12V, Vbr=13.3..14.7V, 252A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
5BEP	-	TV50C170JB-G	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=182.97A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BEQ	-	5.0SMCJ13CA	TVS	Vrwm=13.0V, Vbr=14.4..15.9V, 233.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BEQ	-	5.0SMDG13CA	TVS	Vrwm=13.0V, Vbr=14.4..15.9V, 233.0A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BEQ	-	5.0SMDJ13CA	TVS	Vbr=14.4..15.9V, Vrwm=13V, 234.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BEQ	-	5.0SMDJ13CA	TVS	Vbr=14.4..15.9V, Vrwm=13V, 234.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BEQ	-	5.0SMDJ18C	TVS	Vbr=20.0..24.4V, Vrwm=18V, 156.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BEQ	-	5.0SMLJ13CA	TVS	Vrwm=13V, Vbr=14.4..15.9V, 233A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
5BEQ	-	TV50C180KB-G	TVS	Vrwm=18.0V, Vbr=20.0..24.40V, Ipp=156.83A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BER	-	5.0SMCJ14CA	TVS	Vrwm=14.0V, Vbr=15.6..17.2V, 216.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BER	-	5.0SMDG14CA	TVS	Vrwm=14.0V, Vbr=15.6..17.2V, 216.0A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BER	-	5.0SMDJ14CA	TVS	Vbr=15.6..17.2V, Vrwm=14V, 217.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BER	-	5.0SMDJ14CA	TVS	Vbr=15.6..17.2V, Vrwm=14V, 217.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BER	-	5.0SMDJ18CA	TVS	Vbr=20.0..22.1V, Vrwm=18V, 172.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BER	-	5.0SMLJ14CA	TVS	Vrwm=14V, Vbr=15.6..17.2V, 216A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
5BER	-	TV50C180JB-G	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=172.95A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BES	-	5.0SMCJ15CA	TVS	Vrwm=15.0V, Vbr=16.7..18.5V, 205.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BES	-	5.0SMDG20CA	TVS	Vrwm=15.0V, Vbr=16.7..18.5V, 205.0A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BES	-	5.0SMDJ15CA	TVS	Vbr=16.7..18.5V, Vrwm=15V, 207.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BES	-	5.0SMDJ15CA	TVS	Vbr=16.7..18.5V, Vrwm=15V, 207.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BES	-	5.0SMDJ19C	TVS	Vbr=21.1..25.8V, Vrwm=19V, 148.5A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BES	-	5.0SMLJ15CA	TVS	Vrwm=15V, Vbr=16.7..18.5V, 205A, 5000W(1ms) Bidir.	DO-214AB	1ba	1j	Mco
5BES	-	5.0SMLJ20CA	TVS	Vrwm=15V, Vbr=16.7..18.5V, 205A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
5BES	-	TV50C190KB-G	TVS	Vrwm=19.0V, Vbr=21.13..25.76V, Ipp=148.49A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BET	-	5.0SMCJ16CA	TVS	Vrwm=16.0V, Vbr=17.8..19.7V, 193.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BET	-	5.0SMDG20CA	TVS	Vrwm=16.0V, Vbr=17.8..19.7V, 193.0A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BET	-	5.0SMDJ16CA	TVS	Vbr=17.8..19.7V, Vrwm=16V, 194.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BET	-	5.0SMDJ16CA	TVS	Vbr=17.8..19.7V, Vrwm=16V, 194.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BET	-	5.0SMDJ19CA	TVS	Vbr=21.1..23.3V, Vrwm=19V, 164.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BET	-	5.0SMLJ16CA	TVS	Vrwm=16V, Vbr=17.8..19.7V, 193A, 5000W(1ms) ,Bidir.	DO-214AB	1ba	1j	Mco
5BET	-	5.0SMLJ20CA	TVS	Vrwm=16V, Vbr=17.8..19.7V, 193A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
5BET	-	TV50C190JB-G	TVS	Vrwm=19.0V, Vbr=21.10..23.30V, Ipp=164.07A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BEU	-	5.0SMCJ17CA	TVS	Vrwm=17.0V, Vbr=18.9..20.9V, 181.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BEU	-	5.0SMDG20CA	TVS	Vrwm=17.0V, Vbr=18.9..20.9V, 181.0A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BEU	-	5.0SMDJ17CA	TVS	Vbr=18.9..20.9V, Vrwm=17V, 183.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BEU	-	5.0SMDJ17CA	TVS	Vbr=18.9..20.9V, Vrwm=17V, 183.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BEU	-	5.0SMDJ20C	TVS	Vbr=22.2..27.1V, Vrwm=20V, 141.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BEU	-	5.0SMLJ17CA	TVS	Vrwm=17V, Vbr=18.9..20.9V, 181A, 5000W(1ms) ,Bidir.	DO-214AB	1ba	1j	Mco
5BEU	-	5.0SMLJ20CA	TVS	Vrwm=17V, Vbr=18.9..20.9V, 181A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
5BEU	-	TV50C200KB-G	TVS	Vrwm=20.0V, Vbr=22.20..27.10V, Ipp=141.06A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BEV	-	5.0SMCJ18CA	TVS	Vrwm=18.0V, Vbr=20.0..22.1V, 172.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BEV	-	5.0SMDG20CA	TVS	Vrwm=18.0V, Vbr=20.0..22.1V, 172.0A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BEV	-	5.0SMDJ18CA	TVS	Vbr=20.0..22.1V, Vrwm=18V, 172.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BEV	-	5.0SMDJ18CA	TVS	Vbr=20.0..22.1V, Vrwm=18V, 172.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BEV	-	5.0SMDJ20CA	TVS	Vbr=22.2..24.5V, Vrwm=20V, 155.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BEV	-	5.0SMLJ18CA	TVS	Vrwm=18V, Vbr=20.0..22.1V, 172A, 5000W(1ms) ,Bidir.	DO-214AB	1ba	1j	Mco
5BEV	-	5.0SMLJ20CA	TVS	Vrwm=18V, Vbr=20.0..22.1V, 172A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
5BEV	-	TV50C200JB-G	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=155.86A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BEW	-	5.0SMCJ20CA	TVS	Vrwm=20.0V, Vbr=22.2..24.5V, 155.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BEW	-	5.0SMDG20CA	TVS	Vrwm=20.0V, Vbr=22.2..24.5V, 155.0A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BEW	-	5.0SMDJ20CA	TVS	Vbr=22.2..24.5V, Vrwm=20V, 155.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BEW	-	5.0SMDJ20CA	TVS	Vbr=22.2..24.5V, Vrwm=20V, 155.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BEW	-	5.0SMDJ22C	TVS	Vbr=24.4..29.8V, Vrwm=22V, 128.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5BEW	-	5.0SMLJ20CA	TVS	Vrwm=20V, Vbr=22.2..24.5V, 155A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
5BEW	-	TV50C220KB-G	TVS	Vrwm=22.0V, Vbr=24.40..29.80V, Ipp=128.17A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BEX	-	5.0SMCJ22CA	TVS	Vrwm=22.0V, Vbr=24.4..26.9V, 141.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BEX	-	5.0SMDG22CA	TVS	Vrwm=22.0V, Vbr=24.4..26.9V, 141.0A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BEX	-	5.0SMDJ22CA	TVS	Vbr=24.4..26.9V, Vrwm=22V, 141A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BEX	-	5.0SMDJ22CA	TVS	Vbr=24.4..26.9V, Vrwm=22V, 141A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BEX	-	5.0SMDJ22CA	TVS	Vbr=24.4..26.9V, Vrwm=22V, 141A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BEX	-	5.0SMLJ22CA	TVS	Vrwm=22V, Vbr=24.4..26.9V, 141A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
5BEX	-	TV50C220JB-G	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=142.25A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BEY	-	5.0SMDJ24C	TVS	Vbr=26.7..32.6V, Vrwm=24V, 117.4A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BEY	-	TV50C240KB-G	TVS	Vrwm=24.0V, Vbr=26.70..32.60V, Ipp=117.44A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BEZ	-	5.0SMCJ24CA	TVS	Vrwm=24.0V, Vbr=26.7..29.5V, 129.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BEZ	-	5.0SMDG24CA	TVS	Vrwm=24.0V, Vbr=26.7..29.5V, 129.0A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BEZ	-	5.0SMDJ24CA	TVS	Vbr=26.7..29.5V, Vrwm=24V, 129A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BEZ	-	5.0SMDJ24CA	TVS	Vbr=26.7..29.5V, Vrwm=24V, 129A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BEZ	-	5.0SMDJ24CA	TVS	Vbr=26.7..29.5V, Vrwm=24V, 129A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BEZ	-	5.0SMLJ24CA	TVS	Vrwm=24V, Vbr=26.7..29.5V, 129A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
5BEZ	-	TV50C240JB-G	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=129.82A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BF	-	SMA5J13	TVS	Vbr=14.4..17.6V, Vrwm=13V, 21.0A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BF	-	SMA5J13C	TVS	Vbr=14.4..17.6V, Vrwm=13V, 21.0A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BF	-	TV05A130K-G	TVS	Vbr=14.4..17.6V, Vrwm=13.0V, Ipp=21.0A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BFD	-	5.0SMDJ26C	TVS	Vbr=28.9..35.3V, Vrwm=26V, 108.4A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFD	-	TV50C260KB-G	TVS	Vrwm=26.0V, Vbr=28.90..35.30V, Ipp=108.37A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFE	-	5.0SMCJ26CA	TVS	Vrwm=26.0V, Vbr=28.9..31.9V, 119.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BFE	-	5.0SMDG26CA	TVS	Vrwm=26.0V, Vbr=28.9..31.9V, 119.0A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BFE	-	5.0SMDJ26CA	TVS	Vbr=28.9..31.9V, Vrwm=26V, 119A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFE	-	5.0SMDJ26CA	TVS	Vbr=28.9..31.9V, Vrwm=26V, 119A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BFE	-	5.0SMDJ26CA	TVS	Vbr=28.9..31.9V, Vrwm=26V, 119A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BFE	-	5.0SMLJ26CA	TVS	Vrwm=26V, Vbr=28.9..31.9V, 119A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
5BFE	-	TV50C260JB-G	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=119.95A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFF	-	5.0SMDJ28C	TVS	Vbr=31.1..38.0V, Vrwm=28V, 101.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFF	-	TV50C280KB-G	TVS	Vrwm=28.0V, Vbr=31.10..38.0V, Ipp=101.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFG	-	5.0SMCJ28CA	TVS	Vrwm=28.0V, Vbr=31.1..34.4V, 110.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BFG	-	5.0SMDG28CA	TVS	Vrwm=28.0V, Vbr=31.1..34.4V, 110.0A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BFG	-	5.0SMDJ28CA	TVS	Vbr=31.1..34.4V, Vrwm=28V, 110A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFG	-	5.0SMDJ28CA	TVS	Vbr=31.1..34.4V, Vrwm=28V, 110A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BFG	-	5.0SMDJ28CA	TVS	Vbr=31.1..34.4V, Vrwm=28V, 110A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BFG	-	5.0SMLJ28CA	TVS	Vrwm=28V, Vbr=31.1..34.4V, 110A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
5BFG	-	TV50C280JB-G	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=111.23A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFH	-	5.0SMDJ30C	TVS	Vbr=33.3..40.7V, Vrwm=30V, 94.4A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFH	-	TV50C300KB-G	TVS	Vrwm=30.0V, Vbr=33.30..40.70V, Ipp=94.39A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFK	-	5.0SMCJ30CA	TVS	Vrwm=30.0V, Vbr=33.3..36.8V, 103.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BFK	-	5.0SMDG30CA	TVS	Vrwm=30.0V, Vbr=33.3..36.8V, 103.0A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BFK	-	5.0SMDJ30CA	TVS	Vbr=33.3..36.8V, Vrwm=30V, 103A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BFK	-	5.0SMDJ30CA	TVS	Vbr=33.3..36.8V, Vrwm=30V, 103A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFK	-	5.0SMDJ30CA	TVS	Vbr=33.3..36.8V, Vrwm=30V, 103A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BFK	-	5.0SMLJ30CA	TVS	Vrwm=30V, Vbr=33.3..36.8V, 103A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
5BFK	-	TV50C300JB-G	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=104.34A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFL	-	5.0SMDJ33C	TVS	Vbr=36.7..44.9V, Vrwm=33V, 85.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFL	-	TV50C330KB-G	TVS	Vrwm=33.0V, Vbr=36.70..44.90V, Ipp=85.59A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFM	-	5.0SMCJ33CA	TVS	Vrwm=33.0V, Vbr=36.7..40.6V, 93.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BFM	-	5.0SMDG33CA	TVS	Vrwm=33.0V, Vbr=36.7..40.6V, 93.9A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BFM	-	5.0SMDJ33CA	TVS	Vbr=36.7..40.6V, Vrwm=33V, 93.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BFM	-	5.0SMDJ33CA	TVS	Vbr=36.7..40.6V, Vrwm=33V, 93.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFM	-	5.0SMDJ33CA	TVS	Vbr=36.7..40.6V, Vrwm=33V, 93.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BFM	-	5.0SMLJ33CA	TVS	Vrwm=33V, Vbr=36.7..40.6V, 93.9A, 5000W(1ms), Bidirecional	DO-214AB	1ba	1j	Mde
5BFM	-	TV50C330JB-G	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=94.75A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFN	-	5.0SMDJ36C	TVS	Vbr=40.0..48.9V, Vrwm=36V, 78.5A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFN	-	TV50C360KB-G	TVS	Vrwm=36.0V, Vbr=40.0..48.90V, Ipp=78.54A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFP	-	5.0SMCJ36CA	TVS	Vrwm=36.0V, Vbr=40.0..44.2V, 86.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BFP	-	5.0SMDG36CA	TVS	Vrwm=36.0V, Vbr=40.0..44.2V, 86.1A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BFP	-	5.0SMDJ36CA	TVS	Vbr=40.0..44.2V, Vrwm=36V, 86.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BFP	-	5.0SMDJ36CA	TVS	Vbr=40.0..44.2V, Vrwm=36V, 86.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFP	-	5.0SMDJ36CA	TVS	Vbr=40.0..44.2V, Vrwm=36V, 86.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BFP	-	5.0SMLJ36CA	TVS	Vrwm=36V, Vbr=40.0..44.2V, 86.1A, 5000W(1ms), Bidirecional	DO-214AB	1ba	1j	Mde
5BFP	-	TV50C360JB-G	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=86.92A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFQ	-	5.0SMDJ40C	TVS	Vbr=44.4..54.3V, Vrwm=40V, 70.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFQ	-	TV50C400KB-G	TVS	Vrwm=40.0V, Vbr=44.40..54.30V, Ipp=70.73A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFR	-	5.0SMCJ40CA	TVS	Vrwm=40.0V, Vbr=44.4..49.1V, 77.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BFR	-	5.0SMDG40CA	TVS	Vrwm=40.0V, Vbr=44.4..49.1V, 77.6A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5BFR	-	5.0SMDJ40CA	TVS	Vbr=44.4..49.1V, Vrwm=40V, 77.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BFR	-	5.0SMDJ40CA	TVS	Vbr=44.4..49.1V, Vrwm=40V, 77.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BFR	-	5.0SMDJ40CA	TVS	Vbr=44.4..49.1V, Vrwm=40V, 77.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFR	-	5.0SMLJ40CA	TVS	Vrwm=40V, Vbr=44.4..49.1V, 77.6A, 5000W(1ms), Bidirecional	DO-214AB	1ba	1j	Mde
5BFR	-	TV50C400JB-G	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=78.29A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFS	-	5.0SMDJ43C	TVS	Vbr=47.8..58.4V, Vrwm=43V, 65.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFS	-	TV50C430KB-G	TVS	Vrwm=43.0V, Vbr=47.80..58.40V, Ipp=65.84A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFT	-	5.0SMCJ43CA	TVS	Vrwm=43.0V, Vbr=47.8..52.8V, 72.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BFT	-	5.0SMDG43CA	TVS	Vrwm=43.0V, Vbr=47.8..52.8V, 72.1A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BFT	-	5.0SMDJ43CA	TVS	Vbr=47.8..52.8V, Vrwm=43V, 72.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BFT	-	5.0SMDJ43CA	TVS	Vbr=47.8..52.8V, Vrwm=43V, 72.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BFT	-	5.0SMDJ43CA	TVS	Vbr=47.8..52.8V, Vrwm=43V, 72.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFT	-	5.0SMLJ43CA	TVS	Vrwm=43V, Vbr=47.8..52.8V, 72.1A, 5000W(1ms), Bidirecional	DO-214AB	1ba	1j	Mde
5BFT	-	TV50C430JB-G	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=72.77A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFU	-	5.0SMDJ45C	TVS	Vbr=50.0..61.1V, Vrwm=45V, 62.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFU	-	TV50C450KB-G	TVS	Vrwm=45.0V, Vbr=50.0..61.10V, Ipp=62.89A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFV	-	5.0SMCJ45CA	TVS	Vrwm=45.0V, Vbr=50.0..55.3V, 68.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BFV	-	5.0SMDG45CA	TVS	Vrwm=45.0V, Vbr=50.0..55.3V, 68.8A, 5000W(1ms), Bidir.	DO-215AB	5ba	1a	Lge
5BFV	-	5.0SMDJ45CA	TVS	Vbr=50.0..55.3V, Vrwm=45V, 68.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFV	-	5.0SMDJ45CA	TVS	Vbr=50.0..55.3V, Vrwm=45V, 68.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
5BFV	-	5.0SMDJ45CA	TVS	Vbr=50.0..55.3V, Vrwm=45V, 68.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BFV	-	5.0SMLJ45CA	TVS	Vrwm=45V, Vbr=50.0..55.3V, 68.8A, 5000W(1ms), Bidirecional	DO-214AB	1ba	1j	Mde
5BFV	-	TV50C450JB-G	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=69.46A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFW	-	5.0SMDJ48C	TVS	Vbr=53.3..65.1V, Vrwm=48V, 59.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFW	-	TV50C480KB-G	TVS	Vrwm=48.0V, Vbr=53.30..65.10V, Ipp=59.06A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFX	-	5.0SMCJ48CA	TVS	Vrwm=48.0V, Vbr=53.3..58.9V, 64.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BFX	-	5.0SMDJ48CA	TVS	Vbr=53.3..58.9V, Vrwm=48V, 65.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFX	-	5.0SMDJ48CA	TVS	Vbr=53.3..58.9V, Vrwm=48V, 65.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BFX	-	TV50C480JB-G	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=65.25A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFY	-	5.0SMDJ51C	TVS	Vbr=56.7..69.3V, Vrwm=51V, 55.4A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFY	-	TV50C510KB-G	TVS	Vrwm=51.0V, Vbr=56.70..69.30V, Ipp=55.43A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BFZ	-	5.0SMCJ51CA	TVS	Vrwm=51.0V, Vbr=56.7..62.7V, 60.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BFZ	-	5.0SMDJ51CA	TVS	Vbr=56.7..62.7V, Vrwm=51V, 61.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BFZ	-	5.0SMDJ51CA	TVS	Vbr=56.7..62.7V, Vrwm=51V, 61.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BFZ	-	TV50C510JB-G	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=61.29A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BG	-	5KASMC13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, Ipp=232.6A, 5000W (1ms)	DO-214AB	1d	1k	Vs
5BG	-	SMA5J13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, 23.3A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BG	-	SMA5J13CA	TVS	Vbr=14.4..15.9V, Vrwm=13V, 23.3A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BG	-	TV05A130J-G	TVS	Vbr=14.4..15.9V, Vrwm=13.0V, Ipp=23.3A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BGA	-	5.0SMDJ80C	TVS	Vbr=89.0..109V, Vrwm=80V, 35.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGA	-	TV50C800KB-G	TVS	Vrwm=80.0V, Vbr=88.96..108.80V, Ipp=35.27A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGB	-	5.0SMDJ70CA	TVS	Vbr=77.8..86.0V, Vrwm=70V, 44.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BGB	-	5.0SMDJ80CA	TVS	Vbr=88.8..97.6V, Vrwm=80V, 39.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGB	-	TV50C800JB-G	TVS	Vrwm=80.0V, Vbr=88.80..97.60V, Ipp=38.97A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGD	-	5.0SMDJ54C	TVS	Vbr=60.0..73.3V, Vrwm=54V, 52.4A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGD	-	TV50C540KB-G	TVS	Vrwm=54.0V, Vbr=60.0..73.30V, Ipp=52.44A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGE	-	5.0SMCJ54CA	TVS	Vrwm=54.0V, Vbr=60.0..66.3V, 57.5A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BGE	-	5.0SMDJ54CA	TVS	Vbr=60.0..66.3V, Vrwm=54V, 58.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGE	-	5.0SMDJ54CA	TVS	Vbr=60.0..66.3V, Vrwm=54V, 58.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BGE	-	TV50C540JB-G	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=57.98A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGF	-	5.0SMDJ58C	TVS	Vbr=64.4..78.7V, Vrwm=58V, 49.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGF	-	TV50C580KB-G	TVS	Vrwm=58.0V, Vbr=64.40..78.70V, Ipp=49.03A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGG	-	5.0SMCJ58CA	TVS	Vrwm=58.0V, Vbr=64.4..71.2V, 53.5A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BGG	-	5.0SMDJ58CA	TVS	Vbr=64.4..71.2V, Vrwm=58V, 54.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BGG	-	5.0SMDJ58CA	TVS	Vbr=64.4..71.2V, Vrwm=58V, 54.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGG	-	TV50C580JB-G	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=53.95A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGH	-	5.0SMDJ60C	TVS	Vbr=66.7..81.5V, Vrwm=60V, 47.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGH	-	TV50C600KB-G	TVS	Vrwm=60.0V, Vbr=66.70..81.50V, Ipp=47.20A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGK	-	5.0SMCJ60CA	TVS	Vrwm=60.0V, Vbr=66.7..73.7V, 51.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BGK	-	5.0SMDJ60CA	TVS	Vbr=66.7..73.7V, Vrwm=60V, 52.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGK	-	5.0SMDJ60CA	TVS	Vbr=66.7..73.7V, Vrwm=60V, 52.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BGK	-	TV50C600JB-G	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=52.17A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGL	-	5.0SMDJ64C	TVS	Vbr=71.1..86.9V, Vrwm=64V, 44.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGL	-	TV50C640KB-G	TVS	Vrwm=64.0V, Vbr=71.10..86.90V, Ipp=44.30A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGM	-	5.0SMCJ64CA	TVS	Vrwm=64.0V, Vbr=71.1..78.6V, 48.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BGM	-	5.0SMDJ64CA	TVS	Vbr=71.1..78.6V, Vrwm=64V, 49.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGM	-	5.0SMDJ64CA	TVS	Vbr=71.1..78.6V, Vrwm=64V, 49.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BGM	-	TV50C640JB-G	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=49.03A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGN	-	5.0SMDJ70C	TVS	Vbr=77.8..95.1V, Vrwm=70V, 40.4A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGN	-	TV50C700KB-G	TVS	Vrwm=70.0V, Vbr=77.80..95.10V, Ipp=40.40A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5BGP	-	5.0SMCJ70CA	TVS	Vrwm=70.0V, Vbr=77.8..86.0V, 44.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BGP	-	5.0SMDJ70CA	TVS	Vbr=77.8..86.0V, Vrwm=70V, 44.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGP	-	TV50C700JB-G	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=44.69A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGQ	-	5.0SMDJ75C	TVS	Vbr=83.3..102V, Vrwm=75V, 37.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGQ	-	TV50C750KB-G	TVS	Vrwm=75.0V, Vbr=83.30..102.0V, Ipp=37.69A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGR	-	5.0SMCJ75CA	TVS	Vrwm=75.0V, Vbr=83.3..92.1V, 41.4A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BGR	-	5.0SMDJ75CA	TVS	Vbr=83.3..92.1V, Vrwm=75V, 41.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGR	-	5.0SMDJ75CA	TVS	Vbr=83.3..92.1V, Vrwm=75V, 41.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BGR	-	TV50C750JB-G	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=41.74A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGS	-	5.0SMDJ78C	TVS	Vbr=86.7..106V, Vrwm=78V, 36.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGS	-	TV50C780KB-G	TVS	Vrwm=78.0V, Vbr=86.70..106.0V, Ipp=36.33A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGT	-	5.0SMCJ78CA	TVS	Vrwm=78.0V, Vbr=86.7..95.8V, 39.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BGT	-	5.0SMDJ78CA	TVS	Vbr=86.7..95.8V, Vrwm=78V, 40.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGT	-	5.0SMDJ78CA	TVS	Vbr=86.7..95.8V, Vrwm=78V, 40.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BGT	-	TV50C780JB-G	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=40.08A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGU	-	5.0SMDJ85C	TVS	Vbr=94.4..115V, Vrwm=85V, 33.4A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGU	-	TV50C850KB-G	TVS	Vrwm=85.0V, Vbr=94.40..115.0V, Ipp=33.44A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGV	-	5.0SMCJ85CA	TVS	Vrwm=85.0V, Vbr=94.4..104V, 36.5A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BGV	-	5.0SMDJ85CA	TVS	Vbr=94.4..104V, Vrwm=85V, 36.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BGV	-	5.0SMDJ85CA	TVS	Vbr=94.4..104V, Vrwm=85V, 36.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGV	-	TV50C850JB-G	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=36.86A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGW	-	5.0SMDJ90C	TVS	Vbr=100..122V, Vrwm=90V, 31.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGW	-	TV50C900KB-G	TVS	Vrwm=90V, Vbr=100.0..122.0V, Ipp=31.56A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGX	-	5.0SMCJ90CA	TVS	Vrwm=90V, Vrwm=100..111V, 34.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BGX	-	5.0SMDJ90CA	TVS	Vbr=100..111V, Vrwm=90V, 34.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGX	-	5.0SMDJ90CA	TVS	Vbr=100..111V, Vrwm=90V, 34.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BGX	-	TV50C900JB-G	TVS	Vrwm=90V, Vbr=100.0..111.0V, Ipp=34.59A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGY	-	5.0SMDJ100C	TVS	Vbr=111..136V, Vrwm=100V, 28.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGY	-	TV50C101KB-G	TVS	Vrwm=100.0V, Vbr=111.0..136.0V, Ipp=28.21A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BGZ	-	5.0SMCJ100CA	TVS	Vrwm=100.0V, Vbr=111..123V, 30.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BGZ	-	5.0SMDJ100CA	TVS	Vbr=111..123V, Vrwm=100V, 31.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BGZ	-	5.0SMDJ100CA	TVS	Vbr=111..123V, Vrwm=100V, 31.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BGZ	-	TV50C101JB-G	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=31.17A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BH	-	SMA5J14	TVS	Vbr=15.6..19.1V, Vrwm=14V, 19.4A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BH	-	SMA5J14C	TVS	Vbr=15.6..19.1V, Vrwm=14V, 19.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BH	-	TV05A140K-G	TVS	Vbr=15.6..19.1V, Vrwm=14.0V, Ipp=19.4A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BHA	-	5.0SMDJ140C	TVS	Vbr=156..190V, Vrwm=140V, 20.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHA	-	TV50C141KB-G	TVS	Vrwm=140V, Vbr=155.68..190.40V, Ipp=20.15A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHB	-	5.0SMDJ140CA	TVS	Vbr=155..171V, Vrwm=140V, 22.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHB	-	5.0SMDJ160CA	TVS	Vbr=178..197V, Vrwm=160V, 19.5A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BHB	-	TV50C141JB-G	TVS	Vrwm=140V, Vbr=155.0..171.0V, Ipp=22.27A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHD	-	5.0SMDJ110C	TVS	Vbr=122..149V, Vrwm=110V, 25.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHD	-	TV50C111KB-G	TVS	Vrwm=110.0V, Vbr=122.0..149.0V, Ipp=25.77A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHE	-	5.0SMCJ110CA	TVS	Vrwm=110.0V, Vbr=122..135V, 28.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BHE	-	5.0SMDJ110CA	TVS	Vbr=122..135V, Vrwm=110V, 28.5A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHE	-	5.0SMDJ110CA	TVS	Vbr=122..135V, Vrwm=110V, 28.5A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BHE	-	TV50C111JB-G	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=28.53A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHF	-	5.0SMDJ120C	TVS	Vbr=133..163V, Vrwm=120V, 23.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHF	-	TV50C121KB-G	TVS	Vrwm=120.0V, Vbr=133.0..163.0V, Ipp=23.60A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHG	-	5.0SMCJ120CA	TVS	Vrwm=120.0V, Vbr=133..147V, 26.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BHG	-	5.0SMDJ120CA	TVS	Vbr=133..147V, Vrwm=120V, 26.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHG	-	5.0SMDJ120CA	TVS	Vbr=133..147V, Vrwm=120V, 26.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BHG	-	TV50C121JB-G	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=26.17A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHH	-	5.0SMDJ130C	TVS	Vbr=144..176V, Vrwm=130V, 21.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHH	-	TV50C131KB-G	TVS	Vrwm=130V, Vbr=144.0..176.0V, Ipp=21.86A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHK	-	5.0SMCJ130CA	TVS	Vrwm=130V, Vbr=144..159V, 24.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BHK	-	5.0SMDJ130CA	TVS	Vbr=144..159V, Vrwm=130V, 24.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BHK	-	5.0SMDJ130CA	TVS	Vbr=144..159V, Vrwm=130V, 24.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHK	-	TV50C131JB-G	TVS	Vrwm=130V, Vbr=144.0..159.0V, Ipp=24.16A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHL	-	5.0SMDJ150C	TVS	Vbr=167..204V, Vrwm=150V, 18.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHL	-	TV50C151KB-G	TVS	Vrwm=150.0V, Vbr=167.0..204.0V, Ipp=18.84A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHM	-	5.0SMCJ150CA	TVS	Vrwm=150.0V, Vbr=167..185V, 20.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BHM	-	5.0SMDJ150CA	TVS	Vbr=167..185V, Vrwm=150V, 20.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHM	-	5.0SMDJ150CA	TVS	Vbr=167..185V, Vrwm=150V, 20.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BHM	-	TV50C151JB-G	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=20.78A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHN	-	5.0SMDJ160C	TVS	Vbr=178..218V, Vrwm=160V, 17.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHN	-	TV50C161KB-G	TVS	Vrwm=160.0V, Vbr=178.0..218.0V, Ipp=17.60A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHP	-	5.0SMCJ160CA	TVS	Vrwm=160.0V, Vbr=178..197V, 19.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BHP	-	5.0SMDJ160CA	TVS	Vbr=178..197V, Vrwm=160V, 19.5A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHP	-	TV50C161JB-G	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=19.50A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5BHQ	-	5.0SMDJ170C	TVS	Vbr=189..231V, Vrwm=170V, 16.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHQ	-	TV50C171KB-G	TVS	Vrwm=170.0V, Vbr=189.0..231.0V, Ipp=16.61A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHR	-	5.0SMCJ170CA	TVS	Vrwm=170.0V, Vbr=189..209V, 18.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ext
5BHR	-	5.0SMDJ170CA	TVS	Vbr=189..209V, Vrwm=170V, 18.4A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHR	-	5.0SMDJ170CA	TVS	Vbr=189..209V, Vrwm=170V, 18.4A, 5000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
5BHR	-	TV50C171JB-G	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=18.36A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHS	-	5.0SMDJ180C	TVS	Vbr=200..245V, Vrwm=180V, 15.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHS	-	TV50C181KB-G	TVS	Vrwm=180.0V, Vbr=200.16..244.80V, Ipp=15.67A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHT	-	5.0SMDJ180CA	TVS	Vbr=200..220V, Vrwm=180V, 17.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHT	-	TV50C181JB-G	TVS	Vrwm=180.0V, Vbr=200.0..220.0V, Ipp=17.32A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHU	-	5.0SMDJ190C	TVS	Vbr=211..258V, Vrwm=190V, 14.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHU	-	TV50C191KB-G	TVS	Vrwm=190.0V, Vbr=211.28..258.40V, Ipp=14.85A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHV	-	5.0SMDJ190CA	TVS	Vbr=211..232V, Vrwm=190V, 16.4A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHV	-	TV50C191JB-G	TVS	Vrwm=190.0V, Vbr=211.0..232.0V, Ipp=16.41A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHW	-	5.0SMDJ200CA	TVS	Vbr=224..247V, Vrwm=200V, 9.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHW	-	TV50C201JB-G	TVS	Vrwm=200.0V, Vbr=224.0..247.0V, Ipp=9.26A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHX	-	5.0SMDJ220CA	TVS	Vbr=246 272V, Vrwm=220V8.4A, , 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHX	-	TV50C221JB-G	TVS	Vrwm=220.0V, Vbr=246.0..272.0V, Ipp=8.43A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BHZ	-	5.0SMDJ250CA	TVS	Vbr=279..309V, Vrwm=250V, 7.4A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BHZ	-	TV50C251JB-G	TVS	Vrwm=250.0V, Vbr=279.0..309.0V, Ipp=7.41A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BJE	-	5.0SMDJ300CA	TVS	Vbr=335..371V, Vrwm=300V, 6.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BJE	-	TV50C301JB-G	TVS	Vrwm=300.0V, Vbr=335.0..371.0V, Ipp=6.17A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BJG	-	5.0SMDJ350CA	TVS	Vbr=391..432V, Vrwm=350V, 5.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BJG	-	TV50C351JB-G	TVS	Vrwm=350.0V, Vbr=391.0..432.0V, Ipp=5.29A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BJK	-	5.0SMDJ400CA	TVS	Vbr=447..494V, Vrwm=400V, 4.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BJK	-	TV50C401JB-G	TVS	Vrwm=400.0V, Vbr=447.0..494.0V, Ipp=4.63A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BJM	-	5.0SMDJ440CA	TVS	Vbr=492..543V, Vrwm=440V, 4.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Pic
5BJM	-	TV50C441JB-G	TVS	Vrwm=440.0V, Vbr=492.0..543.0V, Ipp=4.21A, 5000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
5BK	-	SMA5J14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, 21.6A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BK	-	SMA5J14CA	TVS	Vbr=15.6..17.2V, Vrwm=14V, 21.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BK	-	TV05A140J-G	TVS	Vbr=15.6..17.2V, Vrwm=14.0V, Ipp=21.6A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BL	-	SMA5J15	TVS	Vbr=16.7..20.4V, Vrwm=15V, 18.6A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BL	-	SMA5J15C	TVS	Vbr=16.7..20.4V, Vrwm=15V, 18.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BL	-	TV05A150K-G	TVS	Vbr=16.7..20.4V, Vrwm=15.0V, Ipp=18.6A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BM	-	SMA5J15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, 20.5A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BM	-	SMA5J15CA	TVS	Vbr=16.7..18.5V, Vrwm=15V, 20.5A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BM	-	TV05A150J-G	TVS	Vbr=16.7..18.5V, Vrwm=15.0V, Ipp=20.5A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BN	-	SMA5J16C	TVS	Vbr=17.8..21.8V, Vrwm=16V, 17.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BN	-	TV05A160K-G	TVS	Vbr=17.8..21.8V, Vrwm=16.0V, Ipp=17.4A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BP	-	5KASMC16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, Ipp=192.3A, 5000W (1ms)	DO-214AB	1d	1k	Vs
5BP	-	SMA5J16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, 19.2A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BP	-	SMA5J16CA	TVS	Vbr=17.8..19.7V, Vrwm=16V, 19.2A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BP	-	TV05A160J-G	TVS	Vbr=17.8..19.7V, Vrwm=16.0V, Ipp=19.2A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BQ	-	SMA5J17	TVS	Vbr=18.9..23.1V, Vrwm=17V, 16.4A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BQ	-	SMA5J17C	TVS	Vbr=18.9..23.1V, Vrwm=17V, 16.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BQ	-	TV05A170K-G	TVS	Vbr=18.9..23.1V, Vrwm=17.0V, Ipp=16.4A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BR	-	5KASMC17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, Ipp=181.2A, 5000W (1ms)	DO-214AB	1d	1k	Vs
5BR	-	SMA5J17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, 18.1A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BR	-	SMA5J17CA	TVS	Vbr=18.9..20.9V, Vrwm=17V, 18.1A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BR	-	TV05A170J-G	TVS	Vbr=18.9..20.9V, Vrwm=17.0V, Ipp=18.1A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BS	-	SMA5J18	TVS	Vbr=20.0..24.4V, Vrwm=18V, 15.5A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BS	-	SMA5J18C	TVS	Vbr=20.0..24.4V, Vrwm=18V, 15.5A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BS	-	TV05A180K-G	TVS	Vbr=20.0..24.4V, Vrwm=18.0V, Ipp=15.5A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BT	-	5KASMC18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, Ipp=171.2A, 5000W (1ms)	DO-214AB	1d	1k	Vs
5BT	-	SMA5J18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, 17.1A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BT	-	SMA5J18CA	TVS	Vbr=20.0..22.1V, Vrwm=18V, 17.1A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BT	-	TV05A180J-G	TVS	Vbr=20.0..22.1V, Vrwm=18.0V, Ipp=17.1A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BU	-	SMA5J20	TVS	Vbr=22.2..27.1V, Vrwm=20V, 14.0A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BU	-	SMA5J20C	TVS	Vbr=22.2..27.1V, Vrwm=20V, 14.0A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BU	-	TV05A190K-G	TVS	Vbr=21.1..25.8V, Vrwm=19.0V, Ipp=14.7A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BV	-	5KASMC20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, Ipp=154.3A, 5000W (1ms)	DO-214AB	1d	1k	Vs
5BV	-	SMA5J20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, 15.4A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BV	-	SMA5J20CA	TVS	Vbr=22.2..24.5V, Vrwm=20V, 15.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BV	-	TV05A190J-G	TVS	Vbr=21.1..23.3V, Vrwm=19.0V, Ipp=16.2A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BW	-	SMA5J22	TVS	Vbr=24.4..29.8V, Vrwm=22V, 12.7A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BW	-	SMA5J22C	TVS	Vbr=24.4..29.8V, Vrwm=22V, 12.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BW	-	TV05A200K-G	TVS	Vbr=22.2..27.1V, Vrwm=20.0V, Ipp=14.0A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BX	-	5KASMC22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, Ipp=140.8A, 5000W (1ms)	DO-214AB	1d	1k	Vs
5BX	-	SMA5J22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, 14.1A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BX	-	SMA5J22CA	TVS	Vbr=24.4..26.9V, Vrwm=22V, 14.1A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5BX	-	TV05A200J-G	TVS	Vbr=22.2..24.5V, Vrwm=20.0V, Ipp=15.4A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BY	-	SMA5J24	TVS	Vbr=26.7..32.6V, Vrwm=24V, 11.6A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BY	-	SMA5J24C	TVS	Vbr=26.7..32.6V, Vrwm=24V, 11.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BY	-	TV05A220K-G	TVS	Vbr=24.4..29.8V, Vrwm=22.0V, Ipp=12.7A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5BZ	-	5KASMC24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, Ipp=128.5A, 5000W (1ms)	DO-214AB	1d	1k	Vs
5BZ	-	SMA5J24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, 12.9A, 500W(1ms)	DO-214AC	1d	1k	Vs
5BZ	-	SMA5J24CA	TVS	Vbr=26.7..29.5V, Vrwm=24V, 12.9A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5BZ	-	TV05A220J-G	TVS	Vbr=24.4..26.9V, Vrwm=22.0V, Ipp=14.1A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5C	-	BZT52C28WU	Zener diode	26.60..29.40V, Izt=5mA, Zzt=80Ω, 200mW	SOD-723	7d	1a	Ttr
5C	-	BZX784C28	Zener diode	26.60..29.40V, Zzt=80Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
5C	-	FSS14SMB	Si-diode	SBR, 40V, 1A, Vf<0.5V(1A)	DO-214AA	1d	2j	Fag
5C	-	GBLC05C	TVS	Vrwm=5V, 17A, 350W(1ms), 3pF, Bidir.	SOD-323	5ba	1e	Prt
5C	-	HZU5CLL	Zener diode	4.9..5.3V, Izt=0.5mA, Zzt=380Ω, 150mW	URP	5d	1a	Ren
5C	-	MM1Z11	Zener diode	11V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Eic
5C	-	MM5Z7V5	Zener diode	7.0..7.9V, Zzt=15Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
5C	-	MMSZ11	Zener diode	11V±5%, Izt=5mA, Zzt=20Ω, 500mW	SOD-123	5d	1a	Eic
5C	-	TCBZX584C7V5	Zener diode	7.0..7.9V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523FL	7d	1a	Tac
5C	-	TCMM5Z7V5	Zener diode	7.0..7.9V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523FL	7d	1a	Tac
5C	-	TVS225W24V0	TVS	Vrwm=24V, Vbr=26.7..29.5V, 50A, 225W(1ms)	DS-123	7d	1d	Did
5C1	-	RKZ5.1CKU	Zener diode	5.09..5.37V, Izt=20mA, Zzt=130Ω, 500mW	TURP-FM	7d	1a	Ren
5C1	-	STZ8270A	Zener diode	25.3..26.7V, Izt=2mA, Zzt=120Ω, 300mW	SOD-323	5d	1a	Jiy
5C6	-	RKZ5.6CKU	Zener diode	5.61..5.91V, Izt=20mA, Zzt=80Ω, 500mW	TURP-FM	7d	1a	Ren
5CD	-	SMA5J26	TVS	Vbr=28.9..35.3V, Vrwm=26V, 10.7A, 500W(1ms)	DO-214AC	1d	1k	Vs
5CD	-	SMA5J26C	TVS	Vbr=28.9..35.3V, Vrwm=26V, 10.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5CD	-	TV05A240K-G	TVS	Vbr=26.7..32.6V, Vrwm=24.0V, Ipp=11.6A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CE	-	5KASMC26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, Ipp=118.8A, 5000W (1ms)	DO-214AB	1d	1k	Vs
5CE	-	SMA5J26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, 11.9A, 500W(1ms)	DO-214AC	1d	1k	Vs
5CE	-	SMA5J26CA	TVS	Vbr=28.9..31.9V, Vrwm=26V, 11.9A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5CE	-	TV05A240J-G	TVS	Vbr=26.7..29.5V, Vrwm=24.0V, Ipp=12.9A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CF	-	SMA5J28	TVS	Vbr=31.1..38.0V, Vrwm=28V, 10.0A, 500W(1ms)	DO-214AC	1d	1k	Vs
5CF	-	SMA5J28C	TVS	Vbr=31.1..38.0V, Vrwm=28V, 10.0A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5CF	-	TV05A260K-G	TVS	Vbr=28.9..35.3V, Vrwm=26.0V, Ipp=10.7A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CG	-	5KASMC28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, Ipp=110.1A, 5000W (1ms)	DO-214AB	1d	1k	Vs
5CG	-	SMA5J28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, 11.0A, 500W(1ms)	DO-214AC	1d	1k	Vs
5CG	-	SMA5J28CA	TVS	Vbr=31.1..34.4V, Vrwm=28V, 11.0A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5CG	-	TV05A260J-G	TVS	Vbr=28.9..31.9V, Vrwm=26.0V, Ipp=11.9A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CH	-	SMA5J30	TVS	Vbr=33.3..40.7V, Vrwm=30V, 9.3A, 500W(1ms)	DO-214AC	1d	1k	Vs
5CH	-	SMA5J30C	TVS	Vbr=33.3..40.7V, Vrwm=30V, 9.3A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5CH	-	TV05A280K-G	TVS	Vbr=31.1..38.0V, Vrwm=28.0V, Ipp=10.0A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CK	-	5KASMC30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, Ipp=103.3A, 5000W (1ms)	DO-214AB	1d	1k	Vs
5CK	-	SMA5J30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, 10.3A, 500W(1ms)	DO-214AC	1d	1k	Vs
5CK	-	SMA5J30CA	TVS	Vbr=33.3..36.8V, Vrwm=30V, 10.3A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5CK	-	TV05A280J-G	TVS	Vbr=31.1..34.4V, Vrwm=28.0V, Ipp=11.0A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CL	-	SMA5J33	TVS	Vbr=36.7..44.9V, Vrwm=33V, 8.5A, 500W(1ms)	DO-214AC	1d	1k	Vs
5CL	-	SMA5J33C	TVS	Vbr=36.7..44.9V, Vrwm=33V, 8.5A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5CL	-	TV05A300K-G	TVS	Vbr=33.3..40.7V, Vrwm=30.0V, Ipp=9.35A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CM	-	5KASMC33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, Ipp=93.8A, 5000W (1ms)	DO-214AB	1d	1k	Vs
5CM	-	SMA5J33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, 9.4A, 500W(1ms)	DO-214AC	1d	1k	Vs
5CM	-	SMA5J33CA	TVS	Vbr=36.7..40.6V, Vrwm=33V, 9.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5CM	-	TV05A300J-G	TVS	Vbr=33.3..36.8V, Vrwm=30.0V, Ipp=10.3A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CN	-	SMA5J36	TVS	Vbr=40.0..48.9V, Vrwm=36V, 7.8A, 500W(1ms)	DO-214AC	1d	1k	Vs
5CN	-	SMA5J36C	TVS	Vbr=40.0..48.9V, Vrwm=36V, 7.8A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5CN	-	TV05A330K-G	TVS	Vbr=36.7..44.9V, Vrwm=33.0V, Ipp=8.47A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CP	-	5KASMC36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, Ipp=86.1A, 5000W (1ms)	DO-214AB	1d	1k	Vs
5CP	-	SMA5J36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, 8.6A, 500W(1ms)	DO-214AC	1d	1k	Vs
5CP	-	SMA5J36CA	TVS	Vbr=40.0..44.2V, Vrwm=36V, 8.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5CP	-	TV05A330J-G	TVS	Vbr=36.7..40.6V, Vrwm=33.0V, Ipp=9.38A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CQ	-	SMA5J40	TVS	Vbr=44.4..54.3V, Vrwm=40V, 7.0A, 500W(1ms)	DO-214AC	1d	1k	Vs
5CQ	-	SMA5J40C	TVS	Vbr=44.4..54.3V, Vrwm=40V, 7.0A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5CQ	-	TV05A360K-G	TVS	Vbr=40.0..48.9V, Vrwm=36.0V, Ipp=7.78A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CR	-	5KASMC40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, Ipp=77.5A, 5000W (1ms)	DO-214AB	1d	1k	Vs
5CR	-	SMA5J40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, 7.8A, 500W(1ms)	DO-214AC	1d	1k	Vs
5CR	-	SMA5J40CA	TVS	Vbr=44.4..49.1V, Vrwm=40V, 7.8A, 500W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
5CR	-	TV05A360J-G	TVS	Vbr=40.0..44.2V, Vrwm=36.0V, Ipp=8.61A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CS	-	TV05A400K-G	TVS	Vbr=44.4..54.3V, Vrwm=40.0V, Ipp=7.0A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CT	-	5KASMC43A	TVS	Vbr=47.8..52.8V, Vrwm=43V, Ipp=72.0A, 5000W (1ms)	DO-214AB	1d	1k	Vs
5CT	-	TV05A400J-G	TVS	Vbr=44.4..49.1V, Vrwm=40.0V, Ipp=7.75A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CU	-	TV05A430K-G	TVS	Vbr=47.8..58.4V, Vrwm=43.0V, Ipp=6.52A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CV	-	TV05A430J-G	TVS	Vbr=47.8..52.8V, Vrwm=43.0V, Ipp=7.20A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CW	-	TV05A450K-G	TVS	Vbr=50.0..61.1V, Vrwm=45.0V, Ipp=6.23A, 500W(1ms)	DO-214AC	1d	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5CX	-	TV05A450J-G	TVS	Vbr=50.0..55.3V, Vrwm=45.0V, Ipp=6.88A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CY	-	TV05A480K-G	TVS	Vbr=53.3..65.1V, Vrwm=48.0V, Ipp=5.85A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5CZ	-	TV05A480J-G	TVS	Vbr=53.3..58.9V, Vrwm=48.0V, Ipp=6.46A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5D	-	1SS355PT	Si-diode	Sw, 90V, 100mA, Vf<1.2V(100mA), 4ns	SOD-323	5d	1a	Chm
5D	-	FSS19SMB	Si-diode	SBR, 90V, 1A, Vf<0.85V(1A)	DO-214AA	1d	2j	Fag
5D	-	MM1Z12	Zener diode	12V±5%, Izt=5mA, Zzt=35Ω, 500mW	SOD-123FL	7d	1a	Eic
5D	-	MM5Z8V2	Zener diode	7.7..8.7V, Zzt=15Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
5D	-	MMDL914	Si-diode	Sw, 100V, 200mA, 200mW, Vf<1V(10mA), <4ns	SOD-323	5d	1a	Ons
5D	-	MMSD914	Si-diode	Sw, 100V, 200mA, 225mW, Vf<1V(10mA), <4ns	SOD-123	5d	1a	Ons
5D	-	MMSZ12	Zener diode	12V±5%, Izt=5mA, Zzt=25Ω, 500mW	SOD-123	5d	1a	Eic
5D	-	S5D	Si-diode	Rectifier, 200V, 5A, Vf<1.15V(5A)	DO-214AB	1d	1k	Vs
5D	-	TCBZX584C8V2	Zener diode	7.7..8.7V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523FL	7d	1a	Tac
5D	-	TCMM5Z8V2	Zener diode	7.7..8.7V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523FL	7d	1a	Tac
5D	-	WOSD05	TVS	Vbr=6V, Vcl=9.8..14.5V, Ipp=24A, 300W(1ms)	SOD-323	5d	1e	Wtr
5DJ100A	-	5.0SMDJ100A	TVS	Vbr=111..123V, Vrwm=100V, 30.9A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ100CA	-	5.0SMDJ100CA	TVS	Vbr=111..123V, Vrwm=100V, 31.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ110A	-	5.0SMDJ110A	TVS	Vbr=122..135V, Vrwm=110V, 28.3A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ110CA	-	5.0SMDJ110CA	TVS	Vbr=122..135V, Vrwm=110V, 28.5A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ11A	-	5.0SMDJ11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, 277.5A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ11CA	-	5.0SMDJ11CA	TVS	Vbr=12.2..13.5V, Vrwm=11V, 277.5A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ120A	-	5.0SMDJ120A	TVS	Vbr=133..147V, Vrwm=120V, 26.0A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ120CA	-	5.0SMDJ120CA	TVS	Vbr=133..147V, Vrwm=120V, 26.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ12A	-	5.0SMDJ12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, 253.8A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ12CA	-	5.0SMDJ12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, 253.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ130A	-	5.0SMDJ130A	TVS	Vbr=144..159V, Vrwm=130V, 24.0A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ130CA	-	5.0SMDJ130CA	TVS	Vbr=144..159V, Vrwm=130V, 24.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ13A	-	5.0SMDJ13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, 234.9A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ13CA	-	5.0SMDJ13CA	TVS	Vbr=14.4..15.9V, Vrwm=13V, 234.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ140A	-	5.0SMDJ140A	TVS	Vbr=155..171V, Vrwm=140V, 22.3A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ140CA	-	5.0SMDJ140CA	TVS	Vbr=155..171V, Vrwm=140V, 22.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ14A	-	5.0SMDJ14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, 217.7A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ14CA	-	5.0SMDJ14CA	TVS	Vbr=15.6..17.2V, Vrwm=14V, 217.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ150A	-	5.0SMDJ150A	TVS	Vbr=167..185V, Vrwm=150V, 20.6A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ150CA	-	5.0SMDJ150CA	TVS	Vbr=167..185V, Vrwm=150V, 20.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ15A	-	5.0SMDJ15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, 207.0A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ15CA	-	5.0SMDJ15CA	TVS	Vbr=16.7..18.5V, Vrwm=15V, 207.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ160A	-	5.0SMDJ160A	TVS	Vbr=178..197V, Vrwm=160V, 19.3A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ160CA	-	5.0SMDJ160CA	TVS	Vbr=178..197V, Vrwm=160V, 19.5A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ16A	-	5.0SMDJ16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, 194.2A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ16CA	-	5.0SMDJ16CA	TVS	Vbr=17.8..19.7V, Vrwm=16V, 194.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ170A	-	5.0SMDJ170A	TVS	Vbr=189..209V, Vrwm=170V, 18.2A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ170CA	-	5.0SMDJ170CA	TVS	Vbr=189..209V, Vrwm=170V, 18.4A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ17A	-	5.0SMDJ17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, 183.0A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ17CA	-	5.0SMDJ17CA	TVS	Vbr=18.9..20.9V, Vrwm=17V, 183.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ180A	-	5.0SMDJ180A	TVS	Vbr=200..220V, Vrwm=180V, 17.3A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ180CA	-	5.0SMDJ180CA	TVS	Vbr=200..220V, Vrwm=180V, 17.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ18A	-	5.0SMDJ18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, 172.9A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ18CA	-	5.0SMDJ18CA	TVS	Vbr=20.0..22.1V, Vrwm=18V, 172.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ190A	-	5.0SMDJ190A	TVS	Vbr=211..232V, Vrwm=190V, 16.4A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ190CA	-	5.0SMDJ190CA	TVS	Vbr=211..232V, Vrwm=190V, 16.4A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ19A	-	5.0SMDJ19A	TVS	Vbr=21.1..23.3V, Vrwm=19V, 164.1A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ19CA	-	5.0SMDJ19CA	TVS	Vbr=21.1..23.3V, Vrwm=19V, 164.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ20A	-	5.0SMDJ20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, 155.9A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ20CA	-	5.0SMDJ20CA	TVS	Vbr=22.2..24.5V, Vrwm=20V, 155.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ22A	-	5.0SMDJ22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, 141A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ22CA	-	5.0SMDJ22CA	TVS	Vbr=24.4..26.9V, Vrwm=22V, 141A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ24A	-	5.0SMDJ24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, 129A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ24CA	-	5.0SMDJ24CA	TVS	Vbr=26.7..29.5V, Vrwm=24V, 129A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ26A	-	5.0SMDJ26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, 119A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ26CA	-	5.0SMDJ26CA	TVS	Vbr=28.9..31.9V, Vrwm=26V, 119A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ28A	-	5.0SMDJ28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, 110A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ28CA	-	5.0SMDJ28CA	TVS	Vbr=31.1..34.4V, Vrwm=28V, 110A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ30A	-	5.0SMDJ30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, 103A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ30CA	-	5.0SMDJ30CA	TVS	Vbr=33.3..36.8V, Vrwm=30V, 103A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ33A	-	5.0SMDJ33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, 93.9A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ33CA	-	5.0SMDJ33CA	TVS	Vbr=36.7..40.6V, Vrwm=33V, 93.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ36A	-	5.0SMDJ36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, 86.1A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ36CA	-	5.0SMDJ36CA	TVS	Vbr=40.0..44.2V, Vrwm=36V, 86.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ40A	-	5.0SMDJ40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, 77.6A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ40CA	-	5.0SMDJ40CA	TVS	Vbr=44.4..49.1V, Vrwm=40V, 77.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5DJ43A	-	5.0SMDJ43A	TVS	Vbr=47.8..52.8V, Vrwm=43V, 72.1A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ43CA	-	5.0SMDJ43CA	TVS	Vbr=47.8..52.8V, Vrwm=43V, 72.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ45A	-	5.0SMDJ45A	TVS	Vbr=50.0..55.3V, Vrwm=45V, 68.8A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ45CA	-	5.0SMDJ45CA	TVS	Vbr=50.0..55.3V, Vrwm=45V, 68.8A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ48A	-	5.0SMDJ48A	TVS	Vbr=53.3..58.9V, Vrwm=48V, 64.7A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ48CA	-	5.0SMDJ48CA	TVS	Vbr=53.3..58.9V, Vrwm=48V, 65.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ51A	-	5.0SMDJ51A	TVS	Vbr=56.7..62.7V, Vrwm=51V, 60.7A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ51CA	-	5.0SMDJ51CA	TVS	Vbr=56.7..62.7V, Vrwm=51V, 61.3A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ54A	-	5.0SMDJ54A	TVS	Vbr=60.0..66.3V, Vrwm=54V, 57.5A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ54CA	-	5.0SMDJ54CA	TVS	Vbr=60.0..66.3V, Vrwm=54V, 58.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ58A	-	5.0SMDJ58A	TVS	Vbr=64.4..71.2V, Vrwm=58V, 53.5A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ58CA	-	5.0SMDJ58CA	TVS	Vbr=64.4..71.2V, Vrwm=58V, 54.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ60A	-	5.0SMDJ60A	TVS	Vbr=66.7..73.7V, Vrwm=60V, 51.7A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ60CA	-	5.0SMDJ60CA	TVS	Vbr=66.7..73.7V, Vrwm=60V, 52.2A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ64A	-	5.0SMDJ64A	TVS	Vbr=71.1..78.6V, Vrwm=64V, 48.6A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ64CA	-	5.0SMDJ64CA	TVS	Vbr=71.1..78.6V, Vrwm=64V, 49.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ70A	-	5.0SMDJ70A	TVS	Vbr=77.8..86V, Vrwm=70V, 44.3A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ70CA	-	5.0SMDJ70CA	TVS	Vbr=77.8..86.0V, Vrwm=70V, 44.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ75A	-	5.0SMDJ75A	TVS	Vbr=83.3..92.1V, Vrwm=75V, 41.4A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ75CA	-	5.0SMDJ75CA	TVS	Vbr=83.3..92.1V, Vrwm=75V, 41.7A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ78A	-	5.0SMDJ78A	TVS	Vbr=86.7..95.8V, Vrwm=78V, 39.7A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ78CA	-	5.0SMDJ78CA	TVS	Vbr=86.7..95.8V, Vrwm=78V, 40.1A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ80A	-	5.0SMDJ80A	TVS	Vbr=88.8..97.6V, Vrwm=80V, 39.0A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ80CA	-	5.0SMDJ80CA	TVS	Vbr=88.8..97.6V, Vrwm=80V, 39.0A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ85A	-	5.0SMDJ85A	TVS	Vbr=94.4..104V, Vrwm=85V, 36.5A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ85CA	-	5.0SMDJ85CA	TVS	Vbr=94.4..104V, Vrwm=85V, 36.9A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5DJ90A	-	5.0SMDJ90A	TVS	Vbr=100..111V, Vrwm=90V, 34.3A, 5000W(1ms)	DO-214AB	1d	1a	Ers
5DJ90CA	-	5.0SMDJ90CA	TVS	Vbr=100..111V, Vrwm=90V, 34.6A, 5000W(1ms), Bidir.	DO-214AB	1ba	1j	Ers
5E	-	FSS110SMB	Si-diode	SBR, 110V, 1A, Vf<0.85V(1A)	DO-214AA	1d	2j	Fag
5E	-	MM1Z13	Zener diode	13V±5%, Izt=5mA, Zzt=35Ω, 500mW	SOD-123FL	7d	1a	Eic
5E	-	MM5Z9V1	Zener diode	8.5..9.6V, Zzt=15Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
5E	-	MMSZ13	Zener diode	13V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Eic
5E	-	RB751V40	Si-diode	Schottky, Hi-Speed, 40V, 20mA, 200mW, Vf<026V1mA)	SOD-323	5d	1a	Ons
5E	-	TCBZX584C9V1	Zener diode	8.5..9.6V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523FL	7d	1a	Tac
5E	-	TCMM5Z9V1	Zener diode	8.5..9.6V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523FL	7d	1a	Tac
5E1	-	STZ8270C	Zener diode	27.3..28.7V, Izt=2mA, Zzt=120Ω, 300mW	SOD-323	5d	1a	Jiy
5F	-	CDZ55C5V6T	Zener diode	5.32..5.88V, Zzt=30Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
5F	-	FSS150SMB	Si-diode	SBR, 150V, 1A, Vf<0.95V(1A)	DO-214AA	1d	2j	Fag
5F	-	KDZ4.7FV	Zener diode	4.40..4.90V, Izt=5mA, Zzt=120Ω, 100mW	TFSC	7d	1a	Kec
5F	-	MAZD036	Zener diode	3.4..3.8V, Zzt=130Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
5F	-	MM1Z15	Zener diode	15V±5%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123FL	7d	1a	Eic
5F	-	MM5Z10V	Zener diode	9.4..10.6V, Zzt=20Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
5F	-	MMSZ15	Zener diode	15V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Eic
5F	-	TCBZX584C10V	Zener diode	9.4..10.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523FL	7d	1a	Tac
5F	-	TCMM5Z10V	Zener diode	9.4..10.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523FL	7d	1a	Tac
5G	-	MM5Z11V	Zener diode	10.4..11.6V, Zzt=20Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
5G	-	S5G	Si-diode	Rectifier, 400V, 5A, Vf<1.15V(5A)	DO-214AB	1d	1k	Vs
5G	-	TCBZX584C11V	Zener diode	10.4..11.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523FL	7d	1a	Tac
5G	-	TCMM5Z11V	Zener diode	10.4..11.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523FL	7d	1a	Tac
5G1	-	STZ8300A	Zener diode	28.3..29.7V, Izt=2mA, Zzt=160Ω, 300mW	SOD-323	5d	1a	Jiy
5H	-	MM1Z16	Zener diode	16V±5%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123FL	7d	1a	Eic
5H	-	MM5Z12V	Zener diode	11.4..12.7V, Zzt=25Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
5H	-	MMDL770	Si-diode	UHF/VHF Det, Schottky Barrier, 70V, 200mW, <1pF	SOD-323	5d	1a	Ons
5H	-	MMSZ16	Zener diode	16V±5%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1a	Eic
5H	-	TCBZX584C12V	Zener diode	11.4..12.7V, Izt=5mA, Zzt=25Ω, 200mW	SOD-523FL	7d	1a	Tac
5H	-	TCMM5Z12V	Zener diode	11.4..12.7V, Izt=5mA, Zzt=25Ω, 200mW	SOD-523FL	7d	1a	Tac
5I	-	MMSD4148	Si-diode	Sw, 200V, 200mA, 225mW, Vf<1V(10mA), <4ns	SOD-123	5d	1a	Ons
5J	-	MM1Z18	Zener diode	18V±5%, Izt=5mA, Zzt=45Ω, 500mW	SOD-123FL	7d	1a	Eic
5J	-	MM5Z13V	Zener diode	12.4..14.1V, Zzt=30Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
5J	-	MMSZ18	Zener diode	18V±5%, Izt=5mA, Zzt=45Ω, 500mW	SOD-123	5d	1a	Eic
5J	-	S5J	Si-diode	Rectifier, 600V, 5A, Vf<1.15V(5A)	DO-214AB	1d	1k	Vs
5J	-	TCBZX584C13V	Zener diode	12.4..14.1V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523FL	7d	1a	Tac
5J	-	TCMM5Z13V	Zener diode	12.4..14.1V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523FL	7d	1a	Tac
5J1	-	STZ8300C	Zener diode	30.2..31.8V, Izt=2mA, Zzt=160Ω, 300mW	SOD-323	5d	1a	Jiy
5K	-	MM1Z20	Zener diode	20V±5%, Izt=5mA, Zzt=50Ω, 500mW	SOD-123FL	7d	1a	Eic
5K	-	MM5Z15V	Zener diode	14.3..15.8V, Zzt=30Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
5K	-	MMSZ20	Zener diode	20V±5%, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1a	Eic
5K	-	MMVL809	C-diode	VHF-tuning, 20V, 20mA, 200mW, 4.5/6.1pF(2V, 1MHz)	SOD-323	5d	1a	Ons
5K	-	S5K	Si-diode	Rectifier, 800V, 5A, Vf<1.15V(5A)	DO-214AB	1d	1k	Vs
5K	-	TCBZX584C15V	Zener diode	14.3..15.8V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523FL	7d	1a	Tac

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5K	-	TCMM5Z15V	Zener diode	14.3..15.8V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523FL	7d	1a	Tac
5L	-	MM5Z16V	Zener diode	15.3..17.1V, Zzt=40Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
5L	-	TCBZX584C16V	Zener diode	15.3..17.1V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523FL	7d	1a	Tac
5L	-	TCMM5Z16V	Zener diode	15.3..17.1V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523FL	7d	1a	Tac
5L1	-	STZ8330A	Zener diode	31.2..32.8V, Izt=2mA, Zzt=200Ω, 300mW	SOD-323	5d	1a	Jiy
5M	-	MM1Z22	Zener diode	22V±5%, Izt=5mA, Zzt=55Ω, 500mW	SOD-123FL	7d	1a	Eic
5M	-	MM5Z18V	Zener diode	16.8..19.1V, Zzt=45Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
5M	-	MMSZ22	Zener diode	22V±5%, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1a	Eic
5M	-	S5M	Si-diode	Rectifier, 1000V, 5A, Vf<1.15V(5A)	DO-214AB	1d	1k	Vs
5M	-	TCBZX584C18V	Zener diode	16.8..19.1V, Izt=5mA, Zzt=45Ω, 200mW	SOD-523FL	7d	1a	Tac
5M	-	TCMM5Z18V	Zener diode	16.8..19.1V, Izt=5mA, Zzt=45Ω, 200mW	SOD-523FL	7d	1a	Tac
5MS	-	S5MS	Si-diode	Rectifier, 1000V, 5A, Vf<1/15V(5A)	DO-214AB	1d	1k	Vs
5N	-	MM1Z24	Zener diode	24V±5%, Izt=5mA, Zzt=60Ω, 500mW	SOD-123FL	7d	1a	Eic
5N	-	MM5Z20V	Zener diode	18.8..21.2V, Zzt=55Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
5N	-	MMSZ24	Zener diode	24V±5%, Izt=5mA, Zzt=70Ω, 500mW	SOD-123	5d	1a	Eic
5N	-	TCBZX584C20V	Zener diode	18.8..21.2V, Izt=5mA, Zzt=55Ω, 200mW	SOD-523FL	7d	1a	Tac
5N	-	TCMM5Z20V	Zener diode	18.8..21.2V, Izt=5mA, Zzt=55Ω, 200mW	SOD-523FL	7d	1a	Tac
5N1	-	STZ8330C	Zener diode	33.2..34.9V, Izt=2mA, Zzt=200Ω, 300mW	SOD-323	5d	1a	Jiy
5P	-	CMDZ27L	Zener diode	25.10..28.90V, Izt=0.5mA, Zzt=150Ω, 250mW	SOD-323	5d	1a	Cen
5P	-	KDZ4.7FVY	Zener diode	4.55..4.75V, Izt=5mA, Zzt=120Ω, 100mW	TFSC	7d	1a	Kec
5P	-	MM1Z27	Zener diode	27V±5%, Izt=5mA, Zzt=70Ω, 500mW	SOD-123FL	7d	1a	Eic
5P	-	MM5Z22V	Zener diode	20.8..23.3V, Zzt=55Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
5P	-	TCBZX584C22V	Zener diode	20.8..23.3V, Izt=5mA, Zzt=55Ω, 200mW	SOD-523FL	7d	1a	Tac
5P	-	TCMM5Z22V	Zener diode	20.8..23.3V, Izt=5mA, Zzt=55Ω, 200mW	SOD-523FL	7d	1a	Tac
5P1	-	SML4733	Zener diode	5.1V±5%, Izt=49mA, Zzt=7Ω, 1W	DO-214AC	1d	1k	Vs
5P6	-	SML4734	Zener diode	5.6V±5%, Izt=45mA, Zzt=5Ω, 1W	DO-214AC	1d	1k	Vs
5PDW	-	5.0SMDJ11	TVS	Vbr=12.2..14.9V, Vrwm=11V, 251.2A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PDW	-	TV50C110K-G	TVS	Vrwm=11.0V, Vbr=12.20..14.90V, Ipp=251.24A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PDX	-	5.0SMDJ11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, 277.5A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PDX	-	TV50C110J-G	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=277.47A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PDY	-	5.0SMDJ12	TVS	Vbr=13.3..16.3V, Vrwm=12V, 229.5A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PDY	-	TV50C120K-G	TVS	Vrwm=12V, Vbr=13.30..16.30V, Ipp=229.55A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PDZ	-	5.0SMDJ12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, 253.8A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PDZ	-	TV50C120J-G	TVS	Vrwm=12V, Vbr=13.30..14.70V, Ipp=253.77A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PED	-	5.0SMDJ13	TVS	Vbr=14.4..17.6V, Vrwm=13V, 212.2A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PED	-	TV50C130K-G	TVS	Vrwm=13.0V, Vbr=14.40..17.60V, Ipp=212.18A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PEE	-	5.0SMDJ13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, 234.9A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PEE	-	TV50C130J-G	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=234.88A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PEF	-	5.0SMDJ14	TVS	Vbr=15.6..19.1V, Vrwm=14V, 195.7A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PEF	-	TV50C140K-G	TVS	Vrwm=14.0V, Vbr=15.60..19.10V, Ipp=195.74A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PEG	-	5.0SMDJ14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, 217.7A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PEG	-	TV50C140J-G	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=217.67A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PEH	-	5.0SMDJ15	TVS	Vbr=16.7..20.4V, Vrwm=15V, 187.7A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PEH	-	TV50C150K-G	TVS	Vrwm=15.0V, Vbr=16.70..20.40V, Ipp=187.73A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PEK	-	5.0SMDJ15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, 207.0A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PEK	-	TV50C150J-G	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=206.97A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PEL	-	5.0SMDJ16	TVS	Vbr=17.8..21.8V, Vrwm=16V, 175.3A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PEL	-	TV50C160K-G	TVS	Vrwm=16.0V, Vbr=17.80..21.80V, Ipp=175.35A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PEM	-	5.0SMDJ16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, 194.2A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PEM	-	TV50C160J-G	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=194.23A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PEN	-	5.0SMCJ11A	TVS	Vrwm=11.0V, Vbr=12.2..13.5V, 275.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PEN	-	5.0SMDG11A	TVS	Vrwm=11.0V, Vbr=12.2..13.5V, 275.0A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PEN	-	5.0SMDJ11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, 277.5A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PEN	-	5.0SMDJ17	TVS	Vbr=18.9..23.1V, Vrwm=17V, 165.6A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PEN	-	5.0SMLJ11A	TVS	Vrwm=11V, Vbr=12.2..13.5V, 275A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PEN	-	TV50C170K-G	TVS	Vrwm=17.0V, Vbr=18.90..23.10V, Ipp=165.57A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PEP	-	5.0SMCJ12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, 252.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PEP	-	5.0SMDG12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, 252.0A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PEP	-	5.0SMDJ12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, 253.8A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PEP	-	5.0SMDJ12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, 253.8A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PEP	-	5.0SMDJ17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, 183.0A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PEP	-	5.0SMLJ12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, 252A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PEP	-	TV50C170J-G	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=182.97A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PEQ	-	5.0SMCJ13A	TVS	Vrwm=13.0V, Vbr=14.4..15.9V, 233.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PEQ	-	5.0SMDG13A	TVS	Vrwm=13.0V, Vbr=14.4..15.9V, 233.0A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PEQ	-	5.0SMDJ13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, 234.9A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PEQ	-	5.0SMDJ13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, 234.9A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PEQ	-	5.0SMDJ18	TVS	Vbr=20.0..24.4V, Vrwm=18V, 156.8A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PEQ	-	5.0SMLJ13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, 233A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PEQ	-	TV50C180K-G	TVS	Vrwm=18.0V, Vbr=20.0..24.40V, Ipp=156.83A, 5000W(1ms)	DO-214AB	1d	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5PER	-	5.0SMCJ14A	TVS	Vrwm=14.0V, Vbr=15.6..17.2V, 216.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PER	-	5.0SMDG14A	TVS	Vrwm=14.0V, Vbr=15.6..17.2V, 216.0A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PER	-	5.0SMDJ14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, 217.7A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PER	-	5.0SMDJ14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, 217.7A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PER	-	5.0SMDJ18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, 172.9A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PER	-	5.0SMLJ14A	TVS	Vrwm=14V, Vbr=15.6..17.2V, 216A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PER	-	TV50C180J-G	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=172.95A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PES	-	5.0SMCJ15A	TVS	Vrwm=15.0V, Vbr=16.7..18.5V, 205.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PES	-	5.0SMDG15A	TVS	Vrwm=15.0V, Vbr=16.7..18.5V, 205.0A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PES	-	5.0SMDJ15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, 207.0A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PES	-	5.0SMDJ15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, 207.0A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PES	-	5.0SMDJ19	TVS	Vbr=21.1..25.8V, Vrwm=19V, 148.5A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PES	-	5.0SMLJ15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, 205A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PES	-	TV50C190K-G	TVS	Vrwm=19.0V, Vbr=21.13..25.76V, Ipp=148.49A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PET	-	5.0SMCJ16A	TVS	Vrwm=16.0V, Vbr=17.8..19.7V, 193.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PET	-	5.0SMDG16A	TVS	Vrwm=16.0V, Vbr=17.8..19.7V, 193.0A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PET	-	5.0SMDJ16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, 194.2A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PET	-	5.0SMDJ16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, 194.2A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PET	-	5.0SMDJ19A	TVS	Vbr=21.1..23.3V, Vrwm=19V, 164.1A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PET	-	5.0SMLJ16A	TVS	Vrwm=16V, Vbr=17.8..19.7V, 193A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PET	-	TV50C190J-G	TVS	Vrwm=19.0V, Vbr=21.10..23.30V, Ipp=164.07A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PEU	-	5.0SMCJ17A	TVS	Vrwm=17.0V, Vbr=18.9..20.9V, 181.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PEU	-	5.0SMDG17A	TVS	Vrwm=17.0V, Vbr=18.9..20.9V, 181.0A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PEU	-	5.0SMDJ17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, 183.0A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PEU	-	5.0SMDJ17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, 183.0A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PEU	-	5.0SMDJ20	TVS	Vbr=22.2..27.1V, Vrwm=20V, 141.1A, 5000W(1ms)	DO-214AB	1d	1j	Pic
5PEU	-	5.0SMLJ17A	TVS	Vrwm=17V, Vbr=18.9..20.9V, 181A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PEU	-	TV50C200K-G	TVS	Vrwm=20.0V, Vbr=22.20..27.10V, Ipp=141.06A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PEV	-	5.0SMCJ18A	TVS	Vrwm=18.0V, Vbr=20.0..22.1V, 172.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PEV	-	5.0SMDG18A	TVS	Vrwm=18.0V, Vbr=20.0..22.1V, 172.0A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PEV	-	5.0SMDJ18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, 172.9A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PEV	-	5.0SMDJ18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, 172.9A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PEV	-	5.0SMDJ20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, 155.9A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PEV	-	5.0SMLJ18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, 172A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PEV	-	TV50C200J-G	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=155.86A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PEW	-	5.0SMCJ20A	TVS	Vrwm=20.0V, Vbr=22.2..24.5V, 155.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PEW	-	5.0SMDG20A	TVS	Vrwm=20.0V, Vbr=22.2..24.5V, 155.0A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PEW	-	5.0SMDJ20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, 155.9A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PEW	-	5.0SMDJ20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, 155.9A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PEW	-	5.0SMDJ22	TVS	Vbr=24.4..29.8V, Vrwm=22V, 128.2A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PEW	-	5.0SMLJ20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, 155A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PEW	-	TV50C220K-G	TVS	Vrwm=22.0V, Vbr=24.40..29.80V, Ipp=128.17A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PEX	-	5.0SMCJ22A	TVS	Vrwm=22.0V, Vbr=24.4..26.9V, 141.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PEX	-	5.0SMDG22A	TVS	Vrwm=22.0V, Vbr=24.4..26.9V, 141.0A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PEX	-	5.0SMDJ22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, 141A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PEX	-	5.0SMDJ22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, 141A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PEX	-	5.0SMDJ22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, 141A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PEX	-	5.0SMLJ22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, 141A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PEX	-	TV50C220J-G	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=142.25A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PEY	-	5.0SMDJ24	TVS	Vbr=26.7..32.6V, Vrwm=24V, 117.4A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PEY	-	TV50C240K-G	TVS	Vrwm=24.0V, Vbr=26.70..32.60V, Ipp=117.44A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PEZ	-	5.0SMCJ24A	TVS	Vrwm=24.0V, Vbr=26.7..29.5V, 129.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PEZ	-	5.0SMDG24A	TVS	Vrwm=24.0V, Vbr=26.7..29.5V, 129.0A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PEZ	-	5.0SMDJ24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, 129A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PEZ	-	5.0SMDJ24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, 129A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PEZ	-	5.0SMDJ24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, 129A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PEZ	-	5.0SMLJ24A	TVS	Vrwm=24V, Vbr=26.7..29.5V, 129A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PEZ	-	TV50C240J-G	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=129.82A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFD	-	5.0SMDJ26	TVS	Vbr=28.9..35.3V, Vrwm=26V, 108.4A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFD	-	TV50C260K-G	TVS	Vrwm=26.0V, Vbr=28.90..35.30V, Ipp=108.37A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFE	-	5.0SMCJ26A	TVS	Vrwm=26.0V, Vbr=28.9..31.9V, 119.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PFE	-	5.0SMDG26A	TVS	Vrwm=26.0V, Vbr=28.9..31.9V, 119.0A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PFE	-	5.0SMDJ26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, 119A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFE	-	5.0SMDJ26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, 119A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PFE	-	5.0SMDJ26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, 119A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PFE	-	5.0SMLJ26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, 119A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PFE	-	TV50C260J-G	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=119.95A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFF	-	5.0SMDJ28	TVS	Vbr=31.1..38.0V, Vrwm=28V, 101.0A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFF	-	TV50C280K-G	TVS	Vrwm=28.0V, Vbr=31.10..38.0V, Ipp=101.0A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFG	-	5.0SMCJ28A	TVS	Vrwm=28.0V, Vbr=31.1..34.4V, 110.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5PFG	-	5.0SMDG28A	TVS	Vrwm=28.0V, Vbr=31.1..34.4V, 110.0A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PFG	-	5.0SMDJ28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, 110A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFG	-	5.0SMDJ28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, 110A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PFG	-	5.0SMDJ28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, 110A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PFG	-	5.0SMLJ28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, 110A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PFG	-	TV50C280J-G	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=111.23A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFH	-	5.0SMDJ30	TVS	Vbr=33.3..40.7V, Vrwm=30V, 94.4A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFH	-	TV50C300K-G	TVS	Vrwm=30.0V, Vbr=33.30..40.70V, Ipp=94.39A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFK	-	5.0SMCJ30A	TVS	Vrwm=30.0V, Vbr=33.3..36.8V, 103.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PFK	-	5.0SMDG30A	TVS	Vrwm=30.0V, Vbr=33.3..36.8V, 103.0A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PFK	-	5.0SMDJ30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, 103A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PFK	-	5.0SMDJ30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, 103A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFK	-	5.0SMDJ30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, 103A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PFK	-	5.0SMLJ30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, 103A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PFK	-	TV50C300J-G	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=104.34A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFL	-	5.0SMDJ33	TVS	Vbr=36.7..44.9V, Vrwm=33V, 85.6A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFL	-	TV50C330K-G	TVS	Vrwm=33.0V, Vbr=36.70..44.90V, Ipp=85.59A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFM	-	5.0SMCJ33A	TVS	Vrwm=33.0V, Vbr=36.7..40.6V, 93.9A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PFM	-	5.0SMDG33A	TVS	Vrwm=33.0V, Vbr=36.7..40.6V, 93.9A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PFM	-	5.0SMDJ33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, 93.9A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PFM	-	5.0SMDJ33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, 93.9A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFM	-	5.0SMDJ33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, 93.9A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PFM	-	5.0SMLJ33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, 93.9A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PFM	-	TV50C330J-G	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=94.75A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFN	-	5.0SMDJ36	TVS	Vbr=40.0..48.9V, Vrwm=36V, 78.5A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFN	-	TV50C360K-G	TVS	Vrwm=36.0V, Vbr=40.0..48.90V, Ipp=78.54A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFP	-	5.0SMCJ36A	TVS	Vrwm=36.0V, Vbr=40.0..44.2V, 86.1A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PFP	-	5.0SMDG36A	TVS	Vrwm=36.0V, Vbr=40.0..44.2V, 86.1A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PFP	-	5.0SMDJ36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, 86.1A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PFP	-	5.0SMDJ36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, 86.1A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PFP	-	5.0SMDJ36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, 86.1A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFP	-	5.0SMLJ36A	TVS	Vrwm=36.V, Vbr=40.0..44.2V, 86.1A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PFP	-	TV50C360J-G	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=86.92A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFQ	-	5.0SMDJ40	TVS	Vbr=44.4..54.3V, Vrwm=40V, 70.7A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFQ	-	TV50C400K-G	TVS	Vrwm=40.0V, Vbr=44.40..54.30V, Ipp=70.73A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFR	-	5.0SMCJ40A	TVS	Vrwm=40.0V, Vbr=44.4..49.1V, 77.6A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PFR	-	5.0SMDG40A	TVS	Vrwm=40.0V, Vbr=44.4..49.1V, 77.6A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PFR	-	5.0SMDJ40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, 77.6A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFR	-	5.0SMDJ40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, 77.6A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PFR	-	5.0SMDJ40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, 77.6A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PFR	-	5.0SMLJ40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, 77.6A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PFR	-	TV50C400J-G	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=78.29A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFS	-	5.0SMDJ43	TVS	Vbr=47.8..58.4V, Vrwm=43V, 65.8A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFS	-	TV50C430K-G	TVS	Vrwm=43.0V, Vbr=47.80..58.40V, Ipp=65.84A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFT	-	5.0SMCJ43A	TVS	Vrwm=43.0V, Vbr=47.8..52.8V, 72.1A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PFT	-	5.0SMDG43A	TVS	Vrwm=43.0V, Vbr=47.8..52.8V, 72.1A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PFT	-	5.0SMDJ43A	TVS	Vbr=47.8..52.8V, Vrwm=43V, 72.1A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PFT	-	5.0SMDJ43A	TVS	Vbr=47.8..52.8V, Vrwm=43V, 72.1A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PFT	-	5.0SMDJ43A	TVS	Vbr=47.8..52.8V, Vrwm=43V, 72.1A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFT	-	5.0SMLJ43A	TVS	Vrwm=43V, Vbr=47.8..52.8V, 72.1A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PFT	-	TV50C430J-G	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=72.77A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFU	-	5.0SMDJ45	TVS	Vbr=50.0..61.1V, Vrwm=45V, 62.9A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFU	-	TV50C450K-G	TVS	Vrwm=45.0V, Vbr=50.0..61.10V, Ipp=62.89A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFV	-	5.0SMCJ45A	TVS	Vrwm=45.0V, Vbr=50.0..55.3V, 68.8A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PFV	-	5.0SMDG45A	TVS	Vrwm=45.0V, Vbr=50.0..55.3V, 68.8A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PFV	-	5.0SMDJ45A	TVS	Vbr=50.0..55.3V, Vrwm=45V, 68.8A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PFV	-	5.0SMDJ45A	TVS	Vbr=50.0..55.3V, Vrwm=45V, 68.8A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PFV	-	5.0SMDJ45A	TVS	Vbr=50.0..55.3V, Vrwm=45V, 68.8A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFV	-	5.0SMLJ45A	TVS	Vrwm=45V, Vbr=50.0..55.3V, 68.8A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PFV	-	TV50C450J-G	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=69.46A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFW	-	5.0SMDJ48	TVS	Vbr=53.3..65.1V, Vrwm=48V, 59.1A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFW	-	TV50C480K-G	TVS	Vrwm=48.0V, Vbr=53.30..65.10V, Ipp=59.06A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFX	-	5.0SMCJ48A	TVS	Vrwm=48.0V, Vbr=53.3..58.9V, 64.7A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PFX	-	5.0SMDG48A	TVS	Vrwm=48.0V, Vbr=53.3..58.9V, 64.7A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PFX	-	5.0SMDJ48A	TVS	Vbr=53.3..58.9V, Vrwm=48V, 64.7A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFX	-	5.0SMDJ48A	TVS	Vbr=53.3..58.9V, Vrwm=48V, 64.7A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PFX	-	5.0SMDJ48A	TVS	Vbr=53.3..58.9V, Vrwm=48V, 64.7A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PFX	-	5.0SMLJ48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, 64.7A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PFX	-	TV50C480J-G	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=65.25A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFY	-	5.0SMDJ51	TVS	Vbr=56.7..69.3V, Vrwm=51V, 55.4A, 5000W(1ms)	DO-214AB	1d	1a	Pic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5PFY	-	TV50C510K-G	TVS	Vrwm=51.0V, Vbr=56.70..69.30V, Ipp=55.43A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PFZ	-	5.0SMCJ51A	TVS	Vrwm=51.0V, Vbr=56.7..62.7V, 60.7A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PFZ	-	5.0SMDG51A	TVS	Vrwm=51.0V, Vbr=56.7..62.7V, 60.7A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PFZ	-	5.0SMDJ51A	TVS	Vbr=56.7..62.7V, Vrwm=51V, 60.7A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PFZ	-	5.0SMDJ51A	TVS	Vbr=56.7..62.7V, Vrwm=51V, 60.7A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PFZ	-	5.0SMDJ51A	TVS	Vbr=56.7..62.7V, Vrwm=51V, 60.7A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PFZ	-	5.0SMLJ51A	TVS	Vrwm=51V, Vbr=56.7..62.7V, 60.7A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PFZ	-	TV50C510J-G	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=61.29A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGA	-	5.0SMDJ80	TVS	Vbr=89.0..109V, Vrwm=80V, 35.3A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGA	-	TV50C800K-G	TVS	Vrwm=80.0V, Vbr=88.96..108.80V, Ipp=35.27A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGB	-	5.0SMDJ80A	TVS	Vbr=88.8..97.6V, Vrwm=80V, 39.0A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGB	-	TV50C800J-G	TVS	Vrwm=80.0V, Vbr=88.80..97.60V, Ipp=38.97A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGD	-	5.0SMDJ54	TVS	Vbr=60.0..73.3V, Vrwm=54V, 52.4A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGD	-	TV50C540K-G	TVS	Vrwm=54.0V, Vbr=60.0..73.30V, Ipp=52.44A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGE	-	5.0SMCJ54A	TVS	Vrwm=54.0V, Vbr=60.0..66.3V, 57.5A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PGE	-	5.0SMDG54A	TVS	Vrwm=54.0V, Vbr=60.0..66.3V, 57.5A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PGE	-	5.0SMDJ54A	TVS	Vbr=60.0..66.3V, Vrwm=54V, 57.5A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PGE	-	5.0SMDJ54A	TVS	Vbr=60.0..66.3V, Vrwm=54V, 57.5A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PGE	-	5.0SMDJ54A	TVS	Vbr=60.0..66.3V, Vrwm=54V, 57.5A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGE	-	5.0SMLJ54A	TVS	Vrwm=54V, Vbr=60.0..66.3V, 57.5A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PGE	-	TV50C540J-G	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=57.98A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGF	-	5.0SMDJ58	TVS	Vbr=64.4..78.7V, Vrwm=58V, 49.0A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGF	-	TV50C580K-G	TVS	Vrwm=58.0V, Vbr=64.40..78.70V, Ipp=49.03A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGG	-	5.0SMCJ58A	TVS	Vrwm=58.0V, Vbr=64.4..71.2V, 53.5A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PGG	-	5.0SMDG58A	TVS	Vrwm=58.0V, Vbr=64.4..71.2V, 53.5A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PGG	-	5.0SMDJ58A	TVS	Vbr=64.4..71.2V, Vrwm=58V, 53.5A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PGG	-	5.0SMDJ58A	TVS	Vbr=64.4..71.2V, Vrwm=58V, 53.5A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGG	-	5.0SMDJ58A	TVS	Vbr=64.4..71.2V, Vrwm=58V, 53.5A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PGG	-	5.0SMLJ58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, 53.5A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PGG	-	TV50C580J-G	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=53.95A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGH	-	5.0SMDJ60	TVS	Vbr=66.7..81.5V, Vrwm=60V, 47.2A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGH	-	TV50C600K-G	TVS	Vrwm=60.0V, Vbr=66.70..81.50V, Ipp=47.20A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGK	-	5.0SMCJ60A	TVS	Vrwm=60.0V, Vbr=66.7..73.7V, 51.7A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PGK	-	5.0SMDG60A	TVS	Vrwm=60.0V, Vbr=66.7..73.7V, 51.7A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PGK	-	5.0SMDJ60A	TVS	Vbr=66.7..73.7V, Vrwm=60V, 51.7A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PGK	-	5.0SMDJ60A	TVS	Vbr=66.7..73.7V, Vrwm=60V, 51.7A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGK	-	5.0SMDJ60A	TVS	Vbr=66.7..73.7V, Vrwm=60V, 51.7A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PGK	-	5.0SMLJ60A	TVS	Vrwm=60V, Vbr=66.7..73.7V, 51.7A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PGK	-	TV50C600J-G	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=52.17A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGL	-	5.0SMDJ64	TVS	Vbr=71.1..86.9V, Vrwm=64V, 44.3A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGL	-	TV50C640K-G	TVS	Vrwm=64.0V, Vbr=71.10..86.90V, Ipp=44.30A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGM	-	5.0SMCJ64A	TVS	Vrwm=64.0V, Vbr=71.1..78.6V, 48.6A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PGM	-	5.0SMDG64A	TVS	Vrwm=64.0V, Vbr=71.1..78.6V, 48.6A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PGM	-	5.0SMDJ64A	TVS	Vbr=71.1..78.6V, Vrwm=64V, 48.6A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGM	-	5.0SMDJ64A	TVS	Vbr=71.1..78.6V, Vrwm=64V, 48.6A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PGM	-	5.0SMDJ64A	TVS	Vbr=71.1..78.6V, Vrwm=64V, 48.6A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PGM	-	5.0SMLJ64A	TVS	Vrwm=64V, Vbr=71.1..78.6V, 48.6A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PGM	-	TV50C640J-G	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=49.03A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGN	-	5.0SMDJ70	TVS	Vbr=77.8..95.1V, Vrwm=70V, 40.4A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGN	-	TV50C700K-G	TVS	Vrwm=70.0V, Vbr=77.80..95.10V, Ipp=40.40A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGP	-	5.0SMCJ70A	TVS	Vrwm=70.0V, Vbr=77.8..86.0V, 44.3A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PGP	-	5.0SMDG70A	TVS	Vrwm=70.0V, Vbr=77.8..86.0V, 44.3A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PGP	-	5.0SMDJ70A	TVS	Vbr=77.8..86V, Vrwm=70V, 44.3A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PGP	-	5.0SMDJ70A	TVS	Vbr=77.8..86V, Vrwm=70V, 44.3A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PGP	-	5.0SMDJ70A	TVS	Vbr=77.8..86V, Vrwm=70V, 44.3A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGP	-	5.0SMLJ70A	TVS	Vrwm=70V, Vbr=77.8..86.0V, 44.3A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PGP	-	TV50C700J-G	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=44.69A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGQ	-	5.0SMDJ75	TVS	Vbr=83.3..102V, Vrwm=75V, 37.7A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGQ	-	TV50C750K-G	TVS	Vrwm=75.0V, Vbr=83.30..102.0V, Ipp=37.69A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGR	-	5.0SMCJ75A	TVS	Vrwm=75.0V, Vbr=83.3..92.1V, 41.4A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PGR	-	5.0SMDG75A	TVS	Vrwm=75.0V, Vbr=83.3..92.1V, 41.4A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PGR	-	5.0SMDJ75A	TVS	Vbr=83.3..92.1V, Vrwm=75V, 41.4A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGR	-	5.0SMDJ75A	TVS	Vbr=83.3..92.1V, Vrwm=75V, 41.4A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PGR	-	5.0SMDJ75A	TVS	Vbr=83.3..92.1V, Vrwm=75V, 41.4A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PGR	-	5.0SMLJ75A	TVS	Vrwm=75V, Vbr=83.3..92.1V, 41.4A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PGR	-	TV50C750J-G	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=41.74A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGS	-	5.0SMDJ78	TVS	Vbr=86.7..106V, Vrwm=78V, 36.3A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGS	-	TV50C780K-G	TVS	Vrwm=78.0V, Vbr=86.70..106.0V, Ipp=36.33A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGT	-	5.0SMCJ78A	TVS	Vrwm=78.0V, Vbr=86.7..95.8V, 39.7A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PGT	-	5.0SMDG78A	TVS	Vrwm=78.0V, Vbr=86.7..95.8V, 39.7A, 5000W(1ms)	DO-215AB	5d	1a	Lge

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5PGT	-	5.0SMDJ78A	TVS	Vbr=86.7..95.8V, Vrwm=78V, 39.7A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PGT	-	5.0SMDJ78A	TVS	Vbr=86.7..95.8V, Vrwm=78V, 39.7A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PGT	-	5.0SMDJ78A	TVS	Vbr=86.7..95.8V, Vrwm=78V, 39.7A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGT	-	5.0SMLJ78A	TVS	Vrwm=78V, Vbr=86.7..95.8V, 39.7A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PGT	-	TV50C780J-G	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=40.08A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGU	-	5.0SMDJ85	TVS	Vbr=94.4..115V, Vrwm=85V, 33.4A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGU	-	TV50C850K-G	TVS	Vrwm=85.0V, Vbr=94.40..115.0V, Ipp=33.44A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGV	-	5.0SMCJ85A	TVS	Vrwm=85.0V, Vbr=94.4..104V, 36.5A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PGV	-	5.0SMDG85A	TVS	Vrwm=85.0V, Vbr=94.4..104.0V, 36.5A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PGV	-	5.0SMDJ85A	TVS	Vbr=94.4..104V, Vrwm=85V, 36.5A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PGV	-	5.0SMDJ85A	TVS	Vbr=94.4..104V, Vrwm=85V, 36.5A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PGV	-	5.0SMDJ85A	TVS	Vbr=94.4..104V, Vrwm=85V, 36.5A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGV	-	5.0SMLJ85A	TVS	Vrwm=85V, Vbr=94.4..104V, 36.5A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PGV	-	TV50C850J-G	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=36.86A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGW	-	5.0SMDJ90	TVS	Vbr=100..122V, Vrwm=90V, 31.6A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGW	-	TV50C900K-G	TVS	Vrwm=90V, Vbr=100.0..122.0V, Ipp=31.56A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGX	-	5.0SMCJ90A	TVS	Vrwm=90V, Vbr=100..111V, 34.3A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PGX	-	5.0SMDG90A	TVS	Vrwm=90V, Vbr=100.0..111.0V, 34.3A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PGX	-	5.0SMDJ90A	TVS	Vbr=100..111V, Vrwm=90V, 34.3A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGX	-	5.0SMDJ90A	TVS	Vbr=100..111V, Vrwm=90V, 34.3A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PGX	-	5.0SMDJ90A	TVS	Vbr=100..111V, Vrwm=90V, 34.3A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PGX	-	5.0SMLJ90A	TVS	Vrwm=90V, Vbr=100..111V, 34.3A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PGX	-	TV50C900J-G	TVS	Vrwm=90V, Vbr=100.0..111.0V, Ipp=34.59A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGY	-	5.0SMDJ100	TVS	Vbr=111..136V, Vrwm=100V, 28.2A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGY	-	TV50C101K-G	TVS	Vrwm=100.0V, Vbr=111.0..136.0V, Ipp=28.21A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PGZ	-	5.0SMCJ100A	TVS	Vrwm=100.0V, Vbr=111..123V, 30.9A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PGZ	-	5.0SMDG100A	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, 30.9A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PGZ	-	5.0SMDJ100A	TVS	Vbr=111..123V, Vrwm=100V, 30.9A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PGZ	-	5.0SMDJ100A	TVS	Vbr=111..123V, Vrwm=100V, 30.9A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PGZ	-	5.0SMDJ100A	TVS	Vbr=111..123V, Vrwm=100V, 30.9A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PGZ	-	5.0SMLJ100A	TVS	Vrwm=100V, Vbr=111..123V, 30.9A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PGZ	-	TV50C101J-G	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=31.17A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHA	-	5.0SMDJ140	TVS	Vbr=156..190V, Vrwm=140V, 20.2A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHA	-	TV50C141K-G	TVS	Vrwm=140V, Vbr=155.68..190.4V, Ipp=20.15A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHB	-	5.0SMDJ140A	TVS	Vbr=155..171V, Vrwm=140V, 22.3A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHB	-	TV50C141J-G	TVS	Vrwm=140V, Vbr=155.0..171.0V, Ipp=22.27A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHD	-	5.0SMDJ110	TVS	Vbr=122..149V, Vrwm=110V, 25.8A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHD	-	TV50C111K-G	TVS	Vrwm=110.0V, Vbr=122.0..149.0V, Ipp=25.77A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHE	-	5.0SMCJ110A	TVS	Vrwm=110.0V, Vbr=122..135V, 28.3A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PHE	-	5.0SMDG110A	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, 28.3A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PHE	-	5.0SMDJ110A	TVS	Vbr=122..135V, Vrwm=110V, 28.3A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHE	-	5.0SMDJ110A	TVS	Vbr=122..135V, Vrwm=110V, 28.3A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PHE	-	5.0SMDJ110A	TVS	Vbr=122..135V, Vrwm=110V, 28.3A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PHE	-	5.0SMLJ110A	TVS	Vrwm=110V, Vbr=122..135V, 28.3A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PHE	-	TV50C111J-G	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=28.53A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHF	-	5.0SMDJ120	TVS	Vbr=133..163V, Vrwm=120V, 23.6A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHF	-	TV50C121K-G	TVS	Vrwm=120.0V, Vbr=133.0..163.0V, Ipp=23.60A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHG	-	5.0SMCJ120A	TVS	Vrwm=120.0V, Vbr=133..147V, 26.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PHG	-	5.0SMDG120A	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, 26.0A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PHG	-	5.0SMDJ120A	TVS	Vbr=133..147V, Vrwm=120V, 26.0A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHG	-	5.0SMDJ120A	TVS	Vbr=133..147V, Vrwm=120V, 26.0A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PHG	-	5.0SMDJ120A	TVS	Vbr=133..147V, Vrwm=120V, 26.0A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PHG	-	5.0SMLJ120A	TVS	Vrwm=120V, Vbr=133..147V, 26A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PHG	-	TV50C121J-G	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=26.17A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHH	-	5.0SMDJ130	TVS	Vbr=144..176V, Vrwm=130V, 21.9A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHH	-	TV50C131K-G	TVS	Vrwm=130V, Vbr=144.0..176.0V, Ipp=21.86A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHK	-	5.0SMCJ130A	TVS	Vrwm=130V, Vbr=144..159V, 24.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PHK	-	5.0SMDG130A	TVS	Vrwm=130V, Vbr=144.0..159.0V, 24.0A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PHK	-	5.0SMDJ130A	TVS	Vbr=144..159V, Vrwm=130V, 24.0A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PHK	-	5.0SMDJ130A	TVS	Vbr=144..159V, Vrwm=130V, 24.0A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PHK	-	5.0SMDJ130A	TVS	Vbr=144..159V, Vrwm=130V, 24.0A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHK	-	5.0SMLJ130A	TVS	Vrwm=130V, Vbr=144..159V, 24A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PHK	-	TV50C131J-G	TVS	Vrwm=130V, Vbr=144.0..159.0V, Ipp=24.16A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHL	-	5.0SMDJ150	TVS	Vbr=167..204V, Vrwm=150V, 18.8A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHL	-	TV50C151K-G	TVS	Vrwm=150.0V, Vbr=167.0..204.0V, Ipp=18.84A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHM	-	5.0SMCJ150A	TVS	Vrwm=150.0V, Vbr=167..185V, 20.6A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PHM	-	5.0SMDG150A	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, 20.6A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PHM	-	5.0SMDJ150A	TVS	Vbr=167..185V, Vrwm=150V, 20.6A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PHM	-	5.0SMDJ150A	TVS	Vbr=167..185V, Vrwm=150V, 20.6A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PHM	-	5.0SMDJ150A	TVS	Vbr=167..185V, Vrwm=150V, 20.6A, 5000W(1ms)	DO-214AB	1d	1a	Pic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5PHM	-	5.0SMLJ150A	TVS	Vrwm=150V, Vbr=167..185V, 20.6A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PHM	-	TV50C151J-G	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=20.78A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHN	-	5.0SMDJ160	TVS	Vbr=178..218V, Vrwm=160V, 17.6A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHN	-	TV50C161K-G	TVS	Vrwm=160.0V, Vbr=178.0..218.0V, Ipp=17.60A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHP	-	5.0SMCJ160A	TVS	Vrwm=160.0V, Vbr=178..197V, 19.3A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PHP	-	5.0SMDG160A	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, 19.3A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PHP	-	5.0SMDJ160A	TVS	Vbr=178..197V, Vrwm=160V, 19.3A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHP	-	5.0SMDJ160A	TVS	Vbr=178..197V, Vrwm=160V, 19.3A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PHP	-	5.0SMDJ160A	TVS	Vbr=178..197V, Vrwm=160V, 19.3A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PHP	-	5.0SMLJ160A	TVS	Vrwm=160V, Vbr=178..197V, 19.3A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PHP	-	TV50C161J-G	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=19.50A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHQ	-	5.0SMDJ170	TVS	Vbr=189..231V, Vrwm=170V, 16.6A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHQ	-	TV50C171K-G	TVS	Vrwm=170.0V, Vbr=189.0..231.0V, Ipp=16.61A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHR	-	5.0SMCJ170A	TVS	Vrwm=170.0V, Vbr=189..209V, 18.2A, 5000W(1ms)	DO-214AB	1d	1a	Ext
5PHR	-	5.0SMDG170A	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, 18.2A, 5000W(1ms)	DO-215AB	5d	1a	Lge
5PHR	-	5.0SMDJ170A	TVS	Vbr=189..209V, Vrwm=170V, 18.2A, 5000W(1ms)	DO-214AB	1d	2s	Lif
5PHR	-	5.0SMDJ170A	TVS	Vbr=189..209V, Vrwm=170V, 18.2A, 5000W(1ms)	DO-214AB	1d	1b	Rul
5PHR	-	5.0SMDJ170A	TVS	Vbr=189..209V, Vrwm=170V, 18.2A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHR	-	5.0SMLJ170A	TVS	Vrwm=170V, Vbr=189..209V, 18.2A, 5000W(1ms)	DO-214AB	1d	1a	Mde
5PHR	-	TV50C171J-G	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=18.36A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHS	-	5.0SMDJ180	TVS	Vbr=200..245V, Vrwm=180V, 15.7A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHS	-	TV50C181K-G	TVS	Vrwm=180.0V, Vbr=200.16..244.80V, Ipp=15.67A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHT	-	5.0SMDJ180A	TVS	Vbr=200..220V, Vrwm=180V, 17.3A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHT	-	TV50C181J-G	TVS	Vrwm=180.0V, Vbr=200.0..220.0V, Ipp=17.32A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHU	-	5.0SMDJ190	TVS	Vbr=211..258V, Vrwm=190V, 14.8A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHU	-	TV50C191K-G	TVS	Vrwm=190.0V, Vbr=211.28..258.40V, Ipp=14.85A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHV	-	5.0SMDJ190A	TVS	Vbr=211..232V, Vrwm=190V, 16.4A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHV	-	TV50C191J-G	TVS	Vrwm=190.0V, Vbr=211.0..232.0V, Ipp=16.41A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHW	-	5.0SMDJ200A	TVS	Vbr=224..247V, Vrwm=200V, 9.3A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHW	-	TV50C201J-G	TVS	Vrwm=200.0V, Vbr=224.0..247.0V, Ipp=9.26A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHX	-	5.0SMDJ220A	TVS	Vbr=246 272V, Vrwm=220V8.4A, , 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHX	-	TV50C221J-G	TVS	Vrwm=220.0V, Vbr=246.0..272.0V, Ipp=8.43A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PHZ	-	5.0SMDJ250A	TVS	Vbr=279..309V, Vrwm=250V, 7.4A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PHZ	-	TV50C251J-G	TVS	Vrwm=250.0V, Vbr=279.0..309.0V, Ipp=7.41A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PJE	-	5.0SMDJ300A	TVS	Vbr=335..371V, Vrwm=300V, 6.2A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PJE	-	TV50C301J-G	TVS	Vrwm=300.0V, Vbr=335.0..371.0V, Ipp=6.17A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PJG	-	5.0SMDJ350A	TVS	Vbr=391..432V, Vrwm=350V, 5.3A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PJG	-	TV50C351J-G	TVS	Vrwm=350.0V, Vbr=391.0..432.0V, Ipp=5.29A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PJK	-	5.0SMDJ400A	TVS	Vbr=447..494V, Vrwm=400V, 4.6A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PJK	-	TV50C401J-G	TVS	Vrwm=400.0V, Vbr=447.0..494.0V, Ipp=4.63A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5PJM	-	5.0SMDJ440A	TVS	Vbr=492..543V, Vrwm=440V, 4.2A, 5000W(1ms)	DO-214AB	1d	1a	Pic
5PJM	-	TV50C441J-G	TVS	Vrwm=440.0V, Vbr=492.0..543.0V, Ipp=4.21A, 5000W(1ms)	DO-214AB	1d	2o	Cmc
5Q	-	DDZ39F	Zener diode	39V±10%, Izt=5mA, 200mW	SOD-523	6d	1d	Di
5Q	-	DDZ39FS	Zener diode	39V±10%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
5Q1	-	STZ8360A	Zener diode	34.1..35.9V, Izt=2mA, Zzt=250Ω, 300mW	SOD-323	5d	1a	Jiy
5R	-	MM1Z30	Zener diode	30V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Eic
5R	-	MM5Z24V	Zener diode	22.8..25.6V, Zzt=70Ω, Izt=5mA, 200mW	SOD-523FL	7d	1a	F
5R	-	TCBZX584C24V	Zener diode	22.8..25.6V, Izt=5mA, Zzt=70Ω, 200mW	SOD-523FL	7d	1a	Tac
5R	-	TCMM5Z24V	Zener diode	22.8..25.6V, Izt=5mA, Zzt=70Ω, 200mW	SOD-523FL	7d	1a	Tac
5RD	-	TV05A510K-G	TVS	Vbr=56.7..69.3V, Vrwm=51.0V, Ipp=5.49A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RE	-	TV05A510J-G	TVS	Vbr=56.7..62.7V, Vrwm=51.0V, Ipp=6.07A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RF	-	TV05A540K-G	TVS	Vbr=60.0..73.3V, Vrwm=54.0V, Ipp=5.19A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RG	-	TV05A540J-G	TVS	Vbr=60.0..66.3V, Vrwm=54.0V, Ipp=5.74A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RH	-	TV05A580K-G	TVS	Vbr=64.4..78.7V, Vrwm=58.0V, Ipp=4.85A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RK	-	TV05A580J-G	TVS	Vbr=64.4..71.2V, Vrwm=58.0V, Ipp=5.34A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RL	-	TV05A600K-G	TVS	Vbr=66.7..81.5V, Vrwm=60.0V, Ipp=4.67A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RM	-	TV05A600J-G	TVS	Vbr=66.7..73.7V, Vrwm=60.0V, Ipp=5.17A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RN	-	TV05A640K-G	TVS	Vbr=71.1..86.9V, Vrwm=64.0V, Ipp=4.39A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RP	-	TV05A640J-G	TVS	Vbr=71.1..78.6V, Vrwm=64.0V, Ipp=4.85A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RQ	-	TV05A700K-G	TVS	Vbr=77.8..95.1V, Vrwm=70.0V, Ipp=4.0A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RR	-	TV05A700J-G	TVS	Vbr=77.8..86.0V, Vrwm=70.0V, Ipp=4.42A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RS	-	TV05A750K-G	TVS	Vbr=83.3..102V, Vrwm=75.0V, Ipp=3.73A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RT	-	TV05A750J-G	TVS	Vbr=83.3..92.1V, Vrwm=75.0V, Ipp=4.13A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RU	-	TV05A780K-G	TVS	Vbr=86.7..106V, Vrwm=78.0V, Ipp=3.60A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RV	-	TV05A780J-G	TVS	Vbr=86.7..95.8V, Vrwm=78.0V, Ipp=3.97A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RW	-	TV05A800K-G	TVS	Vbr=89.0..109V, Vrwm=80.0V, Ipp=3.49A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RX	-	TV05A800J-G	TVS	Vbr=88.8..97.6V, Vrwm=80.0V, Ipp=3.86A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RY	-	TV05A850K-G	TVS	Vbr=94.4..115V, Vrwm=85.0V, Ipp=3.31A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5RZ	-	TV05A850J-G	TVS	Vbr=94.4..104V, Vrwm=85.0V, Ipp=3.65A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5S	-	MM5Z27V	Zener diode	25.1..28.9V, Zzt=80Ω, Izt=2mA, 200mW	SOD-523FL	7d	1a	F

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5S	-	TCBZX584C27V	Zener diode	25.1..28.9V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523FL	7d	1a	Tac
5S	-	TCMM5Z27V	Zener diode	25.1..28.9V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523FL	7d	1a	Tac
5S1	-	STZ8360C	Zener diode	36.1..37.9V, Izt=2mA, Zzt=250Ω, 300mW	SOD-323	5d	1a	Jiy
5SD	-	TV05A900K-G	TVS	Vbr=100..122V, Vrwm=90V, Ipp=3.13A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SE	-	TV05A900J-G	TVS	Vbr=100..111V, Vrwm=90V, Ipp=3.42A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SF	-	TV05A101K-G	TVS	Vbr=111..136V, Vrwm=100V, Ipp=2.79A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SG	-	TV05A101J-G	TVS	Vbr=111..123V, Vrwm=100V, Ipp=3.09A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SH	-	TV05A111K-G	TVS	Vbr=122..149V, Vrwm=110V, Ipp=2.55A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SK	-	TV05A111J-G	TVS	Vbr=122..135V, Vrwm=110V, Ipp=2.82A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SL	-	TV05A121K-G	TVS	Vbr=133..163V, Vrwm=120V, Ipp=2.34A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SM	-	TV05A121J-G	TVS	Vbr=133..147V, Vrwm=120V, Ipp=2.59A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SN	-	TV05A131K-G	TVS	Vbr=144..176V, Vrwm=130V, Ipp=2.16A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SP	-	TV05A131J-G	TVS	Vbr=144..159V, Vrwm=130V, Ipp=2.39A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SQ	-	TV05A141K-G	TVS	Vbr=156..190V, Vrwm=140V, Ipp=2.0A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SR	-	TV05A141J-G	TVS	Vbr=155..171V, Vrwm=140V, Ipp=2.20A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SS	-	TV05A151K-G	TVS	Vbr=167..204V, Vrwm=150V, Ipp=1.87A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5ST	-	TV05A151J-G	TVS	Vbr=167..185V, Vrwm=150V, Ipp=2.06A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SU	-	TV05A161K-G	TVS	Vbr=178..218V, Vrwm=160V, Ipp=1.74A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SV	-	TV05A161J-G	TVS	Vbr=178..197V, Vrwm=160V, Ipp=1.93A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SW	-	TV05A171K-G	TVS	Vbr=189..231V, Vrwm=170V, Ipp=1.64A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SX	-	TV05A171J-G	TVS	Vbr=189..209V, Vrwm=170V, Ipp=1.82A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SY	-	TV05A181K-G	TVS	Vbr=200..245V, Vrwm=180V, Ipp=1.55A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5SZ	-	TV05A181J-G	TVS	Vbr=200..220V, Vrwm=180V, Ipp=1.71A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5T	-	MM5Z30V	Zener diode	28..32V, Zzt=80Ω, Izt=2mA, 200mW	SOD-523FL	7d	1a	F
5T	-	TCBZX584C30V	Zener diode	28..32V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523FL	7d	1a	Tac
5T	-	TCMM5Z30V	Zener diode	28..32V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523FL	7d	1a	Tac
5TD	-	TV05A191K-G	TVS	Vbr=211..258V, Vrwm=190V, Ipp=1.47A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5TE	-	TV05A191J-G	TVS	Vbr=211..232V, Vrwm=190V, Ipp=1.62A, 500W(1ms)	DO-214AC	1d	2o	Cmc
5U	-	MM5Z33V	Zener diode	31..35V, Zzt=80Ω, Izt=2mA, 200mW	SOD-523FL	7d	1a	F
5U	-	SD05	TVS	Vrwm=5V, Vbr=6.2..7.3V, Ipp=24A, 350W(1ms)	SOD-323	5d	1a	Smt
5U	-	TCBZX584C33V	Zener diode	31..35V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523FL	7d	1a	Tac
5U	-	TCMM5Z33V	Zener diode	31..35V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523FL	7d	1a	Tac
5U1	-	STZ8390A	Zener diode	37.1..39V, Izt=2mA, Zzt=300Ω, 300mW	SOD-323	5d	1a	Jiy
5UD	-	TV05A191KB-G	TVS	Vbr=211..258V, Vrwm=190V, Ipp=1.47A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5UE	-	TV05A191JB-G	TVS	Vbr=211..232V, Vrwm=190V, Ipp=1.62A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5V	-	MM5Z36V	Zener diode	34..38V, Zzt=90Ω, Izt=2mA, 200mW	SOD-523FL	7d	1a	F
5V	-	TCBZX584C36V	Zener diode	34..38V, Izt=2mA, Zzt=90Ω, 200mW	SOD-523FL	7d	1a	Tac
5V	-	TCMM5Z36V	Zener diode	34..38V, Izt=2mA, Zzt=90Ω, 200mW	SOD-523FL	7d	1a	Tac
5V0	-	SMA5.0	TVS	Vbr=6.4..7.81V, Vrwm=5.0V, 31.3A, 300W(1ms)	DO-214AC	1d	1a	Mic
5V0	-	SMB5.0	TVS	Vbr=6.4..7.82V, Vrwm=5V, 62.5A, 600W(1ms)	DO-214AA	1d	1a	Mic
5V0	-	SMC5.0	TVS	Vbr=6.4..7.82V, Vrwm=5V, 156.3A, 1500W(1ms),	DO-214AB	1d	1a	Mic
5V0A	-	SMA5.0A	TVS	Vbr=6.4..7.08V, Vrwm=5.0V, 32.6A, 300W(1ms)	DO-214AC	1d	1a	Mic
5V0A	-	SMB5.0A	TVS	Vbr=6.4..7.07V, Vrwm=5V, 65.2A, 600W(1ms)	DO-214AA	1d	1a	Mic
5V0A	-	SMC5.0A	TVS	Vbr=6.4..7.07V, Vrwm=5V, 163A, 1500W(1ms),	DO-214AB	1d	1a	Mic
5V0C	-	SMA5.0C	TVS	Vbr=6.4..7.81V, Vrwm=5.0V, 31.3A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
5V0C	-	SMB5.0C	TVS	Vbr=6.4..7.82V, Vrwm=5V, 62.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
5V0C	-	SMC5.0C	TVS	Vbr=6.4..7.82V, Vrwm=5V, 156.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
5V0CA	-	SMA5.0CA	TVS	Vbr=6.4..7.08V, Vrwm=5.0V, 32.6A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
5V0CA	-	SMB5.0CA	TVS	Vbr=6.4..7.07V, Vrwm=5V, 65.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
5V0CA	-	SMC5.0CA	TVS	Vbr=6.4..7.07V, Vrwm=5V, 163A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
5V1	-	BZD27C5V1P	Zener diode	4.85..5.36V, Zzt=6Ω, Izt=100mA, 800mW	SOD-123FL	7d	1a	Pjt
5V1	-	BZY55-C5V1	Zener diode	4.85..5.36V, Izt=5mA, Zzt=50Ω, 500mW	0805	70d	2d	Tsc
5V1	-	CDZ55C5V1	Zener diode	4.85..5.36V, Zzt=50Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
5V1	-	CDZ55C5V1S	Zener diode	4.85..5.36V, Zzt=50Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
5V1	-	CTZ55C5V1	Zener diode	4.85..5.36V, Izt=5mA, Zzt=50Ω, 500mW	1206	70d	2d	Ctc
5V1	-	CZRNC55C5V1-G	Zener diode	4.85..5.36V, Zt=50Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
5V1	-	CZRSC55C5V1-G	Zener diode	4.85..5.36V, Zt=50Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
5V1	-	MFPZ5V1	Zener diode	4.85..5.36V, Izt=100mA, Zzt=6Ω, 800mW	SOD-123FL	7d	1a	Ttr
5V1B	-	BZT52B5V1	Zener diode	5.0..5.20V, Izt=5mA, Zzt=60Ω, 500mW	SOD-123FL	7d	1a	Tsc
5V1B	-	MMSZ5V1BW	Zener diode	5.0..5.20V, Izt=5mA, Zzt=60Ω, 500mW	SOD-123FL	7d	1a	Tac
5V1Z	-	BZT52C5V1	Zener diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 500mW	SOD-123FL	7d	1a	Tsc
5V1Z	-	MMSZ5V1CW	Zener diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 500mW	SOD-123FL	7d	1a	Tac
5V1Z	-	TCMMSZ5V1	Zener diode	5.1V±5%, Izt=5mA, Zzt=56Ω, 500mW	SOD-123FL	7d	1a	Tac
5V1Z	-	ZGFM055V1C-MH	Zener diode	4.85..5.36V, Izt=5mA, Zzt=56Ω, 500mW	SOD-123	5d	1a	Pic
5V6	-	BZD27C5V6P	Zener diode	5.32..5.88V, Zzt=4Ω, Izt=100mA, 800mW	SOD-123FL	7d	1a	Pjt
5V6	-	BZY55-C5V6	Zener diode	5.32..5.88V, Izt=5mA, Zzt=30Ω, 500mW	0805	70d	2d	Tsc
5V6	-	CDZ55C5V6	Zener diode	5.32..5.88V, Zzt=30Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
5V6	-	CDZ55C5V6S	Zener diode	5.32..5.88V, Zzt=30Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
5V6	-	CTZ55C5V6	Zener diode	5.32..5.88V, Izt=5mA, Zzt=30Ω, 500mW	1206	70d	2d	Ctc
5V6	-	CZRNC55C5V6-G	Zener diode	5.32..5.88V, Zt=30Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5V6	-	CZRSC55C5V6-G	Zener diode	5.32..5.88V, Zt=30Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
5V6	-	MFPZ5V6	Zener diode	5.32..5.88V, Izt=100mA, Zzt=4Ω, 800mW	SOD-123FL	7d	1a	Ttr
5V6B	-	BZT52B5V6	Zener diode	5.49..5.71V, Izt=5mA, Zzt=40Ω, 500mW	SOD-123FL	7d	1a	Tsc
5V6B	-	MMSZ5V6BW	Zener diode	5.49..5.71V, Izt=5mA, Zzt=40Ω, 500mW	SOD-123FL	7d	1a	Tac
5V6Z	-	BZT52C5V6	Zener diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 500mW	SOD-123FL	7d	1a	Tsc
5V6Z	-	MMSZ5V6CW	Zener diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 500mW	SOD-123FL	7d	1a	Tac
5V6Z	-	TCMMSZ5V6	Zener diode	5.6V±5%, Izt=5mA, Zzt=37Ω, 500mW	SOD-123FL	7d	1a	Tac
5V6Z	-	ZGFM055V6C-MH	Zener diode	5.32..5.88V, Izt=5mA, Zzt=37Ω, 500mW	SOD-123	5d	1a	Pic
5VD	-	TV05A900KB-G	TVS	Vbr=100..122V, Vrwm=90V, Ipp=3.13A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VE	-	TV05A900JB-G	TVS	Vbr=100..111V, Vrwm=90V, Ipp=3.42A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VF	-	TV05A101KB-G	TVS	Vbr=111..136V, Vrwm=100V, Ipp=2.79A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VG	-	TV05A101JB-G	TVS	Vbr=111..123V, Vrwm=100V, Ipp=3.09A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VH	-	TV05A111KB-G	TVS	Vbr=122..149V, Vrwm=110V, Ipp=2.55A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VK	-	TV05A111JB-G	TVS	Vbr=122..135V, Vrwm=110V, Ipp=2.82A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VL	-	TV05A121KB-G	TVS	Vbr=133..163V, Vrwm=120V, Ipp=2.34A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VM	-	TV05A121JB-G	TVS	Vbr=133..147V, Vrwm=120V, Ipp=2.59A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VN	-	TV05A131KB-G	TVS	Vbr=144..176V, Vrwm=130V, Ipp=2.16A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VP	-	TV05A131JB-G	TVS	Vbr=144..159V, Vrwm=130V, Ipp=2.39A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VQ	-	TV05A141KB-G	TVS	Vbr=156..190V, Vrwm=140V, Ipp=2.0A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VR	-	TV05A141JB-G	TVS	Vbr=155..171V, Vrwm=140V, Ipp=2.20A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VS	-	TV05A151KB-G	TVS	Vbr=167..204V, Vrwm=150V, Ipp=1.87A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VT	-	TV05A151JB-G	TVS	Vbr=167..185V, Vrwm=150V, Ipp=2.06A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VU	-	TV05A161KB-G	TVS	Vbr=178..218V, Vrwm=160V, Ipp=1.74A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VV	-	TV05A161JB-G	TVS	Vbr=178..197V, Vrwm=160V, Ipp=1.93A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VW	-	TV05A171KB-G	TVS	Vbr=189..231V, Vrwm=170V, Ipp=1.64A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VX	-	TV05A171JB-G	TVS	Vbr=189..209V, Vrwm=170V, Ipp=1.82A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VY	-	TV05A181KB-G	TVS	Vbr=200..245V, Vrwm=180V, Ipp=1.55A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5VZ	-	TV05A181JB-G	TVS	Vbr=200..220V, Vrwm=180V, Ipp=1.71A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WD	-	TV05A5V0KB-G	TVS	Vbr=6.40..7.30V, Vrwm=5.0V, Ipp=52.1A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WE	-	TV05A5V0JB-G	TVS	Vbr=6.40..7.0V, Vrwm=5.0V, Ipp=54.3A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WF	-	TV05A6V0KB-G	TVS	Vbr=6.67..8.15V, Vrwm=6.0V, Ipp=43.9A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WG	-	TV05A6V0JB-G	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, Ipp=48.5A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WH	-	TV05A6V5KB-G	TVS	Vbr=7.22..8.82V, Vrwm=6.50V, Ipp=40.7A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WK	-	TV05A6V5JB-G	TVS	Vbr=7.22..7.98V, Vrwm=6.50V, Ipp=44.6A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WL	-	TV05A7V0KB-G	TVS	Vbr=7.78..9.51V, Vrwm=7.0V, Ipp=37.6A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WM	-	TV05A7V0JB-G	TVS	Vbr=7.78..8.60V, Vrwm=7.0V, Ipp=41.7A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WN	-	TV05A7V5KB-G	TVS	Vbr=8.33..10.2V, Vrwm=7.50V, Ipp=35.0A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WP	-	TV05A7V5JB-G	TVS	Vbr=8.33..9.21V, Vrwm=7.50V, Ipp=38.8A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WQ	-	TV05A8V0KB-G	TVS	Vbr=8.89..10.9V, Vrwm=8.0V, Ipp=33.3A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WR	-	TV05A8V0JB-G	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, Ipp=36.8A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WS	-	TV05A8V5KB-G	TVS	Vbr=9.44..11.5V, Vrwm=8.50V, Ipp=31.4A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WT	-	TV05A8V5JB-G	TVS	Vbr=9.44..10.4V, Vrwm=8.50V, Ipp=34.7A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WU	-	TV05A9V0KB-G	TVS	Vbr=10.0..12.2V, Vrwm=9.0V, Ipp=29.6A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WV	-	TV05A9V0JB-G	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, Ipp=32.5A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WW	-	TV05A100KB-G	TVS	Vbr=11.1..13.6V, Vrwm=10.0V, Ipp=26.6A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WX	-	TV05A100JB-G	TVS	Vbr=11.1..12.3V, Vrwm=10.0V, Ipp=29.4A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WY	-	TV05A110KB-G	TVS	Vbr=12.2..14.9V, Vrwm=11.0V, Ipp=24.9A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5WZ	-	TV05A110JB-G	TVS	Vbr=12.2..13.5V, Vrwm=11.0V, Ipp=27.5A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5X	-	MM1Z33	Zener diode	33V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Eic
5X	-	MM5Z39V	Zener diode	37..41V, Zzt=130Ω, Izt=2mA, 200mW	SOD-523FL	7d	1a	F
5X	-	TCBZX584C39V	Zener diode	37..41V, Izt=2mA, Zzt=130Ω, 200mW	SOD-523FL	7d	1a	Tac
5X	-	TCMM5Z39V	Zener diode	37..41V, Izt=2mA, Zzt=130Ω, 200mW	SOD-523FL	7d	1a	Tac
5X1	-	STZ8390C	Zener diode	39..41V, Izt=2mA, Zzt=300Ω, 300mW	SOD-323	5d	1a	Jiy
5XD	-	TV05A120KB-G	TVS	Vbr=13.3..16.3V, Vrwm=12V, Ipp=22.7A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XE	-	TV05A120JB-G	TVS	Vbr=13.3..14.7V, Vrwm=12V, Ipp=25.1A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XF	-	TV05A130KB-G	TVS	Vbr=14.4..17.6V, Vrwm=13.0V, Ipp=21.0A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XG	-	TV05A130JB-G	TVS	Vbr=14.4..15.9V, Vrwm=13.0V, Ipp=23.3A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XH	-	TV05A140KB-G	TVS	Vbr=15.6..19.1V, Vrwm=14.0V, Ipp=19.4A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XK	-	TV05A140JB-G	TVS	Vbr=15.6..17.2V, Vrwm=14.0V, Ipp=21.6A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XL	-	TV05A150KB-G	TVS	Vbr=16.7..20.4V, Vrwm=15.0V, Ipp=18.6A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XM	-	TV05A150JB-G	TVS	Vbr=16.7..18.5V, Vrwm=15.0V, Ipp=20.5A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XN	-	TV05A160KB-G	TVS	Vbr=17.8..21.8V, Vrwm=16.0V, Ipp=17.4A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XP	-	TV05A160JB-G	TVS	Vbr=17.8..19.7V, Vrwm=16.0V, Ipp=19.2A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XQ	-	TV05A170KB-G	TVS	Vbr=18.9..23.1V, Vrwm=17.0V, Ipp=16.4A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XR	-	TV05A170JB-G	TVS	Vbr=18.9..20.9V, Vrwm=17.0V, Ipp=18.1A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XS	-	TV05A180KB-G	TVS	Vbr=20.0..24.4V, Vrwm=18.0V, Ipp=15.5A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XT	-	TV05A180JB-G	TVS	Vbr=20.0..22.1V, Vrwm=18.0V, Ipp=17.1A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XU	-	TV05A190KB-G	TVS	Vbr=21.1..25.8V, Vrwm=19.0V, Ipp=14.7A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XV	-	TV05A190JB-G	TVS	Vbr=21.1..23.3V, Vrwm=19.0V, Ipp=16.2A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XW	-	TV05A200KB-G	TVS	Vbr=22.2..27.1V, Vrwm=20.0V, Ipp=14.0A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5XX	-	TV05A200JB-G	TVS	Vbr=22.2..24.5V, Vrwm=20.0V, Ipp=15.4A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XY	-	TV05A220KB-G	TVS	Vbr=24.4..29.8V, Vrwm=22.0V, Ipp=12.7A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5XZ	-	TV05A220JB-G	TVS	Vbr=24.4..26.9V, Vrwm=22.0V, Ipp=14.1A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5Y	-	KDZ15VVY	Zener diode	14.34..14.98V, Izt=5mA, Zzt=15Ω, 100mW	VSC	7d	1a	Kec
5Y	-	MM1Z36	Zener diode	36V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Eic
5Y	-	MM5Z43V	Zener diode	40..46V, Zzt=150Ω, Izt=2mA, 200mW	SOD-523FL	7d	1a	F
5Y	-	TCBZX584C43V	Zener diode	40..46V, Izt=2mA, Zzt=150Ω, 200mW	SOD-523FL	7d	1a	Tac
5Y	-	TCMM5Z43V	Zener diode	40..46V, Izt=2mA, Zzt=150Ω, 200mW	SOD-523FL	7d	1a	Tac
5Y1	-	MM1Z2B4H	Zener diode	2.352..2.448V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1a	Zow
5YD	-	TV05A240KB-G	TVS	Vbr=26.7..32.6V, Vrwm=24.0V, Ipp=11.6A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YE	-	TV05A240JB-G	TVS	Vbr=26.7..29.5V, Vrwm=24.0V, Ipp=12.9A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YF	-	TV05A260KB-G	TVS	Vbr=28.9..35.3V, Vrwm=26.0V, Ipp=10.7A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YG	-	TV05A260JB-G	TVS	Vbr=28.9..31.9V, Vrwm=26.0V, Ipp=11.9A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YH	-	TV05A280KB-G	TVS	Vbr=31.1..38.0V, Vrwm=28.0V, Ipp=10.0A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YK	-	TV05A280JB-G	TVS	Vbr=31.1..34.4V, Vrwm=28.0V, Ipp=11.0A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YL	-	TV05A300KB-G	TVS	Vbr=33.3..40.7V, Vrwm=30.0V, Ipp=9.35A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YM	-	TV05A300JB-G	TVS	Vbr=33.3..36.8V, Vrwm=30.0V, Ipp=10.3A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YN	-	TV05A330KB-G	TVS	Vbr=36.7..44.9V, Vrwm=33.0V, Ipp=8.47A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YP	-	TV05A330JB-G	TVS	Vbr=36.7..40.6V, Vrwm=33.0V, Ipp=9.38A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YQ	-	TV05A360KB-G	TVS	Vbr=40.0..48.9V, Vrwm=36.0V, Ipp=7.78A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YR	-	TV05A360JB-G	TVS	Vbr=40.0..44.2V, Vrwm=36.0V, Ipp=8.61A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YS	-	TV05A400KB-G	TVS	Vbr=44.4..54.3V, Vrwm=40.0V, Ipp=7.0A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YT	-	TV05A400JB-G	TVS	Vbr=44.4..49.1V, Vrwm=40.0V, Ipp=7.75A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YU	-	TV05A430KB-G	TVS	Vbr=47.8..58.4V, Vrwm=43.0V, Ipp=6.52A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YV	-	TV05A430JB-G	TVS	Vbr=47.8..52.8V, Vrwm=43.0V, Ipp=7.20A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YW	-	TV05A450KB-G	TVS	Vbr=50.0..61.1V, Vrwm=45.0V, Ipp=6.23A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YX	-	TV05A450JB-G	TVS	Vbr=50.0..55.3V, Vrwm=45.0V, Ipp=6.88A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YY	-	TV05A480KB-G	TVS	Vbr=53.3..65.1V, Vrwm=48.0V, Ipp=5.85A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5YZ	-	TV05A480JB-G	TVS	Vbr=53.3..58.9V, Vrwm=48.0V, Ipp=6.46A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5Z	-	BZT52B3V9S	Zener diode	3.82..3.98V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1a	Tsc
5Z	-	MM1Z39	Zener diode	39V±5%, Izt=2.5mA, Zzt=100Ω, 500mW	SOD-123FL	7d	1a	Eic
5Z	-	MM3Z3V9B	Zener diode	3.82..3.98V, Zzt=84Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
5Z	-	MM3Z3V9BW	Zener diode	3.82..3.98V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1a	Tac
5Z	-	MM5Z47V	Zener diode	44..50V, Zzt=170Ω, Izt=2mA, 200mW	SOD-523FL	7d	1a	F
5Z	-	TCBZX584C47V	Zener diode	44..50V, Izt=2mA, Zzt=170Ω, 200mW	SOD-523FL	7d	1a	Tac
5Z	-	TCMM3Z3V9B	Zener diode	3.9V±2%, Izt=5mA, Zzt=84Ω, 200mW	SOD-323FL	7d	1a	Tac
5Z	-	TCMM5Z47V	Zener diode	44..50V, Izt=2mA, Zzt=170Ω, 200mW	SOD-523FL	7d	1a	Tac
5Z1	-	MM1Z2B7H	Zener diode	2.646..2.754V, Izt=5mA, Zzt=110Ω, 500mW	SOD-123	5d	1a	Zow
5ZD	-	TV05A510KB-G	TVS	Vbr=56.7..69.3V, Vrwm=51.0V, Ipp=5.49A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZE	-	TV05A510JB-G	TVS	Vbr=56.7..62.7V, Vrwm=51.0V, Ipp=6.07A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZF	-	TV05A540KB-G	TVS	Vbr=60.0..73.3V, Vrwm=54.0V, Ipp=5.19A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZG	-	TV05A540JB-G	TVS	Vbr=60.0..66.3V, Vrwm=54.0V, Ipp=5.74A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZH	-	TV05A580KB-G	TVS	Vbr=64.4..78.7V, Vrwm=58.0V, Ipp=4.85A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZK	-	TV05A580JB-G	TVS	Vbr=64.4..71.2V, Vrwm=58.0V, Ipp=5.34A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZL	-	TV05A600KB-G	TVS	Vbr=66.7..81.5V, Vrwm=60.0V, Ipp=4.67A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZM	-	TV05A600JB-G	TVS	Vbr=66.7..73.7V, Vrwm=60.0V, Ipp=5.17A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZN	-	TV05A640KB-G	TVS	Vbr=71.1..86.9V, Vrwm=64.0V, Ipp=4.39A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZP	-	TV05A640JB-G	TVS	Vbr=71.1..78.6V, Vrwm=64.0V, Ipp=4.85A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZQ	-	TV05A700KB-G	TVS	Vbr=77.8..95.1V, Vrwm=70.0V, Ipp=4.0A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZR	-	TV05A700JB-G	TVS	Vbr=77.8..86.0V, Vrwm=70.0V, Ipp=4.42A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZS	-	TV05A750KB-G	TVS	Vbr=83.3..102V, Vrwm=75.0V, Ipp=3.73A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZT	-	TV05A750JB-G	TVS	Vbr=83.3..92.1V, Vrwm=75.0V, Ipp=4.13A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZU	-	TV05A780KB-G	TVS	Vbr=86.7..106V, Vrwm=78.0V, Ipp=3.60A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZV	-	TV05A780JB-G	TVS	Vbr=86.7..95.8V, Vrwm=78.0V, Ipp=3.97A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZW	-	TV05A800KB-G	TVS	Vbr=89.0..109V, Vrwm=80.0V, Ipp=3.49A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZX	-	TV05A800JB-G	TVS	Vbr=88.8..97.6V, Vrwm=80.0V, Ipp=3.86A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZY	-	TV05A850KB-G	TVS	Vbr=94.4..115V, Vrwm=85.0V, Ipp=3.31A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
5ZZ	-	TV05A850JB-G	TVS	Vbr=94.4..104V, Vrwm=85.0V, Ipp=3.65A, 500W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
6	-	1SS400PT	Si-diode	Sw, 90V, 100mA, Vf<1.2V(100mA), 4ns	SOD-523	6d	1a	Chm
6	-	BAS16-02V	Si-diode	Sw, Fast, 80V, 200mA, 250mW, <6ns	SC-79	6d	1u	Inf
6	-	BAS516	Si-diode	Sw, 85V, 250mA, 500mW, Vf<1.25V(150mA), <4ns	SOD-523	6d	1a	Nxp
6	-	BD4148FGP	Si-diode	Sw, 75V, 150mA, Vf<1V(10mA), 4ns	SOD-523	6d	1a	Chm
6	-	GBLC15	TVS	Vrwm=15V, 10A, 350W(1ms), 3pF	SOD-323	5d	1a	Prt
6	-	HVU351	C-diode	VCO, 10V, 14..16pF(2V)	SOD-323	5d	1a	Ren
6	-	MAZS062	Zener diode	5.8..6.6V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
6	-	MM9D6V2	Zener diode	5.89..6.51V, Izt=5mA, Zzt=60Ω, 200mW	SOD-923	7d	1a	Wtr
6	-	MMBD4448FPT	Si-diode	Sw, 80V, 250mA, Vf<1V(100mA), 4ns	SOD-523	6d	1a	Chm
6	-	MMPZ5227SPT	Zener diode	3.528..3.762V, Izt=5mA, Zzt=90Ω, 225mW	SOD-323	5d	1a	Chm
6	-	NZ9F3V6ST	Zener diode	3.6..3.85V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1n	Ons
6	-	NZ9F6V2T	Zener diode	5.89..6.51V, Izt=5mA, Zzt=60Ω, 200mW	SOD-923	7d	1a	Ons

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
6	bc	BBY56-03W	C-diode	VCO-tuning, 10V, 20mA, 59..67pF(3..1V)	SOD-323	5d	2	Inf
6-	-	MAZS0620M	Zener diode	6.05..6.36V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
6.0	-	SMBG6.0	TVS	Vrwm=6.0V, Vbr=6.67..8.45V, 52.6A, 600W(1ms)	DO-215AA	5d	1a	Msc
6.0A	-	1SMC6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 145.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
6.0A	-	MMF6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, Ipp=19.4A, 200W(1ms)	SOD-123FL	7d	2m	Sst
6.0A	-	SMAJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 38.8A, 400W(1ms)	DO-214AC	1d	1a	Sus
6.0A	-	SMBG6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, 58.3A, 600W(1ms)	DO-215AA	5d	1a	Msc
6.0A	-	SMBJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, 58.3A, 600W(1ms)	DO-214AA	1d	1a	Sus
6.0A	-	SMCJ6.0A	TVS	Vrwm=6V, Vbr=6.67..7.67V, 131.6A, 1500W(1ms)	DO-214AB	1d	1k	Sus
6.0A	-	SMF6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, Ipp=19.4A, 200W(1ms)	SOD-123FL	7d	1a	Mco
6.0C	-	SMBG6.0C	TVS	Vrwm=6.0V, Vbr=6.67..8.45V, 52.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
6.0CA	-	1SMC6.0CA	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 145.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
6.0CA	-	MMF6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, Ipp=19.4A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
6.0CA	-	SMAJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 38.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
6.0CA	-	SMBG6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, 58.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
6.0CA	-	SMBJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, 58.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
6.0CA	-	SMCJ6.0CA	TVS	Vrwm=6V, Vbr=6.67..7.67V, 131.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
6.0CA	-	SMF6.0CA	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, Ipp=19.4A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
6.0G	-	ZD6.0G-CA2	Zener diode	6.0V±5%, Zzt=60Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
6.0G	-	ZD6.0G-CB2	Zener diode	6.0V±5%, Zzt=60Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
6.0L	-	ZD6.0L-CA2	Zener diode	6.0V±5%, Zzt=60Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
6.0L	-	ZD6.0L-CB2	Zener diode	6.0V±5%, Zzt=60Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
6.2	-	MAZ5062	Zener diode	5.8..6.6V, Zzt=6Ω(5mA), 500mW	MP2	11d	1a	Pan
6.2	-	MAZ80620H	Zener diode	6.24..6.56V, Zzt=30Ω(5mA), 150mW	SC-76	6d	1a	Pan
6.2	-	MAZY062	Zener diode	5.6..6.8V, Zzt=40Ω(20mA), 1W	NMiniP2	1d	1a	Pan
6.2B	-	HZF6.2BP	Zener diode	6.2V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
6.2B	-	PTZ6.2B	Zener diode	6.2V±10%, Izt=40mA, 1W	DO-214AC	1d	1a	Rhm
6.2C	-	HZF6.2CP	Zener diode	6.2V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
6.2G	-	ZD6.2G-CA2	Zener diode	6.2V±5%, Zzt=60Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
6.2G	-	ZD6.2G-CB2	Zener diode	6.2V±5%, Zzt=60Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
6.2L	-	ZD6.2L-CA2	Zener diode	6.2V±5%, Zzt=60Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
6.2L	-	ZD6.2L-CB2	Zener diode	6.2V±5%, Zzt=60Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
6.5	-	SMBG6.5	TVS	Vrwm=6.5V, Vbr=7.22..9.14V, 48.7A, 600W(1ms)	DO-215AA	5d	1a	Msc
6.5A	-	1SMC6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 133.9A, 1500W(1ms)	DO-214AB	1d	1a	Eic
6.5A	-	MMF6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, Ipp=17.9A, 200W(1ms)	SOD-123FL	7d	2m	Sst
6.5A	-	SMAJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 35.7A, 400W(1ms)	DO-214AC	1d	1a	Sus
6.5A	-	SMBG6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms)	DO-215AA	5d	1a	Msc
6.5A	-	SMBJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms)	DO-214AA	1d	1a	Sus
6.5A	-	SMCJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.3V, 122A, 1500W(1ms)	DO-214AB	1d	1k	Sus
6.5A	-	SMF6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, Ipp=17.9A, 200W(1ms)	SOD-123FL	7d	1a	Mco
6.5C	-	SMBG6.5C	TVS	Vrwm=6.5V, Vbr=7.22..9.14V, 48.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
6.5CA	-	1SMC6.5CA	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 133.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
6.5CA	-	MMF6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, Ipp=17.9A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
6.5CA	-	SMAJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 35.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
6.5CA	-	SMBG6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
6.5CA	-	SMBJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
6.5CA	-	SMCJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.3V, 122A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
6.5CA	-	SMF6.5CA	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, Ipp=17.9A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
6.8	-	MAZ5068	Zener diode	6.4..7.2V, Zzt=6Ω(5mA), 500mW	MP2	11d	1a	Pan
6.8	-	MAZ80680H	Zener diode	6.85..7.2V, Zzt=20Ω(5mA), 150mW	SC-76	6d	1a	Pan
6.8	-	MAZY068	Zener diode	6.2..7.4V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
6.8	-	P4SMA6.8	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 38.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
6.8	-	U1ZB6.8	Zener diode	6.2..7.4V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos
6.8A	-	P4SMA6.8A	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 40.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
6.8A	-	P6SMB6.8A	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 57.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6.8B	-	HZF6.8BP	Zener diode	6.8V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
6.8B	-	PTZ6.8B	Zener diode	6.8V±10%, Izt=40mA, 1W	DO-214AC	1d	1a	Rhm
6.8C	-	HZF6.8CP	Zener diode	6.8V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
6.8C	-	P4SMA6.8C	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 38.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
6.8CA	-	P4SMA6.8CA	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 40.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
6.8CA	-	P6SMB6.8CA	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 57.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6.8G	-	ZD6.8G-CA2	Zener diode	6.8V±5%, Zzt=40Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
6.8G	-	ZD6.8G-CB2	Zener diode	6.8V±5%, Zzt=40Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
6.8L	-	ZD6.8L-CA2	Zener diode	6.8V±5%, Zzt=40Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
6.8L	-	ZD6.8L-CB2	Zener diode	6.8V±5%, Zzt=40Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
6/6	bq	SD12C	TVS	Vrwm=12.0V, Vbr=13.3..19V, Ipp=15A, 350W(1ms), Bidir.	SOD-323	5ba	1e	Smt
6^	-	MAZS0620H	Zener diode	6.24..6.56V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
6^2	-	MAZ80620H	Zener diode	6.24..6.56V, Zzt=30Ω(5mA), 150mW	SC-76	6d	1a	Pan
6^2	-	MAZ8062GHL	Zener diode	6.24..6.56V, Zzt=30Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
6^8	-	MAZ80680H	Zener diode	6.85..7.2V, Zzt=20Ω(5mA), 150mW	SC-76	6d	1a	Pan

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
6^8	-	MAZ8068GHL	Zener diode	6.85..7.2V, Zzt=20Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
6_	-	MAZS0620L	Zener diode	5.85..6.15V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
6_2	-	MAZ80620L	Zener diode	5.85..6.15V, Zzt=30Ω(5mA), 150mW	SC-76	6d	1a	Pan
6_2	-	MAZ8062GLL	Zener diode	5.85..6.15V, Zzt=30Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
6_8	-	MAZ80680L	Zener diode	6.44..6.77V, Zzt=20Ω(5mA), 150mW	SC-76	6d	1a	Pan
6_8	-	MAZ8068GLL	Zener diode	6.44..6.77V, Zzt=20Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
6•2	-	RKZ6.2B2KG	Zener diode	6.06..6.33V, Izt=5mA, Zzt=50Ω, 200mW	URP	5d	2e	Ren
6•2	-	RKZ6.2B2KJ	Zener diode	6.06..6.33V, Izt=5mA, Zzt=50Ω, 150mW	UFP	7d	2e	Ren
6•2	am	HZU6.2B3	Zener diode	6.26..6.53V, Izt=5mA, Zzt=50Ω, 200mW	URP	5d	1a	Ren
6•2	an	HZU6.2B2	Zener diode	6.06..6.33V, Izt=5mA, Zzt=50Ω, 200mW	URP	5d	1a	Ren
6•2	ao	HZU6.2B1	Zener diode	5.86..6.12V, Izt=5mA, Zzt=50Ω, 200mW	URP	5d	1a	Ren
6•8	-	RKZ6.8B2KG	Zener diode	6.65..6.93V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	2e	Ren
6•8	-	RKZ6.8B2KJ	Zener diode	6.65..6.93V, Izt=5mA, Zzt=30Ω, 150mW	UFP	7d	2e	Ren
6•8	am	HZU6.8B3	Zener diode	6.86..7.14V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
6•8	an	HZU6.8B2	Zener diode	6.65..6.93V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
6•8	ao	HZU6.8B1	Zener diode	6.47..6.73V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
60	-	BAT60J	Si-diode	SBD, Fast-Sw, 10V, 3A, Vf<0.3V(1A), 20pF	SOD-323	5d	1a	Ste
60	-	HMSZ5260B	Zener diode	43V±5%, Izt=3mA, Zzt=93Ω, 225mW	SOD-323	5d	1d	Hsn
60	-	MMPZ5264SPT	Zener diode	58.80..61.20V, Izt=2.1mA, Zzt=170Ω, 225mW	SOD-323	5d	1a	Chm
60	-	SMBG60	TVS	Vrwm=60V, Vbr=66.7..84.5V, 5.6A, 600W(1ms)	DO-215AA	5d	1a	Msc
600A	-	P6SMA600A	TVS	Vbr=570..630V, Vrwm=510V, 0.76A, 600W(1ms)	DO-214AC	1d	1a	Eic
600A	-	TVP04A601A-G	TVS	Vbr=570.0..630.0V, Vrwm=513.0V, Ipp=0.48A, 400W(1ms)	DO-214AC	1d	2o	Cmc
600A	-	TVP06B601A-G	TVS	Vrwm=513.0V, Vbr=570.0..630.0V, Ipp=0.72A, 600W(1ms)	DO-214AA	1d	2o	Cmc
600C	-	TVP04A601CA-G	TVS	Vbr=570.0..630.0V, Vrwm=513.0V, Ipp=0.48A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
600C	-	TVP06B601ACA-G	TVS	Vrwm=513.0V, Vbr=570.0..630.0V, Ipp=0.72A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
600CA	-	P6SMA600CA	TVS	Vbr=570..630V, Vrwm=510V, 0.76A, 600W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
6010	-	SMBJ8.5	TVS	Vrwm=8.5V, Vbr=9.44..11.92V, 37.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
6010	-	SMBJ8.5C	TVS	Vrwm=8.5V, Vbr=9.44..11.92V, 37.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6010	-	STB6010	TVS	Vbr=9.00..11.0V, Vrwm=8.10V, 40.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6010	-	STU6010	TVS	Vbr=9.00..11.0V, Vrwm=8.10V, 40.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6010	-	SZ6010	Zener diode	10V±10%, Izt=125mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Eic
6011	-	SMBJ9.0	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6011	-	SMBJ9.0C	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6011	-	STB6011	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 37.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6011	-	STU6011	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 37.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6011	-	SZ6011	Zener diode	11V±10%, Izt=125mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
6012	-	SMBJ10	TVS	Vrwm=10V, Vbr=11.1..14.1V, 31.9A, 600W(1ms)	DO-214AA	1d	1a	Eic
6012	-	SMBJ10C	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms)	DO-214AA	1ba	1j	Eic
6012	-	STB6012	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 35.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6012	-	STU6012	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 35.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6012	-	SZ6012	Zener diode	12V±10%, Izt=100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
6013	-	SMBJ11	TVS	Vrwm=11V, Vbr=12.2..15.4V, 29.9A, 600W(1ms)	DO-214AA	1d	1a	Eic
6013	-	SMBJ11C	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6013	-	STB6013	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 32.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6013	-	STU6013	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 32.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6013	-	SZ6013	Zener diode	13V±10%, Izt=100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
6014	-	SMBJ12	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6014	-	SMBJ12C	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6014	-	SZ6014	Zener diode	14V±10%, Izt=100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
6015	-	SMBJ13	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
6015	-	SMBJ13C	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6015	-	STB6015	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, 27.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6015	-	STU6015	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, 27.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6015	-	SZ6015	Zener diode	15V±10%, Izt=75mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
6016	-	STB6016	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 26.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6016	-	STU6016	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 26.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6016	-	SZ6016	Zener diode	16V±10%, Izt=75mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
6017	-	SMBJ14	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6017	-	SMBJ14C	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6017	-	SZ6017	Zener diode	17V±10%, Izt=70mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
6018	-	SMBJ15	TVS	Vrwm=15V, Vbr=16.7..21.1V, 22.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6018	-	SMBJ15C	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6018	-	STB6018	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 23.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6018	-	STU6018	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 23.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6018	-	SZ6018	Zener diode	18V±10%, Izt=65mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
6019	-	SMBJ16	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
6019	-	SMBJ16C	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6019	-	SZ6019	Zener diode	19V±10%, Izt=65mA, Zzt=3Ω, 5W	DO-214AA	1d	1a	Eic
6020	-	SMBJ17	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
6020	-	SMBJ17C	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
6020	-	STB6020	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 21.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6020	-	STU6020	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 21.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6020	-	SZ6020	Zener diode	20V±10%, Izt=65mA, Zzt=3Ω, 5W	DO-214AA	1d	1a	Eic
6022	-	SMBJ18	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
6022	-	SMBJ18C	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6022	-	STB6022	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 19.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6022	-	STU6022	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 19.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6022	-	SZ6022	Zener diode	22V±10%, Izt=50mA, Zzt=3.5Ω, 5W	DO-214AA	1d	1a	Eic
6024	-	SMBJ20	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
6024	-	SMBJ20C	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6024	-	STB6024	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 17.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6024	-	STU6024	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 17.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6024	-	SZ6024	Zener diode	24V±10%, Izt=50mA, Zzt=3.5Ω, 5W	DO-214AA	1d	1a	Eic
6025	-	SZ6025	Zener diode	25V±10%, Izt=50mA, Zzt=4Ω, 5W	DO-214AA	1d	1a	Eic
6026	-	SMBJ22	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
6026	-	SMBJ22C	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6027	-	STB6027	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 15.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6027	-	STU6027	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 15.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6027	-	SZ6027	Zener diode	27V±10%, Izt=50mA, Zzt=5Ω, 5W	DO-214AA	1d	1a	Eic
6028	-	SZ6028	Zener diode	28V±10%, Izt=50mA, Zzt=6Ω, 5W	DO-214AA	1d	1a	Eic
6029	-	SMBJ24	TVS	Vrwm=24V, Vbr=26.7..33.8V, 14.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6029	-	SMBJ24C	TVS	Vbr=26.7..32.6V, 14.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6030	-	STB6030	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 14.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6030	-	STU6030	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 14.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6030	-	SZ6030	Zener diode	30V±10%, Izt=40mA, Zzt=8Ω, 5W	DO-214AA	1d	1a	Eic
6031	-	SMBJ26	TVS	Vrwm=26V, Vbr=28.9..36.6V, 12.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
6031	-	SMBJ26C	TVS	Vrwm=26V, Vbr=28.9..36.6V, 12.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6033	-	SMBJ28	TVS	Vrwm=28V, Vbr=31.1..39.4V, 12.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6033	-	SMBJ28C	TVS	Vrwm=28V, Vbr=31.1..39.4V, 12.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6033	-	STB6033	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 12.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6033	-	STU6033	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 12.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
6033	-	SZ6033	Zener diode	33V±10%, Izt=40mA, Zzt=10Ω, 5W	DO-214AA	1d	1a	Eic
6036	-	SMBJ30	TVS	Vrwm=30V, Vbr=33.3..42.2V, 11.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
6036	-	SMBJ30C	TVS	Vrwm=30V, Vbr=33.3..42.2V, 11.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6036	-	STB6036	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 11.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6036	-	STU6036	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 11.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
6036	-	SZ6036	Zener diode	36V±10%, Izt=30mA, Zzt=11Ω, 5W	DO-214AA	1d	1a	Eic
6039	-	STB6039	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 10.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6039	-	STU6039	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 10.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
6039	-	SZ6039	Zener diode	39V±10%, Izt=30mA, Zzt=14Ω, 5W	DO-214AA	1d	1a	Eic
603D	-	SZ603D	Zener diode	3.3V±10%, Izt=380mA, Zzt=3Ω, 5W	DO-214AA	1d	1a	Eic
603G	-	SZ603G	Zener diode	3.6V±10%, Izt=350mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
603J	-	SZ603J	Zener diode	3.9V±10%, Izt=320mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Eic
6040	-	SMBJ33	TVS	Vrwm=33V, Vbr=36.7..46.5V, 10.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
6040	-	SMBJ33C	TVS	Vrwm=33V, Vbr=36.7..46.5V, 10.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6043	-	SMBJ36	TVS	Vrwm=36V, Vbr=40.0..50.7V, 9.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6043	-	SMBJ36C	TVS	Vrwm=36V, Vbr=40.0..50.7V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6043	-	STB6043	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 9.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6043	-	STU6043	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 9.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
6043	-	SZ6043	Zener diode	43V±10%, Izt=30mA, Zzt=20Ω, 5W	DO-214AA	1d	1a	Eic
6047	-	STB6047	TVS	Vbr=42.3..51.7V, Vrwm=38.1V, 8.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6047	-	STU6047	TVS	Vbr=42.3..51.7V, Vrwm=38.1V, 8.9A, 600W(1ms)	DO-214AA	1d	1a	Eic
6047	-	SZ6047	Zener diode	47V±10%, Izt=25mA, Zzt=25Ω, 5W	DO-214AA	1d	1a	Eic
6048	-	SMBJ40	TVS	Vrwm=40V, Vbr=44.4..56.3V, 8.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
6048	-	SMBJ40C	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
604D	-	SZ604D	Zener diode	4.3V±10%, Izt=290mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Eic
604H	-	SZ604H	Zener diode	4.7V±10%, Izt=260mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Eic
6051	-	SMBJ43	TVS	Vrwm=43V, Vbr=47.8..60.5V, 7.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
6051	-	SMBJ43C	TVS	Vrwm=43V, Vbr=47.8..60.5V, 7.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6051	-	STB6051	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 8.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6051	-	STU6051	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 8.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
6051	-	SZ6051	Zener diode	51V±10%, Izt=25mA, Zzt=27Ω, 5W	DO-214AA	1d	1a	Eic
6054	-	SMBJ45	TVS	Vrwm=45V, Vbr=50.0..63.3V, 7.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
6054	-	SMBJ45C	TVS	Vrwm=45V, Vbr=50.0..63.3V, 7.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6056	-	STB6056	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 7.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6056	-	STU6056	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 7.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
6056	-	SZ6056	Zener diode	56V±10%, Izt=20mA, Zzt=35Ω, 5W	DO-214AA	1d	1a	Eic
6057	-	SMBJ48	TVS	Vrwm=48V, Vbr=53.3..67.5V, 7.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6057	-	SMBJ48C	TVS	Vrwm=48V, Vbr=53.3..67.5V, 7.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
605B	-	SZ605B	Zener diode	5.1V±10%, Izt=240mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1a	Eic



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
605G	-	SZ605G	Zener diode	5.6V±10%, Izt=220mA, Zzt=1Ω, 5W	DO-214AA	1d	1a	Eic
6060	-	SZ6060	Zener diode	60V±10%, Izt=20mA, Zzt=40Ω, 5W	DO-214AA	1d	1a	Eic
6061	-	SMBJ51	TVS	Vrwm=51V, Vbr=56.7..71.8V, 6.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
6061	-	SMBJ51C	TVS	Vrwm=51V, Vbr=56.7..71.8V, 6.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6062	-	STB6062	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 6.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6062	-	STU6062	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 6.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
6062	-	SZ6062	Zener diode	62V±10%, Izt=20mA, Zzt=42Ω, 5W	DO-214AA	1d	1a	Eic
6065	-	SMBJ54	TVS	Vrwm=54V, Vbr=60.0..76.0V, 6.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
6065	-	SMBJ54C	TVS	Vrwm=54V, Vbr=60.0..76.0V, 6.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6068	-	STB6068	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 6.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6068	-	STU6068	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 6.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
6068	-	SZ6068	Zener diode	68V±10%, Izt=20mA, Zzt=44Ω, 5W	DO-214AA	1d	1a	Eic
606A	-	SZ606A	Zener diode	6.0V±10%, Izt=200mA, Zzt=1Ω, 5W	DO-214AA	1d	1a	Eic
606C	-	SZ606C	Zener diode	6.2V±10%, Izt=200mA, Zzt=1Ω, 5W	DO-214AA	1d	1a	Eic
606I	-	SMBJ5.0	TVS	Vrwm=5.0V, Vbr=6.40..7.55V, 62.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
606I	-	SMBJ5.0C	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
606I	-	STB606I	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 55.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
606I	-	STU606I	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 55.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
606I	-	SZ606I	Zener diode	6.8V±10%, Izt=175mA, Zzt=1Ω, 5W	DO-214AA	1d	1a	Eic
6070	-	SMBJ58	TVS	Vrwm=58V, Vbr=64.4..81.6V, 5.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
6070	-	SMBJ58C	TVS	Vrwm=58V, Vbr=64.4..81.6V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6072	-	SMBJ60	TVS	Vrwm=60V, Vbr=66.7..84.5V, 5.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
6072	-	SMBJ60C	TVS	Vrwm=60V, Vbr=66.7..84.5V, 5.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6075	-	STB6075	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 5.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6075	-	STU6075	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 5.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
6075	-	SZ6075	Zener diode	75V±10%, Izt=20mA, Zzt=45Ω, 5W	DO-214AA	1d	1a	Eic
6076	-	SMBJ64	TVS	Vrwm=64V, Vbr=71.1..90.1V, 5.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6076	-	SMBJ64C	TVS	Vrwm=64V, Vbr=71.1..90.1V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
607C	-	SMBJ6.0	TVS	Vrwm=6.0V, Vbr=6.67..8.45V, 52.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
607C	-	SMBJ6.0C	TVS	Vrwm=6.0V, Vbr=6.67..8.45V, 52.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
607F	-	STB607F	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 51.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
607F	-	STU607F	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 51.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
607F	-	SZ607F	Zener diode	7.5V±10%, Izt=175mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1a	Eic
607I	-	SMBJ6.5	TVS	Vrwm=6.5V, Vbr=7.22..9.14V, 48.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
607I	-	SMBJ6.5C	TVS	Vrwm=6.5V, Vbr=7.22..9.14V, 48.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6082	-	STB6082	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 5.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6082	-	STU6082	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 5.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
6082	-	SZ6082	Zener diode	82V±10%, Izt=15mA, Zzt=65Ω, 5W	DO-214AA	1d	1a	Eic
6084	-	SMBJ70	TVS	Vrwm=70V, Vbr=77.8..98.6V, 4.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
6084	-	SMBJ70C	TVS	Vrwm=70V, Vbr=77.8..98.6V, 4.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6087	-	SZ6087	Zener diode	87V±10%, Izt=15mA, Zzt=75Ω, 5W	DO-214AA	1d	1a	Eic
608C	-	STB608C	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 48.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
608C	-	STU608C	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 48.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
608C	-	SZ608C	Zener diode	8.2V±10%, Izt=150mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1a	Eic
608E	-	SMBJ7.0	TVS	Vrwm=7.0V, Vbr=7.78..9.86V, 45.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
608E	-	SMBJ7.0C	TVS	Vrwm=7.0V, Vbr=7.78..9.86V, 45.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
608H	-	SZ608H	Zener diode	8.7V±10%, Izt=150mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Eic
6090	-	SMBJ75	TVS	Vrwm=75V, Vbr=83.3..105.7V, 4.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
6090	-	SMBJ75C	TVS	Vrwm=75V, Vbr=83.3..105.7V, 4.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6091	-	STB6091	TVS	Vbr=81.9..100V, Vrwm=73.7V, 4.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6091	-	STU6091	TVS	Vbr=81.9..100V, Vrwm=73.7V, 4.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
6091	-	SZ6091	Zener diode	91V±10%, Izt=15mA, Zzt=75Ω, 5W	DO-214AA	1d	1a	Eic
6093	-	SMBJ78	TVS	Vrwm=58V, Vbr=86.7..109.8V, 4.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6093	-	SMBJ78C	TVS	Vrwm=58V, Vbr=86.7..109.8V, 4.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
609A	-	SMBJ7.5	TVS	Vrwm=7.5V, Vbr=8.33..10.67V, 42.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
609A	-	SMBJ7.5C	TVS	Vrwm=7.5V, Vbr=8.33..10.67V, 42.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
609B	-	STB609B	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 44.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
609B	-	STU609B	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 44.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
609B	-	SZ609B	Zener diode	9.1V±10%, Izt=150mA, Zzt=2Ω, 5W	DO-214AA	1d	1a	Eic
609G	-	SMBJ8.0	TVS	Vrwm=8.0V, Vbr=8.89..11.3V, 40.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
609G	-	SMBJ8.0C	TVS	Vrwm=8.0V, Vbr=8.89..11.3V, 40.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60A	-	1SMC60A	TVS	Vbr=66.7..73.7V, Vrwm=60V, 15.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
60A	-	MMF60A	TVS	Vrwm=60V, Vbr=66.7..76.7V, Ipp=1.8A, 200W(1ms)	SOD-123FL	7d	2m	Sst
60A	-	SMAJ60A	TVS	Vrwm=60V, Vbr=66.7..73.7V, 4.1A, 400W(1ms)	DO-214AC	1d	1a	Sus
60A	-	SMBG60A	TVS	Vrwm=60V, Vbr=66.7..76.7V, 6.2A, 600W(1ms)	DO-215AA	5d	1a	Msc
60A	-	SMBJ60A	TVS	Vrwm=60V, Vbr=66.7..76.7V, 6.2A, 600W(1ms)	DO-214AA	1d	1a	Sus
60A	-	SMCJ60A	TVS	Vrwm=60V, Vbr=66.7..76.7V, 14A, 1500W(1ms)	DO-214AB	1d	1k	Sus
60A	-	SMF60A	TVS	Vbr=66.7..73.7V, Vrwm=60V, Ipp=1.8A, 200W(1ms)	SOD-123FL	7d	1a	Mco
60A	-	UMA60A	TVS	Vrwm=60V, Vbr=66.7..96.8V, 5.2A, 500W(1ms)	UltraMite	14d	1v	Msc
60B	-	MMHZ5260BPT	Zener diode	40.85..45.15V, Izt=3.0mA, Zzt=93Ω, 225mW	SOD-123	5d	1a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
60B	-	SMC5360B	Zener diode	25.0V±5%, Zzt=4.0(50.0mA), Izm=190.0mA, 5W	DO-214AB	1d	1a	Ers
60B0	-	SMBJ85	TVS	Vrwm=85V, Vbr=94.4..119.2V, 3.9A, 600W(1ms)	DO-214AA	1d	1a	Eic
60B0	-	SMBJ85C	TVS	Vrwm=85V, Vbr=94.4..119.2V, 3.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60B0	-	STB60B0	TVS	Vbr=90.0..110V, Vrwm=81.0V, 4.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60B0	-	STU60B0	TVS	Vbr=90.0..110V, Vrwm=81.0V, 4.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
60B0	-	SZ60B0	Zener diode	100V±10%, Izt=12mA, Zzt=90Ω, 5W	DO-214AA	1d	1a	Eic
60B1	-	SMBJ90	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
60B1	-	SMBJ90C	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60B1	-	STB60B1	TVS	Vbr=99.0..121V, Vrwm=89.2V, 3.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60B1	-	STU60B1	TVS	Vbr=99.0..121V, Vrwm=89.2V, 3.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
60B1	-	SZ60B1	Zener diode	110V±10%, Izt=12mA, Zzt=125Ω, 5W	DO-214AA	1d	1a	Eic
60B2	-	SMBJ100	TVS	Vrwm=100V, Vbr=111..141.0V, 3.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
60B2	-	SMBJ100C	TVS	Vrwm=100V, Vbr=111..128V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60B2	-	STB60B2	TVS	Vbr=108..132V, Vrwm=97.2V, 3.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60B2	-	STU60B2	TVS	Vbr=108..132V, Vrwm=97.2V, 3.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
60B2	-	SZ60B2	Zener diode	120V±10%, Izt=10mA, Zzt=170Ω, 5W	DO-214AA	1d	1a	Eic
60B3	-	SMBJ110	TVS	Vrwm=110V, Vbr=122..154.5V, 3.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
60B3	-	SMBJ110C	TVS	Vrwm=110V, Vbr=122..140.5V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60B3	-	STB60B3	TVS	Vbr=117..143V, Vrwm=106V, 3.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60B3	-	STU60B3	TVS	Vbr=117..143V, Vrwm=106V, 3.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
60B3	-	SZ60B3	Zener diode	130V±10%, Izt=10mA, Zzt=190Ω, 5W	DO-214AA	1d	1a	Eic
60B4	-	SMBJ120	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
60B4	-	SMBJ120C	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60B4	-	SZ60B4	Zener diode	140V±10%, Izt=8mA, Zzt=230Ω, 5W	DO-214AA	1d	1a	Eic
60B5	-	SMBJ130	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
60B5	-	SMBJ130C	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60B5	-	STB60B5	TVS	Vbr=135..165V, Vrwm=121V, 2.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60B5	-	STU60B5	TVS	Vbr=135..165V, Vrwm=121V, 2.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
60B5	-	SZ60B5	Zener diode	150V±10%, Izt=8mA, Zzt=330Ω, 5W	DO-214AA	1d	1a	Eic
60B6	-	STB60B6	TVS	Vbr=144..176V, Vrwm=130V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60B6	-	STU60B6	TVS	Vbr=144..176V, Vrwm=130V, 2.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
60B6	-	SZ60B6	Zener diode	160V±10%, Izt=8mA, Zzt=350Ω, 5W	DO-214AA	1d	1a	Eic
60B7	-	STB60B7	TVS	Vbr=153..187V, Vrwm=138V, 2.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60B7	-	STU60B7	TVS	Vbr=153..187V, Vrwm=138V, 2.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
60B7	-	SZ60B7	Zener diode	170V±10%, Izt=8mA, Zzt=380Ω, 5W	DO-214AA	1d	1a	Eic
60B8	-	SMBJ150	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
60B8	-	SMBJ150C	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60B8	-	STB60B8	TVS	Vbr=162..198V, Vrwm=146V, 2.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60B8	-	STU60B8	TVS	Vbr=162..198V, Vrwm=146V, 2.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
60B8	-	SZ60B8	Zener diode	180V±10%, Izt=5mA, Zzt=430Ω, 5W	DO-214AA	1d	1a	Eic
60B9	-	SMBJ160	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
60B9	-	SMBJ160C	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60B9	-	SZ60B9	Zener diode	190V±10%, Izt=5mA, Zzt=450Ω, 5W	DO-214AA	1d	1a	Eic
60C	-	SMBG60C	TVS	Vrwm=60V, Vbr=66.7..84.5V, 5.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
60CA	-	1SMC60CA	TVS	Vbr=66.7..73.7V, Vrwm=60V, 15.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
60CA	-	MMF60CA	TVS	Vrwm=60V, Vbr=66.7..76.7V, Ipp=1.8A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
60CA	-	SMAJ60CA	TVS	Vrwm=60V, Vbr=66.7..73.7V, 4.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
60CA	-	SMBG60CA	TVS	Vrwm=60V, Vbr=66.7..76.7V, 6.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
60CA	-	SMBJ60CA	TVS	Vrwm=60V, Vbr=66.7..76.7V, 6.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
60CA	-	SMCJ60CA	TVS	Vrwm=60V, Vbr=66.7..76.7V, 14A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
60CA	-	SMF60CA	TVS	Vbr=66.7..73.7V, Vrwm=60V, Ipp=1.8A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
60CA	-	UMA60CA	TVS	Vrwm=60V, Vbr=66.7..96.8V, 5.2A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
60D0	-	SMBJ170	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
60D0	-	SMBJ170C	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60D0	-	STB60D0	TVS	Vbr=180..220V, Vrwm=162V, 2.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60D0	-	STU60D0	TVS	Vbr=180..220V, Vrwm=162V, 2.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
60D0	-	SZ60D0	Zener diode	200V±10%, Izt=5mA, Zzt=480Ω, 5W	DO-214AA	1d	1a	Eic
60D1	-	SMBJ188C	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60D2	-	STB60D2	TVS	Vbr=198..242V, Vrwm=175V, 1.75A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60D2	-	STU60D2	TVS	Vbr=198..242V, Vrwm=175V, 1.75A, 600W(1ms)	DO-214AA	1d	1a	Eic
60D5	-	STB60D5	TVS	Vbr=225..275V, Vrwm=202V, 1.67A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60D5	-	STU60D5	TVS	Vbr=225..275V, Vrwm=202V, 1.67A, 600W(1ms)	DO-214AA	1d	1a	Eic
60DPH	-	BYG60D	Si-diode	Fast, Soft-recovery, 200V, 1A, Vf<0.98V(1A), 250ns	DO-214AC	1d	1a	Phi
60E0	-	STB60E0	TVS	Vbr=270..330V, Vrwm=243V, 1.40A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60E0	-	STU60E0	TVS	Vbr=270..330V, Vrwm=243V, 1.40A, 600W(1ms)	DO-214AA	1d	1a	Eic
60E5	-	STB60E5	TVS	Vbr=315..385V, Vrwm=284V, 1.20A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60E5	-	STU60E5	TVS	Vbr=315..385V, Vrwm=284V, 1.20A, 600W(1ms)	DO-214AA	1d	1a	Eic
60G0	-	STB60G0	TVS	Vbr=360..440V, Vrwm=324V, 1.05A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
60G0	-	STU60G0	TVS	Vbr=360..440V, Vrwm=324V, 1.05A, 600W(1ms)	DO-214AA	1d	1a	Eic
60G4	-	STB60G4	TVS	Vbr=396..484V, Vrwm=356V, 0.95A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
60G4	-	STU60G4	TVS	Vbr=396..484V, Vrwm=356V, 0.95A, 600W(1ms)	DO-214AA	1d	1a	Eic
60GPH	-	BYG60G	Si-diode	Fast, Soft-recovery, 400V, 1A, Vf<0.98V(1A), 250ns	DO-214AC	1d	1a	Phi
60JPH	-	BYG60J	Si-diode	Fast, Soft-recovery, 600V, 1A, Vf<0.98V(1A), 250ns	DO-214AC	1d	1a	Phi
60KPH	-	BYG60K	Si-diode	Fast, Soft-recovery, 800V, 1A, Vf<0.98V(1A), 350ns	DO-214AC	1d	1a	Phi
60MPH	-	BYG60M	Si-diode	Fast, Soft-recovery, 1000V, 1A, Vf<0.98V(1A), 350ns	DO-214AC	1d	1a	Phi
60S	-	MMHZ5260SPT	Zener diode	42.14..43.86V, Izt=3.0mA, Zzt=93Ω, 225mW	SOD-123	5d	1a	Chm
60V	-	SMA60	TVS	Vbr=66.7..81.5V, Vrwm=60.0V, 2.8A, 300W(1ms)	DO-214AC	1d	1a	Mic
60V	-	SMB60	TVS	Vbr=66.7..81.5V, Vrwm=60V, 5.6A, 600W(1ms)	DO-214AA	1d	1a	Mic
60V	-	SMC60	TVS	Vbr=66.7..81.5V, Vrwm=60V, 14A, 1500W(1ms),	DO-214AB	1d	1a	Mic
60VA	-	SMA60A	TVS	Vbr=66.7..73.7V, Vrwm=60.0V, 3.1A, 300W(1ms)	DO-214AC	1d	1a	Mic
60VA	-	SMB60A	TVS	Vbr=66.7..73.7V, Vrwm=60V, 6.2A, 600W(1ms)	DO-214AA	1d	1a	Mic
60VA	-	SMC60A	TVS	Vbr=66.7..73.7V, Vrwm=60V, 15.5A, 1500W(1ms),	DO-214AB	1d	1a	Mic
60VC	-	SMA60C	TVS	Vbr=66.7..81.5V, Vrwm=60.0V, 2.8A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
60VC	-	SMB60C	TVS	Vbr=66.7..81.5V, Vrwm=60V, 5.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
60VC	-	SMC60C	TVS	Vbr=66.7..81.5V, Vrwm=60V, 14A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
60VCA	-	SMA60CA	TVS	Vbr=66.7..73.7V, Vrwm=60.0V, 3.1A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
60VCA	-	SMB60CA	TVS	Vbr=66.7..73.7V, Vrwm=60V, 6.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
60VCA	-	SMC60CA	TVS	Vbr=66.7..73.7V, Vrwm=60V, 15.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
61	-	HMSZ5261B	Zener diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 225mW	SOD-323	5d	1d	Hsn
614	-	1PMT4614	Zener diode	1.8V±5%, Izt=262.4mA, 1W	DO-216	4d	1a	Msc
615	-	1PMT4615	Zener diode	2.0V±5%, Izt=240.6mA, 1W	DO-216	4d	1a	Msc
616	-	1PMT4616	Zener diode	2.2V±5%, Izt=218.7mA, 1W	DO-216	4d	1a	Msc
617	-	1PMT4617	Zener diode	2.4V±5%, Izt=207.8mA, 1W	DO-216	4d	1a	Msc
618	-	1PMT4618	Zener diode	2.7V±5%, Izt=196.8mA, 1W	DO-216	4d	1a	Msc
619	-	1PMT4619	Zener diode	3.0V±5%, Izt=190.3mA, 1W	DO-216	4d	1a	Msc
61B	-	MMHZ5261BPT	Zener diode	44.65..49.35V, Izt=2.7mA, Zzt=105Ω, 225mW	SOD-123	5d	1a	Chm
61B	-	SMC5361B	Zener diode	27.0V±5%, Zzt=5.0(50.0mA), Izm=176.0mA, 5W	DO-214AB	1d	1a	Ers
61S	-	MMHZ5261SPT	Zener diode	46.06..47.94V, Izt=2.7mA, Zzt=105Ω, 225mW	SOD-123	5d	1a	Chm
62	-	BAT62-02W	Si-diode	Schottky, 40V, 20mA; Vf<1.0V, Cd<0.6pF	SCD-80	6d	1u	Inf
62	-	CDZ55C62	Zener diode	58.90..65.10V, Zzt=150Ω, Izt=2.25mA, 500mW	1206	70d	2d	Crp
62	-	CDZ55C62S	Zener diode	58.90..65.10V, Zzt=150Ω, Izt=2.25mA, 500mW	0805	70d	2d	Crp
62	-	CDZ55C62T	Zener diode	58.90..65.10V, Zzt=150Ω, Izt=2.25mA, 200mW	0603	70d	2d	Crp
62	-	CZRNC55C62-G	Zener diode	58.90..65.10V, Zt=150Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
62	-	EDZ3.6B	Zener diode	3.60..3.845V, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Rhm
62	-	EDZV3.6B	Zener diode	3.60..3.845V, Izt=5.0mA, Zzt=100Ω, 150mW	SOD-523	6d	2v	Rhm
62	-	FDZ3.6EV	Zener diode	3.600..3.845V, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Fis
62	-	FDZ3.6VT	Zener diode	3.600..3.845V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Fis
62	-	GDZ3V6B-V	Zener diode	3.6..3.845V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	2m	Vs
62	-	HZC6.2	Zener diode	6.2V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
62	-	HZU6.2G	Zener diode	5.86..6.53V, Izt=5mA, 200mW	SOD-323	5d	1a	Ren
62	-	KDZ6.2EV	Zener diode	5.8..6.6V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
62	-	KDZ6.2V	Zener diode	5.8..6.6V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
62	-	LBZT52B3V6T1G	Zener diode	3.6..3.845V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
62	-	LEDZ3.6BT1G	Zener diode	3.6..3.845V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
62	-	LUDZS3.6BT1G	Zener diode	3.6..3.845V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
62	-	MMPZ5265SPT	Zener diode	60.76..63.24V, Izt=2mA, Zzt=185Ω, 225mW	SOD-323	5d	1a	Chm
62	-	P4SMA62	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 4.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
62	-	P6SMBJ62	TVS	Vrwm=62V, Vbr=55.8..68.2V, 6.8A, 600W(1ms)	DO-214AA	1d	1n	Lif
62	-	SML4759	Zener diode	62V±5%, Izt=4mA, Zzt=125Ω, 1W	DO-214AC	1d	1k	Vs
62	-	TDZ3.6B	Zener diode	3.6V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
62	-	TZD6.2WS	Zener diode	5.80..6.60V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Ttr
62	-	TZD6.2WT	Zener diode	5.80..6.60V, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Ttr
62	-	UDZS3.6B	Zener diode	3.60..3.84V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Wtr
62	-	UDZS3.6B	Zener diode	3.6V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
62	-	UDZV3.6B	Zener diode	3.60..3.845V, Izt=5.0mA, Zzt=100Ω, 200mW	SOD-323	5d	2v	Rhm
62	-	USFZ6.2V	Zener diode	6.2V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
62	-	VDZS3.6B	Zener diode	3.6V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
62	ax	CRY62	Zener diode	5.6..6.8V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
6-2	-	MAZ80620M	Zener diode	6.05..6.36V, Zzt=30Ω(5mA), 150mW	SC-76	6d	1a	Pan
6-2	-	MAZ8062GML	Zener diode	6.05..6.36V, Zzt=30Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
62•	-	TZD6.2YWS	Zener diode	6.06..6.33V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Ttr
62•	-	TZD6.2YWT	Zener diode	6.06..6.33V, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Ttr
620	-	1PMT4620	Zener diode	3.3V±5%, Izt=185.9mA, 1W	DO-216	4d	1a	Msc
621	-	1PMT4621	Zener diode	3.6V±5%, Izt=181.5mA, 1W	DO-216	4d	1a	Msc
622	-	1PMT4622	Zener diode	3.9V±5%, Izt=174.9mA, 1W	DO-216	4d	1a	Msc
623	-	1PMT4623	Zener diode	4.3V±5%, Izt=168.4mA, 1W	DO-216	4d	1a	Msc
624	-	1PMT4624	Zener diode	4.7V±5%, Izt=164.0mA, 1W	DO-216	4d	1a	Msc
625	-	1PMT4625	Zener diode	5.1V±5%, Izt=153.1mA, 1W	DO-216	4d	1a	Msc
626	-	1PMT4626	Zener diode	5.6V±5%, Izt=142.2mA, 1W	DO-216	4d	1a	Msc
627	-	1PMT4627	Zener diode	6.2V±5%, Izt=133.4mA, 1W	DO-216	4d	1a	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
62A	-	1.5SMC62A	TVS	Vrwm=53V, Vbr=58.9..65.1V, Ipp=17.7A, 1500W(1ms)	DO-214AB	1d	2s	Lif
62A	-	1.5SMC62A	TVS	Vrwm=53V, Vbr=58.9..65.1V, Ipp=17.7A, 1500W(1ms)	403	3d	2t	Ons
62A	-	1.5SMC62A	TVS	Vrwm=53V, Vbr=58.9..65.1V, Ipp=17.7A, 1500W(1ms)	DO-214AB	1d	1b	Mde
62A	-	1.5SMC62A	TVS	Vrwm=53V, Vbr=58.9..65.1V, Ipp=17.7A, 1500W(1ms)	DO-214AB	1d	1k	Vs
62A	-	P4SMA62A	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
62A	-	P4SMA62A	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 400W(1ms)	DO-214AC	1d	1k	Vs
62A	-	P6SMB62A	TVS	Vrwm=62V, Vbr=58.9..65.1V, 7.1A, 600W(1ms)	403A	3d	1s	Ons
62A	-	P6SMB62A	TVS	Vrwm=62V, Vbr=58.9..65.1V, 7.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
62A	-	P6SMBJ62A	TVS	Vrwm=62V, Vbr=55.8..68.2V, 7.1A, 600W(1ms)	DO-214AA	1d	1n	Lif
62A	-	SMAJP4KE62A	TVS	Vrwm=53.0V, Vbr=58.90 65.10V, Ipp=4.8A, 400W(1ms)	DO-214AC	1d	1a	Mco
62A	-	SMBJP6KE62A	TVS	Vrwm=53.0V, Vbr=58.90..65.10V, Ipp=7.2A, 600W(1ms)	DO-214AA	1d	1a	Mco
62A	-	SMCJ1.5KE62A	TVS	Vrwm=53.0V, Vbr=58.90..65.10V, Ipp=17.9A, 1500W(1ms)	DO-214AB	1d	1a	Mco
62A	-	SZP6SMB62A	TVS	Vrwm=62V, Vbr=58.9..65.1V, 7.1A, 600W(1ms)	403A	3d	1s	Ons
62A	-	TVP04A620A-G	TVS	Vbr=58.90..65.10V, Vrwm=53.0V, Ipp=4.71A, 400W(1ms)	DO-214AC	1d	2o	Cmc
62A	-	TVP06B62A-G	TVS	Vrwm=53.0V, Vbr=58.90..65.10V, Ipp=7.06A, 600W(1ms)	DO-214AA	1d	2o	Cmc
62B	-	1SMB3EZ62	Zener diode	62V±5%, Zzt=60Ω, Izt=12.0mA, 3W	DO-214AA	1d	1a	Pjt
62B	-	MMHZ5262BPT	Zener diode	48.45..53.35V, Izt=2.5mA, Zzt=125Ω, 225mW	SOD-123	5d	1a	Chm
62B	-	SMC5362B	Zener diode	28.0V±5%, Zzt=6.0(50.0mA), Izm=170.0mA, 5W	DO-214AB	1d	1a	Ers
62C	-	1.5SMC62CA	TVS	Vrwm=53V, Vbr=58.9..65.1V, Ipp=17.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
62C	-	1.5SMC62CA	TVS	Vrwm=53V, Vbr=58.9..65.1V, Ipp=17.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
62C	-	1.5SMC62CA	TVS	Vrwm=53V, Vbr=58.9..65.1V, Ipp=17.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
62C	-	P4SMA62C	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 4.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
62C	-	P4SMA62CA	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
62C	-	P6SMB62CA	TVS	Vrwm=62V, Vbr=58.9..65.1V, 7.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
62C	-	P6SMBJ62C	TVS	Vrwm=62V, Vbr=55.8..68.2V, 6.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
62C	-	SMAJP4KE62CA	TVS	Vrwm=53.0V, Vbr=58.90..65.10V, Ipp=4.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
62C	-	SMBJP6KE62CA	TVS	Vrwm=53.0V, Vbr=58.90..65.10V, Ipp=7.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
62C	-	SMCJ1.5KE62CA	TVS	Vrwm=53.0V, Vbr=58.90..65.10V, Ipp=17.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
62C	-	TVP04A620CA-G	TVS	Vbr=58.90..65.10V, Vrwm=53.0V, Ipp=4.71A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
62C	-	TVP06B62ACA-G	TVS	Vrwm=53.0V, Vbr=58.90..65.10V, Ipp=7.06A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
62CA	-	P4SMA62CA	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
62CA	-	P6SMB62CA	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 7.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
62CA	-	P6SMBJ62CA	TVS	Vrwm=62V, Vbr=55.8..68.2V, 7.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
62P	-	BZD27C62P	Zener diode	58.9..65.1V, Zzt=80Ω, Izt=10mA, 800mW	SOD-123FL	7d	1a	Pjt
62P	-	MFPZ62	Zener diode	58.90..65.10V, Izt=10mA, Zzt=80Ω, 800mW	SOD-123FL	7d	1a	Ttr
62S	-	MMHZ5262SPT	Zener diode	49.98..52.02V, Izt=2.5mA, Zzt=125Ω, 225mW	SOD-123	5d	1a	Chm
62VB	-	BZT52B62	Zener diode	60.76..63.24V, Izt=2mA, Zzt=215Ω, 500mW	SOD-123FL	7d	1a	Tsc
62VB	-	MMSZ62VBW	Zener diode	60.76..63.24V, Izt=2mA, Zzt=215Ω, 500mW	SOD-123FL	7d	1a	Tac
62VZ	-	BZT52C62	Zener diode	58.90..65.10V, Izt=2mA, Zzt=215Ω, 500mW	SOD-123FL	7d	1a	Tsc
62VZ	-	MMSZ62VCW	Zener diode	58.90..65.10V, Izt=2mA, Zzt=215Ω, 500mW	SOD-123FL	7d	1a	Tac
62VZ	-	TCMMSZ62V	Zener diode	62V±5%, Izt=5mA, Zzt=202Ω, 500mW	SOD-123FL	7d	1a	Tac
62VZ	-	ZGFM0562C-MH	Zener diode	58.90..65.1V, Izt=5mA, Zzt=202Ω, 500mW	SOD-123	5d	1a	Pic
62Z	-	HZU6.2Z	Zener diode	5.9..6.5V, Izt=5mA, 200mW	SOD-323	5d	1a	Ren
63	-	1SR159-200	Si-diode	Rectfier, 200V, 1A, Vf<0.98V(1A)	SOD-106	1d	1ka	Rhm
63B	-	MMHZ5263BPT	Zener diode	53.20..58.80V, Izt=2.2mA, Zzt=150Ω, 225mW	SOD-123	5d	1a	Chm
63B	-	SMC5363B	Zener diode	30.0V±5%, Zzt=8.0(40.0mA), Izm=158.0mA, 5W	DO-214AB	1d	1a	Ers
63S	-	MMHZ5263SPT	Zener diode	54.88..57.12V, Izt=2.2mA, Zzt=150Ω, 225mW	SOD-123	5d	1a	Chm
64	-	BAT64-02W	Si-diode	SBD, Fast-Sw, 30V, 250mA, Vf<0.75V, Cd<6pF	SCD-80	6d	1u	Inf
64	-	SMBG64	TVS	Vrwm=64V, Vbr=71.1..90.1V, 5.3A, 600W(1ms)	DO-215AA	5d	1a	Msc
64A	-	1SMC64A	TVS	Vbr=71.1..78.6V, Vrwm=64V, 14.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
64A	-	MMF64A	TVS	Vrwm=64V, Vbr=71.1..81.8V, Ipp=1.7A, 200W(1ms)	SOD-123FL	7d	2m	Sst
64A	-	SMAJ64A	TVS	Vrwm=64V, Vbr=71.1..78.6V, 3.9A, 400W(1ms)	DO-214AC	1d	1a	Sus
64A	-	SMBG64A	TVS	Vrwm=64V, Vbr=71.1..81.8V, 5.8A, 600W(1ms)	DO-215AA	5d	1a	Msc
64A	-	SMBJ64A	TVS	Vrwm=64V, Vbr=71.1..81.8V, 5.8A, 600W(1ms)	DO-214AA	1d	1a	Sus
64A	-	SMCJ64A	TVS	Vrwm=64V, Vbr=71.1..81.8V, 13.2A, 1500W(1ms)	DO-214AB	1d	1k	Sus
64A	-	SMF64A	TVS	Vbr=71.1..78.6V, Vrwm=64V, Ipp=1.7A, 200W(1ms)	SOD-123FL	7d	1a	Mco
64A	-	UMA64A	TVS	Vrwm=64V, Vbr=71.1..103.0V, 4.9A, 500W(1ms)	UltraMite	14d	1v	Msc
64B	-	MMHZ5264BPT	Zener diode	57.0..63.0V, Izt=2.1mA, Zzt=170Ω, 225mW	SOD-123	5d	1a	Chm
64B	-	SMC5364B	Zener diode	33.0V±5%, Zzt=10.0(40.0mA), Izm=144.0mA, 5W	DO-214AB	1d	1a	Ers
64C	-	SMBG64C	TVS	Vrwm=64V, Vbr=71.1..90.1V, 5.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
64CA	-	1SMC64CA	TVS	Vbr=71.1..78.6V, Vrwm=64V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
64CA	-	MMF64CA	TVS	Vrwm=64V, Vbr=71.1..81.8V, Ipp=1.7A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
64CA	-	SMAJ64CA	TVS	Vrwm=64V, Vbr=71.1..78.6V, 3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
64CA	-	SMBG64CA	TVS	Vrwm=64V, Vbr=71.1..81.8V, 5.8A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
64CA	-	SMBJ64CA	TVS	Vbr=71.1..78.6V, Vrwm=64V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
64CA	-	SMCJ64CA	TVS	Vrwm=64V, Vbr=71.1..81.8V, 13.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
64CA	-	SMF64CA	TVS	Vbr=71.1..78.6V, Vrwm=64V, Ipp=1.7A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
64CA	-	UMA64CA	TVS	Vrwm=64V, Vbr=71.1..103.0V, 4.9A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
64S	-	MMHZ5264SPT	Zener diode	58.80..61.20V, Izt=2.1mA, Zzt=170Ω, 225mW	SOD-123	5d	1a	Chm
64V	-	SMA64	TVS	Vbr=71.1..86.4V, Vrwm=64.0V, 2.6A, 300W(1ms)	DO-214AC	1d	1a	Mic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
64V	-	SMB64	TVS	Vbr=71.1..86.9V, Vrwm=64V, 5.3A, 600W(1ms)	DO-214AA	1d	1a	Mic
64V	-	SMC64	TVS	Vbr=71.1..86.9V, Vrwm=64V, 13.2A, 1500W(1ms),	DO-214AB	1d	1a	Mic
64VA	-	SMA64A	TVS	Vbr=71.1..78.6V, Vrwm=64.0V, 2.9A, 300W(1ms)	DO-214AC	1d	1a	Mic
64VA	-	SMB64A	TVS	Vbr=71.1..78.6V, Vrwm=64V, 5.8A, 600W(1ms)	DO-214AA	1d	1a	Mic
64VA	-	SMC64A	TVS	Vbr=71.1..78.6V, Vrwm=64V, 14.6A, 1500W(1ms),	DO-214AB	1d	1a	Mic
64VC	-	SMA64C	TVS	Vbr=71.1..86.4V, Vrwm=64.0V, 2.6A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
64VC	-	SMB64C	TVS	Vbr=71.1..86.9V, Vrwm=64V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
64VC	-	SMC64C	TVS	Vbr=71.1..86.9V, Vrwm=64V, 13.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
64VCA	-	SMA64CA	TVS	Vbr=71.1..78.6V, Vrwm=64.0V, 2.9A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
64VCA	-	SMB64CA	TVS	Vbr=71.1..78.6V, Vrwm=64V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
64VCA	-	SMC64CA	TVS	Vbr=71.1..78.6V, Vrwm=64V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
65	-	BZX584B4V3	Zener diode	4.21..4.39V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523FL	7d	1a	Tac
65	-	EDZ18B	Zener diode	17.56..18.35V, Izt=5mA, Zzt=65Ω, 150mW	SOD-523	6d	1a	Rhm
65	-	EDZV18B	Zener diode	17.56..18.35V, Izt=5.0mA, Zzt=65Ω, 150mW	SOD-523	6d	2v	Rhm
65	-	FDZ18EV	Zener diode	17.560..18.350V, Izt=5mA, Zzt=65Ω, 150mW	SOD-523	6d	1a	Fis
65	-	FDZ18VT	Zener diode	17.560..18.350V, Izt=5mA, Zzt=65Ω, 200mW	SOD-323	5d	1a	Fis
65	-	GDZ3V6B-V-G	Zener diode	3.6..3.845V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	2m	Vs
65	-	LBZT52B18T1G	Zener diode	17.58..18.35V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
65	-	LEDZ18BT1G	Zener diode	17.56..18.35V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
65	-	LUDZS18BT1G	Zener diode	17.56..18.35V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
65	-	MM5Z4V3B	Zener diode	4.21..4.39V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523FL	7d	1a	Tac
65	-	TDZ18B	Zener diode	18V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
65	-	UDZS18B	Zener diode	18V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
65	-	UDZS1BB	Zener diode	17.56..18.35V, Izt=5mA, Zzt=65Ω, 200mW	SOD-323	5d	1a	Wtr
65	-	UDZV18B	Zener diode	17.56..18.35V, Izt=5.0mA, Zzt=65Ω, 200mW	SOD-323	5d	2v	Rhm
65	-	VDZS18B	Zener diode	18V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
6510	-	SMBJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 41.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
6510	-	SMBJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 41.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6510	-	STB6510	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 41.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6510	-	STU6510	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 41.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6510	-	SZ6510	Zener diode	10V±5%, Izt=125mA, Zzt=2.0Ω, 5W	DO-214AA	1d	1a	Eic
6511	-	SMBJ9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6511	-	SMBJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6511	-	STB6511	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 38.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6511	-	STU6511	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 38.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6511	-	SZ6511	Zener diode	11V±5%, Izt=125mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
6512	-	SMBJ10A	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6512	-	SMBJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6512	-	STB6512	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 36.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6512	-	STU6512	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 36.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6512	-	SZ6512	Zener diode	12V±5%, Izt=100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
6513	-	SMBJ11A	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6513	-	SMBJ11CA	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6513	-	STB6513	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 33.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6513	-	STU6513	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 33.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6513	-	SZ6513	Zener diode	13V±5%, Izt=100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
6514	-	SMBJ12A	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6514	-	SMBJ12CA	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6514	-	SZ6514	Zener diode	14V±5%, Izt=100mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
6515	-	SMBJ13A	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
6515	-	SMBJ13CA	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6515	-	STB6515	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 28.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6515	-	STU6515	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 28.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6515	-	SZ6515	Zener diode	15V±5%, Izt=75mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
6516	-	STB6516	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 27.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6516	-	STU6516	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 27.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6516	-	SZ6516	Zener diode	16V±5%, Izt=75mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
6517	-	SMBJ14A	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6517	-	SMBJ14CA	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6517	-	SZ6517	Zener diode	17V±5%, Izt=70mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
6518	-	SMBJ15A	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
6518	-	SMBJ15CA	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6518	-	STB6518	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 24.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6518	-	STU6518	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 24.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6518	-	SZ6518	Zener diode	18V±5%, Izt=65mA, Zzt=2.5Ω, 5W	DO-214AA	1d	1a	Eic
6519	-	SMBJ16A	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
6519	-	SMBJ16CA	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6519	-	SZ6519	Zener diode	19V±5%, Izt=65mA, Zzt=3.0Ω, 5W	DO-214AA	1d	1a	Eic
6520	-	SMBJ17A	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
6520	-	SMBJ17CA	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
6520	-	STB6520	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 22.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6520	-	STU6520	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 22.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6520	-	SZ6520	Zener diode	20V±5%, Izt=65mA, Zzt=3.0Ω, 5W	DO-214AA	1d	1a	Eic
6522	-	SMBJ18A	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
6522	-	SMBJ18CA	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6522	-	STB6522	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 20.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6522	-	STU6522	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 20.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6522	-	SZ6522	Zener diode	22V±5%, Izt=50mA, Zzt=3.5Ω, 5W	DO-214AA	1d	1a	Eic
6524	-	SMBJ20A	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
6524	-	SMBJ20CA	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6524	-	STB6524	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 18.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6524	-	STU6524	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 18.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6524	-	SZ6524	Zener diode	24V±5%, Izt=50mA, Zzt=3.5Ω, 5W	DO-214AA	1d	1a	Eic
6525	-	SZ6525	Zener diode	25V±5%, Izt=50mA, Zzt=4.0Ω, 5W	DO-214AA	1d	1a	Eic
6526	-	SMBJ22A	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
6526	-	SMBJ22CA	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6527	-	STB6527	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6527	-	STU6527	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6527	-	SZ6527	Zener diode	27V±5%, Izt=50mA, Zzt=5.0Ω, 5W	DO-214AA	1d	1a	Eic
6528	-	SZ6528	Zener diode	28V±5%, Izt=50mA, Zzt=6.0Ω, 5W	DO-214AA	1d	1a	Eic
6529	-	SMBJ24A	TVS	Vrwm=24V, Vbr=26.7..30.7V, 15.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
6529	-	SMBJ24CA	TVS	Vrwm=24V, Vbr=26.7..30.7V, 15.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6530	-	STB6530	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 14.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6530	-	STU6530	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 14.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
6530	-	SZ6530	Zener diode	30V±5%, Izt=40mA, Zzt=8.0Ω, 5W	DO-214AA	1d	1a	Eic
6531	-	SMBJ26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, 14.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
6531	-	SMBJ26CA	TVS	Vrwm=26V, Vbr=28.9..33.2V, 14.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6533	-	SMBJ28A	TVS	Vrwm=28V, Vbr=31.1..35.8V, 13.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
6533	-	SMBJ28CA	TVS	Vrwm=28V, Vbr=31.1..35.8V, 13.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6533	-	STB6533	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 13.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6533	-	STU6533	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 13.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
6533	-	SZ6533	Zener diode	33V±5%, Izt=40mA, Zzt=10Ω, 5W	DO-214AA	1d	1a	Eic
6536	-	SMBJ30A	TVS	Vrwm=30V, Vbr=33.1..38.3V, 12.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
6536	-	SMBJ30CA	TVS	Vrwm=30V, Vbr=33.1..38.3V, 12.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6536	-	STB6536	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 12.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6536	-	STU6536	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 12.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
6536	-	SZ6536	Zener diode	36V±5%, Izt=30mA, Zzt=11Ω, 5W	DO-214AA	1d	1a	Eic
6539	-	STB6539	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 11.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6539	-	STU6539	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 11.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
6539	-	SZ6539	Zener diode	39V±5%, Izt=30mA, Zzt=14Ω, 5W	DO-214AA	1d	1a	Eic
6540	-	SMBJ33A	TVS	Vrwm=33V, Vbr=36.7..42.2V, 11.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6540	-	SMBJ33CA	TVS	Vrwm=33V, Vbr=36.7..42.2V, 11.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6543	-	SMBJ36A	TVS	Vrwm=36V, Vbr=40.0..46.0V, 10.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6543	-	SMBJ36CA	TVS	Vrwm=36V, Vbr=40..46V, 10.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6543	-	STB6543	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 10.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6543	-	STU6543	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 10.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
6543	-	SZ6543	Zener diode	43V±5%, Izt=30mA, Zzt=20Ω, 5W	DO-214AA	1d	1a	Eic
6547	-	STB6547	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6547	-	STU6547	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 9.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6547	-	SZ6547	Zener diode	47V±5%, Izt=25mA, Zzt=25Ω, 5W	DO-214AA	1d	1a	Eic
6548	-	SMBJ40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6548	-	SMBJ40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6551	-	SMBJ43A	TVS	Vrwm=43V, Vbr=47.8..54.9V, 8.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
6551	-	SMBJ43CA	TVS	Vrwm=43V, Vbr=47.8..54.9V, 8.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6551	-	STB6551	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 8.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6551	-	STU6551	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 8.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
6551	-	SZ6551	Zener diode	51V±5%, Izt=25mA, Zzt=27Ω, 5W	DO-214AA	1d	1a	Eic
6554	-	SMBJ45A	TVS	Vrwm=45V, Vbr=50.0..57.5V, 8.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6554	-	SMBJ45CA	TVS	Vrwm=45V, Vbr=50.0..57.5V, 8.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6556	-	STB6556	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 7.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6556	-	STU6556	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 7.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
6556	-	SZ6556	Zener diode	56V±5%, Izt=20mA, Zzt=35Ω, 5W	DO-214AA	1d	1a	Eic
6557	-	SMBJ48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
6557	-	SMBJ48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
655B	-	SZ655B	Zener diode	5.1V±5%, Izt=240mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1a	Eic
655G	-	SZ655G	Zener diode	5.6V±5%, Izt=220mA, Zzt=1.0Ω, 5W	DO-214AA	1d	1a	Eic
6560	-	SZ6560	Zener diode	60V±5%, Izt=20mA, Zzt=40Ω, 5W	DO-214AA	1d	1a	Eic
6561	-	SMBJ51A	TVS	Vrwm=51V, Vbr=56.7..65.2V, 7.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6561	-	SMBJ51CA	TVS	Vrwm=51V, Vbr=56.7..65.2V, 7.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6562	-	STB6562	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 7.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
6562	-	STU6562	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 7.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
6562	-	SZ6562	Zener diode	62V±5%, Izt=20mA, Zzt=42Ω, 5W	DO-214AA	1d	1a	Eic
6565	-	SMBJ54A	TVS	Vrwm=54V, Vbr=60.0..69.0V, 6.9A, 600W(1ms)	DO-214AA	1d	1a	Eic
6565	-	SMBJ54CA	TVS	Vrwm=54V, Vbr=60.0..69.0V, 6.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6568	-	STB6568	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 6.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6568	-	STU6568	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 6.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
6568	-	SZ6568	Zener diode	68V±5%, Izt=20mA, Zzt=44Ω, 5W	DO-214AA	1d	1a	Eic
656A	-	SZ656A	Zener diode	6.0V±5%, Izt=200mA, Zzt=1.0Ω, 5W	DO-214AA	1d	1a	Eic
656C	-	SZ656C	Zener diode	6.2V±5%, Izt=200mA, Zzt=1.0Ω, 5W	DO-214AA	1d	1a	Eic
656I	-	SMBJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
656I	-	SMBJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
656I	-	STB656I	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 57.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
656I	-	STU656I	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 57.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
656I	-	SZ656I	Zener diode	6.8V±5%, Izt=175mA, Zzt=1.0Ω, 5W	DO-214AA	1d	1a	Eic
6570	-	SMBJ58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, 6.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
6570	-	SMBJ58CA	TVS	Vrwm=58V, Vbr=64.4..74.1V, 6.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6572	-	SMBJ60A	TVS	Vrwm=60V, Vbr=66.7..76.7V, 6.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
6572	-	SMBJ60CA	TVS	Vrwm=60V, Vbr=66.7..76.7V, 6.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6575	-	STB6575	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6575	-	STU6575	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 5.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
6575	-	SZ6575	Zener diode	75V±5%, Izt=20mA, Zzt=45Ω, 5W	DO-214AA	1d	1a	Eic
6576	-	SMBJ64A	TVS	Vrwm=64V, Vbr=71.1..81.8V, 5.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
6576	-	SMBJ64CA	TVS	Vrwm=64V, Vbr=71.1..81.8V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
657C	-	SMBJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, 58.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
657C	-	SMBJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, 58.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
657F	-	STB657F	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 53.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
657F	-	STU657F	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 53.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
657F	-	SZ657F	Zener diode	7.5V±5%, Izt=175mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1a	Eic
657I	-	SMBJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
657I	-	SMBJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6582	-	STB6582	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6582	-	STU6582	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 5.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6582	-	SZ6582	Zener diode	82V±5%, Izt=15mA, Zzt=65Ω, 5W	DO-214AA	1d	1a	Eic
6584	-	SMBJ70A	TVS	Vrwm=70V, Vbr=77.8..89.5V, 5.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
6584	-	SMBJ70CA	TVS	Vrwm=70V, Vbr=77.8..89.5V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6587	-	SZ6587	Zener diode	87V±5%, Izt=15mA, Zzt=75Ω, 5W	DO-214AA	1d	1a	Eic
658C	-	STB658C	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 50.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
658C	-	STU658C	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 50.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
658C	-	SZ658C	Zener diode	8.2V±5%, Izt=150mA, Zzt=1.5Ω, 5W	DO-214AA	1d	1a	Eic
658E	-	SMBJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, 50.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
658E	-	SMBJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, 50.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
658H	-	SZ658H	Zener diode	8.7V±5%, Izt=150mA, Zzt=2.0Ω, 5W	DO-214AA	1d	1a	Eic
6590	-	SMBJ75A	TVS	Vrwm=75V, Vbr=83.3..95.8V, 4.9A, 600W(1ms)	DO-214AA	1d	1a	Eic
6590	-	SMBJ75CA	TVS	Vrwm=75V, Vbr=83.3..95.8V, 4.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6591	-	STB6591	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 4.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
6591	-	STU6591	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 4.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
6591	-	SZ6591	Zener diode	91V±5%, Izt=15mA, Zzt=75Ω, 5W	DO-214AA	1d	1a	Eic
6593	-	SMBJ78A	TVS	Vrwm=58V, Vbr=86.7..99.7V, 4.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
6593	-	SMBJ78CA	TVS	Vrwm=78V, Vbr=86.7..99.7V, 4.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
659A	-	SMBJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 46.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
659A	-	SMBJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 46.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
659B	-	STB659B	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 45.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
659B	-	STU659B	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 45.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
659B	-	SZ659B	Zener diode	9.1V±5%, Izt=150mA, Zzt=2.0Ω, 5W	DO-214AA	1d	1a	Eic
659G	-	SMBJ8.0A	TVS	Vrwm=8.0V, Vbr=8.89..10.23V, 44.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
659G	-	SMBJ8.0CA	TVS	Vrwm=8V, Vbr=8.89..10.23V, 44.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65B	-	MMHZ5265BPT	Zener diode	58.90..65.10V, Izt=2mA, Zzt=185Ω, 225mW	SOD-123	5d	1a	Chm
65B	-	SMC5365B	Zener diode	36.0V±5%, Zzt=11.0(30.0mA), Izm=132.0mA, 5W	DO-214AB	1d	1a	Ers
65B0	-	SMBJ85A	TVS	Vrwm=85V, Vbr=94.4..108.2V, 4.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
65B0	-	SMBJ85CA	TVS	Vrwm=85V, Vbr=94.4..108.2V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65B0	-	STB65B0	TVS	Vbr=95.0..105V, Vrwm=85.5V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65B0	-	STU65B0	TVS	Vbr=95.0..105V, Vrwm=85.5V, 4.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
65B0	-	SZ65B0	Zener diode	100V±5%, Izt=12mA, Zzt=90Ω, 5W	DO-214AA	1d	1a	Eic
65B1	-	SMBJ90A	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
65B1	-	SMBJ90CA	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65B1	-	STB65B1	TVS	Vbr=105..116V, Vrwm=94V, 4.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65B1	-	STU65B1	TVS	Vbr=105..116V, Vrwm=94V, 4.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
65B1	-	SZ65B1	Zener diode	110V±5%, Izt=12mA, Zzt=125Ω, 5W	DO-214AA	1d	1a	Eic
65B2	-	SMBJ100A	TVS	Vrwm=100V, Vbr=111..128.0V, 3.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
65B2	-	SMBJ100CA	TVS	Vrwm=100V, Vbr=111..128V, 3.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
65B2	-	STB65B2	TVS	Vbr=114..126V, Vrwm=102V, 3.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65B2	-	STU65B2	TVS	Vbr=114..126V, Vrwm=102V, 3.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
65B2	-	SZ65B2	Zener diode	120V±5%, Izt=10mA, Zzt=170Ω, 5W	DO-214AA	1d	1a	Eic
65B3	-	SMBJ110A	TVS	Vrwm=110V, Vbr=122..154.5V, 3.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
65B3	-	SMBJ110CA	TVS	Vrwm=110V, Vbr=122..140.5V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65B3	-	STB65B3	TVS	Vbr=124..137V, Vrwm=111V, 3.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65B3	-	STU65B3	TVS	Vbr=124..137V, Vrwm=111V, 3.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
65B3	-	SZ65B3	Zener diode	130V±5%, Izt=10mA, Zzt=190Ω, 5W	DO-214AA	1d	1a	Eic
65B4	-	SMBJ120A	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
65B4	-	SMBJ120CA	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65B4	-	SZ65B4	Zener diode	140V±5%, Izt=8.0mA, Zzt=230Ω, 5W	DO-214AA	1d	1a	Eic
65B5	-	SMBJ130A	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
65B5	-	SMBJ130CA	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65B5	-	STB65B5	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65B5	-	STU65B5	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms)	DO-214AA	1d	1a	Eic
65B5	-	SZ65B5	Zener diode	150V±5%, Izt=8.0mA, Zzt=330Ω, 5W	DO-214AA	1d	1a	Eic
65B6	-	STB65B6	TVS	Vbr=152..168V, Vrwm=136V, 2.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65B6	-	STU65B6	TVS	Vbr=152..168V, Vrwm=136V, 2.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
65B6	-	SZ65B6	Zener diode	160V±5%, Izt=8.0mA, Zzt=350Ω, 5W	DO-214AA	1d	1a	Eic
65B7	-	STB65B7	TVS	Vbr=162..179V, Vrwm=145V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65B7	-	STU65B7	TVS	Vbr=162..179V, Vrwm=145V, 2.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
65B7	-	SZ65B7	Zener diode	170V±5%, Izt=8.0mA, Zzt=380Ω, 5W	DO-214AA	1d	1a	Eic
65B8	-	SMBJ150A	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
65B8	-	SMBJ150CA	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65B8	-	STB65B8	TVS	Vbr=171..189V, Vrwm=154V, 2.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65B8	-	STU65B8	TVS	Vbr=171..189V, Vrwm=154V, 2.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
65B8	-	SZ65B8	Zener diode	180V±5%, Izt=5.0mA, Zzt=430Ω, 5W	DO-214AA	1d	1a	Eic
65B9	-	SMBJ160A	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
65B9	-	SMBJ160CA	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65B9	-	SZ65B9	Zener diode	190V±5%, Izt=5.0mA, Zzt=450Ω, 5W	DO-214AA	1d	1a	Eic
65D0	-	SMBJ170A	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
65D0	-	SMBJ170CA	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65D0	-	STB65D0	TVS	Vbr=190..210V, Vrwm=171V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65D0	-	STU65D0	TVS	Vbr=190..210V, Vrwm=171V, 2.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
65D0	-	SZ65D0	Zener diode	200V±5%, Izt=5.0mA, Zzt=480Ω, 5W	DO-214AA	1d	1a	Eic
65D1	-	SMBJ188CA	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65D2	-	STB65D2	TVS	Vbr=209..231V, Vrwm=185V, 1.83A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65D2	-	STU65D2	TVS	Vbr=209..231V, Vrwm=185V, 1.83A, 600W(1ms)	DO-214AA	1d	1a	Eic
65D5	-	STB65D5	TVS	Vbr=237..263V, Vrwm=214V, 1.75A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65D5	-	STU65D5	TVS	Vbr=237..263V, Vrwm=214V, 1.75A, 600W(1ms)	DO-214AA	1d	1a	Eic
65E0	-	STB65E0	TVS	Vbr=285..315V, Vrwm=256V, 1.45A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65E0	-	STU65E0	TVS	Vbr=285..315V, Vrwm=256V, 1.45A, 600W(1ms)	DO-214AA	1d	1a	Eic
65E5	-	STB65E5	TVS	Vbr=332..368V, Vrwm=300V, 1.25A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65E5	-	STU65E5	TVS	Vbr=332..368V, Vrwm=300V, 1.25A, 600W(1ms)	DO-214AA	1d	1a	Eic
65G0	-	STB65G0	TVS	Vbr=380..420V, Vrwm=342V, 1.10A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65G0	-	STU65G0	TVS	Vbr=380..420V, Vrwm=342V, 1.10A, 600W(1ms)	DO-214AA	1d	1a	Eic
65G4	-	STB65G4	TVS	Vbr=418..462V, Vrwm=376V, 1.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
65G4	-	STU65G4	TVS	Vbr=418..462V, Vrwm=376V, 1.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
65S	-	MMHZ5265SPT	Zener diode	60.76..63.24V, Izt=2mA, Zzt=185Ω, 225mW	SOD-123	5d	1a	Chm
66	-	BBY56-02W	C-diode	VCO-tuning, 10V, 20mA, 59..67pF(3..1V)	SCD-80	6d	1u	Inf
66B	-	MMHZ5266BPT	Zener diode	64.60..71.40V, Izt=1.8mA, Zzt=230Ω, 225mW	SOD-123	5d	1a	Chm
66B	-	SMC5366B	Zener diode	39.0V±5%, Zzt=14.0(30.0mA), Izm=122.0mA, 5W	DO-214AB	1d	1a	Ers
66S	-	MMHZ5266SPT	Zener diode	66.64..69.36V, Izt=1.8mA, Zzt=230Ω, 225mW	SOD-123	5d	1a	Chm
67B	-	MMHZ5267BPT	Zener diode	71.25..78.75V, Izt=1.7mA, Zzt=270Ω, 225mW	SOD-123	5d	1a	Chm
67B	-	SMC5367B	Zener diode	43.0V±5%, Zzt=20.0(30.0mA), Izm=110.0mA, 5W	DO-214AB	1d	1a	Ers
67S	-	MMHZ5267SPT	Zener diode	73.50..76.50V, Izt=1.7mA, Zzt=270Ω, 225mW	SOD-123	5d	1a	Chm
68	-	CDZ55C68	Zener diode	64.60..71.40V, Zzt=200Ω, Izt=2.25mA, 500mW	1206	70d	2d	Crp
68	-	CDZ55C68S	Zener diode	64.60..71.40V, Zzt=200Ω, Izt=2.25mA, 500mW	0805	70d	2d	Crp
68	-	CDZ55C68T	Zener diode	64.60..71.40V, Zzt=200Ω, Izt=2.25mA, 200mW	0603	70d	2d	Crp
68	-	CZRNC55C68-G	Zener diode	64.60..71.40V, Zt=200Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
68	-	HZC6.8	Zener diode	6.8V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
68	-	HZU6.8G	Zener diode	6.4..7.14V, Izt=5mA, 200mW	SOD-323	5d	1a	Ren
68	-	KDZ6.8EV	Zener diode	6.4..7.2V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
68	-	KDZ6.8V	Zener diode	6.4..7.2V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
68	-	MMPZ5266SPT	Zener diode	66.64..69.36V, Izt=1.8mA, Zzt=230Ω, 225mW	SOD-323	5d	1a	Chm
68	-	P4SMA68	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 4.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
68	-	P6SMBJ68	TVS	Vrwm=68V, Vbr=61.2..74.8V, 6.1A, 600W(1ms)	DO-214AA	1d	1n	Lif
68	-	SML4760	Zener diode	68V±5%, Izt=3.7mA, Zzt=150Ω, 1W	DO-214AC	1d	1k	Vs
68	-	TZD6.8WS	Zener diode	6.40..7.20V, Izt=5mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Ttr
68	-	TZD6.8WT	Zener diode	6.40..7.20V, Izt=5mA, Zzt=25Ω, 150mW	SOD-523	6d	1a	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
68	-	U1ZB68	Zener diode	61.2..74.8V, Izt=4mA, 1W	3-4D1A	1d	2fa	Tos
68	-	USFZ6.8V	Zener diode	6.8V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
68	ax	CRY68	Zener diode	6.2..7.4V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
6-8	-	MAZ80680M	Zener diode	6.64..6.98V, Zzt=20Ω(5mA), 150mW	SC-76	6d	1a	Pan
6-8	-	MAZ8068GML	Zener diode	6.64..6.98V, Zzt=20Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
68•	-	TZD6.8YWS	Zener diode	6.65..6.93V, Izt=5mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Ttr
68•	-	TZD6.8YWT	Zener diode	6.65..6.93V, Izt=5mA, Zzt=25Ω, 150mW	SOD-523	6d	1a	Ttr
68A	-	1.5SMC100A	TVS	Vrwm=85.5V, Vbr=95..105V, Ipp=11A, 1500W(1ms)	DO-214AB	1d	1a	Fee
68A	-	1.5SMC68A	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, Ipp=16.3A, 1500W(1ms)	DO-214AB	1d	2s	Lif
68A	-	1.5SMC68A	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, Ipp=16.3A, 1500W(1ms)	403	3d	2t	Ons
68A	-	1.5SMC68A	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, Ipp=16.3A, 1500W(1ms)	DO-214AB	1d	1b	Mde
68A	-	1.5SMC68A	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, Ipp=16.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
68A	-	P4SMA68A	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 4.6A, 400W(1ms)	DO-214AC	1d	1k	Vs
68A	-	P4SMA68A	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 4.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
68A	-	P6SMB68A	TVS	Vrwm=68V, Vbr=64.6..71.4V, 6.5A, 600W(1ms)	403A	3d	1s	Ons
68A	-	P6SMB68A	TVS	Vrwm=68V, Vbr=64.6..71.4V, 6.5A, 600W(1ms)	DO-214AA	1d	1k	Vs
68A	-	P6SMBJ68A	TVS	Vrwm=68V, Vbr=61.2..74.8V, 6.5A, 600W(1ms)	DO-214AA	1d	1n	Lif
68A	-	SMAJP4KE68A	TVS	Vrwm=58.10V, Vbr=64.60..71.40V, Ipp=4.5A, 400W(1ms)	DO-214AC	1d	1a	Mco
68A	-	SMBJP6KE68A	TVS	Vrwm=58.10V, Vbr=64.60..71.40V, Ipp=6.6A, 600W(1ms)	DO-214AA	1d	1a	Mco
68A	-	SMCJ1.5KE68A	TVS	Vrwm=58.10V, Vbr=64.60..71.40V, Ipp=16.5A, 1500W(1ms)	DO-214AB	1d	1a	Mco
68A	-	SZP6SMB68A	TVS	Vrwm=68V, Vbr=64.6..71.4V, 6.5A, 600W(1ms)	403A	3d	1s	Ons
68A	-	TVP04A680A-G	TVS	Vbr=64.60..71.40V, Vrwm=58.1V, Ipp=4.35A, 400W(1ms)	DO-214AC	1d	2o	Cmc
68A	-	TVP06B68A-G	TVS	Vrwm=58.1V, Vbr=64.60..71.40V, Ipp=6.52A, 600W(1ms)	DO-214AA	1d	2o	Cmc
68B	-	1SMB3EZ68	Zener diode	68V±5%, Zzt=75Ω, Izt=11.0mA, 3W	DO-214AA	1d	1a	Pjt
68B	-	MMHZ5268BPT	Zener diode	77.90..86.10V, Izt=1.5mA, Zzt=330Ω, 225mW	SOD-123	5d	1a	Chm
68B	-	SMC5368B	Zener diode	47.0V±5%, Zzt=25.0(25.0mA), Izm=100.0mA, 5W	DO-214AB	1d	1a	Ers
68C	-	1.5SMC68CA	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, Ipp=16.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
68C	-	1.5SMC68CA	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, Ipp=16.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
68C	-	1.5SMC68CA	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, Ipp=16.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
68C	-	P4SMA68C	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 4.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
68C	-	P4SMA68CA	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 4.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
68C	-	P6SMB68CA	TVS	Vrwm=68V, Vbr=64.6..71.4V, 6.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
68C	-	P6SMBJ68C	TVS	Vrwm=68V, Vbr=61.2..74.8V, 6.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
68C	-	SMAJP4KE68CA	TVS	Vrwm=58.10V, Vbr=64.60..71.40V, Ipp=4.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
68C	-	SMBJP6KE68CA	TVS	Vrwm=58.10V, Vbr=64.60..71.40V, Ipp=6.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
68C	-	SMCJ1.5KE68CA	TVS	Vrwm=58.10V, Vbr=64.60..71.40V, Ipp=16.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
68C	-	TVP04A680CA-G	TVS	Vbr=64.60..71.40V, Vrwm=58.1V, Ipp=4.35A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
68C	-	TVP06B68ACA-G	TVS	Vrwm=58.1V, Vbr=64.60..71.40V, Ipp=6.52A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
68CA	-	P4SMA68CA	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 4.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
68CA	-	P6SMB68CA	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 6.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
68CA	-	P6SMBJ68CA	TVS	Vrwm=68V, Vbr=61.2..74.8V, 6.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
68P	-	BZD27C68P	Zener diode	64.6..71.4V, Zzt=80Ω, Izt=10mA, 800mW	SOD-123FL	7d	1a	Pjt
68P	-	MFPZ68	Zener diode	64.60..71.40V, Izt=10mA, Zzt=80Ω, 800mW	SOD-123FL	7d	1a	Ttr
68S	-	MMHZ5268SPT	Zener diode	80.36..83.64V, Izt=1.5mA, Zzt=330Ω, 225mW	SOD-123	5d	1a	Chm
68VB	-	BZT52B68	Zener diode	66.64..69.36V, Izt=2mA, Zzt=240Ω, 500mW	SOD-123FL	7d	1a	Tsc
68VB	-	MMSZ68VBW	Zener diode	66.64..69.36V, Izt=2mA, Zzt=240Ω, 500mW	SOD-123FL	7d	1a	Tac
68VZ	-	BZT52C68	Zener diode	64.60..71.40V, Izt=2mA, Zzt=240Ω, 500mW	SOD-123FL	7d	1a	Tsc
68VZ	-	MMSZ68VCW	Zener diode	64.60..71.40V, Izt=2mA, Zzt=240Ω, 500mW	SOD-123FL	7d	1a	Tac
68VZ	-	TCMMSZ68V	Zener diode	68V±5%, Izt=5mA, Zzt=226Ω, 500mW	SOD-123FL	7d	1a	Tac
68VZ	-	ZGFM0568C-MH	Zener diode	64.60..71.4V, Izt=5mA, Zzt=226Ω, 500mW	SOD-123	5d	1a	Pic
68Z	-	HZU6.8Z	Zener diode	6.47..7.0V, Izt=5mA, 200mW	SOD-323	5d	1a	Ren
69B	-	MMHZ5269BPT	Zener diode	82.65..91.35V, Izt=1.4mA, Zzt=370Ω, 225mW	SOD-123	5d	1a	Chm
69B	-	SMC5369B	Zener diode	51.0V±5%, Zzt=27.0(25.0mA), Izm=93.0mA, 5W	DO-214AB	1d	1a	Ers
69S	-	MMHZ5269SPT	Zener diode	85.26..88.74V, Izt=1.4mA, Zzt=370Ω, 225mW	SOD-123	5d	1a	Chm
6A	-	MA2Z360	C-diode	VHF/UHF-tuning, 30V, 20mA, 14.3/2pF(2/25V), 0.6Ω(470MHz)	SOD-123	5d	1a	Pan
6A	-	MA2Z360J	C-diode	VHF/UHF-tuning, 30V, 20mA, 14.3/2pF(2/25V), 0.6Ω(470MHz)	SOD-523	6d	1a	Pan
6A	-	MA321	C-diode	UHF-tuning, 30V, 15/2.25pF(2/25V)	SOD-123	5d	1a	Pan
6A	-	MA360	C-diode	VHF/UHF-tuning, 30V, 20mA, 14.3/2pF(2/25V), 0.6Ω(470MHz)	SOD-123	5d	1a	Pan
6A	-	MA360J	C-diode	VHF/UHF-tuning, 30V, 20mA, 14.3/2pF(2/25V), 0.6Ω(470MHz)	SOD-523	6d	1a	Pan
6A	-	MM1Z43	Zener diode	43V±5%, Izt=2.5mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Eic
6A1	-	MM1Z3B0H	Zener diode	2.94..3.06V, Izt=5mA, Zzt=120Ω, 500mW	SOD-123	5d	1a	Zow
6A2	-	RKZ6.2AKU	Zener diode	5.78..6.09V, Izt=20mA, Zzt=50Ω, 500mW	TURP-FM	7d	1a	Ren
6A8	-	RKZ6.8AKU	Zener diode	6.29..6.63V, Izt=20mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
6AD	-	SMA6J5.0	TVS	Vrwm=5.0V, Vbr=6.40..7.82V, Ipp=62.5A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AE	-	SMA6J5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.07V, Ipp=65.2A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AF	-	SMA6J6.0	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, Ipp=52.6A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AG	-	SMA6J6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=58.3A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AH	-	SMA6J6.5	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, Ipp=48.8A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AK	-	SMA6J6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=53.6A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AL	-	SMA6J7.0	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=45.1A, 600W(1ms)	DO-214AC	1d	1q	Gse

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
6AM	-	SMA6J7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=50.0A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AN	-	SMA6J7.5	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, Ipp=42.0A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AP	-	SMA6J7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=46.5A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AQ	-	SMA6J8.0	TVS	Vrwm=8.0V, Vbr=8.89..10.9V, Ipp=40.0A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AR	-	SMA6J8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=44.1A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AS	-	SMA6J8.5	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, Ipp=37.7A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AT	-	SMA6J8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, Ipp=41.7A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AU	-	SMA6J9.0	TVS	Vrwm=9.0V, Vbr=10.0..12.2V, Ipp=35.5A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AV	-	SMA6J9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, Ipp=39.0A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AW	-	SMA6J10	TVS	Vrwm=10V, Vbr=11.1..13.6V, Ipp=18.8A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AX	-	SMA6J10A	TVS	Vrwm=10V, Vbr=11.1..12.3V, Ipp=35.3A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AY	-	SMA6J11	TVS	Vrwm=11V, Vbr=12.2..14.9V, Ipp=29.9A, 600W(1ms)	DO-214AC	1d	1q	Gse
6AZ	-	SMA6J11A	TVS	Vrwm=11V, Vbr=12.2..13.5V, Ipp=33.0A, 600W(1ms)	DO-214AC	1d	1q	Gse
6B	-	CDZ55C6V2T	Zener diode	5.89..6.51V, Zzt=10Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
6B	-	MA2X329	C-diode	VHF-tuning, 32V, 20mA, 42/3pF(1/25V), 1.6Ω(470MHz)	SOD-123	5d	1a	Pan
6B	-	MA329	C-diode	VHF-tuning, 32V, 20mA, 42/3pF(1/25V), 1.6Ω(470MHz)	SOD-123	5d	1a	Pan
6B	-	MM1Z47	Zener diode	47V±5%, Izt=2.5mA, Zzt=150Ω, 500mW	SOD-123FL	7d	1a	Eic
6B1	-	MM1Z3B3H	Zener diode	3.234..3.366V, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1a	Zow
6B2	-	RKZ6.2BKU	Zener diode	5.96..6.27V, Izt=20mA, Zzt=50Ω, 500mW	TURP-FM	7d	1a	Ren
6B8	-	RKZ6.8BKU	Zener diode	6.49..6.83V, Izt=20mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
6BA	-	SMA6J5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.07V, Ipp=298A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BAA	-	SMA6J188CA	TVS	Vrwm=188V, Vbr=209..231V, Ipp=10.3A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BB	-	SMA6J6.0CA	TVS	Vrwm=6.0V, Vbr=6.70..7.41V, Ipp=290A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BC	-	SMA6J6.5CA	TVS	Vrwm=6.5V, Vbr=7.20..7.96V, Ipp=276A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BD	-	SMA6J12	TVS	Vrwm=12V, Vbr=13.3..16.3V, Ipp=27.3A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BD	-	SMA6J8.5CA	TVS	Vrwm=8.5V, Vbr=9.4..10.4V, Ipp=205A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BE	-	SMA6J10CA	TVS	Vrwm=10V, Vbr=11.1..12.3V, Ipp=184A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BE	-	SMA6J12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=30.2A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BF	-	SMA6J12CA	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=157A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BF	-	SMA6J13	TVS	Vrwm=13V, Vbr=14.4..17.6V, Ipp=25.2A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BG	-	SMA6J13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, Ipp=27.9A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BG	-	SMA6J13CA	TVS	Vrwm=13V, Vbr=14.4..15.9V, Ipp=147A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BH	-	SMA6J14	TVS	Vrwm=14V, Vbr=15.6..19.1V, Ipp=23.3A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BH	-	SMA6J15CA	TVS	Vrwm=15V, Vbr=16.7..18.5V, Ipp=123A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BJ	-	SMA6J18CA	TVS	Vrwm=18V, Vbr=20.0..22.1V, Ipp=102A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BK	-	SMA6J14A	TVS	Vrwm=14V, Vbr=15.6..17.2V, Ipp=25.9A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BK	-	SMA6J20CA	TVS	Vrwm=20V, Vbr=22.2..24.5V, Ipp=93A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BL	-	SMA6J15	TVS	Vrwm=15V, Vbr=16.7..20.4V, Ipp=22.3A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BM	-	SMA6J15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, Ipp=24.6A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BM	-	SMA6J24CA	TVS	Vrwm=24V, Vbr=26.7..29.5V, Ipp=80A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BN	-	SMA5J16	TVS	Vbr=17.8..21.8V, Vrwm=16V, 17.4A, 500W(1ms)	DO-214AC	1d	1k	Vs
6BN	-	SMA6J16	TVS	Vrwm=16V, Vbr=17.8..21.8V, Ipp=20.8A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BN	-	SMA6J26CA	TVS	Vrwm=26V, Vbr=28.9..31.9V, Ipp=75A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BO	-	SMA6J28CA	TVS	Vrwm=28V, Vbr=31.1..34.4V, Ipp=68A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BP	-	SMA6J16A	TVS	Vrwm=16V, Vbr=17.8..19.7V, Ipp=23.1A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BQ	-	SMA6J17	TVS	Vrwm=17V, Vbr=18.9..23.1V, Ipp=19.7A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BQ	-	SMA6J33CA	TVS	Vrwm=33V, Vbr=36.7..40.6V, Ipp=57A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BR	-	SMA6J17A	TVS	Vrwm=17V, Vbr=18.9..20.9V, Ipp=21.7A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BR	-	SMA6J40CA	TVS	Vrwm=40V, Vbr=44.4..49.1V, Ipp=48A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BS	-	SMA6J18	TVS	Vrwm=18V, Vbr=20.0..24.4V, Ipp=18.6A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BS	-	SMA6J48CA	TVS	Vrwm=48V, Vbr=53.3..58.9V, Ipp=40A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BT	-	SMA6J18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, Ipp=20.5A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BT	-	SMA6J58CA	TVS	Vrwm=58V, Vbr=64.4..71.2V, Ipp=33A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BU	-	SMA6J20	TVS	Vrwm=20V, Vbr=22.2..27.1V, Ipp=16.8A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BU	-	SMA6J70CA	TVS	Vrwm=70V, Vbr=77.8..86.0V, Ipp=27A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BV	-	SMA6J20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, Ipp=18.5A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BV	-	SMA6J85CA	TVS	Vrwm=85V, Vbr=94..104V, Ipp=22.5A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BW	-	SMA6J100CA	TVS	Vrwm=100V, Vbr=111..123V, Ipp=19A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BW	-	SMA6J22	TVS	Vrwm=22V, Vbr=24.4..29.8V, Ipp=15.2A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BX	-	SMA6J130CA	TVS	Vrwm=130V, Vbr=144..159V, Ipp=15A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BX	-	SMA6J22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, Ipp=16.9A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BY	-	SMA6J154CA	TVS	Vrwm=154V, Vbr=171..189V, Ipp=12.6A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BY	-	SMA6J24	TVS	Vrwm=24V, Vbr=26.7 32.6V, Ipp=14.0A, 600W(1ms)	DO-214AC	1d	1q	Gse
6BZ	-	SMA6J170CA	TVS	Vrwm=170V, Vbr=189..209V, Ipp=11.3A, 600W(1ms), Bidir.	DO-214AC	1ba	1q	Ste
6BZ	-	SMA6J24A	TVS	Vrwm=24V, Vbr=26.7 29.5V, Ipp=15.4A, 600W(1ms)	DO-214AC	1d	1q	Gse
6C	-	GBLC15C	TVS	Vrwm=15V, 10A, 350W(1ms), 3pF, Bidir.	SOD-323	5ba	1e	Prt
6C	-	MA2X333	C-diode	GaAs, UHF/VHF-TV-tun, VCO, 9V, 100mA, 15.5/4pF(2/6V)	SOD-123	5d	1a	Pan
6C	-	MA2Z362	C-diode	VHF/UHF-VCO, 9V, 20mA, 13.5/4pF(2/4V), 0.35Ω(470MHz)	SOD-123	5d	1a	Pan
6C	-	MA333	C-diode	GaAs, UHF/VHF-TV-tun, VCO, 9V, 100mA, 15.5/4pF(2/6V)	SOD-123	5d	1a	Pan
6C	-	MA362	C-diode	VHF/UHF-VCO, 9V, 20mA, 13.5/4pF(2/4V), 0.35Ω(470MHz)	SOD-123	5d	1a	Pan

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
6C	-	MM1Z51	Zener diode	51V±5%, Izt=2.5mA, Zzt=180Ω, 500mW	SOD-123FL	7d	1a	Eic
6C1	-	MM1Z3B6H	Zener diode	3.528..3.672V, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1a	Zow
6C2	-	RKZ6.2CKU	Zener diode	6.12..6.44V, Izt=20mA, Zzt=50Ω, 500mW	TURP-FM	7d	1a	Ren
6C7	-	CMDD7006	Si-diode	HV, Sw, 600V, 100mA, 250mW, Vf<1V(10mA), <5pF	SOD-323	5d	1a	Cen
6C8	-	RKZ6.8CKU	Zener diode	6.66..7.01V, Izt=20mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
6CD	-	SMA6J26	TVS	Vrwm=26V, Vbr=28.9..35.3V, Ipp=12.9A, 600W(1ms)	DO-214AC	1d	1q	Gse
6CE	-	SMA6J26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, Ipp=14.3A, 600W(1ms)	DO-214AC	1d	1q	Gse
6CF	-	SMA6J28	TVS	Vrwm=28V, Vbr=31.1..38.0V, Ipp=12.0A, 600W(1ms)	DO-214AC	1d	1q	Gse
6CG	-	SMA6J28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, Ipp=13.2A, 600W(1ms)	DO-214AC	1d	1q	Gse
6CH	-	SMA6J30	TVS	Vrwm=30V, Vbr=33.3..40.7V, Ipp=11.2A, 600W(1ms)	DO-214AC	1d	1q	Gse
6CK	-	SMA6J30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, Ipp=12.4A, 600W(1ms)	DO-214AC	1d	1q	Gse
6CL	-	SMA6J33	TVS	Vrwm=33V, Vbr=36.7..44.9V, Ipp=10.2A, 600W(1ms)	DO-214AC	1d	1q	Gse
6CM	-	SMA6J33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, Ipp=11.3A, 600W(1ms)	DO-214AC	1d	1q	Gse
6CN	-	SMA6J36	TVS	Vrwm=36V, Vbr=40.0..48.9V, Ipp=9.3A, 600W(1ms)	DO-214AC	1d	1q	Gse
6CP	-	SMA6J36A	TVS	Vrwm=36V, Vbr=40.0..44.2V, Ipp=10.3A, 600W(1ms)	DO-214AC	1d	1q	Gse
6CQ	-	SMA6J40	TVS	Vrwm=40V, Vbr=44.4..54.3V, Ipp=8.4A, 600W(1ms)	DO-214AC	1d	1q	Gse
6CR	-	SMA6J40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, Ipp=9.3A, 600W(1ms)	DO-214AC	1d	1q	Gse
6D	-	1SS380PT	Si-diode	Sw, 40V, 100mA, Vf<1.2V(100mA), 4ns	SOD-323	5d	1a	Chm
6D	-	MA2X334	C-diode	VHF/UHF-tuning, 30V, 20mA, 12/3.2pF(3/25V), 0.5Ω(470MHz)	SOD-123	5d	1a	Pan
6D	-	MA334	C-diode	VHF/UHF-tuning, 30V, 20mA, 12/3.2pF(3/25V), 0.5Ω(470MHz)	SOD-123	5d	1a	Pan
6D	-	MM1Z56	Zener diode	56V±5%, Izt=2.5mA, Zzt=180Ω, 500mW	SOD-123FL	7d	1a	Eic
6D1	-	MM1Z3B9H	Zener diode	3.822..3.978V, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1a	Zow
6E	-	MA2X335	C-diode	CATV, VHF-tun, 30V, 20mA, 29.4/2.58pF(2/25V), 0.72Ω(470MHz)	SOD-123	5d	1a	Pan
6E	-	MA335	C-diode	CATV, VHF-tun, 30V, 20mA, 29.4/2.58pF(2/25V), 0.72Ω(470MHz)	SOD-123	5d	1a	Pan
6E	-	MM1Z62	Zener diode	62V±5%, Izt=2.5mA, Zzt=200Ω, 500mW	SOD-123FL	7d	1a	Eic
6E1	-	MM1Z4B3H	Zener diode	4.214..4.386V, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1a	Zow
6F	-	KDZ5.1FV	Zener diode	4.80..5.40V, Izt=5mA, Zzt=70Ω, 100mW	TFSC	7d	1a	Kec
6F	-	MA2Z365	C-diode	CATV-tuning, 32V, 20mA, 36/2.54pF(2/25V), 0.85Ω(470MHz)	SOD-123	5d	1a	Pan
6F	-	MA337	C-diode	CATV-tuning, 32V, 2.6/3.1pF(25V)	SOD-123	5d	1a	Pan
6F	-	MA365	C-diode	CATV-tuning, 32V, 20mA, 36/2.54pF(2/25V), 0.85Ω(470MHz)	SOD-123	5d	1a	Pan
6F	-	MAZD039	Zener diode	3.7..4.1V, Zzt=130Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
6F	-	MM1Z68	Zener diode	68V±5%, Izt=2.5mA, Zzt=250Ω, 500mW	SOD-123FL	7d	1a	Eic
6F1	-	MM1Z4B7H	Zener diode	4.606..4.794V, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1a	Zow
6G1	-	MM1Z5B1H	Zener diode	4.998..5.202V, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1a	Zow
6H	-	CDZ55C6V8T	Zener diode	6.46..7.14V, Zzt=8Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
6H	-	MA2X338	C-diode	CATV-tuning, 34V, 20mA, 27.1/2.6pF(2/25V), 0.63Ω(470MHz)	SOD-123	5d	1a	Pan
6H	-	MA2Z366	C-diode	CATV-tuning, 34V, 20mA, 37.1/2.6pF(2/25V), 0.63Ω(470MHz)	SOD-123	5d	1a	Pan
6H	-	MA338	C-diode	CATV-tuning, 34V, 20mA, 27.1/2.6pF(2/25V), 0.63Ω(470MHz)	SOD-123	5d	1a	Pan
6H	-	MA366	C-diode	CATV-tuning, 34V, 20mA, 37.1/2.6pF(2/25V), 0.63Ω(470MHz)	SOD-123	5d	1a	Pan
6H	-	MM1Z75	Zener diode	75V±5%, Izt=2.5mA, Zzt=300Ω, 500mW	SOD-123FL	7d	1a	Eic
6H1	-	MM1Z5B6H	Zener diode	5.488..5.712V, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1a	Zow
6J	-	MM1Z82	Zener diode	82V±5%, Izt=2.5mA, Zzt=300Ω, 500mW	SOD-123	5d	1a	Bts
6J1	-	MM1Z6B2H	Zener diode	6.076..6.324V, Izt=5mA, Zzt=50Ω, 500mW	SOD-123	5d	1a	Zow
6K	-	MA2X341	C-diode	VHF/UHF-AFC, 30V, 10/3.3pF(2/10V), 1.6Ω(470MHz)	SOD-123	5d	1a	Pan
6K	-	MA2Z367	C-diode	VHF/UHF-AFC, 34V, 10.5/3.3pF(2/10V), 1.6Ω(470MHz)	SOD-123	5d	1a	Pan
6K	-	MA341	C-diode	VHF/UHF-AFC, 30V, 10/3.3pF(2/10V), 1.6Ω(470MHz)	SOD-123	5d	1a	Pan
6K	-	MA367	C-diode	VHF/UHF-AFC, 34V, 10.5/3.3pF(2/10V), 1.6Ω(470MHz)	SOD-123	5d	1a	Pan
6K	-	MM1Z91	Zener diode	91V±5%, Izt=1mA, Zzt=700Ω, 500mW	SOD-123	5d	1a	Bts
6K1	-	MM1Z6B8H	Zener diode	6.664..6.936V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Zow
6L	-	MA2Z368	C-diode	UHF/SHF-tuning, 30V, 20mA, 4.6/0.65pF(1/30V), 2Ω(470MHz)	SOD-123	5d	1a	Pan
6L	-	MA368	C-diode	UHF/SHF-tuning, 30V, 20mA, 4.6/0.65pF(1/30V), 2Ω(470MHz)	SOD-123	5d	1a	Pan
6L1	-	MM1Z7B5H	Zener diode	7.35..7.65V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Zow
6M	-	MM1Z100	Zener diode	100V±5%, Izt=1mA, Zzt=700Ω, 500mW	SOD-123	5d	1a	Bts
6M1	-	MM1Z8B2H	Zener diode	8.036..8.364V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Zow
6N	-	MA2J372	C-diode	VCO, 32V, 20mA, 15/9pF(2/17V), 0.45Ω(470MHz)	SOD-523	6d	1a	Pan
6N	-	MA2XA339	C-diode	VHF/UHF-tuning, 32V, 20mA, 14.2/2.1pF(2/25V), 0.45Ω(470MHz)	SOD-123	5d	1a	Pan
6N	-	MA2Z372	C-diode	UHF/VHF-tuning, 32V, 20mA, 15/9pF(2/17V), 0.45Ω(470MHz)	SOD-123	5d	1a	Pan
6N	-	MA339	C-diode	VHF/UHF-tuning, 32V, 20mA, 14.2/2.1pF(2/25V), 0.45Ω(470MHz)	SOD-123	5d	1a	Pan
6N	-	MA372	C-diode	UHF/VHF-tuning, 32V, 20mA, 15/9pF(2/17V), 0.45Ω(470MHz)	SOD-123	5d	1a	Pan
6N	-	MA372J	C-diode	UHF/VHF-tuning, 32V, 20mA, 15/9pF(2/17V), 0.45Ω(470MHz)	SOD-523	6d	1a	Pan
6N	-	MM1Z110	Zener diode	110V±5%, Izt=1mA, Zzt=800Ω, 500mW	SOD-123	5d	1a	Bts
6N1	-	MM1Z9B1H	Zener diode	8.918..9.282V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Zow
6P	-	CMDZ30L	Zener diode	28.50..31.50V, Izt=0.5mA, Zzt=200Ω, 250mW	SOD-323	5d	1a	Cen
6P	-	KDZ5.1FVY	Zener diode	4.98..5.20V, Izt=5mA, Zzt=70Ω, 100mW	TFSC	7d	1a	Kec
6P	-	MM1Z120	Zener diode	120V±5%, Izt=1mA, Zzt=900Ω, 500mW	SOD-123	5d	1a	Bts
6P1	-	MM1ZB10H	Zener diode	9.8..10.2V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Zow
6P2	-	SML4735	Zener diode	6.2V±5%, Izt=41mA, Zzt=2Ω, 1W	DO-214AC	1d	1k	Vs
6P8	-	SML4736	Zener diode	6.8V±5%, Izt=37mA, Zzt=3.5Ω, 1W	DO-214AC	1d	1k	Vs
6Q1	-	MM1ZB11H	Zener diode	10.78..11.22V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Zow
6R1	-	MM1ZB12H	Zener diode	11.76..12.24V, Izt=5mA, Zzt=35Ω, 500mW	SOD-123	5d	1a	Zow



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
6S	-	MA2Z371	C-diode	CATV-tuning, 32V, 20mA, 34/2.6pF(2/25V), 0.75Ω(470MHz)	SOD-123	5d	1a	Pan
6S	-	MA353	C-diode	CATV-tuning, 32V, 2.6/3.2pF(25V)	SOD-123	5d	1a	Pan
6S	-	MA371	C-diode	CATV-tuning, 32V, 20mA, 34/2.6pF(2/25V), 0.75Ω(470MHz)	SOD-123	5d	1a	Pan
6S	-	MMSD71RK	Si-diode	Sw, 80V, 200mA, 225mW, Vf<1.2V(100mA), <4ns	SOD-123	5d	1a	Ons
6S1	-	MM1ZB13H	Zener diode	12.74..13.26V, Izt=5mA, Zzt=35Ω, 500mW	SOD-123	5d	1a	Zow
6T	-	MA2Z331	C-diode	UHF-AFC, 12V, 20mA, 17/5.5pF(1/10V), 0.18Ω(470MHz)	SOD-123	5d	1a	Pan
6T	-	MA331	C-diode	UHF-AFC, 12V, 20mA, 17/5.5pF(1/10V), 0.18Ω(470MHz)	SOD-123	5d	1a	Pan
6T1	-	MM1ZB15H	Zener diode	14.7..15.3V, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1a	Zow
6U	-	MA332	C-diode	UHF-AFC, 6V, 10.5..12.5pF(4V)	SOD-123	5d	1a	Pan
6U	-	SD12	TVS	Vrwm=12.0V, Vbr=13.3..19V, Ipp=15A, 350W(1ms)	SOD-323	5d	1a	Smt
6U	-	SD12	TVS	Vrwm=12.0V, Vbr=13.3..19V, Ipp=15A, 300W(1ms)	SOD-323	5d	1a	Sec
6u	-	WOSD12	TVS	Vbr=13.3V, Vcl=19..25V, Ipp=15A, 300W(1ms)	SOD-323	5d	1e	Wtr
6U1	-	MM1ZB16H	Zener diode	15.68..16.32V, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1a	Zow
6UA	-	SMA6J5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.07V, Ipp=298A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UAA	-	SMA6J188A	TVS	Vrwm=188V, Vbr=209..231V, Ipp=10.3A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UB	-	SMA6J6.0A	TVS	Vrwm=6.0V, Vbr=6.70..7.41V, Ipp=290A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UC	-	SMA6J6.5A	TVS	Vrwm=6.5V, Vbr=7.20..7.96V, Ipp=276A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UD	-	SMA6J8.5A	TVS	Vrwm=8.5V, Vbr=9.4..10.4V, Ipp=205A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UE	-	SMA6J10A	TVS	Vrwm=10V, Vbr=11.1..12.3V, Ipp=184A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UF	-	SMA6J12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=157A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UG	-	SMA6J13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, Ipp=147A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UH	-	SMA6J15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, Ipp=123A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UJ	-	SMA6J18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, Ipp=102A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UK	-	SMA6J20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, Ipp=93A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UM	-	SMA6J24A	TVS	Vrwm=24V, Vbr=26.7..29.5V, Ipp=80A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UN	-	SMA6J26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, Ipp=75A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UO	-	SMA6J28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, Ipp=68A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UQ	-	SMA6J33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, Ipp=57A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UR	-	SMA6J40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, Ipp=48A, 600W(1ms)	DO-214AC	1d	1q	Ste
6US	-	SMA6J48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, Ipp=40A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UT	-	SMA6J58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, Ipp=33A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UU	-	SMA6J70A	TVS	Vrwm=70V, Vbr=77.8..86.0V, Ipp=27A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UV	-	SMA6J85A	TVS	Vrwm=85V, Vbr=94..104V, Ipp=22.5A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UW	-	SMA6J100A	TVS	Vrwm=100V, Vbr=111..123V, Ipp=19A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UX	-	SMA6J130A	TVS	Vrwm=130V, Vbr=144..159V, Ipp=15A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UY	-	SMA6J154A	TVS	Vrwm=154V, Vbr=171..189V, Ipp=12.6A, 600W(1ms)	DO-214AC	1d	1q	Ste
6UZ	-	SMA6J170A	TVS	Vrwm=170V, Vbr=189..209V, Ipp=11.3A, 600W(1ms)	DO-214AC	1d	1q	Ste
6V0	-	SMA6.0	TVS	Vbr=6.67..8.15V, Vrwm=6.0V, 26.3A, 300W(1ms)	DO-214AC	1d	1a	Mic
6V0	-	SMB6.0	TVS	Vbr=6.67..8.15V, Vrwm=6V, 52.3A, 600W(1ms)	DO-214AA	1d	1a	Mic
6V0	-	SMC6.0	TVS	Vbr=6.67..8.15V, Vrwm=6V, 131.6A, 1500W(1ms),	DO-214AB	1d	1a	Mic
6V0A	-	SMA6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 29.1A, 300W(1ms)	DO-214AC	1d	1a	Mic
6V0A	-	SMB6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6V, 58.3A, 600W(1ms)	DO-214AA	1d	1a	Mic
6V0A	-	SMC6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6V, 145.6A, 1500W(1ms),	DO-214AB	1d	1a	Mic
6V0C	-	SMA6.0C	TVS	Vbr=6.67..8.15V, Vrwm=6.0V, 26.3A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
6V0C	-	SMA6.5C	TVS	Vbr=7.22..8.82V, Vrwm=6.5V, 24.4A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
6V0C	-	SMB6.0C	TVS	Vbr=6.67..8.15V, Vrwm=6V, 52.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
6V0C	-	SMC6.0C	TVS	Vbr=6.67..8.15V, Vrwm=6V, 131.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
6V0CA	-	SMA6.0CA	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 29.1A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
6V0CA	-	SMA6.5CA	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 26.8A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
6V0CA	-	SMB6.0CA	TVS	Vbr=6.67..7.37V, Vrwm=6V, 58.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
6V0CA	-	SMC6.0CA	TVS	Vbr=6.67..7.37V, Vrwm=6V, 145.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
6V1	-	BZD27C6V0P	Zener diode	5.70..6.30V, Zzt=3Ω, Izt=100mA, 800mW	SOD-123FL	7d	1a	Pjt
6V1	-	MFPZ6V0	Zener diode	5.70..6.30V, Izt=100mA, Zzt=3Ω, 800mW	SOD-123FL	7d	1a	Ttr
6V2	-	BZD27C6V2P	Zener diode	5.89..6.51V, Zzt=3Ω, Izt=100mA, 800mW	SOD-123FL	7d	1a	Pjt
6V2	-	BZY55-C6V2	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 500mW	0805	70d	2d	Tsc
6V2	-	CDZ55C6V2	Zener diode	5.89..6.51V, Zzt=10Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
6V2	-	CDZ55C6V2S	Zener diode	5.89..6.51V, Zzt=10Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
6V2	-	CTZ55C6V2	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 500mW	1206	70d	2d	Ctc
6V2	-	CZRNC55C6V2-G	Zener diode	5.89..6.51V, Zt=10Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
6V2	-	CZRSC55C6V2-G	Zener diode	5.89..6.51V, Zt=10Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
6V2	-	DFLZ6V2	Zener diode	6.2V±5%, Izt=100mA, Zzt<3Ω, 1W	SOD-123FL	7d	1d	Mco
6V2	-	MFPZ6V2	Zener diode	5.89..6.51V, Izt=100mA, Zzt=3Ω, 800mW	SOD-123FL	7d	1a	Ttr
6V2B	-	BZT52B6V2	Zener diode	6.08..6.32V, Izt=5mA, Zzt=10Ω, 500mW	SOD-123FL	7d	1a	Tsc
6V2B	-	MMSZ6V2BW	Zener diode	6.08..6.32V, Izt=5mA, Zzt=10Ω, 500mW	SOD-123FL	7d	1a	Tac
6V2Z	-	BZT52C6V2	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 500mW	SOD-123FL	7d	1a	Tsc
6V2Z	-	MMSZ6V2CW	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 500mW	SOD-123FL	7d	1a	Tac
6V2Z	-	TCMMSZ6V2	Zener diode	6.2V±5%, Izt=5mA, Zzt=9Ω, 500mW	SOD-123FL	7d	1a	Tac
6V2Z	-	ZGFM056V2C-MH	Zener diode	5.89..6.51V, Izt=5mA, Zzt=9Ω, 500mW	SOD-123	5d	1a	Pic
6V5	-	SMA6.5	TVS	Vbr=7.22..8.82V, Vrwm=6.5V, 24.4A, 300W(1ms)	DO-214AC	1d	1a	Mic
6V5	-	SMB6.5	TVS	Vbr=7.22..8.82V, Vrwm=6.5V, 48.8A, 600W(1ms)	DO-214AA	1d	1a	Mic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
6V5	-	SMC6.5	TVS	Vbr=7.22..8.82V, Vrwm=6.5V, 122A, 1500W(1ms),	DO-214AB	1d	1a	Mic
6V5A	-	SMA6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 26.8A, 300W(1ms)	DO-214AC	1d	1a	Mic
6V5A	-	SMB6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms)	DO-214AA	1d	1a	Mic
6V5A	-	SMC6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 133.9A, 1500W(1ms),	DO-214AB	1d	1a	Mic
6V5C	-	SMB6.5C	TVS	Vbr=7.22..8.82V, Vrwm=6.5V, 48.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
6V5C	-	SMC6.5C	TVS	Vbr=7.22..8.82V, Vrwm=6.5V, 122A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
6V5CA	-	SMB6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
6V5CA	-	SMC6.5CA	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 133.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
6V6A	-	SMB6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 53.6A, 600W(1ms)	DO-214AA	1d	1a	Mic
6V6CA	-	SMB6.5CA	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 53.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
6V8	-	BZD27C6V8P	Zener diode	6.46..7.14V, Zzt=3Ω, Izt=100mA, 800mW	SOD-123FL	7d	1a	Pjt
6V8	-	BZY55-C6V8	Zener diode	6.46..7.14V, Izt=5mA, Zzt=8Ω, 500mW	0805	70d	2d	Tsc
6V8	-	CDZ55C6V8	Zener diode	6.46..7.14V, Zzt=8Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
6V8	-	CDZ55C6V8S	Zener diode	6.46..7.14V, Zzt=8Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
6V8	-	CTZ55C6V8	Zener diode	6.46..7.14V, Izt=5mA, Zzt=8Ω, 500mW	1206	70d	2d	Ctc
6V8	-	CZRNC55C6V8-G	Zener diode	6.46..7.14V, Zt=8Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
6V8	-	CZRSC55C6V8-G	Zener diode	6.46..7.14V, Zt=8Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
6V8	-	DFLZ6V8	Zener diode	6.8V±5%, Izt=100mA, Zzt<3Ω, 1W	SOD-123FL	7d	1d	Mco
6V8	-	MFPZ6V8	Zener diode	6.46..7.14V, Izt=100mA, Zzt=3Ω, 800mW	SOD-123FL	7d	1a	Ttr
6V8	-	P6SMBJ6V8	TVS	Vrwm=6.8V, Vbr=6.12..7.48V, 56A, 600W(1ms)	DO-214AA	1d	1n	Lif
6V8A	-	1.5SMC6.8A	TVS	Vrwm=5.8V, Vbr=6.45..7.14 V, Ipp=143A, 1500W(1ms)	DO-214AB	1d	2s	Lif
6V8A	-	1.5SMC6.8A	TVS	Vrwm=5.8V, Vbr=6.45..7.14 V, Ipp=143A, 1500W(1ms)	403	3d	2t	Ons
6V8A	-	1.5SMC6.8A	TVS	Vrwm=5.8V, Vbr=6.45..7.14 V, Ipp=143A, 1500W(1ms)	DO-214AB	1d	1k	Vs
6V8A	-	P4SMA6.8A	TVS	Vbr=6.45..7.14V, Vrwm=6.8V, 38.1A, 400W (1ms)	DO-214AC	1d	1k	Vs
6V8A	-	P6SMB6.8A	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 57.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
6V8A	-	P6SMB-6.8A	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 57.1A, 600W(1ms)	403A	3d	1s	Ons
6V8A	-	P6SMBJ6V8A	TVS	Vrwm=6.8V, Vbr=6.12..7.48V, 57A, 600W(1ms)	DO-214AA	1d	1n	Lif
6V8A	-	SMAJP4KE6.8A	TVS	Vrwm=5.80V, Vbr=6.45..7.14V, Ipp=39.0A, 400W(1ms)	DO-214AC	1d	1a	Mco
6V8A	-	SMBJP6KE6.8A	TVS	Vrwm=5.80V, Vbr=6.45..7.14V, Ipp=58.1A, 600W(1ms)	DO-214AA	1d	1a	Mco
6V8A	-	SMCJ1.5KE6.8A	TVS	Vrwm=5.80V, Vbr=6.45..7.14V, Ipp=144.8A, 1500W(1ms)	DO-214AB	1d	1a	Mco
6V8A	-	SZP6SMB-6.8A	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 57.1A, 600W(1ms)	403A	3d	1s	Ons
6V8A	-	TVP04A6V8A-G	TVS	Vbr=6.46..7.14V, Vrwm=5.8V, Ipp=38.10A, 400W(1ms)	DO-214AC	1d	2o	Cmc
6V8A	-	TVP06B6V8A-G	TVS	Vrwm=5.8V, Vbr=6.46..7.14V, Ipp=57.14A, 600W(1ms)	DO-214AA	1d	2o	Cmc
6V8B	-	BZT52B6V8	Zener diode	6.66..6.94V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tsc
6V8B	-	MMSZ6V8BW	Zener diode	6.66..6.94V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tac
6V8B	-	Z3SMB6.8B	Zener diode	6.46..7.14V, Izt=110mA, Zzt=2Ω, 3W	DO-214AA	1d	1a	Ttr
6V8C	-	1.5SMC6.8CA	TVS	Vrwm=5.8V, Vbr=6.45..7.14 V, Ipp=143A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
6V8C	-	1.5SMC6.8CA	TVS	Vrwm=5.8V, Vbr=6.45..7.14 V, Ipp=143A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
6V8C	-	1.5SMC6.8CA	TVS	Vrwm=5.8V, Vbr=6.45..7.14 V, Ipp=143A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
6V8C	-	P4SMA6.8CA	TVS	Vbr=6.45..7.14V, Vrwm=6.8V, 38.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1l	Vs
6V8C	-	P6SMB6.8CA	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 57.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
6V8C	-	P6SMBJ6V8C	TVS	Vrwm=6.8V, Vbr=6.12..7.48V, 56A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
6V8C	-	SMAJP4KE6.8CA	TVS	Vrwm=5.80V, Vbr=6.45..7.14V, Ipp=39.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
6V8C	-	SMBJP6KE6.8CA	TVS	Vrwm=5.80V, Vbr=6.45..7.14V, Ipp=58.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
6V8C	-	SMCJ1.5KE6.8CA	TVS	Vrwm=5.80V, Vbr=6.45..7.14V, Ipp=144.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
6V8C	-	TVP04A6V8CA-G	TVS	Vbr=6.46..7.14V, Vrwm=5.8V, Ipp=38.10A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
6V8C	-	TVP06B6V8ACA-G	TVS	Vrwm=5.8V, Vbr=6.46..7.14V, Ipp=57.14A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
6V8CA	-	P6SMBJ6V8CA	TVS	Vrwm=6.8V, Vbr=6.12..7.48V, 57A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
6V8Z	-	BZT52C6V8	Zener diode	6.46..7.14V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tsc
6V8Z	-	MMSZ6V8CW	Zener diode	6.46..7.14V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tac
6V8Z	-	TCMMSZ6V8	Zener diode	6.8V±5%, Izt=5mA, Zzt=14Ω, 500mW	SOD-123FL	7d	1a	Tac
6V8Z	-	ZGFM056V8C-MH	Zener diode	6.46..7.14V, Izt=5mA, Zzt=14Ω, 500mW	SOD-123	5d	1a	Pic
6W1	-	MM1ZB18H	Zener diode	17.64..18.36V, Izt=5mA, Zzt=45Ω, 500mW	SOD-123	5d	1a	Zow
6X1	-	MM1ZB20H	Zener diode	19.6..20.4V, Izt=5mA, Zzt=50Ω, 500mW	SOD-123	5d	1a	Zow
6Y	-	KDZ16VVY	Zener diode	15.85..16.51V, Izt=5mA, Zzt=18Ω, 100mW	VSC	7d	1a	Kec
6Y	-	MA355	C-diode	CATV-tuning, 32V, 2.5/2.9pF(25V)	SOD-123	5d	1a	Pan
6Y1	-	MM1ZB22H	Zener diode	21.56..22.44V, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1a	Zow
6Z	-	BZT52B4V3S	Zener diode	4.21..4.39V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1a	Tsc
6Z	-	MA373	C-diode	UHF-tuning, 32V, 0.84pF(25V)	SOD-123	5d	1a	Pan
6Z	-	MM3Z4V3B	Zener diode	4.21..4.39V, Zzt=84Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
6Z	-	MM3Z4V3BW	Zener diode	4.21..4.39V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1a	Tac
6Z	-	TCMM3Z4V3B	Zener diode	4.3V±2%, Izt=5mA, Zzt=84Ω, 200mW	SOD-323FL	7d	1a	Tac
6Z1	-	MM1ZB24H	Zener diode	23.52..24.48V, Izt=5mA, Zzt=60Ω, 500mW	SOD-123	5d	1a	Zow
7	-	1SS400GPT	Si-diode	Sw, 90V, 100mA, Vf<1.2V(100mA), 4ns	SOD-723	6d	1a	Chm
7	-	BA891	PIN-diode	VHF, TV-Band-Sw, 35V, 100mA, 715mW, 0.8pF	SOD-523	6d	1a	Phi
7	-	BAS170W	Si-diode	SBD, GP, Hi-sp, 70V, 70mA, Vf<1V(15mA), <100ps	SOD-323	5d	1a	Inf
7	-	BBY55-02V	C-diode	VCO-tuning, 16V, 20mA, 14..16pF(10..2V)	SC-79	6d	1u	Inf
7	-	CDZ3.6B	Zener diode	3.6V±2.5%, Izt=40mA, 1W	VMN	7d	1s	Rhm
7	-	HVU307	C-diode	VHF-tuning, 32.2/37.5pF(2V)	SOD-123	5d	1a	Ren
7	-	MA2S377	C-diode	VXO, VCXO, TCXO, 12V, 20mA, 2.8/1.1pF(2/10V), 0.4Ω(470MHz)	SOD-523	6d	1a	Pan

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
7	-	MAZS075	Zener diode	7..7.9V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
7	-	MMPZ5228SPT	Zener diode	3.822..3.987V, Izt=5mA, Zzt=90Ω, 225mW	SOD-323	5d	1a	Chm
7	-	MMSZ5248BPT	Zener diode	18V±5%, Izt=7mA, Zzt=21Ω, 225mW	SOD-523	6d	1a	Chm
7	-	SPE0571D72RG	ESDP-diode	Vrwm=5V, Vbr=6..8.5V, 7A, 250W(1ms)	SOD-723	7d	1a	Syn
7	au	CDZ5.6B	Zener diode	5.6V±2.5%, Izt=40mA, 1W	VMN	7d	1s	Rhm
7	ba	BBY55-03W	C-diode	VCO-tuning, 16V, 20mA, 14..16pF(10..2V)	SOD-323	5d	2	Inf
7-	-	MAZS0750M	Zener diode	7.29..7.67V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
7.	-	MMSZ5248SPT	Zener diode	18V±5%, Izt=7mA, Zzt=21Ω, 225mW	SOD-523	6d	1a	Chm
7.0	-	SMBG7.0	TVS	Vrwm=7.0V, Vbr=7.78..9.86V, 45.1A, 600W(1ms)	DO-215AA	5d	1a	Msc
7.0A	-	1SMC7.0A	TVS	Vbr=7.78..8.6V, Vrwm=7.0V, 125.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
7.0A	-	MMF7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, Ipp=16.7A, 200W(1ms)	SOD-123FL	7d	2m	Sst
7.0A	-	SMAJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, 33.3A, 400W(1ms)	DO-214AC	1d	1a	Sus
7.0A	-	SMBG7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, 50.0A, 600W(1ms)	DO-215AA	5d	1a	Msc
7.0A	-	SMBJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, 50.0A, 600W(1ms)	DO-214AA	1d	1a	Sus
7.0A	-	SMCJ7.0A	TVS	Vrwm=7V, Vbr=7.78..8.95V, 112.8A, 1500W(1ms)	DO-214AB	1d	1k	Sus
7.0A	-	SMF7.0A	TVS	Vbr=7.78..8.6V, Vrwm=7.0V, Ipp=16.7A, 200W(1ms)	SOD-123FL	7d	1a	Mco
7.0C	-	SMBG7.0C	TVS	Vrwm=7.0V, Vbr=7.78..9.86V, 45.1A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
7.0CA	-	1SMC7.0CA	TVS	Vbr=7.78..8.6V, Vrwm=7.0V, 125.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
7.0CA	-	MMF7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, Ipp=16.7A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
7.0CA	-	SMAJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, 33.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
7.0CA	-	SMBG7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, 50.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
7.0CA	-	SMBJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, 50.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
7.0CA	-	SMCJ7.0CA	TVS	Vrwm=7V, Vbr=7.78..8.95V, 112.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
7.0CA	-	SMF7.0CA	TVS	Vbr=7.78..8.6V, Vrwm=7.0V, Ipp=16.7A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
7.5	-	MAZ5075	Zener diode	7..7.9V, Zzt=6Ω(5mA), 500mW	MP2	11d	1a	Pan
7.5	-	MAZ80750H	Zener diode	7.51..7.89V, Zzt=20Ω(5mA), 150mW	SC-76	6d	1a	Pan
7.5	-	MAZY075	Zener diode	6.8..8.3V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
7.5	-	P4SMA7.5	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 36.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
7.5	-	SMBG7.5	TVS	Vrwm=7.5V, Vbr=8.33..10.67V, 42.0A, 600W(1ms)	DO-215AA	5d	1a	Msc
7.5	-	U1ZB7.5	Zener diode	6.8..8.3V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos
7.5A	-	1SMC7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 116.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
7.5A	-	MMF7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, Ipp=15.5A, 200W(1ms)	SOD-123FL	7d	2m	Sst
7.5A	-	P4SMA7.5A	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 37.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
7.5A	-	P6SMB7.5A	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 53.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
7.5A	-	SMAJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 31.0A, 400W(1ms)	DO-214AC	1d	1a	Sus
7.5A	-	SMBG7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 46.5A, 600W(1ms)	DO-215AA	5d	1a	Msc
7.5A	-	SMBJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 46.5A, 600W(1ms)	DO-214AA	1d	1a	Sus
7.5A	-	SMCJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 104.9A, 1500W(1ms)	DO-214AB	1d	1k	Sus
7.5A	-	SMF7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, Ipp=15.5A, 200W(1ms)	SOD-123FL	7d	1a	Mco
7.5B	-	HZF7.5BP	Zener diode	7.5V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
7.5B	-	PTZ7.5B	Zener diode	7.5V±10%, Izt=40mA, 1W	DO-214AC	1d	1a	Rhm
7.5C	-	HZF7.5CP	Zener diode	7.5V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
7.5C	-	P4SMA7.5C	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 36.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
7.5C	-	SMBG7.5C	TVS	Vrwm=7.5V, Vbr=8.33..10.67V, 42.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
7.5CA	-	1SMC7.5CA	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 116.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
7.5CA	-	MMF7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, Ipp=15.5A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
7.5CA	-	P4SMA7.5CA	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 37.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
7.5CA	-	P6SMB7.5CA	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 53.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
7.5CA	-	SMAJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 31.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
7.5CA	-	SMBG7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 46.5A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
7.5CA	-	SMBJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 46.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
7.5CA	-	SMCJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 104.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
7.5CA	-	SMF7.5CA	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, Ipp=15.5A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
7.5G	-	ZD7.5G-CA2	Zener diode	7.5V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
7.5G	-	ZD7.5G-CB2	Zener diode	7.5V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
7.5L	-	ZD7.5L-CA2	Zener diode	7.5V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
7.5L	-	ZD7.5L-CB2	Zener diode	7.5V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
7/7	br	SD15C	TVS	Vrwm=15.0V, Vbr=16.7..24V, Ipp=15A, 350W(1ms), Bidir.	SOD-323	5ba	1e	Smt
7^	-	MAZS0750H	Zener diode	7.51..7.89V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
7^5	-	MAZ80750H	Zener diode	7.51..7.89V, Zzt=20Ω(5mA), 150mW	SC-76	6d	1a	Pan
7^5	-	MAZ8075GHL	Zener diode	7.51..7.89V, Zzt=20Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
7_	-	MAZS0750L	Zener diode	7.07..7.43V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
7_5	-	MAZ80750L	Zener diode	7.07..7.43V, Zzt=20Ω(5mA), 150mW	SC-76	6d	1a	Pan
7_5	-	MAZ8075GLL	Zener diode	7.07..7.43V, Zzt=20Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
7•5	-	RKZ7.5B2KG	Zener diode	7.28..7.60V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	2e	Ren
7•5	-	RKZ7.5B2KJ	Zener diode	7.28..7.60V, Izt=5mA, Zzt=30Ω, 150mW	UFP	7d	2e	Ren
7•5	am	HZU7.5B3	Zener diode	7.52..7.84V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
7•5	an	HZU7.5B2	Zener diode	7.28..7.60V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
7•5	ao	HZU7.5B1	Zener diode	7.06..7.36V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
70	-	SMBG70	TVS	Vrwm=70V, Vbr=77.8..98.6V, 4.8A, 600W(1ms)	DO-215AA	5d	1a	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
701	-	MA2P701	Si-diode	HFR, 20V, 1A, Vf<0.55V(1A), 210pF, 14ns	Mini Power	11d	1a	Pan
701A	-	MA2P701A	Si-diode	HFR, 40V, 1A, Vf<0.55V(1A), 210pF, 14ns	Mini Power	11d	1a	Pan
70A	-	1SMC70A	TVS	Vbr=77.8..86V, Vrwm=70V, 13.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
70A	-	MMF70A	TVS	Vrwm=70V, Vbr=77.8..89.5V, Ipp=1.5A, 200W(1ms)	SOD-123FL	7d	2m	Sst
70A	-	SMAJ70A	TVS	Vrwm=70V, Vbr=77.8..86.0V, 3.5A, 400W(1ms)	DO-214AC	1d	1a	Sus
70A	-	SMBG70A	TVS	Vrwm=70V, Vbr=77.8..89.5V, 5.3A, 600W(1ms)	DO-215AA	5d	1a	Msc
70A	-	SMBJ70A	TVS	Vrwm=70V, Vbr=77.8..89.5V, 5.3A, 600W(1ms)	DO-214AA	1d	1a	Sus
70A	-	SMCJ70A	TVS	Vrwm=70V, Vbr=77.8..89.5V, 12A, 1500W(1ms)	DO-214AB	1d	1k	Sus
70A	-	SMF70A	TVS	Vbr=77.8..86V, Vrwm=70V, Ipp=1.5A, 200W(1ms)	SOD-123FL	7d	1a	Mco
70A	-	UMA70A	TVS	Vrwm=70V, Vbr=77.8..113V, 4.4A, 500W(1ms)	UltraMite	14d	1v	Msc
70B	-	MMHZ5270BPT	Zener diode	86.45..95.55V, Izt=1.4mA, Zzt=400Ω, 225mW	SOD-123	5d	1a	Chm
70B	-	SMC5370B	Zener diode	56.0V±5%, Zzt=35.0(20.0mA), Izm=86.0mA, 5W	DO-214AB	1d	1a	Ers
70C	-	SMBG70C	TVS	Vrwm=70V, Vbr=77.8..98.6V, 4.8A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
70CA	-	1SMC70CA	TVS	Vbr=77.8..86V, Vrwm=70V, 13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
70CA	-	MMF70CA	TVS	Vrwm=70V, Vbr=77.8..89.5V, Ipp=1.5A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
70CA	-	SMAJ70CA	TVS	Vrwm=70V, Vbr=77.8..86V, 3.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
70CA	-	SMBG70CA	TVS	Vrwm=70V, Vbr=77.8..89.5V, 5.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
70CA	-	SMBJ70CA	TVS	Vrwm=70V, Vbr=77.8..89.5V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
70CA	-	SMCJ70CA	TVS	Vrwm=70V, Vbr=77.8..89.5V, 12A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
70CA	-	SMF70CA	TVS	Vbr=77.8..86V, Vrwm=70V, Ipp=1.5A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
70CA	-	UMA70CA	TVS	Vrwm=70V, Vbr=77.8..113V, 4.4A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
70DPH	-	BYG70D	Si-diode	Fast, Soft-recovery, 200V, 1A, Vf<2.1V(1A), 30ns	DO-214AC	1d	1a	Phi
70GPH	-	BYG70G	Si-diode	Fast, Soft-recovery, 400V, 1A, Vf<2.1V(1A), 30ns	DO-214AC	1d	1a	Phi
70JPH	-	BYG70J	Si-diode	Fast, Soft-recovery, 600V, 1A, Vf<2.1V(1A), 30ns	DO-214AC	1d	1a	Phi
70S	-	MMHZ5270SPT	Zener diode	89.18..92.82V, Izt=1.4mA, Zzt=400Ω, 225mW	SOD-123	5d	1a	Chm
70V	-	SMA70	TVS	Vbr=77.8..95.1V, Vrwm=70.0V, 2.4A, 300W(1ms)	DO-214AC	1d	1a	Mic
70V	-	SMB70	TVS	Vbr=77.8..95.1V, Vrwm=70V, 4.8A, 600W(1ms)	DO-214AA	1d	1a	Mic
70V	-	SMC70	TVS	Vbr=77.8..95.1V, Vrwm=70V, 12A, 1500W(1ms),	DO-214AB	1d	1a	Mic
70VA	-	SMA70A	TVS	Vbr=77.8..86V, Vrwm=70.0V, 2.7A, 300W(1ms)	DO-214AC	1d	1a	Mic
70VA	-	SMB70A	TVS	Vbr=77.8..86V, Vrwm=70V, 5.3A, 600W(1ms)	DO-214AA	1d	1a	Mic
70VA	-	SMC70A	TVS	Vbr=77.8..86V, Vrwm=70V, 13.3A, 1500W(1ms),	DO-214AB	1d	1a	Mic
70VC	-	SMA70C	TVS	Vbr=77.8..95.1V, Vrwm=70.0V, 2.4A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
70VC	-	SMB70C	TVS	Vbr=77.8..95.1V, Vrwm=70V, 4.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
70VC	-	SMC70C	TVS	Vbr=77.8..95.1V, Vrwm=70V, 12A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
70VCA	-	SMA70CA	TVS	Vbr=77.8..86V, Vrwm=70.0V, 2.7A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
70VCA	-	SMB70CA	TVS	Vbr=77.8..86V, Vrwm=70V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
70VCA	-	SMC70CA	TVS	Vbr=77.8..86V, Vrwm=70V, 13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
71B	-	SMC5371B	Zener diode	60.0V±5%, Zzt=40.0(20.0mA), Izm=79.0mA, 5W	DO-214AB	1d	1a	Ers
72	-	EDZ3.9B	Zener diode	3.89..4.16V, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Rhm
72	-	EDZV3.9B	Zener diode	3.89..4.16V, Izt=5.0mA, Zzt=100Ω, 150mW	SOD-523	6d	2v	Rhm
72	-	FDZ3.9EV	Zener diode	3.890..4.160V, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Fis
72	-	FDZ3.9VT	Zener diode	3.890..4.160V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Fis
72	-	GDZ3V9B-V	Zener diode	3.89..4.16V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	2m	Vs
72	-	LBZT52B3V9T1G	Zener diode	3.89..4.16V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
72	-	LEDZ3.9BT1G	Zener diode	3.89..4.16V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
72	-	LUDZS3.9BT1G	Zener diode	3.89..4.16V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
72	-	TDZ3.9B	Zener diode	3.9V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
72	-	UDZS3.9B	Zener diode	3.89..4.16V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Wtr
72	-	UDZS3.9B	Zener diode	3.9V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
72	-	UDZV3.9B	Zener diode	3.89..4.16V, Izt=5.0mA, Zzt=100Ω, 200mW	SOD-323	5d	2v	Rhm
72	-	VDZS3.9B	Zener diode	3.9V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
728A	-	1SMA4728A	Zener diode	3.3V±10%, Izt=76.0mA, Zzt=10Ω, 1W	DO-214AC	1d	1a	Eic
728A	-	SMAJ4728A	Zener diode	3.3V±5%, Izt=76mA, Zzt=10Ω, 1W	DO-214AC	1d	1w	Mco
728B	-	Z1SMA4728A	Zener diode	3.14..3.47V, Izt=76mA, 1W	SMA	1d	1ab	Ttr
729A	-	1SMA4729A	Zener diode	3.6V±10%, Izt=69.0mA, Zzt=10Ω, 1W	DO-214AC	1d	1a	Eic
729A	-	SMAJ4729A	Zener diode	3.6V±5%, Izt=69mA, Zzt=10Ω, 1W	DO-214AC	1d	1w	Mco
729B	-	Z1SMA4729A	Zener diode	3.42..3.78V, Izt=69mA, 1W	SMA	1d	1ab	Ttr
72B	-	SMC5372B	Zener diode	62.0V±5%, Zzt=42.0(20.0mA), Izm=76.0mA, 5W	DO-214AB	1d	1a	Ers
73	-	BAS70-02W	Si-diode	SBD, GP, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SCD-80	6d	1u	Inf
730A	-	1SMA4730A	Zener diode	3.9V±10%, Izt=64.0mA, Zzt=9Ω, 1W	DO-214AC	1d	1a	Eic
730A	-	SMAJ4730A	Zener diode	3.9V±5%, Izt=64mA, Zzt=9Ω, 1W	DO-214AC	1d	1w	Mco
730B	-	Z1SMA4730A	Zener diode	3.71..4.10V, Izt=64mA, 1W	SMA	1d	1ab	Ttr
731A	-	1SMA4731A	Zener diode	4.3V±10%, Izt=58.0mA, Zzt=9Ω, 1W	DO-214AC	1d	1a	Eic
731A	-	SMAJ4731A	Zener diode	4.3V±5%, Izt=58mA, Zzt=9Ω, 1W	DO-214AC	1d	1w	Mco
731B	-	Z1SMA4731A	Zener diode	4.09..4.52V, Izt=58mA, 1W	SMA	1d	1ab	Ttr
732A	-	1SMA4732A	Zener diode	4.7V±10%, Izt=53.0mA, Zzt=8Ω, 1W	DO-214AC	1d	1a	Eic
732A	-	SMAJ4732A	Zener diode	4.7V±5%, Izt=53mA, Zzt=8Ω, 1W	DO-214AC	1d	1w	Mco
732B	-	1SMA4732	Zener diode	4.7V±10%, Izt=53.0mA, Zzt=8Ω, 1W	DO-214AC	1d	1a	Cdi
732B	-	Z1SMA4732A	Zener diode	4.47..4.94V, Izt=53mA, 1W	SMA	1d	1ab	Ttr
733A	-	1SMA4733A	Zener diode	5.1V±10%, Izt=49.0mA, Zzt=7Ω, 1W	DO-214AC	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
733A	-	SMAJ4733A	Zener diode	5.1V±5%, Izt=49mA, Zzt=7Ω, 1W	DO-214AC	1d	1w	Mco
733B	-	1SMA4733	Zener diode	5.1V±10%, Izt=49.0mA, Zzt=7Ω, 1W	DO-214AC	1d	1a	Cdi
733B	-	Z1SMA4733A	Zener diode	4.85..5.36V, Izt=49mA, 1W	SMA	1d	1ab	Ttr
734A	-	1SMA4734A	Zener diode	5.6V±10%, Izt=45.0mA, Zzt=5Ω, 1W	DO-214AC	1d	1a	Eic
734A	-	SMAJ4734A	Zener diode	5.6V±5%, Izt=45mA, Zzt=5Ω, 1W	DO-214AC	1d	1w	Mco
734B	-	1SMA4734	Zener diode	5.6V±10%, Izt=45.0mA, Zzt=5Ω, 1W	DO-214AC	1d	1a	Cdi
734B	-	Z1SMA4734A	Zener diode	5.32..5.88V, Izt=45mA, 1W	SMA	1d	1ab	Ttr
735A	-	1SMA4735A	Zener diode	6.2V±10%, Izt=41.0mA, Zzt=2Ω, 1W	DO-214AC	1d	1a	Eic
735A	-	SMAJ4735A	Zener diode	6.2V±5%, Izt=41mA, Zzt=2Ω, 1W	DO-214AC	1d	1w	Mco
735B	-	1SMA4735	Zener diode	6.2V±10%, Izt=41.0mA, Zzt=2Ω, 1W	DO-214AC	1d	1a	Cdi
735B	-	Z1SMA4735A	Zener diode	5.89..6.51V, Izt=41mA, 1W	SMA	1d	1ab	Ttr
736A	-	1SMA4736A	Zener diode	6.8V±10%, Izt=37.0mA, Zzt=3.5Ω, 1W	DO-214AC	1d	1a	Eic
736A	-	SMAJ4736A	Zener diode	6.8V±5%, Izt=37mA, Zzt=3.5Ω, 1W	DO-214AC	1d	1w	Mco
736B	-	1SMA4736	Zener diode	6.8V±10%, Izt=37.0mA, Zzt=3.5Ω, 1W	DO-214AC	1d	1a	Cdi
736B	-	Z1SMA4736A	Zener diode	6.46..7.14V, Izt=37mA, 1W	SMA	1d	1ab	Ttr
737A	-	1SMA4737A	Zener diode	7.5V±10%, Izt=34.0mA, Zzt=4Ω, 1W	DO-214AC	1d	1a	Eic
737A	-	SMAJ4737A	Zener diode	7.5V±5%, Izt=34mA, Zzt=4.0Ω, 1W	DO-214AC	1d	1w	Mco
737B	-	1SMA4737	Zener diode	7.5V±10%, Izt=34.0mA, Zzt=4Ω, 1W	DO-214AC	1d	1a	Cdi
737B	-	Z1SMA4737A	Zener diode	7.13..7.88V, Izt=34mA, 1W	SMA	1d	1ab	Ttr
738A	-	1SMA4738A	Zener diode	8.2V±10%, Izt=31.0mA, Zzt=4.5Ω, 1W	DO-214AC	1d	1a	Eic
738A	-	SMAJ4738A	Zener diode	8.2V±5%, Izt=31mA, Zzt=4.5Ω, 1W	DO-214AC	1d	1w	Mco
738B	-	1SMA4738	Zener diode	8.2V±10%, Izt=31.0mA, Zzt=4.5Ω, 1W	DO-214AC	1d	1a	Cdi
738B	-	Z1SMA4738A	Zener diode	7.79..8.61V, Izt=31mA, 1W	SMA	1d	1ab	Ttr
739A	-	1SMA4739A	Zener diode	9.1V±10%, Izt=28.0mA, Zzt=5Ω, 1W	DO-214AC	1d	1a	Eic
739A	-	SMAJ4739A	Zener diode	9.1V±5%, Izt=28mA, Zzt=5.0Ω, 1W	DO-214AC	1d	1w	Mco
739B	-	1SMA4739	Zener diode	9.1V±10%, Izt=28.0mA, Zzt=5Ω, 1W	DO-214AC	1d	1a	Cdi
739B	-	Z1SMA4739A	Zener diode	8.65..9.56V, Izt=28mA, 1W	SMA	1d	1ab	Ttr
73B	-	SMC5373B	Zener diode	68.0V±5%, Zzt=44.0(20.0mA), Izm=70.0mA, 5W	DO-214AB	1d	1a	Ers
740A	-	1SMA4740A	Zener diode	10V±10%, Izt=25.0mA, Zzt=7Ω, 1W	DO-214AC	1d	1a	Eic
740A	-	SMAJ4740A	Zener diode	10V±5%, Izt=25mA, Zzt=7Ω, 1W	DO-214AC	1d	1w	Mco
740B	-	1SMA4740	Zener diode	10V±10%, Izt=25.0mA, Zzt=7Ω, 1W	DO-214AC	1d	1a	Cdi
740B	-	Z1SMA4740A	Zener diode	9.50..10.50V, Izt=25mA, 1W	SMA	1d	1ab	Ttr
741A	-	1SMA4741A	Zener diode	11V±10%, Izt=23.0mA, Zzt=8Ω, 1W	DO-214AC	1d	1a	Eic
741A	-	SMAJ4741A	Zener diode	11V±5%, Izt=23mA, Zzt=8Ω, 1W	DO-214AC	1d	1w	Mco
741B	-	1SMA4741	Zener diode	11V±5%, Izt=23.0mA, Zzt=8Ω, 1W	DO-214AC	1d	1a	Trs
741B	-	Z1SMA4741A	Zener diode	10.45..11.55V, Izt=23mA, 1W	SMA	1d	1ab	Ttr
742A	-	1SMA4742A	Zener diode	12V±10%, Izt=21.0mA, Zzt=9Ω, 1W	DO-214AC	1d	1a	Eic
742A	-	SMAJ4742A	Zener diode	12V±5%, Izt=21mA, Zzt=9Ω, 1W	DO-214AC	1d	1w	Mco
742B	-	1SMA4742	Zener diode	12V±5%, Izt=21.0mA, Zzt=9Ω, 1W	DO-214AC	1d	1a	Trs
742B	-	Z1SMA4742A	Zener diode	11.40..12.60V, Izt=21mA, 1W	SMA	1d	1ab	Ttr
743A	-	1SMA4743A	Zener diode	13V±10%, Izt=19.0mA, Zzt=10Ω, 1W	DO-214AC	1d	1a	Eic
743A	-	SMAJ4743A	Zener diode	13V±5%, Izt=19mA, Zzt=10Ω, 1W	DO-214AC	1d	1w	Mco
743B	-	1SMA4743	Zener diode	13V±5%, Izt=19.0mA, Zzt=10Ω, 1W	DO-214AC	1d	1a	Trs
743B	-	Z1SMA4743A	Zener diode	12.35..13.65V, Izt=19mA, 1W	SMA	1d	1ab	Ttr
744A	-	1SMA4744A	Zener diode	15V±10%, Izt=17.0mA, Zzt=14Ω, 1W	DO-214AC	1d	1a	Eic
744A	-	SMAJ4744A	Zener diode	15V±5%, Izt=17mA, Zzt=14Ω, 1W	DO-214AC	1d	1w	Mco
744B	-	1SMA4744	Zener diode	15V±5%, Izt=17.0mA, Zzt=14Ω, 1W	DO-214AC	1d	1a	Trs
744B	-	Z1SMA4744A	Zener diode	14.25..15.75V, Izt=17mA, 1W	SMA	1d	1ab	Ttr
745A	-	1SMA4745A	Zener diode	16V±10%, Izt=15.5mA, Zzt=16Ω, 1W	DO-214AC	1d	1a	Eic
745A	-	SMAJ4745A	Zener diode	16V±5%, Izt=15.5mA, Zzt=16Ω, 1W	DO-214AC	1d	1w	Mco
745B	-	1SMA4745	Zener diode	16V±5%, Izt=15.5mA, Zzt=16Ω, 1W	DO-214AC	1d	1a	Trs
745B	-	Z1SMA4745A	Zener diode	15.20..16.80V, Izt=15.5mA, 1W	SMA	1d	1ab	Ttr
746A	-	1SMA4746A	Zener diode	18V±10%, Izt=14.0mA, Zzt=20Ω, 1W	DO-214AC	1d	1a	Eic
746A	-	SMAJ4746A	Zener diode	18V±5%, Izt=14mA, Zzt=20Ω, 1W	DO-214AC	1d	1w	Mco
746B	-	1SMA4746	Zener diode	18V±5%, Izt=14.0mA, Zzt=20Ω, 1W	DO-214AC	1d	1a	Trs
746B	-	Z1SMA4746A	Zener diode	17.10..18.90V, Izt=14mA, 1W	SMA	1d	1ab	Ttr
747A	-	1SMA4747A	Zener diode	20V±10%, Izt=12.5mA, Zzt=22Ω, 1W	DO-214AC	1d	1a	Eic
747A	-	SMAJ4747A	Zener diode	20V±5%, Izt=12.5mA, Zzt=22Ω, 1W	DO-214AC	1d	1w	Mco
747B	-	1SMA4747	Zener diode	20V±5%, Izt=12.5mA, Zzt=22Ω, 1W	DO-214AC	1d	1a	Trs
747B	-	Z1SMA4747A	Zener diode	19.0..21.0V, Izt=12.5mA, 1W	SMA	1d	1ab	Ttr
748A	-	1SMA4748A	Zener diode	22V±10%, Izt=11.5mA, Zzt=23Ω, 1W	DO-214AC	1d	1a	Eic
748A	-	SMAJ4748A	Zener diode	22V±5%, Izt=11.5mA, Zzt=23Ω, 1W	DO-214AC	1d	1w	Mco
748B	-	1SMA4748	Zener diode	22V±5%, Izt=11.5mA, Zzt=23Ω, 1W	DO-214AC	1d	1a	Trs
748B	-	Z1SMA4748A	Zener diode	20.90..23.10V, Izt=11.5mA, 1W	SMA	1d	1ab	Ttr
749A	-	1SMA4749A	Zener diode	24V±10%, Izt=10.5mA, Zzt=25Ω, 1W	DO-214AC	1d	1a	Eic
749A	-	SMAJ4749A	Zener diode	24V±5%, Izt=10.5mA, Zzt=25Ω, 1W	DO-214AC	1d	1w	Mco
749B	-	1SMA4749	Zener diode	24V±5%, Izt=10.5mA, Zzt=25Ω, 1W	DO-214AC	1d	1a	Trs
749B	-	Z1SMA4749A	Zener diode	22.80..25.20V, Izt=10.5mA, 1W	SMA	1d	1ab	Ttr
74B	-	SMC5374B	Zener diode	75.0V±5%, Zzt=45.0(20.0mA), Izm=63.0mA, 5W	DO-214AB	1d	1a	Ers
75	-	BZX584B4V7	Zener diode	4.61..4.79V, Izt=5mA, Zzt=80Ω, 200mW	SOD-523FL	7d	1a	Tac

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
75	-	CDZ55C75	Zener diode	71.25..78.75V, Zzt=250Ω, Izt=2.25mA, 500mW	1206	70d	2d	Crp
75	-	CDZ55C75S	Zener diode	71.25..78.75V, Zzt=250Ω, Izt=2.25mA, 500mW	0805	70d	2d	Crp
75	-	CDZ55C75T	Zener diode	71.25..78.75V, Zzt=250Ω, Izt=2.25mA, 200mW	0603	70d	2d	Crp
75	-	CZRNC55C75-G	Zener diode	71.25..78.75V, Zt=250Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
75	-	EDZ20B	Zener diode	19.52..20.39V, Izt=5mA, Zzt=85Ω, 150mW	SOD-523	6d	1a	Rhm
75	-	EDZV20B	Zener diode	19.52..20.39V, Izt=5.0mA, Zzt=85Ω, 150mW	SOD-523	6d	2v	Rhm
75	-	FDZ20EV	Zener diode	19.520..20.390V, Izt=5mA, Zzt=85Ω, 150mW	SOD-523	6d	1a	Fis
75	-	FDZ20VT	Zener diode	19.520..20.390V, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	1a	Fis
75	-	GDZ3V9B-V-G	Zener diode	3.89..4.16V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	2m	Vs
75	-	HZC7.5	Zener diode	7.5V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
75	-	HZU7.5G	Zener diode	7.06..7.84V, Izt=5mA, 200mW	SOD-323	5d	1a	Ren
75	-	KDZ7.5EV	Zener diode	7..7.9 5V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
75	-	KDZ7.5V	Zener diode	7..7.9V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
75	-	LBZT52B20T1G	Zener diode	19.52..22.39V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
75	-	LEDZ20BT1G	Zener diode	19.52..20.39V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
75	-	LUDZS20BT1G	Zener diode	19.52..20.39V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
75	-	MM5Z4V7B	Zener diode	4.61..4.79V, Izt=5mA, Zzt=80Ω, 200mW	SOD-523FL	7d	1a	Tac
75	-	MMPZ5267SPT	Zener diode	73.50..76.50V, Izt=1.7mA, Zzt=270Ω, 225mW	SOD-323	5d	1a	Chm
75	-	P4SMA75	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 3.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
75	-	P6SMBJ75	TVS	Vrwm=75V, Vbr=67.5..82.5V, 5.5A, 600W(1ms)	DO-214AA	1d	1n	Lif
75	-	SMBG75	TVS	Vrwm=75V, Vbr=83.3..105.7V, 4.5A, 600W(1ms)	DO-215AA	5d	1a	Msc
75	-	SML4761	Zener diode	75V±5%, Izt=3.3mA, Zzt=175Ω, 1W	DO-214AC	1d	1k	Vs
75	-	TDZ20B	Zener diode	20V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
75	-	TZD7.5WS	Zener diode	7.0..7.90V, Izt=5mA, Zzt=23Ω, 200mW	SOD-323	5d	1a	Ttr
75	-	TZD7.5WT	Zener diode	7.0..7.90V, Izt=5mA, Zzt=23Ω, 150mW	SOD-523	6d	1a	Ttr
75	-	U1ZB75	Zener diode	67.5..82.5V, Izt=4mA, 1W	3-4D1A	1d	2fa	Tos
75	-	UDZS20B	Zener diode	19.52..20.39V, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	1a	Wtr
75	-	UDZS20B	Zener diode	20V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
75	-	UDZV20B	Zener diode	19.52..20.39V, Izt=5.0mA, Zzt=85Ω, 200mW	SOD-323	5d	2v	Rhm
75	-	USFZ7.5V	Zener diode	7.5V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
75	-	VDZS20B	Zener diode	20V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
75	ax	CRY75	Zener diode	6.8..8.3V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
7-5	-	MAZ80750M	Zener diode	7.29..7.67V, Zzt=20Ω(5mA), 150mW	SC-76	6d	1a	Pan
7-5	-	MAZ8075GML	Zener diode	7.29..7.67V, Zzt=20Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
75•	-	TZD7.5YWS	Zener diode	7.28..7.60V, Izt=5mA, Zzt=23Ω, 200mW	SOD-323	5d	1a	Ttr
75•	-	TZD7.5YWT	Zener diode	7.28..7.60V, Izt=5mA, Zzt=23Ω, 150mW	SOD-523	6d	1a	Ttr
750A	-	1SMA4750A	Zener diode	27V±10%, Izt=9.5mA, Zzt=35Ω, 1W	DO-214AC	1d	1a	Eic
750A	-	SMAJ4750A	Zener diode	27V±5%, Izt=9.5mA, Zzt=35Ω, 1W	DO-214AC	1d	1w	Mco
750B	-	1SMA4750	Zener diode	27V±5%, Izt=9.5mA, Zzt=35Ω, 1W	DO-214AC	1d	1a	Trs
750B	-	Z1SMA4750A	Zener diode	25.65..28.35V, Izt=9.5mA, 1W	SMA	1d	1ab	Ttr
751A	-	1SMA4751A	Zener diode	30V±10%, Izt=8.5mA, Zzt=40Ω, 1W	DO-214AC	1d	1a	Eic
751A	-	SMAJ4751A	Zener diode	30V±5%, Izt=8.5mA, Zzt=40Ω, 1W	DO-214AC	1d	1w	Mco
751B	-	1SMA4751	Zener diode	30V±5%, Izt=8.5mA, Zzt=40Ω, 1W	DO-214AC	1d	1a	Trs
751B	-	Z1SMA4751A	Zener diode	28.50..31.50V, Izt=8.5mA, 1W	SMA	1d	1ab	Ttr
752A	-	1SMA4752A	Zener diode	33V±10%, Izt=7.5mA, Zzt=45Ω, 1W	DO-214AC	1d	1a	Eic
752A	-	SMAJ4752A	Zener diode	33V±5%, Izt=7.5mA, Zzt=45Ω, 1W	DO-214AC	1d	1w	Mco
752B	-	1SMA4752	Zener diode	33V±5%, Izt=7.5mA, Zzt=45Ω, 1W	DO-214AC	1d	1a	Trs
752B	-	Z1SMA4752A	Zener diode	31.35..34.65V, Izt=7.5mA, 1W	SMA	1d	1ab	Ttr
753A	-	1SMA4753A	Zener diode	36V±10%, Izt=7.0mA, Zzt=50Ω, 1W	DO-214AC	1d	1a	Eic
753A	-	SMAJ4753A	Zener diode	36V±5%, Izt=7.0mA, Zzt=50Ω, 1W	DO-214AC	1d	1w	Mco
753B	-	1SMA4753	Zener diode	36V±5%, Izt=7.0mA, Zzt=50Ω, 1W	DO-214AC	1d	1a	Trs
753B	-	Z1SMA4753A	Zener diode	34.20..37.80V, Izt=7mA, 1W	SMA	1d	1ab	Ttr
754A	-	1SMA4754A	Zener diode	39V±10%, Izt=6.5mA, Zzt=60Ω, 1W	DO-214AC	1d	1a	Eic
754A	-	SMAJ4754A	Zener diode	39V±5%, Izt=6.5mA, Zzt=60Ω, 1W	DO-214AC	1d	1w	Mco
754B	-	1SMA4754	Zener diode	39V±5%, Izt=6.5mA, Zzt=60Ω, 1W	DO-214AC	1d	1a	Trs
754B	-	Z1SMA4754A	Zener diode	37.05..40.95V, Izt=6.5mA, 1W	SMA	1d	1ab	Ttr
755A	-	1SMA4755A	Zener diode	43V±10%, Izt=6.0mA, Zzt=70Ω, 1W	DO-214AC	1d	1a	Eic
755A	-	SMAJ4755A	Zener diode	43V±5%, Izt=6.0mA, Zzt=70Ω, 1W	DO-214AC	1d	1w	Mco
755B	-	1SMA4755	Zener diode	43V±5%, Izt=6.0mA, Zzt=70Ω, 1W	DO-214AC	1d	1a	Trs
755B	-	Z1SMA4755A	Zener diode	40.85..45.15V, Izt=6mA, 1W	SMA	1d	1ab	Ttr
756A	-	1SMA4756A	Zener diode	47V±10%, Izt=5.5mA, Zzt=80Ω, 1W	DO-214AC	1d	1a	Eic
756A	-	SMAJ4756A	Zener diode	47V±5%, Izt=5.5mA, Zzt=80Ω, 1W	DO-214AC	1d	1w	Mco
756B	-	1SMA4756	Zener diode	47V±5%, Izt=5.5mA, Zzt=80Ω, 1W	DO-214AC	1d	1a	Trs
756B	-	Z1SMA4756A	Zener diode	44.65..49.35V, Izt=5.5mA, 1W	SMA	1d	1ab	Ttr
757A	-	1SMA4757A	Zener diode	51V±10%, Izt=5mA, Zzt=95Ω, 1W	DO-214AC	1d	1a	Eic
757A	-	SMAJ4757A	Zener diode	51V±5%, Izt=5.0mA, Zzt=95Ω, 1W	DO-214AC	1d	1w	Mco
757B	-	1SMA4757	Zener diode	51V±5%, Izt=5mA, Zzt=95Ω, 1W	DO-214AC	1d	1a	Trs
757B	-	Z1SMA4757A	Zener diode	48.45..53.55V, Izt=5mA, 1W	SMA	1d	1ab	Ttr
758A	-	1SMA4758A	Zener diode	56V±10%, Izt=4.5mA, Zzt=110Ω, 1W	DO-214AC	1d	1a	Eic
758A	-	SMAJ4758A	Zener diode	56V±5%, Izt=4.5mA, Zzt=110Ω, 1W	DO-214AC	1d	1w	Mco

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
758B	-	1SMA4758	Zener diode	56V±5%, Izt=4.5mA, Zzt=110Ω, 1W	DO-214AC	1d	1a	Trs
758B	-	Z1SMA4758A	Zener diode	53.20..58.80V, Izt=4.5mA, 1W	SMA	1d	1ab	Ttr
759A	-	1SMA4759A	Zener diode	62V±10%, Izt=4.0mA, Zzt=125Ω, 1W	DO-214AC	1d	1a	Eic
759A	-	SMAJ4759A	Zener diode	62V±5%, Izt=4.0mA, Zzt=125Ω, 1W	DO-214AC	1d	1w	Mco
759B	-	1SMA4759	Zener diode	62V±5%, Izt=4.0mA, Zzt=125Ω, 1W	DO-214AC	1d	1a	Trs
759B	-	Z1SMA4759A	Zener diode	58.90..65.10V, Izt=4mA, 1W	SMA	1d	1ab	Ttr
75A	-	1.5SMC110A	TVS	Vrwm=94V, Vbr=105..116V, Ipp=9.9A, 1500W(1ms)	DO-214AB	1d	1a	Fee
75A	-	1.5SMC75A	TVS	Vrwm=64.1V, Vbr=71.3..78.8V, Ipp=14.6A, 1500W(1ms)	403	3d	2t	Ons
75A	-	1.5SMC75A	TVS	Vrwm=64.1V, Vbr=71.3..78.8V, Ipp=14.6A, 1500W(1ms)	DO-214AB	1d	1b	Mde
75A	-	1.5SMC75A	TVS	Vrwm=64.1V, Vbr=71.3..78.8V, Ipp=14.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
75A	-	1.5SMC75A	TVS	Vrwm=64.1V, Vbr=71.3..78.8V, Ipp=14.6A, 1500W(1ms)	DO-214AB	1d	2s	Lif
75A	-	1SMC75A	TVS	Vbr=83.3..92.1V, Vrwm=75V, 12.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
75A	-	MMF75A	TVS	Vrwm=75V, Vbr=83.3..95.8V, Ipp=1.4A, 200W(1ms)	SOD-123FL	7d	2m	Sst
75A	-	P4SMA75A	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 400W(1ms)	DO-214AC	1d	1a	Eic
75A	-	P4SMA75A	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 400W(1ms)	DO-214AC	1d	1k	Vs
75A	-	P6SMB75A	TVS	Vrwm=75V, Vbr=71.3..78.8V, 5.8A, 600W(1ms)	403A	3d	1s	Ons
75A	-	P6SMB75A	TVS	Vrwm=75V, Vbr=71.3..78.8V, 5.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
75A	-	P6SMBJ75A	TVS	Vrwm=75V, Vbr=67.5..82.5V, 5.8A, 600W(1ms)	DO-214AA	1d	1n	Lif
75A	-	SMAJ75A	TVS	Vrwm=75V, Vbr=83.3..92.1V, 3.3A, 400W(1ms)	DO-214AC	1d	1a	Sus
75A	-	SMAJP4KE75A	TVS	Vrwm=64.10V, Vbr=71.30..78.80V, Ipp=4.0A, 400W(1ms)	DO-214AC	1d	1a	Mco
75A	-	SMBG75A	TVS	Vrwm=75V, Vbr=83.3..95.8V, 4.9A, 600W(1ms)	DO-215AA	5d	1a	Msc
75A	-	SMBJ75A	TVS	Vrwm=75V, Vbr=83.3..95.8V, 4.9A, 600W(1ms)	DO-214AA	1d	1a	Sus
75A	-	SMBJP6KE75A	TVS	Vrwm=64.10V, Vbr=71.30..78.80V, Ipp=5.9A, 600W(1ms)	DO-214AA	1d	1a	Mco
75A	-	SMCJ1.5KE75A	TVS	Vrwm=64.10V, Vbr=71.30..78.80V, Ipp=14.8A, 1500W(1ms)	DO-214AB	1d	1a	Mco
75A	-	SMCJ75A	TVS	Vrwm=75V, Vbr=83.3..95.8V, 12.4A, 1500W(1mS)	DO-214AB	1d	1k	Sus
75A	-	SMF75A	TVS	Vbr=83.3..92.1V, Vrwm=75V, Ipp=1.4A, 200W(1ms)	SOD-123FL	7d	1a	Mco
75A	-	SZP6SMB75A	TVS	Vrwm=75V, Vbr=71.3..78.8V, 5.8A, 600W(1ms)	403A	3d	1s	Ons
75A	-	TVP04A750A-G	TVS	Vbr=71.25..78.75V, Vrwm=64.1V, Ipp=3.88A, 400W(1ms)	DO-214AC	1d	2o	Cmc
75A	-	TVP06B75A-G	TVS	Vrwm=64.1V, Vbr=71.25..78.75V, Ipp=5.83A, 600W(1ms)	DO-214AA	1d	2o	Cmc
75A	-	UMA75A	TVS	Vrwm=75V, Vbr=83.3..121V, 4.1A, 500W(1ms)	UltraMite	14d	1v	Msc
75B	-	1SMB3EZ75	Zener diode	75V±5%, Zzt=90Ω, Izt=10.0mA, 3W	DO-214AA	1d	1a	Pjt
75B	-	SMC5375B	Zener diode	82.0V±5%, Zzt=65.0(15.0mA), Izm=58.0mA, 5W	DO-214AB	1d	1a	Ers
75C	-	1.5SMC75CA	TVS	Vrwm=64.1V, Vbr=71.3..78.8V, Ipp=14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
75C	-	1.5SMC75CA	TVS	Vrwm=64.1V, Vbr=71.3..78.8V, Ipp=14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
75C	-	1.5SMC75CA	TVS	Vrwm=64.1V, Vbr=71.3..78.8V, Ipp=14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
75C	-	P4SMA75C	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
75C	-	P4SMA75CA	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
75C	-	P6SMB75CA	TVS	Vrwm=75V, Vbr=71.3..78.8V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
75C	-	P6SMBJ75C	TVS	Vrwm=75V, Vbr=67.5..82.5V, 5.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
75C	-	SMAJP4KE75CA	TVS	Vrwm=64.10V, Vbr=71.30..78.80V, Ipp=4.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
75C	-	SMBG75C	TVS	Vrwm=75V, Vbr=83.3..105.7V, 4.5A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
75C	-	SMBJP6KE75CA	TVS	Vrwm=64.10V, Vbr=71.30..78.80V, Ipp=5.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
75C	-	SMCJ1.5KE75CA	TVS	Vrwm=64.10V, Vbr=71.30..78.80V, Ipp=14.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
75C	-	TVP04A750CA-G	TVS	Vbr=71.25..78.75V, Vrwm=64.1V, Ipp=3.88A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
75C	-	TVP06B75ACA-G	TVS	Vrwm=64.1V, Vbr=71.25..78.75V, Ipp=5.83A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
75CA	-	1SMC75CA	TVS	Vbr=83.3..92.1V, Vrwm=75V, 12.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
75CA	-	MMF75CA	TVS	Vrwm=75V, Vbr=83.3..95.8V, Ipp=1.4A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
75CA	-	P4SMA75CA	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
75CA	-	P6SMB75CA	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
75CA	-	P6SMBJ75CA	TVS	Vrwm=75V, Vbr=67.5..82.5V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
75CA	-	SMAJ75CA	TVS	Vrwm=75V, Vbr=83.3..92.1V, 3.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
75CA	-	SMBG75CA	TVS	Vrwm=75V, Vbr=83.3..95.8V, 4.9A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
75CA	-	SMBJ75CA	TVS	Vrwm=75V, Vbr=83.3..95.8V, 4.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
75CA	-	SMCJ75CA	TVS	Vrwm=75V, Vbr=83.3..95.8V, 11.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
75CA	-	SMF75CA	TVS	Vbr=83.3..92.1V, Vrwm=75V, Ipp=1.4A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
75CA	-	UMA75CA	TVS	Vrwm=75V, Vbr=83.3..121V, 4.1A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
75P	-	BZD27C75P	Zener diode	71.25..78.75V, Zzt=100Ω, Izt=10mA, 800mW	SOD-123FL	7d	1a	Pjt
75P	-	MFPZ75	Zener diode	71.25..78.75V, Izt=10mA, Zzt=100Ω, 800mW	SOD-123FL	7d	1a	Ttr
75V	-	SMA75	TVS	Vbr=83.3..102V, Vrwm=75.0V, 2.2A, 300W(1ms)	DO-214AC	1d	1a	Mic
75V	-	SMB75	TVS	Vbr=83.3..102V, Vrwm=75V, 4.5A, 600W(1ms)	DO-214AA	1d	1a	Mic
75V	-	SMC75	TVS	Vbr=83.3..102V, Vrwm=75V, 11.2A, 1500W(1ms)	DO-214AB	1d	1a	Mic
75VA	-	SMA75A	TVS	Vbr=83.3..92.1V, Vrwm=75.0V, 2.5A, 300W(1ms)	DO-214AC	1d	1a	Mic
75VA	-	SMB75A	TVS	Vbr=83.3..92.1V, Vrwm=75V, 5A, 600W(1ms)	DO-214AA	1d	1a	Mic
75VA	-	SMC75A	TVS	Vbr=83.3..92.1V, Vrwm=75V, 12.4A, 1500W(1ms)	DO-214AB	1d	1a	Mic
75VB	-	BZT52B75	Zener diode	73.50..76.50V, Izt=2mA, Zzt=255Ω, 500mW	SOD-123FL	7d	1a	Tsc
75VB	-	MMSZ75VBW	Zener diode	73.50..76.50V, Izt=2mA, Zzt=255Ω, 500mW	SOD-123FL	7d	1a	Tac
75VC	-	SMA75C	TVS	Vbr=83.3..102V, Vrwm=75.0V, 2.2A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
75VC	-	SMB75C	TVS	Vbr=83.3..102V, Vrwm=75V, 4.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
75VC	-	SMC75C	TVS	Vbr=83.3..102V, Vrwm=75V, 11.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
75VCA	-	SMA75CA	TVS	Vbr=83.3..92.1V, Vrwm=75.0V, 2.5A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
75VCA	-	SMB75CA	TVS	Vbr=83.3..92.1V, Vrwm=75V, 5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
75VCA	-	SMC75CA	TVS	Vbr=83.3..92.1V, Vrwm=75V, 12.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
75VZ	-	BZT52C75	Zener diode	71.25..78.75V, Izt=2mA, Zzt=255Ω, 500mW	SOD-123FL	7d	1a	Tsc
75VZ	-	MMSZ75VCW	Zener diode	71.25..78.75V, Izt=2mA, Zzt=255Ω, 500mW	SOD-123FL	7d	1a	Tac
75VZ	-	TCMMSZ75V	Zener diode	75V±5%, Izt=5mA, Zzt=240Ω, 500mW	SOD-123FL	7d	1a	Tac
75VZ	-	ZGFM0575C-MH	Zener diode	71.25..78.75V, Izt=5mA, Zzt=240Ω, 500mW	SOD-123	5d	1a	Pic
76	-	BAS70J	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOD-323	5d	1a	Ste
76	-	BAS70K	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOD-523	6d	1a	Ste
760A	-	1SMA4760A	Zener diode	68V±10%, Izt=3.7mA, Zzt=150Ω, 1W	DO-214AC	1d	1a	Eic
760A	-	SMAJ4760A	Zener diode	68V±5%, Izt=3.7mA, Zzt=150Ω, 1W	DO-214AC	1d	1w	Mco
760B	-	1SMA4760	Zener diode	68V±5%, Izt=3.7mA, Zzt=150Ω, 1W	DO-214AC	1d	1a	Trs
760B	-	Z1SMA4760A	Zener diode	64.60..71.40V, Izt=3.7mA, 1W	SMA	1d	1ab	Ttr
761A	-	1SMA4761A	Zener diode	75V±10%, Izt=3.3mA, Zzt=175Ω, 1W	DO-214AC	1d	1a	Eic
761A	-	SMAJ4761A	Zener diode	75V±5%, Izt=3.3mA, Zzt=175Ω, 1W	DO-214AC	1d	1w	Mco
761B	-	1SMA4761	Zener diode	75V±5%, Izt=3.3mA, Zzt=175Ω, 1W	DO-214AC	1d	1a	Trs
761B	-	Z1SMA4761A	Zener diode	71.25..78.75V, Izt=3.3mA, 1W	SMA	1d	1ab	Ttr
762A	-	1SMA4762A	Zener diode	82V±10%, Izt=3.0mA, Zzt=200Ω, 1W	DO-214AC	1d	1a	Eic
762B	-	1SMA4762	Zener diode	82V±5%, Izt=3.0mA, Zzt=200Ω, 1W	DO-214AC	1d	1a	Trs
762B	-	Z1SMA4762A	Zener diode	77.90..86.10V, Izt=3mA, 1W	SMA	1d	1ab	Ttr
763A	-	1SMA4763A	Zener diode	91V±10%, Izt=2.8mA, Zzt=250Ω, 1W	DO-214AC	1d	1a	Eic
763B	-	1SMA4763	Zener diode	91V±5%, Izt=2.8mA, Zzt=250Ω, 1W	DO-214AC	1d	1a	Trs
763B	-	Z1SMA4763A	Zener diode	86.45..95.55V, Izt=2.8mA, 1W	SMA	1d	1ab	Ttr
764A	-	1SMA4764A	Zener diode	100V±10%, Izt=2.5mA, Zzt=350Ω, 1W	DO-214AC	1d	1a	Eic
764B	-	1SMA4764	Zener diode	100V±5%, Izt=2.5mA, Zzt=350Ω, 1W	DO-214AC	1d	1a	Trs
764B	-	Z1SMA4764A	Zener diode	95.0..105.0V, Izt=2.5mA, 1W	SMA	1d	1ab	Ttr
76B	-	SMC5376B	Zener diode	87.0V±5%, Zzt=75.0(15.0mA), Izm=54.5mA, 5W	DO-214AB	1d	1a	Ers
77	-	BBY55-02W	C-diode	VCO-tuning, 16V, 20mA, 14..16pF(10..2V)	SCD-80	6d	1u	Inf
77B	-	SMC5377B	Zener diode	91.0V±5%, Zzt=75.0(15.0mA), Izm=52.5mA, 5W	DO-214AB	1d	1a	Ers
77ZA	-	BYD77A	Si-diode	U-Fast, Controlled avalanche, 50V, 1A, Vf<0.95V(1A), 30ns	1206	14d	1v	Zow
77ZB	-	BYD77B	Si-diode	U-Fast, Controlled avalanche, 100V, 1A, Vf<0.95V(1A), 30ns	1206	14d	1v	Zow
77ZD	-	BYD77D	Si-diode	U-Fast, Controlled avalanche, 200V, 1A, Vf<1V(1A), 25ns	1206	14d	1v	Zow
77ZG	-	BYD77G	Si-diode	U-Fast, Controlled avalanche, 400V, 1A, Vf<1V(1A), 50ns	1206	14d	1v	Zow
78	-	SMBG78	TVS	Vrwm=58V, Vbr=86.7..109.8V, 4.3A, 600W(1ms)	DO-215AA	5d	1a	Msc
78	-	USFZ8.2V	Zener diode	8.2V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
78A	-	1SMC78A	TVS	Vbr=86.7..95.8V, Vrwm=78V, 11.9A, 1500W(1ms)	DO-214AB	1d	1a	Eic
78A	-	MMF78A	TVS	Vrwm=78V, Vbr=86.7..99.7V, Ipp=1.4A, 200W(1ms)	SOD-123FL	7d	2m	Sst
78A	-	SMAJ78A	TVS	Vrwm=78V, Vbr=86.7..95.8V, 3.2A, 400W(1ms)	DO-214AC	1d	1a	Sus
78A	-	SMBG78A	TVS	Vrwm=58V, Vbr=86.7..99.7V, 4.7A, 600W(1ms)	DO-215AA	5d	1a	Msc
78A	-	SMBJ78A	TVS	Vrwm=58V, Vbr=86.7..99.7V, 4.7A, 600W(1ms)	DO-214AA	1d	1a	Sus
78A	-	SMCJ78A	TVS	Vrwm=78V, Vbr=86.7..99.7V, 10.8A, 1500W(1ms)	DO-214AB	1d	1k	Sus
78A	-	SMF78A	TVS	Vbr=86.7..95.8V, Vrwm=78V, Ipp=1.4A, 200W(1ms)	SOD-123FL	7d	1a	Mco
78A	-	UMA78A	TVS	Vrwm=78V, Vbr=86.7..126V, 4.0A, 500W(1ms)	UltraMite	14d	1v	Msc
78B	-	SMC5378B	Zener diode	100.0V±5%, Zzt=90.0(12.0mA), Izm=47.5mA, 5W	DO-214AB	1d	1a	Ers
78C	-	SMBG78C	TVS	Vrwm=58V, Vbr=86.7..109.8V, 4.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
78CA	-	1SMC78CA	TVS	Vbr=86.7..95.8V, Vrwm=78V, 11.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
78CA	-	MMF78CA	TVS	Vrwm=78V, Vbr=86.7..99.7V, Ipp=1.4A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
78CA	-	SMAJ78CA	TVS	Vrwm=78V, Vbr=86.7..95.8V, 3.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
78CA	-	SMBG78CA	TVS	Vrwm=78V, Vbr=86.7..99.7V, 4.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
78CA	-	SMBJ78CA	TVS	Vrwm=78V, Vbr=86.7..99.7V, 4.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
78CA	-	SMCJ78CA	TVS	Vrwm=78V, Vbr=86.7..99.7V, 10.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
78CA	-	SMF78CA	TVS	Vbr=86.7..95.8V, Vrwm=78V, Ipp=1.4A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
78CA	-	UMA78CA	TVS	Vrwm=78V, Vbr=86.7..126V, 4.0A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
78V	-	SMA78	TVS	Vbr=86.7..106V, Vrwm=78.0V, 2.2A, 300W(1ms)	DO-214AC	1d	1a	Mic
78V	-	SMB78	TVS	Vbr=86.7..106V, Vrwm=78V, 4.3A, 600W(1ms)	DO-214AA	1d	1a	Mic
78V	-	SMC78	TVS	Vbr=86.7..106V, Vrwm=78V, 10.8A, 1500W(1ms)	DO-214AB	1d	1a	Mic
78VA	-	SMA78A	TVS	Vbr=86.7..95.8V, Vrwm=78.0V, 2.4A, 300W(1ms)	DO-214AC	1d	1a	Mic
78VA	-	SMB78A	TVS	Vbr=86.7..95.8V, Vrwm=78V, 4.8A, 600W(1ms)	DO-214AA	1d	1a	Mic
78VA	-	SMC78A	TVS	Vbr=86.7..95.8V, Vrwm=78V, 11.9A, 1500W(1ms)	DO-214AB	1d	1a	Mic
78VC	-	SMA78C	TVS	Vbr=86.7..106V, Vrwm=78.0V, 2.2A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
78VC	-	SMB78C	TVS	Vbr=86.7..106V, Vrwm=78V, 4.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
78VC	-	SMC78C	TVS	Vbr=86.7..106V, Vrwm=78V, 10.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
78VCA	-	SMA78CA	TVS	Vbr=86.7..95.8V, Vrwm=78.0V, 2.4A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
78VCA	-	SMB78CA	TVS	Vbr=86.7..95.8V, Vrwm=78V, 4.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
78VCA	-	SMC78CA	TVS	Vbr=86.7..95.8V, Vrwm=78V, 11.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
7A	-	MA2Z374	C-diode	CATV-tuning, 32V, 87/2pF(0/25V), 0.9Ω(470MHz)	SOD-123	5d	1a	Pan
7A	-	MA374	C-diode	CATV-tuning, 32V, 87/2pF(0/25V), 0.9Ω(470MHz)	SOD-123	5d	1a	Pan
7A1	-	MM1ZB27H	Zener diode	26.46..27.54V, Izt=5mA, Zzt=70Ω, 500mW	SOD-123	5d	1a	Zow
7A5	-	RKZ7.5AKU	Zener diode	6.85..7.22V, Izt=20mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
7B1	-	MM1ZB30H	Zener diode	29.4..30.6V, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1a	Zow
7B5	-	RKZ7.5BKU	Zener diode	7.07..7.45V, Izt=20mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
7C	-	MA2Z376	C-diode	UHF-band VCO, 6V, 14/6.8pF(1/3V), 0.3Ω(470MHz)	SOD-123	5d	1a	Pan
7C	-	MA376	C-diode	UHF-band VCO, 6V, 14/6.8pF(1/3V), 0.3Ω(470MHz)	SOD-123	5d	1a	Pan
7C	-	MM3Z2V4B	Zener diode	2.30..2.65V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323FL	7d	1a	Lge
7C1	-	MM1ZB33H	Zener diode	32.34..33.66V, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1a	Zow
7C5	-	RKZ7.5CKU	Zener diode	7.29..7.67V, Izt=20mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
7D	-	MA2Z377	C-diode	UHF-band VCO, 12V, 20mA, 2.8/1.1pF(2/10V), 0.6Ω(470MHz)	SOD-123	5d	1a	Pan
7D	-	MA377	C-diode	UHF-band VCO, 12V, 20mA, 2.8/1.1pF(2/10V), 0.6Ω(470MHz)	SOD-123	5d	1a	Pan
7D	-	MM3Z2V7B	Zener diode	2.65..2.95V, Izt=5mA, Zzt=110Ω, 300mW	SOD-323FL	7d	1a	Lge
7D	-	STZ8027B	Zener diode	2.65..2.9V, Izt=5mA, Zzt=110Ω, 300mW	SOD-323	5d	1a	Jiy
7D1	-	MM1ZB36H	Zener diode	35.28..36.72V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1a	Zow
7E	-	CDZ55C7V5T	Zener diode	7.13..7.88V, Zzt=7Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
7E	-	MM3Z3V0B	Zener diode	2.95..3.25V, Izt=5mA, Zzt=120Ω, 300mW	SOD-323FL	7d	1a	Lge
7E	-	STZ8030B	Zener diode	2.95..3.2V, Izt=5mA, Zzt=120Ω, 300mW	SOD-323	5d	1a	Jiy
7E1	-	MM1ZB39H	Zener diode	38.22..39.78V, Izt=2.5mA, Zzt=100Ω, 500mW	SOD-123	5d	1a	Zow
7F	-	MAZD390	Zener diode	37..41V, Zzt=300Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
7F	-	MM3Z3V3B	Zener diode	3.25..3.55V, Izt=5mA, Zzt=120Ω, 300mW	SOD-323FL	7d	1a	Lge
7F	-	STZ8033B	Zener diode	3.25..3.5V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Jiy
7F1	-	MM1ZB43H	Zener diode	42.14..43.86V, Izt=2.5mA, Zzt=130Ω, 500mW	SOD-123	5d	1a	Zow
7G1	-	MM1ZB47H	Zener diode	46.06..47.94V, Izt=2.5mA, Zzt=150Ω, 500mW	SOD-123	5d	1a	Zow
7H	-	MM3Z3V6B	Zener diode	3.60..3.84V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323FL	7d	1a	Lge
7H	-	STZ8036B	Zener diode	3.55..3.8V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Jiy
7H1	-	MM1ZB51H	Zener diode	49.98..52.02V, Izt=2.5mA, Zzt=180Ω, 500mW	SOD-123	5d	1a	Zow
7J	-	MM3Z3V9B	Zener diode	3.89..4.16V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323FL	7d	1a	Lge
7J	-	STZ8039B	Zener diode	3.87..4.1V, Izt=5mA, Zzt=13Ω, 300mW	SOD-323	5d	1a	Jiy
7J1	-	MM1ZB56H	Zener diode	54.88..57.12V, Izt=2.5mA, Zzt=180Ω, 500mW	SOD-123	5d	1a	Zow
7K	-	MA2Z357	C-diode	CATV-tuning, 34V, 58/2.53pF(0/25V), 0.54Ω(470MHz)	SOD-123	5d	1a	Pan
7K	-	MA2Z357J	C-diode	CATV-tuning, 34V, 58/2.53pF(0/25V), 0.54Ω(470MHz)	SOD-523	6d	1a	Pan
7K	-	MA357	C-diode	CATV-tuning, 34V, 58/2.53pF(0/25V), 0.54Ω(470MHz)	SOD-123	5d	1a	Pan
7K	-	MA357J	C-diode	CATV-tuning, 34V, 58/2.53pF(0/25V), 0.54Ω(470MHz)	SOD-523	6d	1a	Pan
7K	-	MM3Z4V3B	Zener diode	4.17..4.43V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323FL	7d	1a	Lge
7K	-	STZ8043B	Zener diode	4.17..4.4V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Jiy
7K1	-	MM1ZB62H	Zener diode	60.76..63.24V, Izt=2.5mA, Zzt=200Ω, 500mW	SOD-123	5d	1a	Zow
7L	-	MA379	C-diode	UHF-tuner, 32V, 6.3/0.95pF(2/25V)	SOD-323	5d	1a	Pan
7L1	-	MM1ZB68H	Zener diode	66.64..69.36V, Izt=2.5mA, Zzt=250Ω, 500mW	SOD-123	5d	1a	Zow
7M	-	MM3Z4V7B	Zener diode	4.55..4.75V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323FL	7d	1a	Lge
7M1	-	MM1ZB75H	Zener diode	73.5..76.5V, Izt=2.5mA, Zzt=300Ω, 500mW	SOD-123	5d	1a	Zow
7N	-	CMDZ1L8	Zener diode	1.71..1.89V, Izt=0.5mA, Zzt=1200Ω, 250mW	SOD-323	5d	1a	Cen
7N	-	MA2Z392	C-diode	GaAs, VCO, 10V, 40mA, 5/1.8pF(1/4V), 0.3Ω(470MHz)	SOD-123	5d	1a	Pan
7N	-	MA392	C-diode	GaAs, VCO, 10V, 40mA, 5/1.8pF(1/4V), 0.3Ω(470MHz)	SOD-123	5d	1a	Pan
7N	-	MM3Z5V1B	Zener diode	4.98..5.20V, Izt=5mA, Zzt=80Ω, 300mW	SOD-323FL	7d	1a	Lge
7P	-	BZT52B5V6WS	Zener diode	5.488..5.712V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
7P	-	CMDZ33L	Zener diode	31.35..34.65V, Izt=0.5mA, Zzt=250Ω, 250mW	SOD-323	5d	1a	Cen
7P	-	MA2Z393	C-diode	GaAs, VCO, 10V, 50mA, 10.5/3.6pF(1/4V), 0.3Ω(470MHz)	SOD-123	5d	1a	Pan
7P	-	MA393	C-diode	GaAs, VCO, 10V, 50mA, 10.5/3.6pF(1/4V), 0.3Ω(470MHz)	SOD-123	5d	1a	Pan
7P	-	MM3Z5B6H	Zener diode	5.488..5.712V, Izt=5mA, Zzt=80Ω, 300mW	SOD-323	5d	1a	Zow
7P	-	MM3Z5V6B	Zener diode	5.49..5.73V, Izt=5mA, Zzt=60Ω, 300mW	SOD-323FL	7d	1a	Lge
7P5	-	SML4737	Zener diode	7.5V±5%, Izt=34mA, Zzt=4Ω, 1W	DO-214AC	1d	1k	Vs
7R	-	MM3Z6V2B	Zener diode	6.06..6.33V, Izt=5mA, Zzt=60Ω, 300mW	SOD-323FL	7d	1a	Lge
7R	-	STZ8062B	Zener diode	6.05..6.36V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Jiy
7S	-	MA2Z391	C-diode	Ga-As VCO, 10V, 30mA, 3.7/1.4pF(1/4V), 0.3Ω(470MHz)	SOD-123	5d	1a	Pan
7S	-	MA391	C-diode	Ga-As VCO, 10V, 30mA, 3.7/1.4pF(1/4V), 0.3Ω(470MHz)	SOD-123	5d	1a	Pan
7U	-	MA10301	C-diode	VCO, 15V, 21.5/15.9pF(1/2V), 0.35Ω(100MHz)	SOD-123	5d	1b	Pan
7V0	-	SMA7.0	TVS	Vbr=7.78..9.51V, Vrwm=7.0V, 22.6A, 300W(1ms)	DO-214AC	1d	1a	Mic
7V0	-	SMB7.0	TVS	Vbr=7.78..9.51V, Vrwm=7V, 45.1A, 600W(1ms)	DO-214AA	1d	1a	Mic
7V0	-	SMC7.0	TVS	Vbr=7.78..9.51V, Vrwm=7V, 112.8A, 1500W(1ms),	DO-214AB	1d	1a	Mic
7V0A	-	SMA7.0A	TVS	Vbr=7.78..8.6V, Vrwm=7.0V, 25A, 300W(1ms)	DO-214AC	1d	1a	Mic
7V0A	-	SMB7.0A	TVS	Vbr=7.78..8.6V, Vrwm=7V, 50A, 600W(1ms)	DO-214AA	1d	1a	Mic
7V0A	-	SMC7.0A	TVS	Vbr=7.78..8.6V, Vrwm=7V, 125A, 1500W(1ms),	DO-214AB	1d	1a	Mic
7V0C	-	SMA7.0C	TVS	Vbr=7.78..9.51V, Vrwm=7.0V, 22.6A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
7V0C	-	SMA7.5C	TVS	Vbr=8.33..10.3V, Vrwm=7.5V, 21A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
7V0C	-	SMB7.0C	TVS	Vbr=7.78..9.51V, Vrwm=7V, 45.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
7V0C	-	SMC7.0C	TVS	Vbr=7.78..9.51V, Vrwm=7V, 112.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
7V0CA	-	SMA7.0CA	TVS	Vbr=7.78..8.6V, Vrwm=7.0V, 25A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
7V0CA	-	SMA7.5CA	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 23.3A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
7V0CA	-	SMB7.0CA	TVS	Vbr=7.78..8.6V, Vrwm=7V, 50A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
7V0CA	-	SMC7.0CA	TVS	Vbr=7.78..8.6V, Vrwm=7V, 125A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
7V5	-	BZD27C7V5P	Zener diode	7.13..7.88V, Zzt=2Ω, Izt=100mA, 800mW	SOD-123FL	7d	1a	Pjt
7V5	-	BZY55-C7V5	Zener diode	7.13..7.88V, Izt=5mA, Zzt=7Ω, 500mW	0805	70d	2d	Tsc
7V5	-	CDZ55C7V5	Zener diode	7.13..7.88V, Zzt=7Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
7V5	-	CDZ55C7V5S	Zener diode	7.13..7.88V, Zzt=7Ω, Izt=5mA, 500mW	0805	70d	2d	Crp

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
7V5	-	CTZ55C7V5	Zener diode	7.13..7.88V, Izt=5mA, Zzt=7Ω, 500mW	1206	70d	2d	Ctc
7V5	-	CZRNC55C7V5-G	Zener diode	7.13..7.88V, Zt=7Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
7V5	-	CZRSC55C7V5-G	Zener diode	7.13..7.88V, Zt=7Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
7V5	-	DFLZ7V5	Zener diode	7.5V±5%, Izt=100mA, Zzt<2Ω, 1W	SOD-123FL	7d	1d	Mco
7V5	-	MFPZ7V5	Zener diode	7.13..7.88V, Izt=100mA, Zzt=2Ω, 800mW	SOD-123FL	7d	1a	Ttr
7V5	-	P6SMBJ7V5	TVS	Vrwm=7.5V, Vbr=6.75..8.25V, 51A, 600W(1ms)	DO-214AA	1d	1n	Lif
7V5	-	SMA7.5	TVS	Vbr=8.33..10.3V, Vrwm=7.5V, 21A, 300W(1ms)	DO-214AC	1d	1a	Mic
7V5	-	SMB7.5	TVS	Vbr=8.33..10.2V, Vrwm=7.5V, 42A, 600W(1ms)	DO-214AA	1d	1a	Mic
7V5	-	SMC7.5	TVS	Vbr=8.33..10.2V, Vrwm=7.5V, 104.9A, 1500W(1ms),	DO-214AB	1d	1a	Mic
7V5A	-	1.5SMC7.5A	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=132A, 1500W(1ms)	DO-214AB	1d	1b	Mde
7V5A	-	1.5SMC7.5A	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=132A, 1500W(1ms)	DO-214AB	1d	1k	Vs
7V5A	-	1.5SMC7.5A	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=132A, 1500W(1ms)	DO-214AB	1d	2s	Lif
7V5A	-	1.5SMC7.5A	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=132A, 1500W(1ms)	403	3d	2t	Ons
7V5A	-	P4SMA7.5A	TVS	Vbr=7.13..7.88V, Vrwm=7.5V, 35.4A, 400W (1ms)	DO-214AC	1d	1k	Vs
7V5A	-	P6SMB7.5A	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 53.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
7V5A	-	P6SMB7.5A	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 53.1A, 600W(1ms)	403A	3d	1s	Ons
7V5A	-	P6SMBJ7V5A	TVS	Vrwm=7.5V, Vbr=6.75..8.25V, 53A, 600W(1ms)	DO-214AA	1d	1n	Lif
7V5A	-	SMA7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 23.3A, 300W(1ms)	DO-214AC	1d	1a	Mic
7V5A	-	SMAJP4KE7.5A	TVS	Vrwm=6.40V, Vbr=7.13..7.88V, Ipp=36.3A, 400W(1ms)	DO-214AC	1d	1a	Mco
7V5A	-	SMB7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 46.5A, 600W(1ms)	DO-214AA	1d	1a	Mic
7V5A	-	SMBJP6KE7.5A	TVS	Vrwm=6.40V, Vbr=7.13..7.88V, Ipp=54.0A, 600W(1ms)	DO-214AA	1d	1a	Mco
7V5A	-	SMC7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 116.3A, 1500W(1ms),	DO-214AB	1d	1a	Mic
7V5A	-	SMCJ1.5KE7.5A	TVS	Vrwm=6.40V, Vbr=7.13..7.88V, Ipp=134.5A, 1500W(1ms)	DO-214AB	1d	1a	Mco
7V5A	-	SZP6SMB7.5A	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 53.1A, 600W(1ms)	403A	3d	1s	Ons
7V5A	-	TVP04A7V5A-G	TVS	Vbr=7.13..7.88V, Vrwm=6.4V, Ipp=35.40A, 400W(1ms)	DO-214AC	1d	2o	Cmc
7V5A	-	TVP06B7V5A-G	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=53.10A, 600W(1ms)	DO-214AA	1d	2o	Cmc
7V5B	-	BZT52B7V5	Zener diode	7.35..7.65V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tsc
7V5B	-	MMSZ7V5BW	Zener diode	7.35..7.65V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tac
7V5B	-	Z3SMB7.5B	Zener diode	7.13..7.88V, Izt=100mA, Zzt=2Ω, 3W	DO-214AA	1d	1a	Ttr
7V5C	-	1.5SMC7.5CA	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=132A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
7V5C	-	1.5SMC7.5CA	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=132A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
7V5C	-	1.5SMC7.5CA	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=132A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
7V5C	-	P4SMA7.5CA	TVS	Vbr=7.13..7.88V, Vrwm=7.5V, 35.4A, 400W (1ms), Bidir.	DO-214AC	1ba	1l	Vs
7V5C	-	P6SMB7.5CA	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 53.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
7V5C	-	P6SMBJ7V5C	TVS	Vrwm=7.5V, Vbr=6.75..8.25V, 51A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
7V5C	-	SMAJP4KE7.5CA	TVS	Vrwm=6.40V, Vbr=7.13..7.88V, Ipp=36.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
7V5C	-	SMB7.5C	TVS	Vbr=8.33..10.2V, Vrwm=7.5V, 42A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
7V5C	-	SMBJP6KE7.5CA	TVS	Vrwm=6.40V, Vbr=7.13..7.88V, Ipp=54.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
7V5C	-	SMC7.5C	TVS	Vbr=8.33..10.2V, Vrwm=7.5V, 104.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
7V5C	-	SMCJ1.5KE7.5CA	TVS	Vrwm=6.40V, Vbr=7.13..7.88V, Ipp=134.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
7V5C	-	TVP04A7V5CA-G	TVS	Vbr=7.13..7.88V, Vrwm=6.4V, Ipp=35.40A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
7V5C	-	TVP06B7V5ACA-G	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=53.10A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
7V5CA	-	P6SMBJ7V5CA	TVS	Vrwm=7.5V, Vbr=6.75..8.25V, 53A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
7V5CA	-	SMB7.5CA	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 46.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
7V5CA	-	SMC7.5CA	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 116.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
7V5Z	-	BZT52C7V5	Zener diode	7.11..7.86V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tsc
7V5Z	-	MMSZ7V5CW	Zener diode	7.11..7.86V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tac
7V5Z	-	TCMMSZ7V5	Zener diode	7.5V±5%, Izt=5mA, Zzt=14Ω, 500mW	SOD-123FL	7d	1a	Tac
7V5Z	-	ZGFM057V5C-MH	Zener diode	7.11..7.86V, Izt=5mA, Zzt=14Ω, 500mW	SOD-123	5d	1a	Pic
7X	-	MA2ZV01	C-diode	VCO, 6V, 16/6pF(1/3V), 1Ω(470MHz)	SOD-123	5d	1a	Pan
7X	-	MM3Z6V8B	Zener diode	6.65..6.93V, Izt=5mA, Zzt=40Ω, 300mW	SOD-323FL	7d	1a	Lge
7X	-	STZ8068B	Zener diode	6.64..6.98V, Izt=5mA, Zzt=20Ω, 300mW	SOD-323	5d	1a	Jiy
7Y	-	KDZ22VVY	Zener diode	21.54..22.47V, Izt=5mA, Zzt=30Ω, 100mW	VSC	7d	1a	Kec
7Y	-	MA2ZV02	C-diode	VCO, 6V, 19/8.1pF(1/4V), 0.3Ω(470MHz)	SOD-123	5d	1a	Pan
7Y	-	MM3Z7V5B	Zener diode	7.28..7.60V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323FL	7d	1a	Lge
7Y	-	STZ8075B	Zener diode	7.29..7.67V, Izt=5mA, Zzt=20Ω, 300mW	SOD-323	5d	1a	Jiy
7Z	-	BZT52B4V7S	Zener diode	4.61..4.79V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Tsc
7Z	-	MA2ZV03	C-diode	VCO, 6V, 5.5/2.35pF(1/4V), 0.3Ω(470MHz)	SOD-123	5d	1a	Pan
7Z	-	MM3Z4V7B	Zener diode	4.61..4.79V, Zzt=75Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
7Z	-	MM3Z4V7BW	Zener diode	4.61..4.79V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Tac
7Z	-	MM3Z8V2B	Zener diode	8.02..8.36V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323FL	7d	1a	Lge
7Z	-	TCMM3Z4V7B	Zener diode	4.7V±2%, Izt=5mA, Zzt=75Ω, 200mW	SOD-323FL	7d	1a	Tac
8	-	1SS420PT	Si-diode	Sw, 85V, 150mA, Vf<1.2V(150mA), 4ns	SOD-523	6d	1a	Chm
8	-	BB178	C-diode	TV-VHF-tuning, 32V, 20mA, 62..2.9pF(1..28V), 160MHz	SOD-523	6d	1a	Phi
8	-	BBY58-02V	C-diode	VCO-tuning, 10V, 20mA, 17.5..19.3pF(4..1V)	SC-79	6d	1u	Inf
8	-	GBLC08	TVS	Vrwm=8V, 17A, 350W(1ms), 3pF	SOD-323	5d	1a	Prt
8	-	HVU308	C-diode	UHF-tuning, 30V, 13.9..16.1pF(2V)	SOD-323	5d	1a	Ren
8	-	KDZ5.6FV	Zener diode	5.30..6.0V, Izt=5mA, Zzt=40Ω, 100mW	TFSC	7d	1a	Kec
8	-	MAZS082	Zener diode	7.7..8.7V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
8	-	MMPZ5229SPT	Zener diode	4.214..4.386V, Izt=5mA, Zzt=88Ω, 225mW	SOD-323	5d	1a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
8	-	MMSZ5257BPT	Zener diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 225mW	SOD-523	6d	1a	Chm
8	bb	BBY58-03W	C-diode	VCO-tuning, 10V, 20mA, 17.5..19.3pF(4..1V)	SOD-323	5d	2	Inf
8-	-	MAZS0820M	Zener diode	8.03..8.43V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
8.	-	MMSZ5257SPT	Zener diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 225mW	SOD-523	6d	1a	Chm
8.0	-	SMBG8.0	TVS	Vrwm=8.0V, Vbr=8.89..11.3V, 40.0A, 600W(1ms)	DO-215AA	5d	1a	Msc
8.0A	-	1SMC8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 110.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
8.0A	-	MMF8.0A	TVS	Vrwm=8.0V, Vbr=8.89..10.23V, Ipp=14.7A, 200W(1ms)	SOD-123FL	7d	2m	Sst
8.0A	-	SMAJ8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 29.4A, 400W(1ms)	DO-214AC	1d	1j	Sus
8.0A	-	SMBG8.0A	TVS	Vrwm=8.0V, Vbr=8.89..10.23V, 44.1A, 600W(1ms)	DO-215AA	5d	1a	Msc
8.0A	-	SMBJ8.0A	TVS	Vrwm=8.0V, Vbr=8.89..10.23V, 44.1A, 600W(1ms)	DO-214AA	1d	1a	Sus
8.0A	-	SMCJ8.0A	TVS	Vrwm=8V, Vbr=8.89..9.83V, 100A, 1500W(1ms)	DO-214AB	1d	1k	Sus
8.0A	-	SMF8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, Ipp=14.7A, 200W(1ms)	SOD-123FL	7d	1a	Mco
8.0C	-	SMBG8.0C	TVS	Vrwm=8.0V, Vbr=8.89..11.3V, 40.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
8.0CA	-	1SMC8.0CA	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 110.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
8.0CA	-	MMF8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..10.23V, Ipp=14.7A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
8.0CA	-	SMAJ8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 29.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
8.0CA	-	SMBG8.0CA	TVS	Vrwm=8V, Vbr=8.89..10.23V, 44.1A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
8.0CA	-	SMBJ8.0CA	TVS	Vrwm=8V, Vbr=8.89..10.23V, 44.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
8.0CA	-	SMCJ8.0CA	TVS	Vrwm=8V, Vbr=8.89..9.83V, 100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
8.0CA	-	SMF8.0CA	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, Ipp=14.7A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
8.2	-	MAZ5082	Zener diode	7.7..8.7V, Zzt=6Ω(5mA), 500mW	MP2	11d	1a	Pan
8.2	-	MAZ80820H	Zener diode	8.29..8.7V, Zzt=20Ω(5mA), 150mW	SC-76	6d	1a	Pan
8.2	-	MAZY082	Zener diode	7.4..9.1V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
8.2	-	P4SMA8.2	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 33.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
8.2	-	U1ZB8.2	Zener diode	7.4..9.1V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos
8.2A	-	P4SMA8.2A	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 35.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
8.2A	-	P6SMB8.2A	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 50.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
8.2B	-	HZF8.2BP	Zener diode	8.2V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
8.2B	-	PTZ8.2B	Zener diode	8.2V±10%, Izt=40mA, 1W	DO-214AC	1d	1a	Rhm
8.2C	-	HZF8.2CP	Zener diode	8.2V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
8.2C	-	P4SMA8.2C	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 33.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
8.2CA	-	P4SMA8.2CA	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 35.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
8.2CA	-	P6SMB8.2CA	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 50.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
8.2G	-	ZD8.2G-CA2	Zener diode	8.2V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
8.2G	-	ZD8.2G-CB2	Zener diode	8.2V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
8.2L	-	ZD8.2L-CA2	Zener diode	8.2V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
8.2L	-	ZD8.2L-CB2	Zener diode	8.2V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
8.5	-	SMBG8.5	TVS	Vrwm=8.5V, Vbr=9.44..11.92V, 37.7A, 600W(1ms)	DO-215AA	5d	1a	Msc
8.5A	-	1SMC8.5A	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 104.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
8.5A	-	MMF8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, Ipp=13.9A, 200W(1ms)	SOD-123FL	7d	2m	Sst
8.5A	-	SMAJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 27.7A, 400W(1ms)	DO-214AC	1d	1j	Sus
8.5A	-	SMBG8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 41.7A, 600W(1ms)	DO-215AA	5d	1a	Msc
8.5A	-	SMBJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 41.7A, 600W(1ms)	DO-214AA	1d	1a	Sus
8.5A	-	SMCJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 94.3A, 1500W(1ms)	DO-214AB	1d	1k	Sus
8.5A	-	SMF8.5A	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, Ipp=13.9A, 200W(1ms)	SOD-123FL	7d	1a	Mco
8.5C	-	SMBG8.5C	TVS	Vrwm=8.5V, Vbr=9.44..11.92V, 37.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
8.5CA	-	1SMC8.5CA	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 104.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
8.5CA	-	MMF8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, Ipp=13.9A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
8.5CA	-	SMAJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 27.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
8.5CA	-	SMBG8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 41.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
8.5CA	-	SMBJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 41.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
8.5CA	-	SMCJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 94.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
8.5CA	-	SMF8.5CA	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, Ipp=13.9A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
8/8	bs	SD24C	TVS	Vrwm=24.0V, Vbr=26.7..40V, Ipp=8A, 350W(1ms), Bidir.	SOD-323	5ba	1e	Smt
8^	-	MAZS0820H	Zener diode	8.29..8.7V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
8^2	-	MAZ80820H	Zener diode	8.29..8.7V, Zzt=20Ω(5mA), 150mW	SC-76	6d	1a	Pan
8^2	-	MAZ8082GHL	Zener diode	8.29..8.7V, Zzt=20Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
8_	-	MAZS0820L	Zener diode	7.77..8.17V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
8_2	-	MAZ80820L	Zener diode	8.03..8.43V, Zzt=20Ω(5mA), 150mW	SC-76	6d	1a	Pan
8_2	-	MAZ8082GLL	Zener diode	8.03..8.43V, Zzt=20Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
8•2	-	RKZ8.2B2KG	Zener diode	8.02..8.36V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	2e	Ren
8•2	-	RKZ8.2B2KJ	Zener diode	8.02..8.36V, Izt=5mA, Zzt=30Ω, 150mW	UFP	7d	2e	Ren
8•2	am	HZU8.2B3	Zener diode	8.28..8.64V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
8•2	an	HZU8.2B2	Zener diode	8.02..8.36V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
8•2	ao	HZU8.2B1	Zener diode	7.76..8.10V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
80APH	-	BYG80A	Si-diode	U-fast, Controlled avalanche, 50V, 1.25A, Vf<0.67V(1.25A), 25ns	DO-214AC	1d	1a	Phi
80BPH	-	BYG80B	Si-diode	U-fast, Controlled avalanche, 100V, 1.25A, Vf<0.67V(1.25A), 25ns	DO-214AC	1d	1a	Phi
80CPH	-	BYG80C	Si-diode	U-fast, Controlled avalanche, 150V, 1.25A, Vf<0.67V(1.25A), 25ns	DO-214AC	1d	1a	Phi
80DPH	-	BYG80D	Si-diode	U-fast, Controlled avalanche, 200V, 1.25A, Vf<0.67V(1.25A), 25ns	DO-214AC	1d	1a	Phi
80FPH	-	BYG80F	Si-diode	U-fast, Controlled avalanche, 300V, 1.15A, Vf<0.73V(1.15A), 50ns	DO-214AC	1d	1a	Phi

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
80GPH	-	BYG80G	Si-diode	U-fast, Controlled avalanche, 400V, 1.15A, Vf<0.73V(1.15A), 50ns	DO-214AC	1d	1a	Phi
80JPH	-	BYG80J	Si-diode	U-fast, Controlled avalanche, 500V, 1.15A, Vf<0.96V(1.15A), 50ns	DO-214AC	1d	1a	Phi
81	-	ZV831BV2TA	C-diode	VHF/UHF-tuning, 25V, 330mW, 15pF(2V), ΔC=±5%	SOD-523	6d	1a	Zx
813B	-	1SMA5913B	Zener diode	3.3V±5%, Zzt=10Ω, Izm<455mA, 1.5W	403D-02	3d	1f	Ons
813B	-	1SMA5913B	Zener diode	3.3V±5%, Zzt=10Ω, Izm<455mA, 1.5W	DO-214AC	1d	1a	Kex
814B	-	1SMA5914B	Zener diode	3.6V±5%, Zzt=9Ω, Izm<417mA, 1.5W	403D-02	3d	1f	Ons
814B	-	1SMA5914B	Zener diode	3.6V±5%, Zzt=9Ω, Izm<417mA, 1.5W	DO-214AC	1d	1a	Kex
815B	-	1SMA5915B	Zener diode	3.9V±5%, Zzt=7.5Ω, Izm<385mA, 1.5W	403D-02	3d	1f	Ons
815B	-	1SMA5915B	Zener diode	3.9V±5%, Zzt=7.5Ω, Izm<385mA, 1.5W	DO-214AC	1d	1a	Kex
816B	-	1SMA5916B	Zener diode	4.3V±5%, Zzt=6Ω, Izm<349mA, 1.5W	403D-02	3d	1f	Ons
816B	-	1SMA5916B	Zener diode	4.3V±5%, Zzt=6Ω, Izm<349mA, 1.5W	DO-214AC	1d	1a	Kex
817B	-	1SMA5917B	Zener diode	4.7V±5%, Zzt=5Ω, Izm<319mA, 1.5W	403D-02	3d	1f	Ons
817B	-	1SMA5917B	Zener diode	4.7V±5%, Zzt=5Ω, Izm<319mA, 1.5W	DO-214AC	1d	1a	Kex
818B	-	1SMA5918B	Zener diode	5.1V±5%, Zzt=4Ω, Izm<294mA, 1.5W	403D-02	3d	1f	Ons
818B	-	1SMA5918B	Zener diode	5.1V±5%, Zzt=4Ω, Izm<294mA, 1.5W	DO-214AC	1d	1a	Kex
819B	-	1SMA5919B	Zener diode	5.6V±5%, Zzt=2Ω, Izm<268mA, 1.5W	403D-02	3d	1f	Ons
819B	-	1SMA5919B	Zener diode	5.6V±5%, Zzt=2Ω, Izm<268mA, 1.5W	DO-214AC	1d	1a	Kex
82	-	EDZ4.3B	Zener diode	4.17..4.43V, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Rhm
82	-	EDZV4.3B	Zener diode	4.17..4.43V, Izt=5.0mA, Zzt=100Ω, 150mW	SOD-523	6d	2v	Rhm
82	-	FDZ4.3EV	Zener diode	4.170..4.430V, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Fis
82	-	FDZ4.3VT	Zener diode	4.170..4.430V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Fis
82	-	GDZ4V3B-V	Zener diode	4.17..4.43V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	2m	Vs
82	-	HZC8.2	Zener diode	8.2V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
82	-	HZU8.2G	Zener diode	7.76..8.64V, Izt=5mA, 200mW	SOD-323	5d	1a	Ren
82	-	KDZ8.2EV	Zener diode	7.7..8.7V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
82	-	KDZ8.2V	Zener diode	7.7..8.7V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
82	-	LBZT52B4V3T1G	Zener diode	4.17..4.43V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
82	-	LEDZ4.3BT1G	Zener diode	4.17..4.43V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
82	-	LUDZS4.3BT1G	Zener diode	4.17..4.43V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
82	-	MMPZ5268SPT	Zener diode	80.36..83.64V, Izt=1.5mA, Zzt=330Ω, 225mW	SOD-323	5d	1a	Chm
82	-	P4SMA82	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 3.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
82	-	P6SMBJ82	TVS	Vrwm=82V, Vbr=73.8..90.2V, 5.1A, 600W(1ms)	DO-214AA	1d	1n	Lif
82	-	SML4762	Zener diode	82V±5%, Izt=3mA, Zzt=200Ω, 1W	DO-214AC	1d	1k	Vs
82	-	TZD8.2WS	Zener diode	7.70..8.70V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Ttr
82	-	TZD8.2WT	Zener diode	7.70..8.70V, Izt=5mA, Zzt=20Ω, 150mW	SOD-523	6d	1a	Ttr
82	-	U1ZB82	Zener diode	73.8..90.2V, Izt=3mA, 1W	3-4D1A	1d	2fa	Tos
82	-	UDZS4.3B	Zener diode	4.17..4.43V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Wtr
82	-	UDZS4.3B	Zener diode	4.3V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
82	-	UDZV4.3B	Zener diode	4.17..4.43V, Izt=5.0mA, Zzt=100Ω, 200mW	SOD-323	5d	2v	Rhm
82	-	VDZS4.3B	Zener diode	4.3V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
82	-	ZV832BV2TA	C-diode	VHF/UHF-tuning, 25V, 330mW, 22pF(2V), ΔC=±5%	SOD-523	6d	1a	Zx
82	ax	CRY82	Zener diode	7.4..9V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
8-2	-	MAZ80820M	Zener diode	7.7..8.7V, Zzt=20Ω(5mA), 150mW	SC-76	6d	1a	Pan
8-2	-	MAZ8082GML	Zener diode	7.7..8.7V, Zzt=20Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
82•	-	TZD8.2YWS	Zener diode	8.02..8.36V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Ttr
82•	-	TZD8.2YWT	Zener diode	8.02..8.36V, Izt=5mA, Zzt=20Ω, 150mW	SOD-523	6d	1a	Ttr
820B	-	1SMA5920B	Zener diode	6.2V±5%, Zzt=2Ω, Izm<242mA, 1.5W	403D-02	3d	1f	Ons
820B	-	1SMA5920B	Zener diode	6.2V±5%, Zzt=2Ω, Izm<242mA, 1.5W	DO-214AC	1d	1a	Kex
821B	-	1SMA5921B	Zener diode	6.8V±5%, Zzt=2.5Ω, Izm<221mA, 1.5W	403D-02	3d	1f	Ons
821B	-	1SMA5921B	Zener diode	6.8V±5%, Zzt=2.5Ω, Izm<221mA, 1.5W	DO-214AC	1d	1a	Kex
822B	-	1SMA5922B	Zener diode	7.5V±5%, Zzt=3Ω, Izm<200mA, 1.5W	403D-02	3d	1f	Ons
822B	-	1SMA5922B	Zener diode	7.5V±5%, Zzt=3Ω, Izm<200mA, 1.5W	DO-214AC	1d	1a	Kex
823B	-	1SMA5923B	Zener diode	8.2V±5%, Zzt=3.5Ω, Izm<183mA, 1.5W	403D-02	3d	1f	Ons
823B	-	1SMA5923B	Zener diode	8.2V±5%, Zzt=3.5Ω, Izm<183mA, 1.5W	DO-214AC	1d	1a	Kex
824B	-	1SMA5924B	Zener diode	9.1V±5%, Zzt=4Ω, Izm<165mA, 1.5W	403D-02	3d	1f	Ons
824B	-	1SMA5924B	Zener diode	9.1V±5%, Zzt=4Ω, Izm<165mA, 1.5W	DO-214AC	1d	1a	Kex
825B	-	1SMA5925B	Zener diode	10V±5%, Zzt=4.5Ω, Izm<150mA, 1.5W	403D-02	3d	1f	Ons
825B	-	1SMA5925B	Zener diode	10V±5%, Zzt=4.5Ω, Izm<150mA, 1.5W	DO-214AC	1d	1a	Kex
826B	-	1SMA5926B	Zener diode	11V±5%, Zzt=5.5Ω, Izm<136mA, 1.5W	403D-02	3d	1f	Ons
826B	-	1SMA5926B	Zener diode	11V±5%, Zzt=5.5Ω, Izm<136mA, 1.5W	DO-214AC	1d	1a	Kex
827B	-	1SMA5927B	Zener diode	12V±5%, Zzt=6.5Ω, Izm<125mA, 1.5W	403D-02	3d	1f	Ons
827B	-	1SMA5927B	Zener diode	12V±5%, Zzt=6.5Ω, Izm<125mA, 1.5W	DO-214AC	1d	1a	Kex
828B	-	1SMA5928B	Zener diode	13V±5%, Zzt=7Ω, Izm<115mA, 1.5W	403D-02	3d	1f	Ons
828B	-	1SMA5928B	Zener diode	13V±5%, Zzt=7Ω, Izm<115mA, 1.5W	DO-214AC	1d	1a	Kex
829B	-	1SMA5929B	Zener diode	15V±5%, Zzt=9Ω, Izm<100mA, 1.5W	403D-02	3d	1f	Ons
829B	-	1SMA5929B	Zener diode	15V±5%, Zzt=9Ω, Izm<100mA, 1.5W	DO-214AC	1d	1a	Kex
82A	-	1.5SMC82A	TVS	Vrwm=70.1V, Vbr=77.9..86.1V, Ipp=13.3A, 1500W(1ms)	DO-214AB	1d	1b	Mde
82A	-	1.5SMC82A	TVS	Vrwm=70.1V, Vbr=77.9..86.1V, Ipp=13.3A, 1500W(1ms)	403	3d	2t	Ons
82A	-	1.5SMC82A	TVS	Vrwm=70.1V, Vbr=77.9..86.1V, Ipp=13.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
82A	-	1.5SMC82A	TVS	Vrwm=70.1V, Vbr=77.9..86.1V, Ipp=13.3A, 1500W(1ms)	DO-214AB	1d	2s	Lif

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
82A	-	P4SMA82A	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 400W(1ms)	DO-214AC	1d	1k	Vs
82A	-	P4SMA82A	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
82A	-	P6SMB82A	TVS	Vrwm=82V, Vbr=77.9..86.1V, 5.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
82A	-	P6SMB82A	TVS	Vrwm=82V, Vbr=77.9..86.1V, 5.3A, 600W(1ms)	403A	3d	1s	Ons
82A	-	P6SMBJ82A	TVS	Vrwm=82V, Vbr=73.8..90.2V, 5.3A, 600W(1ms)	DO-214AA	1d	1n	Lif
82A	-	SMAJP4KE82A	TVS	Vrwm=70.10V, Vbr=77.90..86.10V, Ipp=3.6A, 400W(1ms)	DO-214AC	1d	1a	Mco
82A	-	SMBJP6KE82A	TVS	Vrwm=70.10V, Vbr=77.90..86.10V, Ipp=5.4A, 600W(1ms)	DO-214AA	1d	1a	Mco
82A	-	SMCJ1.5KE82A	TVS	Vrwm=70.10V, Vbr=77.90..86.10V, Ipp=13.5A, 1500W(1ms)	DO-214AB	1d	1a	Mco
82A	-	SZP6SMB82A	TVS	Vrwm=82V, Vbr=77.9..86.1V, 5.3A, 600W(1ms)	403A	3d	1s	Ons
82A	-	TVP04A820A-G	TVS	Vbr=77.90,,86.10V, Vrwm=70.1V, Ipp=3.54A, 400W(1ms)	DO-214AC	1d	2o	Cmc
82A	-	TVP06B82A-G	TVS	Vrwm=70.1V, Vbr=77.90..86.10V, Ipp=5.31A, 600W(1ms)	DO-214AA	1d	2o	Cmc
82B	-	1SMB3EZ82	Zener diode	82V±5%, Zzt=100Ω, Izt=9.1mA, 3W	DO-214AA	1d	1a	Pjt
82C	-	1.5SMC82CA	TVS	Vrwm=70.1V, Vbr=77.9..86.1V, Ipp=13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
82C	-	1.5SMC82CA	TVS	Vrwm=70.1V, Vbr=77.9..86.1V, Ipp=13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
82C	-	1.5SMC82CA	TVS	Vrwm=70.1V, Vbr=77.9..86.1V, Ipp=13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
82C	-	P4SMA82C	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 3.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
82C	-	P4SMA82CA	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
82C	-	P6SMB82CA	TVS	Vrwm=82V, Vbr=77.9..86.1V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
82C	-	P6SMBJ82C	TVS	Vrwm=82V, Vbr=73.8..90.2V, 5.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
82C	-	SMAJP4KE82CA	TVS	Vrwm=70.10V, Vbr=77.90..86.10V, Ipp=3.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
82C	-	SMBJP6KE82CA	TVS	Vrwm=70.10V, Vbr=77.90..86.10V, Ipp=5.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
82C	-	SMCJ1.5KE82CA	TVS	Vrwm=70.10V, Vbr=77.90..86.10V, Ipp=13.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
82C	-	TVP04A820CA-G	TVS	Vbr=77.90,,86.10V, Vrwm=70.1V, Ipp=3.54A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
82C	-	TVP06B82ACA-G	TVS	Vrwm=70.1V, Vbr=77.90..86.10V, Ipp=5.31A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
82CA	-	P4SMA82CA	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
82CA	-	P6SMB82CA	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
82CA	-	P6SMBJ82CA	TVS	Vrwm=82V, Vbr=73.8..90.2V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
830B	-	1SMA5930B	Zener diode	16V±5%, Zzt=10Ω, Izm<94mA, 1.5W	403D-02	3d	1f	Ons
830B	-	1SMA5930B	Zener diode	16V±5%, Zzt=10Ω, Izm<94mA, 1.5W	DO-214AC	1d	1a	Kex
831B	-	1SMA5931B	Zener diode	18V±5%, Zzt=12Ω, Izm<83mA, 1.5W	403D-02	3d	1f	Ons
831B	-	1SMA5931B	Zener diode	18V±5%, Zzt=12Ω, Izm<83mA, 1.5W	DO-214AC	1d	1a	Kex
832B	-	1SMA5932B	Zener diode	20V±5%, Zzt=14Ω, Izm<75mA, 1.5W	403D-02	3d	1f	Ons
832B	-	1SMA5932B	Zener diode	20V±5%, Zzt=14Ω, Izm<75mA, 1.5W	DO-214AC	1d	1a	Kex
833B	-	1SMA5933B	Zener diode	22V±5%, Zzt=17.5Ω, Izm<68mA, 1.5W	403D-02	3d	1f	Ons
833B	-	1SMA5933B	Zener diode	22V±5%, Zzt=17.5Ω, Izm<68mA, 1.5W	DO-214AC	1d	1a	Kex
834B	-	1SMA5934B	Zener diode	24V±5%, Zzt=19Ω, Izm<63mA, 1.5W	403D-02	3d	1f	Ons
834B	-	1SMA5934B	Zener diode	24V±5%, Zzt=19Ω, Izm<63mA, 1.5W	DO-214AC	1d	1a	Kex
835B	-	1SMA5935B	Zener diode	27V±5%, Zzt=23Ω, Izm<56mA, 1.5W	403D-02	3d	1f	Ons
835B	-	1SMA5935B	Zener diode	27V±5%, Zzt=23Ω, Izm<56mA, 1.5W	DO-214AC	1d	1a	Kex
836B	-	1SMA5936B	Zener diode	30V±5%, Zzt=26Ω, Izm<50mA, 1.5W	403D-02	3d	1f	Ons
836B	-	1SMA5936B	Zener diode	30V±5%, Zzt=26Ω, Izm<50mA, 1.5W	DO-214AC	1d	1a	Kex
837B	-	1SMA5937B	Zener diode	33V±5%, Zzt=33Ω, Izm<45mA, 1.5W	403D-02	3d	1f	Ons
837B	-	1SMA5937B	Zener diode	33V±5%, Zzt=33Ω, Izm<45mA, 1.5W	DO-214AC	1d	1a	Kex
838B	-	1SMA5938B	Zener diode	36V±5%, Zzt=38Ω, Izm<42mA, 1.5W	403D-02	3d	1f	Ons
838B	-	1SMA5938B	Zener diode	36V±5%, Zzt=38Ω, Izm<42mA, 1.5W	DO-214AC	1d	1a	Kex
839B	-	1SMA5939B	Zener diode	39V±5%, Zzt=45Ω, Izm<38mA, 1.5W	403D-02	3d	1f	Ons
839B	-	1SMA5939B	Zener diode	39V±5%, Zzt=45Ω, Izm<38mA, 1.5W	DO-214AC	1d	1a	Kex
840B	-	1SMA5940B	Zener diode	43V±5%, Zzt=53Ω, Izm<35mA, 1.5W	403D-02	3d	1f	Ons
840B	-	1SMA5940B	Zener diode	43V±5%, Zzt=53Ω, Izm<35mA, 1.5W	DO-214AC	1d	1a	Kex
841B	-	1SMA5941B	Zener diode	47V±5%, Zzt=67Ω, Izm<32mA, 1.5W	403D-02	3d	1f	Ons
841B	-	1SMA5941B	Zener diode	47V±5%, Zzt=67Ω, Izm<32mA, 1.5W	DO-214AC	1d	1a	Kex
842B	-	1SMA5942B	Zener diode	51V±5%, Zzt=70Ω, Izm<29mA, 1.5W	403D-02	3d	1f	Ons
842B	-	1SMA5942B	Zener diode	51V±5%, Zzt=70Ω, Izm<29mA, 1.5W	DO-214AC	1d	1a	Kex
843B	-	1SMA5943B	Zener diode	56V±5%, Zzt=86Ω, Izm<27mA, 1.5W	403D-02	3d	1f	Ons
843B	-	1SMA5943B	Zener diode	56V±5%, Zzt=86Ω, Izm<27mA, 1.5W	DO-214AC	1d	1a	Kex
844B	-	1SMA5944B	Zener diode	62V±5%, Zzt=100Ω, Izm<24mA, 1.5W	403D-02	3d	1f	Ons
844B	-	1SMA5944B	Zener diode	62V±5%, Zzt=100Ω, Izm<24mA, 1.5W	DO-214AC	1d	1a	Kex
845B	-	1SMA5945B	Zener diode	68V±5%, Zzt=120Ω, Izm<22mA, 1.5W	403D-02	3d	1f	Ons
845B	-	1SMA5945B	Zener diode	68V±5%, Zzt=120Ω, Izm<22mA, 1.5W	DO-214AC	1d	1a	Kex
85	-	BZX584B5V1	Zener diode	5.0..5.20V, Izt=5mA, Zzt=60Ω, 200mW	SOD-523FL	7d	1a	Tac
85	-	EDZ22B	Zener diode	21.54..22.47V, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Rhm
85	-	EDZV22B	Zener diode	21.54..22.47V, Izt=5.0mA, Zzt=100Ω, 150mW	SOD-523	6d	2v	Rhm
85	-	FDZ22EV	Zener diode	21.540..22.470V, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Fis
85	-	FDZ22VT	Zener diode	21.540..22.470V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Fis
85	-	GDZ4V3B-V-G	Zener diode	4.17..4.43V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	2m	Vs
85	-	LBZT52B22T1G	Zener diode	21.54..22.47V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
85	-	LEDZ22BT1G	Zener diode	21.54..22.47V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
85	-	LUDZS22BT1G	Zener diode	21.54..22.47V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
85	-	MM5Z5V1B	Zener diode	5.0..5.20V, Izt=5mA, Zzt=60Ω, 200mW	SOD-523FL	7d	1a	Tac
85	-	SMBG85	TVS	Vrwm=85V, Vbr=94.4..119.2V, 3.9A, 600W(1ms)	DO-215AA	5d	1a	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
85	-	TDZ22B	Zener diode	22V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
85	-	UDZS22B	Zener diode	21.54..22.47V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Wtr
85	-	UDZS22B	Zener diode	22V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
85	-	UDZV22B	Zener diode	21.54..22.47V, Izt=5.0mA, Zzt=100Ω, 200mW	SOD-323	5d	2v	Rhm
85	-	VDZS22B	Zener diode	22V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
85A	-	1SMC85A	TVS	Vbr=94.4..104V, Vrwm=85V, 10.9A, 1500W(1ms)	DO-214AB	1d	1a	Eic
85A	-	MMF85A	TVS	Vrwm=85V, Vbr=94.4..108.2V, Ipp=1.3A, 200W(1ms)	SOD-123FL	7d	2m	Sst
85A	-	SMAJ85A	TVS	Vrwm=85V, Vbr=94.4..104V, 2.9A, 400W(1ms)	DO-214AC	1d	1a	Sus
85A	-	SMBG85A	TVS	Vrwm=85V, Vbr=94.4..108.2V, 4.4A, 600W(1ms)	DO-215AA	5d	1a	Msc
85A	-	SMBJ85A	TVS	Vrwm=85V, Vbr=94.4..108.2V, 4.4A, 600W(1ms)	DO-214AA	1d	1a	Sus
85A	-	SMCJ85A	TVS	Vrwm=85V, Vbr=94.4..108.2V, 9.9A, 1500W(1ms)	DO-214AB	1d	1k	Sus
85A	-	SMF85A	TVS	Vbr=94.4..104V, Vrwm=85V, Ipp=1.3A, 200W(1ms)	SOD-123FL	7d	1a	Mco
85A	-	UMA85A	TVS	Vrwm=85V, Vbr=94.4..137V, 3.6A, 500W(1ms)	UltraMite	14d	1v	Msc
85C	-	SMBG85C	TVS	Vrwm=85V, Vbr=94.4..119.2V, 3.9A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
85CA	-	1SMC85CA	TVS	Vbr=94.4..104V, Vrwm=85V, 10.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
85CA	-	MMF85CA	TVS	Vrwm=85V, Vbr=94.4..108.2V, Ipp=1.3A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
85CA	-	SMAJ85CA	TVS	Vrwm=85V, Vbr=94.4..104V, 2.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
85CA	-	SMBG85CA	TVS	Vrwm=85V, Vbr=94.4..108.2V, 4.4A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
85CA	-	SMBJ85CA	TVS	Vrwm=85V, Vbr=94.4..108.2V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
85CA	-	SMCJ85CA	TVS	Vrwm=85V, Vbr=94.4..115V, 9.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
85CA	-	SMF85CA	TVS	Vbr=94.4..104V, Vrwm=85V, Ipp=1.3A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
85CA	-	UMA85CA	TVS	Vrwm=85V, Vbr=94.4..137V, 3.6A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
85V	-	SMA85	TVS	Vbr=94.4..115V, Vrwm=85.0V, 2A, 300W(1ms)	DO-214AC	1d	1a	Mic
85V	-	SMB85	TVS	Vbr=94.4..115V, Vrwm=85V, 4A, 600W(1ms)	DO-214AA	1d	1a	Mic
85V	-	SMC85	TVS	Vbr=94.4..115V, Vrwm=85V, 9.9A, 1500W(1ms)	DO-214AB	1d	1a	Mic
85VA	-	SMA85A	TVS	Vbr=94.4..104V, Vrwm=85.0V, 2.2A, 300W(1ms)	DO-214AC	1d	1a	Mic
85VA	-	SMB85A	TVS	Vbr=94.4..104V, Vrwm=85V, 4.4A, 600W(1ms)	DO-214AA	1d	1a	Mic
85VA	-	SMC85A	TVS	Vbr=94.4..104V, Vrwm=85V, 10.9A, 1500W(1ms)	DO-214AB	1d	1a	Mic
85VC	-	SMA85C	TVS	Vbr=94.4..115V, Vrwm=85.0V, 2A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
85VC	-	SMB85C	TVS	Vbr=94.4..115V, Vrwm=85V, 4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
85VC	-	SMC85C	TVS	Vbr=94.4..115V, Vrwm=85V, 9.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
85VCA	-	SMA85CA	TVS	Vbr=94.4..104V, Vrwm=85.0V, 2.2A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
85VCA	-	SMB85CA	TVS	Vbr=94.4..104V, Vrwm=85V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
85VCA	-	SMC85CA	TVS	Vbr=94.4..104V, Vrwm=85V, 10.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
87	-	MMPZ5269SPT	Zener diode	85.26..88.74V, Izt=1.4mA, Zzt=370Ω, 225mW	SOD-323	5d	1a	Chm
87C	-	BZT52C8V7WS	Zener diode	8.27..9.14V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
87C	-	BZT52C8V7WT	Zener diode	8.27..9.14V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Ttr
88	-	BBY58-02W	C-diode	VCO-tuning, 10V, 20mA, 17.5..19.3pF(4..1V)	SCD-80	6d	1u	Inf
8A	-	MM3Z9V1B	Zener diode	8.85..9.23V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323FL	7d	1a	Lge
8A2	-	RKZ8.2AKU	Zener diode	7.53..7.92V, Izt=20mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
8B	-	CDZ55C8V2T	Zener diode	7.79..8.61V, Zzt=7Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
8B	-	MA2ZV05	C-diode	VCO, 6V, 18.5/3.6pF(1/4V), 0.65Ω(470MHz)	SOD-123	5d	1a	Pan
8B	-	MM3Z10B	Zener diode	9.77..10.21V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323FL	7d	1a	Lge
8B	-	STZ8100B	Zener diode	9.75..10.25V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Jiy
8B2	-	RKZ8.2BKU	Zener diode	7.78..8.19V, Izt=20mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
8C	-	GBLC08C	TVS	Vrwm=8V, 17A, 350W(1ms), 3pF, Bidir.	SOD-323	5ba	1e	Prt
8C	-	MA2ZV06	C-diode	VCO, 6V, 37/14pF(1/4V), 0.3Ω(470MHz)	SOD-123	5d	1a	Pan
8C	-	MM3Z11B	Zener diode	10.76..11.22V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323FL	7d	1a	Lge
8C2	-	RKZ8.2CKU	Zener diode	8.03..8.45V, Izt=20mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
8D	-	MM3Z12B	Zener diode	11.74..12.24V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323FL	7d	1a	Lge
8D	-	STZ8120B	Zener diode	11.73..12.33V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Jiy
8E	-	MM3Z13B	Zener diode	12.91..13.49V, Izt=5mA, Zzt=37Ω, 300mW	SOD-323FL	7d	1a	Lge
8F	-	MM3Z15B	Zener diode	14.34..14.98V, Izt=5mA, Zzt=42Ω, 300mW	SOD-323FL	7d	1a	Lge
8H	-	MM3Z16B	Zener diode	15.85..16.51V, Izt=5mA, Zzt=50Ω, 300mW	SOD-323FL	7d	1a	Lge
8H	-	STZ8160B	Zener diode	15.7..16.5V, Izt=5mA, Zzt=50Ω, 300mW	SOD-323	5d	1a	Jiy
8J	-	MM3Z18B	Zener diode	17.56..18.35V, Izt=5mA, Zzt=65V, 300mW	SOD-323FL	7d	1a	Lge
8J	-	STZ8180B	Zener diode	17.55..18.45V, Izt=5mA, Zzt=60Ω, 300mW	SOD-323	5d	1a	Jiy
8K	-	MM3Z20B	Zener diode	19.52..20.39V, Izt=5mA, Zzt=85Ω, 300mW	SOD-323FL	7d	1a	Lge
8K	-	STZ8200B	Zener diode	19.5..20.5V, Izt=5mA, Zzt=80Ω, 300mW	SOD-323	5d	1a	Jiy
8LU07	-	KP8LU07	Thy-SPD	V Of-St=65V, Ifsm=80A(1ms), Ih=100mA, Bidir.	2F	1ba	1l	Shi
8M	-	MM3Z22B	Zener diode	21.54..22.47V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323FL	7d	1a	Lge
8M	-	STZ8220B	Zener diode	21.45..22.55V, Izt=5mA, Zzt=8Ω, 300mW	SOD-323	5d	1a	Jiy
8N	-	CMDZ2L0	Zener diode	1.900..2.100V, Izt=0.5mA, Zzt=1100Ω, 250mW	SOD-323	5d	1a	Cen
8N	-	MM3Z24B	Zener diode	23.72..24.78V, Izt=5mA, Zzt=120Ω, 300mW	SOD-323FL	7d	1a	Lge
8P	-	CMDZ36L	Zener diode	34.20..37.80V, Izt=0.5mA, Zzt=300Ω, 250mW	SOD-323	5d	1a	Cen
8P	-	KDZ5.6FVY	Zener diode	5.49..5.73V, Izt=5mA, Zzt=40Ω, 100mW	TFSC	7d	1a	Kec
8P	-	MM3Z27B	Zener diode	26.19..27.53V, Izt=5mA, Zzt=150Ω, 300mW	SOD-323FL	7d	1a	Lge
8P2	-	SML4738	Zener diode	8.2V±5%, Izt=31mA, Zzt=4.5Ω, 1W	DO-214AC	1d	1k	Vs
8R	-	1N5819WB	Si-diode	SBR, 40V, 1A, Vf<0.6V(1A), 120pF	SOD-123FL	7d	1a	Sme
8R	-	MA2Z304	C-diode	VCO, 30V, 24/6pF(1/4V), 1Ω(100MHz)	SOD-123	5d	1a	Pan

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
8R	-	MA304	C-diode	VCO, 30V, 24/6pF(1/4V), 1Ω(100MHz)	SOD-123	5d	1a	Pan
8R	-	MM3Z30B	Zener diode	29.19..30.69V, Izt=5mA, Zzt=200Ω, 300mW	SOD-323FL	7d	1a	Lge
8V0	-	SMA8.0	TVS	Vbr=8.89..10.9V, Vrwm=8.0V, 20A, 300W(1ms)	DO-214AC	1d	1a	Mic
8V0	-	SMB8.0	TVS	Vbr=8.89..10.9V, Vrwm=8V, 40A, 600W(1ms)	DO-214AA	1d	1a	Mic
8V0	-	SMC8.0	TVS	Vbr=8.89..10.9V, Vrwm=8V, 100A, 1500W(1ms)	DO-214AB	1d	1a	Mic
8V0A	-	SMA8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 22.1A, 300W(1ms)	DO-214AC	1d	1a	Mic
8V0A	-	SMB8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8V, 44.1A, 600W(1ms)	DO-214AA	1d	1a	Mic
8V0A	-	SMC8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8V, 110.3A, 1500W(1ms)	DO-214AB	1d	1a	Mic
8V0C	-	SMA8.0C	TVS	Vbr=8.89..10.9V, Vrwm=8.0V, 20A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
8V0C	-	SMA8.5C	TVS	Vbr=9.44..11.5V, Vrwm=8.5V, 18.9A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
8V0C	-	SMB8.0C	TVS	Vbr=8.89..10.9V, Vrwm=8V, 40A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
8V0C	-	SMC8.0C	TVS	Vbr=8.89..10.9V, Vrwm=8V, 100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
8V0CA	-	SMA8.0CA	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 22.1A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
8V0CA	-	SMA8.5CA	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 20.8A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
8V0CA	-	SMB8.0CA	TVS	Vbr=8.89..9.83V, Vrwm=8V, 44.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
8V0CA	-	SMC8.0CA	TVS	Vbr=8.89..9.83V, Vrwm=8V, 110.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
8V2	-	BZD27C8V2P	Zener diode	7.79..8.61V, Zzt=2Ω, Izt=100mA, 800mW	SOD-123FL	7d	1a	Pjt
8V2	-	BZY55-C8V2	Zener diode	7.79..8.61V, Izt=5mA, Zzt=7Ω, 500mW	0805	70d	2d	Tsc
8V2	-	CDZ55C8V2	Zener diode	7.79..8.61V, Zzt=7Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
8V2	-	CDZ55C8V2S	Zener diode	7.79..8.61V, Zzt=7Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
8V2	-	CTZ55C8V2	Zener diode	7.79..8.61V, Izt=5mA, Zzt=7Ω, 500mW	1206	70d	2d	Ctc
8V2	-	CZRNC55C8V2-G	Zener diode	7.79..8.61V, Zt=7Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
8V2	-	CZRSC55C8V2-G	Zener diode	7.79..8.61V, Zt=7Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc
8V2	-	DFLZ8V2	Zener diode	8.2V±5%, Izt=100mA, Zzt<2Ω, 1W	SOD-123FL	7d	1d	Mco
8V2	-	MFPZ8V2	Zener diode	7.79..8.61V, Izt=100mA, Zzt=2Ω, 800mW	SOD-123FL	7d	1a	Ttr
8V2	-	P6SMBJ8V2	TVS	Vrwm=8.2V, Vbr=7.38..9.02V, 48A, 600W(1ms)	DO-214AA	1d	1n	Lif
8V2A	-	1.5SMC8.2A	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=124A, 1500W(1ms)	DO-214AB	1d	2s	Lif
8V2A	-	1.5SMC8.2A	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=124A, 1500W(1ms)	DO-214AB	1d	1b	Mde
8V2A	-	1.5SMC8.2A	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=124A, 1500W(1ms)	DO-214AB	1d	1k	Vs
8V2A	-	1.5SMC8.2A	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=124A, 1500W(1ms)	403	3d	2t	Ons
8V2A	-	P4SMA8.2A	TVS	Vbr=7.79..8.61V, Vrwm=8.2V, 33.1A, 400W (1ms)	DO-214AC	1d	1k	Vs
8V2A	-	P6SMB8.2A	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 49.6A, 600W(1ms)	403A	3d	1s	Ons
8V2A	-	P6SMB8.2A	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 49.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
8V2A	-	P6SMBJ8V2A	TVS	Vrwm=8.2V, Vbr=7.38..9.02V, 50A, 600W(1ms)	DO-214AA	1d	1n	Lif
8V2A	-	SMAJP4KE8.2A	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=33.9A, 400W(1ms)	DO-214AC	1d	1a	Mco
8V2A	-	SMBJP6KE8.2A	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=50.4A, 600W(1ms)	DO-214AA	1d	1a	Mco
8V2A	-	SMCJ1.5KE8.2A	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=125.6A, 1500W(1ms)	DO-214AB	1d	1a	Mco
8V2A	-	SZP6SMB8.2A	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 49.6A, 600W(1ms)	403A	3d	1s	Ons
8V2A	-	TVP04A8V2A-G	TVS	Vbr=7.79..8.61V, Vrwm=7.0V, Ipp=33.06A, 400W(1ms)	DO-214AC	1d	2o	Cmc
8V2A	-	TVP06B8V2A-G	TVS	Vrwm=7.0V, Vbr=7.79..8.61V, Ipp=49.59A, 600W(1ms)	DO-214AA	1d	2o	Cmc
8V2B	-	BZT52B8V2	Zener diode	8.04..8.36V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tsc
8V2B	-	MMSZ8V2BW	Zener diode	8.04..8.36V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tac
8V2B	-	Z3SMB8.2B	Zener diode	7.79..8.61V, Izt=91mA, Zzt=2Ω, 3W	DO-214AA	1d	1a	Ttr
8V2C	-	1.5SMC8.2CA	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=124A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
8V2C	-	1.5SMC8.2CA	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=124A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
8V2C	-	1.5SMC8.2CA	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=124A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
8V2C	-	P4SMA8.2CA	TVS	Vbr=7.79..8.61V, Vrwm=8.2V, 33.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1l	Vs
8V2C	-	P6SMB8.2CA	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 49.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
8V2C	-	P6SMBJ8V2C	TVS	Vrwm=8.2V, Vbr=7.38..9.02V, 48A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
8V2C	-	SMAJP4KE8.2CA	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=33.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
8V2C	-	SMBJP6KE8.2CA	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=50.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
8V2C	-	SMCJ1.5KE8.2CA	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=125.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
8V2C	-	TVP04A8V2CA-G	TVS	Vbr=7.79..8.61V, Vrwm=7.0V, Ipp=33.06A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
8V2C	-	TVP06B8V2ACA-G	TVS	Vrwm=7.0V, Vbr=7.79..8.61V, Ipp=49.59A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
8V2CA	-	P6SMBJ8V2CA	TVS	Vrwm=8.2V, Vbr=7.38..9.02V, 50A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
8V2Z	-	BZT52C8V2	Zener diode	7.79..8.61V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tsc
8V2Z	-	MMSZ8V2CW	Zener diode	7.79..8.61V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tac
8V2Z	-	TCMMSZ8V2	Zener diode	8.2V±5%, Izt=5mA, Zzt=14Ω, 500mW	SOD-123FL	7d	1a	Tac
8V2Z	-	ZGFM058V2C-MH	Zener diode	7.79..8.61V, Izt=5mA, Zzt=14Ω, 500mW	SOD-123	5d	1a	Pic
8V5	-	SMA8.5	TVS	Vbr=9.44..11.5V, Vrwm=8.5V, 18.9A, 300W(1ms)	DO-214AC	1d	1a	Mic
8V5	-	SMB8.5	TVS	Vbr=9.44..11.5V, Vrwm=8.5V, 37.7A, 600W(1ms)	DO-214AA	1d	1a	Mic
8V5	-	SMC8.5	TVS	Vbr=9.44..11.5V, Vrwm=8.5V, 94.3A, 1500W(1ms)	DO-214AB	1d	1a	Mic
8V5A	-	SMA8.5A	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 20.8A, 300W(1ms)	DO-214AC	1d	1a	Mic
8V5A	-	SMB8.5A	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 41.7A, 600W(1ms)	DO-214AA	1d	1a	Mic
8V5A	-	SMC8.5A	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 104.2A, 1500W(1ms)	DO-214AB	1d	1a	Mic
8V5C	-	SMB8.5C	TVS	Vbr=9.44..11.5V, Vrwm=8.5V, 37.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
8V5C	-	SMC8.5C	TVS	Vbr=9.44..11.5V, Vrwm=8.5V, 94.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
8V5CA	-	SMB8.5CA	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 41.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
8V5CA	-	SMC8.5CA	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 104.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
8V7	-	BZD27C8V7P	Zener diode	8.27..9.14V, Zzt=3Ω, Izt=50mA, 800mW	SOD-123FL	7d	1a	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
8V7	-	MFPZ8V7	Zener diode	8.27..9.14V, Izt=50mA, Zzt=3Ω, 800mW	SOD-123FL	7d	1a	Ttr
8V7B	-	Z3SMB8.7B	Zener diode	8.27..9.14V, Izt=85mA, Zzt=2Ω, 3W	DO-214AA	1d	1a	Ttr
8X	-	MM3Z33B	Zener diode	32.15..33.79V, Izt=5mA, Zzt=250Ω, 300mW	SOD-323FL	7d	1a	Lge
8X	-	STZ8330B	Zener diode	32.2..33.8V, Izt=2mA, Zzt=200Ω, 300mW	SOD-323	5d	1a	Jiy
8Y	-	KDZ18VVY	Zener diode	17.56..18.35V, Izt=5mA, Zzt=20Ω, 100mW	VSC	7d	1a	Kec
8Y	-	MM3Z36B	Zener diode	35.07..36.87V, Izt=5mA, Zzt=300Ω, 300mW	SOD-323FL	7d	1a	Lge
8Y	-	STZ8360B	Zener diode	35.1..36.9V, Izt=2mA, Zzt=250Ω, 300mW	SOD-323	5d	1a	Jiy
8Z	-	BZT52B5V1S	Zener diode	5.0..5.20V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323FL	7d	1a	Tsc
8Z	-	MM3Z39B	Zener diode	37.0..41.0V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323FL	7d	1a	Lge
8Z	-	MM3Z5V1B	Zener diode	5.0..5.20V, Zzt=56Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
8Z	-	MM3Z5V1BW	Zener diode	5.0..5.20V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323FL	7d	1a	Tac
8Z	-	TCMM3Z5V1B	Zener diode	5.1V±2%, Izt=5mA, Zzt=56Ω, 200mW	SOD-323FL	7d	1a	Tac
9	-	BB179	C-diode	TV-VHF-tuning, 32V, 20mA, 34.5..2.3pF(1..28V), 460MHz	SOD-523	6d	1a	Phi
9	-	KDZ16FV	Zener diode	15.30..17.10V, Izt=5mA, Zzt=18Ω, 100mW	TFSC	7d	1a	Kec
9	-	MAZS091	Zener diode	8.5..9.6V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
9	-	MMPZ5230SPT	Zener diode	4.606..4.794V, Izt=5mA, Zzt=70Ω, 225mW	SOD-323	5d	1a	Chm
9	-	MMSZ5250BPT	Zener diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 225mW	SOD-523	6d	1a	Chm
9-	-	MAZS0910M	Zener diode	8.87..9.33V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
9.	-	MMSZ5250SPT	Zener diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 225mW	SOD-523	6d	1a	Chm
9.0	-	SMBG9.0	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms)	DO-215AA	5d	1a	Msc
9.0A	-	1SMC9.0A	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 97.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
9.0A	-	MMF9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, Ipp=13A, 200W(1ms)	SOD-123FL	7d	2m	Sst
9.0A	-	SMAJ9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, 26.0A, 400W(1ms)	DO-214AC	1d	1j	Sus
9.0A	-	SMBG9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms)	DO-215AA	5d	1a	Msc
9.0A	-	SMBJ9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms)	DO-214AA	1d	1a	Sus
9.0A	-	SMCJ9.0A	TVS	Vrwm=9V, Vbr=10.0..12.2V, 88.8A, 1500W(1ms)	DO-214AB	1d	1k	Sus
9.0A	-	SMF9.0A	TVS	Vbr=10..11.1V, Vrwm=9.0V, Ipp=13A, 200W(1ms)	SOD-123FL	7d	1a	Mco
9.0C	-	SMBG9.0C	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
9.0CA	-	1SMC9.0CA	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 97.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
9.0CA	-	MMF9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, Ipp=13A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
9.0CA	-	SMAJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, 26.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
9.0CA	-	SMBG9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
9.0CA	-	SMBJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
9.0CA	-	SMCJ9.0CA	TVS	Vrwm=9V, Vbr=10.0..12.2V, 88.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
9.0CA	-	SMF9.0CA	TVS	Vbr=10..11.1V, Vrwm=9.0V, Ipp=13A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
9.1	-	MAZ5091	Zener diode	8.5..9.6V, Zzt=6Ω(5mA), 500mW	MP2	11d	1a	Pan
9.1	-	MAZ80910H	Zener diode	9.14..9.6V, Zzt=20Ω(5mA), 150mW	SC-76	6d	1a	Pan
9.1	-	MAZY091	Zener diode	8.2..10.1V, Zzt=30Ω(10mA), 1W	NMiniP2	1d	1a	Pan
9.1	-	P4SMA9.1	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 30.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
9.1	-	U1ZB9.1	Zener diode	8.2..10.1V, Izt=10mA, 1W	3-4D1A	1d	2fa	Tos
9.1A	-	P4SMA9.1A	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 31.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
9.1A	-	P6SMB9.1A	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 45.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
9.1B	-	HZF9.1BP	Zener diode	9.1V±5%, Iz=40mA, 900mW	LRP	1d	2f	Ren
9.1B	-	PTZ9.1B	Zener diode	9.1V±10%, Izt=40mA, 1W	DO-214AC	1d	1a	Rhm
9.1C	-	HZF9.1CP	Zener diode	9.1V±10%, Iz=40mA, 900mW	LRP	1d	2f	Ren
9.1C	-	P4SMA9.1C	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 30.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
9.1CA	-	P4SMA9.1CA	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 31.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
9.1CA	-	P6SMB9.1CA	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 45.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
9.1G	-	ZD9.1G-CA2	Zener diode	9.1V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOD-123	5d	1a	Utc
9.1G	-	ZD9.1G-CB2	Zener diode	9.1V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOD-323	5d	1a	Utc
9.1L	-	ZD9.1L-CA2	Zener diode	9.1V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOD-123	5d	1a	Utc
9.1L	-	ZD9.1L-CB2	Zener diode	9.1V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOD-323	5d	1a	Utc
9^	-	MAZS0910H	Zener diode	9.14..9.6V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
9^1	-	MAZ80910H	Zener diode	9.14..9.6V, Zzt=20Ω(5mA), 150mW	SC-76	6d	1a	Pan
9^1	-	MAZ8091GHL	Zener diode	9.14..9.6V, Zzt=20Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
9_	-	MAZS0910L	Zener diode	8.58..9.02V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
9_1	-	MAZ80910L	Zener diode	8.58..9.52V, Zzt=20Ω(5mA), 150mW	SC-76	6d	1a	Pan
9_1	-	MAZ8091GLL	Zener diode	8.58..9.52V, Zzt=20Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
9•1	-	RKZ9.1B2KG	Zener diode	8.85..9.23V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	2e	Ren
9•1	-	RKZ9.1B2KJ	Zener diode	8.85..9.23V, Izt=5mA, Zzt=30Ω, 150mW	UFP	7d	2e	Ren
9•1	am	HZU9.1B3	Zener diode	9.15..9.55V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
9•1	an	HZU9.1B2	Zener diode	8.85..9.23V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
9•1	ao	HZU9.1B1	Zener diode	8.56..8.93V, Izt=5mA, Zzt=30Ω, 200mW	URP	5d	1a	Ren
90	-	SMBG90	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms)	DO-215AA	5d	1a	Msc
90A	-	1SMC90A	TVS	Vbr=100..111V, Vrwm=90V, 10.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
90A	-	MMF90A	TVS	Vrwm=90V, Vbr=100.0..115.5V, Ipp=1.2A, 200W(1ms)	SOD-123FL	7d	2m	Sst
90A	-	SMAJ90A	TVS	Vrwm=90V, Vbr=100..111V, 2.7A, 400W(1ms),	DO-214AC	1d	1a	Sus
90A	-	SMBG90A	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms)	DO-215AA	5d	1a	Msc
90A	-	SMBJ90A	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms)	DO-214AA	1d	1a	Sus
90A	-	SMCJ90A	TVS	Vrwm=90V, Vbr=100..122V, 9.4A, 1500W(1ms)	DO-214AB	1d	1k	Sus

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
90A	-	SMF90A	TVS	Vbr=100..111V, Vrwm=90V, Ipp=1.2A, 200W(1ms)	SOD-123FL	7d	1a	Mco
90A	-	UMA90A	TVS	Vrwm=90V, Vbr=100..146V, 3.4A, 500W(1ms)	UltraMite	14d	1v	Msc
90CA	-	1SMC90CA	TVS	Vbr=100..111V, Vrwm=90V, 10.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
90CA	-	MMF90CA	TVS	Vrwm=90V, Vbr=100.0..115.5V, Ipp=1.2A, 200W(1ms), Bidirectional	SOD-123FL	7ba	1j	Sst
90CA	-	SMAJ90CA	TVS	Vrwm=90V, Vbr=100..111V, 2.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sus
90CA	-	SMBG90CA	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms), Bidir.	DO-215AA	5ba	1j	Msc
90CA	-	SMBJ90CA	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sus
90CA	-	SMCJ90CA	TVS	Vrwm=90V, Vbr=100..122V, 9.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Sus
90CA	-	SMF90CA	TVS	Vbr=100..111V, Vrwm=90V, Ipp=1.2A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Mco
90CA	-	UMA90CA	TVS	Vrwm=90V, Vbr=100..146V, 3.4A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
90V	-	SMA90	TVS	Vbr=100..122V, Vrwm=90V, 1.9A, 300W(1ms)	DO-214AC	1d	1a	Mic
90V	-	SMB90	TVS	Vbr=100..122V, Vrwm=90V, 3.8A, 600W(1ms)	DO-214AA	1d	1a	Mic
90V	-	SMC90	TVS	Vbr=100..122V, Vrwm=90V, 9.4A, 1500W(1ms)	DO-214AB	1d	1a	Mic
90VA	-	SMA90A	TVS	Vbr=100..111V, Vrwm=90V, 2.1A, 300W(1ms)	DO-214AC	1d	1a	Mic
90VA	-	SMB90A	TVS	Vbr=100..111V, Vrwm=90V, 4.1A, 600W(1ms)	DO-214AA	1d	1a	Mic
90VA	-	SMC90A	TVS	Vbr=100..111V, Vrwm=90V, 10.3A, 1500W(1ms)	DO-214AB	1d	1a	Mic
90VC	-	SMA90C	TVS	Vbr=100..122V, Vrwm=90V, 1.9A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
90VC	-	SMB90C	TVS	Vbr=100..122V, Vrwm=90V, 3.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
90VC	-	SMC90C	TVS	Vbr=100..122V, Vrwm=90V, 9.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
90VCA	-	SMA90CA	TVS	Vbr=100..111V, Vrwm=90V, 2.1A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
90VCA	-	SMB90CA	TVS	Vbr=100..111V, Vrwm=90V, 4.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
90VCA	-	SMC90CA	TVS	Vbr=100..111V, Vrwm=90V, 10.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
91	-	HZC9.1	Zener diode	9.1V±10%, Iz=5mA, 150mW	SOD-523	6d	1a	Ren
91	-	HZU9.1G	Zener diode	8.56..9.55V, Izt=5mA, 200mW	SOD-323	5d	1a	Ren
91	-	KDZ16FVY	Zener diode	15.85..16.51V, Izt=5mA, Zzt=18Ω, 100mW	TFSC	7d	1a	Kec
91	-	KDZ9.1EV	Zener diode	8.5..9.6V, Izt=5mA, 150mW	SOD-523	6d	1a	Kec
91	-	KDZ9.1V	Zener diode	8.5..9.6V, Izt=5mA, 150mW	SOD-323	5d	1a	Kec
91	-	MMPZ5270SPT	Zener diode	89.18..92.82V, Izt=1.4mA, Zzt=400Ω, 225mW	SOD-323	5d	1a	Chm
91	-	P4SMA91	TVS	Vbr=81.9..100V, Vrwm=73.7V, 3.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
91	-	P6SMBJ91	TVS	Vrwm=91V, Vbr=81.9..100V, 4.5A, 600W(1ms)	DO-214AA	1d	1n	Lif
91	-	SML4763	Zener diode	91V±5%, Izt=2.8mA, Zzt=250Ω, 1W	DO-214AC	1d	1k	Vs
91	-	TZD9.1WS	Zener diode	8.50..9.60V, Izt=5mA, Zzt=18Ω, 200mW	SOD-323	5d	1a	Ttr
91	-	TZD9.1WT	Zener diode	8.50..9.60V, Izt=5mA, Zzt=18Ω, 150mW	SOD-523	6d	1a	Ttr
91	-	USFZ9.1V	Zener diode	9.1V±10%, Izt=10mA, 500mW	USF	8d	1c	Kec
91	-	ZV931V2TA	C-diode	VHF-tuning, 12V, 6.5/7.8pF(2.5V)	SOD-523	6d	1a	Zx
91	ax	CRY91	Zener diode	8.2..10V, Izt=10mA, 700mW	S-FLAT	6d	1a	Tos
9-1	-	MAZ80910M	Zener diode	8.87..9.33V, Zzt=20Ω(5mA), 150mW	SC-76	6d	1a	Pan
9-1	-	MAZ8091GML	Zener diode	8.87..9.33V, Zzt=20Ω(5mA), 150mW	SMini2-F3	6d	1a	Pan
91•	-	TZD9.1YWS	Zener diode	8.85..9.23V, Izt=5mA, Zzt=18Ω, 200mW	SOD-323	5d	1a	Ttr
91•	-	TZD9.1YWT	Zener diode	8.85..9.23V, Izt=5mA, Zzt=18Ω, 150mW	SOD-523	6d	1a	Ttr
913	-	1PMT5913B	Zener diode	3.3V±5%, Izt=454mA, 2.5W	DO-216AA	4d	1a	Msc
913A	-	1SMB5913A	Zener diode	3.3V±10%, Izt=113.6mA, Zzt=10Ω, 3W	DO-214AA	1d	1a	Eic
913B	-	1PMT5913B	Zener diode	3.3V±5%, Izt=454mA, 2.5W	DO-216AA	4d	1g	Mot
913B	-	1SMB5913B	Zener diode	3.3V±5%, Izt=113.6mA, Zzt=10Ω, 3W	403A-03	3d	1s	Ons
913B	-	SMBJ5913B	Zener diode	3.3V±5%, Izt=113.6mA, Zzt=10.0Ω, 1.5W	DO-214AA	1d	1w	Mco
913B	-	Z3SMB5913B	Zener diode	3.13..3.47V, Izt=113.6mA, 3W	DO-214AA	1d	1a	Ttr
914	-	1PMT5914B	Zener diode	3.6V±5%, Izt=416mA, 2.5W	DO-216AA	4d	1a	Msc
914A	-	1SMA5914	Zener diode	3.6V±10%, Zzt=9Ω, Izm<417mA, 1.5W	DO-214AC	1d	1a	Pjt
914A	-	1SMB5914A	Zener diode	3.6V±10%, Izt=104.2mA, Zzt=9Ω, 3W	DO-214AA	1d	1a	Eic
914A	-	Z1.5SMA5914B	Zener diode	3.42..3.78V, Izt=104.2mA, 1.5W	DO-214AC	1d	1a	Ttr
914B	-	1PMT5914B	Zener diode	3.6V±5%, Izt=416mA, 2.5W	DO-216AA	4d	1g	Mot
914B	-	1SMB5914B	Zener diode	3.6V±5%, Izt=104.2mA, Zzt=9Ω, 3W	403A-03	3d	1s	Ons
914B	-	SMBJ5914B	Zener diode	3.6V±5%, Izt=104.2mA, Zzt=9.0Ω, 1.5W	DO-214AA	1d	1w	Mco
914B	-	Z3SMB5914B	Zener diode	3.42..3.78V, Izt=104.2mA, 3W	DO-214AA	1d	1a	Ttr
915	-	1PMT5915B	Zener diode	3.9V±5%, Izt=384mA, 2.5W	DO-216AA	4d	1a	Msc
915A	-	1SMA5915	Zener diode	3.9V±10%, Zzt=7.5Ω, Izm<385mA, 1.5W	DO-214AC	1d	1a	Pjt
915A	-	1SMB5915A	Zener diode	3.9V±10%, Izt=96.1mA, Zzt=7.5Ω, 3W	DO-214AA	1d	1a	Eic
915A	-	Z1.5SMA5915B	Zener diode	3.71..4.10V, Izt=96.1mA, 1.5W	DO-214AC	1d	1a	Ttr
915B	-	1PMT5915B	Zener diode	3.9V±5%, Izt=384mA, 2.5W	DO-216AA	4d	1g	Mot
915B	-	1SMB5915B	Zener diode	3.9V±5%, Izt=96.1mA, Zzt=7.5Ω, 3W	403A-03	3d	1s	Ons
915B	-	SMBJ5915B	Zener diode	3.9V±5%, Izt=96.1mA, Zzt=7.5Ω, 1.5W	DO-214AA	1d	1w	Mco
915B	-	Z3SMB5915B	Zener diode	3.70..4.10V, Izt=96.1mA, 3W	DO-214AA	1d	1a	Ttr
916	-	1PMT5916B	Zener diode	4.3V±5%, Izt=348mA, 2.5W	DO-216AA	4d	1a	Msc
916A	-	1SMA5916	Zener diode	4.3V±10%, Zzt=6Ω, Izm<349mA, 1.5W	DO-214AC	1d	1a	Pjt
916A	-	1SMB5916A	Zener diode	4.3V±10%, Izt=87.2mA, Zzt=6Ω, 3W	DO-214AA	1d	1a	Eic
916A	-	Z1.5SMA5916B	Zener diode	4.09..4.52V, Izt=87.2mA, 1.5W	DO-214AC	1d	1a	Ttr
916B	-	1PMT5916B	Zener diode	4.3V±5%, Izt=348mA, 2.5W	DO-216AA	4d	1g	Mot
916B	-	1SMB5916B	Zener diode	4.3V±5%, Izt=87.2mA, Zzt=6Ω, 3W	403A-03	3d	1s	Ons
916B	-	SMBJ5916B	Zener diode	4.3V±5%, Izt=87.2mA, Zzt=6.0Ω, 1.5W	DO-214AA	1d	1w	Mco
916B	-	Z3SMB5916B	Zener diode	4.08..4.52V, Izt=87.2mA, 3W	DO-214AA	1d	1a	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
917	-	1PMT5917B	Zener diode	4.7V±5%, Izt=319mA, 2.5W	DO-216AA	4d	1a	Msc
917A	-	1SMA5917	Zener diode	4.7V±10%, Zzt=5Ω, Izm<319mA, 1.5W	DO-214AC	1d	1a	Pjt
917A	-	1SMB5917A	Zener diode	4.7V±10%, Izt=79.8mA, Zzt=5Ω, 3W	DO-214AA	1d	1a	Eic
917A	-	Z1.5SMA5917B	Zener diode	4.47..4.94V, Izt=79.8mA, 1.5W	DO-214AC	1d	1a	Ttr
917B	-	1PMT5917B	Zener diode	4.7V±5%, Izt=319mA, 2.5W	DO-216AA	4d	1g	Mot
917B	-	1SMB5917B	Zener diode	4.7V±5%, Izt=79.8mA, Zzt=5Ω, 3W	403A-03	3d	1s	Ons
917B	-	SMBJ5917B	Zener diode	4.7V±5%, Izt=79.8mA, Zzt=5.0Ω, 1.5W	DO-214AA	1d	1w	Mco
917B	-	Z3SMB5917B	Zener diode	4.46..4.94V, Izt=79.8mA, 3W	DO-214AA	1d	1a	Ttr
918	-	1PMT5918B	Zener diode	5.1V±5%, Izt=294mA, 2.5W	DO-216AA	4d	1a	Msc
918A	-	1SMA5918	Zener diode	5.1V±10%, Zzt=4Ω, Izm<294mA, 1.5W	DO-214AC	1d	1a	Pjt
918A	-	1SMB5918A	Zener diode	5.1V±10%, Izt=73.5mA, Zzt=4Ω, 3W	DO-214AA	1d	1a	Eic
918A	-	Z1.5SMA5918B	Zener diode	4.85..5.36V, Izt=73.5mA, 1.5W	DO-214AC	1d	1a	Ttr
918B	-	1PMT5918B	Zener diode	5.1V±5%, Izt=294mA, 2.5W	DO-216AA	4d	1g	Mot
918B	-	1SMB5918B	Zener diode	5.1V±5%, Izt=73.5mA, Zzt=4Ω, 3W	403A-03	3d	1s	Ons
918B	-	SMBJ5918B	Zener diode	5.1V±5%, Izt=73.5mA, Zzt=4.0Ω, 1.5W	DO-214AA	1d	1w	Mco
918B	-	Z3SMB5918B	Zener diode	4.84..5.36V, Izt=73.5mA, 3W	DO-214AA	1d	1a	Ttr
919	-	1PMT5919B	Zener diode	5.6V±5%, Izt=267mA, 2.5W	DO-216AA	4d	1a	Msc
919A	-	1SMA5919	Zener diode	5.6V±10%, Zzt=2Ω, Izm<268mA, 1.5W	DO-214AC	1d	1a	Pjt
919A	-	1SMB5919A	Zener diode	5.6V±10%, Izt=66.9mA, Zzt=2Ω, 3W	DO-214AA	1d	1a	Eic
919A	-	Z1.5SMA5919B	Zener diode	5.32..5.88V, Izt=66.9mA, 1.5W	DO-214AC	1d	1a	Ttr
919B	-	1PMT5919B	Zener diode	5.6V±5%, Izt=267mA, 2.5W	DO-216AA	4d	1g	Mot
919B	-	1SMB5919B	Zener diode	5.6V±5%, Izt=66.9mA, Zzt=2Ω, 3W	403A-03	3d	1s	Ons
919B	-	SMBJ5919B	Zener diode	5.6V±5%, Izt=66.9mA, Zzt=2.0Ω, 1.5W	DO-214AA	1d	1w	Mco
919B	-	Z3SMB5919B	Zener diode	5.32..5.88V, Izt=66.9mA, 3W	DO-214AA	1d	1a	Ttr
91A	-	1.5SMC91A	TVS	Vrwm=77.8V, Vbr=86.5..95.5V, Ipp=12A, 1500W(1ms)	DO-214AB	1d	2s	Lif
91A	-	1.5SMC91A	TVS	Vrwm=77.8V, Vbr=86.5..95.5V, Ipp=12A, 1500W(1ms)	DO-214AB	1d	1k	Vs
91A	-	1.5SMC91A	TVS	Vrwm=77.8V, Vbr=86.5..95.5V, Ipp=12A, 1500W(1ms)	DO-214AB	1d	1b	Mde
91A	-	1.5SMC91A	TVS	Vrwm=77.8V, Vbr=86.5..95.5V, Ipp=12A, 1500W(1ms)	403	3d	2t	Ons
91A	-	P4SMA91A	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
91A	-	P4SMA91A	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 400W(1ms)	DO-214AC	1d	1k	Vs
91A	-	P6SMB91A	TVS	Vrwm=91V, Vbr=86.5..95.5V, 4.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
91A	-	P6SMB91A	TVS	Vrwm=91V, Vbr=86.5..95.5V, 4.8A, 600W(1ms)	403A	3d	1s	Ons
91A	-	P6SMBJ91A	TVS	Vrwm=91V, Vbr=81.9..100V, 4.8A, 600W(1ms)	DO-214AA	1d	1n	Lif
91A	-	SMAJP4KE91A	TVS	Vrwm=77.80V, Vbr=86.50..95.50V, Ipp=3.3A, 400W(1ms)	DO-214AC	1d	1a	Mco
91A	-	SMBJP6KE91A	TVS	Vrwm=77.80V, Vbr=86.50..95.50V, Ipp=4.9A, 600W(1ms)	DO-214AA	1d	1a	Mco
91A	-	SMCJ1.5KE91A	TVS	Vrwm=77.80V, Vbr=86.50..95.50V, Ipp=12.2A, 1500W(1ms)	DO-214AB	1d	1a	Mco
91A	-	SZP6SMB91A	TVS	Vrwm=91V, Vbr=86.5..95.5V, 4.8A, 600W(1ms)	403A	3d	1s	Ons
91A	-	TVP04A910A-G	TVS	Vbr=86.45..95.55V, Vrwm=77.8V, Ipp=3.20A, 400W(1ms)	DO-214AC	1d	2o	Cmc
91A	-	TVP06B91A-G	TVS	Vrwm=77.8V, Vbr=86.45..95.55V, Ipp=4.80A, 600W(1ms)	DO-214AA	1d	2o	Cmc
91B	-	1SMB3EZ91	Zener diode	91V±5%, Zzt=125Ω, Izt=8.2mA, 3W	DO-214AA	1d	1a	Pjt
91C	-	1.5SMC91CA	TVS	Vrwm=77.8V, Vbr=86.5..95.5V, Ipp=12A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
91C	-	1.5SMC91CA	TVS	Vrwm=77.8V, Vbr=86.5..95.5V, Ipp=12A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
91C	-	1.5SMC91CA	TVS	Vrwm=77.8V, Vbr=86.5..95.5V, Ipp=12A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
91C	-	P4SMA91C	TVS	Vbr=81.9..100V, Vrwm=73.7V, 3.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
91C	-	P4SMA91CA	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
91C	-	P6SMB91CA	TVS	Vrwm=91V, Vbr=86.5..95.5V, 4.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
91C	-	P6SMBJ91C	TVS	Vrwm=91V, Vbr=81.9..100V, 4.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
91C	-	SMAJP4KE91CA	TVS	Vrwm=77.80V, Vbr=86.50..95.50V, Ipp=3.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
91C	-	SMBJP6KE91CA	TVS	Vrwm=77.80V, Vbr=86.50..95.50V, Ipp=4.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
91C	-	SMCJ1.5KE91CA	TVS	Vrwm=77.80V, Vbr=86.50..95.50V, Ipp=12.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
91C	-	TVP04A910CA-G	TVS	Vbr=86.45..95.55V, Vrwm=77.8V, Ipp=3.20A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
91C	-	TVP06B91ACA-G	TVS	Vrwm=77.8V, Vbr=86.45..95.55V, Ipp=4.80A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
91CA	-	P4SMA91CA	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
91CA	-	P6SMB91CA	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 4.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Eic
91CA	-	P6SMBJ91CA	TVS	Vrwm=91V, Vbr=81.9..100V, 4.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
92	-	EDZ4.7B	Zener diode	4.55..4.75V, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Rhm
92	-	EDZV4.7B	Zener diode	4.55..4.75V, Izt=5.0mA, Zzt=100Ω, 150mW	SOD-523	6d	2v	Rhm
92	-	FDZ4.7EV	Zener diode	4.550..4.750V, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Fis
92	-	FDZ4.7VT	Zener diode	4.550..4.750V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Fis
92	-	GDZ4V7B-V	Zener diode	4.55..4.75V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	2m	Vs
92	-	LBZT52B4V7T1G	Zener diode	4.55..4.75V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
92	-	LEDZ4.7BT1G	Zener diode	4.55..4.75V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
92	-	LUDZS4.7BT1G	Zener diode	4.55..4.75V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
92	-	UDZS4.7B	Zener diode	4.55..4.75V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Wtr
92	-	UDZS4.7B	Zener diode	4.7V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
92	-	UDZV4.7B	Zener diode	4.55..4.75V, Izt=5.0mA, Zzt=100Ω, 200mW	SOD-323	5d	2v	Rhm
92	-	VDZS4.7B	Zener diode	4.7V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
92	-	ZV932V2TA	C-diode	VHF-tuning, 12V, 8.5/10.5pF(2.5V)	SOD-523	6d	1a	Zx
920	-	1PMT5920B	Zener diode	6.2V±5%, Izt=241mA, 2.5W	DO-216AA	4d	1a	Msc
920A	-	1SMA5920	Zener diode	6.2V±10%, Zzt=2Ω, Izm<242mA, 1.5W	DO-214AC	1d	1a	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
920A	-	1SMB5920A	Zener diode	6.2V±10%, Izt=60.5mA, Zzt=2Ω, 3W	DO-214AA	1d	1a	Eic
920A	-	Z1.5SMA5920B	Zener diode	5.89..6.51V, Izt=60.5mA, 1.5W	DO-214AC	1d	1a	Ttr
920B	-	1PMT5920B	Zener diode	6.2V±5%, Izt=241mA, 2.5W	DO-216AA	4d	1g	Mot
920B	-	1SMB5920B	Zener diode	6.2V±5%, Izt=60.5mA, Zzt=2Ω, 3W	403A-03	3d	1s	Ons
920B	-	CZRA5920B-G	Zener diode	6.2V±5%, Izt=60.5mA, Zzt=2.0Ω, 1.5W	DO-214AC	1d	1a	Cmc
920B	-	SMBJ5920B	Zener diode	6.2V±5%, Izt=60.5mA, Zzt=2.0Ω, 1.5W	DO-214AA	1d	1w	Mco
920B	-	Z3SMB5920B	Zener diode	5.89..6.51V, Izt=60.5mA, 3W	DO-214AA	1d	1a	Ttr
921	-	1PMT5921B	Zener diode	6.8V±5%, Izt=220mA, 2.5W	DO-216AA	4d	1a	Msc
921A	-	1SMA5921	Zener diode	6.8V±10%, Zzt=2.5Ω, Izm<221mA, 1.5W	DO-214AC	1d	1a	Pjt
921A	-	1SMB5921A	Zener diode	6.8V±10%, Izt=55.1mA, Zzt=2.5Ω, 3W	DO-214AA	1d	1a	Eic
921A	-	Z1.5SMA5921B	Zener diode	6.46..7.14V, Izt=55.1mA, 1.5W	DO-214AC	1d	1a	Ttr
921B	-	1PMT5921B	Zener diode	6.8V±5%, Izt=220mA, 2.5W	DO-216AA	4d	1g	Mot
921B	-	1SMB5921B	Zener diode	6.8V±5%, Izt=55.1mA, Zzt=2.5Ω, 3W	403A-03	3d	1s	Ons
921B	-	CZRA5921B-G	Zener diode	6.8V±5%, Izt=55.1mA, Zzt=2.5Ω, 1.5W	DO-214AC	1d	1a	Cmc
921B	-	SMBJ5921B	Zener diode	6.8V±5%, Izt=55.1mA, Zzt=2.5Ω, 1.5W	DO-214AA	1d	1w	Mco
921B	-	Z1.5SMB5921	Zener diode	6.46..7.14V, Izt=55.1mA, Zzt=3Ω, 1.5W	DO-214AA	1d	1a	Ttr
921B	-	Z3SMB5921B	Zener diode	6.46..7.14V, Izt=55.1mA, 3W	DO-214AA	1d	1a	Ttr
922	-	1PMT5922B	Zener diode	7.5V±5%, Izt=200mA, 2.5W	DO-216AA	4d	1a	Msc
922A	-	1SMA5922	Zener diode	7.5V±10%, Zzt=3Ω, Izm<200mA, 1.5W	DO-214AC	1d	1a	Pjt
922A	-	1SMB5922A	Zener diode	7.5V±10%, Izt=50mA, Zzt=3Ω, 3W	DO-214AA	1d	1a	Eic
922A	-	Z1.5SMA5922B	Zener diode	7.13..7.88V, Izt=50.0mA, 1.5W	DO-214AC	1d	1a	Ttr
922B	-	1PMT5922B	Zener diode	7.5V±5%, Izt=200mA, 2.5W	DO-216AA	4d	1g	Mot
922B	-	1SMB5922B	Zener diode	7.5V±5%, Izt=50mA, Zzt=3Ω, 3W	403A-03	3d	1s	Ons
922B	-	CZRA5922B-G	Zener diode	7.5V±5%, Izt=50.1mA, Zzt=3.0Ω, 1.5W	DO-214AC	1d	1a	Cmc
922B	-	SMBJ5922B	Zener diode	7.5V±5%, Izt=50.0mA, Zzt=3.0Ω, 1.5W	DO-214AA	1d	1w	Mco
922B	-	Z1.5SMB5922	Zener diode	7.13..7.88V, Izt=50mA, Zzt=3Ω, 1.5W	DO-214AA	1d	1a	Ttr
922B	-	Z3SMB5922B	Zener diode	7.12..7.88V, Izt=50.0mA, 3W	DO-214AA	1d	1a	Ttr
923	-	1PMT5923B	Zener diode	8.2V±5%, Izt=182mA, 2.5W	DO-216AA	4d	1a	Msc
923A	-	1SMA5923	Zener diode	8.2V±10%, Zzt=3.5Ω, Izm<183mA, 1.5W	DO-214AC	1d	1a	Pjt
923A	-	1SMB5923A	Zener diode	8.2V±10%, Izt=45.7mA, Zzt=3.5Ω, 3W	DO-214AA	1d	1a	Eic
923A	-	Z1.5SMA5923B	Zener diode	7.79..8.61V, Izt=45.7mA, 1.5W	DO-214AC	1d	1a	Ttr
923B	-	1PMT5923B	Zener diode	8.2V±5%, Izt=182mA, 2.5W	DO-216AA	4d	1g	Mot
923B	-	1SMB5923B	Zener diode	8.2V±5%, Izt=45.7mA, Zzt=3.5Ω, 3W	403A-03	3d	1s	Ons
923B	-	CZRA5923B-G	Zener diode	8.2V±5%, Izt=45.7mA, Zzt=3.5Ω, 1.5W	DO-214AC	1d	1a	Cmc
923B	-	SMBJ5923B	Zener diode	8.2V±5%, Izt=45.7mA, Zzt=3.5Ω, 1.5W	DO-214AA	1d	1w	Mco
923B	-	Z1.5SMB5923	Zener diode	7.79..8.61V, Izt=45.7mA, Zzt=4Ω, 1.5W	DO-214AA	1d	1a	Ttr
923B	-	Z3SMB5923B	Zener diode	7.79..8.61V, Izt=45.7mA, 3W	DO-214AA	1d	1a	Ttr
924	-	1PMT5924B	Zener diode	9.1V±5%, Izt=164mA, 2.5W	DO-216AA	4d	1a	Msc
924A	-	1SMA5924	Zener diode	9.1V±10%, Zzt=4Ω, Izm<165mA, 1.5W	DO-214AC	1d	1a	Pjt
924A	-	1SMB5924A	Zener diode	9.1V±10%, Izt=41.2mA, Zzt=4Ω, 3W	DO-214AA	1d	1a	Eic
924A	-	Z1.5SMA5924B	Zener diode	8.65..9.56V, Izt=41.2mA, 1.5W	DO-214AC	1d	1a	Ttr
924B	-	1PMT5924B	Zener diode	9.1V±5%, Izt=164mA, 2.5W	DO-216AA	4d	1g	Mot
924B	-	1SMB5924B	Zener diode	9.1V±5%, Izt=41.2mA, Zzt=4Ω, 3W	403A-03	3d	1s	Ons
924B	-	CZRA5924B-G	Zener diode	9.1V±5%, Izt=41.2mA, Zzt=4.0Ω, 1.5W	DO-214AC	1d	1a	Cmc
924B	-	SMBJ5924B	Zener diode	9.1V±5%, Izt=41.2mA, Zzt=4.0Ω, 1.5W	DO-214AA	1d	1w	Mco
924B	-	Z1.5SMB5924	Zener diode	8.65..9.56V, Izt=41.2mA, Zzt=4Ω, 1.5W	DO-214AA	1d	1a	Ttr
924B	-	Z3SMB5924B	Zener diode	8.64..9.56V, Izt=41.2mA, 3W	DO-214AA	1d	1a	Ttr
925	-	1PMT5925B	Zener diode	10V±5%, Izt=150mA, 2.5W	DO-216AA	4d	1a	Msc
925A	-	1SMA5925	Zener diode	10V±10%, Zzt=4.5Ω, Izm<150mA, 1.5W	DO-214AC	1d	1a	Pjt
925A	-	1SMB5925A	Zener diode	10V±10%, Izt=37.5mA, Zzt=4.5Ω, 3W	DO-214AA	1d	1a	Eic
925A	-	Z1.5SMA5925B	Zener diode	9.50..10.50V, Izt=37.5mA, 1.5W	DO-214AC	1d	1a	Ttr
925B	-	1PMT5925B	Zener diode	10V±5%, Izt=150mA, 2.5W	DO-216AA	4d	1g	Mot
925B	-	1SMB5925B	Zener diode	10V±5%, Izt=37.5mA, Zzt=4.5Ω, 3W	403A-03	3d	1s	Ons
925B	-	CZRA5925B-G	Zener diode	10V±5%, Izt=37.5mA, Zzt=4.5Ω, 1.5W	DO-214AC	1d	1a	Cmc
925B	-	SMBJ5925B	Zener diode	10V±5%, Izt=37.5mA, Zzt=4.5Ω, 1.5W	DO-214AA	1d	1w	Mco
925B	-	Z1.5SMB5925	Zener diode	9.50..10.50V, Izt=37.5mA, Zzt=4Ω, 1.5W	DO-214AA	1d	1a	Ttr
925B	-	Z3SMB5925B	Zener diode	9.50..10.5V, Izt=37.5mA, 3W	DO-214AA	1d	1a	Ttr
926	-	1PMT5926B	Zener diode	11V±5%, Izt=136mA, 2.5W	DO-216AA	4d	1a	Msc
926A	-	1SMA5926	Zener diode	11V±10%, Zzt=5.5Ω, Izm<136mA, 1.5W	DO-214AC	1d	1a	Pjt
926A	-	1SMB5926A	Zener diode	11V±10%, Izt=34.1mA, Zzt=5.5Ω, 3W	DO-214AA	1d	1a	Eic
926A	-	Z1.5SMA5926B	Zener diode	10.45..11.55V, Izt=34.1mA, 1.5W	DO-214AC	1d	1a	Ttr
926B	-	1PMT5926B	Zener diode	11V±5%, Izt=136mA, 2.5W	DO-216AA	4d	1g	Mot
926B	-	1SMB5926	Zener diode	11V±5%, Izt=34.1mA, Zzt=5.5Ω, 1.5W	DO-214AA	1d	1a	Pjt
926B	-	1SMB5926B	Zener diode	11V±5%, Izt=34.1mA, Zzt=5.5Ω, 3W	403A-03	3d	1s	Ons
926B	-	CZRA5926B-G	Zener diode	11V±5%, Izt=34.1mA, Zzt=5.5Ω, 1.5W	DO-214AC	1d	1a	Cmc
926B	-	SMBJ5926B	Zener diode	11V±5%, Izt=34.1mA, Zzt=5.5Ω, 1.5W	DO-214AA	1d	1w	Mco
926B	-	Z1.5SMB5926	Zener diode	10.45..11.55V, Izt=34.1mA, Zzt=6Ω, 1.5W	DO-214AA	1d	1a	Ttr
926B	-	Z3SMB5926B	Zener diode	10.45..11.55V, Izt=34.1mA, 3W	DO-214AA	1d	1a	Ttr
927	-	1PMT5927B	Zener diode	12V±5%, Izt=125mA, 2.5W	DO-216AA	4d	1g	Msc
927A	-	1SMA5927	Zener diode	12V±10%, Zzt=6.5Ω, Izm<125mA, 1.5W	DO-214AC	1d	1a	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
927A	-	1SMB5927A	Zener diode	12V±10%, Izt=31.2mA, Zzt=6.5Ω, 3W	DO-214AA	1d	1a	Eic
927A	-	Z1.5SMA5927B	Zener diode	11.40..12.60V, Izt=31.2mA, 1.5W	DO-214AC	1d	1a	Ttr
927B	-	1PMT5927B	Zener diode	12V±5%, Izt=125mA, 2.5W	DO-216AA	4d	1g	Mot
927B	-	1SMB5927	Zener diode	12V±5%, Izt=31.2mA, Zzt=6.5Ω, 1.5W	DO-214AA	1d	1a	Pjt
927B	-	1SMB5927B	Zener diode	12V±5%, Izt=31.2mA, Zzt=6.5Ω, 3W	403A-03	3d	1s	Ons
927B	-	CZRA5927B-G	Zener diode	12V±5%, Izt=31.2mA, Zzt=6.5Ω, 1.5W	DO-214AC	1d	1a	Cmc
927B	-	SMBJ5927B	Zener diode	12V±5%, Izt=31.2mA, Zzt=6.5Ω, 1.5W	DO-214AA	1d	1w	Mco
927B	-	Z1.5SMB5927	Zener diode	11.40..12.60V, Izt=31.2mA, Zzt=7Ω, 1.5W	DO-214AA	1d	1a	Ttr
927B	-	Z3SMB5927B	Zener diode	11.40..12.6V, Izt=31.2mA, 3W	DO-214AA	1d	1a	Ttr
928	-	1PMT5928B	Zener diode	13V±5%, Izt=115mA, 2.5W	DO-216AA	4d	1a	Msc
928A	-	1SMA5928	Zener diode	13V±10%, Zzt=7Ω, Izm<115mA, 1.5W	DO-214AC	1d	1a	Pjt
928A	-	1SMB5928A	Zener diode	13V±10%, Izt=28.8mA, Zzt=7Ω, 3W	DO-214AA	1d	1a	Eic
928A	-	Z1.5SMA5928B	Zener diode	12.35..13.65V, Izt=28.8mA, 1.5W	DO-214AC	1d	1a	Ttr
928B	-	1PMT5928B	Zener diode	13V±5%, Izt=115mA, 2.5W	DO-216AA	4d	1g	Mot
928B	-	1SMB5928	Zener diode	13V±5%, Izt=28.8mA, Zzt=7Ω, 1.5W	DO-214AA	1d	1a	Pjt
928B	-	1SMB5928B	Zener diode	13V±5%, Izt=28.8mA, Zzt=7Ω, 3W	403A-03	3d	1s	Ons
928B	-	CZRA5928B-G	Zener diode	13V±5%, Izt=28.8mA, Zzt=7.0Ω, 1.5W	DO-214AC	1d	1a	Cmc
928B	-	SMBJ5928B	Zener diode	13V±5%, Izt=28.8mA, Zzt=7.0Ω, 1.5W	DO-214AA	1d	1w	Mco
928B	-	Z1.5SMB5928	Zener diode	12.35..13.65V, Izt=28.8mA, Zzt=7Ω, 1.5W	DO-214AA	1d	1a	Ttr
928B	-	Z3SMB5928B	Zener diode	12.35..13.65V, Izt=28.8mA, 3W	DO-214AA	1d	1a	Ttr
929	-	1PMT5929B	Zener diode	15V±5%, Izt=100mA, 2.5W	DO-216AA	4d	1a	Msc
929A	-	1SMA5929	Zener diode	15V±10%, Zzt=9Ω, Izm<100mA, 1.5W	DO-214AC	1d	1a	Pjt
929A	-	1SMB5929A	Zener diode	15V±10%, Izt=25mA, Zzt=9Ω, 3W	DO-214AA	1d	1a	Eic
929A	-	Z1.5SMA5929B	Zener diode	14.25..15.75V, Izt=25.0mA, 1.5W	DO-214AC	1d	1a	Ttr
929B	-	1PMT5929B	Zener diode	15V±5%, Izt=100mA, 2.5W	DO-216AA	4d	1g	Mot
929B	-	1SMB5929	Zener diode	15V±5%, Izt=25mA, Zzt=9Ω, 1.5W	DO-214AA	1d	1a	Pjt
929B	-	1SMB5929B	Zener diode	15V±5%, Izt=25mA, Zzt=9Ω, 3W	403A-03	3d	1s	Ons
929B	-	CZRA5929B-G	Zener diode	15V±5%, Izt=25.0mA, Zzt=9.0Ω, 1.5W	DO-214AC	1d	1a	Cmc
929B	-	SMBJ5929B	Zener diode	15V±5%, Izt=25.0mA, Zzt=9.0Ω, 1.5W	DO-214AA	1d	1w	Mco
929B	-	Z1.5SMB5929	Zener diode	14.25..15.75V, Izt=25mA, Zzt=9Ω, 1.5W	DO-214AA	1d	1a	Ttr
929B	-	Z3SMB5929B	Zener diode	14.25..15.75V, Izt=25.0mA, 3W	DO-214AA	1d	1a	Ttr
93	-	ZV933V2TA	C-diode	VHF-tuning, 12V, 18/27pF(2.5V)	SOD-523	6d	1a	Zx
930	-	1PMT5930B	Zener diode	16V±5%, Izt=93mA, 2.5W	DO-216AA	4d	1a	Msc
930A	-	1SMA5930	Zener diode	16V±10%, Zzt=10Ω, Izm<94mA, 1.5W	DO-214AC	1d	1a	Pjt
930A	-	1SMB5930A	Zener diode	16V±10%, Izt=23.4mA, Zzt=10Ω, 3W	DO-214AA	1d	1a	Eic
930A	-	Z1.5SMA5930B	Zener diode	15.20..16.80V, Izt=23.4mA, 1.5W	DO-214AC	1d	1a	Ttr
930B	-	1PMT5930B	Zener diode	16V±5%, Izt=93mA, 2.5W	DO-216AA	4d	1g	Mot
930B	-	1SMB5930	Zener diode	16V±5%, Izt=23.4mA, Zzt=10Ω, 1.5W	DO-214AA	1d	1a	Pjt
930B	-	1SMB5930B	Zener diode	16V±5%, Izt=23.4mA, Zzt=10Ω, 3W	403A-03	3d	1s	Ons
930B	-	CZRA5930B-G	Zener diode	16V±5%, Izt=23.4mA, Zzt=10Ω, 1.5W	DO-214AC	1d	1a	Cmc
930B	-	SMBJ5930B	Zener diode	16V±5%, Izt=23.4mA, Zzt=10.0Ω, 1.5W	DO-214AA	1d	1w	Mco
930B	-	Z1.5SMB5930	Zener diode	15.20..16.80V, Izt=23.4mA, Zzt=10Ω, 1.5W	DO-214AA	1d	1a	Ttr
930B	-	Z3SMB5930B	Zener diode	15.20..16.8V, Izt=23.4mA, 3W	DO-214AA	1d	1a	Ttr
931	-	1PMT5931B	Zener diode	18V±5%, Izt=83mA, 2.5W	DO-216AA	4d	1a	Msc
931A	-	1SMA5931	Zener diode	18V±10%, Zzt=12Ω, Izm<83mA, 1.5W	DO-214AC	1d	1a	Pjt
931A	-	1SMB5931A	Zener diode	18V±10%, Izt=20.8mA, Zzt=12Ω, 3W	DO-214AA	1d	1a	Eic
931A	-	Z1.5SMA5931B	Zener diode	17.10..18.90V, Izt=20.8mA, 1.5W	DO-214AC	1d	1a	Ttr
931B	-	1PMT5931B	Zener diode	18V±5%, Izt=83mA, 2.5W	DO-216AA	4d	1g	Mot
931B	-	1SMB5931	Zener diode	18V±5%, Izt=20.8mA, Zzt=12Ω, 1.5W	DO-214AA	1d	1a	Pjt
931B	-	1SMB5931B	Zener diode	18V±5%, Izt=20.8mA, Zzt=12Ω, 3W	403A-03	3d	1s	Ons
931B	-	CZRA5931B-G	Zener diode	18V±5%, Izt=20.8mA, Zzt=12Ω, 1.5W	DO-214AC	1d	1a	Cmc
931B	-	SMBJ5931B	Zener diode	18V±5%, Izt=20.8mA, Zzt=12.0Ω, 1.5W	DO-214AA	1d	1w	Mco
931B	-	Z1.5SMB5931	Zener diode	17.10..18.90V, Izt=20.8mA, Zzt=12Ω, 1.5W	DO-214AA	1d	1a	Ttr
931B	-	Z3SMB5931B	Zener diode	17.10..18.9V, Izt=20.8mA, 3W	DO-214AA	1d	1a	Ttr
932	-	1PMT5932B	Zener diode	20V±5%, Izt=75mA, 2.5W	DO-216AA	4d	1a	Msc
932A	-	1SMA5932	Zener diode	20V±10%, Zzt=14Ω, Izm<75mA, 1.5W	DO-214AC	1d	1a	Pjt
932A	-	1SMB5932A	Zener diode	20V±10%, Izt=18.7mA, Zzt=14Ω, 3W	DO-214AA	1d	1a	Eic
932A	-	Z1.5SMA5932B	Zener diode	19.0..21.0V, Izt=18.7mA, 1.5W	DO-214AC	1d	1a	Ttr
932B	-	1PMT5932B	Zener diode	20V±5%, Izt=75mA, 2.5W	DO-216AA	4d	1g	Mot
932B	-	1SMB5932	Zener diode	20V±5%, Izt=18.7mA, Zzt=14Ω, 1.5W	DO-214AA	1d	1a	Pjt
932B	-	1SMB5932B	Zener diode	20V±5%, Izt=18.7mA, Zzt=14Ω, 3W	403A-03	3d	1s	Ons
932B	-	CZRA5932B-G	Zener diode	20V±5%, Izt=18.7mA, Zzt=14Ω, 1.5W	DO-214AC	1d	1a	Cmc
932B	-	SMBJ5932B	Zener diode	20V±5%, Izt=18.7mA, Zzt=14.0Ω, 1.5W	DO-214AA	1d	1w	Mco
932B	-	Z1.5SMB5932	Zener diode	19.0..21.0V, Izt=18.7mA, Zzt=14Ω, 1.5W	DO-214AA	1d	1a	Ttr
932B	-	Z3SMB5932B	Zener diode	19.0..21V, Izt=18.7 14mA, 3W	DO-214AA	1d	1a	Ttr
933	-	1PMT5933B	Zener diode	22V±5%, Izt=68mA, 2.5W	DO-216AA	4d	1a	Msc
933A	-	1SMA5933	Zener diode	22V±10%, Zzt=17.5Ω, Izm<68mA, 1.5W	DO-214AC	1d	1a	Pjt
933A	-	1SMB5933A	Zener diode	22V±10%, Izt=17mA, Zzt=17.5Ω, 3W	DO-214AA	1d	1a	Eic
933A	-	Z1.5SMA5933B	Zener diode	20.90..23.10V, Izt=17.0mA, 1.5W	DO-214AC	1d	1a	Ttr
933B	-	1PMT5933B	Zener diode	22V±5%, Izt=68mA, 2.5W	DO-216AA	4d	1g	Mot



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
933B	-	1SMB5933	Zener diode	22V±5%, Izt=17mA, Zzt=17.5Ω, 1.5W	DO-214AA	1d	1a	Pjt
933B	-	1SMB5933B	Zener diode	22V±5%, Izt=17mA, Zzt=17.5Ω, 3W	403A-03	3d	1s	Ons
933B	-	CZRA5933B-G	Zener diode	22V±5%, Izt=17.0mA, Zzt=18Ω, 1.5W	DO-214AC	1d	1a	Cmc
933B	-	SMBJ5933B	Zener diode	22V±5%, Izt=17.0mA, Zzt=17.5Ω, 1.5W	DO-214AA	1d	1w	Mco
933B	-	Z1.5SMB5933	Zener diode	20.90..23.10V, Izt=17mA, Zzt=18Ω, 1.5W	DO-214AA	1d	1a	Ttr
933B	-	Z3SMB5933B	Zener diode	20.90..23.1V, Izt=17.0mA, 3W	DO-214AA	1d	1a	Ttr
934	-	1PMT5934B	Zener diode	24V±5%, Izt=62mA, 2.5W	DO-216AA	4d	1a	Msc
934A	-	1SMA5934	Zener diode	24V±10%, Zzt=19Ω, Izm<63mA, 1.5W	DO-214AC	1d	1a	Pjt
934A	-	1SMB5934A	Zener diode	24V±10%, Izt=15.6mA, Zzt=19Ω, 3W	DO-214AA	1d	1a	Eic
934A	-	Z1.5SMA5934B	Zener diode	22.80..25.20V, Izt=15.6mA, 1.5W	DO-214AC	1d	1a	Ttr
934B	-	1PMT5934B	Zener diode	24V±5%, Izt=62mA, 2.5W	DO-216AA	4d	1g	Mot
934B	-	1SMB5934	Zener diode	24V±5%, Izt=15.6mA, Zzt=19Ω, 1.5W	DO-214AA	1d	1a	Pjt
934B	-	1SMB5934B	Zener diode	24V±5%, Izt=15.6mA, Zzt=19Ω, 3W	403A-03	3d	1s	Ons
934B	-	CZRA5934B-G	Zener diode	24V±5%, Izt=15.6mA, Zzt=19Ω, 1.5W	DO-214AC	1d	1a	Cmc
934B	-	SMBJ5934B	Zener diode	24V±5%, Izt=15.6mA, Zzt=19.0Ω, 1.5W	DO-214AA	1d	1w	Mco
934B	-	Z1.5SMB5934	Zener diode	22.80..25.20V, Izt=15.6mA, Zzt=19Ω, 1.5W	DO-214AA	1d	1a	Ttr
934B	-	Z3SMB5934B	Zener diode	22.80..25.2V, Izt=15.6mA, 3W	DO-214AA	1d	1a	Ttr
935	-	1PMT5935B	Zener diode	27V±5%, Izt=55mA, 2.5W	DO-216AA	4d	1a	Msc
935A	-	1SMA5935	Zener diode	27V±10%, Zzt=23Ω, Izm<56mA, 1.5W	DO-214AC	1d	1a	Pjt
935A	-	1SMB5935A	Zener diode	27V±10%, Izt=13.9mA, Zzt=23Ω, 3W	DO-214AA	1d	1a	Eic
935A	-	Z1.5SMA5935B	Zener diode	25.65..28.35V, Izt=13.9mA, 1.5W	DO-214AC	1d	1a	Ttr
935B	-	1PMT5935B	Zener diode	27V±5%, Izt=55mA, 2.5W	DO-216AA	4d	1g	Mot
935B	-	1SMB5935	Zener diode	27V±5%, Izt=13.9mA, Zzt=23Ω, 1.5W	DO-214AA	1d	1a	Pjt
935B	-	1SMB5935B	Zener diode	27V±5%, Izt=13.9mA, Zzt=23Ω, 3W	403A-03	3d	1s	Ons
935B	-	CZRA5935B-G	Zener diode	27V±5%, Izt=13.9mA, Zzt=23Ω, 1.5W	DO-214AC	1d	1a	Cmc
935B	-	SMBJ5935B	Zener diode	27V±5%, Izt=13.9mA, Zzt=23.0Ω, 1.5W	DO-214AA	1d	1w	Mco
935B	-	Z1.5SMB5935	Zener diode	25.65..28.35V, Izt=13.9mA, Zzt=23Ω, 1.5W	DO-214AA	1d	1a	Ttr
935B	-	Z3SMB5935B	Zener diode	25.65..28.35V, Izt=13.9mA, 3W	DO-214AA	1d	1a	Ttr
936	-	1PMT5936B	Zener diode	30V±5%, Izt=50mA, 2.5W	DO-216AA	4d	1a	Msc
936A	-	1SMA5936	Zener diode	30V±10%, Zzt=26Ω, Izm<50mA, 1.5W	DO-214AC	1d	1a	Pjt
936A	-	1SMB5936A	Zener diode	30V±10%, Izt=12.5mA, Zzt=26Ω, 3W	DO-214AA	1d	1a	Eic
936A	-	Z1.5SMA5936B	Zener diode	28.50..31.50V, Izt=12.5mA, 1.5W	DO-214AC	1d	1a	Ttr
936B	-	1PMT5936B	Zener diode	30V±5%, Izt=50mA, 2.5W	DO-216AA	4d	1g	Mot
936B	-	1SMB5936	Zener diode	30V±5%, Izt=12.5mA, Zzt=26Ω, 1.5W	DO-214AA	1d	1a	Pjt
936B	-	1SMB5936B	Zener diode	30V±5%, Izt=12.5mA, Zzt=26Ω, 3W	403A-03	3d	1s	Ons
936B	-	CZRA5936B-G	Zener diode	30V±5%, Izt=12.5mA, Zzt=26Ω, 1.5W	DO-214AC	1d	1a	Cmc
936B	-	SMBJ5936B	Zener diode	30V±5%, Izt=12.5mA, Zzt=28.0Ω, 1.5W	DO-214AA	1d	1w	Mco
936B	-	Z1.5SMB5936	Zener diode	28.50..31.50V, Izt=12.5mA, Zzt=26Ω, 1.5W	DO-214AA	1d	1a	Ttr
936B	-	Z3SMB5936B	Zener diode	28.50..31.5V, Izt=12.5mA, 3W	DO-214AA	1d	1a	Ttr
937	-	1PMT5937B	Zener diode	33V±5%, Izt=45mA, 2.5W	DO-216AA	4d	1a	Msc
937A	-	1SMA5937	Zener diode	33V±10%, Zzt=33Ω, Izm<45mA, 1.5W	DO-214AC	1d	1a	Pjt
937A	-	1SMB5937A	Zener diode	33V±10%, Izt=11.4mA, Zzt=33Ω, 3W	DO-214AA	1d	1a	Eic
937A	-	Z1.5SMA5937B	Zener diode	31.35..34.65V, Izt=11.4mA, 1.5W	DO-214AC	1d	1a	Ttr
937B	-	1PMT5937B	Zener diode	33V±5%, Izt=45mA, 2.5W	DO-216AA	4d	1g	Mot
937B	-	1SMB5937	Zener diode	33V±5%, Izt=11.4mA, Zzt=33Ω, 1.5W	DO-214AA	1d	1a	Pjt
937B	-	1SMB5937B	Zener diode	33V±5%, Izt=11.4mA, Zzt=33Ω, 3W	403A-03	3d	1s	Ons
937B	-	CZRA5937B-G	Zener diode	33V±5%, Izt=11.4mA, Zzt=33Ω, 1.5W	DO-214AC	1d	1a	Cmc
937B	-	SMBJ5937B	Zener diode	33V±5%, Izt=11.4mA, Zzt=33.0Ω, 1.5W	DO-214AA	1d	1w	Mco
937B	-	Z1.5SMB5937	Zener diode	31.35..34.65V, Izt=11.4mA, Zzt=33Ω, 1.5W	DO-214AA	1d	1a	Ttr
937B	-	Z3SMB5937B	Zener diode	31.35..34.65V, Izt=11.4mA, 3W	DO-214AA	1d	1a	Ttr
938	-	1PMT5938B	Zener diode	36V±5%, Izt=41mA, 2.5W	DO-216AA	4d	1a	Msc
938A	-	1SMA5938	Zener diode	36V±10%, Zzt=38Ω, Izm<42mA, 1.5W	DO-214AC	1d	1a	Pjt
938A	-	1SMB5938A	Zener diode	36V±10%, Izt=10.4mA, Zzt=38Ω, 3W	DO-214AA	1d	1a	Eic
938A	-	Z1.5SMA5938B	Zener diode	34.20..37.80V, Izt=10.4mA, 1.5W	DO-214AC	1d	1a	Ttr
938B	-	1PMT5938B	Zener diode	36V±5%, Izt=41mA, 2.5W	DO-216AA	4d	1g	Mot
938B	-	1SMB5938	Zener diode	36V±5%, Izt=10.4mA, Zzt=38Ω, 1.5W	DO-214AA	1d	1a	Pjt
938B	-	1SMB5938B	Zener diode	36V±5%, Izt=10.4mA, Zzt=38Ω, 3W	403A-03	3d	1s	Ons
938B	-	CZRA5938B-G	Zener diode	36V±5%, Izt=10.4mA, Zzt=38Ω, 1.5W	DO-214AC	1d	1a	Cmc
938B	-	SMBJ5938B	Zener diode	36V±5%, Izt=10.4mA, Zzt=38.0Ω, 1.5W	DO-214AA	1d	1w	Mco
938B	-	Z1.5SMB5938	Zener diode	34.20..37.80V, Izt=10.4mA, Zzt=38Ω, 1.5W	DO-214AA	1d	1a	Ttr
938B	-	Z3SMB5938B	Zener diode	34.20..37.8V, Izt=10.4mA, 3W	DO-214AA	1d	1a	Ttr
939	-	1PMT5939B	Zener diode	39V±5%, Izt=38mA, 2.5W	DO-216AA	4d	1a	Msc
939A	-	1SMA5939	Zener diode	39V±10%, Zzt=45Ω, Izm<38mA, 1.5W	DO-214AC	1d	1a	Pjt
939A	-	1SMB5939A	Zener diode	39V±10%, Izt=9.6mA, Zzt=45Ω, 3W	DO-214AA	1d	1a	Eic
939A	-	Z1.5SMA5939B	Zener diode	37.05..40.95V, Izt=9.6mA, 1.5W	DO-214AC	1d	1a	Ttr
939B	-	1PMT5939B	Zener diode	39V±5%, Izt=38mA, 2.5W	DO-216AA	4d	1g	Mot
939B	-	1SMB5939	Zener diode	39V±5%, Izt=9.6mA, Zzt=45Ω, 1.5W	DO-214AA	1d	1a	Pjt
939B	-	1SMB5939B	Zener diode	39V±5%, Izt=9.6mA, Zzt=45Ω, 3W	403A-03	3d	1s	Ons
939B	-	CZRA5939B-G	Zener diode	39V±5%, Izt=9.6mA, Zzt=45Ω, 1.5W	DO-214AC	1d	1a	Cmc
939B	-	SMBJ5939B	Zener diode	39V±5%, Izt=9.6mA, Zzt=45.0Ω, 1.5W	DO-214AA	1d	1w	Mco

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
939B	-	Z1.5SMB5939	Zener diode	37.05..40.95V, Izt=9.6mA, Zzt=45Ω, 1.5W	DO-214AA	1d	1a	Ttr
939B	-	Z3SMB5939B	Zener diode	37.05..40.95V, Izt=9.6mA, 3W	DO-214AA	1d	1a	Ttr
940	-	1PMT5940B	Zener diode	43V±5%, Izt=34mA, 2.5W	DO-216AA	4d	1a	Msc
940A	-	1SMA5940	Zener diode	43V±10%, Zzt=53Ω, Izm<35mA, 1.5W	DO-214AC	1d	1a	Pjt
940A	-	1SMB5940A	Zener diode	43V±10%, Izt=8.7mA, Zzt=53Ω, 3W	DO-214AA	1d	1a	Eic
940A	-	Z1.5SMA5940B	Zener diode	40.85..45.15V, Izt=8.7mA, 1.5W	DO-214AC	1d	1a	Ttr
940B	-	1PMT5940B	Zener diode	43V±5%, Izt=34mA, 2.5W	DO-216AA	4d	1g	Mot
940B	-	1SMB5940	Zener diode	43V±5%, Izt=8.7mA, Zzt=53Ω, 1.5W	DO-214AA	1d	1a	Pjt
940B	-	1SMB5940B	Zener diode	43V±5%, Izt=8.7mA, Zzt=53Ω, 3W	403A-03	3d	1s	Ons
940B	-	CZRA5940B-G	Zener diode	43V±5%, Izt=8.7mA, Zzt=53Ω, 1.5W	DO-214AC	1d	1a	Cmc
940B	-	SMBJ5940B	Zener diode	43V±5%, Izt=8.7mA, Zzt=53.0Ω, 1.5W	DO-214AA	1d	1w	Mco
940B	-	Z1.5SMB5940	Zener diode	40.85..45.15V, Izt=8.7mA, Zzt=52Ω, 1.5W	DO-214AA	1d	1a	Ttr
940B	-	Z3SMB5940B	Zener diode	40.85..45.15V, Izt=8.7mA, 3W	DO-214AA	1d	1a	Ttr
941	-	1PMT5941B	Zener diode	47V±5%, Izt=31mA, 2.5W	DO-216AA	4d	1a	Msc
941A	-	1SMA5941	Zener diode	47V±10%, Zzt=67Ω, Izm<32mA, 1.5W	DO-214AC	1d	1a	Pjt
941A	-	1SMB5941A	Zener diode	47V±10%, Izt=8mA, Zzt=67Ω, 3W	DO-214AA	1d	1a	Eic
941A	-	Z1.5SMA5941B	Zener diode	44.65..49.35V, Izt=8.0mA, 1.5W	DO-214AC	1d	1a	Ttr
941B	-	1PMT5941B	Zener diode	47V±5%, Izt=31mA, 2.5W	DO-216AA	4d	1g	Mot
941B	-	1SMB5941	Zener diode	47V±5%, Izt=8mA, Zzt=67Ω, 1.5W	DO-214AA	1d	1a	Pjt
941B	-	1SMB5941B	Zener diode	47V±5%, Izt=8mA, Zzt=67Ω, 3W	403A-03	3d	1s	Ons
941B	-	CZRA5941B-G	Zener diode	47V±5%, Izt=8.0mA, Zzt=67Ω, 1.5W	DO-214AC	1d	1a	Cmc
941B	-	SMBJ5941B	Zener diode	47V±5%, Izt=8.0mA, Zzt=67.0Ω, 1.5W	DO-214AA	1d	1w	Mco
941B	-	Z1.5SMB5941	Zener diode	44.65..49.35V, Izt=8mA, Zzt=67Ω, 1.5W	DO-214AA	1d	1a	Ttr
941B	-	Z3SMB5941B	Zener diode	44.65..49.35V, Izt=8.0mA, 3W	DO-214AA	1d	1a	Ttr
942	-	1PMT5942B	Zener diode	51V±5%, Izt=29mA, 2.5W	DO-216AA	4d	1a	Msc
942A	-	1SMA5942	Zener diode	51V±10%, Zzt=70Ω, Izm<29mA, 1.5W	DO-214AC	1d	1a	Pjt
942A	-	1SMB5942A	Zener diode	51V±10%, Izt=7.3mA, Zzt=70Ω, 3W	DO-214AA	1d	1a	Eic
942A	-	Z1.5SMA5942B	Zener diode	48.45..53.55V, Izt=7.3mA, 1.5W	DO-214AC	1d	1a	Ttr
942B	-	1PMT5942B	Zener diode	51V±5%, Izt=29mA, 2.5W	DO-216AA	4d	1g	Mot
942B	-	1SMB5942	Zener diode	51V±5%, Izt=7.3mA, Zzt=70Ω, 1.5W	DO-214AA	1d	1a	Pjt
942B	-	1SMB5942B	Zener diode	51V±5%, Izt=7.3mA, Zzt=70Ω, 3W	403A-03	3d	1s	Ons
942B	-	CZRA5942B-G	Zener diode	51V±5%, Izt=7.3mA, Zzt=70Ω, 1.5W	DO-214AC	1d	1a	Cmc
942B	-	SMBJ5942B	Zener diode	51V±5%, Izt=7.3mA, Zzt=70.0Ω, 1.5W	DO-214AA	1d	1w	Mco
942B	-	Z1.5SMB5942	Zener diode	48.45..53.55V, Izt=7.3mA, Zzt=70Ω, 1.5W	DO-214AA	1d	1a	Ttr
942B	-	Z3SMB5942B	Zener diode	48.45..53.55V, Izt=7.3mA, 3W	DO-214AA	1d	1a	Ttr
943	-	1PMT5943B	Zener diode	56V±5%, Izt=26mA, 2.5W	DO-216AA	4d	1a	Msc
943A	-	1SMA5943	Zener diode	56V±10%, Zzt=86Ω, Izm<27mA, 1.5W	DO-214AC	1d	1a	Pjt
943A	-	1SMB5943A	Zener diode	56V±10%, Izt=6.7mA, Zzt=86Ω, 3W	DO-214AA	1d	1a	Eic
943A	-	Z1.5SMA5943B	Zener diode	53.2..58.80V, Izt=6.7mA, 1.5W	DO-214AC	1d	1a	Ttr
943B	-	1PMT5943B	Zener diode	56V±5%, Izt=26mA, 2.5W	DO-216AA	4d	1g	Mot
943B	-	1SMB5943	Zener diode	56V±5%, Izt=6.7mA, Zzt=86Ω, 1.5W	DO-214AA	1d	1a	Pjt
943B	-	1SMB5943B	Zener diode	56V±5%, Izt=6.7mA, Zzt=86Ω, 3W	403A-03	3d	1s	Ons
943B	-	CZRA5943B-G	Zener diode	56V±5%, Izt=6.7mA, Zzt=86Ω, 1.5W	DO-214AC	1d	1a	Cmc
943B	-	SMBJ5943B	Zener diode	56V±5%, Izt=6.7mA, Zzt=86.0Ω, 1.5W	DO-214AA	1d	1w	Mco
943B	-	Z3SMB5943B	Zener diode	53.2..58.8 6V, Izt=7mA, 3W	DO-214AA	1d	1a	Ttr
944	-	1PMT5944B	Zener diode	62V±5%, Izt=24mA, 2.5W	DO-216AA	4d	1a	Msc
944A	-	1SMA5944	Zener diode	62V±10%, Zzt=100Ω, Izm<24mA, 1.5W	DO-214AC	1d	1a	Pjt
944A	-	1SMB5944A	Zener diode	62V±10%, Izt=6mA, Zzt=100Ω, 3W	DO-214AA	1d	1a	Eic
944A	-	Z1.5SMA5944B	Zener diode	58.9..65.10V, Izt=6.0mA, 1.5W	DO-214AC	1d	1a	Ttr
944B	-	1PMT5944B	Zener diode	62V±5%, Izt=24mA, 2.5W	DO-216AA	4d	1g	Mot
944B	-	1SMB5944	Zener diode	62V±5%, Izt=6mA, Zzt=100Ω, 1.5W	DO-214AA	1d	1a	Pjt
944B	-	1SMB5944B	Zener diode	62V±5%, Izt=6mA, Zzt=100Ω, 3W	403A-03	3d	1s	Ons
944B	-	CZRA5944B-G	Zener diode	62V±5%, Izt=6.0mA, Zzt=100Ω, 1.5W	DO-214AC	1d	1a	Cmc
944B	-	SMBJ5944B	Zener diode	62V±5%, Izt=6.0mA, Zzt=100Ω, 1.5W	DO-214AA	1d	1w	Mco
944B	-	Z3SMB5944B	Zener diode	58.9..65.1V, Izt=6.0mA, 3W	DO-214AA	1d	1a	Ttr
945	-	1PMT5945B	Zener diode	68V±5%, Izt=22mA, 2.5W	DO-216AA	4d	1a	Msc
945A	-	1SMA5945	Zener diode	68V±10%, Zzt=120Ω, Izm<22mA, 1.5W	DO-214AC	1d	1a	Pjt
945A	-	1SMB5945A	Zener diode	68V±10%, Izt=5.5mA, Zzt=120Ω, 3W	DO-214AA	1d	1a	Eic
945A	-	Z1.5SMA5945B	Zener diode	64.6..71.40V, Izt=5.5mA, 1.5W	DO-214AC	1d	1a	Ttr
945B	-	1PMT5945B	Zener diode	68V±5%, Izt=22mA, 2.5W	DO-216AA	4d	1g	Mot
945B	-	1SMB5945	Zener diode	68V±5%, Izt=5.5mA, Zzt=120Ω, 1.5W	DO-214AA	1d	1a	Pjt
945B	-	1SMB5945B	Zener diode	68V±5%, Izt=5.5mA, Zzt=120Ω, 3W	403A-03	3d	1s	Ons
945B	-	CZRA5945B-G	Zener diode	68V±5%, Izt=5.5mA, Zzt=120Ω, 1.5W	DO-214AC	1d	1a	Cmc
945B	-	SMBJ5945B	Zener diode	68V±5%, Izt=5.5mA, Zzt=120Ω, 1.5W	DO-214AA	1d	1w	Mco
945B	-	Z3SMB5945B	Zener diode	64.6..71.4V, Izt=5.5mA, 3W	DO-214AA	1d	1a	Ttr
946	-	1PMT5946B	Zener diode	75V±5%, Izt=20mA, 2.5W	DO-216AA	4d	1a	Msc
946A	-	1SMA5946	Zener diode	75V±10%, Zzt=140Ω, Izm<20mA, 1.5W	DO-214AC	1d	1a	Pjt
946A	-	1SMB5946A	Zener diode	75V±10%, Izt=5mA, Zzt=140Ω, 3W	DO-214AA	1d	1a	Eic
946A	-	Z1.5SMA5946B	Zener diode	71.25..78.75V, Izt=5.0mA, 1.5W	DO-214AC	1d	1a	Ttr
946B	-	1PMT5946B	Zener diode	75V±5%, Izt=20mA, 2.5W	DO-216AA	4d	1g	Mot

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
946B	-	1SMB5946	Zener diode	75V±5%, Izt=5mA, Zzt=140Ω, 1.5W	DO-214AA	1d	1a	Pjt
946B	-	1SMB5946B	Zener diode	75V±5%, Izt=5mA, Zzt=140Ω, 3W	403A-03	3d	1s	Ons
946B	-	CZRA5946B-G	Zener diode	75V±5%, Izt=5mA, Zzt=140Ω, 1.5W	DO-214AC	1d	1a	Cmc
946B	-	SMBJ5946B	Zener diode	75V±5%, Izt=5.0mA, Zzt=140Ω, 1.5W	DO-214AA	1d	1w	Mco
946B	-	Z3SMB5946B	Zener diode	71.25..78.75V, Izt=5.0mA, 3W	DO-214AA	1d	1a	Ttr
947	-	1PMT5947B	Zener diode	82V±5%, Izt=18mA, 2.5W	DO-216AA	4d	1a	Msc
947A	-	1SMA5947	Zener diode	82V±10%, Zzt=160Ω, Izm<18mA, 1.5W	DO-214AC	1d	1a	Pjt
947A	-	1SMB5947A	Zener diode	82V±10%, Izt=4.6mA, Zzt=160Ω, 3W	DO-214AA	1d	1a	Eic
947A	-	Z1.5SMA5947B	Zener diode	77.90..86.10V, Izt=4.6mA, 1.5W	DO-214AC	1d	1a	Ttr
947B	-	1PMT5947B	Zener diode	82V±5%, Izt=18mA, 2.5W	DO-216AA	4d	1g	Mot
947B	-	1SMB5947	Zener diode	82V±5%, Izt=4.6mA, Zzt=160Ω, 1.5W	DO-214AA	1d	1a	Pjt
947B	-	1SMB5947B	Zener diode	82V±5%, Izt=4.6mA, Zzt=160Ω, 3W	403A-03	3d	1s	Ons
947B	-	CZRA5947B-G	Zener diode	82V±5%, Izt=4.6mA, Zzt=160Ω, 1.5W	DO-214AC	1d	1a	Cmc
947B	-	SMBJ5947B	Zener diode	82V±5%, Izt=4.6mA, Zzt=160Ω, 1.5W	DO-214AA	1d	1w	Mco
947B	-	Z3SMB5947B	Zener diode	77.9..86.1V, Izt=4.6mA, 3W	DO-214AA	1d	1a	Ttr
948	-	1PMT5948B	Zener diode	91V±5%, Izt=16mA, 2.5W	DO-216AA	4d	1a	Msc
948A	-	1SMA5948	Zener diode	91V±10%, Zzt=200Ω, Izm<16mA, 1.5W	DO-214AC	1d	1a	Pjt
948A	-	1SMB5948A	Zener diode	91V±10%, Izt=4.1mA, Zzt=200Ω, 3W	DO-214AA	1d	1a	Eic
948A	-	Z1.5SMA5948B	Zener diode	86.45..95.55V, Izt=4.1mA, 1.5W	DO-214AC	1d	1a	Ttr
948B	-	1PMT5948B	Zener diode	91V±5%, Izt=16mA, 2.5W	DO-216AA	4d	1g	Mot
948B	-	1SMB5948	Zener diode	91V±5%, Izt=4.1mA, Zzt=200Ω, 1.5W	DO-214AA	1d	1a	Pjt
948B	-	1SMB5948B	Zener diode	91V±5%, Izt=4.1mA, Zzt=200Ω, 3W	403A-03	3d	1s	Ons
948B	-	CZRA5948B-G	Zener diode	91V±5%, Izt=4.1mA, Zzt=200Ω, 1.5W	DO-214AC	1d	1a	Cmc
948B	-	SMBJ5948B	Zener diode	91V±5%, Izt=4.1mA, Zzt=200Ω, 1.5W	DO-214AA	1d	1w	Mco
948B	-	Z3SMB5948B	Zener diode	86.45..95.55V, Izt=4.1mA, 3W	DO-214AA	1d	1a	Ttr
949	-	1PMT5949B	Zener diode	91V±5%, Izt=16mA, 2.5W	DO-216AA	4d	1a	Msc
949A	-	1SMA5949	Zener diode	100V±10%, Zzt=250Ω, Izm<15mA, 1.5W	DO-214AC	1d	1a	Pjt
949A	-	1SMB5949A	Zener diode	100V±10%, Izt=3.7mA, Zzt=250Ω, 3W	DO-214AA	1d	1a	Eic
949A	-	Z1.5SMA5949B	Zener diode	95.0..105.0V, Izt=3.7mA, 1.5W	DO-214AC	1d	1ab	Ttr
949B	-	1SMB5949	Zener diode	100V±5%, Izt=3.7mA, Zzt=250Ω, 1.5W	DO-214AA	1d	1a	Pjt
949B	-	1SMB5949B	Zener diode	100V±5%, Izt=3.7mA, Zzt=250Ω, 3W	403A-03	3d	1s	Ons
949B	-	CZRA5949B-G	Zener diode	100V±5%, Izt=3.7mA, Zzt=250Ω, 1.5W	DO-214AC	1d	1a	Cmc
949B	-	SMBJ5949B	Zener diode	100V±5%, Izt=3.7mA, Zzt=250Ω, 1.5W	DO-214AA	1d	1w	Mco
949B	-	Z3SMB5949B	Zener diode	95..105V, Izt=3.7mA, 3W	DO-214AA	1d	1a	Ttr
95	-	BZX584B5V6	Zener diode	5.49..5.71V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523FL	7d	1a	Tac
95	-	EDZ24B	Zener diode	23.72..24.78V, Izt=5mA, Zzt=120Ω, 150mW	SOD-523	6d	1a	Rhm
95	-	EDZV24B	Zener diode	23.72..24.78V, Izt=5.0mA, Zzt=120Ω, 150mW	SOD-523	6d	2v	Rhm
95	-	FDZ24EV	Zener diode	23.720..24.780V, Izt=5mA, Zzt=120Ω, 150mW	SOD-523	6d	1a	Fis
95	-	FDZ24VT	Zener diode	23.720..24.780V, Izt=5mA, Zzt=120Ω, 200mW	SOD-323	5d	1a	Fis
95	-	GDZ4V7B-V-G	Zener diode	4.55..4.75V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	2m	Vs
95	-	LBZT52B24T1G	Zener diode	23.72..24.78V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
95	-	LEDZ24BT1G	Zener diode	23.72..24.78V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
95	-	LUDZS24BT1G	Zener diode	23.72..24.78V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
95	-	MM5Z5V6B	Zener diode	5.49..5.71V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523FL	7d	1a	Tac
95	-	TDZ24B	Zener diode	24V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
95	-	UDZS24B	Zener diode	23.72..24.78V, Izt=5mA, Zzt=120Ω, 200mW	SOD-323	5d	1a	Wtr
95	-	UDZS24B	Zener diode	24V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
95	-	UDZV24B	Zener diode	23.72..24.78V, Izt=5.0mA, Zzt=120Ω, 200mW	SOD-323	5d	2v	Rhm
95	-	VDZS24B	Zener diode	24V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
950	-	1PMT5950B	Zener diode	91V±5%, Izt=16mA, 2.5W	DO-216AA	4d	1a	Msc
950A	-	1SMB5950A	Zener diode	110V±10%, Izt=3.4mA, Zzt=300Ω, 3W	DO-214AA	1d	1a	Eic
950B	-	1SMB5950	Zener diode	110V±5%, Izt=3.4mA, Zzt=300Ω, 1.5W	DO-214AA	1d	1a	Pjt
950B	-	1SMB5950B	Zener diode	110V±5%, Izt=3.4mA, Zzt=300Ω, 3W	403A-03	3d	1s	Ons
950B	-	CZRA5950B-G	Zener diode	110V±5%, Izt=3.4mA, Zzt=300Ω, 1.5W	DO-214AC	1d	1a	Cmc
950B	-	SMBJ5950B	Zener diode	110V±5%, Izt=3.4mA, Zzt=300Ω, 1.5W	DO-214AA	1d	1w	Mco
950B	-	Z3SMB5950B	Zener diode	104.5..115.5V, Izt=3.4mA, 3W	DO-214AA	1d	1a	Ttr
951	-	1PMT5951B	Zener diode	91V±5%, Izt=16mA, 2.5W	DO-216AA	4d	1a	Msc
951A	-	1SMB5951A	Zener diode	120V±10%, Izt=3.1mA, Zzt=380Ω, 3W	DO-214AA	1d	1a	Eic
951B	-	1SMB5951	Zener diode	120V±5%, Izt=3.1mA, Zzt=380Ω, 1.5W	DO-214AA	1d	1a	Pjt
951B	-	1SMB5951B	Zener diode	120V±5%, Izt=3.1mA, Zzt=380Ω, 3W	403A-03	3d	1s	Ons
951B	-	CZRA5951B-G	Zener diode	120V±5%, Izt=3.1mA, Zzt=380Ω, 1.5W	DO-214AC	1d	1a	Cmc
951B	-	SMBJ5951B	Zener diode	120V±5%, Izt=3.1mA, Zzt=380Ω, 1.5W	DO-214AA	1d	1w	Mco
951B	-	Z3SMB5951B	Zener diode	114..126V, Izt=3.1mA, 3W	DO-214AA	1d	1a	Ttr
952	-	1PMT5952B	Zener diode	91V±5%, Izt=16mA, 2.5W	DO-216AA	4d	1a	Msc
952A	-	1SMB5952A	Zener diode	130V±10%, Izt=2.9mA, Zzt=450Ω, 3W	DO-214AA	1d	1a	Eic
952B	-	1SMB5952	Zener diode	130V±5%, Izt=2.9mA, Zzt=450Ω, 1.5W	DO-214AA	1d	1a	Pjt
952B	-	1SMB5952B	Zener diode	130V±5%, Izt=2.9mA, Zzt=450Ω, 3W	403A-03	3d	1s	Ons
952B	-	CZRA5952B-G	Zener diode	130V±5%, Izt=2.9mA, Zzt=450Ω, 1.5W	DO-214AC	1d	1a	Cmc
952B	-	SMBJ5952B	Zener diode	130V±5%, Izt=2.9mA, Zzt=450Ω, 1.5W	DO-214AA	1d	1w	Mco
952B	-	Z3SMB5952B	Zener diode	123.5..136.5V, Izt=2.9mA, 3W	DO-214AA	1d	1a	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
953	-	1PMT5953B	Zener diode	91V±5%, Izt=16mA, 2.5W	DO-216AA	4d	1a	Msc
953A	-	1SMB5953A	Zener diode	150V±10%, Izt=2.5mA, Zzt=600Ω, 3W	DO-214AA	1d	1a	Eic
953B	-	1SMB5953	Zener diode	150V±5%, Izt=2.5mA, Zzt=600Ω, 1.5W	DO-214AA	1d	1a	Pjt
953B	-	1SMB5953B	Zener diode	150V±5%, Izt=2.5mA, Zzt=600Ω, 3W	403A-03	3d	1s	Ons
953B	-	CZRA5953B-G	Zener diode	150V±5%, Izt=2.5mA, Zzt=600Ω, 1.5W	DO-214AC	1d	1a	Cmc
953B	-	SMBJ5953B	Zener diode	150V±5%, Izt=2.5mA, Zzt=600Ω, 1.5W	DO-214AA	1d	1w	Mco
953B	-	Z3SMB5953B	Zener diode	142.5..157.5V, Izt=2.5mA, 3W	DO-214AA	1d	1a	Ttr
954	-	1PMT5954B	Zener diode	91V±5%, Izt=16mA, 2.5W	DO-216AA	4d	1a	Msc
954A	-	1SMB5954A	Zener diode	160V±10%, Izt=2.3mA, Zzt=700Ω, 3W	DO-214AA	1d	1a	Eic
954B	-	1SMB5954	Zener diode	160V±5%, Izt=2.3mA, Zzt=700Ω, 1.5W	DO-214AA	1d	1a	Pjt
954B	-	1SMB5954B	Zener diode	160V±5%, Izt=2.3mA, Zzt=700Ω, 3W	403A-03	3d	1s	Ons
954B	-	CZRA5954B-G	Zener diode	160V±5%, Izt=2.3mA, Zzt=700Ω, 1.5W	DO-214AC	1d	1a	Cmc
954B	-	SMBJ5954B	Zener diode	160V±5%, Izt=2.3mA, Zzt=700Ω, 1.5W	DO-214AA	1d	1w	Mco
954B	-	Z3SMB5954B	Zener diode	152..168V, Izt=2.3mA, 3W	DO-214AA	1d	1a	Ttr
955	-	1PMT5955B	Zener diode	91V±5%, Izt=16mA, 2.5W	DO-216AA	4d	1a	Msc
955A	-	1SMB5955A	Zener diode	180V±10%, Izt=2.1mA, Zzt=900Ω, 3W	DO-214AA	1d	1a	Eic
955B	-	1SMB5955	Zener diode	180V±5%, Izt=2.1mA, Zzt=900Ω, 1.5W	DO-214AA	1d	1a	Pjt
955B	-	1SMB5955B	Zener diode	180V±5%, Izt=2.1mA, Zzt=900Ω, 3W	403A-03	3d	1s	Ons
955B	-	CZRA5955B-G	Zener diode	180V±5%, Izt=2.1mA, Zzt=900Ω, 1.5W	DO-214AC	1d	1a	Cmc
955B	-	SMBJ5955B	Zener diode	180V±5%, Izt=2.1mA, Zzt=900Ω, 1.5W	DO-214AA	1d	1w	Mco
955B	-	Z3SMB5955B	Zener diode	171..189V, Izt=2.1mA, 3W	DO-214AA	1d	1a	Ttr
956	-	1PMT5956B	Zener diode	91V±5%, Izt=16mA, 2.5W	DO-216AA	4d	1a	Msc
956A	-	1SMB5956A	Zener diode	200V±10%, Izt=1.9mA, Zzt=1200Ω, 3W	DO-214AA	1d	1a	Eic
956B	-	1SMB5956	Zener diode	200V±5%, Izt=1.9mA, Zzt=1200Ω, 1.5W	DO-214AA	1d	1a	Pjt
956B	-	1SMB5956B	Zener diode	200V±5%, Izt=1.9mA, Zzt=1200Ω, 3W	403A-03	3d	1s	Ons
956B	-	CZRA5956B-G	Zener diode	200V±5%, Izt=1.9mA, Zzt=1900Ω, 1.5W	DO-214AC	1d	1a	Cmc
956B	-	SMBJ5956B	Zener diode	200V±5%, Izt=1.9mA, Zzt=1200Ω, 1.5W	DO-214AA	1d	1w	Mco
956B	-	Z3SMB5956B	Zener diode	190..210V, Izt=1.9mA, 3W	DO-214AA	1d	1a	Ttr
9A	-	CDZ55C9V1T	Zener diode	8.65..9.56V, Zzt=10Ω, Izt=5mA, 200mW	0603	70d	2d	Crp
9A	-	MM1Z2V0B	Zener diode	2V±2%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Sme
9A1	-	RKZ9.1AKU	Zener diode	8.29..8.73V, Izt=20mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
9B	-	MM1Z2V2B	Zener diode	2.2V±2%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123FL	7d	1a	Sme
9B1	-	RKZ9.1BKU	Zener diode	8.57..9.01V, Izt=20mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
9C	-	MM1Z2V4B	Zener diode	2.4V±2%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123FL	7d	1a	Sme
9C	-	WSB6.8D	TVS	Vbr=5.78..7.82V, Vrwm=6.8V, 1A, 10W(1ms)	SOD-923	7d	1a	Wtr
9C1	-	RKZ9.1CKU	Zener diode	8.83..9.30V, Izt=20mA, Zzt=30Ω, 500mW	TURP-FM	7d	1a	Ren
9D	-	MM1Z2V7B	Zener diode	2.7V±2%, Izt=5mA, Zzt=110Ω, 500mW	SOD-123FL	7d	1a	Sme
9E	-	MM1Z3V0B	Zener diode	3V±2%, Izt=5mA, Zzt=120Ω, 500mW	SOD-123FL	7d	1a	Sme
9F	-	KDZ6.2FV	Zener diode	5.80..6.60V, Izt=5mA, Zzt=30Ω, 100mW	TFSC	7d	1a	Kec
9F	-	KDZ6.2FVY	Zener diode	6.06..6.33V, Izt=5mA, Zzt=30Ω, 100mW	TFSC	7d	1a	Kec
9F	-	MM1Z3V3B	Zener diode	3.3V±2%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Sme
9H	-	MM1Z3V6B	Zener diode	3.6V±2%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Sme
9J	-	MM1Z3V9B	Zener diode	3.9V±2%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Sme
9K	-	MM1Z4V3B	Zener diode	4.3V±2%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Sme
9M	-	MM1Z4V7B	Zener diode	4.7V±2%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Sme
9N	-	CMDZ2L2	Zener diode	2.090..2.310V, Izt=0.5mA, Zzt=1000Ω, 250mW	SOD-323	5d	1a	Cen
9N	-	MM1Z5V1B	Zener diode	5.1V±2%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123FL	7d	1a	Sme
9P	-	CMDZ39L	Zener diode	37.05..40.95V, Izt=0.5mA, Zzt=350Ω, 250mW	SOD-323	5d	1a	Cen
9P	-	MM1Z5V6B	Zener diode	5.6V±2%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Sme
9P1	-	SML4739	Zener diode	9.1V±5%, Izt=28mA, Zzt=5Ω, 1W	DO-214AC	1d	1k	Vs
9R	-	MM1Z6V2B	Zener diode	6.2V±2%, Izt=5mA, Zzt=50Ω, 500mW	SOD-123FL	7d	1a	Sme
9V0	-	SMA9.0	TVS	Vbr=10..12.2V, Vrwm=9.0V, 17.8A, 300W(1ms)	DO-214AC	1d	1a	Mic
9V0	-	SMB9.0	TVS	Vbr=10..12.2V, Vrwm=9V, 35.5A, 600W(1ms)	DO-214AA	1d	1a	Mic
9V0	-	SMC9.0	TVS	Vbr=10..12.2V, Vrwm=9V, 88.8A, 1500W(1ms)	DO-214AB	1d	1a	Mic
9V0A	-	SMA9.0A	TVS	Vbr=10..11.1V, Vrwm=9.0V, 19.5A, 300W(1ms)	DO-214AC	1d	1a	Mic
9V0A	-	SMB9.0A	TVS	Vbr=10..11.1V, Vrwm=9V, 39A, 600W(1ms)	DO-214AA	1d	1a	Mic
9V0A	-	SMC9.0A	TVS	Vbr=10..11.1V, Vrwm=9V, 97.4A, 1500W(1ms)	DO-214AB	1d	1a	Mic
9V0C	-	SMA9.0C	TVS	Vbr=10..12.2V, Vrwm=9.0V, 17.8A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
9V0C	-	SMB9.0C	TVS	Vbr=10..12.2V, Vrwm=9V, 35.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
9V0C	-	SMC9.0C	TVS	Vbr=10..12.2V, Vrwm=9V, 88.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
9V0CA	-	SMA9.0CA	TVS	Vbr=10..11.1V, Vrwm=9.0V, 19.5A, 300W(1ms), Bidir.	DO-214AC	1ba	1j	Mic
9V0CA	-	SMB9.0CA	TVS	Vbr=10..11.1V, Vrwm=9V, 39A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mic
9V0CA	-	SMC9.0CA	TVS	Vbr=10..11.1V, Vrwm=9V, 97.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mic
9V1	-	BZD27C9V1P	Zener diode	8.65..9.56V, Zzt=4Ω, Izt=50mA, 800mW	SOD-123FL	7d	1a	Pjt
9V1	-	BZY55-C9V1	Zener diode	8.65..9.56V, Izt=5mA, Zzt=10Ω, 500mW	0805	70d	2d	Tsc
9V1	-	CDZ55C9V1	Zener diode	8.65..9.56V, Zzt=10Ω, Izt=5mA, 500mW	1206	70d	2d	Crp
9V1	-	CDZ55C9V1S	Zener diode	8.65..9.56V, Zzt=10Ω, Izt=5mA, 500mW	0805	70d	2d	Crp
9V1	-	CTZ55C9V1	Zener diode	8.65..9.56V, Izt=5mA, Zzt=10Ω, 500mW	1206	70d	2d	Ctc
9V1	-	CZRNC55C9V1-G	Zener diode	8.65..9.56V, Zt=10Ω, Izt=5mA, 500mW	1206	70d	2b	Cmc
9V1	-	CZRSC55C9V1-G	Zener diode	8.65..9.56V, Zt=10Ω, Izt=5mA, 500mW	0805	70d	2b	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
9V1	-	DFLZ9V1	Zener diode	9.1V±5%, Izt=50mA, Zzt<4Ω, 1W	SOD-123FL	7d	1d	Mco
9V1	-	MFPZ9V9	Zener diode	8.65..9.56V, Izt=50mA, Zzt=4Ω, 800mW	SOD-123FL	7d	1a	Ttr
9V1	-	P6SMBJ9V1	TVS	Vrwm=9.1V, Vbr=8.19..10V, 44A, 600W(1ms)	DO-214AA	1d	1n	Lif
9V1A	-	1.5SMC9.1A	TVS	Vrwm=7.78V, Vbr=8.65..9.5V, Ipp=112A, 1500W(1ms)	DO-214AB	1d	1b	Mde
9V1A	-	1.5SMC9.1A	TVS	Vrwm=7.78V, Vbr=8.65..9.5V, Ipp=112A, 1500W(1ms)	DO-214AB	1d	2s	Lif
9V1A	-	1.5SMC9.1A	TVS	Vrwm=7.78V, Vbr=8.65..9.5V, Ipp=112A, 1500W(1ms)	DO-214AB	1d	1k	Vs
9V1A	-	1.5SMC9.1A	TVS	Vrwm=7.78V, Vbr=8.65..9.5V, Ipp=112A, 1500W(1ms)	403	3d	2t	Ons
9V1A	-	P4SMA9.1A	TVS	Vbr=8.65..9.55V, Vrwm=8.1V, 29.9A, 400W (1ms)	DO-214AC	1d	1k	Vs
9V1A	-	P6SMB9.1A	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 44.8A, 600W(1ms)	403A	3d	1s	Ons
9V1A	-	P6SMB9.1A	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 44.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
9V1A	-	P6SMBJ9V1A	TVS	Vrwm=9.1V, Vbr=8.19..10V, 45A, 600W(1ms)	DO-214AA	1d	1n	Lif
9V1A	-	SMAJP4KE9.1A	TVS	Vrwm=7.78V, Vbr=8.65..9.55V, Ipp=30.6A, 400W(1ms)	DO-214AC	1d	1a	Mco
9V1A	-	SMBJP6KE9.1A	TVS	Vrwm=7.78V, Vbr=8.65..9.55V, Ipp=45.5A, 600W(1ms)	DO-214AA	1d	1a	Mco
9V1A	-	SMCJ1.5KE9.1A	TVS	Vrwm=7.78V, Vbr=8.65..9.55V, Ipp=113.4A, 1500W(1ms)	DO-214AB	1d	1a	Mco
9V1A	-	SZP6SMB9.1A	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 44.8A, 600W(1ms)	403A	3d	1s	Ons
9V1A	-	TVP04A9V1A-G	TVS	Vbr=8.65..9.56V, Vrwm=7.8V, Ipp=29.85A, 400W(1ms)	DO-214AC	1d	2o	Cmc
9V1A	-	TVP06B9V1A-G	TVS	Vrwm=7.8V, Vbr=8.65..9.56V, Ipp=44.78A, 600W(1ms)	DO-214AA	1d	2o	Cmc
9V1B	-	BZT52B9V1	Zener diode	8.92..9.28V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tsc
9V1B	-	MMSZ9V1BW	Zener diode	8.92..9.28V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tac
9V1B	-	Z3SMB9.1B	Zener diode	8.65..9.56V, Izt=82mA, Zzt=3Ω, 3W	DO-214AA	1d	1a	Ttr
9V1C	-	1.5SMC9.1CA	TVS	Vrwm=7.78V, Vbr=8.65..9.5V, Ipp=112A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
9V1C	-	1.5SMC9.1CA	TVS	Vrwm=7.78V, Vbr=8.65..9.5V, Ipp=112A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
9V1C	-	1.5SMC9.1CA	TVS	Vrwm=7.78V, Vbr=8.65..9.5V, Ipp=112A, 1500W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
9V1C	-	P4SMA9.1CA	TVS	Vbr=8.65..9.55V, Vrwm=8.1V, 29.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1l	Vs
9V1C	-	P6SMB9.1CA	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 44.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
9V1C	-	P6SMBJ9V1C	TVS	Vrwm=9.1V, Vbr=8.19..10V, 44A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
9V1C	-	SMAJP4KE9.1CA	TVS	Vrwm=7.78V, Vbr=8.65..9.55V, Ipp=30.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
9V1C	-	SMBJP6KE9.1CA	TVS	Vrwm=7.78V, Vbr=8.65..9.55V, Ipp=45.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mco
9V1C	-	SMCJ1.5KE9.1CA	TVS	Vrwm=7.78V, Vbr=8.65..9.55V, Ipp=113.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
9V1C	-	TVP04A9V1CA-G	TVS	Vbr=8.65..9.56V, Vrwm=7.8V, Ipp=29.85A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
9V1C	-	TVP06B9V1ACA-G	TVS	Vrwm=7.8V, Vbr=8.65..9.56V, Ipp=44.78A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
9V1CA	-	P6SMBJ9V1CA	TVS	Vrwm=9.1V, Vbr=8.19..10V, 45A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
9V1Z	-	BZT52C9V1	Zener diode	8.65..9.56V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tsc
9V1Z	-	MMSZ9V1CW	Zener diode	8.65..9.56V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tac
9V1Z	-	TCMMSZ9V1	Zener diode	9.1V±5%, Izt=5mA, Zzt=14Ω, 500mW	SOD-123FL	7d	1a	Tac
9V1Z	-	ZGFM059V1C-MH	Zener diode	8.65..9.56V, Izt=5mA, Zzt=14Ω, 500mW	SOD-123	5d	1a	Pic
9X	-	MM1Z6V8B	Zener diode	6.8V±2%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Sme
9Y	-	KDZ24VVY	Zener diode	23.72..24.78V, Izt=5mA, Zzt=40Ω, 100mW	VSC	7d	1a	Kec
9Y	-	MM1Z7V5B	Zener diode	7.5V±2%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Sme
9Z	-	BZT52B5V6S	Zener diode	5.49..5.71V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1a	Tsc
9Z	-	MM1Z8V2B	Zener diode	8.2V±2%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Sme
9Z	-	MM3Z5V6B	Zener diode	5.49..5.71V, Zzt=37Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
9Z	-	MM3Z5V6BW	Zener diode	5.49..5.71V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1a	Tac
9Z	-	TCMM3Z5V6B	Zener diode	5.6V±2%, Izt=5mA, Zzt=37Ω, 200mW	SOD-323FL	7d	1a	Tac
A	-	1SS355	Si-diode	Sw-Fast, 40V, 100mA, <3pF, <4ns	SOD-323	5d	1a	Rhm
A	-	1SS400	Si-diode	Sw, 80V, 100mA, Vf<1.2V(100mA), <4ns	SOD-523	6d	1a	Lrc
A	-	BA892-02V	PIN-diode	VHF, TV-Band-Sw, 35V, 0.1A, Vf<1V(100mA), 1.4pF, <120ns	SOD-523	6d	1a	Inf
a	-	BAR50-02V	PIN-diode	RF-att, 50V, 100mA, 250mW, Vf<1.1V(50mA), <0.5pF	SOD-523	6d	1a	Inf
A	-	CH501S-40PT	Si-diode	SBD, 45V, 100mA, Vf<0.55V(100mA)	SOD-523	8d	1a	Chm
A	-	EP05Q04	Si-diode	SBR, 40V, 500mA, Vf<0.51V(500mA)	SOD-123	5d	1a	Nih
A	-	FSS13M	Si-diode	SBR, 30V, 1A, Vf<0.55V(1A)	MicroSMA	7d	2ja	Fag
A	-	GBLC05I	TVS	Vrwm=5V, 5A, 350W(1ms), 0.6pF	SOD-323	5d	1a	Prt
A	-	MA2H735	Si-diode	SBR, HF, 30V, 1A, Vf<0.5V(1A), 50pF, 30ns	SOD-106	1d	1a	Pan
A	-	MM9D6V8	Zener diode	6.46..7.14V, Izt=5mA, Zzt=40Ω, 200mW	SOD-923	7d	1n	Wtr
a	-	MMSZ5228BPT	Zener diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 225mW	SOD-523	6d	1a	Chm
A	-	NZ9F3V9ST	Zener diode	3.89..4.16V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	2m	Ons
A	-	NZ9F6V8T	Zener diode	6.46..7.14V, Izt=5mA, Zzt=40Ω, 200mW	SOD-923	7d	1n	Ons
A	au	MMSZ5249BPT	Zener diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 225mW	SOD-523	6d	1a	Chm
A	az	BAR50-03W	PIN-diode	RF-att, 50V, 100mA, 250mW, Vf<1.1V(50mA), <0.5pF	SOD-323	5d	2	Inf
A	ba	BAT14-098	Si-diode	Schottky, UHF-mix, 4V, 90mA, Vf<0.66V(10mA, <0.35pF	SOD-123	5d	2	Sie
a.	-	MMSZ5228SPT	Zener diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 225mW	SOD-523	6d	1a	Chm
A.	au	MMSZ5249SPT	Zener diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 225mW	SOD-523	6d	1a	Chm
A0	-	1N5817WB	Si-diode	SBR, 20V, 1A, Vf<0.45V(1A), 120pF	SOD-123FL	7d	1a	Sme
A0	-	HVC202B	C-diode	UHF/VHF-tuning, 32V, 2.06..14.15pF(25V..2V/1MHz)	UFP	6d	1b	Ren
A0	-	MMPZ5222BPT	Zener diode	2.375..2.625V, Izt=5mA, Zzt=100Ω, 225mW	SOD-323	5d	1a	Chm
A05	-	SMBYW02-50	Si-diode	Rectifier, Fast-Recovery, 50V, 2A, Vf<0.65V(1A), <35ns	DO-214AA	1d	1q	Ste
A1	-	BA591	PIN-diode	VHF, TV-Band-Sw, 35V, 100mA, 500mW, 0.8pF	SOD-323	5d	1a	Phi
A1	-	BAS16H	Si-diode	Sw, Fast, 75V, 215mA, 250mW, <6ns	SOD-123F	6d	1a	Nxp
A1	-	BAS240	Si-diode	SBD, 40V, 120mA, Vf<1V(40mA), <5pF	SOD-110	12d	1a	Phi
A1	-	BB208-02	C-diode	VCXO/TCXO, 10V, 20mA, 21.5..4.9pF(1..7.5V)	SOD-523	6d	1a	Phi



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
A1	-	FSS12	Si-diode	SBR, 20V, 1A, Vf<0.5V(1A)	DO-214AC	1d	2j	Fag
A1	-	HVC300B	C-diode	VHF-tuning, 34V, 2.65/47pF(25V..2V/1MHz)	UFP	6d	1b	Ren
A1	-	MM3Z5221B	Zener diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Bts
A1	-	MM3Z5221BH	Zener diode	2.28..2.52V, Izt=20mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Zow
A1	-	MMSZ10T	Zener diode	10V±5%, Izt=5mA, Zzt=20Ω, 500mW	SOD-123	5d	1u	Mot
A1	-	PTVS3V3S1UR	TVS	Vrwm=3.3V, Vbr=5.20..6.0V, 43.8A, 350W (1ms)	SOD-123W	7d	1a	Nxp
A1	-	SM4001SPT	Si-diode	Rectifer, 50V, 1A	SOD-123S	7d	1a	Chm
A10	-	DAM3MA10	ESDP-diode	Vdc=7V, Vzt=9.4..10.6V, Izt=75mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A10	-	SMBYW02-100	Si-diode	Rectifier, Fast-Recovery, 100V, 2A, Vf<0.71(1A), <35ns	DO-214AA	1d	1q	Ste
A10	-	SSCD110	Si-diode	SBR, 100V, 1A, Vf<0.85V(1A)	1206	14d	1v	Zow
A100A	-	SMA100A	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=2.47A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A100CA	-	SMA100CA	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=2.47A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A10A	-	1KSMB6.8A	TVS	Vrwm=5.80V, Vbr=6.45..7.14V, 95.2A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10A	-	P4SSMJ16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19A, 400W(1ms)	DO-214AC	1d	1a	Chm
A10A	-	SMA10A	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=23.50A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A10B	-	1KSMB7.5A	TVS	Vrwm=6.40V, Vbr=7.13..7.88V, 88.5A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10C	-	1KSMB8.2A	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, 82.6A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10C	-	P4SSMJ16CA	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A10CA	-	SMA10CA	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=23.50A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A10D	-	1KSMB9.1A	TVS	Vrwm=7.78V, Vbr=8.65..9.55V, 74.6A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10E	-	1KSMB10A	TVS	Vrwm=8.55V, Vbr=9.50..10.50V, 69.0A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10F	-	1KSMB11A	TVS	Vrwm=9.40V, Vbr=10.50..11.60V, 64.1A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10G	-	1KSMB12A	TVS	Vrwm=10.20V, Vbr=11.40..12.60V, 59.9A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10H	-	1KSMB13A	TVS	Vrwm=11.10V, Vbr=12.40..13.70V, 54.9A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10I	-	1KSMB15A	TVS	Vrwm=12.80V, Vbr=14.30..15.80V, 47.2A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10J	-	1KSMB16A	TVS	Vrwm=13.60V, Vbr=15.20..16.80V, 44.4A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10K	-	1KSMB18A	TVS	Vrwm=15.30V, Vbr=17.10..18.90V, 39.2A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10L	-	1KSMB20A	TVS	Vrwm=17.10V, Vbr=19.0..21.0V, 36.1A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10M	-	1KSMB22A	TVS	Vrwm=18.80V, Vbr=20.90..23.10V, 32.7A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10N	-	1KSMB24A	TVS	Vrwm=20.50V, Vbr=22.80..25.20V, 30.1A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10O	-	1KSMB27A	TVS	Vrwm=23.10V, Vbr=25.70..28.40V, 26.7A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10P	-	1KSMB30A	TVS	Vrwm=25.60V, Vbr=28.50..31.50V, 24.2A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10Q	-	1KSMB33A	TVS	Vrwm=28.20V, Vbr=31.40..34.70V, 21.9A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10R	-	1KSMB36A	TVS	Vrwm=30.80V, Vbr=34.20..37.80V, 20.0A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10S	-	1KSMB39A	TVS	Vrwm=33.30V, Vbr=37.10..41.0V, 18.6A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10T	-	1KSMB43A	TVS	Vrwm=36.80V, Vbr=40.90..45.20V, 16.9A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10U	-	1KSMB47A	TVS	Vrwm=40.20V, Vbr=44.70..49.40V, 15.4A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10V	-	1KSMB51A	TVS	Vrwm=43.60V, Vbr=48.50..53.60V, 14.3A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10W	-	1KSMB56A	TVS	Vrwm=47.80V, Vbr=53.20..58.80V, 13.0A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10X	-	1KSMB62A	TVS	Vrwm=53.0V, Vbr=58.90..65.10V, 11.8A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10Y	-	1KSMB68A	TVS	Vrwm=58.10V, Vbr=64.60..71.40V, 10.9A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A10Z	-	1KSMB75A	TVS	Vrwm=64.10V, Vbr=71.30..78.80V, 9.7A, 1000W(1ms)	DO-214AA	1d	2s	Lif
A11	-	DAM3MA11	ESDP-diode	Vdc=8V, Vzt=10.4..11.6V, Izt=75mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A110A	-	SMA110A	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=2.26A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A110CA	-	SMA110CA	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=2.26A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A11A	-	P4SSMJ18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17A, 400W(1ms)	DO-214AC	1d	1a	Chm
A11A	-	SMA11A	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=22.0A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A11C	-	P4SSMJ18CA	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A11CA	-	SMA11CA	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=22.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A12	-	DAM1MA12	ESDP-diode	Vdc=9V, Vzt=11.4..12.7V, Izt=25mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A12	-	DAM3MA12	ESDP-diode	Vdc=9V, Vzt=11.4..12.7V, Izt=75mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A120A	-	SMA120A	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=2.07A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A120CA	-	SMA120CA	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=2.07A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A12A	-	P4SSMJ20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15A, 400W(1ms)	DO-214AC	1d	1a	Chm
A12A	-	SMA12A	TVS	Vrwm=12V, Vbr=13.30..14.70V, Ipp=20.10A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A12C	-	P4SSMJ20CA	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A12CA	-	SMA12CA	TVS	Vrwm=12V, Vbr=13.30..14.70V, Ipp=20.10A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A13	-	DAM1MA13	ESDP-diode	Vdc=10V, Vzt=12.4..14.1V, Izt=25mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A13	-	DAM3MA13	ESDP-diode	Vdc=10V, Vzt=12.4..14.1V, Izt=75mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A130A	-	SMA130A	TVS	Vrwm=130V, Vbr=144.0..159.0V, Ipp=1.91A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A130CA	-	SMA130CA	TVS	Vrwm=130V, Vbr=144.0..159.0V, Ipp=1.91A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A13A	-	P4SSMJ22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14A, 400W(1ms)	DO-214AC	1d	1a	Chm
A13A	-	SMA13A	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=18.60A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A13C	-	P4SSMJ22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A13CA	-	SMA13CA	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=18.60A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A140A	-	SMA140A	TVS	Vrwm=140V, Vbr=155.0..171.0V, Ipp=1.76A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A140CA	-	SMA140CA	TVS	Vrwm=140V, Vbr=155.0..171.0V, Ipp=1.76A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A14A	-	P4SSMJ24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13A, 400W(1ms)	DO-214AC	1d	1a	Chm
A14A	-	SMA14A	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=17.20A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A14C	-	P4SSMJ24CA	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
A14CA	-	SMA14CA	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=17.20A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A15	-	DAM1MA15	ESDP-diode	Vdc=11V, Vzt=13.5..15.6V, Izt=25mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A15	-	DAM3MA15	ESDP-diode	Vdc=11V, Vzt=13.5..15.6V, Izt=75mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A15	-	SMBYW02-150	Si-diode	Rectifier, Fast-Recovery, 150V, 2A, Vf<0.85V(1A), <35ns	DO-214AA	1d	1q	Ste
A150A	-	SMA150A	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=1.65A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A150CA	-	SMA150CA	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=1.65A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A15A	-	P4SSMJ27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 400W(1ms)	DO-214AC	1d	1a	Chm
A15A	-	SMA15A	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=16.40A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A15C	-	P4SSMJ27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A15CA	-	SMA15CA	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=16.40A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A16	-	DAM1MA16	ESDP-diode	Vdc=12V, Vzt=15.3..17.1V, Izt=15mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A16	-	DAM3MA16	ESDP-diode	Vdc=12V, Vzt=15.3..17.1V, Izt=75mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A160A	-	SMA160A	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=1.54A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A160CA	-	SMA160CA	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=1.54A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A16A	-	P4SSMJ30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10A, 400W(1ms)	DO-214AC	1d	1a	Chm
A16A	-	SMA16A	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=15.40A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A16C	-	P4SSMJ30CA	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A16CA	-	SMA16CA	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=15.40A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A170A	-	SMA170A	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=1.45A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A170CA	-	SMA170CA	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=1.45A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A17A	-	P4SSMJ33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9A, 400W(1ms)	DO-214AC	1d	1a	Chm
A17A	-	SMA17A	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=14.50A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A17C	-	P4SSMJ33CA	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A17CA	-	SMA17CA	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=14.50A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A18	-	DAM1MA18	ESDP-diode	Vdc=13V, Vzt=16.8..19.1V, Izt=15mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A18	-	DAM3MA18	ESDP-diode	Vdc=13V, Vzt=16.8..19.1V, Izt=45mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A180A	-	SMA180A	TVS	Vrwm=180.0V, Vbr=200.0..220.0V, Ipp=1.37A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A180CA	-	SMA180CA	TVS	Vrwm=180.0V, Vbr=200.0..220.0V, Ipp=1.37A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A18A	-	P4SSMJ36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 400W(1ms)	DO-214AC	1d	1a	Chm
A18A	-	SMA18A	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=13.70A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A18C	-	P4SSMJ36CA	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A18CA	-	SMA18CA	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=13.70A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A190A	-	SMA190A	TVS	Vrwm=190.0V, Vbr=211.0..232.0V, Ipp=1.30A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A190CA	-	SMA190CA	TVS	Vrwm=190.0V, Vbr=211.0..232.0V, Ipp=1.30A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A19A	-	P4SSMJ39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 400W(1ms)	DO-214AC	1d	1a	Chm
A19A	-	SMA19A	TVS	Vrwm=19.0V, Vbr=21.10..23.30V, Ipp=13.0A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A19C	-	P4SSMJ39CA	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A19CA	-	SMA19CA	TVS	Vrwm=19.0V, Vbr=21.10..23.30V, Ipp=13.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A1A	-	P4SSMJ6.8A	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 40A, 400W(1ms)	DO-214AC	1d	1a	Chm
A1C	-	P4SSMJ6.8CA	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 40A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A2	-	1N4148W	Si-diode	Sw, Fast, 75V, 150mA, <2pF, <2ns	SOD-123	5d	1a	Cen
A2	-	1N4148WS	Si-diode	Sw, Fast, 75V, 150mA, <2pF, <2ns	SOD-323	5d	1a	Gse
A2	-	BA592	PIN-diode	VHF, TV-Band-Sw, 35V, 100mA, Vf<1V(100mA), 1.4pF, <120ns	SOD-323	5d	1a	Phi
A2	-	BB184	C-diode	VCO-TV tuning, 13V, 10mA, 2..14pF(10..1V)	SOD-523	6d	1a	Phi
A2	-	BB208-03	C-diode	VCXO/TCXO, 10V, 20mA, 21.5..4.9pF(1..7.5V)	SOD-323	5d	1a	Phi
A2	-	EDZ5.1B	Zener diode	4.98..5.20V, Izt=5mA, Zzt=80Ω, 150mW	SOD-523	6d	1a	Rhm
A2	-	EDZV5.1B	Zener diode	4.98..5.20V, Izt=5.0mA, Zzt=80Ω, 150mW	SOD-523	6d	2v	Rhm
A2	-	FDZ5.1EV	Zener diode	4.980..5.20V, Izt=5mA, Zzt=80Ω, 150mW	SOD-523	6d	1a	Fis
A2	-	FDZ5.1VT	Zener diode	4.980..5.200V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Fis
A2	-	FSS13	Si-diode	SBR, 30V, 1A, Vf<0.5V(1A)	DO-214AC	1d	2j	Fag
A2	-	LBZT52B5V1T1G	Zener diode	4.98..5.2V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
A2	-	LEDZ5.1BT1G	Zener diode	4.98..5.2V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
A2	-	LUDZS5.1BT1G	Zener diode	4.98..5.2V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
A2	-	MM3Z5241B	Zener diode	11V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOD-323FL	7d	1a	Bts
A2	-	MM3Z5241BH	Zener diode	10.45..11.55V, Izt=20mA, Zzt=22Ω, 300mW	SOD-323	5d	1a	Zow
A2	-	MMSZ11T	Zener diode	11V±5%, Izt=5mA, Zzt=20Ω, 500mW	SOD-123	5d	1u	Mot
A2	-	MSCD102	Si-diode	SBR, 20V, 1A, Vf<0.45V(1A)	0805	14d	1v	Zow
A2	-	PTVS5V0S1UR	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 43.5A, 400W (1ms)	SOD-123W	7d	1a	Nxp
A2	-	SM4002SPT	Si-diode	Rectifer, 100V, 1A	SOD-123S	7d	1a	Chm
A2	-	SSCD102	Si-diode	SBR, 20V, 1A, Vf<0.5V(1A)	1206	14d	1v	Zow
A2	-	TDZ5.1B	Zener diode	5.1V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
A2	-	UDZS5.1B	Zener diode	4.98..5.20V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Wtr
A2	-	UDZS5.1B	Zener diode	5.1V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
A2	-	UDZV5.1B	Zener diode	4.98..5.20V, Izt=5.0mA, Zzt=80Ω, 200mW	SOD-323	5d	2v	Rhm
A2	-	VDZS5.1B	Zener diode	5.1V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
A20	-	DAM1MA20	ESDP-diode	Vdc=14V, Vzt=18.8..21.2V, Izt=15mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A20	-	DAM3MA20	ESDP-diode	Vdc=14V, Vzt=18.8..21.2V, Izt=45mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A20	-	SMBYW02-200	Si-diode	Rectifier, Fast-Recovery, 200V, 2A, Vf<0.91V(1A), <35ns	DO-214AA	1d	1q	Ste
A20A	-	P4SSMJ43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 400W(1ms)	DO-214AC	1d	1a	Chm
A20A	-	SMA20A	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=12.30A, 400W(1ms)	DO-214AC	1d	1a	Ctc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
A20C	-	P4SSMJ43CA	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A20CA	-	SMA20CA	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=12.30A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A21A	-	P4SSMJ47A	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 5.0A, 400W(1ms)	DO-214AC	1d	1a	Chm
A21C	-	P4SSMJ47CA	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 5.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A22	-	DAM1MA22	ESDP-diode	Vdc=16V, Vzt=20.8..23.3V, Izt=15mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A22	-	DAM3MA22	ESDP-diode	Vdc=16V, Vzt=20.8..23.3V, Izt=45mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A22A	-	P4SSMJ51A	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 400W(1ms)	DO-214AC	1d	1a	Chm
A22A	-	SMA22A	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=11.30A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A22C	-	P4SSMJ51CA	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A22CA	-	SMA22CA	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=11.30A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A23A	-	P4SSMJ56A	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 400W(1ms)	DO-214AC	1d	1a	Chm
A23C	-	P4SSMJ56CA	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A24	-	DAM1MA24	ESDP-diode	Vdc=18V, Vzt=22.7..25.6V, Izt=10mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A24	-	DAM3MA24	ESDP-diode	Vdc=18V, Vzt=22.7..25.6V, Izt=30mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A24A	-	P4SSMJ62A	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 400W(1ms)	DO-214AC	1d	1a	Chm
A24A	-	SMA24A	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=10.30A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A24C	-	P4SSMJ62CA	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A24CA	-	SMA24CA	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=10.30A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A25A	-	P4SSMJ68A	TVS	Vbr=64.6..71.4V, Vrwm=58.0V, 4.6A, 400W(1ms)	DO-214AC	1d	1a	Chm
A25C	-	P4SSMJ68CA	TVS	Vbr=64.6..71.4V, Vrwm=58.0V, 4.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A26A	-	P4SSMJ75A	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 400W(1ms)	DO-214AC	1d	1a	Chm
A26A	-	SMA26A	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=9.50A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A26C	-	P4SSMJ75CA	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A26CA	-	SMA26CA	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=9.50A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A27	-	DAM1MA27	ESDP-diode	Vdc=20V, Vzt=25.1..28.9V, Izt=10mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A27	-	DAM3MA27	ESDP-diode	Vdc=20V, Vzt=25.1..28.9V, Izt=30mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A27A	-	P4SSMJ82A	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 400W(1ms)	DO-214AC	1d	1a	Chm
A27C	-	P4SSMJ82CA	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A28A	-	P4SSMJ91A	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 400W(1ms)	DO-214AC	1d	1a	Chm
A28A	-	SMA28A	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=8.81A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A28C	-	P4SSMJ91CA	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A28CA	-	SMA28CA	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=8.81A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A29A	-	P4SSMJ100A	TVS	Vbr=95..105V, Vrwm=85.5V, 3.1A, 400W(1ms)	DO-214AC	1d	1a	Chm
A29C	-	P4SSMJ100CA	TVS	Vbr=95..105V, Vrwm=85.5V, 3.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A2A	-	P4SSMJ7.5A	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 37A, 400W(1ms)	DO-214AC	1d	1a	Chm
A2C	-	P4SSMJ7.5CA	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 37A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A3	-	1N4448W	Si-diode	Sw, Fast, 100V, 500mA, <2pF, <4ns	SOD-123	5d	1a	Cen
A3	-	1N4448WS	Si-diode	Sw, Fast, 100V, 500mA, <2pF, <4ns	SOD-323	5d	1a	Gse
A3	-	BAP64-03	PIN-diode	RF, 175V, 100mA, 500mW, 0.35pF, 2Ω(10mA/100MHz)	SOD-323	5d	1a	Phi
A3	-	BB198	C-diode	VCO, 20V, 100mA, 300mW, 6.8..28.5pF(4..1V)	SOD-523	6d	1a	Phi
A3	-	FSS14	Si-diode	SBR, 40V, 1A, Vf<0.5V(1A)	DO-214AC	1d	2j	Fag
A3	-	MM3Z5262B	Zener diode	51V±5%, Izt=2.5mA, Zzt=125Ω, 200mW	SOD-323FL	7d	1a	Bts
A3	-	MM3Z5262BH	Zener diode	48.45..53.55V, Izt=2.5mA, Zzt=125Ω, 300mW	SOD-323	5d	1a	Zow
A3	-	MMSZ12T	Zener diode	12V±5%, Izt=5mA, Zzt=25Ω, 500mW	SOD-123	5d	1u	Mot
A3	-	PTVS6V0S1UR	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 38.8A, 400W (1ms)	SOD-123W	7d	1a	Nxp
A3	-	SM4003SPT	Si-diode	Rectifer, 200V, 1A	SOD-123S	7d	1a	Chm
A30	-	DAM1MA30	ESDP-diode	Vdc=22V, Vzt=28.0..32.0V, Izt=10mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A30	-	DAM3MA30	ESDP-diode	Vdc=22V, Vzt=28.0..32.0V, Izt=30mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A30A	-	P4SSMJ110A	TVS	Vbr=105..116V, Vrwm=94V, 2.8A, 400W(1ms)	DO-214AC	1d	1a	Chm
A30A	-	SMA30A	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=8.26A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A30C	-	P4SSMJ110CA	TVS	Vbr=105..116V, Vrwm=94V, 2.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A30CA	-	SMA30CA	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=8.26A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A31A	-	P4SSMJ120A	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 400W(1ms)	DO-214AC	1d	1a	Chm
A31C	-	P4SSMJ120CA	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A32A	-	P4SSMJ130A	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 400W(1ms)	DO-214AC	1d	1a	Chm
A32C	-	P4SSMJ130CA	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A33	-	DAM1MA33	ESDP-diode	Vdc=24V, Vzt=31.0..35.0V, Izt=10mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A33	-	DAM3MA33	ESDP-diode	Vdc=24V, Vzt=31.0..35.0V, Izt=30mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A33A	-	P4SSMJ150A	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 400W(1ms)	DO-214AC	1d	1a	Chm
A33A	-	SMA33A	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=7.50A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A33C	-	P4SSMJ150CA	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A33CA	-	SMA33CA	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=7.50A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A34	-	MBRA340	Si-diode	SBR, 40V, 3A, Vf<0.45V(3A)	DO-214AC	1d	1f	Ons
A34A	-	P4SSMJ160A	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 400W(1ms)	DO-214AC	1d	1a	Chm
A34C	-	P4SSMJ160CA	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A35A	-	P4SSMJ170A	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 400W(1ms)	DO-214AC	1d	1a	Chm
A35C	-	P4SSMJ170CA	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A36	-	DAM1MA36	ESDP-diode	Vdc=26V, Vzt=33.4..38.6V, Izt=10mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A36	-	DAM3MA36	ESDP-diode	Vdc=26V, Vzt=33.4..38.6V, Izt=30mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A36A	-	P4SSMJ180A	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 400W(1ms)	DO-214AC	1d	1a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
A36A	-	SMA36A	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=6.88A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A36C	-	P4SSMJ180CA	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A36CA	-	SMA36CA	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=6.88A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A37A	-	P4SSMJ200A	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 400W(1ms)	DO-214AC	1d	1a	Chm
A37C	-	P4SSMJ200CA	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A39	-	DAM1MA39	ESDP-diode	Vdc=28V, Vzt=36.1..41.9V, Izt=10mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A39	-	DAM3MA39	ESDP-diode	Vdc=28V, Vzt=36.1..41.9V, Izt=20mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A3A	-	P4SSMJ8.2A	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 35A, 400W(1ms)	DO-214AC	1d	1a	Chm
A3C	-	P4SSMJ8.2CA	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 35A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A4	-	1N4150W	Si-diode	Sw, Fast, 50V, 200mA, <2.5pF(0V), <4ns	SOD-323	5d	1a	Cen
A4	-	BAT760	Si-diode	Schottky, Sw, U-Fast, 20V, 1A, Vf<0.55V(1A), <0.3ns	SOD-323	5d	1a	Phi
A4	-	FSS15	Si-diode	SBR, 50V, 1A, Vf<0.75V(1A)	DO-214AC	1d	2j	Fag
A4	-	MM1Z5221B	Zener diode	2.28..2.52V, Izt=20mA, Zzt=30Ω, 500mW	SOD-323FL	7d	1a	Eic
A4	-	MM1Z5221BH	Zener diode	2.28..2.52V, Izt=20mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Zow
A4	-	MMSZ13T	Zener diode	13V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1u	Mot
A4	-	MMSZ5221B	Zener diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Eic
A4	-	MSCD104	Si-diode	SBR, 40V, 1A, Vf<0.5V(1A)	0805	14d	1v	Zow
A4	-	PTVS6V5S1UR	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 35.7A, 400W (1ms)	SOD-123W	7d	1a	Nxp
A4	-	SM4004SPT	Si-diode	Rectifer, 400V, 1A	SOD-123S	7d	1a	Chm
A4	-	SSCD104	Si-diode	SBR, 40V, 1A, Vf<0.5V(1A)	1206	14d	1v	Zow
A40A	-	SMA40A	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=6.20A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A40CA	-	SMA40CA	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=6.20A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A43	-	DAM1MA43	ESDP-diode	Vdc=31V, Vzt=39.8..46.2V, Izt=6mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A43	-	DAM3MA43	ESDP-diode	Vdc=31V, Vzt=39.8..46.2V, Izt=20mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A43A	-	SMA43A	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=5.76A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A43CA	-	SMA43CA	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=5.76A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A45A	-	SMA45A	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=5.50A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A45CA	-	SMA45CA	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=5.50A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A47	-	DAM1MA47	ESDP-diode	Vdc=34V, Vzt=43.3..50.7V, Izt=6mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A47	-	DAM3MA47	ESDP-diode	Vdc=34V, Vzt=43.3..50.7V, Izt=20mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A4741	-	SMA4741	Zener diode	11V±5%, Izt=23mA, Zzt<8Ω, 1W	DO-214AC	1d	1t	Dac
A4741A	-	SMA4741A	Zener diode	11V±10%, Izt=23mA, Zzt<8Ω, 1W	DO-214AC	1d	1t	Dac
A4742	-	SMA4742	Zener diode	12V±5%, Izt=21mA, Zzt<9Ω, 1W	DO-214AC	1d	1t	Dac
A4742A	-	SMA4742A	Zener diode	12V±10%, Izt=21mA, Zzt<9Ω, 1W	DO-214AC	1d	1t	Dac
A4743	-	SMA4743	Zener diode	13V±5%, Izt=19mA, Zzt<10Ω, 1W	DO-214AC	1d	1t	Dac
A4743A	-	SMA4743A	Zener diode	13V±10%, Izt=19mA, Zzt<10Ω, 1W	DO-214AC	1d	1t	Dac
A4744	-	SMA4744	Zener diode	15V±5%, Izt=17mA, Zzt<14Ω, 1W	DO-214AC	1d	1t	Dac
A4744A	-	SMA4744A	Zener diode	15V±10%, Izt=17mA, Zzt<14Ω, 1W	DO-214AC	1d	1t	Dac
A4745	-	SMA4745	Zener diode	16V±5%, Izt=15.5mA, Zzt<16Ω, 1W	DO-214AC	1d	1t	Dac
A4745A	-	SMA4745A	Zener diode	16V±10%, Izt=15.5mA, Zzt<16Ω, 1W	DO-214AC	1d	1t	Dac
A4746	-	SMA4746	Zener diode	18V±5%, Izt=14mA, Zzt<20Ω, 1W	DO-214AC	1d	1t	Dac
A4746A	-	SMA4746A	Zener diode	18V±10%, Izt=14mA, Zzt<20Ω, 1W	DO-214AC	1d	1t	Dac
A4747	-	SMA4747	Zener diode	20V±5%, Izt=12.5mA, Zzt<22Ω, 1W	DO-214AC	1d	1t	Dac
A4747A	-	SMA4747A	Zener diode	20V±10%, Izt=12.5mA, Zzt<22Ω, 1W	DO-214AC	1d	1t	Dac
A4748	-	SMA4748	Zener diode	22V±5%, Izt=11.5mA, Zzt<23Ω, 1W	DO-214AC	1d	1t	Dac
A4748A	-	SMA4748A	Zener diode	22V±10%, Izt=11.5mA, Zzt<23Ω, 1W	DO-214AC	1d	1t	Dac
A4749	-	SMA4749	Zener diode	24V±5%, Izt=10.5mA, Zzt<25Ω, 1W	DO-214AC	1d	1t	Dac
A4749A	-	SMA4749A	Zener diode	24V±10%, Izt=10.5mA, Zzt<25Ω, 1W	DO-214AC	1d	1t	Dac
A4750	-	SMA4750	Zener diode	27V±5%, Izt=9.5mA, Zzt<35Ω, 1W	DO-214AC	1d	1t	Dac
A4750A	-	SMA4750A	Zener diode	27V±10%, Izt=9.5mA, Zzt<35Ω, 1W	DO-214AC	1d	1t	Dac
A4751	-	SMA4751	Zener diode	30V±5%, Izt=8.5mA, Zzt<40Ω, 1W	DO-214AC	1d	1t	Dac
A4751A	-	SMA4751A	Zener diode	30V±10%, Izt=8.5mA, Zzt<40Ω, 1W	DO-214AC	1d	1t	Dac
A4752	-	SMA4752	Zener diode	33V±5%, Izt=7.5mA, Zzt<45Ω, 1W	DO-214AC	1d	1t	Dac
A4752A	-	SMA4752A	Zener diode	33V±10%, Izt=7.5mA, Zzt<45Ω, 1W	DO-214AC	1d	1t	Dac
A4753	-	SMA4753	Zener diode	36V±5%, Izt=7.0mA, Zzt<50Ω, 1W	DO-214AC	1d	1t	Dac
A4753A	-	SMA4753A	Zener diode	36V±10%, Izt=7.0mA, Zzt<50Ω, 1W	DO-214AC	1d	1t	Dac
A4754	-	SMA4754	Zener diode	39V±5%, Izt=6.5mA, Zzt<60Ω, 1W	DO-214AC	1d	1t	Dac
A4754A	-	SMA4754A	Zener diode	39V±10%, Izt=6.5mA, Zzt<60Ω, 1W	DO-214AC	1d	1t	Dac
A4755	-	SMA4755	Zener diode	43V±5%, Izt=6.0mA, Zzt<70Ω, 1W	DO-214AC	1d	1t	Dac
A4755A	-	SMA4755A	Zener diode	43V±10%, Izt=6.0mA, Zzt<70Ω, 1W	DO-214AC	1d	1t	Dac
A4756	-	SMA4756	Zener diode	47V±5%, Izt=5.5mA, Zzt<80Ω, 1W	DO-214AC	1d	1t	Dac
A4756A	-	SMA4756A	Zener diode	47V±10%, Izt=5.5mA, Zzt<80Ω, 1W	DO-214AC	1d	1t	Dac
A4757	-	SMA4757	Zener diode	51V±5%, Izt=5mA, Zzt<95Ω, 1W	DO-214AC	1d	1t	Dac
A4757A	-	SMA4757A	Zener diode	51V±10%, Izt=5mA, Zzt<95Ω, 1W	DO-214AC	1d	1t	Dac
A4758	-	SMA4758	Zener diode	56V±5%, Izt=4.5mA, Zzt<110Ω, 1W	DO-214AC	1d	1t	Dac
A4758A	-	SMA4758A	Zener diode	56V±10%, Izt=4.5mA, Zzt<110Ω, 1W	DO-214AC	1d	1t	Dac
A4759	-	SMA4759	Zener diode	62V±5%, Izt=4.0mA, Zzt<125Ω, 1W	DO-214AC	1d	1t	Dac
A4759A	-	SMA4759A	Zener diode	62V±10%, Izt=4.0mA, Zzt<125Ω, 1W	DO-214AC	1d	1t	Dac
A4760	-	SMA4760	Zener diode	68V±5%, Izt=3.7mA, Zzt<150Ω, 1W	DO-214AC	1d	1t	Dac
A4760A	-	SMA4760A	Zener diode	68V±10%, Izt=3.7mA, Zzt<150Ω, 1W	DO-214AC	1d	1t	Dac

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
A4761	-	SMA4761	Zener diode	75V±5%, Izt=3.3mA, Zzt<175Ω, 1W	DO-214AC	1d	1t	Dac
A4761A	-	SMA4761A	Zener diode	75V±10%, Izt=3.3mA, Zzt<175Ω, 1W	DO-214AC	1d	1t	Dac
A4762	-	SMA4762	Zener diode	82V±5%, Izt=3.0mA, Zzt<200Ω, 1W	DO-214AC	1d	1t	Dac
A4762A	-	SMA4762A	Zener diode	82V±10%, Izt=3.0mA, Zzt<200Ω, 1W	DO-214AC	1d	1t	Dac
A4763	-	SMA4763	Zener diode	91V±5%, Izt=2.8mA, Zzt<250Ω, 1W	DO-214AC	1d	1t	Dac
A4763A	-	SMA4763A	Zener diode	91V±10%, Izt=2.8mA, Zzt<250Ω, 1W	DO-214AC	1d	1t	Dac
A4764	-	SMA4764	Zener diode	100V±5%, Izt=2.5mA, Zzt<350Ω, 1W	DO-214AC	1d	1t	Dac
A4764A	-	SMA4764A	Zener diode	100V±10%, Izt=2.5mA, Zzt<350Ω, 1W	DO-214AC	1d	1t	Dac
A48A	-	SMA48A	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=5.17A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A48CA	-	SMA48CA	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=5.17A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A4A	-	P4SSMJ9.1A	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 31A, 400W(1ms)	DO-214AC	1d	1a	Chm
A4C	-	P4SSMJ9.1CA	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 31A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A5	-	1N4151W	Si-diode	Sw, Fast, 75V, 200mA, <2.5pF(0V), <4ns	SOD-323	5d	1a	Cen
A5	-	BAP51-03	PIN-diode	RF, 50V, 50mA, 500mW, 0.35pF, 5.5Ω(10mA/100MHz)	SOD-323	5d	1a	Phi
A5	-	BZX584B6V2	Zener diode	6.08..6.32V, Izt=5mA, Zzt=10Ω, 200mW	SOD-523FL	7d	1a	Tac
A5	-	EDZ27B	Zener diode	26.19..27.53V, Izt=2mA, Zzt=150Ω, 150mW	SOD-523	6d	1a	Rhm
A5	-	EDZV27B	Zener diode	26.19..27.53V, Izt=2.0mA, Zzt=150Ω, 150mW	SOD-523	6d	2v	Rhm
A5	-	FDZ27EV	Zener diode	26.190..27.530V, Izt=2mA, Zzt=150Ω, 150mW	SOD-523	6d	1a	Fis
A5	-	FDZ27VT	Zener diode	26.190..27.530V, Izt=5mA, Zzt=150Ω, 200mW	SOD-323	5d	1a	Fis
A5	-	FSS16	Si-diode	SBR, 60V, 1A, Vf<0.75V(1A)	DO-214AC	1d	2j	Fag
A5	-	HVC317B	C-diode	UHF-tuning, 30V, 0.6/9pF(25..1V/1MHz)	UFP	6d	1a	Ren
A5	-	LBZT52B27T1G	Zener diode	26.19..27.53V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
A5	-	LEDZ27BT1G	Zener diode	26.19..27.53V, Izt=2mA, 150mW	SOD-523	6d	1g	Lrc
A5	-	LUDZS27BT1G	Zener diode	26.19..27.53V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
A5	-	MM1Z5241B	Zener diode	10.45..11.50V, Izt=20mA, Zzt=22Ω, 500mW	SOD-323FL	7d	1a	Eic
A5	-	MM1Z5241BH	Zener diode	10.45..11.55V, Izt=20mA, Zzt=22Ω, 500mW	SOD-123	5d	1a	Zow
A5	-	MM5Z6V2B	Zener diode	6.08..6.32V, Izt=5mA, Zzt=10Ω, 200mW	SOD-523FL	7d	1a	Tac
A5	-	MMSZ15T	Zener diode	15V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1u	Mot
A5	-	MMSZ5241B	Zener diode	11V±5%, Izt=20mA, Zzt=22Ω, 500mW	SOD-123	5d	1a	Eic
A5	-	PTVS7V0S1UR	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, 33.3A, 400W (1ms)	SOD-123W	7d	1a	Nxp
A5	-	SM4005SPT	Si-diode	Rectifer, 600V, 1A	SOD-123S	7d	1a	Chm
A5	-	TDZ27B	Zener diode	27V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
A5	-	UDZS27B	Zener diode	26.19..27.53V, Izt=5mA, Zzt=150Ω, 200mW	SOD-323	5d	1a	Wtr
A5	-	UDZS27B	Zener diode	27V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
A5	-	UDZV27B	Zener diode	26.19..27.53V, Izt=5.0mA, Zzt=150Ω, 200mW	SOD-323	5d	2v	Rhm
A5	-	VDZS27B	Zener diode	27V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
A5.0A	-	SMA5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=43.50A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A5.0CA	-	SMA5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=43.50A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A51	-	DAM1MA51	ESDP-diode	Vdc=37V, Vzt=46.9..55.1V, Izt=6mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A51	-	DAM3MA51	ESDP-diode	Vdc=37V, Vzt=46.9..55.1V, Izt=20mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A51A	-	SMA51A	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=4.85A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A51CA	-	SMA51CA	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=4.85A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A54A	-	SMA54A	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=4.59A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A54CA	-	SMA54CA	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=4.59A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A58A	-	SMA58A	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=4.27A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A58CA	-	SMA58CA	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=4.27A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A5913A	-	SMA5913A	Zener diode	3.3V±3%, Izt=113.6mA, Zzt<10Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5913B	-	SMA5913B	Zener diode	3.3V±5%, Izt=113.6mA, Zzt<10Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5914A	-	SMA5914A	Zener diode	3.6V±3%, Izt=104.2mA, Zzt<9Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5914B	-	SMA5914B	Zener diode	3.6V±5%, Izt=104.2mA, Zzt<9Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5915A	-	SMA5915A	Zener diode	3.9V±3%, Izt=96.1mA, Zzt<7.5Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5915B	-	SMA5915B	Zener diode	3.9V±5%, Izt=96.1mA, Zzt<7.5Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5916A	-	SMA5916A	Zener diode	4.3V±3%, Izt=87.2mA, Zzt<6Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5916B	-	SMA5916B	Zener diode	4.3V±5%, Izt=87.2mA, Zzt<6Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5917A	-	SMA5917A	Zener diode	4.7V±3%, Izt=79.8mA, Zzt<5Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5917B	-	SMA5917B	Zener diode	4.7V±5%, Izt=79.8mA, Zzt<5Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5918A	-	SMA5918A	Zener diode	5.1V±3%, Izt=73.5mA, Zzt<4Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5918B	-	SMA5918B	Zener diode	5.1V±5%, Izt=73.5mA, Zzt<4Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5919A	-	SMA5919A	Zener diode	5.6V±3%, Izt=66.9mA, Zzt<2Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5919B	-	SMA5919B	Zener diode	5.6V±5%, Izt=66.9mA, Zzt<2Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5920A	-	SMA5920A	Zener diode	6.2V±3%, Izt=60.5mA, Zzt<2Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5920B	-	SMA5920B	Zener diode	6.2V±5%, Izt=60.5mA, Zzt<2Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5921A	-	SMA5921A	Zener diode	6.8V±3%, Izt=55.1mA, Zzt<2.5Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5921B	-	SMA5921B	Zener diode	6.8V±5%, Izt=55.1mA, Zzt<2.5Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5922A	-	SMA5922A	Zener diode	7.5V±3%, Izt=50mA, Zzt<3Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5922B	-	SMA5922B	Zener diode	7.5V±5%, Izt=50mA, Zzt<3Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5923A	-	SMA5923A	Zener diode	8.2V±3%, Izt=45.7mA, Zzt<3.5Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5923B	-	SMA5923B	Zener diode	8.2V±5%, Izt=45.7mA, Zzt<3.5Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5924A	-	SMA5924A	Zener diode	9.1V±3%, Izt=41.2mA, Zzt<4Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5924B	-	SMA5924B	Zener diode	9.1V±5%, Izt=41.2mA, Zzt<4Ω, 1.5W	DO-214AC	1d	1a	Dbp

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
A5925A	-	SMA5925A	Zener diode	10V±3%, Izt=37.5mA, Zzt<4.5Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5925B	-	SMA5925B	Zener diode	10V±5%, Izt=37.5mA, Zzt<4.5Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5926A	-	SMA5926A	Zener diode	11V±3%, Izt=34.1mA, Zzt<5.5Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5926B	-	SMA5926B	Zener diode	11V±5%, Izt=34.1mA, Zzt<5.5Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5927A	-	SMA5927A	Zener diode	12V±3%, Izt=31.2mA, Zzt<6.5Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5927B	-	SMA5927B	Zener diode	12V±5%, Izt=31.2mA, Zzt<6.5Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5928A	-	SMA5928A	Zener diode	13V±3%, Izt=28.8mA, Zzt<7Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5928B	-	SMA5928B	Zener diode	13V±5%, Izt=28.8mA, Zzt<7Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5929A	-	SMA5929A	Zener diode	15V±3%, Izt=25mA, Zzt<9Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5929B	-	SMA5929B	Zener diode	15V±5%, Izt=25mA, Zzt<9Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5930A	-	SMA5930A	Zener diode	16V±3%, Izt=23.4mA, Zzt<10Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5930B	-	SMA5930B	Zener diode	16V±5%, Izt=23.4mA, Zzt<10Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5931A	-	SMA5931A	Zener diode	18V±3%, Izt=20.8mA, Zzt<12Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5931B	-	SMA5931B	Zener diode	18V±5%, Izt=20.8mA, Zzt<12Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5932A	-	SMA5932A	Zener diode	20V±3%, Izt=18.7mA, Zzt<14Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5932B	-	SMA5932B	Zener diode	20V±5%, Izt=18.7mA, Zzt<14Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5933A	-	SMA5933A	Zener diode	22V±3%, Izt=17mA, Zzt<17.5Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5933B	-	SMA5933B	Zener diode	22V±5%, Izt=17mA, Zzt<17.5Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5934A	-	SMA5934A	Zener diode	24V±3%, Izt=15.6mA, Zzt<19Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5934B	-	SMA5934B	Zener diode	24V±5%, Izt=15.6mA, Zzt<19Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5935A	-	SMA5935A	Zener diode	27V±3%, Izt=13.9mA, Zzt<23Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5935B	-	SMA5935B	Zener diode	27V±5%, Izt=13.9mA, Zzt<23Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5936A	-	SMA5936A	Zener diode	30V±3%, Izt=12.5mA, Zzt<26Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5936B	-	SMA5936B	Zener diode	30V±5%, Izt=12.5mA, Zzt<26Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5937A	-	SMA5937A	Zener diode	33V±3%, Izt=11.4mA, Zzt<33Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5937B	-	SMA5937B	Zener diode	33V±5%, Izt=11.4mA, Zzt<33Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5938A	-	SMA5938A	Zener diode	36V±3%, Izt=10.4mA, Zzt<38Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5938B	-	SMA5938B	Zener diode	36V±5%, Izt=10.4mA, Zzt<38Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5939A	-	SMA5939A	Zener diode	39V±3%, Izt=9.6mA, Zzt<45Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5939B	-	SMA5939B	Zener diode	39V±5%, Izt=9.6mA, Zzt<45Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5940A	-	SMA5940A	Zener diode	43V±3%, Izt=8.7mA, Zzt<53Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5940B	-	SMA5940B	Zener diode	43V±5%, Izt=8.7mA, Zzt<53Ω, 1.5W	DO-214AC	1d	1a	Dbp
A5A	-	P4SSMJ10A	TVS	Vbr=9.5..10.5V, Vrwm=8.55V, 29A, 400W(1ms)	DO-214AC	1d	1a	Chm
A5C	-	P4SSMJ10CA	TVS	Vbr=9.5..10V, Vrwm=8.55V, 29A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A6	-	BAS16-02W	Si-diode	Sw, Fast, 80V, 200mA, 250mW, <6ns	SCD-80	6d	1u	Inf
A6	-	BAS16D	Si-diode	Sw, Fast, 75V, 200mA, 200mW, <6ns	SOD-123	5d	1a	Gse
A6	-	BAS16H	Si-diode	Sw, Fast, 75V, 200mA, 200mW, <6ns	SOD-323	5d	1a	Ons
A6	-	BAS16TS	Si-diode	Sw, Fast, 75V, 200mA, 200mW, <6ns	SOD-523	6d	1a	Pjt
A6	-	BAS16WS	Si-diode	Sw, Fast, 75V, 200mA, 200mW, <6ns	SOD-323	5d	1a	Gse
A6	-	BAS216	Si-diode	Sw, Fast, 75V, 250mA, 400mW, <4ns	SOD-110	12d	1a	Phi
A6	-	BAS316	Si-diode	Sw, Hi-Speed, 85V, 250mA, 400mW, 1.5pF, <4ns	SOD-323	5d	1a	Nxp
A6	-	BAV16WS	Si-diode	Sw, Fast, 100V, 300mA, <2pF, <2ns	SOD-323	5d	1a	Gse
A6	-	MM1Z5262B	Zener diode	48.45..53.55V, Izt=2.5mA, Zzt=125Ω, 500mW	SOD-323FL	7d	1a	Eic
A6	-	MM1Z5262BH	Zener diode	48.45..53.55V, Izt=2.5mA, Zzt=125Ω, 500mW	SOD-123	5d	1a	Zow
A6	-	MMSZ5262B	Zener diode	51V±5%, Izt=2.5mA, Zzt=125Ω, 500mW	SOD-123	5d	1a	Eic
A6	-	MSCD106	Si-diode	SBR, 60V, 1A, Vf<0.65V(1A)	0805	14d	1v	Zow
A6	-	PTVS7V5S1UR	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 31.0A, 400W (1ms)	SOD-123W	7d	1a	Nxp
A6	-	SM4006SPT	Si-diode	Rectifer, 800V, 1A	SOD-123S	7d	1a	Chm
A6	-	SSCD106	Si-diode	SBR, 60V, 1A, Vf<0.7V(1A)	1206	14d	1v	Zow
A6.0A	-	SMA6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=38.80A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A6.0CA	-	SMA6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=38.80A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A6.5A	-	SMA6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=35.70A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A6.5CA	-	SMA6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=35.70A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A60A	-	SMA60A	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=4.13A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A60CA	-	SMA60CA	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=4.13A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A64A	-	SMA64A	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=3.88A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A64CA	-	SMA64CA	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=3.88A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A68	-	DAM1MA68	ESDP-diode	Vdc=49V, Vzt=61.2..74.8V, Izt=4mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A68	-	DAM3MA68	ESDP-diode	Vdc=49V, Vzt=61.2..74.8V, Izt=10mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A6A	-	P4SSMJ11A	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 27A, 400W(1ms)	DO-214AC	1d	1a	Chm
A6C	-	P4SSMJ11CA	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 27A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A7	-	BAS321	Si-diode	GP, 250V, 250mA, 300mW, Vf<1.2V(200mA), 2pF, <50ns	SOD-323	5d	1a	Phi
A7	-	FSS19	Si-diode	SBR, 90V, 1A, Vf<0.8V(1A)	DO-214AC	1d	2j	Fag
A7	-	PTVS8V0S1UR	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 29.4A, 400W (1ms)	SOD-123W	7d	1a	Nxp
A7	-	RKV5000DKK	C-diode	TV-VCR-Tuners, 34V, C2=14.15..15.75pF, n>6.3, Rs<0.57Ω	SFP	6d	1a	Ren
A7	-	SM4007SPT	Si-diode	Rectifer, 1000V, 1A	SOD-123S	7d	1a	Chm
A7.0A	-	SMA7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=33.30A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A7.0CA	-	SMA7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=33.30A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A7.5A	-	SMA7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=31.0A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A7.5CA	-	SMA7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=31.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
A70A	-	SMA70A	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=3.54A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A70CA	-	SMA70CA	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=3.54A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A75	-	DAM1MA75	ESDP-diode	Vdc=54V, Vzt=67.5..82.5V, Izt=4mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A75	-	DAM3MA75	ESDP-diode	Vdc=54V, Vzt=67.5..82.5V, Izt=10mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A75A	-	SMA75A	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=3.31A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A75CA	-	SMA75CA	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=3.31A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A78A	-	SMA78A	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=3.17A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A78CA	-	SMA78CA	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=3.17A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A7A	-	P4SSMJ12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25A, 400W(1ms)	DO-214AC	1d	1a	Chm
A7C	-	P4SSMJ12CA	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A8	-	BAP50-03	PIN-diode	RF, 50V, 50mA, 500mW, 0.3pF, 3Ω(10mA/100MHz)	SOD-323	5d	1a	Phi
A8	-	BAV19W	Si-diode	Sw, 100V, 200mA, Vf<1.25V(200mA), <50ns	SOD-123	5d	1d	Di
A8	-	BAV19WS	Si-diode	Sw, 100V, 200mA, Vf<1.25V(200mA), <50ns	SOD-323	5d	1a	Di
A8	-	BZT52C2V7WT	Zener diode	2.57..2.84V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	6d	1a	Ttr
A8	-	FSS110	Si-diode	SBR, 100V, 1A, Vf<0.8V(1A)	DO-214AC	1d	2j	Fag
A8	-	MM5Z2V7	Zener diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	6d	1a	Eic
A8	-	MM5Z2V7H	Zener diode	2.5..2.9V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	6d	1a	Zow
A8	-	PTVS8V5S1UR	TVS	Vrwm=8.5V, Vbr=9.44..10.40V, 27.8A, 400W (1ms)	SOD-123W	7d	1a	Nxp
A8	-	RKV5010DKK	C-diode	TV-VCR-Tuners, 34V, C2=14.15..15.75pF, n>6.3, Rs<0.57Ω	SFP	6d	1a	Ren
A8.0A	-	SMA8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=29.40A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A8.0CA	-	SMA8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=29.40A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A8.5A	-	SMA8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.40V, Ipp=27.80A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A8.5CA	-	SMA8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.40V, Ipp=27.80A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A80A	-	SMA80A	TVS	Vrwm=80.0V, Vbr=88.80..97.60V, Ipp=3.09A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A80CA	-	SMA80CA	TVS	Vrwm=80.0V, Vbr=88.80..97.60V, Ipp=3.09A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A82	-	DAM1MA82	ESDP-diode	Vdc=59V, Vzt=73.8..90.2V, Izt=3mA, 600W(100?s)	DWG4A	1d	1kc	Hit
A82	-	DAM3MA82	ESDP-diode	Vdc=59V, Vzt=73.8..90.2V, Izt=10mA, 1800W(100?s)	DWG4B	1d	1kc	Hit
A85A	-	SMA85A	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=2.92A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A85CA	-	SMA85CA	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=2.92A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A8A	-	P4SSMJ13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23A, 400W(1ms)	DO-214AC	1d	1a	Chm
A8C	-	P4SSMJ13CA	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
A9	-	BAP70-03	PIN-diode	RF, 50V, 100mA, 500mW, 0.57pF, 1.9Ω(100mA/100MHz)	SOD-323	5d	1a	Nxp
A9	-	BAV20W	Si-diode	Sw, 150V, 200mA, Vf<1.25V(200mA), <50ns	SOD-123	5d	1a	Cen
A9	-	BZT52C33WT	Zener diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Ttr
A9	-	FSS115	Si-diode	SBR, 150V, 1A, Vf<0.8V(1A)	DO-214AC	1d	2j	Fag
A9	-	MM5Z33H	Zener diode	31..35V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Zow
A9	-	MM5Z33V	Zener diode	33V±5%, Izt=2mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Eic
A9	-	PTVS9V0S1UR	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, 26.0A, 400W (1ms)	SOD-123W	7d	1a	Nxp
A9	-	RKV5020DKK	Si-diode	HF, Sw, 35V, Vf<1V(10mA), <1.2pF, Rf<0.7Ω	SFP	6d	1a	Ren
A9.0A	-	SMA9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=26.0A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A9.0CA	-	SMA9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=26.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A90A	-	SMA90A	TVS	Vrwm=90V, Vbr=100.0..111.0V, Ipp=2.74A, 400W(1ms)	DO-214AC	1d	1a	Ctc
A90CA	-	SMA90CA	TVS	Vrwm=90V, Vbr=100.0..111.0V, Ipp=2.74A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Ctc
A9A	-	P4SSMJ15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20A, 400W(1ms)	DO-214AC	1d	1a	Chm
A9C	-	P4SSMJ15CA	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Chm
AA	-	BA892	PIN-diode	VHF, TV-Band-Sw, 35V, 0.1A, Vf<1V(100mA), 1.4pF, <120ns	SCD-80	6d	1u	Inf
AA	-	BAV21W	Si-diode	Sw, 200V, 200mA, Vf<1.25V(200mA), <50ns	SOD-123	5d	1a	Cen
AA	-	ESDA3L03	TVS	Vrwm=3.3V, Vbr=4.75..5.25V, Ipp=20.0A, 350w(20µs)	SOD-323FL	7d	1a	Frm
AA	-	MA5Z200-L	Zener diode	200V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AA	-	MAZU200-L	Zener diode	190..210V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AA	-	PTVS10VS1UR	TVS	Vrwm=10V, Vbr=11.10..12.30V, 23.5A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AA	-	SMAJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 43.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
AA	-	ZMV829A	C-diode	VHF/UHF-tuning, 25V, 330mW, 8.2pF(2V), ΔC=±10%	SOD-323	5d	1a	Zx
AAA	-	FUF3A	Si-diode	U-fast Rec. Rect., 50V, 3A, Vf<1.3V(3A), 50ns	DO-214AB	1d	2jb	Fag
AAB	-	FUF3B	Si-diode	U-fast Rec. Rect., 100V, 3A, Vf<1.3V(3A), 50ns	DO-214AB	1d	2jb	Fag
AAD	-	FUF3D	Si-diode	U-fast Rec. Rect., 200V, 3A, Vf<1.3V(3A), 50ns	DO-214AB	1d	2jb	Fag
AAD	-	SMAJ5.0	TVS	Vbr=6.40..7.81V, Vrwm=5.0V, 41.7A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAE	-	SMAJ5.0A	TVS	Vbr=6.40..7.08V, Vrwm=5.0V, 43.5A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAF	-	SMAJ6.0	TVS	Vbr=6.67..8.15V, Vrwm=6.0V, 35.1A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAG	-	FUF3G	Si-diode	U-fast Rec. Rect., 400V, 3A, Vf<1.3V(3A), 50ns	DO-214AB	1d	2jb	Fag
AAG	-	SMAJ6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 38.8A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAH	-	SMAJ6.5	TVS	Vbr=7.22..8.82V, Vrwm=6.5V, 32.5A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAJ	-	FUF3J	Si-diode	U-fast Rec. Rect., 600V, 3A, Vf<1.7V(3A), 75ns	DO-214AB	1d	2jb	Fag
AAK	-	FUF3K	Si-diode	U-fast Rec. Rect., 800V, 3A, Vf<1.7V(3A), 75ns	DO-214AB	1d	2jb	Fag
AAK	-	SMAJ6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 35.7A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAL	-	SMAJ7.0	TVS	Vbr=7.78..9.51V, Vrwm=7.0V, 30.1A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAM	-	FUF3M	Si-diode	U-fast Rec. Rect., 1000V, 3A, Vf<1.7V(3A), 75ns	DO-214AB	1d	2jb	Fag
AAM	-	SMAJ7.0A	TVS	Vbr=7.78..8.60V, Vrwm=7.0V, 33.3A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAN	-	SMAJ7.5	TVS	Vbr=8.33..10.3V, Vrwm=7.5V, 28.0A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAP	-	SMAJ7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 31.0A, 400W(1ms)	DO-214AC	1d	1a	Gal

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
AAQ	-	SMAJ8.0	TVS	Vbr=8.89..10.9V, Vrwm=8.0V, 26.7A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAR	-	SMAJ8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 29.4A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAS	-	SMAJ8.5	TVS	Vbr=9.44..11.5V, Vrwm=8.5V, 25.2A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAT	-	SMAJ8.5A	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 27.8A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAU	-	SMAJ9.0	TVS	Vbr=10.0..12.2V, Vrwm=9.0V, 23.7A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAV	-	SMAJ9.0A	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 26.0A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAW	-	SMAJ10	TVS	Vbr=11.1..13.6V, Vrwm=10V, 21.3A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAX	-	SMAJ10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, 23.5A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAY	-	SMAJ11	TVS	Vbr=12.2..14.9V, Vrwm=11V, 19.9A, 400W(1ms)	DO-214AC	1d	1a	Gal
AAZ	-	SMAJ11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, 22.0A, 400W(1ms)	DO-214AC	1d	1a	Gal
AB	-	ESDA3L05	TVS	Vrwm=5.0V, Vbr=7.03..7.77V, Ipp=17.0A, 350w(20µs)	SOD-323FL	7d	1a	Frm
AB	-	FSSH210	Si-diode	SBR, 110V, 2A, Vf<0.79V(2A)	DO-214AA	1d	2j	Fag
AB	-	MA5Z200-H	Zener diode	200V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AB	-	MAZU200-H	Zener diode	190..210V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AB	-	MM1Z5222B	Zener diode	2.5V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Bts
AB	-	MMSZ5222B	Zener diode	2.5V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Eic
AB	-	PTVS11VS1UR	TVS	Vrwm=11V, Vbr=12.20..13.50V, 22.0A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AB	-	ZMV830A	C-diode	VHF/UHF-tuning, 25V, 330mW, 10pF(2V), ΔC=±10%	SOD-323	5d	1a	Zx
ABA	-	FS4A	Si-diode	Rectifier, 50V, 4A, Vf<1.15V(4A), 60pF	DO-214AB	1d	2j	Fag
ABB	-	FS4B	Si-diode	Rectifier, 100V, 4A, Vf<1.15V(4A), 60pF	DO-214AB	1d	2j	Fag
ABC	-	FS4D	Si-diode	Rectifier, 200V, 4A, Vf<1.15V(4A), 60pF	DO-214AB	1d	2j	Fag
ABD	-	FS4G	Si-diode	Rectifier, 400V, 4A, Vf<1.15V(4A), 60pF	DO-214AB	1d	2j	Fag
ABD	-	SMAJ12	TVS	Vbr=13.3..16.3V, Vrwm=12V, 18.2A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABE	-	FS4J	Si-diode	Rectifier, 600V, 4A, Vf<1.15V(4A), 60pF	DO-214AB	1d	2j	Fag
ABE	-	SMAJ12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, 20.1A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABF	-	FS4K	Si-diode	Rectifier, 800V, 4A, Vf<1.15V(4A), 60pF	DO-214AB	1d	2j	Fag
ABF	-	SMAJ13	TVS	Vbr=14.4..17.6V, Vrwm=13V, 16.8A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABG	-	FS4M	Si-diode	Rectifier, 1000V, 4A, Vf<1.15V(4A), 60pF	DO-214AB	1d	2j	Fag
ABG	-	SMAJ13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, 18.6A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABH	-	SMAJ14	TVS	Vbr=15.6..19.1V, Vrwm=14V, 15.5A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABK	-	SMAJ14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, 17.2A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABL	-	SMAJ15	TVS	Vbr=16.7..20.4V, Vrwm=15V, 14.9A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABM	-	SMAJ15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, 16.4A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABN	-	SMAJ16	TVS	Vbr=17.8..21.8V, Vrwm=16V, 13.9A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABP	-	SMAJ16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, 15.4A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABQ	-	SMAJ17	TVS	Vbr=18.9..23.1V, Vrwm=17V, 13.1A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABR	-	SMAJ17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, 14.5A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABS	-	SMAJ18	TVS	Vbr=20.0..24.4V, Vrwm=18V, 12.4A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABT	-	SMAJ18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, 13.7A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABU	-	SMAJ20	TVS	Vbr=22.2..27.1V, Vrwm=20V, 11.2A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABV	-	SMAJ20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, 12.3A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABW	-	SMAJ22	TVS	Vbr=24.4..29.8V, Vrwm=22V, 10.2A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABX	-	SMAJ22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, 11.3A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABY	-	SMAJ24	TVS	Vbr=26.7..32.6V, Vrwm=24V, 9.3A, 400W(1ms)	DO-214AC	1d	1a	Gal
ABZ	-	SMAJ24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, 10.3A, 400W(1ms)	DO-214AC	1d	1a	Gal
AC	-	BAS70SL	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOD-723	7d	1a	F
AC	-	ESDA3L08	TVS	Vrwm=8.0V, Vbr=8.93..9.87V, Ipp=17.0A, 350w(20µs)	SOD-323FL	7d	1a	Frm
AC	-	GBLC05CI	TVS	Vrwm=5V, 5A, 350W(1ms), 0.6pF, Bidir.	SOD-323	5ba	1e	Prt
AC	-	MA5Z220-L	Zener diode	220V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AC	-	MAZU220-L	Zener diode	210..230V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AC	-	MM1Z5224B	Zener diode	2.8V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Bts
AC	-	MMSZ5224B	Zener diode	2.8V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Eic
AC	-	PTVS12VS1UR	TVS	Vrwm=12V, Vbr=13.30..14.70V, 20.1A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AC	-	SMAJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.3V, 21.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
AC	-	SMAJ26	TVS	Vbr=28.9..35.3V, Vrwm=26V, 8.6A, 400W(1ms)	DO-214AC	1d	1a	Gal
AC	-	SMP3V3	TVS	Vbr=4.10..5.10V, Vrwm=3.3V, Ipp=54.8A, 400W(1ms)	DO-220AA	8d	1a	Vs
AC	-	TV04A4V0J-G	TVS	Vrvm=4.0V, Vbr=5.89..6.51V, Ipp=46.50A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AC	-	ZMV831A	C-diode	VHF/UHF-tuning, 25V, 330mW, 15pF(2V), ΔC=±10%	SOD-323	5d	1a	Zx
ACE	-	SMAJ26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, 9.5A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACF	-	SMAJ28	TVS	Vbr=31.1..38.0V, Vrwm=28V, 8.0A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACG	-	SMAJ28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, 8.8A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACH	-	SMAJ30	TVS	Vbr=33.3..40.7V, Vrwm=30V, 7.5A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACK	-	SMAJ30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, 8.3A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACL	-	SMAJ33	TVS	Vbr=36.7..44.9V, Vrwm=33V, 5.1A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACM	-	SMAJ33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, 5.6A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACN	-	SMAJ36	TVS	Vbr=40.0..48.9V, Vrwm=36V, 4.7A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACP	-	SMAJ36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, 5.2A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACQ	-	SMAJ40	TVS	Vbr=44.4..54.3V, Vrwm=40V, 4.2A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACR	-	SMAJ40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, 4.7A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACS	-	SMAJ43	TVS	Vbr=47.8..58.4V, Vrwm=43V, 3.9A, 400W(1ms)	DO-214AC	1d	1a	Gal

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
ACT	-	SMAJ43A	TVS	Vbr=47.8..52.8V, Vrwm=43V, 4.3A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACU	-	SMAJ45	TVS	Vbr=50.0..61.1V, Vrwm=45V, 3.7A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACV	-	SMAJ45A	TVS	Vbr=50.0..55.3V, Vrwm=45V, 4.1A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACW	-	SMAJ48	TVS	Vbr=53.3..65.1V, Vrwm=48V, 3.5A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACX	-	SMAJ48A	TVS	Vbr=53.3..58.9V, Vrwm=48V, 3.9A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACY	-	SMAJ51	TVS	Vbr=56.7..69.3V, Vrwm=51V, 3.3A, 400W(1ms)	DO-214AC	1d	1a	Gal
ACZ	-	SMAJ51A	TVS	Vbr=56.7..62.7V, Vrwm=51V, 3.6A, 400W(1ms)	DO-214AC	1d	1a	Gal
AD	-	KDZ20B	Zener diode	20V±2.5%, 20mA, 1W	PMDU	7d	1s	Rhm
AD	-	MA5Z220-H	Zener diode	220V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AD	-	MAZU220-H	Zener diode	220..240V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AD	-	MM1Z5233B	Zener diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123FL	7d	1a	Bts
AD	-	MMSZ5233B	Zener diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123	5d	1a	Eic
AD	-	P4SMA6V8	TVS	Vbr=6.45..7.14V, Vrwm=6.8V, 38.1A, 400W (1ms)	DO-214AC	1d	2j	Fag
AD	-	P4SMAJ5.0	TVS	Vrwm=5V, 41.6A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AD	-	P6SMBJ5.0C	TVS	Vrwm=5V, Vbr=6.4..7.55V, 62.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AD	-	PTVS13VS1UR	TVS	Vrwm=13V, Vbr=14.40..15.90V, 18.6A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AD	-	SMAJ5.0	TVS	Vrwm=5.0V, Vbr=6.40..7.82V, 41.7A, 400W(1ms)	DO-214AC	1d	1k	Vs
AD	-	SMBG5.0C	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AD	-	SMBJ5.0C	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AD	-	TV04A5V0K-G	TVS	Vrwm=5.0V, Vbr=6.40..7.30V, Ipp=41.67A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AD	-	TV06B5V0KB-G	TVS	Vrwm=5.0V, Vbr=6.40..7.30V, Ipp=62.50A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
AD	-	ZMV832A	C-diode	VHF/UHF-tuning, 25V, 330mW, 22pF(2V), ΔC=±10%	SOD-323	5d	1a	Zx
ADJ	-	P4SMA6.8	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 38.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
ADK	-	SMA6.8	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 37.0A, 400W(1ms)	DO-214AC	1d	1a	Lge
ADM	-	SMA6.8C	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 37.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
ADP	-	SMAJ5.0C	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 41.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
ADP	-	TPSMA6.8	TVS	Vrwm=6.8V, Ipp=37A, 400W (1ms)	DO-214AC	1d	1k	Vs
ADP	-	TPSMP6.8	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, Ipp=23.2A, 250W(1ms)	DO-220AA	8d	1a	Vs
AE	-	CD214B-T5.0CA	TVS	Vrwm=5.0V, Irsm=65.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
AE	-	MA5Z240-L	Zener diode	240V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AE	-	MAZU240-L	Zener diode	230..250V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AE	-	MM1Z5238B	Zener diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123FL	7d	1a	Bts
AE	-	MMSZ5238B	Zener diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123	5d	1a	Eic
AE	-	P4SMA6V8A	TVS	Vbr=6.45..7.14V, Vrwm=6.8V, 38.1A, 400W (1ms)	DO-214AC	1d	2j	Fag
AE	-	P4SMAJ5.0A	TVS	Vrwm=5V, 43.5A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AE	-	P6SMBJ5.0CA	TVS	Vrwm=5V, Vbr=6.4..7.55V, 65.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AE	-	PMF5.0A	TVS	Vbr=6.40..7.0V, Vrwm=5.0V, Ipp=21.7A, 200W(1ms)	SOD-123FL	7d	1a	Shp
AE	-	PTVS14VS1UR	TVS	Vrwm=14V, Vbr=15.60..17.20V, 17.2A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AE	-	SMA6L5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 65.3A, 600W(1ms)	DO-221AC	7d	2s	Lif
AE	-	SMAJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 43.5A, 400W(1ms)	DO-214AC	1d	1q	Ste
AE	-	SMAJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 43.5A, 400W(1ms)	DO-214AC	1d	1k	Vs
AE	-	SMBG5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AE	-	SMBJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
AE	-	SMBJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AE	-	SMF5.0A	TVS	Vbr=6.4..7.0V, Vrwm=5.0V, Ipp=21.7A, 200W(1ms)	SMF	1d	2sa	Lif
AE	-	SMF5V0A	ESDP-diode	Vbr=6.4V, Vrwm=5V, Ipp=21.7A, 200W(1ms)	SMF	7d	2y	Vs
AE	-	SMP5.0A	TVS	Vbr=6.40..7.07V, Vrwm=5.0V, Ipp=43.5A, 400W(1ms)	DO-220AA	8d	1a	Vs
AE	-	TV04A5V0J-G	TVS	Vrwm=5.0V, Vbr=6.46..7.0V, Ipp=43.48A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AE	-	TV06B5V0JB-G	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=65.22A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
AE	-	ZMV833A	C-diode	VHF/UHF-tuning, 25V, 330mW, 33pF(2V), ΔC=±10%	SOD-323	5d	1a	Zx
AEA	-	TPSMA6L5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=65.3A, 600W(1ms)	DO-221AC	1d	2s	Lif
AEJ	-	P4SMA6.8A	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 40.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
AEK	-	SMA6.8A	TVS	Vbr=6.45..7.13V, Vrwm=5.80V, 38.1A, 400W(1ms)	DO-214AC	1d	1a	Lge
AEM	-	SMA6.8CA	TVS	Vbr=6.45..7.13V, Vrwm=5.80V, 38.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
AEP	-	SMAJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 43.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
AEP	-	TPSMA6.8A	TVS	Vrwm=6.8V, Ipp=38.1A, 400W (1ms)	DO-214AC	1d	1k	Vs
AEP	-	TPSMP6.8A	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, Ipp=23.8A, 250W(1ms)	DO-220AA	8d	1a	Vs
AF	-	KDZ33FV	Zener diode	31.0..35.0V, Izt=2mA, Zzt=250Ω, 100mW	TFSC	7d	1a	Kec
AF	-	MA5Z240-M	Zener diode	240V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AF	-	MAZD043	Zener diode	4..4.6V, Zzt=130Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
AF	-	MAZU240-M	Zener diode	240..260V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AF	-	MM1Z5244B	Zener diode	14V±5%, Izt=9.0mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Bts
AF	-	MMSZ5244B	Zener diode	14V±5%, Izt=9mA, Zzt=15Ω, 500mW	SOD-123	5d	1a	Eic
AF	-	P4SMA7V5	TVS	Vbr=7.13..7.88V, Vrwm=7.5V, 35.4A, 400W (1ms)	DO-214AC	1d	2j	Fag
AF	-	P4SMAJ6.0	TVS	Vrwm=6V, 35.1A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AF	-	P6SMBJ6.0C	TVS	Vrwm=6V, Vbr=6.67..8.65V, 52.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AF	-	PTVS15VS1UR	TVS	Vrwm=15V, Vbr=16.70..18.50V, 16.4A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AF	-	SMAJ6.0	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, 35.1A, 400W(1ms)	DO-214AC	1d	1k	Vs
AF	-	SMBG6.0C	TVS	Vrwm=6.0V, Vbr=6.67..8.45V, 52.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AF	-	SMBJ6.0C	TVS	Vrwm=6.0V, Vbr=6.67..8.45V, 52.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
AF	-	TV04A6V0K-G	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, Ipp=35.09A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AF	-	TV06B6V0KB-G	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, Ipp=52.63A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
AF	-	ZMV834A	C-diode	VHF/UHF-tuning, 25V, 330mW, 47pF(2V), ΔC=±10%	SOD-323	5d	1a	Zx
AFJ	-	P4SMA7.5	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 36.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
AFK	-	SMA7.5	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 34.2A, 400W(1ms)	DO-214AC	1d	1a	Lge
AFM	-	SMA7.5C	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 34.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
AFP	-	SMAJ6.0C	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, 35.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
AFP	-	TPSMA7.5	TVS	Vrwm=7.5V, Ipp=34.2A, 400W (1ms)	DO-214AC	1d	1k	Vs
AFP	-	TPSMP7.5	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, Ipp=25.6A, 300W(1ms)	DO-220AA	8d	1a	Vs
AG	-	CD214B-T6.0CA	TVS	Vrwm=6.0V, Irsm=58.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
AG	-	MSMP6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, Ipp=73.0A, 150W (1ms)	MicroSMP	8d	1k	Vs
AG	-	P4SMA7V5A	TVS	Vbr=7.13..7.88V, Vrwm=7.5V, 35.4A, 400W (1ms)	DO-214AC	1d	2j	Fag
AG	-	P4SMAJ6.0A	TVS	Vrwm=6V, 38.8A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AG	-	P6SMBJ6.0CA	TVS	Vrwm=6V, Vbr=6.67..8.65V, 58.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AG	-	PMF6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, Ipp=19.4A, 200W(1ms)	SOD-123FL	7d	1a	Shp
AG	-	PTVS16VS1UR	TVS	Vrwm=16V, Vbr=17.80..19.70V, 15.4A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AG	-	SMA6L6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 58.3A, 600W(1ms)	DO-221AC	7d	2s	Lif
AG	-	SMAJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 38.8A, 400W(1ms)	DO-214AC	1d	1k	Vs
AG	-	SMBG6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, 58.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AG	-	SMBJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, 58.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AG	-	SMBJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, 58.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
AG	-	SMF6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, Ipp=19.4A, 200W(1ms)	SMF	1d	2sa	Lif
AG	-	SMF6V0A	ESDP-diode	Vbr=6.67V, Vrwm=6V, Ipp=19.4A, 200W(1ms)	SMF	7d	2y	Vs
AG	-	SMP6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, Ipp=38.8A, 400W(1ms)	DO-220AA	8d	1a	Vs
AG	-	TV04A6V0J-G	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=38.83A , 400W(1ms)	DO-214AC	1d	2o	Cmc
AG	-	TV06B6V0JB-G	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=58.25A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
AG	-	ZMV835A	C-diode	VHF/UHF-tuning, 25V, 330mW, 68pF(2V), ΔC=±10%	SOD-323	5d	1a	Zx
AGA	-	TPSMA6L6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=58.3A, 600W(1ms)	DO-221AC	1d	2s	Lif
AGJ	-	P4SMA7.5A	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 37.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
AGK	-	SMA7.5A	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 35.4A, 400W(1ms)	DO-214AC	1d	1a	Lge
AGM	-	SMA7.5CA	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 35.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
AGP	-	SMAJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 38.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
AGP	-	TPSMA7.5A	TVS	Vrwm=7.5V, Ipp=35.4A, 400W (1ms)	DO-214AC	1d	1k	Vs
AGP	-	TPSMP7.5A	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, Ipp=26.5A, 300W(1ms)	DO-220AA	8d	1a	Vs
AH	-	BAS70H	Si-diode	SBD, GP, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOD-123F	6d	1a	Nxp
AH	-	MA5Z240-H	Zener diode	240V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AH	-	MAZU240-H	Zener diode	250..270V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AH	-	MM1Z5247B	Zener diode	17V±5%, Izt=7.4mA, Zzt=19Ω, 500mW	SOD-123FL	7d	1a	Bts
AH	-	MMSZ5247B	Zener diode	17V±5%, Izt=7.4mA, Zzt=19Ω, 500mW	SOD-123	5d	1a	Eic
AH	-	P4SMA8V2	TVS	Vbr=7.79..8.61V, Vrwm=8.2V, 33.1A, 400W (1ms)	DO-214AC	1d	2j	Fag
AH	-	P4SMAJ6.5	TVS	Vrwm=6.5V, 32.5A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AH	-	P6SMBJ6.5C	TVS	Vrwm=6.5V, Vbr=7.22..9.14V, 48.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AH	-	PTVS17VS1UR	TVS	Vrwm=17V, Vbr=18.90..20.90V, 14.5A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AH	-	SMAJ6.5	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, 32.5A, 400W(1ms)	DO-214AC	1d	1k	Vs
AH	-	SMBG6.5C	TVS	Vrwm=6.5V, Vbr=7.22..9.14V, 48.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AH	-	SMBJ6.5C	TVS	Vrwm=6.5V, Vbr=7.22..9.14V, 48.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AH	-	TV04A6V5K-G	TVS	Vrwm=6.50V, Vbr=7.22..8.82V, Ipp=32.52A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AH	-	TV06B6V5KB-G	TVS	Vrwm=6.50V, Vbr=7.22..8.82V, Ipp=48.78A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
AH	-	ZMV930TA	C-diode	VHF-tuning, 12V, 4.3/5.5pF(2.5V)	SOD-323	5d	1a	Zx
AHJ	-	P4SMA8.2	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 33.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
AHK	-	SMA8.2	TVS	Vbr=7.38..9.0V, Vrwm=6.63V, 32.0A, 400W(1ms),	DO-214AC	1d	1a	Lge
AHM	-	SMA8.2C	TVS	Vbr=7.38..9.0V, Vrwm=6.63V, 32.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
AHP	-	SMAJ6.5C	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, 32.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
AHP	-	TPSMA8.2	TVS	Vrwm=8.2V, Ipp=32A, 400W (1ms)	DO-214AC	1d	1k	Vs
AHP	-	TPSMP8.2	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, Ipp=24.0A, 300W(1ms)	DO-220AA	8d	1a	Vs
AI	-	FSSH110B	Si-diode	SBR, 110V, 1A, Vf<0.8V(1A)	DO-214AA	1d	2j	Fag
AI	-	MA5Z270-L	Zener diode	270V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AI	-	MAZU270-L	Zener diode	270..280V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AJ	-	BAS40H	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOD-123F	6d	1a	Nxp
AJ	-	ESDA3L12	TVS	Vrwm=12V, Vbr=13.97..15.44V, Ipp=11.0A, 350w(20µs)	SOD-323FL	7d	1a	Frm
AJ	-	MM1Z5255B	Zener diode	28V±5%, Izt=4.5mA, Zzt=44Ω, 500mW	SOD-123FL	7d	1a	Bts
AJ	-	MMSZ5255B	Zener diode	29V±5%, Izt=4.5mA, Zzt=44Ω, 500mW	SOD-123	5d	1a	Eic
AJ	-	SMAJ15CA	TVS	Vrwm=15V, Vbr=16.7..18.5V, 16.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
AJ	-	ZMV931TA	C-diode	VHF-tuning, 12V, 6.5/7.8pF(2.5V)	SOD-323	5d	1a	Zx
AJ05A	-	SMAJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 43.5A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ05A	-	SMAJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 43.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ06A	-	SMAJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 38.8A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ06A	-	SMAJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 38.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ07A	-	SMAJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, 33.3A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ07A	-	SMAJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, 33.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
AJ08A	-	SMAJ8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 29.4A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ08A	-	SMAJ8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 29.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ09A	-	SMAJ9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, 26.0A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ09A	-	SMAJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, 26.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ100A	-	SMAJ100A	TVS	Vrwm=100V, Vbr=111..123V, 2.5A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ100A	-	SMAJ100CA	TVS	Vrwm=100V, Vbr=111..123V, 2.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ10A	-	SMAJ10A	TVS	Vrwm=10V, Vbr=11.1..12.3V, 23.5A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ10A	-	SMAJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.3V, 23.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ110A	-	SMAJ110A	TVS	Vrwm=110V, Vbr=122..135V, 2.3A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ110A	-	SMAJ110CA	TVS	Vrwm=110V, Vbr=122..135V, 2.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ11A	-	SMAJ11A	TVS	Vrwm=11V, Vbr=12.2..13.5V, 22A, 400W(1ms)	DO-214AC	1d	1j	Sec
AJ11A	-	SMAJ11CA	TVS	Vrwm=11V, Vbr=12.2..13.5V, 22A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ120A	-	SMAJ120A	TVS	Vrwm=120V, Vbr=133..147V, 2.0A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ120A	-	SMAJ120CA	TVS	Vrwm=120V, Vbr=133..147V, 2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ12A	-	SMAJ12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, 20.1A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ12A	-	SMAJ12CA	TVS	Vrwm=12V, Vbr=13.3..14.7V, 20.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ130A	-	SMAJ130A	TVS	Vrwm=130V, Vbr=144..159V, 1.9A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ130A	-	SMAJ130CA	TVS	Vrwm=130V, Vbr=144..159V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ13A	-	SMAJ13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, 18.6A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ13A	-	SMAJ13CA	TVS	Vrwm=13V, Vbr=14.4..15.9V, 18.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ14A	-	SMAJ14A	TVS	Vrwm=14V, Vbr=15.6..17.2V, 17.2A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ14A	-	SMAJ14CA	TVS	Vrwm=14V, Vbr=15.6..17.2V, 17.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ150A	-	SMAJ150A	TVS	Vrwm=150V, Vbr=167..185V, 1.6A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ150A	-	SMAJ150CA	TVS	Vrwm=150V, Vbr=167..185V, 1.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ15A	-	SMAJ15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, 16.4A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ15A	-	SMAJ15CA	TVS	Vrwm=15V, Vbr=16.7..18.5V, 16.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ160A	-	SMAJ160A	TVS	Vrwm=160V, Vbr=178..197V, 1.5A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ160A	-	SMAJ160CA	TVS	Vrwm=160V, Vbr=178..197V, 1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ16A	-	SMAJ16A	TVS	Vrwm=16V, Vbr=17.8..19.7V, 15.3A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ16A	-	SMAJ16CA	TVS	Vrwm=16V, Vbr=17.8..19.7V, 15.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ170A	-	SMAJ170A	TVS	Vrwm=170V, Vbr=189..209V, 1.5A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ170A	-	SMAJ170CA	TVS	Vrwm=170V, Vbr=189..209V, 1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ17A	-	SMAJ17A	TVS	Vrwm=17V, Vbr=18.9..20.9V, 14.5A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ17A	-	SMAJ17CA	TVS	Vrwm=17V, Vbr=18.9..20.9V, 14.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ180A	-	SMAJ180A	TVS	Vrwm=180V, Vbr=200..220V, 1.4A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ180A	-	SMAJ180CA	TVS	Vrwm=180V, Vbr=200..220V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ18A	-	SMAJ18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, 13.7A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ18A	-	SMAJ18CA	TVS	Vrwm=18V, Vbr=20.0..22.1V, 13.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ190A	-	SMAJ190A	TVS	Vrwm=190V, Vbr=211..232V, 1.3A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ190A	-	SMAJ190CA	TVS	Vrwm=190V, Vbr=211..232V, 1.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ200A	-	SMAJ200A	TVS	Vrwm=200V, Vbr=224..247V, 1.2A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ200A	-	SMAJ200CA	TVS	Vrwm=200V, Vbr=224..247V, 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ20A	-	SMAJ20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, 12.3A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ20A	-	SMAJ20CA	TVS	Vrwm=20V, Vbr=22.2..24.5V, 12.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ220A	-	SMAJ220A	TVS	Vrwm=220V, Vbr=246..272V, 1.1A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ220A	-	SMAJ220CA	TVS	Vrwm=220V, Vbr=246..272V, 1.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ22A	-	SMAJ22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, 11.2A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ22A	-	SMAJ22CA	TVS	Vrwm=22V, Vbr=24.4..26.9V, 11.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ24A	-	SMAJ24A	TVS	Vrwm=24V, Vbr=26.7..29.5V, 10.3A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ24A	-	SMAJ24CA	TVS	Vrwm=24V, Vbr=26.7..29.5V, 10.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ250A	-	SMAJ250A	TVS	Vrwm=250V, Vbr=279..309V, 1.0A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ250A	-	SMAJ250CA	TVS	Vrwm=250V, Vbr=279..309V, 1.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ26A	-	SMAJ26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, 9.5A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ26A	-	SMAJ26CA	TVS	Vrwm=26V, Vbr=28.9..31.9V, 9.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ28A	-	SMAJ28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, 8.8A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ28A	-	SMAJ28CA	TVS	Vrwm=28V, Vbr=31.1..34.4V, 8.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ300A	-	SMAJ300A	TVS	Vrwm=300V, Vbr=335..371V, 0.8A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ300A	-	SMAJ300CA	TVS	Vrwm=300V, Vbr=335..371V, 0.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ30A	-	SMAJ30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, 8.3A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ30A	-	SMAJ30CA	TVS	Vrwm=30V, Vbr=33.3..36.8V, 8.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ33A	-	SMAJ33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, 7.5A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ33A	-	SMAJ33CA	TVS	Vrwm=33V, Vbr=36.7..40.6V, 7.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ350A	-	SMAJ350A	TVS	Vrwm=350V, Vbr=391..432V, 0.7A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ350A	-	SMAJ350CA	TVS	Vrwm=350V, Vbr=391..432V, 0.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ36A	-	SMAJ36A	TVS	Vrwm=36V, Vbr=40.0..44.2V, 6.9A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ36A	-	SMAJ36CA	TVS	Vrwm=36V, Vbr=40.0..44.2V, 6.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ400A	-	SMAJ400A	TVS	Vrwm=400V, Vbr=447..494V, 0.6A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ400A	-	SMAJ400CA	TVS	Vrwm=400V, Vbr=447..494V, 0.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ40A	-	SMAJ40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, 6.2A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ40A	-	SMAJ40CA	TVS	Vrwm=40V, Vbr=44.4..49.1V, 6.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
AJ43A	-	SMAJ43A	TVS	Vrwm=43V, Vbr=47.8..52.8V, 5.7A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ43A	-	SMAJ43CA	TVS	Vrwm=43V, Vbr=47.8..52.8V, 5.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ440A	-	SMAJ440A	TVS	Vrwm=440V, Vbr=492..543V, 0.6A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ440A	-	SMAJ440CA	TVS	Vrwm=440V, Vbr=492..543V, 0.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ45A	-	SMAJ45A	TVS	Vrwm=45V, Vbr=50.0..55.3V, 5.5A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ45A	-	SMAJ45CA	TVS	Vrwm=45V, Vbr=50.0..55.3V, 5.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ48A	-	SMAJ48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, 5.2A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ48A	-	SMAJ48CA	TVS	Vrwm=48V, Vbr=53.3..58.9V, 5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ51A	-	SMAJ51A	TVS	Vrwm=51V, Vbr=56.7..62.7V, 4.9A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ51A	-	SMAJ51CA	TVS	Vrwm=51V, Vbr=56.7..62.7V, 4.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ54A	-	SMAJ54A	TVS	Vrwm=54V, Vbr=60.0..66.3V, 4.6A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ54A	-	SMAJ54CA	TVS	Vrwm=54V, Vbr=60.0..66.3V, 4.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ58A	-	SMAJ58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, 4.3A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ58A	-	SMAJ58CA	TVS	Vrwm=58V, Vbr=64.4..71.2V, 4.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ6.5A	-	SMAJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 35.7A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ6.5A	-	SMAJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 35.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ60A	-	SMAJ60A	TVS	Vrwm=60V, Vbr=66.7..73.7V, 4.1A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ60A	-	SMAJ60CA	TVS	Vrwm=60V, Vbr=66.7..73.7V, 4.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ64A	-	SMAJ64A	TVS	Vrwm=64V, Vbr=71.1..78.6V, 3.9A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ64A	-	SMAJ64CA	TVS	Vrwm=64V, Vbr=71.1..78.6V, 3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ7.5A	-	SMAJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 31.0A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ7.5A	-	SMAJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 31.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ70A	-	SMAJ70A	TVS	Vrwm=70V, Vbr=77.8..86.0V, 3.5A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ70A	-	SMAJ70CA	TVS	Vrwm=70V, Vbr=77.8..86V, 3.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ75A	-	SMAJ75A	TVS	Vrwm=75V, Vbr=83.3..92.1V, 3.3A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ75A	-	SMAJ75CA	TVS	Vrwm=75V, Vbr=83.3..92.1V, 3.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ78A	-	SMAJ78A	TVS	Vrwm=78V, Vbr=86.7..95.8V, 3.2A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ78A	-	SMAJ78CA	TVS	Vrwm=78V, Vbr=86.7..95.8V, 3.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ8.5A	-	SMAJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 27.7A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ8.5A	-	SMAJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 27.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ85A	-	SMAJ85A	TVS	Vrwm=85V, Vbr=94.4..104V, 2.9A, 400W(1ms)	DO-214AC	1d	1a	Sec
AJ85A	-	SMAJ85CA	TVS	Vrwm=85V, Vbr=94.4..104V, 2.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AJ90A	-	SMAJ90A	TVS	Vrwm=90V, Vbr=100..111V, 2.7A, 400W(1ms),	DO-214AC	1d	1a	Sec
AJ90A	-	SMAJ90CA	TVS	Vrwm=90V, Vbr=100..111V, 2.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Sec
AK	-	CD214B-T6.5CA	TVS	Vrwm=6.5V, Irsm=53.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
AK	-	MA5Z270-M	Zener diode	270V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AK	-	MAZU270-M	Zener diode	270..290V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AK	-	MM1Z5264B	Zener diode	60V±5%, Izt=2.1mA, Zzt=170Ω, 500mW	SOD-123FL	7d	1a	Bts
AK	-	MMSZ5264B	Zener diode	60V±5%, Izt=2.1mA, Zzt=170Ω, 500mW	SOD-123	5d	1a	Eic
AK	-	MSMP6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, Ipp=69.0A, 150W (1ms)	MicroSMP	8d	1k	Vs
AK	-	P4SMA8V2A	TVS	Vbr=7.79..8.61V, Vrwm=8.2V, 33.1A, 400W (1ms)	DO-214AC	1d	2j	Fag
AK	-	P4SMAJ6.5A	TVS	Vrwm=6.5V, 35.7A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AK	-	P6SMBJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..9.14V, 53.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AK	-	PMF6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, Ipp=17.9A, 200W(1ms)	SOD-123FL	7d	1a	Shp
AK	-	PTVS18VS1UR	TVS	Vrwm=18V, Vbr=20.0..22.10V, 13.7A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AK	-	SMA6L6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 53.6A, 600W(1ms)	DO-221AC	7d	2s	Lif
AK	-	SMAJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 35.7A, 400W(1ms)	DO-214AC	1d	1k	Vs
AK	-	SMBG6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AK	-	SMBJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
AK	-	SMBJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AK	-	SMF6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, Ipp=17.9A, 200W(1ms)	SMF	1d	2sa	Lif
AK	-	SMF6V5A	ESDP-diode	Vbr=7.22V, Vrwm=6.5V, Ipp=17.9A, 200W(1ms)	SMF	7d	2y	Vs
AK	-	SMP6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, Ipp=35.7A, 400W(1ms)	DO-220AA	8d	1a	Vs
AK	-	TV04A6V5J-G	TVS	Vrwm=6.50V, Vbr=7.22..7.98V, Ipp=35.71A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AK	-	TV06B6V5JB-G	TVS	Vrwm=6.50V, Vbr=7.22..7.98V, Ipp=53.57A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
AK	-	ZMV932TA	C-diode	VHF-tuning, 12V, 8.5/10.5pF(2.5V)	SOD-323	5d	1a	Zx
AK7	-	SM6T7V5CA	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, 53A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AKA	-	TPSMA6L6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=53.6A, 600W(1ms)	DO-221AC	1d	2s	Lif
AKJ	-	P4SMA8.2A	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 35.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
AKK	-	SMA8.2A	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 33.1A, 400W(1ms)	DO-214AC	1d	1a	Lge
AKM	-	SMA8.2CA	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 33.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
AKP	-	SMAJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 35.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
AKP	-	TPSMA8.2A	TVS	Vrwm=8.2V, Ipp=33.1A, 400W (1ms)	DO-214AC	1d	1k	Vs
AKP	-	TPSMP8.2A	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, Ipp=24.8A, 300W(1ms)	DO-220AA	8d	1a	Vs
AL	-	MA5Z270-H	Zener diode	270V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AL	-	MAZU270-H	Zener diode	270..300V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AL	-	P4SMA9V1	TVS	Vbr=8.65..9.55V, Vrwm=8.1V, 29.9A, 400W (1ms)	DO-214AC	1d	2j	Fag
AL	-	P4SMAJ7.0	TVS	Vrwm=7V, 30.1A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AL	-	P6SMBJ7.0C	TVS	Vrwm=7V, Vbr=7.78..9.86V, 45.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AL	-	PTVS20VS1UR	TVS	Vrwm=20V, Vbr=22.20..24.50V, 12.3A, 400W (1ms)	SOD-123W	7d	1a	Nxp

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
AL	-	SMAJ7.0	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, 30.1A, 400W(1ms)	DO-214AC	1d	1k	Vs
AL	-	SMBG7.0C	TVS	Vrwm=7.0V, Vbr=7.78..9.86V, 45.1A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AL	-	SMBJ7.0C	TVS	Vrwm=7.0V, Vbr=7.78..9.86V, 45.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AL	-	TV04A7V0K-G	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=30.08A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AL	-	TV06B7V0KB-G	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=45.11A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
AL	-	ZMV933TA	C-diode	VHF-tuning, 12V, 18/27pF(2.5V)	SOD-323	5d	1a	Zx
ALJ	-	P4SMA9.1	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 30.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
ALK	-	SMA9.1	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 29.0A, 400W(1ms)	DO-214AC	1d	1a	Lge
ALM	-	SMA9.1C	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 29.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
ALP	-	SMAJ7.0C	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, 30.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
ALP	-	TPSMA9.1	TVS	Vrwm=9.1V, Ipp=29A, 400W (1ms)	DO-214AC	1d	1k	Vs
ALP	-	TPSMP9.1	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, Ipp=21.7A, 300W(1ms)	DO-220AA	8d	1a	Vs
AM	-	CD214B-T7.0CA	TVS	Vrwm=7.0V, Irsm=50.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Bm
AM	-	ESDA3L12C	TVS	Vrwm=12V, Vbr=13.97..15.44V, Ipp=11.0A, 350w(20µs), Bidir.	SOD-323FL	7ba	1j	Frm
AM	-	MA5Z300-L	Zener diode	300V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AM	-	MAZU300-L	Zener diode	290..310V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AM	-	MM3Z5222B	Zener diode	2.5V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Bts
AM	-	MSMP7.0A	TVS	Vbr=7.78..8.60V, Vrwm=7.0V, Ipp=63.7A, 150W (1ms)	MicroSMP	8d	1k	Vs
AM	-	P4SMA9V1A	TVS	Vbr=8.65..9.55V, Vrwm=8.1V, 29.9A, 400W (1ms)	DO-214AC	1d	2j	Fag
AM	-	P4SMAJ7.0A	TVS	Vrwm=7V, 33.3A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AM	-	P6SMBJ7.0CA	TVS	Vrwm=7V, Vbr=7.78..9.86V, 50A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AM	-	PMF7.0A	TVS	Vbr=7.78..8.60V, Vrwm=7.0V, Ipp=16.7A, 200W(1ms)	SOD-123FL	7d	1a	Shp
AM	-	PTVS22VS1UR	TVS	Vrwm=22V, Vbr=24.40..26.90V, 11.3A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AM	-	SMA6L7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, 50.0A, 600W(1ms)	DO-221AC	7d	2s	Lif
AM	-	SMAJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.6V, 33.3A, 400W(1ms)	DO-214AC	1d	1k	Vs
AM	-	SMBG7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, 50.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AM	-	SMBJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, 50.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
AM	-	SMBJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, 50.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AM	-	SMF7.0A	TVS	Vbr=7.78..8.6V, Vrwm=7.0V, Ipp=16.7A, 200W(1ms)	SMF	1d	2sa	Lif
AM	-	SMF7V0A	ESDP-diode	Vbr=7.78V, Vrwm=7V, Ipp=16.7A, 200W(1ms)	SMF	7d	2y	Vs
AM	-	SMP7.0A	TVS	Vbr=7.78..8.60V, Vrwm=7.0V, Ipp=33.3A, 400W(1ms)	DO-220AA	8d	1a	Vs
AM	-	TV04A7V0J-G	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=33.33A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AM	-	TV06B7V0JB-G	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=50.0A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
AM	-	ZMV933ATA	C-diode	VHF-tuning, 12V, 20/24.7pF(2.5V)	SOD-323	5d	1a	Zx
AMA	-	TPSMA6L7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=50.0A, 600W(1ms)	DO-221AC	1d	2s	Lif
AMJ	-	P4SMA9.1A	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 31.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
AMK	-	SMA9.1A	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 29.8A, 400W(1ms)	DO-214AC	1d	1a	Lge
AMM	-	SMA9.1CA	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 29.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
AMP	-	SMAJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.6V, 33.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
AMP	-	TPSMA9.1A	TVS	Vrwm=9.1V, Ipp=29.9A, 400W (1ms)	DO-214AC	1d	1k	Vs
AMP	-	TPSMP9.1A	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, Ipp=22.4A, 300W(1ms)	DO-220AA	8d	1a	Vs
AN	-	ESDA3L15C	TVS	Vrwm=15V, Vbr=17.39..19.22V, Ipp=10.0A, 350w(20µs), Bidir.	SOD-323FL	7ba	1j	Frm
AN	-	MA5Z300-M	Zener diode	300V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AN	-	MAZU300-M	Zener diode	300..320V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AN	-	MM3Z5224B	Zener diode	2.8V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Bts
AN	-	P4SMA10	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 29.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
AN	-	P4SMAJ7.5	TVS	Vrwm=7.5V, 28A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AN	-	P6SMBJ7.5C	TVS	Vrwm=7.5V, Vbr=8.33..10.67V, 42A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AN	-	PTVS24VS1UR	TVS	Vrwm=24V, Vbr=26.70..29.50V, 10.3A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AN	-	SMAJ7.5	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, 28A, 400W(1ms)	DO-214AC	1d	1k	Vs
AN	-	SMBG7.5C	TVS	Vrwm=7.5V, Vbr=8.33..10.67V, 42.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AN	-	SMBJ7.5C	TVS	Vrwm=7.5V, Vbr=8.33..10.67V, 42.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AN	-	SMP7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, Ipp=31.0A, 400W(1ms)	DO-220AA	8d	1a	Vs
AN	-	TV04A7V5K-G	TVS	Vrwm=7.50V, Vbr=8.33..10.20V, Ipp=27.97A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AN	-	TV06B7V5KB-G	TVS	Vrwm=7.50V, Vbr=8.33..10.20V, Ipp=41.96A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
AN	-	ZMV934TA	C-diode	VHF-tuning, 12V, 40/65pF(2.5V)	SOD-323	5d	1a	Zx
ANJ	-	P4SMA10	TVS	Vbr=9.00..11.0V, Vrwm=8.10V, 28.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
ANK	-	SMA10	TVS	Vbr=9.0..11.0V, Vrwm=8.10V, 26.7A, 400W(1ms)	DO-214AC	1d	1a	Lge
ANM	-	SMA10C	TVS	Vbr=9.0..11.0V, Vrwm=8.10V, 26.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
ANP	-	SMAJ7.5C	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, 28A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
ANP	-	TPSMA10	TVS	Vrwm=10V, Ipp=26.7A, 400W (1ms)	DO-214AC	1d	1k	Vs
ANP	-	TPSMP10	TVS	Vbr=9.0..11.0V, Vrwm=8.10V, Ipp=20.0A, 300W(1ms)	DO-220AA	8d	1a	Vs
AO	-	FSSH110	Si-diode	SBR, 110V, 1A, Vf<0.8V(1A)	DO-214AC	1d	2j	Fag
AO	-	MA5Z300-H	Zener diode	300V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AO	-	MAZU300-H	Zener diode	310..330V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AO	-	ZMV934ATA	C-diode	VHF-tuning, 12V, 47/57.7pF(2.5V)	SOD-323	5d	1a	Zx
AP	-	CD214B-T7.5CA	TVS	Vrwm=7.5V, Irsm=46.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Bm
AP	-	CMDZ2L4	Zener diode	2.280..2.520V, Izt=0.5mA, Zzt=900Ω, 250mW	SOD-323	5d	1a	Cen
AP	-	ESDA3L24C	TVS	Vrwm=24V, Vbr=27.27..30.14V, Ipp=6.0A, 350w(20µs), Bidir.	SOD-323FL	7ba	1j	Frm
AP	-	KDZ33FVY	Zener diode	32.15..33.79V, Izt=2mA, Zzt=250Ω, 100mW	TFSC	7d	1a	Kec

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
AP	-	MA5Z330-L	Zener diode	330V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AP	-	MAZU330-L	Zener diode	320..340V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AP	-	MM3Z5233B	Zener diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOD-323FL	7d	1a	Bts
AP	-	MSMP7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, Ipp=58.8A, 150W (1ms)	MicroSMP	8d	1k	Vs
AP	-	P4SMA10A	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 29.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
AP	-	P4SMAJ7.5A	TVS	Vrwm=7.5V, 31A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AP	-	P6SMBJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..10.67V, 46.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AP	-	PMF7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, Ipp=15.5A, 200W(1ms)	SOD-123FL	7d	1a	Shp
AP	-	PTVS26VS1UR	TVS	Vrwm=26V, Vbr=28.90..31.90V, 9.5A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AP	-	SMA6L7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 46.6A, 600W(1ms)	DO-221AC	7d	2s	Lif
AP	-	SMAJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 31A, 400W(1ms)	DO-214AC	1d	1k	Vs
AP	-	SMBG7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 46.5A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AP	-	SMBJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 46.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AP	-	SMBJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 46.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
AP	-	SMF7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, Ipp=15.5A, 200W(1ms)	SMF	1d	2sa	Lif
AP	-	SMF7V5A	ESDP-diode	Vbr=8.33V, Vrwm=7.5V, Ipp=15.5A, 200W(1ms)	SMF	7d	2y	Vs
AP	-	TV04A7V5J-G	TVS	Vrwm=7.50V, Vbr=8.33..9.21V, Ipp=31.01A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AP	-	TV06B7V5JB-G	TVS	Vrwm=7.50V, Vbr=8.33..9.21V, Ipp=46.51A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
APA	-	TPSMA6L7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=46.6A, 600W(1ms)	DO-221AC	1d	2s	Lif
APJ	-	P4SMA10A	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 29.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
APK	-	SMA10A	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 27.6A, 400W(1ms)	DO-214AC	1d	1a	Lge
APM	-	SMA10CA	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 27.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
APP	-	SMAJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 31A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
APP	-	TPSMA10A	TVS	Vrwm=10V, Ipp=27.6A, 400W (1ms)	DO-214AC	1d	1k	Vs
APP	-	TPSMP10A	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, Ipp=20.7A, 300W(1ms)	DO-220AA	8d	1a	Vs
AQ	-	ESDA3L03C	TVS	Vrwm=3.3V, Vbr=4.75..5.25V, Ipp=20.0A, 350w(20µs), Bidir.	SOD-323FL	7ba	1j	Frm
AQ	-	P4SMA11	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 26.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
AQ	-	P4SMAJ8.0	TVS	Vrwm=8V, 26.5A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AQ	-	P6SMBJ8.0C	TVS	Vrwm=8V, Vbr=8.89..11.3V, 40A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AQ	-	SMAJ8.0	TVS	Vrwm=8.0V, Vbr=8.89..10.9V, 26.7A, 400W(1ms)	DO-214AC	1d	1k	Vs
AQ	-	SMBG8.0C	TVS	Vrwm=8.0V, Vbr=8.89..11.3V, 40.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AQ	-	SMBJ8.0C	TVS	Vrwm=8.0V, Vbr=8.89..11.3V, 40.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AQ	-	TV04A8V0K-G	TVS	Vrwm=8.0V, Vbr=8.89..10.90V, Ipp=26.67A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AQ	-	TV06B8V0KB-G	TVS	Vrwm=8.0V, Vbr=8.89..10.90V, Ipp=40.0A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
AQJ	-	P4SMA11	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 26.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
AQK	-	SMA11	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 24.7A, 400W(1ms)	DO-214AC	1d	1a	Lge
AQM	-	SMA11C	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 24.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
AQP	-	SMAJ8.0C	TVS	Vrwm=8.0V, Vbr=8.89..10.9V, 26.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
AQP	-	TPSMA11	TVS	Vrwm=11V, Ipp=24.7A, 400W (1ms)	DO-214AC	1d	1k	Vs
AQP	-	TPSMP11	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, Ipp=18.5A, 300W(1ms)	DO-220AA	8d	1a	Vs
AR	-	BAS16J	Si-diode	Sw, Fast, 75V, 215mA, 250mW, <6ns	SOD-323F	6d	1a	Nxp
AR	-	CD214B-T8.0CA	TVS	Vrwm=8.0V, Irsm=44.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
AR	-	CMDZ43L	Zener diode	40.85..45.15V, Izt=0.5mA, Zzt=400Ω, 250mW	SOD-323	5d	1a	Cen
AR	-	ESDA3L08C	TVS	Vrwm=8.0V, Vbr=8.93..9.87V, Ipp=17.0A, 350w(20µs), Bidir.	SOD-323FL	7ba	1j	Frm
AR	-	MA5Z330-M	Zener diode	330V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AR	-	MAZU330-M	Zener diode	330..350V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AR	-	MM3Z5238B	Zener diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOD-323FL	7d	1a	Bts
AR	-	MSMP8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, Ipp=54.9A, 150W (1ms)	MicroSMP	8d	1k	Vs
AR	-	P4SMA11A	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 27.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
AR	-	P4SMAJ8.0A	TVS	Vrwm=8V, 29.4A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AR	-	P6SMBJ8.0CA	TVS	Vrwm=8V, Vbr=8.89..11.3V, 44.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AR	-	PMF8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, Ipp=14.7A, 200W(1ms)	SOD-123FL	7d	1a	Shp
AR	-	PTVS28VS1UR	TVS	Vrwm=28V, Vbr=31.10..34.40V, 8.8A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AR	-	SMA6L8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 44.2A, 600W(1ms)	DO-221AC	7d	2s	Lif
AR	-	SMAJ8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 29.4A, 400W(1ms)	DO-214AC	1d	1k	Vs
AR	-	SMBG8.0CA	TVS	Vrwm=8V, Vbr=8.89..10.23V, 44.1A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AR	-	SMBJ8.0CA	TVS	Vrwm=8V, Vbr=8.89..10.23V, 44.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AR	-	SMBJ8.0CA	TVS	Vrwm=8V, Vbr=8.89..10.23V, 44.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
AR	-	SMF8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, Ipp=14.7A, 200W(1ms)	SMF	1d	2sa	Lif
AR	-	SMF8V0A	ESDP-diode	Vbr=8.89V, Vrwm=8V, Ipp=14.7A, 200W(1ms)	SMF	7d	2y	Vs
AR	-	SMP8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, Ipp=29.4A, 400W(1ms)	DO-220AA	8d	1a	Vs
AR	-	TV04A8V0J-G	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=29.41A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AR	-	TV06B8V0JB-G	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=44.12A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
ARA	-	TPSMA6L8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=44.2A, 600W(1ms)	DO-221AC	1d	2s	Lif
ARD	-	SMAJ54	TVS	Vbr=60.0..73.3V, Vrwm=54V, 3.1A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARE	-	SMAJ54A	TVS	Vbr=60.0..66.3V, Vrwm=54V, 3.4A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARF	-	SMAJ58	TVS	Vbr=64.4..78.7V, Vrwm=58V, 2.9A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARG	-	SMAJ58A	TVS	Vbr=64.4..71.2V, Vrwm=58V, 3.2A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARH	-	SMAJ60	TVS	Vbr=66.7..81.5V, Vrwm=60V, 2.8A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARJ	-	P4SMA11A	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 27.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
ARK	-	SMA11A	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 25.6A, 400W(1ms)	DO-214AC	1d	1a	Lge
ARK	-	SMAJ60A	TVS	Vbr=66.7..73.7V, Vrwm=60V, 3.1A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARL	-	SMAJ64	TVS	Vbr=71.1..86.9V, Vrwm=64V, 2.6A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARM	-	SMA11CA	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 25.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
ARM	-	SMAJ64A	TVS	Vbr=71.1..78.6V, Vrwm=64V, 2.9A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARN	-	SMAJ70	TVS	Vbr=77.8..95.1V, Vrwm=70V, 2.4A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARP	-	SMAJ70A	TVS	Vbr=77.8..86.0V, Vrwm=70V, 2.7A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARP	-	SMAJ8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 29.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
ARP	-	TPSMA11A	TVS	Vrwm=11V, Ipp=25.6A, 400W (1ms)	DO-214AC	1d	1k	Vs
ARP	-	TPSMP11A	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, Ipp=19.2A, 300W(1ms)	DO-220AA	8d	1a	Vs
ARQ	-	SMAJ75	TVS	Vbr=83.3..102V, Vrwm=75V, 2.2A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARR	-	SMAJ75A	TVS	Vbr=83.3..92.1V, Vrwm=75V, 2.5A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARS	-	SMAJ78	TVS	Vbr=86.7..106V, Vrwm=78V, 2.2A, 400W(1ms)	DO-214AC	1d	1a	Gal
ART	-	SMAJ78A	TVS	Vbr=86.7..95.8V, Vrwm=78V, 2.4A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARU	-	SMAJ85	TVS	Vbr=94.4..115V, Vrwm=85V, 2.0A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARV	-	SMAJ85A	TVS	Vbr=94.4..104V, Vrwm=85V, 2.2A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARW	-	SMAJ90	TVS	Vbr=100..122V, Vrwm=90V, 1.9A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARX	-	SMAJ90A	TVS	Vbr=100..111V, Vrwm=90V, 2.1A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARY	-	SMAJ100	TVS	Vbr=111..136V, Vrwm=100V, 1.7A, 400W(1ms)	DO-214AC	1d	1a	Gal
ARZ	-	SMAJ100A	TVS	Vbr=111..123V, Vrwm=100V, 1.9A, 400W(1ms)	DO-214AC	1d	1a	Gal
AS	-	BZX100A	Zener diode	95..105V, If=1mA, 310mW	SOD-323F	7d	1a	Nxp
AS	-	ESDA3L15	TVS	Vrwm=15V, Vbr=17.39..19.22V, Ipp=10.0A, 350w(20µs)	SOD-323FL	7d	1a	Frm
AS	-	MA5Z330-H	Zener diode	330V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AS	-	MAZU330-H	Zener diode	340..360V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AS	-	P4SMA12	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
AS	-	P4SMAJ8.5	TVS	Vrwm=8.5V, 25.1A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AS	-	P6SMBJ8.5C	TVS	Vrwm=8.5V, Vbr=9.44..1.32V, 37.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AS	-	PTVS30VS1UR	TVS	Vrwm=30V, Vbr=33.30..36.80V, 8.3A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AS	-	SMAJ8.5	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, 25.2A, 400W(1ms)	DO-214AC	1d	1k	Vs
AS	-	SMBG8.5C	TVS	Vrwm=8.5V, Vbr=9.44..11.92V, 37.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AS	-	SMBJ8.5C	TVS	Vrwm=8.5V, Vbr=9.44..11.92V, 37.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AS	-	TV04A8V5K-G	TVS	Vrwm=8.55V, Vbr=9.44..11.50V, Ipp=25.16A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AS	-	TV06B8V5KB-G	TVS	Vrwm=8.55V, Vbr=9.44..11.50V, Ipp=37.74A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
ASD	-	AS1PD	Si-diode	Rectifier, 200V, 1.5A, Vf<1.15V(1.5A)	DO-220AA	8d	1k	Vs
ASD	-	SMAJ110	TVS	Vbr=122..149V, Vrwm=110V, 1.5A, 400W(1ms)	DO-214AC	1d	1a	Gal
ASE	-	SMAJ110A	TVS	Vbr=122..135V, Vrwm=110V, 1.7A, 400W(1ms)	DO-214AC	1d	1a	Gal
ASF	-	SMAJ120	TVS	Vbr=133..163V, Vrwm=120V, 1.4A, 400W(1ms)	DO-214AC	1d	1a	Gal
ASG	-	AS1PG	Si-diode	Rectifier, 400V, 1.5A, Vf<1.15V(1.5A)	DO-220AA	8d	1k	Vs
ASG	-	SMAJ120A	TVS	Vbr=133..147V, Vrwm=120V, 1.6A, 400W(1ms)	DO-214AC	1d	1a	Gal
ASH	-	SMAJ130	TVS	Vbr=144..176V, Vrwm=130V, 1.3A, 400W(1ms)	DO-214AC	1d	1a	Gal
ASJ	-	AS1PJ	Si-diode	Rectifier, 600V, 1.5A, Vf<1.15V(1.5A)	DO-220AA	8d	1k	Vs
ASJ	-	P4SMA12	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 24.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
ASK	-	AS1PK	Si-diode	Rectifier, 800V, 1.5A, Vf<1.15V(1.5A)	DO-220AA	8d	1k	Vs
ASK	-	SMA12	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 23.1A, 400W(1ms)	DO-214AC	1d	1a	Lge
ASK	-	SMAJ130A	TVS	Vbr=144..159V, Vrwm=130V, 1.4A, 400W(1ms)	DO-214AC	1d	1a	Gal
ASL	-	SMAJ150	TVS	Vbr=167..204V, Vrwm=150V, 1.1A, 400W(1ms)	DO-214AC	1d	1a	Gal
ASM	-	AS1PM	Si-diode	Rectifier, 1000V, 1.5A, Vf<1.15V(1.5A)	DO-220AA	8d	1k	Vs
ASM	-	SMA12C	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 23.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
ASM	-	SMAJ150A	TVS	Vbr=167..185V, Vrwm=150V, 1.2A, 400W(1ms)	DO-214AC	1d	1a	Gal
ASN	-	SMAJ160	TVS	Vbr=178..218V, Vrwm=160V, 1.0A, 400W(1ms)	DO-214AC	1d	1a	Gal
ASP	-	SMAJ160A	TVS	Vbr=178..197V, Vrwm=160V, 1.2A, 400W(1ms)	DO-214AC	1d	1a	Gal
ASP	-	SMAJ8.5C	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, 25.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
ASP	-	TPSMA12	TVS	Vrwm=12V, Ipp=23.1A, 400W (1ms)	DO-214AC	1d	1k	Vs
ASP	-	TPSMP12	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, Ipp=17.3A, 300W(1ms)	DO-220AA	8d	1a	Vs
ASQ	-	SMAJ170	TVS	Vbr=189..231V, Vrwm=170V, 1.0A, 400W(1ms)	DO-214AC	1d	1a	Gal
ASR	-	SMAJ170A	TVS	Vbr=189..209V, Vrwm=170V, 1.1A, 400W(1ms)	DO-214AC	1d	1a	Gal
ASS	-	SMAJ188A	TVS	Vbr=209..231V, Vrwm=188V, 0.9A, 400W(1ms)	DO-214AC	1d	1a	Gal
AST	-	SMAJ188	TVS	Vbr=209..255V, Vrwm=188V, 0.9A, 400W(1ms)	DO-214AC	1d	1a	Gal
AT	-	BZB100A	TVS	Vz=95..105V, Ipp=0.23A, 30W(100µs), Bidir.	SOD-323	5ba	1a	Nxp
AT	-	CD214B-T8.5CA	TVS	Vrwm=8.5V, Irsm=41.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
AT	-	ESDA3L24	TVS	Vrwm=24V, Vbr=27.27..30.14V, Ipp=6.0A, 350w(20µs)	SOD-323FL	7d	1a	Frm
AT	-	MSMP8.5A	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, Ipp=51.3A, 150W (1ms)	MicroSMP	8d	1k	Vs
AT	-	P4SMA12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
AT	-	P4SMAJ8.5A	TVS	Vrwm=8.5V, 27.7A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AT	-	P6SMBJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..1.32V, 41.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AT	-	PMF8.5A	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, Ipp=13.9A, 200W(1ms)	SOD-123FL	7d	1a	Shp
AT	-	PTVS33VS1UR	TVS	Vrwm=33V, Vbr=36.70..40.60V, 7.5A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AT	-	SMA6L8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.40V, 41.7A, 600W(1ms)	DO-221AC	7d	2s	Lif
AT	-	SMAJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 27.8A, 400W(1ms)	DO-214AC	1d	1k	Vs
AT	-	SMBG8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 41.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
AT	-	SMBJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 41.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AT	-	SMBJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 41.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
AT	-	SMF8.5A	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, Ipp=13.9A, 200W(1ms)	SMF	1d	2sa	Lif
AT	-	SMF8V5A	ESDP-diode	Vbr=9.44V, Vrwm=8.5V, Ipp=13.9A, 200W(1ms)	SMF	7d	2y	Vs
AT	-	TV04A8V5J-G	TVS	Vrwm=8.55V, Vbr=9.44..10.40V, Ipp=27.78A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AT	-	TV06B8V5JB-G	TVS	Vrwm=8.55V, Vbr=9.44..10.40V, Ipp=41.67A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
AT7	-	SM6T10CA	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, 41A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
ATA	-	TPSMA6L8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.40V, Ipp=41.7A, 600W(1ms)	DO-221AC	1d	2s	Lif
ATJ	-	P4SMA12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
ATK	-	SMA12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 23.9A, 400W(1ms)	DO-214AC	1d	1a	Lge
ATM	-	SMA12CA	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 23.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
ATP	-	SMAJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 27.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
ATP	-	TPSMA12A	TVS	Vrwm=12V, Ipp=24.0A, 400W (1ms)	DO-214AC	1d	1k	Vs
ATP	-	TPSMP12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, Ipp=18.0A, 300W(1ms)	DO-220AA	8d	1a	Vs
AU	-	P4SMA13	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
AU	-	P4SMAJ9.0	TVS	Vrwm=9V, 23.6A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AU	-	P6SMBJ9.0C	TVS	Vrwm=9V, Vbr=10.0..12.6V, 35.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AU	-	PTVS36VS1UR	TVS	Vrwm=36V, Vbr=40.0..44.20V, 6.9A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AU	-	SMAJ9.0	TVS	Vrwm=9.0V, Vbr=10.0..12.2V, 23.7A, 400W(1ms)	DO-214AC	1d	1k	Vs
AU	-	SMBG9.0C	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AU	-	SMBJ9.0C	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AU	-	TV04A9V0K-G	TVS	Vrwm=9.0V, Vbr=10.0..12.20V, Ipp=23.67A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AU	-	TV06B9V0KB-G	TVS	Vrwm=9.0V, Vbr=10.0..12.20V, Ipp=35.50A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
AUD	-	AU1PD	Si-diode	Rectifier, 200V, 1A, Vf<1.4V(1A)	DO-220AA	8d	1k	Vs
AUG	-	AU1PG	Si-diode	Rectifier, 400V, 1A, Vf<1.4V(1A)	DO-220AA	8d	1k	Vs
AUJ	-	AU1PJ	Si-diode	Rectifier, 600V, 1A, Vf<1.4V(1A)	DO-220AA	8d	1k	Vs
AUK	-	AU1PK	Si-diode	Rectifier, 800V, 1A, Vf<1.6V(1A)	DO-220AA	8d	1k	Vs
AUK	-	SMA13	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 21.0A, 400W(1ms)	DO-214AC	1d	1a	Lge
AUM	-	AU1PM	Si-diode	Rectifier, 1000V, 1A, Vf<1.6V(1A)	DO-220AA	8d	1k	Vs
AUM	-	SMA13C	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 21.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
AUP	-	SMAJ9.0C	TVS	Vrwm=9.0V, Vbr=10.0..12.2V, 23.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
AUP	-	TPSMA13	TVS	Vrwm=13V, Ipp=21.1A, 400W (1ms)	DO-214AC	1d	1k	Vs
AUP	-	TPSMP13	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, Ipp=21.1A, 400W(1ms)	DO-220AA	8d	1a	Vs
AV	-	CD214B-T9.0CA	TVS	Vrwm=9.0V, Irsm=39.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
AV	-	MSMP9.0A	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, Ipp=48.6A, 150W (1ms)	MicroSMP	8d	1k	Vs
AV	-	P4SMA13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
AV	-	P4SMAJ9.0A	TVS	Vrwm=9V, 26A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AV	-	P6SMB36A	TVS	Vrwm=36V, Vbr=34.2..37.8V, 12A, 600W(1ms)	DO-214AA	1d	2j	Fag
AV	-	P6SMBJ20A	TVS	Vrwm=20V, Vbr=18..22V, 218.5A, 600W(1ms)	DO-214AA	1d	1a	Pjt
AV	-	P6SMBJ9.0CA	TVS	Vrwm=9V, Vbr=10.0..12.6V, 39A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AV	-	PMF9.0A	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, Ipp=13.0A, 200W(1ms)	SOD-123FL	7d	1a	Shp
AV	-	PTVS40VS1UR	TVS	Vrwm=40V, Vbr=44.40..49.10V, 6.2A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AV	-	SMA6L9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, 39.0A, 600W(1ms)	DO-221AC	7d	2s	Lif
AV	-	SMAJ9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, 26A, 400W(1ms)	DO-214AC	1d	1k	Vs
AV	-	SMBG9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AV	-	SMBJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
AV	-	SMBJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AV	-	SMF9.0A	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, Ipp=13A, 200W(1ms)	SMF	1d	2sa	Lif
AV	-	SMF9V0A	ESDP-diode	Vbr=10.0V, Vrwm=9V, Ipp=13.5A, 200W(1ms)	SMF	7d	2y	Vs
AV	-	TV04A9V0J-G	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=25.97A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AV	-	TV06B9V0JB-G	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=38.96A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
AV7	-	SM6T24A	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, 18A, 600W(1ms)	DO-214AA	1d	1k	Vs
AV7	-	SM6T24CA	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, 18A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AVA	-	TPSMA6L9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=39.0A, 600W(1ms)	DO-221AC	1d	2s	Lif
AVD	-	SMAJ110C	TVS	Vbr=122..149V, Vrwm=110V, 1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AVE	-	SMAJ110CA	TVS	Vbr=122..135V, Vrwm=110V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AVF	-	SMAJ120C	TVS	Vbr=133..163V, Vrwm=120V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AVG	-	SMAJ120CA	TVS	Vbr=133..147V, Vrwm=120V, 1.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AVH	-	SMAJ130C	TVS	Vbr=144..176V, Vrwm=130V, 1.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AVJ	-	P4SMA13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
AVK	-	SMA13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 22.0A, 400W(1ms)	DO-214AC	1d	1a	Lge
AVK	-	SMAJ130CA	TVS	Vbr=144..159V, Vrwm=130V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AVL	-	SMAJ150C	TVS	Vbr=167..204V, Vrwm=150V, 1.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AVM	-	SMA13CA	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 22.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
AVM	-	SMAJ150CA	TVS	Vbr=167..185V, Vrwm=150V, 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AVN	-	SMAJ160C	TVS	Vbr=178..218V, Vrwm=160V, 1.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AVP	-	SMAJ160CA	TVS	Vbr=178..197V, Vrwm=160V, 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AVP	-	SMAJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, 26A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
AVP	-	TPSMA13A	TVS	Vrwm=13V, Ipp=22A, 400W (1ms)	DO-214AC	1d	1k	Vs
AVP	-	TPSMB36A	TVS	Vrwm=36V, Ipp=12.0A, 600W(1ms)	DO-214AA	1d	1k	Vs



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
AVP	-	TPSMP13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, Ipp=22.0A, 400W(1ms)	DO-220AA	8d	1a	Vs
AVQ	-	SMAJ170C	TVS	Vbr=189..231V, Vrwm=170V, 1.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AVR	-	SMAJ170CA	TVS	Vbr=189..209V, Vrwm=170V, 1.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AVS	-	SMAJ188CA	TVS	Vbr=209..231V, Vrwm=188V, 0.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AVT	-	SMAJ188C	TVS	Vbr=209..255V, Vrwm=188V, 0.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AW	-	P4SMA15	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
AW	-	P4SMAJ10	TVS	Vrwm=10V, 21.2A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AW	-	P6SMBJ10C	TVS	Vrwm=10V, Vbr=9..11V, 40A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AW	-	PTVS43VS1UR	TVS	Vrwm=43V, Vbr=47.80..52.80V, 5.8A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AW	-	SMAJ10	TVS	Vrwm=10V, Vbr=11.1..13.6V, 21.3A, 400W(1ms)	DO-214AC	1d	1k	Vs
AW	-	SMBG10C	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AW	-	SMBJ10C	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AW	-	TV04A100K-G	TVS	Vrwm=10.0V, Vbr=11.10..13.60V, Ipp=21.28A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AW	-	TV06B100KB-G	TVS	Vrwm=10.0V, Vbr=11.10..13.60V, Ipp=31.90A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
AWD	-	SMAJ5.0C	TVS	Vbr=6.40..7.81V, Vrwm=5.0V, 41.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWE	-	SMAJ5.0CA	TVS	Vbr=6.40..7.08V, Vrwm=5.0V, 43.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWF	-	SMAJ6.0C	TVS	Vbr=6.67..8.15V, Vrwm=6.0V, 35.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWG	-	SMAJ6.0CA	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 38.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWH	-	SMAJ6.5C	TVS	Vbr=7.22..8.82V, Vrwm=6.5V, 32.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWJ	-	P4SMA15	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, 19.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
AWK	-	SMA15	TVS	Vbr=13.5..16.3V, Vrwm=12.1V, 18.2A, 400W(1ms)	DO-214AC	1d	1a	Lge
AWK	-	SMAJ6.5CA	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 35.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWL	-	SMAJ7.0C	TVS	Vbr=7.78..9.51V, Vrwm=7.0V, 30.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWM	-	SMA15C	TVS	Vbr=13.5..16.3V, Vrwm=12.1V, 18.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
AWM	-	SMAJ7.0CA	TVS	Vbr=7.78..8.60V, Vrwm=7.0V, 33.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWN	-	SMAJ7.5C	TVS	Vbr=8.33..10.3V, Vrwm=7.5V, 28.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWP	-	SMAJ10C	TVS	Vrwm=10V, Vbr=11.1..12.3V, 21.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
AWP	-	SMAJ7.5CA	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 31.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWP	-	TPSMA15	TVS	Vrwm=15V, Ipp=18A, 400W (1ms)	DO-214AC	1d	1k	Vs
AWP	-	TPSMP15	TVS	Vbr=13.5..16.3V, Vrwm=12.1V, Ipp=18.2A, 400W(1ms)	DO-220AA	8d	1a	Vs
AWQ	-	SMAJ8.0C	TVS	Vbr=8.89..10.9V, Vrwm=8.0V, 26.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWR	-	SMAJ8.0CA	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 29.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWS	-	SMAJ8.5C	TVS	Vbr=9.44..11.5V, Vrwm=8.5V, 25.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWT	-	SMAJ8.5CA	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 27.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWU	-	SMAJ9.0C	TVS	Vbr=10.0..12.2V, Vrwm=9.0V, 23.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWV	-	SMAJ9.0CA	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 26.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWW	-	SMAJ10C	TVS	Vbr=11.1..13.6V, Vrwm=10V, 21.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWX	-	SMAJ10CA	TVS	Vbr=11.1..12.3V, Vrwm=10V, 23.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWY	-	SMAJ11C	TVS	Vbr=12.2..14.9V, Vrwm=11V, 19.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AWZ	-	SMAJ11CA	TVS	Vbr=12.2..13.5V, Vrwm=11V, 22.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AX	-	CD214B-T10CA	TVS	Vrwm=10V, Irsm=35.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
AX	-	MM3Z5244B	Zener diode	14V±5%, Izt=9.0mA, Zzt=15Ω, 200mW	SOD-323FL	7d	1a	Bts
AX	-	MSMP10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, Ipp=46.1A, 150W (1ms)	MicroSMP	8d	1k	Vs
AX	-	P4SMA15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
AX	-	P4SMAJ10A	TVS	Vrwm=10V, 23.5A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AX	-	P6SMBJ10CA	TVS	Vrwm=10V, Vbr=9..11V, 40A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AX	-	PMF10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, Ipp=11.8A, 200W(1ms)	SOD-123FL	7d	1a	Shp
AX	-	PTVS45VS1UR	TVS	Vrwm=45V, Vbr=50.0..55.30V, 5.5A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AX	-	SMA6L10A	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, 35.3A, 600W(1ms)	DO-221AC	7d	2s	Lif
AX	-	SMAJ10A	TVS	Vrwm=10V, Vbr=11.1..12.3V, 21.7A, 400W(1ms)	DO-214AC	1d	1q	Ste
AX	-	SMAJ10A	TVS	Vrwm=10V, Vbr=11.1..12.3V, 23.5A, 400W(1ms)	DO-214AC	1d	1k	Vs
AX	-	SMBG10CA	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
AX	-	SMBJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AX	-	SMBJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
AX	-	SMF10A	ESDP-diode	Vbr=11.1V, Vrwm=10V, Ipp=11.8A, 200W(1ms)	SMF	7d	2y	Vs
AX	-	SMF10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, Ipp=11.8A, 200W(1ms)	SMF	1d	2sa	Lif
AX	-	TV04A100J-G	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=23.53A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AX	-	TV06B100JB-G	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=35.29A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
AX7	-	SM6T12CA	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, 36A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
AXA	-	TPSMA6L10A	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=35.3A, 600W(1ms)	DO-221AC	1d	2s	Lif
AXD	-	SMAJ12C	TVS	Vbr=13.3..16.3V, Vrwm=12V, 18.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXE	-	SMAJ12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, 20.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXF	-	SMAJ13C	TVS	Vbr=14.4..17.6V, Vrwm=13V, 16.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXG	-	SMAJ13CA	TVS	Vbr=14.4..15.9V, Vrwm=13V, 18.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXH	-	SMAJ14C	TVS	Vbr=15.6..19.1V, Vrwm=14V, 15.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXJ	-	P4SMA15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
AXK	-	SMA15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 18.7A, 400W(1ms)	DO-214AC	1d	1a	Lge
AXK	-	SMAJ14CA	TVS	Vbr=15.6..17.2V, Vrwm=14V, 17.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXL	-	SMAJ15C	TVS	Vbr=16.7..20.4V, Vrwm=15V, 14.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXM	-	SMA15CA	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 18.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
AXM	-	SMAJ15CA	TVS	Vbr=16.7..18.5V, Vrwm=15V, 16.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXN	-	SMAJ16C	TVS	Vbr=17.8..21.8V, Vrwm=16V, 13.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXP	-	SMAJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.3V, 23.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
AXP	-	SMAJ16CA	TVS	Vbr=17.8..19.7V, Vrwm=16V, 15.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXP	-	TPSMA15A	TVS	Vrwm=15V, Ipp=18.9A, 400W (1ms)	DO-214AC	1d	1k	Vs
AXP	-	TPSMP15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, Ipp=18.9A, 400W(1ms)	DO-220AA	8d	1a	Vs
AXQ	-	SMAJ17C	TVS	Vbr=18.9..23.1V, Vrwm=17V, 13.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXR	-	SMAJ17CA	TVS	Vbr=18.9..20.9V, Vrwm=17V, 14.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXS	-	SMAJ18C	TVS	Vbr=20.0..24.4V, Vrwm=18V, 12.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXT	-	SMAJ18CA	TVS	Vbr=20.0..22.1V, Vrwm=18V, 13.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXU	-	SMAJ20C	TVS	Vbr=22.2..27.1V, Vrwm=20V, 11.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXV	-	SMAJ20CA	TVS	Vbr=22.2..24.5V, Vrwm=20V, 12.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXW	-	SMAJ22C	TVS	Vbr=24.4..29.8V, Vrwm=22V, 10.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXX	-	SMAJ22CA	TVS	Vbr=24.4..26.9V, Vrwm=22V, 11.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXY	-	SMAJ24C	TVS	Vbr=26.7..32.6V, Vrwm=24V, 9.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AXZ	-	SMAJ24CA	TVS	Vbr=26.7..29.5V, Vrwm=24V, 10.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AY	-	KDZ2.0VVY	Zener diode	1.95..2.15V, Izt=5mA, Zzt=100Ω, 100mW	VSC	7d	1a	Kec
AY	-	MM3Z5247B	Zener diode	17V±5%, Izt=7.4mA, Zzt=19Ω, 200mW	SOD-323FL	7d	1a	Bts
AY	-	P4SMA16	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
AY	-	P4SMAJ11	TVS	Vrwm=11V, 20A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AY	-	P6SMBJ11C	TVS	Vrwm=11V, Vbr=9.9..12.1V, 37A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AY	-	PTVS48VS1UR	TVS	Vrwm=48V, Vbr=53.30..58.90V, 5.2A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AY	-	SMAJ11	TVS	Vrwm=11V, Vbr=12.2..13.5V, 19.9A, 400W(1ms)	DO-214AC	1d	1k	Vs
AY	-	SMP11	TVS	Vbr=12.2..14.9V, Vrwm=11V, Ipp=19.9A, 400W(1ms)	DO-220AA	8d	1a	Vs
AY	-	TV04A110K-G	TVS	Vrwm=11.0V, Vbr=12.20..14.90V, Ipp=19.90A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AY	-	TV06B110KB-G	TVS	Vrwm=11.0V, Vbr=12.20..14.90V, Ipp=29.85A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
AYD	-	SMAJ26C	TVS	Vbr=28.9..35.3V, Vrwm=26V, 8.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYE	-	SMAJ26CA	TVS	Vbr=28.9..31.9V, Vrwm=26V, 9.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYF	-	SMAJ28C	TVS	Vbr=31.1..38.0V, Vrwm=28V, 8.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYG	-	SMAJ28CA	TVS	Vbr=31.1..34.4V, Vrwm=28V, 8.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYH	-	SMAJ30C	TVS	Vbr=33.3..40.7V, Vrwm=30V, 7.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYJ	-	P4SMA13	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 22.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
AYJ	-	P4SMA16	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 18.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
AYK	-	SMA16	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 17.0A, 400W(1ms)	DO-214AC	1d	1a	Lge
AYK	-	SMAJ30CA	TVS	Vbr=33.3..36.8V, Vrwm=30V, 8.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYL	-	SMAJ33C	TVS	Vbr=36.7..44.9V, Vrwm=33V, 5.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYM	-	SMA16C	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 17.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
AYM	-	SMAJ33CA	TVS	Vbr=36.7..40.6V, Vrwm=33V, 5.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYN	-	SMAJ36C	TVS	Vbr=40.0..48.9V, Vrwm=36V, 4.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYP	-	SMAJ11C	TVS	Vrwm=11V, Vbr=12.2..13.5V, 19.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
AYP	-	SMAJ36CA	TVS	Vbr=40.0..44.2V, Vrwm=36V, 5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYP	-	TPSMA16	TVS	Vrwm=16V, Ipp=17A, 400W (1ms)	DO-214AC	1d	1k	Vs
AYP	-	TPSMP16	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, Ipp=17.0A, 400W(1ms)	DO-220AA	8d	1a	Vs
AYQ	-	SMAJ40C	TVS	Vbr=44.4..54.3V, Vrwm=40V, 4.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYR	-	SMAJ40CA	TVS	Vbr=44.4..49.1V, Vrwm=40V, 4.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYS	-	SMAJ43C	TVS	Vbr=47.8..58.4V, Vrwm=43V, 3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYT	-	SMAJ43CA	TVS	Vbr=47.8..52.8V, Vrwm=43V, 4.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYU	-	SMAJ45C	TVS	Vbr=50.0..61.1V, Vrwm=45V, 3.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYV	-	SMAJ45CA	TVS	Vbr=50.0..55.3V, Vrwm=45V, 4.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYW	-	SMAJ48C	TVS	Vbr=53.3..65.1V, Vrwm=48V, 3.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYX	-	SMAJ48CA	TVS	Vbr=53.3..58.9V, Vrwm=48V, 3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYY	-	SMAJ51C	TVS	Vbr=56.7..69.3V, Vrwm=51V, 3.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AYZ	-	SMAJ51CA	TVS	Vbr=56.7..62.7V, Vrwm=51V, 3.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZ	-	BZT52B6V2S	Zener diode	6.08..6.32V, Izt=5mA, Zzt=10Ω, 200mW	SOD-323FL	7d	1a	Tsc
AZ	-	CD214B-T11CA	TVS	Vrwm=11V, Irsm=33.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
AZ	-	MA5Z190	Zener diode	190V, Iz=0.1mA, 150mW	S-Mini	8d	1a	Pan
AZ	-	MAZU190	Zener diode	180..200V, If=200mA, 150mW	S-Mini2	8d	1a	Pan
AZ	-	MM3Z5255B	Zener diode	28V±5%, Izt=4.5mA, Zzt=44Ω, 200mW	SOD-323FL	7d	1a	Bts
AZ	-	MM3Z6V2B	Zener diode	6.08..6.32V, Zzt=9Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
AZ	-	MM3Z6V2BW	Zener diode	6.08..6.32V, Izt=5mA, Zzt=10Ω, 200mW	SOD-323FL	7d	1a	Tac
AZ	-	MSMP11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, Ipp=41.0A, 150W (1ms)	MicroSMP	8d	1k	Vs
AZ	-	P4SMA16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
AZ	-	P4SMAJ11A	TVS	Vrwm=11V, 22A, 400W (1ms)	DO-214AC	1d	1a	Lsr
AZ	-	P6SMBJ11CA	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
AZ	-	PMF11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, Ipp=11.0A, 200W(1ms)	SOD-123FL	7d	1a	Shp
AZ	-	PTVS51VS1UR	TVS	Vrwm=51V, Vbr=56.70..62.70V, 4.9A, 400W (1ms)	SOD-123W	7d	1a	Nxp
AZ	-	SMA6L11A	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, 33.0A, 600W(1ms)	DO-221AC	7d	2s	Lif
AZ	-	SMAJ11A	TVS	Vrwm=11V, Vbr=12.2..13.5V, 22A, 400W(1ms)	DO-214AC	1d	1k	Vs
AZ	-	SMBJ11CA	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
AZ	-	SMF11A	ESDP-diode	Vbr=12.2V, Vrwm=11V, Ipp=11A, 200W(1ms)	SMF	7d	2y	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
AZ	-	SMF11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, Ipp=11A, 200W(1ms)	SMF	1d	2sa	Lif
AZ	-	SMP11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, Ipp=22.0A, 400W(1ms)	DO-220AA	8d	1a	Vs
AZ	-	TCMM3Z6V2B	Zener diode	6.2V±2%, Izt=5mA, Zzt=9Ω, 200mW	SOD-323FL	7d	1a	Tac
AZ	-	TV04A110J-G	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=21.98A, 400W(1ms)	DO-214AC	1d	2o	Cmc
AZ	-	TV06B110JB-G	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=32.97A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
AZA	-	TPSMA6L11A	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=33.0A, 600W(1ms)	DO-221AC	1d	2s	Lif
AZD	-	SMAJ54C	TVS	Vbr=60.0..73.3V, Vrwm=54V, 3.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZE	-	SMAJ54CA	TVS	Vbr=60.0..66.3V, Vrwm=54V, 3.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZF	-	SMAJ58C	TVS	Vbr=64.4..78.7V, Vrwm=58V, 2.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZG	-	SMAJ58CA	TVS	Vbr=64.4..71.2V, Vrwm=58V, 3.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZH	-	SMAJ60C	TVS	Vbr=66.7..81.5V, Vrwm=60V, 2.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZJ	-	P4SMA16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
AZK	-	SMA16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 17.8A, 400W(1ms)	DO-214AC	1d	1a	Lge
AZK	-	SMAJ60CA	TVS	Vbr=66.7..73.7V, Vrwm=60V, 3.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZL	-	SMAJ64C	TVS	Vbr=71.1..86.9V, Vrwm=64V, 2.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZM	-	SMA16CA	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 17.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
AZM	-	SMAJ64CA	TVS	Vbr=71.1..78.6V, Vrwm=64V, 2.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZN	-	SMAJ70C	TVS	Vbr=77.8..95.1V, Vrwm=70V, 2.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZP	-	SMAJ11CA	TVS	Vrwm=11V, Vbr=12.2..13.5V, 22A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
AZP	-	SMAJ70CA	TVS	Vbr=77.8..86.0V, Vrwm=70V, 2.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZP	-	TPSMA16A	TVS	Vrwm=16V, Ipp=17.8A, 400W (1ms)	DO-214AC	1d	1k	Vs
AZP	-	TPSMP16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, Ipp=17.8A, 400W(1ms)	DO-220AA	8d	1a	Vs
AZQ	-	SMAJ75C	TVS	Vbr=83.3..102V, Vrwm=75V, 2.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZR	-	SMAJ75CA	TVS	Vbr=83.3..92.1V, Vrwm=75V, 2.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZS	-	SMAJ78C	TVS	Vbr=86.7..106V, Vrwm=78V, 2.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZT	-	SMAJ78CA	TVS	Vbr=86.7..95.8V, Vrwm=78V, 2.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZU	-	SMAJ85C	TVS	Vbr=94.4..115V, Vrwm=85V, 2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZV	-	SMAJ85CA	TVS	Vbr=94.4..104V, Vrwm=85V, 2.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZW	-	SMAJ90C	TVS	Vbr=100..122V, Vrwm=90V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZX	-	SMAJ90CA	TVS	Vbr=100..111V, Vrwm=90V, 2.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZY	-	SMAJ100C	TVS	Vbr=111..136V, Vrwm=100V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
AZZ	-	SMAJ100CA	TVS	Vbr=111..123V, Vrwm=100V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Gal
B	-	1SS388PT	Si-diode	SBD, 40V, 100mA, Vf<0.6V(50mA)	SOD-523	8d	1a	Chm
B	-	BB555-02V	C-diode	UHF TV-tuning, 30V, 20mA, 2.1..18.7pF(28..1V)	SC-79	6d	1u	Inf
B	-	CH520S-30PT	Si-diode	SBD, 30V, 200mA, Vf<0.6V(200mA)	SOD-523	8d	1a	Chm
B	-	EP05Q06	Si-diode	SBR, 60V, 500mA, Vf<0.62V(500mA)	SOD-123	5d	1a	Nih
B	-	FSS14M	Si-diode	SBR, 40V, 1A, Vf<0.55V(1A)	MicroSMA	7d	2ja	Fag
B	-	GBLC08I	TVS	Vrwm=8V, 2A, 350W(1ms), 0.6pF	SOD-323	5d	1a	Prt
B	-	MA2H736	Si-diode	SBR, HF, 40V, 1A, Vf<0.55V(1A), 50pF, 30ns	SOD-106	1d	1a	Pan
b	-	MMSZ5229BPT	Zener diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 225mW	SOD-523	6d	1a	Chm
B	-	RB520S-30	Si-diode	SBR, 30V, 200mA, Vf<0.6V(200mA)	SOD-523	6d	1a	Rhm
B	-	TVS100W5V0D	TVS	Vrwm=5.0V, Vbr=6.2V, 8.7A, 100W(1ms)	SOD-923	7d	1d	Did
B	au	MMSZ5251BPT	Zener diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 225mW	SOD-523	6d	1a	Chm
B	ba	BAS16-03W	Si-diode	Sw, Fast, 80V, 200mA, 200mW, <6ns	SOD-323	5d	2	Inf
B	ba	BAT15-098	Si-diode	Schottky, 4V, 110mA, Vf<0.32V, <0.35pF	SOD-123	5d	2	Sie
b.	-	MMSZ5229SPT	Zener diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 225mW	SOD-523	6d	1a	Chm
B.	au	MMSZ5251SPT	Zener diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 225mW	SOD-523	6d	1a	Chm
B0	-	BZX399-C4V3	Zener diode	4.3V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
B0	-	HVC350B	C-diode	VCO, 15V, 5/15.5pF(4..1V/1MHz), <0.5Ω	UFP	6d	1b	Ren
B0	-	MM3Z2V0	Zener diode	1.80..2.15V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323FL	7d	1a	Lge
B0	-	MM3Z2V0B	Zener diode	1.80..2.15V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323FL	7d	1a	Lge
B0	-	MMPZ5224BPT	Zener diode	2.660..2.940V, Izt=5mA, Zzt=100Ω, 225mW	SOD-323	5d	1a	Chm
B010	-	STBB010	TVS	Vbr=9.5..11V, 27.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B010	-	STUB010	TVS	Vbr=9.5..11V, 27.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
B011	-	STBB011	TVS	Vbr=10.5..12.1V, 25.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B011	-	STUB011	TVS	Vbr=10.5..12.1V, 25.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
B012	-	STBB012	TVS	Vbr=11.4..13.2V, 24A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B012	-	STUB012	TVS	Vbr=11.4..13.2V, 24A, 400W(1ms)	DO-214AC	1d	1a	Eic
B013	-	STBB013	TVS	Vbr=12.4..14.3V, 22A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B013	-	STUB013	TVS	Vbr=12.4..14.3V, 22A, 400W(1ms)	DO-214AC	1d	1a	Eic
B015	-	STBB015	TVS	Vbr=14.3..16.5V, 19A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B015	-	STUB015	TVS	Vbr=14.3..16.5V, 19A, 400W(1ms)	DO-214AC	1d	1a	Eic
B016	-	STBB016	TVS	Vbr=15.2..17.6V, 17.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B016	-	STUB016	TVS	Vbr=15.2..17.6V, 17.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
B018	-	STBB018	TVS	Vbr=17.1..19.8V, 16A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B018	-	STUB018	TVS	Vbr=17.1..19.8V, 16A, 400W(1ms)	DO-214AC	1d	1a	Eic
B020	-	STBB020	TVS	Vbr=19..22V, 14.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B020	-	STUB020	TVS	Vbr=19..22V, 14.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
B022	-	STBB022	TVS	Vbr=20.9..24.2V, 13A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B022	-	STUB022	TVS	Vbr=20.9..24.2V, 13A, 400W(1ms)	DO-214AC	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
B024	-	STBB024	TVS	Vbr=22.8..26.4V, 12A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B024	-	STUB024	TVS	Vbr=22.8..26.4V, 12A, 400W(1ms)	DO-214AC	1d	1a	Eic
B027	-	STBB027	TVS	Vbr=25.7..29.7V, 10.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B027	-	STUB027	TVS	Vbr=25.7..29.7V, 10.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
B030	-	STBB030	TVS	Vbr=28.5..33V, 9.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B030	-	STUB030	TVS	Vbr=28.5..33V, 9.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
B033	-	STBB033	TVS	Vbr=31.4..36.3V, 8.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B033	-	STUB033	TVS	Vbr=31.4..36.3V, 8.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
B036	-	STBB036	TVS	Vbr=34.2..39.6V, 8.A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B036	-	STUB036	TVS	Vbr=34.2..39.6V, 8.A, 400W(1ms)	DO-214AC	1d	1a	Eic
B039	-	STBB039	TVS	Vbr=37.1..42.9V, 7.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B039	-	STUB039	TVS	Vbr=37.1..42.9V, 7.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
B043	-	STBB043	TVS	Vbr=40.9..47.3V, 6.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B043	-	STUB043	TVS	Vbr=40.9..47.3V, 6.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
B047	-	STBB047	TVS	Vbr=44.7..51.7V, 6.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B047	-	STUB047	TVS	Vbr=44.7..51.7V, 6.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
B051	-	STBB051	TVS	Vbr=48.5..56.1V 5.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B051	-	STUB051	TVS	Vbr=48.5..56.1V 5.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
B056	-	STBB056	TVS	Vbr=53.2..61.6V 5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B056	-	STUB056	TVS	Vbr=53.2..61.6V 5.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
B062	-	STBB062	TVS	Vbr=58.9..68.2V 4.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B062	-	STUB062	TVS	Vbr=58.9..68.2V 4.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
B068	-	STBB068	TVS	Vbr=64.6..74.8V 4.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B068	-	STUB068	TVS	Vbr=64.6..74.8V 4.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
B06I	-	STBB06I	TVS	Vbr=6.45..7.48V, 38A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B06I	-	STUB06I	TVS	Vbr=6.45..7.48V, 38A, 400W(1ms)	DO-214AC	1d	1a	Eic
B075	-	STBB075	TVS	Vbr=71.3..82.5V 3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B075	-	STUB075	TVS	Vbr=71.3..82.5V 3.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
B07F	-	STBB07F	TVS	Vbr=7.13..8.25V, 35.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B07F	-	STUB07F	TVS	Vbr=7.13..8.25V, 35.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
B082	-	STBB082	TVS	Vbr=77.9..90.2V 3.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B082	-	STUB082	TVS	Vbr=77.9..90.2V 3.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
B08C	-	STBB08C	TVS	Vbr=7.79..9.02V, 33A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B08C	-	STUB08C	TVS	Vbr=7.79..9.02V, 33A, 400W(1ms)	DO-214AC	1d	1a	Eic
B091	-	STBB091	TVS	Vbr=86.5..100V 3.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B091	-	STUB091	TVS	Vbr=86.5..100V 3.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
B09B	-	STBB09B	TVS	Vbr=8.65..10V, 30A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B09B	-	STUB09B	TVS	Vbr=8.65..10V, 30A, 400W(1ms)	DO-214AC	1d	1a	Eic
B0B0	-	STBB0B0	TVS	Vbr=95..110V 2.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0B0	-	STUB0B0	TVS	Vbr=95..110V 2.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
B0B1	-	STBB0B1	TVS	Vbr=105..121V, 2.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0B1	-	STUB0B1	TVS	Vbr=105..121V, 2.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
B0B2	-	STBB0B2	TVS	Vbr=114..132V, 2.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0B2	-	STUB0B2	TVS	Vbr=114..132V, 2.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
B0B3	-	STBB0B3	TVS	Vbr=124..143V, 2.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0B3	-	STUB0B3	TVS	Vbr=124..143V, 2.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
B0B5	-	STBB0B5	TVS	Vbr=143..165V, 2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0B5	-	STUB0B5	TVS	Vbr=143..165V, 2A, 400W(1ms)	DO-214AC	1d	1a	Eic
B0B6	-	STBB0B6	TVS	Vbr=152..176V, 1.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0B6	-	STUB0B6	TVS	Vbr=152..176V, 1.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
B0B7	-	STBB0B7	TVS	Vbr=161..187V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0B7	-	STUB0B7	TVS	Vbr=161..187V, 1.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
B0B8	-	STBB0B8	TVS	Vbr=171..198V, 1.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0B8	-	STUB0B8	TVS	Vbr=171..198V, 1.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
B0D0	-	STBB0D0	TVS	Vbr=190..220V 1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0D0	-	STUB0D0	TVS	Vbr=190..220V 1.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
B0D2	-	STBB0D2	TVS	Vbr=209..242V 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0D2	-	STUB0D2	TVS	Vbr=209..242V 1.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
B0D5	-	STBB0D5	TVS	Vbr=237..275V 1.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0D5	-	STUB0D5	TVS	Vbr=237..275V 1.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
B0D8	-	STBB0D8	TVS	Vbr=266..308V 1.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0D8	-	STUB0D8	TVS	Vbr=266..308V 1.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
B0E0	-	STBB0E0	TVS	Vbr=285..330V 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0E0	-	STUB0E0	TVS	Vbr=285..330V 1.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
B0E2	-	STBB0E2	TVS	Vbr=304..352V 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0E2	-	STUB0E2	TVS	Vbr=304..352V 1.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
B0E5	-	STBB0E5	TVS	Vbr=332..385V 0.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0E5	-	STUB0E5	TVS	Vbr=332..385V 0.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
B0G0	-	STBB0G0	TVS	Vbr=380..440V 0.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0G0	-	STUB0G0	TVS	Vbr=380..440V 0.9A, 400W(1ms)	DO-214AC	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
B0G4	-	STBB0G4	TVS	Vbr=418..484V 0.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B0G4	-	STUB0G4	TVS	Vbr=418..484V 0.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
B1	-	BZX399-C1V8	Zener diode	1.8V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
B1	-	FSS22	Si-diode	SBR, 20V, 2A, Vf<0.7V(2A)	DO-214AA	1d	2j	Fag
B1	-	HVC355B	C-diode	VCO, 15V, 2.55/6.4pF(4..1V/1MHz), <0.6Ω	UFP	6d	1b	Ren
B1	-	MAZF033	Zener diode	3.1..3.5V, Zzt=130Ω(5mA), 120mW	S-Mini	8d	1a	Pan
B1	-	MAZN033	Zener diode	3.1..3.5V, Zzt=130Ω(5mA), 120mW	SSMini2	7d	1a	Pan
B1	-	MM3Z5223B	Zener diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Bts
B1	-	MM3Z5223BH	Zener diode	2.57..2.84V, Izt=20mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Zow
B1	-	PTVS54VS1UR	TVS	Vrwm=54V, Vbr=60.0..66.30V, 4.6A, 400W (1ms)	SOD-123W	7d	1a	Nxp
B1	-	SDB310D	Si-diode	SBR, 30V, 200mA, 150mW, <10pF, <5ns	SOD-323	5d	1a	Auk
B1	-	UDZ2V0B	Zener diode	2V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
B10A	-	1KSMB82A	TVS	Vrwm=70.10V, Vbr=77.90..86.10V, 8.8A, 1000W(1ms)	DO-214AA	1d	2s	Lif
B10A	-	P6SBMJ16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19A, 600W(1ms)	DO-214AA	1d	1a	Chm
B10B	-	1KSMB91A	TVS	Vrwm=77.80V, Vbr=86.50..95.50V, 8.0A, 1000W(1ms)	DO-214AA	1d	2s	Lif
B10C	-	1KSMB100A	TVS	Vrwm=85.50V, Vbr=95.0..105.0V, 7.3A, 1000W(1ms)	DO-214AA	1d	2s	Lif
B10C	-	P6SBMJ16CA	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B10D	-	1KSMB110A	TVS	Vrwm=94V, Vbr=105.0..116.0V, 6.6A, 1000W(1ms)	DO-214AA	1d	2s	Lif
B10E	-	1KSMB120A	TVS	Vrwm=102.0V, Vbr=114.0..126.0V, 6.1A, 1000W(1ms)	DO-214AA	1d	2s	Lif
B10F	-	1KSMB130A	TVS	Vrwm=111.0V, Vbr=124.0..137.0V, 5.6A, 1000W(1ms)	DO-214AA	1d	2s	Lif
B10G	-	1KSMB150A	TVS	Vrwm=128.0V, Vbr=143.0..158.0V, 4.8A, 1000W(1ms)	DO-214AA	1d	2s	Lif
B10H	-	1KSMB160A	TVS	Vrwm=136V, Vbr=152.0..168.0V, 4.6A, 1000W(1ms)	DO-214AA	1d	2s	Lif
B10I	-	1KSMB170A	TVS	Vrwm=144.5V, Vbr=162.0..179.0V, 4.3A, 1000W(1ms)	DO-214AA	1d	2s	Lif
B10J	-	1KSMB180A	TVS	Vrwm=153.0V, Vbr=171.0..189.0V, 4.1A, 1000W(1ms)	DO-214AA	1d	2s	Lif
B110	-	MBRS1100	Si-diode	SBR, 100V, 1A, Vf<0.75V(1A)	DO-214AA	1d	1a	Mot
B110	-	SBM110PT	Si-diode	SBR, 100V, 1A, Vf<0.8V(1A)	DO-214AA	1d	1a	Chm
B110	-	SMAB110	Si-diode	SBR, 100V, 1A, Vf<0.8V(1A)	DO-214AC	1d	1a	Kec
B11A	-	P6SBMJ18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17A, 600W(1ms)	DO-214AA	1d	1a	Chm
B11C	-	P6SBMJ18CA	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B12	-	B120	Si-diode	SBR, 20V, 1A, Vf<0.52V(1A)	DO-214AC	1d	1k	Vs
B12	-	MBRS120	Si-diode	SBR, 20V, 1A, Vf=0.52V(1A)	403A	3d	1s	Ons
B12A	-	P6SBMJ20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15A, 600W(1ms)	DO-214AA	1d	1a	Chm
B12C	-	P6SBMJ20CA	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B12L	-	SBM12LPT	Si-diode	SBR, 20V, 1A, Vf<0.38V(1A)	DO-214AA	1d	1a	Chm
B13	-	B130	Si-diode	SBR, 30V, 1A, Vf<0.52V(1A)	DO-214AC	1d	1k	Vs
B13	-	MBRS130	Si-diode	SBR, 30V, 1A, Vf=0.55V(1A)	403A-03	3d	1s	Ons
B13	-	SMAB13	Si-diode	SBR, 30V, 1A, Vf<0.42V(1A)	DO-214AC	1d	1a	Kec
B130	-	MBRS130	Si-diode	SBR, 30V, 1A, Vf=0.55V(1A)	403A	3d	1s	Mot
B13A	-	P6SBMJ22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14A, 600W(1ms)	DO-214AA	1d	1a	Chm
B13C	-	P6SBMJ22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B13L	-	SBM13LPT	Si-diode	SBR, 30V, 1A, Vf<0.38V(1A)	DO-214AA	1d	1a	Chm
B14	-	B140	Si-diode	SBR, 40V, 1A, Vf<0.52V(1A)	DO-214AC	1d	1k	Vs
B14	-	MBRA140	Si-diode	SBR, 40V, 1A, Vf<0.55V(1A)	DO-214AC	1d	1f	Ons
B14	-	MBRS140	Si-diode	SBR, 40V, 1A, Vf=0.55V(1A)	403A-03	3d	1s	Ons
B14	-	SMAB14	Si-diode	SBR, 40V, 1A, Vf<0.5V(1A)	DO-214AC	1d	1a	Kec
B140	-	MBRS140	Si-diode	SBR, 40V, 1A, Vf=0.55V(1A)	403A-03	3d	1s	Mot
B14A	-	P6SBMJ24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13A, 600W(1ms)	DO-214AA	1d	1a	Chm
B14C	-	P6SBMJ24CA	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B14L	-	MBRS140L	Si-diode	SBR, 40V, 1A, Vf=0.55V(1A)	403A-03	3d	1s	Ons
B14L	-	SBM14LPT	Si-diode	SBR, 40V, 1A, Vf<0.38V(1A)	DO-214AA	1d	1a	Chm
B15	-	B150	Si-diode	SBR, 50V, 1A, Vf<0.75V(1A)	DO-214AC	1d	1k	Vs
B15A	-	P6SBMJ27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 600W(1ms)	DO-214AA	1d	1a	Chm
B15C	-	P6SBMJ27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B16	-	B160	Si-diode	SBR, 60V, 1A, Vf<0.75V(1A)	DO-214AC	1d	1k	Vs
B16	-	MBRA160	Si-diode	SBR, 60V, 1A, Vf<0.47V(1A)	DO-214AC	1d	1f	Ons
B16	-	SMAB16	Si-diode	SBR, 60V, 1A, Vf<0.58V(1A)	DO-214AC	1d	1a	Kec
B16A	-	P6SBMJ30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10A, 600W(1ms)	DO-214AA	1d	1a	Chm
B16C	-	P6SBMJ30CA	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B17A	-	P6SBMJ33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9A, 600W(1ms)	DO-214AA	1d	1a	Chm
B17C	-	P6SBMJ33CA	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B18A	-	P6SBMJ36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 600W(1ms)	DO-214AA	1d	1a	Chm
B18C	-	P6SBMJ36CA	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B19	-	MBRS190	Si-diode	SBR, 90V, 1A, Vf=0.75V(1A)	403A-03	3d	1s	Ons
B19A	-	P6SBMJ39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 600W(1ms)	DO-214AA	1d	1a	Chm
B19C	-	P6SBMJ39CA	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B1A	-	P6SBMJ6.8A	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 40A, 600W(1ms)	DO-214AA	1d	1a	Chm
B1C	-	MBRS1100	Si-diode	SBR, 100V, 1A, Vf=0.75V(1A)	403A	3d	1s	Ons
B1C	-	P6SBMJ6.8CA	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 40A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B1E2	-	MBRA120E	Si-diode	SBR, 20V, 1A, Vf<0.45V(1A)	DO-214AC	1d	1f	Ons
B1FD	-	CD1408-F1200	Si-diode	Rectifier, 200V, 1A, Vf=1.3V(1A), 300ns, 15pF	1408	14d	1v	Brn

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
B1FG	-	CD1408-F1400	Si-diode	Rectifier, 400V, 1A, Vf=1.3V(1A), 300ns, 15pF	1408	14d	1v	Brn
B1FJ	-	CD1408-F1600	Si-diode	Rectifier, 600V, 1A, Vf=1.3V(1A), 300ns, 15pF	1408	14d	1v	Brn
B1FK	-	CD1408-F1800	Si-diode	Rectifier, 800V, 1A, Vf=1.3V(1A), 300ns, 15pF	1408	14d	1v	Brn
B1FM	-	CD1408-F11000	Si-diode	Rectifier, 1000V, 1A, Vf=1.3V(1A), 300ns, 15pF	1408	14d	1v	Brn
B1L	-	FSS22L	Si-diode	SBR, 20V, 2A, Vf<0.5V(2A)	DO-219AA	7d	2n	Fag
B1L2	-	MBRA120	Si-diode	SBR, 20V, 1A, Vf<0.3V(1A)	DO-214AC	1d	1f	Ons
B1L3	-	MBRA130	Si-diode	SBR, 30V, 1A, Vf<0.41V(1A)	DO-214AC	1d	1f	Ons
B2	-	B120LW	Si-diode	SBR, 20V, 1A, Vf<0.43V(1A)	SOD-123	5d	1a	Cit
B2	-	BZX399-C2V0	Zener diode	2.0V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
B2	-	FSS23	Si-diode	SBR, 30V, 2A, Vf<0.7V(2A)	DO-214AA	1d	2j	Fag
B2	-	MAZF036	Zener diode	3.4..3.8V, Zzt=130Ω(5mA), 120mW	S-Mini	8d	1a	Pan
B2	-	MAZN036	Zener diode	3.4..3.8V, Zzt=130Ω(5mA), 120mW	SSMini2	7d	1a	Pan
B2	-	MBR0520	Si-diode	SBR, 20V, 500mA, Vf=0.33V(500mA)	SOD-123	5d	1a	Ons
B2	-	MM3Z5242B	Zener diode	12V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Bts
B2	-	MM3Z5242BH	Zener diode	11.4..12.6V, Izt=20mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Zow
B2	-	MSCD052	Si-diode	SBR, 20V, 0.5A, Vf<0.44V(0.5A)	0805	14d	1v	Zow
B2	-	PTVS58VS1UR	TVS	Vrwm=58V, Vbr=64.40..71.20V, 4.3A, 400W (1ms)	SOD-123W	7d	1a	Nxp
B2	-	SMBYT01-200	Si-diode	Rectifier, Fast-Recovery, 200V, 1A, Vf<0.71V(1A), <25ns	DO-214AA	1d	1q	Ste
B2	-	SSCD052	Si-diode	SBR, 20V, 500mA, Vf<0.42V(500mA)	1206	14d	1v	Zow
B2	-	UDZ2V2B	Zener diode	2.2V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
B20	-	SMBYW01-200	Si-diode	Rectifier, Fast-Recovery, 200V, 1A, Vf<0.71V(1A), <25ns	DO-214AA	1d	1q	Ste
B20A	-	P6SBMJ43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 600W(1ms)	DO-214AA	1d	1a	Chm
B20C	-	P6SBMJ43CA	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B210	-	SBM210PT	Si-diode	SBR, 100V, 2A, Vf<0.8V(2A)	DO-214AA	1d	1a	Chm
B210	-	SMAB210	Si-diode	SBR, 100V, 2A, Vf<0.8V(2A)	DO-214AC	1d	1a	Kec
B2100	aa	CD1206-B2100	Si-diode	SBR, 100V, 2A, Vf=0.85V(2A)	1206	2d	1v	Brn
B21A	-	P6SBMJ47A	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 5.0A, 600W(1ms)	DO-214AA	1d	1a	Chm
B21C	-	P6SBMJ47CA	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 5.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B220	aa	CD1206-B220	Si-diode	SBR, 20V, 2A, Vf=0.5V(2A)	1206	2d	1v	Brn
B22A	-	P6SBMJ51A	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 600W(1ms)	DO-214AA	1d	1a	Chm
B22C	-	P6SBMJ51CA	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B23	-	B230LA	Si-diode	SBR, 30V, 2A, Vf<0.55V(2A)	DO-214AC	1d	1k	Vs
B23A	-	P6SBMJ56A	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 600W(1ms)	DO-214AA	1d	1a	Chm
B23C	-	P6SBMJ56CA	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B24	-	B240A	Si-diode	SBR, 40V, 2A, Vf<0.55V(2A)	DO-214AC	1d	1k	Vs
B240	aa	CD1206-B240	Si-diode	SBR, 40V, 2A, Vf=0.5V(2A)	1206	2d	1v	Brn
B24A	-	P6SBMJ62A	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 600W(1ms)	DO-214AA	1d	1a	Chm
B24C	-	P6SBMJ62CA	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B25A	-	P6SBMJ68A	TVS	Vbr=64.6..71.4V, Vrwm=58.0V, 4.6A, 600W(1ms)	DO-214AA	1d	1a	Chm
B25C	-	P6SBMJ68CA	TVS	Vbr=64.6..71.4V, Vrwm=58.0V, 4.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B26	-	MBRS260	Si-diode	SBR, 60V, 2A, Vf=0.51V(2A)	403A-03	3d	1s	Ons
B260	aa	CD1206-B260	Si-diode	SBR, 60V, 2A, Vf=0.7V(2A)	1206	2d	1v	Brn
B26A	-	P6SBMJ75A	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 600W(1ms)	DO-214AA	1d	1a	Chm
B26C	-	P6SBMJ75CA	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B27A	-	P6SBMJ82A	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 600W(1ms)	DO-214AA	1d	1a	Chm
B27C	-	P6SBMJ82CA	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B28A	-	P6SBMJ91A	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 600W(1ms)	DO-214AA	1d	1a	Chm
B28C	-	P6SBMJ91CA	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B29A	-	P6SBMJ100A	TVS	Vbr=95..105V, Vrwm=85.5V, 3.1A, 600W(1ms)	DO-214AA	1d	1a	Chm
B29C	-	P6SBMJ100CA	TVS	Vbr=95..105V, Vrwm=85.5V, 3.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B2A	-	P6SBMJ7.5A	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 37A, 600W(1ms)	DO-214AA	1d	1a	Chm
B2C	-	P6SBMJ7.5CA	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 37A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B2E1	-	MBRA210E	Si-diode	SBR, 10V, 2A, Vf<0.38V(1A)	DO-214AA	1d	1f	Ons
B2L	-	FSS23L	Si-diode	SBR, 30V, 2A, Vf<0.5V(2A)	DO-219AA	7d	2n	Fag
B2L1	-	MBRA210	Si-diode	SBR, 10V, 2A, Vf<0.23V(1A)	DO-214AA	1d	1f	Ons
B3	-	BZT52H-C2V4	Zener diode	2.4V±5%, Izt=5mA, Zzt=85Ω, 375mW	SOD-123FL	7d	1a	Phi
B3	-	BZX399-C2V2	Zener diode	2.2V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
B3	-	FSS24	Si-diode	SBR, 40V, 2A, Vf<0.7V(2A)	DO-214AA	1d	2j	Fag
B3	-	HVC369B	C-diode	VCO, 15V, 1.85/4.65pF(4..1V/1MHz), <0.5Ω	UFP	6d	1a	Ren
B3	-	MAZF039	Zener diode	3.7..4.1V, Zzt=130Ω(5mA), 120mW	S-Mini	8d	1a	Pan
B3	-	MAZN039	Zener diode	3.7..4.1V, Zzt=130Ω(5mA), 120mW	SSMini2	7d	1a	Pan
B3	-	MBR0530	Si-diode	SBR, 30V, 500mA, Vf=0.43V(500mA)	SOD-123	5d	1a	Ons
B3	-	MBRA130	Si-diode	SBR, 30V, 1A, Vf<0.41V(1A)	403B-01	3d	1s	Mot
B3	-	MM3Z5263B	Zener diode	56V±5%, Izt=2.2mA, Zzt=150Ω, 200mW	SOD-323FL	7d	1a	Bts
B3	-	MM3Z5263BH	Zener diode	53.2..58.8V, Izt=2.2mA, Zzt=150Ω, 300mW	SOD-323	5d	1a	Zow
B3	-	MSCD053	Si-diode	SBR, 30V, 0.5A, Vf<0.46V(0.5A)	0805	14d	1v	Zow
B3	-	PTVS60VS1UR	TVS	Vrwm=60V, Vbr=66.70..73.70V, 4.1A, 400W (1ms)	SOD-123W	7d	1a	Nxp
B3	-	SMBYT01-300	Si-diode	Rectifier, Fast-Recovery, 300V, 1A, Vf<0.85V(1A), <25ns	DO-214AA	1d	1q	Ste
B3	-	UDZ2V4B	Zener diode	2.4V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
B30A	-	P6SBMJ110A	TVS	Vbr=105..116V, Vrwm=94V, 2.8A, 600W(1ms)	DO-214AA	1d	1a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
B30C	-	P6SBMJ110CA	TVS	Vbr=105..116V, Vrwm=94V, 2.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B310	-	MBRS3100	Si-diode	SBR, 100V, 3A, Vf=0.79V(2A)	403A-03	3d	1s	Ons
B310	-	SBM310PT	Si-diode	SBR, 100V, 3A, Vf<0.8V(3A)	DO-214AA	1d	1a	Chm
B31A	-	P6SBMJ120A	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 600W(1ms)	DO-214AA	1d	1a	Chm
B31C	-	P6SBMJ120CA	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B32	-	MBRS320	Si-diode	SBR, 20V, 3A, Vf=0.5V(2A)	403A-03	3d	1s	Ons
B320	aa	CD214C-B320	Si-diode	Rectifier, 20V, 3A, Vf<0.5V(3A), <250pF	DO-214AB	1d	1a	Brn
B320B	aa	CD214B-B320	Si-diode	Rectifier, 20V, 3A, Vf<0.5V(3A), <250pF	DO-214AA	1d	1a	Brn
B32A	-	P6SBMJ130A	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 600W(1ms)	DO-214AA	1d	1a	Chm
B32C	-	P6SBMJ130CA	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B33	-	B330LA	Si-diode	SBR, 30V, 3A, Vf<0.55V(3A)	DO-214AC	1d	1k	Vs
B33	-	MBRS110	Si-diode	SBR, 100V, 1A, Vf=0.75V(1A)	403A-03	3d	1s	Mot
B33	-	MBRS330	Si-diode	SBR, 30V, 3A, Vf=0.5V(2A)	403A-03	3d	1s	Ons
B33	-	SMAB33	Si-diode	SBR, 30V, 3A, Vf<0.45V(3A)	DO-214AC	1d	1a	Kec
B330	aa	CD214C-B330	Si-diode	Rectifier, 30V, 3A, Vf<0.5V(3A), <250pF	DO-214AB	1d	1a	Brn
B330B	aa	CD214B-B330	Si-diode	Rectifier, 30V, 3A, Vf<0.5V(3A), <250pF	DO-214AA	1d	1a	Brn
B33A	-	P6SBMJ150A	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 600W(1ms)	DO-214AA	1d	1a	Chm
B33C	-	P6SBMJ150CA	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B34	-	B340A	Si-diode	SBR, 40V, 3A, Vf<0.55V(3A)	DO-214AC	1d	1k	Vs
B34	-	B340LB	Si-diode	SBR, 40V, 3A, Vf<0.45V(3A)	DO-214AA	1d	1k	Vs
B34	-	MBRS340	Si-diode	SBR, 40V, 3A, Vf=0.52V(3A)	403A-03	3d	1s	Mot
B34	-	SMAB34	Si-diode	SBR, 40V, 3A, Vf<0.52V(3A)	DO-214AC	1d	1a	Kec
B340	aa	CD214C-B340	Si-diode	Rectifier, 40V, 3A, Vf<0.5V(3A), <250pF	DO-214AB	1d	1a	Brn
B340B	aa	CD214B-B340	Si-diode	Rectifier, 40V, 3A, Vf<0.5V(3A), <250pF	DO-214AA	1d	1a	Brn
B34A	-	P6SBMJ160A	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 600W(1ms)	DO-214AA	1d	1a	Chm
B34C	-	P6SBMJ160CA	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B34L	-	SBM34LPT	Si-diode	SBR, 40V, 3A, Vf<0.4V(3A)	DO-214AA	1d	1a	Chm
B35	-	B350A	Si-diode	SBR, 50V, 3A, Vf<0.72V(3A)	DO-214AC	1d	1k	Vs
B35	-	B350B	Si-diode	SBR, 50V, 3A, Vf<0.66V(3A)	DO-214AA	1d	1k	Vs
B35	-	B360A	Si-diode	SBR, 60V, 3A, Vf<0.72V(3A)	DO-214AC	1d	1k	Vs
B35	-	B360B	Si-diode	SBR, 60V, 3A, Vf<0.66V(3A)	DO-214AA	1d	1k	Vs
B350	aa	CD214C-B350	Si-diode	Rectifier, 50V, 3A, Vf<0.7V(3A), <250pF	DO-214AB	1d	1a	Brn
B350B	aa	CD214B-B350	Si-diode	Rectifier, 50V, 3A, Vf<0.7V(3A), <250pF	DO-214AA	1d	1a	Brn
B35A	-	P6SBMJ170A	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 600W(1ms)	DO-214AA	1d	1a	Chm
B35C	-	P6SBMJ170CA	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B36	-	MBRS360	Si-diode	SBR, 60V, 3A, Vf=0.74V(3A)	403A-03	3d	1s	Mot
B36	-	SMAB36	Si-diode	SBR, 60V, 3A, Vf<0.6V(3A)	DO-214AC	1d	1a	Kec
B360	aa	CD214C-B360	Si-diode	Rectifier, 60V, 3A, Vf<0.7V(3A), <250pF	DO-214AB	1d	1a	Brn
B360B	aa	CD214B-B360	Si-diode	Rectifier, 60V, 3A, Vf<0.7V(3A), <250pF	DO-214AA	1d	1a	Brn
B36A	-	P6SBMJ180A	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 600W(1ms)	DO-214AA	1d	1a	Chm
B36C	-	P6SBMJ180CA	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B37A	-	P6SBMJ200A	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 600W(1ms)	DO-214AA	1d	1a	Chm
B37C	-	P6SBMJ200CA	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B3A	-	P6SBMJ8.2A	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 35A, 600W(1ms)	DO-214AA	1d	1a	Chm
B3C	-	P6SBMJ8.2CA	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 35A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B3L	-	FSS24L	Si-diode	SBR, 40V, 2A, Vf<0.5V(2A)	DO-219AA	7d	2n	Fag
B4	-	B140LW	Si-diode	SBR, 40V, 1A, Vf<0.45V(1A)	SOD-123	5d	1a	Cit
B4	-	BZT52H-C2V7	Zener diode	2.7V±5%, Izt=5mA, Zzt=83Ω, 375mW	SOD-123FL	7d	1a	Phi
B4	-	BZX399-C2V4	Zener diode	2.4V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
B4	-	FSS25	Si-diode	SBR, 50V, 2A, Vf<0.7V(2A)	DO-214AA	1d	2j	Fag
B4	-	MBR0540	Si-diode	SBR, 40V, 500mA, Vf=0.43V(500mA)	SOD-123	5d	1a	Ons
B4	-	MBRA140	Si-diode	SBR, 40V, 1A, Vf<0.55V(1A)	DO-214AC	3d	1a	Mot
B4	-	MM1Z5223B	Zener diode	2.57..2.84V, Izt=20mA, Zzt=30Ω, 500mW	SOD-323FL	7d	1a	Eic
B4	-	MM1Z5223BH	Zener diode	2.57..2.84V, Izt=20mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Zow
B4	-	MMSZ5223B	Zener diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Eic
B4	-	MSCD054	Si-diode	SBR, 40V, 0.5A, Vf<0.48V(0.5A)	0805	14d	1v	Zow
B4	-	PTVS64VS1UR	TVS	Vrwm=64V, Vbr=71.10..78.60V, 3.9A, 400W (1ms)	SOD-123W	7d	1a	Nxp
B4	-	SMBYT01-400	Si-diode	Rectifier, Fast-Recovery, 400V, 1A, Vf<1.05V(1A), <25ns	DO-214AA	1d	1q	Ste
B4	-	SSCD054	Si-diode	SBR, 40V, 500mA, Vf<0.48V(500mA)	1206	14d	1v	Zow
B4	-	UDZ2V7B	Zener diode	2.7V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
B4A	-	P6SBMJ9.1A	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 31A, 600W(1ms)	DO-214AA	1d	1a	Chm
B4C	-	P6SBMJ9.1CA	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 31A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B4E1	-	MBRS410E	Si-diode	SBR, 10V, 4A, Vf=0.5V(3A)	403A-03	3d	1s	Ons
B4L1	-	MBRS410	Si-diode	SBR, 10V, 4A, Vf=0.33V(3A)	403A-03	3d	1s	Ons
B5	-	BZT52H-C3V0	Zener diode	3.0V±5%, Izt=5mA, Zzt=95Ω, 375mW	SOD-123FL	7d	1a	Phi
B5	-	BZX399-C2V7	Zener diode	2.7V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
B5	-	BZX584B6V8	Zener diode	6.66..6.94V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523FL	7d	1a	Tac
B5	-	FSS26	Si-diode	SBR, 60V, 2A, Vf<0.7V(2A)	DO-214AA	1d	2j	Fag
B5	-	HVC372B	C-diode	VCO, 15V, 7/15pF(4..1V/1MHz), <0.4Ω	UFP	6d	1a	Ren
B5	-	MM1Z5242B	Zener diode	11.40..12.60V, Izt=20mA, Zzt=30Ω, 500mW	SOD-323FL	7d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
B5	-	MM1Z5242BH	Zener diode	11.4..12.6V, Izt=20mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Zow
B5	-	MM5Z6V8B	Zener diode	6.66..6.94V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523FL	7d	1a	Tac
B5	-	MMSZ5242B	Zener diode	12V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Eic
B5	-	UDZ3V0B	Zener diode	3V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
B510	-	SBM510PT	Si-diode	SBR, 100V, 5A, Vf<0.8V(5A)	DO-214AA	1d	1a	Chm
B510	-	STBB510	TVS	Vbr=9.5..10.5V, 27.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B510	-	STUB510	TVS	Vbr=9.5..10.5V, 27.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
B511	-	STBB511	TVS	Vbr=10.5..11.6V, 25.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B511	-	STUB511	TVS	Vbr=10.5..11.6V, 25.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
B512	-	STBB512	TVS	Vbr=11.4..12.6V, 24A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B512	-	STUB512	TVS	Vbr=11.4..12.6V, 24A, 400W(1ms)	DO-214AC	1d	1a	Eic
B513	-	STBB513	TVS	Vbr=12.4..13.7V, 22A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B513	-	STUB513	TVS	Vbr=12.4..13.7V, 22A, 400W(1ms)	DO-214AC	1d	1a	Eic
B515	-	STBB515	TVS	Vbr=14.3..15.8V, 19A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B515	-	STUB515	TVS	Vbr=14.3..15.8V, 19A, 400W(1ms)	DO-214AC	1d	1a	Eic
B516	-	STBB516	TVS	Vbr=15.2..16.8V, 17.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B516	-	STUB516	TVS	Vbr=15.2..16.8V, 17.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
B518	-	STBB518	TVS	Vbr=17.1..18.9V, 16A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B518	-	STUB518	TVS	Vbr=17.1..18.9V, 16A, 400W(1ms)	DO-214AC	1d	1a	Eic
B520	-	STBB520	TVS	Vbr=19..21V, 14.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B520	-	STUB520	TVS	Vbr=19..21V, 14.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
B522	-	STBB522	TVS	Vbr=20.9..23.1V, 13A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B522	-	STUB522	TVS	Vbr=20.9..23.1V, 13A, 400W(1ms)	DO-214AC	1d	1a	Eic
B524	-	STBB524	TVS	Vbr=22.8..25.2V, 12A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B524	-	STUB524	TVS	Vbr=22.8..25.2V, 12A, 400W(1ms)	DO-214AC	1d	1a	Eic
B527	-	STBB527	TVS	Vbr=25.7..28.4V, 10.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B527	-	STUB527	TVS	Vbr=25.7..28.4V, 10.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
B530	-	STBB530	TVS	Vbr=28.5..31.5V, 9.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B530	-	STUB530	TVS	Vbr=28.5..31.5V, 9.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
B533	-	STBB533	TVS	Vbr=31.4..34.7V, 8.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B533	-	STUB533	TVS	Vbr=31.4..34.7V, 8.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
B536	-	STBB536	TVS	Vbr=34.2..37.8V, 8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B536	-	STUB536	TVS	Vbr=34.2..37.8V, 8A, 400W(1ms)	DO-214AC	1d	1a	Eic
B539	-	STBB539	TVS	Vbr=37.1..41V, 7.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B539	-	STUB539	TVS	Vbr=37.1..41V, 7.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
B543	-	STBB543	TVS	Vbr=40.9..45.2V 6.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B543	-	STUB543	TVS	Vbr=40.9..45.2V 6.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
B547	-	STBB547	TVS	Vbr=44.7..49.4V 6.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B547	-	STUB547	TVS	Vbr=44.7..49.4V 6.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
B551	-	STBB551	TVS	Vbr=48.5..53.6V 5.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B551	-	STUB551	TVS	Vbr=48.5..53.6V 5.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
B556	-	STBB556	TVS	Vbr=53.2..58.8V 5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B556	-	STUB556	TVS	Vbr=53.2..58.8V 5.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
B562	-	STBB562	TVS	Vbr=58.9..65.1V 4.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B562	-	STUB562	TVS	Vbr=58.9..65.1V 4.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
B568	-	STBB568	TVS	Vbr=64.6..71.4V 4.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B568	-	STUB568	TVS	Vbr=64.6..71.4V 4.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
B56I	-	STBB56I	TVS	Vbr=6.45..7.14V, 38A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B56I	-	STUB56I	TVS	Vbr=6.45..7.14V, 38A, 400W(1ms)	DO-214AC	1d	1a	Eic
B575	-	STBB575	TVS	Vbr=71.3..78.8V 3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B575	-	STUB575	TVS	Vbr=71.3..78.8V 3.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
B57F	-	STBB57F	TVS	Vbr=7.13..7.88V, 35.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B57F	-	STUB57F	TVS	Vbr=7.13..7.88V, 35.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
B582	-	STBB582	TVS	Vbr=77.9..86.1V 3.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B582	-	STUB582	TVS	Vbr=77.9..86.1V 3.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
B58C	-	STBB58C	TVS	Vbr=7.79..8.61V, 33A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B58C	-	STUB58C	TVS	Vbr=7.79..8.61V, 33A, 400W(1ms)	DO-214AC	1d	1a	Eic
B591	-	STBB591	TVS	Vbr=86.5..95.5V 3.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B591	-	STUB591	TVS	Vbr=86.5..95.5V 3.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
B59B	-	STBB59B	TVS	Vbr=8.65..9.55V, 30A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B59B	-	STUB59B	TVS	Vbr=8.65..9.55V, 30A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5A	-	P6SBMJ10A	TVS	Vbr=9.5..10.5V, Vrwm=8.55V, 29A, 600W(1ms)	DO-214AA	1d	1a	Chm
B5B0	-	STBB5B0	TVS	Vbr=95..105V 2.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5B0	-	STUB5B0	TVS	Vbr=95..105V 2.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5B1	-	STBB5B1	TVS	Vbr=105..116V 2.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5B1	-	STUB5B1	TVS	Vbr=105..116V 2.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5B2	-	STBB5B2	TVS	Vbr=114..126V 2.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5B2	-	STUB5B2	TVS	Vbr=114..126V 2.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5B3	-	STBB5B3	TVS	Vbr=124..137V 2.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5B3	-	STUB5B3	TVS	Vbr=124..137V 2.2A, 400W(1ms)	DO-214AC	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
B5B5	-	STBB5B5	TVS	Vbr=143..158V 2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5B5	-	STUB5B5	TVS	Vbr=143..158V 2A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5B6	-	STBB5B6	TVS	Vbr=152..168V 1.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5B6	-	STUB5B6	TVS	Vbr=152..168V 1.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5B7	-	STBB5B7	TVS	Vbr=161..179V 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5B7	-	STUB5B7	TVS	Vbr=161..179V 1.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5B8	-	STBB5B8	TVS	Vbr=171..189V 1.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5B8	-	STUB5B8	TVS	Vbr=171..189V 1.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5C	-	P6SBMJ10CA	TVS	Vbr=9.5..10.5V, Vrwm=8.55V, 29A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B5D0	-	STBB5D0	TVS	Vbr=190..210V 1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5D0	-	STUB5D0	TVS	Vbr=190..210V 1.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5D2	-	STBB5D2	TVS	Vbr=209..231V 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5D2	-	STUB5D2	TVS	Vbr=209..231V 1.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5D5	-	STBB5D5	TVS	Vbr=237..263V 1.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5D5	-	STUB5D5	TVS	Vbr=237..263V 1.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5D8	-	STBB5D8	TVS	Vbr=266..294V 1.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5D8	-	STUB5D8	TVS	Vbr=266..294V 1.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5E0	-	STBB5E0	TVS	Vbr=285..315V 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5E0	-	STUB5E0	TVS	Vbr=285..315V 1.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5E2	-	STBB5E2	TVS	Vbr=304..336V 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5E2	-	STUB5E2	TVS	Vbr=304..336V 1.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5E5	-	STBB5E5	TVS	Vbr=332..368V 0.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5E5	-	STUB5E5	TVS	Vbr=332..368V 0.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5G0	-	STBB5G0	TVS	Vbr=380..420V 0.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5G0	-	STUB5G0	TVS	Vbr=380..420V 0.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5G4	-	STBB5G4	TVS	Vbr=418..462V 0.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
B5G4	-	STUB5G4	TVS	Vbr=418..462V 0.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
B5L	-	FSS26L	Si-diode	SBR, 60V, 2A, Vf<0.7V(2A)	DO-219AA	7d	2n	Fag
B6	-	BZT52H-C3V3	Zener diode	3.3V±5%, Izt=5mA, Zzt=95Ω, 375mW	SOD-123FL	7d	1a	Phi
B6	-	BZX399-C3V0	Zener diode	3.0V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
B6	-	MM1Z5263B	Zener diode	53.20..58.80V, Izt=2.2mA, Zzt=150Ω, 500mW	SOD-323FL	7d	1a	Eic
B6	-	MM1Z5263BH	Zener diode	53.2..58.8V, Izt=2.2mA, Zzt=150Ω, 500mW	SOD-123	5d	1a	Zow
B6	-	MMSZ5263B	Zener diode	56V±5%, Izt=2.2mA, Zzt=150Ω, 500mW	SOD-123	5d	1a	Eic
B6	-	TFZ3.6B	Zener diode	3.60..3.845V, Izt=20mA, Zzt=60Ω, 500mW	TUMD2	7d	2x	Rhm
B6	-	UDZ3V3B	Zener diode	3.3V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
B6A	-	P6SBMJ11A	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 27A, 600W(1ms)	DO-214AA	1d	1a	Chm
B6C	-	P6SBMJ11CA	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 27A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B7	-	BZT52H-C3V6	Zener diode	3.6V±5%, Izt=5mA, Zzt=95Ω, 375mW	SOD-123FL	7d	1a	Phi
B7	-	BZX399-C3V3	Zener diode	3.3V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
B7	-	TFZ3.9B	Zener diode	3.89..4.16V, Izt=20mA, Zzt=50Ω, 500mW	TUMD2	7d	2x	Rhm
B7	-	UDZ3V6B	Zener diode	3.6V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
B7A	-	P6SBMJ12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25A, 600W(1ms)	DO-214AA	1d	1a	Chm
B7C	-	P6SBMJ12CA	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B8	-	BZT52C3V0WT	Zener diode	2.85..3.15V, Izt=5mA, Zzt=95Ω, 200mW	SOD-523	6d	1a	Ttr
B8	-	BZT52H-C3V9	Zener diode	3.9V±5%, Izt=5mA, Zzt=95Ω, 375mW	SOD-123FL	7d	1a	Phi
B8	-	BZX399-C3V6	Zener diode	3.6V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
B8	-	MM5Z3V0	Zener diode	3.0V±5%, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	6d	1a	Eic
B8	-	MM5Z3V0H	Zener diode	2.8..3.2V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	6d	1a	Zow
B8	-	TFZ4.3B	Zener diode	4.17..4.43V, Izt=20mA, Zzt=40Ω, 500mW	TUMD2	7d	2x	Rhm
B8	-	UDZ3V9B	Zener diode	3.9V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
B8A	-	P6SBMJ13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23A, 600W(1ms)	DO-214AA	1d	1a	Chm
B8C	-	P6SBMJ13CA	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
B9	-	BZT52C36WT	Zener diode	34.20..37.80V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Ttr
B9	-	BZT52H-C4V3	Zener diode	4.3V±5%, Izt=5mA, Zzt=95Ω, 375mW	SOD-123FL	7d	1a	Phi
B9	-	BZX399-C3V9	Zener diode	3.9V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
B9	-	MM5Z36H	Zener diode	34..38V, Izt=2mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Zow
B9	-	MM5Z36V	Zener diode	36V±5%, Izt=2mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Eic
B9	-	TFZ4.7B	Zener diode	4.55..4.80V, Izt=20mA, Zzt=25Ω, 500mW	TUMD2	7d	2x	Rhm
B9	-	UDZ4V3B	Zener diode	4.3V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
B920	-	1SMB5920B	Zener diode	6.2V±5%, Izt=60.5mA, Zzt=2Ω, 3W	DO-214AA	1d	1x	Di
B921	-	1SMB5921B	Zener diode	6.8V±5%, Izt=55.1mA, Zzt=2.5Ω, 3W	DO-214AA	1d	1x	Di
B922	-	1SMB5922B	Zener diode	7.5V±5%, Izt=50mA, Zzt=3Ω, 3W	DO-214AA	1d	1x	Di
B923	-	1SMB5923B	Zener diode	8.2V±5%, Izt=45.7mA, Zzt=3.5Ω, 3W	DO-214AA	1d	1x	Di
B924	-	1SMB5924B	Zener diode	9.1V±5%, Izt=41.2mA, Zzt=4Ω, 3W	DO-214AA	1d	1x	Di
B925	-	1SMB5925B	Zener diode	10V±5%, Izt=37.5mA, Zzt=4.5Ω, 3W	DO-214AA	1d	1x	Di
B926	-	1SMB5926B	Zener diode	11V±5%, Izt=34.1mA, Zzt=5.5Ω, 3W	DO-214AA	1d	1x	Di
B927	-	1SMB5927B	Zener diode	12V±5%, Izt=31.2mA, Zzt=6.5Ω, 3W	DO-214AA	1d	1x	Di
B928	-	1SMB5928B	Zener diode	13V±5%, Izt=28.8mA, Zzt=7Ω, 3W	DO-214AA	1d	1x	Di
B929	-	1SMB5929B	Zener diode	15V±5%, Izt=25mA, Zzt=9Ω, 3W	DO-214AA	1d	1x	Di
B930	-	1SMB5930B	Zener diode	16V±5%, Izt=23.4mA, Zzt=10Ω, 3W	DO-214AA	1d	1x	Di

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
B931	-	1SMB5931B	Zener diode	18V±5%, Izt=20.8mA, Zzt=12Ω, 3W	DO-214AA	1d	1x	Di
B932	-	1SMB5932B	Zener diode	20V±5%, Izt=18.7mA, Zzt=14Ω, 3W	DO-214AA	1d	1x	Di
B933	-	1SMB5933B	Zener diode	22V±5%, Izt=17mA, Zzt=17.5Ω, 3W	DO-214AA	1d	1x	Di
B934	-	1SMB5934B	Zener diode	24V±5%, Izt=15.6mA, Zzt=19Ω, 3W	DO-214AA	1d	1x	Di
B935	-	1SMB5935B	Zener diode	27V±5%, Izt=13.9mA, Zzt=23Ω, 3W	DO-214AA	1d	1x	Di
B936	-	1SMB5936B	Zener diode	30V±5%, Izt=12.5mA, Zzt=26Ω, 3W	DO-214AA	1d	1x	Di
B937	-	1SMB5937B	Zener diode	33V±5%, Izt=11.4mA, Zzt=33Ω, 3W	DO-214AA	1d	1x	Di
B938	-	1SMB5938B	Zener diode	36V±5%, Izt=10.4mA, Zzt=38Ω, 3W	DO-214AA	1d	1x	Di
B939	-	1SMB5939B	Zener diode	39V±5%, Izt=9.6mA, Zzt=45Ω, 3W	DO-214AA	1d	1x	Di
B9A	-	P6SBMJ15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20A, 600W(1ms)	DO-214AA	1d	1a	Chm
B9C	-	P6SBMJ15CA	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Chm
BA	-	BZT52H-C4V7	Zener diode	4.7V±5%, Izt=5mA, Zzt=78Ω, 375mW	SOD-123FL	7d	1a	Phi
BA	-	BZX399-C4V7	Zener diode	4.7V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BA	-	FSS29	Si-diode	SBR, 90V, 2A, Vf<0.7V(2A)	DO-214AA	1d	2j	Fag
BA	-	MM3Z5264B	Zener diode	60V±5%, Izt=2.1mA, Zzt=170Ω, 200mW	SOD-323FL	7d	1a	Bts
BA	-	S1BA	Si-diode	Rectifier, 100V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1k	Vs
BA	-	SD833-03	Si-diode	SBD, Sw, 30V, 3A, Vf<0.46V(3A)	SD	7d	2r	Fji
BA	-	TFZ5.1B	Zener diode	4.94..5.20V, Izt=20mA, Zzt=20Ω, 500mW	TUMD2	7d	2x	Rhm
BA	-	TV04A190K-G	TVS	Vrwm=19.0V, Vbr=21.13..25.76V, Ipp=11.76A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BA	-	UDZ4V7B	Zener diode	4.7V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BA	-	ZMS2800	Si-diode	SBR, 70V, 1A, 250mW, Vf<410mV(1mA)	SOD-323	5d	1a	Zx
BA1	-	CH157BPT	Si-diode	SBD, 70V, 15mA, Vf<1V(15mA), 1ns	SOD-123	5d	1a	Chm
BA2	-	CH156BPT	Si-diode	SBD, 60V, 15mA, Vf<1V(15mA), 1ns	SOD-123	5d	1a	Chm
BA3	-	CH140BPT	Si-diode	SBD, 40V, 15mA, Vf<0.9V(15mA), 1ns	SOD-123	5d	1a	Chm
BA4	-	CH150BPT	Si-diode	SBD, 50V, 15mA, Vf<0.95V(15mA), 1ns	SOD-123	5d	1a	Chm
BA5	-	CH160BPT	Si-diode	SBD, 60V, 15mA, Vf<1V(15mA), 1ns	SOD-123	5d	1a	Chm
BA6	-	CH320BPT	Si-diode	SBD, 20V, 350mA, Vf<0.6V(200mA), 1ns	SOD-123	5d	1a	Chm
BA7	-	CH330BPT	Si-diode	SBD, 30V, 350mA, Vf<0.6V(200mA), 1ns	SOD-123	5d	1a	Chm
BA8	-	CH340BPT	Si-diode	SBD, 40V, 350mA, Vf<0.6V(200mA), 1ns	SOD-123	5d	1a	Chm
BB	-	BB555	C-diode	UHF TV-tuning, 30V, 20mA, 2.1..18.7pF(28..1V)	SCD-80	6d	1u	Inf
BB	-	BZT52H-C5V1	Zener diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 375mW	SOD-123FL	7d	1a	Phi
BB	-	BZX399-C5V1	Zener diode	5.1V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BB	-	FSS210	Si-diode	SBR, 100V, 2A, Vf<0.7V(2A)	DO-214AA	1d	2j	Fag
BB	-	SC016-2	Si-diode	GP, Rectifier, 200V, 1A, Vf<1.1V(2A)	SOD-106	1d	1b	Fji
BB	-	SD833-04	Si-diode	SBD, Sw, 40V, 3A, Vf<0.51V(3A)	SD	7d	2r	Fji
BB	-	TFZ5.6B	Zener diode	5.45..5.73V, Izt=20mA, Zzt=13Ω, 500mW	TUMD2	7d	2x	Rhm
BB	-	TV04A190J-G	TVS	Vrwm=19.0V, Vbr=20.10..23.30V, Ipp=13.0A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BB	-	UDZ5V1B	Zener diode	5.1V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BB	-	ZMS5800	Si-diode	SBR, 50V, 1A, 250mW, Vf<410mV(1mA)	SOD-323	5d	1a	Zx
BBA	-	SMBJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, 58.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBB	-	SMBJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBC	-	SMBJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 41.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBD	-	SMBJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBE	-	SMBJ12CA	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBF	-	SMBJ13AC	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBG	-	SMBJ15CA	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBH	-	SMBJ18CA	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBI	-	SMBJ20CA	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBJ	-	SMBJ24CA	TVS	Vrwm=24V, Vbr=26.7..30.7V, 15.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBK	-	SMBJ26CA	TVS	Vrwm=26V, Vbr=28.9..33.2V, 14.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBL	-	FSS210L	Si-diode	SBR, 100V, 2A, Vf<0.85V(2A)	DO-219AA	7d	2n	Fag
BBL	-	SMBJ28CA	TVS	Vrwm=28V, Vbr=31.1..35.8V, 13.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBM	-	SMBJ30CA	TVS	Vrwm=30V, Vbr=33.1..38.3V, 12.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBN	-	SMBJ33CA	TVS	Vrwm=33V, Vbr=36.7..42.2V, 11.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBO	-	SMBJ58CA	TVS	Vrwm=58V, Vbr=64.4..74.1V, 6.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBQ	-	SMBJ85CA	TVS	Vrwm=85V, Vbr=94.4..108.2V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBS	-	SMBJ130CA	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBT	-	SMBJ154CA	TVS	Vrwm=154V, Vbr=167..211.5V, 2.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBU	-	SMBJ170CA	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBV	-	SMBJ118CA	TVS	Vrwm=110V, Vbr=122..140.5V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBV	-	SMBJ188CA	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBW	-	SMBJ48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BBZ	-	SMBJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
BC	-	BZT52H-C5V6	Zener diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 375mW	SOD-123FL	7d	1a	Phi
BC	-	BZX399-C5V6	Zener diode	5.6V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BC	-	FSS215	Si-diode	SBR, 150V, 2A, Vf<0.8V(2A)	DO-214AA	1d	2j	Fag
BC	-	GBLC08CI	TVS	Vrwm=8V, 2A, 350W(1ms), 0.6pF, Bidir.	SOD-323	5ba	1e	Prt
BC	-	MM1Z4678	Zener diode	1.71..1.89V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
BC	-	MMSZ4678	Zener diode	1.8V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
BC	-	SC016-4	Si-diode	GP, Rectifier, 400V, 1A, Vf<1.1V(2A)	SOD-106	1d	1b	Fji

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BC	-	SD833-06	Si-diode	SBD, Sw, 60V, 3A, Vf<0.58V(3A)	SD	7d	2r	Fji
BC	-	TFZ6.2B	Zener diode	5.96..6.27V, Izt=20mA, Zzt=10Ω, 500mW	TUMD2	7d	2x	Rhm
BC	-	UDZ5V6B	Zener diode	5.6V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BC	-	ZMS2811	Si-diode	SBR, 15V, 1A, 250mW, Vf<410mV(1mA)	SOD-323	5d	1a	Zx
BCF	-	MBRM120	Si-diode	SBR, 20V, 1A, Vf=0.41V(1A)	DO-216AA	4d	1h	Ons
BCG	-	MBRM130	Si-diode	SBR, 30V, 1A, Vf=0.33V(1A)	DO-216AA	4d	1h	Ons
BCJ	-	MBRM140	Si-diode	SBR, 40V, 1A, Vf=0.51V(1A)	DO-216AA	4d	1h	Ons
BCL	-	FSS215L	Si-diode	SBR, 150V, 2A, Vf<0.95V(2A)	DO-219AA	7d	2n	Fag
BCV	-	MBRM120E	Si-diode	SBR, 20V, 1A, Vf=0.45V(1A)	DO-216AA	4d	1h	Ons
BD	-	BAS40TG	Si-diode	SBD, 40V, 200mA, Vf<1V(40mA), 5pF	SOD-723	7d	1a	Pjt
BD	-	BZT52H-C6V2	Zener diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 375mW	SOD-123FL	7d	1a	Phi
BD	-	BZX399-C6V2	Zener diode	6.2V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BD	-	KDZ22B	Zener diode	22V±2.5%, 10mA, 1W	PMDU	7d	1s	Rhm
BD	-	MM1Z4679	Zener diode	1.90..2.10V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
BD	-	MMSZ4679	Zener diode	2.0V±5%, Izt=50μA, 500mW	SOD-123	5d	1a	Eic
BD	-	P4SMA18	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
BD	-	P4SMAJ12	TVS	Vrwm=12V, 18.1A, 400W (1ms)	DO-214AC	1d	1a	Lsr
BD	-	P6SMBJ12C	TVS	Vrwm=12V, Vbr=10.8..13.2V, 35A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BD	-	SC016-6	Si-diode	GP, Rectifier, 600V, 1A, Vf<1.1V(2A)	SOD-106	1d	1b	Fji
BD	-	SD833-09	Si-diode	SBD, Sw, 100V, 3A, Vf<0.85V(3A)	SD	7d	2r	Fji
BD	-	SMAJ12	TVS	Vrwm=12V, Vbr=13.3..16.3V, 18.2A, 400W(1ms)	DO-214AC	1d	1k	Vs
BD	-	SMBG12C	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BD	-	SMBJ12C	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BD	-	SMP12	TVS	Vbr=13.3..16.3V, Vrwm=12V, Ipp=18.2A, 400W(1ms)	DO-220AA	8d	1a	Vs
BD	-	TFZ6.8B	Zener diode	6.49..6.83V, Izt=20mA, Zzt=8Ω, 500mW	TUMD2	7d	2x	Rhm
BD	-	TV04A120K-G	TVS	Vrwm=12V, Vbr=13.30..16.30V, Ipp=18.18A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BD	-	TV06B120KB-G	TVS	Vrwm=12V, Vbr=13.30..16.30V, Ipp=27.27A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BD	-	UDZ6V2B	Zener diode	6.2V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BD	-	ZHCS400	Si-diode	Schottky, Sw, 40V, 400mA, 10ns	SOD-323	5d	1a	Zx
BDD	-	1.5SMCJ5.0C	TVS	Vrwm=5V, 156.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDD	-	SMCG5.0C	TVS	Vrwm=5V, 156.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDD	-	SMCJ5.0C	TVS	Vrwm=5V, Vbr=6.4..7.25V, 156.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BDD	-	TV15C5V0KB-G	TVS	Vrwm=5.0V, Vbr=6.40..7.82V, Ipp=156.25A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDE	-	1.5SMC6.8CA	TVS	Vrwm=5.8V, Vbr=6.45..7.14 V, Ipp=143A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BDE	-	1.5SMCJ5.0CA	TVS	Vrwm=5V, 163A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDE	-	CD214C-T5.0CA	TVS	Vrwm=5V, Irsm=163A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BDE	-	SM15T6V8CA	TVS	Vrwm=5.8V, Vbr=6.45..7.14V, 143A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BDE	-	SMCG5.0CA	TVS	Vrwm=5V, 163A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDE	-	SMCJ5.0CA	TVS	Vrwm=5V, Vbr=6.4..7.25V, 163A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BDE	-	SMCJ5.0CA	TVS	Vrwm=5V, Vbr=6.4..7.25V, 163A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BDE	-	TV15C5V0JB-G	TVS	Vrwm=5.0V, Vbr=6.40..7.07V, Ipp=163.04A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDF	-	1.5SMCJ6.0C	TVS	Vrwm=6V, 131.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDF	-	SMCG6.0C	TVS	Vrwm=6V, 131.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDF	-	SMCJ6.0C	TVS	Vrwm=6V, Vbr=6.67..7.67V, 131.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BDF	-	TV15C6V0KB-G	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, Ipp=131.58A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDG	-	1.5SMCJ6.0CA	TVS	Vrwm=6V, 145.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDG	-	CD214C-T6.0CA	TVS	Vrwm=6V, Irsm=145.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BDG	-	SM15T7V5CA	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, 132A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BDG	-	SMCG6.0CA	TVS	Vrwm=6V, 145.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDG	-	SMCG8.0C	TVS	Vrwm=8V, 100A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDG	-	SMCJ6.0CA	TVS	Vrwm=6V, Vbr=6.67..7.67V, 145.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BDG	-	SMCJ8.0C	TVS	Vrwm=8V, Vbr=8.89..9.83V, 100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BDG	-	TV15C6V0JB-G	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=145.63A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDH	-	1.5SMCJ6.5C	TVS	Vrwm=6.5V, 122A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDH	-	SMCG6.5C	TVS	Vrwm=6.5V, 122A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDH	-	SMCJ6.5C	TVS	Vrwm=6.5V, Vbr=7.22..8.3V, 122A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BDH	-	TV15C6V5KB-G	TVS	Vrwm=6.50V, Vbr=7.22..8.82V, Ipp=121.95A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDJ	-	P4SMA18	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 16.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BDK	-	1.5SMC7.5CA	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=132A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BDK	-	1.5SMCJ6.5CA	TVS	Vrwm=6.5V, 133.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDK	-	CD214C-T6.5CA	TVS	Vrwm=6.5V, Irsm=133.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BDK	-	SMA18	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 15.1A, 400W(1ms)	DO-214AC	1d	1a	Lge
BDK	-	SMCG6.5CA	TVS	Vrwm=6.5V, 133.9A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDK	-	SMCJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.3V, 133.9A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BDK	-	SMCJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.3V, 133.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BDK	-	TV15C6V5JB-G	TVS	Vrwm=6.50V, Vbr=7.22..7.98V, Ipp=133.93A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDL	-	1.5SMCJ7.0C	TVS	Vrwm=7V, 112.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDL	-	SMCG7.0C	TVS	Vrwm=7V, 112.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDL	-	SMCJ7.0C	TVS	Vrwm=7V, Vbr=7.78..8.95V, 112.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BDL	-	TV15C7V0KB-G	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=112.78A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BDM	-	1.5SMC8.2CA	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=124A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BDM	-	1.5SMCJ7.0CA	TVS	Vrwm=7V, 125A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDM	-	CD214C-T7.0CA	TVS	Vrwm=7V, Irsm=125A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BDM	-	SMA18C	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 15.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BDM	-	SMCG7.0CA	TVS	Vrwm=7V, 125A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDM	-	SMCJ7.0CA	TVS	Vrwm=7V, Vbr=7.78..8.95V, 125A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BDM	-	SMCJ7.0CA	TVS	Vrwm=7V, Vbr=7.78..8.95V, 125A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BDM	-	TV15C7VOJB-G	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=125.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDN	-	1.5SMCJ7.5C	TVS	Vrwm=7.5V, 104.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDN	-	SMCG7.5C	TVS	Vrwm=7.5V, 104.9A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDN	-	SMCJ7.5C	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 104.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BDN	-	TV15C7V5KB-G	TVS	Vrwm=7.50V, Vbr=8.33..10.20V, Ipp=104.90A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDP	-	1.5SMC9.1CA	TVS	Vrwm=7.78V, Vbr=8.65..9.5V, Ipp=112A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BDP	-	1.5SMCJ7.5CA	TVS	Vrwm=7.5V, 116.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDP	-	CD214C-T7.5CA	TVS	Vrwm=7.5V, Irsm=116.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BDP	-	SM15T10CA	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, 103A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BDP	-	SMAJ12C	TVS	Vrwm=12V, Vbr=13.3..14.7V, 18.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BDP	-	SMCG7.5CA	TVS	Vrwm=7.5V, 116.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDP	-	SMCJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 116.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BDP	-	SMCJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 116.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BDP	-	TPSMA18	TVS	Vrwm=18V, Ipp=15.1A, 400W (1ms)	DO-214AC	1d	1k	Vs
BDP	-	TPSMP18	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, Ipp=15.1A, 400W(1ms)	DO-220AA	8d	1a	Vs
BDP	-	TV15C7V5JB-G	TVS	Vrwm=7.50V, Vbr=8.33..9.21V, Ipp=116.28A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDQ	-	1.5SMCJ8.0C	TVS	Vrwm=8V, 100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDQ	-	SMCJ6.0CA	TVS	Vrwm=6V, Vbr=6.67..7.67V, 145.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BDQ	-	TV15C8V0KB-G	TVS	Vrwm=8.0V, Vbr=8.89..10.90V, Ipp=100.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDR	-	1.5SMCJ8.0CA	TVS	Vrwm=8V, 110.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDR	-	CD214C-T8.0CA	TVS	Vrwm=8V, Irsm=110.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BDR	-	SMCG8.0CA	TVS	Vrwm=8V, 110.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDR	-	SMCJ8.0CA	TVS	Vrwm=8V, Vbr=8.89..10.23V, 110.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1k	Vs
BDR	-	SMCJ8.0CA	TVS	Vrwm=8V, Vbr=8.89..10.23V, 110.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BDR	-	TV15C8V0JB-G	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=110.29A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDS	-	1.5SMCJ8.5C	TVS	Vrwm=8.5V, 94.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDS	-	SMCG8.5C	TVS	Vrwm=8.5V, 94.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDS	-	SMCJ8.5C	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 94.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BDS	-	TV15C8V5KB-G	TVS	Vrwm=8.55V, Vbr=9.44..11.50V, Ipp=94.34A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDT	-	1.5SMC10CA	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, Ipp=103A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BDT	-	1.5SMCJ8.5CA	TVS	Vrwm=8.5V, 104.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDT	-	CD214C-T8.5CA	TVS	Vrwm=8.5V, Irsm=104.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BDT	-	SM15T12CA	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, 90A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BDT	-	SMCG8.5CA	TVS	Vrwm=8.5V, 104.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDT	-	SMCJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 104.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BDT	-	SMCJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 104.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BDT	-	TV15C8V5JB-G	TVS	Vrwm=8.55V, Vbr=9.44..10.40V, Ipp=104.17A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDU	-	1.5SMCJ9.0C	TVS	Vrwm=9V, 88.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDU	-	SMCG9.0C	TVS	Vrwm=9V, 88.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDU	-	SMCJ9.0C	TVS	Vrwm=9V, Vbr=10.0..12.2V, 88.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BDU	-	TV15C9V0KB-G	TVS	Vrwm=9.0V, Vbr=10.0..12.20V, Ipp=88.76A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDV	-	1.5SMC11CA	TVS	Vrwm=9.4V, Vbr=10.5..11.6V, Ipp=96A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BDV	-	1.5SMCJ9.0CA	TVS	Vrwm=9V, 97.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDV	-	CD214C-T9.0CA	TVS	Vrwm=9V, Irsm=97.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BDV	-	SMCG9.0CA	TVS	Vrwm=9V, 97.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDV	-	SMCJ9.0CA	TVS	Vrwm=9V, Vbr=10..11.5V, 97.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1k	Vs
BDV	-	SMCJ9.0CA	TVS	Vrwm=9V, Vbr=10..11.5V, 97.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BDV	-	TV15C9V0JB-G	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=97.40A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDW	-	1.5SMCJ10C	TVS	Vrwm=10V, 79.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDW	-	SMCG10C	TVS	Vrwm=10V, 79.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDW	-	SMCJ10C	TVS	Vrwm=10V, Vbr=11.1..13.6V, 79.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BDW	-	TV15C100KB-G	TVS	Vrwm=10.0V, Vbr=11.10..13.60 V, Ipp=79.79A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDX	-	1.5SMC12CA	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, Ipp=90A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BDX	-	1.5SMCJ10CA	TVS	Vrwm=10V, 88.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDX	-	CD214C-T10CA	TVS	Vrwm=10V, Irsm=88.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BDX	-	SM15T15CA	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, 71A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BDX	-	SMCG10CA	TVS	Vrwm=10V, 88.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDX	-	SMCJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.8V, 88.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BDX	-	SMCJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.8V, 88.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1k	Vs
BDX	-	TV15C100JB-G	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=88.24A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDY	-	1.5SMCJ11C	TVS	Vrwm=11V, 74.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDY	-	SMCG11C	TVS	Vrwm=11V, 74.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDY	-	SMCJ11C	TVS	Vrwm=11V, Vbr=12.2..14.9V, 74.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BDY	-	TV15C110KB-G	TVS	Vrwm=11.0V, Vbr=12.20..14.90V, Ipp=74.63A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BDZ	-	1.5SMC13CA	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, Ipp=82A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BDZ	-	1.5SMCJ11CA	TVS	Vrwm=11V, 82.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BDZ	-	CD214C-T11CA	TVS	Vrwm=11V, Irsm=82.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BDZ	-	SMCG11CA	TVS	Vrwm=11V, 82.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BDZ	-	SMCJ11CA	TVS	Vrwm=11V, Vbr=12.2..14V, 82.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BDZ	-	SMCJ11CA	TVS	Vrwm=11V, Vbr=12.2..14V, 82.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1k	Vs
BDZ	-	TV15C110JB-G	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=82.42A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BE	-	BZT52H-C6V8	Zener diode	6.8V±5%, Izt=5mA, Zzt=8Ω, 375mW	SOD-123FL	7d	1a	Phi
BE	-	BZX399-C6V8	Zener diode	6.8V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BE	-	CD214B-T12CA	TVS	Vrwm=12V, Irsm=30.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
BE	-	MM1Z4680	Zener diode	2.09..2.31V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
BE	-	MMSZ4680	Zener diode	2.2V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
BE	-	MSMP12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, Ipp=39.5A, 150W (1ms)	MicroSMP	8d	1k	Vs
BE	-	P4SMA18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
BE	-	P4SMAJ12A	TVS	Vrwm=12V, 20.1A, 400W (1ms)	DO-214AC	1d	1a	Lsr
BE	-	P6SMBJ12CA	TVS	Vrwm=12V, Vbr=11.4..12.6V, 36A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BE	-	PMF12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, Ipp=10.1A, 200W(1ms)	SOD-123FL	7d	1a	Shp
BE	-	SC016-8	Si-diode	GP, Rectifier, 800V, 1A, Vf<1.1V(2A)	SOD-106	1d	1b	Fji
BE	-	SD832-03	Si-diode	SBD, Sw, 30V, 2A, Vf<0.46V(2A)	SD	7d	2p	Fji
BE	-	SMA6L12A	TVS	Vrwm=12V, Vbr=13.30..14.70V, 30.2A, 600W(1ms)	DO-221AC	7d	2s	Lif
BE	-	SMAJ12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, 20.1A, 400W(1ms)	DO-214AC	1d	1k	Vs
BE	-	SMBG12CA	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BE	-	SMBJ12CA	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
BE	-	SMBJ12CA	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BE	-	SMF12A	ESDP-diode	Vbr=13.3V, Vrwm=12V, Ipp=10.1A, 200W(1ms)	SMF	7d	2y	Vs
BE	-	SMF12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, Ipp=10.1A, 200W(1ms)	SMF	1d	2sa	Lif
BE	-	SMP12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, Ipp=20.1A, 400W(1ms)	DO-220AA	8d	1a	Vs
BE	-	TFZ7.5B	Zener diode	7.07..7.45V, Izt=20mA, Zzt=8Ω, 500mW	TUMD2	7d	2x	Rhm
BE	-	TV04A120J-G	TVS	Vrwm=12V, Vbr=13.30..14.70V, Ipp=20.10A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BE	-	TV06B120JB-G	TVS	Vrwm=12V, Vbr=13.30..14.70V, Ipp=30.15A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BE	-	UDZ6V8B	Zener diode	6.8V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BEA	-	TPSMA6L12A	TVS	Vrwm=12.0V, Vbr=13.30..14.70V, Ipp=30.2A, 600W(1ms)	DO-221AC	1d	2s	Lif
BEA	-	TV15C190KB-G	TVS	Vrwm=19.0V, Vbr=21.13..25.76V, Ipp=44.10A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BEB	-	TV15C190JB-G	TVS	Vrwm=19.0V, Vbr=21.10..23.30V, Ipp=48.73A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BED	-	1.5SMCJ12C	TVS	Vrwm=12V, 68.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BED	-	SMCG12C	TVS	Vrwm=12V, 68.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BED	-	SMCJ12C	TVS	Vrwm=12V, Vbr=13.3..15.3V, 68.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BED	-	TV15C120KB-G	TVS	Vrwm=12V, Vbr=13.30..16.30V, Ipp=68.18A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BEE	-	1.5SMCJ12CA	TVS	Vrwm=12V, 75.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BEE	-	CD214C-T12CA	TVS	Vrwm=12V, Irsm=75.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BEE	-	SM15T18CA	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, 59.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BEE	-	SMCG12CA	TVS	Vrwm=12V, 75.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BEE	-	SMCJ12CA	TVS	Vrwm=12V, Vbr=13.3..15.3V, 75.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1k	Vs
BEE	-	SMCJ12CA	TVS	Vrwm=12V, Vbr=13.3..15.3V, 75.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BEE	-	TV15C120JB-G	TVS	Vrwm=12V, Vbr=13.30..14.70V, Ipp=75.38A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BEF	-	1.5SMCJ13C	TVS	Vrwm=13V, 63A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BEF	-	SMCG13C	TVS	Vrwm=13V, 63.A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BEF	-	SMCJ13C	TVS	Vrwm=13V, Vbr=14.4..16.5V, 63.A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BEF	-	TV15C130KB-G	TVS	Vrwm=13.0V, Vbr=14.40..17.60V, Ipp=63.03A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BEG	-	1.5SMCJ13CA	TVS	Vrwm=13V, 69.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BEG	-	CD214C-T13CA	TVS	Vrwm=13V, Irsm=69.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BEG	-	SMCG13CA	TVS	Vrwm=13V, 69.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BEG	-	SMCJ13CA	TVS	Vrwm=13V, Vbr=14.4..16.5V, 69.7A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BEG	-	SMCJ13CA	TVS	Vrwm=13V, Vbr=14.4..16.5V, 69.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BEG	-	TV15C130JB-G	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=69.77A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BEH	-	1.5SMCJ14C	TVS	Vrwm=14V, 58.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BEH	-	SMCG14C	TVS	Vrwm=14V, 58.1A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BEH	-	SMCJ14C	TVS	Vrwm=14V, Vbr=15.6..19.1V, 58.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BEH	-	TV15C140KB-G	TVS	Vrwm=14.0V, Vbr=15.60..19.10V, Ipp=58.14A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BEJ	-	P4SMA18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BEK	-	1.5SMC16CA	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, Ipp=67A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BEK	-	1.5SMCJ14CA	TVS	Vrwm=14V, 64.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BEK	-	CD214C-T14CA	TVS	Vrwm=14V, Irsm=64.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BEK	-	SM15T22CA	TVS	Vrwm=18.8, Vbr=20.9..23.1V, 49A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BEK	-	SMA18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 15.7A, 400W(1ms)	DO-214AC	1d	1a	Lge
BEK	-	SMCG14CA	TVS	Vrwm=14V, 64.7A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BEK	-	SMCJ14CA	TVS	Vrwm=14V, Vbr=15.6..17.9V, 64.7A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BEK	-	SMCJ14CA	TVS	Vrwm=14V, Vbr=15.6..17.9V, 64.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BEK	-	TV15C140JB-G	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=64.66A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BEL	-	1.5SMCJ15C	TVS	Vrwm=15V, 55.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BEL	-	SMCG15C	TVS	Vrwm=15V, 55.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BEL	-	SMCJ15C	TVS	Vrwm=15V, Vbr=16.7..19.2V, 55.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BEL	-	TV15C150KB-G	TVS	Vrwm=15.0V, Vbr=16.70..20.40V, Ipp=55.76A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BEM	-	1.5SMC18CA	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, Ipp=59.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BEM	-	1.5SMCJ15CA	TVS	Vrwm=15V, 61.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BEM	-	CD214C-T15CA	TVS	Vrwm=15V, Irsm=61.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BEM	-	SM15T24CA	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, 45A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BEM	-	SMA18CA	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 15.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BEM	-	SMCG15CA	TVS	Vrwm=15V, 61.5A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BEM	-	SMCJ15CA	TVS	Vrwm=15V, Vbr=16.7..19.2V, 61.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BEM	-	SMCJ15CA	TVS	Vrwm=15V, Vbr=16.7..19.2V, 61.5A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BEM	-	TV15C150JB-G	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=61.48A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BEN	-	1.5SMCJ16C	TVS	Vrwm=16V, 52.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BEN	-	SMCG16C	TVS	Vrwm=16V, 52.1A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BEN	-	SMCJ16C	TVS	Vrwm=16V, Vbr=17.8..19.7V, 52.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
BEN	-	TV15C160KB-G	TVS	Vrwm=16.0V, Vbr=17.80..21.80V, Ipp=52.08A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BEP	-	1.5SMCJ16CA	TVS	Vrwm=16V, 57.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BEP	-	CD214C-T16CA	TVS	Vrwm=16V, Irsm=57.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BEP	-	SM15T27CA	TVS	Vrwm=23.1V, Vbr=25.7..28.4V, 40A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BEP	-	SMAJ12CA	TVS	Vrwm=12V, Vbr=13.3..14.7V, 20.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BEP	-	SMCG16CA	TVS	Vrwm=16V, 57.7A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BEP	-	SMCJ16CA	TVS	Vrwm=16V, Vbr=17.8..19.7V, 57.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BEP	-	SMCJ16CA	TVS	Vrwm=16V, Vbr=17.8..20.5V, 57.7A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BEP	-	TPSMA18A	TVS	Vrwm=18V, Ipp=15.9A, 400W (1ms)	DO-214AC	1d	1k	Vs
BEP	-	TPSMP18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, Ipp=15.9A, 400W(1ms)	DO-220AA	8d	1a	Vs
BEP	-	TV15C160JB-G	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=57.69A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BEQ	-	1.5SMCJ17C	TVS	Vrwm=17V, 49.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BEQ	-	SMCG17C	TVS	Vrwm=17V, 49.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BEQ	-	SMCJ17C	TVS	Vrwm=17V, Vbr=18.9..21.7V, 49.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BEQ	-	TV15C170KB-G	TVS	Vrwm=17.0V, Vbr=18.90..23.10V, Ipp=49.18A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BER	-	1.5SMC20CA	TVS	Vrwm=17.1V, Vbr=19..21V, Ipp=54A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BER	-	1.5SMCJ17CA	TVS	Vrwm=17V, 53.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BER	-	CD214C-T17CA	TVS	Vrwm=17V, Irsm=53.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BER	-	SM15T30CA	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, 36A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BER	-	SMCG17CA	TVS	Vrwm=17V, 54.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BER	-	SMCJ17CA	TVS	Vrwm=17V, Vbr=18.9..21.7V, 53.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BER	-	SMCJ17CA	TVS	Vrwm=17V, Vbr=18.9..21.7V, 54.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BER	-	TV15C170JB-G	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=54.35A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BES	-	1.5SMCJ18C	TVS	Vrwm=18V, 46.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BES	-	SMCG18C	TVS	Vrwm=18V, 46.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BES	-	SMCJ18C	TVS	Vrwm=18V, Vbr=20..23.3V, 46.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BES	-	TV15C180KB-G	TVS	Vrwm=18.0V, Vbr=20.0..24.40V, Ipp=46.58A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BET	-	1.5SMC22CA	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, Ipp=49A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BET	-	1.5SMCJ18CA	TVS	Vrwm=18V, 51.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BET	-	CD214C-T18CA	TVS	Vrwm=18V, Irsm=51.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BET	-	SM15T33CA	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, 33A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BET	-	SMCG18CA	TVS	Vrwm=18V, 51.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BET	-	SMCJ18CA	TVS	Vrwm=18V, Vbr=20..23.3V, 51.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BET	-	SMCJ18CA	TVS	Vrwm=18V, Vbr=20..23.3V, 51.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BET	-	TV15C180JB-G	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=51.37A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BEU	-	1.5SMCJ20C	TVS	Vrwm=20V, 41.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BEU	-	SMCG20C	TVS	Vrwm=20V, 41.9A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BEU	-	SMCJ20C	TVS	Vrwm=20V, Vbr=22.2..25.5V, 41.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BEU	-	TV15C200KB-G	TVS	Vrwm=20.0V, Vbr=22.20..27.10V, Ipp=41.90A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BEV	-	1.5SMC24CA	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, Ipp=45A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BEV	-	1.5SMCJ20CA	TVS	Vrwm=20V, 46.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BEV	-	CD214C-T20CA	TVS	Vrwm=20V, Irsm=46.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BEV	-	SM15T36CA	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, 30A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BEV	-	SMCG20CA	TVS	Vrwm=20V, 46.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BEV	-	SMCJ20CA	TVS	Vrwm=20V, Vbr=22.2..25.5V, 46.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BEV	-	SMCJ20CA	TVS	Vrwm=20V, Vbr=22.2..25.5V, 46.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BEV	-	TV15C200JB-G	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=46.30A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BEW	-	1.5SMCJ22C	TVS	Vrwm=22V, 38.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BEW	-	SMCG22C	TVS	Vrwm=22V, 38.1A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BEW	-	SMCJ22C	TVS	Vrwm=22V, Vbr=24.4..28V, 38.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BEW	-	TV15C220KB-G	TVS	Vrwm=22.0V, Vbr=24.40..29.80V, Ipp=38.07A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BEX	-	1.5SMC27CA	TVS	Vrwm=23.1V, Vbr=25.7..28.4 V, Ipp=40A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BEX	-	1.5SMCJ22CA	TVS	Vrwm=22V, 42.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BEX	-	CD214C-T22CA	TVS	Vrwm=22V, Irsm=42.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BEX	-	SM15T39CA	TVS	Vrwm=33.3V, Vbr=37.1..41V, 28A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BEX	-	SMCG22CA	TVS	Vrwm=22V, 42.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BEX	-	SMCJ22CA	TVS	Vrwm=22V, Vbr=24.4..28V, 42.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BEX	-	SMCJ22CA	TVS	Vrwm=22V, Vbr=24.4..28V, 42.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BEX	-	TV15C220JB-G	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=42.25A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BEY	-	1.5SMCJ24C	TVS	Vrwm=24V, 34.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BEY	-	SMCG24C	TVS	Vrwm=24V, 34.9A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BEY	-	SMCJ24C	TVS	Vrwm=24V, Vbr=26.7..30.7V, 34.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BEY	-	TV15C240KB-G	TVS	Vrwm=24.0V, Vbr=26.70..32.60V, Ipp=34.88A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BEZ	-	1.5SMCJ24CA	TVS	Vrwm=24V, 38.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BEZ	-	CD214C-T24CA	TVS	Vrwm=24V, Irsm=38.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BEZ	-	SMCG24CA	TVS	Vrwm=24V, 38.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BEZ	-	SMCJ24CA	TVS	Vrwm=24V, Vbr=26.7..30.7V, 38.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BEZ	-	SMCJ24CA	TVS	Vrwm=24V, Vbr=26.7..30.7V, 38.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BEZ	-	TV15C240JB-G	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=38.56A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BF	-	BZT52H-C7V5	Zener diode	7.5V±5%, Izt=5mA, Zzt=10Ω, 375mW	SOD-123FL	7d	1a	Phi
BF	-	BZX399-C7V5	Zener diode	7.5V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BF	-	KDZ6.8FV	Zener diode	6.40..7.20V, Izt=5mA, Zzt=25Ω, 100mW	TFSC	7d	1a	Kec
BF	-	MAZD051	Zener diode	4.8..5.4V, Zzt=60Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
BF	-	MM1Z4681	Zener diode	2.28..2.52V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
BF	-	MMSZ4681	Zener diode	2.4V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
BF	-	P4SMA20	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
BF	-	P4SMAJ13	TVS	Vrwm=13V, 16.8A, 400W (1ms)	DO-214AC	1d	1a	Lsr
BF	-	P6SMBJ13C	TVS	Vrwm=13V, Vbr=11.7..14.3V, 32A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BF	-	SD832-04	Si-diode	SBD, Sw, 40V, 2A, Vf<0.51V(2A)	SD	7d	2p	Fji
BF	-	SMAJ13	TVS	Vrwm=13V, Vbr=14.4..17.6V, 16.8A, 400W(1ms)	DO-214AC	1d	1k	Vs
BF	-	SMBG13C	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BF	-	SMBJ13C	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BF	-	SMP13	TVS	Vbr=14.4..17.6V, Vrwm=13V, Ipp=16.8A, 400W(1ms)	DO-220AA	8d	1a	Vs
BF	-	TFZ8.2B	Zener diode	7.78..8.19V, Izt=20mA, Zzt=8Ω, 500mW	TUMD2	7d	2x	Rhm
BF	-	TV04A130K-G	TVS	Vrwm=13.0V, Vbr=14.40..17.60V, Ipp=16.81A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BF	-	TV06B130KB-G	TVS	Vrwm=13.0V, Vbr=14.40..17.60V, Ipp=25.21A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BF	-	UDZ7V5B	Zener diode	7.5V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BF	at	BZT52C7V5S	Zener diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Di
BFD	-	1.5SMCJ26C	TVS	Vrwm=26V, 32.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFD	-	SMCG26C	TVS	Vrwm=26V, 32.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFD	-	SMCJ26C	TVS	Vrwm=26V, Vbr=28.9..33.2V, 32.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFD	-	TV15C260KB-G	TVS	Vrwm=26.0V, Vbr=28.90..35.30V, Ipp=32.19A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFE	-	1.5SMC30CA	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, Ipp=36A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BFE	-	1.5SMCJ26CA	TVS	Vrwm=26V, 35.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFE	-	CD214C-T26CA	TVS	Vrwm=26V, Irsm=35.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BFE	-	SMCG26CA	TVS	Vrwm=26V, 35.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFE	-	SMCJ26CA	TVS	Vrwm=26V, Vbr=28.9..33.2V, 35.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BFE	-	SMCJ26CA	TVS	Vrwm=26V, Vbr=28.9..33.2V, 35.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFE	-	TV15C260JB-G	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=35.63A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFF	-	1.5SMCJ28C	TVS	Vrwm=28V, 30A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFF	-	SMCG28C	TVS	Vrwm=28V, 30A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFF	-	SMCJ28C	TVS	Vrwm=28V, Vbr=31.1..35.8V, 30A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFF	-	TV15C280KB-G	TVS	Vrwm=28.0V, Vbr=31.10..38.0V, Ipp=30.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFG	-	1.5SMC33CA	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, Ipp=33A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BFG	-	1.5SMCJ28CA	TVS	Vrwm=28V, 33A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFG	-	CD214C-T28CA	TVS	Vrwm=28V, Irsm=33A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BFG	-	SMCG28CA	TVS	Vrwm=28V, 33A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFG	-	SMCJ28CA	TVS	Vrwm=28V, Vbr=31.1..35.8V, 33A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BFG	-	SMCJ28CA	TVS	Vrwm=28V, Vbr=31.1..35.8V, 33A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFG	-	TV15C280JB-G	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=33.04A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFH	-	1.5SMCJ30C	TVS	Vrwm=30V, 28A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFH	-	SMCG30C	TVS	Vrwm=30V, 28A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFH	-	SMCJ30C	TVS	Vrwm=30V, Vbr=33.3..38.3V, 28A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFH	-	TV15C300KB-G	TVS	Vrwm=30.0V, Vbr=33.30..40.70V, Ipp=28.04A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFK	-	1.5SMC36CA	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, Ipp=30A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BFK	-	1.5SMCJ30CA	TVS	Vrwm=30V, 31A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFK	-	CD214C-T30CA	TVS	Vrwm=30V, Irsm=31A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BFK	-	SMA20	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 13.7A, 400W(1ms)	DO-214AC	1d	1a	Lge
BFK	-	SMCG30CA	TVS	Vrwm=30V, 31A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFK	-	SMCJ30CA	TVS	Vrwm=30V, Vbr=33.3..38.3V, 31A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFK	-	SMCJ30CA	TVS	Vrwm=30V, Vbr=33.3..38.3V, 31A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BFK	-	TV15C300JB-G	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=30.99A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFL	-	1.5SMCJ33C	TVS	Vrwm=33V, 25.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFL	-	SMCG33C	TVS	Vrwm=33V, 25.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BFL	-	SMCJ33C	TVS	Vrwm=33V, Vbr=36.7..44.9V, 25.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFL	-	TV15C330KB-G	TVS	Vrwm=33.0V, Vbr=36.7..44.9V, Ipp=25.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFM	-	1.5SMC39CA	TVS	Vrwm=33.3V, Vbr=37.1..41V, Ipp=28A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BFM	-	1.5SMCJ33CA	TVS	Vrwm=33V, 28.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFM	-	CD214C-T33CA	TVS	Vrwm=33V, Irsm=28.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BFM	-	SMA20C	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 13.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BFM	-	SMCG33CA	TVS	Vrwm=33V, 28.1A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFM	-	SMCJ33CA	TVS	Vrwm=33V, Vbr=36.7..40.6V, 28.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1x	Di
BFM	-	SMCJ33CA	TVS	Vrwm=33V, Vbr=36.7..44.9V, 28.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFM	-	TV15C330JB-G	TVS	Vrwm=33.0V, Vbr=36.7..40.6V, Ipp=28.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFN	-	1.5SMCJ36C	TVS	Vrwm=36V, 23.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFN	-	SMCG36C	TVS	Vrwm=36V, 23.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFN	-	SMCJ36C	TVS	Vrwm=36V, Vbr= 40..46V, 23.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFN	-	TV15C360KB-G	TVS	Vrwm=36.0V, Vbr=40.0..48.90V, Ipp=23.33A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFO	-	SM15T75CA	TVS	Vrwm=64.0V, Vbr=71.3..78.8V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BFP	-	1.5SMC43CA	TVS	Vrwm=36.8V, Vbr=40.9..45.2V, Ipp=25.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BFP	-	1.5SMCJ36CA	TVS	Vrwm=36V, 25.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFP	-	CD214C-T36CA	TVS	Vrwm=36V, Irsm=25.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BFP	-	SM15T68CA	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, 16.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BFP	-	SMAJ13C	TVS	Vrwm=13V, Vbr=14.4..17.6V, 16.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BFP	-	SMCG36CA	TVS	Vrwm=36V, 25.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFP	-	SMCJ36CA	TVS	Vrwm=36V, Vbr= 40..46V, 25.8A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BFP	-	SMCJ36CA	TVS	Vrwm=36V, Vbr= 40..46V, 25.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFP	-	TPSMA20	TVS	Vrwm=20V, Ipp=13.7A, 400W (1ms)	DO-214AC	1d	1k	Vs
BFP	-	TPSMP20	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, Ipp=13.7A, 400W(1ms)	DO-220AA	8d	1a	Vs
BFP	-	TV15C360JB-G	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=25.82A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFQ	-	1.5SMCJ40C	TVS	Vrwm=40V, 21A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFQ	-	SMCG40C	TVS	Vrwm=40V, 21A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFQ	-	SMCJ40C	TVS	Vrwm=40V, Vbr=44.4..51.1V, 21A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFQ	-	TV15C400KB-G	TVS	Vrwm=40.0V, Vbr=44.40..54.30V, Ipp=21.01A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFR	-	1.5SMC47CA	TVS	Vrwm=40.2V, Vbr=44.7..49.4V, Ipp=23.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BFR	-	1.5SMCJ40CA	TVS	Vrwm=40V, 23.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFR	-	CD214C-T40CA	TVS	Vrwm=40V, Irsm=23.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BFR	-	SMCG40CA	TVS	Vrwm=40V, 23.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFR	-	SMCJ40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, 23.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BFR	-	SMCJ40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, 23.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFR	-	TV15C400JB-G	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=23.26A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFS	-	1.5SMCJ43C	TVS	Vrwm=43V, 19.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFS	-	SMCG43C	TVS	Vrwm=43V, 19.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFS	-	SMCJ43C	TVS	Vrwm=43V, Vbr=47.8..54.9V, 19.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFS	-	TV15C430KB-G	TVS	Vrwm=43.0V, Vbr=47.80..58.40V, Ipp=19.56A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFT	-	1.5SMC51CA	TVS	Vrwm=43.6V, Vbr=48.5..53.6V, Ipp=21.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BFT	-	1.5SMCJ43CA	TVS	Vrwm=43V, 21.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFT	-	CD214C-T43CA	TVS	Vrwm=43V, Irsm=21.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BFT	-	SMCG43CA	TVS	Vrwm=43V, 21.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFT	-	SMCJ43CA	TVS	Vrwm=43V, Vbr=47.8..54.9V, 21.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFT	-	SMCJ43CA	TVS	Vrwm=43V, Vbr=47.8..54.9V, 21.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BFT	-	TV15C430JB-G	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=21.61A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFU	-	1.5SMCJ45C	TVS	Vrwm=45V, 18.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFU	-	SMCG45C	TVS	Vrwm=45V, 18.7A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFU	-	SMCJ45C	TVS	Vrwm=45V, Vbr=50..57.5V, 18.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFU	-	TV15C450KB-G	TVS	Vrwm=45.0V, Vbr=50.0..61.10V, Ipp=18.68A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFV	-	1.5SMC56CA	TVS	Vrwm=47.8V, Vbr=53.2..58.8V, Ipp=19.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BFV	-	1.5SMCJ45CA	TVS	Vrwm=45V, 20.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFV	-	CD214C-T45CA	TVS	Vrwm=45V, Irsm=20.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BFV	-	SMCG45CA	TVS	Vrwm=45V, 20.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFV	-	SMCJ45CA	TVS	Vrwm=45V, Vbr=50..57.5V, 20.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFV	-	SMCJ45CA	TVS	Vrwm=45V, Vbr=50..57.5V, 20.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BFV	-	TV15C450JB-G	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=20.63A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFW	-	1.5SMCJ48C	TVS	Vrwm=48V, 17.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFW	-	SMCG48C	TVS	Vrwm=48V, 17.5A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFW	-	SMCJ48C	TVS	Vrwm=48V, Vbr=53.3..61.3V, 17.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFW	-	TV15C480KB-G	TVS	Vrwm=48.0V, Vbr=53.30..65.10V, Ipp=17.54A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFX	-	1.5SMCJ48CA	TVS	Vrwm=48V, 19.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFX	-	CD214C-T48CA	TVS	Vrwm=48V, Irsm=19.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BFX	-	SM15T100CA	TVS	Vrwm=85.5V, Vbr=95..105V, 11A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BFX	-	SMCG48CA	TVS	Vrwm=48V, 19.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BFX	-	SMCJ48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, 19.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BFX	-	SMCJ48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, 19.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BFX	-	TV15C480JB-G	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=19.38A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BFY	-	1.5SMCJ51C	TVS	Vrwm=51V, 18.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFY	-	TV15C510KB-G	TVS	Vrwm=51.0V, Vbr=56.70..69.30V, Ipp=16.47A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BFZ	-	1.5SMC62CA	TVS	Vrwm=53V, Vbr=58.9..65.1V, Ipp=17.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BFZ	-	1.5SMCJ51CA	TVS	Vrwm=51V, 18.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BFZ	-	CD214C-T51CA	TVS	Vrwm=51V, Irsm=18.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BFZ	-	SMCJ51CA	TVS	Vrwm=51V, Vbr=56.7..65.2V, 18.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BFZ	-	TV15C510JB-G	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=18.20A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BG	-	BZT52H-C8V2	Zener diode	8.2V±5%, Izt=5mA, Zzt=10Ω, 375mW	SOD-123FL	7d	1a	Phi
BG	-	BZX399-C8V2	Zener diode	8.2V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BG	-	CD214B-T13CA	TVS	Vrwm=13V, Irsm=27.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
BG	-	MSMP13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, Ipp=36.8A, 150W (1ms)	MicroSMP	8d	1k	Vs
BG	-	P4SMA20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
BG	-	P4SMAJ13A	TVS	Vrwm=13V, 18.6A, 400W (1ms)	DO-214AC	1d	1a	Lsr
BG	-	P6SMBJ13CA	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BG	-	PMF13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, Ipp=9.30A, 200W(1ms)	SOD-123FL	7d	1a	Shp
BG	-	SD834-03-TE12R	Si-diode	SBD, Sw, 30V, 4A, Vf<0.46V(4A)	SD	7d	2p	Fji
BG	-	SMA6L13A	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, 28.0A, 600W(1ms)	DO-221AC	7d	2s	Lif
BG	-	SMAJ13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, 18.6A, 400W(1ms)	DO-214AC	1d	1k	Vs
BG	-	SMAJ13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, 18.6A, 400W(1ms)	DO-214AC	1d	1q	Ste
BG	-	SMBG13CA	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BG	-	SMBJ13CA	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BG	-	SMBJ13CA	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
BG	-	SMF13A	ESDP-diode	Vbr=14.4V, Vrwm=13V, Ipp=9.3A, 200W(1ms)	SMF	7d	2y	Vs
BG	-	SMF13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, Ipp=9.3A, 200W(1ms)	SMF	1d	2sa	Lif
BG	-	SMP13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, Ipp=18.6A, 400W(1ms)	DO-220AA	8d	1a	Vs
BG	-	TFZ9.1B	Zener diode	8.57..9.01V, Izt=20mA, Zzt=8Ω, 500mW	TUMD2	7d	2x	Rhm
BG	-	TV04A130J-G	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=18.60A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BG	-	TV06B130JB-G	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=27.91A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BG	-	UDZ8V2B	Zener diode	8.2V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BGA	-	1.5SMC6V8C	TVS	Vrwm=5.5V, Vbr=6.12..7.48V, Ipp=139A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGA	-	TPSMA6L13A	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=28.0A, 600W(1ms)	DO-221AC	1d	2s	Lif
BGA	-	TV15C800KB-G	TVS	Vrwm=80.0V, Vbr=88.96..108.80V, Ipp=10.47A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGB	-	1.5SMC6V8CA	TVS	Vrwm=5.8V, Vbr=6.45..7.14 V, Ipp=143A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGB	-	TV15C800JB-G	TVS	Vrwm=80.0V, Vbr=88.80..97.60V, Ipp=11.57A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGC	-	1.5SMC7V5C	TVS	Vrwm=6.05V, Vbr=6.75..8.25V, Ipp=128A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGD	-	1.5SMC7V5CA	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=132A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGD	-	1.5SMCJ54C	TVS	Vrwm=54V, 15.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGD	-	SMCG54C	TVS	Vrwm=54V, 15.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGD	-	SMCJ54C	TVS	Vrwm=54V, Vbr=60..69V, 15.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGD	-	TV15C540KB-G	TVS	Vrwm=54.0V, Vbr=60.0..73.30V, Ipp=15.58A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGE	-	1.5SMC8V2C	TVS	Vrwm=6.63V, Vbr=7.38..9.02V, Ipp=120A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGE	-	1.5SMCJ54CA	TVS	Vrwm=54V, 17.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGE	-	CD214C-T54CA	TVS	Vrwm=54V, Irsm=17.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BGE	-	SMCG54CA	TVS	Vrwm=54V, 17.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGE	-	SMCJ54CA	TVS	Vrwm=54V, Vbr=60..69V, 17.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BGE	-	SMCJ54CA	TVS	Vrwm=54V, Vbr=60..69V, 17.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGE	-	TV15C540JB-G	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=17.22A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGF	-	1.5SMC8V2CA	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=124A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGF	-	1.5SMCJ58C	TVS	Vrwm=58V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGF	-	SMCG58C	TVS	Vrwm=58V, 14.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGF	-	SMCJ58C	TVS	Vrwm=58V, Vbr=64.4..74.1V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGF	-	TV15C580KB-G	TVS	Vrwm=58.0V, Vbr=64.40..78.70V, Ipp=14.56A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGFJ	-	P4SMA20	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 14.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BGG	-	1.5SMC68CA	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, Ipp=16.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BGG	-	1.5SMC9V1C	TVS	Vrwm=7.37V, Vbr=8.19..10V, Ipp=109A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGG	-	1.5SMCJ58CA	TVS	Vrwm=58V, 16A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGG	-	CD214C-T58CA	TVS	Vrwm=58V, Irsm=16A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BGG	-	SMCG58CA	TVS	Vrwm=58V, 16A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGG	-	SMCJ58CA	TVS	Vrwm=58V, Vbr=64.4..74.1V, 16A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BGG	-	SMCJ58CA	TVS	Vrwm=58V, Vbr=64.4..74.1V, 16A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGG	-	TV15C580JB-G	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=16.03A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGH	-	1.5SMC9V1CA	TVS	Vrwm=7.78V, Vbr=8.65..9.5V, Ipp=112A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGH	-	1.5SMCJ60C	TVS	Vrwm=60V, 14A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGH	-	SMCG60C	TVS	Vrwm=60V, 14A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGH	-	SMCJ60C	TVS	Vrwm=60V, Vbr=66.7..76.7V, 14A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGH	-	TV15C600KB-G	TVS	Vrwm=60.0V, Vbr=66.70..81.50V, Ipp=14.02A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGJ	-	MBRS1540	Si-diode	SBR, 40V, 1.5A, Vf<0.46V(1.5A)	DO-214AA	1d	1a	Mot
BGJ	-	P4SMA20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BGK	-	1.5SMC10C	TVS	Vrwm=8.1V, Vbr=9..11V, Ipp=100A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGK	-	1.5SMCJ60CA	TVS	Vrwm=60V, 15.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BGK	-	CD214C-T60CA	TVS	Vrwm=60V, Irsm=15.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BGK	-	SM15T150CA	TVS	Vrwm=128V, Vbr=143..158V, 7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BGK	-	SMA20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 14.4A, 400W(1ms)	DO-214AC	1d	1a	Lge
BGK	-	SMCG60CA	TVS	Vrwm=60V, 15.5A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGK	-	SMCJ60CA	TVS	Vrwm=60V, Vbr=66.7..76.7V, 15.5A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BGK	-	SMCJ60CA	TVS	Vrwm=60V, Vbr=66.7..76.7V, 15.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGK	-	TV15C600JB-G	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=15.50A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGL	-	1.5SMC10CA	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, Ipp=103A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGL	-	1.5SMCJ64C	TVS	Vrwm=64V, 13.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGL	-	SMCG64C	TVS	Vrwm=64V, 13.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGL	-	SMCJ64C	TVS	Vrwm=64V, Vbr=71.1..81.8V, 13.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGL	-	TV15C640KB-G	TVS	Vrwm=64.0V, Vbr=71.10..86.90V, Ipp=13.16A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGM	-	1.5SMC11C	TVS	Vrwm=8.92V, Vbr=9.9..12.1V, Ipp=93A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGM	-	1.5SMC75CA	TVS	Vrwm=64.1V, Vbr=71.3..78.8V, Ipp=14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BGM	-	1.5SMCJ64CA	TVS	Vrwm=64V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGM	-	CD214C-T64CA	TVS	Vrwm=64V, Irsm=14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BGM	-	SMA20CA	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 14.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BGM	-	SMCG64CA	TVS	Vrwm=64V, 14.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGM	-	SMCJ64CA	TVS	Vrwm=64V, Vbr=71.1..81.8V, 14.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BGM	-	SMCJ64CA	TVS	Vrwm=64V, Vbr=71.1..81.8V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGM	-	TV15C640JB-G	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=14.56A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGN	-	1.5SMC11CA	TVS	Vrwm=9.4V, Vbr=10.5..11.6V, Ipp=96A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGN	-	1.5SMCJ70C	TVS	Vrwm=70V, 12A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGN	-	SMCG70C	TVS	Vrwm=70V, 12A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGN	-	SMCJ70C	TVS	Vrwm=70V, Vbr=77.8..89.5V, 12A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGN	-	TV15C700KB-G	TVS	Vrwm=70.0V, Vbr=77.80..95.10V, Ipp=12.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGP	-	1.5SMC12C	TVS	Vrwm=9.72V, Vbr=10.8..13.2V, Ipp=87A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGP	-	1.5SMC82CA	TVS	Vrwm=70.1V, Vbr=77.9..86.1V, Ipp=13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BGP	-	1.5SMCJ70CA	TVS	Vrwm=70V, 13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGP	-	CD214C-T70CA	TVS	Vrwm=70V, Irsm=13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BGP	-	SMAJ13CA	TVS	Vrwm=13V, Vbr=14.4..15.9V, 18.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BGP	-	SMCG70CA	TVS	Vrwm=70V, 13.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGP	-	SMCJ70CA	TVS	Vrwm=70V, Vbr=77.8..89.5V, 13.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BGP	-	SMCJ70CA	TVS	Vrwm=70V, Vbr=77.8..89.5V, 13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGP	-	TPSMA20A	TVS	Vrwm=20V, Ipp=14.4A, 400W (1ms)	DO-214AC	1d	1k	Vs
BGP	-	TPSMP20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, Ipp=14.4A, 400W(1ms)	DO-220AA	8d	1a	Vs
BGP	-	TV15C700JB-G	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=13.27A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGQ	-	1.5SMCJ75C	TVS	Vrwm=75V, 11.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGQ	-	SMCG75C	TVS	Vrwm=75V, 11.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGQ	-	SMCJ75C	TVS	Vrwm=75V, Vbr=83.3..95.8V, 11.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGQ	-	TV15C750KB-G	TVS	Vrwm=75.0V, Vbr=83.30..102.0V, Ipp=11.19A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGR	-	1.5SMC12CA	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, Ipp=90A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGR	-	1.5SMCJ75CA	TVS	Vrwm=75V, 12.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGR	-	CD214C-T75CA	TVS	Vrwm=75V, Irsm=12.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BGR	-	SMCG75CA	TVS	Vrwm=75V, 12.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGR	-	SMCJ75CA	TVS	Vrwm=75V, Vbr=83.3..95.8V, 12.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BGR	-	SMCJ75CA	TVS	Vrwm=75V, Vbr=83.3..95.8V, 12.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGR	-	TV15C750JB-G	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=12.40A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGS	-	1.5SMC13C	TVS	Vrwm=10.5V, Vbr=11.7..14.3V, Ipp=79A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGS	-	1.5SMCJ78C	TVS	Vrwm=78V, 10.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGS	-	SMCG78C	TVS	Vrwm=78V, 10.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGS	-	SMCJ78C	TVS	Vrwm=78V, Vbr=86.7..99.7V, 10.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGS	-	TV15C780KB-G	TVS	Vrwm=78.0V, Vbr=86.70..106.0V, Ipp=10.79A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGT	-	1.5SMC13CA	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, Ipp=82A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGT	-	1.5SMC91CA	TVS	Vrwm=77.8V, Vbr=86.5..95.5V, Ipp=12A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BGT	-	1.5SMCJ78CA	TVS	Vrwm=78V, 11.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGT	-	CD214C-T78CA	TVS	Vrwm=78V, Irsm=11.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BGT	-	SMCG78CA	TVS	Vrwm=78V, 11.9A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGT	-	SMCJ78CA	TVS	Vrwm=78V, Vbr=86.7..99.7V, 11.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BGT	-	SMCJ78CA	TVS	Vrwm=78V, Vbr=86.7..99.7V, 11.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGT	-	TV15C780JB-G	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=11.90A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGU	-	1.5SMC15C	TVS	Vrwm=12.1V, Vbr=13.5..16.5V, Ipp=68A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGU	-	1.5SMCJ85C	TVS	Vrwm=85V, 9.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGU	-	SMCG85C	TVS	Vrwm=85V, 9.9A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGU	-	SMCJ85C	TVS	Vrwm=85V, Vbr=94.4..115V, 9.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGU	-	TV15C850KB-G	TVS	Vrwm=85.0V, Vbr=94.40..115.0V, Ipp=9.93A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGV	-	1.5SMC100CA	TVS	Vrwm=85.5V, Vbr=95..105V, Ipp=11A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BGV	-	1.5SMC15CA	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, Ipp=71A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGV	-	1.5SMCJ85CA	TVS	Vrwm=85V, 10.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGV	-	CD214C-T85CA	TVS	Vrwm=85V, Irsm=10.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BGV	-	SM15T200CA	TVS	Vrwm=171V, Vbr=190..210V, 5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BGV	-	SMCG85CA	TVS	Vrwm=85V, 10.9A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGV	-	SMCJ85CA	TVS	Vrwm=85V, Vbr=94.4..108.2V, 10.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BGV	-	SMCJ85CA	TVS	Vrwm=85V, Vbr=94.4..108.2V, 10.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGV	-	TV15C850JB-G	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=10.95A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGW	-	1.5SMC16C	TVS	Vrwm=12.9V, Vbr=14.4..17.6V, Ipp=64A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGW	-	1.5SMCJ90C	TVS	Vrwm=90V, 9.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGW	-	SMCG90C	TVS	Vrwm=90V, 9.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGW	-	SMCJ90C	TVS	Vrwm=90V, Vbr=100..122V, 9.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGW	-	TV15C900KB-G	TVS	Vrwm=90V, Vbr=100.0..122.0V, Ipp=9.38A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGX	-	1.5SMC110CA	TVS	Vrwm=94V, Vbr=105..116V, Ipp=9.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BGX	-	1.5SMC16CA	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, Ipp=67A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGX	-	1.5SMCJ90CA	TVS	Vrwm=90V, 10.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGX	-	CD214C-T90CA	TVS	Vrwm=90V, Irsm=10.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BGX	-	SM15T220CA	TVS	Vrwm=188V, Vbr=209..231V, 4.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
BGX	-	SMCG90CA	TVS	Vrwm=90V, 10.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGX	-	SMCJ90CA	TVS	Vrwm=90V, Vbr=100..115.5V, 10.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BGX	-	SMCJ90CA	TVS	Vrwm=90V, Vbr=100..115.5V, 10.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1k	Vs
BGX	-	TV15C900JB-G	TVS	Vrwm=90V, Vbr=100.0..111.0V, Ipp=10.27A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGY	-	1.5SMC18C	TVS	Vrwm=14.5V, Vbr=16.2..19.8V, Ipp=56.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGY	-	1.5SMCJ100C	TVS	Vrwm=100V, 8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGY	-	SMCG100C	TVS	Vrwm=100V, 8.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGY	-	SMCJ100C	TVS	Vrwm=100V, Vbr=111..136V, 8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGY	-	TV15C101KB-G	TVS	Vrwm=100.0V, Vbr=111.0..136.0V, Ipp=8.38A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BGZ	-	1.5SMC120CA	TVS	Vrwm=97.2V, Vbr=108..132V, Ipp=8.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BGZ	-	1.5SMC18CA	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, Ipp=59.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BGZ	-	1.5SMCJ100CA	TVS	Vrwm=100V, 9.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BGZ	-	CD214C-T100CA	TVS	Vrwm=100V, Irsm=9.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BGZ	-	SMCG100CA	TVS	Vrwm=100V, 9.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BGZ	-	SMCJ100CA	TVS	Vrwm=100V, Vbr=111..123V, 9.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BGZ	-	SMCJ100CA	TVS	Vrwm=100V, Vbr=111..136V, 8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1x	Di
BGZ	-	TV15C101JB-G	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=9.26A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BH	-	BZT52H-C9V1	Zener diode	9.1V±5%, Izt=5mA, Zzt=10Ω, 375mW	SOD-123FL	7d	1a	Phi
BH	-	BZX399-C9V1	Zener diode	9.1V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BH	-	MM1Z4682	Zener diode	2.565..2.835V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
BH	-	MMSZ4682	Zener diode	2.7V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
BH	-	P4SMA22	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
BH	-	P4SMAJ14	TVS	Vrwm=14V, 15.5A, 400W (1ms)	DO-214AC	1d	1a	Lsr
BH	-	P6SMBJ14C	TVS	Vrwm=14V, Vbr=15.5..19.8V, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BH	-	SC017-2	Si-diode	GP, Rectifier, 200V, 1A, Vf<1.1V(2A)	SOD-106	1d	1b	Fji
BH	-	SD834-04-TE12R	Si-diode	SBD, Sw, 40V, 4A, Vf<0.51V(4A)	SD	7d	2p	Fji
BH	-	SMAJ13CA	TVS	Vrwm=13V, Vbr=14.4..15.9V, 18.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
BH	-	SMAJ14	TVS	Vrwm=14V, Vbr=15.6..19.1V, 15.5A, 400W(1ms)	DO-214AC	1d	1k	Vs
BH	-	SMBG14C	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BH	-	SMBJ14C	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BH	-	SMP14	TVS	Vbr=15.6..19.1V, Vrwm=14V, Ipp=15.5A, 400W(1ms)	DO-220AA	8d	1a	Vs
BH	-	TFZ10B	Zener diode	9.41..9.90V, Izt=20mA, Zzt=8Ω, 500mW	TUMD2	7d	2x	Rhm
BH	-	TV04A140K-G	TVS	Vrwm=14.0V, Vbr=15.60..19.10V, Ipp=15.50A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BH	-	TV06B140KB-G	TVS	Vrwm=14.0V, Vbr=15.60..19.10V, Ipp=23.26A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BH	-	UDZ9V1B	Zener diode	9.1V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BHA	-	1.5SMC20C	TVS	Vrwm=16.2V, Vbr=18..22V, Ipp=51.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHA	-	TV15C141JB-G	TVS	Vrwm=140V, Vbr=155.68..190.40V, Ipp=5.99A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHB	-	1.5SMC20CA	TVS	Vrwm=17.1V, Vbr=19..21V, Ipp=54A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHB	-	TV15C141KB-G	TVS	Vrwm=140V, Vbr=155.0..171.40V, Ipp=6.61A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHC	-	1.5SMC22C	TVS	Vrwm=17.8V, Vbr=19.8..24.2V, Ipp=47A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHD	-	1.5SMC22CA	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, Ipp=49A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHD	-	1.5SMCJ110C	TVS	Vrwm=110V, 7.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHD	-	SMCG110C	TVS	Vrwm=110V, 7.7A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BHD	-	SMCJ110C	TVS	Vrwm=110V, Vbr=122..149V, 7.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BHD	-	TV15C111KB-G	TVS	Vrwm=110.0V, Vbr=122.0..149.0V, Ipp=7.65A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHE	-	1.5SMC130CA	TVS	Vrwm=111V, Vbr=124..137V, Ipp=8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BHE	-	1.5SMC24C	TVS	Vrwm=19.4V, Vbr=21.6..26.4V, Ipp=43A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHE	-	1.5SMCJ110CA	TVS	Vrwm=110V, 8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHE	-	CD214C-T110CA	TVS	Vrwm=110V, Irsm=8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BHE	-	SMCG110CA	TVS	Vrwm=110V, 8.5A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BHE	-	SMCJ110CA	TVS	Vrwm=110V, Vbr=122..140.5V, 8.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BHE	-	SMCJ110CA	TVS	Vrwm=110V, Vbr=122..140.5V, 8.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1k	Vs
BHE	-	TV15C111JB-G	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=8.47A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHF	-	1.5SMC24CA	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, Ipp=45A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHF	-	1.5SMCJ120C	TVS	Vrwm=120V, 7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BHF	-	SMCG120C	TVS	Vrwm=120V, 7A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BHF	-	SMCJ120C	TVS	Vrwm=120V, Vbr=133..163V, 7.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BHF	-	TV15C121KB-G	TVS	Vrwm=120.0V, Vbr=133.0..163.0V, Ipp=7.01A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHG	-	1.5SMC27C	TVS	Vrwm=21.8V, Vbr=24.3..29.7V, Ipp=38.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHG	-	1.5SMCJ120CA	TVS	Vrwm=120V, 7.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHG	-	CD214C-T120CA	TVS	Vrwm=120V, Irsm=7.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BHG	-	SMCG120CA	TVS	Vrwm=120V, 7.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BHG	-	SMCJ120CA	TVS	Vrwm=120V, Vbr=133..153V, 7.9A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BHG	-	SMCJ120CA	TVS	Vrwm=120V, Vbr=133..153V, 7.9A, 1500W(1mS), Bidir.	DO-214AB	1ba	1k	Vs
BHG	-	TV15C121JB-G	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=7.77A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHH	-	1.5SMC27CA	TVS	Vrwm=23.1V, Vbr=25.7..28.4 V, Ipp=40A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHH	-	1.5SMCJ130C	TVS	Vrwm=130V, 6.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHH	-	SMCG130C	TVS	Vrwm=130V, 6.5A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BHH	-	SMCJ130C	TVS	Vrwm=130V, Vbr=144..176V, 6.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BHH	-	TV15C131KB-G	TVS	Vrwm=130V, Vbr=144.0..176.0V, Ipp=6.49A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHI	-	1.5SMC250C	TVS	Vrwm=202V, Vbr=225..275V, Ipp=4.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHJ	-	1.5SMC250CA	TVS	Vrwm=214V, Vbr=237..263V, Ipp=4.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHJ	-	P4SMA22	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 13.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BHK	-	1.5SMC150CA	TVS	Vrwm=128V, Vbr=143..158V, Ipp=7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BHK	-	1.5SMC30C	TVS	Vrwm=24.3V, Vbr=27..33V, Ipp=34.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHK	-	1.5SMCJ130CA	TVS	Vrwm=130V, 7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHK	-	CD214C-T130CA	TVS	Vrwm=130V, Irsm=7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BHK	-	SMA22	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 12.5A, 400W(1ms)	DO-214AC	1d	1a	Lge
BHK	-	SMCG130CA	TVS	Vrwm=130V, 7.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BHK	-	SMCJ130CA	TVS	Vrwm=130V, Vbr=144..165.5V, 7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BHK	-	SMCJ130CA	TVS	Vrwm=130V, Vbr=144..165.5V, 7.A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BHK	-	TV15C131JB-G	TVS	Vrwm=130V, Vbr=144.0..159.0V, Ipp=7.18A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHL	-	1.5SMC30CA	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, Ipp=36A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHL	-	1.5SMCJ150C	TVS	Vrwm=150V, 5.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHL	-	SMCG150C	TVS	Vrwm=150V, 5.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BHL	-	SMCJ150C	TVS	Vrwm=150V, Vbr=167..192.5V, 5.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BHL	-	TV15C151JB-G	TVS	Vrwm=150.0V, Vbr=167.0..204.0V, Ipp=5.60A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHM	-	1.5SMC180CA	TVS	Vrwm=154V, Vbr=171..189V, Ipp=6.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BHM	-	1.5SMC33C	TVS	Vrwm=26.8V, Vbr=29.7..36.3V, Ipp=31.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHM	-	1.5SMCJ150CA	TVS	Vrwm=150V, 6.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHM	-	CD214C-T150CA	TVS	Vrwm=150V, Irsm=6.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BHM	-	SMA22C	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 12.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BHM	-	SMCJ150CA	TVS	Vrwm=150V, Vbr=167..192.5V, 6.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BHM	-	TV15C151KB-G	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=6.17A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHN	-	1.5SMC33CA	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, Ipp=33A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHN	-	1.5SMCJ160C	TVS	Vrwm=160V, 5.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHN	-	SMCG160C	TVS	Vrwm=160V, 5.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BHN	-	SMCJ160C	TVS	Vrwm=160V, Vbr=178..205V, 5.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BHN	-	TV15C161KB-G	TVS	Vrwm=160.0V, Vbr=178.0..218.0V, Ipp=5.23A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHP	-	1.5SMC36C	TVS	Vrwm=29.1V, Vbr=32.4..39.6V, Ipp=29A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHP	-	1.5SMCJ160CA	TVS	Vrwm=160V, 5.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHP	-	CD214C-T160CA	TVS	Vrwm=160V, Irsm=5.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BHP	-	SMAJ14C	TVS	Vrwm=14V, Vbr=15.6..19.1V, 15.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BHP	-	SMCG160CA	TVS	Vrwm=160V, 5.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BHP	-	SMCJ160CA	TVS	Vrwm=160V, Vbr=178..205V, 5.8A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BHP	-	SMCJ160CA	TVS	Vrwm=160V, Vbr=178..205V, 5.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BHP	-	SMCJ180CA	TVS	Vrwm=180V, Vbr=200..220V, 5.14A, 1500W(1mS), Bidir.	DO-214AB	1ba	2m	Rul
BHP	-	TPSMA22	TVS	Vrwm=22V, Ipp=12.5A, 400W (1ms)	DO-214AC	1d	1k	Vs
BHP	-	TPSMP22	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, Ipp=12.5A, 400W(1ms)	DO-220AA	8d	1a	Vs
BHP	-	TV15C161JB-G	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=5.79A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHQ	-	1.5SMCJ170C	TVS	Vrwm=170V, 4.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHQ	-	SMCG170C	TVS	Vrwm=170V, 4.9A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BHQ	-	SMCJ170C	TVS	Vrwm=170V, Vbr=189..217V, 4.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BHQ	-	TV15C171KB-G	TVS	Vrwm=170.0V, Vbr=189.0..231.0V, Ipp=4.93A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHR	-	1.5SMC200CA	TVS	Vrwm=171V, Vbr=190..210V, Ipp=5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BHR	-	1.5SMC36CA	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, Ipp=30A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHR	-	1.5SMCJ170CA	TVS	Vrwm=170V, 5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHR	-	CD214C-T170CA	TVS	Vrwm=170V, Irsm=5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
BHR	-	SMCG170CA	TVS	Vrwm=170V, 5.5A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BHR	-	SMCJ170CA	TVS	Vrwm=170V, Vbr=189..217V, 5.5A, 1500W(1mS), Bidir.	DO-214AB	1ba	1x	Di
BHR	-	SMCJ170CA	TVS	Vrwm=170V, Vbr=189..217V, 5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BHR	-	TV15C171JB-G	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=5.45A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHS	-	1.5SMC39C	TVS	Vrwm=31.6V, Vbr=35.1..42.9V, Ipp=26.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHS	-	1.5SMCJ180C	TVS	Vrwm=180V, 4.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHS	-	SMCG188CA	TVS	Vrwm=188V, 4.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BHS	-	SMCJ188CA	TVS	Vrwm=188V, Vbr=209..255V, 4.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BHS	-	TV15C181KB-G	TVS	Vrwm=180.0V, Vbr=200.16..244.8V, Ipp=4.66A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHT	-	1.5SMC220CA	TVS	Vrwm=175V, Vbr=198..242V, Ipp=4.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BHT	-	1.5SMC39CA	TVS	Vrwm=33.3V, Vbr=37.1..41V, Ipp=28A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHT	-	1.5SMCJ180CA	TVS	Vrwm=180V, 5.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHT	-	SMCG188C	TVS	Vrwm=188V, 4.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
BHT	-	SMCJ188C	TVS	Vrwm=188V, Vbr=209..255V, 4.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1k	Vs
BHT	-	SMCJ190CA	TVS	Vrwm=190V, Vbr=211..232V, 4.87A, 1500W(1mS), Bidir.	DO-214AB	1ba	2m	Rul
BHT	-	TV15C181JB-G	TVS	Vrwm=180.0V, Vbr=200.0..220.0 V, Ipp=5.14A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHU	-	1.5SMC43C	TVS	Vrwm=34.8V, Vbr=38.7..47.3V, Ipp=24A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHU	-	1.5SMCJ190C	TVS	Vrwm=170V, 4.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHU	-	TV15C191KB-G	TVS	Vrwm=190.0V, Vbr=211.28..258.40V, Ipp=4.41A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHV	-	1.5SMC43CA	TVS	Vrwm=36.8V, Vbr=40.9..45.2V, Ipp=25.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHV	-	1.5SMCJ190CA	TVS	Vrwm=170V, 4.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHV	-	SMCJ200CA	TVS	Vrwm=200V, Vbr=224..247V, 4.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	2m	Rul
BHV	-	TV15C191JB-G	TVS	Vrwm=190.0V, Vbr=211.0..232.0V, Ipp=4.87A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHW	-	1.5SMC47C	TVS	Vrwm=38.1V, Vbr=42.3..51.7V, Ipp=22.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHW	-	1.5SMCJ200C	TVS	Vrwm=200V, 4.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHW	-	TV15C201JB-G	TVS	Vrwm=200.0V, Vbr=224.0..247.0V, Ipp=4.60A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHX	-	1.5SMC250CA	TVS	Vrwm=214V, Vbr=237..263V, Ipp=4.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
BHX	-	1.5SMC47CA	TVS	Vrwm=40.2V, Vbr=44.7..49.4V, Ipp=23.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHX	-	1.5SMCJ200CA	TVS	Vrwm=200V, 4.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHX	-	SMCJ220CA	TVS	Vrwm=220V, Vbr=246..272V, 4.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	2m	Rul
BHX	-	TV15C221JB-G	TVS	Vrwm=220.0V, Vbr=246.0..272.0V, Ipp=4.20A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BHY	-	1.5SMC51C	TVS	Vrwm=41.3V, Vbr=45.9..56.1V, Ipp=20.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHY	-	1.5SMCJ210C	TVS	Vrwm=210V, 4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHZ	-	1.5SMC51CA	TVS	Vrwm=43.6V, Vbr=48.5..53.6V, Ipp=21.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BHZ	-	1.5SMCJ210CA	TVS	Vrwm=210V, 4.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BHZ	-	SMCJ250CA	TVS	Vrwm=250V, Vbr=279..309V, 3.7A, 1500W(1mS), Bidir.	DO-214AB	1ba	2m	Rul
BHZ	-	TV15C251JB-G	TVS	Vrwm=250.0V, Vbr=279.0..309.0V, Ipp=3.70A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BI	-	SC017-4	Si-diode	GP, Rectifier, 400V, 1A, Vf<1.1V(2A)	SOD-106	1d	1b	Fji
BI	-	TFZ11B	Zener diode	10.50..11.05V, Izt=10mA, Zzt=10Ω, 500mW	TUMD2	7d	2x	Rhm
BI	-	UDZ10B	Zener diode	10V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BID	-	1.5SMCJ220C	TVS	Vrwm=220V, 3.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BIE	-	1.5SMCJ220CA	TVS	Vrwm=220V, 4.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
BJ	-	BZT52H-C10	Zener diode	10V±5%, Izt=5mA, Zzt=10Ω, 375mW	SOD-123FL	7d	1a	Phi
BJ	-	BZX399-C10	Zener diode	10V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BJ	-	MM1Z4683	Zener diode	2.85..3.15V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
BJ	-	MMSZ4683	Zener diode	3.0V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
BJ	-	TFZ12B	Zener diode	11.44..12.03V, Izt=10mA, Zzt=12Ω, 500mW	TUMD2	7d	2x	Rhm
BJ	-	UDZ11B	Zener diode	11V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BJ05A	-	SMBJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ05A	-	SMBJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ06A	-	SMBJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, 58.3A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ06A	-	SMBJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, 58.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ07A	-	SMBJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, 50.0A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ07A	-	SMBJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, 50.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ08A	-	SMBJ8.0A	TVS	Vrwm=8.0V, Vbr=8.89..10.23V, 44.1A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ08A	-	SMBJ8.0CA	TVS	Vrwm=8V, Vbr=8.89..10.23V, 44.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ09A	-	SMBJ9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ09A	-	SMBJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ100A	-	SMBJ100A	TVS	Vrwm=100V, Vbr=111..128V, 3.7A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ100A	-	SMBJ100CA	TVS	Vrwm=100V, Vbr=111..128V, 3.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ10A	-	SMBJ10A	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ10A	-	SMBJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ110A	-	SMBJ110A	TVS	Vrwm=110V, Vbr=122..154.5V, 3.0A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ110A	-	SMBJ110CA	TVS	Vrwm=110V, Vbr=122..140.5V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ11A	-	SMBJ11A	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ11A	-	SMBJ11CA	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ120A	-	SMBJ120A	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ120A	-	SMBJ120CA	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ12A	-	SMBJ12A	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ12A	-	SMBJ12CA	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ130A	-	SMBJ130A	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ130A	-	SMBJ130CA	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ13A	-	SMBJ13A	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ13A	-	SMBJ13CA	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ14A	-	SMBJ14A	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ14A	-	SMBJ14CA	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ150A	-	SMBJ150A	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-214AA	1d	1a	Sec

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BJ150A	-	SMBJ150CA	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ15A	-	SMBJ15A	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ15A	-	SMBJ15CA	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ160A	-	SMBJ160A	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ160A	-	SMBJ160CA	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ16A	-	SMBJ16A	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ16A	-	SMBJ16CA	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ170A	-	SMBJ170A	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ170A	-	SMBJ170CA	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ17A	-	SMBJ17A	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ17A	-	SMBJ17CA	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ180A	-	SMBJ180A	TVS	Vrwm=180V, Vbr=200..220V, 2.06A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ180A	-	SMBJ180CA	TVS	Vrwm=180V, Vbr=200..220V, 2.06A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ18A	-	SMBJ18A	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ18A	-	SMBJ18CA	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ190A	-	SMBJ190A	TVS	Vrwm=190V, Vbr=211..232V, 1.95A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ190A	-	SMBJ190CA	TVS	Vrwm=190V, Vbr=211..232V, 1.95A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ200A	-	SMBJ200A	TVS	Vrwm=200V, Vbr=224..247V, 1.9A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ200A	-	SMBJ200CA	TVS	Vrwm=200V, Vbr=224..247V, 1.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ20A	-	SMBJ20A	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ20A	-	SMBJ20CA	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ220A	-	SMBJ220A	TVS	Vrwm=220V, Vbr=246..272V, 1.7A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ220A	-	SMBJ220CA	TVS	Vrwm=220V, Vbr=246..272V, 1.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ22A	-	SMBJ22A	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ22A	-	SMBJ22CA	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ24A	-	SMBJ24A	TVS	Vrwm=24V, Vbr=26.7..30.7V, 15.4A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ24A	-	SMBJ24CA	TVS	Vrwm=24V, Vbr=26.7..30.7V, 15.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ250A	-	SMBJ250A	TVS	Vrwm=250V, Vbr=279..309V, 1.5A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ250A	-	SMBJ250CA	TVS	Vrwm=250V, Vbr=279..309V, 1.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ26A	-	SMBJ26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, 14.2A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ26A	-	SMBJ26CA	TVS	Vrwm=26V, Vbr=28.9..33.2V, 14.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ28A	-	SMBJ28A	TVS	Vrwm=28V, Vbr=31.1..35.8V, 13.2A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ28A	-	SMBJ28CA	TVS	Vrwm=28V, Vbr=31.1..35.8V, 13.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ300A	-	SMBJ300A	TVS	Vrwm=300V, Vbr=335..371V, 1.3A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ300A	-	SMBJ300CA	TVS	Vrwm=300V, Vbr=335..371V, 1.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ30A	-	SMBJ30A	TVS	Vrwm=30V, Vbr=33.3..38.3V, 12.4A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ30A	-	SMBJ30CA	TVS	Vrwm=30V, Vbr=33.1..38.3V, 12.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ33A	-	SMBJ33A	TVS	Vrwm=33V, Vbr=36.7..42.2V, 11.3A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ33A	-	SMBJ33CA	TVS	Vrwm=33V, Vbr=36.7..42.2V, 11.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ350A	-	SMBJ350A	TVS	Vrwm=350V, Vbr=391..432V, 1.1A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ350A	-	SMBJ350CA	TVS	Vrwm=350V, Vbr=391..432V, 1.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ36A	-	SMBJ36A	TVS	Vrwm=36V, Vbr=40.0..46.0V, 10.3A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ36A	-	SMBJ36CA	TVS	Vrwm=36V, Vbr=40..46V, 10.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ400A	-	SMBJ400A	TVS	Vrwm=400V, Vbr=447..494V, 0.9A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ400A	-	SMBJ400CA	TVS	Vrwm=400V, Vbr=447..494V, 0.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ40A	-	SMBJ40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ40A	-	SMBJ40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ43A	-	SMBJ43A	TVS	Vrwm=43V, Vbr=47.8..54.9V, 8.6A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ43A	-	SMBJ43CA	TVS	Vrwm=43V, Vbr=47.8..54.9V, 8.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ440A	-	SMBJ440A	TVS	Vrwm=440V, Vbr=492..543V, 0.9A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ440A	-	SMBJ440CA	TVS	Vrwm=440V, Vbr=492..543V, 0.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ45A	-	SMBJ45A	TVS	Vrwm=45V, Vbr=50.0..57.5V, 8.3A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ45A	-	SMBJ45CA	TVS	Vrwm=45V, Vbr=50.0..57.5V, 8.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ48A	-	SMBJ48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ48A	-	SMBJ48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ51A	-	SMBJ51A	TVS	Vrwm=51V, Vbr=56.7..65.2V, 7.3A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ51A	-	SMBJ51CA	TVS	Vrwm=51V, Vbr=56.7..65.2V, 7.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ54A	-	SMBJ54A	TVS	Vrwm=54V, Vbr=60.0..69.0V, 6.9A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ54A	-	SMBJ54CA	TVS	Vrwm=54V, Vbr=60.0..69.0V, 6.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ56A	-	SMBJ58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, 6.4A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ56A	-	SMBJ58CA	TVS	Vrwm=58V, Vbr=64.4..74.1V, 6.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ6.5A	-	SMBJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ6.5A	-	SMBJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ60A	-	SMBJ60A	TVS	Vrwm=60V, Vbr=66.7..76.7V, 6.2A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ60A	-	SMBJ60CA	TVS	Vrwm=60V, Vbr=66.7..76.7V, 6.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ64A	-	SMBJ64A	TVS	Vrwm=64V, Vbr=71.1..81.8V, 5.8A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ64A	-	SMBJ64CA	TVS	Vrwm=64V, Vbr=71.1..81.8V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ7.5A	-	SMBJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 46.5A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ7.5A	-	SMBJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 46.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ70A	-	SMBJ70A	TVS	Vrwm=70V, Vbr=77.8..89.5V, 5.3A, 600W(1ms)	DO-214AA	1d	1a	Sec

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BJ70A	-	SMBJ70CA	TVS	Vrwm=70V, Vbr=77.8..89.5V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ75A	-	SMBJ75A	TVS	Vrwm=75V, Vbr=83.3..95.8V, 4.9A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ75A	-	SMBJ75CA	TVS	Vrwm=75V, Vbr=83.3..95.8V, 4.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ78A	-	SMBJ78A	TVS	Vrwm=58V, Vbr=86.7..99.7V, 4.7A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ78A	-	SMBJ78CA	TVS	Vrwm=78V, Vbr=86.7..99.7V, 4.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ8.5A	-	SMBJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 41.7A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ8.5A	-	SMBJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 41.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ85A	-	SMBJ85A	TVS	Vrwm=85V, Vbr=94.4..108.2V, 4.4A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ85A	-	SMBJ85CA	TVS	Vrwm=85V, Vbr=94.4..108.2V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJ90A	-	SMBJ90A	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms)	DO-214AA	1d	1a	Sec
BJ90A	-	SMBJ90CA	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Sec
BJE	-	SMCJ300CA	TVS	Vrwm=300V, Vbr=335..371V, 3.1A, 1500W(1mS), Bidir.	DO-214AB	1ba	2m	Rul
BJE	-	TV15C301JB-G	TVS	Vrwm=300.0V, Vbr=335.0..371.0V, Ipp=3.10A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BJG	-	SMCJ350CA	TVS	Vrwm=350V, Vbr=391..432V, 2.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	2m	Rul
BJG	-	TV15C351JB-G	TVS	Vrwm=350.0V, Vbr=391.0..432.0V, Ipp=2.60A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BJK	-	SMCJ400CA	TVS	Vrwm=400V, Vbr=447..494V, 2.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	2m	Rul
BJK	-	TV15C401JB-G	TVS	Vrwm=400.0V, Vbr=447.0..494.0V, Ipp=2.30A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BJM	-	SMCJ440CA	TVS	Vrwm=440V, Vbr=492..543V, 2.1A, 1500W(1mS), Bidir.	DO-214AB	1ba	2m	Rul
BJM	-	TV15C441JB-G	TVS	Vrwm=440.0V, Vbr=492.0..543.0V, Ipp=2.10A, 1500W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
BK	-	BZT52H-C11	Zener diode	11V±5%, Izt=5mA, Zzt=10Ω, 375mW	SOD-123FL	7d	1a	Phi
BK	-	BZX399-C11	Zener diode	11V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BK	-	CD214B-T14CA	TVS	Vrwm=14V, Irsm=25.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
BK	-	MM1Z4684	Zener diode	3.13..3.47V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
BK	-	MMSZ4684	Zener diode	3.3V±5%, Izt=50μA, 500mW	SOD-123	5d	1a	Eic
BK	-	MSMP14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, Ipp=33.9A, 150W (1ms)	MicroSMP	8d	1k	Vs
BK	-	P4SMA22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
BK	-	P4SMAJ14A	TVS	Vrwm=14V, 17.2A, 400W (1ms)	DO-214AC	1d	1a	Lsr
BK	-	P6SMBJ14CA	TVS	Vrwm=14V, Vbr=15.5..19.8V, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BK	-	PMF14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, Ipp=8.62A, 200W(1ms)	SOD-123FL	7d	1a	Shp
BK	-	SMA6L14A	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, 25.9A, 600W(1ms)	DO-221AC	7d	2s	Lif
BK	-	SMAJ14A	TVS	Vrwm=14V, Vbr=15.6..17.2V, 17.2A, 400W(1ms)	DO-214AC	1d	1k	Vs
BK	-	SMBG14CA	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BK	-	SMBJ14CA	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
BK	-	SMBJ14CA	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BK	-	SMF14A	ESDP-diode	Vbr=15.6V, Vrwm=14V, Ipp=8.6A, 200W(1ms)	SMF	7d	2y	Vs
BK	-	SMF14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, Ipp=8.6A, 200W(1ms)	SMF	1d	2sa	Lif
BK	-	SMP14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, Ipp=17.2A, 400W(1ms)	DO-220AA	8d	1a	Vs
BK	-	TFZ13B	Zener diode	12.55..13.21V, Izt=10mA, Zzt=14Ω, 500mW	TUMD2	7d	2x	Rhm
BK	-	TV04A140J-G	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=17.24A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BK	-	TV06B140JB-G	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=25.86A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BK	-	UDZ12B	Zener diode	12V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BKA	-	1.5SMC56C	TVS	Vrwm=45.6V, Vbr=50.4..61.6V, Ipp=18.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKA	-	TPSMA6L14A	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=25.9A, 600W(1ms)	DO-221AC	1d	2s	Lif
BKB	-	1.5SMC56CA	TVS	Vrwm=47.8V, Vbr=53.2..58.8V, Ipp=19.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKC	-	1.5SMC62C	TVS	Vrwm=50.2V, Vbr=55.8..68.2V, Ipp=16.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKD	-	1.5SMC62CA	TVS	Vrwm=53V, Vbr=58.9..65.1V, Ipp=17.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKE	-	1.5SMC68C	TVS	Vrwm=55.1V, Vbr=61.2..74.8V, Ipp=15.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKF	-	1.5SMC68CA	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, Ipp=16.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKG	-	1.5SMC75C	TVS	Vrwm=60.7V, Vbr=67.5..82.5V, Ipp=13.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKH	-	1.5SMC75CA	TVS	Vrwm=64.1V, Vbr=71.3..78.8V, Ipp=14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKJ	-	P4SMA22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BKJL	-	MBRS2040	Si-diode	SBR, 40V, 2A, Vf<0.43V(2A)	DO-214AA	1d	1a	Mot
BKK	-	1.5SMC82C	TVS	Vrwm=66.4V, Vbr=73.8..90.2V, Ipp=12.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKK	-	SMA22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 13.1A, 400W(1ms)	DO-214AC	1d	1a	Lge
BKL	-	1.5SMC82CA	TVS	Vrwm=70.1V, Vbr=77.9..86.1V, Ipp=13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKM	-	1.5SMC91C	TVS	Vrwm=73.7V, Vbr=81.9..100V, Ipp=11.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKM	-	SMA22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 13.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BKN	-	1.5SMC91CA	TVS	Vrwm=77.8V, Vbr=86.5..95.5V, Ipp=12A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKP	-	1.5SMC100C	TVS	Vrwm=81V, Vbr=90..110V, Ipp=10.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKP	-	SMAJ14CA	TVS	Vrwm=14V, Vbr=15.6..17.2V, 17.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BKP	-	TPSMA22A	TVS	Vrwm=22V, Ipp=13.1A, 400W (1ms)	DO-214AC	1d	1k	Vs
BKP	-	TPSMP22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, Ipp=13.1A, 400W(1ms)	DO-220AA	8d	1a	Vs
BKR	-	1.5SMC100CA	TVS	Vrwm=85.5V, Vbr=95..105V, Ipp=11A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKS	-	1.5SMC110C	TVS	Vrwm=89.2V, Vbr=99..121V, Ipp=9.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKT	-	1.5SMC110CA	TVS	Vrwm=94V, Vbr=105..116V, Ipp=9.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKU	-	1.5SMC120C	TVS	Vrwm=97.2V, Vbr=108..132V, Ipp=8.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKV	-	1.5SMC120CA	TVS	Vrwm=97.2V, Vbr=108..132V, Ipp=8.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKW	-	1.5SMC130C	TVS	Vrwm=105V, Vbr=117..143V, Ipp=8A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKX	-	1.5SMC130CA	TVS	Vrwm=111V, Vbr=124..137V, Ipp=8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BKY	-	1.5SMC150C	TVS	Vrwm=121V, Vbr=135..165V, Ipp=7A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BKZ	-	1.5SMC150CA	TVS	Vrwm=128V, Vbr=143..158V, Ipp=7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BL	-	BZT52H-C12	Zener diode	12V±5%, Izt=5mA, Zzt=10Ω, 375mW	SOD-123FL	7d	1a	Phi
BL	-	BZX399-C12	Zener diode	12V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BL	-	P4SMA24	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
BL	-	P4SMAJ15	TVS	Vrwm=15V, 14.8A, 400W (1ms)	DO-214AB	1d	1a	Lsr
BL	-	P6SMBJ15C	TVS	Vrwm=15V, Vbr=13.5..16.5V, 27A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BL	-	SMAJ15	TVS	Vrwm=15V, Vbr=16.7..20.4V, 14.9A, 400W(1ms)	DO-214AC	1d	1k	Vs
BL	-	SMBG15C	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BL	-	SMBJ15C	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BL	-	SMP15	TVS	Vbr=16.7..20.4V, Vrwm=15V, Ipp=14.9A, 400W(1ms)	DO-220AA	8d	1a	Vs
BL	-	TFZ15B	Zener diode	13.89..14.62V, Izt=10mA, Zzt=16Ω, 500mW	TUMD2	7d	2x	Rhm
BL	-	TV04A150K-G	TVS	Vrwm=15.0V, Vbr=16.70..20.40V, Ipp=14.87A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BL	-	TV06B150KB-G	TVS	Vrwm=15.0V, Vbr=16.70..20.40V, Ipp=22.30A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BL	-	UDZ13B	Zener diode	13V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BLA	-	1.5SMC160C	TVS	Vrwm=130V, Vbr=144..176V, Ipp=6.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BLB	-	1.5SMC160CA	TVS	Vrwm=136V, Vbr=152..168V, Ipp=6.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BLC	-	1.5SMC170C	TVS	Vrwm=138V, Vbr=153..187V, Ipp=6.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BLD	-	1.5SMC170CA	TVS	Vrwm=145V, Vbr=162..179V, Ipp=6.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BLE	-	1.5SMC180C	TVS	Vrwm=146V, Vbr=162..198V, Ipp=5.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BLF	-	1.5SMC180CA	TVS	Vrwm=154V, Vbr=171..189V, Ipp=6.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BLG	-	1.5SMC200C	TVS	Vrwm=162V, Vbr=180..220V, Ipp=5.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BLH	-	1.5SMC200CA	TVS	Vrwm=171V, Vbr=190..210V, Ipp=5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BLJ	-	P4SMA24	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 12.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BLK	-	1.5SMC220C	TVS	Vrwm=175V, Vbr=198..242V, Ipp=4.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BLK	-	SMA24	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 11.5A, 400W(1ms)	DO-214AC	1d	1a	Lge
BLL	-	1.5SMC220CA	TVS	Vrwm=175V, Vbr=198..242V, Ipp=4.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	2k	Fag
BLM	-	SMA24C	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 11.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BLP	-	SMAJ15C	TVS	Vrwm=15V, Vbr=16.7..18.5V, 14.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BLP	-	TPSMA24	TVS	Vrwm=24V, Ipp=11.5A, 400W (1ms)	DO-214AC	1d	1k	Vs
BLP	-	TPSMP24	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, Ipp=11.5A, 400W(1ms)	DO-220AA	8d	1a	Vs
BM	-	BZT52H-C13	Zener diode	13V±5%, Izt=5mA, Zzt=10Ω, 375mW	SOD-123FL	7d	1a	Phi
BM	-	BZX399-C13	Zener diode	13V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BM	-	CD214B-T15CA	TVS	Vrwm=15V, Irsm=24.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
BM	-	MM1Z4685	Zener diode	3.42..3.78V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
BM	-	MMSZ4685	Zener diode	3.6V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
BM	-	MSMP15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, Ipp=30.8A, 150W (1ms)	MicroSMP	8d	1k	Vs
BM	-	P4SMA24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
BM	-	P4SMAJ15A	TVS	Vrwm=15V, 16.4A, 400W (1ms)	DO-214AB	1d	1a	Lsr
BM	-	P6SMBJ15CA	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BM	-	PMF15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, Ipp=8.20A, 200W(1ms)	SOD-123FL	7d	1a	Shp
BM	-	SMA6L15A	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, 24.6A, 600W(1ms)	DO-221AC	7d	2s	Lif
BM	-	SMAJ15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, 16.4A, 400W(1ms)	DO-214AC	1d	1k	Vs
BM	-	SMAJ15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, 16.4A, 400W(1ms)	DO-214AC	1d	1q	Ste
BM	-	SMBG15CA	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BM	-	SMBJ15CA	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
BM	-	SMBJ15CA	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BM	-	SMF15A	ESDP-diode	Vbr=16.7V, Vrwm=15V, Ipp=8.2A, 200W(1ms)	SMF	7d	2y	Vs
BM	-	SMF15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, Ipp=8.2A, 200W(1ms)	SMF	1d	2sa	Lif
BM	-	SMP15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, Ipp=16.4A, 400W(1ms)	DO-220AA	8d	1a	Vs
BM	-	TFZ16B	Zener diode	15.25..16.04V, Izt=10mA, Zzt=18Ω, 500mW	TUMD2	7d	2x	Rhm
BM	-	TV04A150J-G	TVS	Vrwm=15.0V, Vbr=16.70.. 18.50V, Ipp=16.39A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BM	-	TV06B150JB-G	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=24.59A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BM	-	UDZ15B	Zener diode	15V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BM7	-	SM6T18CA	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, 24A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BMA	-	TPSMA6L15A	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=24.6A, 600W(1ms)	DO-221AC	1d	2s	Lif
BMJ	-	P4SMA24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BMK	-	SMA24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 12.0A, 400W(1ms)	DO-214AC	1d	1a	Lge
BMM	-	SMA24CA	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 12.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BMP	-	SMAJ15CA	TVS	Vrwm=15V, Vbr=16.7..18.5V, 16.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BMP	-	TPSMA24A	TVS	Vrwm=24V, Ipp=12A, 400W (1ms)	DO-214AC	1d	1k	Vs
BMP	-	TPSMP24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, Ipp=12.0A, 400W(1ms)	DO-220AA	8d	1a	Vs
BN	-	BZT52H-C15	Zener diode	15V±5%, Izt=5mA, Zzt=15Ω, 375mW	SOD-123FL	7d	1a	Phi
BN	-	BZX399-C15	Zener diode	15V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BN	-	MM1Z4686	Zener diode	3.70..4.10V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
BN	-	MMSZ4686	Zener diode	3.9V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
BN	-	P4SMA27	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 400W(1ms)	DO-214AC	1d	2j	Fag
BN	-	P4SMAJ16	TVS	Vrwm=16V, 13.8A, 400W (1ms)	DO-214AB	1d	1a	Lsr
BN	-	P6SMBJ16C	TVS	Vrwm=16V, Vbr=14.4..17.6V, 20.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BN	-	SMAJ16	TVS	Vrwm=16V, Vbr=17.8..21.8V, 13.9A, 400W(1ms)	DO-214AC	1d	1k	Vs
BN	-	SMBG16C	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BN	-	SMBJ16C	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BN	-	SMP16	TVS	Vbr=17.8..21.8V, Vrwm=16V, Ipp=13.9A, 400W(1ms)	DO-220AA	8d	1a	Vs
BN	-	TFZ18B	Zener diode	16.82..17.70V, Izt=10mA, Zzt=23Ω, 500mW	TUMD2	7d	2x	Rhm
BN	-	TV04A160K-G	TVS	Vrwm=16.0V, Vbr=17.80.. 21.80V, Ipp=13.89A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BN	-	TV06B160KB-G	TVS	Vrwm=16.0V, Vbr=17.80..21.80V, Ipp=20.83A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BN	-	UDZ16B	Zener diode	16V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BNJ	-	P4SMA27	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 11.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BNK	-	SMA27	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 10.2A, 400W(1ms)	DO-214AC	1d	1a	Lge
BNM	-	SMA27C	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 10.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BNP	-	SMAJ16C	TVS	Vrwm=16V, Vbr=17.8..21.8V, 13.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BNP	-	TPSMA27	TVS	Vrwm=27V, Ipp=10.2A, 400W (1ms)	DO-214AC	1d	1k	Vs
BNP	-	TPSMP27	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, Ipp=10.2A, 400W(1ms)	DO-220AA	8d	1a	Vs
BO	-	TFZ20B	Zener diode	18.63..19.59V, Izt=10mA, Zzt=28Ω, 500mW	TUMD2	7d	2x	Rhm
BO	-	UDZ18B	Zener diode	18V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BOP	-	TPSMA30	TVS	Vrwm=30V, Ipp=9.2A, 400W (1ms)	DO-214AC	1d	1k	Vs
BP	-	BZT52H-C16	Zener diode	16V±5%, Izt=5mA, Zzt=20Ω, 375mW	SOD-123FL	7d	1a	Phi
BP	-	BZX399-C16	Zener diode	16V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BP	-	CD214B-T16CA	TVS	Vrwm=16V, Irsm=23.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
BP	-	CMDZ2L5	Zener diode	2.375..2.625V, Izt=0.5mA, Zzt=900Ω, 250mW	SOD-323	5d	1a	Cen
BP	-	KDZ6.8FVY	Zener diode	6.65..6.93V, Izt=5mA, Zzt=25Ω, 100mW	TFSC	7d	1a	Kec
BP	-	MM1Z4687	Zener diode	4.09..4.52V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
BP	-	MMSZ4687	Zener diode	4.3V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
BP	-	MSMP16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, Ipp=28.8A, 150W (1ms)	MicroSMP	8d	1k	Vs
BP	-	P4SMA27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 400W(1ms)	DO-214AC	1d	2j	Fag
BP	-	P4SMAJ16A	TVS	Vrwm=16V, 15.3A, 400W(1ms)	DO-214AC	1d	1a	Lsr
BP	-	P6SMBJ16CA	TVS	Vrwm=16V, Vbr=14.4..17.6V, 23.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BP	-	PMF16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, Ipp=7.69A, 200W(1ms)	SOD-123FL	7d	1a	Shp
BP	-	SMA6L16A	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, 23.1A, 600W(1ms)	DO-221AC	7d	2s	Lif
BP	-	SMAJ16A	TVS	Vrwm=16V, Vbr=17.8..21.8V, 15.4A, 400W(1ms)	DO-214AC	1d	1k	Vs
BP	-	SMBG16CA	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BP	-	SMBJ16CA	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
BP	-	SMBJ16CA	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BP	-	SMF16A	ESDP-diode	Vbr=17.8V, Vrwm=16V, Ipp=7.7A, 200W(1ms)	SMF	7d	2y	Vs
BP	-	SMF16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, Ipp=7.7A, 200W(1ms)	SMF	1d	2sa	Lif
BP	-	SMP16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, Ipp=15.4A, 400W(1ms)	DO-220AA	8d	1a	Vs
BP	-	TFZ22B	Zener diode	20.64..21.71V, Izt=5mA, Zzt=30Ω, 500mW	TUMD2	7d	2x	Rhm
BP	-	TV04A160J-G	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=15.38A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BP	-	TV06B160JB-G	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=19.67A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BP	-	UDZ20B	Zener diode	20V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BPA	-	TPSMA6L16A	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=23.1A, 600W(1ms)	DO-221AC	1d	2s	Lif
BPJ	-	P4SMA27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BPK	-	SMA27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 10.7A, 400W(1ms)	DO-214AC	1d	1a	Lge
BPM	-	SMA27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 10.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BPP	-	SMAJ16CA	TVS	Vrwm=16V, Vbr=17.8..21.8V, 15.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BPP	-	TPSMA27A	TVS	Vrwm=27V, Ipp=10.7A, 400W (1ms)	DO-214AC	1d	1k	Vs
BPP	-	TPSMP27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, Ipp=10.7A, 400W(1ms)	DO-220AA	8d	1a	Vs
BQ	-	BZT52H-C18	Zener diode	18V±5%, Izt=5mA, Zzt=20Ω, 375mW	SOD-123FL	7d	1a	Phi
BQ	-	BZX399-C18	Zener diode	18V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BQ	-	P4SMA30	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
BQ	-	P4SMAJ17	TVS	Vrwm=17V, 13.1A, 400W (1ms)	DO-214AB	1d	1a	Lsr
BQ	-	P6SMBJ17C	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BQ	-	SMAJ17	TVS	Vrwm=17V, Vbr=18.9..23.1V, 13.1A, 400W(1ms)	DO-214AC	1d	1k	Vs
BQ	-	SMBG17C	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BQ	-	SMBJ17C	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BQ	-	SMP17	TVS	Vbr=18.9..23.1V, Vrwm=17V, Ipp=13.1A, 400W(1ms)	DO-220AA	8d	1a	Vs
BQ	-	TFZ24B	Zener diode	22.61..23.77V, Izt=5mA, Zzt=35Ω, 500mW	TUMD2	7d	2x	Rhm
BQ	-	TV04A170K-G	TVS	Vrwm=17.0V, Vbr=18.90..23.10V, Ipp=13.11A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BQ	-	TV06B170KB-G	TVS	Vrwm=17.0V, Vbr=18.90..23.10V, Ipp=21.74A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BQ	-	UDZ22B	Zener diode	22V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BQJ	-	P4SMA30	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 10.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BQK	-	SMA30	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 9.2A, 400W(1ms)	DO-214AC	1d	1a	Lge
BQM	-	SMA30C	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 9.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BQP	-	SMAJ17C	TVS	Vrwm=17V, Vbr=18.9..23.1V, 13.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BQP	-	TPSMP30	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, Ipp=9.2A, 400W(1ms)	DO-220AA	8d	1a	Vs
BR	-	BZT52H-C20	Zener diode	20V±5%, Izt=5mA, Zzt=20Ω, 375mW	SOD-123FL	7d	1a	Phi
BR	-	BZX399-C20	Zener diode	20V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BR	-	CD214B-T17CA	TVS	Vrwm=17V, Irsm=21.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
BR	-	CMDZ47L	Zener diode	44.65..49.35V, Izt=0.5mA, Zzt=450Ω, 250mW	SOD-323	5d	1a	Cen
BR	-	MM1Z4688	Zener diode	4.47..4.94V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
BR	-	MMSZ4688	Zener diode	4.7V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BR	-	MSMP17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, Ipp=27.2A, 150W (1ms)	MicroSMP	8d	1k	Vs
BR	-	P4SMA30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
BR	-	P4SMAJ17A	TVS	Vrwm=17V, 14.5A, 400W(1ms)	DO-214AC	1d	1a	Lsr
BR	-	P6SMBJ17CA	TVS	Vrwm=17V, Vbr=18.9..23.9V, 21.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BR	-	PMF17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, Ipp=7.25A, 200W(1ms)	SOD-123FL	7d	1a	Shp
BR	-	SMA6L17A	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, 21.8A, 600W(1ms)	DO-221AC	7d	2s	Lif
BR	-	SMAJ17A	TVS	Vrwm=17V, Vbr=18.9..20.9V, 14.5A, 400W(1ms)	DO-214AC	1d	1k	Vs
BR	-	SMBG17CA	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BR	-	SMBJ17CA	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
BR	-	SMBJ17CA	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BR	-	SMF17A	ESDP-diode	Vbr=18.9V, Vrwm=17V, Ipp=7.2A, 200W(1ms)	SMF	7d	2y	Vs
BR	-	SMF17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, Ipp=7.2A, 200W(1ms)	SMF	1d	2sa	Lif
BR	-	SMP17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, Ipp=14.5A, 400W(1ms)	DO-220AA	8d	1a	Vs
BR	-	TFZ27B	Zener diode	24.97..26.26V, Izt=5mA, Zzt=45Ω, 500mW	TUMD2	7d	2x	Rhm
BR	-	TV04A170J-G	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=14.49A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BR	-	TV06B170JB-G	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=18.63A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BR	-	UDZ24B	Zener diode	24V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BR1A	aa	CD214A-R150	Si-diode	Rectifier, 50V, 1A, Vf<1V(1A), <12pF	DO-214AC	1d	1a	Brn
BR1B	aa	CD214A-R1100	Si-diode	Rectifier, 100V, 1A, Vf<1V(1A), <12pF	DO-214AC	1d	1a	Brn
BR1D	aa	CD214A-R1200	Si-diode	Rectifier, 200V, 1A, Vf<1V(1A), <12pF	DO-214AC	1d	1a	Brn
BR1G	aa	CD214A-R1400	Si-diode	Rectifier, 400V, 1A, Vf<1V(1A), <12pF	DO-214AC	1d	1a	Brn
BR1J	aa	CD214A-R1600	Si-diode	Rectifier, 600V, 1A, Vf<1V(1A), <12pF	DO-214AC	1d	1a	Brn
BR1K	aa	CD214A-R1800	Si-diode	Rectifier, 800V, 1A, Vf<1.25V(1A), <12pF	DO-214AC	1d	1a	Brn
BR1M	aa	CD214A-R11000	Si-diode	Rectifier, 1000V, 1A, Vf<1.25V(1A), <12pF	DO-214AC	1d	1a	Brn
BR1N	aa	CD214A-R11100	Si-diode	Rectifier, 1100V, 1A, Vf<1.25V(1A), <12pF	DO-214AC	1d	1a	Brn
BR1Q	aa	CD214A-R11200	Si-diode	Rectifier, 1200V, 1A, Vf<1.25V(1A), <12pF	DO-214AC	1d	1a	Brn
BR1Y	aa	CD214A-R11600	Si-diode	Rectifier, 1600V, 1A, Vf<1.25V(1A), <12pF	DO-214AC	1d	1a	Brn
BRA	-	TPSMA6L17A	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=21.8A, 600W(1ms)	DO-221AC	1d	2s	Lif
BRJ	-	P4SMA30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BRK	-	SMA30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 9.7A, 400W(1ms)	DO-214AC	1d	1a	Lge
BRM	-	SMA30CA	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 9.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BRP	-	SMAJ17CA	TVS	Vrwm=17V, Vbr=18.9..20.9V, 14.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BRP	-	TPSMA30A	TVS	Vrwm=30V, Ipp=9.7A, 400W (1ms)	DO-214AC	1d	1k	Vs
BRP	-	TPSMP30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, Ipp=9.7A, 400W(1ms)	DO-220AA	8d	1a	Vs
BS	-	BZT52H-C22	Zener diode	22V±5%, Izt=5mA, Zzt=25Ω, 375mW	SOD-123FL	7d	1a	Phi
BS	-	BZX399-C22	Zener diode	22V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BS	-	P4SMA33	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
BS	-	P4SMAJ18	TVS	Vrwm=18V, 12.4A, 400W (1ms)	DO-214AB	1d	1a	Lsr
BS	-	P6SMBJ18C	TVS	Vrwm=18V, Vbr=16.2..19.8V, 18.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BS	-	SMAJ18	TVS	Vrwm=18V, Vbr=20.0..24.4V, 12.4A, 400W(1ms)	DO-214AC	1d	1k	Vs
BS	-	SMBG18C	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BS	-	SMBJ18C	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BS	-	SMP18	TVS	Vbr=20.0..24.4V, Vrwm=18V, Ipp=12.4A, 400W(1ms)	DO-220AA	8d	1a	Vs
BS	-	TFZ30B	Zener diode	27.70..29.13V, Izt=5mA, Zzt=55Ω, 500mW	TUMD2	7d	2x	Rhm
BS	-	TV04A180K-G	TVS	Vrwm=18.0V, Vbr=20.0..24.40V, Ipp=12.42A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BS	-	TV06B180KB-G	TVS	Vrwm=18.0V, Vbr=20.0..24.40V, Ipp=20.55A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BS	-	UDZ27B	Zener diode	27V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BSJ	-	P4SMA33	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 9.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BSK	-	SMA33	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 8.4A, 400W(1ms)	DO-214AC	1d	1a	Lge
BSM	-	SMA33C	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 8.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BSP	-	SMAJ18C	TVS	Vrwm=18V, Vbr=20.0..24.4V, 12.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BSP	-	TPSMA33	TVS	Vrwm=33V, Ipp=8.4A, 400W (1ms)	DO-214AC	1d	1k	Vs
BSP	-	TPSMP33	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, Ipp=8.4A, 400W(1ms)	DO-220AA	8d	1a	Vs
BT	-	BZT52H-C24	Zener diode	24V±5%, Izt=5mA, Zzt=30Ω, 375mW	SOD-123FL	7d	1a	Phi
BT	-	BZX399-C24	Zener diode	24V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BT	-	CD214B-T18CA	TVS	Vrwm=18V, Irsm=20.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
BT	-	MSMP18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, Ipp=25.4A, 150W (1ms)	MicroSMP	8d	1k	Vs
BT	-	P4SMA33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
BT	-	P4SMAJ18A	TVS	Vrwm=18V, 13.7A, 400W (1ms)	DO-214AB	1d	1a	Lsr
BT	-	P6SMBJ18CA	TVS	Vrwm=18V, Vbr=16.2..19.8V, 20.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BT	-	PMF18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, Ipp=6.85A, 200W(1ms)	SOD-123FL	7d	1a	Shp
BT	-	SMA6L18A	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, 20.6A, 600W(1ms)	DO-221AC	7d	2s	Lif
BT	-	SMAJ18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, 13.7A, 400W(1ms)	DO-214AC	1d	1k	Vs
BT	-	SMBG18CA	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BT	-	SMBJ18CA	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
BT	-	SMBJ18CA	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BT	-	SMF18A	ESDP-diode	Vbr=20.0V, Vrwm=18V, Ipp=5.8A, 200W(1ms)	SMF	7d	2y	Vs
BT	-	SMF18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, Ipp=6.8A, 200W(1ms)	SMF	1d	2sa	Lif
BT	-	SMP18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, Ipp=13.7A, 400W(1ms)	DO-220AA	8d	1a	Vs
BT	-	TFZ33B	Zener diode	30.32..31.88V, Izt=5mA, Zzt=65Ω, 500mW	TUMD2	7d	2x	Rhm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BT	-	TV04A180J-G	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=13.70A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BT	-	TV06B180JB-G	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=17.64A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BT	-	UDZ30B	Zener diode	30V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BT2	-	BAT43BPT	Si-diode	SBD, 30V, 200mA, Vf<1V(200mA), 5ns	SOD-123	5d	1a	Chm
BT3	-	BAT46BPT	Si-diode	SBD, 100V, 75mA, Vf<1V(200mA), 5ns	SOD-123	5d	1a	Chm
BT7	-	SM6T22CA	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, 20A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BTA	-	TPSMA6L18A	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=20.6A, 600W(1ms)	DO-221AC	1d	2s	Lif
BTJ	-	P4SMA33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BTK	-	SMA33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 8.8A, 400W(1ms)	DO-214AC	1d	1a	Lge
BTM	-	SMA33CA	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 8.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BTP	-	SMAJ18CA	TVS	Vrwm=18V, Vbr=20.0..22.1V, 13.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BTP	-	TPSMA33A	TVS	Vrwm=3V, Ipp=8.8A, 400W (1ms)	DO-214AC	1d	1k	Vs
BTP	-	TPSMP33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, Ipp=8.8A, 400W(1ms)	DO-220AA	8d	1a	Vs
BU	-	BAT54	Si-diode	SBR, 30V, 200mA, Vf<0.52V(100mA), <5ns	SOD-123	5d	1a	Ons
BU	-	BZT52H-C27	Zener diode	27V±5%, Izt=5mA, Zzt=40Ω, 375mW	SOD-123FL	7d	1a	Phi
BU	-	BZX399-C27	Zener diode	27V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BU	-	P4SMA36	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 400W(1ms)	DO-214AC	1d	2j	Fag
BU	-	P4SMAJ20	TVS	Vrwm=20V, 11.1A, 400W (1ms)	DO-214AB	1d	1a	Lsr
BU	-	P6SMBJ20C	TVS	Vrwm=20V, Vbr=18..22V, 216.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BU	-	PMF19A	TVS	Vbr=21.1..23.3V, Vrwm=19V, Ipp=6.54A, 200W(1ms)	SOD-123FL	7d	1a	Shp
BU	-	SMAJ20	TVS	Vrwm=20V, Vbr=22.2..27.1V, 11.2A, 400W(1ms)	DO-214AC	1d	1k	Vs
BU	-	SMBG20C	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BU	-	SMBJ20C	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BU	-	SMP20	TVS	Vbr=22.2..27.1V, Vrwm=20V, Ipp=11.2A, 400W(1ms)	DO-220AA	8d	1a	Vs
BU	-	TFZ36B	Zener diode	32.79..34.49V, Izt=5mA, Zzt=75Ω, 500mW	TUMD2	7d	2x	Rhm
BU	-	TV04A200K-G	TVS	Vrwm=20.0V, Vbr=22.20..27.10V, Ipp=11.17A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BU	-	TV06B200KB-G	TVS	Vrwm=20.0V, Vbr=22.20..27.10V, Ipp=19.76A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BU	-	UDZ33B	Zener diode	33V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BUA	-	SMBJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, 58.3A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUB	-	SMBJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUC	-	SMBJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 41.7A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUD	-	SMBJ10A	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUE	-	SMBJ12A	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUF	-	SMBJ13A	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUG	-	SMBJ15A	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUH	-	SMBJ18A	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUI	-	SMBJ20A	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUJ	-	P4SMA36	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 8.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BUJ	-	SMBJ24A	TVS	Vrwm=24V, Vbr=26.7..30.7V, 15.4A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUK	-	SMA36	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 7.7A, 400W(1ms)	DO-214AC	1d	1a	Lge
BUK	-	SMBJ26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, 14.2A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUL	-	SMBJ28A	TVS	Vrwm=28V, Vbr=31.1..35.8V, 13.2A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUM	-	SMA36C	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 7.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BUM	-	SMBJ30A	TVS	Vrwm=30V, Vbr=33.1..38.3V, 12.4A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUN	-	SMBJ33A	TVS	Vrwm=33V, Vbr=36.7..42.2V, 11.3A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUO	-	SMBJ58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, 6.4A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUP	-	SMAJ20C	TVS	Vrwm=20V, Vbr=22.2..27.1V, 11.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BUP	-	TPSMA36	TVS	Vrwm=36V, Ipp=7.7A, 400W (1ms)	DO-214AC	1d	1k	Vs
BUP	-	TPSMP36	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, Ipp=7.7A, 400W(1ms)	DO-220AA	8d	1a	Vs
BUQ	-	SMBJ85A	TVS	Vrwm=85V, Vbr=94.4..108.2V, 4.4A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUS	-	SMBJ130A	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUT	-	SMBJ154A	TVS	Vrwm=154V, Vbr=167..211.5V, 2.4A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUU	-	SMBJ170A	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUV	-	SMBJ188A	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUW	-	SMBJ48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms)	DO-214AA	1d	1q	Ste
BUZ	-	SMBJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms)	DO-214AA	1d	1q	Ste
BV	-	BZT52H-C30	Zener diode	30.0V±5%, Izt=5mA, Zzt=40Ω, 375mW	SOD-123FL	7d	1a	Phi
BV	-	BZX399-C30	Zener diode	30V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BV	-	CD214B-T20CA	TVS	Vrwm=20V, Irsm=18.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
BV	-	MSMP20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, Ipp=23.4A, 150W (1ms)	MicroSMP	8d	1k	Vs
BV	-	P4SMA36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 400W(1ms)	DO-214AC	1d	2j	Fag
BV	-	P4SMAJ20A	TVS	Vrwm=20V, 12.3A, 400W (1ms)	DO-214AC	1d	1a	Lsr
BV	-	P6SMBJ20CA	TVS	Vrwm=20V, Vbr=18..22V, 218.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BV	-	PMF20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, Ipp=6.17A, 200W(1ms)	SOD-123FL	7d	1a	Shp
BV	-	SMA6L20A	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, 18.6A, 600W(1ms)	DO-221AC	7d	2s	Lif
BV	-	SMAJ20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, 12.3A, 400W(1ms)	DO-214AC	1d	1k	Vs
BV	-	SMBG20CA	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BV	-	SMBJ20CA	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BV	-	SMBJ20CA	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
BV	-	SMF20A	ESDP-diode	Vbr=22.2V, Vrwm=20V, Ipp=6.2A, 200W(1ms)	SMF	7d	2y	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BV	-	SMF20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, Ipp=6.2A, 200W(1ms)	SMF	1d	2sa	Lif
BV	-	SMP20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, Ipp=12.3A, 400W(1ms)	DO-220AA	8d	1a	Vs
BV	-	TFZ39B	Zener diode	35.36..37.19V, Izt=5mA, Zzt=85Ω, 500mW	TUMD2	7d	2x	Rhm
BV	-	TV04A200J-G	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=12.35A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BV	-	TV06B200JB-G	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=18.52A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BV	-	UDZ36B	Zener diode	36V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BVA	-	SMBJ22A	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms)	DO-214AA	1d	1q	Ste
BVA	-	TPSMA6L20A	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=18.6A, 600W(1ms)	DO-221AC	1d	2s	Lif
BVJ	-	P4SMA36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BVK	-	SMA36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.0A, 400W(1ms)	DO-214AC	1d	1a	Lge
BVM	-	SMA36CA	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BVP	-	SMAJ20CA	TVS	Vrwm=20V, Vbr=22.2..24.5V, 12.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BVP	-	TPSMA36A	TVS	Vrwm=36V, Ipp=8.0A, 400W (1ms)	DO-214AC	1d	1k	Vs
BVP	-	TPSMP36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, Ipp=8.0A, 400W(1ms)	DO-220AA	8d	1a	Vs
BW	-	BZT52H-C33	Zener diode	33.0V±5%, Izt=5mA, Zzt=40Ω, 375mW	SOD-123FL	7d	1a	Phi
BW	-	BZX399-C33	Zener diode	33V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BW	-	P4SMA39	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 400W(1ms)	DO-214AC	1d	2j	Fag
BW	-	P4SMAJ22	TVS	Vrwm=22V, 10.1A, 400W (1ms)	DO-214AC	1d	1a	Lsr
BW	-	P6SMBJ22C	TVS	Vrwm=22V, Vbr=19.8..24.2V, 15.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BW	-	SMAJ22	TVS	Vrwm=22V, Vbr=24.4..29.8V, 10.2A, 400W(1ms)	DO-214AC	1d	1k	Vs
BW	-	SMBG22C	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BW	-	SMBJ22C	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BW	-	SMP22	TVS	Vbr=24.4..29.8V, Vrwm=22V, Ipp=10.2A, 400W(1ms)	DO-220AA	8d	1a	Vs
BW	-	TV04A220K-G	TVS	Vrwm=22.0V, Vbr=24.40..29.80V, Ipp=10.15A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BW	-	TV06B220KB-G	TVS	Vrwm=22.0V, Vbr=24.40..29.80V, Ipp=15.23A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BW	-	UDZ39B	Zener diode	39V±2.5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
BWJ	-	P4SMA39	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 7.4A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BWK	-	SMA39	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 7.1A, 400W(1ms)	DO-214AC	1d	1a	Lge
BWM	-	SMA39C	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 7.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BWP	-	SMAJ22C	TVS	Vrwm=22V, Vbr=24.4..29.8V, 10.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BWP	-	TPSMA39	TVS	Vrwm=39V, Ipp=7.1A, 400W (1ms)	DO-214AC	1d	1k	Vs
BWP	-	TPSMP39	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, Ipp=7.1A, 400W(1ms)	DO-220AA	8d	1a	Vs
BX	-	BZT52H-C36	Zener diode	36.0V±5%, Izt=5mA, Zzt=60Ω, 375mW	SOD-123FL	7d	1a	Phi
BX	-	BZX399-C36	Zener diode	36V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BX	-	CD214B-T22CA	TVS	Vrwm=22V, Irsm=16.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
BX	-	MM1Z4689	Zener diode	4.85..5.36V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
BX	-	MMSZ4689	Zener diode	5.1V±5%, Izt=50μA, 500mW	SOD-123	5d	1a	Eic
BX	-	P4SMA39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 400W(1ms)	DO-214AC	1d	2j	Fag
BX	-	P4SMAJ22A	TVS	Vrwm=22V, 11.2A, 400W (1ms)	DO-214AC	1d	1a	Lsr
BX	-	P6SMBJ22CA	TVS	Vrwm=22V, Vbr=19.8..24.2V, 16.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BX	-	PMF22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, Ipp=5.63A, 200W(1ms)	SOD-123FL	7d	1a	Shp
BX	-	SMA6L22A	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, 16.9A, 600W(1ms)	DO-221AC	7d	2s	Lif
BX	-	SMAJ22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, 11.3A, 400W(1ms)	DO-214AC	1d	1k	Vs
BX	-	SMBG22CA	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BX	-	SMBJ22CA	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
BX	-	SMBJ22CA	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BX	-	SMF22A	ESDP-diode	Vbr=24.4V, Vrwm=22V, Ipp=5.6A, 200W(1ms)	SMF	7d	2y	Vs
BX	-	SMF22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, Ipp=5.6A, 200W(1ms)	SMF	1d	2sa	Lif
BX	-	SMP22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, Ipp=11.3A, 400W(1ms)	DO-220AA	8d	1a	Vs
BX	-	TV04A220J-G	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=11.27A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BX	-	TV06B220JB-G	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=16.90A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BX	-	UDZ43B	Zener diode	43V±2.5%, Izt=2mA, 200mW	SOD-323	5d	1d	Di
BX7	-	SM6T27CA	TVS	Vrwm=23.1V, Vbr=25.7..28.4V, 16A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BXA	-	TPSMA6L22A	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=16.9A, 600W(1ms)	DO-221AC	1d	2s	Lif
BXJ	-	P4SMA39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BXK	-	SMA39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.4A, 400W(1ms)	DO-214AC	1d	1a	Lge
BXM	-	SMA39CA	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BXP	-	SMAJ22CA	TVS	Vrwm=22V, Vbr=24.4..26.9V, 11.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BXP	-	TPSMA39A	TVS	Vrwm=39V, Ipp=7.4A, 400W (1ms)	DO-214AC	1d	1k	Vs
BXP	-	TPSMP39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, Ipp=7.4A, 400W(1ms)	DO-220AA	8d	1a	Vs
BY	-	BZT52H-C39	Zener diode	39.0V±5%, Izt=5mA, Zzt=75Ω, 375mW	SOD-123FL	7d	1a	Phi
BY	-	BZX399-C39	Zener diode	39V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BY	-	KDZ2.2VVY	Zener diode	2.16..2.38V, Izt=5mA, Zzt=100Ω, 100mW	VSC	7d	1a	Kec
BY	-	MM1Z4690	Zener diode	5.32..5.88V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
BY	-	MMSZ4690	Zener diode	5.6V±5%, Izt=50μA, 500mW	SOD-123	5d	1a	Eic
BY	-	P4SMA43	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 400W(1ms)	DO-214AC	1d	2j	Fag
BY	-	P4SMAJ24	TVS	Vrwm=24V, 9.3A, 400W (1ms)	DO-214AC	1d	1a	Lsr
BY	-	P6SMBJ24C	TVS	Vrwm=24V, Vbr=21.6..26.4V, 17A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BY	-	SMAJ24	TVS	Vrwm=24V, Vbr=26.7..32.6V, 9.3A, 400W(1ms)	DO-214AC	1d	1k	Vs
BY	-	SMBG11C	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
BY	-	SMBG24C	TVS	Vrwm=24V, Vbr=26.7..33.8V, 14.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BY	-	SMBJ11C	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BY	-	SMBJ24C	TVS	Vrwm=24V, Vbr=26.7..33.8V, 14.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BY	-	SMP24	TVS	Vbr=26.7..32.6V, Vrwm=24V, Ipp=9.3A, 400W(1ms)	DO-220AA	8d	1a	Vs
BY	-	TV04A240K-G	TVS	Vrwm=24.0V, Vbr=26.70..32.60V, Ipp=9.30A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BY	-	TV06B240KB-G	TVS	Vrwm=24.0V, Vbr=26.70..32.60V, Ipp=13.95A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BY	-	UDZ47B	Zener diode	47V±2.5%, Izt=2mA, 200mW	SOD-323	5d	1d	Di
BYJ	-	P4SMA43	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 6.8A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BYK	-	SMA43	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 6.5A, 400W(1ms)	DO-214AC	1d	1a	Lge
BYM	-	SMA43C	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 6.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BYP	-	SMAJ24C	TVS	Vrwm=24V, Vbr=26.7..32.6V, 9.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BYP	-	TPSMA43	TVS	Vrwm=43V, Ipp=6.5A, 400W (1ms)	DO-214AC	1d	1k	Vs
BYP	-	TPSMP43	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, Ipp=6.5A, 400W(1ms)	DO-220AA	8d	1a	Vs
BZ	-	BZT52B6V8S	Zener diode	6.66..6.94V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323FL	7d	1a	Tsc
BZ	-	BZT52H-C43	Zener diode	43.0V±5%, Izt=5mA, Zzt=80Ω, 375mW	SOD-123FL	7d	1a	Phi
BZ	-	BZX399-C43	Zener diode	43V±5%, If=250mA, 300mW	SOD-323	5d	1a	Phi
BZ	-	CD214B-T24CA	TVS	Vrwm=24V, Irsm=15.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
BZ	-	MM1Z4691	Zener diode	5.89..6.51V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
BZ	-	MM3Z6V8B	Zener diode	6.66..6.94V, Zzt=14Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
BZ	-	MM3Z6V8BW	Zener diode	6.66..6.94V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323FL	7d	1a	Tac
BZ	-	MMSZ4691	Zener diode	6.2V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
BZ	-	P4SMA43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 400W(1ms)	DO-214AC	1d	2j	Fag
BZ	-	P4SMAJ24A	TVS	Vrwm=24V, 10.3A, 400W (1ms)	DO-214AC	1d	1a	Lsr
BZ	-	P6SMBJ24CA	TVS	Vrwm=24V, Vbr=21.6..26.4V, 18A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
BZ	-	PMF24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, Ipp=5.14A, 200W(1ms)	SOD-123FL	7d	1a	Shp
BZ	-	SMA6L24A	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, 15.5A, 600W(1ms)	DO-221AC	7d	2s	Lif
BZ	-	SMAJ24A	TVS	Vrwm=24V, Vbr=26.7..29.5V, 10.3A, 400W(1ms)	DO-214AC	1d	1k	Vs
BZ	-	SMBG11CA	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BZ	-	SMBG24CA	TVS	Vrwm=24V, Vbr=26.7..30.7V, 15.4A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
BZ	-	SMBJ11CA	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BZ	-	SMBJ24CA	TVS	Vrwm=24V, Vbr=26.7..30.7V, 15.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
BZ	-	SMBJ24CA	TVS	Vrwm=24V, Vbr=26.7..30.7V, 15.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
BZ	-	SMF24A	ESDP-diode	Vbr=26.7V, Vrwm=24V, Ipp=5.1A, 200W(1ms)	SMF	7d	2y	Vs
BZ	-	SMF24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, Ipp=5.1A, 200W(1ms)	SMF	1d	2sa	Lif
BZ	-	SMP24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, Ipp=10.3A, 400W(1ms)	DO-220AA	8d	1a	Vs
BZ	-	TCMM3Z6V8B	Zener diode	6.8V±2%, Izt=5mA, Zzt=14Ω, 200mW	SOD-323FL	7d	1a	Tac
BZ	-	TV04A240J-G	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=10.28A, 400W(1ms)	DO-214AC	1d	2o	Cmc
BZ	-	TV06B240JB-G	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=15.42A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
BZ	-	UDZ51B	Zener diode	51V±2.5%, Izt=2mA, 200mW	SOD-323	5d	1d	Di
BZA	-	TPSMA6L24A	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=15.5A, 600W(1ms)	DO-221AC	1d	2s	Lif
BZJ	-	P4SMA43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 400W(1ms)	DO-214AC	1d	1a	Tsc
BZK	-	SMA43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 6.7A, 400W(1ms)	DO-214AC	1d	1a	Lge
BZM	-	SMA43CA	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 6.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
BZP	-	SMAJ24CA	TVS	Vrwm=24V, Vbr=26.7..29.5V, 10.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
BZP	-	TPSMA43A	TVS	Vrwm=43V, Ipp=6.7A, 400W (1ms)	DO-214AC	1d	1k	Vs
BZP	-	TPSMP43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, Ipp=6.7A, 400W(1ms)	DO-220AA	8d	1a	Vs
C	-	BB179B	C-diode	TV-VHF-tuning, VCO, 30V, 20mA, 18.22..1.9pF(1..28V)	SOD-523	6d	1a	Phi
C	-	BB565-02V	C-diode	UHF TV-tuning, 30V, 20mA, 2.2..21.5pF(28..1V)	SC-79	6d	1u	Inf
C	-	CDZ6.2B	Zener diode	6.2V±2.5%, Izt=40mA, 1W	VMN	7d	1s	Rhm
C	-	CH521S-30PT	Si-diode	SBD, 30V, 200mA, Vf<0.5V(200mA)	SOD-523	8d	1a	Chm
C	-	DSE010	Si-diode	Sw, Hi-sp, 90V, 150mA, Vf<1.2V(100mA), 3pF, 4ns	SOD-523	6d	1a	San
C	-	FSS16M	Si-diode	SBR, 60V, 1A, Vf<0.64V(1A)	MicroSMA	7d	2ja	Fag
C	-	GBLC03I	TVS	Vrwm=3V, 5A, 350W(1ms), 0.6pF	SOD-323	5d	1a	Prt
C	-	HVR17	C-diode	FM-tuning, 15V, 50..8.84pF(1..4.5V)	SOD-123	5d	1a	Ren
C	-	RB521S-30	Si-diode	SBR, 30V, 200mA, Vf<0.5V(200mA)	SOD-523	6d	1a	Rhm
C	au	CDZ15B	Zener diode	15V±2.5%, Izt=20mA, 1W	VMN	7d	1s	Rhm
C	au	MMSZ5252BPT	Zener diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 225mW	SOD-523	6d	1a	Chm
C	ba	BAT65	Si-diode	Schottky, 30V, 500mA, Vf<0.7V(500mA), Cd<12pF	SOD-123	5d	2	Inf
C.	au	MMSZ5252SPT	Zener diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 225mW	SOD-523	6d	1a	Chm
C.0	-	MMSZ5225C-V-G	Zener diode	3.0V±2%, Izt=20mA, Zzt=29Ω, 500mW	SOD-123	5d	1kb	Vs
C0	-	BZX585-B5V6	Zener diode	5.6V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
C0	-	MM3Z2V2	Zener diode	2.08..2.33V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323FL	7d	1a	Lge
C0	-	MMPZ5233BPT	Zener diode	5.700..6.300V, Izt=5mA, Zzt=25Ω, 225mW	SOD-323	5d	1a	Chm
C0	-	MMSZ5225B-V-G	Zener diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 500mW	SOD-123	5d	1kb	Vs
C02	-	CMR1-02	Si-diode	GP, Rectifer, 100V, 1A, Vf<1.1V(1A)	DO-214AA	1d	1a	Cen
C02M	-	CMR1-02M	Si-diode	GP, Rectifer, 100V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1a	Cen
C03	-	CMHD2003	Si-diode	HV, Sw, 250V, 250mA, 400mW, Vf<1V(100mA), 1.5pF	SOD-123	5d	1a	Cen
C04	-	CMR1-04	Si-diode	GP, Rectifer, 400V, 1A, Vf<1.1V(1A)	DO-214AA	1d	1a	Cen
C04M	-	CMR1-04M	Si-diode	GP, Rectifer, 400V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1a	Cen
C06	-	CMR1-06	Si-diode	GP, Rectifer, 600V, 1A, Vf<1.1V(1A)	DO-214AA	1d	1a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
C06M	-	CMR1-06M	Si-diode	GP, Rectifer, 600V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1a	Cen
C1	-	1SS352	Si-diode	Sw, U-Fast, 80V, 100mA, 200mW, 0.5pF, 1.6ns	SOD-323	5d	1a	Tos
C1	-	1SS368	Si-diode	Sw, U-Fast, 80V, 100mA, 200mW, 0.5pF, 1.6ns	SOD-323	5d	1a	Tos
C1	-	1SS387	Si-diode	Sw, Fast, 85V, 100mA, <4ns	SOD-323	5d	1a	Tos
C1	-	BZT52H-C47	Zener diode	47.0V±5%, Izt=5mA, Zzt=90Ω, 375mW	SOD-123FL	7d	1a	Phi
C1	-	BZX384B2V4-V-G	Zener diode	2.4V±2.5%, Izt=5mA, Zzt=70Ω, 200mW	SOD-323	5d	2m	Vs
C1	-	BZX585-B2V4	Zener diode	2.4V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
C1	-	CZRH5221B-G	Zener diode	2.28..2.52V, Zzt=30Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
C1	-	CZRV5221B-G	Zener diode	2.28..2.52V, Zzt=30Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
C1	-	CZRW5221B-G	Zener diode	2.28..2.52V, Zzt=30Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
C1	-	FSS32	Si-diode	SBR, 20V, 3A, Vf<0.75V(3A)	DO-214AB	1d	2j	Fag
C1	-	LMSZ5221BT1G	Zener diode	2.28..2.525V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
C1	-	MAZF043	Zener diode	4..4.6V, Zzt=130Ω(5mA), 120mW	S-Mini	8d	1a	Pan
C1	-	MAZN043	Zener diode	4..4.6V, Zzt=130Ω(5mA), 120mW	SSMini2	7d	1a	Pan
C1	-	MM3Z5221B	Zener diode	2.28..2.52V, Izt=20mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Ext
C1	-	MM3Z5225B	Zener diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 200mW	SOD-323FL	7d	1a	Bts
C1	-	MM3Z5225BH	Zener diode	2.85..3.15V, Izt=20mA, Zzt=29Ω, 300mW	SOD-323	5d	1a	Zow
C1	-	MMBZ5221BV	Zener diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-523	6d	1a	Pjt
C1	-	MMSZ5221B	Zener diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123	5d	1d	Di
C1	-	MMSZ5221BS	Zener diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-323	5d	1d	Di
C1	-	MMSZ5221BWS	Zener diode	2.28..2.52V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
C1	-	OYD2V4T1	Zener diode	2.28...2.56V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1a	Ouy
C1	-	RKZ2.0BKK	Zener diode	1.90..2.20V, Izt=5mA, Zzt=100Ω, 150mW	SFP	7d	1a	Ren
C1	-	RKZ2.0BKL	Zener diode	1.90..2.20V, Izt=5mA, Zzt=100Ω, 100mW	EFP	7d	1a	Ren
C1	ag	MMSZ5221B	Zener diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123	5d	1d	Di
C10	-	BZG03-C10	Zener diode	10V±5%, Izt=50mA, Zzt=2Ω, 1.25W	DO-214AC	1d	1a	Eic
C10	-	CMR1-10	Si-diode	GP, Rectifer, 1000V, 1A, Vf<1.1V(1A)	DO-214AA	1d	1a	Cen
C10	-	SMA5C10	Zener diode	10V±5%, Izt=25mA, Zzt<7Ω, 3W	DO-214AC	1d	1a	Mco
C10	-	SMBJ-LC10	TVS	Vbr=11.9..14.4V, Vrwm=10V, 31.9A, 600W(1ms)	DO-214AA	1d	1a	Eic
C10	-	SMCG10	TVS	Vrwm=10V, 79.8A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C100	-	BZG03-C100	Zener diode	100V±5%, Izt=5mA, Zzt=60Ω, 1.25W	DO-214AC	1d	1a	Eic
C100	-	SMBJ-LC100	TVS	Vbr=111.8..136.8V, Vrwm=100V, 3.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
C100	-	SMCG100	TVS	Vrwm=100V, 8.4A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C100A	-	1.5SMC100A	TVS	Vrwm=85.5V, Vbr=95..105V, Ipp=11A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C100A	-	P6SMB100A	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms)	DO-214AA	1d	1a	Cen
C100A	-	SMBJ-LC100A	TVS	Vbr=111.8..123.8V, Vrwm=100V, 3.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
C100A	-	SMCG100A	TVS	Vrwm=100V, 9.3A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C100A	-	SMCJ100A	TVS	Vrwm=100V, Vbr=111..136V, 8.4A, 1500W(1ms)	DO-214AB	1d	1a	Msc
C100C	-	1.5SMC100CA	TVS	Vrwm=85.5V, Vbr=95..105V, Ipp=11A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C100C	-	P6SMB100CA	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C100C	-	SMCG100C	TVS	Vrwm=100V, 8.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C100CA	-	SMCG100CA	TVS	Vrwm=100V, 9.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C100CA	-	SMCJ100CA	TVS	Vrwm=100V, Vbr=111..136V, 8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
C10A	-	1.5SCMJ16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C10A	-	1.5SMC10A	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, Ipp=103A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C10A	-	P6SMB10A	TVS	Vrwm=10V, Vbr=9.5..10.5V, 41.4A, 600W(1ms)	DO-214AA	1d	1a	Cen
C10A	-	SMBJ-LC10A	TVS	Vbr=11.9..13.1V, Vrwm=10V, 35.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
C10A	-	SMCG10A	TVS	Vrwm=10V, 88.2A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C10A	-	SMCJ10A	TVS	Vrwm=10V, Vbr=11.1..12.8V, 88.2A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C10C	-	1.5SCMJ16CA	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C10C	-	1.5SMC10CA	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, Ipp=103A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C10C	-	P6SMB10CA	TVS	Vrwm=10V, Vbr=9.5..10.5V, 41.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C10C	-	SMCG10C	TVS	Vrwm=10V, 79.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C10CA	-	SMCG10CA	TVS	Vrwm=10V, 88.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C10CA	-	SMCJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.8V, 88.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C10M	-	CMR1-10M	Si-diode	GP, Rectifer, 1000V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1a	Cen
C11	-	BZG03-C11	Zener diode	11V±5%, Izt=50mA, Zzt=4Ω, 1.25W	DO-214AC	1d	1a	Eic
C11	-	SMA5C11	Zener diode	11V±5%, Izt=20mA, Zzt<8Ω, 3W	DO-214AC	1d	1a	Mco
C11	-	SMBJ-LC11	TVS	Vbr=13.0..15.7V, Vrwm=11V, 29.9A, 600W(1ms)	DO-214AA	1d	1a	Eic
C11	-	SMCG11	TVS	Vrwm=11V, 74.6A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C110	-	BZG03-C110	Zener diode	110V±5%, Izt=5mA, Zzt=80Ω, 1.25W	DO-214AC	1d	1a	Eic
C110	-	SMBJ-LC110	TVS	Vbr=122.8..149.8V, Vrwm=110V, 3.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
C110	-	SMCG110	TVS	Vrwm=110V, 7.7A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C110A	-	1.5SMC110A	TVS	Vrwm=94V, Vbr=105..116V, Ipp=9.9A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C110A	-	P6SMB110A	TVS	Vrwm=110V, Vbr=105..116V, 3.9A, 600W(1ms)	DO-214AA	1d	1a	Cen
C110A	-	SMBJ-LC110A	TVS	Vbr=122.8..135.8V, Vrwm=110V, 3.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
C110A	-	SMCG110A	TVS	Vrwm=110V, 8.5A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C110A	-	SMCJ110A	TVS	Vrwm=110V, Vbr=122..140.5V, 8.4A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C110C	-	1.5SMC110CA	TVS	Vrwm=94V, Vbr=105..116V, Ipp=9.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C110C	-	P6SMB110CA	TVS	Vrwm=110V, Vbr=105..116V, 3.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
C110C	-	SMCG110C	TVS	Vrwm=110V, 7.7A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C110CA	-	SMCG110CA	TVS	Vrwm=110V, 8.5A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C110CA	-	SMCJ110CA	TVS	Vrwm=110V, Vbr=122..140.5V, 8.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C11A	-	1.5SCMJ18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C11A	-	1.5SMC11A	TVS	Vrwm=9.4V, Vbr=10.5..11.6V, Ipp=96A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C11A	-	P6SMB11A	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38.5A, 600W(1ms)	DO-214AA	1d	1a	Cen
C11A	-	SMBJ-LC11A	TVS	Vbr=13.0..14.3V, Vrwm=11V, 33.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
C11A	-	SMCG11A	TVS	Vrwm=11V, 82.4A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C11A	-	SMCJ11A	TVS	Vrwm=11V, Vbr=12.2..14V, 82.4A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C11C	-	1.5SCMJ18CA	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C11C	-	1.5SMC11CA	TVS	Vrwm=9.4V, Vbr=10.5..11.6V, Ipp=96A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C11C	-	P6SMB11CA	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C11C	-	SMCG11C	TVS	Vrwm=11V, 74.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C11CA	-	SMCG11CA	TVS	Vrwm=11V, 82.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C11CA	-	SMCJ11CA	TVS	Vrwm=11V, Vbr=12.2..14V, 82.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C12	-	BZG03-C12	Zener diode	12V±5%, Izt=50mA, Zzt=4Ω, 1.25W	DO-214AC	1d	1a	Eic
C12	-	SMA5C12	Zener diode	12V±5%, Izt=20mA, Zzt<9Ω, 3W	DO-214AC	1d	1a	Mco
C12	-	SMBJ-LC12	TVS	Vbr=14.1..17.1V, Vrwm=12V, 27.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
C12	-	SMCG12	TVS	Vrwm=12V, 68.2A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C120	-	BZG03-C120	Zener diode	120V±5%, Izt=5mA, Zzt=80Ω, 1.25W	DO-214AC	1d	1a	Eic
C120	-	SMBJ-LC120	TVS	Vbr=133.8..163.8V, Vrwm=120V, 2.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
C120	-	SMCG120	TVS	Vrwm=120V, 7A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C120A	-	1.5SMC120A	TVS	Vrwm=102V, Vbr=114..126V, Ipp=9.1A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C120A	-	P6SMB120A	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms)	DO-214AA	1d	1a	Cen
C120A	-	SMBJ-LC120A	TVS	Vbr=133.8..147.8V, Vrwm=120V, 3.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
C120A	-	SMCG120A	TVS	Vrwm=120V, 7.8A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C120A	-	SMCJ120A	TVS	Vrwm=120V, Vbr=133..153V, 7.9A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C120C	-	1.5SMC120CA	TVS	Vrwm=97.2V, Vbr=108..132V, Ipp=8.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C120C	-	P6SMB120CA	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C120C	-	SMCG120C	TVS	Vrwm=120V, 7A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C120CA	-	SMCG120CA	TVS	Vrwm=120V, 7.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C120CA	-	SMCJ120CA	TVS	Vrwm=120V, Vbr=133..153V, 7.9A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C12A	-	1.5SCMJ20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C12A	-	1.5SMC12A	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, Ipp=90A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C12A	-	P6SMB12A	TVS	Vrwm=12V, Vbr=11.4..12.6V, 35.9A, 600W(1ms)	DO-214AA	1d	1a	Cen
C12A	-	SMBJ-LC12A	TVS	Vbr=14.1..15.5V, Vrwm=12V, 30.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
C12A	-	SMCG12A	TVS	Vrwm=12V, 75.4A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C12A	-	SMCJ12A	TVS	Vrwm=12V, Vbr=13.3..15.3V, 75.3A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C12C	-	1.5SCMJ20CA	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C12C	-	1.5SMC12CA	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, Ipp=90A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C12C	-	P6SMB12CA	TVS	Vrwm=12V, Vbr=11.4..12.6V, 35.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C12C	-	SMCG12C	TVS	Vrwm=12V, 68.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C12CA	-	SMCG12CA	TVS	Vrwm=12V, 75.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C12CA	-	SMCJ12CA	TVS	Vrwm=12V, Vbr=13.3..15.3V, 75.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C13	-	BZG03-C13	Zener diode	13V±5%, Izt=50mA, Zzt=5Ω, 1.25W	DO-214AC	1d	1a	Eic
C13	-	SMA5C13	Zener diode	13V±5%, Izt=20mA, Zzt<10Ω, 3W	DO-214AC	1d	1a	Mco
C13	-	SMBJ-LC13	TVS	Vbr=15.2..18.4V, Vrwm=13V, 25.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
C13	-	SMCG13	TVS	Vrwm=13V, 63.A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C130	-	BZG03-C130	Zener diode	130V±5%, Izt=5mA, Zzt=110Ω, 1.25W	DO-214AC	1d	1a	Eic
C130	-	SMBJ-LC130	TVS	Vbr=144.8..176.8V, Vrwm=130V, 2.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
C130	-	SMCG130	TVS	Vrwm=130V, 6.5A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C130A	-	1.5SMC130A	TVS	Vrwm=111V, Vbr=124..137V, Ipp=8.4A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C130A	-	P6SMB130A	TVS	Vrwm=130V, Vbr=124..137V, 3.4A, 600W(1ms)	DO-214AA	1d	1a	Cen
C130A	-	SMBJ-LC130A	TVS	Vbr=144.8..159.8V, Vrwm=130V, 2.9A, 600W(1ms)	DO-214AA	1d	1a	Eic
C130A	-	SMCG130A	TVS	Vrwm=130V, 7.2A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C130A	-	SMCJ130A	TVS	Vrwm=130V, Vbr=144..165.5V, Vcl=209V, 7.A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C130C	-	1.5SMC130CA	TVS	Vrwm=111V, Vbr=124..137V, Ipp=8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C130C	-	P6SMB130CA	TVS	Vrwm=130V, Vbr=124..137V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C130C	-	SMCG130C	TVS	Vrwm=130V, 6.5A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C130CA	-	SMCG130CA	TVS	Vrwm=130V, 7.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C130CA	-	SMCJ130CA	TVS	Vrwm=130V, Vbr=144..165.5V, 7.A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C13A	-	1.5SCMJ22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C13A	-	1.5SMC13A	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, Ipp=82A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C13A	-	P6SMB13A	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms)	DO-214AA	1d	1a	Cen
C13A	-	SMBJ-LC13A	TVS	Vbr=15.2..16.7V, Vrwm=13V, 27.9A, 600W(1ms)	DO-214AA	1d	1a	Eic
C13A	-	SMCG13A	TVS	Vrwm=13V, 69.8A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C13A	-	SMCJ13A	TVS	Vrwm=13V, Vbr=14.4..16.5V, 69.7A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C13C	-	1.5SCMJ22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C13C	-	1.5SMC13CA	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, Ipp=82A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C13C	-	P6SMB13CA	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
C13C	-	SMCG13C	TVS	Vrwm=13V, 63.A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C13CA	-	SMCG13CA	TVS	Vrwm=13V, 69.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C13CA	-	SMCJ13CA	TVS	Vrwm=13V, Vbr=14.4..16.5V, 69.7A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C14	-	SMBJ-LC14	TVS	Vbr=16.4..19.9V, Vrwm=14V, 23.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
C14	-	SMCG14	TVS	Vrwm=14V, 58.1A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C14A	-	1.5SCMJ24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C14A	-	SMBJ-LC14A	TVS	Vbr=16.4..18.0V, Vrwm=14V, 25.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
C14A	-	SMCG14A	TVS	Vrwm=14V, 64.7A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C14A	-	SMCJ14A	TVS	Vrwm=14V, Vbr=15.6..17.9V, 64.7A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C14C	-	1.5SCMJ24CA	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C14C	-	SMCG14C	TVS	Vrwm=14V, 58.1A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C14CA	-	SMCG14CA	TVS	Vrwm=14V, 64.7A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C14CA	-	SMCJ14CA	TVS	Vrwm=14V, Vbr=15.6..17.9V, 64.7A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C15	-	BZG03-C15	Zener diode	15V±5%, Izt=50mA, Zzt=5Ω, 1.25W	DO-214AC	1d	1a	Eic
C15	-	SMA5C15	Zener diode	15V±5%, Izt=15mA, Zzt<15Ω, 3W	DO-214AC	1d	1a	Mco
C15	-	SMBJ-LC15	TVS	Vbr=17.5..21.2V, Vrwm=15V, 22.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
C15	-	SMCG15	TVS	Vrwm=15V, 55.8A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C150	-	BZG03-C150	Zener diode	150V±5%, Izt=5mA, Zzt=130Ω, 1.25W	DO-214AC	1d	1a	Eic
C150	-	SMBJ-LC150	TVS	Vbr=167.8..204.8V, Vrwm=150V, 2.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
C150	-	SMCG150	TVS	Vrwm=150V, 5.6A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C150A	-	1.5SMC150A	TVS	Vrwm=128V, Vbr=143..158V, Ipp=7.2A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C150A	-	P6SMB150A	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms)	DO-214AA	1d	1a	Cen
C150A	-	SMBJ-LC150A	TVS	Vbr=167.8..185.8V, Vrwm=150V, 2.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
C150A	-	SMCG150A	TVS	Vrwm=150V, 6.2A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C150A	-	SMCJ150A	TVS	Vrwm=150V, Vbr=167..192.5V, 6.2A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C150C	-	1.5SMC150CA	TVS	Vrwm=128V, Vbr=143..158V, Ipp=7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C150C	-	P6SMB150CA	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C150C	-	SMCG150C	TVS	Vrwm=150V, 5.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C150CA	-	SMCG150CA	TVS	Vrwm=150V, 6.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C150CA	-	SMCJ150CA	TVS	Vrwm=150V, Vbr=167..192.5V, 6.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C15A	-	1.5SCMJ27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C15A	-	1.5SMC15A	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, Ipp=71A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C15A	-	P6SMB15A	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28.3A, 600W(1ms)	DO-214AA	1d	1a	Cen
C15A	-	SMBJ-LC15A	TVS	Vbr=17.5..19.3V, Vrwm=15V, 24.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
C15A	-	SMCG15A	TVS	Vrwm=15V, 61.5A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C15A	-	SMCJ15A	TVS	Vrwm=15V, Vbr=16.7..19.2V, 61.5A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C15C	-	1.5SCMJ27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C15C	-	1.5SMC15CA	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, Ipp=71A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C15C	-	P6SMB15CA	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C15C	-	SMCG15C	TVS	Vrwm=15V, 55.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C15CA	-	SMCG15CA	TVS	Vrwm=15V, 61.5A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C15CA	-	SMCJ15CA	TVS	Vrwm=15V, Vbr=16.7..19.2V, 61.5A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C16	-	BZG03-C16	Zener diode	16V±5%, Izt=25mA, Zzt=6Ω, 1.25W	DO-214AC	1d	1a	Eic
C16	-	SMA5C16	Zener diode	16V±5%, Izt=15mA, Zzt<15Ω, 3W	DO-214AC	1d	1a	Mco
C16	-	SMBJ-LC16	TVS	Vbr=18.6..22.6V, Vrwm=16V, 20.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
C16	-	SMCG16	TVS	Vrwm=16V, 52.1A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C160	-	BZG03-C160	Zener diode	160V±5%, Izt=5mA, Zzt=150Ω, 1.25W	DO-214AC	1d	1a	Eic
C160	-	SMBJ-LC160	TVS	Vbr=178.8..218.8V, Vrwm=160V, 2.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
C160	-	SMCG160	TVS	Vrwm=160V, 5.2A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C160A	-	1.5SMC160A	TVS	Vrwm=136V, Vbr=152..168V, Ipp=6.8A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C160A	-	P6SMB160A	TVS	Vrwm=160V, Vbr=152..168V, 2.7A, 600W(1ms)	DO-214AA	1d	1a	Cen
C160A	-	SMBJ-LC160A	TVS	Vbr=178.8..197.8V, Vrwm=160V, 2.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
C160A	-	SMCG160A	TVS	Vrwm=160V, 5.8A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C160A	-	SMCJ160A	TVS	Vrwm=160V, Vbr=178..205V, 5.8A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C160C	-	1.5SMC160CA	TVS	Vrwm=136V, Vbr=152..168V, Ipp=6.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C160C	-	P6SMB160CA	TVS	Vrwm=160V, Vbr=152..168V, 2.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C160C	-	SMCG160C	TVS	Vrwm=160V, 5.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C160CA	-	SMCG160CA	TVS	Vrwm=160V, 5.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C160CA	-	SMCJ160CA	TVS	Vrwm=160V, Vbr=178..205V, 5.8A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C16A	-	1.5SCMJ30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C16A	-	1.5SMC16A	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, Ipp=67A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C16A	-	P6SMB16A	TVS	Vrwm=16V, Vbr=15.2..16.8V, 26.7A, 600W(1ms)	DO-214AA	1d	1a	Cen
C16A	-	SMBJ-LC16A	TVS	Vbr=18.6..20.5V, Vrwm=16V, 23.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
C16A	-	SMCG16A	TVS	Vrwm=16V, 57.7A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C16A	-	SMCJ16A	TVS	Vrwm=16V, Vbr=17.8..20.5V, 57.7A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C16C	-	1.5SCMJ30CA	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C16C	-	1.5SMC16CA	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, Ipp=67A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C16C	-	P6SMB16CA	TVS	Vrwm=16V, Vbr=15.2..16.8V, 26.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C16C	-	SMCG16C	TVS	Vrwm=16V, 52.1A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C16CA	-	SMCG16CA	TVS	Vrwm=16V, 57.7A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
C16CA	-	SMCJ16CA	TVS	Vrwm=16V, Vbr=17.8..20.5V, 57.7A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C17	-	SMBJ-LC17	TVS	Vbr=19.7..23.9V, Vrwm=17V, 19.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
C17	-	SMCG17	TVS	Vrwm=17V, 49.2A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C170	-	SMBJ-LC170	TVS	Vbr=189.8..231.8V, Vrwm=170V, 2.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
C170	-	SMCG170	TVS	Vrwm=170V, 4.9A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C170A	-	1.5SMC170A	TVS	Vrwm=145V, Vbr=162..179V, Ipp=6.4A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C170A	-	P6SMB170A	TVS	Vrwm=170V, Vbr=162..179V, 2.6A, 600W(1ms)	DO-214AA	1d	1a	Cen
C170A	-	SMBJ-LC170A	TVS	Vbr=189.8..209.8V, Vrwm=170V, 2.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
C170A	-	SMCG170A	TVS	Vrwm=170V, 5.5A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C170A	-	SMCJ170A	TVS	Vrwm=170V, Vbr=189..217V, 5.5A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C170C	-	1.5SMC170CA	TVS	Vrwm=145V, Vbr=162..179V, Ipp=6.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C170C	-	P6SMB170CA	TVS	Vrwm=170V, Vbr=162..179V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C170C	-	SMCG170C	TVS	Vrwm=170V, 4.9A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C170CA	-	SMCG170CA	TVS	Vrwm=170V, 5.5A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C170CA	-	SMCJ170CA	TVS	Vrwm=170V, Vbr=189..217V, 5.5A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C17A	-	1.5SCMJ33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C17A	-	SMBJ-LC17A	TVS	Vbr=19.7..21.7V, Vrwm=17V, 21.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
C17A	-	SMCG17A	TVS	Vrwm=17V, 54.3A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C17A	-	SMCJ17A	TVS	Vrwm=17V, Vbr=18.9..21.7V, 53.3A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C17C	-	1.5SCMJ33CA	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C17C	-	SMCG17C	TVS	Vrwm=17V, 49.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C17CA	-	SMCG17CA	TVS	Vrwm=17V, 54.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C17CA	-	SMCJ17CA	TVS	Vrwm=17V, Vbr=18.9..21.7V, 53.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C18	-	BZG03-C18	Zener diode	18V±5%, Izt=25mA, Zzt=6Ω, 1.25W	DO-214AC	1d	1a	Eic
C18	-	SMA5C18	Zener diode	18V±5%, Izt=15mA, Zzt<20Ω, 3W	DO-214AC	1d	1a	Mco
C18	-	SMBJ-LC18	TVS	Vbr=20.8..25.2V, Vrwm=18V, 18.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
C18	-	SMCG18	TVS	Vrwm=18V, 46.6A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C180	-	BZG03-C180	Zener diode	180V±5%, Izt=5mA, Zzt=180Ω, 1.25W	DO-214AC	1d	1a	Eic
C180A	-	1.5SMC180A	TVS	Vrwm=154V, Vbr=171..189V, Ipp=6.1A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C180A	-	P6SMB180A	TVS	Vrwm=180V, Vbr=171 189V, 2.4A, 600W(1ms)	DO-214AA	1d	1a	Cen
C180C	-	1.5SMC180CA	TVS	Vrwm=154V, Vbr=171..189V, Ipp=6.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C180C	-	P6SMB180CA	TVS	Vrwm=180V, Vbr=171 189V, 2.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C188	-	SMBJ-LC188	TVS	Vbr=209.8..255.8V, Vrwm=188V, 1.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
C188A	-	SMBJ-LC188A	TVS	Vbr=209.8..231.8V, Vrwm=188V, 2.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
C18A	-	1.5SCMJ36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C18A	-	1.5SMC18A	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, Ipp=59.5A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C18A	-	P6SMB18A	TVS	Vrwm=18V, Vbr=17.1..18.9V, 23.8A, 600W(1ms)	DO-214AA	1d	1a	Cen
C18A	-	SMBJ-LC18A	TVS	Vbr=20.8..22.9V, Vrwm=18V, 20.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
C18A	-	SMCG18A	TVS	Vrwm=18V, 51.4A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C18A	-	SMCJ18A	TVS	Vrwm=18V, Vbr=20..23.3V, 51.4A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C18C	-	1.5SCMJ36CA	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C18C	-	1.5SMC18CA	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, Ipp=59.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C18C	-	P6SMB18CA	TVS	Vrwm=18V, Vbr=17.1..18.9V, 23.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C18C	-	SMCG18C	TVS	Vrwm=18V, 46.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C18CA	-	SMCG18CA	TVS	Vrwm=18V, 51.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C18CA	-	SMCJ18CA	TVS	Vrwm=18V, Vbr=20..23.3V, 51.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C19A	-	1.5SCMJ39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C19C	-	1.5SCMJ39CA	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C1A	-	1.5SCMJ6.8A	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 40A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C1C	-	1.5SCMJ6.8CA	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 40A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C2	-	BZT52H-C51	Zener diode	51.0V±5%, Izt=5mA, Zzt=100Ω, 375mW	SOD-123FL	7d	1a	Phi
C2	-	BZX384B2V7-V-G	Zener diode	2.7V±2.5%, Izt=5mA, Zzt=75Ω, 200mW	SOD-323	5d	2m	Vs
C2	-	BZX585-B2V9	Zener diode	2.9V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
C2	-	CZRH5222B-G	Zener diode	2.38..2.63V, Zzt=30Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
C2	-	CZRV5222B-G	Zener diode	2.38..2.63V, Zzt=30Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
C2	-	EDZ5.6B	Zener diode	5.49..5.73V, Izt=5mA, Zzt=60Ω, 150mW	SOD-523	6d	1a	Rhm
C2	-	EDZV5.6B	Zener diode	5.49..5.73V, Izt=5.0mA, Zzt=60Ω, 150mW	SOD-523	6d	2v	Rhm
C2	-	FDZ5.6EV	Zener diode	5.490..5.730V, Izt=5mA, Zzt=60Ω, 150mW	SOD-523	6d	1a	Fis
C2	-	FDZ5.6VT	Zener diode	5.490..5.730V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	1a	Fis
C2	-	FSS33	Si-diode	SBR, 30V, 3A, Vf<0.75V(3A)	DO-214AB	1d	2j	Fag
C2	-	LBZT52B5V6T1G	Zener diode	5.49..5.73V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
C2	-	LEDZ5.6BT1G	Zener diode	5.49..5.73V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
C2	-	LMSZ5222BT1G	Zener diode	2.38..2.63V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
C2	-	LUDZS5.6BT1G	Zener diode	5.49..5.73V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
C2	-	MAZF047	Zener diode	4.4..5V, Zzt=80Ω(5mA), 120mW	S-Mini	8d	1a	Pan
C2	-	MAZN047	Zener diode	4.4..5V, Zzt=80Ω(5mA), 120mW	SSMini2	7d	1a	Pan
C2	-	MM3Z5222B	Zener diode	2.38..2.63V, Izt=20mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Ext
C2	-	MM3Z5243B	Zener diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 200mW	SOD-323FL	7d	1a	Bts
C2	-	MM3Z5243BH	Zener diode	12.35..13.65V, Izt=9.5mA, Zzt=13Ω, 300mW	SOD-323	5d	1a	Zow
C2	-	MMBZ5222BV	Zener diode	2.5V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-523	6d	1a	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
C2	-	MMSZ5222BWS	Zener diode	2.38..2.63V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
C2	-	MSCD032	Si-diode	SBR, 20V, 0.3A, Vf<0.5V(0.3A)	0805	14d	1v	Zow
C2	-	RKZ2.2BKK	Zener diode	2.10..2.40V, Izt=5mA, Zzt=100Ω, 150mW	SFP	7d	1a	Ren
C2	-	RKZ2.2BKL	Zener diode	2.10..2.40V, Izt=5mA, Zzt=100Ω, 100mW	EFP	7d	1a	Ren
C2	-	SMBYT03-200	Si-diode	Rectifier, Fast-Recovery, 200V, 3A, Vf<0.71V(3A), <25ns	DO-214AC	1d	1q	Ste
C2	-	TDZ5.6B	Zener diode	5.6V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
C2	-	UDZS5.6B	Zener diode	5.49..5.73V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	1a	Wtr
C2	-	UDZS5.6B	Zener diode	5.6V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
C2	-	UDZV5.6B	Zener diode	5.49..5.73V, Izt=5.0mA, Zzt=60Ω, 200mW	SOD-323	5d	2v	Rhm
C2	-	VDZS5.6B	Zener diode	5.6V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
C20	-	BZG03-C20	Zener diode	20V±5%, Izt=25mA, Zzt=6Ω, 1.25W	DO-214AC	1d	1a	Eic
C20	-	SMA5C20	Zener diode	20V±5%, Izt=10mA, Zzt<24Ω, 3W	DO-214AC	1d	1a	Mco
C20	-	SMBJ-LC20	TVS	Vbr=23.0..27.9V, Vrwm=20V, 16.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
C20	-	SMCG20	TVS	Vrwm=20V, 41.9A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C200	-	BZG03-C200	Zener diode	200V±5%, Izt=5mA, Zzt=200Ω, 1.25W	DO-214AC	1d	1a	Eic
C200A	-	1.5SMC200A	TVS	Vrwm=171V, Vbr=190..210V, Ipp=5.5A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C200A	-	P6SMB200A	TVS	Vrwm=200V, Vbr=190..210V, 2.2A, 600W(1ms)	DO-214AA	1d	1a	Cen
C200C	-	1.5SMC200CA	TVS	Vrwm=171V, Vbr=190..210V, Ipp=5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C200C	-	P6SMB200CA	TVS	Vrwm=200V, Vbr=190..210V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C202	-	CMR2-02	Si-diode	GP, Rectifer, 200V, 2A, Vf<1.1V(2A)	DO-214AA	1d	1a	Cen
C204	-	CMR2-04	Si-diode	GP, Rectifer, 400V, 2A, Vf<1.1V(2A)	DO-214AA	1d	1a	Cen
C206	-	CMR2-06	Si-diode	GP, Rectifer, 600V, 2A, Vf<1.1V(2A)	DO-214AA	1d	1a	Cen
C20A	-	1.5SCMJ43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C20A	-	1.5SMC20A	TVS	Vrwm=17.1V, Vbr=19..21V, Ipp=54A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C20A	-	P6SMB20A	TVS	Vrwm=20V, Vbr=19..21.0V, 21.7A, 600W(1ms)	DO-214AA	1d	1a	Cen
C20A	-	SMBJ-LC20A	TVS	Vbr=23.0..25.3V, Vrwm=20V, 18.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
C20A	-	SMCG20A	TVS	Vrwm=20V, 46.3A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C20A	-	SMCJ20A	TVS	Vrwm=20V, Vbr=22.2..25.5V, 46.3A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C20C	-	1.5SCMJ43CA	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C20C	-	1.5SMC20CA	TVS	Vrwm=17.1V, Vbr=19..21V, Ipp=54A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C20C	-	P6SMB20CA	TVS	Vrwm=20V, Vbr=19..21.0V, 21.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C20C	-	SMCG20C	TVS	Vrwm=20V, 41.9A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C20CA	-	SMCG20CA	TVS	Vrwm=20V, 46.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C20CA	-	SMCJ20CA	TVS	Vrwm=20V, Vbr=22.2..25.5V, 46.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C210	-	CMR2-10	Si-diode	GP, Rectifer, 1000V, 2A, Vf<1.1V(2A)	DO-214AA	1d	1a	Cen
C21A	-	1.5SCMJ47A	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 5.0A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C21C	-	1.5SCMJ47CA	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 5.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C22	-	BZG03-C22	Zener diode	22V±5%, Izt=25mA, Zzt=6Ω, 1.25W	DO-214AC	1d	1a	Eic
C22	-	SMA5C22	Zener diode	22V±5%, Izt=10mA, Zzt<25Ω, 3W	DO-214AC	1d	1a	Mco
C22	-	SMBJ-LC22	TVS	Vbr=25.2..30.6V, Vrwm=22V, 15.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
C22	-	SMCG22	TVS	Vrwm=22V, 38.1A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C220	-	BZG03-C220	Zener diode	220V±5%, Izt=2mA, Zzt=350Ω, 1.25W	DO-214AC	1d	1a	Eic
C220A	-	1.5SMC220A	TVS	Vrwm=185V, Vbr=209..231V, Ipp=4.6A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C220A	-	P6SMB220A	TVS	Vrwm=220V, Vbr=209..231V, 1.83A, 600W(1ms)	DO-214AA	1d	1a	Cen
C220C	-	1.5SMC220CA	TVS	Vrwm=175V, Vbr=198..242V, Ipp=4.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C220C	-	P6SMB220CA	TVS	Vrwm=220V, Vbr=209..231V, 1.83A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C22A	-	1.5SCMJ51A	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C22A	-	1.5SMC22A	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, Ipp=49A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C22A	-	P6SMB22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 20.0A, 600W(1ms)	DO-214AA	1d	1a	Cen
C22A	-	SMBJ-LC22A	TVS	Vbr=25.2..27.7V, Vrwm=22V, 16.9A, 600W(1ms)	DO-214AA	1d	1a	Eic
C22A	-	SMCG22A	TVS	Vrwm=22V, 42.3A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C22A	-	SMCJ22A	TVS	Vrwm=22V, Vbr=24.4..28V, 42.2A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C22C	-	1.5SCMJ51CA	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C22C	-	1.5SMC22CA	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, Ipp=49A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C22C	-	P6SMB22CA	TVS	Vrwm=22V, Vbr=20.9..23.1V, 19.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C22C	-	SMCG22C	TVS	Vrwm=22V, 38.1A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C22CA	-	SMCG22CA	TVS	Vrwm=22V, 42.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C22CA	-	SMCJ22CA	TVS	Vrwm=22V, Vbr=24.4..28V, 42.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C23A	-	1.5SCMJ56A	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C23C	-	1.5SCMJ56CA	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C24	-	BZG03-C24	Zener diode	24V±5%, Izt=25mA, Zzt=7Ω, 1.25W	DO-214AC	1d	1a	Eic
C24	-	CMDD2004	Si-diode	Sw, 240V, 200mA, 250mW, Vf<1V(100mA), <5pF	SOD-323	5d	1a	Cen
C24	-	SMA5C24	Zener diode	24V±5%, Izt=10mA, Zzt<25Ω, 3W	DO-214AC	1d	1a	Mco
C24	-	SMBJ-LC24	TVS	Vbr=27.5..33.4V, Vrwm=24V, 14.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
C24	-	SMCG24	TVS	Vrwm=24V, 34.9A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C240	-	BZG03-C240	Zener diode	270V±5%, Izt=2mA, Zzt=400Ω, 1.25W	DO-214AC	1d	1a	Eic
C24A	-	1.5SCMJ62A	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C24A	-	1.5SMC24A	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, Ipp=45A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C24A	-	P6SMB24A	TVS	Vrwm=24V, Vbr=22.8..25.2V, 18.1A, 600W(1ms)	DO-214AA	1d	1a	Cen
C24A	-	SMBJ-LC24A	TVS	Vbr=27.5..30.3V, Vrwm=24V, 15.4A, 600W(1ms)	DO-214AA	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
C24A	-	SMCG24A	TVS	Vrwm=24V, 38.6A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C24A	-	SMCJ24A	TVS	Vrwm=24V, Vbr=26.7..30.7V, 38.6A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C24C	-	1.5SCMJ62CA	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C24C	-	1.5SMC24CA	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, Ipp=45A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C24C	-	P6SMB24CA	TVS	Vrwm=24V, Vbr=22.8..25.2V, 18.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C24C	-	SMCG24C	TVS	Vrwm=24V, 34.9A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C24CA	-	SMCG24CA	TVS	Vrwm=24V, 38.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C24CA	-	SMCJ24CA	TVS	Vrwm=24V, Vbr=26.7..30.7V, 38.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C250A	-	P6SMB250A	TVS	Vbr=237..263V, Vrwm=214V, 1.75A, 600W(1ms)	DO-214AA	1d	1a	Cen
C250C	-	P6SMB250CA	TVS	Vbr=237..263V, Vrwm=214V, 1.75A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C25A	-	1.5SCMJ68A	TVS	Vbr=64.6..71.4V, Vrwm=58.0V, 4.6A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C25C	-	1.5SCMJ68CA	TVS	Vbr=64.6..71.4V, Vrwm=58.0V, 4.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C26	-	SMBJ-LC26	TVS	Vbr=29.7..36.1V, Vrwm=26V, 12.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
C26	-	SMCG26	TVS	Vrwm=26V, 32.2A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C26A	-	1.5SCMJ75A	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C26A	-	SMBJ-LC26A	TVS	Vbr=29.7..32.7V, Vrwm=26V, 14.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
C26A	-	SMCG26A	TVS	Vrwm=26V, 35.6A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C26A	-	SMCJ26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, 35.6A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C26C	-	1.5SCMJ75CA	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C26C	-	SMCG26C	TVS	Vrwm=26V, 32.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C26CA	-	SMCG26CA	TVS	Vrwm=26V, 35.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C26CA	-	SMCJ26CA	TVS	Vrwm=26V, Vbr=28.9..33.2V, 35.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C27	-	BZG03-C27	Zener diode	27V±5%, Izt=25mA, Zzt=7Ω, 1.25W	DO-214AC	1d	1a	Eic
C27	-	SMA5C27	Zener diode	27V±5%, Izt=8mA, Zzt<30Ω, 3W	DO-214AC	1d	1a	Mco
C270	-	BZG03-C270	Zener diode	270V±5%, Izt=2mA, Zzt=450Ω, 1.25W	DO-214AC	1d	1a	Eic
C27A	-	1.5SCMJ82A	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C27A	-	1.5SMC27A	TVS	Vrwm=23.1V, Vbr=25.7..28.4 V, Ipp=40A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C27A	-	P6SMB27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.0A, 600W(1ms)	DO-214AA	1d	1a	Cen
C27C	-	1.5SCMJ82CA	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C27C	-	1.5SMC27CA	TVS	Vrwm=23.1V, Vbr=25.7..28.4 V, Ipp=40A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C27C	-	P6SMB27CA	TVS	Vrwm=27V, Vbr=25.7..28.4V, 16A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C28	-	SMBJ-LC28	TVS	Vbr=31.9..38.8V, Vrwm=28V, 12.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
C28	-	SMCG28	TVS	Vrwm=28V, 30A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C28A	-	1.5SCMJ91A	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C28A	-	SMBJ-LC28A	TVS	Vbr=31.9..35.2V, Vrwm=28V, 13.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
C28A	-	SMCG28A	TVS	Vrwm=28V, 33A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C28A	-	SMCJ28A	TVS	Vrwm=28V, Vbr=31.1..35.8V, 33A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C28C	-	1.5SCMJ91CA	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C28C	-	SMCG28C	TVS	Vrwm=28V, 30A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C28CA	-	SMCG28CA	TVS	Vrwm=28V, 33A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C28CA	-	SMCJ28CA	TVS	Vrwm=28V, Vbr=31.1..35.8V, 33A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C29A	-	1.5SCMJ100A	TVS	Vbr=95..105V, Vrwm=85.5V, 3.1A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C29C	-	1.5SCMJ100CA	TVS	Vbr=95..105V, Vrwm=85.5V, 3.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C2A	-	1.5SCMJ7.5A	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 37A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C2C	-	1.5SCMJ7.5CA	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 37A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C2L	-	CMHSH5-2L	Si-diode	HS, Sw, 20V, 500mA, Vf<0.38V(500mA), 60pF	SOD-123	5d	1a	Cen
C3	-	BZT52H-C56	Zener diode	56.0V±5%, Izt=2mA, Zzt=120Ω, 375mW	SOD-123FL	7d	1a	Phi
C3	-	BZX384B3V0-V-G	Zener diode	3.0V±2.5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	2m	Vs
C3	-	BZX585-B3V0	Zener diode	3.0V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
C3	-	CZRH5223B-G	Zener diode	2.57..2.84V, Zzt=30Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
C3	-	CZRV5223B-G	Zener diode	2.57..2.84V, Zzt=30Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
C3	-	CZRW5223B-G	Zener diode	2.57..2.84V, Zzt=30Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
C3	-	FSS34	Si-diode	SBR, 40V, 3A, Vf<0.75V(3A)	DO-214AB	1d	2j	Fag
C3	-	LMSZ5223BT1G	Zener diode	2.57..2.84V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
C3	-	MM3Z5223B	Zener diode	2.57..2.84V, Izt=20mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Ext
C3	-	MM3Z5265B	Zener diode	62V±5%, Izt=2.0mA, Zzt=185Ω, 200mW	SOD-323FL	7d	1a	Bts
C3	-	MM3Z5265BH	Zener diode	58.9..65.1V, Izt=2mA, Zzt=185Ω, 300mW	SOD-323	5d	1a	Zow
C3	-	MMBZ5223BV	Zener diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-523	6d	1a	Pjt
C3	-	MMSZ5223B	Zener diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123	5d	1d	Di
C3	-	MMSZ5223BS	Zener diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-323	5d	1d	Di
C3	-	MMSZ5223BWS	Zener diode	2.57..2.84V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
C3	-	OYD2V7T1	Zener diode	2.5...2.9V, Izt=5mA, Zzt=110Ω, 500mW	SOD-123	5d	1a	Ouy
C3	-	RKZ2.4BKK	Zener diode	2.30..2.60V, Izt=5mA, Zzt=100Ω, 150mW	SFP	7d	1a	Ren
C3	-	RKZ2.4BKL	Zener diode	2.30..2.60V, Izt=5mA, Zzt=100Ω, 100mW	EFP	7d	1a	Ren
C3	-	SMBYT03-300	Si-diode	Rectifier, Fast-Recovery, 300V, 3A, Vf<0.85V(3A), <25ns	DO-214AC	1d	1q	Ste
C3	ag	MMSZ5223B	Zener diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123	5d	1d	Di
C30	-	BZG03-C30	Zener diode	30V±5%, Izt=25mA, Zzt=8Ω, 1.25W	DO-214AC	1d	1a	Eic
C30	-	SMA5C30	Zener diode	30V±5%, Izt=8mA, Zzt<30Ω, 3W	DO-214AC	1d	1a	Mco
C30	-	SMBJ-LC30	TVS	Vbr=34.1..41.5V, Vrwm=30V, 11.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
C30	-	SMCG30	TVS	Vrwm=30V, 28A, 1500W(1ms)	DO-215AB	5d	1b	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
C302	-	CMR3-02	Si-diode	GP, Rectifer, 200V, 3A, Vf<1.2V(3A)	DO-214AB	1d	1a	Cen
C304	-	CMR3-04	Si-diode	GP, Rectifer, 400V, 3A, Vf<1.2V(3A)	DO-214AB	1d	1a	Cen
C306	-	CMR3-06	Si-diode	GP, Rectifer, 600V, 3A, Vf<1.2V(3A)	DO-214AB	1d	1a	Cen
C30A	-	1.5SCMJ110A	TVS	Vbr=105..116V, Vrwm=94V, 2.8A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C30A	-	1.5SMC30A	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, Ipp=36A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C30A	-	P6SMB30A	TVS	Vrwm=30V, Vbr=28.5..31.5V, 14.5A, 600W(1ms)	DO-214AA	1d	1a	Cen
C30A	-	SMBJ-LC30A	TVS	Vbr=34.1..37.6V, Vrwm=30V, 12.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
C30A	-	SMCG30A	TVS	Vrwm=30V, 31A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C30A	-	SMCJ30A	TVS	Vrwm=30V, Vbr=33.3..38.3V, Vcl=48.4V, 31A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C30C	-	1.5SCMJ110CA	TVS	Vbr=105..116V, Vrwm=94V, 2.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C30C	-	1.5SMC30CA	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, Ipp=36A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C30C	-	P6SMB30CA	TVS	Vrwm=30V, Vbr=28.5..31.5V, 14.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C30C	-	SMCG30C	TVS	Vrwm=30V, 28A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C30CA	-	SMCG30CA	TVS	Vrwm=30V, 31A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C30CA	-	SMCJ30CA	TVS	Vrwm=30V, Vbr=33.3..38.3V, 31A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C310	-	CMR3-10	Si-diode	GP, Rectifer, 1000V, 3A, Vf<1.2V(3A)	DO-214AB	1d	1a	Cen
C310	-	SCM310PT	Si-diode	SBR, 100V, 3A, Vf<0.8V(3A)	DO-214AB	1d	1a	Chm
C31A	-	1.5SCMJ120A	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C31C	-	1.5SCMJ120CA	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C32A	-	1.5SCMJ130A	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C32C	-	1.5SCMJ130CA	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C33	-	BZG03-C33	Zener diode	33V±5%, Izt=25mA, Zzt=8Ω, 1.25W	DO-214AC	1d	1a	Eic
C33	-	SMA5C33	Zener diode	33V±5%, Izt=8mA, Zzt<35Ω, 3W	DO-214AC	1d	1a	Mco
C33	-	SMBJ-LC33	TVS	Vbr=37.5..45.7V, Vrwm=33V, 10.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
C33	-	SMCG33	TVS	Vrwm=33V, 25.4A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C33A	-	1.5SCMJ150A	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C33A	-	1.5SMC33A	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, Ipp=33A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C33A	-	P6SMB33A	TVS	Vbr=31.4..34.7V, 13.2A, 600W(1ms)	DO-214AA	1d	1a	Cen
C33A	-	SMBJ-LC33A	TVS	Vbr=37.5..41.4V, Vrwm=33V, 11.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
C33A	-	SMCG33A	TVS	Vrwm=33V, 28.1A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C33A	-	SMCJ33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, 28.1A, 1500W(1ms)	DO-214AB	1d	1a	Msc
C33C	-	1.5SCMJ150CA	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C33C	-	1.5SMC33CA	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, Ipp=33A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C33C	-	P6SMB33CA	TVS	Vrwm=33V, Vbr=31.4..34.7V, 131A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C33C	-	SMCG33C	TVS	Vrwm=33V, 25.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C33CA	-	SMCG33CA	TVS	Vrwm=33V, 28.1A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C33CA	-	SMCJ33CA	TVS	Vrwm=33V, Vbr=36.7..40.6V, 28.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
C34A	-	1.5SCMJ160A	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C34C	-	1.5SCMJ160CA	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C34H	-	SCM34LHPT	Si-diode	SBR, 40V, 3A, Vf<0.48V(3A)	DO-214AB	1d	1a	Chm
C34L	-	SCM34LPT	Si-diode	SBR, 40V, 3A, Vf<0.42V(3A)	DO-214AB	1d	1a	Chm
C35A	-	1.5SCMJ170A	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C35C	-	1.5SCMJ170CA	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C36	-	BZG03-C36	Zener diode	36V±5%, Izt=10mA, Zzt=21Ω, 1.25W	DO-214AC	1d	1a	Eic
C36	-	SMA5C36	Zener diode	36V±5%, Izt=8mA, Zzt<40Ω, 3W	DO-214AC	1d	1a	Mco
C36	-	SMBJ-LC36	TVS	Vbr=40.8..49.7V, Vrwm=36V, 9.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
C36	-	SMCG36	TVS	Vrwm=36V, 23.3A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C36A	-	1.5SCMJ180A	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C36A	-	1.5SMC36A	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, Ipp=30A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C36A	-	P6SMB36A	TVS	Vrwm=36V, Vbr=34.2..37.8V, 12A, 600W(1ms)	DO-214AA	1d	1a	Cen
C36A	-	SMBJ-LC36A	TVS	Vbr=40.8..45.0V, Vrwm=36V, 10.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
C36A	-	SMCG36A	TVS	Vrwm=36V, 25.8A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C36A	-	SMCJ36A	TVS	Vrwm=36V, Vbr= 40..46V, 25.8A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C36C	-	1.5SCMJ180CA	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C36C	-	1.5SMC36CA	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, Ipp=30A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C36C	-	P6SMB36CA	TVS	Vrwm=36V, Vbr=34.2..37.8V, 12A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C36C	-	SMCG36C	TVS	Vrwm=36V, 23.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C36CA	-	SMCG36CA	TVS	Vrwm=36V, 25.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C36CA	-	SMCJ36CA	TVS	Vrwm=36V, Vbr= 40..46V, 25.8A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C37A	-	1.5SCMJ200A	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C37C	-	1.5SCMJ200CA	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C39	-	BZG03-C39	Zener diode	39V±5%, Izt=10mA, Zzt=21Ω, 1.25W	DO-214AC	1d	1a	Eic
C39	-	SMA5C39	Zener diode	39V±5%, Izt=6mA, Zzt<50Ω, 3W	DO-214AC	1d	1a	Mco
C39A	-	1.5SMC39A	TVS	Vrwm=33.3V, Vbr=37.1..41V, Ipp=28A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C39A	-	P6SMB39A	TVS	Vrwm=39V, Vbr=37.1..41V, 11.1A, 600W(1ms)	DO-214AA	1d	1a	Cen
C39C	-	1.5SMC39CA	TVS	Vrwm=33.3V, Vbr=37.1..41V, Ipp=28A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C39C	-	P6SMB39CA	TVS	Vrwm=39V, Vbr=37.1..41V, 11.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C3A	-	1.5SCMJ8.2A	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 35A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C3C	-	1.5SCMJ8.2CA	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 35A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C3V3	-	SMA5C3V3	Zener diode	3.3V±5%, Izt=80mA, Zzt<20Ω, 3W	DO-214AC	1d	1a	Mco

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
C3V6	-	SMA5C3V6	Zener diode	3.6V±5%, Izt=60mA, Zzt<20Ω, 3W	DO-214AC	1d	1a	Mco
C3V9	-	SMA5C3V9	Zener diode	3.9V±5%, Izt=60mA, Zzt<15Ω, 3W	DO-214AC	1d	1a	Mco
C4	-	BZT52H-C62	Zener diode	62.0V±5%, Izt=2mA, Zzt=140Ω, 375mW	SOD-123FL	7d	1a	Phi
C4	-	BZX384B3V3-V-G	Zener diode	3.3V±2.5%, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	2m	Vs
C4	-	BZX585-B3V3	Zener diode	3.3V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
C4	-	FSS35	Si-diode	SBR, 50V, 3A, Vf<0.75V(3A)	DO-214AB	1d	2j	Fag
C4	-	LMSZ5224BT1G	Zener diode	2.66..2.94V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
C4	-	MM1Z5225B	Zener diode	2.85..3.15V, Izt=20mA, Zzt=29Ω, 500mW	SOD-323FL	7d	1a	Eic
C4	-	MM1Z5225BH	Zener diode	2.85..3.15V, Izt=20mA, Zzt=29Ω, 500mW	SOD-123	5d	1a	Zow
C4	-	MMSZ5225B	Zener diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 500mW	SOD-123	5d	1a	Eic
C4	-	MSCD034	Si-diode	SBR, 40V, 0.3A, Vf<0.5V(0.3A)	0805	14d	1v	Zow
C4	-	SMBYT03-400	Si-diode	Rectifier, Fast-Recovery, 200V, 3A, Vf<0.71V(3A), <25ns	DO-214AC	1d	1q	Ste
C40	-	SMBJ-LC40	TVS	Vbr=45.2..55.1V, Vrwm=40V, 8.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
C40	-	SMCG40	TVS	Vrwm=40V, 21A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C40A	-	SMBJ-LC40A	TVS	Vbr=45.2..49.9V, Vrwm=40V, 9.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
C40A	-	SMCG40A	TVS	Vrwm=40V, 23.3A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C40A	-	SMCJ40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, 23.2A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C40C	-	SMCG40C	TVS	Vrwm=40V, 21A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C40CA	-	SMCG40CA	TVS	Vrwm=40V, 23.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C40CA	-	SMCJ40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, 23.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C43	-	BZG03-C43	Zener diode	43V±5%, Izt=10mA, Zzt=24Ω, 1.25W	DO-214AC	1d	1a	Eic
C43	-	SMBJ-LC43	TVS	Vbr=48.6..59.2V, Vrwm=43V, 7.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
C43	-	SMCG43	TVS	Vrwm=43V, 19.6A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C43A	-	1.5SMC43A	TVS	Vrwm=36.8V, Vbr=40.9..45.2V, Ipp=25.3A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C43A	-	P6SMB43A	TVS	Vrwm=43V, Vbr=40.9..45.2V, 10.1A, 600W(1ms)	DO-214AA	1d	1a	Cen
C43A	-	SMBJ-LC43A	TVS	Vbr=48.6..53.6V, Vrwm=43V, 8.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
C43A	-	SMCG43A	TVS	Vrwm=43V, 21.6A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C43A	-	SMCJ43A	TVS	Vrwm=43V, Vbr=47.8..54.9V, 21.6A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C43C	-	1.5SMC43CA	TVS	Vrwm=36.8V, Vbr=40.9..45.2V, Ipp=25.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C43C	-	P6SMB43CA	TVS	Vrwm=43V, Vbr=40.9..45.2V, 10.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C43C	-	SMCG43C	TVS	Vrwm=43V, 19.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C43CA	-	SMCG43CA	TVS	Vrwm=43V, 21.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C43CA	-	SMCJ43CA	TVS	Vrwm=43V, Vbr=47.8..54.9V, 21.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C45	-	SMBJ-LC45	TVS	Vbr=50.8..61.9V, Vrwm=45V, 7.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
C45	-	SMCG45	TVS	Vrwm=45V, 18.7A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C45A	-	SMBJ-LC45A	TVS	Vbr=50.8..56.1V, Vrwm=45V, 8.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
C45A	-	SMCG45A	TVS	Vrwm=45V, 20.6A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C45A	-	SMCJ45A	TVS	Vrwm=45V, Vbr=50..57.5V, 20.6A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C45C	-	SMCG45C	TVS	Vrwm=45V, 18.7A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C45CA	-	SMCG45CA	TVS	Vrwm=45V, 20.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C45CA	-	SMCJ45CA	TVS	Vrwm=45V, Vbr=50..57.5V, 20.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C47	-	BZG03-C47	Zener diode	47V±5%, Izt=10mA, Zzt=24Ω, 1.25W	DO-214AC	1d	1a	Eic
C47A	-	1.5SMC47A	TVS	Vrwm=40.2V, Vbr=44.7..49.4V, Ipp=23.2A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C47A	-	P6SMB47A	TVS	Vrwm=47V, Vbr=44.7..49.4V, 9.3A, 600W(1ms)	DO-214AA	1d	1a	Cen
C47C	-	1.5SMC47CA	TVS	Vrwm=40.2V, Vbr=44.7..49.4V, Ipp=23.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C47C	-	P6SMB47CA	TVS	Vrwm=47V, Vbr=44.7..49.4V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C48	-	CMHD4448	Si-diode	HS, Sw, 75V, 250mA, 400mW, Vf<1V(100mA), <4pF	SOD-123	5d	1a	Cen
C48	-	SMBJ-LC48	TVS	Vbr=54.1..65.9V, Vrwm=48V, 7.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
C48	-	SMCG48	TVS	Vrwm=48V, 17.5A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C48A	-	SMBJ-LC48A	TVS	Vbr=54.1..59.7V, Vrwm=48V, 7.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
C48A	-	SMCG48A	TVS	Vrwm=48V, 19.4A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C48A	-	SMCJ48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, 19.4A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C48C	-	SMCG48C	TVS	Vrwm=48V, 17.5A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C48CA	-	SMCG48CA	TVS	Vrwm=48V, 19.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C48CA	-	SMCJ48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, 19.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C4A	-	1.5SCMJ9.1A	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 31A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C4C	-	1.5SCMJ9.1CA	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 31A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C4V3	-	SMA5C4V3	Zener diode	4.3V±5%, Izt=50mA, Zzt<13Ω, 3W	DO-214AC	1d	1a	Mco
C4V7	-	SMA5C4V7	Zener diode	4.7V±5%, Izt=45mA, Zzt<13Ω, 3W	DO-214AC	1d	1a	Mco
C5	-	BZT52H-C68	Zener diode	68.0V±5%, Izt=2mA, Zzt=160Ω, 375mW	SOD-123FL	7d	1a	Phi
C5	-	BZX384B3V6-V-G	Zener diode	3.6V±2.5%, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	2m	Vs
C5	-	BZX584B7V5	Zener diode	7.35..7.65V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523FL	7d	1a	Tac
C5	-	BZX585-B3V6	Zener diode	3.6V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
C5	-	CZRH5225B-G	Zener diode	2.85..3.15V, Zzt=30Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
C5	-	CZRV5225B-G	Zener diode	2.85..3.15V, Zzt=30Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
C5	-	CZRW5225B-G	Zener diode	2.85..3.15V, Zzt=30Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
C5	-	EDZ30B	Zener diode	29.19..30.69V, Izt=2mA, Zzt=200Ω, 150mW	SOD-523	6d	1a	Rhm
C5	-	EDZV30B	Zener diode	29.19..30.69V, Izt=2.0mA, Zzt=200Ω, 150mW	SOD-523	6d	2v	Rhm
C5	-	FDZ30EV	Zener diode	29.190..30.690V, Izt=2mA, Zzt=200Ω, 150mW	SOD-523	6d	1a	Fis
C5	-	FDZ30VT	Zener diode	29.190..30.690V, Izt=5mA, Zzt=200Ω, 200mW	SOD-323	5d	1a	Fis

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
C5	-	FSS36	Si-diode	SBR, 60V, 3A, Vf<0.75V(3A)	DO-214AB	1d	2j	Fag
C5	-	LBZT52B30T1G	Zener diode	29.19..30.69V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
C5	-	LEDZ30BT1G	Zener diode	29.19..30.69V, Izt=2mA, 150mW	SOD-523	6d	1g	Lrc
C5	-	LMSZ5225BT1G	Zener diode	2.85..3.15V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
C5	-	LUDZS30BT1G	Zener diode	29.19..30.69V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
C5	-	MM1Z5243B	Zener diode	12.35..13.65V, Izt=9.5mA, Zzt=13Ω, 500mW	SOD-323FL	7d	1a	Eic
C5	-	MM1Z5243BH	Zener diode	12.35..13.65V, Izt=9.5mA, Zzt=13Ω, 500mW	SOD-123	5d	1a	Zow
C5	-	MM3Z5225B	Zener diode	2.85..3.15V, Izt=20mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Ext
C5	-	MM5Z7V5B	Zener diode	7.35..7.65V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523FL	7d	1a	Tac
C5	-	MMBZ5225BV	Zener diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 200mW	SOD-523	6d	1a	Pjt
C5	-	MMSZ5225B	Zener diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 500mW	SOD-123	5d	1d	Di
C5	-	MMSZ5225B-F	Zener diode	2.85..3.15V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr
C5	-	MMSZ5225BS	Zener diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 200mW	SOD-323	5d	1d	Di
C5	-	MMSZ5225BWS	Zener diode	2.85..3.15V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
C5	-	MMSZ5243B	Zener diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 500mW	SOD-123	5d	1a	Eic
C5	-	OYD3V0T1	Zener diode	2.8..3.2V, Izt=5mA, Zzt=120Ω, 500mW	SOD-123	5d	1a	Ouy
C5	-	RKZ2.7B2KK	Zener diode	2.65..2.90V, Izt=5mA, Zzt=110Ω, 150mW	SFP	7d	1a	Ren
C5	-	RKZ2.7B2KL	Zener diode	2.65..2.90V, Izt=5mA, Zzt=110Ω, 100mW	EFP	7d	1a	Ren
C5	-	TDZ30B	Zener diode	30V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
C5	-	UDZS30B	Zener diode	30V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
C5	-	UDZV30B	Zener diode	29.19..30.69V, Izt=5.0mA, Zzt=200Ω, 200mW	SOD-323	5d	2v	Rhm
C5	-	VDZS30B	Zener diode	30V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
C5	ag	MMSZ5225B	Zener diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 500mW	SOD-123	5d	1d	Di
C5.0	-	SMBJ-LC5.0	TVS	Vbr=7.20..8.62V, Vrwm=5.0V, 62.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
C5.0	-	SMCG5.0	TVS	Vrwm=5V, 156.3A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C5.0A	-	SMBJ-LC5.0A	TVS	Vbr=7.20..7.87V, Vrwm=5.0V, 65.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
C5.0A	-	SMCG5.0A	TVS	Vrwm=5V, 163A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C5.0A	-	SMCJ5.0A	TVS	Vrwm=5V, Vbr=6.4..7.25V, 163A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C5.0C	-	SMCG5.0C	TVS	Vrwm=5V, 156.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C5.0CA	-	SMCG5.0CA	TVS	Vrwm=5V, 163A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C5.0CA	-	SMCJ5.0CA	TVS	Vrwm=5V, Vbr=6.4..7.25V, 163A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C50	-	CMHD4150	Si-diode	HS, Sw, 50V, 250mA, 400mW, Vf<1V(200mA), <4pF	SOD-123	5d	1a	Cen
C51	-	BZG03-C51	Zener diode	51V±5%, Izt=10mA, Zzt=25Ω, 1.25W	DO-214AC	1d	1a	Eic
C51	-	SMBJ-LC51	TVS	Vbr=57.5..70.1V, Vrwm=51V, 6.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
C51	-	SMCG51	TVS	Vrwm=51V, 16.5A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C51A	-	1.5SMC51A	TVS	Vrwm=43.6V, Vbr=48.5..53.6V, Ipp=21.4A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C51A	-	P6SMB51A	TVS	Vrwm=51V, Vbr=48.5..53.6V, 8.6A, 600W(1ms)	DO-214AA	1d	1a	Cen
C51A	-	SMBJ-LC51A	TVS	Vbr=57.5..63.5V, Vrwm=51V, 7.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
C51A	-	SMCG51A	TVS	Vrwm=51V, 18.2A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C51A	-	SMCJ51A	TVS	Vrwm=51V, Vbr=56.7..65.2V, 18.2A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C51C	-	1.5SMC51CA	TVS	Vrwm=43.6V, Vbr=48.5..53.6V, Ipp=21.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C51C	-	P6SMB51CA	TVS	Vrwm=51V, Vbr=48.5..53.6V, 8.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C51C	-	SMCG51C	TVS	Vrwm=51V, 16.5A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C51CA	-	SMCG51CA	TVS	Vrwm=51V, 18.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C51CA	-	SMCJ51CA	TVS	Vrwm=51V, Vbr=56.7..65.2V, 18.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C52L	-	SCM52LPT	Si-diode	SBR, 20V, 5A, Vf<0.4V(5A)	DO-214AB	1d	1a	Chm
C5334B	-	CMZ5334B	Zener diode	3.6V±5%, Zzt=3.0Ω, 1320mA, 5W	DO-214AB	1d	1a	Cen
C5335B	-	CMZ5335B	Zener diode	3.9V±5%, Zzt=2.0Ω, 1220mA, 5W	DO-214AB	1d	1a	Cen
C5336B	-	CMZ5336B	Zener diode	4.3V±5%, Zzt=2.0Ω, 1110mA, 5W	DO-214AB	1d	1a	Cen
C5337B	-	CMZ5337B	Zener diode	4.7V±5%, Zzt=2.0Ω, 1010mA, 5W	DO-214AB	1d	1a	Cen
C5338B	-	CMZ5338B	Zener diode	5.1V±5%, Zzt=2.0Ω, 930mA, 5W	DO-214AB	1d	1a	Cen
C5339B	-	CMZ5339B	Zener diode	5.6V±5%, Zzt=1.0Ω, 865mA, 5W	DO-214AB	1d	1a	Cen
C5340B	-	CMZ5340B	Zener diode	6.0V±5%, Zzt=1.0Ω, 790mA, 5W	DO-214AB	1d	1a	Cen
C5342B	-	CMZ5342B	Zener diode	6.8V±5%, Zzt=1.0Ω, 700mA, 5W	DO-214AB	1d	1a	Cen
C5343B	-	CMZ5343B	Zener diode	7.5V±5%, Zzt=1.5Ω, 630mA, 5W	DO-214AB	1d	1a	Cen
C5344B	-	CMZ5344B	Zener diode	8.2V±5%, Zzt=1.5Ω, 580mA, 5W	DO-214AB	1d	1a	Cen
C5345B	-	CMZ5345B	Zener diode	8.7V±5%, Zzt=2.0Ω, 545mA, 5W	DO-214AB	1d	1a	Cen
C5346B	-	CMZ5346B	Zener diode	9.1V±5%, Zzt=2.0Ω, 520mA, 5W	DO-214AB	1d	1a	Cen
C5347B	-	CMZ5347B	Zener diode	10V±5%, Zzt=2.0Ω, 475mA, 5W	DO-214AB	1d	1a	Cen
C5348B	-	CMZ5348B	Zener diode	11V±5%, Zzt=2.5Ω, 430mA, 5W	DO-214AB	1d	1a	Cen
C5349B	-	CMZ5349B	Zener diode	12V±5%, Zzt=2.5Ω, 395mA, 5W	DO-214AB	1d	1a	Cen
C5350B	-	CMZ5350B	Zener diode	13V±5%, Zzt=2.5Ω, 365mA, 5W	DO-214AB	1d	1a	Cen
C5351B	-	CMZ5351B	Zener diode	14V±5%, Zzt=2.5Ω, 340mA, 5W	DO-214AB	1d	1a	Cen
C5352B	-	CMZ5352B	Zener diode	15V±5%, Zzt=2.5Ω, 315mA, 5W	DO-214AB	1d	1a	Cen
C5353B	-	CMZ5353B	Zener diode	16V±5%, Zzt=2.5Ω, 295mA, 5W	DO-214AB	1d	1a	Cen
C5354B	-	CMZ5354B	Zener diode	17V±5%, Zzt=2.5Ω, 280mA, 5W	DO-214AB	1d	1a	Cen
C5355B	-	CMZ5355B	Zener diode	18V±5%, Zzt=2.5Ω, 264mA, 5W	DO-214AB	1d	1a	Cen
C5356B	-	CMZ5356B	Zener diode	19V±5%, Zzt=3.0Ω, 250mA, 5W	DO-214AB	1d	1a	Cen
C5357B	-	CMZ5357B	Zener diode	20V±5%, Zzt=3.0Ω, 237mA, 5W	DO-214AB	1d	1a	Cen
C5358B	-	CMZ5358B	Zener diode	22V±5%, Zzt=3.5Ω, 216mA, 5W	DO-214AB	1d	1a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
C5359B	-	CMZ5359B	Zener diode	24V±5%, Zzt=3.5Ω, 198mA, 5W	DO-214AB	1d	1a	Cen
C5360B	-	CMZ5360B	Zener diode	25V±5%, Zzt=4.0Ω, 190mA, 5W	DO-214AB	1d	1a	Cen
C5361B	-	CMZ5361B	Zener diode	27V±5%, Zzt=5.0Ω, 176mA, 5W	DO-214AB	1d	1a	Cen
C5362B	-	CMZ5362B	Zener diode	28V±5%, Zzt=6.0Ω, 170mA, 5W	DO-214AB	1d	1a	Cen
C5363B	-	CMZ5363B	Zener diode	30V±5%, Zzt=8.0Ω, 158mA, 5W	DO-214AB	1d	1a	Cen
C5364B	-	CMZ5364B	Zener diode	33V±5%, Zzt=10Ω, 144mA, 5W	DO-214AB	1d	1a	Cen
C5365B	-	CMZ5365B	Zener diode	36V±5%, Zzt=11Ω, 132mA, 5W	DO-214AB	1d	1a	Cen
C5366B	-	CMZ5366B	Zener diode	39V±5%, Zzt=14Ω, 122mA, 5W	DO-214AB	1d	1a	Cen
C5367B	-	CMZ5367B	Zener diode	43V±5%, Zzt=20Ω, 110mA, 5W	DO-214AB	1d	1a	Cen
C5368B	-	CMZ5368B	Zener diode	47V±5%, Zzt=25Ω, 100mA, 5W	DO-214AB	1d	1a	Cen
C5369B	-	CMZ5369B	Zener diode	51V±5%, Zzt=27Ω, 93.0mA, 5W	DO-214AB	1d	1a	Cen
C5370B	-	CMZ5370B	Zener diode	56V±5%, Zzt=35Ω, 86.0mA, 5W	DO-214AB	1d	1a	Cen
C5371B	-	CMZ5371B	Zener diode	60V±5%, Zzt=40Ω, 79.0mA, 5W	DO-214AB	1d	1a	Cen
C5372B	-	CMZ5372B	Zener diode	62V±5%, Zzt=42Ω, 76.0mA, 5W	DO-214AB	1d	1a	Cen
C5373B	-	CMZ5373B	Zener diode	68V±5%, Zzt=44Ω, 70.0mA, 5W	DO-214AB	1d	1a	Cen
C5374B	-	CMZ5374B	Zener diode	75V±5%, Zzt=45Ω, 63.0mA, 5W	DO-214AB	1d	1a	Cen
C5375B	-	CMZ5375B	Zener diode	82V±5%, Zzt=65Ω, 58.0mA, 5W	DO-214AB	1d	1a	Cen
C5376B	-	CMZ5376B	Zener diode	87V±5%, Zzt=75Ω, 54.5mA, 5W	DO-214AB	1d	1a	Cen
C5377B	-	CMZ5377B	Zener diode	91V±5%, Zzt=75Ω, 52.5mA, 5W	DO-214AB	1d	1a	Cen
C5378B	-	CMZ5378B	Zener diode	100V±5%, Zzt=90Ω, 47.5mA, 5W	DO-214AB	1d	1a	Cen
C5379B	-	CMZ5379B	Zener diode	110V±5%, Zzt=125Ω, 43.0mA, 5W	DO-214AB	1d	1a	Cen
C5380B	-	CMZ5380B	Zener diode	120V±5%, Zzt=170Ω, 39.5mA, 5W	DO-214AB	1d	1a	Cen
C5381B	-	CMZ5381B	Zener diode	130V±5%, Zzt=190Ω, 36.6mA, 5W	DO-214AB	1d	1a	Cen
C5382B	-	CMZ5382B	Zener diode	140V±5%, Zzt=230Ω, 34.0mA, 5W	DO-214AB	1d	1a	Cen
C5383B	-	CMZ5383B	Zener diode	150V±5%, Zzt=330Ω, 31.6mA, 5W	DO-214AB	1d	1a	Cen
C5384B	-	CMZ5384B	Zener diode	160V±5%, Zzt=350Ω, 29.4mA, 5W	DO-214AB	1d	1a	Cen
C5385B	-	CMZ5385B	Zener diode	170V±5%, Zzt=380Ω, 28.0mA, 5W	DO-214AB	1d	1a	Cen
C5386B	-	CMZ5386B	Zener diode	180V±5%, Zzt=430Ω, 26.4mA, 5W	DO-214AB	1d	1a	Cen
C5387B	-	CMZ5387B	Zener diode	190V±5%, Zzt=450Ω, 25.0mA, 5W	DO-214AB	1d	1a	Cen
C5388B	-	CMZ5388B	Zener diode	200V±5%, Zzt=480Ω, 23.6mA, 5W	DO-214AB	1d	1a	Cen
C53L	-	SCM53LPT	Si-diode	SBR, 30V, 5A, Vf<0.4V(5A)	DO-214AB	1d	1a	Chm
C54	-	CMHSH5-4	Si-diode	HS, Sw, 40V, 500mA, Vf<0.51V(500mA), 50pF	SOD-123	5d	1a	Cen
C54	-	SMBJ-LC54	TVS	Vbr=60.8..74.1V, Vrwm=54V, 6.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
C54	-	SMCG54	TVS	Vrwm=54V, 15.6A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C54A	-	SMBJ-LC54A	TVS	Vbr=60.8..67.1V, Vrwm=54V, 6.9A, 600W(1ms)	DO-214AA	1d	1a	Eic
C54A	-	SMCG54A	TVS	Vrwm=54V, 17.2A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C54A	-	SMCJ54A	TVS	Vrwm=54V, Vbr=60..69V, 17.2A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C54C	-	SMCG54C	TVS	Vrwm=54V, 15.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C54CA	-	SMCG54CA	TVS	Vrwm=54V, 17.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C54CA	-	SMCJ54CA	TVS	Vrwm=54V, Vbr=60..69V, 17.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C54H	-	SCM54LHPT	Si-diode	SBR, 40V, 5A, Vf<0.45V(5A)	DO-214AB	1d	1a	Chm
C54L	-	SCM54LPT	Si-diode	SBR, 40V, 5A, Vf<0.4V(5A)	DO-214AB	1d	1a	Chm
C56	-	BZG03-C56	Zener diode	56V±5%, Izt=10mA, Zzt=25Ω, 1.25W	DO-214AC	1d	1a	Eic
C56A	-	1.5SMC56A	TVS	Vrwm=47.8V, Vbr=53.2..58.8V, Ipp=19.5A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C56A	-	P6SMB56A	TVS	Vrwm=56V, Vbr=53.2..58.8V, 7.8A, 600W(1ms)	DO-214AA	1d	1a	Cen
C56C	-	1.5SMC56CA	TVS	Vrwm=47.8V, Vbr=53.2..58.8V, Ipp=19.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C56C	-	P6SMB56CA	TVS	Vrwm=56V, Vbr=53.2..58.8V, 7.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C58	-	SMBJ-LC58	TVS	Vbr=65.2..79.5V, Vrwm=58V, 5.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
C58	-	SMCG58	TVS	Vrwm=58V, 14.6A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C58A	-	SMBJ-LC58A	TVS	Vbr=65.2..72.0V, Vrwm=58V, 6.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
C58A	-	SMCG58A	TVS	Vrwm=58V, 16A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C58A	-	SMCJ58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, 16A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C58C	-	SMCG58C	TVS	Vrwm=58V, 14.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C58CA	-	SMCG58CA	TVS	Vrwm=58V, 16A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C58CA	-	SMCJ58CA	TVS	Vrwm=58V, Vbr=64.4..74.1V, 16A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C5913B	-	CMZ5913B	Zener diode	3.3V±5%, 113.6mA, Zzt=10Ω, 1.5W	DO-214AC	1d	1a	Cen
C5913BP	-	CMZ5913BP	Zener diode	3.3V±5%, 113.6mA, Zzt=10Ω, 2.5W	DO-214AA	1d	1a	Cen
C5914B	-	CMZ5914B	Zener diode	3.6V±5%, 104.2mA, Zzt=9.0Ω, 1.5W	DO-214AC	1d	1a	Cen
C5914BP	-	CMZ5914BP	Zener diode	3.6V±5%, 104.2mA, Zzt=9.0Ω, 2.5W	DO-214AA	1d	1a	Cen
C5915B	-	CMZ5915B	Zener diode	3.9V±5%, 96.1mA, Zzt=7.5Ω, 1.5W	DO-214AC	1d	1a	Cen
C5915BP	-	CMZ5915BP	Zener diode	3.9V±5%, 96.1mA, Zzt=7.5Ω, 2.5W	DO-214AA	1d	1a	Cen
C5916B	-	CMZ5916B	Zener diode	4.3V±5%, 87.2mA, Zzt=6.0Ω, 1.5W	DO-214AC	1d	1a	Cen
C5916BP	-	CMZ5916BP	Zener diode	4.3V±5%, 87.2mA, Zzt=6.0Ω, 2.5W	DO-214AA	1d	1a	Cen
C5917B	-	CMZ5917B	Zener diode	4.7V±5%, 79.8mA, Zzt=5.0Ω, 1.5W	DO-214AC	1d	1a	Cen
C5917BP	-	CMZ5917BP	Zener diode	4.7V±5%, 79.8mA, Zzt=5.0Ω, 2.5W	DO-214AA	1d	1a	Cen
C5918B	-	CMZ5918B	Zener diode	5.1V±5%, 73.5mA, Zzt=4.0Ω, 1.5W	DO-214AC	1d	1a	Cen
C5918BP	-	CMZ5918BP	Zener diode	5.1V±5%, 73.5mA, Zzt=4.0Ω, 2.5W	DO-214AA	1d	1a	Cen
C5919B	-	CMZ5919B	Zener diode	5.6V±5%, 66.9mA, Zzt=2.0Ω, 1.5W	DO-214AC	1d	1a	Cen
C5919BP	-	CMZ5919BP	Zener diode	5.6V±5%, 66.9mA, Zzt=2.0Ω, 2.5W	DO-214AA	1d	1a	Cen
C5920B	-	CMZ5920B	Zener diode	6.2V±5%, 60.5mA, Zzt=2.0Ω, 1.5W	DO-214AC	1d	1a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
C5920BP	-	CMZ5920BP	Zener diode	6.2V±5%, 60.5mA, Zzt=2.0Ω, 2.5W	DO-214AA	1d	1a	Cen
C5921B	-	CMZ5921B	Zener diode	6.8V±5%, 55.1mA, Zzt=2.5Ω, 1.5W	DO-214AC	1d	1a	Cen
C5921BP	-	CMZ5921BP	Zener diode	6.8V±5%, 55.1mA, Zzt=2.5Ω, 2.5W	DO-214AA	1d	1a	Cen
C5922B	-	CMZ5922B	Zener diode	7.5V±5%, 50.0mA, Zzt=3.0Ω, 1.5W	DO-214AC	1d	1a	Cen
C5922BP	-	CMZ5922BP	Zener diode	7.5V±5%, 50.0mA, Zzt=3.0Ω, 2.5W	DO-214AA	1d	1a	Cen
C5923B	-	CMZ5923B	Zener diode	8.2V±5%, 45.7mA, Zzt=3.5Ω, 1.5W	DO-214AC	1d	1a	Cen
C5923BP	-	CMZ5923BP	Zener diode	8.2V±5%, 45.7mA, Zzt=3.5Ω, 2.5W	DO-214AA	1d	1a	Cen
C5924B	-	CMZ5924B	Zener diode	9.1V±5%, 41.2mA, Zzt=4.0Ω, 1.5W	DO-214AC	1d	1a	Cen
C5924BP	-	CMZ5924BP	Zener diode	9.1V±5%, 41.2mA, Zzt=4.0Ω, 2.5W	DO-214AA	1d	1a	Cen
C5925B	-	CMZ5925B	Zener diode	10V±5%, 37.5mA, Zzt=4.5Ω, 1.5W	DO-214AC	1d	1a	Cen
C5925BP	-	CMZ5925BP	Zener diode	10V±5%, 37.5mA, Zzt=4.5Ω, 2.5W	DO-214AA	1d	1a	Cen
C5926B	-	CMZ5926B	Zener diode	11V±5%, 34.1mA, Zzt=5.5Ω, 1.5W	DO-214AC	1d	1a	Cen
C5926BP	-	CMZ5926BP	Zener diode	11V±5%, 34.1mA, Zzt=5.5Ω, 2.5W	DO-214AA	1d	1a	Cen
C5927B	-	CMZ5927B	Zener diode	12V±5%, 31.2mA, Zzt=6.5Ω, 1.5W	DO-214AC	1d	1a	Cen
C5927BP	-	CMZ5927BP	Zener diode	12V±5%, 31.2mA, Zzt=6.5Ω, 2.5W	DO-214AA	1d	1a	Cen
C5928B	-	CMZ5928B	Zener diode	13V±5%, 28.8mA, Zzt=7.0Ω, 1.5W	DO-214AC	1d	1a	Cen
C5928BP	-	CMZ5928BP	Zener diode	13V±5%, 28.8mA, Zzt=7.0Ω, 2.5W	DO-214AA	1d	1a	Cen
C5929B	-	CMZ5929B	Zener diode	15V±5%, 25.0mA, Zzt=9.0Ω, 1.5W	DO-214AC	1d	1a	Cen
C5929BP	-	CMZ5929BP	Zener diode	15V±5%, 25.0mA, Zzt=9.0Ω, 2.5W	DO-214AA	1d	1a	Cen
C5930B	-	CMZ5930B	Zener diode	16V±5%, 23.4mA, Zzt=10Ω, 1.5W	DO-214AC	1d	1a	Cen
C5930BP	-	CMZ5930BP	Zener diode	16V±5%, 23.4mA, Zzt=10Ω, 2.5W	DO-214AA	1d	1a	Cen
C5931B	-	CMZ5931B	Zener diode	18V±5%, 20.8mA, Zzt=12Ω, 1.5W	DO-214AC	1d	1a	Cen
C5931BP	-	CMZ5931BP	Zener diode	18V±5%, 20.8mA, Zzt=12Ω, 2.5W	DO-214AA	1d	1a	Cen
C5932B	-	CMZ5932B	Zener diode	20V±5%, 18.7mA, Zzt=14Ω, 1.5W	DO-214AC	1d	1a	Cen
C5932BP	-	CMZ5932BP	Zener diode	20V±5%, 18.7mA, Zzt=14Ω, 2.5W	DO-214AA	1d	1a	Cen
C5933B	-	CMZ5933B	Zener diode	22V±5%, 17.0mA, Zzt=17.5Ω, 1.5W	DO-214AC	1d	1a	Cen
C5933BP	-	CMZ5933BP	Zener diode	22V±5%, 17.0mA, Zzt=17.5Ω, 2.5W	DO-214AA	1d	1a	Cen
C5934B	-	CMZ5934B	Zener diode	24V±5%, 15.6mA, Zzt=19Ω, 1.5W	DO-214AC	1d	1a	Cen
C5934BP	-	CMZ5934BP	Zener diode	24V±5%, 15.6mA, Zzt=19Ω, 2.5W	DO-214AA	1d	1a	Cen
C5935B	-	CMZ5935B	Zener diode	27V±5%, 13.9mA, Zzt=23Ω, 1.5W	DO-214AC	1d	1a	Cen
C5935BP	-	CMZ5935BP	Zener diode	27V±5%, 13.9mA, Zzt=23Ω, 2.5W	DO-214AA	1d	1a	Cen
C5936B	-	CMZ5936B	Zener diode	30V±5%, 12.5mA, Zzt=26Ω, 1.5W	DO-214AC	1d	1a	Cen
C5936BP	-	CMZ5936BP	Zener diode	30V±5%, 12.5mA, Zzt=26Ω, 2.5W	DO-214AA	1d	1a	Cen
C5937B	-	CMZ5937B	Zener diode	33V±5%, 11.4mA, Zzt=33Ω, 1.5W	DO-214AC	1d	1a	Cen
C5937BP	-	CMZ5937BP	Zener diode	33V±5%, 11.4mA, Zzt=33Ω, 2.5W	DO-214AA	1d	1a	Cen
C5938B	-	CMZ5938B	Zener diode	36V±5%, 10.4mA, Zzt=38Ω, 1.5W	DO-214AC	1d	1a	Cen
C5938BP	-	CMZ5938BP	Zener diode	36V±5%, 10.4mA, Zzt=38Ω, 2.5W	DO-214AA	1d	1a	Cen
C5939B	-	CMZ5939B	Zener diode	39V±5%, 9.6mA, Zzt=45Ω, 1.5W	DO-214AC	1d	1a	Cen
C5939BP	-	CMZ5939BP	Zener diode	39V±5%, 9.6mA, Zzt=45Ω, 2.5W	DO-214AA	1d	1a	Cen
C5940B	-	CMZ5940B	Zener diode	43V±5%, 8.7mA, Zzt=53Ω, 1.5W	DO-214AC	1d	1a	Cen
C5940BP	-	CMZ5940BP	Zener diode	43V±5%, 8.7mA, Zzt=53Ω, 2.5W	DO-214AA	1d	1a	Cen
C5941B	-	CMZ5941B	Zener diode	47V±5%, 8.0mA, Zzt=67Ω, 1.5W	DO-214AC	1d	1a	Cen
C5941BP	-	CMZ5941BP	Zener diode	47V±5%, 8.0mA, Zzt=67Ω, 2.5W	DO-214AA	1d	1a	Cen
C5942B	-	CMZ5942B	Zener diode	51V±5%, 7.3mA, Zzt=70Ω, 1.5W	DO-214AC	1d	1a	Cen
C5942BP	-	CMZ5942BP	Zener diode	51V±5%, 7.3mA, Zzt=70Ω, 2.5W	DO-214AA	1d	1a	Cen
C5943B	-	CMZ5943B	Zener diode	56V±5%, 6.7mA, Zzt=86Ω, 1.5W	DO-214AC	1d	1a	Cen
C5943BP	-	CMZ5943BP	Zener diode	56V±5%, 6.7mA, Zzt=86Ω, 2.5W	DO-214AA	1d	1a	Cen
C5944B	-	CMZ5944B	Zener diode	62V±5%, 6.0mA, Zzt=100Ω, 1.5W	DO-214AC	1d	1a	Cen
C5944BP	-	CMZ5944BP	Zener diode	62V±5%, 6.0mA, Zzt=100Ω, 2.5W	DO-214AA	1d	1a	Cen
C5945B	-	CMZ5945B	Zener diode	68V±5%, 5.5mA, Zzt=120Ω, 1.5W	DO-214AC	1d	1a	Cen
C5945BP	-	CMZ5945BP	Zener diode	68V±5%, 5.5mA, Zzt=120Ω, 2.5W	DO-214AA	1d	1a	Cen
C5946B	-	CMZ5946B	Zener diode	75V±5%, 5.0mA, Zzt=140Ω, 1.5W	DO-214AC	1d	1a	Cen
C5946BP	-	CMZ5946BP	Zener diode	75V±5%, 5.0mA, Zzt=140Ω, 2.5W	DO-214AA	1d	1a	Cen
C5947B	-	CMZ5947B	Zener diode	82V±5%, 4.6mA, Zzt=160Ω, 1.5W	DO-214AC	1d	1a	Cen
C5947BP	-	CMZ5947BP	Zener diode	82V±5%, 4.6mA, Zzt=160Ω, 2.5W	DO-214AA	1d	1a	Cen
C5948B	-	CMZ5948B	Zener diode	91V±5%, 4.1mA, Zzt=200Ω, 1.5W	DO-214AC	1d	1a	Cen
C5948BP	-	CMZ5948BP	Zener diode	91V±5%, 4.1mA, Zzt=200Ω, 2.5W	DO-214AA	1d	1a	Cen
C5949B	-	CMZ5949B	Zener diode	100V±5%, 3.7mA, Zzt=250Ω, 1.5W	DO-214AC	1d	1a	Cen
C5949BP	-	CMZ5949BP	Zener diode	100V±5%, 3.7mA, Zzt=250Ω, 2.5W	DO-214AA	1d	1a	Cen
C5950B	-	CMZ5950B	Zener diode	110V±5%, 3.4mA, Zzt=300Ω, 1.5W	DO-214AC	1d	1a	Cen
C5950BP	-	CMZ5950BP	Zener diode	110V±5%, 3.4mA, Zzt=300Ω, 2.5W	DO-214AA	1d	1a	Cen
C5951B	-	CMZ5951B	Zener diode	120V±5%, 3.1mA, Zzt=360Ω, 1.5W	DO-214AC	1d	1a	Cen
C5951BP	-	CMZ5951BP	Zener diode	120V±5%, 3.1mA, Zzt=360Ω, 2.5W	DO-214AA	1d	1a	Cen
C5952B	-	CMZ5952B	Zener diode	130V±5%, 2.9mA, Zzt=450Ω, 1.5W	DO-214AC	1d	1a	Cen
C5952BP	-	CMZ5952BP	Zener diode	130V±5%, 2.9mA, Zzt=450Ω, 2.5W	DO-214AA	1d	1a	Cen
C5953B	-	CMZ5953B	Zener diode	150V±5%, 2.5mA, Zzt=600Ω, 1.5W	DO-214AC	1d	1a	Cen
C5953BP	-	CMZ5953BP	Zener diode	150V±5%, 2.5mA, Zzt=600Ω, 2.5W	DO-214AA	1d	1a	Cen
C5954B	-	CMZ5954B	Zener diode	160V±5%, 2.3mA, Zzt=700Ω, 1.5W	DO-214AC	1d	1a	Cen
C5954BP	-	CMZ5954BP	Zener diode	160V±5%, 2.3mA, Zzt=700Ω, 2.5W	DO-214AA	1d	1a	Cen
C5955B	-	CMZ5955B	Zener diode	180V±5%, 2.1mA, Zzt=900Ω, 1.5W	DO-214AC	1d	1a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
C5955BP	-	CMZ5955BP	Zener diode	180V±5%, 2.1mA, Zzt=900Ω, 2.5W	DO-214AA	1d	1a	Cen
C5956B	-	CMZ5956B	Zener diode	200V±5%, 1.9mA, Zzt=1200Ω, 1.5W	DO-214AC	1d	1a	Cen
C5956BP	-	CMZ5956BP	Zener diode	200V±5%, 1.9mA, Zzt=1200Ω, 2.5W	DO-214AA	1d	1a	Cen
C5A	-	1.5SCMJ10A	TVS	Vbr=9.5..10.5V, Vrwm=8.55V, 29A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C5C	-	1.5SCMJ10CA	TVS	Vbr=9.5..10.5V, Vrwm=8.55V, 29A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C5V1	-	SMA5C5V1	Zener diode	5.1V±5%, Izt=45mA, Zzt<10Ω, 3W	DO-214AC	1d	1a	Mco
C5V6	-	SMA5C5V6	Zener diode	5.6V±5%, Izt=45mA, Zzt<7Ω, 3W	DO-214AC	1d	1a	Mco
C6	-	BZT52H-C75	Zener diode	75.0V±5%, Izt=2mA, Zzt=175Ω, 375mW	SOD-123FL	7d	1a	Phi
C6	-	BZX384B3V9-V-G	Zener diode	3.9V±2.5%, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	2m	Vs
C6	-	BZX585-B3V9	Zener diode	3.9V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
C6	-	FSS39	Si-diode	SBR, 90V, 3A, Vf<0.85V(3A)	DO-214AB	1d	2j	Fag
C6	-	MM1Z5265B	Zener diode	58.90..65.10V, Izt=2.0mA, Zzt=185Ω, 500mW	SOD-323FL	7d	1a	Eic
C6	-	MM1Z5265BH	Zener diode	58.9..65.1V, Izt=2mA, Zzt=185Ω, 500mW	SOD-123	5d	1a	Zow
C6	-	MMSZ5265B	Zener diode	62V±5%, Izt=2mA, Zzt=185Ω, 500mW	SOD-123	5d	1a	Eic
C6.0	-	SMBJ-LC6.0	TVS	Vbr=7.47..8.95V, Vrwm=6.0V, 52.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
C6.0	-	SMCG6.0	TVS	Vrwm=6V, 131.6A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C6.0A	-	SMBJ-LC6.0A	TVS	Vbr=7.47..8.17V, Vrwm=6.0V, 58.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
C6.0A	-	SMCG6.0A	TVS	Vrwm=6V, 145.6A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C6.0A	-	SMCJ6.0A	TVS	Vrwm=6V, Vbr=6.67..7.67V, 145.6A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C6.0C	-	SMCG6.0C	TVS	Vrwm=6V, 131.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C6.0CA	-	SMCG6.0CA	TVS	Vrwm=6V, 145.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C6.0CA	-	SMCJ6.0CA	TVS	Vrwm=6V, Vbr=6.67..7.67V, 145.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C6.5	-	SMBJ-LC6.5	TVS	Vbr=8.02..9.62V, Vrwm=6.5V, 48.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
C6.5	-	SMCG6.5	TVS	Vrwm=6.5V, 122A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C6.5A	-	SMBJ-LC6.5A	TVS	Vbr=8.02..8.78V, Vrwm=6.5V, 53.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
C6.5A	-	SMCG6.5A	TVS	Vrwm=6.5V, 133.9A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C6.5A	-	SMCJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.3V, 133.9A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C6.5C	-	SMCG6.5C	TVS	Vrwm=6.5V, 122A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C6.5CA	-	SMCG6.5CA	TVS	Vrwm=6.5V, 133.9A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C6.5CA	-	SMCJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.3V, 133.9A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C60	-	SMBJ-LC60	TVS	Vbr=67.5..82.3V, Vrwm=60V, 5.6A, 600W(1ms)	DO-214AA	1d	1a	Eic
C60	-	SMCG60	TVS	Vrwm=60V, 14A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C60A	-	SMBJ-LC60A	TVS	Vbr=67.5..74.5V, Vrwm=60V, 6.2A, 600W(1ms)	DO-214AA	1d	1a	Eic
C60A	-	SMCG60A	TVS	Vrwm=60V, 15.5A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C60A	-	SMCJ60A	TVS	Vrwm=60V, Vbr=66.7..76.7V, 15.5A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C60C	-	SMCG60C	TVS	Vrwm=60V, 14A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C60CA	-	SMCG60CA	TVS	Vrwm=60V, 15.5A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C60CA	-	SMCJ60CA	TVS	Vrwm=60V, Vbr=66.7..76.7V, 15.5A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C61	-	CMDD6001	Si-diode	Sw, 75V, 250mA, 250mW, Vf<1.1V(100mA), <2pF	SOD-323	5d	1a	Cen
C62	-	BZG03-C62	Zener diode	62V±5%, Izt=10mA, Zzt=25Ω, 1.25W	DO-214AC	1d	1a	Eic
C62A	-	1.5SMC62A	TVS	Vrwm=53V, Vbr=58.9..65.1V, Ipp=17.7A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C62A	-	P6SMB62A	TVS	Vrwm=62V, Vbr=58.9..65.1V, 7.1A, 600W(1ms)	DO-214AA	1d	1a	Cen
C62C	-	1.5SMC62CA	TVS	Vrwm=53V, Vbr=58.9..65.1V, Ipp=17.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C62C	-	P6SMB62CA	TVS	Vrwm=62V, Vbr=58.9..65.1V, 7.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C64	-	SMBJ-LC64	TVS	Vbr=71.9..87.7V, Vrwm=64V, 5.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
C64	-	SMCG64	TVS	Vrwm=64V, 13.2A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C64A	-	SMBJ-LC64A	TVS	Vbr=71.9..79.4V, Vrwm=64V, 5.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
C64A	-	SMCG64A	TVS	Vrwm=64V, 14.6A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C64A	-	SMCJ64A	TVS	Vrwm=64V, Vbr=71.1..81.8V, 14.6A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C64C	-	SMCG64C	TVS	Vrwm=64V, 13.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C64CA	-	SMCG64CA	TVS	Vrwm=64V, 14.6A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C64CA	-	SMCJ64CA	TVS	Vrwm=64V, Vbr=71.1..81.8V, 14.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C68	-	BZG03-C68	Zener diode	68V±5%, Izt=10mA, Zzt=25Ω, 1.25W	DO-214AC	1d	1a	Eic
C68A	-	1.5SMC68A	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, Ipp=16.3A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C68A	-	P6SMB68A	TVS	Vrwm=68V, Vbr=64.6..71.4V, 6.5A, 600W(1ms)	DO-214AA	1d	1a	Cen
C68C	-	1.5SMC68CA	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, Ipp=16.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C68C	-	P6SMB68CA	TVS	Vrwm=68V, Vbr=64.6..71.4V, 6.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C6A	-	1.5SCMJ11A	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 27A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C6C	-	1.5SCMJ11CA	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 27A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C6V2	-	SMA5C6V2	Zener diode	6.2V±5%, Izt=35mA, Zzt<4Ω, 3W	DO-214AC	1d	1a	Mco
C6V8	-	SMA5C6V8	Zener diode	6.8V±5%, Izt=35mA, Zzt<3.5Ω, 3W	DO-214AC	1d	1a	Mco
C6V8A	-	1.5SMC6.8A	TVS	Vrwm=5.8V, Vbr=6.45..7.14 V, Ipp=143A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C6V8A	-	P6SMB6.8A	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 57.1A, 600W(1ms)	DO-214AA	1d	1a	Cen
C6V8C	-	1.5SMC6.8CA	TVS	Vrwm=5.8V, Vbr=6.45..7.14 V, Ipp=143A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C6V8C	-	P6SMB6.8CA	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 57.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C7	-	BZX384B4V3-V-G	Zener diode	4.3V±2.5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	2m	Vs
C7	-	BZX585-B4V3	Zener diode	4.3V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
C7	-	FSS310	Si-diode	SBR, 100V, 3A, Vf<0.85V(3A)	DO-214AB	1d	2j	Fag
C7	-	RKZ3.0B2KK	Zener diode	2.95..3.20V, Izt=5mA, Zzt=120Ω, 150mW	SFP	7d	1a	Ren
C7	-	RKZ3.0B2KL	Zener diode	2.95..3.20V, Izt=5mA, Zzt=120Ω, 100mW	EFP	7d	1a	Ren

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
C7.0	-	SMBJ-LC7.0	TVS	Vbr=8.58..10.31V, Vrwm=7.0V, 45.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
C7.0	-	SMCG7.0	TVS	Vrwm=7V, 112.8A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C7.0A	-	SMBJ-LC7.0A	TVS	Vbr=8.58..9.40V, Vrwm=7.0V, 50.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
C7.0A	-	SMCG7.0A	TVS	Vrwm=7V, 125A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C7.0A	-	SMCJ7.0A	TVS	Vrwm=7V, Vbr=7.78..8.95V, 125A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C7.0C	-	SMCG7.0C	TVS	Vrwm=7V, 112.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C7.0CA	-	SMCG7.0CA	TVS	Vrwm=7V, 125A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C7.0CA	-	SMCJ7.0CA	TVS	Vrwm=7V, Vbr=7.78..8.95V, 125A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C7.5	-	SMBJ-LC7.5	TVS	Vbr=9.13..11.0V, Vrwm=7.5V, 42.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
C7.5	-	SMCG7.5	TVS	Vrwm=7.5V, 104.9A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C7.5A	-	SMBJ-LC7.5A	TVS	Vbr=9.13..10.01V, Vrwm=7.5V, 46.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
C7.5A	-	SMCG7.5A	TVS	Vrwm=7.5V, 116.3A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C7.5A	-	SMCJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 116.3A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C7.5C	-	SMCG7.5C	TVS	Vrwm=7.5V, 104.9A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C7.5CA	-	SMCG7.5CA	TVS	Vrwm=7.5V, 116.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C7.5CA	-	SMCJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 116.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C70	-	SMBJ-LC70	TVS	Vbr=78.6..95.9V, Vrwm=70V, 4.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
C70	-	SMCG70	TVS	Vrwm=70V, 12A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C70A	-	SMBJ-LC70A	TVS	Vbr=78.6..86.8V, Vrwm=70V, 5.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
C70A	-	SMCG70A	TVS	Vrwm=70V, 13.3A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C70A	-	SMCJ70A	TVS	Vrwm=70V, Vbr=77.8..89.5V, 13.3A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C70C	-	SMCG70C	TVS	Vrwm=70V, 12A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C70CA	-	SMCG70CA	TVS	Vrwm=70V, 13.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C70CA	-	SMCJ70CA	TVS	Vrwm=70V, Vbr=77.8..89.5V, 13.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C75	-	BZG03-C75	Zener diode	75V±5%, Izt=10mA, Zzt=30Ω, 1.25W	DO-214AC	1d	1a	Eic
C75	-	SMBJ-LC75	TVS	Vbr=84.1..102.8V, Vrwm=75V, 4.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
C75	-	SMCG75	TVS	Vrwm=75V, 11.2A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C75A	-	1.5SMC75A	TVS	Vrwm=64.1V, Vbr=71.3..78.8V, Ipp=14.6A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C75A	-	P6SMB75A	TVS	Vrwm=75V, Vbr=71.3..78.8V, 5.8A, 600W(1ms)	DO-214AA	1d	1a	Cen
C75A	-	SMBJ-LC75A	TVS	Vbr=84.1..92.9V, Vrwm=75V, 4.9A, 600W(1ms)	DO-214AA	1d	1a	Eic
C75A	-	SMCG75A	TVS	Vrwm=75V, 12.4A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C75A	-	SMCJ75A	TVS	Vrwm=75V, Vbr=83.3..95.8V, 12.4A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C75C	-	1.5SMC75CA	TVS	Vrwm=64.1V, Vbr=71.3..78.8V, Ipp=14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C75C	-	P6SMB75CA	TVS	Vrwm=75V, Vbr=71.3..78.8V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C75C	-	SMCG75C	TVS	Vrwm=75V, 11.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C75CA	-	SMCG75CA	TVS	Vrwm=75V, 12.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C75CA	-	SMCJ75CA	TVS	Vrwm=75V, Vbr=83.3..95.8V, 12.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C76	-	CMHD7006	Si-diode	HV, Sw, 600V, 100mA, 400mW, Vf<1.4V(100mA), <5pF	SOD-123	5d	1a	Cen
C78	-	SMBJ-LC78	TVS	Vbr=87.5..106.8V, Vrwm=78V, 4.3A, 600W(1ms)	DO-214AA	1d	1a	Eic
C78	-	SMCG78	TVS	Vrwm=78V, 10.8A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C78A	-	SMBJ-LC78A	TVS	Vbr=87.5..96.6V, Vrwm=78V, 4.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
C78A	-	SMCG78A	TVS	Vrwm=78V, 11.9A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C78A	-	SMCJ78A	TVS	Vrwm=78V, Vbr=86.7..99.7V, 11.4A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C78C	-	SMCG78C	TVS	Vrwm=78V, 10.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C78CA	-	SMCG78CA	TVS	Vrwm=78V, 11.9A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C78CA	-	SMCJ78CA	TVS	Vrwm=78V, Vbr=86.7..99.7V, 11.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C7A	-	1.5SCMJ12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C7C	-	1.5SCMJ12CA	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C7V5	-	SMA5C7V5	Zener diode	7.5V±5%, Izt=35mA, Zzt<3Ω, 3W	DO-214AC	1d	1a	Mco
C7V5A	-	1.5SMC7.5A	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=132A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C7V5A	-	P6SMB7.5A	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 53.1A, 600W(1ms)	DO-214AA	1d	1a	Cen
C7V5C	-	1.5SMC7.5CA	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=132A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C7V5C	-	P6SMB7.5CA	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 53.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C8	-	BZT52C3V3WT	Zener diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 200mW	SOD-523	6d	1a	Ttr
C8	-	BZX384B4V7-V-G	Zener diode	4.7V±2.5%, Izt=5mA, Zzt=50Ω, 200mW	SOD-323	5d	2m	Vs
C8	-	BZX585-B4V7	Zener diode	4.7V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
C8	-	FSS315	Si-diode	SBR, 150V, 3A, Vf<0.95V(3A)	DO-214AB	1d	2j	Fag
C8	-	MM5Z3V3	Zener diode	3.3V±5%, Izt=5mA, Zzt=95Ω, 200mW	SOD-523	6d	1a	Eic
C8	-	MM5Z3V3H	Zener diode	3.1..3.5V, Izt=5mA, Zzt=95Ω, 200mW	SOD-523	6d	1a	Zow
C8.0	-	SMBJ-LC8.0	TVS	Vbr=9.69..11.70V, Vrwm=8.0V, 40.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
C8.0	-	SMCG8.0	TVS	Vrwm=8V, 100A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C8.0A	-	SMBJ-LC8.0A	TVS	Vbr=9.69..10.63V, Vrwm=8.0V, 44.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
C8.0A	-	SMCG8.0A	TVS	Vrwm=8V, 110.3A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C8.0A	-	SMCJ8.0A	TVS	Vrwm=8V, Vbr=8.89..10.23V, 110.3A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C8.0C	-	SMCG8.0C	TVS	Vrwm=8V, 100A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C8.0CA	-	SMCG8.0CA	TVS	Vrwm=8V, 110.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C8.0CA	-	SMCJ8.0CA	TVS	Vrwm=8V, Vbr=8.89..10.23V, 110.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C8.5	-	SMBJ-LC8.5	TVS	Vbr=10.24..12.3V, Vrwm=8.5V, 37.7A, 600W(1ms)	DO-214AA	1d	1a	Eic
C8.5	-	SMCG8.5	TVS	Vrwm=8.5V, 94.3A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C8.5A	-	SMBJ-LC8.5A	TVS	Vbr=10.24..11.2V, Vrwm=8.5V, 41.7A, 600W(1ms)	DO-214AA	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
C8.5A	-	SMCG8.5A	TVS	Vrwm=8.5V, 104.2A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C8.5A	-	SMCJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 104.2A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C8.5C	-	SMCG8.5C	TVS	Vrwm=8.5V, 94.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C8.5CA	-	SMCG8.5CA	TVS	Vrwm=8.5V, 104.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C8.5CA	-	SMCJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 104.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C82	-	BZG03-C82	Zener diode	82V±5%, Izt=10mA, Zzt=30Ω, 1.25W	DO-214AC	1d	1a	Eic
C82A	-	1.5SMC82A	TVS	Vrwm=70.1V, Vbr=77.9..86.1V, Ipp=13.3A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C82A	-	P6SMB82A	TVS	Vrwm=82V, Vbr=77.9..86.1V, 5.3A, 600W(1ms)	DO-214AA	1d	1a	Cen
C82C	-	1.5SMC82CA	TVS	Vrwm=70.1V, Vbr=77.9..86.1V, Ipp=13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C82C	-	P6SMB82CA	TVS	Vrwm=82V, Vbr=77.9..86.1V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C85	-	SMBJ-LC85	TVS	Vbr=95.2..115.8V, Vrwm=85V, 3.9A, 600W(1ms)	DO-214AA	1d	1a	Eic
C85	-	SMCG85	TVS	Vrwm=85V, 9.9A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C85A	-	SMBJ-LC85A	TVS	Vbr=95.2..104.8V, Vrwm=85V, 4.4A, 600W(1ms)	DO-214AA	1d	1a	Eic
C85A	-	SMCG85A	TVS	Vrwm=85V, 10.9A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C85A	-	SMCJ85A	TVS	Vrwm=85V, Vbr=94.4..108.2V, 10.4A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C85C	-	SMCG85C	TVS	Vrwm=85V, 9.9A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C85CA	-	SMCG85CA	TVS	Vrwm=85V, 10.9A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C85CA	-	SMCJ85CA	TVS	Vrwm=85V, Vbr=94.4..108.2V, 10.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C8A	-	1.5SCMJ13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C8C	-	1.5SCMJ13CA	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C8V2	-	SMA5C8V2	Zener diode	8.2V±5%, Izt=25mA, Zzt<5Ω, 3W	DO-214AC	1d	1a	Mco
C8V2A	-	1.5SMC8.2A	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=124A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C8V2A	-	P6SMB8.2A	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 49.6A, 600W(1ms)	DO-214AA	1d	1a	Cen
C8V2C	-	1.5SMC8.2CA	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=124A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C8V2C	-	P6SMB8.2CA	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 49.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C9	-	BZT52C39WT	Zener diode	37.05..40.95V, Izt=5mA, Zzt=130Ω, 200mW	SOD-523	6d	1a	Ttr
C9	-	BZX384B5V1-V-G	Zener diode	5.1V±2.5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	2m	Vs
C9	-	BZX585-B5V1	Zener diode	5.1V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
C9	-	MM5Z39H	Zener diode	37..41V, Izt=2mA, Zzt=130Ω, 200mW	SOD-523	6d	1a	Zow
C9	-	MM5Z39V	Zener diode	39V±5%, Izt=2mA, Zzt=130Ω, 200mW	SOD-523	6d	1a	Eic
C9	-	RKZ3.3B2KK	Zener diode	3.25..3.50V, Izt=5mA, Zzt=130Ω, 150mW	SFP	7d	1a	Ren
C9	-	RKZ3.3B2KL	Zener diode	3.25..3.50V, Izt=5mA, Zzt=130Ω, 100mW	EFP	7d	1a	Ren
C9.0	-	SMBJ-LC9.0	TVS	Vbr=10.8..13.0V, Vrwm=9.0V, 35.5A, 600W(1ms)	DO-214AA	1d	1a	Eic
C9.0	-	SMCG9.0	TVS	Vrwm=9V, 88.8A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C9.0A	-	SMBJ-LC9.0A	TVS	Vbr=10.8..11.9V, Vrwm=9.0V, 39.0A, 600W(1ms)	DO-214AA	1d	1a	Eic
C9.0A	-	SMCG9.0A	TVS	Vrwm=9V, 97.4A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C9.0A	-	SMCJ9.0A	TVS	Vrwm=9V, Vbr=10..11.5V, 97.4A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C9.0C	-	SMCG9.0C	TVS	Vrwm=9V, 88.8A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C9.0CA	-	SMCG9.0CA	TVS	Vrwm=9V, 97.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C9.0CA	-	SMCJ9.0CA	TVS	Vrwm=9V, Vbr=10..11.5V, 97.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C90	-	SMBJ-LC90	TVS	Vbr=100.8..122.8V, Vrwm=90V, 3.8A, 600W(1ms)	DO-214AA	1d	1a	Eic
C90	-	SMCG90	TVS	Vrwm=90V, 9.4A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C90A	-	SMBJ-LC90A	TVS	Vbr=100.8..111.8V, Vrwm=90V, 4.1A, 600W(1ms)	DO-214AA	1d	1a	Eic
C90A	-	SMCG90A	TVS	Vrwm=90V, 10.3A, 1500W(1ms)	DO-215AB	5d	1b	Msc
C90A	-	SMCJ90A	TVS	Vrwm=90V, Vbr=100..115.5V, 10.3A, 1500W(1mS)	DO-214AB	1d	1a	Msc
C90C	-	SMCG90C	TVS	Vrwm=90V, 9.4A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C90CA	-	SMCG90CA	TVS	Vrwm=90V, 10.3A, 1500W(1ms), Bidir.	DO-215AB	5ba	1e	Msc
C90CA	-	SMCJ90CA	TVS	Vrwm=90V, Vbr=100..115.5V, 10.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Msc
C91	-	BZG03-C91	Zener diode	91V±5%, Izt=5mA, Zzt=60Ω, 1.25W	DO-214AC	1d	1a	Eic
C91A	-	1.5SMC91A	TVS	Vrwm=77.8V, Vbr=86.5..95.5V, Ipp=12A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C91A	-	P6SMB91A	TVS	Vrwm=91V, Vbr=86.5..95.5V, 4.8A, 600W(1ms)	DO-214AA	1d	1a	Cen
C91C	-	1.5SMC91CA	TVS	Vrwm=77.8V, Vbr=86.5..95.5V, Ipp=12A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C91C	-	P6SMB91CA	TVS	Vrwm=91V, Vbr=86.5..95.5V, 4.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
C95	-	CMHD3595	Si-diode	Sw, 150V, 150mA, 400mW, Vf<1V(200mA), <8pF	SOD-123	5d	1a	Cen
C9A	-	1.5SCMJ15A	TVS	Vbr=V14.3..15.8V, Vrwm=12.8V, 20A, 1500W(1ms)	DO-214AB	1d	1a	Chm
C9C	-	1.5SCMJ15CA	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Chm
C9V1	-	SMA5C9V1	Zener diode	9.1V±5%, Izt=25mA, Zzt<5Ω, 3W	DO-214AC	1d	1a	Mco
C9V1A	-	1.5SMC9.1A	TVS	Vrwm=7.78V, Vbr=8.65..9.5V, Ipp=112A, 1500W(1ms)	DO-214AB	1d	1a	Cen
C9V1A	-	P6SMB9.1A	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 44.8A, 600W(1ms)	DO-214AA	1d	1a	Cen
C9V1C	-	1.5SMC9.1CA	TVS	Vrwm=7.78V, Vbr=8.65..9.5V, Ipp=112A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
C9V1C	-	P6SMB9.1CA	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 44.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CA	-	BZX384B5V6-V-G	Zener diode	5.6V±2.5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	2m	Vs
CA	-	LMSZ4691T1G	Zener diode	5.89..6.51V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
CA	-	MM1Z4692	Zener diode	6.46..7.14V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
CA	-	MMSZ4691	Zener diode	6.2V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
CA	-	MMSZ4691-F	Zener diode	5.89..6.51V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
CA	-	MMSZ4692	Zener diode	6.8V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
CA	-	SD883-02	Si-diode	SBD, Sw, 20V, 3A, Vf<0.3V(3A)	SD	7d	2r	Fji
CA	-	ZMV829B	C-diode	VHF/UHF-tuning, 25V, 330mW, 8.2pF(2V), ΔC=±5%	SOD-323	5d	1a	Zx
CAD	-	SMCJ5.0	TVS	Vbr=6.40..7.82V, Vrwm=5.0V, 156.3A, 1500W(1ms)	DO-214AB	1d	1a	Gal

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CAE	-	SMCJ5.0A	TVS	Vbr=6.40..7.07V, Vrwm=5.0V, 163.0A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAF	-	SMCJ6.0	TVS	Vbr=6.67..8.15V, Vrwm=5.0V, 131.6A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAG	-	SMCJ6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 145.6A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAH	-	SMCJ6.5	TVS	Vbr=7.22..8.82V, Vrwm=6.5V, 122.0A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAK	-	SMCJ6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 133.9A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAL	-	SMCJ7.0	TVS	Vbr=7.78..9.51V, Vrwm=7.0V, 112.8A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAM	-	SMCJ7.0A	TVS	Vbr=7.78..8.60V, Vrwm=7.0V, 125.0A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAN	-	SMCJ7.5	TVS	Vbr=8.33..10.2V, Vrwm=7.5V, 104.9A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAP	-	SMCJ7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 116.3A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAQ	-	SMCJ8.0	TVS	Vbr=8.89..10.9V, Vrwm=8.0V, 100.0A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAR	-	SMCJ8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 110.3A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAS	-	SMCJ8.5	TVS	Vbr=9.44..11.5V, Vrwm=8.5V, 94.3A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAT	-	SMCJ8.5A	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 104.2A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAU	-	SMCJ9.0	TVS	Vbr=10.0..12.2V, Vrwm=9.0V, 88.8A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAV	-	SMCJ9.0A	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 97.4A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAW	-	SMCJ10	TVS	Vbr=11.1..13.6V, Vrwm=10V, 79.8A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAX	-	SMCJ10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, 88.2A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAY	-	SMCJ11	TVS	Vbr=12.2..14.9V, Vrwm=11V, 74.6A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CAZ	-	SMCJ11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, 82.4A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CB	-	BZX384B6V2-V-G	Zener diode	6.2V±2.5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	2m	Vs
CB	-	MM1Z4693	Zener diode	7.13..7.88V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
CB	-	MMSZ4693	Zener diode	7.5V±5%, Izt=50μA, 500mW	SOD-123	5d	1a	Eic
CB	-	SD883-04	Si-diode	SBD, Sw, 40V, 3A, Vf<0.45V(3A)	SD	7d	2r	Fji
CB	-	ZMV830B	C-diode	VHF/UHF-tuning, 25V, 330mW, 10pF(2V), ΔC=±5%	SOD-323	5d	1a	Zx
CBD	-	SMCJ12	TVS	Vbr=13.3..16.3V, Vrwm=12V, 68.2A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBDE	-	1SMC5.0CA	TVS	Vbr=6.40..7.07V, Vrwm=5.0V, 163.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBDG	-	1SMC6.0CA	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 145.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBDK	-	1SMC6.5CA	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 133.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBDM	-	1SMC7.0CA	TVS	Vbr=7.78..8.6V, Vrwm=7.0V, 125.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBDP	-	1SMC7.5CA	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 116.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBDR	-	1SMC8.0CA	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 110.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBDT	-	1SMC8.5CA	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 104.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBDV	-	1SMC9.0CA	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 97.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBDX	-	1SMC10CA	TVS	Vbr=11.1..12.3V, Vrwm=10V, 88.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBDZ	-	1SMC11CA	TVS	Vbr=12.2..13.5V, Vrwm=11V, 82.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBE	-	SMCJ12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, 75.4A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBEE	-	1SMC12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, 75.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBEG	-	1SMC13CA	TVS	Vbr=14.4..15.9V, Vrwm=13V, 69.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBEK	-	1SMC14CA	TVS	Vbr=15.6..17.2V, Vrwm=14V, 64.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBEM	-	1SMC15CA	TVS	Vbr=16.7..18.5V, Vrwm=15V, 61.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBEP	-	1SMC16CA	TVS	Vbr=17.8..19.7V, Vrwm=16V, 57.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBER	-	1SMC17CA	TVS	Vbr=18.9..20.9V, Vrwm=17V, 54.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBET	-	1SMC18CA	TVS	Vbr=20.0..22.1V, Vrwm=18V, 51.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBEV	-	1SMC20CA	TVS	Vbr=22.2..24.5V, Vrwm=20V, 46.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBEX	-	1SMC22CA	TVS	Vbr=24.4..26.9V, Vrwm=22V, 42.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBEZ	-	1SMC24CA	TVS	Vbr=26.7..29.5V, Vrwm=24V, 38.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBF	-	SMCJ13	TVS	Vbr=14.4..17.6V, Vrwm=13V, 63.0A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBFE	-	1SMC26CA	TVS	Vbr=28.9..31.9V, Vrwm=26V, 35.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBFG	-	1SMC28CA	TVS	Vbr=31.1..34.4V, Vrwm=28V, 33.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBFK	-	1SMC30CA	TVS	Vbr=33.3..36.8V, Vrwm=30V, 31.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBFM	-	1SMC33CA	TVS	Vbr=36.7..40.6V, Vrwm=33V, 28.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBFP	-	1SMC36CA	TVS	Vbr=40.0..44.2V, Vrwm=36V, 25.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBFR	-	1SMC40CA	TVS	Vbr=44.4..49.1V, Vrwm=40V, 23.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBFT	-	1SMC43CA	TVS	Vbr=47.8..52.8V, Vrwm=43V, 21.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBFV	-	1SMC45CA	TVS	Vbr=50.0..55.3V, Vrwm=45V, 20.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBFX	-	1SMC48CA	TVS	Vbr=53.3..58.9V, Vrwm=48V, 19.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBFX	-	1SMC51CA	TVS	Vbr=56.7..62.7V, Vrwm=51V, 18.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBG	-	SMCJ13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, 69.8A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBGE	-	1SMC54CA	TVS	Vbr=60.0..66.3V, Vrwm=54V, 17.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBGG	-	1SMC58CA	TVS	Vbr=64.4..71.2V, Vrwm=58V, 16.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBGK	-	1SMC60CA	TVS	Vbr=66.7..73.7V, Vrwm=60V, 15.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBGM	-	1SMC64CA	TVS	Vbr=71.1..78.6V, Vrwm=64V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBGP	-	1SMC70CA	TVS	Vbr=77.8..86V, Vrwm=70V, 13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBGR	-	1SMC75CA	TVS	Vbr=83.3..92.1V, Vrwm=75V, 12.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBGT	-	1SMC78CA	TVS	Vbr=86.7..95.8V, Vrwm=78V, 11.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBGV	-	1SMC85CA	TVS	Vbr=94.4..104V, Vrwm=85V, 10.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBGX	-	1SMC90CA	TVS	Vbr=100..111V, Vrwm=90V, 10.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBGZ	-	1SMC100CA	TVS	Vbr=111..123V, Vrwm=100V, 9.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBH	-	SMBJ22CA	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
CBH	-	SMCJ14	TVS	Vbr=15.6..19.1V, Vrwm=14V, 58.1A, 1500W(1ms)	DO-214AB	1d	1a	Gal

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CBHE	-	1SMC110CA	TVS	Vbr=122..135V, Vrwm=110V, 8.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBHG	-	1SMC120CA	TVS	Vbr=133..147V, Vrwm=120V, 7.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBHK	-	1SMC130CA	TVS	Vbr=144..159V, Vrwm=130V, 7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBHM	-	1SMC150CA	TVS	Vbr=167..185V, Vrwm=150V, 6.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBHP	-	1SMC160CA	TVS	Vbr=178..197V, Vrwm=160V, 5.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBHR	-	1SMC170CA	TVS	Vbr=189..209V, Vrwm=170V, 5.50A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CBJ	-	SMBJ40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
CBK	-	SMCJ14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, 64.7A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBL	-	SMCJ15	TVS	Vbr=16.7..20.4V, Vrwm=15V, 55.8A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBM	-	SMBJ70CA	TVS	Vrwm=70V, Vbr=77.8..89.5V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
CBM	-	SMCJ15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, 61.5A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBN	-	SMCJ16	TVS	Vbr=17.8..21.8V, Vrwm=16V, 52.1A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBP	-	SMCJ16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, 57.7A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBQ	-	SMBJ100CA	TVS	Vrwm=100V, Vbr=111..128V, 3.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
CBQ	-	SMCJ17	TVS	Vbr=18.9..23.1V, Vrwm=17V, 49.2A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBR	-	SMCJ17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, 54.3A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBS	-	SMCJ18	TVS	Vbr=20.0..24.4V, Vrwm=18V, 46.6A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBT	-	SMCJ18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, 51.4A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBU	-	SMCJ20	TVS	Vbr=22.2..27.1V, Vrwm=20V, 41.9A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBV	-	SMCJ20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, 46.3A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBW	-	SMCJ22	TVS	Vbr=24.4..29.8V, Vrwm=22V, 38.1A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBX	-	SMCJ22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, 42.3A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBY	-	SMCJ24	TVS	Vbr=26.7..32.6V, Vrwm=24V, 34.9A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CBZ	-	SMCJ24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, 38.6A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CC	-	BB565	C-diode	UHF TV-tuning, 30V, 20mA, 2.2..21.5pF(28..1V)	SCD-80	6d	1u	Inf
CC	-	BZX384B6V8-V-G	Zener diode	6.8V±2.5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	2m	Vs
CC	-	GBLC03CI	TVS	Vrwm=3V, 5A, 350W(1ms), 0.6pF, Bidir.	SOD-323	5ba	1e	Prt
CC	-	LMSZ4678T1G	Zener diode	1.71..1.89V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
CC	-	MM1Z4694	Zener diode	7.79..8.61V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
CC	-	MMSZ4678	Zener diode	1.8V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
CC	-	MMSZ4694	Zener diode	8.2V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
CC	-	SD882-02-TE12R	Si-diode	SBD, Sw, 20V, 2A, Vf<0.39V(2A)	SD	7d	2p	Fji
CC	-	ZMV831B	C-diode	VHF/UHF-tuning, 25V, 330mW, 15pF(2V), ΔC=±5%	SOD-323	5d	1a	Zx
CC1	-	CMHZ5221B	Zener diode	2.4V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CC2	-	CMHZ5222B	Zener diode	2.5V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CC3	-	CMHZ5223B	Zener diode	2.7V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CC4	-	CMHZ5224B	Zener diode	2.8V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CC5	-	CMHZ5225B	Zener diode	3.0V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CCA	-	CMHZ4691	Zener diode	LN, 6.2V±5%, 45.0mA, 400mW	SOD-123	5d	1a	Cen
CCC	-	CMHZ4678	Zener diode	LN, 1.8V±5%, 120.0mA, 400mW	SOD-123	5d	1a	Cen
CCD	-	CMHZ4679	Zener diode	LN, 2.0V±5%, 110.0mA, 400mW	SOD-123	5d	1a	Cen
CCD	-	SMCJ26	TVS	Vbr=28.9..35.3V, Vrwm=26V, 32.2A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCE	-	CMHZ4680	Zener diode	LN, 2.2V±5%, 100.0mA, 400mW	SOD-123	5d	1a	Cen
CCE	-	SMCJ26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, 35.6A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCF	-	CMHZ4681	Zener diode	LN, 2.4V±5%, 95.0mA, 400mW	SOD-123	5d	1a	Cen
CCF	-	SMCJ28	TVS	Vbr=31.1..38.0V, Vrwm=28V, 30.0A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCG	-	SMCJ28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, 33.0A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCH	-	CMHZ4682	Zener diode	LN, 2.7V±5%, 90.0mA, 400mW	SOD-123	5d	1a	Cen
CCH	-	SMCJ30	TVS	Vbr=33.3..40.7V, Vrwm=30V, 28.0A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCJ	-	CMHZ4683	Zener diode	LN, 3.0V±5%, 85.0mA, 400mW	SOD-123	5d	1a	Cen
CCK	-	CMHZ4684	Zener diode	LN, 3.3V±5%, 80.0mA, 400mW	SOD-123	5d	1a	Cen
CCK	-	SMCJ30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, 31.0A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCL	-	SMCJ33	TVS	Vbr=36.7..44.9V, Vrwm=33V, 25.4A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCM	-	CMHZ4685	Zener diode	LN, 3.6V±5%, 75.0mA, 400mW	SOD-123	5d	1a	Cen
CCM	-	SMCJ33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, 28.1A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCN	-	CMHZ4686	Zener diode	LN, 3.9V±5%, 70.0mA, 400mW	SOD-123	5d	1a	Cen
CCN	-	SMCJ36	TVS	Vbr=40.0..48.9V, Vrwm=36V, 23.3A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCP	-	CMHZ4687	Zener diode	LN, 4.3V±5%, 65.0mA, 400mW	SOD-123	5d	1a	Cen
CCP	-	SMCJ36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, 25.8A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCQ	-	SMCJ40	TVS	Vbr=44.4..54.3V, Vrwm=40V, 21.0A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCR	-	SMCJ40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, 23.3A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCS	-	SMCJ43	TVS	Vbr=47.8..58.4V, Vrwm=43V, 19.6A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCT	-	CMHZ4688	Zener diode	LN, 4.7V±5%, 60.0mA, 400mW	SOD-123	5d	1a	Cen
CCT	-	SMCJ43A	TVS	Vbr=47.8..52.8V, Vrwm=43V, 21.6A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCU	-	CMHZ4689	Zener diode	LN, 5.1V±5%, 55.0mA, 400mW	SOD-123	5d	1a	Cen
CCU	-	SMCJ45	TVS	Vbr=50.0..61.1V, Vrwm=45V, 18.7A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCV	-	CMHZ4690	Zener diode	LN, 5.6V±5%, 50.0mA, 400mW	SOD-123	5d	1a	Cen
CCV	-	SMCJ45A	TVS	Vbr=50.0..55.3V, Vrwm=45V, 20.6A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCW	-	SMCJ48	TVS	Vbr=53.3..65.1V, Vrwm=48V, 17.5A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCX	-	CMHZ4692	Zener diode	LN, 6.8V±5%, 35.0mA, 400mW	SOD-123	5d	1a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CCX	-	SMCJ48A	TVS	Vbr=53.3..58.9V, Vrwm=48V, 19.4A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCY	-	CMHZ4693	Zener diode	LN, 7.5V±5%, 31.8mA, 400mW	SOD-123	5d	1a	Cen
CCY	-	SMCJ51	TVS	Vbr=56.7..69.3V, Vrwm=51V, 16.5A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CCZ	-	CMHZ4694	Zener diode	LN, 8.2V±5%, 29.0mA, 400mW	SOD-123	5d	1a	Cen
CCZ	-	SMCJ51A	TVS	Vbr=56.7..62.7V, Vrwm=51V, 18.2A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CD	-	BZX384B7V5-V-G	Zener diode	7.5V±2.5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	2m	Vs
CD	-	KDZ24B	Zener diode	24V±2.5%, 10mA, 1W	PMDU	7d	1s	Rhm
CD	-	LMSZ4679T1G	Zener diode	1.9..2.1V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
CD	-	MM1Z4695	Zener diode	8.27..9.14V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
CD	-	MMSZ4679	Zener diode	2.0V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
CD	-	MMSZ4695	Zener diode	8.7V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
CD	-	P4SMA47	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.5A, 400W(1ms)	DO-214AC	1d	2j	Fag
CD	-	P4SMAJ26	TVS	Vrwm=26V, 8.6A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CD	-	P6SMBJ26C	TVS	Vrwm=26V, Vbr=28.9..36.6V, 12.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CD	-	SMAJ26	TVS	Vrwm=26V, Vbr=28.9..35.3V, 8.6A, 400W(1ms)	DO-214AC	1d	1k	Vs
CD	-	SMBG26C	TVS	Vrwm=26V, Vbr=28.9..36.6V, 12.4A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CD	-	SMBJ26C	TVS	Vrwm=26V, Vbr=28.9..36.6V, 12.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CD	-	SMP26	TVS	Vbr=28.9..35.3V, Vrwm=26V, Ipp=8.6A, 400W(1ms)	DO-220AA	8d	1a	Vs
CD	-	TV04A260K-G	TVS	Vrwm=26.0V, Vbr=28.90..35.30V, Ipp=8.58A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CD	-	TV06B260KB-G	TVS	Vrwm=26.0V, Vbr=28.90..35.30V, Ipp=12.88A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
CD	-	ZMV832B	C-diode	VHF/UHF-tuning, 25V, 330mW, 22pF(2V), ΔC=±5%	SOD-323	5d	1a	Zx
CD1	-	CMHZ5226B	Zener diode	3.3V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CD2	-	CMHZ5227B	Zener diode	3.6V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CD3	-	CMHZ5228B	Zener diode	3.9V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CD4	-	CMHZ5229B	Zener diode	4.3V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CD5	-	CMHZ5230B	Zener diode	4.7V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CDA	-	CMHZ4708	Zener diode	LN, 22V±5%, 10.8mA, 400mW	SOD-123	5d	1a	Cen
CDC	-	CMHZ4695	Zener diode	LN, 8.7V±5%, 27.4mA, 400mW	SOD-123	5d	1a	Cen
CDD	-	CMHZ4696	Zener diode	LN, 9.1V±5%, 26.2mA, 400mW	SOD-123	5d	1a	Cen
CDE	-	CMHZ4697	Zener diode	LN, 10V±5%, 24.8mA, 400mW	SOD-123	5d	1a	Cen
CDF	-	CMHZ4698	Zener diode	LN, 11V±5%, 21.6mA, 400mW	SOD-123	5d	1a	Cen
CDH	-	CMHZ4699	Zener diode	LN, 12V±5%, 20.4mA, 400mW	SOD-123	5d	1a	Cen
CDJ	-	CMHZ4700	Zener diode	LN, 13V±5%, 19.0mA, 400mW	SOD-123	5d	1a	Cen
CDJ	-	P4SMA47	TVS	Vbr=42.3..51.7V, Vrwm=38.1V, 6.2A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CDK	-	CMHZ4701	Zener diode	LN, 14V±5%, 17.5mA, 400mW	SOD-123	5d	1a	Cen
CDK	-	SMA47	TVS	Vbr=42.3..51.7V, Vrwm=38.1V, 5.90A, 400W(1ms)	DO-214AC	1d	1a	Lge
CDM	-	CMHZ4702	Zener diode	LN, 15V±5%, 16.3mA, 400mW	SOD-123	5d	1a	Cen
CDM	-	SMA47C	TVS	Vbr=42.3..51.7V, Vrwm=38.1V, 5.90A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CDN	-	CMHZ4703	Zener diode	LN, 16V±5%, 15.4mA, 400mW	SOD-123	5d	1a	Cen
CDP	-	CMHZ4704	Zener diode	LN, 17V±5%, 14.5mA, 400mW	SOD-123	5d	1a	Cen
CDP	-	SMAJ26C	TVS	Vrwm=26V, Vbr=28.9..35.3V, 8.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CDT	-	CMHZ4705	Zener diode	LN, 18V±5%, 13.2mA, 400mW	SOD-123	5d	1a	Cen
CDU	-	CMHZ4706	Zener diode	LN, 19V±5%, 12.5mA, 400mW	SOD-123	5d	1a	Cen
CDV	-	CMHZ4707	Zener diode	LN, 20V±5%, 11.9mA, 400mW	SOD-123	5d	1a	Cen
CDY	-	CMHZ4710	Zener diode	LN, 25V±5%, 9.5mA, 400mW	SOD-123	5d	1a	Cen
CDZ	-	CMHZ4709	Zener diode	LN, 24V±5%, 9.9mA, 400mW	SOD-123	5d	1a	Cen
CE	-	BZX384B8V2-V-G	Zener diode	8.2V±2.5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	2m	Vs
CE	-	CD214B-T26CA	TVS	Vrwm=26V, Irsm=14.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
CE	-	LMSZ4680T1G	Zener diode	2.09..2.31V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
CE	-	MM1Z4696	Zener diode	8.65..9.56V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
CE	-	MMSZ4680	Zener diode	2.2V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
CE	-	MMSZ4696	Zener diode	9.1V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
CE	-	P4SMA47A	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.5A, 400W(1ms)	DO-214AC	1d	2j	Fag
CE	-	P4SMAJ26A	TVS	Vrwm=26V, 9.5A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CE	-	P6SMBJ26CA	TVS	Vrwm=26V, Vbr=28.9..36.6V, 14.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CE	-	PMF26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, Ipp=4.75A, 200W(1ms)	SOD-123FL	7d	1a	Shp
CE	-	SMA6L26A	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, 14.3A, 600W(1ms)	DO-221AC	7d	2s	Lif
CE	-	SMAJ26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, 9.5A, 400W(1ms)	DO-214AC	1d	1k	Vs
CE	-	SMBG26CA	TVS	Vrwm=26V, Vbr=28.9..33.2V, 14.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CE	-	SMBJ26CA	TVS	Vrwm=26V, Vbr=28.9..33.2V, 14.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CE	-	SMBJ26CA	TVS	Vrwm=26V, Vbr=28.9..33.2V, 14.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
CE	-	SMF26A	ESDP-diode	Vbr=28.9V, Vrwm=26V, Ipp=4.8A, 200W(1ms)	SMF	7d	2y	Vs
CE	-	SMF26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, Ipp=4.8A, 200W(1ms)	SMF	1d	2sa	Lif
CE	-	SMP26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, Ipp=9.5A, 400W(1ms)	DO-220AA	8d	1a	Vs
CE	-	TV04A260J-G	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=9.50A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CE	-	TV06B260JB-G	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=14.25A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
CE	-	ZMV833B	C-diode	VHF/UHF-tuning, 25V, 330mW, 33pF(2V), ΔC=±5%	SOD-323	5d	1a	Zx
CE1	-	CMHZ5231B	Zener diode	5.1V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CE2	-	CMHZ5232B	Zener diode	5.6V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CE3	-	CMHZ5233B	Zener diode	6.0V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CE4	-	CMHZ5234B	Zener diode	6.2V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CE5	-	CMHZ5235B	Zener diode	6.8V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CE7	-	SM6T30CA	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, 14.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CEA	-	CMHZ4711	Zener diode	LN, 27V±5%, 8.8mA, 400mW	SOD-123	5d	1a	Cen
CEA	-	TPSMA6L26A	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=14.3A, 600W(1ms)	DO-221AC	1d	2s	Lif
CEC	-	CMHZ4712	Zener diode	LN, 28V±5%, 8.5mA, 400mW	SOD-123	5d	1a	Cen
CED	-	CMHZ4713	Zener diode	LN, 30V±5%, 7.9mA, 400mW	SOD-123	5d	1a	Cen
CEE	-	CMHZ4714	Zener diode	LN, 33V±5%, 7.2mA, 400mW	SOD-123	5d	1a	Cen
CEF	-	CMHZ4715	Zener diode	LN, 36V±5%, 6.6mA, 400mW	SOD-123	5d	1a	Cen
CEH	-	CMHZ4716	Zener diode	LN, 39V±5%, 6.1mA, 400mW	SOD-123	5d	1a	Cen
CEJ	-	CMHZ4717	Zener diode	LN, 43V±5%, 5.5mA, 400mW	SOD-123	5d	1a	Cen
CEJ	-	P4SMA47A	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.5A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CEK	-	SMA47A	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.17A, 400W(1ms)	DO-214AC	1d	1a	Lge
CEM	-	SMA47CA	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.17A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CEP	-	SMAJ26CA	TVS	Vrwm=26V, Vbr=28.9..31.9V, 9.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CF	-	BZX384B9V1-V-G	Zener diode	9.1V±2.5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	2m	Vs
CF	-	LMSZ4681T1G	Zener diode	2.28..2.52V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
CF	-	MAZD056	Zener diode	5.3..6V, Zzt=40Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
CF	-	MM1Z4697	Zener diode	9.50..10.50V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
CF	-	MMSZ4681	Zener diode	2.4V±5%, Izt=50μA, 500mW	SOD-123	5d	1u	Ons
CF	-	MMSZ4697	Zener diode	10V±5%, Izt=50μA, 500mW	SOD-123	5d	1a	Eic
CF	-	P4SMA51	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
CF	-	P4SMAJ28	TVS	Vrwm=28V, 8A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CF	-	P6SMBJ28C	TVS	Vrwm=28V, Vbr=31.1..39.4V, 12A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CF	-	SMAJ28	TVS	Vrwm=28V, Vbr=31.1..38.0V, 8A, 400W(1ms)	DO-214AC	1d	1k	Vs
CF	-	SMBG28C	TVS	Vrwm=28V, Vbr=31.1..39.4V, 12.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CF	-	SMBJ28C	TVS	Vrwm=28V, Vbr=31.1..39.4V, 12.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CF	-	SMP28	TVS	Vbr=31.1..38.0V, Vrwm=28V, Ipp=8.0A, 400W(1ms)	DO-220AA	8d	1a	Vs
CF	-	TV04A280K-G	TVS	Vrwm=28.0V, Vbr=31.10..38.0V, Ipp=8.0A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CF	-	TV06B280KB-G	TVS	Vrwm=28.0V, Vbr=31.10..38.0V, Ipp=12.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
CF	-	ZMV834B	C-diode	VHF/UHF-tuning, 25V, 330mW, 47pF(2V), ΔC=±5%	SOD-323	5d	1a	Zx
CF02M	-	CMR1F-02M	Si-diode	Rectifer, Fast-Recov, 00V, 1A, Vf<1.3V(1A), <150ns	DO-214AC	1d	1a	Cen
CF04M	-	CMR1F-04M	Si-diode	Rectifier, Fast-Recovery, 400V, 1A, Vf<1.3V(1A), <150ns	DO-214AC	1d	1a	Cen
CF06M	-	CMR1F-06M	Si-diode	Rectifer, Fast-Recov, 600V, 1A, Vf<1.3V(1A), <150ns	DO-214AC	1d	1a	Cen
CF1	-	CMHZ5236B	Zener diode	7.5V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CF10M	-	CMR1F-10M	Si-diode	Rectifer, Fast-Recov, 1000V, 1A, Vf<1.3V(1A), <150ns	DO-214AC	1d	1a	Cen
CF2	-	CMHZ5237B	Zener diode	8.2V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CF3	-	CMHZ5238B	Zener diode	8.7V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CF4	-	CMHZ5239B	Zener diode	9.1V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CF5	-	CMHZ5240B	Zener diode	10V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CFJ	-	P4SMA51	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 5.7A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CFK	-	SMA51	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 5.44A, 400W(1ms)	DO-214AC	1d	1a	Lge
CFM	-	SMA45C	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 5.44A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CFP	-	SMAJ28C	TVS	Vrwm=28V, Vbr=31.1..38.0V, 8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CG	-	BZX384B10-V-G	Zener diode	10V±2.5%, Izt=5mA, Zzt=8Ω, 200mW	SOD-323	5d	2m	Vs
CG	-	CD214B-T28CA	TVS	Vrwm=28V, Irsm=13.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
CG	-	P4SMA51A	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
CG	-	P4SMAJ28A	TVS	Vrwm=28V, 8.8A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CG	-	P6SMBJ28CA	TVS	Vrwm=28V, Vbr=31.1..39.4V, 13.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CG	-	PMF28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, Ipp=4.41A, 200W(1ms)	SOD-123FL	7d	1a	Shp
CG	-	SMA6L28A	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, 13.3A, 600W(1ms)	DO-221AC	7d	2s	Lif
CG	-	SMAJ28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, 8.8A, 400W(1ms)	DO-214AC	1d	1q	Ste
CG	-	SMAJ28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, 8.8A, 400W(1ms)	DO-214AC	1d	1k	Vs
CG	-	SMBG28CA	TVS	Vrwm=28V, Vbr=31.1..35.8V, 13.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CG	-	SMBJ28CA	TVS	Vrwm=28V, Vbr=31.1..35.8V, 13.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
CG	-	SMBJ28CA	TVS	Vrwm=28V, Vbr=31.1..35.8V, 13.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CG	-	SMF28A	ESDP-diode	Vbr=31.1V, Vrwm=28V, Ipp=4.4A, 200W(1ms)	SMF	7d	2y	Vs
CG	-	SMF28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, Ipp=4.4A, 200W(1ms)	SMF	1d	2sa	Lif
CG	-	SMP28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, Ipp=8.8A, 400W(1ms)	DO-220AA	8d	1a	Vs
CG	-	TV04A280J-G	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=8.81A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CG	-	TV06B280JB-G	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=13.22A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
CG	-	ZMV835B	C-diode	VHF/UHF-tuning, 25V, 330mW, 68pF(2V), ΔC=±5%	SOD-323	5d	1a	Zx
CGA	-	TPSMA6L28A	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=13.3A, 600W(1ms)	DO-221AC	1d	2s	Lif
CGDE	-	1SMC5.0A	TVS	Vbr=6.40..7.07V, Vrwm=5.0V, 163.0A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGDG	-	1SMC6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 145.6A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGDK	-	1SMC6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 133.9A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGDM	-	1SMC7.0A	TVS	Vbr=7.78..8.6V, Vrwm=7.0V, 125.0A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGDP	-	1SMC7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 116.3A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGDR	-	1SMC8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 110.3A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGDT	-	1SMC8.5A	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 104.2A, 1500W(1ms)	DO-214AB	1d	1a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CGDV	-	1SMC9.0A	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 97.4A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGDX	-	1SMC10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, 88.2A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGDZ	-	1SMC11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, 82.4A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGEE	-	1SMC12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, 75.4A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGEG	-	1SMC13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, 69.8A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGEK	-	1SMC14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, 64.7A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGEM	-	1SMC15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, 61.5A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGEP	-	1SMC16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, 57.7A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGER	-	1SMC17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, 54.3A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGET	-	1SMC18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, 51.4A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGEV	-	1SMC20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, 46.3A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGEX	-	1SMC22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, 42.3A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGEZ	-	1SMC24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, 38.6A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGFE	-	1SMC26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, 35.6A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGFG	-	1SMC28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, 33.0A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGFK	-	1SMC30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, 31.0A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGFM	-	1SMC33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, 28.1A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGFP	-	1SMC36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, 25.8A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGFR	-	1SMC40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, 23.3A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGFT	-	1SMC43A	TVS	Vbr=47.8..52.8V, Vrwm=43V, 21.6A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGFV	-	1SMC45A	TVS	Vbr=50.0..55.3V, Vrwm=45V, 20.6A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGFX	-	1SMC48A	TVS	Vbr=53.3..58.9V, Vrwm=48V, 19.4A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGFX	-	1SMC51A	TVS	Vbr=56.7..62.7V, Vrwm=51V, 18.2A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGGE	-	1SMC54A	TVS	Vbr=60.0..66.3V, Vrwm=54V, 17.2A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGGG	-	1SMC58A	TVS	Vbr=64.4..71.2V, Vrwm=58V, 16.0A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGGK	-	1SMC60A	TVS	Vbr=66.7..73.7V, Vrwm=60V, 15.5A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGGM	-	1SMC64A	TVS	Vbr=71.1..78.6V, Vrwm=64V, 14.6A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGGP	-	1SMC70A	TVS	Vbr=77.8..86V, Vrwm=70V, 13.3A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGGR	-	1SMC75A	TVS	Vbr=83.3..92.1V, Vrwm=75V, 12.4A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGGT	-	1SMC78A	TVS	Vbr=86.7..95.8V, Vrwm=78V, 11.9A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGGV	-	1SMC85A	TVS	Vbr=94.4..104V, Vrwm=85V, 10.9A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGGX	-	1SMC90A	TVS	Vbr=100..111V, Vrwm=90V, 10.3A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGGZ	-	1SMC100A	TVS	Vbr=111..123V, Vrwm=100V, 9.3A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGHE	-	1SMC110A	TVS	Vbr=122..135V, Vrwm=110V, 8.5A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGHG	-	1SMC120A	TVS	Vbr=133..147V, Vrwm=120V, 7.8A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGHK	-	1SMC130A	TVS	Vbr=144..159V, Vrwm=130V, 7.2A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGHM	-	1SMC150A	TVS	Vbr=167..185V, Vrwm=150V, 6.2A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGHP	-	1SMC160A	TVS	Vbr=178..197V, Vrwm=160V, 5.8A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGHR	-	1SMC170A	TVS	Vbr=189..209V, Vrwm=170V, 5.50A, 1500W(1ms)	DO-214AB	1d	1a	Cen
CGJ	-	P4SMA51A	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CGK	-	SMA51A	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 5.71A, 400W(1ms)	DO-214AC	1d	1a	Lge
CGM	-	SMA45CA	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 5.71A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CGP	-	SMAJ28CA	TVS	Vrwm=28V, Vbr=31.1..34.4V, 8.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CH	-	BZX384B11-V-G	Zener diode	11V±2.5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
CH	-	LMSZ4682T1G	Zener diode	2.565..2.835V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
CH	-	MM1Z4698	Zener diode	10.45..11.50V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
CH	-	MMSZ4682	Zener diode	2.7V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
CH	-	MMSZ4698	Zener diode	11V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
CH	-	NZH3V0B	Zener diode	3.0V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
CH	-	P4SMA56	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 400W(1ms)	DO-214AC	1d	2j	Fag
CH	-	P4SMAJ30	TVS	Vrwm=30V, 7.5A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CH	-	P6SMBJ30C	TVS	Vrwm=30V, Vbr=27..33V, 11.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CH	-	SMAJ28CA	TVS	Vrwm=28V, Vbr=31.1..34.4V, 8.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
CH	-	SMAJ30	TVS	Vrwm=30V, Vbr=33.3..40.7V, 7.5A, 400W(1ms)	DO-214AC	1d	1k	Vs
CH	-	SMBG30C	TVS	Vrwm=30V, Vbr=33.3..42.2V, 11.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CH	-	SMBJ30C	TVS	Vrwm=30V, Vbr=33.3..42.2V, 11.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CH	-	SMP30	TVS	Vbr=33.3..40.7V, Vrwm=30V, Ipp=7.5A, 400W(1ms)	DO-220AA	8d	1a	Vs
CH	-	TV04A300K-G	TVS	Vrwm=30.0V, Vbr=33.30..40.70V, Ipp=7.48A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CH	-	TV06B300KB-G	TVS	Vrwm=30.0V, Vbr=33.30..40.70V, Ipp=11.21A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
CH1	-	CMHZ5241B	Zener diode	11V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CH2	-	CMHZ5242B	Zener diode	12V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CH3	-	CMHSH-3	Si-diode	HS, Sw, 30V, 200mA, 150mW, Vf<0.5V(100mA), 10pF	SOD-123	5d	1a	Cen
CH3	-	CMHZ5243B	Zener diode	13V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CH4	-	CMHZ5244B	Zener diode	14V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CH5	-	CMHZ5245B	Zener diode	15V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CHA	-	CMHZ4627	Zener diode	LN, 6.2V±5%, 45mA, 500mW	SOD-123	5d	1a	Cen
CHC	-	CMHZ4614	Zener diode	LN, 1.8V±5%, 120mA, 500mW	SOD-123	5d	1a	Cen
CHD	-	CMHZ4615	Zener diode	LN, 2.0V±5%, 110mA, 500mW	SOD-123	5d	1a	Cen
CHDE	-	3SMC5.0A	TVS	Vrwm=5.0V, 326.0A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHDG	-	3SMC6.0A	TVS	Vrwm=6.0V, 291.3A, 3000W(1ms)	DO-214AB	1d	1a	Cen



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CHDK	-	3SMC6.5A	TVS	Vrwm=6.5V, 267.9A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHDM	-	3SMC7.0A	TVS	Vrwm=7.0V, 250.0A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHDP	-	3SMC7.5A	TVS	Vrwm=7.5V, 232.6A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHDR	-	3SMC8.0A	TVS	Vrwm=8.0V, 220.6A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHDT	-	3SMC8.5A	TVS	Vrwm=8.5V, 208.4A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHDV	-	3SMC9.0A	TVS	Vrwm=9.0V, 194.8A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHDX	-	3SMC10A	TVS	Vrwm=10V, 176.4A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHDZ	-	3SMC11A	TVS	Vrwm=11V, 184.8A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHE	-	CMHZ4616	Zener diode	LN, 2.2V±5%, 100mA, 500mW	SOD-123	5d	1a	Cen
CHEE	-	3SMC12A	TVS	Vrwm=12V, 150.6A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHEG	-	3SMC13A	TVS	Vrwm=13V, 139.4A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHEK	-	3SMC14A	TVS	Vrwm=14V, 129.4A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHEM	-	3SMC15A	TVS	Vrwm=15V, 123.0A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHEP	-	3SMC16A	TVS	Vrwm=16V, 115.4A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHER	-	3SMC17A	TVS	Vrwm=17V, 106.6A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHET	-	3SMC18A	TVS	Vrwm=18V, 102.8A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHEV	-	3SMC20A	TVS	Vrwm=20V, 92.6A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHEX	-	3SMC22A	TVS	Vrwm=22V, 84.4A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHEZ	-	3SMC24A	TVS	Vrwm=24V, 77.2A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHF	-	CMHZ4617	Zener diode	LN, 2.4V±5%, 95mA, 500mW	SOD-123	5d	1a	Cen
CHFE	-	3SMC26A	TVS	Vrwm=26V, 71.2A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHFG	-	3SMC28A	TVS	Vrwm=28V, 66.0A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHFK	-	3SMC30A	TVS	Vrwm=30V, 62.0A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHFM	-	3SMC33A	TVS	Vrwm=33V, 56.2A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHFP	-	3SMC36A	TVS	Vrwm=36V, 51.6A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHFR	-	3SMC40A	TVS	Vrwm=40V, 46.4A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHFT	-	3SMC43A	TVS	Vrwm=43V, 43.2A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHFV	-	3SMC45A	TVS	Vrwm=45V, 41.2A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHFX	-	3SMC48A	TVS	Vrwm=48V, 38.8A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHFZ	-	3SMC51A	TVS	Vrwm=51V, 36.4A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHGE	-	3SMC54A	TVS	Vrwm=54V, 34.4A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHGG	-	3SMC58A	TVS	Vrwm=58V, 32.0A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHGK	-	3SMC60A	TVS	Vrwm=60V, 31.0A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHGM	-	3SMC64A	TVS	Vrwm=64V, 29.2A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHGP	-	3SMC70A	TVS	Vrwm=70V, 26.6A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHGR	-	3SMC75A	TVS	Vrwm=75V, 24.8A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHGT	-	3SMC78A	TVS	Vrwm=78V, 22.8A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHGV	-	3SMC85A	TVS	Vrwm=85V, 20.8A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHGX	-	3SMC90A	TVS	Vrwm=90V, 20.6A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHGZ	-	3SMC100A	TVS	Vrwm=100V, 18.6A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHH	-	CMHZ4618	Zener diode	LN, 2.7V±5%, 90mA, 500mW	SOD-123	5d	1a	Cen
CHHE	-	3SMC110A	TVS	Vrwm=110V, 16.8A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHHG	-	3SMC120A	TVS	Vrwm=120V, 15.6A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHHK	-	3SMC130A	TVS	Vrwm=130V, 14.4A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHHM	-	3SMC150A	TVS	Vrwm=150V, 12.4A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHHP	-	3SMC160A	TVS	Vrwm=160V, 11.6A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHHR	-	3SMC170A	TVS	Vrwm=170V, 11.0A, 3000W(1ms)	DO-214AB	1d	1a	Cen
CHJ	-	CMHZ4619	Zener diode	LN, 3.0V±5%, 85mA, 500mW	SOD-123	5d	1a	Cen
CHJ	-	P4SMA56	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 5.2A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CHK	-	CMHZ4620	Zener diode	LN, 3.3V±5%, 80mA, 500mW	SOD-123	5d	1a	Cen
CHK	-	SMA56	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 4.97A, 400W(1ms)	DO-214AC	1d	1a	Lge
CHM	-	CMHZ4621	Zener diode	LN, 3.6V±5%, 75mA, 500mW	SOD-123	5d	1a	Cen
CHM	-	SMA56C	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 4.97A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CHN	-	CMHZ4622	Zener diode	LN, 3.9V±5%, 70mA, 500mW	SOD-123	5d	1a	Cen
CHP	-	CMHZ4623	Zener diode	LN, 4.3V±5%, 65mA, 500mW	SOD-123	5d	1a	Cen
CHP	-	SMAJ30C	TVS	Vrwm=30V, Vbr=33.3..40.7V, 7.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CHT	-	CMHZ4624	Zener diode	LN, 4.7V±5%, 60mA, 500mW	SOD-123	5d	1a	Cen
CHU	-	CMHZ4625	Zener diode	LN, 5.1V±5%, 55mA, 500mW	SOD-123	5d	1a	Cen
CHV	-	CMHZ4626	Zener diode	LN, 5.6V±5%, 50mA, 500mW	SOD-123	5d	1a	Cen
CHX	-	CMHZ4099	Zener diode	LN, 6.8V±5%, 35.0mA, 500mW	SOD-123	5d	1a	Cen
CHY	-	CMHZ4100	Zener diode	LN, 7.5V±5%, 31.8mA, 500mW	SOD-123	5d	1a	Cen
CHZ	-	CMHZ4101	Zener diode	LN, 8.2V±5%, 29.0mA, 500mW	SOD-123	5d	1a	Cen
CI	-	BZX384B12-V-G	Zener diode	12V±2.5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
CIDE	-	3SMC5.0CA	TVS	Vrwm=5.0V, 326.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIDG	-	3SMC6.0CA	TVS	Vrwm=6.0V, 291.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIDK	-	3SMC6.5CA	TVS	Vrwm=6.5V, 267.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIDM	-	3SMC7.0CA	TVS	Vrwm=7.0V, 250.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIDP	-	3SMC7.5CA	TVS	Vrwm=7.5V, 232.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIDR	-	3SMC8.0CA	TVS	Vrwm=8.0V, 220.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIDT	-	3SMC8.5CA	TVS	Vrwm=8.5V, 208.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CIDV	-	3SMC9.0CA	TVS	Vrwm=9.0V, 194.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIDX	-	3SMC10CA	TVS	Vrwm=10V, 176.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIDZ	-	3SMC11CA	TVS	Vrwm=11V, 184.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIEE	-	3SMC12CA	TVS	Vrwm=12V, 150.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIEG	-	3SMC13CA	TVS	Vrwm=13V, 139.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIEK	-	3SMC14CA	TVS	Vrwm=14V, 129.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIEM	-	3SMC15CA	TVS	Vrwm=15V, 123.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIEP	-	3SMC16CA	TVS	Vrwm=16V, 115.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIER	-	3SMC17CA	TVS	Vrwm=17V, 106.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIET	-	3SMC18CA	TVS	Vrwm=18V, 102.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIEV	-	3SMC20CA	TVS	Vrwm=20V, 92.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIEX	-	3SMC22CA	TVS	Vrwm=22V, 84.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIEZ	-	3SMC24CA	TVS	Vrwm=24V, 77.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIFE	-	3SMC26CA	TVS	Vrwm=26V, 71.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIFG	-	3SMC28CA	TVS	Vrwm=28V, 66.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIFK	-	3SMC30CA	TVS	Vrwm=30V, 62.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIFM	-	3SMC33CA	TVS	Vrwm=33V, 56.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIFP	-	3SMC36CA	TVS	Vrwm=36V, 51.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIFR	-	3SMC40CA	TVS	Vrwm=40V, 46.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIFT	-	3SMC43CA	TVS	Vrwm=43V, 43.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIFV	-	3SMC45CA	TVS	Vrwm=45V, 41.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIFX	-	3SMC48CA	TVS	Vrwm=48V, 38.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIFZ	-	3SMC51CA	TVS	Vrwm=51V, 36.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIGE	-	3SMC54CA	TVS	Vrwm=54V, 34.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIGG	-	3SMC58CA	TVS	Vrwm=58V, 32.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIGK	-	3SMC60CA	TVS	Vrwm=60V, 31.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIGM	-	3SMC64CA	TVS	Vrwm=64V, 29.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIGP	-	3SMC70CA	TVS	Vrwm=70V, 26.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIGR	-	3SMC75CA	TVS	Vrwm=75V, 24.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIGT	-	3SMC78CA	TVS	Vrwm=78V, 22.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIGV	-	3SMC85CA	TVS	Vrwm=85V, 20.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIGX	-	3SMC90CA	TVS	Vrwm=90V, 20.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIGZ	-	3SMC100CA	TVS	Vrwm=100V, 18.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIHE	-	3SMC110CA	TVS	Vrwm=110V, 16.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIHG	-	3SMC120CA	TVS	Vrwm=120V, 15.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIHK	-	3SMC130CA	TVS	Vrwm=130V, 14.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIHM	-	3SMC150CA	TVS	Vrwm=150V, 12.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIHP	-	3SMC160CA	TVS	Vrwm=160V, 11.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CIHR	-	3SMC170CA	TVS	Vrwm=170V, 11.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Cen
CJ	-	LMSZ4683T1G	Zener diode	2.85..3.15V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
CJ	-	MM1Z4699	Zener diode	11.40..12.60V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
CJ	-	MMSZ4683	Zener diode	3.0V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
CJ	-	MMSZ4699	Zener diode	12V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
CJ	-	NZH3V3A	Zener diode	3.3V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
CJ05A	-	SMCJ5.0A	TVS	Vrwm=5V, Vbr=6.4..7.25V, 163A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ05A	-	SMCJ5.0CA	TVS	Vrwm=5V, Vbr=6.4..7.25V, 163A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ06A	-	SMCJ6.0A	TVS	Vrwm=6V, Vbr=6.67..7.67V, 145.6A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ06A	-	SMCJ6.0CA	TVS	Vrwm=6V, Vbr=6.67..7.67V, 145.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ07A	-	SMCJ7.0A	TVS	Vrwm=7V, Vbr=7.78..8.95V, 125A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ07A	-	SMCJ7.0CA	TVS	Vrwm=7V, Vbr=7.78..8.95V, 125A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ08A	-	SMCJ8.0A	TVS	Vrwm=8V, Vbr=8.89..10.23V, 110.3A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ08A	-	SMCJ8.0CA	TVS	Vrwm=8V, Vbr=8.89..10.23V, 110.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ09A	-	SMCJ9.0A	TVS	Vrwm=9V, Vbr=10..11.5V, 97.4A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ09A	-	SMCJ9.0CA	TVS	Vrwm=9V, Vbr=10..11.5V, 97.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ1	-	CMHZ5246B	Zener diode	16V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CJ10A	-	SMCJ10A	TVS	Vrwm=10V, Vbr=11.1..12.8V, 88.2A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ10A	-	SMCJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.8V, 88.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ110A	-	SMCJ110A	TVS	Vrwm=110V, Vbr=122..140.5V, 8.4A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ110A	-	SMCJ110CA	TVS	Vrwm=110V, Vbr=122..140.5V, 8.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ11A	-	SMCJ11A	TVS	Vrwm=11V, Vbr=12.2..14V, 82.4A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ11A	-	SMCJ11CA	TVS	Vrwm=11V, Vbr=12.2..14V, 82.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ120A	-	SMCJ120A	TVS	Vrwm=120V, Vbr=133..153V, 7.9A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ120A	-	SMCJ120CA	TVS	Vrwm=120V, Vbr=133..153V, 7.9A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ12A	-	SMCJ12A	TVS	Vrwm=12V, Vbr=13.3..15.3V, 75.3A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ12A	-	SMCJ12CA	TVS	Vrwm=12V, Vbr=13.3..15.3V, 75.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ130A	-	SMCJ130A	TVS	Vrwm=130V, Vbr=144..165.5V, Vcl=209V, 7.A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ130A	-	SMCJ130CA	TVS	Vrwm=130V, Vbr=144..165.5V, 7.A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ13A	-	SMCJ13A	TVS	Vrwm=13V, Vbr=14.4..16.5V, 69.7A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ13A	-	SMCJ13CA	TVS	Vrwm=13V, Vbr=14.4..16.5V, 69.7A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ14A	-	SMCJ14A	TVS	Vrwm=14V, Vbr=15.6..17.9V, 64.7A, 1500W(1mS)	DO-214AB	1d	1a	Sec

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CJ14A	-	SMCJ14CA	TVS	Vrwm=14V, Vbr=15.6..17.9V, 64.7A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ150A	-	SMCJ150A	TVS	Vrwm=150V, Vbr=167..192.5V, 6.2A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ150A	-	SMCJ150CA	TVS	Vrwm=150V, Vbr=167..192.5V, 6.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ15A	-	SMCJ15A	TVS	Vrwm=15V, Vbr=16.7..19.2V, 61.5A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ15A	-	SMCJ15CA	TVS	Vrwm=15V, Vbr=16.7..19.2V, 61.5A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ160A	-	SMCJ160A	TVS	Vrwm=160V, Vbr=178..205V, 5.8A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ160A	-	SMCJ160CA	TVS	Vrwm=160V, Vbr=178..205V, 5.8A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ16A	-	SMCJ16A	TVS	Vrwm=16V, Vbr=17.8..20.5V, 57.7A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ16A	-	SMCJ16CA	TVS	Vrwm=16V, Vbr=17.8..20.5V, 57.7A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ170A	-	SMCJ170A	TVS	Vrwm=170V, Vbr=189..217V, 5.5A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ170A	-	SMCJ170CA	TVS	Vrwm=170V, Vbr=189..217V, 5.5A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ17A	-	SMCJ17A	TVS	Vrwm=17V, Vbr=18.9..21.7V, 53.3A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ17A	-	SMCJ17CA	TVS	Vrwm=17V, Vbr=18.9..21.7V, 53.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ180A	-	SMCJ180A	TVS	Vrwm=180V, Vbr=200..220V, 5.14A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ180A	-	SMCJ180CA	TVS	Vrwm=180V, Vbr=200..220V, 5.14A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ18A	-	SMCJ18A	TVS	Vrwm=18V, Vbr=20..23.3V, 51.4A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ18A	-	SMCJ18CA	TVS	Vrwm=18V, Vbr=20..23.3V, 51.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ190A	-	SMCJ190A	TVS	Vrwm=190V, Vbr=211..232V, 4.87A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ190A	-	SMCJ190CA	TVS	Vrwm=190V, Vbr=211..232V, 4.87A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ2	-	CMHZ5247B	Zener diode	17V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CJ200A	-	SMCJ200A	TVS	Vrwm=200V, Vbr=224..247V, 4.6A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ200A	-	SMCJ200CA	TVS	Vrwm=200V, Vbr=224..247V, 4.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ20A	-	SMCJ20A	TVS	Vrwm=20V, Vbr=22.2..25.5V, 46.3A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ20A	-	SMCJ20CA	TVS	Vrwm=20V, Vbr=22.2..25.5V, 46.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ220A	-	SMCJ220A	TVS	Vrwm=220V, Vbr=246..272V, 4.2A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ220A	-	SMCJ220CA	TVS	Vrwm=220V, Vbr=246..272V, 4.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ22A	-	SMCJ22A	TVS	Vrwm=22V, Vbr=24.4..28V, 42.2A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ22A	-	SMCJ22CA	TVS	Vrwm=22V, Vbr=24.4..28V, 42.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ24A	-	SMCJ24A	TVS	Vrwm=24V, Vbr=26.7..30.7V, 38.6A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ24A	-	SMCJ24CA	TVS	Vrwm=24V, Vbr=26.7..30.7V, 38.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ250A	-	SMCJ250A	TVS	Vrwm=250V, Vbr=279..309V, 3.7A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ250A	-	SMCJ250CA	TVS	Vrwm=250V, Vbr=279..309V, 3.7A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ26A	-	SMCJ26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, 35.6A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ26A	-	SMCJ26CA	TVS	Vrwm=26V, Vbr=28.9..33.2V, 35.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ28A	-	SMCJ28A	TVS	Vrwm=28V, Vbr=31.1..35.8V, 33A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ28A	-	SMCJ28CA	TVS	Vrwm=28V, Vbr=31.1..35.8V, 33A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ3	-	CMHZ5248B	Zener diode	18V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CJ300A	-	SMCJ300A	TVS	Vrwm=300V, Vbr=335..371V, 3.1A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ300A	-	SMCJ300CA	TVS	Vrwm=300V, Vbr=335..371V, 3.1A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ30A	-	SMCJ30A	TVS	Vrwm=30V, Vbr=33.3..38.3V, Vcl=48.4V, 31A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ30A	-	SMCJ30CA	TVS	Vrwm=30V, Vbr=33.3..38.3V, 31A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ350A	-	SMCJ350A	TVS	Vrwm=350V, Vbr=391..432V, 2.6A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ350A	-	SMCJ350CA	TVS	Vrwm=350V, Vbr=391..432V, 2.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ36A	-	SMCJ36A	TVS	Vrwm=36V, Vbr= 40..46V, 25.8A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ36A	-	SMCJ36CA	TVS	Vrwm=36V, Vbr= 40..46V, 25.8A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ4	-	CMHZ5249B	Zener diode	19V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CJ400A	-	SMCJ400A	TVS	Vrwm=400V, Vbr=447..494V, 2.3A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ400A	-	SMCJ400CA	TVS	Vrwm=400V, Vbr=447..494V, 2.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ40A	-	SMCJ40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, 23.2A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ40A	-	SMCJ40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, 23.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ43A	-	SMCJ43A	TVS	Vrwm=43V, Vbr=47.8..54.9V, 21.6A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ43A	-	SMCJ43CA	TVS	Vrwm=43V, Vbr=47.8..54.9V, 21.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ440A	-	SMCJ440A	TVS	Vrwm=440V, Vbr=492..543V, 2.1A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ440A	-	SMCJ440CA	TVS	Vrwm=440V, Vbr=492..543V, 2.1A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ45A	-	SMCJ45A	TVS	Vrwm=45V, Vbr=50..57.5V, 20.6A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ45A	-	SMCJ45CA	TVS	Vrwm=45V, Vbr=50..57.5V, 20.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ48A	-	SMCJ48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, 19.4A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ48A	-	SMCJ48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, 19.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ5	-	CMHZ5250B	Zener diode	20V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CJ51A	-	SMCJ51A	TVS	Vrwm=51V, Vbr=56.7..65.2V, 18.2A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ51A	-	SMCJ51CA	TVS	Vrwm=51V, Vbr=56.7..65.2V, 18.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ54A	-	SMCJ54A	TVS	Vrwm=54V, Vbr=60..69V, 17.2A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ54A	-	SMCJ54CA	TVS	Vrwm=54V, Vbr=60..69V, 17.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ58A	-	SMCJ58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, 16A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ58A	-	SMCJ58CA	TVS	Vrwm=58V, Vbr=64.4..74.1V, 16A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ6.5A	-	SMCJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.3V, 133.9A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ6.5A	-	SMCJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.3V, 133.9A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ60A	-	SMCJ60A	TVS	Vrwm=60V, Vbr=66.7..76.7V, 15.5A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ60A	-	SMCJ60CA	TVS	Vrwm=60V, Vbr=66.7..76.7V, 15.5A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ64A	-	SMCJ64A	TVS	Vrwm=64V, Vbr=71.1..81.8V, 14.6A, 1500W(1mS)	DO-214AB	1d	1a	Sec

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CJ64A	-	SMCJ64CA	TVS	Vrwm=64V, Vbr=71.1..81.8V, 14.6A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ7.5A	-	SMCJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 116.3A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ7.5A	-	SMCJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 116.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ70A	-	SMCJ70A	TVS	Vrwm=70V, Vbr=77.8..89.5V, 13.3A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ70A	-	SMCJ70CA	TVS	Vrwm=70V, Vbr=77.8..89.5V, 13.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ75A	-	SMCJ75A	TVS	Vrwm=75V, Vbr=83.3..95.8V, 12.4A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ75A	-	SMCJ75CA	TVS	Vrwm=75V, Vbr=83.3..95.8V, 12.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ78A	-	SMCJ78A	TVS	Vrwm=78V, Vbr=86.7..99.7V, 11.4A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ78A	-	SMCJ78CA	TVS	Vrwm=78V, Vbr=86.7..99.7V, 11.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ8.5A	-	SMCJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 104.2A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ8.5A	-	SMCJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 104.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ85A	-	SMCJ85A	TVS	Vrwm=85V, Vbr=94.4..108.2V, 10.4A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ85A	-	SMCJ85CA	TVS	Vrwm=85V, Vbr=94.4..108.2V, 10.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJ90A	-	SMCJ90A	TVS	Vrwm=90V, Vbr=100..115.5V, 10.3A, 1500W(1mS)	DO-214AB	1d	1a	Sec
CJ90A	-	SMCJ90CA	TVS	Vrwm=90V, Vbr=100..115.5V, 10.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Sec
CJA	-	CMHZ4115	Zener diode	LN, 22V±5%, 10.8mA, 500mW	SOD-123	5d	1a	Cen
CJC	-	CMHZ4102	Zener diode	LN, 8.7V±5%, 27.4mA, 500mW	SOD-123	5d	1a	Cen
CJD	-	CMHZ4103	Zener diode	LN, 9.1V±5%, 26.2mA, 500mW	SOD-123	5d	1a	Cen
CJE	-	CMHZ4104	Zener diode	LN, 10V±5%, 24.8mA, 500mW	SOD-123	5d	1a	Cen
CJF	-	CMHZ4105	Zener diode	LN, 11V±5%, 21.6mA, 500mW	SOD-123	5d	1a	Cen
CJH	-	CMHZ4106	Zener diode	LN, 12V±5%, 20.4mA, 500mW	SOD-123	5d	1a	Cen
CJJ	-	CMHZ4107	Zener diode	LN, 13V±5%, 19.0mA, 500mW	SOD-123	5d	1a	Cen
CJK	-	CMHZ4108	Zener diode	LN, 14V±5%, 17.5mA, 500mW	SOD-123	5d	1a	Cen
CJM	-	CMHZ4109	Zener diode	LN, 15V±5%, 16.3mA, 500mW	SOD-123	5d	1a	Cen
CJN	-	CMHZ4110	Zener diode	LN, 16V±5%, 15.4mA, 500mW	SOD-123	5d	1a	Cen
CJP	-	CMHZ4111	Zener diode	LN, 17V±5%, 14.5mA, 500mW	SOD-123	5d	1a	Cen
CJT	-	CMHZ4112	Zener diode	LN, 18V±5%, 13.2mA, 500mW	SOD-123	5d	1a	Cen
CJU	-	CMHZ4113	Zener diode	LN, 19V±5%, 12.5mA, 500mW	SOD-123	5d	1a	Cen
CJV	-	CMHZ4114	Zener diode	LN, 20V±5%, 11.9mA, 500mW	SOD-123	5d	1a	Cen
CJY	-	CMHZ4117	Zener diode	LN, 25V±5%, 9.5mA, 500mW	SOD-123	5d	1a	Cen
CJZ	-	CMHZ4116	Zener diode	LN, 24V±5%, 9.9mA, 500mW	SOD-123	5d	1a	Cen
CK	-	BZX384B13-V-G	Zener diode	13V±2.5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
CK	-	CD214B-T30CA	TVS	Vrwm=30V, Irsm=12.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
CK	-	LMSZ4684T1G	Zener diode	3.13..3.47V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
CK	-	MM1Z4700	Zener diode	12.35..13.65V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
CK	-	MMSZ4684	Zener diode	3.3V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
CK	-	MMSZ4700	Zener diode	13V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
CK	-	NZH3V6B	Zener diode	3.6V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
CK	-	P4SMA56A	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 400W(1ms)	DO-214AC	1d	2j	Fag
CK	-	P4SMAJ30A	TVS	Vrwm=30V, 8.3A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CK	-	P6SMBJ30CA	TVS	Vrwm=30V, Vbr=27..33V, 12.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CK	-	PMF30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, Ipp=4.13A, 200W(1ms)	SOD-123FL	7d	1a	Shp
CK	-	SMA6L30A	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, 12.4A, 600W(1ms)	DO-221AC	7d	2s	Lif
CK	-	SMAJ30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, 8.3A, 400W(1ms)	DO-214AC	1d	1k	Vs
CK	-	SMAJ30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, 8.3A, 400W(1ms)	DO-214AC	1d	1q	Ste
CK	-	SMBG30CA	TVS	Vrwm=30V, Vbr=33.1..38.3V, 12.4A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CK	-	SMBJ30CA	TVS	Vrwm=30V, Vbr=33.1..38.3V, 12.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CK	-	SMBJ30CA	TVS	Vrwm=30V, Vbr=33.1..38.3V, 12.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
CK	-	SMF30A	ESDP-diode	Vbr=33.3V, Vrwm=30V, Ipp=4.1A, 200W(1ms)	SMF	7d	2y	Vs
CK	-	SMF30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, Ipp=4.1A, 200W(1ms)	SMF	1d	2sa	Lif
CK	-	SMP30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, Ipp=8.3A, 400W(1ms)	DO-220AA	8d	1a	Vs
CK	-	TV04A300J-G	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=8.26A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CK	-	TV06B300JB-G	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=12.40A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
CK1	-	CMHZ5251B	Zener diode	22V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CK2	-	CMHZ5252B	Zener diode	24V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CK3	-	CMHZ5253B	Zener diode	25V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CK4	-	CMHZ5254B	Zener diode	27V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CK5	-	CMHZ5255B	Zener diode	28V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CK7	-	SM6T36CA	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, 12A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CKA	-	CMHZ4118	Zener diode	LN, 27V±5%, 8.8mA, 500mW	SOD-123	5d	1a	Cen
CKA	-	TPSMA6L30A	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=12.4A, 600W(1ms)	DO-221AC	1d	2s	Lif
CKC	-	CMHZ4119	Zener diode	LN, 28V±5%, 8.5mA, 500mW	SOD-123	5d	1a	Cen
CKD	-	CMHZ4120	Zener diode	LN, 30V±5%, 7.9mA, 500mW	SOD-123	5d	1a	Cen
CKE	-	1SMB5.0A	TVS	Vrwm=5V, 65.2A, 500W(1ms)	DO-214AA	1d	1a	Cen
CKE	-	CMHZ4121	Zener diode	LN, 33V±5%, 7.2mA, 500mW	SOD-123	5d	1a	Cen
CKEC	-	1SMB5.0CA	TVS	Vrwm=5.0V, 65.2A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CKF	-	CMHZ4122	Zener diode	LN, 36V±5%, 6.6mA, 500mW	SOD-123	5d	1a	Cen
CKG	-	1SMB6.0A	TVS	Vrwm=6V, 58.3A, 500W(1ms)	DO-214AA	1d	1a	Cen
CKGC	-	1SMB6.0CA	TVS	Vrwm=6V, 58.3A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CKH	-	CMHZ4123	Zener diode	LN, 39V±5%, 6.1mA, 500mW	SOD-123	5d	1a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CKJ	-	CMHZ4124	Zener diode	LN, 43V±5%, 5.5mA, 500mW	SOD-123	5d	1a	Cen
CKJ	-	P4SMA56A	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CKK	-	1SMB6.5A	TVS	Vrwm=6.5V, 53.6A, 500W(1ms)	DO-214AA	1d	1a	Cen
CKK	-	SMA56A	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.19A, 400W(1ms)	DO-214AC	1d	1a	Lge
CKKC	-	1SMB6.5CA	TVS	Vrwm=6.5V, 53.6A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CKL	-	CMHZ4125	Zener diode	LN, 47V±5%, 5.1mA, 500mW	SOD-123	5d	1a	Cen
CKM	-	1SMB7.0A	TVS	Vrwm=7V, 50A, 500W(1ms)	DO-214AA	1d	1a	Cen
CKM	-	SMA56CA	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.19A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CKMC	-	1SMB7.0CA	TVS	Vrwm=7V, 50A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CKP	-	1SMB7.5A	TVS	Vrwm=7.5V, 46.5A, 500W(1ms)	DO-214AA	1d	1a	Cen
CKP	-	SMAJ30CA	TVS	Vrwm=30V, Vbr=33.3..36.8V, 8.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CKPC	-	1SMB7.5CA	TVS	Vrwm=7.5V, 46.5A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CKR	-	1SMB8.0A	TVS	Vrwm=8V, 44.1A, 500W(1ms)	DO-214AA	1d	1a	Cen
CKRC	-	1SMB8.0CA	TVS	Vrwm=8V, 44.1A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CKT	-	1SMB8.5A	TVS	Vrwm=8.5V, 41.7A, 500W(1ms)	DO-214AA	1d	1a	Cen
CKTC	-	1SMB8.5CA	TVS	Vrwm=8.5V, 41.7A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CKV	-	1SMB9.0A	TVS	Vrwm=9V, 39A, 500W(1ms)	DO-214AA	1d	1a	Cen
CKVC	-	1SMB9.0CA	TVS	Vrwm=9V, 39A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CKX	-	1SMB10A	TVS	Vrwm=10V, 35.3A, 500W(1ms)	DO-214AA	1d	1a	Cen
CKXC	-	1SMB10CA	TVS	Vrwm=10V, 35.3A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CKZ	-	1SMB11A	TVS	Vrwm=11V, 33A, 500W(1ms)	DO-214AA	1d	1a	Cen
CKZC	-	1SMB11CA	TVS	Vrwm=11V, 33.0A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CL	-	BZX384B15-V-G	Zener diode	15V±2.5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
CL	-	NZH3V9B	Zener diode	3.9V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
CL	-	P4SMA62	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
CL	-	P4SMAJ33	TVS	Vrwm=33V, 6.8A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CL	-	P6SMBJ33C	TVS	Vrwm=33V, Vbr=29.7..36.3V, 10.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CL	-	SMAJ30CA	TVS	Vrwm=30V, Vbr=33.3..36.8V, 8.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
CL	-	SMAJ33	TVS	Vrwm=33V, Vbr=36.7..44.9V, 6.8A, 400W(1ms)	DO-214AC	1d	1k	Vs
CL	-	SMBG33C	TVS	Vrwm=33V, Vbr=36.7..46.5V, 10.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CL	-	SMBJ33C	TVS	Vrwm=33V, Vbr=36.7..46.5V, 10.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CL	-	SMP33	TVS	Vbr=36.7..44.9V, Vrwm=33V, Ipp=6.8A, 400W(1ms)	DO-220AA	8d	1a	Vs
CL	-	TV04A330K-G	TVS	Vrwm=33.0V, Vbr=36.70..44.90V, Ipp=6.78A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CL	-	TV06B330KB-G	TVS	Vrwm=33.0V, Vbr=36.70..44.90V, Ipp=10.17A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
CL1	-	MMSZ2V4E	Zener diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1u	Mot
CL2	-	MMSZ2V7E	Zener diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1u	Mot
CL3	-	MMSZ3V0E	Zener diode	3.0V±5%, Izt=5mA, Zzt=95Ω, 500mW	SOD-123	5d	1u	Mot
CL4	-	MMSZ3V3E	Zener diode	3.3V±5%, Izt=5mA, Zzt=95Ω, 500mW	SOD-123	5d	1u	Mot
CL5	-	MMSZ3V6E	Zener diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1u	Mot
CL6	-	MMSZ3V9E	Zener diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1u	Mot
CL7	-	MMSZ4V3E	Zener diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1u	Mot
CL8	-	MMSZ4V7E	Zener diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1u	Mot
CL9	-	MMSZ5V1E	Zener diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 500mW	SOD-123	5d	1u	Mot
CLE	-	1SMB12A	TVS	Vrwm=12V, 30.2A, 500W(1ms)	DO-214AA	1d	1a	Cen
CLEC	-	1SMB12CA	TVS	Vrwm=12V, 30.2A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CLG	-	1SMB13A	TVS	Vrwm=13V, 27.9A, 500W(1ms)	DO-214AA	1d	1a	Cen
CLGC	-	1SMB13CA	TVS	Vrwm=13V, 27.9A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CLJ	-	P4SMA62	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 4.7A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CLK	-	1SMB14A	TVS	Vrwm=14V, 25.8A, 500W(1ms)	DO-214AA	1d	1a	Cen
CLK	-	SMA62	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 4.49A, 400W(1ms)	DO-214AC	1d	1a	Lge
CLKC	-	1SMB14CA	TVS	Vrwm=14V, 25.8A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CLM	-	1SMB15A	TVS	Vrwm=15V, 24A, 500W(1ms)	DO-214AA	1d	1a	Cen
CLM	-	SMA62C	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 4.49A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CLMC	-	1SMB15CA	TVS	Vrwm=15V, 24.0A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CLP	-	1SMB16A	TVS	Vrwm=16V, 23.1A, 500W(1ms)	DO-214AA	1d	1a	Cen
CLP	-	SMAJ33C	TVS	Vrwm=33V, Vbr=36.7..44.9V, 6.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CLPC	-	1SMB16CA	TVS	Vrwm=16V, 23.1A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CLR	-	1SMB17A	TVS	Vrwm=17V, 21.7A, 500W(1ms)	DO-214AA	1d	1a	Cen
CLRC	-	1SMB17CA	TVS	Vrwm=17V, 21.7A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CLT	-	1SMB18A	TVS	Vrwm=18V, 20.5A, 500W(1ms)	DO-214AA	1d	1a	Cen
CLTC	-	1SMB18CA	TVS	Vrwm=18V, 20.5A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CLV	-	1SMB20A	TVS	Vrwm=20V, 18.5A, 500W(1ms)	DO-214AA	1d	1a	Cen
CLVC	-	1SMB20CA	TVS	Vrwm=20V, 18.5A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CLX	-	1SMB22A	TVS	Vrwm=22V, 16.9A, 500W(1ms)	DO-214AA	1d	1a	Cen
CLXC	-	1SMB22CA	TVS	Vrwm=22V, 16.9A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CLZ	-	1SMB24A	TVS	Vrwm=24V, 15.4A, 500W(1ms)	DO-214AA	1d	1a	Cen
CLZC	-	1SMB24CA	TVS	Vrwm=24V, 15.4A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CM	-	BZX384B16-V-G	Zener diode	16V±2.5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
CM	-	CD214B-T33CA	TVS	Vrwm=33V, Irsm=11.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
CM	-	LMSZ4685T1G	Zener diode	3.42..3.78V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CM	-	MM1Z4701	Zener diode	13.30..14.70V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
CM	-	MMSZ4685	Zener diode	3.6V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
CM	-	MMSZ4685-F	Zener diode	3.42..3.78V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
CM	-	MMSZ4701	Zener diode	14V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
CM	-	NZH4V3B	Zener diode	4.3V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
CM	-	P4SMA62A	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
CM	-	P4SMAJ33A	TVS	Vrwm=33V, 7.5A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CM	-	P4SMAJ36	TVS	Vrwm=36V, 6.2A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CM	-	P6SMBJ33CA	TVS	Vrwm=33V, Vbr=29.7..36.3V, 11.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CM	-	PMF33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, Ipp=3.75A, 200W(1ms)	SOD-123FL	7d	1a	Shp
CM	-	SMA6L33A	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, 11.3A, 600W(1ms)	DO-221AC	7d	2s	Lif
CM	-	SMAJ33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, 7.5A, 400W(1ms)	DO-214AC	1d	1k	Vs
CM	-	SMAJ33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, 7.5A, 400W(1ms)	DO-214AC	1d	1q	Ste
CM	-	SMBG33CA	TVS	Vrwm=33V, Vbr=36.7..42.2V, 11.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CM	-	SMBJ33CA	TVS	Vrwm=33V, Vbr=36.7..42.2V, 11.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
CM	-	SMBJ33CA	TVS	Vrwm=33V, Vbr=36.7..42.2V, 11.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CM	-	SMF33A	ESDP-diode	Vbr=36.7V, Vrwm=33V, Ipp=3.8A, 200W(1ms)	SMF	7d	2y	Vs
CM	-	SMF33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, Ipp=3.8A, 200W(1ms)	SMF	1d	2sa	Lif
CM	-	SMP33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, Ipp=7.5A, 400W(1ms)	DO-220AA	8d	1a	Vs
CM	-	TV04A330J-G	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=7.50A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CM	-	TV06B330JB-G	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=11.26A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
CM05A	-	CMF5.0A	TVS	Vrwm=5.0V, Vbr=6.4..7.0V, Ipp=21.7A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM065	-	CMF6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=17.9A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM06A	-	CMF6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=19.4A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM075	-	CMF7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=15.5A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM07A	-	CMF7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.6V, Ipp=16.7A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM085	-	CMF8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, Ipp=13.9A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM08A	-	CMF8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=14.7A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM09A	-	CMF9.0A	TVS	Vrwm=9.0V, Vbr=10..11.1V, Ipp=13A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM1	-	CMHZ5256B	Zener diode	30V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CM1	-	MMSZ5V6E	Zener diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1u	Mot
CM100	-	CMF100A	TVS	Vrwm=100V, Vbr=111..123V, Ipp=1.1A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM10A	-	CMF10A	TVS	Vrwm=10V, Vbr=11.1..12.3V, Ipp=11.8A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM110	-	CMF110A	TVS	Vrwm=110V, Vbr=122..135V, Ipp=1.0A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM11A	-	CMF11A	TVS	Vrwm=11V, Vbr=12.2..13.5V, Ipp=11A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM120	-	CMF120A	TVS	Vrwm=120V, Vbr=133..147V, Ipp=0.9A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM12A	-	CMF12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=10.1A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM130	-	CMF130A	TVS	Vrwm=130V, Vbr=144..159V, Ipp=0.8A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM13A	-	CMF13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, Ipp=9.3A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM14A	-	CMF14A	TVS	Vrwm=14V, Vbr=15.6..17.2V, Ipp=8.6A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM150	-	CMF150A	TVS	Vrwm=150V, Vbr=167..185V, Ipp=0.7A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM15A	-	CMF15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, Ipp=8.2A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM160	-	CMF160A	TVS	Vrwm=160V, Vbr=178..197V, Ipp=0.7A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM16A	-	CMF16A	TVS	Vrwm=16V, Vbr=17.8..19.7V, Ipp=7.7A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM170	-	CMF170A	TVS	Vrwm=170V, Vbr=189..209V, Ipp=0.6A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM17A	-	CMF17A	TVS	Vrwm=17V, Vbr=18.9..20.9V, Ipp=7.2A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM18A	-	CMF18A	TVS	Vrwm=18V, Vbr=20..22.1V, Ipp=6.8A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM2	-	CMHZ5257B	Zener diode	33V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CM2	-	MMSZ6V2E	Zener diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 500mW	SOD-123	5d	1u	Mot
CM20A	-	CMF20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, Ipp=6.2A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM22A	-	CMF22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, Ipp=5.6A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM24A	-	CMF24A	TVS	Vrwm=24V, Vbr=26.7..29.5V, Ipp=5.1A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM26A	-	CMF26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, Ipp=4.8A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM28A	-	CMF28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, Ipp=4.4A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM3	-	CMHZ5258B	Zener diode	36V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CM3	-	MMSZ6V8E	Zener diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1u	Mot
CM30A	-	CMF30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, Ipp=4.1A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM33A	-	CMF33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, Ipp=3.8A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM36A	-	CMF36A	TVS	Vrwm=36V, Vbr=40..44.2V, Ipp=3.4A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM4	-	CMHZ5259B	Zener diode	39V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CM4	-	MMSZ7V5E	Zener diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1u	Mot
CM40A	-	CMF40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, Ipp=3.1A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM43A	-	CMF43A	TVS	Vrwm=43V, Vbr=47.8..52.8V, Ipp=2.9A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM45A	-	CMF45A	TVS	Vrwm=45V, Vbr=50..55.3V, Ipp=2.8A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM48A	-	CMF48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, Ipp=2.6A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM5	-	CMHZ5260B	Zener diode	43V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CM5	-	MMSZ8V2E	Zener diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1u	Mot
CM51A	-	CMF51A	TVS	Vrwm=51V, Vbr=56.7..62.7V, Ipp=2.4A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM54A	-	CMF54A	TVS	Vrwm=54V, Vbr=60..66.3V, Ipp=2.3A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM58A	-	CMF58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, Ipp=2.1A, 200W(1ms)	SOD-123F	6d	1a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CM6	-	MMSZ9V1E	Zener diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1u	Mot
CM60A	-	CMF60A	TVS	Vrwm=60V, Vbr=66.7..73.7V, Ipp=1.8A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM64A	-	CMF64A	TVS	Vrwm=64V, Vbr=71.1..78.6V, Ipp=1.7A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM7	-	MMSZ10E	Zener diode	10V±5%, Izt=5mA, Zzt=20Ω, 500mW	SOD-123	5d	1u	Mot
CM7	-	SM6T39CA	TVS	Vrwm=33.3V, Vbr=37.1..41V, 11.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CM70A	-	CMF70A	TVS	Vrwm=70V, Vbr=77.8..86V, Ipp=1.5A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM75A	-	CMF75A	TVS	Vrwm=75V, Vbr=83.3..92.1V, Ipp=1.4A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM78A	-	CMF78A	TVS	Vrwm=78V, Vbr=86.7..95.8V, Ipp=1.4A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM8	-	MMSZ11E	Zener diode	11V±5%, Izt=5mA, Zzt=20Ω, 500mW	SOD-123	5d	1u	Mot
CM85A	-	CMF85A	TVS	Vrwm=85V, Vbr=94.4..104V, Ipp=1.3A, 200W(1ms)	SOD-123F	6d	1a	Cen
CM9	-	MMSZ12E	Zener diode	12V±5%, Izt=5mA, Zzt=25Ω, 500mW	SOD-123	5d	1u	Mot
CM90A	-	CMF90A	TVS	Vrwm=90V, Vbr=100..111V, Ipp=1.2A, 200W(1ms)	SOD-123F	6d	1a	Cen
CMA	-	TPSMA6L33A	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=11.3A, 600W(1ms)	DO-221AC	1d	2s	Lif
CME	-	1SMB26A	TVS	Vrwm=26V, 14.2A, 500W(1ms)	DO-214AA	1d	1a	Cen
CMEC	-	1SMB26CA	TVS	Vrwm=26V, 14.2A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CMG	-	1SMB28A	TVS	Vrwm=28V, 13.2A, 500W(1ms)	DO-214AA	1d	1a	Cen
CMGC	-	1SMB28CA	TVS	Vrwm=28V, 13.2A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CMJ	-	P4SMA62A	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CMK	-	1SMB30A	TVS	Vrwm=30V, 12.4A, 500W(1ms)	DO-214AA	1d	1a	Cen
CMK	-	SMA62A	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 4.71A, 400W(1ms)	DO-214AC	1d	1a	Lge
CMKC	-	1SMB30CA	TVS	Vrwm=30V, 12.4A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CMM	-	1SMB33A	TVS	Vrwm=33V, 11.3A, 500W(1ms)	DO-214AA	1d	1a	Cen
CMM	-	SMA62CA	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 4.71A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CMMC	-	1SMB33CA	TVS	Vrwm=33V, 11.3A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CMP	-	1SMB36A	TVS	Vrwm=36V, 10.3A, 500W(1ms)	DO-214AA	1d	1a	Cen
CMP	-	SMAJ33CA	TVS	Vrwm=33V, Vbr=36.7..40.6V, 7.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CMPC	-	1SMB36CA	TVS	Vrwm=36V, 10.3A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CMR	-	1SMB40A	TVS	Vrwm=40V, 9.3A, 500W(1ms)	DO-214AA	1d	1a	Cen
CMRC	-	1SMB40CA	TVS	Vrwm=40V, 9.3A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CMT	-	1SMB43A	TVS	Vrwm=43V, 8.6A, 500W(1ms)	DO-214AA	1d	1a	Cen
CMTC	-	1SMB43CA	TVS	Vrwm=43V, 8.6A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CMV	-	1SMB45A	TVS	Vrwm=45V, 8.3A, 500W(1ms)	DO-214AA	1d	1a	Cen
CMVC	-	1SMB45CA	TVS	Vrwm=45V, 8.3A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CMX	-	1SMB48A	TVS	Vrwm=48V, 7.7A, 500W(1ms)	DO-214AA	1d	1a	Cen
CMXC	-	1SMB48CA	TVS	Vrwm=48V, 7.7A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CMZ	-	1SMB51A	TVS	Vrwm=51V, 7.3A, 500W(1ms)	DO-214AA	1d	1a	Cen
CMZC	-	1SMB51CA	TVS	Vrwm=51V, 7.3A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CN	-	BZX384B18-V-G	Zener diode	18V±2.5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
CN	-	LMSZ4686T1G	Zener diode	3.7..4.1V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
CN	-	MM1Z4702	Zener diode	14.25..15.75V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
CN	-	MMSZ4686	Zener diode	3.9V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
CN	-	MMSZ4686-F	Zener diode	3.71..4.10V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
CN	-	MMSZ4702	Zener diode	15V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
CN	-	NZH4V7B	Zener diode	4.7V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
CN	-	P4SMA68	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 4.6A, 400W(1ms)	DO-214AC	1d	2j	Fag
CN	-	P4SMAJ36A	TVS	Vrwm=36V, 6.9A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CN	-	P6SMBJ36C	TVS	Vrwm=36V, Vbr=32.4..39.6V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CN	-	SMAJ33CA	TVS	Vrwm=33V, Vbr=36.7..40.6V, 7.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
CN	-	SMAJ36	TVS	Vrwm=36V, Vbr=40.0..48.9V, 6.2A, 400W(1ms)	DO-214AC	1d	1k	Vs
CN	-	SMBG36C	TVS	Vrwm=36V, Vbr=40.0..50.7V, 9.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CN	-	SMBJ36C	TVS	Vrwm=36V, Vbr=40.0..50.7V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CN	-	SMP36	TVS	Vbr=40.0..48.9V, Vrwm=36V, Ipp=6.2A, 400W(1ms)	DO-220AA	8d	1a	Vs
CN	-	TV04A360K-G	TVS	Vrwm=36.0V, Vbr=40.0..48.90V, Ipp=6.22A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CN	-	TV06B360KB-G	TVS	Vrwm=36.0V, Vbr=40.0..48.90V, Ipp=9.33A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
CN1	-	CMHZ5261B	Zener diode	47V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CN1	-	MMSZ13E	Zener diode	13V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1u	Mot
CN2	-	CMHZ5262B	Zener diode	51V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CN2	-	MMSZ15E	Zener diode	15V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1u	Mot
CN3	-	CMHZ5263B	Zener diode	56V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CN3	-	MMSZ16E	Zener diode	16V±5%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1u	Mot
CN4	-	CMHZ5264B	Zener diode	60V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CN4	-	MMSZ18E	Zener diode	18V±5%, Izt=5mA, Zzt=45Ω, 500mW	SOD-123	5d	1u	Mot
CN5	-	CMHZ5265B	Zener diode	62V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CN5	-	MMSZ20E	Zener diode	20V±5%, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1u	Mot
CN6	-	MMSZ22E	Zener diode	22V±5%, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1u	Mot
CN7	-	MMSZ24E	Zener diode	24V±5%, Izt=5mA, Zzt=70Ω, 500mW	SOD-123	5d	1u	Mot
CN8	-	MMSZ27E	Zener diode	27V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1u	Mot
CN9	-	MMSZ30E	Zener diode	30V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1u	Mot
CNE	-	1SMB54A	TVS	Vrwm=54V, 6.9A, 500W(1ms)	DO-214AA	1d	1a	Cen
CNEC	-	1SMB54CA	TVS	Vrwm=54V, 6.9A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CNG	-	1SMB58A	TVS	Vrwm=58V, 6.4A, 500W(1ms)	DO-214AA	1d	1a	Cen
CNGC	-	1SMB58CA	TVS	Vrwm=58V, 6.4A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CNJ	-	P4SMA68	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 4.3A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CNK	-	1SMB60A	TVS	Vrwm=60V, 6.2A, 500W(1ms)	DO-214AA	1d	1a	Cen
CNK	-	SMA68	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 4.08A, 400W(1ms)	DO-214AC	1d	1a	Lge
CNKC	-	1SMB60CA	TVS	Vrwm=60V, 6.2A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CNM	-	1SMB64A	TVS	Vrwm=64V, 5.8A, 500W(1ms)	DO-214AA	1d	1a	Cen
CNM	-	SMA68C	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 4.08A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CNMC	-	1SMB64CA	TVS	Vrwm=64V, 5.8A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CNP	-	1SMB70A	TVS	Vrwm=70V, 5.3A, 500W(1ms)	DO-214AA	1d	1a	Cen
CNP	-	SMAJ36C	TVS	Vrwm=36V, Vbr=40.0..48.9V, 6.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CNPC	-	1SMB70CA	TVS	Vrwm=70V, 5.3A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CNR	-	1SMB75A	TVS	Vrwm=75V, 4.9A, 500W(1ms)	DO-214AA	1d	1a	Cen
CNRC	-	1SMB75CA	TVS	Vrwm=75V, 4.9A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CNT	-	1SMB78A	TVS	Vrwm=78V, 4.7A, 500W(1ms)	DO-214AA	1d	1a	Cen
CNTC	-	1SMB78CA	TVS	Vrwm=78V, 4.7A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CNV	-	1SMB85A	TVS	Vrwm=85V, 4.4A, 500W(1ms)	DO-214AA	1d	1a	Cen
CNVC	-	1SMB85CA	TVS	Vrwm=85V, 4.4A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CNX	-	1SMB90A	TVS	Vrwm=90V, 4.1A, 500W(1ms)	DO-214AA	1d	1a	Cen
CNXC	-	1SMB90CA	TVS	Vrwm=90V, 4.1A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CNZ	-	1SMB100A	TVS	Vrwm=100V, 3.7A, 500W(1ms)	DO-214AA	1d	1a	Cen
CNZC	-	1SMB100CA	TVS	Vrwm=100V, 3.7A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CO	-	BZX384B20-V-G	Zener diode	20V±2.5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	2m	Vs
CP	-	BZX384B22-V-G	Zener diode	22V±2.5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	2m	Vs
CP	-	CD214B-T36CA	TVS	Vrwm=36V, Irsm=10.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
CP	-	CMDZ2L7	Zener diode	2.565..2.835V, Izt=0.5mA, Zzt=900Ω, 250mW	SOD-323	5d	1a	Cen
CP	-	LMSZ4687T1G	Zener diode	4.09..4.52V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
CP	-	MM1Z4703	Zener diode	15.20..16.80V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
CP	-	MMSZ4687	Zener diode	4.3V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
CP	-	MMSZ4687-F	Zener diode	4.09..4.52V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
CP	-	MMSZ4703	Zener diode	16V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
CP	-	NZH5V1B	Zener diode	5.1V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
CP	-	P4SMA68A	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 4.6A, 400W(1ms)	DO-214AC	1d	2j	Fag
CP	-	P4SMAJ36A	TVS	Vrwm=36V, 6.9A, 400W(1ms)	DO-214AC	1d	1a	Lsr
CP	-	P4SMAJ40	TVS	Vrwm=40V, 5.6A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CP	-	P6SMBJ36CA	TVS	Vrwm=36V, Vbr=32.4..39.6V, 0.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CP	-	PMF36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, Ipp=3.44A, 200W(1ms)	SOD-123FL	7d	1a	Shp
CP	-	SMA6L36A	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, 10.4A, 600W(1ms)	DO-221AC	7d	2s	Lif
CP	-	SMAJ36A	TVS	Vrwm=36V, Vbr=40.0..44.2V, 6.9A, 400W(1ms)	DO-214AC	1d	1k	Vs
CP	-	SMBG36CA	TVS	Vrwm=36V, Vbr=40..46V, 10.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CP	-	SMBJ36CA	TVS	Vrwm=36V, Vbr=40..46V, 10.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CP	-	SMBJ36CA	TVS	Vrwm=36V, Vbr=40..46V, 10.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
CP	-	SMF36A	ESDP-diode	Vbr=40.0V, Vrwm=36V, Ipp=3.4A, 200W(1ms)	SMF	7d	2y	Vs
CP	-	SMF36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, Ipp=3.4A, 200W(1ms)	SMF	1d	2sa	Lif
CP	-	SMP36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, Ipp=6.9A, 400W(1ms)	DO-220AA	8d	1a	Vs
CP	-	TV04A360J-G	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=6.88A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CP	-	TV06B360JB-G	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=10.33A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
CP1	-	CMHZ5266B	Zener diode	68V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CP1	-	MMSZ33E	Zener diode	33V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1u	Mot
CP2	-	CMHZ5267B	Zener diode	75V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CP2	-	MMSZ36E	Zener diode	36V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1u	Mot
CP3	-	CMHZ5268B	Zener diode	82V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CP3	-	MMSZ39E	Zener diode	39V±5%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1u	Mot
CP4	-	CMHZ5269B	Zener diode	87V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CP4	-	MMSZ43E	Zener diode	43V±5%, Izt=5mA, Zzt=150Ω, 500mW	SOD-123	5d	1u	Mot
CP5	-	CMHZ5270B	Zener diode	91V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CP5	-	MMSZ47E	Zener diode	47V±5%, Izt=5mA, Zzt=170Ω, 500mW	SOD-123	5d	1u	Mot
CP6	-	MMSZ51E	Zener diode	51V±5%, Izt=5mA, Zzt=180Ω, 500mW	SOD-123	5d	1u	Mot
CP7	-	MMSZ56E	Zener diode	56V±5%, Izt=5mA, Zzt=200Ω, 500mW	SOD-123	5d	1u	Mot
CPA	-	TPSMA6L36A	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=10.4A, 600W(1ms)	DO-221AC	1d	2s	Lif
CPE	-	1SMB110A	TVS	Vrwm=110V, 3.4A, 500W(1ms)	DO-214AA	1d	1a	Cen
CPEC	-	1SMB110CA	TVS	Vrwm=110V, 3.4A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CPG	-	1SMB120A	TVS	Vrwm=120V, 3.1A, 500W(1ms)	DO-214AA	1d	1a	Cen
CPGC	-	1SMB120CA	TVS	Vrwm=120V, 3.1A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CPJ	-	P4SMA68A	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 4.6A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CPK	-	1SMB130A	TVS	Vrwm=130V, 2.9A, 500W(1ms)	DO-214AA	1d	1a	Cen
CPK	-	SMA68A	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 4.35A, 400W(1ms)	DO-214AC	1d	1a	Lge
CPKC	-	1SMB130CA	TVS	Vrwm=130V, 2.9A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CPM	-	1SMB150A	TVS	Vrwm=150V, 2.5A, 500W(1ms)	DO-214AA	1d	1a	Cen
CPM	-	SMA68CA	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 4.35A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CPMC	-	1SMB150CA	TVS	Vrwm=150V, 2.5A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CPP	-	1SMB160A	TVS	Vrwm=160V, 2.3A, 500W(1ms)	DO-214AA	1d	1a	Cen
CPP	-	SMAJ36CA	TVS	Vrwm=36V, Vbr=40.0..44.2V, 6.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CPPC	-	1SMB160CA	TVS	Vrwm=160V, 2.3A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CPR	-	1SMB170A	TVS	Vrwm=170V, 2.2A, 500W(1ms)	DO-214AA	1d	1a	Cen
CPRC	-	1SMB170CA	TVS	Vrwm=170V, 2.2A, 500W(1ms), Bidir.	DO-214AA	1ba	1j	Cen
CQ	-	NZH5V6B	Zener diode	5.6V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
CQ	-	P4SMA75	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 400W(1ms)	DO-214AC	1d	2j	Fag
CQ	-	P4SMAJ40A	TVS	Vrwm=40V, 6.2A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CQ	-	P6SMBJ40C	TVS	Vrwm=40V, Vbr=44.4..51.1V, 8.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CQ	-	SMAJ40	TVS	Vrwm=40V, Vbr=44.4..54.3V, 5.6A, 400W(1ms)	DO-214AC	1d	1k	Vs
CQ	-	SMBG40C	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CQ	-	SMBJ40C	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CQ	-	TV04A400K-G	TVS	Vrwm=40.0V, Vbr=44.40..54.30V, Ipp=5.60A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CQ	-	TV06B400KB-G	TVS	Vrwm=40.0V, Vbr=44.40..54.30V, Ipp=8.40A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
CQJ	-	P4SMA75	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 3.9A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CQK	-	SMA75	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 3.70A, 400W(1ms)	DO-214AC	1d	1a	Lge
CQM	-	SMA75C	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 3.70A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CQP	-	SMAJ40C	TVS	Vrwm=40V, Vbr=44.4..54.3V, 5.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CR	-	BZX384B24-V-G	Zener diode	24V±2.5%, Izt=2mA, Zzt=25Ω, 200mW	SOD-323	5d	2m	Vs
CR	-	CD214B-T40CA	TVS	Vrwm=40V, Irsm=9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
CR	-	MM1Z4704	Zener diode	16.15..17.85V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
CR	-	MMSZ4704	Zener diode	17V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
CR	-	NZH6V2B	Zener diode	6.2V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
CR	-	P4SMA75A	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 400W(1ms)	DO-214AC	1d	2j	Fag
CR	-	P4SMAJ40A	TVS	Vrwm=40V, 6.2A, 400W(1ms)	DO-214AC	1d	1a	Lsr
CR	-	P6SMBJ40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CR	-	PMF40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, Ipp=3.10A, 200W(1ms)	SOD-123FL	7d	1a	Shp
CR	-	PZU8.2B1A	Zener diode	8.2V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
CR	-	SMA6L40A	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, 9.3A, 600W(1ms)	DO-221AC	7d	2s	Lif
CR	-	SMAJ40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, 6.2A, 400W(1ms)	DO-214AC	1d	1k	Vs
CR	-	SMBG40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CR	-	SMBJ40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CR	-	SMBJ40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
CR	-	SMF40A	ESDP-diode	Vbr=44.4V, Vrwm=40V, Ipp=3.1A, 200W(1ms)	SMF	7d	2y	Vs
CR	-	SMF40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, Ipp=3.1A, 200W(1ms)	SMF	1d	2sa	Lif
CR	-	TV04A400J-G	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=6.20A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CR	-	TV06B400JB-G	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=9.30A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
CR1	-	CMHZ5271B	Zener diode	100V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CR2	-	CMHZ5272B	Zener diode	110V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CR3	-	CMHZ5273B	Zener diode	120V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CR4	-	CMHZ5274B	Zener diode	130V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CR5	-	CMHZ5275B	Zener diode	140V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CRA	-	TPSMA6L40A	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=9.3A, 600W(1ms)	DO-221AC	1d	2s	Lif
CRD	-	SMCJ54	TVS	Vbr=60.0..73.3V, Vrwm=54V, 15.6A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRE	-	SMCJ54A	TVS	Vbr=60.0..66.3V, Vrwm=54V, 17.2A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRF	-	SMCJ58	TVS	Vbr=64.4..78.7V, Vrwm=58V, 14.6A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRG	-	SMCJ58A	TVS	Vbr=64.4..71.2V, Vrwm=58V, 16.0A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRH	-	SMCJ60	TVS	Vbr=66.7..81.5V, Vrwm=60V, 14.0A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRJ	-	P4SMA75A	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CRK	-	SMA75A	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 3.88A, 400W(1ms)	DO-214AC	1d	1a	Lge
CRK	-	SMCJ60A	TVS	Vbr=66.7..73.7V, Vrwm=60V, 15.5A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRL	-	SMCJ64	TVS	Vbr=71.1..86.9V, Vrwm=64V, 13.2A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRM	-	SMA75CA	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 3.88A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CRM	-	SMCJ64A	TVS	Vbr=71.1..78.6V, Vrwm=64V, 14.6A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRN	-	SMCJ70	TVS	Vbr=77.8..95.1V, Vrwm=70V, 12.0A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRP	-	SMAJ40CA	TVS	Vrwm=40V, Vbr=44.4..49.1V, 6.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CRP	-	SMCJ70A	TVS	Vbr=77.8..86.0V, Vrwm=70V, 13.3A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRQ	-	SMCJ75	TVS	Vbr=83.3..102V, Vrwm=75V, 11.2A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRR	-	SMCJ75A	TVS	Vbr=83.3..92.1V, Vrwm=75V, 12.4A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRS	-	SMCJ78	TVS	Vbr=86.7..106V, Vrwm=78V, 10.8A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRT	-	SMCJ78A	TVS	Vbr=86.7..95.8V, Vrwm=78V, 11.9A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRU	-	SMCJ85	TVS	Vbr=94.4..115V, Vrwm=85V, 9.9A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRV	-	SMCJ85A	TVS	Vbr=94.4..104V, Vrwm=85V, 10.9A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRW	-	SMCJ90	TVS	Vbr=100..122V, Vrwm=90V, 9.4A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRX	-	SMCJ90A	TVS	Vbr=100..111V, Vrwm=90V, 10.3A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRY	-	SMCJ100	TVS	Vbr=111..136V, Vrwm=100V, 8.4A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CRZ	-	SMCJ100A	TVS	Vbr=111..123V, Vrwm=100V, 9.3A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CS	-	BZX384B27-V-G	Zener diode	27V±2.5%, Izt=2mA, Zzt=25Ω, 200mW	SOD-323	5d	2m	Vs
CS	-	NZH6V8B	Zener diode	6.8V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CS	-	P4SMA82	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 400W(1ms)	DO-214AC	1d	2j	Fag
CS	-	P4SMAJ43	TVS	Vrwm=43V, 5.2A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CS	-	P6SMBJ43C	TVS	Vrwm=43V, Vbr=38.7..47.3V, 7.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CS	-	PZU8.2B2A	Zener diode	8.2V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
CS	-	SMAJ43	TVS	Vrwm=43V, Vbr=47.8..58.4V, 5.2A, 400W(1ms)	DO-214AC	1d	1k	Vs
CS	-	SMBG43C	TVS	Vrwm=43V, Vbr=47.8..60.5V, 7.8A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CS	-	SMBJ43C	TVS	Vrwm=43V, Vbr=47.8..60.5V, 7.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CS	-	TV04A430K-G	TVS	Vrwm=43.0V, Vbr=47.80..58.40V, Ipp=5.22A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CS	-	TV06B430KB-G	TVS	Vrwm=43.0V, Vbr=47.80..58.40V, Ipp=7.82A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
CS1	-	CMHZ5276B	Zener diode	150V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CS100	-	CMSH1-100	Si-diode	SBR, 100V, 1A, Vf<0.85V(1A)	DO-214AA	1d	1a	Cen
CS100M	-	CMSH1-100M	Si-diode	SBR, 100V, 1A, Vf<0.85V(1A)	DO-214AC	1d	1a	Cen
CS2	-	CMHZ5277B	Zener diode	160V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CS20	-	CMSH1-20	Si-diode	SBR, 20V, 1A, Vf<0.55V(1A)	DO-214AA	1d	1a	Cen
CS20M	-	CMSH1-20M	Si-diode	SBR, 20V, 1A, Vf<0.55V(1A)	DO-214AC	1d	1a	Cen
CS20ML	-	CMSH1-20ML	Si-diode	SBR, 20V, 1A, Vf<0.38V(1A)	DO-214AC	1d	1a	Cen
CS2100	-	CMSH2-100	Si-diode	SBR, 100V, 2A, Vf<0.85V(2A)	DO-214AA	1d	1a	Cen
CS2100M	-	CMSH2-100M	Si-diode	SBR, 100V, 3A, Vf<0.85V(2A)	DO-214AC	1d	1a	Cen
CS220	-	CMSH2-20	Si-diode	SBR, 20V, 2A, Vf<0.55V(2A)	DO-214AA	1d	1a	Cen
CS220L	-	CMSH2-20L	Si-diode	SBR, 20V, 2A, Vf<0.38V(2A)	DO-214AA	1d	1a	Cen
CS220M	-	CMSH2-20M	Si-diode	SBR, 20V, 2A, Vf<0.55V(2A)	DO-214AC	1d	1a	Cen
CS240	-	CMSH2-40	Si-diode	SBR, 40V, 2A, Vf<0.55V(2A)	DO-214AA	1d	1a	Cen
CS240L	-	CMSH2-40L	Si-diode	SBR, 40V, 2A, Vf<0.4V(2A)	DO-214AA	1d	1a	Cen
CS240M	-	CMSH2-40M	Si-diode	SBR, 40V, 2A, Vf<0.55V(2A)	DO-214AC	1d	1a	Cen
CS260	-	CMSH2-60	Si-diode	SBR, 60V, 2A, Vf<0.7V(2A)	DO-214AA	1d	1a	Cen
CS260M	-	CMSH2-60M	Si-diode	SBR, 60V, 2A, Vf<0.7V(2A)	DO-214AC	1d	1a	Cen
CS3	-	CMHZ5278B	Zener diode	170V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CS3100	-	CMSH3-100	Si-diode	SBR, 100V, 3A, Vf<0.8V(3A)	DO-214AB	1d	1a	Cen
CS3100M	-	CMSH3-100M	Si-diode	SBR, 100V, 3A, Vf<0.85V(3A)	DO-214AA	1d	1a	Cen
CS3100MA	-	CMSH3-100MA	Si-diode	SBR, 100V, 3A, Vf<0.85V(3A)	DO-214AC	1d	1a	Cen
CS320	-	CMSH3-20	Si-diode	SBR, 20V, 3A, Vf<0.5V(3A)	DO-214AB	1d	1a	Cen
CS320L	-	CMSH3-20L	Si-diode	SBR, 20V, 4A, Vf<0.42V(4A)	DO-214AB	1d	1a	Cen
CS320M	-	CMSH3-20M	Si-diode	SBR, 20V, 3A, Vf<0.55V(3A)	DO-214AA	1d	1a	Cen
CS320MA	-	CMSH3-20MA	Si-diode	SBR, 20V, 3A, Vf<0.5V(3A)	DO-214AC	1d	1a	Cen
CS340	-	CMSH3-40	Si-diode	SBR, 40V, 3A, Vf<0.5V(3A)	DO-214AB	1d	1a	Cen
CS340L	-	CMSH3-40L	Si-diode	SBR, 40V, 4A, Vf<0.44V(4A)	DO-214AB	1d	1a	Cen
CS340M	-	CMSH3-40M	Si-diode	SBR, 40V, 3A, Vf<0.55V(3A)	DO-214AA	1d	1a	Cen
CS340MA	-	CMSH3-40MA	Si-diode	SBR, 40V, 3A, Vf<0.5V(3A)	DO-214AC	1d	1a	Cen
CS360	-	CMSH3-60	Si-diode	SBR, 60V, 3A, Vf<0.7V(3A)	DO-214AB	1d	1a	Cen
CS360M	-	CMSH3-60M	Si-diode	SBR, 60V, 3A, Vf<0.75V(3A)	DO-214AA	1d	1a	Cen
CS360MA	-	CMSH3-60MA	Si-diode	SBR, 60V, 3A, Vf<0.7V(3A)	DO-214AC	1d	1a	Cen
CS4	-	CMHZ5279B	Zener diode	180V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CS40	-	CMSH1-40	Si-diode	SBR, 40V, 1A, Vf<0.55V(1A)	DO-214AA	1d	1a	Cen
CS40M	-	CMSH1-40M	Si-diode	SBR, 40V, 1A, Vf<0.55V(1A)	DO-214AC	1d	1a	Cen
CS40ML	-	CMSH1-40ML	Si-diode	SBR, 40V, 1A, Vf<0.4V(1A)	DO-214AC	1d	1a	Cen
CS5	-	CMHZ5280B	Zener diode	190V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CS5100	-	CMSH5-100	Si-diode	SBR, 100V, 5A, Vf<0.85V(5A)	DO-214AB	1d	1a	Cen
CS520	-	CMSH5-20	Si-diode	SBR, 20V, 5A, Vf<0.55V(5A)	DO-214AB	1d	1a	Cen
CS540	-	CMSH5-40	Si-diode	SBR, 40V, 5A, Vf<0.55V(5A)	DO-214AB	1d	1a	Cen
CS560	-	CMSH5-60	Si-diode	SBR, 60V, 5A, Vf<0.75V(5A)	DO-214AB	1d	1a	Cen
CS60	-	CMSH1-60	Si-diode	SBR, 60V, 1A, Vf<0.7V(1A)	DO-214AA	1d	1a	Cen
CS60M	-	CMSH1-60M	Si-diode	SBR, 60V, 1A, Vf<0.7V(1A)	DO-214AC	1d	1a	Cen
CSD	-	SMCJ110	TVS	Vbr=122..149V, Vrwm=110V, 7.7A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CSE	-	SMCJ110A	TVS	Vbr=122..135V, Vrwm=110V, 8.5A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CSF	-	SMCJ120	TVS	Vbr=133..163V, Vrwm=120V, 7.0A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CSF01	-	CMR1S-01	Si-diode	Rectifer, S-Fast-Recov, 100V, 1A, Vf<0.95V(1A), <35ns	DO-214AA	1d	1a	Cen
CSF02	-	CMR1S-02	Si-diode	Rectifer, S-Fast-Recov, 200V, 1A, Vf<0.95V(1A), <35ns	DO-214AA	1d	1a	Cen
CSG	-	SMCJ120A	TVS	Vbr=133..147V, Vrwm=120V, 7.8A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CSH	-	SMCJ130	TVS	Vbr=144..176V, Vrwm=130V, 6.5A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CSJ	-	P4SMA82	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 3.6A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CSK	-	SMA82	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 3.39A, 400W(1ms)	DO-214AC	1d	1a	Lge
CSK	-	SMCJ130A	TVS	Vbr=144..159V, Vrwm=130V, 7.2A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CSL	-	SMCJ150	TVS	Vbr=167..204V, Vrwm=150V, 5.6A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CSM	-	SMA82C	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 3.39A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CSM	-	SMCJ150A	TVS	Vbr=167..185V, Vrwm=150V, 6.2A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CSN	-	SMCJ160	TVS	Vbr=178..218V, Vrwm=160V, 5.2A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CSP	-	SMAJ43C	TVS	Vrwm=43V, Vbr=47.8..58.4V, 5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CSP	-	SMCJ160A	TVS	Vbr=178..197V, Vrwm=160V, 5.8A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CSQ	-	SMCJ170	TVS	Vbr=189..231V, Vrwm=170V, 4.9A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CSR	-	SMCJ170A	TVS	Vbr=189..209V, Vrwm=170V, 5.5A, 1500W(1ms)	DO-214AB	1d	1a	Gal

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CSS	-	SMCJ188A	TVS	Vbr=209..231V, Vrwm=188V, 4.6A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CST	-	SMCJ188	TVS	Vbr=209..255V, Vrwm=188V, 4.4A, 1500W(1ms)	DO-214AB	1d	1a	Gal
CT	-	BZX384B30-V-G	Zener diode	30V±2.5%, Izt=2mA, Zzt=30Ω, 200mW	SOD-323	5d	2m	Vs
CT	-	CD214B-T43CA	TVS	Vrwm=43V, Irsm=8.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
CT	-	LMSZ4688T1G	Zener diode	4.47..4.94V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
CT	-	MMSZ4688	Zener diode	4.7V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
CT	-	MMSZ4688-F	Zener diode	4.47..4.94V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
CT	-	NZH7V5C	Zener diode	7.5V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
CT	-	P4SMA82A	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 400W(1ms)	DO-214AC	1d	2j	Fag
CT	-	P4SMAJ43A	TVS	Vrwm=43V, 5.7A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CT	-	P6SMBJ43CA	TVS	Vrwm=43V, Vbr=38.7..47.3V, 8.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CT	-	PMF43A	TVS	Vbr=47.8..52.8V, Vrwm=43V, Ipp=2.88A, 200W(1ms)	SOD-123FL	7d	1a	Shp
CT	-	PZU8.2B3A	Zener diode	8.2V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
CT	-	SMA6L43A	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, 8.7A, 600W(1ms)	DO-221AC	7d	2s	Lif
CT	-	SMAJ43A	TVS	Vrwm=43V, Vbr=47.8..52.8V, 5.8A, 400W(1ms)	DO-214AC	1d	1k	Vs
CT	-	SMBG43CA	TVS	Vrwm=43V, Vbr=47.8..54.9V, 8.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CT	-	SMBJ43CA	TVS	Vrwm=43V, Vbr=47.8..54.9V, 8.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
CT	-	SMBJ43CA	TVS	Vrwm=43V, Vbr=47.8..54.9V, 8.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CT	-	SMF43A	ESDP-diode	Vbr=47.8V, Vrwm=43V, Ipp=2.9A, 200W(1ms)	SMF	7d	2y	Vs
CT	-	SMF43A	TVS	Vbr=47.8..52.8V, Vrwm=43V, Ipp=2.9A, 200W(1ms)	SMF	1d	2sa	Lif
CT	-	TV04A430J-G	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=5.76A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CT	-	TV06B430JB-G	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=8.65A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
CT1	-	CMHZ5281B	Zener diode	200V±5%, If=10mA, 500mW	SOD-123	5d	1a	Cen
CTA	-	TPSMA6L43A	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=8.7A, 600W(1ms)	DO-221AC	1d	2s	Lif
CTJ	-	P4SMA82A	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CTK	-	SMA82A	TVS	Vbr=77.8..86.0V, Vrwm=70.1V, 3.54A, 400W(1ms)	DO-214AC	1d	1a	Lge
CTM	-	SMA82CA	TVS	Vbr=77.8..86.0V, Vrwm=70.1V, 3.54A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CTP	-	SMAJ43CA	TVS	Vrwm=43V, Vbr=47.8..52.8V, 5.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CU	-	BZX384B33-V-G	Zener diode	33V±2.5%, Izt=2mA, Zzt=35Ω, 200mW	SOD-323	5d	2m	Vs
CU	-	LMSZ4689T1G	Zener diode	4.85..5.36V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
CU	-	MMSZ4689	Zener diode	5.1V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
CU	-	MMSZ4689-F	Zener diode	4.85..5.36V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
CU	-	NZH8V2B	Zener diode	8.2V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
CU	-	P4SMA91	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 400W(1ms)	DO-214AC	1d	2j	Fag
CU	-	P4SMAJ45	TVS	Vrwm=45V, 5A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CU	-	P6SMBJ45C	TVS	Vrwm=45V, Vbr=50.0..63.3V, 7.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CU	-	PZU9.1BA	Zener diode	9.1V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
CU	-	SMAJ45	TVS	Vrwm=45V, Vbr=50.0..61.1V, 5A, 400W(1ms)	DO-214AC	1d	1k	Vs
CU	-	SMBG45C	TVS	Vrwm=45V, Vbr=50.0..63.3V, 7.5A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CU	-	SMBJ45C	TVS	Vrwm=45V, Vbr=50.0..63.3V, 7.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CU	-	TV04A450K-G	TVS	Vrwm=45.0V, Vbr=50.0..61.10V, Ipp=4.98A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CU	-	TV06B450KB-G	TVS	Vrwm=45.0V, Vbr=50.0..61.10V, Ipp=7.47A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
CU01	-	CMR1U-01	Si-diode	Rectifer, U-Fast-Rec, 100V, 1A, Vf<1V(1A), <50ns	DO-214AA	1d	1a	Cen
CU01M	-	CMR1U-01M	Si-diode	Rectifer, U-Fast-Rec, 100V, 1A, Vf<1V(1A), <35ns	DO-214AC	1d	1a	Cen
CU02	-	CMR1U-02	Si-diode	Rectifer, U-Fast-Rec, 200V, 1A, Vf<1V(1A), <50ns	DO-214AA	1d	1a	Cen
CU02M	-	CMR1U-02M	Si-diode	Rectifer, U-Fast-Rec, 200V, 1A, Vf<1V(1A), <35ns	DO-214AC	1d	1a	Cen
CU04	-	CMR1U-04	Si-diode	Rectifer, U-Fast-Rec, 400V, 1A, Vf<1V(1A), <50ns	DO-214AA	1d	1a	Cen
CU04M	-	CMR1U-04M	Si-diode	Rectifer, U-Fast-Rec, 400V, 1A, Vf<1V(1A), <50ns	DO-214AC	1d	1a	Cen
CU06	-	CMR1U-06	Si-diode	Rectifier, U-Fast-Rec, 600V, 1A, Vf<1V(1A), <100ns	DO-214AA	1d	1a	Cen
CU06M	-	CMR1U-06M	Si-diode	Rectifier, U-Fast-Rec, 600V, 1A, Vf<1V(1A), <75ns	DO-214AC	1d	1a	Cen
CU10	-	CMR1U-10	Si-diode	Rectifer, U-Fast-Rec, 1000V, 1A, Vf<1V(1A), <100ns	DO-214AA	1d	1a	Cen
CU10M	-	CMR1U-10M	Si-diode	Rectifer, U-Fast-Rec, 1000V, 1A, Vf<1V(1A), <100ns	DO-214AC	1d	1a	Cen
CU201	-	CMR2U-01	Si-diode	Rectifier, U-Fast-Rec, 100V, 2A, Vf<1V(2A), <50ns	DO-214AA	1d	1a	Cen
CU202	-	CMR2U-02	Si-diode	Rectifier, U-Fast-Rec, 200V, 2A, Vf<1V(2A), <50ns	DO-214AA	1d	1a	Cen
CU204	-	CMR2U-04	Si-diode	Rectifier, U-Fast-Rec, 400V, 2A, Vf<1V(2A), <50ns	DO-214AA	1d	1a	Cen
CU206	-	CMR2U-06	Si-diode	Rectifier, U-Fast-Rec, 600V, 2A, Vf<1V(2A), <50ns	DO-214AA	1d	1a	Cen
CU301	-	CMR3U-01	Si-diode	Rectifer, U-Fast-Rec, 100V, 3A, Vf<1V(3A), <50ns	DO-214AB	1d	1a	Cen
CU301M	-	CMR3U-01M	Si-diode	Rectifer, U-Fast-Rec, 100V, 3A, Vf<1V(3A), <50ns	DO-214AA	1d	1a	Cen
CU302	-	CMR3U-02	Si-diode	Rectifer, U-Fast-Rec, 200V, 3A, Vf<1V(3A), <50ns	DO-214AB	1d	1a	Cen
CU302M	-	CMR3U-02M	Si-diode	Rectifer, U-Fast-Rec, 200V, 3A, Vf<1V(3A), <50ns	DO-214AA	1d	1a	Cen
CU304	-	CMR3U-04	Si-diode	Rectifer, U-Fast-Rec, 400V, 3A, Vf<1.25V(3A), <50ns	DO-214AB	1d	1a	Cen
CU304M	-	CMR3U-04M	Si-diode	Rectifer, U-Fast-Rec, 400V, 3A, Vf<1.25V(3A), <50ns	DO-214AA	1d	1a	Cen
CU306	-	CMR3U-06	Si-diode	Rectifer, U-Fast-Rec, 600V, 3A, Vf<1.4V(3A), <100ns	DO-214AB	1d	1a	Cen
CU306M	-	CMR3U-06M	Si-diode	Rectifer, U-Fast-Rec, 600V, 3A, Vf<1.4V(3A), <100ns	DO-214AA	1d	1a	Cen
CU310	-	CMR3U-10	Si-diode	Rectifer, U-Fast-Rec, 1000V, 3A, Vf<1.7V(3A), <100ns	DO-214AB	1d	1a	Cen
CU310M	-	CMR3U-10M	Si-diode	Rectifer, U-Fast-Rec, 1000V, 3A, Vf<2V(3A), <100ns	DO-214AA	1d	1a	Cen
CU502	-	CMR5U-02	Si-diode	Rectifer, U-Fast-Rec, 200V, 5A, Vf<1V(5A), <50ns	DO-214AB	1d	1a	Cen
CU504	-	CMR5U-04	Si-diode	Rectifer, U-Fast-Rec, 400V, 5A, Vf<1.3V(5A), <50ns	DO-214AB	1d	1a	Cen
CU506	-	CMR5U-06	Si-diode	Rectifer, U-Fast-Rec, 600V, 5A, Vf<1.7V(5A), <100ns	DO-214AB	1d	1a	Cen
CU508	-	CMR5U-08	Si-diode	Rectifer, U-Fast-Rec, 800V, 5A, Vf<1.7V(5A), <100ns	DO-214AB	1d	1a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CUJ	-	P4SMA91	TVS	Vbr=81.9..100V, Vrwm=73.7V, 3.2A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CUJ	-	SMBJ40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms)	DO-214AA	1d	1q	Ste
CUK	-	SMA91	TVS	Vbr=81.9..100V, Vrwm=73.7V, 3.05A, 400W(1ms)	DO-214AC	1d	1a	Lge
CUM	-	SMA91C	TVS	Vbr=81.9..100V, Vrwm=73.7V, 3.05A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CUM	-	SMBJ70A	TVS	Vrwm=70V, Vbr=77.8..89.5V, 5.3A, 600W(1ms)	DO-214AA	1d	1q	Ste
CUP	-	SMAJ45C	TVS	Vrwm=45V, Vbr=50.0..61.1V, 5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CUQ	-	SMBJ100A	TVS	Vrwm=100V, Vbr=111..128V, 3.7A, 600W(1ms)	DO-214AA	1d	1q	Ste
CV	-	CD214B-T45CA	TVS	Vrwm=45V, Irsm=8.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
CV	-	LMSZ4690T1G	Zener diode	5.32..5.88V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
CV	-	MMSZ4690	Zener diode	5.6V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
CV	-	MMSZ4690-F	Zener diode	5.32..5.88V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
CV	-	NZH9V1B	Zener diode	9.1V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
CV	-	P4SMA91A	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 400W(1ms)	DO-214AC	1d	2j	Fag
CV	-	P4SMAJ45A	TVS	Vrwm=45V, 5.5A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CV	-	P6SMBJ45CA	TVS	Vrwm=45V, Vbr=50.0..63.3V, 8.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CV	-	PMF45A	TVS	Vbr=50.0..55.3V, Vrwm=45V, Ipp=2.75A, 200W(1ms)	SOD-123FL	7d	1a	Shp
CV	-	PZU9.1B1A	Zener diode	9.1V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
CV	-	SMA6L45A	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, 8.3A, 600W(1ms)	DO-221AC	7d	2s	Lif
CV	-	SMAJ45A	TVS	Vrwm=45V, Vbr=50.0..55.3V, 5.5A, 400W(1ms)	DO-214AC	1d	1k	Vs
CV	-	SMBG45CA	TVS	Vrwm=45V, Vbr=50.0..57.5V, 8.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CV	-	SMBJ45CA	TVS	Vrwm=45V, Vbr=50.0..57.5V, 8.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CV	-	SMBJ45CA	TVS	Vrwm=45V, Vbr=50.0..57.5V, 8.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
CV	-	SMF45A	ESDP-diode	Vbr=50.0V, Vrwm=45V, Ipp=2.8A, 200W(1ms)	SMF	7d	2y	Vs
CV	-	SMF45A	TVS	Vbr=50.0..55.3V, Vrwm=45V, Ipp=2.8A, 200W(1ms)	SMF	1d	2sa	Lif
CV	-	TV04A450J-G	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=5.50A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CV	-	TV06B450JB-G	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=8.25A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
CVA	-	TPSMA6L45A	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=8.3A, 600W(1ms)	DO-221AC	1d	2s	Lif
CVD	-	SMCJ110C	TVS	Vbr=122..149V, Vrwm=110V, 7.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CVE	-	SMCJ110CA	TVS	Vbr=122..135V, Vrwm=110V, 8.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CVF	-	SMCJ120C	TVS	Vbr=133..163V, Vrwm=120V, 7.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CVG	-	SMCJ120CA	TVS	Vbr=133..147V, Vrwm=120V, 7.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CVH	-	SMCJ130C	TVS	Vbr=144..176V, Vrwm=130V, 6.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CVJ	-	P4SMA91A	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CVK	-	SMA91A	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.20A, 400W(1ms)	DO-214AC	1d	1a	Lge
CVK	-	SMCJ130CA	TVS	Vbr=144..159V, Vrwm=130V, 7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CVL	-	SMCJ150C	TVS	Vbr=167..204V, Vrwm=150V, 5.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CVM	-	SMA91CA	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.20A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CVM	-	SMCJ150CA	TVS	Vbr=167..185V, Vrwm=150V, 6.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CVN	-	SMCJ160C	TVS	Vbr=178..218V, Vrwm=160V, 5.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CVP	-	SMAJ45CA	TVS	Vrwm=45V, Vbr=50.0..55.3V, 5.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CVP	-	SMCJ160CA	TVS	Vbr=178..197V, Vrwm=160V, 5.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CVQ	-	SMCJ170C	TVS	Vbr=189..231V, Vrwm=170V, 4.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CVR	-	SMCJ170CA	TVS	Vbr=189..209V, Vrwm=170V, 5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CVS	-	SMCJ188CA	TVS	Vbr=209..231V, Vrwm=188V, 4.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CVT	-	SMCJ188C	TVS	Vbr=209..255V, Vrwm=188V, 4.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CW	-	BZX384B36-V-G	Zener diode	36V±2.5%, Izt=2mA, Zzt=35Ω, 200mW	SOD-323	5d	2m	Vs
CW	-	NZH10C	Zener diode	10V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
CW	-	P4SMA100	TVS	Vbr=95.0..105V, Vrwm=85.5V, 3.1A, 400W(1ms)	DO-214AC	1d	2j	Fag
CW	-	P4SMAJ48	TVS	Vrwm=48V, 4.7A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CW	-	P6SMBJ48C	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CW	-	PZU9.1B2A	Zener diode	9.1V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
CW	-	SMAJ48	TVS	Vrwm=48V, Vbr=53.3..65.1V, 4.7A, 400W(1ms)	DO-214AC	1d	1k	Vs
CW	-	SMBG48C	TVS	Vrwm=48V, Vbr=53.3..67.5V, 7.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CW	-	SMBJ48C	TVS	Vrwm=48V, Vbr=53.3..67.5V, 7.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CW	-	TV04A480K-G	TVS	Vrwm=48.0V, Vbr=53.30..65.10V, Ipp=4.68A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CW	-	TV06B480KB-G	TVS	Vrwm=48.0V, Vbr=53.30..65.10V, Ipp=7.02A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
CWD	-	SMCJ5.0C	TVS	Vbr=6.40..7.82V, Vrwm=5.0V, 156.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWE	-	SMCJ5.0CA	TVS	Vbr=6.40..7.07V, Vrwm=5.0V, 163.0A, 1500W(1ms), Bidir. T	DO-214AB	1ba	1j	Gal
CWF	-	SMCJ6.0C	TVS	Vbr=6.67..8.15V, Vrwm=5.0V, 131.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWG	-	SMCJ6.0CA	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 145.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWH	-	SMCJ6.5C	TVS	Vbr=7.22..8.82V, Vrwm=6.5V, 122.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWJ	-	P4SMA100	TVS	Vbr=90.0..110V, Vrwm=81.0V, 2.9A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CWK	-	SMA100	TVS	Vbr=90.0..110V, Vrwm=81.0V, 2.78A, 400W(1ms)	DO-214AC	1d	1a	Lge
CWK	-	SMCJ6.5CA	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 133.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWL	-	SMCJ7.0C	TVS	Vbr=7.78..9.51V, Vrwm=7.0V, 112.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWM	-	SMA100C	TVS	Vbr=90.0..110V, Vrwm=81.0V, 2.78A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CWM	-	SMCJ7.0CA	TVS	Vbr=7.78..8.60V, Vrwm=7.0V, 125.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWN	-	SMCJ7.5C	TVS	Vbr=8.33..10.2V, Vrwm=7.5V, 104.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWP	-	SMAJ48C	TVS	Vrwm=48V, Vbr=53.3..65.1V, 4.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CWP	-	SMCJ7.5CA	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 116.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CWQ	-	SMCJ8.0C	TVS	Vbr=8.89..10.9V, Vrwm=8.0V, 100.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWR	-	SMCJ8.0CA	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 110.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWS	-	SMCJ8.5C	TVS	Vbr=9.44..11.5V, Vrwm=8.5V, 94.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWT	-	SMCJ8.5CA	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 104.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWU	-	SMCJ9.0C	TVS	Vbr=10.0..12.2V, Vrwm=9.0V, 88.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWV	-	SMCJ9.0CA	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 97.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWW	-	SMCJ10C	TVS	Vbr=11.1..13.6V, Vrwm=10V, 79.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWX	-	SMCJ10CA	TVS	Vbr=11.1..12.3V, Vrwm=10V, 88.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWY	-	SMCJ11C	TVS	Vbr=12.2..14.9V, Vrwm=11V, 74.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CWZ	-	SMCJ11CA	TVS	Vbr=12.2..13.5V, Vrwm=11V, 82.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CX	-	BZX384B39-V-G	Zener diode	39V±2.5%, Izt=2mA, Zzt=40Ω, 200mW	SOD-323	5d	2m	Vs
CX	-	CD214B-T48CA	TVS	Vrwm=48V, Irsm=7.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
CX	-	LMSZ4692T1G	Zener diode	6.46..7.14V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
CX	-	MM1Z4705	Zener diode	17.10..18.90V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
CX	-	MMSZ4692	Zener diode	6.8V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
CX	-	MMSZ4692-F	Zener diode	6.46..7.14V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
CX	-	MMSZ4705	Zener diode	18V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
CX	-	NZH11C	Zener diode	11V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
CX	-	P4SMA100A	TVS	Vbr=95.0..105V, Vrwm=85.5V, 3.1A, 400W(1ms)	DO-214AC	1d	2j	Fag
CX	-	P4SMAJ48A	TVS	Vrwm=48V, 5.2A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CX	-	P6SMBJ48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CX	-	PMF48A	TVS	Vbr=53.3..58.9V, Vrwm=48V, Ipp=2.58A, 200W(1ms)	SOD-123FL	7d	1a	Shp
CX	-	PZU9.1B3A	Zener diode	9.1V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
CX	-	SMA6L48A	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, 7.8A, 600W(1ms)	DO-221AC	7d	2s	Lif
CX	-	SMAJ48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, 5.2A, 400W(1ms)	DO-214AC	1d	1k	Vs
CX	-	SMAJ48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, 5.2A, 400W(1ms)	DO-214AC	1d	1q	Ste
CX	-	SMBG48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CX	-	SMBJ48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
CX	-	SMBJ48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CX	-	SMF48A	ESDP-diode	Vbr=53.3V, Vrwm=48V, Ipp=2.6A, 200W(1ms)	SMF	7d	2y	Vs
CX	-	SMF48A	TVS	Vbr=53.3..58.9V, Vrwm=48V, Ipp=2.6A, 200W(1ms)	SMF	1d	2sa	Lif
CX	-	TV04A480J-G	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=5.17A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CX	-	TV06B480JB-G	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=7.75A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
CXA	-	TPSMA6L48A	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=7.8A, 600W(1ms)	DO-221AC	1d	2s	Lif
CXD	-	SMCJ12C	TVS	Vbr=13.3..16.3V, Vrwm=12V, 68.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXE	-	SMCJ12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, 75.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXF	-	SMCJ13C	TVS	Vbr=14.4..17.6V, Vrwm=13V, 63.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXG	-	SMCJ13CA	TVS	Vbr=14.4..15.9V, Vrwm=13V, 69.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXH	-	SMCJ14C	TVS	Vbr=15.6..19.1V, Vrwm=14V, 58.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXJ	-	P4SMA100A	TVS	Vbr=95.0..105V, Vrwm=85.5V, 3.1A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CXK	-	SMA100A	TVS	Vbr=95.0..105V, Vrwm=85.5V, 2.92A, 400W(1ms)	DO-214AC	1d	1a	Lge
CXK	-	SMCJ14CA	TVS	Vbr=15.6..17.2V, Vrwm=14V, 64.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXL	-	SMCJ15C	TVS	Vbr=16.7..20.4V, Vrwm=15V, 55.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXM	-	SMA100CA	TVS	Vbr=95.0..105V, Vrwm=85.5V, 2.92A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CXM	-	SMCJ15CA	TVS	Vbr=16.7..18.5V, Vrwm=15V, 61.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXN	-	SMCJ16C	TVS	Vbr=17.8..21.8V, Vrwm=16V, 52.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXP	-	SMAJ48CA	TVS	Vrwm=48V, Vbr=53.3..58.9V, 5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CXP	-	SMCJ16CA	TVS	Vbr=17.8..19.7V, Vrwm=16V, 57.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXQ	-	SMCJ17C	TVS	Vbr=18.9..23.1V, Vrwm=17V, 49.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXR	-	SMCJ17CA	TVS	Vbr=18.9..20.9V, Vrwm=17V, 54.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXS	-	SMCJ18C	TVS	Vbr=20.0..24.4V, Vrwm=18V, 46.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXT	-	SMCJ18CA	TVS	Vbr=20.0..22.1V, Vrwm=18V, 51.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXU	-	SMCJ20C	TVS	Vbr=22.2..27.1V, Vrwm=20V, 41.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXV	-	SMCJ20CA	TVS	Vbr=22.2..24.5V, Vrwm=20V, 46.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXW	-	SMCJ22C	TVS	Vbr=24.4..29.8V, Vrwm=22V, 38.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXX	-	SMCJ22CA	TVS	Vbr=24.4..26.9V, Vrwm=22V, 42.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXY	-	SMCJ24C	TVS	Vbr=26.7..32.6V, Vrwm=24V, 34.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CXZ	-	SMCJ24CA	TVS	Vbr=26.7..29.5V, Vrwm=24V, 38.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CY	-	BZX384B43-V-G	Zener diode	43V±2.5%, Izt=2mA, Zzt=45Ω, 200mW	SOD-323	5d	2m	Vs
CY	-	KDZ2.4VVY	Zener diode	2.40..2.60V, Izt=5mA, Zzt=100Ω, 100mW	VSC	7d	1a	Kec
CY	-	LMSZ4693T1G	Zener diode	7.13..7.88V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
CY	-	MM1Z4706	Zener diode	18.05..19.95V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
CY	-	MMSZ4693	Zener diode	7.5V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
CY	-	MMSZ4693-F	Zener diode	7.13..7.88V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
CY	-	MMSZ4706	Zener diode	19V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
CY	-	NZH12B	Zener diode	12V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
CY	-	P4SMA110	TVS	Vbr=99.0..121V, Vrwm=89.2V, 2.7A, 400W(1ms)	DO-214AC	1d	2j	Fag
CY	-	P4SMAJ51	TVS	Vrwm=51V, 4.4A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CY	-	P6SMBJ51C	TVS	Vrwm=51V, Vbr=45.9..56.1V, 6.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CY	-	SMAJ48CA	TVS	Vrwm=48V, Vbr=53.3..58.9V, 5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CY	-	SMAJ51	TVS	Vrwm=51V, Vbr=56.7..69.3V, 4.4A, 400W(1ms)	DO-214AC	1d	1k	Vs
CY	-	SMBG51C	TVS	Vrwm=51V, Vbr=56.7..71.8V, 6.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CY	-	SMBJ51C	TVS	Vrwm=51V, Vbr=56.7..71.8V, 6.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CY	-	TV04A510K-G	TVS	Vrwm=51.0V, Vbr=56.70..69.30V, Ipp=4.39A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CY	-	TV06B510KB-G	TVS	Vrwm=51.0V, Vbr=56.70..69.30V, Ipp=6.59A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
CYD	-	SMCJ26C	TVS	Vbr=28.9..35.3V, Vrwm=26V, 32.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYE	-	SMCJ26CA	TVS	Vbr=28.9..31.9V, Vrwm=26V, 35.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYF	-	SMCJ28C	TVS	Vbr=31.1..38.0V, Vrwm=28V, 30.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYG	-	SMCJ28CA	TVS	Vbr=31.1..34.4V, Vrwm=28V, 33.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYH	-	SMCJ30C	TVS	Vbr=33.3..40.7V, Vrwm=30V, 28.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYJ	-	P4SMA110	TVS	Vbr=99.0..121V, Vrwm=89.2V, 2.7A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CYK	-	SMA110	TVS	Vbr=99.0..121V, Vrwm=89.2V, 2.53A, 400W(1ms)	DO-214AC	1d	1a	Lge
CYK	-	SMCJ30CA	TVS	Vbr=33.3..36.8V, Vrwm=30V, 31.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYL	-	SMCJ33C	TVS	Vbr=36.7..44.9V, Vrwm=33V, 25.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYM	-	SMA110C	TVS	Vbr=99.0..121V, Vrwm=89.2V, 2.53A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CYM	-	SMCJ33CA	TVS	Vbr=36.7..40.6V, Vrwm=33V, 28.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYN	-	SMCJ36C	TVS	Vbr=40.0..48.9V, Vrwm=36V, 23.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYP	-	SMAJ51C	TVS	Vrwm=51V, Vbr=56.7..69.3V, 4.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CYP	-	SMCJ36CA	TVS	Vbr=40.0..44.2V, Vrwm=36V, 25.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYQ	-	SMCJ40C	TVS	Vbr=44.4..54.3V, Vrwm=40V, 21.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYR	-	SMCJ40CA	TVS	Vbr=44.4..49.1V, Vrwm=40V, 23.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYS	-	SMCJ43C	TVS	Vbr=47.8..58.4V, Vrwm=43V, 19.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYT	-	SMCJ43CA	TVS	Vbr=47.8..52.8V, Vrwm=43V, 21.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYU	-	SMCJ45C	TVS	Vbr=50.0..61.1V, Vrwm=45V, 18.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYV	-	SMCJ45CA	TVS	Vbr=50.0..55.3V, Vrwm=45V, 20.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYW	-	SMCJ48C	TVS	Vbr=53.3..65.1V, Vrwm=48V, 17.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYX	-	SMCJ48CA	TVS	Vbr=53.3..58.9V, Vrwm=48V, 19.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYY	-	SMCJ51C	TVS	Vbr=56.7..69.3V, Vrwm=51V, 16.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CYZ	-	SMCJ51CA	TVS	Vbr=56.7..62.7V, Vrwm=51V, 18.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CZ	-	BZT52B7V5S	Zener diode	7.35..7.65V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323FL	7d	1a	Tsc
CZ	-	BZX384B47-V-G	Zener diode	47V±2.5%, Izt=2mA, Zzt=50Ω, 200mW	SOD-323	5d	2m	Vs
CZ	-	CD214B-T51CA	TVS	Vrwm=51V, Irsm=7.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
CZ	-	LMSZ4694T1G	Zener diode	7.79..8.61V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
CZ	-	MM1Z4707	Zener diode	19.0..21.0V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
CZ	-	MM3Z7V5B	Zener diode	7.35..7.65V, Zzt=14Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
CZ	-	MM3Z7V5BW	Zener diode	7.35..7.65V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323FL	7d	1a	Tac
CZ	-	MMSZ4694	Zener diode	8.2V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
CZ	-	MMSZ4694-F	Zener diode	7.79..8.61V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
CZ	-	MMSZ4707	Zener diode	20V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
CZ	-	P4SMA110A	TVS	Vbr=105..116V, Vrwm=94V, 2.8A, 400W(1ms)	DO-214AC	1d	2j	Fag
CZ	-	P4SMAJ51A	TVS	Vrwm=51V, 4.9A, 400W (1ms)	DO-214AC	1d	1a	Lsr
CZ	-	P6SMBJ51CA	TVS	Vrwm=51V, Vbr=45.9..56.1V, 7.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
CZ	-	PMF51A	TVS	Vbr=56.7..62.7V, Vrwm=51V, Ipp=2.43A, 200W(1ms)	SOD-123FL	7d	1a	Shp
CZ	-	SMA6L51A	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, 7.3A, 600W(1ms)	DO-221AC	7d	2s	Lif
CZ	-	SMAJ51A	TVS	Vrwm=51V, Vbr=56.7..62.7V, 4.9A, 400W(1ms)	DO-214AC	1d	1k	Vs
CZ	-	SMBG51CA	TVS	Vrwm=51V, Vbr=56.7..65.2V, 7.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
CZ	-	SMBJ51CA	TVS	Vrwm=51V, Vbr=56.7..65.2V, 7.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
CZ	-	SMBJ51CA	TVS	Vrwm=51V, Vbr=56.7..65.2V, 7.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
CZ	-	SMF51A	ESDP-diode	Vbr=56.7V, Vrwm=51V, Ipp=2.4A, 200W(1ms)	SMF	7d	2y	Vs
CZ	-	SMF51A	TVS	Vbr=56.7..62.7V, Vrwm=51V, Ipp=2.4A, 200W(1ms)	SMF	1d	2sa	Lif
CZ	-	TCMM3Z7V5B	Zener diode	7.5V±2%, Izt=5mA, Zzt=14Ω, 200mW	SOD-323FL	7d	1a	Tac
CZ	-	TV04A510J-G	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=4.85A, 400W(1ms)	DO-214AC	1d	2o	Cmc
CZ	-	TV06B510JB-G	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=7.28A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
CZA	-	TPSMA6L51A	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=7.3A, 600W(1ms)	DO-221AC	1d	2s	Lif
CZD	-	SMCJ54C	TVS	Vbr=60.0..73.3V, Vrwm=54V, 15.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CZE	-	SMCJ54CA	TVS	Vbr=60.0..66.3V, Vrwm=54V, 17.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CZF	-	SMCJ58C	TVS	Vbr=64.4..78.7V, Vrwm=58V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CZG	-	SMCJ58CA	TVS	Vbr=64.4..71.2V, Vrwm=58V, 16.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CZH	-	SMCJ60C	TVS	Vbr=66.7..81.5V, Vrwm=60V, 14.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CZJ	-	P4SMA110A	TVS	Vbr=105..116V, Vrwm=94V, 2.8A, 400W(1ms)	DO-214AC	1d	1a	Tsc
CZK	-	SMA110A	TVS	Vbr=105..116V, Vrwm=94V, 2.63A, 400W(1ms)	DO-214AC	1d	1a	Lge
CZK	-	SMCJ60CA	TVS	Vbr=66.7..73.7V, Vrwm=60V, 15.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CZL	-	SMCJ64C	TVS	Vbr=71.1..86.9V, Vrwm=64V, 13.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CZM	-	SMA110CA	TVS	Vbr=105..116V, Vrwm=94V, 2.63A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
CZM	-	SMCJ64CA	TVS	Vbr=71.1..78.6V, Vrwm=64V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CZN	-	SMCJ70C	TVS	Vbr=77.8..95.1V, Vrwm=70V, 12A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CZP	-	SMAJ51CA	TVS	Vrwm=51V, Vbr=56.7..69.3V, 4.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
CZP	-	SMCJ70CA	TVS	Vbr=77.8..86.0V, Vrwm=70V, 13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CZQ	-	SMCJ75C	TVS	Vbr=83.3..102V, Vrwm=75V, 11.2A, 1500W(1ms), Bidir.a	DO-214AB	1ba	1j	Gal
CZR	-	SMCJ75CA	TVS	Vbr=83.3..92.1V, Vrwm=75V, 12.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
CZS	-	SMCJ78C	TVS	Vbr=86.7..106V, Vrwm=78V, 10.8A, 1500W(1ms), Bidir.a	DO-214AB	1ba	1j	Gal
CZT	-	SMCJ78CA	TVS	Vbr=86.7..95.8V, Vrwm=78V, 11.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CZU	-	SMCJ85C	TVS	Vbr=94.4..115V, Vrwm=85V, 9.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CZV	-	SMCJ85CA	TVS	Vbr=94.4..104V, Vrwm=85V, 10.9A, 1500W(1ms), Bidirectiona	DO-214AB	1ba	1j	Gal
CZW	-	SMCJ90C	TVS	Vbr=100..122V, Vrwm=90V, 9.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CZX	-	SMCJ90CA	TVS	Vbr=100..111V, Vrwm=90V, 10.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CZY	-	SMCJ100C	TVS	Vbr=111..136V, Vrwm=100V, 8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
CZZ	-	SMCJ100CA	TVS	Vbr=111..123V, Vrwm=100V, 9.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Gal
D	-	1SS376	Si-diode	Sw, 300V, 100mA, Vf<1.2V(100mA), 30ns	UMD2	7d	1a	Rhm
D	-	BAS21-03W	Si-diode	Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOD-323	5d	1a	Inf
D	-	GBLC12I	TVS	Vrwm=12V, 1A, 350W(1ms), 0.6pF	SOD-323	5d	1a	Prt
D	-	MM9D7V5	Zener diode	7.13..7.88V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	1n	Wtr
d	-	MMSZ5230BPT	Zener diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 225mW	SOD-523	6d	1a	Chm
D	-	NZ9F4V3ST	Zener diode	4.17..4.43V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	2m	Ons
D	-	NZ9F7V5T	Zener diode	7.13..7.88V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	1n	Ons
D	-	RB551V-30	Si-diode	SBR, 30V, 500mA, Vf<0.47V(500mA)	SOD-323	5d	1a	Rhm
D	au	MMSZ5253BPT	Zener diode	25V±5%, Izt=5mA, Zzt=35Ω, 225mW	SOD-523	6d	1a	Chm
D	aw	UDZS2V7BW	Zener diode	2.69..2.91V, Izt=5mA, Zzt=110Ω, 200mW	SOD-123FL	7d	1a	Tac
d.	-	MMSZ5230SPT	Zener diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 225mW	SOD-523	6d	1a	Chm
D.	au	MMSZ5253SPT	Zener diode	25V±5%, Izt=5mA, Zzt=35Ω, 225mW	SOD-523	6d	1a	Chm
D.0	-	MMSZ5230C-V-G	Zener diode	4.7V±2%, Izt=20mA, Zzt=19Ω, 500mW	SOD-123	5d	1kb	Vs
D.6	-	MMSZ5226C-V-G	Zener diode	3.3V±2%, Izt=20mA, Zzt=28Ω, 500mW	SOD-123	5d	1kb	Vs
D.7	-	MMSZ5227C-V-G	Zener diode	3.6V±2%, Izt=20mA, Zzt=24Ω, 500mW	SOD-123	5d	1kb	Vs
D.8	-	MMSZ5228C-V-G	Zener diode	3.9V±2%, Izt=20mA, Zzt=23Ω, 500mW	SOD-123	5d	1kb	Vs
D.9	-	MMSZ5229C-V-G	Zener diode	4.3V±2%, Izt=20mA, Zzt=22Ω, 500mW	SOD-123	5d	1kb	Vs
D<	-	UDZS3V3BW	Zener diode	3.32..3.53V, Izt=5mA, Zzt=120Ω, 200mW	SOD-123FL	7d	1a	Tac
D=	-	UDZS2V4BW	Zener diode	2.43..2.63V, Izt=5mA, Zzt=100Ω, 200mW	SOD-123FL	7d	1a	Tac
D>	-	UDZS3V0BW	Zener diode	3.01..3.22V, Izt=5mA, Zzt=120Ω, 200mW	SOD-123FL	7d	1a	Tac
D0	-	BZD27C3V6P	Zener diode	3.4..3.8V, Zzt=4Ω, Izt=100mA, 800mW	SOD-123FL	7d	1i	Vs
D0	-	BZX384-C9V1	Zener diode	9.1V±5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	1a	Nxp
D0	-	MMPZ5238BPT	Zener diode	8.265..9.135V, Izt=5mA, Zzt=7Ω, 225mW	SOD-323	5d	1a	Chm
D0	-	MMSZ5230B-V-G	Zener diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 500mW	SOD-123	5d	1kb	Vs
D0	-	TCUDZS3V6B	Zener diode	3.60..3.85V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1a	Tac
D0	-	UDZS3V6B	Zener diode	3.60..3.85V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1a	Tsc
D0	-	UDZS3V6BW	Zener diode	3.60..3.85V, Izt=5mA, Zzt=90Ω, 200mW	SOD-123FL	7d	1a	Tac
D1	-	1N4148W	Si-diode	Sw, Fast, 75V, 300mA, Vf<1V(10mA)	SOD-123FL	7d	1a	Tac
D1	-	3T064AB	Thy-SPD	Vdrm=58V, Vs=77V, Ipp=35A, 80pF	DO-214AA	1d	1a	Mde
D1	-	BZD27C3V9P	Zener diode	3.7..4.1V, Zzt=4Ω, Izt=100mA, 800mW	SOD-123FL	7d	1i	Vs
D1	-	BZX384B51-V-G	Zener diode	51V±2.5%, Izt=2mA, Zzt=60Ω, 200mW	SOD-323	5d	2m	Vs
D1	-	CZRH5226B-G	Zener diode	3.14..3.47V, Zzt=28Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
D1	-	DDZ9678	Zener diode	1.8V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
D1	-	LMSZ5226BT1G	Zener diode	3.14..3.47V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
D1	-	MAZF051	Zener diode	4.8..5.4V, Zzt=60Ω(5mA), 120mW	S-Mini	8d	1a	Pan
D1	-	MAZN051	Zener diode	4.8..5.4V, Zzt=60Ω(5mA), 120mW	SSMini2	7d	1a	Pan
D1	-	MM3Z5226B	Zener diode	3.14..3.47V, Izt=20mA, Zzt=28Ω, 200mW	SOD-323FL	7d	1a	Ext
D1	-	MM3Z5226BH	Zener diode	3.14..3.47V, Izt=20mA, Zzt=28Ω, 300mW	SOD-323	5d	1a	Zow
D1	-	MMBZ5226BV	Zener diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 200mW	SOD-523	6d	1a	Pjt
D1	-	MMSZ5226B-F	Zener diode	3.14..3.47V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr
D1	-	MMSZ5226BWS	Zener diode	3.14..3.47V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
D1	-	NZH15B	Zener diode	15V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
D1	-	OYD3V3T1	Zener diode	3.1...3.5V, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1a	Ouy
D1	-	TCUDZS3V9B	Zener diode	3.89..4.16V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1a	Tac
D1	-	UDZS3V9B	Zener diode	3.89..4.16V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1a	Tsc
D1	-	UDZS3V9BW	Zener diode	3.89..4.16V, Izt=5mA, Zzt=90Ω, 200mW	SOD-123FL	7d	1a	Tac
D10	-	SMBYW04-100	Si-diode	Rectifier, Fast-Recovery, 100V, 4A, Vf<0.71(1A), <35ns	DO-214AB	1d	1q	Ste
D15	-	SMBYW04-150	Si-diode	Rectifier, Fast-Recovery, 150V, 4A, Vf<0.85V(1A), <35ns	DO-214AB	1d	1q	Ste
D2	-	1N4448W	Si-diode	Sw, Fast, 75V, 300mA, Vf<1V(100mA)	SOD-123FL	7d	1a	Tac
D2	-	3T072AB	Thy-SPD	Vdrm=65V, Vs=88V, Ipp=35A, 80pF	DO-214AA	1d	1a	Mde
D2	-	BAP63-03	PIN-diode	RF, 50V, 100mA, 500mW, 0.35pF, 1.17Ω(10mA/100MHz)	SOD-323	5d	1a	Phi
D2	-	BZD27C4V3P	Zener diode	4..4.6V, Zzt=4Ω, Izt=100mA, 800mW	SOD-123FL	7d	1i	Vs
D2	-	BZX384B56-V-G	Zener diode	56V±2.5%, Izt=2mA, Zzt=70Ω, 200mW	SOD-323	5d	2m	Vs
D2	-	CZRH5227B-G	Zener diode	3.42..3.78V, Zzt=24Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
D2	-	LMSZ5227BT1G	Zener diode	3.42..3.78V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
D2	-	MAZF056	Zener diode	5.3..6V, Zzt=40Ω(5mA), 120mW	S-Mini	8d	1a	Pan
D2	-	MAZN056	Zener diode	5.3..6V, Zzt=40Ω(5mA), 120mW	SSMini2	7d	1a	Pan
D2	-	MM3Z5227B	Zener diode	3.42..3.78V, Izt=20mA, Zzt=24Ω, 200mW	SOD-323	5d	1a	Ext
D2	-	MM3Z5245B	Zener diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 200mW	SOD-323FL	7d	1a	Bts
D2	-	MM3Z5245BH	Zener diode	14.25..15.75V, Izt=8.5mA, Zzt=16Ω, 300mW	SOD-323	5d	1a	Zow
D2	-	MMBZ5227BV	Zener diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 200mW	SOD-523	6d	1a	Pjt
D2	-	MMSZ5227B-F	Zener diode	3.42..3.78V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
D2	-	MMSZ5227BWS	Zener diode	3.42..3.78V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
D2	-	MSCD022	Si-diode	SBR, 20V, 0.2A, Vf<0.45V(0.2A)	0805	14d	1v	Zow
D2	-	NZH16C	Zener diode	16V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
D2	-	OYD3V6T1	Zener diode	3.4...3.8V, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1a	Ouy
D2	-	RKZ3.6B2KK	Zener diode	3.55..3.80V, Izt=5mA, Zzt=130Ω, 150mW	SFP	7d	1a	Ren
D2	-	RKZ3.6B2KL	Zener diode	3.55..3.80V, Izt=5mA, Zzt=130Ω, 100mW	EFP	7d	1a	Ren
D2	-	TCUDZS4V3B	Zener diode	4.17..4.43V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1a	Tac
D2	-	UDZS4V3B	Zener diode	4.17..4.43V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1a	Tsc
D2	-	UDZS4V3BW	Zener diode	4.17..4.43V, Izt=5mA, Zzt=90Ω, 200mW	SOD-123FL	7d	1a	Tac
D20	-	SMBYW04-200	Si-diode	Rectifier, Fast-Recovery, 200V, 4A, Vf<0.91V(1A), <35ns	DO-214AB	1d	1q	Ste
D3	-	1N914BW	Si-diode	Sw, Fast, 75V, 300mA, Vf<1V(100mA)	SOD-123FL	7d	1a	Tac
D3	-	3T080AB	Thy-SPD	Vdrm=75V, Vs=98V, Ipp=35A, 60pF	DO-214AA	1d	1a	Mde
D3	-	BAP65-03	PIN-diode	RF, 30V, 100mA, 500mW, 0.61pF, 0.3Ω(100mA/100MHz)	SOD-323	5d	1a	Phi
D3	-	BZD27C4V7P	Zener diode	4.4..5V, Zzt=3Ω, Izt=100mA, 800mW	SOD-123FL	7d	1i	Vs
D3	-	BZX384B62-V-G	Zener diode	62V±2.5%, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	2m	Vs
D3	-	CZRH5228B-G	Zener diode	3.71..4.1V, Zzt=23Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
D3	-	LMSZ5228BT1G	Zener diode	3.71..4.1V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
D3	-	MM3Z5228B	Zener diode	3.71..4.10V, Izt=20mA, Zzt=23Ω, 200mW	SOD-323	5d	1a	Ext
D3	-	MM3Z5266B	Zener diode	68V±5%, Izt=1.8mA, Zzt=230Ω, 200mW	SOD-323FL	7d	1a	Bts
D3	-	MM3Z5266BH	Zener diode	64.6..71.4V, Izt=1.8mA, Zzt=230Ω, 300mW	SOD-323	5d	1a	Zow
D3	-	MMBZ5228BV	Zener diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 200mW	SOD-523	6d	1a	Pjt
D3	-	MMSZ5228B-F	Zener diode	3.71..4.10V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr
D3	-	MMSZ5228BWS	Zener diode	3.71..4.10V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
D3	-	NZH18C	Zener diode	18V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
D3	-	OYD3V9T1	Zener diode	3.7...4.1V, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1a	Ouy
D3	-	TCUDZS4V7B	Zener diode	4.55..4.75V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Tac
D3	-	UDZS4V7B	Zener diode	4.55..4.75V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Tsc
D3	-	UDZS4V7BW	Zener diode	4.55..4.75V, Izt=5mA, Zzt=80Ω, 200mW	SOD-123FL	7d	1a	Tac
D4	-	3T110AB	Thy-SPD	Vdrm=90V, Vs=130V, Ipp=35A, 60pF	DO-214AA	1d	1a	Mde
D4	-	BZD27C5V1P	Zener diode	4.8..5.4V, Zzt=3Ω, Izt=100mA, 800mW	SOD-123FL	7d	1i	Vs
D4	-	BZX384B68-V-G	Zener diode	68V±2.5%, Izt=2mA, Zzt=90Ω, 200mW	SOD-323	5d	2m	Vs
D4	-	CZRH5229B-G	Zener diode	4.09..4.52V, Zzt=22Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
D4	-	LMSZ5229BT1G	Zener diode	4.09..4.52V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
D4	-	MM1Z5226B	Zener diode	3.14..3.47V, Izt=20mA, Zzt=28Ω, 500mW	SOD-323FL	7d	1a	Eic
D4	-	MM1Z5226BH	Zener diode	3.14..3.47V, Izt=20mA, Zzt=28Ω, 500mW	SOD-123	5d	1a	Zow
D4	-	MM3Z5229B	Zener diode	4.09..4.52V, Izt=20mA, Zzt=22Ω, 200mW	SOD-323	5d	1a	Ext
D4	-	MMBZ5229BV	Zener diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOD-523	6d	1a	Pjt
D4	-	MMSZ5226B	Zener diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 500mW	SOD-123	5d	1a	Eic
D4	-	MMSZ5229B-F	Zener diode	4.09..4.52V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr
D4	-	MMSZ5229BWS	Zener diode	4.09..4.52V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
D4	-	MSCD024	Si-diode	SBR, 40V, 0.2A, Vf<0.5V(0.2A)	0805	14d	1v	Zow
D4	-	NZH20C	Zener diode	20V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
D4	-	OYD4V3T1	Zener diode	4...4.6V, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1a	Ouy
D4	-	RKZ3.9B2KK	Zener diode	3.87..4.10V, Izt=5mA, Zzt=130Ω, 150mW	SFP	7d	1a	Ren
D4	-	RKZ3.9B2KL	Zener diode	3.87..4.10V, Izt=5mA, Zzt=130Ω, 100mW	EFP	7d	1a	Ren
D4	-	TCUDZS5V1B	Zener diode	4.98..5.20V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323FL	7d	1a	Tac
D4	-	UDZS5V1B	Zener diode	4.98..5.20V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323FL	7d	1a	Tsc
D4	-	UDZS5V1BW	Zener diode	4.98..5.20V, Izt=5mA, Zzt=60Ω, 200mW	SOD-123FL	7d	1a	Tac
D5	-	3T130AB	Thy-SPD	Vdrm=120V, Vs=160V, Ipp=35A, 40pF	DO-214AA	1d	1a	Mde
D5	-	BZD27C5V6P	Zener diode	5.2..6V, Zzt=2Ω, Izt=100mA, 800mW	SOD-123FL	7d	1i	Vs
D5	-	BZX384B75-V-G	Zener diode	75V±2.5%, Izt=2mA, Zzt=95Ω, 200mW	SOD-323	5d	2m	Vs
D5	-	BZX384-C5V1	Zener diode	5.1V±5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Nxp
D5	-	BZX584B8V2	Zener diode	8.04..8.36V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523FL	7d	1a	Tac
D5	-	CZRH5230B-G	Zener diode	4.47..4.94V, Zzt=19Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
D5	-	LMSZ5230BT1G	Zener diode	4.47..4.94V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
D5	-	MM1Z5245B	Zener diode	14.25..15.75V, Izt=8.5mA, Zzt=16Ω, 500mW	SOD-323FL	7d	1a	Eic
D5	-	MM1Z5245BH	Zener diode	14.25..15.75V, Izt=8.5mA, Zzt=16Ω, 500mW	SOD-123	5d	1a	Zow
D5	-	MM3Z5230B	Zener diode	4.47..4.94V, Izt=20mA, Zzt=19Ω, 200mW	SOD-323	5d	1a	Ext
D5	-	MM5Z8V2B	Zener diode	8.04..8.36V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523FL	7d	1a	Tac
D5	-	MMBZ5230BV	Zener diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 200mW	SOD-523	6d	1a	Pjt
D5	-	MMSZ5230B-F	Zener diode	4.47..4.94V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr
D5	-	MMSZ5230BWS	Zener diode	4.47..4.94V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
D5	-	MMSZ5245B	Zener diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 500mW	SOD-123	5d	1a	Eic
D5	-	NZH22C	Zener diode	22V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
D5	-	OYD4V7T1	Zener diode	4.4...5V, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1a	Ouy
D5	-	SMBYW04-50	Si-diode	Rectifier, Fast-Recovery, 50V, 4A, Vf<0.65V(1A), <35ns	DO-214AB	1d	1q	Ste
D5	-	TCUDZS5V6B	Zener diode	5.49..5.73V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1a	Tac
D5	-	UDZS5V6B	Zener diode	5.49..5.73V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1a	Tsc
D5	-	UDZS5V6BW	Zener diode	5.49..5.73V, Izt=5mA, Zzt=40Ω, 200mW	SOD-123FL	7d	1a	Tac
D6	-	3T150AB	Thy-SPD	Vdrm=140V, Vs=180V, Ipp=35A, 40pF	DO-214AA	1d	1a	Mde

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
D6	-	BZD27C6V2P	Zener diode	5.8..6.6V, Zzt=2Ω, Izt=100mA, 800mW	SOD-123FL	7d	1i	Vs
D6	-	BZX384-C5V6	Zener diode	5.6V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Nxp
D6	-	MM1Z5266B	Zener diode	64.60..71.40V, Izt=1.8mA, Zzt=230Ω, 500mW	SOD-323FL	7d	1a	Eic
D6	-	MM1Z5266BH	Zener diode	64.6..71.4V, Izt=1.8mA, Zzt=230Ω, 500mW	SOD-123	5d	1a	Zow
D6	-	MMSZ5226B-V-G	Zener diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 500mW	SOD-123	5d	1kb	Vs
D6	-	MMSZ5266B	Zener diode	68V±5%, Izt=1.8mA, Zzt=230Ω, 500mW	SOD-123	5d	1a	Eic
D6	-	NZH24C	Zener diode	24V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
D6	-	RKZ4.3B2KK	Zener diode	4.15..4.34V, Izt=5mA, Zzt=130Ω, 150mW	SFP	7d	1a	Ren
D6	-	RKZ4.3B2KL	Zener diode	4.15..4.34V, Izt=5mA, Zzt=130Ω, 100mW	EFP	7d	1a	Ren
D6	-	TCUDZS6V2B	Zener diode	6.06..6.33V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1a	Tac
D6	-	UDZS6V2B	Zener diode	6.06..6.33V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1a	Tsc
D6	-	UDZS6V2BW	Zener diode	6.06..6.33V, Izt=5mA, Zzt=40Ω, 200mW	SOD-123FL	7d	1a	Tac
D63	-	CMDD6263	Si-diode	Sw, 70V, 15mA, 250mW, Vf<0.41V(1mA), <2pF	SOD-323	5d	1a	Cen
D7	-	3T180AB	Thy-SPD	Vdrm=160V, Vs=220V, Ipp=35A, 40pF	DO-214AA	1d	1a	Mde
D7	-	BZD27C6V8P	Zener diode	6.4..7.2V, Zzt=1Ω, Izt=100mA, 800mW	SOD-123FL	7d	1i	Vs
D7	-	BZX384-C6V8	Zener diode	6.8V±5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	1a	Nxp
D7	-	MMSZ5227B-V-G	Zener diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 500mW	SOD-123	5d	1kb	Vs
D7	-	NZH27C	Zener diode	27V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
D7	-	TCUDZS6V8B	Zener diode	6.65..6.93V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tac
D7	-	UDZS6V8B	Zener diode	6.65..6.93V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tsc
D7	-	UDZS6V8BW	Zener diode	6.65..6.93V, Izt=5mA, Zzt=30Ω, 200mW	SOD-123FL	7d	1a	Tac
D76	-	BAR18J	Si-diode	Schottky, 70V, 50mA, 250mW, <2pF	SOD-323	5d	1a	Ste
D8	-	3T230AB	Thy-SPD	Vdrm=190V, Vs=260V, Ipp=35A, 30pF	DO-214AA	1d	1a	Mde
D8	-	BZD27C7V5P	Zener diode	7..7.9 1V, Zzt=2Ω, Izt=100mA, 800mW	SOD-123FL	7d	1i	Vs
D8	-	BZT52C3V6WT	Zener diode	3.42..3.78V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Ttr
D8	-	BZX384-C7V5	Zener diode	7.5V±5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	1a	Nxp
D8	-	MM5Z3V6	Zener diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Eic
D8	-	MM5Z3V6H	Zener diode	3.4..3.8V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Zow
D8	-	MMSZ5228B-V-G	Zener diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 500mW	SOD-123	5d	1kb	Vs
D8	-	TCUDZS7V5B	Zener diode	7.28..7.60V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tac
D8	-	UDZS7V5B	Zener diode	7.28..7.60V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tsc
D8	-	UDZS7V5BW	Zener diode	7.28..7.60V, Izt=5mA, Zzt=30Ω, 200mW	SOD-123FL	7d	1a	Tac
D86	-	BAT54J	Si-diode	SBR, 30V, 200mA, Vf<1V(100mA), 10pF, 5ns	SOD-323	5d	1a	Ste
D9	-	3T260AB	Thy-SPD	Vdrm=220V, Vs=300V, Ipp=35A, 30pF	DO-214AA	1d	1a	Mde
D9	-	BZD27C8V2P	Zener diode	7.7..8.7V, Zzt=1Ω, Izt=100mA, 800mW	SOD-123FL	7d	1i	Vs
D9	-	BZT52C43WT	Zener diode	40.85..45.15V, Izt=5mA, Zzt=150Ω, 200mW	SOD-523	6d	1a	Ttr
D9	-	BZX384-C8V2	Zener diode	8.2V±5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	1a	Nxp
D9	-	MM5Z43H	Zener diode	40..46V, Izt=1mA, Zzt=150Ω, 200mW	SOD-523	6d	1a	Zow
D9	-	MM5Z43V	Zener diode	43V±5%, Izt=2mA, Zzt=150Ω, 200mW	SOD-523	6d	1a	Eic
D9	-	MMSZ5229B-V-G	Zener diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 500mW	SOD-123	5d	1kb	Vs
D9	-	NZH13B	Zener diode	13V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
D9	-	RKZ4.7B2KK	Zener diode	4.55..4.75V, Izt=5mA, Zzt=130Ω, 150mW	SFP	7d	1a	Ren
D9	-	RKZ4.7B2KL	Zener diode	4.55..4.75V, Izt=5mA, Zzt=130Ω, 100mW	EFP	7d	1a	Ren
D9	-	TCUDZS8V2B	Zener diode	8.02..8.36V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tac
D9	-	UDZS8V2B	Zener diode	8.02..8.36V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tsc
D9	-	UDZS8V2BW	Zener diode	8.02..8.36V, Izt=5mA, Zzt=30Ω, 200mW	SOD-123FL	7d	1a	Tac
DA	-	3T310AB	Thy-SPD	Vdrm=275V, Vs=350V, Ipp=35A, 30pF	DO-214AA	1d	1a	Mde
DA	-	BZX384-C11	Zener diode	11V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Nxp
DA	-	LMSZ4708T1G	Zener diode	20.9..23.1V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
DA	-	MM1Z4708	Zener diode	20.90..23.10V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
DA	-	MMSZ4708	Zener diode	22V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
DA	-	MMSZ4708	Zener diode	22V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
DA	-	MMSZ4708-F	Zener diode	20.9..23.1V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
DA	-	NZH30C	Zener diode	30V±5%, If=250mA, 500mW	SOD-123FL	7d	1a	Phi
DA	-	S1DA	Si-diode	Rectifier, 200V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1k	Vs
DA	-	SD862-04	Si-diode	SBD, Sw, 40V, 2A, Vf<0.59V(2A)	SD	7d	2p	Fji
DA	-	TCUDZS9V1B	Zener diode	8.85..9.23V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tac
DA	-	TV06B800KB-G	TVS	Vrwm=80.0V, Vbr=88.96..108.80V, Ipp=4.19A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DA	-	UDZS9V1B	Zener diode	8.85..9.23V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tsc
DA	-	UDZS9V1BW	Zener diode	8.85..9.23V, Izt=5mA, Zzt=30Ω, 200mW	SOD-123FL	7d	1a	Tac
DA	-	ZMV829	C-diode	VHF/UHF-tuning, 25V, 330mW, 8.2pF(2V), ΔC=±20%	SOD-323	5d	1a	Zx
DB	-	3T350AB	Thy-SPD	Vdrm=300V, Vs=400V, Ipp=35A, 30pF	DO-214AA	1d	1a	Mde
DB	-	BZX384-C12	Zener diode	12V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Nxp
DB	-	MM1Z4709	Zener diode	22.80..25.20V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
DB	-	MMSZ4709	Zener diode	24V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
DB	-	SD863-04	Si-diode	SBD, Sw, 40V, 3A, Vf<0.59V(3A)	SD	7d	2p	Fji
DB	-	TCUDZS10VB	Zener diode	9.77..10.21V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323FL	7d	1a	Tac
DB	-	TV06B800JB-G	TVS	Vrwm=80.0V, Vbr=98.80..97.60V, Ipp=4.63A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DB	-	UDZS10B	Zener diode	9.77..10.21V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323FL	7d	1a	Tsc
DB	-	UDZS10VBW	Zener diode	9.77..10.21V, Izt=5mA, Zzt=20Ω, 200mW	SOD-123FL	7d	1a	Tac

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
DB	-	ZMV830	C-diode	VHF/UHF-tuning, 25V, 330mW, 10pF(2V), ΔC=±20%	SOD-323	5d	1a	Zx
DBB	-	SMAJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 38.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
DBC	-	SMAJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 35.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
DBH	-	SMAJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 27.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
DBK	-	SMAJ12CA	TVS	Vrwm=12V, Vbr=13.3..14.7V, 20.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
DBQ	-	SMAJ18CA	TVS	Vrwm=18V, Vbr=20.0..22.1V, 13.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
DBR	-	SMAJ20CA	TVS	Vrwm=20V, Vbr=22.2..24.5V, 12.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
DBS	-	SMAJ22CA	TVS	Vrwm=22V, Vbr=24.4..26.9V, 11.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
DBT	-	SMAJ24CA	TVS	Vrwm=24V, Vbr=26.7..29.5V, 10.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
DBU	-	SMAJ26CA	TVS	Vrwm=26V, Vbr=28.9..31.9V, 9.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
DBZ	-	SMAJ40CA	TVS	Vrwm=40V, Vbr=44.4..49.1V, 6.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
DC	-	3T400AB	Thy-SPD	Vdrm=360V, Vs=450V, Ipp=35A, 30pF	DO-214AA	1d	1a	Mde
DC	-	BZT52H-B2V4	Zener diode	2.4V±2%, Izt=5mA, Zzt=85Ω, 375mW	SOD-123FL	7d	1a	Phi
DC	-	BZX384-C13	Zener diode	13V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Nxp
DC	-	GBLC12CI	TVS	Vrwm=12V, 1A, 350W(1ms), 0.6pF, Bidir.	SOD-323	5ba	1e	Prt
DC	-	LMSZ4695T1G	Zener diode	8.27..9.14V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
DC	-	MM1Z4710	Zener diode	23.75..26.25V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
DC	-	MMSZ4695	Zener diode	8.7V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
DC	-	MMSZ4695-F	Zener diode	8.27..9.14V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
DC	-	MMSZ4710	Zener diode	25V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
DC	-	SD863-06	Si-diode	SBD, Sw, 60V, 3A, Vf<0.62V(3A)	SD	7d	2p	Fji
DC	-	TCUDZS11VB	Zener diode	10.76..11.22V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323FL	7d	1a	Tac
DC	-	UDZS11B	Zener diode	10.76..11.22V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323FL	7d	1a	Tsc
DC	-	UDZS11VBW	Zener diode	10.76..11.22V, Izt=5mA, Zzt=20Ω, 200mW	SOD-123FL	7d	1a	Tac
DC	-	ZMV831	C-diode	VHF/UHF-tuning, 25V, 330mW, 15pF(2V), ΔC=±20%	SOD-323	5d	1a	Zx
DD	-	BZT52H-B2V7	Zener diode	2.7V±2%, Izt=5mA, Zzt=83Ω, 375mW	SOD-123FL	7d	1a	Phi
DD	-	BZX384-C15	Zener diode	15V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Nxp
DD	-	KDZ27B	Zener diode	27V±2.5%, 10mA, 1W	PMDU	7d	1s	Rhm
DD	-	LMSZ4696T1G	Zener diode	8.65..9.56V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
DD	-	MM1Z4711	Zener diode	25.65..28.35V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
DD	-	MMSZ4696	Zener diode	9.1V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
DD	-	MMSZ4696-F	Zener diode	8.65..9.56V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
DD	-	MMSZ4711	Zener diode	27V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
DD	-	P4SMA120	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 400W(1ms)	DO-214AC	1d	2j	Fag
DD	-	P6SMBJ54C	TVS	Vrwm=54V, Vbr=60.0..76.0V, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DD	-	SD863-10	Si-diode	SBD, Sw, 100V, 3A, Vf<0.84V(3A)	SD	7d	2p	Fji
DD	-	SM6T6V8	TVS	Vrwm=5.8V, Vbr=6.45..7.14V, 57A, 600W(1ms)	DO-214AA	1d	1q	Ste
DD	-	SMBG54C	TVS	Vrwm=54V, Vbr=60.0..76.0V, 6.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DD	-	SMBJ54C	TVS	Vrwm=54V, Vbr=60.0..76.0V, 6.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DD	-	TV06B540KB-G	TVS	Vrwm=54.0V, Vbr=60.0..73.30V, Ipp=6.23A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DD	-	ZMV832	C-diode	VHF/UHF-tuning, 25V, 330mW, 22pF(2V), ΔC=±20%	SOD-323	5d	1a	Zx
DDD	-	SMLJ5.0C	TVS	Vrwm=5.0V, Vbr=6.40..7.30V, Ipp=312.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDE	-	3.0SMCJ5.0CA	TVS	Vbr=6.4..7.25V, Vrwm=5.0V, 326A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DDE	-	SMDJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=326.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DDE	-	SMDJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=326.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDE	-	SMLJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=326.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDEH	-	SMDJ5.0CA-HRA	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=326.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDF	-	SMLJ6.0C	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, Ipp=263.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDG	-	3.0SMCJ6.0CA	TVS	Vbr=6.67..7.67V, Vrwm=6.0V, 291.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DDG	-	SMDJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=291.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDG	-	SMDJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=291.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DDG	-	SMLJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=291.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDGH	-	SMDJ6.0CA-HRA	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=291.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDH	-	SMLJ6.5C	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, Ipp=243.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDJ	-	1.5SMC6.8	TVS	Vrwm=5.5V, Vbr=6.12..7.48V, Ipp=139A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DDK	-	3.0SMCJ6.5CA	TVS	Vbr=7.22..8.30V, Vrwm=6.5V, 267.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DDK	-	SMDJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=267.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DDK	-	SMDJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=267.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDK	-	SMLJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=267.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDKH	-	SMDJ6.5CA-HRA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=267.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDL	-	SMLJ7.0C	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=225.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDM	-	3.0SMCJ7.0CA	TVS	Vbr=7.78..8.95V, Vrwm=7.0V, 250A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DDM	-	SMDJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=250.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDM	-	SMDJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=250.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DDM	-	SMLJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=250.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDMH	-	SMDJ7.0CA-HRA	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=250.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDN	-	SMLJ7.5C	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, Ipp=209.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDP	-	3.0SMCJ7.5CA	TVS	Vbr=8.33..9.58V, Vrwm=7.5V, 232.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DDP	-	SMDJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=232.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DDP	-	SMDJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=232.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
DDP	-	SMLJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=232.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDP	-	TPSMC6.8	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 139A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DDPH	-	SMDJ7.5CA-HRA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=232.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDQ	-	SMLJ8.0C	TVS	Vrwm=8.0V, Vbr=8.89..10.9V, Ipp=200.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDR	-	3.0SMCJ8.0CA	TVS	Vbr=8.89..10.23V, Vrwm=8.0V, 220.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DDR	-	SMDJ8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=220.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDR	-	SMDJ8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=220.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DDR	-	SMLJ8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=220.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDRH	-	SMDJ8.0CA-HRA	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=220.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDS	-	SMLJ8.5C	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, Ipp=188.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDT	-	3.0SMCJ8.5CA	TVS	Vbr=9.44..10.82V, Vrwm=8.5V, 208.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DDT	-	SMDJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.40V, Ipp=208.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDT	-	SMDJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.40V, Ipp=208.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DDT	-	SMLJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, Ipp=208.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDTH	-	SMDJ8.5CA-HRA	TVS	Vrwm=8.5V, Vbr=9.44..10.40V, Ipp=208.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDU	-	SMLJ9.0C	TVS	Vrwm=9.0V, Vbr=10.0..12.2V, Ipp=177.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDV	-	3.0SMCJ9.0CA	TVS	Vbr=10.0..11.5V, Vrwm=9.0V, 194.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DDV	-	SMDJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=194.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDV	-	SMDJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=194.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DDV	-	SMLJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, Ipp=194.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDVH	-	SMDJ9.0CA-HRA	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=194.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDW	-	SMLJ10C	TVS	Vrwm=10V, Vbr=11.1..13.6V, Ipp=159.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDX	-	3.0SMCJ10CA	TVS	Vbr=11.1..12.8V, Vrwm=10V, 176.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DDX	-	SMDJ10CA	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=176.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDX	-	SMDJ10CA	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=176.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DDX	-	SMLJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.3V, Ipp=176.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDXH	-	SMDJ10CA-HRA	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=176.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDY	-	SMLJ11C	TVS	Vrwm=11V, Vbr=12.2..14.9V, Ipp=149.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDZ	-	3.0SMCJ11CA	TVS	Vbr=12.2..14.0V, Vrwm=11V, 184.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DDZ	-	SMDJ11CA	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=164.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DDZ	-	SMDJ11CA	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=164.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DDZ	-	SMLJ11CA	TVS	Vrwm=11V, Vbr=12.2..13.5V, Ipp=164.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DDZH	-	SMDJ11CA-HRA	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=164.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DE	-	BZT52H-B3V0	Zener diode	3.0V±2%, Izt=5mA, Zzt=95Ω, 375mW	SOD-123FL	7d	1a	Phi
DE	-	BZX384-C16	Zener diode	16V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Nxp
DE	-	CD214B-T54CA	TVS	Vrwm=54V, Irsm=6.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
DE	-	LMSZ4697T1G	Zener diode	9.5..10.5V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
DE	-	MM1Z4712	Zener diode	26.60..29.40V, Izt=10mA, 500mW	SOD-123FL	7d	1a	Sme
DE	-	MMSZ4697	Zener diode	10V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
DE	-	MMSZ4697-F	Zener diode	9.5..10.5V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
DE	-	MMSZ4712	Zener diode	28V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
DE	-	P4SMA120A	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 400W(1ms)	DO-214AC	1d	2j	Fag
DE	-	P6SMBJ54CA	TVS	Vrwm=54V, Vbr=60.0..76.0V, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DE	-	SM6T6V8A	TVS	Vrwm=5.8V, Vbr=6.45..7.14V, 57A, 600W(1ms)	DO-214AA	1d	1q	Mde
DE	-	SMBG54CA	TVS	Vrwm=54V, Vbr=60.0..69.0V, 6.9A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DE	-	SMBJ54CA	TVS	Vrwm=54V, Vbr=60.0..69.0V, 6.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
DE	-	SMBJ54CA	TVS	Vrwm=54V, Vbr=60.0..69.0V, 6.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DE	-	SMF54A	TVS	Vbr=60.0..66.3V, Vrwm=54V, Ipp=2.3A, 200W(1ms)	SMF	1d	2sa	Lif
DE	-	TCUDZS12VB	Zener diode	11.74..12.24V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323FL	7d	1a	Tac
DE	-	TV04A301J-G	TVS	Vrwm=300.0V, Vbr=335.0..371.0V, Ipp=0.82A, 400W(1ms)	DO-214AC	1d	2o	Cmc
DE	-	TV06B540JB-G	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=6.89A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DE	-	UDZS12B	Zener diode	11.74..12.24V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323FL	7d	1a	Tsc
DE	-	UDZS12VBW	Zener diode	11.74..12.24V, Izt=5mA, Zzt=20Ω, 200mW	SOD-123FL	7d	1a	Tac
DE	-	ZMV833	C-diode	VHF/UHF-tuning, 25V, 330mW, 33pF(2V), ΔC=±20%	SOD-323	5d	1a	Zx
DED	-	SMLJ12C	TVS	Vrwm=12V, Vbr=13.3..16.3V, Ipp=136.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DEE	-	3.0SMCJ12CA	TVS	Vbr=13.3..15.3V, Vrwm=12V, 150.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DEE	-	SMDJ12CA	TVS	Vrwm=12V, Vbr=13.30..14.70V, Ipp=150.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DEE	-	SMDJ12CA	TVS	Vrwm=12V, Vbr=13.30..14.70V, Ipp=150.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DEE	-	SMLJ12CA	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=150.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DEEH	-	SMDJ12CA-HRA	TVS	Vrwm=12.0V, Vbr=13.30..14.70V, Ipp=150.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DEF	-	SMLJ13C	TVS	Vrwm=13V, Vbr=14.4..17.6V, Ipp=126.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DEG	-	1.5SMC15CA	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, Ipp=71A, 1500W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
DEG	-	3.0SMCJ13CA	TVS	Vbr=14.4..16.5V, Vrwm=13V, 139.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DEG	-	SMDJ13CA	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=139.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DEG	-	SMDJ13CA	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=139.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DEG	-	SMLJ13CA	TVS	Vrwm=13V, Vbr=14.4..15.9V, Ipp=139.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DEGH	-	SMDJ13CA-HRA	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=139.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DEH	-	SMLJ14C	TVS	Vrwm=14V, Vbr=15.6..19.1V, Ipp=116.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DEJ	-	1.5SMC6.8A	TVS	Vrwm=5.8V, Vbr=6.45..7.14 V, Ipp=143A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DEK	-	3.0SMCJ14CA	TVS	Vbr=15.6..17.9V, Vrwm=14V, 129.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
DEK	-	SMDJ14CA	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=129.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DEK	-	SMDJ14CA	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=129.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DEK	-	SMLJ14CA	TVS	Vrwm=14V, Vbr=15.6..17.2V, Ipp=129.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DEKH	-	SMDJ14CA-HRA	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=129.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DEL	-	SMLJ15C	TVS	Vrwm=15V, Vbr=16.7..20.4V, Ipp=111.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DEM	-	3.0SMCJ15CA	TVS	Vbr=16.7..19.2V, Vrwm=15V, 123.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DEM	-	SMDJ15CA	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=123.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DEM	-	SMDJ15CA	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=123.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DEM	-	SMLJ15CA	TVS	Vrwm=15V, Vbr=16.7..18.5V, Ipp=123.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DEMH	-	SMDJ15CA-HRA	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=123.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DEN	-	SMLJ16C	TVS	Vrwm=16V, Vbr=17.8..21.8V, Ipp=104.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DEP	-	3.0SMCJ16CA	TVS	Vbr=17.8..20.5V, Vrwm=16V, 115.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DEP	-	SMDJ16CA	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=115.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DEP	-	SMDJ16CA	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=115.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DEP	-	SMLJ16CA	TVS	Vrwm=16V, Vbr=17.8..19.7V, Ipp=115.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DEP	-	TPSMC6.8A	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 143A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DEPH	-	SMDJ16CA-HRA	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=115.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DEQ	-	SMLJ17C	TVS	Vrwm=17V, Vbr=18.9..23.1V, Ipp=98.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DER	-	3.0SMCJ17CA	TVS	Vbr=18.9..21.7V, Vrwm=17V, 106.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DER	-	SMDJ17CA	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=108.7A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DER	-	SMDJ17CA	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=108.7A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DER	-	SMLJ17CA	TVS	Vrwm=17V, Vbr=18.9..20.9V, Ipp=106.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DERH	-	SMDJ17CA-HRA	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=108.7A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DES	-	SMLJ18C	TVS	Vrwm=18V, Vbr=20.0..24.4V, Ipp=93.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DET	-	SMDJ18CA	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=102.7A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DET	-	SMDJ18CA	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=102.7A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DET	-	SMLJ18CA	TVS	Vrwm=18V, Vbr=20.0..22.1V, Ipp=102.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DETH	-	SMDJ18CA-HRA	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=102.7A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DEU	-	SMLJ20C	TVS	Vrwm=20V, Vbr=22.2..27.1V, Ipp=83.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DEV	-	3.0SMCJ20CA	TVS	Vbr=22.2..25.5V, Vrwm=20V, 92.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DEV	-	SMDJ20CA	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=92.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DEV	-	SMDJ20CA	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=92.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DEV	-	SMLJ20CA	TVS	Vrwm=20V, Vbr=22.2..24.5V, Ipp=92.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DEVH	-	SMDJ20CA-HRA	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=92.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DEW	-	SMLJ22C	TVS	Vrwm=22V, Vbr=24.4..29.8V, Ipp=76.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DEX	-	3.0SMCJ22CA	TVS	Vbr=24.4..28.0V, Vrwm=22V, 84.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DEX	-	SMDJ22CA	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=84.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DEX	-	SMDJ22CA	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=84.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DEX	-	SMLJ22CA	TVS	Vrwm=22V, Vbr=24.4..26.9V, Ipp=84.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DEXH	-	SMDJ22CA-HRA	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=84.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DEY	-	SMLJ24C	TVS	Vrwm=24V, Vbr=26.7..32.6V, Ipp=69.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DEZ	-	3.0SMCJ24CA	TVS	Vbr=26.7..30.7V, Vrwm=24V, 77.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DEZ	-	SMDJ24CA	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=77.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DEZ	-	SMDJ24CA	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=77.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DEZ	-	SMLJ24CA	TVS	Vrwm=24V, Vbr=26.7..29.5V, Ipp=77.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DEZH	-	SMDJ24CA-HRA	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=77.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DF	-	BZT52H-B3V3	Zener diode	3.3V±2%, Izt=5mA, Zzt=95Ω, 375mW	SOD-123FL	7d	1a	Phi
DF	-	BZX384-C18	Zener diode	18V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Nxp
DF	-	KDZ8.2FV	Zener diode	7.70..8.70V, Izt=5mA, Zzt=20Ω, 100mW	TFSC	7d	1a	Kec
DF	-	LMSZ4698T1G	Zener diode	10.45..11.55V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
DF	-	MAZD062	Zener diode	5.8..6.6V, Zzt=30Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
DF	-	MM1Z4713	Zener diode	28.50..31.50V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
DF	-	MMSZ4698	Zener diode	11V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
DF	-	MMSZ4698-F	Zener diode	10.5..11.6V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
DF	-	MMSZ4713	Zener diode	30V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
DF	-	P4SMA130	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 400W(1ms)	DO-214AC	1d	2j	Fag
DF	-	P6SMBJ58C	TVS	Vrwm=58V, Vbr=64.4..81.6V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DF	-	SM6T7V5	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, 53A, 600W(1ms)	DO-214AA	1d	1q	Ste
DF	-	SMBG58C	TVS	Vrwm=58V, Vbr=64.4..81.6V, 5.8A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DF	-	SMBJ58C	TVS	Vrwm=58V, Vbr=64.4..81.6V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DF	-	TCUDZS13VB	Zener diode	12.91..13.49V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1a	Tac
DF	-	TV06B580KB-G	TVS	Vrwm=58.0V, Vbr=64.40..78.70V, Ipp=5.83A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DF	-	UDZS13B	Zener diode	12.91..13.49V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1a	Tsc
DF	-	UDZS13VBW	Zener diode	12.91..13.49V, Izt=5mA, Zzt=40Ω, 200mW	SOD-123FL	7d	1a	Tac
DF	-	ZMV834	C-diode	VHF/UHF-tuning, 25V, 330mW, 47pF(2V), ΔC=±20%	SOD-323	5d	1a	Zx
DFD	-	SMLJ26C	TVS	Vrwm=26V, Vbr=28.9..35.3V, Ipp=64.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFE	-	3.0SMCJ26CA	TVS	Vbr=28.9..33.2V, Vrwm=26V, 71.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DFE	-	SMDJ26CA	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=71.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFE	-	SMDJ26CA	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=71.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DFE	-	SMLJ26CA	TVS	Vrwm=26V, Vbr=28.9..31.9V, Ipp=71.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
DFEH	-	SMDJ26CA-HRA	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=71.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFF	-	SMLJ28C	TVS	Vrwm=28V, Vbr=31.1..38.0V, Ipp=60.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFG	-	3.0SMCJ28CA	TVS	Vbr=31.1..35.8V, Vrwm=28V, 66.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DFG	-	SMDJ28CA	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=66.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFG	-	SMDJ28CA	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=66.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DFG	-	SMLJ28CA	TVS	Vrwm=28V, Vbr=31.1..34.4V, Ipp=66.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFGH	-	SMDJ28CA-HRA	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=66.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFH	-	SMLJ30C	TVS	Vrwm=30V, Vbr=33.3..40.7V, Ipp=56.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFJ	-	1.5SMC7.5	TVS	Vrwm=6.05V, Vbr=6.75..8.25V, Ipp=128A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DFK	-	3.0SMCJ30CA	TVS	Vbr=33.3..38.3V, Vrwm=30V, 62.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DFK	-	SMDJ30CA	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=62.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DFK	-	SMDJ30CA	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=62.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFK	-	SMLJ30CA	TVS	Vrwm=30V, Vbr=33.3..36.8V, Ipp=62.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFKH	-	SMDJ30CA-HRA	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=62.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFL	-	SMLJ33C	TVS	Vrwm=33V, Vbr=36.7..44.9V, Ipp=50.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFM	-	3.0SMCJ33CA	TVS	Vbr=36.7..42.2V, Vrwm=33V, 56.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DFM	-	SMDJ33CA	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=56.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DFM	-	SMDJ33CA	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=56.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFM	-	SMLJ33CA	TVS	Vrwm=33V, Vbr=36.7..40.6V, Ipp=56.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFMH	-	SMDJ33CA-HRA	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=56.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFN	-	SMLJ36C	TVS	Vrwm=36V, Vbr=40.0..48.9V, Ipp=46.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFP	-	3.0SMCJ36CA	TVS	Vbr=40.0..46.0V, Vrwm=36V, 51.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DFP	-	SMDJ36CA	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=51.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DFP	-	SMDJ36CA	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=51.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFP	-	SMLJ36CA	TVS	Vrwm=36V, Vbr=40.0..44.2V, Ipp=51.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFP	-	TPSMC7.5	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 128A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DFPH	-	SMDJ36CA-HRA	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=51.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFQ	-	SMLJ40C	TVS	Vrwm=40V, Vbr=44.4..54.3V, Ipp=42.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFR	-	3.0SMCJ40CA	TVS	Vbr=44.4..51.1V, Vrwm=40V, 46.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DFR	-	SMDJ40CA	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=46.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFR	-	SMDJ40CA	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=46.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DFR	-	SMLJ40CA	TVS	Vrwm=40V, Vbr=44.4..49.1V, Ipp=46.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFRH	-	SMDJ40CA-HRA	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=46.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFS	-	SMLJ43C	TVS	Vrwm=43V, Vbr=47.8..58.4V, Ipp=39.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFT	-	3.0SMCJ43CA	TVS	Vbr=47.8..54.9V, Vrwm=43V, 43.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DFT	-	SMDJ43CA	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=43.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DFT	-	SMDJ43CA	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=43.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFT	-	SMLJ43CA	TVS	Vrwm=43V, Vbr=47.8..52.8V, Ipp=43.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFTH	-	SMDJ43CA-HRA	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=43.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFU	-	SMLJ45C	TVS	Vrwm=45V, Vbr=50.0..61.1V, Ipp=37.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFV	-	3.0SMCJ45CA	TVS	Vbr=50.0..57.5V, Vrwm=45V, 41.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DFV	-	SMDJ45CA	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=41.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFV	-	SMDJ45CA	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=41.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DFV	-	SMLJ45CA	TVS	Vrwm=45V, Vbr=50.0..55.3V, Ipp=41.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFVH	-	SMDJ45CA-HRA	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=41.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFW	-	SMLJ48C	TVS	Vrwm=48V, Vbr=53.3..65.1V, Ipp=35.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFX	-	3.0SMCJ48CA	TVS	Vbr=53.3..61.3V, Vrwm=48V, 38.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DFX	-	SMDJ48CA	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=38.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DFX	-	SMDJ48CA	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=38.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFX	-	SMLJ48CA	TVS	Vrwm=48V, Vbr=53.3..58.9V, Ipp=38.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFXH	-	SMDJ48CA-HRA	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=38.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFY	-	SMLJ51C	TVS	Vrwm=51V, Vbr=56.7..69.3V, Ipp=37.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFZ	-	3.0SMCJ51CA	TVS	Vbr=56.7..65.2V, Vrwm=51V, 36.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DFZ	-	SMDJ51CA	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=36.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DFZ	-	SMDJ51CA	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=36.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DFZ	-	SMLJ51CA	TVS	Vrwm=51V, Vbr=56.7..62.7V, Ipp=36.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DFZH	-	SMDJ51CA-HRA	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=36.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DG	-	BZT52H-B3V6	Zener diode	3.6V±2%, Izt=5mA, Zzt=95Ω, 375mW	SOD-123FL	7d	1a	Phi
DG	-	BZX384-C20	Zener diode	20V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Nxp
DG	-	CD214B-T58CA	TVS	Vrwm=58V, Irsm=6.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
DG	-	P4SMA130A	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 400W(1ms)	DO-214AC	1d	2j	Fag
DG	-	P6SMBJ58CA	TVS	Vrwm=58V, Vbr=64.4..81.6V, 6.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DG	-	SM6T7V5A	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, 53A, 600W(1ms)	DO-214AA	1d	1q	Mde
DG	-	SMBG58CA	TVS	Vrwm=58V, Vbr=64.4..74.1V, 6.4A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DG	-	SMBJ58CA	TVS	Vrwm=58V, Vbr=64.4..74.1V, 6.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
DG	-	SMBJ58CA	TVS	Vrwm=58V, Vbr=64.4..74.1V, 6.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DG	-	TCUDZS15VB	Zener diode	14.34..14.98V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1a	Tac
DG	-	TV04A351J-G	TVS	Vrwm=350.0V, Vbr=391.0..432.0V, Ipp=0.71A, 400W(1ms)	DO-214AC	1d	2o	Cmc
DG	-	TV06B580JB-G	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=6.41A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DG	-	UDZS15B	Zener diode	14.34..14.98V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1a	Tsc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
DG	-	UDZS15VBW	Zener diode	14.34..14.98V, Izt=5mA, Zzt=40Ω, 200mW	SOD-123FL	7d	1a	Tac
DG	-	ZMV835	C-diode	VHF/UHF-tuning, 25V, 330mW, 68pF(2V), ΔC=±20%	SOD-323	5d	1a	Zx
DGD	-	SMLJ54C	TVS	Vrwm=54V, Vbr=60.0..73.3V, Ipp=31.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGE	-	3.0SMCJ54CA	TVS	Vbr=60.0..69.0V, Vrwm=54V, 34.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DGE	-	SMDJ54CA	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=34.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGE	-	SMDJ54CA	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=34.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DGE	-	SMLJ54CA	TVS	Vrwm=54V, Vbr=60.0..66.3V, Ipp=34.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGEH	-	SMDJ54CA-HRA	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=34.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGF	-	SMLJ58C	TVS	Vrwm=58V, Vbr=64.4..78.7V, Ipp=39.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGG	-	3.0SMCJ58CA	TVS	Vbr=64.4..74.1V, Vrwm=58V, 32.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DGG	-	SMDJ58CA	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=32.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DGG	-	SMDJ58CA	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=32.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGG	-	SMLJ58CA	TVS	Vrwm=58V, Vbr=64.4..71.2V, Ipp=32.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGGH	-	SMDJ58CA-HRA	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=32.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGH	-	SMLJ60C	TVS	Vrwm=60V, Vbr=66.7..81.5V, Ipp=28.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGJ	-	1.5SMC7.5A	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=132A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DGK	-	3.0SMCJ60CA	TVS	Vbr=66.7..76.7V, Vrwm=60V, 31.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DGK	-	SMDJ60CA	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=31.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DGK	-	SMDJ60CA	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=31.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGK	-	SMLJ60CA	TVS	Vrwm=60V, Vbr=66.7..73.7V, Ipp=31.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGKH	-	SMDJ60CA-HRA	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=31.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGL	-	SMLJ64C	TVS	Vrwm=64V, Vbr=71.1..86.9V, Ipp=26.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGM	-	3.0SMCJ64CA	TVS	Vbr=71.1..81.8V, Vrwm=64V, 29.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DGM	-	SMDJ64CA	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=29.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DGM	-	SMDJ64CA	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=29.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGM	-	SMLJ64CA	TVS	Vrwm=64V, Vbr=71.1..78.6V, Ipp=29.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGMH	-	SMDJ64CA-HRA	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=29.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGN	-	SMLJ70C	TVS	Vrwm=70V, Vbr=77.8..95.1V, Ipp=24.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGP	-	3.0SMCJ70CA	TVS	Vbr=77.8..89.5V, Vrwm=70V, 26.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DGP	-	SMDJ70CA	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=26.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DGP	-	SMDJ70CA	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=26.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGP	-	SMLJ70CA	TVS	Vrwm=70V, Vbr=77.8..86.0V, Ipp=6.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGP	-	TPSMC7.5A	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 132A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DGPH	-	SMDJ70CA-HRA	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=26.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGQ	-	SMLJ75C	TVS	Vrwm=75V, Vbr=83.3..102V, Ipp=22.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGR	-	3.0SMCJ75CA	TVS	Vbr=83.3..95.8V, Vrwm=75V, 24.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DGR	-	SMDJ75CA	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=24.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGR	-	SMDJ75CA	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=24.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DGR	-	SMLJ75CA	TVS	Vrwm=75V, Vbr=83.3..92.1V, Ipp=24.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGRH	-	SMDJ75CA-HRA	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=24.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGS	-	SMLJ78C	TVS	Vrwm=78V, Vbr=86.7..106V, Ipp=21.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGT	-	3.0SMCJ78CA	TVS	Vbr=86.7..99.7V, Vrwm=78V, 22.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DGT	-	SMDJ78CA	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=23.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGT	-	SMDJ78CA	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=23.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DGT	-	SMLJ78CA	TVS	Vrwm=78V, Vbr=86.7..95.8V, Ipp=22.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGTH	-	SMDJ78CA-HRA	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=23.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGU	-	SMLJ85C	TVS	Vrwm=85V, Vbr=94.4..115V, Ipp=19.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGV	-	3.0SMCJ85CA	TVS	Vbr=94.4..108.2V, Vrwm=85V, 20.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DGV	-	SMDJ85CA	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=21.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGV	-	SMDJ85CA	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=21.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DGV	-	SMLJ85CA	TVS	Vrwm=85V, Vbr=94.4..104V, Ipp=20.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGVH	-	SMDJ85CA-HRA	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=21.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGW	-	SMLJ90C	TVS	Vrwm=90V, Vbr=100..122V, Ipp=18.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGX	-	3.0SMCJ90CA	TVS	Vbr=100..115.5V, Vrwm=90V, 20.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DGX	-	SMDJ90CA	TVS	Vrwm=90V, Vbr=100.0..111.0V, Ipp=20.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGX	-	SMDJ90CA	TVS	Vrwm=90V, Vbr=100.0..111.0V, Ipp=20.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DGX	-	SMLJ90CA	TVS	Vrwm=90V, Vbr=100..111V, Ipp=20.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGXH	-	SMDJ90CA-HRA	TVS	Vrwm=90.0V, Vbr=100.0..111.0V, Ipp=20.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGY	-	SMLJ100C	TVS	Vrwm=100V, Vbr=111..136V, Ipp=16.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGZ	-	3.0SMCJ100CA	TVS	Vbr=111..128.0V, Vrwm=100V, 18.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DGZ	-	SMDJ100CA	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=18.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DGZ	-	SMDJ100CA	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=18.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DGZ	-	SMLJ100CA	TVS	Vrwm=100V, Vbr=111..123V, Ipp=18.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DGZH	-	SMDJ100CA-HRA	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=18.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DH	-	BZT52H-B3V9	Zener diode	3.9V±2%, Izt=5mA, Zzt=95Ω, 375mW	SOD-123FL	7d	1a	Phi
DH	-	BZX384-C22	Zener diode	22V±5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Nxp
DH	-	LMSZ4699T1G	Zener diode	11.4..12.6V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
DH	-	MM1Z4714	Zener diode	31.35..34.65V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
DH	-	MMSZ4699	Zener diode	12V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
DH	-	MMSZ4699-F	Zener diode	11.4..12.6V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
DH	-	MMSZ4714	Zener diode	33V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
DH	-	P4SMA150	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
DH	-	P6SMBJ60C	TVS	Vrwm=60V, Vbr=66.7..84.5V, 5.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DH	-	SMBG60C	TVS	Vrwm=60V, Vbr=66.7..84.5V, 5.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DH	-	SMBJ60C	TVS	Vrwm=60V, Vbr=66.7..84.5V, 5.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DH	-	TCUDZS16VB	Zener diode	15.85..16.51V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1a	Tac
DH	-	TV06B600KB-G	TVS	Vrwm=60.0V, Vbr=66.70..81.50V, Ipp=5.61A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DH	-	UDZS16B	Zener diode	15.85..16.51V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1a	Tsc
DH	-	UDZS16VBW	Zener diode	15.85..16.51V, Izt=5mA, Zzt=40Ω, 200mW	SOD-123FL	7d	1a	Tac
DHD	-	SMLJ110C	TVS	Vrwm=110V, Vbr=122..149V, Ipp=15.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DHE	-	3.0SMCJ110CA	TVS	Vbr=122..140.5V, Vrwm=110V, 16.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DHE	-	SMDJ110CA	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=16.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DHE	-	SMDJ110CA	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=16.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DHE	-	SMLJ110CA	TVS	Vrwm=110V, Vbr=122..135V, Ipp=16.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DHEH	-	SMDJ110CA-HRA	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=16.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DHF	-	SMLJ120C	TVS	Vrwm=120V, Vbr=133..163V, Ipp=14.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DHG	-	3.0SMCJ120CA	TVS	Vbr=133..153.0V, Vrwm=120V, 15.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DHG	-	SMDJ120CA	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=15.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DHG	-	SMDJ120CA	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=15.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DHG	-	SMLJ120CA	TVS	Vrwm=120V, Vbr=133..147V, Ipp=15.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DHGH	-	SMDJ120CA-HRA	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=15.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DHH	-	SMLJ130C	TVS	Vrwm=130V, Vbr=144..176V, Ipp=13.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DHJ	-	1.5SMC8.2	TVS	Vrwm=6.63V, Vbr=7.38..9.02V, Ipp=120A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DHK	-	3.0SMCJ130CA	TVS	Vbr=144..165.5V, Vrwm=130V, 14.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DHK	-	SMDJ130CA	TVS	Vrwm=130V, Vbr=144.0..159.0V, Ipp=14.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DHK	-	SMDJ130CA	TVS	Vrwm=130V, Vbr=144.0..159.0V, Ipp=14.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DHK	-	SMLJ130CA	TVS	Vrwm=130V, Vbr=144..159V, Ipp=14.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DHKH	-	SMDJ130CA-HRA	TVS	Vrwm=130.0V, Vbr=144.0..159.0V, Ipp=14.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DHL	-	SMLJ150C	TVS	Vrwm=150V, Vbr=167..204V, Ipp=11.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DHM	-	3.0SMCJ150CA	TVS	Vbr=167..192.5V, Vrwm=150V, 12.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DHM	-	SMDJ150CA	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=12.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DHM	-	SMDJ150CA	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=12.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DHM	-	SMLJ150CA	TVS	Vrwm=150V, Vbr=167..185V, Ipp=12.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DHMH	-	SMDJ150CA-HRA	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=12.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DHN	-	SMLJ160C	TVS	Vrwm=160V, Vbr=178..218V, Ipp=10.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DHP	-	3.0SMCJ160CA	TVS	Vbr=178..205.0V, Vrwm=160V, 11.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DHP	-	SMDJ160CA	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=11.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DHP	-	SMDJ160CA	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=11.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DHP	-	SMLJ160CA	TVS	Vrwm=160V, Vbr=178..197V, Ipp=11.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DHP	-	TPSMC8.2	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 120A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DHPH	-	SMDJ160CA-HRA	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=11.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DHQ	-	SMLJ170C	TVS	Vrwm=170V, Vbr=189..231V, Ipp=9.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DHR	-	3.0SMCJ170CA	TVS	Vbr=189..217.5V, Vrwm=170V, 11.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mde
DHR	-	SMDJ170CA	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=10.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1e	Mde
DHR	-	SMDJ170CA	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=10.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DHR	-	SMLJ170CA	TVS	Vrwm=170V, Vbr=189..209V, Ipp=11.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
DHRH	-	SMDJ170CA-HRA	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=10.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	2s	Lif
DJ	-	BZT52H-B4V3	Zener diode	4.3V±2%, Izt=5mA, Zzt=95Ω, 375mW	SOD-123FL	7d	1a	Phi
DJ	-	BZX384-C24	Zener diode	24V±5%, Izt=2mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Nxp
DJ	-	LMSZ4700T1G	Zener diode	12.35..13.65V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
DJ	-	MM1Z4715	Zener diode	34.20..37.80V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
DJ	-	MMSZ4700	Zener diode	13V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
DJ	-	MMSZ4700-F	Zener diode	12.4..13.7V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
DJ	-	MMSZ4715	Zener diode	36V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
DJ	-	P4SMA400A	TVS	Vbr=380..420V, Vrwm=342V, 0.73A, 400W(1ms)	DO-214AC	1d	2j	Fag
DJ	-	TCUDZS18VB	Zener diode	17.56..18.35V, Izt=5mA, Zzt=50Ω, 200mW	SOD-323FL	7d	1a	Tac
DJ	-	UDZS18B	Zener diode	17.56..18.35V, Izt=5mA, Zzt=50Ω, 200mW	SOD-323FL	7d	1a	Tsc
DJ	-	UDZS18VBW	Zener diode	17.56..18.35V, Izt=5mA, Zzt=50Ω, 200mW	SOD-123FL	7d	1a	Tac
DK	-	BZT52H-B4V7	Zener diode	4.7V±2%, Izt=5mA, Zzt=78Ω, 375mW	SOD-123FL	7d	1a	Phi
DK	-	BZX384-C27	Zener diode	27V±5%, Izt=2mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Nxp
DK	-	CD214B-T60CA	TVS	Vrwm=60V, Irsm=6.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
DK	-	LMSZ4701T1G	Zener diode	13.3..14.7V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
DK	-	MM1Z4716	Zener diode	37.05..40.95V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
DK	-	MMSZ4701	Zener diode	14V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
DK	-	MMSZ4701-F	Zener diode	13.3..14.7V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
DK	-	MMSZ4716	Zener diode	39V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
DK	-	P4SMA440A	TVS	Vbr=418..462V, Vrwm=376V, 1.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
DK	-	P6SMBJ60CA	TVS	Vrwm=60V, Vbr=66.7..84.5V, 6.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DK	-	SMBG60CA	TVS	Vrwm=60V, Vbr=66.7..76.7V, 6.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DK	-	SMBJ60CA	TVS	Vrwm=60V, Vbr=66.7..76.7V, 6.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
DK	-	SMBJ60CA	TVS	Vrwm=60V, Vbr=66.7..76.7V, 6.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
DK	-	TCUDZS20VB	Zener diode	19.52..20.39V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323FL	7d	1a	Tac
DK	-	TV04A401J-G	TVS	Vrwm=400.0V, Vbr=447.0..494.0V, Ipp=0.62A, 400W(1ms)	DO-214AC	1d	2o	Cmc
DK	-	TV06B600JB-G	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=6.20A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DK	-	UDZS20B	Zener diode	19.52..20.39V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323FL	7d	1a	Tsc
DK	-	UDZS20VBW	Zener diode	19.52..20.39V, Izt=5mA, Zzt=60Ω, 200mW	SOD-123FL	7d	1a	Tac
DKJ	-	1.5SMC8.2A	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=124A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DKP	-	TPSMC8.2A	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 124A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DL	-	BZT52H-B5V1	Zener diode	5.1V±2%, Izt=5mA, Zzt=60Ω, 375mW	SOD-123FL	7d	1a	Phi
DL	-	BZX384-C30	Zener diode	30V±5%, Izt=2mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Nxp
DL	-	P4SMA150A	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 400W(1ms)	DO-214AC	1d	2j	Fag
DL	-	P6SMBJ64C	TVS	Vrwm=64V, Vbr=71.1..90.1V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DL	-	SMBG64C	TVS	Vrwm=64V, Vbr=71.1..90.1V, 5.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DL	-	SMBJ64C	TVS	Vrwm=64V, Vbr=71.1..90.1V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DL	-	TCUDZS22VB	Zener diode	21.54..22.47V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Tac
DL	-	TV06B640KB-G	TVS	Vrwm=64.0V, Vbr=71.10..86.90V, Ipp=5.26A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DL	-	UDZS22B	Zener diode	21.54..22.47V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Tsc
DL	-	UDZS22VBW	Zener diode	21.54..22.47V, Izt=5mA, Zzt=80Ω, 200mW	SOD-123FL	7d	1a	Tac
DLJ	-	1.5SMC9.1	TVS	Vrwm=7.37V, Vbr=8.19..10V, Ipp=109A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DLP	-	TPSMC9.1	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 109A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DM	-	BZT52H-B5V6	Zener diode	5.6V±2%, Izt=5mA, Zzt=40Ω, 375mW	SOD-123FL	7d	1a	Phi
DM	-	BZX384-C33	Zener diode	33V±5%, Izt=2mA, Zzt=35Ω, 200mW	SOD-323	5d	1a	Nxp
DM	-	CD214B-T64CA	TVS	Vrwm=64V, Irsm=5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
DM	-	LMSZ4702T1G	Zener diode	14.25..15.75V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
DM	-	MM1Z4717	Zener diode	40.85..45.15V, Izt=10mA, 500mW	SOD-323FL	7d	1a	Eic
DM	-	MMSZ4702	Zener diode	15V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
DM	-	MMSZ4702-F	Zener diode	14.3..15.8V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
DM	-	MMSZ4717	Zener diode	43V±5%, Izt=50µA, 500mW	SOD-123	5d	1a	Eic
DM	-	P4SMA160	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 400W(1ms)	DO-214AC	1d	2j	Fag
DM	-	P6SMBJ64CA	TVS	Vrwm=64V, Vbr=71.1..90.1V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DM	-	SMBG64CA	TVS	Vrwm=64V, Vbr=71.1..81.8V, 5.8A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DM	-	SMBJ64CA	TVS	Vrwm=64V, Vbr=71.1..81.8V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
DM	-	SMBJ64CA	TVS	Vrwm=64V, Vbr=71.1..81.8V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DM	-	TCUDZS24VB	Zener diode	23.72..24.78V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Tac
DM	-	TV04A441J-G	TVS	Vrwm=440.0V, Vbr=492.0..543.0V, Ipp=0.56A, 400W(1ms)	DO-214AC	1d	2o	Cmc
DM	-	TV06B640JB-G	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=5.83A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DM	-	UDZS24B	Zener diode	23.72..24.78V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Tsc
DM	-	UDZS24VBW	Zener diode	23.72..24.78V, Izt=5mA, Zzt=80Ω, 200mW	SOD-123FL	7d	1a	Tac
DMJ	-	1.5SMC9.1A	TVS	Vrwm=7.78V, Vbr=8.65..9.5V, Ipp=112A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DMP	-	TPSMC9.1A	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 112A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DN	-	BZT52B2V4WS	Zener diode	2.352..2.448V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
DN	-	BZT52H-B6V2	Zener diode	6.2V±2%, Izt=5mA, Zzt=10Ω, 375mW	SOD-123FL	7d	1a	Phi
DN	-	BZX384-C36	Zener diode	36V±5%, Izt=2mA, Zzt=35Ω, 200mW	SOD-323	5d	1a	Nxp
DN	-	LMSZ4703T1G	Zener diode	15.2..16.8V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
DN	-	MM3Z2B4H	Zener diode	2.352..2.448V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323	5d	1a	Zow
DN	-	MMSZ4703	Zener diode	16V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
DN	-	MMSZ4703-F	Zener diode	15.2..16.8V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
DN	-	P4SMA160A	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 400W(1ms)	DO-214AC	1d	2j	Fag
DN	-	P6SMBJ70C	TVS	Vrwm=70V, Vbr=77.8..98.6V, 4.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DN	-	SM6T10	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, 41A, 600W(1ms)	DO-214AA	1d	1q	Ste
DN	-	SMBG70C	TVS	Vrwm=70V, Vbr=77.8..98.6V, 4.8A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DN	-	SMBJ70C	TVS	Vrwm=70V, Vbr=77.8..98.6V, 4.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DN	-	TCUDZS27VB	Zener diode	26.19..27.53V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323FL	7d	1a	Tac
DN	-	TV06B700KB-G	TVS	Vrwm=70.0V, Vbr=77.80..95.10V, Ipp=4.80A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DN	-	UDZS27B	Zener diode	26.19..27.53V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323FL	7d	1a	Tsc
DN	-	UDZS27VBW	Zener diode	26.19..27.53V, Izt=5mA, Zzt=100Ω, 200mW	SOD-123FL	7d	1a	Tac
DNJ	-	1.5SMC10	TVS	Vrwm=8.1V, Vbr=9..11V, Ipp=100A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DNP	-	TPSMC10	TVS	Vbr=9.00..11.0V, Vrwm=8.10V, 100A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DP	-	BZT52B2V7WS	Zener diode	2.646..2.754V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
DP	-	BZT52H-B6V8	Zener diode	6.8V±2%, Izt=5mA, Zzt=8Ω, 375mW	SOD-123FL	7d	1a	Phi
DP	-	BZX384-C39	Zener diode	39V±5%, Izt=2mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Nxp
DP	-	CD214B-T70CA	TVS	Vrwm=70V, Irsm=5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
DP	-	CMDZ2L8	Zener diode	2.660..2.940V, Izt=0.5mA, Zzt=900Ω, 250mW	SOD-323	5d	1a	Cen
DP	-	KDZ8.2FVY	Zener diode	8.02..8.36V, Izt=5mA, Zzt=20Ω, 100mW	TFSC	7d	1a	Kec
DP	-	LMSZ4704T1G	Zener diode	16.15..17.85V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
DP	-	MM3Z2B7H	Zener diode	2.646..2.754V, Izt=5mA, Zzt=110Ω, 300mW	SOD-323	5d	1a	Zow
DP	-	MMSZ4704	Zener diode	17V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
DP	-	MMSZ4704-F	Zener diode	16.2..17.9V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
DP	-	P4SMA170	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 400W(1ms)	DO-214AC	1d	2j	Fag
DP	-	P6SMBJ70CA	TVS	Vrwm=70V, Vbr=77.8..98.6V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
DP	-	SM6T10A	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, 41A, 600W(1ms)	DO-214AA	1d	1a	Mde
DP	-	SMBG70CA	TVS	Vrwm=70V, Vbr=77.8..89.5V, 5.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DP	-	SMBJ70CA	TVS	Vrwm=70V, Vbr=77.8..89.5V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
DP	-	SMBJ70CA	TVS	Vrwm=70V, Vbr=77.8..89.5V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DP	-	TCUDZS30VB	Zener diode	29.19..30.69V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323FL	7d	1a	Tac
DP	-	TV06B700JB-G	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=5.31A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DP	-	UDZS30B	Zener diode	29.19..30.69V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323FL	7d	1a	Tsc
DP	-	UDZS30VBW	Zener diode	29.19..30.69V, Izt=5mA, Zzt=100Ω, 200mW	SOD-123FL	7d	1a	Tac
DPJ	-	1.5SMC10A	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, Ipp=103A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DPP	-	TPSMC10A	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 103A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DQ	-	BZT52H-B7V5	Zener diode	7.5V±2%, Izt=5mA, Zzt=10Ω, 375mW	SOD-123FL	7d	1a	Phi
DQ	-	P4SMA170A	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 400W(1ms)	DO-214AC	1d	2j	Fag
DQ	-	P6SMBJ75C	TVS	Vrwm=75V, Vbr=67.5..82.5V, 4.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DQ	-	SMBG75C	TVS	Vrwm=75V, Vbr=83.3..105.7V, 4.5A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DQ	-	SMBJ75C	TVS	Vrwm=75V, Vbr=83.3..105.7V, 4.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DQ	-	TV06B750KB-G	TVS	Vrwm=75.0V, Vbr=83.30..102.0V, Ipp=4.48A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DQJ	-	1.5SMC11	TVS	Vrwm=8.92V, Vbr=9.9..12.1V, Ipp=93A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DQP	-	TPSMC11	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 92.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DR	-	BZT52B3V0WS	Zener diode	2.940..3.060V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
DR	-	BZT52H-B8V2	Zener diode	8.2V±2%, Izt=5mA, Zzt=10Ω, 375mW	SOD-123FL	7d	1a	Phi
DR	-	BZX384-C43	Zener diode	43V±5%, Izt=2mA, Zzt=45Ω, 200mW	SOD-323	5d	1a	Nxp
DR	-	CD214B-T75CA	TVS	Vrwm=75V, Irsm=4.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
DR	-	MM3Z3B0H	Zener diode	2.94..3.06V, Izt=5mA, Zzt=120Ω, 300mW	SOD-323	5d	1a	Zow
DR	-	P4SMA180	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 400W(1ms)	DO-214AC	1d	2j	Fag
DR	-	P6SMBJ75CA	TVS	Vrwm=75V, Vbr=67.5..82.5V, 4.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DR	-	SMBG75CA	TVS	Vrwm=75V, Vbr=83.3..95.8V, 4.9A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DR	-	SMBJ75CA	TVS	Vrwm=75V, Vbr=83.3..95.8V, 4.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DR	-	SMBJ75CA	TVS	Vrwm=75V, Vbr=83.3..95.8V, 4.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
DR	-	TCUDZS33VB	Zener diode	32.15..33.79V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323FL	7d	1a	Tac
DR	-	TV06B750JB-G	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=4.96A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DR	-	UDZS33B	Zener diode	32.15..33.79V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323FL	7d	1a	Tsc
DR	-	UDZS33VBW	Zener diode	32.15..33.79V, Izt=5mA, Zzt=100Ω, 200mW	SOD-123FL	7d	1a	Tac
DRJ	-	1.5SMC11A	TVS	Vrwm=9.4V, Vbr=10.5..11.6V, Ipp=96A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DRP	-	TPSMC11A	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 96.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DS	-	BZT52H-B9V1	Zener diode	9.1V±2%, Izt=5mA, Zzt=10Ω, 375mW	SOD-123FL	7d	1a	Phi
DS	-	BZX384-C47	Zener diode	47V±5%, Izt=2mA, Zzt=50Ω, 200mW	SOD-323	5d	1a	Nxp
DS	-	P4SMA180A	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 400W(1ms)	DO-214AC	1d	2j	Fag
DS	-	P6SMBJ78C	TVS	Vrwm=78V, Vbr=86.7..109.8V, 4.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DS	-	SMBG78C	TVS	Vrwm=58V, Vbr=86.7..109.8V, 4.3A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DS	-	SMBJ78C	TVS	Vrwm=58V, Vbr=86.7..109.8V, 4.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DS	-	TCUDZS36VB	Zener diode	35.07..36.87V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323FL	7d	1a	Tac
DS	-	TV06B780KB-G	TVS	Vrwm=78.0V, Vbr=86.70..106.0V, Ipp=4.32A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DS	-	UDZS36B	Zener diode	35.07..36.87V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323FL	7d	1a	Tsc
DS	-	UDZS36VBW	Zener diode	35.07..36.87V, Izt=5mA, Zzt=100Ω, 200mW	SOD-123FL	7d	1a	Tac
DSJ	-	1.5SMC12	TVS	Vrwm=9.72V, Vbr=10.8..13.2V, Ipp=87A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DSP	-	TPSMC12	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 86.7A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DT	-	BZT52H-B10	Zener diode	10V±2%, Izt=5mA, Zzt=10Ω, 375mW	SOD-123FL	7d	1a	Phi
DT	-	BZX384-C51	Zener diode	51V±5%, Izt=2mA, Zzt=60Ω, 200mW	SOD-323	5d	1a	Nxp
DT	-	CD214B-T78CA	TVS	Vrwm=78V, Irsm=4.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
DT	-	LMSZ4705T1G	Zener diode	17.1..18.9V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
DT	-	MMSZ4705	Zener diode	18V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
DT	-	MMSZ4705-F	Zener diode	17.1..18.9V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
DT	-	P4SMA200	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 400W(1ms)	DO-214AC	1d	2j	Fag
DT	-	P6SMBJ78CA	TVS	Vrwm=78V, Vbr=86.7..109.8V, 4.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DT	-	SM6T12A	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, 36A, 600W(1ms)	DO-214AA	1d	1a	Mde
DT	-	SMBG78CA	TVS	Vrwm=78V, Vbr=86.7..99.7V, 4.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DT	-	SMBJ78CA	TVS	Vrwm=78V, Vbr=86.7..99.7V, 4.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DT	-	SMBJ78CA	TVS	Vrwm=78V, Vbr=86.7..99.7V, 4.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
DT	-	TV06B780JB-G	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=4.76A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DTJ	-	1.5SMC12A	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, Ipp=90A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DTP	-	TPSMC12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 89.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DU	-	BZT52H-B11	Zener diode	11V±2%, Izt=5mA, Zzt=10Ω, 375mW	SOD-123FL	7d	1a	Phi
DU	-	BZX384-C56	Zener diode	56V±5%, Izt=2mA, Zzt=70Ω, 200mW	SOD-323	5d	1a	Nxp
DU	-	LMSZ4706T1G	Zener diode	18.05..19.95V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
DU	-	MMSZ4706	Zener diode	19V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
DU	-	MMSZ4706-F	Zener diode	18.1..20.0V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
DU	-	P4SMA200A	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 400W(1ms)	DO-214AC	1d	2j	Fag
DU	-	P6SMBJ85C	TVS	Vrwm=85V, Vbr=94.4..119.2V, 3.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DU	-	SMBG85C	TVS	Vrwm=85V, Vbr=94.4..119.2V, 3.9A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DU	-	SMBJ85C	TVS	Vrwm=85V, Vbr=94.4..119.2V, 3.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
DU	-	TV06B850KB-G	TVS	Vrwm=85.0V, Vbr=94.40..115.0V, Ipp=3.97A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DUB	-	SMAJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 38.8A, 400W(1ms)	DO-214AC	1d	1q	Ste
DUC	-	SMAJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 35.7A, 400W(1ms)	DO-214AC	1d	1q	Ste
DUH	-	SMAJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 27.7A, 400W(1ms)	DO-214AC	1d	1q	Ste
DUJ	-	1.5SMC13	TVS	Vrwm=10.5V, Vbr=11.7..14.3V, Ipp=79A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DUK	-	SMAJ12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, 20.1A, 400W(1ms)	DO-214AC	1d	1q	Ste
DUP	-	TPSMC13	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 78.9A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DUQ	-	SMAJ18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, 13.7A, 400W(1ms)	DO-214AC	1d	1q	Ste
DUR	-	SMAJ20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, 12.3A, 400W(1ms)	DO-214AC	1d	1q	Ste
DUS	-	SMAJ22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, 11.2A, 400W(1ms)	DO-214AC	1d	1q	Ste
DUT	-	SMAJ24A	TVS	Vrwm=24V, Vbr=26.7..29.5V, 10.3A, 400W(1ms)	DO-214AC	1d	1q	Ste
DUU	-	SMAJ26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, 9.5A, 400W(1ms)	DO-214AC	1d	1q	Ste
DUZ	-	SMAJ40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, 6.2A, 400W(1ms)	DO-214AC	1d	1q	Ste
DV	-	BZT52H-B12	Zener diode	12V±2%, Izt=5mA, Zzt=10Ω, 375mW	SOD-123FL	7d	1a	Phi
DV	-	BZX384-C62	Zener diode	62V±5%, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Nxp
DV	-	CD214B-T85CA	TVS	Vrwm=85V, Irsm=4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
DV	-	LMSZ4707T1G	Zener diode	19..21V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
DV	-	MMSZ4707	Zener diode	20V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
DV	-	MMSZ4707-F	Zener diode	19.0..21.0V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
DV	-	P4SMA220	TVS	Vbr=209..231V, Vrwm=185V, 1.22A, 400W(1ms)	DO-214AC	1d	2j	Fag
DV	-	P6SMBJ85CA	TVS	Vrwm=85V, Vbr=94.4..119.2V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DV	-	SMBG85CA	TVS	Vrwm=85V, Vbr=94.4..108.2V, 4.4A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DV	-	SMBJ85CA	TVS	Vrwm=85V, Vbr=94.4..108.2V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DV	-	SMBJ85CA	TVS	Vrwm=85V, Vbr=94.4..108.2V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
DV	-	TV06B850JB-G	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=4.38A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DVJ	-	1.5SMC13A	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, Ipp=82A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DVP	-	TPSMC13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 82.4A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DW	-	BZT52H-B13	Zener diode	13V±2%, Izt=5mA, Zzt=10Ω, 375mW	SOD-123FL	7d	1a	Phi
DW	-	BZX384-C68	Zener diode	68V±5%, Izt=2mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Nxp
DW	-	P4SMA250A	TVS	Vbr=237..263V, Vrwm=214V, 0.91A, 400W (1ms)	DO-214AC	1d	2j	Fag
DW	-	P6SMBJ90C	TVS	Vrwm=90V, Vbr=100..115.5V, 3.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DW	-	SM6T15	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, 28A, 600W(1ms)	DO-214AA	1d	1q	Ste
DW	-	SMBG90CA	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DW	-	SMBJ90CA	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DW	-	TV06B900KB-G	TVS	Vrwm=90V, Vbr=100.0..122.0V, Ipp=3.75A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DWA	-	P6SMB200C	TVS	Vrwm=200V, Vbr=190..210V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DWB	-	P6SMB200CA	TVS	Vrwm=200V, Vbr=190..210V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DWC	-	P6SMB220C	TVS	Vrwm=220V, Vbr=209..231V, 1.83A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DWD	-	P6SMB220CA	TVS	Vrwm=220V, Vbr=209..231V, 1.83A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DWE	-	P6SMB250C	TVS	Vbr=237..263V, Vrwm=214V, 1.75A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DWF	-	P6SMB250CA	TVS	Vbr=237..263V, Vrwm=214V, 1.75A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DWJ	-	1.5SMC15	TVS	Vrwm=12.1V, Vbr=13.5..16.5V, Ipp=68A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DWP	-	TPSMC15	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, 68.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DX	-	BZT52B3V3WS	Zener diode	3.234..3.366V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
DX	-	BZT52H-B15	Zener diode	15V±2%, Izt=5mA, Zzt=15Ω, 375mW	SOD-123FL	7d	1a	Phi
DX	-	BZX384-C75	Zener diode	75V±5%, Izt=2mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Nxp
DX	-	CD214B-T90CA	TVS	Vrwm=90V, Irsm=4.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
DX	-	LMSZ4709T1G	Zener diode	22.8..25.2V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
DX	-	MM3Z3B3H	Zener diode	3.234..3.366V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Zow
DX	-	MMSZ4709	Zener diode	24V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
DX	-	P4SMA220A	TVS	Vbr=209..231V, Vrwm=185V, 1.22A, 400W(1ms)	DO-214AC	1d	2j	Fag
DX	-	P6SMBJ90CA	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DX	-	SM6T15A	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, 28A, 600W(1ms)	DO-214AA	1d	1a	Mde
DX	-	SMBG90CA	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DX	-	SMBJ90CA	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
DX	-	SMBJ90CA	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DX	-	TV06B900JB-G	TVS	Vrwm=90V, Vbr=100.0..111.0V, Ipp=4.11A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
DXA	-	P6SMB22C	TVS	Vrwm=22V, Vbr=20.9..23.1V, 19.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXB	-	P6SMB22CA	TVS	Vrwm=22V, Vbr=20.9..23.1V, 19.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXC	-	P6SMB24C	TVS	Vrwm=24V, Vbr=22.8..25.2V, 18.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXD	-	P6SMB24CA	TVS	Vrwm=24V, Vbr=22.8..25.2V, 18.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXE	-	P6SMB27C	TVS	Vrwm=27V, Vbr=25.7..28.4V, 16A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXF	-	P6SMB27CA	TVS	Vrwm=27V, Vbr=25.7..28.4V, 16A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXG	-	P6SMB30C	TVS	Vrwm=30V, Vbr=28.5..31.5V, 14.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXH	-	P6SMB30CA	TVS	Vrwm=30V, Vbr=28.5..31.5V, 14.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXJ	-	1.5SMC15A	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, Ipp=71A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DXJ	-	P6SMB33C	TVS	Vrwm=33V, Vbr=31.4..34.7V, 131A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXK	-	P6SMB33CA	TVS	Vrwm=33V, Vbr=31.4..34.7V, 131A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXL	-	P6SMB36C	TVS	Vrwm=36V, Vbr=34.2..37.8V, 12A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXM	-	P6SMB36CA	TVS	Vrwm=36V, Vbr=34.2..37.8V, 12A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
DXN	-	P6SMB39C	TVS	Vrwm=39V, Vbr=37.1..41V, 11.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXP	-	P6SMB39CA	TVS	Vrwm=39V, Vbr=37.1..41V, 11.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXP	-	TPSMC15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 70.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DXQ	-	P6SMB43C	TVS	Vrwm=43V, Vbr=40.9..45.2V, 10.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXR	-	P6SMB43CA	TVS	Vrwm=43V, Vbr=40.9..45.2V, 10.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXS	-	P6SMB47C	TVS	Vrwm=47V, Vbr=44.7..49.4V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXT	-	P6SMB47CA	TVS	Vrwm=47V, Vbr=44.7..49.4V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXU	-	P6SMB51C	TVS	Vrwm=51V, Vbr=48.5..53.6V, 8.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXV	-	P6SMB51CA	TVS	Vrwm=51V, Vbr=48.5..53.6V, 8.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXW	-	P6SMB56C	TVS	Vrwm=56V, Vbr=53.2..58.8V, 7.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXX	-	P6SMB56CA	TVS	Vrwm=56V, Vbr=53.2..58.8V, 7.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXY	-	P6SMB62C	TVS	Vrwm=62V, Vbr=58.9..65.1V, 7.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DXZ	-	P6SMB62CA	TVS	Vrwm=62V, Vbr=58.9..65.1V, 7.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DY	-	BZT52B3V6WS	Zener diode	3.528..3.672V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
DY	-	BZT52H-B16	Zener diode	16V±2%, Izt=5mA, Zzt=20Ω, 375mW	SOD-123FL	7d	1a	Phi
DY	-	KDZ2.7VVY	Zener diode	2.65..2.90V, Izt=5mA, Zzt=110,Ω, 100mW	VSC	7d	1a	Kec
DY	-	LMSZ4710T1G	Zener diode	23.75..26.25V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
DY	-	MM3Z3B6H	Zener diode	3.528..3.672V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Zow
DY	-	MMSZ4710	Zener diode	25V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
DY	-	MMSZ4710-F	Zener diode	23.8..26.3V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
DY	-	P4SMA300A	TVS	Vbr=285..315V, Vrwm=256V, 0.97A, 400W(1ms)	DO-214AC	1d	2j	Fag
DY	-	P6SMBJ100C	TVS	Vrwm=100V, Vbr=90..110V, 4.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DY	-	SMBG100C	TVS	Vrwm=100V, Vbr=111..128V, 3.4A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DY	-	SMBJ100C	TVS	Vrwm=100V, Vbr=111..128V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DY	-	TV06B101KB-G	TVS	Vrwm=100.0V, Vbr=111.0..136.0V, Ipp=3.35A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
DYA	-	P6SMB68C	TVS	Vrwm=68V, Vbr=64.6..71.4V, 6.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYB	-	P6SMB68CA	TVS	Vrwm=68V, Vbr=64.6..71.4V, 6.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYC	-	P6SMB75C	TVS	Vrwm=75V, Vbr=71.3..78.8V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYD	-	P6SMB75CA	TVS	Vrwm=75V, Vbr=71.3..78.8V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYE	-	P6SMB82C	TVS	Vrwm=82V, Vbr=77.9..86.1V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYF	-	P6SMB82CA	TVS	Vrwm=82V, Vbr=77.9..86.1V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYG	-	P6SMB91C	TVS	Vrwm=91V, Vbr=86.5..95.5V, 4.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYH	-	P6SMB91CA	TVS	Vrwm=91V, Vbr=86.5..95.5V, 4.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYJ	-	1.5SMC16	TVS	Vrwm=12.9V, Vbr=14.4..17.6V, Ipp=64A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DYK	-	P6SMB100CA	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYL	-	P6SMB100C	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYL	-	P6SMB110C	TVS	Vrwm=110V, Vbr=105..116V, 3.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYM	-	P6SMB110CA	TVS	Vrwm=110V, Vbr=105..116V, 3.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYN	-	P6SMB120C	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYP	-	P6SMB120CA	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYP	-	TPSMC16	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 63.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DYQ	-	P6SMB130C	TVS	Vrwm=130V, Vbr=124..137V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYR	-	P6SMB130CA	TVS	Vrwm=130V, Vbr=124..137V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYS	-	P6SMB150C	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYT	-	P6SMB150CA	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYU	-	P6SMB160C	TVS	Vrwm=160V, Vbr=152..168V, 2.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYV	-	P6SMB160CA	TVS	Vrwm=160V, Vbr=152..168V, 2.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYW	-	P6SMB170C	TVS	Vrwm=170V, Vbr=162..179V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYX	-	P6SMB170CA	TVS	Vrwm=170V, Vbr=162..179V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYY	-	P6SMB180C	TVS	Vrwm=180V, Vbr=171 189V, 2.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DYZ	-	P6SMB180CA	TVS	Vrwm=180V, Vbr=171 189V, 2.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZ	-	BZT52B3V9WS	Zener diode	3.822..3.978V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
DZ	-	BZT52B8V2S	Zener diode	8.04..8.36V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323FL	7d	1a	Tsc
DZ	-	BZT52H-B18	Zener diode	18V±2%, Izt=5mA, Zzt=20Ω, 375mW	SOD-123FL	7d	1a	Phi
DZ	-	CD214B-T100CA	TVS	Vrwm=100V, Irsm=3.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
DZ	-	MM3Z3B9H	Zener diode	3.822..3.978V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Zow
DZ	-	MM3Z8V2B	Zener diode	8.04..8.36V, Zzt=14Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
DZ	-	MM3Z8V2BW	Zener diode	8.04..8.36V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323FL	7d	1a	Tac
DZ	-	MMSZ4709-F	Zener diode	22.8..25.2V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
DZ	-	P6SMBJ100CA	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZ	-	SMBG100CA	TVS	Vrwm=100V, Vbr=111..128V, 3.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
DZ	-	SMBJ100CA	TVS	Vrwm=100V, Vbr=111..128V, 3.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
DZ	-	SMBJ100CA	TVS	Vrwm=100V, Vbr=111..128V, 3.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
DZ	-	TCMM3Z8V2B	Zener diode	8.2V±2%, Izt=5mA, Zzt=14Ω, 200mW	SOD-323FL	7d	1a	Tac
DZ	-	TV06B101JB-G	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=3.70A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
DZA	-	P6SMB6.8C	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 57.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZB	-	P6SMB6.8CA	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 57.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZC	-	P6SMB7.5C	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 53.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZD	-	P6SMB7.5CA	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 53.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZE	-	P6SMB8.2C	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 49.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
DZF	-	P6SMB8.2CA	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 49.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZG	-	P6SMB9.1C	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 44.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZH	-	P6SMB9.1CA	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 44.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZJ	-	1.5SMC16A	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, Ipp=67A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
DZJ	-	P6SMB10C	TVS	Vrwm=10V, Vbr=9.5..10.5V, 41.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZK	-	P6SMB10CA	TVS	Vrwm=10V, Vbr=9.5..10.5V, 41.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZL	-	P6SMB11C	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZM	-	P6SMB11CA	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZN	-	P6SMB12C	TVS	Vrwm=12V, Vbr=11.4..12.6V, 35.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZP	-	P6SMB12CA	TVS	Vrwm=12V, Vbr=11.4..12.6V, 35.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZP	-	TPSMC16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 66.7A, 1500W(1ms)	DO-214AB	1d	1k	Vs
DZQ	-	P6SMB13C	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZR	-	P6SMB13CA	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZS	-	P6SMB15C	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZT	-	P6SMB15CA	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZU	-	P6SMB16C	TVS	Vrwm=16V, Vbr=15.2..16.8V, 26.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZV	-	P6SMB16CA	TVS	Vrwm=16V, Vbr=15.2..16.8V, 26.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZW	-	P6SMB18C	TVS	Vrwm=18V, Vbr=17.1..18.9V, 23.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZX	-	P6SMB18CA	TVS	Vrwm=18V, Vbr=17.1..18.9V, 23.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZY	-	P6SMB20C	TVS	Vrwm=20V, Vbr=19..21.0V, 21.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
DZZ	-	P6SMB20CA	TVS	Vrwm=20V, Vbr=19..21.0V, 21.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
E	-	1SS380	Si-diode	Sw, 40V, 100mA, Vf<1.2V(100mA), 4ns	SOD-123	5d	1a	Rhm
E	-	CDZ6.8B	Zener diode	6.8V±2.5%, Izt=40mA, 1W	VMN	7d	1s	Rhm
E	-	CH621S-40PT	Si-diode	SBD, 40V, 100mA, Vf<0.6V(50mA)	SOD-523	8d	1a	Chm
E	-	EP05H10	Si-diode	SBR, 100V, 500mA, Vf<0.8V(500mA)	SOD-123	5d	1a	Nih
E	-	ESD9Z3.3	TVS	Vrwm=3.3V, Vbr=5.0V, 10.4A, 102W(20ms)	SOD-923FL	7d	1a	Frm
E	-	GBLC15I	TVS	Vrwm=15V, 1A, 350W(1ms), 0.6pF	SOD-323	5d	1a	Prt
E	-	MM9D2V7	Zener diode	2.57..2.84V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1b	Wtr
E	-	MM9D8V2	Zener diode	7.79..8.61V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	1n	Wtr
e	-	MMSZ5231BPT	Zener diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 225mW	SOD-523	6d	1a	Chm
E	-	NZ9F2V7T	Zener diode	2.57..2.84V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1b	Ons
E	-	NZ9F4V7ST	Zener diode	4.55..4.75V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	2m	Ons
E	-	NZ9F8V2T	Zener diode	7.79..8.61V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	1n	Ons
E	-	RB520G-30GH	Si-diode	SBD, 30V, 100mA, Vf<0.45V(10mA)	SOD-723	7d	1a	Zow
E	-	TVS100W3V3D	TVS	Vrwm=3.3V, Vbr=5.0V, 9.8A, 100W(1ms)	SOD-923	7d	1d	Did
E	au	CDZ16B	Zener diode	16V±2.5%, Izt=20mA, 1W	VMN	7d	1s	Rhm
E	au	MMSZ5254BPT	Zener diode	27V±5%, Izt=4.6mA, Zzt=41Ω, 225mW	SOD-523	6d	1a	Chm
e.	-	MMSZ5231SPT	Zener diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 225mW	SOD-523	6d	1a	Chm
E.	au	MMSZ5254SPT	Zener diode	27V±5%, Izt=4.6mA, Zzt=41Ω, 225mW	SOD-523	6d	1a	Chm
E.0	-	MMSZ5235C-V-G	Zener diode	6.8V±2%, Izt=20mA, Zzt=5Ω, 500mW	SOD-123	5d	1kb	Vs
E.6	-	MMSZ5231C-V-G	Zener diode	5.1V±2%, Izt=20mA, Zzt=17Ω, 500mW	SOD-123	5d	1kb	Vs
E.7	-	MMSZ5232C-V-G	Zener diode	5.6V±2%, Izt=20mA, Zzt=11Ω, 500mW	SOD-123	5d	1kb	Vs
E.8	-	MMSZ5233C-V-G	Zener diode	6.0V±2%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123	5d	1kb	Vs
E.9	-	MMSZ5234C-V-G	Zener diode	6.2V±2%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123	5d	1kb	Vs
E0	-	BZD27C9V1P	Zener diode	8.5..9.6V, Zzt=2Ω, Izt=50mA, 800mW	SOD-123FL	7d	1i	Vs
E0	-	BZX585-B15	Zener diode	15V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
E0	-	ESD7Z3.3	TVS	Vrwm=3.3V, Vbr=5.0V, 11.9A, 113W(20ms)	SOD-723FL	7d	1a	Frm
E0	-	MMPZ5244BPT	Zener diode	13.30..14.70V, Izt=5mA, Zzt=25Ω, 225mW	SOD-323	5d	1a	Chm
E0	-	MMSZ5235B-V-G	Zener diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 500mW	SOD-123	5d	1kb	Vs
E1	-	BZD27C10P	Zener diode	9.4..10.6V, Zzt=2Ω, Izt=50mA, 800mW	SOD-123FL	7d	1i	Vs
E1	-	BZD27C11P	Zener diode	10.4..11.6V, Zzt=4Ω, Izt=50mA, 1W	SOD-123FL	7d	2u	Tsc
E1	-	BZT52H-B20	Zener diode	20V±2%, Izt=5mA, Zzt=20Ω, 375mW	SOD-123FL	7d	1a	Phi
E1	-	BZX585-B6V2	Zener diode	6.2V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
E1	-	CZRH5231B-G	Zener diode	4.85..5.36V, Zzt=17Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
E1	-	CZRV5231B-G	Zener diode	4.85..5.36V, Zzt=17Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
E1	-	CZRW5231B-G	Zener diode	4.85..5.36V, Zzt=17Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
E1	-	FES26A	Si-diode	U-fast Recovery, 200V, 1A, <30ns	DO-214AC	1d	2j	Fag
E1	-	LMSZ5231BT1G	Zener diode	4.85..5.36V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
E1	-	MAZF062	Zener diode	5.8..6.6V, Zzt=30Ω(5mA), 120mW	S-Mini	8d	1a	Pan
E1	-	MAZN062	Zener diode	5.8..6.6V, Zzt=30Ω(5mA), 120mW	SSMini2	7d	1a	Pan
E1	-	MM3Z5227B	Zener diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 200mW	SOD-323FL	7d	1a	Bts
E1	-	MM3Z5227BH	Zener diode	3.42..3.78V, Izt=20mA, Zzt=24Ω, 300mW	SOD-323	5d	1a	Zow
E1	-	MM3Z5231B	Zener diode	4.85..5.36V, Izt=20mA, Zzt=17Ω, 200mW	SOD-323	5d	1a	Ext
E1	-	MMBZ5231BV	Zener diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOD-523	6d	1a	Pjt
E1	-	MMSZ5231B	Zener diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 500mW	SOD-123	5d	1d	Di
E1	-	MMSZ5231B-F	Zener diode	4.85..5.36V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr
E1	-	MMSZ5231BS	Zener diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOD-323	5d	1d	Di
E1	-	MMSZ5231BWS	Zener diode	4.85..5.36V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
E1	-	OYD5V1T1	Zener diode	4.8...5.4V, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1a	Ouy
E1	ag	MMSZ5231B	Zener diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 500mW	SOD-123	5d	1d	Di

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
E10A	-	EGF10A	Si-diode	U-fast Rec. Rect., 50V, 1A, Vf<1V(1A), 50ns	DO-214AC	1d	1b	Zow
E10B	-	EGF10B	Si-diode	U-fast Rec. Rect., 100V, 1A, Vf<1V(1A), 50ns	DO-214AC	1d	1b	Zow
E10D	-	EGF10D	Si-diode	U-fast Rec. Rect., 200V, 1A, Vf<1V(1A), 50ns	DO-214AC	1d	1b	Zow
E10G	-	EGF10G	Si-diode	U-fast Rec. Rect., 400V, 1A, Vf<1.25V(1A), 50ns	DO-214AC	1d	1b	Zow
E10J	-	EGF10J	Si-diode	U-fast Rec. Rect., 600V, 1A, Vf<1.7V(1A), 75ns	DO-214AC	1d	1b	Zow
E10K	-	EGF10K	Si-diode	U-fast Rec. Rect., 800V, 1A, Vf<1.7V(1A), 75ns	DO-214AC	1d	1b	Zow
E10M	-	EGF10M	Si-diode	U-fast Rec. Rect., 1000V, 1A, Vf<1.7V(1A), 75ns	DO-214AC	1d	1b	Zow
E16	-	STPS160U	Si-diode	SBR, 60V, 1A, Vf<0.55V(1A)	DO-214AA	1d	1a	Ste
E2	-	BZD27C11P	Zener diode	10.4..11.6V, Zzt=4Ω, Izt=50mA, 800mW	SOD-123FL	7d	1i	Vs
E2	-	BZD27C12P	Zener diode	11.4..12.7V, Zzt=4Ω, Izt=50mA, 1W	SOD-123FL	7d	2u	Tsc
E2	-	BZT52H-B22	Zener diode	22V±2%, Izt=5mA, Zzt=25Ω, 375mW	SOD-123FL	7d	1a	Phi
E2	-	BZX585-B6V8	Zener diode	6.8V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
E2	-	CZRH5232B-G	Zener diode	5.32..5.88V, Zzt=11Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
E2	-	CZRV5232B-G	Zener diode	5.32..5.88V, Zzt=11Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
E2	-	CZRW5232B-G	Zener diode	5.32..5.88V, Zzt=11Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
E2	-	EDZ6.2B	Zener diode	6.06..6.33V, Izt=5mA, Zzt=60Ω, 150mW	SOD-523	6d	1a	Rhm
E2	-	EDZV6.2B	Zener diode	6.06..6.33V, Izt=5.0mA, Zzt=60Ω, 150mW	SOD-523	6d	2v	Rhm
E2	-	ESD7Z5.0	TVS	Vrwm=5.0V, Vbr=6.2V, 13.3A, 117W(20ms)	SOD-723FL	7d	1a	Frm
E2	-	FDZ6.2EV	Zener diode	6.060..6.330V, Izt=5mA, Zzt=60Ω, 150mW	SOD-523	6d	1a	Fis
E2	-	FDZ6.2VT	Zener diode	6.060..6.330V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	1a	Fis
E2	-	FES26B	Si-diode	U-fast Recovery, 400V, 1A, <30ns	DO-214AC	1d	2j	Fag
E2	-	LBZT52B6V2T1G	Zener diode	6.06..6.33V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
E2	-	LEDZ6.2BT1G	Zener diode	6.06..6.33V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
E2	-	LMSZ5232BT1G	Zener diode	5.32..5.88V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
E2	-	LUDZS6.2BT1G	Zener diode	6.06..6.33V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
E2	-	MAZF068	Zener diode	6.4..7.2V, Zzt=20Ω(5mA), 120mW	S-Mini	8d	1a	Pan
E2	-	MAZN068	Zener diode	6.4..7.2V, Zzt=20Ω(5mA), 120mW	SSMini2	7d	1a	Pan
E2	-	MM3Z5232B	Zener diode	5.32..5.88V, Izt=20mA, Zzt=11Ω, 200mW	SOD-323	5d	1a	Ext
E2	-	MM3Z5246B	Zener diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 200mW	SOD-323FL	7d	1a	Bts
E2	-	MM3Z5246BH	Zener diode	15.2..16.8V, Izt=7.8mA, Zzt=17Ω, 300mW	SOD-323	5d	1a	Zow
E2	-	MMBZ5232BV	Zener diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 200mW	SOD-523	6d	1a	Pjt
E2	-	MMSZ5232B	Zener diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 500mW	SOD-123	5d	1d	Di
E2	-	MMSZ5232B-F	Zener diode	5.32..5.88V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr
E2	-	MMSZ5232BS	Zener diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 200mW	SOD-323	5d	1d	Di
E2	-	MMSZ5232BWS	Zener diode	5.32..5.88V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
E2	-	OYD5V6T1	Zener diode	5.2...6V, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1a	Ouy
E2	-	TDZ6.2B	Zener diode	6.2V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
E2	-	UDZS6.2B	Zener diode	6.06..6.33V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	1a	Wtr
E2	-	UDZS6.2B	Zener diode	6.2V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
E2	-	UDZV6.2B	Zener diode	6.06..6.33V, Izt=5.0mA, Zzt=60Ω, 200mW	SOD-323	5d	2v	Rhm
E2	-	VDZS6.2B	Zener diode	6.2V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
E2	ag	MMSZ5232B	Zener diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 500mW	SOD-123	5d	1d	Di
E20A	-	EGF20A	Si-diode	U-fast Rec. Rect., 50V, 2A, Vf<1V(2A), 50ns	DO-214AA	1d	1b	Zow
E20B	-	EGF20B	Si-diode	U-fast Rec. Rect., 100V, 2A, Vf<1V(2A), 50ns	DO-214AA	1d	1b	Zow
E20D	-	EGF20D	Si-diode	U-fast Rec. Rect., 200V, 2A, Vf<1V(2A), 50ns	DO-214AA	1d	1b	Zow
E20G	-	EGF20G	Si-diode	U-fast Rec. Rect., 400V, 2A, Vf<1.25V(2A), 50ns	DO-214AA	1d	1b	Zow
E20J	-	EGF20J	Si-diode	U-fast Rec. Rect., 600V, 2A, Vf<1.7V(2A), 75ns	DO-214AA	1d	1b	Zow
E20K	-	EGF20K	Si-diode	U-fast Rec. Rect., 800V, 2A, Vf<1.7V(2A), 75ns	DO-214AA	1d	1b	Zow
E20M	-	EGF20M	Si-diode	U-fast Rec. Rect., 1000V, 2A, Vf<1.7V(2A), 75ns	DO-214AA	1d	1b	Zow
E3	-	BZD27C12P	Zener diode	11.4..12.7V, Zzt=4Ω, Izt=50mA, 800mW	SOD-123FL	7d	1i	Vs
E3	-	BZD27C13P	Zener diode	12.4..14.1V, Zzt=5Ω, Izt=50mA, 1W	SOD-123FL	7d	2u	Tsc
E3	-	BZT52H-B24	Zener diode	24V±2%, Izt=5mA, Zzt=30Ω, 375mW	SOD-123FL	7d	1a	Phi
E3	-	BZX585-B7V5	Zener diode	7.5V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
E3	-	CZRW5233B-G	Zener diode	5.70..6.30V, Zzt=7Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
E3	-	ESD7Z12	TVS	Vrwm=12V, Vbr=13.5V, 13.3A, 128W(20ms)	SOD-723FL	7d	1a	Frm
E3	-	FES26C	Si-diode	U-fast Recovery, 600V, 1A, <30ns	DO-214AC	1d	2j	Fag
E3	-	LMSZ5233BT1G	Zener diode	5.7..6.3V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
E3	-	MM3Z5267B	Zener diode	75V±5%, Izt=1.7mA, Zzt=270Ω, 200mW	SOD-323FL	7d	1a	Bts
E3	-	MM3Z5267BH	Zener diode	71.25..78.75V, Izt=1.7mA Zzt=270Ω, 300mW	SOD-323	5d	1a	Zow
E3	-	MMBZ5233BV	Zener diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOD-523	6d	1a	Pjt
E3	-	MMSZ5233B	Zener diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123	5d	1d	Di
E3	-	MMSZ5233B-F	Zener diode	5.70..6.30V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr
E3	-	MMSZ5233BS	Zener diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOD-323	5d	1d	Di
E3	-	MMSZ5233BWS	Zener diode	5.70..6.30V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
E3	-	RKZ5.1B2KK	Zener diode	4.98..5.20V, Izt=5mA, Zzt=130Ω, 150mW	SFP	7d	1a	Ren
E3	-	RKZ5.1B2KL	Zener diode	4.98..5.20V, Izt=5mA, Zzt=130Ω, 100mW	EFP	7d	1a	Ren
E3	ag	MMSZ5233B	Zener diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123	5d	1d	Di
E30A	-	EGF30A	Si-diode	U-fast Rec. Rect., 50V, 3A, Vf<1V(3A), 50ns	DO-214AA	1d	1b	Zow
E30B	-	EGF30B	Si-diode	U-fast Rec. Rect., 100V, 3A, Vf<1V(3A), 50ns	DO-214AA	1d	1b	Zow
E30D	-	EGF30D	Si-diode	U-fast Rec. Rect., 200V, 3A, Vf<1V(3A), 50ns	DO-214AA	1d	1b	Zow

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
E30G	-	EGF30G	Si-diode	U-fast Rec. Rect., 400V, 3A, Vf<1.25V(3A), 50ns	DO-214AA	1d	1b	Zow
E30J	-	EGF30J	Si-diode	U-fast Rec. Rect., 600V, 3A, Vf<1.7V(3A), 75ns	DO-214AA	1d	1b	Zow
E30K	-	EGF30K	Si-diode	U-fast Rec. Rect., 800V, 3A, Vf<1.7V(3A), 75ns	DO-214AA	1d	1b	Zow
E30M	-	EGF30M	Si-diode	U-fast Rec. Rect., 1000V, 3A, Vf<1.7V(3A), 75ns	DO-214AA	1d	1b	Zow
E4	-	BZD27C13P	Zener diode	12.4..14.1V, Zzt=5Ω, Izt=50mA, 800mW	SOD-123FL	7d	1i	Vs
E4	-	BZD27C15P	Zener diode	13.8..15.6V, Zzt=5Ω, Izt=25mA, 1W	SOD-123FL	7d	2u	Tsc
E4	-	BZT52H-B27	Zener diode	27V±2%, Izt=5mA, Zzt=40Ω, 375mW	SOD-123FL	7d	1a	Phi
E4	-	BZX585-B8V2	Zener diode	8.2V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
E4	-	CZRH5234B-G	Zener diode	5.89..6.51V, Zzt=7Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
E4	-	CZRV5234B-G	Zener diode	5.89..6.51V, Zzt=7Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
E4	-	CZRW5234B-G	Zener diode	5.89..6.51V, Zzt=7Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
E4	-	FES26D	Si-diode	U-fast Recovery, 800V, 1A, <75ns	DO-214AC	1d	2j	Fag
E4	-	LMSZ5234BT1G	Zener diode	5.89..6.51V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
E4	-	MM1Z5227B	Zener diode	3.42..3.78V, Izt=20mA, Zzt=24Ω, 500mW	SOD-323FL	7d	1a	Eic
E4	-	MM1Z5227BH	Zener diode	3.42..3.78V, Izt=20mA, Zzt=24Ω, 500mW	SOD-123	5d	1a	Zow
E4	-	MM3Z5234B	Zener diode	5.89..6.51V, Izt=20mA, Zzt=7Ω, 200mW	SOD-323	5d	1a	Ext
E4	-	MMBZ5234BV	Zener diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOD-523	6d	1a	Pjt
E4	-	MMSZ5227B	Zener diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 500mW	SOD-123	5d	1a	Eic
E4	-	MMSZ5234B	Zener diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123	5d	1d	Di
E4	-	MMSZ5234B-F	Zener diode	5.89..6.51V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr
E4	-	MMSZ5234BS	Zener diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOD-323	5d	1d	Di
E4	-	MMSZ5234BWS	Zener diode	5.89..6.51V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
E4	-	OYD6V2T1	Zener diode	5.8...6.6V, Izt=5mA, Zzt=50Ω, 500mW	SOD-123	5d	1a	Ouy
E4	ag	MMSZ5234B	Zener diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123	5d	1d	Di
E5	-	BZD27C15P	Zener diode	13.8..15.6V, Zzt=5Ω, Izt=50mA, 800mW	SOD-123FL	7d	1i	Vs
E5	-	BZD27C16P	Zener diode	15.3..17.1V, Zzt=6Ω, Izt=25mA, 1W	SOD-123FL	7d	2u	Tsc
E5	-	BZT52H-B30	Zener diode	30.0V±2%, Izt=5mA, Zzt=40Ω, 375mW	SOD-123FL	7d	1a	Phi
E5	-	BZX584B9V1	Zener diode	8.92..9.28V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523FL	7d	1a	Tac
E5	-	BZX585-B9V1	Zener diode	9.1V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
E5	-	CZRH5235B-G	Zener diode	6.46..7.14V, Zzt=5Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
E5	-	CZRV5235B-G	Zener diode	6.46..7.14V, Zzt=5Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
E5	-	CZRW5235B-G	Zener diode	6.46..7.14V, Zzt=5Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
E5	-	EDZ33B	Zener diode	32.15..33.79V, Izt=2mA, Zzt=250Ω, 150mW	SOD-523	6d	1a	Rhm
E5	-	EDZV33B	Zener diode	32.15..33.79V, Izt=2.0mA, Zzt=250Ω, 150mW	SOD-523	6d	2v	Rhm
E5	-	FDZ33EV	Zener diode	32.150..33.790V, Izt=2mA, Zzt=250Ω, 150mW	SOD-523	6d	1a	Fis
E5	-	FDZ33VT	Zener diode	32.150..33.790V, Izt=5mA, Zzt=250Ω, 200mW	SOD-323	5d	1a	Fis
E5	-	FES26E	Si-diode	U-fast Recovery, 1000V, 1A, <75ns	DO-214AC	1d	2j	Fag
E5	-	LBZT52B33T1G	Zener diode	32.15..33.79V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
E5	-	LEDZ33BT1G	Zener diode	32.15..33.79V, Izt=2mA, 150mW	SOD-523	6d	1g	Lrc
E5	-	LMSZ5235BT1G	Zener diode	6.46..7.14V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
E5	-	LUDZS33BT1G	Zener diode	32.15..33.79V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
E5	-	MM1Z5246B	Zener diode	15.20..16.80V, Izt=7.8mA, Zzt=17Ω, 500mW	SOD-323FL	7d	1a	Eic
E5	-	MM1Z5246BH	Zener diode	15.2..16.8V, Izt=7.8mA, Zzt=17Ω, 500mW	SOD-123	5d	1a	Zow
E5	-	MM3Z5235B	Zener diode	6.46..7.14V, Izt=20mA, Zzt=5Ω, 200mW	SOD-323	5d	1a	Ext
E5	-	MM5Z9V1B	Zener diode	8.92..9.28V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523FL	7d	1a	Tac
E5	-	MMBZ5235BV	Zener diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 200mW	SOD-523	6d	1a	Pjt
E5	-	MMSZ5235B	Zener diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 500mW	SOD-123	5d	1d	Di
E5	-	MMSZ5235B-F	Zener diode	6.46..7.14V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr
E5	-	MMSZ5235BS	Zener diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 200mW	SOD-323	5d	1d	Di
E5	-	MMSZ5235BWS	Zener diode	6.46..7.14V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
E5	-	MMSZ5246B	Zener diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 500mW	SOD-123	5d	1a	Eic
E5	-	OYD6V8T1	Zener diode	6.4...7.2V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Ouy
E5	-	UDZS33B	Zener diode	32.15..33.79V, Izt=5mA, Zzt=250Ω, 200mW	SOD-323	5d	1a	Wtr
E5	-	UDZS33B	Zener diode	33V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
E5	-	UDZV33B	Zener diode	32.15..33.79V, Izt=5.0mA, Zzt=250Ω, 200mW	SOD-323	5d	2v	Rhm
E5	-	VDZS33B	Zener diode	33V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
E5	ag	MMSZ5235B	Zener diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 500mW	SOD-123	5d	1d	Di
E6	-	BZD27C16P	Zener diode	15.3..17.1V, Zzt=6Ω, Izt=25mA, 800mW	SOD-123FL	7d	1i	Vs
E6	-	BZD27C18P	Zener diode	16.8..19.1V, Zzt=6Ω, Izt=25mA, 1W	SOD-123FL	7d	2u	Tsc
E6	-	BZT52H-B33	Zener diode	33.0V±2%, Izt=5mA, Zzt=40Ω, 375mW	SOD-123FL	7d	1a	Phi
E6	-	BZX585-B10	Zener diode	10V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
E6	-	FES26F	Si-diode	U-fast Recovery, 1000V, 1A, <50ns	DO-214AC	1d	2j	Fag
E6	-	MM1Z5267B	Zener diode	71.25..78.75V, Izt=1.7mA, Zzt=270Ω, 500mW	SOD-323FL	7d	1a	Eic
E6	-	MM1Z5267BH	Zener diode	71.25..78.75V, Izt=1.7mA, Zzt=270Ω, 500mW	SOD-123	5d	1a	Zow
E6	-	MMSZ5231B-V-G	Zener diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 500mW	SOD-123	5d	1kb	Vs
E6	-	MMSZ5267B	Zener diode	75V±5%, Izt=1.7mA, Zzt=270Ω, 500mW	SOD-123	5d	1a	Eic
E6	-	RKZ5.6B2KK	Zener diode	5.49..5.73V, Izt=5mA, Zzt=80Ω, 150mW	SFP	7d	1a	Ren
E6	-	RKZ5.6B2KL	Zener diode	5.49..5.73V, Izt=5mA, Zzt=80Ω, 100mW	EFP	7d	1a	Ren
E6	-	SS1060VHEWS	Si-diode	SBR, 60V, 1A, Vf<0.6V(1A)	SOD-323HE	7d	1a	Pjt
E7	-	BZD27C18P	Zener diode	16.8..19.1V, Zzt=6Ω, Izt=25mA, 800mW	SOD-123FL	7d	1i	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
E7	-	BZT52H-B36	Zener diode	36.0V±2%, Izt=5mA, Zzt=60Ω, 375mW	SOD-123FL	7d	1a	Phi
E7	-	BZX585-B11	Zener diode	11V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
E7	-	MMSZ5232B-V-G	Zener diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 500mW	SOD-123	5d	1kb	Vs
E8	-	BZD27C20P	Zener diode	18.8..21.2V, Zzt=6Ω, Izt=25mA, 800mW	SOD-123FL	7d	1i	Vs
E8	-	BZT52C3V9WT	Zener diode	3.71..4.1V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Ttr
E8	-	BZT52H-B39	Zener diode	39.0V±2%, Izt=5mA, Zzt=75Ω, 375mW	SOD-123FL	7d	1a	Phi
E8	-	BZX585-B12	Zener diode	12V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
E8	-	MM5Z3V9	Zener diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Eic
E8	-	MM5Z3V9H	Zener diode	3.7..4.1V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Zow
E8	-	MMSZ5233B-V-G	Zener diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123	5d	1kb	Vs
E9	-	BZD27C22P	Zener diode	20.8..23.3V, Zzt=6Ω, Izt=25mA, 800mW	SOD-123FL	7d	1i	Vs
E9	-	BZT52C47WT	Zener diode	44.65..49.35V, Izt=5mA, Zzt=170Ω, 200mW	SOD-523	6d	1a	Ttr
E9	-	BZT52H-B43	Zener diode	43.0V±2%, Izt=5mA, Zzt=80Ω, 375mW	SOD-123FL	7d	1a	Phi
E9	-	BZX585-B13	Zener diode	13V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
E9	-	MM5Z47H	Zener diode	44..50V, Izt=1mA, Zzt=170Ω, 200mW	SOD-523	6d	1a	Zow
E9	-	MM5Z47V	Zener diode	47V±5%, Izt=2mA, Zzt=170Ω, 200mW	SOD-523	6d	1a	Eic
E9	-	MMSZ5234B-V-G	Zener diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123	5d	1kb	Vs
E9	-	RKZ6.2B2KK	Zener diode	6.06..6.33V, Izt=5mA, Zzt=50Ω, 150mW	SFP	7d	1a	Ren
E9	-	RKZ6.2B2KL	Zener diode	6.06..6.33V, Izt=5mA, Zzt=50Ω, 100mW	EFP	7d	1a	Ren
EA	-	BZT52H-B47	Zener diode	47.0V±2%, Izt=5mA, Zzt=90Ω, 375mW	SOD-123FL	7d	1a	Phi
EA	-	BZX585-B16	Zener diode	16V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
EA	-	EGF1A	Si-diode	Rectifier, 50V, 1A, Vf<1.0V(1A)	DO-214BA	1d	1k	Vs
EA	-	ES1A	Si-diode	Rectifier, 50V, 1A, Vf<0.92V(1A), Cd=7pF	DO-214AC	1d	1k	Vs
EA	-	ES2A	Si-diode	Rectifier, 50V, 2A, Vf<0.9V(2A), Cd=18pF	DO-214AA	1d	1k	Vs
EA	-	ES3A	Si-diode	Rectifier, 50V, 3A, Vf<0.9V(3A), Cd=45pF	DO-214AB	1d	1k	Vs
EA	-	LMSZ4711T1G	Zener diode	25.65..28.35V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
EA	-	MMSZ4711	Zener diode	27V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
EA	-	MMSZ4711-F	Zener diode	25.7..28.4V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
EA	-	SS3020HE	Si-diode	SBR, 20V, 3A, Vf<0.52V(3A)	SOD-123HE	7d	1a	Pjt
EA	-	TV06B141KB-G	TVS	Vrwm=140V, Vbr=155.68..190.40V, Ipp=2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EA	-	Z1SMA5V1	Zener diode	4.8..5.4V, Izt=100mA, Zzt=4Ω, 1W	DO-214AC	1d	1ab	Ttr
EAL	-	FES1AL	Si-diode	U-fast Recovery, 50V, 1A, Vf<0.95V(1A), <35ns	DO-219AA	7d	2n	Fag
EB	-	BZT52B4V7WS	Zener diode	4.606..4.794V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
EB	-	BZT52H-B51	Zener diode	51.0V±2%, Izt=5mA, Zzt=100Ω, 375mW	SOD-123FL	7d	1a	Phi
EB	-	BZX585-B18	Zener diode	18V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
EB	-	EGF1B	Si-diode	Rectifier, 100V, 1A, Vf<1.0V(1A)	DO-214BA	1d	1k	Vs
EB	-	ES1B	Si-diode	Rectifier, 100V, 1A, Vf<0.92V(1A), Cd=7pF	DO-214AC	1d	1k	Vs
EB	-	ES1PB	Si-diode	Rectifier, 100V, 1A, Vf<0.92V(1A)	DO-220AA	8d	1k	Vs
EB	-	ES2B	Si-diode	Rectifier, 100V, 2A, Vf<0.9V(2A), Cd=18pF	DO-214AA	1d	1k	Vs
EB	-	ES3B	Si-diode	Rectifier, 100V, 3A, Vf<0.9V(3A), Cd=45pF	DO-214AB	1d	1k	Vs
EB	-	MM3Z4B7H	Zener diode	4.606..4.794V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Zow
EB	-	SC802-04	Si-diode	SBD, Sw, 40V, 1A, Vf<0.56V(1A)	SC	1d	2q	Fji
EB	-	SS3030HE	Si-diode	SBR, 30V, 3A, Vf<0.52V(3A)	SOD-123HE	7d	1a	Pjt
EB	-	STZ8047B	Zener diode	4.59..4.83V, Izt=5mA, Zzt=80Ω, 300mW	SOD-323	5d	1a	Jiy
EB	-	TV06B141JB-G	TVS	Vrwm=140V, Vbr=155.0..171.0V, Ipp=2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EB	-	Z1SMA5V6	Zener diode	5.2..6.0V, Izt=100mA, Zzt=2Ω, 1W	DO-214AC	1d	1ab	Ttr
EBA	-	SMAJ43CA	TVS	Vrwm=43V, Vbr=47.8..52.8V, 5.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
EBF	-	SMAJ58CA	TVS	Vrwm=58V, Vbr=64.4..71.2V, 4.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
EBI	-	SMAJ70CA	TVS	Vrwm=70V, Vbr=77.8..86V, 3.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
EBL	-	FES1BL	Si-diode	U-fast Recovery, 100V, 1A, Vf<0.95V(1A), <35ns	DO-219AA	7d	2n	Fag
EBL	-	SMAJ85CA	TVS	Vrwm=85V, Vbr=94.4..104V, 2.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
EBN	-	SMAJ100CA	TVS	Vrwm=100V, Vbr=111..136V, 2.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
EBQ	-	SMAJ130CA	TVS	Vrwm=130V, Vbr=144..159V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
EBT	-	SMAJ154CA	TVS	Vrwm=154V, Vbr=167..185V, 1.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
EBV	-	SMAJ188CA	TVS	Vrwm=188V, Vbr=209..231V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
EC	-	BZT52B5V1WS	Zener diode	4.998..5.202V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
EC	-	BZT52H-B56	Zener diode	56.0V±2%, Izt=2mA, Zzt=120Ω, 375mW	SOD-123FL	7d	1a	Phi
EC	-	BZX585-B20	Zener diode	20V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
EC	-	EGF1C	Si-diode	Rectifier, 150V, 1A, Vf<1.0V(1A)	DO-214BA	1d	1k	Vs
EC	-	ES1C	Si-diode	Rectifier, 150V, 1A, Vf<0.92V(1A), Cd=7pF	DO-214AC	1d	1k	Vs
EC	-	ES1PC	Si-diode	Rectifier, 150V, 1A, Vf<1.0V(1A)	DO-220AA	8d	1k	Vs
EC	-	ES2C	Si-diode	Rectifier, 150V, 2A, Vf<0.9V(2A), Cd=18pF	DO-214AA	1d	1k	Vs
EC	-	ES3C	Si-diode	Rectifier, 150V, 3A, Vf<0.9V(3A), Cd=45pF	DO-214AB	1d	1k	Vs
EC	-	GBLC15CI	TVS	Vrwm=15V, 1A, 350W(1ms), 0.6pF, Bidir.	SOD-323	5ba	1e	Prt
EC	-	LMSZ4712T1G	Zener diode	26.6..29.4V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
EC	-	MM3Z5B1H	Zener diode	4.998..5.202V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Zow
EC	-	MMSZ4712	Zener diode	28V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
EC	-	MMSZ4712-F	Zener diode	26.6..29.4V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
EC	-	SC802-06	Si-diode	SBD, Sw, 60V, 1A, Vf<0.68V(1A)	SC	1d	2q	Fji
EC	-	SS3040HE	Si-diode	SBR, 40V, 3A, Vf<0.52V(3A)	SOD-123HE	7d	1a	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
EC	-	STZ8051B	Zener diode	5.0..5.26V, Izt=5mA, Zzt=60Ω, 300mW	SOD-323	5d	1a	Jiy
EC	-	Z1SMA6V2	Zener diode	5.8..6.6V, Izt=100mA, Zzt=2Ω, 1W	DO-214AC	1d	1ab	Ttr
EC	-	Z1SMA6V2	Zener diode	6.2V±5%, Izt=100mA, 1.3W	DO-214AC	1d	2j	Fag
ECL	-	FES1CL	Si-diode	U-fast Recovery, 150V, 1A, Vf<0.95V(1A), <35ns	DO-219AA	7d	2n	Fag
ECL	-	FES1DL	Si-diode	U-fast Recovery, 200V, 1A, Vf<0.95V(1A), <35ns	DO-219AA	7d	2n	Fag
ED	-	BZT52H-B62	Zener diode	62.0V±2%, Izt=2mA, Zzt=140Ω, 375mW	SOD-123FL	7d	1a	Phi
ED	-	BZX585-B22	Zener diode	22V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
ED	-	EGF1D	Si-diode	Rectifier, 200V, 1A, Vf<1.0V(1A)	DO-214BA	1d	1k	Vs
ED	-	ES1D	Si-diode	Rectifier, 200V, 1A, Vf<0.92V(1A), Cd=7pF	DO-214AC	1d	1k	Vs
ED	-	ES1PD	Si-diode	Rectifier, 200V, 1A, Vf<1.0V(1A)	DO-220AA	8d	1k	Vs
ED	-	ES2D	Si-diode	Rectifier, 200V, 2A, Vf<0.9V(2A), Cd=18pF	DO-214AA	1d	1k	Vs
ED	-	ES3D	Si-diode	Rectifier, 200V, 3A, Vf<0.9V(3A), Cd=45pF	DO-214AB	1d	1k	Vs
ED	-	KDZ30B	Zener diode	30V±2.5%, 10mA, 1W	PMDU	7d	1s	Rhm
ED	-	LMSZ4713T1G	Zener diode	28.5..31.5V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
ED	-	MMSZ4713	Zener diode	30V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
ED	-	MMSZ4713-F	Zener diode	28.5..31.5V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
ED	-	P6SMBJ110C	TVS	Vrwm=110V, Vbr=99..121V, 3.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
ED	-	SC802-09	Si-diode	SBD, Sw, 90V, 1A, Vf<0.85V(1A)	SC	1d	2q	Fji
ED	-	SM6T18	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, 24A, 600W(1ms)	DO-214AA	1d	1q	Ste
ED	-	SMBG110C	TVS	Vrwm=110V, Vbr=122..140.5V, 3.4A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
ED	-	SMBJ110C	TVS	Vrwm=110V, Vbr=122..140.5V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
ED	-	SS3060HE	Si-diode	SBR, 60V, 3A, Vf<0.65V(3A)	SOD-123HE	7d	1a	Pjt
ED	-	STZ8056B	Zener diode	5.48..5.76V, Izt=5mA, Zzt=40Ω, 300mW	SOD-323	5d	1a	Jiy
ED	-	TV06B111KB-G	TVS	Vrwm=110.0V, Vbr=122.0..149.0V, Ipp=3.06A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
ED	-	Z1SMA7V5	Zener diode	7.0..7.9V, Izt=100mA, Zzt=3Ω, 1W	DO-214AC	1d	1ab	Ttr
ED	-	Z1SMA7V5	Zener diode	7.5V±5%, Izt=100mA, 1.3W	DO-214AC	1d	2j	Fag
EDJ	-	1.5SMC18	TVS	Vrwm=14.5V, Vbr=16.2..19.8V, Ipp=56.5A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
EDL	-	FES1FL	Si-diode	U-fast Recovery, 300V, 1A, Vf<1.3V(1A), <35ns	DO-219AA	7d	2n	Fag
EDP	-	TPSMC18	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 56.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EE	-	BZT52B6V2WS	Zener diode	6.076..6.324V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
EE	-	BZT52H-B68	Zener diode	68.0V±2%, Izt=2mA, Zzt=160Ω, 375mW	SOD-123FL	7d	1a	Phi
EE	-	BZX585-B24	Zener diode	24V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
EE	-	CD214B-T110CA	TVS	Vrwm=110V, Irsm=3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
EE	-	LMSZ4714T1G	Zener diode	31.35..34.65V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
EE	-	MM3Z6B2H	Zener diode	6.076..6.324V, Izt=5mA, Zzt=50Ω, 300mW	SOD-323	5d	1a	Zow
EE	-	MMSZ4714	Zener diode	33V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
EE	-	MMSZ4714-F	Zener diode	31.4..34.7V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
EE	-	P6SMBJ110CA	TVS	Vrwm=110V, Vbr=105..116V, 4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
EE	-	SM6T18A	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, 24A, 600W(1ms)	DO-214AA	1d	1a	Mde
EE	-	SMBG110CA	TVS	Vrwm=110V, Vbr=122..140.5V, 3.4A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
EE	-	SMBJ110CA	TVS	Vrwm=110V, Vbr=122..140.5V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
EE	-	SMBJ110CA	TVS	Vrwm=110V, Vbr=122..140.5V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
EE	-	TV06B111JB-G	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=3.39A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EE	-	Z1SMA6V8	Zener diode	6.4..7.2V, Izt=100mA, Zzt=2.5Ω, 1W	DO-214AC	1d	1ab	Ttr
EE	-	Z1SMA6V8	Zener diode	6.8V±5%, Izt=100mA, 1.3W	DO-214AC	1d	2j	Fag
EEJ	-	1.5SMC18A	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, Ipp=59.5A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
EEP	-	TPSMC18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 59.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EF	-	BZT52B6V8WS	Zener diode	6.664..6.936V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
EF	-	BZT52H-B75	Zener diode	75.0V±2%, Izt=2mA, Zzt=175Ω, 375mW	SOD-123FL	7d	1a	Phi
EF	-	BZX585-B27	Zener diode	27V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
EF	-	ES2F	Si-diode	Rectifier, 300V, 2A, Vf<1.1V(2A)	DO-214AA	1d	1k	Vs
EF	-	ES3F	Si-diode	Rectifier, 300V, 3A, Vf<1.1V(2A)	DO-214AB	1d	1k	Vs
EF	-	KDZ9.1FV	Zener diode	8.50..9.60V, Izt=5mA, Zzt=18Ω, 100mW	TFSC	7d	1a	Kec
EF	-	LMSZ4715T1G	Zener diode	34.2..37.8V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
EF	-	MAZD082	Zener diode	7.7..8.7V, Zzt=20Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
EF	-	MM3Z6B8H	Zener diode	6.664..6.936V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Zow
EF	-	MMSZ4715	Zener diode	36V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
EF	-	MMSZ4715-F	Zener diode	34.2..37.8V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
EF	-	P6SMBJ120C	TVS	Vrwm=120V, Vbr=108..132V, 3.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
EF	-	SMBG120C	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
EF	-	SMBJ120C	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
EF	-	SS30100HE	Si-diode	SBR, 100V, 3A, Vf<0.8V(3A)	SOD-123HE	7d	1a	Pjt
EF	-	TV06B121KB-G	TVS	Vrwm=120.0V, Vbr=133.0..163.0V, Ipp=2.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EF	-	Z1SMA8V2	Zener diode	7.7..8.7V, Izt=100mA, Zzt=3.5Ω, 1W	DO-214AC	1d	1ab	Ttr
EF	-	Z1SMA8V2	Zener diode	8.2V±5%, Izt=100mA, 1.3W	DO-214AC	1d	2j	Fag
EFJ	-	1.5SMC20	TVS	Vrwm=16.2V, Vbr=18..22V, Ipp=51.5A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
EFP	-	TPSMC20	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 51.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EG	-	BZX585-B30	Zener diode	30V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
EG	-	CD214B-T120CA	TVS	Vrwm=120V, Irsm=3.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
EG	-	ES2G	Si-diode	Rectifier, 400V, 2A, Vf<1.1V(2A)	DO-214AA	1d	1k	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
EG	-	ES3G	Si-diode	Rectifier, 400V, 3A, Vf<1.1V(2A)	DO-214AB	1d	1k	Vs
EG	-	P6SMBJ120CA	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
EG	-	SMBG120CA	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
EG	-	SMBJ120CA	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
EG	-	SMBJ120CA	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
EG	-	TV06B121JB-G	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=3.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EG	-	Z1SMA9V1	Zener diode	8.5..9.6V, Izt=50mA, Zzt=4Ω, 1W	DO-214AC	1d	1ab	Ttr
EG	-	Z1SMA9V1	Zener diode	9.1V±5%, Izt=50mA, 1.3W	DO-214AC	1d	2j	Fag
EGJ	-	1.5SMC20A	TVS	Vrwm=17.1V, Vbr=19..21V, Ipp=54A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
EGL	-	FES1GL	Si-diode	U-fast Recovery, 400V, 1A, Vf<1.3V(1A), <35ns	DO-219AA	7d	2n	Fag
EGP	-	TPSMC20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 54.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EH	-	BZT52B7V5WS	Zener diode	7.350..7.650V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
EH	-	BZX585-B33	Zener diode	33V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
EH	-	LMSZ4716T1G	Zener diode	37.05..40.95V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
EH	-	MM3Z7B5H	Zener diode	7.35..7.65V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Zow
EH	-	MMSZ4716	Zener diode	39V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
EH	-	MMSZ4716-F	Zener diode	37.1..41.0V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
EH	-	P6SMBJ130C	TVS	Vrwm=130V, Vbr=117..143V, 3.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
EH	-	SM6T22	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, 20A, 600W(1ms)	DO-214AA	1ba	1r	Ste
EH	-	SMBG130C	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
EH	-	SMBJ130C	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
EH	-	SS30150HE	Si-diode	SBR, 150V, 3A, Vf<0.86V(3A)	SOD-123HE	7d	1a	Pjt
EH	-	TV06B131KB-G	TVS	Vrwm=130V, Vbr=144.0..176.0V, Ipp=2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EH	-	Z1SMA10	Zener diode	10V±5%, Izt=50mA, 1.3W	DO-214AC	1d	2j	Fag
EH	-	Z1SMA10	Zener diode	9.4..10.6V, Izt=50mA, Zzt=4Ω, 1W	DO-214AC	1d	1ab	Ttr
EHB	-	ES1HB	Si-diode	Rectifier, 100V, 1A, Vf<0.92V(1A)	DO-214AC	1d	1k	Vs
EHB	-	ESH1B	Si-diode	Rectifier, 100V, 1A, Vf<0.9V(1A)	DO-214AC	1d	1k	Vs
EHB	-	ESH2B	Si-diode	Rectifier, 100V, 2A, Vf<0.93V(2A)	DO-214AA	1d	1k	Vs
EHB	-	ESH3B	Si-diode	Rectifier, 100V, 3A, Vf<0.9V(1A)	DO-214AB	1d	1k	Vs
EHC	-	ESH1C	Si-diode	Rectifier, 150V, 1A, Vf<0.9V(1A)	DO-214AC	1d	1k	Vs
EHC	-	ESH2C	Si-diode	Rectifier, 150V, 2A, Vf<0.93V(2A)	DO-214AA	1d	1k	Vs
EHC	-	ESH3C	Si-diode	Rectifier, 150V, 3A, Vf<0.9V(1A)	DO-214AB	1d	1k	Vs
EHD	-	ESH1D	Si-diode	Rectifier, 200V, 1A, Vf<0.9V(1A)	DO-214AC	1d	1k	Vs
EHD	-	ESH2D	Si-diode	Rectifier, 200V, 2A, Vf<0.93V(2A)	DO-214AA	1d	1k	Vs
EHD	-	ESH3D	Si-diode	Rectifier, 100V, 3A, Vf<0.9V(1A)	DO-214AB	1d	1k	Vs
EHJ	-	1.5SMC22	TVS	Vrwm=17.8V, Vbr=19.8..24.2V, Ipp=47A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
EHL	-	FES1HL	Si-diode	U-fast Recovery, 500V, 1A, Vf<1.7V(1A), <35ns	DO-219AA	7d	2n	Fag
EHP	-	TPSMC22	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 47.0A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EJ	-	BZT52B8V2WS	Zener diode	8.036..8.364V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
EJ	-	LMSZ4717T1G	Zener diode	40.85..45.15V, Izt=0.05mA, 500mW	SOD-123	5d	1d	Lrc
EJ	-	MM3Z8B2H	Zener diode	8.036..8.364V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Zow
EJ	-	MMSZ4717	Zener diode	43V±5%, Izt=50µA, 500mW	SOD-123	5d	1u	Ons
EJ	-	MMSZ4717-F	Zener diode	40.9..45.2V, Izt=0.05mA, 500mW	SOD-123F	7d	1a	Ttr
EJ	-	SS30200HE	Si-diode	SBR, 200V, 3A, Vf<0.86V(3A)	SOD-123HE	7d	1a	Pjt
EJ	-	STZ8082B	Zener diode	8.03..8.43V, Izt=5mA, Zzt=20Ω, 300mW	SOD-323	5d	1a	Jiy
EJL	-	FES1JL	Si-diode	U-fast Recovery, 600V, 1A, Vf<1.7V(1A), <35ns	DO-219AA	7d	2n	Fag
EK	-	BZT52B9V1WS	Zener diode	8.918..9.282V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
EK	-	BZX585-B36	Zener diode	36V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
EK	-	CD214B-T130CA	TVS	Vrwm=130V, Irsm=2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
EK	-	MM3Z9B1H	Zener diode	8.918..9.282V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Zow
EK	-	P6SMBJ130CA	TVS	Vrwm=130V, Vbr=124..137V, 3.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
EK	-	PMEG3015EJ	Si-diode	SBR, 30V, 1.5A, Vf<0.55V(1.5A), <72pF	SOD-323F	6d	1a	Phi
EK	-	SM6T22A	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, 20A, 600W(1ms)	DO-214AA	1d	1a	Mde
EK	-	SMBG130CA	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
EK	-	SMBJ130CA	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
EK	-	SMBJ130CA	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
EK	-	STZ8091B	Zener diode	8.87..9.33V, Izt=5mA, Zzt=20Ω, 300mW	SOD-323	5d	1a	Jiy
EK	-	TV06B131JB-G	TVS	Vrwm=130V, Vbr=144.0..159.0V, Ipp=2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EK	-	Z1SMA11	Zener diode	10.4..11.6V, Izt=50mA, Zzt=7Ω, 1W	DO-214AC	1d	1ab	Ttr
EK	-	Z1SMA11	Zener diode	11V±5%, Izt=50mA, 1.3W	DO-214AC	1d	2j	Fag
EKJ	-	1.5SMC22A	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, Ipp=49A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
EKP	-	TPSMC22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 49.0A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EL	-	BZX585-B39	Zener diode	39V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
EL	-	P6SMBJ150C	TVS	Vrwm=150V, br=135..165V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
EL	-	SM6T24	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, 18A, 600W(1ms)	DO-214AA	1d	1q	Ste
EL	-	SMBG150C	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
EL	-	SMBJ150C	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
EL	-	TV06B151KB-G	TVS	Vrwm=150.0V, Vbr=167.0..204.0V, Ipp=2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EL	-	Z1SMA12	Zener diode	11.4..12.7V, Izt=50mA, Zzt=7Ω, 1W	DO-214AC	1d	1ab	Ttr
EL	-	Z1SMA12	Zener diode	120V±5%, Izt=50mA, 1.3W	DO-214AC	1d	2j	Fag

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
ELJ	-	1.5SMC24	TVS	Vrwm=19.4V, Vbr=21.6..26.4V, Ipp=43A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
ELP	-	TPSMC24	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 43.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EM	-	BZT52B10WS	Zener diode	9.80..10.20V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
EM	-	BZX585-B43	Zener diode	43V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
EM	-	CD214B-T150CA	TVS	Vrwm=150V, Irsm=2.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
EM	-	MM3ZB10H	Zener diode	9.8..10.2V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Zow
EM	-	P6SMBJ150CA	TVS	Vrwm=150V, br=135..165V, 2.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
EM	-	SM6T24A	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, 18A, 600W(1ms)	DO-214AA	1d	1a	Mde
EM	-	SMBG150CA	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
EM	-	SMBJ150CA	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
EM	-	SMBJ150CA	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
EM	-	SS1040HE	Si-diode	SBR, 40V, 1A, Vf<0.55V(1A)	SOD-123HE	7d	1a	Pjt
EM	-	TV06B151JB-G	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=2.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EM	-	Z1SMA13	Zener diode	12.4..14.1V, Izt=50mA, Zzt=10Ω, 1W	DO-214AC	1d	1ab	Ttr
EM	-	Z1SMA13	Zener diode	130V±5%, Izt=50mA, 1.3W	DO-214AC	1d	2j	Fag
EMJ	-	1.5SMC24A	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, Ipp=45A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
EMP	-	TPSMC24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 45.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EN	-	BZT52B11WS	Zener diode	10.78..11.22V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
EN	-	BZX585-B47	Zener diode	47V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
EN	-	MM3ZB11H	Zener diode	10.78..11.22V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Zow
EN	-	P6SMBJ160C	TVS	Vrwm=160V, Vbr=144..176V, 2.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
EN	-	SM6T27	TVS	Vrwm=23.1V, Vbr=25.7..28.4V, 16A, 600W(1ms)	DO-214AA	1d	1q	Ste
EN	-	SMBG160C	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
EN	-	SMBJ160C	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
EN	-	SS1060HE	Si-diode	SBR, 60V, 1A, Vf<0.70V(1A)	SOD-123HE	7d	1a	Pjt
EN	-	STZ8110B	Zener diode	10.73..11.28V, Izt=5mA, Zzt=30Ω, 300mW	SOD-323	5d	1a	Jiy
EN	-	TV06B161KB-G	TVS	Vrwm=160.0V, Vbr=178.0..218.0V, Ipp=2.09A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EN	-	Z1SMA15	Zener diode	13.8..15.6V, Izt=50mA, Zzt=10Ω, 1W	DO-214AC	1d	1ab	Ttr
EN	-	Z1SMA15	Zener diode	15V±5%, Izt=50mA, 1.3W	DO-214AC	1d	2j	Fag
ENJ	-	1.5SMC27	TVS	Vrwm=21.8V, Vbr=24.3..29.7V, Ipp=38.5A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
ENP	-	TPSMC27	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 38.4A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EP	-	BZT52B12WS	Zener diode	11.76..12.24V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
EP	-	BZX585-B51	Zener diode	51V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
EP	-	CD214B-T160CA	TVS	Vrwm=160V, Irsm=2.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
EP	-	CMDZ3L0	Zener diode	2.850..3.150V, Izt=0.5mA, Zzt=900Ω, 250mW	SOD-323	5d	1a	Cen
EP	-	KDZ9.1VY	Zener diode	8.85..9.23V, Izt=5mA, Zzt=18Ω, 100mW	TFSC	7d	1a	Kec
EP	-	MM3ZB12H	Zener diode	11.76..12.24V, Izt=5mA, Zzt=35Ω, 300mW	SOD-323	5d	1a	Zow
EP	-	P6SMBJ160CA	TVS	Vrwm=160V, Vbr=144..176V, 2.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
EP	-	SM6T27A	TVS	Vrwm=23.1V, Vbr=25.7..28.4V, 16A, 600W(1ms)	DO-214AA	1d	1a	Mde
EP	-	SMBG160CA	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
EP	-	SMBJ160CA	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
EP	-	TV06B161JB-G	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=2.32A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EP	-	Z1SMA16	Zener diode	15.3..17.1V, Izt=25mA, Zzt=15Ω, 1W	DO-214AC	1d	1ab	Ttr
EP	-	Z1SMA16	Zener diode	16V±5%, Izt=25mA, 1.3W	DO-214AC	1d	2j	Fag
EPJ	-	1.5SMC27A	TVS	Vrwm=23.1V, Vbr=25.7..28.4 V, Ipp=40A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
EPP	-	TPSMC27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 40.0A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EQ	-	P6SMBJ170C	TVS	Vrwm=170V, Vbr=153..187V, 2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
EQ	-	SM6T30	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, 14.5A, 600W(1ms)	DO-214AA	1d	1q	Ste
EQ	-	SMBG170C	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
EQ	-	SMBJ170C	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
EQ	-	TV06B171KB-G	TVS	Vrwm=170.0V, Vbr=189.0..231.0V, Ipp=1.97A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EQ	-	Z1SMA18	Zener diode	16.8..19.1V, Izt=25mA, Zzt=15Ω, 1W	DO-214AC	1d	1ab	Ttr
EQ	-	Z1SMA18	Zener diode	18V±5%, Izt=25mA, 1.3W	DO-214AC	1d	2j	Fag
EQJ	-	1.5SMC30	TVS	Vrwm=24.3V, Vbr=27..33V, Ipp=34.5A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
EQP	-	TPSMC30	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 34.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
ER	-	BZT52B13WS	Zener diode	12.74..13.26V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
ER	-	BZX585-B56	Zener diode	56V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
ER	-	CD214B-T170CA	TVS	Vrwm=170V, Irsm=2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Brn
ER	-	MM3ZB13H	Zener diode	12.74..13.26V, Izt=5mA, Zzt=35Ω, 300mW	SOD-323	5d	1a	Zow
ER	-	P6SMBJ170CA	TVS	Vrwm=170V, Vbr=153..187V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
ER	-	PZU8.2B1A/DG	Zener diode	8.2V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
ER	-	SM6T30A	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, 14.5A, 600W(1ms)	DO-214AA	1d	1a	Mde
ER	-	SMBG170CA	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
ER	-	SMBJ170CA	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
ER	-	SMBJ170CA	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
ER	-	STZ8130B	Zener diode	12.73..13.4V, Izt=5mA, Zzt=35Ω, 300mW	SOD-323	5d	1a	Jiy
ER	-	TV06B171JB-G	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=2.18A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
ER	-	Z1SMA20	Zener diode	18.8..21.2V, Izt=25mA, Zzt=15Ω, 1W	DO-214AC	1d	1ab	Ttr
ER	-	Z1SMA20	Zener diode	20V±5%, Izt=25mA, 1.3W	DO-214AC	1d	2j	Fag
ERJ	-	1.5SMC30A	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, Ipp=36A, 1500W(1ms)	DO-214AB	1d	1b	Tsc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
ERL	-	SS10150HE	Si-diode	SBR, 150V, 1A, Vf<0.85V(1A)	SOD-123HE	7d	1a	Pjt
ERP	-	TPSMC30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 36.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
ES	-	BZX585-B62	Zener diode	62V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
ES	-	P6SMBJ180C	TVS	Vrwm=180V, Vbr=162..198V, 1.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
ES	-	PZU8.2B2A/DG	Zener diode	8.2V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
ES	-	SM6T33	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, 13.1A, 600W(1ms)	DO-214AA	1d	1q	Ste
ES	-	SMBG188CA	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
ES	-	SMBJ188CA	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
ES	-	SS10200HE	Si-diode	SBR, 200V, 1A, Vf<0.85V(1A)	SOD-123HE	7d	1a	Pjt
ES	-	TV06B181KB-G	TVS	Vrwm=180.0V, Vbr=200.16..244.80V, Ipp=1.86A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
ES	-	Z1SMA22	Zener diode	20.8..23.3V, Izt=25mA, Zzt=15Ω, 1W	DO-214AC	1d	1ab	Ttr
ES	-	Z1SMA22	Zener diode	22V±5%, Izt=25mA, 1.3W	DO-214AC	1d	2j	Fag
ESJ	-	1.5SMC33	TVS	Vrwm=26.8V, Vbr=29.7..36.3V, Ipp=31.5A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
ESP	-	TPSMC33	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 31.4A, 1500W(1ms)	DO-214AB	1d	1k	Vs
ET	-	BZX585-B68	Zener diode	68V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
ET	-	EGF1T	Si-diode	Rectifier, 1300V, 1A, Vf<3.0V(1A)	DO-214BA	1d	1k	Vs
ET	-	P6SMBJ180CA	TVS	Vrwm=180V, Vbr=162..198V, 2.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
ET	-	PZU8.2B3A/DG	Zener diode	8.2V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
ET	-	SM6T33A	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, 13.1A, 600W(1ms)	DO-214AA	1d	1a	Mde
ET	-	SMBG188C	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms), Bidir.	DO-215AA	5ba	1l	Vs
ET	-	SMBJ188C	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
ET	-	SS1030HEWS	Si-diode	SBR, 30V, 1A, Vf<0.47V(1A)	SOD-323HE	7d	1a	Pjt
ET	-	TV06B181JB-G	TVS	Vrwm=180.0V, Vbr=200.0..220.0V, Ipp=2.06A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
ET	-	Z1SMA24	Zener diode	22.8..25.6V, Izt=25mA, Zzt=15Ω, 1W	DO-214AC	1d	1ab	Ttr
ET	-	Z1SMA24	Zener diode	24V±5%, Izt=25mA, 1.3W	DO-214AC	1d	2j	Fag
ETJ	-	1.5SMC33A	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, Ipp=33A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
ETP	-	TPSMC33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 32.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EU	-	BZX585-B75	Zener diode	75V±2%, If=200mA, 300mW	SOD-523	6d	1a	Phi
EU	-	P6SMBJ190C	TVS	Vrwm=190V, Vbr=209..267.9V, 1.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
EU	-	PZU9.1BA/DG	Zener diode	9.1V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
EU	-	SM6T36	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, 12A, 600W(1ms)	DO-214AA	1d	1q	Ste
EU	-	SS1030LHEWS	Si-diode	SBR, 30V, 1A, Vf<0.39V(1A)	SOD-323HE	7d	1a	Pjt
EU	-	TV06B191KB-G	TVS	Vrwm=190.0V, Vbr=211.28..258.0V, Ipp=1.76A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EU	-	Z1SMA27	Zener diode	25.1..28.9V, Izt=25mA, Zzt=15Ω, 1W	DO-214AC	1d	1ab	Ttr
EU	-	Z1SMA27	Zener diode	27V±5%, Izt=25mA, 1.3W	DO-214AC	1d	2j	Fag
EUA	-	SMAJ43A	TVS	Vrwm=43V, Vbr=47.8..52.8V, 5.7A, 400W(1ms)	DO-214AC	1d	1q	Ste
EUF	-	SMAJ58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, 4.3A, 400W(1ms)	DO-214AC	1d	1q	Ste
EUI	-	SMAJ70A	TVS	Vrwm=70V, Vbr=77.8..86V, 3.5A, 400W(1ms)	DO-214AC	1d	1q	Ste
EUJ	-	1.5SMC36	TVS	Vrwm=29.1V, Vbr=32.4..39.6V, Ipp=29A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
EUL	-	SMAJ85A	TVS	Vrwm=85V, Vbr=94.4..104V, 2.9A, 400W(1ms)	DO-214AC	1d	1q	Ste
EUN	-	SMAJ100A	TVS	Vrwm=100V, Vbr=111..136V, 2.5A, 400W(1ms)	DO-214AC	1d	1q	Ste
EUP	-	TPSMC36	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 28.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EUQ	-	SMAJ130A	TVS	Vrwm=130V, Vbr=144..159V, 1.9A, 400W(1ms)	DO-214AC	1d	1q	Ste
EUT	-	SMAJ154A	TVS	Vrwm=154V, Vbr=167..185V, 1.6A, 400W(1ms)	DO-214AC	1d	1q	Ste
EUV	-	SMAJ188A	TVS	Vrwm=188V, Vbr=209..231V, 1.4A, 400W(1ms)	DO-214AC	1d	1q	Ste
EV	-	P6SMBJ190CA	TVS	Vrwm=190V, Vbr=209..267.9V, 2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
EV	-	PZU9.1B1A/DG	Zener diode	9.1V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
EV	-	SM6T36A	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, 12A, 600W(1ms)	DO-214AA	1d	1a	Mde
EV	-	SS1040HEWS	Si-diode	SBR, 40V, 1A, Vf<0.58V(1A)	SOD-323HE	7d	1a	Pjt
EV	-	TV06B191JB-G	TVS	Vrwm=190.0V, Vbr=211.0..232.0V, Ipp=1.95A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EV	-	Z1SMA30	Zener diode	28..32V, Izt=25mA, Zzt=15Ω, 1W	DO-214AC	1d	1ab	Ttr
EV	-	Z1SMA30	Zener diode	30V±5%, Izt=25mA, 1.3W	DO-214AC	1d	2j	Fag
EVJ	-	1.5SMC36A	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, Ipp=30A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
EVP	-	TPSMC36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 30.1A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EW	-	P6SMBJ200C	TVS	Vrwm=200V, Vbr=180..220V, 1.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
EW	-	PZU9.1B2A/DG	Zener diode	9.1V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
EW	-	SM6T39	TVS	Vrwm=33.3V, Vbr=37.1..41V, 11.1A, 600W(1ms)	DO-214AA	1d	1q	Ste
EW	-	TV06B201JB-G	TVS	Vrwm=200.0V, Vbr=224.0..247.0V, Ipp=1.85A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EW	-	Z1SMA33	Zener diode	31..35V, Izt=25mA, Zzt=15Ω, 1W	DO-214AC	1d	1ab	Ttr
EW	-	Z1SMA33	Zener diode	33V±5%, Izt=25mA, 1.3W	DO-214AC	1d	2j	Fag
EWA	-	P6SMB200	TVS	Vrwm=200V, Vbr=190..210V, 2.2A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EWB	-	P6SMB200A	TVS	Vrwm=200V, Vbr=190..210V, 2.2A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EWC	-	P6SMB220	TVS	Vrwm=220V, Vbr=209..231V, 1.83A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EWD	-	P6SMB220A	TVS	Vrwm=220V, Vbr=209..231V, 1.83A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EWE	-	P6SMB250	TVS	Vbr=237..263V, Vrwm=214V, 1.75A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EWF	-	P6SMB250A	TVS	Vbr=237..263V, Vrwm=214V, 1.75A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EWJ	-	1.5SMC39	TVS	Vrwm=31.6V, Vbr=35.1..42.9V, Ipp=26.5A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
EWP	-	TPSMC39	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 26.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EX	-	BZT52B15WS	Zener diode	14.70..15.30V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
EX	-	MM3ZB15H	Zener diode	14.7..15.3V, Izt=5mA, Zzt=40Ω, 300mW	SOD-323	5d	1a	Zow

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
EX	-	PZU9.1B3A/DG	Zener diode	9.1V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
EX	-	SM6T39A	TVS	Vrwm=33.3V, Vbr=37.1..41V, 11.1A, 600W(1ms)	DO-214AA	1d	1q	Mde
EX	-	SS2060LHE	Si-diode	SBR, 60V, 2A, Vf<0.62V(2A)	SOD-123HE	7d	1a	Pjt
EX	-	STZ8150B	Zener diode	14.6..15.35V, Izt=5mA, Zzt=40Ω, 300mW	SOD-323	5d	1a	Jiy
EX	-	TV06B221JB-G	TVS	Vrwm=220.0V, Vbr=246.0..272.0V, Ipp=1.69A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EX	-	Z1SMA36	Zener diode	34..38V, Izt=10mA, Zzt=40Ω, 1W	DO-214AC	1d	1ab	Ttr
EX	-	Z1SMA36	Zener diode	36V±5%, Izt=10mA, 1.3W	DO-214AC	1d	2j	Fag
EXA	-	P6SMB22	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 20.0A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXB	-	P6SMB22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 20.0A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXC	-	P6SMB24	TVS	Vrwm=24V, Vbr=22.8..25.2V, 18.1A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXD	-	P6SMB24A	TVS	Vrwm=24V, Vbr=22.8..25.2V, 18.1A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXE	-	P6SMB27	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.0A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXF	-	P6SMB27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.0A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXG	-	P6SMB30	TVS	Vrwm=30V, Vbr=28.5..31.5V, 14.5A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXH	-	P6SMB30A	TVS	Vrwm=30V, Vbr=28.5..31.5V, 14.5A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXJ	-	1.5SMC39A	TVS	Vrwm=33.3V, Vbr=37.1..41V, Ipp=28A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
EXJ	-	P6SMB33	TVS	Vrwm=33V, Vbr=31.4..34.7V, 13.1A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXK	-	P6SMB33A	TVS	Vrwm=33V, Vbr=31.4..34.7V, 13.1A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXL	-	P6SMB36	TVS	Vrwm=36V, Vbr=34.2..37.8V, 12A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXM	-	P6SMB36A	TVS	Vrwm=36V, Vbr=34.2..37.8V, 12A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXN	-	P6SMB39	TVS	Vrwm=39V, Vbr=37.1..41V, 11.1A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXP	-	P6SMB39A	TVS	Vrwm=39V, Vbr=37.1..41V, 11.1A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXP	-	TPSMC39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 27.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EXQ	-	P6SMB43	TVS	Vrwm=43V, Vbr=40.9..45.2V, 10.1A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXR	-	P6SMB43A	TVS	Vrwm=43V, Vbr=40.9..45.2V, 10.1A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXS	-	P6SMB47	TVS	Vrwm=47V, Vbr=44.7..49.4V, 9.3A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXT	-	P6SMB47A	TVS	Vrwm=47V, Vbr=44.7..49.4V, 9.3A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXU	-	P6SMB51	TVS	Vrwm=51V, Vbr=48.5..53.6V, 8.6A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXV	-	P6SMB51A	TVS	Vrwm=51V, Vbr=48.5..53.6V, 8.6A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXW	-	P6SMB56	TVS	Vrwm=56V, Vbr=53.2..58.8V, 7.4A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXX	-	P6SMB56A	TVS	Vrwm=56V, Vbr=53.2..58.8V, 7.8A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXY	-	P6SMB62	TVS	Vrwm=62V, Vbr=58.9..65.1V, 7.1A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EXZ	-	P6SMB62A	TVS	Vrwm=62V, Vbr=58.9..65.1V, 7.1A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EY	-	BZT52B16WS	Zener diode	15.68..16.32V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
EY	-	KDZ3.0VVY	Zener diode	2.95..3.20V, Izt=5mA, Zzt=120Ω, 100mW	VSC	7d	1a	Kec
EY	-	MM3ZB16H	Zener diode	15.68..16.32V, Izt=5mA, Zzt=40Ω, 300mW	SOD-323	5d	1a	Zow
EY	-	P6SMBJ210C	TVS	Vrwm=210V, Vbr=231..296.1V, 1.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
EY	-	SS2040HE	Si-diode	SBR, 40V, 2A, Vf<0.50V(2A)	SOD-123HE	7d	1a	Pjt
EY	-	Z1SMA39	Zener diode	37..41V, Izt=10mA, Zzt=40Ω, 1W	DO-214AC	1d	1ab	Ttr
EY	-	Z1SMA39	Zener diode	39V±5%, Izt=10mA, 1.3W	DO-214AC	1d	2j	Fag
EYA	-	P6SMB68	TVS	Vrwm=68V, Vbr=64.6..71.4V, 6.5A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYB	-	P6SMB68A	TVS	Vrwm=68V, Vbr=64.6..71.4V, 6.5A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYC	-	P6SMB75	TVS	Vrwm=75V, Vbr=71.3..78.8V, 5.8A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYD	-	P6SMB75A	TVS	Vrwm=75V, Vbr=71.3..78.8V, 5.8A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYE	-	P6SMB82	TVS	Vrwm=82V, Vbr=77.9..86.1V, 5.3A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYF	-	P6SMB82A	TVS	Vrwm=82V, Vbr=77.9..86.1V, 5.3A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYG	-	P6SMB91	TVS	Vrwm=91V, Vbr=86.5..95.5V, 4.8A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYH	-	P6SMB91A	TVS	Vrwm=91V, Vbr=86.5..95.5V, 4.8A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYJ	-	1.5SMC43	TVS	Vrwm=34.8V, Vbr=38.7..47.3V, Ipp=24A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
EYK	-	P6SMB100	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYK	-	P6SMB100A	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYL	-	P6SMB110	TVS	Vrwm=110V, Vbr=105..116V, 3.9A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYM	-	P6SMB110A	TVS	Vrwm=110V, Vbr=105..116V, 3.9A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYN	-	P6SMB120	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYP	-	P6SMB120A	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYP	-	TPSMC43	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 24.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EYQ	-	P6SMB130	TVS	Vrwm=130V, Vbr=124..137V, 3.4A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYR	-	P6SMB130A	TVS	Vrwm=130V, Vbr=124..137V, 3.4A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYS	-	P6SMB150	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYT	-	P6SMB150A	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYU	-	P6SMB160	TVS	Vrwm=160V, Vbr=152..168V, 2.7A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYV	-	P6SMB160A	TVS	Vrwm=160V, Vbr=152..168V, 2.7A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYW	-	P6SMB170	TVS	Vrwm=170V, Vbr=162..179V, 2.6A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYX	-	P6SMB170A	TVS	Vrwm=170V, Vbr=162..179V, 2.6A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYY	-	P6SMB180	TVS	Vrwm=180V, Vbr=171 189V, 2.4A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EYZ	-	P6SMB180A	TVS	Vrwm=180V, Vbr=171 189V, 2.4A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZ	-	BZT52B18WS	Zener diode	17.64..18.36V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
EZ	-	BZT52B9V1S	Zener diode	8.92..9.28V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323FL	7d	1a	Tsc
EZ	-	MM3Z9V1B	Zener diode	8.92..9.28V, Zzt=14Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
EZ	-	MM3Z9V1BW	Zener diode	8.92..9.28V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323FL	7d	1a	Tac

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
EZ	-	MM3ZB18H	Zener diode	17.64..18.36V, Izt=5mA, Zzt=45Ω, 300mW	SOD-323	5d	1a	Zow
EZ	-	P6SMBJ200CA	TVS	Vrwm=200V, Vbr=180..220V, 1.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
EZ	-	P6SMBJ210CA	TVS	Vrwm=210V, Vbr=231..296.1V, 1.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
EZ	-	TCMM3Z9V1B	Zener diode	9.1V±2%, Izt=5mA, Zzt=14Ω, 200mW	SOD-323FL	7d	1a	Tac
EZ	-	TV06B251JB-G	TVS	Vrwm=250.0V, Vbr=279.0..309.0V, Ipp=1.48A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
EZ	-	Z1SMA43	Zener diode	40..46V, Izt=10mA, Zzt=45Ω, 1W	DO-214AC	1d	1ab	Ttr
EZ	-	Z1SMA43	Zener diode	43V±5%, Izt=10mA, 1.3W	DO-214AC	1d	2j	Fag
EZA	-	P6SMB6.8	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 57.1A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZB	-	P6SMB6.8A	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 57.1A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZC	-	P6SMB7.5	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 53.1A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZD	-	P6SMB7.5A	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 53.1A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZE	-	P6SMB8.2	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 49.6A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZF	-	P6SMB8.2A	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 49.6A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZG	-	P6SMB9.1	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 44.8A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZH	-	P6SMB9.1A	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 44.8A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZJ	-	1.5SMC43A	TVS	Vrwm=36.8V, Vbr=40.9..45.2V, Ipp=25.3A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
EZJ	-	P6SMB10	TVS	Vrwm=10V, Vbr=9.5..10.5V, 41.4A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZK	-	P6SMB10A	TVS	Vrwm=10V, Vbr=9.5..10.5V, 41.4A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZL	-	P6SMB11	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38.5A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZM	-	P6SMB11A	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38.5A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZN	-	P6SMB12	TVS	Vrwm=12V, Vbr=11.4..12.6V, 35.9A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZP	-	P6SMB12A	TVS	Vrwm=12V, Vbr=11.4..12.6V, 35.9A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZP	-	TPSMC43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 25.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
EZQ	-	P6SMB13	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZR	-	P6SMB13A	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZS	-	P6SMB15	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28.3A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZT	-	P6SMB15A	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28.3A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZU	-	P6SMB16	TVS	Vrwm=16V, Vbr=15.2..16.8V, 26.7A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZV	-	P6SMB16A	TVS	Vrwm=16V, Vbr=15.2..16.8V, 26.7A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZW	-	P6SMB18	TVS	Vrwm=18V, Vbr=17.1..18.9V, 23.8A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZX	-	P6SMB18A	TVS	Vrwm=18V, Vbr=17.1..18.9V, 23.8A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZY	-	P6SMB20	TVS	Vrwm=20V, Vbr=19..21.0V, 21.7A, 600W(1ms)	DO-214AA	1d	1u	Pjt
EZZ	-	P6SMB20A	TVS	Vrwm=20V, Vbr=19..21.0V, 21.7A, 600W(1ms)	DO-214AA	1d	1u	Pjt
F	-	1PS79SB10	Si-diode	SBD, U-Speed, 30V, 200mA, Vf<0.8V(100mA), <10pF	SOD-523	6d	1a	Phi
f	-	BAS70-02W	Si-diode	SBD, GP, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SCD-80	6d	1u	Inf
F	-	CDZ7.5B	Zener diode	7.5V±2.5%, Izt=40mA, 1W	VMN	7d	1s	Rhm
F	-	CH740S-40PT	Si-diode	SBD, 40V, 40mA, Vf<1V(2mA)	SOD-523	8d	1a	Chm
F	-	GBLC18I	TVS	Vrwm=18V, 1A, 350W(1ms), 0.6pF	SOD-323	5d	1a	Prt
F	-	HVU352	C-diode	VCO 15V, ..1GHz, 6/8pF(1V)	SOD-323	5d	1a	Ren
F	-	MAZF075	Zener diode	7..7.9V, Zzt=20Ω(5mA), 120mW	S-Mini	8d	1a	Pan
F	-	MAZN075	Zener diode	7..7.9V, Zzt=20Ω(5mA), 120mW	SSMini2	7d	1a	Pan
F	-	MAZS033	Zener diode	3.1..3.5V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
F	-	MM9D24V	Zener diode	22.80..25.20V, Izt=5mA, Zzt=70Ω, 200mW	SOD-923	7d	1a	Wtr
F	-	MM9D9V1	Zener diode	8.65..9.56V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	1n	Wtr
f	-	MMSZ5232BPT	Zener diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 225mW	SOD-523	6d	1a	Chm
F	-	NZ9F24VT	Zener diode	22.80..25.20V, Izt=5mA, Zzt=70Ω, 200mW	SOD-923	7d	1a	Ons
F	-	NZ9F5V1ST	Zener diode	4.989..5.2V, Izt=5mA, Zzt=80Ω, 200mW	SOD-923	7d	2m	Ons
F	-	NZ9F9V1T	Zener diode	8.65..9.56V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	1n	Ons
F	au	MMSZ5255BPT	Zener diode	29V±5%, Izt=4.5mA, Zzt=44Ω, 225mW	SOD-523	6d	1a	Chm
f.	-	MMSZ5232SPT	Zener diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 225mW	SOD-523	6d	1a	Chm
F.	au	MMSZ5255SPT	Zener diode	29V±5%, Izt=4.5mA, Zzt=44Ω, 225mW	SOD-523	6d	1a	Chm
F.0	-	MMSZ5240C-V-G	Zener diode	10V±2%, Izt=20mA, Zzt=17Ω, 500mW	SOD-123	5d	1kb	Vs
F.6	-	MMSZ5236C-V-G	Zener diode	7.5V±2%, Izt=20mA, Zzt=6Ω, 500mW	SOD-123	5d	1kb	Vs
F.7	-	MMSZ5237C-V-G	Zener diode	8.2V±2%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123	5d	1kb	Vs
F.8	-	MMSZ5238C-V-G	Zener diode	8.7V±2%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123	5d	1kb	Vs
F.9	-	MMSZ5239C-V-G	Zener diode	9.1V±2%, Izt=20mA, Zzt=10Ω, 500mW	SOD-123	5d	1kb	Vs
F^	-	MAZS0330H	Zener diode	3.25..3.5V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
F_	-	MAZS0330L	Zener diode	3.1..3.35V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
F0	-	BZD27C24P	Zener diode	22.8..25.6V, Zzt=7Ω, Izt=25mA, 1W	SOD-123FL	7d	2u	Tsc
F0	-	BZD27C24P	Zener diode	22.8..25.6V, Zzt=7Ω, Izt=25mA, 800mW	SOD-123FL	7d	1i	Vs
F0	-	BZX585-C5V6	Zener diode	5.6V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
F0	-	CMOZ5V6	Zener diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 250mW	SOD-523	6d	1a	Cen
F0	-	MMPZ5247BPT	Zener diode	16.15..17.85V, Izt=5mA, Zzt=36Ω, 225mW	SOD-323	5d	1a	Chm
F0	-	MMSZ5240B-V-G	Zener diode	10V±5%, Izt=20mA, Zzt=17Ω, 500mW	SOD-123	5d	1kb	Vs
F01	-	DFLS130-7	Si-diode	SBR, 30V, 1.1A, Vf=0.36V(1A), 1.67W	PowDI123	7d	1a	Di
F02	-	DFLS120L-7	Si-diode	SBR, 20V, 1A, Vf=0.32V(1A), 1.67W	PowDI123	7d	1a	Di
F04	-	DFLS140-7	Si-diode	SBR, 40V, 1.1A, Vf=0.45V(0.5A), 1.67W	PowDI123	7d	1a	Di
F05A	-	UMAF5.0A	TVS	Vrwm=5.0V, Vbr=6.40..9.2V, 54.3A, 500W(1ms)	UltraMite	14d	1v	Msc
F05CA	-	UMAF5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..9.2V, 54.3A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F065A	-	UMAF6.5A	TVS	Vrwm=6.5V, Vbr=7.22..11.2V, 44.7A, 500W(1ms)	UltraMite	14d	1v	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
F065CA	-	UMAF6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..11.2V, 44.7A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F06A	-	UMAF6.0A	TVS	Vrwm=6.0V, Vbr=6.67..10.3V, 48.5A, 500W(1ms)	UltraMite	14d	1v	Msc
F06CA	-	UMAF6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..10.3V, 48.5A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F075A	-	UMAF7.5A	TVS	Vrwm=7.5V, Vbr=8.33..12.9V, 38.8A, 500W(1ms)	UltraMite	14d	1v	Msc
F075CA	-	UMAF7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..12.9V, 38.8A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F07A	-	UMAF7.0A	TVS	Vrwm=7.0V, Vbr=7.78..12.0V, 41.7A, 500W(1ms)	UltraMite	14d	1v	Msc
F07CA	-	UMAF7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..12.0V, 41.7A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F085A	-	UMAF8.5A	TVS	Vrwm=8.5V, Vbr=9.44..14.4V, 34.7A, 500W(1ms)	UltraMite	14d	1v	Msc
F085CA	-	UMAF8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..14.4V, 34.7A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F08A	-	UMAF8.0A	TVS	Vrwm=8.0V, Vbr=8.89..13.6V, 36.7A, 500W(1ms)	UltraMite	14d	1v	Msc
F08CA	-	UMAF8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..13.6V, 36.7A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F09A	-	UMAF9.0A	TVS	Vrwm=9.0V, Vbr=10.0..15.4V, 32.6A, 500W(1ms)	UltraMite	14d	1v	Msc
F09CA	-	UMAF9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..15.4V, 32.6A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F1	-	BZD27C27P	Zener diode	25.1..28.9V, Zzt=7Ω, Izt=25mA, 1W	SOD-123FL	7d	2u	Tsc
F1	-	BZD27C27P	Zener diode	25.1..28.9V, Zzt=7Ω, Izt=25mA, 800mW	SOD-123FL	7d	1i	Vs
F1	-	BZX585-C2V4	Zener diode	2.4V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
F1	-	CMOZ2V4	Zener diode	2.28..2.52V, Izt=5mA, Zzt=100Ω, 250mW	SOD-523	6d	1a	Cen
F1	-	CZRH5236B-G	Zener diode	7.13..7.88V, Zzt=6Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
F1	-	CZRV5236B-G	Zener diode	7.13..7.88V, Zzt=6Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
F1	-	CZRW5236B-G	Zener diode	7.13..7.88V, Zzt=6Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
F1	-	FFM101-MH	Si-diode	Rectifier, Fast-Recovery, 50V, 1A, Vf<1.3V(1A), <150ns	SOD-123H	10d	1a	Frm
F1	-	FM101SPT	Si-diode	Rectifer, Fast, 50V, 1A	SOD-123S	7d	1a	Chm
F1	-	FRS1A	Si-diode	Rectifier, Fast-Recovery 50V, 1A, <250ns	DO-214AC	1d	2j	Fag
F1	-	FSM11PL	Si-diode	Rectifier, Fast Recovery, 50V, 1A, Vf<1.3V(1A), 250ns	SOD-123FL	7d	1a	Mco
F1	-	LMSZ5236BT1G	Zener diode	7.13..7.88V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
F1	-	MM3Z5228B	Zener diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 200mW	SOD-323FL	7d	1a	Bts
F1	-	MM3Z5228BH	Zener diode	3.71..4.1V, Izt=20mA, Zzt=23Ω, 300mW	SOD-323	5d	1a	Zow
F1	-	MM3Z5236B	Zener diode	7.13..7.88V, Izt=20mA, Zzt=6Ω, 200mW	SOD-323	5d	1a	Ext
F1	-	MMBZ5236BV	Zener diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 200mW	SOD-523	6d	1a	Pjt
F1	-	MMSZ5236B	Zener diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 500mW	SOD-123	5d	1d	Di
F1	-	MMSZ5236B-F	Zener diode	7.13..7.88V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr
F1	-	MMSZ5236BS	Zener diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 200mW	SOD-323	5d	1d	Di
F1	-	MMSZ5236BWS	Zener diode	7.13..7.88V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
F1	-	OYD7V5T1	Zener diode	7...7.9V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Ouy
F1	ag	MMSZ5236B	Zener diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 500mW	SOD-123	5d	1d	Di
F100A	-	UMAF100A	TVS	Vrwm=100V, Vbr=111..162V, 3.1A, 500W(1ms)	UltraMite	14d	1v	Msc
F100CA	-	UMAF100CA	TVS	Vrwm=100V, Vbr=111..162V, 3.1A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F10A	-	UMAF10A	TVS	Vrwm=10V, Vbr=11.1..17.0V, 29.4A, 500W(1ms)	UltraMite	14d	1v	Msc
F10CA	-	UMAF10CA	TVS	Vrwm=10V, Vbr=11.1..17.0V, 29.4A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F110A	-	UMAF110A	TVS	Vrwm=110V, Vbr=122..177V, 2.8A, 500W(1ms)	UltraMite	14d	1v	Msc
F110CA	-	UMAF110CA	TVS	Vrwm=110V, Vbr=122..177V, 2.8A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F11A	-	UMAF11A	TVS	Vrwm=11V, Vbr=12.2..18.2V, 27.4A, 500W(1ms)	UltraMite	14d	1v	Msc
F11CA	-	UMAF11CA	TVS	Vrwm=11V, Vbr=12.2..18.2V, 27.4A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F12	-	STPS120MF	Si-diode	SBR, 20V, 1A, Vf<0.55V(1A)	DO-220AA	8d	1a	Ste
F120A	-	UMAF120A	TVS	Vrwm=120V, Vbr=133..193V, 2.6A, 500W(1ms)	UltraMite	14d	1v	Msc
F120CA	-	UMAF120CA	TVS	Vrwm=120V, Vbr=133..193V, 2.6A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F12A	-	UMAF12A	TVS	Vrwm=12V, Vbr=13.3..19.9V, 25.1A, 500W(1ms)	UltraMite	14d	1v	Msc
F12CA	-	UMAF12CA	TVS	Vrwm=12V, Vbr=13.3..19.9V, 25.1A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F130A	-	UMAF130A	TVS	Vrwm=130V, Vbr=144..209V, 2.4A, 500W(1ms)	UltraMite	14d	1v	Msc
F130CA	-	UMAF130CA	TVS	Vrwm=130V, Vbr=144..209V, 2.4A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F13A	-	UMAF13A	TVS	Vrwm=13V, Vbr=14.4..21.5V, 23.2A, 500W(1ms)	UltraMite	14d	1v	Msc
F13CA	-	UMAF13CA	TVS	Vrwm=13V, Vbr=14.4..21.5V, 23.2A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F14A	-	UMAF14A	TVS	Vrwm=14V, Vbr=15.6..23.2V, 21.5A, 500W(1ms)	UltraMite	14d	1v	Msc
F14CA	-	UMAF14CA	TVS	Vrwm=14V, Vbr=15.6..23.2V, 21.5A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F150A	-	UMAF150A	TVS	Vrwm=150V, Vbr=167..243V, 2.1A, 500W(1ms)	UltraMite	14d	1v	Msc
F150CA	-	UMAF150CA	TVS	Vrwm=150V, Vbr=167..243V, 2.1A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F157	-	FSM157PT	Si-diode	Rectifer, Fast, 400V, 1A	DO-214AC	1d	1a	Chm
F158	-	FSM158PT	Si-diode	Rectifer, Fast, 600V, 1A	DO-214AC	1d	1a	Chm
F159	-	FSM159PT	Si-diode	Rectifer, Fast, 1000V, 1A	DO-214AC	1d	1a	Chm
F15A	-	UMAF15A	TVS	Vrwm=15V, Vbr=16.7..24.4V, 20.6A, 500W(1ms)	UltraMite	14d	1v	Msc
F15CA	-	UMAF15CA	TVS	Vrwm=15V, Vbr=16.7..24.4V, 20.6A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F160A	-	UMAF160A	TVS	Vrwm=160V, Vbr=178..259V, 1.9A, 500W(1ms)	UltraMite	14d	1v	Msc
F160CA	-	UMAF160CA	TVS	Vrwm=160V, Vbr=178..259V, 1.9A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F16A	-	UMAF16A	TVS	Vrwm=16V, Vbr=17.8..26.0V, 19.2A, 500W(1ms)	UltraMite	14d	1v	Msc
F16CA	-	UMAF16CA	TVS	Vrwm=16V, Vbr=17.8..26.0V, 19.2A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F170A	-	UMAF170A	TVS	Vrwm=170V, Vbr=189..275V, 1.8A, 500W(1ms)	UltraMite	14d	1v	Msc
F170CA	-	UMAF170CA	TVS	Vrwm=170V, Vbr=189..275V, 1.8A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F17A	-	UMAF17A	TVS	Vrwm=17V, Vbr=18.9..27.6V, 18.1A, 500W(1ms)	UltraMite	14d	1v	Msc
F17CA	-	UMAF17CA	TVS	Vrwm=17V, Vbr=18.9..27.6V, 18.1A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F18A	-	UMAF18A	TVS	Vrwm=18V, Vbr=20.0..29.2V, 17.2A, 500W(1ms)	UltraMite	14d	1v	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
F18CA	-	UMAF18CA	TVS	Vrwm=18V, Vbr=20.0..29.2V, 17.2A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F1A	-	CD214A-F150	Si-diode	Rect, Fast, 50V, 1A, Vf<0.95V(1A)	DO-214AC	1d	1a	Brn
F1A	-	CMOZ2V6	Zener diode	2.47..2.73V, Izt=5mA, Zzt=100Ω, 250mW	SOD-523	6d	1a	Cen
F1B	-	CD214A-F1100	Si-diode	Rect, Fast, 100V, 1A, Vf<0.95V(1A)	DO-214AC	1d	1a	Brn
F1C	-	CD214A-F1150	Si-diode	Rect, Fast, 150V, 1A, Vf<0.95V(1A)	DO-214AC	1d	1a	Brn
F1D	-	CD214A-F1200	Si-diode	Rect, Fast, 200V, 1A, Vf<0.95V(1A)	DO-214AC	1d	1a	Brn
F1G	-	CD214A-F1400	Si-diode	Rect, Fast, 400V, 1A, Vf<1.25V(1A)	DO-214AC	1d	1a	Brn
F1J	-	CD214A-F1600	Si-diode	Rect, Fast, 600V, 1A, Vf<1.7V(1A)	DO-214AC	1d	1a	Brn
F1L2	-	STPS1L20MF	Si-diode	SBR, 20V, 1A, Vf<0.37V(1A)	DO-220AA	8d	1a	Ste
F1L4	-	STPS1L140MF	Si-diode	SBR, 40V, 1A, Vf<0.42V(1A)	DO-220AA	8d	1a	Ste
F1L6	-	STPS1L60MF	Si-diode	SBR, 60V, 1A, Vf<0.56V(1A)	DO-220AA	8d	1a	Ste
F2	-	BZD27C30P	Zener diode	28..32V, Zzt=15Ω, Izt=25mA, 800mW	SOD-123FL	7d	1i	Vs
F2	-	BZD27C30P	Zener diode	28..32V, Zzt=8Ω, Izt=25mA, 1W	SOD-123FL	7d	2u	Tsc
F2	-	BZX585-C2V9	Zener diode	2.9V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
F2	-	CMOZ2V7	Zener diode	2.57..2.84V, Izt=5mA, Zzt=100Ω, 250mW	SOD-523	6d	1a	Cen
F2	-	CZRH5237B-G	Zener diode	7.79..8.61V, Zzt=8Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
F2	-	CZRV5237B-G	Zener diode	7.79..8.61V, Zzt=8Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
F2	-	CZRW5237B-G	Zener diode	7.79..8.61V, Zzt=8Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
F2	-	EDZ6.8B	Zener diode	6.65..6.93V, Izt=5mA, Zzt=40Ω, 150mW	SOD-523	6d	1a	Rhm
F2	-	EDZV6.8B	Zener diode	6.65..6.93V, Izt=5.0mA, Zzt=40Ω, 150mW	SOD-523	6d	2v	Rhm
F2	-	FDZ6.8EV	Zener diode	6.650..6.930V, Izt=5mA, Zzt=40Ω, 150mW	SOD-523	6d	1a	Fis
F2	-	FDZ6.8VT	Zener diode	6.650..6.930V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Fis
F2	-	FFM102-MH	Si-diode	Rectifier, Fast-Recovery, 100V, 1A, Vf<1.3V(1A), <150ns	SOD-123H	10d	1a	Frm
F2	-	FM102SPT	Si-diode	Rectifer, Fast, 100V, 1A	SOD-123S	7d	1a	Chm
F2	-	FRS1B	Si-diode	Rectifier, Fast-Recovery 100V, 1A, <250ns	DO-214AC	1d	2j	Fag
F2	-	FSM12PL	Si-diode	Rectifier, Fast Recovery, 100V, 1A, Vf<1.3V(1A), 250ns	SOD-123FL	7d	1a	Mco
F2	-	LBZT52B6V8T1G	Zener diode	6.65..6.93V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
F2	-	LEDZ6.8BT1G	Zener diode	6.65..6.93V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
F2	-	LMSZ5237BT1G	Zener diode	7.79..8.61V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
F2	-	LUDZS6.8BT1G	Zener diode	6.65..6.93V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
F2	-	MM3Z5237B	Zener diode	7.79..8.61V, Izt=20mA, Zzt=8Ω, 200mW	SOD-323	5d	1a	Ext
F2	-	MM3Z5248B	Zener diode	18V±5%, Izt=7.0mA, Zzt=21Ω, 200mW	SOD-323FL	7d	1a	Bts
F2	-	MM3Z5248BH	Zener diode	17.1..18.9V, Izt=7mA, Zzt=21Ω, 300mW	SOD-323	5d	1a	Zow
F2	-	MMBZ5237BV	Zener diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOD-523	6d	1a	Pjt
F2	-	MMSZ5237B	Zener diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123	5d	1d	Di
F2	-	MMSZ5237B-F	Zener diode	7.79..8.61V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr
F2	-	MMSZ5237BS	Zener diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOD-323	5d	1d	Di
F2	-	MMSZ5237BWS	Zener diode	7.79..8.61V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
F2	-	MSCD012	Si-diode	SBR, 20V, 0.1A, Vf<0.45V(0.1A)	0805	14d	1v	Zow
F2	-	OYD8V2T1	Zener diode	7.7...8.7V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Ouy
F2	-	TDZ6.8B	Zener diode	6.8V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
F2	-	UDZS6.8B	Zener diode	6.65..6.93V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Wtr
F2	-	UDZS6.8B	Zener diode	6.8V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
F2	-	UDZV6.8B	Zener diode	6.65..6.93V, Izt=5.0mA, Zzt=40Ω, 200mW	SOD-323	5d	2v	Rhm
F2	-	VDZS6.8B	Zener diode	6.8V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
F2	ag	MMSZ5237B	Zener diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123	5d	1d	Di
F20A	-	UMAF20A	TVS	Vrwm=20V, Vbr=22.2..32.4V, 15.4A, 500W(1ms)	UltraMite	14d	1v	Msc
F20CA	-	UMAF20CA	TVS	Vrwm=20V, Vbr=22.2..32.4V, 15.4A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F22A	-	UMAF22A	TVS	Vrwm=22V, Vbr=24.4..35.5V, 14.1A, 500W(1ms)	UltraMite	14d	1v	Msc
F22CA	-	UMAF22CA	TVS	Vrwm=22V, Vbr=24.4..35.5V, 14.1A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F24A	-	UMAF24A	TVS	Vrwm=24V, Vbr=26.7..38.9V, 12.8A, 500W(1ms)	UltraMite	14d	1v	Msc
F24CA	-	UMAF24CA	TVS	Vrwm=24V, Vbr=26.7..38.9V, 12.8A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F26A	-	UMAF26A	TVS	Vrwm=26V, Vbr=28.9..42.1V, 11.9A, 500W(1ms)	UltraMite	14d	1v	Msc
F26CA	-	UMAF26CA	TVS	Vrwm=26V, Vbr=28.9..42.1V, 11.9A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F28A	-	UMAF28A	TVS	Vrwm=28V, Vbr=31.1..45.4V, 11.0A, 500W(1ms)	UltraMite	14d	1v	Msc
F28CA	-	UMAF28CA	TVS	Vrwm=28V, Vbr=31.1..45.4V, 11.0A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F3	-	BZD27C33P	Zener diode	31..35V, Zzt=15Ω, Izt=25mA, 800mW	SOD-123FL	7d	1i	Vs
F3	-	BZD27C33P	Zener diode	31..35V, Zzt=8Ω, Izt=25mA, 1W	SOD-123FL	7d	2u	Tsc
F3	-	BZX585-C3V0	Zener diode	3.0V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
F3	-	CMOZ3V0	Zener diode	2.85..3.15V, Izt=5mA, Zzt=95Ω, 250mW	SOD-523	6d	1a	Cen
F3	-	CZRW5238B-G	Zener diode	8.27..9.14V, Zzt=8Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
F3	-	FFM103-MH	Si-diode	Rectifier, Fast-Recovery, 200V, 1A, Vf<1.3V(1A), <150ns	SOD-123H	10d	1a	Frm
F3	-	FM103SPT	Si-diode	Rectifer, Fast, 200V, 1A	SOD-123S	7d	1a	Chm
F3	-	FRS1D	Si-diode	Rectifier, Fast-Recovery 200V, 1A, <250ns	DO-214AC	1d	2j	Fag
F3	-	FSM13PL	Si-diode	Rectifier, Fast Recovery, 200V, 1A, Vf<1.3V(1A), 250ns	SOD-123FL	7d	1a	Mco
F3	-	LMSZ5238BT1G	Zener diode	8.27..9.14V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
F3	-	MM3Z5268B	Zener diode	82V±5%, Izt=1.5mA, Zzt=330Ω, 200mW	SOD-323FL	7d	1a	Bts
F3	-	MMBZ5238BV	Zener diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOD-523	6d	1a	Pjt
F3	-	MMSZ5238B	Zener diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123	5d	1d	Di
F3	-	MMSZ5238B-F	Zener diode	8.27..9.14V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
F3	-	MMSZ5238BS	Zener diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOD-323	5d	1d	Di
F3	-	MMSZ5238BWS	Zener diode	8.27..9.14V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
F3	-	PZU2.7B1	Zener diode	2.5..2.75V, Zzt=100Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
F3	-	RKZ6.8B2KK	Zener diode	6.65..6.93V, Izt=5mA, Zzt=30Ω, 150mW	SFP	7d	1a	Ren
F3	-	RKZ6.8B2KL	Zener diode	6.65..6.93V, Izt=5mA, Zzt=30Ω, 100mW	EFP	7d	1a	Ren
F3	ag	MMSZ5238B	Zener diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123	5d	1d	Di
F30A	-	UMAF30A	TVS	Vrwm=30V, Vbr=33.3..48.4V, 10.3A, 500W(1ms)	UltraMite	14d	1v	Msc
F30CA	-	UMAF30CA	TVS	Vrwm=30V, Vbr=33.3..48.4V, 10.3A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F33A	-	UMAF33A	TVS	Vrwm=33V, Vbr=36.7..53.3V, 9.4A, 500W(1ms)	UltraMite	14d	1v	Msc
F33CA	-	UMAF33CA	TVS	Vrwm=33V, Vbr=36.7..53.3V, 9.4A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F36A	-	UMAF36A	TVS	Vrwm=36V, Vbr=40.0..58.1V, 8.6A, 500W(1ms)	UltraMite	14d	1v	Msc
F36CA	-	UMAF36CA	TVS	Vrwm=36V, Vbr=40.0..58.1V, 8.6A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F3A	-	CD214B-F350	Si-diode	Rect, Fast, 50V, 3A, Vf<0.95V(1A)	DO-214AA	1d	1a	Brn
F3A	-	CD214C-F350	Si-diode	Rect, Fast, 50V, 3A, Vf<0.92V(1A)	DO-214AB	1d	1a	Brn
F3B	-	CD214B-F3100	Si-diode	Rect, Fast, 100V, 3A, Vf<0.95V(1A)	DO-214AA	1d	1a	Brn
F3B	-	CD214C-F3100	Si-diode	Rect, Fast, 100V, 3A, Vf<0.92V(1A)	DO-214AB	1d	1a	Brn
F3C	-	CD214B-F3150	Si-diode	Rect, Fast, 150V, 3A, Vf<0.95V(1A)	DO-214AA	1d	1a	Brn
F3D	-	CD214B-F3200	Si-diode	Rect, Fast, 200V, 3A, Vf<0.95V(1A)	DO-214AA	1d	1a	Brn
F3D	-	CD214C-F3200	Si-diode	Rect, Fast, 200V, 3A, Vf<0.92V(1A)	DO-214AB	1d	1a	Brn
F3G	-	CD214B-F3400	Si-diode	Rect, Fast, 400V, 3A, Vf<1.25V(1A)	DO-214AA	1d	1a	Brn
F3G	-	CD214C-F3400	Si-diode	Rect, Fast, 400V, 3A, Vf<1.25V(1A)	DO-214AB	1d	1a	Brn
F3J	-	CD214B-F3600	Si-diode	Rect, Fast, 600V, 3A, Vf<1.7V(1A)	DO-214AA	1d	1a	Brn
F3J	-	CD214C-F3600	Si-diode	Rect, Fast, 600V, 3A, Vf<1.3V(1A)	DO-214AB	1d	1a	Brn
F4	-	BZD27C36P	Zener diode	34..38V, Zzt=21Ω, Izt=10mA, 1W	SOD-123FL	7d	2u	Tsc
F4	-	BZD27C36P	Zener diode	34..38V, Zzt=21Ω, Izt=10mA, 800mW	SOD-123FL	7d	1i	Vs
F4	-	BZX585-C3V3	Zener diode	3.3V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
F4	-	CMOZ3V3	Zener diode	3.14..3.47V, Izt=5.0V, Zzt=95Ω, 250mW	SOD-523	6d	1a	Cen
F4	-	CZRH5239B-G	Zener diode	8.65..9.56V, Zzt=10Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
F4	-	CZRV5239B-G	Zener diode	8.65..9.56V, Zzt=10Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
F4	-	CZRW5239B-G	Zener diode	8.65..9.56V, Zzt=10Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
F4	-	FFM104-MH	Si-diode	Rectifier, Fast-Recovery, 400V, 1A, Vf<1.3V(1A), <150ns	SOD-123H	10d	1a	Frm
F4	-	FM104SPT	Si-diode	Rectifer, Fast, 400V, 1A	SOD-123S	7d	1a	Chm
F4	-	FRS1G	Si-diode	Rectifier, Fast-Recovery 400V, 1A, <250ns	DO-214AC	1d	2j	Fag
F4	-	FSM14PL	Si-diode	Rectifier, Fast Recovery, 400V, 1A, Vf<1.3V(1A), 250ns	SOD-123FL	7d	1a	Mco
F4	-	LMSZ5239BT1G	Zener diode	8.65..9.56V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
F4	-	MM1Z5228B	Zener diode	3.71...10V, Izt=20mA, Zzt=23Ω, 500mW	SOD-323FL	7d	1a	Eic
F4	-	MM1Z5228BH	Zener diode	3.71..4.1V, Izt=20mA, Zzt=23Ω, 500mW	SOD-123	5d	1a	Zow
F4	-	MM3Z6239B	Zener diode	8.65..9.56V, Izt=20mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Ext
F4	-	MMBZ5239BV	Zener diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 200mW	SOD-523	6d	1a	Pjt
F4	-	MMSZ5228B	Zener diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 500mW	SOD-123	5d	1a	Eic
F4	-	MMSZ5239B	Zener diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 500mW	SOD-123	5d	1d	Di
F4	-	MMSZ5239B-F	Zener diode	8.65..9.56V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr
F4	-	MMSZ5239BS	Zener diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 200mW	SOD-323	5d	1d	Di
F4	-	MMSZ5239BWS	Zener diode	8.65..9.56V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
F4	-	MSCD014	Si-diode	SBR, 40V, 0.1A, Vf<0.5V(0.1A)	0805	14d	1v	Zow
F4	-	OYD9V1T1	Zener diode	8.5...9.6V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Ouy
F4	-	PZU3.0B1	Zener diode	2.8..3.05V, Zzt=95Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
F4	ag	MMSZ5239B	Zener diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 500mW	SOD-123	5d	1d	Di
F40A	-	UMAF40A	TVS	Vrwm=40V, Vbr=44.4..64.5V, 7.8A, 500W(1ms)	UltraMite	14d	1v	Msc
F40CA	-	UMAF40CA	TVS	Vrwm=40V, Vbr=44.4..64.5V, 7.8A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F43A	-	UMAF43A	TVS	Vrwm=43V, Vbr=47.8..69.4V, 7.2A, 500W(1ms)	UltraMite	14d	1v	Msc
F43CA	-	UMAF43CA	TVS	Vrwm=43V, Vbr=47.8..69.4V, 7.2A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F45A	-	UMAF45A	TVS	Vrwm=45V, Vbr=50.0..72.7V, 6.9A, 500W(1ms)	UltraMite	14d	1v	Msc
F45CA	-	UMAF45CA	TVS	Vrwm=45V, Vbr=50.0..72.7V, 6.9A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F48A	-	UMAF48A	TVS	Vrwm=48V, Vbr=53.3..77.4V, 6.5A, 500W(1ms)	UltraMite	14d	1v	Msc
F48CA	-	UMAF48CA	TVS	Vrwm=48V, Vbr=53.3..77.4V, 6.5A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F5	-	BZD27C39P	Zener diode	37..41V, Zzt=21Ω, Izt=10mA, 1W	SOD-123FL	7d	2u	Tsc
F5	-	BZD27C39P	Zener diode	37..41V, Zzt=21Ω, Izt=10mA, 800mW	SOD-123FL	7d	1i	Vs
F5	-	BZX584B10V	Zener diode	9.80..10.20V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523FL	7d	1a	Tac
F5	-	BZX585-C3V6	Zener diode	3.6V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
F5	-	CMOZ3V6	Zener diode	3.42..3.78V, Izt= 5.0mA, Zzt=90Ω, 250mW	SOD-523	6d	1a	Cen
F5	-	CZRH5240B-G	Zener diode	9.5..10.5V, Zzt=17Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
F5	-	CZRV5240B-G	Zener diode	9.5..10.5V, Zzt=17Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
F5	-	CZRW5240B-G	Zener diode	9.50..10.50V, Zzt=17Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
F5	-	EDZ36B	Zener diode	35.07..36.87V, Izt=2mA, Zzt=300Ω, 150mW	SOD-523	6d	1a	Rhm
F5	-	EDZV36B	Zener diode	35.07..36.87V, Izt=2.0mA, Zzt=300Ω, 150mW	SOD-523	6d	2v	Rhm
F5	-	FDZ36EV	Zener diode	35.070..36.870V, Izt=2mA, Zzt=300Ω, 150mW	SOD-523	6d	1a	Fis
F5	-	FDZ36VT	Zener diode	35.070..36.870V, Izt=5mA, Zzt=300Ω, 200mW	SOD-323	5d	1a	Fis
F5	-	FFM105-MH	Si-diode	Rectifier, Fast-Recovery, 600V, 1A, Vf<1.3V(1A), <250ns	SOD-123H	10d	1a	Frm
F5	-	FM105SPT	Si-diode	Rectifer, Fast, 600V, 1A	SOD-123S	7d	1a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
F5	-	FRS1J	Si-diode	Rectifier, Fast-Recovery 600V, 1A, <250ns	DO-214AC	1d	2j	Fag
F5	-	FSM15PL	Si-diode	Rectifier, Fast Recovery, 600V, 1A, Vf<1.3V(1A), 500ns	SOD-123FL	7d	1a	Mco
F5	-	LBZT52B36T1G	Zener diode	35.07..36.87V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
F5	-	LEDZ36BT1G	Zener diode	35.07..36.87V, Izt=2mA, 150mW	SOD-523	6d	1g	Lrc
F5	-	LMSZ5240BT1G	Zener diode	9.5..10.5V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
F5	-	LUDZS36BT1G	Zener diode	35.07..36.87V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
F5	-	MM1Z5248B	Zener diode	17.10..18.90V, Izt=7.0mA, Zzt=21Ω, 500mW	SOD-323FL	7d	1a	Eic
F5	-	MM1Z5248BH	Zener diode	17.1..18.9V, Izt=7mA, Zzt=21Ω, 500mW	SOD-123	5d	1a	Zow
F5	-	MM3Z5240B	Zener diode	9.50..10.50V, Izt=20mA, Zzt=17Ω, 200mW	SOD-323	5d	1a	Ext
F5	-	MM5Z10VB	Zener diode	9.80..10.20V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523FL	7d	1a	Tac
F5	-	MMBZ5240BV	Zener diode	10V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOD-523	6d	1a	Pjt
F5	-	MMSZ5240B	Zener diode	10V±5%, Izt=20mA, Zzt=17Ω, 500mW	SOD-123	5d	1d	Di
F5	-	MMSZ5240B-F	Zener diode	9.50..10.50V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr
F5	-	MMSZ5240BS	Zener diode	10V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOD-323	5d	1d	Di
F5	-	MMSZ5240BWS	Zener diode	9.50..10.50V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
F5	-	MMSZ5248B	Zener diode	18V±5%, Izt=7mA, Zzt=21Ω, 500mW	SOD-123	5d	1a	Eic
F5	-	OYD10VT1	Zener diode	9.4...10.6V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Ouy
F5	-	PZU3.3B1	Zener diode	3.1..3.35V, Zzt=95Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
F5	-	UDZS36B	Zener diode	35.07..36.87V, Izt=5mA, Zzt=300Ω, 200mW	SOD-323	5d	1a	Wtr
F5	-	UDZS36B	Zener diode	36V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
F5	-	UDZV36B	Zener diode	35.07..36.87V, Izt=5.0mA, Zzt=300Ω, 200mW	SOD-323	5d	2v	Rhm
F5	-	VDZS36B	Zener diode	36V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
F5	ag	MMSZ5240B	Zener diode	10V±5%, Izt=20mA, Zzt=17Ω, 500mW	SOD-123	5d	1d	Di
F51A	-	UMAF51A	TVS	Vrwm=51V, Vbr=56.7..82.4V, 6.1A, 500W(1ms)	UltraMite	14d	1v	Msc
F51CA	-	UMAF51CA	TVS	Vrwm=51V, Vbr=56.7..82.4V, 6.1A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F54A	-	UMAF54A	TVS	Vrwm=54V, Vbr=60.0..87.1V, 5.7A, 500W(1ms)	UltraMite	14d	1v	Msc
F54CA	-	UMAF54CA	TVS	Vrwm=54V, Vbr=60.0..87.1V, 5.7A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F58A	-	UMAF58A	TVS	Vrwm=58V, Vbr=64.4..93.6V, 5.3A, 500W(1ms)	UltraMite	14d	1v	Msc
F58CA	-	UMAF58CA	TVS	Vrwm=58V, Vbr=64.4..93.6V, 5.3A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F6	-	BZD27C43P	Zener diode	40..46V, Zzt=24Ω, Izt=10mA, 1W	SOD-123FL	7d	2u	Tsc
F6	-	BZD27C43P	Zener diode	40..46V, Zzt=24Ω, Izt=10mA, 800mW	SOD-123FL	7d	1i	Vs
F6	-	BZX585-C3V9	Zener diode	3.9V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
F6	-	CMOZ3V9	Zener diode	3.71..4.10V, Izt=5mA, Zzt=90Ω, 250mW	SOD-523	6d	1a	Cen
F6	-	FFM106-MH	Si-diode	Rectifier, Fast-Recovery, 800V, 1A, Vf<1.3V(1A), <500ns	SOD-123H	10d	1a	Frm
F6	-	FM106SPT	Si-diode	Rectifer, Fast, 800V, 1A	SOD-123S	7d	1a	Chm
F6	-	FRS1K	Si-diode	Rectifier, Fast-Recovery 800V, 1A, <250ns	DO-214AC	1d	2j	Fag
F6	-	FSM16PL	Si-diode	Rectifier, Fast Recovery, 800V, 1A, Vf<1.3V(1A), 500ns	SOD-123FL	7d	1a	Mco
F6	-	MM1Z5268B	Zener diode	82V±5%, Izt=1.5mA, Zzt=330Ω, 500mW	SOD-123FL	7d	1a	Bts
F6	-	MMSZ5236B-V-G	Zener diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 500mW	SOD-123	5d	1kb	Vs
F6	-	MMSZ5268B	Zener diode	82V±5%, Izt=1.5mA, Zzt=330Ω, 500mW	SOD-123	5d	1a	Eic
F6	-	PZU3.6B1	Zener diode	3.4..3.65V, Zzt=90Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
F6	-	RKZ7.5B2KK	Zener diode	7.28..7.60V, Izt=5mA, Zzt=30Ω, 150mW	SFP	7d	1a	Ren
F6	-	RKZ7.5B2KL	Zener diode	7.28..7.60V, Izt=5mA, Zzt=30Ω, 100mW	EFP	7d	1a	Ren
F60A	-	UMAF60A	TVS	Vrwm=60V, Vbr=66.7..96.8V, 5.2A, 500W(1ms)	UltraMite	14d	1v	Msc
F60CA	-	UMAF60CA	TVS	Vrwm=60V, Vbr=66.7..96.8V, 5.2A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F64A	-	UMAF64A	TVS	Vrwm=64V, Vbr=71.1..103.0V, 4.9A, 500W(1ms)	UltraMite	14d	1v	Msc
F64CA	-	UMAF64CA	TVS	Vrwm=64V, Vbr=71.1..103.0V, 4.9A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F7	-	BZD27C47P	Zener diode	44..50V, Zzt=24Ω, Izt=10mA, 1W	SOD-123FL	7d	2u	Tsc
F7	-	BZD27C47P	Zener diode	44..50V, Zzt=24Ω, Izt=10mA, 800mW	SOD-123FL	7d	1i	Vs
F7	-	BZX585-C4V3	Zener diode	4.3V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
F7	-	CMOZ4V3	Zener diode	4.09..4.52V, Izt=5mA, Zzt=90Ω, 250mW	SOD-523	6d	1a	Cen
F7	-	FFM107-MH	Si-diode	Rectifier, Fast-Recovery, 1000V, 1A, Vf<1.3V(1A), <500ns	SOD-123H	10d	1a	Frm
F7	-	FM107SPT	Si-diode	Rectifer, Fast, 1000V, 1A	SOD-123S	7d	1a	Chm
F7	-	FRS1M	Si-diode	Rectifier, Fast-Recovery 1000V, 1A, <250ns	DO-214AC	1d	2j	Fag
F7	-	FSM17PL	Si-diode	Rectifier, Fast Recovery, 1000V, 1A, Vf<1.3V(1A), 500ns	SOD-123FL	7d	1a	Mco
F7	-	MMSZ5237B-V-G	Zener diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123	5d	1kb	Vs
F7	-	PZU3.9B1	Zener diode	3.7..3.97V, Zzt=90Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
F70A	-	UMAF70A	TVS	Vrwm=70V, Vbr=77.8..113V, 4.4A, 500W(1ms)	UltraMite	14d	1v	Msc
F70CA	-	UMAF70CA	TVS	Vrwm=70V, Vbr=77.8..113V, 4.4A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F75A	-	UMAF75A	TVS	Vrwm=75V, Vbr=83.3..121V, 4.1A, 500W(1ms)	UltraMite	14d	1v	Msc
F75CA	-	UMAF75CA	TVS	Vrwm=75V, Vbr=83.3..121V, 4.1A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F78A	-	UMAF78A	TVS	Vrwm=78V, Vbr=86.7..126V, 4.0A, 500W(1ms)	UltraMite	14d	1v	Msc
F78CA	-	UMAF78CA	TVS	Vrwm=78V, Vbr=86.7..126V, 4.0A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F8	-	BZD27C51P	Zener diode	48..54V, Zzt=25Ω, Izt=10mA, 1W	SOD-123FL	7d	2u	Tsc
F8	-	BZD27C51P	Zener diode	48..54V, Zzt=25Ω, Izt=10mA, 800mW	SOD-123FL	7d	1i	Vs
F8	-	BZT52C4V3WT	Zener diode	4.09..4.52V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Ttr
F8	-	BZX585-C4V7	Zener diode	4.7V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
F8	-	CMOZ4V7	Zener diode	4.47..4.94V, Izt=5mA, Zzt=80Ω, 250mW	SOD-523	6d	1a	Cen
F8	-	MM5Z4V3	Zener diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Eic
F8	-	MM5Z4V3H	Zener diode	4..4.6V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Zow



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
F8	-	MMSZ5238B-V-G	Zener diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123	5d	1kb	Vs
F8	-	PZU4.3B1	Zener diode	4.01..4.21V, Zzt=90Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
F85A	-	UMAF85A	TVS	Vrwm=85V, Vbr=94.4..137V, 3.6A, 500W(1ms)	UltraMite	14d	1v	Msc
F85CA	-	UMAF85CA	TVS	Vrwm=85V, Vbr=94.4..137V, 3.6A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
F9	-	BZD27C56P	Zener diode	52..60V, Zzt=25Ω, Izt=10mA, 800mW	SOD-123FL	7d	1i	Vs
F9	-	BZT52C51WT	Zener diode	48.45..53.55V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	6d	1a	Ttr
F9	-	BZX585-C5V1	Zener diode	5.1V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
F9	-	CMOZ5V1	Zener diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 250mW	SOD-523	6d	1a	Cen
F9	-	MM5Z51H	Zener diode	48..54V, Izt=1mA, Zzt=180Ω, 200mW	SOD-523	6d	1a	Zow
F9	-	MM5Z51V	Zener diode	51V±5%, Izt=2mA, Zzt=180Ω, 200mW	SOD-523	6d	1a	Eic
F9	-	MMSZ5239B-V-G	Zener diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 500mW	SOD-123	5d	1kb	Vs
F9	-	PZU4.7B1	Zener diode	4.42..4.61V, Zzt=80Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
F9	-	RKZ8.2B2KK	Zener diode	8.02..8.36V, Izt=5mA, Zzt=30Ω, 150mW	SFP	7d	1a	Ren
F9	-	RKZ8.2B2KL	Zener diode	8.02..8.36V, Izt=5mA, Zzt=30Ω, 100mW	EFP	7d	1a	Ren
F90A	-	UMAF90A	TVS	Vrwm=90V, Vbr=100..146V, 3.4A, 500W(1ms)	UltraMite	14d	1v	Msc
F90CA	-	UMAF90CA	TVS	Vrwm=90V, Vbr=100..146V, 3.4A, 500W(1ms), Bidir.	UltraMite	14ba	1v	Msc
FA	-	BZT52B20WS	Zener diode	19.60..20.40V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
FA	-	MM3ZB20H	Zener diode	19.6..20.4V, Izt=5mA, Zzt=50Ω, 300mW	SOD-323	5d	1a	Zow
FA	-	PZU5.1B1	Zener diode	4.84..5.04V, Zzt=60Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
FA	-	Z1SMA3V3	Zener diode	3.1..3.5V, Izt=100mA, Zzt=10Ω, 1W	DO-214AC	1d	1ab	Ttr
FAE	-	DFLT5V0A	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 24.5A, 225W(1ms)	PowDI123	7d	1d	Di
FAG	-	DFLT6V0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 21.8A, 225W(1ms)	PowDI123	7d	1d	Di
FAK	-	DFLT6V5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 20.1A, 225W(1ms)	PowDI123	7d	1d	Di
FAM	-	DFLT7V0A	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, 18.8A, 225W(1ms)	PowDI123	7d	1d	Di
FAP	-	DFLT7V5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 17.4A, 225W(1ms)	PowDI123	7d	1d	Di
FAR	-	DFLT8V0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 16.5A, 225W(1ms)	PowDI123	7d	1d	Di
FAT	-	DFLT8V5A	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 15.6A, 225W(1ms)	PowDI123	7d	1d	Di
FAV	-	DFLT9V0A	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, 14.6A, 225W(1ms)	PowDI123	7d	1d	Di
FAX	-	DFLT10A	TVS	Vrwm=10V, Vbr=11.1..12.3V, 13.2A, 225W(1ms)	PowDI123	7d	1d	Di
FAZ	-	DFLT11A	TVS	Vrwm=11V, Vbr=12.2..13.5V, 12.4A, 225W(1ms)	PowDI123	7d	1d	Di
FB	-	BZT52B22WS	Zener diode	21.56..22.44V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
FB	-	MM3ZB22H	Zener diode	21.56..22.44V, Izt=5mA, Zzt=55Ω, 300mW	SOD-323	5d	1a	Zow
FB	-	PZU5.6B1	Zener diode	5.31..5.55V, Zzt=40Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
FB	-	Z1SMA3V6	Zener diode	3.4..3.8V, Izt=100mA, Zzt=9Ω, 1W	DO-214AC	1d	1ab	Ttr
FB11	-	FBM11PT	Si-diode	Rectifer, Fast, 50V, 1A	DO-214AA	1d	1a	Chm
FB12	-	FBM12PT	Si-diode	Rectifer, Fast, 100V, 1A	DO-214AA	1d	1a	Chm
FB13	-	FBM13PT	Si-diode	Rectifer, Fast, 200V, 1A	DO-214AA	1d	1a	Chm
FB14	-	FBM14PT	Si-diode	Rectifer, Fast, 400V, 1A	DO-214AA	1d	1a	Chm
FB15	-	FBM15PT	Si-diode	Rectifer, Fast, 600V, 1A	DO-214AA	1d	1a	Chm
FB16	-	FBM16PT	Si-diode	Rectifer, Fast, 800V, 1A	DO-214AA	1d	1a	Chm
FB17	-	FBM17PT	Si-diode	Rectifer, Fast, 1000V, 1A	DO-214AA	1d	1a	Chm
FB21	-	FBM21PT	Si-diode	Rectifer, Fast, 50V, 2A	DO-214AA	1d	1a	Chm
FB22	-	FBM22PT	Si-diode	Rectifer, Fast, 100V, 2A	DO-214AA	1d	1a	Chm
FB23	-	FBM23PT	Si-diode	Rectifer, Fast, 200V, 2A	DO-214AA	1d	1a	Chm
FB24	-	FBM24PT	Si-diode	Rectifer, Fast, 400V, 2A	DO-214AA	1d	1a	Chm
FB25	-	FBM25PT	Si-diode	Rectifer, Fast, 600V, 2A	DO-214AA	1d	1a	Chm
FB26	-	FBM26PT	Si-diode	Rectifer, Fast, 800V, 2A	DO-214AA	1d	1a	Chm
FB27	-	FBM27PT	Si-diode	Rectifer, Fast, 1000V, 2A	DO-214AA	1d	1a	Chm
FB31	-	FBM31PT	Si-diode	Rectifer, Fast, 50V, 3A	DO-214AA	1d	1a	Chm
FB32	-	FBM32PT	Si-diode	Rectifer, Fast, 100V, 3A	DO-214AA	1d	1a	Chm
FB33	-	FBM33PT	Si-diode	Rectifer, Fast, 200V, 3A	DO-214AA	1d	1a	Chm
FB34	-	FBM34PT	Si-diode	Rectifer, Fast, 400V, 3A	DO-214AA	1d	1a	Chm
FB35	-	FBM35PT	Si-diode	Rectifer, Fast, 600V, 3A	DO-214AA	1d	1a	Chm
FB36	-	FBM36PT	Si-diode	Rectifer, Fast, 800V, 3A	DO-214AA	1d	1a	Chm
FB37	-	FBM37PT	Si-diode	Rectifer, Fast, 1000V, 3A	DO-214AA	1d	1a	Chm
FBA	-	SMCJ5.0CA	TVS	Vrwm=5V, Vbr=6.4..7.25V, 171A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
FBB	-	SMCJ6.0CA	TVS	Vrwm=6V, Vbr=6.67..7.67V, 52A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
FBC	-	SMCJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.3V, 140A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
FBD	-	SMCJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 105A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
FBE	-	DFLT12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, 11.3A, 225W(1ms)	PowDI123	7d	1d	Di
FBF	-	SMCJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.8V, 88.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1r	Ste
FBG	-	DFLT13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, 10.5A, 225W(1ms)	PowDI123	7d	1d	Di
FBH	-	SMCJ12CA	TVS	Vrwm=12V, Vbr=13.3..15.3V, 75.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1r	Ste
FBI	-	SMCJ13CA	TVS	Vrwm=13V, Vbr=14.4..16.5V, 73A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
FBJ	-	SMCJ15CA	TVS	Vrwm=15V, Vbr=16.7..19.2V, 61.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
FBK	-	DFLT14A	TVS	Vrwm=14V, Vbr=15.6..17.2V, 9.7A, 225W(1ms)	PowDI123	7d	1d	Di
FBL	-	SMCJ18CA	TVS	Vrwm=18V, Vbr=20..23.3V, 53A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
FBM	-	DFLT15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, 9.22A, 225W(1ms)	PowDI123	7d	1d	Di
FBM	-	SMCJ20CA	TVS	Vrwm=20V, Vbr=22.2..25.5V, 48A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
FBN	-	SMCJ22CA	TVS	Vrwm=22V, Vbr=24.4..28V, 44A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
FBO	-	SMCJ24CA	TVS	Vrwm=24V, Vbr=26.7..30.7V, 40A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
FBP	-	DFLT16A	TVS	Vrwm=16V, Vbr=17.8..19.7V, 8.65A, 225W(1ms)	PowDI123	7d	1d	Di
FBP	-	SMCJ26CA	TVS	Vrwm=26V, Vbr=28.9..33.2V, 37A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
FBQ	-	SMCJ28CA	TVS	Vrwm=28V, Vbr=31.1..35.8V, 34A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
FBR	-	DFLT17A	TVS	Vrwm=17V, Vbr=18.9..20.9V, 8.15A, 225W(1ms)	PowDI123	7d	1d	Di
FBR	-	SMCJ30CA	TVS	Vrwm=30V, Vbr=33.3..38.3V, 32A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
FBS	-	SMCJ33CA	TVS	Vrwm=33V, Vbr=36.7..44.9V, 29A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
FBT	-	DFLT18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, 7.71A, 225W(1ms)	PowDI123	7d	1d	Di
FBU	-	SMCJ40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, 24A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
FBV	-	DFLT20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, 6.94A, 225W(1ms)	PowDI123	7d	1d	Di
FBW	-	SMCJ48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, 20A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
FBX	-	DFLT22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, 6.34A, 225W(1ms)	PowDI123	7d	1d	Di
FBZ	-	DFLT24A	TVS	Vrwm=24V, Vbr=26.7..29.5V, 5.78A, 225W(1ms)	PowDI123	7d	1d	Di
FBZ	-	SMCJ58CA	TVS	Vrwm=58V, Vbr=64.4..74.1V, 16A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
FC	-	BZT52B24WS	Zener diode	23.52..24.48V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
FC	-	GBLC18CI	TVS	Vrwm=18V, 1A, 350W(1ms), 0.6pF, Bidir.	SOD-323	5ba	1e	Prt
FC	-	MM3ZB24H	Zener diode	23.52..24.48V, Izt=5mA, Zzt=60Ω, 300mW	SOD-323	5d	1a	Zow
FC	-	PZU6.2B1	Zener diode	5.86..6.12V, Zzt=30Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
FC	-	STZ8240B	Zener diode	23.5..24.7V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323	5d	1a	Jiy
FC	-	Z1SMA3V9	Zener diode	3.7..4.1V, Izt=100mA, Zzt=7.5Ω, 1W	DO-214AC	1d	1ab	Ttr
FC31	-	FCM31PT	Si-diode	Rectifer, Fast, 50V, 3A	DO-214AB	1d	1a	Chm
FC32	-	FCM32PT	Si-diode	Rectifer, Fast, 100V, 3A	DO-214AB	1d	1a	Chm
FC33	-	FCM33PT	Si-diode	Rectifer, Fast, 200V, 3A	DO-214AB	1d	1a	Chm
FC34	-	FCM34PT	Si-diode	Rectifer, Fast, 400V, 3A	DO-214AB	1d	1a	Chm
FC35	-	FCM35PT	Si-diode	Rectifer, Fast, 600V, 3A	DO-214AB	1d	1a	Chm
FC36	-	FCM36PT	Si-diode	Rectifer, Fast, 800V, 3A	DO-214AB	1d	1a	Chm
FC37	-	FCM37PT	Si-diode	Rectifer, Fast, 1000V, 3A	DO-214AB	1d	1a	Chm
FCE	-	DFLT26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, 5.35A, 225W(1ms)	PowDI123	7d	1d	Di
FCF	-	DFLT27A	TVS	Vrwm=27V, Vbr=30..33.15V, 5.15A, 225W(1ms)	PowDI123	7d	1d	Di
FCG	-	DFLT28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, 4.96A, 225W(1ms)	PowDI123	7d	1d	Di
FCK	-	DFLT30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, 4.65A, 225W(1ms)	PowDI123	7d	1d	Di
FCM	-	DFLT33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, 4.22A, 225W(1ms)	PowDI123	7d	1d	Di
FCP	-	DFLT36A	TVS	Vrwm=36V, Vbr=40.0..44.2V, 3.87A, 225W(1ms)	PowDI123	7d	1d	Di
FCR	-	DFLT40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, 3.49A, 225W(1ms)	PowDI123	7d	1d	Di
FCT	-	DFLT43A	TVS	Vrwm=43V, Vbr=47.8..52.8V, 3.24A, 225W(1ms)	PowDI123	7d	1d	Di
FCV	-	DFLT45A	TVS	Vrwm=45V, Vbr=50.0..55.3V, 3.10A, 225W(1ms)	PowDI123	7d	1d	Di
FCX	-	DFLT48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, 2.91A, 225W(1ms)	PowDI123	7d	1d	Di
FCZ	-	DFLT51A	TVS	Vrwm=51V, Vbr=56.7..62.7V, 2.73A, 225W(1ms)	PowDI123	7d	1d	Di
FD	-	BZT52B27WS	Zener diode	26.46..27.54V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
FD	-	KDZ33B	Zener diode	33V±2.5%, 10mA, 1W	PMDU	7d	1s	Rhm
FD	-	MM3ZB27H	Zener diode	26.46..27.54V, Izt=5mA, Zzt=70Ω, 300mW	SOD-323	5d	1a	Zow
FD	-	P6SMBJ220C	TVS	Vrwm=220V, Vbr=198..242V, 1.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
FD	-	PZU6.8B1	Zener diode	6.47..6.73V, Zzt=20Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
FD	-	STZ8270B	Zener diode	26.3..27.7V, Izt=2mA, Zzt=120Ω, 300mW	SOD-323	5d	1a	Jiy
FD	-	Z1SMA47	Zener diode	44..50V, Izt=10mA, Zzt=45Ω, 1W	DO-214AC	1d	1ab	Ttr
FD	-	Z1SMA47	Zener diode	47V±5%, Izt=10mA, 1.3W	DO-214AC	1d	2j	Fag
FDJ	-	1.5SMC47	TVS	Vrwm=38.1V, Vbr=42.3..51.7V, Ipp=22.2A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FE	-	BZT52B30WS	Zener diode	29.40..30.60V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
FE	-	MM3ZB30H	Zener diode	29.4..30.6V, Izt=5mA, Zzt=80Ω, 300mW	SOD-323	5d	1a	Zow
FE	-	P6SMBJ220CA	TVS	Vrwm=170V, 1.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Pjt
FE	-	PZU7.5B1	Zener diode	7.06..7.36V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
FE	-	SMF5.0A	TVS	Vrwm=5.0V, Vbr=6.4..7.0V, 21.7A, 200W(10/1000μs)	SOD-123FL	7d	1a	Ers
FE	-	STZ8300B	Zener diode	29.3..30.8V, Izt=2mA, Zzt=160Ω, 300mW	SOD-323	5d	1a	Jiy
FE	-	TV02W120-G	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=10.1A, 200W(1ms)	SOD-123	5d	2o	Cmc
FE	-	TV02W5V0-G	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=21.7A, 200W(1ms)	SOD-123	5d	2o	Cmc
FE	-	TV06B301JB-G	TVS	Vrwm=300.0V, Vbr=335.0..371.0V, Ipp=1.23A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
FEJ	-	1.5SMC47A	TVS	Vrwm=40.2V, Vbr=44.7..49.4V, Ipp=23.2A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FF	-	BZT52B33WS	Zener diode	32.34..33.66V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
FF	-	MAZD091	Zener diode	8.5..9.6V, Zzt=20Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
FF	-	MM3ZB33H	Zener diode	32.34..33.66V, Izt=5mA, Zzt=80Ω, 300mW	SOD-323	5d	1a	Zow
FF	-	PZU8.2B1	Zener diode	7.76..8.1V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
FF	-	Z1SMA51	Zener diode	48..54V, Izt=10mA, Zzt=60Ω, 1W	DO-214AC	1d	1ab	Ttr
FF	-	Z1SMA51	Zener diode	51V±5%, Izt=10mA, 1.3W	DO-214AC	1d	2j	Fag
FFJ	-	1.5SMC51	TVS	Vrwm=41.3V, Vbr=45.9..56.1V, Ipp=20.4A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FG	-	PZU9.1B1	Zener diode	8.56..8.93V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
FG	-	SMF6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 19.4A, 200W(10/1000μs)	SOD-123FL	7d	1a	Ers
FG	-	TV02W6V0-G	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=19.4A, 200W(1ms)	SOD-123	5d	2o	Cmc
FG	-	TV06B351JB-G	TVS	Vrwm=350.0V, Vbr=391.0..432.0V, Ipp=1.06A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Cmc
FG	-	Z1SMA56	Zener diode	52..60V, Izt=10mA, Zzt=60Ω, 1W	DO-214AC	1d	1ab	Ttr
FG	-	Z1SMA56	Zener diode	56V±5%, Izt=10mA, 1.3W	DO-214AC	1d	2j	Fag

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
FG36	-	STPS3L60UF	Si-diode	SBR, 60V, 3A, Vf<0.59V(3A)	SMB-F	7d	1a	Ste
FGJ	-	1.5SMC51A	TVS	Vrwm=43.6V, Vbr=48.5..53.6V, Ipp=21.4A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FH	-	BZT52B36WS	Zener diode	35.28..36.72V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
FH	-	MM3ZB36H	Zener diode	35.28..36.72V, Izt=5mA, Zzt=90Ω, 300mW	SOD-323	5d	1a	Zow
FH	-	PZU10B1	Zener diode	9.45..9.87V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
FH	-	Z1SMA62	Zener diode	58..66V, Izt=10mA, Zzt=80Ω, 1W	DO-214AC	1d	1ab	Ttr
FH	-	Z1SMA62	Zener diode	62V±5%, Izt=10mA, 1.3W	DO-214AC	1d	2j	Fag
FHJ	-	1.5SMC56	TVS	Vrwm=45.6V, Vbr=50.4..61.6V, Ipp=18.6A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FHK	-	DFLZ5V1	Zener diode	5.1V±5%, Izt=100mA, Zzt<6Ω, 1W	PowDI123	7d	1d	Di
FHL	-	DFLZ5V6	Zener diode	5.6V±5%, Izt=100mA, Zzt<4Ω, 1W	PowDI123	7d	1d	Di
FHN	-	DFLZ6V2	Zener diode	6.2V±5%, Izt=100mA, Zzt<3Ω, 1W	PowDI123	7d	1d	Di
FHO	-	DFLZ6V8	Zener diode	6.8V±5%, Izt=100mA, Zzt<3Ω, 1W	PowDI123	7d	1d	Di
FHQ	-	DFLZ7V5	Zener diode	7.5V±5%, Izt=100mA, Zzt<2Ω, 1W	PowDI123	7d	1d	Di
FHR	-	DFLZ8V2	Zener diode	8.2V±5%, Izt=100mA, Zzt<2Ω, 1W	PowDI123	7d	1d	Di
FHR7	-	SM15T200A	TVS	Vrwm=171V, Vbr=190..210V, 5.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
FHR7	-	SM15T200CA	TVS	Vrwm=171V, Vbr=190..210V, 5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
FHT	-	DFLZ9V1	Zener diode	9.1V±5%, Izt=50mA, Zzt<4Ω, 1W	PowDI123	7d	1d	Di
FHU	-	DFLZ10	Zener diode	10V±5%, Izt=50mA, Zzt<4Ω, 1W	PowDI123	7d	1d	Di
FHV	-	DFLZ11	Zener diode	11V±5%, Izt=50mA, Zzt<7Ω, 1W	PowDI123	7d	1d	Di
FHW	-	DFLZ12	Zener diode	12V±5%, Izt=50mA, Zzt<7Ω, 1W	PowDI123	7d	1d	Di
FHX	-	DFLZ13	Zener diode	13V±5%, Izt=50mA, Zzt<10Ω, 1W	PowDI123	7d	1d	Di
FHZ	-	DFLZ15	Zener diode	15V±5%, Izt=50mA, Zzt<10Ω, 1W	PowDI123	7d	1d	Di
FJ	-	BZT52B39WS	Zener diode	38.22..39.78V, Izt=2.5mA, 300mW	SOD-323F	7d	1a	Ttr
FJ	-	MM3ZB39H	Zener diode	38.22..39.78V, Izt=2.5mA, Zzt=100Ω, 300mW	SOD-323	5d	1a	Zow
FJ	-	PZU11B1	Zener diode	10.44..10.88V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
FJ	-	STZ8390B	Zener diode	38..40V, Izt=2mA, Zzt=300Ω, 300mW	SOD-323	5d	1a	Jiy
FJA	-	DFLZ16	Zener diode	16V±5%, Izt=25mA, Zzt<15Ω, 1W	PowDI123	7d	1d	Di
FJF	-	DFLZ18	Zener diode	18V±5%, Izt=25mA, Zzt<15Ω, 1W	PowDI123	7d	1d	Di
FJG	-	DFLZ20	Zener diode	20V±5%, Izt=25mA, Zzt<15Ω, 1W	PowDI123	7d	1d	Di
FJK	-	DFLZ22	Zener diode	22V±5%, Izt=25mA, Zzt<15Ω, 1W	PowDI123	7d	1d	Di
FJL	-	DFLZ24	Zener diode	24V±5%, Izt=25mA, Zzt<15Ω, 1W	PowDI123	7d	1d	Di
FJN	-	DFLZ27	Zener diode	27V±5%, Izt=25mA, Zzt<15Ω, 1W	PowDI123	7d	1d	Di
FJQ	-	DFLZ30	Zener diode	30V±5%, Izt=15mA, Zzt<22Ω, 1W	PowDI123	7d	1d	Di
FJR	-	DFLZ33	Zener diode	33V±5%, Izt=15mA, Zzt<24Ω, 1W	PowDI123	7d	1d	Di
FJS	-	DFLZ36	Zener diode	36V±5%, Izt=10mA, Zzt<40Ω, 1W	PowDI123	7d	1d	Di
FJT	-	DFLZ39	Zener diode	39V±5%, Izt=10mA, Zzt<40Ω, 1W	PowDI123	7d	1d	Di
FK	-	PZU12B1	Zener diode	11.42..11.9V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
FK	-	SMF6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 17.9A, 200W(10/1000μs)	SOD-123FL	7d	1a	Ers
FK	-	TV02W6V5-G	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=17.9A, 200W(1ms)	SOD-123	5d	2o	Cmc
FK	-	TV06B401JB-G	TVS	Vrwm=400.0V, Vbr=447.0..494.0V, Ipp=0.93A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
FK	-	Z1SMA68	Zener diode	64..72V, Izt=10mA, Zzt=80Ω, 1W	DO-214AC	1d	1ab	Ttr
FK	-	Z1SMA68	Zener diode	68V±5%, Izt=10mA, 1.3W	DO-214AC	1d	2j	Fag
FKJ	-	1.5SMC56A	TVS	Vrwm=47.8V, Vbr=53.2..58.8V, Ipp=19.5A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FL	-	PZU13B1	Zener diode	12.47..13.03V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
FL	-	Z1SMA75	Zener diode	70..80V, Izt=10mA, Zzt=100Ω, 1W	DO-214AC	1d	1ab	Ttr
FL	-	Z1SMA75	Zener diode	75V±5%, Izt=10mA, 1.3W	DO-214AC	1d	2j	Fag
FLJ	-	1.5SMC62	TVS	Vrwm=50.2V, Vbr=55.8..68.2V, Ipp=16.9A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FM	-	1N60PW	Si-diode	SBD, Sw, 45V, 50mA, Vf<0.45V(50mA), 1pF	SOD-123FL	7d	1a	Sme
FM	-	PZU15B1	Zener diode	13.84..14.46V, Zzt=15Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
FM	-	SMF7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, 16.7A, 200W(10/1000μs)	SOD-123FL	7d	1a	Ers
FM	-	TV02W7V0-G	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=16.7A, 200W(1ms)	SOD-123	5d	2o	Cmc
FM	-	TV06B441JB-G	TVS	Vrwm=440.0V, Vbr=492.0..543.0V, Ipp=0.84A, 600W(1ms), Bidir.	DO-214AA	1ba	2o	Cmc
FM	-	Z1SMA82	Zener diode	77..87V, Izt=10mA, Zzt=100Ω, 1W	DO-214AC	1d	1ab	Ttr
FM	-	Z1SMA82	Zener diode	82V±5%, Izt=10mA, 1.3W	DO-214AC	1d	2j	Fag
FMJ	-	1.5SMC62A	TVS	Vrwm=53V, Vbr=58.9..65.1V, Ipp=17.7A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FN	-	1N60SW	Si-diode	SBD, Sw, 45V, 50mA, Vf<0.45V(50mA), 1pF	SOD-123FL	7d	1a	Sme
FN	-	PZU16B1	Zener diode	15.37..16.01V, Zzt=20Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
FN	-	Z1SMA91	Zener diode	85..96V, Izt=5mA, Zzt=200Ω, 1W	DO-214AC	1d	1ab	Ttr
FN	-	Z1SMA91	Zener diode	91V±5%, Izt=5mA, 1.3W	DO-214AC	1d	2j	Fag
FNJ	-	1.5SMC68	TVS	Vrwm=55.1V, Vbr=61.2..74.8V, Ipp=15.3A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FP	-	CMDZ3L3	Zener diode	3.135..3.465V, Izt=0.5mA, Zzt=900Ω, 250mW	SOD-323	5d	1a	Cen
FP	-	PZU18B1	Zener diode	16.94..17.70V, Zzt=20Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
FP	-	SM6T68	TVS	Vrwm=58.1V, Vbr=64.6..71.40V, 6.5A, 600W(1ms), Bidir.	DO-214AA	1d	1q	Ste
FP	-	SMBJ160CA	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1x	Di
FP	-	SMF7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 15.5A, 200W(10/1000μs)	SOD-123FL	7d	1a	Ers
FP	-	TV02W7V5-G	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=15.5A, 200W(1ms)	SOD-123	5d	2o	Cmc
FP	-	Z1SMA100	Zener diode	100V±5%, Izt=5mA, 1.3W	DO-214AC	1d	2j	Fag
FP	-	Z1SMA100	Zener diode	94..106V, Izt=5mA, Zzt=200Ω, 1W	DO-214AC	1d	1ab	Ttr
FPJ	-	1.5SMC68A	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, Ipp=16.3A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FQ	-	PZU20B1	Zener diode	18.86..19.7V, Zzt=20Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
FQ	-	SM6T68A	TVS	Vrwm=58.1V, Vbr=64.6..71.40V, 6.5A, 600W(1ms), Bidir.	DO-214AA	1d	1q	Mde
FQ	-	Z1SMA110	Zener diode	104..116V, Izt=5mA, Zzt=250Ω, 1W	DO-214AC	1d	1ab	Ttr
FQ	-	Z1SMA110	Zener diode	12V±5%, Izt=5mA, 1.3W	DO-214AC	1d	2j	Fag
FQJ	-	1.5SMC75	TVS	Vrwm=60.7V, Vbr=67.5..82.5V, Ipp=13.9A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FR	-	BZT52B3V0WT	Zener diode	2.940..3.060V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
FR	-	MM5Z3B0H	Zener diode	2.94..3.06V, Zzt=120Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
FR	-	PZU22B1	Zener diode	20.88..21.77V, Zzt=25Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
FR	-	RL52Z3V0	Zener diode	2.94..3.06V, Zzt=120Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
FR	-	SMF8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 14.7A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
FR	-	TV02W8V0-G	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=14.7A, 200W(1ms)	SOD-123	5d	2o	Cmc
FR	-	Z1SMA120	Zener diode	114..127V, Izt=5mA, Zzt=250Ω, 1W	DO-214AC	1d	1ab	Ttr
FR	-	Z1SMA120	Zener diode	13V±5%, Izt=5mA, 1.3W	DO-214AC	1d	2j	Fag
FRJ	-	1.5SMC75A	TVS	Vrwm=64.1V, Vbr=71.3..78.8V, Ipp=14.6A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FS	-	PZU24B1	Zener diode	22.93..23.96V, Zzt=30Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
FS	-	Z1SMA130	Zener diode	124..141V, Izt=5mA, Zzt=300Ω, 1W	DO-214AC	1d	1ab	Ttr
FS	-	Z1SMA130	Zener diode	15V±5%, Izt=5mA, 1.3W	DO-214AC	1d	2j	Fag
FS11	-	FSM11PT	Si-diode	Rectifer, Fast, 50V, 1A	DO-214AC	1d	1a	Chm
FS12	-	FSM12PT	Si-diode	Rectifer, Fast, 100V, 1A	DO-214AC	1d	1a	Chm
FS13	-	FSM13PT	Si-diode	Rectifer, Fast, 200V, 1A	DO-214AC	1d	1a	Chm
FS14	-	FSM14PT	Si-diode	Rectifer, Fast, 400V, 1A	DO-214AC	1d	1a	Chm
FS15	-	FSM15PT	Si-diode	Rectifer, Fast, 600V, 1A	DO-214AC	1d	1a	Chm
FS16	-	FSM16PT	Si-diode	Rectifer, Fast, 800V, 1A	DO-214AC	1d	1a	Chm
FS17	-	FSM17PT	Si-diode	Rectifer, Fast, 1000V, 1A	DO-214AC	1d	1a	Chm
FS21	-	FSM21PT	Si-diode	Rectifer, Fast, 50V, 2A	DO-214AC	1d	1a	Chm
FS22	-	FSM22PT	Si-diode	Rectifer, Fast, 100V, 2A	DO-214AC	1d	1a	Chm
FS23	-	FSM23PT	Si-diode	Rectifer, Fast, 200V, 2A	DO-214AC	1d	1a	Chm
FS24	-	FSM24PT	Si-diode	Rectifer, Fast, 400V, 2A	DO-214AC	1d	1a	Chm
FS25	-	FSM25PT	Si-diode	Rectifer, Fast, 600V, 2A	DO-214AC	1d	1a	Chm
FS26	-	FSM26PT	Si-diode	Rectifer, Fast, 800V, 2A	DO-214AC	1d	1a	Chm
FS27	-	FSM27PT	Si-diode	Rectifer, Fast, 1000V, 2A	DO-214AC	1d	1a	Chm
FSJ	-	1.5SMC82	TVS	Vrwm=66.4V, Vbr=73.8..90.2V, Ipp=12.7A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FT	-	SMF8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.40V, 13.9A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
FT	-	TV02W8V5-G	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, Ipp=13.9A, 200W(1ms)	SOD-123	5d	2o	Cmc
FT	-	Z1SMA150	Zener diode	138..156V, Izt=5mA, Zzt=300Ω, 1W	DO-214AC	1d	1ab	Ttr
FT	-	Z1SMA150	Zener diode	150V±5%, Izt=5mA, 1.3W	DO-214AC	1d	2j	Fag
FTJ	-	1.5SMC82A	TVS	Vrwm=70.1V, Vbr=77.9..86.1V, Ipp=13.3A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FU	-	Z1SMA160	Zener diode	153..171V, Izt=5mA, Zzt=350Ω, 1W	DO-214AC	1d	1ab	Ttr
FU	-	Z1SMA160	Zener diode	160V±5%, Izt=5mA, 1.3W	DO-214AC	1d	2j	Fag
FUA	-	SMCJ5.0A	TVS	Vrwm=5V, Vbr=6.4..7.25V, 171A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUB	-	SMCJ6.0A	TVS	Vrwm=6V, Vbr=6.67..7.67V, 152A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUC	-	SMCJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.3V, 140A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUD	-	SMCJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 105A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUF	-	SMCJ10A	TVS	Vrwm=10V, Vbr=11.1..13.6V, 92A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUH	-	SMCJ12A	TVS	Vrwm=12V, Vbr=13.3..15.3V, 79A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUI	-	SMCJ13A	TVS	Vrwm=13V, Vbr=14.4..16.5V, 73A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUJ	-	1.5SMC91	TVS	Vrwm=73.7V, Vbr=81.9..100V, Ipp=11.4A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FUJ	-	SMCJ15A	TVS	Vrwm=15V, Vbr=16.7..19.2V, 64A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUL	-	SMCJ18A	TVS	Vrwm=18V, Vbr=20..23.3V, 53A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUM	-	SMCJ20A	TVS	Vrwm=20V, Vbr=22.2..25.5V, 48A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUN	-	SMCJ22A	TVS	Vrwm=22V, Vbr=24.4..28V, 44A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUO	-	SMCJ24A	TVS	Vrwm=24V, Vbr=26.7..30.7V, 40A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUP	-	SMCJ26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, 37A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUQ	-	SMCJ28A	TVS	Vrwm=28V, Vbr=31.1..38.0V, 34A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUR	-	SMCJ30A	TVS	Vrwm=30V, Vbr=33.3..38.3V, 32A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUS	-	SMCJ33A	TVS	Vrwm=33V, Vbr=36.7..44.9V, 29A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUU	-	SMCJ40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, 24A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUW	-	SMCJ48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, 20A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FUZ	-	SMCJ58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, 16A, 1500W(1ms)	DO-214AB	1d	1q	Ste
FV	-	SMF9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, 13.0A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
FV	-	TV02W9V0-G	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, Ipp=13.0A, 200W(1ms)	SOD-123	5d	2o	Cmc
FV	-	Z1SMA180	Zener diode	168..191V, Izt=5mA, Zzt=400Ω, 1W	DO-214AC	1d	1ab	Ttr
FV	-	Z1SMA180	Zener diode	180V±5%, Izt=5mA, 1.3W	DO-214AC	1d	2j	Fag
FVJ	-	1.5SMC91A	TVS	Vrwm=77.8V, Vbr=86.5..95.5V, Ipp=12A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FW	-	Z1SMA200	Zener diode	188..212V, Izt=5mA, Zzt=400Ω, 1W	DO-214AC	1d	1ab	Ttr
FW	-	Z1SMA200	Zener diode	200V±5%, Izt=5mA, 1.3W	DO-214AC	1d	2j	Fag
FWA	-	1.5SMC200	TVS	Vrwm=162V, Vbr=180..220V, Ipp=5.2A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FWB	-	1.5SMC200A	TVS	Vrwm=171V, Vbr=190..210V, Ipp=5.5A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FWC	-	1.5SMC220	TVS	Vrwm=175V, Vbr=198..242V, Ipp=4.3A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FWD	-	1.5SMC220A	TVS	Vrwm=185V, Vbr=209..231V, Ipp=4.6A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FWE	-	1.5SMC250	TVS	Vrwm=202V, Vbr=225..275V, Ipp=4.3A, 1500W(1ms)	DO-214AB	1d	1b	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
FWF	-	1.5SMC250A	TVS	Vrwm=214V, Vbr=237..263V, Ipp=4.5A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FWJ	-	1.5SMC100	TVS	Vrwm=81V, Vbr=90..110V, Ipp=10.4A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FX	-	BZT52B3V3WT	Zener diode	3.234..3.366V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
FX	-	MM5Z3B3H	Zener diode	3.234..3.366V, Zzt=130Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
FX	-	RL52Z3V3	Zener diode	3.234..3.366V, Zzt=130Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
FX	-	SM6T100	TVS	Vrwm=85.5V, Vbr=95..105V, 4.4A, 600W(1ms)	DO-214AA	1d	1q	Ste
FX	-	SMF10A	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, 11.8A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
FX	-	TV02W100-G	TVS	Vrwm=10V, Vbr=11.1..12.3V, Ipp=11.8A, 200W(1ms)	SOD-123	5d	2o	Cmc
FX	-	Z1SMA4V3	Zener diode	4.0..4.6V, Izt=100mA, Zzt=6Ω, 1W	DO-214AC	1d	1ab	Ttr
FXA	-	1.5SMC22	TVS	Vrwm=17.8V, Vbr=19.8..24.2V, Ipp=47A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXB	-	1.5SMC22A	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, Ipp=49A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXC	-	1.5SMC24	TVS	Vrwm=19.4V, Vbr=21.6..26.4V, Ipp=43A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXD	-	1.5SMC24A	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, Ipp=45A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXE	-	1.5SMC27	TVS	Vrwm=21.8V, Vbr=24.3..29.7V, Ipp=38.5A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXF	-	1.5SMC27A	TVS	Vrwm=23.1V, Vbr=25.7..28.4 V, Ipp=40A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXG	-	1.5SMC30	TVS	Vrwm=24.3V, Vbr=27..33V, Ipp=34.5A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXH	-	1.5SMC30A	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, Ipp=36A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXJ	-	1.5SMC100A	TVS	Vrwm=85.5V, Vbr=95..105V, Ipp=11A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FXJ	-	1.5SMC33	TVS	Vrwm=26.8V, Vbr=29.7..36.3V, Ipp=31.5A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXK	-	1.5SMC33A	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, Ipp=33A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXL	-	1.5SMC36	TVS	Vrwm=29.1V, Vbr=32.4..39.6V, Ipp=29A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXM	-	1.5SMC36A	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, Ipp=30A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXN	-	1.5SMC39	TVS	Vrwm=31.6V, Vbr=35.1..42.9V, Ipp=26.5A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXP	-	1.5SMC39A	TVS	Vrwm=33.3V, Vbr=37.1..41V, Ipp=28A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXQ	-	1.5SMC43	TVS	Vrwm=34.8V, Vbr=38.7..47.3V, Ipp=24A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXR	-	1.5SMC43A	TVS	Vrwm=36.8V, Vbr=40.9..45.2V, Ipp=25.3A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXS	-	1.5SMC47	TVS	Vrwm=38.1V, Vbr=42.3..51.7V, Ipp=22.2A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXT	-	1.5SMC47A	TVS	Vrwm=40.2V, Vbr=44.7..49.4V, Ipp=23.2A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXU	-	1.5SMC51	TVS	Vrwm=41.3V, Vbr=45.9..56.1V, Ipp=20.4A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXV	-	1.5SMC51A	TVS	Vrwm=43.6V, Vbr=48.5..53.6V, Ipp=21.4A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXW	-	1.5SMC56	TVS	Vrwm=45.6V, Vbr=50.4..61.6V, Ipp=18.6A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXX	-	1.5SMC56A	TVS	Vrwm=47.8V, Vbr=53.2..58.8V, Ipp=19.5A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXY	-	1.5SMC62	TVS	Vrwm=50.2V, Vbr=55.8..68.2V, Ipp=16.9A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FXZ	-	1.5SMC62A	TVS	Vrwm=53V, Vbr=58.9..65.1V, Ipp=17.7A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FY	-	BZT52B3V6WT	Zener diode	3.528..3.672V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
FY	-	KDZ3.3VVY	Zener diode	3.25..3.50V, Izt=5mA, Zzt=130Ω, 100mW	VSC	7d	1a	Kec
FY	-	MM5Z3B6H	Zener diode	3.528..3.672V, Zzt=130Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
FY	-	RL52Z3V6	Zener diode	3.528..3.672V, Zzt=130Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
FY	-	SM6T100A	TVS	Vrwm=85.5V, Vbr=95..105V, 4.4A, 600W(1ms)	DO-214AA	1d	1a	Mde
FY	-	Z1SMA4V7	Zener diode	4.4..5.0V, Izt=100mA, Zzt=5Ω, 1W	DO-214AC	1d	1ab	Ttr
FYA	-	1.5SMC68	TVS	Vrwm=55.1V, Vbr=61.2..74.8V, Ipp=15.3A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYB	-	1.5SMC68A	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, Ipp=16.3A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYC	-	1.5SMC75	TVS	Vrwm=60.7V, Vbr=67.5..82.5V, Ipp=13.9A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYD	-	1.5SMC75A	TVS	Vrwm=64.1V, Vbr=71.3..78.8V, Ipp=14.6A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYE	-	1.5SMC82	TVS	Vrwm=66.4V, Vbr=73.8..90.2V, Ipp=12.7A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYF	-	1.5SMC82A	TVS	Vrwm=70.1V, Vbr=77.9..86.1V, Ipp=13.3A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYG	-	1.5SMC91	TVS	Vrwm=73.7V, Vbr=81.9..100V, Ipp=11.4A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYH	-	1.5SMC91A	TVS	Vrwm=77.8V, Vbr=86.5..95.5V, Ipp=12A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYJ	-	1.5SMC100	TVS	Vrwm=81V, Vbr=90..110V, Ipp=10.4A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYJ	-	1.5SMC110	TVS	Vrwm=89.2V, Vbr=99..121V, Ipp=9.5A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FYK	-	1.5SMC100A	TVS	Vrwm=85.5V, Vbr=95..105V, Ipp=11A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYL	-	1.5SMC110	TVS	Vrwm=89.2V, Vbr=99..121V, Ipp=9.5A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYM	-	1.5SMC110A	TVS	Vrwm=94V, Vbr=105..116V, Ipp=9.9A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYN	-	1.5SMC120	TVS	Vrwm=97.2V, Vbr=108..132V, Ipp=8.7A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYP	-	1.5SMC120A	TVS	Vrwm=102V, Vbr=114..126V, Ipp=9.1A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYQ	-	1.5SMC130	TVS	Vrwm=105V, Vbr=117..143V, Ipp=8A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYR	-	1.5SMC130A	TVS	Vrwm=111V, Vbr=124..137V, Ipp=8.4A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYS	-	1.5SMC150	TVS	Vrwm=121V, Vbr=135..165V, Ipp=7A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYT	-	1.5SMC150A	TVS	Vrwm=128V, Vbr=143..158V, Ipp=7.2A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYU	-	1.5SMC160	TVS	Vrwm=130V, Vbr=144..176V, Ipp=6.5A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYV	-	1.5SMC160A	TVS	Vrwm=136V, Vbr=152..168V, Ipp=6.8A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYW	-	1.5SMC170	TVS	Vrwm=138V, Vbr=153..187V, Ipp=6.2A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYX	-	1.5SMC170A	TVS	Vrwm=145V, Vbr=162..179V, Ipp=6.4A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYY	-	1.5SMC180	TVS	Vrwm=146V, Vbr=162..198V, Ipp=5.8A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FYZ	-	1.5SMC180A	TVS	Vrwm=154V, Vbr=171..189V, Ipp=6.1A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZ	-	3T400AA	Thy-SPD	Vdrm=360V, Vs=450V, Ipp=35A, 30pF	DO-214AA	1d	1a	Mde
FZ	-	BZT52B10S	Zener diode	9.80..10.20V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323FL	7d	1a	Tsc
FZ	-	BZT52B3V9WT	Zener diode	3.822..3.978V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
FZ	-	MM3Z10VB	Zener diode	9.80..10.20V, Zzt=18Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
FZ	-	MM3Z10VBW	Zener diode	9.80..10.20V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323FL	7d	1a	Tac

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
FZ	-	MM5Z3B9H	Zener diode	3.822..3.978V, Zzt=130Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
FZ	-	P4000SAA	Thy-SPD	Vdrm=360V, Vs=450V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Mde
FZ	-	RL52Z3V9	Zener diode	3.822..3.978V, Zzt=130Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
FZ	-	SMF11A	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, 11.0A, 200W(10/1000μs)	SOD-123FL	7d	1a	Ers
FZ	-	TCMM3Z10VB	Zener diode	10V±2%, Izt=5mA, Zzt=18Ω, 200mW	SOD-323FL	7d	1a	Tac
FZ	-	TV02W110-G	TVS	Vrwm=11V, Vbr=12.2..13.5V, Ipp=11.0A, 200W(1ms)	SOD-123	5d	2o	Cmc
FZA	-	1.5SMC6.8	TVS	Vrwm=5.5V, Vbr=6.12..7.48V, Ipp=139A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZB	-	1.5SMC6.8A	TVS	Vrwm=5.8V, Vbr=6.45..7.14 V, Ipp=143A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZC	-	1.5SMC7.5	TVS	Vrwm=6.05V, Vbr=6.75..8.25V, Ipp=128A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZD	-	1.5SMC7.5A	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=132A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZE	-	1.5SMC8.2	TVS	Vrwm=6.63V, Vbr=7.38..9.02V, Ipp=120A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZF	-	1.5SMC8.2A	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=124A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZG	-	1.5SMC9.1	TVS	Vrwm=7.37V, Vbr=8.19..10V, Ipp=109A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZH	-	1.5SMC9.1A	TVS	Vrwm=7.78V, Vbr=8.65..9.5V, Ipp=112A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZJ	-	1.5SMC10	TVS	Vrwm=8.1V, Vbr=9..11V, Ipp=100A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZJ	-	1.5SMC110A	TVS	Vrwm=94V, Vbr=105..116V, Ipp=9.9A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
FZK	-	1.5SMC10A	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, Ipp=103A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZL	-	1.5SMC11	TVS	Vrwm=8.92V, Vbr=9.9..12.1V, Ipp=93A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZM	-	1.5SMC11A	TVS	Vrwm=9.4V, Vbr=10.5..11.6V, Ipp=96A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZN	-	1.5SMC12	TVS	Vrwm=9.72V, Vbr=10.8..13.2V, Ipp=87A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZP	-	1.5SMC12A	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, Ipp=90A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZQ	-	1.5SMC13	TVS	Vrwm=10.5V, Vbr=11.7..14.3V, Ipp=79A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZR	-	1.5SMC13A	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, Ipp=82A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZS	-	1.5SMC15	TVS	Vrwm=12.1V, Vbr=13.5..16.5V, Ipp=68A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZT	-	1.5SMC15A	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, Ipp=71A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZU	-	1.5SMC16	TVS	Vrwm=12.9V, Vbr=14.4..17.6V, Ipp=64A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZV	-	1.5SMC16A	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, Ipp=67A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZW	-	1.5SMC18	TVS	Vrwm=14.5V, Vbr=16.2..19.8V, Ipp=56.5A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZX	-	1.5SMC18A	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, Ipp=59.5A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZY	-	1.5SMC20	TVS	Vrwm=16.2V, Vbr=18..22V, Ipp=51.5A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
FZZ	-	1.5SMC20A	TVS	Vrwm=17.1V, Vbr=19..21V, Ipp=54A, 1500W(1ms)	DO-214AB	1d	1b	Pjt
G	-	1PS79SB70	Si-diode	SBD, Hi-Speed, 70V, 70mA, <2pF	SOD-523	6d	1a	Nxp
G	-	1SS387PT	Si-diode	Sw, 85V, 100mA, Vf<1.2V(100mA), 4ns	SOD-523	6d	1a	Chm
G	-	BAR63-02V	PIN-diode	Sw, RF, 100V, 100mA, Vf<1.1V(50mA), < 0.3pF	SOD-523	6d	1a	Inf
G	-	BAR63-03W	PIN-diode	Sw, RF, 100V, 100mA, Vf<1.1V(50mA), < 0.3pF	SOD-323	5d	1a	Inf
G	-	ESD9Z5.0	TVS	Vrwm=5.0V, Vbr=6.2V, 12.3A, 107W(20ms)	SOD-923FL	7d	1a	Frm
G	-	MAZF082	Zener diode	7.7..8.7V, Zzt=20Ω(5mA), 120mW	S-Mini	8d	1a	Pan
G	-	MAZN082	Zener diode	7.7..8.7V, Zzt=20Ω(5mA), 120mW	SSMini2	7d	1a	Pan
g	-	MMSZ5233BPT	Zener diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 225mW	SOD-523	6d	1a	Chm
g	-	MMSZ5239BPT	Zener diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 225mW	SOD-523	6d	1a	Chm
g	-	SD05	TVS	Vrwm=5V, Vbr=6.2..7.3V, Ipp=24A, 350W(1ms)	SOD-323	5d	2m	Lif
G	-	SD12C	TVS	Vrwm=12.0V, Vbr=13.3..19V, Ipp=15A, 350W(1ms), Bidir.	SOD-323	5ba	2m	Lif
G	-	TVS100W5V0D	TVS	Vrwm=5.0V, Vbr=6.2V, 8.7A, 100W(1ms)	SOD-923	7d	1d	Did
G	au	MMSZ5256BPT	Zener diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 225mW	SOD-523	6d	1a	Chm
G.	au	MMSZ5256SPT	Zener diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 225mW	SOD-523	6d	1a	Chm
G0	-	BZD27C62P	Zener diode	58..66V, Zzt=25Ω, Izt=10mA, 1W	SOD-123FL	7d	2u	Tsc
G0	-	BZD27C62P	Zener diode	58..66V, Zzt=25Ω, Izt=10mA, 800mW	SOD-123FL	7d	1i	Vs
G0	-	MMPZ5249BPT	Zener diode	18.05..19.95V, Izt=5mA, Zzt=42Ω, 225mW	SOD-323	5d	1a	Chm
G1	-	1PS79SB30	Si-diode	SBD, U-Speed, 40V, 200mA, <20pF	SOD-523	6d	1a	Phi
G1	-	3T064AA	Thy-SPD	Vdrm=58V, Vs=77V, Ipp=35A, 60pF	DO-214AA	1d	1a	Mde
G1	-	BZD27C68P	Zener diode	64..72V, Zzt=25Ω, Izt=10mA, 1W	SOD-123FL	7d	2u	Tsc
G1	-	BZD27C68P	Zener diode	64..72V, Zzt=25Ω, Izt=10mA, 800mW	SOD-123FL	7d	1i	Vs
G1	-	CZRV5226B-G	Zener diode	3.14..3.47V, Zzt=28Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
G1	-	CZRW5226B-G	Zener diode	3.14..3.47V, Zzt=28Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
G1	-	FRS2A	Si-diode	Rectifier, Fast-Recovery 50V, 1.5A, <250ns	DO-214AA	1d	2j	Fag
G1	-	MMSZ5226B	Zener diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 500mW	SOD-123	5d	1d	Di
G1	-	MMSZ5226BS	Zener diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 200mW	SOD-323	5d	1d	Di
G1	-	P0640SAA	Thy-SPD	Vdrm=58V, Vs=77V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Mde
G1	ag	MMSZ5226B	Zener diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 500mW	SOD-123	5d	1d	Di
G10	-	BZG03-C10	Zener diode	10V±5%, Izt=50mA, Zzt=2Ω, 1.25W	DO-214AC	1d	1a	Gal
G10	-	SS10100FL	Si-diode	SBR, 100V, 1A, Vf<0.82V(1A)	SOD-123FL	7d	1a	Pjt
G100	-	BZG03-C100	Zener diode	100V±5%, Izt=5mA, Zzt=60Ω, 1.25W	DO-214AC	1d	1a	Gal
G11	-	BZG03-C11	Zener diode	11V±5%, Izt=50mA, Zzt=4Ω, 1.25W	DO-214AC	1d	1a	Gal
G11	-	STPS1H100U	Si-diode	SBR, 100V, 1A, Vf<0.62V(1A)	DO-214AA	1d	1a	Ste
G110	-	BZG03-C110	Zener diode	110V±5%, Izt=5mA, Zzt=80Ω, 1.25W	DO-214AC	1d	1a	Gal
G12	-	BZG03-C12	Zener diode	12V±5%, Izt=50mA, Zzt=4Ω, 1.25W	DO-214AC	1d	1a	Gal
G12	-	STPS130U	Si-diode	SBR, 30V, 1A, Vf<0.55V(1A)	DO-214AA	1d	1a	Ste
G120	-	BZG03-C120	Zener diode	120V±5%, Izt=5mA, Zzt=80Ω, 1.25W	DO-214AC	1d	1a	Gal
G13	-	BZG03-C13	Zener diode	13V±5%, Izt=50mA, Zzt=5Ω, 1.25W	DO-214AC	1d	1a	Gal
G130	-	BZG03-C130	Zener diode	130V±5%, Izt=5mA, Zzt=110Ω, 1.25W	DO-214AC	1d	1a	Gal

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
G130	-	STPS130A	Si-diode	SBR, 30V, 1A, Vf<0.55V(1A)	DO-214AC	1d	1a	Ste
G15	-	BZG03-C15	Zener diode	15V±5%, Izt=50mA, Zzt=5Ω, 1.25W	DO-214AC	1d	1a	Gal
G150	-	BZG03-C150	Zener diode	150V±5%, Izt=5mA, Zzt=130Ω, 1.25W	DO-214AC	1d	1a	Gal
G16	-	BZG03-C16	Zener diode	16V±5%, Izt=25mA, Zzt=6Ω, 1.25W	DO-214AC	1d	1a	Gal
G160	-	BZG03-C160	Zener diode	160V±5%, Izt=5mA, Zzt=150Ω, 1.25W	DO-214AC	1d	1a	Gal
G18	-	BZG03-C18	Zener diode	18V±5%, Izt=25mA, Zzt=6Ω, 1.25W	DO-214AC	1d	1a	Gal
G180	-	BZG03-C180	Zener diode	180V±5%, Izt=5mA, Zzt=180Ω, 1.25W	DO-214AC	1d	1a	Gal
G2	-	3T072AA	Thy-SPD	Vdrm=65V, Vs=88V, Ipp=35A, 60pF	DO-214AA	1d	1a	Mde
G2	-	BA278	PIN-diode	VHF-band-Sw, 35V, 100mA, 715mW, 1.2pF, 0.7Ω(2mA/100MHz)	SOD-523	6d	1a	Phi
G2	-	BZD27C75P	Zener diode	70..79V, Zzt=30Ω, Izt=10mA, 1W	SOD-123FL	7d	2u	Tsc
G2	-	BZD27C75P	Zener diode	70..79V, Zzt=30Ω, Izt=10mA, 800mW	SOD-123FL	7d	1i	Vs
G2	-	CZRV5227B-G	Zener diode	3.42..3.78V, Zzt=24Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
G2	-	CZRW5227B-G	Zener diode	3.42..3.78V, Zzt=24Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
G2	-	FRS2B	Si-diode	Rectifier, Fast-Recovery 100V, 1.5A, <250ns	DO-214AA	1d	2j	Fag
G2	-	MMSZ5227B	Zener diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 500mW	SOD-123	5d	1d	Di
G2	-	MMSZ5227BS	Zener diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 200mW	SOD-323	5d	1d	Di
G2	-	P0720SAA	Thy-SPD	Vdrm=65V, Vs=88V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Mde
G2	-	SS1020FL	Si-diode	SBR, 20V, 1A, Vf<0.55V(1A)	SOD-123FL	7d	1a	Pjt
G2	ag	MMSZ5227B	Zener diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 500mW	SOD-123	5d	1d	Di
G20	-	BZG03-C20	Zener diode	20V±5%, Izt=25mA, Zzt=6Ω, 1.25W	DO-214AC	1d	1a	Gal
G200	-	BZG03-C200	Zener diode	200V±5%, Izt=5mA, Zzt=200Ω, 1.25W	DO-214AC	1d	1a	Gal
G22	-	BZG03-C22	Zener diode	22V±5%, Izt=25mA, Zzt=6Ω, 1.25W	DO-214AC	1d	1a	Gal
G220	-	BZG03-C220	Zener diode	220V±5%, Izt=2mA, Zzt=350Ω, 1.25W	DO-214AC	1d	1a	Gal
G24	-	BZG03-C24	Zener diode	24V±5%, Izt=25mA, Zzt=7Ω, 1.25W	DO-214AC	1d	1a	Gal
G240	-	BZG03-C240	Zener diode	270V±5%, Izt=2mA, Zzt=400Ω, 1.25W	DO-214AC	1d	1a	Gal
G27	-	BZG03-C27	Zener diode	27V±5%, Izt=25mA, Zzt=7Ω, 1.25W	DO-214AC	1d	1a	Gal
G270	-	BZG03-C270	Zener diode	270V±5%, Izt=2mA, Zzt=450Ω, 1.25W	DO-214AC	1d	1a	Gal
G3	-	1PS79SB31	Si-diode	SBD, U-Speed, 30V, 200mA, <25pF	SOD-523	6d	1a	Phi
G3	-	3T080AA	Thy-SPD	Vdrm=75V, Vs=98V, Ipp=35A, 60pF	DO-214AA	1d	1a	Mde
G3	-	BZD27C82P	Zener diode	77..87V, Zzt=30Ω, Izt=10mA, 800mW	SOD-123FL	7d	1i	Vs
G3	-	CZRV5228B-G	Zener diode	3.71..4.1V, Zzt=23Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
G3	-	CZRW5228B-G	Zener diode	3.71..4.10V, Zzt=23Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
G3	-	FRS2D	Si-diode	Rectifier, Fast-Recovery 200V, 1.5A, <250ns	DO-214AA	1d	2j	Fag
G3	-	MMSZ5228B	Zener diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 500mW	SOD-123	5d	1d	Di
G3	-	MMSZ5228BS	Zener diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 200mW	SOD-323	5d	1d	Di
G3	-	P0800SAA	Thy-SPD	Vdrm=75V, Vs=98V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Mde
G3	-	PZU2.4B	Zener diode	2.3..2.6V, Zzt=100Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
G3	-	RKZ9.1B2KK	Zener diode	8.85..9.2V, Izt=5mA, Zzt=30Ω, 150mW	SFP	7d	1a	Ren
G3	-	RKZ9.1B2KL	Zener diode	8.85..9.23V, Izt=5mA, Zzt=30Ω, 100mW	EFP	7d	1a	Ren
G3	-	SS1030	Si-diode	SBR, 30V, 1A, Vf<0.48V(1A)	SOD-123	5d	1a	Pjt
G3	-	SS1030FL	Si-diode	SBR, 30V, 1A, Vf<0.55V(1A)	SOD-123FL	7d	1a	Pjt
G3	ag	MMSZ5228B	Zener diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 500mW	SOD-123	5d	1d	Di
G30	-	BZG03-C30	Zener diode	30V±5%, Izt=25mA, Zzt=8Ω, 1.25W	DO-214AC	1d	1a	Gal
G33	-	BZG03-C33	Zener diode	33V±5%, Izt=25mA, Zzt=8Ω, 1.25W	DO-214AC	1d	1a	Gal
G36	-	BZG03-C36	Zener diode	36V±5%, Izt=10mA, Zzt=21Ω, 1.25W	DO-214AC	1d	1a	Gal
G36	-	STPS3L60U	Si-diode	SBR, 60V, 3A, Vf<0.59V(3A)	DO-214AA	5d	1a	Ste
G39	-	BZG03-C39	Zener diode	39V±5%, Izt=10mA, Zzt=21Ω, 1.25W	DO-214AC	1d	1a	Gal
G4	-	3T110AA	Thy-SPD	Vdrm=90V, Vs=130V, Ipp=35A, 60pF	DO-214AA	1d	1a	Mde
G4	-	BZD27C91P	Zener diode	85..96V, Zzt=60Ω, Izt=5mA, 800mW	SOD-123FL	7d	1i	Vs
G4	-	CZRV5229B-G	Zener diode	4.09..4.52V, Zzt=22Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
G4	-	CZRW5229B-G	Zener diode	4.09..4.52V, Zzt=22Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
G4	-	FRS2G	Si-diode	Rectifier, Fast-Recovery 400V, 1.5A, <250ns	DO-214AA	1d	2j	Fag
G4	-	MMSZ5229B	Zener diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 500mW	SOD-123	5d	1d	Di
G4	-	MMSZ5229BS	Zener diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOD-323	5d	1d	Di
G4	-	P1100SAA	Thy-SPD	Vdrm=90V, Vs=130V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Mde
G4	-	PZU2.7B	Zener diode	2.5..2.9V, Zzt=100Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
G4	-	SS1040FL	Si-diode	SBR, 40V, 1A, Vf<0.55V(1A)	SOD-123FL	7d	1a	Pjt
G4	ag	MMSZ5229B	Zener diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 500mW	SOD-123	5d	1d	Di
G43	-	BZG03-C43	Zener diode	43V±5%, Izt=10mA, Zzt=24Ω, 1.25W	DO-214AC	1d	1a	Gal
G47	-	BZG03-C47	Zener diode	47V±5%, Izt=10mA, Zzt=24Ω, 1.25W	DO-214AC	1d	1a	Gal
G5	-	3T130AA	Thy-SPD	Vdrm=120V, Vs=160V, Ipp=35A, 40pF	DO-214AA	1d	1a	Mde
G5	-	BZD27C100P	Zener diode	94..106V, Zzt=60Ω, Izt=4mA, 1W	SOD-123FL	7d	2u	Tsc
G5	-	BZD27C100P	Zener diode	94..106V, Zzt=60Ω, Izt=5mA, 800mW	SOD-123FL	7d	1i	Vs
G5	-	BZX584B11V	Zener diode	10.78..11.22V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523FL	7d	1a	Tac
G5	-	CZRV5230B-G	Zener diode	4.47..4.94V, Zzt=19Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
G5	-	CZRW5230B-G	Zener diode	4.47..4.94V, Zzt=19Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
G5	-	FRS2J	Si-diode	Rectifier, Fast-Recovery 600V, 1.5A, <250ns	DO-214AA	1d	2j	Fag
G5	-	MM5Z11VB	Zener diode	10.78..11.22V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523FL	7d	1a	Tac
G5	-	MMSZ5230B	Zener diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 500mW	SOD-123	5d	1d	Di
G5	-	MMSZ5230BS	Zener diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 200mW	SOD-323	5d	1d	Di

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
G5	-	P1300SAA	Thy-SPD	Vdrm=120V, Vs=160V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Mde
G5	-	PZU3.0B	Zener diode	2.8..3.2V, Zzt=95Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
G5	-	SS1040	Si-diode	SBR, 40V, 1A, Vf<0.55V(1A)	SOD-123	5d	1a	Pjt
G5	ag	MMSZ5230B	Zener diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 500mW	SOD-123	5d	1d	Di
G51	-	BZG03-C51	Zener diode	51V±5%, Izt=10mA, Zzt=25Ω, 1.25W	DO-214AC	1d	1a	Gal
G56	-	BZG03-C56	Zener diode	56V±5%, Izt=10mA, Zzt=25Ω, 1.25W	DO-214AC	1d	1a	Gal
G6	-	3T150AA	Thy-SPD	Vdrm=140V, Vs=180V, Ipp=35A, 40pF	DO-214AA	1d	1a	Mde
G6	-	BZD27C110P	Zener diode	104..116V, Zzt=80Ω, Izt=5mA, 800mW	SOD-123FL	7d	1i	Vs
G6	-	FRS2K	Si-diode	Rectifier, Fast-Recovery 800V, 1.5A, <250ns	DO-214AA	1d	2j	Fag
G6	-	P1500SAA	Thy-SPD	Vdrm=140V, Vs=180V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Mde
G6	-	PZU3.3B	Zener diode	3.1..3.5V, Zzt=95Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
G6	-	RKZ10B2KK	Zener diode	9.77..10.21V, Izt=5mA, Zzt=30Ω, 150mW	SFP	7d	1a	Ren
G6	-	RKZ10B2KL	Zener diode	9.77..10.21V, Izt=5mA, Zzt=30Ω, 100mW	EFP	7d	1a	Ren
G6	-	SS1060FL	Si-diode	SBR, 60V, 1A, Vf<0.70V(1A)	SOD-123FL	7d	1a	Pjt
G62	-	BZG03-C62	Zener diode	62V±5%, Izt=10mA, Zzt=25Ω, 1.25W	DO-214AC	1d	1a	Gal
G68	-	BZG03-C68	Zener diode	68V±5%, Izt=10mA, Zzt=25Ω, 1.25W	DO-214AC	1d	1a	Gal
G7	-	3T180AA	Thy-SPD	Vdrm=160V, Vs=220V, Ipp=35A, 40pF	DO-214AA	1d	1a	Mde
G7	-	BZD27C120P	Zener diode	114..127V, Zzt=150Ω, Izt=4mA, 1W	SOD-123FL	7d	2u	Tsc
G7	-	BZD27C120P	Zener diode	114..127V, Zzt=80Ω, Izt=5mA, 800mW	SOD-123FL	7d	1i	Vs
G7	-	FRS2M	Si-diode	Rectifier, Fast-Recovery 1000V, 1.5A, <250ns	DO-214AC	1d	2j	Fag
G7	-	P1800SAA	Thy-SPD	Vdrm=160V, Vs=220V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Mde
G7	-	PZU3.6B	Zener diode	3.4..3.8V, Zzt=90Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
G75	-	BZG03-C75	Zener diode	75V±5%, Izt=10mA, Zzt=30Ω, 1.25W	DO-214AC	1d	1a	Gal
G8	-	3T230AA	Thy-SPD	Vdrm=190V, Vs=260V, Ipp=35A, 30pF	DO-214AA	1d	1a	Mde
G8	-	BZD27C130P	Zener diode	124..141V, Zzt=110Ω, Izt=5mA, 800mW	SOD-123FL	7d	1i	Vs
G8	-	BZT52C4V7WT	Zener diode	4.47..4.94V, Izt=5mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Ttr
G8	-	MM5Z4V7	Zener diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Eic
G8	-	MM5Z4V7H	Zener diode	4.4..5V, Izt=5mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Zow
G8	-	P2300SAA	Thy-SPD	Vdrm=190V, Vs=260V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Mde
G8	-	PZU3.9B	Zener diode	3.7..4.1V, Zzt=90Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
G82	-	BZG03-C82	Zener diode	82V±5%, Izt=10mA, Zzt=30Ω, 1.25W	DO-214AC	1d	1a	Gal
G9	-	3T260AA	Thy-SPD	Vdrm=220V, Vs=300V, Ipp=35A, 30pF	DO-214AA	1d	1a	Mde
G9	-	BZD27C150P	Zener diode	138..156V, Zzt=130Ω, Izt=5mA, 800mW	SOD-123FL	7d	1i	Vs
G9	-	BZT52C56WT	Zener diode	52..60V, Izt=1mA, 200mW	SOD-523	6d	1a	Ttr
G9	-	MM5Z56H	Zener diode	52..60V, Izt=1mA, Zzt=200Ω, 200mW	SOD-523	6d	1a	Zow
G9	-	MM5Z56V	Zener diode	56V±5%, Izt=2mA, Zzt=200Ω, 200mW	SOD-523	6d	1a	Eic
G9	-	P2600SAA	Thy-SPD	Vdrm=220V, Vs=300V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Mde
G9	-	PZU4.3B	Zener diode	4.01..4.48V, Zzt=90Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
G9	-	RKZ11B2KK	Zener diode	10.76..11.22V, Izt=5mA, Zzt=30Ω, 150mW	SFP	7d	1a	Ren
G9	-	RKZ11B2KL	Zener diode	10.76..11.22V, Izt=5mA, Zzt=30Ω, 100mW	EFP	7d	1a	Ren
G91	-	BZG03-C91	Zener diode	91V±5%, Izt=5mA, Zzt=60Ω, 1.25W	DO-214AC	1d	1a	Gal
GA	-	3T310AA	Thy-SPD	Vdrm=275V, Vs=350V, Ipp=35A, 30pF	DO-214AA	1d	1a	Mde
GA	-	GF1A	Si-diode	Rectifier, 50V, 1A, Vf<1.1V(1A), 2µs	DO-214BA	1d	1k	Vs
GA	-	P3100SAA	Thy-SPD	Vdrm=275V, Vs=350V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Mde
GA	-	PZU4.7B	Zener diode	4.42..4.9V, Zzt=80Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GA	-	S1GA	Si-diode	Rectifier, 400V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1k	Vs
GA6	-	STPS160A	Si-diode	SBR, 60V, 1A, Vf<0.55V(1A)	DO-214AC	1d	1a	Ste
GB	-	3T350AA	Thy-SPD	Vdrm=300V, Vs=400V, Ipp=35A, 30pF	DO-214AA	1d	1a	Mde
GB	-	GF1B	Si-diode	Rectifier, 100V, 1A, Vf<1.1V(1A), 2µs	DO-214BA	1d	1k	Vs
GB	-	KDZ3.6B	Zener diode	3.6V±2.5%, 40mA, 1W	PMDU	7d	1s	Rhm
GB	-	P3500SAA	Thy-SPD	Vdrm=300V, Vs=400V, Ipp=35A(1ms), Bidir.	DO-214AC	1ba	1j	Mde
GB	-	PZU5.1B	Zener diode	4.84..5.37V, Zzt=60Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GB4	-	STPS1L140A	Si-diode	SBR, 40V, 1A, Vf<0.42V(1A)	DO-214AC	1d	1a	Ste
GB6	-	STPS1L60A	Si-diode	SBR, 60V, 1A, Vf<0.56V(1A)	DO-214AC	1d	1a	Ste
GBA	-	SMCJ60CA	TVS	Vrwm=60V, Vbr=66.7..76.7V, 15.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
GBB	-	SMCJ70CA	TVS	Vrwm=70V, Vbr=77.8..89.5V, 13.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
GBE	-	SMCJ85CA	TVS	Vrwm=85V, Vbr=94.4..108.2V, 11.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
GBG	-	SMCJ100CA	TVS	Vrwm=100V, Vbr=111..123V, 9.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
GBI	-	SMCJ130CA	TVS	Vrwm=130V, Vbr=144..165.5V, 7.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
GBL	-	SMCJ154CA	TVS	Vrwm=154V, Vbr=168..193.5V, 6.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
GBM	-	SMCJ170CA	TVS	Vrwm=170V, Vbr=189..217V, 5.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
GBN	-	SMCJ188CA	TVS	Vrwm=188V, Vbr=209..255V, 4.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
GC	-	3T064A	Thy-SPD	Vdrm=58V, Vs=77V, Ipp=50A, 60pF	DO-214AA	1d	1a	Mde
GC	-	P0640SA	Thy-SPD	Vdrm=58V, Vs=77V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GC	-	PZU5.6B	Zener diode	5.31..5.92V, Zzt=40Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GC4	-	STPS1L140U	Si-diode	SBR, 40V, 1A, Vf<0.42V(1A)	DO-214AA	1d	1a	Ste
GCL	-	3T064ALC	Thy-SPD	Vdrm=58V, Vs=77V, Ipp=2.2A(1ms), 60pF	DO-214AA	1d	1a	Lfr
GD	-	3T072A	Thy-SPD	Vdrm=65V, Vs=88V, Ipp=50A, 60pF	DO-214AA	1d	1a	Mde
GD	-	GF1D	Si-diode	Rectifier, 200V, 1A, Vf<1.1V(1A), 2µs	DO-214BA	1d	1k	Vs
GD	-	KDZ36B	Zener diode	36V±2.5%, 10mA, 1W	PMDU	7d	1s	Rhm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
GD	-	P0720SA	Thy-SPD	Vdrm=65V, Vs=88V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GD	-	P4SMAJ220	TVS	Vrwm=220V, 1A, 400W (1ms)	DO-214AC	1d	1a	Pjt
GD	-	PZU6.2B	Zener diode	5.86..6.53V, Zzt=30Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GD	-	Z2SMB7V5	Zener diode	7.5V±5%, Izt=100mA, 2W	DO-214AA	1d	2j	Fag
GDD	-	1.5SMCJ5.0	TVS	Vrwm=5V, 156.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDD	-	1SMC5.0	TVS	Vbr=6.40..7.07V, Vrwm=5.0V, 156.2A, 1500W(1ms)	403-01	3d	1a	Mot
GDD	-	SMCG5.0	TVS	Vrwm=5V, 156.3A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDD	-	SMCJ5.0	TVS	Vrwm=5V, Vbr=6.4..7.25V, 156.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDD	-	SMCJ5.0C	TVS	Vrwm=5V, Vbr=6.40..7.82V, 156.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDD	-	TV15C5V0K-G	TVS	Vrwm=5.0V, Vbr=6.40..7.82V, Ipp=156.25A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDE	-	1.5SMC6.8A	TVS	Vrwm=5.8V, Vbr=6.45..7.14 V, Ipp=143A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GDE	-	1.5SMCJ5.0A	TVS	Vrwm=5V, 163A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDE	-	1SMC5.0A	TVS	Vbr=6.40..7.07V, Vrwm=5.0V, 163.0A, 1500W(1ms)	403-01	3d	1a	Mot
GDE	-	1SMC5.0AT3	TVS	Vbr=6.40..7.07V, Vrwm=5.0V, 163.0A, 1500W(1ms)	403	3d	1s	Ons
GDE	-	5.0SMC6V8A	Zener diode	6.40..7.25V, Zzt=1Ω, Izt=175mA, 5W	DO-214AB	1d	1b	Rul
GDE	-	CD214C-T5.0A	TVS	Vrwm=5V, Irsm=163A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GDE	-	SMCG5.0A	TVS	Vrwm=5V, 163A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDE	-	SMCJ5.0A	TVS	Vrwm=5V, Vbr=6.4..7.25V, 163A, 1500W(1mS)	DO-214AB	1d	1m	Di
GDE	-	SMCJ5.0A	TVS	Vrwm=5V, Vbr=6.4..7.25V, 163A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDE	-	SMCJ5.0CA	TVS	Vrwm=5V, Vbr=6.40..7.25V, 163.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDE	-	TV15C5V0J-G	TVS	Vrwm=5.0V, Vbr=6.40..7.07V, Ipp=163.04A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDE7	-	SM15T6V8A	TVS	Vrwm=5.8V, Vbr=6.45..7.14V, 143A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDE7	-	SM15T6V8CA	TVS	Vrwm=5.8V, Vbr=6.45..7.14V, 143A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
GDF	-	1.5SMCJ6.0	TVS	Vrwm=6V, 131.6A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDF	-	1SMC6.0	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 131.6A, 1500W(1ms)	403-01	3d	1a	Mot
GDF	-	SMCG6.0	TVS	Vrwm=6V, 131.6A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDF	-	SMCJ6.0	TVS	Vrwm=6V, Vbr=6.67..7.67V, 131.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDF	-	SMCJ6.0C	TVS	Vrwm=6V, Vbr=6.67..8.15V, 131.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDF	-	TV15C6V0K-G	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, Ipp=131.58A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDG	-	1.5SMCJ6.0A	TVS	Vrwm=6V, 145.6A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDG	-	1SMC6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 145.6A, 1500W(1ms)	403-01	3d	1a	Mot
GDG	-	1SMC6.0AT3	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 145.6A, 1500W(1ms)	403	3d	1s	Ons
GDG	-	CD214C-T6.0A	TVS	Vrwm=6V, Irsm=145.6A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GDG	-	SMCG6.0A	TVS	Vrwm=6V, 145.6A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDG	-	SMCJ6.0A	TVS	Vrwm=6V, Vbr=6.67..7.67V, 145.6A, 1500W(1mS)	DO-214AB	1d	1m	Di
GDG	-	SMCJ6.0A	TVS	Vrwm=6V, Vbr=6.67..7.67V, 145.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDG	-	SMCJ6.0CA	TVS	Vrwm=6V, Vbr=6.67..7.37V, 145.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDG	-	TV15C130J-G	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=69.77A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDG	-	TV15C6V0J-G	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=145.63A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDH	-	1.5SMCJ6.5	TVS	Vrwm=6.5V, 122A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDH	-	1SMC6.5	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 122.0A, 1500W(1ms)	403-01	3d	1a	Mot
GDH	-	SMCG6.5	TVS	Vrwm=6.5V, 122A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDH	-	SMCJ6.5	TVS	Vrwm=6.5V, Vbr=7.22..8.3V, 122A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDH	-	SMCJ6.5C	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, 122.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDH	-	TV15C6V5K-G	TVS	Vrwm=6.50V, Vbr=7.22..8.82V, Ipp=121.95A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDI	-	1SMC8.5AT3	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 104.2A, 1500W(1ms)	403	3d	1s	Ons
GDJ	-	1.5SMC120	TVS	Vrwm=97.2V, Vbr=108..132V, Ipp=8.7A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
GDK	-	1.5SMC7.5A	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=132A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GDK	-	1.5SMCJ6.5A	TVS	Vrwm=6.5V, 133.9A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDK	-	1SMC6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 133.9A, 1500W(1ms)	403-01	3d	1a	Mot
GDK	-	1SMC6.5AT3	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 133.9A, 1500W(1ms)	403	3d	1s	Ons
GDK	-	5.0SMC7V5A	Zener diode	7.22..8.30V, Zzt=2Ω, Izt=175mA, 5W	DO-214AB	1d	1b	Rul
GDK	-	CD214C-T6.5A	TVS	Vrwm=6.5V, Irsm=133.9A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GDK	-	SMCG6.5A	TVS	Vrwm=6.5V, 133.9A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDK	-	SMCJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.3V, 133.9A, 1500W(1mS)	DO-214AB	1d	1m	Di
GDK	-	SMCJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.3V, 133.9A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDK	-	SMCJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 133.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDK	-	TV15C6V5J-G	TVS	Vrwm=6.50V, Vbr=7.22..7.98V, Ipp=133.93A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDK7	-	SM15T7V5A	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, 132A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDK7	-	SM15T7V5CA	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, 132A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
GDL	-	1.5SMCJ7.0	TVS	Vrwm=7V, 112.8A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDL	-	1SMC7.0	TVS	Vbr=7.78..8.6V, Vrwm=7.0V, 112.8A, 1500W(1ms)	403-01	3d	1a	Mot
GDL	-	3T072ALC	Thy-SPD	Vdrm=65V, Vs=88V, Ipp=2.2A(1ms), 60pF	DO-214AA	1d	1a	Lfr
GDL	-	SMCG7.0	TVS	Vrwm=7V, 112.8A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDL	-	SMCJ7.0	TVS	Vrwm=7V, Vbr=7.78..8.95V, 112.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDL	-	SMCJ7.0C	TVS	Vrwm=7V, Vbr=7.78..9.51V, 112.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDL	-	TV15C7V0K-G	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=112.78A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDM	-	1.5SMC8.2A	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=124A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GDM	-	1.5SMCJ7.0A	TVS	Vrwm=7V, 125A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDM	-	1SMC7.0A	TVS	Vbr=7.78..8.6V, Vrwm=7.0V, 125.0A, 1500W(1ms)	403-01	3d	1a	Mot

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
GDM	-	1SMC7.0AT3	TVS	Vbr=7.78..8.6V, Vrwm=7.0V, 125.0A, 1500W(1ms)	403	3d	1s	Ons
GDM	-	5.0SMC8V2A	Zener diode	7.78..8.95V, Zzt=2Ω, Izt=150mA, 5W	DO-214AB	1d	1b	Rul
GDM	-	CD214C-T7.0A	TVS	Vrwm=7V, Irsm=125A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GDM	-	SMCG7.0A	TVS	Vrwm=7V, 125A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDM	-	SMCJ7.0A	TVS	Vrwm=7V, Vbr=7.78..8.95V, 125A, 1500W(1mS)	DO-214AB	1d	1m	Di
GDM	-	SMCJ7.0A	TVS	Vrwm=7V, Vbr=7.78..8.95V, 125A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDM	-	SMCJ7.0CA	TVS	Vrwm=7V, Vbr=7.78..8.6V, 125.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDM	-	TV15C7VOJ-G	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=125.0A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDN	-	1.5SMCJ7.5	TVS	Vrwm=7.5V, 104.9A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDN	-	1SMC7.5	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 104.9A, 1500W(1ms)	403-01	3d	1a	Mot
GDN	-	SMCG7.5	TVS	Vrwm=7.5V, 104.9A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDN	-	SMCJ7.5	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 104.9A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDN	-	SMCJ7.5C	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, 104.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDN	-	TV15C7V5K-G	TVS	Vrwm=7.50V, Vbr=8.33..10.20V, Ipp=104.90A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDP	-	1.5SMC9.1A	TVS	Vrwm=7.78V, Vbr=8.65..9.5V, Ipp=112A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GDP	-	1.5SMCJ7.5A	TVS	Vrwm=7.5V, 116.3A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDP	-	1SMC7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 116.3A, 1500W(1ms)	403-01	3d	1a	Mot
GDP	-	1SMC7.5AT3	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 116.3A, 1500W(1ms)	403	3d	1s	Ons
GDP	-	5.0SMC9V1A	Zener diode	8.33..9.58V, Zzt=2Ω, Izt=150mA, 5W	DO-214AB	1d	1b	Rul
GDP	-	CD214C-T7.5A	TVS	Vrwm=7.5V, Irsm=116.3A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GDP	-	SMCG7.5A	TVS	Vrwm=7.5V, 116.3A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDP	-	SMCJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 116.3A, 1500W(1mS)	DO-214AB	1d	1m	Di
GDP	-	SMCJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 116.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDP	-	SMCJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 116.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDP	-	TV15C7V5J-G	TVS	Vrwm=7.50V, Vbr=8.33..9.21V, Ipp=116.28A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDQ	-	1.5SMCJ8.0	TVS	Vrwm=8V, 100A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDQ	-	1SMC8.0	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 100.0A, 1500W(1ms)	403-01	3d	1a	Mot
GDQ	-	SMCG8.0	TVS	Vrwm=8V, 100A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDQ	-	SMCJ8.0	TVS	Vrwm=8V, Vbr=8.89..9.83V, 100A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDQ	-	SMCJ8.0C	TVS	Vrwm=8V, Vbr=8.89..9.83V, 100.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDQ	-	TV15C8V0K-G	TVS	Vrwm=8.0V, Vbr=8.89..10.90V, Ipp=100.0A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDR	-	1.5SMCJ8.0A	TVS	Vrwm=8V, 110.3A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDR	-	1SMC8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 110.3A, 1500W(1ms)	403-01	3d	1a	Mot
GDR	-	1SMC8.0AT3	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 110.3A, 1500W(1ms)	403	3d	1s	Ons
GDR	-	5.0SMC10A	Zener diode	8.89..10.23V, Zzt=2Ω, Izt=125mA, 5W	DO-214AB	1d	1b	Rul
GDR	-	CD214C-T8.0A	TVS	Vrwm=8V, Irsm=110.3A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GDR	-	SMCG8.0A	TVS	Vrwm=8V, 110.3A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDR	-	SMCJ8.0A	TVS	Vrwm=8V, Vbr=8.89..10.23V, 110.3A, 1500W(1mS)	DO-214AB	1d	1m	Di
GDR	-	SMCJ8.0A	TVS	Vrwm=8V, Vbr=8.89..9.83V, 110.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDR	-	SMCJ8.0CA	TVS	Vrwm=8V, Vbr=8.89..9.83V, 110.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDR	-	TV15C8V0J-G	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=110.29A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDS	-	1.5SMCJ8.5	TVS	Vrwm=8.5V, 94.3A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDS	-	1SMC8.5	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 94.3A, 1500W(1ms)	403-01	3d	1a	Mot
GDS	-	SMCG8.5	TVS	Vrwm=8.5V, 94.3A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDS	-	SMCJ8.5	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 94.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDS	-	SMCJ8.5C	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, 94.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDS	-	TV15C8V5K-G	TVS	Vrwm=8.55V, Vbr=9.44..11.50V, Ipp=94.34A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDT	-	1.5SMC10A	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, Ipp=103A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GDT	-	1.5SMCJ8.5A	TVS	Vrwm=8.5V, 104.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDT	-	1SMC8.5A	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 104.2A, 1500W(1ms)	403-01	3d	1a	Mot
GDT	-	CD214C-T8.5A	TVS	Vrwm=8.5V, Irsm=104.2A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GDT	-	SMCG8.5A	TVS	Vrwm=8.5V, 104.2A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDT	-	SMCJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 104.2A, 1500W(1mS)	DO-214AB	1d	1m	Di
GDT	-	SMCJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 104.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDT	-	SMCJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 104.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDT	-	TV15C8V5J-G	TVS	Vrwm=8.55V, Vbr=9.44..10.40V, Ipp=104.17A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDT7	-	SM15T10A	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, 103A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDT7	-	SM15T10CA	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, 103A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
GDU	-	1.5SMCJ9.0	TVS	Vrwm=9V, 88.7A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDU	-	1SMC9.0	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 88.7A, 1500W(1ms)	403-01	3d	1a	Mot
GDU	-	SMCG9.0	TVS	Vrwm=9V, 88.8A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDU	-	SMCJ9.0	TVS	Vrwm=9V, Vbr=10.0..12.2V, 88.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDU	-	SMCJ9.0C	TVS	Vrwm=9V, Vbr=10.0..12.2V, 88.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDU	-	TV15C9V0K-G	TVS	Vrwm=9.0V, Vbr=10.0..12.20V, Ipp=88.76A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDV	-	1.5SMC11A	TVS	Vrwm=9.4V, Vbr=10.5..11.6V, Ipp=96A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GDV	-	1.5SMCJ9.0A	TVS	Vrwm=9V, 97.4A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDV	-	1SMC9.0A	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 97.4A, 1500W(1ms)	403-01	3d	1a	Mot
GDV	-	1SMC9.0AT3	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 97.4A, 1500W(1ms)	403	3d	1s	Ons
GDV	-	5.0SMC11A	Zener diode	10.0..11.50V, Zzt=3Ω, Izt=125mA, 5W	DO-214AB	1d	1b	Rul
GDV	-	CD214C-T9.0A	TVS	Vrwm=9V, Irsm=97.4A, 1500W(1ms)	DO-214AB	1d	1a	Brn

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
GDV	-	SMCG9.0A	TVS	Vrwm=9V, 97.4A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDV	-	SMCJ9.0A	TVS	Vrwm=9V, Vbr=10..11.5V, 97.4A, 1500W(1mS)	DO-214AB	1d	1k	Vs
GDV	-	SMCJ9.0A	TVS	Vrwm=9V, Vbr=10..11.5V, 97.4A, 1500W(1mS)	DO-214AB	1d	1m	Di
GDV	-	SMCJ9.0CA	TVS	Vrwm=9V, Vbr=10..11.5V, 97.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Eic
GDV	-	TV15C9V0J-G	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=97.40A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDW	-	1.5SMCJ10	TVS	Vrwm=10V, 79.8A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDW	-	1SMC10	TVS	Vbr=11.1..12.3V, Vrwm=10V, 79.8A, 1500W(1ms)	403-01	3d	1a	Mot
GDW	-	SMCG10	TVS	Vrwm=10V, 79.8A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDW	-	SMCJ10	TVS	Vrwm=10V, Vbr=11.1..13.6V, 79.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDW	-	SMCJ10C	TVS	Vrwm=10V, Vbr=11.1..13.6V, 98A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDW	-	TV15C100K-G	TVS	Vrwm=10.0V, Vbr=11.10..13.60 V, Ipp=79.79A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDX	-	1.5SMC12A	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, Ipp=90A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GDX	-	1.5SMCJ10A	TVS	Vrwm=10V, 88.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDX	-	1SMC10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, 88.2A, 1500W(1ms)	403-01	3d	1a	Mot
GDX	-	1SMC10AT3	TVS	Vbr=11.1..12.3V, Vrwm=10V, 88.2A, 1500W(1ms)	403	3d	1s	Ons
GDX	-	5.0SMC12A	Zener diode	11.0..12.80V, Zzt=3Ω, Izt=100mA, 5W	DO-214AB	1d	1b	Rul
GDX	-	CD214C-T10A	TVS	Vrwm=10V, Irsm=88.2A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GDX	-	SMCG10A	TVS	Vrwm=10V, 88.2A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDX	-	SMCJ10A	TVS	Vrwm=10V, Vbr=11.1..12.8V, 88.2A, 1500W(1mS)	DO-214AB	1d	1m	Di
GDX	-	SMCJ10A	TVS	Vrwm=10V, Vbr=11.1..13.6V, 88.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDX	-	SMCJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.8V, 88.2A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Eic
GDX	-	TV15C100J-G	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=88.24A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDX7	-	SM15T12A	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, 90A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDX7	-	SM15T12CA	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, 90A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
GDY	-	1.5SMCJ11	TVS	Vrwm=11V, 74.6A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDY	-	1SMC11	TVS	Vbr=12.2..13.5V, Vrwm=11V, 74.6A, 1500W(1ms)	403-01	3d	1a	Mot
GDY	-	SMCG11	TVS	Vrwm=11V, 74.6A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDY	-	SMCJ11	TVS	Vrwm=11V, Vbr=12.2..14V, 74.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDY	-	SMCJ11C	TVS	Vrwm=11V, Vbr=12.2..14.9V, 74.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GDY	-	TV15C110K-G	TVS	Vrwm=11.0V, Vbr=12.20..14.90V, Ipp=74.63A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GDZ	-	1.5SMC13A	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, Ipp=82A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GDZ	-	1.5SMCJ11A	TVS	Vrwm=11V, 82.4A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GDZ	-	1SMC11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, 82.4A, 1500W(1ms)	403-01	3d	1a	Mot
GDZ	-	1SMC11AT3	TVS	Vbr=12.2..13.5V, Vrwm=11V, 82.4A, 1500W(1ms)	403	3d	1s	Ons
GDZ	-	5.0SMC13A	Zener diode	12.20..14.0V, Zzt=3Ω, Izt=100mA, 5W	DO-214AB	1d	1b	Rul
GDZ	-	CD214C-T11A	TVS	Vrwm=11V, Irsm=82.4A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GDZ	-	SMCG11A	TVS	Vrwm=11V, 82.4A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GDZ	-	SMCJ11A	TVS	Vrwm=11V, Vbr=12.2..14.9V, 82.4A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GDZ	-	SMCJ11A	TVS	Vrwm=11V, Vbr=12.2..14V, 82.4A, 1500W(1mS)	DO-214AB	1d	1m	Di
GDZ	-	SMCJ11CA	TVS	Vrwm=11V, Vbr=12.2..14V, 82.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Eic
GDZ	-	TV15C110J-G	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=82.42A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GE	-	3T080A	Thy-SPD	Vdrm=75V, Vs=98V, Ipp=50A, 60pF	DO-214AA	1d	1a	Mde
GE	-	P0800SA	Thy-SPD	Vdrm=75V, Vs=98V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GE	-	P4SMAJ220A	TVS	Vrwm=220V, 1A, 400W (1ms)	DO-214AC	1d	1a	Pjt
GE	-	PZU6.8B	Zener diode	6.47..7.14V, Zzt=20Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GE	-	Z2SMB6V8	Zener diode	6.8V±5%, Izt=100mA, 2W	DO-214AA	1d	2j	Fag
GEA	-	TV15C190K-G	TVS	Vrwm=19.0V, Vbr=21.13..25.76V, Ipp=44.10A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GEB	-	TV15C190J-G	TVS	Vrwm=19.0V, Vbr=21.10..23.30V, Ipp=48.73A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GED	-	1.5SMCJ12	TVS	Vrwm=12V, 68.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GED	-	1SMC12	TVS	Vbr=13.3..14.7V, Vrwm=12V, 68.2A, 1500W(1ms)	403-01	3d	1a	Mot
GED	-	SMCG12	TVS	Vrwm=12V, 68.2A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GED	-	SMCJ12	TVS	Vrwm=12V, Vbr=13.3..15.3V, 68.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GED	-	SMCJ12C	TVS	Vrwm=12V, Vbr=13.3..16.3V, 68.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GED	-	TV15C120K-G	TVS	Vrwm=12V, Vbr=13.30..16.30V, Ipp=68.18A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GEE	-	1.5SMCJ12A	TVS	Vrwm=12V, 75.3A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GEE	-	1SMC12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, 75.4A, 1500W(1ms)	403-01	3d	1a	Mot
GEE	-	1SMC12AT3	TVS	Vbr=13.3..14.7V, Vrwm=12V, 75.4A, 1500W(1ms)	403	3d	1s	Ons
GEE	-	5.0SMC14A	Zener diode	13.30..15.30V, Zzt=3Ω, Izt=100mA, 5W	DO-214AB	1d	1b	Rul
GEE	-	CD214C-T12A	TVS	Vrwm=12V, Irsm=75.3A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GEE	-	SMCG12A	TVS	Vrwm=12V, 75.4A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GEE	-	SMCJ12A	TVS	Vrwm=12V, Vbr=13.3..15.3V, 75.3A, 1500W(1mS)	DO-214AB	1d	1m	Di
GEE	-	SMCJ12A	TVS	Vrwm=12V, Vbr=13.3..15.3V, 75.4A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEE	-	SMCJ12CA	TVS	Vrwm=12V, Vbr=13.3..15.3V, 75.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Eic
GEE	-	TV15C120J-G	TVS	Vrwm=12V, Vbr=13.30..14.70V, Ipp=75.38A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GEF	-	1.5SMCJ13	TVS	Vrwm=13V, 63A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GEF	-	1SMC13	TVS	Vbr=14.4..15.9V, Vrwm=13V, 63.0A, 1500W(1ms)	403-01	3d	1a	Mot
GEF	-	SMCG13	TVS	Vrwm=13V, 63.A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GEF	-	SMCJ13	TVS	Vrwm=13V, Vbr=14.4..16.5V, 63.A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEF	-	SMCJ13C	TVS	Vrwm=13V, Vbr=14.4..16.5V, 63.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GEF	-	TV15C130K-G	TVS	Vrwm=13.0V, Vbr=14.40..17.60V, Ipp=63.03A, 1500W(1ms)	DO-214AB	1d	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
GEG	-	1.5SMC15A	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, Ipp=71A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GEG	-	1.5SMCJ13A	TVS	Vrwm=13V, 69.7A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GEG	-	1SMC13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, 69.8A, 1500W(1ms)	403-01	3d	1a	Mot
GEG	-	1SMC13AT3	TVS	Vbr=14.4..15.9V, Vrwm=13V, 69.8A, 1500W(1ms)	403	3d	1s	Ons
GEG	-	5.0SMC15A	Zener diode	14.40..16.50V, Zzt=3Ω, Izt=75mA, 5W	DO-214AB	1d	1b	Rul
GEG	-	CD214C-T13A	TVS	Vrwm=13V, Irsm=69.7A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GEG	-	SMCG13A	TVS	Vrwm=13V, 69.8A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GEG	-	SMCJ13A	TVS	Vrwm=13V, Vbr=14.4..16.5V, 69.7A, 1500W(1mS)	DO-214AB	1d	1m	Di
GEG	-	SMCJ13A	TVS	Vrwm=13V, Vbr=14.4..16.5V, 69.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEG	-	SMCJ13CA	TVS	Vrwm=13V, Vbr=14.4..16.5V, 69.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GEG7	-	SM15T15A	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, 71A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEG7	-	SM15T15CA	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, 71A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
GEH	-	1.5SMCJ14	TVS	Vrwm=14V, 58.1A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GEH	-	1SMC14	TVS	Vbr=15.6..17.2V, Vrwm=14V, 58.1A, 1500W(1ms)	403-01	3d	1a	Mot
GEH	-	SMCG14	TVS	Vrwm=14V, 58.1A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GEH	-	SMCJ14	TVS	Vrwm=14V, Vbr=15.6..19.1V, 58.1A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEH	-	SMCJ14C	TVS	Vrwm=14V, Vbr=15.6..19.1V, 58.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GEH	-	TV15C140K-G	TVS	Vrwm=14.0V, Vbr=15.60..19.10V, Ipp=58.14A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GEJ	-	1.5SMC120A	TVS	Vrwm=102V, Vbr=114..126V, Ipp=9.1A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
GEK	-	1.5SMC16A	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, Ipp=67A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GEK	-	1.5SMCJ14A	TVS	Vrwm=14V, 64.7A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GEK	-	1SMC14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, 64.7A, 1500W(1ms)	403-01	3d	1a	Mot
GEK	-	1SMC14AT3	TVS	Vbr=15.6..17.2V, Vrwm=14V, 64.7A, 1500W(1ms)	403	3d	1s	Ons
GEK	-	5.0SMC16A	Zener diode	15.60..17.90V, Zzt=3Ω, Izt=75mA, 5W	DO-214AB	1d	1b	Rul
GEK	-	CD214C-T14A	TVS	Vrwm=14V, Irsm=64.7A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GEK	-	SMCG14A	TVS	Vrwm=14V, 64.7A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GEK	-	SMCJ14A	TVS	Vrwm=14V, Vbr=15.6..17.9V, 64.7A, 1500W(1mS)	DO-214AB	1d	1m	Di
GEK	-	SMCJ14A	TVS	Vrwm=14V, Vbr=15.6..19.1V, 64.7A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEK	-	SMCJ14CA	TVS	Vrwm=14V, Vbr=15.6..17.9V, 64.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GEK	-	TV15C140J-G	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=64.66A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GEL	-	1.5SMCJ15	TVS	Vrwm=15V, 55.8A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GEL	-	1SMC15	TVS	Vbr=16.7..18.5V, Vrwm=15V, 55.8A, 1500W(1ms)	403-01	3d	1a	Mot
GEL	-	3T080ALC	Thy-SPD	Vdrm=75V, Vs=98V, Ipp=2.2A(1ms), 60pF	DO-214AA	1d	1a	Lfr
GEL	-	SMCG15	TVS	Vrwm=15V, 55.8A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GEL	-	SMCJ15	TVS	Vrwm=15V, Vbr=16.7..19.2V, 55.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEL	-	SMCJ15C	TVS	Vrwm=15V, Vbr=16.7..20.4V, 55.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GEL	-	TV15C150K-G	TVS	Vrwm=15.0V, Vbr=16.70..20.40V, Ipp=55.76A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GEM	-	1.5SMC18A	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, Ipp=59.5A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GEM	-	1.5SMCJ15A	TVS	Vrwm=15V, 61.5A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GEM	-	1SMC15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, 61.5A, 1500W(1ms)	403-01	3d	1a	Mot
GEM	-	1SMC15AT3	TVS	Vbr=16.7..18.5V, Vrwm=15V, 61.5A, 1500W(1ms)	403	3d	1s	Ons
GEM	-	5.0SMC18A	Zener diode	16.70..19.20V, Zzt=3Ω, Izt=65mA, 5W	DO-214AB	1d	1b	Rul
GEM	-	CD214C-T15A	TVS	Vrwm=15V, Irsm=61.5A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GEM	-	SMCG15A	TVS	Vrwm=15V, 61.5A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GEM	-	SMCJ15A	TVS	Vrwm=15V, Vbr=16.7..19.2V, 61.5A, 1500W(1mS)	DO-214AB	1d	1m	Di
GEM	-	SMCJ15A	TVS	Vrwm=15V, Vbr=16.7..19.2V, 61.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEM	-	SMCJ15CA	TVS	Vrwm=15V, Vbr=16.7..19.2V, 61.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GEM	-	TV15C150J-G	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=61.48A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GEM7	-	SM15T18A	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, 59.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEM7	-	SM15T18CA	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, 59.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
GEN	-	1.5SMCJ16	TVS	Vrwm=16V, 52.1A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GEN	-	1SMC16	TVS	Vbr=17.8..19.7V, Vrwm=16V, 52.1A, 1500W(1ms)	403-01	3d	1a	Mot
GEN	-	SMCG16	TVS	Vrwm=16V, 52.1A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GEN	-	SMCJ16	TVS	Vrwm=16V, Vbr=17.8..20.5V, 52.1A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEN	-	SMCJ16C	TVS	Vrwm=16V, Vbr=17.8..21.8V, 52.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GEN	-	TV15C160K-G	TVS	Vrwm=16.0V, Vbr=17.80..21.80V, Ipp=52.08A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GEP	-	1.5SMCJ16A	TVS	Vrwm=16V, 57.7A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GEP	-	1SMC16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, 57.7A, 1500W(1ms)	403-01	3d	1a	Mot
GEP	-	1SMC16AT3	TVS	Vbr=17.8..19.7V, Vrwm=16V, 57.7A, 1500W(1ms)	403	3d	1s	Ons
GEP	-	5.0SMC19A	Zener diode	17.80..20.50V, Zzt=3Ω, Izt=65mA, 5W	DO-214AB	1d	1b	Rul
GEP	-	CD214C-T16A	TVS	Vrwm=16V, Irsm=57.7A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GEP	-	SMCG16A	TVS	Vrwm=16V, 57.7A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GEP	-	SMCJ16A	TVS	Vrwm=16V, Vbr=17.8..20.5V, 57.7A, 1500W(1mS)	DO-214AB	1d	1m	Di
GEP	-	SMCJ16A	TVS	Vrwm=16V, Vbr=17.8..21.8V, 57.7A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEP	-	SMCJ16CA	TVS	Vrwm=16V, Vbr=17.8..19.7V, 57.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GEP	-	TV15C160J-G	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=57.69A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GEQ	-	1.5SMCJ17	TVS	Vrwm=17V, 49.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GEQ	-	1SMC17	TVS	Vbr=18.9..20.9V, Vrwm=17V, 49.2A, 1500W(1ms)	403-01	3d	1a	Mot
GEQ	-	SMCG17	TVS	Vrwm=17V, 49.2A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GEQ	-	SMCJ17	TVS	Vrwm=17V, Vbr=18.9..21.7V, 49.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
GEQ	-	SMCJ17C	TVS	Vrwm=17V, Vbr=18.9..23.1V, 49.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GEQ	-	TV15C170K-G	TVS	Vrwm=17.0V, Vbr=18.90..23.10V, Ipp=49.18A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GER	-	1.5SMC20A	TVS	Vrwm=17.1V, Vbr=19..21V, Ipp=54A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GER	-	1.5SMCJ17A	TVS	Vrwm=17V, 53.3A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GER	-	1SMC17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, 54.3A, 1500W(1ms)	403-01	3d	1a	Mot
GER	-	1SMC17AT3	TVS	Vbr=18.9..20.9V, Vrwm=17V, 54.3A, 1500W(1ms)	403	3d	1s	Ons
GER	-	5.0SMC20A	Zener diode	18.90..21.70V, Zzt=3Ω, Izt=65mA, 5W	DO-214AB	1d	1b	Rul
GER	-	CD214C-T17A	TVS	Vrwm=17V, Irsm=53.3A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GER	-	SMCG17A	TVS	Vrwm=17V, 54.3A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GER	-	SMCJ17A	TVS	Vrwm=17V, Vbr=18.9..21.7V, 53.3A, 1500W(1mS)	DO-214AB	1d	1m	Di
GER	-	SMCJ17A	TVS	Vrwm=17V, Vbr=18.9..21.7V, 54.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GER	-	SMCJ17CA	TVS	Vrwm=17V, Vbr=18.9..21.7V, 54.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GER	-	TV15C170J-G	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=54.35A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GES	-	1.5SMCJ18	TVS	Vrwm=18V, 46.6A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GES	-	1SMC18	TVS	Vbr=20.0..22.1V, Vrwm=18V, 46.6A, 1500W(1ms)	403-01	3d	1a	Mot
GES	-	SMCG18	TVS	Vrwm=18V, 46.6A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GES	-	SMCJ18	TVS	Vrwm=18V, Vbr=20..23.3V, 46.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GES	-	SMCJ18C	TVS	Vrwm=18V, Vbr=20.0..24.4V, 46.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GES	-	TV15C180K-G	TVS	Vrwm=18.0V, Vbr=20.0..24.40V, Ipp=46.58A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GET	-	1.5SMC22A	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, Ipp=49A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GET	-	1.5SMCJ18A	TVS	Vrwm=18V, 51.4A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GET	-	1SMC18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, 51.4A, 1500W(1ms)	403-01	3d	1a	Mot
GET	-	1SMC18AT3	TVS	Vbr=20.0..22.1V, Vrwm=18V, 51.4A, 1500W(1ms)	403	3d	1s	Ons
GET	-	5.0SMC22A	Zener diode	20.0..23.30V, Zzt=4Ω, Izt=50mA, 5W	DO-214AB	1d	1b	Rul
GET	-	CD214C-T18A	TVS	Vrwm=18V, Irsm=51.4A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GET	-	SMCG18A	TVS	Vrwm=18V, 51.4A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GET	-	SMCJ18A	TVS	Vrwm=18V, Vbr=20..23.3V, 51.4A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GET	-	SMCJ18A	TVS	Vrwm=18V, Vbr=20..23.3V, 51.4A, 1500W(1mS)	DO-214AB	1d	1m	Di
GET	-	SMCJ18CA	TVS	Vrwm=18V, Vbr=20.0..22.1V, 51.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GET	-	TV15C180J-G	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=51.37A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GET7	-	SM15T22A	TVS	Vrwm=18.8, Vbr=20.9..23.1V, 49A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GET7	-	SM15T22CA	TVS	Vrwm=18.8, Vbr=20.9..23.1V, 49A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
GEU	-	1.5SMCJ20	TVS	Vrwm=20V, 41.9A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GEU	-	1SMC20	TVS	Vbr=22.2..24.5V, Vrwm=20V, 41.9A, 1500W(1ms)	403-01	3d	1a	Mot
GEU	-	SMCG20	TVS	Vrwm=20V, 41.9A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GEU	-	SMCJ20	TVS	Vrwm=20V, Vbr=22.2..25.5V, 41.9A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEU	-	SMCJ20C	TVS	Vrwm=20V, Vbr=22.2..27.1V, 41.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GEU	-	TV15C200K-G	TVS	Vrwm=20.0V, Vbr=22.20..27.10V, Ipp=41.90A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GEV	-	1.5SMC24A	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, Ipp=45A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GEV	-	1.5SMCJ20A	TVS	Vrwm=20V, 46.3A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GEV	-	1SMC20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, 46.3A, 1500W(1ms)	403-01	3d	1a	Mot
GEV	-	1SMC20AT3	TVS	Vbr=22.2..24.5V, Vrwm=20V, 46.3A, 1500W(1ms)	403	3d	1s	Ons
GEV	-	5.0SMC24A	Zener diode	22.20..25.50V, Zzt=4Ω, Izt=50mA, 5W	DO-214AB	1d	1b	Rul
GEV	-	CD214C-T20A	TVS	Vrwm=20V, Irsm=46.3A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GEV	-	SMCG20A	TVS	Vrwm=20V, 46.3A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GEV	-	SMCJ20A	TVS	Vrwm=20V, Vbr=22.2..25.5V, 46.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEV	-	SMCJ20A	TVS	Vrwm=20V, Vbr=22.2..25.5V, 46.3A, 1500W(1mS)	DO-214AB	1d	1m	Di
GEV	-	SMCJ20CA	TVS	Vrwm=20V, Vbr=22.2..24.5V, 46.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GEV	-	TV15C200J-G	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=46.30A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GEV7	-	SM15T24A	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, 45A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEV7	-	SM15T24CA	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, 45A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
GEW	-	1.5SMCJ22	TVS	Vrwm=22V, 38.1A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GEW	-	1SMC22	TVS	Vbr=24.4..26.9V, Vrwm=22V, 38.1A, 1500W(1ms)	403-01	3d	1a	Mot
GEW	-	SMCG22	TVS	Vrwm=22V, 38.1A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GEW	-	SMCJ22	TVS	Vrwm=22V, Vbr=24.4..28V, 38.1A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEW	-	SMCJ22C	TVS	Vrwm=22V, 24.4..29.8V, 38.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GEW	-	TV15C220K-G	TVS	Vrwm=22.0V, Vbr=24.40..29.80V, Ipp=38.07A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GEX	-	1.5SMC27A	TVS	Vrwm=23.1V, Vbr=25.7..28.4 V, Ipp=40A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GEX	-	1.5SMCJ22A	TVS	Vrwm=22V, 42.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GEX	-	1SMC22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, 42.3A, 1500W(1ms)	403-01	3d	1a	Mot
GEX	-	1SMC22AT3	TVS	Vbr=24.4..26.9V, Vrwm=22V, 42.3A, 1500W(1ms)	403	3d	1s	Ons
GEX	-	5.0SMC27A	Zener diode	24.40..28.0V, Zzt=5Ω, Izt=50mA, 5W	DO-214AB	1d	1b	Rul
GEX	-	CD214C-T22A	TVS	Vrwm=22V, Irsm=42.2A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GEX	-	SMCG22A	TVS	Vrwm=22V, 42.3A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GEX	-	SMCJ22A	TVS	Vrwm=22V, Vbr=24.4..28V, 42.2A, 1500W(1mS)	DO-214AB	1d	1m	Di
GEX	-	SMCJ22A	TVS	Vrwm=22V, Vbr=24.4..28V, 42.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEX	-	SMCJ22CA	TVS	Vrwm=22V, 24.4..26.9V, 42.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GEX	-	TV15C220J-G	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=42.25A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GEX7	-	SM15T27A	TVS	Vrwm=23.1V, Vbr=25.7..28.4V, 40A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEX7	-	SM15T27CA	TVS	Vrwm=23.1V, Vbr=25.7..28.4V, 40A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
GEY	-	1.5SMCJ24	TVS	Vrwm=24V, 34.9A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GEY	-	1SMC24	TVS	Vbr=26.7..29.5V, Vrwm=24V, 38.6A, 1500W(1ms)	403-01	3d	1a	Mot
GEY	-	SMCG24	TVS	Vrwm=24V, 34.9A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GEY	-	SMCJ24	TVS	Vrwm=24V, Vbr=26.7..30.7V, 34.9A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEY	-	SMCJ24C	TVS	Vrwm=24V, Vbr=26.7..32.6V, 34.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GEY	-	TV15C240K-G	TVS	Vrwm=24.0V, Vbr=26.70..32.60V, Ipp=34.88A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GEZ	-	1.5SMCJ24A	TVS	Vrwm=24V, 38.6A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GEZ	-	1SMC24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, 38.6A, 1500W(1ms)	403-01	3d	1a	Mot
GEZ	-	1SMC24AT3	TVS	Vbr=26.7..29.5V, Vrwm=24V, 38.6A, 1500W(1ms)	403	3d	1s	Ons
GEZ	-	5.0SMC28A	Zener diode	26.70..30.70V, Zzt=6Ω, Izt=50mA, 5W	DO-214AB	1d	1b	Rul
GEZ	-	CD214C-T24A	TVS	Vrwm=24V, Irsm=38.6A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GEZ	-	SMCG24A	TVS	Vrwm=24V, 38.6A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GEZ	-	SMCJ24A	TVS	Vrwm=24V, Vbr=26.7..30.7V, 38.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GEZ	-	SMCJ24A	TVS	Vrwm=24V, Vbr=26.7..30.7V, 38.6A, 1500W(1mS)	DO-214AB	1d	1m	Di
GEZ	-	SMCJ24CA	TVS	Vrwm=24V, Vbr=26.7..29.5V, 38.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GEZ	-	TV15C240J-G	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=38.56A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GF	-	3T110A	Thy-SPD	Vdrm=90V, Vs=130V, Ipp=50A, 60pF	DO-214AA	1d	1a	Mde
GF	-	KDZ11FV	Zener diode	10.40..11.60V, Izt=5mA, Zzt=15Ω, 100mW	TFSC	7d	1a	Kec
GF	-	MAZD100	Zener diode	9.4..10.6V, Zzt=30Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
GF	-	P1100SA	Thy-SPD	Vdrm=90V, Vs=130V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GF	-	PZU7.5B	Zener diode	7.06..7.84V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GF	-	T110AB-LC	Thy-SPD	V Of-St=90V, Vs=130V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GF	-	Z2SMB8V2	Zener diode	8.2V±5%, Izt=100mA, 2W	DO-214AA	1d	2j	Fag
GFD	-	1.5SMCJ26	TVS	Vrwm=26V, 32.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFD	-	1SMC26	TVS	Vbr=28.9..31.9V, Vrwm=26V, 32.2A, 1500W(1ms)	403-01	3d	1a	Mot
GFD	-	SMCG26	TVS	Vrwm=26V, 32.2A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFD	-	SMCJ26	TVS	Vrwm=26V, Vbr=28.9..33.2V, 32.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFD	-	SMCJ26C	TVS	Vrwm=26V, Vbr=28.9..35.3V, 32.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFD	-	TV15C260K-G	TVS	Vrwm=26.0V, Vbr=28.90..35.30V, Ipp=32.19A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFE	-	1.5SMC30A	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, Ipp=36A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GFE	-	1.5SMCJ26A	TVS	Vrwm=26V, 35.6A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFE	-	1SMC26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, 35.6A, 1500W(1ms)	403-01	3d	1a	Mot
GFE	-	1SMC26AT3	TVS	Vbr=28.9..31.9V, Vrwm=26V, 35.6A, 1500W(1ms)	403	3d	1s	Ons
GFE	-	5.0SMC30A	Zener diode	28.90..33.20V, Zzt=8Ω, Izt=40mA, 5W	DO-214AB	1d	1b	Rul
GFE	-	CD214C-T26A	TVS	Vrwm=26V, Irsm=35.6A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GFE	-	SMCG26A	TVS	Vrwm=26V, 35.6A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFE	-	SMCJ26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, 35.6A, 1500W(1mS)	DO-214AB	1d	1m	Di
GFE	-	SMCJ26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, 35.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFE	-	SMCJ26CA	TVS	Vrwm=26V, Vbr=28.9..31.9V, 35.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFE	-	TV15C260J-G	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=35.63A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFE7	-	SM15T30A	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, 36.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFE7	-	SM15T30CA	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, 36A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
GFF	-	1.5SMCJ28	TVS	Vrwm=28V, 30A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFF	-	1SMC28	TVS	Vbr=31.1..34.4V, Vrwm=28V, 30.0A, 1500W(1ms)	403-01	3d	1a	Mot
GFF	-	SMCG28	TVS	Vrwm=28V, 30A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFF	-	SMCJ28	TVS	Vrwm=28V, Vbr=31.1..35.8V, 30A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFF	-	SMCJ28C	TVS	Vrwm=28V, Vbr=31.1..38.0V, 30.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFF	-	TV15C280K-G	TVS	Vrwm=28.0V, Vbr=31.10..38.0V, Ipp=30.0A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFG	-	1.5SMC33A	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, Ipp=33A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GFG	-	1.5SMCJ28A	TVS	Vrwm=28V, 33A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFG	-	1SMC28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, 33.0A, 1500W(1ms)	403-01	3d	1a	Mot
GFG	-	1SMC28AT3	TVS	Vbr=31.1..34.4V, Vrwm=28V, 33.0A, 1500W(1ms)	403	3d	1s	Ons
GFG	-	5.0SMC33A	Zener diode	31.30..35.80V, Zzt=10Ω, Izt=40mA, 5W	DO-214AB	1d	1b	Rul
GFG	-	CD214C-T28A	TVS	Vrwm=28V, Irsm=33A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GFG	-	SMCG28A	TVS	Vrwm=28V, 33A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFG	-	SMCJ28A	TVS	Vrwm=28V, Vbr=31.1..35.8V, 33A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFG	-	SMCJ28A	TVS	Vrwm=28V, Vbr=31.1..35.8V, 33A, 1500W(1mS)	DO-214AB	1d	1m	Di
GFG	-	SMCJ28CA	TVS	Vrwm=28V, Vbr=31.1..34.4V, 33.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFG	-	TV15C280J-G	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=33.04A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFG7	-	SM15T33A	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, 32.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFG7	-	SM15T33CA	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, 33A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
GFH	-	1.5SMCJ30	TVS	Vrwm=30V, 28A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFH	-	1SMC30	TVS	Vbr=33.3..36.8V, Vrwm=30V, 28.0A, 1500W(1ms)	403-01	3d	1a	Mot
GFH	-	SMCG30	TVS	Vrwm=30V, 28A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFH	-	SMCJ30	TVS	Vrwm=30V, Vbr=33.3..38.3V, 28A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFH	-	SMCJ30C	TVS	Vrwm=30V, Vbr=33.3..40.7V, 28.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFH	-	TV15C300K-G	TVS	Vrwm=30.0V, Vbr=33.30..40.70V, Ipp=28.04A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFJ	-	1.5SMC130	TVS	Vrwm=105V, Vbr=117..143V, Ipp=8A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
GFK	-	1.5SMC36A	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, Ipp=30A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GFK	-	1.5SMCJ30A	TVS	Vrwm=30V, 31A, 1500W(1ms)	DO-214AB	1d	1a	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
GFK	-	1SMC30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, 31.0A, 1500W(1ms)	403-01	3d	1a	Mot
GFK	-	1SMC30AT3	TVS	Vbr=33.3..36.8V, Vrwm=30V, 31.0A, 1500W(1ms)	403	3d	1s	Ons
GFK	-	5.0SMC36A	Zener diode	33.30..38.30V, Zzt=11Ω, Izt=30mA, 5W	DO-214AB	1d	1b	Rul
GFK	-	CD214C-T30A	TVS	Vrwm=30V, Irsm=31A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GFK	-	SMCG30A	TVS	Vrwm=30V, 31A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFK	-	SMCJ30A	TVS	Vrwm=30V, Vbr=33.3..38.3V, 31A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFK	-	SMCJ30A	TVS	Vrwm=30V, Vbr=33.3..38.3V, Vcl=48.4V, 31A, 1500W(1mS)	DO-214AB	1d	1m	Di
GFK	-	SMCJ30CA	TVS	Vrwm=30V, Vbr=33.3..36.8V, 31.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFK	-	TV15C300J-G	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=30.99A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFK7	-	SM15T36A	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, 30A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFK7	-	SM15T36CA	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, 30A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
GFL	-	1.5SMCJ33	TVS	Vrwm=33V, 25.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFL	-	1SMC33	TVS	Vbr=36.7..40.6V, Vrwm=33V, 25.2A, 1500W(1ms)	403-01	3d	1a	Mot
GFL	-	3T110ALC	Thy-SPD	Vdrm=90V, Vs=130V, Ipp=2.2A(1ms), 60pF	DO-214AA	1d	1a	Lfr
GFL	-	SMCG33	TVS	Vrwm=33V, 25.4A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFL	-	SMCJ33	TVS	Vrwm=33V, Vbr=36.7..44.9V, 25.4A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFL	-	SMCJ33C	TVS	Vrwm=33V, Vbr=36.7..44.9V, 25.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFL	-	TV15C330K-G	TVS	Vrwm=33.0V, Vbr=36.7..44.9V, Ipp=25.2A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFM	-	1.5SMC39A	TVS	Vrwm=33.3V, Vbr=37.1..41V, Ipp=28A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GFM	-	1.5SMCJ33A	TVS	Vrwm=33V, 28.1A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFM	-	1SMC33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, 28.1A, 1500W(1ms)	403-01	3d	1a	Mot
GFM	-	1SMC33AT3	TVS	Vbr=36.7..40.6V, Vrwm=33V, 28.1A, 1500W(1ms)	403	3d	1s	Ons
GFM	-	5.0SMC39A	Zener diode	36.70..42.20V, Zzt=14Ω, Izt=30mA, 5W	DO-214AB	1d	1b	Rul
GFM	-	CD214C-T33A	TVS	Vrwm=33V, Irsm=28.1A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GFM	-	SMCG33A	TVS	Vrwm=33V, 28.1A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFM	-	SMCJ33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, 28.1A, 1500W(1ms)	DO-214AB	1d	1m	Di
GFM	-	SMCJ33A	TVS	Vrwm=33V, Vbr=36.7..44.9V, 28.1A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFM	-	SMCJ33CA	TVS	Vrwm=33V, Vbr=36.7..40.6V, 28.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFM	-	TV15C330J-G	TVS	Vrwm=33.0V, Vbr=36.7..40.6V, Ipp=28.1A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFM7	-	SM15T39A	TVS	Vrwm=33.3V, Vbr=37.1..41V, 28A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFM7	-	SM15T39CA	TVS	Vrwm=33.3V, Vbr=37.1..41V, 28A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
GFN	-	1.5SMCJ36	TVS	Vrwm=36V, 23.3A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFN	-	1SMC36	TVS	Vbr=40.0..44.2V, Vrwm=36V, 23.3A, 1500W(1ms)	403-01	3d	1a	Mot
GFN	-	SMCG36	TVS	Vrwm=36V, 23.3A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFN	-	SMCJ36	TVS	Vrwm=36V, Vbr= 40..46V, 23.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFN	-	SMCJ36C	TVS	Vrwm=36V, Vbr= 40.0..48.9V, 23.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFN	-	TV15C360K-G	TVS	Vrwm=36.0V, Vbr=40.0..48.90V, Ipp=23.33A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFP	-	1.5SMC43A	TVS	Vrwm=36.8V, Vbr=40.9..45.2V, Ipp=25.3A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GFP	-	1.5SMCJ36A	TVS	Vrwm=36V, 25.8A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFP	-	1SMC36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, 25.8A, 1500W(1ms)	403-01	3d	1a	Mot
GFP	-	1SMC36AT3	TVS	Vbr=40.0..44.2V, Vrwm=36V, 25.8A, 1500W(1ms)	403	3d	1s	Ons
GFP	-	5.0SMC43A	Zener diode	40.0..46.0V, Zzt=20Ω, Izt=30mA, 5W	DO-214AB	1d	1b	Rul
GFP	-	CD214C-T36A	TVS	Vrwm=36V, Irsm=25.8A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GFP	-	SMCG36A	TVS	Vrwm=36V, 25.8A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFP	-	SMCJ36A	TVS	Vrwm=36V, Vbr= 40..46V, 25.8A, 1500W(1mS)	DO-214AB	1d	1m	Di
GFP	-	SMCJ36A	TVS	Vrwm=36V, Vbr= 40..46V, 25.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFP	-	SMCJ36CA	TVS	Vrwm=36V, Vbr= 40.0..44.2V, 25.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFP	-	TV15C360J-G	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=25.82A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFQ	-	1.5SMCJ40	TVS	Vrwm=40V, 21A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFQ	-	1SMC40	TVS	Vbr=44.4..49.1V, Vrwm=40V, 21.0A, 1500W(1ms)	403-01	3d	1a	Mot
GFQ	-	SMCG40	TVS	Vrwm=40V, 21A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFQ	-	SMCJ40	TVS	Vrwm=40V, Vbr=44.4..51.1V, 21A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFQ	-	SMCJ40C	TVS	Vrwm=40V, Vbr=44.4..54.3V, 21.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFQ	-	TV15C400K-G	TVS	Vrwm=40.0V, Vbr=44.40..54.30V, Ipp=21.01A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFR	-	1.5SMC47A	TVS	Vrwm=40.2V, Vbr=44.7..49.4V, Ipp=23.2A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GFR	-	1.5SMCJ40A	TVS	Vrwm=40V, 23.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFR	-	1SMC40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, 23.3A, 1500W(1ms)	403-01	3d	1a	Mot
GFR	-	1SMC40AT3	TVS	Vbr=44.4..49.1V, Vrwm=40V, 23.3A, 1500W(1ms)	403	3d	1s	Ons
GFR	-	5.0SMC47A	Zener diode	44.40..51.10V, Zzt=25Ω, Izt=25mA, 5W	DO-214AB	1d	1b	Rul
GFR	-	CD214C-T40A	TVS	Vrwm=40V, Irsm=23.3A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GFR	-	SMCG40A	TVS	Vrwm=40V, 23.3A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFR	-	SMCJ40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, 23.2A, 1500W(1mS)	DO-214AB	1d	1m	Di
GFR	-	SMCJ40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, 23.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFR	-	SMCJ40CA	TVS	Vrwm=40V, Vbr=44.4..49.1V, 23.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFR	-	TV15C400J-G	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=23.26A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFS	-	1.5SMCJ43	TVS	Vrwm=43V, 19.6A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFS	-	1SMC43	TVS	Vbr=47.8..52.8V, Vrwm=43V, 19.6A, 1500W(1ms)	403-01	3d	1a	Mot
GFS	-	SMCG43	TVS	Vrwm=43V, 19.6A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFS	-	SMCJ43	TVS	Vrwm=43V, Vbr=47.8..54.9V, 19.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFS	-	SMCJ43C	TVS	Vrwm=43V, Vbr=47.8..58.4V, 19.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
GFS	-	TV15C430K-G	TVS	Vrwm=43.0V, Vbr=47.80..58.40V, Ipp=19.56A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFT	-	1.5SMC51A	TVS	Vrwm=43.6V, Vbr=48.5..53.6V, Ipp=21.4A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GFT	-	1.5SMCJ43A	TVS	Vrwm=43V, 21.6A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFT	-	1SMC43A	TVS	Vbr=47.8..52.8V, Vrwm=43V, 21.6A, 1500W(1ms)	403-01	3d	1a	Mot
GFT	-	1SMC43AT3	TVS	Vbr=47.8..52.8V, Vrwm=43V, 21.6A, 1500W(1ms)	403	3d	1s	Ons
GFT	-	5.0SMC51A	Zener diode	47.80..54.90V, Zzt=27Ω, Izt=25mA, 5W	DO-214AB	1d	1b	Rul
GFT	-	CD214C-T43A	TVS	Vrwm=43V, Irsm=21.6A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GFT	-	SMCG43A	TVS	Vrwm=43V, 21.6A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFT	-	SMCJ43A	TVS	Vrwm=43V, Vbr=47.8..54.9V, 21.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFT	-	SMCJ43A	TVS	Vrwm=43V, Vbr=47.8..54.9V, 21.6A, 1500W(1mS)	DO-214AB	1d	1m	Di
GFT	-	SMCJ43CA	TVS	Vrwm=43V, Vbr=47.8..52.8V, 21.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFT	-	TV15C430J-G	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=21.61A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFU	-	1.5SMCJ45	TVS	Vrwm=45V, 18.7A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFU	-	1SMC45	TVS	Vbr=50.0..55.3V, Vrwm=45V, 18.7A, 1500W(1ms)	403-01	3d	1a	Mot
GFU	-	SMCG45	TVS	Vrwm=45V, 18.7A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFU	-	SMCJ45	TVS	Vrwm=45V, Vbr=50..57.5V, 18.7A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFU	-	SMCJ45C	TVS	Vrwm=45V, Vbr=50.0..61.1V, 18.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFU	-	TV15C450K-G	TVS	Vrwm=45.0V, Vbr=50.0..61.10V, Ipp=18.68A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFV	-	1.5SMC56A	TVS	Vrwm=47.8V, Vbr=53.2..58.8V, Ipp=19.5A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GFV	-	1.5SMCJ45A	TVS	Vrwm=45V, 20.6A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFV	-	1SMC45A	TVS	Vbr=50.0..55.3V, Vrwm=45V, 20.6A, 1500W(1ms)	403-01	3d	1a	Mot
GFV	-	1SMC45AT3	TVS	Vbr=50.0..55.3V, Vrwm=45V, 20.6A, 1500W(1ms)	403	3d	1s	Ons
GFV	-	CD214C-T45A	TVS	Vrwm=45V, Irsm=20.6A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GFV	-	SMCG45A	TVS	Vrwm=45V, 20.6A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFV	-	SMCJ45A	TVS	Vrwm=45V, Vbr=50..57.5V, 20.6A, 1500W(1mS)	DO-214AB	1d	1m	Di
GFV	-	SMCJ45A	TVS	Vrwm=45V, Vbr=50..57.5V, 20.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFV	-	SMCJ45CA	TVS	Vrwm=45V, Vbr=50.0..55.3V, 20.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFV	-	TV15C450J-G	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=20.63A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFW	-	1.5SMCJ48	TVS	Vrwm=48V, 17.5A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFW	-	1SMC48	TVS	Vbr=53.3..58.9V, Vrwm=48V, 17.5A, 1500W(1ms)	403-01	3d	1a	Mot
GFW	-	SMCG48	TVS	Vrwm=48V, 17.5A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFW	-	SMCJ48	TVS	Vrwm=48V, Vbr=53.3..61.3V, 17.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFW	-	SMCJ48C	TVS	Vrwm=48V, Vbr=53.3..65.1V, 17.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFW	-	TV15C480K-G	TVS	Vrwm=48.0V, Vbr=53.30..65.10V, Ipp=17.54A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFX	-	1.5SMCJ48A	TVS	Vrwm=48V, 19.4A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFX	-	1SMC48A	TVS	Vbr=53.3..58.9V, Vrwm=48V, 19.4A, 1500W(1ms)	403-01	3d	1a	Mot
GFX	-	1SMC48AT3	TVS	Vbr=53.3..58.9V, Vrwm=48V, 19.4A, 1500W(1ms)	403	3d	1s	Ons
GFX	-	5.0SMC56A	Zener diode	53.0..61.70V, Zzt=35Ω, Izt=20mA, 5W	DO-214AB	1d	1b	Rul
GFX	-	CD214C-T48A	TVS	Vrwm=48V, Irsm=19.4A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GFX	-	SMCG48A	TVS	Vrwm=48V, 19.4A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFX	-	SMCJ48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, 19.4A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFX	-	SMCJ48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, 19.4A, 1500W(1mS)	DO-214AB	1d	1m	Di
GFX	-	SMCJ48CA	TVS	Vrwm=48V, Vbr=53.3..58.9V, 19.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFX	-	TV15C480J-G	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=19.38A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFY	-	1.5SMCJ51	TVS	Vrwm=51V, 18.5A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFY	-	1SMC51	TVS	Vbr=56.7..60.0V, Vrwm=51V, 18.5A, 1500W(1ms)	403-01	3d	1a	Mot
GFY	-	SMCG51	TVS	Vrwm=51V, 16.5A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFY	-	SMCG51C	TVS	Vrwm=51V, 16.5A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
GFY	-	SMCJ51	TVS	Vrwm=51V, Vbr=56.7..65.2V, 16.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFY	-	SMCJ51C	TVS	Vrwm=51V, Vbr=56.7..69.3V, 16.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFY	-	TV15C510K-G	TVS	Vrwm=51.0V, Vbr=56.70..69.30V, Ipp=16.47A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GFZ	-	1.5SMC62A	TVS	Vrwm=53V, Vbr=58.9..65.1V, Ipp=17.7A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GFZ	-	1.5SMCJ51A	TVS	Vrwm=51V, 18.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GFZ	-	1SMC51A	TVS	Vbr=56.7..60.0V, Vrwm=51V, 18.2A, 1500W(1ms)	403-01	3d	1a	Mot
GFZ	-	1SMC51AT3	TVS	Vbr=56.7..62.7V, Vrwm=51V, 18.2A, 1500W(1ms)	403	3d	1s	Ons
GFZ	-	5.0SMC60A	Zener diode	56.70..65.20V, Zzt=40Ω, Izt=20mA, 5W	DO-214AB	1d	1b	Rul
GFZ	-	CD214C-T51A	TVS	Vrwm=51V, Irsm=18.2A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GFZ	-	SMCG51A	TVS	Vrwm=51V, 18.2A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GFZ	-	SMCG51CA	TVS	Vrwm=51V, 18.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
GFZ	-	SMCJ51A	TVS	Vrwm=51V, Vbr=56.7..65.2V, 18.2A, 1500W(1mS)	DO-214AB	1d	1m	Di
GFZ	-	SMCJ51A	TVS	Vrwm=51V, Vbr=56.7..65.2V, 18.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GFZ	-	SMCJ51CA	TVS	Vrwm=51V, Vbr=56.7..62.7V, 18.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GFZ	-	TV15C510J-G	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=18.20A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GG	-	3T130A	Thy-SPD	Vdrm=120V, Vs=160V, Ipp=50A, 40pF	DO-214AA	1d	1a	Mde
GG	-	BAR63-02W	PIN-diode	Sw, RF, 100V, 100mA, Vf<1.1V(50mA), < 0.3pF	SCD-80	6d	1u	Inf
GG	-	DDZ3V3A	Zener diode	3.3V±10%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
GG	-	GF1G	Si-diode	Rectifier, 400V, 1A, Vf<1.1V(1A), 2µs	DO-214BA	1d	1k	Vs
GG	-	P1300SA	Thy-SPD	Vdrm=120V, Vs=160V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GG	-	PZU8.2B	Zener diode	7.76..8.64V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GG	-	T130AB-LC	Thy-SPD	V Of-St=120V, Vs=160V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
GG	-	Z2SMB9V1	Zener diode	9.1V±5%, Izt=50mA, 2W	DO-214AA	1d	2j	Fag
GGA	-	TV15C800K-G	TVS	Vrwm=80.0V, Vbr=88.96..108.80V, Ipp=10.47A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGB	-	TV15C800J-G	TVS	Vrwm=80.0V, Vbr=88.80..97.60V, Ipp=11.57A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGD	-	1.5SMCJ54	TVS	Vrwm=54V, 15.6A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGD	-	1SMC54	TVS	Vbr=60.0..66.3V, Vrwm=54V, 15.6A, 1500W(1ms)	403-01	3d	1a	Mot
GGD	-	SMCG54	TVS	Vrwm=54V, 15.6A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGD	-	SMCJ26	TVS	Vrwm=26V, Vbr=28.9..33.2V, 32.2A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGD	-	SMCJ54	TVS	Vrwm=54V, Vbr=60..69V, 15.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGD	-	SMCJ54C	TVS	Vrwm=54V, Vbr=60.0..73.3V, 15.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGD	-	TV15C540K-G	TVS	Vrwm=54.0V, Vbr=60.0..73.30V, Ipp=15.58A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGE	-	1.5SMCJ54A	TVS	Vrwm=54V, 17.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGE	-	1SMC54A	TVS	Vbr=60.0..66.3V, Vrwm=54V, 17.2A, 1500W(1ms)	403-01	3d	1a	Mot
GGE	-	1SMC54AT3	TVS	Vbr=60.0..66.3V, Vrwm=54V, 17.2A, 1500W(1ms)	403	3d	1s	Ons
GGE	-	5.0SMC62A	Zener diode	60.0..69.0V, Zzt=42Ω, Izt=20mA, 5W	DO-214AB	1d	1b	Rul
GGE	-	CD214C-T54A	TVS	Vrwm=54V, Irsm=17.2A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GGE	-	SMCG54A	TVS	Vrwm=54V, 17.2A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGE	-	SMCJ26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, 35.6A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGE	-	SMCJ54A	TVS	Vrwm=54V, Vbr=60..69V, 17.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGE	-	SMCJ54A	TVS	Vrwm=54V, Vbr=60..69V, 17.2A, 1500W(1mS)	DO-214AB	1d	1m	Di
GGE	-	SMCJ54CA	TVS	Vrwm=54V, Vbr=60.0..66.3V, 17.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGE	-	TV15C540J-G	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=17.22A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGF	-	1.5SMCJ58	TVS	Vrwm=58V, 14.6A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGF	-	1SMC58	TVS	Vbr=64.4..71.2V, Vrwm=58V, 14.6A, 1500W(1ms)	403-01	3d	1a	Mot
GGF	-	SMCG58	TVS	Vrwm=58V, 14.6A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGF	-	SMCJ28	TVS	Vrwm=28V, Vbr=31.1..35.8V, 30A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGF	-	SMCJ58	TVS	Vrwm=58V, Vbr=64.4..74.1V, 14.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGF	-	SMCJ58C	TVS	Vrwm=58V, Vbr=64.4..78.7V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGF	-	TV15C580K-G	TVS	Vrwm=58.0V, Vbr=64.40..78.70V, Ipp=14.56A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGG	-	1.5SMC68A	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, Ipp=16.3A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GGG	-	1.5SMCJ58A	TVS	Vrwm=58V, 16A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGG	-	1SMC58A	TVS	Vbr=64.4..71.2V, Vrwm=58V, 16.0A, 1500W(1ms)	403-01	3d	1a	Mot
GGG	-	1SMC58AT3	TVS	Vbr=64.4..71.2V, Vrwm=58V, 16.0A, 1500W(1ms)	403	3d	1s	Ons
GGG	-	5.0SMC68A	Zener diode	64.40..74.10V, Zzt=44Ω, Izt=20mA, 5W	DO-214AB	1d	1b	Rul
GGG	-	CD214C-T58A	TVS	Vrwm=58V, Irsm=16A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GGG	-	SMCG58A	TVS	Vrwm=58V, 16A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGG	-	SMCJ28A	TVS	Vrwm=28V, Vbr=31.1..35.8V, 33A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGG	-	SMCJ58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, 16A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGG	-	SMCJ58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, 16A, 1500W(1mS)	DO-214AB	1d	1m	Di
GGG	-	SMCJ58CA	TVS	Vrwm=58V, Vbr=64.4..71.2V, 16.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGG	-	TV15C580J-G	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=16.03A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGG7	-	SM15T68A	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, 16.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGG7	-	SM15T68CA	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, 16.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
GGH	-	1.5SMCJ60	TVS	Vrwm=60V, 14A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGH	-	1SMC60	TVS	Vbr=66.7..73.7V, Vrwm=60V, 14.0A, 1500W(1ms)	403-01	3d	1a	Mot
GGH	-	SMCG60	TVS	Vrwm=60V, 14A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGH	-	SMCJ30	TVS	Vrwm=30V, Vbr=33.3..38.3V, 28A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGH	-	SMCJ60	TVS	Vrwm=60V, Vbr=66.7..76.7V, 14A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGH	-	SMCJ60C	TVS	Vrwm=60V, Vbr=66.7..81.5V, 14.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGH	-	TV15C600K-G	TVS	Vrwm=60.0V, Vbr=66.70..81.50V, Ipp=14.02A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGJ	-	1.5SMC130A	TVS	Vrwm=111V, Vbr=124..137V, Ipp=8.4A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
GGK	-	1.5SMCJ60A	TVS	Vrwm=60V, 15.5A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGK	-	1SMC60A	TVS	Vbr=66.7..73.7V, Vrwm=60V, 15.5A, 1500W(1ms)	403-01	3d	1a	Mot
GGK	-	1SMC60AT3	TVS	Vbr=66.7..73.7V, Vrwm=60V, 15.5A, 1500W(1ms)	403	3d	1s	Ons
GGK	-	CD214C-T60A	TVS	Vrwm=60V, Irsm=15.5A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GGK	-	SMCG60A	TVS	Vrwm=60V, 15.5A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGK	-	SMCJ30A	TVS	Vrwm=30V, Vbr=33.3..38.3V, 31A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGK	-	SMCJ60A	TVS	Vrwm=60V, Vbr=66.7..76.7V, 15.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGK	-	SMCJ60A	TVS	Vrwm=60V, Vbr=66.7..76.7V, 15.5A, 1500W(1mS)	DO-214AB	1d	1m	Di
GGK	-	SMCJ60CA	TVS	Vrwm=60V, Vbr=66.7..73.7V, 15.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGK	-	TV15C600J-G	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=15.50A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGL	-	1.5SMCJ64	TVS	Vrwm=64V, 13.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGL	-	1SMC64	TVS	Vbr=71.1..78.6V, Vrwm=64V, 13.2A, 1500W(1ms)	403-01	3d	1a	Mot
GGL	-	3T130ALC	Thy-SPD	Vdrm=120V, Vs=160V, Ipp=2.2A(1ms), 40pF	DO-214AA	1d	1a	Lfr
GGL	-	SMCG64	TVS	Vrwm=64V, 13.2A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGL	-	SMCJ33	TVS	Vrwm=33V, Vbr=36.7..44.9V, 25.4A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGL	-	SMCJ64	TVS	Vrwm=64V, Vbr=71.1..81.8V, 13.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGL	-	SMCJ64C	TVS	Vrwm=64V, Vbr=71.1..86.4V, 13.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGL	-	TV15C640K-G	TVS	Vrwm=64.0V, Vbr=71.10..86.90V, Ipp=13.16A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGM	-	1.5SMC75A	TVS	Vrwm=64.1V, Vbr=71.3..78.8V, Ipp=14.6A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GGM	-	1.5SMCJ64A	TVS	Vrwm=64V, 14.6A, 1500W(1ms)	DO-214AB	1d	1a	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
GGM	-	1SMC64A	TVS	Vbr=71.1..78.6V, Vrwm=64V, 14.6A, 1500W(1ms)	403-01	3d	1a	Mot
GGM	-	1SMC64AT3	TVS	Vbr=71.1..78.6V, Vrwm=64V, 14.6A, 1500W(1ms)	403	3d	1s	Ons
GGM	-	5.0SMC75A	Zener diode	71.10..81.10V, Zzt=45Ω, Izt=20mA, 5W	DO-214AB	1d	1b	Rul
GGM	-	CD214C-T64A	TVS	Vrwm=64V, Irsm=14.6A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GGM	-	SMCG64A	TVS	Vrwm=64V, 14.6A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGM	-	SMCJ33A	TVS	Vrwm=33V, Vbr=36.7..44.9V, 28.1A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGM	-	SMCJ64A	TVS	Vrwm=64V, Vbr=71.1..81.8V, 14.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGM	-	SMCJ64A	TVS	Vrwm=64V, Vbr=71.1..81.8V, 14.6A, 1500W(1mS)	DO-214AB	1d	1m	Di
GGM	-	SMCJ64CA	TVS	Vrwm=64V, Vbr=71.1..78.6V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGM	-	TV15C640J-G	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=14.56A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGN	-	1.5SMCJ70	TVS	Vrwm=70V, 12A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGN	-	1SMC70	TVS	Vbr=77.8..86V, Vrwm=70V, 12.0A, 1500W(1ms)	403-01	3d	1a	Mot
GGN	-	SMCG70	TVS	Vrwm=70V, 12A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGN	-	SMCJ36	TVS	Vrwm=36V, Vbr= 40..46V, 23.3A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGN	-	SMCJ70	TVS	Vrwm=70V, Vbr=77.8..89.5V, 12A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGN	-	SMCJ70C	TVS	Vrwm=70V, Vbr=77.8..95.1V, 12A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGN	-	TV15C700K-G	TVS	Vrwm=70.0V, Vbr=77.80..95.10V, Ipp=12.0A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGP	-	1.5SMC82A	TVS	Vrwm=70.1V, Vbr=77.9..86.1V, Ipp=13.3A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GGP	-	1.5SMCJ70A	TVS	Vrwm=70V, 13.3A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGP	-	1SMC70A	TVS	Vbr=77.8..86V, Vrwm=70V, 13.3A, 1500W(1ms)	403-01	3d	1a	Mot
GGP	-	1SMC70AT3	TVS	Vbr=77.8..86V, Vrwm=70V, 13.3A, 1500W(1ms)	403	3d	1s	Ons
GGP	-	5.0SMC82A	Zener diode	77.80..89.50V, Zzt=65Ω, Izt=15mA, 5W	DO-214AB	1d	1b	Rul
GGP	-	CD214C-T70A	TVS	Vrwm=70V, Irsm=13.3A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GGP	-	SMCG70A	TVS	Vrwm=70V, 13.3A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGP	-	SMCJ36A	TVS	Vrwm=36V, Vbr= 40..46V, 25.8A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGP	-	SMCJ70A	TVS	Vrwm=70V, Vbr=77.8..89.5V, 13.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGP	-	SMCJ70A	TVS	Vrwm=70V, Vbr=77.8..89.5V, 13.3A, 1500W(1mS)	DO-214AB	1d	1m	Di
GGP	-	SMCJ70CA	TVS	Vrwm=70V, Vbr=77.8..86 1V, 13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGP	-	TV15C700J-G	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=13.27A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGQ	-	1.5SMCJ75	TVS	Vrwm=75V, 11.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGQ	-	1SMC75	TVS	Vbr=83.3..92.1V, Vrwm=75V, 11.2A, 1500W(1ms)	403-01	3d	1a	Mot
GGQ	-	SMCG75	TVS	Vrwm=75V, 11.2A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGQ	-	SMCJ40	TVS	Vrwm=40V, Vbr=44.4..51.1V, 21A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGQ	-	SMCJ75	TVS	Vrwm=75V, Vbr=83.3..95.8V, 12.4A, 1500W(1mS)	DO-214AB	1d	1k	Vs
GGQ	-	SMCJ75C	TVS	Vrwm=75V, Vbr=83.3..102V, 11.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGQ	-	TV15C750K-G	TVS	Vrwm=75.0V, Vbr=83.30..102.0V, Ipp=11.19A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGR	-	1.5SMCJ75A	TVS	Vrwm=75V, 12.4A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGR	-	1SMC75A	TVS	Vbr=83.3..92.1V, Vrwm=75V, 12.4A, 1500W(1ms)	403-01	3d	1a	Mot
GGR	-	1SMC75AT3	TVS	Vbr=83.3..92.1V, Vrwm=75V, 12.4A, 1500W(1ms)	403	3d	1s	Ons
GGR	-	5.0SMC91A	Zener diode	83.30..95.80V, Zzt=75Ω, Izt=15mA, 5W	DO-214AB	1d	1b	Rul
GGR	-	CD214C-T75A	TVS	Vrwm=75V, Irsm=12.4A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GGR	-	SMCG75A	TVS	Vrwm=75V, 12.4A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGR	-	SMCJ40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, 23.3A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGR	-	SMCJ75A	TVS	Vrwm=75V, Vbr=83.3..102V, 12.4A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGR	-	SMCJ75A	TVS	Vrwm=75V, Vbr=83.3..95.8V, 12.4A, 1500W(1mS)	DO-214AB	1d	1m	Di
GGR	-	SMCJ75CA	TVS	Vrwm=75V, Vbr=83.3..92.1V,12.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGR	-	TV15C750J-G	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=12.40A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGS	-	1.5SMCJ78	TVS	Vrwm=78V, 10.8A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGS	-	1SMC78	TVS	Vbr=86.7..95.8V, Vrwm=78V, 10.8A, 1500W(1ms)	403-01	3d	1a	Mot
GGS	-	SMCG78	TVS	Vrwm=78V, 10.8A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGS	-	SMCJ43	TVS	Vrwm=43V, Vbr=47.8..54.9V, 19.6A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGS	-	SMCJ78	TVS	Vrwm=78V, Vbr=86.7..99.7V, 10.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGS	-	SMCJ78C	TVS	Vrwm=78V, Vbr=86.7..106V, 10.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGS	-	TV15C780K-G	TVS	Vrwm=78.0V, Vbr=86.70..106.0V, Ipp=10.79A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGT	-	1.5SMC91A	TVS	Vrwm=77.8V, Vbr=86.5..95.5V, Ipp=12A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GGT	-	1.5SMCJ78A	TVS	Vrwm=78V, 11.4A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGT	-	1SMC78A	TVS	Vbr=86.7..95.8V, Vrwm=78V, 11.9A, 1500W(1ms)	403-01	3d	1a	Mot
GGT	-	1SMC78AT3	TVS	Vbr=86.7..95.8V, Vrwm=78V, 11.9A, 1500W(1ms)	403	3d	1s	Ons
GGT	-	CD214C-T78A	TVS	Vrwm=78V, Irsm=11.4A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GGT	-	SMCG78A	TVS	Vrwm=78V, 11.9A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGT	-	SMCJ43A	TVS	Vrwm=43V, Vbr=47.8..54.9V, 21.6A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGT	-	SMCJ78A	TVS	Vrwm=78V, Vbr=86.7..99.7V, 11.4A, 1500W(1mS)	DO-214AB	1d	1m	Di
GGT	-	SMCJ78A	TVS	Vrwm=78V, Vbr=86.7..99.7V, 11.9A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGT	-	SMCJ78CA	TVS	Vrwm=78V, Vbr=86.7..95.8V, 11.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGT	-	TV15C780J-G	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=11.90A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGU	-	1.5SMCJ85	TVS	Vrwm=85V, 9.9A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGU	-	1SMC85	TVS	Vbr=94.4..104V, Vrwm=85V, 9.9A, 1500W(1ms)	403-01	3d	1a	Mot
GGU	-	SMCG85	TVS	Vrwm=85V, 9.9A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGU	-	SMCJ45	TVS	Vrwm=45V, Vbr=50..57.5V, 18.7A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGU	-	SMCJ85	TVS	Vrwm=85V, Vbr=94.4..108.2V, 9.9A, 1500W(1ms)	DO-214AB	1d	1k	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
GGU	-	SMCJ85C	TVS	Vrwm=85V, Vbr=94.4..115V, 9.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGU	-	TV15C850K-G	TVS	Vrwm=85.0V, Vbr=94.40..115.0V, Ipp=9.93A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGV	-	1.5SMC100A	TVS	Vrwm=85.5V, Vbr=95..105V, Ipp=11A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GGV	-	1.5SMCJ85A	TVS	Vrwm=85V, 10.4A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGV	-	1SMC85A	TVS	Vbr=94.4..104V, Vrwm=85V, 10.9A, 1500W(1ms)	403-01	3d	1a	Mot
GGV	-	5.0SMC100A	Zener diode	94.40..108.20V, Zzt=90Ω, Izt=12mA, 5W	DO-214AB	1d	1b	Rul
GGV	-	CD214C-T85A	TVS	Vrwm=85V, Irsm=10.4A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GGV	-	SMCG85A	TVS	Vrwm=85V, 10.9A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGV	-	SMCJ45A	TVS	Vrwm=45V, Vbr=50..57.5V, 21A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGV	-	SMCJ85A	TVS	Vrwm=85V, Vbr=94.4..108.2V, 10.4A, 1500W(1mS)	DO-214AB	1d	1m	Di
GGV	-	SMCJ85A	TVS	Vrwm=85V, Vbr=94.4..115V, 10.9A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGV	-	SMCJ85CA	TVS	Vrwm=85V, Vbr=94.4..108.2V, 10.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGV	-	TV15C850J-G	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=10.95A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGV7	-	SM15T100A	TVS	Vrwm=85.5V, Vbr=95..105V, 11A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGV7	-	SM15T100CA	TVS	Vrwm=85.5V, Vbr=95..105V, 11A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
GGW	-	1.5SMCJ90	TVS	Vrwm=90V, 9.4A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGW	-	1SMC90	TVS	Vbr=100..111V, Vrwm=90V, 9.4A, 1500W(1ms)	403-01	3d	1a	Mot
GGW	-	SMCG90	TVS	Vrwm=90V, 9.4A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGW	-	SMCJ48	TVS	Vrwm=48V, Vbr=53.3..61.3V, 18A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGW	-	SMCJ90	TVS	Vrwm=90V, Vbr=100..122V, 9.4A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGW	-	SMCJ90C	TVS	Vrwm=90V, Vbr=100..122V, 9.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGW	-	TV15C900K-G	TVS	Vrwm=90V, Vbr=100.0..122.0V, Ipp=9.38A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGX	-	1.5SMC110A	TVS	Vrwm=94V, Vbr=105..116V, Ipp=9.9A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GGX	-	1.5SMCJ90A	TVS	Vrwm=90V, 10.3A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGX	-	1SMC90A	TVS	Vbr=100..111V, Vrwm=90V, 10.3A, 1500W(1ms)	403-01	3d	1a	Mot
GGX	-	5.0SMC110A	Zener diode	100.0..115.20V, Zzt=125Ω, Izt=12mA, 5W	DO-214AB	1d	1b	Rul
GGX	-	CD214C-T90A	TVS	Vrwm=90V, Irsm=10.3A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GGX	-	SMCG90A	TVS	Vrwm=90V, 10.3A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGX	-	SMCJ48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, 19.4A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGX	-	SMCJ90A	TVS	Vrwm=90V, Vbr=100..115.5V, 10.3A, 1500W(1mS)	DO-214AB	1d	1k	Vs
GGX	-	SMCJ90A	TVS	Vrwm=90V, Vbr=100..115.5V, 10.3A, 1500W(1mS)	DO-214AB	1d	1m	Di
GGX	-	SMCJ90A	TVS	Vrwm=90V, Vbr=100..122V, 10.7A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGX	-	SMCJ90CA	TVS	Vrwm=90V, Vbr=100..115.5V, 10.3A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Eic
GGX	-	TV15C900J-G	TVS	Vrwm=90V, Vbr=100.0..111.0V, Ipp=10.27A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGY	-	1.5SMCJ100	TVS	Vrwm=100V, 8.4A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGY	-	1SMC100	TVS	Vbr=111..123V, Vrwm=100V, 8.4A, 1500W(1ms)	403-01	3d	1a	Mot
GGY	-	SMCG100	TVS	Vrwm=100V, 8.4A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGY	-	SMCJ100	TVS	Vrwm=100V, Vbr=111..136V, 8.4A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGY	-	SMCJ100C	TVS	Vrwm=100V, Vbr=111..136V, 8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGY	-	SMCJ51	TVS	Vrwm=51V, Vbr=56.7..65.2V, 16.5A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGY	-	TV15C101K-G	TVS	Vrwm=100.0V, Vbr=111.0..136.0V, Ipp=8.38A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GGZ	-	1.5SMC120A	TVS	Vrwm=102V, Vbr=114..126V, Ipp=9.1A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GGZ	-	1.5SMCJ100A	TVS	Vrwm=100V, 9.3A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GGZ	-	1SMC100A	TVS	Vbr=111..123V, Vrwm=100V, 9.3A, 1500W(1ms)	403-01	3d	1a	Mot
GGZ	-	5.0SMC120A	Zener diode	111.0..128.0V, Zzt=170Ω, Izt=10mA, 5W	DO-214AB	1d	1b	Rul
GGZ	-	CD214C-T100A	TVS	Vrwm=100V, Irsm=9.3A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GGZ	-	SMCG100A	TVS	Vrwm=100V, 9.3A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GGZ	-	SMCJ100A	TVS	Vrwm=100V, Vbr=111..136V, 8.4A, 1500W(1ms)	DO-214AB	1d	1m	Di
GGZ	-	SMCJ100A	TVS	Vrwm=100V, Vbr=111..136V, 9.3A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GGZ	-	SMCJ100CA	TVS	Vrwm=100V, Vbr=111..123V, 9.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GGZ	-	SMCJ51A	TVS	Vrwm=51V, Vbr=56.7..65.2V, 18.2A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GGZ	-	TV15C101J-G	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=9.26A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GH	-	3T150A	Thy-SPD	Vdrm=140V, Vs=180V, Ipp=50A, 40pF	DO-214AA	1d	1a	Mde
GH	-	P1500SA	Thy-SPD	Vdrm=140V, Vs=180V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GH	-	PZU9.1B	Zener diode	8.56..9.55V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GH	-	T150AB-LC	Thy-SPD	V Of-St=140V, Vs=180V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GH	-	Z2SMB10	Zener diode	10V±5%, Izt=50mA, 2W	DO-214AA	1d	2j	Fag
GHA	-	TV15C141J-G	TVS	Vrwm=140V, Vbr=155.68..190.40V, Ipp=5.99A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHB	-	TV15C141K-G	TVS	Vrwm=140V, Vbr=155.0..171.40V, Ipp=6.61A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHD	-	1.5SMCJ110	TVS	Vrwm=110V, 7.7A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHD	-	1SMC110	TVS	Vbr=122..135V, Vrwm=110V, 7.7A, 1500W(1ms)	403-01	3d	1a	Mot
GHD	-	SMCG110	TVS	Vrwm=110V, 7.7A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GHD	-	SMCJ110	TVS	Vrwm=110V, Vbr=122..140.5V, 7.7A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GHD	-	SMCJ110C	TVS	Vrwm=110V, Vbr=122..149V, 7.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GHD	-	SMCJ54	TVS	Vrwm=54V, Vbr=60..69V, 15.6A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GHD	-	TV15C111K-G	TVS	Vrwm=110.0V, Vbr=122.0..149.0V, Ipp=7.65A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHE	-	1.5SMC130A	TVS	Vrwm=111V, Vbr=124..137V, Ipp=8.4A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GHE	-	1.5SMCJ110A	TVS	Vrwm=110V, 8.4A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHE	-	1SMC110A	TVS	Vbr=122..135V, Vrwm=110V, 8.5A, 1500W(1ms)	403-01	3d	1a	Mot
GHE	-	5.0SMC130A	Zener diode	122.0..140.50V, Zzt=190Ω, Izt=10mA, 5W	DO-214AB	1d	1b	Rul

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
GHE	-	CD214C-T110A	TVS	Vrwm=110V, Irsm=8.4A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GHE	-	SMCG110A	TVS	Vrwm=110V, 8.5A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GHE	-	SMCJ110A	TVS	Vrwm=110V, Vbr=122..140.5V, 8.4A, 1500W(1mS)	DO-214AB	1d	1m	Di
GHE	-	SMCJ110A	TVS	Vrwm=110V, Vbr=122..140.5V, 8.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GHE	-	SMCJ110CA	TVS	Vrwm=110V, Vbr=122..140.5V, 8.4A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Eic
GHE	-	SMCJ54A	TVS	Vrwm=54V, Vbr=60..69V, 17.2A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GHE	-	TV15C111J-G	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=8.47A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHF	-	1.5SMCJ120	TVS	Vrwm=120V, 7A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHF	-	1SMC120	TVS	Vbr=133..147V, Vrwm=120V, 7.0A, 1500W(1ms)	403-01	3d	1a	Mot
GHF	-	SMCG120	TVS	Vrwm=120V, 7A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GHF	-	SMCJ120	TVS	Vrwm=120V, Vbr=133..153V, 7.3A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GHF	-	SMCJ120	TVS	Vrwm=120V, Vbr=133..153V, 7A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GHF	-	SMCJ120C	TVS	Vrwm=120V, Vbr=133..163V, 7.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GHF	-	SMCJ58	TVS	Vrwm=58V, Vbr=64.4..74.1V, 14.6A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GHF	-	TV15C121K-G	TVS	Vrwm=120.0V, Vbr=133.0..163.0V, Ipp=7.01A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHG	-	1.5SMCJ120A	TVS	Vrwm=120V, 7.9A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHG	-	1SMC120A	TVS	Vbr=133..147V, Vrwm=120V, 7.8A, 1500W(1ms)	403-01	3d	1a	Mot
GHG	-	5.0SMC140A	Zener diode	133.0..153.0V, Zzt=230Ω, Izt=8mA, 5W	DO-214AB	1d	1b	Rul
GHG	-	CD214C-T120A	TVS	Vrwm=120V, Irsm=7.9A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GHG	-	SMCG120A	TVS	Vrwm=120V, 7.8A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GHG	-	SMCJ120A	TVS	Vrwm=120V, Vbr=133..153V, 7.9A, 1500W(1mS)	DO-214AB	1d	1m	Di
GHG	-	SMCJ120A	TVS	Vrwm=120V, Vbr=133..153V, Vcl=193V, 7.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GHG	-	SMCJ120CA	TVS	Vrwm=120V, Vbr=133..153V, 7.9A, 1500W(1mS), Bidir.	DO-214AB	1ba	1j	Eic
GHG	-	SMCJ58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, 16A, 1500W(1ms)	DO-214AB	1d	1c	Rfe
GHG	-	TV15C121J-G	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=7.77A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHH	-	1.5SMCJ130	TVS	Vrwm=130V, 6.5A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHH	-	1SMC130	TVS	Vbr=144..159V, Vrwm=130V, 6.5A, 1500W(1ms)	403-01	3d	1a	Mot
GHH	-	SMCG130	TVS	Vrwm=130V, 6.5A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GHH	-	SMCJ130	TVS	Vrwm=130V, Vbr=144..165.5V, 6.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GHH	-	SMCJ130C	TVS	Vrwm=130V, Vbr=144..176V, 6.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GHH	-	TV15C131K-G	TVS	Vrwm=130V, Vbr=144.0..176.0V, Ipp=6.49A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHJ	-	1.5SMC150	TVS	Vrwm=121V, Vbr=135..165V, Ipp=7A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
GHK	-	1.5SMC150A	TVS	Vrwm=128V, Vbr=143..158V, Ipp=7.2A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GHK	-	1.5SMCJ130A	TVS	Vrwm=130V, 7.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHK	-	1SMC130A	TVS	Vbr=144..159V, Vrwm=130V, 7.2A, 1500W(1ms)	403-01	3d	1a	Mot
GHK	-	5.0SMC150A	Zener diode	144.0..165.50V, Zzt=330Ω, Izt=8mA, 5W	DO-214AB	1d	1b	Rul
GHK	-	CD214C-T130A	TVS	Vrwm=130V, Irsm=7.2A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GHK	-	SMCG130A	TVS	Vrwm=130V, 7.2A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GHK	-	SMCJ130A	TVS	Vrwm=130V, Vbr=144..165.5V, Vcl=209V, 7.A, 1500W(1mS)	DO-214AB	1d	1m	Di
GHK	-	SMCJ130A	TVS	Vrwm=130V, Vbr=144..176V, 7.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GHK	-	SMCJ130CA	TVS	Vrwm=130V, Vbr=144..159V, 7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GHK	-	TV15C131J-G	TVS	Vrwm=130V, Vbr=144.0..159.0V, Ipp=7.18A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHK7	-	SM15T150A	TVS	Vrwm=128V, Vbr=143..158V, 7.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GHK7	-	SM15T150CA	TVS	Vrwm=128V, Vbr=143..158V, 7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
GHL	-	1.5SMCJ150	TVS	Vrwm=150V, 5.6A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHL	-	1SMC150	TVS	Vbr=167..185V, Vrwm=150V, 5.6A, 1500W(1ms)	403-01	3d	1a	Mot
GHL	-	3T150ALC	Thy-SPD	Vdrm=140V, Vs=180V, Ipp=2.2A(1ms), 40pF	DO-214AA	1d	1a	Lfr
GHL	-	SMCG150	TVS	Vrwm=150V, 5.6A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GHL	-	SMCJ150	TVS	Vrwm=150V, Vbr=167..192.5V, 5.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GHL	-	SMCJ150C	TVS	Vrwm=150V, Vbr=167..204V, 5.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GHL	-	TV15C151J-G	TVS	Vrwm=150.0V, Vbr=167.0..204.0V, Ipp=5.60A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHM	-	1.5SMC160A	TVS	Vrwm=136V, Vbr=152..168V, Ipp=6.8A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GHM	-	1.5SMCJ150A	TVS	Vrwm=150V, 6.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHM	-	1SMC150A	TVS	Vbr=167..185V, Vrwm=150V, 6.2A, 1500W(1ms)	403-01	3d	1a	Mot
GHM	-	5.0SMC180A	Zener diode	167.0..192.60V, Zzt=430Ω, Izt=5mA, 5W	DO-214AB	1d	1b	Rul
GHM	-	CD214C-T150A	TVS	Vrwm=150V, Irsm=6.2A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GHM	-	SMCG150A	TVS	Vrwm=150V, 6.2A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GHM	-	SMCG150CA	TVS	Vrwm=150V, 6.2A, 1500W(1ms), Bidir.	DO-215AB	5ba	1l	Vs
GHM	-	SMCJ150A	TVS	Vrwm=150V, Vbr=167..192.5V, 6.2A, 1500W(1mS)	DO-214AB	1d	1m	Di
GHM	-	SMCJ150A	TVS	Vrwm=150V, Vbr=167..192.5V, 6.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GHM	-	SMCJ150CA	TVS	Vrwm=150V, Vbr=167..185V, 6.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GHM	-	TV15C151K-G	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=6.17A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHN	-	1.5SMCJ160	TVS	Vrwm=160V, 5.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHN	-	1SMC160	TVS	Vbr=178..197V, Vrwm=160V, 5.2A, 1500W(1ms)	403-01	3d	1a	Mot
GHN	-	SMCG160	TVS	Vrwm=160V, 5.2A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GHN	-	SMCJ160	TVS	Vrwm=160V, Vbr=178..218V, 5.2A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GHN	-	SMCJ160C	TVS	Vrwm=160V, Vbr=178..218V, 5.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GHN	-	TV15C161K-G	TVS	Vrwm=160.0V, Vbr=178.0..218.0V, Ipp=5.23A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHP	-	1.5SMCJ160A	TVS	Vrwm=160V, 5.8A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHP	-	1SMC160A	TVS	Vbr=178..197V, Vrwm=160V, 5.8A, 1500W(1ms)	403-01	3d	1a	Mot

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
GHP	-	5.0SMC190A	Zener diode	178.0..197.0V, Zzt=450Ω, Izt=5mA, 5W	DO-214AB	1d	1b	Rul
GHP	-	CD214C-T160A	TVS	Vrwm=160V, Irsm=5.8A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GHP	-	SMCG160A	TVS	Vrwm=160V, 5.8A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GHP	-	SMCJ160A	TVS	Vrwm=160V, Vbr=178..205V, 5.8A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GHP	-	SMCJ160A	TVS	Vrwm=160V, Vbr=178..205V, 5.8A, 1500W(1mS)	DO-214AB	1d	1m	Di
GHP	-	SMCJ160CA	TVS	Vrwm=160V, Vbr=178..197V, 5.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GHP	-	SMCJ180A	TVS	Vrwm=180V, Vbr=200..220V, 5.14A, 1500W(1mS)	DO-214AB	1d	2m	Rul
GHP	-	TV15C161J-G	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=5.79A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHQ	-	1.5SMCJ170	TVS	Vrwm=170V, 4.9A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHQ	-	1SMC170	TVS	Vbr=189..209V, Vrwm=170V, 4.9A, 1500W(1ms)	403-01	3d	1a	Mot
GHQ	-	SMCG170	TVS	Vrwm=170V, 4.9A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GHQ	-	SMCJ170	TVS	Vrwm=170V, Vbr=189..217V, 4.9A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GHQ	-	SMCJ170C	TVS	Vrwm=170V, Vbr=189..231V, 4.90A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GHQ	-	TV15C171K-G	TVS	Vrwm=170.0V, Vbr=189.0..231.0V, Ipp=4.93A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHR	-	1.5SMC200A	TVS	Vrwm=171V, Vbr=190..210V, Ipp=5.5A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GHR	-	1.5SMCJ170A	TVS	Vrwm=170V, 5.5A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHR	-	1SMC170A	TVS	Vbr=189..209V, Vrwm=170V, 5.50A, 1500W(1ms)	403-01	3d	1a	Mot
GHR	-	5.0SMC200A	Zener diode	189.0..209.0V, Zzt=480Ω, Izt=5mA, 5W	DO-214AB	1d	1b	Rul
GHR	-	CD214C-T170A	TVS	Vrwm=170V, Irsm=5.5A, 1500W(1ms)	DO-214AB	1d	1a	Brn
GHR	-	SMCG170A	TVS	Vrwm=170V, 5.5A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GHR	-	SMCJ170A	TVS	Vrwm=170V, Vbr=189..217V, 5.5A, 1500W(1mS)	DO-214AB	1d	1m	Di
GHR	-	SMCJ170A	TVS	Vrwm=170V, Vbr=189..217V, 5.5A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GHR	-	SMCJ170CA	TVS	Vrwm=170V, Vbr=189..217V, 5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GHR	-	TV15C171J-G	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=5.45A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHR8	-	SM15T220A	TVS	Vrwm=188V, Vbr=209..231V, 4.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GHR8	-	SM15T220CA	TVS	Vrwm=188V, Vbr=209..231V, 4.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1l	Vs
GHS	-	1.5SMCJ180	TVS	Vrwm=180V, 4.7A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHS	-	SMCG188A	TVS	Vrwm=188V, 4.6A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GHS	-	SMCJ188	TVS	Vrwm=188V, Vbr=209..255V, 4.4A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GHS	-	SMCJ188CA	TVS	Vrwm=188V, Vbr=209..255V, 4.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GHS	-	TV15C181K-G	TVS	Vrwm=180.0V, Vbr=200.16..244.8V, Ipp=4.66A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHT	-	1.5SMC220A	TVS	Vrwm=185V, Vbr=209..231V, Ipp=4.6A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GHT	-	1.5SMCJ180A	TVS	Vrwm=180V, 5.1A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHT	-	SMCG188	TVS	Vrwm=188V, 4.4A, 1500W(1ms)	DO-215AB	5d	1k	Vs
GHT	-	SMCJ188A	TVS	Vrwm=188V, Vbr=209..255V, 4.6A, 1500W(1ms)	DO-214AB	1d	1k	Vs
GHT	-	SMCJ188C	TVS	Vrwm=188V, Vbr=209..255V, 4.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
GHT	-	SMCJ190A	TVS	Vrwm=190V, Vbr=211..232V, 4.87A, 1500W(1mS)	DO-214AB	1d	2m	Rul
GHT	-	TV15C181J-G	TVS	Vrwm=180.0V, Vbr=200.0..220.0 V, Ipp=5.14A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHU	-	1.5SMCJ190	TVS	Vrwm=170V, 4.4A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHU	-	TV15C191K-G	TVS	Vrwm=190.0V, Vbr=211.28..258.40V, Ipp=4.41A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHV	-	1.5SMCJ190A	TVS	Vrwm=170V, 4.8A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHV	-	SMCJ200A	TVS	Vrwm=200V, Vbr=224..247V, 4.6A, 1500W(1mS)	DO-214AB	1d	2m	Rul
GHV	-	TV15C191J-G	TVS	Vrwm=190.0V, Vbr=211.0..232.0V, Ipp=4.87A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHW	-	1.5SMCJ200	TVS	Vrwm=200V, 4.1A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHW	-	TV15C201J-G	TVS	Vrwm=200.0V, Vbr=224.0..247.0V, Ipp=4.60A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHX	-	1.5SMC250A	TVS	Vrwm=214V, Vbr=237..263V, Ipp=4.5A, 1500W(1ms)	DO-214AB	1d	1b	Rul
GHX	-	1.5SMCJ200A	TVS	Vrwm=200V, 4.6A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHX	-	SMCJ220A	TVS	Vrwm=220V, Vbr=246..272V, 4.2A, 1500W(1mS)	DO-214AB	1d	2m	Rul
GHX	-	TV15C221J-G	TVS	Vrwm=220.0V, Vbr=246.0..272.0V, Ipp=4.20A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GHY	-	1.5SMCJ210	TVS	Vrwm=210V, 4A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHZ	-	1.5SMCJ210A	TVS	Vrwm=210V, 4.4A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GHZ	-	SMCJ250A	TVS	Vrwm=250V, Vbr=279..309V, 3.7A, 1500W(1mS)	DO-214AB	1d	2m	Rul
GHZ	-	TV15C251J-G	TVS	Vrwm=250.0V, Vbr=279.0..309.0V, Ipp=3.70A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GI	-	3T180A	Thy-SPD	Vdrm=160V, Vs=220V, Ipp=50A, 40pF	DO-214AA	1d	1a	Mde
GI	-	P1800SA	Thy-SPD	Vdrm=160V, Vs=220V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GI	-	T180AB-LC	Thy-SPD	V Of-St=160V, Vs=220V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GID	-	1.5SMCJ220	TVS	Vrwm=220V, 3.8A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GIE	-	1.5SMCJ220A	TVS	Vrwm=220V, 4.2A, 1500W(1ms)	DO-214AB	1d	1a	Pjt
GIL	-	3T180ALC	Thy-SPD	Vdrm=160V, Vs=220V, Ipp=2.2A(1ms), 40pF	DO-214AA	1d	1a	Lfr
GJ	-	3T230A	Thy-SPD	Vdrm=190V, Vs=260V, Ipp=50A, 30pF	DO-214AA	1d	1a	Mde
GJ	-	GF1J	Si-diode	Rectifier, 600V, 1A, Vf<1.1V(1A), 2µs	DO-214BA	1d	1k	Vs
GJ	-	P2300SA	Thy-SPD	Vdrm=190V, Vs=260V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GJ	-	PZU10B	Zener diode	9.45..10.55, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GJ	-	T230AB-LC	Thy-SPD	V Of-St=190V, Vs=260V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GJE	-	SMCJ300A	TVS	Vrwm=300V, Vbr=335..371V, 3.1A, 1500W(1mS)	DO-214AB	1d	2m	Rul
GJE	-	TV15C301J-G	TVS	Vrwm=300.0V, Vbr=335.0..371.0V, Ipp=3.10A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GJG	-	SMCJ350A	TVS	Vrwm=350V, Vbr=391..432V, 2.6A, 1500W(1mS)	DO-214AB	1d	2m	Rul
GJG	-	TV15C351J-G	TVS	Vrwm=350.0V, Vbr=391.0..432.0V, Ipp=2.60A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GJK	-	SMCJ400A	TVS	Vrwm=400V, Vbr=447..494V, 2.3A, 1500W(1mS)	DO-214AB	1d	2m	Rul
GJK	-	TV15C401J-G	TVS	Vrwm=400.0V, Vbr=447.0..494.0V, Ipp=2.30A, 1500W(1ms)	DO-214AB	1d	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
GJL	-	3T230ALC	Thy-SPD	Vdrm=190V, Vs=260V, Ipp=2.2A(1ms), 30pF	DO-214AA	1d	1a	Lfr
GJM	-	SMCJ440A	TVS	Vrwm=440V, Vbr=492..543V, 2.1A, 1500W(1mS)	DO-214AB	1d	2m	Rul
GJM	-	TV15C441J-G	TVS	Vrwm=440.0V, Vbr=492.0..543.0V, Ipp=2.10A, 1500W(1ms)	DO-214AB	1d	2o	Cmc
GK	-	3T260A	Thy-SPD	Vdrm=220V, Vs=300V, Ipp=50A, 30pF	DO-214AA	1d	1a	Mde
GK	-	GF1K	Si-diode	Rectifier, 800V, 1A, Vf<1.2V(1A), 2µs	DO-214BA	1d	1k	Vs
GK	-	P2600SA	Thy-SPD	Vdrm=220V, Vs=300V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GK	-	PZU11B	Zener diode	10.44..11.56V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GK	-	SM6T150	TVS	Vrwm=128V, Vbr=143..158V, 2.9A, 600W(1ms)	DO-214AA	1d	1q	Ste
GK	-	T260AB-LC	Thy-SPD	V Of-St=220V, Vs=300V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GK	-	Z2SMB11	Zener diode	11V±5%, Izt=50mA, 2W	DO-214AA	1d	2j	Fag
GKJ	-	1.5SMC150A	TVS	Vrwm=128V, Vbr=143..158V, Ipp=7.2A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
GKL	-	3T260ALC	Thy-SPD	Vdrm=220V, Vs=300V, Ipp=2.2A(1ms), 30pF	DO-214AA	1d	1a	Lfr
GL	-	3T310A	Thy-SPD	Vdrm=275V, Vs=350V, Ipp=50A, 30pF	DO-214AA	1d	1a	Mde
GL	-	P3100SA	Thy-SPD	Vdrm=275V, Vs=350V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GL	-	PZU12B	Zener diode	11.42..12.6V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GL	-	SM6T150A	TVS	Vrwm=128V, Vbr=143..158V, 2.9A, 600W(1ms)	DO-214AA	1d	1a	Mde
GL	-	T310AB-LC	Thy-SPD	V Of-St=275V, Vs=350V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GL	-	Z2SMB12	Zener diode	12V±5%, Izt=50mA, 2W	DO-214AA	1d	2j	Fag
GLJ	-	1.5SMC160	TVS	Vrwm=130V, Vbr=144..176V, Ipp=6.5A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
GLL	-	3T310ALC	Thy-SPD	Vdrm=275V, Vs=350V, Ipp=2.2A(1ms), 30pF	DO-214AA	1d	1a	Lfr
GM	-	3T350A	Thy-SPD	Vdrm=300V, Vs=400V, Ipp=50A, 30pF	DO-214AA	1d	1a	Mde
GM	-	GF1M	Si-diode	Rectifier, 1000V, 1A, Vf<1.2V(1A), 2µs	DO-214BA	1d	1k	Vs
GM	-	P3500SA	Thy-SPD	Vdrm=300V, Vs=400V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GM	-	PZU13B	Zener diode	12.47..13.96V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GM	-	SS2020FL	Si-diode	SBR, 20V, 2A, Vf<0.55V(2A)	SOD-123FL	7d	1a	Pjt
GM	-	T350AB-LC	Thy-SPD	V Of-St=300V, Vs=400V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GM	-	Z2SMB13	Zener diode	13V±5%, Izt=50mA, 2W	DO-214AA	1d	2j	Fag
GMJ	-	1.5SMC160A	TVS	Vrwm=136V, Vbr=152..168V, Ipp=6.8A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
GML	-	3T350ALC	Thy-SPD	Vdrm=300V, Vs=400V, Ipp=2.2A(1ms), 30pF	DO-214AA	1d	1a	Lfr
GN	-	3T400B	Thy-SPD	Vdrm=360V, Vs=400V, Ipp=75A, 40pF	DO-214AA	1d	1a	Mde
GN	-	P4000SB	Thy-SPD	Vdrm=360V, Vs=450V, Ipp=80A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GN	-	PZU15B	Zener diode	13.84..15.52V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GN	-	SS2030FL	Si-diode	SBR, 30V, 2A, Vf<0.55V(2A)	SOD-123FL	7d	1a	Pjt
GN	-	T400BB-LC	Thy-SPD	V Of-St=360V, Vs=400V, Ipp=75A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GN	-	Z2SMB15	Zener diode	15V±5%, Izt=50mA, 2W	DO-214AA	1d	2j	Fag
GNJ	-	1.5SMC170	TVS	Vrwm=138V, Vbr=153..187V, Ipp=6.2A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
GO	-	3T400A	Thy-SPD	Vdrm=360V, Vs=450V, Ipp=50A, 30pF	DO-214AA	1d	1a	Mde
GO	-	P4000SA	Thy-SPD	Vdrm=360V, Vs=450V, Ipp=35A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GO	-	T400AB-LC	Thy-SPD	V Of-St=360V, Vs=450V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GP	-	3T064B	Thy-SPD	Vdrm=58V, Vs=77V, Ipp=100A, 60pF	DO-214AA	1d	1a	Mde
GP	-	CMDZ3L6	Zener diode	3.420..3.780V, Izt=0.5mA, Zzt=900Ω, 250mW	SOD-323	5d	1a	Cen
GP	-	KDZ11FVY	Zener diode	10.76..11.22V, Izt=5mA, Zzt=15Ω, 100mW	TFSC	7d	1a	Kec
GP	-	P0640SB	Thy-SPD	Vdrm=58V, Vs=77V, Ipp=80A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GP	-	PZU16B	Zener diode	15.37..17.09V, Zzt=20Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GP	-	SS2040FL	Si-diode	SBR, 40V, 2A, Vf<0.55V(2A)	SOD-123FL	7d	1a	Pjt
GP	-	Z2SMB16	Zener diode	16V±5%, Izt=25mA, 2W	DO-214AA	1d	2j	Fag
GPJ	-	1.5SMC170A	TVS	Vrwm=145V, Vbr=162..179V, Ipp=6.4A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
GPL	-	3T064BLC	Thy-SPD	Vdrm=58V, Vs=77V, Ipp=2.2A(1ms), 60pF	DO-214AA	1d	1a	Lfr
GQ	-	3T072B	Thy-SPD	Vdrm=65V, Vs=88V, Ipp=100A, 60pF	DO-214AA	1d	1a	Mde
GQ	-	P0720SB	Thy-SPD	Vdrm=65V, Vs=88V, Ipp=80A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GQ	-	PZU18B	Zener diode	16.94..19.03V, Zzt=20Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GQ	-	SS2060FL	Si-diode	SBR, 60V, 2A, Vf<0.70V(2A)	SOD-123FL	7d	1a	Pjt
GQ	-	Z2SMB18	Zener diode	18V±5%, Izt=25mA, 2W	DO-214AA	1d	2j	Fag
GQJ	-	1.5SMC180	TVS	Vrwm=146V, Vbr=162..198V, Ipp=5.8A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
GQL	-	3T072BLC	Thy-SPD	Vdrm=65V, Vs=88V, Ipp=2.2A(1ms), 60pF	DO-214AA	1d	1a	Lfr
GR	-	3T080B	Thy-SPD	Vdrm=75V, Vs=98V, Ipp=100A, 60pF	DO-214AA	1d	1a	Mde
GR	-	P0800SB	Thy-SPD	Vdrm=75V, Vs=98V, Ipp=80A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GR	-	PZU20B	Zener diode	18.86..21.08V, Zzt=20Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GR	-	SS20100FL	Si-diode	SBR, 100V, 2A, Vf<0.85V(2A)	SOD-123FL	7d	1a	Pjt
GR	-	Z2SMB20	Zener diode	20V±5%, Izt=25mA, 2W	DO-214AA	1d	2j	Fag
GRJ	-	1.5SMC180A	TVS	Vrwm=154V, Vbr=171..189V, Ipp=6.1A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
GRL	-	3T080BLC	Thy-SPD	Vdrm=75V, Vs=98V, Ipp=2.2A(1ms), 60pF	DO-214AA	1d	1a	Lfr
GS	-	3T110B	Thy-SPD	Vdrm=90V, Vs=130V, Ipp=100A, 60pF	DO-214AA	1d	1a	Mde
GS	-	P1100SB	Thy-SPD	Vdrm=90V, Vs=130V, Ipp=80A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GS	-	PZU22B	Zener diode	20.88..23.17V, Zzt=25Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GS	-	T110BB-LC	Thy-SPD	V Of-St=90V, Vs=130V, Ipp=75A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GS	-	Z2SMB22	Zener diode	22V±5%, Izt=25mA, 2W	DO-214AA	1d	2j	Fag
GSJ	-	1.5SMC200	TVS	Vrwm=162V, Vbr=180..220V, Ipp=5.2A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
GSL	-	3T110BLC	Thy-SPD	Vdrm=90V, Vs=130V, Ipp=2.2A(1ms), 60pF	DO-214AA	1d	1a	Lfr
GT	-	3T130B	Thy-SPD	Vdrm=120V, Vs=160V, Ipp=100A, 40pF	DO-214AA	1d	1a	Mde

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
GT	-	P1300SB	Thy-SPD	Vdrm=120V, Vs=160V, Ipp=80A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GT	-	PZU24B3	Zener diode	24.54..25.57V, Zzt=30Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GT	-	SM6T200	TVS	Vrwm=171V, Vbr=190..210V, 2.2A, 600W(1ms)	DO-214AA	1d	1q	Ste
GT	-	T130BB-LC	Thy-SPD	V Of-St=120V, Vs=160V, Ipp=75A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GT	-	Z2SMB24	Zener diode	24V±5%, Izt=25mA, 2W	DO-214AA	1d	2j	Fag
GTJ	-	1.5SMC200A	TVS	Vrwm=171V, Vbr=190..210V, Ipp=5.5A, 1500W(1ms)	DO-214AB	1d	1b	Tsc
GTL	-	3T130BLC	Thy-SPD	Vdrm=120V, Vs=160V, Ipp=2.2A(1ms), 60pF	DO-214AA	1d	1a	Lfr
GU	-	3T150B	Thy-SPD	Vdrm=140V, Vs=180V, Ipp=100A, 40pF	DO-214AA	1d	1a	Mde
GU	-	P1500SB	Thy-SPD	Vdrm=140V, Vs=180V, Ipp=80A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GU	-	PZU27B	Zener diode	25.1..28.9V, Zzt=40Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GU	-	SM6T200A	TVS	Vrwm=171V, Vbr=190..210V, 2.2A, 600W(1ms)	DO-214AA	1d	1a	Mde
GU	-	SS3040FL-F	Si-diode	SBR, 40V, 2.4A, Vf<0.55V(3A)	SOD-123FL	7d	1a	Pjt
GU	-	T150BB-LC	Thy-SPD	V Of-St=140V, Vs=180V, Ipp=75A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GU	-	Z2SMB27	Zener diode	27V±5%, Izt=25mA, 2W	DO-214AA	1d	2j	Fag
GUA	-	SMCJ60A	TVS	Vrwm=60V, Vbr=66.7..76.7V, 15.7A, 1500W(1ms)	DO-214AB	1d	1q	Ste
GUB	-	SMCJ70A	TVS	Vrwm=70V, Vbr=77.8..89.5V, 13.9A, 1500W(1ms)	DO-214AB	1d	1q	Ste
GUE	-	SMCJ85A	TVS	Vrwm=85V, Vbr=94.4..115V, 11.5A, 1500W(1ms)	DO-214AB	1d	1q	Ste
GUG	-	SMCJ100A	TVS	Vrwm=100V, Vbr=111..136V, 9.7A, 1500W(1ms)	DO-214AB	1d	1q	Ste
GUI	-	SMCJ130A	TVS	Vrwm=130V, Vbr=144..176V, 7.5A, 1500W(1ms)	DO-214AB	1d	1q	Ste
GUL	-	3T150BLC	Thy-SPD	Vdrm=140V, Vs=180V, Ipp=2.2A(1ms), 40pF	DO-214AA	1d	1a	Lfr
GUL	-	SMCJ154A	TVS	Vrwm=154V, Vbr=168..193.5V, 6.1A, 1500W(1ms)	DO-214AB	1d	1q	Ste
GUM	-	SMCJ170A	TVS	Vrwm=170V, Vbr=189..217V, 5.7A, 1500W(1ms)	DO-214AB	1d	1q	Ste
GUN	-	SMCJ188A	TVS	Vrwm=188V, Vbr=209..255V, 4.6A, 1500W(1ms)	DO-214AB	1d	1q	Ste
GV	-	3T180B	Thy-SPD	Vdrm=160V, Vs=220V, Ipp=100A, 40pF	DO-214AA	1d	1a	Mde
GV	-	P1800SB	Thy-SPD	Vdrm=160V, Vs=220V, Ipp=80A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GV	-	PZU30B	Zener diode	28..32V, Zzt=40Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GV	-	SM6T220	TVS	Vrwm=188V, Vbr=209..231V, 2.0A, 600W(1ms)	DO-214AA	1d	1q	Ste
GV	-	T180BB-LC	Thy-SPD	V Of-St=160V, Vs=220V, Ipp=75A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GV	-	Z2SMB30	Zener diode	30V±5%, Izt=25mA, 2W	DO-214AA	1d	2j	Fag
GVL	-	3T180BLC	Thy-SPD	Vdrm=160V, Vs=220V, Ipp=2.2A(1ms), 40pF	DO-214AA	1d	1a	Lfr
GW	-	3T230B	Thy-SPD	Vdrm=190V, Vs=260V, Ipp=100A, 30pF	DO-214AA	1d	1a	Mde
GW	-	P2300SB	Thy-SPD	Vdrm=190V, Vs=260V, Ipp=80A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GW	-	PZU33B	Zener diode	31..35V, Zzt=40Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GW	-	SM6T220A	TVS	Vrwm=188V, Vbr=209..231V, 2.0A, 600W(1ms)	DO-214AA	1d	1a	Mde
GW	-	T230BB-LC	Thy-SPD	V Of-St=190V, Vs=260V, Ipp=75A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GW	-	Z2SMB33	Zener diode	33V±5%, Izt=25mA, 2W	DO-214AA	1d	2j	Fag
GWL	-	3T230BLC	Thy-SPD	Vdrm=190V, Vs=260V, Ipp=2.2A(1ms), 30pF	DO-214AA	1d	1a	Lfr
GX	-	3T260B	Thy-SPD	Vdrm=220V, Vs=300V, Ipp=100A, 30pF	DO-214AA	1d	1a	Mde
GX	-	DDZ14	Zener diode	14V±10%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
GX	-	DDZ14S	Zener diode	14V±10%, Izt=10mA, 200mW	SOD-323	5d	1d	Di
GX	-	P2600SB	Thy-SPD	Vdrm=220V, Vs=300V, Ipp=80A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GX	-	PZU36B	Zener diode	34..38V, Zzt=60Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
GX	-	T260BB-LC	Thy-SPD	V Of-St=220V, Vs=300V, Ipp=75A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GX	-	Z2SMB36	Zener diode	36V±5%, Izt=10mA, 2W	DO-214AA	1d	2j	Fag
GXL	-	3T260BLC	Thy-SPD	Vdrm=220V, Vs=300V, Ipp=2.2A(1ms), 30pF	DO-214AA	1d	1a	Lfr
GY	-	3T310B	Thy-SPD	Vdrm=275V, Vs=350V, Ipp=100A, 30pF	DO-214AA	1d	1a	Mde
GY	-	DDZ15	Zener diode	15V±10%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
GY	-	DDZ15S	Zener diode	15V±10%, Izt=10mA, 200mW	SOD-323	5d	1d	Di
GY	-	KDZ3.6VVY	Zener diode	3.60..3.84 5V, Izt=5mA, Zzt=130Ω, 100mW	VSC	7d	1a	Kec
GY	-	P3100SB	Thy-SPD	Vdrm=275V, Vs=350V, Ipp=80A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GY	-	T310BB-LC	Thy-SPD	V Of-St=275V, Vs=350V, Ipp=75A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GY	-	Z2SMB39	Zener diode	39V±5%, Izt=10mA, 2W	DO-214AA	1d	2j	Fag
GYL	-	3T310BLC	Thy-SPD	Vdrm=275V, Vs=350V, Ipp=2.2A(1ms), 30pF	DO-214AA	1d	1a	Lfr
GZ	-	3T350B	Thy-SPD	Vdrm=300V, Vs=400V, Ipp=100A, 30pF	DO-214AA	1d	1a	Mde
GZ	-	BZT52B11S	Zener diode	10.78..11.22V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323FL	7d	1a	Tsc
GZ	-	MM3Z11VB	Zener diode	10.78..11.22V, Zzt=18Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
GZ	-	MM3Z11VBW	Zener diode	10.78..11.22V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323FL	7d	1a	Tac
GZ	-	P3500SB	Thy-SPD	Vdrm=300V, Vs=400V, Ipp=80A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
GZ	-	T350BB-LC	Thy-SPD	V Of-St=300V, Vs=400V, Ipp=75A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
GZ	-	TCMM3Z11VB	Zener diode	11V±2%, Izt=5mA, Zzt=18Ω, 200mW	SOD-323FL	7d	1a	Tac
GZ	-	Z2SMB43	Zener diode	43V±5%, Izt=10mA, 2W	DO-214AA	1d	2j	Fag
GZL	-	3T350BLC	Thy-SPD	Vdrm=300V, Vs=400V, Ipp=2.2A(1ms), 30pF	DO-214AA	1d	1a	Lfr
H	-	BB141	C-diode	VCO, 6V, 20mA, 2.38/4.2pF(4V/1V, 1MHz), <0.4Ω	SOD-523	6d	1a	Phi
h	-	BBY66-02V	C-diode	VCO-tuning, 12V, 50mA, 12.7..68.7pF(4.5..1V)	SC-79	6d	1u	Inf
H	-	CDZ8.2B	Zener diode	8.2V±2.5%, Izt=40mA, 1W	VMN	7d	1s	Rhm
H	-	CH025S-40GP	Si-diode	SBD, 40V, 250mA, Vf<0.6V(200mA), 10ns	SOD-523	6d	1a	Chm
H	-	EP05Q03L	Si-diode	SBR, 30V, 500mA, Vf<0.45V(500mA)	SOD-123	5d	1a	Nih
H	-	GBLC24I	TVS	Vrwm=24V, 1A, 350W(1ms)	SOD-323	5d	1a	Prt
H	-	HVU354	C-diode	VCO, 10V, 16/18.5pF(1V)	SOD-323	5d	1a	Ren
H	-	MAZD047	Zener diode	4.4..5V, Zzt=80Ω(5mA), 120mW	SSSMini2	7d	1a	Pan

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
H	-	MAZF091	Zener diode	8.5..9.6V, Zzt=20Ω(5mA), 120mW	S-Mini	8d	1a	Pan
H	-	MAZN091	Zener diode	8.5..9.6V, Zzt=20Ω(5mA), 120mW	SSMini2	7d	1a	Pan
H	-	MAZS036	Zener diode	3.4..3.8V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
h	-	MMSZ5238BPT	Zener diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 225mW	SOD-523	6d	1a	Chm
H	au	MMSZ5258BPT	Zener diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 225mW	SOD-523	6d	1a	Chm
h.	-	MMSZ5238SPT	Zener diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 225mW	SOD-523	6d	1a	Chm
H.	au	MMSZ5258SPT	Zener diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 225mW	SOD-523	6d	1a	Chm
H.0	-	MMSZ5245C-V-G	Zener diode	15V±2%, Izt=8.5mA, Zzt=16Ω, 500mW	SOD-123	5d	1kb	Vs
H.6	-	MMSZ5241C-V-G	Zener diode	11V±2%, Izt=20mA, Zzt=22Ω, 500mW	SOD-123	5d	1kb	Vs
H.7	-	MMSZ5242C-V-G	Zener diode	12V±2%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123	5d	1kb	Vs
H.8	-	MMSZ5243C-V-G	Zener diode	13V±2%, Izt=9.5mA, Zzt=13Ω, 500mW	SOD-123	5d	1kb	Vs
H.9	-	MMSZ5244C-V-G	Zener diode	14V±2%, Izt=9mA, Zzt=15Ω, 500mW	SOD-123	5d	1kb	Vs
H^	-	MAZS0360H	Zener diode	3.55..3.8V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
H_	-	MAZS0360L	Zener diode	3.4..3.65V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
H0	-	BZD27C160P	Zener diode	153..171V, Zzt=150Ω, Izt=5mA, 800mW	SOD-123FL	7d	1i	Vs
H0	-	BZX585-C15	Zener diode	15V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
H0	-	CMOZ15V	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 250mW	SOD-523	6d	1a	Cen
H0	-	MMPZ5253BPT	Zener diode	23.75..26.25V, Izt=5mA, Zzt=62Ω, 225mW	SOD-323	5d	1a	Chm
H0	-	MMSZ5245B-V-G	Zener diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 500mW	SOD-123	5d	1kb	Vs
H1	-	BZD27C180P	Zener diode	168..191V, Zzt=180Ω, Izt=5mA, 800mW	SOD-123FL	7d	1i	Vs
H1	-	BZD27C180P	Zener diode	168..191V, Zzt=280Ω, Izt=4mA, 1W	SOD-123FL	7d	2u	Tsc
H1	-	BZX585-C6V2	Zener diode	6.2V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
H1	-	CMOZ6V2	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 250mW	SOD-523	6d	1a	Cen
H1	-	CURMT101-HF	Si-diode	U-fast Rec. Rect., 50V, 1A, Vf<1V(1A), 50ns	SOD-123H	10d	1a	Cmc
H1	-	CZRH5241B-G	Zener diode	10.45..11.55V, Zzt=22Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
H1	-	CZRV5241B-G	Zener diode	10.45..11.55V, Zzt=22Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
H1	-	CZRW5241B-G	Zener diode	10.45..11.55V, Zzt=22Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
H1	-	LMSZ5241BT1G	Zener diode	10.45..11.55V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
H1	-	MM3Z5229B	Zener diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOD-323FL	7d	1a	Bts
H1	-	MM3Z5229BH	Zener diode	4.09..4.52V, Izt=20mA, Zzt=22Ω, 300mW	SOD-323	5d	1a	Zow
H1	-	MM3Z5241B	Zener diode	10.45..11.55V, Izt=20mA, Zzt=22Ω, 200mW	SOD-323	5d	1a	Ext
H1	-	MMBZ5241BV	Zener diode	11V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOD-523	6d	1a	Pjt
H1	-	MMSZ5241B	Zener diode	11V±5%, Izt=20mA, Zzt=22Ω, 500mW	SOD-123	5d	1d	Di
H1	-	MMSZ5241B-F	Zener diode	10.45..11.55V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr
H1	-	MMSZ5241BS	Zener diode	11V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOD-323	5d	1d	Di
H1	-	MMSZ5241BWS	Zener diode	10.45..11.55V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
H1	-	OYD11VT1	Zener diode	10.4...11.6V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Ouy
H1	-	PZU2.7B2	Zener diode	2.65..2.9V, Zzt=100Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
H1	ag	MMSZ5241B	Zener diode	11V±5%, Izt=20mA, Zzt=22Ω, 500mW	SOD-123	5d	1d	Di
H11	-	HSM11SPT	Si-diode	Rectifer, U-fast, 50V, 1A	SOD-123S	7d	1a	Chm
H12	-	HSM12SPT	Si-diode	Rectifer, U-fast, 100V, 1A	SOD-123S	7d	1a	Chm
H13	-	HSM13SPT	Si-diode	Rectifer, U-fast, 200V, 1A	SOD-123S	7d	1a	Chm
H13B	-	3SMAJ5913B	Zener diode	3.3V±5%, Izt=113.6mA, Zzt=10.0Ω, 3W	DO-214AC	1d	1w	Mco
H13B	-	3SMBJ5913B	Zener diode	3.3V±5%, Izt=113.6mA, Zzt=10.0Ω, 3W	DO-214AA	1d	1w	Mco
H14	-	HSM14SPT	Si-diode	Rectifer, U-fast, 300V, 1A	SOD-123S	7d	1a	Chm
H14B	-	3SMAJ5914B	Zener diode	3.6V±5%, Izt=104.2mA, Zzt=9.0Ω, 3W	DO-214AC	1d	1w	Mco
H14B	-	3SMBJ5914B	Zener diode	3.6V±5%, Izt=104.2mA, Zzt=9.0Ω, 3W	DO-214AA	1d	1w	Mco
H15	-	HSM15SPT	Si-diode	Rectifer, U-fast, 400V, 1A	SOD-123S	7d	1a	Chm
H15B	-	3SMAJ5915B	Zener diode	3.9V±5%, Izt=96.1mA, Zzt=7.5Ω, 3W	DO-214AC	1d	1w	Mco
H15B	-	3SMBJ5915B	Zener diode	3.9V±5%, Izt=96.1mA, Zzt=7.5Ω, 3W	DO-214AA	1d	1w	Mco
H16	-	HSM16SPT	Si-diode	Rectifer, U-fast, 600V, 1A	SOD-123S	7d	1a	Chm
H16B	-	3SMAJ5916B	Zener diode	4.3V±5%, Izt=87.2mA, Zzt=6.0Ω, 3W	DO-214AC	1d	1w	Mco
H16B	-	3SMBJ5916B	Zener diode	4.3V±5%, Izt=87.2mA, Zzt=6.0Ω, 3W	DO-214AA	1d	1w	Mco
H17	-	HSM17SPT	Si-diode	Rectifer, U-fast, 800V, 1A	SOD-123S	7d	1a	Chm
H17B	-	3SMAJ5917B	Zener diode	4.7V±5%, Izt=79.8mA, Zzt=5.0Ω, 3W	DO-214AC	1d	1w	Mco
H17B	-	3SMBJ5917B	Zener diode	4.7V±5%, Izt=79.8mA, Zzt=5.0Ω, 3W	DO-214AA	1d	1w	Mco
H18	-	HSM18SPT	Si-diode	Rectifer, U-fast, 1000V, 1A	SOD-123S	7d	1a	Chm
H18B	-	3SMAJ5918B	Zener diode	5.1V±5%, Izt=73.5mA, Zzt=4.0Ω, 3W	DO-214AC	1d	1w	Mco
H18B	-	3SMBJ5918B	Zener diode	5.1V±5%, Izt=73.5mA, Zzt=4.0Ω, 3W	DO-214AA	1d	1w	Mco
H19B	-	3SMAJ5919B	Zener diode	5.6V±5%, Izt=66.9mA, Zzt=2.0Ω, 3W	DO-214AC	1d	1w	Mco
H19B	-	3SMBJ5919B	Zener diode	5.6V±5%, Izt=66.9mA, Zzt=2.0Ω, 3W	DO-214AA	1d	1w	Mco
H2	-	BZD27C200P	Zener diode	188..212V, Zzt=200Ω, Izt=5mA, 800mW	SOD-123FL	7d	1i	Vs
H2	-	BZD27C200P	Zener diode	188..212V, Zzt=350Ω, Izt=4mA, 1W	SOD-123FL	7d	2u	Tsc
H2	-	BZX585-C6V8	Zener diode	6.8V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
H2	-	CMOZ6V8	Zener diode	6.46..7.14V, Izt=5mA, Zzt=15Ω, 250mW	SOD-523	6d	1a	Cen
H2	-	CURMT102-HF	Si-diode	U-fast Rec. Rect., 100V, 1A, Vf<1V(1A), 50ns	SOD-123H	10d	1a	Cmc
H2	-	CZRH5242B-G	Zener diode	11.4..12.6V, Zzt=30Ω, Izt=20mA, 150mW	SOD-523	6d	1a	Cmc
H2	-	CZRV5242B-G	Zener diode	11.4..12.6V, Zzt=30Ω, Izt=20mA, 200mW	SOD-323	5d	1a	Cmc
H2	-	CZRW5242B-G	Zener diode	11.40..12.60V, Zzt=30Ω, Izt=20mA, 500mW	SOD-123	5d	1a	Cmc
H2	-	EDZ7.5B	Zener diode	7.28..7.60V, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Rhm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
H2	-	EDZV7.5B	Zener diode	7.28..7.60V, Izt=5.0mA, Zzt=30Ω, 150mW	SOD-523	6d	2v	Rhm
H2	-	FDZ7.5EV	Zener diode	7.280..7.600V, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Fis
H2	-	FDZ7.5VT	Zener diode	7.280..7.600V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Fis
H2	-	LBZT52B7V5T1G	Zener diode	7.28..7.6V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
H2	-	LEDZ7.5BT1G	Zener diode	7.28..7.6V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
H2	-	LMSZ5242BT1G	Zener diode	11.4..12.6V, Izt=20mA, 500mW	SOD-123	5d	1d	Lrc
H2	-	LUDZS7.5BT1G	Zener diode	7.28..7.6V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
H2	-	MM3Z5242B	Zener diode	11.40..12.60V, Izt=20mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Ext
H2	-	MM3Z5250B	Zener diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 200mW	SOD-323FL	7d	1a	Bts
H2	-	MM3Z5250BH	Zener diode	19..21V, Izt=6.2mA, Zzt=25Ω, 300mW	SOD-323	5d	1a	Zow
H2	-	MMBZ5242BV	Zener diode	12V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-523	6d	1a	Pjt
H2	-	MMSZ5242B	Zener diode	12V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123	5d	1d	Di
H2	-	MMSZ5242B-F	Zener diode	11.40..12.60V, Izt=20mA, 500mW	SOD-123F	7d	1a	Ttr
H2	-	MMSZ5242BS	Zener diode	12V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-323	5d	1d	Di
H2	-	MMSZ5242BWS	Zener diode	11.40..12.60V, Izt=20mA, 200mW	SOD-323F	7d	1a	Ttr
H2	-	OYD12VT1	Zener diode	11.4...12.7V, Izt=5mA, Zzt=35Ω, 500mW	SOD-123	5d	1a	Ouy
H2	-	PZU3.0B2	Zener diode	2.95..3.2V, Zzt=95Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
H2	-	TDZ7.5B	Zener diode	7.5V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
H2	-	UDZS7.5B	Zener diode	7.28..7.60V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Wtr
H2	-	UDZS7.5B	Zener diode	7.5V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
H2	-	UDZV7.5B	Zener diode	7.28..7.60V, Izt=5.0mA, Zzt=30Ω, 200mW	SOD-323	5d	2v	Rhm
H2	-	VDZS7.5B	Zener diode	7.5V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
H2	ag	MMSZ5242B	Zener diode	12V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123	5d	1d	Di
H20B	-	3SMAJ5920B	Zener diode	6.2V±5%, Izt=60.5mA, Zzt=2.0Ω, 3W	DO-214AC	1d	1w	Mco
H20B	-	3SMBJ5920B	Zener diode	6.2V±5%, Izt=60.5mA, Zzt=2.0Ω, 3W	DO-214AA	1d	1w	Mco
H21B	-	3SMAJ5921B	Zener diode	6.8V±5%, Izt=55.1mA, Zzt=2.5Ω, 3W	DO-214AC	1d	1w	Mco
H21B	-	3SMBJ5921B	Zener diode	6.8V±5%, Izt=55.1mA, Zzt=2.5Ω, 3W	DO-214AA	1d	1w	Mco
H22B	-	3SMAJ5922B	Zener diode	7.5V±5%, Izt=50.0mA, Zzt=3.0Ω, 3W	DO-214AC	1d	1w	Mco
H22B	-	3SMBJ5922B	Zener diode	7.5V±5%, Izt=50.0mA, Zzt=3.0Ω, 3W	DO-214AA	1d	1w	Mco
H23B	-	3SMAJ5923B	Zener diode	8.2V±5%, Izt=45.7mA, Zzt=3.5Ω, 3W	DO-214AC	1d	1w	Mco
H23B	-	3SMBJ5923B	Zener diode	8.2V±5%, Izt=45.7mA, Zzt=3.5Ω, 3W	DO-214AA	1d	1w	Mco
H24B	-	3SMAJ5924B	Zener diode	9.1V±5%, Izt=41.2mA, Zzt=4.0Ω, 3W	DO-214AC	1d	1w	Mco
H24B	-	3SMBJ5924B	Zener diode	9.1V±5%, Izt=41.2mA, Zzt=4.0Ω, 3W	DO-214AA	1d	1w	Mco
H25B	-	3SMAJ5925B	Zener diode	10V±5%, Izt=37.5mA, Zzt=4.5Ω, 3W	DO-214AC	1d	1w	Mco
H25B	-	3SMBJ5925B	Zener diode	10V±5%, Izt=37.5mA, Zzt=4.5Ω, 3W	DO-214AA	1d	1w	Mco
H26B	-	3SMAJ5926B	Zener diode	11V±5%, Izt=34.1mA, Zzt=5.5Ω, 3W	DO-214AC	1d	1w	Mco
H26B	-	3SMBJ5926B	Zener diode	11V±5%, Izt=34.1mA, Zzt=5.5Ω, 3W	DO-214AA	1d	1w	Mco
H27B	-	3SMAJ5927B	Zener diode	12V±5%, Izt=31.2mA, Zzt=6.5Ω, 3W	DO-214AC	1d	1w	Mco
H27B	-	3SMBJ5927B	Zener diode	12V±5%, Izt=31.2mA, Zzt=6.5Ω, 3W	DO-214AA	1d	1w	Mco
H28B	-	3SMAJ5928B	Zener diode	13V±5%, Izt=28.8mA, Zzt=7.0Ω, 3W	DO-214AC	1d	1w	Mco
H28B	-	3SMBJ5928B	Zener diode	13V±5%, Izt=28.8mA, Zzt=7.0Ω, 3W	DO-214AA	1d	1w	Mco
H29B	-	3SMAJ5929B	Zener diode	15V±5%, Izt=25.0mA, Zzt=9.0Ω, 3W	DO-214AC	1d	1w	Mco
H29B	-	3SMBJ5929B	Zener diode	15V±5%, Izt=25.0mA, Zzt=9.0Ω, 3W	DO-214AA	1d	1w	Mco
H3	-	BZD27C220P	Zener diode	208..233V, Zzt=430Ω, Izt=4mA, 1W	SOD-123FL	7d	2u	Tsc
H3	-	BZX585-C7V5	Zener diode	7.5V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
H3	-	CMOZ7V5	Zener diode	7.12..7.88V, Izt=5mA, Zzt=15Ω, 250mW	SOD-523	6d	1a	Cen
H3	-	CURMT103-HF	Si-diode	U-fast Rec. Rect., 200V, 1A, Vf<1V(1A), 50ns	SOD-123H	10d	1a	Cmc
H3	-	CZRH5243B-G	Zener diode	12.35..13.65V, Zzt=13Ω, Izt=9.5mA, 150mW	SOD-523	6d	1a	Cmc
H3	-	CZRV5243B-G	Zener diode	12.35..13.65V, Zzt=13Ω, Izt=9.5mA, 200mW	SOD-323	5d	1a	Cmc
H3	-	CZRW5243B-G	Zener diode	12.35..13.65V, Zzt=13Ω, Izt=9.5mA, 500mW	SOD-123	5d	1a	Cmc
H3	-	LMSZ5243BT1G	Zener diode	12.35..13.65V, Izt=9.5mA, 500mW	SOD-123	5d	1d	Lrc
H3	-	MM3Z5243B	Zener diode	12.35..13.65V, Izt=9.5mA, Zzt=13Ω, 200mW	SOD-323	5d	1a	Ext
H3	-	MMBZ5243BV	Zener diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 200mW	SOD-523	6d	1a	Pjt
H3	-	MMSZ5243B	Zener diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 500mW	SOD-123	5d	1d	Di
H3	-	MMSZ5243B-F	Zener diode	12.35..13.65V, Izt=9.5mA, 500mW	SOD-123F	7d	1a	Ttr
H3	-	MMSZ5243BS	Zener diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 200mW	SOD-323	5d	1d	Di
H3	-	MMSZ5243BWS	Zener diode	12.35..13.65V, Izt=9.5mA, 200mW	SOD-323F	7d	1a	Ttr
H3	-	OYD13VT1	Zener diode	12.4...14.1V, Izt=5mA, Zzt=35Ω, 500mW	SOD-123	5d	1a	Ouy
H3	-	PZU3.3B2	Zener diode	3.25..3.5V, Zzt=95Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
H3	ag	MMSZ5243B	Zener diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 500mW	SOD-123	5d	1d	Di
H30B	-	3SMAJ5930B	Zener diode	16V±5%, Izt=23.4mA, Zzt=10.0Ω, 3W	DO-214AC	1d	1w	Mco
H30B	-	3SMBJ5930B	Zener diode	16V±5%, Izt=23.4mA, Zzt=10.0Ω, 3W	DO-214AA	1d	1w	Mco
H31B	-	3SMAJ5931B	Zener diode	18V±5%, Izt=20.8mA, Zzt=12.0Ω, 3W	DO-214AC	1d	1w	Mco
H31B	-	3SMBJ5931B	Zener diode	18V±5%, Izt=20.8mA, Zzt=12.0Ω, 3W	DO-214AA	1d	1w	Mco
H32B	-	3SMAJ5932B	Zener diode	20V±5%, Izt=18.7mA, Zzt=14.0Ω, 3W	DO-214AC	1d	1w	Mco
H32B	-	3SMBJ5932B	Zener diode	20V±5%, Izt=18.7mA, Zzt=14.0Ω, 3W	DO-214AA	1d	1w	Mco
H33B	-	3SMAJ5933B	Zener diode	22V±5%, Izt=17.0mA, Zzt=17.5Ω, 3W	DO-214AC	1d	1w	Mco
H33B	-	3SMBJ5933B	Zener diode	22V±5%, Izt=17.0mA, Zzt=17.5Ω, 3W	DO-214AA	1d	1w	Mco
H34B	-	3SMAJ5934B	Zener diode	24V±5%, Izt=15.6mA, Zzt=19.0Ω, 3W	DO-214AC	1d	1w	Mco
H34B	-	3SMBJ5934B	Zener diode	24V±5%, Izt=15.6mA, Zzt=19.0Ω, 3W	DO-214AA	1d	1w	Mco

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
H35B	-	3SMAJ5935B	Zener diode	27V±5%, Izt=13.9mA, Zzt=23.0Ω, 3W	DO-214AC	1d	1w	Mco
H35B	-	3SMBJ5935B	Zener diode	27V±5%, Izt=13.9mA, Zzt=23.0Ω, 3W	DO-214AA	1d	1w	Mco
H36B	-	3SMAJ5936B	Zener diode	30V±5%, Izt=12.5mA, Zzt=28.0Ω, 3W	DO-214AC	1d	1w	Mco
H36B	-	3SMBJ5936B	Zener diode	30V±5%, Izt=12.5mA, Zzt=28.0Ω, 3W	DO-214AA	1d	1w	Mco
H37B	-	3SMAJ5937B	Zener diode	33V±5%, Izt=11.4mA, Zzt=33.0Ω, 3W	DO-214AC	1d	1w	Mco
H37B	-	3SMBJ5937B	Zener diode	33V±5%, Izt=11.4mA, Zzt=33.0Ω, 3W	DO-214AA	1d	1w	Mco
H38B	-	3SMAJ5938B	Zener diode	36V±5%, Izt=10.4mA, Zzt=38.0Ω, 3W	DO-214AC	1d	1w	Mco
H38B	-	3SMBJ5938B	Zener diode	36V±5%, Izt=10.4mA, Zzt=38.0Ω, 3W	DO-214AA	1d	1w	Mco
H39B	-	3SMAJ5939B	Zener diode	39V±5%, Izt=9.6mA, Zzt=45.0Ω, 3W	DO-214AC	1d	1w	Mco
H39B	-	3SMBJ5939B	Zener diode	39V±5%, Izt=9.6mA, Zzt=45.0Ω, 3W	DO-214AA	1d	1w	Mco
H4	-	BZD27C240P	Zener diode	228..256V, Zzt=400Ω, Izt=2mA, 1W	SOD-123FL	7d	2u	Tsc
H4	-	BZX585-C8V2	Zener diode	8.2V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
H4	-	CMOZ8V2	Zener diode	7.79..8.61V, Izt=5mA, Zzt=15Ω, 250mW	SOD-523	6d	1a	Cen
H4	-	CURMT104-HF	Si-diode	U-fast Rec. Rect., 400V, 1A, Vf<1.3V(1A), 50ns	SOD-123H	10d	1a	Cmc
H4	-	CZRH5244B-G	Zener diode	13.3..14.7V, Zzt=15Ω, Izt=9.0mA, 150mW	SOD-523	6d	1a	Cmc
H4	-	CZRV5244B-G	Zener diode	13.3..14.7V, Zzt=15Ω, Izt=9.0mA, 200mW	SOD-323	5d	1a	Cmc
H4	-	CZRW5244B-G	Zener diode	13.30..14.70V, Zzt=15Ω, Izt=9.0mA, 500mW	SOD-123	5d	1a	Cmc
H4	-	LMSZ5244BT1G	Zener diode	13.3..14.7V, Izt=9mA, 500mW	SOD-123	5d	1d	Lrc
H4	-	MM1Z5229B	Zener diode	4.09..4.52V, Izt=20mA, Zzt=22Ω, 500mW	SOD-323FL	7d	1a	Eic
H4	-	MM1Z5229BH	Zener diode	4.09..4.52V, Izt=20mA, Zzt=22Ω, 500mW	SOD-123	5d	1a	Zow
H4	-	MM3Z5244B	Zener diode	13.30..14.70V, Izt=9.0mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Ext
H4	-	MMBZ5244BV	Zener diode	14V±5%, Izt=9.0mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Pjt
H4	-	MMSZ5229B	Zener diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 500mW	SOD-123	5d	1a	Eic
H4	-	MMSZ5244B-F	Zener diode	13.30..14.70V, Izt=9.0mA, 500mW	SOD-123F	7d	1a	Ttr
H4	-	MMSZ5244BWS	Zener diode	13.30..14.70V, Izt=9.0mA, 200mW	SOD-323F	7d	1a	Ttr
H4	-	PZU3.6B2	Zener diode	3.55..3.8V, Zzt=90Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
H40B	-	3SMAJ5940B	Zener diode	43V±5%, Izt=8.7mA, Zzt=53.0Ω, 3W	DO-214AC	1d	1w	Mco
H40B	-	3SMBJ5940B	Zener diode	43V±5%, Izt=8.7mA, Zzt=53.0Ω, 3W	DO-214AA	1d	1w	Mco
H41B	-	3SMAJ5941B	Zener diode	47V±5%, Izt=8.0mA, Zzt=67.0Ω, 3W	DO-214AC	1d	1w	Mco
H41B	-	3SMBJ5941B	Zener diode	47V±5%, Izt=8.0mA, Zzt=67.0Ω, 3W	DO-214AA	1d	1w	Mco
H42B	-	3SMAJ5942B	Zener diode	51V±5%, Izt=7.3mA, Zzt=70.0Ω, 3W	DO-214AC	1d	1w	Mco
H42B	-	3SMBJ5942B	Zener diode	51V±5%, Izt=7.3mA, Zzt=70.0Ω, 3W	DO-214AA	1d	1w	Mco
H43B	-	3SMAJ5943B	Zener diode	56V±5%, Izt=6.7mA, Zzt=86.0Ω, 3W	DO-214AC	1d	1w	Mco
H43B	-	3SMBJ5943B	Zener diode	56V±5%, Izt=6.7mA, Zzt=86.0Ω, 3W	DO-214AA	1d	1w	Mco
H5	-	BZD27C270P	Zener diode	251..289V, Zzt=450Ω, Izt=2mA, 1W	SOD-123FL	7d	2u	Tsc
H5	-	BZX584B12V	Zener diode	11.76..12.24V, Izt=5mA, Zzt=25Ω, 200mW	SOD-523FL	7d	1a	Tac
H5	-	BZX585-C9V1	Zener diode	9.1V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
H5	-	CMOZ9V1	Zener diode	8.65..9.56V, Izt=5mA, Zzt=15Ω, 250mW	SOD-523	6d	1a	Cen
H5	-	CURMT105-HF	Si-diode	U-fast Rec. Rect., 600V, 1A, Vf<1.7V(1A), 70ns	SOD-123H	10d	1a	Cmc
H5	-	CZRH5245B-G	Zener diode	14.25..15.75V, Zzt=16Ω, Izt=8.5mA, 150mW	SOD-523	6d	1a	Cmc
H5	-	CZRV5245B-G	Zener diode	14.25..15.75V, Zzt=16Ω, Izt=8.5mA, 200mW	SOD-323	5d	1a	Cmc
H5	-	CZRW5245B-G	Zener diode	14.25..15.75V, Zzt=16Ω, Izt=8.5mA, 500mW	SOD-123	5d	1a	Cmc
H5	-	LMSZ5245BT1G	Zener diode	14.25..15.75V, Izt=8.5mA, 500mW	SOD-123	5d	1d	Lrc
H5	-	MM1Z5250B	Zener diode	19.0..21.0V, Izt=6.2mA, Zzt=25Ω, 500mW	SOD-323FL	7d	1a	Eic
H5	-	MM1Z5250BH	Zener diode	19..21V, Izt=6.2mA, Zzt=25Ω, 500mW	SOD-123	5d	1a	Zow
H5	-	MM3Z5245B	Zener diode	14.25..15.75V, Izt=8.5mA, Zzt=16Ω, 200mW	SOD-323	5d	1a	Ext
H5	-	MM5Z12VB	Zener diode	11.76..12.24V, Izt=5mA, Zzt=25Ω, 200mW	SOD-523FL	7d	1a	Tac
H5	-	MMBZ5245BV	Zener diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 200mW	SOD-523	6d	1a	Pjt
H5	-	MMSZ5245B	Zener diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 500mW	SOD-123	5d	1d	Di
H5	-	MMSZ5245B-F	Zener diode	14.25..15.75V, Izt=8.5mA, 500mW	SOD-123F	7d	1a	Ttr
H5	-	MMSZ5245BS	Zener diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 500mW	SOD-323	5d	1d	Di
H5	-	MMSZ5245BWS	Zener diode	14.25..15.75V, Izt=8.5mA, 200mW	SOD-323F	7d	1a	Ttr
H5	-	MMSZ5250B	Zener diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 500mW	SOD-123	5d	1a	Eic
H5	-	OYD15VT1	Zener diode	13.8...15.6V, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1a	Ouy
H5	-	PZU3.9B2	Zener diode	3.87..4.1V, Zzt=90Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
H5	-	TVSS5VESPT	TVS	Vbr=6.2V, Vrwm=5V, 9.4A, 240W(1ms)	SC-79	7d	1a	Chm
H5	ag	MMSZ5245B	Zener diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 500mW	SOD-123	5d	1d	Di
H6	-	BZX585-C10	Zener diode	10V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
H6	-	CMOZ10V	Zener diode	9.50..10.50V, Izt=5mA, Zzt=20Ω, 250mW	SOD-523	6d	1a	Cen
H6	-	CURMT106-HF	Si-diode	U-fast Rec. Rect., 800V, 1A, Vf<1.7V(1A), 70ns	SOD-123H	10d	1a	Cmc
H6	-	MMSZ5241B-V-G	Zener diode	11V±5%, Izt=20mA, Zzt=22Ω, 500mW	SOD-123	5d	1kb	Vs
H6	-	PZU4.3B2	Zener diode	4.15..4.34V, Zzt=90Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
H7	-	BZX585-C11	Zener diode	11V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
H7	-	CMOZ11V	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 250mW	SOD-523	6d	1a	Cen
H7	-	CURMT107-HF	Si-diode	U-fast Rec. Rect., 1000V, 1A, Vf<1.7V(1A), 70ns	SOD-123H	10d	1a	Cmc
H7	-	MMSZ5242B-V-G	Zener diode	12V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123	5d	1kb	Vs
H7	-	PZU4.7B2	Zener diode	4.55..4.75V, Zzt=80Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
H8	-	BZT52C5V1WT	Zener diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 200mW	SOD-523	6d	1a	Ttr
H8	-	BZX585-C12	Zener diode	12V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
H8	-	CMOZ12V	Zener diode	11.40..12.60V, Izt=5mA, Zzt=25Ω, 250mW	SOD-523	6d	1a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
H8	-	DDZ9704	Zener diode	17V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
H8	-	MM5Z5V1	Zener diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 200mW	SOD-523	6d	1a	Eic
H8	-	MM5Z5V1H	Zener diode	4.8..5.4V, Izt=5mA, Zzt=60Ω, 200mW	SOD-523	6d	1a	Zow
H8	-	MMSZ5243B-V-G	Zener diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 500mW	SOD-123	5d	1kb	Vs
H8	-	PZU5.1B2	Zener diode	4.98..5.2V, Zzt=60Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
H9	-	BZT52C62WT	Zener diode	58..66V, Izt=1mA, 200mW	SOD-523	6d	1a	Ttr
H9	-	BZX585-C13	Zener diode	13V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
H9	-	CMOZ13V	Zener diode	12.35..13.65V, Izt=5mA, Zzt=30Ω, 250mW	SOD-523	6d	1a	Cen
H9	-	DDZ9681	Zener diode	2.4V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
H9	-	MM5Z62H	Zener diode	58..66V, Izt=1mA, Zzt=215Ω, 200mW	SOD-523	6d	1a	Zow
H9	-	MM5Z62V	Zener diode	62V±5%, Izt=2mA, Zzt=215Ω, 200mW	SOD-523	6d	1a	Eic
H9	-	MMSZ5244B-V-G	Zener diode	14V±5%, Izt=9mA, Zzt=15Ω, 500mW	SOD-123	5d	1kb	Vs
H9	-	PZU5.6B2	Zener diode	5.49..5.73V, Zzt=40Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HA	-	BZT52B4V3WT	Zener diode	4.214..4.386V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
HA	-	BZX585-C16	Zener diode	16V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HA	-	DDZ9682	Zener diode	2.7V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HA	-	ES1J	Si-diode	U-fast Recovery, 600V, 1A, Vf<1.7V(1A), <35ns	DO-214AC	1d	2j	Fag
HA	-	MM5Z4B3H	Zener diode	4.214..4.386V, Zzt=130Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
HA	-	PZU6.2B2	Zener diode	6.06..6.33V, Zzt=30Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HA	-	RL52Z4V3	Zener diode	4.214..4.386V, Zzt=130Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
HB	-	BZT52B4V7WT	Zener diode	4.606..4.794V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
HB	-	BZX585-C18	Zener diode	18V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HB	-	DDZ9683	Zener diode	3.0V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HB	-	KDZ3.9B	Zener diode	3.9V±2.5%, 40mA, 1W	PMDU	7d	1s	Rhm
HB	-	MM5Z4B7H	Zener diode	4.606..4.794V, Zzt=130Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
HB	-	MUH1PB	Si-diode	Rectifier, 100V, 1A, Vf<0.9V(1A)	MicroSMP	8d	1k	Vs
HB	-	PZU6.8B2	Zener diode	6.65..6.93V, Zzt=20Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HB	-	RL52Z4V7	Zener diode	4.606..4.794V, Zzt=130Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
HB	-	SMF19A	TVS	Vrwm=19.0V, Vbr=21.10..23.30V, 6.54A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
HB	-	TV02W190-G	TVS	Vrwm=19V, Vbr=21.1..23.3V, Ipp=6.54A, 200W(1ms)	SOD-123	5d	2o	Cmc
HB	-	UH1B	Si-diode	Rectifier, 100V, 1A, Vf<0.96V(1A)	DO-214AC	1d	1k	Vs
HB	-	UH1PB	Si-diode	Rectifier, 100V, 1A, Vf<0.95V(1A)	DO-220AA	8d	1k	Vs
HB	-	UH2B	Si-diode	Rectifier, 100V, 2A, Vf<0.9V(2A)	DO-214AA	1d	1k	Vs
HB	-	UH3B	Si-diode	Rectifier, 100V, 3A, Vf<0.9V(2A)	DO-214AB	1d	1k	Vs
HB11	-	HBM11PT	Si-diode	Rectifer, U-fast, 50V, 1A	DO-214AA	1d	1a	Chm
HB12	-	HBM12PT	Si-diode	Rectifer, U-fast, 100V, 1A	DO-214AA	1d	1a	Chm
HB13	-	HBM13PT	Si-diode	Rectifer, U-fast, 200V, 1A	DO-214AA	1d	1a	Chm
HB14	-	HBM14PT	Si-diode	Rectifer, U-fast, 300V, 1A	DO-214AA	1d	1a	Chm
HB15	-	HBM15PT	Si-diode	Rectifer, U-fast, 400V, 1A	DO-214AA	1d	1a	Chm
HB16	-	HBM16PT	Si-diode	Rectifer, U-fast, 600V, 1A	DO-214AA	1d	1a	Chm
HB17	-	HBM17PT	Si-diode	Rectifer, U-fast, 800V, 1A	DO-214AA	1d	1a	Chm
HB18	-	HBM18PT	Si-diode	Rectifer, U-fast, 1000V, 1A	DO-214AA	1d	1a	Chm
HB21	-	HBM21PT	Si-diode	Rectifer, U-fast, 50V, 2A	DO-214AA	1d	1a	Chm
HB22	-	HBM22PT	Si-diode	Rectifer, U-fast, 100V, 2A	DO-214AA	1d	1a	Chm
HB23	-	HBM23PT	Si-diode	Rectifer, U-fast, 200V, 2A	DO-214AA	1d	1a	Chm
HB24	-	HBM24PT	Si-diode	Rectifer, U-fast, 300V, 2A	DO-214AA	1d	1a	Chm
HB25	-	HBM25PT	Si-diode	Rectifer, U-fast, 400V, 2A	DO-214AA	1d	1a	Chm
HB26	-	HBM26PT	Si-diode	Rectifer, U-fast, 600V, 2A	DO-214AA	1d	1a	Chm
HB27	-	HBM27PT	Si-diode	Rectifer, U-fast, 800V, 2A	DO-214AA	1d	1a	Chm
HB28	-	HBM28PT	Si-diode	Rectifer, U-fast, 1000V, 2A	DO-214AA	1d	1a	Chm
HB31	-	HBM31PT	Si-diode	Rectifer, U-fast, 50V, 3A	DO-214AA	1d	1a	Chm
HB32	-	HBM32PT	Si-diode	Rectifer, U-fast, 100V, 3A	DO-214AA	1d	1a	Chm
HB33	-	HBM33PT	Si-diode	Rectifer, U-fast, 200V, 3A	DO-214AA	1d	1a	Chm
HB34	-	HBM34PT	Si-diode	Rectifer, U-fast, 300V, 3A	DO-214AA	1d	1a	Chm
HB35	-	HBM35PT	Si-diode	Rectifer, U-fast, 400V, 3A	DO-214AA	1d	1a	Chm
HB36	-	HBM36PT	Si-diode	Rectifer, U-fast, 600V, 3A	DO-214AA	1d	1a	Chm
HB37	-	HBM37PT	Si-diode	Rectifer, U-fast, 800V, 3A	DO-214AA	1d	1a	Chm
HB38	-	HBM38PT	Si-diode	Rectifer, U-fast, 1000V, 3A	DO-214AA	1d	1a	Chm
HC	-	3T064C	Thy-SPD	Vdrm=58V, Vs=77V, Ipp=100A, 120pF	DO-214AA	1d	1a	Mde
HC	-	BZT52B5V1WT	Zener diode	4.998..5.202V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
HC	-	BZX585-C20	Zener diode	20V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HC	-	DDZ9684	Zener diode	3.3V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HC	-	GBLC24CI	TVS	Vrwm=24V, 1A, 350W(1ms), Bidir.	SOD-323	5ba	1e	Prt
HC	-	MM5Z5B1H	Zener diode	4.998..5.202V, Zzt=130Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
HC	-	MUH1PC	Si-diode	Rectifier, 150V, 1A, Vf<0.9V(1A)	MicroSMP	8d	1k	Vs
HC	-	P0640SC	Thy-SPD	Vdrm=58V, Vs=77V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
HC	-	PZU7.5B2	Zener diode	7.28..7.6V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HC	-	RL52Z5V1	Zener diode	4.998..5.202V, Zzt=130Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
HC	-	UH1C	Si-diode	Rectifier, 150V, 1A, Vf<0.96V(1A)	DO-214AC	1d	1k	Vs
HC	-	UH1PC	Si-diode	Rectifier, 150V, 1A, Vf<0.95V(1A)	DO-220AA	8d	1k	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
HC	-	UH3C	Si-diode	Rectifier, 150V, 2A, Vf<0.9V(2A)	DO-214AA	1d	1k	Vs
HC31	-	HCM31PT	Si-diode	Rectifer, U-fast, 50V, 3A	DO-214AB	1d	1a	Chm
HC32	-	HCM32PT	Si-diode	Rectifer, U-fast, 100V, 3A	DO-214AB	1d	1a	Chm
HC33	-	HCM33PT	Si-diode	Rectifer, U-fast, 200V, 3A	DO-214AB	1d	1a	Chm
HC34	-	HCM34PT	Si-diode	Rectifer, U-fast, 300V, 3A	DO-214AB	1d	1a	Chm
HC35	-	HCM35PT	Si-diode	Rectifer, U-fast, 400V, 3A	DO-214AB	1d	1a	Chm
HC36	-	HCM36PT	Si-diode	Rectifer, U-fast, 600V, 3A	DO-214AB	1d	1a	Chm
HC37	-	HCM37PT	Si-diode	Rectifer, U-fast, 800V, 3A	DO-214AB	1d	1a	Chm
HC38	-	HCM38PT	Si-diode	Rectifer, U-fast, 1000V, 3A	DO-214AB	1d	1a	Chm
HCL	-	3T064CLC	Thy-SPD	Vdrm=58V, Vs=77V, Ipp=2.2A(1ms), 90pF	DO-214AA	1d	1a	Lfr
HD	-	3T072C	Thy-SPD	Vdrm=65V, Vs=88V, Ipp=100A, 120pF	DO-214AA	1d	1a	Mde
HD	-	BZT52B5V6WT	Zener diode	5.488..5.712V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
HD	-	BZX585-C22	Zener diode	22V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HD	-	DDZ9685	Zener diode	3.6V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HD	-	MM5Z5B6H	Zener diode	5.488..5.712V, Zzt=80Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
HD	-	MUH1PD	Si-diode	Rectifier, 200V, 1A, Vf<0.9V(1A)	MicroSMP	8d	1k	Vs
HD	-	P0720SC	Thy-SPD	Vdrm=65V, Vs=88V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
HD	-	P4SMAJ5.0	TVS	Vrwm=5V, 41.6A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HD	-	PZU8.2B2	Zener diode	8.02..8.36V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HD	-	RL52Z5V6	Zener diode	5.488..5.712V, Zzt=80Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
HD	-	SMAJ530	TVS	Vrwm=530V, Vbr=520..540V, 0.5A, 300W(1ms)	DO-214AC	1d	1k	Vs
HD	-	UH1D	Si-diode	Rectifier, 200V, 1A, Vf<0.96V(1A)	DO-214AC	1d	1k	Vs
HD	-	UH1PD	Si-diode	Rectifier, 200V, 1A, Vf<0.95V(1A)	DO-220AA	8d	1k	Vs
HD	-	UH3D	Si-diode	Rectifier, 200V, 2A, Vf<0.9V(2A)	DO-214AA	1d	1k	Vs
HD	-	Z2SMB47	Zener diode	47V±5%, Izt=10mA, 2W	DO-214AA	1d	2j	Fag
HDD	-	3.0SMCJ5.0	TVS	Vbr=6.4..7.55V, Vrwm=5.0V, 312.5A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDD	-	SMDJ5.0	TVS	Vrwm=5.0V, Vbr=6.40..7.55V, Ipp=312.5A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDD	-	TV30C5V0K-G	TVS	Vrwm=5.0V, Vbr=6.40..7.30V, Ipp=312.50A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDE	-	3.0SMCJ5.0A	TVS	Vbr=6.4..7.25V, Vrwm=5.0V, 9.2 326A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDE	-	SMDJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, Ipp=326.1A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDE	-	TV30C5V0J-G	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=326.09A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDF	-	3.0SMCJ6.0	TVS	Vbr=6.67..8.45V, Vrwm=6.0V, 263.2A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDF	-	SMDJ6.0	TVS	Vrwm=6.0V, Vbr=6.67..8.45V, Ipp=263.2A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDF	-	TV30C6V0K-G	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, Ipp=263.16A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDG	-	3.0SMCJ6.0A	TVS	Vbr=6.67..7.67V, Vrwm=6.0V, 291.3A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDG	-	SMDJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, Ipp=291.3A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDG	-	TV30C6V0J-G	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=291.26A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDH	-	3.0SMCJ6.5	TVS	Vbr=7.22..9.14V, Vrwm=6.5V, 243.9A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDH	-	SMDJ6.5	TVS	Vrwm=6.5V, Vbr=7.22..9.14V, Ipp=243.9A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDH	-	TV30C6V5K-G	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, Ipp=243.90A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDK	-	3.0SMCJ6.5A	TVS	Vbr=7.22..8.30V, Vrwm=6.5V, 267.9A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDK	-	SMDJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, Ipp=267.9A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDK	-	TV30C6V5J-G	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=267.86A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDL	-	3.0SMCJ7.0	TVS	Vbr=7.78..9.86V, Vrwm=7.0V, 225.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDL	-	3T072CLC	Thy-SPD	Vdrm=65V, Vs=88V, Ipp=2.2A(1ms), 90pF	DO-214AA	1d	1a	Lfr
HDL	-	SMDJ7.0	TVS	Vrwm=7.0V, Vbr=7.78..9.86V, Ipp=225.6A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDL	-	SMLJ7.0	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=225.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HDL	-	TV30C7V0K-G	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=225.56A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDM	-	3.0SMCJ7.0A	TVS	Vbr=7.78..8.95V, Vrwm=7.0V, 250A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDM	-	SMDJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, Ipp=250.0A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDM	-	SMLJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=250.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HDM	-	TV30C7V0J-G	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=250.0A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDN	-	3.0SMCJ7.5	TVS	Vbr=8.33..10.67V, Vrwm=7.5V, 209.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDN	-	SMDJ7.5	TVS	Vrwm=7.5V, Vbr=8.33..10.67V, Ipp=209.8A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDN	-	SMLJ7.5	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, Ipp=209.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HDN	-	TV30C7V5K-G	TVS	Vrwm=7.5V, Vbr=8.33..10.20V, Ipp=209.79A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDP	-	3.0SMCJ7.5A	TVS	Vbr=8.33..9.58V, Vrwm=7.5V, 232.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDP	-	CD214L-T7.5ALF	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, Irsm=232.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HDP	-	SMDJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, Ipp=232.6A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDP	-	SMLJ7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, Irsm=232.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HDP	-	TV30C7V5J-G	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=232.56A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDQ	-	3.0SMCJ8.0	TVS	Vbr=8.89..11.30V, Vrwm=8.0V, 200A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDQ	-	SMDJ8.0	TVS	Vrwm=8.0V, Vbr=8.89..11.3V, Ipp=200.0A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDQ	-	SMLJ8.0	TVS	Vrwm=8.0V, Vbr=8.89..10.9V, Ipp=200.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HDQ	-	TV30C8V0K-G	TVS	Vrwm=8.0V, Vbr=8.89..10.90V, Ipp=200.0A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDR	-	3.0SMCJ8.0A	TVS	Vbr=8.89..10.23V, Vrwm=8.0V, 220.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDR	-	CD214L-T8.0ALF	TVS	Vbr=8.89..9.83V, Vrwm=8V, Irsm=220.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HDR	-	SMDJ8.0A	TVS	Vrwm=8.0V, Vbr=8.89 ..10.23V, Ipp=220.6A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDR	-	SMLJ8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8V, Irsm=220.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HDR	-	TV30C8V0J-G	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=220.59A, 3000W(1ms)	DO-214AB	1d	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
HDS	-	3.0SMCJ8.5	TVS	Vbr=9.44..11.92V, Vrwm=8.5V, 188.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDS	-	SMDJ8.5	TVS	Vrwm=8.5V, Vbr=9.44..11.92V, Ipp=188.7A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDS	-	SMLJ8.5	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, Ipp=188.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HDS	-	TV30C8V5K-G	TVS	Vrwm=8.5V, Vbr=9.44..11.50V, Ipp=188.68A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDT	-	3.0SMCJ8.5A	TVS	Vbr=9.44..10.82V, Vrwm=8.5V, 208.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDT	-	CD214L-T8.5ALF	TVS	Vbr=9.44..10.43V, Vrwm=8.5V, Irsm=208.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HDT	-	SMDJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, Ipp=208.3A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDT	-	SMLJ8.5A	TVS	Vbr=9.44..10.43V, Vrwm=8.5V, Irsm=208.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HDT	-	TV30C8V5J-G	TVS	Vrwm=8.5V, Vbr=9.44..10.40V, Ipp=208.33A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDU	-	3.0SMCJ9.0	TVS	Vbr=10.0..12.6V, Vrwm=9.0V, 177.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDU	-	SMDJ9.0	TVS	Vrwm=9.0V, Vbr=10.0..12.6V, Ipp=177.5A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDU	-	SMLJ9.0	TVS	Vrwm=9.0V, Vbr=10.0..12.2V, Ipp=177.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HDU	-	TV30C9V0K-G	TVS	Vrwm=9.0V, Vbr=10.0..12.20V, Ipp=177.51A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDV	-	3.0SMCJ9.0A	TVS	Vbr=10.0..11.5V, Vrwm=9.0V, 194.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDV	-	CD214L-T9.0ALF	TVS	Vbr=10.0..11.05V, Vrwm=9V, Irsm=194.8A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HDV	-	SMDJ9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, Ipp=194.8A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDV	-	SMLJ9.0A	TVS	Vbr=10.0..11.05V, Vrwm=9V, Irsm=194.8A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HDV	-	TV30C9V0J-G	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=194.81A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDW	-	3.0SMCJ10	TVS	Vbr=11.1..14.1V, Vrwm=10V, 159.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDW	-	SMDJ10	TVS	Vrwm=10V, Vbr=11.1..14.1V, Ipp=159.6A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDW	-	SMLJ10	TVS	Vrwm=10V, Vbr=11.1..13.6V, Ipp=159.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HDW	-	TV30C100K-G	TVS	Vrwm=10.0V, Vbr=11.10..13.60V, Ipp=159.57A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDX	-	3.0SMCJ10A	TVS	Vbr=11.1..12.8V, Vrwm=10V, 176.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDX	-	CD214L-T10ALF	TVS	Vbr=11.10..12.27V, Vrwm=10V, Irsm=176.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HDX	-	SMDJ10A	TVS	Vrwm=10V, Vbr=11.1..12.8V, Ipp=176.5A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDX	-	SMLJ10A	TVS	Vbr=11.10..12.27V, Vrwm=10V, Irsm=176.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HDX	-	TV30C100J-G	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=176.47A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDY	-	3.0SMCJ11	TVS	Vbr=12.2..15.4V, Vrwm=11V, 149.2A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDY	-	SMDJ11	TVS	Vrwm=11V, Vbr=12.2..15.4V, Ipp=149.3A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDY	-	SMLJ11	TVS	Vrwm=11V, Vbr=12.2..14.9V, Ipp=149.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HDY	-	TV30C110K-G	TVS	Vrwm=11.0V, Vbr=12.20..14.90V, Ipp=149.25A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HDZ	-	3.0SMCJ11A	TVS	Vbr=12.2..14.0V, Vrwm=11V, 184.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HDZ	-	CD214L-T11ALF	TVS	Vbr=12.20..13.50V, Vrwm=11V, Irsm=164.8A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HDZ	-	SMDJ11A	TVS	Vrwm=11V, Vbr=12.2..14.0V, Ipp=164.8A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HDZ	-	SMLJ11A	TVS	Vbr=12.20..13.50V, Vrwm=11V, Irsm=164.8A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HDZ	-	TV30C110J-G	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=164.84A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HE	-	3T080C	Thy-SPD	Vdrm=75V, Vs=98V, Ipp=100A, 100pF	DO-214AA	1d	1a	Mde
HE	-	BZT52B6V2WT	Zener diode	6.076..6.324V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
HE	-	BZX585-C24	Zener diode	24V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HE	-	CD214A-T5.0A	TVS	Vrwm=5.0V, Irsm=43.5A, 400W(1ms)	DO-214AC	1d	1a	Brn
HE	-	DDZ9686	Zener diode	3.9V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HE	-	MM5Z6B2H	Zener diode	6.076..6.324V, Zzt=50Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
HE	-	P0800SC	Thy-SPD	Vdrm=75V, Vs=98V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
HE	-	P4SMAJ5.0A	TVS	Vrwm=5V, 43.5A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HE	-	PZU9.1B2	Zener diode	8.85..9.23V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HE	-	RL52Z6V2	Zener diode	6.076..6.324V, Zzt=50Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
HE	-	SMAJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 43.5A, 400W(1ms)	DO-214AC	1d	1m	Di
HE	-	SMF12A	TVS	Vrwm=12V, Vbr=13.30..14.70V, 10.1A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
HE	-	SMF5.0A	TVS	Vrwm=5V, Vbr=6.4..7V, Ipp=21.7A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
HE	-	TV04A301JB-G	TVS	Vrwm=300.0V, Vbr=335.0..371.0V, Ipp=0.82A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
HEA	-	TV30C190K-G	TVS	Vrwm=19.0V, Vbr=21.13..25.76V, Ipp=88.21A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HEB	-	TV30C190J-G	TVS	Vrwm=19.0V, Vbr=21.10..23.30V, Ipp=97.47A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HED	-	3.0SMCJ12	TVS	Vbr=13.3..16.9V, Vrwm=12V, 136.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HED	-	SMDJ12	TVS	Vrwm=12V, Vbr=13.3..16.9V, Ipp=136.4A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HED	-	SMLJ12	TVS	Vrwm=12V, Vbr=13.3..16.3V, Ipp=136.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HED	-	TV30C120K-G	TVS	Vrwm=12V, Vbr=13.30..16.30V, Ipp=136.36A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HEE	-	3.0SMCJ12A	TVS	Vbr=13.3..15.3V, Vrwm=12V, 150.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HEE	-	CD214L-T12ALF	TVS	Vbr=13.30..14.70V, Vrwm=12V, Irsm=150.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HEE	-	SMDJ12A	TVS	Vrwm=12V, Vbr=13.3..15.3V, Ipp=150.8A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HEE	-	SMLJ12A	TVS	Vbr=13.30..14.70V, Vrwm=12V, Irsm=150.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HEE	-	TV30C120J-G	TVS	Vrwm=12V, Vbr=13.30..14.70V, Ipp=150.75A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HEF	-	3.0SMCJ13	TVS	Vbr=14.4..18.2V, Vrwm=13V, 126.0A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HEF	-	SMDJ13	TVS	Vrwm=13V, Vbr=14.4..18.2V, Ipp=126.1A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HEF	-	SMLJ13	TVS	Vrwm=13V, Vbr=14.4..17.6V, Ipp=126.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HEF	-	TV30C130K-G	TVS	Vrwm=13.0V, Vbr=14.40..17.60V, Ipp=126.05A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HEG	-	3.0SMCJ13A	TVS	Vbr=14.4..16.5V, Vrwm=13V, 139.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HEG	-	CD214L-T13ALF	TVS	Vbr=14.40..15.90V, Vrwm=13V, Irsm=139.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HEG	-	SMDJ13A	TVS	Vrwm=13V, Vbr=14.4..16.5V, Ipp=139.5A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HEG	-	SMLJ13A	TVS	Vbr=14.40..15.90V, Vrwm=13V, Irsm=139.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HEG	-	TV30C130J-G	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=139.53A, 3000W(1ms)	DO-214AB	1d	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
HEH	-	3.0SMCJ14	TVS	Vbr=15.6..19.8V, Vrwm=14V, 116.2A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HEH	-	SMDJ14	TVS	Vrwm=14V, Vbr=15.6..19.8V, Ipp=116.3A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HEH	-	SMLJ14	TVS	Vrwm=14V, Vbr=15.6..19.1V, Ipp=116.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HEH	-	TV30C140K-G	TVS	Vrwm=14.0V, Vbr=15.60..19.10V, Ipp=116.28A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HEK	-	3.0SMCJ14A	TVS	Vbr=15.6..17.9V, Vrwm=14V, 129.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HEK	-	CD214L-T14ALF	TVS	Vbr=15.60..17.20V, Vrwm=14V, Irsm=129.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HEK	-	SMDJ14A	TVS	Vrwm=14V, Vbr=15.6..17.9V, Ipp=129.3A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HEK	-	SMLJ14A	TVS	Vbr=15.60..17.20V, Vrwm=14V, Irsm=129.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HEK	-	TV30C140J-G	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=129.31A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HEL	-	3.0SMCJ15	TVS	Vbr=16.7..21.1V, Vrwm=15V, 111.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HEL	-	3T080CLC	Thy-SPD	Vdrm=75V, Vs=98V, Ipp=2.2A(1ms), 90pF	DO-214AA	1d	1a	Lfr
HEL	-	SMDJ15	TVS	Vrwm=15V, Vbr=16.7..21.1V, Ipp=111.5A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HEL	-	SMLJ15	TVS	Vrwm=15V, Vbr=16.7..20.4V, Ipp=111.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HEL	-	TV30C150K-G	TVS	Vrwm=15.0V, Vbr=16.70..20.40V, Ipp=111.52A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HEM	-	3.0SMCJ15A	TVS	Vbr=16.7..19.2V, Vrwm=15V, 123.0A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HEM	-	CD214L-T15ALF	TVS	Vbr=16.70..18.50V, Vrwm=15V, Irsm=123.0A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HEM	-	SMDJ15A	TVS	Vrwm=15V, Vbr=16.7..19.2V, Ipp=123.0A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HEM	-	SMLJ15A	TVS	Vbr=16.70..18.50V, Vrwm=15V, Irsm=123.0A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HEM	-	TV30C150J-G	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=122.95A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HEN	-	3.0SMCJ16	TVS	Vbr=17.8..22.6V, Vrwm=16V, 104.2A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HEN	-	SMDJ16	TVS	Vrwm=16V, Vbr=17.8..22.6V, Ipp=104.2A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HEN	-	SMLJ16	TVS	Vrwm=16V, Vbr=17.8..21.8V, Ipp=104.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HEN	-	TV30C160K-G	TVS	Vrwm=16.0V, Vbr=17.80..21.80V, Ipp=104.17A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HEP	-	3.0SMCJ16A	TVS	Vbr=17.8..20.5V, Vrwm=16V, 115.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HEP	-	CD214L-T16ALF	TVS	Vbr=17.80..19.70V, Vrwm=16V, Irsm=115.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HEP	-	SMDJ16A	TVS	Vrwm=16V, Vbr=17.8..20.5V, Ipp=115.4A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HEP	-	SMLJ16A	TVS	Vbr=17.80..19.70V, Vrwm=16V, Irsm=115.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HEP	-	TV30C160J-G	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=115.38A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HEQ	-	3.0SMCJ17	TVS	Vbr=18.9..23.9V, Vrwm=17V, 98.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HEQ	-	SMDJ17	TVS	Vrwm=17V, Vbr=18.9..23.9V, Ipp=98.4A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HEQ	-	SMLJ17	TVS	Vrwm=17V, Vbr=18.9..23.1V, Ipp=98.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HEQ	-	TV30C170K-G	TVS	Vrwm=17.0V, Vbr=18.90..23.10V, Ipp=98.36A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HER	-	3.0SMCJ17A	TVS	Vbr=18.9..21.7V, Vrwm=17V, 106.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HER	-	CD214L-T17ALF	TVS	Vbr=18.90..20.90V, Vrwm=17V, Irsm=106.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HER	-	SMDJ17A	TVS	Vrwm=17V, Vbr=18.9..21.7V, Ipp=108.7A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HER	-	SMLJ17A	TVS	Vbr=18.90..20.90V, Vrwm=17V, Irsm=106.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HER	-	TV30C170J-G	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=108.70A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HES	-	3.0SMCJ18	TVS	Vbr=20.0..25.3V, Vrwm=18V, 93.2A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HES	-	SMDJ18	TVS	Vrwm=18V, Vbr=20.0..25.3V, Ipp=93.2A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HES	-	SMLJ18	TVS	Vrwm=18V, Vbr=20.0..24.4V, Ipp=93.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HES	-	TV30C180K-G	TVS	Vrwm=18.0V, Vbr=20.0..24.40V, Ipp=93.17A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HET	-	3.0SMCJ18A	TVS	Vbr=20.0..23.3V, Vrwm=18V, 102.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HET	-	CD214L-T18ALF	TVS	Vbr=20.0..22.10V, Vrwm=18V, Irsm=102.8A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HET	-	SMDJ18A	TVS	Vrwm=18V, Vbr=20.0..23.3V, Ipp=102.7A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HET	-	SMLJ18A	TVS	Vbr=20.0..22.10V, Vrwm=18V, Irsm=102.8A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HET	-	TV30C180J-G	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=102.74A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HEU	-	3.0SMCJ20	TVS	Vbr=22.2..28.1V, Vrwm=20V, 83.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HEU	-	SMDJ20	TVS	Vrwm=20V, Vbr=22.2..28.1V, Ipp=83.8A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HEU	-	SMLJ20	TVS	Vrwm=20V, Vbr=22.2..27.1V, Ipp=83.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HEU	-	TV30C200K-G	TVS	Vrwm=20.0V, Vbr=21.13..27.10V, Ipp=83.80A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HEV	-	3.0SMCJ20A	TVS	Vbr=22.2..25.5V, Vrwm=20V, 92.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HEV	-	CD214L-T20ALF	TVS	Vbr=22.20..24.50V, Vrwm=20V, Irsm=92.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HEV	-	SMDJ20A	TVS	Vrwm=20V, Vbr=22.2..25.5V, Ipp=92.6A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HEV	-	SMLJ20A	TVS	Vbr=22.20..24.50V, Vrwm=20V, Irsm=92.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HEV	-	TV30C200J-G	TVS	Vrwm=20.0V, Vbr=21.10..24.50V, Ipp=92.59A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HEW	-	3.0SMCJ22	TVS	Vbr=24.4..30.9V, Vrwm=22V, 76.2A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HEW	-	SMDJ22	TVS	Vrwm=22V, Vbr=24.4..30.9V, Ipp=76.1A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HEW	-	SMLJ22	TVS	Vrwm=22V, Vbr=24.4..29.8V, Ipp=76.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HEW	-	TV30C220K-G	TVS	Vrwm=22.0V, Vbr=24.40..29.80V, Ipp=76.14A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HEX	-	3.0SMCJ22A	TVS	Vbr=24.4..28.0V, Vrwm=22V, 84.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HEX	-	CD214L-T22ALF	TVS	Vbr=24.40..27.0V, Vrwm=22V, Irsm=84.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HEX	-	SMDJ22A	TVS	Vrwm=22V, Vbr=24.4..28.0V, Ipp=84.5A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HEX	-	SMLJ22A	TVS	Vbr=24.40..27.0V, Vrwm=22V, Irsm=84.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HEX	-	TV30C220J-G	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=84.51A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HEY	-	3.0SMCJ24	TVS	Vbr=26.7..33.8V, Vrwm=24V, 69.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HEY	-	SMDJ24	TVS	Vrwm=24V, Vbr=26.7..33.8V, Ipp=69.8A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HEY	-	SMLJ24	TVS	Vrwm=24V, Vbr=26.7..32.6V, Ipp=69.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HEY	-	TV30C240K-G	TVS	Vrwm=24.0V, Vbr=26.70..32.60V, Ipp=69.77A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HEZ	-	3.0SMCJ24A	TVS	Vbr=26.7..30.7V, Vrwm=24V, 77.2A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HEZ	-	CD214L-T24ALF	TVS	Vbr=26.70..29.50V, Vrwm=24V, Irsm=77.2A, 3000W(1ms)	DO-214AB	1d	1a	Brn

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
HEZ	-	SMDJ24A	TVS	Vrwm=24V, Vbr=26.7..30.7V, Ipp=77.1A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HEZ	-	SMLJ24A	TVS	Vbr=26.70..29.50V, Vrwm=24V, Irsm=77.2A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HEZ	-	TV30C240J-G	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=77.12A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HF	-	3T110C	Thy-SPD	Vdrm=90V, Vs=130V, Ipp=100A, 100pF	DO-214AA	1d	1a	Mde
HF	-	BZT52B6V8WT	Zener diode	6.664..6.936V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
HF	-	BZX585-C27	Zener diode	27V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HF	-	DDZ9687	Zener diode	4.3V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HF	-	KDZ12FV	Zener diode	11.40..12.60V, Izt=5mA, Zzt=15Ω, 100mW	TFSC	7d	1a	Kec
HF	-	MM5Z6B8H	Zener diode	6.664..6.936V, Zzt=30Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
HF	-	P1100SC	Thy-SPD	Vdrm=90V, Vs=130V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
HF	-	P4SMAJ6.0	TVS	Vrwm=6V, 35.1A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HF	-	PZU10B2	Zener diode	9.77..10.21V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HF	-	RL52Z6V8	Zener diode	6.664..6.936V, Zzt=30Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
HF	-	T110CB-LC	Thy-SPD	V Of-St=90V, Vs=130V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
HF	-	Z2SMB51	Zener diode	51V±5%, Izt=10mA, 2W	DO-214AA	1d	2j	Fag
HFD	-	3.0SMCJ26	TVS	Vbr=28.9..36.6V, Vrwm=26V, 64.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFD	-	SMDJ26	TVS	Vrwm=26V, Vbr=28.9..36.6V, Ipp=64.4A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFD	-	SMLJ26	TVS	Vrwm=26V, Vbr=28.9..35.3V, Ipp=64.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HFD	-	TV30C260K-G	TVS	Vrwm=26.0V, Vbr=28.90..35.30V, Ipp=64.38A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFE	-	3.0SMCJ26A	TVS	Vbr=28.9..33.2V, Vrwm=26V, 71.2A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFE	-	CD214L-T26ALF	TVS	Vbr=28.90..31.90V, Vrwm=26V, Irsm=71.2A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFE	-	SMDJ26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, Ipp=71.3A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFE	-	SMLJ26A	TVS	Vbr=28.90..31.90V, Vrwm=26V, Irsm=71.2A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFE	-	TV30C260J-G	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=71.26A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFF	-	3.0SMCJ28	TVS	Vbr=31.1..39.4V, Vrwm=28V, 60.0A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFF	-	SMDJ28	TVS	Vrwm=28V, Vbr=31.1..39.4V, Ipp=60.0A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFF	-	SMLJ28	TVS	Vrwm=28V, Vbr=31.1..38.0V, Ipp=60.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HFF	-	TV30C280K-G	TVS	Vrwm=28.0V, Vbr=31.10..38.0V, Ipp=60.0A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFG	-	3.0SMCJ28A	TVS	Vbr=31.1..35.8V, Vrwm=28V, 66.0A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFG	-	CD214L-T28ALF	TVS	Vbr=31.10..34.40V, Vrwm=28V, Irsm=66.0A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFG	-	SMDJ28A	TVS	Vrwm=28V, Vbr=31.1..35.8V, Ipp=66.1A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFG	-	SMLJ28A	TVS	Vbr=31.10..34.40V, Vrwm=28V, Irsm=66.0A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFG	-	TV30C280J-G	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=66.08A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFH	-	3.0SMCJ30	TVS	Vbr=33.3..42.2V, Vrwm=30V, 56.0A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFH	-	SMDJ30	TVS	Vrwm=30V, Vbr=33.3..42.2V, Ipp=56.1A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFH	-	SMLJ30	TVS	Vrwm=30V, Vbr=33.3..40.7V, Ipp=56.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HFH	-	TV30C300K-G	TVS	Vrwm=30.0V, Vbr=33.30..40.70V, Ipp=56.07A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFK	-	3.0SMCJ30A	TVS	Vbr=33.3..38.3V, Vrwm=30V, 62.0A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFK	-	CD214L-T30ALF	TVS	Vbr=33.30..36.80V, Vrwm=30V, Irsm=62.0A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFK	-	SMDJ30A	TVS	Vrwm=30V, Vbr=33.3..38.3V, Ipp=62.0A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFK	-	SMLJ30A	TVS	Vbr=33.30..36.80V, Vrwm=30V, Irsm=62.0A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFK	-	TV30C300J-G	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=61.98A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFL	-	3.0SMCJ33	TVS	Vbr=36.7..46.5V, Vrwm=33V, 50.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFL	-	3T110CLC	Thy-SPD	Vdrm=90V, Vs=130V, Ipp=2.2A(1ms), 90pF	DO-214AA	1d	1a	Lfr
HFL	-	SMDJ33	TVS	Vrwm=33V, Vbr=36.7..46.5V, Ipp=50.8A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFL	-	SMLJ33	TVS	Vrwm=33V, Vbr=36.7..44.9V, Ipp=50.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HFL	-	TV30C330K-G	TVS	Vrwm=33.0V, Vbr=36.70..44.90V, Ipp=50.85A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFM	-	3.0SMCJ33A	TVS	Vbr=36.7..42.2V, Vrwm=33V, 56.2A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFM	-	CD214L-T33ALF	TVS	Vbr=36.70..40.60V, Vrwm=33V, Irsm=56.2A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFM	-	SMDJ33A	TVS	Vrwm=33V, Vbr=36.7..42.2V, Ipp=56.3A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFM	-	SMLJ33A	TVS	Vbr=36.70..40.60V, Vrwm=33V, Irsm=56.2A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFM	-	TV30C330J-G	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=56.29A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFN	-	3.0SMCJ36	TVS	Vbr=40.0..50.7V, Vrwm=36V, 46.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFN	-	SMDJ36	TVS	Vrwm=36V, Vbr=40.0..50.7V, Ipp=46.7A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFN	-	SMLJ36	TVS	Vrwm=36V, Vbr=40.0..48.9V, Ipp=46.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HFN	-	TV30C360K-G	TVS	Vrwm=36.0V, Vbr=40.0..48.90V, Ipp=46.66A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFP	-	3.0SMCJ36A	TVS	Vbr=40.0..46.0V, Vrwm=36V, 51.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFP	-	CD214L-T36ALF	TVS	Vbr=40.0..44.20V, Vrwm=36V, Irsm=51.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFP	-	SMDJ36A	TVS	Vrwm=36V, Vbr=40.0..46.0V, Ipp=51.6A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFP	-	SMLJ36A	TVS	Vbr=40.0..44.20V, Vrwm=36V, Irsm=51.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFP	-	TV30C360J-G	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=51.64A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFQ	-	3.0SMCJ40	TVS	Vbr=44.4..56.3V, Vrwm=40V, 42.0A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFQ	-	SMDJ40	TVS	Vrwm=40V, Vbr=44.4..56.3V, Ipp=42.0A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFQ	-	SMLJ40	TVS	Vrwm=40V, Vbr=44.4..54.3V, Ipp=42.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HFQ	-	TV30C400K-G	TVS	Vrwm=40.0V, Vbr=44.40..54.30V, Ipp=42.02A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFR	-	3.0SMCJ40A	TVS	Vbr=44.4..51.1V, Vrwm=40V, 46.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFR	-	CD214L-T40ALF	TVS	Vbr=44.40..49.10V, Vrwm=40V, Irsm=46.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFR	-	SMDJ40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, Ipp=46.5A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFR	-	SMLJ40A	TVS	Vbr=44.40..49.10V, Vrwm=40V, Irsm=46.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFR	-	TV30C400J-G	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=46.51A, 3000W(1ms)	DO-214AB	1d	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
HFS	-	3.0SMCJ43	TVS	Vbr=47.8..60.5V, Vrwm=43V, 39.2A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFS	-	SMDJ43	TVS	Vrwm=43V, Vbr=47.8..60.5V, Ipp=39.1A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFS	-	SMLJ43	TVS	Vrwm=43V, Vbr=47.8..58.4V, Ipp=39.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HFS	-	TV30C430K-G	TVS	Vrwm=43.0V, Vbr=47.80..58.40V, Ipp=39.11A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFT	-	3.0SMCJ43A	TVS	Vbr=47.8..54.9V, Vrwm=43V, 43.2A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFT	-	CD214L-T43ALF	TVS	Vbr=47.80..52.80V, Vrwm=43V, Irsm=43.2A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFT	-	SMDJ43A	TVS	Vrwm=43V, Vbr=47.8..54.9V, Ipp=43.2A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFT	-	SMLJ43A	TVS	Vbr=47.80..52.80V, Vrwm=43V, Irsm=43.2A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFT	-	TV30C430J-G	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=43.23A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFU	-	3.0SMCJ45	TVS	Vbr=50.0..63.3V, Vrwm=45V, 37.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFU	-	SMDJ45	TVS	Vrwm=45V, Vbr=50.0..63.3V, Ipp=37.4A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFU	-	SMLJ45	TVS	Vrwm=45V, Vbr=50.0..61.1V, Ipp=37.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HFU	-	TV30C450K-G	TVS	Vrwm=45.0V, Vbr=50.0..61.10V, Ipp=37.36A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFV	-	3.0SMCJ45A	TVS	Vbr=50.0..57.5V, Vrwm=45V, 41.2A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFV	-	CD214L-T45ALF	TVS	Vbr=50.0..55.30V, Vrwm=45V, Irsm=41.2A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFV	-	SMDJ45A	TVS	Vrwm=45V, Vbr=50.0..57.5V, Ipp=41.3A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFV	-	SMLJ45A	TVS	Vbr=50.0..55.30V, Vrwm=45V, Irsm=41.2A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFV	-	TV30C450J-G	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=41.27A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFW	-	3.0SMCJ48	TVS	Vbr=53.3..67.5V, Vrwm=48V, 35.0A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFW	-	SMDJ48	TVS	Vrwm=48V, Vbr=53.3..67.5V, Ipp=35.1A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFW	-	SMLJ48	TVS	Vrwm=48V, Vbr=53.3..65.1V, Ipp=35.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HFW	-	TV30C480K-G	TVS	Vrwm=48.0V, Vbr=53.30..65.10V, Ipp=35.09A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFX	-	3.0SMCJ48A	TVS	Vbr=53.3..61.3V, Vrwm=48V, 38.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFX	-	CD214L-T48ALF	TVS	Vbr=53.30..58.90V, Vrwm=48V, Irsm=38.8A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFX	-	SMDJ48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, Ipp=38.8A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFX	-	SMLJ48A	TVS	Vbr=53.30..58.90V, Vrwm=48V, Irsm=38.8A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFX	-	TV30C480J-G	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=38.76A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFY	-	3.0SMCJ51	TVS	Vbr=56.7..71.8V, Vrwm=51V, 37.0A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFY	-	SMDJ51	TVS	Vrwm=51V, Vbr=56.7..71.8V, Ipp=32.9A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFY	-	SMLJ51	TVS	Vrwm=51V, Vbr=56.7..69.3V, Ipp=37.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HFY	-	TV30C510K-G	TVS	Vrwm=51.0V, Vbr=56.70..69.30V, Ipp=32.93A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HFZ	-	3.0SMCJ51A	TVS	Vbr=56.7..65.2V, Vrwm=51V, 36.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HFZ	-	CD214L-T51ALF	TVS	Vbr=56.70..62.70V, Vrwm=51V, Irsm=36.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFZ	-	SMDJ51A	TVS	Vrwm=51V, Vbr=56.7..65.2V, Ipp=36.4A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HFZ	-	SMLJ51A	TVS	Vbr=56.70..62.70V, Vrwm=51V, Irsm=36.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HFZ	-	TV30C510J-G	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=36.41A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HG	-	3T130C	Thy-SPD	Vdrm=120V, Vs=160V, Ipp=100A, 70pF	DO-214AA	1d	1a	Mde
HG	-	BZX585-C30	Zener diode	30V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HG	-	CD214A-T6.0A	TVS	Vrwm=6.0V, Irsm=38.8A, 400W(1ms)	DO-214AC	1d	1a	Brn
HG	-	DDZ9688	Zener diode	4.7V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HG	-	P1300SC	Thy-SPD	Vdrm=120V, Vs=160V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
HG	-	P4SMAJ6.0A	TVS	Vrwm=6V, 38.8A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HG	-	PZU11B2	Zener diode	10.76..11.22V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HG	-	SMAJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 38.8A, 400W(1ms)	DO-214AC	1d	1m	Di
HG	-	SMF13A	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, 9.3A, 200W(10/1000μs)	SOD-123FL	7d	1a	Ers
HG	-	SMF6.0A	TVS	Vrwm=6V, Vbr=6.7..7.4V, Ipp=19.4A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
HG	-	T130CB-LC	Thy-SPD	V Of-St=120V, Vs=160V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
HG	-	TV02W130-G	TVS	Vrwm=13V, Vbr=14.4..15.9V, Ipp=9.30A, 200W(1ms)	SOD-123	5d	2o	Cmc
HG	-	TV04A351JB-G	TVS	Vrwm=350.0V, Vbr=391.0..432.0V, Ipp=0.71A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
HG	-	Z2SMB56	Zener diode	56V±5%, Izt=10mA, 2W	DO-214AA	1d	2j	Fag
HGA	-	TV30C800K-G	TVS	Vrwm=80.0V, Vbr=88.96..108.80V, Ipp=20.95A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGB	-	TV30C800J-G	TVS	Vrwm=80.0V, Vbr=88.80..97.60V, Ipp=23.15A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGD	-	3.0SMCJ54	TVS	Vbr=60.0..76.0V, Vrwm=54V, 31.2A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGD	-	SMDJ54	TVS	Vrwm=54V, Vbr=60.0..76.0V, Ipp=31.2A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGD	-	SMLJ54	TVS	Vrwm=54V, Vbr=60.0..73.3V, Ipp=31.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HGD	-	TV30C540K-G	TVS	Vrwm=54.0V, Vbr=60.0..73.30V, Ipp=31.15A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGE	-	3.0SMCJ54A	TVS	Vbr=60.0..69.0V, Vrwm=54V, 34.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGE	-	CD214L-T54ALF	TVS	Vbr=60.0..66.30V, Vrwm=54V, Irsm=34.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGE	-	SMDJ54A	TVS	Vrwm=54V, Vbr=60.0..69.0V, Ipp=34.4A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGE	-	SMLJ54A	TVS	Vbr=60.0..66.30V, Vrwm=54V, Irsm=34.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGE	-	TV30C540J-G	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=34.44A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGF	-	3.0SMCJ58	TVS	Vbr=64.4..81.6V, Vrwm=58V, 39.2A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGF	-	SMDJ58	TVS	Vrwm=58V, Vbr=64.4..81.6V, Ipp=29.1A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGF	-	SMLJ58	TVS	Vrwm=58V, Vbr=64.4..78.7V, Ipp=39.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HGF	-	TV30C580K-G	TVS	Vrwm=58.0V, Vbr=64.40..78.70V, Ipp=29.13A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGG	-	3.0SMCJ58A	TVS	Vbr=64.4..74.1V, Vrwm=58V, 32.0A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGG	-	CD214L-T58ALF	TVS	Vbr=64.40..71.20V, Vrwm=58V, Irsm=32.0A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGG	-	SMDJ58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, Ipp=32.1A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGG	-	SMLJ58A	TVS	Vbr=64.40..71.20V, Vrwm=58V, Irsm=32.0A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGG	-	TV30C580J-G	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=32.05A, 3000W(1ms)	DO-214AB	1d	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
HGH	-	3.0SMCJ60	TVS	Vbr=66.7..84.5V, Vrwm=60V, 28.0A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGH	-	SMDJ60	TVS	Vrwm=60V, Vbr=66.7..84.5V, Ipp=28.0A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGH	-	SMLJ60	TVS	Vrwm=60V, Vbr=66.7..81.5V, Ipp=28.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HGH	-	TV30C600K-G	TVS	Vrwm=60.0V, Vbr=66.70..81.50V, Ipp=28.04A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGK	-	3.0SMCJ60A	TVS	Vbr=66.7..76.7V, Vrwm=60V, 31.0A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGK	-	CD214L-T60ALF	TVS	Vbr=66.70..73.70V, Vrwm=60V, Irsm=31.0A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGK	-	SMDJ60A	TVS	Vrwm=60V, Vbr=66.7..76.7V, Ipp=31.0A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGK	-	SMLJ60A	TVS	Vbr=66.70..73.70V, Vrwm=60V, Irsm=31.0A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGK	-	TV30C600J-G	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=30.99A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGL	-	3.0SMCJ64	TVS	Vbr=71.1..90.1V, Vrwm=64V, 26.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGL	-	3T130CLC	Thy-SPD	Vdrm=120V, Vs=160V, Ipp=2.2A(1ms), 70pF	DO-214AA	1d	1a	Lfr
HGL	-	SMDJ64	TVS	Vrwm=64V, Vbr=71.1..90.1V, Ipp=26.3A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGL	-	SMLJ64	TVS	Vrwm=64V, Vbr=71.1..86.9V, Ipp=26.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HGL	-	TV30C640K-G	TVS	Vrwm=64.0V, Vbr=71.10..86.90V, Ipp=26.32A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGM	-	3.0SMCJ64A	TVS	Vbr=71.1..81.8V, Vrwm=64V, 29.2A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGM	-	CD214L-T64ALF	TVS	Vbr=71.10..78.60V, Vrwm=64V, Irsm=29.2A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGM	-	SMDJ64A	TVS	Vrwm=64V, Vbr=71.1..81.8V, Ipp=29.1A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGM	-	SMLJ64A	TVS	Vbr=71.10..78.60V, Vrwm=64V, Irsm=29.2A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGM	-	TV30C640J-G	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=29.13A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGN	-	3.0SMCJ70	TVS	Vbr=77.8..98.6V, Vrwm=70V, 24.0A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGN	-	SMDJ70	TVS	Vrwm=70V, Vbr=77.8..98.6V, Ipp=24.0A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGN	-	SMLJ70	TVS	Vrwm=70V, Vbr=77.8..95.1V, Ipp=24.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HGN	-	TV30C700K-G	TVS	Vrwm=70.0V, Vbr=77.80..95.10V, Ipp=24.0A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGP	-	3.0SMCJ70A	TVS	Vbr=77.8..89.5V, Vrwm=70V, 26.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGP	-	CD214L-T70ALF	TVS	Vbr=77.80..86.0V, Vrwm=70V, Irsm=26.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGP	-	SMDJ70A	TVS	Vrwm=70V, Vbr=77.8..89.5V, Ipp=26.5A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGP	-	SMLJ70A	TVS	Vbr=77.80..86.0V, Vrwm=70V, Irsm=26.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGP	-	TV30C700J-G	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=26.55A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGQ	-	3.0SMCJ75	TVS	Vbr=83.3..105.7V, Vrwm=75V, 22.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGQ	-	SMDJ75	TVS	Vrwm=75V, Vbr=83.0..105.7V, Ipp=22.4A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGQ	-	SMLJ75	TVS	Vrwm=75V, Vbr=83.3..102V, Ipp=22.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HGQ	-	TV30C750K-G	TVS	Vrwm=75.0V, Vbr=83.30..102.0V, Ipp=22.39A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGR	-	3.0SMCJ75A	TVS	Vbr=83.3..95.8V, Vrwm=75V, 24.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGR	-	CD214L-T75ALF	TVS	Vbr=83.30..92.10V, Vrwm=75V, Irsm=24.8A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGR	-	SMDJ75A	TVS	Vrwm=75V, Vbr=83.0..95.8V, Ipp=24.8A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGR	-	SMLJ75A	TVS	Vbr=83.30..92.10V, Vrwm=75V, Irsm=24.8A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGR	-	TV30C750J-G	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=24.79A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGS	-	3.0SMCJ78	TVS	Vbr=86.7..109.8V, Vrwm=78V, 21.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGS	-	SMDJ78	TVS	Vrwm=78V, Vbr=86.0..109.8V, Ipp=21.6A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGS	-	SMLJ78	TVS	Vrwm=78V, Vbr=86.7..106V, Ipp=21.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HGS	-	TV30C780K-G	TVS	Vrwm=78.0V, Vbr=86.70..106.0V, Ipp=21.58A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGT	-	3.0SMCJ78A	TVS	Vbr=86.7..99.7V, Vrwm=78V, 22.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGT	-	CD214L-T78ALF	TVS	Vbr=86.70..95.80V, Vrwm=78V, Irsm=22.8A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGT	-	SMDJ78A	TVS	Vrwm=78V, Vbr=86.0..99.7V, Ipp=23.8A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGT	-	SMLJ78A	TVS	Vbr=86.70..95.80V, Vrwm=78V, Irsm=22.8A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGT	-	TV30C780J-G	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=23.81A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGU	-	3.0SMCJ85	TVS	Vbr=94.4..119.2V, Vrwm=85V, 19.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGU	-	SMDJ85	TVS	Vrwm=85V, Vbr=94.0..119.2V, Ipp=19.9A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGU	-	SMLJ85	TVS	Vrwm=85V, Vbr=94.4..115V, Ipp=19.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HGU	-	TV30C850K-G	TVS	Vrwm=85.0V, Vbr=94.40..115.0V, Ipp=19.87A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGV	-	3.0SMCJ85A	TVS	Vbr=94.4..108.2V, Vrwm=85V, 20.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGV	-	CD214L-T85ALF	TVS	Vbr=94.40..104.30V, Vrwm=85V, Irsm=20.8A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGV	-	SMDJ85A	TVS	Vrwm=85V, Vbr=94.0..108.2V, Ipp=21.9A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGV	-	SMLJ85A	TVS	Vbr=94.40..104.30V, Vrwm=85V, Irsm=20.8A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGV	-	TV30C850J-G	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=21.90A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGW	-	3.0SMCJ90	TVS	Vbr=100..126.5V, Vrwm=90V, 18.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGW	-	SMDJ90	TVS	Vrwm=90V, Vbr=100..126.5V, Ipp=18.8A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGW	-	SMLJ90	TVS	Vrwm=90V, Vbr=100..122V, Ipp=18.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HGW	-	TV30C900K-G	TVS	Vrwm=90V, Vbr=100.0..122.0V, Ipp=18.75A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGX	-	3.0SMCJ90A	TVS	Vbr=100..115.5V, Vrwm=90V, 20.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGX	-	CD214L-T90ALF	TVS	Vbr=100.0..110.50V, Vrwm=90V, Irsm=20.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGX	-	SMDJ90A	TVS	Vrwm=90V, Vbr=100..115.5V, Ipp=20.5A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGX	-	SMLJ90A	TVS	Vbr=100.0..110.50V, Vrwm=90V, Irsm=20.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGX	-	TV30C900J-G	TVS	Vrwm=90V, Vbr=100.0..111.0V, Ipp=20.55A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGY	-	3.0SMCJ100	TVS	Vbr=111..141.0V, Vrwm=100V, 16.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGY	-	SMDJ100	TVS	Vrwm=100V, Vbr=111..141.0V, Ipp=16.8A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGY	-	SMLJ100	TVS	Vrwm=100V, Vbr=111..136V, Ipp=16.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HGY	-	TV30C101K-G	TVS	Vrwm=100.0V, Vbr=111.0..136.0V, Ipp=16.76A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HGZ	-	3.0SMCJ100A	TVS	Vbr=111..128.0V, Vrwm=100V, 18.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HGZ	-	CD214L-T100ALF	TVS	Vbr=111.0..122.70V, Vrwm=100V, Irsm=18.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
HGZ	-	SMDJ100A	TVS	Vrwm=100V, Vbr=111..128.0V, Ipp=18.5A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HGZ	-	SMLJ100A	TVS	Vbr=111.0..122.70V, Vrwm=100V, Irsm=18.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HGZ	-	TV30C101J-G	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=18.52A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HH	-	3T150C	Thy-SPD	Vdrm=140V, Vs=180V, Ipp=100A, 70pF	DO-214AA	1d	1a	Mde
HH	-	BZT52B7V5WT	Zener diode	7.350..7.650V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
HH	-	BZX585-C33	Zener diode	33V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HH	-	DDZ9689	Zener diode	5.1V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HH	-	DDZ9689S	Zener diode	5.1V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
HH	-	DDZ9689T	Zener diode	5.1V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
HH	-	MM5Z7B5H	Zener diode	7.35..7.65V, Zzt=30Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
HH	-	P1500SC	Thy-SPD	Vdrm=140V, Vs=180V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
HH	-	P4SMAJ6.5	TVS	Vrwm=6.5V, 32.5A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HH	-	PZU12B2	Zener diode	11.74..12.24V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HH	-	RL52Z7V5	Zener diode	7.35..7.65V, Zzt=30Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
HH	-	T150CB-LC	Thy-SPD	V Of-St=140V, Vs=180V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
HH	-	Z2SMB62	Zener diode	62V±5%, Izt=10mA, 2W	DO-214AA	1d	2j	Fag
HHA	-	TV30C141K-G	TVS	Vrwm=140V, Vbr=155.68..190.4V, Ipp=11.97A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHB	-	TV30C141J-G	TVS	Vrwm=140V, Vbr=155.0..171.0V, Ipp=13.23A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHD	-	3.0SMCJ110	TVS	Vbr=122..154.5V, Vrwm=110V, 15.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHD	-	SMDJ110	TVS	Vrwm=110V, Vbr=122..154.5V, Ipp=15.3A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HHD	-	SMLJ110	TVS	Vrwm=110V, Vbr=122..149V, Ipp=15.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HHD	-	TV30C111K-G	TVS	Vrwm=110.0V, Vbr=122.0..149.0V, Ipp=15.31A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHE	-	3.0SMCJ110A	TVS	Vbr=122..140.5V, Vrwm=110V, 16.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHE	-	CD214L-T110ALF	TVS	Vbr=122.0..134.80V, Vrwm=110V, Irsm=16.8A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HHE	-	SMDJ110A	TVS	Vrwm=110V, Vbr=122..140.5V, Ipp=16.9A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HHE	-	SMLJ110A	TVS	Vbr=122.0..134.80V, Vrwm=110V, Irsm=16.8A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HHE	-	TV30C111J-G	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=16.9A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHF	-	3.0SMCJ120	TVS	Vbr=133..169.0V, Vrwm=120V, 14.0A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHF	-	SMDJ120	TVS	Vrwm=120V, Vbr=133..169.0V, Ipp=14.0A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HHF	-	SMLJ120	TVS	Vrwm=120V, Vbr=133..163V, Ipp=14.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HHF	-	TV30C121K-G	TVS	Vrwm=120.0V, Vbr=133.0..163.0V, Ipp=14.02A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHG	-	3.0SMCJ120A	TVS	Vbr=133..153.0V, Vrwm=120V, 15.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHG	-	CD214L-T120ALF	TVS	Vbr=133.0..147.0V, Vrwm=120V, Irsm=15.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HHG	-	SMDJ120A	TVS	Vrwm=120V, Vbr=133..153.0V, Ipp=15.5A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HHG	-	SMLJ120A	TVS	Vbr=133.0..147.0V, Vrwm=120V, Irsm=15.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HHG	-	TV30C121J-G	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=15.54A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHH	-	3.0SMCJ130	TVS	Vbr=144..182.5V, Vrwm=130V, 13.0A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHH	-	CD214L-T130ALF	TVS	Vbr=144.0..159.20V, Vrwm=130V, Irsm=14.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HHH	-	SMDJ130	TVS	Vrwm=130V, Vbr=144..182.5V, Ipp=13.0A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HHH	-	SMLJ130	TVS	Vrwm=130V, Vbr=144..176V, Ipp=13.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HHH	-	SMLJ130A	TVS	Vbr=144.0..159.20V, Vrwm=130V, Irsm=14.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HHH	-	TV30C131K-G	TVS	Vrwm=130V, Vbr=144.0..176.0V, Ipp=12.99A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHK	-	3.0SMCJ130A	TVS	Vbr=144..165.5V, Vrwm=130V, 14.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHK	-	SMDJ130A	TVS	Vrwm=130V, Vbr=144..165.5V, Ipp=14.4A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HHK	-	SMLJ130A	TVS	Vrwm=130V, Vbr=144..159V, Ipp=14.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HHK	-	TV30C131J-G	TVS	Vrwm=130V, Vbr=144.0..159.0V, Ipp=14.35A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHL	-	3.0SMCJ150	TVS	Vbr=167..211.5V, Vrwm=150V, 11.2A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHL	-	3T150CLC	Thy-SPD	Vdrm=140V, Vs=180V, Ipp=2.2A(1ms), 70pF	DO-214AA	1d	1a	Lfr
HHL	-	SMDJ150	TVS	Vrwm=150V, Vbr=167..211.5V, Ipp=11.2A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HHL	-	SMLJ150	TVS	Vrwm=150V, Vbr=167..204V, Ipp=11.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HHL	-	TV30C151K-G	TVS	Vrwm=150.0V, Vbr=167.0..204.0V, Ipp=11.19A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHM	-	3.0SMCJ150A	TVS	Vbr=167..192.5V, Vrwm=150V, 12.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHM	-	CD214L-T150ALF	TVS	Vbr=167.0..184.60V, Vrwm=150V, Irsm=12.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HHM	-	SMDJ150A	TVS	Vrwm=150V, Vbr=167..192.5V, Ipp=12.3A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HHM	-	SMLJ150A	TVS	Vbr=167.0..184.60V, Vrwm=150V, Irsm=12.4A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HHM	-	TV30C151J-G	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=12.35A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHN	-	3.0SMCJ160	TVS	Vbr=178..226.0V, Vrwm=160V, 10.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHN	-	SMDJ160	TVS	Vrwm=160V, Vbr=178..226.0V, Ipp=10.5A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HHN	-	SMLJ160	TVS	Vrwm=160V, Vbr=178..218V, Ipp=10.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HHN	-	TV30C161K-G	TVS	Vrwm=160.0V, Vbr=178.0..218.0V, Ipp=10.45A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHP	-	3.0SMCJ160A	TVS	Vbr=178..205.0V, Vrwm=160V, 11.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHP	-	CD214L-T160ALF	TVS	Vbr=178.0..196.70V, Vrwm=160V, Irsm=11.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HHP	-	SMDJ160A	TVS	Vrwm=160V, Vbr=178..205.0V, Ipp=11.6A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HHP	-	SMLJ160A	TVS	Vbr=178.0..196.70V, Vrwm=160V, Irsm=11.6A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HHP	-	TV30C161J-G	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=11.58A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHQ	-	3.0SMCJ170	TVS	Vbr=189..239.5V, Vrwm=170V, 9.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHQ	-	SMDJ170	TVS	Vrwm=170V, Vbr=189..239.5V, Ipp=9.9A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HHQ	-	SMLJ170	TVS	Vrwm=170V, Vbr=189..231V, Ipp=9.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
HHQ	-	TV30C171K-G	TVS	Vrwm=170.0V, Vbr=189.0..231.0V, Ipp=9.87A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHR	-	3.0SMCJ170A	TVS	Vbr=189..217.5V, Vrwm=170V, 11.0A, 3000W(1ms)	DO-214AB	1d	1g	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
HHR	-	CD214L-T170ALF	TVS	Vbr=189.0..208.90V, Vrwm=170V, Irsm=11.0A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HHR	-	SMDJ170A	TVS	Vrwm=170V, Vbr=189..217.5V, Ipp=10.9A, 3000W(1ms)	DO-214AB	1d	1b	Rul
HHR	-	SMLJ170A	TVS	Vbr=189.0..208.90V, Vrwm=170V, Irsm=11.0A, 3000W(1ms)	DO-214AB	1d	1a	Brn
HHR	-	TV30C171J-G	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=10.91A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHS	-	3.0SMCJ180	TVS	Vbr=198..253.8V, Vrwm=180V, 9.3A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHS	-	TV30C181K-G	TVS	Vrwm=180.0V, Vbr=200.16..244.80V, Ipp=9.31A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHT	-	3.0SMCJ180A	TVS	Vbr=198..230.4V, Vrwm=180V, 10.3A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHT	-	SMDJ180A	TVS	Vrwm=180.0V, Vbr=198.0..230.40V, Ipp=10.3A	DO-214AB	1d	1b	Rul
HHT	-	TV30C181J-G	TVS	Vrwm=180.0V, Vbr=200.0..220.0V, Ipp=10.29A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHU	-	3.0SMCJ190	TVS	Vbr=209..267.9V, Vrwm=190V, 8.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHU	-	TV30C191K-G	TVS	Vrwm=190.0V, Vbr=211.28..258.40V, Ipp=8.82A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHV	-	3.0SMCJ190A	TVS	Vbr=209..243.2V, Vrwm=190V, 9.7A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHV	-	SMDJ190A	TVS	Vrwm=190.0V, Vbr=209.0..243.20V, Ipp=9.7A	DO-214AB	1d	1b	Rul
HHV	-	TV30C191J-G	TVS	Vrwm=190.0V, Vbr=211.0..232.0V, Ipp=9.75A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHW	-	3.0SMCJ200	TVS	Vbr=220..282.0V, Vrwm=200V, 8.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHW	-	TV30C201J-G	TVS	Vrwm=200.0V, Vbr=224.0..247.0V, Ipp=9.26A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHX	-	3.0SMCJ200A	TVS	Vbr=220..256.0V, Vrwm=200V, 9.3A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHX	-	SMDJ200A	TVS	Vrwm=200.0V, Vbr=220.0..256.0V, Ipp=9.3A	DO-214AB	1d	1b	Rul
HHX	-	TV30C221J-G	TVS	Vrwm=220.0V, Vbr=246.0..272.0V, Ipp=8.43A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HHY	-	3.0SMCJ210	TVS	Vbr=231..296.1V, Vrwm=210V, 7.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHZ	-	3.0SMCJ210A	TVS	Vbr=231..268.8V, Vrwm=210V, 8.8A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HHZ	-	SMDJ210A	TVS	Vrwm=210.0V, Vbr=231.0..268.8V, Ipp=8.8A	DO-214AB	1d	1b	Rul
HHZ	-	TV30C251J-G	TVS	Vrwm=250.0V, Vbr=279.0..309.0V, Ipp=7.4A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HI	-	3T180C	Thy-SPD	Vdrm=160V, Vs=220V, Ipp=100A, 70pF	DO-214AA	1d	1a	Mde
HI	-	P1800SC	Thy-SPD	Vdrm=160V, Vs=220V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
HI	-	T180CB-LC	Thy-SPD	V Of-St=160V, Vs=220V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
HID	-	3.0SMCJ220	TVS	Vbr=242..310.2V, Vrwm=220V, 7.6A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HIE	-	3.0SMCJ220A	TVS	Vbr=242..281.6V, Vrwm=220V, 8.4A, 3000W(1ms)	DO-214AB	1d	1g	Pjt
HIE	-	SMDJ220A	TVS	Vrwm=220.0V, Vbr=242.0..281.0V, Ipp=8.4A	DO-214AB	1d	1b	Rul
HIL	-	3T180CLC	Thy-SPD	Vdrm=160V, Vs=220V, Ipp=2.2A(1ms), 70pF	DO-214AA	1d	1a	Lfr
HJ	-	3T230C	Thy-SPD	Vdrm=190V, Vs=260V, Ipp=100A, 50pF	DO-214AA	1d	1a	Mde
HJ	-	BZT52B8V2WT	Zener diode	8.036..8.364V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
HJ	-	DDZ9690	Zener diode	5.6V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HJ	-	DDZ9690S	Zener diode	5.6V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
HJ	-	DDZ9690T	Zener diode	5.6V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
HJ	-	MM5Z8B2H	Zener diode	8.036..8.364V, Zzt=30Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
HJ	-	P2300SC	Thy-SPD	Vdrm=190V, Vs=260V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
HJ	-	PZU13B2	Zener diode	12.91..13.49V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HJ	-	RL52Z8V2	Zener diode	8.036..8.364V, Zzt=30Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
HJ	-	T230CB-LC	Thy-SPD	V Of-St=190V, Vs=260V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
HJE	-	TV30C301J-G	TVS	Vrwm=300.0V, Vbr=335.0..371.0V, Ipp=6.17A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HJG	-	TV30C351J-G	TVS	Vrwm=350.0V, Vbr=391.0..432.0V, Ipp=5.29A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HJK	-	TV30C401J-G	TVS	Vrwm=400.0V, Vbr=447.0..494.0V, Ipp=4.63A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HJL	-	3T230CLC	Thy-SPD	Vdrm=190V, Vs=260V, Ipp=2.2A(1ms), 60pF	DO-214AA	1d	1a	Lfr
HJM	-	TV30C441J-G	TVS	Vrwm=440.0V, Vbr=492.0..543.0V, Ipp=4.21A, 3000W(1ms)	DO-214AB	1d	2o	Cmc
HK	-	3T260C	Thy-SPD	Vdrm=220V, Vs=300V, Ipp=100A, 50pF	DO-214AA	1d	1a	Mde
HK	-	BZT52B9V1WT	Zener diode	8.918..9.282V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
HK	-	BZX585-C36	Zener diode	36V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HK	-	CD214A-T6.5A	TVS	Vrwm=6.5V, Irsm=35.7A, 400W(1ms)	DO-214AC	1d	1a	Brn
HK	-	DDZ9691	Zener diode	6.2V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HK	-	DDZ9691S	Zener diode	6.2V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
HK	-	DDZ9691T	Zener diode	6.2V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
HK	-	MM5Z9B1H	Zener diode	8.918..9.282V, Zzt=30Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
HK	-	P2600SC	Thy-SPD	Vdrm=220V, Vs=300V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
HK	-	P4SMAJ6.5A	TVS	Vrwm=6.5V, 35.7A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HK	-	PZU14B2	Zener diode	13.7..14.3V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HK	-	RL52Z9V1	Zener diode	8.918..9.282V, Zzt=30Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
HK	-	SMAJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 35.7A, 400W(1ms)	DO-214AC	1d	1m	Di
HK	-	SMF14A	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, 8.62A, 200W(10/1000μs)	SOD-123FL	7d	1a	Ers
HK	-	SMF6.5A	TVS	Vrwm=6.5V, Vbr=7.2..8 10V, Ipp=17.9A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
HK	-	T260CB-LC	Thy-SPD	V Of-St=220V, Vs=300V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
HK	-	TV02W140-G	TVS	Vrwm=14V, Vbr=15.6..17.2V, Ipp=8.62A, 200W(1ms)	SOD-123	5d	2o	Cmc
HK	-	TV04A401JB-G	TVS	Vrwm=400.0V, Vbr=447.0..494.0V, Ipp=0.62A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
HK	-	Z2SMB68	Zener diode	68V±5%, Izt=10mA, 2W	DO-214AA	1d	2j	Fag
HKL	-	3T260CLC	Thy-SPD	Vdrm=220V, Vs=300V, Ipp=2.2A(1ms), 60pF	DO-214AA	1d	1a	Lfr
HL	-	3T310C	Thy-SPD	Vdrm=275V, Vs=350V, Ipp=100A, 40pF	DO-214AA	1d	1a	Mde
HL	-	BZX585-C39	Zener diode	39V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HL	-	DDZ9692	Zener diode	6.9V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HL	-	DDZ9692S	Zener diode	6.8V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
HL	-	DDZ9692T	Zener diode	6.8V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
HL	-	P3100SC	Thy-SPD	Vdrm=275V, Vs=350V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
HL	-	P4SMAJ7.0	TVS	Vrwm=7V, 30.1A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HL	-	PZU15B2	Zener diode	14.34..14.98V, Zzt=15Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HL	-	T310CB-LC	Thy-SPD	V Of-St=275V, Vs=350V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
HL	-	Z2SMB75	Zener diode	75V±5%, Izt=10mA, 2W	DO-214AA	1d	2j	Fag
HLL	-	3T310CLC	Thy-SPD	Vdrm=275V, Vs=350V, Ipp=2.2A(1ms), 60pF	DO-214AA	1d	1a	Lfr
HM	-	3T350C	Thy-SPD	Vdrm=300V, Vs=400V, Ipp=100A, 40pF	DO-214AA	1d	1a	Mde
HM	-	BZT52B10WT	Zener diode	9.80..10.20V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
HM	-	BZX585-C43	Zener diode	43V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HM	-	CD214A-T7.0A	TVS	Vrwm=7.0V, Irsm=33.3A, 400W(1ms)	DO-214AC	1d	1a	Brn
HM	-	DDZ9693	Zener diode	7.5V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HM	-	DDZ9693S	Zener diode	7.5V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
HM	-	DDZ9693T	Zener diode	7.5V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
HM	-	MM5ZB10H	Zener diode	9.8..10.2V, Zzt=30Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
HM	-	P3500SC	Thy-SPD	Vdrm=300V, Vs=400V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
HM	-	P4SMAJ7.0A	TVS	Vrwm=7V, 33.3A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HM	-	PZU16B2	Zener diode	15.85..16.51V, Zzt=20Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HM	-	RL52Z10	Zener diode	9.8..10.2V, Zzt=30Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
HM	-	SMAJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.6V, 33.3A, 400W(1ms)	DO-214AC	1d	1m	Di
HM	-	SMF15A	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, 8.20A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
HM	-	SMF7.0A	TVS	Vrwm=7V, Vbr=7.8..8.6 V, Ipp=16.7A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
HM	-	T350CB-LC	Thy-SPD	V Of-St=300V, Vs=400V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
HM	-	TV02W150-G	TVS	Vrwm=15V, Vbr=16.7..18.5V, Ipp=8.20A, 200W(1ms)	SOD-123	5d	2o	Cmc
HM	-	TV04A441JB-G	TVS	Vrwm=440.0V, Vbr=492.0..543.0V, Ipp=0.56A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
HM	-	Z2SMB82	Zener diode	82V±5%, Izt=10mA, 2W	DO-214AA	1d	2j	Fag
HML	-	3T350CLC	Thy-SPD	Vdrm=300V, Vs=400V, Ipp=2.2A(1ms), 60pF	DO-214AA	1d	1a	Lfr
HN	-	BZT52B11WT	Zener diode	10.78..11.22V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
HN	-	BZX585-C47	Zener diode	47V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HN	-	DDZ9694	Zener diode	8.2V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HN	-	DDZ9694S	Zener diode	8.2V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
HN	-	DDZ9694T	Zener diode	8.2V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
HN	-	MM5ZB11H	Zener diode	10.78..11.22V, Zzt=30Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
HN	-	P4SMAJ7.5	TVS	Vrwm=7.5V, 28A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HN	-	PZU18B2	Zener diode	17.56..18.35V, Zzt=20Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HN	-	RL52Z11	Zener diode	10.78..11.22V, Zzt=30Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
HN	-	Z2SMB91	Zener diode	91V±5%, Izt=5mA, 2W	DO-214AA	1d	2j	Fag
HP	-	BZT52B12WT	Zener diode	11.76..12.24V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
HP	-	BZX585-C51	Zener diode	51V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HP	-	CD214A-T7.5A	TVS	Vrwm=7.5V, Irsm=31.0A, 400W(1ms)	DO-214AC	1d	1a	Brn
HP	-	CMDZ3L9	Zener diode	3.705..4.095V, Izt=0.5mA, Zzt=900Ω, 250mW	SOD-323	5d	1a	Cen
HP	-	DDZ9696	Zener diode	9.1V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HP	-	DDZ9696S	Zener diode	9.1V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
HP	-	DDZ9696T	Zener diode	9.1V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
HP	-	KDZ12FVY	Zener diode	11.74..12.24V, Izt=5mA, Zzt=15Ω, 100mW	TFSC	7d	1a	Kec
HP	-	MM5ZB12H	Zener diode	11.76..12.24V, Zzt=35Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
HP	-	P4SMAJ7.5A	TVS	Vrwm=7.5V, 31A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HP	-	PZU20B2	Zener diode	19.52..20.39V, Zzt=20Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HP	-	RL52Z12	Zener diode	11.76..12.24V, Zzt=35Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
HP	-	SMAJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 31A, 400W(1ms)	DO-214AC	1d	1m	Di
HP	-	SMF16A	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, 7.69A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
HP	-	SMF7.5A	TVS	Vrwm=7.5V, Vbr=8.3..9.2V, Ipp=15.5A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
HP	-	TV02W160-G	TVS	Vrwm=16V, Vbr=17.8..19.7V, Ipp=7.69A, 200W(1ms)	SOD-123	5d	2o	Cmc
HP	-	Z2SMB100	Zener diode	100V±5%, Izt=5mA, 2W	DO-214AA	1d	2j	Fag
HQ	-	DDZ9697	Zener diode	10V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HQ	-	DDZ9697S	Zener diode	10V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
HQ	-	DDZ9697T	Zener diode	10V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
HQ	-	P4SMAJ8.0	TVS	Vrwm=8V, 26.5A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HQ	-	PZU22B2	Zener diode	21.54..22.47V, Zzt=25Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HQ	-	Z2SMB110	Zener diode	110V±5%, Izt=5mA, 2W	DO-214AA	1d	2j	Fag
HR	-	BZT52B13WT	Zener diode	12.74..13.26V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
HR	-	BZX585-C56	Zener diode	56V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HR	-	CD214A-T8.0A	TVS	Vrwm=8.0V, Irsm=29.4A, 400W(1ms)	DO-214AC	1d	1a	Brn
HR	-	DDZ9698	Zener diode	11V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HR	-	DDZ9698S	Zener diode	11V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
HR	-	DDZ9698T	Zener diode	11V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
HR	-	MM5ZB13H	Zener diode	12.74..13.26V, Zzt=35Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
HR	-	P4SMAJ8.0A	TVS	Vrwm=8V, 29.4A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HR	-	PZU24B2	Zener diode	23.72..24.78V, Zzt=30Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HR	-	RL52Z13	Zener diode	12.74..13.26V, Zzt=35Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
HR	-	SMAJ8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 29.4A, 400W(1ms)	DO-214AC	1d	1m	Di

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
HR	-	SMF17A	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, 7.25A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
HR	-	SMF8.0A	TVS	Vrwm=8V, Vbr=8.9..9.8V, Ipp=14.7A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
HR	-	TV02W170-G	TVS	Vrwm=17V, Vbr=18.9..20.9V, Ipp=7.25A, 200W(1ms)	SOD-123	5d	2o	Cmc
HR	-	Z2SMB120	Zener diode	120V±5%, Izt=5mA, 2W	DO-214AA	1d	2j	Fag
HS	-	3T400C	Thy-SPD	Vdrm=360V, Vs=450V, Ipp=100A, 40pF	DO-214AA	1d	1a	Mde
HS	-	BZX585-C62	Zener diode	62V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HS	-	DDZ9699	Zener diode	12V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HS	-	DDZ9699S	Zener diode	12V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
HS	-	DDZ9699T	Zener diode	12V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
HS	-	P4000SC	Thy-SPD	Vdrm=360V, Vs=150V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Mde
HS	-	P4SMAJ8.5	TVS	Vrwm=8.5V, 25.1A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HS	-	PZU4.3B3	Zener diode	4.28..4.48V, Zzt=90Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HS	-	T400CB-LC	Thy-SPD	V Of-St=360V, Vs=450V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Wtr
HS	-	Z2SMB130	Zener diode	130V±5%, Izt=5mA, 2W	DO-214AA	1d	2j	Fag
HS11	-	HSM11PT	Si-diode	Rectifer, U-fast, 50V, 1A	DO-214AC	1d	1a	Chm
HS12	-	HSM12PT	Si-diode	Rectifer, U-fast, 100V, 1A	DO-214AC	1d	1a	Chm
HS13	-	HSM13PT	Si-diode	Rectifer, U-fast, 200V, 1A	DO-214AC	1d	1a	Chm
HS14	-	HSM14PT	Si-diode	Rectifer, U-fast, 300V, 1A	DO-214AC	1d	1a	Chm
HS15	-	HSM15PT	Si-diode	Rectifer, U-fast, 400V, 1A	DO-214AC	1d	1a	Chm
HS16	-	HSM16PT	Si-diode	Rectifer, U-fast, 600V, 1A	DO-214AC	1d	1a	Chm
HS17	-	HSM17PT	Si-diode	Rectifer, U-fast, 800V, 1A	DO-214AC	1d	1a	Chm
HS18	-	HSM18PT	Si-diode	Rectifer, U-fast, 1000V, 1A	DO-214AC	1d	1a	Chm
HS21	-	HSM21PT	Si-diode	Rectifer, U-fast, 50V, 2A	DO-214AC	1d	1a	Chm
HS22	-	HSM22PT	Si-diode	Rectifer, U-fast, 100V, 2A	DO-214AC	1d	1a	Chm
HS23	-	HSM23PT	Si-diode	Rectifer, U-fast, 200V, 2A	DO-214AC	1d	1a	Chm
HS24	-	HSM24PT	Si-diode	Rectifer, U-fast, 300V, 2A	DO-214AC	1d	1a	Chm
HS25	-	HSM25PT	Si-diode	Rectifer, U-fast, 400V, 2A	DO-214AC	1d	1a	Chm
HS26	-	HSM26PT	Si-diode	Rectifer, U-fast, 600V, 2A	DO-214AC	1d	1a	Chm
HS27	-	HSM27PT	Si-diode	Rectifer, U-fast, 800V, 2A	DO-214AC	1d	1a	Chm
HS28	-	HSM28PT	Si-diode	Rectifer, U-fast, 1000V, 2A	DO-214AC	1d	1a	Chm
HT	-	BZX585-C68	Zener diode	68V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HT	-	CD214A-T8.5A	TVS	Vrwm=8.5V, Irsm=27.7A, 400W(1ms)	DO-214AC	1d	1a	Brn
HT	-	DDZ9700	Zener diode	13V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HT	-	DDZ9700S	Zener diode	13V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
HT	-	DDZ9700T	Zener diode	13V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
HT	-	P4SMAJ8.5A	TVS	Vrwm=8.5V, 27.7A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HT	-	PZU4.7B3	Zener diode	4.69..4.9V, Zzt=80Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HT	-	SMAJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 27.8A, 400W(1ms)	DO-214AC	1d	1m	Di
HT	-	SMF18A	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, 6.85A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
HT	-	SMF8.5A	TVS	Vrwm=8.5V, Vbr=9.4..10.4V, Ipp=13.9A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
HT	-	TV02W180-G	TVS	Vrwm=18V, Vbr=20.0..22.1V, Ipp=6.85A, 200W(1ms)	SOD-123	5d	2o	Cmc
HT	-	Z2SMB150	Zener diode	150V±5%, Izt=5mA, 2W	DO-214AA	1d	2j	Fag
HU	-	BZX585-C75	Zener diode	75V±5%, If=200mA, 300mW	SOD-523	6d	1a	Phi
HU	-	DDZ9701	Zener diode	14V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HU	-	DDZ9701S	Zener diode	14V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
HU	-	DDZ9701T	Zener diode	14V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
HU	-	P4SMAJ9.0	TVS	Vrwm=9V, 23.6A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HU	-	PZU5.1B3	Zener diode	5.14..5.37V, Zzt=60Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HU	-	Z2SMB160	Zener diode	160V±5%, Izt=5mA, 2W	DO-214AA	1d	2j	Fag
HV	-	CD214A-T9.0A	TVS	Vrwm=9.0V, Irsm=26.0A, 400W(1ms)	DO-214AC	1d	1a	Brn
HV	-	DDZ9702	Zener diode	15V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HV	-	DDZ9702S	Zener diode	15V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
HV	-	DDZ9702T	Zener diode	15V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
HV	-	P4SMAJ9.0A	TVS	Vrwm=9V, 26A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HV	-	PZU5.6B3	Zener diode	5.67..5.92V, Zzt=40Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HV	-	SMAJ9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, 26A, 400W(1ms)	DO-214AC	1d	1m	Di
HV	-	SMF20A	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, 6.17A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
HV	-	SMF9.0A	TVS	Vrwm=9V, Vbr=10..11.1V, Ipp=13A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
HV	-	TV02W200-G	TVS	Vrwm=20V, Vbr=22.2..24.5V, Ipp=6.17A, 200W(1ms)	SOD-123	5d	2o	Cmc
HV	-	Z2SMB180	Zener diode	180V±5%, Izt=5mA, 2W	DO-214AA	1d	2j	Fag
HW	-	DDZ9703	Zener diode	16V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HW	-	DDZ9703S	Zener diode	16V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
HW	-	DDZ9703T	Zener diode	16V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
HW	-	P4SMAJ10	TVS	Vrwm=10V, 21.2A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HW	-	PZU6.2B3	Zener diode	6.26..6.53V, Zzt=30Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HW	-	Z2SMB200	Zener diode	200V±5%, Izt=5mA, 2W	DO-214AA	1d	2j	Fag
HX	-	BZT52B15WT	Zener diode	14.70..15.30V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
HX	-	CD214A-T10A	TVS	Vrwm=10V, Irsm=23.5A, 400W(1ms)	DO-214AC	1d	1a	Brn
HX	-	MM5ZB15H	Zener diode	14.7..15.3V, Zzt=40Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
HX	-	P4SMAJ10A	TVS	Vrwm=10V, 23.5A, 400W (1ms)	DO-214AC	1d	1a	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
HX	-	PZU6.8B3	Zener diode	6.86..7.14V, Zzt=20Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HX	-	RL52Z15	Zener diode	14.7..15.3V, Zzt=40Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
HX	-	SMAJ10A	TVS	Vrwm=10V, Vbr=11.1..12.3V, 21.7A, 400W(1ms)	DO-214AC	1d	1m	Di
HX	-	SMF10A	TVS	Vrwm=10V, Vbr=11.1..12.3 V, Ipp=11.8A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
HX	-	SMF22A	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, 5.63A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
HX	-	TV02W220-G	TVS	Vrwm=22V, Vbr=24.4..26.9V, Ipp=5.63A, 200W(1ms)	SOD-123	5d	2o	Cmc
HY	-	BZT52B16WT	Zener diode	15.68..16.32V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
HY	-	DDZ9705	Zener diode	18V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
HY	-	DDZ9705S	Zener diode	18V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
HY	-	DDZ9705T	Zener diode	18V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
HY	-	KDZ3.9VVY	Zener diode	3.89..4.16V, Izt=5mA, Zzt=130Ω, 100mW	VSC	7d	1a	Kec
HY	-	MM5ZB16H	Zener diode	15.68..16.32V, Zzt=40Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
HY	-	P4SMAJ11	TVS	Vrwm=11V, 20A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HY	-	PZU7.5B3	Zener diode	7.52..7.84V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HY	-	RL52Z16	Zener diode	15.68..16.32V, Zzt=40Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
HZ	-	BZT52B12S	Zener diode	11.76..12.24V, Izt=5mA, Zzt=25Ω, 200mW	SOD-323FL	7d	1a	Tsc
HZ	-	BZT52B18WT	Zener diode	17.64..18.36V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
HZ	-	CD214A-T11A	TVS	Vrwm=11V, Irsm=22.0A, 400W(1ms)	DO-214AC	1d	1a	Brn
HZ	-	MM3Z12VB	Zener diode	11.76..12.24V, Zzt=23Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
HZ	-	MM3Z12VBW	Zener diode	11.76..12.24V, Izt=5mA, Zzt=25Ω, 200mW	SOD-323FL	7d	1a	Tac
HZ	-	MM5ZB18H	Zener diode	17.64..18.36V, Zzt=45Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
HZ	-	P4SMAJ11A	TVS	Vrwm=11V, 22A, 400W (1ms)	DO-214AC	1d	1a	Pjt
HZ	-	PZU8.2B3	Zener diode	8.28..8.64V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
HZ	-	RL52Z18	Zener diode	17.64..18.36V, Zzt=45Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
HZ	-	SMAJ11A	TVS	Vrwm=11V, Vbr=12.2..13.5V, 22A, 400W(1ms)	DO-214AC	1d	1m	Di
HZ	-	SMF11A	TVS	Vrwm=11V, Vbr=12.2..13.5V, Ipp=11A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
HZ	-	SMF24A	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, 5.14A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
HZ	-	TCMM3Z12VB	Zener diode	12V±2%, Izt=5mA, Zzt=23Ω, 200mW	SOD-323FL	7d	1a	Tac
HZ	-	TV02W240-G	TVS	Vrwm=24V, Vbr=26.7..29.5V, Ipp=5.14A, 200W(1ms)	SOD-123	5d	2o	Cmc
I	-	1N6263WT	Si-diode	SBD, VHF/UHF-Dem, 60V, 15mA, Vf<1V(15mA), 2pF	SOD-523FL	7d	1a	Sme
I	-	MMSZ5235BPT	Zener diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 225mW	SOD-523	6d	1a	Chm
I	au	MMSZ5259BPT	Zener diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 225mW	SOD-523	6d	1a	Chm
I.	-	MMSZ5235SPT	Zener diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 225mW	SOD-523	6d	1a	Chm
I.	au	MMSZ5259SPT	Zener diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 225mW	SOD-523	6d	1a	Chm
I0	-	MMPZ5239SPT	Zener diode	8.918..9.282V, Izt=5mA, Zzt=10Ω, 225mW	SOD-323	5d	1a	Chm
I1	-	SK12B	Si-diode	SBR, 20V, 1A, Vf<0.5V(1A)	DO-214AA	1d	2j	Fag
I2	-	SK13B	Si-diode	SBR, 30V, 1A, Vf<0.5V(1A)	DO-214AA	1d	2j	Fag
I3	-	SK14B	Si-diode	SBR, 40V, 1A, Vf<0.5V(1A)	DO-214AA	1d	2j	Fag
I4	-	SK15B	Si-diode	SBR, 50V, 1A, Vf<0.75V(1A)	DO-214AA	1d	2j	Fag
I5	-	SK16B	Si-diode	SBR, 60V, 1A, Vf<0.75V(1A)	DO-214AA	1d	2j	Fag
I6	-	SK19B	Si-diode	SBR, 90V, 1A, Vf<0.85V(1A)	DO-214AA	1d	2j	Fag
I7	-	SK110B	Si-diode	SBR, 100V, 1A, Vf<0.85V(1A)	DO-214AA	1d	2j	Fag
I8	-	BZT52C5V6WT	Zener diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523	6d	1a	Ttr
I8	-	MM5Z5V6	Zener diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-523	6d	1a	Eic
I8	-	MM5Z5V6H	Zener diode	5.2..6V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523	6d	1a	Zow
I8	-	SK115B	Si-diode	SBR, 150V, 1A, Vf<0.95V(1A)	DO-214AA	1d	2j	Fag
I9	-	BZT52C68WT	Zener diode	64..72V, Izt=1mA, 200mW	SOD-523	6d	1a	Ttr
I9	-	MM5Z68H	Zener diode	64..72V, Izt=1mA, Zzt=240Ω, 200mW	SOD-523	6d	1a	Zow
I9	-	MM5Z68V	Zener diode	68V±5%, Izt=2mA, Zzt=240Ω, 200mW	SOD-523	6d	1a	Eic
IA	-	SK32A	Si-diode	SBR, 20V, 3A, Vf<0.55V(3A)	DO-214AC	1d	2j	Fag
IB	-	SK34A	Si-diode	SBR, 40V, 3A, Vf<0.55V(3A)	DO-214AC	1d	2j	Fag
IC	-	SK36A	Si-diode	SBR, 60V, 3A, Vf<0.75V(3A)	DO-214AC	1d	2j	Fag
ID	-	P4SMAJ12	TVS	Vrwm=12V, 18.1A, 400W (1ms)	DO-214AC	1d	1a	Pjt
ID	-	SK310A	Si-diode	SBR, 100V, 3A, Vf<0.85V(3A)	DO-214AC	1d	2j	Fag
IDD	-	3.0SMCJ5.0C	TVS	Vbr=6.4..7.55V, Vrwm=5.0V, 312.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDD	-	SMDJ5.0C	TVS	Vrwm=5.0V, Vbr=6.40..7.55V, Ipp=312.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDD	-	SMLJ5.0C	TVS	Vrwm=5.0V, Vbr=6.40..7.30V, Ipp=312.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IDD	-	TV30C5V0KB-G	TVS	Vrwm=5.0V, Vbr=6.40..7.30V, Ipp=312.50A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDE	-	3.0SMCJ5.0CA	TVS	Vbr=6.4..7.25V, Vrwm=5.0V, 326A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDE	-	CD214L-T5.0ALF	TVS	Vbr=6.40..7.82V, Vrwm=5V, Irsm=326.0A, 3000W(1ms)	DO-214AB	1d	1a	Brn
IDE	-	CD214L-T5.0CALF	TVS	Vbr=6.40..7.82V, Vrwm=5V, Irsm=326.0A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IDE	-	SMDJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, Ipp=326.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDE	-	SMLJ5.0A	TVS	Vbr=6.40..7.82V, Vrwm=5V, Irsm=326.0A, 3000W(1ms)	DO-214AB	1d	1a	Brn
IDE	-	SMLJ5.0CA	TVS	Vbr=6.40..7.82V, Vrwm=5V, Irsm=326.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IDE	-	TV30C5V0JB-G	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=326.09A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDF	-	3.0SMCJ6.0C	TVS	Vbr=6.67..8.45V, Vrwm=6.0V, 263.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDF	-	SMDJ6.0C	TVS	Vrwm=6.0V, Vbr=6.67..8.45V, Ipp=263.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDF	-	SMLJ6.0C	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, Ipp=263.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IDF	-	TV30C6V0KB-G	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, Ipp=263.16A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDG	-	3.0SMCJ6.0CA	TVS	Vbr=6.67..7.67V, Vrwm=6.0V, 291.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
IDG	-	CD214L-T6.0ALF	TVS	Vbr=6.67..8.15V, Vrwm=6V, Irsm=291.3A, 3000W(1ms)	DO-214AB	1d	1a	Brn
IDG	-	CD214L-T6.0CALF	TVS	Vbr=6.67..8.15V, Vrwm=6V, Irsm=291.3A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IDG	-	SMDJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, Ipp=291.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDG	-	SMLJ6.0A	TVS	Vbr=6.67..8.15V, Vrwm=6V, Irsm=291.3A, 3000W(1ms)	DO-214AB	1d	1a	Brn
IDG	-	SMLJ6.0CA	TVS	Vbr=6.67..8.15V, Vrwm=6V, Irsm=291.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IDG	-	TV30C6V0JB-G	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=291.26A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDH	-	3.0SMCJ6.5C	TVS	Vbr=7.22..9.14V, Vrwm=6.5V, 243.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDH	-	SMDJ6.5C	TVS	Vrwm=6.5V, Vbr=7.22..9.14V, Ipp=243.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDH	-	SMLJ6.5C	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, Ipp=243.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IDH	-	TV30C6V5KB-G	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, Ipp=243.90A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDK	-	3.0SMCJ6.5CA	TVS	Vbr=7.22..8.30V, Vrwm=6.5V, 267.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDK	-	CD214L-T6.5ALF	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, Irsm=267.9A, 3000W(1ms)	DO-214AB	1d	1a	Brn
IDK	-	CD214L-T6.5CALF	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, Irsm=267.9A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IDK	-	SMDJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, Ipp=267.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDK	-	SMLJ6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, Irsm=267.9A, 3000W(1ms)	DO-214AB	1d	1a	Brn
IDK	-	SMLJ6.5CA	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, Irsm=267.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IDK	-	TV30C6V5JB-G	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=267.86A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDL	-	3.0SMCJ7.0C	TVS	Vbr=7.78..9.86V, Vrwm=7.0V, 225.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDL	-	SMDJ7.0C	TVS	Vrwm=7.0V, Vbr=7.78..9.86V, Ipp=225.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDL	-	SMLJ7.0C	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=225.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IDL	-	TV30C7V0KB-G	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=225.56A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDM	-	3.0SMCJ7.0CA	TVS	Vbr=7.78..8.95V, Vrwm=7.0V, 250A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDM	-	CD214L-T7.0ALF	TVS	Vbr=7.78..8.60V, Vrwm=7V, Irsm=250.0A, 3000W(1ms)	DO-214AB	1d	1a	Brn
IDM	-	CD214L-T7.0CALF	TVS	Vbr=7.78..8.60V, Vrwm=7V, Irsm=250.0A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IDM	-	SMDJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, Ipp=250.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDM	-	SMLJ7.0A	TVS	Vbr=7.78..8.60V, Vrwm=7V, Irsm=250.0A, 3000W(1ms)	DO-214AB	1d	1a	Brn
IDM	-	SMLJ7.0CA	TVS	Vbr=7.78..8.60V, Vrwm=7V, Irsm=250.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IDM	-	TV30C7V0JB-G	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=250.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDN	-	3.0SMCJ7.5C	TVS	Vbr=8.33..10.67V, Vrwm=7.5V, 209.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDN	-	SMDJ7.5C	TVS	Vrwm=7.5V, Vbr=8.33..10.67V, Ipp=209.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDN	-	SMLJ7.5C	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, Ipp=209.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IDN	-	TV30C7V5KB-G	TVS	Vrwm=7.5V, Vbr=8.33..10.20V, Ipp=209.79A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDP	-	3.0SMCJ7.5CA	TVS	Vbr=8.33..9.58V, Vrwm=7.5V, 232.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDP	-	CD214L-T7.5CALF	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, Irsm=232.6A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IDP	-	SMDJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, Ipp=232.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDP	-	SMLJ7.5CA	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, Irsm=232.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IDP	-	TV30C7V5JB-G	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=232.56A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDQ	-	3.0SMCJ8.0C	TVS	Vbr=8.89..11.30V, Vrwm=8.0V, 200A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDQ	-	SMDJ8.0C	TVS	Vrwm=8.0V, Vbr=8.89..11.3V, Ipp=200.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDQ	-	SMLJ8.0C	TVS	Vrwm=8.0V, Vbr=8.89..10.9V, Ipp=200.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IDQ	-	TV30C8V0KB-G	TVS	Vrwm=8.0V, Vbr=8.89..10.90V, Ipp=200.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDR	-	3.0SMCJ8.0CA	TVS	Vbr=8.89..10.23V, Vrwm=8.0V, 220.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDR	-	CD214L-T8.0CALF	TVS	Vbr=8.89..9.83V, Vrwm=8V, Irsm=220.6A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IDR	-	SMDJ8.0CA	TVS	Vrwm=8.0V, Vbr=8.89 ..10.23V, Ipp=220.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDR	-	SMLJ8.0CA	TVS	Vbr=8.89..9.83V, Vrwm=8V, Irsm=220.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IDR	-	TV30C8V0JB-G	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=220.59A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDS	-	3.0SMCJ8.5C	TVS	Vbr=9.44..11.92V, Vrwm=8.5V, 188.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDS	-	SMDJ8.5C	TVS	Vrwm=8.5V, Vbr=9.44..11.92V, Ipp=188.7A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDS	-	SMLJ8.5C	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, Ipp=188.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IDS	-	TV30C8V5KB-G	TVS	Vrwm=8.5V, Vbr=9.44..11.50V, Ipp=188.68A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDT	-	3.0SMCJ8.5CA	TVS	Vbr=9.44..10.82V, Vrwm=8.5V, 208.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDT	-	CD214L-T8.5CALF	TVS	Vbr=9.44..10.43V, Vrwm=8.5V, Irsm=208.4A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IDT	-	SMDJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, Ipp=208.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDT	-	SMLJ8.5CA	TVS	Vbr=9.44..10.43V, Vrwm=8.5V, Irsm=208.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IDT	-	TV30C8V5JB-G	TVS	Vrwm=8.5V, Vbr=9.44..10.40V, Ipp=208.33A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDU	-	3.0SMCJ9.0C	TVS	Vbr=10.0..12.6V, Vrwm=9.0V, 177.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDU	-	SMDJ9.0C	TVS	Vrwm=9.0V, Vbr=10.0..12.6V, Ipp=177.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDU	-	SMLJ9.0C	TVS	Vrwm=9.0V, Vbr=10.0..12.2V, Ipp=177.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IDU	-	TV30C9V0KB-G	TVS	Vrwm=9.0V, Vbr=10.0..12.20V, Ipp=177.51A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDV	-	3.0SMCJ9.0CA	TVS	Vbr=10.0..11.5V, Vrwm=9.0V, 194.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDV	-	CD214L-T9.0CALF	TVS	Vbr=10.0..11.05V, Vrwm=9V, Irsm=194.8A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IDV	-	SMDJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, Ipp=194.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDV	-	SMLJ9.0CA	TVS	Vbr=10.0..11.05V, Vrwm=9V, Irsm=194.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IDV	-	TV30C9V0JB-G	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=194.81A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDW	-	3.0SMCJ10C	TVS	Vbr=11.1..14.1V, Vrwm=10V, 159.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDW	-	SMDJ10C	TVS	Vrwm=10V, Vbr=11.1..14.1V, Ipp=159.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDW	-	SMLJ10C	TVS	Vrwm=10V, Vbr=11.1..13.6V, Ipp=159.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IDW	-	TV30C100KB-G	TVS	Vrwm=10.0V, Vbr=11.10..13.60V, Ipp=159.57A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDX	-	3.0SMCJ10CA	TVS	Vbr=11.1..12.8V, Vrwm=10V, 176.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDX	-	CD214L-T10CALF	TVS	Vbr=11.10..12.27V, Vrwm=10V, Irsm=176.4A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
IDX	-	SMDJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.8V, Ipp=176.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDX	-	SMLJ10CA	TVS	Vbr=11.10..12.27V, Vrwm=10V, Irsm=176.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IDX	-	TV30C100JB-G	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=176.47A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDY	-	3.0SMCJ11C	TVS	Vbr=12.2..15.4V, Vrwm=11V, 149.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDY	-	SMDJ11C	TVS	Vrwm=11V, Vbr=12.2..15.4V, Ipp=149.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDY	-	SMLJ11C	TVS	Vrwm=11V, Vbr=12.2..14.9V, Ipp=149.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IDY	-	TV30C110KB-G	TVS	Vrwm=11.0V, Vbr=12.20..14.90V, Ipp=149.25A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IDZ	-	3.0SMCJ11CA	TVS	Vbr=12.2..14.0V, Vrwm=11V, 184.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IDZ	-	CD214L-T11CALF	TVS	Vbr=12.20..13.50V, Vrwm=11V, Irsm=164.8A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IDZ	-	SMDJ11CA	TVS	Vrwm=11V, Vbr=12.2..14.0V, Ipp=164.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IDZ	-	SMLJ11CA	TVS	Vbr=12.20..13.50V, Vrwm=11V, Irsm=164.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IDZ	-	TV30C110JB-G	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=164.84A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IE	-	CD214A-T12A	TVS	Vrwm=12V, Irsm=20.1A, 400W(1ms)	DO-214AC	1d	1a	Brn
IE	-	P4SMAJ12A	TVS	Vrwm=12V, 20.1A, 400W (1ms)	DO-214AC	1d	1a	Pjt
IE	-	SK315A	Si-diode	SBR, 150V, 3A, Vf<0.95V(3A)	DO-214AC	1d	2j	Fag
IE	-	SMAJ12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, 20.1A, 400W(1ms)	DO-214AC	1d	1m	Di
IE	-	SMF12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=10.1A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
IEA	-	TV30C190KB-G	TVS	Vrwm=19.0V, Vbr=21.13..25.76V, Ipp=88.21A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEB	-	TV30C190JB-G	TVS	Vrwm=19.0V, Vbr=21.10..23.30V, Ipp=97.47A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IED	-	3.0SMCJ12C	TVS	Vbr=13.3..16.9V, Vrwm=12V, 136.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IED	-	SMDJ12C	TVS	Vrwm=12V, Vbr=13.3..16.9V, Ipp=136.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IED	-	SMLJ12C	TVS	Vrwm=12V, Vbr=13.3..16.3V, Ipp=136.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IED	-	TV30C120KB-G	TVS	Vrwm=12V, Vbr=13.30..16.30V, Ipp=136.36A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEE	-	3.0SMCJ12CA	TVS	Vbr=13.3..15.3V, Vrwm=12V, 150.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IEE	-	CD214L-T12CALF	TVS	Vbr=13.30..14.70V, Vrwm=12V, Irsm=150.6A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IEE	-	SMDJ12CA	TVS	Vrwm=12V, Vbr=13.3..15.3V, Ipp=150.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IEE	-	SMLJ12CA	TVS	Vbr=13.30..14.70V, Vrwm=12V, Irsm=150.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IEE	-	TV30C120JB-G	TVS	Vrwm=12V, Vbr=13.30..14.70V, Ipp=150.75A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEF	-	3.0SMCJ13C	TVS	Vbr=14.4..18.2V, Vrwm=13V, 126.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IEF	-	SMDJ13C	TVS	Vrwm=13V, Vbr=14.4..18.2V, Ipp=126.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IEF	-	SMLJ13C	TVS	Vrwm=13V, Vbr=14.4..17.6V, Ipp=126.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IEF	-	TV30C130KB-G	TVS	Vrwm=13.0V, Vbr=14.40..17.60V, Ipp=126.05A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEG	-	3.0SMCJ13CA	TVS	Vbr=14.4..16.5V, Vrwm=13V, 139.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IEG	-	CD214L-T13CALF	TVS	Vbr=14.40..15.90V, Vrwm=13V, Irsm=139.4A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IEG	-	SMDJ13CA	TVS	Vrwm=13V, Vbr=14.4..16.5V, Ipp=139.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IEG	-	SMLJ13CA	TVS	Vbr=14.40..15.90V, Vrwm=13V, Irsm=139.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IEG	-	TV30C130JB-G	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=139.53A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEH	-	3.0SMCJ14C	TVS	Vbr=15.6..19.8V, Vrwm=14V, 116.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IEH	-	SMDJ14C	TVS	Vrwm=14V, Vbr=15.6..19.8V, Ipp=116.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IEH	-	SMLJ14C	TVS	Vrwm=14V, Vbr=15.6..19.1V, Ipp=116.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IEH	-	TV30C140KB-G	TVS	Vrwm=14.0V, Vbr=15.60..19.10V, Ipp=116.28A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEK	-	3.0SMCJ14CA	TVS	Vbr=15.6..17.9V, Vrwm=14V, 129.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IEK	-	CD214L-T14CALF	TVS	Vbr=15.60..17.20V, Vrwm=14V, Irsm=129.4A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IEK	-	SMDJ14CA	TVS	Vrwm=14V, Vbr=15.6..17.9V, Ipp=129.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IEK	-	SMLJ14CA	TVS	Vbr=15.60..17.20V, Vrwm=14V, Irsm=129.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IEK	-	TV30C140JB-G	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=129.31A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEL	-	3.0SMCJ15C	TVS	Vbr=16.7..21.1V, Vrwm=15V, 111.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IEL	-	SMDJ15C	TVS	Vrwm=15V, Vbr=16.7..21.1V, Ipp=111.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IEL	-	SMLJ15C	TVS	Vrwm=15V, Vbr=16.7..20.4V, Ipp=111.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IEL	-	TV30C150KB-G	TVS	Vrwm=15.0V, Vbr=16.70..20.40V, Ipp=111.52A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEM	-	3.0SMCJ15CA	TVS	Vbr=16.7..19.2V, Vrwm=15V, 123.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IEM	-	CD214L-T15CALF	TVS	Vbr=16.70..18.50V, Vrwm=15V, Irsm=123.0A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IEM	-	SMDJ15CA	TVS	Vrwm=15V, Vbr=16.7..19.2V, Ipp=123.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IEM	-	SMLJ15CA	TVS	Vbr=16.70..18.50V, Vrwm=15V, Irsm=123.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IEM	-	TV30C150JB-G	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=122.95A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEN	-	3.0SMCJ16C	TVS	Vbr=17.8..22.6V, Vrwm=16V, 104.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IEN	-	SMDJ16C	TVS	Vrwm=16V, Vbr=17.8..22.6V, Ipp=104.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IEN	-	SMLJ16C	TVS	Vrwm=16V, Vbr=17.8..21.8V, Ipp=104.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IEN	-	TV30C160KB-G	TVS	Vrwm=16.0V, Vbr=17.80..21.80V, Ipp=104.17A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEP	-	3.0SMCJ16CA	TVS	Vbr=17.8..20.5V, Vrwm=16V, 115.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IEP	-	CD214L-T16CALF	TVS	Vbr=17.80..19.70V, Vrwm=16V, Irsm=115.4A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IEP	-	SMDJ16CA	TVS	Vrwm=16V, Vbr=17.8..20.5V, Ipp=115.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IEP	-	SMLJ16CA	TVS	Vbr=17.80..19.70V, Vrwm=16V, Irsm=115.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IEP	-	TV30C160JB-G	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=115.38A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEQ	-	3.0SMCJ17C	TVS	Vbr=18.9..23.9V, Vrwm=17V, 98.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IEQ	-	SMDJ17C	TVS	Vrwm=17V, Vbr=18.9..23.9V, Ipp=98.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IEQ	-	SMLJ17C	TVS	Vrwm=17V, Vbr=18.9..23.1V, Ipp=98.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IEQ	-	TV30C170KB-G	TVS	Vrwm=17.0V, Vbr=18.90..23.10V, Ipp=98.36A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IER	-	3.0SMCJ17CA	TVS	Vbr=18.9..21.7V, Vrwm=17V, 106.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IER	-	CD214L-T17CALF	TVS	Vbr=18.90..20.90V, Vrwm=17V, Irsm=106.6A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
IER	-	SMDJ17CA	TVS	Vrwm=17V, Vbr=18.9..21.7V, Ipp=108.7A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IER	-	SMLJ17CA	TVS	Vbr=18.90..20.90V, Vrwm=17V, Irsm=106.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IER	-	TV30C170JB-G	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=108.70A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IES	-	3.0SMCJ18C	TVS	Vbr=20.0..25.3V, Vrwm=18V, 93.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IES	-	SMDJ18C	TVS	Vrwm=18V, Vbr=20.0..25.3V, Ipp=93.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IES	-	SMLJ18C	TVS	Vrwm=18V, Vbr=20.0..24.4V, Ipp=93.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IES	-	TV30C180KB-G	TVS	Vrwm=18.0V, Vbr=20.0..24.40V, Ipp=93.17A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IET	-	3.0SMCJ18CA	TVS	Vbr=20.0..23.3V, Vrwm=18V, 102.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IET	-	CD214L-T18CALF	TVS	Vbr=20.0..22.10V, Vrwm=18V, Irsm=102.8A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IET	-	SMDJ18CA	TVS	Vrwm=18V, Vbr=20.0..23.3V, Ipp=102.7A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IET	-	SMLJ18CA	TVS	Vbr=20.0..22.10V, Vrwm=18V, Irsm=102.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IET	-	TV30C180JB-G	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=102.74A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEU	-	3.0SMCJ20C	TVS	Vbr=22.2..28.1V, Vrwm=20V, 83.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IEU	-	SMDJ20C	TVS	Vrwm=20V, Vbr=22.2..28.1V, Ipp=83.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IEU	-	SMLJ20C	TVS	Vrwm=20V, Vbr=22.2..27.1V, Ipp=83.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IEU	-	TV30C200KB-G	TVS	Vrwm=20.0V, Vbr=21.13..27.10V, Ipp=83.80A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEV	-	3.0SMCJ20CA	TVS	Vbr=22.2..25.5V, Vrwm=20V, 92.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IEV	-	CD214L-T20CALF	TVS	Vbr=22.20..24.50V, Vrwm=20V, Irsm=92.6A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IEV	-	SMDJ20CA	TVS	Vrwm=20V, Vbr=22.2..25.5V, Ipp=92.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IEV	-	SMLJ20CA	TVS	Vbr=22.20..24.50V, Vrwm=20V, Irsm=92.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IEV	-	TV30C200JB-G	TVS	Vrwm=20.0V, Vbr=21.10..24.50V, Ipp=92.59A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEW	-	3.0SMCJ22C	TVS	Vbr=24.4..30.9V, Vrwm=22V, 76.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IEW	-	SMDJ22C	TVS	Vrwm=22V, Vbr=24.4..30.9V, Ipp=76.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IEW	-	SMLJ22C	TVS	Vrwm=22V, Vbr=24.4..29.8V, Ipp=76.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IEW	-	TV30C220KB-G	TVS	Vrwm=22.0V, Vbr=24.40..29.80V, Ipp=76.14A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEX	-	3.0SMCJ22CA	TVS	Vbr=24.4..28.0V, Vrwm=22V, 84.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IEX	-	CD214L-T22CALF	TVS	Vbr=24.40..27.0V, Vrwm=22V, Irsm=84.4A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IEX	-	SMDJ22CA	TVS	Vrwm=22V, Vbr=24.4..28.0V, Ipp=84.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IEX	-	SMLJ22CA	TVS	Vbr=24.40..27.0V, Vrwm=22V, Irsm=84.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IEX	-	TV30C220JB-G	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=84.51A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEY	-	3.0SMCJ24C	TVS	Vbr=26.7..33.8V, Vrwm=24V, 69.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IEY	-	SMDJ24C	TVS	Vrwm=24V, Vbr=26.7..33.8V, Ipp=69.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IEY	-	SMLJ24C	TVS	Vrwm=24V, Vbr=26.7..32.6V, Ipp=69.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IEY	-	TV30C240KB-G	TVS	Vrwm=24.0V, Vbr=26.70..32.60V, Ipp=69.77A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IEZ	-	3.0SMCJ24CA	TVS	Vbr=26.7..30.7V, Vrwm=24V, 77.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IEZ	-	CD214L-T24CALF	TVS	Vbr=26.70..29.50V, Vrwm=24V, Irsm=77.2A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IEZ	-	SMDJ24CA	TVS	Vrwm=24V, Vbr=26.7..30.7V, Ipp=77.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IEZ	-	SMLJ24CA	TVS	Vbr=26.70..29.50V, Vrwm=24V, Irsm=77.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IEZ	-	TV30C240JB-G	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=77.12A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IF	-	P4SMAJ13	TVS	Vrwm=13V, 16.8A, 400W (1ms)	DO-214AC	1d	1a	Pjt
IF	-	SK32B	Si-diode	SBR, 20V, 3A, Vf<0.5V(3A)	DO-214AA	1d	2j	Fag
IFD	-	3.0SMCJ26C	TVS	Vbr=28.9..36.6V, Vrwm=26V, 64.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFD	-	SMDJ26C	TVS	Vrwm=26V, Vbr=28.9..36.6V, Ipp=64.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFD	-	SMLJ26C	TVS	Vrwm=26V, Vbr=28.9..35.3V, Ipp=64.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IFD	-	TV30C260KB-G	TVS	Vrwm=26.0V, Vbr=28.90..35.30V, Ipp=64.38A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFE	-	3.0SMCJ26CA	TVS	Vbr=28.9..33.2V, Vrwm=26V, 71.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFE	-	CD214L-T26CALF	TVS	Vbr=28.90..31.90V, Vrwm=26V, Irsm=71.2A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IFE	-	SMDJ26CA	TVS	Vrwm=26V, Vbr=28.9..33.2V, Ipp=71.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFE	-	SMLJ26CA	TVS	Vbr=28.90..31.90V, Vrwm=26V, Irsm=71.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IFE	-	TV30C260JB-G	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=71.26A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFF	-	3.0SMCJ28C	TVS	Vbr=31.1..39.4V, Vrwm=28V, 60.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFF	-	SMDJ28C	TVS	Vrwm=28V, Vbr=31.1..39.4V, Ipp=60.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFF	-	SMLJ28C	TVS	Vrwm=28V, Vbr=31.1..38.0V, Ipp=60.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IFF	-	TV30C280KB-G	TVS	Vrwm=28.0V, Vbr=31.10..38.0V, Ipp=60.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFG	-	3.0SMCJ28CA	TVS	Vbr=31.1..35.8V, Vrwm=28V, 66.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFG	-	CD214L-T28CALF	TVS	Vbr=31.10..34.40V, Vrwm=28V, Irsm=66.0A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IFG	-	SMDJ28CA	TVS	Vrwm=28V, Vbr=31.1..35.8V, Ipp=66.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFG	-	SMLJ28CA	TVS	Vbr=31.10..34.40V, Vrwm=28V, Irsm=66.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IFG	-	TV30C280JB-G	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=66.08A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFH	-	3.0SMCJ30C	TVS	Vbr=33.3..42.2V, Vrwm=30V, 56.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFH	-	SMDJ30C	TVS	Vrwm=30V, Vbr=33.3..42.2V, Ipp=56.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFH	-	SMLJ30C	TVS	Vrwm=30V, Vbr=33.3..40.7V, Ipp=56.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IFH	-	TV30C300KB-G	TVS	Vrwm=30.0V, Vbr=33.30..40.70V, Ipp=56.07A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFK	-	3.0SMCJ30CA	TVS	Vbr=33.3..38.3V, Vrwm=30V, 62.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFK	-	CD214L-T30CALF	TVS	Vbr=33.30..36.80V, Vrwm=30V, Irsm=62.0A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IFK	-	SMDJ30CA	TVS	Vrwm=30V, Vbr=33.3..38.3V, Ipp=62.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFK	-	SMLJ30CA	TVS	Vbr=33.30..36.80V, Vrwm=30V, Irsm=62.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IFK	-	TV30C300JB-G	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=61.98A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFL	-	3.0SMCJ33C	TVS	Vbr=36.7..46.5V, Vrwm=33V, 50.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFL	-	SMDJ33C	TVS	Vrwm=33V, Vbr=36.7..46.5V, Ipp=50.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
IFL	-	SMLJ33C	TVS	Vrwm=33V, Vbr=36.7..44.9V, Ipp=50.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IFL	-	TV30C330KB-G	TVS	Vrwm=33.0V, Vbr=36.70..44.90V, Ipp=50.85A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFM	-	3.0SMCJ33CA	TVS	Vbr=36.7..42.2V, Vrwm=33V, 56.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFM	-	CD214L-T33CALF	TVS	Vbr=36.70..40.60V, Vrwm=33V, Irsm=56.2A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IFM	-	SMDJ33CA	TVS	Vrwm=33V, Vbr=36.7..42.2V, Ipp=56.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFM	-	SMLJ33CA	TVS	Vbr=36.70..40.60V, Vrwm=33V, Irsm=56.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IFM	-	TV30C330JB-G	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=56.29A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFN	-	3.0SMCJ36C	TVS	Vbr=40.0..50.7V, Vrwm=36V, 46.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFN	-	SMDJ36C	TVS	Vrwm=36V, Vbr=40.0..50.7V, Ipp=46.7A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFN	-	SMLJ36C	TVS	Vrwm=36V, Vbr=40.0..48.9V, Ipp=46.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IFN	-	TV30C360KB-G	TVS	Vrwm=36.0V, Vbr=40.0..48.90V, Ipp=46.66A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFP	-	3.0SMCJ36CA	TVS	Vbr=40.0..46.0V, Vrwm=36V, 51.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFP	-	CD214L-T36CALF	TVS	Vbr=40.0..44.20V, Vrwm=36V, Irsm=51.6A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IFP	-	SMDJ36CA	TVS	Vrwm=36V, Vbr=40.0..46.0V, Ipp=51.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFP	-	SMLJ36CA	TVS	Vbr=40.0..44.20V, Vrwm=36V, Irsm=51.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IFP	-	TV30C360JB-G	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=51.64A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFQ	-	3.0SMCJ40C	TVS	Vbr=44.4..56.3V, Vrwm=40V, 42.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFQ	-	SMDJ40C	TVS	Vrwm=40V, Vbr=44.4..56.3V, Ipp=42.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFQ	-	SMLJ40C	TVS	Vrwm=40V, Vbr=44.4..54.3V, Ipp=42.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IFQ	-	TV30C400KB-G	TVS	Vrwm=40.0V, Vbr=44.40..54.30V, Ipp=42.02A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFR	-	3.0SMCJ40CA	TVS	Vbr=44.4..51.1V, Vrwm=40V, 46.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFR	-	CD214L-T40CALF	TVS	Vbr=44.40..49.10V, Vrwm=40V, Irsm=46.4A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IFR	-	SMDJ40CA	TVS	Vrwm=40V, Vbr=44.4..51.1V, Ipp=46.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFR	-	SMLJ40CA	TVS	Vbr=44.40..49.10V, Vrwm=40V, Irsm=46.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IFR	-	TV30C400JB-G	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=46.51A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFS	-	3.0SMCJ43C	TVS	Vbr=47.8..60.5V, Vrwm=43V, 39.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFS	-	SMDJ43C	TVS	Vrwm=43V, Vbr=47.8..60.5V, Ipp=39.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFS	-	SMLJ43C	TVS	Vrwm=43V, Vbr=47.8..58.4V, Ipp=39.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IFS	-	TV30C430KB-G	TVS	Vrwm=43.0V, Vbr=47.80..58.40V, Ipp=39.11A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFT	-	3.0SMCJ43CA	TVS	Vbr=47.8..54.9V, Vrwm=43V, 43.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFT	-	CD214L-T43CALF	TVS	Vbr=47.80..52.80V, Vrwm=43V, Irsm=43.2A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IFT	-	SMDJ43CA	TVS	Vrwm=43V, Vbr=47.8..54.9V, Ipp=43.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFT	-	SMLJ43CA	TVS	Vbr=47.80..52.80V, Vrwm=43V, Irsm=43.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IFT	-	TV30C430JB-G	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=43.23A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFU	-	3.0SMCJ45C	TVS	Vbr=50.0..63.3V, Vrwm=45V, 37.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFU	-	SMDJ45C	TVS	Vrwm=45V, Vbr=50.0..63.3V, Ipp=37.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFU	-	SMLJ45C	TVS	Vrwm=45V, Vbr=50.0..61.1V, Ipp=37.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IFU	-	TV30C450KB-G	TVS	Vrwm=45.0V, Vbr=50.0..61.10V, Ipp=37.36A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFV	-	3.0SMCJ45CA	TVS	Vbr=50.0..57.5V, Vrwm=45V, 41.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFV	-	CD214L-T45CALF	TVS	Vbr=50.0..55.30V, Vrwm=45V, Irsm=41.2A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IFV	-	SMDJ45CA	TVS	Vrwm=45V, Vbr=50.0..57.5V, Ipp=41.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFV	-	SMLJ45CA	TVS	Vbr=50.0..55.30V, Vrwm=45V, Irsm=41.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IFV	-	TV30C450JB-G	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=41.27A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFW	-	3.0SMCJ48C	TVS	Vbr=53.3..67.5V, Vrwm=48V, 35.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFW	-	SMDJ48C	TVS	Vrwm=48V, Vbr=53.3..67.5V, Ipp=35.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFW	-	SMLJ48C	TVS	Vrwm=48V, Vbr=53.3..65.1V, Ipp=35.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IFW	-	TV30C480KB-G	TVS	Vrwm=48.0V, Vbr=53.30..65.10V, Ipp=35.09A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFX	-	3.0SMCJ48CA	TVS	Vbr=53.3..61.3V, Vrwm=48V, 38.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFX	-	CD214L-T48CALF	TVS	Vbr=53.30..58.90V, Vrwm=48V, Irsm=38.8A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IFX	-	SMDJ48CA	TVS	Vrwm=48V, Vbr=53.3..61.3V, Ipp=38.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFX	-	SMLJ48CA	TVS	Vbr=53.30..58.90V, Vrwm=48V, Irsm=38.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IFX	-	TV30C480JB-G	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=38.76A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFY	-	3.0SMCJ51C	TVS	Vbr=56.7..71.8V, Vrwm=51V, 37.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFY	-	SMDJ51C	TVS	Vrwm=51V, Vbr=56.7..71.8V, Ipp=32.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFY	-	SMLJ51C	TVS	Vrwm=51V, Vbr=56.7..69.3V, Ipp=37.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IFY	-	TV30C510KB-G	TVS	Vrwm=51.0V, Vbr=56.70..69.30V, Ipp=32.93A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IFZ	-	3.0SMCJ51CA	TVS	Vbr=56.7..65.2V, Vrwm=51V, 36.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IFZ	-	CD214L-T51CALF	TVS	Vbr=56.70..62.70V, Vrwm=51V, Irsm=36.4A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IFZ	-	SMDJ51CA	TVS	Vrwm=51V, Vbr=56.7..65.2V, Ipp=36.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IFZ	-	SMLJ51CA	TVS	Vbr=56.70..62.70V, Vrwm=51V, Irsm=36.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IFZ	-	TV30C510JB-G	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=36.41A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IG	-	CD214A-T13A	TVS	Vrwm=13V, Irsm=18.6A, 400W(1ms)	DO-214AC	1d	1a	Brn
IG	-	P4SMAJ13A	TVS	Vrwm=13V, 18.6A, 400W (1ms)	DO-214AC	1d	1a	Pjt
IG	-	SK34B	Si-diode	SBR, 40V, 3A, Vf<0.5V(3A)	DO-214AA	1d	2j	Fag
IG	-	SMAJ13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, 18.6A, 400W(1ms)	DO-214AC	1d	1m	Di
IG	-	SMF13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, Ipp=9.3A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
IGA	-	TV30C800KB-G	TVS	Vrwm=80.0V, Vbr=88.96..108.80V, Ipp=20.95A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGB	-	TV30C800JB-G	TVS	Vrwm=80.0V, Vbr=88.80..97.60V, Ipp=23.15A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGD	-	3.0SMCJ54C	TVS	Vbr=60.0..76.0V, Vrwm=54V, 31.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGD	-	SMDJ54C	TVS	Vrwm=54V, Vbr=60.0..76.0V, Ipp=31.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
IGD	-	SMLJ54C	TVS	Vrwm=54V, Vbr=60.0..73.3V, Ipp=31.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IGD	-	TV30C540KB-G	TVS	Vrwm=54.0V, Vbr=60.0..73.30V, Ipp=31.15A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGE	-	3.0SMCJ54CA	TVS	Vbr=60.0..69.0V, Vrwm=54V, 34.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGE	-	CD214L-T54CALF	TVS	Vbr=60.0..66.30V, Vrwm=54V, Irsm=34.4A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IGE	-	SMDJ54CA	TVS	Vrwm=54V, Vbr=60.0..69.0V, Ipp=34.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGE	-	SMLJ54CA	TVS	Vbr=60.0..66.30V, Vrwm=54V, Irsm=34.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IGE	-	TV30C540JB-G	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=34.44A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGF	-	3.0SMCJ58C	TVS	Vbr=64.4..81.6V, Vrwm=58V, 39.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGF	-	SMDJ58C	TVS	Vrwm=58V, Vbr=64.4..81.6V, Ipp=29.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGF	-	SMLJ58C	TVS	Vrwm=58V, Vbr=64.4..78.7V, Ipp=39.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IGF	-	TV30C580KB-G	TVS	Vrwm=58.0V, Vbr=64.40..78.70V, Ipp=29.13A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGG	-	3.0SMCJ58CA	TVS	Vbr=64.4..74.1V, Vrwm=58V, 32.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGG	-	CD214L-T58CALF	TVS	Vbr=64.40..71.20V, Vrwm=58V, Irsm=32.0A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IGG	-	SMDJ58CA	TVS	Vrwm=58V, Vbr=64.4..74.1V, Ipp=32.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGG	-	SMLJ58CA	TVS	Vbr=64.40..71.20V, Vrwm=58V, Irsm=32.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IGG	-	TV30C580JB-G	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=32.05A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGH	-	3.0SMCJ60C	TVS	Vbr=66.7..84.5V, Vrwm=60V, 28.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGH	-	SMDJ60C	TVS	Vrwm=60V, Vbr=66.7..84.5V, Ipp=28.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGH	-	SMLJ60C	TVS	Vrwm=60V, Vbr=66.7..81.5V, Ipp=28.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IGH	-	TV30C600KB-G	TVS	Vrwm=60.0V, Vbr=66.70..81.50V, Ipp=28.04A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGK	-	3.0SMCJ60CA	TVS	Vbr=66.7..76.7V, Vrwm=60V, 31.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGK	-	CD214L-T60CALF	TVS	Vbr=66.70..73.70V, Vrwm=60V, Irsm=31.0A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IGK	-	SMDJ60CA	TVS	Vrwm=60V, Vbr=66.7..76.7V, Ipp=31.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGK	-	SMLJ60CA	TVS	Vbr=66.70..73.70V, Vrwm=60V, Irsm=31.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IGK	-	TV30C600JB-G	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=30.99A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGL	-	3.0SMCJ64C	TVS	Vbr=71.1..90.1V, Vrwm=64V, 26.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGL	-	SMDJ64C	TVS	Vrwm=64V, Vbr=71.1..90.1V, Ipp=26.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGL	-	SMLJ64C	TVS	Vrwm=64V, Vbr=71.1..86.9V, Ipp=26.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IGL	-	TV30C640KB-G	TVS	Vrwm=64.0V, Vbr=71.10..86.90V, Ipp=26.32A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGM	-	3.0SMCJ64CA	TVS	Vbr=71.1..81.8V, Vrwm=64V, 29.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGM	-	CD214L-T64CALF	TVS	Vbr=71.10..78.60V, Vrwm=64V, Irsm=29.2A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IGM	-	SMDJ64CA	TVS	Vrwm=64V, Vbr=71.1..81.8V, Ipp=29.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGM	-	SMLJ64CA	TVS	Vbr=71.10..78.60V, Vrwm=64V, Irsm=29.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IGM	-	TV30C640JB-G	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=29.13A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGN	-	3.0SMCJ70C	TVS	Vbr=77.8..98.6V, Vrwm=70V, 24.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGN	-	SMDJ70C	TVS	Vrwm=70V, Vbr=77.8..98.6V, Ipp=24.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGN	-	SMLJ70C	TVS	Vrwm=70V, Vbr=77.8..95.1V, Ipp=24.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IGN	-	TV30C700KB-G	TVS	Vrwm=70.0V, Vbr=77.80..95.10V, Ipp=24.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGP	-	3.0SMCJ70CA	TVS	Vbr=77.8..89.5V, Vrwm=70V, 26.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGP	-	CD214L-T70CALF	TVS	Vbr=77.80..86.0V, Vrwm=70V, Irsm=26.6A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IGP	-	SMDJ70CA	TVS	Vrwm=70V, Vbr=77.8..89.5V, Ipp=26.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGP	-	SMLJ70CA	TVS	Vbr=77.80..86.0V, Vrwm=70V, Irsm=26.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IGP	-	TV30C700JB-G	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=26.55A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGQ	-	3.0SMCJ75C	TVS	Vbr=83.3..105.7V, Vrwm=75V, 22.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGQ	-	SMDJ75C	TVS	Vrwm=75V, Vbr=83.0..105.7V, Ipp=22.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGQ	-	SMLJ75C	TVS	Vrwm=75V, Vbr=83.3..102V, Ipp=22.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IGQ	-	TV30C750KB-G	TVS	Vrwm=75.0V, Vbr=83.30..102.0V, Ipp=22.39A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGR	-	3.0SMCJ75CA	TVS	Vbr=83.3..95.8V, Vrwm=75V, 24.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGR	-	CD214L-T75CALF	TVS	Vbr=83.30..92.10V, Vrwm=75V, Irsm=24.8A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IGR	-	SMDJ75CA	TVS	Vrwm=75V, Vbr=83.0..95.8V, Ipp=24.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGR	-	SMLJ75CA	TVS	Vbr=83.30..92.10V, Vrwm=75V, Irsm=24.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IGR	-	TV30C750JB-G	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=24.79A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGS	-	3.0SMCJ78C	TVS	Vbr=86.7..109.8V, Vrwm=78V, 21.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGS	-	SMDJ78C	TVS	Vrwm=78V, Vbr=86.0..109.8V, Ipp=21.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGS	-	SMLJ78C	TVS	Vrwm=78V, Vbr=86.7..106V, Ipp=21.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IGS	-	TV30C780KB-G	TVS	Vrwm=78.0V, Vbr=86.70..106.0V, Ipp=21.58A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGT	-	3.0SMCJ78CA	TVS	Vbr=86.7..99.7V, Vrwm=78V, 22.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGT	-	CD214L-T78CALF	TVS	Vbr=86.70..95.80V, Vrwm=78V, Irsm=22.8A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IGT	-	SMDJ78CA	TVS	Vrwm=78V, Vbr=86.0..99.7V, Ipp=23.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGT	-	SMLJ78CA	TVS	Vbr=86.70..95.80V, Vrwm=78V, Irsm=22.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IGT	-	TV30C780JB-G	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=23.81A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGU	-	3.0SMCJ85C	TVS	Vbr=94.4..119.2V, Vrwm=85V, 19.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGU	-	SMDJ85C	TVS	Vrwm=85V, Vbr=94.0..119.2V, Ipp=19.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGU	-	SMLJ85C	TVS	Vrwm=85V, Vbr=94.4..115V, Ipp=19.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IGU	-	TV30C850KB-G	TVS	Vrwm=85.0V, Vbr=94.40..115.0V, Ipp=19.87A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGV	-	3.0SMCJ85CA	TVS	Vbr=94.4..108.2V, Vrwm=85V, 20.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGV	-	CD214L-T85CALF	TVS	Vbr=94.40..104.30V, Vrwm=85V, Irsm=20.8A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IGV	-	SMDJ85CA	TVS	Vrwm=85V, Vbr=94.0..108.2V, Ipp=21.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGV	-	SMLJ85CA	TVS	Vbr=94.40..104.30V, Vrwm=85V, Irsm=20.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IGV	-	TV30C850JB-G	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=21.90A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
IGW	-	3.0SMCJ90C	TVS	Vbr=100..126.5V, Vrwm=90V, 18.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGW	-	SMDJ90C	TVS	Vrwm=90V, Vbr=100..126.5V, Ipp=18.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGW	-	SMLJ90C	TVS	Vrwm=90V, Vbr=100..122V, Ipp=18.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IGW	-	TV30C900KB-G	TVS	Vrwm=90V, Vbr=100.0..122.0V, Ipp=18.75A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGX	-	3.0SMCJ90CA	TVS	Vbr=100..115.5V, Vrwm=90V, 20.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGX	-	CD214L-T90CALF	TVS	Vbr=100.0..110.50V, Vrwm=90V, Irsm=20.6A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IGX	-	SMDJ90CA	TVS	Vrwm=90V, Vbr=100..115.5V, Ipp=20.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGX	-	SMLJ90CA	TVS	Vbr=100.0..110.50V, Vrwm=90V, Irsm=20.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IGX	-	TV30C900JB-G	TVS	Vrwm=90V, Vbr=100.0..111.0V, Ipp=20.55A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGY	-	3.0SMCJ100C	TVS	Vbr=111..141.0V, Vrwm=100V, 16.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGY	-	SMDJ100C	TVS	Vrwm=100V, Vbr=111..141.0V, Ipp=16.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGY	-	SMLJ100C	TVS	Vrwm=100V, Vbr=111..136V, Ipp=16.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IGY	-	TV30C101KB-G	TVS	Vrwm=100.0V, Vbr=111.0..136.0V, Ipp=16.76A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IGZ	-	3.0SMCJ100CA	TVS	Vbr=111..128.0V, Vrwm=100V, 18.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IGZ	-	CD214L-T100CALF	TVS	Vbr=111.0..122.70V, Vrwm=100V, Irsm=18.6A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IGZ	-	SMDJ100CA	TVS	Vrwm=100V, Vbr=111..128.0V, Ipp=18.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IGZ	-	SMLJ100CA	TVS	Vbr=111.0..122.70V, Vrwm=100V, Irsm=18.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IGZ	-	TV30C101JB-G	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=18.52A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IH	-	P4SMAJ14	TVS	Vrwm=14V, 15.5A, 400W (1ms)	DO-214AC	1d	1a	Pjt
IH	-	SK36B	Si-diode	SBR, 60V, 3A, Vf<0.75V(3A)	DO-214AA	1d	2j	Fag
IHA	-	TV30C141KB-G	TVS	Vrwm=140V, Vbr=155.68..190.4V, Ipp=11.97A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHB	-	TV30C141JB-G	TVS	Vrwm=140V, Vbr=155.0..171.0V, Ipp=13.23A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHD	-	3.0SMCJ110C	TVS	Vbr=122..154.5V, Vrwm=110V, 15.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHD	-	SMDJ110C	TVS	Vrwm=110V, Vbr=122..154.5V, Ipp=15.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IHD	-	SMLJ110C	TVS	Vrwm=110V, Vbr=122..149V, Ipp=15.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IHD	-	TV30C111KB-G	TVS	Vrwm=110.0V, Vbr=122.0..149.0V, Ipp=15.31A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHE	-	3.0SMCJ110CA	TVS	Vbr=122..140.5V, Vrwm=110V, 16.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHE	-	CD214L-T110CALF	TVS	Vbr=122.0..134.80V, Vrwm=110V, Irsm=16.8A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IHE	-	SMDJ110CA	TVS	Vrwm=110V, Vbr=122..140.5V, Ipp=16.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IHE	-	SMLJ110CA	TVS	Vbr=122.0..134.80V, Vrwm=110V, Irsm=16.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IHE	-	TV30C111JB-G	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=16.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHF	-	3.0SMCJ120C	TVS	Vbr=133..169.0V, Vrwm=120V, 14.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHF	-	SMDJ120C	TVS	Vrwm=120V, Vbr=133..169.0V, Ipp=14.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IHF	-	SMLJ120C	TVS	Vrwm=120V, Vbr=133..163V, Ipp=14.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IHF	-	TV30C121KB-G	TVS	Vrwm=120.0V, Vbr=133.0..163.0V, Ipp=14.02A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHG	-	3.0SMCJ120CA	TVS	Vbr=133..153.0V, Vrwm=120V, 15.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHG	-	CD214L-T120CALF	TVS	Vbr=133.0..147.0V, Vrwm=120V, Irsm=15.6A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IHG	-	SMDJ120CA	TVS	Vrwm=120V, Vbr=133..153.0V, Ipp=15.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IHG	-	SMLJ120CA	TVS	Vbr=133.0..147.0V, Vrwm=120V, Irsm=15.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IHG	-	TV30C121JB-G	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=15.54A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHH	-	3.0SMCJ130C	TVS	Vbr=144..182.5V, Vrwm=130V, 13.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHH	-	CD214L-T130CALF	TVS	Vbr=144.0..159.20V, Vrwm=130V, Irsm=14.4A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IHH	-	SMDJ130C	TVS	Vrwm=130V, Vbr=144..182.5V, Ipp=13.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IHH	-	SMLJ130C	TVS	Vrwm=130V, Vbr=144..176V, Ipp=13.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IHH	-	SMLJ130CA	TVS	Vbr=144.0..159.20V, Vrwm=130V, Irsm=14.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IHH	-	TV30C131KB-G	TVS	Vrwm=130V, Vbr=144.0..176.0V, Ipp=12.99A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHK	-	3.0SMCJ130CA	TVS	Vbr=144..165.5V, Vrwm=130V, 14.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHK	-	SMDJ130CA	TVS	Vrwm=130V, Vbr=144..165.5V, Ipp=14.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IHK	-	SMLJ130CA	TVS	Vrwm=130V, Vbr=144..159V, Ipp=14.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IHK	-	TV30C131JB-G	TVS	Vrwm=130V, Vbr=144.0..159.0V, Ipp=14.35A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHL	-	3.0SMCJ150C	TVS	Vbr=167..211.5V, Vrwm=150V, 11.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHL	-	SMDJ150C	TVS	Vrwm=150V, Vbr=167..211.5V, Ipp=11.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IHL	-	SMLJ150C	TVS	Vrwm=150V, Vbr=167..204V, Ipp=11.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IHL	-	TV30C151KB-G	TVS	Vrwm=150.0V, Vbr=167.0..204.0V, Ipp=11.19A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHM	-	3.0SMCJ150CA	TVS	Vbr=167..192.5V, Vrwm=150V, 12.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHM	-	CD214L-T150CALF	TVS	Vbr=167.0..184.60V, Vrwm=150V, Irsm=12.4A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IHM	-	SMDJ150CA	TVS	Vrwm=150V, Vbr=167..192.5V, Ipp=12.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IHM	-	SMLJ150CA	TVS	Vbr=167.0..184.60V, Vrwm=150V, Irsm=12.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IHM	-	TV30C151JB-G	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=12.35A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHN	-	3.0SMCJ160C	TVS	Vbr=178..226.0V, Vrwm=160V, 10.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHN	-	SMDJ160C	TVS	Vrwm=160V, Vbr=178..226.0V, Ipp=10.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IHN	-	SMLJ160C	TVS	Vrwm=160V, Vbr=178..218V, Ipp=10.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IHN	-	TV30C161KB-G	TVS	Vrwm=160.0V, Vbr=178.0..218.0V, Ipp=10.45A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHP	-	3.0SMCJ160CA	TVS	Vbr=178..205.0V, Vrwm=160V, 11.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHP	-	CD214L-T160CALF	TVS	Vbr=178.0..196.70V, Vrwm=160V, Irsm=11.6A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IHP	-	SMDJ160CA	TVS	Vrwm=160V, Vbr=178..205.0V, Ipp=11.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IHP	-	SMLJ160CA	TVS	Vbr=178.0..196.70V, Vrwm=160V, Irsm=11.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IHP	-	TV30C161JB-G	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=11.58A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHQ	-	3.0SMCJ170C	TVS	Vbr=189..239.5V, Vrwm=170V, 9.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHQ	-	SMDJ170C	TVS	Vrwm=170V, Vbr=189..239.5V, Ipp=9.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
IHQ	-	SMLJ170C	TVS	Vrwm=170V, Vbr=189..231V, Ipp=9.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Mco
IHQ	-	TV30C171KB-G	TVS	Vrwm=170.0V, Vbr=189.0..231.0V, Ipp=9.87A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHR	-	3.0SMCJ170CA	TVS	Vbr=189..217.5V, Vrwm=170V, 11.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHR	-	CD214L-T170CALF	TVS	Vbr=189.0..208.90V, Vrwm=170V, Irsm=11.0A, 3000W(1ms), Bidir.	DO-214AB	1d	1j	Brn
IHR	-	SMDJ170CA	TVS	Vrwm=170V, Vbr=189..217.5V, Ipp=10.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IHR	-	SMLJ170CA	TVS	Vbr=189.0..208.90V, Vrwm=170V, Irsm=11.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Brn
IHR	-	TV30C171JB-G	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=10.91A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHS	-	3.0SMCJ180C	TVS	Vbr=198..253.8V, Vrwm=180V, 9.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHS	-	TV30C181KB-G	TVS	Vrwm=180.0V, Vbr=200.16..244.80V, Ipp=9.31A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHT	-	3.0SMCJ180CA	TVS	Vbr=198..230.4V, Vrwm=180V, 10.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHT	-	SMDJ180CA	TVS	Vrwm=180.0V, Vbr=198.0..230.40V, Ipp=10.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IHT	-	TV30C181JB-G	TVS	Vrwm=180.0V, Vbr=200.0..220.0V, Ipp=10.29A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHU	-	3.0SMCJ190C	TVS	Vbr=209..267.9V, Vrwm=190V, 8.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHU	-	TV30C191KB-G	TVS	Vrwm=190.0V, Vbr=211.28..258.40V, Ipp=8.82A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHV	-	3.0SMCJ190CA	TVS	Vbr=209..243.2V, Vrwm=190V, 9.7A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHV	-	SMDJ190CA	TVS	Vrwm=190.0V, Vbr=209.0..243.20V, Ipp=9.7A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IHV	-	TV30C191JB-G	TVS	Vrwm=190.0V, Vbr=211.0..232.0V, Ipp=9.75A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHW	-	3.0SMCJ200C	TVS	Vbr=220..282.0V, Vrwm=200V, 8.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHW	-	TV30C201JB-G	TVS	Vrwm=200.0V, Vbr=224.0..247.0V, Ipp=9.26A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHX	-	3.0SMCJ200CA	TVS	Vbr=220..256.0V, Vrwm=200V, 9.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHX	-	SMDJ200CA	TVS	Vrwm=200.0V, Vbr=220.0..256.0V, Ipp=9.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IHX	-	TV30C221JB-G	TVS	Vrwm=220.0V, Vbr=246.0..272.0V, Ipp=8.43A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IHY	-	3.0SMCJ210C	TVS	Vbr=231..296.1V, Vrwm=210V, 7.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHZ	-	3.0SMCJ210CA	TVS	Vbr=231..268.8V, Vrwm=210V, 8.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IHZ	-	SMDJ210CA	TVS	Vrwm=210.0V, Vbr=231.0..268.8V, Ipp=8.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IHZ	-	TV30C251JB-G	TVS	Vrwm=250.0V, Vbr=279.0..309.0V, Ipp=7.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
II	-	SK26A	Si-diode	SBR, 60V, 2A, Vf<0.7V(2A)	DO-214AC	1d	2j	Fag
IID	-	3.0SMCJ220C	TVS	Vbr=242..310.2V, Vrwm=220V, 7.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IIE	-	3.0SMCJ220CA	TVS	Vbr=242..281.6V, Vrwm=220V, 8.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Pjt
IIE	-	SMDJ220CA	TVS	Vrwm=220.0V, Vbr=242.0..281.0V, Ipp=8.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1b	Rul
IJ	-	SK310B	Si-diode	SBR, 100V, 3A, Vf<0.85V(3A)	DO-214AA	1d	2j	Fag
IJE	-	TV30C301JB-G	TVS	Vrwm=300.0V, Vbr=335.0..371.0V, Ipp=6.17A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IJG	-	TV30C351JB-G	TVS	Vrwm=350.0V, Vbr=391.0..432.0V, Ipp=5.29A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IJK	-	TV30C401JB-G	TVS	Vrwm=400.0V, Vbr=447.0..494.0V, Ipp=4.63A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IJM	-	TV30C441JB-G	TVS	Vrwm=440.0V, Vbr=492.0..543.0V, Ipp=4.21A, 3000W(1ms), Bidir.	DO-214AB	1ba	2o	Cmc
IK	-	CD214A-T14A	TVS	Vrwm=14V, Irsm=17.2A, 400W(1ms)	DO-214AC	1d	1a	Brn
IK	-	P4SMAJ14A	TVS	Vrwm=14V, 17.2A, 400W (1ms)	DO-214AC	1d	1a	Pjt
IK	-	SK315B	Si-diode	SBR, 150V, 3A, Vf<0.95V(3A)	DO-214AA	1d	2j	Fag
IK	-	SMAJ14A	TVS	Vrwm=14V, Vbr=15.6..17.2V, 17.2A, 400W(1ms)	DO-214AC	1d	1m	Di
IK	-	SMF14A	TVS	Vrwm=14V, Vbr=15.6..17.2V, Ipp=8.6A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
IL	-	P4SMAJ15	TVS	Vrwm=15V, 14.8A, 400W (1ms)	DO-214AB	1d	1a	Pjt
IL	-	SK24A	Si-diode	SBR, 40V, 2A, Vf<0.5V(2A)	DO-214AC	1d	2j	Fag
IM	-	CD214A-T15A	TVS	Vrwm=15V, Irsm=16.4A, 400W(1ms)	DO-214AC	1d	1a	Brn
IM	-	P4SMAJ15A	TVS	Vrwm=15V, 16.4A, 400W (1ms)	DO-214AB	1d	1a	Pjt
IM	-	SMAJ15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, 16.4A, 400W(1ms)	DO-214AC	1d	1m	Di
IM	-	SMF15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, Ipp=8.2A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
IN	-	P4SMAJ16	TVS	Vrwm=16V, 13.8A, 400W (1ms)	DO-214AB	1d	1a	Pjt
IO	-	SK52C	Si-diode	SBR, 20V, 5A, Vf<0.55V(5A)	DO-214AB	1d	2j	Fag
IP	-	CD214A-T16A	TVS	Vrwm=16V, Irsm=15.3A, 400W(1ms)	DO-214AC	1d	1a	Brn
IP	-	P4SMAJ16A	TVS	Vrwm=16V, 15.3A, 400W (1ms)	DO-214AB	1d	1a	Pjt
IP	-	SK54C	Si-diode	SBR, 40V, 5A, Vf<0.55V(5A)	DO-214AB	1d	2j	Fag
IP	-	SMAJ16A	TVS	Vrwm=16V, Vbr=17.8..21.8V, 15.4A, 400W(1ms)	DO-214AC	1d	1m	Di
IP	-	SMF16A	TVS	Vrwm=16V, Vbr=17.8..19.7V, Ipp=7.7A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
IQ	-	P4SMAJ17	TVS	Vrwm=17V, 13.1A, 400W (1ms)	DO-214AB	1d	1a	Pjt
IQ	-	SK320B	Si-diode	SBR, 200V, 3A, Vf<0.95V(3A)	DO-214AA	1d	2j	Fag
IQ	-	SK56C	Si-diode	SBR, 60V, 5A, Vf<0.75V(5A)	DO-214AB	1d	2j	Fag
IR	-	CD214A-T17A	TVS	Vrwm=17V, Irsm=14.5A, 400W(1ms)	DO-214AC	1d	1a	Brn
IR	-	P4SMAJ17A	TVS	Vrwm=17V, 14.5A, 400W (1ms)	DO-214AB	1d	1a	Pjt
IR	-	SK510C	Si-diode	SBR, 100V, 5A, Vf<0.85V(5A)	DO-214AB	1d	2j	Fag
IR	-	SMAJ17A	TVS	Vrwm=17V, Vbr=18.9..20.9V, 14.5A, 400W(1ms)	DO-214AC	1d	1m	Di
IR	-	SMF17A	TVS	Vrwm=17V, Vbr=18.9..20.9V, Ipp=7.2A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
IR12	-	MBRS120	Si-diode	SBR, 20V, 1A, Vf<0.35V(1A)	DO-214AA	1d	1b	Irf
IR12A	-	MBRA120	Si-diode	SBR, 20V, 1A, Vf<0.34V(1A)	DO-214AC	1d	1b	Irf
IR14	-	MBRA140TR	Si-diode	SBR, 40V, 1A, Vf<0.49V(1A)	DO-214AC	1d	1b	Irf
IR1C	-	10BQ015	Si-diode	SBR, 15V, 1A, Vf<0.32V(1A)	DO-214AA	1d	1b	Irf
IR32	-	MBRS320TR	Si-diode	SBR, 20V, 3A, Vf<0.36V(3A)	DO-214AB	1d	1b	Irf
IR3C	-	30BQ015	Si-diode	SBR, 15V, 3A, Vf<0.3V(1A)	DO-214AB	1d	1b	Irf
IS	-	P4SMAJ18	TVS	Vrwm=18V, 12.4A, 400W (1ms)	DO-214AB	1d	1a	Pjt
IS	-	SK515C	Si-diode	SBR, 150V, 5A, Vf<0.95V(5A)	DO-214AB	1d	2j	Fag
IT	-	CD214A-T18A	TVS	Vrwm=18V, Irsm=13.7A, 400W(1ms)	DO-214AC	1d	1a	Brn

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
IT	-	P4SMAJ18A	TVS	Vrwm=18V, 13.7A, 400W (1ms)	DO-214AB	1d	1a	Pjt
IT	-	SK52B	Si-diode	SBR, 20V, 5A, Vf<0.55V(5A)	DO-214AA	1d	2j	Fag
IT	-	SMAJ18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, 13.7A, 400W(1ms)	DO-214AC	1d	1m	Di
IT	-	SMF18A	TVS	Vrwm=18V, Vbr=20..22.1V, Ipp=6.8A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
IU	-	P4SMAJ20	TVS	Vrwm=20V, 11.1A, 400W (1ms)	DO-214AB	1d	1a	Pjt
IU	-	SK54B	Si-diode	SBR, 40V, 5A, Vf<0.55V(5A)	DO-214AA	1d	2j	Fag
IV	-	CD214A-T20A	TVS	Vrwm=20V, Irsm=12.3A, 400W(1ms)	DO-214AC	1d	1a	Brn
IV	-	P4SMAJ20A	TVS	Vrwm=20V, 12.3A, 400W (1ms)	DO-214AC	1d	1a	Pjt
IV	-	SK56B	Si-diode	SBR, 60V, 5A, Vf<0.75V(5A)	DO-214AA	1d	2j	Fag
IV	-	SMAJ20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, 12.3A, 400W(1ms)	DO-214AC	1d	1m	Di
IV	-	SMF20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, Ipp=6.2A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
IW	-	P4SMAJ22	TVS	Vrwm=22V, 10.1A, 400W (1ms)	DO-214AC	1d	1a	Pjt
IW	-	SK510B	Si-diode	SBR, 100V, 5A, Vf<0.85V(5A)	DO-214AA	1d	2j	Fag
IX	-	CD214A-T22A	TVS	Vrwm=22V, Irsm=11.2A, 400W(1ms)	DO-214AC	1d	1a	Brn
IX	-	P4SMAJ22A	TVS	Vrwm=22V, 11.2A, 400W (1ms)	DO-214AC	1d	1a	Pjt
IX	-	SK515B	Si-diode	SBR, 150V, 5A, Vf<0.95V(5A)	DO-214AA	1d	2j	Fag
IX	-	SMAJ22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, 11.2A, 400W(1ms)	DO-214AC	1d	1m	Di
IX	-	SMF22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, Ipp=5.6A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
IY	-	P4SMAJ24	TVS	Vrwm=24V, 9.3A, 400W (1ms)	DO-214AC	1d	1a	Pjt
IY	-	SK210A	Si-diode	SBR, 100V, 2A, Vf<0.85V(2A)	DO-214AC	1d	2j	Fag
IZ	-	CD214A-T24A	TVS	Vrwm=24V, Irsm=10.3A, 400W(1ms)	DO-214AC	1d	1a	Brn
IZ	-	P4SMAJ24A	TVS	Vrwm=24V, 10.3A, 400W (1ms)	DO-214AC	1d	1a	Pjt
IZ	-	SK215A	Si-diode	SBR, 150V, 2A, Vf<0.95V(2A)	DO-214AC	1d	2j	Fag
IZ	-	SMAJ24A	TVS	Vrwm=24V, Vbr=26.7..29.5V, 10.3A, 400W(1ms)	DO-214AC	1d	1m	Di
IZ	-	SMF24A	TVS	Vrwm=24V, Vbr=26.7..29.5V, Ipp=5.1A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
J	-	1SS06AWT	Si-diode	SBD, Sw, 40V, 200mA, Vf<0.6V(200mA)	SOD-523FL	7d	1a	Sme
J	-	CDZ9.1B	Zener diode	9.1V±2.5%, Izt=40mA, 1W	VMN	7d	1s	Rhm
J	-	CH500H-40PT	Si-diode	SBD, 45V, 100mA, Vf<0.45V(10mA)	SOD-323	5d	1a	Chm
J	-	HVU357	C-diode	VCO, 10V, 19.5/23.5pF(1V)	SOD-323	5d	1a	Ren
J	-	MA27V15	C-diode	VCO, 6V, 2.98..7.30pF	SOD-523	6d	1a	Pan
J	-	MM9D10V	Zener diode	9.50..10.50V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	1n	Wtr
J	-	MM9D2V4	Zener diode	2.28..2.52V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1a	Wtr
j	-	MMSZ5236BPT	Zener diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 225mW	SOD-523	6d	1a	Chm
J	-	NZ9F10VT	Zener diode	9.50..10.50V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	1n	Ons
J	-	NZ9F2V4T	Zener diode	2.28..2.52V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1a	Ons
J	-	NZ9F5V6ST	Zener diode	5.49..5.73V, Izt=5mA, Zzt=60Ω, 200mW	SOD-923	7d	2m	Ons
J	au	MMSZ5260BPT	Zener diode	43V±5%, Izt= 3mA, Zzt=93Ω, 225mW	SOD-523	6d	1a	Chm
j.	-	MMSZ5236SPT	Zener diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 225mW	SOD-523	6d	1a	Chm
J.	au	MMSZ5260SPT	Zener diode	43V±5%, Izt= 3mA, Zzt=93Ω, 225mW	SOD-523	6d	1a	Chm
J.0	-	MMSZ5250C-V-G	Zener diode	20V±2%, Izt=6.2mA, Zzt=25Ω, 500mW	SOD-123	5d	1kb	Vs
J.6	-	MMSZ5246C-V-G	Zener diode	16V±2%, Izt=7.8mA, Zzt=17Ω, 500mW	SOD-123	5d	1kb	Vs
J.7	-	MMSZ5247C-V-G	Zener diode	17V±2%, Izt=7.4mA, Zzt=19Ω, 500mW	SOD-123	5d	1kb	Vs
J.8	-	MMSZ5248C-V-G	Zener diode	18V±2%, Izt=7mA, Zzt=21Ω, 500mW	SOD-123	5d	1kb	Vs
J.9	-	MMSZ5249C-V-G	Zener diode	19V±2%, Izt=6.6mA, Zzt=23Ω, 500mW	SOD-123	5d	1kb	Vs
J0	-	CMOZ39V	Zener diode	37.05..40.95V, Izt=5mA, Zzt=130Ω, 250mW	SOD-523	6d	1a	Cen
J0	-	MMPZ5255BPT	Zener diode	26.60..29.40V, Izt=5mA, Zzt=44Ω, 225mW	SOD-323	5d	1a	Chm
J0	-	MMSZ5250B-V-G	Zener diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 500mW	SOD-123	5d	1kb	Vs
J1	-	CMOZ16V	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 250mW	SOD-523	6d	1a	Cen
J1	-	CZRH5246B-G	Zener diode	15.2..16.8V, Zzt=17Ω, Izt=7.8mA, 150mW	SOD-523	6d	1a	Cmc
J1	-	CZRV5246B-G	Zener diode	15.2..16.8V, Zzt=17Ω, Izt=7.8mA, 200mW	SOD-323	5d	1a	Cmc
J1	-	CZRW5246B-G	Zener diode	15.20..16.80V, Zzt=17Ω, Izt=7.8mA, 500mW	SOD-123	5d	1a	Cmc
J1	-	FRS3A	Si-diode	Rectifier, Fast-Recovery 50V, 3A, <250ns	DO-214AB	1d	2j	Fag
J1	-	LMSZ5246BT1G	Zener diode	15.2..16.8V, Izt=7.8mA, 500mW	SOD-123	5d	1d	Lrc
J1	-	MM3Z5230B	Zener diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 200mW	SOD-323FL	7d	1a	Bts
J1	-	MM3Z5230BH	Zener diode	4.47..4.94V, Izt=20mA, Zzt=19Ω, 300mW	SOD-323	5d	1a	Zow
J1	-	MM3Z5246B	Zener diode	15.20..16.80V, Izt=7.8mA, Zzt=17Ω, 200mW	SOD-323	5d	1a	Ext
J1	-	MMBZ5246BV	Zener diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 200mW	SOD-523	6d	1a	Pjt
J1	-	MMSZ5246B	Zener diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 500mW	SOD-123	5d	1d	Di
J1	-	MMSZ5246B-F	Zener diode	15.20..16.80V, Izt=7.8mA, 500mW	SOD-123F	7d	1a	Ttr
J1	-	MMSZ5246BS	Zener diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 200mW	SOD-323	5d	1d	Di
J1	-	MMSZ5246BWS	Zener diode	15.20..16.80V, Izt=7.8mA, 200mW	SOD-323F	7d	1a	Ttr
J1	-	OYD16VT1	Zener diode	15.3...17.1V, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1a	Ouy
J1	ag	MMSZ5246B	Zener diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 500mW	SOD-123	5d	1d	Di
J12	-	DAM04SMA12	ESDP-diode	Vrwm=9.7V, Vbr=11.4..12.7V, Ipp=23.1A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J12	-	DAM06SMB12	ESDP-diode	Vrwm=9.7V, Vbr=11.4..12.7V, Ipp=34.7A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J12	-	DAM15SMC12	ESDP-diode	Vrwm=9.7V, Vbr=11.4..12.7V, Ipp=86.7A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J13	-	DAM04SMA13	ESDP-diode	Vrwm=10.5V, Vbr=12.4..14.1V, Ipp=21.1A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J13	-	DAM06SMB13	ESDP-diode	Vrwm=10.5V, Vbr=12.4..14.1V, Ipp=31.6A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J13	-	DAM15SMC13	ESDP-diode	Vrwm=10.5V, Vbr=12.4..14.1V, Ipp=78.9A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J15	-	DAM04SMA15	ESDP-diode	Vrwm=12.1V, Vbr=13.5..15.6V, Ipp=18.2A, 400W(1ms)	DO-214AC	1d	1kc	Hit

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
J15	-	DAM06SMB15	ESDP-diode	Vrwm=12.1V, Vbr=13.5..15.6V, Ipp=27.3A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J15	-	DAM15SMC15	ESDP-diode	Vrwm=12.1V, Vbr=13.5..15.6V, Ipp=68.2A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J16	-	DAM04SMA16	ESDP-diode	Vrwm=12.9V, Vbr=15.3..17.1V, Ipp=17.0A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J16	-	DAM06SMB16	ESDP-diode	Vrwm=12.9V, Vbr=15.3..17.1V, Ipp=25.5A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J16	-	DAM15SMC16	ESDP-diode	Vrwm=12.9V, Vbr=15.3..17.1V, Ipp=63.8A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J18	-	DAM04SMA18	ESDP-diode	Vrwm=14.5V, Vbr=16.8..19.1V, Ipp=15.1A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J18	-	DAM06SMB18	ESDP-diode	Vrwm=14.5V, Vbr=16.8..19.1V, Ipp=22.6A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J18	-	DAM15SMC18	ESDP-diode	Vrwm=14.5V, Vbr=16.8..19.1V, Ipp=56.6A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J2	-	BZD17C11P	Zener diode	10.4..11.6V, Zzt=4Ω, Izt=50mA, 800mW	SOD-123FL	7d	2u	Tsc
J2	-	CMOZ18V	Zener diode	17.10..18.90V, Izt=5mA, Zzt=45Ω, 250mW	SOD-523	6d	1a	Cen
J2	-	CZRH5247B-G	Zener diode	16.15..17.85V, Zzt=19Ω, Izt=7.5mA, 500mW	SOD-523	6d	1a	Cmc
J2	-	CZRV5247B-G	Zener diode	16.15..17.85V, Zzt=19Ω, Izt=7.5mA, 200mW	SOD-323	5d	1a	Cmc
J2	-	CZRW5247B-G	Zener diode	16.15..17.85V, Zzt=19Ω, Izt=7.4mA, 500mW	SOD-123	5d	1a	Cmc
J2	-	EDZ8.2B	Zener diode	8.02..8.36V, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Rhm
J2	-	EDZV8.2B	Zener diode	8.02..8.36V, Izt=5.0mA, Zzt=30Ω, 150mW	SOD-523	6d	2v	Rhm
J2	-	FDZ8.2EV	Zener diode	8.020..8.360V, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Fis
J2	-	FDZ8.2VT	Zener diode	8.020..8.360V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Fis
J2	-	FRS3B	Si-diode	Rectifier, Fast-Recovery 100V, 3A, <250ns	DO-214AB	1d	2j	Fag
J2	-	LBZT52B8V2T1G	Zener diode	8.02..8.36V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
J2	-	LEDZ8.2BT1G	Zener diode	8.02..8.36V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
J2	-	LMSZ5247BT1G	Zener diode	16.15..17.85V, Izt=7.4mA, 500mW	SOD-123	5d	1d	Lrc
J2	-	LUDZS8.2BT1G	Zener diode	8.02..8.36V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
J2	-	MM3Z5247B	Zener diode	16.15..17.85V, Izt=7.4mA, Zzt=19Ω, 200mW	SOD-323	5d	1a	Ext
J2	-	MM3Z5251B	Zener diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 200mW	SOD-323FL	7d	1a	Bts
J2	-	MM3Z5251BH	Zener diode	20.9..23.1V, Izt=5.6mA, Zzt=29Ω, 300mW	SOD-323	5d	1a	Zow
J2	-	MMBZ5247BV	Zener diode	17V±5%, Izt=8.0mA, Zzt=19Ω, 200mW	SOD-523	6d	1a	Pjt
J2	-	MMSZ5247B-F	Zener diode	16.15..17.85V, Izt=7.4mA, 500mW	SOD-123F	7d	1a	Ttr
J2	-	MMSZ5247BWS	Zener diode	16.15..17.85V, Izt=7.5mA, 200mW	SOD-323F	7d	1a	Ttr
J2	-	TDZ8.2B	Zener diode	8.2V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
J2	-	UDZS8.2B	Zener diode	8.02..8.36V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Wtr
J2	-	UDZS8.2B	Zener diode	8.2V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
J2	-	UDZV8.2B	Zener diode	8.02..8.36V, Izt=5.0mA, Zzt=30Ω, 200mW	SOD-323	5d	2v	Rhm
J2	-	VDZS8.2B	Zener diode	8.2V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
J20	-	DAM04SMA20	ESDP-diode	Vrwm=16.2V, Vbr=18.8..21.2V, Ipp=13.7A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J20	-	DAM06SMB20	ESDP-diode	Vrwm=16.2V, Vbr=18.8..21.2V, Ipp=20.6A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J20	-	DAM15SMC20	ESDP-diode	Vrwm=16.2V, Vbr=18.8..21.2V, Ipp=51.5A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J22	-	DAM04SMA22	ESDP-diode	Vrwm=17.8V, Vbr=20.8..23.3V, Ipp=12.5A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J22	-	DAM06SMB22	ESDP-diode	Vrwm=17.8V, Vbr=20.8..23.3V, Ipp=18.8A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J22	-	DAM15SMC22	ESDP-diode	Vrwm=17.8V, Vbr=20.8..23.3V, Ipp=47.0A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J24	-	DAM04SMA24	ESDP-diode	Vrwm=19.4V, Vbr=22.7..25.6V, Ipp=11.5A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J24	-	DAM06SMB24	ESDP-diode	Vrwm=19.4V, Vbr=22.7..25.6V, Ipp=17.3A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J24	-	DAM15SMC24	ESDP-diode	Vrwm=19.4V, Vbr=22.7..25.6V, Ipp=43.2A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J27	-	DAM04SMA27	ESDP-diode	Vrwm=21.8V, Vbr=25.1..28.9V, Ipp=10.2A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J27	-	DAM06SMB27	ESDP-diode	Vrwm=21.8V, Vbr=25.1..28.9V, Ipp=15.3A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J27	-	DAM15SMC27	ESDP-diode	Vrwm=21.8V, Vbr=25.1..28.9V, Ipp=38.4A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J3	-	BZD17C12P	Zener diode	11.4..12.7V, Zzt=4Ω, Izt=50mA, 800mW	SOD-123FL	7d	2u	Tsc
J3	-	CMOZ20V	Zener diode	19.0..21.0V, Izt=5mA, Zzt=55Ω, 250mW	SOD-523	6d	1a	Cen
J3	-	CZRH5248B-G	Zener diode	17.1..18.9V, Zzt=21Ω, Izt=7mA, 150mW	SOD-523	6d	1a	Cmc
J3	-	CZRV5248B-G	Zener diode	17.1..18.9V, Zzt=21Ω, Izt=7mA, 200mW	SOD-323	5d	1a	Cmc
J3	-	CZRW5248B-G	Zener diode	17.10..18.90V, Zzt=21Ω, Izt=7.0mA, 500mW	SOD-123	5d	1a	Cmc
J3	-	FRS3D	Si-diode	Rectifier, Fast-Recovery 200V, 3A, <250ns	DO-214AB	1d	2j	Fag
J3	-	LMSZ5248BT1G	Zener diode	17.1..18.9V, Izt=7mA, 500mW	SOD-123	5d	1d	Lrc
J3	-	MM3Z5248B	Zener diode	17.10..18.9V, Izt=7.0mA, Zzt=21Ω, 200mW	SOD-323	5d	1a	Ext
J3	-	MMBZ5248BV	Zener diode	18V±5%, Izt=7.0mA, Zzt=23Ω, 200mW	SOD-523	6d	1a	Pjt
J3	-	MMSZ5248B	Zener diode	18V±5%, Izt=7mA, Zzt=21Ω, 500mW	SOD-123	5d	1d	Di
J3	-	MMSZ5248B-F	Zener diode	17.10..18.90V, Izt=7.0mA, 500mW	SOD-123F	7d	1a	Ttr
J3	-	MMSZ5248BS	Zener diode	18V±5%, Izt=7mA, Zzt=21Ω, 200mW	SOD-323	5d	1d	Di
J3	-	MMSZ5248BWS	Zener diode	17.10..18.90V, Izt=7.0mA, 200mW	SOD-323F	7d	1a	Ttr
J3	-	OYD18VT1	Zener diode	16.8...19.1V, Izt=5mA, Zzt=45Ω, 500mW	SOD-123	5d	1a	Ouy
J3	-	RKZ12B2KK	Zener diode	11.74..12.24V, Izt=5mA, Zzt=35Ω, 150mW	SFP	7d	1a	Ren
J3	-	RKZ12B2KL	Zener diode	11.74..12.24V, Izt=5mA, Zzt=35Ω, 100mW	EFP	7d	1a	Ren
J3	ag	MMSZ5248B	Zener diode	18V±5%, Izt=7mA, Zzt=21Ω, 500mW	SOD-123	5d	1d	Di
J30	-	DAM04SMA30	ESDP-diode	Vrwm=24.3V, Vbr=28.0..32.0V, Ipp=9.2A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J30	-	DAM06SMB30	ESDP-diode	Vrwm=24.3V, Vbr=28.0..32.0V, Ipp=13.8A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J30	-	DAM15SMC30	ESDP-diode	Vrwm=24.3V, Vbr=28.0..32.0V, Ipp=34.5A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J33	-	DAM04SMA33	ESDP-diode	Vrwm=26.8V, Vbr=31.0..35.0V, Ipp=8.4A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J33	-	DAM06SMB33	ESDP-diode	Vrwm=26.8V, Vbr=31.0..35.0V, Ipp=12.6A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J33	-	DAM15SMC33	ESDP-diode	Vrwm=26.8V, Vbr=31.0..35.0V, Ipp=31.4A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J36	-	DAM04SMA36	ESDP-diode	Vrwm=29.1V, Vbr=33.4..38.6V, Ipp=7.7A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J36	-	DAM06SMB36	ESDP-diode	Vrwm=29.1V, Vbr=33.4..38.6V, Ipp=11.5A, 600W(1ms)	DO-214AA	1d	1kc	Hit

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
J36	-	DAM15SMC36	ESDP-diode	Vrwm=29.1V, Vbr=33.4..38.6V, Ipp=28.8A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J39	-	DAM04SMA39	ESDP-diode	Vrwm=31.6V, Vbr=36.1..41.9V, Ipp=7.1A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J39	-	DAM06SMB39	ESDP-diode	Vrwm=31.6V, Vbr=36.1..41.9V, Ipp=10.6A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J39	-	DAM15SMC39	ESDP-diode	Vrwm=31.6V, Vbr=36.1..41.9V, Ipp=26.6A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J4	-	BZD17C13P	Zener diode	12.4..14.1V, Zzt=5Ω, Izt=50mA, 800mW	SOD-123FL	7d	2u	Tsc
J4	-	CMOZ22V	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 250mW	SOD-523	6d	1a	Cen
J4	-	FRS3G	Si-diode	Rectifier, Fast-Recovery 400V, 3A, <250ns	DO-214AB	1d	2j	Fag
J4	-	MM1Z5230B	Zener diode	4.47..4.94V, Izt=20mA, Zzt=19Ω, 500mW	SOD-323FL	7d	1a	Eic
J4	-	MM1Z5230BH	Zener diode	4.47..4.94V, Izt=20mA, Zzt=19Ω, 500mW	SOD-123	5d	1a	Zow
J4	-	MMBZ5249BV	Zener diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 200mW	SOD-523	6d	1a	Pjt
J4	-	MMSZ5230B	Zener diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 500mW	SOD-123	5d	1a	Eic
J4	-	MMSZ5249B-F	Zener diode	18.05..19.95V, Izt=6.6mA, 500mW	SOD-123F	7d	1a	Ttr
J4	-	MMSZ5249BWS	Zener diode	18.05..19.95V, Izt=6.6mA, 200mW	SOD-323F	7d	1a	Ttr
J43	-	DAM04SMA43	ESDP-diode	Vrwm=34.8V, Vbr=39.8..46.2V, Ipp=6.5A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J43	-	DAM06SMB43	ESDP-diode	Vrwm=34.8V, Vbr=39.8..46.2V, Ipp=9.7A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J43	-	DAM15SMC43	ESDP-diode	Vrwm=34.8V, Vbr=39.8..46.2V, Ipp=24.2A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J47	-	DAM04SMA47	ESDP-diode	Vrwm=38.0V, Vbr=43.3..50.7V, Ipp=5.9A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J47	-	DAM06SMB47	ESDP-diode	Vrwm=38.0V, Vbr=43.3..50.7V, Ipp=8.9A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J47	-	DAM15SMC47	ESDP-diode	Vrwm=38.0V, Vbr=43.3..50.7V, Ipp=22.2A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J5	-	BZD17C15P	Zener diode	13.8..15.6V, Zzt=5Ω, Izt=25mA, 800mW	SOD-123FL	7d	2u	Tsc
J5	-	BZX584B13V	Zener diode	12.74..13.26V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523FL	7d	1a	Tac
J5	-	CMOZ24V	Zener diode	22.80..25.20V, Izt=5mA, Zzt=70Ω, 250mW	SOD-523	6d	1a	Cen
J5	-	CZRH5250B-G	Zener diode	19..21V, Zzt=25Ω, Izt=6.2mA, 150mW	SOD-523	6d	1a	Cmc
J5	-	CZRV5250B-G	Zener diode	19..21V, Zzt=25Ω, Izt=6.2mA, 200mW	SOD-323	5d	1a	Cmc
J5	-	CZRW5250B-G	Zener diode	19.0..21.0V, Zzt=25Ω, Izt=6.2mA, 500mW	SOD-123	5d	1a	Cmc
J5	-	FRS3J	Si-diode	Rectifier, Fast-Recovery 600V, 3A, <250ns	DO-214AB	1d	2j	Fag
J5	-	LMSZ5250BT1G	Zener diode	19..21V, Izt=6.2mA, 500mW	SOD-123	5d	1d	Lrc
J5	-	MM1Z5251B	Zener diode	20.90..23.10V, Izt=5.6mA, Zzt=29Ω, 500mW	SOD-323FL	7d	1a	Eic
J5	-	MM1Z5251BH	Zener diode	20.9..23.1V, Izt=5.6mA, Zzt=29Ω, 500mW	SOD-123	5d	1a	Zow
J5	-	MM3Z5250B	Zener diode	19.0..21.0V, Izt=6.2mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Ext
J5	-	MM5Z13VB	Zener diode	12.74..13.26V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523FL	7d	1a	Tac
J5	-	MMBZ5250BV	Zener diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 200mW	SOD-523	6d	1a	Pjt
J5	-	MMSZ5250B	Zener diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 500mW	SOD-123	5d	1d	Di
J5	-	MMSZ5250B-F	Zener diode	19.00 21.0V, Izt=6.2mA, 500mW	SOD-123F	7d	1a	Ttr
J5	-	MMSZ5250BS	Zener diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 200mW	SOD-323	5d	1d	Di
J5	-	MMSZ5250BWS	Zener diode	19.0..21.0V, Izt=6.2mA, 200mW	SOD-323F	7d	1a	Ttr
J5	-	MMSZ5251B	Zener diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 500mW	SOD-123	5d	1a	Eic
J5	-	OYD20VT1	Zener diode	18.8...21.2V, Izt=5mA, Zzt=50Ω, 500mW	SOD-123	5d	1a	Ouy
J5	ag	MMSZ5250B	Zener diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 500mW	SOD-123	5d	1d	Di
J51	-	DAM04SMA51	ESDP-diode	Vrwm=41.3V, Vbr=46.9..55.1V, Ipp=5.4A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J51	-	DAM06SMB51	ESDP-diode	Vrwm=41.3V, Vbr=46.9..55.1V, Ipp=8.1A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J51	-	DAM15SMC51	ESDP-diode	Vrwm=41.3V, Vbr=46.9..55.1V, Ipp=20.3A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J6	-	BZD17C16P	Zener diode	15.3..17.1V, Zzt=6Ω, Izt=25mA, 800mW	SOD-123FL	7d	2u	Tsc
J6	-	CMOZ27V	Zener diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 250mW	SOD-523	6d	1a	Cen
J6	-	FRS3K	Si-diode	Rectifier, Fast-Recovery 800V, 3A, <250ns	DO-214AB	1d	2j	Fag
J6	-	MMSZ5246B-V-G	Zener diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 500mW	SOD-123	5d	1kb	Vs
J6	-	RKZ13B2KK	Zener diode	12.91..13.49V, Izt=5mA, Zzt=35Ω, 150mW	SFP	7d	1a	Ren
J6	-	RKZ13B2KL	Zener diode	12.91..13.49V, Izt=5mA, Zzt=35Ω, 100mW	EFP	7d	1a	Ren
J68	-	DAM04SMA68	ESDP-diode	Vrwm=55.1V, Vbr=61.2..74.8V, Ipp=4.1A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J68	-	DAM06SMB68	ESDP-diode	Vrwm=55.1V, Vbr=61.2..74.8V, Ipp=6.1A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J68	-	DAM15SMC68	ESDP-diode	Vrwm=55.1V, Vbr=61.2..74.8V, Ipp=15.3A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J7	-	BZD17C18P	Zener diode	16.8..19.1V, Zzt=6Ω, Izt=25mA, 800mW	SOD-123FL	7d	2u	Tsc
J7	-	CMOZ30V	Zener diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 250mW	SOD-523	6d	1a	Cen
J7	-	FRS3M	Si-diode	Rectifier, Fast-Recovery 1000V, 3A, <250ns	DO-214AB	1d	2j	Fag
J7	-	MMSZ5247B-V-G	Zener diode	17V±5%, Izt=7.4mA, Zzt=19Ω, 500mW	SOD-123	5d	1kb	Vs
J75	-	DAM04SMA75	ESDP-diode	Vrwm=60.7V, Vbr=67.5..82.5V, Ipp=3.7A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J75	-	DAM06SMB75	ESDP-diode	Vrwm=60.7V, Vbr=67.5..82.5V, Ipp=5.6A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J75	-	DAM15SMC75	ESDP-diode	Vrwm=60.7V, Vbr=67.5..82.5V, Ipp=13.9A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J8	-	BZD27C7V5P	TVS	Vbr=7V, Vcl=11.3V, 13.3A, 150W(1ms)	SOD-123FL	7d	1a	Lge
J8	-	BZT52C6V2WT	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 200mW	SOD-523	6d	1a	Ttr
J8	-	CMOZ33V	Zener diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 250mW	SOD-523	6d	1a	Cen
J8	-	MM5Z6V2	Zener diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-523	6d	1a	Eic
J8	-	MM5Z6V2H	Zener diode	5.8..6.6V, Izt=5mA, Zzt=10Ω, 200mW	SOD-523	6d	1a	Zow
J8	-	MMSZ5248B-V-G	Zener diode	18V±5%, Izt=7mA, Zzt=21Ω, 500mW	SOD-123	5d	1kb	Vs
J82	-	DAM06SMB82	ESDP-diode	Vrwm=66.4V, Vbr=73.8..90.2V, Ipp=5.1A, 600W(1ms)	DO-214AA	1d	1kc	Hit
J82	-	DAM15SMC82	ESDP-diode	Vrwm=66.4V, Vbr=73.8..90.2V, Ipp=12.7A, 1500W(1ms)	DO-214AB	1d	1kc	Hit
J85	-	DAM04SMA82	ESDP-diode	Vrwm=66.4V, Vbr=73.8..90.2V, Ipp=3.4A, 400W(1ms)	DO-214AC	1d	1kc	Hit
J9	-	BZD27C8V2P	TVS	Vbr=7.7V, Vcl=12.3V, 12.2A, 150W(1ms)	SOD-123FL	7d	1a	Lge
J9	-	BZT52C75WT	Zener diode	70..79V, Izt=1mA, 200mW	SOD-523	6d	1a	Ttr
J9	-	CMOZ36V	Zener diode	34.20..37.80V, Izt=5mA, Zzt=90Ω, 250mW	SOD-523	6d	1a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
J9	-	MM5Z75H	Zener diode	70..79V, Izt=1mA, Zzt=255Ω, 200mW	SOD-523	6d	1a	Zow
J9	-	MM5Z75V	Zener diode	75V±5%, Izt=2mA, Zzt=255Ω, 200mW	SOD-523	6d	1a	Eic
J9	-	MMSZ5249B-V-G	Zener diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 500mW	SOD-123	5d	1kb	Vs
J9	-	RKZ15B2KK	Zener diode	14.34..14.98V, Izt=5mA, Zzt=40Ω, 150mW	SFP	7d	1a	Ren
J9	-	RKZ15B2KL	Zener diode	14.34..14.98V, Izt=5mA, Zzt=40Ω, 100mW	EFP	7d	1a	Ren
JA	-	BZT52B20WT	Zener diode	19.60..20.40V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
JA	-	KDS135	Si-diode	Sw, 250V, 100mA, Vf<1.2V(100mA), 100ns	USC	5d	1a	Kec
JA	-	MM5ZB20H	Zener diode	19.6..20.4V, Zzt=50Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
JA	-	RL52Z20	Zener diode	19.6..20.4V, Zzt=50Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
JA	-	S1JA	Si-diode	Rectifier, 600V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1k	Vs
JB	-	BZT52B22WT	Zener diode	21.56..22.44V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
JB	-	KDZ4.3B	Zener diode	4.3V±2.5%, 40mA, 1W	PMDU	7d	1s	Rhm
JB	-	MM5ZB22H	Zener diode	21.56..22.44V, Zzt=55Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
JB	-	RL52Z22	Zener diode	21.56..22.44V, Zzt=55Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
JC	-	BZT52B24WT	Zener diode	23.52..24.48V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
JC	-	CH740H-40PT	Si-diode	SBD, 40V, 40mA, Vf<1V(2mA)	SOD-323	5d	1a	Chm
JC	-	MM5ZB24H	Zener diode	23.52..24.48V, Zzt=60Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
JC	-	RL52Z24	Zener diode	23.52..24.48V, Zzt=60Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
JD	-	BZT52B27WT	Zener diode	26.46..27.54V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
JD	-	MM5ZB27H	Zener diode	26.46..27.54V, Zzt=70Ω, Izt=2mA, 200mW	SOD-523	6d	1a	Zow
JD	-	P4SMAJ26	TVS	Vrwm=26V, 8.6A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JD	-	RL52Z27	Zener diode	26.46..27.54V, Zzt=70Ω, Izt=2mA, 200mW	SOD-523	6d	1b	Rul
JE	-	BZT52B30WT	Zener diode	29.40..30.60V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
JE	-	CD214A-T26A	TVS	Vrwm=26V, Irsm=9.5A, 400W(1ms)	DO-214AC	1d	1a	Brn
JE	-	MM5ZB30H	Zener diode	29.4..30.6V, Zzt=80Ω, Izt=2mA, 200mW	SOD-523	6d	1a	Zow
JE	-	P4SMAJ26A	TVS	Vrwm=26V, 9.5A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JE	-	RL52Z30	Zener diode	29.4..30.6V, Zzt=80Ω, Izt=2mA, 200mW	SOD-523	6d	1b	Rul
JE	-	SMAJ26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, 9.5A, 400W(1ms)	DO-214AC	1d	1m	Di
JE	-	SMF26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, Ipp=4.8A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
JE	-	TV02W260-G	TVS	Vrwm=26V, Vbr=28.9..31.9V, Ipp=4.75A, 200W(1ms)	SOD-123	5d	2o	Cmc
JE	-	Z2SMB6V2	Zener diode	6.2V±5%, Izt=100mA, 2W	DO-214AA	1d	2j	Fag
JF	-	BZT52B33WT	Zener diode	32.34..33.66V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
JF	-	KDZ13FV	Zener diode	12.40..14.10V, Izt=5mA, Zzt=15Ω, 100mW	TFSC	7d	1a	Kec
JF	-	MAZD110	Zener diode	10.40..11.6V, Zzt=30Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
JF	-	MM5ZB33H	Zener diode	32.34..33.66V, Zzt=80Ω, Izt=2mA, 200mW	SOD-523	6d	1a	Zow
JF	-	P4SMAJ28	TVS	Vrwm=28V, 8A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JF	-	RL52Z33	Zener diode	32.34..33.66V, Zzt=80Ω, Izt=2mA, 200mW	SOD-523	6d	1b	Rul
JG	-	CD214A-T28A	TVS	Vrwm=28V, Irsm=8.8A, 400W(1ms)	DO-214AC	1d	1a	Brn
JG	-	P4SMAJ28A	TVS	Vrwm=28V, 8.8A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JG	-	SMAJ28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, 8.8A, 400W(1ms)	DO-214AC	1d	1m	Di
JG	-	SMF28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, Ipp=4.4A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
JG	-	TV02W130B-G	TVS	Vrwm=13V, Vbr=14.4..15.9V, Ipp=9.30A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
JG	-	TV02W280-G	TVS	Vrwm=28V, Vbr=31.1..34.4V, Ipp=4.41A, 200W(1ms)	SOD-123	5d	2o	Cmc
JH	-	BZT52B36WT	Zener diode	35.28..36.72V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
JH	-	MM5ZB36H	Zener diode	35.28..36.72V, Zzt=90Ω, Izt=2mA, 200mW	SOD-523	6d	1a	Zow
JH	-	P4SMAJ30	TVS	Vrwm=30V, 7.5A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JH	-	RL52Z36	Zener diode	35.28..36.72V, Zzt=90Ω, Izt=2mA, 200mW	SOD-523	6d	1b	Rul
JI	-	CH321H-10PT	Si-diode	SBD, 10V, 2A, Vf<0.6V(1A)	SOD-323	5d	1a	Chm
JJ	-	BZT52B39WT	Zener diode	38.22..39.78V, Izt=2.5mA, 200mW	SOD-523	6d	1a	Ttr
JJ	-	MM5ZB39H	Zener diode	38.22..39.78V, Zzt=100Ω, Izt=2mA, 200mW	SOD-523	6d	1a	Zow
JJ	-	RL52Z39	Zener diode	38.22..39.78V, Zzt=100Ω, Izt=2mA, 200mW	SOD-523	6d	1b	Rul
JK	-	BZT52B43WT	Zener diode	42.14..43.86V, Izt=2.5mA, 200mW	SOD-523	6d	1a	Ttr
JK	-	CD214A-T30A	TVS	Vrwm=30V, Irsm=8.3A, 400W(1ms)	DO-214AC	1d	1a	Brn
JK	-	CH331H-10PT	Si-diode	SBD, 10V, 3A, Vf<0.6V(1A)	SOD-323	5d	1a	Chm
JK	-	MM5ZB43H	Zener diode	42.14..43.86V, Zzt=130Ω, Izt=2mA, 200mW	SOD-523	6d	1a	Zow
JK	-	P4SMAJ30A	TVS	Vrwm=30V, 8.3A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JK	-	RL52Z43	Zener diode	42.14..43.86V, Zzt=130Ω, Izt=2mA, 200mW	SOD-523	6d	1b	Rul
JK	-	SMAJ30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, 8.3A, 400W(1ms)	DO-214AC	1d	1m	Di
JK	-	SMF30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, Ipp=4.1A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
JK	-	TV02W300-G	TVS	Vrwm=30V, Vbr=33.3..36.8V, Ipp=4.13A, 200W(1ms)	SOD-123	5d	2o	Cmc
JL	-	CH301H-40PT	Si-diode	SBD, 40V, 100mA, Vf<0.55V(100mA)	SOD-323	5d	1a	Chm
JL	-	P4SMAJ33	TVS	Vrwm=33V, 6.8A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JM	-	BZT52B47WT	Zener diode	46.06..47.94V, Izt=2.5mA, 200mW	SOD-523	6d	1a	Ttr
JM	-	CD214A-T33A	TVS	Vrwm=33V, Irsm=7.5A, 400W(1ms)	DO-214AC	1d	1a	Brn
JM	-	MM5ZB47H	Zener diode	46.06..47.94V, Zzt=150Ω, Izt=2mA, 200mW	SOD-523	6d	1a	Zow
JM	-	P4SMAJ33A	TVS	Vrwm=33V, 7.5A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JM	-	RL52Z47	Zener diode	46.06..47.94V, Zzt=150Ω, Izt=2mA, 200mW	SOD-523	6d	1b	Rul
JM	-	SMAJ33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, 7.5A, 400W(1ms)	DO-214AC	1d	1m	Di
JM	-	SMF33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, Ipp=3.8A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
JM	-	TV02W330-G	TVS	Vrwm=33V, Vbr=36.7..40.6V, Ipp=3.75A, 200W(1ms)	SOD-123	5d	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
JN	-	P4SMAJ36	TVS	Vrwm=36V, 6.2A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JP	-	CD214A-T36A	TVS	Vrwm=36V, Irsm=6.9A, 400W(1ms)	DO-214AC	1d	1a	Brn
JP	-	CMDZ4L3	Zener diode	4.085..4.515V, Izt=0.5mA, Zzt=900Ω, 250mW	SOD-323	5d	1a	Cen
JP	-	KDZ13FVY	Zener diode	12.91..13.49V, Izt=5mA, Zzt=15Ω, 100mW	TFSC	7d	1a	Kec
JP	-	P4SMAJ36A	TVS	Vrwm=36V, 6.9A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JP	-	SMAJ36A	TVS	Vrwm=36V, Vbr=40.0..44.2V, 6.9A, 400W(1ms)	DO-214AC	1d	1m	Di
JP	-	SMF36A	TVS	Vrwm=36V, Vbr=40..44.2V, Ipp=3.4A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
JP	-	TV02W360-G	TVS	Vrwm=36V, Vbr=40.0..44.2V, Ipp=3.44A, 200W(1ms)	SOD-123	5d	2o	Cmc
JQ	-	P4SMAJ40	TVS	Vrwm=40V, 5.6A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JQ	-	TDZ5V6J	Zener diode	5.49..5.71V, Izt=5mA, Zzt=40Ω, 500mW	SOD-323F	7d	1a	Nxp
JR	-	BAS20H	Si-diode	Sw, Fast, 150V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOD-323	5d	1u	Ons
JR	-	CD214A-T40A	TVS	Vrwm=40V, Irsm=6.2A, 400W(1ms)	DO-214AC	1d	1a	Brn
JR	-	P4SMAJ40A	TVS	Vrwm=40V, 6.2A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JR	-	SMAJ40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, 6.2A, 400W(1ms)	DO-214AC	1d	1m	Di
JR	-	SMF40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, Ipp=3.1A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
JR	-	TV02W400-G	TVS	Vrwm=40V, Vbr=44.4..49.1V, Ipp=3.10A, 200W(1ms)	SOD-123	5d	2o	Cmc
JS	-	BAS16S2	Si-diode	Sw, Fast, 75V, 200mA, 200mW, <6ns	SOD-323	5d	1a	Cys
JS	-	BAS21H	Si-diode	Sw, Fast, 200V, 250mA, 250mW, <50ns	SOD-323	5d	1a	Ons
JS	-	BAS221	Si-diode	GP, 200V, 300mA, 400mW, Vf<1.4V(300mA), <50ns	SOD-110	12d	1a	Phi
JS	-	CH501H-40PT	Si-diode	SBD, 45V, 100mA, Vf<0.55V(100mA)	SOD-323	5d	1a	Chm
JS	-	CH801H-30PT	Si-diode	SBD, 30V, 100mA, Vf<0.45V(100mA)	SOD-323	5d	1a	Chm
JS	-	MMSD103	Si-diode	Sw, 250V, 200mA, 400mW, Vf<1.25V(200mA), <50ns	SOD-123	5d	1a	Ons
JS	-	P4SMAJ43	TVS	Vrwm=43V, 5.2A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JT	-	CD214A-T43A	TVS	Vrwm=43V, Irsm=5.7A, 400W(1ms)	DO-214AC	1d	1a	Brn
JT	-	CH511H-40PT	Si-diode	SBD, 40V, 1A, Vf<0.6V(1A)	SOD-323	5d	1a	Chm
JT	-	CH651H-40PT	Si-diode	SBD, 40V, 750mA, Vf<0.7V(750mA)	SOD-323	5d	1a	Chm
JT	-	P4SMAJ43A	TVS	Vrwm=43V, 5.7A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JT	-	SMAJ43A	TVS	Vrwm=43V, Vbr=47.8..52.8V, 5.7A, 400W(1ms)	DO-214AC	1d	1m	Di
JT	-	SMF43A	TVS	Vrwm=43V, Vbr=47.8..52.8V, Ipp=2.9A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
JT	-	TV02W430-G	TVS	Vrwm=43V, Vbr=47.8..52.8V, Ipp=2.88A, 200W(1ms)	SOD-123	5d	2o	Cmc
JU	-	CH351H-30PT	Si-diode	SBD, 30V, 200mA, Vf<0.55V(100mA)	SOD-323	5d	1a	Chm
JU	-	P4SMAJ45	TVS	Vrwm=45V, 5A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JV	-	BAT54H	Si-diode	SBR, 30V, 200mA, Vf<0.52V(100mA), <5ns	SOD-323	5d	1a	Ons
JV	-	CD214A-T45A	TVS	Vrwm=45V, Irsm=5.5A, 400W(1ms)	DO-214AC	1d	1a	Brn
JV	-	CH751H-40PT	Si-diode	SBD, 40V, 30mA, Vf<0.37V(1mA)	SOD-323	5d	1a	Chm
JV	-	P4SMAJ45A	TVS	Vrwm=45V, 5.5A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JV	-	SMAJ45A	TVS	Vrwm=45V, Vbr=50.0..55.3V, 5.5A, 400W(1ms)	DO-214AC	1d	1m	Di
JV	-	SMF45A	TVS	Vrwm=45V, Vbr=50..55.3 V, Ipp=2.8A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
JV	-	TV02W450-G	TVS	Vrwm=45V, Vbr=50.0..55.3V, Ipp=2.75A, 200W(1ms)	SOD-123	5d	2o	Cmc
JW	-	CH651H-60PT	Si-diode	SBD, 60V, 1A, Vf<0.58V(700mA)	SOD-323	5d	1a	Chm
JW	-	P4SMAJ48	TVS	Vrwm=48V, 4.7A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JWA	-	1.5SMC200C	TVS	Vrwm=162V, Vbr=180..220V, Ipp=5.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JWB	-	1.5SMC200CA	TVS	Vrwm=171V, Vbr=190..210V, Ipp=5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JWC	-	1.5SMC220C	TVS	Vrwm=175V, Vbr=198..242V, Ipp=4.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JWD	-	1.5SMC220CA	TVS	Vrwm=175V, Vbr=198..242V, Ipp=4.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JWE	-	1.5SMC250C	TVS	Vrwm=202V, Vbr=225..275V, Ipp=4.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JWF	-	1.5SMC250CA	TVS	Vrwm=214V, Vbr=237..263V, Ipp=4.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JX	-	CD214A-T48A	TVS	Vrwm=48V, Irsm=5.2A, 400W(1ms)	DO-214AC	1d	1a	Brn
JX	-	CH651L-40PT	Si-diode	SBD, 40V, 1A, Vf<0.52V(700mA)	SOD-323	5d	1a	Chm
JX	-	P4SMAJ48A	TVS	Vrwm=48V, 5.2A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JX	-	SMAJ48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, 5.2A, 400W(1ms)	DO-214AC	1d	1m	Di
JX	-	SMF48A	TVS	Vrwm=48V, Vbr=53.3..58V, Ipp=2.6A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
JX	-	TV02W480-G	TVS	Vrwm=48V, Vbr=53.3..58.9V, Ipp=2.58A, 200W(1ms)	SOD-123	5d	2o	Cmc
JXA	-	1.5SMC22C	TVS	Vrwm=17.8V, Vbr=19.8..24.2V, Ipp=47A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXB	-	1.5SMC22CA	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, Ipp=49A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXC	-	1.5SMC24C	TVS	Vrwm=19.4V, Vbr=21.6..26.4V, Ipp=43A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXD	-	1.5SMC24CA	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, Ipp=45A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXE	-	1.5SMC27C	TVS	Vrwm=21.8V, Vbr=24.3..29.7V, Ipp=38.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXF	-	1.5SMC27CA	TVS	Vrwm=23.1V, Vbr=25.7..28.4 V, Ipp=40A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXG	-	1.5SMC30C	TVS	Vrwm=24.3V, Vbr=27..33V, Ipp=34.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXH	-	1.5SMC30CA	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, Ipp=36A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXJ	-	1.5SMC33C	TVS	Vrwm=26.8V, Vbr=29.7..36.3V, Ipp=31.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXK	-	1.5SMC33CA	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, Ipp=33A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXL	-	1.5SMC36C	TVS	Vrwm=29.1V, Vbr=32.4..39.6V, Ipp=29A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXM	-	1.5SMC36CA	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, Ipp=30A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXN	-	1.5SMC39C	TVS	Vrwm=31.6V, Vbr=35.1..42.9V, Ipp=26.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXP	-	1.5SMC39CA	TVS	Vrwm=33.3V, Vbr=37.1..41V, Ipp=28A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXQ	-	1.5SMC43C	TVS	Vrwm=34.8V, Vbr=38.7..47.3V, Ipp=24A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXR	-	1.5SMC43CA	TVS	Vrwm=36.8V, Vbr=40.9..45.2V, Ipp=25.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXS	-	1.5SMC47C	TVS	Vrwm=38.1V, Vbr=42.3..51.7V, Ipp=22.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
JXT	-	1.5SMC47CA	TVS	Vrwm=40.2V, Vbr=44.7..49.4V, Ipp=23.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXU	-	1.5SMC51C	TVS	Vrwm=41.3V, Vbr=45.9..56.1V, Ipp=20.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXV	-	1.5SMC51CA	TVS	Vrwm=43.6V, Vbr=48.5..53.6V, Ipp=21.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXW	-	1.5SMC56C	TVS	Vrwm=45.6V, Vbr=50.4..61.6V, Ipp=18.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXX	-	1.5SMC56CA	TVS	Vrwm=47.8V, Vbr=53.2..58.8V, Ipp=19.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXY	-	1.5SMC62C	TVS	Vrwm=50.2V, Vbr=55.8..68.2V, Ipp=16.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JXZ	-	1.5SMC62CA	TVS	Vrwm=53V, Vbr=58.9..65.1V, Ipp=17.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JY	-	KDZ4.3VVY	Zener diode	4.17..4.43V, Izt=5mA, Zzt=130Ω, 100mW	VSC	7d	1a	Kec
JY	-	P4SMAJ51	TVS	Vrwm=51V, 4.4A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JYA	-	1.5SMC68C	TVS	Vrwm=55.1V, Vbr=61.2..74.8V, Ipp=15.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYB	-	1.5SMC68CA	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, Ipp=16.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYC	-	1.5SMC75C	TVS	Vrwm=60.7V, Vbr=67.5..82.5V, Ipp=13.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYD	-	1.5SMC75CA	TVS	Vrwm=64.1V, Vbr=71.3..78.8V, Ipp=14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYE	-	1.5SMC82C	TVS	Vrwm=66.4V, Vbr=73.8..90.2V, Ipp=12.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYF	-	1.5SMC82CA	TVS	Vrwm=70.1V, Vbr=77.9..86.1V, Ipp=13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYG	-	1.5SMC91C	TVS	Vrwm=73.7V, Vbr=81.9..100V, Ipp=11.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYH	-	1.5SMC91CA	TVS	Vrwm=77.8V, Vbr=86.5..95.5V, Ipp=12A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYJ	-	1.5SMC100C	TVS	Vrwm=81V, Vbr=90..110V, Ipp=10.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYK	-	1.5SMC100CA	TVS	Vrwm=85.5V, Vbr=95..105V, Ipp=11A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYL	-	1.5SMC110C	TVS	Vrwm=89.2V, Vbr=99..121V, Ipp=9.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYM	-	1.5SMC110CA	TVS	Vrwm=94V, Vbr=105..116V, Ipp=9.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYN	-	1.5SMC120C	TVS	Vrwm=97.2V, Vbr=108..132V, Ipp=8.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYP	-	1.5SMC120CA	TVS	Vrwm=97.2V, Vbr=108..132V, Ipp=8.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYQ	-	1.5SMC130C	TVS	Vrwm=105V, Vbr=117..143V, Ipp=8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYR	-	1.5SMC130CA	TVS	Vrwm=111V, Vbr=124..137V, Ipp=8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYS	-	1.5SMC150C	TVS	Vrwm=121V, Vbr=135..165V, Ipp=7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYT	-	1.5SMC150CA	TVS	Vrwm=128V, Vbr=143..158V, Ipp=7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYU	-	1.5SMC160C	TVS	Vrwm=130V, Vbr=144..176V, Ipp=6.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYV	-	1.5SMC160CA	TVS	Vrwm=136V, Vbr=152..168V, Ipp=6.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYW	-	1.5SMC170C	TVS	Vrwm=138V, Vbr=153..187V, Ipp=6.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYX	-	1.5SMC170CA	TVS	Vrwm=145V, Vbr=162..179V, Ipp=6.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYY	-	1.5SMC180C	TVS	Vrwm=146V, Vbr=162..198V, Ipp=5.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JYZ	-	1.5SMC180CA	TVS	Vrwm=154V, Vbr=171..189V, Ipp=6.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZ	-	BZT52B13S	Zener diode	12.74..13.26V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tsc
JZ	-	CD214A-T51A	TVS	Vrwm=51V, Irsm=4.9A, 400W(1ms)	DO-214AC	1d	1a	Brn
JZ	-	MM3Z13VB	Zener diode	12.74..13.26V, Zzt=28Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
JZ	-	MM3Z13VBW	Zener diode	12.74..13.26V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tac
JZ	-	P4SMAJ51A	TVS	Vrwm=51V, 4.9A, 400W (1ms)	DO-214AC	1d	1a	Pjt
JZ	-	SMAJ51A	TVS	Vrwm=51V, Vbr=56.7..62.7V, 4.9A, 400W(1ms)	DO-214AC	1d	1m	Di
JZ	-	SMF51A	TVS	Vrwm=51V, Vbr=56.7..62.7V, Ipp=2.4A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
JZ	-	TCMM3Z13VB	Zener diode	13V±2%, Izt=5mA, Zzt=28Ω, 200mW	SOD-323FL	7d	1a	Tac
JZ	-	TV02W510-G	TVS	Vrwm=51V, Vbr=56.7..62.7V, Ipp=2.43A, 200W(1ms)	SOD-123	5d	2o	Cmc
JZA	-	1.5SMC6.8C	TVS	Vrwm=5.5V, Vbr=6.12..7.48V, Ipp=139A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZB	-	1.5SMC6.8CA	TVS	Vrwm=5.8V, Vbr=6.45..7.14 V, Ipp=143A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZC	-	1.5SMC7.5C	TVS	Vrwm=6.05V, Vbr=6.75..8.25V, Ipp=128A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZD	-	1.5SMC7.5CA	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=132A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZE	-	1.5SMC8.2C	TVS	Vrwm=6.63V, Vbr=7.38..9.02V, Ipp=120A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZF	-	1.5SMC8.2CA	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=124A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZG	-	1.5SMC9.1C	TVS	Vrwm=7.37V, Vbr=8.19..10V, Ipp=109A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZH	-	1.5SMC9.1CA	TVS	Vrwm=7.78V, Vbr=8.65..9.5V, Ipp=112A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZJ	-	1.5SMC10C	TVS	Vrwm=8.1V, Vbr=9..11V, Ipp=100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZK	-	1.5SMC10CA	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, Ipp=103A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZL	-	1.5SMC11C	TVS	Vrwm=8.92V, Vbr=9.9..12.1V, Ipp=93A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZM	-	1.5SMC11CA	TVS	Vrwm=9.4V, Vbr=10.5..11.6V, Ipp=96A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZN	-	1.5SMC12C	TVS	Vrwm=9.72V, Vbr=10.8..13.2V, Ipp=87A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZP	-	1.5SMC12CA	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, Ipp=90A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZQ	-	1.5SMC13C	TVS	Vrwm=10.5V, Vbr=11.7..14.3V, Ipp=79A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZR	-	1.5SMC13CA	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, Ipp=82A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZS	-	1.5SMC15C	TVS	Vrwm=12.1V, Vbr=13.5..16.5V, Ipp=68A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZT	-	1.5SMC15CA	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, Ipp=71A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZU	-	1.5SMC16C	TVS	Vrwm=12.9V, Vbr=14.4..17.6V, Ipp=64A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZV	-	1.5SMC16CA	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, Ipp=67A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZW	-	1.5SMC18C	TVS	Vrwm=14.5V, Vbr=16.2..19.8V, Ipp=56.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZX	-	1.5SMC18CA	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, Ipp=59.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZY	-	1.5SMC20C	TVS	Vrwm=16.2V, Vbr=18..22V, Ipp=51.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
JZZ	-	1.5SMC20CA	TVS	Vrwm=17.1V, Vbr=19..21V, Ipp=54A, 1500W(1ms), Bidir.	DO-214AB	1ba	1e	Pjt
K	-	BB142	C-diode	VCO, 6V, 20mA, 2.05/4.6pF(4V/1V, 1MHz), <0.5Ω	SOD-523	6d	1a	Phi
K	-	CDZ10B	Zener diode	10V±2.5%, Izt=40mA, 1W	VMN	7d	1s	Rhm
K	-	CH551H-30PT	Si-diode	SBD, 30V, 500mA, Vf<0.47V(500mA)	SC-79	5d	1a	Chm
K	-	HVU315	C-diode	VHF-tuning, 27.6/32.1pF(2V)	SOD-123	5d	1a	Ren

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
K	-	MAZS039	Zener diode	3.7..4.1V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
K	-	MM9D11V	Zener diode	10.45..11.55V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	1n	Wtr
K	-	NZ9F11VT	Zener diode	10.45..11.55V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	1n	Ons
K	-	NZ9F6V2ST	Zener diode	6.06..6.33V, Izt=5mA, Zzt=60Ω, 200mW	SOD-923	7d	2m	Ons
K	au	CH551S-30PT	Si-diode	SBD, 30V, 500mA, Vf<0.47V(500mA)	SC-79	8d	1a	Chm
K.0	-	MMSZ5255C-V-G	Zener diode	29V±2%, Izt=4.5mA, Zzt=44Ω, 500mW	SOD-123	5d	1kb	Vs
K.6	-	MMSZ5251C-V-G	Zener diode	22V±2%, Izt=5.6mA, Zzt=29Ω, 500mW	SOD-123	5d	1kb	Vs
K.7	-	MMSZ5252C-V-G	Zener diode	24V±2%, Izt=5.2mA, Zzt=33Ω, 500mW	SOD-123	5d	1kb	Vs
K.8	-	MMSZ5253C-V-G	Zener diode	25V±2%, Izt=5mA, Zzt=35Ω, 500mW	SOD-123	5d	1kb	Vs
K.9	-	MMSZ5254C-V-G	Zener diode	27V±2%, Izt=4.6mA, Zzt=41Ω, 500mW	SOD-123	5d	1kb	Vs
K^	-	MAZS0390H	Zener diode	3.87..4.1V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
K_	-	MAZS0390L	Zener diode	3.7..3.97V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
K0	-	BZD17C24P	Zener diode	22.8..25.6V, Zzt=7Ω, Izt=25mA, 800mW	SOD-123FL	7d	2u	Tsc
K0	-	BZD27C9V1P	TVS	Vbr=8.5V, Vcl=13.3V, 11.3A, 150W(1ms)	SOD-123FL	7d	1a	Lge
K0	-	MMPZ5264BPT	Zener diode	57.0..63.0V, Izt=2.1mA, Zzt=170Ω, 225mW	SOD-323	5d	1a	Chm
K0	-	MMSZ5255B-V-G	Zener diode	29V±5%, Izt=4.5mA, Zzt=44Ω, 500mW	SOD-123	5d	1kb	Vs
K010	-	STBK010	TVS	Vbr=9.00..11.0V, Vrwm=8.10V, 100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K010	-	STUK010	TVS	Vbr=9.0..11.0V, Vrwm=8.10V, 100A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K011	-	STBK011	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 93.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K011	-	STUK011	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 93.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K012	-	STBK012	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 87.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K012	-	STUK012	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 87.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K013	-	STBK013	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 79.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K013	-	STUK013	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 79.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K015	-	STBK015	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, 68.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K015	-	STUK015	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, 68.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K016	-	STBK016	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 64.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K016	-	STUK016	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 64.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K018	-	STBK018	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 56.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K018	-	STUK018	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 56.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K020	-	STBK020	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 51.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K020	-	STUK020	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 51.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K022	-	STBK022	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 47.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K022	-	STUK022	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 47.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K024	-	STBK024	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 43.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K024	-	STUK024	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 43.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K027	-	STBK027	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 38.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K027	-	STUK027	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 38.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K030	-	STBK030	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 34.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K030	-	STUK030	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 34.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K033	-	STBK033	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 31.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K033	-	STUK033	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 31.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K036	-	STBK036	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 29.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K036	-	STUK036	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 29.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K039	-	STBK039	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 26.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K039	-	STUK039	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 26.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K043	-	STBK043	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 24.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K043	-	STUK043	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 24.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K047	-	STBK047	TVS	Vbr=42.3..51.7V, Vrwm=38.1V, 22.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K047	-	STUK047	TVS	Vbr=42.3..51.7V, Vrwm=38.1V, 22.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K051	-	STBK051	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 20.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K051	-	STUK051	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 20.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K056	-	STBK056	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 18.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K056	-	STUK056	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 18.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K062	-	STBK062	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 16.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K062	-	STUK062	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 16.9A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K068	-	STBK068	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 15.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K068	-	STUK068	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 15.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K06I	-	STBK06I	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 139A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K06I	-	STUK06I	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 139A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K075	-	STBK075	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 13.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K075	-	STUK075	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 13.9A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K07F	-	STBK07F	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 128A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K07F	-	STUK07F	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 128A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K082	-	STBK082	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 12.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K082	-	STUK082	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 12.7A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K08C	-	STBK08C	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 120A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K08C	-	STUK08C	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 120A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K091	-	STBK091	TVS	Vbr=81.9..100V, Vrwm=73.7V, 11.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K091	-	STUK091	TVS	Vbr=81.9..100V, Vrwm=73.7V, 11.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
K09B	-	STBK09B	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 109A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K09B	-	STUK09B	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 109A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K0B0	-	STBK0B0	TVS	Vbr=90.0..110V, Vrwm=81.0V, 10.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K0B0	-	STUK0B0	TVS	Vbr=90.0..110V, Vrwm=81.0V, 10.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K0B1	-	STBK0B1	TVS	Vbr=99.0..121V, Vrwm=89.2V, 9.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K0B1	-	STUK0B1	TVS	Vbr=99.0..121V, Vrwm=89.2V, 9.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K0B2	-	STBK0B2	TVS	Vbr=108..132V, Vrwm=97.2V, 8.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K0B2	-	STUK0B2	TVS	Vbr=108..132V, Vrwm=97.2V, 8.7A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K0B3	-	STBK0B3	TVS	Vbr=117..143V, Vrwm=105V, 8.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K0B3	-	STUK0B3	TVS	Vbr=117..143V, Vrwm=105V, 8.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K0B5	-	STBK0B5	TVS	Vbr=135..165V, Vrwm=121V, 7.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K0B5	-	STUK0B5	TVS	Vbr=135..165V, Vrwm=121V, 7.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K0B6	-	STBK0B6	TVS	Vbr=144..176V, Vrwm=130V, 6.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K0B6	-	STUK0B6	TVS	Vbr=144..176V, Vrwm=130V, 6.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K0B7	-	STBK0B7	TVS	Vbr=153..187V, Vrwm=138V, 6.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K0B7	-	STUK0B7	TVS	Vbr=153..187V, Vrwm=138V, 6.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K0B8	-	STBK0B8	TVS	Vbr=162..198V, Vrwm=146V, 5.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K0B8	-	STUK0B8	TVS	Vbr=162..198V, Vrwm=146V, 5.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K0D0	-	STBK0D0	TVS	Vbr=180..220V, Vrwm=162V, 5.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K0D0	-	STUK0D0	TVS	Vbr=180..220V, Vrwm=162V, 5.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K0D2	-	STBK0D2	TVS	Vbr=198..242V, Vrwm=175V, 4.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K0D2	-	STUK0D2	TVS	Vbr=198..242V, Vrwm=175V, 4.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K0D5	-	STBK0D5	TVS	Vbr=225..275V, Vrwm=202V, 4.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K0D5	-	STUK0D5	TVS	Vbr=225..275V, Vrwm=202V, 4.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K0E0	-	STBK0E0	TVS	Vbr=270..330V, Vrwm=243V, 3.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K0E0	-	STUK0E0	TVS	Vbr=270..330V, Vrwm=243V, 3.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K0E5	-	STBK0E5	TVS	Vbr=315..385V, Vrwm=284V, 3.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K0E5	-	STUK0E5	TVS	Vbr=315..385V, Vrwm=284V, 3.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K0G0	-	STBK0G0	TVS	Vbr=360..440V, Vrwm=324V, 2.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K0G0	-	STUK0G0	TVS	Vbr=360..440V, Vrwm=324V, 2.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K0G4	-	STBK0G4	TVS	Vbr=396..484V, Vrwm=356V, 2.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K0G4	-	STUK0G4	TVS	Vbr=396..484V, Vrwm=356V, 2.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K1	-	BAP51-02	PIN-diode	RF, 50V, 50mA, 715mW, 0.35pF, 5.5Ω(10mA/100MHz)	SOD-523	6d	1a	Phi
K1	-	BAS21BPT	Si-diode	Sw, 250V, 200mA, Vf<<1.25V(200mA), 50ns	SOD-123	5d	1a	Chm
K1	-	BZD17C27P	Zener diode	25.1..28.9V, Zzt=7Ω, Izt=25mA, 800mW	SOD-123FL	7d	2u	Tsc
K1	-	BZD27C10P	TVS	Vbr=9.4V, Vcl=14.8V, 10.1A, 150W(1ms)	SOD-123FL	7d	1a	Lge
K1	-	BZX384-B2V4	Zener diode	2.4V±2.5%, Izt=5mA, Zzt=70Ω, 200mW	SOD-323	5d	1a	Nxp
K1	-	CMOZ43V	Zener diode	40.85..45.15V, Izt=5mA, Zzt=150Ω, 250mW	SOD-523	6d	1a	Cen
K1	-	CZRH5251B-G	Zener diode	20.9..23.1V, Zzt=29Ω, Izt=5.6mA, 150mW	SOD-523	6d	1a	Cmc
K1	-	CZRV5251B-G	Zener diode	20.9..23.1V, Zzt=29Ω, Izt=5.6mA, 200mW	SOD-323	5d	1a	Cmc
K1	-	CZRW5251B-G	Zener diode	20.90..23.10V, Zzt=29Ω, Izt=5.6mA, 500mW	SOD-123	5d	1a	Cmc
K1	-	LMSZ5251BT1G	Zener diode	20.9..23.1V, Izt=5.6mA, 500mW	SOD-123	5d	1d	Lrc
K1	-	MM3Z5231B	Zener diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOD-323FL	7d	1a	Bts
K1	-	MM3Z5231BH	Zener diode	4.85..5.36V, Izt=20mA, Zzt=17Ω, 300mW	SOD-323	5d	1a	Zow
K1	-	MM3Z5251B	Zener diode	20.90..23.10V, Izt=5.6mA, Zzt=29Ω, 200mW	SOD-323	5d	1a	Ext
K1	-	MMBZ5251BV	Zener diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 200mW	SOD-523	6d	1a	Pjt
K1	-	MMSZ5251B	Zener diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 500mW	SOD-123	5d	1d	Di
K1	-	MMSZ5251B-F	Zener diode	20.90 23.10V, Izt=5.6mA, 500mW	SOD-123F	7d	1a	Ttr
K1	-	MMSZ5251BS	Zener diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 200mW	SOD-323	5d	1d	Di
K1	-	MMSZ5251BWS	Zener diode	20.90..23.10V, Izt=5.6mA, 200mW	SOD-323F	7d	1a	Ttr
K1	-	OYD22VT1	Zener diode	20.8...23.3V, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1a	Ouy
K1	ag	MMSZ5251B	Zener diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 500mW	SOD-123	5d	1d	Di
K13	-	SSM0160SPT	Si-diode	SBR, 60V, 1A, Vf<0.55V(1A)	SOD-123	5d	1a	Chm
K14	-	SMD33PT	Si-diode	SBR, 30V, 3A, Vf<0.9V(3A)	SOD-123	5d	1a	Chm
K15	-	SMD22LLPT	Si-diode	SBR, 20V, 2A, Vf<0.27V(2A)	SOD-123	5d	1a	Chm
K16	-	SMD34PT	Si-diode	SBR, 40V, 3A, Vf<1V(3A)	SOD-123	5d	1a	Chm
K17	-	SSM0140SPT	Si-diode	SBR, 40V, 1A, Vf<0.46V(1A)	SOD-123	5d	1a	Chm
K18	-	SSM05150SPT	Si-diode	SBR, 150V, 500mA, Vf<0.8V(500mA)	SOD-123	5d	1a	Chm
K19	-	SSM02150SPT	Si-diode	SBD, 150V, 200mA, Vf<0.6V(200mA)	SOD-123	5d	1a	Chm
K2	-	BZD27C11P	TVS	Vbr=10.4V, Vcl=15.7V, 9.6A, 150W(1ms)	SOD-123FL	7d	1a	Lge
K2	-	BZX384-B2V7	Zener diode	2.7V±2.5%, Izt=5mA, Zzt=75Ω, 200mW	SOD-323	5d	1a	Nxp
K2	-	CZRH5252B-G	Zener diode	22.8..25.2V, Zzt=33Ω, Izt=5.2mA, 150mW	SOD-523	6d	1a	Cmc
K2	-	CZRV5252B-G	Zener diode	22.8..25.2V, Zzt=33Ω, Izt=5.2mA, 200mW	SOD-323	5d	1a	Cmc
K2	-	CZRW5252B-G	Zener diode	22.80..25.20V, Zzt=33Ω, Izt=5.2mA, 500mW	SOD-123	5d	1a	Cmc
K2	-	LMSZ5252BT1G	Zener diode	22.8..25.2V, Izt=5.2mA, 500mW	SOD-123	5d	1d	Lrc
K2	-	MM3Z5252B	Zener diode	22.80..25.20V, Izt=5.2mA, Zzt=33Ω, 200mW	SOD-323FL	7d	1a	Ext
K2	-	MM3Z5252BH	Zener diode	22.8..25.2V, Izt=5.2mA, Zzt=33Ω, 300mW	SOD-323	5d	1a	Zow
K2	-	MMBZ5252BV	Zener diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 200mW	SOD-523	6d	1a	Pjt
K2	-	MMSZ5252B	Zener diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 500mW	SOD-123	5d	1d	Di
K2	-	MMSZ5252B-F	Zener diode	22.80 25.20V, Izt=5.2mA, 500mW	SOD-123F	7d	1a	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
K2	-	MMSZ5252BS	Zener diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 200mW	SOD-323	5d	1d	Di
K2	-	MMSZ5252BWS	Zener diode	22.80..25.20V, Izt=5.2mA, 200mW	SOD-323F	7d	1a	Ttr
K2	-	OYD24VT1	Zener diode	22.8...25.6V, Izt=5mA, Zzt=60Ω, 500mW	SOD-123	5d	1a	Ouy
K2	-	RKS1500DKK	C-diode	TV-VCR-Tuners, 34V, C2=14.15..15.75pF, n>6.3, Rs<0.57Ω	SFP	6d	1a	Ren
K2	-	SSM5817SAGP	Si-diode	SBR, 20V, 1A, Vf<0.45V(1A)	SOD-123S	8d	1a	Chm
K2	-	SSM5817SGP	Si-diode	SBR, 20V, 1A, Vf<0.45V(1A)	SOD-123	5d	1a	Chm
K2	ag	MMSZ5252B	Zener diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 500mW	SOD-123	5d	1d	Di
K20	-	SSM05200SPT	Si-diode	SBR, 200V, 500mA, Vf<0.95V(500mA)	SOD-123	5d	1a	Chm
K21	-	SSM1200SPT	Si-diode	SBR, 200V, 1A, Vf<0.9V(1A)	SOD-123	5d	1a	Chm
K22	-	SSM0240SPT	Si-diode	SBD, 40V, 200mA, Vf<0.6V(200mA)	SOD-123	5d	1a	Chm
K3	-	BB145C	C-diode	VCO, 10V, 20mA, 2.55/6.4pF(4V/1V, 1MHz), <0.6Ω	SOD-523	6d	1a	Phi
K3	-	BZD17C33P	Zener diode	31..35V, Zzt=8Ω, Izt=25mA, 800mW	SOD-123FL	7d	2u	Tsc
K3	-	BZD27C12P	TVS	Vbr=11.4V, Vcl=17V, 8.8A, 150W(1ms)	SOD-123FL	7d	1a	Lge
K3	-	BZX384-B3V0	Zener diode	3.0V±2.5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Nxp
K3	-	LMSZ5253BT1G	Zener diode	23.75..26.25V, Izt=5mA, 500mW	SOD-123	5d	1d	Lrc
K3	-	MMSZ5253B-F	Zener diode	23.75 26.25V, Izt=5.0mA, 500mW	SOD-123F	7d	1a	Ttr
K3	-	MMSZ5253BWS	Zener diode	23.75..26.25V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
K3	-	SSM5818SAGP	Si-diode	SBR, 30V, 1A, Vf<0.55V(1A)	SOD-123S	8d	1a	Chm
K3	-	SSM5818SGP	Si-diode	SBR, 30V, 1A, Vf<0.55V(1A)	SOD-123	5d	1a	Chm
K4	-	BAP50-02	PIN-diode	RF, 50V, 50mA, 500mW, 0.3pF, 3Ω(10mA/100MHz)	SOD-523	6d	1a	Phi
K4	-	BZD17C36P	Zener diode	34..38V, Zzt=21Ω, Izt=10mA, 800mW	SOD-123FL	7d	2u	Tsc
K4	-	BZD27C13P	TVS	Vbr=12.4V, Vcl=18.9V, 7.9A, 150W(1ms)	SOD-123FL	7d	1a	Lge
K4	-	BZX384-B3V3	Zener diode	3.3V±2.5%, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	1a	Nxp
K4	-	CZRH5254B-G	Zener diode	25.65..28.35V, Zzt=41Ω, Izt=5mA, 150mW	SOD-523	6d	1a	Cmc
K4	-	CZRV5254B-G	Zener diode	25.65..28.35V, Zzt=41Ω, Izt=5mA, 200mW	SOD-323	5d	1a	Cmc
K4	-	CZRW5254B-G	Zener diode	25.65..28.35V, Zzt=41Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
K4	-	LMSZ5254BT1G	Zener diode	25.65..28.35V, Izt=4.6mA, 500mW	SOD-123	5d	1d	Lrc
K4	-	MM1Z5231B	Zener diode	4.85..5.36V, Izt=20mA, Zzt=17Ω, 500mW	SOD-323FL	7d	1a	Eic
K4	-	MM1Z5231BH	Zener diode	4.85..5.36V, Izt=20mA, Zzt=17Ω, 500mW	SOD-123	5d	1a	Zow
K4	-	MM3Z5254B	Zener diode	25.65..28.35V, Izt=4.6mA, Zzt=41Ω, 200mW	SOD-323	5d	1a	Ext
K4	-	MMBZ5254BV	Zener diode	27V±5%, Izt=5.0mA, Zzt=41Ω, 200mW	SOD-523	6d	1a	Pjt
K4	-	MMSZ5231B	Zener diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 500mW	SOD-123	5d	1a	Eic
K4	-	MMSZ5254B	Zener diode	27V±5%, Izt=4.6mA, Zzt=41Ω, 500mW	SOD-123	5d	1d	Di
K4	-	MMSZ5254B-F	Zener diode	25.65 28.35V, Izt=4.6mA, 500mW	SOD-123F	7d	1a	Ttr
K4	-	MMSZ5254BS	Zener diode	27V±5%, Izt=4.6mA, Zzt=41Ω, 200mW	SOD-323	5d	1d	Di
K4	-	MMSZ5254BWS	Zener diode	25.65..28.35V, Izt=4.6mA, 200mW	SOD-323F	7d	1a	Ttr
K4	-	OYD27VT1	Zener diode	25.1...28.9V, Izt=5mA, Zzt=70Ω, 500mW	SOD-123	5d	1a	Ouy
K4	-	SSM5819SAGP	Si-diode	SBR, 40V, 1A, Vf<0.6V(1A)	SOD-123S	8d	1a	Chm
K4	-	SSM5819SGP	Si-diode	SBR, 40V, 1A, Vf<0.6V(1A)	SOD-123	5d	1a	Chm
K4	ag	MMSZ5254B	Zener diode	27V±5%, Izt=4.6mA, Zzt=41Ω, 500mW	SOD-123	5d	1d	Di
K5	-	BAP63-02	PIN-diode	RF, 50V, 100mA, 715mW, 0.36pF, 1.17Ω(10mA/100MHz)	SOD-523	6d	1a	Phi
K5	-	BZD17C39P	Zener diode	37..41V, Zzt=21Ω, Izt=10mA, 800mW	SOD-123FL	7d	2u	Tsc
K5	-	BZD27C15P	TVS	Vbr=13.8V, Vcl=20.9V, 7.2A, 150W(1ms)	SOD-123FL	7d	1a	Lge
K5	-	BZX384-B3V6	Zener diode	3.6V±2.5%, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	1a	Nxp
K5	-	BZX584B15V	Zener diode	14.70..15.30V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523FL	7d	1a	Tac
K5	-	CZRH5255B-G	Zener diode	26.6..29.4V, Zzt=44Ω, Izt=4.5mA, 150mW	SOD-523	6d	1a	Cmc
K5	-	CZRV5255B-G	Zener diode	26.6..29.4V, Zzt=44Ω, Izt=4.5mA, 200mW	SOD-323	5d	1a	Cmc
K5	-	CZRW5255B-G	Zener diode	26.60..29.40V, Zzt=44Ω, Izt=4.5mA, 500mW	SOD-123	5d	1a	Cmc
K5	-	LMSZ5255BT1G	Zener diode	26.6..29.4V, Izt=4.5mA, 500mW	SOD-123	5d	1d	Lrc
K5	-	MM1Z5252B	Zener diode	22.80..25.20V, Izt=5.2mA, Zzt=33Ω, 500mW	SOD-323FL	7d	1a	Eic
K5	-	MM1Z5252BH	Zener diode	22.8..25.2V, Izt=5.2mA, Zzt=33Ω, 500mW	SOD-123	5d	1a	Zow
K5	-	MM3Z5255B	Zener diode	26.60..29.40V, Izt=4.5mA, Zzt=44Ω, 200mW	SOD-323	5d	1a	Ext
K5	-	MM5Z15VB	Zener diode	14.70..15.30V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523FL	7d	1a	Tac
K5	-	MMBZ5255BV	Zener diode	28V±5%, Izt=4.5mA, Zzt=44Ω, 200mW	SOD-523	6d	1a	Pjt
K5	-	MMSZ5252B	Zener diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 500mW	SOD-123	5d	1a	Eic
K5	-	MMSZ5255B	Zener diode	29V±5%, Izt=4.5mA, Zzt=44Ω, 500mW	SOD-123	5d	1d	Di
K5	-	MMSZ5255B-F	Zener diode	26.60 29.40V, Izt=4.5mA, 500mW	SOD-123F	7d	1a	Ttr
K5	-	MMSZ5255BS	Zener diode	29V±5%, Izt=4.5mA, Zzt=44Ω, 200mW	SOD-323	5d	1d	Di
K5	-	MMSZ5255BWS	Zener diode	26.60..29.40V, Izt=4.5mA, 200mW	SOD-323F	7d	1a	Ttr
K5	-	SMD22PT	Si-diode	SBR, 20V, 2A, Vf<0.65V(2A)	SOD-123	5d	1a	Chm
K5	ag	MMSZ5255B	Zener diode	29V±5%, Izt=4.5mA, Zzt=44Ω, 500mW	SOD-123	5d	1d	Di
K510	-	STBK510	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 103A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K510	-	STUK510	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 103A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K511	-	STBK511	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 96.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K511	-	STUK511	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 96.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K512	-	STBK512	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 90.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K512	-	STUK512	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 90.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K513	-	STBK513	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 82.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K513	-	STUK513	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 82.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K515	-	STBK515	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 71.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
K515	-	STUK515	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 71.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K516	-	STBK516	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 67.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K516	-	STUK516	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 67.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K518	-	STBK518	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 59.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K518	-	STUK518	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 59.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K520	-	STBK520	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 54.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K520	-	STUK520	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 54.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K522	-	STBK522	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 49.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K522	-	STUK522	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 49.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K524	-	STBK524	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 45.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K524	-	STUK524	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 45.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K527	-	STBK527	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 40.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K527	-	STUK527	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 40.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K530	-	STBK530	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 36.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K530	-	STUK530	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 36.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K533	-	STBK533	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 33.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K533	-	STUK533	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 33.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K536	-	STBK536	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 30.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K536	-	STUK536	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 30.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K539	-	STBK539	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 28.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K539	-	STUK539	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 28.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K543	-	STBK543	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 25.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K543	-	STUK543	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 25.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K547	-	STBK547	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 23.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K547	-	STUK547	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 23.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K551	-	STBK551	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 21.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K551	-	STUK551	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 21.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K556	-	STBK556	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 19.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K556	-	STUK556	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 19.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K562	-	STBK562	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 17.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K562	-	STUK562	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 17.7A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K568	-	STBK568	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 16.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K568	-	STUK568	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 16.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K56I	-	STBK56I	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 143A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K56I	-	STUK56I	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 143A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K575	-	STBK575	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K575	-	STUK575	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 14.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K57F	-	STBK57F	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 132A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K57F	-	STUK57F	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 132A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K582	-	STBK582	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K582	-	STUK582	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 13.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K58C	-	STBK58C	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 124A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K58C	-	STUK58C	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 124A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K591	-	STBK591	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 12.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K591	-	STUK591	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 12.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K59B	-	STBK59B	TVS	Vbr=8.65..9.6V, Vrwm=7.78V, 112A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K59B	-	STUK59B	TVS	Vbr=8.65..9.6V, Vrwm=7.78V, 112A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K5B0	-	STBK5B0	TVS	Vbr=95.0..105V, Vrwm=85.5V, 11.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K5B0	-	STUK5B0	TVS	Vbr=95.0..105V, Vrwm=85.5V, 11.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K5B1	-	STBK5B1	TVS	Vbr=105..116V, Vrwm=94V, 9.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K5B1	-	STUK5B1	TVS	Vbr=105..116V, Vrwm=94V, 9.9A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K5B2	-	STBK5B2	TVS	Vbr=114..126V, Vrwm=102V, 9.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K5B2	-	STUK5B2	TVS	Vbr=114..126V, Vrwm=102V, 9.1A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K5B3	-	STBK5B3	TVS	Vbr=124..137V, Vrwm=111V, 8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K5B3	-	STUK5B3	TVS	Vbr=124..137V, Vrwm=111V, 8.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K5B5	-	STBK5B5	TVS	Vbr=143..158V, Vrwm=128V, 7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K5B5	-	STUK5B5	TVS	Vbr=143..158V, Vrwm=128V, 7.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K5B6	-	STBK5B6	TVS	Vbr=152..168V, Vrwm=136V, 6.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K5B6	-	STUK5B6	TVS	Vbr=152..168V, Vrwm=136V, 6.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K5B7	-	STBK5B7	TVS	Vbr=162..179V, Vrwm=145V, 6.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K5B7	-	STUK5B7	TVS	Vbr=162..179V, Vrwm=145V, 6.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K5B8	-	STBK5B8	TVS	Vbr=171..189V, Vrwm=154V, 6.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K5B8	-	STUK5B8	TVS	Vbr=171..189V, Vrwm=154V, 6.1A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K5D0	-	STBK5D0	TVS	Vbr=190..210V, Vrwm=171V, 5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K5D0	-	STUK5D0	TVS	Vbr=190..210V, Vrwm=171V, 5.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K5D2	-	STBK5D2	TVS	Vbr=209..231V, Vrwm=185V, 4.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K5D2	-	STUK5D2	TVS	Vbr=209..231V, Vrwm=185V, 4.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K5D5	-	STBK5D5	TVS	Vbr=237..263V, Vrwm=214V, 4.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K5D5	-	STUK5D5	TVS	Vbr=237..263V, Vrwm=214V, 4.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K5E0	-	STBK5E0	TVS	Vbr=285..315V, Vrwm=256V, 3.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
K5E0	-	STUK5E0	TVS	Vbr=285..315V, Vrwm=256V, 3.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K5E5	-	STBK5E5	TVS	Vbr=332..368V, Vrwm=300V, 3.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K5E5	-	STUK5E5	TVS	Vbr=332..368V, Vrwm=300V, 3.1A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K5G0	-	STBK5G0	TVS	Vbr=380..420V, Vrwm=342V, 2.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K5G0	-	STUK5G0	TVS	Vbr=380..420V, Vrwm=342V, 2.7A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K5G4	-	STBK5G4	TVS	Vbr=418..462V, Vrwm=376V, 2.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
K5G4	-	STUK5G4	TVS	Vbr=418..462V, Vrwm=376V, 2.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
K6	-	BAP65-01	PIN-diode	RF, 30V, 100mA, 315mW, 0.61pF, 0.3Ω(100mA/100MHz)	SOD-723A	6d	1a	Phi
K6	-	BAP65-02	PIN-diode	RF, 30V, 100mA, 715mW, 0.61pF, 0.3Ω(100mA/100MHz)	SOD-523	6d	1a	Phi
K6	-	BZD17C43P	Zener diode	40..46V, Zzt=24Ω, Izt=10mA, 800mW	SOD-123FL	7d	2u	Tsc
K6	-	BZD27C16P	TVS	Vbr=15.3V, Vcl=22.9V, 6.6A, 150W(1ms)	SOD-123FL	7d	1a	Lge
K6	-	BZX384-B3V9	Zener diode	3.9V±2.5%, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	1a	Nxp
K6	-	MMSZ5251B-V-G	Zener diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 500mW	SOD-123	5d	1kb	Vs
K6	-	SMD23PT	Si-diode	SBR, 30V, 2A, Vf<0.68V(2A)	SOD-123	5d	1a	Chm
K7	-	BAP1321-02	PIN-diode	RF, 60V, 100mA, 715mW, 0.45pF, 1.3Ω(100mA/100MHz)	SOD-523	6d	1a	Phi
K7	-	BZD17C47P	Zener diode	44..50V, Zzt=24Ω, Izt=10mA, 800mW	SOD-123FL	7d	2u	Tsc
K7	-	BZD27C18P	TVS	Vbr=16.8V, Vcl=25.6V, 5.9A, 150W(1ms)	SOD-123FL	7d	1a	Lge
K7	-	BZX384-B4V3	Zener diode	4.3V±2.5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Nxp
K7	-	MMSZ5252B-V-G	Zener diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 500mW	SOD-123	5d	1kb	Vs
K7	-	SMD24PT	Si-diode	SBR, 40V, 2A, Vf<0.72V(2A)	SOD-123	5d	1a	Chm
K8	-	BAP70-02	PIN-diode	RF, 50V, 100mA, 415mW, 0.57pF, 1.9Ω(100mA/100MHz)	SOD-523	6d	1a	Nxp
K8	-	BZD17C51P	Zener diode	48..54V, Zzt=25Ω, Izt=10mA, 800mW	SOD-123FL	7d	2u	Tsc
K8	-	BZD27C20P	TVS	Vbr=18.8V, Vcl=28.4V, 5.3A, 150W(1ms)	SOD-123FL	7d	1a	Lge
K8	-	BZT52C6V8WT	Zener diode	6.46..7.14V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Ttr
K8	-	BZX384-B4V7	Zener diode	4.7V±2.5%, Izt=5mA, Zzt=50Ω, 200mW	SOD-323	5d	1a	Nxp
K8	-	MM5Z6V8	Zener diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Eic
K8	-	MM5Z6V8H	Zener diode	6.4..7.2V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Zow
K8	-	MMSZ5253B-V-G	Zener diode	25V±5%, Izt=5mA, Zzt=35Ω, 500mW	SOD-123	5d	1kb	Vs
K8	-	SSM551SLPT	Si-diode	SBR, 30V, 500mA, Vf<0.47V(500mA)	SOD-123	5d	1a	Chm
K9	-	BB199	C-diode	VCO, 20V, 100mA, 300mW, 13.8..42.5pF(2..0.5V)	SOD-523	6d	1a	Phi
K9	-	BZD27C22P	TVS	Vbr=20.8V, Vcl=31V, 4.8A, 150W(1ms)	SOD-123FL	7d	1a	Lge
K9	-	BZX384-B5V1	Zener diode	5.1V±2.5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Nxp
K9	-	MM1Z5249B	Zener diode	18.05..19.95V, Izt=6.6mA, Zzt=23Ω, 500mW	SOD-323FL	7d	1a	Eic
K9	-	MM1Z5249BH	Zener diode	18.05..19.95V, Izt=6.6mA, Zzt=23Ω, 500mW	SOD-123	5d	1a	Zow
K9	-	MMSZ5249B	Zener diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 500mW	SOD-123	5d	1a	Eic
K9	-	MMSZ5254B-V-G	Zener diode	27V±5%, Izt=4.6mA, Zzt=41Ω, 500mW	SOD-123	5d	1kb	Vs
K9	-	SSM05100SPT	Si-diode	SBR, 100V, 500mA, Vf<0.57V(500mA)	SOD-123	5d	1a	Chm
KA	-	PZU9.1B3	Zener diode	9.15..9.55V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
KA	-	S1KA	Si-diode	Rectifier, 800V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1k	Vs
KB	-	KDZ4.7B	Zener diode	4.7V±2.5%, 40mA, 1W	PMDU	7d	1s	Rhm
KB	-	PZU10B3	Zener diode	10.11..10.55V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
KC	-	PZU11B3	Zener diode	11.1..11.56V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
KD	-	P6SMB6V8	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 57.1A, 600W(1ms)	DO-214AA	1d	2j	Fag
KD	-	P6SMBJ5.0	TVS	Vrwm=5V, Vbr=6.4..7.55V, 62.5A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KD	-	PZU12B3	Zener diode	12.08..12.6V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
KD	-	SMBG5.0	TVS	Vrwm=5.0V, Vbr=6.40..7.55V, 62.5A, 600W(1ms)	DO-215AA	5d	1k	Vs
KD	-	SMBJ5.0	TVS	Vrwm=5.0V, Vbr=6.40..7.55V, 62.5A, 600W(1ms)	DO-214AA	1d	1k	Vs
KD	-	TV06B5V0K-G	TVS	Vrwm=5.0V, Vbr=6.40..7.30V, Ipp=62.50A, 600W(1ms)	DO-214AA	1d	2o	Cmc
KDJ	-	P6SMB6.8	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 57.1A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KDK	-	SMB6.8	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 55.6A, 600W(1ms)	DO-214AA	1d	1a	Lge
KDM	-	SMB6.8C	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 55.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KDP	-	TPSMB6.8	TVS	Vrwm=6.8V, Ipp=55.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
KE	-	1SMB5.0A	TVS	Vrwm=5V, 62.5A, 600W(1ms)	403A	3d	1s	Ons
KE	-	3.0SMB6V8A	Zener diode	6.40..7.25V, Zzt=2.0Ω, Izt=110mA, 3W	DO-214AA	1d	1b	Rul
KE	-	CD214B-T5.0A	TVS	Vrwm=5.0V, Irsm=65.2A, 600W(1ms)	DO-214AA	1d	1a	Brn
KE	-	P6SMB6V8A	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 57.1A, 600W(1ms)	DO-214AA	1d	2j	Fag
KE	-	P6SMBJ5.0A	TVS	Vrwm=5V, Vbr=6.4..7.55V, 65.2A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KE	-	PZU13B3	Zener diode	13.37..13.96V, Zzt=10Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
KE	-	SMA6J5.0A	TVS	Vbr=6.40..7.0V, Vrwm=5.0V, Ipp=65.2A, 600W(1ms)	DO-214AC	1d	1a	Mco
KE	-	SMBG5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms)	DO-215AA	5d	1k	Vs
KE	-	SMBJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms)	DO-214AA	1d	1m	Di
KE	-	SMBJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 65.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
KE	-	SMF5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 21.7A, 200W(1ms)	SOD-123FL	7d	1a	Eic
KE	-	SMF5.0CA	TVS	Vrwm=5.0V, Vbr=6.4..7.0V, 21.7A, 200W(10/1000μs), Bidir.	SOD-123FL	7ba	1j	Ers
KE	-	TV02W5V0B-G	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=21.7A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
KE	-	TV06B5V0J-G	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=65.22A, 600W(1ms)	DO-214AA	1d	2o	Cmc
KE7	-	SM6T6V8A	TVS	Vrwm=5.8V, Vbr=6.45..7.14V, 57A, 600W(1ms)	DO-214AA	1d	1k	Vs
KE7	-	SM6T6V8CA	TVS	Vrwm=5.8V, Vbr=6.45..7.14V, 57A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
KEJ	-	P6SMB6.8A	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 57.1A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KEK	-	SMB6.8A	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 57.1A, 600W(1ms)	DO-214AA	1d	1a	Lge

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
KEM	-	SMB6.8CA	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 57.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KEP	-	TPSMB6.8A	TVS	Vrwm=8.2V, Ipp=57.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
KEX	-	SMAT70A	TVS	Vrwm=70V, 40A, 400W(1ms)	DO-214AC	1d	1m	Di
KF	-	KDZ15FV	Zener diode	13.80..15.60V, Izt=5mA, Zzt=15Ω, 100mW	TFSC	7d	1a	Kec
KF	-	MAZD120	Zener diode	11.4..12.7V, Zzt=30Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
KF	-	P6SMB7V5	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 53.1A, 600W(1ms)	DO-214AA	1d	2j	Fag
KF	-	P6SMBJ6.0	TVS	Vrwm=6V, Vbr=6.67..8.65V, 52.6A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KF	-	PZU15B3	Zener diode	14.85..15.52V, Zzt=15Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
KF	-	SMBG6.0	TVS	Vrwm=6.0V, Vbr=6.67..8.45V, 52.6A, 600W(1ms)	DO-215AA	5d	1k	Vs
KF	-	SMBJ6.0	TVS	Vrwm=6.0V, Vbr=6.67..8.45V, 52.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
KF	-	TV06B6V0K-G	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, Ipp=52.63A, 600W(1ms)	DO-214AA	1d	2o	Cmc
KFJ	-	P6SMB7.5	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 53.1A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KFK	-	SMB7.5	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 51.3A, 600W(1ms)	DO-214AA	1d	1a	Lge
KFM	-	SMB7.5C	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 51.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KFP	-	TPSMB7.5	TVS	Vrwm=7.5V, Ipp=51.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
KG	-	1SMB6.0A	TVS	Vrwm=6V, 58.3A, 600W(1ms)	403A	3d	1s	Ons
KG	-	CD214B-T6.0A	TVS	Vrwm=6.0V, Irsm=58.3A, 600W(1ms)	DO-214AA	1d	1a	Brn
KG	-	P6SMB7V5A	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 53.1A, 600W(1ms)	DO-214AA	1d	2j	Fag
KG	-	P6SMBJ6.0A	TVS	Vrwm=6V, Vbr=6.67..8.65V, 58.3A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KG	-	PZU16B3	Zener diode	16.35..17.09V, Zzt=20Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
KG	-	SMA6J6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, Ipp=58.3A, 600W(1ms)	DO-214AC	1d	1a	Mco
KG	-	SMBG6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, 58.3A, 600W(1ms)	DO-215AA	5d	1k	Vs
KG	-	SMBJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, 58.3A, 600W(1ms)	DO-214AA	1d	1m	Di
KG	-	SMBJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.67V, 58.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
KG	-	SMF6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 19.4A, 200W(1ms)	SOD-123FL	7d	1a	Eic
KG	-	SMF6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 19.4A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
KG	-	TV02W6V0B-G	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=19.4A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
KG	-	TV06B6V0J-G	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=58.25A, 600W(1ms)	DO-214AA	1d	2o	Cmc
KGJ	-	P6SMB7.5A	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 53.1A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KGK	-	SMB7.5A	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 53.1A, 600W(1ms)	DO-214AA	1d	1a	Lge
KGM	-	SMB7.5CA	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 53.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KGP	-	TPSMB7.5A	TVS	Vrwm=7.5V, Ipp=53.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
KH	-	DDZ3V6B	Zener diode	3.6V±5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
KH	-	P6SMB8V2	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 49.6A, 600W(1ms)	DO-214AA	1d	2j	Fag
KH	-	P6SMBJ6.5	TVS	Vrwm=6.5V, Vbr=7.22..9.14V, 48.7A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KH	-	PZU18B3	Zener diode	18.21..19.03V, Zzt=20Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
KH	-	SMBG6.5	TVS	Vrwm=6.5V, Vbr=7.22..9.14V, 48.7A, 600W(1ms)	DO-215AA	5d	1k	Vs
KH	-	SMBJ6.5	TVS	Vrwm=6.5V, Vbr=7.22..9.14V, 48.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
KH	-	TV06B6V5K-G	TVS	Vrwm=6.50V, Vbr=7.22..8.82V, Ipp=48.78A, 600W(1ms)	DO-214AA	1d	2o	Cmc
KHJ	-	P6SMB8.2	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 49.6A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KHK	-	SMB8.2	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 48.0A, 600W(1ms)	DO-214AA	1d	1a	Lge
KHM	-	SMB8.2C	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 48.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KHP	-	TPSMB8.2	TVS	Vrwm=8.2V, Ipp=48A, 600W(1ms)	DO-214AA	1d	1k	Vs
KJ	-	DDZ3V9B	Zener diode	3.9V±5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
KJ	-	PZU20B3	Zener diode	20.21..21.08V, Zzt=20Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
KK	-	1SMB6.5A	TVS	Vrwm=6.5V, 53.6A, 600W(1ms)	403A	3d	1s	Ons
KK	-	3.0SMB7V5A	Zener diode	7.22..8.30V, Zzt=2.0Ω, Izt=100mA, 3W	DO-214AA	1d	1b	Rul
KK	-	BBY52-02W	C-diode	VCO-tuning, 7V, 20mA, 1.4..2.2pF(4..1V)	SCD-80	6d	1u	Inf
KK	-	CD214B-T6.5A	TVS	Vrwm=6.5V, Irsm=53.6A, 600W(1ms)	DO-214AA	1d	1a	Brn
KK	-	DDZ4V3B	Zener diode	4.3V±5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
KK	-	P6SMB8V2A	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 49.6A, 600W(1ms)	DO-214AA	1d	2j	Fag
KK	-	P6SMBJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..9.14V, 53.6A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KK	-	PZU22B3	Zener diode	22.23..23.17V, Zzt=25Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
KK	-	SMBG6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms)	DO-215AA	5d	1k	Vs
KK	-	SMBJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
KK	-	SMBJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..8.30V, 53.6A, 600W(1ms)	DO-214AA	1d	1m	Di
KK	-	SMF6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 17.9A, 200W(1ms)	SOD-123FL	7d	1a	Eic
KK	-	SMF6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 17.9A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
KK	-	TV02W6V5B-G	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=17.9A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
KK	-	TV06B6V5J-G	TVS	Vrwm=6.50V, Vbr=7.22..7.98V, Ipp=53.57A, 600W(1ms)	DO-214AA	1d	2o	Cmc
KK7	-	SM6T7V5A	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, 53A, 600W(1ms)	DO-214AA	1d	1k	Vs
KKJ	-	P6SMB8.2A	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 49.6A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KKK	-	SMB8.2A	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 49.6A, 600W(1ms)	DO-214AA	1d	1a	Lge
KKM	-	SMB8.2CA	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 49.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KKP	-	TPSMB8.2A	TVS	Vrwm=8.2V, Ipp=49.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
KL	-	DDZ4V7B	Zener diode	4.7V±5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
KL	-	P6SMB9V1	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 44.8A, 600W(1ms)	DO-214AA	1d	2j	Fag
KL	-	P6SMBJ7.0	TVS	Vrwm=7V, Vbr=7.78..9.86V, 45.1A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KL	-	PZU24B	Zener diode	22.93..25.57V, Zzt=30Ω(Izt=5mA), 310mW	SOD-323FL	7d	1a	Phi
KL	-	SMBG7.0	TVS	Vrwm=7.0V, Vbr=7.78..9.86V, 45.1A, 600W(1ms)	DO-215AA	5d	1k	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
KL	-	SMBJ7.0	TVS	Vrwm=7.0V, Vbr=7.78..9.86V, 45.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
KL	-	TV06B7V0K-G	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=45.11A, 600W(1ms)	DO-214AA	1d	2o	Cmc
KLJ	-	P6SMB9.1	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 44.8A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KLK	-	SMB9.1	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 44.0A, 600W(1ms)	DO-214AA	1d	1a	Lge
KLM	-	SMB9.1C	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 44.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KLP	-	TPSMB9.1	TVS	Vrwm=9.1V, Ipp=43.5A, 600W(1ms)	DO-214AA	1d	1k	Vs
KM	-	1SMB7.0A	TVS	Vrwm=7V, 50A, 600W(1ms)	403A	3d	1s	Ons
KM	-	3.0SMB8V2A	Zener diode	7.78..8.95V, Zzt=2.3Ω, Izt=91mA, 3W	DO-214AA	1d	1b	Rul
KM	-	CD214B-T7.0A	TVS	Vrwm=7.0V, Irsm=50.0A, 600W(1ms)	DO-214AA	1d	1a	Brn
KM	-	DDZ5V1B	Zener diode	5.1V±2.5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
KM	-	DDZ5V1BS	Zener diode	5.1V±2.5%, Izt=20mA, 200mW	SOD-323	5d	1d	Di
KM	-	P6SMB9V1A	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 44.8A, 600W(1ms)	DO-214AA	1d	2j	Fag
KM	-	P6SMBJ7.0A	TVS	Vrwm=7V, Vbr=7.78..9.86V, 50A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KM	-	SMBG7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, 50.0A, 600W(1ms)	DO-215AA	5d	1k	Vs
KM	-	SMBJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, 50.0A, 600W(1ms)	DO-214AA	1d	1m	Di
KM	-	SMBJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.95V, 50.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
KM	-	SMF7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, 16.7A, 200W(1ms)	SOD-123FL	7d	1a	Eic
KM	-	SMF7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, 16.7A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
KM	-	TV02W7V0B-G	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=16.7A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
KM	-	TV06B7V0J-G	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=50.0A, 600W(1ms)	DO-214AA	1d	2o	Cmc
KMJ	-	P6SMB10	TVS	Vrwm=10V, Vbr=9.5..10.5V, 41.4A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KMJ	-	P6SMB9.1A	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 44.8A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KMK	-	SMB9.1A	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 44.8A, 600W(1ms)	DO-214AA	1d	1a	Lge
KMM	-	SMB9.1CA	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 44.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KMP	-	TPSMB9.1A	TVS	Vrwm=9.1V, Ipp=44.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
KN	-	DDZ5V6B	Zener diode	5.6V±2.5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
KN	-	DDZ5V6BS	Zener diode	5.6V±2.5%, Izt=20mA, 200mW	SOD-323	5d	1d	Di
KN	-	P6SMB10	TVS	Vrwm=10V, Vbr=9.5..10.5V, 41.4A, 600W(1ms)	DO-214AA	1d	2j	Fag
KN	-	P6SMBJ7.5	TVS	Vrwm=7.5V, Vbr=8.33..10.67V, 42A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KN	-	SMBG7.5	TVS	Vrwm=7.5V, Vbr=8.33..10.67V, 42.0A, 600W(1ms)	DO-215AA	5d	1k	Vs
KN	-	SMBJ7.5	TVS	Vrwm=7.5V, Vbr=8.33..10.67V, 42.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
KN	-	TV06B7V5K-G	TVS	Vrwm=7.50V, Vbr=8.33..10.20V, Ipp=41.96A, 600W(1ms)	DO-214AA	1d	2o	Cmc
KNK	-	SMB10	TVS	Vbr=9.0..11.0V, Vrwm=8.10V, 40.0A, 600W(1ms)	DO-214AA	1d	1a	Lge
KNM	-	SMB10C	TVS	Vbr=9.0..11.0V, Vrwm=8.10V, 40.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KNP	-	TPSMB10	TVS	Vrwm=10V, Ipp=40A, 600W(1ms)	DO-214AA	1d	1k	Vs
KO	-	DDZ6V2B	Zener diode	6.2V±2.5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
KO	-	DDZ6V2BS	Zener diode	6.2V±2.5%, Izt=20mA, 200mW	SOD-323	5d	1d	Di
KP	-	1SMB7.5A	TVS	Vrwm=7.5V, 46.5A, 600W(1ms)	403A	3d	1s	Ons
KP	-	3.0SMB9V1A	Zener diode	8.33..9.58V, Zzt=2.5Ω, Izt=82mA, 3W	DO-214AA	1d	1b	Rul
KP	-	CD214B-T7.5A	TVS	Vrwm=7.5V, Irsm=46.5A, 600W(1ms)	DO-214AA	1d	1a	Brn
KP	-	CMDZ4L7	Zener diode	4.465..4.935V, Izt=0.5mA, Zzt=750Ω, 250mW	SOD-323	5d	1a	Cen
KP	-	DDZ6V8B	Zener diode	6.8V±2.5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
KP	-	KDZ15FVY	Zener diode	14.34..14.98V, Izt=5mA, Zzt=15Ω, 100mW	TFSC	7d	1a	Kec
KP	-	P6SMB10A	TVS	Vrwm=10V, Vbr=9.5..10.5V, 41.4A, 600W(1ms)	DO-214AA	1d	2j	Fag
KP	-	P6SMBJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..10.67V, 46.5A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KP	-	SMBG7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 46.5A, 600W(1ms)	DO-215AA	5d	1k	Vs
KP	-	SMBJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 46.5A, 600W(1ms)	DO-214AA	1d	1m	Di
KP	-	SMBJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.58V, 46.5A, 600W(1ms)	DO-214AA	1d	1k	Vs
KP	-	SMF7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 15.5A, 200W(1ms)	SOD-123FL	7d	1a	Eic
KP	-	SMF7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 15.5A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
KP	-	TV02W7V5B-G	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=15.5A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
KP	-	TV06B7V5J-G	TVS	Vrwm=7.50V, Vbr=8.33..9.21V, Ipp=46.51A, 600W(1ms)	DO-214AA	1d	2o	Cmc
KPJ	-	P6SMB10A	TVS	Vrwm=10V, Vbr=9.5..10.5V, 41.4A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KPK	-	SMB10A	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 41.4A, 600W(1ms)	DO-214AA	1d	1a	Lge
KPM	-	SMB10CA	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 41.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KPP	-	TPSMB10A	TVS	Vrwm=10V, Ipp=41.4A, 600W(1ms)	DO-214AA	1d	1k	Vs
KQ	-	DDZ7V5B	Zener diode	7.5V±2.5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
KQ	-	P6SMB11	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38.5A, 600W(1ms)	DO-214AA	1d	2j	Fag
KQ	-	P6SMBJ8.0	TVS	Vrwm=8V, Vbr=8.89..11.3V, 40A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KQ	-	SMBG8.0	TVS	Vrwm=8.0V, Vbr=8.89..11.3V, 40.0A, 600W(1ms)	DO-215AA	5d	1k	Vs
KQ	-	SMBJ8.0	TVS	Vrwm=8.0V, Vbr=8.89..11.3V, 40.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
KQ	-	TV06B8V0K-G	TVS	Vrwm=8.0V, Vbr=8.89..10.90V, Ipp=40.0A, 600W(1ms)	DO-214AA	1d	2o	Cmc
KQJ	-	P6SMB11	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38.5A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KQK	-	SMB11	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 37.0A, 600W(1ms)	DO-214AA	1d	1a	Lge
KQM	-	SMB11C	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 37.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KQP	-	TPSMB11	TVS	Vrwm=11V, Ipp=37A, 600W(1ms)	DO-214AA	1d	1k	Vs
KR	-	1SMB8.0A	TVS	Vrwm=8V, 44.1A, 600W(1ms)	403A	3d	1s	Ons
KR	-	3.0SMB10A	Zener diode	8.89..10.23V, Zzt=3.5Ω, Izt=75mA, 3W	DO-214AA	1d	1b	Rul
KR	-	CD214B-T8.0A	TVS	Vrwm=8.0V, Irsm=44.1A, 600W(1ms)	DO-214AA	1d	1a	Brn
KR	-	DDZ8V2B	Zener diode	8.2V±2.5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
KR	-	P6SMB11A	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38.5A, 600W(1ms)	DO-214AA	1d	2j	Fag
KR	-	P6SMBJ8.0A	TVS	Vrwm=8V, Vbr=8.89..11.3V, 44.1A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KR	-	SMBG8.0A	TVS	Vrwm=8.0V, Vbr=8.89..10.23V, 44.1A, 600W(1ms)	DO-215AA	5d	1k	Vs
KR	-	SMBJ8.0A	TVS	Vrwm=8.0V, Vbr=8.89..10.23V, 44.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
KR	-	SMBJ8.0A	TVS	Vrwm=8.0V, Vbr=8.89..10.23V, 44.1A, 600W(1ms)	DO-214AA	1d	1m	Di
KR	-	SMF8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 14.7A, 200W(1ms)	SOD-123FL	7d	1a	Eic
KR	-	SMF8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 14.7A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
KR	-	TV02W8V0B-G	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=14.7A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
KR	-	TV06B8V0J-G	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=44.12A, 600W(1ms)	DO-214AA	1d	2o	Cmc
KRJ	-	P6SMB11A	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38.5A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KRK	-	SMB11A	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 38.5A, 600W(1ms)	DO-214AA	1d	1a	Lge
KRM	-	SMB11CA	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 38.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KRP	-	TPSMB11A	TVS	Vrwm=11V, Ipp=38.5A, 600W(1ms)	DO-214AA	1d	1k	Vs
KS	-	DDZ9V1B	Zener diode	9.1V±2.5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
KS	-	P6SMB12	TVS	Vrwm=12V, Vbr=11.4..12.6V, 35.9A, 600W(1ms)	DO-214AA	1d	2j	Fag
KS	-	P6SMBJ8.5	TVS	Vrwm=8.5V, Vbr=9.44..1.32V, 37.7A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KS	-	SMBG8.5	TVS	Vrwm=8.5V, Vbr=9.44..11.92V, 37.7A, 600W(1ms)	DO-215AA	5d	1k	Vs
KS	-	SMBJ8.5	TVS	Vrwm=8.5V, Vbr=9.44..11.92V, 37.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
KS	-	TV06B8V5K-G	TVS	Vrwm=8.55V, Vbr=9.44..11.50V, Ipp=37.74A, 600W(1ms)	DO-214AA	1d	2o	Cmc
KSJ	-	P6SMB12	TVS	Vrwm=12V, Vbr=11.4..12.6V, 35.9A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KSK	-	SMB12	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 34.7A, 600W(1ms)	DO-214AA	1d	1a	Lge
KSM	-	SMB12C	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 34.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KSP	-	TPSMB12	TVS	Vrwm=12V, Ipp=34.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
KT	-	1SMB8.5A	TVS	Vrwm=8.5V, 41.7A, 600W(1ms)	403A	3d	1s	Ons
KT	-	CD214B-T8.5A	TVS	Vrwm=8.5V, Irsm=41.7A, 600W(1ms)	DO-214AA	1d	1a	Brn
KT	-	DDZ10B	Zener diode	10V±2.5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
KT	-	P6SMB12A	TVS	Vrwm=12V, Vbr=11.4..12.6V, 35.9A, 600W(1ms)	DO-214AA	1d	2j	Fag
KT	-	P6SMBJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..1.32V, 41.7A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KT	-	SMBG8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 41.7A, 600W(1ms)	DO-215AA	5d	1k	Vs
KT	-	SMBJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 41.7A, 600W(1ms)	DO-214AA	1d	1m	Di
KT	-	SMBJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.82V, 41.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
KT	-	SMF8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 13.9A, 200W(1ms)	SOD-123FL	7d	1a	Eic
KT	-	SMF8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.40V, 13.9A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
KT	-	TV02W8V5B-G	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, Ipp=13.9A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
KT	-	TV06B8V5J-G	TVS	Vrwm=8.55V, Vbr=9.44..10.40V, Ipp=41.67A, 600W(1ms)	DO-214AA	1d	2o	Cmc
KT7	-	SM6T10A	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, 41A, 600W(1ms)	DO-214AA	1d	1k	Vs
KTJ	-	P6SMB12A	TVS	Vrwm=12V, Vbr=11.4..12.6V, 35.9A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KTK	-	SMB12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 35.9A, 600W(1ms)	DO-214AA	1d	1a	Lge
KTM	-	SMB12CA	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 35.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KTP	-	TPSMB12A	TVS	Vrwm=12V, Ipp=35.9A, 600W(1ms)	DO-214AA	1d	1k	Vs
KU	-	DDZ11B	Zener diode	11V±2.5%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
KU	-	P6SMB13	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms)	DO-214AA	1d	2j	Fag
KU	-	P6SMBJ9.0	TVS	Vrwm=9V, Vbr=10.0..12.6V, 35.5A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KU	-	SMBG9.0	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms)	DO-215AA	5d	1k	Vs
KU	-	SMBJ9.0	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
KU	-	TV06B9V0K-G	TVS	Vrwm=9.0V, Vbr=10.0..12.20V, Ipp=35.50A, 600W(1ms)	DO-214AA	1d	2o	Cmc
KUJ	-	P6SMB13	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KUK	-	SMB13	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 31.6A, 600W(1ms)	DO-214AA	1d	1a	Lge
KUM	-	SMB13C	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 31.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KUP	-	TPSMB13	TVS	Vrwm=13V, Ipp=31.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
KV	-	1SMB9.0A	TVS	Vrwm=9V, 39A, 600W(1ms)	403A	3d	1s	Ons
KV	-	3.0SMB11A	Zener diode	10.0..11.50V, Zzt=4.0Ω, Izt=68mA, 3W	DO-214AA	1d	1b	Rul
KV	-	CD214B-T9.0A	TVS	Vrwm=9.0V, Irsm=39.0A, 600W(1ms)	DO-214AA	1d	1a	Brn
KV	-	DDZ12B	Zener diode	12V±2.5%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
KV	-	P6SMB13A	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms)	DO-214AA	1d	2j	Fag
KV	-	P6SMBJ9.0A	TVS	Vrwm=9V, Vbr=10.0..12.6V, 39A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KV	-	SMA6J9.0A	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, Ipp=39.0A, 600W(1ms)	DO-214AC	1d	1a	Mco
KV	-	SMBG9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms)	DO-215AA	5d	1k	Vs
KV	-	SMBJ9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
KV	-	SMBJ9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.5V, 39.0A, 600W(1ms)	DO-214AA	1d	1m	Di
KV	-	SMF9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, 13.0A, 200W(1ms)	SOD-123FL	7d	1a	Eic
KV	-	SMF9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, 13.0A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
KV	-	TV02W9V0B-G	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, Ipp=13.0A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
KV	-	TV06B9V0J-G	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=38.96A, 600W(1ms)	DO-214AA	1d	2o	Cmc
KVJ	-	P6SMB13A	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KVK	-	SMB13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 33.0A, 600W(1ms)	DO-214AA	1d	1a	Lge
KVM	-	SMB13CA	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 33.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KVP	-	TPSMB13A	TVS	Vrwm=13V, Ipp=33.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
KW	-	DDZ13B	Zener diode	13V±2.5%, 2Izt=10mA, 500mW	SOD-123	5d	1d	Di
KW	-	DDZ13BS	Zener diode	13V±2.5%, Izt=10mA, 200mW	SOD-323	5d	1d	Di

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
KW	-	P6SMB15	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28.3A, 600W(1ms)	DO-214AA	1d	2j	Fag
KW	-	P6SMBJ10	TVS	Vrwm=10V, Vbr=9..11V, 40A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KW	-	SMBG10	TVS	Vrwm=10V, Vbr=11.1..14.1V, 31.9A, 600W(1ms)	DO-215AA	5d	1k	Vs
KW	-	SMBJ10	TVS	Vrwm=10V, Vbr=11.1..14.1V, 31.9A, 600W(1ms)	DO-214AA	1d	1k	Vs
KW	-	TV06B100K-G	TVS	Vrwm=10.0V, Vbr=11.10..13.60V, Ipp=31.90A, 600W(1ms)	DO-214AA	1d	1a	Cmc
KWJ	-	P6SMB15	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28.3A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KWK	-	SMB15	TVS	Vbr=13.5..16.3V, Vrwm=12.1V, 27.3A, 600W(1ms)	DO-214AA	1d	1a	Lge
KWM	-	SMB15C	TVS	Vbr=13.5..16.3V, Vrwm=12.1V, 27.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KWP	-	TPSMB15	TVS	Vrwm=15V, Ipp=27.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
KX	-	1SMB10A	TVS	Vrwm=10V, 35.3A, 600W(1ms)	403A	3d	1s	Ons
KX	-	3.0SMB12A	Zener diode	11.0..12.80V, Zzt=4.5Ω, Izt=63mA, 3W	DO-214AA	1d	1b	Rul
KX	-	CD214B-T10A	TVS	Vrwm=10V, Irsm=35.3A, 600W(1ms)	DO-214AA	1d	1a	Brn
KX	-	DDZ14B	Zener diode	14V±2.5%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
KX	-	P6SMB15A	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28.3A, 600W(1ms)	DO-214AA	1d	2j	Fag
KX	-	P6SMBJ10A	TVS	Vrwm=10V, Vbr=9..11V, 40A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KX	-	SMA6J10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, Ipp=35.3A, 600W(1ms)	DO-214AC	1d	1a	Mco
KX	-	SMBG10A	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms)	DO-215AA	5d	1k	Vs
KX	-	SMBJ10A	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms)	DO-214AA	1d	1m	Di
KX	-	SMBJ10A	TVS	Vrwm=10V, Vbr=11.1..12.8V, 35.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
KX	-	SMF10A	TVS	Vrwm=10V, Vbr=11.1..12.3V, 11.8A, 200W(1ms)	SOD-123FL	7d	1a	Eic
KX	-	SMF10CA	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, 11.8A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
KX	-	TV02W100B-G	TVS	Vrwm=10V, Vbr=11.1..12.3V, Ipp=11.8A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
KX	-	TV06B100J-G	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=35.29A, 600W(1ms)	DO-214AA	1d	1a	Cmc
KX7	-	SM6T12A	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, 36A, 600W(1ms)	DO-214AA	1d	1k	Vs
KXC	-	1SMB10CA	TVS	Vrwm=10V, 135.3A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
KXC	-	SZ1SMB10CA	TVS	Vrwm=10V, 135.3A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
KXJ	-	P6SMB15A	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28.3A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KXK	-	SMB15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 28.3A, 600W(1ms)	DO-214AA	1d	1a	Lge
KXM	-	SMB15CA	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 28.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KXP	-	TPSMB15A	TVS	Vrwm=15V, Ipp=28.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
KY	-	DDZ16B	Zener diode	16V±2.5%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
KY	-	KDZ4.7VVY	Zener diode	4.55..4.75V, Izt=5mA, Zzt=120Ω, 100mW	VSC	7d	1a	Kec
KY	-	P6SMB16	TVS	Vrwm=16V, Vbr=15.2..16.8V, 26.7A, 600W(1ms)	DO-214AA	1d	2j	Fag
KY	-	P6SMBJ11	TVS	Vrwm=11V, Vbr=9.9..12.1V, 37A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KY	-	SMBG11	TVS	Vrwm=11V, Vbr=12.2..15.4V, 29.9A, 600W(1ms)	DO-215AA	5d	1k	Vs
KY	-	SMBJ11	TVS	Vrwm=11V, Vbr=12.2..15.4V, 29.9A, 600W(1ms)	DO-214AA	1d	1k	Vs
KY	-	TV06B110K-G	TVS	Vrwm=11.0V, Vbr=12.20..14.90V, Ipp=29.85A, 600W(1ms)	DO-214AA	1d	1a	Cmc
KYJ	-	P6SMB16	TVS	Vrwm=16V, Vbr=15.2..16.8V, 26.7A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KYK	-	SMB16	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 25.5A, 600W(1ms)	DO-214AA	1d	1a	Lge
KYM	-	SMB16C	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 25.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KYP	-	TPSMB16	TVS	Vrwm=16V, Ipp=25.5A, 600W(1ms)	DO-214AA	1d	1k	Vs
KZ	-	1SMB11A	TVS	Vrwm=11V, 33A, 600W(1ms)	403A	3d	1s	Ons
KZ	-	3.0SMB13A	Zener diode	12.20..14.0V, Zzt=4.5Ω, Izt=58mA, 3W	DO-214AA	1d	1b	Rul
KZ	-	BZT52B15S	Zener diode	14.70..15.30V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tsc
KZ	-	CD214B-T11A	TVS	Vrwm=11V, Irsm=33.0A, 600W(1ms)	DO-214AA	1d	1a	Brn
KZ	-	DDZ17	Zener diode	17V±10%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
KZ	-	MM3Z15VB	Zener diode	14.70..15.30V, Zzt=28Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
KZ	-	MM3Z15VBW	Zener diode	14.70..15.30V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tac
KZ	-	P6SMB16A	TVS	Vrwm=16V, Vbr=15.2..16.8V, 26.7A, 600W(1ms)	DO-214AA	1d	2j	Fag
KZ	-	P6SMBJ11A	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38A, 600W(1ms)	DO-214AA	1d	1a	Pjt
KZ	-	SMA6J11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, Ipp=33.0A, 600W(1ms)	DO-214AC	1d	1a	Mco
KZ	-	SMBG11A	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms)	DO-215AA	5d	1k	Vs
KZ	-	SMBJ11A	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms)	DO-214AA	1d	1m	Di
KZ	-	SMBJ11A	TVS	Vrwm=11V, Vbr=12.2..14.0V, 33.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
KZ	-	SMF11A	TVS	Vrwm=11V, Vbr=12.2..13.5V, 11.0A, 200W(1ms)	SOD-123FL	7d	1a	Eic
KZ	-	SMF11CA	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, 11.0A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
KZ	-	TCMM3Z15VB	Zener diode	15V±2%, Izt=5mA, Zzt=28Ω, 200mW	SOD-323FL	7d	1a	Tac
KZ	-	TV02W110B-G	TVS	Vrwm=11V, Vbr=12.2..13.5V, Ipp=11.0A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
KZ	-	TV06B110J-G	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=32.97A, 600W(1ms)	DO-214AA	1d	1a	Cmc
KZC	-	1SMB11CA	TVS	Vrwm=11V, 33A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
KZC	-	SZ1SMB11CA	TVS	Vrwm=11V, 33A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
KZJ	-	P6SMB16A	TVS	Vrwm=16V, Vbr=15.2..16.8V, 26.7A, 600W(1ms)	DO-214AA	1d	1u	Tsc
KZK	-	SMB16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 26.7A, 600W(1ms)	DO-214AA	1d	1a	Lge
KZM	-	SMB16CA	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 26.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
KZP	-	TPSMB16A	TVS	Vrwm=16V, Ipp=26.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
L	-	BAT62-03W	Si-diode	Schottky, 40V, 20mA; Vf<1.0V, Cd<0.6pF	SOD-323	5d	1a	Inf
L	-	BB143	C-diode	VCO, 6V, 20mA, 2.25/5.3pF(4V/1V, 1MHz), <0.5Ω	SOD-523	6d	1a	Phi
L	-	BBY53-02V	C-diode	VCO-tuning, 6V, 20mA, 3.1..5.8pF(3..1V)	SC-79	6d	1u	Sie
L	-	CDZ11B	Zener diode	11V±2.5%, Izt=20mA, 1W	VMN	7d	1s	Rhm
L	-	CH511H-30PT	Si-diode	SBD, 30V, 1A, Vf<0.47V(1A)	SOD-323	5d	1a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
L	-	HVU356	C-diode	VCO, BS-Tuner, 15V, 27.7/31.8pF(2V)	SOD-323	5d	1a	Ren
L	-	MA2S372	C-diode	UHF/VHF-tun, 32V, 20mA, 14.2/2.9pF(2/17V), 0.45Ω(470MHz)	SOD-523	6d	1a	Pan
L	-	MAZS043	Zener diode	4..4.6V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
L	-	MM9D12V	Zener diode	11.40..12.60V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	1n	Wtr
L	-	NZ9F12VT	Zener diode	11.40..12.60V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	1n	Ons
L	-	NZ9F6V8ST	Zener diode	6.65..6.93V, Izt=5mA, Zzt=40Ω, 200mW	SOD-923	7d	2m	Ons
L	au	MMSZ5261BPT	Zener diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 225mW	SOD-523	6d	1a	Chm
L-	-	MAZS0430M	Zener diode	4.17..4.4V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
L.	au	MMSZ5261SPT	Zener diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 225mW	SOD-523	6d	1a	Chm
L^	-	MAZS0430H	Zener diode	4.31..4.54V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
L_	-	MAZS0430L	Zener diode	4.03..4.26V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
L0	-	BZD17C62P	Zener diode	58..66V, Zzt=25Ω, Izt=10mA, 800mW	SOD-123FL	7d	2u	Tsc
L0	-	BZD27C24P	TVS	Vbr=22.8V, Vcl=33.8V, 4.4A, 150W(1ms)	SOD-123FL	7d	1a	Lge
L0	-	CMOZ2L2	Zener diode	2.09..2.31V, Izt=0.25mA, Zzt=1400Ω, 250mW	SOD-523	6d	1a	Cen
L0	-	MMPZ5268BPT	Zener diode	77.90..86.10V, Izt=1.5mA, Zzt=330Ω, 225mW	SOD-323	5d	1a	Chm
L1	-	BZD17C68P	Zener diode	64..72V, Zzt=25Ω, Izt=10mA, 800mW	SOD-123FL	7d	2u	Tsc
L1	-	BZD27C27P	TVS	Vbr=25.1V, Vcl=38.1V, 3.9A, 150W(1ms)	SOD-123FL	7d	1a	Lge
L1	-	BZX384-B5V6	Zener diode	5.6V±2.5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Nxp
L10	-	SMGJ10	TVS	Vrwm=10V, Vbr=11.1..13.6V, Ipp=159.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L10	-	SMLJ10	TVS	Vrwm=10V, Vbr=11.1..13.6V, Ipp=159.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L10	-	SSCD210	Si-diode	SBR, 100V, 2A, Vf<0.85V(2A)	1206	14d	1v	Zow
L100	-	SMGJ100	TVS	Vrwm=100V, Vbr=111..136V, Ipp=16.8A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L100	-	SMLJ100	TVS	Vrwm=100V, Vbr=111..136V, Ipp=16.8A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L100A	-	SMGJ100A	TVS	Vrwm=100V, Vbr=111..123V, Ipp=18.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L100A	-	SMLJ100A	TVS	Vrwm=100V, Vbr=111..123V, Ipp=18.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L100C	-	SMGJ100C	TVS	Vrwm=100V, Vbr=111..136V, Ipp=16.8A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L100C	-	SMLJ100C	TVS	Vrwm=100V, Vbr=111..136V, Ipp=16.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L100CA	-	SMGJ100CA	TVS	Vrwm=100V, Vbr=111..123V, Ipp=18.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L100CA	-	SMLJ100CA	TVS	Vrwm=100V, Vbr=111..123V, Ipp=18.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L10A	-	SMGJ10A	TVS	Vrwm=10V, Vbr=11.1..12.3V, Ipp=176.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L10A	-	SMLJ10A	TVS	Vrwm=10V, Vbr=11.1..12.3V, Ipp=176.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L10C	-	SMGJ10C	TVS	Vrwm=10V, Vbr=11.1..13.6V, Ipp=159.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L10C	-	SMLJ10C	TVS	Vrwm=10V, Vbr=11.1..13.6V, Ipp=159.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L10CA	-	SMGJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.3V, Ipp=176.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L10CA	-	SMLJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.3V, Ipp=176.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L11	-	SMGJ11	TVS	Vrwm=11V, Vbr=12.2..14.9V, Ipp=149.2A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L11	-	SMLJ11	TVS	Vrwm=11V, Vbr=12.2..14.9V, Ipp=149.2A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L110	-	SMGJ110	TVS	Vrwm=110V, Vbr=122..149V, Ipp=15.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L110	-	SMLJ110	TVS	Vrwm=110V, Vbr=122..149V, Ipp=15.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L110A	-	SMGJ110A	TVS	Vrwm=110V, Vbr=122..135V, Ipp=16.8A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L110A	-	SMLJ110A	TVS	Vrwm=110V, Vbr=122..135V, Ipp=16.8A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L110C	-	SMGJ110C	TVS	Vrwm=110V, Vbr=122..149V, Ipp=15.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L110C	-	SMLJ110C	TVS	Vrwm=110V, Vbr=122..149V, Ipp=15.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L110CA	-	SMGJ110CA	TVS	Vrwm=110V, Vbr=122..135V, Ipp=16.8A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L110CA	-	SMLJ110CA	TVS	Vrwm=110V, Vbr=122..135V, Ipp=16.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L11A	-	SMGJ11A	TVS	Vrwm=11V, Vbr=12.2..13.5V, Ipp=164.8A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L11A	-	SMLJ11A	TVS	Vrwm=11V, Vbr=12.2..13.5V, Ipp=164.8A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L11C	-	SMGJ11C	TVS	Vrwm=11V, Vbr=12.2..14.9V, Ipp=149.2A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L11C	-	SMLJ11C	TVS	Vrwm=11V, Vbr=12.2..14.9V, Ipp=149.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L11CA	-	SMGJ11CA	TVS	Vrwm=11V, Vbr=12.2..13.5V, Ipp=164.8A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L11CA	-	SMLJ11CA	TVS	Vrwm=11V, Vbr=12.2..13.5V, Ipp=164.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L12	-	FSS12L	Si-diode	SBR, 20V, 1A, Vf<0.45V(1A)	DO-214AC	7d	2n	Fag
L12	-	SMGJ12	TVS	Vrwm=12V, Vbr=13.3..16.3V, Ipp=136.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L12	-	SMLJ12	TVS	Vrwm=12V, Vbr=13.3..16.3V, Ipp=136.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L120	-	SMGJ120	TVS	Vrwm=120V, Vbr=133..163V, Ipp=14.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L120	-	SMLJ120	TVS	Vrwm=120V, Vbr=133..163V, Ipp=14.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L120A	-	SMGJ120A	TVS	Vrwm=120V, Vbr=133..147V, Ipp=15.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L120A	-	SMLJ120A	TVS	Vrwm=120V, Vbr=133..147V, Ipp=15.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L120C	-	SMGJ120C	TVS	Vrwm=120V, Vbr=133..163V, Ipp=14.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L120C	-	SMLJ120C	TVS	Vrwm=120V, Vbr=133..163V, Ipp=14.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L120CA	-	SMGJ120CA	TVS	Vrwm=120V, Vbr=133..147V, Ipp=15.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L120CA	-	SMLJ120CA	TVS	Vrwm=120V, Vbr=133..147V, Ipp=15.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L12A	-	SMGJ12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=150.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L12A	-	SMLJ12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=150.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L12C	-	SMGJ12C	TVS	Vrwm=12V, Vbr=13.3..16.3V, Ipp=136.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L12C	-	SMLJ12C	TVS	Vrwm=12V, Vbr=13.3..16.3V, Ipp=136.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L12CAA	-	SMGJ12CA	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=150.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L12CAA	-	SMLJ12CA	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=150.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L13	-	FSS13L	Si-diode	SBR, 30V, 1A, Vf<0.5V(1A)	DO-214AC	7d	2n	Fag
L13	-	SMGJ13	TVS	Vrwm=13V, Vbr=14.4..17.6V, Ipp=126.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
L13	-	SMLJ13	TVS	Vrwm=13V, Vbr=14.4..17.6V, Ipp=126.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L130	-	SMGJ130	TVS	Vrwm=130V, Vbr=144..176V, Ipp=13.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L130	-	SMLJ130	TVS	Vrwm=130V, Vbr=144..176V, Ipp=13.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L130A	-	SMGJ130A	TVS	Vrwm=130V, Vbr=144..159V, Ipp=14.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L130A	-	SMLJ130A	TVS	Vrwm=130V, Vbr=144..159V, Ipp=14.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L130C	-	SMGJ130C	TVS	Vrwm=130V, Vbr=144..176V, Ipp=13.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L130C	-	SMLJ130C	TVS	Vrwm=130V, Vbr=144..176V, Ipp=13.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L130CA	-	SMGJ130CA	TVS	Vrwm=130V, Vbr=144..159V, Ipp=14.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L130CA	-	SMLJ130CA	TVS	Vrwm=130V, Vbr=144..159V, Ipp=14.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L13A	-	SMGJ13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, Ipp=139.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L13A	-	SMLJ13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, Ipp=139.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L13C	-	SMGJ13C	TVS	Vrwm=13V, Vbr=14.4..17.6V, Ipp=126.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L13C	-	SMLJ13C	TVS	Vrwm=13V, Vbr=14.4..17.6V, Ipp=126.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L13CAA	-	SMGJ13CA	TVS	Vrwm=13V, Vbr=14.4..15.9V, Ipp=139.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L13CAA	-	SMLJ13CA	TVS	Vrwm=13V, Vbr=14.4..15.9V, Ipp=139.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L14	-	FSS14L	Si-diode	SBR, 40V, 1A, Vf<0.55V(1A)	DO-214AC	7d	2n	Fag
L14	-	SMGJ14	TVS	Vrwm=14V, Vbr=15.6..19.1V, Ipp=116.2A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L14	-	SMLJ14	TVS	Vrwm=14V, Vbr=15.6..19.1V, Ipp=116.2A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L14A	-	SMGJ14A	TVS	Vrwm=14V, Vbr=15.6..17.2V, Ipp=129.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L14A	-	SMLJ14A	TVS	Vrwm=14V, Vbr=15.6..17.2V, Ipp=129.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L14C	-	SMGJ14C	TVS	Vrwm=14V, Vbr=15.6..19.1V, Ipp=116.2A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L14C	-	SMLJ14C	TVS	Vrwm=14V, Vbr=15.6..19.1V, Ipp=116.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L14CA	-	SMGJ14CA	TVS	Vrwm=14V, Vbr=15.6..17.2V, Ipp=129.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L14CA	-	SMLJ14CA	TVS	Vrwm=14V, Vbr=15.6..17.2V, Ipp=129.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L15	-	SMGJ15	TVS	Vrwm=15V, Vbr=16.7..20.4V, Ipp=111.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L15	-	SMLJ15	TVS	Vrwm=15V, Vbr=16.7..20.4V, Ipp=111.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L150	-	SMGJ150	TVS	Vrwm=150V, Vbr=167..204V, Ipp=11.2A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L150	-	SMLJ150	TVS	Vrwm=150V, Vbr=167..204V, Ipp=11.2A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L150A	-	SMGJ150A	TVS	Vrwm=150V, Vbr=167..185V, Ipp=12.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L150A	-	SMLJ150A	TVS	Vrwm=150V, Vbr=167..185V, Ipp=12.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L150C	-	SMGJ150C	TVS	Vrwm=150V, Vbr=167..204V, Ipp=11.2A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L150C	-	SMLJ150C	TVS	Vrwm=150V, Vbr=167..204V, Ipp=11.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L150CA	-	SMGJ150CA	TVS	Vrwm=150V, Vbr=167..185V, Ipp=12.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L150CA	-	SMLJ150CA	TVS	Vrwm=150V, Vbr=167..185V, Ipp=12.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L15A	-	SMGJ15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, Ipp=123.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L15A	-	SMLJ15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, Ipp=123.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L15C	-	SMGJ15C	TVS	Vrwm=15V, Vbr=16.7..20.4V, Ipp=111.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L15C	-	SMLJ15C	TVS	Vrwm=15V, Vbr=16.7..20.4V, Ipp=111.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L15CA	-	SMGJ15CA	TVS	Vrwm=15V, Vbr=16.7..18.5V, Ipp=123.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L15CA	-	SMLJ15CA	TVS	Vrwm=15V, Vbr=16.7..18.5V, Ipp=123.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L16	-	FSS16L	Si-diode	SBR, 60V, 1A, Vf<0.7V(1A)	DO-214AC	7d	2n	Fag
L16	-	SMGJ16	TVS	Vrwm=16V, Vbr=17.8..21.8V, Ipp=104.2A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L16	-	SMLJ16	TVS	Vrwm=16V, Vbr=17.8..21.8V, Ipp=104.2A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L160	-	SMGJ160	TVS	Vrwm=160V, Vbr=178..218V, Ipp=10.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L160	-	SMLJ160	TVS	Vrwm=160V, Vbr=178..218V, Ipp=10.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L160A	-	SMGJ160A	TVS	Vrwm=160V, Vbr=178..197V, Ipp=11.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L160A	-	SMLJ160A	TVS	Vrwm=160V, Vbr=178..197V, Ipp=11.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L160C	-	SMGJ160C	TVS	Vrwm=160V, Vbr=178..218V, Ipp=10.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L160C	-	SMLJ160C	TVS	Vrwm=160V, Vbr=178..218V, Ipp=10.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L160CA	-	SMGJ160CA	TVS	Vrwm=160V, Vbr=178..197V, Ipp=11.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L160CA	-	SMLJ160CA	TVS	Vrwm=160V, Vbr=178..197V, Ipp=11.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L16A	-	SMGJ16A	TVS	Vrwm=16V, Vbr=17.8..19.7V, Ipp=115.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L16A	-	SMLJ16A	TVS	Vrwm=16V, Vbr=17.8..19.7V, Ipp=115.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L16C	-	SMGJ16C	TVS	Vrwm=16V, Vbr=17.8..21.8V, Ipp=104.2A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L16C	-	SMLJ16C	TVS	Vrwm=16V, Vbr=17.8..21.8V, Ipp=104.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L16CA	-	SMGJ16CA	TVS	Vrwm=16V, Vbr=17.8..19.7V, Ipp=115.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L16CA	-	SMLJ16CA	TVS	Vrwm=16V, Vbr=17.8..19.7V, Ipp=115.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L17	-	SMGJ17	TVS	Vrwm=17V, Vbr=18.9..23.1V, Ipp=98.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L17	-	SMLJ17	TVS	Vrwm=17V, Vbr=18.9..23.1V, Ipp=98.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L170	-	SMGJ170	TVS	Vrwm=170V, Vbr=189..231V, Ipp=9.8A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L170	-	SMLJ170	TVS	Vrwm=170V, Vbr=189..231V, Ipp=9.8A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L170A	-	SMGJ170A	TVS	Vrwm=170V, Vbr=189..209V, Ipp=11.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L170A	-	SMLJ170A	TVS	Vrwm=170V, Vbr=189..209V, Ipp=11.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L170C	-	SMGJ170C	TVS	Vrwm=170V, Vbr=189..231V, Ipp=9.8A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L170C	-	SMLJ170C	TVS	Vrwm=170V, Vbr=189..231V, Ipp=9.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L170CA	-	SMGJ170CA	TVS	Vrwm=170V, Vbr=189..209V, Ipp=11.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L170CA	-	SMLJ170CA	TVS	Vrwm=170V, Vbr=189..209V, Ipp=11.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L17A	-	SMGJ17A	TVS	Vrwm=17V, Vbr=18.9..20.9V, Ipp=106.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L17A	-	SMLJ17A	TVS	Vrwm=17V, Vbr=18.9..20.9V, Ipp=106.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L17C	-	SMGJ17C	TVS	Vrwm=17V, Vbr=18.9..23.1V, Ipp=98.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
L17C	-	SMLJ17C	TVS	Vrwm=17V, Vbr=18.9..23.1V, Ipp=98.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L17CA	-	SMGJ17CA	TVS	Vrwm=17V, Vbr=18.9..20.9V, Ipp=106.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L17CA	-	SMLJ17CA	TVS	Vrwm=17V, Vbr=18.9..20.9V, Ipp=106.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L18	-	SMGJ18	TVS	Vrwm=18V, Vbr=20.0..24.4V, Ipp=93.2A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L18	-	SMLJ18	TVS	Vrwm=18V, Vbr=20.0..24.4V, Ipp=93.2A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L18A	-	SMGJ18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, Ipp=102.8A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L18A	-	SMLJ18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, Ipp=102.8A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L18C	-	SMGJ18C	TVS	Vrwm=18V, Vbr=20.0..24.4V, Ipp=93.2A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L18C	-	SMLJ18C	TVS	Vrwm=18V, Vbr=20.0..24.4V, Ipp=93.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L18CA	-	SMGJ18CA	TVS	Vrwm=18V, Vbr=20.0..22.1V, Ipp=102.8A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L18CA	-	SMLJ18CA	TVS	Vrwm=18V, Vbr=20.0..22.1V, Ipp=102.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L2	-	B0520LW	Si-diode	SBR, 20V, 0.5A, Vf<0.385V(0.5A)	SOD-123	5d	1a	Cit
L2	-	BAT42W	Si-diode	SBR, 30V, 200mA, Vf<1V(200mA), 4pF, 5ns	SOD-123	5d	1a	Cen
L2	-	BB202	C-diode	VCO, FM-radio, 6V, 10mA, 11.2..33.5pF(2.3..0.2V)	SOD-523	6d	1a	Phi
L2	-	BZD17C75P	Zener diode	70..79V, Zzt=30Ω, Izt=10mA, 800mW	SOD-123FL	7d	2u	Tsc
L2	-	BZD27C30P	TVS	Vbr=28V, Vcl=42.2V, 3.6A, 150W(1ms)	SOD-123FL	7d	1a	Lge
L2	-	BZX384-B6V2	Zener diode	6.2V±2.5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	1a	Nxp
l2	-	CD1607-B120	Si-diode	SBR, 20V, 1A, Vf=0.5V(1A), 110pF	1607	10d	1a	Brn
L2	-	CD1607-B120L	Si-diode	SBR, 20V, 1A, Vf=0.38V(1A), 100pF	1607	10d	1a	Brn
L2	-	EDZ9.1B	Zener diode	8.85..9.23V, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Rhm
L2	-	EDZV9.1B	Zener diode	8.85..9.23V, Izt=5.0mA, Zzt=30Ω, 150mW	SOD-523	6d	2v	Rhm
L2	-	FDZ9.1EV	Zener diode	8.850..9.230V, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Fis
L2	-	FDZ9.1VT	Zener diode	8.850..9.230V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Fis
L2	-	LBZT52B9V1T1G	Zener diode	8.85..9.23V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
L2	-	LEDZ9.1BT1G	Zener diode	8.85..9.23V, Izt=5mA, 150mW	SOD-523	6d	1g	Lrc
L2	-	LUDZS9.1BT1G	Zener diode	8.85..9.23V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
L2	-	SSCD202	Si-diode	SBR, 20V, 2A, Vf<0.5V(2A)	1206	14d	1v	Zow
L2	-	TDZ9.1B	Zener diode	9.1V±2.5%, Izt=10mA, 500mW	TUMD2	7d	1s	Rhm
L2	-	UDZS9.1B	Zener diode	8.85..9.23V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Wtr
L2	-	UDZS9.1B	Zener diode	9.1V±2.5%, Izt=5mA, 200mW	SOD-323FL	7d	1s	Rhm
L2	-	UDZV9.1B	Zener diode	8.85..9.23V, Izt=5.0mA, Zzt=30Ω, 200mW	SOD-323	5d	2v	Rhm
L2	-	VDZS9.1B	Zener diode	9.1V±5%, 5mA, 100mW	VMD2	5d	1z	Rhm
L20	-	SMGJ20	TVS	Vrwm=20V, Vbr=22.2..27.1V, Ipp=83.8A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L20	-	SMLJ20	TVS	Vrwm=20V, Vbr=22.2..27.1V, Ipp=83.8A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L20A	-	SMGJ20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, Ipp=92.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L20A	-	SMLJ20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, Ipp=92.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L20C	-	SMGJ20C	TVS	Vrwm=20V, Vbr=22.2..27.1V, Ipp=83.8A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L20C	-	SMLJ20C	TVS	Vrwm=20V, Vbr=22.2..27.1V, Ipp=83.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L20CA	-	SMGJ20CA	TVS	Vrwm=20V, Vbr=22.2..24.5V, Ipp=92.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L20CA	-	SMLJ20CA	TVS	Vrwm=20V, Vbr=22.2..24.5V, Ipp=92.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L22	-	SMGJ22	TVS	Vrwm=22V, Vbr=24.4..29.8V, Ipp=76.2A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L22	-	SMLJ22	TVS	Vrwm=22V, Vbr=24.4..29.8V, Ipp=76.2A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L22A	-	SMGJ22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, Ipp=84.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L22A	-	SMLJ22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, Ipp=84.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L22C	-	SMGJ22C	TVS	Vrwm=22V, Vbr=24.4..29.8V, Ipp=76.2A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L22C	-	SMLJ22C	TVS	Vrwm=22V, Vbr=24.4..29.8V, Ipp=76.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L22CA	-	SMGJ22CA	TVS	Vrwm=22V, Vbr=24.4..26.9V, Ipp=84.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L22CA	-	SMLJ22CA	TVS	Vrwm=22V, Vbr=24.4..26.9V, Ipp=84.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L24	-	SMGJ24	TVS	Vrwm=24V, Vbr=26.7..32.6V, Ipp=69.8A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L24	-	SMLJ24	TVS	Vrwm=24V, Vbr=26.7..32.6V, Ipp=69.8A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L24A	-	SMGJ24A	TVS	Vrwm=24V, Vbr=26.7..29.5V, Ipp=77.2A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L24A	-	SMLJ24A	TVS	Vrwm=24V, Vbr=26.7..29.5V, Ipp=77.2A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L24C	-	SMGJ24C	TVS	Vrwm=24V, Vbr=26.7..32.6V, Ipp=69.8A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L24C	-	SMLJ24C	TVS	Vrwm=24V, Vbr=26.7..32.6V, Ipp=69.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L24CA	-	SMGJ24CA	TVS	Vrwm=24V, Vbr=26.7..29.5V, Ipp=77.2A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L24CA	-	SMLJ24CA	TVS	Vrwm=24V, Vbr=26.7..29.5V, Ipp=77.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L26	-	SMGJ26	TVS	Vrwm=26V, Vbr=28.9..35.3V, Ipp=64.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L26	-	SMLJ26	TVS	Vrwm=26V, Vbr=28.9..35.3V, Ipp=64.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L26A	-	SMGJ26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, Ipp=71.2A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L26A	-	SMLJ26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, Ipp=71.2A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L26C	-	SMGJ26C	TVS	Vrwm=26V, Vbr=28.9..35.3V, Ipp=64.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L26C	-	SMLJ26C	TVS	Vrwm=26V, Vbr=28.9..35.3V, Ipp=64.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L26CA	-	SMGJ26CA	TVS	Vrwm=26V, Vbr=28.9..31.9V, Ipp=71.2A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L26CA	-	SMLJ26CA	TVS	Vrwm=26V, Vbr=28.9..31.9V, Ipp=71.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L28	-	SMGJ28	TVS	Vrwm=28V, Vbr=31.1..38.0V, Ipp=60.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L28	-	SMLJ28	TVS	Vrwm=28V, Vbr=31.1..38.0V, Ipp=60.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L28A	-	SMGJ28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, Ipp=66.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L28A	-	SMLJ28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, Ipp=66.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L28C	-	SMGJ28C	TVS	Vrwm=28V, Vbr=31.1..38.0V, Ipp=60.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L28C	-	SMLJ28C	TVS	Vrwm=28V, Vbr=31.1..38.0V, Ipp=60.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
L28CA	-	SMGJ28CA	TVS	Vrwm=28V, Vbr=31.1..34.4V, Ipp=66.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L28CA	-	SMLJ28CA	TVS	Vrwm=28V, Vbr=31.1..34.4V, Ipp=66.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L2E	-	MBR120ESF	Si-diode	SBR, 20V, 1A, Vf=0.45V(1A)	SOD-123FL	7d	1g	Ons
L2L	-	MBR120LSF	Si-diode	SBR, 20V, 1A, Vf=0.41V(1A)	SOD-123FL	7d	1g	Ons
L3	-	BAT43W	Si-diode	SBR, 30V, 200mA, Vf<1V(200mA), 4pF, 5ns	SOD-123	5d	1a	Vs
L3	-	BZD27C33P	TVS	Vbr=31V, Vcl=46.2V, 3.2A, 150W(1ms)	SOD-123FL	7d	1a	Lge
L3	-	BZX384-B6V8	Zener diode	6.8V±2.5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	1a	Nxp
L30	-	SMGJ30	TVS	Vrwm=30V, Vbr=33.3..40.7V, Ipp=56.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L30	-	SMLJ30	TVS	Vrwm=30V, Vbr=33.3..40.7V, Ipp=56.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L30A	-	SMGJ30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, Ipp=62.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L30A	-	SMLJ30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, Ipp=62.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L30C	-	SMGJ30C	TVS	Vrwm=30V, Vbr=33.3..40.7V, Ipp=56.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L30C	-	SMLJ30C	TVS	Vrwm=30V, Vbr=33.3..40.7V, Ipp=56.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L30CA	-	SMGJ30CA	TVS	Vrwm=30V, Vbr=33.3..36.8V, Ipp=62.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L30CA	-	SMLJ30CA	TVS	Vrwm=30V, Vbr=33.3..36.8V, Ipp=62.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L32	-	FSSL32	Si-diode	SBR, 20V, 3A, Vf<0.41V(3A)	DO-214AB	1d	2j	Fag
L33	-	FSSL33	Si-diode	SBR, 30V, 3A, Vf<0.41V(3A)	DO-214AB	1d	2j	Fag
L33	-	SMGJ33	TVS	Vrwm=33V, Vbr=36.7..44.9V, Ipp=50.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L33	-	SMLJ33	TVS	Vrwm=33V, Vbr=36.7..44.9V, Ipp=50.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L33A	-	SMGJ33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, Ipp=56.2A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L33A	-	SMLJ33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, Ipp=56.2A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L33C	-	SMGJ33C	TVS	Vrwm=33V, Vbr=36.7..44.9V, Ipp=50.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L33C	-	SMLJ33C	TVS	Vrwm=33V, Vbr=36.7..44.9V, Ipp=50.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L33CA	-	SMGJ33CA	TVS	Vrwm=33V, Vbr=36.7..40.6V, Ipp=56.2A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L33CA	-	SMLJ33CA	TVS	Vrwm=33V, Vbr=36.7..40.6V, Ipp=56.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L34	-	FSSL34	Si-diode	SBR, 40V, 3A, Vf<0.41V(3A)	DO-214AB	1d	2j	Fag
L36	-	SMGJ36	TVS	Vrwm=36V, Vbr=40.0..48.9V, Ipp=46.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L36	-	SMLJ36	TVS	Vrwm=36V, Vbr=40.0..48.9V, Ipp=46.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L36A	-	SMGJ36A	TVS	Vrwm=36V, Vbr=40.0..44.2V, Ipp=51.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L36A	-	SMLJ36A	TVS	Vrwm=36V, Vbr=40.0..44.2V, Ipp=51.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L36C	-	SMGJ36C	TVS	Vrwm=36V, Vbr=40.0..48.9V, Ipp=46.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L36C	-	SMLJ36C	TVS	Vrwm=36V, Vbr=40.0..48.9V, Ipp=46.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L36CA	-	SMGJ36CA	TVS	Vrwm=36V, Vbr=40.0..44.2V, Ipp=51.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L36CA	-	SMLJ36CA	TVS	Vrwm=36V, Vbr=40.0..44.2V, Ipp=51.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L4	-	B0540LW	Si-diode	SBR, 40V, 0.5A, Vf<0.4V(0.5A)	SOD-123	5d	1a	Cit
L4	-	BAT254	Si-diode	SBR, U-Fast, 30V, 200mA, Vf<0.8V(100mA), <5ns	SOD-110	12d	1a	Phi
L4	-	BZD27C36P	TVS	Vbr=34V, Vcl=50.1V, 3A, 150W(1ms)	SOD-123FL	7d	1a	Lge
L4	-	BZX384-B7V5	Zener diode	7.5V±2.5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	1a	Nxp
l4	-	CD1607-B140	Si-diode	SBR, 40V, 1A, Vf=0.5V(1A), 110pF	1607	10d	1a	Brn
L4	-	CD1607-B140L	Si-diode	SBR, 40V, 1A, Vf=0.4V(1A), 110pF	1607	10d	1a	Brn
L4	-	SSCD204	Si-diode	SBR, 40V, 2A, Vf<0.5V(2A)	1206	14d	1v	Zow
L40	-	SMGJ40	TVS	Vrwm=40V, Vbr=44.4..54.3V, Ipp=42.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L40	-	SMLJ40	TVS	Vrwm=40V, Vbr=44.4..54.3V, Ipp=42.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L40A	-	SMGJ40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, Ipp=46.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L40A	-	SMLJ40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, Ipp=46.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L40C	-	SMGJ40C	TVS	Vrwm=40V, Vbr=44.4..54.3V, Ipp=42.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L40C	-	SMLJ40C	TVS	Vrwm=40V, Vbr=44.4..54.3V, Ipp=42.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L40CA	-	SMGJ40CA	TVS	Vrwm=40V, Vbr=44.4..49.1V, Ipp=46.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L40CA	-	SMLJ40CA	TVS	Vrwm=40V, Vbr=44.4..49.1V, Ipp=46.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L43	-	SMGJ43	TVS	Vrwm=43V, Vbr=47.8..58.4V, Ipp=39.2A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L43	-	SMLJ43	TVS	Vrwm=43V, Vbr=47.8..58.4V, Ipp=39.2A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L43A	-	SMGJ43A	TVS	Vrwm=43V, Vbr=47.8..52.8V, Ipp=43.2A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L43A	-	SMLJ43A	TVS	Vrwm=43V, Vbr=47.8..52.8V, Ipp=43.2A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L43C	-	SMGJ43C	TVS	Vrwm=43V, Vbr=47.8..58.4V, Ipp=39.2A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L43C	-	SMLJ43C	TVS	Vrwm=43V, Vbr=47.8..58.4V, Ipp=39.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L43CA	-	SMGJ43CA	TVS	Vrwm=43V, Vbr=47.8..52.8V, Ipp=43.2A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L43CA	-	SMLJ43CA	TVS	Vrwm=43V, Vbr=47.8..52.8V, Ipp=43.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L45	-	SMGJ45	TVS	Vrwm=45V, Vbr=50.0..61.1V, Ipp=37.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L45	-	SMLJ45	TVS	Vrwm=45V, Vbr=50.0..61.1V, Ipp=37.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L45A	-	SMGJ45A	TVS	Vrwm=45V, Vbr=50.0..55.3V, Ipp=41.2A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L45A	-	SMLJ45A	TVS	Vrwm=45V, Vbr=50.0..55.3V, Ipp=41.2A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L45C	-	SMGJ45C	TVS	Vrwm=45V, Vbr=50.0..61.1V, Ipp=37.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L45C	-	SMLJ45C	TVS	Vrwm=45V, Vbr=50.0..61.1V, Ipp=37.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L45CA	-	SMGJ45CA	TVS	Vrwm=45V, Vbr=50.0..55.3V, Ipp=41.2A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L45CA	-	SMLJ45CA	TVS	Vrwm=45V, Vbr=50.0..55.3V, Ipp=41.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L48	-	SMGJ48	TVS	Vrwm=48V, Vbr=53.3..65.1V, Ipp=35.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L48	-	SMLJ48	TVS	Vrwm=48V, Vbr=53.3..65.1V, Ipp=35.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L48A	-	SMGJ48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, Ipp=38.8A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L48A	-	SMLJ48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, Ipp=38.8A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L48C	-	SMGJ48C	TVS	Vrwm=48V, Vbr=53.3..65.1V, Ipp=35.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
L48C	-	SMLJ48C	TVS	Vrwm=48V, Vbr=53.3..65.1V, Ipp=35.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L48CA	-	SMGJ48CA	TVS	Vrwm=48V, Vbr=53.3..58.9V, Ipp=38.8A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L48CA	-	SMLJ48CA	TVS	Vrwm=48V, Vbr=53.3..58.9V, Ipp=38.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L4F	-	MBR140SF	Si-diode	SBR, 40V, 1A, Vf=0.51V(1A)	SOD-123FL	7d	1g	Ons
L5	-	BZD17C100P	Zener diode	94..106V, Zzt=60Ω, Izt=4mA, 800mW	SOD-123FL	7d	2u	Tsc
L5	-	BZD27C39P	TVS	Vbr=37V, Vcl=54.1V, 2.8A, 150W(1ms)	SOD-123FL	7d	1a	Lge
L5	-	BZX384-B8V2	Zener diode	8.2V±2.5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	1a	Nxp
L5	-	BZX584B16V	Zener diode	15.68..16.32V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523FL	7d	1a	Tac
L5	-	MM5Z16VB	Zener diode	15.68..16.32V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523FL	7d	1a	Tac
L5.0	-	SMGJ5.0	TVS	Vrwm=5.0V, Vbr=6.40..7.30V, Ipp=312.5A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L5.0	-	SMLJ5.0	TVS	Vrwm=5.0V, Vbr=6.40..7.30V, Ipp=312.5A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L5.0A	-	SMGJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=326.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L5.0A	-	SMLJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=326.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L5.0C	-	SMGJ5.0C	TVS	Vrwm=5.0V, Vbr=6.40..7.30V, Ipp=312.5A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L5.0C	-	SMLJ5.0C	TVS	Vrwm=5.0V, Vbr=6.40..7.30V, Ipp=312.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L5.0CA	-	SMGJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=326.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L5.0CA	-	SMLJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=326.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L51	-	SMGJ51	TVS	Vrwm=51V, Vbr=56.7..69.3V, Ipp=37.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L51	-	SMLJ51	TVS	Vrwm=51V, Vbr=56.7..69.3V, Ipp=37.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L51A	-	SMGJ51A	TVS	Vrwm=51V, Vbr=56.7..62.7V, Ipp=36.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L51A	-	SMLJ51A	TVS	Vrwm=51V, Vbr=56.7..62.7V, Ipp=36.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L51C	-	SMGJ51C	TVS	Vrwm=51V, Vbr=56.7..69.3V, Ipp=37.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L51C	-	SMLJ51C	TVS	Vrwm=51V, Vbr=56.7..69.3V, Ipp=37.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L51CA	-	SMGJ51CA	TVS	Vrwm=51V, Vbr=56.7..62.7V, Ipp=36.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L51CA	-	SMLJ51CA	TVS	Vrwm=51V, Vbr=56.7..62.7V, Ipp=36.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L54	-	SMGJ54	TVS	Vrwm=54V, Vbr=60.0..73.3V, Ipp=31.2A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L54	-	SMLJ54	TVS	Vrwm=54V, Vbr=60.0..73.3V, Ipp=31.2A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L54A	-	SMGJ54A	TVS	Vrwm=54V, Vbr=60.0..66.3V, Ipp=34.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L54A	-	SMLJ54A	TVS	Vrwm=54V, Vbr=60.0..66.3V, Ipp=34.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L54C	-	SMGJ54C	TVS	Vrwm=54V, Vbr=60.0..73.3V, Ipp=31.2A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L54C	-	SMLJ54C	TVS	Vrwm=54V, Vbr=60.0..73.3V, Ipp=31.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L54CA	-	SMGJ54CA	TVS	Vrwm=54V, Vbr=60.0..66.3V, Ipp=34.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L54CA	-	SMLJ54CA	TVS	Vrwm=54V, Vbr=60.0..66.3V, Ipp=34.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L55	-	SMGJ58	TVS	Vrwm=58V, Vbr=64.4..78.7V, Ipp=39.2A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L55	-	SMLJ58	TVS	Vrwm=58V, Vbr=64.4..78.7V, Ipp=39.2A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L55A	-	SMGJ58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, Ipp=32.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L55A	-	SMLJ58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, Ipp=32.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L58C	-	SMGJ58C	TVS	Vrwm=58V, Vbr=64.4..78.7V, Ipp=39.2A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L58C	-	SMLJ58C	TVS	Vrwm=58V, Vbr=64.4..78.7V, Ipp=39.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L58CA	-	SMGJ58CA	TVS	Vrwm=58V, Vbr=64.4..71.2V, Ipp=32.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L58CA	-	SMLJ58CA	TVS	Vrwm=58V, Vbr=64.4..71.2V, Ipp=32.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L6	-	BAT46W	Si-diode	SBD, 100V, 150mA, Vf<1V(250mA), 6pF	SOD-123	5d	1d	Tsc
L6	-	BZD27C43P	TVS	Vbr=40V, Vcl=60.7V, 2.5A, 150W(1ms)	SOD-123FL	7d	1a	Lge
L6	-	BZX384-B9V1	Zener diode	9.1V±2.5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	1a	Nxp
L6	-	FS1GE	Si-diode	Rectifier, 600V, 1A, Vf<1.1V(1A), 1µs	DO-214AC	1d	2j	Fag
L6	-	SSCD206	Si-diode	SBR, 60V, 2A, Vf<0.7V(2A)	1206	14d	1v	Zow
L6.0	-	SMGJ6.0	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, Ipp=263.2A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L6.0	-	SMLJ6.0	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, Ipp=263.2A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L6.0A	-	SMGJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=291.3A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L6.0A	-	SMLJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=291.3A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L6.0C	-	SMGJ6.0C	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, Ipp=263.2A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L6.0C	-	SMLJ6.0C	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, Ipp=263.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L6.0CA	-	SMGJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=291.3A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L6.0CA	-	SMLJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=291.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L6.5	-	SMGJ6.5	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, Ipp=243.9A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L6.5	-	SMLJ6.5	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, Ipp=243.9A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L6.5A	-	SMGJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=267.9A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L6.5A	-	SMLJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=267.9A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L6.5C	-	SMGJ6.5C	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, Ipp=243.9A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L6.5C	-	SMLJ6.5C	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, Ipp=243.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L6.5CA	-	SMGJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=267.9A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L6.5CA	-	SMLJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=267.9A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L60	-	SMGJ60	TVS	Vrwm=60V, Vbr=66.7..81.5V, Ipp=28.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L60	-	SMLJ60	TVS	Vrwm=60V, Vbr=66.7..81.5V, Ipp=28.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L60A	-	SMGJ60A	TVS	Vrwm=60V, Vbr=66.7..73.7V, Ipp=31.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L60A	-	SMLJ60A	TVS	Vrwm=60V, Vbr=66.7..73.7V, Ipp=31.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L60C	-	SMGJ60C	TVS	Vrwm=60V, Vbr=66.7..81.5V, Ipp=28.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L60C	-	SMLJ60C	TVS	Vrwm=60V, Vbr=66.7..81.5V, Ipp=28.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L60CA	-	SMGJ60CA	TVS	Vrwm=60V, Vbr=66.7..73.7V, Ipp=31.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L60CA	-	SMLJ60CA	TVS	Vrwm=60V, Vbr=66.7..73.7V, Ipp=31.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
L64	-	SMGJ64	TVS	Vrwm=64V, Vbr=71.1..86.9V, Ipp=26.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L64	-	SMLJ64	TVS	Vrwm=64V, Vbr=71.1..86.9V, Ipp=26.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L64A	-	SMGJ64A	TVS	Vrwm=64V, Vbr=71.1..78.6V, Ipp=29.2A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L64A	-	SMLJ64A	TVS	Vrwm=64V, Vbr=71.1..78.6V, Ipp=29.2A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L64C	-	SMGJ64C	TVS	Vrwm=64V, Vbr=71.1..86.9V, Ipp=26.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L64C	-	SMLJ64C	TVS	Vrwm=64V, Vbr=71.1..86.9V, Ipp=26.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L64CA	-	SMGJ64CA	TVS	Vrwm=64V, Vbr=71.1..78.6V, Ipp=29.2A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L64CA	-	SMLJ64CA	TVS	Vrwm=64V, Vbr=71.1..78.6V, Ipp=29.2A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L7	-	BAT17W	Si-diode	Schottky, UHF-Mix, 4V, 130mA, Vf<0.6V(10mA), Cd<0.75pF	SOD-123	5d	1a	Cen
L7	-	BZD17C120P	Zener diode	114..127V, Zzt=150Ω, Izt=4mA, 800mW	SOD-123FL	7d	2u	Tsc
L7	-	BZD27C47P	TVS	Vbr=44V, Vcl=65.5V, 2.3A, 150W(1ms)	SOD-123FL	7d	1a	Lge
L7	-	BZX384-B10	Zener diode	10V±2.5%, Izt=5mA, Zzt=8Ω, 200mW	SOD-323	5d	1a	Nxp
L7	-	FS1JE	Si-diode	Rectifier, 800V, 1A, Vf<1.1V(1A), 1µs	DO-214AC	1d	2j	Fag
L7.0	-	SMGJ7.0	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=225.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L7.0	-	SMLJ7.0	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=225.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L7.0A	-	SMGJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=250.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L7.0A	-	SMLJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=250.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L7.0C	-	SMGJ7.0C	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=225.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L7.0C	-	SMLJ7.0C	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=225.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L7.0CA	-	SMGJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=250.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L7.0CA	-	SMLJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=250.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L7.5	-	SMGJ7.5	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, Ipp=209.8A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L7.5	-	SMLJ7.5	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, Ipp=209.8A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L7.5A	-	SMGJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=232.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L7.5A	-	SMLJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=232.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L7.5C	-	SMGJ7.5C	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, Ipp=209.8A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L7.5C	-	SMLJ7.5C	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, Ipp=209.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L7.5CA	-	SMGJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=232.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L7.5CA	-	SMLJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=232.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L70	-	SMGJ70	TVS	Vrwm=70V, Vbr=77.8..95.1V, Ipp=24.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L70	-	SMLJ70	TVS	Vrwm=70V, Vbr=77.8..95.1V, Ipp=24.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L70A	-	SMGJ70A	TVS	Vrwm=70V, Vbr=77.8..86.0V, Ipp=26.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L70A	-	SMLJ70A	TVS	Vrwm=70V, Vbr=77.8..86.0V, Ipp=26.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L70C	-	SMGJ70C	TVS	Vrwm=70V, Vbr=77.8..95.1V, Ipp=24.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L70C	-	SMLJ70C	TVS	Vrwm=70V, Vbr=77.8..95.1V, Ipp=24.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L70CA	-	SMGJ70CA	TVS	Vrwm=70V, Vbr=77.8..86.0V, Ipp=6.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L70CA	-	SMLJ70CA	TVS	Vrwm=70V, Vbr=77.8..86.0V, Ipp=6.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L75	-	SMGJ75	TVS	Vrwm=75V, Vbr=83.3..102V, Ipp=22.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L75	-	SMLJ75	TVS	Vrwm=75V, Vbr=83.3..102V, Ipp=22.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L75A	-	SMGJ75A	TVS	Vrwm=75V, Vbr=83.3..92.1V, Ipp=24.8A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L75A	-	SMLJ75A	TVS	Vrwm=75V, Vbr=83.3..92.1V, Ipp=24.8A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L75C	-	SMGJ75C	TVS	Vrwm=75V, Vbr=83.3..102V, Ipp=22.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L75C	-	SMLJ75C	TVS	Vrwm=75V, Vbr=83.3..102V, Ipp=22.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L75CA	-	SMGJ75CA	TVS	Vrwm=75V, Vbr=83.3..92.1V, Ipp=24.8A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L75CA	-	SMLJ75CA	TVS	Vrwm=75V, Vbr=83.3..92.1V, Ipp=24.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L78	-	SMGJ78	TVS	Vrwm=78V, Vbr=86.7..106V, Ipp=21.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L78	-	SMLJ78	TVS	Vrwm=78V, Vbr=86.7..106V, Ipp=21.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L78A	-	SMGJ78A	TVS	Vrwm=78V, Vbr=86.7..95.8V, Ipp=22.8A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L78A	-	SMLJ78A	TVS	Vrwm=78V, Vbr=86.7..95.8V, Ipp=22.8A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L78C	-	SMGJ78C	TVS	Vrwm=78V, Vbr=86.7..106V, Ipp=21.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L78C	-	SMLJ78C	TVS	Vrwm=78V, Vbr=86.7..106V, Ipp=21.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L78CA	-	SMGJ78CA	TVS	Vrwm=78V, Vbr=86.7..95.8V, Ipp=22.8A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L78CA	-	SMLJ78CA	TVS	Vrwm=78V, Vbr=86.7..95.8V, Ipp=22.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L8	-	BA792	PIN-diode	VHF, TV-Band-Sw, 35V, 100mA, 1.1pF	SOD-110	12d	1a	Phi
L8	-	BZD27C51P	TVS	Vbr=48V, Vcl=70.8V, 2.1A, 150W(1ms)	SOD-123FL	7d	1a	Lge
L8	-	BZT52C7V5WT	Zener diode	7.13..7.88V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Ttr
L8	-	BZX384-B11	Zener diode	11V±2.5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Nxp
L8	-	CMOZ1L8	Zener diode	1.71..1.89V, Izt=0.25mA, Zzt=1400Ω, 250mW	SOD-523	6d	1a	Cen
L8	-	FS1ME	Si-diode	Rectifier, 1000V, 1A, Vf<1.1V(1A), 1µs	DO-214AC	1d	2j	Fag
L8	-	MM5Z7V5	Zener diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Eic
L8	-	MM5Z7V5H	Zener diode	7..7.9V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Zow
L8.0	-	SMGJ8.0	TVS	Vrwm=8.0V, Vbr=8.89..10.9V, Ipp=200.0A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L8.0	-	SMLJ8.0	TVS	Vrwm=8.0V, Vbr=8.89..10.9V, Ipp=200.0A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L8.0A	-	SMGJ8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=220.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L8.0A	-	SMLJ8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=220.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L8.0C	-	SMGJ8.0C	TVS	Vrwm=8.0V, Vbr=8.89..10.9V, Ipp=200.0A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L8.0C	-	SMLJ8.0C	TVS	Vrwm=8.0V, Vbr=8.89..10.9V, Ipp=200.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L8.0CA	-	SMGJ8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=220.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L8.0CA	-	SMLJ8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=220.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L8.5	-	SMGJ8.5	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, Ipp=188.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
L8.5	-	SMLJ8.5	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, Ipp=188.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L8.5A	-	SMGJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, Ipp=208.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L8.5A	-	SMLJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, Ipp=208.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L8.5C	-	SMGJ8.5C	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, Ipp=188.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L8.5C	-	SMLJ8.5C	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, Ipp=188.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L8.5CA	-	SMGJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, Ipp=208.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L8.5CA	-	SMLJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, Ipp=208.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L85	-	SMGJ85	TVS	Vrwm=85V, Vbr=94.4..115V, Ipp=19.8A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L85	-	SMLJ85	TVS	Vrwm=85V, Vbr=94.4..115V, Ipp=19.8A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L85A	-	SMGJ85A	TVS	Vrwm=85V, Vbr=94.4..104V, Ipp=20.8A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L85A	-	SMLJ85A	TVS	Vrwm=85V, Vbr=94.4..104V, Ipp=20.8A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L85C	-	SMGJ85C	TVS	Vrwm=85V, Vbr=94.4..115V, Ipp=19.8A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L85C	-	SMLJ85C	TVS	Vrwm=85V, Vbr=94.4..115V, Ipp=19.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L85CA	-	SMGJ85CA	TVS	Vrwm=85V, Vbr=94.4..104V, Ipp=20.8A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L85CA	-	SMLJ85CA	TVS	Vrwm=85V, Vbr=94.4..104V, Ipp=20.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L9	-	BAT54WS	Si-diode	SBR, 30V, 200mA, Vf<0.52V(100mA), <5ns	SOD-323	1d	2a	Di
L9	-	BAT54WT	Si-diode	SBR, 30V, 200mA, Vf<0.52V(100mA), <5ns	SOD-523	8d	2a	Di
L9	-	BZD27C56P	TVS	Vbr=52V, Vcl=78.6V, 1.9A, 150W(1ms)	SOD-123FL	7d	1a	Lge
L9	-	BZX384-B12	Zener diode	12V±2.5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Nxp
L9	-	CMOZ2L0	Zener diode	1.90..2.10V, Izt=0.25mA, Zzt=1400Ω, 250mW	SOD-523	6d	1a	Cen
L9.0	-	SMGJ9.0	TVS	Vrwm=9.0V, Vbr=10.0..12.2V, Ipp=177.4A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L9.0	-	SMLJ9.01	TVS	Vrwm=9.0V, Vbr=10.0..12.2V, Ipp=177.4A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L9.0A	-	SMGJ9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, Ipp=194.8A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L9.0A	-	SMLJ9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, Ipp=194.8A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L9.0C	-	SMGJ9.0C	TVS	Vrwm=9.0V, Vbr=10.0..12.2V, Ipp=177.4A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L9.0C	-	SMLJ9.0C	TVS	Vrwm=9.0V, Vbr=10.0..12.2V, Ipp=177.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L9.0CA	-	SMGJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, Ipp=194.8A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L9.0CA	-	SMLJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, Ipp=194.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L90C	-	SMGJ90C	TVS	Vrwm=90V, Vbr=100..122V, Ipp=18.8A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L90C	-	SMLJ90C	TVS	Vrwm=90V, Vbr=100..122V, Ipp=18.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L90CA	-	SMGJ90CA	TVS	Vrwm=90V, Vbr=100..111V, Ipp=20.6A, 3000W(1ms), Bidir.	DO-215AB	5ba	1j	Msc
L90CA	-	SMLJ90CA	TVS	Vrwm=90V, Vbr=100..111V, Ipp=20.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1j	Msc
L92	-	SMGJ90	TVS	Vrwm=90V, Vbr=100..122V, Ipp=18.8A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L92	-	SMLJ90	TVS	Vrwm=90V, Vbr=100..122V, Ipp=18.8A, 3000W(1ms)	DO-214AB	1d	1a	Msc
L92A	-	SMGJ90A	TVS	Vrwm=90V, Vbr=100..111V, Ipp=20.6A, 3000W(1ms)	DO-215AB	5d	1a	Msc
L92A	-	SMLJ90A	TVS	Vrwm=90V, Vbr=100..111V, Ipp=20.6A, 3000W(1ms)	DO-214AB	1d	1a	Msc
LA	-	B0520LW-S	Si-diode	SBR, 20V, 0.5A, Vf<0.385V(0.5A)	SOD-123S	7d	1a	Cit
LA	-	B0520LW-ST	Si-diode	SBR, 20V, 0.5A, Vf<0.385V(0.5A)	SOD-123ST	7d	1a	Cit
LA	-	SC902-2	Si-diode	Rectifier, Sw, 200V, 1A, Vf<1.05V(1A)	SC	1d	2q	Fji
LA	-	SK42C	Si-diode	SBR, 20V, 4A, Vf<0.5V(4A)	DO-214AB	1d	2j	Fag
LB	-	KDZ5.1B	Zener diode	5.1V±2.5%, 40mA, 1W	PMDU	7d	1s	Rhm
LB	-	SK44C	Si-diode	SBR, 40V, 4A, Vf<0.5V(4A)	DO-214AB	1d	2j	Fag
LB	-	SMA6J19A	TVS	Vbr=21.1..23.3V, Vrwm=19V, Ipp=19.5A, 600W(1ms)	DO-214AC	1d	1a	Mco
LB	-	SMF19CA	TVS	Vrwm=19.0V, Vbr=21.10..23.30V, 6.54A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
LB	-	TV02W190B-G	TVS	Vrwm=19V, Vbr=21.1..23.3V, Ipp=6.54A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
LC	-	B0540LW-S	Si-diode	SBR, 40V, 0.5A, Vf<0.4V(0.5A)	SOD-123S	7d	1a	Cit
LC	-	B0540LW-ST	Si-diode	SBR, 40V, 0.5A, Vf<0.4V(0.5A)	SOD-123ST	7d	1a	Cit
LC	-	SK46C	Si-diode	SBR, 60V, 4A, Vf<0.75V(4A)	DO-214AB	1d	2j	Fag
LC10	-	SMCJLCE10	TVS	Vrwm=10V, Vbr=11.1..13.6V, 80A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC100	-	SMCJLCE100	TVS	Vrwm=100V, Vbr=111..136V, 8.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC100A	-	SMCJLCE100A	TVS	Vrwm=100V, Vbr=111..123V, 9.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC100C	-	SMCJLCE100C	TVS	Vrwm=100V, Vbr=111..136V, 8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC100CA	-	SMCJLCE100CA	TVS	Vrwm=100V, Vbr=111..123V, 9.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC10A	-	SMCJLCE10A	TVS	Vrwm=10V, Vbr=11.1..12.3V, 88A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC10C	-	SMCJLCE10C	TVS	Vrwm=10V, Vbr=11.1..13.6V, 80A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC10CA	-	SMCJLCE10CA	TVS	Vrwm=10V, Vbr=11.1..12.3V, 88A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC11	-	SMCJLCE11	TVS	Vrwm=11V, Vbr=12.2..14.9V, 74A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC110	-	SMCJLCE110	TVS	Vrwm=110V, Vbr=122..149V, 7.7A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC110A	-	SMCJLCE110A	TVS	Vrwm=110V, Vbr=122..135V, 8.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC110C	-	SMCJLCE110C	TVS	Vrwm=110V, Vbr=122..149V, 7.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC110CA	-	SMCJLCE110CA	TVS	Vrwm=110V, Vbr=122..135V, 8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC11A	-	SMCJLCE11A	TVS	Vrwm=11V, Vbr=12.2..13.5V, 82A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC11C	-	SMCJLCE11C	TVS	Vrwm=11V, Vbr=12.2..14.9V, 74A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC11CA	-	SMCJLCE11CA	TVS	Vrwm=11V, Vbr=12.2..13.5V, 82A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC12	-	SMCJLCE12	TVS	Vrwm=12V, Vbr=13.3..16.3V, 68A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC120	-	SMCJLCE120	TVS	Vrwm=120V, Vbr=133..163V, 7.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC120A	-	SMCJLCE120A	TVS	Vrwm=120V, Vbr=133..147V, 7.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC120C	-	SMCJLCE120C	TVS	Vrwm=120V, Vbr=133..163V, 7.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC120CA	-	SMCJLCE120CA	TVS	Vrwm=120V, Vbr=133..147V, 7.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC12A	-	SMCJLCE12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, 75A, 1500W(1ms)	DO-214AB	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
LC12C	-	SMCJLCE12C	TVS	Vrwm=12V, Vbr=13.3..16.3V, 68A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC12CA	-	SMCJLCE12CA	TVS	Vrwm=12V, Vbr=13.3..14.7V, 75A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC13	-	SMCJLCE13	TVS	Vrwm=13V, Vbr=14.4..17.6V, 63A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC130	-	SMCJLCE130	TVS	Vrwm=130V, Vbr=144..176V, 6.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC130A	-	SMCJLCE130A	TVS	Vrwm=130V, Vbr=144..159V, 7.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC130C	-	SMCJLCE130C	TVS	Vrwm=130V, Vbr=144..176V, 6.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC130CA	-	SMCJLCE130CA	TVS	Vrwm=130V, Vbr=144..159V, 7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC13A	-	SMCJLCE13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, 70A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC13C	-	SMCJLCE13C	TVS	Vrwm=13V, Vbr=14.4..17.6V, 63A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC13CA	-	SMCJLCE13CA	TVS	Vrwm=13V, Vbr=14.4..15.9V, 70A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC14	-	SMCJLCE14	TVS	Vrwm=14V, Vbr=15.6..19.1V, 58A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC14A	-	SMCJLCE14A	TVS	Vrwm=14V, Vbr=15.6..17.2V, 65A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC14C	-	SMCJLCE14C	TVS	Vrwm=14V, Vbr=15.6..19.1V, 58A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC14CA	-	SMCJLCE14CA	TVS	Vrwm=14V, Vbr=15.6..17.2V, 65A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC15	-	SMCJLCE15	TVS	Vrwm=15V, Vbr=16.7..20.4V, 56A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC150	-	SMCJLCE150	TVS	Vrwm=150V, Vbr=167..204V, 5.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC150A	-	SMCJLCE150A	TVS	Vrwm=150V, Vbr=167..185V, 6.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC150C	-	SMCJLCE150C	TVS	Vrwm=150V, Vbr=167..204V, 5.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC150CA	-	SMCJLCE150CA	TVS	Vrwm=150V, Vbr=167..185V, 6.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC15A	-	SMCJLCE15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, 61A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC15C	-	SMCJLCE15C	TVS	Vrwm=15V, Vbr=16.7..20.4V, 56A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC15CA	-	SMCJLCE15CA	TVS	Vrwm=15V, Vbr=16.7..18.5V, 61A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC16	-	SMCJLCE16	TVS	Vrwm=16V, Vbr=17.8..21.8V, 52A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC160	-	SMCJLCE160	TVS	Vrwm=160V, Vbr=178..218V, 5.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC160A	-	SMCJLCE160A	TVS	Vrwm=160V, Vbr=178..197V, 5.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC160C	-	SMCJLCE160C	TVS	Vrwm=160V, Vbr=178..218V, 5.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC160CA	-	SMCJLCE160CA	TVS	Vrwm=160V, Vbr=178..197V, 5.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC16A	-	SMCJLCE16A	TVS	Vrwm=16V, Vbr=17.8..19.7V, 57A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC16C	-	SMCJLCE16C	TVS	Vrwm=16V, Vbr=17.8..21.8V, 52A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC16CA	-	SMCJLCE16CA	TVS	Vrwm=16V, Vbr=17.8..19.7V, 57A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC17	-	SMCJLCE17	TVS	Vrwm=17V, Vbr=18.9..23.1V, 49A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC170	-	SMCJLCE170	TVS	Vrwm=170V, Vbr=189..231V, 4.9A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC170A	-	SMCJLCE170A	TVS	Vrwm=170V, Vbr=189..209V, 5.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC170C	-	SMCJLCE170C	TVS	Vrwm=170V, Vbr=189..231V, 4.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC170CA	-	SMCJLCE170CA	TVS	Vrwm=170V, Vbr=189..209V, 5.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC17A	-	SMCJLCE17A	TVS	Vrwm=17V, Vbr=18.9..20.9V, 54A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC17C	-	SMCJLCE17C	TVS	Vrwm=17V, Vbr=18.9..23.1V, 49A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC17CA	-	SMCJLCE17CA	TVS	Vrwm=17V, Vbr=18.9..20.9V, 54A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC18	-	SMCJLCE18	TVS	Vrwm=18V, Vbr=20.0..24.4V, 46A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC18A	-	SMCJLCE18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, 51A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC18C	-	SMCJLCE18C	TVS	Vrwm=18V, Vbr=20.0..24.4V, 46A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC18CA	-	SMCJLCE18CA	TVS	Vrwm=18V, Vbr=20.0..22.1V, 51A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC20	-	SMCJLCE20	TVS	Vrwm=20V, Vbr=22.2..27.1V, 42A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC20A	-	SMCJLCE20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, 46A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC20C	-	SMCJLCE20C	TVS	Vrwm=20V, Vbr=22.2..27.1V, 42A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC20CA	-	SMCJLCE20CA	TVS	Vrwm=20V, Vbr=22.2..24.5V, 46A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC22	-	SMCJLCE22	TVS	Vrwm=22V, Vbr=24.4..29.8V, 38A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC22A	-	SMCJLCE22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, 42A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC22C	-	SMCJLCE22C	TVS	Vrwm=22V, Vbr=24.4..29.8V, 38A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC22CA	-	SMCJLCE22CA	TVS	Vrwm=22V, Vbr=24.4..26.9V, 42A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC24	-	SMCJLCE24	TVS	Vrwm=24V, Vbr=26.7..32.6V, 35A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC24A	-	SMCJLCE24A	TVS	Vrwm=24V, Vbr=26.7..29.5V, 39A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC24C	-	SMCJLCE24C	TVS	Vrwm=24V, Vbr=26.7..32.6V, 35A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC24CA	-	SMCJLCE24CA	TVS	Vrwm=24V, Vbr=26.7..29.5V, 39A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC26	-	SMCJLCE26	TVS	Vrwm=26V, Vbr=28.9..35.3V, 32A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC26A	-	SMCJLCE26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, 36A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC26C	-	SMCJLCE26C	TVS	Vrwm=26V, Vbr=28.9..35.3V, 32A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC26CA	-	SMCJLCE26CA	TVS	Vrwm=26V, Vbr=28.9..31.9V, 36A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC28	-	SMCJLCE28	TVS	Vrwm=28V, Vbr=31.1..38.0V, 30A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC28A	-	SMCJLCE28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, 33A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC28C	-	SMCJLCE28C	TVS	Vrwm=28V, Vbr=31.1..38.0V, 30A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC28CA	-	SMCJLCE28CA	TVS	Vrwm=28V, Vbr=31.1..34.4V, 33A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC30	-	SMCJLCE30	TVS	Vrwm=30V, Vbr=33.3..40.7V, 28A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC30A	-	SMCJLCE30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, 31A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC30C	-	SMCJLCE30C	TVS	Vrwm=30V, Vbr=33.3..40.7V, 28A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC30CA	-	SMCJLCE30CA	TVS	Vrwm=30V, Vbr=33.3..36.8V, 31A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC33	-	SMCJLCE33	TVS	Vrwm=33V, Vbr=36.7..44.9V, 25.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC33A	-	SMCJLCE33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, 28.1A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC33C	-	SMCJLCE33C	TVS	Vrwm=33V, Vbr=36.7..44.9V, 25.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC33CA	-	SMCJLCE33CA	TVS	Vrwm=33V, Vbr=36.7..40.6V, 28.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
LC36	-	SMCJLCE36	TVS	Vrwm=36V, Vbr=40.0..48.9V, 23.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC36A	-	SMCJLCE36A	TVS	Vrwm=36V, Vbr=40.0..44.2V, 25.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC36C	-	SMCJLCE36C	TVS	Vrwm=36V, Vbr=40.0..48.9V, 23.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC36CA	-	SMCJLCE36CA	TVS	Vrwm=36V, Vbr=40.0..44.2V, 25.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC40	-	SMCJLCE40	TVS	Vrwm=40V, Vbr=44.4..54.3V, 21A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC40A	-	SMCJLCE40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, 23.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC40C	-	SMCJLCE40C	TVS	Vrwm=40V, Vbr=44.4..54.3V, 21A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC40CA	-	SMCJLCE40CA	TVS	Vrwm=40V, Vbr=44.4..49.1V, 23.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC43	-	SMCJLCE43	TVS	Vrwm=43V, Vbr=47.8..58.4V, 19.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC43A	-	SMCJLCE43A	TVS	Vrwm=43V, Vbr=47.8..52.8V, 21.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC43C	-	SMCJLCE43C	TVS	Vrwm=43V, Vbr=47.8..58.4V, 19.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC43CA	-	SMCJLCE43CA	TVS	Vrwm=43V, Vbr=47.8..52.8V, 21.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC45	-	SMCJLCE45	TVS	Vrwm=45V, Vbr=50.0..61.1V, 18.7A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC45A	-	SMCJLCE45A	TVS	Vrwm=45V, Vbr=50.0..55.3V, 20.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC45C	-	SMCJLCE45C	TVS	Vrwm=45V, Vbr=50.0..61.1V, 18.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC45CA	-	SMCJLCE45CA	TVS	Vrwm=45V, Vbr=50.0..55.3V, 20.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC48	-	SMCJLCE48	TVS	Vrwm=48V, Vbr=53.3..65.1V, 17.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC48A	-	SMCJLCE48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, 19.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC48C	-	SMCJLCE48C	TVS	Vrwm=48V, Vbr=53.3..65.1V, 17.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC48CA	-	SMCJLCE48CA	TVS	Vrwm=48V, Vbr=53.3..58.9V, 19.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC51	-	SMCJLCE51	TVS	Vrwm=51V, Vbr=56.7..69.3V, 16.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC51A	-	SMCJLCE51A	TVS	Vrwm=51V, Vbr=56.7..62.7V, 18.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC51C	-	SMCJLCE51C	TVS	Vrwm=51V, Vbr=56.7..69.3V, 16.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC51CA	-	SMCJLCE51CA	TVS	Vrwm=51V, Vbr=56.7..62.7V, 18.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC54	-	SMCJLCE54	TVS	Vrwm=54V, Vbr=60.0..73.3V, 15.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC54A	-	SMCJLCE54A	TVS	Vrwm=54V, Vbr=60.0..66.3V, 17.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC54C	-	SMCJLCE54C	TVS	Vrwm=54V, Vbr=60.0..73.3V, 15.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC54CA	-	SMCJLCE54CA	TVS	Vrwm=54V, Vbr=60.0..66.3V, 17.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC58	-	SMCJLCE58	TVS	Vrwm=58V, Vbr=64.4..78.7V, 14.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC58A	-	SMCJLCE58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, 16A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC58C	-	SMCJLCE58C	TVS	Vrwm=58V, Vbr=64.4..78.7V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC58CA	-	SMCJLCE58CA	TVS	Vrwm=58V, Vbr=64.4..71.2V, 16A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC6.5	-	SMCJLCE6.5	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, 100A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC6.5A	-	SMCJLCE6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 100A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC6.5C	-	SMCJLCE6.5C	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, 100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC6.5CA	-	SMCJLCE6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC60	-	SMCJLCE60	TVS	Vrwm=60V, Vbr=66.7..81.5V, 14A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC60A	-	SMCJLCE60A	TVS	Vrwm=60V, Vbr=66.7..73.7V, 15.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC60C	-	SMCJLCE60C	TVS	Vrwm=60V, Vbr=66.7..81.5V, 14A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC60CA	-	SMCJLCE60CA	TVS	Vrwm=60V, Vbr=66.7..73.7V, 15.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC64	-	SMCJLCE64	TVS	Vrwm=64V, Vbr=71.1..86.9V, 13.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC64A	-	SMCJLCE64A	TVS	Vrwm=64V, Vbr=71.1..78.6V, 14.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC64C	-	SMCJLCE64C	TVS	Vrwm=64V, Vbr=71.1..86.9V, 13.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC64CA	-	SMCJLCE64CA	TVS	Vrwm=64V, Vbr=71.1..78.6V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC7.0	-	SMCJLCE7.0	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, 100A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC7.0A	-	SMCJLCE7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, 100A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC7.0C	-	SMCJLCE7.0C	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, 100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC7.0CA	-	SMCJLCE7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, 100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC7.5	-	SMCJLCE7.5	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, 100A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC7.5A	-	SMCJLCE7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 100A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC7.5C	-	SMCJLCE7.5C	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, 100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC7.5CA	-	SMCJLCE7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC70	-	SMCJLCE70	TVS	Vrwm=70V, Vbr=77.8..95.1V, 12.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC70A	-	SMCJLCE70A	TVS	Vrwm=70V, Vbr=77.8..86.0V, 13.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC70C	-	SMCJLCE70C	TVS	Vrwm=70V, Vbr=77.8..95.1V, 12.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC70CA	-	SMCJLCE70CA	TVS	Vrwm=70V, Vbr=77.8..86.0V, 13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC75	-	SMCJLCE75	TVS	Vrwm=75V, Vbr=83.3..102V, 11.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC75A	-	SMCJLCE75A	TVS	Vrwm=75V, Vbr=83.3..92.1V, 12.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC75C	-	SMCJLCE75C	TVS	Vrwm=75V, Vbr=83.3..102V, 11.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC75CA	-	SMCJLCE75CA	TVS	Vrwm=75V, Vbr=83.3..92.1V, 12.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC8.0	-	SMCJLCE8.0	TVS	Vrwm=8.0V, Vbr=8.89..10.9V, 100A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC8.0A	-	SMCJLCE8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 100A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC8.0C	-	SMCJLCE8.0C	TVS	Vrwm=8.0V, Vbr=8.89..10.9V, 100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC8.0CA	-	SMCJLCE8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC8.5	-	SMCJLCE8.5	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, 94A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC8.5A	-	SMCJLCE8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 100A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC8.5C	-	SMCJLCE8.5C	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, 94A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC8.5CA	-	SMCJLCE8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC80	-	SMCJLCE80	TVS	Vrwm=80V, Vbr=88.7..108V, 10.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC80A	-	SMCJLCE80A	TVS	Vrwm=80V, Vbr=88.7..98.0V, 11.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
LC80C	-	SMCJLCE80C	TVS	Vrwm=80V, Vbr=88.7..108V, 10.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC80CA	-	SMCJLCE80CA	TVS	Vrwm=80V, Vbr=88.7..98.0V, 11.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC9.0	-	SMCJLCE9.0	TVS	Vrwm=9.0V, Vbr=10.0..12.2V, 89A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC9.0A	-	SMCJLCE9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, 97A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC9.0C	-	SMCJLCE9.0C	TVS	Vrwm=9.0V, Vbr=10.0..12.2V, 89A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC9.0CA	-	SMCJLCE9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, 97A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC90	-	SMCJLCE90	TVS	Vrwm=90V, Vbr=100..122V, 9.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC90A	-	SMCJLCE90A	TVS	Vrwm=90V, Vbr=100..111V, 10.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
LC90C	-	SMCJLCE90C	TVS	Vrwm=90V, Vbr=100..122V, 9.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LC90CA	-	SMCJLCE90CA	TVS	Vrwm=90V, Vbr=100..111V, 10.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
LD	-	P6SMB18	TVS	Vrwm=18V, Vbr=17.1..18.9V, 23.8A, 600W(1ms)	DO-214AA	1d	2j	Fag
LD	-	P6SMBJ12	TVS	Vrwm=12V, Vbr=10.8..13.2V, 35A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LD	-	SM6T6V8C	TVS	Vrwm=5.8V, Vbr=6.45..7.14V, 57A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
LD	-	SMBG12	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms)	DO-215AA	5d	1k	Vs
LD	-	SMBJ12	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
LD	-	TV06B120K-G	TVS	Vrwm=12V, Vbr=13.30..16.30V, Ipp=27.27A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LDJ	-	P6SMB18	TVS	Vrwm=18V, Vbr=17.1..18.9V, 23.8A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LDK	-	SMB18	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 22.6A, 600W(1ms)	DO-214AA	1d	1a	Lge
LDM	-	SMB18C	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 22.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LE	-	1SMB12A	TVS	Vrwm=12V, 30.2A, 600W(1ms)	403A	3d	1s	Ons
LE	-	3.0SMB14A	Zener diode	13.30..15.30V, Zzt=5.0Ω, Izt=53mA, 3W	DO-214AA	1d	1b	Rul
LE	-	CD214B-T12A	TVS	Vrwm=12V, Irsm=30.2A, 600W(1ms)	DO-214AA	1d	1a	Brn
LE	-	P6SMB18A	TVS	Vrwm=18V, Vbr=17.1..18.9V, 23.8A, 600W(1ms)	DO-214AA	1d	2j	Fag
LE	-	P6SMBJ12A	TVS	Vrwm=12V, Vbr=11.4..12.6V, 36A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LE	-	SM6T6V8CA	TVS	Vrwm=5.8V, Vbr=6.45..7.14V, 57A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde
LE	-	SMA6J12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, Ipp=30.2A, 600W(1ms)	DO-214AC	1d	1a	Mco
LE	-	SMBG12A	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms)	DO-215AA	5d	1k	Vs
LE	-	SMBJ12A	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms)	DO-214AA	1d	1m	Di
LE	-	SMBJ12A	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
LE	-	SMF12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, 10.1A, 200W(1ms)	SOD-123FL	7d	1a	Eic
LE	-	SMF12CA	TVS	Vrwm=12V, Vbr=13.30..14.70V, 10.1A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
LE	-	TV02W120B-G	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=10.1A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
LE	-	TV06B120J-G	TVS	Vrwm=12V, Vbr=13.30..14.70V, Ipp=30.15A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LEC	-	1SMB12CA	TVS	Vrwm=12V, 30.2A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LEC	-	SZ1SMB12CA	TVS	Vrwm=12V, 30.2A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LEJ	-	P6SMB18A	TVS	Vrwm=18V, Vbr=17.1..18.9V, 23.8A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LEK	-	SMB18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 23.5A, 600W(1ms)	DO-214AA	1d	1a	Lge
LEM	-	SMB18CA	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 23.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LEP	-	TPSMB18A	TVS	Vrwm=18V, Ipp=23.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
LF	-	KDZ18FV	Zener diode	16.80..19.10V, Izt=5mA, Zzt=20Ω, 100mW	TFSC	7d	1a	Kec
LF	-	MAZD130	Zener diode	12.4..14.1V, Zzt=35Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
LF	-	P6SMB20	TVS	Vrwm=20V, Vbr=19..21.0V, 21.7A, 600W(1ms)	DO-214AA	1d	2j	Fag
LF	-	P6SMBJ13	TVS	Vrwm=13V, Vbr=11.7..14.3V, 32A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LF	-	PZU5.6BA	Zener diode	5.6V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
LF	-	SM6T7V5C	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, 53A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
LF	-	SMBG13	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms)	DO-215AA	5d	1k	Vs
LF	-	SMBJ13	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
LF	-	TV06B130K-G	TVS	Vrwm=13.0V, Vbr=14.40..17.60V, Ipp=25.21A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LFJ	-	P6SMB20	TVS	Vrwm=20V, Vbr=19..21.0V, 21.7A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LFK	-	SMB20	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 20.6A, 600W(1ms)	DO-214AA	1d	1a	Lge
LFM	-	SMB20C	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 20.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LFP	-	TPSMB20	TVS	Vrwm=20V, Ipp=20.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
LG	-	1SMB13A	TVS	Vrwm=13V, 27.9A, 600W(1ms)	403A	3d	1s	Ons
LG	-	3.0SMB15A	Zener diode	14.40..16.50V, Zzt=5.5Ω, Izt=50mA, 3W	DO-214AA	1d	1b	Rul
LG	-	CD214B-T13A	TVS	Vrwm=13V, Irsm=27.9A, 600W(1ms)	DO-214AA	1d	1a	Brn
LG	-	P6SMB20A	TVS	Vrwm=20V, Vbr=19..21.0V, 21.7A, 600W(1ms)	DO-214AA	1d	2j	Fag
LG	-	P6SMBJ13A	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LG	-	PZU5.6B1A	Zener diode	5.6V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
LG	-	SM6T7V5CA	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, 53A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Mde
LG	-	SMA6J13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, Ipp=27.9A, 600W(1ms)	DO-214AC	1d	1a	Mco
LG	-	SMBG13A	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms)	DO-215AA	5d	1k	Vs
LG	-	SMBJ13A	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
LG	-	SMBJ13A	TVS	Vrwm=13V, Vbr=14.4..18.2V, 25.2A, 600W(1ms)	DO-214AA	1d	1m	Di
LG	-	SMF13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, 9.3A, 200W(1ms)	SOD-123FL	7d	1a	Eic
LG	-	SMF13CA	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, 9.3A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
LG	-	TV06B130J-G	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=27.91A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LG7	-	SM6T15A	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, 28A, 600W(1ms)	DO-214AA	1d	1k	Vs
LG7	-	SM6T15CA	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, 28A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
LGC	-	1SMB13CA	TVS	Vrwm=13V, 27.9A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LGC	-	SZ1SMB13CA	TVS	Vrwm=13V, 27.9A, 600W(1ms), Bidir.	403C	3ba	2t	Ons

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
LGJ	-	P6SMB20A	TVS	Vrwm=20V, Vbr=19..21.0V, 21.7A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LGK	-	SMB20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 21.7A, 600W(1ms)	DO-214AA	1d	1a	Lge
LGM	-	SMB20CA	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 21.7A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LGP	-	TPSMB20A	TVS	Vrwm=20V, Ipp=21.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
LH	-	P6SMB22	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 20.0A, 600W(1ms)	DO-214AA	1d	2j	Fag
LH	-	P6SMBJ14	TVS	Vrwm=14V, Vbr=15.5..19.8V, 23.3A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LH	-	PZU5.6B2A	Zener diode	5.6V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
LH	-	SMBG14	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms)	DO-215AA	5d	1k	Vs
LH	-	SMBJ14	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
LH	-	TV06B140K-G	TVS	Vrwm=14.0V, Vbr=15.60..19.10V, Ipp=23.26A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LHJ	-	P6SMB22	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 20.0A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LHK	-	SMB22	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 18.8A, 600W(1ms)	DO-214AA	1d	1a	Lge
LHM	-	SMB22C	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 18.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LHP	-	TPSMB22	TVS	Vrwm=22V, Ipp=18.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
LI	-	SK410C	Si-diode	SBR, 100V, 4A, Vf<0.85V(4A)	DO-214AB	1d	2j	Fag
LJ	-	SK415C	Si-diode	SBR, 150V, 4A, Vf<0.9V(4A)	DO-214AB	1d	2j	Fag
LK	-	1SMB14A	TVS	Vrwm=14V, 25.8A, 600W(1ms)	403A	3d	1s	Ons
LK	-	3.0SMB16A	Zener diode	15.60..17.90V, Zzt=5.5Ω, Izt=47mA, 3W	DO-214AA	1d	1b	Rul
LK	-	CD214B-T14A	TVS	Vrwm=14V, Irsm=25.8A, 600W(1ms)	DO-214AA	1d	1a	Brn
LK	-	P6SMB22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 20.0A, 600W(1ms)	DO-214AA	1d	2j	Fag
LK	-	P6SMBJ14A	TVS	Vrwm=14V, Vbr=15.5..19.8V, 600W(1ms)	DO-214AA	1d	1a	Pjt
LK	-	PZU5.6B3A	Zener diode	5.6V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
LK	-	SMA6J14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, Ipp=25.9A, 600W(1ms)	DO-214AC	1d	1a	Mco
LK	-	SMBG14A	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms)	DO-215AA	5d	1k	Vs
LK	-	SMBJ14A	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms)	DO-214AA	1d	1m	Di
LK	-	SMBJ14A	TVS	Vrwm=14V, Vbr=15.6..19.8V, 23.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
LK	-	SMF14A	TVS	Vrwm=14V, Vbr=15.6..17.2V, 8.6A, 200W(1ms)	SOD-123FL	7d	1a	Eic
LK	-	SMF14CA	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, 8.62A, 200W(10/1000μs), Bidir.	SOD-123FL	7ba	1j	Ers
LK	-	TV02W140B-G	TVS	Vrwm=14V, Vbr=15.6..17.2V, Ipp=8.62A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
LK	-	TV06B140J-G	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=25.86A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LKC	-	1SMB14CA	TVS	Vrwm=14V, 25.8A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LKC	-	SZ1SMB14CA	TVS	Vrwm=14V, 25.8A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LKJ	-	P6SMB22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 20.0A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LKK	-	SMB22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 19.6A, 600W(1ms)	DO-214AA	1d	1a	Lge
LKM	-	SMB22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 19.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LKP	-	TPSMB22A	TVS	Vrwm=22V, Ipp=19.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
LL	-	BBY53-02W	C-diode	VCO-tuning, 6V, 20mA, 3.1..5.8pF(3..1V)	SCD-80	6d	1u	Sie
LL	-	P6SMB24	TVS	Vrwm=24V, Vbr=22.8..25.2V, 18.1A, 600W(1ms)	DO-214AA	1d	2j	Fag
LL	-	P6SMBJ15	TVS	Vrwm=15V, Vbr=13.5..16.5V, 27A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LL	-	PZU6.2BA	Zener diode	6.2V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
LL	-	SMBG15	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-215AA	5d	1k	Vs
LL	-	SMBJ15	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
LL	-	TV06B150K-G	TVS	Vrwm=15.0V, Vbr=16.70..20.40V, Ipp=22.30A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LLJ	-	P6SMB24	TVS	Vrwm=24V, Vbr=22.8..25.2V, 18.1A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LLK	-	SMB24	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 17.3A, 600W(1ms)	DO-214AA	1d	1a	Lge
LLM	-	SMB24C	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 17.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LLP	-	TPSMB24	TVS	Vrwm=24V, Ipp=17.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
LM	-	1SMB15A	TVS	Vrwm=15V, 24.0A, 600W(1ms)	403A	3d	1s	Ons
LM	-	3.0SMB18A	Zener diode	16.70..19.20V, Zzt=6.0Ω, Izt=42mA, 3W	DO-214AA	1d	1b	Rul
LM	-	CD214B-T15A	TVS	Vrwm=15V, Irsm=24.0A, 600W(1ms)	DO-214AA	1d	1a	Brn
LM	-	P6SMB24A	TVS	Vrwm=24V, Vbr=22.8..25.2V, 18.1A, 600W(1ms)	DO-214AA	1d	2j	Fag
LM	-	P6SMBJ15A	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LM	-	PZU6.2B1A	Zener diode	6.2V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
LM	-	SDM20U30	Si-diode	Schottky, 30V, 200mA, Vf<500mV(200mA)	SOD-523	6d	1a	Di
LM	-	SMA6J15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, Ipp=24.6A, 600W(1ms)	DO-214AC	1d	1a	Mco
LM	-	SMBG15A	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-215AA	5d	1k	Vs
LM	-	SMBJ15A	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
LM	-	SMBJ15A	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-214AA	1d	1m	Di
LM	-	SMF15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, 8.2A, 200W(1ms)	SOD-123FL	7d	1a	Eic
LM	-	SMF15CA	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, 8.20A, 200W(10/1000μs), Bidir.	SOD-123FL	7ba	1j	Ers
LM	-	TV02W150B-G	TVS	Vrwm=15V, Vbr=16.7..18.5V, Ipp=8.20A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
LM	-	TV06B150J-G	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=24.59A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LM7	-	SM6T18A	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, 24A, 600W(1ms)	DO-214AA	1d	1k	Vs
LMC	-	1SMB15CA	TVS	Vrwm=15V, 24.0A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LMC	-	SZ1SMB15CA	TVS	Vrwm=15V, 24.0A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LMJ	-	P6SMB24A	TVS	Vrwm=24V, Vbr=22.8..25.2V, 18.1A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LMK	-	SMB24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 18.1A, 600W(1ms)	DO-214AA	1d	1a	Lge
LMM	-	SMB24CA	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 18.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LMP	-	TPSMB24A	TVS	Vrwm=14V, Ipp=18.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
LN	-	P6SMB27	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.0A, 600W(1ms)	DO-214AA	1d	2j	Fag

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
LN	-	P6SMBJ16	TVS	Vrwm=16V, Vbr=14.4..17.6V, 20.8A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LN	-	PZU6.2B2A	Zener diode	6.2V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
LN	-	SM6T10C	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, 41A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
LN	-	SMBG16	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms)	DO-215AA	5d	1k	Vs
LN	-	SMBJ16	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
LN	-	TV06B160K-G	TVS	Vrwm=16.0V, Vbr=17.80..21.80V, Ipp=20.83A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LNJ	-	P6SMB27	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.0A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LNK	-	SMB27	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 15.3A, 600W(1ms)	DO-214AA	1d	1a	Lge
LNM	-	SMB27C	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 15.3A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LNP	-	TPSMB27	TVS	Vrwm=27V, Ipp=15.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
LOP	-	TPSMB18	TVS	Vrwm=18V, Ipp=22.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
LP	-	1SMB16A	TVS	Vrwm=16V, 23.1A, 600W(1ms)	403A	3d	1s	Ons
LP	-	3.0SMB19A	Zener diode	17.80..20.50V, Zzt=7.0Ω, Izt=40mA, 3W	DO-214AA	1d	1b	Rul
LP	-	CD214B-T16A	TVS	Vrwm=16V, Irsm=23.1A, 600W(1ms)	DO-214AA	1d	1a	Brn
LP	-	CMDZ5L1	Zener diode	4.845..5.355V, Izt=0.5mA, Zzt=400Ω, 250mW	SOD-323	5d	1a	Cen
LP	-	KDZ18FVY	Zener diode	17.56..18.35V, Izt=5mA, Zzt=20Ω, 100mW	TFSC	7d	1a	Kec
LP	-	P6SMB27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.0A, 600W(1ms)	DO-214AA	1d	2j	Fag
LP	-	P6SMBJ16A	TVS	Vrwm=16V, Vbr=14.4..17.6V, 23.1A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LP	-	PZU6.2B3A	Zener diode	6.2V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
LP	-	SM6T10CA	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, 41A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde
LP	-	SMA6J16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, Ipp=23.1A, 600W(1ms)	DO-214AC	1d	1a	Mco
LP	-	SMBG16A	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms)	DO-215AA	5d	1k	Vs
LP	-	SMBJ16A	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
LP	-	SMBJ16A	TVS	Vrwm=16V, Vbr=17.8..22.6V, 20.8A, 600W(1ms)	DO-214AA	1d	1m	Di
LP	-	SMF16A	TVS	Vrwm=16V, Vbr=17.8..19.7V, 7.7A, 200W(1ms)	SOD-123FL	7d	1a	Eic
LP	-	SMF16CA	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, 7.69A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
LP	-	TV02W160B-G	TVS	Vrwm=16V, Vbr=17.8..19.7V, Ipp=7.69A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
LP	-	TV06B160J-G	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=19.67A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LPC	-	1SMB16CA	TVS	Vrwm=16V, 23.1A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LPC	-	SZ1SMB16CA	TVS	Vrwm=16V, 23.1A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LPJ	-	P6SMB27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.0A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LPK	-	SMB27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.0A, 600W(1ms)	DO-214AA	1d	1a	Lge
LPM	-	SMB27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 16.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LPP	-	TPSMB27A	TVS	Vrwm=27V, Ipp=16A, 600W(1ms)	DO-214AA	1d	1k	Vs
LQ	-	P6SMB30	TVS	Vrwm=30V, Vbr=28.5..31.5V, 14.5A, 600W(1ms)	DO-214AA	1d	2j	Fag
LQ	-	P6SMBJ17	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LQ	-	SK420C	Si-diode	SBR, 200V, 4A, Vf<0.9V(4A)	DO-214AB	1d	2j	Fag
LQ	-	SMBG17	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms)	DO-215AA	5d	1k	Vs
LQ	-	SMBJ17	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
LQ	-	TV06B170K-G	TVS	Vrwm=17.0V, Vbr=18.90..23.10V, Ipp=21.74A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LQJ	-	P6SMB30	TVS	Vrwm=30V, Vbr=28.5..31.5V, 14.5A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LQK	-	SMB30	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 13.8A, 600W(1ms)	DO-214AA	1d	1a	Lge
LQM	-	SMB30C	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 13.8A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LQP	-	TPSMB30	TVS	Vrwm=30V, Ipp=13.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
LR	-	1SMB17A	TVS	Vrwm=17V, 21.7A, 600W(1ms)	403A	3d	1s	Ons
LR	-	3.0SMB20A	Zener diode	18.90..21.70V, Zzt=7.0Ω, Izt=37mA, 3W	DO-214AA	1d	1b	Rul
LR	-	CD214B-T17A	TVS	Vrwm=17V, Irsm=21.7A, 600W(1ms)	DO-214AA	1d	1a	Brn
LR	-	P6SMB30A	TVS	Vrwm=30V, Vbr=28.5..31.5V, 14.5A, 600W(1ms)	DO-214AA	1d	2j	Fag
LR	-	P6SMBJ17A	TVS	Vrwm=17V, Vbr=18.9..23.9V, 21.7A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LR	-	PZU6.8BA	Zener diode	6.8V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
LR	-	SMA6J17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, Ipp=21.7A, 600W(1ms)	DO-214AC	1d	1a	Mco
LR	-	SMBG17A	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms)	DO-215AA	5d	1k	Vs
LR	-	SMBJ17A	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms)	DO-214AA	1d	1m	Di
LR	-	SMBJ17A	TVS	Vrwm=17V, Vbr=18.9..23.9V, 19.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
LR	-	SMF17A	TVS	Vrwm=17V, Vbr=18.9..20.9V, 7.2A, 200W(1ms)	SOD-123FL	7d	1a	Eic
LR	-	SMF17CA	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, 7.25A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
LR	-	TV02W170B-G	TVS	Vrwm=17V, Vbr=18.9..20.9V, Ipp=7.25A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
LR	-	TV06B170J-G	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=18.63A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LRC	-	1SMB17CA	TVS	Vrwm=17V, 21.7A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LRC	-	SZ1SMB17CA	TVS	Vrwm=17V, 21.7A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LRJ	-	P6SMB30A	TVS	Vrwm=30V, Vbr=28.5..31.5V, 14.5A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LRK	-	SMB30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 14.4A, 600W(1ms)	DO-214AA	1d	1a	Lge
LRM	-	SMB30CA	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 14.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LRP	-	TPSMB30A	TVS	Vrwm=30V, Ipp=14.5A, 600W(1ms)	DO-214AA	1d	1k	Vs
LS	-	P6SMB33	TVS	Vrwm=33V, Vbr=31.4..34.7V, 13.1A, 600W(1ms)	DO-214AA	1d	2j	Fag
LS	-	P6SMBJ18	TVS	Vrwm=18V, Vbr=16.2..19.8V, 18.6A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LS	-	PZU6.8B1A	Zener diode	6.8V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
LS	-	SMBG18	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms)	DO-215AA	5d	1k	Vs
LS	-	SMBJ18	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
LS	-	TV06B180K-G	TVS	Vrwm=18.0V, Vbr=20.0..24.40V, Ipp=20.55A, 600W(1ms)	DO-214AA	1d	1a	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
LSJ	-	P6SMB33	TVS	Vrwm=33V, Vbr=31.4..34.7V, 13.1A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LSK	-	SMB33	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 12.6A, 600W(1ms)	DO-214AA	1d	1a	Lge
LSM	-	SMB33C	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 12.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LSP	-	TPSMB33	TVS	Vrwm=33V, Ipp=12.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
LT	-	1SMB18A	TVS	Vrwm=18V, 20.5A, 600W(1ms)	403A	3d	1s	Ons
LT	-	3.0SMB22A	Zener diode	20.0..23.30V, Zzt=8.0Ω, Izt=34mA, 3W	DO-214AA	1d	1b	Rul
LT	-	CD214B-T18A	TVS	Vrwm=18V, Irsm=20.5A, 600W(1ms)	DO-214AA	1d	1a	Brn
LT	-	P6SMB33A	TVS	Vrwm=33V, Vbr=31.4..34.7V, 13.1A, 600W(1ms)	DO-214AA	1d	2j	Fag
LT	-	P6SMBJ18A	TVS	Vrwm=18V, Vbr=16.2..19.8V, 20.5A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LT	-	PZU6.8B2A	Zener diode	6.8V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
LT	-	SM6T12CA	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, 36A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde
LT	-	SMA6J18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, Ipp=20.5A, 600W(1ms)	DO-214AC	1d	1a	Mco
LT	-	SMBG18A	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms)	DO-215AA	5d	1k	Vs
LT	-	SMBJ18A	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
LT	-	SMBJ18A	TVS	Vrwm=18V, Vbr=20.0..25.3V, 18.6A, 600W(1ms)	DO-214AA	1d	1m	Di
LT	-	SMF18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, 6.8A, 200W(1ms)	SOD-123FL	7d	1a	Eic
LT	-	SMF18CA	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, 6.85A, 200W(10/1000μs), Bidir.	SOD-123FL	7ba	1j	Ers
LT	-	TV02W180B-G	TVS	Vrwm=18V, Vbr=20.0..22.1V, Ipp=6.85A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
LT	-	TV06B180J-G	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=17.64A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LT7	-	SM6T22A	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, 20A, 600W(1ms)	DO-214AA	1d	1k	Vs
LTC	-	1SMB18CA	TVS	Vrwm=18V, 20.5A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LTC	-	SZ1SMB18CA	TVS	Vrwm=18V, 20.5A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LTJ	-	P6SMB33A	TVS	Vrwm=33V, Vbr=31.4..34.7V, 13.1A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LTK	-	SMB33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 13.2A, 600W(1ms)	DO-214AA	1d	1a	Lge
LTM	-	SMB33CA	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 13.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LTP	-	TPSMB33A	TVS	Vrwm=33V, Ipp=13.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
LU	-	P6SMB36	TVS	Vrwm=36V, Vbr=34.2..37.8V, 12A, 600W(1ms)	DO-214AA	1d	2j	Fag
LU	-	P6SMBJ20	TVS	Vrwm=20V, Vbr=18..22V, 216.7A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LU	-	PZU6.8B3A	Zener diode	6.8V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
LU	-	SMBG20	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms)	DO-215AA	5d	1k	Vs
LU	-	SMBJ20	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
LU	-	TV06B200K-G	TVS	Vrwm=20.0V, Vbr=22.20..27.10V, Ipp=19.76A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LUJ	-	P6SMB36	TVS	Vrwm=36V, Vbr=34.2..37.8V, 12A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LUK	-	SMB36	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 11.6A, 600W(1ms)	DO-214AA	1d	1a	Lge
LUM	-	SMB36C	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 11.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LUP	-	TPSMB36	TVS	Vrwm=36V, Ipp=11.5A, 600W(1ms)	DO-214AA	1d	1k	Vs
LV	-	1SMB20A	TVS	Vrwm=20V, 18.5A, 600W(1ms)	403A	3d	1s	Ons
LV	-	3.0SMB24A	Zener diode	22.20..25.50V, Zzt=9.0Ω, Izt=31mA, 3W	DO-214AA	1d	1b	Rul
LV	-	CD214B-T20A	TVS	Vrwm=20V, Irsm=18.5A, 600W(1ms)	DO-214AA	1d	1a	Brn
LV	-	PZU7.5BA	Zener diode	7.5V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
LV	-	SMA6J20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, Ipp=18.5A, 600W(1ms)	DO-214AC	1d	1a	Mco
LV	-	SMBG20A	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms)	DO-215AA	5d	1k	Vs
LV	-	SMBJ20A	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms)	DO-214AA	1d	1m	Di
LV	-	SMBJ20A	TVS	Vrwm=20V, Vbr=22.2..28.1V, 16.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
LV	-	SMF20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, 6.2A, 200W(1ms)	SOD-123FL	7d	1a	Eic
LV	-	SMF20CA	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, 6.17A, 200W(10/1000μs), Bidir.	SOD-123FL	7ba	1j	Ers
LV	-	TV02W200B-G	TVS	Vrwm=20V, Vbr=22.2..24.5V, Ipp=6.17A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
LV	-	TV06B200J-G	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=18.52A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LVC	-	1SMB20CA	TVS	Vrwm=20V, 18.5A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LVC	-	SZ1SMB20CA	TVS	Vrwm=20V, 18.5A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LVJ	-	P6SMB36A	TVS	Vrwm=36V, Vbr=34.2..37.8V, 12A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LVK	-	SMB36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 12.0A, 600W(1ms)	DO-214AA	1d	1a	Lge
LVM	-	SMB36CA	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 12.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LW	-	P6SMB39	TVS	Vrwm=39V, Vbr=37.1..41V, 11.1A, 600W(1ms)	DO-214AA	1d	2j	Fag
LW	-	P6SMBJ22	TVS	Vrwm=22V, Vbr=19.8..24.2V, 15.2A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LW	-	PZU7.5B1A	Zener diode	7.5V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
LW	-	SM6T15C	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, 28A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
LW	-	SMBG22	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms)	DO-215AA	5d	1k	Vs
LW	-	SMBJ22	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
LW	-	TV06B220K-G	TVS	Vrwm=22.0V, Vbr=24.40..29.80V, Ipp=15.23A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LWJ	-	P6SMB39	TVS	Vrwm=39V, Vbr=37.1..41V, 11.1A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LWK	-	SMB39	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 10.6A, 600W(1ms)	DO-214AA	1d	1a	Lge
LWM	-	SMB39C	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 10.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LWP	-	TPSMB39	TVS	Vrwm=39V, Ipp=10.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
LX	-	1SMB22A	TVS	Vrwm=22V, 16.9A, 600W(1ms)	403A	3d	1s	Ons
LX	-	3.0SMB27A	Zener diode	24.40..28.0V, Zzt=10Ω, Izt=28mA, 3W	DO-214AA	1d	1b	Rul
LX	-	CD214B-T22A	TVS	Vrwm=22V, Irsm=16.9A, 600W(1ms)	DO-214AA	1d	1a	Brn
LX	-	P6SMB39A	TVS	Vrwm=39V, Vbr=37.1..41V, 11.1A, 600W(1ms)	DO-214AA	1d	2j	Fag
LX	-	P6SMBJ22A	TVS	Vrwm=22V, Vbr=19.8..24.2V, 16.9A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LX	-	PZU7.5B2A	Zener diode	7.5V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
LX	-	SM6T15CA	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, 28A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde
LX	-	SMA6J22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, Ipp=16.9A, 600W(1ms)	DO-214AC	1d	1a	Mco
LX	-	SMBG22A	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms)	DO-215AA	5d	1k	Vs
LX	-	SMBJ22A	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms)	DO-214AA	1d	1m	Di
LX	-	SMBJ22A	TVS	Vrwm=22V, Vbr=24.4..30.9V, 15.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
LX	-	SMF22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, 5.6A, 200W(1ms)	SOD-123FL	7d	1a	Eic
LX	-	SMF22CA	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, 5.63A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
LX	-	TV02W220B-G	TVS	Vrwm=22V, Vbr=24.4..26.9V, Ipp=5.63A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
LX	-	TV06B220J-G	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=16.90A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LX0	-	FSS110L	Si-diode	SBR, 100V, 1A, Vf<0.8V(1A)	DO-214AC	7d	2n	Fag
LX5	-	FSS115L	Si-diode	SBR, 150V, 1A, Vf<0.9V(1A)	DO-214AC	7d	2n	Fag
LX7	-	SM6T27A	TVS	Vrwm=23.1V, Vbr=25.7..28.4V, 16A, 600W(1ms)	DO-214AA	1d	1k	Vs
LXC	-	1SMB22CA	TVS	Vrwm=22V, 16.9A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LXC	-	SZ1SMB22CA	TVS	Vrwm=22V, 16.9A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LXJ	-	P6SMB39A	TVS	Vrwm=39V, Vbr=37.1..41V, 11.1A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LXK	-	SMB39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 11.2A, 600W(1ms)	DO-214AA	1d	1a	Lge
LXM	-	SMB39CA	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 11.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LXP	-	TPSMB39A	TVS	Vrwm=39V, Ipp=11.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
LY	-	KDZ5.1VVY	Zener diode	4.98..5.20V, Izt=5mA, Zzt=70Ω, 100mW	VSC	7d	1a	Kec
LY	-	P6SMB43	TVS	Vrwm=43V, Vbr=40.9..45.2V, 10.1A, 600W(1ms)	DO-214AA	1d	2j	Fag
LY	-	P6SMBJ24	TVS	Vrwm=24V, Vbr=21.6..26.4V, 14A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LY	-	PZU7.5B3A	Zener diode	7.5V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
LY	-	SMBG24	TVS	Vrwm=24V, Vbr=26.7..33.8V, 14.0A, 600W(1ms)	DO-215AA	5d	1k	Vs
LY	-	SMBJ24	TVS	Vrwm=24V, Vbr=26.7..33.8V, 14.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
LY	-	TV06B240K-G	TVS	Vrwm=24.0V, Vbr=26.70..32.60V, Ipp=13.95A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LYJ	-	P6SMB43	TVS	Vrwm=43V, Vbr=40.9..45.2V, 10.1A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LYK	-	SMB43	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 9.6A, 600W(1ms)	DO-214AA	1d	1a	Lge
LYM	-	SMB43C	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 9.6A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LYP	-	TPSMB43	TVS	Vrwm=43V, Ipp=9.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
LZ	-	1SMB24A	TVS	Vrwm=24V, 15.4A, 600W(1ms)	403A	3d	1s	Ons
LZ	-	3.0SMB28A	Zener diode	26.70..30.70V, Zzt=12Ω, Izt=27mA, 3W	DO-214AA	1d	1b	Rul
LZ	-	BZT52B16S	Zener diode	15.68..16.32V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1a	Tsc
LZ	-	CD214B-T24A	TVS	Vrwm=24V, Irsm=15.4A, 600W(1ms)	DO-214AA	1d	1a	Brn
LZ	-	MM3Z16VB	Zener diode	15.68..16.32V, Zzt=37Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
LZ	-	MM3Z16VBW	Zener diode	15.68..16.32V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1a	Tac
LZ	-	P6SMB43A	TVS	Vrwm=43V, Vbr=40.9..45.2V, 10.1A, 600W(1ms)	DO-214AA	1d	2j	Fag
LZ	-	P6SMBJ24A	TVS	Vrwm=24V, Vbr=21.6..26.4V, 15.4A, 600W(1ms)	DO-214AA	1d	1a	Pjt
LZ	-	PZU8.2BA	Zener diode	8.2V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
LZ	-	SMA6J24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, Ipp=15.4A, 600W(1ms)	DO-214AC	1d	1a	Mco
LZ	-	SMBG24A	TVS	Vrwm=24V, Vbr=26.7..30.7V, 15.4A, 600W(1ms)	DO-215AA	5d	1k	Vs
LZ	-	SMBJ24A	TVS	Vrwm=24V, Vbr=26.7..30.7V, 15.4A, 600W(1ms)	DO-214AA	1d	1k	Vs
LZ	-	SMBJ24A	TVS	Vrwm=24V, Vbr=26.7..30.7V, 15.4A, 600W(1ms)	DO-214AA	1d	1m	Di
LZ	-	SMF24A	TVS	Vrwm=24V, Vbr=26.7..29.5V, 5.1A, 200W(1ms)	SOD-123FL	7d	1a	Eic
LZ	-	SMF24CA	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, 5.14A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
LZ	-	TCMM3Z16VB	Zener diode	16V±2%, Izt=5mA, Zzt=37Ω, 200mW	SOD-323FL	7d	1a	Tac
LZ	-	TV02W240B-G	TVS	Vrwm=24V, Vbr=26.7..29.5V, Ipp=5.14A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
LZ	-	TV06B240J-G	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=15.42A, 600W(1ms)	DO-214AA	1d	1a	Cmc
LZC	-	1SMB24CA	TVS	Vrwm=24V, 15.4A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LZC	-	SZ1SMB24CA	TVS	Vrwm=24V, 15.4A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
LZJ	-	P6SMB43A	TVS	Vrwm=43V, Vbr=40.9..45.2V, 10.1A, 600W(1ms)	DO-214AA	1d	1u	Tsc
LZK	-	SMB43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 10.1A, 600W(1ms)	DO-214AA	1d	1a	Lge
LZM	-	SMB43CA	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 10.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
LZP	-	TPSMB43A	TVS	Vrwm=43V, Ipp=10.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
M	-	BB837	C-diode	SATV-tuning, 35V, 6..0.65pF(1..28V)	SOD-323	5d	1a	Sie
m	-	MMSZ5237BPT	Zener diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 225mW	SOD-523	6d	1a	Chm
M	au	MMSZ5262BPT	Zener diode	51V±5%, Izt=2.5mA, Zzt=125Ω, 225mW	SOD-523	6d	1a	Chm
M	az	BAR65-03W	PIN-diode	TV-Tuner, 30V, 100mA, Vf<1V(50mA), <0.9pF	SOD-323	5d	2	Inf
M	ba	BB512	C-diode	AM-tuning, 12V, 50mA, Ir<0.02µA, Cv=440/520pF	SOD-123	5d	2	Sie
m.	-	MMSZ5237SPT	Zener diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 225mW	SOD-523	6d	1a	Chm
M.	au	MMSZ5262SPT	Zener diode	51V±5%, Izt=2.5mA, Zzt=125Ω, 225mW	SOD-523	6d	1a	Chm
M.0	-	MMSZ5260C-V-G	Zener diode	43V±2%, Izt= 3mA, Zzt=93Ω, 500mW	SOD-123	5d	1kb	Vs
M.6	-	MMSZ5256C-V-G	Zener diode	30V±2%, Izt=4.2mA, Zzt=49Ω, 500mW	SOD-123	5d	1kb	Vs
M.7	-	MMSZ5257C-V-G	Zener diode	33V±2%, Izt=3.8mA, Zzt=58Ω, 500mW	SOD-123	5d	1kb	Vs
M.8	-	MMSZ5258C-V-G	Zener diode	36V±2%, Izt=3.4mA, Zzt=70Ω, 500mW	SOD-123	5d	1kb	Vs
M.9	-	MMSZ5259C-V-G	Zener diode	39V±2%, Izt=3.2mA, Zzt=80Ω, 500mW	SOD-123	5d	1kb	Vs
M0	-	BZD27C62P	TVS	Vbr=58V, Vcl=86.5V, 1.7A, 150W(1ms)	SOD-123FL	7d	1a	Lge
M0	-	CMOZ5L6	Zener diode	5.32..5.88V, Izt=0.25mA, Zzt=1400Ω, 250mW	SOD-523	6d	1a	Cen
M0	-	MMPZ5269BPT	Zener diode	82.65..91.35V, Izt=1.4mA, Zzt=370Ω, 225mW	SOD-323	5d	1a	Chm
M0	-	MMSZ5260B-V-G	Zener diode	43V±5%, Izt= 3mA, Zzt=93Ω, 500mW	SOD-123	5d	1kb	Vs
M1	-	BAP27-01	PIN-diode	RF, 50V, 100mA, 315mW, 0.61pF, 0.95Ω(10mA/100MHz)	SOD-723A	6d	1a	Phi

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
M1	-	BZD17C180P	Zener diode	168..191V, Zzt=280Ω, Izt=4mA, 800mW	SOD-123FL	7d	2u	Tsc
M1	-	BZD27C68P	TVS	Vbr=64V, Vcl=94.4V, 1.6A, 150W(1ms)	SOD-123FL	7d	1a	Lge
M1	-	BZX384-B13	Zener diode	13V±2.5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Nxp
M1	-	CMOZ2L4	Zener diode	2.28..2.52V, Izt=0.25mA, Zzt=1400Ω, 250mW	SOD-523	6d	1a	Cen
M1	-	CZRH5256B-G	Zener diode	28.5..31.5V, Zzt=49Ω, Izt=4.2mA, 150mW	SOD-523	6d	1a	Cmc
M1	-	CZRV5256B-G	Zener diode	28.5..31.5V, Zzt=49Ω, Izt=4.2mA, 200mW	SOD-323	5d	1a	Cmc
M1	-	CZRW5256B-G	Zener diode	28.50..31.50V, Zzt=49Ω, Izt=4.2mA, 500mW	SOD-123	5d	1a	Cmc
M1	-	LMSZ5256BT1G	Zener diode	28.5..31.5V, Izt=4.2mA, 500mW	SOD-123	5d	1d	Lrc
M1	-	MM3Z5232B	Zener diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 200mW	SOD-323FL	7d	1a	Bts
M1	-	MM3Z5232BH	Zener diode	5.32..5.88V, Izt=20mA, Zzt=11Ω, 300mW	SOD-323	5d	1a	Zow
M1	-	MM3Z5256B	Zener diode	28.50..31.50V, Izt=4.2mA, Zzt=49Ω, 200mW	SOD-323	5d	1a	Ext
M1	-	MMBZ5256BV	Zener diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 200mW	SOD-523	6d	1a	Pjt
M1	-	MMSZ5256B	Zener diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 500mW	SOD-123	5d	1d	Di
M1	-	MMSZ5256B-F	Zener diode	28.50 31.50V, Izt=4.2mA, 500mW	SOD-123F	7d	1a	Ttr
M1	-	MMSZ5256BS	Zener diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 200mW	SOD-323	5d	1d	Di
M1	-	MMSZ5256BWS	Zener diode	28.50..31.50V, Izt=4.2mA, 200mW	SOD-323F	7d	1a	Ttr
M1	-	OYD30VT1	Zener diode	28...32V, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1a	Ouy
M1	ag	MMSZ5256B	Zener diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 500mW	SOD-123	5d	1d	Di
M11	-	STPS1H100MF	Si-diode	SBR, 100V, 1A, Vf<0.62V(1A)	DO-220AA	8d	1a	Ste
M12	-	1PMT12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=8.8A, 175W(1ms)	DO-216AA	4d	1g	Ons
M16	-	1PMT16A	TVS	Vrwm=16V, Vbr=17.8..19.7V, 7A, 175W(1ms)	DO-216AA	4d	1g	Ons
M18	-	1PMT18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, 6A, 175W(1ms)	DO-216AA	4d	1g	Ons
M2	-	BA277-01	PIN-diode	VHF-band-Sw, 35V, 100mA, 715mW, 1.2pF, 0.7Ω(2mA/100MHz)	SOD-723	6d	1a	Phi
M2	-	BZD17C200P	Zener diode	188..212V, Zzt=350Ω, Izt=4mA, 800mW	SOD-123FL	7d	2u	Tsc
M2	-	BZD27C75P	TVS	Vbr=70V, Vcl=103.5V, 1.5A, 150W(1ms)	SOD-123FL	7d	1a	Lge
M2	-	BZX384-B15	Zener diode	15V±2.5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Nxp
M2	-	CMOZ2L5	Zener diode	2.37..2.63V, Izt=0.25mA, Zzt=1500Ω, 250mW	SOD-523	6d	1a	Cen
M2	-	CZRH5257B-G	Zener diode	31.35..34.65V, Zzt=58Ω, Izt=3.8mA, 150mW	SOD-523	6d	1a	Cmc
M2	-	CZRV5257B-G	Zener diode	31.35..34.65V, Zzt=58Ω, Izt=3.8mA, 200mW	SOD-323	5d	1a	Cmc
M2	-	CZRW5257B-G	Zener diode	31.35..34.65V, Zzt=58Ω, Izt=3.8mA, 500mW	SOD-123	5d	1a	Cmc
M2	-	LMSZ5257BT1G	Zener diode	31.35..34.65V, Izt=3.8mA, 500mW	SOD-123	5d	1d	Lrc
M2	-	MM3Z5254B	Zener diode	27V±5%, Izt=4.6mA, Zzt=41Ω, 200mW	SOD-323FL	7d	1a	Bts
M2	-	MM3Z5254BH	Zener diode	25.65..28.35V, Izt=4.6mA, Zzt=41Ω, 300mW	SOD-323	5d	1a	Zow
M2	-	MM3Z5257B	Zener diode	31.35..34.65V, Izt=3.8mA, Zzt=58Ω, 200mW	SOD-323	5d	1a	Ext
M2	-	MMBZ5257BV	Zener diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 200mW	SOD-523	6d	1a	Pjt
M2	-	MMSZ5257B	Zener diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 500mW	SOD-123	5d	1d	Di
M2	-	MMSZ5257B-F	Zener diode	31.35..34.65V, Izt=3.8mA, 500mW	SOD-123F	7d	1a	Ttr
M2	-	MMSZ5257BS	Zener diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 200mW	SOD-323	5d	1d	Di
M2	-	MMSZ5257BWS	Zener diode	31.35..34.65V, Izt=3.8mA, 200mW	SOD-323F	7d	1a	Ttr
M2	-	OYD33VT1	Zener diode	31...35V, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1a	Ouy
M2	ag	MMSZ5257B	Zener diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 500mW	SOD-123	5d	1d	Di
M22	-	1PMT22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, 4.9A, 175W(1ms)	DO-216AA	4d	1g	Ons
M24	-	1PMT24A	TVS	Vrwm=24V, Vbr=26.7..29.5, 4.5A, 175W(1ms)	DO-216AA	4d	1g	Ons
M26	-	1PMT26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, 4.2A, 175W(1ms)	DO-216AA	4d	1g	Ons
M28	-	1PMT28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, 3.9A, 175W(1ms)	DO-216AA	4d	1g	Ons
M3	-	BZD17C220P	Zener diode	208..233V, Zzt=430Ω, Izt=4mA, 800mW	SOD-123FL	7d	2u	Tsc
M3	-	BZD27C82P	TVS	Vbr=77V, Vcl=114V, 1.3A, 150W(1ms)	SOD-123FL	7d	1a	Lge
M3	-	BZX384-B16	Zener diode	16V±2.5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Nxp
M3	-	CMOZ2L7	Zener diode	2.57..2.84V, Izt=0.25mA, Zzt=1500Ω, 250mW	SOD-523	6d	1a	Cen
M3	-	CZRH5258B-G	Zener diode	34.2..37.8V, Zzt=70Ω, Izt=3.4mA, 150mW	SOD-523	6d	1a	Cmc
M3	-	CZRV5258B-G	Zener diode	34.2..37.8V, Zzt=70Ω, Izt=3.4mA, 200mW	SOD-323	5d	1a	Cmc
M3	-	CZRW5258B-G	Zener diode	34.20..37.80V, Zzt=70Ω, Izt=3.4mA, 500mW	SOD-123	5d	1a	Cmc
M3	-	LMSZ5258BT1G	Zener diode	34.2..37.8V, Izt=3.4mA, 500mW	SOD-123	5d	1d	Lrc
M3	-	MM3Z5258B	Zener diode	34.20..37.80V, Izt=3.4mA, Zzt=70Ω, 200mW	SOD-323	5d	1a	Ext
M3	-	MMBZ5258BV	Zener diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 200mW	SOD-523	6d	1a	Pjt
M3	-	MMSZ5258B	Zener diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 500mW	SOD-123	5d	1d	Di
M3	-	MMSZ5258B-F	Zener diode	34.20..37.80V, Izt=3.4mA, 500mW	SOD-123F	7d	1a	Ttr
M3	-	MMSZ5258BS	Zener diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 200mW	SOD-323	5d	1d	Di
M3	-	MMSZ5258BWS	Zener diode	34.20..37.80V, Izt=3.4mA, 200mW	SOD-323F	7d	1a	Ttr
M3	-	OYD36VT1	Zener diode	34...38V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1a	Ouy
M3	-	RKZ16B2KK	Zener diode	15.85..16.51V, Izt=5mA, Zzt=40Ω, 150mW	SFP	7d	1a	Ren
M3	-	RKZ16B2KL	Zener diode	15.85..16.51V, Izt=5mA, Zzt=40Ω, 100mW	EFP	7d	1a	Ren
M3	ag	MMSZ5258B	Zener diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 500mW	SOD-123	5d	1d	Di
M30	-	1PMT30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, 3.6A, 175W(1ms)	DO-216AA	4d	1g	Ons
M30	-	CMOZ3L0	Zener diode	2.85..3.15V, Izt=0.25mA, Zzt=1600Ω, 250mW	SOD-523	6d	1a	Cen
M33	-	1PMT33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, 3.3A, 175W(1ms)	DO-216AA	4d	1g	Ons
M36	-	1PMT36A	TVS	Vrwm=36V, Vbr=40.0..44.2V, 3A, 175W(1ms)	DO-216AA	4d	1g	Ons
M4	-	BZD27C91P	TVS	Vbr=85V, Vcl=126V, 1.2A, 150W(1ms)	SOD-123FL	7d	1a	Lge
M4	-	BZX384-B18	Zener diode	18V±2.5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Nxp
M4	-	CMOZ3L3	Zener diode	3.14..3.47V, Izt=0.25mA, Zzt=1600Ω, 250mW	SOD-523	6d	1a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
M4	-	CZRH5259B-G	Zener diode	37.05..40.95V, Zzt=80Ω, Izt=3.2mA, 150mW	SOD-523	6d	1a	Cmc
M4	-	CZRV5259B-G	Zener diode	37.05..40.95V, Zzt=80Ω, Izt=3.2mA, 200mW	SOD-323	5d	1a	Cmc
M4	-	CZRW5259B-G	Zener diode	37.05..40.95V, Zzt=80Ω, Izt=3.2mA, 500mW	SOD-123	5d	1a	Cmc
M4	-	LMSZ5259BT1G	Zener diode	37.05..40.95V, Izt=3.2mA, 500mW	SOD-123	5d	1d	Lrc
M4	-	MM1Z5232B	Zener diode	5.32..5.88V, Izt=20mA, Zzt=11Ω, 500mW	SOD-323FL	7d	1a	Eic
M4	-	MM1Z5232BH	Zener diode	5.32..5.88V, Izt=20mA, Zzt=11Ω, 500mW	SOD-123	5d	1a	Zow
M4	-	MM3Z5259B	Zener diode	37.05..40.95V, Izt=3.2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Ext
M4	-	MMBZ5259BV	Zener diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Pjt
M4	-	MMSZ5232B	Zener diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 500mW	SOD-123	5d	1a	Eic
M4	-	MMSZ5259B	Zener diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 500mW	SOD-123	5d	1d	Di
M4	-	MMSZ5259B-F	Zener diode	37.05..40.95V, Izt=3.2mA, 500mW	SOD-123F	7d	1a	Ttr
M4	-	MMSZ5259BS	Zener diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 200mW	SOD-323	5d	1d	Di
M4	-	MMSZ5259BWS	Zener diode	37.05..40.95V, Izt=3.2mA, 200mW	SOD-323F	7d	1a	Ttr
M4	-	OYD39VT1	Zener diode	37...41V, Izt=2.5mA, Zzt=100Ω, 500mW	SOD-123	5d	1a	Ouy
M4	ag	MMSZ5259B	Zener diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 500mW	SOD-123	5d	1d	Di
M40	-	1PMT40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, 2.7A, 175W(1ms)	DO-216AA	4d	1g	Ons
M48	-	1PMT48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, 2.3A, 175W(1ms)	DO-216AA	4d	1g	Ons
M5	-	1PMT5.0A	TVS	Vrwm=5.0V, Vbr=6.4..7.0V, 19A, 175W(1ms)	DO-216AA	4d	1g	Ons
M5	-	BZD27C100P	TVS	Vbr=94V, Vcl=139V, 1.1A, 150W(1ms)	SOD-123FL	7d	1a	Lge
M5	-	BZX384-B20	Zener diode	20V±2.5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Nxp
M5	-	BZX584B18V	Zener diode	17.64..18.36V, Izt=5mA, Zzt=45Ω, 200mW	SOD-523FL	7d	1a	Tac
M5	-	CMOZ3L6	Zener diode	3.42..3.78V, Izt=0.25mA, Zzt=1700Ω, 250mW	SOD-523	6d	1a	Cen
M5	-	CZRH5260B-G	Zener diode	40.85..45.15V, Zzt=93Ω, Izt=3mA, 150mW	SOD-523	6d	1a	Cmc
M5	-	CZRV5260B-G	Zener diode	40.85..45.15V, Zzt=93Ω, Izt=3mA, 200mW	SOD-323	5d	1a	Cmc
M5	-	LMSZ5260BT1G	Zener diode	40.85..45.15V, Izt=3mA, 500mW	SOD-123	5d	1d	Lrc
M5	-	MM1Z5254B	Zener diode	25.65..28.35V, Izt=4.6mA, Zzt=41Ω, 500mW	SOD-323FL	7d	1a	Eic
M5	-	MM1Z5254BH	Zener diode	25.65..28.35V, Izt=4.6mA, Zzt=41Ω, 500mW	SOD-123	5d	1a	Zow
M5	-	MM3Z5260B	Zener diode	40.85..45.15V, Izt=3.0mA, Zzt=93Ω, 200mW	SOD-323	5d	1a	Ext
M5	-	MM5Z18VB	Zener diode	17.64..18.36V, Izt=5mA, Zzt=45Ω, 200mW	SOD-523FL	7d	1a	Tac
M5	-	MMBZ5260BV	Zener diode	43V±5%, Izt=3.0mA, Zzt=93Ω, 200mW	SOD-523	6d	1a	Pjt
M5	-	MMSZ5254B	Zener diode	27V±5%, Izt=4.6mA, Zzt=41Ω, 500mW	SOD-123	5d	1a	Eic
M5	-	MMSZ5260B-F	Zener diode	40.85..45.15V, Izt=3.0mA, 500mW	SOD-123F	7d	1a	Ttr
M5	-	MMSZ5260BWS	Zener diode	40.85..45.15V, Izt=3.0mA, 200mW	SOD-323F	7d	1a	Ttr
M5	-	OYD43VT1	Zener diode	40...46V, Izt=2.5mA, Zzt=130Ω, 500mW	SOD-123	5d	1a	Ouy
M51	-	1PMT51A	TVS	Vrwm=51V, Vbr=56.7..62.7V, 2.1A, 175W(1ms)	DO-216AA	4d	1g	Ons
M58	-	1PMT58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, 1.9A, 175W(1ms)	DO-216AA	4d	1g	Ons
M6	-	BZD27C110P	TVS	Vbr=104V, Vcl=139V, 0.72A, 150W(1ms)	SOD-123FL	7d	1a	Lge
M6	-	BZX384-B22	Zener diode	22V±2.5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Nxp
M6	-	CMOZ3L9	Zener diode	3.71..4.10V, Izt=0.25mA, Zzt=1600Ω, 250mW	SOD-523	6d	1a	Cen
M6	-	MMSZ5256B-V-G	Zener diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 500mW	SOD-123	5d	1kb	Vs
M6	-	RKZ18B2KK	Zener diode	17.56..18.35V, Izt=5mA, Zzt=45Ω, 150mW	SFP	7d	1a	Ren
M6	-	RKZ18B2KL	Zener diode	17.56..18.35V, Izt=2mA, Zzt=45Ω, 100mW	EFP	7d	1a	Ren
M7	-	1PMT7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.6V, 14.6A, 175W(1ms)	DO-216AA	4d	1g	Ons
M7	-	BZD27C120P	TVS	Vbr=114V, Vcl=152V, 0.65A, 150W(1ms)	SOD-123FL	7d	1a	Lge
M7	-	BZX384-B24	Zener diode	24V±2.5%, Izt=2mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Nxp
M7	-	CMOZ4L3	Zener diode	4.09..4.52V, Izt=0.25mA, Zzt=1600Ω, 250mW	SOD-523	6d	1a	Cen
M7	-	MMSZ5257B-V-G	Zener diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 500mW	SOD-123	5d	1kb	Vs
M8	-	BZD27C130P	TVS	Vbr=124V, Vcl=169V, 0.59A, 150W(1ms)	SOD-123FL	7d	1a	Lge
M8	-	BZT52C8V2WT	Zener diode	7.79..8.61V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Ttr
M8	-	BZX384-B27	Zener diode	27V±2.5%, Izt=2mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Nxp
M8	-	CMOZ4L7	Zener diode	4.47..4.94V, Izt=0.25mA, Zzt=1500Ω, 250mW	SOD-523	6d	1a	Cen
M8	-	MM5Z8V2	Zener diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Eic
M8	-	MM5Z8V2H	Zener diode	7.7..8.7V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Zow
M8	-	MMSZ5258B-V-G	Zener diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 500mW	SOD-123	5d	1kb	Vs
M9	-	BZD27C150P	TVS	Vbr=138V, Vcl=187V, 0.53A, 150W(1ms)	SOD-123FL	7d	1a	Lge
M9	-	BZX384-B30	Zener diode	30V±2.5%, Izt=2mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Nxp
M9	-	CMOZ5L1	Zener diode	4.85..5.36V, Izt=0.25mA, Zzt=1500Ω, 250mW	SOD-523	6d	1a	Cen
M9	-	MM1Z5253B	Zener diode	23.75..26.25V, Izt=5.0mA, Zzt=35Ω, 500mW	SOD-323FL	7d	1a	Eic
M9	-	MM1Z5253BH	Zener diode	23.75..26.25V, Izt=5.23mA, Zzt=35Ω, 500mW	SOD-123	5d	1a	Zow
M9	-	MMSZ5253B	Zener diode	25V±5%, Izt=5mA, Zzt=35Ω, 500mW	SOD-123	5d	1a	Eic
M9	-	MMSZ5259B-V-G	Zener diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 500mW	SOD-123	5d	1kb	Vs
M9	-	RKZ20B2KK	Zener diode	19.52..20.39V, Izt=5mA, Zzt=50Ω, 150mW	SFP	7d	1a	Ren
M9	-	RKZ20B2KL	Zener diode	19.52..20.39V, Izt=2mA, Zzt=50Ω, 100mW	EFP	7d	1a	Ren
MA	-	1N60PWS	Si-diode	SBD, Sw, 45V, 50mA, Vf<0.45V(50mA), 1pF	SOD-323FL	7d	1a	Sme
MA	-	P4SMA200CA	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
MA	-	S1MA	Si-diode	Rectifier, 1000V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1k	Vs
MB	-	KDZ5.6B	Zener diode	5.6V±2.5%, 40mA, 1W	PMDU	7d	1s	Rhm
MB	-	P4SMA220CA	TVS	Vbr=209..231V, Vrwm=185V, 1.22A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
MC	-	PZU3.6B1A	Zener diode	3.6V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MD	-	DDZ9707	Zener diode	20V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
MD	-	DDZ9707S	Zener diode	20V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
MD	-	DDZ9707T	Zener diode	20V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
MD	-	MURS120	Si-diode	U-fast Rectifier, 200V, 1A, Vf<0.71V(1A)	DO-214AA	1d	1k	Vs
MD	-	MURS320	Si-diode	U-fast Rectifier, 200V, 3A, Vf<0.71V(3A)	DO-214AB	1d	1k	Vs
MD	-	P6SMB47	TVS	Vrwm=47V, Vbr=44.7..49.4V, 9.3A, 600W(1ms)	DO-214AA	1d	2j	Fag
MD	-	P6SMBJ26	TVS	Vrwm=26V, Vbr=28.9..36.6V, 12.4A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MD	-	PZU3.6B2A	Zener diode	3.6V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MD	-	SM6T18C	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, 24A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
MD	-	SMBG26	TVS	Vrwm=26V, Vbr=28.9..36.6V, 12.4A, 600W(1ms)	DO-215AA	5d	1k	Vs
MD	-	SMBJ26	TVS	Vrwm=26V, Vbr=28.9..36.6V, 12.4A, 600W(1ms)	DO-214AA	1d	1k	Vs
MD	-	TV06B260K-G	TVS	Vrwm=26.0V, Vbr=28.90..35.30V, Ipp=12.88A, 600W(1ms)	DO-214AA	1d	1a	Cmc
MDE	-	SM15T6V8A	TVS	Vrwm=5.8V, Vbr=6.45..7.14V, 143A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MDG	-	SM15T7V5A	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, 132A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MDJ	-	P6SMB47	TVS	Vrwm=47V, Vbr=44.7..49.4V, 9.3A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MDK	-	SMB47	TVS	Vbr=42.3..51.7V, Vrwm=38.1V, 8.85A, 600W(1ms)	DO-214AA	1d	1a	Lge
MDM	-	SMB47C	TVS	Vbr=42.3..51.7V, Vrwm=38.1V, 8.85A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MDP	-	SM15T10A	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, 103A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MDT	-	SM15T12A	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, 90A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MDX	-	SM15T15A	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, 71A, 1500W(1ms)	DO-214AB	1d	1q	Ste
ME	-	1N5818WB	Si-diode	SBR, 30V, 1A, Vf<0.55V(1A), 120pF	SOD-123FL	7d	1a	Sme
ME	-	1SMB26A	TVS	Vrwm=26V, 14.2A, 600W(1ms)	403A	3d	1s	Ons
ME	-	3.0SMB30A	Zener diode	28.90..33.20V, Zzt=16Ω, Izt=25mA, 3W	DO-214AA	1d	1b	Rul
ME	-	CD214B-T26A	TVS	Vrwm=26V, Irsm=14.2A, 600W(1ms)	DO-214AA	1d	1a	Brn
ME	-	DDZ9708	Zener diode	22V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
ME	-	DDZ9708S	Zener diode	22V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
ME	-	DDZ9708T	Zener diode	22V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
ME	-	P6SMB47A	TVS	Vrwm=47V, Vbr=44.7..49.4V, 9.3A, 600W(1ms)	DO-214AA	1d	2j	Fag
ME	-	P6SMBJ26A	TVS	Vrwm=26V, Vbr=28.9..36.6V, 14.2A, 600W(1ms)	DO-214AA	1d	1a	Pjt
ME	-	PZU3.9BA	Zener diode	3.9V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
ME	-	SM6T18CA	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, 24A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde
ME	-	SMA6J26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, Ipp=14.3A, 600W(1ms)	DO-214AC	1d	1a	Mco
ME	-	SMBG26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, 14.2A, 600W(1ms)	DO-215AA	5d	1k	Vs
ME	-	SMBJ26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, 14.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
ME	-	SMBJ26A	TVS	Vrwm=26V, Vbr=28.9..33.2V, 14.2A, 600W(1ms)	DO-214AA	1d	1m	Di
ME	-	SMF26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, 4.8A, 200W(1ms)	SOD-123FL	7d	1a	Eic
ME	-	SMF26CA	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, 4.75A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
ME	-	TV02W260B-G	TVS	Vrwm=26V, Vbr=28.9..31.9V, Ipp=4.75A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
ME	-	TV06B260J-G	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=14.25A, 600W(1ms)	DO-214AA	1d	1a	Cmc
ME7	-	SM6T30A	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, 14.5A, 600W(1ms)	DO-214AA	1d	1k	Vs
MEC	-	1SMB26CA	TVS	Vrwm=26V, 14.2A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MEC	-	SZ1SMB26CA	TVS	Vrwm=26V, 14.2A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MEE	-	SM15T18A	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, 59.5A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MEJ	-	P6SMB47A	TVS	Vrwm=47V, Vbr=44.7..49.4V, 9.3A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MEK	-	SM15T22A	TVS	Vrwm=18.8, Vbr=20.9..23.1V, 49A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MEK	-	SMB47A	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 9.26A, 600W(1ms)	DO-214AA	1d	1a	Lge
MEM	-	SM15T24A	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, 45A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MEM	-	SMB47CA	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 9.26A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MEP	-	SM15T27A	TVS	Vrwm=23.1V, Vbr=25.7..28.4V, 40A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MER	-	SM15T30A	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, 36.2A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MET	-	SM15T33A	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, 32.8A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MEV	-	SM15T36A	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, 30A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MEX	-	SM15T39A	TVS	Vrwm=33.3V, Vbr=37.1..41V, 28A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MF	-	DDZ9709	Zener diode	24V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
MF	-	DDZ9709S	Zener diode	24V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
MF	-	DDZ9709T	Zener diode	24V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
MF	-	KDZ20FV	Zener diode	18.80..21.20V, Izt=5mA, Zzt=25Ω, 100mW	TFSC	7d	1a	Kec
MF	-	MAZD150	Zener diode	13.9..15.6V, Zzt=40Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
MF	-	MM3Z2V2B	Zener diode	2.08..2.33V, Izt=5mA, Zzt=100Ω, 300mW	SOD-323FL	7d	1a	Lge
MF	-	P6SMB51	TVS	Vrwm=51V, Vbr=48.5..53.6V, 8.6A, 600W(1ms)	DO-214AA	1d	2j	Fag
MF	-	P6SMBJ28	TVS	Vrwm=28V, Vbr=31.1..39.4V, 12A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MF	-	PZU3.9B1A	Zener diode	3.9V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MF	-	SMBG28	TVS	Vrwm=28V, Vbr=31.1..39.4V, 12.0A, 600W(1ms)	DO-215AA	5d	1k	Vs
MF	-	SMBJ28	TVS	Vrwm=28V, Vbr=31.1..39.4V, 12.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
MF	-	TV06B280K-G	TVS	Vrwm=28.0V, Vbr=31.10..38.0V, Ipp=12.0A, 600W(1ms)	DO-214AA	1d	1a	Cmc
MFJ	-	P6SMB51	TVS	Vrwm=51V, Vbr=48.5..53.6V, 8.6A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MFK	-	SMB51	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 8.16A, 600W(1ms)	DO-214AA	1d	1a	Lge
MFM	-	SMB45C	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 8.16A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MFO	-	SM15T75A	TVS	Vrwm=64.0V, Vbr=71.3..78.8V, 14.6A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MFP	-	SM15T68A	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, 16.3A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MFX	-	SM15T100A	TVS	Vrwm=85.5V, Vbr=95..105V, 11A, 1500W(1ms)	DO-214AB	1d	1q	Ste

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
MG	-	1SMB28A	TVS	Vrwm=28V, 13.2A, 600W(1ms)	403A	3d	1s	Ons
MG	-	3.0SMB33A	Zener diode	31.30..35.80V, Zzt=20Ω, Izt=23mA, 3W	DO-214AA	1d	1b	Rul
MG	-	CD214B-T28A	TVS	Vrwm=28V, Irsm=13.2A, 600W(1ms)	DO-214AA	1d	1a	Brn
MG	-	MURS140	Si-diode	U-fast Rectifier, 400V, 1A, Vf<1.05V(1A)	DO-214AA	1d	1k	Vs
MG	-	MURS240	Si-diode	U-fast Rectifier, 400V, 2A, Vf<1.2V(2A)	DO-214AA	1d	1k	Vs
MG	-	MURS340	Si-diode	U-fast Rectifier, 400V, 3A, Vf<1.25V(3A)	DO-214AB	1d	1k	Vs
MG	-	P6SMB51A	TVS	Vrwm=51V, Vbr=48.5..53.6V, 8.6A, 600W(1ms)	DO-214AA	1d	2j	Fag
MG	-	P6SMBJ28A	TVS	Vrwm=28V, Vbr=31.1..39.4V, 13.2A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MG	-	PZU3.9B2A	Zener diode	3.9V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MG	-	SMBG28A	TVS	Vrwm=28V, Vbr=31.1..35.8V, 13.2A, 600W(1ms)	DO-215AA	5d	1k	Vs
MG	-	SMBJ28A	TVS	Vrwm=28V, Vbr=31.1..35.8V, 13.2A, 600W(1ms)	DO-214AA	1d	1m	Di
MG	-	SMBJ28A	TVS	Vrwm=28V, Vbr=31.1..35.8V, 13.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
MG	-	SMF28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, 4.4A, 200W(1ms)	SOD-123FL	7d	1a	Eic
MG	-	SMF28CA	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, 4.41A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
MG	-	TV02W280B-G	TVS	Vrwm=28V, Vbr=31.1..34.4V, Ipp=4.41A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
MG	-	TV06B280J-G	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=13.22A, 600W(1ms)	DO-214AA	1d	1a	Cmc
MG7	-	SM6T33A	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, 13.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
MG7	-	SM6T33CA	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, 13.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
MGC	-	1SMB28CA	TVS	Vrwm=28V, 13.2A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MGC	-	SZ1SMB28CA	TVS	Vrwm=28V, 13.2A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MGJ	-	P6SMB51A	TVS	Vrwm=51V, Vbr=48.5..53.6V, 8.6A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MGK	-	SM15T150A	TVS	Vrwm=128V, Vbr=143..158V, 7.2A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MGK	-	SMB51A	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 8.56A, 600W(1ms)	DO-214AA	1d	1a	Lge
MGM	-	SMB45CA	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 8.56A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MGV	-	SM15T200A	TVS	Vrwm=171V, Vbr=190..210V, 5.5A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MGX	-	SM15T220A	TVS	Vrwm=188V, Vbr=209..231V, 4.6A, 1500W(1ms)	DO-214AB	1d	1q	Ste
MH	-	BZT52C2V4W	Zener diode	2.28..2.52V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1a	Jiy
MH	-	DDZ9711	Zener diode	27V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
MH	-	DDZ9711S	Zener diode	27V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
MH	-	DDZ9711T	Zener diode	27V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
MH	-	P6SMB56	TVS	Vrwm=56V, Vbr=53.2..58.8V, 7.4A, 600W(1ms)	DO-214AA	1d	2j	Fag
MH	-	P6SMBJ30	TVS	Vrwm=30V, Vbr=27..33V, 11.2A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MH	-	PZU30BA	Zener diode	30V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MH	-	SM6T22C	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, 20A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
MH	-	SMBG30	TVS	Vrwm=30V, Vbr=33.3..42.2V, 11.2A, 600W(1ms)	DO-215AA	5d	1k	Vs
MH	-	SMBJ30	TVS	Vrwm=30V, Vbr=33.3..42.2V, 11.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
MH	-	TV06B300K-G	TVS	Vrwm=30.0V, Vbr=33.30..40.70V, Ipp=11.21A, 600W(1ms)	DO-214AA	1d	1a	Cmc
MHJ	-	P6SMB56	TVS	Vrwm=56V, Vbr=53.2..58.8V, 7.4A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MHK	-	SMB56	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 7.45A, 600W(1ms)	DO-214AA	1d	1a	Lge
MHM	-	SMB56C	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 7.45A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MI	-	P4SMA250C	TVS	Vbr=237..263V, Vrwm=214V, 0.91A, 400W (1ms), Bidir.	DO-214AC	1ba	2k	Fag
MJ	-	BZT52C2V7W	Zener diode	2.57..2.84V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1a	Jiy
MJ	-	DDZ9712	Zener diode	28V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
MJ	-	DDZ9712S	Zener diode	28V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
MJ	-	DDZ9712T	Zener diode	28V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
MJ	-	MURS160	Si-diode	U-fast Rectifier, 600V, 1A, Vf<1.05V(1A)	DO-214AA	1d	1k	Vs
MJ	-	MURS260	Si-diode	U-fast Rectifier, 2A, Vf<1.2V(2A)	DO-214AA	1d	1k	Vs
MJ	-	MURS360	Si-diode	U-fast Rectifier, 600V, 3A, Vf<1.25V(3A)	DO-214AB	1d	1k	Vs
MJ	-	P4SMA250CA	TVS	Vbr=237..263V, Vrwm=214V, 0.91A, 400W (1ms), Bidir.	DO-214AC	1ba	2k	Fag
MK	-	1SMB30A	TVS	Vrwm=30V, 12.4A, 600W(1ms)	403A	3d	1s	Ons
MK	-	3.0SMB36A	Zener diode	33.30..38.30V, Zzt=22Ω, Izt=21mA, 3W	DO-214AA	1d	1b	Rul
MK	-	BZT52C3V0W	Zener diode	2.85..3.15V, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1a	Jiy
MK	-	CD214B-T30A	TVS	Vrwm=30V, Irsm=12.4A, 600W(1ms)	DO-214AA	1d	1a	Brn
MK	-	DDZ9713	Zener diode	30V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
MK	-	DDZ9713S	Zener diode	30V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
MK	-	DDZ9713T	Zener diode	30V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
MK	-	P6SMB56A	TVS	Vrwm=56V, Vbr=53.2..58.8V, 7.8A, 600W(1ms)	DO-214AA	1d	2j	Fag
MK	-	P6SMBJ30A	TVS	Vrwm=30V, Vbr=27..33V, 12.4A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MK	-	PZU33BA	Zener diode	33V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MK	-	SM6T22CA	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, 20A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde
MK	-	SMBG30A	TVS	Vrwm=30V, Vbr=33.1..38.3V, 12.4A, 600W(1ms)	DO-215AA	5d	1k	Vs
MK	-	SMBJ30A	TVS	Vrwm=30V, Vbr=33.1..38.3V, 12.4A, 600W(1ms)	DO-214AA	1d	1k	Vs
MK	-	SMBJ30A	TVS	Vrwm=30V, Vbr=33.1..38.3V, 12.4A, 600W(1ms)	DO-214AA	1d	1m	Di
MK	-	SMF30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, 4.1A, 200W(1ms)	SOD-123FL	7d	1a	Eic
MK	-	SMF30CA	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, 4.13A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
MK	-	TV02W300B-G	TVS	Vrwm=30V, Vbr=33.3..36.8V, Ipp=4.13A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
MK	-	TV06B300J-G	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=12.40A, 600W(1ms)	DO-214AA	1d	1a	Cmc
MK7	-	SM6T36A	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, 12A, 600W(1ms)	DO-214AA	1d	1k	Vs
MKC	-	1SMB30CA	TVS	Vrwm=30V, 12.4A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MKC	-	SZ1SMB30CA	TVS	Vrwm=30V, 12.4A, 600W(1ms), Bidir.	403C	3ba	2t	Ons

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
MKE	-	1PMT5.0A	TVS	Vrwm=5.0V, Vbr=6.4..7.0V, 19A, 175W(1ms)	DO-216AA	4d	1g	Mot
MKJ	-	P6SMB56A	TVS	Vrwm=56V, Vbr=53.2..58.8V, 7.8A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MKK	-	SMB56A	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 7.79A, 600W(1ms)	DO-214AA	1d	1a	Lge
MKM	-	1PMT7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.6V, 14.6A, 175W(1ms)	DO-216AA	4d	1g	Mot
MKM	-	SMB56CA	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 7.79A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
ML	-	DDZ9714	Zener diode	33V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
ML	-	DDZ9714S	Zener diode	33V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
ML	-	DDZ9714T	Zener diode	33V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
ML	-	P6SMB62	TVS	Vrwm=62V, Vbr=58.9..65.1V, 7.1A, 600W(1ms)	DO-214AA	1d	2j	Fag
ML	-	P6SMBJ33	TVS	Vrwm=33V, Vbr=29.7..36.3V, 10.2A, 600W(1ms)	DO-214AA	1d	1a	Pjt
ML	-	PZU36BA	Zener diode	36V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
ML	-	SM6T24C	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, 18A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
ML	-	SMBG33	TVS	Vrwm=33V, Vbr=36.7..46.5V, 10.2A, 600W(1ms)	DO-215AA	5d	1k	Vs
ML	-	SMBJ33	TVS	Vrwm=33V, Vbr=36.7..46.5V, 10.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
ML	-	TV06B330K-G	TVS	Vrwm=33.0V, Vbr=36.70..44.90V, Ipp=10.17A, 600W(1ms)	DO-214AA	1d	1a	Cmc
ML21	-	ML21PT	Si-diode	Rectifer, 50V, 2A	DO-214AC	1d	1a	Chm
ML22	-	ML22PT	Si-diode	Rectifer, 100V, 2A	DO-214AC	1d	1a	Chm
ML23	-	ML23PT	Si-diode	Rectifer, 200V, 2A	DO-214AC	1d	1a	Chm
ML24	-	ML24PT	Si-diode	Rectifer, 400V, 2A	DO-214AC	1d	1a	Chm
ML25	-	ML25PT	Si-diode	Rectifer, 600V, 2A	DO-214AC	1d	1a	Chm
ML26	-	ML26PT	Si-diode	Rectifer, 800V, 2A	DO-214AC	1d	1a	Chm
ML27	-	ML27PT	Si-diode	Rectifer, 1000V, 2A	DO-214AA	1d	1a	Chm
ML31	-	MCL31PT	Si-diode	Rectifer, 50V, 3A	DO-214AB	1d	1a	Chm
ML31	-	ML31PT	Si-diode	Rectifer, 50V, 3A	DO-214AA	1d	1a	Chm
ML32	-	MCL32PT	Si-diode	Rectifer, 100V, 3A	DO-214AB	1d	1a	Chm
ML32	-	ML32PT	Si-diode	Rectifer, 100V, 3A	DO-214AA	1d	1a	Chm
ML33	-	MCL33PT	Si-diode	Rectifer, 200V, 3A	DO-214AB	1d	1a	Chm
ML33	-	ML33PT	Si-diode	Rectifer, 200V, 3A	DO-214AA	1d	1a	Chm
ML34	-	MCL34PT	Si-diode	Rectifer, 400V, 3A	DO-214AB	1d	1a	Chm
ML34	-	ML34PT	Si-diode	Rectifer, 400V, 3A	DO-214AA	1d	1a	Chm
ML35	-	MCL35PT	Si-diode	Rectifer, 600V, 3A	DO-214AB	1d	1a	Chm
ML35	-	ML35PT	Si-diode	Rectifer, 600V, 3A	DO-214AA	1d	1a	Chm
ML36	-	MCL36PT	Si-diode	Rectifer, 800V, 3A	DO-214AB	1d	1a	Chm
ML36	-	ML36PT	Si-diode	Rectifer, 800V, 3A	DO-214AA	1d	1a	Chm
ML37	-	MCL37PT	Si-diode	Rectifer, 1000V, 3A	DO-214AB	1d	1a	Chm
ML37	-	ML37PT	Si-diode	Rectifer, 1000V, 3A	DO-214AA	1d	1a	Chm
ML51	-	MCL51PT	Si-diode	Rectifer, 50V, 5A	DO-214AB	1d	1a	Chm
ML52	-	MCL52PT	Si-diode	Rectifer, 100V, 5A	DO-214AB	1d	1a	Chm
ML53	-	MCL53PT	Si-diode	Rectifer, 200V, 5A	DO-214AB	1d	1a	Chm
ML54	-	MCL54PT	Si-diode	Rectifer, 400V, 5A	DO-214AB	1d	1a	Chm
ML55	-	MCL55PT	Si-diode	Rectifer, 600V, 5A	DO-214AB	1d	1a	Chm
ML56	-	MCL56PT	Si-diode	Rectifer, 800V, 5A	DO-214AB	1d	1a	Chm
ML57	-	MCL57PT	Si-diode	Rectifer, 1000V, 5A	DO-214AB	1d	1a	Chm
MLE	-	1PMT12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=8.8A, 175W(1ms)	DO-216AA	4d	1g	Mot
MLJ	-	P6SMB62	TVS	Vrwm=62V, Vbr=58.9..65.1V, 7.1A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MLK	-	SMB62	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 6.74A, 600W(1ms)	DO-214AA	1d	1a	Lge
MLM	-	SMB62C	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 6.74A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MLP	-	1PMT16A	TVS	Vrwm=16V, Vbr=17.8..19.7V, 7A, 175W(1ms)	DO-216AA	4d	1g	Mot
MLT	-	1PMT18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, 6A, 175W(1ms)	DO-216AA	4d	1g	Mot
MLX	-	1PMT22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, 4.9A, 175W(1ms)	DO-216AA	4d	1g	Mot
MLZ	-	1PMT24A	TVS	Vrwm=24V, Vbr=26.7..29.5, 4.5A, 175W(1ms)	DO-216AA	4d	1g	Mot
MM	-	1SMB33A	TVS	Vrwm=33V, 11.3A, 600W(1ms)	403A	3d	1s	Ons
MM	-	3.0SMB39A	Zener diode	36.70..42.20V, Zzt=28Ω, Izt=19mA, 3W	DO-214AA	1d	1b	Rul
MM	-	BZT52C3V3W	Zener diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 500mW	SOD-123	5d	1a	Jiy
MM	-	CD214B-T33A	TVS	Vrwm=33V, Irsm=11.3A, 600W(1ms)	DO-214AA	1d	1a	Brn
MM	-	DDZ9715	Zener diode	36V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
MM	-	DDZ9715S	Zener diode	36V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
MM	-	DDZ9715T	Zener diode	36V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
MM	-	P6SMB62A	TVS	Vrwm=62V, Vbr=58.9..65.1V, 7.1A, 600W(1ms)	DO-214AA	1d	2j	Fag
MM	-	P6SMBJ33A	TVS	Vrwm=33V, Vbr=29.7..36.3V, 11.3A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MM	-	PZU4.3BA	Zener diode	4.3V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MM	-	SM6T24CA	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, 18A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde
MM	-	SMA6J33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, Ipp=11.3A, 600W(1ms)	DO-214AC	1d	1a	Mco
MM	-	SMBG33A	TVS	Vrwm=33V, Vbr=36.7..42.2V, 11.3A, 600W(1ms)	DO-215AA	5d	1k	Vs
MM	-	SMBJ33A	TVS	Vrwm=33V, Vbr=36.7..42.2V, 11.3A, 600W(1ms)	DO-214AA	1d	1m	Di
MM	-	SMBJ33A	TVS	Vrwm=33V, Vbr=36.7..42.2V, 11.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
MM	-	SMF33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, 3.8A, 200W(1ms)	SOD-123FL	7d	1a	Eic
MM	-	SMF33CA	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, 3.75A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
MM	-	TV02W330B-G	TVS	Vrwm=33V, Vbr=36.7..40.6V, Ipp=3.75A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
MM	-	TV06B330J-G	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=11.26A, 600W(1ms)	DO-214AA	1d	1a	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
MM7	-	SM6T39A	TVS	Vrwm=33.3V, Vbr=37.1..41V, 11.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
MMC	-	1SMB33CA	TVS	Vrwm=33V, 11.3A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MMC	-	SZ1SMB33CA	TVS	Vrwm=33V, 11.3A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MME	-	1PMT26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, 4.2A, 175W(1ms)	DO-216AA	4d	1g	Mot
MMG	-	1PMT28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, 3.9A, 175W(1ms)	DO-216AA	4d	1g	Mot
MMJ	-	P6SMB62A	TVS	Vrwm=62V, Vbr=58.9..65.1V, 7.1A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MMK	-	1PMT30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, 3.6A, 175W(1ms)	DO-216AA	4d	1g	Mot
MMK	-	SMB62A	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 7.06A, 600W(1ms)	DO-214AA	1d	1a	Lge
MMM	-	1PMT33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, 3.3A, 175W(1ms)	DO-216AA	4d	1g	Mot
MMM	-	SMB62CA	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 7.06A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MMP	-	1PMT36A	TVS	Vrwm=36V, Vbr=40.0..44.2V, 3A, 175W(1ms)	DO-216AA	4d	1g	Mot
MMR	-	1PMT40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, 2.7A, 175W(1ms)	DO-216AA	4d	1g	Mot
MMX	-	1PMT48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, 2.3A, 175W(1ms)	DO-216AA	4d	1g	Mot
MMZ	-	1PMT51A	TVS	Vrwm=51V, Vbr=56.7..62.7V, 2.1A, 175W(1ms)	DO-216AA	4d	1g	Mot
MN	-	BZT52C3V6W	Zener diode	3.42..3.78V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1a	Jiy
MN	-	DDZ9716	Zener diode	39V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
MN	-	DDZ9716S	Zener diode	39V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
MN	-	DDZ9716T	Zener diode	39V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
MN	-	P6SMB68	TVS	Vrwm=68V, Vbr=64.6..71.4V, 6.5A, 600W(1ms)	DO-214AA	1d	2j	Fag
MN	-	P6SMBJ36	TVS	Vrwm=36V, Vbr=32.4..39.6V, 9.3A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MN	-	PZU4.3B1A	Zener diode	4.3V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MN	-	SM6T27C	TVS	Vrwm=23.1V, Vbr=25.7..28.4V, 16A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
MN	-	SMBG36	TVS	Vrwm=36V, Vbr=40.0..50.7V, 9.3A, 600W(1ms)	DO-215AA	5d	1k	Vs
MN	-	SMBJ36	TVS	Vrwm=36V, Vbr=40.0..50.7V, 9.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
MN	-	TV06B360K-G	TVS	Vrwm=36.0V, Vbr=40.0..48.90V, Ipp=9.33A, 600W(1ms)	DO-214AA	1d	1a	Cmc
MNG	-	1PMT58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, 1.9A, 175W(1ms)	DO-216AA	4d	1g	Mot
MNJ	-	P6SMB68	TVS	Vrwm=68V, Vbr=64.6..71.4V, 6.5A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MNK	-	SMB68	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 6.12A, 600W(1ms)	DO-214AA	1d	1a	Lge
MNM	-	SMB68C	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 6.12A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MO	-	DDZ9717	Zener diode	43V±5%, If=10mA, 500mW	SOD-123	5d	1d	Di
MO	-	DDZ9717S	Zener diode	43V±1%, If=10mA, 150mW	SOD-323	5d	1a	Di
MO	-	DDZ9717T	Zener diode	43V±1%, If=10mA, 150mW	SOD-523	6d	1a	Di
MP	-	1SMB36A	TVS	Vrwm=36V, 10.3A, 600W(1ms)	403A	3d	1s	Ons
MP	-	3.0SMB43A	Zener diode	40.0..46.0V, Zzt=33Ω, Izt=17mA, 3W	DO-214AA	1d	1b	Rul
MP	-	BZT52C3V9W	Zener diode	3.71..4.10V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1a	Jiy
MP	-	CD214B-T36A	TVS	Vrwm=36V, Irsm=10.3A, 600W(1ms)	DO-214AA	1d	1a	Brn
MP	-	KDZ20FVY	Zener diode	19.52..20.39V, Izt=5mA, Zzt=25Ω, 100mW	TFSC	7d	1a	Kec
MP	-	P6SMB68A	TVS	Vrwm=68V, Vbr=64.6..71.4V, 6.5A, 600W(1ms)	DO-214AA	1d	2j	Fag
MP	-	P6SMBJ36A	TVS	Vrwm=36V, Vbr=32.4..39.6V, 10.3A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MP	-	PZU4.3B2A	Zener diode	4.3V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MP	-	SM6T27CA	TVS	Vrwm=23.1V, Vbr=25.7..28.4V, 16A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde
MP	-	SMBG36A	TVS	Vrwm=36V, Vbr=40.0..46.0V, 10.3A, 600W(1ms)	DO-215AA	5d	1k	Vs
MP	-	SMBJ36A	TVS	Vrwm=36V, Vbr=40.0..46.0V, 10.3A, 600W(1ms)	DO-214AA	1d	1m	Di
MP	-	SMBJ36A	TVS	Vrwm=36V, Vbr=40.0..46.0V, 10.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
MP	-	SMF36A	TVS	Vrwm=36V, Vbr=40.0..44.2V, 3.4A, 200W(1ms)	SOD-123FL	7d	1a	Eic
MP	-	SMF36CA	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, 3.44A, 200W(10/1000μs), Bidir.	SOD-123FL	7ba	1j	Ers
MP	-	TV02W360B-G	TVS	Vrwm=36V, Vbr=40.0..44.2V, Ipp=3.44A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
MP	-	TV06B360J-G	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=10.33A, 600W(1ms)	DO-214AA	1d	1a	Cmc
MPC	-	1SMB36CA	TVS	Vrwm=36V, 10.3A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MPC	-	SZ1SMB36CA	TVS	Vrwm=36V, 10.3A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MPJ	-	P6SMB68A	TVS	Vrwm=68V, Vbr=64.6..71.4V, 6.5A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MPK	-	SMB68A	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 6.52A, 600W(1ms)	DO-214AA	1d	1a	Lge
MPM	-	SMB68CA	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 6.52A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MQ	-	P6SMB75	TVS	Vrwm=75V, Vbr=71.3..78.8V, 5.8A, 600W(1ms)	DO-214AA	1d	2j	Fag
MQ	-	P6SMBJ40	TVS	Vrwm=40V, Vbr=44.4..51.1V, 8.4A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MQ	-	SM6T30C	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, 14.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
MQ	-	SMBG40	TVS	Vrwm=40V, Vbr=44.4..56.3V, 8.4A, 600W(1ms)	DO-215AA	5d	1k	Vs
MQ	-	SMBJ40	TVS	Vrwm=40V, Vbr=44.4..56.3V, 8.4A, 600W(1ms)	DO-214AA	1d	1k	Vs
MQ	-	TV06B400K-G	TVS	Vrwm=40.0V, Vbr=44.40..54.30V, Ipp=8.40A, 600W(1ms)	DO-214AA	1d	2o	Cmc
MQJ	-	P6SMB75	TVS	Vrwm=75V, Vbr=71.3..78.8V, 5.8A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MQK	-	SMB75	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 5.56A, 600W(1ms)	DO-214AA	1d	1a	Lge
MQM	-	SMB75C	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 5.56A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MR	-	1SMB40A	TVS	Vrwm=40V, 9.3A, 600W(1ms)	403A	3d	1s	Ons
MR	-	3.0SMB47A	Zener diode	44.40..51.10V, Zzt=38Ω, Izt=16mA, 3W	DO-214AA	1d	1b	Rul
MR	-	BZT52C4V3W	Zener diode	4.09..4.52V, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1a	Jiy
MR	-	CD214B-T40A	TVS	Vrwm=40V, Irsm=9.3A, 600W(1ms)	DO-214AA	1d	1a	Brn
MR	-	P6SMB75A	TVS	Vrwm=75V, Vbr=71.3..78.8V, 5.8A, 600W(1ms)	DO-214AA	1d	2j	Fag
MR	-	P6SMBJ40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MR	-	PZU4.3B3A	Zener diode	4.3V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MR	-	SM6T30CA	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, 14.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
MR	-	SMBG40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms)	DO-215AA	5d	1k	Vs
MR	-	SMBJ40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms)	DO-214AA	1d	1m	Di
MR	-	SMBJ40A	TVS	Vrwm=40V, Vbr=44.4..51.1V, 9.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
MR	-	SMF40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, 3.1A, 200W(1ms)	SOD-123FL	7d	1a	Eic
MR	-	SMF40CA	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, 3.10A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
MR	-	TV02W400B-G	TVS	Vrwm=40V, Vbr=44.4..49.1V, Ipp=3.10A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
MR	-	TV06B400J-G	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=9.30A, 600W(1ms)	DO-214AA	1d	2o	Cmc
MRC	-	1SMB40CA	TVS	Vrwm=40V, 9.3A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MRC	-	SZ1SMB40CA	TVS	Vrwm=40V, 9.3A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MRJ	-	P6SMB75A	TVS	Vrwm=75V, Vbr=71.3..78.8V, 5.8A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MRK	-	SMB75A	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 5.83A, 600W(1ms)	DO-214AA	1d	1a	Lge
MRM	-	SMB75CA	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 5.83A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MS	-	P6SMB82	TVS	Vrwm=82V, Vbr=77.9..86.1V, 5.3A, 600W(1ms)	DO-214AA	1d	2j	Fag
MS	-	P6SMBJ43	TVS	Vrwm=43V, Vbr=38.7..47.3V, 7.8A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MS	-	PZU4.7BA	Zener diode	4.7V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MS	-	SM6T33C	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, 13.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
MS	-	SMBG43	TVS	Vrwm=43V, Vbr=47.8..60.5V, 7.8A, 600W(1ms)	DO-215AA	5d	1k	Vs
MS	-	SMBJ43	TVS	Vrwm=43V, Vbr=47.8..60.5V, 7.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
MS	-	TV06B430K-G	TVS	Vrwm=43.0V, Vbr=47.80..58.40V, Ipp=7.82A, 600W(1ms)	DO-214AA	1d	2o	Cmc
MS10	-	SS2H10	Si-diode	SBR, 100V, 2A, Vf<0.79V(2A)	DO-214AA	1d	1k	Vs
MS10	-	SS3H10	Si-diode	SBR, 90V, 3A, Vf<0.8V(3A)	DO-214AB	1d	1k	Vs
MS9	-	SS2H9	Si-diode	SBR, 90V, 2A, Vf<0.79V(2A)	DO-214AA	1d	1k	Vs
MS9	-	SS3H9	Si-diode	SBR, 100V, 3A, Vf<0.8V(3A)	DO-214AB	1d	1k	Vs
MSJ	-	P6SMB82	TVS	Vrwm=82V, Vbr=77.9..86.1V, 5.3A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MSK	-	SMB82	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 5.08A, 600W(1ms)	DO-214AA	1d	1a	Lge
MSM	-	SMB82C	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 5.08A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MT	-	1SMB43A	TVS	Vrwm=43V, 8.6A, 600W(1ms)	403A	3d	1s	Ons
MT	-	3.0SMB51A	Zener diode	47.80..54.90V, Zzt=45Ω, Izt=15mA, 3W	DO-214AA	1d	1b	Rul
MT	-	CD214B-T43A	TVS	Vrwm=43V, Irsm=8.6A, 600W(1ms)	DO-214AA	1d	1a	Brn
MT	-	P6SMB82A	TVS	Vrwm=82V, Vbr=77.9..86.1V, 5.3A, 600W(1ms)	DO-214AA	1d	2j	Fag
MT	-	P6SMBJ43A	TVS	Vrwm=43V, Vbr=38.7..47.3V, 8.6A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MT	-	PZU4.7B1A	Zener diode	4.7V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MT	-	SM6T33CA	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, 13.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde
MT	-	SMBG43A	TVS	Vrwm=43V, Vbr=47.8..54.9V, 8.6A, 600W(1ms)	DO-215AA	5d	1k	Vs
MT	-	SMBJ43A	TVS	Vrwm=43V, Vbr=47.8..54.9V, 8.6A, 600W(1ms)	DO-214AA	1d	1m	Di
MT	-	SMBJ43A	TVS	Vrwm=43V, Vbr=47.8..54.9V, 8.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
MT	-	SMF43A	TVS	Vrwm=43V, Vbr=47.8..52.8V, 2.9A, 200W(1ms)	SOD-123FL	7d	1a	Eic
MT	-	SMF43CA	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, 2.88A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
MT	-	TV02W430B-G	TVS	Vrwm=43V, Vbr=47.8..52.8V, Ipp=2.88A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
MT	-	TV06B430J-G	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=8.65A, 600W(1ms)	DO-214AA	1d	2o	Cmc
MTC	-	1SMB43CA	TVS	Vrwm=43V, 8.6A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MTC	-	SZ1SMB43CA	TVS	Vrwm=43V, 8.6A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MTJ	-	P6SMB82A	TVS	Vrwm=82V, Vbr=77.9..86.1V, 5.3A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MTK	-	SMB82A	TVS	Vbr=77.8..86.0V, Vrwm=70.1V, 5.31A, 600W(1ms)	DO-214AA	1d	1a	Lge
MTM	-	SMB82CA	TVS	Vbr=77.8..86.0V, Vrwm=70.1V, 5.31A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MU	-	P6SMB91	TVS	Vrwm=91V, Vbr=86.5..95.5V, 4.8A, 600W(1ms)	DO-214AA	1d	2j	Fag
MU	-	P6SMBJ45	TVS	Vrwm=45V, Vbr=50.0..63.3V, 7.5A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MU	-	PZU4.7B2A	Zener diode	4.7V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MU	-	SM6T36C	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, 12A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
MU	-	SMBG45	TVS	Vrwm=45V, Vbr=50.0..63.3V, 7.5A, 600W(1ms)	DO-215AA	5d	1k	Vs
MU	-	SMBJ45	TVS	Vrwm=45V, Vbr=50.0..63.3V, 7.5A, 600W(1ms)	DO-214AA	1d	1k	Vs
MU	-	TV06B450K-G	TVS	Vrwm=45.0V, Vbr=50.0..61.10V, Ipp=7.47A, 600W(1ms)	DO-214AA	1d	2o	Cmc
MUA	-	SM2T6V8A	TVS	Vrwm=5V, 20A, 200W(1ms)	DO-216AA	4d	1q	Ste
MUG	-	SM2T18A	TVS	Vrwm=16V, 20A, 200W(1ms)	DO-216AA	4d	1q	Ste
MUJ	-	P6SMB91	TVS	Vrwm=91V, Vbr=86.5..95.5V, 4.8A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MUJ	-	SM2T27A	TVS	Vrwm=24V, 20A, 200W(1ms)	DO-216AA	4d	1q	Ste
MUK	-	SMB91	TVS	Vbr=81.9..100V, Vrwm=73.7V, 4.58A, 600W(1ms)	DO-214AA	1d	1a	Lge
MUM	-	SMB91C	TVS	Vbr=81.9..100V, Vrwm=73.7V, 4.58A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MV	-	1SMB45A	TVS	Vrwm=45V, 8.3A, 600W(1ms)	403A	3d	1s	Ons
MV	-	3.0SMB56A	Zener diode	53.0..61.70V, Zzt=50Ω, Izt=13mA, 3W	DO-214AA	1d	1b	Rul
MV	-	CD214B-T45A	TVS	Vrwm=45V, Irsm=8.3A, 600W(1ms)	DO-214AA	1d	1a	Brn
MV	-	P6SMB91A	TVS	Vrwm=91V, Vbr=86.5..95.5V, 4.8A, 600W(1ms)	DO-214AA	1d	2j	Fag
MV	-	P6SMBJ45A	TVS	Vrwm=45V, Vbr=50.0..63.3V, 8.3A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MV	-	PZU4.7B3A	Zener diode	4.7V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MV	-	SM6T36CA	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, 12A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde
MV	-	SMBG45A	TVS	Vrwm=45V, Vbr=50.0..57.5V, 8.3A, 600W(1ms)	DO-215AA	5d	1k	Vs
MV	-	SMBJ45A	TVS	Vrwm=45V, Vbr=50.0..57.5V, 8.3A, 600W(1ms)	DO-214AA	1d	1m	Di
MV	-	SMBJ45A	TVS	Vrwm=45V, Vbr=50.0..57.5V, 8.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
MV	-	SMF45A	TVS	Vrwm=45V, Vbr=50.0..55.3V, 2.8A, 200W(1ms)	SOD-123FL	7d	1a	Eic
MV	-	SMF45CA	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, 2.75A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
MV	-	TV02W450B-G	TVS	Vrwm=45V, Vbr=50.0..55.3V, Ipp=2.75A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
MV	-	TV06B450J-G	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=8.25A, 600W(1ms)	DO-214AA	1d	2o	Cmc
MVC	-	1SMB45CA	TVS	Vrwm=45V, 8.3A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MVC	-	SZ1SMB45CA	TVS	Vrwm=45V, 8.3A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MVJ	-	P6SMB91A	TVS	Vrwm=91V, Vbr=86.5..95.5V, 4.8A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MVK	-	SMB91A	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 4.80A, 600W(1ms)	DO-214AA	1d	1a	Lge
MVM	-	SMB91CA	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 4.80A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MW	-	P6SMB100	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms)	DO-214AA	1d	2j	Fag
MW	-	P6SMBJ48	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MW	-	PZU5.1BA	Zener diode	5.1V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MW	-	SM6T39C	TVS	Vrwm=33.3V, Vbr=37.1..41V, 11.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
MW	-	SMBG48	TVS	Vrwm=48V, Vbr=53.3..67.5V, 7.0A, 600W(1ms)	DO-215AA	5d	1k	Vs
MW	-	SMBJ48	TVS	Vrwm=48V, Vbr=53.3..67.5V, 7.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
MW	-	TV06B480K-G	TVS	Vrwm=48.0V, Vbr=53.30..65.10V, Ipp=7.02A, 600W(1ms)	DO-214AA	1d	2o	Cmc
MWA	-	P4SMA200	TVS	Vbr=180..220V, Vrwm=162V, 1.5A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MWB	-	P4SMA200A	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MWC	-	P4SMA220	TVS	Vbr=198..242V, Vrwm=175V, 1.16A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MWD	-	P4SMA220A	TVS	Vbr=209..231V, Vrwm=185V, 1.22A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MWE	-	P4SMA250	TVS	Vbr=225..275V, Vrwm=202V, 1.11A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MWF	-	P4SMA250A	TVS	Vbr=237..263V, Vrwm=214V, 0.91A, 400W (1ms)	DO-214AC	1d	1a	Pjt
MWJ	-	P6SMB100	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MWK	-	SMB100	TVS	Vbr=90.0..110V, Vrwm=81.0V, 4.17A, 600W(1ms)	DO-214AA	1d	1a	Lge
MWM	-	SMB100C	TVS	Vbr=90.0..110V, Vrwm=81.0V, 4.17A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MX	-	1SMB48A	TVS	Vrwm=48V, 7.7A, 600W(1ms)	403A	3d	1s	Ons
MX	-	BZT52C4V7W	Zener diode	4.47..4.94V, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1a	Jiy
MX	-	CD214B-T48A	TVS	Vrwm=48V, Irsm=7.7A, 600W(1ms)	DO-214AA	1d	1a	Brn
MX	-	P6SMB100A	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms)	DO-214AA	1d	2j	Fag
MX	-	P6SMBJ48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MX	-	PZU5.1B1A	Zener diode	5.1V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MX	-	SM6T39CA	TVS	Vrwm=33.3V, Vbr=37.1..41V, 11.1A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde
MX	-	SMBG48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms)	DO-215AA	5d	1k	Vs
MX	-	SMBJ48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
MX	-	SMBJ48A	TVS	Vrwm=48V, Vbr=53.3..61.3V, 7.7A, 600W(1ms)	DO-214AA	1d	1m	Di
MX	-	SMF48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, 2.6A, 200W(1ms)	SOD-123FL	7d	1a	Eic
MX	-	SMF48CA	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, 2.58A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
MX	-	TV02W480B-G	TVS	Vrwm=48V, Vbr=53.3..58.9V, Ipp=2.58A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
MX	-	TV06B480J-G	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=7.75A, 600W(1ms)	DO-214AA	1d	2o	Cmc
MXA	-	P4SMA22	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 13.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXB	-	P4SMA22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXC	-	1SMB48CA	TVS	Vrwm=48V, 7.7A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MXC	-	P4SMA24	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 12.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXC	-	SZ1SMB48CA	TVS	Vrwm=48V, 7.7A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MXD	-	P4SMA24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXE	-	P4SMA27	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 11.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXF	-	P4SMA27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXG	-	P4SMA30	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 10.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXH	-	P4SMA30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXJ	-	P4SMA33	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 9.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXJ	-	P6SMB100A	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MXK	-	P4SMA33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXK	-	SMB100A	TVS	Vbr=95.0..105V, Vrwm=85.5V, 4.38A, 600W(1ms)	DO-214AA	1d	1a	Lge
MXL	-	P4SMA36	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 8.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXM	-	P4SMA36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXM	-	SMB100CA	TVS	Vbr=95.0..105V, Vrwm=85.5V, 4.38A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MXN	-	P4SMA39	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 7.4A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXP	-	P4SMA39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXQ	-	P4SMA43	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 6.8A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXR	-	P4SMA43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXS	-	P4SMA47	TVS	Vbr=42.3..51.7V, Vrwm=38.1V, 6.2A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXT	-	P4SMA47A	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.5A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXU	-	P4SMA51	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 5.7A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXV	-	P4SMA51A	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXW	-	P4SMA56	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 5.2A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXX	-	P4SMA56A	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXY	-	P4SMA62	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 4.7A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MXZ	-	P4SMA62A	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MY	-	BZT52C5V1W	Zener diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 500mW	SOD-123	5d	1a	Jiy
MY	-	KDZ5.6VVY	Zener diode	5.49..5.73V, Izt=5mA, Zzt=40Ω, 100mW	VSC	7d	1a	Kec
MY	-	P6SMB110	TVS	Vrwm=110V, Vbr=105..116V, 3.9A, 600W(1ms)	DO-214AA	1d	2j	Fag
MY	-	P6SMBJ51	TVS	Vrwm=51V, Vbr=45.9..56.1V, 6.6A, 600W(1ms)	DO-214AA	1d	1a	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
MY	-	PZU5.1B2A	Zener diode	5.1V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MY	-	SMBG51	TVS	Vrwm=51V, Vbr=56.7..71.8V, 6.6A, 600W(1ms)	DO-215AA	5d	1k	Vs
MY	-	SMBJ51	TVS	Vrwm=51V, Vbr=56.7..71.8V, 6.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
MY	-	TV06B510K-G	TVS	Vrwm=51.0V, Vbr=56.70..69.30V, Ipp=6.59A, 600W(1ms)	DO-214AA	1d	2o	Cmc
MYA	-	P4SMA68	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 4.3A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYB	-	P4SMA68A	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 4.6A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYC	-	P4SMA75	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 3.9A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYD	-	P4SMA75A	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYE	-	P4SMA82	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 3.6A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYF	-	P4SMA82A	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYG	-	P4SMA91	TVS	Vbr=81.9..100V, Vrwm=73.7V, 3.2A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYH	-	P4SMA91A	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYJ	-	P4SMA100	TVS	Vbr=90.0..110V, Vrwm=81.0V, 2.9A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYJ	-	P6SMB110	TVS	Vrwm=110V, Vbr=105..116V, 3.9A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MYK	-	P4SMA100A	TVS	Vbr=95.0..105V, Vrwm=85.5V, 3.1A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYK	-	SMB110	TVS	Vbr=99.0..121V, Vrwm=89.2V, 3.80A, 600W(1ms)	DO-214AA	1d	1a	Lge
MYL	-	P4SMA110	TVS	Vbr=99.0..121V, Vrwm=89.2V, 2.7A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYM	-	P4SMA110A	TVS	Vbr=105..116V, Vrwm=94V, 2.8A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYM	-	SMB110C	TVS	Vbr=99.0..121V, Vrwm=89.2V, 3.80A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MYN	-	P4SMA120	TVS	Vbr=108..132V, Vrwm=97.2V, 2.4A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYP	-	P4SMA120A	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYP	-	P4SMA130A	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYQ	-	P4SMA130	TVS	Vbr=117..143V, Vrwm=105V, 2.2A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYS	-	P4SMA150	TVS	Vbr=135..165V, Vrwm=121V, 2.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYT	-	P4SMA150A	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYU	-	P4SMA160	TVS	Vbr=144..176V, Vrwm=130V, 1.8A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYV	-	P4SMA160A	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYW	-	P4SMA170	TVS	Vbr=153..187V, Vrwm=138V, 1.7A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYX	-	P4SMA170A	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYY	-	P4SMA180	TVS	Vbr=162..198V, Vrwm=146V, 1.6A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MYZ	-	P4SMA180A	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZ	-	1SMB51A	TVS	Vrwm=51V, 7.3A, 600W(1ms)	403A	3d	1s	Ons
MZ	-	3.0SMB62A	Zener diode	56.70..65.20V, Zzt=55Ω, Izt=12mA, 3W	DO-214AA	1d	1b	Rul
MZ	-	BZT52B18S	Zener diode	17.64..18.36V, Izt=5mA, Zzt=45Ω, 200mW	SOD-323FL	7d	1a	Tsc
MZ	-	BZT52C5V6W	Zener diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1a	Jiy
MZ	-	CD214B-T51A	TVS	Vrwm=51V, Irsm=7.3A, 600W(1ms)	DO-214AA	1d	1a	Brn
MZ	-	MM3Z18VB	Zener diode	17.64..18.36V, Zzt=42Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
MZ	-	MM3Z18VBW	Zener diode	17.64..18.36V, Izt=5mA, Zzt=45Ω, 200mW	SOD-323FL	7d	1a	Tac
MZ	-	P6SMB110A	TVS	Vrwm=110V, Vbr=105..116V, 3.9A, 600W(1ms)	DO-214AA	1d	2j	Fag
MZ	-	P6SMBJ51A	TVS	Vrwm=51V, Vbr=45.9..56.1V, 7.3A, 600W(1ms)	DO-214AA	1d	1a	Pjt
MZ	-	PZU5.1B3A	Zener diode	5.1V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
MZ	-	SMBG51A	TVS	Vrwm=51V, Vbr=56.7..65.2V, 7.3A, 600W(1ms)	DO-215AA	5d	1k	Vs
MZ	-	SMBJ51A	TVS	Vrwm=51V, Vbr=56.7..65.2V, 7.3A, 600W(1ms)	DO-214AA	1d	1m	Di
MZ	-	SMBJ51A	TVS	Vrwm=51V, Vbr=56.7..65.2V, 7.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
MZ	-	SMF51A	TVS	Vrwm=51V, Vbr=56.7..62.7V, 2.4A, 200W(1ms)	SOD-123FL	7d	1a	Eic
MZ	-	SMF51CA	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, 2.43A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
MZ	-	TCMM3Z18VB	Zener diode	18V±2%, Izt=5mA, Zzt=42Ω, 200mW	SOD-323FL	7d	1a	Tac
MZ	-	TV02W510B-G	TVS	Vrwm=51V, Vbr=56.7..62.7V, Ipp=2.43A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
MZ	-	TV06B510J-G	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=7.28A, 600W(1ms)	DO-214AA	1d	2o	Cmc
MZA	-	P4SMA6.8	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 38.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZB	-	P4SMA6.8A	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 40.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZC	-	1SMB51CA	TVS	Vrwm=51V, 7.3A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MZC	-	P4SMA7.5	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 36.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZC	-	SZ1SMB51CA	TVS	Vrwm=51V, 7.3A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
MZD	-	P4SMA7.5A	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 37.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZE	-	P4SMA8.2	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 33.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZF	-	P4SMA8.2A	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 35.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZG	-	P4SMA9.1	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 30.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZH	-	P4SMA9.1A	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 31.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZJ	-	P4SMA10	TVS	Vbr=9.00..11.0V, Vrwm=8.10V, 28.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZJ	-	P6SMB110A	TVS	Vrwm=110V, Vbr=105..116V, 3.9A, 600W(1ms)	DO-214AA	1d	1u	Tsc
MZK	-	P4SMA10A	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 29.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZK	-	P4SMA11A	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 27.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZK	-	SMB110A	TVS	Vbr=105..116V, Vrwm=94V, 3.95A, 600W(1ms)	DO-214AA	1d	1a	Lge
MZL	-	P4SMA11	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 26.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZM	-	SMB110CA	TVS	Vbr=105..116V, Vrwm=94V, 3.95A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
MZMZW	-	P4SMA18	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 16.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZN	-	P4SMA12	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 24.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZP	-	P4SMA12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZQ	-	P4SMA13	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 22.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
MZR	-	P4SMA13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZS	-	P4SMA15	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, 19.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZT	-	P4SMA15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZU	-	P4SMA16	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 18.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZV	-	P4SMA16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZX	-	P4SMA18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZY	-	P4SMA20	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 14.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
MZZ	-	P4SMA20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15.0A, 400W(1ms)	DO-214AC	1d	1a	Pjt
N	-	BAR65-02V	PIN-diode	TV-Tuner, 30V, 100mA, Vf<1V(50mA), <0.9pF	SOD-523	6d	1a	Inf
n	-	BAT15-02V	Si-diode	Schottky, DBS-mix, 4V, 100mA, <12GHz, <0.35pF	SOD-523	6d	1a	Inf
N	-	BB181	C-diode	TV-VHF-tuning, VCO, 30V, 20mA, 0.7..8pF(1..28V)	SOD-523	6d	1a	Phi
N	-	CDZ12B	Zener diode	12V±2.5%, Izt=20mA, 1W	VMN	7d	1s	Rhm
N	-	HVU316	C-diode	BS/CS Tuning, 30V, 5.16..0.78pF(1..25V)	SOD-123	5d	1a	Ren
N	-	MA2S357	C-diode	CATV, 34V, 58/3.5pF(0/17V), 0.54Ω(470MHz)	SOD-523	6d	1a	Pan
N	-	MAZS047	Zener diode	4.4..5V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
n	-	MMSZ5234BPT	Zener diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 225mW	SOD-523	6d	1a	Chm
N	au	CH651S-40PT	Si-diode	SBD, 40V, 750mA, Vf<0.7V(750mA)	SOD-523	8d	1a	Chm
N	au	MMSZ5263BPT	Zener diode	56V±5%, Izt=2.2mA, Zzt=150Ω, 225mW	SOD-523	6d	1a	Chm
N-	-	MAZS0470GM	Zener diode	4.45..4.83V, Zzt=80Ω(5mA), 150mW	SSMini2	7d	1a	Pan
N-	-	MAZS0470M	Zener diode	4.59..4.83V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
n.	-	MMSZ5234SPT	Zener diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 225mW	SOD-523	6d	1a	Chm
N.	au	MMSZ5263SPT	Zener diode	56V±5%, Izt=2.2mA, Zzt=150Ω, 225mW	SOD-523	6d	1a	Chm
N.0	-	MMSZ5265C-V-G	Zener diode	62V±2%, Izt=2mA, Zzt=185Ω, 500mW	SOD-123	5d	1kb	Vs
N.6	-	MMSZ5261C-V-G	Zener diode	47V±2%, Izt=2.7mA, Zzt=105Ω, 500mW	SOD-123	5d	1kb	Vs
N.7	-	MMSZ5262C-V-G	Zener diode	51V±2%, Izt=2.5mA, Zzt=125Ω, 500mW	SOD-123	5d	1kb	Vs
N.8	-	MMSZ5263C-V-G	Zener diode	56V±2%, Izt=2.2mA, Zzt=150Ω, 500mW	SOD-123	5d	1kb	Vs
N.9	-	MMSZ5264C-V-G	Zener diode	60V±2%, Izt=2.1mA, Zzt=170Ω, 500mW	SOD-123	5d	1kb	Vs
N^	-	MAZS0470H	Zener diode	4.74..4.99V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
N_	-	MAZS0470GL	Zener diode	4.45..4.83V, Zzt=80Ω(5mA), 150mW	SSMini2	7d	1a	Pan
N_	-	MAZS0470L	Zener diode	4.45..4.69V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
N0	-	BZD27C3V6P-M	Zener diode	3.4..3.8V, Zzt=4Ω, Izt=100mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
N0	-	BZX384-B33	Zener diode	33V±2.5%, Izt=2mA, Zzt=35Ω, 200mW	SOD-323	5d	1a	Nxp
N0	-	CMOZ15L	Zener diode	14.25..15.75V, Izt=0.25mA, Zzt=100Ω, 250mW	SOD-523	6d	1a	Cen
N0	-	MMPZ5270BPT	Zener diode	86.45..95.55V, Izt=1.4mA, Zzt=400Ω, 225mW	SOD-323	5d	1a	Chm
N0	-	MMSZ5265B-V-G	Zener diode	62V±5%, Izt=2mA, Zzt=185Ω, 500mW	SOD-123	5d	1kb	Vs
N010	-	STBN010	TVS	Vbr=9.0..11.0V, Vrwm=8.10V, 100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N010	-	STUN010	TVS	Vbr=9.0..11.0V, Vrwm=8.10V, 100A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N011	-	STBN011	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 93.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N011	-	STUN011	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 93.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N012	-	STBN012	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 87.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N012	-	STUN012	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 87.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N013	-	STBN013	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 79.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N013	-	STUN013	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 79.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N015	-	STBN015	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, 68.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N015	-	STUN015	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, 68.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N016	-	STBN016	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 64.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N016	-	STUN016	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 64.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N018	-	STBN018	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 56.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N018	-	STUN018	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 56.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N020	-	STBN020	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 51.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N020	-	STUN020	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 51.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N022	-	STBN022	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 47.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N022	-	STUN022	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 47.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N024	-	STBN024	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 43.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N024	-	STUN024	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 43.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N027	-	STBN027	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 38.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N027	-	STUN027	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 38.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N030	-	STBN030	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 34.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N030	-	STUN030	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 34.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N033	-	STBN033	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 31.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N033	-	STUN033	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 31.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N036	-	STBN036	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 29.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N036	-	STUN036	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 29.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N039	-	STBN039	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 26.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N039	-	STUN039	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 26.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N043	-	STBN043	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 24.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N043	-	STUN043	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 24.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N047	-	STBN047	TVS	Vbr=42.3..51.7V, Vrwm=36.1V, 22.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N047	-	STUN047	TVS	Vbr=42.3..51.7V, Vrwm=36.1V, 22.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N051	-	STBN051	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 20.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
N051	-	STUN051	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 20.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N056	-	STBN056	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 18.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N056	-	STUN056	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 18.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N062	-	STBN062	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 1S.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N062	-	STUN062	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 1S.9A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N068	-	STBN068	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 15.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N068	-	STUN068	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 15.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N06I	-	STBN06I	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 139A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N06I	-	STUN06I	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 139A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N075	-	STBN075	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 13.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N075	-	STUN075	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 13.9A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N07F	-	STBN07F	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 128A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N07F	-	STUN07F	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 128A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N082	-	STBN082	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 12.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N082	-	STUN082	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 12.7A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N08C	-	STBN08C	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 120A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N08C	-	STUN08C	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 120A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N091	-	STBN091	TVS	Vbr=81.9..100V, Vrwm=73.7V, 11.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N091	-	STUN091	TVS	Vbr=81.9..100V, Vrwm=73.7V, 11.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N09B	-	STBN09B	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 109A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N09B	-	STUN09B	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 109A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N0B0	-	STBN0B0	TVS	Vbr=90.0..110V, Vrwm=81.0V, 10.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N0B0	-	STUN0B0	TVS	Vbr=90.0..110V, Vrwm=81.0V, 10.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N0B1	-	STBN0B1	TVS	Vbr=99.0..121V, Vrwm=8S.2V, 9.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N0B1	-	STUN0B1	TVS	Vbr=99.0..121V, Vrwm=8S.2V, 9.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N0B2	-	STBN0B2	TVS	Vbr=108..132V, Vrwm=97.2V, 8.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N0B2	-	STUN0B2	TVS	Vbr=108..132V, Vrwm=97.2V, 8.7A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N0B3	-	STBN0B3	TVS	Vbr=117..143V, Vrwm=105V, 8.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N0B3	-	STUN0B3	TVS	Vbr=117..143V, Vrwm=105V, 8.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N0B5	-	STBN0B5	TVS	Vbr=135..165V, Vrwm=121V, 7.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N0B5	-	STUN0B5	TVS	Vbr=135..165V, Vrwm=121V, 7.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N0B6	-	STBN0B6	TVS	Vbr=144..176V, Vrwm=130V, 6.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N0B6	-	STUN0B6	TVS	Vbr=144..176V, Vrwm=130V, 6.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N0B7	-	STBN0B7	TVS	Vbr=153..187V, Vrwm=138V, 6.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N0B7	-	STUN0B7	TVS	Vbr=153..187V, Vrwm=138V, 6.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N0B8	-	STBN0B8	TVS	Vbr=162..198V, Vrwm=146V, 5.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N0B8	-	STUN0B8	TVS	Vbr=162..198V, Vrwm=146V, 5.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N0D0	-	STBN0D0	TVS	Vbr=180..220V, Vrwm=162V, 5.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N0D0	-	STUN0D0	TVS	Vbr=180..220V, Vrwm=162V, 5.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N1	-	BZD27C160P	TVS	Vbr=153V, Vcl=205V, 0.48A, 150W(1ms)	SOD-123FL	7d	1a	Lge
N1	-	BZD27C3V9P-M	Zener diode	3.7..4.1V, Zzt=4Ω, Izt=100mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
N1	-	BZX384-B36	Zener diode	36V±2.5%, Izt=2mA, Zzt=35Ω, 200mW	SOD-323	5d	1a	Nxp
N1	-	CMOZ6L2	Zener diode	5.89..6.51V, Izt=0.25mA, Zzt=1200Ω, 250mW	SOD-523	6d	1a	Cen
N1	-	CZRH5261B-G	Zener diode	44.65..49.35V, Zzt=105Ω, Izt=2.7mA, 150mW	SOD-523	6d	1a	Cmc
N1	-	CZRV5261B-G	Zener diode	44.65..49.35V, Zzt=105Ω, Izt=2.7mA, 200mW	SOD-323	5d	1a	Cmc
N1	-	LMSZ5261BT1G	Zener diode	44.65..49.35V, Izt=2.7mA, 500mW	SOD-123	5d	1d	Lrc
N1	-	MM3Z5234B	Zener diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOD-323FL	7d	1a	Bts
N1	-	MM3Z5234BH	Zener diode	5.89..6.51V, Izt=20mA, Zzt=7Ω, 300mW	SOD-323	5d	1a	Zow
N1	-	MM3Z5261B	Zener diode	44.65..49.35V, Izt=2.7mA, Zzt=105Ω, 200mW	SOD-323	5d	1a	Ext
N1	-	MMBZ5261BV	Zener diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 200mW	SOD-523	6d	1a	Pjt
N1	-	MMSZ5261B-F	Zener diode	44.65..49.35V, Izt=2.7mA, 500mW	SOD-123F	7d	1a	Ttr
N1	-	MMSZ5261BWS	Zener diode	44.65..49.35V, Izt=2.7mA, 200mW	SOD-323F	7d	1a	Ttr
N1	-	OYD47VT1	Zener diode	44...50V, Izt=2.5mA, Zzt=150Ω, 500mW	SOD-123	5d	1a	Ouy
N1	-	PESD3V3S1UB	ESDP-diode	Vbr=3.3V, 18A, 330W(8/20 ms)	SOD-523	6d	1a	Phi
N10A	-	1KSMB6.8CA	TVS	Vrwm=5.80V, Vbr=6.45..7.14V, 95.2A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10A	-	1KSMBJ6.8	TVS	Vrwm=6.8V, Vbr=6.12..7.48V, 92.5A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10B	-	1KSMB7.5CA	TVS	Vrwm=6.40V, Vbr=7.13..7.88V, 88.5A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10B	-	1KSMBJ6.8A	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 95A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10C	-	1KSMB8.2CA	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, 82.6A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10C	-	1KSMBJ7.5	TVS	Vrwm=7.5V, Vbr=6.75..8.25V, 85A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10D	-	1KSMB9.1CA	TVS	Vrwm=7.78V, Vbr=8.65..9.55V, 74.6A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10D	-	1KSMBJ7.5A	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 88.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10E	-	1KSMB10CA	TVS	Vrwm=8.55V, Vbr=9.50..10.50V, 69.0A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10E	-	1KSMBJ8.2	TVS	Vrwm=8.2V, Vbr=7.38..9.02V, 80A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10F	-	1KSMB11CA	TVS	Vrwm=9.40V, Vbr=10.50..11.60V, 64.1A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10F	-	1KSMBJ8.2A	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 83.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10G	-	1KSMB12CA	TVS	Vrwm=10.20V, Vbr=11.40..12.60V, 59.9A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10G	-	1KSMBJ9.1	TVS	Vrwm=9.1V, Vbr=8.19..10V, 73.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10H	-	1KSMB13CA	TVS	Vrwm=11.10V, Vbr=12.40..13.70V, 54.9A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10H	-	1KSMBJ9.1A	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 75A, 1000W(1ms)	DO-214AA	1d	1p	Lif

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
N10I	-	1KSMB15CA	TVS	Vrwm=12.80V, Vbr=14.30..15.80V, 47.2A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10I	-	1KSMBJ10	TVS	Vrwm=10V, Vbr=9..11V, 66.7A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10J	-	1KSMB16CA	TVS	Vrwm=13.60V, Vbr=15.20..16.80V, 44.4A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10J	-	1KSMBJ10A	TVS	Vrwm=10V, Vbr=9.5..10.5V, 68.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10K	-	1KSMB18CA	TVS	Vrwm=15.30V, Vbr=17.10..18.90V, 39.2A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10K	-	1KSMBJ11	TVS	Vrwm=11V, Vbr=9.9..12.1V, 61.7A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10L	-	1KSMB20CA	TVS	Vrwm=17.10V, Vbr=19.0..21.0V, 36.1A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10L	-	1KSMBJ11A	TVS	Vrwm=11V, Vbr=10.5..11.6V, 63.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10M	-	1KSMB22CA	TVS	Vrwm=18.80V, Vbr=20.90..23.10V, 32.7A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10M	-	1KSMBJ12	TVS	Vrwm=12V, Vbr=10.8..13.2V, 58.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10N	-	1KSMB24CA	TVS	Vrwm=20.50V, Vbr=22.80..25.20V, 30.1A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10N	-	1KSMBJ12A	TVS	Vrwm=12V, Vbr=11.4..12.6V, 60A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10O	-	1KSMB27CA	TVS	Vrwm=23.10V, Vbr=25.70..28.40V, 26.7A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10O	-	1KSMBJ13	TVS	Vrwm=13V, Vbr=11.7..14.3V, 53.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10P	-	1KSMB30CA	TVS	Vrwm=25.60V, Vbr=28.50..31.50V, 24.2A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10P	-	1KSMBJ13A	TVS	Vrwm=13V, Vbr=12.4..13.7V, 55A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10Q	-	1KSMB33CA	TVS	Vrwm=28.20V, Vbr=31.40..34.70V, 21.9A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10Q	-	1KSMBJ15	TVS	Vrwm=15V, Vbr=13.5..16.5V, 45A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10R	-	1KSMB36CA	TVS	Vrwm=30.80V, Vbr=34.20..37.80V, 20.0A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10R	-	1KSMBJ15A	TVS	Vrwm=15V, Vbr=14.3..15.8V, 46.7A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10S	-	1KSMB39CA	TVS	Vrwm=33.30V, Vbr=37.10..41.0V, 18.6A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10S	-	1KSMBJ16	TVS	Vrwm=16V, Vbr=14.4..17.6V, 43.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10T	-	1KSMB43CA	TVS	Vrwm=36.80V, Vbr=40.90..45.20V, 16.9A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10T	-	1KSMBJ16A	TVS	Vrwm=16V, Vbr=15.2..16.8V, 45A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10U	-	1KSMB47CA	TVS	Vrwm=40.20V, Vbr=44.70..49.40V, 15.4A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10U	-	1KSMBJ18	TVS	Vrwm=18V, Vbr=16.2..19.8V, 38A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10V	-	1KSMB51CA	TVS	Vrwm=43.60V, Vbr=48.50..53.60V, 14.3A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10V	-	1KSMBJ18A	TVS	Vrwm=18V, Vbr=17.1..18.9V, 40A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10W	-	1KSMB56CA	TVS	Vrwm=47.80V, Vbr=53.20..58.80V, 13.0A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10W	-	1KSMBJ20	TVS	Vrwm=20V, Vbr=18..22V, 35A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10X	-	1KSMB62CA	TVS	Vrwm=53.0V, Vbr=58.90..65.10V, 11.8A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10X	-	1KSMBJ20A	TVS	Vrwm=20V, Vbr=19..21V, 36.7A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10Y	-	1KSMB68CA	TVS	Vrwm=58.10V, Vbr=64.60..71.40V, 10.9A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10Y	-	1KSMBJ22	TVS	Vrwm=22V, Vbr=19.8..24.2V, 31.7A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N10Z	-	1KSMB75CA	TVS	Vrwm=64.10V, Vbr=71.30..78.80V, 9.7A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
N10Z	-	1KSMBJ22A	TVS	Vrwm=22V, Vbr=20.9..23.1V, 33.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
N2	-	BZD27C180P	TVS	Vbr=168V, Vcl=229V, 0.43A, 150W(1ms)	SOD-123FL	7d	1a	Lge
N2	-	BZD27C4V3P-M	Zener diode	4..4.6V, Zzt=4Ω, Izt=100mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
N2	-	BZX384-B39	Zener diode	39V±2.5%, Izt=2mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Nxp
N2	-	CMOZ6L8	Zener diode	6.46..7.14V, Izt=0.25mA, Zzt=200Ω, 250mW	SOD-523	6d	1a	Cen
N2	-	CZRH5262B-G	Zener diode	48.45..53.55V, Zzt=125Ω, Izt=2.5mA, 150mW	SOD-523	6d	1a	Cmc
N2	-	CZRV5262B-G	Zener diode	48.45..53.55V, Zzt=125Ω, Izt=2.5mA, 200mW	SOD-323	5d	1a	Cmc
N2	-	LMSZ5262BT1G	Zener diode	48.45..53.55V, Izt=2.5mA, 500mW	SOD-123	5d	1d	Lrc
N2	-	MM3Z5256B	Zener diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 200mW	SOD-323FL	7d	1a	Bts
N2	-	MM3Z5256BH	Zener diode	28.5..31.5V, Izt=4.2mA, Zzt=49Ω, 300mW	SOD-323	5d	1a	Zow
N2	-	MM3Z5262B	Zener diode	48.45..53.55V, Izt=2.5mA, Zzt=125Ω, 200mW	SOD-323	5d	1a	Ext
N2	-	MMBZ5262BV	Zener diode	51V±5%, Izt=2.5mA, Zzt=125Ω, 200mW	SOD-523	6d	1a	Pjt
N2	-	MMSZ5262B-F	Zener diode	48.45..53.55V, Izt=2.5mA, 500mW	SOD-123F	7d	1a	Ttr
N2	-	MMSZ5262BWS	Zener diode	48.45..53.55V, Izt=2.5mA, 200mW	SOD-323F	7d	1a	Ttr
N2	-	OYD51VT1	Zener diode	48...54V, Izt=2.5mA, Zzt=180Ω, 500mW	SOD-123	5d	1a	Ouy
N2	-	PESD5V0S1UB	ESDP-diode	Vbr=5V, 15A, 260W(8/20 ms)	SOD-523	6d	1a	Phi
N3	-	BZD27C200P	TVS	Vbr=188V, Vcl=254V, 0.39A, 150W(1ms)	SOD-123FL	7d	1a	Lge
N3	-	BZD27C4V7P-M	Zener diode	4.4..5V, Zzt=3Ω, Izt=100mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
N3	-	BZX384-B43	Zener diode	43V±2.5%, Izt=2mA, Zzt=45Ω, 200mW	SOD-323	5d	1a	Nxp
N3	-	CMOZ7L5	Zener diode	7.12..7.88V, Izt=0.25mA, Zzt=200Ω, 250mW	SOD-523	6d	1a	Cen
N3	-	CZRH5263B-G	Zener diode	53.2..58.8V, Zzt=150Ω, Izt=2.2mA, 150mW	SOD-523	6d	1a	Cmc
N3	-	CZRV5263B-G	Zener diode	53.2..58.8V, Zzt=150Ω, Izt=2.2mA, 200mW	SOD-323	5d	1a	Cmc
N3	-	LMSZ5263BT1G	Zener diode	53.2..58.8V, Izt=2.2mA, 500mW	SOD-123	5d	1d	Lrc
N3	-	MM3Z5263B	Zener diode	53.20..58.80V, Izt=2.2mA, Zzt=150Ω, 200mW	SOD-323	5d	1a	Ext
N3	-	MMBZ5263BV	Zener diode	56V±5%, Izt=2.2mA, Zzt=150Ω, 200mW	SOD-523	6d	1a	Pjt
N3	-	MMSZ5263B-F	Zener diode	53.20..58.80V, Izt=2.2mA, 500mW	SOD-123F	7d	1a	Ttr
N3	-	OYD56VT1	Zener diode	52...60V, Izt=2.5mA, Zzt=180Ω, 500mW	SOD-123	5d	1a	Ouy
N3	-	PESD12VS1UB	ESDP-diode	Vbr=12V, 5A, 180W(8/20 ms)	SOD-523	6d	1a	Phi
N3	-	ZD5221BSG	Zener diode	2.4V±5%, 5mA, Zzt=100Ω, 500mW	SOD-323-S	7d	1a	Cys
N4	-	BZD27C5V1P-M	Zener diode	4.8..5.4V, Zzt=3Ω, Izt=100mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
N4	-	BZX384-B47	Zener diode	47V±2.5%, Izt=2mA, Zzt=50Ω, 200mW	SOD-323	5d	1a	Nxp
N4	-	CMOZ8L2	Zener diode	7.79..8.61V, Izt=0.25mA, Zzt=200Ω, 250mW	SOD-523	6d	1a	Cen
N4	-	CZRH5264B-G	Zener diode	57..63V, Zzt=170Ω, Izt=2.1mA, 150mW	SOD-523	6d	1a	Cmc
N4	-	CZRV5264B-G	Zener diode	57..63V, Zzt=170Ω, Izt=2.1mA, 200mW	SOD-323	5d	1a	Cmc
N4	-	LMSZ5264BT1G	Zener diode	57..63V, Izt=2.1mA, 500mW	SOD-123	5d	1d	Lrc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
N4	-	MM1Z5234B	Zener diode	5.89..6.51V, Izt=20mA, Zzt=7Ω, 500mW	SOD-323FL	7d	1a	Eic
N4	-	MM1Z5234BH	Zener diode	5.89..6.51V, Izt=20mA, Zzt=7Ω, 500mW	SOD-123	5d	1a	Zow
N4	-	MM3Z5264B	Zener diode	57.0..63.0V, Izt=2.1mA, Zzt=170Ω, 200mW	SOD-323	5d	1a	Ext
N4	-	MMBZ5264BV	Zener diode	60V±5%, Izt=2.1mA, Zzt=170Ω, 200mW	SOD-523	6d	1a	Pjt
N4	-	MMSZ5234B	Zener diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123	5d	1a	Eic
N4	-	MMSZ5264B-F	Zener diode	57.0..63.0V, Izt=2.1mA, 500mW	SOD-123F	7d	1a	Ttr
N4	-	PESD15VS1UB	ESDP-diode	Vrwm=15V, 5A, 160W(8/20 ms)	SOD-523	6d	1a	Phi
N4	-	RKZ33BKK	Zener diode	31.0..35.0V, Izt=2mA, Zzt=80Ω, 150mW	SFP	7d	1a	Ren
N4	-	RKZ33BKL	Zener diode	31.0..35.0V, Izt=2mA, Zzt=80Ω, 100mW	EFP	7d	1a	Ren
N4	-	ZD5223BSG	Zener diode	2.7V±5%, 5mA, Zzt=100Ω, 500mW	SOD-323-S	7d	1a	Cys
N5	-	BZD27C5V6P-M	Zener diode	5.2..6V, Zzt=2Ω, Izt=100mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
N5	-	BZX384-B51	Zener diode	51V±2.5%, Izt=2mA, Zzt=60Ω, 200mW	SOD-323	5d	1a	Nxp
N5	-	BZX584B20V	Zener diode	19.60..20.40V, Izt=5mA, Zzt=55Ω, 200mW	SOD-523FL	7d	1a	Tac
N5	-	CMOZ9L1	Zener diode	8.65..9.56V, Izt=0.25mA, Zzt=200Ω, 250mW	SOD-523	6d	1a	Cen
N5	-	CZRH5265B-G	Zener diode	58.9..65.1V, Zzt=185Ω, Izt=2mA, 150mW	SOD-523	6d	1a	Cmc
N5	-	CZRV5265B-G	Zener diode	58.9..65.1V, Zzt=185Ω, Izt=2mA, 200mW	SOD-323	5d	1a	Cmc
N5	-	LMSZ5265BT1G	Zener diode	58.9..65.1V, Izt=2mA, 500mW	SOD-123	5d	1d	Lrc
N5	-	MM1Z5256B	Zener diode	28.50..31.50V, Izt=4.2mA, Zzt=49Ω, 500mW	SOD-323FL	7d	1a	Eic
N5	-	MM1Z5256BH	Zener diode	28.5..31.5V, Izt=4.2mA, Zzt=49Ω, 500mW	SOD-123	5d	1a	Zow
N5	-	MM3Z5265B	Zener diode	58.90..65.10V, Izt=2.0mA, Zzt=185Ω, 200mW	SOD-323	5d	1a	Ext
N5	-	MM5Z20VB	Zener diode	19.60..20.40V, Izt=5mA, Zzt=55Ω, 200mW	SOD-523FL	7d	1a	Tac
N5	-	MMBZ5265BV	Zener diode	62V±5%, Izt=2.0mA, Zzt=185Ω, 200mW	SOD-523	6d	1a	Pjt
N5	-	MMSZ5256B	Zener diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 500mW	SOD-123	5d	1a	Eic
N5	-	MMSZ5265B-F	Zener diode	58.90..65.10V, Izt=2.0mA, 500mW	SOD-123F	7d	1a	Ttr
N5	-	OYD62VT1	Zener diode	58...66V, Izt=2.5mA, Zzt=200Ω, 500mW	SOD-123	5d	1a	Ouy
N5	-	PESD24VS1UB	ESDP-diode	Vbr=24V, 3A, 160W(8/20 ms)	SOD-523	6d	1a	Phi
N5	-	RKZ36BKK	Zener diode	34.0..38.0V, Izt=2mA, Zzt=90Ω, 150mW	SFP	7d	1a	Ren
N5	-	RKZ36BKL	Zener diode	34.0..38.0V, Izt=2mA, Zzt=90Ω, 100mW	EFP	7d	1a	Ren
N510	-	STBN510	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 103A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N510	-	STUN510	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 103A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N511	-	STBN511	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 96.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N511	-	STUN511	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 96.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N512	-	STBN512	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 90.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N512	-	STUN512	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 90.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N513	-	STBN513	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 82.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N513	-	STUN513	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 82.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N515	-	STBN515	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 71.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N515	-	STUN515	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 71.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N516	-	STBN516	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 67.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N516	-	STUN516	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 67.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N518	-	STBN518	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 59.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N518	-	STUN518	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 59.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N520	-	STUN520	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 54.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N522	-	STBN522	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 49.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N522	-	STUN522	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 49.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N524	-	STBN524	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 45.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N524	-	STUN524	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 45.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N527	-	STBN527	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 40.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N527	-	STUN527	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 40.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N52O	-	STBN52O	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 54.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N530	-	STBN530	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 36.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N530	-	STUN530	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 36.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N533	-	STBN533	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 33.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N533	-	STUN533	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 33.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N536	-	STBN536	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 30.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N536	-	STUN536	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 30.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N539	-	STBN539	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 28.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N539	-	STUN539	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 28.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N543	-	STBN543	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 25.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N543	-	STUN543	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 25.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N547	-	STBN547	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 23.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N547	-	STUN547	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 23.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N551	-	STBN551	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 21.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N551	-	STUN551	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 21.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N556	-	STBN556	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 19.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N556	-	STUN556	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 19.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N562	-	STBN562	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 17.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N562	-	STUN562	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 17.7A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N568	-	STBN568	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 16.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N568	-	STUN568	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 16.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
N56I	-	STBN56I	TVS	Vbr=5.45..7.14V, Vrwm=5.80V, 143A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N56I	-	STUN56I	TVS	Vbr=5.45..7.14V, Vrwm=5.80V, 143A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N575	-	STBN575	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 14.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N575	-	STUN575	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 14.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N57F	-	STBN57F	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 132A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N57F	-	STUN57F	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 132A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N582	-	STBN582	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 13.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N582	-	STUN582	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 13.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N58C	-	STBN58C	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 124A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N58C	-	STUN58C	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 124A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N591	-	STBN591	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 12.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N591	-	STUN591	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 12.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N59B	-	STBN59B	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 112A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N59B	-	STUN59B	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 112A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N5B0	-	STBN5B0	TVS	Vbr=95.0..105V, Vrwm=85.5V, 11.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N5B0	-	STUN5B0	TVS	Vbr=95.0..105V, Vrwm=85.5V, 11.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N5B1	-	STBN5B1	TVS	Vbr=105..116V, Vrwm=94V, 9.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N5B1	-	STUN5B1	TVS	Vbr=105..116V, Vrwm=94V, 9.9A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N5B2	-	STBN5B2	TVS	Vbr=114..126V, Vrwm=102V, 9.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N5B2	-	STUN5B2	TVS	Vbr=114..126V, Vrwm=102V, 9.1A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N5B3	-	STBN5B3	TVS	Vbr=124..137V, Vrwm=111V, 8.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N5B3	-	STUN5B3	TVS	Vbr=124..137V, Vrwm=111V, 8.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N5B5	-	STBN5B5	TVS	Vbr=143..158V, Vrwm=128V, 7.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N5B5	-	STUN5B5	TVS	Vbr=143..158V, Vrwm=128V, 7.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N5B6	-	STBN5B6	TVS	Vbr=152..168V, Vrwm=136V, 6.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N5B6	-	STUN5B6	TVS	Vbr=152..168V, Vrwm=136V, 6.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N5B7	-	STBN5B7	TVS	Vbr=162..179V, Vrwm=145V, 6.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N5B7	-	STUN5B7	TVS	Vbr=162..179V, Vrwm=145V, 6.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N5B8	-	STBN5B8	TVS	Vbr=171..189V, Vrwm=154V, 6.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N5B8	-	STUN5B8	TVS	Vbr=171..189V, Vrwm=154V, 6.1A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N5D0	-	STBN5D0	TVS	Vbr=190..210V, Vrwm=171V, 5.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
N5D0	-	STUN5D0	TVS	Vbr=190..210V, Vrwm=171V, 5.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
N6	-	BZD27C6V2P-M	Zener diode	5.8..6.6V, Zzt=2Ω, Izt=100mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
N6	-	BZX384-B56	Zener diode	56V±2.5%, Izt=2mA, Zzt=70Ω, 200mW	SOD-323	5d	1a	Nxp
N6	-	CMOZ10L	Zener diode	9.50..10.50V, Izt=0.25mA, Zzt=200Ω, 250mW	SOD-523	6d	1a	Cen
N6	-	MMSZ5261B-V-G	Zener diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 500mW	SOD-123	5d	1kb	Vs
N6	-	ZD5225BSG	Zener diode	3.0V±5%, 5mA, Zzt=95Ω, 500mW	SOD-323-S	7d	1a	Cys
N7	-	BZD27C6V8P-M	Zener diode	6.4..7.2V, Zzt=1Ω, Izt=100mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
N7	-	BZX384-B62	Zener diode	62V±2.5%, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Nxp
N7	-	CMOZ11L	Zener diode	10.45..11.55V, Izt=0.25mA, Zzt=200Ω, 250mW	SOD-523	6d	1a	Cen
N7	-	MMSZ5262B-V-G	Zener diode	51V±5%, Izt=2.5mA, Zzt=125Ω, 500mW	SOD-123	5d	1kb	Vs
N8	-	BZD27C7V5P-M	Zener diode	7..7.9 1V, Zzt=2Ω, Izt=100mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
N8	-	BZT52C9V1WT	Zener diode	8.65..9.56V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Ttr
N8	-	BZX384-B68	Zener diode	68V±2.5%, Izt=2mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Nxp
N8	-	CMOZ12L	Zener diode	11.40..12.60V, Izt=0.25mA, Zzt=200Ω, 250mW	SOD-523	6d	1a	Cen
N8	-	MM5Z9V1	Zener diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Eic
N8	-	MM5Z9V1H	Zener diode	8.5..9.6V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Zow
N8	-	MMSZ5263B-V-G	Zener diode	56V±5%, Izt=2.2mA, Zzt=150Ω, 500mW	SOD-123	5d	1kb	Vs
N9	-	BZD27C8V2P-M	Zener diode	7.7..8.7V, Zzt=1Ω, Izt=100mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
N9	-	BZX384-B75	Zener diode	75V±2.5%, Izt=2mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Nxp
N9	-	CMOZ13L	Zener diode	12.35..13.65V, Izt=0.25mA, Zzt=200Ω, 250mW	SOD-523	6d	1a	Cen
N9	-	MM3Z5249B	Zener diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 200mW	SOD-323FL	7d	1a	Bts
N9	-	MM3Z5249BH	Zener diode	18.05..19.95V, Izt=6.6mA, Zzt=23Ω, 300mW	SOD-323	5d	1a	Zow
N9	-	MMSZ5264B-V-G	Zener diode	60V±5%, Izt=2.1mA, Zzt=170Ω, 500mW	SOD-123	5d	1kb	Vs
NA	-	BZT52C6V2W	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 500mW	SOD-123	5d	1a	Jiy
NA	-	P4SMA130CA	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
NA	-	TV06B800K-G	TVS	Vrwm=80.0V, Vbr=88.96..108.80V, Ipp=4.19A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NB	-	BZT52C6V8W	Zener diode	6.46..7.14V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1a	Jiy
NB	-	KDZ6.2B	Zener diode	6.2V±2.5%, 40mA, 1W	PMDU	7d	1s	Rhm
NB	-	P4SMA150CA	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
NB	-	SMF80CA	TVS	Vrwm=80.0V, Vbr=88.80..97.60V, 1.55A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
NB	-	TV02W800B-G	TVS	Vrwm=80V, Vbr=88.8..97.6V, Ipp=1.55A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
NB	-	TV06B800J-G	TVS	Vrwm=80.0V, Vbr=98.80..97.60V, Ipp=4.63A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NC	-	BZT52C7V5W	Zener diode	7.11..7.86V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1a	Jiy
NC	-	P4SMA160CA	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
NC	-	PZU3.6B1A/DG	Zener diode	3.6V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
ND	-	BZT52C8V2W	Zener diode	7.79..8.61V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1a	Jiy
ND	-	P6SMB120	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms)	DO-214AA	1d	2j	Fag
ND	-	P6SMBJ54	TVS	Vrwm=54V, Vbr=60.0..76.0V, 6.2A, 600W(1ms)	DO-214AA	1d	1a	Pjt
ND	-	PZU3.6B2A/DG	Zener diode	3.6V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
ND	-	SMBG54	TVS	Vrwm=54V, Vbr=60.0..76.0V, 6.2A, 600W(1ms)	DO-215AA	5d	1k	Vs
ND	-	SMBJ54	TVS	Vrwm=54V, Vbr=60.0..76.0V, 6.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
ND	-	TV06B540K-G	TVS	Vrwm=54.0V, Vbr=60.0..73.30V, Ipp=6.23A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NDJ	-	P6SMB120	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms)	DO-214AA	1d	1u	Tsc
NDK	-	SMB120	TVS	Vbr=108..132V, Vrwm=97.2V, 3.47A, 600W(1ms)	DO-214AA	1d	1a	Lge
NDM	-	SMB120C	TVS	Vbr=108..132V, Vrwm=97.2V, 3.47A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
NE	-	1SMB54A	TVS	Vrwm=54V, 6.9A, 600W(1ms)	403A	3d	1s	Ons
NE	-	BZT52C9V1W	Zener diode	8.65..9.56V, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1a	Jiy
NE	-	CD214B-T54A	TVS	Vrwm=54V, Irsm=6.9A, 600W(1ms)	DO-214AA	1d	1a	Brn
NE	-	P6SMB120A	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms)	DO-214AA	1d	2j	Fag
NE	-	P6SMBJ54A	TVS	Vrwm=54V, Vbr=60.0..76.0V, 600W(1ms)	DO-214AA	1d	1a	Pjt
NE	-	PZU3.9BA/DG	Zener diode	3.9V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NE	-	SMBG54A	TVS	Vrwm=54V, Vbr=60.0..69.0V, 6.9A, 600W(1ms)	DO-215AA	5d	1k	Vs
NE	-	SMBJ54A	TVS	Vrwm=54V, Vbr=60.0..69.0V, 6.9A, 600W(1ms)	DO-214AA	1d	1k	Vs
NE	-	SMBJ54A	TVS	Vrwm=54V, Vbr=60.0..69.0V, 6.9A, 600W(1ms)	DO-214AA	1d	1m	Di
NE	-	SMF54A	TVS	Vrwm=54V, Vbr=60.0..66.3V, 2.3A, 200W(1ms)	SOD-123FL	7d	1a	Eic
NE	-	SMF54CA	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, 2.30A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
NE	-	SMF5V0A-M	ESDP-diode	Vbr=6.4V, Vrwm=5V, Ipp=21.7A, 200W(1ms)	SMF	7d	2y	Vs
NE	-	TV02W540B-G	TVS	Vrwm=54V, Vbr=60.0..66.3V, Ipp=2.30A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
NE	-	TV06B540J-G	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=6.89A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NEC	-	1SMB54CA	TVS	Vrwm=54V, 6.9A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
NEC	-	SZ1SMB54CA	TVS	Vrwm=54V, 6.9A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
NEJ	-	P6SMB120A	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms)	DO-214AA	1d	1u	Tsc
NEK	-	SMB120A	TVS	Vbr=114..126V, Vrwm=102V, 3.64A, 600W(1ms)	DO-214AA	1d	1a	Lge
NEM	-	SMB120CA	TVS	Vbr=114..126V, Vrwm=102V, 3.64A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
NF	-	BZT52C10W	Zener diode	9.50..10.50V, Izt=5mA, Zzt=20Ω, 500mW	SOD-123	5d	1a	Jiy
NF	-	KDZ22FV	Zener diode	20.80..23.30V, Izt=5mA, Zzt=30Ω, 100mW	TFSC	7d	1a	Kec
NF	-	MAZD160	Zener diode	15.3..17.1V, Zzt=50Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
NF	-	P6SMB130	TVS	Vrwm=130V, Vbr=124..137V, 3.4A, 600W(1ms)	DO-214AA	1d	2j	Fag
NF	-	P6SMBJ58	TVS	Vrwm=58V, Vbr=64.4..81.6V, 5.8A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NF	-	PZU3.9B1A/DG	Zener diode	3.9V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NF	-	SMBG58	TVS	Vrwm=58V, Vbr=64.4..81.6V, 5.8A, 600W(1ms)	DO-215AA	5d	1k	Vs
NF	-	SMBJ58	TVS	Vrwm=58V, Vbr=64.4..81.6V, 5.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
NF	-	TV06B580K-G	TVS	Vrwm=58.0V, Vbr=64.40..78.70V, Ipp=5.83A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NFJ	-	P6SMB130	TVS	Vrwm=130V, Vbr=124..137V, 3.4A, 600W(1ms)	DO-214AA	1d	1u	Tsc
NFK	-	SMB130	TVS	Vbr=117..143V, Vrwm=105V, 3.21A, 600W(1ms)	DO-214AA	1d	1a	Lge
NFM	-	SMB130C	TVS	Vbr=117..143V, Vrwm=105V, 3.21A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
NG	-	1SMB58A	TVS	Vrwm=58V, 6.4A, 600W(1ms)	403A	3d	1s	Ons
NG	-	3.0SMB68A	Zener diode	64.40..74.10V, Zzt=70Ω, Izt=11mA, 3W	DO-214AA	1d	1b	Rul
NG	-	CD214B-T58A	TVS	Vrwm=58V, Irsm=6.4A, 600W(1ms)	DO-214AA	1d	1a	Brn
NG	-	P6SMB130A	TVS	Vrwm=130V, Vbr=124..137V, 3.4A, 600W(1ms)	DO-214AA	1d	2j	Fag
NG	-	P6SMBJ58A	TVS	Vrwm=58V, Vbr=64.4..81.6V, 6.4A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NG	-	PZU3.9B2A/DG	Zener diode	3.9V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NG	-	SMBG58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, 6.4A, 600W(1ms)	DO-215AA	5d	1k	Vs
NG	-	SMBJ58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, 6.4A, 600W(1ms)	DO-214AA	1d	1m	Di
NG	-	SMBJ58A	TVS	Vrwm=58V, Vbr=64.4..74.1V, 6.4A, 600W(1ms)	DO-214AA	1d	1k	Vs
NG	-	SMF58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, 2.1A, 200W(1ms)	SOD-123FL	7d	1a	Eic
NG	-	SMF58CA	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, 2.14A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
NG	-	SMF6V0A-M	ESDP-diode	Vbr=6.67V, Vrwm=6V, Ipp=19.4A, 200W(1ms)	SMF	7d	2y	Vs
NG	-	TV02W580B-G	TVS	Vrwm=58V, Vbr=64.4..71.2V, Ipp=2.14A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
NG	-	TV06B580J-G	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=6.41A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NG7	-	SM6T68A	TVS	Vrwm=58.1V, Vbr=64.6..71.40V, 6.5A, 600W(1ms), Bidir.	DO-214AA	1d	1k	Vs
NG7	-	SM6T68CA	TVS	Vrwm=58.1V, Vbr=64.6..71.40V, 6.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
NGC	-	1SMB58CA	TVS	Vrwm=58V, 6.4A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
NGC	-	SZ1SMB58CA	TVS	Vrwm=58V, 6.4A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
NGJ	-	P6SMB130A	TVS	Vrwm=130V, Vbr=124..137V, 3.4A, 600W(1ms)	DO-214AA	1d	1u	Tsc
NGK	-	SMB130A	TVS	Vbr=124..137V, Vrwm=111V, 3.35A, 600W(1ms)	DO-214AA	1d	1a	Lge
NGM	-	SMB130CA	TVS	Vbr=124..137V, Vrwm=111V, 3.35A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
NH	-	BZT52C11W	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 500mW	SOD-123	5d	1a	Jiy
NH	-	P6SMB150	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms)	DO-214AA	1d	2j	Fag
NH	-	P6SMBJ60	TVS	Vrwm=60V, Vbr=66.7..84.5V, 5.6A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NH	-	PZU30BA/DG	Zener diode	30V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NH	-	SMBG60	TVS	Vrwm=60V, Vbr=66.7..84.5V, 5.6A, 600W(1ms)	DO-215AA	5d	1k	Vs
NH	-	SMBJ60	TVS	Vrwm=60V, Vbr=66.7..84.5V, 5.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
NH	-	TV06B600K-G	TVS	Vrwm=60.0V, Vbr=66.70..81.50V, Ipp=5.61A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NHJ	-	P6SMB150	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms)	DO-214AA	1d	1u	Tsc
NHK	-	SMB150	TVS	Vbr=135..165V, Vrwm=121V, 2.79A, 600W(1ms)	DO-214AA	1d	1a	Lge
NHM	-	SMB150C	TVS	Vbr=135..165V, Vrwm=121V, 2.79A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
NI	-	P4SMA170CA	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
NJ	-	BZT52C12W	Zener diode	11.40..12.60V, Izt=5mA, Zzt=25Ω, 500mW	SOD-123	5d	1a	Jiy

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
NK	-	1SMB60A	TVS	Vrwm=60V, 6.2A, 600W(1ms)	403A	3d	1s	Ons
NK	-	BZT52C13W	Zener diode	12.35..13.65V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Jiy
NK	-	CD214B-T60A	TVS	Vrwm=60V, Irsm=6.2A, 600W(1ms)	DO-214AA	1d	1a	Brn
NK	-	P6SMB150A	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms)	DO-214AA	1d	2j	Fag
NK	-	P6SMBJ60A	TVS	Vrwm=60V, Vbr=66.7..84.5V, 6.2A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NK	-	PZU33BA/DG	Zener diode	33V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NK	-	SMBG60A	TVS	Vrwm=60V, Vbr=66.7..76.7V, 6.2A, 600W(1ms)	DO-215AA	5d	1k	Vs
NK	-	SMBJ60A	TVS	Vrwm=60V, Vbr=66.7..76.7V, 6.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
NK	-	SMBJ60A	TVS	Vrwm=60V, Vbr=66.7..76.7V, 6.2A, 600W(1ms)	DO-214AA	1d	1m	Di
NK	-	SMF60A	TVS	Vrwm=60V, Vbr=66.7..73.7V, 1.8A, 200W(1ms)	SOD-123FL	7d	1a	Eic
NK	-	SMF60CA	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, 2.07A, 200W(10/1000μs), Bidir.	SOD-123FL	7ba	1j	Ers
NK	-	SMF6V5A-M	ESDP-diode	Vbr=7.22V, Vrwm=6.5V, Ipp=17.9A, 200W(1ms)	SMF	7d	2y	Vs
NK	-	TV02W600B-G	TVS	Vrwm=60V, Vbr=66.7..73.7V, Ipp=2.07A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
NK	-	TV06B600J-G	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=6.20A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NKC	-	1SMB60CA	TVS	Vrwm=60V, 6.2A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
NKC	-	SZ1SMB60CA	TVS	Vrwm=60V, 6.2A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
NKJ	-	P6SMB150A	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms)	DO-214AA	1d	1u	Tsc
NKK	-	SMB150A	TVS	Vbr=143..158V, Vrwm=128V, 2.90A, 600W(1ms)	DO-214AA	1d	1a	Lge
NKM	-	SMB150CA	TVS	Vbr=143..158V, Vrwm=128V, 2.90A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
NL	-	P6SMB160	TVS	Vrwm=160V, Vbr=152..168V, 2.7A, 600W(1ms)	DO-214AA	1d	2j	Fag
NL	-	P6SMBJ64	TVS	Vrwm=64V, Vbr=71.1..90.1V, 5.3A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NL	-	SMBG64	TVS	Vrwm=64V, Vbr=71.1..90.1V, 5.3A, 600W(1ms)	DO-215AA	5d	1k	Vs
NL	-	SMBJ64	TVS	Vrwm=64V, Vbr=71.1..90.1V, 5.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
NL	-	TV06B640K-G	TVS	Vrwm=64.0V, Vbr=71.10..86.90V, Ipp=5.26A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NLJ	-	P6SMB160	TVS	Vrwm=160V, Vbr=152..168V, 2.7A, 600W(1ms)	DO-214AA	1d	1u	Tsc
NLK	-	SMB160	TVS	Vbr=144..176V, Vrwm=130V, 2.61A, 600W(1ms)	DO-214AA	1d	1a	Lge
NLM	-	SMB160C	TVS	Vbr=144..176V, Vrwm=130V, 2.61A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
NM	-	1SMB64A	TVS	Vrwm=64V, 5.8A, 600W(1ms)	403A	3d	1s	Ons
NM	-	3.0SMB75A	Zener diode	71.10..81.80V, Zzt=85Ω, Izt=10mA, 3W	DO-214AA	1d	1b	Rul
NM	-	BZT52C15W	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1a	Jiy
NM	-	CD214B-T64A	TVS	Vrwm=64V, Irsm=5.8A, 600W(1ms)	DO-214AA	1d	1a	Brn
NM	-	P6SMB160A	TVS	Vrwm=160V, Vbr=152..168V, 2.7A, 600W(1ms)	DO-214AA	1d	2j	Fag
NM	-	P6SMBJ64A	TVS	Vrwm=64V, Vbr=71.1..90.1V, 5.8A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NM	-	PZU4.3BA/DG	Zener diode	4.3V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NM	-	SMBG64A	TVS	Vrwm=64V, Vbr=71.1..81.8V, 5.8A, 600W(1ms)	DO-215AA	5d	1k	Vs
NM	-	SMBJ64A	TVS	Vrwm=64V, Vbr=71.1..81.8V, 5.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
NM	-	SMBJ64A	TVS	Vrwm=64V, Vbr=71.1..81.8V, 5.8A, 600W(1ms)	DO-214AA	1d	1m	Di
NM	-	SMF64A	TVS	Vrwm=64V, Vbr=71.1..78.6V, 1.7A, 200W(1ms)	SOD-123FL	7d	1a	Eic
NM	-	SMF64CA	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, 1.94A, 200W(10/1000μs), Bidir.	SOD-123FL	7ba	1j	Ers
NM	-	SMF7V0A-M	ESDP-diode	Vbr=7.78V, Vrwm=7V, Ipp=16.7A, 200W(1ms)	SMF	7d	2y	Vs
NM	-	TV02W640B-G	TVS	Vrwm=64V, Vbr=71.1..78.6V, Ipp=1.94A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
NM	-	TV06B640J-G	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=5.83A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NMC	-	1SMB64CA	TVS	Vrwm=64V, 5.8A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
NMC	-	SZ1SMB64CA	TVS	Vrwm=64V, 5.8A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
NMJ	-	P6SMB160A	TVS	Vrwm=160V, Vbr=152..168V, 2.7A, 600W(1ms)	DO-214AA	1d	1u	Tsc
NMK	-	SMB160A	TVS	Vbr=152..168V, Vrwm=136V, 2.74A, 600W(1ms)	DO-214AA	1d	1a	Lge
NMM	-	SMB160CA	TVS	Vbr=152..168V, Vrwm=136V, 2.74A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
NN	-	BZT52C16W	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1a	Jiy
NN	-	P6SMB170	TVS	Vrwm=170V, Vbr=162..179V, 2.6A, 600W(1ms)	DO-214AA	1d	2j	Fag
NN	-	P6SMBJ70	TVS	Vrwm=70V, Vbr=77.8..98.6V, 4.8A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NN	-	PZU4.3B1A/DG	Zener diode	4.3V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NN	-	SMBG70	TVS	Vrwm=70V, Vbr=77.8..98.6V, 4.8A, 600W(1ms)	DO-215AA	5d	1k	Vs
NN	-	SMBJ70	TVS	Vrwm=70V, Vbr=77.8..98.6V, 4.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
NN	-	TV06B700K-G	TVS	Vrwm=70.0V, Vbr=77.80..95.10V, Ipp=4.80A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NNJ	-	P6SMB170	TVS	Vrwm=170V, Vbr=162..179V, 2.6A, 600W(1ms)	DO-214AA	1d	1u	Tsc
NNK	-	SMB170	TVS	Vbr=153..187V, Vrwm=138V, 2.46A, 600W(1ms)	DO-214AA	1d	1a	Lge
NNM	-	SMB170C	TVS	Vbr=153..187V, Vrwm=138V, 2.46A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
NO	-	P4SMA180CA	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
NP	-	1SMB70A	TVS	Vrwm=70V, 5.3A, 600W(1ms)	403A	3d	1s	Ons
NP	-	3.0SMB82A	Zener diode	77.80..89.50V, Zzt=95Ω, Izt=9.1mA, 3W	DO-214AA	1d	1b	Rul
NP	-	BZT52C18W	Zener diode	17.10..18.90V, Izt=5mA, Zzt=45Ω, 500mW	SOD-123	5d	1a	Jiy
NP	-	CD214B-T70A	TVS	Vrwm=70V, Irsm=5.3A, 600W(1ms)	DO-214AA	1d	1a	Brn
NP	-	CMDZ5L6	Zener diode	5.320..5.880V, Izt=0.5mA, Zzt=325Ω, 250mW	SOD-323	5d	1a	Cen
NP	-	KDZ22FVY	Zener diode	21.54..22.47V, Izt=5mA, Zzt=30Ω, 100mW	TFSC	7d	1a	Kec
NP	-	P6SMB170A	TVS	Vrwm=170V, Vbr=162..179V, 2.6A, 600W(1ms)	DO-214AA	1d	2j	Fag
NP	-	P6SMBJ70A	TVS	Vrwm=70V, Vbr=77.8..98.6V, 5.3A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NP	-	PZU4.3B2A/DG	Zener diode	4.3V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NP	-	SM6T68C	TVS	Vrwm=58.1V, Vbr=64.6..71.40V, 6.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
NP	-	SMBG70A	TVS	Vrwm=70V, Vbr=77.8..89.5V, 5.3A, 600W(1ms)	DO-215AA	5d	1k	Vs
NP	-	SMBJ70A	TVS	Vrwm=70V, Vbr=77.8..89.5V, 5.3A, 600W(1ms)	DO-214AA	1d	1k	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
NP	-	SMBJ70A	TVS	Vrwm=70V, Vbr=77.8..89.5V, 5.3A, 600W(1ms)	DO-214AA	1d	1m	Di
NP	-	SMF70A	TVS	Vrwm=70V, Vbr=77.8..86.0V, 1.5A, 200W(1ms)	SOD-123FL	7d	1a	Eic
NP	-	SMF70CA	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, 1.77A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
NP	-	SMF7V5A-M	ESDP-diode	Vbr=8.33V, Vrwm=7.5V, Ipp=15.5A, 200W(1ms)	SMF	7d	2y	Vs
NP	-	TV02W700B-G	TVS	Vrwm=70V, Vbr=77.8..86.0V, Ipp=1.77A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
NP	-	TV06B700J-G	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=5.31A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NPC	-	1SMB70CA	TVS	Vrwm=70V, 5.3A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
NPC	-	SZ1SMB70CA	TVS	Vrwm=70V, 5.3A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
NPJ	-	P6SMB170A	TVS	Vrwm=170V, Vbr=162..179V, 2.6A, 600W(1ms)	DO-214AA	1d	1u	Tsc
NPK	-	SMB170A	TVS	Vbr=162..179V, Vrwm=145V, 2.56A, 600W(1ms)	DO-214AA	1d	1a	Lge
NPM	-	SMB170CA	TVS	Vbr=162..179V, Vrwm=145V, 2.56A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
NPX	-	SMBT70A	TVS	Vrwm=70V, 100A, 600W(1ms)	DO-214AC	1d	1m	Di
NQ	-	P6SMB180	TVS	Vrwm=180V, Vbr=171 189V, 2.4A, 600W(1ms)	DO-214AA	1d	2j	Fag
NQ	-	P6SMBJ75	TVS	Vrwm=75V, Vbr=67.5..82.5V, 4.5A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NQ	-	SM6T68CA	TVS	Vrwm=58.1V, Vbr=64.6..71.40V, 6.5A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde
NQ	-	SMBG75	TVS	Vrwm=75V, Vbr=83.3..105.7V, 4.5A, 600W(1ms)	DO-215AA	5d	1k	Vs
NQ	-	SMBJ75	TVS	Vrwm=75V, Vbr=83.3..105.7V, 4.5A, 600W(1ms)	DO-214AA	1d	1k	Vs
NQ	-	TV06B750K-G	TVS	Vrwm=75.0V, Vbr=83.30..102.0V, Ipp=4.48A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NQJ	-	P6SMB180	TVS	Vrwm=180V, Vbr=171 189V, 2.4A, 600W(1ms)	DO-214AA	1d	1u	Tsc
NQK	-	SMB180	TVS	Vbr=162..198V, Vrwm=146V, 2.33A, 600W(1ms)	DO-214AA	1d	1a	Lge
NQM	-	SMB180C	TVS	Vbr=162..198V, Vrwm=146V, 2.33A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
NR	-	1SMB75A	TVS	Vrwm=75V, 4.9A, 600W(1ms)	403A	3d	1s	Ons
NR	-	BZT52C20W	Zener diode	19.0..21.0V, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1a	Jiy
NR	-	CD214B-T75A	TVS	Vrwm=75V, Irsm=4.9A, 600W(1ms)	DO-214AA	1d	1a	Brn
NR	-	P6SMB180A	TVS	Vrwm=180V, Vbr=171 189V, 2.4A, 600W(1ms)	DO-214AA	1d	2j	Fag
NR	-	P6SMBJ75A	TVS	Vrwm=75V, Vbr=67.5..82.5V, 4.9A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NR	-	PZU4.3B3A/DG	Zener diode	4.3V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NR	-	SMBG75A	TVS	Vrwm=75V, Vbr=83.3..95.8V, 4.9A, 600W(1ms)	DO-215AA	5d	1k	Vs
NR	-	SMBJ75A	TVS	Vrwm=75V, Vbr=83.3..95.8V, 4.9A, 600W(1ms)	DO-214AA	1d	1m	Di
NR	-	SMBJ75A	TVS	Vrwm=75V, Vbr=83.3..95.8V, 4.9A, 600W(1ms)	DO-214AA	1d	1k	Vs
NR	-	SMF75A	TVS	Vrwm=75V, Vbr=83.3..92.1V, 1.4A, 200W(1ms)	SOD-123FL	7d	1a	Eic
NR	-	SMF75CA	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, 1.65A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
NR	-	SMF8V0A-M	ESDP-diode	Vbr=8.89V, Vrwm=8V, Ipp=14.7A, 200W(1ms)	SMF	7d	2y	Vs
NR	-	TV02W750B-G	TVS	Vrwm=75V, Vbr=83.3..92.1V, Ipp=1.65A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
NR	-	TV06B750J-G	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=4.96A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NRC	-	1SMB75CA	TVS	Vrwm=75V, 4.9A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
NRC	-	SZ1SMB75CA	TVS	Vrwm=75V, 4.9A, 600W(1ms), Bidir.	403C	3ba	2t	Ons
NRJ	-	P6SMB180A	TVS	Vrwm=180V, Vbr=171 189V, 2.4A, 600W(1ms)	DO-214AA	1d	1u	Tsc
NRK	-	SMB180A	TVS	Vbr=171..189V, Vrwm=154V, 2.44A, 600W(1ms)	DO-214AA	1d	1a	Lge
NRM	-	SMB180CA	TVS	Vbr=171..189V, Vrwm=154V, 2.44A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
NS	-	P6SMB200	TVS	Vrwm=200V, Vbr=190..210V, 2.2A, 600W(1ms)	DO-214AA	1d	2j	Fag
NS	-	P6SMBJ78	TVS	Vrwm=78V, Vbr=86.7..109.8V, 4.3A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NS	-	PZU4.7BA/DG	Zener diode	4.7V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NS	-	SMBG78	TVS	Vrwm=58V, Vbr=86.7..109.8V, 4.3A, 600W(1ms)	DO-215AA	5d	1k	Vs
NS	-	SMBJ78	TVS	Vrwm=58V, Vbr=86.7..109.8V, 4.3A, 600W(1ms)	DO-214AA	1d	1k	Vs
NS	-	TV06B780K-G	TVS	Vrwm=78.0V, Vbr=86.70..106.0V, Ipp=4.32A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NSJ	-	P6SMB200	TVS	Vrwm=200V, Vbr=190..210V, 2.2A, 600W(1ms)	DO-214AA	1d	1u	Tsc
NSK	-	SMB200	TVS	Vbr=180..220V, Vrwm=162V, 2.09A, 600W(1ms)	DO-214AA	1d	1a	Lge
NSM	-	SMB200C	TVS	Vbr=180..220V, Vrwm=162V, 2.09A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
NT	-	1SMB78A	TVS	Vrwm=78V, 4.7A, 600W(1ms)	403A	3d	1s	Ons
NT	-	3.0SMB91A	Zener diode	86.70..99.70V, Zzt=115Ω, Izt=8.2mA, 3W	DO-214AA	1d	1b	Rul
NT	-	CD214B-T78A	TVS	Vrwm=78V, Irsm=4.7A, 600W(1ms)	DO-214AA	1d	1a	Brn
NT	-	P6SMB200A	TVS	Vrwm=200V, Vbr=190..210V, 2.2A, 600W(1ms)	DO-214AA	1d	2j	Fag
NT	-	P6SMBJ78A	TVS	Vrwm=78V, Vbr=86.7..109.8V, 4.7A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NT	-	PZU4.7B1A/DG	Zener diode	4.7V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NT	-	SMBG78A	TVS	Vrwm=58V, Vbr=86.7..99.7V, 4.7A, 600W(1ms)	DO-215AA	5d	1k	Vs
NT	-	SMBJ78A	TVS	Vrwm=58V, Vbr=86.7..99.7V, 4.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
NT	-	SMBJ78A	TVS	Vrwm=58V, Vbr=86.7..99.7V, 4.7A, 600W(1ms)	DO-214AA	1d	1m	Di
NT	-	SMF78A	TVS	Vrwm=78V, Vbr=86.7..95.8V, 1.4A, 200W(1ms)	SOD-123FL	7d	1a	Eic
NT	-	SMF78CA	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, 1.59A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
NT	-	SMF8V5A-M	ESDP-diode	Vbr=9.44V, Vrwm=8.5V, Ipp=13.9A, 200W(1ms)	SMF	7d	2y	Vs
NT	-	TV02W780B-G	TVS	Vrwm=78V, Vbr=86.7..95.8V, Ipp=1.59A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
NT	-	TV06B780J-G	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=4.76A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NTJ	-	P6SMB200A	TVS	Vrwm=200V, Vbr=190..210V, 2.2A, 600W(1ms)	DO-214AA	1d	1u	Tsc
NTK	-	SMB200A	TVS	Vbr=190..210V, Vrwm=171V, 2.19A, 600W(1ms)	DO-214AA	1d	1a	Lge
NTM	-	SMB200CA	TVS	Vbr=190..210V, Vrwm=171V, 2.19A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Lge
NU	-	P6SMB220	TVS	Vrwm=220V, Vbr=209..231V, 1.83A, 600W(1ms)	DO-214AA	1d	2j	Fag
NU	-	P6SMBJ85	TVS	Vrwm=85V, Vbr=94.4..119.2V, 3.9A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NU	-	PZU4.7B2A/DG	Zener diode	4.7V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NU	-	SMBG85	TVS	Vrwm=85V, Vbr=94.4..119.2V, 3.9A, 600W(1ms)	DO-215AA	5d	1k	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
NU	-	SMBJ85	TVS	Vrwm=85V, Vbr=94.4..119.2V, 3.9A, 600W(1ms)	DO-214AA	1d	1k	Vs
NU	-	TV06B850K-G	TVS	Vrwm=85.0V, Vbr=94.40..115.0V, Ipp=3.97A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NUE	-	SM2T14A	TVS	Vrwm=12V, 20A, 200W(1ms)	DO-216AA	4d	1q	Ste
NUJ	-	P6SMB220	TVS	Vrwm=220V, Vbr=209..231V, 1.83A, 600W(1ms)	DO-214AA	1d	1u	Tsc
NV	-	1SMB85A	TVS	Vrwm=85V, 4.4A, 600W(1ms)	403A	3d	1s	Ons
NV	-	3.0SMB100A	Zener diode	94.40..108.20V, Zzt=160Ω, Izt=7.5mA, 3W	DO-214AA	1d	1b	Rul
NV	-	CD214B-T85A	TVS	Vrwm=85V, Irsm=4.4A, 600W(1ms)	DO-214AA	1d	1a	Brn
NV	-	P6SMB220A	TVS	Vrwm=220V, Vbr=209..231V, 1.83A, 600W(1ms)	DO-214AA	1d	2j	Fag
NV	-	P6SMBJ85A	TVS	Vrwm=85V, Vbr=94.4..119.2V, 4.4A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NV	-	PZU4.7B3A/DG	Zener diode	4.7V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NV	-	SMBG85A	TVS	Vrwm=85V, Vbr=94.4..108.2V, 4.4A, 600W(1ms)	DO-215AA	5d	1k	Vs
NV	-	SMBJ85A	TVS	Vrwm=85V, Vbr=94.4..108.2V, 4.4A, 600W(1ms)	DO-214AA	1d	1m	Di
NV	-	SMBJ85A	TVS	Vrwm=85V, Vbr=94.4..108.2V, 4.4A, 600W(1ms)	DO-214AA	1d	1k	Vs
NV	-	SMF85A	TVS	Vrwm=85V, Vbr=94.4..104V, 1.3A, 200W(1ms)	SOD-123FL	7d	1a	Eic
NV	-	SMF85CA	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, 1.46A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
NV	-	SMF9V0A-M	ESDP-diode	Vbr=10.0V, Vrwm=9V, Ipp=13.5A, 200W(1ms)	SMF	7d	2y	Vs
NV	-	TV02W850B-G	TVS	Vrwm=85V, Vbr=94.4..104V, Ipp=1.46A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
NV	-	TV06B850J-G	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=4.38A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NV7	-	SM6T100A	TVS	Vrwm=85.5V, Vbr=95..105V, 4.4A, 600W(1ms)	DO-214AA	1d	1k	Vs
NV7	-	SM6T100CA	TVS	Vrwm=85.5V, Vbr=95..105V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
NVJ	-	P6SMB220A	TVS	Vrwm=220V, Vbr=209..231V, 1.83A, 600W(1ms)	DO-214AA	1d	1u	Tsc
NW	-	P6SMB250	TVS	Vbr=237..263V, Vrwm=214V, 1.75A, 600W(1ms)	DO-214AA	1d	2j	Fag
NW	-	P6SMBJ90	TVS	Vrwm=90V, Vbr=100..115.5V, 3.8A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NW	-	PZU5.1BA/DG	Zener diode	5.1V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NW	-	SMBG90	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms)	DO-215AA	5d	1k	Vs
NW	-	SMBJ90	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
NW	-	TV06B900K-G	TVS	Vrwm=90V, Vbr=100.0..122.0V, Ipp=3.75A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NWA	-	P4SMA200C	TVS	Vbr=180..220V, Vrwm=162V, 1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NWB	-	P4SMA200CA	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NWC	-	P4SMA220C	TVS	Vbr=198..242V, Vrwm=175V, 1.16A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NWD	-	P4SMA220CA	TVS	Vbr=209..231V, Vrwm=185V, 1.22A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NWE	-	P4SMA250C	TVS	Vbr=225..275V, Vrwm=202V, 1.11A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NWF	-	P4SMA250CA	TVS	Vbr=237..263V, Vrwm=214V, 1.16A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NX	-	1SMB90A	TVS	Vrwm=90V, 4.1A, 600W(1ms)	403A	3d	1s	Ons
NX	-	3.0SMB110A	Zener diode	100.0..115.50V, Zzt=225Ω, Izt=6.8mA, 3W	DO-214AA	1d	1b	Rul
NX	-	BZT52C22W	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1a	Jiy
NX	-	CD214B-T90A	TVS	Vrwm=90V, Irsm=4.1A, 600W(1ms)	DO-214AA	1d	1a	Brn
NX	-	P6SMB250A	TVS	Vbr=237..263V, Vrwm=214V, 1.75A, 600W(1ms)	DO-214AA	1d	2j	Fag
NX	-	P6SMBJ90A	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NX	-	PZU5.1B1A/DG	Zener diode	5.1V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NX	-	SM6T100C	TVS	Vrwm=85.5V, Vbr=95..105V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
NX	-	SMBG90A	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms)	DO-215AA	5d	1k	Vs
NX	-	SMBJ90A	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms)	DO-214AA	1d	1m	Di
NX	-	SMBJ90A	TVS	Vrwm=90V, Vbr=100..115.5V, 4.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
NX	-	SMF10A-M	ESDP-diode	Vbr=11.1V, Vrwm=10V, Ipp=11.8A, 200W(1ms)	SMF	7d	2y	Vs
NX	-	SMF90A	TVS	Vrwm=90V, Vbr=100..111V, 1.2A, 200W(1ms)	SOD-123FL	7d	1a	Eic
NX	-	SMF90CA	TVS	Vrwm=90V, Vbr=100.0..111.0V, 1.37A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
NX	-	TV02W900B-G	TVS	Vrwm=90V, Vbr=100..111V, Ipp=1.3A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
NX	-	TV06B900J-G	TVS	Vrwm=90V, Vbr=100.0..111.0V, Ipp=4.11A, 600W(1ms)	DO-214AA	1d	2o	Cmc
NXA	-	P4SMA22C	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 13.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXB	-	P4SMA22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXC	-	P4SMA24C	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 12.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXD	-	P4SMA24CA	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXE	-	P4SMA27C	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 11.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXF	-	P4SMA27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXG	-	P4SMA30C	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 10.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXH	-	P4SMA30CA	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXJ	-	P4SMA33C	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 9.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXK	-	P4SMA33CA	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXL	-	P4SMA36C	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 8.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXM	-	P4SMA36CA	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXN	-	P4SMA39C	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 7.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXP	-	P4SMA39CA	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXQ	-	P4SMA43C	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 6.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXR	-	P4SMA43CA	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXS	-	P4SMA47C	TVS	Vbr=42.3..51.7V, Vrwm=38.1V, 6.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXT	-	P4SMA47CA	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXU	-	P4SMA51C	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 5.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXV	-	P4SMA51CA	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXW	-	P4SMA56C	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
NXX	-	P4SMA56CA	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXY	-	P4SMA62C	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 4.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NXZ	-	P4SMA62CA	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NY	-	BZT52C24W	Zener diode	22.80..25.20V, Izt=5mA, Zzt=70Ω, 500mW	SOD-123	5d	1a	Jiy
NY	-	KDZ6.2VVY	Zener diode	6.06..6.33V, Izt=5mA, Zzt=30Ω, 100mW	VSC	7d	1a	Kec
NY	-	P6SMBJ100	TVS	Vrwm=100V, Vbr=90..110V, 4.2A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NY	-	PZU5.1B2A/DG	Zener diode	5.1V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NY	-	SM6T100CA	TVS	Vrwm=85.5V, Vbr=95..105V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde
NY	-	SMBG100	TVS	Vrwm=100V, Vbr=111..128.0V, 3.7A, 600W(1ms)	DO-215AA	5d	1k	Vs
NY	-	SMBJ100	TVS	Vrwm=100V, Vbr=111..128.0V, 3.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
NY	-	TV06B101K-G	TVS	Vrwm=100.0V, Vbr=111.0..136.0V, Ipp=3.35A, 600W(1ms)	DO-214AA	1d	1a	Cmc
NYA	-	P4SMA68C	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 4.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYB	-	P4SMA68CA	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 4.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYC	-	P4SMA75C	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYD	-	P4SMA75CA	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYE	-	P4SMA82C	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 3.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYF	-	P4SMA82CA	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYG	-	P4SMA91C	TVS	Vbr=81.9..100V, Vrwm=73.7V, 3.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYH	-	P4SMA91CA	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYJ	-	P4SMA100C	TVS	Vbr=90.0..110V, Vrwm=81.0V, 2.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYK	-	P4SMA100CA	TVS	Vbr=95.0..105V, Vrwm=85.5V, 3.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYL	-	P4SMA110C	TVS	Vbr=99.0..121V, Vrwm=89.2V, 2.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYM	-	P4SMA110CA	TVS	Vbr=105..116V, Vrwm=94V, 2.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYN	-	P4SMA120C	TVS	Vbr=108..132V, Vrwm=97.2V, 2.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYP	-	P4SMA120CA	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYP	-	P4SMA130CA	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYQ	-	P4SMA130C	TVS	Vbr=117..143V, Vrwm=105V, 2.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYS	-	P4SMA150C	TVS	Vbr=135..165V, Vrwm=121V, 2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYT	-	P4SMA150CA	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYU	-	P4SMA160C	TVS	Vbr=144..176V, Vrwm=130V, 1.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYV	-	P4SMA160CA	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYW	-	P4SMA170C	TVS	Vbr=153..187V, Vrwm=138V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYX	-	P4SMA170CA	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYY	-	P4SMA180C	TVS	Vbr=162..198V, Vrwm=146V, 1.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NYZ	-	P4SMA180CA	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZ	-	1SMB100A	TVS	Vrwm=100V, 3.7A, 600W(1ms)	403A	3d	1s	Ons
NZ	-	3.0SMB120A	Zener diode	111.0..128.0V, Zzt=300Ω, Izt=6.3mA, 3W	DO-214AA	1d	1b	Rul
NZ	-	BZT52B20S	Zener diode	19.60..20.40V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323FL	7d	1a	Tsc
NZ	-	BZT52C27W	Zener diode	25.65..28.35V, Izt=2mA, Zzt=80Ω, 500mW	SOD-123	5d	1a	Jiy
NZ	-	CD214B-T100A	TVS	Vrwm=100V, Irsm=3.7A, 600W(1ms)	DO-214AA	1d	1a	Brn
NZ	-	MM3Z20VB	Zener diode	19.60..20.40V, Zzt=51Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
NZ	-	MM3Z20VBW	Zener diode	19.60..20.40V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323FL	7d	1a	Tac
NZ	-	P6SMBJ100A	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms)	DO-214AA	1d	1a	Pjt
NZ	-	PZU5.1B3A/DG	Zener diode	5.1V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
NZ	-	SMBG100A	TVS	Vrwm=100V, Vbr=111..128V, 3.7A, 600W(1ms)	DO-215AA	5d	1k	Vs
NZ	-	SMBJ100A	TVS	Vrwm=100V, Vbr=111..128V, 3.7A, 600W(1ms)	DO-214AA	1d	1m	Di
NZ	-	SMBJ100A	TVS	Vrwm=100V, Vbr=111..128V, 3.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
NZ	-	SMF100A	TVS	Vrwm=100V, Vbr=111..123V, 1.1A, 200W(1ms)	SOD-123FL	7d	1a	Eic
NZ	-	SMF100CA	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, 1.23A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
NZ	-	SMF11A-M	ESDP-diode	Vbr=12.2V, Vrwm=11V, Ipp=11A, 200W(1ms)	SMF	7d	2y	Vs
NZ	-	TCMM3Z20VB	Zener diode	20V±2%, Izt=5mA, Zzt=51Ω, 200mW	SOD-323FL	7d	1a	Tac
NZ	-	TV02W101B-G	TVS	Vrwm=100V, Vbr=111..123V, Ipp=1.23A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
NZ	-	TV06B101J-G	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=3.70A, 600W(1ms)	DO-214AA	1d	1a	Cmc
NZA	-	P4SMA6.8C	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 38.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZB	-	P4SMA6.8CA	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 40.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZC	-	P4SMA7.5C	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 36.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZD	-	P4SMA7.5CA	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 37.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZE	-	P4SMA8.2C	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 33.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZF	-	P4SMA8.2CA	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 35.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZG	-	P4SMA9.1C	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 30.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZH	-	P4SMA9.1CA	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 31.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZJ	-	P4SMA10C	TVS	Vbr=9.00..11.0V, Vrwm=8.10V, 28.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZK	-	P4SMA10CA	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 29.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZL	-	P4SMA11C	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 26.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZM	-	P4SMA11CA	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 27.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZN	-	P4SMA12C	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 24.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZP	-	P4SMA12CA	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZQ	-	P4SMA13C	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 22.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZR	-	P4SMA13CA	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZS	-	P4SMA15C	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, 19.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
NZT	-	P4SMA15CA	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZU	-	P4SMA16C	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 18.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZV	-	P4SMA16CA	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZW	-	P4SMA18C	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 16.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZX	-	P4SMA18CA	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZY	-	P4SMA20C	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 14.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
NZZ	-	P4SMA20CA	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Pjt
O	-	BAR64-02V	PIN-diode	Sw, RF-att, 150V, 100mA, Vf<1.1V(50mA), < 0.35pF	SOD-523	6d	1a	Inf
O	-	SPE0573D72RG	ESDP-diode	Vrwm=5V, Vbr=6..8.5V, 7A, 250W(1ms), Bidir.	SOD-723	7ba	1j	Syn
O	au	MMSZ5264BPT	Zener diode	60V±5%, Izt=2.1mA, Zzt=170Ω, 225mW	SOD-523	6d	1a	Chm
O	ba	BAT14-03W	Si-diode	Schottky, UHF-mix, 4V, 90mA, Vf<0.66V(10mA, <0.35pF	SOD-323	5d	2	Inf
O.	au	MMSZ5264SPT	Zener diode	60V±5%, Izt=2.1mA, Zzt=170Ω, 225mW	SOD-523	6d	1a	Chm
O0	-	BZD27C9V1P-M	Zener diode	8.5..9.6V, Zzt=2Ω, Izt=50mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
O0	-	MMPZ5245SPT	Zener diode	14.70..15.30V, Izt=5mA, Zzt=32Ω, 225mW	SOD-323	5d	1a	Chm
O1	-	BZD27C10P-M	Zener diode	9.4..10.6V, Zzt=2Ω, Izt=50mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
O10A	-	1KSMB82CA	TVS	Vrwm=70.10V, Vbr=77.90..86.10V, 8.8A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
O10A	-	1KSMBJ24	TVS	Vrwm=24V, Vbr=21.6..26.4V, 28.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10B	-	1KSMB91CA	TVS	Vrwm=77.80V, Vbr=86.50..95.50V, 8.0A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
O10B	-	1KSMBJ24A	TVS	Vrwm=24V, Vbr=22.8..25.2V, 30A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10C	-	1KSMB100CA	TVS	Vrwm=85.50V, Vbr=95.0..105.0V, 7.3A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
O10C	-	1KSMBJ27	TVS	Vrwm=27V, Vbr=24.3..29.7V, 25.5A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10D	-	1KSMB110CA	TVS	Vrwm=94V, Vbr=105.0..116.0V, 6.6A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
O10D	-	1KSMBJ27A	TVS	Vrwm=27V, Vbr=25.7..28.4V, 26.7A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10E	-	1KSMB120CA	TVS	Vrwm=102.0V, Vbr=114.0..126.0V, 6.1A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
O10E	-	1KSMBJ30	TVS	Vrwm=30V, Vbr=27..33V, 22.9A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10F	-	1KSMB130CA	TVS	Vrwm=111.0V, Vbr=124.0..137.0V, 5.6A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
O10F	-	1KSMBJ30A	TVS	Vrwm=30V, Vbr=28.5..31.5V, 24A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10G	-	1KSMB150CA	TVS	Vrwm=128.0V, Vbr=143.0..158.0V, 4.8A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
O10G	-	1KSMBJ33	TVS	Vrwm=33V, Vbr=29.7..36.3V, 21A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10H	-	1KSMB160CA	TVS	Vrwm=136V, Vbr=152.0..168.0V, 4.6A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
O10H	-	1KSMBJ33A	TVS	Vrwm=33V, Vbr=31.4..34.7V, 22A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10I	-	1KSMB170CA	TVS	Vrwm=144.5V, Vbr=162.0..179.0V, 4.3A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
O10I	-	1KSMBJ36	TVS	Vrwm=36V, Vbr=32.4..39.6V, 19.2A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10J	-	1KSMB180CA	TVS	Vrwm=153.0V, Vbr=171.0..189.0V, 4.1A, 1000W(1ms), Bidir.	DO-214AA	1ba	2s	Lif
O10J	-	1KSMBJ36A	TVS	Vrwm=36V, Vbr=34.2..37.8V, 20A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10K	-	1KSMBJ39	TVS	Vrwm=39V, Vbr=35.1..42.9V, 17.5A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10L	-	1KSMBJ39A	TVS	Vrwm=39V, Vbr=37.1..41V, 18.7A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10M	-	1KSMBJ43	TVS	Vrwm=43V, Vbr=38.7..47.3V, 16A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10N	-	1KSMBJ43A	TVS	Vrwm=43V, Vbr=40.9..45.2V, 16.8A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10O	-	1KSMBJ47	TVS	Vrwm=47V, Vbr=42.3..51.7V, 14.8A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10P	-	1KSMBJ47A	TVS	Vrwm=47V, Vbr=44.7..49.4V, 15.5A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10Q	-	1KSMBJ51	TVS	Vrwm=51V, Vbr=45.9..56.1V, 13.7A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10R	-	1KSMBJ51A	TVS	Vrwm=51V, Vbr=48.5..53.6V, 14.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10S	-	1KSMBJ56	TVS	Vrwm=56V, Vbr=50.4..61.6V, 12.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10T	-	1KSMBJ56A	TVS	Vrwm=56V, Vbr=53.2..58.8V, 13A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10U	-	1KSMBJ62	TVS	Vrwm=62V, Vbr=55.8..68.2V, 11.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10V	-	1KSMBJ62A	TVS	Vrwm=62V, Vbr=58.9..65.1V, 11.8A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10W	-	1KSMBJ68	TVS	Vrwm=68V, Vbr=61.2..74.8V, 10.2A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10X	-	1KSMBJ68A	TVS	Vrwm=68V, Vbr=64.6..71.4V, 10.8A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10Y	-	1KSMBJ75	TVS	Vrwm=75V, Vbr=67.5..82.5V, 9.2A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O10Z	-	1KSMBJ75A	TVS	Vrwm=75V, Vbr=71.3..78.8V, 9.7A, 1000W(1ms)	DO-214AA	1d	1p	Lif
O2	-	BZD27C11P-M	Zener diode	10.4..11.6V, Zzt=4Ω, Izt=50mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
O3	-	BZD27C12P-M	Zener diode	11.4..12.7V, Zzt=4Ω, Izt=50mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
O4	-	BZD27C13P-M	Zener diode	12.4..14.1V, Zzt=5Ω, Izt=50mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
O5	-	BZD27C15P-M	Zener diode	13.8..15.6V, Zzt=5Ω, Izt=50mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
O6	-	BZD27C16P-M	Zener diode	15.3..17.1V, Zzt=6Ω, Izt=25mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
O7	-	BZD27C18P-M	Zener diode	16.8..19.1V, Zzt=6Ω, Izt=25mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
O8	-	BZD27C20P-M	Zener diode	18.8..21.2V, Zzt=6Ω, Izt=25mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
O8	-	BZT52C10WT	Zener diode	9.50..10.50V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523	6d	1a	Ttr
O8	-	MM5Z10H	Zener diode	9.4..10.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523	6d	1a	Zow
O8	-	MM5Z10V	Zener diode	10V±5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-523	6d	1a	Eic
O9	-	BZD27C22P-M	Zener diode	20.8..23.3V, Zzt=6Ω, Izt=25mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
OE	-	SMF12A-M	ESDP-diode	Vbr=13.3V, Vrwm=12V, Ipp=10.1A, 200W(1ms)	SMF	7d	2y	Vs
OET	-	5.0SMCJ18A	TVS	Vrwm=18.0V, Vbr=20.0..22.1V, 172.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
OEV	-	5.0SMCJ20A	TVS	Vrwm=20.0V, Vbr=22.2..24.5V, 155.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
OEX	-	5.0SMCJ22A	TVS	Vrwm=22.0V, Vbr=24.4..26.9V, 141.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
OEZ	-	5.0SMCJ24A	TVS	Vrwm=24.0V, Vbr=26.7..29.5V, 129.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
OF	-	LM3Z6V8T1G	Zener diode	6.4..7.2V, Izt=5mA, 200mW	SOD-323	5d	1u	Lrc
OFE	-	5.0SMCJ26A	TVS	Vrwm=26.0V, Vbr=28.9..31.9V, 119.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
OFG	-	5.0SMCJ28A	TVS	Vrwm=28.0V, Vbr=31.1..34.4V, 110.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
OFK	-	5.0SMCJ30A	TVS	Vrwm=30.0V, Vbr=33.3..36.8V, 103.0A, 5000W(1ms)	DO-214AB	1d	1a	Ext
OFM	-	5.0SMCJ33A	TVS	Vrwm=33.0V, Vbr=36.7..40.6V, 93.9A, 5000W(1ms)	DO-214AB	1d	1a	Ext
OFP	-	5.0SMCJ36A	TVS	Vrwm=36.0V, Vbr=40.0..44.2V, 86.1A, 5000W(1ms)	DO-214AB	1d	1a	Ext
OG	-	SMF13A-M	ESDP-diode	Vbr=14.4V, Vrwm=13V, Ipp=9.3A, 200W(1ms)	SMF	7d	2y	Vs
OK	-	SM6T150C	TVS	Vrwm=128V, Vbr=143..158V, 2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1r	Ste
OK	-	SMF14A-M	ESDP-diode	Vbr=15.6V, Vrwm=14V, Ipp=8.6A, 200W(1ms)	SMF	7d	2y	Vs
OL	-	SM6T150CA	TVS	Vrwm=128V, Vbr=143..158V, 2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde
OM	-	SMF15A-M	ESDP-diode	Vbr=16.7V, Vrwm=15V, Ipp=8.2A, 200W(1ms)	SMF	7d	2y	Vs
OO	-	BB857	C-diode	SATV-tuning, 35V, 6..0.65pF(1..28V)	SCD-80	6d	1u	Sie
OP	-	CMDZ6L2	Zener diode	5.890..6.510V, Izt=0.5mA, Zzt=90Ω, 250mW	SOD-323	5d	1a	Cen
OP	-	SMF16A-M	ESDP-diode	Vbr=17.8V, Vrwm=16V, Ipp=7.7A, 200W(1ms)	SMF	7d	2y	Vs
OR	-	SMF17A-M	ESDP-diode	Vbr=18.9V, Vrwm=17V, Ipp=7.2A, 200W(1ms)	SMF	7d	2y	Vs
OT	-	SM6T200C	TVS	Vrwm=171V, Vbr=190..210V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1d	1q	Ste
OT	-	SMF18A-M	ESDP-diode	Vbr=20.0V, Vrwm=18V, Ipp=5.8A, 200W(1ms)	SMF	7d	2y	Vs
OU	-	SM6T200CA	TVS	Vrwm=171V, Vbr=190..210V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde
OV	-	SMF20A-M	ESDP-diode	Vbr=22.2V, Vrwm=20V, Ipp=6.2A, 200W(1ms)	SMF	7d	2y	Vs
OW	-	SM6T220CA	TVS	Vrwm=188V, Vbr=209..231V, 2.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1j	Mde
OX	-	SMF22A-M	ESDP-diode	Vbr=24.4V, Vrwm=22V, Ipp=5.6A, 200W(1ms)	SMF	7d	2y	Vs
OZ	-	SMF24A-M	ESDP-diode	Vbr=26.7V, Vrwm=24V, Ipp=5.1A, 200W(1ms)	SMF	7d	2y	Vs
P	-	HVU314	C-diode	BS Tuning, 32V, 6.4..0.47pF(1..25V)	SOD-123	5d	1a	Ren
P	-	MA2S367	C-diode	CATV, 34V, 10.5/3.3pF(2/10V), 1.6Ω(470MHz)	SOD-523	6d	1a	Pan
P	-	MAZS056	Zener diode	5.3..6V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
P	-	MM9D13V	Zener diode	12.35..13.65V, Izt=5mA, Zzt=37Ω, 200mW	SOD-923	7d	1n	Wtr
P	-	NZ9F13VT	Zener diode	12.35..13.65V, Izt=5mA, Zzt=37Ω, 200mW	SOD-923	7d	1n	Ons
P	-	NZ9F7V5ST	Zener diode	7.28..7.6V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	2m	Ons
P	au	CH411S-40PT	Si-diode	SBD, 40V, 500mA, Vf<0.5V(500mA)	SOD-523	8d	1a	Chm
P	au	MMSZ5265BPT	Zener diode	62V±5%, Izt=2mA, Zzt=185Ω, 225mW	SOD-523	6d	1a	Chm
P	ba	BA586	PIN-diode	Attenuator, >1MHz, 50V, 50mA, Vf<1 ,15V, Cd<0.2pF	SOD-123	5d	2	Sie
P	ba	BAT15-03W	Si-diode	Schottky, DBS-mix, 4V, 100mA, <12GHz, <0.35pF	SOD-323	5d	2	Inf
P-	-	MAZS0560M	Zener diode	5.48..5.76V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
P.	au	MMSZ5265SPT	Zener diode	62V±5%, Izt=2mA, Zzt=185Ω, 225mW	SOD-523	6d	1a	Chm
P.6	-	MMSZ5266C-V-G	Zener diode	68V±2%, Izt=1.8mA, Zzt=230Ω, 500mW	SOD-123	5d	1kb	Vs
P.7	-	MMSZ5267C-V-G	Zener diode	75V±2%, Izt=1.7mA, Zzt=270Ω, 500mW	SOD-123	5d	1kb	Vs
P^	-	MAZS0560H	Zener diode	5.66..5.95V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
P_	-	MAZS0560L	Zener diode	5.3..5.58V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
P0	-	BB150	C-diode	TV-VHF/CATV-tuning, 30V, ..460MHz, 38..2.2pF(0.5..28V)	SOD-123	5d	1a	Phi
P0	-	BZD27C24P-M	Zener diode	22.8..25.6V, Zzt=7Ω, Izt=25mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
P0	-	MMPZ5246SPT	Zener diode	15.68..16.32V, Izt=5mA, Zzt=36Ω, 225mW	SOD-323	5d	1a	Chm
P010	-	STBP010	TVS	Vbr=9.00..11.0V, Vrwm=8.10V, 28.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P010	-	STUP010	TVS	Vbr=9.00..11.0V, Vrwm=8.10V, 28.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P011	-	STBP011	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 26.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P011	-	STUP011	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 26.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P012	-	STBP012	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 24.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P012	-	STUP012	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 24.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P013	-	STBP013	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 22.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P013	-	STUP013	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 22.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P015	-	STBP015	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, 19.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P015	-	STUP015	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, 19.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P016	-	STBP016	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 18.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P016	-	STUP016	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 18.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P018	-	STBP018	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 16.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P018	-	STUP018	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 16.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P020	-	STBP020	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 14.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P020	-	STUP020	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 14.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P022	-	STBP022	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 13.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P022	-	STUP022	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 13.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P024	-	STBP024	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 12.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P024	-	STUP024	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 12.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P027	-	STBP027	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 11.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P027	-	STUP027	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 11.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P030	-	STBP030	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 10.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P030	-	STUP030	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 10.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P033	-	STBP033	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 9.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P033	-	STUP033	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 9.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P036	-	STBP036	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 8.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P036	-	STUP036	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 8.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P039	-	STBP039	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 7.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P039	-	STUP039	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 7.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
P043	-	STBP043	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 6.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P043	-	STUP043	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 6.8A, 400W(1ms)	DO-214AC	1d	1a	Eic



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
P047	-	STBP047	TVS	Vbr=42.3..51.7V, Vrwm=38.1V, 6.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P047	-	STUP047	TVS	Vbr=42.3..51.7V, Vrwm=38.1V, 6.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
P051	-	STBP051	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 5.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P051	-	STUP051	TVS	Vbr=45.9..56.1V, Vrwm=41.3V, 5.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
P056	-	STBP056	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P056	-	STUP056	TVS	Vbr=50.4..61.6V, Vrwm=45.4V, 5.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
P062	-	STBP062	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 4.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P062	-	STUP062	TVS	Vbr=55.8..68.2V, Vrwm=50.2V, 4.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
P068	-	STBP068	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 4.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P068	-	STUP068	TVS	Vbr=61.2..74.8V, Vrwm=55.1V, 4.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
P06A	-	P0640SA	Thy-SPD	Vdrm=58V, Vs=77V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P06C	-	P0640SC	Thy-SPD	Vdrm=58V, Vs=77V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P06I	-	STBP06I	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 38.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P06I	-	STUP06I	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 38.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P075	-	STBP075	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P075	-	STUP075	TVS	Vbr=67.5..82.5V, Vrwm=60.7V, 3.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
P07A	-	P0720SA	Thy-SPD	Vdrm=65V, Vs=88V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P07C	-	P0720SC	Thy-SPD	Vdrm=65V, Vs=88V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P07F	-	STBP07F	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 36.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P07F	-	STUP07F	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 36.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P082	-	STBP082	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 3.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P082	-	STUP082	TVS	Vbr=73.8..90.2V, Vrwm=66.4V, 3.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
P08C	-	STBP08C	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 33.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P08C	-	STUP08C	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 33.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P091	-	STBP091	TVS	Vbr=81.9..100V, Vrwm=73.7V, 3.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P091	-	STUP091	TVS	Vbr=81.9..100V, Vrwm=73.7V, 3.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
P09A	-	P0900SA	Thy-SPD	Vdrm=75V, Vs=98V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P09B	-	STBP09B	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 30.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P09B	-	STUP09B	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 30.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P09C	-	P0900SC	Thy-SPD	Vdrm=75V, Vs=98V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P0B0	-	STBP0B0	TVS	Vbr=90.0..110V, Vrwm=81.0V, 2.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P0B0	-	STUP0B0	TVS	Vbr=90.0..110V, Vrwm=81.0V, 2.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
P0B1	-	STBP0B1	TVS	Vbr=99.0..121V, Vrwm=89.2V, 2.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P0B1	-	STUP0B1	TVS	Vbr=99.0..121V, Vrwm=89.2V, 2.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
P0B2	-	STBP0B2	TVS	Vbr=108..132V, Vrwm=97.2V, 2.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P0B2	-	STUP0B2	TVS	Vbr=108..132V, Vrwm=97.2V, 2.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
P0B3	-	STBP0B3	TVS	Vbr=117..143V, Vrwm=105V, 2.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P0B3	-	STUP0B3	TVS	Vbr=117..143V, Vrwm=105V, 2.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
P0B5	-	STBP0B5	TVS	Vbr=135..165V, Vrwm=121V, 2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P0B5	-	STUP0B5	TVS	Vbr=135..165V, Vrwm=121V, 2.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P0B6	-	STBP0B6	TVS	Vbr=144..176V, Vrwm=130V, 1.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P0B6	-	STUP0B6	TVS	Vbr=144..176V, Vrwm=130V, 1.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
P0B7	-	STBP0B7	TVS	Vbr=153..187V, Vrwm=138V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P0B7	-	STUP0B7	TVS	Vbr=153..187V, Vrwm=138V, 1.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
P0B8	-	STBP0B8	TVS	Vbr=162..198V, Vrwm=146V, 1.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P0B8	-	STUP0B8	TVS	Vbr=162..198V, Vrwm=146V, 1.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
P0D0	-	STBP0D0	TVS	Vbr=180..220V, Vrwm=162V, 1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P0D0	-	STUP0D0	TVS	Vbr=180..220V, Vrwm=162V, 1.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
P0D2	-	STBP0D2	TVS	Vbr=198..242V, Vrwm=175V, 1.16A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P0D2	-	STUP0D2	TVS	Vbr=198..242V, Vrwm=175V, 1.16A, 400W(1ms)	DO-214AC	1d	1a	Eic
P0D5	-	STBP0D5	TVS	Vbr=225..275V, Vrwm=202V, 1.11A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P0D5	-	STUP0D5	TVS	Vbr=225..275V, Vrwm=202V, 1.11A, 400W(1ms)	DO-214AC	1d	1a	Eic
P0E0	-	STBP0E0	TVS	Vbr=270..330V, Vrwm=243V, 0.93A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P0E0	-	STUP0E0	TVS	Vbr=270..330V, Vrwm=243V, 0.93A, 400W(1ms)	DO-214AC	1d	1a	Eic
P0E5	-	STBP0E5	TVS	Vbr=315..385V, Vrwm=284V, 0.79A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P0E5	-	STUP0E5	TVS	Vbr=315..385V, Vrwm=284V, 0.79A, 400W(1ms)	DO-214AC	1d	1a	Eic
P0G0	-	STBP0G0	TVS	Vbr=360..440V, Vrwm=324V, 0.70A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P0G0	-	STUP0G0	TVS	Vbr=360..440V, Vrwm=324V, 0.70A, 400W(1ms)	DO-214AC	1d	1a	Eic
P0G4	-	STBP0G4	TVS	Vbr=396..484V, Vrwm=356V, 0.95A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P0G4	-	STUP0G4	TVS	Vbr=396..484V, Vrwm=356V, 0.95A, 400W(1ms)	DO-214AC	1d	1a	Eic
P1	-	BB131	C-diode	TV-UHF-tuning, 30V, 20mA, 21.45..62.02pF(4.5/1V)	SOD-323	5d	1a	Phi
P1	-	BZD27C27P-M	Zener diode	25.1..28.9V, Zzt=7Ω, Izt=25mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
P1	-	CMOZ16L	Zener diode	15.20..16.80V, Izt=0.25mA, Zzt=100Ω, 250mW	SOD-523	6d	1a	Cen
P1	-	CZRH5266B-G	Zener diode	64.6..71.4V, Zzt=230Ω, Izt=1.8mA, 150mW	SOD-523	6d	1a	Cmc
P1	-	CZRV5266B-G	Zener diode	64.6..71.4V, Zzt=230Ω, Izt=1.8mA, 200mW	SOD-323	5d	1a	Cmc
P1	-	HVC131	PIN-diode	HF-Sw, 65V, 100mA, 150mW, 0.8pF, <2Ω(10mA/100MHz)	UFP	6d	1b	Hit
P1	-	HVU131	PIN-diode	Antenna-Sw, 65V, 100mA, <1Ω(10mA)	SOD-123	5d	1a	Ren
P1	-	LMSZ5266BT1G	Zener diode	64.6..71.4V, Izt=1.8mA, 500mW	SOD-123	5d	1d	Lrc
P1	-	MM3Z5235B	Zener diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 200mW	SOD-323FL	7d	1a	Bts
P1	-	MM3Z5235BH	Zener diode	6.46..7.14V, Izt=20mA, Zzt=5Ω, 300mW	SOD-323	5d	1a	Zow

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
P1	-	MM3Z5266B	Zener diode	64.60..71.40V, Izt=1.8mA, Zzt=230Ω, 200mW	SOD-323	5d	1a	Ext
P1	-	MMBZ5266BV	Zener diode	68V±5%, Izt=1.8mA, Zzt=230Ω, 200mW	SOD-523	6d	1a	Pjt
P1	-	MMSZ5266B-F	Zener diode	64.60..71.40V, Izt=1.8mA, 500mW	SOD-123F	7d	1a	Ttr
P1	-	OYD68VT1	Zener diode	64...72V, Izt=2.5mA, Zzt=250Ω, 500mW	SOD-123	5d	1a	Ouy
P10A	-	1KSMBJ82	TVS	Vrwm=82V, Vbr=73.8..90.2V, 8.5A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P10B	-	1KSMBJ82A	TVS	Vrwm=82V, Vbr=77.9..86.1V, 8.8A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P10C	-	1KSMBJ91	TVS	Vrwm=91V, Vbr=81.9..100V, 7.5A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P10D	-	1KSMBJ91A	TVS	Vrwm=91V, Vbr=86.5..95.5V, 8A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P10E	-	1KSMBJ100	TVS	Vrwm=100V, Vbr=90..110V, 7A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P10F	-	1KSMBJ100A	TVS	Vrwm=100V, Vbr=95..105V, 7.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P10G	-	1KSMBJ110	TVS	Vrwm=110V, Vbr=99..121V, 6.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P10H	-	1KSMBJ110A	TVS	Vrwm=110V, Vbr=105..116V, 6.6A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P10I	-	1KSMBJ120	TVS	Vrwm=120V, Vbr=108..132V, 5.8A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P10J	-	1KSMBJ120A	TVS	Vrwm=120V, Vbr=114..126V, 6.1A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P10K	-	1KSMBJ130	TVS	Vrwm=130V, Vbr=117..143V, 5.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P10L	-	1KSMBJ130A	TVS	Vrwm=130V, Vbr=124..137V, 5.6A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P10M	-	1KSMBJ150	TVS	Vrwm=150V, Vbr=135..165V, 4.7A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P10N	-	1KSMBJ150A	TVS	Vrwm=150V, Vbr=143..158V, 4.8A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P10O	-	1KSMBJ160	TVS	Vrwm=160V, Vbr=144..176V, 4.3A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P10P	-	1KSMBJ160A	TVS	Vrwm=160V, Vbr=152..168V, 4.6A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P11A	-	P1100SA	Thy-SPD	Vdrm=90V, Vs=130V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P11C	-	P1100SC	Thy-SPD	Vdrm=90V, Vs=130V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P12A	-	10TPSMB12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 59.9A, 600W(1ms)	DO-214AA	1d	1p	Lif
P12A	-	30TPSMC12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 180.0A, 1500W(1ms)	DO-214AB	1d	1p	Lif
P12C	-	10TPSMB12CA	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 59.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
P12C	-	30TPSMC12CA	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 180.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
P13A	-	10TPSMB13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 54.9A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P13A	-	30TPSMC13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 164.8A, 3000W(1ms)	DO-214AB	1d	1p	Lif
P13A	-	P1300SA	Thy-SPD	Vdrm=120V, Vs=160V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P13C	-	10TPSMB13CA	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 54.9A, 1000W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
P13C	-	30TPSMC13CA	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 164.8A, 3000W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
P13C	-	P1300SC	Thy-SPD	Vdrm=120V, Vs=160V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P15A	-	10TPSMB15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 47.2A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P15A	-	30TPSMC15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 141.5A, 3000W(1ms)	DO-214AB	1d	1p	Lif
P15A	-	P1500SA	Thy-SPD	Vdrm=140V, Vs=180V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P15C	-	10TPSMB15CA	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 47.2A, 1000W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
P15C	-	30TPSMC15CA	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 141.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
P15C	-	P1500SC	Thy-SPD	Vdrm=140V, Vs=180V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P16A	-	10TPSMB16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 44.4A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P16A	-	30TPSMC16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 133.3A, 3000W(1ms)	DO-214AB	1d	1p	Lif
P16C	-	10TPSMB16CA	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 44.4A, 1000W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
P16C	-	30TPSMC16CA	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 133.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
P18A	-	10TPSMB18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 39.2A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P18A	-	30TPSMC18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 119.1A, 3000W(1ms)	DO-214AB	1d	1p	Lif
P18A	-	P1800SA	Thy-SPD	Vdrm=160V, Vs=220V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P18C	-	10TPSMB18CA	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 39.2A, 1000W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
P18C	-	30TPSMC18CA	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 119.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
P18C	-	P1800SC	Thy-SPD	Vdrm=160V, Vs=220V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P2	-	BB132	C-diode	TV-UHF-tuning, 30V, 20mA, 2.75..30pF(28/0.5V), <2Ω	SOD-323	5d	1a	Phi
P2	-	BZD27C30P-M	Zener diode	28..32V, Zzt=15Ω, Izt=25mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
P2	-	CMOZ18L	Zener diode	17.10..18.90V, Izt=0.25mA, Zzt=100Ω, 250mW	SOD-523	6d	1a	Cen
P2	-	CZRH5267B-G	Zener diode	71.25..78.75V, Zzt=270Ω, Izt=1.7mA, 150mW	SOD-523	6d	1a	Cmc
P2	-	CZRV5267B-G	Zener diode	71.25..78.75V, Zzt=270Ω, Izt=1.7mA, 200mW	SOD-323	5d	1a	Cmc
P2	-	HVC132	PIN-diode	HF-Sw, 65V, 100mA, 150mW, 0.5pF, <2Ω(10mA/100MHz)	UFP	6d	1b	Hit
P2	-	HVU132	PIN-diode	Antenna-Sw, 65V, 100mA, <2Ω(10mA)	SOD-123	5d	1a	Ren
P2	-	LMSZ5267BT1G	Zener diode	71.25..78.75V, Izt=1.7mA, 500mW	SOD-123	5d	1d	Lrc
P2	-	MM3Z5257B	Zener diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 200mW	SOD-323FL	7d	1a	Bts
P2	-	MM3Z5257BH	Zener diode	31.35..34.65V, Izt=3.8mA, Zzt=58Ω, 300mW	SOD-323	5d	1a	Zow
P2	-	MM3Z5267B	Zener diode	71.25..78.75V, Izt=1.7mA, Zzt=270Ω, 200mW	SOD-323	5d	1a	Ext
P2	-	MMBZ5267BV	Zener diode	75V±5%, Izt=1.7mA, Zzt=270Ω, 200mW	SOD-523	6d	1a	Pjt
P2	-	MMSZ5267B-F	Zener diode	71.25..78.75V, Izt=1.7mA, 500mW	SOD-123F	7d	1a	Ttr
P2	-	OYD75VT1	Zener diode	70...79V, Izt=2.5mA, Zzt=300Ω, 500mW	SOD-123	5d	1a	Ouy
P20A	-	10TPSMB20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 36.1A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P20A	-	30TPSMC20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 108.3A, 3000W(1ms)	DO-214AB	1d	1p	Lif
P20C	-	10TPSMB20CA	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 36.1A, 1000W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
P20C	-	30TPSMC20CA	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 108.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
P22A	-	10TPSMB22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 32.7A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P22A	-	30TPSMC22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 98.1A, 3000W(1ms)	DO-214AB	1d	1p	Lif
P22C	-	10TPSMB22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 32.7A, 1000W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
P22C	-	30TPSMC22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 98.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1p	Lif

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
P23A	-	P2300SA	Thy-SPD	Vdrm=190V, Vs=260V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P23C	-	P2300SC	Thy-SPD	Vdrm=190V, Vs=260V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P24A	-	10TPSMB24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 30.1A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P24A	-	30TPSMC24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 90.4A, 3000W(1ms)	DO-214AB	1d	1p	Lif
P24C	-	10TPSMB24CA	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 30.1A, 1000W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
P24C	-	30TPSMC24CA	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 90.4A, 3000W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
P26A	-	P2600SA	Thy-SPD	Vdrm=220V, Vs=300V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P26C	-	P2600SC	Thy-SPD	Vdrm=220V, Vs=300V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P27A	-	10TPSMB27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 26.7A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P27A	-	30TPSMC27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 80.0A, 3000W(1ms)	DO-214AB	1d	1p	Lif
P27C	-	10TPSMB27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 26.7A, 1000W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
P27C	-	30TPSMC27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 80.0A, 3000W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
P2B	-	ESH2PB	Si-diode	Rectifier, 100V, 2A, Vf<0.92V(2A)	DO-220AA	8d	1k	Vs
P2C	-	ESH2PC	Si-diode	Rectifier, 150V, 2A, Vf<0.92V(1A)	DO-220AA	8d	1k	Vs
P2D	-	ESH2PD	Si-diode	Rectifier, 200V, 2A, Vf<0.92V(1A)	DO-220AA	8d	1k	Vs
P3	-	BB133	C-diode	TV-UHF-tuning, 30V, 20mA, 2.6..46pF(28/0.5V), <0.9Ω	SOD-323	5d	1a	Phi
P3	-	BZD27C33P-M	Zener diode	31..35V, Zzt=15Ω, Izt=25mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
P3	-	CMOZ20L	Zener diode	19.0..21.0V, Izt=0.25mA, Zzt=150Ω, 250mW	SOD-523	6d	1a	Cen
P3	-	D3FP3	Si-diode	SBR, 30V, 2.6A, Vf<0.45V(2.6A)	SOD-15	1d	1a	Shi
P3	-	HVC133	PIN-diode	HF-Sw, 30V, 100mA, 150mW, 0.9pF, <0.7Ω(10mA/100MHz)	UFP	6d	1b	Hit
P3	-	HVU133	PIN-diode	Antenna-Sw, 15V, <0.7Ω(20mA)	SOD-123	5d	1a	Ren
P3	-	LMSZ5268BT1G	Zener diode	77.9..86.1V, Izt=1.5mA, 500mW	SOD-123	5d	1d	Lrc
P3	-	RKZ22B2KK	Zener diode	21.54..22.47V, Izt=5mA, Zzt=55Ω, 150mW	SFP	7d	1a	Ren
P3	-	RKZ22B2KL	Zener diode	21.54..22.47V, Izt=2mA, Zzt=55Ω, 100mW	EFP	7d	1a	Ren
P30A	-	10TPSMB30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 24.2A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P30A	-	30TPSMC30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 72.5A, 3000W(1ms)	DO-214AB	1d	1p	Lif
P30C	-	10TPSMB30CA	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 24.2A, 1000W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
P30C	-	30TPSMC30CA	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 72.5A, 3000W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
P31A	-	P3100SA	Thy-SPD	Vdrm=275V, Vs=350V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P31C	-	P3100SC	Thy-SPD	Vdrm=275V, Vs=350V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P33A	-	10TPSMB33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 21.9A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P33A	-	30TPSMC33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 65.7A, 3000W(1ms)	DO-214AB	1d	1p	Lif
P33C	-	10TPSMB33CA	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 21.9A, 1000W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
P33C	-	30TPSMC33CA	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 65.7A, 3000W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
P35A	-	P3500SA	Thy-SPD	Vdrm=300V, Vs=400V, Ipp=50A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P35C	-	P3500SC	Thy-SPD	Vdrm=300V, Vs=400V, Ipp=100A(1ms), Bidir.	DO-214AA	1ba	1j	Vs
P36A	-	10TPSMB36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 20.0A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P36A	-	30TPSMC36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 60.1A, 3000W(1ms)	DO-214AB	1d	1p	Lif
P36C	-	10TPSMB36CA	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 20.0A, 1000W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
P36C	-	30TPSMC36CA	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 60.1A, 3000W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
P39A	-	10TPSMB39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 18.6A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P39A	-	30TPSMC39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 55.7A, 3000W(1ms)	DO-214AB	1d	1p	Lif
P39C	-	10TPSMB39CA	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 18.6A, 1000W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
P39C	-	30TPSMC39CA	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 55.7A, 3000W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
P4	-	BB134	C-diode	TV-UHF-tuning, 30V, 20mA, 2.1..21pF(28/0.5V), <0.75Ω	SOD-323	5d	1a	Phi
P4	-	BZD27C36P-M	Zener diode	34..38V, Zzt=21Ω, Izt=10mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
P4	-	CMOZ22L	Zener diode	20.90..23.10V, Izt=0.25mA, Zzt=150Ω, 250mW	SOD-523	6d	1a	Cen
P4	-	HVC134	PIN-diode	HF-Sw, 65V, 100mA, 150mW, 0.4pF, <2Ω(10mA/100MHz)	UFP	6d	1b	Hit
P4	-	LMSZ5269BT1G	Zener diode	82.65..91.35V, Izt=1.4mA, 500mW	SOD-123	5d	1d	Lrc
P4	-	MM1Z5235B	Zener diode	6.46..7.14V, Izt=20mA, Zzt=5Ω, 500mW	SOD-323FL	7d	1a	Eic
P4	-	MM1Z5235BH	Zener diode	6.46..7.14V, Izt=20mA, Zzt=5Ω, 500mW	SOD-123	5d	1a	Zow
P4	-	MMSZ5235B	Zener diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 500mW	SOD-123	5d	1a	Eic
P43A	-	10TPSMB43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 16.9A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P43A	-	30TPSMC43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 50.6A, 3000W(1ms)	DO-214AB	1d	1p	Lif
P43C	-	10TPSMB43CA	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 16.9A, 1000W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
P43C	-	30TPSMC43CA	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 50.6A, 3000W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
P47A	-	10TPSMB47A	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 15.4A, 1000W(1ms)	DO-214AA	1d	1p	Lif
P47A	-	30TPSMC47A	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 46.3A, 3000W(1ms)	DO-214AB	1d	1p	Lif
P47C	-	10TPSMB47CA	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 15.4A, 1000W(1ms), Bidir.	DO-214AA	1ba	1p	Lif
P47C	-	30TPSMC47CA	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 46.3A, 3000W(1ms), Bidir.	DO-214AB	1ba	1p	Lif
P5	-	BB135	C-diode	TV-UHF-tuning, 30V, 20mA, 2.1..21pF(28/0.5V), <0.75Ω	SOD-323	5d	1a	Phi
P5	-	BZD27C39P-M	Zener diode	37..41V, Zzt=21Ω, Izt=10mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
P5	-	BZX584B22V	Zener diode	21.56..22.44V, Izt=5mA, Zzt=55Ω, 200mW	SOD-523FL	7d	1a	Tac
P5	-	CMOZ24L	Zener diode	22.80..25.20V, Izt=0.25mA, Zzt=150Ω, 250mW	SOD-523	6d	1a	Cen
P5	-	HVC135	PIN-diode	Ant-Sw, 65V, 100mA, 150mW, 0.6pF, <2Ω(2mA/100MHz)	UFP	6d	1b	Hit
P5	-	LMSZ5270BT1G	Zener diode	86.45..95.55V, Izt=1.4mA, 500mW	SOD-123	5d	1d	Lrc
P5	-	MM1Z5257B	Zener diode	31.35..34.65V, Izt=3.8mA, Zzt=58Ω, 500mW	SOD-323FL	7d	1a	Eic
P5	-	MM1Z5257BH	Zener diode	31.35..34.65V, Izt=3.8mA, Zzt=58Ω, 500mW	SOD-123	5d	1a	Zow
P5	-	MM5Z22VB	Zener diode	21.56..22.44V, Izt=5mA, Zzt=55Ω, 200mW	SOD-523FL	7d	1a	Tac
P5	-	MMSZ5257B	Zener diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 500mW	SOD-123	5d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
P510	-	STBP510	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 29.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P510	-	STUP510	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 29.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P511	-	STBP511	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 27.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P511	-	STUP511	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 27.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P512	-	STBP512	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P512	-	STUP512	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P513	-	STBP513	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P513	-	STUP513	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P515	-	STBP515	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P515	-	STUP515	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P516	-	STBP516	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P516	-	STUP516	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P518	-	STBP518	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P518	-	STUP518	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P520	-	STBP520	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P520	-	STUP520	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P522	-	STBP522	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P522	-	STUP522	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P524	-	STBP524	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P524	-	STUP524	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P527	-	STBP527	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P527	-	STUP527	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
P530	-	STBP530	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P530	-	STUP530	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P533	-	STBP533	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P533	-	STUP533	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P536	-	STBP536	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P536	-	STUP536	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
P539	-	STBP539	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P539	-	STUP539	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
P543	-	STBP543	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P543	-	STUP543	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 400W(1ms)	DO-214AC	1d	1a	Eic
P547	-	STBP547	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P547	-	STUP547	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
P551	-	STBP551	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P551	-	STUP551	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P556	-	STBP556	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P556	-	STUP556	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
P562	-	STBP562	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P562	-	STUP562	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P568	-	STBP568	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 4.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P568	-	STUP568	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 4.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
P56I	-	STBP56I	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 40.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P56I	-	STUP56I	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 40.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P575	-	STBP575	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P575	-	STUP575	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 400W(1ms)	DO-214AC	1d	1a	Eic
P57F	-	STBP57F	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 37.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P57F	-	STUP57F	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 37.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P582	-	STBP582	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P582	-	STUP582	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
P58C	-	STBP58C	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 35.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P58C	-	STUP58C	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 35.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P591	-	STBP591	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P591	-	STUP591	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
P59B	-	STBP59B	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 31.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P59B	-	STUP59B	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 31.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P5B0	-	STBP5B0	TVS	Vbr=95.0..105V, Vrwm=85.5V, 3.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P5B0	-	STUP5B0	TVS	Vbr=95.0..105V, Vrwm=85.5V, 3.1A, 400W(1ms)	DO-214AC	1d	1a	Eic
P5B1	-	STBP5B1	TVS	Vbr=105..116V, Vrwm=94V, 2.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P5B1	-	STUP5B1	TVS	Vbr=105..116V, Vrwm=94V, 2.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
P5B2	-	STBP5B2	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P5B2	-	STUP5B2	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
P5B3	-	STBP5B3	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P5B3	-	STUP5B3	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
P5B5	-	STBP5B5	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P5B5	-	STUP5B5	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P5B6	-	STBP5B6	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P5B6	-	STUP5B6	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
P5B7	-	STBP5B7	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P5B7	-	STUP5B7	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 400W(1ms)	DO-214AC	1d	1a	Eic



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
P5B8	-	STBP5B8	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P5B8	-	STUP5B8	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
P5D0	-	STBP5D0	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P5D0	-	STUP5D0	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 400W(1ms)	DO-214AC	1d	1a	Eic
P5D2	-	STBP5D2	TVS	Vbr=209..231V, Vrwm=185V, 1.22A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P5D2	-	STUP5D2	TVS	Vbr=209..231V, Vrwm=185V, 1.22A, 400W(1ms)	DO-214AC	1d	1a	Eic
P5D5	-	STBP5D5	TVS	Vbr=237..263V, Vrwm=214V, 1.16A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P5D5	-	STUP5D5	TVS	Vbr=237..263V, Vrwm=214V, 1.16A, 400W(1ms)	DO-214AC	1d	1a	Eic
P5E0	-	STBP5E0	TVS	Vbr=285..315V, Vrwm=256V, 0.97A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P5E0	-	STUP5E0	TVS	Vbr=285..315V, Vrwm=256V, 0.97A, 400W(1ms)	DO-214AC	1d	1a	Eic
P5E5	-	STBP5E5	TVS	Vbr=332..368V, Vrwm=300V, 0.83A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P5E5	-	STUP5E5	TVS	Vbr=332..368V, Vrwm=300V, 0.83A, 400W(1ms)	DO-214AC	1d	1a	Eic
P5G0	-	STBP5G0	TVS	Vbr=380..420V, Vrwm=342V, 0.73A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P5G0	-	STUP5G0	TVS	Vbr=380..420V, Vrwm=342V, 0.73A, 400W(1ms)	DO-214AC	1d	1a	Eic
P5G4	-	STBP5G4	TVS	Vbr=418..462V, Vrwm=376V, 1.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
P5G4	-	STUP5G4	TVS	Vbr=418..462V, Vrwm=376V, 1.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
P6	-	BB146	C-diode	TV-VHF-tuning, ext, Band, 30V, 20mA, 1.7..35pF(28..0.5V)	SOD-323	5d	1a	Phi
P6	-	BZD27C43P-M	Zener diode	40..46V, Zzt=24Ω, Izt=10mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
P6	-	CMOZ27L	Zener diode	25.65..28.35V, Izt=0.25mA, Zzt=150Ω, 250mW	SOD-523	6d	1a	Cen
P6	-	HVC136	PIN-diode	Ant-Sw, 65V, 100mA, 150mW, 0.45pF, <2.5Ω(2mA/100MHz)	UFP	6d	1b	Hit
P6	-	MMSZ5266B-V-G	Zener diode	68V±5%, Izt=1.8mA, Zzt=230Ω, 500mW	SOD-123	5d	1kb	Vs
P6	-	RKZ24B2KK	Zener diode	23.72..24.78V, Izt=5mA, Zzt=60Ω, 150mW	SFP	7d	1a	Ren
P6	-	RKZ24B2KL	Zener diode	23.72..24.78V, Izt=2mA, Zzt=60Ω, 100mW	EFP	7d	1a	Ren
P7	-	BB147	C-diode	TV-VHF-tuning, ext, Band, 30V, 20mA, 2.4..92pF(28..0.5V)	SOD-323	5d	1a	Phi
P7	-	BZD27C47P-M	Zener diode	44..50V, Zzt=24Ω, Izt=10mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
P7	-	CMOZ30L	Zener diode	28.50..31.50V, Izt=0.25mA, Zzt=200Ω, 250mW	SOD-523	6d	1a	Cen
P7	-	MMSZ5267B-V-G	Zener diode	75V±5%, Izt=1.7mA, Zzt=270Ω, 500mW	SOD-123	5d	1kb	Vs
P7	-	RKZ27BKL	Zener diode	25.10..28.9V, Izt=2mA, Zzt=70Ω, 100mW	EFP	7d	1a	Ren
P8	-	BB148	C-diode	TV-VHF/CATV-tuning, 30V, 20mA, 2.4..36.8pF(28..1V)	SOD-323	5d	1a	Phi
P8	-	BZD27C51P-M	Zener diode	48..54V, Zzt=25Ω, Izt=10mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
P8	-	BZT52C11WT	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523	6d	1a	Ttr
P8	-	CMOZ33L	Zener diode	31.35..34.65V, Izt=0.25mA, Zzt=250Ω, 250mW	SOD-523	6d	1a	Cen
P8	-	MM5Z11H	Zener diode	10.4..11.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523	6d	1a	Zow
P8	-	MM5Z11V	Zener diode	11V±5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-523	6d	1a	Eic
P8	-	RKZ27BKK	Zener diode	25.10..28.9V, Izt=2mA, Zzt=70Ω, 150mW	SFP	7d	1a	Ren
P8	-	RKZ30BKL	Zener diode	28.0..32.0V, Izt=2mA, Zzt=80Ω, 100mW	EFP	7d	1a	Ren
P9	-	BB149	C-diode	TV-UHF-tuning, 30V, 20mA, 1.9..18pF(28..1V)	SOD-323	5d	1a	Phi
P9	-	BZD27C56P-M	Zener diode	52..60V, Zzt=25Ω, Izt=10mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
P9	-	CMOZ36L	Zener diode	34.20..37.80V, Izt=0.25mA, Zzt=200Ω, 250mW	SOD-523	6d	1a	Cen
P9	-	MM3Z5253B	Zener diode	25V±5%, Izt=5mA, Zzt=35Ω, 200mW	SOD-323FL	7d	1a	Bts
P9	-	MM3Z5253BH	Zener diode	23.75..26.25V, Izt=5.23mA, Zzt=35Ω, 300mW	SOD-323	5d	1a	Zow
P9	-	RKZ30BKK	Zener diode	28.0..32.0V, Izt=2mA, Zzt=80Ω, 150mW	SFP	7d	1a	Ren
PA	-	BB151	C-diode	VCO, 10V, 20mA, 9..19.1pF(4..0.5V)	SOD-323	5d	1a	Phi
PA	-	BZT52C30W	Zener diode	28.50..31.50V, Izt=2mA, Zzt=80Ω, 500mW	SOD-123	5d	1a	Jiy
PA	-	MA2Q735	Si-diode	SBR, HF, 30V, 1A, Vf<0.5V(1A), 50pF, 30ns	SOD-106	1d	1a	Pan
PA	-	MA735	Si-diode	SBR, HF, 30V, 1A, Vf<0.5V(1A), 50pF, 30ns	SOD-106	1d	1a	Pan
PA	-	TV06B141K-G	TVS	Vrwm=140V, Vbr=155.68..190.4V, Ipp=2.6A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PB	-	BB152	C-diode	TV-UHF-tuning, 32V, 20mA, 2.48..52pF(28..1V)	SOD-323	5d	1a	Phi
PB	-	BZT52C33W	Zener diode	31.35..34.65V, Izt=2mA, Zzt=80Ω, 500mW	SOD-123	5d	1a	Jiy
PB	-	ESH1PB	Si-diode	Rectifier, 100V, 1A, Vf<0.92V(1A)	DO-220AA	8d	1k	Vs
PB	-	KDZ6.8B	Zener diode	6.8V±2.5%, 40mA, 1W	PMDU	7d	1s	Rhm
PB	-	MA2Q736	Si-diode	SBR, HF, 40V, 1A, Vf<0.55V(1A), 50pF, 30ns	SOD-106	1d	1a	Pan
PB	-	MA736	Si-diode	SBR, HF, 40V, 1A, Vf<0.55V(1A), 50pF, 30ns	SOD-106	1d	1a	Pan
PB	-	P4SMA82CA	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
PB	-	SMF140CA	TVS	Vrwm=140V, Vbr=155.0..171.0V, 0.89A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
PB	-	TV02W141B-G	TVS	Vrwm=140V, Vbr=155..171V, Ipp=0.89A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
PB	-	TV06B141J-G	TVS	Vrwm=140V, Vbr=155.0..171.0V, Ipp=2.9A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PC	-	BB153	C-diode	TV-UHF-tuning, 32V, 20mA, 2.36..34.6pF(28..1V)	SOD-323	5d	1a	Phi
PC	-	BZT52C36W	Zener diode	34.20..37.80V, Izt=2mA, Zzt=90Ω, 500mW	SOD-123	5d	1a	Jiy
PC	-	ESH1PC	Si-diode	Rectifier, 150V, 1A, Vf<0.92V(1A)	DO-220AA	8d	1k	Vs
PC	-	MA2Q737	Si-diode	SBR, HF, 30V, 1.5A, Vf<0.5V(1A), 70pF, 50ns	SOD-106	1d	1a	Pan
PC	-	MA737	Si-diode	SBR, HF, 30V, 1.5A, Vf<0.5V(1A), 70pF, 50ns	SOD-106	1d	1a	Pan
PC	-	P4SMA91CA	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
PD	-	BZT52C39W	Zener diode	37.05..40.95V, Izt=2mA, Zzt=130Ω, 500mW	SOD-123	5d	1a	Jiy
PD	-	ESH1PD	Si-diode	Rectifier, 200V, 1A, Vf<0.92V(1A)	DO-220AA	8d	1k	Vs
PD	-	MA2Q738	Si-diode	SBR, HF, 40V, 1.5A, Vf<0.55V(1A), 70pF, 50ns	SOD-106	1d	1a	Pan
PD	-	MA738	Si-diode	SBR, HF, 40V, 1.5A, Vf<0.55V(1A), 70pF, 50ns	SOD-106	1d	1a	Pan
PD	-	P6SMB6V8C	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 57.1A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PD	-	P6SMBJ110	TVS	Vrwm=110V, Vbr=99..121V, 3.8A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PD	-	SMBG110	TVS	Vrwm=110V, Vbr=122..154.5V, 3.0A, 600W(1ms)	DO-215AA	5d	1k	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
PD	-	SMBJ110	TVS	Vrwm=110V, Vbr=122..154.5V, 3.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
PD	-	TV06B111K-G	TVS	Vrwm=110.0V, Vbr=122.0..149.0V, Ipp=3.06A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PDL	-	SMLJ7.0	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=225.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PDM	-	3.0SMCJ7.0A	TVS	Vbr=7.78..8.95V, Vrwm=7.0V, 250A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PDM	-	SMDJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=250.0A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PDM	-	SMDJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=250.0A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PDM	-	SMLJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=250.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PDMH	-	SMDJ7.0A-HRA	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=250.0A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PDN	-	SMLJ7.5	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, Ipp=209.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PDO	-	SMLJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=232.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PDP	-	3.0SMCJ7.5A	TVS	Vbr=8.33..9.58V, Vrwm=7.5V, 232.6A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PDP	-	SMDJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=232.6A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PDP	-	SMDJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=232.6A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PDP	-	SMLJ8.0	TVS	Vrwm=8.0V, Vbr=8.89..10.9V, Ipp=200.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PDPH	-	SMDJ7.5A-HRA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, Ipp=232.6A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PDQ	-	SMLJ8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=220.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PDR	-	3.0SMCJ8.0A	TVS	Vbr=8.89..10.23V, Vrwm=8.0V, 220.6A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PDR	-	SMDJ8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=220.6A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PDR	-	SMDJ8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=220.6A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PDR	-	SMLJ8.5	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, Ipp=188.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PDRH	-	SMDJ8.0A-HRA	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=220.6A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PDS	-	SMLJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, Ipp=208.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PDT	-	3.0SMCJ8.5A	TVS	Vbr=9.44..10.82V, Vrwm=8.5V, 208.4A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PDT	-	SMDJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.40V, Ipp=208.3A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PDT	-	SMDJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.40V, Ipp=208.3A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PDT	-	SMLJ9.0	TVS	Vrwm=9.0V, Vbr=10.0..12.2V, Ipp=177.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PDTH	-	SMDJ8.5A-HRA	TVS	Vrwm=8.5V, Vbr=9.44..10.40V, Ipp=208.3A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PDU	-	SMLJ9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, Ipp=194.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PDV	-	3.0SMCJ9.0A	TVS	Vbr=10.0..11.5V, Vrwm=9.0V, 194.8A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PDV	-	SMDJ9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=194.8A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PDV	-	SMDJ9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=194.8A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PDV	-	SMLJ10	TVS	Vrwm=10V, Vbr=11.1..13.6V, Ipp=159.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PDVH	-	SMDJ9.0A-HRA	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=194.8A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PDW	-	SMLJ10A	TVS	Vrwm=10V, Vbr=11.1..12.3V, Ipp=176.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PDX	-	3.0SMCJ10A	TVS	Vbr=11.1..12.8V, Vrwm=10V, 176.4A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PDX	-	SMDJ10A	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=176.5A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PDX	-	SMDJ10A	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=176.5A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PDX	-	SMLJ11	TVS	Vrwm=11V, Vbr=12.2..14.9V, Ipp=149.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PDXH	-	SMDJ10A-HRA	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=176.5A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PDY	-	SMLJ11A	TVS	Vrwm=11V, Vbr=12.2..13.5V, Ipp=164.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PDZ	-	3.0SMCJ11A	TVS	Vbr=12.2..14.0V, Vrwm=11V, 184.8A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PDZ	-	SMDJ11A	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=164.8A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PDZ	-	SMDJ11A	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=164.8A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PDZ	-	SMLJ12	TVS	Vrwm=12V, Vbr=13.3..16.3V, Ipp=136.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PDZH	-	SMDJ11A-HRA	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=164.8A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PE	-	1SMB110A	TVS	Vrwm=110V, 3.4A, 600W(1ms)	403A	3d	1s	Ons
PE	-	3.0SMB130A	Zener diode	122.0..140.50V, Zzt=375Ω, Izt=5.8mA, 3W	DO-214AA	1d	1b	Rul
PE	-	BB155	C-diode	Mobile Comm, VCO, 10V, 20mA, 24.5..45.2pF(2.82..0.34V)	SOD-323	5d	1a	Phi
PE	-	CD214B-T110A	TVS	Vrwm=110V, Irsm=3.4A, 600W(1ms)	DO-214AA	1d	1a	Brn
PE	-	MA2Q739	Si-diode	SBR, HF, 90V, 800mA, Vf<0.8V(700mA), 50pF, 100ns	SOD-106	1d	1a	Pan
PE	-	MA739	Si-diode	SBR, HF, 90V, 800mA, Vf<0.8V(700mA), 50pF, 100ns	SOD-106	1d	1a	Pan
PE	-	P6SMB6V8CA	TVS	Vrwm=6.8V, Vbr=6.45..7.14V, 57.1A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PE	-	P6SMBJ110A	TVS	Vrwm=110V, Vbr=105..116V, 4A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PE	-	SMBG110A	TVS	Vrwm=110V, Vbr=122..154.5V, 3.0A, 600W(1ms)	DO-215AA	5d	1k	Vs
PE	-	SMBJ110A	TVS	Vrwm=110V, Vbr=122..154.5V, 3.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
PE	-	SMBJ110A	TVS	Vrwm=110V, Vbr=122..154.5V, 3.0A, 600W(1ms)	DO-214AA	1d	1m	Di
PE	-	SMF110A	TVS	Vrwm=110V, Vbr=122..135V, 1.0A, 200W(1ms)	SOD-123FL	7d	1a	Eic
PE	-	SMF110CA	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, 1.13A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
PE	-	SMF26A-M	ESDP-diode	Vbr=28.9V, Vrwm=26V, Ipp=4.8A, 200W(1ms)	SMF	7d	2y	Vs
PE	-	TV02W111B-G	TVS	Vrwm=110V, Vbr=122..135V, Ipp=1.13A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
PE	-	TV06B111J-G	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=3.39A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PED	-	SMLJ12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=150.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PEE	-	3.0SMCJ12A	TVS	Vbr=13.3..15.3V, Vrwm=12V, 150.6A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PEE	-	SMDJ12A	TVS	Vrwm=12V, Vbr=13.30..14.70V, Ipp=150.8A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PEE	-	SMDJ12A	TVS	Vrwm=12V, Vbr=13.30..14.70V, Ipp=150.8A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PEEH	-	SMDJ12A-HRA	TVS	Vrwm=12.0V, Vbr=13.30..14.70V, Ipp=150.8A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PEF	-	SMLJ13	TVS	Vrwm=13V, Vbr=14.4..17.6V, Ipp=126.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PEG	-	3.0SMCJ13A	TVS	Vbr=14.4..16.5V, Vrwm=13V, 139.4A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PEG	-	SMDJ13A	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=139.5A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PEG	-	SMDJ13A	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=139.5A, 3000W(1ms)	DO-214AB	1d	1b	Mde

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
PEG	-	SMLJ13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, Ipp=139.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PEGH	-	SMDJ13A-HRA	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=139.5A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PEH	-	SMLJ14	TVS	Vrwm=14V, Vbr=15.6..19.1V, Ipp=116.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PEK	-	3.0SMCJ14A	TVS	Vbr=15.6..17.9V, Vrwm=14V, 129.4A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PEK	-	SMDJ14A	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=129.3A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PEK	-	SMDJ14A	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=129.3A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PEK	-	SMLJ14A	TVS	Vrwm=14V, Vbr=15.6..17.2V, Ipp=129.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PEKH	-	SMDJ14A-HRA	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=129.3A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PEL	-	SMLJ15	TVS	Vrwm=15V, Vbr=16.7..20.4V, Ipp=111.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PEM	-	3.0SMCJ15A	TVS	Vbr=16.7..19.2V, Vrwm=15V, 123.0A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PEM	-	SMDJ15A	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=123.0A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PEM	-	SMDJ15A	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=123.0A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PEM	-	SMLJ15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, Ipp=123.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PEMH	-	SMDJ15A-HRA	TVS	Vrwm=15.0V, Vbr=16.70..18.50V, Ipp=123.0A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PEN	-	SMLJ16	TVS	Vrwm=16V, Vbr=17.8..21.8V, Ipp=104.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PEP	-	3.0SMCJ16A	TVS	Vbr=17.8..20.5V, Vrwm=16V, 115.4A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PEP	-	SMDJ16A	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=115.4A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PEP	-	SMDJ16A	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=115.4A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PEP	-	SMLJ16A	TVS	Vrwm=16V, Vbr=17.8..19.7V, Ipp=115.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PEPH	-	SMDJ16A-HRA	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=115.4A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PEQ	-	SMLJ17	TVS	Vrwm=17V, Vbr=18.9..23.1V, Ipp=98.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PER	-	3.0SMCJ17A	TVS	Vbr=18.9..21.7V, Vrwm=17V, 106.6A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PER	-	SMDJ17A	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=108.7A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PER	-	SMDJ17A	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=108.7A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PER	-	SMLJ17A	TVS	Vrwm=17V, Vbr=18.9..20.9V, Ipp=106.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PERH	-	SMDJ17A-HRA	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=108.7A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PES	-	SMLJ18	TVS	Vrwm=18V, Vbr=20.0..24.4V, Ipp=93.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PET	-	SMDJ18A	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=102.7A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PET	-	SMDJ18A	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=102.7A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PET	-	SMLJ18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, Ipp=102.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PETH	-	SMDJ18A-HRA	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=102.7A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PEU	-	SMLJ20	TVS	Vrwm=20V, Vbr=22.2..27.1V, Ipp=83.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PEV	-	3.0SMCJ20A	TVS	Vbr=22.2..25.5V, Vrwm=20V, 92.6A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PEV	-	SMDJ20A	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=92.6A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PEV	-	SMDJ20A	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=92.6A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PEV	-	SMLJ20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, Ipp=92.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PEVH	-	SMDJ20A-HRA	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=92.6A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PEW	-	SMLJ22	TVS	Vrwm=22V, Vbr=24.4..29.8V, Ipp=76.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PEX	-	3.0SMCJ22A	TVS	Vbr=24.4..28.0V, Vrwm=22V, 84.4A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PEX	-	SMDJ22A	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=84.5A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PEX	-	SMDJ22A	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=84.5A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PEX	-	SMLJ22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, Ipp=84.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PEXH	-	SMDJ22A-HRA	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=84.5A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PEY	-	SMLJ24	TVS	Vrwm=24V, Vbr=26.7..32.6V, Ipp=69.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PEZ	-	3.0SMCJ24A	TVS	Vbr=26.7..30.7V, Vrwm=24V, 77.2A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PEZ	-	SMDJ24A	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=77.1A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PEZ	-	SMDJ24A	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=77.1A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PEZ	-	SMLJ24A	TVS	Vrwm=24V, Vbr=26.7..29.5V, Ipp=77.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PEZH	-	SMDJ24A-HRA	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=77.1A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PF	-	BB156	C-diode	VCO, 10V, 20mA, 4.2..14.4pF(7.5..1V), <0.4Ω	SOD-323	5d	1a	Phi
PF	-	BB156	C-diode	VCO, 10V, 20mA, 4.2..14.4pF(7.5..1V), <0.4Ω	SOD-323	5d	1a	Phi
PF	-	KDZ7.5FV	Zener diode	7.0..7.90V, Izt=5mA, Zzt=23Ω, 100mW	TFSC	7d	1a	Kec
PF	-	MAZD180	Zener diode	16.9..19.1V, Zzt=60Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
PF	-	P6SMB7V5C	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 53.1A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PF	-	P6SMBJ120	TVS	Vrwm=120V, Vbr=108..132V, 3.5A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PF	-	SMBG120	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms)	DO-215AA	5d	1k	Vs
PF	-	SMBJ120	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
PF	-	TV06B121K-G	TVS	Vrwm=120.0V, Vbr=133.0..163.0V, Ipp=2.8A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PFD	-	SMLJ26	TVS	Vrwm=26V, Vbr=28.9..35.3V, Ipp=64.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFE	-	3.0SMCJ26A	TVS	Vbr=28.9..33.2V, Vrwm=26V, 71.2A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PFE	-	SMDJ26A	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=71.3A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PFE	-	SMDJ26A	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=71.3A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFE	-	SMLJ26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, Ipp=71.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFEH	-	SMDJ26A-HRA	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=71.3A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFF	-	SMLJ28	TVS	Vrwm=28V, Vbr=31.1..38.0V, Ipp=60.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFG	-	3.0SMCJ28A	TVS	Vbr=31.1..35.8V, Vrwm=28V, 66.0A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PFG	-	SMDJ28A	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=66.1A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PFG	-	SMDJ28A	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=66.1A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFG	-	SMLJ28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, Ipp=66.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFGH	-	SMDJ28A-HRA	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=66.1A, 3000W(1ms)	DO-214AB	1d	2s	Lif

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
PFH	-	SMLJ30	TVS	Vrwm=30V, Vbr=33.3..40.7V, Ipp=56.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFK	-	3.0SMCJ30A	TVS	Vbr=33.3..38.3V, Vrwm=30V, 62.0A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PFK	-	SMDJ30A	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=62.0A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFK	-	SMDJ30A	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=62.0A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PFK	-	SMLJ30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, Ipp=62.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFKH	-	SMDJ30A-HRA	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=62.0A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFL	-	SMLJ33	TVS	Vrwm=33V, Vbr=36.7..44.9V, Ipp=50.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFM	-	3.0SMCJ33A	TVS	Vbr=36.7..42.2V, Vrwm=33V, 56.2A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PFM	-	SMDJ33A	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=56.3A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PFM	-	SMDJ33A	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=56.3A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFM	-	SMLJ33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, Ipp=56.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFMH	-	SMDJ33A-HRA	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=56.3A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFN	-	SMLJ36	TVS	Vrwm=36V, Vbr=40.0..48.9V, Ipp=46.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFP	-	3.0SMCJ36A	TVS	Vbr=40.0..46.0V, Vrwm=36V, 51.6A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PFP	-	SMDJ36A	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=51.6A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFP	-	SMDJ36A	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=51.6A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PFP	-	SMLJ36A	TVS	Vrwm=36V, Vbr=40.0..44.2V, Ipp=51.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFPH	-	SMDJ36A-HRA	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=51.6A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFQ	-	SMLJ40	TVS	Vrwm=40V, Vbr=44.4..54.3V, Ipp=42.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFR	-	3.0SMCJ40A	TVS	Vbr=44.4..51.1V, Vrwm=40V, 46.4A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PFR	-	SMDJ40A	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=46.5A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PFR	-	SMDJ40A	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=46.5A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFR	-	SMLJ40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, Ipp=46.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFRH	-	SMDJ40A-HRA	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=46.5A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFS	-	SMLJ43	TVS	Vrwm=43V, Vbr=47.8..58.4V, Ipp=39.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFT	-	3.0SMCJ43A	TVS	Vbr=47.8..54.9V, Vrwm=43V, 43.2A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PFT	-	SMDJ43A	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=43.2A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFT	-	SMDJ43A	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=43.2A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PFT	-	SMLJ43A	TVS	Vrwm=43V, Vbr=47.8..52.8V, Ipp=43.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFTH	-	SMDJ43A-HRA	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=43.2A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFU	-	SMLJ45	TVS	Vrwm=45V, Vbr=50.0..61.1V, Ipp=37.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFV	-	3.0SMCJ45A	TVS	Vbr=50.0..57.5V, Vrwm=45V, 41.2A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PFV	-	SMDJ45A	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=41.3A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PFV	-	SMDJ45A	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=41.3A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFV	-	SMLJ45A	TVS	Vrwm=45V, Vbr=50.0..55.3V, Ipp=41.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFVH	-	SMDJ45A-HRA	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=41.3A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFW	-	SMLJ48	TVS	Vrwm=48V, Vbr=53.3..65.1V, Ipp=35.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFX	-	3.0SMCJ48A	TVS	Vbr=53.3..61.3V, Vrwm=48V, 38.8A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PFX	-	SMDJ48A	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=38.8A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PFX	-	SMDJ48A	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=38.8A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFX	-	SMLJ48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, Ipp=38.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFXH	-	SMDJ48A-HRA	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=38.8A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFY	-	SMLJ51	TVS	Vrwm=51V, Vbr=56.7..69.3V, Ipp=37.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFZ	-	3.0SMCJ51A	TVS	Vbr=56.7..65.2V, Vrwm=51V, 36.4A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PFZ	-	SMDJ51A	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=36.4A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PFZ	-	SMDJ51A	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=36.4A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PFZ	-	SMLJ51A	TVS	Vrwm=51V, Vbr=56.7..62.7V, Ipp=36.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PFZH	-	SMDJ51A-HRA	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=36.4A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PG	-	1SMB120A	TVS	Vrwm=120V, 3.1A, 600W(1ms)	403A	3d	1s	Ons
PG	-	3.0SMB140A	Zener diode	133.0..153.0V, Zzt=475Ω, Izt=5.3mA, 3W	DO-214AA	1d	1b	Rul
PG	-	BB157	C-diode	VCO, VHF-TV tuning, 30V, 20mA, 2.76..43.8pF(28..1V)	SOD-323	5d	1a	Phi
PG	-	CD214B-T120A	TVS	Vrwm=120V, Irsm=3.1A, 600W(1ms)	DO-214AA	1d	1a	Brn
PG	-	P6SMB7V5CA	TVS	Vrwm=7.5V, Vbr=7.13..7.88V, 53.1A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PG	-	P6SMBJ120A	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PG	-	SMBG120A	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms)	DO-215AA	5d	1k	Vs
PG	-	SMBJ120A	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms)	DO-214AA	1d	1k	Vs
PG	-	SMBJ120A	TVS	Vrwm=120V, Vbr=133..169.0V, 2.8A, 600W(1ms)	DO-214AA	1d	1m	Di
PG	-	SMF120A	TVS	Vrwm=120V, Vbr=133..147V, 0.9A, 200W(1ms)	SOD-123FL	7d	1a	Eic
PG	-	SMF120CA	TVS	Vrwm=120.0V, Vbr=133.0.. 147.0V, 1.04A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
PG	-	SMF28A-M	ESDP-diode	Vbr=31.1V, Vrwm=28V, Ipp=4.4A, 200W(1ms)	SMF	7d	2y	Vs
PG	-	TV02W121B-G	TVS	Vrwm=120V, Vbr=133..147V, Ipp=1.04A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
PG	-	TV06B121J-G	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=3.1A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PGD	-	SMLJ54	TVS	Vrwm=54V, Vbr=60.0..73.3V, Ipp=31.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGE	-	3.0SMCJ54A	TVS	Vbr=60.0..69.0V, Vrwm=54V, 34.4A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PGE	-	SMLJ54A	TVS	Vrwm=54V, Vbr=60.0..66.3V, Ipp=34.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGF	-	SMLJ58	TVS	Vrwm=58V, Vbr=64.4..78.7V, Ipp=39.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGG	-	3.0SMCJ58A	TVS	Vbr=64.4..74.1V, Vrwm=58V, 32.0A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PGG	-	SMDJ58A	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=32.1A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGG	-	SMDJ58A	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=32.1A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PGG	-	SMLJ58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, Ipp=32.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
PGGH	-	SMDJ58A-HRA	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=32.1A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGH	-	SMLJ60	TVS	Vrwm=60V, Vbr=66.7..81.5V, Ipp=28.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGK	-	3.0SMCJ60A	TVS	Vbr=66.7..76.7V, Vrwm=60V, 31.0A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PGK	-	SMDJ60A	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=31.0A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGK	-	SMDJ60A	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=31.0A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PGK	-	SMLJ60A	TVS	Vrwm=60V, Vbr=66.7..73.7V, Ipp=31.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGKH	-	SMDJ60A-HRA	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=31.0A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGL	-	SMLJ64	TVS	Vrwm=64V, Vbr=71.1..86.9V, Ipp=26.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGM	-	3.0SMCJ64A	TVS	Vbr=71.1..81.8V, Vrwm=64V, 29.2A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PGM	-	SMDJ64A	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=29.1A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGM	-	SMDJ64A	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=29.1A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PGM	-	SMLJ64A	TVS	Vrwm=64V, Vbr=71.1..78.6V, Ipp=29.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGMH	-	SMDJ64A-HRA	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=29.1A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGN	-	SMLJ70	TVS	Vrwm=70V, Vbr=77.8..95.1V, Ipp=24.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGP	-	3.0SMCJ70A	TVS	Vbr=77.8..89.5V, Vrwm=70V, 26.6A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PGP	-	SMDJ70A	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=26.5A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PGP	-	SMDJ70A	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=26.5A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGP	-	SMLJ70A	TVS	Vrwm=70V, Vbr=77.8..86.0V, Ipp=26.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGPH	-	SMDJ70A-HRA	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=26.5A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGQ	-	SMLJ75	TVS	Vrwm=75V, Vbr=83.3..102V, Ipp=22.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGR	-	3.0SMCJ75A	TVS	Vbr=83.3..95.8V, Vrwm=75V, 24.8A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PGR	-	SMDJ75A	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=24.8A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PGR	-	SMDJ75A	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=24.8A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGR	-	SMLJ75A	TVS	Vrwm=75V, Vbr=83.3..92.1V, Ipp=24.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGRH	-	SMDJ75A-HRA	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=24.8A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGS	-	SMLJ78	TVS	Vrwm=78V, Vbr=86.7..106V, Ipp=21.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGT	-	3.0SMCJ78A	TVS	Vbr=86.7..99.7V, Vrwm=78V, 22.8A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PGT	-	SMDJ78A	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=23.8A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PGT	-	SMDJ78A	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=23.8A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGT	-	SMLJ78A	TVS	Vrwm=78V, Vbr=86.7..95.8V, Ipp=22.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGTH	-	SMDJ78A-HRA	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=23.8A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGU	-	SMLJ85	TVS	Vrwm=85V, Vbr=94.4..115V, Ipp=19.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGV	-	3.0SMCJ85A	TVS	Vbr=94.4..108.2V, Vrwm=85V, 20.8A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PGV	-	SMDJ85A	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=21.9A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PGV	-	SMDJ85A	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=21.9A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGV	-	SMLJ85A	TVS	Vrwm=85V, Vbr=94.4..104V, Ipp=20.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGVH	-	SMDJ85A-HRA	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=21.9A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGW	-	SMLJ90	TVS	Vrwm=90V, Vbr=100..122V, Ipp=18.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGX	-	3.0SMCJ90A	TVS	Vbr=100..115.5V, Vrwm=90V, 20.6A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PGX	-	SMDJ90A	TVS	Vrwm=90V, Vbr=100.0..111.0V, Ipp=20.5A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PGX	-	SMDJ90A	TVS	Vrwm=90V, Vbr=100.0..111.0V, Ipp=20.5A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGX	-	SMLJ90A	TVS	Vrwm=90V, Vbr=100..111V, Ipp=20.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGXH	-	SMDJ90A-HRA	TVS	Vrwm=90.0V, Vbr=100.0..111.0V, Ipp=20.5A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGY	-	SMLJ100	TVS	Vrwm=100V, Vbr=111..136V, Ipp=16.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGZ	-	3.0SMCJ100A	TVS	Vbr=111..128.0V, Vrwm=100V, 18.6A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PGZ	-	SMDJ100A	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=18.5A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PGZ	-	SMDJ100A	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=18.5A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PGZ	-	SMLJ100A	TVS	Vrwm=100V, Vbr=111..123V, Ipp=18.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PGZH	-	SMDJ100A-HRA	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=18.5A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PH	-	BB158	C-diode	TV-UHF-tuning, 19.5..2.25pF(1..28V)	SOD-323	5d	1a	Phi
PH	-	P6SMB8V2C	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 49.6A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PH	-	P6SMBJ130	TVS	Vrwm=130V, Vbr=117..143V, 3.2A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PH	-	SMBG130	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms)	DO-215AA	5d	1k	Vs
PH	-	SMBJ130	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
PH	-	TV06B131K-G	TVS	Vrwm=130V, Vbr=144.0..176.0V, Ipp=2.6A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PHD	-	SMLJ110	TVS	Vrwm=110V, Vbr=122..149V, Ipp=15.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PHE	-	3.0SMCJ110A	TVS	Vbr=122..140.5V, Vrwm=110V, 16.8A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PHE	-	SMDJ110A	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=16.9A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PHE	-	SMDJ110A	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=16.9A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PHE	-	SMLJ110A	TVS	Vrwm=110V, Vbr=122..135V, Ipp=16.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PHEH	-	SMDJ110A-HRA	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=16.9A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PHF	-	SMLJ120	TVS	Vrwm=120V, Vbr=133..163V, Ipp=14.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PHG	-	3.0SMCJ120A	TVS	Vbr=133..153.0V, Vrwm=120V, 15.6A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PHG	-	SMDJ120A	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=15.5A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PHG	-	SMDJ120A	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=15.5A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PHG	-	SMLJ120A	TVS	Vrwm=120V, Vbr=133..147V, Ipp=15.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PHGH	-	SMDJ120A-HRA	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=15.5A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PHH	-	SMLJ130	TVS	Vrwm=130V, Vbr=144..176V, Ipp=13.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PHK	-	3.0SMCJ130A	TVS	Vbr=144..165.5V, Vrwm=130V, 14.4A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PHK	-	SMDJ130A	TVS	Vrwm=130V, Vbr=144.0..159.0V, Ipp=14.4A, 3000W(1ms)	DO-214AB	1d	1b	Mde

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
PHK	-	SMDJ130A	TVS	Vrwm=130V, Vbr=144.0..159.0V, Ipp=14.4A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PHK	-	SMLJ130A	TVS	Vrwm=130V, Vbr=144..159V, Ipp=14.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PHKH	-	SMDJ130A-HRA	TVS	Vrwm=130.0V, Vbr=144.0..159.0V, Ipp=14.4A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PHL	-	SMLJ150	TVS	Vrwm=150V, Vbr=167..204V, Ipp=11.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PHM	-	3.0SMCJ150A	TVS	Vbr=167..192.5V, Vrwm=150V, 12.4A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PHM	-	SMDJ150A	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=12.3A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PHM	-	SMDJ150A	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=12.3A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PHM	-	SMLJ150A	TVS	Vrwm=150V, Vbr=167..185V, Ipp=12.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PHMH	-	SMDJ150A-HRA	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=12.3A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PHN	-	SMLJ160	TVS	Vrwm=160V, Vbr=178..218V, Ipp=10.4A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PHP	-	3.0SMCJ160A	TVS	Vbr=178..205.0V, Vrwm=160V, 11.6A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PHP	-	SMDJ160A	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=11.6A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PHP	-	SMDJ160A	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=11.6A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PHP	-	SMLJ160A	TVS	Vrwm=160V, Vbr=178..197V, Ipp=11.6A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PHPH	-	SMDJ160A-HRA	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=11.6A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PHQ	-	SMLJ170	TVS	Vrwm=170V, Vbr=189..231V, Ipp=9.8A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PHR	-	3.0SMCJ170A	TVS	Vbr=189..217.5V, Vrwm=170V, 11.0A, 3000W(1ms)	DO-214AB	1d	1g	Mde
PHR	-	SMDJ170A	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=10.9A, 3000W(1ms)	DO-214AB	1d	1b	Mde
PHR	-	SMDJ170A	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=10.9A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PHR	-	SMLJ170A	TVS	Vrwm=170V, Vbr=189..209V, Ipp=11.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
PHRH	-	SMDJ170A-HRA	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=10.9A, 3000W(1ms)	DO-214AB	1d	2s	Lif
PI	-	P4SMA100CA	TVS	Vbr=95.0..105V, Vrwm=85.5V, 3.1A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
PJ	-	BB159	C-diode	TV-UHF-tuning, 30V, 20mA, 19.5..2.25pF(1..28V)	SOD-323	5d	1a	Phi
PJ	-	DDZ20C	Zener diode	20V±5%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
PJ	-	DDZ20CS	Zener diode	20V±5%, Izt=10mA, 200mW	SOD-323	5d	1d	Di
PJ	-	P4SMA110CA	TVS	Vbr=99.0..121V, Vrwm=89.2V, 2.7A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
PK	-	1SMB130A	TVS	Vrwm=130V, 2.9A, 600W(1ms)	403A	3d	1s	Ons
PK	-	3.0SMB150A	Zener diode	144.0..165.50V, Zzt=550Ω, Izt=5.0mA, 3W	DO-214AA	1d	1b	Rul
PK	-	BB164	C-diode	TV-VHF-tuning, 30V, 20mA, 62..2.9pF(1..28V), 160MHz	SOD-323	5d	1a	Phi
PK	-	CD214B-T130A	TVS	Vrwm=130V, Irsm=2.9A, 600W(1ms)	DO-214AA	1d	1a	Brn
PK	-	MA10705	Si-diode	SBR, HF, 30V, 1.5A, Vf<0.37V(1A), 90pF, 50ns	SOD-106	1d	1a	Pan
PK	-	MA2Q705	Si-diode	SBR, HF, 30V, 1.5A, Vf<0.37V(1A), 90pF, 50ns	SOD-106	1d	1a	Pan
PK	-	P6SMB8V2CA	TVS	Vrwm=8.2V, Vbr=7.79..8.61V, 49.6A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PK	-	P6SMBJ130A	TVS	Vrwm=130V, Vbr=124..137V, 3.3A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PK	-	SMBG130A	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms)	DO-215AA	5d	1k	Vs
PK	-	SMBJ130A	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms)	DO-214AA	1d	1k	Vs
PK	-	SMBJ130A	TVS	Vrwm=130V, Vbr=144..182.5V, 2.6A, 600W(1ms)	DO-214AA	1d	1m	Di
PK	-	SMF130A	TVS	Vrwm=130V, Vbr=144..159V, 0.8A, 200W(1ms)	SOD-123FL	7d	1a	Eic
PK	-	SMF130CA	TVS	Vrwm=130V, Vbr=144.0..159.0V, 0.96A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
PK	-	SMF30A-M	ESDP-diode	Vbr=33.3V, Vrwm=30V, Ipp=4.1A, 200W(1ms)	SMF	7d	2y	Vs
PK	-	TV02W131B-G	TVS	Vrwm=130V, Vbr=144..159V, Ipp=0.96A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
PK	-	TV06B131J-G	TVS	Vrwm=130V, Vbr=144.0..159.0V, Ipp=2.9A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PK7	-	SM6T150A	TVS	Vrwm=128V, Vbr=143..158V, 2.9A, 600W(1ms)	DO-214AA	1d	1k	Vs
PK7	-	SM6T150CA	TVS	Vrwm=128V, Vbr=143..158V, 2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
PL	-	BB149A	C-diode	TV-UHF-tuning, 30V, 20mA, 1.8..18.22pF(28..1V)	SOD-323	5d	1a	Phi
PL	-	DDZ24C	Zener diode	24V±5%, Izt=5mA, 500mW	SOD-123	5d	1d	Di
PL	-	DDZ24CS	Zener diode	24V±5%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
PL	-	MA2QD01	Si-diode	SBR, HF, 60V, 1.5A, Vf<0.55V(1.5A), 110pF, 100ns	SOD-106	1d	1b	Pan
PL	-	P6SMB9V1C	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 44.8A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PL	-	P6SMBJ150	TVS	Vrwm=150V, br=135..165V, 2.2A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PL	-	SMBG150	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-215AA	5d	1k	Vs
PL	-	SMBJ150	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
PL	-	TV06B151K-G	TVS	Vrwm=150.0V, Vbr=167.0..204.0V, Ipp=2.2A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PL13	-	PLED13S	ESDP-diode	Vbr=13..26V, Vrwm=13V, 1A, 250V/µs	DO-214AA	1d	1a	Lif
PL6	-	PLED6S	ESDP-diode	Vbr=6..16V, Vrwm=6V, 1A, 250V/µs	DO-214AA	1d	1a	Lif
PL9	-	PLED9S	ESDP-diode	Vbr=9..18V, Vrwm=9V, 1A, 250V/µs	DO-214AA	1d	1a	Lif
PM	-	1SMB150A	TVS	Vrwm=150V, 2.5A, 600W(1ms)	403A	3d	1s	Ons
PM	-	3.0SMB180A	Zener diode	167.0..192.60V, Zzt=700Ω, Izt=4.2mA, 3W	DO-214AA	1d	1b	Rul
PM	-	CD214B-T150A	TVS	Vrwm=150V, Irsm=2.5A, 600W(1ms)	DO-214AA	1d	1a	Brn
PM	-	MA2QA01	Si-diode	SBR, 400V, 1A, Vf<1.1V(1A)	SOD-106	1d	1b	Pan
PM	-	P6SMB9V1CA	TVS	Vrwm=9.1V, Vbr=8.65..9.55V, 44.8A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PM	-	P6SMBJ150A	TVS	Vrwm=150V, br=135..165V, 2.5A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PM	-	SMBG150A	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-215AA	5d	1k	Vs
PM	-	SMBJ150A	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-214AA	1d	1m	Di
PM	-	SMBJ150A	TVS	Vrwm=150V, Vbr=167..211.5V, 2.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
PM	-	SMF150A	TVS	Vrwm=150V, Vbr=167..185V, 0.7A, 200W(1ms)	SOD-123FL	7d	1a	Eic
PM	-	SMF150CA	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, 0.82A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
PM	-	SMF33A-M	ESDP-diode	Vbr=36.7V, Vrwm=33V, Ipp=3.8A, 200W(1ms)	SMF	7d	2y	Vs
PM	-	TV02W151B-G	TVS	Vrwm=150V, Vbr=167..185V, Ipp=0.82A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
PM	-	TV06B151J-G	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=2.5A, 600W(1ms)	DO-214AA	1d	1a	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
PN	-	BB190	C-diode	Radio-UHF-Tun, 10V, 20mA, 15..6pF(2..10V), <0.4Ω (470MHz)	SOD-323	5d	1a	Phi
PN	-	MA2QA02	Si-diode	SBR, 600V, 1A, Vf<1.1V(1A)	SOD-106	1d	1b	Pan
PN	-	P6SMB10C	TVS	Vrwm=10V, Vbr=9.5..10.5V, 41.4A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PN	-	P6SMBJ160	TVS	Vrwm=160V, Vbr=144..176V, 2.1A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PN	-	SMBG160	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms)	DO-215AA	5d	1k	Vs
PN	-	SMBJ160	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
PN	-	TV06B161K-G	TVS	Vrwm=160.0V, Vbr=178.0..218.0V, Ipp=2.09A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PO	-	P4SMA120CA	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
PP	-	1N728WA	Si-diode	SBD, VHF/UHF-Dem, 30V, 30mA, Vf<1V(30mA), 1.5pF	SOD-323FL	7d	1a	Sme
PP	-	1SMB160A	TVS	Vrwm=160V, 2.3A, 600W(1ms)	403A	3d	1s	Ons
PP	-	3.0SMB190A	Zener diode	178.0..197.0V, Zzt=800Ω, Izt=4.0mA, 3W	DO-214AA	1d	1b	Rul
PP	-	CD214B-T160A	TVS	Vrwm=160V, Irsm=2.3A, 600W(1ms)	DO-214AA	1d	1a	Brn
PP	-	CMDZ6L8	Zener diode	6.460..7.140V, Izt=0.5mA, Zzt=60Ω, 250mW	SOD-323	5d	1a	Cen
PP	-	KDZ7.5FVY	Zener diode	7.28..7.60V, Izt=5mA, Zzt=23Ω, 100mW	TFSC	7d	1a	Kec
PP	-	MA2HD08	Si-diode	SBR, HF, 30V, 1A, Vf<0.3V(1A), 50pF, 15ns	SOD-106	1d	1a	Pan
PP	-	P6SMB10CA	TVS	Vrwm=10V, Vbr=9.5..10.5V, 41.4A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PP	-	P6SMBJ160A	TVS	Vrwm=160V, Vbr=144..176V, 2.3A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PP	-	SMBG160A	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms)	DO-215AA	5d	1k	Vs
PP	-	SMBJ160A	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms)	DO-214AA	1d	1m	Di
PP	-	SMBJ160A	TVS	Vrwm=160V, Vbr=178..226.0V, 2.1A, 600W(1ms)	DO-214AA	1d	1k	Vs
PP	-	SMF160A	TVS	Vrwm=160V, Vbr=178..197V, 0.7A, 200W(1ms)	SOD-123FL	7d	1a	Eic
PP	-	SMF160CA	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, 0.77A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
PP	-	SMF36A-M	ESDP-diode	Vbr=40.0V, Vrwm=36V, Ipp=3.4A, 200W(1ms)	SMF	7d	2y	Vs
PP	-	TV02W161B-G	TVS	Vrwm=160V, Vbr=178..197V, Ipp=0.77A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
PP	-	TV06B161J-G	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=2.32A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PQ	-	MA2HD07	Si-diode	SBR, HF, 30V, 1A, Vf<0.37V(1A), 50pF, 15ns	SOD-106	1d	1a	Pan
PQ	-	P6SMB11C	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38.5A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PQ	-	P6SMBJ170	TVS	Vrwm=170V, Vbr=153..187V, 2A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PQ	-	SMBG170	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms)	DO-215AA	5d	1k	Vs
PQ	-	SMBJ170	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
PQ	-	TV06B171K-G	TVS	Vrwm=170.0V, Vbr=189.0..231.0V, Ipp=1.97A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PR	-	1SMB170A	TVS	Vrwm=170V, 2.2A, 600W(1ms)	403A	3d	1s	Ons
PR	-	3.0SMB200A	Zener diode	189.0..209.0V, Zzt=875Ω, Izt=3.7mA, 3W	DO-214AA	1d	1b	Rul
PR	-	CD214B-T170A	TVS	Vrwm=170V, Irsm=2.2A, 600W(1ms)	DO-214AA	1d	1a	Brn
PR	-	MA2HD09	Si-diode	SBR, HF, 30V, 1A, Vf<0.4V(1A), 50pF, 15ns	SOD-106	1d	1a	Pan
PR	-	P6SMB11CA	TVS	Vrwm=11V, Vbr=10.5..11.6V, 38.5A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PR	-	P6SMBJ170A	TVS	Vrwm=170V, Vbr=153..187V, 2.2A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PR	-	SMBG170A	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms)	DO-215AA	5d	1k	Vs
PR	-	SMBJ170A	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
PR	-	SMBJ170A	TVS	Vrwm=170V, Vbr=189..239.5V, 2.0A, 600W(1ms)	DO-214AA	1d	1m	Di
PR	-	SMF170A	TVS	Vrwm=170V, Vbr=189..209V, 0.6A, 200W(1ms)	SOD-123FL	7d	1a	Eic
PR	-	SMF170CA	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, 0.73A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
PR	-	SMF40A-M	ESDP-diode	Vbr=44.4V, Vrwm=40V, Ipp=3.1A, 200W(1ms)	SMF	7d	2y	Vs
PR	-	TV02W171B-G	TVS	Vrwm=170V, Vbr=189..209V, Ipp=0.73A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
PR	-	TV06B171J-G	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=2.18A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PR7	-	SM6T200A	TVS	Vrwm=171V, Vbr=190..210V, 2.2A, 600W(1ms)	DO-214AA	1d	1k	Vs
PR7	-	SM6T200CA	TVS	Vrwm=171V, Vbr=190..210V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
PR8	-	SM6T220A	TVS	Vrwm=188V, Vbr=209..231V, 2.0A, 600W(1ms)	DO-214AA	1d	1k	Vs
PR8	-	SM6T220CA	TVS	Vrwm=188V, Vbr=209..231V, 2.0A, 600W(1ms), Bidir.	DO-214AA	1ba	1l	Vs
PS	-	P6SMB12C	TVS	Vrwm=12V, Vbr=11.4..12.6V, 35.9A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PS	-	P6SMBJ180	TVS	Vrwm=180V, Vbr=162..198V, 1.9A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PS	-	SMBG188A	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms)	DO-215AA	5d	1k	Vs
PS	-	SMBJ188A	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
PS	-	TV06B181K-G	TVS	Vrwm=180.0V, Vbr=200.16..244.80V, Ipp=1.86A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PT	-	P6SMB12CA	TVS	Vrwm=12V, Vbr=11.4..12.6V, 35.9A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PT	-	P6SMBJ180A	TVS	Vrwm=180V, Vbr=162..198V, 2.1A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PT	-	SMBG188	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms)	DO-215AA	5d	1k	Vs
PT	-	SMBJ12A822	TVS	Vrwm=12V, Vbr=13.3..16.9V, 27.3A, 600W(1ms)	DO-214AA	1d	1a	F
PT	-	SMBJ188	TVS	Vrwm=188V, Vbr=189..255V, 1.7A, 600W(1ms)	DO-214AA	1d	1k	Vs
PT	-	SMF180CA	TVS	Vrwm=180.0V, Vbr=200.0..220.0V, 0.69A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
PT	-	SMF43A-M	ESDP-diode	Vbr=47.8V, Vrwm=43V, Ipp=2.9A, 200W(1ms)	SMF	7d	2y	Vs
PT	-	TV02W181B-G	TVS	Vrwm=180V, Vbr=200..220V, Ipp=0.69A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
PT	-	TV06B181J-G	TVS	Vrwm=180.0V, Vbr=200.0..220.0V, Ipp=2.06A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PU	-	P6SMB13C	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PU	-	P6SMBJ190	TVS	Vrwm=190V, Vbr=209..267.9V, 1.8A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PU	-	TV06B191K-G	TVS	Vrwm=190.0V, Vbr=211.28..258.0V, Ipp=1.76A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PV	-	P6SMB13CA	TVS	Vrwm=13V, Vbr=12.4..13.7V, 33A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PV	-	P6SMBJ190A	TVS	Vrwm=190V, Vbr=209..267.9V, 2A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PV	-	SMF190CA	TVS	Vrwm=190.0V, Vbr=211.0..232.0V, 0.69A, 200W(10/1000µs), Bidir.	SOD-123FL	7ba	1j	Ers
PV	-	SMF45A-M	ESDP-diode	Vbr=50.0V, Vrwm=45V, Ipp=2.8A, 200W(1ms)	SMF	7d	2y	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
PV	-	TV02W191B-G	TVS	Vrwm=190V, Vbr=211..232V, Ipp=0.69A, 200W(1ms), Bidir.	SOD-123	5ba	2o	Cmc
PV	-	TV06B191J-G	TVS	Vrwm=190.0V, Vbr=211.0..232.0V, Ipp=1.95A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PW	-	P6SMB15C	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28.3A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PW	-	P6SMBJ200	TVS	Vrwm=200V, Vbr=180..220V, 1.7A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PW	-	TV06B201J-G	TVS	Vrwm=200.0V, Vbr=224.0..247.0V, Ipp=1.85A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PX	-	P6SMB15CA	TVS	Vrwm=15V, Vbr=14.3..15.8V, 28.3A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PX	-	SMF48A-M	ESDP-diode	Vbr=53.3V, Vrwm=48V, Ipp=2.6A, 200W(1ms)	SMF	7d	2y	Vs
PX	-	TV06B221J-G	TVS	Vrwm=220.0V, Vbr=246.0..272.0V, Ipp=1.69A, 600W(1ms)	DO-214AA	1d	1a	Cmc
PY	-	KDZ6.8VVY	Zener diode	6.65..6.93V, Izt=5mA, Zzt=25Ω, 100mW	VSC	7d	1a	Kec
PY	-	P6SMB16C	TVS	Vrwm=16V, Vbr=15.2..16.8V, 26.7A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PY	-	P6SMBJ210	TVS	Vrwm=210V, Vbr=231..296.1V, 1.6A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PZ	-	BZT52B22S	Zener diode	21.56..22.44V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323FL	7d	1a	Tsc
PZ	-	MM3Z22VB	Zener diode	21.56..22.44V, Zzt=51Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
PZ	-	MM3Z22VBW	Zener diode	21.56..22.44V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323FL	7d	1a	Tac
PZ	-	P6SMB16CA	TVS	Vrwm=16V, Vbr=15.2..16.8V, 26.7A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
PZ	-	P6SMBJ200A	TVS	Vrwm=200V, Vbr=180..220V, 1.9A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PZ	-	P6SMBJ210A	TVS	Vrwm=210V, Vbr=231..296.1V, 1.8A, 600W(1ms)	DO-214AA	1d	1a	Pjt
PZ	-	SMF51A-M	ESDP-diode	Vbr=56.7V, Vrwm=51V, Ipp=2.4A, 200W(1ms)	SMF	7d	2y	Vs
PZ	-	TCMM3Z22VB	Zener diode	22V±2%, Izt=5mA, Zzt=51Ω, 200mW	SOD-323FL	7d	1a	Tac
PZ	-	TV06B251J-G	TVS	Vrwm=250.0V, Vbr=279.0..309.0V, Ipp=1.48A, 600W(1ms)	DO-214AA	1d	1a	Cmc
Q	-	HVC202A	C-diode	UHF/VHF-tuning, 34V, 2.06..14.11pF(25V..2V/1MHz)	UFP	6d	1b	Ren
Q	-	MM9D15V	Zener diode	14.25..15.75V, Izt=5mA, Zzt=42Ω, 200mW	SOD-923	7d	1n	Wtr
Q	-	MM9D3V3	Zener diode	3.14..3.47V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1a	Wtr
Q	-	NZ9F15VT	Zener diode	14.25..15.75V, Izt=5mA, Zzt=42Ω, 200mW	SOD-923	7d	1n	Ons
Q	-	NZ9F3V3T	Zener diode	3.14..3.47V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1a	Ons
Q	-	NZ9F8V2ST	Zener diode	8.02..8.36V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	2m	Ons
Q	au	MMSZ5266BPT	Zener diode	64.60..71.40V, Izt=1.8mA, Zzt=230Ω, 225mW	SOD-523	6d	1a	Chm
Q.	au	MMSZ5266SPT	Zener diode	66.64..69.36V, Izt=1.8mA, Zzt=230Ω, 225mW	SOD-523	6d	1a	Chm
Q0	-	BZD27C62P-M	Zener diode	58..66V, Zzt=25Ω, Izt=10mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
Q0	-	MMPZ5247SPT	Zener diode	16.66..17.34V, Izt=5mA, Zzt=36Ω, 225mW	SOD-323	5d	1a	Chm
Q1	-	BZD27C68P-M	Zener diode	64..72V, Zzt=25Ω, Izt=10mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
Q1	-	FS5A	Si-diode	Rectifier, 50V, 5A, Vf<1.15V(5A), 60pF	DO-214AB	1d	2j	Fag
Q2	-	BZD27C75P-M	Zener diode	70..79V, Zzt=30Ω, Izt=10mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
Q2	-	FS5B	Si-diode	Rectifier, 100V, 5A, Vf<1.15V(5A), 60pF	DO-214AB	1d	2j	Fag
Q3	-	BZD27C82P-M	Zener diode	77..87V, Zzt=30Ω, Izt=10mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
Q3	-	FS5D	Si-diode	Rectifier, 200V, 5A, Vf<1.15V(5A), 60pF	DO-214AB	1d	2j	Fag
Q4	-	BZD27C91P-M	Zener diode	85..96V, Zzt=60Ω, Izt=5mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
Q4	-	FS5G	Si-diode	Rectifier, 400V, 5A, Vf<1.15V(5A), 60pF	DO-214AB	1d	2j	Fag
Q5	-	BZD27C100P-M	Zener diode	94..106V, Zzt=60Ω, Izt=5mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
Q5	-	FS5J	Si-diode	Rectifier, 600V, 5A, Vf<1.15V(5A), 60pF	DO-214AB	1d	2j	Fag
Q6	-	BZD27C110P-M	Zener diode	104..116V, Zzt=80Ω, Izt=5mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
Q6	-	FS5K	Si-diode	Rectifier, 800V, 5A, Vf<1.15V(5A), 60pF	DO-214AB	1d	2j	Fag
Q7	-	BZD27C120P-M	Zener diode	114..127V, Zzt=80Ω, Izt=5mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
Q7	-	FS5M	Si-diode	Rectifier, 1000, 5A, Vf<1.15V(5A), 60pF	DO-214AB	1d	2j	Fag
Q8	-	BZD27C130P-M	Zener diode	124..141V, Zzt=110Ω, Izt=5mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
Q8	-	BZT52C12WT	Zener diode	11.40..12.60V, Izt=5mA, Zzt=25Ω, 200mW	SOD-523	6d	1a	Ttr
Q8	-	MM5Z12H	Zener diode	11.4..12.7V, Izt=5mA, Zzt=25Ω, 200mW	SOD-523	6d	1a	Zow
Q8	-	MM5Z12V	Zener diode	12V±5%, Izt=5mA, Zzt=25Ω, 200mW	SOD-523	6d	1a	Eic
Q9	-	BZD27C150P-M	Zener diode	138..156V, Zzt=130Ω, Izt=5mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
QAA	-	SMP30-62	TVS	Vrwm=62V, 30A, 3W (1ms), Bidir.	DO-214AC	1ba	1r	Ste
QAB	-	SMP30-68	TVS	Vrwm=68V, 30A, 3W (1ms), Bidir.	DO-214AC	1ba	1r	Ste
QAC	-	SMP30-100	TVS	Vrwm=100V, 30A, 3W (1ms), Bidir.	DO-214AC	1ba	1r	Ste
QAD	-	SMP30-120	TVS	Vrwm=120V, 30A, 3W (1ms), Bidir.	DO-214AC	1ba	1r	Ste
QAE	-	SMP30-130	TVS	Vrwm=130V, 30A, 3W (1ms), Bidir.	DO-214AC	1ba	1r	Ste
QAF	-	SMP30-180	TVS	Vrwm=180V, 30A, 3W (1ms), Bidir.	DO-214AC	1ba	1r	Ste
QAG	-	SMP30-200	TVS	Vrwm=200V, 30A, 3W (1ms), Bidir.	DO-214AC	1ba	1r	Ste
QAH	-	SMP30-220	TVS	Vrwm=220V, 30A, 3W (1ms), Bidir.	DO-214AC	1ba	1r	Ste
QAI	-	SMP30-240	TVS	Vrwm=240V, 30A, 3W (1ms), Bidir.	DO-214AC	1ba	1r	Ste
QAJ	-	SMP30-270	TVS	Vrwm=270V, 30A, 3W (1ms), Bidir.	DO-214AC	1ba	1r	Ste
QB	-	KDZ7.5B	Zener diode	7.5V±2.5%, 40mA, 1W	PMDU	7d	1s	Rhm
QD	-	P6SMB18C	TVS	Vrwm=18V, Vbr=17.1..18.9V, 23.8A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QD	-	P6SMBJ220	TVS	Vrwm=220V, Vbr=198..242V, 1.5A, 600W(1ms)	DO-214AA	1d	1a	Pjt
QD	-	SM4T6V8	TVS	Vrwm=6.8V, 38A, 400W(1ms)	SOD-6	1d	1q	Ste
QE	-	1SMA5.0A	TVS	Vrwm=5V±5%, 43.5A, 400W (1ms)	403B-01	3d	2t	Ons
QE	-	P6SMB18CA	TVS	Vrwm=18V, Vbr=17.1..18.9V, 23.8A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QE	-	P6SMBJ220A	TVS	Vrwm=220V, Vbr=198..242V, 1.7A, 600W(1ms)	DO-214AA	1d	1a	Pjt
QE	-	SM4T6V8A	TVS	Vrwm=6.8V, 38A, 400W(1ms)	SOD-6	1d	1q	Ste
QE	-	TV06B301J-G	TVS	Vrwm=300.0V, Vbr=335.0..371.0V, Ipp=1.23A, 600W(1ms)	DO-214AA	1d	1a	Cmc
QF	-	KDZ24FV	Zener diode	22.80..25.60V, Izt=5mA, Zzt=40Ω, 100mW	TFSC	7d	1a	Kec
QF	-	P6SMB20C	TVS	Vrwm=20V, Vbr=19..21.0V, 21.7A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
QF	-	SM4T7V5	TVS	Vrwm=7.5V, 35.4A, 400W(1ms)	SOD-6	1d	1q	Ste
QG	-	1SMA6.0A	TVS	Vrwm=6V±5%, 38.8A, 400W (1ms)	403B-01	3d	2t	Ons
QG	-	P6SMB20CA	TVS	Vrwm=20V, Vbr=19..21.0V, 21.7A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QG	-	SM4T7V5A	TVS	Vrwm=7.5V, 35.4A, 400W(1ms)	SOD-6	1d	1q	Ste
QG	-	TV06B351J-G	TVS	Vrwm=350.0V, Vbr=391.0..432.0V, Ipp=1.06A, 600W(1ms)	DO-214AA	1d	1a	Cmc
QH	-	P6SMB22C	TVS	Vrwm=22V, Vbr=20.9..23.1V, 19.6A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QK	-	1SMA6.5A	TVS	Vrwm=6.5V±5%, 35.7A, 400W (1ms)	403B-01	3d	2t	Ons
QK	-	P6SMB22CA	TVS	Vrwm=22V, Vbr=20.9..23.1V, 19.6A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QK	-	TV06B401J-G	TVS	Vrwm=400.0V, Vbr=447.0..494.0V, Ipp=0.93A, 600W(1ms)	DO-214AA	1d	2o	Cmc
QL	-	P6SMB24C	TVS	Vrwm=24V, Vbr=22.8..25.2V, 18.1A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QM	-	1SMA7.0A	TVS	Vrwm=7V±5%, 33.3A, 400W (1ms)	403B-01	3d	2t	Ons
QM	-	P6SMB24CA	TVS	Vrwm=24V, Vbr=22.8..25.2V, 18.1A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QM	-	TV06B441J-G	TVS	Vrwm=440.0V, Vbr=492.0..543.0V, Ipp=0.84A, 600W(1ms)	DO-214AA	1d	2o	Cmc
QN	-	P6SMB27C	TVS	Vrwm=27V, Vbr=25.7..28.4V, 16A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QN	-	SM4T10	TVS	Vrwm=10V, 27.6A, 400W(1ms)	SOD-6	1d	1q	Ste
QP	-	1SMA7.5A	TVS	Vrwm=7.5V±5%, 31A, 400W (1ms)	403B-01	3d	2t	Ons
QP	-	CMDZ7L5	Zener diode	7.125..7.875V, Izt=0.5mA, Zzt=60Ω, 250mW	SOD-323	5d	1a	Cen
QP	-	KDZ24FVY	Zener diode	23.72..24.78V, Izt=5mA, Zzt=40Ω, 100mW	TFSC	7d	1a	Kec
QP	-	P6SMB27CA	TVS	Vrwm=27V, Vbr=25.7..28.4V, 16A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QP	-	SM4T10A	TVS	Vrwm=10V, 27.6A, 400W(1ms)	SOD-6	1d	1q	Ste
QQ	-	P6SMB30C	TVS	Vrwm=30V, Vbr=28.5..31.5V, 14.5A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QR	-	1SMA8.0A	TVS	Vrwm=8.5V±5%, 27.8A, 400W (1ms)	403B-01	3d	2t	Ons
QR	-	P6SMB30CA	TVS	Vrwm=30V, Vbr=28.5..31.5V, 14.5A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QS	-	P6SMB33C	TVS	Vrwm=33V, Vbr=31.4..34.7V, 131A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QS	-	SM4T12	TVS	Vrwm=12V, 24A, 400W(1ms)	SOD-6	1d	1q	Ste
QT	-	1SMA8.5A	TVS	Vrwm=8.5V±5%, 29.4A, 400W (1ms)	403B-01	3d	2t	Ons
QT	-	P6SMB33CA	TVS	Vrwm=33V, Vbr=31.4..34.7V, 131A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QT	-	SM4T12A	TVS	Vrwm=12V, 24A, 400W(1ms)	SOD-6	1d	1q	Ste
QU	-	P6SMB36C	TVS	Vrwm=36V, Vbr=34.2..37.8V, 12A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QV	-	1SMA9.0A	TVS	Vrwm=9V±5%, 26A, 400W (1ms)	403B-01	3d	2t	Ons
QV	-	P6SMB36CA	TVS	Vrwm=36V, Vbr=34.2..37.8V, 12A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QW	-	P6SMB39C	TVS	Vrwm=39V, Vbr=37.1..41V, 11.1A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QW	-	SM4T15	TVS	Vrwm=15V, 19A, 400W(1ms)	SOD-6	1d	1q	Ste
QX	-	1SMA10A	TVS	Vrwm=10V±5%, 23.5A, 400W(1ms)	403B-01	3d	2t	Ons
QX	-	P6SMB39CA	TVS	Vrwm=39V, Vbr=37.1..41V, 11.1A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QX	-	SM4T15A	TVS	Vrwm=15V, 19A, 400W(1ms)	SOD-6	1d	1q	Ste
QXC	-	1SMA10CA	TVS	Vrwm=10V±5%, 23.5A, 400W(1ms), Bidir.	403B-01	3ba	2t	Ons
QY	-	KDZ7.5VVY	Zener diode	7.28..7.60V, Izt=5mA, Zzt=23Ω, 100mW	VSC	7d	1a	Kec
QY	-	P6SMB43C	TVS	Vrwm=43V, Vbr=40.9..45.2V, 10.1A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QZ	-	1SMA11A	TVS	Vrwm=11V±5%, 22A, 400W(1ms)	403B-01	3d	2t	Ons
QZ	-	P6SMB43CA	TVS	Vrwm=43V, Vbr=40.9..45.2V, 10.1A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
QZC	-	1SMA11CA	TVS	Vrwm=11V±5%, 22.0A, 400W(1ms), Bidir.	403B-01	3ba	2t	Ons
R	-	HVU358	C-diode	VCO, 15V, 19/21pF(1V)	SOD-323	5d	1a	Ren
R	-	MAZS068	Zener diode	6.4..7.2V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
R	-	MM9D16V	Zener diode	15.20..16.80V, Izt=5mA, Zzt=50Ω, 200mW	SOD-923	7d	1n	Wtr
r	-	MMSZ5240BPT	Zener diode	10V±5%, Izt=20mA, Zzt=17Ω, 225mW	SOD-523	6d	1a	Chm
R	-	NZ9F16VT	Zener diode	15.20..16.80V, Izt=5mA, Zzt=50Ω, 200mW	SOD-923	7d	1n	Ons
R	-	NZ9F9V1ST	Zener diode	8.85..9.23V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	2m	Ons
R	au	MMSZ5267BPT	Zener diode	71.25..78.75V, Izt=1.7mA, Zzt=270Ω, 225mW	SOD-523	6d	1a	Chm
R	ba	BA585	PIN-diode	SATV Ant, Sw, Att., 2GHz, 50V, 50mA, Vf<1.1V(50mA), 0.4pF	SOD-123	5d	2	Sie
R	ba	BA595	PIN-diode	UHF TV-sat, 50V, 50mA, Vf<1.1V(50mA), 0.22pF, <2GHz	SOD-323	5d	2	Inf
R	bb	BA597	PIN-diode	Attenuator, 50V, 100mA, >10MHz	SOD-123	5d	2	Sie
R	bc	BB620	C-diode	VHF-TV/VTR-tuning, HBand, 30V, 20mA, 62/76pF	SOD-123	5d	2	Inf
R	bc	BB644	C-diode	VHF-tuning, 35V, 2.6/42pF(28/1V)	SOD-123	5d	2	Sie
R-	-	MAZS0680M	Zener diode	6.64..6.98V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
r.	-	MMSZ5240SPT	Zener diode	10V±5%, Izt=20mA, Zzt=17Ω, 225mW	SOD-523	6d	1a	Chm
R.	au	MMSZ5267SPT	Zener diode	73.50..76.50V, Izt=1.7mA, Zzt=270Ω, 225mW	SOD-523	6d	1a	Chm
R^	-	MAZS0680H	Zener diode	6.85..7.2V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
R_	-	MAZS0680L	Zener diode	6.44..6.77V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
R0	-	BZD27C160P-M	Zener diode	153..171V, Zzt=150Ω, Izt=5mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
R0	-	CMOZ39L	Zener diode	37.05..40.95V, Izt=0.25mA, Zzt=200Ω, 250mW	SOD-523	6d	1a	Cen
R0	-	MMPZ5248SPT	Zener diode	17.64..18.36V, Izt=5mA, Zzt=42Ω, 225mW	SOD-323	5d	1a	Chm
R1	-	BZD27C180P-M	Zener diode	168..191V, Zzt=180Ω, Izt=5mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
R1	-	CMOZ43L	Zener diode	40.85..45.15V, Izt=0.25mA, Zzt=250Ω, 250mW	SOD-523	6d	1a	Cen
R1	-	FS1A	Si-diode	Rectifier, 50V, 1A, Vf<1.1V(1A)	DO-214AC	1d	2j	Fag
R1	-	MM3Z5236B	Zener diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 200mW	SOD-323FL	7d	1a	Bts
R1	-	MM3Z5236BH	Zener diode	7.13..7.88V, Izt=20mA, Zzt=6Ω, 300mW	SOD-323	5d	1a	Zow
R1	-	PDZ2.4B	Zener diode	2.4V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
R10A	-	RGF10A	Si-diode	Rectifier, Fast-Recovery 50V, 1A, Vf<1.3V(1A), 150ns	DO-214AC	1d	1b	Zow
R10B	-	RGF10B	Si-diode	Rectifier, Fast-Recovery 100V, 1A, Vf<1.3V(1A), 150ns	DO-214AC	1d	1b	Zow

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
R10D	-	RGF10D	Si-diode	Rectifier, Fast-Recovery 200V, 1A, Vf<1.3V(1A), 150ns	DO-214AC	1d	1b	Zow
R10G	-	RGF10G	Si-diode	Rectifier, Fast-Recovery 400V, 1A, Vf<1.3V(1A), 150ns	DO-214AC	1d	1b	Zow
R10J	-	RGF10J	Si-diode	Rectifier, Fast-Recovery 600V, 1A, Vf<1.3V(1A), 250ns	DO-214AC	1d	1b	Zow
R10J	-	RGF10K	Si-diode	Rectifier, Fast-Recovery 800V, 1A, Vf<1.3V(1A), 500ns	DO-214AC	1d	1b	Zow
R10J	-	RGF10M	Si-diode	Rectifier, Fast-Recovery 1000V, 1A, Vf<1.3V(1A), 500ns	DO-214AC	1d	1b	Zow
R10JA	-	RGF10JA	Si-diode	Rectifier, Fast-Recovery 600V, 1A, Vf<1.3V(1A), 150ns	DO-214AC	1d	1b	Zow
R10JA	-	RGF10KA	Si-diode	Rectifier, Fast-Recovery 800V, 1A, Vf<1.3V(1A), 300ns	DO-214AC	1d	1b	Zow
R10JA	-	RGF10MA	Si-diode	Rectifier, Fast-Recovery 1000V, 1A, Vf<1.3V(1A), 300ns	DO-214AC	1d	1b	Zow
R13	-	MRA4003	Si-diode	Rectifier, 300V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1f	Ons
R14	-	MRA4004	Si-diode	Rectifier, 400V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1f	Ons
R15	-	MRA4005	Si-diode	Rectifier, 600V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1f	Ons
R16	-	MRA4006	Si-diode	Rectifier, 800V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1f	Ons
R17	-	MRA4007	Si-diode	Rectifier, 1000V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1f	Ons
R2	-	BZD27C200P-M	Zener diode	188..212V, Zzt=200Ω, Izt=5mA, 150W(1ms)	SOD-123FL	7d	1i	Vs
R2	-	CMOZ47L	Zener diode	44.65..49.35V, Izt=0.25mA, Zzt=250Ω, 250mW	SOD-523	6d	1a	Cen
R2	-	FS1B	Si-diode	Rectifier, 100V, 1A, Vf<1.1V(1A)	DO-214AC	1d	2j	Fag
R2	-	LMSZ5272BT1G	Zener diode	104.5..115.5V, Izt=1.1mA, 500mW	SOD-123	5d	1d	Lrc
R2	-	MM3Z5258B	Zener diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 200mW	SOD-323FL	7d	1a	Bts
R2	-	MM3Z5258BH	Zener diode	34.2..37.8V, Izt=3.4mA, Zzt=70Ω, 300mW	SOD-323	5d	1a	Zow
R2	-	PDZ2.7B	Zener diode	2.7V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
R20A	-	RGF20A	Si-diode	Rectifier, Fast-Recovery 50V, 2A, Vf<1.3V(2A), 150ns	DO-214AA	1d	1b	Zow
R20B	-	RGF20B	Si-diode	Rectifier, Fast-Recovery 100V, 2A, Vf<1.3V(2A), 150ns	DO-214AA	1d	1b	Zow
R20D	-	RGF20D	Si-diode	Rectifier, Fast-Recovery 200V, 2A, Vf<1.3V(2A), 150ns	DO-214AA	1d	1b	Zow
R20G	-	RGF20G	Si-diode	Rectifier, Fast-Recovery 400V, 2A, Vf<1.3V(2A), 150ns	DO-214AA	1d	1b	Zow
R20J	-	RGF20J	Si-diode	Rectifier, Fast-Recovery 600V, 2A, Vf<1.3V(2A), 250ns	DO-214AA	1d	1b	Zow
R20J	-	RGF20K	Si-diode	Rectifier, Fast-Recovery 800V, 2A, Vf<1.3V(2A), 500ns	DO-214AA	1d	1b	Zow
R20J	-	RGF20M	Si-diode	Rectifier, Fast-Recovery 1000V, 2A, Vf<1.3V(2A), 500ns	DO-214AA	1d	1b	Zow
R20JA	-	RGF20JA	Si-diode	Rectifier, Fast-Recovery 600V, 2A, Vf<1.3V(2A), 150ns	DO-214AA	1d	1b	Zow
R20JA	-	RGF20KA	Si-diode	Rectifier, Fast-Recovery 800V, 2A, Vf<1.3V(2A), 300ns	DO-214AA	1d	1b	Zow
R20JA	-	RGF20MA	Si-diode	Rectifier, Fast-Recovery 1000V, 2A, Vf<1.3V(2A), 300ns	DO-214AA	1d	1b	Zow
R3	-	FS1D	Si-diode	Rectifier, 200V, 1A, Vf<1.1V(1A)	DO-214AC	1d	2j	Fag
R3	-	PDZ3.0B	Zener diode	3.0V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
R30A	-	RGF30A	Si-diode	Rectifier, Fast-Recovery 50V, 3A, Vf<1.3V(3A), 150ns	DO-214AA	1d	1b	Zow
R30B	-	RGF30B	Si-diode	Rectifier, Fast-Recovery 100V, 3A, Vf<1.3V(3A), 150ns	DO-214AA	1d	1b	Zow
R30D	-	RGF30D	Si-diode	Rectifier, Fast-Recovery 200V, 3A, Vf<1.3V(3A), 150ns	DO-214AA	1d	1b	Zow
R30G	-	RGF30G	Si-diode	Rectifier, Fast-Recovery 400V, 3A, Vf<1.3V(3A), 150ns	DO-214AA	1d	1b	Zow
R30J	-	RGF30J	Si-diode	Rectifier, Fast-Recovery 600V, 3A, Vf<1.3V(3A), 250ns	DO-214AA	1d	1b	Zow
R30J	-	RGF30K	Si-diode	Rectifier, Fast-Recovery 800V, 3A, Vf<1.3V(3A), 500ns	DO-214AA	1d	1b	Zow
R30J	-	RGF30M	Si-diode	Rectifier, Fast-Recovery 1000V, 3A, Vf<1.3V(3A), 500ns	DO-214AA	1d	1b	Zow
R30JA	-	RGF30JA	Si-diode	Rectifier, Fast-Recovery 600V, 3A, Vf<1.3V(3A), 150ns	DO-214AA	1d	1b	Zow
R30JA	-	RGF30KA	Si-diode	Rectifier, Fast-Recovery 800V, 3A, Vf<1.3V(3A), 300ns	DO-214AA	1d	1b	Zow
R30JA	-	RGF30MA	Si-diode	Rectifier, Fast-Recovery 1000V, 3A, Vf<1.3V(3A), 300ns	DO-214AA	1d	1b	Zow
R4	-	FS1G	Si-diode	Rectifier, 400V, 1A, Vf<1.1V(1A), 4µs	DO-214AC	1d	2j	Fag
R4	-	MM1Z5236B	Zener diode	7.13..7.88V, Izt=20mA, Zzt=6Ω, 500mW	SOD-323FL	7d	1a	Eic
R4	-	MM1Z5236BH	Zener diode	7.13..7.88V, Izt=20mA, Zzt=6Ω, 500mW	SOD-123	5d	1a	Zow
R4	-	MMSZ5236B	Zener diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 500mW	SOD-123	5d	1a	Eic
R4	-	PDZ3.3B	Zener diode	3.3V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
R4	-	SS2040LL	Si-diode	SBR, 40V, 2A, Vf<0.45V(2A)	SOD-123FL	7d	1a	Pjt
R5	-	BZX584B24V	Zener diode	23.52..24.48V, Izt=5mA, Zzt=70Ω, 200mW	SOD-523FL	7d	1a	Tac
R5	-	FS1J	Si-diode	Rectifier, 600V, 1A, Vf<1.1V(1A), 4µs	DO-214AC	1d	2j	Fag
R5	-	MM1Z5258B	Zener diode	34.20..37.80V, Izt=3.4mA, Zzt=70Ω, 500mW	SOD-323FL	7d	1a	Eic
R5	-	MM1Z5258BH	Zener diode	34.2..37.8V, Izt=3.4mA, Zzt=70Ω, 500mW	SOD-123	5d	1a	Zow
R5	-	MM5Z24VB	Zener diode	23.52..24.48V, Izt=5mA, Zzt=70Ω, 200mW	SOD-523FL	7d	1a	Tac
R5	-	MMSZ5258B	Zener diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 500mW	SOD-123	5d	1a	Eic
R5	-	PDZ3.6B	Zener diode	3.6V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
R6	-	FS1K	Si-diode	Rectifier, 800V, 1A, Vf<1.1V(1A), 4µs	DO-214AC	1d	2j	Fag
R6	-	PDZ3.9B	Zener diode	3.9V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
R7	-	FS1M	Si-diode	Rectifier, 1000V, 1A, Vf<1.1V(1A), 4µs	DO-214AC	1d	2j	Fag
R7	-	PDZ4.3B	Zener diode	4.3V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
R8	-	BZT52C13WT	Zener diode	12.35..13.65V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	6d	1a	Ttr
R8	-	FS1MI	Si-diode	Rectifier, 1000V, 1.5A, Vf<1.1V(1A), 4µs	DO-214AC	1d	2j	Fag
R8	-	MM5Z13H	Zener diode	12.4..14.1V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	6d	1a	Zow
R8	-	MM5Z13V	Zener diode	13V±5%, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	6d	1a	Eic
R8	-	PDZ4.7B	Zener diode	4.7V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
R9	-	FS1Q	Si-diode	Rectifier, 1200V, 1A, Vf<1.1V(1A), 4µs	DO-214AC	1d	2j	Fag
R9	-	PDZ5.1B	Zener diode	5.1V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RA	-	BA895	PIN-diode	UHF TV-sat, 50V, 50mA, Vf<1.1V(50mA), 0.22pF, <2GHz	SCD-80	6d	1u	Inf
RA	-	P4SMA6V8C	TVS	Vbr=6.45..7.14V, Vrwm=6.8V, 38.1A, 400W (1ms), Bidir.	DO-214AC	1ba	2k	Fag
RA	-	PDZ5.6B	Zener diode	5.6V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RA	-	RGF1A	Si-diode	Rectifier, 50V, 1A, Vf<1.3V(1A), 150..500ns	DO-214BA	1d	1k	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
RA	-	RS1A	Si-diode	Rectifier, 50V, 1A, Vf<1.3V(1A)	DO-214AC	1d	1k	Vs
RA	-	RS2A	Si-diode	Rectifier, 50V, 1.5A, Vf<1.3V(1.5A)	DO-214AA	1d	1k	Vs
RA	-	RS3A	Si-diode	Rectifier, 50V, 3A, Vf<1.3V(3A)	DO-214AB	1d	1k	Vs
RB	-	KDZ8.2B	Zener diode	8.2V±2.5%, 40mA, 1W	PMDU	7d	1s	Rhm
RB	-	P4SMA6V8CA	TVS	Vbr=6.45..7.14V, Vrwm=6.8V, 38.1A, 400W (1ms), Bidir.	DO-214AC	1ba	2k	Fag
RB	-	PDZ6.2B	Zener diode	6.2V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RB	-	RGF1B	Si-diode	Rectifier, 100V, 1A, Vf<1.3V(1A), 150..500ns	DO-214BA	1d	1k	Vs
RB	-	RS1B	Si-diode	Rectifier, 100V, 1A, Vf<1.3V(1A)	DO-214AC	1d	1k	Vs
RB	-	RS1PB	Si-diode	Rectifier, 100V, 1A, Vf<1.3V(1A)	DO-220AA	8d	1k	Vs
RB	-	RS2B	Si-diode	Rectifier, 100V, 1.5A, Vf<1.3V(1.5A)	DO-214AA	1d	1k	Vs
RB	-	RS3B	Si-diode	Rectifier, 100V, 3A, Vf<1.3V(3A)	DO-214AB	1d	1k	Vs
RC	-	MBR1020LL	Si-diode	SBR, 20V, 1A, Vf=0.45V(1A)	SOD-123FL	7d	1a	Pjt
RC	-	P4SMA7V5C	TVS	Vbr=7.13..7.88V, Vrwm=7.5V, 35.4A, 400W (1ms), Bidir.	DO-214AC	1ba	2k	Fag
RC	-	PDZ6.8B	Zener diode	6.8V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RD	-	BZT52C2V0WT	Zener diode	1.8..2.15V, Izt=5mA, 200mW	SOD-523	6d	1a	Ttr
RD	-	MM5Z2V0	Zener diode	2.0V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-523	6d	1a	Rfe
RD	-	MM5Z2V0H	Zener diode	1.8..2.15V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	6d	1a	Zow
RD	-	P4SMA7V5CA	TVS	Vbr=7.13..7.88V, Vrwm=7.5V, 35.4A, 400W (1ms), Bidir.	DO-214AC	1ba	2k	Fag
RD	-	P4SMAJ54	TVS	Vrwm=54V, 4.2A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RD	-	PDZ7.5B	Zener diode	7.5V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RD	-	RGF1D	Si-diode	Rectifier, 200V, 1A, Vf<1.3V(1A), 150..500ns	DO-214BA	1d	1k	Vs
RD	-	RS1D	Si-diode	Rectifier, 200V, 1A, Vf<1.3V(1A)	DO-214AC	1d	1k	Vs
RD	-	RS1PD	Si-diode	Rectifier, 200V, 1A, Vf<1.3V(1A)	DO-220AA	8d	1k	Vs
RD	-	RS2D	Si-diode	Rectifier, 200V, 1.5A, Vf<1.3V(1.5A)	DO-214AA	1d	1k	Vs
RD	-	RS3D	Si-diode	Rectifier, 200V, 3A, Vf<1.3V(3A)	DO-214AB	1d	1k	Vs
RD	-	SM4T18	TVS	Vrwm=18V, 16A, 400W(1ms)	SOD-6	1d	1q	Ste
RD	-	SMAJ54	TVS	Vrwm=54V, Vbr=60.0..73.3V, 4.2A, 400W(1ms)	DO-214AC	1d	1k	Vs
RD	-	TV04A540K-G	TVS	Vrwm=54.0V, Vbr=60.0..73.30V, Ipp=4.15A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RDD	-	SMLJ5.0	TVS	Vrwm=5.0V, Vbr=6.40..7.30V, Ipp=312.5A, 3000W(1ms)	DO-214AB	1d	1a	Mco
RDE	-	3.0SMCJ5.0A	TVS	Vbr=6.4..7.25V, Vrwm=5.0V, 9.2 326A, 3000W(1ms)	DO-214AB	1d	1g	Mde
RDE	-	SMDJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=326.1A, 3000W(1ms)	DO-214AB	1d	1b	Mde
RDE	-	SMDJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=326.1A, 3000W(1ms)	DO-214AB	1d	2s	Lif
RDE	-	SMLJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=326.0A, 3000W(1ms)	DO-214AB	1d	1a	Mco
RDEH	-	SMDJ5.0A-HRA	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, Ipp=326.1A, 3000W(1ms)	DO-214AB	1d	2s	Lif
RDF	-	SMLJ6.0	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, Ipp=263.2A, 3000W(1ms)	DO-214AB	1d	1a	Mco
RDG	-	3.0SMCJ6.0A	TVS	Vbr=6.67..7.67V, Vrwm=6.0V, 291.3A, 3000W(1ms)	DO-214AB	1d	1g	Mde
RDG	-	SMDJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=291.3A, 3000W(1ms)	DO-214AB	1d	2s	Lif
RDG	-	SMDJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=291.3A, 3000W(1ms)	DO-214AB	1d	1b	Mde
RDG	-	SMLJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=291.3A, 3000W(1ms)	DO-214AB	1d	1a	Mco
RDGH	-	SMDJ6.0A-HRA	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=291.3A, 3000W(1ms)	DO-214AB	1d	2s	Lif
RDH	-	SMLJ6.5	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, Ipp=243.9A, 3000W(1ms)	DO-214AB	1d	1a	Mco
RDJ	-	P4SMA120	TVS	Vbr=108..132V, Vrwm=97.2V, 2.4A, 400W(1ms)	DO-214AC	1d	1a	Tsc
RDK	-	3.0SMCJ6.5A	TVS	Vbr=7.22..8.30V, Vrwm=6.5V, 267.9A, 3000W(1ms)	DO-214AB	1d	1g	Mde
RDK	-	SMA120	TVS	Vbr=108..132V, Vrwm=97.2V, 2.31A, 400W(1ms)	DO-214AC	1d	1a	Lge
RDK	-	SMDJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=267.9A, 3000W(1ms)	DO-214AB	1d	2s	Lif
RDK	-	SMDJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=267.9A, 3000W(1ms)	DO-214AB	1d	1b	Mde
RDK	-	SMLJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=267.9A, 3000W(1ms)	DO-214AB	1d	1a	Mco
RDKH	-	SMDJ6.5A-HRA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, Ipp=267.9A, 3000W(1ms)	DO-214AB	1d	2s	Lif
RDM	-	SMA120C	TVS	Vbr=108..132V, Vrwm=97.2V, 2.31A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
RDP	-	SMAJ54C	TVS	Vrwm=54V, Vbr=60.0..73.3V, 4.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RE	-	1SMA12A	TVS	Vrwm=12V±5%, 20.1A, 400W (1ms)	403B-01	3d	2t	Ons
RE	-	BZT52C2V2WT	Zener diode	2.08..2.33V, Izt=5mA, 200mW	SOD-523	6d	1a	Ttr
RE	-	CD214A-T54A	TVS	Vrwm=54V, Irsm=4.6A, 400W(1ms)	DO-214AC	1d	1a	Brn
RE	-	MM5Z2V2	Zener diode	2.2V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-523	6d	1a	Rfe
RE	-	MM5Z2V2H	Zener diode	2.08..2.33V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	6d	1a	Zow
RE	-	P4SMA8V2C	TVS	Vbr=7.79..8.61V, Vrwm=8.2V, 33.1A, 400W (1ms), Bidir.	DO-214AC	1ba	2k	Fag
RE	-	P4SMAJ54A	TVS	Vrwm=54V, 4.6A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RE	-	PDZ8.2B	Zener diode	8.2V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RE	-	PMF54A	TVS	Vbr=60.0..66.3V, Vrwm=54V, Ipp=2.30A, 200W(1ms)	SOD-123FL	7d	1a	Shp
RE	-	SM4T18A	TVS	Vrwm=18V, 16A, 400W(1ms)	SOD-6	1d	1q	Ste
RE	-	SMA6L54A	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, 6.9A, 600W(1ms)	DO-221AC	7d	2s	Lif
RE	-	SMAJ54A	TVS	Vrwm=54V, Vbr=60.0..73.3V, 4.6A, 400W(1ms)	DO-214AC	1d	1k	Vs
RE	-	SMAJ54A	TVS	Vrwm=54V, Vbr=60.0..73.3V, 4.6A, 400W(1ms)	DO-214AC	1d	1m	Di
RE	-	SMF54A	TVS	Vrwm=54V, Vbr=60..66.3V, Ipp=2.3A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
RE	-	TV04A540J-G	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=4.59A, 400W(1ms)	DO-214AC	1d	2o	Cmc
REA	-	TPSMA6L54A	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=6.9A, 600W(1ms)	DO-221AC	1d	2s	Lif
REC	-	1SMA12CA	TVS	Vrwm=12V±5%, 20.1A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
REJ	-	P4SMA120A	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 400W(1ms)	DO-214AC	1d	1a	Tsc
REK	-	SMA120A	TVS	Vbr=114..126V, Vrwm=102V, 2.42A, 400W(1ms)	DO-214AC	1d	1a	Lge
REM	-	SMA120CA	TVS	Vbr=114..126V, Vrwm=102V, 2.42A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
REP	-	SMAJ54CA	TVS	Vrwm=54V, Vbr=60.0..66.3V, 4.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RF	-	KDZ27FV	Zener diode	25.10..28.90V, Izt=2mA, Zzt=150,Ω, 100mW	TFSC	7d	1a	Kec
RF	-	MAZD200	Zener diode	18.8..21.2V, Zzt=80Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
RF	-	P4SMA8V2CA	TVS	Vbr=7.79..8.61V, Vrwm=8.2V, 33.1A, 400W (1ms), Bidir.	DO-214AC	1ba	2k	Fag
RF	-	P4SMAJ58	TVS	Vrwm=58V, 3.9A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RF	-	PDZ9.1B	Zener diode	9.1V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RF	-	PZU5.6BA/DG	Zener diode	5.6V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RF	-	SMAJ58	TVS	Vrwm=58V, Vbr=64.4..78.7V, 4.3A, 400W(1ms)	DO-214AC	1d	1k	Vs
RF	-	TV04A580K-G	TVS	Vrwm=58.0V, Vbr=64.40..78.70V, Ipp=3.88A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RFJ	-	P4SMA130	TVS	Vbr=117..143V, Vrwm=105V, 2.2A, 400W(1ms)	DO-214AC	1d	1a	Tsc
RFK	-	SMA130	TVS	Vbr=117..143V, Vrwm=105V, 2.14A, 400W(1ms)	DO-214AC	1d	1a	Lge
RFM	-	SMA130C	TVS	Vbr=117..143V, Vrwm=105V, 2.14A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
RFP	-	SMAJ58C	TVS	Vrwm=58V, Vbr=64.4..78.7V, 3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RG	-	1SMA13A	TVS	Vrwm=13V±5%, 18.6A, 400W (1ms)	403B-01	3d	2t	Ons
RG	-	CD214A-T58A	TVS	Vrwm=58V, Irsm=4.3A, 400W(1ms)	DO-214AC	1d	1a	Brn
RG	-	P4SMA9V1C	TVS	Vbr=8.65..9.55V, Vrwm=8.1V, 29.9A, 400W (1ms), Bidir.	DO-214AC	1ba	2k	Fag
RG	-	P4SMAJ58A	TVS	Vrwm=58V, 4.3A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RG	-	PDZ10B	Zener diode	10V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RG	-	PMF58A	TVS	Vbr=64.4..71.2V, Vrwm=58V, Ipp=2.14A, 200W(1ms)	SOD-123FL	7d	1a	Shp
RG	-	PZU5.6B1A/DG	Zener diode	5.6V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RG	-	RGF1G	Si-diode	Rectifier, 400V, 1A, Vf<1.3V(1A), 150..500ns	DO-214BA	1d	1k	Vs
RG	-	RS1G	Si-diode	Rectifier, 400V, 1A, Vf<1.3V(1A)	DO-214AC	1d	1k	Vs
RG	-	RS1PG	Si-diode	Rectifier, 400V, 1A, Vf<1.3V(1A)	DO-220AA	8d	1k	Vs
RG	-	RS2G	Si-diode	Rectifier, 400V, 1.5A, Vf<1.3V(1.5A)	DO-214AA	1d	1k	Vs
RG	-	RS3G	Si-diode	Rectifier, 400V, 3A, Vf<1.3V(3A)	DO-214AB	1d	1k	Vs
RG	-	SMA6L58A	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, 6.5A, 600W(1ms)	DO-221AC	7d	2s	Lif
RG	-	SMAJ58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, 4.3A, 400W(1ms)	DO-214AC	1d	1k	Vs
RG	-	SMAJ58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, 4.3A, 400W(1ms)	DO-214AC	1d	1m	Di
RG	-	SMF58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, Ipp=2.1A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
RG	-	TV04A580J-G	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=4.27A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RGA	-	TPSMA6L58A	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=6.5A, 600W(1ms)	DO-221AC	1d	2s	Lif
RGC	-	1SMA13CA	TVS	Vrwm=13V±5%, 18.6A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
RGE	-	SMDJ54A	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=34.4A, 3000W(1ms)	DO-214AB	1d	1b	Mde
RGE	-	SMDJ54A	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=34.4A, 3000W(1ms)	DO-214AB	1d	2s	Lif
RGEH	-	SMDJ54A-HRA	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=34.4A, 3000W(1ms)	DO-214AB	1d	2s	Lif
RGG	-	MRS1504T3	Si-diode	Power rectifier, 400V, 1.5A, Vf=1V(1.5A)	403A	3d	1f	Mot
RGG	-	MURS1504	Si-diode	Rectifier, 400V, 1.5A, Vf<1.04V(1.5A)	DO-214AA	1d	1a	Ons
RGJ	-	P4SMA130A	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 400W(1ms)	DO-214AC	1d	1a	Tsc
RGK	-	SMA130A	TVS	Vbr=124..137V, Vrwm=111V, 2.23A, 400W(1ms)	DO-214AC	1d	1a	Lge
RGL	-	FRS1GL	Si-diode	Fast Rectifier, 400V, 800mA, Vf<1.3V(1A), 250ns	DO-219AA	7d	2n	Fag
RGM	-	SMA130CA	TVS	Vbr=124..137V, Vrwm=111V, 2.23A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
RGP	-	SMAJ58CA	TVS	Vrwm=58V, Vbr=64.4..71.2V, 4.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RH	-	P4SMA9V1CA	TVS	Vbr=8.65..9.55V, Vrwm=8.1V, 29.9A, 400W (1ms), Bidir.	DO-214AC	1ba	2k	Fag
RH	-	P4SMAJ60	TVS	Vrwm=60V, 3.7A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RH	-	PDZ11B	Zener diode	11V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RH	-	PZU5.6B2A/DG	Zener diode	5.6V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RH	-	SM4T22	TVS	Vrwm=22V, 13A, 400W(1ms)	SOD-6	1d	1q	Ste
RH	-	SMAJ60	TVS	Vrwm=60V, Vbr=66.7..81.5V, 3.7A, 400W(1ms)	DO-214AC	1d	1k	Vs
RH	-	TV04A600K-G	TVS	Vrwm=60.0V, Vbr=66.70..81.50V, Ipp=3.74A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RHJ	-	P4SMA150	TVS	Vbr=135..165V, Vrwm=121V, 2.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
RHK	-	SMA150	TVS	Vbr=135..165V, Vrwm=121V, 1.86A, 400W(1ms)	DO-214AC	1d	1a	Lge
RHM	-	SMA150C	TVS	Vbr=135..165V, Vrwm=121V, 1.86A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
RHP	-	SMAJ60C	TVS	Vrwm=60V, Vbr=66.7..81.5V, 3.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RI	-	P4SMA10C	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 27.6A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RI	-	PDZ12B	Zener diode	12V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RJ	-	P4SMA10CA	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 27.6A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RJ	-	RGF1J	Si-diode	Rectifier, 600V, 1A, Vf<1.3V(1A), 150..500ns	DO-214BA	1d	1k	Vs
RJ	-	RS1J	Si-diode	Rectifier, 600V, 1A, Vf<1.3V(1A)	DO-214AC	1d	1k	Vs
RJ	-	RS1PJ	Si-diode	Rectifier, 600V, 1A, Vf<1.3V(1A)	DO-220AA	8d	1k	Vs
RJ	-	RS2J	Si-diode	Rectifier, 600V, 1.5A, Vf<1.3V(1.5A)	DO-214AA	1d	1k	Vs
RJ	-	RS3J	Si-diode	Rectifier, 600V, 3A, Vf<1.3V(3A)	DO-214AB	1d	1k	Vs
RJL	-	FRS1JL	Si-diode	Fast Rectifier, 600V, 800mA, Vf<1.3V(1A), 250ns	DO-219AA	7d	2n	Fag
RK	-	1SMA14A	TVS	Vrwm=14V±5%, 17.2A, 400W (1ms),	403B-01	3d	2t	Ons
RK	-	CD214A-T60A	TVS	Vrwm=60V, Irsm=4.1A, 400W(1ms)	DO-214AC	1d	1a	Brn
RK	-	P4SMA11C	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 26.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RK	-	P4SMAJ60A	TVS	Vrwm=60V, 4.1A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RK	-	PDZ13B	Zener diode	13V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RK	-	PMF60A	TVS	Vbr=66.7..73.7V, Vrwm=60V, Ipp=2.07A, 200W(1ms)	SOD-123FL	7d	1a	Shp
RK	-	PZU5.6B3A/DG	Zener diode	5.6V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RK	-	RGF1K	Si-diode	Rectifier, 800V, 1A, Vf<1.3V(1A), 150..500ns	DO-214BA	1d	1k	Vs



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
RK	-	RS1K	Si-diode	Rectifier, 800V, 1A, Vf<1.3V(1A)	DO-214AC	1d	1k	Vs
RK	-	RS2K	Si-diode	Rectifier, 800V, 1.5A, Vf<1.3V(1.5A)	DO-214AA	1d	1k	Vs
RK	-	RS3K	Si-diode	Rectifier, 800V, 3A, Vf<1.3V(3A)	DO-214AB	1d	1k	Vs
RK	-	SM4T22A	TVS	Vrwm=22V, 13A, 400W(1ms)	SOD-6	1d	1q	Ste
RK	-	SMA6L60A	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, 6.2A, 600W(1ms)	DO-221AC	7d	2s	Lif
RK	-	SMAJ60A	TVS	Vrwm=60V, Vbr=66.7..73.7V, 4.1A, 400W(1ms)	DO-214AC	1d	1m	Di
RK	-	SMAJ60A	TVS	Vrwm=60V, Vbr=66.7..73.7V, 4.1A, 400W(1ms)	DO-214AC	1d	1k	Vs
RK	-	SMF60A	TVS	Vrwm=60V, Vbr=66.7..73.7V, Ipp=1.8A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
RK	-	TV04A600J-G	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=4.13A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RKA	-	TPSMA6L60A	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=6.2A, 600W(1ms)	DO-221AC	1d	2s	Lif
RKC	-	1SMA14CA	TVS	Vrwm=14V±5%, 17.2A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
RKJ	-	P4SMA150A	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 400W(1ms)	DO-214AC	1d	1a	Tsc
RKK	-	SMA150A	TVS	Vbr=143..158V, Vrwm=128V, 1.93A, 400W(1ms)	DO-214AC	1d	1a	Lge
RKM	-	SMA150CA	TVS	Vbr=143..158V, Vrwm=128V, 1.93A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
RKP	-	SMAJ60CA	TVS	Vrwm=60V, Vbr=66.7..73.7V, 4.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RL	-	MBR1020VL	Si-diode	SBR, 20V, 1A, Vf=0.34V(1A)	SOD-123FL	7d	1a	Pjt
RL	-	P4SMA11CA	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 26.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RL	-	P4SMAJ64	TVS	Vrwm=64V, 3.5A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RL	-	PDZ15B	Zener diode	15V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RL	-	PZU6.2BA/DG	Zener diode	6.2V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RL	-	SM4T24	TVS	Vrwm=24V, 12A, 400W(1ms)	SOD-6	1d	1q	Ste
RL	-	SMAJ64	TVS	Vrwm=64V, Vbr=71.1..86.4V, 3.5A, 400W(1ms)	DO-214AC	1d	1k	Vs
RL	-	TV04A640K-G	TVS	Vrwm=64.0V, Vbr=71.10..86.90V, Ipp=3.51A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RLJ	-	P4SMA160	TVS	Vbr=144..176V, Vrwm=130V, 1.8A, 400W(1ms)	DO-214AC	1d	1a	Tsc
RLK	-	SMA160	TVS	Vbr=144..176V, Vrwm=130V, 1.74A, 400W(1ms)	DO-214AC	1d	1a	Lge
RLM	-	SMA160C	TVS	Vbr=144..176V, Vrwm=130V, 1.74A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
RLP	-	SMAJ64C	TVS	Vrwm=64V, Vbr=71.1..86.4V, 3.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RM	-	1SMA15A	TVS	Vrwm=15V±5%, 16.4A, 400W (1ms)	403B-01	3d	2t	Ons
RM	-	CD214A-T64A	TVS	Vrwm=64V, Irsm=3.9A, 400W(1ms)	DO-214AC	1d	1a	Brn
RM	-	P4SMA12C	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RM	-	P4SMAJ64A	TVS	Vrwm=64V, 3.9A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RM	-	PDZ16B	Zener diode	16V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RM	-	PMF64A	TVS	Vbr=71.1..78.6V, Vrwm=64V, Ipp=1.94A, 200W(1ms)	SOD-123FL	7d	1a	Shp
RM	-	PZU6.2B1A/DG	Zener diode	6.2V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RM	-	RGF1M	Si-diode	Rectifier, 1000V, 1A, Vf<1.3V(1A), 150..500ns	DO-214BA	1d	1k	Vs
RM	-	SM4T24A	TVS	Vrwm=24V, 12A, 400W(1ms)	SOD-6	1d	1q	Ste
RM	-	SMA6L64A	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, 5.9A, 600W(1ms)	DO-221AC	7d	2s	Lif
RM	-	SMAJ64A	TVS	Vrwm=64V, Vbr=71.1..78.6V, 3.9A, 400W(1ms)	DO-214AC	1d	1k	Vs
RM	-	SMAJ64A	TVS	Vrwm=64V, Vbr=71.1..78.6V, 3.9A, 400W(1ms)	DO-214AC	1d	1m	Di
RM	-	SMF64A	TVS	Vrwm=64V, Vbr=71.1..78.6V, Ipp=1.7A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
RM	-	TV04A640J-G	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=3.88A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RM12	-	RM1200E	Si-diode	Rectifier, 1200V, 500mA, Vf<2V(500mA), 30pF	DO-214AA	1d	1a	Mco
RM15	-	RM1500E	Si-diode	Rectifier, 1500V, 500mA, Vf<2V(500mA), 30pF	DO-214AA	1d	1a	Mco
RM18	-	RM1800E	Si-diode	Rectifier, 1800V, 500mA, Vf<2V(500mA), 30pF	DO-214AA	1d	1a	Mco
RM20	-	RM2000E	Si-diode	Rectifier, 2000V, 500mA, Vf<2V(500mA), 30pF	DO-214AA	1d	1a	Mco
RMA	-	TPSMA6L64A	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=5.9A, 600W(1ms)	DO-221AC	1d	2s	Lif
RMC	-	1SMA15CA	TVS	Vrwm=15V±5%, 16.4A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
RMJ	-	P4SMA160A	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 400W(1ms)	DO-214AC	1d	1a	Tsc
RMK	-	SMA160A	TVS	Vbr=152..168V, Vrwm=136V, 1.83A, 400W(1ms)	DO-214AC	1d	1a	Lge
RML	-	FRS1ML	Si-diode	Fast Rectifier, 1000V, 800mA, Vf<1.3V(1A), 250ns	DO-219AA	7d	2n	Fag
RMM	-	SMA160CA	TVS	Vbr=152..168V, Vrwm=136V, 1.83A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
RMP	-	SMAJ64CA	TVS	Vrwm=64V, Vbr=71.1..78.6V, 3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RN	-	P4SMA12CA	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 25.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RN	-	P4SMAJ70	TVS	Vrwm=70V, 3.2A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RN	-	PDZ18B	Zener diode	18V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RN	-	PZU6.2B2A/DG	Zener diode	6.2V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RN	-	SM4T27	TVS	Vrwm=27V, 10.7A, 400W(1ms)	SOD-6	1d	1q	Ste
RN	-	SMAJ70	TVS	Vrwm=70V, Vbr=77.8..95.1V, 3.2A, 400W(1ms)	DO-214AC	1d	1k	Vs
RN	-	TV04A700K-G	TVS	Vrwm=70.0V, Vbr=77.80..95.10V, Ipp=3.20A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RNJ	-	P4SMA170	TVS	Vbr=153..187V, Vrwm=138V, 1.7A, 400W(1ms)	DO-214AC	1d	1a	Tsc
RNK	-	SMA170	TVS	Vbr=153..187V, Vrwm=138V, 1.64A, 400W(1ms)	DO-214AC	1d	1a	Lge
RNM	-	SMA170C	TVS	Vbr=153..187V, Vrwm=138V, 1.64A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
RNP	-	SMAJ70C	TVS	Vrwm=70V, Vbr=77.8..95.1V, 3.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RO	-	P4SMA13C	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RO	-	PDZ20B	Zener diode	20V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RP	-	1SMA16A	TVS	Vrwm=16V±5%, 15.4A, 400W (1ms)	403B-01	3d	2t	Ons
RP	-	CD214A-T70A	TVS	Vrwm=70V, Irsm=3.5A, 400W(1ms)	DO-214AC	1d	1a	Brn
RP	-	CMDZ8L2	Zener diode	7.790..8.610V, Izt=0.5mA, Zzt=60Ω, 250mW	SOD-323	5d	1a	Cen
RP	-	DDZ33	Zener diode	33V±10%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
RP	-	DDZ33S	Zener diode	33V±10%, Izt=5mA, 200mW	SOD-323	5d	1d	Di

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
RP	-	KDZ27FVY	Zener diode	26.19..27.53V, Izt=2mA, Zzt=150,Ω, 100mW	TFSC	7d	1a	Kec
RP	-	P4SMA13CA	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 23.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RP	-	P4SMAJ70A	TVS	Vrwm=70V, 3.5A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RP	-	PDZ22B	Zener diode	22V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RP	-	PMF70A	TVS	Vbr=77.8..86.0V, Vrwm=70V, Ipp=1.77A, 200W(1ms)	SOD-123FL	7d	1a	Shp
RP	-	PZU6.2B3A/DG	Zener diode	6.2V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RP	-	SM4T27A	TVS	Vrwm=27V, 10.7A, 400W(1ms)	SOD-6	1d	1q	Ste
RP	-	SMA6L70A	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, 5.3A, 600W(1ms)	DO-221AC	7d	2s	Lif
RP	-	SMAJ70A	TVS	Vrwm=70V, Vbr=77.8..86V, 3.5A, 400W(1ms)	DO-214AC	1d	1m	Di
RP	-	SMAJ70A	TVS	Vrwm=70V, Vbr=77.8..86V, 3.5A, 400W(1ms)	DO-214AC	1d	1k	Vs
RP	-	SMF70A	TVS	Vrwm=70V, Vbr=77.8..86V, Ipp=1.5A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
RP	-	TV04A700J-G	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=3.54A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RPA	-	TPSMA6L70A	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=5.3A, 600W(1ms)	DO-221AC	1d	2s	Lif
RPC	-	1SMA16CA	TVS	Vrwm=16V±5%, 15.4A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
RPJ	-	P4SMA170A	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 400W(1ms)	DO-214AC	1d	1a	Tsc
RPK	-	SMA170A	TVS	Vbr=162..179V, Vrwm=145V, 1.71A, 400W(1ms)	DO-214AC	1d	1a	Lge
RPM	-	SMA170CA	TVS	Vbr=162..179V, Vrwm=145V, 1.71A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
RPP	-	SMAJ70CA	TVS	Vrwm=70V, Vbr=77.8..86V, 3.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RQ	-	P4SMAJ75	TVS	Vrwm=75V, 3A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RQ	-	PDZ24B	Zener diode	24V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RQ	-	SM4T30	TVS	Vrwm=30V, 9.6A, 400W(1ms)	SOD-6	1d	1q	Ste
RQ	-	SMAJ75	TVS	Vrwm=75V, Vbr=83.3..102V, 3A, 400W(1ms)	DO-214AC	1d	1k	Vs
RQ	-	TV04A750K-G	TVS	Vrwm=75.0V, Vbr=83.30..102.0V, Ipp=2.99A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RQJ	-	P4SMA180	TVS	Vbr=162..198V, Vrwm=146V, 1.6A, 400W(1ms)	DO-214AC	1d	1a	Tsc
RQK	-	SMA180	TVS	Vbr=162..198V, Vrwm=146V, 1.55A, 400W(1ms)	DO-214AC	1d	1a	Lge
RQM	-	SMA180C	TVS	Vbr=162..198V, Vrwm=146V, 1.55A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
RQP	-	SMAJ75C	TVS	Vrwm=75V, Vbr=83.3..102V, 3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RR	-	1SMA17A	TVS	Vrwm=17V±5%, 14.5A, 400W (1ms)	403B-01	3d	2t	Ons
RR	-	CD214A-T75A	TVS	Vrwm=75V, Irsm=3.3A, 400W(1ms)	DO-214AC	1d	1a	Brn
RR	-	P4SMA15C	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RR	-	P4SMAJ75A	TVS	Vrwm=75V, 3.3A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RR	-	PMF75A	TVS	Vbr=83.3..92.1V, Vrwm=75V, Ipp=1.65A, 200W(1ms)	SOD-123FL	7d	1a	Shp
RR	-	PZU6.8BA/DG	Zener diode	6.8V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RR	-	SM4T30A	TVS	Vrwm=30V, 9.6A, 400W(1ms)	SOD-6	1d	1q	Ste
RR	-	SMA6L75A	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, 5.0A, 600W(1ms)	DO-221AC	7d	2s	Lif
RR	-	SMAJ75A	TVS	Vrwm=75V, Vbr=83.3..92.1V, 3.3A, 400W(1ms)	DO-214AC	1d	1k	Vs
RR	-	SMAJ75A	TVS	Vrwm=75V, Vbr=83.3..92.1V, 3.3A, 400W(1ms)	DO-214AC	1d	1m	Di
RR	-	SMF75A	TVS	Vrwm=75V, Vbr=83.3..92.1V, Ipp=1.4A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
RR	-	TV04A750J-G	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=3.31A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RRA	-	TPSMA6L75A	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=5.0A, 600W(1ms)	DO-221AC	1d	2s	Lif
RRC	-	1SMA17CA	TVS	Vrwm=17V±5%, 14.5A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
RRJ	-	P4SMA180A	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 400W(1ms)	DO-214AC	1d	1a	Tsc
RRK	-	SMA180A	TVS	Vbr=171..189V, Vrwm=154V, 1.63A, 400W(1ms)	DO-214AC	1d	1a	Lge
RRM	-	SMA180CA	TVS	Vbr=171..189V, Vrwm=154V, 1.63A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
RRP	-	SMAJ75CA	TVS	Vrwm=75V, Vbr=83.3..92.1V, 3.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RS	-	P4SMA15CA	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 20.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RS	-	P4SMAJ78	TVS	Vrwm=78V, 2.9A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RS	-	PDZ27B	Zener diode	27V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RS	-	PZU6.8B1A/DG	Zener diode	6.8V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RS	-	SM4T33	TVS	Vrwm=33V, 8.8A, 400W(1ms)	SOD-6	1d	1q	Ste
RS	-	SMAJ78	TVS	Vrwm=78V, Vbr=86.7..106V, 2.9A, 400W(1ms)	DO-214AC	1d	1k	Vs
RS	-	TV04A780K-G	TVS	Vrwm=78.0V, Vbr=86.70..106.0V, Ipp=2.88A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RS	-	TV04A800K-G	TVS	Vrwm=80.0V, Vbr=88.96..108.80V, Ipp=2.79A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RSD	-	RSFDL	Si-diode	Fast Rectifier, 200V, 500mA, Vf<1.3V(500mA), 150ns	DO-219AA	7d	2n	Fag
RSG	-	RSFGL	Si-diode	Fast Rectifier, 400V, 500mA, Vf<1.3V(500mA), 150ns	DO-219AA	7d	2n	Fag
RSJ	-	P4SMA200	TVS	Vbr=180..220V, Vrwm=162V, 1.5A, 400W(1ms)	DO-214AC	1d	1a	Tsc
RSJ	-	RSFJL	Si-diode	Fast Rectifier, 600V, 500mA, Vf<1.3V(500mA), 250ns	DO-219AA	7d	2n	Fag
RSK	-	RSFKL	Si-diode	Fast Rectifier, 800V, 500mA, Vf<1.3V(500mA), 500ns	DO-219AA	7d	2n	Fag
RSK	-	SMA200	TVS	Vbr=180..220V, Vrwm=162V, 1.39A, 400W(1ms)	DO-214AC	1d	1a	Lge
RSM	-	RSFML	Si-diode	Fast Rectifier, 1000V, 500mA, Vf<1.3V(500mA), 500ns	DO-219AA	7d	2n	Fag
RSM	-	SMA200C	TVS	Vbr=180..220V, Vrwm=162V, 1.39A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
RSP	-	SMAJ78C	TVS	Vrwm=78V, Vbr=86.7..106V, 2.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RT	-	1SMA18A	TVS	Vrwm=18V±5%, 13.7A, 400W (1ms)	403B-01	3d	2t	Ons
RT	-	CD214A-T78A	TVS	Vrwm=78V, Irsm=3.2A, 400W(1ms)	DO-214AC	1d	1a	Brn
RT	-	P4SMA16C	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RT	-	P4SMAJ78A	TVS	Vrwm=78V, 2.2A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RT	-	PDZ30B	Zener diode	30V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RT	-	PMF78A	TVS	Vbr=86.7..95.8V, Vrwm=78V, Ipp=1.59A, 200W(1ms)	SOD-123FL	7d	1a	Shp
RT	-	PZU6.8B2A/DG	Zener diode	6.8V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RT	-	SM4T33A	TVS	Vrwm=33V, 8.8A, 400W(1ms)	SOD-6	1d	1q	Ste

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
RT	-	SMA6L78A	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, 4.8A, 600W(1ms)	DO-221AC	7d	2s	Lif
RT	-	SMAJ78A	TVS	Vrwm=78V, Vbr=86.7..95.8V, 3.2A, 400W(1ms)	DO-214AC	1d	1k	Vs
RT	-	SMAJ78A	TVS	Vrwm=78V, Vbr=86.7..95.8V, 3.2A, 400W(1ms)	DO-214AC	1d	1m	Di
RT	-	SMF78A	TVS	Vrwm=78V, Vbr=86.7..95.8V, Ipp=1.4A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
RT	-	TV04A780J-G	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=3.17A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RT	-	TV04A800J-G	TVS	Vrwm=80.0V, Vbr=88.80..97.60V, Ipp=3.09A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RTA	-	TPSMA6L78A	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp= 4.8A, 600W(1ms)	DO-221AC	1d	2s	Lif
RTC	-	1SMA18CA	TVS	Vrwm=18V±5%, 13.7A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
RTJ	-	P4SMA200A	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 400W(1ms)	DO-214AC	1d	1a	Tsc
RTK	-	SMA200A	TVS	Vbr=190..210V, Vrwm=171V, 1.46A, 400W(1ms)	DO-214AC	1d	1a	Lge
RTM	-	SMA200CA	TVS	Vbr=190..210V, Vrwm=171V, 1.46A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lge
RTP	-	SMAJ78CA	TVS	Vrwm=78V, Vbr=86.7..95.8V, 3.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RU	-	MBR1040VL	Si-diode	SBR, 40V, 1A, Vf=0.36V(1A)	SOD-123FL	7d	1a	Pjt
RU	-	P4SMA16CA	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 19.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RU	-	P4SMAJ85	TVS	Vrwm=85V, 2.6A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RU	-	PDZ33B	Zener diode	33V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RU	-	PMF80A	TVS	Vbr=88.8..97.6V, Vrwm=80V, Ipp=1.55A, 200W(1ms)	SOD-123FL	7d	1a	Shp
RU	-	PZU6.8B3A/DG	Zener diode	6.8V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RU	-	SM4T36	TVS	Vrwm=36V, 8A, 400W(1ms)	SOD-6	1d	1q	Ste
RU	-	SMAJ85	TVS	Vrwm=85V, Vbr=94.4..115V, 2A, 400W(1ms)	DO-214AC	1d	1k	Vs
RU	-	TV04A850K-G	TVS	Vrwm=85.0V, Vbr=94.40..115.0V, Ipp=2.65A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RUP	-	SMAJ85C	TVS	Vrwm=85V, Vbr=94.4..115V, 2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RV	-	1SMA20A	TVS	Vrwm=20V±5%, 12.3A, 400W (1ms)	403B-01	3d	2t	Ons
RV	-	CD214A-T85A	TVS	Vrwm=85V, Irsm=2.9A, 400W(1ms)	DO-214AC	1d	1a	Brn
RV	-	P4SMA18C	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RV	-	P4SMAJ85A	TVS	Vrwm=85V, 2.9A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RV	-	PMF85A	TVS	Vbr=94.4..104V, Vrwm=85V, Ipp=1.46A, 200W(1ms)	SOD-123FL	7d	1a	Shp
RV	-	PZU7.5BA/DG	Zener diode	7.5V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RV	-	SM4T36A	TVS	Vrwm=36V, 8A, 400W(1ms)	SOD-6	1d	1q	Ste
RV	-	SMA6L85A	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, 4.4A, 600W(1ms)	DO-221AC	7d	2s	Lif
RV	-	SMAJ85A	TVS	Vrwm=85V, Vbr=94.4..104V, 2.2A, 400W(1ms)	DO-214AC	1d	1k	Vs
RV	-	SMAJ85A	TVS	Vrwm=85V, Vbr=94.4..104V, 2.2A, 400W(1ms)	DO-214AC	1d	1m	Di
RV	-	SMF85A	TVS	Vrwm=85V, Vbr=94.4..104 V, Ipp=1.3A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
RV	-	TV04A850J-G	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=2.92A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RVA	-	TPSMA6L85A	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=4.4A, 600W(1ms)	DO-221AC	1d	2s	Lif
RVC	-	1SMA20CA	TVS	Vrwm=20V±5%, 12.3A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
RVP	-	SMAJ85CA	TVS	Vrwm=85V, Vbr=94.4..104V, 2.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RW	-	P4SMA18CA	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 17.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RW	-	P4SMAJ90	TVS	Vrwm=90V, 2.5A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RW	-	PDZ36B	Zener diode	36V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Pjt
RW	-	PZU7.5B1A/DG	Zener diode	7.5V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RW	-	SM4T39	TVS	Vrwm=39V, 7.4A, 400W(1ms)	SOD-6	1d	1q	Ste
RW	-	SMAJ90	TVS	Vrwm=90V, Vbr=100..122V, 1.9A, 400W(1ms)	DO-214AC	1d	1k	Vs
RW	-	TV04A900K-G	TVS	Vrwm=90V, Vbr=100.0..122.0V, Ipp=2.50A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RWP	-	SMAJ90C	TVS	Vrwm=90V, Vbr=100..122V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RX	-	1SMA22A	TVS	Vrwm=22V±5%, 11.3A, 400W (1ms)	403B-01	3d	2t	Ons
RX	-	CD214A-T90A	TVS	Vrwm=90V, Irsm=2.7A, 400W(1ms)	DO-214AC	1d	1a	Brn
RX	-	P4SMA20C	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RX	-	P4SMAJ90A	TVS	Vrwm=90V, 2.7A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RX	-	PMF90A	TVS	Vbr=100..111V, Vrwm=90V, Ipp=1.37A, 200W(1ms)	SOD-123FL	7d	1a	Shp
RX	-	PZU7.5B2A/DG	Zener diode	7.5V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RX	-	SM4T39A	TVS	Vrwm=39V, 7.4A, 400W(1ms)	SOD-6	1d	1q	Ste
RX	-	SMAJ90A	TVS	Vrwm=90V, Vbr=100..111V, 2.1A, 400W(1ms)	DO-214AC	1d	1m	Di
RX	-	SMAJ90A	TVS	Vrwm=90V, Vbr=100..111V, 2.1A, 400W(1ms)	DO-214AC	1d	1k	Vs
RX	-	SMF90A	TVS	Vrwm=90V, Vbr=100..111V, Ipp=1.2A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
RX	-	TV04A900J-G	TVS	Vrwm=90V, Vbr=100.0..111.0V, Ipp=2.74A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RXC	-	1SMA22CA	TVS	Vrwm=22V±5%, 11.3A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
RXP	-	SMAJ90CA	TVS	Vrwm=90V, Vbr=100..111V, 2.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RY	-	KDZ8.2VVY	Zener diode	8.02..8.36V, Izt=5mA, Zzt=20Ω, 100mW	VSC	7d	1a	Kec
RY	-	P4SMA20CA	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 15.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RY	-	P4SMAJ100	TVS	Vrwm=100V, 2.2A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RY	-	PZU7.5B3A/DG	Zener diode	7.5V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RY	-	SMAJ100	TVS	Vrwm=100V, Vbr=111..136V, 1.7A, 400W(1ms)	DO-214AC	1d	1k	Vs
RY	-	TV04A101K-G	TVS	Vrwm=100.0V, Vbr=111.0..136.0V, Ipp=2.23A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RYP	-	SMAJ100C	TVS	Vrwm=100V, Vbr=111..136V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
RZ	-	1SMA24A	TVS	Vrwm=24V, 24V±5%, 10.3A, 400W (1ms)	403B-01	3d	2t	Ons
RZ	-	BZT52B24S	Zener diode	23.52..24.48V, Izt=5mA, Zzt=70Ω, 200mW	SOD-323FL	7d	1a	Tsc
RZ	-	CD214A-T100A	TVS	Vrwm=100V, Irsm=2.5A, 400W(1ms)	DO-214AC	1d	1a	Brn
RZ	-	MM3Z24VB	Zener diode	23.52..24.48V, Zzt=65Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
RZ	-	MM3Z24VBW	Zener diode	23.52..24.48V, Izt=5mA, Zzt=70Ω, 200mW	SOD-323FL	7d	1a	Tac

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
RZ	-	P4SMA22C	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
RZ	-	P4SMAJ100A	TVS	Vrwm=100V, 2.5A, 400W (1ms)	DO-214AC	1d	1a	Pjt
RZ	-	PMF100A	TVS	Vbr=111..123V, Vrwm=100V, Ipp=1.23A, 200W(1ms)	SOD-123FL	7d	1a	Shp
RZ	-	PZU8.2BA/DG	Zener diode	8.2V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
RZ	-	SMAJ100A	TVS	Vrwm=100V, Vbr=111..136V, 1.9A, 400W(1ms)	DO-214AC	1d	1k	Vs
RZ	-	SMAJ100A	TVS	Vrwm=100V, Vbr=111..136V, 1.9A, 400W(1ms)	DO-214AC	1d	1m	Di
RZ	-	SMF100A	TVS	Vrwm=100V, Vbr=111..123V, Ipp=1.1A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
RZ	-	TCMM3Z24VB	Zener diode	24V±2%, Izt=5mA, Zzt=65Ω, 200mW	SOD-323FL	7d	1a	Tac
RZ	-	TV04A101J-G	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=2.47A, 400W(1ms)	DO-214AC	1d	2o	Cmc
RZC	-	1SMA24CA	TVS	Vrwm=24V, 24V±5%, 10.3A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
RZP	-	SMAJ100CA	TVS	Vrwm=100V, Vbr=111..123V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
S	-	CDZ13B	Zener diode	13V±2.5%, Izt=20mA, 1W	VMN	7d	1s	Rhm
S	-	CH751S-40PT	Si-diode	SBD, 40V, 30mA, Vf<0.37V(2mA)	SOD-523	8d	1a	Chm
S	au	MMSZ5268BPT	Zener diode	82V±5%, Izt=1.5mA, Zzt=330Ω, 225mW	SOD-523	6d	1a	Chm
S	az	BA582	PIN-diode	TV, VTR, VHF-Band-Sw, 35V, 100mA, Vf<1V, Cd<1.1pF	SOD-123	5d	2	Sie
S	az	BA592	PIN-diode	VHF, TV-Band-Sw, 35V, 100mA, Vf<1V(100mA), 1.4pF, <120ns	SOD-323	5d	2	Inf
S	ba	BB515	C-diode	AM-tuning, 30V, 20mA, Ir<0.01μA, Cv=17.5/20pF	SOD-123	5d	2	Sie
S	ba	BB535	C-diode	UHF TV-tuning, 30V, 20mA, 2.1..18.7pF(28..1V)	SOD-323	5d	2	Inf
S	bb	BB619	C-diode	VHF-TV-tuning, 30V, 20mA, Ir<0.01μA, Cv=36/42pF	SOD-123	5d	2	Inf
S	bb	BB639	C-diode	VHF-TV-tuning, 30V, 20mA, Ir<0.01μA, Cv=36/42pF	SOD-323	5d	2	Inf
S	bc	BB640	C-diode	VHF-TV/VTR-tuning, Hyperband, 30V, 20mA, 62/76pF	SOD-323	5d	2	Inf
S.	au	MMSZ5268SPT	Zener diode	82V±5%, Izt=1.5mA, Zzt=330Ω, 225mW	SOD-523	6d	1a	Chm
S0	-	1PS76SB10	Si-diode	SBD, U-Speed, 40V, 200mA, <10pF	SOD-323	5d	1a	Phi
S0	-	MMPZ5249SPT	Zener diode	18.62..19.38V, Izt=5mA, Zzt=42Ω, 225mW	SOD-323	5d	1a	Chm
S010	-	SMAJ8.5	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, 25.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
S010	-	SMAJ8.5C	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, 25.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S010	-	STBS010	TVS	Vbr=9.44..11.5V, 31.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S010	-	STUS010	TVS	Vbr=9.44..11.5V, 31.4A, 500W(1ms)	DO-214AC	1d	1a	Eic
S011	-	SMAJ9.0	TVS	Vrwm=9.0V, Vbr=10.0..12.2V, 23.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
S011	-	SMAJ9.0C	TVS	Vrwm=9.0V, Vbr=10.0..12.2V, 23.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S011	-	STBS011	TVS	Vbr=10..12.2V, 29.5A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S011	-	STUS011	TVS	Vbr=10..12.2V, 29.5A, 500W(1ms)	DO-214AC	1d	1a	Eic
S012	-	SMAJ10	TVS	Vrwm=10V, Vbr=11.1..13.6V, 21.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
S012	-	SMAJ10C	TVS	Vrwm=10V, Vbr=11.1..13.6V, 21.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S012	-	STBS012	TVS	Vbr=11.1..13.6V, 26.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S012	-	STUS012	TVS	Vbr=11.1..13.6V, 26.6A, 500W(1ms)	DO-214AC	1d	1a	Eic
S013	-	SMAJ11	TVS	Vrwm=11V, Vbr=12.2..14.9V, 19.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
S013	-	SMAJ11C	TVS	Vrwm=11V, Vbr=12.2..14.9V, 19.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S013	-	STBS013	TVS	Vbr=12.2..14.9V, 24.9A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S013	-	STUS013	TVS	Vbr=12.2..14.9V, 24.9A, 500W(1ms)	DO-214AC	1d	1a	Eic
S014	-	SMAJ12	TVS	Vrwm=12V, Vbr=13.3..16.3V, 18.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
S014	-	SMAJ12C	TVS	Vrwm=12V, Vbr=13.3..16.3V, 18.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S014	-	STBS014	TVS	Vbr=13.3..16.3V, 22.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S014	-	STUS014	TVS	Vbr=13.3..16.3V, 22.7A, 500W(1ms)	DO-214AC	1d	1a	Eic
S015	-	SMAJ13	TVS	Vrwm=13V, Vbr=14.4..17.6V, 16.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
S015	-	SMAJ13C	TVS	Vrwm=13V, Vbr=14.4..17.6V, 16.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S015	-	STBS015	TVS	Vbr=14.4..17.6V, 21A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S015	-	STUS015	TVS	Vbr=14.4..17.6V, 21A, 500W(1ms)	DO-214AC	1d	1a	Eic
S016	-	SMAJ14	TVS	Vrwm=14V, Vbr=15.6..19.1V, 15.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
S016	-	SMAJ14C	TVS	Vrwm=14V, Vbr=15.6..19.1V, 15.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S016	-	STBS016	TVS	Vbr=15.6..19.1V, 19.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S016	-	STUS016	TVS	Vbr=15.6..19.1V, 19.4A, 500W(1ms)	DO-214AC	1d	1a	Eic
S018	-	SMAJ15	TVS	Vrwm=15V, Vbr=16.7..20.4V, 14.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
S018	-	SMAJ15C	TVS	Vrwm=15V, Vbr=16.7..20.4V, 14.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S018	-	STBS018	TVS	Vbr=16.7..20.4V, 18.8A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S018	-	STUS018	TVS	Vbr=16.7..20.4V, 18.8A, 500W(1ms)	DO-214AC	1d	1a	Eic
S019	-	SMAJ16	TVS	Vrwm=16V, Vbr=17.8..21.8V, 13.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
S019	-	SMAJ16C	TVS	Vrwm=16V, Vbr=17.8..21.8V, 13.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S019	-	STBS019	TVS	Vbr=17.8..21.8V, 17.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S019	-	STUS019	TVS	Vbr=17.8..21.8V, 17.6A, 500W(1ms)	DO-214AC	1d	1a	Eic
S020	-	SMAJ17	TVS	Vrwm=17V, Vbr=18.9..23.1V, 13.1A, 400W(1ms)	DO-214AC	1d	1a	Eic
S020	-	SMAJ17C	TVS	Vrwm=17V, Vbr=18.9..23.1V, 13.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S020	-	STBS020	TVS	Vbr=18.9..23.1V, 16.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S020	-	STUS020	TVS	Vbr=18.9..23.1V, 16.4A, 500W(1ms)	DO-214AC	1d	1a	Eic
S021	-	SMAJ18	TVS	Vrwm=18V, Vbr=20.0..24.4V, 12.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
S021	-	SMAJ18C	TVS	Vrwm=18V, Vbr=20.0..24.4V, 12.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S021	-	STBS021	TVS	Vbr=20..24.4V, 15.5A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S021	-	STUS021	TVS	Vbr=20..24.4V, 15.5A, 500W(1ms)	DO-214AC	1d	1a	Eic
S023	-	SMAJ20	TVS	Vrwm=20V, Vbr=22.2..27.1V, 11.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
S023	-	SMAJ20C	TVS	Vrwm=20V, Vbr=22.2..27.1V, 11.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
S023	-	STBS023	TVS	Vbr=22.2..27.1V, 13.9A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S023	-	STUS023	TVS	Vbr=22.2..27.1V, 13.9A, 500W(1ms)	DO-214AC	1d	1a	Eic
S026	-	SMAJ22	TVS	Vrwm=22V, Vbr=24.4..29.8V, 10.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
S026	-	SMAJ22C	TVS	Vrwm=22V, Vbr=24.4..29.8V, 10.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S026	-	STBS026	TVS	Vbr=24.4..29.8V, 12.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S026	-	STUS026	TVS	Vbr=24.4..29.8V, 12.7A, 500W(1ms)	DO-214AC	1d	1a	Eic
S028	-	SMAJ24	TVS	Vrwm=24V, Vbr=26.7..32.6V, 9.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
S028	-	SMAJ24C	TVS	Vrwm=24V, Vbr=26.7..32.6V, 9.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S028	-	STBS028	TVS	Vbr=26.7..32.6V, 11.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S028	-	STUS028	TVS	Vbr=26.7..32.6V, 11.6A, 500W(1ms)	DO-214AC	1d	1a	Eic
S030	-	SMAJ26	TVS	Vrwm=26V, Vbr=28.9..35.3V, 8.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
S030	-	SMAJ26C	TVS	Vrwm=26V, Vbr=28.9..35.3V, 8.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S030	-	STBS030	TVS	Vbr=28.9..35.3V, 10.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S030	-	STUS030	TVS	Vbr=28.9..35.3V, 10.7A, 500W(1ms)	DO-214AC	1d	1a	Eic
S033	-	SMAJ28	TVS	Vrwm=28V, Vbr=31.1..38.0V, 8.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
S033	-	SMAJ28C	TVS	Vrwm=28V, Vbr=31.1..38.0V, 8.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S033	-	STBS033	TVS	Vbr=31.1..38V, 9.9A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S033	-	STUS033	TVS	Vbr=31.1..38V, 9.9A, 500W(1ms)	DO-214AC	1d	1a	Eic
S035	-	SMAJ30	TVS	Vrwm=30V, Vbr=33.3..40.7V, 7.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
S035	-	SMAJ30C	TVS	Vrwm=30V, Vbr=33.3..40.7V, 7.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S035	-	STBS035	TVS	Vbr=33.3..40.7V, 9.3A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S035	-	STUS035	TVS	Vbr=33.3..40.7V, 9.3A, 500W(1ms)	DO-214AC	1d	1a	Eic
S039	-	SMAJ33	TVS	Vrwm=33V, Vbr=36.7..44.9V, 6.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
S039	-	SMAJ33C	TVS	Vrwm=33V, Vbr=36.7..44.9V, 6.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S039	-	STBS039	TVS	Vbr=36.7..44.9V, 8.5A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S039	-	STUS039	TVS	Vbr=36.7..44.9V, 8.5A, 500W(1ms)	DO-214AC	1d	1a	Eic
S042	-	SMAJ36	TVS	Vrwm=36V, Vbr=40.0..48.9V, 6.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
S042	-	SMAJ36C	TVS	Vrwm=36V, Vbr=40.0..48.9V, 6.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S042	-	STBS042	TVS	Vbr=40..48.9V, 7.8A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S042	-	STUS042	TVS	Vbr=40..48.9V, 7.8A, 500W(1ms)	DO-214AC	1d	1a	Eic
S047	-	SMAJ40	TVS	Vrwm=40V, Vbr=44.4..54.3V, 5.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
S047	-	SMAJ40C	TVS	Vrwm=40V, Vbr=44.4..54.3V, 5.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S047	-	STBS047	TVS	Vbr=44.4..54.3V, 7A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S047	-	STUS047	TVS	Vbr=44.4..54.3V, 7A, 500W(1ms)	DO-214AC	1d	1a	Eic
S050	-	SMAJ43	TVS	Vrwm=43V, Vbr=47.8..58.4V, 5.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
S050	-	SMAJ43C	TVS	Vrwm=43V, Vbr=47.8..58.4V, 5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S050	-	STBS050	TVS	Vbr=47.8..58.4V, 6.5A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S050	-	STUS050	TVS	Vbr=47.8..58.4V, 6.5A, 500W(1ms)	DO-214AC	1d	1a	Eic
S053	-	SMAJ45	TVS	Vrwm=45V, Vbr=50.0..61.1V, 5.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
S053	-	SMAJ45C	TVS	Vrwm=45V, Vbr=50.0..61.1V, 5.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S053	-	STBS053	TVS	Vbr=50..61.1V, 6.2A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S053	-	STUS053	TVS	Vbr=50..61.1V, 6.2A, 500W(1ms)	DO-214AC	1d	1a	Eic
S056	-	SMAJ48	TVS	Vrwm=48V, Vbr=53.3..65.1V, 4.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
S056	-	SMAJ48C	TVS	Vrwm=48V, Vbr=53.3..65.1V, 4.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S056	-	STBS056	TVS	Vbr=53.3..65.1V, 5.8A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S056	-	STUS056	TVS	Vbr=53.3..65.1V, 5.8A, 500W(1ms)	DO-214AC	1d	1a	Eic
S060	-	SMAJ51	TVS	Vrwm=51V, Vbr=56.7..69.3V, 4.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
S060	-	SMAJ51C	TVS	Vrwm=51V, Vbr=56.7..69.3V, 4.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S060	-	STBS060	TVS	Vbr=56.7..69.3V, 5.5A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S060	-	STUS060	TVS	Vbr=56.7..69.3V, 5.5A, 500W(1ms)	DO-214AC	1d	1a	Eic
S063	-	SMAJ54	TVS	Vrwm=54V, Vbr=60.0..73.3V, 4.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
S063	-	SMAJ54C	TVS	Vrwm=54V, Vbr=60.0..73.3V, 4.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S063	-	STBS063	TVS	Vbr=60..73.3V, 5.2A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S063	-	STUS063	TVS	Vbr=60..73.3V, 5.2A, 500W(1ms)	DO-214AC	1d	1a	Eic
S068	-	SMAJ58	TVS	Vrwm=58V, Vbr=64.4..78.7V, 3.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
S068	-	SMAJ58C	TVS	Vrwm=58V, Vbr=64.4..78.7V, 3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S068	-	STBS068	TVS	Vbr=64.4..78.7V, 4.9A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S068	-	STUS068	TVS	Vbr=64.4..78.7V, 4.9A, 500W(1ms)	DO-214AC	1d	1a	Eic
S06H	-	SMAJ5.0	TVS	Vrwm=5.0V, Vbr=6.40..7.82V, 41.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
S06H	-	SMAJ5.0C	TVS	Vrwm=5.0V, Vbr=6.40..7.82V, 41.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S06H	-	STBS06H	TVS	Vbr=6.4..7.3V, 52A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S06H	-	STUS06H	TVS	Vbr=6.4..7.3V, 52A, 500W(1ms)	DO-214AC	1d	1a	Eic
S071	-	SMAJ60	TVS	Vrwm=60V, Vbr=66.7..81.5V, 3.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
S071	-	SMAJ60C	TVS	Vrwm=60V, Vbr=66.7..81.5V, 3.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S071	-	STBS071	TVS	Vbr=66.7..81.5V, 4.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S071	-	STUS071	TVS	Vbr=66.7..81.5V, 4.7A, 500W(1ms)	DO-214AC	1d	1a	Eic
S075	-	SMAJ64	TVS	Vrwm=64V, Vbr=71.1..86.4V, 3.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
S075	-	SMAJ64C	TVS	Vrwm=64V, Vbr=71.1..86.4V, 3.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S075	-	STBS075	TVS	Vbr=71.1..86.9V, 4.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S075	-	STUS075	TVS	Vbr=71.1..86.9V, 4.4A, 500W(1ms)	DO-214AC	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
S07A	-	SMAJ6.0	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, 35.1A, 400W(1ms)	DO-214AC	1d	1a	Eic
S07A	-	SMAJ6.0C	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, 35.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S07A	-	STBS07A	TVS	Vbr=6.67..8.15V, 43.9A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S07A	-	STUS07A	TVS	Vbr=6.67..8.15V, 43.9A, 500W(1ms)	DO-214AC	1d	1a	Eic
S07G	-	SMAJ6.5	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, 32.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
S07G	-	SMAJ6.5C	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, 32.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S07G	-	STBS07G	TVS	Vbr=7.22..8.82V, 40.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S07G	-	STUS07G	TVS	Vbr=7.22..8.82V, 40.7A, 500W(1ms)	DO-214AC	1d	1a	Eic
S082	-	SMAJ70	TVS	Vrwm=70V, Vbr=77.8..95.1V, 3.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
S082	-	SMAJ70C	TVS	Vrwm=70V, Vbr=77.8..95.1V, 3.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S082	-	STBS082	TVS	Vbr=77.8..95.1V, 4A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S082	-	STUS082	TVS	Vbr=77.8..95.1V, 4A, 500W(1ms)	DO-214AC	1d	1a	Eic
S088	-	SMAJ75	TVS	Vrwm=75V, Vbr=83.3..102V, 3A, 400W(1ms)	DO-214AC	1d	1a	Eic
S088	-	SMAJ75C	TVS	Vrwm=75V, Vbr=83.3..102V, 3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S088	-	STBS088	TVS	Vbr=83.3..102V, 3.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S088	-	STUS088	TVS	Vbr=83.3..102V, 3.7A, 500W(1ms)	DO-214AC	1d	1a	Eic
S08C	-	SMAJ7.0	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, 30.1A, 400W(1ms)	DO-214AC	1d	1a	Eic
S08C	-	SMAJ7.0C	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, 30.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S08C	-	STBS08C	TVS	Vbr=7.78..9.51V, 37.8A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S08C	-	STUS08C	TVS	Vbr=7.78..9.51V, 37.8A, 500W(1ms)	DO-214AC	1d	1a	Eic
S08I	-	SMAJ7.5	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, 28.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
S08I	-	SMAJ7.5C	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, 28.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S08I	-	STBS08I	TVS	Vbr=8.33..10.2V, 35A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S08I	-	STUS08I	TVS	Vbr=8.33..10.2V, 35A, 500W(1ms)	DO-214AC	1d	1a	Eic
S091	-	SMAJ78	TVS	Vrwm=78V, Vbr=86.7..106V, 2.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
S091	-	SMAJ78C	TVS	Vrwm=78V, Vbr=86.7..106V, 2.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S091	-	STBS091	TVS	Vbr=86.7..106V, 3.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S091	-	STUS091	TVS	Vbr=86.7..106V, 3.6A, 500W(1ms)	DO-214AC	1d	1a	Eic
S099	-	SMAJ85	TVS	Vrwm=85V, Vbr=94.4..115V, 2.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
S099	-	SMAJ85C	TVS	Vrwm=85V, Vbr=94.4..115V, 2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S099	-	STBS099	TVS	Vbr=94.4..115V, 3.3A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S099	-	STUS099	TVS	Vbr=94.4..115V, 3.3A, 500W(1ms)	DO-214AC	1d	1a	Eic
S09B	-	SMAJ8.0	TVS	Vrwm=8.0V, Vbr=8.89..10.9V, 26.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
S09B	-	SMAJ8.0C	TVS	Vrwm=8.0V, Vbr=8.89..10.9V, 26.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S09B	-	STBS09B	TVS	Vbr=8.89..10.9V, 33.3A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S09B	-	STUS09B	TVS	Vbr=8.89..10.9V, 33.3A, 500W(1ms)	DO-214AC	1d	1a	Eic
S0B1	-	SMAJ90	TVS	Vrwm=90V, Vbr=100..122V, 1.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
S0B1	-	SMAJ90C	TVS	Vrwm=90V, Vbr=100..122V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S0B1	-	STBS0B1	TVS	Vbr=100..122V, 3.1A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S0B1	-	STUS0B1	TVS	Vbr=100..122V, 3.1A, 500W(1ms)	DO-214AC	1d	1a	Eic
S0B2	-	SMAJ100	TVS	Vrwm=100V, Vbr=111..136V, 1.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
S0B2	-	SMAJ100C	TVS	Vrwm=100V, Vbr=111..136V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S0B2	-	STBS0B2	TVS	Vbr=111..136V, 2.8A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S0B2	-	STUS0B2	TVS	Vbr=111..136V, 2.8A, 500W(1ms)	DO-214AC	1d	1a	Eic
S0B3	-	SMAJ110	TVS	Vrwm=110V, Vbr=122..149V, 1.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
S0B3	-	SMAJ110C	TVS	Vrwm=110V, Vbr=122..149V, 1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S0B3	-	STBS0B3	TVS	Vbr=122..149V, 2.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S0B3	-	STUS0B3	TVS	Vbr=122..149V, 2.6A, 500W(1ms)	DO-214AC	1d	1a	Eic
S0B4	-	SMAJ120	TVS	Vrwm=120V, Vbr=133..163V, 1.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
S0B4	-	SMAJ120C	TVS	Vrwm=120V, Vbr=133..163V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S0B4	-	STBS0B4	TVS	Vbr=133..163V, 2.3A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S0B4	-	STUS0B4	TVS	Vbr=133..163V, 2.3A, 500W(1ms)	DO-214AC	1d	1a	Eic
S0B5	-	SMAJ130	TVS	Vrwm=130V, Vbr=144..176V, 1.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
S0B5	-	SMAJ130C	TVS	Vrwm=130V, Vbr=144..176V, 1.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S0B5	-	STBS0B5	TVS	Vbr=144..176V, 2.2A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S0B5	-	STUS0B5	TVS	Vbr=144..176V, 2.2A, 500W(1ms)	DO-214AC	1d	1a	Eic
S0B8	-	SMAJ150	TVS	Vrwm=150V, Vbr=167..204V, 1.1A, 400W(1ms)	DO-214AC	1d	1a	Eic
S0B8	-	SMAJ150C	TVS	Vrwm=150V, Vbr=167..204V, 1.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S0B8	-	STBS0B8	TVS	Vbr=167..204V, 1.9A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S0B8	-	STUS0B8	TVS	Vbr=167..204V, 1.9A, 500W(1ms)	DO-214AC	1d	1a	Eic
S0B9	-	SMAJ160	TVS	Vrwm=160V, Vbr=178..218V, 1A, 400W(1ms)	DO-214AC	1d	1a	Eic
S0B9	-	SMAJ160C	TVS	Vrwm=160V, Vbr=178..218V, 1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S0B9	-	STBS0B9	TVS	Vbr=178..218V, 1.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S0B9	-	STUS0B9	TVS	Vbr=178..218V, 1.7A, 500W(1ms)	DO-214AC	1d	1a	Eic
S0D0	-	SMAJ170	TVS	Vrwm=170V, Vbr=189..231V, 0.99A, 400W(1ms)	DO-214AC	1d	1a	Eic
S0D0	-	SMAJ170C	TVS	Vrwm=170V, Vbr=189..231V, 0.99A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S0D0	-	STBS0D0	TVS	Vbr=189..231V, 1.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S0D0	-	STUS0D0	TVS	Vbr=189..231V, 1.6A, 500W(1ms)	DO-214AC	1d	1a	Eic
S0D1	-	SMAJ188	TVS	Vrwm=188V, Vbr=209..231V, 0.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
S0D1	-	SMAJ188C	TVS	Vrwm=188V, Vbr=209..255V, 0.90A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
S1	-	1PS76SB21	Si-diode	SBR, U-Fast sw, 40V, 0.2A, Vf<0.55V(0.2A), <0.3ns	SOD-323	5d	1a	Phi
S1	-	1SS239	Si-diode	Schottky, VHF/UHF, 6V, 30mA	SOD-323	5d	1a	Tos
S1	-	BAV70BPT	Si-diode	Sw, 100V, 150mA, Vf<<1.25V(150mA), 4ns	SOD-123	5d	1a	Chm
S1	-	CMDSH-3	Si-diode	Sw, 30V, 100mA, 250mW, Vf<0.8V(100mA), 7pF	SOD-323	5d	1a	Cen
S1	-	FS2A	Si-diode	Rectifier, 50V, 1.5A, Vf<1.1V(1.5A), 4µs	DO-214AA	1d	2j	Fag
S1	-	SD101AW	Si-diode	Schottky, Fast Sw, 60V, 15mA, 2pF, 1ns	SOD-123	5d	1d	Di
S1	-	SD101AWS	Si-diode	Schottky, Fast Sw, 60V, 15mA, 2pF, 1ns	SOD-323	5d	1d	Di
S1	-	SFM11M	Si-diode	Super-fast Rec. Rect., 50V, 1A, Vf<0.95V(1A), 35ns	SOD-123H	10d	1a	Fre
S1	-	SFM12M	Si-diode	Super-fast Rec. Rect., 100V, 1A, Vf<0.95V(1A), 35ns	SOD-123H	10d	1a	Fre
S1	-	SFM13M	Si-diode	Super-fast Rec. Rect., 150V, 1A, Vf<0.95V(1A), 35ns	SOD-123H	10d	1a	Fre
S1	-	SFM14M	Si-diode	Super-fast Rec. Rect., 100V, 1A, Vf<1.25V(1A), 35ns	SOD-123H	10d	1a	Fre
S1	-	SFM15M	Si-diode	Super-fast Rec. Rect., 300V, 1A, Vf<1.25V(1A), 35ns	SOD-123H	10d	1a	Fre
S1	-	SFM16M	Si-diode	Super-fast Rec. Rect., 400V, 1A, Vf<1.85V(1A), 35ns	SOD-123H	10d	1a	Fre
S1	-	SFM18M	Si-diode	Super-fast Rec. Rect., 600V, 1A, Vf<1.85V(1A), 35ns	SOD-123H	10d	1a	Fre
S1	-	SFM19M	Si-diode	Super-fast Rec. Rect., 800V, 1A, Vf<1.85V(1A), 35ns	SOD-123H	10d	1a	Fre
S10	-	SS1H10	Si-diode	SBR, 100V, 1A, Vf<0.7V(2A)	DO-214AC	1d	1k	Vs
S10A	-	GF10A	Si-diode	Rectifier, 50V 1A, Vf<0.94V(1A)	DO-214AC	1d	1o	Zow
S10A	ab	GF10AH	Si-diode	Rectifier, 50V 1A, Vf<0.94V(1A), Halogen free	DO-214AC	1d	1o	Zow
S10B	-	GF10B	Si-diode	Rectifier, 100V 1A, Vf<0.94V(1A)	DO-214AC	1d	1o	Zow
S10B	ab	GF10BH	Si-diode	Rectifier, 100V 1A, Vf<0.94V(1A), Halogen free	DO-214AC	1d	1o	Zow
S10D	-	GF10D	Si-diode	Rectifier, 200V 1A, Vf<0.94V(1A)	DO-214AC	1d	1o	Zow
S10D	ab	GF10DH	Si-diode	Rectifier, 200V 1A, Vf<0.94V(1A), Halogen free	DO-214AC	1d	1o	Zow
S10DL	-	GF110DL	Si-diode	Rectifier, 200V 1A, Vf<0.91V(1A)	DO-214AC	1d	1o	Zow
S10DL	ab	GF110DLH	Si-diode	Rectifier, 200V 1A, Vf<0.91V(1A), Halogen free	DO-214AC	1d	1o	Zow
S10G	-	GF10G	Si-diode	Rectifier, 400V 1A, Vf<0.94V(1A)	DO-214AC	1d	1o	Zow
S10G	ab	GF10GH	Si-diode	Rectifier, 400V 1A, Vf<0.94V(1A), Halogen free	DO-214AC	1d	1o	Zow
S10GL	-	GF110GL	Si-diode	Rectifier, 400V 1A, Vf<0.91V(1A)	DO-214AC	1d	1o	Zow
S10GL	ab	GF110GLH	Si-diode	Rectifier, 400V 1A, Vf<0.91V(1A), Halogen free	DO-214AC	1d	1o	Zow
S10J	-	GF10J	Si-diode	Rectifier, 600V 1A, Vf<0.94V(1A)	DO-214AC	1d	1o	Zow
S10J	ab	GF10JH	Si-diode	Rectifier, 600V 1A, Vf<0.94V(1A), Halogen free	DO-214AC	1d	1o	Zow
S10JL	-	GF110JL	Si-diode	Rectifier, 600V 1A, Vf<0.91V(1A)	DO-214AC	1d	1o	Zow
S10JL	ab	GF110JLH	Si-diode	Rectifier, 600V 1A, Vf<0.91V(1A), Halogen free	DO-214AC	1d	1o	Zow
S10K	-	GF10K	Si-diode	Rectifier, 800V 1A, Vf<0.94V(1A)	DO-214AC	1d	1o	Zow
S10K	ab	GF10KH	Si-diode	Rectifier, 800V 1A, Vf<0.94V(1A), Halogen free	DO-214AC	1d	1o	Zow
S10KL	-	GF110KL	Si-diode	Rectifier, 800V 1A, Vf<0.92V(1A)	DO-214AC	1d	1o	Zow
S10KL	ab	GF110KLH	Si-diode	Rectifier, 800V 1A, Vf<0.92V(1A), Halogen free	DO-214AC	1d	1o	Zow
S10M	-	GF10M	Si-diode	Rectifier, 1000V 1A, Vf<0.94V(1A)	DO-214AC	1d	1o	Zow
S10M	ab	GF10MH	Si-diode	Rectifier, 1000V 1A, Vf<0.94V(1A), Halogen free	DO-214AC	1d	1o	Zow
S10ML	-	GF110ML	Si-diode	Rectifier, 1000V 1A, Vf<0.92V(1A)	DO-214AC	1d	1o	Zow
S10ML	ab	GF110MLH	Si-diode	Rectifier, 1000V 1A, Vf<0.92V(1A), Halogen free	DO-214AC	1d	1o	Zow
S10Q	-	GF10Q	Si-diode	Rectifier, 1200V 1A, Vf<0.98V(1A)	DO-214AC	1d	1o	Zow
S10Q	ab	GF10QH	Si-diode	Rectifier, 1200V 1A, Vf<0.98V(1A), Halogen free	DO-214AC	1d	1o	Zow
S10Y	-	GF10Y	Si-diode	Rectifier, 1600V 1A, Vf<0.98V(1A)	DO-214AC	1d	1o	Zow
S10Y	ab	GF10YH	Si-diode	Rectifier, 1600V 1A, Vf<0.98V(1A), Halogen free	DO-214AC	1d	1o	Zow
S11	-	STPS1H100A	Si-diode	SBR, 100V, 1A, Vf<0.62V(1A)	DO-214AC	1d	1a	Ste
S110	-	SSM110PT	Si-diode	SBR, 100V, 1A, Vf<0.8V(1A)	DO-214AC	1d	1a	Chm
S12L	-	SSM12LPT	Si-diode	SBR, 20V, 1A, Vf<0.38V(1A)	DO-214AC	1d	1a	Chm
S13L	-	SSM13LPT	Si-diode	SBR, 30V, 1A, Vf<0.38V(1A)	DO-214AC	1d	1a	Chm
S14	-	STPS140Z	Si-diode	SBR, 40V, 1A, Vf<0.55V(1A), 5ms	SOD-123	5d	1a	Ste
S14H	-	SSM14LHPT	Si-diode	SBR, 40V, 1A, Vf<0.35V(1A)	DO-214AC	1d	1a	Chm
S14L	-	SSM14LPT	Si-diode	SBR, 40V, 1A, Vf<0.38V(1A)	DO-214AC	1d	1a	Chm
S2	-	1PS76SB70	Si-diode	SBD, U-Speed, 70V, 70mA, Vf<1V(15mA), <2pF	SOD-323	5d	1a	Nxp
S2	-	1SS242	Si-diode	Schottky, VHF-Mix/Band-Sw, 5V, 30mA	SOD-123	5d	1a	Tos
S2	-	1SS315	C-diode	Schottky, UHF-Band Mix, 5V, 30mA, 0.6pF	SOD-323	5d	1a	Tos
S2	-	CMDSH2-3	Si-diode	Sw, 30V, 200mA, 250mW, Vf<0.55V(200mA), 15pF	SOD-323	5d	1a	Cen
S2	-	FS2B	Si-diode	Rectifier, 100V, 1.5A, Vf<1.1V(1.5A), 4µs	DO-214AA	1d	2j	Fag
S2	-	SD101BW	Si-diode	Schottky, Fast Sw, 50V, 15mA, 2.1pF, 1ns	SOD-123	5d	1d	Di
S2	-	SD101BWS	Si-diode	Schottky, Fast Sw, 50V, 15mA, 2.1pF, 1ns	SOD-323	5d	1d	Di
S2	-	SDB110Q	Si-diode	SBR, 30V, 30mA, 150mW, <10pF, <5ns	SOD-523	6d	1a	Auk
S2	-	SDB310Q	Si-diode	SBR, 30V, 200mA, 150mW, <10pF, <5ns	SOD-523	6d	1a	Auk
S2	-	SS12	Si-diode	SBR, 20V, 1A, Vf<0.5V(1A)	DO-214AC	1d	1k	Vs
S2	-	SS22	Si-diode	SBR, 20V, 2A, Vf<0.5V(2A)	DO-214AA	1d	1k	Vs
S2	-	SS32	Si-diode	SBR, 20V, 3A, Vf<0.5V(3A)	DO-214AB	1d	1k	Vs
S2	-	SSM5817SLGP	Si-diode	SBR, 20V, 500mA, Vf<0.385V(500mA)	SOD-123	5d	1a	Chm
S210	-	SSM210PT	Si-diode	SBR, 100V, 2A, Vf<0.8V(2A)	DO-214AC	1d	1a	Chm
S22L	-	SSM22LPT	Si-diode	SBR, 20V, 2A, Vf<0.4V(2A)	DO-214AC	1d	1a	Chm
S23	-	STPS3L25S	Si-diode	SBR, 25V, 3A, Vf<0.44V(3A)	DO-214AB	5d	1a	Ste
S23L	-	SSM23LPT	Si-diode	SBR, 30V, 2A, Vf<0.4V(2A)	DO-214AC	1d	1a	Chm
S24	-	SSA24	Si-diode	SBR, 40V, 2A, Vf<0.49V(2A)	DO-214AC	1d	1k	Vs
S24L	-	SSM24LPT	Si-diode	SBR, 40V, 2A, Vf<0.4V(2A)	DO-214AC	1d	1a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
S3	-	1SS357	Si-diode	Schottky, 40V, 100mA, Vf<0.6V(100mA), <25pF	SOD-323	5d	1a	Tos
S3	-	1SS369	Si-diode	Schottky, 40V, 100mA, Vf<0.6V(100mA), <25pF	SOD-323	5d	1a	Tos
S3	-	1SS388	Si-diode	Schottky, 45V, 100mA, Vf<0.6V(50mA)	SOD-523	6d	1a	Tos
S3	-	FS2D	Si-diode	Rectifier, 200V, 1.5A, Vf<1.1V(1.5A), 4µs	DO-214AA	1d	2j	Fag
S3	-	SD101CW	Si-diode	Schottky, Fast Sw, 40V, 15mA, 2.2pF, 1ns	SOD-123	5d	1d	Di
S3	-	SD101CWS	Si-diode	Schottky, Fast Sw, 40V, 15mA, 2.2pF, 1ns	SOD-323	5d	1d	Di
S3	-	SS13	Si-diode	SBR, 30V, 1A, Vf<0.5V(1A)	DO-214AC	1d	1k	Vs
S3	-	SS23	Si-diode	SBR, 30V, 2A, Vf<0.5V(2A)	DO-214AA	1d	1k	Vs
S3	-	SS33	Si-diode	SBR, 30V, 3A, Vf<0.5V(3A)	DO-214AB	1d	1k	Vs
S3	-	SSM5818SLGP	Si-diode	SBR, 30V, 500mA, Vf<0.43V(500mA)	SOD-123	5d	1a	Chm
S31	-	1SS357	Si-diode	Schottky, 40V, 100mA, Vf<0.6V(100mA), <25pF	SOD-323	5d	1a	Trs
S310	-	SSM310PT	Si-diode	SBR, 100V, 3A, Vf<0.85V(3A)	DO-214AC	1d	1a	Chm
S32L	-	SSM32LPT	Si-diode	SBR, 20V, 3A, Vf<0.4V(3A)	DO-214AC	1d	1a	Chm
S33L	-	SSM33LPT	Si-diode	SBR, 30V, 3A, Vf<0.4V(3A)	DO-214AC	1d	1a	Chm
S34	-	SSA34	Si-diode	SBR, 40V, 3A, Vf<0.49V(3A)	DO-214AC	1d	1k	Vs
S34H	-	SSM34LHPT	Si-diode	SBR, 40V, 3A, Vf<0.45V(3A)	DO-214AC	1d	1a	Chm
S34L	-	SSM34LPT	Si-diode	SBR, 40V, 3A, Vf<0.4V(3A)	DO-214AC	1d	1a	Chm
S3G	-	1SS355G-CB2	Si-diode	Sw, 90V, 100mA, Vf<1.2V(100mA), 4ns	SOD-323	5d	2m	Utc
S3L	-	1SS355L-CB2	Si-diode	Sw, 90V, 100mA, Vf<1.2V(100mA), 4ns	SOD-323	5d	2m	Utc
S4	-	1PS76SB40	Si-diode	SBD, Hi-Speed, 40V, 120mA, <5pF	SOD-323	5d	1a	Nxp
S4	-	1SS355	Si-diode	Sw, 90V, 150mA, Vf<1.2V(100mA), 4ns	SOD-323	7d	1a	Tac
S4	-	1SS367	Si-diode	Schottky, Sw, 15V, 100mA	SOD-123	5d	1a	Tos
S4	-	1SS373	Si-diode	Schottky, Sw, 15V, 100mA	SOD-323	5d	1a	Tos
S4	-	1SS389	Si-diode	Schottky, 40V, 100mA	SOD-523	6d	1a	Tos
S4	-	FS2G	Si-diode	Rectifier, 400V, 1.5A, Vf<1.1V(1.5A), 4µs	DO-214AA	1d	2j	Fag
S4	-	SD103AW	Si-diode	Schottky, Sw, 40V, 350mA, 400mW, 10ns, 28pF	SOD-123	5d	1d	Di
S4	-	SD103AWS	Si-diode	Schottky, Sw, 40V, 350mA, 200mW, 10ns, 28pF	SOD-323	5d	1d	Di
S4	-	SD103BW	Si-diode	Schottky, Sw, 30V, 350mA, 400mW, 10ns, 28pF	SOD-123	5d	1d	Di
S4	-	SD103BWS	Si-diode	Schottky, Sw, 30V, 350mA, 200mW, 10ns, 28pF	SOD-323	5d	1d	Di
S4	-	SD103CW	Si-diode	Schottky, Sw, 20V, 350mA, 400mW, 10ns, 28pF	SOD-123	5d	1d	Di
S4	-	SD103CWS	Si-diode	Schottky, Sw, 20V, 350mA, 200mW, 10ns, 28pF	SOD-323	5d	1d	Di
S4	-	SS14	Si-diode	SBR, 40V, 1A, Vf<0.5V(1A)	DO-214AC	1d	1k	Vs
S4	-	SS24	Si-diode	SBR, 40V, 2A, Vf<0.5V(2A)	DO-214AA	1d	1k	Vs
S4	-	SS34	Si-diode	SBR, 40V, 3A, Vf<0.5V(3A)	DO-214AB	1d	1k	Vs
S4	-	SSM5819SLGP	Si-diode	SBR, 40V, 500mA, Vf<0.51V(500mA)	SOD-123	5d	1a	Chm
S40	-	BAS40WS	Si-diode	SBD, 40V, 200mA, Vf<1V(40mA), 5pF	SOD-323	5d	1a	Pjt
S44	-	SSB44	Si-diode	SBR, 40V, 4A, Vf<0.49V(4A)	DO-214AA	1d	1k	Vs
S5	-	BZX584B27V	Zener diode	26.46..27.54V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523FL	7d	1a	Tac
S5	-	FS2J	Si-diode	Rectifier, 600V, 1.5A, Vf<1.1V(1.5A), 4µs	DO-214AA	1d	2j	Fag
S5	-	MM5Z27VB	Zener diode	26.46..27.54V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523FL	7d	1a	Tac
S5	-	PSM11PT	Si-diode	Rectifer, S-fast, 50V, 800mA	SOD-123S	7d	1a	Chm
S5	-	SD103BW	Si-diode	Schottky, Sw, 30V, 350mA, 400mW, 10ns, 28pF	SOD-123	5d	1d	Di
S5	-	SD103BWS	Si-diode	Schottky, Sw, 30V, 350mA, 200mW, 10ns, 28pF	SOD-323	5d	1d	Di
S5	-	SD103CW	Si-diode	Schottky, Sw, 20V, 350mA, 400mW, 10ns, 28pF	SOD-123	5d	1d	Di
S5	-	SD103CWS	Si-diode	Schottky, Sw, 20V, 350mA, 200mW, 10ns, 28pF	SOD-323	5d	1d	Di
S5	-	SS15	Si-diode	SBR, 50V, 1A, Vf<0.75V(1A)	DO-214AC	1d	1k	Vs
S5	-	SS25	Si-diode	SBR, 50V, 2A, Vf<0.7V(2A)	DO-214AA	1d	1k	Vs
S5	-	SS35	Si-diode	SBR, 50V, 3A, Vf<0.7V(3A)	DO-214AB	1d	1k	Vs
S510	-	SMAJ8.5A	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 27.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
S510	-	SMAJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 27.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S510	-	STBS510	TVS	Vbr=9.44..10.4V, 34.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S510	-	STUS510	TVS	Vbr=9.44..10.4V, 34.7A, 500W(1ms)	DO-214AC	1d	1a	Eic
S511	-	SMAJ9.0A	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, 26.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
S511	-	SMAJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, 26.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S511	-	STBS511	TVS	Vbr=10..11.1V, 32.5A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S511	-	STUS511	TVS	Vbr=10..11.1V, 32.5A, 500W(1ms)	DO-214AC	1d	1a	Eic
S512	-	SMAJ10A	TVS	Vrwm=10V, Vbr=11.1..12.3V, 23.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
S512	-	SMAJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.3V, 23.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S512	-	STBS512	TVS	Vbr=11.1..12.3V, 29.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S512	-	STUS512	TVS	Vbr=11.1..12.3V, 29.4A, 500W(1ms)	DO-214AC	1d	1a	Eic
S513	-	SMAJ11A	TVS	Vrwm=11V, Vbr=12.2..13.5V, 22A, 400W(1ms)	DO-214AC	1d	1a	Eic
S513	-	SMAJ11CA	TVS	Vrwm=11V, Vbr=12.2..13.5V, 22A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S513	-	STBS513	TVS	Vbr=12.2..13.5V, 27.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S513	-	STUS513	TVS	Vbr=12.2..13.5V, 27.4A, 500W(1ms)	DO-214AC	1d	1a	Eic
S514	-	SMAJ12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, 20.1A, 400W(1ms)	DO-214AC	1d	1a	Eic
S514	-	SMAJ12CA	TVS	Vrwm=12V, Vbr=13.3..14.7V, 20.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S514	-	STBS514	TVS	Vbr=13.3..14.7V, 25.1A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S514	-	STUS514	TVS	Vbr=13.3..14.7V, 25.1A, 500W(1ms)	DO-214AC	1d	1a	Eic
S515	-	SMAJ13A	TVS	Vrwm=13V, Vbr=14.4..15.9V, 18.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
S515	-	SMAJ13CA	TVS	Vrwm=13V, Vbr=14.4..15.9V, 18.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
S515	-	STBS515	TVS	Vbr=14.4..15.9V, 23.2A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S515	-	STUS515	TVS	Vbr=14.4..15.9V, 23.2A, 500W(1ms)	DO-214AC	1d	1a	Eic
S516	-	SMAJ14A	TVS	Vrwm=14V, Vbr=15.6..17.2V, 17.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
S516	-	SMAJ14CA	TVS	Vrwm=14V, Vbr=15.6..17.2V, 17.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S516	-	STBS516	TVS	Vbr=15.6..17.2V, 21.5A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S516	-	STUS516	TVS	Vbr=15.6..17.2V, 21.5A, 500W(1ms)	DO-214AC	1d	1a	Eic
S518	-	SMAJ15A	TVS	Vrwm=15V, Vbr=16.7..18.5V, 16.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
S518	-	SMAJ15CA	TVS	Vrwm=15V, Vbr=16.7..18.5V, 16.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S518	-	STBS518	TVS	Vbr=16.7..18.5V, 20.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S518	-	STUS518	TVS	Vbr=16.7..18.5V, 20.6A, 500W(1ms)	DO-214AC	1d	1a	Eic
S519	-	SMAJ16A	TVS	Vrwm=16V, Vbr=17.8..19.7V, 15.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
S519	-	SMAJ16CA	TVS	Vrwm=16V, Vbr=17.8..19.7V, 15.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S519	-	STBS519	TVS	Vbr=17.8..19.7V, 19.2A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S519	-	STUS519	TVS	Vbr=17.8..19.7V, 19.2A, 500W(1ms)	DO-214AC	1d	1a	Eic
S520	-	SMAJ17A	TVS	Vrwm=17V, Vbr=18.9..20.9V, 14.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
S520	-	SMAJ17CA	TVS	Vrwm=17V, Vbr=18.9..20.9V, 14.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S520	-	STBS520	TVS	Vbr=18.9..20.9V, 18.1A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S520	-	STUS520	TVS	Vbr=18.9..20.9V, 18.1A, 500W(1ms)	DO-214AC	1d	1a	Eic
S521	-	SMAJ18A	TVS	Vrwm=18V, Vbr=20.0..22.1V, 13.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
S521	-	SMAJ18CA	TVS	Vrwm=18V, Vbr=20.0..22.1V, 13.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S521	-	STBS521	TVS	Vbr=20..22.1V, 17.2A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S521	-	STUS521	TVS	Vbr=20..22.1V, 17.2A, 500W(1ms)	DO-214AC	1d	1a	Eic
S523	-	SMAJ20A	TVS	Vrwm=20V, Vbr=22.2..24.5V, 12.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
S523	-	SMAJ20CA	TVS	Vrwm=20V, Vbr=22.2..24.5V, 12.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S523	-	STBS523	TVS	Vbr=22.2..24.5V, 15.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S523	-	STUS523	TVS	Vbr=22.2..24.5V, 15.4A, 500W(1ms)	DO-214AC	1d	1a	Eic
S526	-	SMAJ22A	TVS	Vrwm=22V, Vbr=24.4..26.9V, 11.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
S526	-	SMAJ22CA	TVS	Vrwm=22V, Vbr=24.4..26.9V, 11.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S526	-	STBS526	TVS	Vbr=24.4..26.9V, 14.1A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S526	-	STUS526	TVS	Vbr=24.4..26.9V, 14.1A, 500W(1ms)	DO-214AC	1d	1a	Eic
S528	-	SMAJ24A	TVS	Vrwm=24V, Vbr=26.7..29.5V, 10.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
S528	-	SMAJ24CA	TVS	Vrwm=24V, Vbr=26.7..29.5V, 10.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S528	-	STBS528	TVS	Vbr=26.7..29.5V, 12.8A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S528	-	STUS528	TVS	Vbr=26.7..29.5V, 12.8A, 500W(1ms)	DO-214AC	1d	1a	Eic
S52H	-	SSM52LHPT	Si-diode	SBR, 20V, 5A, Vf<0.45V(5A)	DO-214AC	1d	1a	Chm
S52L	-	SSM52LPT	Si-diode	SBR, 20V, 5A, Vf<0.4V(5A)	DO-214AC	1d	1a	Chm
S530	-	SMAJ26A	TVS	Vrwm=26V, Vbr=28.9..31.9V, 9.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
S530	-	SMAJ26CA	TVS	Vrwm=26V, Vbr=28.9..31.9V, 9.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S530	-	STBS530	TVS	Vbr=28.9..31.9V, 11.9A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S530	-	STUS530	TVS	Vbr=28.9..31.9V, 11.9A, 500W(1ms)	DO-214AC	1d	1a	Eic
S533	-	SMAJ28A	TVS	Vrwm=28V, Vbr=31.1..34.4V, 8.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
S533	-	SMAJ28CA	TVS	Vrwm=28V, Vbr=31.1..34.4V, 8.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S533	-	STBS533	TVS	Vbr=31.1..34.4V, 11A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S533	-	STUS533	TVS	Vbr=31.1..34.4V, 11A, 500W(1ms)	DO-214AC	1d	1a	Eic
S535	-	SMAJ30A	TVS	Vrwm=30V, Vbr=33.3..36.8V, 8.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
S535	-	SMAJ30CA	TVS	Vrwm=30V, Vbr=33.3..36.8V, 8.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S535	-	STBS535	TVS	Vbr=33.3..36.8V, 10.3A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S535	-	STUS535	TVS	Vbr=33.3..36.8V, 10.3A, 500W(1ms)	DO-214AC	1d	1a	Eic
S539	-	SMAJ33A	TVS	Vrwm=33V, Vbr=36.7..40.6V, 7.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
S539	-	SMAJ33CA	TVS	Vrwm=33V, Vbr=36.7..40.6V, 7.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S539	-	STBS539	TVS	Vbr=36.7..40.6V, 9.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S539	-	STUS539	TVS	Vbr=36.7..40.6V, 9.4A, 500W(1ms)	DO-214AC	1d	1a	Eic
S54	-	SSC54	Si-diode	SBR, 40V, 5A, Vf<0.49V(5A)	DO-214AB	1d	1k	Vs
S542	-	SMAJ36A	TVS	Vrwm=36V, Vbr=40.0..44.2V, 6.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
S542	-	SMAJ36CA	TVS	Vrwm=36V, Vbr=40.0..44.2V, 6.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S542	-	STBS542	TVS	Vbr=40..44.2V, 8.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S542	-	STUS542	TVS	Vbr=40..44.2V, 8.6A, 500W(1ms)	DO-214AC	1d	1a	Eic
S547	-	SMAJ40A	TVS	Vrwm=40V, Vbr=44.4..49.1V, 6.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
S547	-	SMAJ40CA	TVS	Vrwm=40V, Vbr=44.4..49.1V, 6.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S547	-	STBS547	TVS	Vbr=44.4..49.1V, 7.8A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S547	-	STUS547	TVS	Vbr=44.4..49.1V, 7.8A, 500W(1ms)	DO-214AC	1d	1a	Eic
S54L	-	SSM54LGP	Si-diode	SBR, 40V, 5A, Vf<0.4V(5A)	DO-214AC	1d	1a	Chm
S550	-	SMAJ43A	TVS	Vrwm=43V, Vbr=47.8..52.8V, 5.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
S550	-	SMAJ43CA	TVS	Vrwm=43V, Vbr=47.8..52.8V, 5.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S550	-	STBS550	TVS	Vbr=47.8..52.8V, 7.2A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S550	-	STUS550	TVS	Vbr=47.8..52.8V, 7.2A, 500W(1ms)	DO-214AC	1d	1a	Eic
S553	-	SMAJ45A	TVS	Vrwm=45V, Vbr=50.0..55.3V, 5.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
S553	-	SMAJ45CA	TVS	Vrwm=45V, Vbr=50.0..55.3V, 5.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S553	-	STBS553	TVS	Vbr=50..55.3V, 6.9A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S553	-	STUS553	TVS	Vbr=50..55.3V, 6.9A, 500W(1ms)	DO-214AC	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
S556	-	SMAJ48A	TVS	Vrwm=48V, Vbr=53.3..58.9V, 5.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
S556	-	SMAJ48CA	TVS	Vrwm=48V, Vbr=53.3..58.9V, 5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S556	-	STBS556	TVS	Vbr=53.3..58.9V, 6.5A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S556	-	STUS556	TVS	Vbr=53.3..58.9V, 6.5A, 500W(1ms)	DO-214AC	1d	1a	Eic
S560	-	SMAJ51A	TVS	Vrwm=51V, Vbr=56.7..62.7V, 4.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
S560	-	SMAJ51CA	TVS	Vrwm=51V, Vbr=56.7..62.7V, 4.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S560	-	STBS560	TVS	Vbr=56.7..62.7V, 6.1A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S560	-	STUS560	TVS	Vbr=56.7..62.7V, 6.1A, 500W(1ms)	DO-214AC	1d	1a	Eic
S563	-	SMAJ54A	TVS	Vrwm=54V, Vbr=60.0..66.3V, 4.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
S563	-	SMAJ54CA	TVS	Vrwm=54V, Vbr=60.0..66.3V, 4.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S563	-	STBS563	TVS	Vbr=60..66.3V, 5.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S563	-	STUS563	TVS	Vbr=60..66.3V, 5.7A, 500W(1ms)	DO-214AC	1d	1a	Eic
S568	-	SMAJ58A	TVS	Vrwm=58V, Vbr=64.4..71.2V, 4.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
S568	-	SMAJ58CA	TVS	Vrwm=58V, Vbr=64.4..71.2V, 4.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S568	-	STBS568	TVS	Vbr=64.4..71.2V, 5.3A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S568	-	STUS568	TVS	Vbr=64.4..71.2V, 5.3A, 500W(1ms)	DO-214AC	1d	1a	Eic
S56H	-	SMAJ5.0A	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 43.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
S56H	-	SMAJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.25V, 43.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S56H	-	STBS56H	TVS	Vbr=6.4..7V, 54.3A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S56H	-	STUS56H	TVS	Vbr=6.4..7V, 54.3A, 500W(1ms)	DO-214AC	1d	1a	Eic
S571	-	SMAJ60A	TVS	Vrwm=60V, Vbr=66.7..73.7V, 4.1A, 400W(1ms)	DO-214AC	1d	1a	Eic
S571	-	SMAJ60CA	TVS	Vrwm=60V, Vbr=66.7..73.7V, 4.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S571	-	STBS571	TVS	Vbr=66.7..73.7V, 5.2A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S571	-	STUS571	TVS	Vbr=66.7..73.7V, 5.2A, 500W(1ms)	DO-214AC	1d	1a	Eic
S575	-	SMAJ64A	TVS	Vrwm=64V, Vbr=71.1..78.6V, 3.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
S575	-	SMAJ64CA	TVS	Vrwm=64V, Vbr=71.1..78.6V, 3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S575	-	STBS575	TVS	Vbr=71.1..78.6V, 4.9A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S575	-	STUS575	TVS	Vbr=71.1..78.6V, 4.9A, 500W(1ms)	DO-214AC	1d	1a	Eic
S57A	-	SMAJ6.0A	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 38.8A, 400W(1ms)	DO-214AC	1d	1a	Eic
S57A	-	SMAJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 38.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S57A	-	STBS57A	TVS	Vbr=6.67..7.37V, 48.5A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S57A	-	STUS57A	TVS	Vbr=6.67..7.37V, 48.5A, 500W(1ms)	DO-214AC	1d	1a	Eic
S57G	-	SMAJ6.5A	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 35.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
S57G	-	SMAJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 35.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S57G	-	STBS57G	TVS	Vbr=7.22..7.98V, 44.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S57G	-	STUS57G	TVS	Vbr=7.22..7.98V, 44.7A, 500W(1ms)	DO-214AC	1d	1a	Eic
S582	-	SMAJ70A	TVS	Vrwm=70V, Vbr=77.8..86V, 3.5A, 400W(1ms)	DO-214AC	1d	1a	Eic
S582	-	SMAJ70CA	TVS	Vrwm=70V, Vbr=77.8..86V, 3.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S582	-	STBS582	TVS	Vbr=77.8..86V, 4.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S582	-	STUS582	TVS	Vbr=77.8..86V, 4.4A, 500W(1ms)	DO-214AC	1d	1a	Eic
S588	-	SMAJ75A	TVS	Vrwm=75V, Vbr=83.3..92.1V, 3.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
S588	-	SMAJ75CA	TVS	Vrwm=75V, Vbr=83.3..92.1V, 3.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S588	-	STBS588	TVS	Vbr=83.3..92.1V, 4.1A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S588	-	STUS588	TVS	Vbr=83.3..92.1V, 4.1A, 500W(1ms)	DO-214AC	1d	1a	Eic
S58C	-	SMAJ7.0A	TVS	Vrwm=7.0V, Vbr=7.78..8.6V, 33.3A, 400W(1ms)	DO-214AC	1d	1a	Eic
S58C	-	SMAJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.6V, 33.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S58C	-	STBS58C	TVS	Vbr=7.78..8.6V, 41.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S58C	-	STUS58C	TVS	Vbr=7.78..8.6V, 41.7A, 500W(1ms)	DO-214AC	1d	1a	Eic
S58I	-	SMAJ7.5A	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 31.0A, 400W(1ms)	DO-214AC	1d	1a	Eic
S58I	-	SMAJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 31.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S58I	-	STBS58I	TVS	Vbr=8.33..9.21V, 38.8A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S58I	-	STUS58I	TVS	Vbr=8.33..9.21V, 38.8A, 500W(1ms)	DO-214AC	1d	1a	Eic
S591	-	SMAJ78A	TVS	Vrwm=78V, Vbr=86.7..95.8V, 3.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
S591	-	SMAJ78CA	TVS	Vrwm=78V, Vbr=86.7..95.8V, 3.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S591	-	STBS591	TVS	Vbr=86.7..95.8V, 4A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S591	-	STUS591	TVS	Vbr=86.7..95.8V, 4A, 500W(1ms)	DO-214AC	1d	1a	Eic
S599	-	SMAJ85A	TVS	Vrwm=85V, Vbr=94.4..104V, 2.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
S599	-	SMAJ85CA	TVS	Vrwm=85V, Vbr=94.4..104V, 2.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S599	-	STBS599	TVS	Vbr=94.4..104V, 3.6A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S599	-	STUS599	TVS	Vbr=94.4..104V, 3.6A, 500W(1ms)	DO-214AC	1d	1a	Eic
S59B	-	SMAJ8.0A	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 29.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
S59B	-	SMAJ8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 29.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S59B	-	STBS59B	TVS	Vbr=8.89..9.3V, 36.7A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S59B	-	STUS59B	TVS	Vbr=8.89..9.3V, 36.7A, 500W(1ms)	DO-214AC	1d	1a	Eic
S5B1	-	SMAJ90A	TVS	Vrwm=90V, Vbr=100..111V, 2.1A, 400W(1ms)	DO-214AC	1d	1a	Eic
S5B1	-	SMAJ90CA	TVS	Vrwm=90V, Vbr=100..111V, 2.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S5B1	-	STBS5B1	TVS	Vbr=100..111V, 3.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S5B1	-	STUS5B1	TVS	Vbr=100..111V, 3.4A, 500W(1ms)	DO-214AC	1d	1a	Eic
S5B2	-	SMAJ100A	TVS	Vrwm=100V, Vbr=111..123V, 1.9A, 400W(1ms)	DO-214AC	1d	1a	Eic
S5B2	-	SMAJ100CA	TVS	Vrwm=100V, Vbr=111..123V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
S5B2	-	STBS5B2	TVS	Vbr=111..123V, 3.1A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S5B2	-	STUS5B2	TVS	Vbr=111..123V, 3.1A, 500W(1ms)	DO-214AC	1d	1a	Eic
S5B3	-	SMAJ110A	TVS	Vrwm=110V, Vbr=122..135V, 1.7A, 400W(1ms)	DO-214AC	1d	1a	Eic
S5B3	-	SMAJ110CA	TVS	Vrwm=110V, 122..135V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S5B3	-	STBS5B3	TVS	Vbr=122..135V, 2.8A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S5B3	-	STUS5B3	TVS	Vbr=122..135V, 2.8A, 500W(1ms)	DO-214AC	1d	1a	Eic
S5B4	-	SMAJ120A	TVS	Vrwm=120V, Vbr=133..147V, 1.6A, 400W(1ms)	DO-214AC	1d	1a	Eic
S5B4	-	SMAJ120CA	TVS	Vrwm=120V, Vbr=133..147V, 1.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S5B4	-	STBS5B4	TVS	Vbr=133..147V, 2A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S5B4	-	STUS5B4	TVS	Vbr=133..147V, 2A, 500W(1ms)	DO-214AC	1d	1a	Eic
S5B5	-	SMAJ130A	TVS	Vrwm=130V, Vbr=144..159V, 1.4A, 400W(1ms)	DO-214AC	1d	1a	Eic
S5B5	-	SMAJ130CA	TVS	Vrwm=130V, Vbr=144..159V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S5B5	-	STBS5B5	TVS	Vbr=144..159V, 2.4A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S5B5	-	STUS5B5	TVS	Vbr=144..159V, 2.4A, 500W(1ms)	DO-214AC	1d	1a	Eic
S5B8	-	SMAJ150A	TVS	Vrwm=150V, Vbr=167..185V, 1.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
S5B8	-	SMAJ150CA	TVS	Vrwm=150V, Vbr=167..185V, 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S5B8	-	STBS5B8	TVS	Vbr=167..185V, 2.1A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S5B8	-	STUS5B8	TVS	Vbr=167..185V, 2.1A, 500W(1ms)	DO-214AC	1d	1a	Eic
S5B9	-	SMAJ160A	TVS	Vrwm=160V, Vbr=178..197V, 1.2A, 400W(1ms)	DO-214AC	1d	1a	Eic
S5B9	-	SMAJ160CA	TVS	Vrwm=160V, Vbr=178..197V, 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S5B9	-	STBS5B9	TVS	Vbr=178..197V, 1.9A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S5B9	-	STUS5B9	TVS	Vbr=178..197V, 1.9A, 500W(1ms)	DO-214AC	1d	1a	Eic
S5D0	-	SMAJ170A	TVS	Vrwm=170V, Vbr=189..209V, 1.09A, 400W(1ms)	DO-214AC	1d	1a	Eic
S5D0	-	SMAJ170CA	TVS	Vrwm=170V, Vbr=189..209V, 1.09A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S5D0	-	STBS5D0	TVS	Vbr=189..209V, 1.8A, 500W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S5D0	-	STUS5D0	TVS	Vbr=189..209V, 1.8A, 500W(1ms)	DO-214AC	1d	1a	Eic
S5D1	-	SMAJ188A	TVS	Vrwm=188V, Vbr=209..231V, 0.91A, 400W(1ms)	DO-214AC	1d	1a	Eic
S5D1	-	SMAJ188CA	TVS	Vrwm=188V, Vbr=209..231V, 0.91A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Eic
S5s	-	BBY52-03W	C-diode	VCO-tuning, 7V, 20mA, 1.4..2.2pF(4..1V)	SOD-323	5d	1a	Inf
S6	-	1PS76SB62	Si-diode	Schottky, Sw, 40V, 20mA, Vf<0.8V(2mA), <0.6pF	SOD-323	5d	1a	Phi
S6	-	D3FS6	Si-diode	SBR, 60V, 3A, Vf<0.58V(3A)	SOD-15	1d	1a	Shi
S6	-	FS2K	Si-diode	Rectifier, 800V, 1.5A, Vf<1.1V(1.5A), 4µs	DO-214AA	1d	2j	Fag
S6	-	PSM12PT	Si-diode	Rectifer, S-fast, 100V, 800mA	SOD-123S	7d	1a	Chm
S6	-	SD103AW	Si-diode	Schottky, Sw, 40V, 350mA, 400mW, 10ns, 28pF	SOD-123	5d	1d	Vs
S6	-	SD103AWS	Si-diode	Schottky, Sw, 40V, 350mA, 200mW, 10ns, 28pF	SOD-323	5d	1a	Vs
S6	-	SD103CW	Si-diode	Schottky, Sw, 20V, 350mA, 400mW, 10ns, 28pF	SOD-123	5d	1d	Di
S6	-	SD103CWS	Si-diode	Schottky, Sw, 20V, 350mA, 200mW, 10ns, 28pF	SOD-323	5d	1d	Di
S6	-	SS16	Si-diode	SBR, 60V, 1A, Vf<0.75V(1A)	DO-214AC	1d	1k	Vs
S6	-	SS26	Si-diode	SBR, 60V, 2A, Vf<0.7V(2A)	DO-214AA	1d	1k	Vs
S6	-	SS36	Si-diode	SBR, 60V, 3A, Vf<0.7V(3A)	DO-214AB	1d	1k	Vs
S7	-	1PS76SB17	Si-diode	Schottky, Sw, 4V, 30mA, Vf<0.6V(10mA), <0.65pF	SOD-323	5d	1a	Phi
S7	-	BAT42W	Si-diode	SBR, 30V, 200mA, Vf<1V(200mA), 4pF, 5ns	SOD-123	5d	1d	Di
S7	-	BAT42WS	Si-diode	SBR, 30V, 200mA, Vf<1V(200mA), 4pF, 5ns	SOD-323	5d	1d	Di
S7	-	FS2M	Si-diode	Rectifier, 1000V, 1.5A, Vf<1.1V(1.5A), 4µs	DO-214AA	1d	2j	Fag
S7	-	PSM13PT	Si-diode	Rectifer, S-fast, 200V, 800mA	SOD-123S	7d	1a	Chm
S7	-	SD103BW	Si-diode	Schottky, Sw, 30V, 350mA, 400mW, 10ns, 28pF	SOD-123	5d	1d	Vs
S7	-	SD103BWS	Si-diode	Schottky, Sw, 30V, 350mA, 200mW, 10ns, 28pF	SOD-323	5d	1a	Vs
S8	-	BAT43W	Si-diode	SBR, 30V, 200mA, Vf<1V(200mA), 4pF, 5ns	SOD-123	5d	1d	Di
S8	-	BAT43WS	Si-diode	SBR, 30V, 200mA, Vf<1V(200mA), 4pF, 5ns	SOD-323	5d	1d	Di
S8	-	BZT52C15WT	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	6d	1a	Ttr
S8	-	BZX84J-B10	Zener diode	10V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
S8	-	MM5Z15H	Zener diode	14.3..15.8V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	6d	1a	Zow
S8	-	MM5Z15V	Zener diode	15V±5%, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	6d	1a	Eic
S8	-	SD103CW	Si-diode	Schottky, Sw, 20V, 350mA, 400mW, 10ns, 28pF	SOD-123	5d	1d	Vs
S8	-	SD103CWS	Si-diode	Schottky, Sw, 20V, 350mA, 200mW, 10ns, 28pF	SOD-323	5d	1a	Vs
S8	-	SMD24SPT	Si-diode	SBR, 40V, 1.5A, Vf<0.65V(1.1A)	SOD-123	5d	1a	Chm
S9	-	1PS79SB62	Si-diode	SBD, U-Speed, 40V, 20mA, <0.6pF	SOD-523	6d	1a	Phi
S9	-	BAT46W	Si-diode	SBD, 100V, 150mA, Vf<1V(250mA), 6pF	SOD-123	5d	1d	Di
S9	-	BZX84J-B11	Zener diode	11V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
S9	-	SS1H9	Si-diode	SBR, 90V, 1A, Vf<0.7V(2A)	DO-214AC	1d	1k	Vs
S9	-	SS29	Si-diode	SBR, 90V, 2A, Vf<0.7V(2A)	DO-214AA	1d	1k	Vs
S9	-	SSM08150SPT	Si-diode	SBR, 150V, 800mA, Vf<0.85V(800mA)	SOD-123	5d	1a	Chm
S9G	-	1N5819L-CA2	Si-diode	SBR, 40V, 625mA, Vf<0.6V(1A), 50pF, Halogen free	SOD-123	5d	2m	Utc
S9L	-	1N5819L-CA2	Si-diode	SBR, 40V, 625mA, Vf<0.6V(1A), 50pF, Lead free	SOD-123	5d	2m	Utc
SA	-	1N5711W	Si-diode	Schottky, VHF/UHF-Dem, 70V, 15mA, <2pF	SOD-123	5d	1a	Di
SA	-	1N5711WS	Si-diode	Schottky, VHF/UHF-Dem, 70V, 15mA, <2pF	SOD-323	5d	1a	Di
SA	-	BZX84J-B12	Zener diode	12V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SA	-	CH157H-70PT	Si-diode	SBD, 70V, 15mA, Vf<1V(15mA), 1ns	SOD-323	5d	1a	Chm
SA	-	P4SMA22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 14.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SA	-	S1A	Si-diode	Rectifier, 50V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1k	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
SA	-	S2A	Si-diode	Rectifier, 50V, 1.5A, Vf<1.15V(1.5A)	DO-214AA	1d	1k	Vs
SA	-	S3A	Si-diode	Rectifier, 50V, 3A, Vf<1.15V(2.5A)	DO-214AB	1d	1k	Vs
SA	-	SD101AW	Si-diode	Schottky, Fast Sw, 60V, 30mA, 2pF, 1ns	SOD-123	5d	1a	Vs
SA	-	SD101AWS	Si-diode	Schottky, Fast Sw, 60V, 30mA, 2pF, 1ns	SOD-323	5d	1a	Vs
SA	-	TV04A141K-G	TVS	Vrwm=140V, Vbr=155.68..190.40V, Ipp=1.60A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SAD	-	TV05B5V0P-G	TVS	Vrwm=5.0V, Vbr=7.60V, Vcl=10.0V, Ipp=44.0A, 500W(1ms)	DO-214AA	1d	2o	Cmc
SAE	-	TV05B6V0P-G	TVS	Vrwm=6.0V, Vbr=7.90V, Vcl=11.2V, Ipp=41.0A, 500W(1ms)	DO-214AA	1d	2o	Cmc
SAF	-	TV05B7V0P-G	TVS	Vrwm=7.0V, Vbr=8.33V, Vcl=12.6V, Ipp=38.0A, 500W(1ms)	DO-214AA	1d	2o	Cmc
SAG	-	TV05B8V0P-G	TVS	Vrwm=8.0V, Vbr=8.89V, Vcl=13.4V, Ipp=36.0A, 500W(1ms)	DO-214AA	1d	2o	Cmc
SAH	-	TV05B8V5P-G	TVS	Vrwm=8.5V, Vbr=9.44V, Vcl=14.0V, Ipp=34.0A, 500W(1ms)	DO-214AA	1d	2o	Cmc
SAK	-	TV05B100P-G	TVS	Vrwm=10.0V, Vbr=11.10V, Vcl=16.3V, Ipp=29.0A, 500W(1ms)	DO-214AA	1d	2o	Cmc
SAL	-	TV05B120P-G	TVS	Vrwm=12V, Vbr=13.30V, Vcl=19.0V, Ipp=25.0A, 500W(1ms)	DO-214AA	1d	2o	Cmc
SAM	-	TV05B150P-G	TVS	Vrwm=15.0V, Vbr=16.70V, Vcl=23.6V, Ipp=20.0A, 500W(1ms)	DO-214AA	1d	2o	Cmc
SAN	-	TV05B180P-G	TVS	Vrwm=18.0V, Vbr=20.0V, Vcl=28.8V, Ipp=15.0A, 500W(1ms)	DO-214AA	1d	2o	Cmc
SAP	-	TV05B220P-G	TVS	Vrwm=22.0V, Vbr=24.40V, Vcl=35.4V, Ipp=14.0A, 500W(1ms)	DO-214AA	1d	2o	Cmc
SAQ	-	TV05B260P-G	TVS	Vrwm=26.0V, Vbr=28.90V, Vcl=42.3V, Ipp=11.0A, 500W(1ms)	DO-214AA	1d	2o	Cmc
SAR	-	TV05B300P-G	TVS	Vrwm=30.0V, Vbr=33.30V, Vcl=48.6V, Ipp=10.0A, 500W(1ms)	DO-214AA	1d	2o	Cmc
SAS	-	TV05B360P-G	TVS	Vrwm=36.0V, Vbr=40.0V, Vcl=60.0V, Ipp=8.60A, 500W(1ms)	DO-214AA	1d	2o	Cmc
SAT	-	TV05B450P-G	TVS	Vrwm=45.0V, Vbr=50.0V, Vcl=77.0V, Ipp=6.80A, 500W(1ms)	DO-214AA	1d	2o	Cmc
SAU	-	TV05B500P-G	TVS	Vrwm=50.0V, Vbr=55.50V, Vcl=88.0V, Ipp=5.80A, 500W(1ms)	DO-214AA	1d	2o	Cmc
SB	-	1N6263W	Si-diode	SBD, VHF/UHF-Dem, 60V, 15mA, Vf<1V(15mA), 2pF	SOD-123	5d	1d	Di
SB	-	BZX84J-B13	Zener diode	13V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SB	-	KDZ9.1B	Zener diode	9.1V±2.5%, 40mA, 1W	PMDU	7d	1s	Rhm
SB	-	MSE1PB	Si-diode	Rectifier, 100V, 1A, Vf<1.1V(3A)	MicroSMP	8d	1k	Vs
SB	-	P4SMA24C	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SB	-	S1B	Si-diode	Rectifier, 100V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1k	Vs
SB	-	S1PB	Si-diode	Rectifier, 100V, 1A, Vf<1.1V(1A)	DO-220AA	8d	1k	Vs
SB	-	S2B	Si-diode	Rectifier, 100V, 1.5A, Vf<1.15V(1.5A)	DO-214AA	1d	1k	Vs
SB	-	S3B	Si-diode	Rectifier, 100V, 3A, Vf<1.15V(2.5A)	DO-214AB	1d	1k	Vs
SB	-	SD101BW	Si-diode	Schottky, Fast Sw, 50V, 30mA, 2pF, 1ns	SOD-123	5d	1a	Vs
SB	-	SD101BWS	Si-diode	Schottky, Fast Sw, 50V, 30mA, 2pF, 1ns	SOD-323	5d	1a	Vs
SB	-	SMAJ550	TVS	Vrwm=550V, Vbr=540..560V, 0.3A, 300W(1ms)	DO-214AC	1d	1k	Vs
SB	-	TV04A141J-G	TVS	Vrwm=140V, Vbr=155.0..171.0V, Ipp=1.76A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SB12	-	SBM12PT	Si-diode	SBR, 20V, 1A, Vf<0.5V(1A)	DO-214AA	1d	1a	Chm
SB13	-	SBM13PT	Si-diode	SBR, 30V, 1A, Vf<0.5V(1A)	DO-214AA	1d	1a	Chm
SB14	-	SBM14PT	Si-diode	SBR, 40V, 1A, Vf<0.5V(1A)	DO-214AA	1d	1a	Chm
SB15	-	SBM15PT	Si-diode	SBR, 50V, 1A, Vf<0.7V(1A)	DO-214AA	1d	1a	Chm
SB16	-	SBM16PT	Si-diode	SBR, 60V, 1A, Vf<0.7V(1A)	DO-214AA	1d	1a	Chm
SB17	-	SBM17PT	Si-diode	SBR, 70V, 1A, Vf<0.75V(1A)	DO-214AA	1d	1a	Chm
SB18	-	SBM18PT	Si-diode	SBR, 80V, 1A, Vf<0.75V(1A)	DO-214AA	1d	1a	Chm
SB19	-	SBM19PT	Si-diode	SBR, 90V, 1A, Vf<0.8V(1A)	DO-214AA	1d	1a	Chm
SB22	-	SBM22PT	Si-diode	SBR, 20V, 2A, Vf<0.55V(2A)	DO-214AA	1d	1a	Chm
SB23	-	SBM23PT	Si-diode	SBR, 30V, 2A, Vf<0.55V(2A)	DO-214AA	1d	1a	Chm
SB24	-	SBM24PT	Si-diode	SBR, 40V, 2A, Vf<0.55V(2A)	DO-214AA	1d	1a	Chm
SB25	-	SBM25PT	Si-diode	SBR, 50V, 2A, Vf<0.7V(2A)	DO-214AA	1d	1a	Chm
SB26	-	SBM26PT	Si-diode	SBR, 60V, 2A, Vf<0.7V(2A)	DO-214AA	1d	1a	Chm
SB27	-	SBM27PT	Si-diode	SBR, 70V, 2A, Vf<0.75V(2A)	DO-214AA	1d	1a	Chm
SB28	-	SBM28PT	Si-diode	SBR, 80V, 2A, Vf<0.75V(2A)	DO-214AA	1d	1a	Chm
SB29	-	SBM29PT	Si-diode	SBR, 90V, 2A, Vf<0.8V(2A)	DO-214AA	1d	1a	Chm
SB32	-	SBM32PT	Si-diode	SBR, 20V, 3A, Vf<0.55V(3A)	DO-214AA	1d	1a	Chm
SB33	-	SBM33PT	Si-diode	SBR, 30V, 3A, Vf<0.55V(3A)	DO-214AA	1d	1a	Chm
SB34	-	SBM34PT	Si-diode	SBR, 40V, 3A, Vf<0.55V(3A)	DO-214AA	1d	1a	Chm
SB35	-	SBM35PT	Si-diode	SBR, 50V, 3A, Vf<0.75V(3A)	DO-214AA	1d	1a	Chm
SB36	-	SBM36PT	Si-diode	SBR, 60V, 3A, Vf<0.75V(3A)	DO-214AA	1d	1a	Chm
SB37	-	SBM37PT	Si-diode	SBR, 70V, 3A, Vf<0.75V(3A)	DO-214AA	1d	1a	Chm
SB38	-	SBM38PT	Si-diode	SBR, 80V, 3A, Vf<0.75V(3A)	DO-214AA	1d	1a	Chm
SB39	-	SBM39PT	Si-diode	SBR, 90V, 3A, Vf<0.8V(3A)	DO-214AA	1d	1a	Chm
SB52	-	SBM52PT	Si-diode	SBR, 20V, 5A, Vf<0.55V(5A)	DO-214AA	1d	1a	Chm
SB53	-	SBM53PT	Si-diode	SBR, 30V, 5A, Vf<0.55V(5A)	DO-214AA	1d	1a	Chm
SB54	-	SBM54PT	Si-diode	SBR, 40V, 5A, Vf<0.55V(5A)	DO-214AA	1d	1a	Chm
SB55	-	SBM55PT	Si-diode	SBR, 50V, 5A, Vf<0.7V(5A)	DO-214AA	1d	1a	Chm
SB56	-	SBM56PT	Si-diode	SBR, 60V, 5A, Vf<0.7V(5A)	DO-214AA	1d	1a	Chm
SB84	-	SBM84PT	Si-diode	SBR, 40V, 8A, Vf<0.55V(8A)	DO-214AB	1d	1a	Chm
SB86	-	SBM86PT	Si-diode	SBR, 60V, 8A, Vf<0.75V(8A)	DO-214AB	1d	1a	Chm
SC	-	BZX84J-B15	Zener diode	15V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SC	-	CH43H-30PT	Si-diode	SBD, 30V, 200mA, Vf<1V(200mA), 5ns	SOD-323	5d	1a	Chm
SC	-	P4SMA24CA	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 13.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SC	-	SD101CW	Si-diode	Schottky, Fast Sw, 40V, 30mA, 2pF, 1ns	SOD-123	5d	1a	Vs
SC	-	SD101CWS	Si-diode	Schottky, Fast Sw, 40V, 15mA, 2.2pF, 1ns	SOD-323	5d	1a	Di
SC32	-	SCM32PT	Si-diode	SBR, 20V, 3A, Vf<0.55V(3A)	DO-214AB	1d	1a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
SC33	-	SCM33PT	Si-diode	SBR, 30V, 3A, Vf<0.55V(3A)	DO-214AB	1d	1a	Chm
SC34	-	SCM34PT	Si-diode	SBR, 40V, 3A, Vf<0.55V(3A)	DO-214AB	1d	1a	Chm
SC35	-	SCM35PT	Si-diode	SBR, 50V, 3A, Vf<0.7V(3A)	DO-214AB	1d	1a	Chm
SC36	-	SCM36PT	Si-diode	SBR, 60V, 3A, Vf<0.7V(3A)	DO-214AB	1d	1a	Chm
SC37	-	SCM37PT	Si-diode	SBR, 70V, 3A, Vf<0.75V(3A)	DO-214AB	1d	1a	Chm
SC38	-	SCM38PT	Si-diode	SBR, 80V, 3A, Vf<0.75V(3A)	DO-214AB	1d	1a	Chm
SC39	-	SCM39PT	Si-diode	SBR, 90V, 3A, Vf<0.8V(3A)	DO-214AB	1d	1a	Chm
SC52	-	SCM52PT	Si-diode	SBR, 20V, 5A, Vf<0.55V(5A)	DO-214AB	1d	1a	Chm
SC53	-	SCM53PT	Si-diode	SBR, 30V, 5A, Vf<0.55V(5A)	DO-214AB	1d	1a	Chm
SC54	-	SCM54PT	Si-diode	SBR, 40V, 5A, Vf<0.55V(5A)	DO-214AB	1d	1a	Chm
SC55	-	SCM55PT	Si-diode	SBR, 50V, 5A, Vf<0.7V(5A)	DO-214AB	1d	1a	Chm
SC56	-	SCM56PT	Si-diode	SBR, 60V, 5A, Vf<0.7V(5A)	DO-214AB	1d	1a	Chm
SD	-	B0520LW	Si-diode	SBR, 20V, 500mA, Vf<0.33V500mA)	SOD-123	5d	1d	Di
SD	-	B0520WS	Si-diode	SBR, 20V, 500mA, Vf<0.33V(500mA)	SOD-323	5d	1a	Di
SD	-	BZX84J-B16	Zener diode	16V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SD	-	MSE1PD	Si-diode	Rectifier, 200V, 1A, Vf<1.1V(3A)	MicroSMP	8d	1k	Vs
SD	-	P4SMA27C	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SD	-	P4SMAJ110	TVS	Vrwm=110V, 2A, 400W (1ms)	DO-214AC	1d	1a	Pjt
SD	-	S1D	Si-diode	Rectifier, 200V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1k	Vs
SD	-	S1PD	Si-diode	Rectifier, 200V, 1A, Vf<1.1V(1A)	DO-220AA	8d	1k	Vs
SD	-	S2D	Si-diode	Rectifier, 200V, 1.5A, Vf<1.15V(1.5A)	DO-214AA	1d	1k	Vs
SD	-	S3D	Si-diode	Rectifier, 200V, 3A, Vf<1.15V(2.5A)	DO-214AB	1d	1k	Vs
SD	-	SMAJ110	TVS	Vrwm=110V, Vbr=122..149V, 1.5A, 400W(1ms)	DO-214AC	1d	1k	Vs
SD	-	TV04A111K-G	TVS	Vrwm=110.0V, Vbr=122.0..149.0V, Ipp=2.04A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SDP	-	SMAJ110C	TVS	Vrwm=110V, Vbr=122..135V, 1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
SE	-	1SMA26A	TVS	Vrwm=26V±5%, 9.5A, 400W (1ms)	403B-01	3d	2t	Ons
SE	-	B0530W	Si-diode	SBR, 30V, 500mA, Vf<0.45V(500mA)	SOD-123	5d	1d	Di
SE	-	B0530WS	Si-diode	SBR, 30V, 500mA, Vf<0.45V(500mA)	SOD-323	5d	1d	Di
SE	-	BZX84J-B18	Zener diode	18V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SE	-	CD214A-T110A	TVS	Vrwm=110V, Irsm=2.3A, 400W(1ms)	DO-214AC	1d	1a	Brn
SE	-	CH451H-30PT	Si-diode	SBD, 30V, 500mA, Vf<0.55V(500mA)	SOD-323	5d	1a	Chm
SE	-	P4SMA27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 11.2A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SE	-	P4SMAJ110A	TVS	Vrwm=110V, 2.3A, 400W (1ms)	DO-214AC	1d	1a	Pjt
SE	-	PMF110A	TVS	Vbr=122..135V, Vrwm=110V, Ipp=1.13A, 200W(1ms)	SOD-123FL	7d	1a	Shp
SE	-	SMAJ110A	TVS	Vrwm=110V, Vbr=122..135V, 1.7A, 400W(1ms)	DO-214AC	1d	1m	Di
SE	-	SMAJ110A	TVS	Vrwm=110V, Vbr=122..135V, 1.7A, 400W(1ms)	DO-214AC	1d	1k	Vs
SE	-	SMF110A	TVS	Vrwm=110V, Vbr=122..135V, Ipp=1A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
SE	-	TV04A111J-G	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=2.26A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SEC	-	1SMA26CA	TVS	Vrwm=26V±5%, 9.5A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
SEP	-	SMAJ110CA	TVS	Vrwm=110V, Vbr=122..135V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
SF	-	B0540W	Si-diode	SBR, 40V, 500mA, Vf<0.46V(500mA), 170pF	SOD-123	5d	1d	Di
SF	-	B0540WS	Si-diode	SBR, 40V, 500mA, Vf<0.48V(500mA), 120pF	SOD-323	5d	1d	Di
SF	-	BZX84J-B20	Zener diode	20V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SF	-	KDZ30FV	Zener diode	28.0..32.0V, Izt=2mA, Zzt=200Ω, 100mW	TFSC	7d	1a	Kec
SF	-	MAZD220	Zener diode	20.8..23.3V, Zzt=80Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
SF	-	P4SMA30C	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SF	-	P4SMAJ120	TVS	Vrwm=120V, 1.9A, 400W (1ms)	DO-214AC	1d	1a	Pjt
SF	-	SMAJ120	TVS	Vrwm=120V, Vbr=133..163V, 1.4A, 400W(1ms)	DO-214AC	1d	1k	Vs
SF	-	TV04A121K-G	TVS	Vrwm=120.0V, Vbr=133.0..163.0V, Ipp=1.87A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SFP	-	SMAJ120C	TVS	Vrwm=120V, Vbr=133..163V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
SG	-	1SMA28A	TVS	Vrwm=28V±5%, 8.8A, 400W (1ms)	403B-01	3d	2t	Ons
SG	-	BZX84J-B22	Zener diode	22V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SG	-	CD214A-T120A	TVS	Vrwm=120V, Irsm=2.0A, 400W(1ms)	DO-214AC	1d	1a	Brn
SG	-	MSE1PG	Si-diode	Rectifier, 400V, 1A, Vf<1.1V(3A)	MicroSMP	8d	1k	Vs
SG	-	P4SMA30CA	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 10.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SG	-	P4SMAJ120A	TVS	Vrwm=120V, 2A, 400W (1ms)	DO-214AC	1d	1a	Pjt
SG	-	PMF120A	TVS	Vbr=133..147V, Vrwm=120V, Ipp=1.04A, 200W(1ms)	SOD-123FL	7d	1a	Shp
SG	-	S1G	Si-diode	Rectifier, 400V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1k	Vs
SG	-	S1PG	Si-diode	Rectifier, 400V, 1A, Vf<1.1V(1A)	DO-220AA	8d	1k	Vs
SG	-	S2G	Si-diode	Rectifier, 400V, 1.5A, Vf<1.15V(1.5A)	DO-214AA	1d	1k	Vs
SG	-	S3G	Si-diode	Rectifier, 400V, 3A, Vf<1.15V(2.5A)	DO-214AB	1d	1k	Vs
SG	-	SMAJ120A	TVS	Vrwm=120V, Vbr=133..147V, 1.6A, 400W(1ms)	DO-214AC	1d	1m	Di
SG	-	SMAJ120A	TVS	Vrwm=120V, Vbr=133..147V, 1.6A, 400W(1ms)	DO-214AC	1d	1k	Vs
SG	-	SMF120A	TVS	Vrwm=120V, Vbr=133..147V, Ipp=0.9A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
SG	-	TV04A121J-G	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=2.07A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SGC	-	1SMA28CA	TVS	Vrwm=28V±5%, 8.8A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
SGL	-	FS1GL	Si-diode	Rectifier, 400V, 1A, Vf<1.1V(1A), 1.8µs	DO-219AA	7d	2n	Fag
SGP	-	SMAJ120CA	TVS	Vrwm=120V, Vbr=133..147V, 1.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
SH	-	BZX84J-B24	Zener diode	24V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SH	-	P4SMA33C	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
SH	-	P4SMAJ130	TVS	Vrwm=130V, 1.7A, 400W (1ms)	DO-214AC	1d	1a	Pjt
SH	-	SMAJ130	TVS	Vrwm=130V, Vbr=144..176V, 1.3A, 400W(1ms)	DO-214AC	1d	1k	Vs
SH	-	TV04A131K-G	TVS	Vrwm=130V, Vbr=144.0..176.0V, Ipp=1.73A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SHP	-	SMAJ130C	TVS	Vrwm=130V, Vbr=144..176V, 1.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
SI	-	P4SMA33CA	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 9.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SI	-	SDB310Q	Si-diode	SBR, 30V, 0.2A, 150mW, <5ns	SOD-523	6d	1a	Sme
SJ	-	1N6263W	Si-diode	SBD, VHF/UHF-Dem, 60V, 15mA, Vf<1V(15mA), 2pF	SOD-323FL	7d	1a	Sme
SJ	-	MSE1PJ	Si-diode	Rectifier, 600V, 1A, Vf<1.1V(3A)	MicroSMP	8d	1k	Vs
SJ	-	P4SMA36C	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SJ	-	S1J	Si-diode	Rectifier, 600V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1k	Vs
SJ	-	S1PJ	Si-diode	Rectifier, 600V, 1A, Vf<1.1V(1A)	DO-220AA	8d	1k	Vs
SJ	-	S2J	Si-diode	Rectifier, 600V, 1.5A, Vf<1.15V(1.5A)	DO-214AA	1d	1k	Vs
SJ	-	S3J	Si-diode	Rectifier, 600V, 3A, Vf<1.15V(2.5A)	DO-214AB	1d	1k	Vs
SJL	-	FS1JL	Si-diode	Rectifier, 600V, 1A, Vf<1.1V(1A), 1.8µs	DO-219AA	7d	2n	Fag
SK	-	1SMA30A	TVS	Vrwm=30V±5%, 8.3A, 400W (1ms)	403B-01	3d	2t	Ons
SK	-	BZX84J-B27	Zener diode	27V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SK	-	CD214A-T130A	TVS	Vrwm=130V, Irsm=1.9A, 400W(1ms)	DO-214AC	1d	1a	Brn
SK	-	P4SMA36CA	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 8.4A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SK	-	P4SMAJ130A	TVS	Vrwm=130V, 1.9A, 400W (1ms)	DO-214AC	1d	1a	Pjt
SK	-	PMF130A	TVS	Vbr=144..159V, Vrwm=130V, Ipp=0.96A, 200W(1ms)	SOD-123FL	7d	1a	Shp
SK	-	S1K	Si-diode	Rectifier, 800V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1k	Vs
SK	-	S1PK	Si-diode	Rectifier, 800V, 1A, Vf<1.1V(1A)	DO-220AA	8d	1k	Vs
SK	-	S2K	Si-diode	Rectifier, 800V, 1.5A, Vf<1.15V(1.5A)	DO-214AA	1d	1k	Vs
SK	-	S3K	Si-diode	Rectifier, 800V, 3A, Vf<1.15V(2.5A)	DO-214AB	1d	1k	Vs
SK	-	SD101AW	Si-diode	Schottky, Fast Sw, 60V, 15mA, 2pF, 1ns	SOD-123	5d	1d	Di
SK	-	SD101AWS	Si-diode	Schottky, Fast Sw, 60V, 15mA, 2pF, 1ns	SOD-323	5d	1d	Di
SK	-	SD101BW	Si-diode	Schottky, Fast Sw, 50V, 15mA, 2.1pF, 1ns	SOD-123	5d	1d	Di
SK	-	SD101BWS	Si-diode	Schottky, Fast Sw, 50V, 15mA, 2.1pF, 1ns	SOD-323	5d	1d	Di
SK	-	SD101CW	Si-diode	Schottky, Fast Sw, 40V, 15mA, 2.2pF, 1ns	SOD-123	5d	1d	Di
SK	-	SD101CWS	Si-diode	Schottky, Fast Sw, 40V, 15mA, 2.2pF, 1ns	SOD-323	5d	1d	Di
SK	-	SMAJ130A	TVS	Vrwm=130V, Vbr=144..159V, 1.4A, 400W(1ms)	DO-214AC	1d	1k	Vs
SK	-	SMF130A	TVS	Vrwm=130V, Vbr=144..159V, Ipp=0.8A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
SK	-	TV04A131J-G	TVS	Vrwm=130V, Vbr=144.0..159.0V, Ipp=1.91A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SK14	-	SSM14APT	Si-diode	SBR, 40V, 1A, Vf<0.5V(1A)	SMA-S	8d	1a	Chm
SK210	-	SSM210APT	Si-diode	SBR, 100V, 2A, Vf<0.8V(2A)	SMA-S	8d	1a	Chm
SK24	-	SSM24APT	Si-diode	SBR, 40V, 2A, Vf<0.5V(2A)	SMA-S	8d	1a	Chm
SK27	-	SSM27APT	Si-diode	SBR, 70V, 2A, Vf<0.75V(2A)	SMA-S	8d	1a	Chm
SK28	-	SSM28APT	Si-diode	SBR, 80V, 2A, Vf<0.75V(2A)	SMA-S	8d	1a	Chm
SK29	-	SSM29APT	Si-diode	SBR, 90V, 2A, Vf<0.8V(2A)	SMA-S	8d	1a	Chm
SK34	-	SSM34APT	Si-diode	SBR, 40V, 3A, Vf<0.5V(3A)	SMA-S	8d	1a	Chm
SKC	-	1SMA30CA	TVS	Vrwm=30V±5%, 8.3A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
SKE	-	SACB5.0	TVS	Vrwm=5.0V, Vbr=7.6V, 44A, 500W(1ms)	DO-214AA	1d	1a	Pic
SKG	-	SACB6.0	TVS	Vrwm=6.0V, Vbr=7.9V, 41A, 500W(1ms)	DO-214AA	1d	1a	Pic
SKM	-	SACB7.0	TVS	Vrwm=7.0V, Vbr=8.3V, 38A, 500W(1ms)	DO-214AA	1d	1a	Pic
SKP	-	SMAJ130CA	TVS	Vrwm=130V, Vbr=144..159V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
SKR	-	SACB8.0	TVS	Vrwm=8.0V, Vbr=8.9V, 36A, 500W(1ms)	DO-214AA	1d	1a	Pic
SKT	-	SACB8.5	TVS	Vrwm=8.5V, Vbr=9.44V, 34A, 500W(1ms)	DO-214AA	1d	1a	Pic
SKX	-	SACB10	TVS	Vrwm=10V, Vbr=11.1V, 29A, 500W(1ms)	DO-214AA	1d	1a	Pic
SL	-	1N5819HW	Si-diode	SBR, 40V, 1A, Vf<0.45V(1A), 50pF	SOD-123	5d	1d	Di
SL	-	BZX84J-B2V4	Zener diode	2.4V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SL	-	P4SMA39C	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SL	-	P4SMAJ150	TVS	Vrwm=150V, 1.5A, 400W (1ms)	DO-214AB	1d	1a	Pjt
SL	-	PMF140A	TVS	Vbr=155..171V, Vrwm=140V, Ipp=0.89A, 200W(1ms)	SOD-123FL	7d	1a	Shp
SL	-	SMAJ150	TVS	Vrwm=150V, Vbr=167..204V, 1.1A, 400W(1ms)	DO-214AC	1d	1k	Vs
SL	-	TV04A151K-G	TVS	Vrwm=150.0V, Vbr=167.0..204.0V, Ipp=1.49A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SL2	-	SL12	Si-diode	SBR, 20V, 1.5A, Vf<0.44V(1A)	DO-214AC	1d	1k	Vs
SL2	-	SL22	Si-diode	SBR, 20V, 2A, Vf<0.44V(2A)	DO-214AA	1d	1k	Vs
SL2	-	SL42	Si-diode	SBR, 20V, 4A, Vf<0.42V(4A)	DO-214AB	1d	1k	Vs
SL3	-	SL13	Si-diode	SBR, 30V, 1.5A, Vf<0.44V(1A)	DO-214AC	1d	1k	Vs
SL3	-	SL23	Si-diode	SBR, 30V, 2A, Vf<0.44V(2A)	DO-214AA	1d	1k	Vs
SL3	-	SL43	Si-diode	SBR, 30V, 4A, Vf<0.42V(4A)	DO-214AB	1d	1k	Vs
SL4	-	SL44	Si-diode	SBR, 40V, 4A, Vf<0.42V(4A)	DO-214AB	1d	1k	Vs
SLE	-	SACB12	TVS	Vrwm=12V, Vbr=13.3V, 25A, 500W(1ms)	DO-214AA	1d	1a	Pic
SLM	-	SACB15	TVS	Vrwm=15V, Vbr=16.7V, 20A, 500W(1ms)	DO-214AA	1d	1a	Pic
SLP	-	SMAJ150C	TVS	Vrwm=150V, Vbr=167..204V, 1.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
SLT	-	SACB18	TVS	Vrwm=18V, Vbr=20.0V, 15A, 500W(1ms)	DO-214AA	1d	1a	Pic
SLX	-	SACB22	TVS	Vrwm=22V, Vbr=24.4V, 14A, 500W(1ms)	DO-214AA	1d	1a	Pic
SM	-	1SMA33A	TVS	Vrwm=33V±5%, 7.5A, 400W (1ms)	403B-01	3d	2t	Ons
SM	-	BZX84J-B2V7	Zener diode	2.7V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SM	-	CD214A-T150A	TVS	Vrwm=150V, Irsm=1.6A, 400W(1ms)	DO-214AC	1d	1a	Brn

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
SM	-	P4SMA39CA	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 7.8A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SM	-	P4SMAJ150A	TVS	Vrwm=150V, 1.6A, 400W (1ms)	DO-214AB	1d	1a	Pjt
SM	-	PMF150A	TVS	Vbr=167..185V, Vrwm=150V, Ipp=0.82A, 200W(1ms)	SOD-123FL	7d	1a	Shp
SM	-	S1M	Si-diode	Rectifier, 1000V, 1A, Vf<1.1V(1A)	DO-214AC	1d	1k	Vs
SM	-	S1PM	Si-diode	Rectifier, 1000V, 1A, Vf<1.1V(1A)	DO-220AA	8d	1k	Vs
SM	-	S2M	Si-diode	Rectifier, 1000V, 1.5A, Vf<1.15V(1.5A)	DO-214AA	1d	1k	Vs
SM	-	S3M	Si-diode	Rectifier, 1000V, 3A, Vf<1.15V(2.5A)	DO-214AB	1d	1k	Vs
SM	-	SMAJ150A	TVS	Vrwm=150V, Vbr=167..185V, 1.2A, 400W(1ms)	DO-214AC	1d	1k	Vs
SM	-	SMAJ150A	TVS	Vrwm=150V, Vbr=167..185V, 1.2A, 400W(1ms)	DO-214AC	1d	1m	Di
SM	-	SMF150A	TVS	Vrwm=150V, Vbr=167..185V, Ipp=0.7A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
SM	-	TV04A151J-G	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=1.65A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SM17	-	SSM5817GP	Si-diode	SBR, 20V, 1A, Vf<0.45V(1A)	DO-214AC	1d	1a	Chm
SM18	-	SSM5818GP	Si-diode	SBR, 30V, 1A, Vf<0.55V(1A)	DO-214AC	1d	1a	Chm
SM19	-	SSM5819GP	Si-diode	SBR, 40V, 1A, Vf<0.6V(1A)	DO-214AC	1d	1a	Chm
SM84	-	SCM84PT	Si-diode	SBR, 40V, 8A, Vf<0.55V(8A)	DO-214AB	1d	1a	Chm
SMA10A	-	PSMA10A	TVS	Vrwm=10V, 23.5A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA11A	-	PSMA11A	TVS	Vrwm=11V, 22A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA12A	-	PSMA12A	TVS	Vrwm=12V, 20.1A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA13A	-	PSMA13A	TVS	Vrwm=13V, 18.6A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA14A	-	PSMA14A	TVS	Vrwm=14V, 17.2A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA15A	-	PSMA15A	TVS	Vrwm=15V, 16.4A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA16A	-	PSMA16A	TVS	Vrwm=16V, 15.4A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA17A	-	PSMA17A	TVS	Vrwm=17V, 14.5A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA18A	-	PSMA18A	TVS	Vrwm=18V 13.7A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA20A	-	PSMA20A	TVS	Vrwm=20V, 12.3A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA22A	-	PSMA22A	TVS	Vrwm=22V, 11.3A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA24A	-	PSMA24A	TVS	Vrwm=24V, 10.3A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA25B	-	PSMA5925B	Zener diode	10V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA26A	-	PSMA26A	TVS	Vrwm=26V, 9.5A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA26B	-	PSMA5926B	Zener diode	11V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA27B	-	PSMA5927B	Zener diode	12V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA28A	-	PSMA28A	TVS	Vrwm=28V, 8.8A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA28B	-	PSMA5928B	Zener diode	13V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA29B	-	PSMA5929B	Zener diode	15V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA30A	-	PSMA30A	TVS	Vrwm=30V, 8.3A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA30B	-	PSMA5930B	Zener diode	16V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA31B	-	PSMA5931B	Zener diode	18V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA32B	-	PSMA5932B	Zener diode	20V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA33A	-	PSMA33A	TVS	Vrwm=33V, 6.9A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA33B	-	PSMA5933B	Zener diode	22V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA34B	-	PSMA5934B	Zener diode	24V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA35B	-	PSMA5935B	Zener diode	27V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA36A	-	PSMA36A	TVS	Vrwm=36V, 6.2A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA36B	-	PSMA5936B	Zener diode	30V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA37B	-	PSMA5937B	Zener diode	33V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA38B	-	PSMA5938B	Zener diode	36V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA39B	-	PSMA5939B	Zener diode	39V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA40A	-	PSMA40A	TVS	Vrwm=40V, 5.8A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA40B	-	PSMA5940B	Zener diode	43V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA41B	-	PSMA5941B	Zener diode	47V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA42B	-	PSMA5942B	Zener diode	51V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA43A	-	PSMA43A	TVS	Vrwm=43V, 5.5A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA43B	-	PSMA5943B	Zener diode	56V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA44B	-	PSMA5944B	Zener diode	62V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA45A	-	PSMA45A	TVS	Vrwm=45V, 5.2A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA45B	-	PSMA5945B	Zener diode	68V±2.5%, If=500mA, 1.5W	DO-214AC	1d	1a	Phi
SMA48A	-	PSMA48A	TVS	Vrwm=48V, 4.9A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA51A	-	PSMA51A	TVS	Vrwm=51V, 4.6A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA54A	-	PSMA54A	TVS	Vrwm=54V, 4.3A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA58A	-	PSMA58A	TVS	Vrwm=58V, 4.1A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA60A	-	PSMA60A	TVS	Vrwm=60V, 3.9A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA64A	-	PSMA64A	TVS	Vrwm=64V, 3.6A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA70A	-	PSMA70A	TVS	Vrwm=70V, 3.5A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA75A	-	PSMA75A	TVS	Vrwm=75V, 3.3A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA78A	-	PSMA78A	TVS	Vrwm=78V, 3.2A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA8.5	-	PSMA8.5A	TVS	Vrwm=8.5V, 27.8A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMA9.0	-	PSMA9.0A	TVS	Vrwm=9V, 26A, 400W (1ms)	DO-214AC	1d	1a	Phi
SMC	-	1SMA33CA	TVS	Vrwm=33V±5%, 7.5A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
SME	-	SACB26	TVS	Vrwm=26V, Vbr=28.9V, 11.1A, 500W(1ms)	DO-214AA	1d	1a	Pic
SMK	-	SACB30	TVS	Vrwm=30V, Vbr=33.3V, 10A, 500W(1ms)	DO-214AA	1d	1a	Pic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
SML	-	FS1ML	Si-diode	Rectifier, 1000V, 1A, Vf<1.1V(1A), 1.8µs	DO-219AA	7d	2n	Fag
SMP	-	SACB36	TVS	Vrwm=36V, Vbr=40V, 8.6A, 500W(1ms)	DO-214AA	1d	1a	Pic
SMP	-	SMAJ150CA	TVS	Vrwm=150V, Vbr=167..185V, 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
SMV	-	SACB45	TVS	Vrwm=45V, Vbr=50V, 6.8A, 500W(1ms)	DO-214AA	1d	1a	Pic
SMZ	-	SACB50	TVS	Vrwm=50V, Vbr=55.5V, 5.8A, 500W(1ms)	DO-214AA	1d	1a	Pic
SN	-	BZX84J-B30	Zener diode	30V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SN	-	P4SMA43C	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SN	-	P4SMAJ160	TVS	Vrwm=160V, 1.4A, 400W (1ms)	DO-214AB	1d	1a	Pjt
SN	-	SM4T68	TVS	Vrwm=68V, 4.3A, 400W(1ms)	SOD-6	1d	1q	Ste
SN	-	SMAJ160	TVS	Vrwm=160V, Vbr=178..218V, 1A, 400W(1ms)	DO-214AC	1d	1k	Vs
SN	-	TV04A161K-G	TVS	Vrwm=160.0V, Vbr=178.0..218.0V, Ipp=1.39A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SNP	-	SMAJ160C	TVS	Vrwm=160V, Vbr=178..218V, 1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
SO	-	P4SMA43CA	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 7.1A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SP	-	1SMA36A	TVS	Vrwm=36V±5%, 6.9A, 400W (1ms)	403B-01	3d	2t	Ons
SP	-	BZX84J-B33	Zener diode	33V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SP	-	CD214A-T160A	TVS	Vrwm=160V, Irsm=1.5A, 400W(1ms)	DO-214AC	1d	1a	Brn
SP	-	CMDZ9L1	Zener diode	8.645..9.555V, Izt=0.5mA, Zzt=60Ω, 250mW	SOD-323	5d	1a	Cen
SP	-	KDZ30FVY	Zener diode	29.19..30.69V, Izt=2mA, Zzt=200Ω, 100mW	TFSC	7d	1a	Kec
SP	-	P4SMA47C	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.5A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SP	-	P4SMAJ160A	TVS	Vrwm=160V, 1.5A, 400W (1ms)	DO-214AB	1d	1a	Pjt
SP	-	PMF160A	TVS	Vbr=178..197V, Vrwm=160V, Ipp=0.77A, 200W(1ms)	SOD-123FL	7d	1a	Shp
SP	-	SM4T68A	TVS	Vrwm=68V, 4.3A, 400W(1ms)	SOD-6	1d	1q	Ste
SP	-	SMAJ160A	TVS	Vrwm=160V, Vbr=178..197V, 1.2A, 400W(1ms)	DO-214AC	1d	1m	Di
SP	-	SMAJ160A	TVS	Vrwm=160V, Vbr=178..197V, 1.2A, 400W(1ms)	DO-214AC	1d	1k	Vs
SP	-	SMF160A	TVS	Vrwm=160V, Vbr=178..197V, Ipp=0.7A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
SP	-	TV04A161J-G	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=1.54A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SPC	-	1SMA36CA	TVS	Vrwm=36V±5%, 6.9A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
SPP	-	SMAJ160CA	TVS	Vrwm=160V, Vbr=178..197V, 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
SQ	-	P4SMA51CA	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SQ	-	P4SMAJ170	TVS	Vrwm=170V, 1.3A, 400W (1ms)	DO-214AB	1d	1a	Pjt
SQ	-	SMAJ170	TVS	Vrwm=170V, Vbr=189..231V, 0.99A, 400W(1ms)	DO-214AC	1d	1k	Vs
SQ	-	TV04A171K-G	TVS	Vrwm=170.0V, Vbr=189.0..231.0V, Ipp=1.32A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SQP	-	SMAJ170C	TVS	Vrwm=170V, Vbr=189..209V, 0.99A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
SR	-	1SMA40A	TVS	Vrwm=40V±5%, 6.2A, 400W (1ms)	403B-01	3d	2t	Ons
SR	-	BZX84J-B36	Zener diode	36V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SR	-	CD214A-T170A	TVS	Vrwm=170V, Irsm=1.4A, 400W(1ms)	DO-214AC	1d	1a	Brn
SR	-	P4SMA47CA	TVS	Vbr=44.7..49.4V, Vrwm=40.2V, 6.5A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SR	-	P4SMAJ170A	TVS	Vrwm=170V, 1.4A, 400W (1ms)	DO-214AB	1d	1a	Pjt
SR	-	PMF170A	TVS	Vbr=189..209V, Vrwm=170V, Ipp=0.73A, 200W(1ms)	SOD-123FL	7d	1a	Shp
SR	-	SMAJ170A	TVS	Vrwm=170V, Vbr=189..209V, 1.4A, 400W(1ms)	DO-214AC	1d	1x	Vs
SR	-	SMAJ170A	TVS	Vrwm=170V, Vbr=189..209V, 1.4A, 400W(1ms)	DO-214AC	1d	1q	Ste
SR	-	SMAJ170A	TVS	Vrwm=170V, Vbr=189..209V, 1.4A, 400W(1ms)	DO-214AC	1d	1m	Di
SR	-	SMF170A	TVS	Vrwm=170V, Vbr=189..209V, Ipp=0.6A, 200W(1ms)	SOD-123FL	7d	1a	Pjt
SR	-	TV04A171J-G	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=1.45A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SRC	-	1SMA40CA	TVS	Vrwm=40V±5%, 6.2A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
SRP	-	SMAJ170CA	TVS	Vrwm=170V, Vbr=189..209V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Bts
SS	-	BZX84J-B39	Zener diode	39V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SS	-	P4SMA51C	TVS	Vbr=48.5..53.6V, Vrwm=43.6V, 6.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SS	-	P4SMAJ180	TVS	Vrwm=180V, 1.2A, 400W (1ms)	DO-214AB	1d	1a	Pjt
SS	-	SMAJ170CA	TVS	Vrwm=170V, Vbr=189..209V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1r	Ste
SS	-	SMAJ188A	TVS	Vrwm=188V, Vbr=209..231V, 0.91A, 400W(1ms)	DO-214AC	1d	1k	Vs
SS	-	TV04A181K-G	TVS	Vrwm=180.0V, Vbr=200.16..244.80V, Ipp=1.24A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SS12	-	SSM12PT	Si-diode	SBR, 20V, 1A, Vf<0.5V(1A)	DO-214AC	1d	1a	Chm
SS13	-	SSM13PT	Si-diode	SBR, 30V, 1A, Vf<0.5V(1A)	DO-214AC	1d	1a	Chm
SS14	-	SSM14PT	Si-diode	SBR, 40V, 1A, Vf<0.5V(1A)	DO-214AC	1d	1a	Chm
SS15	-	SSM15PT	Si-diode	SBR, 50V, 1A, Vf<0.7V(1A)	DO-214AC	1d	1a	Chm
SS16	-	SSM16PT	Si-diode	SBR, 60V, 1A, Vf<0.7V(1A)	DO-214AC	1d	1a	Chm
SS17	-	SSM17PT	Si-diode	SBR, 70V, 1A, Vf<0.75V(1A)	DO-214AC	1d	1a	Chm
SS18	-	SSM18PT	Si-diode	SBR, 80V, 1A, Vf<0.75V(1A)	DO-214AC	1d	1a	Chm
SS19	-	SSM19PT	Si-diode	SBR, 90V, 1A, Vf<0.8V(1A)	DO-214AC	1d	1a	Chm
SS22	-	SSM22PT	Si-diode	SBR, 20V, 2A, Vf<0.55V(2A)	SOD-123S	8d	1a	Chm
SS23	-	SSM23PT	Si-diode	SBR, 30V, 2A, Vf<0.55V(2A)	DO-214AC	1d	1a	Chm
SS24	-	SSM24PT	Si-diode	SBR, 40V, 2A, Vf<0.55V(2A)	DO-214AC	1d	1a	Chm
SS25	-	SSM25PT	Si-diode	SBR, 50V, 2A, Vf<0.7V(2A)	DO-214AC	1d	1a	Chm
SS26	-	SSM26PT	Si-diode	SBR, 60V, 2A, Vf<0.7V(2A)	DO-214AC	1d	1a	Chm
SS27	-	SSM27PT	Si-diode	SBR, 70V, 2A, Vf<0.75V(2A)	DO-214AC	1d	1a	Chm
SS28	-	SSM28PT	Si-diode	SBR, 80V, 2A, Vf<0.75V(2A)	DO-214AC	1d	1a	Chm
SS29	-	SSM29PT	Si-diode	SBR, 90V, 2A, Vf<0.8V(2A)	DO-214AC	1d	1a	Chm
SS32	-	SSM32PT	Si-diode	SBR, 20V, 3A, Vf<0.55V(3A)	DO-214AC	1d	1a	Chm
SS33	-	SSM33PT	Si-diode	SBR, 30V, 3A, Vf<0.55V(3A)	DO-214AC	1d	1a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
SS34	-	SSM34PT	Si-diode	SBR, 40V, 3A, Vf<0.55V(3A)	DO-214AC	1d	1a	Chm
SS35	-	SSM35PT	Si-diode	SBR, 50V, 3A, Vf<0.7V(3A)	DO-214AC	1d	1a	Chm
SS36	-	SSM36PT	Si-diode	SBR, 60V, 3A, Vf<0.7V(3A)	DO-214AC	1d	1a	Chm
SS52	-	SSM52GP	Si-diode	SBR, 20V, 5A, Vf<0.55V(5A)	DO-214AC	1d	1a	Chm
SS53	-	SSM53GP	Si-diode	SBR, 30V, 5A, Vf<0.55V(5A)	DO-214AC	1d	1a	Chm
SS54	-	SSM54GP	Si-diode	SBR, 40V, 5A, Vf<0.55V(5A)	DO-214AC	1d	1a	Chm
SS55	-	SSM55GP	Si-diode	SBR, 50V, 5A, Vf<0.7V(5A)	DO-214AC	1d	1a	Chm
SS56	-	SSM56GP	Si-diode	SBR, 60V, 5A, Vf<0.7V(5A)	DO-214AC	1d	1a	Chm
ST	-	1SMA43A	TVS	Vrwm=43V±5%, 5.8A, 400W (1ms),	403B-01	3d	2t	Ons
ST	-	BZX84J-B3V0	Zener diode	3.0V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
ST	-	P4SMA56C	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
ST	-	P4SMAJ180A	TVS	Vrwm=180V, 1.3A, 400W (1ms)	DO-214AB	1d	1a	Pjt
ST	-	PMF180A	TVS	Vbr=200..220V, Vrwm=180V, Ipp=0.69A, 200W(1ms)	SOD-123FL	7d	1a	Shp
ST	-	SMAJ180A	TVS	Vrwm=180V, Vbr=200..220V, 1.4A, 400W(1ms)	DO-214AC	1d	1a	Mco
ST	-	SMAJ188	TVS	Vrwm=188V, Vbr=209..231V, 0.9A, 400W(1ms)	DO-214AC	1d	1k	Vs
ST	-	TV04A181J-G	TVS	Vrwm=180.0V, Vbr=200.0..220.0V, Ipp=1.37A, 400W(1ms)	DO-214AC	1d	2o	Cmc
STC	-	1SMA43CA	TVS	Vrwm=43V±5%, 5.8A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
SU	-	BZX84J-B3V3	Zener diode	3.3V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SU	-	CH035H-20GP	Si-diode	SBD, 20V, 350mA, Vf<0.6V(200mA), 10ns	SOD-323	5d	1a	Chm
SU	-	P4SMA62C	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SU	-	P4SMAJ190	TVS	Vrwm=190V, 1.2A, 400W (1ms)	DO-214AB	1d	1a	Pjt
SU	-	PMF190A	TVS	Vbr=211..232V, Vrwm=190V, Ipp=0.69A, 200W(1ms)	SOD-123FL	7d	1a	Shp
SU	-	TV04A191K-G	TVS	Vrwm=190.0V, Vbr=211.28..258.40V, Ipp=1.18A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SUA	-	SMA6F5.0A	TVS	Vrwm=5.0V, Vbr=6.4..7.07V, Ipp=68A, 600W(1ms)	DO-221AC	7d	2s	Mco
SUG	-	SMA6F13A	TVS	Vrwm=13.0V, Vbr=14.4..15.9V, Ipp=29A, 600W(1ms)	DO-221AC	7d	2s	Mco
SUJ	-	SMA6F12A	TVS	Vrwm=12V, Vbr=13.3..14.7V, Ipp=31A, 600W(1ms)	DO-221AC	7d	2s	Mco
SV	-	1SMA45A	TVS	Vrwm=45V±5%, 5.5A, 400W (1ms)	403B-01	3d	2t	Ons
SV	-	BZX84J-B3V6	Zener diode	3.6V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SV	-	CH035H-30GP	Si-diode	SBD, 30V, 350mA, Vf<0.6V(200mA), 10ns	SOD-323	5d	1a	Chm
SV	-	P4SMA62CA	TVS	Vbr=58.9..65.1V, Vrwm=53.0V, 5.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SV	-	P4SMAJ190A	TVS	Vrwm=190V, 1.3A, 400W (1ms)	DO-214AB	1d	1a	Pjt
SV	-	P4SMAJ200A	TVS	Vrwm=200V, 1.2A, 400W(1ms)	DO-214AC	1d	1a	Lsr
SV	-	SMAJ200A	TVS	Vrwm=200V, Vbr=224..247V, 1.2A, 400W(1ms)	DO-214AC	1d	1a	Mco
SV	-	TV04A191J-G	TVS	Vrwm=190.0V, Vbr=211.0..232.0V, Ipp=1.30A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SVC	-	1SMA45CA	TVS	Vrwm=45V±5%, 5.5A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
SW	-	BZX84J-B3V9	Zener diode	3.9V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SW	-	CH035H-40GP	Si-diode	SBD, 40V, 350mA, Vf<0.6V(200mA), 10ns	SOD-323	5d	1a	Chm
SW	-	P4SMA68C	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 4.6A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SW	-	P4SMAJ200	TVS	Vrwm=200V, 1.1A, 400W (1ms)	DO-214AB	1d	1a	Pjt
SW	-	SM4T100	TVS	Vrwm=100V, 2.9A, 400W(1ms)	SOD-6	1d	1q	Ste
SW	-	TV04A201J-G	TVS	Vrwm=200.0V, Vbr=224.0..247.0V, Ipp=1.23A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SX	-	1SMA48A	TVS	Vrwm=48V±5%, 5.2A, 400W (1ms)	403B-01	3d	2t	Ons
SX	-	B130LAW	Si-diode	SBR, 30V, 1A, Vf<0.42V(1A), 40pF	SOD-123	5d	1d	Di
SX	-	BZX84J-B43	Zener diode	43V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SX	-	CH015H-40PT	Si-diode	SBD, 40V, 15mA, Vf<0.9V(15mA), 1ns	SOD-323	5d	1a	Chm
SX	-	P4SMA68CA	TVS	Vbr=64.6..71.4V, Vrwm=58.1V, 4.6A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SX	-	P4SMAJ200A	TVS	Vrwm=200V, 1.2A, 400W (1ms)	DO-214AB	1d	1a	Pjt
SX	-	P4SMAJ220A	TVS	Vrwm=220V, 1.1A, 400W(1ms)	DO-214AC	1d	1a	Lsr
SX	-	SM4T100A	TVS	Vrwm=100V, 2.9A, 400W(1ms)	SOD-6	1d	1q	Ste
SX	-	SMAJ220A	TVS	Vrwm=220V, Vbr=246..272V, 1.1A, 400W(1ms)	DO-214AC	1d	1a	Mco
SX	-	TV04A221J-G	TVS	Vrwm=220.0V, Vbr=246.0..272.0V, Ipp=1.12A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SXC	-	1SMA48CA	TVS	Vrwm=48V±5%, 5.2A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
SY	-	BZX84J-B47	Zener diode	47V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SY	-	CH015H-50PT	Si-diode	SBD, 50V, 15mA, Vf<0.95V(15mA), 1ns	SOD-323	5d	1a	Chm
SY	-	KDZ9.1VVY	Zener diode	8.85..9.23V, Izt=5mA, Zzt=18Ω, 100mW	VSC	7d	1a	Kec
SY	-	P4SMA75C	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SY	-	P4SMAJ210	TVS	Vrwm=210V, 1.1A, 400W (1ms)	DO-214AC	1d	1a	Pjt
SZ	-	1SMA51A	TVS	Vrwm=51V±5%, 4.9A, 400W (1ms)	403B-01	3d	2t	Ons
SZ	-	BZT52B27S	Zener diode	26.46..27.54V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Tsc
SZ	-	BZX84J-B4V3	Zener diode	4.3V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
SZ	-	CH015H-60PT	Si-diode	SBD, 60V, 15mA, Vf<1V(15mA), 1ns	SOD-323	5d	1a	Chm
SZ	-	MM3Z27VB	Zener diode	26.46..27.54V, Zzt=75Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
SZ	-	MM3Z27VBW	Zener diode	26.46..27.54V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Tac
SZ	-	P4SMA75CA	TVS	Vbr=71.3..78.8V, Vrwm=64.1V, 4.1A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
SZ	-	P4SMAJ210A	TVS	Vrwm=210V, 1.2A, 400W (1ms)	DO-214AC	1d	1a	Pjt
SZ	-	P4SMAJ250A	TVS	Vrwm=250V, 1.0A, 400W(1ms)	DO-214AC	1d	1a	Lsr
SZ	-	SMAJ250A	TVS	Vrwm=250V, Vbr=279..309V, 1.0A, 400W(1ms)	DO-214AC	1d	1a	Mco
SZ	-	TCMM3Z27VB	Zener diode	27V±2%, Izt=5mA, Zzt=75Ω, 200mW	SOD-323FL	7d	1a	Tac
SZ	-	TV04A251J-G	TVS	Vrwm=250.0V, Vbr=279.0..309.0V, Ipp=0.99A, 400W(1ms)	DO-214AC	1d	2o	Cmc
SZC	-	1SMA51CA	TVS	Vrwm=51V±5%, 4.9A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
T	-	1PS79SB40	Si-diode	SBD, U-Speed, 40V, 120mA, <5pF	SOD-523	6d	1a	Nxp
T	-	BAR67-02V	PIN-diode	Sw, RF, 150V, 200mA, 150mW, VF<1.2V(50mA), <0.9pF	SOD-523	6d	1a	Inf
T	-	BB515	C-diode	AM-tuning, 30V, 20mA, Ir<0.01µA, Cv=17.5/20pF	SOD-323	5d	1a	Sie
T	-	MA2S374	C-diode	CATV, 34V, 87/3.7pF(0/17V), 0.9Ω(470MHz)	SOD-523	6d	1a	Pan
T	-	MAZD075	Zener diode	7..7.9V, Zzt=20Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
T	-	MAZS024	Zener diode	2.28..2.6V, Iz=5mA, 200mW	SOD-523	6d	1a	Pan
T	-	MM9D18V	Zener diode	17.10..18.90V, Izt=5mA, Zzt=50Ω, 200mW	SOD-923	7d	1n	Wtr
T	-	MM9D3V0	Zener diode	2.85..3.15V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1b	Wtr
T	-	MMSZ5221BPT	Zener diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOD-523	6d	1a	Chm
t	-	MMSZ5241BPT	Zener diode	11V±5%, Izt=20mA, Zzt=22Ω, 225mW	SOD-523	6d	1a	Chm
T	-	NZ9F10VST	Zener diode	9.77..10.21V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	2m	Ons
T	-	NZ9F18VT	Zener diode	17.10..18.90V, Izt=5mA, Zzt=50Ω, 200mW	SOD-923	7d	1n	Ons
T	-	NZ9F3V0T	Zener diode	2.85..3.15V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1b	Ons
T	au	MMSZ5269BPT	Zener diode	82.65..91.35V, Izt=1.4mA, Zzt=370Ω, 225mW	SOD-523	6d	1a	Chm
T	ba	BB811	C-diode	SATV-tuning, 30V, 20mA, 1.02..8.8pF(28..1V), 2GHz	SOD-123	5d	2	Inf
T.	au	MMSZ5269SPT	Zener diode	85.26..88.74V, Izt=1.4mA, Zzt=370Ω, 225mW	SOD-523	6d	1a	Chm
T0	-	BZX384-C4V7	Zener diode	4.7V±5%, Izt=5mA, Zzt=50Ω, 200mW	SOD-323	5d	1a	Nxp
T0	-	MMPZ5250SPT	Zener diode	19.60..20.40V, Izt=5mA, Zzt=48Ω, 225mW	SOD-323	5d	1a	Chm
T064H	-	TB0640H	Thy-SPD	V Of-St=58V, 100A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T064L	-	TB0640L	Thy-SPD	V Of-St=58V, 30A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T064M	-	TB0640M	Thy-SPD	V Of-St=58V, 50A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T072H	-	TB0720H	Thy-SPD	V Of-St=65V, 100A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T072L	-	TB0720L	Thy-SPD	V Of-St=65V, 30A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T072M	-	TB0720M	Thy-SPD	V Of-St=65V, 50A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T090H	-	TB0900H	Thy-SPD	V Of-St=75V, 100A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T090L	-	TB0900L	Thy-SPD	V Of-St=75V, 30A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T090M	-	TB0900M	Thy-SPD	V Of-St=75V, 50A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T1	-	1PS79SB63	Si-diode	Schottky, Sw, 5V, 20mA, Vf<0.3V(1mA), <0.5pF	SOD-323	5d	1a	Phi
T1	-	BZX384-C6V2	Zener diode	6.2V±5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	1a	Nxp
T1	-	FS3A	Si-diode	Rectifier, 50V, 3A, Vf<1.15V(3A)	DO-214AB	1d	2j	Fag
T1	-	GDZ5V1B-V	Zener diode	4.98..5.20V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	2m	Vs
T1	-	MMSZ2V4T	Zener diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1u	Mot
T10	-	TPSMC10	TVS	Vbr=9.00..11.0V, Vrwm=8.10V, 100A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T10A	-	TPSMC10A	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 103A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T10C	-	TPSMC10C	TVS	Vbr=9.00..11.0V, Vrwm=8.10V, 100A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T10CA	-	TPSMC10CA	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, 103A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T11	-	TPSMC11	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 92.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T110H	-	TB1100H	Thy-SPD	V Of-St=90V, 100A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T110L	-	TB1100L	Thy-SPD	V Of-St=90V, 30A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T110M	-	TB1100M	Thy-SPD	V Of-St=90V, 50A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T11A	-	TPSMC11A	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 96.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T11C	-	TPSMC11C	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, 92.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T11CA	-	TPSMC11CA	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, 96.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T12	-	TPSMC12	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 86.7A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T12A	-	TPSMC12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 89.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T12C	-	TPSMC12C	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, 86.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T12CA	-	TPSMC12CA	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, 89.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T13	-	TPSMC13	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 78.9A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T130H	-	TB1300H	Thy-SPD	V Of-St=120V, 100A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T130L	-	TB1300L	Thy-SPD	V Of-St=120V, 30A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T130M	-	TB1300M	Thy-SPD	V Of-St=120V, 50A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T13A	-	TPSMC13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 82.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T13C	-	TPSMC13C	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, 78.9A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T13CA	-	TPSMC13CA	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, 82.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T15	-	TPSMC15	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, 68.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T150H	-	TB1500H	Thy-SPD	V Of-St=140V, 100A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T150L	-	TB1500L	Thy-SPD	V Of-St=140V, 30A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T150M	-	TB1500M	Thy-SPD	V Of-St=140V, 50A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T15A	-	TPSMC15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 70.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T15C	-	TPSMC15C	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, 68.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T15CA	-	TPSMC15CA	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, 70.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T16	-	TPSMC16	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 63.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T16A	-	TPSMC16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 66.7A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T16C	-	TPSMC16C	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, 63.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T16CA	-	TPSMC16CA	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, 66.7A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T18	-	TPSMC18	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 56.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T180H	-	TB1800H	Thy-SPD	V Of-St=160V, 100A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T180L	-	TB1800L	Thy-SPD	V Of-St=160V, 30A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T180M	-	TB1800M	Thy-SPD	V Of-St=160V, 50A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T18A	-	TPSMC18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 59.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
T18C	-	TPSMC18C	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, 56.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T18CA	-	TPSMC18CA	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, 59.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T2	-	1PS79SB17	Si-diode	Schottky, Sw, 4V, 30mA, Vf<0.6V(10mA), <0.65pF	SOD-523	6d	1a	Phi
T2	-	BAV19W	Si-diode	Sw, 100V, 200mA, Vf<1.25V(200mA), <50ns	SOD-123	5d	1a	Di
T2	-	BAV19WS	Si-diode	Sw, 100V, 200mA, Vf<1.25V(200mA), <50ns	SOD-323	5d	1a	Di
T2	-	BAV20W	Si-diode	Sw, 150V, 200mA, Vf<1.25V(200mA), <50ns	SOD-123	5d	1a	Di
T2	-	BAV20WS	Si-diode	Sw, 150V, 200mA, Vf<1.25V(200mA), <50ns	SOD-323	5d	1a	Di
T2	-	BZX384-C10	Zener diode	10V±5%, Izt=5mA, Zzt=8Ω, 200mW	SOD-323	5d	1a	Nxp
T2	-	FS3B	Si-diode	Rectifier, 100V, 3A, Vf<1.15V(3A)	DO-214AB	1d	2j	Fag
T2	-	GDZ5V6B-V	Zener diode	5.49..5.73V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	2m	Vs
T2	-	MM3Z2V4S	Zener diode	2.43..2.63V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323FL	7d	1u	Ons
T2	-	MMSZ2V7T	Zener diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1u	Mot
T20	-	TPSMC20	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 51.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T20A	-	TPSMC20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 54.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T20C	-	TPSMC20C	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, 51.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T20CA	-	TPSMC20CA	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, 54.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T22	-	TPSMC22	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 47.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T22A	-	TPSMC22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 49.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T22C	-	TPSMC22C	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, 47.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T22CA	-	TPSMC22CA	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, 49.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T230H	-	TB2300H	Thy-SPD	V Of-St=190V, 100A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T230L	-	TB2300L	Thy-SPD	V Of-St=190V, 30A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T230M	-	TB2300M	Thy-SPD	V Of-St=190V, 50A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T24	-	TPSMC24	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 43.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T24A	-	TPSMC24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 45.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T24C	-	TPSMC24C	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, 43.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T24CA	-	TPSMC24CA	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, 45.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T260H	-	TB2600H	Thy-SPD	V Of-St=220V, 100A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T260L	-	TB2600L	Thy-SPD	V Of-St=220V, 30A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T260M	-	TB2600M	Thy-SPD	V Of-St=220V, 50A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T27	-	TPSMC27	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 38.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T27A	-	TPSMC27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 40.0A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T27C	-	TPSMC27C	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, 38.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T27CA	-	TPSMC27CA	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, 40.0A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T3	-	1SV186	C-diode	UHF/SHF-tuning, 30V, 0.82..4.55pF(25..2V)	SOD-123	5d	1a	Tos
T3	-	1SV245	C-diode	UHF/SHF-Tun, 35V, 0.61..0.77pF(25V), Rs<2Ω(470MHz)	SOD-123	5d	1a	Tos
T3	-	1SV261	C-diode	UHF/SHF-tuning, 35V, 0.61..0.77pF(25V), Rs<2Ω(470MHz)	SOD-323	5d	1a	Tos
T3	-	BAV19W	Si-diode	Sw, 100V, 200mA, Vf<1.25V(200mA), <50ns	SOD-123	5d	1a	Di
T3	-	BAV19WS	Si-diode	Sw, 100V, 200mA, Vf<1.25V(200mA), <50ns	SOD-323	5d	1a	Di
T3	-	BAV20W	Si-diode	Sw, 150V, 200mA, Vf<1.25V(200mA), <50ns	SOD-123	5d	1a	Di
T3	-	BAV20WS	Si-diode	Sw, 150V, 200mA, Vf<1.25V(200mA), <50ns	SOD-323	5d	1a	Di
T3	-	BAV21W	Si-diode	Sw, 200V, 200mA, Vf<1.25V(200mA), <50ns	SOD-123	5d	1a	Di
T3	-	BAV21WS	Si-diode	Sw, 200V, 200mA, Vf<1.25V(200mA), <50ns	SOD-323	5d	1a	Di
T3	-	BZX384-C2V4	Zener diode	2.4V±5%, Izt=5mA, Zzt=70Ω, 200mW	SOD-323	5d	1a	Nxp
T3	-	FS3D	Si-diode	Rectifier, 200V, 3A, Vf<1.15V(3A)	DO-214AB	1d	2j	Fag
T3	-	GDZ6V2B-V	Zener diode	6.06..6.33V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	2m	Vs
T3	-	MM3Z2V7S	Zener diode	2.67..2.91V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323FL	7d	1u	Ons
T3	-	MMSZ3V0T	Zener diode	3.0V±5%, Izt=5mA, Zzt=95Ω, 500mW	SOD-123	5d	1u	Mot
T30	-	TPSMC30	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 34.5A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T30A	-	TPSMC30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 36.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T30C	-	TPSMC30C	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, 34.5A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T30CA	-	TPSMC30CA	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, 36.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T310H	-	TB3100H	Thy-SPD	V Of-St=275V, 100A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T310L	-	TB3100L	Thy-SPD	V Of-St=275V, 30A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T310M	-	TB3100M	Thy-SPD	V Of-St=275V, 50A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T33	-	TPSMC33	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 31.4A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T33A	-	TPSMC33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 32.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T33C	-	TPSMC33C	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, 31.4A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T33CA	-	TPSMC33CA	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, 32.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T350H	-	TB3500H	Thy-SPD	V Of-St=320V, 100A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T350L	-	TB3500L	Thy-SPD	V Of-St=320V, 30A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T350M	-	TB3500M	Thy-SPD	V Of-St=320V, 50A(1ms), Bidir.	DO-214AA	1ba	1x	Di
T36	-	TPSMC36	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 28.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T36A	-	TPSMC36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 30.1A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T36C	-	TPSMC36C	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, 28.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T36CA	-	TPSMC36CA	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, 30.1A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T39	-	TPSMC39	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 26.6A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T39A	-	TPSMC39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 27.8A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T39C	-	TPSMC39C	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, 26.6A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T39CA	-	TPSMC39CA	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, 27.8A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
T4	-	1N4148W	Si-diode	Sw, Fast, 75V, 150mA, <2pF, <4ns	SOD-123	5d	1a	Di
T4	-	1N4148WS	Si-diode	Sw, Fast, 75V, 150mA, <2pF, <4ns	SOD-323	5d	1a	Di
T4	-	1N4148WT	Si-diode	Sw, Fast, 100V, 125mA, <2pF, <4ns	SOD-523	6d	1a	Di
T4	-	1SV204	C-diode	VHF/UHF-AFC, 35V, 3.3/5.7pF(10V)	SOD-123	5d	1a	Tos
T4	-	1SV216	C-diode	VHF/UHF-AGC, 35V, 3.3/5.7pF(10V)	SOD-123	5d	1a	Tos
T4	-	1SV256	C-diode	VHF/UHF-AFC, 35V, 3.3/5.7pFpF(10V)	SOD-323	5d	1a	Tos
T4	-	BZX384-C2V7	Zener diode	2.7V±5%, Izt=5mA, Zzt=75Ω, 200mW	SOD-323	5d	1a	Nxp
T4	-	FS3G	Si-diode	Rectifier, 400V, 3A, Vf<1.15V(3A)	DO-214AB	1d	2j	Fag
T4	-	GDZ6V8B-V	Zener diode	6.65..6.93V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	2m	Vs
T4	-	MMSZ3V3T	Zener diode	3.3V±5%, Izt=5mA, Zzt=95Ω, 500mW	SOD-123	5d	1u	Mot
T43	-	TPSMC43	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 24.2A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T43A	-	TPSMC43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 25.3A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T43C	-	TPSMC43C	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, 24.2A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T43CA	-	TPSMC43CA	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, 25.3A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T5	-	1N4448HWS	Si-diode	Sw, Fast, 100V, 500mA, <2pF, <4ns	SOD-323	5d	1a	Di
T5	-	1N4448W	Si-diode	Sw, Fast, 100V, 500mA, <2pF, <4ns	SOD-123	5d	1a	Di
T5	-	1N4448WS	Si-diode	Sw, Fast, 100V, 500mA, <2pF, <4ns	SOD-323	5d	1a	Di
T5	-	BZX384-C3V0	Zener diode	3.0V±5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Nxp
T5	-	BZX584B30V	Zener diode	29.40..30.60V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523FL	7d	1a	Tac
T5	-	FS3J	Si-diode	Rectifier, 600V, 3A, Vf<1.15V(3A)	DO-214AB	1d	2j	Fag
T5	-	GDZ7V5B-V	Zener diode	7.28..7.6V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	2m	Vs
T5	-	MM3Z3V3S	Zener diode	3.32..3.53V, Izt=5mA, Zzt=95Ω, 200mW	SOD-323FL	7d	1u	Ons
T5	-	MM5Z30VB	Zener diode	29.40..30.60V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523FL	7d	1a	Tac
T5	-	MMSZ3V6T	Zener diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1u	Mot
T6	-	1SV211	C-diode	UHF-CATV-tuning, 30V, 33..39pF(2V)	SOD-123	5d	1a	Tos
T6	-	1SV217	C-diode	UHF-CATV-Tunug, 30V, 33..39pF(2V)	SOD-323	5d	1a	Tos
T6	-	BAV16W	Si-diode	Sw, Fast, 100V, 300mA, <2pF, <2ns	SOD-123	5d	1a	Di
T6	-	BAV16WS	Si-diode	Sw, Fast, 100V, 300mA, <2pF, <2ns	SOD-323	5d	1a	Di
T6	-	BZX384-C3V3	Zener diode	3.3V±5%, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	1a	Nxp
T6	-	FS3K	Si-diode	Rectifier, 800V, 3A, Vf<1.15V(3A)	DO-214AB	1d	2j	Fag
T6	-	GDZ8V2B-V	Zener diode	8.02..8.36V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	2m	Vs
T6	-	MM3Z3V6S	Zener diode	3.60..3.85V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1u	Ons
T6.8	-	TPSMC6.8	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 139A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T6.8A	-	TPSMC6.8A	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 143A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T6.8C	-	TPSMC6.8C	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, 139A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T6.8CA	-	TPSMC6.8CA	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, 143A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T7	-	1SV224	C-diode	CATV, 35V, 1.7/2.1pF(20V)	SOD-123	5d	1a	Tos
T7	-	1SV230	C-diode	CATV, 35V, 1.7/2.1pF(20V)	SOD-123	5d	1a	Tos
T7	-	1SV258	C-diode	CATV, 35V, 1.7/2.1pF(20V)	SOD-323	5d	1a	Tos
T7	-	BZX384-C3V6	Zener diode	3.6V±5%, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	1a	Nxp
T7	-	FS3M	Si-diode	Rectifier, 1000V, 3A, Vf<1.15V(3A)	DO-214AB	1d	2j	Fag
T7	-	GDZ9V1B-V	Zener diode	8.85..9.23V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	2m	Vs
T7	-	MM3Z3V9S	Zener diode	3.89..4.16V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1u	Ons
T7.5	-	TPSMC7.5	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 128A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T7.5A	-	TPSMC7.5A	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 132A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T7.5C	-	TPSMC7.5C	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, 128A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T7.5CA	-	TPSMC7.5CA	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, 132A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T8	-	1N4148HWT	Si-diode	Sw, Fast, 100V, 125mA, <2pF, <4ns	SOD-523	6d	1a	Di
T8	-	1SV212	C-diode	UHF-VCO, 15V, 5.5/6.5pF(10V)	SOD-123	5d	1a	Tos
T8	-	1SV229	C-diode	UHF-VCO, 15V, 5.5/6.5pF(10V)	SOD-323	5d	1a	Tos
T8	-	1SV257	C-diode	UHF-VCO, 15V, 6..15pF(10..2V)	1F1A	5d	1a	Tos
T8	-	BZT52C16WT	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523	6d	1a	Ttr
T8	-	BZX384-C3V9	Zener diode	3.9V±5%, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	1a	Nxp
T8	-	GDZ10B-V	Zener diode	9.77..10.21V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	2m	Vs
T8	-	MM3Z4V3S	Zener diode	4.17..4.43V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1u	Ons
T8	-	MM5Z16H	Zener diode	15.3..17.1V, Izt=2mA, Zzt=40Ω, 200mW	SOD-523	6d	1a	Zow
T8	-	MM5Z16V	Zener diode	16V±5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-523	6d	1a	Eic
T8.2	-	TPSMC8.2	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 120A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T8.2A	-	TPSMC8.2A	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 124A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T8.2C	-	TPSMC8.2C	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, 120A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T8.2CA	-	TPSMC8.2CA	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, 124A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
T9	-	1SV227	C-diode	CATV-tuning, 35V, 2.75/3.1pF(25V)	SOD-123	5d	1a	Tos
T9	-	1SV232	C-diode	CATV-tuning, 35V, 2.75/3.1pF(25V)	SOD-123	5d	1a	Tos
T9	-	1SV259	C-diode	CATV-tuning, 35V, 2.75/3.1pF(25V)	SOD-323	5d	1a	Tos
T9	-	BZX384-C4V3	Zener diode	4.3V±5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Nxp
T9	-	GDZ11B-V	Zener diode	10.76..11.22V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	2m	Vs
T9	-	MM3Z4V7S	Zener diode	4.55..4.75V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1u	Ons
T9.1	-	TPSMC9.1	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 109A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T9.1A	-	TPSMC9.1A	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 112A, 1500W(1ms)	DO-214AB	1d	1a	Eic
T9.1C	-	TPSMC9.1C	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, 109A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
T9.1CA	-	TPSMC9.1CA	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, 112A, 1500W(1ms), Bidir.	DO-214AB	1ba	1j	Eic
TA	-	1SV226	C-diode	CATV-tuning, 35V, 2.7/3.4pF(25V)	SOD-123	5d	1a	Tos
TA	-	1SV231	C-diode	CATV-tuning, 35V, 2.7/3.4pF(25V)	SOD-123	5d	1a	Tos
TA	-	BZX84J-B4V7	Zener diode	4.7V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TA	-	GDZ12B-V	Zener diode	11.74..12.24V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	2m	Vs
TA	-	MM3Z5V1S	Zener diode	4.98..5.2V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323FL	7d	1u	Ons
TB	-	1SV238	C-diode	CATV-tuning, 35V, 2.75/3.25pF(25V)	SOD-123	5d	1a	Tos
TB	-	BZX84J-B51	Zener diode	51V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TB	-	GDZ13B-V	Zener diode	12.91..13.49V, Izt=5mA, Zzt=37Ω, 200mW	SOD-323	5d	2m	Vs
TB	-	KDZ10B	Zener diode	10V±2.5%, 40mA, 1W	PMDU	7d	1s	Rhm
TB	-	SMF140A	TVS	Vrwm=140V, Vbr=155.0..171.0V, 0.89A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
TB	-	TV02W141-G	TVS	Vrwm=140V, Vbr=155..171V, Ipp=0.89A, 200W(1ms)	SOD-123	5d	2o	Cmc
TC	-	1SV239	C-diode	UHF-VCO, 15V, 1.5/2pF(10V)	SOD-123	5d	1a	Tos
TC	-	1SV260	C-diode	UHF-VCO, 15V, 1.5/2pF(10V)	SOD-323	5d	1a	Tos
TC	-	BZX84J-B56	Zener diode	56V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TC	-	GDZ15B-V	Zener diode	14.34..14.98V, Izt=5mA, Zzt=42Ω, 200mW	SOD-323	5d	2m	Vs
TC	-	MM3Z5V6S	Zener diode	5.49..5.73V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1u	Ons
TD	-	1SV262	C-diode	UHF-CATV-tuning, 36V, 2.6..3pF(25V)	SOD-123	5d	1a	Tos
TD	-	BZX84J-B5V1	Zener diode	5.1V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TD	-	GDZ16B-V	Zener diode	15.85..16.51V, Izt=5mA, Zzt=50Ω, 200mW	SOD-323	5d	2m	Vs
TD	-	P4SMAJ5.0C	TVS	Vrwm=5V, 41.6A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TD	-	P6SMB47C	TVS	Vrwm=47V, Vbr=44.7..49.4V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TE	-	1SMA54A	TVS	Vrwm=54V±5%, 4.6A, 400W (1ms)	403B-01	3d	2t	Ons
TE	-	1SV269	C-diode	CATV-tuning, 36V, 2.5/2.9pF(25V)	SOD-123	5d	1a	Tos
TE	-	BZX84J-B5V6	Zener diode	5.6V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TE	-	CD214A-T5.0CA	TVS	Vrwm=5.0V, Irsm=43.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
TE	-	GDZ18B-V	Zener diode	17.56..18.35V, Izt=5mA, Zzt=65Ω, 200mW	SOD-323	5d	2m	Vs
TE	-	MM3Z6V2S	Zener diode	6.06..6.33V, Izt=5mA, Zzt=10Ω, 200mW	SOD-323FL	7d	1u	Ons
TE	-	P4SMAJ300A	TVS	Vrwm=300V, 0.8A, 400W(1ms)	DO-214AC	1d	1a	Lsr
TE	-	P4SMAJ5.0CA	TVS	Vrwm=5V, 43.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TE	-	P6SMB47CA	TVS	Vrwm=47V, Vbr=44.7..49.4V, 9.3A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TE	-	SMAJ300A	TVS	Vrwm=300V, Vbr=335..371V, 0.8A, 400W(1ms)	DO-214AC	1d	1a	Mco
TE	-	SMAJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 43.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
TE	-	SMF110A	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, 1.13A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
TE	-	TV02W111-G	TVS	Vrwm=110V, Vbr=122..135V, Ipp=1.13A, 200W(1ms)	SOD-123	5d	2o	Cmc
TEC	-	1SMA54CA	TVS	Vrwm=54V±5%, 4.6A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
TF	-	1SV270	C-diode	UHF,VCO, 10V, 8.7..16pF(4..1V)	SOD-123	5d	1a	Tos
TF	-	BZX84J-B62	Zener diode	62V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TF	-	KDZ36FV	Zener diode	34.0..38.0V, Izt=2mA, Zzt=300Ω, 100mW	TFSC	7d	1a	Kec
TF	-	MM3Z6V8S	Zener diode	6.65..6.93V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323FL	7d	1u	Ons
TF	-	P4SMAJ6.0C	TVS	Vrwm=6V, 35.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TF	-	P6SMB51C	TVS	Vrwm=51V, Vbr=48.5..53.6V, 8.2A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TG	-	1SMA58A	TVS	Vrwm=58V±5%, 4.8A, 400W (1ms)	403B-01	3d	2t	Ons
TG	-	BZX84J-B68	Zener diode	68V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TG	-	CD214A-T6.0CA	TVS	Vrwm=6.0V, Irsm=38.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
TG	-	MM3Z7V5S	Zener diode	7.28..7.6V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323FL	7d	1u	Ons
TG	-	P4SMAJ350A	TVS	Vrwm=350V, 0.7A, 400W(1ms)	DO-214AC	1d	1a	Lsr
TG	-	P4SMAJ6.0CA	TVS	Vrwm=6V, 38.8A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TG	-	P6SMB51CA	TVS	Vrwm=51V, Vbr=48.5..53.6V, 8.6A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TG	-	SMAJ350A	TVS	Vrwm=350V, Vbr=391..432V, 0.7A, 400W(1ms)	DO-214AC	1d	1a	Mco
TG	-	SMAJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 38.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
TG	-	SMF120A	TVS	Vrwm=120.0V, Vbr=133.0.. 147.0V, 1.04A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
TG	-	TV02W121-G	TVS	Vrwm=120V, Vbr=133..147V, Ipp=1.04A, 200W(1ms)	SOD-123	5d	2o	Cmc
TGC	-	1SMA58CA	TVS	Vrwm=58V±5%, 4.3A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
TH	-	1SV293	C-diode	VCO for UHF-Band, 10V, 20/11.6pF(1/4V), Rs<0.4Ω	SOD-123	5d	1a	Tos
TH	-	BZX84J-B6V2	Zener diode	6.2V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TH	-	GDZ20B-V	Zener diode	19.52..20.39V, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	2m	Vs
TH	-	MM3Z8V2S	Zener diode	8.02..8.36V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323FL	7d	1u	Ons
TH	-	P4SMAJ6.5C	TVS	Vrwm=6.5V, 32.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TH	-	P6SMB56C	TVS	Vrwm=56V, Vbr=53.2..58.8V, 7.4A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TH	-	SM4T150	TVS	Vrwm=150V, 2A, 400W(1ms)	SOD-6	1d	1q	Ste
TJ	-	1SV288	C-diode	CATV-tuning, 35V, 45/2.8pF(2/25V)	SOD-123	5d	1a	Tos
TJ	-	1SV290	C-diode	CATV-tuning, 35V, 45/2.8pF(2/25V)	SOD-323	5d	1a	Tos
TK	-	1SMA60A	TVS	Vrwm=60V±5%, 4.1A, 400W (1ms)	403B-01	3d	2t	Ons
TK	-	1SV287	C-diode	UHF/SHF-tuning, 35V, 0.53..0.68pF(25V), Rs<2.3Ω(470MHz)	SOD-123	5d	1a	Tos
TK	-	1SV291	C-diode	UHF/SHF-tuning, 35V, 0.53..0.68pF(25V), Rs<2.3Ω(470MHz)	SOD-323	5d	1a	Tos
TK	-	BZX84J-B6V8	Zener diode	6.8V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TK	-	CD214A-T6.5CA	TVS	Vrwm=6.5V, Irsm=35.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
TK	-	GDZ22B-V	Zener diode	21.54..22.47V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	2m	Vs
TK	-	MM3Z9V1S	Zener diode	8.85..9.23V, 5mA, Zzt=15Ω, 200mW	SOD-323FL	7d	1u	Ons

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
TK	-	P4SMAJ400A	TVS	Vrwm=400V, 0.6A, 400W(1ms)	DO-214AC	1d	1a	Lsr
TK	-	P4SMAJ6.5CA	TVS	Vrwm=6.5V, 35.7A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TK	-	P6SMB56CA	TVS	Vrwm=56V, Vbr=53.2..58.8V, 7.8A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TK	-	SM4T150A	TVS	Vrwm=150V, 2A, 400W(1ms)	SOD-6	1d	1q	Ste
TK	-	SMAJ400A	TVS	Vrwm=400V, Vbr=447..494V, 0.6A, 400W(1ms)	DO-214AC	1d	1a	Mco
TK	-	SMAJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 35.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
TK	-	SMF130A	TVS	Vrwm=130V, Vbr=144.0..159.0V, 0.96A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
TK	-	TV02W131-G	TVS	Vrwm=130V, Vbr=144..159V, Ipp=0.96A, 200W(1ms)	SOD-123	5d	2o	Cmc
TKC	-	1SMA60CA	TVS	Vrwm=60V±5%, 4.1A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
TL	-	BZX84J-B75	Zener diode	75V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TL	-	GDZ24B-V	Zener diode	23.72..24.78V, Izt=5mA, Zzt=120Ω, 200mW	SOD-323	5d	2m	Vs
TL	-	P4SMAJ7.0C	TVS	Vrwm=7V, 30.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TL	-	P6SMB62C	TVS	Vrwm=62V, Vbr=58.9..65.1V, 7.1A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TM	-	1SMA64A	TVS	Vrwm=64V±5%, 3.9A, 400W (1ms)	403B-01	3d	2t	Ons
TM	-	BZX84J-B7V5	Zener diode	7.5V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TM	-	CD214A-T7.0CA	TVS	Vrwm=7.0V, Irsm=33.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
TM	-	GDZ27B-V	Zener diode	26.19..27.53V, Izt=5mA, Zzt=150Ω, 200mW	SOD-323	5d	2m	Vs
TM	-	P4SMAJ440A	TVS	Vrwm=440V, 0.6A, 400W(1ms)	DO-214AC	1d	1a	Lsr
TM	-	P4SMAJ7.0CA	TVS	Vrwm=7V, 33.3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TM	-	P6SMB62CA	TVS	Vrwm=62V, Vbr=58.9..65.1V, 7.1A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TM	-	SMAJ440A	TVS	Vrwm=440V, Vbr=492..543V, 0.6A, 400W(1ms)	DO-214AC	1d	1a	Mco
TM	-	SMAJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.6V, 33.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
TM	-	SMF150A	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, 0.82A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
TM	-	TV02W151-G	TVS	Vrwm=150V, Vbr=167..185V, Ipp=0.82A, 200W(1ms)	SOD-123	5d	2o	Cmc
TMC	-	1SMA64CA	TVS	Vrwm=64V±5%, 3.9A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
TN	-	BZX84J-B8V2	Zener diode	8.2V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TN	-	GDZ30B-V	Zener diode	29.19..30.69V, Izt=5mA, Zzt=200Ω, 200mW	SOD-323	5d	2m	Vs
TN	-	MM3Z12VS	Zener diode	11.74..12.24V, Izt=5mA, Zzt=25Ω, 200mW	SOD-323FL	7d	1u	Ons
TN	-	P4SMAJ7.5C	TVS	Vrwm=7.5V, 28A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TN	-	P6SMB68C	TVS	Vrwm=68V, Vbr=64.6..71.4V, 6.5A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TP	-	1SMA70A	TVS	Vrwm=70V±5%, 3.5A, 400W (1ms)	403B-01	3d	2t	Ons
TP	-	BZX84J-B9V1	Zener diode	9.1V±2%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TP	-	CD214A-T7.5CA	TVS	Vrwm=7.5V, Irsm=31.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
TP	-	CMDZ10L	Zener diode	9.50..10.50V, Izt=0.5mA, Zzt=80Ω, 250mW	SOD-323	5d	1a	Cen
TP	-	GDZ33B-V	Zener diode	32.15..33.79V, Izt=5mA, Zzt=250Ω, 200mW	SOD-323	5d	2m	Vs
TP	-	KDZ36FVY	Zener diode	35.07..36.87V, Izt=2mA, Zzt=300Ω, 100mW	TFSC	7d	1a	Kec
TP	-	MM3Z15VS	Zener diode	14.34..14.98V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1u	Ons
TP	-	P4SMAJ7.5CA	TVS	Vrwm=7.5V, 31A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TP	-	P6SMB68CA	TVS	Vrwm=68V, Vbr=64.6..71.4V, 6.5A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TP	-	SMAJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 31A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
TP	-	SMF160A	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, 0.77A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
TP	-	TV02W161-G	TVS	Vrwm=160V, Vbr=178..197V, Ipp=0.77A, 200W(1ms)	SOD-123	5d	2o	Cmc
TPC	-	1SMA70CA	TVS	Vrwm=70V±5%, 3.5A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
TQ	-	P4SMAJ8.0C	TVS	Vrwm=8V, 26.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TQ	-	P6SMB75C	TVS	Vrwm=75V, Vbr=71.3..78.8V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TR	-	1SMA75A	TVS	Vrwm=75V±5%, 3.3A, 400W (1ms)	403B-01	3d	2t	Ons
TR	-	BZX84J-C10	Zener diode	10V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TR	-	CD214A-T8.0CA	TVS	Vrwm=8.0V, Irsm=29.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
TR	-	P4SMAJ8.0CA	TVS	Vrwm=8V, 29.4A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TR	-	P6SMB75CA	TVS	Vrwm=75V, Vbr=71.3..78.8V, 5.8A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TR	-	SMAJ8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 29.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
TR	-	SMF170A	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, 0.73A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
TR	-	TV02W171-G	TVS	Vrwm=170V, Vbr=189..209V, Ipp=0.73A, 200W(1ms)	SOD-123	5d	2o	Cmc
TRC	-	1SMA75CA	TVS	Vrwm=75V±5%, 3.3A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
TS	-	1SMA78A	TVS	Vrwm=78V±5%, 3.2A, 400W (1ms)	403B-01	3d	2t	Ons
TS	-	BZX84J-C11	Zener diode	11V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TS	-	P4SMAJ8.5C	TVS	Vrwm=8.5V, 25.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TS	-	P6SMB82C	TVS	Vrwm=82V, Vbr=77.9..86.1V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TS	-	SM4T200	TVS	Vrwm=200V, 1.5A, 400W(1ms)	SOD-6	1d	1q	Ste
TSC	-	1SMA78CA	TVS	Vrwm=78V±5%, 3.2A, 400W (1ms), Bidir.	403B-01	3ba	2t	Ons
TT	-	1SV302	C-diode	CATV-tuning, 35V, 47/2.6pF(2..25V)	SOD-123	5d	1a	Tos
TT	-	1SV303	C-diode	CATV-tuning, 30V, 2.6/47pF(25V..2V), Rs<1.25Ω	SOD-523	6d	1a	Tos
TT	-	BZX84J-C12	Zener diode	12V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TT	-	CD214A-T8.5CA	TVS	Vrwm=8.5V, Irsm=27.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
TT	-	GDZ36B-V	Zener diode	35.07..36.87V, Izt=5mA, Zzt=300Ω, 200mW	SOD-323	5d	2m	Vs
TT	-	P4SMAJ8.5CA	TVS	Vrwm=8.5V, 27.7A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TT	-	P6SMB82CA	TVS	Vrwm=82V, Vbr=77.9..86.1V, 5.3A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TT	-	SM4T200A	TVS	Vrwm=200V, 1.5A, 400W(1ms)	SOD-6	1d	1q	Ste
TT	-	SMAJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 27.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
TT	-	SMF180A	TVS	Vrwm=180.0V, Vbr=200.0..220.0V, 0.69A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
TT	-	TV02W181-G	TVS	Vrwm=180V, Vbr=200..220V, Ipp=0.69A, 200W(1ms)	SOD-123	5d	2o	Cmc
TU	-	BZX84J-C13	Zener diode	13V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TU	-	MM3Z16VS	Zener diode	15.85..16.51V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323FL	7d	1u	Ons
TU	-	P4SMAJ9.0C	TVS	Vrwm=9V, 23.6A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TU	-	P6SMB91C	TVS	Vrwm=91V, Vbr=86.5..95.5V, 4.8A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TU	-	SM4T220	TVS	Vrwm=220V, 1.4A, 400W(1ms)	SOD-6	1d	1q	Ste
TV	-	1SV304	C-diode	VCO-VHF-Band Radio, 10V, 19.3/6.6pF(1..4V), Rs<0.32Ω	SOD-123	5d	1a	Tos
TV	-	1SV305	C-diode	VHF-VCO, 10V, 6.1..18.3.pF(4..1V), Rs<0.32Ω	SOD-523	6d	1a	Tos
TV	-	BZX84J-C15	Zener diode	15V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TV	-	CD214A-T9.0CA	TVS	Vrwm=9.0V, Irsm=26.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
TV	-	P4SMAJ9.0CA	TVS	Vrwm=9V, 26A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TV	-	P6SMB91CA	TVS	Vrwm=91V, Vbr=86.5..95.5V, 4.8A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TV	-	SM4T220A	TVS	Vrwm=220V, 1.4A, 400W(1ms)	SOD-6	1d	1q	Ste
TV	-	SMA6J9.0CA	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, Ipp=39.0A, 600W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
TV	-	SMAJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, 26A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
TV	-	SMF190A	TVS	Vrwm=190.0V, Vbr=211.0..232.0V, 0.69A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
TV	-	TV02W191-G	TVS	Vrwm=190V, Vbr=211..232V, Ipp=0.69A, 200W(1ms)	SOD-123	5d	2o	Cmc
TW	-	BZX84J-C16	Zener diode	16V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TW	-	MM3Z18VS	Zener diode	17.56..18.35V, Izt=5mA, Zzt=45Ω, 200mW	SOD-323FL	7d	1u	Ons
TW	-	P4SMAJ10C	TVS	Vrwm=10V, 21.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TW	-	P6SMB100C	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TX	-	BZX84J-C18	Zener diode	18V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TX	-	CD214A-T10CA	TVS	Vrwm=10V, Irsm=23.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
TX	-	MM3Z3V3T	Zener diode	3.19..3.41V, Izt=5mA, Zzt=95Ω, 200mW	SOD-323FL	7d	1u	Ons
TX	-	P4SMAJ10CA	TVS	Vrwm=10V, 23.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TX	-	P6SMB100CA	TVS	Vrwm=100V, Vbr=95..105V, 4.4A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TX	-	SMA6J10CA	TVS	Vbr=11.1..12.3V, Vrwm=10V, Ipp=35.3A, 600W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
TX	-	SMAJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.3V, 21.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
TY	-	1SS241	C-diode	VHF-Band-Sw, 30V, <1.2pF(6V), <0.9Ω	SOD-123	5d	1a	Tos
TY	-	1SS314	C-diode	UHF-Band Switch, 30V, 100mA, 0.7pF(6V), <0.9Ω	SOD-323	5d	1a	Tos
TY	-	1SS371	C-diode	VHF-Band-Sw, 30V, <1.2pF(6V), <0.9Ω	SOD-323	5d	1a	Tos
TY	-	1SS381	Si-diode	VHF Tuner Band Switch, 30V, 100mA, 0.7pF, <0.6Ω(100MHz)	SOD-523	6d	1a	Tos
TY	-	BZX84J-C20	Zener diode	20V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TY	-	KDZ27VVY	Zener diode	26.19..27.53V, Izt=2mA, Zzt=150Ω, 100mW	VSC	7d	1a	Kec
TY	-	P4SMAJ11C	TVS	Vrwm=11V, 20A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TY	-	P6SMB110C	TVS	Vrwm=110V, Vbr=105..116V, 3.9A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TZ	-	BZT52B30S	Zener diode	29.40..30.60V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Tsc
TZ	-	BZX84J-C22	Zener diode	22V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
TZ	-	CD214A-T11CA	TVS	Vrwm=11V, Irsm=22.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
TZ	-	MM3Z30VB	Zener diode	29.40..30.60V, Zzt=75Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
TZ	-	MM3Z30VBW	Zener diode	29.40..30.60V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Tac
TZ	-	P4SMAJ11CA	TVS	Vrwm=11V, 22A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
TZ	-	P6SMB110CA	TVS	Vrwm=110V, Vbr=105..116V, 3.9A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
TZ	-	SMA6J11CA	TVS	Vbr=12.2..13.5V, Vrwm=11V, Ipp=33.0A, 600W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
TZ	-	SMAJ11CA	TVS	Vrwm=11V, Vbr=12.2..13.5V, 22A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
TZ	-	TCMM3Z30VB	Zener diode	30V±2%, Izt=5mA, Zzt=75Ω, 200mW	SOD-323FL	7d	1a	Tac
U	-	BAR88-02V	Si-diode	Ant, Sw, 80V, 0.1A, 250mW, Vf<1.2V(100mA), 0.28pF(1GHz)	SOD-523	5d	1a	Inf
U	-	BB145	C-diode	VCO, 6V, 20mA, 2.75/6.4pF(4V/1V, 1MHz), <0.6Ω	SOD-523	6d	1a	Phi
U	-	HVU355	C-diode	VCO, 15V, 6.4/7.4pF(1V)	SOD-323	5d	1a	Ren
U	-	MA2SV01	C-diode	VCO, 6V, 16..6pF(1..3V)	SOD-523	6d	1a	Pan
U	-	MMSZ5222BPT	Zener diode	2.5V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOD-523	6d	1a	Chm
U	au	MMSZ5270BPT	Zener diode	91V±5%, Izt=1.4mA, Zzt=400Ω, 225mW	SOD-523	6d	1a	Chm
U	ba	BB545	C-diode	UHF TV-tuning, 30V, 20mA, 2.2..21.5pF(28..1V)	SOD-323	5d	2	Inf
U.	-	MMSZ5222SPT	Zener diode	2.5V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOD-523	6d	1a	Chm
U.	au	MMSZ5270SPT	Zener diode	91V±5%, Izt=1.4mA, Zzt=400Ω, 225mW	SOD-523	6d	1a	Chm
U01	-	SMTPA62	TVS	Vrwm=62V, 50A(1ms), 5W, Bidir.	DO-214AA	1ba	1r	Ste
U05	-	SMTPA68	TVS	Vrwm=68V, 50A(1ms), 5W, Bidir.	DO-214AA	1ba	1r	Ste
U1	-	BZX84J-C24	Zener diode	24V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
U1	-	FES1A	Si-diode	U-fast Recovery, 50V, 1A, Vf<0.95V(1A), <50ns	DO-214AC	1d	2j	Fag
U1	-	GDZ5V1B-V-G	Zener diode	4.98..5.20V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	2m	Vs
U1	-	MMSZ3V9T	Zener diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1u	Mot
U1	-	UDZ56B	Zener diode	56V±2.5%, Izt=2mA, 200mW	SOD-323	5d	1d	Di
U10A	-	UGF10A	Si-diode	U-fast Rec. Rect., 50V, 1A, Vf<0.95V(1A), 35ns	DO-214AC	1d	1b	Zow
U10B	-	UGF10B	Si-diode	U-fast Rec. Rect., 100V, 1A, Vf<0.95V(1A), 35ns	DO-214AC	1d	1b	Zow
U10D	-	UGF10D	Si-diode	U-fast Rec. Rect., 200V, 1A, Vf<0.95V(1A), 35ns	DO-214AC	1d	1b	Zow
U10G	-	UGF10G	Si-diode	U-fast Rec. Rect., 400V, 1A, Vf<1.25V(1A), 35ns	DO-214AC	1d	1b	Zow
U10J	-	UGF10J	Si-diode	U-fast Rec. Rect., 600V, 1A, Vf<1.7V(1A), 35ns	DO-214AC	1d	1b	Zow
U10K	-	UGF10K	Si-diode	U-fast Rec. Rect., 800V, 1A, Vf<2.2V(1A), 35ns	DO-214AC	1d	1b	Zow
U11	-	USM11SPT	Si-diode	Rectifer, S-fast, 50V, 1A	SOD-123S	7d	1a	Chm
U12	-	USM12SPT	Si-diode	Rectifer, S-fast, 100V, 1A	SOD-123S	7d	1a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
U13	-	SMTPA100	TVS	Vrwm=100V, 50A(1ms), 5W, Bidir.	DO-214AA	1ba	1r	Ste
U13	-	USM13SPT	Si-diode	Rectifer, S-fast, 200V, 1A	SOD-123S	7d	1a	Chm
U14	-	USM14SPT	Si-diode	Rectifer, S-fast, 300V, 1A	SOD-123S	7d	1a	Chm
U15	-	USM15SPT	Si-diode	Rectifer, S-fast, 400V, 1A	SOD-123S	7d	1a	Chm
U16	-	USM16SPT	Si-diode	Rectifer, S-fast, 600V, 1A	SOD-123S	7d	1a	Chm
U17	-	SMTPA120	TVS	Vrwm=120V, 50A(1ms), 5W, Bidir.	DO-214AA	1ba	1r	Ste
U17	-	USM17SPT	Si-diode	Rectifer, S-fast, 800V, 1A	SOD-123S	7d	1a	Chm
U18	-	USM18SPT	Si-diode	Rectifer, S-fast, 1000V, 1A	SOD-123S	7d	1a	Chm
U19	-	SMTPA130	TVS	Vrwm=130V, 50A(1ms), 5W, Bidir.	DO-214AA	1ba	1r	Ste
U1A	-	MURS105	Si-diode	U-fast Rectifier, 50V, 1A, Vf<0.71V(1A), 25ns	DO-214AC	1d	1a	Ons
U1B	-	MURS110	Si-diode	U-fast Rectifier, 100V, 1A, Vf<0.71V(1A), 25ns	DO-214AC	1d	1a	Ons
U1C	-	MURS115	Si-diode	U-fast Rectifier, 150V, 1A, Vf<0.71V(1A), 25ns	DO-214AC	1d	1a	Ons
U1D	-	MURS120	Si-diode	U-fast Rectifier, 200V, 1A, Vf<0.87V(1A), 25ns	DO-214AC	1d	1a	Mot
U1D	-	SMAU1D	Si-diode	U-fast Recovery, 200V, 1A, Vf<0.98V(1A), <50ns	DO-214AC	1d	1a	Kec
U1G	-	MURS140	Si-diode	U-fast Rectifier, 400V, 1A, Vf<1.25V(1A), 50ns	DO-214AC	1d	1a	Ons
U1G	-	SMAU1G	Si-diode	U-fast Recovery, 400V, 1A, Vf<1.3V(1A), <50ns	DO-214AC	1d	1a	Kec
U1GB	-	MURS140	Si-diode	U-fast Rectifier, 283V, 1A, Vf<1.25V(1A), 50ns	DO-214AA	1d	1a	Di
U1J	-	MURS160	Si-diode	U-fast Rectifier, 600V, 1A, Vf<1.25V(1A), 50ns	DO-214AC	1d	1a	Mot
U1J	-	SMAU1J	Si-diode	U-fast Recovery, 600V, 1A, Vf<1.7V(1A), <75ns	DO-214AC	1d	1a	Kec
U1JB	-	MURS160	Si-diode	U-fast Rectifier, 424V, 1A, Vf<1.25V(1A), 50ns	DO-214AA	1d	1a	Di
U2	-	BZX84J-C27	Zener diode	27V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
U2	-	CZRER2V4B	Zener diode	2.34..2.46V, Zzt=100Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
U2	-	CZRF2V4B	Zener diode	2.34..2.46V, Izt=5mA, Zzt=100Ω, 200mW	1005	70d	2d	Cmc
U2	-	CZRFR2V4B-HF	Zener diode	2.34..2.46V, Zzt=100Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
U2	-	CZRQR2V4B	Zener diode	2.34..2.46V, Izt=5mA, Zzt=100Ω, 125mW	0402	70d	2b	Cmc
U2	-	CZRU2V4B	Zener diode	2.34..2.46V, Izt=5mA, Zzt=100Ω, 150mW	0603	70d	2b	Cmc
U2	-	CZRUR2V4B-HF	Zener diode	2.34..2.46V, Zzt=100Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
U2	-	FES1B	Si-diode	U-fast Recovery, 100V, 1A, Vf<0.95V(1A), <50ns	DO-214AC	1d	2j	Fag
U2	-	GDZ5V6B-V-G	Zener diode	5.49..5.73V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	2m	Vs
U2	-	MMSZ4V3T	Zener diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1u	Mot
U20A	-	UGF20A	Si-diode	U-fast Rec. Rect., 50V, 2A, Vf<0.95V(2A), 35ns	DO-214AA	1d	1b	Zow
U20B	-	UGF20B	Si-diode	U-fast Rec. Rect., 100V, 2A, Vf<0.95V(2A), 35ns	DO-214AA	1d	1b	Zow
U20D	-	UGF20D	Si-diode	U-fast Rec. Rect., 200V, 2A, Vf<0.95V(2A), 35ns	DO-214AA	1d	1b	Zow
U20G	-	UGF20G	Si-diode	U-fast Rec. Rect., 400V, 2A, Vf<1.25V(2A), 35ns	DO-214AA	1d	1b	Zow
U20J	-	UGF20J	Si-diode	U-fast Rec. Rect., 600V, 2A, Vf<1.7V(2A), 35ns	DO-214AA	1d	1b	Zow
U20K	-	UGF20K	Si-diode	U-fast Rec. Rect., 800V, 2A, Vf<2.2V(2A), 35ns	DO-214AA	1d	1b	Zow
U25	-	SMTPA180	TVS	Vrwm=180V, 50A(1ms), 5W, Bidir.	DO-214AA	1ba	1r	Ste
U27	-	SMTPA200	TVS	Vrwm=200V, 50A(1ms), 5W, Bidir.	DO-214AA	1ba	1r	Ste
U2D	-	MURS220	Si-diode	U-fast Rectifier, 200V, 2A, Vf<0.95V(2A), 35ns	DO-214AA	1d	1a	Ons
U2D	-	SMAU2D	Si-diode	U-fast Recovery, 200V, 2A, Vf<0.98V(2A), <50ns	DO-214AC	1d	1a	Kec
U2F	-	MURS230	Si-diode	U-fast Rectifier, 300V, 2A, Vf<1.3V(2A), 65ns	DO-214AA	1d	1a	Ons
U2G	-	MURS240	Si-diode	U-fast Rectifier, 400V, 2A, Vf<1.3V(2A), 65ns	DO-214AA	1d	1a	Ons
U2G	-	SMAU2G	Si-diode	U-fast Recovery, 400V, 2A, Vf<1.3V(2A), <50ns	DO-214AC	1d	1a	Kec
U2J	-	MURS260	Si-diode	U-fast Rectifier, 600V, 2A, Vf<1.45V(2A), 75ns	DO-214AA	1d	1a	Ons
U2J	-	SMAU2J	Si-diode	U-fast Recovery, 600V, 2A, Vf<1.7V(2A), <75ns	DO-214AC	1d	1a	Kec
U3	-	BZX84J-C2V4	Zener diode	2.4V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
U3	-	CZRER2V7B	Zener diode	2.63..2.77V, Zzt=100Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
U3	-	CZRF2V7B	Zener diode	2.63..2.77V, Izt=5mA, Zzt=100Ω, 200mW	1005	70d	2d	Cmc
U3	-	CZRFR2V7B-HF	Zener diode	2.63..2.77V, Zzt=100Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
U3	-	CZRQR2V7B	Zener diode	2.63..2.77V, Izt=5mA, Zzt=100Ω, 125mW	0402	70d	2b	Cmc
U3	-	CZRU2V7B	Zener diode	2.63..2.77V, Izt=5mA, Zzt=100Ω, 150mW	0603	70d	2b	Cmc
U3	-	CZRUR2V7B-HF	Zener diode	2.63..2.77V, Zzt=100Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
U3	-	FES1D	Si-diode	U-fast Recovery, 200V, 1A, Vf<0.95V(1A), <50ns	DO-214AC	1d	2j	Fag
U3	-	GDZ6V2B-V-G	Zener diode	6.06..6.33V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	2m	Vs
U3	-	MMSZ4V7T	Zener diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1u	Mot
U30A	-	UGF30A	Si-diode	U-fast Rec. Rect., 50V, 3A, Vf<0.95V(3A), 35ns	DO-214AA	1d	1b	Zow
U30B	-	UGF30B	Si-diode	U-fast Rec. Rect., 100V, 3A, Vf<0.95V(3A), 35ns	DO-214AA	1d	1b	Zow
U30D	-	UGF30D	Si-diode	U-fast Rec. Rect., 200V, 3A, Vf<0.95V(3A), 35ns	DO-214AA	1d	1b	Zow
U30G	-	UGF30G	Si-diode	U-fast Rec. Rect., 400V, 3A, Vf<1.25V(3A), 35ns	DO-214AA	1d	1b	Zow
U30J	-	UGF30J	Si-diode	U-fast Rec. Rect., 600V, 3A, Vf<1.7V(3A), 35ns	DO-214AA	1d	1b	Zow
U30K	-	UGF30K	Si-diode	U-fast Rec. Rect., 800V, 3A, Vf<2.2V(3A), 35ns	DO-214AA	1d	1b	Zow
U31	-	SMTPA220	TVS	Vrwm=220V, 50A(1ms), 5W, Bidir.	DO-214AA	1ba	1r	Ste
U35	-	SMTPA240	TVS	Vrwm=240V, 50A(1ms), 5W, Bidir.	DO-214AA	1ba	1r	Ste
U39	-	SMTPA270	TVS	Vrwm=270V, 50A(1ms), 5W, Bidir.	DO-214AA	1ba	1r	Ste
U3A	-	MURS305-LFR	Si-diode	Ultra-fast Rectifier, 50V, 3A, Vf<0.875V(3A), 25ns	DO-214AA	1d	1a	Fre
U3B	-	MURS310-LFR	Si-diode	Ultra-fast Rectifier, 100V, 3A, Vf<0.875V(3A), 25ns	DO-214AA	1d	1a	Fre
U3C	-	MURS315-LFR	Si-diode	Ultra-fast Rectifier, 150V, 3A, Vf<0.875V(3A), 25ns	DO-214AA	1d	1a	Fre
U3D	-	MURS320	Si-diode	U-fast Rectifier, 200V, 3A, Vf<0.87V(3A), 25ns	DO-214AC	1d	1h	Ons
U3D	-	MURS320-LFR	Si-diode	Ultra-fast Rectifier, 200V, 3A, Vf<0.875V(3A), 25ns	DO-214AA	1d	1a	Fre
U3G	-	MURS340	Si-diode	U-fast Rectifier, 400V, 3A, Vf<1.25V(3A), 75ns	DO-214AC	1d	1h	Ons

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
U3G	-	MURS340-LFR	Si-diode	Ultra-fast Rectifier, 400V, 3A, Vf<1.25V(3A), 50ns	DO-214AA	1d	1a	Fre
U3J	-	MURS360	Si-diode	U-fast Rectifier, 600V, 3A, Vf<1.25V(3A), 75ns	DO-214AC	1d	1h	Ons
U3J	-	MURS360-LFR	Si-diode	Ultra-fast Rectifier, 600V, 3A, Vf<1.25V(3A), 50ns	DO-214AA	1d	1a	Fre
U4	-	BZX84J-C2V7	Zener diode	2.7V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
U4	-	CZRER3V0B	Zener diode	2.93..3.08V, Zzt=95Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
U4	-	CZRF3V0B	Zener diode	2.93..3.08V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2d	Cmc
U4	-	CZRFR3V0B-HF	Zener diode	2.93..3.08V, Zzt=95Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
U4	-	CZRQR3V0B	Zener diode	2.93..3.08V, Izt=5mA, Zzt=95Ω, 125mW	0402	70d	2b	Cmc
U4	-	CZRU3V0B	Zener diode	2.93..3.08V, Izt=5mA, Zzt=95Ω, 150mW	0603	70d	2b	Cmc
U4	-	CZRUR3V0B-HF	Zener diode	2.93..3.08V, Zzt=95Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
U4	-	FES1F	Si-diode	U-fast Recovery, 300V, 1A, Vf<1.25V(1A), <50ns	DO-214AC	1d	2j	Fag
U4	-	GDZ6V8B-V-G	Zener diode	6.65..6.93V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	2m	Vs
U4	-	MMSZ5V1T	Zener diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 500mW	SOD-123	5d	1u	Mot
U4A	-	MURA105	Si-diode	Schottky, U-fast Rectifier, 50V, 1A, Vf<0.66V(1A), <30ns	DO-214AC	1d	1f	Ons
U4B	-	MURA110	Si-diode	Schottky, U-fast Rectifier, 100V, 1A, Vf<0.66V(1A), <30ns	DO-214AC	1d	1f	Ons
U4C	-	MURA115	Si-diode	Schottky, U-fast Rectifier, 150V, 1A, Vf<0.71V(1A), <35ns	DO-214AC	1d	1f	Ons
U4D	-	MURA120	Si-diode	Schottky, U-fast Rectifier, 200V, 1A, Vf<0.71V(1A), <35ns	DO-214AC	1d	1f	Ons
U4F	-	MURA130	Si-diode	Schottky, U-fast Rectifier, 300V, 1A, Vf<0.8V(1A), <65ns	DO-214AC	1d	1f	Ons
U4G	-	MURA140	Si-diode	Schottky, U-fast Rectifier, 400V, 1A, Vf<0.8V(1A), <65ns	DO-214AC	1d	1f	Ons
U4J	-	MURA160	Si-diode	Schottky, U-fast Rectifier, 600V, 1A, Vf<1.05V(1A), <75ns	DO-214AC	1d	1f	Ons
U5	-	BZX584B33V	Zener diode	32.34..33.66V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523FL	7d	1a	Tac
U5	-	BZX84J-C30	Zener diode	30V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
U5	-	CZRER3V3B	Zener diode	3.22..3.38V, Zzt=95Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
U5	-	CZRF3V3B	Zener diode	3.22..3.38V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2d	Cmc
U5	-	CZRFR3V3B-HF	Zener diode	3.22..3.38V, Zzt=95Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
U5	-	CZRQR3V3B	Zener diode	3.22..3.38V, Izt=5mA, Zzt=95Ω, 125mW	0402	70d	2b	Cmc
U5	-	CZRU3V3B	Zener diode	3.22..3.38V, Izt=5mA, Zzt=95Ω, 150mW	0603	70d	2b	Cmc
U5	-	CZRUR3V3B-HF	Zener diode	3.22..3.38V, Zzt=95Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
U5	-	FES1G	Si-diode	U-fast Recovery, 400V, 1A, Vf<1.25V(1A), <50ns	DO-214AC	1d	2j	Fag
U5	-	GDZ7V5B-V-G	Zener diode	7.28..7.6V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	2m	Vs
U5	-	MM5Z33VB	Zener diode	32.34..33.66V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523FL	7d	1a	Tac
U5	-	MMSZ5V6T	Zener diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1u	Mot
U5A	-	MURA205	Si-diode	Schottky, U-fast Rectifier, 50V, 1A, Vf<0.94V(2A), <30ns	DO-214AC	1d	1f	Ons
U5B	-	MURA210	Si-diode	Schottky, U-fast Rectifier, 100V, 1A, Vf<0.94V(2A), <30ns	DO-214AC	1d	1f	Ons
U5C	-	MURA215	Si-diode	Schottky, U-fast Rectifier, 150V, 1A, Vf<0.95V(2A), <35ns	DO-214AC	1d	1f	Ons
U5D	-	MURA220	Si-diode	Schottky, U-fast Rectifier, 200V, 1A, Vf<0.95V(2A), <35ns	DO-214AC	1d	1f	Ons
U5F	-	MURA230	Si-diode	Schottky, U-fast Rectifier, 300V, 1A, Vf<1.3V(2A), <65ns	DO-214AC	1d	1f	Ons
U5G	-	MURA240	Si-diode	Schottky, U-fast Rectifier, 400V, 1A, Vf<1.3V(2A), <65ns	DO-214AC	1d	1f	Ons
U5J	-	MURA260	Si-diode	Schottky, U-fast Rectifier, 600V, 1A, Vf<1.45V(2A), <75ns	DO-214AC	1d	1f	Ons
U6	-	BZX84J-C33	Zener diode	33V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
U6	-	CZRER3V6B	Zener diode	3.51..3.69V, Zzt=90Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
U6	-	CZRF3V6B	Zener diode	3.51..3.69V, Izt=5mA, Zzt=90Ω, 200mW	1005	70d	2d	Cmc
U6	-	CZRFR3V6B-HF	Zener diode	3.51..3.69V, Zzt=90Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
U6	-	CZRQR3V6B	Zener diode	3.51..3.69V, Izt=5mA, Zzt=90Ω, 125mW	0402	70d	2b	Cmc
U6	-	CZRU3V6B	Zener diode	3.51..3.69V, Izt=5mA, Zzt=90Ω, 150mW	0603	70d	2b	Cmc
U6	-	CZRUR3V6B-HF	Zener diode	3.51..3.69V, Zzt=90Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
U6	-	FES1J	Si-diode	U-fast Recovery, 600V, 1A, Vf<1.25V(1A), <50ns	DO-214AC	1d	2j	Fag
U6	-	GDZ8V2B-V-G	Zener diode	8.02..8.36V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	2m	Vs
U60	-	USB260	Si-diode	Rectifier, 600V, 2A, Vf<1.6V(2A)	DO-214AA	1d	1k	Vs
U7	-	BZX84J-C36	Zener diode	36V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
U7	-	CZRER3V9B	Zener diode	3.80..4.0V, Zzt=90Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
U7	-	CZRF3V9B	Zener diode	3.80..4.0V, Izt=5mA, Zzt=90Ω, 200mW	1005	70d	2d	Cmc
U7	-	CZRFR3V9B-HF	Zener diode	3.80..4.0V, Zzt=90Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
U7	-	CZRQR3V9B	Zener diode	3.80..4.0V, Izt=5mA, Zzt=90Ω, 125mW	0402	70d	2b	Cmc
U7	-	CZRU3V9B	Zener diode	3.80..4.0V, Izt=5mA, Zzt=90Ω, 150mW	0603	70d	2b	Cmc
U7	-	CZRUR3V9B-HF	Zener diode	3.80..4.0V, Zzt=90Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
U7	-	GDZ9V1B-V-G	Zener diode	8.85..9.23V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	2m	Vs
U8	-	BZT52C18WT	Zener diode	17.10..18.90V, Izt=5mA, Zzt=45Ω, 200mW	SOD-523	6d	1a	Ttr
U8	-	BZX84J-C39	Zener diode	39V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
U8	-	CZRER4V3B	Zener diode	4.19..4.41V, Zzt=88Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
U8	-	CZRF4V3B	Zener diode	4.19..4.41V, Izt=5mA, Zzt=88Ω, 200mW	1005	70d	2d	Cmc
U8	-	CZRFR4V3B-HF	Zener diode	4.19..4.41V, Zzt=88Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
U8	-	CZRQR4V3B	Zener diode	4.19..4.41V, Izt=5mA, Zzt=88Ω, 125mW	0402	70d	2b	Cmc
U8	-	CZRU4V3B	Zener diode	4.19..4.41V, Izt=5mA, Zzt=88Ω, 150mW	0603	70d	2b	Cmc
U8	-	CZRUR4V3B-HF	Zener diode	4.19..4.41V, Zzt=88Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
U8	-	FES1M	Si-diode	U-fast Recovery, 1000V, 1A, Vf<1.5V(1A), <120ns	DO-214AC	1d	2j	Fag
U8	-	GDZ10B-V-G	Zener diode	9.77..10.21V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	2m	Vs
U8	-	MM5Z18H	Zener diode	16.8..19.1V, Izt=2mA, Zzt=45Ω, 200mW	SOD-523	6d	1a	Zow
U8	-	MM5Z18V	Zener diode	18V±5%, Izt=5mA, Zzt=45Ω, 200mW	SOD-523	6d	1a	Eic
U9	-	BZX84J-C3V0	Zener diode	3.0V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
U9	-	CZRER4V7B	Zener diode	4.58..4.82V, Zzt=70Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
U9	-	CZRF4V7B	Zener diode	4.58..4.82V, Izt=5mA, Zzt=70Ω, 200mW	1005	70d	2d	Cmc
U9	-	CZRFR4V7B-HF	Zener diode	4.58..4.82V, Zzt=70Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
U9	-	CZRQR4V7B	Zener diode	4.58..4.82V, Izt=5mA, Zzt=70Ω, 125mW	0402	70d	2b	Cmc
U9	-	CZRU4V7B	Zener diode	4.58..4.82V, Izt=5mA, Zzt=70Ω, 150mW	0603	70d	2b	Cmc
U9	-	CZRUR4V7B-HF	Zener diode	4.58..4.82V, Zzt=70Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
U9	-	GDZ11B-V-G	Zener diode	10.76..11.22V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	2m	Vs
UA	-	BZX84J-C3V3	Zener diode	3.3V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UA	-	CZRER5V1B	Zener diode	4.97..5.232V, Zzt=50Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UA	-	CZRF5V1B	Zener diode	4.97..5.23V, Izt=5mA, Zzt=50Ω, 200mW	1005	70d	2d	Cmc
UA	-	CZRFR5V1B-HF	Zener diode	4.97..5.23V, Zzt=50Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UA	-	CZRQR5V1B	Zener diode	4.97..5.23V, Izt=5mA, Zzt=50Ω, 125mW	0402	70d	2b	Cmc
UA	-	CZRU5V1B	Zener diode	4.97..5.23V, Izt=5mA, Zzt=50Ω, 150mW	0603	70d	2b	Cmc
UA	-	CZRUR5V1B-HF	Zener diode	4.97..5.23V, Zzt=50Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UA	-	FUES1A	Si-diode	U-fast Rec. Rect., 50V, 1A, <25ns	DO-214AC	1d	2j	Fag
UA	-	GDZ12B-V-G	Zener diode	11.74..12.24V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	2m	Vs
UA	-	KDV154	C-diode	VCO for UHF-Band, 20V, 13.9..4.5pF(6..2V)	USC	5d	1a	Kec
UA	-	KDV154E	C-diode	VCO for UHF-Band, 20V, 13.9..4.5pF(6..2V)	ESC	6d	1a	Kec
UA	-	US1A	Si-diode	Rectifier, 500V, 1A, Vf<1.0V(1A), 75ns, 15pF	DO-214AC	1d	1k	Vs
UAA	-	1.5SMC6V8	TVS	Vrwm=5.5V, Vbr=6.12..7.48V, Ipp=139A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAB	-	1.5SMC6V8A	TVS	Vrwm=5.8V, Vbr=6.45..7.14 V, Ipp=143A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAC	-	1.5SMC7V5	TVS	Vrwm=6.05V, Vbr=6.75..8.25V, Ipp=128A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAD	-	1.5SMC7V5A	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, Ipp=132A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAE	-	1.5SMC8V2	TVS	Vrwm=6.63V, Vbr=7.38..9.02V, Ipp=120A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAF	-	1.5SMC8V2A	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, Ipp=124A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAG	-	1.5SMC9V1	TVS	Vrwm=7.37V, Vbr=8.19..10V, Ipp=109A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAH	-	1.5SMC9V1A	TVS	Vrwm=7.78V, Vbr=8.65..9.5V, Ipp=112A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAK	-	1.5SMC10	TVS	Vrwm=8.1V, Vbr=9..11V, Ipp=100A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAL	-	1.5SMC10A	TVS	Vrwm=8.55V, Vbr=9.5..10.5V, Ipp=103A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAM	-	1.5SMC11	TVS	Vrwm=8.92V, Vbr=9.9..12.1V, Ipp=93A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAN	-	1.5SMC11A	TVS	Vrwm=9.4V, Vbr=10.5..11.6V, Ipp=96A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAP	-	1.5SMC12	TVS	Vrwm=9.72V, Vbr=10.8..13.2V, Ipp=87A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAR	-	1.5SMC12A	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, Ipp=90A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAS	-	1.5SMC13	TVS	Vrwm=10.5V, Vbr=11.7..14.3V, Ipp=79A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAT	-	1.5SMC13A	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, Ipp=82A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAU	-	1.5SMC15	TVS	Vrwm=12.1V, Vbr=13.5..16.5V, Ipp=68A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAV	-	1.5SMC15A	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, Ipp=71A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAW	-	1.5SMC16	TVS	Vrwm=12.9V, Vbr=14.4..17.6V, Ipp=64A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAX	-	1.5SMC16A	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, Ipp=67A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAY	-	1.5SMC18	TVS	Vrwm=14.5V, Vbr=16.2..19.8V, Ipp=56.5A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UAZ	-	1.5SMC18A	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, Ipp=59.5A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UB	-	BZT52C4V3	Zener diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1d	Di
UB	-	BZX84J-C3V6	Zener diode	3.6V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UB	-	CZRER5V6B	Zener diode	5.46..5.742V, Zzt=25Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UB	-	CZRF5V6B	Zener diode	5.46..5.74V, Izt=5mA, Zzt=25Ω, 200mW	1005	70d	2d	Cmc
UB	-	CZRFR5V6B-HF	Zener diode	5.46..5.74V, Zzt=25Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UB	-	CZRQR5V6B	Zener diode	5.46..5.74V, Izt=5mA, Zzt=25Ω, 125mW	0402	70d	2b	Cmc
UB	-	CZRU5V6B	Zener diode	5.46..5.74V, Izt=5mA, Zzt=25Ω, 150mW	0603	70d	2b	Cmc
UB	-	CZRUR5V6B-HF	Zener diode	5.46..5.74V, Zzt=25Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UB	-	FUES1B	Si-diode	U-fast Rec. Rect., 100V, 1A, <25ns	DO-214AC	1d	2j	Fag
UB	-	GDZ13B-V-G	Zener diode	12.91..13.49V, Izt=5mA, Zzt=37Ω, 200mW	SOD-323	5d	2m	Vs
UB	-	KDZ11B	Zener diode	11V±2.5%, 20mA, 1W	PMDU	7d	1s	Rhm
UB	-	US1B	Si-diode	Rectifier, 100V, 1A, Vf<1.0V(1A) 75ns, 15pF	DO-214AC	1d	1k	Vs
UB11	-	UBM11PT	Si-diode	Rectifer, S-fast, 50V, 1A	DO-214AC	1d	1a	Chm
UB12	-	UBM12PT	Si-diode	Rectifer, S-fast, 100V, 1A	DO-214AC	1d	1a	Chm
UB13	-	UBM13PT	Si-diode	Rectifer, S-fast, 200V, 1A	DO-214AC	1d	1a	Chm
UB14	-	UBM14PT	Si-diode	Rectifer, S-fast, 300V, 1A	DO-214AC	1d	1a	Chm
UB15	-	UBM15PT	Si-diode	Rectifer, S-fast, 400V, 1A	DO-214AC	1d	1a	Chm
UB16	-	UBM16PT	Si-diode	Rectifer, S-fast, 600V, 1A	DO-214AC	1d	1a	Chm
UB17	-	UBM17PT	Si-diode	Rectifer, S-fast, 800V, 1A	DO-214AC	1d	1a	Chm
UB18	-	UBM18PT	Si-diode	Rectifer, S-fast, 1000V, 1A	DO-214AC	1d	1a	Chm
UB21	-	UBM21PT	Si-diode	Rectifer, S-fast, 50V, 2A	DO-214AA	1d	1a	Chm
UB22	-	UBM22PT	Si-diode	Rectifer, S-fast, 100V, 2A	DO-214AA	1d	1a	Chm
UB23	-	UBM23PT	Si-diode	Rectifer, S-fast, 200V, 2A	DO-214AA	1d	1a	Chm
UB24	-	UBM24PT	Si-diode	Rectifer, S-fast, 300V, 2A	DO-214AA	1d	1a	Chm
UB25	-	UBM25PT	Si-diode	Rectifer, S-fast, 400V, 2A	DO-214AA	1d	1a	Chm
UB26	-	UBM26PT	Si-diode	Rectifer, S-fast, 600V, 2A	DO-214AA	1d	1a	Chm
UB27	-	UBM27PT	Si-diode	Rectifer, S-fast, 800V, 2A	DO-214AA	1d	1a	Chm
UB28	-	UBM28PT	Si-diode	Rectifer, S-fast, 1000V, 2A	DO-214AA	1d	1a	Chm
UB31	-	UBM31PT	Si-diode	Rectifer, S-fast, 50V, 3A	DO-214AA	1d	1a	Chm



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
UB32	-	UBM32PT	Si-diode	Rectifer, S-fast, 100V, 3A	DO-214AA	1d	1a	Chm
UB33	-	UBM33PT	Si-diode	Rectifer, S-fast, 200V, 3A	DO-214AA	1d	1a	Chm
UB34	-	UBM34PT	Si-diode	Rectifer, S-fast, 300V, 3A	DO-214AA	1d	1a	Chm
UB35	-	UBM35PT	Si-diode	Rectifer, S-fast, 400V, 3A	DO-214AA	1d	1a	Chm
UB36	-	UBM36PT	Si-diode	Rectifer, S-fast, 600V, 3A	DO-214AA	1d	1a	Chm
UB37	-	UBM37PT	Si-diode	Rectifer, S-fast, 800V, 3A	DO-214AA	1d	1a	Chm
UB38	-	UBM38PT	Si-diode	Rectifer, S-fast, 1000V, 3A	DO-214AA	1d	1a	Chm
UBA	-	1.5SMC20	TVS	Vrwm=16.2V, Vbr=18..22V, Ipp=51.5A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBB	-	1.5SMC20A	TVS	Vrwm=17.1V, Vbr=19..21V, Ipp=54A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBC	-	1.5SMC22	TVS	Vrwm=17.8V, Vbr=19.8..24.2V, Ipp=47A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBD	-	1.5SMC22A	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, Ipp=49A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBE	-	1.5SMC24	TVS	Vrwm=19.4V, Vbr=21.6..26.4V, Ipp=43A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBF	-	1.5SMC24A	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, Ipp=45A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBG	-	1.5SMC27	TVS	Vrwm=21.8V, Vbr=24.3..29.7V, Ipp=38.5A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBH	-	1.5SMC27A	TVS	Vrwm=23.1V, Vbr=25.7..28.4 V, Ipp=40A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBK	-	1.5SMC30	TVS	Vrwm=24.3V, Vbr=27..33V, Ipp=34.5A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBL	-	1.5SMC30A	TVS	Vrwm=25.6V, Vbr=28.5..31.5V, Ipp=36A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBM	-	1.5SMC33	TVS	Vrwm=26.8V, Vbr=29.7..36.3V, Ipp=31.5A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBN	-	1.5SMC33A	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, Ipp=33A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBP	-	1.5SMC36	TVS	Vrwm=29.1V, Vbr=32.4..39.6V, Ipp=29A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBR	-	1.5SMC36A	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, Ipp=30A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBS	-	1.5SMC39	TVS	Vrwm=31.6V, Vbr=35.1..42.9V, Ipp=26.5A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBT	-	1.5SMC39A	TVS	Vrwm=33.3V, Vbr=37.1..41V, Ipp=28A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBU	-	1.5SMC43	TVS	Vrwm=34.8V, Vbr=38.7..47.3V, Ipp=24A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBV	-	1.5SMC43A	TVS	Vrwm=36.8V, Vbr=40.9..45.2V, Ipp=25.3A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBW	-	1.5SMC47	TVS	Vrwm=38.1V, Vbr=42.3..51.7V, Ipp=22.2A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBX	-	1.5SMC47A	TVS	Vrwm=40.2V, Vbr=44.7..49.4V, Ipp=23.2A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBY	-	1.5SMC51	TVS	Vrwm=41.3V, Vbr=45.9..56.1V, Ipp=20.4A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UBZ	-	1.5SMC51A	TVS	Vrwm=43.6V, Vbr=48.5..53.6V, Ipp=21.4A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UC	-	BZX84J-C3V9	Zener diode	3.9V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UC	-	CZRER6V2B	Zener diode	6.05 6.362V, Zzt=10Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UC	-	CZRF6V2B	Zener diode	6.05..6.36V, Izt=5mA, Zzt=10Ω, 200mW	1005	70d	2d	Cmc
UC	-	CZRFR6V2B-HF	Zener diode	6.05..6.36V, Zzt=10Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UC	-	CZRQR6V2B	Zener diode	6.05..6.36V, Izt=5mA, Zzt=10Ω, 125mW	0402	70d	2b	Cmc
UC	-	CZRU6V2B	Zener diode	6.05..6.36V, Izt=5mA, Zzt=10Ω, 150mW	0603	70d	2b	Cmc
UC	-	CZRUR6V2B-HF	Zener diode	6.05..6.36V, Zzt=10Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UC	-	GDZ15B-V-G	Zener diode	14.34..14.98V, Izt=5mA, Zzt=42Ω, 200mW	SOD-323	5d	2m	Vs
UC31	-	UCM31PT	Si-diode	Rectifer, S-fast, 50V, 3A	DO-214AB	1d	1a	Chm
UC32	-	UCM32PT	Si-diode	Rectifer, S-fast, 100V, 3A	DO-214AB	1d	1a	Chm
UC33	-	UCM33PT	Si-diode	Rectifer, S-fast, 200V, 3A	DO-214AB	1d	1a	Chm
UC34	-	UCM34PT	Si-diode	Rectifer, S-fast, 300V, 3A	DO-214AB	1d	1a	Chm
UC35	-	UCM35PT	Si-diode	Rectifer, S-fast, 400V, 3A	DO-214AB	1d	1a	Chm
UC36	-	UCM36PT	Si-diode	Rectifer, S-fast, 600V, 3A	DO-214AB	1d	1a	Chm
UC37	-	UCM37PT	Si-diode	Rectifer, S-fast, 800V, 3A	DO-214AB	1d	1a	Chm
UC38	-	UCM38PT	Si-diode	Rectifer, S-fast, 1000V, 3A	DO-214AB	1d	1a	Chm
UCA	-	1.5SMC56	TVS	Vrwm=45.6V, Vbr=50.4..61.6V, Ipp=18.6A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCB	-	1.5SMC56A	TVS	Vrwm=47.8V, Vbr=53.2..58.8V, Ipp=19.5A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCC	-	1.5SMC62	TVS	Vrwm=50.2V, Vbr=55.8..68.2V, Ipp=16.9A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCD	-	1.5SMC62A	TVS	Vrwm=53V, Vbr=58.9..65.1V, Ipp=17.7A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCE	-	1.5SMC68	TVS	Vrwm=55.1V, Vbr=61.2..74.8V, Ipp=15.3A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCF	-	1.5SMC68A	TVS	Vrwm=58.1V, Vbr=64.6..71.4V, Ipp=16.3A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCG	-	1.5SMC75	TVS	Vrwm=60.7V, Vbr=67.5..82.5V, Ipp=13.9A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCH	-	1.5SMC75A	TVS	Vrwm=64.1V, Vbr=71.3..78.8V, Ipp=14.6A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCK	-	1.5SMC82	TVS	Vrwm=66.4V, Vbr=73.8..90.2V, Ipp=12.7A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCL	-	1.5SMC82A	TVS	Vrwm=70.1V, Vbr=77.9..86.1V, Ipp=13.3A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCM	-	1.5SMC91	TVS	Vrwm=73.7V, Vbr=81.9..100V, Ipp=11.4A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCN	-	1.5SMC91A	TVS	Vrwm=77.8V, Vbr=86.5..95.5V, Ipp=12A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCP	-	1.5SMC100	TVS	Vrwm=81V, Vbr=90..110V, Ipp=10.4A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCR	-	1.5SMC100A	TVS	Vrwm=85.5V, Vbr=95..105V, Ipp=11A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCS	-	1.5SMC110	TVS	Vrwm=89.2V, Vbr=99..121V, Ipp=9.5A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCT	-	1.5SMC110A	TVS	Vrwm=94V, Vbr=105..116V, Ipp=9.9A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCU	-	1.5SMC120	TVS	Vrwm=97.2V, Vbr=108..132V, Ipp=8.7A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCV	-	1.5SMC120A	TVS	Vrwm=102V, Vbr=114..126V, Ipp=9.1A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCW	-	1.5SMC130	TVS	Vrwm=105V, Vbr=117..143V, Ipp=8A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCX	-	1.5SMC130A	TVS	Vrwm=111V, Vbr=124..137V, Ipp=8.4A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCY	-	1.5SMC150	TVS	Vrwm=121V, Vbr=135..165V, Ipp=7A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UCZ	-	1.5SMC150A	TVS	Vrwm=128V, Vbr=143..158V, Ipp=7.2A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UD	-	BZX84J-C43	Zener diode	43V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UD	-	FUES1D	Si-diode	U-fast Rec. Rect., 200V, 1A, <25ns	DO-214AC	1d	2j	Fag
UD	-	GDZ16B-V-G	Zener diode	15.85..16.51V, Izt=5mA, Zzt=50Ω, 200mW	SOD-323	5d	2m	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
UD	-	KDS114	Si-diode	Band-Switch, 30V, 100mA, Vf<0.85V(2mA), 100MHz	USC	5d	1a	Kec
UD	-	KDS114E	Si-diode	Band-Switch, 30V, 100mA, Vf<0.85V(2mA), 100MHz	ESC	6d	1a	Kec
UD	-	KDV175	Si-diode	VHF/UHF-Band Att, 50V, 50mA, Vf<0.95V(50mA), 100MHz	USC	5d	1a	Kec
UD	-	KDV175E	Si-diode	VHF/UHF-Band Att, 50V, 50mA, Vf<0.95V(50mA), 100MHz	ESC	6d	1a	Kec
UD	-	P4SMAJ12C	TVS	Vrwm=12V, 18.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
UD	-	SM4T18C	TVS	Vrwm=18V, 16A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
UD	-	US1D	Si-diode	Rectifier, 200V, 1A, Vf<1.0V(1A) 75ns, 15pF	DO-214AC	1d	1k	Vs
UDA	-	1.5SMC160	TVS	Vrwm=130V, Vbr=144..176V, Ipp=6.5A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UDB	-	1.5SMC160A	TVS	Vrwm=136V, Vbr=152..168V, Ipp=6.8A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UDC	-	1.5SMC170	TVS	Vrwm=138V, Vbr=153..187V, Ipp=6.2A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UDD	-	1.5SMC170A	TVS	Vrwm=145V, Vbr=162..179V, Ipp=6.4A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UDE	-	1.5SMC180	TVS	Vrwm=146V, Vbr=162..198V, Ipp=5.8A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UDF	-	1.5SMC180A	TVS	Vrwm=154V, Vbr=171..189V, Ipp=6.1A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UDG	-	1.5SMC200	TVS	Vrwm=162V, Vbr=180..220V, Ipp=5.2A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UDH	-	1.5SMC200A	TVS	Vrwm=171V, Vbr=190..210V, Ipp=5.5A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UDI	-	1.5SMC250A	TVS	Vrwm=214V, Vbr=237..263V, Ipp=4.5A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UDJ	-	1.5SMC300A	TVS	Vrwm=256.0V, Vbr=256..285V, Ipp=3.7A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UDK	-	1.5SMC220	TVS	Vrwm=175V, Vbr=198..242V, Ipp=4.3A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UDL	-	1.5SMC220A	TVS	Vrwm=185V, Vbr=209..231V, Ipp=4.6A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UDQ	-	1.5SMC350A	TVS	Vrwm=300.0V, Vbr=300..332V, Ipp=3.2A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UDU	-	1.5SMC400A	TVS	Vrwm=342.0V, Vbr=342..380V, Ipp=2.8A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UDV	-	1.5SMC440A	TVS	Vrwm=376.0V, Vbr=376..418V, Ipp=2.5A, 1500W(1ms)	DO-214AB	1d	2j	Fag
UE	-	BZX84J-C47	Zener diode	47V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UE	-	CD214A-T12CA	TVS	Vrwm=12V, Irsm=20.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
UE	-	CZRER6V8B	Zener diode	6.63 6.972V, Zzt=8Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UE	-	CZRF6V8B	Zener diode	6.63..6.97V, Izt=5mA, Zzt=8Ω, 200mW	1005	70d	2d	Cmc
UE	-	CZRFR6V8B-HF	Zener diode	6.63..6.97V, Zzt=8Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UE	-	CZRQR6V8B	Zener diode	6.63..6.97V, Izt=5mA, Zzt=8Ω, 125mW	0402	70d	2b	Cmc
UE	-	CZRU6V8B	Zener diode	6.63..6.97V, Izt=5mA, Zzt=8Ω, 150mW	0603	70d	2b	Cmc
UE	-	CZRUR6V8B-HF	Zener diode	6.63..6.97V, Zzt=8Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UE	-	FUF1A	Si-diode	U-fast Rec. Rect., 50V, 1A, Vf<1.3V(1A), 50ns	DO-214AC	1d	2j	Fag
UE	-	GDZ18B-V-G	Zener diode	17.56..18.35V, Izt=5mA, Zzt=65Ω, 200mW	SOD-323	5d	2m	Vs
UE	-	P4SMAJ12CA	TVS	Vrwm=12V, 20.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
UE	-	P4SMAJ300CA	TVS	Vrwm=300V, 0.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lsr
UE	-	SM4T18CA	TVS	Vrwm=18V, 16A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
UE	-	SMA6J12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, Ipp=30.2A, 600W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
UE	-	SMAJ12CA	TVS	Vrwm=12V, Vbr=13.3..14.7V, 20.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
UE	-	SMAJ300CA	TVS	Vrwm=300V, Vbr=335..371V, 0.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
UF	-	BZX84J-C4V3	Zener diode	4.3V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UF	-	CZRER7V5B	Zener diode	7.31 7.69V, Zzt=7Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UF	-	CZRF7V5B	Zener diode	7.31..7.69V, Izt=5mA, Zzt=7Ω, 200mW	1005	70d	2d	Cmc
UF	-	CZRFR7V5B-HF	Zener diode	7.31..7.69V, Zzt=7Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UF	-	CZRQR7V5B	Zener diode	7.31..7.69V, Izt=5mA, Zzt=7Ω, 125mW	0402	70d	2b	Cmc
UF	-	CZRU7V5B	Zener diode	7.31..7.69V, Izt=5mA, Zzt=7Ω, 150mW	0603	70d	2b	Cmc
UF	-	CZRUR7V5B-HF	Zener diode	7.31..7.69V, Zzt=7Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UF	-	FUF1B	Si-diode	U-fast Rec. Rect., 100V, 1A, Vf<1.3V(1A), 50ns	DO-214AC	1d	2j	Fag
UF	-	KDS160	Si-diode	Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	USC	5d	1a	Kec
UF	-	KDS160E	Si-diode	Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	ESC	6d	1a	Kec
UF	-	KDS160V	Si-diode	Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	VSC	6d	1a	Kec
UF	-	KDZ10FV	Zener diode	9.40..10.60V, Izt=5mA, Zzt=15Ω, 100mW	TFSC	7d	1a	Kec
UF	-	MAZD240	Zener diode	22.8..25.6V, Zzt=100Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
UF	-	P4SMAJ13C	TVS	Vrwm=13V, 16.8A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
UG	-	BZX84J-C4V7	Zener diode	4.7V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UG	-	CD214A-T13CA	TVS	Vrwm=13V, Irsm=18.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
UG	-	CZRER8V2B	Zener diode	8.00 8.41V, Zzt=7Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UG	-	CZRF8V2B	Zener diode	8.0..8.41V, Izt=5mA, Zzt=7Ω, 200mW	1005	70d	2d	Cmc
UG	-	CZRFR8V2B-HF	Zener diode	8.0..8.41V, Zzt=7Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UG	-	CZRQR8V2B	Zener diode	8.0..8.41V, Izt=5mA, Zzt=7Ω, 125mW	0402	70d	2b	Cmc
UG	-	CZRU8V2B	Zener diode	8.0..8.41V, Izt=5mA, Zzt=7Ω, 150mW	0603	70d	2b	Cmc
UG	-	CZRUR8V2B-HF	Zener diode	8.0..8.41V, Zzt=7Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UG	-	FUF1D	Si-diode	U-fast Rec. Rect., 200V, 1A, Vf<1.3V(1A), 50ns	DO-214AC	1d	2j	Fag
UG	-	P4SMAJ13CA	TVS	Vrwm=13V, 18.6A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
UG	-	P4SMAJ350CA	TVS	Vrwm=350V, 0.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lsr
UG	-	SMA6J13CA	TVS	Vbr=14.4..15.9V, Vrwm=13V, Ipp=27.9A, 600W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
UG	-	SMAJ13CA	TVS	Vrwm=13V, Vbr=14.4..15.9V, 18.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
UG	-	SMAJ350CA	TVS	Vrwm=350V, Vbr=391..432V, 0.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
UG	-	US1G	Si-diode	Rectifier, 400V, 1A, Vf<1.0V(1A) 75ns, 15pF	DO-214AC	1d	1k	Vs
UH	-	BZX84J-C51	Zener diode	51V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UH	-	CZRER9V1B	Zener diode	8.87 9.33V, Zzt=10Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UH	-	CZRF9V1B	Zener diode	8.87..9.33V, Izt=5mA, Zzt=10Ω, 200mW	1005	70d	2d	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
UH	-	CZRFR9V1B-HF	Zener diode	8.87..9.33V, Zzt=10Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UH	-	CZRQR9V1B	Zener diode	8.87..9.33V, Izt=5mA, Zzt=10Ω, 125mW	0402	70d	2b	Cmc
UH	-	CZRU9V1B	Zener diode	8.87..9.33V, Izt=5mA, Zzt=10Ω, 150mW	0603	70d	2b	Cmc
UH	-	CZRUR9V1B-HF	Zener diode	8.87..9.33V, Zzt=10Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UH	-	FUF1G	Si-diode	U-fast Rec. Rect., 400V, 1A, Vf<1.3V(1A), 50ns	DO-214AC	1d	2j	Fag
UH	-	GDZ20B-V-G	Zener diode	19.52..20.39V, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	2m	Vs
UH	-	KDS4148U	Si-diode	Sw, 75V, 150mA, Vf<1.2V(100mA), 4ns	USC	5d	1a	Kec
UH	-	P4SMAJ14C	TVS	Vrwm=14V, 15.5A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
UH	-	SM4T22C	TVS	Vrwm=22V, 13A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
UI	-	FUF1J	Si-diode	U-fast Rec. Rect., 600V, 1A, Vf<1.7V(1A), 75ns	DO-214AC	1d	2j	Fag
UJ	-	CZRER10VB	Zener diode	9.75 10.25V, Zzt=15Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UJ	-	CZRF10VB	Zener diode	9.75..10.25V, Izt=5mA, Zzt=15Ω, 200mW	1005	70d	2d	Cmc
UJ	-	CZRFR10VB-HF	Zener diode	9.75..10.25V, Zzt=15Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UJ	-	CZRQR10VB	Zener diode	9.75..10.25V, Izt=5mA, Zzt=15Ω, 125mW	0402	70d	2b	Cmc
UJ	-	CZRU10VB	Zener diode	9.75..10.25V, Izt=5mA, Zzt=15Ω, 150mW	0603	70d	2b	Cmc
UJ	-	CZRUR10VB-HF	Zener diode	9.75..10.25V, Zzt=15Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UJ	-	FUF1K	Si-diode	U-fast Rec. Rect., 800V, 1A, Vf<1.7V(1A), 75ns	DO-214AC	1d	2j	Fag
UJ	-	US1J	Si-diode	Rectifier, 600V, 1A, Vf<1.7V(1A) 75ns, 15pF	DO-214AC	1d	1k	Vs
UK	-	BZX84J-C56	Zener diode	56V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UK	-	CD214A-T14CA	TVS	Vrwm=14V, Irsm=17.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
UK	-	CZRER11VB	Zener diode	10.73 11.27V, Zzt=18Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UK	-	CZRF11VB	Zener diode	10.73..11.27V, Izt=5mA, Zzt=18Ω, 200mW	1005	70d	2d	Cmc
UK	-	CZRFR11VB-HF	Zener diode	10.73..11.27V, Zzt=18Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UK	-	CZRQR11VB	Zener diode	10.73..11.27V, Izt=5mA, Zzt=18Ω, 125mW	0402	70d	2b	Cmc
UK	-	CZRU11VB	Zener diode	10.73..11.27V, Izt=5mA, Zzt=18Ω, 150mW	0603	70d	2b	Cmc
UK	-	CZRUR11VB-HF	Zener diode	10.73..11.27V, Zzt=18Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UK	-	FUF1M	Si-diode	U-fast Rec. Rect., 1000V, 1A, Vf<1.7V(1A), 75ns	DO-214AC	1d	2j	Fag
UK	-	GDZ22B-V-G	Zener diode	21.54..22.47V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	2m	Vs
UK	-	KDV350	C-diode	VCO, 15V, 15/17.5pF(1V)	USC	5d	1a	Kec
UK	-	P4SMAJ14CA	TVS	Vrwm=14V, 17.2A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
UK	-	P4SMAJ400CA	TVS	Vrwm=400V, 0.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lsr
UK	-	SM4T22CA	TVS	Vrwm=22V, 13A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
UK	-	SMA6J14CA	TVS	Vbr=15.6..17.2V, Vrwm=14V, Ipp=25.9A, 600W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
UK	-	SMAJ14CA	TVS	Vrwm=14V, Vbr=15.6..17.2V, 17.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
UK	-	SMAJ400CA	TVS	Vrwm=400V, Vbr=447..494V, 0.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
UK	-	US1K	Si-diode	Rectifier, 800V, 1A, Vf<1.7V(1A) 75ns, 15pF	DO-214AC	1d	1k	Vs
UL	-	BZX84J-C5V1	Zener diode	5.1V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UL	-	GDZ24B-V-G	Zener diode	23.72..24.78V, Izt=5mA, Zzt=120Ω, 200mW	SOD-323	5d	2m	Vs
UL	-	P4SMAJ15C	TVS	Vrwm=15V, 14.8A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
UL	-	SM4T24C	TVS	Vrwm=24V, 12A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
UM	-	BZX84J-C5V6	Zener diode	5.6V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UM	-	CD214A-T15CA	TVS	Vrwm=15V, Irsm=16.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
UM	-	CZRER12VB	Zener diode	11.70 12.30V, Zzt=22Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UM	-	CZRF12VB	Zener diode	11.70..12.30V, Izt=5mA, Zzt=22Ω, 200mW	1005	70d	2d	Cmc
UM	-	CZRFR12VB-HF	Zener diode	11.70..12.30V, Zzt=22Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UM	-	CZRQR12VB	Zener diode	11.70..12.30V, Izt=5mA, Zzt=22Ω, 125mW	0402	70d	2b	Cmc
UM	-	CZRU12VB	Zener diode	11.70..12.30V, Izt=5mA, Zzt=22Ω, 150mW	0603	70d	2b	Cmc
UM	-	CZRUR12VB-HF	Zener diode	11.70..12.30V, Zzt=22Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UM	-	GDZ27B-V-G	Zener diode	26.19..27.53V, Izt=5mA, Zzt=150Ω, 200mW	SOD-323	5d	2m	Vs
UM	-	P4SMAJ15CA	TVS	Vrwm=15V, 16.4A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
UM	-	P4SMAJ440CA	TVS	Vrwm=440V, 0.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lsr
UM	-	SM4T24CA	TVS	Vrwm=24V, 12A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
UM	-	SMA6J15CA	TVS	Vbr=16.7..18.5V, Vrwm=15V, Ipp=24.6A, 600W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
UM	-	SMAJ15CA	TVS	Vrwm=15V, Vbr=16.7..18.5V, 16.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
UM	-	SMAJ440CA	TVS	Vrwm=440V, Vbr=492..543V, 0.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
UM	-	US1M	Si-diode	Rectifier, 1000V, 1A, Vf<1.7V(1A) 75ns, 15pF	DO-214AC	1d	1k	Vs
UN	-	BZX84J-C62	Zener diode	62V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UN	-	CZRER13VB	Zener diode	12.68 13.32V, Zzt=25Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UN	-	CZRF13VB	Zener diode	12.68..13.32V, Izt=5mA, Zzt=25Ω, 200mW	1005	70d	2d	Cmc
UN	-	CZRFR13VB-HF	Zener diode	12.68..13.32V, Zzt=25Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UN	-	CZRQR13VB	Zener diode	12.68..13.32V, Izt=5mA, Zzt=25Ω, 125mW	0402	70d	2b	Cmc
UN	-	CZRU13VB	Zener diode	12.68..13.32V, Izt=5mA, Zzt=25Ω, 150mW	0603	70d	2b	Cmc
UN	-	CZRUR13VB-HF	Zener diode	12.68..13.32V, Zzt=25Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UN	-	FUF2A	Si-diode	U-fast Rec. Rect., 50V, 2A, Vf<1.3V(2A), 50ns	DO-214AA	1d	2j	Fag
UN	-	GDZ30B-V-G	Zener diode	29.19..30.69V, Izt=5mA, Zzt=200Ω, 200mW	SOD-323	5d	2m	Vs
UN	-	P4SMAJ16C	TVS	Vrwm=16V, 13.8A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
UN	-	SM4T27C	TVS	Vrwm=27V, 10.7A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
UO	-	KDV214E	C-diode	TV-tuning, 30V, 14.5..2.06pF(2..25V)	ESC	6d	1a	Kec
UP	-	BZX84J-C68	Zener diode	68V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UP	-	CD214A-T16CA	TVS	Vrwm=16V, Irsm=15.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
UP	-	CMDZ11L	Zener diode	10.45..11.55V, Izt=0.5mA, Zzt=80Ω, 250mW	SOD-323	5d	1a	Cen
UP	-	CZRER15VB	Zener diode	14.63 15.37V, Zzt=32Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UP	-	CZRF15VB	Zener diode	14.63..15.37V, Izt=5mA, Zzt=32Ω, 200mW	1005	70d	2d	Cmc
UP	-	CZRFR15VB-HF	Zener diode	14.63..15.37V, Zzt=32Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UP	-	CZRQR15VB	Zener diode	14.63..15.37V, Izt=5mA, Zzt=32Ω, 125mW	0402	70d	2b	Cmc
UP	-	CZRU15VB	Zener diode	14.63..15.37V, Izt=5mA, Zzt=32Ω, 150mW	0603	70d	2b	Cmc
UP	-	CZRUR15VB-HF	Zener diode	14.63..15.37V, Zzt=32Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UP	-	FUF2B	Si-diode	U-fast Rec. Rect., 100V, 2A, Vf<1.3V(2A), 50ns	DO-214AA	1d	2j	Fag
UP	-	GDZ33B-V-G	Zener diode	32.15..33.79V, Izt=5mA, Zzt=250Ω, 200mW	SOD-323	5d	2m	Vs
UP	-	KDZ10FVY	Zener diode	9.77..10.21V, Izt=5mA, Zzt=15Ω, 100mW	TFSC	7d	1a	Kec
UP	-	P4SMAJ16CA	TVS	Vrwm=16V, 15.3A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
UP	-	SM4T27CA	TVS	Vrwm=27V, 10.7A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
UP	-	SMA6J16CA	TVS	Vbr=17.8..19.7V, Vrwm=16V, Ipp=23.1A, 600W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
UP	-	SMAJ16CA	TVS	Vrwm=16V, Vbr=17.8..21.8V, 15.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
UQ	-	CZRER16VB	Zener diode	15.60 16.40V, Zzt=36Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UQ	-	CZRF16VB	Zener diode	15.6..16.4V, Izt=5mA, Zzt=36Ω, 200mW	1005	70d	2d	Cmc
UQ	-	CZRFR16VB-HF	Zener diode	15.60..16.40V, Zzt=36Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UQ	-	CZRQR16VB	Zener diode	15.60..16.40V, Izt=5mA, Zzt=36Ω, 125mW	0402	70d	2b	Cmc
UQ	-	CZRU16VB	Zener diode	15.60..16.40V, Izt=5mA, Zzt=36Ω, 150mW	0603	70d	2b	Cmc
UQ	-	CZRUR16VB-HF	Zener diode	15.60..16.40V, Zzt=36Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UQ	-	FUF2D	Si-diode	U-fast Rec. Rect., 200V, 2A, Vf<1.3V(2A), 50ns	DO-214AA	1d	2j	Fag
UQ	-	P4SMAJ17C	TVS	Vrwm=17V, 13.1A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
UQ	-	SM4T30C	TVS	Vrwm=30V, 9.6A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
UR	-	BZX84J-C6V2	Zener diode	6.2V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UR	-	CD214A-T17CA	TVS	Vrwm=17V, Irsm=14.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
UR	-	CZRER18VB	Zener diode	17.55 18.45V, Zzt=42Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UR	-	CZRF18VB	Zener diode	17.55..18.45V, Izt=5mA, Zzt=42Ω, 200mW	1005	70d	2d	Cmc
UR	-	CZRFR18VB-HF	Zener diode	17.55..18.45V, Zzt=42Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UR	-	CZRQR18VB	Zener diode	17.55..18.45V, Izt=5mA, Zzt=42Ω, 125mW	0402	70d	2b	Cmc
UR	-	CZRU18VB	Zener diode	17.55..18.45V, Izt=5mA, Zzt=42Ω, 150mW	0603	70d	2b	Cmc
UR	-	CZRUR18VB-HF	Zener diode	17.55..18.45V, Zzt=42Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UR	-	FUF2G	Si-diode	U-fast Rec. Rect., 400V, 2A, Vf<1.3V(2A), 50ns	DO-214AA	1d	2j	Fag
UR	-	P4SMAJ17CA	TVS	Vrwm=17V, 14.5A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
UR	-	SM4T30CA	TVS	Vrwm=30V, 9.6A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
UR	-	SMA6J17CA	TVS	Vbr=18.9..20.9V, Vrwm=17V, Ipp=21.7A, 600W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
UR	-	SMAJ17CA	TVS	Vrwm=17V, Vbr=18.9..20.9V, 14.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
US	-	BZX84J-C6V8	Zener diode	6.8V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
US	-	CZRER20VB	Zener diode	19.50 20.50V, Zzt=48Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
US	-	CZRF20VB	Zener diode	19.5..20.5V, Izt=5mA, Zzt=48Ω, 200mW	1005	70d	2d	Cmc
US	-	CZRFR20VB-HF	Zener diode	19.50..20.50V, Zzt=48Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
US	-	CZRQR20VB	Zener diode	19.50..20.50V, Izt=5mA, Zzt=48Ω, 125mW	0402	70d	2b	Cmc
US	-	CZRU20VB	Zener diode	19.50..20.50V, Izt=5mA, Zzt=48Ω, 150mW	0603	70d	2b	Cmc
US	-	CZRUR20VB-HF	Zener diode	19.50..20.50V, Zzt=48Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
US	-	FUF2J	Si-diode	U-fast Rec. Rect., 600V, 2A, Vf<1.7V(2A), 75ns	DO-214AA	1d	2j	Fag
US	-	P4SMAJ18C	TVS	Vrwm=18V, 12.4A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
US	-	SM4T33C	TVS	Vrwm=33V, 8.8A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
US11	-	USM11PT	Si-diode	Rectifer, S-fast, 50V, 1A	DO-214AC	1d	1a	Chm
US12	-	USM12PT	Si-diode	Rectifer, S-fast, 100V, 1A	DO-214AC	1d	1a	Chm
US13	-	USM13PT	Si-diode	Rectifer, S-fast, 200V, 1A	DO-214AC	1d	1a	Chm
US14	-	USM14PT	Si-diode	Rectifer, S-fast, 300V, 1A	DO-214AC	1d	1a	Chm
US15	-	USM15PT	Si-diode	Rectifer, S-fast, 400V, 1A	DO-214AC	1d	1a	Chm
US16	-	USM16PT	Si-diode	Rectifer, S-fast, 600V, 1A	DO-214AC	1d	1a	Chm
US17	-	USM17PT	Si-diode	Rectifer, S-fast, 800V, 1A	DO-214AC	1d	1a	Chm
US18	-	USM18PT	Si-diode	Rectifer, S-fast, 1000V, 1A	DO-214AC	1d	1a	Chm
US21	-	USM21PT	Si-diode	Rectifer, S-fast, 50V, 2A	DO-214AC	1d	1a	Chm
US22	-	USM22PT	Si-diode	Rectifer, S-fast, 100V, 2A	DO-214AC	1d	1a	Chm
US23	-	USM23PT	Si-diode	Rectifer, S-fast, 200V, 2A	DO-214AC	1d	1a	Chm
US24	-	USM24PT	Si-diode	Rectifer, S-fast, 300V, 2A	DO-214AC	1d	1a	Chm
US25	-	USM25PT	Si-diode	Rectifer, S-fast, 400V, 2A	DO-214AC	1d	1a	Chm
US26	-	USM26PT	Si-diode	Rectifer, S-fast, 600V, 2A	DO-214AC	1d	1a	Chm
US27	-	USM27PT	Si-diode	Rectifer, S-fast, 800V, 2A	DO-214AC	1d	1a	Chm
US28	-	USM28PT	Si-diode	Rectifer, S-fast, 1000V, 2A	DO-214AC	1d	1a	Chm
UT	-	BZX84J-C75	Zener diode	75V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UT	-	CD214A-T18CA	TVS	Vrwm=18V, Irsm=13.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
UT	-	CZRER22VB	Zener diode	21.45 22.55V, Zzt=55Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UT	-	CZRF22VB	Zener diode	21.45..22.55V, Izt=5mA, Zzt=55Ω, 200mW	1005	70d	2d	Cmc
UT	-	CZRFR22VB-HF	Zener diode	21.45..22.55V, Zzt=55Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UT	-	CZRQR22VB	Zener diode	21.45..22.55V, Izt=5mA, Zzt=55Ω, 125mW	0402	70d	2b	Cmc
UT	-	CZRU22VB	Zener diode	21.45..22.55V, Izt=5mA, Zzt=55Ω, 150mW	0603	70d	2b	Cmc
UT	-	CZRUR22VB-HF	Zener diode	21.45..22.55V, Zzt=55Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
UT	-	FUF2K	Si-diode	U-fast Rec. Rect., 800V, 2A, Vf<1.7V(2A), 75ns	DO-214AA	1d	2j	Fag
UT	-	GDZ36B-V-G	Zener diode	35.07..36.87V, Izt=5mA, Zzt=300Ω, 200mW	SOD-323	5d	2m	Vs
UT	-	P4SMAJ18CA	TVS	Vrwm=18V, 13.7A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
UT	-	SM4T33CA	TVS	Vrwm=33V, 8.8A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
UT	-	SMAJ18CA	TVS	Vrwm=18V, Vbr=20.0..22.1V, 13.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
UU	-	BZX84J-C7V5	Zener diode	7.5V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UU	-	CZRER24VB	Zener diode	23.40 24.60V, Zzt=62Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UU	-	CZRF24VB	Zener diode	23.4..24.6V, Izt=5mA, Zzt=62Ω, 200mW	1005	70d	2d	Cmc
UU	-	CZRFR24VB-HF	Zener diode	23.40..24.60V, Zzt=62Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UU	-	CZRQR24VB	Zener diode	23.40..24.60V, Izt=5mA, Zzt=62Ω, 125mW	0402	70d	2b	Cmc
UU	-	CZRU24VB	Zener diode	23.40..24.60V, Izt=5mA, Zzt=62Ω, 150mW	0603	70d	2b	Cmc
UU	-	CZRUR24VB-HF	Zener diode	23.40..24.60V, Zzt=62Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UU	-	FUF2M	Si-diode	U-fast Rec. Rect., 1000V, 2A, Vf<1.7V(2A), 75ns	DO-214AA	1d	2j	Fag
UU	-	P4SMAJ20C	TVS	Vrwm=20V, 11.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
UU	-	SM4T36C	TVS	Vrwm=36V, 8A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
UV	-	BZX84J-C8V2	Zener diode	8.2V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UV	-	CD214A-T20CA	TVS	Vrwm=20V, Irsm=12.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
UV	-	CZRER27VB	Zener diode	26.33 27.67V, Zzt=70Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UV	-	CZRF27VB	Zener diode	26.33..27.67V, Izt=5mA, Zzt=70Ω, 200mW	1005	70d	2d	Cmc
UV	-	CZRFR27VB-HF	Zener diode	26.33..27.67V, Zzt=70Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UV	-	CZRQR27VB	Zener diode	26.33..27.67V, Izt=5mA, Zzt=70Ω, 125mW	0402	70d	2b	Cmc
UV	-	CZRU27VB	Zener diode	26.33..27.67V, Izt=5mA, Zzt=70Ω, 150mW	0603	70d	2b	Cmc
UV	-	CZRUR27VB-HF	Zener diode	26.33..27.67V, Zzt=70Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UV	-	P4SMAJ20CA	TVS	Vrwm=20V, 12.3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
UV	-	SM4T36CA	TVS	Vrwm=36V, 8A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
UV	-	SMAJ20CA	TVS	Vrwm=20V, Vbr=22.2..24.5V, 12.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
UW	-	BZX84J-C9V1	Zener diode	9.1V±5%, If=250mA, 550mW	SOD-323FL	7d	1a	Nxp
UW	-	CZRER30VB	Zener diode	29.25 30.75V, Zzt=78Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UW	-	CZRF30VB	Zener diode	29.25..30.75V, Izt=5mA, Zzt=78Ω, 200mW	1005	70d	2d	Cmc
UW	-	CZRFR30VB-HF	Zener diode	29.25..30.75V, Zzt=78Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UW	-	CZRQR30VB	Zener diode	29.25..30.75V, Izt=5mA, Zzt=78Ω, 125mW	0402	70d	2b	Cmc
UW	-	CZRU30VB	Zener diode	29.25..30.75V, Izt=5mA, Zzt=78Ω, 150mW	0603	70d	2b	Cmc
UW	-	CZRUR30VB-HF	Zener diode	29.25..30.75V, Zzt=78Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UW	-	P4SMAJ22C	TVS	Vrwm=22V, 10.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
UW	-	SM4T39C	TVS	Vrwm=39V, 7.4A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
UX	-	CD214A-T22CA	TVS	Vrwm=22V, Irsm=11.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
UX	-	CZRER33VB	Zener diode	32.18 33.82V, Zzt=88Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UX	-	CZRF33VB	Zener diode	32.18..33.82V, Izt=5mA, Zzt=88Ω, 200mW	1005	70d	2d	Cmc
UX	-	CZRFR33VB-HF	Zener diode	32.18..33.82V, Zzt=88Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UX	-	CZRQR33VB	Zener diode	32.18..33.82V, Izt=5mA, Zzt=88Ω, 125mW	0402	70d	2b	Cmc
UX	-	CZRU33VB	Zener diode	32.18..33.82V, Izt=5mA, Zzt=88Ω, 150mW	0603	70d	2b	Cmc
UX	-	CZRUR33VB-HF	Zener diode	32.18..33.82V, Zzt=88Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UX	-	FES1K	Si-diode	U-fast Recovery, 800V, 1A, Vf<1.5V(1A), <120ns	DO-214AC	1d	2j	Fag
UX	-	P4SMAJ22CA	TVS	Vrwm=22V, 11.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
UX	-	SM4T39CA	TVS	Vrwm=39V, 7.4A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
UX	-	SMAJ22CA	TVS	Vrwm=22V, Vbr=24.4..26.9V, 11.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
UY	-	CZRER36VB	Zener diode	35.10 36.90V, Zzt=95Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UY	-	CZRF36VB	Zener diode	35.1..36.9V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2d	Cmc
UY	-	CZRFR36VB-HF	Zener diode	35.10..36.90V, Zzt=95Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UY	-	CZRQR36VB	Zener diode	35.10..36.90V, Izt=5mA, Zzt=95Ω, 125mW	0402	70d	2b	Cmc
UY	-	CZRU36VB	Zener diode	35.10..36.90V, Izt=5mA, Zzt=95Ω, 150mW	0603	70d	2b	Cmc
UY	-	CZRUR36VB-HF	Zener diode	35.10..36.90V, Zzt=95Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UY	-	KDZ30VVY	Zener diode	29.19..30.69V, Izt=2mA, Zzt=200Ω, 100mW	VSC	7d	1a	Kec
UY	-	P4SMAJ24C	TVS	Vrwm=24V, 9.3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
UZ	-	BZT52B33S	Zener diode	32.34..33.66V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Tsc
UZ	-	CD214A-T24CA	TVS	Vrwm=24V, Irsm=10.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
UZ	-	CZRER39VB	Zener diode	38.03 39.97V, Zzt=130Ω, Izt=5mA, 150mW	SOD-723F	70d	2b	Cmc
UZ	-	CZRF39VB	Zener diode	38.03..39.97V, Izt=5mA, Zzt=130Ω, 200mW	1005	70d	2d	Cmc
UZ	-	CZRFR39VB-HF	Zener diode	38.03..39.97V, Zzt=130Ω, Izt=5mA, 200mW	1005	70d	2d	Cmc
UZ	-	CZRQR39VB	Zener diode	38.03..39.97V, Izt=5mA, Zzt=130Ω, 125mW	0402	70d	2b	Cmc
UZ	-	CZRU39VB	Zener diode	38.03..39.97V, Izt=5mA, Zzt=130Ω, 150mW	0603	70d	2b	Cmc
UZ	-	CZRUR39VB-HF	Zener diode	38.03..39.97V, Zzt=130Ω, Izt=5mA, 150mW	0603	70d	2d	Cmc
UZ	-	MM3Z33VB	Zener diode	32.34..33.66V, Zzt=75Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
UZ	-	MM3Z33VBW	Zener diode	32.34..33.66V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Tac
UZ	-	P4SMAJ24CA	TVS	Vrwm=24V, 10.3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
UZ	-	SMA6J24CA	TVS	Vbr=26.7..29.5V, Vrwm=24V, Ipp=15.4A, 600W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
UZ	-	SMAJ24CA	TVS	Vrwm=24V, Vbr=26.7..29.5V, 10.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
UZ	-	TCMM3Z33VB	Zener diode	33V±2%, Izt=5mA, Zzt=75Ω, 200mW	SOD-323FL	7d	1a	Tac
V	-	MM9D20V	Zener diode	19.0..21.0V, Izt=5mA, Zzt=55Ω, 200mW	SOD-923	7d	1n	Wtr
V	-	MM9D3V9	Zener diode	3.71..4.10V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1b	Wtr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
V	-	MMSZ5223BPT	Zener diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOD-523	6d	1a	Chm
V	-	NZ9F11VST	Zener diode	10.76..11.22V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	2m	Ons
V	-	NZ9F20VT	Zener diode	19.0..21.0V, Izt=5mA, Zzt=55Ω, 200mW	SOD-923	7d	1n	Ons
V	-	NZ9F3V9T	Zener diode	3.71..4.10V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1b	Ons
V.	-	MMSZ5223SPT	Zener diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOD-523	6d	1a	Chm
V1	-	1SV310	C-diode	UHF, VCO, 10V, 4.45/5.45pF(4V), Rs<0.4Ω(470MHz)	SOD-123	5d	1a	Tos
V1	-	1SV311	C-diode	UHF, VCO, 10V, 4.45/5.45pF(4V), Rs<0.4Ω(470MHz)	SOD-323	5d	1a	Tos
V1	-	FES2A	Si-diode	U-fast Recovery, 50V, 2A, <50ns	DO-214AA	1d	2j	Fag
V1	-	MMSZ6V2T	Zener diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 500mW	SOD-123	5d	1u	Mot
V2	-	1SV329	C-diode	UHF-VCO, 10V, 1.85/2.45pF(4V), Rs<0.7Ω(470MHz)	SOD-123	5d	1a	Tos
V2	-	FES2B	Si-diode	U-fast Recovery, 100V, 2A, <50ns	DO-214AA	1d	2j	Fag
V2	-	HVU362	C-diode	VCXO, 15V, 41.6/49.9pF(1V)	SOD-323	5d	1a	Ren
V2	-	MMSZ6V8T	Zener diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1u	Mot
V3	-	FES2D	Si-diode	U-fast Recovery, 200V, 2A, <50ns	DO-214AA	1d	2j	Fag
V3	-	HVU363A	C-diode	VHF-tuning, 32V, 34.6/42.3pF(1V)	SOD-323	5d	1a	Ren
V3	-	MMSZ7V5T	Zener diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1u	Mot
V4	-	FES2F	Si-diode	U-fast Recovery, 300V, 2A, <50ns	DO-214AA	1d	2j	Fag
V4	-	MMSZ8V2T	Zener diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1u	Mot
V5	-	BZX584B36V	Zener diode	35.28..36.72V, Izt=2mA, Zzt=90Ω, 200mW	SOD-523FL	7d	1a	Tac
V5	-	FES2G	Si-diode	U-fast Recovery, 400V, 2A, <50ns	DO-214AA	1d	2j	Fag
V5	-	MM5Z36VB	Zener diode	35.28..36.72V, Izt=2mA, Zzt=90Ω, 200mW	SOD-523FL	7d	1a	Tac
V5	-	MMSZ9V1T	Zener diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1u	Mot
V5	-	UDZS30B	Zener diode	29.19..30.69V, Izt=5mA, Zzt=200Ω, 200mW	SOD-323	5d	1a	Wtr
V6	-	1SV313	C-diode	UHF, VCO, 10V, 2.75/3.4pF(2.5V), Rs<0.45Ω(470MHz)	SOD-123	5d	1a	Tos
V6	-	1SV314	C-diode	UHF, VCO, 10V, 2.75/3.4pF(2.5V), Rs<0.45Ω(470MHz)	SOD-323	5d	1a	Tos
V6	-	FES2J	Si-diode	U-fast Recovery, 600V, 2A, <50ns	DO-214AA	1d	2j	Fag
V6	-	HVU365	C-diode	VCO, 15V, 3..27pF(4..1V)	SOD-323	5d	1a	Ren
V61	-	F1V61B	Si-Varistor	VDR/Varistor, 150mA, 2.3V(10A)	SOD-123	5d	1a	Org
V62	-	F1V62B	Si-Varistor	VDR/Varistor, 150mA, 2.3V(10A)	SOD-123	5d	1a	Org
V7	-	1SV322	C-diode	TCXO/VCO, 10V, 6..7.1pF(4V), Rs<0.8Ω(100MHz)	SOD-123	5d	1a	Tos
V7	-	1SV323	C-diode	TCXO/VCO, 10V, 6..7.1pF(4V), Rs<0.8Ω(100MHz)	SOD-323	5d	1a	Tos
V7	-	FURS360B	Si-diode	U-fast Recovery, 600V, 3A, Vf<1.25V(3A), 50ns	DO-214AA	1d	2j	Fag
V8	-	1SV324	C-diode	TCXO/VCO, 10V, 9.2..12pF(4V), Rs<0.8Ω(100MHz)	SOD-123	5d	1a	Tos
V8	-	1SV325	C-diode	TCXO/VCO, 10V, 9.2..12pF(4V), Rs<0.8Ω(100MHz)	SOD-323	5d	1a	Tos
V8	-	BAP1321-03	PIN-diode	RF, 60V, 100mA, 500mW, 0.45pF, 1.3Ω(100mA/100MHz)	SOD-323	5d	1a	Phi
V8	-	BZT52C20WT	Zener diode	19.0..21.0V, Izt=5mA, Zzt=55Ω, 200mW	SOD-523	6d	1a	Ttr
V8	-	FS2JI	Si-diode	Rectifier, 600V, 3A, Vf<1.05V(3A), 4µs	DO-214AA	1d	2j	Fag
V8	-	MM5Z20H	Zener diode	18.8..21.2V, Izt=2mA, Zzt=55Ω, 200mW	SOD-523	6d	1a	Zow
V8	-	MM5Z20V	Zener diode	20V±5%, Izt=5mA, Zzt=55Ω, 200mW	SOD-523	6d	1a	Eic
V9	-	FS2MI	Si-diode	Rectifier, 1000V, 3A, Vf<1.05V(3A), 4µs	DO-214AA	1d	2j	Fag
VA	-	BAV16BPT	Si-diode	Sw, 75V, 150mA, Vf<<1.25V(150mA), 4ns	SOD-123	5d	1a	Chm
VA	-	FES2DB	Si-diode	U-fast Recovery, 200V, 2A, <25ns	DO-214AA	1d	2j	Fag
VA	-	PZU10BA	Zener diode	10V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VA	-	TV04A141KB-G	TVS	Vrwm=140V, Vbr=155.68..190.40V, Ipp=1.60A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VB	-	KDZ12B	Zener diode	12V±2.5%, 20mA, 1W	PMDU	7d	1s	Rhm
VB	-	MMBD4448BPT	Si-diode	Sw, 80V, 250mA, Vf<1V(100mA), 4ns	SOD-123	5d	1a	Chm
VB	-	PZU10B1A	Zener diode	10V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VB	-	TV04A141JB-G	TVS	Vrwm=140V, Vbr=155.0..171.0V, Ipp=1.76A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VC	-	CHBD3004BPT	Si-diode	Sw, 350V, 225mA, Vf<1V(100mA), 50ns	SOD-123	5d	1a	Chm
VC	-	PZU10B2A	Zener diode	10V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VD	-	P4SMAJ110C	TVS	Vrwm=110V, 2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
VD	-	P4SMAJ26C	TVS	Vrwm=26V, 8.6A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VD	-	P6SMB120C	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VD	-	P6SMB130C	TVS	Vrwm=130V, Vbr=124..137V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VD	-	PZU10B3A	Zener diode	10V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VD	-	SM4T6V8C	TVS	Vrwm=6.8V, 38A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
VD	-	SMAJ110C	TVS	Vrwm=110V, Vbr=122..135V, 1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
VD	-	TV04A111KB-G	TVS	Vrwm=110.0V, Vbr=122.0..149.0V, Ipp=2.04A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VDD	-	TVS10W6V8T	TVS	Vrwm=6.8V, Vbr=5.78..7.82V, 10W(8..20µs), Bidir.	SOD-523	7ba	1d	Did
VE	-	CD214A-T26CA	TVS	Vrwm=26V, Irsm=9.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
VE	-	P4SMAJ110CA	TVS	Vrwm=110V, 2.3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
VE	-	P4SMAJ26CA	TVS	Vrwm=26V, 9.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VE	-	P6SMB120CA	TVS	Vrwm=120V, Vbr=114..126V, 3.6A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VE	-	PMF110CA	TVS	Vbr=122..135V, Vrwm=110V, Ipp=1.13A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
VE	-	PZU11BA	Zener diode	11V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VE	-	SM4T6V8CA	TVS	Vrwm=6.8V, 38A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
VE	-	SMAJ110CA	TVS	Vrwm=110V, Vbr=122..135V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
VE	-	SMAJ26CA	TVS	Vrwm=26V, Vbr=28.9..35.3V, 8.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
VE	-	TV04A111JB-G	TVS	Vrwm=110.0V, Vbr=122.0..135.0V, Ipp=2.26A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VF	-	MAZD270	Zener diode	25.1..28.9V, Zzt=120Ω(5mA), 120mW	SSSMini2	7d	1a	Pan

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
VF	-	P4SMAJ120C	TVS	Vrwm=120V, 1.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
VF	-	P4SMAJ28C	TVS	Vrwm=28V, 8A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VF	-	PZU11B1A	Zener diode	11V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VF	-	SDM100K30L	Si-diode	Schottky, Sw, 30V, 1A, Vf<0.485V(1A), 22pF	SOD-323	5d	1d	Di
VF	-	SM4T7V5C	TVS	Vrwm=7.5V, 35.4A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
VF	-	SMAJ120C	TVS	Vrwm=120V, Vbr=133..163V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
VF	-	TV04A121KB-G	TVS	Vrwm=120.0V, Vbr=133.0..163.0V, Ipp=1.87A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VG	-	CD214A-T28CA	TVS	Vrwm=28V, Irsm=8.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
VG	-	P4SMAJ120CA	TVS	Vrwm=120V, 2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
VG	-	P4SMAJ28CA	TVS	Vrwm=28V, 8.8A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VG	-	P6SMB130CA	TVS	Vrwm=130V, Vbr=124..137V, 3.4A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VG	-	PMF120CA	TVS	Vbr=133..147V, Vrwm=120V, Ipp=1.04A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
VG	-	PZU11B2A	Zener diode	11V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VG	-	SM4T7V5CA	TVS	Vrwm=7.5V, 35.4A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
VG	-	SMAJ120CA	TVS	Vrwm=120V, Vbr=133..147V, 1.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
VG	-	SMAJ28CA	TVS	Vrwm=28V, Vbr=31.1..34.4V, 8.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
VG	-	TV04A121JB-G	TVS	Vrwm=120.0V, Vbr=133.0..147.0V, Ipp=2.07A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VH	-	P4SMAJ130C	TVS	Vrwm=130V, 1.7A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
VH	-	P4SMAJ30C	TVS	Vrwm=30V, 7.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VH	-	P6SMB150C	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VH	-	PZU11B3A	Zener diode	11V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VH	-	SMAJ130C	TVS	Vrwm=130V, Vbr=144..176V, 1.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
VH	-	TV04A131KB-G	TVS	Vrwm=130V, Vbr=144.0..176.0V, Ipp=1.73A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VJ	-	FS2KI	Si-diode	Rectifier, 800V, 3A, Vf<1.05V(3A), 4µs	DO-214AA	1d	2j	Fag
VK	-	CD214A-T30CA	TVS	Vrwm=30V, Irsm=8.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
VK	-	P4SMAJ130CA	TVS	Vrwm=130V, 1.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
VK	-	P4SMAJ30CA	TVS	Vrwm=30V, 8.3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VK	-	P6SMB150CA	TVS	Vbr=143..158V, Vrwm=128V, 2.9A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VK	-	PMF130CA	TVS	Vbr=144..159V, Vrwm=130V, Ipp=0.96A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
VK	-	PZU12BA	Zener diode	12V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VK	-	SMAJ130CA	TVS	Vrwm=130V, Vbr=144..159V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
VK	-	SMAJ30CA	TVS	Vrwm=30V, Vbr=33.3..36.8V, 8.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
VK	-	SMZG3788A	Zener diode	9.1V±5%, 140mA, Zzt=4Ω, 1.5W	DO-215AA	5d	1k	Vs
VK	-	SMZJ3788A	Zener diode	9.1V±5%, 140mA, Zzt=4Ω, 1.5W	DO-214AA	1d	1k	Vs
VK	-	TV04A131JB-G	TVS	Vrwm=130V, Vbr=144.0..159.0V, Ipp=1.91A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VL	-	P4SMAJ150C	TVS	Vrwm=150V, 1.5A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Lsr
VL	-	P4SMAJ33C	TVS	Vrwm=33V, 6.8A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VL	-	P6SMB160C	TVS	Vrwm=160V, Vbr=152..168V, 2.7A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VL	-	PMF140CA	TVS	Vbr=155..171V, Vrwm=140V, Ipp=0.89A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
VL	-	PZU12B1A	Zener diode	12V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VL	-	SMAJ150C	TVS	Vrwm=150V, Vbr=167..204V, 1.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
VL	-	SMZG3788B	Zener diode	9.1V±10%, 140mA, Zzt=4Ω, 1.5W	DO-215AA	5d	1k	Vs
VL	-	SMZJ3788B	Zener diode	9.1V±10%, 140mA, Zzt=4Ω, 1.5W	DO-214AA	1d	1k	Vs
VL	-	TV04A151KB-G	TVS	Vrwm=150.0V, Vbr=167.0..204.0V, Ipp=1.49A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VM	-	CD214A-T33CA	TVS	Vrwm=33V, Irsm=7.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
VM	-	P4SMAJ150CA	TVS	Vrwm=150V, 1.6A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Lsr
VM	-	P4SMAJ33CA	TVS	Vrwm=33V, 7.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VM	-	P6SMB160CA	TVS	Vrwm=160V, Vbr=152..168V, 2.7A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VM	-	PMF150CA	TVS	Vbr=167..185V, Vrwm=150V, Ipp=0.82A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
VM	-	PZU12B2A	Zener diode	12V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VM	-	SMAJ150CA	TVS	Vrwm=150V, Vbr=167..185V, 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
VM	-	SMAJ33CA	TVS	Vrwm=33V, Vbr=36.7..40.6V, 7.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
VM	-	TV04A151JB-G	TVS	Vrwm=150.0V, Vbr=167.0..185.0V, Ipp=1.65A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VN	-	P4SMAJ160C	TVS	Vrwm=160V, 1.4A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Lsr
VN	-	P4SMAJ36C	TVS	Vrwm=36V, 6.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VN	-	P6SMB170C	TVS	Vrwm=170V, Vbr=162..179V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VN	-	PZU12B3A	Zener diode	12V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VN	-	SM4T10C	TVS	Vrwm=10V, 27.6A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
VN	-	SMAJ160C	TVS	Vrwm=160V, Vbr=178..218V, 1A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
VN	-	TV04A161KB-G	TVS	Vrwm=160.0V, Vbr=178.0..218.0V, Ipp=1.39A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VP	-	CD214A-T36CA	TVS	Vrwm=36V, Irsm=6.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
VP	-	CMDZ12L	Zener diode	11.40..12.60V, Izt=0.5mA, Zzt=80Ω, 250mW	SOD-323	5d	1a	Cen
VP	-	P4SMAJ160CA	TVS	Vrwm=160V, 1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lsr
VP	-	P4SMAJ36CA	TVS	Vrwm=36V, 6.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VP	-	P6SMB170CA	TVS	Vrwm=170V, Vbr=162..179V, 2.6A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VP	-	PMF160CA	TVS	Vbr=178..197V, Vrwm=160V, Ipp=0.77A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
VP	-	PZU13BA	Zener diode	13V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VP	-	SM4T10CA	TVS	Vrwm=10V, 27.6A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
VP	-	SMAJ160CA	TVS	Vrwm=160V, Vbr=178..197V, 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
VP	-	SMAJ36CA	TVS	Vrwm=36V, Vbr=40.0..44.2V, 6.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
VP	-	TV04A161JB-G	TVS	Vrwm=160.0V, Vbr=178.0..197.0V, Ipp=1.54A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VQ	-	P4SMAJ170C	TVS	Vrwm=170V, 1.3A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Lsr
VQ	-	P4SMAJ40C	TVS	Vrwm=40V, 5.6A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VQ	-	P6SMB180C	TVS	Vrwm=180V, Vbr=171 189V, 2.4A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VQ	-	SMAJ170C	TVS	Vrwm=170V, Vbr=189..209V, 0.99A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
VQ	-	TV04A171KB-G	TVS	Vrwm=170.0V, Vbr=189.0..231.0V, Ipp=1.32A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VR	-	CD214A-T40CA	TVS	Vrwm=40V, Irsm=6.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
VR	-	P4SMAJ170CA	TVS	Vrwm=170V, 1.4A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Lsr
VR	-	P4SMAJ40CA	TVS	Vrwm=40V, 6.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VR	-	P6SMB180CA	TVS	Vrwm=180V, Vbr=171 189V, 2.4A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VR	-	PMF170CA	TVS	Vbr=189..209V, Vrwm=170V, Ipp=0.73A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
VR	-	PZU13B1A	Zener diode	13V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VR	-	SMAJ170CA	TVS	Vrwm=170V, Vbr=189..209V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
VR	-	SMAJ40CA	TVS	Vrwm=40V, Vbr=44.4..49.1V, 6.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
VR	-	TV04A171JB-G	TVS	Vrwm=170.0V, Vbr=189.0..209.0V, Ipp=1.45A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VS	-	P4SMAJ43C	TVS	Vrwm=43V, 5.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VS	-	P6SMB200C	TVS	Vrwm=200V, Vbr=190..210V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VS	-	PZU13B2A	Zener diode	13V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VS	-	SM4T12C	TVS	Vrwm=12V, 24A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
VS	-	SMAJ188CA	TVS	Vrwm=188V, Vbr=209..231V, 0.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
VS	-	TV04A181KB-G	TVS	Vrwm=180.0V, Vbr=200.16..244.80V, Ipp=1.24A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VT	-	CD214A-T43CA	TVS	Vrwm=43V, Irsm=5.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
VT	-	P4SMAJ180CA	TVS	Vrwm=180V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lsr
VT	-	P4SMAJ43CA	TVS	Vrwm=43V, 5.7A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VT	-	P6SMB200CA	TVS	Vrwm=200V, Vbr=190..210V, 2.2A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VT	-	PMF180CA	TVS	Vbr=200..220V, Vrwm=180V, Ipp=0.69A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
VT	-	PZU13B3A	Zener diode	13V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VT	-	SM4T12CA	TVS	Vrwm=12V, 24A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
VT	-	SMAJ180CA	TVS	Vrwm=180V, Vbr=200..220V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
VT	-	SMAJ188C	TVS	Vrwm=188V, Vbr=209..255V, 0.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
VT	-	SMAJ43CA	TVS	Vrwm=43V, Vbr=47.8..52.8V, 5.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
VT	-	TV04A181JB-G	TVS	Vrwm=180.0V, Vbr=200.0..220.0V, Ipp=1.37A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VU	-	P4SMAJ45C	TVS	Vrwm=45V, 5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VU	-	P6SMB220C	TVS	Vrwm=220V, Vbr=209..231V, 1.83A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VU	-	PMF190CA	TVS	Vbr=211..232V, Vrwm=190V, Ipp=0.69A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
VU	-	PZU14B2A	Zener diode	14V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VU	-	TV04A191KB-G	TVS	Vrwm=190.0V, Vbr=211.28..258.40V, Ipp=1.18A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VV	-	CD214A-T45CA	TVS	Vrwm=45V, Irsm=5.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
VV	-	P4SMAJ200CA	TVS	Vrwm=200V, 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lsr
VV	-	P4SMAJ45CA	TVS	Vrwm=45V, 5.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VV	-	P6SMB220CA	TVS	Vrwm=220V, Vbr=209..231V, 1.83A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VV	-	PZU15BA	Zener diode	15V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VV	-	SMAJ200CA	TVS	Vrwm=200V, Vbr=224..247V, 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
VV	-	SMAJ45CA	TVS	Vrwm=45V, Vbr=50.0..55.3V, 5.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
VV	-	TV04A191JB-G	TVS	Vrwm=190.0V, Vbr=211.0..232.0V, Ipp=1.30A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VW	-	P4SMAJ48C	TVS	Vrwm=48V, 4.7A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VW	-	P6SMB250C	TVS	Vbr=237..263V, Vrwm=214V, 1.75A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VW	-	PZU15B1A	Zener diode	15V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VW	-	SM4T15C	TVS	Vrwm=15V, 19A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
VW	-	TV04A201JB-G	TVS	Vrwm=200.0V, Vbr=224.0..247.0V, Ipp=1.23A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VX	-	CD214A-T48CA	TVS	Vrwm=48V, Irsm=5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
VX	-	P4SMAJ220CA	TVS	Vrwm=220V, 1.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lsr
VX	-	P4SMAJ48CA	TVS	Vrwm=48V, 5.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VX	-	P6SMB250CA	TVS	Vbr=237..263V, Vrwm=214V, 1.75A, 600W(1ms), Bidir.	DO-214AA	1ba	2k	Fag
VX	-	PZU15B2A	Zener diode	15V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VX	-	SM4T15CA	TVS	Vrwm=15V, 19A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
VX	-	SMAJ220CA	TVS	Vrwm=220V, Vbr=246..272V, 1.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
VX	-	SMAJ48CA	TVS	Vrwm=48V, Vbr=53.3..58.9V, 5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
VX	-	TV04A221JB-G	TVS	Vrwm=220.0V, Vbr=246.0..272.0V, Ipp=1.12A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
VY	-	KDZ33VVY	Zener diode	32.15..33.79V, Izt=2mA, Zzt=250Ω, 100mW	VSC	7d	1a	Kec
VY	-	P4SMAJ51C	TVS	Vrwm=51V, 4.4A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VY	-	PZU15B3A	Zener diode	15V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VZ	-	BZT52B36S	Zener diode	35.28..36.72V, Izt=2mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1a	Tsc
VZ	-	CD214A-T51CA	TVS	Vrwm=51V, Irsm=4.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
VZ	-	MM3Z36VB	Zener diode	35.28..36.72V, Zzt=84Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
VZ	-	MM3Z36VBW	Zener diode	35.28..36.72V, Izt=2mA, Zzt=90Ω, 200mW	SOD-323FL	7d	1a	Tac
VZ	-	P4SMAJ250CA	TVS	Vrwm=250V, 1.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lsr
VZ	-	P4SMAJ51CA	TVS	Vrwm=51V, 4.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
VZ	-	PZU16BA	Zener diode	16V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
VZ	-	SMAJ250CA	TVS	Vrwm=250V, Vbr=279..309V, 1.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Mco

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
VZ	-	SMAJ51CA	TVS	Vrwm=51V, Vbr=56.7..69.3V, 4.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
VZ	-	TCMM3Z36VB	Zener diode	36V±2%, Izt=5mA, Zzt=84Ω, 200mW	SOD-323FL	7d	1a	Tac
VZ	-	TV04A251JB-G	TVS	Vrwm=250.0V, Vbr=279.0..309.0V, Ipp=0.99A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
W	-	MAZD068	Zener diode	6.4..7.2V, Zzt=20Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
W	-	MMSZ5224BPT	Zener diode	2.8V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOD-523	6d	1a	Chm
W.	-	MMSZ5224SPT	Zener diode	2.8V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOD-523	6d	1a	Chm
W07	-	SMTPB62	TVS	Vrwm=62V, 100A, 5W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
W1	-	BZT52B2V4	Zener diode	2.4V±2%, Izt=5mA, Zzt=100Ω, 410mW	SOD-123	5d	1b	Pjt
W1	-	BZT52C2V4-F	Zener diode	2.28..2.56V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
W1	-	BZT52C2V4S	Zener diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1b	Pjt
W1	-	BZT52C2V4-V	Zener diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1k	Vs
W1	-	BZT52C2V4WS	Zener diode	2.28..2.52V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
W1	-	BZT52C2V4WT	Zener diode	2.28..2.52V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	6d	1a	Ttr
W1	-	BZT52C2V4WU	Zener diode	2.28..2.52V, Izt=5mA, Zzt=100Ω, 200mW	SOD-723	7d	1a	Ttr
W1	-	BZT52C2V7	Zener diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1d	Di
W1	-	BZT52C2V7S	Zener diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Di
W1	-	BZT52C2V7T	Zener diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Di
W1	-	BZX384C2V4-V	Zener diode	2.4V±5%, Izt=5mA, Zzt=70Ω, 200mW	SOD-323	5d	2m	Vs
W1	-	BZX584C2V4	Zener diode	2.2..2.6V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	7d	1a	Pjt
W1	-	BZX784C2V4	Zener diode	2.28 2.52V, Zzt=100Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
W1	-	CZRW55C2V7-G	Zener diode	2.7..2.90V, Zzt=100Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
W1	-	FES3A	Si-diode	U-fast Recovery, 50V, 3A, <50ns	DO-214AB	1d	2j	Fag
W1	-	LBZT52C2V7T1G	Zener diode	2.5..2.9V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
W1	-	MEZ02-2.4-D3	Zener diode	2.28..2.52V, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	1a	Mts
W1	-	MM3Z2V7	Zener diode	2.5..2.9V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Sec
W1	ag	BZT52C2V7	Zener diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1d	Di
W1	ag	BZT52C2V7S	Zener diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Di
W11	-	SMTPB68	TVS	Vrwm=68V, 100A, 5W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
W17	-	SMTPB100	TVS	Vrwm=100V, 100A, 5W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
W2	-	BZT52B2V7	Zener diode	2.7V±2%, Izt=5mA, Zzt=100Ω, 410mW	SOD-123	5d	1b	Pjt
W2	-	BZT52C2V7-F	Zener diode	2.5..2.9V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
W2	-	BZT52C2V7S	Zener diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1b	Pjt
W2	-	BZT52C2V7-V	Zener diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1k	Vs
W2	-	BZT52C2V7WS	Zener diode	2.57..2.84V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
W2	-	BZT52C2V7WT	Zener diode	2.57..2.84V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	6d	1a	Ttr
W2	-	BZT52C2V7WU	Zener diode	2.57..2.84V, Izt=5mA, Zzt=100Ω, 200mW	SOD-723	7d	1a	Ttr
W2	-	BZT52C3V0	Zener diode	3.0V±5%, Izt=5mA, Zzt=95Ω, 500mW	SOD-123	5d	1d	Di
W2	-	BZT52C3V0S	Zener diode	3.0V±5%, Izt=5mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Di
W2	-	BZT52C3V0T	Zener diode	3.0V±5%, Izt=5mA, Zzt=95Ω, 150mW	SOD-523	6d	1a	Di
W2	-	BZX384C2V7-V	Zener diode	2.7V±5%, Izt=5mA, Zzt=75Ω, 200mW	SOD-323	5d	2m	Vs
W2	-	BZX584C2V7	Zener diode	2.5..2.9V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	7d	1a	Pjt
W2	-	BZX784C2V7	Zener diode	2.57..2.84V, Zzt=100Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
W2	-	CZRW55C3V0-G	Zener diode	3.0..3.20V, Zzt=95Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
W2	-	FES3B	Si-diode	U-fast Recovery, 100V, 3A, <50ns	DO-214AB	1d	2j	Fag
W2	-	LBZT52C3V0T1G	Zener diode	2.8..3.2V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
W2	-	MEZ02-2.7-D3	Zener diode	2.57..2.84V, Izt=5mA, Zzt=83Ω, 200mW	SOD-323	5d	1a	Mts
W2	-	MM3Z3V0	Zener diode	2.8..3.2V, Izt=5mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Sec
W2	ag	BZT52C3V0	Zener diode	3.0V±5%, Izt=5mA, Zzt=95Ω, 500mW	SOD-123	5d	1d	Di
W2	ag	BZT52C3V0S	Zener diode	3.0V±5%, Izt=5mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Di
W21	-	SMTPB120	TVS	Vrwm=120V, 100A, 5W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
W23	-	SMTPB130	TVS	Vrwm=130V, 100A, 5W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
W29	-	SMTPB180	TVS	Vrwm=180V, 100A, 5W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
W3	-	BZT52B3V0	Zener diode	3.0V±2%, Izt=5mA, Zzt=95Ω, 410mW	SOD-123	5d	1b	Pjt
W3	-	BZT52C3V0-F	Zener diode	2.8..3.2V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
W3	-	BZT52C3V0S	Zener diode	3.0V±5%, Izt=5mA, Zzt=95Ω, 200mW	SOD-323	5d	1b	Pjt
W3	-	BZT52C3V0-V	Zener diode	3.0V±5%, Izt=5mA, Zzt=95Ω, 500mW	SOD-123	5d	1k	Vs
W3	-	BZT52C3V0WS	Zener diode	2.85..3.15V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
W3	-	BZT52C3V0WT	Zener diode	2.85..3.15V, Izt=5mA, Zzt=95Ω, 200mW	SOD-523	6d	1a	Ttr
W3	-	BZT52C3V0WU	Zener diode	2.85..3.15V, Izt=5mA, Zzt=95Ω, 200mW	SOD-723	7d	1a	Ttr
W3	-	BZT52C3V3	Zener diode	3.3V±5%, Izt=5mA, Zzt=95Ω, 500mW	SOD-123	5d	1d	Di
W3	-	BZT52C3V3S	Zener diode	3.3V±5%, Izt=5mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Di
W3	-	BZT52C3V3T	Zener diode	3.3V±5%, Izt=5mA, Zzt=95Ω, 150mW	SOD-523	6d	1a	Di
W3	-	BZX384C3V0-V	Zener diode	3.0V±5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	2m	Vs
W3	-	BZX584C3V0	Zener diode	2.8..3.2V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	7d	1a	Pjt
W3	-	BZX784C3V0	Zener diode	2.85..3.15V, Zzt=95Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
W3	-	CZRW55C3V3-G	Zener diode	3.3..3.50V, Zzt=95Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
W3	-	FES3D	Si-diode	U-fast Recovery, 200V, 3A, <50ns	DO-214AB	1d	2j	Fag
W3	-	LBZT52C3V3T1G	Zener diode	3.1..3.5V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
W3	-	MEZ02-3.0-D3	Zener diode	2.85..3.15V, Izt=5mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Mts
W3	-	MM3Z3V3	Zener diode	3.1..3.5V, Izt=5mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Sec

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
W3	ag	BZT52C3V3	Zener diode	3.3V±5%, Izt=5mA, Zzt=95Ω, 500mW	SOD-123	5d	1d	Di
W3	ag	BZT52C3V3S	Zener diode	3.3V±5%, Izt=5mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Di
W31	-	SMTPB200	TVS	Vrwm=200V, 100A, 5W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
W35	-	SMTPB220	TVS	Vrwm=220V, 100A, 5W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
W39	-	SMTPB240	TVS	Vrwm=240V, 100A, 5W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
W4	-	BZT52B3V3	Zener diode	3.3V±2%, Izt=5mA, Zzt=95Ω, 410mW	SOD-123	5d	1b	Pjt
W4	-	BZT52C3V3-F	Zener diode	3.1..3.5V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
W4	-	BZT52C3V3S	Zener diode	3.3V±5%, Izt=5mA, Zzt=95Ω, 200mW	SOD-323	5d	1b	Pjt
W4	-	BZT52C3V3-V	Zener diode	3.3V±5%, Izt=5mA, Zzt=95Ω, 500mW	SOD-123	5d	1k	Vs
W4	-	BZT52C3V3WS	Zener diode	3.14..3.4V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
W4	-	BZT52C3V3WT	Zener diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 200mW	SOD-523	6d	1a	Ttr
W4	-	BZT52C3V3WU	Zener diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 200mW	SOD-723	7d	1a	Ttr
W4	-	BZT52C3V6	Zener diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1d	Di
W4	-	BZT52C3V6S	Zener diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Di
W4	-	BZT52C3V6T	Zener diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 150mW	SOD-523	6d	1a	Di
W4	-	BZX384C3V3-V	Zener diode	3.3V±5%, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	2m	Vs
W4	-	BZX584C3V3	Zener diode	3.1..3.5V, Izt=5mA, Zzt=95Ω, 200mW	SOD-523	7d	1a	Pjt
W4	-	BZX784C3V3	Zener diode	3.14..3.47V, Zzt=95Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
W4	-	CZRW55C3V6-G	Zener diode	3.6..3.80V, Zzt=90Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
W4	-	FES3F	Si-diode	U-fast Recovery, 300V, 3A, <50ns	DO-214AB	1d	2j	Fag
W4	-	LBZT52C3V6T1G	Zener diode	3.4..3.8V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
W4	-	MEZ02-3.3-D3	Zener diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Mts
W4	-	MM3Z3V6	Zener diode	3.4..3.8V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Sec
W4	ag	BZT52C3V6	Zener diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1d	Di
W4	ag	BZT52C3V6S	Zener diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Di
W43	-	SMTPB270	TVS	Vrwm=270V, 100A, 5W(1ms), Bidir.	DO-214AB	1ba	1r	Ste
W5	-	BZT52B3V6	Zener diode	3.6V±2%, Izt=5mA, Zzt=90Ω, 410mW	SOD-123	5d	1b	Pjt
W5	-	BZT52C3V6-F	Zener diode	3.4..3.8V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
W5	-	BZT52C3V6S	Zener diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1b	Pjt
W5	-	BZT52C3V6-V	Zener diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1k	Vs
W5	-	BZT52C3V6WS	Zener diode	3.42..3.78V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
W5	-	BZT52C3V6WT	Zener diode	3.42..3.78V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Ttr
W5	-	BZT52C3V6WU	Zener diode	3.42..3.78V, Izt=5mA, Zzt=90Ω, 200mW	SOD-723	7d	1a	Ttr
W5	-	BZT52C3V9	Zener diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1d	Di
W5	-	BZT52C3V9S	Zener diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Di
W5	-	BZT52C3V9T	Zener diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 150mW	SOD-523	6d	1a	Di
W5	-	BZX384C3V6-F	Zener diode	3.4..3.8V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
W5	-	BZX384C3V6-V	Zener diode	3.6V±5%, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	2m	Vs
W5	-	BZX584C3V6	Zener diode	3.4..3.8V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	7d	1a	Pjt
W5	-	BZX784C3V6	Zener diode	3.42..3.78V, Zzt=90Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
W5	-	CZRW55C3V9-G	Zener diode	3.9..4.10V, Zzt=90Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
W5	-	FES3G	Si-diode	U-fast Recovery, 400V, 3A, <50ns	DO-214AB	1d	2j	Fag
W5	-	LBZT52C3V9T1G	Zener diode	3.7..4.1V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
W5	-	MEZ02-3.6-D3	Zener diode	3.42..3.78V, Izt=5mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Mts
W5	-	MM3Z3V9	Zener diode	3.7..4.1V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Sec
W5	ag	BZT52C3V9	Zener diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1d	Di
W5	ag	BZT52C3V9S	Zener diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Di
W6	-	BZT52B3V9	Zener diode	3.9V±2%, Izt=5mA, Zzt=90Ω, 410mW	SOD-123	5d	1b	Pjt
W6	-	BZT52C3V9-F	Zener diode	3.7..4.1V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
W6	-	BZT52C3V9S	Zener diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1b	Pjt
W6	-	BZT52C3V9-V	Zener diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1k	Vs
W6	-	BZT52C3V9WS	Zener diode	3.71..4.10V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
W6	-	BZT52C3V9WT	Zener diode	3.71..4.1V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Ttr
W6	-	BZT52C3V9WU	Zener diode	3.71..4.1V, Izt=5mA, Zzt=90Ω, 200mW	SOD-723	7d	1a	Ttr
W6	-	BZT52C4V3	Zener diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1d	Di
W6	-	BZT52C4V3S	Zener diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Di
W6	-	BZT52C4V3T	Zener diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 150mW	SOD-523	6d	1a	Di
W6	-	BZX384C3V9-F	Zener diode	3.7..4.1V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
W6	-	BZX384C3V9-V	Zener diode	3.9V±5%, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	2m	Vs
W6	-	BZX584C3V9	Zener diode	3.7..4.1V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	7d	1a	Pjt
W6	-	BZX784C3V9	Zener diode	3.71..4.10V, Zzt=90Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
W6	-	CZRW55C4V3-G	Zener diode	4.3..4.60V, Zzt=90Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
W6	-	FES3J	Si-diode	U-fast Recovery, 600V, 3A, <50ns	DO-214AB	1d	2j	Fag
W6	-	LBZT52C4V3T1G	Zener diode	4..4.6 5V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
W6	-	MEZ02-3.9-D3	Zener diode	3.71..4.10V, Izt=5mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Mts
W6	-	MM3Z4V3	Zener diode	4.0..4.6V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Sec
W6	ag	BZT52C4V3	Zener diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1d	Di
W6	ag	BZT52C4V3S	Zener diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Di
W7	-	BZT52B4V3	Zener diode	4.3V±2%, Izt=5mA, Zzt=90Ω, 410mW	SOD-123	5d	1b	Pjt
W7	-	BZT52C4V3-F	Zener diode	4.0..4.6V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
W7	-	BZT52C4V3S	Zener diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1b	Pjt
W7	-	BZT52C4V3-V	Zener diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1k	Vs
W7	-	BZT52C4V3WS	Zener diode	4.09..4.52V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
W7	-	BZT52C4V3WT	Zener diode	4.09..4.52V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Ttr
W7	-	BZT52C4V3WU	Zener diode	4.09..4.52V, Izt=5mA, Zzt=90Ω, 200mW	SOD-723	7d	1a	Ttr
W7	-	BZT52C4V7	Zener diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1d	Di
W7	-	BZT52C4V7S	Zener diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Di
W7	-	BZT52C4V7T	Zener diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 150mW	SOD-523	6d	1a	Di
W7	-	BZX384C4V3-F	Zener diode	4.0..4.6V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
W7	-	BZX384C4V3-V	Zener diode	4.3V±5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	2m	Vs
W7	-	BZX584C4V3	Zener diode	4.0..4.6V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	7d	1a	Pjt
W7	-	BZX784C4V3	Zener diode	4.09..4.52V, Zzt=90Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
W7	-	CZRW55C4V7-G	Zener diode	4.7..5.0V, Zzt=80Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
W7	-	LBZT52C4V7T1G	Zener diode	4.4..5V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
W7	-	MEZ02-4.3-D3	Zener diode	4.09..4.52V, Izt=5mA, Zzt=95Ω, 200mW	SOD-323	5d	1a	Mts
W7	-	MM3Z4V7	Zener diode	4.4..5.0V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Sec
W7	ag	BZT52C4V7	Zener diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1d	Di
W7	ag	BZT52C4V7S	Zener diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Di
W7S	-	BZT52B4V3S	Zener diode	4.21..4.39V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Mco
W8	-	BZT52B4V7	Zener diode	4.7V±2%, Izt=5mA, Zzt=80Ω, 410mW	SOD-123	5d	1b	Pjt
W8	-	BZT52B4V7S	Zener diode	4.61..4.79V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Mco
W8	-	BZT52C22WT	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 200mW	SOD-523	6d	1a	Ttr
W8	-	BZT52C4V7-F	Zener diode	4.4..5.0V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
W8	-	BZT52C4V7S	Zener diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1b	Pjt
W8	-	BZT52C4V7-V	Zener diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1k	Vs
W8	-	BZT52C4V7WS	Zener diode	4.47..4.94V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
W8	-	BZT52C4V7WT	Zener diode	4.47..4.94V, Izt=5mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Ttr
W8	-	BZT52C4V7WU	Zener diode	4.47..4.94V, Izt=5mA, Zzt=80Ω, 200mW	SOD-723	7d	1a	Ttr
W8	-	BZT52C5V1	Zener diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 500mW	SOD-123	5d	1d	Di
W8	-	BZT52C5V1S	Zener diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	1a	Di
W8	-	BZT52C5V1T	Zener diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 150mW	SOD-523	6d	1a	Di
W8	-	BZX384C4V7-F	Zener diode	4.4..5.0V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
W8	-	BZX384C4V7-V	Zener diode	4.7V±5%, Izt=5mA, Zzt=50Ω, 200mW	SOD-323	5d	2m	Vs
W8	-	BZX584C4V7	Zener diode	4.4..5.0V, Izt=5mA, Zzt=80Ω, 200mW	SOD-523	7d	1a	Pjt
W8	-	BZX784C4V7	Zener diode	4.47..4.94V, Zzt=80Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
W8	-	CZRW55C5V1-G	Zener diode	5.1..5.40V, Zzt=60Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
W8	-	LBZT52C5V1T1G	Zener diode	4.8..5.4V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
W8	-	MEZ02-4.7-D3	Zener diode	4.47..4.94V, Izt=5mA, Zzt=78Ω, 200mW	SOD-323	5d	1a	Mts
W8	-	MM3Z5V1	Zener diode	4.8..5.4V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	1a	Sec
W8	-	MM5Z22H	Zener diode	20.8..23.3V, Izt=2mA, Zzt=55Ω, 200mW	SOD-523	6d	1a	Zow
W8	-	MM5Z22V	Zener diode	22V±5%, Izt=5mA, Zzt=55Ω, 200mW	SOD-523	6d	1a	Eic
W8	ag	BZT52C5V1	Zener diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 500mW	SOD-123	5d	1d	Di
W8	ag	BZT52C5V1S	Zener diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	1a	Di
W9	-	BZT52B5V1	Zener diode	5.1V±2%, Izt=5mA, Zzt=60Ω, 410mW	SOD-123	5d	1b	Pjt
W9	-	BZT52B5V1S	Zener diode	5.0..5.2V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	1a	Mco
W9	-	BZT52C5V1-F	Zener diode	4.8..5.4V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
W9	-	BZT52C5V1S	Zener diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	1b	Pjt
W9	-	BZT52C5V1-V	Zener diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 500mW	SOD-123	5d	1k	Vs
W9	-	BZT52C5V1WS	Zener diode	4.85..5.36V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
W9	-	BZT52C5V1WT	Zener diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 200mW	SOD-523	6d	1a	Ttr
W9	-	BZT52C5V1WU	Zener diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 200mW	SOD-723	7d	1a	Ttr
W9	-	BZT52C5V6	Zener diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1d	Di
W9	-	BZT52C5V6S	Zener diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Di
W9	-	BZX384C5V1-F	Zener diode	4.8..5.4V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
W9	-	BZX384C5V1-V	Zener diode	5.1V±5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	2m	Vs
W9	-	BZX584C5V1	Zener diode	4.8..5.4V, Izt=5mA, Zzt=60Ω, 200mW	SOD-523	7d	1a	Pjt
W9	-	BZX784C5V1	Zener diode	4.85..5.36V, Zzt=60Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
W9	-	CZRW55C5V6-G	Zener diode	5.6..6.0V, Zzt=40Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
W9	-	LBZT52C5V6T1G	Zener diode	5.2..6V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
W9	-	MEZ02-5.1-D3	Zener diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 200mW	SOD-323	5d	1a	Mts
W9	-	MM3Z5V6	Zener diode	5.2..6.0V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Sec
W9	ag	BZT52C5V6	Zener diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1d	Di
W9	ag	BZT52C5V6S	Zener diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Di
W9	ag	BZT52C5V6T	Zener diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 150mW	SOD-523	6d	1a	Di
WA	-	BZT52B5V6	Zener diode	5.6V±2%, Izt=5mA, Zzt=40Ω, 410mW	SOD-123	5d	1b	Pjt
WA	-	BZT52B5V6S	Zener diode	5.49..5.71V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Mco
WA	-	BZT52C5V6-F	Zener diode	5.2..6.0V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WA	-	BZT52C5V6S	Zener diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1b	Pjt
WA	-	BZT52C5V6-V	Zener diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1k	Vs
WA	-	BZT52C5V6WS	Zener diode	5.32..5.88V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
WA	-	BZT52C5V6WT	Zener diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523	6d	1a	Ttr
WA	-	BZT52C5V6WU	Zener diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 200mW	SOD-723	7d	1a	Ttr
WA	-	BZT52C6V2	Zener diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 500mW	SOD-123	5d	1d	Di
WA	-	BZT52C6V2S	Zener diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Di
WA	-	BZX384C5V6-F	Zener diode	5.2..6.0V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WA	-	BZX384C5V6-V	Zener diode	5.6V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	2m	Vs
WA	-	BZX584C5V6	Zener diode	5.2..6.0V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523	7d	1a	Pjt
WA	-	BZX784C5V6	Zener diode	5.32..5.88V, Zzt=40Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WA	-	CZRW55C6V2-G	Zener diode	6.2..6.60V, Zzt=10Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
WA	-	LBZT52C6V2T1G	Zener diode	5.8..6.6V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
WA	-	MEZ02-5.6-D3	Zener diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Mts
WA	-	MM3Z6V2	Zener diode	5.8..6.6V, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Sec
WA	-	P4SMA82C	TVS	Vbr=77.9..86.1V, Vrwm=70.1V, 3.7A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
WA	-	PZU10BA/DG	Zener diode	10V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WA	-	SMZG3789A	Zener diode	10V±5%, 125mA, Zzt=5Ω, 1.5W	DO-215AA	5d	1k	Vs
WA	-	SMZJ3789A	Zener diode	10V±5%, 125mA, Zzt=5Ω, 1.5W	DO-214AA	1d	1k	Vs
WA	ag	BZT52C6V2	Zener diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 500mW	SOD-123	5d	1d	Di
WA	ag	BZT52C6V2S	Zener diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Di
WA	ag	BZT52C6V2T	Zener diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 150mW	SOD-523	6d	1a	Di
WB	-	BZT52B6V2	Zener diode	6.2V±2%, Izt=5mA, Zzt=10Ω, 410mW	SOD-123	5d	1b	Pjt
WB	-	BZT52B6V2S	Zener diode	6.08..6.32V, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Mco
WB	-	BZT52C6V2-F	Zener diode	5.8..6.6V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WB	-	BZT52C6V2S	Zener diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1b	Pjt
WB	-	BZT52C6V2-V	Zener diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 500mW	SOD-123	5d	1k	Vs
WB	-	BZT52C6V2WS	Zener diode	5.89..6.51V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WB	-	BZT52C6V2WT	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 200mW	SOD-523	6d	1a	Ttr
WB	-	BZT52C6V2WU	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 200mW	SOD-723	7d	1a	Ttr
WB	-	BZT52C6V8	Zener diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1d	Di
WB	-	BZT52C6V8S	Zener diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Di
WB	-	BZX384C6V2-F	Zener diode	5.8..6.6V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WB	-	BZX384C6V2-V	Zener diode	6.2V±5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	2m	Vs
WB	-	BZX584C6V2	Zener diode	5.8..6.6V, Izt=5mA, Zzt=10Ω, 200mW	SOD-523	7d	1a	Pjt
WB	-	BZX784C6V2	Zener diode	5.89..6.51V, Zzt=10Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WB	-	CZRW55C6V8-G	Zener diode	6.8..7.20V, Zzt=15Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
WB	-	KDZ13B	Zener diode	13V±2.5%, 20mA, 1W	PMDU	7d	1s	Rhm
WB	-	LBZT52C6V8T1G	Zener diode	6.4..7.2V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
WB	-	MEZ02-6.2-D3	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Mts
WB	-	MM3Z10VS	Zener diode	9.80..10.20V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323FL	7d	1u	Ons
WB	-	MM3Z6V8	Zener diode	6.4..7.2V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Sec
WB	-	PZU10B1A/DG	Zener diode	10V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WB	-	SMZG3789B	Zener diode	10V±10%, 125mA, Zzt=5Ω, 1.5W	DO-215AA	5d	1k	Vs
WB	-	SMZJ3789B	Zener diode	10V±10%, 125mA, Zzt=5Ω, 1.5W	DO-214AA	1d	1k	Vs
WB	ag	BZT52C6V8	Zener diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1d	Di
WB	ag	BZT52C6V8S	Zener diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Di
WB	ag	BZT52C6V8T	Zener diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 150mW	SOD-523	6d	1a	Di
WC	-	BZT52B6V8	Zener diode	6.8V±2%, Izt=5mA, Zzt=15Ω, 410mW	SOD-123	5d	1b	Pjt
WC	-	BZT52B6V8S	Zener diode	6.66..6.94V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Mco
WC	-	BZT52C6V8-F	Zener diode	6.4..7.2V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WC	-	BZT52C6V8S	Zener diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1b	Pjt
WC	-	BZT52C6V8-V	Zener diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1k	Vs
WC	-	BZT52C6V8WS	Zener diode	6.46..7.14V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WC	-	BZT52C6V8WT	Zener diode	6.46..7.14V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Ttr
WC	-	BZT52C6V8WU	Zener diode	6.46..7.14V, Izt=5mA, Zzt=15Ω, 200mW	SOD-723	7d	1a	Ttr
WC	-	BZT52C7V5	Zener diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1d	Di
WC	-	BZT52C7V5S	Zener diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Di
WC	-	BZX384C6V8-F	Zener diode	6.4..7.2V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WC	-	BZX384C6V8-V	Zener diode	6.8V±5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	2m	Vs
WC	-	BZX584C6V8	Zener diode	6.4..7.2V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	7d	1a	Pjt
WC	-	BZX784C6V8	Zener diode	6.46..7.14V, Zzt=15Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WC	-	CZRW55C7V5-G	Zener diode	7.5..7.90V, Zzt=15Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
WC	-	LBZT52C7V5T1G	Zener diode	7..7.9V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
WC	-	MM3Z11VS	Zener diode	10.78..11.22V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323FL	7d	1u	Ons
WC	-	MM3Z7V5	Zener diode	7.0..7.9V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Sec
WC	-	P4SMA91C	TVS	Vbr=86.5..95.5V, Vrwm=77.8V, 3.4A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
WC	-	PZU10B2A/DG	Zener diode	10V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WC	-	SMZG3790A	Zener diode	11V±5%, 115mA, Zzt=6Ω, 1.5W	DO-215AA	5d	1k	Vs
WC	-	SMZJ3790A	Zener diode	11V±5%, 115mA, Zzt=6Ω, 1.5W	DO-214AA	1d	1k	Vs
WC	-	TV04A4V0JB-G	TVS	Vrwm=4.0V, Vbr=5.89..6.51V, Ipp=46.50A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WC	ag	BZT52C7V5	Zener diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1d	Di
WC	ag	BZT52C7V5S	Zener diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Di

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
WC	ag	BZT52C7V5T	Zener diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 150mW	SOD-523	6d	1a	Di
WD	-	BZT52B7V5	Zener diode	7.5V±2%, Izt=5mA, Zzt=15Ω, 410mW	SOD-123	5d	1b	Pjt
WD	-	BZT52B7V5S	Zener diode	7.35..7.65V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Mco
WD	-	BZT52C7V5-F	Zener diode	7.0..7.9V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WD	-	BZT52C7V5S	Zener diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1b	Pjt
WD	-	BZT52C7V5-V	Zener diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1k	Vs
WD	-	BZT52C7V5WS	Zener diode	7.13..7.88V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WD	-	BZT52C7V5WT	Zener diode	7.13..7.88V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Ttr
WD	-	BZT52C7V5WU	Zener diode	7.13..7.88V, Izt=5mA, Zzt=15Ω, 200mW	SOD-723	7d	1a	Ttr
WD	-	BZT52C8V2	Zener diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1d	Di
WD	-	BZT52C8V2S	Zener diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Di
WD	-	BZX384C7V5-F	Zener diode	7.0..7.9V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WD	-	BZX384C7V5-V	Zener diode	7.5V±5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	2m	Vs
WD	-	BZX584C7V5	Zener diode	7.0..7.9V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	7d	1a	Pjt
WD	-	BZX784C7V5	Zener diode	7.13..7.88V, Zzt=15Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WD	-	CZRW55C8V2-G	Zener diode	8.2..8.70V, Zzt=15Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
WD	-	LBZT52C8V2T1G	Zener diode	7.7..8.7V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
WD	-	MEZ02-7.5-D3	Zener diode	7.13..7.88V, Izt=5mA, Zzt=7Ω, 200mW	SOD-323	5d	1a	Mts
WD	-	MM3Z8V2	Zener diode	7.7..8.7V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Sec
WD	-	P4SMAJ5.0C	TVS	Vrwm=5V, 41.6A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WD	-	P4SMAJ54C	TVS	Vrwm=54V, 4.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WD	-	PZU10B3A/DG	Zener diode	10V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WD	-	SMAJ5.0C	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 41.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WD	-	SMZG3790B	Zener diode	11V±10%, 115mA, Zzt=6Ω, 1.5W	DO-215AA	5d	1k	Vs
WD	-	SMZJ3790B	Zener diode	11V±10%, 115mA, Zzt=6Ω, 1.5W	DO-214AA	1d	1k	Vs
WD	-	TV04A5V0KB-G	TVS	Vrwm=5.0V, Vbr=6.40..7.30V, Ipp=41.67A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WD	ag	BZT52C8V2	Zener diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1d	Di
WD	ag	BZT52C8V2S	Zener diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Di
WD	ag	BZT52C8V2T	Zener diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 150mW	SOD-523	6d	1a	Di
WE	-	BZT52B8V2	Zener diode	8.2V±2%, Izt=5mA, Zzt=15Ω, 410mW	SOD-123	5d	1b	Pjt
WE	-	BZT52B8V2S	Zener diode	8.04..8.36V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Mco
WE	-	BZT52C8V2-F	Zener diode	7.7..8.7V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WE	-	BZT52C8V2S	Zener diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1b	Pjt
WE	-	BZT52C8V2-V	Zener diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1k	Vs
WE	-	BZT52C8V2WS	Zener diode	7.79..8.61V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WE	-	BZT52C8V2WT	Zener diode	7.79..8.61V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Ttr
WE	-	BZT52C8V2WU	Zener diode	7.79..8.61V, Izt=5mA, Zzt=15Ω, 200mW	SOD-723	7d	1a	Ttr
WE	-	BZT52C9V1	Zener diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1d	Di
WE	-	BZT52C9V1S	Zener diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Di
WE	-	BZX384C8V2-F	Zener diode	7.7..8.7V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WE	-	BZX384C8V2-V	Zener diode	8.2V±5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	2m	Vs
WE	-	BZX584C8V2	Zener diode	7.7..8.7V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	7d	1a	Pjt
WE	-	BZX784C8V2	Zener diode	7.79..8.61V, Zzt=15Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WE	-	CD214A-T54CA	TVS	Vrwm=54V, Irsm=4.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
WE	-	CZRW55C9V1-G	Zener diode	9.1..9.60V, Zzt=15Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
WE	-	LBZT52C9V1T1G	Zener diode	8.5..9.6V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
WE	-	MEZ02-6.8-D3	Zener diode	6.46..7.14V, Izt=5mA, Zzt=8Ω, 200mW	SOD-323	5d	1a	Mts
WE	-	MEZ02-8.2-D3	Zener diode	7.79..8.61V, Izt=5mA, Zzt=7Ω, 200mW	SOD-323	5d	1a	Mts
WE	-	MM3Z9V1	Zener diode	8.5..9.6V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Sec
WE	-	P4SMA100C	TVS	Vbr=95.0..105V, Vrwm=85.5V, 3.1A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
WE	-	P4SMAJ5.0CA	TVS	Vrwm=5V, 43.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WE	-	P4SMAJ54CA	TVS	Vrwm=54V, 4.6A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WE	-	PMF5.0CA	TVS	Vbr=6.40..7.0V, Vrwm=5.0V, Ipp=21.7A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
WE	-	PZU11BA/DG	Zener diode	11V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WE	-	SMAJ5.0CA	TVS	Vrwm=5.0V, Vbr=6.40..7.0V, 43.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WE	-	SMAJ54CA	TVS	Vrwm=54V, Vbr=60.0..66.3V, 4.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
WE	-	SMZG3791A	Zener diode	12V±5%, 105mA, Zzt=7Ω, 1.5W	DO-215AA	5d	1k	Vs
WE	-	SMZJ3791A	Zener diode	12V±5%, 105mA, Zzt=7Ω, 1.5W	DO-214AA	1d	1k	Vs
WE	-	TV04A5V0JB-G	TVS	Vrwm=5.0V, Vbr=6.46..7.0V, Ipp=43.48A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WE	ag	BZT52C9V1	Zener diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1d	Di
WE	ag	BZT52C9V1S	Zener diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Di
WE	ag	BZT52C9V1T	Zener diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 150mW	SOD-523	6d	1a	Di
WF	-	BZT52B9V1	Zener diode	9.1V±2%, Izt=5mA, Zzt=15Ω, 410mW	SOD-123	5d	1b	Pjt
WF	-	BZT52B9V1S	Zener diode	8.92..9.28V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Mco
WF	-	BZT52C10	Zener diode	10V±5%, Izt=5mA, Zzt=20Ω, 500mW	SOD-123	5d	1d	Di
WF	-	BZT52C10S	Zener diode	10V±5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Di
WF	-	BZT52C9V1-F	Zener diode	8.5..9.6V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WF	-	BZT52C9V1S	Zener diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1b	Pjt
WF	-	BZT52C9V1-V	Zener diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1k	Vs
WF	-	BZT52C9V1WS	Zener diode	8.65..9.56V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
WF	-	BZT52C9V1WT	Zener diode	8.65..9.56V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Ttr
WF	-	BZT52C9V1WU	Zener diode	8.65..9.56V, Izt=5mA, Zzt=15Ω, 200mW	SOD-723	7d	1a	Ttr
WF	-	BZX384C9V1-F	Zener diode	8.5..9.6V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WF	-	BZX384C9V1-V	Zener diode	9.1V±5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	2m	Vs
WF	-	BZX584C9V1	Zener diode	8.5..9.6V, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	7d	1a	Pjt
WF	-	BZX784C9V1	Zener diode	8.65..9.56V, Zzt=15Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WF	-	CZRW55C10-G	Zener diode	10.0..10.60V, Zzt=20Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
WF	-	LBZT52C10T1G	Zener diode	9.4..10.6V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
WF	-	MEZ02-9.1-D3	Zener diode	8.65..9.56V, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	1a	Mts
WF	-	MM3Z10V	Zener diode	9.4..10.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Sec
WF	-	P4SMAJ58C	TVS	Vrwm=58V, 3.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WF	-	P4SMAJ6.0C	TVS	Vrwm=6V, 35.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WF	-	PZU11B1A/DG	Zener diode	11V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WF	-	SMAJ6.0C	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, 35.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WF	-	SMZG3791B	Zener diode	12V±10%, 105mA, Zzt=7Ω, 1.5W	DO-215AA	5d	1k	Vs
WF	-	SMZJ3791B	Zener diode	12V±10%, 105mA, Zzt=7Ω, 1.5W	DO-214AA	1d	1k	Vs
WF	-	TV04A6V0KB-G	TVS	Vrwm=6.0V, Vbr=6.67..8.15V, Ipp=35.09A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WF	ag	BZT52C10	Zener diode	10V±5%, Izt=5mA, Zzt=20Ω, 500mW	SOD-123	5d	1d	Di
WF	ag	BZT52C10S	Zener diode	10V±5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Di
WF	ag	BZT52C10T	Zener diode	10V±5%, Izt=5mA, Zzt=20Ω, 150mW	SOD-523	6d	1a	Di
WG	-	BZT52B10	Zener diode	10V±2%, Izt=5mA, Zzt=20Ω, 410mW	SOD-123	5d	1b	Pjt
WG	-	BZT52B10S	Zener diode	9.8..10.2V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Mco
WG	-	BZT52C10-F	Zener diode	9.4..10.6V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WG	-	BZT52C10S	Zener diode	10V±5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1b	Pjt
WG	-	BZT52C10-V	Zener diode	10V±5%, Izt=5mA, Zzt=20Ω, 500mW	SOD-123	5d	1k	Vs
WG	-	BZT52C10WS	Zener diode	9.50..10.50V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WG	-	BZT52C10WT	Zener diode	9.50..10.50V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523	6d	1a	Ttr
WG	-	BZT52C10WU	Zener diode	9.50..10.50V, Izt=5mA, Zzt=20Ω, 200mW	SOD-723	7d	1a	Ttr
WG	-	BZT52C11	Zener diode	11V±5%, Izt=5mA, Zzt=20Ω, 500mW	SOD-123	5d	1d	Di
WG	-	BZT52C11S	Zener diode	11V±5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Di
WG	-	BZX384C10-F	Zener diode	9.4..10.6V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WG	-	BZX384C10-V	Zener diode	10V±5%, Izt=5mA, Zzt=8Ω, 200mW	SOD-323	5d	2m	Vs
WG	-	BZX584C10	Zener diode	9.4..10.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523	7d	1a	Pjt
WG	-	CD214A-T58CA	TVS	Vrwm=58V, Irsm=4.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
WG	-	CZRW55C11-G	Zener diode	11.0..11.60V, Zzt=20Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
WG	-	LBZT52C11T1G	Zener diode	10.4..11.6V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
WG	-	MEZ02-10-D3	Zener diode	9.50..10.50V, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	1a	Mts
WG	-	MM3Z11V	Zener diode	10.4..11.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Sec
WG	-	P4SMA110C	TVS	Vbr=99.0..121V, Vrwm=89.2V, 2.7A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
WG	-	P4SMAJ58CA	TVS	Vrwm=58V, 4.3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WG	-	P4SMAJ6.0CA	TVS	Vrwm=6V, 38.8A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WG	-	PMF6.0CA	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, Ipp=19.4A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
WG	-	PZU11B2A/DG	Zener diode	11V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WG	-	SMA6J28CA	TVS	Vbr=31.1..34.4V, Vrwm=28V, Ipp=13.2A, 600W(1ms), Bidir.	DO-214AC	1ba	1j	Mco
WG	-	SMAJ58CA	TVS	Vrwm=58V, Vbr=64.4..71.2V, 4.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
WG	-	SMAJ6.0CA	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, 38.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WG	-	SMZG3792A	Zener diode	13V±5%, 98mA, Zzt=7.5Ω, 1.5W	DO-215AA	5d	1k	Vs
WG	-	SMZJ3792A	Zener diode	13V±5%, 98mA, Zzt=7.5Ω, 1.5W	DO-214AA	1d	1k	Vs
WG	-	TV04A6V0JB-G	TVS	Vrwm=6.0V, Vbr=6.67..7.37V, Ipp=38.83A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WG	ag	BZT52C11	Zener diode	11V±5%, Izt=5mA, Zzt=20Ω, 500mW	SOD-123	5d	1d	Di
WG	ag	BZT52C11S	Zener diode	11V±5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Di
WG	ag	BZT52C11T	Zener diode	11V±5%, Izt=5mA, Zzt=20Ω, 150mW	SOD-523	6d	1a	Di
WH	-	BZT52B11	Zener diode	11V±2%, Izt=5mA, Zzt=20Ω, 410mW	SOD-123	5d	1b	Pjt
WH	-	BZT52B11S	Zener diode	10.78..11.22V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Mco
WH	-	BZT52C11-F	Zener diode	10.4..11.6V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WH	-	BZT52C11S	Zener diode	11V±5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1b	Pjt
WH	-	BZT52C11-V	Zener diode	11V±5%, Izt=5mA, Zzt=20Ω, 500mW	SOD-123	5d	1k	Vs
WH	-	BZT52C11WS	Zener diode	10.45..11.55V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WH	-	BZT52C11WT	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523	6d	1a	Ttr
WH	-	BZT52C11WU	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 200mW	SOD-723	7d	1a	Ttr
WH	-	BZT52C12	Zener diode	12V±5%, Izt=5mA, Zzt=25Ω, 500mW	SOD-123	5d	1d	Di
WH	-	BZT52C12S	Zener diode	12V±5%, Izt=5mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Di
WH	-	BZX384C11-F	Zener diode	10.4..11.6V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WH	-	BZX384C11-V	Zener diode	11V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
WH	-	BZX584C11	Zener diode	10.4..11.6V, Izt=5mA, Zzt=20Ω, 200mW	SOD-523	7d	1a	Pjt
WH	-	BZX784C11	Zener diode	10.45..11.55V, Zzt=20Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WH	-	CZRW55C12-G	Zener diode	12.0..12.70V, Zzt=25Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
WH	-	LBZT52C12T1G	Zener diode	11.4..12.7V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
WH	-	MEZ02-11-D3	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Mts
WH	-	MM3Z12V	Zener diode	11.4..12.7V, Izt=5mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Sec

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
WH	-	P4SMAJ6.5C	TVS	Vrwm=6.5V, 32.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WH	-	P4SMAJ60C	TVS	Vrwm=60V, 3.7A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WH	-	PZU11B3A/DG	Zener diode	11V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WH	-	SMAJ6.5C	TVS	Vrwm=6.5V, Vbr=7.22..8.82V, 32.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WH	-	SMZG3792B	Zener diode	13V±10%, 98mA, Zzt=7.5Ω, 1.5W	DO-215AA	5d	1k	Vs
WH	-	SMZJ3792B	Zener diode	13V±10%, 98mA, Zzt=7.5Ω, 1.5W	DO-214AA	1d	1k	Vs
WH	-	TV04A6V5KB-G	TVS	Vrwm=6.50V, Vbr=7.22..8.82V, Ipp=32.52A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WH	ag	BZT52C12	Zener diode	12V±5%, Izt=5mA, Zzt=25Ω, 500mW	SOD-123	5d	1d	Di
WH	ag	BZT52C12S	Zener diode	12V±5%, Izt=5mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Di
WH	ag	BZT52C12T	Zener diode	12V±5%, Izt=5mA, Zzt=25Ω, 150mW	SOD-523	6d	1a	Di
WI	-	BZT52B12	Zener diode	12V±2%, Izt=5mA, Zzt=25Ω, 410mW	SOD-123	5d	1b	Pjt
WI	-	BZT52B12S	Zener diode	11.76..12.24V, Izt=5mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Mco
WI	-	BZT52C12-F	Zener diode	11.4..12.7V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WI	-	BZT52C12S	Zener diode	12V±5%, Izt=5mA, Zzt=25Ω, 200mW	SOD-323	5d	1b	Pjt
WI	-	BZT52C12-V	Zener diode	12V±5%, Izt=5mA, Zzt=25Ω, 500mW	SOD-123	5d	1k	Vs
WI	-	BZT52C12WS	Zener diode	11.40..12.60V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WI	-	BZT52C12WT	Zener diode	11.40..12.60V, Izt=5mA, Zzt=25Ω, 200mW	SOD-523	6d	1a	Ttr
WI	-	BZT52C12WU	Zener diode	11.40..12.60V, Izt=5mA, Zzt=25Ω, 200mW	SOD-723	7d	1a	Ttr
WI	-	BZT52C13	Zener diode	13V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1d	Di
WI	-	BZT52C13S	Zener diode	13V±5%, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Di
WI	-	BZX384C12-F	Zener diode	11.4..12.7V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WI	-	BZX384C12-V	Zener diode	12V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
WI	-	BZX584C12	Zener diode	11.4..12.7V, Izt=5mA, Zzt=25Ω, 200mW	SOD-523	7d	1a	Pjt
WI	-	BZX784C12	Zener diode	11.40..12.60V, Zzt=25Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WI	-	LBZT52C13T1G	Zener diode	12.4..14.1V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
WI	-	MEZ02-12-D3	Zener diode	11.40..12.60V, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	1a	Mts
WI	-	MM3Z13V	Zener diode	12.4..14.1V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Sec
WI	-	P4SMA120C	TVS	Vbr=114..126V, Vrwm=102V, 2.5A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
WI	-	SMZG3793A	Zener diode	15V±5%, 85mA, Zzt=9Ω, 1.5W	DO-215AA	5d	1k	Vs
WI	-	SMZJ3793A	Zener diode	15V±5%, 85mA, Zzt=9Ω, 1.5W	DO-214AA	1d	1k	Vs
WI	ag	BZT52C13	Zener diode	13V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1d	Di
WI	ag	BZT52C13S	Zener diode	13V±5%, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Di
WI	ag	BZT52C13T	Zener diode	13V±5%, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Di
WJ	-	BZT52C14WS	Zener diode	13.30..14.70V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WJ	-	BZT52C14WT	Zener diode	13.30..14.70V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	6d	1a	Ttr
WJ	-	BZT52C14WU	Zener diode	13.30..14.70V, Izt=5mA, Zzt=30Ω, 200mW	SOD-723	7d	1a	Ttr
WJ	-	BZT52C15	Zener diode	15V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1d	Di
WJ	-	BZT52C15S	Zener diode	15V±5%, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Di
WJ	-	BZX584C14	Zener diode	13.3..14.7V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	7d	1a	Pjt
WJ	-	BZX784C14	Zener diode	13.30..14.70V, Zzt=30Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WJ	-	CZRW55C15-G	Zener diode	15.0..15.60V, Zzt=30Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
WJ	-	LBZT52C15T1G	Zener diode	13.8..15.8V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
WJ	-	MM3Z15V	Zener diode	14.3..15.8V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Sec
WJ	-	SMZG3793B	Zener diode	15V±10%, 85mA, Zzt=9Ω, 1.5W	DO-215AA	5d	1k	Vs
WJ	-	SMZJ3793B	Zener diode	15V±10%, 85mA, Zzt=9Ω, 1.5W	DO-214AA	1d	1k	Vs
WJ	ag	BZT52C15	Zener diode	15V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1d	Di
WJ	ag	BZT52C15S	Zener diode	15V±5%, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Di
WJ	ag	BZT52C15T	Zener diode	15V±5%, Izt=5mA, Zzt=30Ω, 150mW	SOD-523	6d	1a	Di
WK	-	BZT52B13	Zener diode	13V±2%, Izt=5mA, Zzt=30Ω, 410mW	SOD-123	5d	1b	Pjt
WK	-	BZT52B13S	Zener diode	12.74..13.3V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Mco
WK	-	BZT52C13-F	Zener diode	12.4..14.1V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WK	-	BZT52C13S	Zener diode	13V±5%, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1b	Pjt
WK	-	BZT52C13-V	Zener diode	13V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1k	Vs
WK	-	BZT52C13WS	Zener diode	12.35..13.65V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WK	-	BZT52C13WT	Zener diode	12.35..13.65V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	6d	1a	Ttr
WK	-	BZT52C13WU	Zener diode	12.35..13.65V, Izt=5mA, Zzt=30Ω, 200mW	SOD-723	7d	1a	Ttr
WK	-	BZT52C16	Zener diode	16V±5%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1d	Di
WK	-	BZT52C16S	Zener diode	16V±5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Di
WK	-	BZX384C13-F	Zener diode	12.4..14.1V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WK	-	BZX384C13-V	Zener diode	13V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
WK	-	BZX584C13	Zener diode	12.4..14.1V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	7d	1a	Pjt
WK	-	BZX784C13	Zener diode	12.35..13.65V, Zzt=30Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WK	-	CD214A-T60CA	TVS	Vrwm=60V, Irsm=4.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
WK	-	CZRW55C16-G	Zener diode	16.0..17.10V, Zzt=40Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
WK	-	LBZT52C16T1G	Zener diode	15.3..17.1V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
WK	-	MEZ02-13-D3	Zener diode	12.35..13.65V, Izt=5mA, Zzt=25Ω, 200mW	SOD-323	5d	1a	Mts
WK	-	MM3Z16V	Zener diode	15.3..17.1V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Sec
WK	-	P4SMA130C	TVS	Vbr=124..137V, Vrwm=111V, 2.3A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
WK	-	P4SMAJ6.5CA	TVS	Vrwm=6.5V, 35.7A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WK	-	P4SMAJ60CA	TVS	Vrwm=60V, 4.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
WK	-	PMF6.5CA	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, Ipp=17.9A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
WK	-	PZU12BA/DG	Zener diode	12V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WK	-	SMAJ6.5CA	TVS	Vrwm=6.5V, Vbr=7.22..7.98V, 35.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WK	-	SMAJ60CA	TVS	Vrwm=60V, Vbr=66.7..73.7V, 4.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
WK	-	SMZG3794A	Zener diode	16V±5%, 80mA, Zzt=10Ω, 1.5W	DO-215AA	5d	1k	Vs
WK	-	SMZJ3794A	Zener diode	16V±5%, 80mA, Zzt=10Ω, 1.5W	DO-214AA	1d	1k	Vs
WK	-	TV04A6V5JB-G	TVS	Vrwm=6.50V, Vbr=7.22..7.98V, Ipp=35.71A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WK	ag	BZT52C16	Zener diode	16V±5%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1d	Di
WK	ag	BZT52C16S	Zener diode	16V±5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Di
WK	ag	BZT52C16T	Zener diode	16V±5%, Izt=5mA, Zzt=40Ω, 150mW	SOD-523	6d	1a	Di
WL	-	BZT52B15	Zener diode	15V±2%, Izt=5mA, Zzt=30Ω, 410mW	SOD-123	5d	1b	Pjt
WL	-	BZT52B15S	Zener diode	14.7..15.3V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Mco
WL	-	BZT52C15-F	Zener diode	13.8..15.6V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WL	-	BZT52C15S	Zener diode	15V±5%, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1b	Pjt
WL	-	BZT52C15-V	Zener diode	15V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1k	Vs
WL	-	BZT52C15WS	Zener diode	14.25..15.75V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WL	-	BZT52C15WT	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	6d	1a	Ttr
WL	-	BZT52C15WU	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 200mW	SOD-723	7d	1a	Ttr
WL	-	BZT52C18	Zener diode	18V±5%, Izt=5mA, Zzt=45Ω, 500mW	SOD-123	5d	1d	Di
WL	-	BZT52C18S	Zener diode	18V±5%, Izt=5mA, Zzt=45Ω, 200mW	SOD-323	5d	1a	Di
WL	-	BZX384C15-F	Zener diode	13.8..15.6V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WL	-	BZX384C15-V	Zener diode	15V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
WL	-	BZX584C15	Zener diode	14.3..15.8V, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	7d	1a	Pjt
WL	-	BZX784C15	Zener diode	14.25..15.75V, Zzt=30Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WI	-	CZRW55C13-G	Zener diode	13.0..14.10V, Zzt=30Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
WL	-	CZRW55C18-G	Zener diode	18.0..19.10V, Zzt=45Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
WL	-	LBZT52C18T1G	Zener diode	16.8..19.1V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
WL	-	MEZ02-15-D3	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 200mW	SOD-323	5d	1a	Mts
WL	-	MM3Z18V	Zener diode	16.8..19.1V, Izt=5mA, Zzt=45Ω, 200mW	SOD-323	5d	1a	Sec
WL	-	P4SMAJ64C	TVS	Vrwm=64V, 3.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WL	-	P4SMAJ7.0C	TVS	Vrwm=7V, 30.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WL	-	PZU12B1A/DG	Zener diode	12V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WL	-	SMAJ7.0C	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, 30.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WL	-	SMZG3794B	Zener diode	16V±10%, 80mA, Zzt=10Ω, 1.5W	DO-215AA	5d	1k	Vs
WL	-	SMZJ3794B	Zener diode	16V±10%, 80mA, Zzt=10Ω, 1.5W	DO-214AA	1d	1k	Vs
WL	-	TV04A7V0KB-G	TVS	Vrwm=7.0V, Vbr=7.78..9.51V, Ipp=30.08A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WL	ag	BZT52C18	Zener diode	18V±5%, Izt=5mA, Zzt=45Ω, 500mW	SOD-123	5d	1d	Di
WL	ag	BZT52C18S	Zener diode	18V±5%, Izt=5mA, Zzt=45Ω, 200mW	SOD-323	5d	1a	Di
WL	ag	BZT52C18T	Zener diode	18V±5%, Izt=5mA, Zzt=45Ω, 150mW	SOD-523	6d	1a	Di
WM	-	BZT52B16	Zener diode	16V±2%, Izt=5mA, Zzt=40Ω, 410mW	SOD-123	5d	1b	Pjt
WM	-	BZT52B16S	Zener diode	15.68..16.3V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Mco
WM	-	BZT52C16-F	Zener diode	15.3..17.1V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WM	-	BZT52C16S	Zener diode	16V±5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1b	Pjt
WM	-	BZT52C16-V	Zener diode	16V±5%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1k	Vs
WM	-	BZT52C16WS	Zener diode	15.20..16.80V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WM	-	BZT52C16WT	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523	6d	1a	Ttr
WM	-	BZT52C16WU	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 200mW	SOD-723	7d	1a	Ttr
WM	-	BZT52C20	Zener diode	20V±5%, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1d	Di
WM	-	BZT52C20S	Zener diode	20V±5%, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Di
WM	-	BZX384C16-F	Zener diode	15.3..17.1V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WM	-	BZX384C16-V	Zener diode	16V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
WM	-	BZX584C16	Zener diode	15.3..17.1V, Izt=5mA, Zzt=40Ω, 200mW	SOD-523	7d	1a	Pjt
WM	-	BZX784C16	Zener diode	15.20..16.80V, Zzt=40Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WM	-	CD214A-T64CA	TVS	Vrwm=64V, Irsm=3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
WM	-	CZRW55C20-G	Zener diode	20.0..21.20V, Zzt=55Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
WM	-	LBZT52C20T1G	Zener diode	18.8..21.2V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
WM	-	MEZ02-16-D3	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	1a	Mts
WM	-	MM3Z20V	Zener diode	18.8..21.2V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Sec
WM	-	P4SMA150C	TVS	Vbr=143..158V, Vrwm=128V, 2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
WM	-	P4SMAJ64CA	TVS	Vrwm=64V, 3.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WM	-	P4SMAJ7.0CA	TVS	Vrwm=7V, 33.3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WM	-	PMF7.0CA	TVS	Vbr=7.78..8.60V, Vrwm=7.0V, Ipp=16.7A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
WM	-	PZU12B2A/DG	Zener diode	12V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WM	-	SMAJ64CA	TVS	Vrwm=64V, Vbr=71.1..78.6V, 3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
WM	-	SMAJ7.0CA	TVS	Vrwm=7.0V, Vbr=7.78..8.6V, 33.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WM	-	TV04A7V0JB-G	TVS	Vrwm=7.0V, Vbr=7.78..8.60V, Ipp=33.33A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WM	ag	BZT52C20	Zener diode	20V±5%, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1d	Di
WM	ag	BZT52C20S	Zener diode	20V±5%, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Di
WM	ag	BZT52C20T	Zener diode	20V±5%, Izt=5mA, Zzt=55Ω, 150mW	SOD-523	6d	1a	Di
WN	-	BZT52B18	Zener diode	18V±2%, Izt=5mA, Zzt=45Ω, 410mW	SOD-123	5d	1b	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
WN	-	BZT52B18S	Zener diode	17.6..18.4V, Izt=5mA, Zzt=45Ω, 200mW	SOD-323	5d	1a	Mco
WN	-	BZT52C18-F	Zener diode	16.8..19.1V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WN	-	BZT52C18S	Zener diode	18V±5%, Izt=5mA, Zzt=45Ω, 200mW	SOD-323	5d	1b	Pjt
WN	-	BZT52C18-V	Zener diode	18V±5%, Izt=5mA, Zzt=45Ω, 500mW	SOD-123	5d	1k	Vs
WN	-	BZT52C18WS	Zener diode	17.10..18.90V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WN	-	BZT52C18WT	Zener diode	17.10..18.90V, Izt=5mA, Zzt=45Ω, 200mW	SOD-523	6d	1a	Ttr
WN	-	BZT52C18WU	Zener diode	17.10..18.90V, Izt=5mA, Zzt=45Ω, 200mW	SOD-723	7d	1a	Ttr
WN	-	BZT52C22	Zener diode	22V±5%, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1d	Di
WN	-	BZT52C22S	Zener diode	22V±5%, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Di
WN	-	BZX384C18-F	Zener diode	16.8..19.1V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WN	-	BZX384C18-V	Zener diode	18V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
WN	-	BZX584C18	Zener diode	16.8..19.1V, Izt=5mA, Zzt=45Ω, 200mW	SOD-523	7d	1a	Pjt
WN	-	BZX784C18	Zener diode	17.10..18.90V, Zzt=45Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WN	-	CZRW55C22-G	Zener diode	22.0..23.30V, Zzt=55Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
WN	-	LBZT52C22T1G	Zener diode	20.8..23.3V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
WN	-	MEZ02-18-D3	Zener diode	17.10..18.90V, Izt=5mA, Zzt=50Ω, 200mW	SOD-323	5d	1a	Mts
WN	-	MM3Z22V	Zener diode	20.8..23.3V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Sec
WN	-	P4SMAJ7.5C	TVS	Vrwm=7.5V, 28A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WN	-	P4SMAJ70C	TVS	Vrwm=70V, 3.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WN	-	PZU12B3A/DG	Zener diode	12V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WN	-	SM4T68C	TVS	Vrwm=68V, 4.3A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
WN	-	SMAJ7.5C	TVS	Vrwm=7.5V, Vbr=8.33..10.2V, 28A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WN	-	TV04A7V5KB-G	TVS	Vrwm=7.50V, Vbr=8.33..10.20V, Ipp=27.97A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WN	ag	BZT52C22	Zener diode	22V±5%, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1d	Di
WN	ag	BZT52C22S	Zener diode	22V±5%, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Di
WN	ag	BZT52C22T	Zener diode	22V±5%, Izt=5mA, Zzt=55Ω, 150mW	SOD-523	6d	1a	Di
WO	-	BZT52B20	Zener diode	20V±2%, Izt=5mA, Zzt=55Ω, 410mW	SOD-123	5d	1b	Pjt
WO	-	BZT52B20S	Zener diode	19.6..20.4V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Mco
WO	-	BZT52C20-F	Zener diode	18.8..21.2V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WO	-	BZT52C20S	Zener diode	20V±5%, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1b	Pjt
WO	-	BZT52C20-V	Zener diode	20V±5%, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1k	Vs
WO	-	BZT52C20WS	Zener diode	19.0..21.0V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WO	-	BZT52C20WT	Zener diode	19.0..21.0V, Izt=5mA, Zzt=55Ω, 200mW	SOD-523	6d	1a	Ttr
WO	-	BZT52C20WU	Zener diode	19.0..21.0V, Izt=5mA, Zzt=55Ω, 200mW	SOD-723	7d	1a	Ttr
WO	-	BZT52C24	Zener diode	24V±5%, Izt=5mA, Zzt=70Ω, 500mW	SOD-123	5d	1d	Di
WO	-	BZT52C24S	Zener diode	24V±5%, Izt=5mA, Zzt=70Ω, 200mW	SOD-323	5d	1a	Di
WO	-	BZX284-B2V4	Zener diode	2.4V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
WO	-	BZX384C20-F	Zener diode	18.8..21.2V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WO	-	BZX384C20-V	Zener diode	20V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	2m	Vs
WO	-	BZX584C20	Zener diode	18.8..21.2V, Izt=5mA, Zzt=55Ω, 200mW	SOD-523	7d	1a	Pjt
WO	-	BZX784C20	Zener diode	19.0..21.00V, Zzt=55Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WO	-	CZRW55C24-G	Zener diode	24.0..25.60V, Zzt=70Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
WO	-	LBZT52C24T1G	Zener diode	22.8..25.6V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
WO	-	MEZ02-20-D3	Zener diode	19.0..21.0V, Izt=5mA, Zzt=50Ω, 200mW	SOD-323	5d	1a	Mts
WO	-	MM3Z24V	Zener diode	22.8..25.6V, Izt=5mA, Zzt=70Ω, 200mW	SOD-323	5d	1a	Sec
WO	-	P4SMA160C	TVS	Vbr=152..168V, Vrwm=136V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
WO	ag	BZT52C24	Zener diode	24V±5%, Izt=5mA, Zzt=70Ω, 500mW	SOD-123	5d	1d	Di
WO	ag	BZT52C24S	Zener diode	24V±5%, Izt=5mA, Zzt=70Ω, 200mW	SOD-323	5d	1a	Di
WO	ag	BZT52C24T	Zener diode	24V±5%, Izt=5mA, Zzt=70Ω, 150mW	SOD-523	6d	1a	Di
WP	-	BZT52B22	Zener diode	22V±2%, Izt=5mA, Zzt=55Ω, 410mW	SOD-123	5d	1b	Pjt
WP	-	BZT52B22S	Zener diode	21.56..22.44V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Mco
WP	-	BZT52C22-F	Zener diode	20.8..23.3V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WP	-	BZT52C22S	Zener diode	22V±5%, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1b	Pjt
WP	-	BZT52C22-V	Zener diode	22V±5%, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1k	Vs
WP	-	BZT52C22WS	Zener diode	20.90..23.10V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WP	-	BZT52C22WT	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 200mW	SOD-523	6d	1a	Ttr
WP	-	BZT52C22WU	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 200mW	SOD-723	7d	1a	Ttr
WP	-	BZT52C27	Zener diode	27V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1d	Di
WP	-	BZT52C27S	Zener diode	27V±5%, Izt=2.5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Di
WP	-	BZX284-B2V7	Zener diode	2.7V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
WP	-	BZX384C22-F	Zener diode	20.8..23.3V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WP	-	BZX384C22-V	Zener diode	22V±5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	2m	Vs
WP	-	BZX584C22	Zener diode	20.8..23.3V, Izt=5mA, Zzt=55Ω, 200mW	SOD-523	7d	1a	Pjt
WP	-	BZX784C22	Zener diode	20.90..23.10V, Zzt=55Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WP	-	CD214A-T70CA	TVS	Vrwm=70V, Irsm=3.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
WP	-	CZRW55C27-G	Zener diode	27.0..28.90V, Zzt=80Ω, Izt=2mA, 500mW	SOD-123	5d	1a	Cmc
WP	-	LBZT52C27T1G	Zener diode	25.1..28.9V, Izt=2mA, 500mW	SOD-123	5d	1u	Lrc
WP	-	MEZ02-22-D3	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 200mW	SOD-323	5d	1a	Mts
WP	-	MM3Z27V	Zener diode	25.1..28.9V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Sec
WP	-	P4SMAJ7.5CA	TVS	Vrwm=7.5V, 31A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
WP	-	P4SMAJ70CA	TVS	Vrwm=70V, 3.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WP	-	PMF7.5CA	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, Ipp=15.5A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
WP	-	PZU13BA/DG	Zener diode	13V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WP	-	SM4T68CA	TVS	Vrwm=68V, 4.3A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
WP	-	SMAJ7.5CA	TVS	Vrwm=7.5V, Vbr=8.33..9.21V, 31A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WP	-	SMAJ70CA	TVS	Vrwm=70V, Vbr=77.8..86V, 3.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
WP	-	TV04A7V5JB-G	TVS	Vrwm=7.50V, Vbr=8.33..9.21V, Ipp=31.01A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WP	ag	BZT52C27	Zener diode	27V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1d	Di
WP	ag	BZT52C27S	Zener diode	27V±5%, Izt=2.5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Di
WQ	-	BZT52C30	Zener diode	30V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1d	Di
WQ	-	BZT52C30S	Zener diode	30V±5%, Izt=2.5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Di
WQ	-	BZX284-B3V0	Zener diode	3V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
WQ	-	CZRW55C30-G	Zener diode	30.0..32.0V, Zzt=80Ω, Izt=2mA, 500mW	SOD-123	5d	1a	Cmc
WQ	-	LBZT52C30T1G	Zener diode	28..32V, Izt=2mA, 500mW	SOD-123	5d	1u	Lrc
WQ	-	MM3Z30V	Zener diode	28..32V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Sec
WQ	-	P4SMA56CA	TVS	Vbr=53.2..58.8V, Vrwm=47.8V, 5.5A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
WQ	-	P4SMAJ75C	TVS	Vrwm=75V, 3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WQ	-	P4SMAJ8.0C	TVS	Vrwm=8V, 26.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WQ	-	SMAJ8.0C	TVS	Vrwm=8.0V, Vbr=8.89..10.9V, 26.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WQ	-	TV04A8V0KB-G	TVS	Vrwm=8.0V, Vbr=8.89..10.90V, Ipp=26.67A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WQ	ag	BZT52C30	Zener diode	30V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1d	Di
WQ	ag	BZT52C30S	Zener diode	30V±5%, Izt=2.5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Di
WR	-	BZT52B24	Zener diode	24V±2%, Izt=5mA, Zzt=70Ω, 410mW	SOD-123	5d	1b	Pjt
WR	-	BZT52B24S	Zener diode	23.52..24.5V, Izt=5mA, Zzt=70Ω, 200mW	SOD-323	5d	1a	Mco
WR	-	BZT52C24-F	Zener diode	22.8..25.6V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WR	-	BZT52C24S	Zener diode	24V±5%, Izt=5mA, Zzt=70Ω, 200mW	SOD-323	5d	1b	Pjt
WR	-	BZT52C24-V	Zener diode	24V±5%, Izt=5mA, Zzt=70Ω, 500mW	SOD-123	5d	1k	Vs
WR	-	BZT52C24WS	Zener diode	22.80..25.20V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WR	-	BZT52C24WT	Zener diode	22.80..25.20V, Izt=5mA, Zzt=70Ω, 200mW	SOD-523	6d	1a	Ttr
WR	-	BZT52C24WU	Zener diode	22.80..25.20V, Izt=5mA, Zzt=70Ω, 200mW	SOD-723	7d	1a	Ttr
WR	-	BZT52C33	Zener diode	33V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1d	Di
WR	-	BZT52C33S	Zener diode	33V±5%, Izt=2.5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Di
WR	-	BZX284-B3V3	Zener diode	3.3V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
WR	-	BZX384C24-F	Zener diode	22.8..25.6V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WR	-	BZX384C24-V	Zener diode	24V±5%, Izt=2mA, Zzt=25Ω, 200mW	SOD-323	5d	2m	Vs
WR	-	BZX584C24	Zener diode	22.8..25.6V, Izt=5mA, Zzt=70Ω, 200mW	SOD-523	7d	1a	Pjt
WR	-	BZX784C24	Zener diode	22.80..25.20V, Zzt=70Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WR	-	CD214A-T75CA	TVS	Vrwm=75V, Irsm=3.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
WR	-	CZRW55C33-G	Zener diode	33.0..35.0V, Zzt=80Ω, Izt=2mA, 500mW	SOD-123	5d	1a	Cmc
WR	-	LBZT52C33T1G	Zener diode	31..35V, Izt=2mA, 500mW	SOD-123	5d	1u	Lrc
WR	-	MEZ02-24-D3	Zener diode	22.80..25.20V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Mts
WR	-	MM3Z33V	Zener diode	31..35V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Sec
WR	-	P4SMA170C	TVS	Vbr=162..179V, Vrwm=145V, 1.8A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
WR	-	P4SMAJ75CA	TVS	Vrwm=75V, 3.3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WR	-	P4SMAJ8.0CA	TVS	Vrwm=8V, 29.4A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WR	-	PMF8.0CA	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, Ipp=14.7A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
WR	-	PZU13B1A/DG	Zener diode	13V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WR	-	SMAJ75CA	TVS	Vrwm=75V, Vbr=83.3..92.1V, 3.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
WR	-	SMAJ8.0CA	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, 29.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WR	-	TV04A8V0JB-G	TVS	Vrwm=8.0V, Vbr=8.89..9.83V, Ipp=29.41A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WR	ag	BZT52C33	Zener diode	33V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1d	Di
WR	ag	BZT52C33S	Zener diode	33V±5%, Izt=2.5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Di
WS	-	BZT52B27	Zener diode	27V±2%, Izt=5mA, Zzt=80Ω, 410mW	SOD-123	5d	1b	Pjt
WS	-	BZT52B27S	Zener diode	26.46..27.54V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Mco
WS	-	BZT52C27-F	Zener diode	25.1..28.9V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WS	-	BZT52C27S	Zener diode	27V±5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1b	Pjt
WS	-	BZT52C27-V	Zener diode	27V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1k	Vs
WS	-	BZT52C27WS	Zener diode	25.65..28.35V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WS	-	BZT52C27WT	Zener diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Ttr
WS	-	BZT52C27WU	Zener diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 200mW	SOD-723	7d	1a	Ttr
WS	-	BZT52C36	Zener diode	36V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1d	Di
WS	-	BZT52C36S	Zener diode	36V±5%, Izt=2.5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Di
WS	-	BZX284-B3V6	Zener diode	6V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
WS	-	BZX384C27-F	Zener diode	25.1..28.9V, Izt=2.0mA, 200mW	SOD-323F	7d	1a	Ttr
WS	-	BZX384C27-V	Zener diode	27V±5%, Izt=2mA, Zzt=25Ω, 200mW	SOD-323	5d	2m	Vs
WS	-	BZX584C27	Zener diode	25.1..28.9V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523	7d	1a	Pjt
WS	-	BZX784C27	Zener diode	25.65..28.35V, Zzt=80Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WS	-	CZRW55C36-G	Zener diode	36.0..38.0V, Zzt=90Ω, Izt=2mA, 500mW	SOD-123	5d	1a	Cmc
WS	-	LBZT52C36T1G	Zener diode	34..38V, Izt=2mA, 500mW	SOD-123	5d	1u	Lrc
WS	-	MEZ02-27-D3	Zener diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Mts

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
WS	-	MM3Z36V	Zener diode	34..38V, Izt=2mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Sec
WS	-	P4SMAJ78C	TVS	Vrwm=78V, 2.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WS	-	P4SMAJ8.5C	TVS	Vrwm=8.5V, 25.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WS	-	PZU13B2A/DG	Zener diode	13V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WS	-	SMAJ8.5C	TVS	Vrwm=8.5V, Vbr=9.44..11.5V, 25.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WS	-	TV04A8V5KB-G	TVS	Vrwm=8.55V, Vbr=9.44..11.50V, Ipp=25.16A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WS	ag	BZT52C36	Zener diode	36V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1d	Di
WS	ag	BZT52C36S	Zener diode	36V±5%, Izt=2.5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Di
WT	-	BZT52B30	Zener diode	30V±2%, Izt=5mA, Zzt=80Ω, 410mW	SOD-123	5d	1b	Pjt
WT	-	BZT52B30S	Zener diode	29.4..30.6V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Mco
WT	-	BZT52C30-F	Zener diode	28..32V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WT	-	BZT52C30S	Zener diode	30V±5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1b	Pjt
WT	-	BZT52C30-V	Zener diode	30V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1k	Vs
WT	-	BZT52C30WS	Zener diode	28.50..31.50V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WT	-	BZT52C30WT	Zener diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Ttr
WT	-	BZT52C30WU	Zener diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 200mW	SOD-723	7d	1a	Ttr
WT	-	BZT52C39	Zener diode	39V±5%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1d	Di
WT	-	BZT52C39S	Zener diode	39V±5%, Izt=2.5mA, Zzt=130Ω, 200mW	SOD-323	5d	1a	Di
WT	-	BZX284-B3V9	Zener diode	3.9V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
WT	-	BZX384C30-F	Zener diode	28.0..32.0V, Izt=2.0mA, 200mW	SOD-323F	7d	1a	Ttr
WT	-	BZX384C30-V	Zener diode	30V±5%, Izt=2mA, Zzt=30Ω, 200mW	SOD-323	5d	2m	Vs
WT	-	BZX584C30	Zener diode	28..32V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523	7d	1a	Pjt
WT	-	BZX784C30	Zener diode	28.50..31.50V, Zzt=80Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WT	-	CD214A-T78CA	TVS	Vrwm=78V, Irsm=3.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
WT	-	CZRW55C39-G	Zener diode	39.0..41.0V, Zzt=130Ω, Izt=2mA, 500mW	SOD-123	5d	1a	Cmc
WT	-	LBZT52C39T1G	Zener diode	37..41V, Izt=2mA, 500mW	SOD-123	5d	1u	Lrc
WT	-	MEZ02-30-D3	Zener diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Mts
WT	-	MM3Z39V	Zener diode	37..41V, Izt=2mA, Zzt=130Ω, 200mW	SOD-323	5d	1a	Sec
WT	-	P4SMA180C	TVS	Vbr=171..189V, Vrwm=154V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
WT	-	P4SMAJ78CA	TVS	Vrwm=78V, 2.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WT	-	P4SMAJ8.5CA	TVS	Vrwm=8.5V, 27.7A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WT	-	PMF8.5CA	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, Ipp=13.9A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
WT	-	PZU13B3A/DG	Zener diode	13V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WT	-	SMAJ78CA	TVS	Vrwm=78V, Vbr=86.7..95.8V, 3.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
WT	-	SMAJ8.5CA	TVS	Vrwm=8.5V, Vbr=9.44..10.4V, 27.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WT	-	TV04A8V5JB-G	TVS	Vrwm=8.55V, Vbr=9.44..10.40V, Ipp=27.78A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WT	ag	BZT52C39	Zener diode	39V±5%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1d	Di
WT	ag	BZT52C39S	Zener diode	39V±5%, Izt=2.5mA, Zzt=130Ω, 200mW	SOD-323	5d	1a	Di
WU	-	BZT52B33	Zener diode	33V±2%, Izt=5mA, Zzt=80Ω, 410mW	SOD-123	5d	1b	Pjt
WU	-	BZT52B33S	Zener diode	32.34..33.7V, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Mco
WU	-	BZT52C33-F	Zener diode	31..35V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WU	-	BZT52C33S	Zener diode	33V±5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1b	Pjt
WU	-	BZT52C33-V	Zener diode	33V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1k	Vs
WU	-	BZT52C33WS	Zener diode	31.35..34.65V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WU	-	BZT52C33WT	Zener diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Ttr
WU	-	BZT52C33WU	Zener diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 200mW	SOD-723	7d	1a	Ttr
WU	-	BZT52C43	Zener diode	43V±2%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1b	Mco
WU	-	BZX284-B4V3	Zener diode	4.3V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
WU	-	BZX384C33-F	Zener diode	31.0..35.0V, Izt=2.0mA, 200mW	SOD-323F	7d	1a	Ttr
WU	-	BZX384C33-V	Zener diode	33V±5%, Izt=2mA, Zzt=35Ω, 200mW	SOD-323	5d	2m	Vs
WU	-	BZX584C33	Zener diode	31..35V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523	7d	1a	Pjt
WU	-	BZX784C33	Zener diode	31.35..34.65V, Zzt=80Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WU	-	LBZT52C43T1G	Zener diode	40..46V, Izt=2mA, 500mW	SOD-123	5d	1u	Lrc
WU	-	MEZ02-33-D3	Zener diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	1a	Mts
WU	-	MM3Z43V	Zener diode	40..46V, Izt=2mA, Zzt=150Ω, 200mW	SOD-323	5d	1a	Sec
WU	-	P4SMAJ85C	TVS	Vrwm=85V, 2.6A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WU	-	P4SMAJ9.0C	TVS	Vrwm=9V, 23.6A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WU	-	PZU14B2A/DG	Zener diode	14V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WU	-	SMAJ9.0C	TVS	Vrwm=9.0V, Vbr=10.0..12.2V, 23.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WU	-	TV04A9V0KB-G	TVS	Vrwm=9.0V, Vbr=10.0..12.20V, Ipp=23.67A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WV	-	BZX284-B4V7	Zener diode	4.7V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
WV	-	CD214A-T85CA	TVS	Vrwm=85V, Irsm=2.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
WV	-	LBZT52C47T1G	Zener diode	44..50V, Izt=2mA, 500mW	SOD-123	5d	1u	Lrc
WV	-	MM3Z47V	Zener diode	44..50V, Izt=2mA, Zzt=170Ω, 200mW	SOD-323	5d	1a	Sec
WV	-	P4SMA200C	TVS	Vbr=190..210V, Vrwm=171V, 1.53A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
WV	-	P4SMAJ85CA	TVS	Vrwm=85V, 2.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WV	-	P4SMAJ9.0CA	TVS	Vrwm=9V, 26A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WV	-	PMF9.0CA	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, Ipp=13.0A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
WV	-	PZU15BA/DG	Zener diode	15V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WV	-	SMAJ85CA	TVS	Vrwm=85V, Vbr=94.4..104V, 2.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
WV	-	SMAJ9.0CA	TVS	Vrwm=9.0V, Vbr=10.0..11.1V, 26A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WV	-	TV04A9V0JB-G	TVS	Vrwm=9.0V, Vbr=10.0..11.10V, Ipp=25.97A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WW	-	BZT52B36	Zener diode	36V±2%, Izt=5mA, Zzt=90Ω, 410mW	SOD-123	5d	1b	Pjt
WW	-	BZT52B36S	Zener diode	35.28..36.72V, Izt=2mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Mco
WW	-	BZT52C36-F	Zener diode	34..38V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WW	-	BZT52C36S	Zener diode	36V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1b	Pjt
WW	-	BZT52C36-V	Zener diode	36V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1k	Vs
WW	-	BZT52C36WS	Zener diode	34.20..37.80V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WW	-	BZT52C36WT	Zener diode	34.20..37.80V, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Ttr
WW	-	BZT52C36WU	Zener diode	34.20..37.80V, Izt=5mA, Zzt=90Ω, 200mW	SOD-723	7d	1a	Ttr
WW	-	BZX284-B5V1	Zener diode	5.1V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
WW	-	BZX384C36-F	Zener diode	34.0..38.0V, Izt=2.0mA, 200mW	SOD-323F	7d	1a	Ttr
WW	-	BZX384C36-V	Zener diode	36V±5%, Izt=2mA, Zzt=35Ω, 200mW	SOD-323	5d	2m	Vs
WW	-	BZX584C36	Zener diode	34..38V, Izt=2mA, Zzt=90Ω, 200mW	SOD-523	7d	1a	Pjt
WW	-	BZX784C36	Zener diode	34.20..37.80V, Zzt=90Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WW	-	LBZT52C51T1G	Zener diode	48..54V, Izt=2mA, 500mW	SOD-123	5d	1u	Lrc
WW	-	MEZ02-36-D3	Zener diode	34.20..37.80V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Mts
WW	-	MM3Z51V	Zener diode	48..54V, Izt=2mA, Zzt=180Ω, 200mW	SOD-323	5d	1a	Sec
WW	-	P4SMAJ10C	TVS	Vrwm=10V, 21.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WW	-	P4SMAJ90C	TVS	Vrwm=90V, 2.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WW	-	PZU15B1A/DG	Zener diode	15V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WW	-	SM4T100C	TVS	Vrwm=100V, 2.9A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
WW	-	SMAJ10C	TVS	Vrwm=10V, Vbr=11.1..12.3V, 21.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WW	-	TV04A100KB-G	TVS	Vrwm=10.0V, Vbr=11.10..13.60V, Ipp=21.28A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WX	-	BZT52B39	Zener diode	39V±2%, Izt=5mA, Zzt=90Ω, 410mW	SOD-123	5d	1b	Pjt
WX	-	BZT52B39S	Zener diode	38.22..39.8V, Izt=2mA, Zzt=130Ω, 200mW	SOD-323	5d	1a	Mco
WX	-	BZT52C2V4	Zener diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1d	Di
WX	-	BZT52C2V4S	Zener diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Di
WX	-	BZT52C2V4T	Zener diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Di
WX	-	BZT52C39-F	Zener diode	37..41V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WX	-	BZT52C39S	Zener diode	39V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1b	Pjt
WX	-	BZT52C39-V	Zener diode	39V±5%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1k	Vs
WX	-	BZT52C39WS	Zener diode	37.05..40.95V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WX	-	BZT52C39WT	Zener diode	37.05..40.95V, Izt=5mA, Zzt=130Ω, 200mW	SOD-523	6d	1a	Ttr
WX	-	BZT52C39WU	Zener diode	37.05..40.95V, Izt=5mA, Zzt=130Ω, 200mW	SOD-723	7d	1a	Ttr
WX	-	BZX284-B5V6	Zener diode	5.6V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
WX	-	BZX384C39-F	Zener diode	37.0..41.0V, Izt=2.0mA, 200mW	SOD-323F	7d	1a	Ttr
WX	-	BZX384C39-V	Zener diode	39V±5%, Izt=2mA, Zzt=40Ω, 200mW	SOD-323	5d	2m	Vs
WX	-	BZX584C39	Zener diode	37..41V, Izt=2mA, Zzt=130Ω, 200mW	SOD-523	7d	1a	Pjt
WX	-	BZX784C39	Zener diode	37.05..40.95V, Zzt=130Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WX	-	CD214A-T90CA	TVS	Vrwm=90V, Irsm=2.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
WX	-	CZRW55C2V4-G	Zener diode	2.4..2.60V, Zzt=100Ω, Izt=5mA, 500mW	SOD-123	5d	1a	Cmc
WX	-	LBZT52C2V4T1G	Zener diode	2.2..2.6V, Izt=5mA, 500mW	SOD-123	5d	1u	Lrc
WX	-	MEZ02-39-D3	Zener diode	37.05..40.95V, Izt=5mA, Zzt=90Ω, 200mW	SOD-323	5d	1a	Mts
WX	-	MM3Z2V4	Zener diode	2.2..2.6V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Sec
WX	-	P4SMA220C	TVS	Vbr=209..231V, Vrwm=185V, 1.22A, 400W(1ms), Bidir.	DO-214AC	1ba	2k	Fag
WX	-	P4SMAJ10CA	TVS	Vrwm=10V, 23.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WX	-	P4SMAJ90CA	TVS	Vrwm=90V, 2.7A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WX	-	PMF10CA	TVS	Vbr=11.1..12.3V, Vrwm=10V, Ipp=11.8A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
WX	-	PZU15B2A/DG	Zener diode	15V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WX	-	SM4T100CA	TVS	Vrwm=100V, 2.9A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
WX	-	SMAJ10CA	TVS	Vrwm=10V, Vbr=11.1..12.3V, 23.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WX	-	SMAJ90CA	TVS	Vrwm=90V, Vbr=100..111V, 2.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
WX	-	TV04A100JB-G	TVS	Vrwm=10.0V, Vbr=11.10..12.30V, Ipp=23.53A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WX	ag	BZT52C2V4	Zener diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1d	Di
WX	ag	BZT52C2V4S	Zener diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Di
WY	-	BZT52C2V0	Zener diode	2V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1d	Di
WY	-	BZT52C2V0S	Zener diode	2V±5%, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Di
WY	-	BZT52C2V0T	Zener diode	2.0V±5%, Izt=5mA, Zzt=100Ω, 150mW	SOD-523	6d	1a	Di
WY	-	BZT52C43	Zener diode	43V±2%, Izt=5mA, Zzt=100Ω, 410mW	SOD-123	5d	1b	Pjt
WY	-	BZT52C43-F	Zener diode	40..46V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WY	-	BZT52C43S	Zener diode	43V±5%, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1b	Pjt
WY	-	BZT52C43-V	Zener diode	43V±5%, Izt=5mA, Zzt=60Ω, 500mW	SOD-123	5d	1k	Vs
WY	-	BZT52C43WS	Zener diode	40.85..45.15V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WY	-	BZT52C43WT	Zener diode	40.85..45.15V, Izt=5mA, Zzt=150Ω, 200mW	SOD-523	6d	1a	Ttr
WY	-	BZT52C43WU	Zener diode	40.85..45.15V, Izt=5mA, Zzt=150Ω, 200mW	SOD-723	7d	1a	Ttr
WY	-	BZX284-B6V2	Zener diode	6.2V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
WY	-	BZX384C43-F	Zener diode	40.0..46.0V, Izt=2.0mA, 200mW	SOD-323F	7d	1a	Ttr
WY	-	BZX384C43-V	Zener diode	43V±5%, Izt=2mA, Zzt=45Ω, 200mW	SOD-323	5d	2m	Vs
WY	-	BZX584C43	Zener diode	40..46V, Izt=2mA, Zzt=150Ω, 200mW	SOD-523	7d	1a	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
WY	-	BZX784C43	Zener diode	40.85..45.15V, Zzt=150Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WY	-	KDZ36VVY	Zener diode	35.07..36.87V, Izt=2mA, Zzt=300Ω, 100mW	VSC	7d	1a	Kec
WY	-	MM3Z2V0	Zener diode	1.91..2.09V, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Sec
WY	-	P4SMAJ100C	TVS	Vrwm=100V, 2.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WY	-	P4SMAJ11C	TVS	Vrwm=11V, 20A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WY	-	PZU15B3A/DG	Zener diode	15V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WY	-	SMAJ11C	TVS	Vrwm=11V, Vbr=12.2..13.5V, 19.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WY	-	TV04A110KB-G	TVS	Vrwm=11.0V, Vbr=12.20..14.90V, Ipp=19.90A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
WY	ag	BZT52C2V0	Zener diode	2V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1d	Di
WY	ag	BZT52C2V0S	Zener diode	2V±5%, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1a	Di
WZ	-	BZT52B39S	Zener diode	38.22..39.78V, Izt=2mA, Zzt=130Ω, 200mW	SOD-323FL	7d	1a	Tsc
WZ	-	BZT52B47	Zener diode	47V±2%, Izt=5mA, Zzt=100Ω, 410mW	SOD-123	5d	1b	Pjt
WZ	-	BZT52C47-F	Zener diode	44..50V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
WZ	-	BZT52C47S	Zener diode	47V±5%, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1b	Pjt
WZ	-	BZT52C47-V	Zener diode	47V±5%, Izt=5mA, Zzt=70Ω, 500mW	SOD-123	5d	1k	Vs
WZ	-	BZT52C47WS	Zener diode	44.65..49.35V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
WZ	-	BZT52C47WT	Zener diode	44.65..49.35V, Izt=5mA, Zzt=170Ω, 200mW	SOD-523	6d	1a	Ttr
WZ	-	BZT52C47WU	Zener diode	44.65..49.35V, Izt=5mA, Zzt=170Ω, 200mW	SOD-723	7d	1a	Ttr
WZ	-	BZX284-B6V8	Zener diode	6.3V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
WZ	-	BZX384C47-F	Zener diode	44.0..50.0V, Izt=2.0mA, 200mW	SOD-323F	7d	1a	Ttr
WZ	-	BZX384C47-V	Zener diode	47V±5%, Izt=2mA, Zzt=50Ω, 200mW	SOD-323	5d	2m	Vs
WZ	-	BZX584C47	Zener diode	44..50V, Izt=2mA, Zzt=170Ω, 200mW	SOD-523	7d	1a	Pjt
WZ	-	BZX784C47	Zener diode	44.65..49.35V, Zzt=170Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
WZ	-	CD214A-T100CA	TVS	Vrwm=100V, Irsm=2.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
WZ	-	MM3Z39VB	Zener diode	38.22..39.78V, Zzt=122Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
WZ	-	MM3Z39VBW	Zener diode	38.22..39.78V, Izt=2mA, Zzt=130Ω, 200mW	SOD-323FL	7d	1a	Tac
WZ	-	P4SMAJ100CA	TVS	Vrwm=100V, 2.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
WZ	-	P4SMAJ11CA	TVS	Vrwm=11V, 22A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
WZ	-	PMF11CA	TVS	Vbr=12.2..13.5V, Vrwm=11V, Ipp=11.0A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
WZ	-	PZU16BA/DG	Zener diode	16V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
WZ	-	SMAJ100CA	TVS	Vrwm=100V, Vbr=111..136V, 2.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
WZ	-	SMAJ11CA	TVS	Vrwm=11V, Vbr=12.2..13.5V, 22A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
WZ	-	TCMM3Z39VB	Zener diode	39V±2%, Izt=5mA, Zzt=122Ω, 200mW	SOD-323FL	7d	1a	Tac
WZ	-	TV04A110JB-G	TVS	Vrwm=11.0V, Vbr=12.20..13.50V, Ipp=21.98A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
X	-	BAS70-02V.	Si-diode	SBD, GP, 70V, 200mA, Vf<1V(15mA), <2pF, 5ns	SOD-523	6d	1a	Vis
X	-	BB187	C-diode	TV-VHF-tuning, 32V, 20mA, 29.3..2.57pF(2..25V), ΔC=2%	SOD-523	6d	1a	Phi
X	-	MMSZ5225BPT	Zener diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 225mW	SOD-523	6d	1a	Chm
X	ba	BB813	C-diode	SAT-TV-tuning, 30V, 20mA, 0.9..8.5pF(28..1V)	SOD-123	5d	2	Sie
X	ba	BB833	C-diode	SAT-TV-tuning, 30V, 20mA, 0.75..9.3pF(28..1V)	SOD-323	5d	2	Inf
X	bb	BB835	C-diode	SATV-tuning, 30V, 2.8GHz, 0.6pF..9.1pF	SOD-323	5d	2	Sie
X.	-	MMSZ5225SPT	Zener diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 225mW	SOD-523	6d	1a	Chm
X1	-	BZF10C3V3	Zener diode	3.1..3.5V, Izt=76mA, Zzt=10Ω, 1W	SOD-123F	6d	1a	Did
X1	-	BZT52C51-V	Zener diode	51V±5%, Izt=5mA, Zzt=70Ω, 500mW	SOD-123	5d	1k	Vs
X1	-	BZX384C51-F	Zener diode	48.0..54.0V, Izt=2.0mA, 200mW	SOD-323F	7d	1a	Ttr
X1	-	BZX384C51-V	Zener diode	51V±5%, Izt=2mA, Zzt=60Ω, 200mW	SOD-323	5d	2m	Vs
X1	-	CMDZ5221B	Zener diode	2.4V±5%, 20mA, Zzt=30Ω, 250mW	SOD-323	5d	1a	Cen
X1	-	MFPZ4728A	Zener diode	3.1..3.5V, Izt=76.0mA, 1W	SOD-123F	7d	1a	Ttr
X1	-	MM3Z5237B	Zener diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOD-323FL	7d	1a	Bts
X1	-	MM3Z5237BH	Zener diode	7.79..8.61V, Izt=20mA, Zzt=8Ω, 300mW	SOD-323	5d	1a	Zow
X1	-	MMSZ16T	Zener diode	16V±5%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1u	Mot
X1	-	PZU16B1A	Zener diode	16V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
X1	-	ZD5226BSG	Zener diode	3.3V±5%, 5mA, Zzt=95Ω, 500mW	SOD-323-S	7d	1a	Cys
X1	-	ZGFM103V3-MH	Zener diode	3.3V±10%, Zzt=10Ω(Izt=76mA), 1W	SOD-123H	10d	1a	Frm
X1	-	ZGFM103V3-N	Zener diode	3.1..3.5V, Izt=76mA, Zzt=10Ω, 1W	SOD-123F	6d	1a	Frm
X2	-	BZF10C3V6	Zener diode	3.4..3.8V, Izt=69mA, Zzt=10Ω, 1W	SOD-123F	6d	1a	Did
X2	-	BZT52B56	Zener diode	56V±2%, Izt=2.5mA, Zzt=135Ω, 410mW	SOD-123	5d	1b	Pjt
X2	-	BZT52C56S	Zener diode	56V±5%, Izt=2.5mA, Zzt=135Ω, 200mW	SOD-323	5d	1b	Pjt
X2	-	BZT52C56-V	Zener diode	56V±5%, Izt=2.5mA, Zzt=135Ω, 500mW	SOD-123	5d	1k	Vs
X2	-	BZX384C56-F	Zener diode	52.0..60.0V, Izt=2.0mA, 200mW	SOD-323F	7d	1a	Ttr
X2	-	BZX384C56-V	Zener diode	56V±5%, Izt=2mA, Zzt=70Ω, 200mW	SOD-323	5d	2m	Vs
X2	-	BZX584C56	Zener diode	53..59V, Izt=2mA, Zzt=180Ω, 200mW	SOD-523	7d	1a	Pjt
X2	-	CMDZ5222B	Zener diode	2.5V±5%, 20mA, Zzt=30Ω, 250mW	SOD-323	5d	1a	Cen
X2	-	MFPZ4729A	Zener diode	3.4..3.8V, Izt=69.0mA, 1W	SOD-123F	7d	1a	Ttr
X2	-	MM3Z5259B	Zener diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Bts
X2	-	MM3Z5259BH	Zener diode	37.05..40.95V, Izt=3.2mA, Zzt=80Ω, 300mW	SOD-323	5d	1a	Zow
X2	-	MMSZ18T	Zener diode	18V±5%, Izt=5mA, Zzt=45Ω, 500mW	SOD-123	5d	1u	Mot
X2	-	PZU16B2A	Zener diode	16V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
X2	-	ZD5227BSG	Zener diode	3.6V±5%, 5mA, Zzt=90Ω, 500mW	SOD-323-S	7d	1a	Cys
X2	-	ZGFM103V6-MH	Zener diode	3.6V±10%, Zzt=10Ω(Izt=69mA), 1W	SOD-123H	10d	1a	Frm
X2	-	ZGFM103V6-N	Zener diode	3.4..3.8V, Izt=69mA, Zzt=10Ω, 1W	SOD-123F	6d	1a	Frm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
X3	-	BZF10C3V9	Zener diode	3.7..4.1V, Izt=64mA, Zzt=9Ω, 1W	SOD-123F	6d	1a	Did
X3	-	BZT52B62	Zener diode	62V±2%, Izt=2.5mA, Zzt=150Ω, 410mW	SOD-123	5d	1b	Pjt
X3	-	BZT52C62S	Zener diode	62V±5%, Izt=2.5mA, Zzt=150Ω, 200mW	SOD-323	5d	1b	Pjt
X3	-	BZT52C62-V	Zener diode	62V±5%, Izt=2.5mA, Zzt=150Ω, 500mW	SOD-123	5d	1k	Vs
X3	-	BZX384C62-F	Zener diode	58.0..66.0V, Izt=2.0mA, 200mW	SOD-323F	7d	1a	Ttr
X3	-	BZX384C62-V	Zener diode	62V±5%, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	2m	Vs
X3	-	BZX584C62	Zener diode	59..65V, Izt=2mA, Zzt=180Ω, 200mW	SOD-523	7d	1a	Pjt
X3	-	CMDZ5223B	Zener diode	2.7V±5%, 20mA, Zzt=30Ω, 250mW	SOD-323	5d	1a	Cen
X3	-	MFPZ4730A	Zener diode	3.7..4.1V, Izt=64.0mA, 1W	SOD-123F	7d	1a	Ttr
X3	-	MMSZ20T	Zener diode	20V±5%, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1u	Mot
X3	-	PZU16B3A	Zener diode	16V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
X3	-	ZD5228BSG	Zener diode	3.9V±5%, 5mA, Zzt=90Ω, 500mW	SOD-323-S	7d	1a	Cys
X3	-	ZGFM103V9-MH	Zener diode	3.9V±10%, Zzt=9Ω(Izt=64mA), 1W	SOD-123H	10d	1a	Frm
X3	-	ZGFM103V9-N	Zener diode	3.7..4.1V, Izt=64mA, Zzt=9Ω, 1W	SOD-123F	6d	1a	Frm
X4	-	BZF10C4V3	Zener diode	4.1..4.5V, Izt=58mA, Zzt=9Ω, 1W	SOD-123F	6d	1a	Did
X4	-	BZT52B68	Zener diode	68V±2%, Izt=2.5mA, Zzt=200Ω, 410mW	SOD-123	5d	1b	Pjt
X4	-	BZT52C68S	Zener diode	68V±5%, Izt=2.5mA, Zzt=200Ω, 200mW	SOD-323	5d	1b	Pjt
X4	-	BZT52C68-V	Zener diode	68V±5%, Izt=2.5mA, Zzt=200Ω, 500mW	SOD-123	5d	1k	Vs
X4	-	BZX384C68-F	Zener diode	64.0..72.0V, Izt=2.0mA, 200mW	SOD-323F	7d	1a	Ttr
X4	-	BZX384C68-V	Zener diode	68V±5%, Izt=2mA, Zzt=90Ω, 200mW	SOD-323	5d	2m	Vs
X4	-	BZX584C68	Zener diode	64..71V, Izt=2mA, Zzt=180Ω, 200mW	SOD-523	7d	1a	Pjt
X4	-	CMDZ5224B	Zener diode	2.8V±5%, 20mA, Zzt=30Ω, 250mW	SOD-323	5d	1a	Cen
X4	-	MFPZ4731A	Zener diode	4.1..4.5V, Izt=58.0mA, 1W	SOD-123F	7d	1a	Ttr
X4	-	MM1Z5237B	Zener diode	7.79..8.61V, Izt=20mA, Zzt=8Ω, 500mW	SOD-323FL	7d	1a	Eic
X4	-	MM1Z5237BH	Zener diode	7.79..8.61V, Izt=20mA, Zzt=8Ω, 500mW	SOD-123	5d	1a	Zow
X4	-	MMSZ22T	Zener diode	22V±5%, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1u	Mot
X4	-	MMSZ5237B	Zener diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123	5d	1a	Eic
X4	-	PZU18BA	Zener diode	18V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
X4	-	ZD5229BSG	Zener diode	4.3V±5%, 5mA, Zzt=88Ω, 500mW	SOD-323-S	7d	1a	Cys
X4	-	ZGFM104V3-MH	Zener diode	4.3V±10%, Zzt=9Ω(Izt=58mA), 1W	SOD-123H	10d	1a	Frm
X4	-	ZGFM104V3-N	Zener diode	4.1..4.5V, Izt=58mA, Zzt=9Ω, 1W	SOD-123F	6d	1a	Frm
X5	-	BZF10C4V7	Zener diode	4.5..4.9V, Izt=53mA, Zzt=8Ω, 1W	SOD-123F	6d	1a	Did
X5	-	BZT52B75	Zener diode	75V±2%, Izt=2.5mA, Zzt=250Ω, 410mW	SOD-123	5d	1b	Pjt
X5	-	BZT52C75S	Zener diode	75V±5%, Izt=2.5mA, Zzt=250Ω, 200mW	SOD-323	5d	1b	Pjt
X5	-	BZT52C75-V	Zener diode	75V±5%, Izt=2.5mA, Zzt=250Ω, 500mW	SOD-123	5d	1k	Vs
X5	-	BZX384C75-F	Zener diode	70.0..79.0V, Izt=2.0mA, 200mW	SOD-323F	7d	1a	Ttr
X5	-	BZX384C75-V	Zener diode	75V±5%, Izt=2mA, Zzt=95Ω, 200mW	SOD-323	5d	2m	Vs
X5	-	BZX584B39V	Zener diode	38.22..39.78V, Izt=2mA, Zzt=130Ω, 200mW	SOD-523FL	7d	1a	Tac
X5	-	BZX584C75	Zener diode	71..78V, Izt=2mA, Zzt=180Ω, 200mW	SOD-523	7d	1a	Pjt
X5	-	CMDZ5225B	Zener diode	3.0V±5%, 20mA, Zzt=29Ω, 250mW	SOD-323	5d	1a	Cen
X5	-	MFPZ4732A	Zener diode	4.5..4.9V, Izt=53.0mA, 1W	SOD-123F	7d	1a	Ttr
X5	-	MM1Z5259B	Zener diode	37.05..40.95V, Izt=3.2mA, Zzt=80Ω, 500mW	SOD-323FL	7d	1a	Eic
X5	-	MM1Z5259BH	Zener diode	37.05..40.95V, Izt=3.2mA, Zzt=80Ω, 500mW	SOD-123	5d	1a	Zow
X5	-	MM5Z39VB	Zener diode	38.22..39.78V, Izt=2mA, Zzt=130Ω, 200mW	SOD-523FL	7d	1a	Tac
X5	-	MMSZ24T	Zener diode	24V±5%, Izt=5mA, Zzt=70Ω, 500mW	SOD-123	5d	1u	Mot
X5	-	MMSZ5259B	Zener diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 500mW	SOD-123	5d	1a	Eic
X5	-	MMVL409	C-diode	VHF-tuning, 20V, 200mA, 200mW, 26/32pF(3V, 1MHz)	SOD-323	5d	1a	Ons
X5	-	PZU18B1A	Zener diode	18V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
X5	-	ZD5230BSG	Zener diode	4.7V±5%, 5mA, Zzt=70Ω, 500mW	SOD-323-S	7d	1a	Cys
X5	-	ZGFM104V7-MH	Zener diode	4.7V±10%, Zzt=8Ω(Izt=53mA), 1W	SOD-123H	10d	1a	Frm
X5	-	ZGFM104V7-N	Zener diode	4.5..4.9V, Izt=53mA, Zzt=8Ω, 1W	SOD-123F	6d	1a	Frm
X6	-	BZF10C5V1	Zener diode	4.8..5.4V, Izt=49mA, Zzt=7Ω, 1W	SOD-123F	6d	1a	Did
X6	-	CMDZ5226B	Zener diode	3.3V±5%, 20mA, Zzt=28Ω, 250mW	SOD-323	5d	1a	Cen
X6	-	MFPZ4733A	Zener diode	4.8..5.4V, Izt=49.0mA, 1W	SOD-123F	7d	1a	Ttr
X6	-	PZU18B2A	Zener diode	18V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
X6	-	ZD5231BSG	Zener diode	5.1V±5%, 5mA, Zzt=50Ω, 500mW	SOD-323-S	7d	1a	Cys
X6	-	ZGFM105V1-MH	Zener diode	5.1V±10%, Zzt=7Ω(Izt=49mA), 1W	SOD-123H	10d	1a	Frm
X6	-	ZGFM105V1-N	Zener diode	4.8..5.4V, Izt=49mA, Zzt=7Ω, 1W	SOD-123F	6d	1a	Frm
X7	-	BZF10C5V6	Zener diode	5.3..5.9V, Izt=45mA, Zzt=5Ω, 1W	SOD-123F	6d	1a	Did
X7	-	CMDZ5227B	Zener diode	3.6V±5%, 20mA, Zzt=24Ω, 250mW	SOD-323	5d	1a	Cen
X7	-	MFPZ4734A	Zener diode	5.3..5.9V, Izt=45.0mA, 1W	SOD-123F	7d	1a	Ttr
X7	-	PZU18B3A	Zener diode	18V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
X7	-	ZD5232BSG	Zener diode	5.6V±5%, 5mA, Zzt=25Ω, 500mW	SOD-323-S	7d	1a	Cys
X7	-	ZGFM105V6-MH	Zener diode	5.6V±10%, Zzt=5Ω(Izt=45mA), 1W	SOD-123H	10d	1a	Frm
X7	-	ZGFM105V6-N	Zener diode	5.3..5.9V, Izt=45mA, Zzt=5Ω, 1W	SOD-123F	6d	1a	Frm
X8	-	BZF10C6V2	Zener diode	5.9..6.5V, Izt=41mA, Zzt=2Ω, 1W	SOD-123F	6d	1a	Did
X8	-	BZT52C24WT	Zener diode	22.80..25.20V, Izt=5mA, Zzt=70Ω, 200mW	SOD-523	6d	1a	Ttr
X8	-	CMDZ5228B	Zener diode	3.9V±5%, 20mA, Zzt=23Ω, 250mW	SOD-323	5d	1a	Cen
X8	-	MFPZ4735A	Zener diode	5.9..6.5V, Izt=41.0mA, 1W	SOD-123F	7d	1a	Ttr
X8	-	MM5Z24H	Zener diode	22.8..25.6V, Izt=2mA, Zzt=70Ω, 200mW	SOD-523	6d	1a	Zow



SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
X8	-	MM5Z24V	Zener diode	24V±5%, Izt=5mA, Zzt=70Ω, 200mW	SOD-523	6d	1a	Eic
X8	-	PZU2.4BA	Zener diode	2.4V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
X8	-	ZD5234BSG	Zener diode	6.2V±5%, 5mA, Zzt=10Ω, 500mW	SOD-323-S	7d	1a	Cys
X8	-	ZGFM106V2-MH	Zener diode	6.2V±10%, Zzt=2Ω(Izt=41mA), 1W	SOD-123H	10d	1a	Frm
X8	-	ZGFM106V2-N	Zener diode	5.9..6.5V, Izt=41mA, Zzt=2Ω, 1W	SOD-123F	6d	1a	Frm
X9	-	BAS21HPT	Si-diode	Sw, 250V, 200mA, Vf<<1.25V(200mA), 50ns	SOD-323	5d	1a	Chm
X9	-	BZF10C6V8	Zener diode	6.5..7.1V, Izt=37mA, Zzt=3.5Ω, 1W	SOD-123F	6d	1a	Did
X9	-	CMDZ5229B	Zener diode	4.3V±5%, 20mA, Zzt=22Ω, 250mW	SOD-323	5d	1a	Cen
X9	-	MFPZ4736A	Zener diode	6.5..7.1V, Izt=37.0mA, 1W	SOD-123F	7d	1a	Ttr
X9	-	PZU2.7BA	Zener diode	2.7V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
X9	-	VGFM02-C6V8-M	TVS	Vrwm=5.8V, Vbr=6.45..7.14V, 19.0A, 200W(1ms)	SOD-123F	6d	1a	Frm
X9	-	ZD5235BSG	Zener diode	6.8V±5%, 5mA, Zzt=8Ω, 500mW	SOD-323-S	7d	1a	Cys
X9	-	ZGFM106V8-MH	Zener diode	6.8V±10%, Zzt=3.5Ω(Izt=37mA), 1W	SOD-123H	10d	1a	Frm
X9	-	ZGFM106V8-N	Zener diode	6.5..7.1V, Izt=37mA, Zzt=3.5Ω, 1W	SOD-123F	6d	1a	Frm
XA	-	BZT52B51	Zener diode	51V±2%, Izt=5mA, Zzt=100Ω, 410mW	SOD-123	5d	1b	Pjt
XA	-	BZT52C51-F	Zener diode	48..54V, Izt=5mA, 410mW	SOD-123F	7d	1a	Ttr
XA	-	BZT52C51S	Zener diode	51V±5%, Izt=5mA, Zzt=100Ω, 200mW	SOD-323	5d	1b	Pjt
XA	-	BZT52C51WS	Zener diode	48.45..53.55V, Izt=5.0mA, 200mW	SOD-323F	7d	1a	Ttr
XA	-	BZT52C51WT	Zener diode	48.45..53.55V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	6d	1a	Ttr
XA	-	BZT52C51WU	Zener diode	48.45..53.55V, Izt=5mA, Zzt=100Ω, 200mW	SOD-723	7d	1a	Ttr
XA	-	BZX284-B7V5	Zener diode	7.5V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XA	-	BZX584C51	Zener diode	48..54V, Izt=2mA, Zzt=180Ω, 200mW	SOD-523	7d	1a	Pjt
XA	-	BZX784C51	Zener diode	48.45..53.55V, Zzt=100Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
XA	-	CMDZ5230B	Zener diode	4.7V±5%, 20mA, Zzt=19Ω, 250mW	SOD-323	5d	1a	Cen
XA	-	PZU2.7B1A	Zener diode	2.7V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XA	-	SMZG3795A	Zener diode	18V±5%, 70mA, Zzt=12Ω, 1.5W	DO-215AA	5d	1k	Vs
XA	-	SMZJ3795A	Zener diode	18V±5%, 70mA, Zzt=12Ω, 1.5W	DO-214AA	1d	1k	Vs
XA	-	TV04A190KB-G	TVS	Vrwm=19.0V, Vbr=21.13..25.76V, Ipp=11.76A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XB	-	BZX284-B8V2	Zener diode	8.2V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XB	-	BZX784C10	Zener diode	9.50..10.50V, Zzt=20Ω, Izt=5mA, 200mW	SOD-723	7d	1a	Pjt
XB	-	CMDZ5231B	Zener diode	5.1V±5%, 20mA, Zzt=17Ω, 250mW	SOD-323	5d	1a	Cen
XB	-	KDZ15B	Zener diode	15V±2.5%, 20mA, 1W	PMDU	7d	1s	Rhm
XB	-	PZU2.7B2A	Zener diode	2.7V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XB	-	SMF80A	TVS	Vrwm=80.0V, Vbr=88.80..97.60V, 1.55A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
XB	-	SMZG3795B	Zener diode	18V±10%, 70mA, Zzt=12Ω, 1.5W	DO-215AA	5d	1k	Vs
XB	-	SMZJ3795B	Zener diode	18V±10%, 70mA, Zzt=12Ω, 1.5W	DO-214AA	1d	1k	Vs
XB	-	TV02W800-G	TVS	Vrwm=80V, Vbr=88.8..97.6V, Ipp=1.55A, 200W(1ms)	SOD-123	5d	2o	Cmc
XB	-	TV04A190JB-G	TVS	Vrwm=19.0V, Vbr=20.10..23.30V, Ipp=13.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XC	-	BZX284-B9V1	Zener diode	9.1V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XC	-	CMDZ5232B	Zener diode	5.6V±5%, 20mA, Zzt=11Ω, 250mW	SOD-323	5d	1a	Cen
XC	-	PZU20BA	Zener diode	20V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XC	-	SMZG3796A	Zener diode	20V±5%, 62mA, Zzt=14Ω, 1.5W	DO-215AA	5d	1k	Vs
XC	-	SMZJ3796A	Zener diode	20V±5%, 62mA, Zzt=14Ω, 1.5W	DO-214AA	1d	1k	Vs
XD	-	BZX284-B10	Zener diode	10V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XD	-	CMDZ5233B	Zener diode	6.0V±5%, 20mA, Zzt=7.0Ω, 250mW	SOD-323	5d	1a	Cen
XD	-	P4SMAJ110C	TVS	Vrwm=110V, 2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
XD	-	P4SMAJ12C	TVS	Vrwm=12V, 18.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
XD	-	PZU20B1A	Zener diode	20V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XD	-	SMAJ12C	TVS	Vrwm=12V, Vbr=13.3..14.7V, 18.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XD	-	SMZG3796B	Zener diode	20V±10%, 62mA, Zzt=14Ω, 1.5W	DO-215AA	5d	1k	Vs
XD	-	SMZJ3796B	Zener diode	20V±10%, 62mA, Zzt=14Ω, 1.5W	DO-214AA	1d	1k	Vs
XD	-	TV04A120KB-G	TVS	Vrwm=12V, Vbr=13.30..16.30V, Ipp=18.18A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XE	-	BZX284-B11	Zener diode	11V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XE	-	CD214A-T110CA	TVS	Vrwm=110V, Irsm=2.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
XE	-	CMDZ5234B	Zener diode	6.2V±5%, 20mA, Zzt=7.0Ω, 250mW	SOD-323	5d	1a	Cen
XE	-	P4SMAJ110CA	TVS	Vrwm=110V, 2.3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
XE	-	P4SMAJ12CA	TVS	Vrwm=12V, 20.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
XE	-	PMF12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, Ipp=10.1A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
XE	-	PZU20B2A	Zener diode	20V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XE	-	SMAJ110CA	TVS	Vrwm=110V, Vbr=122..135V, 1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
XE	-	SMAJ12CA	TVS	Vrwm=12V, Vbr=13.3..14.7V, 20.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XE	-	SMF54A	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, 2.30A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
XE	-	SMZG3797A	Zener diode	22V±5%, 56mA, Zzt=17.5Ω, 1.5W	DO-215AA	5d	1k	Vs
XE	-	SMZJ3797A	Zener diode	22V±5%, 56mA, Zzt=17.5Ω, 1.5W	DO-214AA	1d	1k	Vs
XE	-	TV02W540-G	TVS	Vrwm=54V, Vbr=60.0..66.3V, Ipp=2.30A, 200W(1ms)	SOD-123	5d	2o	Cmc
XE	-	TV04A120JB-G	TVS	Vrwm=12V, Vbr=13.30..14.70V, Ipp=20.10A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XF	-	BZX284-B12	Zener diode	12V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XF	-	CMDZ5235B	Zener diode	6.8V±5%, 20mA, Zzt=5.0Ω, 250mW	SOD-323	5d	1a	Cen
XF	-	MAZD300	Zener diode	28..32V, Zzt=160Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
XF	-	P4SMAJ120C	TVS	Vrwm=120V, 1.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
XF	-	P4SMAJ13C	TVS	Vrwm=13V, 16.8A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
XF	-	PZU20B3A	Zener diode	20V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XF	-	SMAJ13C	TVS	Vrwm=13V, Vbr=14.4..17.6V, 16.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XF	-	SMZG3797B	Zener diode	22V±10%, 56mA, Zzt=17.5Ω, 1.5W	DO-215AA	5d	1k	Vs
XF	-	SMZJ3797B	Zener diode	22V±10%, 56mA, Zzt=17.5Ω, 1.5W	DO-214AA	1d	1k	Vs
XF	-	TV04A130KB-G	TVS	Vrwm=13.0V, Vbr=14.40..17.60V, Ipp=16.81A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XG	-	BZX284-B13	Zener diode	13V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XG	-	CD214A-T120CA	TVS	Vrwm=120V, Irsm=2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
XG	-	CMDZ5236B	Zener diode	7.5V±5%, 20mA, Zzt=6.0Ω, 250mW	SOD-323	5d	1a	Cen
XG	-	P4SMAJ120CA	TVS	Vrwm=120V, 2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
XG	-	P4SMAJ13CA	TVS	Vrwm=13V, 18.6A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
XG	-	PMF13CA	TVS	Vbr=14.4..15.9V, Vrwm=13V, Ipp=9.30A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
XG	-	PZU22BA	Zener diode	22V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XG	-	SMAJ120CA	TVS	Vrwm=120V, Vbr=133..147V, 1.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
XG	-	SMAJ13CA	TVS	Vrwm=13V, Vbr=14.4..15.9V, 18.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XG	-	SMF58A	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, 2.14A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
XG	-	SMZG3798A	Zener diode	24V±5%, 51mA, Zzt=19Ω, 1.5W	DO-215AA	5d	1k	Vs
XG	-	SMZJ3798A	Zener diode	24V±5%, 51mA, Zzt=19Ω, 1.5W	DO-214AA	1d	1k	Vs
XG	-	TV02W580-G	TVS	Vrwm=58V, Vbr=64.4..71.2V, Ipp=2.14A, 200W(1ms)	SOD-123	5d	2o	Cmc
XG	-	TV04A130JB-G	TVS	Vrwm=13.0V, Vbr=14.40..15.90V, Ipp=18.60A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XH	-	BAT46W	Si-diode	SBD, 100V, 150mA, Vf<1V(250mA), 6pF	SOD-123	5d	1d	Sme
XH	-	BZX284-B15	Zener diode	15V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XH	-	CMDZ5237B	Zener diode	8.2V±5%, 20mA, Zzt=8.0Ω, 250mW	SOD-323	5d	1a	Cen
XH	-	MMSD701	Si-diode	UHF/VHF Det, Schottky Barrier, 70V, 225mW, <1pF	SOD-123	5d	1a	Ons
XH	-	P4SMAJ130C	TVS	Vrwm=130V, 1.7A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
XH	-	P4SMAJ14C	TVS	Vrwm=14V, 15.5A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Lsr
XH	-	PZU22B1A	Zener diode	22V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XH	-	SM4T150C	TVS	Vrwm=150V, 2A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
XH	-	SMAJ14C	TVS	Vrwm=14V, Vbr=15.6..19.1V, 15.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XH	-	SMZG3798B	Zener diode	24V±10%, 51mA, Zzt=19Ω, 1.5W	DO-215AA	5d	1k	Vs
XH	-	SMZJ3798B	Zener diode	24V±10%, 51mA, Zzt=19Ω, 1.5W	DO-214AA	1d	1k	Vs
XH	-	TV04A140KB-G	TVS	Vrwm=14.0V, Vbr=15.60..19.10V, Ipp=15.50A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XI	-	BZX284-B16	Zener diode	16V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XI	-	SMZG3799A	Zener diode	27V±5%, 46mA, Zzt=23Ω, 1.5W	DO-215AA	5d	1k	Vs
XI	-	SMZJ3799A	Zener diode	27V±5%, 46mA, Zzt=23Ω, 1.5W	DO-214AA	1d	1k	Vs
XJ	-	BZT52B43WS	Zener diode	42.14..43.86V, Izt=2.5mA, 300mW	SOD-323F	7d	1a	Ttr
XJ	-	BZX284-B18	Zener diode	18V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XJ	-	CMDZ5238B	Zener diode	8.7V±5%, 20mA, Zzt=8.0Ω, 250mW	SOD-323	5d	1a	Cen
XJ	-	MM3ZB43H	Zener diode	42.14..43.86V, Izt=2.5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Zow
XJ	-	SMZG3799B	Zener diode	27V±10%, 46mA, Zzt=23Ω, 1.5W	DO-215AA	5d	1k	Vs
XJ	-	SMZJ3799B	Zener diode	27V±10%, 46mA, Zzt=23Ω, 1.5W	DO-214AA	1d	1k	Vs
XK	-	BZT52B47WS	Zener diode	46.06..47.94V, Izt=2.5mA, 300mW	SOD-323F	7d	1a	Ttr
XK	-	BZX284-B20	Zener diode	20V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XK	-	CD214A-T130CA	TVS	Vrwm=130V, Irsm=1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
XK	-	CMDZ5239B	Zener diode	9.1V±5%, 20mA, Zzt=10Ω, 250mW	SOD-323	5d	1a	Cen
XK	-	MM3ZB47H	Zener diode	46.06..47.94V, Izt=2.5mA, Zzt=150Ω, 300mW	SOD-323	5d	1a	Zow
XK	-	P4SMAJ130CA	TVS	Vrwm=130V, 1.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
XK	-	P4SMAJ14CA	TVS	Vrwm=14V, 17.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lsr
XK	-	PMF14CA	TVS	Vbr=15.6..17.2V, Vrwm=14V, Ipp=8.62A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
XK	-	PZU22B2A	Zener diode	22V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XK	-	SM4T150CA	TVS	Vrwm=150V, 2A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
XK	-	SMAJ130CA	TVS	Vrwm=130V, Vbr=144..159V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
XK	-	SMAJ14CA	TVS	Vrwm=14V, Vbr=15.6..17.2V, 17.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XK	-	SMF60A	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, 2.07A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
XK	-	SMZG3800A	Zener diode	30V±5%, 41mA, Zzt=26Ω, 1.5W	DO-215AA	5d	1k	Vs
XK	-	SMZJ3800A	Zener diode	30V±5%, 41mA, Zzt=26Ω, 1.5W	DO-214AA	1d	1k	Vs
XK	-	TV02W600-G	TVS	Vrwm=60V, Vbr=66.7..73.7V, Ipp=2.07A, 200W(1ms)	SOD-123	5d	2o	Cmc
XK	-	TV04A140JB-G	TVS	Vrwm=14.0V, Vbr=15.60..17.20V, Ipp=17.24A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XL	-	BZX284-B22	Zener diode	22V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XL	-	CMDZ5240B	Zener diode	10V±5%, 20mA, Zzt=17Ω, 250mW	SOD-323	5d	1a	Cen
XL	-	P4SMAJ150C	TVS	Vrwm=150V, 1.5A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
XL	-	P4SMAJ15C	TVS	Vrwm=15V, 14.8A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Lsr
XL	-	PZU22B3A	Zener diode	22V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XL	-	SMAJ15C	TVS	Vrwm=15V, Vbr=16.7..18.5V, 14.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XL	-	SMZG3800B	Zener diode	30V±10%, 41mA, Zzt=26Ω, 1.5W	DO-215AA	5d	1k	Vs
XL	-	SMZJ3800B	Zener diode	30V±10%, 41mA, Zzt=26Ω, 1.5W	DO-214AA	1d	1k	Vs
XL	-	TV04A150KB-G	TVS	Vrwm=15.0V, Vbr=16.70..20.40V, Ipp=14.87A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XM	-	BZT52B51WS	Zener diode	49.98..52.02V, Izt=2.5mA, 300mW	SOD-323F	7d	1a	Ttr
XM	-	BZX284-B24	Zener diode	24V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XM	-	CD214A-T150CA	TVS	Vrwm=150V, Irsm=1.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
XM	-	MM3ZB51H	Zener diode	49.98..52.02V, Izt=2.5mA, Zzt=180Ω, 300mW	SOD-323	5d	1a	Zow
XM	-	P4SMAJ150CA	TVS	Vrwm=150V, 1.6A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
XM	-	P4SMAJ15CA	TVS	Vrwm=15V, 16.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lsr
XM	-	PMF15CA	TVS	Vbr=16.7..18.5V, Vrwm=15V, Ipp=8.20A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
XM	-	PZU24BA	Zener diode	24V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XM	-	SMAJ150CA	TVS	Vrwm=150V, Vbr=167..185V, 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
XM	-	SMAJ15CA	TVS	Vrwm=15V, Vbr=16.7..18.5V, 16.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XM	-	SMF64A	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, 1.94A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
XM	-	TV02W640-G	TVS	Vrwm=64V, Vbr=71.1..78.6V, Ipp=1.94A, 200W(1ms)	SOD-123	5d	2o	Cmc
XM	-	TV04A150JB-G	TVS	Vrwm=15.0V, Vbr=16.70.. 18.50V, Ipp=16.39A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XN	-	BZT52B56WS	Zener diode	54.88..57.12V, Izt=2.5mA, 300mW	SOD-323F	7d	1a	Ttr
XN	-	BZX284-B27	Zener diode	27V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XN	-	CMDZ5241B	Zener diode	11V±5%, 20mA, Zzt=22Ω, 250mW	SOD-323	5d	1a	Cen
XN	-	MM3ZB56H	Zener diode	54.88..57.12V, Izt=2.5mA, Zzt=180Ω, 300mW	SOD-323	5d	1a	Zow
XN	-	P4SMAJ160C	TVS	Vrwm=160V, 1.4A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
XN	-	P4SMAJ16C	TVS	Vrwm=16V, 13.8A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Lsr
XN	-	PZU24B1A	Zener diode	24V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XN	-	SMAJ16C	TVS	Vrwm=16V, Vbr=17.8..21.8V, 13.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XN	-	TV04A160KB-G	TVS	Vrwm=16.0V, Vbr=17.80.. 21.80V, Ipp=13.89A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XO	-	BZX284-B30	Zener diode	30V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XO	-	CMDZ5242B	Zener diode	12V±5%, 20mA, Zzt=30Ω, 250mW	SOD-323	5d	1a	Cen
XP	-	BZT52B62WS	Zener diode	60.76..63.24V, Izt=2.5mA, 300mW	SOD-323F	7d	1a	Ttr
XP	-	BZX284-B33	Zener diode	33V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XP	-	CD214A-T160CA	TVS	Vrwm=160V, Irsm=1.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
XP	-	CMDZ13L	Zener diode	12.35..13.65V, Izt=0.5mA, Zzt=80Ω, 250mW	SOD-323	5d	1a	Cen
XP	-	CMDZ5243B	Zener diode	13V±5%, 9.5mA, Zzt=13Ω, 250mW	SOD-323	5d	1a	Cen
XP	-	MM3ZB62H	Zener diode	60.76..63.24V, Izt=2.5mA, Zzt=200Ω, 300mW	SOD-323	5d	1a	Zow
XP	-	P4SMAJ160CA	TVS	Vrwm=160V, 1.5A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
XP	-	P4SMAJ16CA	TVS	Vrwm=16V, 15.3A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Lsr
XP	-	PMF16CA	TVS	Vbr=17.8..19.7V, Vrwm=16V, Ipp=7.69A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
XP	-	PZU24B2A	Zener diode	24V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XP	-	SMAJ160CA	TVS	Vrwm=160V, Vbr=178..197V, 1.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
XP	-	SMAJ16CA	TVS	Vrwm=16V, Vbr=17.8..21.8V, 15.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XP	-	SMF70A	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, 1.77A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
XP	-	TV02W700-G	TVS	Vrwm=70V, Vbr=77.8..86.0V, Ipp=1.77A, 200W(1ms)	SOD-123	5d	2o	Cmc
XP	-	TV04A160JB-G	TVS	Vrwm=16.0V, Vbr=17.80..19.70V, Ipp=15.38A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XQ	-	BZX284-B36	Zener diode	36V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XQ	-	CMDZ5244B	Zener diode	14V±5%, 9.0mA, Zzt=15Ω, 250mW	SOD-323	5d	1a	Cen
XQ	-	P4SMAJ170C	TVS	Vrwm=170V, 1.3A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
XQ	-	P4SMAJ17C	TVS	Vrwm=17V, 13.1A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Lsr
XQ	-	SMAJ17C	TVS	Vrwm=17V, Vbr=18.9..23.1V, 13.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XQ	-	TV04A170KB-G	TVS	Vrwm=17.0V, Vbr=18.90..23.10V, Ipp=13.11A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XR	-	BZT52B68WS	Zener diode	66.64..69.36V, Izt=2.5mA, 300mW	SOD-323F	7d	1a	Ttr
XR	-	BZX284-B39	Zener diode	39V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XR	-	CD214A-T170CA	TVS	Vrwm=170V, Irsm=1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Brn
XR	-	CMDZ5245B	Zener diode	15V±5%, 8.5mA, Zzt=16Ω, 250mW	SOD-323	5d	1a	Cen
XR	-	MM3ZB68H	Zener diode	66.64..69.36V, Izt=2.5mA, Zzt=250Ω, 300mW	SOD-323	5d	1a	Zow
XR	-	P4SMAJ170CA	TVS	Vrwm=170V, 1.4A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
XR	-	P4SMAJ17CA	TVS	Vrwm=17V, 14.5A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Lsr
XR	-	PMF17CA	TVS	Vbr=18.9..20.9V, Vrwm=17V, Ipp=7.25A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
XR	-	PZU24B3A	Zener diode	24V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XR	-	SMAJ170CA	TVS	Vrwm=170V, Vbr=189..209V, 1.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1x	Di
XR	-	SMAJ17CA	TVS	Vrwm=17V, Vbr=18.9..20.9V, 14.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XR	-	SMF75A	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, 1.65A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
XR	-	TV02W750-G	TVS	Vrwm=75V, Vbr=83.3..92.1V, Ipp=1.65A, 200W(1ms)	SOD-123	5d	2o	Cmc
XR	-	TV04A170JB-G	TVS	Vrwm=17.0V, Vbr=18.90..20.90V, Ipp=14.49A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XS	-	BZX284-B43	Zener diode	43V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XS	-	CMDZ5246B	Zener diode	16V±5%, 7.8mA, Zzt=17Ω, 250mW	SOD-323	5d	1a	Cen
XS	-	P4SMAJ18C	TVS	Vrwm=18V, 12.4A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Lsr
XS	-	PZU27BA	Zener diode	27V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XS	-	SM4T200C	TVS	Vrwm=200V, 1.5A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste
XS	-	SMAJ18C	TVS	Vrwm=18V, Vbr=20.0..24.4V, 12.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XS	-	TV04A180KB-G	TVS	Vrwm=18.0V, Vbr=20.0..24.40V, Ipp=12.42A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XT	-	BZX284-B47	Zener diode	47V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XT	-	CMDZ5247B	Zener diode	17V±5%, 7.4mA, Zzt=19Ω, 250mW	SOD-323	5d	1a	Cen
XT	-	MMSD301	Si-diode	UHF/VHF Det, Schottky Barrier, 30V, 225mW, <1.5pF	SOD-123	5d	1a	Ons
XT	-	P4SMAJ18CA	TVS	Vrwm=18V, 13.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1j	Lsr
XT	-	PMF18CA	TVS	Vbr=20.0..22.1V, Vrwm=18V, Ipp=6.85A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
XT	-	PZU3.0BA	Zener diode	3.0V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XT	-	SM4T200CA	TVS	Vrwm=200V, 1.5A, 400W(1ms), Bidir.	SOD-6	1ba	1r	Ste

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
XT	-	SMAJ18CA	TVS	Vrwm=18V, Vbr=20.0..22.1V, 13.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XT	-	SMF78A	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, 1.59A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
XT	-	TV02W780-G	TVS	Vrwm=78V, Vbr=86.7..95.8V, Ipp=1.59A, 200W(1ms)	SOD-123	5d	2o	Cmc
XT	-	TV04A180JB-G	TVS	Vrwm=18.0V, Vbr=20.0..22.10V, Ipp=13.70A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XU	-	BZX284-B51	Zener diode	51V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XU	-	CMDZ5248B	Zener diode	18V±5%, 7.0mA, Zzt=21Ω, 250mW	SOD-323	5d	1a	Cen
XU	-	P4SMAJ20C	TVS	Vrwm=20V, 11.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
XU	-	PMF19CA	TVS	Vbr=21.1..23.3V, Vrwm=19V, Ipp=6.54A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
XU	-	PZU3.0B1A	Zener diode	3.0V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XU	-	SMAJ20C	TVS	Vrwm=20V, Vbr=22.2..27.1V, 11.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XU	-	TV04A200KB-G	TVS	Vrwm=20.0V, Vbr=22.20..27.10V, Ipp=11.17A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XV	-	BZX284-B56	Zener diode	56V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XV	-	CMDZ5249B	Zener diode	19V±5%, 6.6mA, Zzt=23Ω, 250mW	SOD-323	5d	1a	Cen
XV	-	P4SMAJ20CA	TVS	Vrwm=20V, 12.3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
XV	-	PMF20CA	TVS	Vbr=22.2..24.5V, Vrwm=20V, Ipp=6.17A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
XV	-	PZU3.0B2A	Zener diode	3.0V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XV	-	SMAJ20CA	TVS	Vrwm=20V, Vbr=22.2..24.5V, 12.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XV	-	SMF85A	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, 1.46A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
XV	-	TV02W850-G	TVS	Vrwm=85V, Vbr=94.4..104V, Ipp=1.46A, 200W(1ms)	SOD-123	5d	2o	Cmc
XV	-	TV04A200JB-G	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=12.35A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XW	-	BZX284-B62	Zener diode	62V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XW	-	P4SMAJ22C	TVS	Vrwm=22V, 10.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
XW	-	PZU3.3BA	Zener diode	3.3V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XW	-	SMAJ22C	TVS	Vrwm=22V, Vbr=24.4..29.8V, 10.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XW	-	TV04A220KB-G	TVS	Vrwm=22.0V, Vbr=24.40..29.80V, Ipp=10.15A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XX	-	BZT52B75WS	Zener diode	73.50..76.50V, Izt=2.5mA, 300mW	SOD-323F	7d	1a	Ttr
XX	-	BZX284-B68	Zener diode	68V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XX	-	CMDZ5250B	Zener diode	20V±5%, 6.2mA, Zzt=25Ω, 250mW	SOD-323	5d	1a	Cen
XX	-	MM3ZB75H	Zener diode	73.5..76.5V, Izt=2.5mA, Zzt=300Ω, 300mW	SOD-323	5d	1a	Zow
XX	-	P4SMAJ22CA	TVS	Vrwm=22V, 11.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
XX	-	PZU3.3B1A	Zener diode	3.3V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XX	-	SMAJ22CA	TVS	Vrwm=22V, Vbr=24.4..26.9V, 11.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XX	-	SMF90A	TVS	Vrwm=90V, Vbr=100.0..111.0V, 1.37A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
XX	-	TV02W900-G	TVS	Vrwm=90V, Vbr=100..111V, Ipp=1.3A, 200W(1ms)	SOD-123	5d	2o	Cmc
XX	-	TV04A220JB-G	TVS	Vrwm=22.0V, Vbr=24.40..26.90V, Ipp=11.27A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XY	-	BZT52B2V4WT	Zener diode	2.352..2.448V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
XY	-	BZX284-B75	Zener diode	75V±2%, If=250mA, 400mW	SOD-110	12d	1a	Phi
XY	-	CMDZ5251B	Zener diode	22V±5%, 5.6mA, Zzt=29Ω, 250mW	SOD-323	5d	1a	Cen
XY	-	MM5Z2B4H	Zener diode	2.352..2.448V, Zzt=100Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
XY	-	P4SMAJ24C	TVS	Vrwm=24V, 9.3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
XY	-	PMF22CA	TVS	Vbr=24.4..26.9V, Vrwm=22V, Ipp=5.63A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
XY	-	PZU3.3B2A	Zener diode	3.3V±2%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XY	-	RL52Z2V4	Zener diode	2.352..2.448V, Zzt=100Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
XY	-	SMAJ24C	TVS	Vrwm=24V, Vbr=26.7..32.6V, 9.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XY	-	TV04A240KB-G	TVS	Vrwm=24.0V, Vbr=26.70..32.60V, Ipp=9.30A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
XZ	-	BZT52B2V7WT	Zener diode	2.646..2.754V, Izt=5.0mA, 200mW	SOD-523	6d	1a	Ttr
XZ	-	BZT52B43S	Zener diode	42.14..43.86V, Izt=2mA, Zzt=150Ω, 200mW	SOD-323FL	7d	1a	Tsc
XZ	-	CMDZ5252B	Zener diode	24V±5%, 5.2mA, Zzt=33Ω, 250mW	SOD-323	5d	1a	Cen
XZ	-	MM3Z43VB	Zener diode	42.14..43.86V, Zzt=141Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
XZ	-	MM3Z43VBW	Zener diode	42.14..43.86V, Izt=2mA, Zzt=150Ω, 200mW	SOD-323FL	7d	1a	Tac
XZ	-	MM5Z2B7H	Zener diode	2.646..2.754V, Zzt=110Ω, Izt=5mA, 200mW	SOD-523	6d	1a	Zow
XZ	-	P4SMAJ24CA	TVS	Vrwm=24V, 10.3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
XZ	-	PMF24CA	TVS	Vbr=26.7..29.5V, Vrwm=24V, Ipp=5.14A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
XZ	-	PZU3.6BA	Zener diode	3.6V±5%, If=200mA, 320mW	SOD-323	5d	1a	Phi
XZ	-	RL52Z2V7	Zener diode	2.646..2.754V, Zzt=110Ω, Izt=5mA, 200mW	SOD-523	6d	1b	Rul
XZ	-	SMAJ24CA	TVS	Vrwm=24V, Vbr=26.7..29.5V, 10.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
XZ	-	SMF100A	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, 1.23A, 200W(10/1000µs)	SOD-123FL	7d	1a	Ers
XZ	-	TCMM3Z43VB	Zener diode	43V±2%, Izt=5mA, Zzt=141Ω, 200mW	SOD-323FL	7d	1a	Tac
XZ	-	TV02W101-G	TVS	Vrwm=100V, Vbr=111..123V, Ipp=1.23A, 200W(1ms)	SOD-123	5d	2o	Cmc
XZ	-	TV04A240JB-G	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=10.28A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
Y	-	BB182B	C-diode	TV-VHF-tuning, 34V, 20mA, 47..2.65pF(2..25V), 160MHz	SOD-523	6d	1a	Phi
Y	-	EP10QY03	Si-diode	SBR, 30V, 1A, Vf<0.47V(1A)	SOD-123	5d	1a	Nih
Y	-	MA2S707	C-diode	SBD, UHF-mix, 5V, 100mA, Vf=0.25V(2mA), 0.85pF	SOD-523	6d	1a	Pan
Y	-	MM9D22V	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 200mW	SOD-923	7d	1n	Wtr
Y	-	MM9D4V3	Zener diode	4.09..4.52V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1b	Wtr
Y	-	MMSZ5226BPT	Zener diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 225mW	SOD-523	6d	1a	Chm
y	-	MMSZ5242BPT	Zener diode	12V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOD-523	6d	1a	Chm
Y	-	NZ9F12VST	Zener diode	11.74..12.24V, Izt=5mA, Zzt=30Ω, 200mW	SOD-923	7d	2m	Ons
Y	-	NZ9F22VT	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 200mW	SOD-923	7d	1n	Ons
Y	-	NZ9F4V3T	Zener diode	4.0..4.52V, Izt=5mA, Zzt=100Ω, 200mW	SOD-923	7d	1b	Ons

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
Y1	-	BZF10C7V5	Zener diode	7.1..7.9V, Izt=34mA, Zzt=4.0Ω, 1W	SOD-123F	6d	1a	Did
Y1	-	BZT52C11T	Zener diode	11V±5%, Izt=5mA, Zzt=20Ω, 100mW	SOD-523	6d	1a	Mco
Y1	-	BZT52C2V4-V-G	Zener diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1k	Vs
Y1	-	BZX384C2V4-V-G	Zener diode	2.4V±5%, Izt=5mA, Zzt=70Ω, 200mW	SOD-323	5d	2m	Vs
Y1	-	CMDZ5253B	Zener diode	25V±5%, 5.0mA, Zzt=35Ω, 250mW	SOD-323	5d	1a	Cen
Y1	-	FS2JI	Si-diode	Rectifier, 600V, 3A, Vf<1.05V(3A), 4µs	DO-214AA	1d	2j	Fag
Y1	-	MFPZ4737A	Zener diode	7.1..7.9V, Izt=34.0mA, 1W	SOD-123F	7d	1a	Ttr
Y1	-	MM3Z5239B	Zener diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 200mW	SOD-323FL	7d	1a	Bts
Y1	-	MM3Z5239BH	Zener diode	8.65..9.56V, Izt=20mA, Zzt=10Ω, 300mW	SOD-323	5d	1a	Zow
Y1	-	MM5Z11V	Zener diode	11V±5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-523	6d	1a	Sec
Y1	-	MMSZ27T	Zener diode	27V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1u	Mot
Y1	-	PZU16B1A/DG	Zener diode	16V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
Y1	-	VGFM02-C7V5-M	TVS	Vrwm=6.4V, Vbr=7.13..7.88V, 17.7A, 200W(1ms)	SOD-123F	6d	1a	Frm
Y1	-	ZD5236BSG	Zener diode	7.5V±5%, 5mA, Zzt=7Ω, 500mW	SOD-323-S	7d	1a	Cys
Y1	-	ZGFM107V5-MH	Zener diode	7.5V±10%, Zzt=4Ω(Izt=34mA), 1W	SOD-123H	10d	1a	Frm
Y1	-	ZGFM107V5-N	Zener diode	7.1..7.9V, Izt=34mA, Zzt=4.0Ω, 1W	SOD-123F	6d	1a	Frm
Y10	-	BZT52C27T	Zener diode	27V±5%, Izt=5mA, Zzt=80Ω, 100mW	SOD-523	6d	1a	Mco
Y10	-	MM5Z27V	Zener diode	25.1..28.9V, 2mA, Zzt=80Ω, 100mW	SOD-523	6d	1a	Sec
Y11	-	BZT52C30T	Zener diode	30V±5%, Izt=5mA, Zzt=80Ω, 100mW	SOD-523	6d	1a	Mco
Y11	-	MM5Z30V	Zener diode	30V±5%, Izt=2mA, Zzt=80Ω, 100mW	SOD-523	6d	1a	Sec
Y12	-	BZT52C33T	Zener diode	33V±5%, Izt=5mA, Zzt=80Ω, 100mW	SOD-523	6d	1a	Mco
Y12	-	MM5Z33V	Zener diode	33V±5%, Izt=2mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Sec
Y13	-	BZT52C36T	Zener diode	36V±5%, Izt=5mA, Zzt=90Ω, 100mW	SOD-523	6d	1a	Mco
Y13	-	MM5Z36V	Zener diode	36V±5%, Izt=2mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Sec
Y14	-	BZT52C39T	Zener diode	39V±5%, Izt=5mA, Zzt=130Ω, 100mW	SOD-523	6d	1a	Mco
Y14	-	MM5Z39V	Zener diode	39V±5%, Izt=2mA, Zzt=130Ω, 200mW	SOD-523	6d	1a	Sec
Y15	-	MM5Z43V	Zener diode	43V±5%, Izt=2mA, Zzt=150Ω, 200mW	SOD-523	6d	1a	Sec
Y16	-	MM5Z47V	Zener diode	47V±5%, Izt=2mA, Zzt=170Ω, 200mW	SOD-523	6d	1a	Sec
Y17	-	MM5Z51V	Zener diode	51V±5%, Izt=2mA, Zzt=180Ω, 200mW	SOD-523	6d	1a	Sec
Y2	-	BZF10C8V2	Zener diode	7.8..8.6V, Izt=31mA, Zzt=4.5Ω, 1W	SOD-123F	6d	1a	Did
Y2	-	BZT52C12T	Zener diode	12V±5%, Izt=5mA, Zzt=25Ω, 100mW	SOD-523	6d	1a	Mco
Y2	-	BZT52C2V7-V-G	Zener diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 500mW	SOD-123	5d	1k	Vs
Y2	-	BZX384C2V7-V-G	Zener diode	2.7V±5%, Izt=5mA, Zzt=75Ω, 200mW	SOD-323	5d	2m	Vs
Y2	-	CMDZ5254B	Zener diode	27V±5%, 4.6mA, Zzt=41Ω, 250mW	SOD-323	5d	1a	Cen
Y2	-	FS2KI	Si-diode	Rectifier, 800V, 3A, Vf<1.05V(3A), 4µs	DO-214AA	1d	2j	Fag
Y2	-	MFPZ4738A	Zener diode	7.8..8.6V, Izt=31.0mA, 1W	SOD-123F	7d	1a	Ttr
Y2	-	MM3Z5260B	Zener diode	43V±5%, Izt=3.0mA, Zzt=93Ω, 200mW	SOD-323FL	7d	1a	Bts
Y2	-	MM3Z5260BH	Zener diode	40.85..45.15V, Izt=3mA, Zzt=93Ω, 300mW	SOD-323	5d	1a	Zow
Y2	-	MM5Z12V	Zener diode	12V±5%, Izt=5mA, Zzt=25Ω, 200mW	SOD-523	6d	1a	Sec
Y2	-	MMSZ30T	Zener diode	30V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1u	Mot
Y2	-	PZU16B2A/DG	Zener diode	16V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
Y2	-	VGFM02-C8V2-M	TVS	Vrwm=7.02V, Vbr=7.79..8.61V, 16.6A, 200W(1ms)	SOD-123F	6d	1a	Frm
Y2	-	ZD5237BSG	Zener diode	8.2V±5%, 5mA, Zzt=7Ω, 500mW	SOD-323-S	7d	1a	Cys
Y2	-	ZGFM108V2-MH	Zener diode	8.2V±10%, Zzt=4.5Ω(Izt=31mA), 1W	SOD-123H	10d	1a	Frm
Y2	-	ZGFM108V2-N	Zener diode	7.8..8.6V, Izt=31mA, Zzt=4.5Ω, 1W	SOD-123F	6d	1a	Frm
Y3	-	BZF10C9V1	Zener diode	8.6..9.6V, Izt=28mA, Zzt=5Ω, 1W	SOD-123F	6d	1a	Did
Y3	-	BZT52C13T	Zener diode	13V±5%, Izt=5mA, Zzt=30Ω, 100mW	SOD-523	6d	1a	Mco
Y3	-	BZT52C3V0-V-G	Zener diode	3.0V±5%, Izt=5mA, Zzt=95Ω, 500mW	SOD-123	5d	1k	Vs
Y3	-	BZX384C3V0-V-G	Zener diode	3.0V±5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	2m	Vs
Y3	-	CMDZ5255B	Zener diode	28V±5%, 4.5mA, Zzt=44Ω, 250mW	SOD-323	5d	1a	Cen
Y3	-	FS2MI	Si-diode	Rectifier, 1000V, 3A, Vf<1.05V(3A), 4µs	DO-214AA	1d	2j	Fag
Y3	-	MFPZ4739A	Zener diode	8.6..9.6V, Izt=28.0mA, 1W	SOD-123F	7d	1a	Ttr
Y3	-	MM5Z13V	Zener diode	13V±5%, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	6d	1a	Sec
Y3	-	MMSZ33T	Zener diode	33V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1u	Mot
Y3	-	PZU16B3A/DG	Zener diode	16V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
Y3	-	VGFM02-C9V1-M	TVS	Vrwm=7.78V, Vbr=8.65..9.55V, 15.0A, 200W(1ms)	SOD-123F	6d	1a	Frm
Y3	-	ZD5239BSG	Zener diode	9.1V±5%, 5mA, Zzt=10Ω, 500mW	SOD-323-S	7d	1a	Cys
Y3	-	ZGFM109V1-MH	Zener diode	9.1V±10%, Zzt=5Ω(Izt=28mA), 1W	SOD-123H	10d	1a	Frm
Y3	-	ZGFM109V1-N	Zener diode	8.6..9.6V, Izt=28mA, Zzt=5Ω, 1W	SOD-123F	6d	1a	Frm
Y4	-	BZF10C10	Zener diode	9.5..10.5V, Izt=25mA, Zzt=7Ω, 1W	SOD-123F	6d	1a	Did
Y4	-	BZT52C15T	Zener diode	15V±5%, Izt=5mA, Zzt=30Ω, 100mW	SOD-523	6d	1a	Mco
Y4	-	BZT52C3V3-V-G	Zener diode	3.3V±5%, Izt=5mA, Zzt=95Ω, 500mW	SOD-123	5d	1k	Vs
Y4	-	BZX384C3V3-V-G	Zener diode	3.3V±5%, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	2m	Vs
Y4	-	CMDZ5256B	Zener diode	30V±5%, 4.2mA, Zzt=49Ω, 250mW	SOD-323	5d	1a	Cen
Y4	-	MFPZ4740A	Zener diode	9.5..10.5V, Izt=25.0mA, 1W	SOD-123F	7d	1a	Ttr
Y4	-	MM1Z5239B	Zener diode	8.65..9.56V, Izt=20mA, Zzt=10Ω, 500mW	SOD-323FL	7d	1a	Eic
Y4	-	MM1Z5239BH	Zener diode	8.65..9.56V, Izt=20mA, Zzt=10Ω, 500mW	SOD-123	5d	1a	Zow
Y4	-	MM5Z15V	Zener diode	15V±5%, Izt=5mA, Zzt=30Ω, 200mW	SOD-523	6d	1a	Sec
Y4	-	MMSZ36T	Zener diode	36V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1u	Mot
Y4	-	MMSZ5239B	Zener diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 500mW	SOD-123	5d	1a	Eic

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
Y4	-	PZU18BA/DG	Zener diode	18V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
Y4	-	VGFM02-C10-M	TVS	Vrwm=8.55V, Vbr=9.50..10.5V, 13.8A, 200W(1ms)	SOD-123F	6d	1a	Frm
Y4	-	ZD5240BSG	Zener diode	10V±5%, 5mA, Zzt=15Ω, 500mW	SOD-323-S	7d	1a	Cys
Y4	-	ZGFM1010-MH	Zener diode	10V±10%, Zzt=7Ω(Izt=25mA), 1W	SOD-123H	10d	1a	Frm
Y4	-	ZGFM1010-N	Zener diode	9.5..10.5V, Izt=25mA, Zzt=7Ω, 1W	SOD-123F	6d	1a	Frm
Y5	-	BZF10C11	Zener diode	10.5..11.6V, Izt=23mA, Zzt=8Ω, 1W	SOD-123F	6d	1a	Did
Y5	-	BZT52C16T	Zener diode	16V±5%, Izt=5mA, Zzt=40Ω, 100mW	SOD-523	6d	1a	Mco
Y5	-	BZT52C3V6-V-G	Zener diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1k	Vs
Y5	-	BZX384C3V6-V-G	Zener diode	3.6V±5%, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	2m	Vs
Y5	-	BZX584B43V	Zener diode	42.14..43.86V, Izt=2mA, Zzt=150Ω, 200mW	SOD-523FL	7d	1a	Tac
Y5	-	CMDZ5257B	Zener diode	33V±5%, 3.8mA, Zzt=58Ω, 250mW	SOD-323	5d	1a	Cen
Y5	-	MFPZ4741A	Zener diode	10.5..11.6V, Izt=23.0mA, 1W	SOD-123F	7d	1a	Ttr
Y5	-	MM1Z5260B	Zener diode	40.85..45.15V, Izt=3.0mA, Zzt=93Ω, 500mW	SOD-323FL	7d	1a	Eic
Y5	-	MM1Z5260BH	Zener diode	40.85..45.15V, Izt=3mA, Zzt=93Ω, 500mW	SOD-123	5d	1a	Zow
Y5	-	MM5Z16V	Zener diode	16V±5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-523	6d	1a	Sec
Y5	-	MM5Z43VB	Zener diode	42.14..43.86V, Izt=2mA, Zzt=150Ω, 200mW	SOD-523FL	7d	1a	Tac
Y5	-	MMSZ39T	Zener diode	39V±5%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1u	Mot
Y5	-	MMSZ5260B	Zener diode	43V±5%, Izt= 3mA, Zzt=93Ω, 500mW	SOD-123	5d	1a	Eic
Y5	-	PZU18B1A/DG	Zener diode	18V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
Y5	-	VGFM02-C11-M	TVS	Vrwm=9.40V, Vbr=10.5..11.6V, 12.8A, 200W(1ms)	SOD-123F	6d	1a	Frm
Y5	-	ZD5241BSG	Zener diode	11V±5%, 5mA, Zzt=18Ω, 500mW	SOD-323-S	7d	1a	Cys
Y5	-	ZGFM1011-MH	Zener diode	11V±10%, Zzt=8Ω(Izt=23mA), 1W	SOD-123H	10d	1a	Frm
Y5	-	ZGFM1011-N	Zener diode	10.5..11.6V, Izt=23mA, Zzt=8Ω, 1W	SOD-123F	6d	1a	Frm
Y6	-	BZF10C12	Zener diode	11.4..12.6V, Izt=21mA, Zzt=9Ω, 1W	SOD-123F	6d	1a	Did
Y6	-	BZT52C18T	Zener diode	18V±5%, Izt=5mA, Zzt=45Ω, 100mW	SOD-523	6d	1a	Mco
Y6	-	BZT52C3V9-V-G	Zener diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1k	Vs
Y6	-	BZX384C3V9-V-G	Zener diode	3.9V±5%, Izt=5mA, Zzt=85Ω, 200mW	SOD-323	5d	2m	Vs
Y6	-	CMDZ5258B	Zener diode	36V±5%, 3.4mA, Zzt=70Ω, 250mW	SOD-323	5d	1a	Cen
Y6	-	MFPZ4742A	Zener diode	11.4..12.6V, Izt=21.0mA, 1W	SOD-123F	7d	1a	Ttr
Y6	-	MM5Z18V	Zener diode	18V±5%, Izt=5mA, Zzt=45Ω, 200mW	SOD-523	6d	1a	Sec
Y6	-	PZU18B2A/DG	Zener diode	18V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
Y6	-	VGFM02-C12-M	TVS	Vrwm=10.2V, Vbr=11.4..12.6V, 12.0A, 200W(1ms)	SOD-123F	6d	1a	Frm
Y6	-	ZD5242BSG	Zener diode	12V±5%, 5mA, Zzt=22Ω, 500mW	SOD-323-S	7d	1a	Cys
Y6	-	ZGFM1012-MH	Zener diode	12V±10%, Zzt=9Ω(Izt=21mA), 1W	SOD-123H	10d	1a	Frm
Y6	-	ZGFM1012-N	Zener diode	11.4..12.6V, Izt=21mA, Zzt=9Ω, 1W	SOD-123F	6d	1a	Frm
Y7	-	BZF10C13	Zener diode	12.4..13.7V, Izt=19mA, Zzt=10Ω, 1W	SOD-123F	6d	1a	Did
Y7	-	BZT52C20T	Zener diode	20V±5%, Izt=5mA, Zzt=55Ω, 100mW	SOD-523	6d	1a	Mco
Y7	-	BZT52C4V3-V-G	Zener diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1k	Vs
Y7	-	BZX384C4V3-V-G	Zener diode	4.3V±5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-323	5d	2m	Vs
Y7	-	CMDZ5259B	Zener diode	39V±5%, 3.2mA, Zzt=80Ω, 250mW	SOD-323	5d	1a	Cen
Y7	-	MFPZ4743A	Zener diode	12.4..13.7V, Izt=19.0mA, 1W	SOD-123F	7d	1a	Ttr
Y7	-	MM5Z20V	Zener diode	20V±5%, Izt=5mA, Zzt=55Ω, 200mW	SOD-523	6d	1a	Sec
Y7	-	PZU18B3A/DG	Zener diode	18V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
Y7	-	VGFM02-C13-M	TVS	Vrwm=11.1V, Vbr=12.4..13.7V, 11.0A, 200W(1ms)	SOD-123F	6d	1a	Frm
Y7	-	ZD5243BSG	Zener diode	13V±5%, 5mA, Zzt=25Ω, 500mW	SOD-323-S	7d	1a	Cys
Y7	-	ZGFM1013-MH	Zener diode	13V±10%, Zzt=10Ω(Izt=19mA), 1W	SOD-123H	10d	1a	Frm
Y7	-	ZGFM1013-N	Zener diode	12.4..13.7V, Izt=19mA, Zzt=10Ω, 1W	SOD-123F	6d	1a	Frm
Y8	-	BZF10C15	Zener diode	14.3..15.8V, Izt=17mA, Zzt=14Ω, 1W	SOD-123F	6d	1a	Did
Y8	-	BZT52C22T	Zener diode	22V±5%, Izt=5mA, Zzt=55Ω, 100mW	SOD-523	6d	1a	Mco
Y8	-	BZT52C27WT	Zener diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Ttr
Y8	-	BZT52C4V7-V-G	Zener diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1k	Vs
Y8	-	BZX384C4V7-V-G	Zener diode	4.7V±5%, Izt=5mA, Zzt=50Ω, 200mW	SOD-323	5d	2m	Vs
Y8	-	CMDZ5260B	Zener diode	43V±5%, 3.0mA, Zzt=93Ω, 250mW	SOD-323	5d	1a	Cen
Y8	-	MFPZ4744A	Zener diode	14.3..15.8V, Izt=17.0mA, 1W	SOD-123F	7d	1a	Ttr
Y8	-	MM5Z22V	Zener diode	22V±5%, Izt=5mA, Zzt=55Ω, 200mW	SOD-523	6d	1a	Sec
Y8	-	MM5Z27H	Zener diode	25.1..28.9V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Zow
Y8	-	MM5Z27V	Zener diode	27V±5%, Izt=2mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Eic
Y8	-	PZU2.4BA/DG	Zener diode	2.4V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
Y8	-	VGFM02-C15-M	TVS	Vrwm=12.8V, Vbr=14.3..15.8V, 9.45A, 200W(1ms)	SOD-123F	6d	1a	Frm
Y8	-	ZD5245BSG	Zener diode	15V±5%, 5mA, Zzt=32Ω, 500mW	SOD-323-S	7d	1a	Cys
Y8	-	ZGFM1015-MH	Zener diode	15V±10%, Zzt=14Ω(Izt=17mA), 1W	SOD-123H	10d	1a	Frm
Y8	-	ZGFM1015-N	Zener diode	14.3..15.8V, Izt=17mA, Zzt=14Ω, 1W	SOD-123F	6d	1a	Frm
Y9	-	BZF10C16	Zener diode	15.2..16.8V, Izt=15.5mA, Zzt=16Ω, 1W	SOD-123F	6d	1a	Did
Y9	-	BZT52C24T	Zener diode	24V±5%, Izt=5mA, Zzt=70Ω, 100mW	SOD-523	6d	1a	Mco
Y9	-	BZT52C5V1-V-G	Zener diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 500mW	SOD-123	5d	1k	Vs
Y9	-	BZX384C5V1-V-G	Zener diode	5.1V±5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-323	5d	2m	Vs
Y9	-	CMDZ5261B	Zener diode	47V±5%, 2.7mA, Zzt=105Ω, 250mW	SOD-323	5d	1a	Cen
Y9	-	MFPZ4745A	Zener diode	15.2..16.8V, Izt=15.5mA, 1W	SOD-123F	7d	1a	Ttr
Y9	-	MM5Z24V	Zener diode	24V±5%, Izt=5mA, Zzt=70Ω, 200mW	SOD-523	6d	1a	Sec
Y9	-	MMBD4448HPT	Si-diode	Sw, 80V, 250mA, Vf<1V(100mA), 4ns	SOD-323	5d	1a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
Y9	-	PZU2.7BA/DG	Zener diode	2.7V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
Y9	-	VGFM02-C16-M	TVS	Vrwm=13.6V, Vbr=15.2..16.8V, 8.90A, 200W(1ms)	SOD-123F	6d	1a	Frm
Y9	-	ZD5246BSG	Zener diode	16V±5%, 5mA, Zzt=36Ω, 500mW	SOD-323-S	7d	1a	Cys
Y9	-	ZGFM1016-MH	Zener diode	16V±10%, Zzt=16Ω(Izt=15.5mA), 1W	SOD-123H	10d	1a	Frm
Y9	-	ZGFM1016-N	Zener diode	15.2..16.8V, Izt=15.5mA, Zzt=16Ω, 1W	SOD-123F	6d	1a	Frm
YA	-	BZT52C5V6-V-G	Zener diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1k	Vs
YA	-	BZX384C5V6-V-G	Zener diode	5.6V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	2m	Vs
YA	-	MM5ZB51H	Zener diode	49.98..52.02V, Zzt=180Ω, Izt=2mA, 200mW	SOD-523	6d	1a	Zow
YA	-	PZU2.7B1A/DG	Zener diode	2.7V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YA	-	RL52Z51	Zener diode	49.98..52.02V, Zzt=180Ω, Izt=2mA, 200mW	SOD-523	6d	1b	Rul
YA	-	SMZG3801A	Zener diode	33V±5%, 38mA, Zzt=33Ω, 1.5W	DO-215AA	5d	1k	Vs
YA	-	SMZJ3801A	Zener diode	33V±5%, 38mA, Zzt=33Ω, 1.5W	DO-214AA	1d	1k	Vs
YB	-	BZT52C6V2-V-G	Zener diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 500mW	SOD-123	5d	1k	Vs
YB	-	BZX384C6V2-V-G	Zener diode	6.2V±5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	2m	Vs
YB	-	KDZ16B	Zener diode	16V±2.5%, 20mA, 1W	PMDU	7d	1s	Rhm
YB	-	MM5ZB56H	Zener diode	54.88..57.12V, Zzt=180Ω, Izt=2mA, 200mW	SOD-523	6d	1a	Zow
YB	-	PZU2.7B2A/DG	Zener diode	2.7V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YB	-	RL52Z56	Zener diode	54.88..57.12V, Zzt=180Ω, Izt=2mA, 200mW	SOD-523	6d	1b	Rul
YB	-	SMZG3801B	Zener diode	33V±10%, 38mA, Zzt=33Ω, 1.5W	DO-215AA	5d	1k	Vs
YB	-	SMZJ3801B	Zener diode	33V±10%, 38mA, Zzt=33Ω, 1.5W	DO-214AA	1d	1k	Vs
YC	-	BZT52C6V8-V-G	Zener diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1k	Vs
YC	-	BZX384C6V8-V-G	Zener diode	6.8V±5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	2m	Vs
YC	-	MM5ZB62H	Zener diode	60.76..63.24V, Zzt=200Ω, Izt=2mA, 200mW	SOD-523	6d	1a	Zow
YC	-	PZU20BA/DG	Zener diode	20V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YC	-	RL52Z62	Zener diode	60.76..63.24V, Zzt=200Ω, Izt=2mA, 200mW	SOD-523	6d	1b	Rul
YC	-	SMZG3802A	Zener diode	36V±5%, 35mA, Zzt=38Ω, 1.5W	DO-215AA	5d	1k	Vs
YC	-	SMZJ3802A	Zener diode	36V±5%, 35mA, Zzt=38Ω, 1.5W	DO-214AA	1d	1k	Vs
YD	-	BZT52C7V5-V-G	Zener diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1k	Vs
YD	-	BZX384C7V5-V-G	Zener diode	7.5V±5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	2m	Vs
YD	-	MM5ZB68H	Zener diode	66.64..69.36V, Zzt=250Ω, Izt=2mA, 200mW	SOD-523	6d	1a	Zow
YD	-	P4SMAJ26C	TVS	Vrwm=26V, 8.6A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YD	-	PZU20B1A/DG	Zener diode	20V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YD	-	RL52Z68	Zener diode	66.64..69.36V, Zzt=250Ω, Izt=2mA, 200mW	SOD-523	6d	1b	Rul
YD	-	SMAJ26C	TVS	Vrwm=26V, Vbr=28.9..35.3V, 8.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YD	-	SMZG3802B	Zener diode	36V±10%, 35mA, Zzt=38Ω, 1.5W	DO-215AA	5d	1k	Vs
YD	-	SMZJ3802B	Zener diode	36V±10%, 35mA, Zzt=38Ω, 1.5W	DO-214AA	1d	1k	Vs
YD	-	TV04A260KB-G	TVS	Vrwm=26.0V, Vbr=28.90..35.30V, Ipp=8.58A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YE	-	BZT52C8V2-V-G	Zener diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1k	Vs
YE	-	BZX384C8V2-V-G	Zener diode	8.2V±5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	2m	Vs
YE	-	MM5ZB75H	Zener diode	73.5..76.5V, Zzt=300Ω, Izt=2mA, 200mW	SOD-523	6d	1a	Zow
YE	-	P4SMAJ26CA	TVS	Vrwm=26V, 9.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YE	-	PMF26CA	TVS	Vbr=28.9..31.9V, Vrwm=26V, Ipp=4.75A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
YE	-	PZU20B2A/DG	Zener diode	20V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YE	-	RL52Z75	Zener diode	73.5..76.5V, Zzt=300Ω, Izt=2mA, 200mW	SOD-523	6d	1b	Rul
YE	-	SMAJ26CA	TVS	Vrwm=26V, Vbr=28.9..31.9V, 9.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YE	-	SMZG3803A	Zener diode	39V±5%, 31mA, Zzt=45Ω, 1.5W	DO-215AA	5d	1k	Vs
YE	-	SMZJ3803A	Zener diode	39V±5%, 31mA, Zzt=45Ω, 1.5W	DO-214AA	1d	1k	Vs
YE	-	TV04A260JB-G	TVS	Vrwm=26.0V, Vbr=28.90..31.90V, Ipp=9.50A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YF	-	BZT52C9V1-V-G	Zener diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 500mW	SOD-123	5d	1k	Vs
YF	-	BZX384C9V1-V-G	Zener diode	9.1V±5%, Izt=5mA, Zzt=6Ω, 200mW	SOD-323	5d	2m	Vs
YF	-	MAZD330	Zener diode	31..35V, Zzt=200Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
YF	-	P4SMAJ28C	TVS	Vrwm=28V, 8A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YF	-	PZU20B3A/DG	Zener diode	20V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YF	-	SMAJ28C	TVS	Vrwm=28V, Vbr=31.1..38.0V, 8A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YF	-	SMZG3803B	Zener diode	39V±10%, 31mA, Zzt=45Ω, 1.5W	DO-215AA	5d	1k	Vs
YF	-	SMZJ3803B	Zener diode	39V±10%, 31mA, Zzt=45Ω, 1.5W	DO-214AA	1d	1k	Vs
YF	-	TV04A280KB-G	TVS	Vrwm=28.0V, Vbr=31.10..38.0V, Ipp=8.0A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YG	-	BZT52C10-V-G	Zener diode	10V±5%, Izt=5mA, Zzt=20Ω, 500mW	SOD-123	5d	1k	Vs
YG	-	BZX384C10-V-G	Zener diode	10V±5%, Izt=5mA, Zzt=8Ω, 200mW	SOD-323	5d	2m	Vs
YG	-	P4SMAJ28CA	TVS	Vrwm=28V, 8.8A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YG	-	PMF28CA	TVS	Vbr=31.1..34.4V, Vrwm=28V, Ipp=4.41A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
YG	-	PZU22BA/DG	Zener diode	22V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YG	-	SMAJ28CA	TVS	Vrwm=28V, Vbr=31.1..34.4V, 8.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YG	-	SMZG3804A	Zener diode	43V±5%, 28mA, Zzt=53Ω, 1.5W	DO-215AA	5d	1k	Vs
YG	-	SMZJ3804A	Zener diode	43V±5%, 28mA, Zzt=53Ω, 1.5W	DO-214AA	1d	1k	Vs
YG	-	TV04A280JB-G	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=8.81A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YH	-	BZT52C11-V-G	Zener diode	11V±5%, Izt=5mA, Zzt=20Ω, 500mW	SOD-123	5d	1k	Vs
YH	-	BZX384C11-V-G	Zener diode	11V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
YH	-	P4SMAJ30C	TVS	Vrwm=30V, 7.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YH	-	PZU22B1A/DG	Zener diode	22V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
YH	-	SMAJ30C	TVS	Vrwm=30V, Vbr=33.3..40.7V, 7.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YH	-	SMZG3804B	Zener diode	43V±10%, 28mA, Zzt=53Ω, 1.5W	DO-215AA	5d	1k	Vs
YH	-	SMZJ3804B	Zener diode	43V±10%, 28mA, Zzt=53Ω, 1.5W	DO-214AA	1d	1k	Vs
YH	-	TV04A300KB-G	TVS	Vrwm=30.0V, Vbr=33.30..40.70V, Ipp=7.48A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YI	-	BZT52C12-V-G	Zener diode	12V±5%, Izt=5mA, Zzt=25Ω, 500mW	SOD-123	5d	1k	Vs
YI	-	BZX384C12-V-G	Zener diode	12V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
YI	-	SMZG3805A	Zener diode	47V±5%, 26mA, Zzt=67Ω, 1.5W	DO-215AA	5d	1k	Vs
YI	-	SMZJ3805A	Zener diode	47V±5%, 26mA, Zzt=67Ω, 1.5W	DO-214AA	1d	1k	Vs
YJ	-	SMZG3805B	Zener diode	47V±10%, 26mA, Zzt=67Ω, 1.5W	DO-215AA	5d	1k	Vs
YJ	-	SMZJ3805B	Zener diode	47V±10%, 26mA, Zzt=67Ω, 1.5W	DO-214AA	1d	1k	Vs
YK	-	BZT52C13-V-G	Zener diode	13V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1k	Vs
YK	-	BZX384C13-V-G	Zener diode	13V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
YK	-	P4SMAJ30CA	TVS	Vrwm=30V, 8.3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YK	-	PMF30CA	TVS	Vbr=33.3..36.8V, Vrwm=30V, Ipp=4.13A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
YK	-	PZU22B2A/DG	Zener diode	22V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YK	-	SMAJ30CA	TVS	Vrwm=30V, Vbr=33.3..36.8V, 8.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YK	-	SMZG3806A	Zener diode	51V±5%, 24mA, Zzt=70Ω, 1.5W	DO-215AA	5d	1k	Vs
YK	-	SMZJ3806A	Zener diode	51V±5%, 24mA, Zzt=70Ω, 1.5W	DO-214AA	1d	1k	Vs
YK	-	TV04A300JB-G	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=8.26A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YL	-	BZT52C15-V-G	Zener diode	15V±5%, Izt=5mA, Zzt=30Ω, 500mW	SOD-123	5d	1k	Vs
YL	-	BZX384C15-V-G	Zener diode	15V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
YL	-	P4SMAJ33C	TVS	Vrwm=33V, 6.8A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YL	-	PZU22B3A/DG	Zener diode	22V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YL	-	SMAJ33C	TVS	Vrwm=33V, Vbr=36.7..44.9V, 6.8A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YL	-	SMZG3806B	Zener diode	51V±10%, 24mA, Zzt=70Ω, 1.5W	DO-215AA	5d	1k	Vs
YL	-	SMZJ3806B	Zener diode	51V±10%, 24mA, Zzt=70Ω, 1.5W	DO-214AA	1d	1k	Vs
YL	-	TV04A330KB-G	TVS	Vrwm=33.0V, Vbr=36.70..44.90V, Ipp=6.78A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YLA	-	3.0SMC20A	TVS	Vrwm=20.0V, Vbr=22.20..24.50V, Ipp=740A, 3000W(20?s)	DO-214AB	1d	2s	Lif
YLC	-	3.0SMC24A	TVS	Vrwm=24.0V, Vbr=26.70..29.50V, Ipp=520A, 3000W(20?s)	DO-214AB	1d	2s	Lif
YLE	-	3.0SMC28A	TVS	Vrwm=28.0V, Vbr=31.10..34.40V, Ipp=470A, 3000W(20?s)	DO-214AB	1d	2s	Lif
YLF	-	3.0SMC30A	TVS	Vrwm=30.0V, Vbr=33.30..36.80V, Ipp=420A, 3000W(20?s)	DO-214AB	1d	2s	Lif
YLG	-	3.0SMC33A	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=365A, 3000W(20?s)	DO-214AB	1d	2s	Lif
YM	-	BZT52C16-V-G	Zener diode	16V±5%, Izt=5mA, Zzt=40Ω, 500mW	SOD-123	5d	1k	Vs
YM	-	BZX384C16-V-G	Zener diode	16V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
YM	-	P4SMAJ33CA	TVS	Vrwm=33V, 7.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YM	-	PMF33CA	TVS	Vbr=36.7..40.6V, Vrwm=33V, Ipp=3.75A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
YM	-	PZU24BA/DG	Zener diode	24V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YM	-	SMAJ33CA	TVS	Vrwm=33V, Vbr=36.7..40.6V, 7.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YM	-	TV04A330JB-G	TVS	Vrwm=33.0V, Vbr=36.70..40.60V, Ipp=7.50A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YN	-	BZT52C18-V-G	Zener diode	18V±5%, Izt=5mA, Zzt=45Ω, 500mW	SOD-123	5d	1k	Vs
YN	-	BZX384C18-V-G	Zener diode	18V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-323	5d	2m	Vs
YN	-	P4SMAJ36C	TVS	Vrwm=36V, 6.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YN	-	PZU24B1A/DG	Zener diode	24V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YN	-	SMAJ36C	TVS	Vrwm=36V, Vbr=40.0..48.9V, 6.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YN	-	TV04A360KB-G	TVS	Vrwm=36.0V, Vbr=40.0..48.90V, Ipp=6.22A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YO	-	BZT52C20-V-G	Zener diode	20V±5%, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1k	Vs
YO	-	BZX284-C2V4	Zener diode	2.4V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
YO	-	BZX384C20-V-G	Zener diode	20V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-323	5d	2m	Vs
YP	-	BZT52C22-V-G	Zener diode	22V±5%, Izt=5mA, Zzt=55Ω, 500mW	SOD-123	5d	1k	Vs
YP	-	BZX284-C2V7	Zener diode	2.7V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
YP	-	BZX384C22-V-G	Zener diode	22V±5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-323	5d	2m	Vs
YP	-	CMDZ15L	Zener diode	14.25..15.75V, Izt=0.5mA, Zzt=80Ω, 250mW	SOD-323	5d	1a	Cen
YP	-	DDZ6V8C	Zener diode	6.8V±5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
YP	-	DDZ6V8CS	Zener diode	6.8V±5%, Izt=20mA, 200mW	SOD-323	5d	1d	Di
YP	-	P4SMAJ36CA	TVS	Vrwm=36V, 6.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YP	-	PMF36CA	TVS	Vbr=40.0..44.2V, Vrwm=36V, Ipp=3.44A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
YP	-	PZU24B2A/DG	Zener diode	24V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YP	-	SMAJ36CA	TVS	Vrwm=36V, Vbr=40.0..44.2V, 6.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YP	-	TV04A360JB-G	TVS	Vrwm=36.0V, Vbr=40.0..44.20V, Ipp=6.88A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YQ	-	BZX284-C3V0	Zener diode	3V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
YQ	-	DDZ7V5C	Zener diode	7.5V±5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
YQ	-	DDZ7V5CS	Zener diode	7.5V±5%, Izt=20mA, 200mW	SOD-323	5d	1d	Di
YQ	-	P4SMAJ40C	TVS	Vrwm=40V, 5.6A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YQ	-	SMAJ40C	TVS	Vrwm=40V, Vbr=44.4..54.3V, 5.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YQ	-	TV04A400KB-G	TVS	Vrwm=40.0V, Vbr=44.40..54.30V, Ipp=5.60A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YR	-	BZT52C24-V-G	Zener diode	24V±5%, Izt=5mA, Zzt=70Ω, 500mW	SOD-123	5d	1k	Vs
YR	-	BZX284-C3V3	Zener diode	3.3V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
YR	-	BZX384C24-V-G	Zener diode	24V±5%, Izt=2mA, Zzt=25Ω, 200mW	SOD-323	5d	2m	Vs
YR	-	DDZ8V2C	Zener diode	8.2V±5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
YR	-	DDZ8V2CS	Zener diode	8.2V±5%, Izt=20mA, 200mW	SOD-323	5d	1d	Di

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
YR	-	P4SMAJ40CA	TVS	Vrwm=40V, 6.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YR	-	PMF40CA	TVS	Vbr=44.4..49.1V, Vrwm=40V, Ipp=3.10A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
YR	-	PZU24B3A/DG	Zener diode	24V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YR	-	SMAJ40CA	TVS	Vrwm=40V, Vbr=44.4..49.1V, 6.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YR	-	TV04A400JB-G	TVS	Vrwm=40.0V, Vbr=44.40..49.10V, Ipp=6.20A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YS	-	BZT52C27-V-G	Zener diode	27V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1k	Vs
YS	-	BZX284-C3V6	Zener diode	3.6V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
YS	-	BZX384C27-V-G	Zener diode	27V±5%, Izt=2mA, Zzt=25Ω, 200mW	SOD-323	5d	2m	Vs
YS	-	DDZ9V1C	Zener diode	9.1V±5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
YS	-	DDZ9V1CS	Zener diode	9.1V±5%, Izt=20mA, 200mW	SOD-323	5d	1d	Di
YS	-	P4SMAJ180C	TVS	Vrwm=180V, 1.2A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
YS	-	P4SMAJ43C	TVS	Vrwm=43V, 5.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YS	-	PZU27BA/DG	Zener diode	27V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YS	-	SMAJ43C	TVS	Vrwm=43V, Vbr=47.8..58.4V, 5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YS	-	TV04A430KB-G	TVS	Vrwm=43.0V, Vbr=47.80..58.40V, Ipp=5.22A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YT	-	BZT52C30-V-G	Zener diode	30V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1k	Vs
YT	-	BZX284-C3V9	Zener diode	3.9V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
YT	-	BZX384C30-V-G	Zener diode	30V±5%, Izt=2mA, Zzt=30Ω, 200mW	SOD-323	5d	2m	Vs
YT	-	DDZ10C	Zener diode	10V±5%, Izt=20mA, 500mW	SOD-123	5d	1d	Di
YT	-	DDZ10CS	Zener diode	10V±5%, Izt=20mA, 200mW	SOD-323	5d	1d	Di
YT	-	P4SMAJ180CA	TVS	Vrwm=180V, 1.3A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
YT	-	P4SMAJ43CA	TVS	Vrwm=43V, 5.7A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YT	-	PMF43CA	TVS	Vbr=47.8..52.8V, Vrwm=43V, Ipp=2.88A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
YT	-	PZU3.0BA/DG	Zener diode	3.0V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YT	-	SMAJ43CA	TVS	Vrwm=43V, Vbr=47.8..52.8V, 5.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YT	-	TV04A430JB-G	TVS	Vrwm=43.0V, Vbr=47.80..52.80V, Ipp=5.76A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YU	-	BZT52C33-V-G	Zener diode	33V±5%, Izt=5mA, Zzt=80Ω, 500mW	SOD-123	5d	1k	Vs
YU	-	BZX284-C4V3	Zener diode	4.3V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
YU	-	BZX384C33-V-G	Zener diode	33V±5%, Izt=2mA, Zzt=35Ω, 200mW	SOD-323	5d	2m	Vs
YU	-	CESD12VD3	ESDP-diode	Vrwm=3.3V, Vbr=5.0..5.9V, Ipp=15A, 350W(1ms)	SOD-123	5d	1a	Jce
YU	-	DDZ11C	Zener diode	11V±5%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
YU	-	DDZ11CS	Zener diode	11V±5%, Izt=10mA, 200mW	SOD-323	5d	1d	Di
YU	-	P4SMAJ190C	TVS	Vrwm=190V, 1.2A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
YU	-	P4SMAJ45C	TVS	Vrwm=45V, 5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YU	-	PZU3.0B1A/DG	Zener diode	3.0V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YU	-	SMAJ45C	TVS	Vrwm=45V, Vbr=50.0..61.1V, 5A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YU	-	TV04A450KB-G	TVS	Vrwm=45.0V, Vbr=50.0..61.10V, Ipp=4.98A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YV	-	BZX284-C4V7	Zener diode	4.7V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
YV	-	DDZ12C	Zener diode	12V±5%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
YV	-	DDZ12CS	Zener diode	12V±5%, Izt=10mA, 200mW	SOD-323	5d	1d	Di
YV	-	P4SMAJ190CA	TVS	Vrwm=190V, 1.3A, 400W (1ms), Bidir.	DO-214AB	1ba	1j	Pjt
YV	-	P4SMAJ45CA	TVS	Vrwm=45V, 5.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YV	-	PMF45CA	TVS	Vbr=50.0..55.3V, Vrwm=45V, Ipp=2.75A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
YV	-	PZU3.0B2A/DG	Zener diode	3.0V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YV	-	SMAJ45CA	TVS	Vrwm=45V, Vbr=50.0..55.3V, 5.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YV	-	TV04A450JB-G	TVS	Vrwm=45.0V, Vbr=50.0..55.30V, Ipp=5.50A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YW	-	BZT52C36-V-G	Zener diode	36V±5%, Izt=5mA, Zzt=90Ω, 500mW	SOD-123	5d	1k	Vs
YW	-	BZX284-C5V1	Zener diode	5.1V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
YW	-	BZX384C36-V-G	Zener diode	36V±5%, Izt=2mA, Zzt=35Ω, 200mW	SOD-323	5d	2m	Vs
YW	-	DDZ13C	Zener diode	13V±5%, 2Izt=10mA, 500mW	SOD-123	5d	1d	Di
YW	-	P4SMAJ200C	TVS	Vrwm=200V, 1.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
YW	-	P4SMAJ48C	TVS	Vrwm=48V, 4.7A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YW	-	PZU3.3BA/DG	Zener diode	3.3V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YW	-	SMAJ48C	TVS	Vrwm=48V, Vbr=53.3..65.1V, 4.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YW	-	TV04A480KB-G	TVS	Vrwm=48.0V, Vbr=53.30..65.10V, Ipp=4.68A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YX	-	BZT52C39-V-G	Zener diode	39V±5%, Izt=5mA, Zzt=130Ω, 500mW	SOD-123	5d	1k	Vs
YX	-	BZX284-C5V6	Zener diode	5.6V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
YX	-	BZX384C39-V-G	Zener diode	39V±5%, Izt=2mA, Zzt=40Ω, 200mW	SOD-323	5d	2m	Vs
YX	-	P4SMAJ200CA	TVS	Vrwm=200V, 1.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
YX	-	P4SMAJ48CA	TVS	Vrwm=48V, 5.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YX	-	PMF48CA	TVS	Vbr=53.3..58.9V, Vrwm=48V, Ipp=2.58A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
YX	-	PZU3.3B1A/DG	Zener diode	3.3V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YX	-	SMAJ48CA	TVS	Vrwm=48V, Vbr=53.3..58.9V, 5.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YX	-	TV04A480JB-G	TVS	Vrwm=48.0V, Vbr=53.30..58.90V, Ipp=5.17A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YY	-	BZT52C43-V-G	Zener diode	43V±5%, Izt=5mA, Zzt=60Ω, 500mW	SOD-123	5d	1k	Vs
YY	-	BZX284-C6V2	Zener diode	6.2V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
YY	-	BZX384C43-V-G	Zener diode	43V±5%, Izt=2mA, Zzt=45Ω, 200mW	SOD-323	5d	2m	Vs
YY	-	DDZ16S	Zener diode	16V±10%, Izt=10mA, 200mW	SOD-323	5d	1d	Di
YY	-	P4SMAJ210C	TVS	Vrwm=210V, 1.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
YY	-	P4SMAJ51C	TVS	Vrwm=51V, 4.4A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
YY	-	PZU3.3B2A/DG	Zener diode	3.3V±2%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YY	-	SMAJ51C	TVS	Vrwm=51V, Vbr=56.7..69.3V, 4.4A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YY	-	TV04A510KB-G	TVS	Vrwm=51.0V, Vbr=56.70..69.30V, Ipp=4.39A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
YZ	-	BZT52B47S	Zener diode	46.06..47.94V, Izt=2mA, Zzt=170Ω, 200mW	SOD-323FL	7d	1a	Tsc
YZ	-	BZT52C47-V-G	Zener diode	47V±5%, Izt=5mA, Zzt=70Ω, 500mW	SOD-123	5d	1k	Vs
YZ	-	BZX284-C6V8	Zener diode	6.8V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
YZ	-	BZX384C47-V-G	Zener diode	47V±5%, Izt=2mA, Zzt=50Ω, 200mW	SOD-323	5d	2m	Vs
YZ	-	DDZ18C	Zener diode	18V±5%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
YZ	-	DDZ18CS	Zener diode	18V±5%, Izt=10mA, 200mW	SOD-323	5d	1d	Di
YZ	-	MM3Z47VB	Zener diode	46.06..47.94V, Zzt=160Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
YZ	-	MM3Z47VBW	Zener diode	46.06..47.94V, Izt=2mA, Zzt=170Ω, 200mW	SOD-323FL	7d	1a	Tac
YZ	-	P4SMAJ210CA	TVS	Vrwm=210V, 1.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
YZ	-	P4SMAJ51CA	TVS	Vrwm=51V, 4.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
YZ	-	PMF51CA	TVS	Vbr=56.7..62.7V, Vrwm=51V, Ipp=2.43A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
YZ	-	PZU3.6BA/DG	Zener diode	3.6V±5%, If=200mA, 320mW, halogen-free	SOD-323	5d	1a	Phi
YZ	-	SMAJ51CA	TVS	Vrwm=51V, Vbr=56.7..69.3V, 4.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
YZ	-	TCMM3Z47VB	Zener diode	47V±2%, Izt=5mA, Zzt=160Ω, 200mW	SOD-323FL	7d	1a	Tac
YZ	-	TV04A510JB-G	TVS	Vrwm=51.0V, Vbr=56.70..62.70V, Ipp=4.85A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
Z	-	BB145B	C-diode	VCO, 8V, 20mA, 2.55/6.4pF(4V/1V, 1MHz), <0.6Ω	SOD-523	6d	1a	Phi
Z	-	EP10LA03	Si-diode	SBR, 30V, 1A, Vf<0.39V(1A)	SOD-123	5d	1a	Nih
Z	-	MMSZ5227BPT	Zener diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 225mW	SOD-523	6d	1a	Chm
Z	ap	BZT52B62S	Zener diode	60.76..63.24V, Izt=2mA, Zzt=215Ω, 200mW	SOD-323FL	7d	1a	Tsc
Z	ap	MM3Z62VB	Zener diode	60.76..63.24V, Zzt=202Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
Z	ap	MM3Z62VBW	Zener diode	60.76..63.24V, Izt=2mA, Zzt=215Ω, 200mW	SOD-323FL	7d	1a	Tac
Z	ap	TCMM3Z62VB	Zener diode	62V±2%, Izt=5mA, Zzt=202Ω, 200mW	SOD-323FL	7d	1a	Tac
Z	ar	MM3Z62VC	Zener diode	58.9..65.1V, Zzt=202Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
Z	ar	TCMM3Z62VC	Zener diode	62V±5%, Izt=5mA, Zzt=202Ω, 200mW	SOD-323FL	7d	1a	Tac
-Z	-	BZT52B51S	Zener diode	49.98..52.02V, Izt=2mA, Zzt=180Ω, 200mW	SOD-323FL	7d	1a	Tsc
-Z	-	MM3Z51VBW	Zener diode	49.98..52.02V, Izt=2mA, Zzt=180Ω, 200mW	SOD-323FL	7d	1a	Tac
-Z	-	TCMM3Z51VB	Zener diode	51V±2%, Izt=5mA, Zzt=169Ω, 200mW	SOD-323FL	7d	1a	Tac
Z-	-	TCMM3Z51VC	Zener diode	51V±5%, Izt=5mA, Zzt=169Ω, 200mW	SOD-323FL	7d	1a	Tac
Z.	-	MMSZ5227SPT	Zener diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 225mW	SOD-523	6d	1a	Chm
Z_	-	MM3Z51VC	Zener diode	48.45..53.55V, Zzt=169Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
Z<	-	MM3Z75VC	Zener diode	71.25..75 78.75 240Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
Z<	-	TCMM3Z75VC	Zener diode	75V±5%, Izt=5mA, Zzt=240Ω, 200mW	SOD-323FL	7d	1a	Tac
Z=	-	MM3Z56VC	Zener diode	53.2..58.8V, Zzt=188Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
Z=	-	TCMM3Z56VC	Zener diode	56V±5%, Izt=5mA, Zzt=188Ω, 200mW	SOD-323FL	7d	1a	Tac
Z>	-	MM3Z68VC	Zener diode	64.6..71.4V, Zzt=226Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
Z>	-	TCMM3Z68VC	Zener diode	68V±5%, Izt=5mA, Zzt=226Ω, 200mW	SOD-323FL	7d	1a	Tac
Z0	-	BZT52B4V3WS	Zener diode	4.214..4.386V, Izt=5mA, 300mW	SOD-323F	7d	1a	Ttr
Z0	-	CD0603-Z2	Zener diode	1.9..2.1V, 5mA, Zzt=100Ω, 150mW	0603	70d	2b	Brn
Z0	-	CD1005-Z2	Zener diode	1.9..2.1V, 5mA, Zzt=100Ω, 200mW	1005	70d	2b	Brn
Z0	-	CZRER52C2	Zener diode	1.90..2.10V, Izt=5mA, Zzt=100Ω, 150mW	SOD-723F	70d	2b	Cmc
Z0	-	CZRERT52C2	Zener diode	1.90..2.10V, Izt=5mA, Zzt=100Ω, 150mW	SOD-723F	70d	2b	Cmc
Z0	-	CZRF52C2	Zener diode	1.90..2.10V, Izt=5mA, Zzt=100Ω, 200mW	1005	70d	2b	Cmc
Z0	-	CZRFR52C2	Zener diode	1.90..2.10V, Izt=5mA, Zzt=100Ω, 200mW	1005	70d	2b	Cmc
Z0	-	CZRQR52C2	Zener diode	1.90..2.10V, Izt=5mA, Zzt=100Ω, 125mW	0402	70d	2b	Cmc
Z0	-	CZRUR52C2	Zener diode	1.90..2.10V, Izt=5mA, Zzt=100Ω, 150mW	0603	70d	2b	Cmc
Z0	-	MM3Z2V4C	Zener diode	2.28..2.52V, Zzt=94Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
Z0	-	MM3Z4B3H	Zener diode	4.214..4.386V, Izt=5mA, Zzt=130Ω, 300mW	SOD-323	5d	1a	Zow
Z0	-	PDZ2.4B	Zener diode	2.4V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
Z0	-	TCMM3Z2V4C	Zener diode	2.4V±5%, Izt=5mA, Zzt=94Ω, 200mW	SOD-323FL	7d	1a	Tac
Z0	-	TSZL52C2V0	Zener diode	1.90..2.10V, Izt=5mA, Zzt=100Ω, 200mW	1005	70d	2d	Tsc
Z0	-	TSZU52C2V0	Zener diode	1.90..2.10V, Izt=5mA, Zzt=100Ω, 150mW	0603	70d	2d	Tsc
Z0G	-	PD3Z284C5V1	Zener diode	5.1..5.4V, 5mA, Zzt=60, 500mW	PowDI323	7d	1d	Di
Z0H	-	PD3Z284C5V6	Zener diode	5.6..6.0V, 5mA, Zzt=40, 500mW	PowDI323	7d	1d	Di
Z0K	-	PD3Z284C6V2	Zener diode	6.2..6.6V, 5mA, Zzt=10, 500mW	PowDI323	7d	1d	Di
Z0L	-	PD3Z284C6V8	Zener diode	6.8..7.2V, 5mA, Zzt=15, 500mW	PowDI323	7d	1d	Di
Z0M	-	PD3Z284C7V5	Zener diode	7.5..7.9V, 5mA, Zzt=10, 500mW	PowDI323	7d	1d	Di
Z0N	-	PD3Z284C8V2	Zener diode	8.2..8.7V, 5mA, Zzt=10, 500mW	PowDI323	7d	1d	Di
Z0P	-	PD3Z284C9V1	Zener diode	9.1..9.6V, 5mA, Zzt=10, 500mW	PowDI323	7d	1d	Di
Z0Q	-	PD3Z284C10	Zener diode	10..10.6V, 5mA, Zzt=10Ω, 500mW	PowDI323	7d	1d	Di
Z0R	-	PD3Z284C11	Zener diode	11..11.6V, 5mA, Zzt=10, 500mW	PowDI323	7d	1d	Di
Z0S	-	PD3Z284C12	Zener diode	12..12.7V, 5mA, Zzt=10, 500mW	PowDI323	7d	1d	Di
Z1	-	BZF10C18	Zener diode	17.1..18.9V, Izt=14mA, Zzt=20Ω, 1W	SOD-123F	6d	1a	Did
Z1	-	BZT52C4V7T	Zener diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 100mW	SOD-523	6d	1a	Mco
Z1	-	BZT52C51-V-G	Zener diode	51V±5%, Izt=5mA, Zzt=70Ω, 500mW	SOD-123	5d	1k	Vs
Z1	-	BZX384C51-V-G	Zener diode	51V±5%, Izt=2mA, Zzt=60Ω, 200mW	SOD-323	5d	2m	Vs
Z1	-	CD0603-Z2V2	Zener diode	2.09..2.31V, 5mA, Zzt=100Ω, 150mW	0603	70d	2b	Brn
Z1	-	CD1005-Z2V2	Zener diode	2.09..2.31V, 5mA, Zzt=100Ω, 200mW	1005	70d	2b	Brn

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
Z1	-	CZRER52C2V2	Zener diode	2.09..2.31V, Izt=5mA, Zzt=100Ω, 150mW	SOD-723F	70d	2b	Cmc
Z1	-	CZRERT52C2V2	Zener diode	2.09..2.31V, Izt=5mA, Zzt=100Ω, 150mW	SOD-723F	70d	2b	Cmc
Z1	-	CZRF52C2V2	Zener diode	2.09..2.31V, Izt=5mA, Zzt=100Ω, 200mW	1005	70d	2b	Cmc
Z1	-	CZRFR52C2V2	Zener diode	2.09..2.31V, Izt=5mA, Zzt=100Ω, 200mW	1005	70d	2b	Cmc
Z1	-	CZRQR52C2V2	Zener diode	2.09..2.31V, Izt=5mA, Zzt=100Ω, 125mW	0402	70d	2b	Cmc
Z1	-	CZRUR52C2V2	Zener diode	2.09..2.31V, Izt=5mA, Zzt=100Ω, 150mW	0603	70d	2b	Cmc
Z1	-	KL3Z07	Thy-SPD	V Of-St=5.5V, Ifsm=30A(1ms), Ih=50mA, Bidir.	1F	1ba	1l	Shi
Z1	-	KL3Z18	Thy-SPD	V Of-St=15.5V, Ifsm=30A(1ms), Ih=50mA, Bidir.	1F	1ba	1l	Shi
Z1	-	MFPZ4746A	Zener diode	17.1..18.9V, Izt=14.0mA, 1W	SOD-123F	7d	1a	Ttr
Z1	-	MM3Z2V7C	Zener diode	2.57..2.84V, Zzt=94Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
Z1	-	MM3Z5240B	Zener diode	10V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOD-323FL	7d	1a	Bts
Z1	-	MM3Z5240BH	Zener diode	9.5..10.5V, Izt=20mA, Zzt=17Ω, 300mW	SOD-323	5d	1a	Zow
Z1	-	MM5Z4V7	Zener diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Sec
Z1	-	MMSZ43T	Zener diode	43V±5%, Izt=5mA, Zzt=150Ω, 500mW	SOD-123	5d	1u	Mot
Z1	-	PDZ2.7B	Zener diode	2.7V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
Z1	-	TCMM3Z2V7C	Zener diode	2.7V±5%, Izt=5mA, Zzt=94Ω, 200mW	SOD-323FL	7d	1a	Tac
Z1	-	TSZL52C2V2	Zener diode	2.09..2.31V, Izt=5mA, Zzt=100Ω, 200mW	1005	70d	2d	Tsc
Z1	-	TSZU52C2V2	Zener diode	2.09..2.31V, Izt=5mA, Zzt=100Ω, 150mW	0603	70d	2d	Tsc
Z1	-	VGFM02-C18-M	TVS	Vrwm=15.3V, Vbr=17.1..18.9V, 7.95A, 200W(1ms)	SOD-123F	6d	1a	Frm
Z1	-	ZD5248BSG	Zener diode	18V±5%, 5mA, Zzt=42Ω, 500mW	SOD-323-S	7d	1a	Cys
Z1	-	ZGFM1018-MH	Zener diode	18V±10%, Zzt=20Ω(Izt=14mA), 1W	SOD-123H	10d	1a	Frm
Z1	-	ZGFM1018-N	Zener diode	17.1..18.9V, Izt=14mA, Zzt=20Ω, 1W	SOD-123F	6d	1a	Frm
Z10	-	BZA10C10	Zener diode	9.5..10.5V, Izt=25mA, Zzt=7Ω, 1W	SMA-F	10d	1a	Did
Z10	-	CZRA4740-G	Zener diode	10V±5%, Izt=25mA, Zzt=7Ω, 1W	DO-214AC	1d	1a	Cmc
Z10	-	DFLZ10	Zener diode	10V±5%, Izt=50mA, Zzt<4Ω, 1W	SOD-123FL	7d	1d	Mco
Z10	-	SMAZ10	Zener diode	10V±5%, 50mA, Zzt<4Ω, 1W	DO-214AC	1d	1a	Exc
Z10	-	SMFZ10V	Zener diode	10.0..11.2V, Izt=40mA, 1W	SMF	9d	2z	Kec
Z10	-	SODZ10A-SH	Zener diode	10V±5%, Izt=25mA, 1W	SOD-123FL	7d	1a	Lrc
Z10	-	ZS4740A	Zener diode	10V±5%, 25mA, Zzt=7Ω, 1W	SMA-1	10d	1a	Frm
Z100	-	SODZ100A-SH	Zener diode	100V±5%, Izt=2.5mA, 1W	SOD-123FL	7d	1a	Lrc
Z100A	-	SZA100A	Zener diode	100V±5%, Izt=2.5mA, 1W	DO-214AC	1d	1a	Lrc
Z10A	-	SZA10A	Zener diode	10V±5%, Izt=25mA, 1W	DO-214AC	1d	1a	Lrc
Z10V	-	CZRM5240B-HF	Zener diode	9.5..10.50V, Zzt=17Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z10V	-	MMSZ5240B	Zener diode	10V±5%, Izt=20mA, Zzt=17Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z10V	-	MMSZ5240BSW	Zener diode	10V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOD-323FL	7d	1a	Tac
Z10V	-	MMSZ5240BW	Zener diode	10V±5%, Izt=20mA, Zzt=17Ω, 500mW	SOD-123FL	7d	1a	Tac
Z10V	-	TCMMSZ5240B	Zener diode	10V±5%, Izt=20mA, Zzt=17Ω, 500mW	SOD-123FL	7d	1a	Tac
Z11	-	BZA10C11	Zener diode	10.45..11.55V, Izt=23mA, Zzt=8Ω, 1W	SMA-F	10d	1a	Did
Z11	-	BZD2C11P	Zener diode	11V±5%, Izt=50mA, 1W	DO-219AA	7d	2n	Fag
Z11	-	BZT52C2V4T	Zener diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 100mW	SOD-523	6d	1a	Mco
Z11	-	CZRA4741-G	Zener diode	11V±5%, Izt=23mA, Zzt=8Ω, 1W	DO-214AC	1d	1a	Cmc
Z11	-	DFLZ11	Zener diode	11V±5%, Izt=50mA, Zzt<7Ω, 1W	SOD-123FL	7d	1d	Mco
Z11	-	MM5Z2V4	Zener diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 100mW	SOD-523	6d	1a	Sec
Z11	-	SMFZ11V	Zener diode	11.0..12.3V, Izt=20mA, 1W	SMF	9d	2z	Kec
Z11	-	SODZ11A-SH	Zener diode	11V±5%, Izt=23mA, 1W	SOD-123FL	7d	1a	Lrc
Z11	-	ZS4741A	Zener diode	11V±5%, 23mA, Zzt=8Ω, 1W	SMA-1	10d	1a	Frm
Z110	-	SODZ110A-SH	Zener diode	110V±5%, Izt=2mA, 1W	SOD-123FL	7d	1a	Lrc
Z110A	-	SZA110A	Zener diode	110V±5%, Izt=2mA, 1W	DO-214AC	1d	1a	Lrc
Z11A	-	SZA11A	Zener diode	11V±5%, Izt=23mA, 1W	DO-214AC	1d	1a	Lrc
Z11V	-	CZRM5241B-HF	Zener diode	10.45..11.55V, Zzt=22Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z11V	-	MMSZ5241B	Zener diode	11V±5%, Izt=20mA, Zzt=22Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z11V	-	MMSZ5241BSW	Zener diode	11V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOD-323FL	7d	1a	Tac
Z11V	-	MMSZ5241BW	Zener diode	11V±5%, Izt=20mA, Zzt=22Ω, 500mW	SOD-123FL	7d	1a	Tac
Z11V	-	TCMMSZ5241B	Zener diode	11V±5%, Izt=20mA, Zzt=22Ω, 500mW	SOD-123FL	7d	1a	Tac
Z12	-	BZA10C12	Zener diode	11.4..12.6V, Izt=21mA, Zzt=9Ω, 1W	SMA-F	10d	1a	Did
Z12	-	BZD2C12P	Zener diode	12V±5%, Izt=50mA, 1W	DO-219AA	7d	2n	Fag
Z12	-	BZT52C2V7T	Zener diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 100mW	SOD-523	6d	1a	Mco
Z12	-	CZRA4742-G	Zener diode	12V±5%, Izt=21mA, Zzt=9Ω, 1W	DO-214AC	1d	1a	Cmc
Z12	-	DFLZ12	Zener diode	12V±5%, Izt=50mA, Zzt<7Ω, 1W	SOD-123FL	7d	1d	Mco
Z12	-	MM5Z2V7	Zener diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 100mW	SOD-523	6d	1a	Sec
Z12	-	SMAZ12	Zener diode	12V±5%, 50mA, Zzt<7Ω, 1W	DO-214AC	1d	1a	Exc
Z12	-	SMFZ12V	Zener diode	12.0..13.5V, Izt=20mA, 1W	SMF	9d	2z	Kec
Z12	-	SODZ12A-SH	Zener diode	12V±5%, Izt=21mA, 1W	SOD-123FL	7d	1a	Lrc
Z12	-	ZS4742A	Zener diode	12V±5%, 21mA, Zzt=9Ω, 1W	SMA-1	10d	1a	Frm
Z120	-	SODZ120A-SH	Zener diode	120V±5%, Izt=1.5mA, 1W	SOD-123FL	7d	1a	Lrc
Z120A	-	SZA120A	Zener diode	120V±5%, Izt=1.5mA, 1W	DO-214AC	1d	1a	Lrc
Z12A	-	SZA12A	Zener diode	12V±5%, Izt=21mA, 1W	DO-214AC	1d	1a	Lrc
Z12V	-	CZRM5242B-HF	Zener diode	11.40..12.60V, Zzt=30Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z12V	-	MMSZ5242B	Zener diode	12V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z12V	-	MMSZ5242BSW	Zener diode	12V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tac

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
Z12V	-	MMSZ5242BW	Zener diode	12V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tac
Z12V	-	TCMMSZ5242B	Zener diode	12V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tac
Z13	-	BZA10C13	Zener diode	12.35..13.65V, Izt=19mA, Zzt=10Ω, 1W	SMA-F	10d	1a	Did
Z13	-	BZD2C13P	Zener diode	13V±5%, Izt=50mA, 1W	DO-219AA	7d	2n	Fag
Z13	-	BZT52C3V0T	Zener diode	3.0V±5%, Izt=5mA, Zzt=95Ω, 100mW	SOD-523	6d	1a	Mco
Z13	-	CZRA4743-G	Zener diode	13V±5%, Izt=19mA, Zzt=10Ω, 1W	DO-214AC	1d	1a	Cmc
Z13	-	DFLZ13	Zener diode	13V±5%, Izt=50mA, Zzt<10Ω, 1W	SOD-123FL	7d	1d	Mco
Z13	-	MM5Z3V0	Zener diode	3.0V±5%, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	6d	1a	Sec
Z13	-	SMFZ13V	Zener diode	13.3..15.0V, Izt=20mA, 1W	SMF	9d	2z	Kec
Z13	-	SODZ13A-SH	Zener diode	13V±5%, Izt=19mA, 1W	SOD-123FL	7d	1a	Lrc
Z13	-	ZS4743A	Zener diode	13V±5%, 19mA, Zzt=10Ω, 1W	SMA-1	10d	1a	Frm
Z130	-	SODZ130A-SH	Zener diode	130V±5%, Izt=1mA, 1W	SOD-123FL	7d	1a	Lrc
Z130A	-	SZA130A	Zener diode	130V±5%, Izt=1mA, 1W	DO-214AC	1d	1a	Lrc
Z13A	-	SZA13A	Zener diode	13V±5%, Izt=19mA, 1W	DO-214AC	1d	1a	Lrc
Z13V	-	CZRM5243B-HF	Zener diode	12.35..13.65V, Zzt=13Ω, Izt=9.5mA, 500mW	SOD-123F	7d	1a	Cmc
Z13V	-	MMSZ5243B	Zener diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z13V	-	MMSZ5243BSW	Zener diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 200mW	SOD-323FL	7d	1a	Tac
Z13V	-	MMSZ5243BW	Zener diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 500mW	SOD-123FL	7d	1a	Tac
Z13V	-	TCMMSZ5243B	Zener diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 500mW	SOD-123FL	7d	1a	Tac
Z14	-	BZT52C3V3T	Zener diode	3.3V±5%, Izt=5mA, Zzt=95Ω, 100mW	SOD-523	6d	1a	Mco
Z14	-	MM5Z3V3	Zener diode	3.3V±5%, Izt=5mA, Zzt=95Ω, 200mW	SOD-523	6d	1a	Sec
Z14V	-	CZRM5244B-HF	Zener diode	13.30..14.70V, Zzt=15Ω, Izt=9.0mA, 500mW	SOD-123F	7d	1a	Cmc
Z14V	-	MMSZ5244B	Zener diode	14V±5%, Izt=9mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z14V	-	MMSZ5244BSW	Zener diode	14V±5%, Izt=9mA, Zzt=15Ω, 200mW	SOD-323FL	7d	1a	Tac
Z14V	-	MMSZ5244BW	Zener diode	14V±5%, Izt=9mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tac
Z14V	-	TCMMSZ5244B	Zener diode	14V±5%, Izt=9mA, Zzt=15Ω, 500mW	SOD-123FL	7d	1a	Tac
Z15	-	BZA10C15	Zener diode	14.25..15.75V, Izt=17mA, Zzt=14Ω, 1W	SMA-F	10d	1a	Did
Z15	-	BZD2C15P	Zener diode	15V±5%, Izt=25mA, 1W	DO-219AA	7d	2n	Fag
Z15	-	BZT52C3V6T	Zener diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 100mW	SOD-523	6d	1a	Mco
Z15	-	CZRA4744-G	Zener diode	15V±5%, Izt=17mA, Zzt=14Ω, 1W	DO-214AC	1d	1a	Cmc
Z15	-	DFLZ15	Zener diode	15V±5%, Izt=50mA, Zzt<10Ω, 1W	SOD-123FL	7d	1d	Mco
Z15	-	MM5Z3V6	Zener diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Sec
Z15	-	SMAZ15	Zener diode	15V±5%, 50mA, Zzt<10Ω, 1W	DO-214AC	1d	1a	Exc
Z15	-	SMFZ15V	Zener diode	14.7..16.5V, Izt=20mA, 1W	SMF	9d	2z	Kec
Z15	-	SODZ15A-SH	Zener diode	15V±5%, Izt=17mA, 1W	SOD-123FL	7d	1a	Lrc
Z15	-	ZS4744A	Zener diode	15V±5%, 17mA, Zzt=14Ω, 1W	SMA-1	10d	1a	Frm
Z150	-	SODZ150A-SH	Zener diode	150V±5%, Izt=1mA, 1W	SOD-123FL	7d	1a	Lrc
Z150A	-	SZA150A	Zener diode	150V±5%, Izt=1mA, 1W	DO-214AC	1d	1a	Lrc
Z15A	-	SZA15A	Zener diode	15V±5%, Izt=17mA, 1W	DO-214AC	1d	1a	Lrc
Z15V	-	CZRM5245B-HF	Zener diode	14.25..15.75V, Zzt=16Ω, Izt=8.5mA, 500mW	SOD-123F	7d	1a	Cmc
Z15V	-	MMSZ5245B	Zener diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z15V	-	MMSZ5245BSW	Zener diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 200mW	SOD-323FL	7d	1a	Tac
Z15V	-	MMSZ5245BW	Zener diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 500mW	SOD-123FL	7d	1a	Tac
Z15V	-	TCMMSZ5245B	Zener diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 500mW	SOD-123FL	7d	1a	Tac
Z16	-	BZA10C16	Zener diode	15.2..16.8V, Izt=15.5mA, Zzt=16Ω, 1W	SMA-F	10d	1a	Did
Z16	-	BZD2C16P	Zener diode	16V±5%, Izt=25mA, 1W	DO-219AA	7d	2n	Fag
Z16	-	BZT52C3V9T	Zener diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 100mW	SOD-523	6d	1a	Mco
Z16	-	CZRA4745-G	Zener diode	16V±5%, Izt=15.5mA, Zzt=16Ω, 1W	DO-214AC	1d	1a	Cmc
Z16	-	DFLZ16	Zener diode	16V±5%, Izt=25mA, Zzt<15Ω, 1W	SOD-123FL	7d	1d	Mco
Z16	-	MM5Z3V9	Zener diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Sec
Z16	-	SMAZ16	Zener diode	16V±5%, 25mA, Zzt<15Ω, 1W	DO-214AC	1d	1a	Exc
Z16	-	SMFZ16V	Zener diode	16.2..18.3V, Izt=20mA, 1W	SMF	9d	2z	Kec
Z16	-	SODZ16A-SH	Zener diode	16V±5%, Izt=15.5mA, 1W	SOD-123FL	7d	1a	Lrc
Z16	-	ZS4745A	Zener diode	16V±5%, 15.5mA, Zzt=16Ω, 1W	SMA-1	10d	1a	Frm
Z160	-	SODZ160A-SH	Zener diode	160V±5%, Izt=1mA, 1W	SOD-123FL	7d	1a	Lrc
Z160A	-	SZA160A	Zener diode	160V±5%, Izt=1mA, 1W	DO-214AC	1d	1a	Lrc
Z16A	-	SZA16A	Zener diode	16V±5%, Izt=15.5mA, 1W	DO-214AC	1d	1a	Lrc
Z16V	-	CZRM5246B-HF	Zener diode	15.20..16.80V, Zzt=17Ω, Izt=7.8mA, 500mW	SOD-123F	7d	1a	Cmc
Z16V	-	MMSZ5246B	Zener diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z16V	-	MMSZ5246BSW	Zener diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 200mW	SOD-323FL	7d	1a	Tac
Z16V	-	MMSZ5246BW	Zener diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 500mW	SOD-123FL	7d	1a	Tac
Z16V	-	TCMMSZ5246B	Zener diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 500mW	SOD-123FL	7d	1a	Tac
Z17	-	BZT52C4V3T	Zener diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 100mW	SOD-523	6d	1a	Mco
Z17	-	MM5Z4V3	Zener diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 200mW	SOD-523	6d	1a	Sec
Z17V	-	CZRM5247B-HF	Zener diode	16.15..17.85V, Zzt=19Ω, Izt=7.4mA, 500mW	SOD-123F	7d	1a	Cmc
Z17V	-	MMSZ5247B	Zener diode	17V±5%, Izt=7.4mA, Zzt=19Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z17V	-	MMSZ5247BSW	Zener diode	17V±5%, Izt=7.4mA, Zzt=19Ω, 200mW	SOD-323FL	7d	1a	Tac
Z17V	-	MMSZ5247BW	Zener diode	17V±5%, Izt=7.4mA, Zzt=19Ω, 500mW	SOD-123FL	7d	1a	Tac
Z17V	-	TCMMSZ5247B	Zener diode	17V±5%, Izt=7.4mA, Zzt=19Ω, 500mW	SOD-123FL	7d	1a	Tac
Z18	-	BZA10C18	Zener diode	17.1..18.9V, Izt=14mA, Zzt=20Ω, 1W	SMA-F	10d	1a	Did

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
Z18	-	BZD2C18P	Zener diode	18V±5%, Izt=25mA, 1W	DO-219AA	7d	2n	Fag
Z18	-	CZRA4746-G	Zener diode	18V±5%, Izt=14mA, Zzt=20Ω, 1W	DO-214AC	1d	1a	Cmc
Z18	-	DFLZ18	Zener diode	18V±5%, Izt=25mA, Zzt<15Ω, 1W	SOD-123FL	7d	1d	Mco
Z18	-	SMAZ18	Zener diode	18V±5%, 25mA, Zzt<15Ω, 1W	DO-214AC	1d	1a	Exc
Z18	-	SMFZ18V	Zener diode	18.0..20.3V, Izt=20mA, 1W	SMF	9d	2z	Kec
Z18	-	SODZ18A-SH	Zener diode	18V±5%, Izt=14mA, 1W	SOD-123FL	7d	1a	Lrc
Z18	-	ZS4746A	Zener diode	18V±5%, 14mA, Zzt=20Ω, 1W	SMA-1	10d	1a	Frm
Z180	-	SODZ180A-SH	Zener diode	180V±5%, Izt=1mA, 1W	SOD-123FL	7d	1a	Lrc
Z180A	-	SZA180A	Zener diode	180V±5%, Izt=1mA, 1W	DO-214AC	1d	1a	Lrc
Z18A	-	SZA18A	Zener diode	18V±5%, Izt=14mA, 1W	DO-214AC	1d	1a	Lrc
Z18V	-	CZRM5248B-HF	Zener diode	17.10..18.90V, Zzt=21Ω, Izt=7.0mA, 500mW	SOD-123F	7d	1a	Cmc
Z18V	-	MMSZ5248B	Zener diode	18V±5%, Izt=7mA, Zzt=21Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z18V	-	MMSZ5248BSW	Zener diode	18V±5%, Izt=7mA, Zzt=21Ω, 200mW	SOD-323FL	7d	1a	Tac
Z18V	-	MMSZ5248BW	Zener diode	18V±5%, Izt=7mA, Zzt=21Ω, 500mW	SOD-123FL	7d	1a	Tac
Z18V	-	TCMMSZ5248B	Zener diode	18V±5%, Izt=7mA, Zzt=21Ω, 500mW	SOD-123FL	7d	1a	Tac
Z19V	-	CZRM5249B-HF	Zener diode	18.05..19.95V, Zzt=23Ω, Izt=6.6mA, 500mW	SOD-123F	7d	1a	Cmc
Z19V	-	MMSZ5249B	Zener diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z19V	-	MMSZ5249BSW	Zener diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 200mW	SOD-323FL	7d	1a	Tac
Z19V	-	MMSZ5249BW	Zener diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 500mW	SOD-123FL	7d	1a	Tac
Z19V	-	TCMMSZ5249B	Zener diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 500mW	SOD-123FL	7d	1a	Tac
Z2	-	BZF10C20	Zener diode	19.0..21.0V, Izt=12.5mA, Zzt=22Ω, 1W	SOD-123F	6d	1a	Did
Z2	-	BZT52C56-V-G	Zener diode	56V±5%, Izt=2.5mA, Zzt=135Ω, 500mW	SOD-123	5d	1k	Vs
Z2	-	BZT52C5V1T	Zener diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 100mW	SOD-523	6d	1a	Mco
Z2	-	BZX384C56-V-G	Zener diode	56V±5%, Izt=2mA, Zzt=70Ω, 200mW	SOD-323	5d	2m	Vs
Z2	-	CD0603-Z2V4	Zener diode	2.28..2.52V, 5mA, Zzt=85Ω, 150mW	0603	70d	2b	Brn
Z2	-	CD1005-Z2V4	Zener diode	2.28..2.52V, 5mA, Zzt=85Ω, 200mW	1005	70d	2b	Brn
Z2	-	CZRER52C2V4	Zener diode	2.28..2.52V, Izt=5mA, Zzt=85Ω, 150mW	SOD-723F	70d	2b	Cmc
Z2	-	CZRERT52C2V4	Zener diode	2.28..2.52V, Izt=5mA, Zzt=85Ω, 150mW	SOD-723F	70d	2b	Cmc
Z2	-	CZRF52C2V4	Zener diode	2.28..2.52V, Izt=5mA, Zzt=85Ω, 200mW	1005	70d	2b	Cmc
Z2	-	CZRFR52C2V4	Zener diode	2.28..2.52V, Izt=5mA, Zzt=85Ω, 200mW	1005	70d	2b	Cmc
Z2	-	CZRQR52C2V4	Zener diode	2.28..2.52V, Izt=5mA, Zzt=85Ω, 125mW	0402	70d	2b	Cmc
Z2	-	CZRUR52C2V4	Zener diode	2.28..2.52V, Izt=5mA, Zzt=85Ω, 150mW	0603	70d	2b	Cmc
Z2	-	MFPZ4747A	Zener diode	19.0..21.0V, Izt=12.5mA, 1W	SOD-123F	7d	1a	Ttr
Z2	-	MM3Z3V0C	Zener diode	2.85..3.15V, Zzt=89Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
Z2	-	MM3Z5261B	Zener diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 200mW	SOD-323FL	7d	1a	Bts
Z2	-	MM3Z5261BH	Zener diode	44.65..49.35V, Izt=2.7mA, Zzt=105Ω, 300mW	SOD-323	5d	1a	Zow
Z2	-	MM5Z5V1	Zener diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 200mW	SOD-523	6d	1a	Sec
Z2	-	MMSZ47T	Zener diode	47V±5%, Izt=5mA, Zzt=170Ω, 500mW	SOD-123	5d	1u	Mot
Z2	-	PDZ3.0B	Zener diode	3.0V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
Z2	-	TCMM3Z3V0C	Zener diode	3.0V±5%, Izt=5mA, Zzt=89Ω, 200mW	SOD-323FL	7d	1a	Tac
Z2	-	TSZL52C2V4	Zener diode	2.28..2.52V, Izt=5mA, Zzt=85Ω, 200mW	1005	70d	2d	Tsc
Z2	-	TSZU52C2V4	Zener diode	2.28..2.52V, Izt=5mA, Zzt=85Ω, 150mW	0603	70d	2d	Tsc
Z2	-	VGFM02-C20-M	TVS	Vrwm=17.1V, Vbr=19.0..21.0V, 7.20A, 200W(1ms)	SOD-123F	6d	1a	Frm
Z2	-	ZD5250BSG	Zener diode	20V±5%, 5mA, Zzt=48Ω, 500mW	SOD-323-S	7d	1a	Cys
Z2	-	ZGFM1020-MH	Zener diode	20V±10%, Zzt=22Ω(Izt=12mA), 1W	SOD-123H	10d	1a	Frm
Z2	-	ZGFM1020-N	Zener diode	19.0..21.0V, Izt=12.5mA, Zzt=22Ω, 1W	SOD-123F	6d	1a	Frm
Z20	-	BZA10C20	Zener diode	19..21V, Izt=12.5mA, Zzt=22Ω, 1W	SMA-F	10d	1a	Did
Z20	-	CZRA4747-G	Zener diode	20V±5%, Izt=12.5mA, Zzt=22Ω, 1W	DO-214AC	1d	1a	Cmc
Z20	-	DFLZ20	Zener diode	20V±5%, Izt=25mA, Zzt<15Ω, 1W	SOD-123FL	7d	1d	Mco
Z20	-	SMAZ20	Zener diode	20V±5%, 25mA, Zzt<15Ω, 1W	DO-214AC	1d	1a	Exc
Z20	-	SMFZ20V	Zener diode	20.0..22.4V, Izt=20mA, 1W	SMF	9d	2z	Kec
Z20	-	SODZ20A-SH	Zener diode	20V±5%, Izt=12.5mA, 1W	SOD-123FL	7d	1a	Lrc
Z20	-	ZS4747A	Zener diode	20V±5%, 12.5mA, Zzt=22Ω, 1W	SMA-1	10d	1a	Frm
Z200	-	SODZ200A-SH	Zener diode	200V±5%, Izt=1mA, 1W	SOD-123FL	7d	1a	Lrc
Z200A	-	SZA200A	Zener diode	200V±5%, Izt=1mA, 1W	DO-214AC	1d	1a	Lrc
Z20A	-	SZA20A	Zener diode	20V±5%, Izt=12.5mA, 1W	DO-214AC	1d	1a	Lrc
Z20V	-	CZRM5250B-HF	Zener diode	19.0..21.0V, Zzt=25Ω, Izt=6.2mA, 500mW	SOD-123F	7d	1a	Cmc
Z20V	-	MMSZ5250B	Zener diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z20V	-	MMSZ5250BSW	Zener diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 200mW	SOD-323FL	7d	1a	Tac
Z20V	-	MMSZ5250BW	Zener diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 500mW	SOD-123FL	7d	1a	Tac
Z20V	-	TCMMSZ5250B	Zener diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 500mW	SOD-123FL	7d	1a	Tac
Z22	-	BZA10C22	Zener diode	20.9..23.1V, Izt=11.5mA, Zzt=23Ω, 1W	SMA-F	10d	1a	Did
Z22	-	CZRA4748-G	Zener diode	22V±5%, Izt=11.5mA, Zzt=23Ω, 1W	DO-214AC	1d	1a	Cmc
Z22	-	DFLZ22	Zener diode	22V±5%, Izt=25mA, Zzt<15Ω, 1W	SOD-123FL	7d	1d	Mco
Z22	-	SMAZ22	Zener diode	22V±5%, 25mA, Zzt<15Ω, 1W	DO-214AC	1d	1a	Exc
Z22	-	SMFZ22V	Zener diode	22.0..24.5V, Izt=10mA, 1W	SMF	9d	2z	Kec
Z22	-	SODZ22A-SH	Zener diode	22V±5%, Izt=11.5mA, 1W	SOD-123FL	7d	1a	Lrc
Z22	-	ZS4748A	Zener diode	22V±5%, 11.5mA, Zzt=23Ω, 1W	SMA-1	10d	1a	Frm
Z22A	-	SZA22A	Zener diode	22V±5%, Izt=11.5mA, 1W	DO-214AC	1d	1a	Lrc
Z22V	-	CZRM5251B-HF	Zener diode	20.90..23.10V, Zzt=29Ω, Izt=5.6mA, 500mW	SOD-123F	7d	1a	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
Z22V	-	MMSZ5251B	Zener diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z22V	-	MMSZ5251BSW	Zener diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 200mW	SOD-323FL	7d	1a	Tac
Z22V	-	MMSZ5251BW	Zener diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 500mW	SOD-123FL	7d	1a	Tac
Z22V	-	TCMMSZ5251B	Zener diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 500mW	SOD-123FL	7d	1a	Tac
Z24	-	BZA10C24	Zener diode	22.8..25.2V, Izt=10.5mA, Zzt=25Ω, 1W	SMA-F	10d	1a	Did
Z24	-	BZD2C24P	Zener diode	24V±5%, Izt=25mA, 1W	DO-219AA	7d	2n	Fag
Z24	-	CZRA4749-G	Zener diode	24V±5%, Izt=10.5mA, Zzt=25Ω, 1W	DO-214AC	1d	1a	Cmc
Z24	-	DFLZ24	Zener diode	24V±5%, Izt=25mA, Zzt<15Ω, 1W	SOD-123FL	7d	1d	Mco
Z24	-	SMAZ24	Zener diode	24V±5%, 25mA, Zzt<15Ω, 1W	DO-214AC	1d	1a	Exc
Z24	-	SMFZ24V	Zener diode	24.0..27.6V, Izt=10mA, 1W	SMF	9d	2z	Kec
Z24	-	SODZ24A-SH	Zener diode	24V±5%, Izt=10.5mA, 1W	SOD-123FL	7d	1a	Lrc
Z24	-	ZS4749A	Zener diode	24V±5%, 10.5mA, Zzt=25Ω, 1W	SMA-1	10d	1a	Frm
Z24A	-	SZA24A	Zener diode	24V±5%, Izt=10.5mA, 1W	DO-214AC	1d	1a	Lrc
Z24V	-	CZRM5252B-HF	Zener diode	22.80..25.20V, Zzt=33Ω, Izt=5.2mA, 500mW	SOD-123F	7d	1a	Cmc
Z24V	-	MMSZ5252B	Zener diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z24V	-	MMSZ5252BSW	Zener diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 200mW	SOD-323FL	7d	1a	Tac
Z24V	-	MMSZ5252BW	Zener diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 500mW	SOD-123FL	7d	1a	Tac
Z24V	-	TCMMSZ5252B	Zener diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 500mW	SOD-123FL	7d	1a	Tac
Z25V	-	CZRM5253B-HF	Zener diode	23.75..26.25V, Zzt=35Ω, Izt=5.0mA, 500mW	SOD-123F	7d	1a	Cmc
Z25V	-	MMSZ5253B	Zener diode	25V±5%, Izt=5mA, Zzt=35Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z25V	-	MMSZ5253BSW	Zener diode	25V±5%, Izt=5mA, Zzt=35Ω, 200mW	SOD-323FL	7d	1a	Tac
Z25V	-	MMSZ5253BW	Zener diode	25V±5%, Izt=5mA, Zzt=35Ω, 500mW	SOD-123FL	7d	1a	Tac
Z25V	-	TCMMSZ5253B	Zener diode	25V±5%, Izt=5mA, Zzt=35Ω, 500mW	SOD-123FL	7d	1a	Tac
Z27	-	BZA10C27	Zener diode	25.65..28.35V, Izt=9.5mA, Zzt=35Ω, 1W	SMA-F	10d	1a	Did
Z27	-	BZD2C27P	Zener diode	27V±5%, Izt=25mA, 1W	DO-219AA	7d	2n	Fag
Z27	-	CZRA4750-G	Zener diode	27V±5%, Izt=9.5mA, Zzt=35Ω, 1W	DO-214AC	1d	1a	Cmc
Z27	-	DFLZ27	Zener diode	27V±5%, Izt=25mA, Zzt<15Ω, 1W	SOD-123FL	7d	1d	Mco
Z27	-	SMAZ27	Zener diode	27V±5%, 25mA, Zzt<15Ω, 1W	DO-214AC	1d	1a	Exc
Z27	-	SMFZ27V	Zener diode	27.0..30.8V, Izt=10mA, 1W	SMF	9d	2z	Kec
Z27	-	SODZ27A-SH	Zener diode	27V±5%, Izt=9.5mA, 1W	SOD-123FL	7d	1a	Lrc
Z27	-	ZS4750A	Zener diode	27V±5%, 9.5mA, Zzt=35Ω, 1W	SMA-1	10d	1a	Frm
Z27A	-	SZA27A	Zener diode	27V±5%, Izt=9.5mA, 1W	DO-214AC	1d	1a	Lrc
Z27V	-	CZRM5254B-HF	Zener diode	25.65..28.35V, Zzt=41Ω, Izt=4.6mA, 500mW	SOD-123F	7d	1a	Cmc
Z27V	-	MMSZ5254B	Zener diode	27V±5%, Izt=4.6mA, Zzt=41Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z27V	-	MMSZ5254BSW	Zener diode	27V±5%, Izt=4.6mA, Zzt=41Ω, 200mW	SOD-323FL	7d	1a	Tac
Z27V	-	MMSZ5254BW	Zener diode	27V±5%, Izt=4.6mA, Zzt=41Ω, 500mW	SOD-123FL	7d	1a	Tac
Z27V	-	TCMMSZ5254B	Zener diode	27V±5%, Izt=4.6mA, Zzt=41Ω, 500mW	SOD-123FL	7d	1a	Tac
Z28V	-	CZRM5255B-HF	Zener diode	26.60..29.40V, Zzt=44Ω, Izt=4.5mA, 500mW	SOD-123F	7d	1a	Cmc
Z28V	-	MMSZ5255B	Zener diode	29V±5%, Izt=4.5mA, Zzt=44Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z28V	-	MMSZ5255BSW	Zener diode	29V±5%, Izt=4.5mA, Zzt=44Ω, 200mW	SOD-323FL	7d	1a	Tac
Z28V	-	MMSZ5255BW	Zener diode	29V±5%, Izt=4.5mA, Zzt=44Ω, 500mW	SOD-123FL	7d	1a	Tac
Z28V	-	TCMMSZ5255B	Zener diode	28V±5%, Izt=4.5mA, Zzt=44Ω, 500mW	SOD-123FL	7d	1a	Tac
Z2V4	-	CZRM5221B-HF	Zener diode	2.28..2.52V, Zzt=30Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z2V4	-	MMSZ5221B	Zener diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z2V4	-	MMSZ5221BSW	Zener diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tac
Z2V4	-	MMSZ5221BW	Zener diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tac
Z2V4	-	TCMMSZ5221B	Zener diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tac
Z2V5	-	CZRM5222B-HF	Zener diode	2.38..2.63V, Zzt=30Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z2V5	-	MMSZ5222B	Zener diode	2.5V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z2V5	-	MMSZ5222BSW	Zener diode	2.5V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tac
Z2V5	-	MMSZ5222BW	Zener diode	2.5V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tac
Z2V5	-	TCMMSZ5222B	Zener diode	2.5V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tac
Z2V7	-	CZRM5223B-HF	Zener diode	2.57..2.84V, Zzt=30Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z2V7	-	MMSZ5223B	Zener diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z2V7	-	MMSZ5223BSW	Zener diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tac
Z2V7	-	MMSZ5223BW	Zener diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tac
Z2V7	-	TCMMSZ5223B	Zener diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tac
Z2V8	-	CZRM5224B-HF	Zener diode	2.66..2.94V, Zzt=30Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z2V8	-	MMSZ5224B	Zener diode	2.8V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z2V8	-	MMSZ5224BSW	Zener diode	2.8V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOD-323FL	7d	1a	Tac
Z2V8	-	MMSZ5224BW	Zener diode	2.8V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tac
Z2V8	-	TCMMSZ5224B	Zener diode	2.8V±5%, Izt=20mA, Zzt=30Ω, 500mW	SOD-123FL	7d	1a	Tac
Z3	-	BZF10C22	Zener diode	20.9..23.1V, Izt=11.5mA, Zzt=23Ω, 1W	SOD-123F	6d	1a	Did
Z3	-	BZT52C5V6T	Zener diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 100mW	SOD-523	6d	1a	Mco
Z3	-	BZT52C62-V-G	Zener diode	62V±5%, Izt=2.5mA, Zzt=150Ω, 500mW	SOD-123	5d	1k	Vs
Z3	-	BZX384C62-V-G	Zener diode	62V±5%, Izt=2mA, Zzt=80Ω, 200mW	SOD-323	5d	2m	Vs
Z3	-	CD0603-Z2V7	Zener diode	2.57..2.84V, 5mA, Zzt=83Ω, 150mW	0603	70d	2b	Brn
Z3	-	CD1005-Z2V7	Zener diode	2.57..2.84V, 5mA, Zzt=83Ω, 200mW	1005	70d	2b	Brn
Z3	-	CZRER52C2V7	Zener diode	2.57..2.84V, Izt=5mA, Zzt=83Ω, 150mW	SOD-723F	70d	2b	Cmc
Z3	-	CZRERT52C2V7	Zener diode	2.57..2.84V, Izt=5mA, Zzt=83Ω, 150mW	SOD-723F	70d	2b	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
Z3	-	CZRF52C2V7	Zener diode	2.57..2.84V, Izt=5mA, Zzt=83Ω, 200mW	1005	70d	2b	Cmc
Z3	-	CZRFR52C2V7	Zener diode	2.57..2.84V, Izt=5mA, Zzt=83Ω, 200mW	1005	70d	2b	Cmc
Z3	-	CZRQR52C2V7	Zener diode	2.57..2.84V, Izt=5mA, Zzt=83Ω, 125mW	0402	70d	2b	Cmc
Z3	-	CZRUR52C2V7	Zener diode	2.57..2.84V, Izt=5mA, Zzt=83Ω, 150mW	0603	70d	2b	Cmc
Z3	-	MFPZ4748A	Zener diode	20.9..23.1V, Izt=11.5mA, 1W	SOD-123F	7d	1a	Ttr
Z3	-	MM3Z3V3C	Zener diode	3.14..3.47V, Zzt=89Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
Z3	-	MM5Z5V6	Zener diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 200mW	SOD-523	6d	1a	Sec
Z3	-	MMSZ51T	Zener diode	51V±5%, Izt=5mA, Zzt=180Ω, 500mW	SOD-123	5d	1u	Mot
Z3	-	PDZ3.3B	Zener diode	3.3V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
Z3	-	TCMM3Z3V3C	Zener diode	3.3V±5%, Izt=5mA, Zzt=89Ω, 200mW	SOD-323FL	7d	1a	Tac
Z3	-	TSZL52C2V7	Zener diode	2.57..2.84V, Izt=5mA, Zzt=83Ω, 200mW	1005	70d	2d	Tsc
Z3	-	TSZU52C2V7	Zener diode	2.57..2.84V, Izt=5mA, Zzt=83Ω, 150mW	0603	70d	2d	Tsc
Z3	-	VGFM02-C22-M	TVS	Vrwm=18.8V, Vbr=20.9..23.1V, 6.55A, 200W(1ms)	SOD-123F	6d	1a	Frm
Z3	-	ZD5251BSG	Zener diode	22V±5%, 5mA, Zzt=55Ω, 500mW	SOD-323-S	7d	1a	Cys
Z3	-	ZGFM1022-MH	Zener diode	22V±10%, Zzt=23Ω(Izt=11.5mA), 1W	SOD-123H	10d	1a	Frm
Z3	-	ZGFM1022-N	Zener diode	20.9..23.1V, Izt=11.5mA, Zzt=23Ω, 1W	SOD-123F	6d	1a	Frm
Z30	-	BZA10C30	Zener diode	28.5..31.5V, Izt=8.5mA, Zzt=40Ω, 1W	SMA-F	10d	1a	Did
Z30	-	CZRA4751-G	Zener diode	30V±5%, Izt=8.5mA, Zzt=40Ω, 1W	DO-214AC	1d	1a	Cmc
Z30	-	DFLZ30	Zener diode	30V±5%, Izt=15mA, Zzt<22Ω, 1W	SOD-123FL	7d	1d	Mco
Z30	-	SMAZ30	Zener diode	30V±5%, 25mA, Zzt<15Ω, 1W	DO-214AC	1d	1a	Exc
Z30	-	SMFZ30V	Zener diode	30.0..34.0V, Izt=10mA, 1W	SMF	9d	2z	Kec
Z30	-	SODZ30A-SH	Zener diode	30V±5%, Izt=8.5mA, 1W	SOD-123FL	7d	1a	Lrc
Z30	-	ZS4751A	Zener diode	30V±5%, 8.5mA, Zzt=40Ω, 1W	SMA-1	10d	1a	Frm
Z30A	-	SZA30A	Zener diode	30V±5%, Izt=8.5mA, 1W	DO-214AC	1d	1a	Lrc
Z30V	-	CZRM5256B-HF	Zener diode	28.50..31.50V, Zzt=49Ω, Izt=4.2mA, 500mW	SOD-123F	7d	1a	Cmc
Z30V	-	MMSZ5256B	Zener diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z30V	-	MMSZ5256BSW	Zener diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 200mW	SOD-323FL	7d	1a	Tac
Z30V	-	MMSZ5256BW	Zener diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 500mW	SOD-123FL	7d	1a	Tac
Z30V	-	TCMMSZ5256B	Zener diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 500mW	SOD-123FL	7d	1a	Tac
Z33	-	BZA10C33	Zener diode	31.35..34.65V, Izt=7.5mA, Zzt=45Ω, 1W	SMA-F	10d	1a	Did
Z33	-	BZD2C33P	Zener diode	33V±5%, Izt=25mA, 1W	DO-219AA	7d	2n	Fag
Z33	-	CZRA4752-G	Zener diode	33V±5%, Izt=7.5mA, Zzt=45Ω, 1W	DO-214AC	1d	1a	Cmc
Z33	-	DFLZ33	Zener diode	33V±5%, Izt=15mA, Zzt<24Ω, 1W	SOD-123FL	7d	1d	Mco
Z33	-	SMAZ33	Zener diode	33V±5%, 25mA, Zzt<15Ω, 1W	DO-214AC	1d	1a	Exc
Z33	-	SMFZ33V	Zener diode	33.0..37.0V, Izt=10mA, 1W	SMF	9d	2z	Kec
Z33	-	SODZ33A-SH	Zener diode	33V±5%, Izt=7.5mA, 1W	SOD-123FL	7d	1a	Lrc
Z33	-	ZS4752A	Zener diode	33V±5%, 7.5mA, Zzt=45Ω, 1W	SMA-1	10d	1a	Frm
Z33A	-	SZA33A	Zener diode	33V±5%, Izt=7.5mA, 1W	DO-214AC	1d	1a	Lrc
Z33V	-	CZRM5257B-HF	Zener diode	31.35..34.65V, Zzt=58Ω, Izt=3.8mA, 500mW	SOD-123F	7d	1a	Cmc
Z33V	-	MMSZ5257B	Zener diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z33V	-	MMSZ5257BSW	Zener diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 200mW	SOD-323FL	7d	1a	Tac
Z33V	-	MMSZ5257BW	Zener diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 500mW	SOD-123FL	7d	1a	Tac
Z33V	-	TCMMSZ5257B	Zener diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 500mW	SOD-123FL	7d	1a	Tac
Z36	-	BZA10C36	Zener diode	34.2..37.8V, Izt=7mA, Zzt=50Ω, 1W	SMA-F	10d	1a	Did
Z36	-	BZD2C36P	Zener diode	36V±5%, Izt=10mA, 1W	DO-219AA	7d	2n	Fag
Z36	-	CZRA4753-G	Zener diode	36V±5%, Izt=7mA, Zzt=50Ω, 1W	DO-214AC	1d	1a	Cmc
Z36	-	DFLZ36	Zener diode	36V±5%, Izt=10mA, Zzt<40Ω, 1W	SOD-123FL	7d	1d	Mco
Z36	-	SMAZ36	Zener diode	36V±5%, 10mA, Zzt<40Ω, 1W	DO-214AC	1d	1a	Exc
Z36	-	SMFZ36V	Zener diode	36.0..40.0V, Izt=10mA, 1W	SMF	9d	2z	Kec
Z36	-	SODZ36A-SH	Zener diode	36V±5%, Izt=7mA, 1W	SOD-123FL	7d	1a	Lrc
Z36	-	ZS4753A	Zener diode	36V±5%, 7mA, Zzt=50Ω, 1W	SMA-1	10d	1a	Frm
Z36A	-	SZA36A	Zener diode	36V±5%, Izt=7mA, 1W	DO-214AC	1d	1a	Lrc
Z36V	-	CZRM5258B-HF	Zener diode	34.20..37.80V, Zzt=70Ω, Izt=3.4mA, 500mW	SOD-123F	7d	1a	Cmc
Z36V	-	MMSZ5258B	Zener diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z36V	-	MMSZ5258BSW	Zener diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 200mW	SOD-323FL	7d	1a	Tac
Z36V	-	MMSZ5258BW	Zener diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 500mW	SOD-123FL	7d	1a	Tac
Z36V	-	TCMMSZ5258B	Zener diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 500mW	SOD-123FL	7d	1a	Tac
Z39	-	BZA10C39	Zener diode	37.05..40.95V, Izt=76mA, Zzt=10Ω, 1W	SMA-F	10d	1a	Did
Z39	-	BZD2C39P	Zener diode	39V±5%, Izt=10mA, 1W	DO-219AA	7d	2n	Fag
Z39	-	CZRA4754-G	Zener diode	39V±5%, Izt=6.5mA, Zzt=60Ω, 1W	DO-214AC	1d	1a	Cmc
Z39	-	DFLZ39	Zener diode	39V±5%, Izt=10mA, Zzt<40Ω, 1W	SOD-123FL	7d	1d	Mco
Z39	-	SMAZ39	Zener diode	39V±5%, 10mA, Zzt<40Ω, 1W	DO-214AC	1d	1a	Exc
Z39	-	SODZ39A-SH	Zener diode	39V±5%, Izt=6.5mA, 1W	SOD-123FL	7d	1a	Lrc
Z39A	-	SZA39A	Zener diode	39V±5%, Izt=6.5mA, 1W	DO-214AC	1d	1a	Lrc
Z39V	-	CZRM5259B-HF	Zener diode	37.05..40.95V, Zzt=80Ω, Izt=3.2mA, 500mW	SOD-123F	7d	1a	Cmc
Z39V	-	MMSZ5259B	Zener diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z39V	-	MMSZ5259BSW	Zener diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 200mW	SOD-323FL	7d	1a	Tac
Z39V	-	MMSZ5259BW	Zener diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tac
Z39V	-	TCMMSZ5259B	Zener diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 500mW	SOD-123FL	7d	1a	Tac
Z3V0	-	CZRM5225B-HF	Zener diode	2.85..3.15V, Zzt=29Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
Z3V0	-	MMSZ5225B	Zener diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z3V0	-	MMSZ5225BSW	Zener diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 200mW	SOD-323FL	7d	1a	Tac
Z3V0	-	MMSZ5225BW	Zener diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 500mW	SOD-123FL	7d	1a	Tac
Z3V0	-	TCMMSZ5225B	Zener diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 500mW	SOD-123FL	7d	1a	Tac
Z3V3	-	BZA10C3V3	Zener diode	3.135..3.465 V, Izt=76mA, Zzt=10Ω, 1W	SMA-F	10d	1a	Did
Z3V3	-	CZRA4728-G	Zener diode	3.3V±5%, Izt=76mA, Zzt=10Ω, 1W	DO-214AC	1d	1a	Cmc
Z3V3	-	CZRM5226B-HF	Zener diode	3.14..3.47V, Zzt=28Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z3V3	-	MMSZ5226B	Zener diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z3V3	-	MMSZ5226BSW	Zener diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 200mW	SOD-323FL	7d	1a	Tac
Z3V3	-	MMSZ5226BW	Zener diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 500mW	SOD-123FL	7d	1a	Tac
Z3V3	-	TCMMSZ5226B	Zener diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 500mW	SOD-123FL	7d	1a	Tac
Z3V3	-	ZS4728A	Zener diode	3.3V±5%, 76mA, Zzt=10Ω, 1W	SMA-1	10d	1a	Frm
Z3V6	-	BZA10C3V6	Zener diode	3.42..3.78V, Izt=69mA, Zzt=10Ω, 1W	SMA-F	10d	1a	Did
Z3V6	-	CZRA4729-G	Zener diode	3.6V±5%, Izt=69mA, Zzt=10Ω, 1W	DO-214AC	1d	1a	Cmc
Z3V6	-	CZRM5227B-HF	Zener diode	3.42..3.78V, Zzt=24Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z3V6	-	MMSZ5227B	Zener diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z3V6	-	MMSZ5227BSW	Zener diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 200mW	SOD-323FL	7d	1a	Tac
Z3V6	-	MMSZ5227BW	Zener diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 500mW	SOD-123FL	7d	1a	Tac
Z3V6	-	TCMMSZ5227B	Zener diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 500mW	SOD-123FL	7d	1a	Tac
Z3V6	-	ZS4729A	Zener diode	3.6V±5%, 69mA, Zzt=10Ω, 1W	SMA-1	10d	1a	Frm
Z3V9	-	BZA10C3V9	Zener diode	3.705..4.095V, Izt=64mA, Zzt=9Ω, 1W	SMA-F	10d	1a	Did
Z3V9	-	CZRA4730-G	Zener diode	3.9V±5%, Izt=64mA, Zzt=9Ω, 1W	DO-214AC	1d	1a	Cmc
Z3V9	-	CZRM5228B-HF	Zener diode	3.71..4.10V, Zzt=23Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z3V9	-	MMSZ5228B	Zener diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z3V9	-	MMSZ5228BSW	Zener diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 200mW	SOD-323FL	7d	1a	Tac
Z3V9	-	MMSZ5228BW	Zener diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 500mW	SOD-123FL	7d	1a	Tac
Z3V9	-	TCMMSZ5228B	Zener diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 500mW	SOD-123FL	7d	1a	Tac
Z3V9	-	ZS4730A	Zener diode	3.9V±5%, 64mA, Zzt=9Ω, 1W	SMA-1	10d	1a	Frm
Z4	-	BZF10C24	Zener diode	22.8..25.2V, Izt=10.5mA, Zzt=25Ω, 1W	SOD-123F	6d	1a	Did
Z4	-	BZT52C68-V-G	Zener diode	68V±5%, Izt=2.5mA, Zzt=200Ω, 500mW	SOD-123	5d	1k	Vs
Z4	-	BZT52C6V2T	Zener diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 100mW	SOD-523	6d	1a	Mco
Z4	-	BZX384C68-V-G	Zener diode	68V±5%, Izt=2mA, Zzt=90Ω, 200mW	SOD-323	5d	2m	Vs
Z4	-	CD0603-Z3	Zener diode	2.85..3.15V, 5mA, Zzt=95Ω, 150mW	0603	70d	2b	Brn
Z4	-	CD1005-Z3	Zener diode	2.85..3.15V, 5mA, Zzt=95Ω, 200mW	1005	70d	2b	Brn
Z4	-	CZRER52C3	Zener diode	2.85..3.15V, Izt=5mA, Zzt=95Ω, 150mW	SOD-723F	70d	2b	Cmc
Z4	-	CZRERT52C3	Zener diode	2.85..3.15V, Izt=5mA, Zzt=95Ω, 150mW	SOD-723F	70d	2b	Cmc
Z4	-	CZRF52C3	Zener diode	2.85..3.15V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2b	Cmc
Z4	-	CZRFR52C3	Zener diode	2.85..3.15V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2b	Cmc
Z4	-	CZRQR52C3	Zener diode	2.85..3.15V, Izt=5mA, Zzt=95Ω, 125mW	0402	70d	2b	Cmc
Z4	-	CZRUR52C3	Zener diode	2.85..3.15V, Izt=5mA, Zzt=95Ω, 150mW	0603	70d	2b	Cmc
Z4	-	MFPZ4749A	Zener diode	22.8..25.2V, Izt=10.5mA, 1W	SOD-123F	7d	1a	Ttr
Z4	-	MM1Z5240B	Zener diode	9.50..10.50V, Izt=20mA, Zzt=17Ω, 500mW	SOD-323FL	7d	1a	Eic
Z4	-	MM1Z5240BH	Zener diode	9.5..10.5V, Izt=20mA, Zzt=17Ω, 500mW	SOD-123	5d	1a	Zow
Z4	-	MM3Z3V6C	Zener diode	3.42..3.78V, Zzt=84Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
Z4	-	MM5Z6V2	Zener diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 200mW	SOD-523	6d	1a	Sec
Z4	-	MMSZ5240B	Zener diode	10V±5%, Izt=20mA, Zzt=17Ω, 500mW	SOD-123	5d	1a	Eic
Z4	-	MMSZ56T	Zener diode	56V±5%, Izt=5mA, Zzt=200Ω, 500mW	SOD-123	5d	1u	Mot
Z4	-	PDZ3.6B	Zener diode	3.6V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
Z4	-	TCMM3Z3V6C	Zener diode	3.6V±5%, Izt=5mA, Zzt=84Ω, 200mW	SOD-323FL	7d	1a	Tac
Z4	-	TSZL52C3V0	Zener diode	2.85..3.15V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2d	Tsc
Z4	-	TSZU52C3V0	Zener diode	2.85..3.15V, Izt=5mA, Zzt=95Ω, 150mW	0603	70d	2d	Tsc
Z4	-	VGFM02-C24-M	TVS	Vrwm=20.5V, Vbr=22.8..25.2V, 6.0A, 200W(1ms)	SOD-123F	6d	1a	Frm
Z4	-	ZD5252BSG	Zener diode	24V±5%, 5mA, Zzt=62Ω, 500mW	SOD-323-S	7d	1a	Cys
Z4	-	ZGFM1024-MH	Zener diode	24V±10%, Zzt=25Ω(Izt=10.5mA), 1W	SOD-123H	10d	1a	Frm
Z4	-	ZGFM1024-N	Zener diode	22.8..25.2V, Izt=10.5mA, Zzt=25Ω, 1W	SOD-123F	6d	1a	Frm
Z43	-	BZA10C43	Zener diode	40.85..45.15V, Izt=69mA, Zzt=10Ω, 1W	SMA-F	10d	1a	Did
Z43	-	BZD2C43P	Zener diode	43V±5%, Izt=10mA, 1W	DO-219AA	7d	2n	Fag
Z43	-	CZRA4755-G	Zener diode	43V±5%, Izt=6mA, Zzt=70Ω, 1W	DO-214AC	1d	1a	Cmc
Z43	-	SODZ43A-SH	Zener diode	43V±5%, Izt=6mA, 1W	SOD-123FL	7d	1a	Lrc
Z43A	-	SZA43A	Zener diode	43V±5%, Izt=6mA, 1W	DO-214AC	1d	1a	Lrc
Z43V	-	CZRM5260B-HF	Zener diode	40.85..45.15V, Zzt=93Ω, Izt=3.0mA, 500mW	SOD-123F	7d	1a	Cmc
Z43V	-	MMSZ5260B	Zener diode	43V±5%, Izt= 3mA, Zzt=93Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z43V	-	MMSZ5260BSW	Zener diode	43V±5%, Izt= 3mA, Zzt=93Ω, 200mW	SOD-323FL	7d	1a	Tac
Z43V	-	MMSZ5260BW	Zener diode	43V±5%, Izt= 3mA, Zzt=93Ω, 500mW	SOD-123FL	7d	1a	Tac
Z43V	-	TCMMSZ5260B	Zener diode	43V±5%, Izt=3 93mA, Zzt=93Ω, 500mW	SOD-123FL	7d	1a	Tac
Z44	-	2CZ4004	Si-diode	Rectifier, 400V, 1A, Vf<1.1V(1A), <15pF	SOD-123	5d	1a	Jce
Z45	-	2CZ4005	Si-diode	Rectifier, 600V, 1A, Vf<1.1V(1A), <15pF	SOD-123	5d	1a	Jce
Z46	-	2CZ4006	Si-diode	Rectifier, 800V, 1A, Vf<1.1V(1A), <15pF	SOD-123	5d	1a	Jce
Z46	-	BAT46Z	Si-diode	SBD, 100V, 150mA, Vf<1V(250mA), 6pF	SOD-123	5d	1d	Ste
Z47	-	2CZ4007	Si-diode	Rectifier, 1000V, 1A, Vf<1.1V(1A), <15pF	SOD-123	5d	1a	Jce

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
Z47	-	BZD2C47P	Zener diode	47V±5%, Izt=10mA, 1W	DO-219AA	7d	2n	Fag
Z47	-	SODZ47A-SH	Zener diode	47V±5%, Izt=5.5mA, 1W	SOD-123FL	7d	1a	Lrc
Z47A	-	SZA47A	Zener diode	47V±5%, Izt=5.5mA, 1W	DO-214AC	1d	1a	Lrc
Z47V	-	CZRM5261B-HF	Zener diode	44.65..49.35V, Zzt=105Ω, Izt=2.7mA, 500mW	SOD-123F	7d	1a	Cmc
Z47V	-	MMSZ5261B	Zener diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z47V	-	MMSZ5261BSW	Zener diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 200mW	SOD-323FL	7d	1a	Tac
Z47V	-	MMSZ5261BW	Zener diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 500mW	SOD-123FL	7d	1a	Tac
Z47V	-	TCMMSZ5261B	Zener diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 500mW	SOD-123FL	7d	1a	Tac
Z4V3	-	BZA10C4V3	Zener diode	4.085..4.515V, Izt=58mA, Zzt=9Ω, 1W	SMA-F	10d	1a	Did
Z4V3	-	CZRA4731-G	Zener diode	4.3V±5%, Izt=58mA, Zzt=9Ω, 1W	DO-214AC	1d	1a	Cmc
Z4V3	-	CZRM5229B-HF	Zener diode	4.09..4.52V, Zzt=22Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z4V3	-	MMSZ5229B	Zener diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z4V3	-	MMSZ5229BSW	Zener diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOD-323FL	7d	1a	Tac
Z4V3	-	MMSZ5229BW	Zener diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 500mW	SOD-123FL	7d	1a	Tac
Z4V3	-	TCMMSZ5229B	Zener diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 500mW	SOD-123FL	7d	1a	Tac
Z4V3	-	ZS4731A	Zener diode	4.3V±5%, 58mA, Zzt=9Ω, 1W	SMA-1	10d	1a	Frm
Z4V7	-	BZA10C4V7	Zener diode	4.465..4.935V, Izt=53mA, Zzt=8Ω, 1W	SMA-F	10d	1a	Did
Z4V7	-	CZRA4732-G	Zener diode	4.7V±5%, Izt=53mA, Zzt=8Ω, 1W	DO-214AC	1d	1a	Cmc
Z4V7	-	CZRM5230B-HF	Zener diode	4.47..4.94V, Zzt=19Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z4V7	-	MMSZ5230B	Zener diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z4V7	-	MMSZ5230BSW	Zener diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 200mW	SOD-323FL	7d	1a	Tac
Z4V7	-	MMSZ5230BW	Zener diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 500mW	SOD-123FL	7d	1a	Tac
Z4V7	-	TCMMSZ5230B	Zener diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 500mW	SOD-123FL	7d	1a	Tac
Z4V7	-	ZS4732A	Zener diode	4.7V±5%, 53mA, Zzt=8Ω, 1W	SMA-1	10d	1a	Frm
Z5	-	BZF10C27	Zener diode	25.7..28.4V, Izt=9.5mA, Zzt=35Ω, 1W	SOD-123F	6d	1a	Did
Z5	-	BZT52C6V8T	Zener diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 100mW	SOD-523	6d	1a	Mco
Z5	-	BZT52C75-V-G	Zener diode	75V±5%, Izt=2.5mA, Zzt=250Ω, 500mW	SOD-123	5d	1k	Vs
Z5	-	BZX384C75-V-G	Zener diode	75V±5%, Izt=2mA, Zzt=95Ω, 200mW	SOD-323	5d	2m	Vs
Z5	-	BZX584B47V	Zener diode	46.06..47.94V, Izt=2mA, Zzt=170Ω, 200mW	SOD-523FL	7d	1a	Tac
Z5	-	CD0603-Z3V3	Zener diode	3.14..3.47V 5mA, Zzt=95Ω, 150mW	0603	70d	2b	Brn
Z5	-	CD1005-Z3V3	Zener diode	3.14..3.47V 5mA, Zzt=95Ω, 200mW	1005	70d	2b	Brn
Z5	-	CZRER52C3V3	Zener diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 150mW	SOD-723F	70d	2b	Cmc
Z5	-	CZRERT52C3V3	Zener diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 150mW	SOD-723F	70d	2b	Cmc
Z5	-	CZRF52C3V3	Zener diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2b	Cmc
Z5	-	CZRFR52C3V3	Zener diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2b	Cmc
Z5	-	CZRQR52C3V3	Zener diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 125mW	0402	70d	2b	Cmc
Z5	-	CZRUR52C3V3	Zener diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 150mW	0603	70d	2b	Cmc
Z5	-	MFPZ4750A	Zener diode	25.7..28.4V, Izt=9.5mA, 1W	SOD-123F	7d	1a	Ttr
Z5	-	MM1Z5261B	Zener diode	44.65..49.35V, Izt=2.7mA, Zzt=105Ω, 500mW	SOD-323FL	7d	1a	Eic
Z5	-	MM1Z5261BH	Zener diode	44.65..49.35V, Izt=2.7mA, Zzt=105Ω, 500mW	SOD-123	5d	1a	Zow
Z5	-	MM3Z3V9C	Zener diode	3.71..4.1V, Zzt=84Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
Z5	-	MM5Z47VB	Zener diode	46.06..47.94V, Izt=2mA, Zzt=170Ω, 200mW	SOD-523FL	7d	1a	Tac
Z5	-	MM5Z6V8	Zener diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Sec
Z5	-	MMSZ5261B	Zener diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 500mW	SOD-123	5d	1a	Eic
Z5	-	MMSZ62T	Zener diode	62V±5%, Izt=5mA, Zzt=215Ω, 500mW	SOD-123	5d	1u	Mot
Z5	-	PDZ3.9B	Zener diode	3.9V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
Z5	-	TCMM3Z3V9C	Zener diode	3.9V±5%, Izt=5mA, Zzt=84Ω, 200mW	SOD-323FL	7d	1a	Tac
Z5	-	TSZL52C3V3	Zener diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2d	Tsc
Z5	-	TSZU52C3V3	Zener diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 150mW	0603	70d	2d	Tsc
Z5	-	VGFM02-C27-M	TVS	Vrwm=23.1V, Vbr=25.7..28.4V, 5.35A, 200W(1ms)	SOD-123F	6d	1a	Frm
Z5	-	ZD5254BSG	Zener diode	27V±5%, 5mA, Zzt=70Ω, 500mW	SOD-323-S	7d	1a	Cys
Z5	-	ZGFM1027-MH	Zener diode	27V±10%, Zzt=35Ω(Izt=9.5mA), 1W	SOD-123H	10d	1a	Frm
Z5	-	ZGFM1027-N	Zener diode	25.7..28.4V, Izt=9.5mA, Zzt=35Ω, 1W	SOD-123F	6d	1a	Frm
Z51	-	SODZ51A-SH	Zener diode	51V±5%, Izt=5mA, 1W	SOD-123FL	7d	1a	Lrc
Z51A	-	SZA51A	Zener diode	51V±5%, Izt=5mA, 1W	DO-214AC	1d	1a	Lrc
Z51V	-	CZRM5262B-HF	Zener diode	48.45..53.55V, Zzt=125Ω, Izt=2.5mA, 500mW	SOD-123F	7d	1a	Cmc
Z51V	-	MMSZ5262B	Zener diode	51V±5%, Izt=2.5mA, Zzt=125Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z51V	-	MMSZ5262BSW	Zener diode	51V±5%, Izt=2.5mA, Zzt=125Ω, 200mW	SOD-323FL	7d	1a	Tac
Z51V	-	MMSZ5262BW	Zener diode	51V±5%, Izt=2.5mA, Zzt=125Ω, 500mW	SOD-123FL	7d	1a	Tac
Z51V	-	TCMMSZ5262B	Zener diode	51V±5%, Izt=2.5mA, Zzt=125Ω, 500mW	SOD-123FL	7d	1a	Tac
Z53	-	STPS0503Z	Si-diode	SBR, 30V, 500mA, Vf<0.33V(500mA)	SOD-123	5d	1a	Ste
Z54	-	STPS0540Z	Si-diode	SBR, 40V, 500mA, Vf<0.5V(500mA), 5ms	SOD-123	5d	1a	Ste
Z56	-	SODZ56A-SH	Zener diode	56V±5%, Izt=4.5mA, 1W	SOD-123FL	7d	1a	Lrc
Z56	-	STPS0560Z	Si-diode	SBR, 60V, 500mA, Vf<0.53V(500mA), 5ms	SOD-123	5d	1a	Ste
Z56A	-	SZA56A	Zener diode	56V±5%, Izt=4.5mA, 1W	DO-214AC	1d	1a	Lrc
Z56V	-	CZRM5263B-HF	Zener diode	53.20..58.80V, Zzt=150Ω, Izt=2.2mA, 500mW	SOD-123F	7d	1a	Cmc
Z56V	-	MMSZ5263B	Zener diode	56V±5%, Izt=2.2mA, Zzt=150Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z56V	-	MMSZ5263BSW	Zener diode	56V±5%, Izt=2.2mA, Zzt=150Ω, 200mW	SOD-323FL	7d	1a	Tac
Z56V	-	MMSZ5263BW	Zener diode	56V±5%, Izt=2.2mA, Zzt=150Ω, 500mW	SOD-123FL	7d	1a	Tac
Z56V	-	TCMMSZ5263B	Zener diode	56V±5%, Izt=2.2mA, Zzt=150Ω, 500mW	SOD-123FL	7d	1a	Tac

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
Z5V1	-	BZA10C5V1	Zener diode	4.845..5.355V, Izt=49mA, Zzt=7Ω, 1W	SMA-F	10d	1a	Did
Z5V1	-	CZRA4733-G	Zener diode	5.1V±5%, Izt=49mA, Zzt=7Ω, 1W	DO-214AC	1d	1a	Cmc
Z5V1	-	CZRM5231B-HF	Zener diode	4.85..5.36V, Zzt=17Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z5V1	-	MMSZ5231B	Zener diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z5V1	-	MMSZ5231BSW	Zener diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOD-323FL	7d	1a	Tac
Z5V1	-	MMSZ5231BW	Zener diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 500mW	SOD-123FL	7d	1a	Tac
Z5V1	-	SMAZ5V1	Zener diode	5.1V±5%, 100mA, Zzt<5Ω, 1W	DO-214AC	1d	1a	Exc
Z5V1	-	TCMMSZ5231B	Zener diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 500mW	SOD-123FL	7d	1a	Tac
Z5V1	-	ZS4733A	Zener diode	5.1V±5%, 49mA, Zzt=7Ω, 1W	SMA-1	10d	1a	Frm
Z5V6	-	BZA10C5V6	Zener diode	5.32..5.88V, Izt=45mA, Zzt=5Ω, 1W	SMA-F	10d	1a	Did
Z5V6	-	CZRA4734-G	Zener diode	5.6V±5%, Izt=45mA, Zzt=5Ω, 1W	DO-214AC	1d	1a	Cmc
Z5V6	-	CZRM5232B-HF	Zener diode	5.32..5.88V, Zzt=11Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z5V6	-	MMSZ5232B	Zener diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z5V6	-	MMSZ5232BSW	Zener diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 200mW	SOD-323FL	7d	1a	Tac
Z5V6	-	MMSZ5232BW	Zener diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 500mW	SOD-123FL	7d	1a	Tac
Z5V6	-	SMAZ5V6	Zener diode	5.6V±5%, 100mA, Zzt<2Ω, 1W	DO-214AC	1d	1a	Exc
Z5V6	-	TCMMSZ5232B	Zener diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 500mW	SOD-123FL	7d	1a	Tac
Z5V6	-	ZS4734A	Zener diode	5.6V±5%, 45mA, Zzt=5Ω, 1W	SMA-1	10d	1a	Frm
Z6	-	BZF10C30	Zener diode	28.5..31.5V, Izt=8.5mA, Zzt=40Ω, 1W	SOD-123F	6d	1a	Did
Z6	-	BZT52C7V5T	Zener diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 100mW	SOD-523	6d	1a	Mco
Z6	-	CD0603-Z3V6	Zener diode	3.42..3.78V, 5mA, Zzt=95Ω, 150mW	0603	70d	2b	Brn
Z6	-	CD1005-Z3V6	Zener diode	3.42..3.78V, 5mA, Zzt=95Ω, 200mW	1005	70d	2b	Brn
Z6	-	CZRER52C3V6	Zener diode	3.42..3.78V, Izt=5mA, Zzt=95Ω, 150mW	SOD-723F	70d	2b	Cmc
Z6	-	CZRERT52C3V6	Zener diode	3.42..3.78V, Izt=5mA, Zzt=95Ω, 150mW	SOD-723F	70d	2b	Cmc
Z6	-	CZRF52C3V6	Zener diode	3.42..3.78V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2b	Cmc
Z6	-	CZRFR52C3V6	Zener diode	3.42..3.78V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2b	Cmc
Z6	-	CZRQR52C3V6	Zener diode	3.42..3.78V, Izt=5mA, Zzt=95Ω, 125mW	0402	70d	2b	Cmc
Z6	-	CZRUR52C3V6	Zener diode	3.42..3.78V, Izt=5mA, Zzt=95Ω, 150mW	0603	70d	2b	Cmc
Z6	-	MFPZ4751A	Zener diode	28.5..31.5V, Izt=8.5mA, 1W	SOD-123F	7d	1a	Ttr
Z6	-	MM3Z4V3C	Zener diode	4.09..4.52V, Zzt=84Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
Z6	-	MM5Z7V5	Zener diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Sec
Z6	-	MMSZ68T	Zener diode	68V±5%, Izt=5mA, Zzt=240Ω, 500mW	SOD-123	5d	1u	Mot
Z6	-	PDZ4.3B	Zener diode	4.3V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
Z6	-	TCMM3Z4V3C	Zener diode	4.3V±5%, Izt=5mA, Zzt=84Ω, 200mW	SOD-323FL	7d	1a	Tac
Z6	-	TSZL52C3V6	Zener diode	3.42..3.78V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2d	Tsc
Z6	-	TSZU52C3V6	Zener diode	3.42..3.78V, Izt=5mA, Zzt=95Ω, 150mW	0603	70d	2d	Tsc
Z6	-	VGFM02-C30-M	TVS	Vrwm=25.6V, Vbr=28.59..31.5V, 4.85A, 200W(1ms)	SOD-123F	6d	1a	Frm
Z6	-	ZD5256BSG	Zener diode	30V±5%, 5mA, Zzt=78Ω, 500mW	SOD-323-S	7d	1a	Cys
Z6	-	ZGFM1030-MH	Zener diode	30V±10%, Zzt=40Ω(Izt=8.5mA), 1W	SOD-123H	10d	1a	Frm
Z6	-	ZGFM1030-N	Zener diode	28.5..31.5V, Izt=8.5mA, Zzt=40Ω, 1W	SOD-123F	6d	1a	Frm
Z6.8	-	SODZ6.8A-SH	Zener diode	6.8V±5%, Izt=37mA, 1W	SOD-123FL	7d	1a	Lrc
Z6.8A	-	SZA6.8A	Zener diode	6.8V±5%, Izt=37mA, 1W	DO-214AC	1d	1a	Lrc
Z60V	-	MMSZ5264BSW	Zener diode	60V±5%, Izt=2.1mA, Zzt=170Ω, 200mW	SOD-323FL	7d	1a	Tac
Z60V	-	MMSZ5264BW	Zener diode	60V±5%, Izt=2.1mA, Zzt=170Ω, 500mW	SOD-123FL	7d	1a	Tac
Z62	-	BZD2C62P	Zener diode	62V±5%, Izt=10mA, 1W	DO-219AA	7d	2n	Fag
Z62	-	SODZ62A-SH	Zener diode	62V±5%, Izt=4mA, 1W	SOD-123FL	7d	1a	Lrc
Z62A	-	SZA62A	Zener diode	62V±5%, Izt=4mA, 1W	DO-214AC	1d	1a	Lrc
Z62V	-	MMSZ5265BSW	Zener diode	62V±5%, Izt=2mA, Zzt=185Ω, 200mW	SOD-323FL	7d	1a	Tac
Z62V	-	MMSZ5265BW	Zener diode	62V±5%, Izt=2mA, Zzt=185Ω, 500mW	SOD-123FL	7d	1a	Tac
Z68	-	BZD2C68P	Zener diode	68V±5%, Izt=10mA, 1W	DO-219AA	7d	2n	Fag
Z68	-	SODZ68A-SH	Zener diode	68V±5%, Izt=3.7mA, 1W	SOD-123FL	7d	1a	Lrc
Z68A	-	SZA68A	Zener diode	68V±5%, Izt=3.7mA, 1W	DO-214AC	1d	1a	Lrc
Z68V	-	MMSZ5266BSW	Zener diode	64.60..71.40V, Izt=1.8mA, Zzt=230Ω, 200mW	SOD-323FL	7d	1a	Tac
Z68V	-	MMSZ5266BW	Zener diode	64.60..71.40V, Izt=1.8mA, Zzt=230Ω, 500mW	SOD-123FL	7d	1a	Tac
Z6V0	-	CZRM5233B-HF	Zener diode	5.70..6.30V, Zzt=7Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z6V0	-	MMSZ5233B	Zener diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z6V0	-	MMSZ5233BSW	Zener diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOD-323FL	7d	1a	Tac
Z6V0	-	MMSZ5233BW	Zener diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123FL	7d	1a	Tac
Z6V0	-	TCMMSZ5233B	Zener diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123FL	7d	1a	Tac
Z6V2	-	BZA10C6V2	Zener diode	5.89..6.51V, Izt=41mA, Zzt=2Ω, 1W	SMA-F	10d	1a	Did
Z6V2	-	CZRA4735-G	Zener diode	6.2V±5%, Izt=41mA, Zzt=2Ω, 1W	DO-214AC	1d	1a	Cmc
Z6V2	-	CZRM5234B-HF	Zener diode	5.89..6.51V, Zzt=7Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z6V2	-	MMSZ5234B	Zener diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z6V2	-	MMSZ5234BSW	Zener diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOD-323FL	7d	1a	Tac
Z6V2	-	MMSZ5234BW	Zener diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123FL	7d	1a	Tac
Z6V2	-	SMAZ6V2	Zener diode	6.2V±5%, 100mA, Zzt<2Ω, 1W	DO-214AC	1d	1a	Exc
Z6V2	-	TCMMSZ5234B	Zener diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 500mW	SOD-123FL	7d	1a	Tac
Z6V2	-	ZS4735A	Zener diode	6.2V±5%, 41mA, Zzt=2Ω, 1W	SMA-1	10d	1a	Frm
Z6V8	-	BZA10C6V8	Zener diode	6.46..7.14V, Izt=37mA, Zzt=3.5Ω, 1W	SMA-F	10d	1a	Did
Z6V8	-	CZRA4736-G	Zener diode	6.8V±5%, Izt=37mA, Zzt=3.5Ω, 1W	DO-214AC	1d	1a	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
Z6V8	-	CZRM5235B-HF	Zener diode	6.46..7.14V, Zzt=5Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z6V8	-	MMSZ5235B	Zener diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z6V8	-	MMSZ5235BSW	Zener diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 200mW	SOD-323FL	7d	1a	Tac
Z6V8	-	MMSZ5235BW	Zener diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 500mW	SOD-123FL	7d	1a	Tac
Z6V8	-	SMAZ6V8	Zener diode	6.8V±5%, 100mA, Zzt<2Ω, 1W	DO-214AC	1d	1a	Exc
Z6V8	-	TCMMSZ5235B	Zener diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 500mW	SOD-123FL	7d	1a	Tac
Z6V8	-	ZS4736A	Zener diode	6.8V±5%, 37mA, Zzt=3.5Ω, 1W	SMA-1	10d	1a	Frm
Z7	-	BZF10C33	Zener diode	31.4..34.7V, Izt=7.5mA, Zzt=45Ω, 1W	SOD-123F	6d	1a	Did
Z7	-	BZT52C2V4WT	Zener diode	2.28..2.52V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	6d	1a	Ttr
Z7	-	BZT52C8V2T	Zener diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 100mW	SOD-523	6d	1a	Mco
Z7	-	CD0603-Z3V9	Zener diode	3.71..4.10V, 5mA, Zzt=95Ω, 150mW	0603	70d	2b	Brn
Z7	-	CD1005-Z3V9	Zener diode	3.71..4.10V, 5mA, Zzt=95Ω, 200mW	1005	70d	2b	Brn
Z7	-	CZRER52C3V9	Zener diode	3.71..4.10V, Izt=5mA, Zzt=95Ω, 150mW	SOD-723F	70d	2b	Cmc
Z7	-	CZRERT52C3V9	Zener diode	3.71..4.10 V, Izt=5mA, Zzt=95Ω, 150mW	SOD-723F	70d	2b	Cmc
Z7	-	CZRF52C3V9	Zener diode	3.71..4.10V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2b	Cmc
Z7	-	CZRFR52C3V9	Zener diode	3.71..4.10V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2b	Cmc
Z7	-	CZRQR52C3V9	Zener diode	3.71..4.10V, Izt=5mA, Zzt=95Ω, 125mW	0402	70d	2b	Cmc
Z7	-	CZRUR52C3V9	Zener diode	3.71..4.10V, Izt=5mA, Zzt=95Ω, 150mW	0603	70d	2b	Cmc
Z7	-	MFPZ4752A	Zener diode	31.4..34.7V, Izt=7.5mA, 1W	SOD-123F	7d	1a	Ttr
Z7	-	MM3Z4V7C	Zener diode	4.47..4.94V, Zzt=75Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
Z7	-	MM5Z2V4	Zener diode	2.4V±5%, Izt=5mA, Zzt=70Ω, 200mW	SOD-523	6d	1a	Eic
Z7	-	MM5Z2V4H	Zener diode	2.2..2.6V, Izt=5mA, Zzt=100Ω, 200mW	SOD-523	6d	1a	Zow
Z7	-	MM5Z8V2	Zener diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Sec
Z7	-	MMSZ75T	Zener diode	75V±5%, Izt=5mA, Zzt=255Ω, 500mW	SOD-123	5d	1u	Mot
Z7	-	PDZ4.7B	Zener diode	4.7V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
Z7	-	PDZ4.7BF	Zener diode	4.55..4.75V, Zzt=90Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
Z7	-	TCMM3Z4V7C	Zener diode	4.7V±5%, Izt=5mA, Zzt=75Ω, 200mW	SOD-323FL	7d	1a	Tac
Z7	-	TSZL52C3V9	Zener diode	3.71..4.10V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2d	Tsc
Z7	-	TSZU52C3V9	Zener diode	3.71..4.10V, Izt=5mA, Zzt=95Ω, 150mW	0603	70d	2d	Tsc
Z7	-	TZDP4.7BWS	Zener diode	4.55..4.75V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
Z7	-	VGFM02-C33-M	TVS	Vrwm=28.2V, Vbr=31.4..34.7V, 4.40A, 200W(1ms)	SOD-123F	6d	1a	Frm
Z7	-	ZD5257BSG	Zener diode	33V±5%, 5mA, Zzt=88Ω, 500mW	SOD-323-S	7d	1a	Cys
Z7	-	ZGFM1033-MH	Zener diode	33V±10%, Zzt=45Ω(Izt=7.5mA), 1W	SOD-123H	10d	1a	Frm
Z7	-	ZGFM1033-N	Zener diode	31.4..34.7V, Izt=7.5mA, Zzt=45Ω, 1W	SOD-123F	6d	1a	Frm
Z7.5	-	SODZ7.5A-SH	Zener diode	7.5V±5%, Izt=34mA, 1W	SOD-123FL	7d	1a	Lrc
Z7.5A	-	SZA7.5A	Zener diode	7.5V±5%, Izt=34mA, 1W	DO-214AC	1d	1a	Lrc
Z70	-	BAS70Z	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOD-123	5d	1a	Ste
Z75	-	SODZ75A-SH	Zener diode	75V±5%, Izt=3.3mA, 1W	SOD-123FL	7d	1a	Lrc
Z75A	-	SZA75A	Zener diode	75V±5%, Izt=3.3mA, 1W	DO-214AC	1d	1a	Lrc
Z75V	-	MMSZ5267BSW	Zener diode	71.25..78.75V, Izt=1.7mA, Zzt=270Ω, 200mW	SOD-323FL	7d	1a	Tac
Z75V	-	MMSZ5267BW	Zener diode	71.25..78.75V, Izt=1.7mA, Zzt=270Ω, 500mW	SOD-123FL	7d	1a	Tac
Z7V5	-	BZA10C7V5	Zener diode	7.125..7.875V, Izt=34mA, Zzt=4Ω, 1W	SMA-F	10d	1a	Did
Z7V5	-	CZRA4737-G	Zener diode	7.5V±5%, Izt=34mA, Zzt=4Ω, 1W	DO-214AC	1d	1a	Cmc
Z7V5	-	CZRM5236B-HF	Zener diode	7.13..7.88V, Zzt=6Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z7V5	-	MMSZ5236B	Zener diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z7V5	-	MMSZ5236BSW	Zener diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 200mW	SOD-323FL	7d	1a	Tac
Z7V5	-	MMSZ5236BW	Zener diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 500mW	SOD-123FL	7d	1a	Tac
Z7V5	-	SMAZ7V5	Zener diode	7.5V±5%, 100mA, Zzt<2Ω, 1W	DO-214AC	1d	1a	Exc
Z7V5	-	TCMMSZ5236B	Zener diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 500mW	SOD-123FL	7d	1a	Tac
Z7V5	-	ZS4737A	Zener diode	7.5V±5%, 34mA, Zzt=4Ω, 1W	SMA-1	10d	1a	Frm
Z8	-	BZF10C36	Zener diode	34.2..37.8V, Izt=7.0mA, Zzt=50Ω, 1W	SOD-123F	6d	1a	Did
Z8	-	BZT52C30WT	Zener diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Ttr
Z8	-	BZT52C9V1T	Zener diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 100mW	SOD-523	6d	1a	Mco
Z8	-	CD0603-Z4V3	Zener diode	4.09..4.52V, 5mA, Zzt=95Ω, 150mW	0603	70d	2b	Brn
Z8	-	CD1005-Z4V3	Zener diode	4.09..4.52V, 5mA, Zzt=95Ω, 200mW	1005	70d	2b	Brn
Z8	-	CZRER52C4V3	Zener diode	4.09..4.52V, Izt=5mA, Zzt=95Ω, 150mW	SOD-723F	70d	2b	Cmc
Z8	-	CZRERT52C4V3	Zener diode	4.09..4.52V, Izt=5mA, Zzt=95Ω, 150mW	SOD-723F	70d	2b	Cmc
Z8	-	CZRF52C4V3	Zener diode	4.09..4.52V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2b	Cmc
Z8	-	CZRFR52C4V3	Zener diode	4.09..4.52V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2b	Cmc
Z8	-	CZRQR52C4V3	Zener diode	4.09..4.52V, Izt=5mA, Zzt=95Ω, 125mW	0402	70d	2b	Cmc
Z8	-	CZRUR52C4V3	Zener diode	4.09..4.52V, Izt=5mA, Zzt=95Ω, 150mW	0603	70d	2b	Cmc
Z8	-	MFPZ4753A	Zener diode	34.2..37.8V, Izt=7.0mA, 1W	SOD-123F	7d	1a	Ttr
Z8	-	MM3Z5V1C	Zener diode	4.85..5.36V, Zzt=56Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
Z8	-	MM5Z30H	Zener diode	28..32V, Izt=2mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Zow
Z8	-	MM5Z30V	Zener diode	30V±5%, Izt=2mA, Zzt=80Ω, 200mW	SOD-523	6d	1a	Eic
Z8	-	MM5Z9V1	Zener diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 200mW	SOD-523	6d	1a	Sec
Z8	-	PDZ5.1B	Zener diode	5.1V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
Z8	-	TCMM3Z5V1C	Zener diode	5.1V±5%, Izt=5mA, Zzt=56Ω, 200mW	SOD-323FL	7d	1a	Tac
Z8	-	TSZL52C4V3	Zener diode	4.09..4.52V, Izt=5mA, Zzt=95Ω, 200mW	1005	70d	2d	Tsc
Z8	-	TSZU52C4V3	Zener diode	4.09..4.52V, Izt=5mA, Zzt=95Ω, 150mW	0603	70d	2d	Tsc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
Z8	-	TZDP5.1BWS	Zener diode	4.96..5.20V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
Z8	-	VGFM02-C36-M	TVS	Vrwm=30.8V, Vbr=34.2..37.8V, 4.0A, 200W(1ms)	SOD-123F	6d	1a	Frm
Z8	-	ZD5258BSG	Zener diode	36V±5%, 5mA, Zzt=95Ω, 500mW	SOD-323-S	7d	1a	Cys
Z8	-	ZGFM1036-MH	Zener diode	36V±10%, Zzt=50Ω(Izt=7mA), 1W	SOD-123H	10d	1a	Frm
Z8	-	ZGFM1036-N	Zener diode	34.2..37.8V, Izt=7.0mA, Zzt=50Ω, 1W	SOD-123F	6d	1a	Frm
Z8.2	-	SODZ8.2A-SH	Zener diode	8.2V±5%, Izt=31mA, 1W	SOD-123FL	7d	1a	Lrc
Z8.2A	-	SZA8.2A	Zener diode	8.2V±5%, Izt=31mA, 1W	DO-214AC	1d	1a	Lrc
Z82	-	SODZ82A-SH	Zener diode	82V±5%, Izt=3mA, 1W	SOD-123FL	7d	1a	Lrc
Z82A	-	SZA82A	Zener diode	82V±5%, Izt=3mA, 1W	DO-214AC	1d	1a	Lrc
Z8V2	-	BZA10C8V2	Zener diode	7.79..8.61V, Izt=31mA, Zzt=4.5Ω, 1W	SMA-F	10d	1a	Did
Z8V2	-	CZRA4738-G	Zener diode	8.2V±5%, Izt=31mA, Zzt=4.5Ω, 1W	DO-214AC	1d	1a	Cmc
Z8V2	-	CZRM5237B-HF	Zener diode	7.79 ..8.61V, Zzt=8Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z8V2	-	MMSZ5237B	Zener diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z8V2	-	MMSZ5237BSW	Zener diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOD-323FL	7d	1a	Tac
Z8V2	-	MMSZ5237BW	Zener diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123FL	7d	1a	Tac
Z8V2	-	SMAZ8V2	Zener diode	8.2V±5%, 100mA, Zzt<2Ω, 1W	DO-214AC	1d	1a	Exc
Z8V2	-	TCMMSZ5237B	Zener diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123FL	7d	1a	Tac
Z8V2	-	ZS4738A	Zener diode	8.2V±5%, 31mA, Zzt=4.5Ω, 1W	SMA-1	10d	1a	Frm
Z8V7	-	CZRM5238B-HF	Zener diode	8.27..9.14V, Zzt=8Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z8V7	-	MMSZ5238B	Zener diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z8V7	-	MMSZ5238BSW	Zener diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOD-323FL	7d	1a	Tac
Z8V7	-	MMSZ5238BW	Zener diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123FL	7d	1a	Tac
Z8V7	-	TCMMSZ5238B	Zener diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 500mW	SOD-123FL	7d	1a	Tac
Z9	-	BAS316PT	Si-diode	Sw, 100V, 250mA, Vf<1.25V(150mA), 4ns	SOD-323	5d	1a	Chm
Z9	-	BZF10C39	Zener diode	37.1..41.0V, Izt=6.5mA, Zzt=60Ω, 1W	SOD-123F	6d	1a	Did
Z9	-	BZT52C10T	Zener diode	10V±5%, Izt=5mA, Zzt=20Ω, 100mW	SOD-523	6d	1a	Mco
Z9	-	CD0603-Z4V7	Zener diode	4.47..4.94V, 5mA, Zzt=78Ω, 150mW	0603	70d	2b	Brn
Z9	-	CD1005-Z4V7	Zener diode	4.47..4.94V, 5mA, Zzt=78Ω, 200mW	1005	70d	2b	Brn
Z9	-	CZRER52C4V7	Zener diode	4.47..4.94V, Izt=5mA, Zzt=78Ω, 150mW	SOD-723F	70d	2b	Cmc
Z9	-	CZRERT52C4V7	Zener diode	4.47..4.94V, Izt=5mA, Zzt=78Ω, 150mW	SOD-723F	70d	2b	Cmc
Z9	-	CZRF52C4V7	Zener diode	4.47..4.94V, Izt=5mA, Zzt=78Ω, 200mW	1005	70d	2b	Cmc
Z9	-	CZRFR52C4V7	Zener diode	4.47..4.94V, Izt=5mA, Zzt=78Ω, 200mW	1005	70d	2b	Cmc
Z9	-	CZRQR52C4V7	Zener diode	4.47..4.94V, Izt=5mA, Zzt=78Ω, 125mW	0402	70d	2b	Cmc
Z9	-	CZRUR52C4V7	Zener diode	4.47..4.94V, Izt=5mA, Zzt=78Ω, 150mW	0603	70d	2b	Cmc
Z9	-	MFPZ4754A	Zener diode	37.1..41.0V, Izt=6.5mA, 1W	SOD-123F	7d	1a	Ttr
Z9	-	MM3Z5V6C	Zener diode	5.32..5.88V, Zzt=37Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
Z9	-	MM5Z10V	Zener diode	10V±5%, Izt=5mA, Zzt=20Ω, 200mW	SOD-523	6d	1a	Sec
Z9	-	PDZ5.6B	Zener diode	5.6V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
Z9	-	PDZ5.6BF	Zener diode	5.50..5.71V, Zzt=50Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
Z9	-	TCMM3Z5V6C	Zener diode	5.6V±5%, Izt=5mA, Zzt=37Ω, 200mW	SOD-323FL	7d	1a	Tac
Z9	-	TSZL52C4V7	Zener diode	4.47..4.94V, Izt=5mA, Zzt=78Ω, 200mW	1005	70d	2d	Tsc
Z9	-	TSZU52C4V7	Zener diode	4.47..4.94V, Izt=5mA, Zzt=78Ω, 150mW	0603	70d	2d	Tsc
Z9	-	TZDP5.6BWS	Zener diode	5.50..5.71V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
Z9	-	VGFM02-C39-M	TVS	Vrwm=33.3V, Vbr=37.1..41.1V, 3.70A, 200W(1ms)	SOD-123F	6d	1a	Frm
Z9	-	ZD5259BSG	Zener diode	39V±5%, 5mA, Zzt=130Ω, 500mW	SOD-323-S	7d	1a	Cys
Z9	-	ZGFM1039-MH	Zener diode	39V±10%, Zzt=60Ω(Izt=6.5mA), 1W	SOD-123H	10d	1a	Frm
Z9	-	ZGFM1039-N	Zener diode	37.1..41.0V, Izt=6.5mA, Zzt=60Ω, 1W	SOD-123F	6d	1a	Frm
Z9.1	-	SODZ9.1A-SH	Zener diode	9.1V±5%, Izt=28mA, 1W	SOD-123FL	7d	1a	Lrc
Z9.1A	-	SZA9.1A	Zener diode	9.1V±5%, Izt=28mA, 1W	DO-214AC	1d	1a	Lrc
Z91	-	SODZ91A-SH	Zener diode	91V±5%, Izt=2.8mA, 1W	SOD-123FL	7d	1a	Lrc
Z91A	-	SZA91A	Zener diode	91V±5%, Izt=2.8mA, 1W	DO-214AC	1d	1a	Lrc
Z9V1	-	BZA10C9V1	Zener diode	8.645..9.555V, Izt=28mA, Zzt=5Ω, 1W	SMA-F	10d	1a	Did
Z9V1	-	CZRA4739-G	Zener diode	9.1V±5%, Izt=28mA, Zzt=5Ω, 1W	DO-214AC	1d	1a	Cmc
Z9V1	-	CZRM5239B-HF	Zener diode	8.65..9.56V, Zzt=10Ω, Izt=20mA, 500mW	SOD-123F	7d	1a	Cmc
Z9V1	-	MMSZ5239B	Zener diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 500mW	SOD-123FL	7d	1a	Tsc
Z9V1	-	MMSZ5239BSW	Zener diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 200mW	SOD-323FL	7d	1a	Tac
Z9V1	-	MMSZ5239BW	Zener diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 500mW	SOD-123FL	7d	1a	Tac
Z9V1	-	SMAZ9V1	Zener diode	9.1V±5%, 50mA, Zzt<4Ω, 1W	DO-214AC	1d	1a	Exc
Z9V1	-	TCMMSZ5239B	Zener diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 500mW	SOD-123FL	7d	1a	Tac
Z9V1	-	ZS4739A	Zener diode	9.1V±5%, 28mA, Zzt=5Ω, 1W	SMA-1	10d	1a	Frm
ZA	-	BZF10C43	Zener diode	40.9..45.2V, Izt=6.0mA, Zzt=70Ω, 1W	SOD-123F	6d	1a	Did
ZA	-	BZX284-C7V5	Zener diode	7.5V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZA	-	CD0603-Z5V1	Zener diode	4.85..5.36V, 5mA, Zzt=60Ω, 150mW	0603	70d	2b	Brn
ZA	-	CD1005-Z5V1	Zener diode	4.85..5.36V, 5mA, Zzt=60Ω, 200mW	1005	70d	2b	Brn
ZA	-	CESD12VD3	ESDP-diode	Vrwm=5.0V, Vbr=6.2..7.3V, Ipp=15A, 350W(1ms)	SOD-123	5d	1a	Jce
ZA	-	CZRER52C5V1	Zener diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 150mW	SOD-723F	70d	2b	Cmc
ZA	-	CZRERT52C5V1	Zener diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 150mW	SOD-723F	70d	2b	Cmc
ZA	-	CZRF52C5V1	Zener diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 200mW	1005	70d	2b	Cmc
ZA	-	CZRFR52C5V1	Zener diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 200mW	1005	70d	2b	Cmc
ZA	-	CZRQR52C5V1	Zener diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 125mW	0402	70d	2b	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
ZA	-	CZRUR52C5V1	Zener diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 150mW	0603	70d	2b	Cmc
ZA	-	KDZ2.0VV	Zener diode	1.85..2.15V, Izt=5mA, Zzt=100Ω, 100mW	VSC	7d	1a	Kec
ZA	-	MFPZ4755A	Zener diode	40.9..45.2V, Izt=6.0mA, 1W	SOD-123F	7d	1a	Ttr
ZA	-	MM3Z6V2C	Zener diode	5.89..6.51V, Zzt=9Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
ZA	-	PDZ6.2B	Zener diode	6.2V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZA	-	PDZ6.2BF	Zener diode	6.06..6.33V, Zzt=50Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
ZA	-	SD05	TVS	Vrwm=5V, Vbr=6.2..7.3V, Ipp=24A, 350W(1ms)	SOD-323	5d	1a	Di
ZA	-	SD05T1	TVS	Vrwm=5V, Vbr=6.2..7.3V, Ipp=24A, 350W(1ms)	SOD-323	5d	1u	Ons
ZA	-	SMZG3807A	Zener diode	56V±5%, 22mA, Zzt=86Ω, 1.5W	DO-215AA	5d	1k	Vs
ZA	-	SMZJ3807A	Zener diode	56V±5%, 22mA, Zzt=86Ω, 1.5W	DO-214AA	1d	1k	Vs
ZA	-	TCMM3Z6V2C	Zener diode	6.2V±5%, Izt=5mA, Zzt=9Ω, 200mW	SOD-323FL	7d	1a	Tac
ZA	-	TSZL52C5V1	Zener diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 200mW	1005	70d	2d	Tsc
ZA	-	TSZU52C5V1	Zener diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 150mW	0603	70d	2d	Tsc
ZA	-	TZDP6.2BWS	Zener diode	6.06..6.33V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZA	-	ZGFM1043-MH	Zener diode	43V±10%, Zzt=70Ω(Izt=6mA), 1W	SOD-123H	10d	1a	Frm
ZA	-	ZGFM1043-N	Zener diode	40.9..45.2V, Izt=6.0mA, Zzt=70Ω, 1W	SOD-123F	6d	1a	Frm
ZB	-	BZF10C47	Zener diode	44.7..49.4V, Izt=5.5mA, Zzt=80Ω, 1W	SOD-123F	6d	1a	Did
ZB	-	BZX284-C8V2	Zener diode	8.2V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZB	-	CD0603-Z5V6	Zener diode	5.32..5.88V, 5mA, Zzt=40Ω, 150mW	0603	70d	2b	Brn
ZB	-	CD1005-Z5V6	Zener diode	5.32..5.88V, 5mA, Zzt=40Ω, 200mW	1005	70d	2b	Brn
ZB	-	CZRER52C5V6	Zener diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 150mW	SOD-723F	70d	2b	Cmc
ZB	-	CZRERT52C5V6	Zener diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 150mW	SOD-723F	70d	2b	Cmc
ZB	-	CZRF52C5V6	Zener diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 200mW	1005	70d	2b	Cmc
ZB	-	CZRFR52C5V6	Zener diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 200mW	1005	70d	2b	Cmc
ZB	-	CZRQR52C5V6	Zener diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 125mW	0402	70d	2b	Cmc
ZB	-	CZRUR52C5V6	Zener diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 150mW	0603	70d	2b	Cmc
ZB	-	KDZ18B	Zener diode	18V±2.5%, 20mA, 1W	PMDU	7d	1s	Rhm
ZB	-	KDZ2.2VV	Zener diode	2.05..2.38V, Izt=5mA, Zzt=100Ω, 100mW	VSC	7d	1a	Kec
ZB	-	MFPZ4756A	Zener diode	44.7..49.4V, Izt=5.5mA, 1W	SOD-123F	7d	1a	Ttr
ZB	-	MM3Z6V8C	Zener diode	6.46..7.14V, Zzt=14Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
ZB	-	PDZ6.8B	Zener diode	6.8V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZB	-	PDZ6.8BF	Zener diode	6.65..6.93V, Zzt=40Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
ZB	-	SMZG3807B	Zener diode	56V±10%, 22mA, Zzt=86Ω, 1.5W	DO-215AA	5d	1k	Vs
ZB	-	SMZJ3807B	Zener diode	56V±10%, 22mA, Zzt=86Ω, 1.5W	DO-214AA	1d	1k	Vs
ZB	-	TCMM3Z6V8C	Zener diode	6.8V±5%, Izt=5mA, Zzt=14Ω, 200mW	SOD-323FL	7d	1a	Tac
ZB	-	TSZL52C5V6	Zener diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 200mW	1005	70d	2d	Tsc
ZB	-	TSZU52C5V6	Zener diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 150mW	0603	70d	2d	Tsc
ZB	-	TZDP6.8BWS	Zener diode	6.65..6.93V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZB	-	ZGFM1047-MH	Zener diode	47V±10%, Zzt=80Ω(Izt=5.5mA), 1W	SOD-123H	10d	1a	Frm
ZB	-	ZGFM1047-N	Zener diode	44.7..49.4V, Izt=5.5mA, Zzt=80Ω, 1W	SOD-123F	6d	1a	Frm
ZB10	-	U1ZB10	Zener diode	9..11V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZB11	-	U1ZB11	Zener diode	9.9..12.1V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZB12	-	U1ZB12	Zener diode	10.8..13.2V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZB13	-	U1ZB13	Zener diode	11.7..14.3V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZB15	-	U1ZB15	Zener diode	13.5..16.5V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZB16	-	U1ZB16	Zener diode	14.4..17.6V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZB18	-	U1ZB18	Zener diode	16.2..19.8V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZB20	-	U1ZB20	Zener diode	18..22V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZB22	-	U1ZB22	Zener diode	19.8..24.2V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZB24	-	U1ZB24	Zener diode	21.6..26.4V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZB27	-	U1ZB27	Zener diode	24.3..29.7V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZB30	-	U1ZB30	Zener diode	27..33V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZB33	-	U1ZB33	Zener diode	29.7..36.3V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZB36	-	U1ZB36	Zener diode	32.4..39.6V, Izt=9mA, 1W	DO-214AC	1d	2fa	Gal
ZB43	-	U1ZB43	Zener diode	38.7..47.3V, Izt=7mA, 1W	DO-214AC	1d	2fa	Gal
ZB47	-	U1ZB47	Zener diode	42.3..51.7V, Izt=6mA, 1W	DO-214AC	1d	2fa	Gal
ZB51	-	U1ZB51	Zener diode	45.9..56.1, Izt=6mA, 1W	DO-214AC	1d	2fa	Gal
ZB6.8	-	U1ZB6.8	Zener diode	6.2..7.4V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZB68	-	U1ZB68	Zener diode	61.2..74.8V, Izt=4mA, 1W	DO-214AC	1d	2fa	Gal
ZB7.5	-	U1ZB7.5	Zener diode	6.8..8.3V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZB75	-	U1ZB75	Zener diode	67.5..82.5V, Izt=4mA, 1W	DO-214AC	1d	2fa	Gal
ZB8.2	-	U1ZB8.2	Zener diode	7.4..9.1V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZB82	-	U1ZB82	Zener diode	73.8..90.2V, Izt=3mA, 1W	DO-214AC	1d	2fa	Gal
ZB9.1	-	U1ZB9.1	Zener diode	8.2..10.1V, Izt=10mA, 1W	DO-214AC	1d	2fa	Gal
ZC	-	BZF10C51	Zener diode	48.5..53.6V, Izt=5.0mA, Zzt=95Ω, 1W	SOD-123F	6d	1a	Did
ZC	-	BZX284-C9V1	Zener diode	9.1V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZC	-	CD0603-Z6V2	Zener diode	5.89..6.51V, 5mA, Zzt=10Ω, 150mW	0603	70d	2b	Brn
ZC	-	CD1005-Z6V2	Zener diode	5.89..6.51V, 5mA, Zzt=10Ω, 200mW	1005	70d	2b	Brn
ZC	-	CESD12VD3	ESDP-diode	Vrwm=12.0V, Vbr=13.3..15.75V, Ipp=12A, 350W(1ms)	SOD-123	5d	1a	Jce
ZC	-	CZRER52C6V2	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 150mW	SOD-723F	70d	2b	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
ZC	-	CZRERT52C6V2	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 150mW	SOD-723F	70d	2b	Cmc
ZC	-	CZRF52C6V2	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 200mW	1005	70d	2b	Cmc
ZC	-	CZRFR52C6V2	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 200mW	1005	70d	2b	Cmc
ZC	-	CZRQR52C6V2	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 125mW	0402	70d	2b	Cmc
ZC	-	CZRUR52C6V2	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 150mW	0603	70d	2b	Cmc
ZC	-	KDZ2.4VV	Zener diode	2.28..2.60V, Izt=5mA, Zzt=100Ω, 100mW	VSC	7d	1a	Kec
ZC	-	MFPZ4757A	Zener diode	48.5..53.6V, Izt=5.0mA, 1W	SOD-123F	7d	1a	Ttr
ZC	-	MM3Z7V5C	Zener diode	7.11..7.86V, Zzt=14Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
ZC	-	PDZ7.5B	Zener diode	7.5V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZC	-	PDZ7.5BF	Zener diode	7.28..7.60V, Zzt=10Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
ZC	-	SD12	TVS	Vrwm=12.0V, Vbr=13.3..19V, Ipp=15A, 300W(1ms)	SOD-323	5d	1a	Sec
ZC	-	SD12T1	TVS	Vrwm=12.0V, Vbr=13.3..19V, Ipp=15A, 350W(1ms)	SOD-323	5d	1u	Ons
ZC	-	SMZG3808A	Zener diode	62V±5%, 20mA, Zzt=100Ω, 1.5W	DO-215AA	5d	1k	Vs
ZC	-	SMZJ3808A	Zener diode	62V±5%, 20mA, Zzt=100Ω, 1.5W	DO-214AA	1d	1k	Vs
ZC	-	TCMM3Z7V5C	Zener diode	7.5V±5%, Izt=5mA, Zzt=14Ω, 200mW	SOD-323FL	7d	1a	Tac
ZC	-	TSZL52C6V2	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 200mW	1005	70d	2d	Tsc
ZC	-	TSZU52C6V2	Zener diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 150mW	0603	70d	2d	Tsc
ZC	-	TZDP7.5BWS	Zener diode	7.28..7.60V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZC	-	ZGFM1051-MH	Zener diode	51V±10%, Zzt=95Ω(Izt=5mA), 1W	SOD-123H	10d	1a	Frm
ZC	-	ZGFM1051-N	Zener diode	48.5..53.6V, Izt=5.0mA, Zzt=95Ω, 1W	SOD-123F	6d	1a	Frm
ZD	-	BZF10C56	Zener diode	53.2..58.8V, Izt=4.5mA, Zzt=110Ω, 1W	SOD-123F	6d	1a	Did
ZD	-	BZX284-C10	Zener diode	10V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZD	-	KDZ2.7VV	Zener diode	2.50..2.90V, Izt=5mA, Zzt=110,Ω, 100mW	VSC	7d	1a	Kec
ZD	-	MFPZ4758A	Zener diode	53.2..58.8V, Izt=4.5mA, 1W	SOD-123F	7d	1a	Ttr
ZD	-	MM3Z8V2C	Zener diode	7.79..8.61V, Zzt=14Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
ZD	-	P4SMAJ220C	TVS	Vrwm=220V, 1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
ZD	-	P4SMAJ54C	TVS	Vrwm=54V, 4.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZD	-	PDZ8.2B	Zener diode	8.2V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZD	-	PDZ8.2BF	Zener diode	8.02..8.36V, Zzt=10Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
ZD	-	SMAJ54C	TVS	Vrwm=54V, Vbr=60.0..73.3V, 4.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZD	-	SMZG3808B	Zener diode	62V±10%, 20mA, Zzt=100Ω, 1.5W	DO-215AA	5d	1k	Vs
ZD	-	SMZJ3808B	Zener diode	62V±10%, 20mA, Zzt=100Ω, 1.5W	DO-214AA	1d	1k	Vs
ZD	-	TCMM3Z8V2C	Zener diode	8.2V±5%, Izt=5mA, Zzt=14Ω, 200mW	SOD-323FL	7d	1a	Tac
ZD	-	TV04A540KB-G	TVS	Vrwm=54.0V, Vbr=60.0..73.30V, Ipp=4.15A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZD	-	TZDP8.2BWS	Zener diode	8.02..8.36V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZD	-	ZGFM1056-MH	Zener diode	56V±10%, Zzt=110Ω(Izt=4.5mA), 1W	SOD-123H	10d	1a	Frm
ZD	-	ZGFM1056-N	Zener diode	53.2..58.8V, Izt=4.5mA, Zzt=110Ω, 1W	SOD-123F	6d	1a	Frm
ZDD	-	SM5Z3V3A	Zener diode	3.3V±2%, Izt=380mA, 5W	SOD-6	1d	1q	Ste
ZDE	-	SM5Z3V6A	Zener diode	3.6V±2%, Izt=350mA, 5W	SOD-6	1d	1q	Ste
ZDF	-	SM5Z3V9A	Zener diode	3.9V±2%, Izt=320mA, 5W	SOD-6	1d	1q	Ste
ZDG	-	SM5Z4V3A	Zener diode	4.3V±2%, Izt=290mA, 5W	SOD-6	1d	1q	Ste
ZDH	-	SM5Z4V7A	Zener diode	4.7V±2%, Izt=280mA, 5W	SOD-6	1d	1q	Ste
ZDK	-	SM5Z5V1A	Zener diode	5.1V±2%, Izt=240mA, 5W	SOD-6	1d	1q	Ste
ZDL	-	SM5Z5V6A	Zener diode	5.6V±2%, Izt=220mA, 5W	SOD-6	1d	1q	Ste
ZDN	-	SM5Z6V2A	Zener diode	6.2V±2%, Izt=200mA, 5W	SOD-6	1d	1q	Ste
ZDP	-	SM5Z6V8A	Zener diode	6.8V±2%, Izt=175mA, 5W	SOD-6	1d	1q	Ste
ZDQ	-	SM5Z7V5A	Zener diode	7.5V±2%, Izt=175mA, 5W	SOD-6	1d	1q	Ste
ZDR	-	SM5Z8V2A	Zener diode	8.2V±2%, Izt=150mA, 5W	SOD-6	1d	1q	Ste
ZDT	-	SM5Z9V1A	Zener diode	9.2V±2%, Izt=150mA, 5W	SOD-6	1d	1q	Ste
ZDU	-	SM5Z10A	Zener diode	10V±2%, Izt=125mA, 5W	SOD-6	1d	1q	Ste
ZDW	-	SM5Z12A	Zener diode	12V±2%, Izt=100mA, 5W	SOD-6	1d	1q	Ste
ZDX	-	SM5Z13A	Zener diode	13V±2%, Izt=100mA, 5W	SOD-6	1d	1q	Ste
ZDY	-	SM5Z14A	Zener diode	14V±2%, Izt=100mA, 5W	SOD-6	1d	1q	Ste
ZDZ	-	SM5Z15A	Zener diode	15V±2%, Izt=75mA, 5W	SOD-6	1d	1q	Ste
ZE	-	BZF10C62	Zener diode	58.9..65.1V, Izt=4.0mA, Zzt=125Ω, 1W	SOD-123F	6d	1a	Did
ZE	-	BZX284-C11	Zener diode	11V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZE	-	CD0603-Z6V8	Zener diode	6.46..7.14V, 5mA, Zzt=8Ω, 150mW	0603	70d	2b	Brn
ZE	-	CD1005-Z6V8	Zener diode	6.46..7.14V, 5mA, Zzt=8Ω, 200mW	1005	70d	2b	Brn
ZE	-	CZRER52C6V8	Zener diode	6.46..7.14V, Izt=5mA, Zzt=8Ω, 150mW	SOD-723F	70d	2b	Cmc
ZE	-	CZRERT52C6V8	Zener diode	6.46..7.14V, Izt=5mA, Zzt=8Ω, 150mW	SOD-723F	70d	2b	Cmc
ZE	-	CZRF52C6V8	Zener diode	6.46..7.14V, Izt=5mA, Zzt=8Ω, 200mW	1005	70d	2b	Cmc
ZE	-	CZRFR52C6V8	Zener diode	6.46..7.14V, Izt=5mA, Zzt=8Ω, 200mW	1005	70d	2b	Cmc
ZE	-	CZRQR52C6V8	Zener diode	6.46..7.14V, Izt=5mA, Zzt=8Ω, 125mW	0402	70d	2b	Cmc
ZE	-	CZRUR52C6V8	Zener diode	6.46..7.14V, Izt=5mA, Zzt=8Ω, 150mW	0603	70d	2b	Cmc
ZE	-	KDZ3.0VV	Zener diode	2.80..3.20V, Izt=5mA, Zzt=120Ω, 100mW	VSC	7d	1a	Kec
ZE	-	MFPZ4759A	Zener diode	58.9..65.1V, Izt=4.0mA, 1W	SOD-123F	7d	1a	Ttr
ZE	-	MM3Z9V1C	Zener diode	8.65..9.56V, Zzt=14Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
ZE	-	P4SMAJ220CA	TVS	Vrwm=220V, 1.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Pjt
ZE	-	P4SMAJ54CA	TVS	Vrwm=54V, 4.6A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZE	-	PDZ9.1B	Zener diode	9.1V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
ZE	-	PDZ9.1BF	Zener diode	8.85..9.23V, Zzt=10Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
ZE	-	PMF54CA	TVS	Vbr=60.0..66.3V, Vrwm=54V, Ipp=2.30A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
ZE	-	SMAJ54CA	TVS	Vrwm=54V, Vbr=60.0..66.3V, 4.6A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZE	-	SMZG3809A	Zener diode	68V±5%, 18mA, Zzt=120Ω, 1.5W	DO-215AA	5d	1k	Vs
ZE	-	SMZJ3809A	Zener diode	68V±5%, 18mA, Zzt=120Ω, 1.5W	DO-214AA	1d	1k	Vs
ZE	-	TCMM3Z9V1C	Zener diode	9.1V±5%, Izt=5mA, Zzt=14Ω, 200mW	SOD-323FL	7d	1a	Tac
ZE	-	TSZL52C6V8	Zener diode	6.46..7.14V, Izt=5mA, Zzt=8Ω, 200mW	1005	70d	2d	Tsc
ZE	-	TSZU52C6V8	Zener diode	6.46..7.14V, Izt=5mA, Zzt=8Ω, 150mW	0603	70d	2d	Tsc
ZE	-	TV04A540JB-G	TVS	Vrwm=54.0V, Vbr=60.0..66.30V, Ipp=4.59A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZE	-	TVSS3.3VESPT	TVS	Vbr=5V, Vrwm=3.3V, 11.2A, 150W(1ms)	SC-79	7d	1a	Chm
ZE	-	TZDP9.1BWS	Zener diode	8.85..9.23V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZE	-	ZGFM1062-MH	Zener diode	62V±10%, Zzt=125Ω(Izt=4mA), 1W	SOD-123H	10d	1a	Frm
ZE	-	ZGFM1062-N	Zener diode	58.9..65.1V, Izt=4.0mA, Zzt=125Ω, 1W	SOD-123F	6d	1a	Frm
ZED	-	SM5Z16A	Zener diode	16V±2%, Izt=75mA, 5W	SOD-6	1d	1q	Ste
ZEF	-	SM5Z18A	Zener diode	18V±2%, Izt=65mA, 5W	SOD-6	1d	1q	Ste
ZEH	-	SM5Z20A	Zener diode	20V±2%, Izt=65mA, 5W	SOD-6	1d	1q	Ste
ZEK	-	SM5Z22A	Zener diode	22V±2%, Izt=50mA, 5W	SOD-6	1d	1q	Ste
ZEL	-	SM5Z24A	Zener diode	24V±2%, Izt=50mA, 5W	SOD-6	1d	1q	Ste
ZEN	-	SM5Z27A	Zener diode	27V±2%, Izt=50mA, 5W	SOD-6	1d	1q	Ste
ZEQ	-	SM5Z30A	Zener diode	30V±2%, Izt=40mA, 5W	SOD-6	1d	1q	Ste
ZER	-	SM5Z33A	Zener diode	33V±2%, Izt=40mA, 5W	SOD-6	1d	1q	Ste
ZET	-	SM5Z39A	Zener diode	39V±2%, Izt=30mA, 5W	SOD-6	1d	1q	Ste
ZEV	-	SM5Z47A	Zener diode	47V±2%, Izt=25mA, 5W	SOD-6	1d	1q	Ste
ZF	-	BZF10C68	Zener diode	64.6..71.4V, Izt=3.7mA, Zzt=150Ω, 1W	SOD-123F	6d	1a	Did
ZF	-	BZX284-C12	Zener diode	12V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZF	-	CD0603-Z7V5	Zener diode	7.13..7.88V, 5mA, Zzt=7Ω, 150mW	0603	70d	2b	Brn
ZF	-	CD1005-Z7V5	Zener diode	7.13..7.88V, 5mA, Zzt=7Ω, 200mW	1005	70d	2b	Brn
ZF	-	CZRER52C7V5	Zener diode	7.13..7.88V, Izt=5mA, Zzt=7Ω, 150mW	SOD-723F	70d	2b	Cmc
ZF	-	CZRERT52C7V5	Zener diode	7.13..7.88V, Izt=5mA, Zzt=7Ω, 150mW	SOD-723F	70d	2b	Cmc
ZF	-	CZRF52C7V5	Zener diode	7.13..7.88V, Izt=5mA, Zzt=7Ω, 200mW	1005	70d	2b	Cmc
ZF	-	CZRFR52C7V5	Zener diode	7.13..7.88V, Izt=5mA, Zzt=7Ω, 200mW	1005	70d	2b	Cmc
ZF	-	CZRQR52C7V5	Zener diode	7.13..7.88V, Izt=5mA, Zzt=7Ω, 125mW	0402	70d	2b	Cmc
ZF	-	CZRUR52C7V5	Zener diode	7.13..7.88V, Izt=5mA, Zzt=7Ω, 150mW	0603	70d	2b	Cmc
ZF	-	KDZ3.3VV	Zener diode	3.10..3.50V, Izt=5mA, Zzt=130Ω, 100mW	VSC	7d	1a	Kec
ZF	-	MAZD360	Zener diode	34..38V, Zzt=250Ω(5mA), 120mW	SSSMini2	7d	1a	Pan
ZF	-	MFPZ4760A	Zener diode	64.6..71.4V, Izt=3.7mA, 1W	SOD-123F	7d	1a	Ttr
ZF	-	MM3Z10VC	Zener diode	9.5..10.5V, Zzt=18Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
ZF	-	P4SMAJ58C	TVS	Vrwm=58V, 3.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZF	-	PDZ10B	Zener diode	10V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZF	-	PDZ10BF	Zener diode	9.77..10.21V, Zzt=10Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
ZF	-	SMAJ58C	TVS	Vrwm=58V, Vbr=64.4..78.7V, 3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZF	-	SMZG3809B	Zener diode	68V±10%, 18mA, Zzt=120Ω, 1.5W	DO-215AA	5d	1k	Vs
ZF	-	SMZJ3809B	Zener diode	68V±10%, 18mA, Zzt=120Ω, 1.5W	DO-214AA	1d	1k	Vs
ZF	-	TCMM3Z10VC	Zener diode	10V±5%, Izt=5mA, Zzt=18Ω, 200mW	SOD-323FL	7d	1a	Tac
ZF	-	TPSMA6.8A	TVS	Vrwm=6.8V, Ipp=38.1A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZF	-	TSZL52C7V5	Zener diode	7.13..7.88V, Izt=5mA, Zzt=7Ω, 200mW	1005	70d	2d	Tsc
ZF	-	TSZU52C7V5	Zener diode	7.13..7.88V, Izt=5mA, Zzt=7Ω, 150mW	0603	70d	2d	Tsc
ZF	-	TV04A580KB-G	TVS	Vrwm=58.0V, Vbr=64.40..78.70V, Ipp=3.88A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZF	-	TZDP10BWS	Zener diode	9.77..10.21V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZF	-	ZGFM1068-MH	Zener diode	68V±10%, Zzt=150Ω(Izt=3.7mA), 1W	SOD-123H	10d	1a	Frm
ZF	-	ZGFM1068-N	Zener diode	64.6..71.4V, Izt=3.7mA, Zzt=150Ω, 1W	SOD-123F	6d	1a	Frm
ZFD	-	SM5Z62A	Zener diode	62V±2%, Izt=20mA, 5W	SOD-6	1d	1q	Ste
ZFG	-	SM5Z82A	Zener diode	82V±2%, Izt=15mA, 5W	SOD-6	1d	1q	Ste
ZFK	-	SM5Z91A	Zener diode	91V±2%, Izt=15mA, 5W	SOD-6	1d	1q	Ste
ZFL	-	SM5Z100A	Zener diode	100V±2%, Izt=12mA, 5W	SOD-6	1d	1q	Ste
ZFM	-	SM5Z110A	Zener diode	110V±2%, Izt=12mA, 5W	SOD-6	1d	1q	Ste
ZFR	-	SM5Z150A	Zener diode	150V±2%, Izt=8mA, 5W	SOD-6	1d	1q	Ste
ZFU	-	SM5Z180A	Zener diode	180V±2%, Izt=5mA, 5W	SOD-6	1d	1q	Ste
ZFW	-	SM5Z200A	Zener diode	200V±2%, Izt=5mA, 5W	SOD-6	1d	1q	Ste
ZG	-	BZF10C75	Zener diode	71.3..78.8V, Izt=3.3mA, Zzt=175Ω, 1W	SOD-123F	6d	1a	Did
ZG	-	BZX284-C13	Zener diode	13V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZG	-	CD0603-Z8V2	Zener diode	7.79..8.61V, 5mA, Zzt=7Ω, 150mW	0603	70d	2b	Brn
ZG	-	CD1005-Z8V2	Zener diode	7.79..8.61V, 5mA, Zzt=7Ω, 200mW	1005	70d	2b	Brn
ZG	-	CZRER52C8V2	Zener diode	7.79..8.61V, Izt=5mA, Zzt=7Ω, 150mW	SOD-723F	70d	2b	Cmc
ZG	-	CZRERT52C8V2	Zener diode	7.79..8.61V, Izt=5mA, Zzt=7Ω, 150mW	SOD-723F	70d	2b	Cmc
ZG	-	CZRF52C8V2	Zener diode	7.79..8.61V, Izt=5mA, Zzt=7Ω, 200mW	1005	70d	2b	Cmc
ZG	-	CZRFR52C8V2	Zener diode	7.79..8.61V, Izt=5mA, Zzt=7Ω, 200mW	1005	70d	2b	Cmc
ZG	-	CZRQR52C8V2	Zener diode	7.79..8.61V, Izt=5mA, Zzt=7Ω, 125mW	0402	70d	2b	Cmc
ZG	-	CZRUR52C8V2	Zener diode	7.79..8.61V, Izt=5mA, Zzt=7Ω, 150mW	0603	70d	2b	Cmc
ZG	-	KDZ3.6VV	Zener diode	3.40..3.80V, Izt=5mA, Zzt=130Ω, 100mW	VSC	7d	1a	Kec

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
ZG	-	MFPZ4761A	Zener diode	71.3..78.8V, Izt=3.3mA, 1W	SOD-123F	7d	1a	Ttr
ZG	-	MM3Z11VC	Zener diode	10.45..11.55V, Zzt=18Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
ZG	-	P4SMAJ58CA	TVS	Vrwm=58V, 4.3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZG	-	PDZ11B	Zener diode	11V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZG	-	PDZ11BF	Zener diode	10.78..11.22V, Zzt=10Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
ZG	-	PMF58CA	TVS	Vbr=64.4..71.2V, Vrwm=58V, Ipp=2.14A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
ZG	-	SMAJ58CA	TVS	Vrwm=58V, Vbr=64.4..71.2V, 4.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZG	-	TCMM3Z11VC	Zener diode	11V±5%, Izt=5mA, Zzt=18Ω, 200mW	SOD-323FL	7d	1a	Tac
ZG	-	TPSMA7.5A	TVS	Vrwm=7.5V, Ipp=35.4A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZG	-	TSZL52C8V2	Zener diode	7.79..8.61V, Izt=5mA, Zzt=7Ω, 200mW	1005	70d	2d	Tsc
ZG	-	TSZU52C8V2	Zener diode	7.79..8.61V, Izt=5mA, Zzt=7Ω, 150mW	0603	70d	2d	Tsc
ZG	-	TV04A580JB-G	TVS	Vrwm=58.0V, Vbr=64.40..71.20V, Ipp=4.27A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZG	-	TZD3.6WU	Zener diode	3.60..3.845V, Izt=5mA, Zzt=100Ω, 100mW	SOD-723	7d	1a	Ttr
ZG	-	TZDP11BWS	Zener diode	10.78..11.22V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZG	-	ZGFM1075-MH	Zener diode	75V±10%, Zzt=175Ω(Izt=3.3mA), 1W	SOD-123H	10d	1a	Frm
ZG	-	ZGFM1075-N	Zener diode	71.3..78.8V, Izt=3.3mA, Zzt=175Ω, 1W	SOD-123F	6d	1a	Frm
ZH	-	BZF10C82	Zener diode	77.9..86.1V, Izt=3.0mA, Zzt=200Ω, 1W	SOD-123F	6d	1a	Did
ZH	-	BZX284-C15	Zener diode	15V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZH	-	CD0603-Z9V1	Zener diode	8.65..9.56V, 5mA, Zzt=10Ω, 150mW	0603	70d	2b	Brn
ZH	-	CD1005-Z9V1	Zener diode	8.65..9.56V, 5mA, Zzt=10Ω, 200mW	1005	70d	2b	Brn
ZH	-	CZRER52C9V1	Zener diode	8.65..9.56V, Izt=5mA, Zzt=10Ω, 150mW	SOD-723F	70d	2b	Cmc
ZH	-	CZRERT52C9V1	Zener diode	8.65..9.56V, Izt=5mA, Zzt=10Ω, 150mW	SOD-723F	70d	2b	Cmc
ZH	-	CZRF52C9V1	Zener diode	8.65..9.56V, Izt=5mA, Zzt=10Ω, 200mW	1005	70d	2b	Cmc
ZH	-	CZRFR52C9V1	Zener diode	8.65..9.56V, Izt=5mA, Zzt=10Ω, 200mW	1005	70d	2b	Cmc
ZH	-	CZRQR52C9V1	Zener diode	8.65..9.56V, Izt=5mA, Zzt=10Ω, 125mW	0402	70d	2b	Cmc
ZH	-	CZRUR52C9V1	Zener diode	8.65..9.56V, Izt=5mA, Zzt=10Ω, 150mW	0603	70d	2b	Cmc
ZH	-	KDZ3.9VV	Zener diode	3.70..4.10V, Izt=5mA, Zzt=130Ω, 100mW	VSC	7d	1a	Kec
ZH	-	MFPZ4762A	Zener diode	77.9..86.1V, Izt=3.0mA, 1W	SOD-123F	7d	1a	Ttr
ZH	-	MM3Z12VC	Zener diode	11.4..12.6V, Zzt=23Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
ZH	-	P4SMAJ60C	TVS	Vrwm=60V, 3.7A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZH	-	PDZ12B	Zener diode	12V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZH	-	PDZ12BF	Zener diode	11.74..12.24V, Zzt=10Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
ZH	-	SMAJ60C	TVS	Vrwm=60V, Vbr=66.7..81.5V, 3.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZH	-	TCMM3Z12VC	Zener diode	12V±5%, Izt=5mA, Zzt=23Ω, 200mW	SOD-323FL	7d	1a	Tac
ZH	-	TPSMA8.2A	TVS	Vrwm=8.2V, Ipp=33.1A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZH	-	TSZL52C9V1	Zener diode	8.65..9.56V, Izt=5mA, Zzt=10Ω, 200mW	1005	70d	2d	Tsc
ZH	-	TSZU52C9V1	Zener diode	8.65..9.56V, Izt=5mA, Zzt=10Ω, 150mW	0603	70d	2d	Tsc
ZH	-	TV04A600KB-G	TVS	Vrwm=60.0V, Vbr=66.70..81.50V, Ipp=3.74A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZH	-	TZD3.9WU	Zener diode	3.89..4.16V, Izt=5mA, Zzt=100Ω, 100mW	SOD-723	7d	1a	Ttr
ZH	-	TZDP12BWS	Zener diode	11.74..12.24V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZH	-	ZGFM1082-MH	Zener diode	82V±10%, Zzt=200Ω(Izt=3mA), 1W	SOD-123H	10d	1a	Frm
ZH	-	ZGFM1082-N	Zener diode	77.9..86.1V, Izt=3.0mA, Zzt=200Ω, 1W	SOD-123F	6d	1a	Frm
ZHK	-	SM2Z5V1	Zener diode	5.1V±2%, Izt=100mA, 2W	DO-214AB	1d	1q	Ste
ZHK	-	SMAZ5V1	Zener diode	4.8..5.4V, 196mA, Zzt=5Ω, 1W	DO-214AC	1d	1m	Di
ZHL	-	SM2Z5V6	Zener diode	5.6V±2%, Izt=100mA, 2W	DO-214AB	1d	1q	Ste
ZHL	-	SMAZ5V6	Zener diode	5.2..6V, 179mA, Zzt=2Ω, 1W	DO-214AC	1d	1m	Di
ZHN	-	SMAZ6V2	Zener diode	5.8..6.6V, 161mA, Zzt=2Ω, 1W	DO-214AC	1d	1m	Di
ZHO	-	SMAZ6V8	Zener diode	6.4..7.21V, 147mA, Zzt=2Ω, 1W	DO-214AC	1d	1m	Di
ZHQ	-	SMAZ7V5	Zener diode	7..7.9V, 133mA, Zzt=2Ω, 1W	DO-214AC	1d	1m	Di
ZHR	-	SMAZ8V2	Zener diode	7.7..8.7V, 122mA, Zzt=2Ω, 1W	DO-214AC	1d	1m	Di
ZHT	-	SMAZ9V1	Zener diode	8.5..9.6V, 110mA, Zzt=4Ω, 1W	DO-214AC	1d	1m	Di
ZHU	-	SMAZ10	Zener diode	9.4..10.6V, 100mA, Zzt=4Ω, 1W	DO-214AC	1d	1m	Di
ZHW	-	SM2Z12	Zener diode	12V±2%, Izt=50mA, 2W	DO-214AB	1d	1q	Ste
ZHW	-	SMAZ12	Zener diode	11.4..12.7V, 83mA, Zzt=7Ω, 1W	DO-214AC	1d	1m	Di
ZHZ	-	SM2Z15	Zener diode	15V±2%, Izt=50mA, 2W	DO-214AB	1d	1q	Ste
ZHZ	-	SMAZ15	Zener diode	13.8..15.6V, 67mA, Zzt=10Ω, 1W	DO-214AC	1d	1m	Di
ZI	-	BZX284-C16	Zener diode	16V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZI	-	TPSMA9.1A	TVS	Vrwm=9.1V, Ipp=29.9A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZJ	-	BZF10C91	Zener diode	86.5..95.6V, Izt=2.8mA, Zzt=250Ω, 1W	SOD-123F	6d	1a	Did
ZJ	-	BZX284-C18	Zener diode	18V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZJ	-	CD0603-Z10	Zener diode	9.5..10.5V, 5mA, Zzt=15Ω, 150mW	0603	70d	2b	Brn
ZJ	-	CD1005-Z10	Zener diode	9.5..10.5V, 5mA, Zzt=15Ω, 200mW	1005	70d	2b	Brn
ZJ	-	CZRER52C10	Zener diode	9.50..10.50V, Izt=5mA, Zzt=15Ω, 150mW	SOD-723F	70d	2b	Cmc
ZJ	-	CZRERT52C10	Zener diode	9.50..10.50V, Izt=5mA, Zzt=15Ω, 150mW	SOD-723F	70d	2b	Cmc
ZJ	-	CZRF52C10	Zener diode	9.50..10.50V, Izt=5mA, Zzt=15Ω, 200mW	1005	70d	2b	Cmc
ZJ	-	CZRFR52C10	Zener diode	9.50..10.50V, Izt=5mA, Zzt=15Ω, 200mW	1005	70d	2b	Cmc
ZJ	-	CZRQR52C10	Zener diode	9.50..10.50V, Izt=5mA, Zzt=15Ω, 125mW	0402	70d	2b	Cmc
ZJ	-	CZRUR52C10	Zener diode	9.50..10.50V, Izt=5mA, Zzt=15Ω, 150mW	0603	70d	2b	Cmc
ZJ	-	DDZ19	Zener diode	19V±10%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
ZJ	-	KDZ4.3VV	Zener diode	4.0..4.50V, Izt=5mA, Zzt=130Ω, 100mW	VSC	7d	1a	Kec

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
ZJ	-	MFPZ4763A	Zener diode	86.5..95.6V, Izt=2.8mA, 1W	SOD-123F	7d	1a	Ttr
ZJ	-	MM3Z13VC	Zener diode	12.35..13.65V, Zzt=28Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
ZJ	-	PDZ13B	Zener diode	13V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZJ	-	PDZ13BF	Zener diode	12.91..13.49V, Zzt=10Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
ZJ	-	TCMM3Z13VC	Zener diode	13V±5%, Izt=5mA, Zzt=28Ω, 200mW	SOD-323FL	7d	1a	Tac
ZJ	-	TPSMA10A	TVS	Vrwm=10V, Ipp=27.6A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZJ	-	TSCU52C10	Zener diode	9.50..10.50V, Izt=5mA, Zzt=15Ω, 200mW	1005	70d	2d	Tsc
ZJ	-	TSZU52C10	Zener diode	9.50..10.50V, Izt=5mA, Zzt=15Ω, 150mW	0603	70d	2d	Tsc
ZJ	-	TZD4.3WU	Zener diode	4.17..4.43V, Izt=5mA, Zzt=100Ω, 100mW	SOD-723	7d	1a	Ttr
ZJ	-	TZDP13BWS	Zener diode	12.91..13.49V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZJ	-	ZGFM1091-MH	Zener diode	91V±10%, Zzt=250Ω(Izt=2.8mA), 1W	SOD-123H	10d	1a	Frm
ZJ	-	ZGFM1091-N	Zener diode	86.5..95.6V, Izt=2.8mA, Zzt=250Ω, 1W	SOD-123F	6d	1a	Frm
ZJA	-	SMAZ16	Zener diode	15.3..17.1V, 63mA, Zzt=15Ω, 1W	DO-214AC	1d	1m	Di
ZJF	-	SM2Z18	Zener diode	18V±2%, Izt=25mA, 2W	DO-214AB	1d	1q	Ste
ZJF	-	SMAZ18	Zener diode	16.8..19.1V, 56mA, Zzt=15Ω, 1W	DO-214AC	1d	1m	Di
ZJG	-	SMAZ20	Zener diode	18.8..21.2V, 50mA, Zzt=15Ω, 1W	DO-214AC	1d	1m	Di
ZJK	-	SMAZ22	Zener diode	20.8..23.3V, 45mA, Zzt=15Ω, 1W	DO-214AC	1d	1m	Di
ZJL	-	SM2Z24	Zener diode	24V±2%, Izt=25mA, 2W	DO-214AB	1d	1q	Ste
ZJL	-	SMAZ24	Zener diode	22.8..25.6V, 42mA, Zzt=15Ω, 1W	DO-214AC	1d	1m	Di
ZJN	-	SM2Z27	Zener diode	27V±2%, Izt=25mA, 2W	DO-214AB	1d	1q	Ste
ZJN	-	SMAZ27	Zener diode	25.1..28.9V, 37mA, Zzt=15Ω, 1W	DO-214AC	1d	1m	Di
ZJQ	-	SM2Z30	Zener diode	30V±2%, Izt=25mA, 2W	DO-214AB	1d	1q	Ste
ZJQ	-	SMAZ30	Zener diode	28..32V, 33mA, Zzt=15Ω, 1W	DO-214AC	1d	1m	Di
ZJR	-	SMAZ33	Zener diode	31..35V, 30mA, Zzt=15Ω, 1W	DO-214AC	1d	1m	Di
ZJS	-	SM2Z36	Zener diode	36V±2%, Izt=10mA, 2W	DO-214AB	1d	1q	Ste
ZJS	-	SMAZ36	Zener diode	34..38V, 28mA, Zzt=40Ω, 1W	DO-214AC	1d	1m	Di
ZJT	-	SMAZ39	Zener diode	37..41V, 26mA, Zzt=40Ω, 1W	DO-214AC	1d	1m	Di
ZJV	-	SM2Z47	Zener diode	47V±2%, Izt=10mA, 2W	DO-214AB	1d	1q	Ste
ZK	-	BZF10C100	Zener diode	95.0..105.0V, Izt=2.5mA, Zzt=350Ω, 1W	SOD-123F	6d	1a	Did
ZK	-	BZX284-C20	Zener diode	20V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZK	-	CD0603-Z11	Zener diode	10.45..11.55V, 5mA, Zzt=20Ω, 150mW	0603	70d	2b	Brn
ZK	-	CD1005-Z11	Zener diode	10.45..11.55V, 5mA, Zzt=20Ω, 200mW	1005	70d	2b	Brn
ZK	-	CZRER52C11	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 150mW	SOD-723F	70d	2b	Cmc
ZK	-	CZRERT52C11	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 150mW	SOD-723F	70d	2b	Cmc
ZK	-	CZRF52C11	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 200mW	1005	70d	2b	Cmc
ZK	-	CZRFR52C11	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 200mW	1005	70d	2b	Cmc
ZK	-	CZRQR52C11	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 125mW	0402	70d	2b	Cmc
ZK	-	CZRUR52C11	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 150mW	0603	70d	2b	Cmc
ZK	-	DDZ21	Zener diode	21V±10%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
ZK	-	KDZ4.7VV	Zener diode	4.40..4.90V, Izt=5mA, Zzt=120Ω, 100mW	VSC	7d	1a	Kec
ZK	-	MFPZ4764A	Zener diode	95.0..105.0V, Izt=2.5mA, 1W	SOD-123F	7d	1a	Ttr
ZK	-	MM3Z15VC	Zener diode	14.25..15.75V, Zzt=28Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
ZK	-	P4SMAJ60CA	TVS	Vrwm=60V, 4.1A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZK	-	PDZ15B	Zener diode	15V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZK	-	PDZ15BF	Zener diode	14.34..14.98V, Zzt=15Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
ZK	-	PMF60CA	TVS	Vbr=66.7..73.7V, Vrwm=60V, Ipp=2.07A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
ZK	-	SD12CT1	TVS	Vrwm=12.0V, Vbr=13.3..19V, Ipp=15A, 350W(1ms), Bidir.	SOD-323	5ba	1u	Ons
ZK	-	SMAJ60CA	TVS	Vrwm=60V, Vbr=66.7..73.7V, 4.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZK	-	TCMM3Z15VC	Zener diode	15V±5%, Izt=5mA, Zzt=28Ω, 200mW	SOD-323FL	7d	1a	Tac
ZK	-	TPSMA11A	TVS	Vrwm=11V, Ipp=25.6A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZK	-	TSZL52C11	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 200mW	1005	70d	2d	Tsc
ZK	-	TSZU52C11	Zener diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 150mW	0603	70d	2d	Tsc
ZK	-	TV04A600JB-G	TVS	Vrwm=60.0V, Vbr=66.70..73.70V, Ipp=4.13A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZK	-	TZD4.7WU	Zener diode	4.55..4.75V, Izt=5mA, Zzt=100Ω, 100mW	SOD-723	7d	1a	Ttr
ZK	-	TZDP15BWS	Zener diode	14.34..14.98V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZK	-	ZGFM10100-MH	Zener diode	100V±10%, Zzt=350Ω(Izt=2.5mA), 1W	SOD-123H	10d	1a	Frm
ZK	-	ZGFM10100-N	Zener diode	95.0..105.0V, Izt=2.5mA, Zzt=35Ω, 1W	SOD-123F	6d	1a	Frm
ZKR	-	SM2Z150	Zener diode	150V±2%, Izt=5mA, 2W	DO-214AB	1d	1q	Ste
ZKW	-	SM2Z200	Zener diode	200V±2%, Izt=5mA, 2W	DO-214AB	1d	1q	Ste
ZL	-	BZX284-C22	Zener diode	22V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZL	-	DDZ23	Zener diode	23V±10%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
ZL	-	KDZ5.1VV	Zener diode	4.80..5.40V, Izt=5mA, Zzt=70Ω, 100mW	VSC	7d	1a	Kec
ZL	-	MM3Z16VC	Zener diode	15.2..16.8V, Zzt=37Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
ZL	-	P4SMAJ64C	TVS	Vrwm=64V, 3.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZL	-	PDZ16B	Zener diode	16V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZL	-	PDZ16BF	Zener diode	15.85..16.51V, Zzt=20Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
ZL	-	SMAJ64C	TVS	Vrwm=64V, Vbr=71.1..86.4V, 3.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZL	-	TCMM3Z16VC	Zener diode	16V±5%, Izt=5mA, Zzt=37Ω, 200mW	SOD-323FL	7d	1a	Tac
ZL	-	TPSMA12A	TVS	Vrwm=12V, Ipp=24.0A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZL	-	TV04A640KB-G	TVS	Vrwm=64.0V, Vbr=71.10..86.90V, Ipp=3.51A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
ZL	-	TZD5.1WU	Zener diode	4.98..5.20V, Izt=5mA, Zzt=80Ω, 100mW	SOD-723	7d	1a	Ttr
ZL	-	TZDP16BWS	Zener diode	15.85..16.51V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZM	-	BZX284-C24	Zener diode	24V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZM	-	CD0603-Z12	Zener diode	11.4..12.6V, 5mA, Zzt=20Ω, 150mW	0603	70d	2b	Brn
ZM	-	CD1005-Z12	Zener diode	11.4..12.6V, 5mA, Zzt=20Ω, 200mW	1005	70d	2b	Brn
ZM	-	CZRER52C12	Zener diode	11.40..12.60V, Izt=5mA, Zzt=20Ω, 150mW	SOD-723F	70d	2b	Cmc
ZM	-	CZRERT52C12	Zener diode	11.40..12.60V, Izt=5mA, Zzt=20Ω, 150mW	SOD-723F	70d	2b	Cmc
ZM	-	CZRF52C12	Zener diode	11.40..12.60V, Izt=5mA, Zzt=20Ω, 200mW	1005	70d	2b	Cmc
ZM	-	CZRFR52C12	Zener diode	11.40..12.60V, Izt=5mA, Zzt=20Ω, 200mW	1005	70d	2b	Cmc
ZM	-	CZRQR52C12	Zener diode	11.40..12.60V, Izt=5mA, Zzt=20Ω, 125mW	0402	70d	2b	Cmc
ZM	-	CZRUR52C12	Zener diode	11.40..12.60V, Izt=5mA, Zzt=20Ω, 150mW	0603	70d	2b	Cmc
ZM	-	DDZ26	Zener diode	26V±10%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
ZM	-	KDZ5.6VV	Zener diode	5.30..6.0V, Izt=5mA, Zzt=40Ω, 100mW	VSC	7d	1a	Kec
ZM	-	MM3Z18VC	Zener diode	17.1..18.9V, Zzt=42Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
ZM	-	P4SMAJ64CA	TVS	Vrwm=64V, 3.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZM	-	PDZ18B	Zener diode	18V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZM	-	PDZ18BF	Zener diode	17.56..18.35V, Zzt=20Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
ZM	-	PMF64CA	TVS	Vbr=71.1..78.6V, Vrwm=64V, Ipp=1.94A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
ZM	-	SMAJ64CA	TVS	Vrwm=64V, Vbr=71.1..78.6V, 3.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZM	-	TCMM3Z18VC	Zener diode	18V±5%, Izt=5mA, Zzt=42Ω, 200mW	SOD-323FL	7d	1a	Tac
ZM	-	TPSMA13A	TVS	Vrwm=13V, Ipp=22A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZM	-	TSZL52C12	Zener diode	11.40..12.60V, Izt=5mA, Zzt=20Ω, 200mW	1005	70d	2d	Tsc
ZM	-	TSZU52C12	Zener diode	11.40..12.60V, Izt=5mA, Zzt=20Ω, 150mW	0603	70d	2d	Tsc
ZM	-	TV04A640JB-G	TVS	Vrwm=64.0V, Vbr=71.10..78.60V, Ipp=3.88A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZM	-	TZD5.6WU	Zener diode	5.49..5.73V, Izt=5mA, Zzt=60Ω, 100mW	SOD-723	7d	1a	Ttr
ZM	-	TZDP18BWS	Zener diode	17.56..18.35V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZN	-	BZX284-C27	Zener diode	27V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZN	-	CD0603-Z13	Zener diode	12.35..13.65V, 5mA, Zzt=25Ω, 150mW	0603	70d	2b	Brn
ZN	-	CD1005-Z13	Zener diode	12.35..13.65V, 5mA, Zzt=25Ω, 200mW	1005	70d	2b	Brn
ZN	-	CZRER52C13	Zener diode	12.35..13.65V, Izt=5mA, Zzt=25Ω, 150mW	SOD-723F	70d	2b	Cmc
ZN	-	CZRERT52C13	Zener diode	12.35..13.65V, Izt=5mA, Zzt=25Ω, 150mW	SOD-723F	70d	2b	Cmc
ZN	-	CZRF52C13	Zener diode	12.35..13.65V, Izt=5mA, Zzt=25Ω, 200mW	1005	70d	2b	Cmc
ZN	-	CZRFR52C13	Zener diode	12.35..13.65V, Izt=5mA, Zzt=25Ω, 200mW	1005	70d	2b	Cmc
ZN	-	CZRQR52C13	Zener diode	12.35..13.65V, Izt=5mA, Zzt=25Ω, 125mW	0402	70d	2b	Cmc
ZN	-	CZRUR52C13	Zener diode	12.35..13.65V, Izt=5mA, Zzt=25Ω, 150mW	0603	70d	2b	Cmc
ZN	-	DDZ28	Zener diode	28V±10%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
ZN	-	KDZ6.2VV	Zener diode	5.80..6.60V, Izt=5mA, Zzt=30Ω, 100mW	VSC	7d	1a	Kec
ZN	-	MM3Z20VC	Zener diode	19..21V, Zzt=51Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
ZN	-	P4SMAJ70C	TVS	Vrwm=70V, 3.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZN	-	PDZ20B	Zener diode	20V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZN	-	PDZ20BF	Zener diode	19.52..20.39V, Zzt=20Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
ZN	-	SMAJ70C	TVS	Vrwm=70V, Vbr=77.8..95.1V, 3.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZN	-	TCMM3Z20VC	Zener diode	20V±5%, Izt=5mA, Zzt=51Ω, 200mW	SOD-323FL	7d	1a	Tac
ZN	-	TPSMA15A	TVS	Vrwm=15V, Ipp=18.9A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZN	-	TSZL52C13	Zener diode	12.35..13.65V, Izt=5mA, Zzt=25Ω, 200mW	1005	70d	2d	Tsc
ZN	-	TSZU52C13	Zener diode	12.35..13.65V, Izt=5mA, Zzt=25Ω, 150mW	0603	70d	2d	Tsc
ZN	-	TV04A700KB-G	TVS	Vrwm=70.0V, Vbr=77.80..95.10V, Ipp=3.20A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZN	-	TZD6.2WU	Zener diode	6.06..6.33V, Izt=5mA, Zzt=60Ω, 100mW	SOD-723	7d	1a	Ttr
ZN	-	TZDP20BWS	Zener diode	19.52..20.39V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZO	-	BZX284-C30	Zener diode	30V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZO	-	DDZ31	Zener diode	31V±10%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
ZO	-	TPSMA16A	TVS	Vrwm=16V, Ipp=17.8A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZP	-	BZX284-C33	Zener diode	33V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZP	-	CD0603-Z15	Zener diode	14.25..15.75V, 5mA, Zzt=30Ω, 150mW	0603	70d	2b	Brn
ZP	-	CD1005-Z15	Zener diode	14.25..15.75V, 5mA, Zzt=30Ω, 200mW	1005	70d	2b	Brn
ZP	-	CMDZ16L	Zener diode	15.20..16.80V, Izt=0.5mA, Zzt=80Ω, 250mW	SOD-323	5d	1a	Cen
ZP	-	CZRER52C15	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 150mW	SOD-723F	70d	2b	Cmc
ZP	-	CZRERT52C15	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 150mW	SOD-723F	70d	2b	Cmc
ZP	-	CZRF52C15	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 200mW	1005	70d	2b	Cmc
ZP	-	CZRFR52C15	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 200mW	1005	70d	2b	Cmc
ZP	-	CZRQR52C15	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 125mW	0402	70d	2b	Cmc
ZP	-	CZRUR52C15	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 150mW	0603	70d	2b	Cmc
ZP	-	DDZ34	Zener diode	34V±10%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
ZP	-	KDZ6.8VV	Zener diode	6.40..7.20V, Izt=5mA, Zzt=25Ω, 100mW	VSC	7d	1a	Kec
ZP	-	MM3Z22VC	Zener diode	20.9..23.1V, Zzt=51Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
ZP	-	P4SMAJ70CA	TVS	Vrwm=70V, 3.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZP	-	PDZ22B	Zener diode	22V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZP	-	PDZ22BF	Zener diode	21.54..22.47V, Zzt=25Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
ZP	-	PMF70CA	TVS	Vbr=77.8..86.0V, Vrwm=70V, Ipp=1.77A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
ZP	-	SMAJ70CA	TVS	Vrwm=70V, Vbr=77.8..86V, 3.5A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
ZP	-	TCMM3Z22VC	Zener diode	22V±5%, Izt=5mA, Zzt=51Ω, 200mW	SOD-323FL	7d	1a	Tac
ZP	-	TPSMA18A	TVS	Vrwm=18V, Ipp=15.9A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZP	-	TSZL52C15	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 200mW	1005	70d	2d	Tsc
ZP	-	TSZU52C15	Zener diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 150mW	0603	70d	2d	Tsc
ZP	-	TV04A700JB-G	TVS	Vrwm=70.0V, Vbr=77.80..86.0V, Ipp=3.54A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZP	-	TZD6.8WU	Zener diode	6.65..6.93V, Izt=5mA, Zzt=40Ω, 100mW	SOD-723	7d	1a	Ttr
ZP	-	TZDP22BWS	Zener diode	21.54..22.47V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZQ	-	BZX284-C36	Zener diode	36V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZQ	-	CD0603-Z16	Zener diode	15.2..16.8V, 5mA, Zzt=40Ω, 150mW	0603	70d	2b	Brn
ZQ	-	CD1005-Z16	Zener diode	15.2..16.8V, 5mA, Zzt=40Ω, 200mW	1005	70d	2b	Brn
ZQ	-	CZRER52C16	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 150mW	SOD-723F	70d	2b	Cmc
ZQ	-	CZRERT52C16	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 150mW	SOD-723F	70d	2b	Cmc
ZQ	-	CZRF52C16	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 200mW	1005	70d	2b	Cmc
ZQ	-	CZRFR52C16	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 200mW	1005	70d	2b	Cmc
ZQ	-	CZRQR52C16	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 125mW	0402	70d	2b	Cmc
ZQ	-	CZRUR52C16	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 150mW	0603	70d	2b	Cmc
ZQ	-	DDZ36	Zener diode	36V±10%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
ZQ	-	DDZ36S	Zener diode	36V±10%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
ZQ	-	KDZ7.5VV	Zener diode	7.0..7.90V, Izt=5mA, Zzt=23Ω, 100mW	VSC	7d	1a	Kec
ZQ	-	P4SMAJ75C	TVS	Vrwm=75V, 3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZQ	-	PDZ24B	Zener diode	24V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZQ	-	SMAJ75C	TVS	Vrwm=75V, Vbr=83.3..102V, 3A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZQ	-	TPSMA20A	TVS	Vrwm=20V, Ipp=14.4A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZQ	-	TSZL52C16	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 200mW	1005	70d	2d	Tsc
ZQ	-	TSZU52C16	Zener diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 150mW	0603	70d	2d	Tsc
ZQ	-	TV04A750KB-G	TVS	Vrwm=75.0V, Vbr=83.30..102.0V, Ipp=2.99A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZQ	-	TZD7.5WU	Zener diode	7.28..7.60V, Izt=5mA, Zzt=30Ω, 100mW	SOD-723	7d	1a	Ttr
ZQ	-	TZDP24BWS	Zener diode	23.72..24.78V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZR	-	BZX284-C39	Zener diode	39V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZR	-	CD0603-Z18	Zener diode	17.1..18.9V, 5mA, Zzt=50Ω, 150mW	0603	70d	2b	Brn
ZR	-	CD1005-Z18	Zener diode	17.1..18.9V, 5mA, Zzt=50Ω, 200mW	1005	70d	2b	Brn
ZR	-	CZRER52C18	Zener diode	17.10..18.90V, Izt=5mA, Zzt=50Ω, 150mW	SOD-723F	70d	2b	Cmc
ZR	-	CZRERT52C18	Zener diode	17.10..18.90V, Izt=5mA, Zzt=50Ω, 150mW	SOD-723F	70d	2b	Cmc
ZR	-	CZRF52C18	Zener diode	17.10..18.90V, Izt=5mA, Zzt=50Ω, 200mW	1005	70d	2b	Cmc
ZR	-	CZRFR52C18	Zener diode	17.10..18.90V, Izt=5mA, Zzt=50Ω, 200mW	1005	70d	2b	Cmc
ZR	-	CZRQR52C18	Zener diode	17.10..18.90V, Izt=5mA, Zzt=50Ω, 125mW	0402	70d	2b	Cmc
ZR	-	CZRUR52C18	Zener diode	17.10..18.90V, Izt=5mA, Zzt=50Ω, 150mW	0603	70d	2b	Cmc
ZR	-	DDZ43	Zener diode	43V±10%, Izt=10mA, 500mW	SOD-123	5d	1d	Di
ZR	-	DDZ43S	Zener diode	43V±10%, Izt=5mA, 200mW	SOD-323	5d	1d	Di
ZR	-	KDZ8.2VV	Zener diode	7.70..8.70V, Izt=5mA, Zzt=20Ω, 100mW	VSC	7d	1a	Kec
ZR	-	MM3Z24VC	Zener diode	22.8..25.2V, Zzt=65Ω, Izt=5mA, 200mW	SOD-323FL	7d	1a	F
ZR	-	P4SMAJ75CA	TVS	Vrwm=75V, 3.3A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZR	-	PDZ27B	Zener diode	27V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZR	-	PDZ27BF	Zener diode	26.19..27.53V, Zzt=40Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
ZR	-	PMF75CA	TVS	Vbr=83.3..92.1V, Vrwm=75V, Ipp=1.65A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
ZR	-	SMAJ75CA	TVS	Vrwm=75V, Vbr=83.3..92.1V, 3.3A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZR	-	TCMM3Z24VC	Zener diode	24V±5%, Izt=5mA, Zzt=65Ω, 200mW	SOD-323FL	7d	1a	Tac
ZR	-	TPSMA22A	TVS	Vrwm=22V, Ipp=13.1A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZR	-	TSZL52C18	Zener diode	17.10..18.90V, Izt=5mA, Zzt=50Ω, 200mW	1005	70d	2d	Tsc
ZR	-	TSZU52C18	Zener diode	17.10..18.90V, Izt=5mA, Zzt=50Ω, 150mW	0603	70d	2d	Tsc
ZR	-	TV04A750JB-G	TVS	Vrwm=75.0V, Vbr=83.30..92.10V, Ipp=3.31A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZR	-	TZD8.2WU	Zener diode	8.02..8.36V, Izt=5mA, Zzt=30Ω, 100mW	SOD-723	7d	1a	Ttr
ZR	-	TZDP27BWS	Zener diode	26.19..27.53V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZS	-	BZX284-C43	Zener diode	43V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZS	-	CD0603-Z20	Zener diode	19..21V, 5mA, Zzt=50Ω, 150mW	0603	70d	2b	Brn
ZS	-	CD1005-Z20	Zener diode	19..21V, 5mA, Zzt=50Ω, 200mW	1005	70d	2b	Brn
ZS	-	CZRER52C20	Zener diode	19.0..21.0V, Izt=5mA, Zzt=50Ω, 150mW	SOD-723F	70d	2b	Cmc
ZS	-	CZRERT52C20	Zener diode	19.0..21.0V, Izt=5mA, Zzt=50Ω, 150mW	SOD-723F	70d	2b	Cmc
ZS	-	CZRF52C20	Zener diode	19.0..21.0V, Izt=5mA, Zzt=50Ω, 200mW	1005	70d	2b	Cmc
ZS	-	CZRFR52C20	Zener diode	19.0..21.0V, Izt=5mA, Zzt=50Ω, 200mW	1005	70d	2b	Cmc
ZS	-	CZRQR52C20	Zener diode	19.0..21.0V, Izt=5mA, Zzt=50Ω, 125mW	0402	70d	2b	Cmc
ZS	-	CZRUR52C20	Zener diode	19.0..21.0V, Izt=5mA, Zzt=50Ω, 150mW	0603	70d	2b	Cmc
ZS	-	KDZ9.1VV	Zener diode	8.50..9.60V, Izt=5mA, Zzt=18Ω, 100mW	VSC	7d	1a	Kec
ZS	-	MM3Z27VC	Zener diode	25.65..28.35V, Zzt=75Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
ZS	-	P4SMAJ78C	TVS	Vrwm=78V, 2.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZS	-	PDZ30B	Zener diode	30V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZS	-	SMAJ78C	TVS	Vrwm=78V, Vbr=86.7..106V, 2.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZS	-	TCMM3Z27VC	Zener diode	27V±5%, Izt=5mA, Zzt=75Ω, 200mW	SOD-323FL	7d	1a	Tac
ZS	-	TPSMA24A	TVS	Vrwm=24V, Ipp=12A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZS	-	TSZL52C20	Zener diode	19.0..21.0V, Izt=5mA, Zzt=50Ω, 200mW	1005	70d	2d	Tsc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
ZS	-	TSZU52C20	Zener diode	19.0..21.0V, Izt=5mA, Zzt=50Ω, 150mW	0603	70d	2d	Tsc
ZS	-	TV04A780KB-G	TVS	Vrwm=78.0V, Vbr=86.70..106.0V, Ipp=2.88A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZS	-	TV04A800KB-G	TVS	Vrwm=80.0V, Vbr=88.96..108.80V, Ipp=2.79A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZS	-	TZD9.1WU	Zener diode	8.85..9.23V, Izt=5mA, Zzt=30Ω, 100mW	SOD-723	7d	1a	Ttr
ZS	-	TZDP30BWS	Zener diode	29.19..30.69V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZT	-	BZX284-C47	Zener diode	47V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZT	-	CD0603-Z22	Zener diode	20.9..23.1V, 5mA, Zzt=55Ω, 150mW	0603	70d	2b	Brn
ZT	-	CD1005-Z22	Zener diode	20.9..23.1V, 5mA, Zzt=55Ω, 200mW	1005	70d	2b	Brn
ZT	-	CZRER52C22	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 150mW	SOD-723F	70d	2b	Cmc
ZT	-	CZRERT52C22	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 150mW	SOD-723F	70d	2b	Cmc
ZT	-	CZRF52C22	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 200mW	1005	70d	2b	Cmc
ZT	-	CZRFR52C22	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 200mW	1005	70d	2b	Cmc
ZT	-	CZRQR52C22	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 125mW	0402	70d	2b	Cmc
ZT	-	CZRUR52C22	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 150mW	0603	70d	2b	Cmc
ZT	-	MM3Z30VC	Zener diode	28.5..31.5V, Zzt=75Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
ZT	-	P4SMAJ78CA	TVS	Vrwm=78V, 2.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZT	-	PDZ33B	Zener diode	33V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZT	-	PDZ33BF	Zener diode	32.15..33.79V, Zzt=40Ω, Izt=5mA, 400mW	SOD-323FL	7d	1a	Pjt
ZT	-	PMF78CA	TVS	Vbr=86.7..95.8V, Vrwm=78V, Ipp=1.59A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
ZT	-	SMAJ78CA	TVS	Vrwm=78V, Vbr=86.7..95.8V, 3.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZT	-	TCMM3Z30VC	Zener diode	30V±5%, Izt=5mA, Zzt=75Ω, 200mW	SOD-323FL	7d	1a	Tac
ZT	-	TPSMA27A	TVS	Vrwm=27V, Ipp=10.7A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZT	-	TSZL52C22	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 200mW	1005	70d	2d	Tsc
ZT	-	TSZU52C22	Zener diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 150mW	0603	70d	2d	Tsc
ZT	-	TV04A780JB-G	TVS	Vrwm=78.0V, Vbr=86.70..95.80V, Ipp=3.17A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZT	-	TV04A800JB-G	TVS	Vrwm=80.0V, Vbr=88.80..97.60V, Ipp=3.09A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZT	-	TZDP33BWS	Zener diode	32.15..33.79V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZU	-	BZX284-C51	Zener diode	51V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZU	-	CD0603-Z24	Zener diode	22.8..25.2V, 5mA, Zzt=80Ω, 150mW	0603	70d	2b	Brn
ZU	-	CD1005-Z24	Zener diode	22.8..25.2V, 5mA, Zzt=80Ω, 200mW	1005	70d	2b	Brn
ZU	-	CZRER52C24	Zener diode	22.80..25.20V, Izt=5mA, Zzt=80Ω, 150mW	SOD-723F	70d	2b	Cmc
ZU	-	CZRERT52C24	Zener diode	22.80..25.20V, Izt=5mA, Zzt=80Ω, 150mW	SOD-723F	70d	2b	Cmc
ZU	-	CZRF52C24	Zener diode	22.80..25.20V, Izt=5mA, Zzt=80Ω, 200mW	1005	70d	2b	Cmc
ZU	-	CZRFR52C24	Zener diode	22.80..25.20V, Izt=5mA, Zzt=80Ω, 200mW	1005	70d	2b	Cmc
ZU	-	CZRQR52C24	Zener diode	22.80..25.20V, Izt=5mA, Zzt=80Ω, 125mW	0402	70d	2b	Cmc
ZU	-	CZRUR52C24	Zener diode	22.80..25.20V, Izt=5mA, Zzt=80Ω, 150mW	0603	70d	2b	Cmc
ZU	-	MM3Z33VC	Zener diode	31.35..34.65V, Zzt=75Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
ZU	-	P4SMAJ85C	TVS	Vrwm=85V, 2.6A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZU	-	PDZ36B	Zener diode	36V±2.5%, If=400mA, 400mW	SOD-323	5d	1a	Phi
ZU	-	PMF80CA	TVS	Vbr=88.8..97.6V, Vrwm=80V, Ipp=1.55A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
ZU	-	SMAJ85C	TVS	Vrwm=85V, Vbr=94.4..115V, 2.0A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZU	-	TCMM3Z33VC	Zener diode	33V±5%, Izt=5mA, Zzt=75Ω, 200mW	SOD-323FL	7d	1a	Tac
ZU	-	TPSMA30A	TVS	Vrwm=30V, Ipp=9.7A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZU	-	TSZL52C24	Zener diode	22.80..25.20V, Izt=5mA, Zzt=80Ω, 200mW	1005	70d	2d	Tsc
ZU	-	TSZU52C24	Zener diode	22.80..25.20V, Izt=5mA, Zzt=80Ω, 150mW	0603	70d	2d	Tsc
ZU	-	TV04A850KB-G	TVS	Vrwm=85.0V, Vbr=94.40..115.0V, Ipp=2.65A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZU	-	TZDP36BWS	Zener diode	35.07..36.87V, Izt=5mA, 400mW	SOD-323F	7d	1a	Ttr
ZV	-	BZX284-C56	Zener diode	56V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZV	-	CD0603-Z27	Zener diode	25.65..28.35V, 5mA, Zzt=80Ω, 150mW	0603	70d	2b	Brn
ZV	-	CD1005-Z27	Zener diode	25.65..28.35V, 5mA, Zzt=80Ω, 200mW	1005	70d	2b	Brn
ZV	-	CZRER52C27	Zener diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 150mW	SOD-723F	70d	2b	Cmc
ZV	-	CZRERT52C27	Zener diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 150mW	SOD-723F	70d	2b	Cmc
ZV	-	CZRF52C27	Zener diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 200mW	1005	70d	2b	Cmc
ZV	-	CZRFR52C27	Zener diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 200mW	1005	70d	2b	Cmc
ZV	-	CZRQR52C27	Zener diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 125mW	0402	70d	2b	Cmc
ZV	-	CZRUR52C27	Zener diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 150mW	0603	70d	2b	Cmc
ZV	-	MM3Z36VC	Zener diode	34.2..37.8V, Zzt=84Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
ZV	-	P4SMAJ85CA	TVS	Vrwm=85V, 2.9A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZV	-	PMF85CA	TVS	Vbr=94.4..104V, Vrwm=85V, Ipp=1.46A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
ZV	-	SMAJ85CA	TVS	Vrwm=85V, Vbr=94.4..104V, 2.2A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZV	-	TCMM3Z36VC	Zener diode	36V±5%, Izt=5mA, Zzt=84Ω, 200mW	SOD-323FL	7d	1a	Tac
ZV	-	TPSMA33A	TVS	Vrwm=3V, Ipp=8.8A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZV	-	TSZL52C27	Zener diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 200mW	1005	70d	2d	Tsc
ZV	-	TSZU52C27	Zener diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 150mW	0603	70d	2d	Tsc
ZV	-	TV04A850JB-G	TVS	Vrwm=85.0V, Vbr=94.40..104.0V, Ipp=2.92A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZW	-	BZX284-C62	Zener diode	62V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZW	-	CD0603-Z30	Zener diode	28.5..31.5V, 5mA, Zzt=80Ω, 150mW	0603	70d	2b	Brn
ZW	-	CD1005-Z30	Zener diode	28.5..31.5V, 5mA, Zzt=80Ω, 200mW	1005	70d	2b	Brn
ZW	-	CZRER52C30	Zener diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 150mW	SOD-723F	70d	2b	Cmc
ZW	-	CZRERT52C30	Zener diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 150mW	SOD-723F	70d	2b	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
ZW	-	CZRF52C30	Zener diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 200mW	1005	70d	2b	Cmc
ZW	-	CZRFR52C30	Zener diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 200mW	1005	70d	2b	Cmc
ZW	-	CZRQR52C30	Zener diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 125mW	0402	70d	2b	Cmc
ZW	-	CZRUR52C30	Zener diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 150mW	0603	70d	2b	Cmc
ZW	-	MM3Z39VC	Zener diode	37.05..40.95V, Zzt=122Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
ZW	-	P4SMAJ90C	TVS	Vrwm=90V, 2.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZW	-	SMAJ90C	TVS	Vrwm=90V, Vbr=100..122V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZW	-	TCMM3Z39VC	Zener diode	39V±5%, Izt=5mA, Zzt=122Ω, 200mW	SOD-323FL	7d	1a	Tac
ZW	-	TPSMA36A	TVS	Vrwm=36V, Ipp=8.0A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZW	-	TSZL52C30	Zener diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 200mW	1005	70d	2d	Tsc
ZW	-	TSZU52C30	Zener diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 150mW	0603	70d	2d	Tsc
ZW	-	TV04A900KB-G	TVS	Vrwm=90V, Vbr=100.0..122.0V, Ipp=2.50A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZX	-	BZX284-C68	Zener diode	68V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZX	-	CD0603-Z33	Zener diode	31.35..34.65V, 5mA, Zzt=80Ω, 150mW	0603	70d	2b	Brn
ZX	-	CD1005-Z33	Zener diode	31.35..34.65V, 5mA, Zzt=80Ω, 200mW	1005	70d	2b	Brn
ZX	-	CZRER52C33	Zener diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 150mW	SOD-723F	70d	2b	Cmc
ZX	-	CZRERT52C33	Zener diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 150mW	SOD-723F	70d	2b	Cmc
ZX	-	CZRF52C33	Zener diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 200mW	1005	70d	2b	Cmc
ZX	-	CZRFR52C33	Zener diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 200mW	1005	70d	2b	Cmc
ZX	-	CZRQR52C33	Zener diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 125mW	0402	70d	2b	Cmc
ZX	-	CZRUR52C33	Zener diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 150mW	0603	70d	2b	Cmc
ZX	-	MM3Z43VC	Zener diode	40.85..45.15V, Zzt=141Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
ZX	-	P4SMAJ90CA	TVS	Vrwm=90V, 2.7A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZX	-	PMF90CA	TVS	Vbr=100..111V, Vrwm=90V, Ipp=1.37A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
ZX	-	SMAJ90CA	TVS	Vrwm=90V, Vbr=100..111V, 2.1A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZX	-	TCMM3Z43VC	Zener diode	43V±5%, Izt=5mA, Zzt=141Ω, 200mW	SOD-323FL	7d	1a	Tac
ZX	-	TPSMA39A	TVS	Vrwm=39V, Ipp=7.4A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZX	-	TSZL52C33	Zener diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 200mW	1005	70d	2d	Tsc
ZX	-	TSZU52C33	Zener diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 150mW	0603	70d	2d	Tsc
ZX	-	TV04A900JB-G	TVS	Vrwm=90V, Vbr=100.0..111.0V, Ipp=2.74A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZY	-	BZX284-C75	Zener diode	75V±5%, If=250mA, 400mW	SOD-110	12d	1a	Phi
ZY	-	CD0603-Z36	Zener diode	34.2..37.8V, 5mA, Zzt=90Ω, 150mW	0603	70d	2b	Brn
ZY	-	CD1005-Z36	Zener diode	34.2..37.8V, 5mA, Zzt=90Ω, 200mW	1005	70d	2b	Brn
ZY	-	CZRER52C36	Zener diode	34.20..37.80V, Izt=5mA, Zzt=90Ω, 150mW	SOD-723F	70d	2b	Cmc
ZY	-	CZRERT52C36	Zener diode	34.20..37.80V, Izt=5mA, Zzt=90Ω, 150mW	SOD-723F	70d	2b	Cmc
ZY	-	CZRF52C36	Zener diode	34.20..37.80V, Izt=5mA, Zzt=90Ω, 200mW	1005	70d	2b	Cmc
ZY	-	CZRFR52C36	Zener diode	34.20..37.80V, Izt=5mA, Zzt=90Ω, 200mW	1005	70d	2b	Cmc
ZY	-	CZRQR52C36	Zener diode	34.20..37.80V, Izt=5mA, Zzt=90Ω, 125mW	0402	70d	2b	Cmc
ZY	-	CZRUR52C36	Zener diode	34.20..37.80V, Izt=5mA, Zzt=90Ω, 150mW	0603	70d	2b	Cmc
ZY	-	MM3Z47VC	Zener diode	44.65..49.35V, Zzt=160Ω, Izt=2mA, 200mW	SOD-323FL	7d	1a	F
ZY	-	P4SMAJ100C	TVS	Vrwm=100V, 2.2A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZY	-	SMAJ100C	TVS	Vrwm=100V, Vbr=111..136V, 1.7A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZY	-	TCMM3Z47VC	Zener diode	47V±5%, Izt=5mA, Zzt=160Ω, 200mW	SOD-323FL	7d	1a	Tac
ZY	-	TPSMA43A	TVS	Vrwm=43V, Ipp=6.7A, 400W (1ms)	DO-214AC	1d	2j	Fag
ZY	-	TSZL52C36	Zener diode	34.20..37.80V, Izt=5mA, Zzt=90Ω, 200mW	1005	70d	2d	Tsc
ZY	-	TSZU52C36	Zener diode	34.20..37.80V, Izt=5mA, Zzt=90Ω, 150mW	0603	70d	2d	Tsc
ZY	-	TV04A101KB-G	TVS	Vrwm=100.0V, Vbr=111.0..136.0V, Ipp=2.23A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZZ	-	CD0603-Z39	Zener diode	37.05..40.95V, 5mA, Zzt=90Ω, 150mW	0603	70d	2b	Brn
ZZ	-	CD1005-Z39	Zener diode	37.05..40.95V, 5mA, Zzt=90Ω, 200mW	1005	70d	2b	Brn
ZZ	-	CZRER52C39	Zener diode	37.05..40.95V, Izt=5mA, Zzt=90Ω, 150mW	SOD-723F	70d	2b	Cmc
ZZ	-	CZRERT52C39	Zener diode	37.05..40.95V, Izt=5mA, Zzt=90Ω, 150mW	SOD-723F	70d	2b	Cmc
ZZ	-	CZRF52C39	Zener diode	37.05..40.95V, Izt=5mA, Zzt=90Ω, 200mW	1005	70d	2b	Cmc
ZZ	-	CZRFR52C39	Zener diode	37.05..40.95V, Izt=5mA, Zzt=90Ω, 200mW	1005	70d	2b	Cmc
ZZ	-	CZRQR52C39	Zener diode	37.05..40.95V, Izt=5mA, Zzt=90Ω, 125mW	0402	70d	2b	Cmc
ZZ	-	CZRUR52C39	Zener diode	37.05..40.95V, Izt=5mA, Zzt=90Ω, 150mW	0603	70d	2b	Cmc
ZZ	-	P4SMAJ100CA	TVS	Vrwm=100V, 2.5A, 400W (1ms), Bidir.	DO-214AC	1ba	1j	Lsr
ZZ	-	PMF100CA	TVS	Vbr=111..123V, Vrwm=100V, Ipp=1.23A, 200W(1ms), Bidir.	SOD-123FL	7ba	1j	Shp
ZZ	-	SMAJ100CA	TVS	Vrwm=100V, Vbr=111..123V, 1.9A, 400W(1ms), Bidir.	DO-214AC	1ba	1l	Vs
ZZ	-	TSZL52C39	Zener diode	37.05..40.95V, Izt=5mA, Zzt=90Ω, 200mW	1005	70d	2d	Tsc
ZZ	-	TSZU52C39	Zener diode	37.05..40.95V, Izt=5mA, Zzt=90Ω, 150mW	0603	70d	2d	Tsc
ZZ	-	TV04A101JB-G	TVS	Vrwm=100.0V, Vbr=111.0..123.0V, Ipp=2.47A, 400W(1ms), Bidir.	DO-214AC	1ba	2o	Cmc
ZZJ	-	SMFZ4.3V	Zener diode	4.3..4.8V, Izt=40mA, 1W	SMF	9d	2z	Kec
ZZK	-	SMFZ4.7V	Zener diode	4.7..5.2V, Izt=40mA, 1W	SMF	9d	2z	Kec
ZZL	-	SMFZ5.1V	Zener diode	5.1..5.7V, Izt=40mA, 1W	SMF	9d	2z	Kec
ZZM	-	SMFZ5.6V	Zener diode	5.6..6.3V, Izt=40mA, 1W	SMF	9d	2z	Kec
ZZN	-	SMFZ6.2V	Zener diode	6.2..7.0V, Izt=40mA, 1W	SMF	9d	2z	Kec
ZZP	-	SMFZ6.8V	Zener diode	6.8..7.7V, Izt=40mA, 1W	SMF	9d	2z	Kec
ZZQ	-	SMFZ7.5V	Zener diode	7.5..8.4V, Izt=40mA, 1W	SMF	9d	2z	Kec
ZZR	-	SMFZ8.2V	Zener diode	8.2..9.3V, Izt=40mA, 1W	SMF	9d	2z	Kec
ZZS	-	SMFZ9.1V	Zener diode	9.1..10.2V, Izt=40mA, 1W	SMF	9d	2z	Kec

SECTION 2
SOD-80 (MELF) case SMD semiconductor components

0
1
2
3
4
5
6
7
8
9
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
10A	-	GLZ10A	Z-diode	9.12..9.59V, Zzt=8 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
10A	-	TLZ10A	Z-diode	9.12..9.59V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2g	Ttr
10B	-	GLZ10B	Z-diode	9.41..9.90V, Zzt=8 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
10B	-	TLZ10B	Z-diode	9.41..9.90V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2g	Ttr
10B	-	ZMM10B	Z-diode	9.5..10.5V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
10C	-	GLZ10C	Z-diode	9.70..10.20V, Zzt=8 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
10C	-	TLZ10C	Z-diode	9.70..10.20V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2g	Ttr
10C	-	ZMM10C	Z-diode	9.8..10.2V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
10D	-	GLZ10D	Z-diode	9.94..10.44V, Zzt=8 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
10D	-	TLZ10D	Z-diode	9.94..10.44V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2g	Ttr
10D	-	ZMM10D	Z-diode	9.9..10.1V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
11A	-	GLZ11A	Z-diode	10.18..10.71V, Zzt=10 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
11A	-	TLZ11A	Z-diode	10.18..10.71V, Izt=10mA, Zzt=10 Ohm, 500mW	SOD-80	15d	2g	Ttr
11B	-	GLZ11B	Z-diode	10.50..11.05V, Zzt=10 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
11B	-	TLZ11B	Z-diode	10.50..11.05V, Izt=10mA, Zzt=10 Ohm, 500mW	SOD-80	15d	2g	Ttr
11B	-	ZMM11B	Z-diode	10.45..11.55V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
11C	-	GLZ11C	Z-diode	10.82..11.38V, Zzt=10 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
11C	-	TLZ11C	Z-diode	10.82..11.38V, Izt=10mA, Zzt=10 Ohm, 500mW	SOD-80	15d	2g	Ttr
11C	-	ZMM11C	Z-diode	10.78..11.22V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
11D	-	ZMM11D	Z-diode	10.89..11.11V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
12A	-	GLZ12A	Z-diode	11.13..11.71V, Zzt=12 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
12A	-	TLZ12A	Z-diode	11.13..11.71V, Izt=10mA, Zzt=12 Ohm, 500mW	SOD-80	15d	2g	Ttr
12B	-	GLZ12B	Z-diode	11.44..12.03V, Zzt=12 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
12B	-	TLZ12B	Z-diode	11.44..12.03V, Izt=10mA, Zzt=12 Ohm, 500mW	SOD-80	15d	2g	Ttr
12B	-	ZMM12B	Z-diode	11.4..12.6V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
12C	-	GLZ12C	Z-diode	11.74..12.35V, Zzt=12 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
12C	-	TLZ12C	Z-diode	11.74..12.35V, Izt=10mA, Zzt=12 Ohm, 500mW	SOD-80	15d	2g	Ttr
12C	-	ZMM12C	Z-diode	11.76..12.24V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
12D	-	ZMM12D	Z-diode	11.88..12.12V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
13A	-	GLZ13A	Z-diode	12.11..12.75V, Zzt=14 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
13A	-	TLZ13A	Z-diode	12.11..12.75V, Izt=10mA, Zzt=14 Ohm, 500mW	SOD-80	15d	2g	Ttr
13B	-	GLZ13B	Z-diode	12.55..13.21V, Zzt=14 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
13B	-	TLZ13B	Z-diode	12.55..13.21V, Izt=10mA, Zzt=14 Ohm, 500mW	SOD-80	15d	2g	Ttr
13B	-	ZMM13B	Z-diode	12.35..13.65V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
13C	-	GLZ13C	Z-diode	12.99..13.66V, Zzt=14 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
13C	-	TLZ13C	Z-diode	12.99..13.66V, Izt=10mA, Zzt=14 Ohm, 500mW	SOD-80	15d	2g	Ttr
13C	-	ZMM13C	Z-diode	12.74..13.26V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
13D	-	ZMM13D	Z-diode	12.87..13.13V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
15	bd	RKZ15-2KD	Z-diode	14.5..15.1V, Izt=5mA, Zzt=40 Ohm, 500mW	LLD	15d	2g	Ren
15	be	RKZ15-1KD	Z-diode	14.1..14.7V, Izt=5mA, Zzt=40 Ohm, 500mW	LLD	15d	2g	Ren
15	bf	RKZ15-3KD	Z-diode	14.9..15.5V, Izt=5mA, Zzt=40 Ohm, 500mW	LLD	15d	2g	Ren
15A	-	GLZ15A	Z-diode	13.44..14.13V, Zzt=16 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
15A	-	TLZ15A	Z-diode	13.44..14.13V, Izt=10mA, Zzt=16 Ohm, 500mW	SOD-80	15d	2g	Ttr
15B	-	GLZ15B	Z-diode	13.89..14.62V, Zzt=16 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
15B	-	TLZ15B	Z-diode	13.89..14.62V, Izt=10mA, Zzt=16 Ohm, 500mW	SOD-80	15d	2g	Ttr
15B	-	ZMM15B	Z-diode	14.25..15.75V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
15C	-	GLZ15C	Z-diode	14.35..15.09V, Zzt=16 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
15C	-	TLZ15C	Z-diode	14.35..15.09V, Izt=10mA, Zzt=16 Ohm, 500mW	SOD-80	15d	2g	Ttr
15C	-	ZMM15C	Z-diode	14.7..15.3 5V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
15D	-	ZMM15D	Z-diode	14.85..15.15V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
16	bd	RKZ16-2KD	Z-diode	15.7..16.5V, Izt=5mA, Zzt=45 Ohm, 500mW	LLD	15d	2g	Ren
16	be	RKZ16-1KD	Z-diode	15.3..15.9V, Izt=5mA, Zzt=45 Ohm, 500mW	LLD	15d	2g	Ren
16	bf	RKZ16-3KD	Z-diode	16.3..17.1V, Izt=5mA, Zzt=45 Ohm, 500mW	LLD	15d	2g	Ren
16A	-	GLZ16A	Z-diode	14.80..15.57V, Zzt=18 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
16A	-	TLZ16A	Z-diode	14.80..15.57V, Izt=10mA, Zzt=18 Ohm, 500mW	SOD-80	15d	2g	Ttr
16B	-	GLZ16B	Z-diode	15.25..16.04V, Zzt=18 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
16B	-	TLZ16B	Z-diode	15.25..16.04V, Izt=10mA, Zzt=18 Ohm, 500mW	SOD-80	15d	2g	Ttr
16B	-	ZMM16B	Z-diode	15.2..16.8V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
16C	-	GLZ16C	Z-diode	15.69..16.51V, Zzt=18 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
16C	-	TLZ16C	Z-diode	15.69..16.51V, Izt=10mA, Zzt=18 Ohm, 500mW	SOD-80	15d	2g	Ttr
16C	-	ZMM16C	Z-diode	15.68..16.32V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
16D	-	ZMM16D	Z-diode	15.84..16.16V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
18	bd	RKZ18-2KD	Z-diode	17.5..18.3V, Izt=5mA, Zzt=55 Ohm, 500mW	LLD	15d	2g	Ren
18	be	RKZ18-1KD	Z-diode	16.9..17.7V, Izt=5mA, Zzt=55 Ohm, 500mW	LLD	15d	2g	Ren
18	bf	RKZ18-3KD	Z-diode	18.1..19.0V, Izt=5mA, Zzt=55 Ohm, 500mW	LLD	15d	2g	Ren
18A	-	GLZ18A	Z-diode	16.22..17.06V, Zzt=23 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
18A	-	TLZ18A	Z-diode	16.22..17.06V, Izt=10mA, Zzt=23 Ohm, 500mW	SOD-80	15d	2g	Ttr
18B	-	GLZ18B	Z-diode	16.82..17.70V, Zzt=23 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
18B	-	TLZ18B	Z-diode	16.82..17.70V, Izt=10mA, Zzt=23 Ohm, 500mW	SOD-80	15d	2g	Ttr
18B	-	ZMM18B	Z-diode	17.1..18.9V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
18C	-	GLZ18C	Z-diode	17.42..18.33V, Zzt=23 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
18C	-	TLZ18C	Z-diode	16.22..18.33V, Izt=10mA, Zzt=23 Ohm, 500mW	SOD-80	15d	2g	Ttr
18C	-	ZMM18C	Z-diode	17.64..18.36V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
18D	-	ZMM18D	Z-diode	17.82..18.18V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
20	bd	RKZ20-2KD	Z-diode	19.5..20.4V, Izt=2mA, Zzt=60 Ohm, 500mW	LLD	15d	2g	Ren
20	be	RKZ20-1KD	Z-diode	18.8..19.7V, Izt=2mA, Zzt=60 Ohm, 500mW	LLD	15d	2g	Ren
20	bf	RKZ20-3KD	Z-diode	20.2..21.1V, Izt=2mA, Zzt=60 Ohm, 500mW	LLD	15d	2g	Ren
20A	-	GLZ20A	Z-diode	18.02..18.96V, Zzt=28 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
20A	-	TLZ20A	Z-diode	18.02..18.96V, Izt=10mA, Zzt=28 Ohm, 500mW	SOD-80	15d	2g	Ttr
20B	-	GLZ20B	Z-diode	18.63..19.59V, Zzt=28 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
20B	-	TLZ20B	Z-diode	18.63..19.59V, Izt=10mA, Zzt=28 Ohm, 500mW	SOD-80	15d	2g	Ttr
20B	-	ZMM20B	Z-diode	19..21 5V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
20C	-	GLZ20C	Z-diode	19.23..20.22V, Zzt=28 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
20C	-	TLZ20C	Z-diode	19.23..20.22V, Izt=10mA, Zzt=28 Ohm, 500mW	SOD-80	15d	2g	Ttr
20C	-	ZMM20C	Z-diode	19.6..20.4V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
20D	-	GLZ20D	Z-diode	19.72..20.72V, Zzt=28 Ohm, Izt=10mA, 500mW	SOD-80	15d	2c	Pjt
20D	-	TLZ20D	Z-diode	19.72..20.72V, Izt=10mA, Zzt=28 Ohm, 500mW	SOD-80	15d	2g	Ttr
20D	-	ZMM20D	Z-diode	19.8..20.2V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
22	bd	RKZ22-2KD	Z-diode	21.6..22.6V, Izt=2mA, Zzt=65 Ohm, 500mW	LLD	15d	2g	Ren
22	be	RKZ22-1KD	Z-diode	20.9..21.9V, Izt=2mA, Zzt=65 Ohm, 500mW	LLD	15d	2g	Ren
22	bf	RKZ22-3KD	Z-diode	22.3..23.3V, Izt=2mA, Zzt=65 Ohm, 500mW	LLD	15d	2g	Ren
22A	-	GLZ22A	Z-diode	20.15..21.20V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
22A	-	TLZ22A	Z-diode	20.15..21.20V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
22B	-	GLZ22B	Z-diode	20.64..21.71V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
22B	-	TLZ22B	Z-diode	20.64..21.71V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
22B	-	ZMM22B	Z-diode	20.9..23.1 5V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
22C	-	GLZ22C	Z-diode	21.08..22.17V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
22C	-	TLZ22C	Z-diode	21.08..22.17V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
22C	-	ZMM22C	Z-diode	21.56..22.44V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
22D	-	GLZ22D	Z-diode	21.52..22.63V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
22D	-	TLZ22D	Z-diode	21.52..22.63V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
22D	-	ZMM22D	Z-diode	21.78..22.22V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
24	bd	RKZ24-2KD	Z-diode	23.6..24.7V, Izt=2mA, Zzt=70 Ohm, 500mW	LLD	15d	2g	Ren
24	be	RKZ24-1KD	Z-diode	22.9..24.0V, Izt=2mA, Zzt=70 Ohm, 500mW	LLD	15d	2g	Ren
24	bf	RKZ24-3KD	Z-diode	24.3..25.5V, Izt=2mA, Zzt=70 Ohm, 500mW	LLD	15d	2g	Ren
24A	-	GLZ24A	Z-diode	22.05..23.18V, Zzt=35 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
24A	-	TLZ24A	Z-diode	22.05..23.18V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
24B	-	GLZ24B	Z-diode	22.61..23.77V, Zzt=35 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
24B	-	TLZ24B	Z-diode	22.61..23.77V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
24B	-	ZMM24B	Z-diode	22.8..25.2 5V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
24C	-	GLZ24C	Z-diode	23.12..24.31V, Zzt=35 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
24C	-	TLZ24C	Z-diode	23.12..24.31V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
24C	-	ZMM24C	Z-diode	23.52..24.48V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
24D	-	GLZ24D	Z-diode	23.63..24.85V, Zzt=35 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
24D	-	TLZ24D	Z-diode	23.63..24.85V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
24D	-	ZMM24D	Z-diode	23.76..24.24V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
27	bd	RKZ27-2KD	Z-diode	26.2..27.6V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
27	be	RKZ27-1KD	Z-diode	25.2..26.6V, Izt=2mA, Zzt=80 Ohm, 500mW	LLD	15d	2g	Ren
27	bf	RKZ27-3KD	Z-diode	27.2..28.6V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
27A	-	GLZ27A	Z-diode	24.26..25.52V, Zzt=45 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
27A	-	TLZ27A	Z-diode	24.26..25.52V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
27B	-	GLZ27B	Z-diode	24.97..26.26V, Zzt=45 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
27B	-	TLZ27B	Z-diode	24.97..26.26V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
27B	-	ZMM27B	Z-diode	25.65..28.35V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
27C	-	GLZ27C	Z-diode	25.63..26.95V, Zzt=45 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
27C	-	TLZ27C	Z-diode	25.63..26.95V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
27C	-	ZMM27C	Z-diode	26.46..27.54V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
27D	-	GLZ27D	Z-diode	26.29..27.64V, Zzt=45 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
27D	-	TLZ27D	Z-diode	26.29..27.64V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
27D	-	ZMM27D	Z-diode	26.73..27.27V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
2A0	-	GLZ2.0A	Z-diode	1.88..2.10V, Zzt=140 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
2A0	-	TLZ2.0A	Z-diode	1.88..2.10V, Izt=20mA, Zzt=140 Ohm, 500mW	SOD-80	15d	2g	Ttr
2A2	-	GLZ2.2A	Z-diode	2.12..2.30V, Zzt=120 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
2A2	-	TLZ2.2A	Z-diode	2.12..2.30V, Izt=20mA, Zzt=120 Ohm, 500mW	SOD-80	15d	2g	Ttr
2A4	-	GLZ2.4A	Z-diode	2.33..2.52V, Zzt=100 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
2A4	-	TLZ2.4A	Z-diode	2.33..2.52V, Izt=20mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
2A7	-	GLZ2.7A	Z-diode	2.54..2.75V, Zzt=100 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
2A7	-	TLZ2.7A	Z-diode	2.54..2.75V, Izt=20mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
2B	bd	RKZ2B2KD	Z-diode	2.0..2.2V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
2B	be	RKZ2B1KD	Z-diode	1.9..2.1V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
2B	bf	RKZ2B3KD	Z-diode	2.1..2.3V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
2B0	-	GLZ2.0B	Z-diode	2.02..2.20V, Zzt=140 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
2B0	-	TLZ2.0B	Z-diode	2.02..2.20V, Izt=20mA, Zzt=140 Ohm, 500mW	SOD-80	15d	2g	Ttr
2B2	-	GLZ2.2B	Z-diode	2.22..2.41V, Zzt=120 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
2B2	-	TLZ2.2B	Z-diode	2.22..2.41V, Izt=20mA, Zzt=120 Ohm, 500mW	SOD-80	15d	2g	Ttr
2B4	-	GLZ2.4B	Z-diode	2.43..2.63V, Zzt=100 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
2B4	-	TLZ2.4B	Z-diode	2.43..2.63V, Izt=20mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
2B7	-	GLZ2.7B	Z-diode	2.69..2.91V, Zzt=100 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
2B7	-	TLZ2.7B	Z-diode	2.69..2.91V, Izt=20mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
2C	bd	RKZ2C2KD	Z-diode	2.3..2.5V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
2C	be	RKZ2C1KD	Z-diode	2.2..2.4V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
2C	bf	RKZ2C3KD	Z-diode	2.4..2.6V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
2V0B	-	ZMM2V0B	Z-diode	1.9..2.1V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
2V0C	-	ZMM2V0C	Z-diode	1.96..2.04V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
2V0D	-	ZMM2V0D	Z-diode	1.98..2.02V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
2V2B	-	ZMM2V2B	Z-diode	2.09..2.31V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
2V2C	-	ZMM2V2C	Z-diode	2.156..2.244V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
2V2D	-	ZMM2V2D	Z-diode	2.178..2.222V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
2V4B	-	ZMM2V4B	Z-diode	2.28..2.52V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
2V4C	-	ZMM2V4C	Z-diode	2.352..2.448V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
2V4D	-	ZMM2V4D	Z-diode	2.376..2.424V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
2V7B	-	ZMM2V7B	Z-diode	2.565..2.835V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
2V7C	-	ZMM2V7C	Z-diode	2.646..2.754V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
2V7D	-	ZMM2V7D	Z-diode	2.673..2.727V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
30	bd	RKZ30-2KD	Z-diode	29.2..30.6V, Izt=2mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
30	be	RKZ30-1KD	Z-diode	28.2..29.6V, Izt=2mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
30	bf	RKZ30-3KD	Z-diode	30.2..31.6V, Izt=2mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
30A	-	GLZ30A	Z-diode	26.99..28.39V, Zzt=55 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
30A	-	TLZ30A	Z-diode	26.99..28.39V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
30B	-	GLZ30B	Z-diode	27.70..29.13V, Zzt=55 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
30B	-	TLZ30B	Z-diode	27.70..29.13V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
30B	-	ZMM30B	Z-diode	28.5..31.5V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
30C	-	GLZ30C	Z-diode	28.36..29.82V, Zzt=55 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
30C	-	TLZ30C	Z-diode	28.36..29.82V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
30C	-	ZMM30C	Z-diode	29.4..30.6V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
30D	-	GLZ30D	Z-diode	29.02..30.51V, Zzt=55 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
30D	-	TLZ30D	Z-diode	29.02..30.51V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
30D	-	ZMM30D	Z-diode	29.7..30.3V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
33	bd	RKZ33-2KD	Z-diode	32.2..33.6V, Izt=2mA, Zzt=120 Ohm, 500mW	LLD	15d	2g	Ren
33	be	RKZ33-1KD	Z-diode	31.2..32.6V, Izt=2mA, Zzt=120 Ohm, 500mW	LLD	15d	2g	Ren
33	bf	RKZ33-3KD	Z-diode	33.2..34.6V, Izt=2mA, Zzt=120 Ohm, 500mW	LLD	15d	2g	Ren
33A	-	GLZ33A	Z-diode	29.68..31.22V, Zzt=65 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
33A	-	TLZ33A	Z-diode	29.68..31.22V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
33B	-	GLZ33B	Z-diode	30.32..31.88V, Zzt=65 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
33B	-	TLZ33B	Z-diode	30.32..31.88V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
33B	-	ZMM33B	Z-diode	31.35..34.65V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
33C	-	GLZ33C	Z-diode	30.90..32.50V, Zzt=65 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
33C	-	TLZ33C	Z-diode	30.90..32.50V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
33C	-	ZMM33C	Z-diode	32.34..33.66V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
33D	-	GLZ33D	Z-diode	31.49..33.11V, Zzt=65 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
33D	-	TLZ33D	Z-diode	31.49..33.11V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
33D	-	ZMM33D	Z-diode	32.67..33.33V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
36	bd	RKZ36-2KD	Z-diode	35.3..36.8V, Izt=2mA, Zzt=140 Ohm, 500mW	LLD	15d	2g	Ren
36	be	RKZ36-1KD	Z-diode	34.2..35.7V, Izt=2mA, Zzt=140 Ohm, 500mW	LLD	15d	2g	Ren
36	bf	RKZ36-3KD	Z-diode	36.4..38.0V, Izt=2mA, Zzt=140 Ohm, 500mW	LLD	15d	2g	Ren
36A	-	GLZ36A	Z-diode	32.14..33.79V, Zzt=75 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
36A	-	TLZ36A	Z-diode	32.14..33.79V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
36B	-	GLZ36B	Z-diode	32.79..34.49V, Zzt=75 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
36B	-	TLZ36B	Z-diode	32.79..34.49V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
36B	-	ZMM36B	Z-diode	34.2..37.8V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
36C	-	GLZ36C	Z-diode	33.40..35.13V, Zzt=75 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
36C	-	TLZ36C	Z-diode	33.40..35.13V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
36C	-	ZMM36C	Z-diode	35.28..36.72V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
36D	-	GLZ36D	Z-diode	34.01..35.77V, Zzt=75 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
36D	-	TLZ36D	Z-diode	34.01..35.77V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
36D	-	ZMM36D	Z-diode	35.64..36.36V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
39A	-	GLZ39A	Z-diode	34.68..36.47V, Zzt=85 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
39A	-	TLZ39A	Z-diode	34.68..36.47V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
39B	-	GLZ39B	Z-diode	35.36..37.19V, Zzt=85 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
39B	-	TLZ39B	Z-diode	35.36..37.19V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
39B	-	ZMM39B	Z-diode	37.05..40.95V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
39C	-	GLZ39C	Z-diode	36.0..37.85V, Zzt=85 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
39C	-	TLZ39C	Z-diode	36.0..37.85V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
39C	-	ZMM39C	Z-diode	38.22..39.78V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
39D	-	GLZ39D	Z-diode	36.63..38.52V, Zzt=85 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
39D	-	TLZ39D	Z-diode	36.63..38.52V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
39D	-	ZMM39D	Z-diode	38.61..39.39V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
3A	bd	RKZ3A2KD	Z-diode	2.6..2.8V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
3A	be	RKZ3A1KD	Z-diode	2.5..2.7V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
3A	bf	RKZ3A3KD	Z-diode	2.7..2.9V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
3A0	-	GLZ3.0A	Z-diode	2.85..3.07V, Zzt=80 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
3A0	-	TLZ3.0A	Z-diode	2.85..3.07V, Izt=20mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2g	Ttr
3A3	-	GLZ3.3A	Z-diode	3.16..3.38V, Zzt=70 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
3A3	-	TLZ3.3A	Z-diode	3.16..3.38V, Izt=20mA, Zzt=70 Ohm, 500mW	SOD-80	15d	2g	Ttr
3A6	-	GLZ3.6A	Z-diode	3.46..3.70V, Zzt=60 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
3A6	-	TLZ3.6A	Z-diode	3.46..3.70V, Izt=20mA, Zzt=60 Ohm, 500mW	SOD-80	15d	2g	Ttr
3A9	-	GLZ3.9A	Z-diode	3.74..4.01V, Zzt=50 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
3A9	-	TLZ3.9A	Z-diode	3.74..4.01V, Izt=20mA, Zzt=50 Ohm, 500mW	SOD-80	15d	2g	Ttr
3B	bd	RKZ3B2KD	Z-diode	2.9..3.1V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
3B	be	RKZ3B1KD	Z-diode	2.8..3.0V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
3B	bf	RKZ3B3KD	Z-diode	3.0..3.2V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
3B0	-	GLZ3.0B	Z-diode	3.01..3.22V, Zzt=80 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
3B0	-	TLZ3.0B	Z-diode	3.01..3.22V, Izt=20mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2g	Ttr
3B3	-	GLZ3.3B	Z-diode	3.32..3.53V, Zzt=70 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
3B3	-	TLZ3.3B	Z-diode	3.32..3.53V, Izt=20mA, Zzt=70 Ohm, 500mW	SOD-80	15d	2g	Ttr
3B6	-	GLZ3.6B	Z-diode	3.60..3.85V, Zzt=60 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
3B6	-	TLZ3.6B	Z-diode	3.60..3.85V, Izt=20mA, Zzt=60 Ohm, 500mW	SOD-80	15d	2g	Ttr
3B9	-	GLZ3.9B	Z-diode	3.89..4.16V, Zzt=50 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
3B9	-	TLZ3.9B	Z-diode	3.89..4.16V, Izt=20mA, Zzt=50 Ohm, 500mW	SOD-80	15d	2g	Ttr
3C	bd	RKZ3C2KD	Z-diode	3.2..3.4V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
3C	be	RKZ3C1KD	Z-diode	3.1..3.3V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
3C	bf	RKZ3C3KD	Z-diode	3.3..3.5V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
3V0B	-	ZMM3V0B	Z-diode	2.85..3.15V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
3V0C	-	ZMM3V0C	Z-diode	2.94..3.06V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
3V0D	-	ZMM3V0D	Z-diode	2.97..3.03V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
3V3B	-	ZMM3V3B	Z-diode	3.135..3.465V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
3V3C	-	ZMM3V3C	Z-diode	3.234..3.366V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
3V3D	-	ZMM3V3D	Z-diode	3.267..3.333V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
3V6B	-	ZMM3V6B	Z-diode	3.42..3.78V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
3V6C	-	ZMM3V6C	Z-diode	3.528..3.672V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
3V6D	-	ZMM3V6D	Z-diode	3.564..3.636V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
3V9B	-	ZMM3V9B	Z-diode	3.705..4.095V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
3V9C	-	ZMM3V9C	Z-diode	3.822..3.978V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
3V9D	-	ZMM3V9D	Z-diode	3.861..3.939V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
43	-	GLZ43	Z-diode	40.0..45.00V, Zzt=90 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
43	-	TLZ43	Z-diode	40.0..45.0V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
43B	-	ZMM43B	Z-diode	40.85..45.15V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
43C	-	ZMM43C	Z-diode	42.14..43.86V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
43D	-	ZMM43D	Z-diode	42.57..43.43V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
45APH	-	BAS45AL	Si-diode	Switching, 125V, 250mA, 400mW, Vf<1V(100mA), 4pF	SOD-80C	15d	2c	Phi
47	-	GLZ47	Z-diode	44.0..49.00V, Zzt=90 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
47	-	TLZ47	Z-diode	44.0..49.0V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
47B	-	ZMM47B	Z-diode	44.65..49.35V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
47C	-	ZMM47C	Z-diode	46.06..47.94V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
47D	-	ZMM47D	Z-diode	46.53..47.47V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
4A	bd	RKZ4A2KD	Z-diode	3.5..3.7V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
4A	be	RKZ4A1KD	Z-diode	3.4..3.6V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
4A	bf	RKZ4A3KD	Z-diode	3.6..3.8V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
4A3	-	GLZ4.3A	Z-diode	4.04..4.29V, Zzt=40 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
4A3	-	TLZ4.3A	Z-diode	4.04..4.29V, Izt=20mA, Zzt=40 Ohm, 500mW	SOD-80	15d	2g	Ttr
4A7	-	GLZ4.7A	Z-diode	4.44..4.68V, Zzt=25 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
4A7	-	TLZ4.7A	Z-diode	4.44..4.68V, Izt=20mA, Zzt=25 Ohm, 500mW	SOD-80	15d	2g	Ttr
4B	bd	RKZ4B2KD	Z-diode	3.8..4.0V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
4B	be	RKZ4B1KD	Z-diode	3.7..3.9V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
4B	bf	RKZ4B3KD	Z-diode	3.9..4.1V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
4B3	-	GLZ4.3B	Z-diode	4.17..4.43V, Zzt=40 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
4B3	-	TLZ4.3B	Z-diode	4.17..4.43V, Izt=20mA, Zzt=40 Ohm, 500mW	SOD-80	15d	2g	Ttr
4B7	-	GLZ4.7B	Z-diode	4.55..4.80V, Zzt=25 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
4B7	-	TLZ4.7B	Z-diode	4.55..4.80V, Izt=20mA, Zzt=25 Ohm, 500mW	SOD-80	15d	2g	Ttr
4C	bd	RKZ4C2KD	Z-diode	4.1..4.3V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
4C	be	RKZ4C1KD	Z-diode	4.0..4.2V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
4C	bf	RKZ4C3KD	Z-diode	4.2..4.4V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
4C3	-	GLZ4.3C	Z-diode	4.30..4.57V, Zzt=40 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
4C3	-	TLZ4.3C	Z-diode	4.30..4.57V, Izt=20mA, Zzt=40 Ohm, 500mW	SOD-80	15d	2g	Ttr
4C7	-	GLZ4.7C	Z-diode	4.68..4.93V, Zzt=25 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
4C7	-	TLZ4.7C	Z-diode	4.68..4.93V, Izt=20mA, Zzt=25 Ohm, 500mW	SOD-80	15d	2g	Ttr
4V3B	-	ZMM4V3B	Z-diode	4.085..4.515V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
4V3C	-	ZMM4V3C	Z-diode	4.214..4.386V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
4V3D	-	ZMM4V3D	Z-diode	4.257..4.343V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
4V7B	-	ZMM4V7B	Z-diode	4.465..4.935V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
4V7C	-	ZMM4V7C	Z-diode	4.606..4.794V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
4V7D	-	ZMM4V7D	Z-diode	4.653..4.747V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
51	-	GLZ51	Z-diode	48.0..54.00V, Zzt=110 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
51	-	TLZ51	Z-diode	48.0..54.0V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
51B	-	ZMM51B	Z-diode	48.45..53.55V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
51C	-	ZMM51C	Z-diode	49.98..52.02V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
51D	-	ZMM51D	Z-diode	50.49..51.51V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
5221	-	MMGZ5221BPT	Z-diode	2.280..2.520V, Izt=20mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2c	Chm
5221	-	ZMM5221B	Z-diode	2.28..2.52V, Izt=20mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2h	Ttr
5222	-	MMGZ5222BPT	Z-diode	2.375..2.625V, Izt=20mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2c	Chm
5222	-	ZMM5222B	Z-diode	2.38..2.63V, Izt=20mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2h	Ttr
5223	-	MMGZ5223BPT	Z-diode	2.565..2.835V, Izt=20mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2c	Chm
5223	-	ZMM5223B	Z-diode	2.57..2.84V, Izt=20mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2h	Ttr
5224	-	MMGZ5224BPT	Z-diode	2.660..2.940V, Izt=20mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2c	Chm
5224	-	ZMM5224B	Z-diode	2.66..2.94V, Izt=20mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2h	Ttr
5225	-	MMGZ5225BPT	Z-diode	2.850..3.150V, Izt=20mA, Zzt=29 Ohm, 500mW	SOD-80	15d	2c	Chm
5225	-	ZMM5225B	Z-diode	2.85..3.15V, Izt=20mA, Zzt=29 Ohm, 500mW	SOD-80	15d	2h	Ttr
5226	-	MMGZ5226BPT	Z-diode	3.135..3.465V, Izt=20mA, Zzt=28 Ohm, 500mW	SOD-80	15d	2c	Chm
5226	-	ZMM5226B	Z-diode	3.14..3.47V, Izt=20mA, Zzt=28 Ohm, 500mW	SOD-80	15d	2h	Ttr
5227	-	MMGZ5227BPT	Z-diode	3.420..3.780V, Izt=20mA, Zzt=24 Ohm, 500mW	SOD-80	15d	2c	Chm
5227	-	ZMM5227B	Z-diode	3.42..3.78V, Izt=20mA, Zzt=24 Ohm, 500mW	SOD-80	15d	2h	Ttr
5228	-	MMGZ5228BPT	Z-diode	3.705..4.095V, Izt=20mA, Zzt=23 Ohm, 500mW	SOD-80	15d	2c	Chm
5228	-	ZMM5228B	Z-diode	3.71..4.10V, Izt=20mA, Zzt=23 Ohm, 500mW	SOD-80	15d	2h	Ttr
5229	-	MMGZ5229BPT	Z-diode	4.085..4.515V, Izt=20mA, Zzt=22 Ohm, 500mW	SOD-80	15d	2c	Chm
5229	-	ZMM5229B	Z-diode	4.09..4.52V, Izt=20mA, Zzt=22 Ohm, 500mW	SOD-80	15d	2h	Ttr
5230	-	MMGZ5230BPT	Z-diode	4.465..4.935V, Izt=20mA, Zzt=19 Ohm, 500mW	SOD-80	15d	2c	Chm
5230	-	ZMM5230B	Z-diode	4.47..4.94V, Izt=20mA, Zzt=19 Ohm, 500mW	SOD-80	15d	2h	Ttr
5231	-	MMGZ5231BPT	Z-diode	4.845..5.355V, Izt=20mA, Zzt=17 Ohm, 500mW	SOD-80	15d	2c	Chm
5231	-	ZMM5231B	Z-diode	4.85..5.36V, Izt=20mA, Zzt=17 Ohm, 500mW	SOD-80	15d	2h	Ttr
5232	-	MMGZ5232BPT	Z-diode	5.320..5.880V, Izt=20mA, Zzt=11 Ohm, 500mW	SOD-80	15d	2c	Chm
5232	-	ZMM5232B	Z-diode	5.32..5.88V, Izt=20mA, Zzt=11 Ohm, 500mW	SOD-80	15d	2h	Ttr
5233	-	MMGZ5233BPT	Z-diode	5.700..6.300V, Izt=20mA, Zzt=7 Ohm, 500mW	SOD-80	15d	2c	Chm
5233	-	ZMM5233B	Z-diode	5.70..6.30V, Izt=20mA, Zzt=7 Ohm, 500mW	SOD-80	15d	2h	Ttr
5234	-	MMGZ5234BPT	Z-diode	5.890..6.510V, Izt=20mA, Zzt=7 Ohm, 500mW	SOD-80	15d	2c	Chm
5234	-	ZMM5234B	Z-diode	5.89..6.51V, Izt=20mA, Zzt=7 Ohm, 500mW	SOD-80	15d	2h	Ttr
5235	-	MMGZ5235BPT	Z-diode	6.460..7.140V, Izt=20mA, Zzt=5 Ohm, 500mW	SOD-80	15d	2c	Chm
5235	-	ZMM5235B	Z-diode	6.46..7.14V, Izt=20mA, Zzt=5 Ohm, 500mW	SOD-80	15d	2h	Ttr
5236	-	MMGZ5236BPT	Z-diode	7.125..7.875V, Izt=20mA, Zzt=6 Ohm, 500mW	SOD-80	15d	2c	Chm
5236	-	ZMM5236B	Z-diode	7.13..7.88V, Izt=20mA, Zzt=6 Ohm, 500mW	SOD-80	15d	2h	Ttr
5237	-	MMGZ5237BPT	Z-diode	7.790..8.610V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2c	Chm
5237	-	ZMM5237B	Z-diode	7.79..8.61V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2h	Ttr
5238	-	MMGZ5238BPT	Z-diode	8.265..9.135V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2c	Chm
5238	-	ZMM5238B	Z-diode	8.27..9.14V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2h	Ttr
5239	-	MMGZ5239BPT	Z-diode	8.645..9.555V, Izt=20mA, Zzt=10 Ohm, 500mW	SOD-80	15d	2c	Chm
5239	-	ZMM5239B	Z-diode	8.65..9.56V, Izt=20mA, Zzt=10 Ohm, 500mW	SOD-80	15d	2h	Ttr
5240	-	MMGZ5240BPT	Z-diode	9.500..10.50V, Izt=20mA, Zzt=17 Ohm, 500mW	SOD-80	15d	2c	Chm
5240	-	ZMM5240B	Z-diode	9.50..10.50V, Izt=20mA, Zzt=17 Ohm, 500mW	SOD-80	15d	2h	Ttr
5241	-	MMGZ5241BPT	Z-diode	10.45..11.55V, Izt=20mA, Zzt=22 Ohm, 500mW	SOD-80	15d	2c	Chm
5241	-	ZMM5241B	Z-diode	10.45..11.55V, Izt=20mA, Zzt=22 Ohm, 500mW	SOD-80	15d	2h	Ttr
5242	-	MMGZ5242BPT	Z-diode	11.40..12.60V, Izt=20mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2c	Chm
5242	-	ZMM5242B	Z-diode	11.40..12.60V, Izt=20mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2h	Ttr
5243	-	MMGZ5243BPT	Z-diode	12.35..13.65V, Izt=9.5mA, Zzt=13 Ohm, 500mW	SOD-80	15d	2c	Chm
5243	-	ZMM5243B	Z-diode	12.35..13.65V, Izt=9.5mA, Zzt=13 Ohm, 500mW	SOD-80	15d	2h	Ttr
5244	-	MMGZ5244BPT	Z-diode	13.30..14.70V, Izt=9.0mA, Zzt=15 Ohm, 500mW	SOD-80	15d	2c	Chm
5244	-	ZMM5244B	Z-diode	13.30..14.70V, Izt=9.0mA, Zzt=15 Ohm, 500mW	SOD-80	15d	2h	Ttr
5245	-	MMGZ5245BPT	Z-diode	14.25..15.75V, Izt=8.5mA, Zzt=16 Ohm, 500mW	SOD-80	15d	2c	Chm
5245	-	ZMM5245B	Z-diode	14.25..15.75V, Izt=8.5mA, Zzt=16 Ohm, 500mW	SOD-80	15d	2h	Ttr
5246	-	MMGZ5246BPT	Z-diode	15.20..16.80V, Izt=7.8mA, Zzt=17 Ohm, 500mW	SOD-80	15d	2c	Chm
5246	-	ZMM5246B	Z-diode	15.20..16.80V, Izt=7.8mA, Zzt=17 Ohm, 500mW	SOD-80	15d	2h	Ttr
5247	-	MMGZ5247BPT	Z-diode	16.15..17.85V, Izt=7.4mA, Zzt=19 Ohm, 500mW	SOD-80	15d	2c	Chm

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5247	-	ZMM5247B	Z-diode	16.15..17.85V, Izt=7.4mA, Zzt=19 Ohm, 500mW	SOD-80	15d	2h	Ttr
5248	-	MMGZ5248BPT	Z-diode	17.10..18.90V, Izt=7.0mA, Zzt=21 Ohm, 500mW	SOD-80	15d	2c	Chm
5248	-	ZMM5248B	Z-diode	17.10..18.90V, Izt=7.0mA, Zzt=21 Ohm, 500mW	SOD-80	15d	2h	Ttr
5249	-	MMGZ5249BPT	Z-diode	18.05..19.95V, Izt=6.6mA, Zzt=23 Ohm, 500mW	SOD-80	15d	2c	Chm
5249	-	ZMM5249B	Z-diode	18.05..19.95V, Izt=6.6mA, Zzt=23 Ohm, 500mW	SOD-80	15d	2h	Ttr
5250	-	MMGZ5250BPT	Z-diode	19.0..21.0V, Izt=6.2mA, Zzt=25 Ohm, 500mW	SOD-80	15d	2c	Chm
5250	-	ZMM5250B	Z-diode	19.0..21.0V, Izt=6.2mA, Zzt=25 Ohm, 500mW	SOD-80	15d	2h	Ttr
5251	-	MMGZ5251BPT	Z-diode	20.90..23.10V, Izt=5.6mA, Zzt=29 Ohm, 500mW	SOD-80	15d	2c	Chm
5251	-	ZMM5251B	Z-diode	20.90..23.10V, Izt=5.6mA, Zzt=29 Ohm, 500mW	SOD-80	15d	2h	Ttr
5252	-	MMGZ5252BPT	Z-diode	22.80..25.20V, Izt=5.2mA, Zzt=33 Ohm, 500mW	SOD-80	15d	2c	Chm
5252	-	ZMM5252B	Z-diode	22.80..25.20V, Izt=5.2mA, Zzt=33 Ohm, 500mW	SOD-80	15d	2h	Ttr
5253	-	MMGZ5253BPT	Z-diode	23.75..26.25V, Izt=5mA, Zzt=35 Ohm, 500mW	SOD-80	15d	2c	Chm
5253	-	ZMM5253B	Z-diode	23.75..26.25V, Izt=5.0mA, Zzt=35 Ohm, 500mW	SOD-80	15d	2h	Ttr
5254	-	MMGZ5254BPT	Z-diode	25.65..28.35V, Izt=4.6mA, Zzt=41 Ohm, 500mW	SOD-80	15d	2c	Chm
5254	-	ZMM5254B	Z-diode	25.65..28.35V, Izt=4.6mA, Zzt=41 Ohm, 500mW	SOD-80	15d	2h	Ttr
5255	-	MMGZ5255BPT	Z-diode	26.60..29.40V, Izt=4.5mA, Zzt=44 Ohm, 500mW	SOD-80	15d	2c	Chm
5255	-	ZMM5255B	Z-diode	26.60..29.40V, Izt=4.5mA, Zzt=44 Ohm, 500mW	SOD-80	15d	2h	Ttr
5256	-	MMGZ5256BPT	Z-diode	28.50..31.50V, Izt=4.2mA, Zzt=49 Ohm, 500mW	SOD-80	15d	2c	Chm
5256	-	ZMM5256B	Z-diode	28.50..31.50V, Izt=4.2mA, Zzt=49 Ohm, 500mW	SOD-80	15d	2h	Ttr
5257	-	MMGZ5257BPT	Z-diode	31.35..34.65V, Izt=3.8mA, Zzt=58 Ohm, 500mW	SOD-80	15d	2c	Chm
5257	-	ZMM5257B	Z-diode	31.35..34.65V, Izt=3.8mA, Zzt=58 Ohm, 500mW	SOD-80	15d	2h	Ttr
5258	-	MMGZ5258BPT	Z-diode	34.20..37.80V, Izt=3.4mA, Zzt=70 Ohm, 500mW	SOD-80	15d	2c	Chm
5258	-	ZMM5258B	Z-diode	34.20..37.80V, Izt=3.4mA, Zzt=70 Ohm, 500mW	SOD-80	15d	2h	Ttr
5259	-	MMGZ5259BPT	Z-diode	37.05..40.95V, Izt=3.2mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2c	Chm
5259	-	ZMM5259B	Z-diode	37.05..40.95V, Izt=3.2mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2h	Ttr
5260	-	MMGZ5260BPT	Z-diode	40.85..45.15V, Izt=3.0mA, Zzt=93 Ohm, 500mW	SOD-80	15d	2c	Chm
5260	-	ZMM5260B	Z-diode	40.85..45.15V, Izt=3.0mA, Zzt=93 Ohm, 500mW	SOD-80	15d	2h	Ttr
5261	-	MMGZ5261BPT	Z-diode	44.65..49.35V, Izt=2.7mA, Zzt=105 Ohm, 500mW	SOD-80	15d	2c	Chm
5261	-	ZMM5261B	Z-diode	44.65..49.35V, Izt=2.7mA, Zzt=105 Ohm, 500mW	SOD-80	15d	2h	Ttr
5262	-	MMGZ5262BPT	Z-diode	48.45..53.35V, Izt=2.5mA, Zzt=125 Ohm, 500mW	SOD-80	15d	2c	Chm
5262	-	ZMM5262B	Z-diode	48.45..53.55V, Izt=2.5mA, Zzt=125 Ohm, 500mW	SOD-80	15d	2h	Ttr
5263	-	MMGZ5263BPT	Z-diode	53.20..58.80V, Izt=2.2mA, Zzt=150 Ohm, 500mW	SOD-80	15d	2c	Chm
5263	-	ZMM5263B	Z-diode	53.2..58.80V, Izt=2.2mA, Zzt=150 Ohm, 500mW	SOD-80	15d	2h	Ttr
5264	-	MMGZ5264BPT	Z-diode	57.0..63.0V, Izt=2.1mA, Zzt=170 Ohm, 500mW	SOD-80	15d	2c	Chm
5264	-	ZMM5264B	Z-diode	57.0..63.0V, Izt=2.1mA, Zzt=170 Ohm, 500mW	SOD-80	15d	2h	Ttr
5265	-	MMGZ5265BPT	Z-diode	58.90..65.10V, Izt=2mA, Zzt=185 Ohm, 500mW	SOD-80	15d	2c	Chm
5265	-	ZMM5265B	Z-diode	58.90..65.10V, Izt=2.0mA, Zzt=185 Ohm, 500mW	SOD-80	15d	2h	Ttr
5266	-	MMGZ5266BPT	Z-diode	64.60..71.40V, Izt=1.8mA, Zzt=230 Ohm, 500mW	SOD-80	15d	2c	Chm
5266	-	ZMM5266B	Z-diode	64.60..71.40V, Izt=1.8mA, Zzt=230 Ohm, 500mW	SOD-80	15d	2h	Ttr
5267	-	MMGZ5267BPT	Z-diode	71.25..78.75V, Izt=1.7mA, Zzt=270 Ohm, 500mW	SOD-80	15d	2c	Chm
5267	-	ZMM5267B	Z-diode	71.25..78.75V, Izt=1.7mA, Zzt=270 Ohm, 500mW	SOD-80	15d	2h	Ttr
5268	-	MMGZ5268BPT	Z-diode	77.90..86.10V, Izt=1.5mA, Zzt=330 Ohm, 500mW	SOD-80	15d	2c	Chm
5269	-	MMGZ5269BPT	Z-diode	82.65..91.35V, Izt=1.4mA, Zzt=370 Ohm, 500mW	SOD-80	15d	2c	Chm
5270	-	MMGZ5270SPT	Z-diode	89.18..92.82V, Izt=1.4mA, Zzt=400 Ohm, 500mW	SOD-80	15d	2c	Chm
56	-	GLZ56	Z-diode	53.0..60.00V, Zzt=110 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
56	-	TLZ56	Z-diode	53.0..60.0V, Izt=5mA, 500mW	SOD-80	15d	2g	Ttr
56B	-	ZMM56B	Z-diode	53.2..58.8 5V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
56C	-	ZMM56C	Z-diode	54.88..57.12V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
56D	-	ZMM56D	Z-diode	55.44..56.56V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
5A	bd	RKZ5A2KD	Z-diode	4.4..4.6V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
5A	be	RKZ5A1KD	Z-diode	4.3..4.5V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
5A	bf	RKZ5A3KD	Z-diode	4.5..4.7V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
5A1	-	GLZ5.1A	Z-diode	4.81..5.07V, Zzt=20 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
5A1	-	TLZ5.1A	Z-diode	4.81..5.07V, Izt=20mA, Zzt=20 Ohm, 500mW	SOD-80	15d	2g	Ttr
5A6	-	GLZ5.6A	Z-diode	5.28..5.55V, Zzt=13 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
5A6	-	TLZ5.6A	Z-diode	5.28..5.55V, Izt=20mA, Zzt=13 Ohm, 500mW	SOD-80	15d	2g	Ttr
5B	bd	RKZ5B2KD	Z-diode	4.7..4.9V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
5B	be	RKZ5B1KD	Z-diode	4.6..4.8V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
5B	bf	RKZ5B3KD	Z-diode	4.8..5.0V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
5B1	-	GLZ5.1B	Z-diode	4.94..5.20V, Zzt=20 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
5B1	-	TLZ5.1B	Z-diode	4.94..5.20V, Izt=20mA, Zzt=20 Ohm, 500mW	SOD-80	15d	2g	Ttr
5B6	-	GLZ5.6B	Z-diode	5.45..5.73V, Zzt=13 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
5B6	-	TLZ5.6B	Z-diode	5.45..5.73V, Izt=20mA, Zzt=13 Ohm, 500mW	SOD-80	15d	2g	Ttr
5C	bd	RKZ5C2KD	Z-diode	5.0..5.2V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
5C	be	RKZ5C1KD	Z-diode	4.9..5.1V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
5C	bf	RKZ5C3KD	Z-diode	5.1..5.3V, Izt=5mA, Zzt=100 Ohm, 500mW	LLD	15d	2g	Ren
5C1	-	GLZ5.1C	Z-diode	5.09..5.37V, Zzt=20 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
5C1	-	TLZ5.1C	Z-diode	5.09..5.37V, Izt=20mA, Zzt=20 Ohm, 500mW	SOD-80	15d	2g	Ttr
5C6	-	GLZ5.6C	Z-diode	5.61..5.91V, Zzt=13 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
5C6	-	TLZ5.6C	Z-diode	5.61..5.91V, Izt=20mA, Zzt=13 Ohm, 500mW	SOD-80	15d	2g	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
5V1B	-	ZMM5V1B	Z-diode	4.845..5.355V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
5V1C	-	ZMM5V1C	Z-diode	4.998..5.202V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
5V1D	-	ZMM5V1D	Z-diode	5.049..5.151V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
5V6B	-	ZMM5V6B	Z-diode	5.32..5.88V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
5V6C	-	ZMM5V6C	Z-diode	5.488..5.712V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
5V6D	-	ZMM5V6D	Z-diode	5.544..5.656V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
6A	bd	RKZ6A2KD	Z-diode	5.3..5.6V, Izt=5mA, Zzt=40 Ohm, 500mW	LLD	15d	2g	Ren
6A	be	RKZ6A1KD	Z-diode	5.2..5.5V, Izt=5mA, Zzt=40 Ohm, 500mW	LLD	15d	2g	Ren
6A	bf	RKZ6A3KD	Z-diode	5.4..5.7V, Izt=5mA, Zzt=40 Ohm, 500mW	LLD	15d	2g	Ren
6A2	-	GLZ6.2A	Z-diode	5.78..6.09V, Zzt=10 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
6A2	-	TLZ6.2A	Z-diode	5.78..6.09V, Izt=20mA, Zzt=10 Ohm, 500mW	SOD-80	15d	2g	Ttr
6A8	-	GLZ6.8A	Z-diode	6.29..6.63V, Zzt=8 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
6A8	-	TLZ6.8A	Z-diode	6.29..6.63V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2g	Ttr
6B	bd	RKZ6B2KD	Z-diode	5.6..5.9V, Izt=5mA, Zzt=40 Ohm, 500mW	LLD	15d	2g	Ren
6B	be	RKZ6B1KD	Z-diode	5.5..5.8V, Izt=5mA, Zzt=40 Ohm, 500mW	LLD	15d	2g	Ren
6B	bf	RKZ6B3KD	Z-diode	5.7..6.0V, Izt=5mA, Zzt=40 Ohm, 500mW	LLD	15d	2g	Ren
6B2	-	GLZ6.2B	Z-diode	5.96..6.27V, Zzt=10 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
6B2	-	TLZ6.2B	Z-diode	5.96..6.27V, Izt=20mA, Zzt=10 Ohm, 500mW	SOD-80	15d	2g	Ttr
6B8	-	GLZ6.8B	Z-diode	6.49..6.83V, Zzt=8 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
6B8	-	TLZ6.8B	Z-diode	6.49..6.83V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2g	Ttr
6C	bd	RKZ6C2KD	Z-diode	6.0..6.3V, Izt=5mA, Zzt=40 Ohm, 500mW	LLD	15d	2g	Ren
6C	be	RKZ6C1KD	Z-diode	5.8..6.1V, Izt=5mA, Zzt=40 Ohm, 500mW	LLD	15d	2g	Ren
6C	bf	RKZ6C3KD	Z-diode	6.1..6.4V, Izt=5mA, Zzt=40 Ohm, 500mW	LLD	15d	2g	Ren
6C2	-	GLZ6.2C	Z-diode	6.12..6.44V, Zzt=10 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
6C2	-	TLZ6.2C	Z-diode	6.12..6.44V, Izt=20mA, Zzt=10 Ohm, 500mW	SOD-80	15d	2g	Ttr
6C8	-	GLZ6.8C	Z-diode	6.66..7.01V, Zzt=8 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
6C8	-	TLZ6.8C	Z-diode	6.66..7.01V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2g	Ttr
6V2B	-	ZMM6V2B	Z-diode	5.89..6.51V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
6V2C	-	ZMM6V2C	Z-diode	6.076..6.324V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
6V2D	-	ZMM6V2D	Z-diode	6.138..6.262V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
6V8B	-	ZMM6V8B	Z-diode	6.46..7.14V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
6V8C	-	ZMM6V8C	Z-diode	6.664..6.936V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
6V8D	-	ZMM6V8D	Z-diode	6.732..6.868V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
7A	bd	RKZ7A2KD	Z-diode	6.4..6.7V, Izt=5mA, Zzt=15 Ohm, 500mW	LLD	15d	2g	Ren
7A	be	RKZ7A1KD	Z-diode	6.3..6.6V, Izt=5mA, Zzt=15 Ohm, 500mW	LLD	15d	2g	Ren
7A	bf	RKZ7A3KD	Z-diode	6.6..6.9V, Izt=5mA, Zzt=15 Ohm, 500mW	LLD	15d	2g	Ren
7A5	-	GLZ7.5A	Z-diode	6.85..7.22V, Zzt=8 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
7A5	-	TLZ7.5A	Z-diode	6.85..7.22V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2g	Ttr
7B	bd	RKZ7B2KD	Z-diode	6.9..7.2V, Izt=5mA, Zzt=15 Ohm, 500mW	LLD	15d	2g	Ren
7B	be	RKZ7B1KD	Z-diode	6.7..7.0V, Izt=5mA, Zzt=15 Ohm, 500mW	LLD	15d	2g	Ren
7B	bf	RKZ7B3KD	Z-diode	7.0..7.3V, Izt=5mA, Zzt=15 Ohm, 500mW	LLD	15d	2g	Ren
7B5	-	GLZ7.5B	Z-diode	7.07..7.45V, Zzt=8 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
7B5	-	TLZ7.5B	Z-diode	7.07..7.45V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2g	Ttr
7C	bd	RKZ7C2KD	Z-diode	7.3..7.7V, Izt=5mA, Zzt=15 Ohm, 500mW	LLD	15d	2g	Ren
7C	be	RKZ7C1KD	Z-diode	7.2..7.6V, Izt=5mA, Zzt=15 Ohm, 500mW	LLD	15d	2g	Ren
7C	bf	RKZ7C3KD	Z-diode	7.5..7.9V, Izt=5mA, Zzt=15 Ohm, 500mW	LLD	15d	2g	Ren
7C5	-	GLZ7.5C	Z-diode	7.29..7.67V, Zzt=8 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
7C5	-	TLZ7.5C	Z-diode	7.29..7.67V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2g	Ttr
7V5B	-	ZMM7V5B	Z-diode	7.125..7.875V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
7V5C	-	ZMM7V5C	Z-diode	7.35..7.65V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
7V5D	-	ZMM7V5D	Z-diode	7.425..7.575V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
8A2	-	GLZ8.2A	Z-diode	7.53..7.92V, Zzt=8 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
8A2	-	TLZ8.2A	Z-diode	7.53..7.92V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2g	Ttr
8B2	-	GLZ8.2B	Z-diode	7.78..8.19V, Zzt=8 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
8B2	-	TLZ8.2B	Z-diode	7.78..8.19V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2g	Ttr
8C2	-	GLZ8.2C	Z-diode	8.03..8.45V, Zzt=8 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
8C2	-	TLZ8.2C	Z-diode	8.03..8.45V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2g	Ttr
8V2B	-	ZMM8V2B	Z-diode	7.79..8.61V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
8V2C	-	ZMM8V2C	Z-diode	8.036..8.364V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
8V2D	-	ZMM8V2D	Z-diode	8.118..8.282V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
9A	bd	RKZ9A2KD	Z-diode	7.9..8.3V, Izt=5mA, Zzt=20 Ohm, 500mW	LLD	15d	2g	Ren
9A	be	RKZ9A1KD	Z-diode	7.7..8.1V, Izt=5mA, Zzt=20 Ohm, 500mW	LLD	15d	2g	Ren
9A	bf	RKZ9A3KD	Z-diode	8.1..8.5V, Izt=5mA, Zzt=20 Ohm, 500mW	LLD	15d	2g	Ren
9A1	-	GLZ9.1A	Z-diode	8.29..8.73V, Zzt=8 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
9A1	-	TLZ9.1A	Z-diode	8.29..8.73V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2g	Ttr
9B	bd	RKZ9B2KD	Z-diode	8.5..8.9V, Izt=5mA, Zzt=20 Ohm, 500mW	LLD	15d	2g	Ren
9B	be	RKZ9B1KD	Z-diode	8.3..8.7V, Izt=5mA, Zzt=20 Ohm, 500mW	LLD	15d	2g	Ren
9B	bf	RKZ9B3KD	Z-diode	8.7..9.1V, Izt=5mA, Zzt=20 Ohm, 500mW	LLD	15d	2g	Ren
9B1	-	GLZ9.1B	Z-diode	8.57..9.01V, Zzt=8 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
9B1	-	TLZ9.1B	Z-diode	8.57..9.01V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2g	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
9C	bd	RKZ9C2KD	Z-diode	9.1..9.5V, Izt=5mA, Zzt=20 Ohm, 500mW	LLD	15d	2g	Ren
9C	be	RKZ9C1KD	Z-diode	8.9..9.3V, Izt=5mA, Zzt=20 Ohm, 500mW	LLD	15d	2g	Ren
9C	bf	RKZ9C3KD	Z-diode	9.3..9.7V, Izt=5mA, Zzt=20 Ohm, 500mW	LLD	15d	2g	Ren
9C1	-	GLZ9.1C	Z-diode	8.83..9.30V, Zzt=8 Ohm, Izt=20mA, 500mW	SOD-80	15d	2c	Pjt
9C1	-	TLZ9.1C	Z-diode	8.83..9.30V, Izt=20mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2g	Ttr
9V1B	-	ZMM9V1B	Z-diode	8.645..9.555V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
9V1C	-	ZMM9V1C	Z-diode	8.918..9.282V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
9V1D	-	ZMM9V1D	Z-diode	9.009..9.191V, Izt=5mA, 500mW	LL-34	15d	2c	Lrc
AA	bd	RKZ11A2KD	Z-diode	9.7..10.1V, Izt=5mA, Zzt=25 Ohm, 500mW	LLD	15d	2g	Ren
AA	be	RKZ11A1KD	Z-diode	9.5..9.9V, Izt=5mA, Zzt=25 Ohm, 500mW	LLD	15d	2g	Ren
AA	bf	RKZ11A3KD	Z-diode	9.9..10.3V, Izt=5mA, Zzt=25 Ohm, 500mW	LLD	15d	2g	Ren
AB	bd	RKZ11B2KD	Z-diode	10.4..10.8V, Izt=5mA, Zzt=25 Ohm, 500mW	LLD	15d	2g	Ren
AB	be	RKZ11B1KD	Z-diode	10.2..10.6V, Izt=5mA, Zzt=25 Ohm, 500mW	LLD	15d	2g	Ren
AB	bf	RKZ11B3KD	Z-diode	10.7..11.1V, Izt=5mA, Zzt=25 Ohm, 500mW	LLD	15d	2g	Ren
AC	bd	RKZ11C2KD	Z-diode	11.1..11.6V, Izt=5mA, Zzt=25 Ohm, 500mW	LLD	15d	2g	Ren
AC	be	RKZ11C1KD	Z-diode	10.9..11.3V, Izt=5mA, Zzt=25 Ohm, 500mW	LLD	15d	2g	Ren
AC	bf	RKZ11C3KD	Z-diode	11.4..11.9V, Izt=5mA, Zzt=25 Ohm, 500mW	LLD	15d	2g	Ren
BA	bd	RKZ12A2KD	Z-diode	11.9..12.4V, Izt=5mA, Zzt=35 Ohm, 500mW	LLD	15d	2g	Ren
BA	be	RKZ12A1KD	Z-diode	11.6..12.1V, Izt=5mA, Zzt=35 Ohm, 500mW	LLD	15d	2g	Ren
BA	bf	RKZ12A3KD	Z-diode	12.2..12.7V, Izt=5mA, Zzt=35 Ohm, 500mW	LLD	15d	2g	Ren
BB	bd	RKZ12B2KD	Z-diode	12.6..13.1V, Izt=5mA, Zzt=35 Ohm, 500mW	LLD	15d	2g	Ren
BB	be	RKZ12B1KD	Z-diode	12.4..12.9V, Izt=5mA, Zzt=35 Ohm, 500mW	LLD	15d	2g	Ren
BB	bf	RKZ12B3KD	Z-diode	12.9..13.4V, Izt=5mA, Zzt=35 Ohm, 500mW	LLD	15d	2g	Ren
BC	bd	RKZ12C2KD	Z-diode	13.5..14.0V, Izt=5mA, Zzt=35 Ohm, 500mW	LLD	15d	2g	Ren
BC	be	RKZ12C1KD	Z-diode	13.2..13.7V, Izt=5mA, Zzt=35 Ohm, 500mW	LLD	15d	2g	Ren
BC	bf	RKZ12C3KD	Z-diode	13.8..14.3V, Izt=5mA, Zzt=35 Ohm, 500mW	LLD	15d	2g	Ren
C100	-	ZMM100	Z-diode	100V, Izt=5mA, Zzt=450 Ohm, 500mW	SOD-80	15d	2h	Ttr
C100	-	ZMMC100	Z-diode	94..106V, Izt=5mA, Zzt=450 Ohm, 500mW	SOD-80	15d	2h	Ttr
C10V	-	ZMM10	Z-diode	10V± 5%, Izt=5mA, Zzt=15 Ohm, 500mW	SOD-80	15d	2h	Ttr
C10V	-	ZMM55-C10	Z-diode	9.40..10.60V, Zzt=15 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C10V	-	ZMMC10	Z-diode	9.4..10.6V, Izt=5mA, Zzt=15 Ohm, 500mW	SOD-80	15d	2h	Ttr
C11V	-	ZMM11	Z-diode	11V± 5%, Izt=5mA, Zzt=20 Ohm, 500mW	SOD-80	15d	2h	Ttr
C11V	-	ZMM55-C11	Z-diode	10.40..11.60V, Zzt=20 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C11V	-	ZMMC11	Z-diode	10.4..11.6V, Izt=5mA, Zzt=20 Ohm, 500mW	SOD-80	15d	2h	Ttr
C12V	-	ZMM12	Z-diode	12V± 5%, Izt=5mA, Zzt=20 Ohm, 500mW	SOD-80	15d	2h	Ttr
C12V	-	ZMM55-C12	Z-diode	11.40..12.70V, Zzt=20 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C12V	-	ZMMC12	Z-diode	11.4..12.7V, Izt=5mA, Zzt=20 Ohm, 500mW	SOD-80	15d	2h	Ttr
C13V	-	ZMM13	Z-diode	13V± 5%, Izt=5mA, Zzt=26 Ohm, 500mW	SOD-80	15d	2h	Ttr
C13V	-	ZMM55-C13	Z-diode	12.40..14.10V, Zzt=26 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C13V	-	ZMMC13	Z-diode	12.4..14.1V, Izt=5mA, Zzt=26 Ohm, 500mW	SOD-80	15d	2h	Ttr
C15V	-	ZMM15	Z-diode	15V± 5%, Izt=5mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2h	Ttr
C15V	-	ZMM55-C15	Z-diode	13.80..15.60V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C15V	-	ZMMC15	Z-diode	13.8..15.6V, Izt=5mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2h	Ttr
C16V	-	ZMM16	Z-diode	16V± 5%, Izt=5mA, Zzt=40 Ohm, 500mW	SOD-80	15d	2h	Ttr
C16V	-	ZMM55-C16	Z-diode	15.30..17.10V, Zzt=40 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C16V	-	ZMMC16	Z-diode	15.3..17.1V, Izt=5mA, Zzt=40 Ohm, 500mW	SOD-80	15d	2h	Ttr
C18V	-	ZMM18	Z-diode	18V± 5%, Izt=5mA, Zzt=50 Ohm, 500mW	SOD-80	15d	2h	Ttr
C18V	-	ZMM55-C18	Z-diode	16.80..19.10V, Zzt=50 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C18V	-	ZMMC18	Z-diode	16.8..19.1V, Izt=5mA, Zzt=50 Ohm, 500mW	SOD-80	15d	2h	Ttr
C20V	-	ZMM20	Z-diode	20V± 5%, Izt=5mA, Zzt=55 Ohm, 500mW	SOD-80	15d	2h	Ttr
C20V	-	ZMM55-C20	Z-diode	18.80..21.20V, Zzt=55 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C20V	-	ZMMC20	Z-diode	18.8..21.2V, Izt=5mA, Zzt=55 Ohm, 500mW	SOD-80	15d	2h	Ttr
C22V	-	ZMM22	Z-diode	22V± 5%, Izt=5mA, Zzt=55 Ohm, 500mW	SOD-80	15d	2h	Ttr
C22V	-	ZMM55-C22	Z-diode	20.80..23.30V, Zzt=55 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C22V	-	ZMMC22	Z-diode	20.8..23.3V, Izt=5mA, Zzt=55 Ohm, 500mW	SOD-80	15d	2h	Ttr
C24V	-	ZMM24	Z-diode	24V± 5%, Izt=5mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2h	Ttr
C24V	-	ZMM55-C24	Z-diode	22.80..25.60V, Zzt=80 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C24V	-	ZMMC24	Z-diode	22.8..25.6V, Izt=5mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2h	Ttr
C27V	-	ZMM27	Z-diode	27V± 5%, Izt=5mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2h	Ttr
C27V	-	ZMM55-C27	Z-diode	25.10..28.90V, Zzt=80 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C27V	-	ZMMC27	Z-diode	25.1..28.9V, Izt=5mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2h	Ttr
C2V4	-	ZMM2V4	Z-diode	2.4V± 5%, Izt=5mA, Zzt=85 Ohm, 500mW	SOD-80	15d	2h	Ttr
C2V4	-	ZMM55-C2V4	Z-diode	2.28..2.56V, Zzt=85 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C2V4	-	ZMMC2V4	Z-diode	2.28..2.56V, Izt=5mA, Zzt=85 Ohm, 500mW	SOD-80	15d	2h	Ttr
C2V7	-	ZMM2V7	Z-diode	2.4V± 5%, Izt=5mA, Zzt=85 Ohm, 500mW	SOD-80	15d	2h	Ttr
C2V7	-	ZMM55-C2V7	Z-diode	2.50..2.90V, Zzt=85 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C2V7	-	ZMMC2V7	Z-diode	2.5..2.9V, Izt=5mA, Zzt=85 Ohm, 500mW	SOD-80	15d	2h	Ttr
C30V	-	ZMM30	Z-diode	30V± 5%, Izt=5mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2h	Ttr
C30V	-	ZMM55-C30	Z-diode	28.0..32.00V, Zzt=80 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C30V	-	ZMMC30	Z-diode	28..32V, Izt=5mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2h	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
C33V	-	ZMM33	Z-diode	33V± 5%, Izt=5mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2h	Ttr
C33V	-	ZMM55-C33	Z-diode	31.0..35.00V, Zzt=80 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C33V	-	ZMMC33	Z-diode	31..35V, Izt=5mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2h	Ttr
C36V	-	ZMM36	Z-diode	36V± 5%, Izt=5mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2h	Ttr
C36V	-	ZMM55-C36	Z-diode	34.0..38.00V, Zzt=80 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C36V	-	ZMMC36	Z-diode	34..38V, Izt=5mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2h	Ttr
C39V	-	ZMM39	Z-diode	39V± 5%, Izt=5mA, Zzt=90 Ohm, 500mW	SOD-80	15d	2h	Ttr
C39V	-	ZMM55-C39	Z-diode	37.0..41.00V, Zzt=90 Ohm, Izt=2.5mA, 500mW	SOD-80	15d	2c	Pjt
C39V	-	ZMMC39	Z-diode	37..41V, Izt=5mA, Zzt=90 Ohm, 500mW	SOD-80	15d	2h	Ttr
C3V0	-	ZMM3V0	Z-diode	3.0V± 5%, Izt=5mA, Zzt=85 Ohm, 500mW	SOD-80	15d	2h	Ttr
C3V0	-	ZMM55-C3V0	Z-diode	2.80..3.20V, Zzt=85 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C3V0	-	ZMMC3V0	Z-diode	2.8..3.2V, Izt=5mA, Zzt=85 Ohm, 500mW	SOD-80	15d	2h	Ttr
C3V3	-	ZMM3V3	Z-diode	3.3V± 5%, Izt=5mA, Zzt=85 Ohm, 500mW	SOD-80	15d	2h	Ttr
C3V3	-	ZMM55-C3V3	Z-diode	3.10..3.50V, Zzt=85 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C3V3	-	ZMMC3V3	Z-diode	3.1..3.5V, Izt=5mA, Zzt=85 Ohm, 500mW	SOD-80	15d	2h	Ttr
C3V6	-	ZMM3V6	Z-diode	3.6V± 5%, Izt=5mA, Zzt=85 Ohm, 500mW	SOD-80	15d	2h	Ttr
C3V6	-	ZMM55-C3V6	Z-diode	3.40..3.80V, Zzt=85 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C3V6	-	ZMMC3V6	Z-diode	3.4..3.8V, Izt=5mA, Zzt=85 Ohm, 500mW	SOD-80	15d	2h	Ttr
C3V9	-	ZMM3V9	Z-diode	3.9V± 5%, Izt=5mA, Zzt=85 Ohm, 500mW	SOD-80	15d	2h	Ttr
C3V9	-	ZMM55-C3V9	Z-diode	3.70..4.10V, Zzt=85 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C3V9	-	ZMMC3V9	Z-diode	3.7..4.1V, Izt=5mA, Zzt=85 Ohm, 500mW	SOD-80	15d	2h	Ttr
C43V	-	ZMM43	Z-diode	40V± 5%, Izt=5mA, Zzt=90 Ohm, 500mW	SOD-80	15d	2h	Ttr
C43V	-	ZMM55-C43	Z-diode	40.0..46.00V, Zzt=90 Ohm, Izt=2.5mA, 500mW	SOD-80	15d	2c	Pjt
C43V	-	ZMMC43	Z-diode	40..46V, Izt=5mA, Zzt=90 Ohm, 500mW	SOD-80	15d	2h	Ttr
C47V	-	ZMM47	Z-diode	47V± 5%, Izt=5mA, Zzt=110 Ohm, 500mW	SOD-80	15d	2h	Ttr
C47V	-	ZMM55-C47	Z-diode	44.0..50.00V, Zzt=110 Ohm, Izt=2.5mA, 500mW	SOD-80	15d	2c	Pjt
C47V	-	ZMMC47	Z-diode	44..50V, Izt=5mA, Zzt=110 Ohm, 500mW	SOD-80	15d	2h	Ttr
C4V3	-	ZMM4V3	Z-diode	4.3V± 5%, Izt=5mA, Zzt=75 Ohm, 500mW	SOD-80	15d	2h	Ttr
C4V3	-	ZMM55-C4V3	Z-diode	4.0..4.60V, Zzt=75 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C4V3	-	ZMMC4V3	Z-diode	4..4.6V, Izt=5mA, Zzt=75 Ohm, 500mW	SOD-80	15d	2h	Ttr
C4V7	-	ZMM4V7	Z-diode	4.7V± 5%, Izt=5mA, Zzt=60 Ohm, 500mW	SOD-80	15d	2h	Ttr
C4V7	-	ZMM55-C4V7	Z-diode	4.40..5.00V, Zzt=60 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C4V7	-	ZMMC4V7	Z-diode	4.4..5V, Izt=5mA, Zzt=60 Ohm, 500mW	SOD-80	15d	2h	Ttr
C51V	-	ZMM51	Z-diode	51V± 5%, Izt=5mA, Zzt=125 Ohm, 500mW	SOD-80	15d	2h	Ttr
C51V	-	ZMMC51	Z-diode	48..54V, Izt=5mA, Zzt=125 Ohm, 500mW	SOD-80	15d	2h	Ttr
C56V	-	ZMM56	Z-diode	56V± 5%, Izt=5mA, Zzt=135 Ohm, 500mW	SOD-80	15d	2h	Ttr
C56V	-	ZMMC56	Z-diode	52..60V, Izt=5mA, Zzt=135 Ohm, 500mW	SOD-80	15d	2h	Ttr
C5V1	-	ZMM55-C5V1	Z-diode	4.80..5.40V, Zzt=35 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C5V1	-	ZMM5V1	Z-diode	5.1V± 5%, Izt=5mA, Zzt=35 Ohm, 500mW	SOD-80	15d	2h	Ttr
C5V1	-	ZMMC5V1	Z-diode	4.8..5.4V, Izt=5mA, Zzt=35 Ohm, 500mW	SOD-80	15d	2h	Ttr
C5V6	-	ZMM55-C5V6	Z-diode	5.20..6.00V, Zzt=25 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C5V6	-	ZMM5V6	Z-diode	5.6V± 5%, Izt=5mA, Zzt=25 Ohm, 500mW	SOD-80	15d	2h	Ttr
C5V6	-	ZMMC5V6	Z-diode	5.2..6V, Izt=5mA, Zzt=25 Ohm, 500mW	SOD-80	15d	2h	Ttr
C62V	-	ZMM62	Z-diode	62V± 5%, Izt=5mA, Zzt=150 Ohm, 500mW	SOD-80	15d	2h	Ttr
C62V	-	ZMMC62	Z-diode	58..66V, Izt=5mA, Zzt=150 Ohm, 500mW	SOD-80	15d	2h	Ttr
C68V	-	ZMM68	Z-diode	68V± 5%, Izt=5mA, Zzt=200 Ohm, 500mW	SOD-80	15d	2h	Ttr
C68V	-	ZMMC68	Z-diode	64..72V, Izt=5mA, Zzt=200 Ohm, 500mW	SOD-80	15d	2h	Ttr
C6V2	-	ZMM55-C6V2	Z-diode	5.80..6.60V, Zzt=10 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C6V2	-	ZMM6V2	Z-diode	6.2V± 5%, Izt=5mA, Zzt=10 Ohm, 500mW	SOD-80	15d	2h	Ttr
C6V2	-	ZMMC6V2	Z-diode	5.8..6.6V, Izt=5mA, Zzt=10 Ohm, 500mW	SOD-80	15d	2h	Ttr
C6V8	-	ZMM55-C6V8	Z-diode	6.40..7.20V, Zzt=8 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C6V8	-	ZMM6V8	Z-diode	6.8V± 5%, Izt=5mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2h	Ttr
C6V8	-	ZMMC6V8	Z-diode	6.4..7.2V, Izt=5mA, Zzt=8 Ohm, 500mW	SOD-80	15d	2h	Ttr
C75V	-	ZMM75	Z-diode	75V± 5%, Izt=5mA, Zzt=250 Ohm, 500mW	SOD-80	15d	2h	Ttr
C75V	-	ZMMC75	Z-diode	70..79V, Izt=5mA, Zzt=250 Ohm, 500mW	SOD-80	15d	2h	Ttr
C7V5	-	ZMM55-C7V5	Z-diode	7.0..7.90V, Zzt=7 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C7V5	-	ZMM7V5	Z-diode	7.5V± 5%, Izt=5mA, Zzt=7 Ohm, 500mW	SOD-80	15d	2h	Ttr
C7V5	-	ZMMC7V5	Z-diode	7..7.9V, Izt=5mA, Zzt=7 Ohm, 500mW	SOD-80	15d	2h	Ttr
C82V	-	ZMM82	Z-diode	82V± 5%, Izt=5mA, Zzt=300 Ohm, 500mW	SOD-80	15d	2h	Ttr
C82V	-	ZMMC82	Z-diode	77..87V, Izt=5mA, Zzt=300 Ohm, 500mW	SOD-80	15d	2h	Ttr
C8V2	-	ZMM55-C8V2	Z-diode	7.70..8.70V, Zzt=7 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C8V2	-	ZMM8V2	Z-diode	8.2V± 5%, Izt=5mA, Zzt=7 Ohm, 500mW	SOD-80	15d	2h	Ttr
C8V2	-	ZMMC8V2	Z-diode	7.7..8.7V, Izt=5mA, Zzt=7 Ohm, 500mW	SOD-80	15d	2h	Ttr
C91V	-	ZMM91	Z-diode	91V± 5%, Izt=5mA, Zzt=450 Ohm, 500mW	SOD-80	15d	2h	Ttr
C91V	-	ZMMC91	Z-diode	85..96V, Izt=5mA, Zzt=450 Ohm, 500mW	SOD-80	15d	2h	Ttr
C9V1	-	ZMM55-C9V1	Z-diode	8.50..9.60V, Zzt=10 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
C9V1	-	ZMM9V1	Z-diode	9.0V± 5%, Izt=5mA, Zzt=10 Ohm, 500mW	SOD-80	15d	2h	Ttr
C9V1	-	ZMMC9V1	Z-diode	8.5..9.6V, Izt=5mA, Zzt=10 Ohm, 500mW	SOD-80	15d	2h	Ttr
Z10A	-	GLZJ10A	Z-diode	9.12..9.59V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z10A	-	TLZJ10A	Z-diode	9.12..9.59V, Izt=5mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2g	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
Z10B	-	GLZJ10B	Z-diode	9.41..9.90V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z10B	-	TLZJ10B	Z-diode	9.41..9.90V, Izt=5mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z10C	-	GLZJ10C	Z-diode	9.70..10.20V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z10C	-	TLZJ10C	Z-diode	9.70..10.20V, Izt=5mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z10D	-	GLZJ10D	Z-diode	9.94..10.44V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z10D	-	TLZJ10D	Z-diode	9.94..10.44V, Izt=5mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z11A	-	GLZJ11A	Z-diode	10.18..10.71V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z11A	-	TLZJ11A	Z-diode	10.18..10.71V, Izt=5mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z11B	-	GLZJ11B	Z-diode	10.50..11.05V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z11B	-	TLZJ11B	Z-diode	10.50..11.05V, Izt=5mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z11C	-	GLZJ11C	Z-diode	10.82..11.38V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z11C	-	TLZJ11C	Z-diode	10.82..11.38V, Izt=5mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z12A	-	GLZJ12A	Z-diode	11.13..11.71V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z12A	-	TLZJ12A	Z-diode	11.13..11.71V, Izt=5mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z12B	-	GLZJ12B	Z-diode	11.44..12.03V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z12B	-	TLZJ12B	Z-diode	11.44..12.03V, Izt=5mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z12C	-	GLZJ12C	Z-diode	11.74..12.35V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z12C	-	TLZJ12C	Z-diode	11.74..12.35V, Izt=5mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z13A	-	GLZJ13A	Z-diode	12.11..12.75V, Zzt=35 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z13A	-	TLZJ13A	Z-diode	12.11..12.75V, Izt=5mA, Zzt=35 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z13B	-	GLZJ13B	Z-diode	12.55..13.21V, Zzt=35 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z13B	-	TLZJ13B	Z-diode	12.55..13.21V, Izt=5mA, Zzt=35 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z13C	-	GLZJ13C	Z-diode	12.99..13.66V, Zzt=35 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z13C	-	TLZJ13C	Z-diode	12.99..13.66V, Izt=5mA, Zzt=35 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z15A	-	GLZJ15A	Z-diode	13.44..14.13V, Zzt=40 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z15A	-	TLZJ15A	Z-diode	13.44..14.13V, Izt=5mA, Zzt=40 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z15B	-	GLZJ15B	Z-diode	13.89..14.62V, Zzt=40 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z15B	-	TLZJ15B	Z-diode	13.89..14.62V, Izt=5mA, Zzt=40 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z15C	-	GLZJ15C	Z-diode	14.35..15.09V, Zzt=40 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z15C	-	TLZJ15C	Z-diode	14.35..15.09V, Izt=5mA, Zzt=40 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z16A	-	GLZJ16A	Z-diode	14.80..15.57V, Zzt=40 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z16A	-	TLZJ16A	Z-diode	14.80..15.57V, Izt=5mA, Zzt=40 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z16B	-	GLZJ16B	Z-diode	15.25..16.04V, Zzt=40 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z16B	-	TLZJ16B	Z-diode	15.25..16.04V, Izt=5mA, Zzt=40 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z16C	-	GLZJ16C	Z-diode	15.69..16.51V, Zzt=40 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z16C	-	TLZJ16C	Z-diode	15.69..16.51V, Izt=5mA, Zzt=40 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z18A	-	GLZJ18A	Z-diode	16.22..17.06V, Zzt=45 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z18A	-	TLZJ18A	Z-diode	16.22..17.06V, Izt=5mA, Zzt=45 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z18B	-	GLZJ18B	Z-diode	16.82..17.70V, Zzt=45 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z18B	-	TLZJ18B	Z-diode	16.82..17.70V, Izt=5mA, Zzt=45 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z18C	-	GLZJ18C	Z-diode	17.42..18.33V, Zzt=45 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z18C	-	TLZJ18C	Z-diode	17.42..18.33V, Izt=5mA, Zzt=45 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z20A	-	GLZJ20A	Z-diode	18.02..18.96V, Zzt=55 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z20A	-	TLZJ20A	Z-diode	18.02..18.96V, Izt=5mA, Zzt=55 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z20B	-	GLZJ20B	Z-diode	18.63..19.59V, Zzt=55 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z20B	-	TLZJ20B	Z-diode	18.63..19.59V, Izt=5mA, Zzt=55 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z20C	-	GLZJ20C	Z-diode	19.23..20.22V, Zzt=55 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z20C	-	TLZJ20C	Z-diode	19.23..20.22V, Izt=5mA, Zzt=55 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z20D	-	GLZJ20D	Z-diode	19.72..20.72V, Zzt=55 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z20D	-	TLZJ20D	Z-diode	19.72..20.72V, Izt=5mA, Zzt=55 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z22A	-	GLZJ22A	Z-diode	20.15..21.20V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z22A	-	TLZJ22A	Z-diode	20.15..21.20V, Izt=5mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z22B	-	GLZJ22B	Z-diode	20.64..21.71V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z22B	-	TLZJ22B	Z-diode	20.64..21.71V, Izt=5mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z22C	-	GLZJ22C	Z-diode	21.08..22.17V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z22C	-	TLZJ22C	Z-diode	21.08..22.17V, Izt=5mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z22D	-	GLZJ22D	Z-diode	21.52..22.63V, Zzt=30 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z22D	-	TLZJ22D	Z-diode	21.52..22.63V, Izt=5mA, Zzt=30 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z24A	-	GLZJ24A	Z-diode	22.05..23.18V, Zzt=35 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z24A	-	TLZJ24A	Z-diode	22.05..23.18V, Izt=5mA, Zzt=35 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z24B	-	GLZJ24B	Z-diode	22.61..23.77V, Zzt=35 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z24B	-	TLZJ24B	Z-diode	22.61..23.77V, Izt=5mA, Zzt=35 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z24C	-	GLZJ24C	Z-diode	23.12..24.31V, Zzt=35 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z24C	-	TLZJ24C	Z-diode	23.12..24.31V, Izt=5mA, Zzt=35 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z24D	-	GLZJ24D	Z-diode	23.63..24.85V, Zzt=35 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z24D	-	TLZJ24D	Z-diode	23.63..24.85V, Izt=5mA, Zzt=35 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z27A	-	GLZJ27A	Z-diode	24.26..25.52V, Zzt=45 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z27A	-	TLZJ27A	Z-diode	24.26..25.52V, Izt=5mA, Zzt=45 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z27B	-	GLZJ27B	Z-diode	24.97..26.26V, Zzt=45 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z27B	-	TLZJ27B	Z-diode	24.97..26.26V, Izt=5mA, Zzt=45 Ohm, 500mW	SOD-80	15d	2g	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
Z27C	-	GLZJ27C	Z-diode	25.63..26.95V, Zzt=45 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z27C	-	TLZJ27C	Z-diode	25.63..26.95V, Izt=5mA, Zzt=45 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z27D	-	GLZJ27D	Z-diode	26.29..27.64V, Zzt=45 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z27D	-	TLZJ27D	Z-diode	26.29..27.64V, Izt=5mA, Zzt=45 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z2A0	-	GLZJ2.0A	Z-diode	1.88..2.10V, Zzt=100 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z2A0	-	TLZJ2.0A	Z-diode	1.88..2.10V, Izt=5mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z2A2	-	GLZJ2.2A	Z-diode	2.12..2.30V, Zzt=100 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z2A2	-	TLZJ2.2A	Z-diode	2.12..2.30V, Izt=5mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z2A4	-	GLZJ2.4A	Z-diode	2.33..2.52V, Zzt=100 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z2A4	-	TLZJ2.4A	Z-diode	2.33..2.52V, Izt=5mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z2A7	-	GLZJ2.7A	Z-diode	2.54..2.75V, Zzt=110 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z2A7	-	TLZJ2.7A	Z-diode	2.54..2.75V, Izt=5mA, Zzt=110 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z2B0	-	GLZJ2.0B	Z-diode	2.02..2.20V, Zzt=100 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z2B0	-	TLZJ2.0B	Z-diode	2.02..2.20V, Izt=5mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z2B2	-	GLZJ2.2B	Z-diode	2.22..2.41V, Zzt=100 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z2B2	-	TLZJ2.2B	Z-diode	2.22..2.41V, Izt=5mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z2B4	-	GLZJ2.4B	Z-diode	2.43..2.63V, Zzt=100 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z2B4	-	TLZJ2.4B	Z-diode	2.43..2.63V, Izt=5mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z2B7	-	GLZJ2.7B	Z-diode	2.69..2.91V, Zzt=110 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z2B7	-	TLZJ2.7B	Z-diode	2.69..2.91V, Izt=5mA, Zzt=110 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z30A	-	GLZJ30A	Z-diode	26.99..28.39V, Zzt=55 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z30A	-	TLZJ30A	Z-diode	26.99..28.39V, Izt=5mA, Zzt=55 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z30B	-	GLZJ30B	Z-diode	27.70..29.13V, Zzt=55 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z30B	-	TLZJ30B	Z-diode	27.70..29.13V, Izt=5mA, Zzt=55 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z30C	-	GLZJ30C	Z-diode	28.36..29.82V, Zzt=55 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z30C	-	TLZJ30C	Z-diode	28.36..29.82V, Izt=5mA, Zzt=55 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z30D	-	GLZJ30D	Z-diode	29.02..30.51V, Zzt=55 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z30D	-	TLZJ30D	Z-diode	29.02..30.51V, Izt=5mA, Zzt=55 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z33A	-	GLZJ33A	Z-diode	29.68..31.22V, Zzt=65 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z33A	-	TLZJ33A	Z-diode	29.68..31.22V, Izt=5mA, Zzt=65 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z33B	-	GLZJ33B	Z-diode	30.32..31.88V, Zzt=65 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z33B	-	TLZJ33B	Z-diode	30.32..31.88V, Izt=5mA, Zzt=65 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z33C	-	GLZJ33C	Z-diode	30.90..32.50V, Zzt=65 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z33C	-	TLZJ33C	Z-diode	30.90..32.50V, Izt=5mA, Zzt=65 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z33D	-	GLZJ33D	Z-diode	31.49..33.11V, Zzt=65 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z33D	-	TLZJ33D	Z-diode	31.49..33.11V, Izt=5mA, Zzt=65 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z36A	-	GLZJ36A	Z-diode	32.14..33.79V, Zzt=75 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z36A	-	TLZJ36A	Z-diode	32.14..33.79V, Izt=5mA, Zzt=75 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z36B	-	GLZJ36B	Z-diode	32.79..34.49V, Zzt=75 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z36B	-	TLZJ36B	Z-diode	32.79..34.49V, Izt=5mA, Zzt=75 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z36C	-	GLZJ36C	Z-diode	33.4..35.13V, Zzt=75 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z36C	-	TLZJ36C	Z-diode	33.40..35.13V, Izt=5mA, Zzt=75 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z36D	-	GLZJ36D	Z-diode	34.01..35.77V, Zzt=75 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z36D	-	TLZJ36D	Z-diode	34.01..35.77V, Izt=5mA, Zzt=75 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z39A	-	GLZJ39A	Z-diode	34.68..36.47V, Zzt=85 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z39A	-	TLZJ39A	Z-diode	34.68..36.47V, Izt=5mA, Zzt=85 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z39B	-	GLZJ39B	Z-diode	35.36..37.19V, Zzt=85 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z39B	-	TLZJ39B	Z-diode	35.36..37.19V, Izt=5mA, Zzt=85 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z39C	-	GLZJ39C	Z-diode	36.00..37.85V, Zzt=85 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z39C	-	TLZJ39C	Z-diode	36.0..37.85V, Izt=5mA, Zzt=85 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z39D	-	GLZJ39D	Z-diode	36.63..38.52V, Zzt=85 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z39D	-	TLZJ39D	Z-diode	36.63..38.52V, Izt=5mA, Zzt=85 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z3A0	-	GLZJ3.0A	Z-diode	2.85..3.07V, Zzt=120 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z3A0	-	TLZJ3.0A	Z-diode	2.85..3.07V, Izt=5mA, Zzt=120 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z3A3	-	GLZJ3.3A	Z-diode	3.16..3.38V, Zzt=120 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z3A3	-	TLZJ3.3A	Z-diode	3.16..3.38V, Izt=5mA, Zzt=120 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z3A6	-	GLZJ3.6A	Z-diode	3.46..3.69V, Zzt=100 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z3A6	-	TLZJ3.6A	Z-diode	3.46..3.70V, Izt=5mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z3A9	-	GLZJ3.9A	Z-diode	3.74..4.01V, Zzt=100 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z3A9	-	TLZJ3.9A	Z-diode	3.74..4.01V, Izt=5mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z3B0	-	GLZJ3.0B	Z-diode	3.01..3.22V, Zzt=120 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z3B0	-	TLZJ3.0B	Z-diode	3.01..3.22V, Izt=5mA, Zzt=120 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z3B3	-	GLZJ3.3B	Z-diode	3.32..3.53V, Zzt=120 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z3B3	-	TLZJ3.3B	Z-diode	3.32..3.53V, Izt=5mA, Zzt=120 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z3B6	-	GLZJ3.6B	Z-diode	3.60..3.84V, Zzt=100 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z3B6	-	TLZJ3.6B	Z-diode	3.60..3.85V, Izt=5mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z3B9	-	GLZJ3.9B	Z-diode	3.89..4.16V, Zzt=100 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z3B9	-	TLZJ3.9B	Z-diode	3.89..4.16V, Izt=5mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z43	-	GLZJ43	Z-diode	40.0..45.0V, Zzt=90 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z43	-	TLZJ43	Z-diode	40..45V, Izt=5mA, Zzt=90 Ohm, 500mW	SOD-80	15d	2g	Ttr

SMD code	A	Type	Function	Short description	Case	Pin	St	Mnf
Z47	-	GLZJ47	Z-diode	44.0..49.0V, Zzt=90 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z47	-	TLZJ47	Z-diode	44..49V, Izt=5mA, Zzt=90 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z4A3	-	GLZJ4.3A	Z-diode	4.04..4.29V, Zzt=100 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z4A3	-	TLZJ4.3A	Z-diode	4.04..4.29V, Izt=5mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z4A7	-	GLZJ4.7A	Z-diode	4.44..4.68V, Zzt=90 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z4A7	-	TLZJ4.7A	Z-diode	4.44..4.68V, Izt=5mA, Zzt=90 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z4B3	-	GLZJ4.3B	Z-diode	4.17..4.43V, Zzt=100 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z4B3	-	TLZJ4.3B	Z-diode	4.17..4.43V, Izt=5mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z4B7	-	GLZJ4.7B	Z-diode	4.55..4.80V, Zzt=90 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z4B7	-	TLZJ4.7B	Z-diode	4.55..4.80V, Izt=5mA, Zzt=90 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z4C3	-	GLZJ4.3C	Z-diode	4.30..4.57V, Zzt=100 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z4C3	-	TLZJ4.3C	Z-diode	4.30..4.57V, Izt=5mA, Zzt=100 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z4C7	-	GLZJ4.7C	Z-diode	4.68..4.93V, Zzt=90 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z4C7	-	TLZJ4.7C	Z-diode	4.68..4.93V, Izt=5mA, Zzt=90 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z51	-	GLZJ51	Z-diode	48.0..54.0V, Zzt=110 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z51	-	TLZJ51	Z-diode	48..54V, Izt=5mA, Zzt=110 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z56	-	GLZJ56	Z-diode	53.0..60.0V, Zzt=110 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z56	-	TLZJ56	Z-diode	53..60V, Izt=5mA, Zzt=110 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z5A1	-	GLZJ5.1A	Z-diode	4.81..5.07V, Zzt=80 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z5A1	-	TLZJ5.1A	Z-diode	4.81..5.07V, Izt=5mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z5A6	-	GLZJ5.6A	Z-diode	5.28..5.55V, Zzt=60 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z5A6	-	TLZJ5.6A	Z-diode	5.28..5.55V, Izt=5mA, Zzt=60 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z5B1	-	GLZJ5.1B	Z-diode	4.94..5.20V, Zzt=80 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z5B1	-	TLZJ5.1B	Z-diode	4.94..5.20V, Izt=5mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z5B6	-	GLZJ5.6B	Z-diode	5.45..5.73V, Zzt=60 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z5B6	-	TLZJ5.6B	Z-diode	5.451..5.73V, Izt=5mA, Zzt=60 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z5C1	-	GLZJ5.1C	Z-diode	5.09..5.37V, Zzt=80 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z5C1	-	TLZJ5.1C	Z-diode	5.09..5.37V, Izt=5mA, Zzt=80 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z5C6	-	GLZJ5.6C	Z-diode	5.61..5.91V, Zzt=60 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z5C6	-	TLZJ5.6C	Z-diode	5.61..5.91V, Izt=5mA, Zzt=60 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z6A2	-	GLZJ6.2A	Z-diode	5.78..6.09V, Zzt=60 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z6A2	-	TLZJ6.2A	Z-diode	5.78..6.09V, Izt=5mA, Zzt=60 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z6A8	-	GLZJ6.8A	Z-diode	6.29..6.63V, Zzt=20 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z6A8	-	TLZJ6.8A	Z-diode	6.29..6.63V, Izt=5mA, Zzt=20 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z6B2	-	GLZJ6.2B	Z-diode	5.96..6.27V, Zzt=60 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z6B2	-	TLZJ6.2B	Z-diode	5.96..6.27V, Izt=5mA, Zzt=60 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z6B8	-	GLZJ6.8B	Z-diode	6.49..6.83V, Zzt=20 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z6B8	-	TLZJ6.8B	Z-diode	6.49..6.83V, Izt=5mA, Zzt=20 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z6C2	-	GLZJ6.2C	Z-diode	6.12..6.44V, Zzt=60 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z6C2	-	TLZJ6.2C	Z-diode	6.12..6.44V, Izt=5mA, Zzt=60 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z6C8	-	GLZJ6.8C	Z-diode	6.66..7.01V, Zzt=20 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z6C8	-	TLZJ6.8C	Z-diode	6.66..7.01V, Izt=5mA, Zzt=20 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z7A5	-	GLZJ7.5A	Z-diode	6.85..7.22V, Zzt=20 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z7A5	-	TLZJ7.5A	Z-diode	6.85..7.22V, Izt=5mA, Zzt=20 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z7B5	-	GLZJ7.5B	Z-diode	7.07..7.45V, Zzt=20 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z7B5	-	TLZJ7.5B	Z-diode	7.07..7.45V, Izt=5mA, Zzt=20 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z7C5	-	GLZJ7.5C	Z-diode	7.29..7.67V, Zzt=20 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z7C5	-	TLZJ7.5C	Z-diode	7.29..7.67V, Izt=5mA, Zzt=20 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z8A2	-	GLZJ8.2A	Z-diode	7.53..7.92V, Zzt=20 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z8A2	-	TLZJ8.2A	Z-diode	7.53..7.92V, Izt=5mA, Zzt=20 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z8B2	-	GLZJ8.2B	Z-diode	7.78..8.19V, Zzt=20 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z8B2	-	TLZJ8.2B	Z-diode	7.78..8.19V, Izt=5mA, Zzt=20 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z8C2	-	GLZJ8.2C	Z-diode	8.03..8.45V, Zzt=20 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z8C2	-	TLZJ8.2C	Z-diode	8.03..8.45V, Izt=5mA, Zzt=20 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z9A1	-	GLZJ9.1A	Z-diode	8.29..8.73V, Zzt=25 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z9A1	-	TLZJ9.1A	Z-diode	8.29..8.73V, Izt=5mA, Zzt=25 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z9B1	-	GLZJ9.1B	Z-diode	8.57..9.01V, Zzt=25 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z9B1	-	TLZJ9.1B	Z-diode	8.57..9.01V, Izt=5mA, Zzt=25 Ohm, 500mW	SOD-80	15d	2g	Ttr
Z9C1	-	GLZJ9.1C	Z-diode	8.83..9.30V, Zzt=25 Ohm, Izt=5mA, 500mW	SOD-80	15d	2c	Pjt
Z9C1	-	TLZJ9.1C	Z-diode	8.83..9.30V, Izt=5mA, Zzt=25 Ohm, 500mW	SOD-80	15d	2g	Ttr









SECTION 3
3-pin case SMD semiconductor components

0
1
2
3
4
5
6
7
8
9
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
-	cr	ELM7548NEB	Vdet-IC	4.8V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
-	cs	ELM7548CEB	Vdet-IC	4.8V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
#	cr	ELM7541NEB	Vdet-IC	4.1V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
#	cs	ELM7541CEB	Vdet-IC	4.1V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
*	cr	ELM7546NEB	Vdet-IC	4.6V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
*	cs	ELM7546CEB	Vdet-IC	4.6V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
.038	-	MC1038	n-MOSFET	GP, 20V, 750mA, 300mW, 0.24Ω(600mA), 3.8/252μs	SC-89-3	16fh	-	3a	Mep
/	cr	ELM7554NEB	Vdet-IC	5.4V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
/	cs	ELM7554CEB	Vdet-IC	5.4V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
+	cr	ELM7547NEB	Vdet-IC	4.7V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
+	cs	ELM7547CEB	Vdet-IC	4.7V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
+FZWC	-	LM4040CEM3-5.0/V+T	Vref-IC	μPower, Precision, Shunt, 5.00V±0.5%	SOT-23	16dk	RF1	3a	Max
+P2	-	BFR92A	Si-npn	UHF-A-Band, 20V, 25mA, 300mW, B>40, >5GHz	SOT-23	16ta	-	3a	Sil
+P5	-	BFR92AR	Si-npn	UHF-A-Band, 20V, 25mA, 300mW, B>40, >5GHz	SOT-23	16te	-	3a	Sil
+R2	-	BFR93A	Si-npn	UHF-A-Band, 15V, 30mA, 300mW, B>40, >5GHz	SOT-23	16ta	-	3a	Sil
+R5	-	BFR93AR	Si-npn	UHF-A-Band, 15V, 30mA, 300mW, B>40, >5GHz	SOT-23	16te	-	3a	Sil
<	cr	ELM7553NEB	Vdet-IC	5.3V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
<	cs	ELM7553CEB	Vdet-IC	5.3V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
=	cr	ELM7544NEB	Vdet-IC	4.4V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
=	cs	ELM7544CEB	Vdet-IC	4.4V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
>	cr	ELM7549NEB	Vdet-IC	4.9V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
>	cs	ELM7549CEB	Vdet-IC	4.9V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
0.	cr	ELM7552NEB	Vdet-IC	5.2V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
0.	cs	ELM7552CEB	Vdet-IC	5.2V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
00	-	AP8822C-40GA	Vdet-IC	4.0V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
00	-	AP8822C-40GT	Vdet-IC	4.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
00	-	AP8822C-40PA	Vdet-IC	4.0V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
00	-	AP8822C-40PT	Vdet-IC	4.0V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
005	-	SO2484R	Si-npn	AF, LN, 60V, 50mA, 360mW, 100MHz, B>100	SOT-23	16te	-	3a	Ste
01	-	AP8822C-41GA	Vdet-IC	4.1V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
01	-	AP8822C-41GT	Vdet-IC	4.1V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
01	-	AP8822C-41PA	Vdet-IC	4.1V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
01	-	AP8822C-41PT	Vdet-IC	4.1V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
01	-	PDTA143EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=4.7k/4.7k	SOT-416	16ta	-	3a	Nxp
01	-	PDTA143EK	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k	SC-59	16ta	-	3a	Nxp
011	-	SO2369R	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120, 400MHz	SOT-23	16te	-	3a	Zx
012	-	SO2221R	Si-npn	GP, 60V, 800mA, 500mW, >250MHz, B>20	SOT-23	16te	-	3a	Ste
013	-	SO2222R	Si-npn	GP, 60V, 800mA, 350mW, B=100..300, >300MHz	SOT-23	16te	-	3a	Ste
018	-	SO1711R	Si-npn	GP. 75V, 1A, 1W, >70MHz	SOT-23	16te	-	3a	Zx
01A	-	APR3001-15A	Vdet-IC	1.5V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Anp
01A	-	RA101C	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	SOT-23	16ta	-	3a	San
01B	-	APR3001-17A	Vdet-IC	1.75V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Anp
01C	-	APR3001-23A	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Anp
01C	-	RC101C	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	SOT-23	16ta	-	3a	San
01D	-	APR3001-26A	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Anp
01E	-	APR3001-29A	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Anp
01F	-	APR3001-30A	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Anp
01G	-	APR3001-39A	Vdet-IC	3.9V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Anp
01H	-	APR3001-43A	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Anp
01J	-	APR3001-46A	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Anp
02	-	AP8822C-42GA	Vdet-IC	4.2V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
02	-	AP8822C-42GT	Vdet-IC	4.2V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
02	-	AP8822C-42PA	Vdet-IC	4.2V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
02	-	AP8822C-42PT	Vdet-IC	4.2V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
02	-	BSX39	Si-npn	Sw, Driver, 45V, 0.2A, <12/18ns	SOT-23	16te	-	3a	Mot
02	-	PDTC143EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=4.7k/4.7k	SOT-416	16ta	-	3a	Nxp
02	-	PDTC143EK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k	SC-59	16ta	-	3a	Nxp
02	de	2N7002	n-MOSFET	TMOS, 60V, 115mA, 225mW, <7.5Ω(500mA), 20/40ns	SOT-23	16fh	-	3b	Sec
02¯	-	2N7002	n-MOSFET	TMOS, 60V, 115mA, 225mW, <7.5Ω(500mA), 20/40ns	SOT-23	16fh	-	3b	Frm
020	-	SO1711AR	Si-npn	GP. 75V, 1A, 1W, >70MHz	SOT-23	16te	-	3a	Zx
020	-	SO2222AR	Si-npn	GP, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16te	-	3a	Ste
026	-	ZXTP25140BFH	Si-pnp	Sw, HV, Drv, 180V, 1A, 730mW, B=100..300, 75MHz	SOT-23	16ta	-	3a	Zx
027	-	SO1893R	Si-npn	AF, Sw, 120V, 500mA, 800mW, 70MHz	SOT-23	16te	-	3a	Ste
02A	-	APR3002-15A	Vdet-IC	1.5V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Anp
02C	-	APR3002-23A	Vdet-IC	2.32V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Anp
02D	-	APR3002-26A	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Anp
02E	-	APR3002-29A	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Anp
02F	-	APR3002-30A	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Anp
02F	-	CH493DPT	Si-diode	Dual, SBD, 40V, 400mA, Vf<0.5V(200mA)	SOT-23	16dg	-	3a	Chm
02G	-	APR3002-39A	Vdet-IC	3.9V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Anp



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
02H	-	APR3002-43A	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Anp
02J	-	APR3002-46A	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Anp
02K¯	-	2N7002K	n-MOSFET	TMOS, 60V, 115mA, 225mW, <7.5Ω(500mA), 20/40ns	SOT-23	16fh	-	3b	Frm
03	-	AP8822C-43GA	Vdet-IC	4.3V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
03	-	AP8822C-43GT	Vdet-IC	4.3V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
03	-	AP8822C-43PA	Vdet-IC	4.3V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
03	-	AP8822C-43PT	Vdet-IC	4.3V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
03	-	DTC143TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=4k7	SOT-416	16ta	-	3a	Rhm
03	-	DTC143TKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4k7	SOT-346	16ta	-	3a	Rhm
03	-	DTC143TM	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=4k7	VMT3	18ta	-	3a	Rhm
03	-	DTC143TUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4.7k	UMT3	16ta	-	3a	Rhm
03	-	MSCT03	TVS	Vrwm=3.3V, 300W (8/20µs)	SOT-23	16dh	-	3a	Msp
03	-	PDTA114EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=10k/10k	SOT-416	16ta	-	3a	Nxp
03	-	PDTA114EEF	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k	SOT-490	18ta	-	3a	Nxp
03	-	PDTA114EK	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k	SC-59	16ta	-	3a	Nxp
0312	-	LC1203CB3TR12	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0313	-	LC1203CB3TR13	LVR-IC	LDO, 1.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0314	-	LC1203CB3TR14	LVR-IC	LDO, 1.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0315	-	LC1203CB3TR15	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0316	-	LC1203CB3TR16	LVR-IC	LDO, 1.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0317	-	LC1203CB3TR17	LVR-IC	LDO, 1.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0318	-	LC1203CB3TR18	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0319	-	LC1203CB3TR19	LVR-IC	LDO, 1.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0320	-	LC1203CB3TR20	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0321	-	LC1203CB3TR21	LVR-IC	LDO, 2.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0322	-	LC1203CB3TR22	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0323	-	LC1203CB3TR23	LVR-IC	LDO, 2.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0324	-	LC1203CB3TR24	LVR-IC	LDO, 2.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0325	-	LC1203CB3TR25	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0326	-	LC1203CB3TR26	LVR-IC	LDO, 2.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0327	-	LC1203CB3TR27	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0328	-	LC1203CB3TR28	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0329	-	LC1203CB3TR29	LVR-IC	LDO, 2.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0330	-	LC1203CB3TR30	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0331	-	LC1203CB3TR31	LVR-IC	LDO, 3.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0332	-	LC1203CB3TR32	LVR-IC	LDO, 3.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0333	-	LC1203CB3TR33	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0334	-	LC1203CB3TR34	LVR-IC	LDO, 3.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0335	-	LC1203CB3TR35	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0336	-	LC1203CB3TR36	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0337	-	LC1203CB3TR37	LVR-IC	LDO, 3.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0338	-	LC1203CB3TR38	LVR-IC	LDO, 3.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0339	-	LC1203CB3TR39	LVR-IC	LDO, 3.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0340	-	LC1203CB3TR40	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0341	-	LC1203CB3TR41	LVR-IC	LDO, 4.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0342	-	LC1203CB3TR42	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0343	-	LC1203CB3TR43	LVR-IC	LDO, 4.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0344	-	LC1203CB3TR44	LVR-IC	LDO, 4.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0345	-	LC1203CB3TR45	LVR-IC	LDO, 4.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0346	-	LC1203CB3TR46	LVR-IC	LDO, 4.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0347	-	LC1203CB3TR47	LVR-IC	LDO, 4.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0348	-	LC1203CB3TR48	LVR-IC	LDO, 4.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0349	-	LC1203CB3TR49	LVR-IC	LDO, 4.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0350	-	LC1203CB3TR50	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0351	-	LC1203CB3TR51	LVR-IC	LDO, 5.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0352	-	LC1203CB3TR52	LVR-IC	LDO, 5.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0353	-	LC1203CB3TR53	LVR-IC	LDO, 5.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0354	-	LC1203CB3TR54	LVR-IC	LDO, 5.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0355	-	LC1203CB3TR55	LVR-IC	LDO, 5.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0356	-	LC1203CB3TR56	LVR-IC	LDO, 5.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0357	-	LC1203CB3TR57	LVR-IC	LDO, 5.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0358	-	LC1203CB3TR58	LVR-IC	LDO, 5.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0359	-	LC1203CB3TR59	LVR-IC	LDO, 5.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
0360	-	LC1203CB3TR60	LVR-IC	LDO, 6.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Lch
03A	-	APR3003-15A	Vdet-IC	1.5V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Anp
03B	-	APR3003-17A	Vdet-IC	1.75V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Anp
03C	-	APR3003-23A	Vdet-IC	2.32V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Anp
03C	-	MSCT03C	TVS	Dual, Vrwm=3.3V, 300W (8/20µs), Bidir.	SOT-23	16dp	-	3a	Msp
03D	-	APR3003-26A	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Anp
03E	-	APR3003-29A	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Anp



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
03F	-	APR3003-30A	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Anp
03F	-	CH494DPT	Si-diode	Dual, SBD, 40V, 400mA, Vf<0.5V(200mA)	SOT-23	16dl	-	3a	Chm
03F	-	CH494WSPT	Si-diode	Dual, SBD, 40V, 400mA, Vf<0.5V(200mA)	SOT-323	16dl	-	3a	Chm
03G	-	APR3003-39A	Vdet-IC	3.9V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Anp
03H	-	APR3003-43A	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Anp
03J	-	APR3003-46A	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Anp
03J	-	FM803JS3X	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	F
03L	-	FM803LS3X	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	F
03M	-	FM803MS3X	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	F
03R	-	FM803RS3X	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	F
03S	-	FM803SS3X	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	F
03T	-	FM803TS3X	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	F
04	-	AP8822C-44GA	Vdet-IC	4.4V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
04	-	AP8822C-44GT	Vdet-IC	4.4V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
04	-	AP8822C-44PA	Vdet-IC	4.4V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
04	-	AP8822C-44PT	Vdet-IC	4.4V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
04	-	DTC114TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=10k	SOT-416	16ta	-	3a	Rhm
04	-	DTC114TKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	SOT-346	16ta	-	3a	Rhm
04	-	DTC114TM	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=10k	VMT3	18ta	-	3a	Rhm
04	-	DTC114TUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	UMT3	16ta	-	3a	Rhm
04	-	PDTC114EK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k	SC-59	16ta	-	3a	Nxp
04	cq	ELM7514NBB	Vdet-IC	1.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
04	ct	ELM7514CBB	Vdet-IC	1.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
-04	-	PMSS3904	Si-npn	GP, 60V, 100mA, 200mW, B=100..300, >180MHz	SOT-323	16ta	-	3a	PhH
04A	-	RA104C	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/47k	SOT-23	16ta	-	3a	San
04C	-	RC104C	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/47k	SOT-23	16ta	-	3a	San
04C	-	TVS2303PT	TVS	Dual, Vbr=4V, Vrwm=3.3V, 1A, 300W(1ms)	SOT-23	16df	-	3a	Chm
04F	-	CH495DPT	Si-diode	Dual, SBD, 40V, 400mA, Vf<0.5V(200mA)	SOT-23	16df	-	3a	Chm
05	-	AP8822C-45GA	Vdet-IC	4.5V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
05	-	AP8822C-45GT	Vdet-IC	4.5V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
05	-	AP8822C-45PA	Vdet-IC	4.5V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
05	-	AP8822C-45PT	Vdet-IC	4.5V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
05	-	DTC124TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=22k	SOT-416	16ta	-	3a	Rhm
05	-	DTC124TKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=22k	SOT-346	16ta	-	3a	Rhm
05	-	DTC124TM	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=22k	VMT3	18ta	-	3a	Rhm
05	-	DTC124TUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, B=111..600, >200MHz, R1=22k	UMT3	16ta	-	3a	Rhm
05	-	MSCT05	TVS	Vrwm=5V, 300W (8/20µs)	SOT-23	16dh	-	3a	Msp
05	-	PDTA124EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=22k/22k	SOT-416	16ta	-	3a	Nxp
05	-	PDTA124EK	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k	SC-59	16ta	-	3a	Nxp
05	cq	ELM7515NBB	Vdet-IC	1.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
05	ct	ELM7515CBB	Vdet-IC	1.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
054	-	SO2221AR	Si-npn	GP, 75V, 800mA, 500mW, >250MHz, B>20	SOT-23	16te	-	3a	Ste
056	-	ZXTP25100BFH	Si-pnp	Sw, HV, Drv, 140V, 2A, 730mW, B=100..300, 200MHz	SOT-23	16ta	-	3a	Zx
05C	-	MSCT05C	TVS	Dual, Vrwm=5V, 300W (8/20µs), Bidir.	SOT-23	16dp	-	3a	Msp
05C	-	TVS2305PT	TVS	Dual, Vbr=6V, Vrwm=5V, 1A, 300W(1ms)	SOT-23	16df	-	3a	Chm
05F	-	CH400DPT	Si-diode	SBD, 40V, 500mA, Vf<0.55V(500mA)	SOT-23	16dc	-	3a	Chm
05H	-	CH401DPT	Si-diode	SBD, 30V, 200mA, Vf<0.5V(300mA)	SOT-23	16dc	-	3a	Chm
05K	-	CH402DPT	Si-diode	SBD, 30V, 300mA, Vf<0.5V(300mA)	SOT-23	16dc	-	3a	Chm
05T	-	CH411DPT	Si-diode	SBD, 40V, 500mA, Vf<0.5V(500mA)	SOT-23	16dc	-	3a	Chm
06	-	AP8822C-46GA	Vdet-IC	4.6V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
06	-	AP8822C-46GT	Vdet-IC	4.6V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
06	-	AP8822C-46PA	Vdet-IC	4.6V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
06	-	AP8822C-46PT	Vdet-IC	4.6V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
06	-	PDTC124EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=22k/22k	SOT-416	16ta	-	3a	Nxp
06	-	PDTC124EK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k	SC-59	16ta	-	3a	Nxp
06	cq	ELM7516NBB	Vdet-IC	1.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
06	ct	ELM7516CBB	Vdet-IC	1.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
-06	-	PMSS3906	Si-pnp	GP, 60V, 100mA, 200mW, B=100..300, >150MHz	SOT-323	16ta	-	3a	PhH
07	-	AP8822C-47GA	Vdet-IC	4.7V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
07	-	AP8822C-47GT	Vdet-IC	4.7V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
07	-	AP8822C-47PA	Vdet-IC	4.7V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
07	-	AP8822C-47PT	Vdet-IC	4.7V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
07	-	PDTA144EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=47k/47k	SOT-416	16ta	-	3a	Nxp
07	-	PDTA144EEF	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/47k	SOT-490	18ta	-	3a	Nxp
07	-	PDTA144EK	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/47k	SC-59	16ta	-	3a	Nxp
07	cq	ELM7517NBB	Vdet-IC	1.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
07	ct	ELM7517CBB	Vdet-IC	1.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
071	-	SO3904R	Si-npn	GP, 60V, 100mA, 200mW, B= 100..300, >300MHz	SOT-23	16te	-	3a	Ste
079	-	SO5550R	Si-npn	HV, 140V, 600mA, 225mW, B=80..250, >300MHz	SOT-23	16te	-	3a	Ste
08	-	AP8822C-48GA	Vdet-IC	4.8V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
08	-	AP8822C-48GT	Vdet-IC	4.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
08	-	AP8822C-48PA	Vdet-IC	4.8V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
08	-	AP8822C-48PT	Vdet-IC	4.8V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
08	-	MSCT08	TVS	Vrwm=8V, 300W (8/20µs)	SOT-23	16dh	-	3a	Msp
08	-	PDTC144EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=47k/47k	SOT-416	16ta	-	3a	Nxp
08	-	PDTC144EEF	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/47k	SOT-490	18ta	-	3a	Nxp
08	-	PDTC144EK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/47k	SC-59	16ta	-	3a	Nxp
08	cq	ELM7518NBB	Vdet-IC	1.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
08	ct	ELM7518CBB	Vdet-IC	1.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
081	-	SO2369AR	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120, 500MHz	SOT-23	16te	-	3a	Zx
08C	-	MSCT08C	TVS	Dual, Vrwm=8V, 300W (8/20µs), Bidir.	SOT-23	16dp	-	3a	Msp
09	-	AP8822C-49GA	Vdet-IC	4.9V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
09	-	AP8822C-49GT	Vdet-IC	4.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
09	-	AP8822C-49PA	Vdet-IC	4.9V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
09	-	AP8822C-49PT	Vdet-IC	4.9V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
09	-	DTC115TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=100k	SOT-416	16ta	-	3a	Rhm
09	-	DTC115TKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=100k	SOT-346	16ta	-	3a	Rhm
09	-	DTC115TM	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=100k	VMT3	18ta	-	3a	Rhm
09	-	DTC115TUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=100k	UMT3	16ta	-	3a	Rhm
09	-	ELM9709NBB	Vdet-IC	0.9V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
09	-	PDTC114EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=10k/10k	SOT-416	16ta	-	3a	Nxp
09	-	PDTC114EEF	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k	SOT-490	18ta	-	3a	Nxp
09	cq	ELM7519NBB	Vdet-IC	1.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
09	ct	ELM7519CBB	Vdet-IC	1.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
090AC	-	BL8509-090ACRM	Vdet-IC	0.9V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
090AC	-	LC9009CB3TR090AC	Vdet-IC	0.9V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
090AN	-	BL8509-090ANRM	Vdet-IC	0.9V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
090AN	-	LC9009CB3TR090AN	Vdet-IC	0.9V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
090BC	-	BL8509-090BCRM	Vdet-IC	0.9V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
090BC	-	LC9009CB3TR090BC	Vdet-IC	0.9V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
090BN	-	BL8509-090BNRM	Vdet-IC	0.9V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
090BN	-	LC9009CB3TR090BN	Vdet-IC	0.9V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
090CC	-	BL8509-090CCRM	Vdet-IC	0.9V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
090CC	-	LC9009CB3TR090CC	Vdet-IC	0.9V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
090CN	-	BL8509-090CNRM	Vdet-IC	0.9V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
090CN	-	LC9009CB3TR090CN	Vdet-IC	0.9V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
090DC	-	BL8509-090DCRM	Vdet-IC	0.9V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
090DC	-	LC9009CB3TR090DC	Vdet-IC	0.9V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
090DN	-	BL8509-090DNRM	Vdet-IC	0.9V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
090DN	-	LC9009CB3TR090DN	Vdet-IC	0.9V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
090EC	-	BL8509-090ECRM	Vdet-IC	0.9V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
090EC	-	LC9009CB3TR090EC	Vdet-IC	0.9V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
090EN	-	BL8509-090ENRM	Vdet-IC	0.9V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
090EN	-	LC9009CB3TR090EN	Vdet-IC	0.9V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
090FC	-	BL8509-090FCRM	Vdet-IC	0.9V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
090FC	-	LC9009CB3TR090FC	Vdet-IC	0.9V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
090FN	-	BL8509-090FNRM	Vdet-IC	0.9V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
090FN	-	LC9009CB3TR090FN	Vdet-IC	0.9V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
090GC	-	BL8509-090GCRM	Vdet-IC	0.9V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
090GC	-	LC9009CB3TR090GC	Vdet-IC	0.9V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
090GN	-	BL8509-090GNRM	Vdet-IC	0.9V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
090GN	-	LC9009CB3TR090GN	Vdet-IC	0.9V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
091	-	SO642R	Si-npn	HV, Vid, 300V, 100mA, 310mW, B>25, 50MHz	SOT-23	16te	-	3a	Zx
095	-	AP6209-12GB	LVR-IC	LDO, 1.2V±2%, 250mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
095	-	AP6209-12PB	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-23	16cg	VR1	3b	Anw
098	-	AP6209-15GB	LVR-IC	LDO, 1.5V±2%, 250mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
098	-	AP6209-15PB	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-23	16cg	VR1	3b	Anw
09A	-	AP6209-18GB	LVR-IC	LDO, 1.8V±2%, 250mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
09A	-	AP6209-18PB	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-23	16cg	VR1	3b	Anw
09B	-	AP6209-BBGB	LVR-IC	LDO, 1.85V±2%, 250mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
09B	-	AP6209-BBPB	LVR-IC	LDO, 1.85V±2%, 250mA	SOT-23	16cg	VR1	3b	Anw
09D	-	AP6209-20GB	LVR-IC	LDO, 2.0V±2%, 250mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
09D	-	AP6209-20PB	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-23	16cg	VR1	3b	Anw
09E	-	AP6209-22GB	LVR-IC	LDO, 2.2V±2%, 250mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
09E	-	AP6209-22PB	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-23	16cg	VR1	3b	Anw
09G	-	AP6209-25GB	LVR-IC	LDO, 2.5V±2%, 250mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
09G	-	AP6209-25PB	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-23	16cg	VR1	3b	Anw
09J	-	AP6209-27GB	LVR-IC	LDO, 2.7V±2%, 250mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
09J	-	AP6209-27PB	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-23	16cg	VR1	3b	Anw
09J	-	FM809JS3X	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	F



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
09J	-	LSP2200CALJ	Vdet-IC	4.0V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Jbs
09J	-	UM809JS	Vdet-IC	4.0V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
09K	-	AP6209-28GB	LVR-IC	LDO, 2.8V±2%, 250mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
09K	-	AP6209-28PB	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-23	16cg	VR1	3b	Anw
09L	-	FM809LS3X	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	F
09L	-	LSP2200CALL	Vdet-IC	4.63V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Jbs
09L	-	UM809LS	Vdet-IC	4.63V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
09M	-	AP6209-30GB	LVR-IC	LDO, 3.0V±2%, 250mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
09M	-	AP6209-30PB	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-23	16cg	VR1	3b	Anw
09M	-	FM809MS3X	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	F
09M	-	LSP2200CALM	Vdet-IC	4.38V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Jbs
09M	-	UM809MS	Vdet-IC	4.38V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
09Q	-	AP6209-33GB	LVR-IC	LDO, 3.3V±2%, 250mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
09Q	-	AP6209-33PB	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-23	16cg	VR1	3b	Anw
09R	-	FM809RS3X	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	F
09R	-	LSP2200CALR	Vdet-IC	2.63V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Jbs
09R	-	UM809RS	Vdet-IC	2.63V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
09S	-	AP6209-42GB	LVR-IC	LDO, 4.2V±2%, 250mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
09S	-	AP6209-42PB	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-23	16cg	VR1	3b	Anw
09S	-	FM809SS3X	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	F
09S	-	LSP2200CALS	Vdet-IC	2.93V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Jbs
09S	-	UM809SS	Vdet-IC	2.93V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
09T	-	AP6209-35GB	LVR-IC	LDO, 3.5V±2%, 250mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
09T	-	AP6209-35PB	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-23	16cg	VR1	3b	Anw
09T	-	FM809TS3X	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	F
09T	-	LSP2200CALT	Vdet-IC	3.08V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Jbs
09T	-	UM809TS	Vdet-IC	3.08V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
09V	-	AP6209-36GB	LVR-IC	LDO, 3.6V±2%, 250mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
09V	-	AP6209-36PB	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-23	16cg	VR1	3b	Anw
09Z	-	AP6209-50GB	LVR-IC	LDO, 5.0V±2%, 250mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
09Z	-	AP6209-50PB	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-23	16cg	VR1	3b	Anw
09Z	-	LSP2200CALZ	Vdet-IC	2.35V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Jbs
09Z	-	UM809ZS	Vdet-IC	2.32V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
0A	-	DTC125TKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=100k	SOT-346	16ta	-	3a	Rhm
0A	-	DTC125TUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=200k	UMT3	16ta	-	3a	Rhm
0B	-	R3131N20EC	Vdet-IC	2V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
0C	-	R3131N30EC	Vdet-IC	3V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
0D	-	R3131N40EC	Vdet-IC	4V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
0D5	-	TC590302ECB	LVR-IC	LDO, -0.3V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
0E	-	R3131N26EC3	Vdet-IC	2.6V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
0E5	-	TC590402ECB	LVR-IC	LDO, -0.4V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
0F5	-	TC590502ECB	LVR-IC	LDO, -0.5V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
0G	-	R3131N20EA	Vdet-IC	2V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
0H	-	R3131N30EA	Vdet-IC	3V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
0H5	-	TC590602ECB	LVR-IC	LDO, -0.6V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
0J	-	R3131N40EA	Vdet-IC	4V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
0K	-	R3131N26EA3	Vdet-IC	2.6V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
0K5	-	TC590702ECB	LVR-IC	LDO, -0.7V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
0L	-	R3131N40AC	Vdet-IC	4V±1.5%, +Reset ODO, 50ms	SOT-23	16vdc	VD6	3b	Ric
0L5	-	TC590802ECB	LVR-IC	LDO, -0.8V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
0M	-	R3131N40BC	Vdet-IC	4V±1.5%, +Reset ODO, 100ms	SOT-23	16vdc	VD6	3b	Ric
0M5	-	TC590902ECB	LVR-IC	LDO, -0.9V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
0N	-	R3131N40DC	Vdet-IC	4V±1.5%, +Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Ric
0P	-	R3131N40HC	Vdet-IC	4V±1.5%, +Reset ODO, 400ms	SOT-23	16vdc	VD6	3b	Ric
0Q	-	R3131N40AA	Vdet-IC	4V±1.5%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3b	Ric
0R	-	R3131N40BA	Vdet-IC	4V±1.5%, +Reset PPO, 100ms	SOT-23	16vdc	VD7	3b	Ric
0S	-	R3131N40DA	Vdet-IC	4V±1.5%, +Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Ric
0T	-	R3131N40HA	Vdet-IC	4V±1.5%, +Reset PPO, 400ms	SOT-23	16vdc	VD7	3b	Ric
1	-	AX6904FA	Vdet-IC	2.63V±1.5%, +Reset PPO	SC-70	16vda	VD7	3b	Axl
1	cr	ELM7516NEB	Vdet-IC	1.6V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
1	cs	ELM7516CEB	Vdet-IC	1.6V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
1.8G	-	ZD1.8G-AE3	Z-diode	1.8V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
1.8L	-	ZD1.8L-AE3	Z-diode	1.8V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
10	-	1PS59SB10	Si-diode	Schottky, Sw, Fast, 30V, 200mA, Vf<0.8V(100mA), <5ns	SC-59	16dc	-	3a	Phi
10	-	AP8822C-50GA	Vdet-IC	5.0V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
10	-	AP8822C-50GT	Vdet-IC	5.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
10	-	AP8822C-50PA	Vdet-IC	5.0V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
10	-	AP8822C-50PT	Vdet-IC	5.0V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
10	-	ELM9710NBB	Vdet-IC	1.0V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
10	-	MAZW100H	SAZ-diode	Dual, 10V, 5mA, 150mW	SSSMini3	18df	-	3a	Pan



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
10	-	MRF9411	Si-npn	VHF/UHF, 20V, 50mA, 250mW, B=50..200, 8GHz	SOT-323	16ta	-	3a	Mot
10	-	PDTA143TEF	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k	SOT-490	18ta	-	3a	Nxp
10	-	TZT10W	Z-diode	9.40..10.60V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
10	-	Z02W10V	Z-diode	9.40..10.60V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
100	-	HZM10NB	Z-diode	9.45..10.55V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
100AC	-	BL8509-100ACRM	Vdet-IC	1.0V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
100AC	-	LC9009CB3TR100AC	Vdet-IC	1.0V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
100AN	-	BL8509-100ANRM	Vdet-IC	1.0V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
100AN	-	LC9009CB3TR100AN	Vdet-IC	1.0V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
100BC	-	BL8509-100BCRM	Vdet-IC	1.0V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
100BC	-	LC9009CB3TR100BC	Vdet-IC	1.0V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
100BN	-	BL8509-100BNRM	Vdet-IC	1.0V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
100BN	-	LC9009CB3TR100BN	Vdet-IC	1.0V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
100CC	-	BL8509-100CCRM	Vdet-IC	1.0V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
100CC	-	LC9009CB3TR100CC	Vdet-IC	1.0V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
100CN	-	BL8509-100CNRM	Vdet-IC	1.0V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
100CN	-	LC9009CB3TR100CN	Vdet-IC	1.0V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
100DC	-	BL8509-100DCRM	Vdet-IC	1.0V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
100DC	-	LC9009CB3TR100DC	Vdet-IC	1.0V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
100DN	-	BL8509-100DNRM	Vdet-IC	1.0V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
100DN	-	LC9009CB3TR100DN	Vdet-IC	1.0V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
100EC	-	BL8509-100ECRM	Vdet-IC	1.0V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
100EC	-	LC9009CB3TR100EC	Vdet-IC	1.0V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
100EN	-	BL8509-100ENRM	Vdet-IC	1.0V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
100EN	-	LC9009CB3TR100EN	Vdet-IC	1.0V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
100FC	-	BL8509-100FCRM	Vdet-IC	1.0V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
100FC	-	LC9009CB3TR100FC	Vdet-IC	1.0V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
100FN	-	BL8509-100FNRM	Vdet-IC	1.0V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
100FN	-	LC9009CB3TR100FN	Vdet-IC	1.0V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
100GC	-	BL8509-100GCRM	Vdet-IC	1.0V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
100GC	-	LC9009CB3TR100GC	Vdet-IC	1.0V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
100GN	-	BL8509-100GNRM	Vdet-IC	1.0V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
100GN	-	LC9009CB3TR100GN	Vdet-IC	1.0V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
101	-	PZM10NB1	Z-diode	10V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
101	ca	HZM10NB1	Z-diode	9.45..9.87V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
102	-	PZM10NB2	Z-diode	10V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
102	ca	HZM10NB2	Z-diode	9.77..10.21V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
103	-	PZM10NB3	Z-diode	10V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
103	ca	HZM10NB3	Z-diode	10.11..10.55V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
105	-	APL5101-12AI	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
105	-	APL5102-12AI	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
107	-	APL5101-13AI	LVR-IC	LDO, 1.3V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
108	-	APL5101-14AI	LVR-IC	LDO, 1.4V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
109	-	APL5101-15AI	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10A	-	APL5101-16AI	LVR-IC	LDO, 1.6V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10A	-	MA3100WA	Z-diode	Dual, 9.4..10.6V, If=100mA, Zzt=20Ω, 100mW	SC-59	16df	-	3a	Pan
10A	-	MAZ3100WA	Z-diode	Dual, 9.4..10.6V, If=100mA, Zzt=20Ω, 200mW	SC-59	16df	-	3a	Pan
10A	-	MMBZ10VA	TVS	Dual, Vrwm=6.5V, Vbr=9.50..10.5V, 1.7A, 24W(1ms)	SOT-23	16dg	-	3a	Wtr
10A	-	PZM10NB2A	Z-diode	Dual, 10V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
10A	-	ZXRE1004FF	Vref-IC	1.22V±3%, 0.08..20mA, <0.66Ω	SOT-23	16dk	RF1	3a	Zx
10B	-	APL5101-17AI	LVR-IC	LDO, 1.7V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10B	-	ZXRE1004EF	Vref-IC	1.22V±2%, 0.08..20mA, <0.6Ω	SOT-23	16dk	RF1	3a	Zx
10C	-	APL5101-18AI	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10C	-	ZXRE1004DF	Vref-IC	1.22V±1%, 0.08..20mA, <0.6Ω	SOT-23	16dk	RF1	3a	Zx
10D	-	APL5101-19AI	LVR-IC	LDO, 1.9V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10D	-	ZXRE1004CF	Vref-IC	1.22V±0.5%, 0.08..20mA, <0.6Ω	SOT-23	16dk	RF1	3a	Zx
10E	-	APL5101-20AI	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10F	-	APL5101-21AI	LVR-IC	LDO, 2.1V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10F	-	CH490DPT	Si-diode	SBD, 40V, 1A, Vf<0.53V(1A)	SOT-23	16dc	-	3a	Chm
10F	-	ZXRE4041FF	Vref-IC	1.225V±3%, 0.03..12mA, <0.66Ω	SOT-23	16dk	RF1	3a	Zx
10G	-	APL5101-22AI	LVR-IC	LDO, 2.2V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10G	-	ZD10G-AE3	Z-diode	10V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
10G	-	ZXRE4041EF	Vref-IC	1.225V±2%, 0.03..12mA, <0.66Ω	SOT-23	16dk	RF1	3a	Zx
10H	-	APL5101-23AI	LVR-IC	LDO, 2.3V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10H	-	BZX84C10-V	Z-diode	9.73..10.26V, Izt=5mA, Zzt=15Ω, 300mW	SOT-23	16dc	-	3f	Kec
10H	-	MAZ3100-H	Z-diode	9.4..10.6V, If=100mA, Zzt=20Ω, 200mW	SC-59	16dc	-	3a	Pan
10H	-	ZXRE4041DF	Vref-IC	1.225V±1%, 0.03..12mA, <0.66Ω	SOT-23	16dk	RF1	3a	Zx
10H10	-	SS10PH10	Si-diode	SBR, 100V, 10A, Vf<0.88V(10A)	TO-277A	76dh	-	3o	Vs
10H45	-	SS10PH45	Si-diode	SBR, 45V, 10A, Vf<0.72V(10A)	TO-277A	76dh	-	3o	Vs
10H9	-	SS10PH9	Si-diode	SBR, 90V, 10A, Vf<0.88V(10A)	TO-277A	76dh	-	3o	Vs



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
10I	-	APL5101-24AI	LVR-IC	LDO, 2.4V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10J	-	APL5101-25AI	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10J	-	FM810JS3X	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	F
10J	-	UM810JS	Vdet-IC	4.0V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
10J	-	ZXRE4041CF	Vref-IC	1.225V±0.5%, 0.03..12mA, <0.66Ω	SOT-23	16dk	RF1	3a	Zx
10K	-	APL5101-26AI	LVR-IC	LDO, 2.6V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10K	-	MA3100WK	Z-diode	Dual, 9.4..10.6V, If=100mA, Zzt=20Ω, 100mW	SC-59	16dg	-	3a	Pan
10K	-	MAZ3100WK	Z-diode	Dual, 9.4..10.6V, If=100mA, Zzt=20Ω, 200mW	SC-59	16dg	-	3a	Pan
10L	-	APL5101-27AI	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10L	-	FM810LS3X	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	F
10L	-	MAZ3100-L	Z-diode	9.4..10.6V, If=100mA, Zzt=20Ω, 200mW	SC-59	16dc	-	3a	Pan
10L	-	UM810LS	Vdet-IC	4.63V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
10L	-	ZD10L-AE3	Z-diode	10V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
10M	-	APL5101-28AI	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10M	-	FM810MS3X	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	F
10M	-	MAZ3100-M	Z-diode	9.4..10.6V, If=100mA, Zzt=20Ω, 200mW	SC-59	16dc	-	3a	Pan
10M	-	UM810MS	Vdet-IC	4.38V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
10N	-	APL5101-29AI	LVR-IC	LDO, 2.9V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10O	-	APL5101-30AI	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10P	-	APL5101-31AI	LVR-IC	LDO, 3.1V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10Q	-	APL5101-32AI	LVR-IC	LDO, 3.2V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10R	-	APL5101-33AI	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10R	-	FM810RS3X	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	F
10R	-	UM810RS	Vdet-IC	2.63V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
10S	-	APL5101-34AI	LVR-IC	LDO, 3.4V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10S	-	FM810SS3X	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	F
10S	-	UM810SS	Vdet-IC	2.93V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
10T	-	APL5101-35AI	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-23	16ch	VR1	3b	Anp
10T	-	CH491DPT	Si-diode	SBD, 25V, 1A, Vf<0.45V(1A)	SOT-23	16dc	-	3a	Chm
10T	-	FM810TS3X	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	F
10T	-	UM810TS	Vdet-IC	3.08V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
10V	-	CHPZ10VPT	Z-diode	Dual, 9.4..10.6V, Izt=5mA, Zzt=20Ω, 350mW	SOT-23	16df	-	3a	Chm
10V	-	PZM10NB	Z-diode	10V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
10W	-	CMSZDA27V	Z-diode	Dual, 25.1..28.9V, Zzt=80Ω, 6.2mA, 275mW	SOT-323	16df	-	3a	Cen
10X	-	02CZ10-X	Z-diode	9.40..9.93V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
10X	-	TZT10XW	Z-diode	9.40..9.93V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
10X	-	Z02W10VX	Z-diode	9.40..9.93V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
10Y	-	02CZ10-Y	Z-diode	9.73..10.26V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
10Y	-	TZT10YW	Z-diode	9.73..10.26V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
10Y	-	Z02W10VY	Z-diode	9.73..10.26V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
10Z	-	02CZ10-Z	Z-diode	10.06..10.6V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
10Z	-	CZ1W10	Z-diode	10V±5%, Izt=25mA, 600mW	SOT-23	16dc	-	3a	Cdi
10Z	-	MAZ9100H	SAZ-diode	Dual, 10V, Zzt=30Ω(5mA), 200mW	SC-59	16df	-	3a	Pan
10Z	-	MAZT100H	SAZ-diode	Dual, 10V, 5mA, 150mW	SC-89	18df	-	3a	Pan
10Z	-	TZT10ZW	Z-diode	10.06..10.60V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
10Z	-	UM810ZS	Vdet-IC	2.32V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
10Z	-	Z02W10VZ	Z-diode	10.06..10.60V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
11	-	AP8822C-51GA	Vdet-IC	5.1V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
11	-	AP8822C-51GT	Vdet-IC	5.1V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
11	-	AP8822C-51PA	Vdet-IC	5.1V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
11	-	AP8822C-51PT	Vdet-IC	5.1V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
11	-	CH715MCPT	Si-diode	Dual, SBD, 40V, 30mA, Vf<0.37V(1mA)	SOT-723	18df	-	3a	Chm
11	-	ELM9711NBB	Vdet-IC	1.1V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
11	-	MMBD1501	Si-diode	Sw, 180V, 200mA, Vf<1.5V(300mA), <4pF	SOT-23	16dc	-	3a	Nsc
11	-	MMBD1701	Si-diode	Fast, 30V, 150mA, 350mW, Vf<1.1V(50mA), 0.7ns	SOT-23	16dc	-	3a	Nsc
11	-	MMBD4148	Si-diode	Sw, Fast, 75V, 200mA, 350mW, <4ns, 4pF	SOT-23	16dc	-	3a	Nsc
11	-	MRF9511	Si-npn	VHF/UHF, 20V, 100mA, 322mW, B=50..200, 8GHz	SOT-323	16ta	-	3a	Mot
11	-	PDTA114TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1=10k	SOT-416	18ta	-	3a	Nxp
11	-	PDTA115TK	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=100k	SOT-346	16ta	-	3a	Nxp
11	-	PDTC143TEF	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k	SOT-490	18ta	-	3a	Nxp
11	-	TZT11W	Z-diode	10.40..11.60V, Izt=5.0mA, 200mW	SOT-23	16dc	-	3a	Ttr
11	-	Z02W11V	Z-diode	10.40..11.60V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
-11	-	PDTA114TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=10k	SOT-23	16ta	-	3a	NxH
-11	-	PDTA115TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=100k	SOT-23	16ta	-	3a	NxH
-11	-	PDTA115TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=100k	SOT-323	16ta	-	3a	NxH
110	-	HZM11NB	Z-diode	10.44..11.56V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
110	-	KTY82/110	Tdet-IC	Sensor, Rs=990..1010Ω(25°C, 1mA)	SOT-23	16ag	-	3a	Nxp
110AC	-	BL8509-110ACRM	Vdet-IC	1.1V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
110AC	-	LC9009CB3TR110AC	Vdet-IC	1.1V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
110AN	-	BL8509-110ANRM	Vdet-IC	1.1V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
110AN	-	LC9009CB3TR110AN	Vdet-IC	1.1V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
110BC	-	BL8509-110BCRM	Vdet-IC	1.1V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
110BC	-	LC9009CB3TR110BC	Vdet-IC	1.1V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
110BN	-	BL8509-110BNRM	Vdet-IC	1.1V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
110BN	-	LC9009CB3TR110BN	Vdet-IC	1.1V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
110CC	-	BL8509-110CCRM	Vdet-IC	1.1V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
110CC	-	LC9009CB3TR110CC	Vdet-IC	1.1V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
110CN	-	BL8509-110CNRM	Vdet-IC	1.1V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
110CN	-	LC9009CB3TR110CN	Vdet-IC	1.1V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
110DC	-	BL8509-110DCRM	Vdet-IC	1.1V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
110DC	-	LC9009CB3TR110DC	Vdet-IC	1.1V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
110DN	-	BL8509-110DNRM	Vdet-IC	1.1V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
110DN	-	LC9009CB3TR110DN	Vdet-IC	1.1V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
110EC	-	BL8509-110ECRM	Vdet-IC	1.1V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
110EC	-	LC9009CB3TR110EC	Vdet-IC	1.1V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
110EN	-	BL8509-110ENRM	Vdet-IC	1.1V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
110EN	-	LC9009CB3TR110EN	Vdet-IC	1.1V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
110FC	-	BL8509-110FCRM	Vdet-IC	1.1V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
110FC	-	LC9009CB3TR110FC	Vdet-IC	1.1V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
110FN	-	BL8509-110FNRM	Vdet-IC	1.1V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
110FN	-	LC9009CB3TR110FN	Vdet-IC	1.1V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
110GC	-	BL8509-110GCRM	Vdet-IC	1.1V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
110GC	-	LC9009CB3TR110GC	Vdet-IC	1.1V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
110GN	-	BL8509-110GNRM	Vdet-IC	1.1V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
110GN	-	LC9009CB3TR110GN	Vdet-IC	1.1V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
111	-	DTA113ZUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=1k/10k	UMT3	16ta	-	3a	Rhm
111	-	PZM11NB1	Z-diode	11V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
111	-	SST111	n-FET	Sw, 35V, 350mW, Idss=20mA, Rds(on)=30Ω, 2/6ns	SOT-23	16fj	-	3a	Cal
111	ca	HZM11NB1	Z-diode	10.44..10.88V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
112	-	PZM11NB2	Z-diode	11V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
112	-	SST112	n-FET	Sw, 35V, 350mW, Idss=5mA, Rds(on)=50Ω, 2/6ns	SOT-23	16fj	-	3a	Cal
112	ca	HZM11NB2	Z-diode	10.76..11.22V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
113	-	DTA143ZUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/47k	UMT3	16ta	-	3a	Rhm
113	-	PZM11NB3	Z-diode	11V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
113	-	SST113	n-FET	Sw, 35V, 350mW, Idss=2mA, Rds(on)=100Ω, 2/6ns	SOT-23	16fj	-	3a	Cal
113	ca	HZM11NB3	Z-diode	11.1..11.56V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
115	-	2STR1215	Si-npn	Sw, 15V, 1.5A, 500mW, B=200..560, 60/310ns	SOT-23	16ta	-	3a	Ste
118A	-	AAT60118A-S14	Vdet-IC	1.8V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
118A	-	AAT60118A-S2	Vdet-IC	1.8V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
118B	-	AAT60118B-S14	Vdet-IC	1.8V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
118B	-	AAT60118B-S2	Vdet-IC	1.8V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
118C	-	AAT60118C-S14	Vdet-IC	1.8V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
118C	-	AAT60118C-S2	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
118D	-	AAT60118D-S14	Vdet-IC	1.8V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
118D	-	AAT60118D-S2	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
119A	-	AAT60119A-S14	Vdet-IC	1.9V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
119A	-	AAT60119A-S2	Vdet-IC	1.9V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
119B	-	AAT60119B-S14	Vdet-IC	1.9V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
119B	-	AAT60119B-S2	Vdet-IC	1.9V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
119C	-	AAT60119C-S14	Vdet-IC	1.9V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
119C	-	AAT60119C-S2	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
119D	-	AAT60119D-S14	Vdet-IC	1.9V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
119D	-	AAT60119D-S2	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
11A	-	APR3011-15A	Vdet-IC	1.5V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Anp
11A	-	PZM11NB2A	Z-diode	Dual, 11V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
11B	-	APR3011-17A	Vdet-IC	1.75V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Anp
11C	-	APR3011-23A	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Anp
11D	-	APR3011-26A	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Anp
11E	-	APR3011-29A	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Anp
11F	-	APR3011-30A	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Anp
11G	-	APR3011-39A	Vdet-IC	3.9V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Anp
11G	-	ZD11G-AE3	Z-diode	11V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
11H	-	APR3011-43A	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Anp
11H	-	BZX84C11-V	Z-diode	10.73..11.26V, Izt=5mA, Zzt=15Ω, 300mW	SOT-23	16dc	-	3f	Kec
11H	-	MAZ3110-H	Z-diode	10.4..11.6V, If=100mA, Zzt=20Ω, 200mW	SC-59	16dc	-	3a	Pan
11J	-	APR3011-46A	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Anp
11L	-	MAZ3110-L	Z-diode	10.4..11.6V, If=100mA, Zzt=20Ω, 200mW	SC-59	16dc	-	3a	Pan
11L	-	ZD11L-AE3	Z-diode	11V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
11M	-	MAZ3110-M	Z-diode	10.4..11.6V, If=100mA, Zzt=20Ω, 200mW	SC-59	16dc	-	3a	Pan
11V	-	CHPZ11VPT	Z-diode	Dual, 10.4..11.6V, Izt=5mA, Zzt=20Ω, 350mW	SOT-23	16df	-	3a	Chm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
11V	-	PZM11NB	Z-diode	11V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
11W	-	CMSZDA30V	Z-diode	Dual, 28.0..32.0V, Zzt=80Ω, 5.6mA, 275mW	SOT-323	16df	-	3a	Cen
11X	-	02CZ11-X	Z-diode	10.4..10.98V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
11X	-	TZT11XW	Z-diode	10.40..10.98V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
11X	-	Z02W11VX	Z-diode	10.40..0.98V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
11Y	-	02CZ11-Y	Z-diode	10.73..11.26V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
11Y	-	TZT11YW	Z-diode	10.73..11.26V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
11Y	-	Z02W11VY	Z-diode	10.73..11.26V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
11Z	-	02CZ11-Z	Z-diode	11.06..11.6V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
11Z	-	CZ1W11	Z-diode	11V±5%, Izt=23mA, 600mW	SOT-23	16dc	-	3a	Cdi
11Z	-	TZT11ZW	Z-diode	11.06..11.60V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
11Z	-	Z02W11VZ	Z-diode	11.06..11.60V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
12	-	AP8822C-52GA	Vdet-IC	5.2V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
12	-	AP8822C-52GT	Vdet-IC	5.2V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
12	-	AP8822C-52PA	Vdet-IC	5.2V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
12	-	AP8822C-52PT	Vdet-IC	5.2V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
12	-	DTA123EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2k2/2k2	SOT-416	16ta	-	3a	Rhm
12	-	DTA123EKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/2k2	SOT-346	16ta	-	3a	Rhm
12	-	DTA123EM	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2k2/2k2	VMT3	18ta	-	3a	Rhm
12	-	DTA123EUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/2k2	UMT3	16ta	-	3a	Rhm
12	-	ELM9712NBB	Vdet-IC	1.2V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
12	-	MAZW120H	SAZ-diode	Dual, 12V, 5mA, 150mW	SSSMini3	18df	-	3a	Pan
12	-	MSCT12	TVS	Vrwm=12V, 300W (8/20µs)	SOT-23	16dh	-	3a	Msp
12	-	PDTA115TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1=100k	SOT-416	18ta	-	3a	Nxp
12	-	PDTA144VK	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/10k	SC-59	16ta	-	3a	Nxp
12	-	PDTC114YEF	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k	SOT-490	18ta	-	3a	Nxp
12	-	TZT12W	Z-diode	11.40..12.60V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
12	-	Z02W12V	Z-diode	11.40..12.60V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
-12	-	PDTA144VU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	SOT-323	16ta	-	3a	NxH
-12	-	PDTC114TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=10k	SOT-23	16ta	-	3a	NxH
120	-	HZM12NB	Z-diode	11.42..12.6V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
120	-	KTY82/120	Tdet-IC	Sensor, Rs=980..1020Ω(25°C, 1mA)	SOT-23	16ag	-	3a	Nxp
120A	-	AAT60120A-S14	Vdet-IC	2.0V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
120A	-	AAT60120A-S2	Vdet-IC	2.0V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
120AC	-	BL8509-120ACRM	Vdet-IC	1.2V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
120AC	-	LC9009CB3TR120AC	Vdet-IC	1.2V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
120AN	-	BL8509-120ANRM	Vdet-IC	1.2V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
120AN	-	LC9009CB3TR120AN	Vdet-IC	1.2V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
120B	-	AAT60120B-S14	Vdet-IC	2.0V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
120B	-	AAT60120B-S2	Vdet-IC	2.0V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
120BC	-	BL8509-120BCRM	Vdet-IC	1.2V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
120BC	-	LC9009CB3TR120BC	Vdet-IC	1.2V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
120BN	-	BL8509-120BNRM	Vdet-IC	1.2V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
120BN	-	LC9009CB3TR120BN	Vdet-IC	1.2V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
120C	-	AAT60120C-S14	Vdet-IC	2.0V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
120C	-	AAT60120C-S2	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
120CC	-	BL8509-120CCRM	Vdet-IC	1.2V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
120CC	-	LC9009CB3TR120CC	Vdet-IC	1.2V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
120CN	-	BL8509-120CNRM	Vdet-IC	1.2V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
120CN	-	LC9009CB3TR120CN	Vdet-IC	1.2V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
120D	-	AAT60120D-S14	Vdet-IC	2.0V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
120D	-	AAT60120D-S2	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
120DC	-	BL8509-120DCRM	Vdet-IC	1.2V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
120DC	-	LC9009CB3TR120DC	Vdet-IC	1.2V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
120DN	-	BL8509-120DNRM	Vdet-IC	1.2V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
120DN	-	LC9009CB3TR120DN	Vdet-IC	1.2V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
120EC	-	BL8509-120ECRM	Vdet-IC	1.2V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
120EC	-	LC9009CB3TR120EC	Vdet-IC	1.2V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
120EN	-	BL8509-120ENRM	Vdet-IC	1.2V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
120EN	-	LC9009CB3TR120EN	Vdet-IC	1.2V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
120FC	-	BL8509-120FCRM	Vdet-IC	1.2V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
120FC	-	LC9009CB3TR120FC	Vdet-IC	1.2V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
120FN	-	BL8509-120FNRM	Vdet-IC	1.2V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
120FN	-	LC9009CB3TR120FN	Vdet-IC	1.2V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
120GC	-	BL8509-120GCRM	Vdet-IC	1.2V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
120GC	-	LC9009CB3TR120GC	Vdet-IC	1.2V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
120GN	-	BL8509-120GNRM	Vdet-IC	1.2V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
120GN	-	LC9009CB3TR120GN	Vdet-IC	1.2V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
121	-	DTC113ZUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=1k/10k	UMT3	16ta	-	3a	Rhm
121	-	KTY82/121	Tdet-IC	Sensor, Rs=980..1000Ω(25°C, 1mA)	SOT-23	16ag	-	3a	Nxp



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
121	-	PZM12NB1	Z-diode	12V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
121	ca	HZM12NB1	Z-diode	11.42..11.9V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
121A	-	AAT60121A-S14	Vdet-IC	2.1V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
121A	-	AAT60121A-S2	Vdet-IC	2.1V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
121B	-	AAT60121B-S14	Vdet-IC	2.1V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
121B	-	AAT60121B-S2	Vdet-IC	2.1V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
121C	-	AAT60121C-S14	Vdet-IC	2.1V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
121C	-	AAT60121C-S2	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
121D	-	AAT60121D-S14	Vdet-IC	2.1V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
121D	-	AAT60121D-S2	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
122	-	KTY82/122	Tdet-IC	Sensor, Rs=1000..1020Ω(25°C, 1mA)	SOT-23	16ag	-	3a	Nxp
122	-	PZM12NB2	Z-diode	12V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
122	ca	HZM12NB2	Z-diode	11.74..12.24V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
122A	-	AAT60122A-S14	Vdet-IC	2.2V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
122A	-	AAT60122A-S2	Vdet-IC	2.2V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
122B	-	AAT60122B-S14	Vdet-IC	2.2V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
122B	-	AAT60122B-S2	Vdet-IC	2.2V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
122C	-	AAT60122C-S14	Vdet-IC	2.2V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
122C	-	AAT60122C-S2	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
122D	-	AAT60122D-S14	Vdet-IC	2.2V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
122D	-	AAT60122D-S2	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
123	-	PZM12NB3	Z-diode	12V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
123	-	STD123UF	Si-npn	Hi-beta, Lo-sat, 20V, 1A, 200mW, B>150, 260MHz	SOT-23F	18ta	-	3a	Auk
123	ca	HZM12NB3	Z-diode	12.08..12.6V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
123A	-	AAT60123A-S14	Vdet-IC	2.3V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
123A	-	AAT60123A-S2	Vdet-IC	2.3V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
123B	-	AAT60123B-S14	Vdet-IC	2.3V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
123B	-	AAT60123B-S2	Vdet-IC	2.3V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
123C	-	AAT60123C-S14	Vdet-IC	2.3V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
123C	-	AAT60123C-S2	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
123D	-	AAT60123D-S14	Vdet-IC	2.3V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
123D	-	AAT60123D-S2	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
124	-	STA124SF	Si-pnp	Hi-beta, 15V, 1A, 350mW, B=200..450, 260MHz	SOT-23F	18ta	-	3a	Auk
124A	-	AAT60124A-S14	Vdet-IC	2.4V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
124A	-	AAT60124A-S2	Vdet-IC	2.4V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
124B	-	AAT60124B-S14	Vdet-IC	2.4V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
124B	-	AAT60124B-S2	Vdet-IC	2.4V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
124C	-	AAT60124C-S14	Vdet-IC	2.4V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
124C	-	AAT60124C-S2	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
124D	-	AAT60124D-S14	Vdet-IC	2.4V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
124D	-	AAT60124D-S2	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
124S	-	SS12P4S	Si-diode	SBR, 40V, 12A, Vf<0.60V(10A)	TO-277A	76dg	-	3o	Vs
125A	-	AAT60125A-S14	Vdet-IC	2.5V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
125A	-	AAT60125A-S2	Vdet-IC	2.5V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
125B	-	AAT60125B-S14	Vdet-IC	2.5V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
125B	-	AAT60125B-S2	Vdet-IC	2.5V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
125C	-	AAT60125C-S14	Vdet-IC	2.5V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
125C	-	AAT60125C-S2	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
125D	-	AAT60125D-S14	Vdet-IC	2.5V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
125D	-	AAT60125D-S2	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
126A	-	AAT60126A-S14	Vdet-IC	2.6V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
126A	-	AAT60126A-S2	Vdet-IC	2.6V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
126B	-	AAT60126B-S14	Vdet-IC	2.6V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
126B	-	AAT60126B-S2	Vdet-IC	2.6V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
126C	-	AAT60126C-S14	Vdet-IC	2.6V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
126C	-	AAT60126C-S2	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
126D	-	AAT60126D-S14	Vdet-IC	2.6V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
126D	-	AAT60126D-S2	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
127A	-	AAT60127A-S14	Vdet-IC	2.7V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
127A	-	AAT60127A-S2	Vdet-IC	2.7V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
127B	-	AAT60127B-S14	Vdet-IC	2.7V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
127B	-	AAT60127B-S2	Vdet-IC	2.7V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
127C	-	AAT60127C-S14	Vdet-IC	2.7V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
127C	-	AAT60127C-S2	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
127D	-	AAT60127D-S14	Vdet-IC	2.7V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
127D	-	AAT60127D-S2	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
128A	-	AAT60128A-S14	Vdet-IC	2.8V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
128A	-	AAT60128A-S2	Vdet-IC	2.8V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
128B	-	AAT60128B-S14	Vdet-IC	2.8V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
128B	-	AAT60128B-S2	Vdet-IC	2.8V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
128C	-	AAT60128C-S14	Vdet-IC	2.8V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
128C	-	AAT60128C-S2	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
128D	-	AAT60128D-S14	Vdet-IC	2.8V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
128D	-	AAT60128D-S2	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
129A	-	AAT60129A-S14	Vdet-IC	2.9V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
129A	-	AAT60129A-S2	Vdet-IC	2.9V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
129B	-	AAT60129B-S14	Vdet-IC	2.9V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
129B	-	AAT60129B-S2	Vdet-IC	2.9V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
129C	-	AAT60129C-S14	Vdet-IC	2.9V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
129C	-	AAT60129C-S2	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
129D	-	AAT60129D-S14	Vdet-IC	2.9V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
129D	-	AAT60129D-S2	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
12A	-	APR3012-15A	Vdet-IC	1.5V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Anp
12A	-	MAZ3120WA	Z-diode	Dual, 11.4..12.7V, If=100mA, Zzt=25Ω, 200mW	SC-59	16df	-	3a	Pan
12A	-	MMBZ12VA	TVS	Dual, Vrwm=8.5V, Vbr=11.40..12.60V, 2.35A, 40W(1ms)	SOT-23	16dg	-	3a	Wtr
12A	-	PZM12NB2A	Z-diode	Dual, 12V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
12A	-	STD123ASF	Si-npn	Hi-beta, Lo-sat, 10V, 1A, 350mW, B>400, 260MHz	SOT-23F	18ta	-	3a	Auk
12B	-	APR3002-17A	Vdet-IC	1.75V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Anp
12B	-	APR3012-17A	Vdet-IC	1.75V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Anp
12C	-	APR3012-23A	Vdet-IC	2.32V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Anp
12C	-	MSCT12C	TVS	Dual, Vrwm=12V, 300W (8/20µs), Bidir.	SOT-23	16dp	-	3a	Msp
12C	-	TVS2312PT	TVS	Dual, Vbr=13.3V, Vrwm=12V, 1A, 300W(1ms)	SOT-23	16df	-	3a	Chm
12D	-	APR3012-26A	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Anp
12D	-	RB491D	Si-diode	SBR, 25V, 1A, Vf<0.45V(1A)	SOT-23	16dc	-	3i	Pjt
12E	-	APR3012-29A	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Anp
12E	-	ZC2812E	Si-diode	Dual, Schottky, 15V, Vf<0.41V, Cd<1.2pF	SOT-23	16dg	-	3a	Zx
12F	-	APR3012-30A	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Anp
12F	-	ZXRE125FF	Vref-IC	1.22V±3%, 0.03..5mA, <0.66Ω	SOT-23	16dk	RF1	3a	Zx
12G	-	APR3012-39A	Vdet-IC	3.9V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Anp
12G	-	ZD12G-AE3	Z-diode	12V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
12G	-	ZXRE125EF	Vref-IC	1.22V±2%, 0.03..5mA, <0.66Ω	SOT-23	16dk	RF1	3a	Zx
12H	-	APR3012-43A	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Anp
12H	-	BZX84C12-V	Z-diode	11.73..12.26V, Izt=5mA, Zzt=15Ω, 300mW	SOT-23	16dc	-	3f	Kec
12H	-	MAZ3120-H	Z-diode	11.4..12.7V, If=100mA, Zzt=25Ω, 200mW	SC-59	16dc	-	3a	Pan
12H	-	ZXRE125DF	Vref-IC	1.22V±1%, 0.03..5mA, <0.66Ω	SOT-23	16dk	RF1	3a	Zx
12J	-	APR3012-46A	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Anp
12J	-	ZXRE125CF	Vref-IC	1.22V±0.5%, 0.03..5mA, <0.66Ω	SOT-23	16dk	RF1	3a	Zx
12L	-	CESD12VCP	ESDP-diode	Dual, Vbr=13.3..15.75V, Vrwm=12V, Ipp=11.2A, 300W(1ms)	SOT-23	16dg	-	3a	Jce
12L	-	MAZ3120-L	Z-diode	11.4..12.7V, If=100mA, Zzt=25Ω, 200mW	SC-59	16dc	-	3a	Pan
12L	-	ZD12L-AE3	Z-diode	12V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
12M	-	CESD12VAP	ESDP-diode	Dual, Vbr=13.3..15.75V, Vrwm=12V, Ipp=11.2A, 300W(1ms)	SOT-23	16df	-	3a	Jce
12M	-	MAZ3120-M	Z-diode	11.4..12.7V, If=100mA, Zzt=25Ω, 200mW	SC-59	16dc	-	3a	Pan
12V	-	CHPZ12VPT	Z-diode	Dual, 11.4..12.7V, Izt=5mA, Zzt=25Ω, 350mW	SOT-23	16df	-	3a	Chm
12V	-	PZM12NB	Z-diode	12V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
12W	-	CMSZDA33V	Z-diode	Dual, 31.0..35.0V, Zzt=80Ω, 5.0mA, 275mW	SOT-323	16df	-	3a	Cen
12X	-	02CZ12-X	Z-diode	11.4..11.93V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
12X	-	TZT12XW	Z-diode	11.40..11.93V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
12X	-	Z02W12VX	Z-diode	11.40..11.93V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
12Y	-	02CZ12-Y	Z-diode	11.73..12.26V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
12Y	-	TZT12YW	Z-diode	11.73..12.26V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
12Y	-	Z02W12VY	Z-diode	11.73..12.26V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
12Z	-	02CZ12-Z	Z-diode	12.06..12.6V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
12Z	-	CZ1W12	Z-diode	12V±5%, Izt=21mA, 600mW	SOT-23	16dc	-	3a	Cdi
12Z	-	MAZ9120H	SAZ-diode	Dual, 12V, Zzt=30Ω(5mA), 200mW	SC-59	16df	-	3a	Pan
12Z	-	MAZT120H	SAZ-diode	Dual, 12V, 5mA, 150mW	SC-89	18df	-	3a	Pan
12Z	-	TZT12ZW	Z-diode	12.06..12.60V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
12Z	-	Z02W12VZ	Z-diode	12.06..12.60V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
13	-	AP8822C-53GA	Vdet-IC	5.3V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
13	-	AP8822C-53GT	Vdet-IC	5.3V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
13	-	AP8822C-53PA	Vdet-IC	5.3V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
13	-	AP8822C-53PT	Vdet-IC	5.3V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
13	-	DTA143EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/4k7	SOT-416	16ta	-	3a	Rhm
13	-	DTA143EKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/4k7	SOT-346	16ta	-	3a	Rhm
13	-	DTA143EM	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/4k7	VMT3	18ta	-	3a	Rhm
13	-	DTA143EUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/4k7	UMT3	16ta	-	3a	Rhm
13	-	ELM9713NBB	Vdet-IC	1.3V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
13	-	MMBD1503	Si-diode	Dua 180V, 200mA, Vf<1.5V(300mA), <4pF	SOT-23	16dl	-	3a	Nsc
13	-	MMBD1703	Si-diode	Dual, Fast, 30V, 150mA, 350mW, Vf<1.1V(50mA), 0.7ns	SOT-23	16dl	-	3a	Nsc
13	-	MMBD4148CA	Si-diode	Dual, Sw, Fast, 75V, 200mA, 350mW, <4ns, 4pF	SOT-23	16df	-	3a	Nsc
13	-	PDTA123YK	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	SOT-346	16ta	-	3a	Nxp





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
13	-	PDTA144VE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=47k/10k	SOT-416	16ta	-	3a	Nxp
13	-	TZT13W	Z-diode	12.40..14.10V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
13	-	Z02W13V	Z-diode	12.40..14.10V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
-13	-	PDTA123YU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	SOT-323	16ta	-	3a	NxH
130	-	HZM13NB	Z-diode	12.47..13.96V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
130A	-	AAT60130A-S14	Vdet-IC	3.0V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
130A	-	AAT60130A-S2	Vdet-IC	3.0V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
130AC	-	BL8509-130ACRM	Vdet-IC	1.3V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
130AC	-	LC9009CB3TR130AC	Vdet-IC	1.3V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
130AN	-	BL8509-130ANRM	Vdet-IC	1.3V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
130AN	-	LC9009CB3TR130AN	Vdet-IC	1.3V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
130B	-	AAT60130B-S14	Vdet-IC	3.0V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
130B	-	AAT60130B-S2	Vdet-IC	3.0V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
130BC	-	BL8509-130BCRM	Vdet-IC	1.3V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
130BC	-	LC9009CB3TR130BC	Vdet-IC	1.3V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
130BN	-	BL8509-130BNRM	Vdet-IC	1.3V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
130BN	-	LC9009CB3TR130BN	Vdet-IC	1.3V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
130C	-	AAT60130C-S14	Vdet-IC	3.0V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
130C	-	AAT60130C-S2	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
130CC	-	BL8509-130CCRM	Vdet-IC	1.3V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
130CC	-	LC9009CB3TR130CC	Vdet-IC	1.3V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
130CN	-	BL8509-130CNRM	Vdet-IC	1.3V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
130CN	-	LC9009CB3TR130CN	Vdet-IC	1.3V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
130D	-	AAT60130D-S14	Vdet-IC	3.0V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
130D	-	AAT60130D-S2	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
130DC	-	BL8509-130DCRM	Vdet-IC	1.3V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
130DC	-	LC9009CB3TR130DC	Vdet-IC	1.3V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
130DN	-	BL8509-130DNRM	Vdet-IC	1.3V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
130DN	-	LC9009CB3TR130DN	Vdet-IC	1.3V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
130EC	-	BL8509-130ECRM	Vdet-IC	1.3V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
130EC	-	LC9009CB3TR130EC	Vdet-IC	1.3V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
130EN	-	BL8509-130ENRM	Vdet-IC	1.3V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
130EN	-	LC9009CB3TR130EN	Vdet-IC	1.3V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
130FC	-	BL8509-130FCRM	Vdet-IC	1.3V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
130FC	-	LC9009CB3TR130FC	Vdet-IC	1.3V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
130FN	-	BL8509-130FNRM	Vdet-IC	1.3V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
130FN	-	LC9009CB3TR130FN	Vdet-IC	1.3V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
130GC	-	BL8509-130GCRM	Vdet-IC	1.3V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
130GC	-	LC9009CB3TR130GC	Vdet-IC	1.3V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
130GN	-	BL8509-130GNRM	Vdet-IC	1.3V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
130GN	-	LC9009CB3TR130GN	Vdet-IC	1.3V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
131	-	PZM13NB1	Z-diode	13V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
131	ca	HZM13NB1	Z-diode	12.47..13.03V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
131A	-	AAT60131A-S14	Vdet-IC	3.1V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
131A	-	AAT60131A-S2	Vdet-IC	3.1V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
131B	-	AAT60131B-S14	Vdet-IC	3.1V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
131B	-	AAT60131B-S2	Vdet-IC	3.1V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
131C	-	AAT60131C-S14	Vdet-IC	3.1V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
131C	-	AAT60131C-S2	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
131D	-	AAT60131D-S14	Vdet-IC	3.1V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
131D	-	AAT60131D-S2	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
132	-	DTA123JE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2k2/47k	SOT-416	16ta	-	3a	Rhm
132	-	DTA123JM	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2k2/47k	VMT3	18ta	-	3a	Rhm
132	-	DTA123JUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/47k	UMT3	16ta	-	3a	Rhm
132	-	PZM13NB2	Z-diode	13V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
132	ca	HZM13NB2	Z-diode	12.47..13.03V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
132A	-	AAT60132A-S14	Vdet-IC	3.2V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
132A	-	AAT60132A-S2	Vdet-IC	3.2V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
132B	-	AAT60132B-S14	Vdet-IC	3.2V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
132B	-	AAT60132B-S2	Vdet-IC	3.2V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
132C	-	AAT60132C-S14	Vdet-IC	3.2V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
132C	-	AAT60132C-S2	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
132D	-	AAT60132D-S14	Vdet-IC	3.2V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
132D	-	AAT60132D-S2	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
133	-	PZM13NB3	Z-diode	13V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
133	ca	HZM13NB3	Z-diode	13.37..13.96V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
133A	-	AAT60133A-S14	Vdet-IC	3.3V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
133A	-	AAT60133A-S2	Vdet-IC	3.3V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
133B	-	AAT60133B-S14	Vdet-IC	3.3V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
133B	-	AAT60133B-S2	Vdet-IC	3.3V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
133C	-	AAT60133C-S14	Vdet-IC	3.3V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
133C	-	AAT60133C-S2	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
133D	-	AAT60133D-S14	Vdet-IC	3.3V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
133D	-	AAT60133D-S2	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
134A	-	AAT60134A-S14	Vdet-IC	3.4V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
134A	-	AAT60134A-S2	Vdet-IC	3.4V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
134B	-	AAT60134B-S14	Vdet-IC	3.4V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
134B	-	AAT60134B-S2	Vdet-IC	3.4V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
134C	-	AAT60134C-S14	Vdet-IC	3.4V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
134C	-	AAT60134C-S2	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
134D	-	AAT60134D-S14	Vdet-IC	3.4V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
134D	-	AAT60134D-S2	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
135A	-	AAT60135A-S14	Vdet-IC	3.5V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
135A	-	AAT60135A-S2	Vdet-IC	3.5V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
135B	-	AAT60135B-S14	Vdet-IC	3.5V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
135B	-	AAT60135B-S2	Vdet-IC	3.5V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
135C	-	AAT60135C-S14	Vdet-IC	3.5V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
135C	-	AAT60135C-S2	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
135D	-	AAT60135D-S14	Vdet-IC	3.5V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
135D	-	AAT60135D-S2	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
136A	-	AAT60136A-S14	Vdet-IC	3.6V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
136A	-	AAT60136A-S2	Vdet-IC	3.6V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
136B	-	AAT60136B-S14	Vdet-IC	3.6V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
136B	-	AAT60136B-S2	Vdet-IC	3.6V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
136C	-	AAT60136C-S14	Vdet-IC	3.6V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
136C	-	AAT60136C-S2	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
136D	-	AAT60136D-S14	Vdet-IC	3.6V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
136D	-	AAT60136D-S2	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
137A	-	AAT60137A-S14	Vdet-IC	3.7V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
137A	-	AAT60137A-S2	Vdet-IC	3.7V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
137B	-	AAT60137B-S14	Vdet-IC	3.7V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
137B	-	AAT60137B-S2	Vdet-IC	3.7V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
137C	-	AAT60137C-S14	Vdet-IC	3.7V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
137C	-	AAT60137C-S2	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
137D	-	AAT60137D-S14	Vdet-IC	3.7V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
137D	-	AAT60137D-S2	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
138A	-	AAT60138A-S14	Vdet-IC	3.8V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
138A	-	AAT60138A-S2	Vdet-IC	3.8V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
138B	-	AAT60138B-S14	Vdet-IC	3.8V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
138B	-	AAT60138B-S2	Vdet-IC	3.8V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
138C	-	AAT60138C-S14	Vdet-IC	3.8V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
138C	-	AAT60138C-S2	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
138D	-	AAT60138D-S14	Vdet-IC	3.8V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
138D	-	AAT60138D-S2	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
139A	-	AAT60139A-S14	Vdet-IC	3.9V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
139A	-	AAT60139A-S2	Vdet-IC	3.9V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
139B	-	AAT60139B-S14	Vdet-IC	3.9V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
139B	-	AAT60139B-S2	Vdet-IC	3.9V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
139C	-	AAT60139C-S14	Vdet-IC	3.9V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
139C	-	AAT60139C-S2	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
139D	-	AAT60139D-S14	Vdet-IC	3.9V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
139D	-	AAT60139D-S2	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
13A	-	APR3013-15A	Vdet-IC	1.5V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Anp
13A	-	MAZ3130WA	Z-diode	Dual, 12.4..14.1V, If=100mA, Zzt=30Ω, 200mW	SC-59	16df	-	3a	Pan
13A	-	PZM13NB2A	Z-diode	Dual, 13V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
13B	-	APR3013-17A	Vdet-IC	1.75V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Anp
13C	-	APR3013-23A	Vdet-IC	2.32V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Anp
13D	-	APR3013-26A	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Anp
13E	-	APR3013-29A	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Anp
13E	-	ZC2813E	Si-diode	Dual, RF, Schottky, 15V, Vf<0.41V, Cd<1.2pF	SOT-23	16df	-	3a	Zx
13F	-	APR3013-30A	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Anp
13G	-	APR3013-39A	Vdet-IC	3.9V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Anp
13G	-	ZD13G-AE3	Z-diode	13V±5%, Zzt=37Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
13H	-	APR3013-43A	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Anp
13H	-	BZX84C13-V	Z-diode	12.88..13.57V, Izt=5mA, Zzt=15Ω, 300mW	SOT-23	16dc	-	3f	Kec
13H	-	MAZ3130-H	Z-diode	12.4..14.1V, If=100mA, Zzt=30Ω, 200mW	SC-59	16dc	-	3a	Pan
13J	-	APR3013-46A	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Anp
13L	-	MAZ3130-L	Z-diode	12.4..14.1V, If=100mA, Zzt=30Ω, 200mW	SC-59	16dc	-	3a	Pan
13L	-	ZD13L-AE3	Z-diode	13V±5%, Zzt=37Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
13M	-	MAZ3130-M	Z-diode	12.4..14.1V, If=100mA, Zzt=30Ω, 200mW	SC-59	16dc	-	3a	Pan



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
13P	-	9013PLT1	Si-npn	GP, 40V, 500mA, 225mW, B=100..200	SOT-23	16ta	-	3a	Wil
13P	-	L9013PLT1	Si-npn	GP, 40V, 500mA, 225mW, B=100..200	SOT-23	16ta	-	3a	Lrc
13Q	-	9013QLT1	Si-npn	GP, 40V, 500mA, 225mW, B=150..300	SOT-23	16ta	-	3a	Wil
13Q	-	L9013QLT1	Si-npn	GP, 40V, 500mA, 225mW, B=150..300	SOT-23	16ta	-	3a	Lrc
13R	-	9013RLT1	Si-npn	GP, 40V, 500mA, 225mW, B=200..400	SOT-23	16ta	-	3a	Wil
13R	-	L9013RLT1	Si-npn	GP, 40V, 500mA, 225mW, B=200..400	SOT-23	16ta	-	3a	Lrc
13s	-	BAS125	Si-diode	Schottky, 25V, 100mA, Vf<0.9V(35mA), Cd<1.1pF	SOT-23	16dc	-	3c	Inf
13s	-	BAS125W	Si-diode	Schottky, 25V, 100mA, Vf<0.9V(35mA), Cd<1.1pF	SOT-323	16dc	-	3c	Inf
13S	-	9013SLT1	Si-npn	GP, 40V, 500mA, 225mW, B=300..600	SOT-23	16ta	-	3a	Wil
13S	-	L9013SLT1	Si-npn	GP, 40V, 500mA, 225mW, B=300..600	SOT-23	16ta	-	3a	Lrc
13V	-	CHPZ13VPT	Z-diode	Dual, 12.4..14.1V, Izt=5mA, Zzt=30Ω, 350mW	SOT-23	16df	-	3a	Chm
13V	-	PZM13NB	Z-diode	13V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
13W	-	CMSZDA36V	Z-diode	Dual, 34.0..38.0V, Zzt=90Ω, 4.6mA, 275mW	SOT-323	16df	-	3a	Cen
13X	-	02CZ13-X	Z-diode	12.4..13.08V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
13X	-	TZT13XW	Z-diode	12.40..13.08V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
13X	-	Z02W13VX	Z-diode	12.40..13.08V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
13Y	-	02CZ13-Y	Z-diode	12.88..13.57V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
13Y	-	TZT13YW	Z-diode	12.88..13.57V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
13Y	-	Z02W13VY	Z-diode	12.88..13.57V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
13Z	-	02CZ13-Z	Z-diode	13.37..14.1V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
13Z	-	CZ1W13	Z-diode	13V±5%, Izt=19mA, 600mW	SOT-23	16dc	-	3a	Cdi
13Z	-	TZT13ZW	Z-diode	13.37..14.10V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
13Z	-	Z02W13VZ	Z-diode	13.37..14.10V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
14	-	1PS59SB14	Si-diode	Dual, Schottky, Sw, Fast, 30V, 200mA, Vf<0.8V(100mA), <5ns	SC-59	16dl	-	3a	Phi
14	-	AP8822C-54GA	Vdet-IC	5.4V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
14	-	AP8822C-54GT	Vdet-IC	5.4V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
14	-	AP8822C-54PA	Vdet-IC	5.4V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
14	-	AP8822C-54PT	Vdet-IC	5.4V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
14	-	CMBT9014	Si-npn	GP, 30V, 100mA, 250mW, B=150..1000, >125MHz	SOT-23	16ta	-	3a	Cdi
14	-	DTA114EB	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/10k	VMN3	19ta	-	3k	Rhm
14	-	DTA114ECA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/10k	SST3	16ta	-	3a	Rhm
14	-	DTA114EE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-416	16ta	-	3a	Rhm
14	-	DTA114EKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-346	16ta	-	3a	Rhm
14	-	DTA114EM	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10k/10k	VMT3	18ta	-	3a	Rhm
14	-	DTA114EUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/10k	UMT3	16ta	-	3a	Rhm
14	-	ELM9714NBB	Vdet-IC	1.4V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
14	-	MMBD1504	Si-diode	Dual, Sw, 180V, 200mA, Vf<1.5V(300mA), <4pF	SOT-23	16dg	-	3a	Nsc
14	-	MMBD1704	Si-diode	Dual, Fast, 30V, 150mA, 350mW, Vf<1.1V(50mA), 0.7ns	SOT-23	16dg	-	3a	Nsc
14	-	PDTA123YE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=2.2k/10k	SOT-416	16ta	-	3a	Nxp
-14	-	PDTA113EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=1k/1k	SOT-323	16ta	-	3a	NxH
140A	-	AAT60140A-S14	Vdet-IC	4.0V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
140A	-	AAT60140A-S2	Vdet-IC	4.0V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
140AC	-	BL8509-140ACRM	Vdet-IC	1.4V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
140AC	-	LC9009CB3TR140AC	Vdet-IC	1.4V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
140AN	-	BL8509-140ANRM	Vdet-IC	1.4V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
140AN	-	LC9009CB3TR140AN	Vdet-IC	1.4V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
140B	-	AAT60140B-S14	Vdet-IC	4.0V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
140B	-	AAT60140B-S2	Vdet-IC	4.0V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
140BC	-	BL8509-140BCRM	Vdet-IC	1.4V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
140BC	-	LC9009CB3TR140BC	Vdet-IC	1.4V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
140BN	-	BL8509-140BNRM	Vdet-IC	1.4V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
140BN	-	LC9009CB3TR140BN	Vdet-IC	1.4V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
140C	-	AAT60140C-S14	Vdet-IC	4.0V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
140C	-	AAT60140C-S2	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
140CC	-	BL8509-140CCRM	Vdet-IC	1.4V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
140CC	-	LC9009CB3TR140CC	Vdet-IC	1.4V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
140CN	-	BL8509-140CNRM	Vdet-IC	1.4V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
140CN	-	LC9009CB3TR140CN	Vdet-IC	1.4V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
140D	-	AAT60140D-S14	Vdet-IC	4.0V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
140D	-	AAT60140D-S2	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
140DC	-	BL8509-140DCRM	Vdet-IC	1.4V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
140DC	-	LC9009CB3TR140DC	Vdet-IC	1.4V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
140DN	-	BL8509-140DNRM	Vdet-IC	1.4V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
140DN	-	LC9009CB3TR140DN	Vdet-IC	1.4V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
140EC	-	BL8509-140ECRM	Vdet-IC	1.4V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
140EC	-	LC9009CB3TR140EC	Vdet-IC	1.4V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
140EN	-	BL8509-140ENRM	Vdet-IC	1.4V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
140EN	-	LC9009CB3TR140EN	Vdet-IC	1.4V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
140FC	-	BL8509-140FCRM	Vdet-IC	1.4V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
140FC	-	LC9009CB3TR140FC	Vdet-IC	1.4V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
140FN	-	BL8509-140FNRM	Vdet-IC	1.4V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
140FN	-	LC9009CB3TR140FN	Vdet-IC	1.4V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
140GC	-	BL8509-140GCRM	Vdet-IC	1.4V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
140GC	-	LC9009CB3TR140GC	Vdet-IC	1.4V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
140GN	-	BL8509-140GNRM	Vdet-IC	1.4V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
140GN	-	LC9009CB3TR140GN	Vdet-IC	1.4V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
141A	-	AAT60141A-S14	Vdet-IC	4.1V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
141A	-	AAT60141A-S2	Vdet-IC	4.1V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
141B	-	AAT60141B-S14	Vdet-IC	4.1V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
141B	-	AAT60141B-S2	Vdet-IC	4.1V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
141C	-	AAT60141C-S14	Vdet-IC	4.1V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
141C	-	AAT60141C-S2	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
141D	-	AAT60141D-S14	Vdet-IC	4.1V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
141D	-	AAT60141D-S2	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
142A	-	AAT60142A-S14	Vdet-IC	4.2V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
142A	-	AAT60142A-S2	Vdet-IC	4.2V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
142B	-	AAT60142B-S14	Vdet-IC	4.2V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
142B	-	AAT60142B-S2	Vdet-IC	4.2V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
142C	-	AAT60142C-S14	Vdet-IC	4.2V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
142C	-	AAT60142C-S2	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
142D	-	AAT60142D-S14	Vdet-IC	4.2V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
142D	-	AAT60142D-S2	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
143A	-	AAT60143A-S14	Vdet-IC	4.3V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
143A	-	AAT60143A-S2	Vdet-IC	4.3V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
143B	-	AAT60143B-S14	Vdet-IC	4.3V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
143B	-	AAT60143B-S2	Vdet-IC	4.3V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
143C	-	AAT60143C-S14	Vdet-IC	4.3V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
143C	-	AAT60143C-S2	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
143D	-	AAT60143D-S14	Vdet-IC	4.3V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
143D	-	AAT60143D-S2	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
144A	-	AAT60144A-S14	Vdet-IC	4.4V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
144A	-	AAT60144A-S2	Vdet-IC	4.4V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
144B	-	AAT60144B-S14	Vdet-IC	4.4V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
144B	-	AAT60144B-S2	Vdet-IC	4.4V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
144C	-	AAT60144C-S14	Vdet-IC	4.4V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
144C	-	AAT60144C-S2	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
144D	-	AAT60144D-S14	Vdet-IC	4.4V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
144D	-	AAT60144D-S2	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
145A	-	AAT60145A-S14	Vdet-IC	4.5V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
145A	-	AAT60145A-S2	Vdet-IC	4.5V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
145B	-	AAT60145B-S14	Vdet-IC	4.5V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
145B	-	AAT60145B-S2	Vdet-IC	4.5V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
145C	-	AAT60145C-S14	Vdet-IC	4.5V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
145C	-	AAT60145C-S2	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
145D	-	AAT60145D-S14	Vdet-IC	4.5V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
145D	-	AAT60145D-S2	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
146A	-	AAT60146A-S14	Vdet-IC	4.6V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
146A	-	AAT60146A-S2	Vdet-IC	4.6V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
146B	-	AAT60146B-S14	Vdet-IC	4.6V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
146B	-	AAT60146B-S2	Vdet-IC	4.6V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
146C	-	AAT60146C-S14	Vdet-IC	4.6V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
146C	-	AAT60146C-S2	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
146D	-	AAT60146D-S14	Vdet-IC	4.6V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
146D	-	AAT60146D-S2	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
147A	-	AAT60147A-S14	Vdet-IC	4.7V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
147A	-	AAT60147A-S2	Vdet-IC	4.7V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
147B	-	AAT60147B-S14	Vdet-IC	4.7V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
147B	-	AAT60147B-S2	Vdet-IC	4.7V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
147C	-	AAT60147C-S14	Vdet-IC	4.7V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
147C	-	AAT60147C-S2	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
147D	-	AAT60147D-S14	Vdet-IC	4.7V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
147D	-	AAT60147D-S2	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
148A	-	AAT60148A-S14	Vdet-IC	4.8V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
148A	-	AAT60148A-S2	Vdet-IC	4.8V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
148B	-	AAT60148B-S14	Vdet-IC	4.8V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
148B	-	AAT60148B-S2	Vdet-IC	4.8V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
148C	-	AAT60148C-S14	Vdet-IC	4.8V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
148C	-	AAT60148C-S2	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
148D	-	AAT60148D-S14	Vdet-IC	4.8V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
148D	-	AAT60148D-S2	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
149A	-	AAT60149A-S14	Vdet-IC	4.9V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
149A	-	AAT60149A-S2	Vdet-IC	4.9V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
149B	-	AAT60149B-S14	Vdet-IC	4.9V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
149B	-	AAT60149B-S2	Vdet-IC	4.9V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
149C	-	AAT60149C-S14	Vdet-IC	4.9V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
149C	-	AAT60149C-S2	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
149D	-	AAT60149D-S14	Vdet-IC	4.9V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
149D	-	AAT60149D-S2	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
14B	-	CMBT9014B	Si-npn	GP, 30V, 100mA, 250mW, B=100..300, >125MHz	SOT-23	16ta	-	3a	Cdi
14C	-	CMBT9014C	Si-npn	GP, 30V, 100mA, 250mW, B=200.600, >125MHz	SOT-23	16ta	-	3a	Cdi
14D	-	CMBT9014D	Si-npn	GP, 30V, 100mA, 250mW, B=400..1000, >125MHz	SOT-23	16ta	-	3a	Cdi
14M	-	MAZ3140-M	Z-diode	13.65..14.35V, If=100mA, Zzt=30Ω, 200mW	SC-59	16dc	-	3a	Pan
14s	-	BAS125-04	Si-diode	Dual, Schottky, 25V, 100mA, Vf<0.9V(35mA), Cd<1.1pF	SOT-23	16dl	-	3c	Inf
14s	-	BAS125-04W	Si-diode	Dual, Schottky, 25V, 100mA, Vf<0.9V(35mA), Cd<1.1pF	SOT-323	16dl	-	3c	Inf
14V	-	CHPZ14VPT	Z-diode	Dual, 13.3..14.7V, Izt=5mA, Zzt=30Ω, 350mW	SOT-23	16df	-	3a	Chm
14W	-	CMSZDA39V	Z-diode	Dual, 37.0..41.0V, Zzt=130Ω, 4.3mA, 275mW	SOT-323	16df	-	3a	Cen
15	-	1PS59SB15	Si-diode	Dual, Schottky, Sw, Fast, 30V, 200mA, Vf<0.8V(100mA), <5ns	SC-59	16dg	-	3a	Phi
15	-	AP8822C-55GA	Vdet-IC	5.5V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
15	-	AP8822C-55GT	Vdet-IC	5.5V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
15	-	AP8822C-55PA	Vdet-IC	5.5V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
15	-	AP8822C-55PT	Vdet-IC	5.5V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
15	-	CMBT9015	Si-pnp	GP, 30V, 100mA, 250mW, B=150..1000, >125MHz	SOT-23	16ta	-	3a	Cdi
15	-	DTA124ECA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SOT-23	16ta	-	3a	Rhm
15	-	DTA124EE	Si-pnp-Digi	Sw, 50V, 100mA, 1500mW, 250MHz, R1/R2=22k/22k	SOT-416	16ta	-	3a	Rhm
15	-	DTA124EKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SOT-346	16ta	-	3a	Rhm
15	-	DTA124EM	Si-pnp-Digi	Sw, 50V, 100mA, 1500mW, 250MHz, R1/R2=22k/22k	VMT3	18ta	-	3a	Rhm
15	-	DTA124EUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	UMT3	16ta	-	3a	Rhm
15	-	ELM9715NBB	Vdet-IC	1.5V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
15	-	MMBD1505	Si-diode	Dual, Sw, 180V, 200mA, Vf<1.5V(300mA), <4pF	SOT-23	16df	-	3a	Nsc
15	-	MSCT15	TVS	Vrwm=15V, 300W (8/20µs)	SOT-23	16dh	-	3a	Msp
15	-	PDTA113ZE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=1k/10k	SOT-416	16ta	-	3a	Nxp
15	-	TZT15W	Z-diode	13.80..15.60V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
15	-	Z02W15V	Z-diode	13.80..15.60V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
-15	-	PDTA113ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxH
150	-	HZM15NB	Z-diode	13.84..15.52V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
150	-	KTY82/150	Tdet-IC	Sensor, Rs=950..1050Ω(25°C, 1mA)	SOT-23	16ag	-	3a	Nxp
150A	-	AAT60150A-S14	Vdet-IC	5.0V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
150A	-	AAT60150A-S2	Vdet-IC	5.0V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
150AC	-	BL8509-150ACRM	Vdet-IC	1.5V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
150AC	-	LC9009CB3TR150AC	Vdet-IC	1.5V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
150AN	-	BL8509-150ANRM	Vdet-IC	1.5V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
150AN	-	LC9009CB3TR150AN	Vdet-IC	1.5V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
150B	-	AAT60150B-S14	Vdet-IC	5.0V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
150B	-	AAT60150B-S2	Vdet-IC	5.0V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
150BC	-	BL8509-150BCRM	Vdet-IC	1.5V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
150BC	-	LC9009CB3TR150BC	Vdet-IC	1.5V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
150BN	-	BL8509-150BNRM	Vdet-IC	1.5V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
150BN	-	LC9009CB3TR150BN	Vdet-IC	1.5V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
150C	-	AAT60150C-S14	Vdet-IC	5.0V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
150C	-	AAT60150C-S2	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
150CC	-	BL8509-150CCRM	Vdet-IC	1.5V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
150CC	-	LC9009CB3TR150CC	Vdet-IC	1.5V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
150CN	-	BL8509-150CNRM	Vdet-IC	1.5V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
150CN	-	LC9009CB3TR150CN	Vdet-IC	1.5V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
150D	-	AAT60150D-S14	Vdet-IC	5.0V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
150D	-	AAT60150D-S2	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
150DC	-	BL8509-150DCRM	Vdet-IC	1.5V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
150DC	-	LC9009CB3TR150DC	Vdet-IC	1.5V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
150DN	-	BL8509-150DNRM	Vdet-IC	1.5V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
150DN	-	LC9009CB3TR150DN	Vdet-IC	1.5V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
150EC	-	BL8509-150ECRM	Vdet-IC	1.5V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
150EC	-	LC9009CB3TR150EC	Vdet-IC	1.5V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
150EN	-	BL8509-150ENRM	Vdet-IC	1.5V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
150EN	-	LC9009CB3TR150EN	Vdet-IC	1.5V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
150FC	-	BL8509-150FCRM	Vdet-IC	1.5V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
150FC	-	LC9009CB3TR150FC	Vdet-IC	1.5V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
150FN	-	BL8509-150FNRM	Vdet-IC	1.5V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
150FN	-	LC9009CB3TR150FN	Vdet-IC	1.5V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
150GC	-	BL8509-150GCRM	Vdet-IC	1.5V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
150GC	-	LC9009CB3TR150GC	Vdet-IC	1.5V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
150GN	-	BL8509-150GNRM	Vdet-IC	1.5V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
150GN	-	LC9009CB3TR150GN	Vdet-IC	1.5V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
151	-	KTY82/151	Tdet-IC	Sensor, Rs=950..1000Ω(25°C, 1mA)	SOT-23	16ag	-	3a	Nxp
151	-	PZM15NB1	Z-diode	15V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
151	ca	HZM15NB1	Z-diode	13.84..14.46V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
151A	-	AAT60151A-S14	Vdet-IC	5.1V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
151A	-	AAT60151A-S2	Vdet-IC	5.1V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
151B	-	AAT60151B-S14	Vdet-IC	5.1V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
151B	-	AAT60151B-S2	Vdet-IC	5.1V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
151C	-	AAT60151C-S14	Vdet-IC	5.1V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
151C	-	AAT60151C-S2	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
151D	-	AAT60151D-S14	Vdet-IC	5.1V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
151D	-	AAT60151D-S2	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
152	-	PZM15NB2	Z-diode	15V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
152	ca	HZM15NB2	Z-diode	14.34..14.98V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
152A	-	AAT60152A-S14	Vdet-IC	5.2V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
152A	-	AAT60152A-S2	Vdet-IC	5.2V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
152B	-	AAT60152B-S14	Vdet-IC	5.2V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
152B	-	AAT60152B-S2	Vdet-IC	5.2V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
152C	-	AAT60152C-S14	Vdet-IC	5.2V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
152C	-	AAT60152C-S2	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
152D	-	AAT60152D-S14	Vdet-IC	5.2V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
152D	-	AAT60152D-S2	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
153	-	PZM15NB3	Z-diode	15V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
153	ca	HZM15NB3	Z-diode	14.85..15.52V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
153A	-	AAT60153A-S14	Vdet-IC	5.3V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
153A	-	AAT60153A-S2	Vdet-IC	5.3V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
153B	-	AAT60153B-S14	Vdet-IC	5.3V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
153B	-	AAT60153B-S2	Vdet-IC	5.3V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
153C	-	AAT60153C-S14	Vdet-IC	5.3V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
153C	-	AAT60153C-S2	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
153D	-	AAT60153D-S14	Vdet-IC	5.3V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
153D	-	AAT60153D-S2	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
153S	-	SS15P3S	Si-diode	SBR, 30V, 15A, Vf<0.57V(10A)	TO-277A	76dg	-	3o	Vs
154A	-	AAT60154A-S14	Vdet-IC	5.4V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
154A	-	AAT60154A-S2	Vdet-IC	5.4V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
154B	-	AAT60154B-S14	Vdet-IC	5.4V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
154B	-	AAT60154B-S2	Vdet-IC	5.4V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
154C	-	AAT60154C-S14	Vdet-IC	5.4V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
154C	-	AAT60154C-S2	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
154D	-	AAT60154D-S14	Vdet-IC	5.4V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
154D	-	AAT60154D-S2	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
155A	-	AAT60155A-S14	Vdet-IC	5.5V±2%, +Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
155A	-	AAT60155A-S2	Vdet-IC	5.5V±2%, +Reset ODO	SOT-23	16vdc	VD7	3d	Aat
155B	-	AAT60155B-S14	Vdet-IC	5.5V±2%, +Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
155B	-	AAT60155B-S2	Vdet-IC	5.5V±2%, +Reset PPO	SOT-23	16vdc	VD7	3d	Aat
155C	-	AAT60155C-S14	Vdet-IC	5.5V±2%, -Reset ODO	TSOT-23	16vdc	VD7	3d	Aat
155C	-	AAT60155C-S2	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23	16vdc	VD7	3d	Aat
155D	-	AAT60155D-S14	Vdet-IC	5.5V±2%, -Reset PPO	TSOT-23	16vdc	VD7	3d	Aat
155D	-	AAT60155D-S2	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23	16vdc	VD7	3d	Aat
156	-	DTA144VUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/10k	UMT3	16ta	-	3a	Rhm
15A	-	MMBZ15VA	TVS	Dual, Vrwm=12V, Vbr=14.25..15.75V, 1.9A, 40W(1ms)	SOT-23	16dg	-	3a	Wtr
15A	-	PZM15NB2A	Z-diode	Dual, 15V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
15B	-	CMBT9015B	Si-pnp	GP, 30V, 100mA, 250mW, B=100..300, >125MHz	SOT-23	16ta	-	3a	Cdi
15C	-	CMBT9015C	Si-pnp	GP, 30V, 100mA, 250mW, B=200.600, >125MHz	SOT-23	16ta	-	3a	Cdi
15C	-	MSCT15C	TVS	Dual, Vrwm=15V, 300W (8/20µs), Bidir.	SOT-23	16dp	-	3a	Msp
15C	-	TVS2315PT	TVS	Dual, Vbr=16.7V, Vrwm=15V, 1A, 300W(1ms)	SOT-23	16df	-	3a	Chm
15D	-	CMBT9015D	Si-pnp	GP, 30V, 100mA, 250mW, B=400..1000, >125MHz	SOT-23	16ta	-	3a	Cdi
15G	-	ZD15G-AE3	Z-diode	15V±5%, Zzt=42Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
15H	-	BZX84C15-V	Z-diode	14.33..15.11V, Izt=5mA, Zzt=15Ω, 300mW	SOT-23	16dc	-	3f	Kec
15H	-	MAZ3150-H	Z-diode	13.9..15.6V, If=100mA, Zzt=30Ω, 200mW	SC-59	16dc	-	3a	Pan
15L	-	MAZ3150-L	Z-diode	13.9..15.6V, If=100mA, Zzt=30Ω, 200mW	SC-59	16dc	-	3a	Pan
15L	-	ZD15L-AE3	Z-diode	15V±5%, Zzt=42Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
15M	-	MAZ3150-M	Z-diode	13.9..15.6V, If=100mA, Zzt=30Ω, 200mW	SC-59	16dc	-	3a	Pan
15s	-	BAS125-05	Si-diode	Dual, Schottky, 25V, 100mA, Vf<0.9V(35mA), Cd<1.1pF	SOT-23	16dg	-	3c	Inf
15s	-	BAS125-05W	Si-diode	Dual, Schottky, 25V, 100mA, Vf<0.9V(35mA), Cd<1.1pF	SOT-323	16dg	-	3c	Inf
15T	-	TK71515AS	LVR-IC	LDO, 1.5V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
15V	-	CHPZ15VPT	Z-diode	Dual, 14.2..15.8V, Izt=5mA, Zzt=30Ω, 350mW	SOT-23	16df	-	3a	Chm
15V	-	PZM15NB	Z-diode	15V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
15W	-	CMSZDA43V	Z-diode	Dual, 40.0..46.0V, Zzt=150Ω, 3.9mA, 275mW	SOT-323	16df	-	3a	Cen



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
15X	-	02CZ15-X	Z-diode	13.8..14.63V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
15X	-	TZT15XW	Z-diode	13.80..14.63V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
15X	-	Z02W15VX	Z-diode	13.80..14.63V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
15Y	-	02CZ15-Y	Z-diode	14.33..15.11V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
15Y	-	TZT15YW	Z-diode	14.33..15.11V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
15Y	-	Z02W15VY	Z-diode	14.33..15.11V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
15Z	-	02CZ15-Z	Z-diode	14.81..15.6V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
15Z	-	CZ1W15	Z-diode	15V±5%, Izt=17mA, 600mW	SOT-23	16dc	-	3a	Cdi
15Z	-	TZT15ZW	Z-diode	14.81..15.60V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3a	Ttr
15Z	-	Z02W15VZ	Z-diode	14.81..15.60V, Izt=5mA, Zzt=15Ω, 200mW	SOT-23	16dc	-	3f	Kec
16	-	1PS59SB16	Si-diode	Dual, Schottky, Sw, Fast, 30V, 200mA, Vf<0.8V(100mA), <5ns	SC-59	16df	-	3a	Phi
16	-	AP8822C-56GA	Vdet-IC	5.6V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
16	-	AP8822C-56GT	Vdet-IC	5.6V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
16	-	AP8822C-56PA	Vdet-IC	5.6V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
16	-	AP8822C-56PT	Vdet-IC	5.6V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
16	-	DTA144EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=47k/47k	SOT-416	16ta	-	3a	Rhm
16	-	DTA144EKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	SOT-346	16ta	-	3a	Rhm
16	-	DTA144EM	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=47k/47k	VMT3	18ta	-	3a	Rhm
16	-	DTA144EUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	UMT3	16ta	-	3a	Rhm
16	-	ELM9716NBB	Vdet-IC	1.6V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
16	-	ELM9816BB	LVR-IC	1.6V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
16	-	PDTA113EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=1k/1k	SOT-416	16ta	-	3a	Nxp
16	-	TZT16W	Z-diode	15.30..17.10V, Izt=5mA, Zzt=18Ω, 200mW	SOT-23	16dc	-	3a	Ttr
16	-	Z02W16V	Z-diode	15.30..17.10V, Izt=5mA, Zzt=18Ω, 200mW	SOT-23	16dc	-	3f	Kec
-16	-	PDTA113ZU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=1k/10k	SOT-323	16ta	-	3a	NxH
160	-	HZM16NB	Z-diode	15.37..17.09V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
160AC	-	BL8509-160ACRM	Vdet-IC	1.6V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
160AC	-	LC9009CB3TR160AC	Vdet-IC	1.6V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
160AN	-	BL8509-160ANRM	Vdet-IC	1.6V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
160AN	-	LC9009CB3TR160AN	Vdet-IC	1.6V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
160BC	-	BL8509-160BCRM	Vdet-IC	1.6V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
160BC	-	LC9009CB3TR160BC	Vdet-IC	1.6V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
160BN	-	BL8509-160BNRM	Vdet-IC	1.6V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
160BN	-	LC9009CB3TR160BN	Vdet-IC	1.6V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
160CC	-	BL8509-160CCRM	Vdet-IC	1.6V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
160CC	-	LC9009CB3TR160CC	Vdet-IC	1.6V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
160CN	-	BL8509-160CNRM	Vdet-IC	1.6V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
160CN	-	LC9009CB3TR160CN	Vdet-IC	1.6V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
160DC	-	BL8509-160DCRM	Vdet-IC	1.6V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
160DC	-	LC9009CB3TR160DC	Vdet-IC	1.6V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
160DN	-	BL8509-160DNRM	Vdet-IC	1.6V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
160DN	-	LC9009CB3TR160DN	Vdet-IC	1.6V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
160EC	-	BL8509-160ECRM	Vdet-IC	1.6V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
160EC	-	LC9009CB3TR160EC	Vdet-IC	1.6V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
160EN	-	BL8509-160ENRM	Vdet-IC	1.6V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
160EN	-	LC9009CB3TR160EN	Vdet-IC	1.6V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
160FC	-	BL8509-160FCRM	Vdet-IC	1.6V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
160FC	-	LC9009CB3TR160FC	Vdet-IC	1.6V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
160FN	-	BL8509-160FNRM	Vdet-IC	1.6V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
160FN	-	LC9009CB3TR160FN	Vdet-IC	1.6V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
160GC	-	BL8509-160GCRM	Vdet-IC	1.6V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
160GC	-	LC9009CB3TR160GC	Vdet-IC	1.6V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
160GN	-	BL8509-160GNRM	Vdet-IC	1.6V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
160GN	-	LC9009CB3TR160GN	Vdet-IC	1.6V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
161	-	PZM16NB1	Z-diode	16V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
161	ca	HZM16NB1	Z-diode	15.37..16.01V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
162	-	PZM16NB2	Z-diode	16V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
162	ca	HZM16NB2	Z-diode	15.85..16.51V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
163	-	PZM16NB3	Z-diode	16V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
163	ca	HZM16NB3	Z-diode	16.35..17.09V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
166	-	DTC144VUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/10k	UMT3	16ta	-	3a	Rhm
16G	-	ZD16G-AE3	Z-diode	16V±5%, Zzt=50Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
16H	-	BZX84C16-V	Z-diode	15.80..16.60V, Izt=5mA, Zzt=18Ω, 300mW	SOT-23	16dc	-	3f	Kec
16H	-	MAZ3160-H	Z-diode	15.3..17.1V, If=100mA, Zzt=40Ω, 200mW	SC-59	16dc	-	3a	Pan
16L	-	MAZ3160-L	Z-diode	15.3..17.1V, If=100mA, Zzt=40Ω, 200mW	SC-59	16dc	-	3a	Pan
16L	-	ZD16L-AE3	Z-diode	16V±5%, Zzt=50Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
16M	-	MAZ3160-M	Z-diode	15.3..17.1V, If=100mA, Zzt=40Ω, 200mW	SC-59	16dc	-	3a	Pan
16N	-	STM1061N16W	Vdet-IC	1.6V±2%, -Reset ODO	SOT-323	16vda	VD6	3d	Ste
16N	-	STM1061N16WX	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Ste
16s	-	BAS125-06	Si-diode	Dual, Schottky, 25V, 100mA, Vf<0.9V(35mA), Cd<1.1pF	SOT-23	16df	-	3c	Inf

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
16s	-	BAS125-06W	Si-diode	Dual, Schottky, 25V, 100mA, Vf<0.9V(35mA), Cd<1.1pF	SOT-323	16df	-	3c	Inf
16T	-	TK71516AS	LVR-IC	LDO, 1.6V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
16V	-	CHPZ16VPT	Z-diode	Dual, 15.2..16.8V, Izt=5mA, Zzt=40Ω, 350mW	SOT-23	16df	-	3a	Chm
16V	-	PZM16NB	Z-diode	16V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
16W	-	CMSZDA47V	Z-diode	Dual, 44.0.50.0V, Zzt=170Ω, 3.5mA, 275mW	SOT-323	16df	-	3a	Cen
16X	-	02CZ16-X	Z-diode	15.3..16.1V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
16X	-	TZT16XW	Z-diode	15.30..16.10V, Izt=5mA, Zzt=18Ω, 200mW	SOT-23	16dc	-	3a	Ttr
16X	-	Z02W16VX	Z-diode	15.30..16.10V, Izt=5mA, Zzt=18Ω, 200mW	SOT-23	16dc	-	3f	Kec
16Y	-	02CZ16-Y	Z-diode	15.8..16.6V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
16Y	-	TZT16YW	Z-diode	15.80..16.60V, Izt=5mA, Zzt=18Ω, 200mW	SOT-23	16dc	-	3a	Ttr
16Y	-	Z02W16VY	Z-diode	15.80..16.60V, Izt=5mA, Zzt=18Ω, 200mW	SOT-23	16dc	-	3f	Kec
16Z	-	02CZ16-Z	Z-diode	16.3..17.1V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
16Z	-	CZ1W16	Z-diode	16V±5%, Izt=15.5mA, 600mW	SOT-23	16dc	-	3a	Cdi
16Z	-	TZT16ZW	Z-diode	16.30..17.10V, Izt=5mA, Zzt=18Ω, 200mW	SOT-23	16dc	-	3a	Ttr
16Z	-	Z02W16VZ	Z-diode	16.30..17.10V, Izt=5mA, Zzt=18Ω, 200mW	SOT-23	16dc	-	3f	Kec
17	-	AP8822C-57GA	Vdet-IC	5.7V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
17	-	AP8822C-57GT	Vdet-IC	5.7V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
17	-	AP8822C-57PA	Vdet-IC	5.7V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
17	-	AP8822C-57PT	Vdet-IC	5.7V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
17	-	ELM9717NBB	Vdet-IC	1.7V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
17	-	ELM9817BB	LVR-IC	1.7V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
17	-	PDTA113EK	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=1k/1k	SOT-346	16ta	-	3a	Nxp
17	-	PDTC115TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1=100k	SOT-416	16ta	-	3a	Nxp
-17	-	PDTC115TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=100k	SOT-323	16ta	-	3a	NxH
170AC	-	BL8509-170ACRM	Vdet-IC	1.7V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
170AC	-	LC9009CB3TR170AC	Vdet-IC	1.7V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
170AN	-	BL8509-170ANRM	Vdet-IC	1.7V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
170AN	-	LC9009CB3TR170AN	Vdet-IC	1.7V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
170BC	-	BL8509-170BCRM	Vdet-IC	1.7V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
170BC	-	LC9009CB3TR170BC	Vdet-IC	1.7V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
170BN	-	BL8509-170BNRM	Vdet-IC	1.7V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
170BN	-	LC9009CB3TR170BN	Vdet-IC	1.7V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
170CC	-	BL8509-170CCRM	Vdet-IC	1.7V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
170CC	-	LC9009CB3TR170CC	Vdet-IC	1.7V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
170CN	-	BL8509-170CNRM	Vdet-IC	1.7V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
170CN	-	LC9009CB3TR170CN	Vdet-IC	1.7V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
170DC	-	BL8509-170DCRM	Vdet-IC	1.7V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
170DC	-	LC9009CB3TR170DC	Vdet-IC	1.7V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
170DN	-	BL8509-170DNRM	Vdet-IC	1.7V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
170DN	-	LC9009CB3TR170DN	Vdet-IC	1.7V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
170EC	-	BL8509-170ECRM	Vdet-IC	1.7V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
170EC	-	LC9009CB3TR170EC	Vdet-IC	1.7V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
170EN	-	BL8509-170ENRM	Vdet-IC	1.7V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
170EN	-	LC9009CB3TR170EN	Vdet-IC	1.7V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
170FC	-	BL8509-170FCRM	Vdet-IC	1.7V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
170FC	-	LC9009CB3TR170FC	Vdet-IC	1.7V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
170FN	-	BL8509-170FNRM	Vdet-IC	1.7V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
170FN	-	LC9009CB3TR170FN	Vdet-IC	1.7V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
170GC	-	BL8509-170GCRM	Vdet-IC	1.7V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
170GC	-	LC9009CB3TR170GC	Vdet-IC	1.7V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
170GN	-	BL8509-170GNRM	Vdet-IC	1.7V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
170GN	-	LC9009CB3TR170GN	Vdet-IC	1.7V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
179	-	FMMT5179	Si-npn	GP, 20V, 50mA, 330mW, B=25..250, >1100MHz	SOT-23	16ta	-	3a	Zx
17C	-	BZX84B17	Z-diode	16.66..17.34V, Zzt=40Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
17C	-	TZTC17WS	Z-diode	16.15..17.85V, Izt=5mA, Zzt=40Ω, 200mW	SOT-323	16dc	-	3a	Ttr
17N	-	STM1061N17W	Vdet-IC	1.7V±2%, -Reset ODO	SOT-323	16vda	VD6	3d	Ste
17N	-	STM1061N17WX	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Ste
17T	-	TK71517AS	LVR-IC	LDO, 1.7V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
17V	-	CHPZ17VPT	Z-diode	Dual, 16.1..17.9V, Izt=5mA, Zzt=40Ω, 350mW	SOT-23	16df	-	3a	Chm
18	-	AP8822C-58GA	Vdet-IC	5.8V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
18	-	AP8822C-58GT	Vdet-IC	5.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
18	-	AP8822C-58PA	Vdet-IC	5.8V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
18	-	AP8822C-58PT	Vdet-IC	5.8V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
18	-	ELM9718NBB	Vdet-IC	1.8V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
18	-	ELM9818BB	LVR-IC	1.8V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
18	-	PDTC143ZK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k	SC-59	16ta	-	3a	Nxp
18	-	PDTC144VE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=47k/10k	SOT-416	16ta	-	3a	Nxp
18	-	TZT18W	Z-diode	16.80..19.10V, Izt=5mA, Zzt=20Ω, 200mW	SOT-23	16dc	-	3a	Ttr
18	-	Z02W18V	Z-diode	16.80..19.10V, Izt=5mA, Zzt=20Ω, 200mW	SOT-23	16dc	-	3f	Kec
-18	-	PDTC144VU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	SOT-490	18ta	-	3a	NxH





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
180	-	HZM18NB	Z-diode	16.94..19.03V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
180AC	-	BL8509-180ACRM	Vdet-IC	1.8V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
180AC	-	LC9009CB3TR180AC	Vdet-IC	1.8V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
180AN	-	BL8509-180ANRM	Vdet-IC	1.8V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
180AN	-	LC9009CB3TR180AN	Vdet-IC	1.8V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
180BC	-	BL8509-180BCRM	Vdet-IC	1.8V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
180BC	-	LC9009CB3TR180BC	Vdet-IC	1.8V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
180BN	-	BL8509-180BNRM	Vdet-IC	1.8V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
180BN	-	LC9009CB3TR180BN	Vdet-IC	1.8V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
180CC	-	BL8509-180CCRM	Vdet-IC	1.8V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
180CC	-	LC9009CB3TR180CC	Vdet-IC	1.8V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
180CN	-	BL8509-180CNRM	Vdet-IC	1.8V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
180CN	-	LC9009CB3TR180CN	Vdet-IC	1.8V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
180DC	-	BL8509-180DCRM	Vdet-IC	1.8V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
180DC	-	LC9009CB3TR180DC	Vdet-IC	1.8V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
180DN	-	BL8509-180DNRM	Vdet-IC	1.8V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
180DN	-	LC9009CB3TR180DN	Vdet-IC	1.8V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
180EC	-	BL8509-180ECRM	Vdet-IC	1.8V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
180EC	-	LC9009CB3TR180EC	Vdet-IC	1.8V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
180EN	-	BL8509-180ENRM	Vdet-IC	1.8V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
180EN	-	LC9009CB3TR180EN	Vdet-IC	1.8V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
180FC	-	BL8509-180FCRM	Vdet-IC	1.8V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
180FC	-	LC9009CB3TR180FC	Vdet-IC	1.8V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
180FN	-	BL8509-180FNRM	Vdet-IC	1.8V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
180FN	-	LC9009CB3TR180FN	Vdet-IC	1.8V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
180GC	-	BL8509-180GCRM	Vdet-IC	1.8V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
180GC	-	LC9009CB3TR180GC	Vdet-IC	1.8V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
180GN	-	BL8509-180GNRM	Vdet-IC	1.8V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
180GN	-	LC9009CB3TR180GN	Vdet-IC	1.8V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
181	-	PZM18NB1	Z-diode	18V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
181	ca	HZM18NB1	Z-diode	16.94..17.7V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
182	-	PZM18NB2	Z-diode	18V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
182	ca	HZM18NB2	Z-diode	17.56..18.35V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
18-2	-	UTC8118-2	Vdet-IC	1.8V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
183	-	PZM18NB3	Z-diode	18V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
183	ca	HZM18NB3	Z-diode	18.21..19.03V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
18-3	-	UTC8118-3	Vdet-IC	1.8V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
18-5	-	UTC8118-5	Vdet-IC	1.8V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
18A	-	AAT60018A-S2	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
18A	-	CMPZ5221B	Z-diode	2.4V±2.5%, Izt=20mA, Zzt=30Ω, 350mW	SOT-23	16dc	-	3a	Cen
18A	-	FDZS2.4LT	Z-diode	2.28..2.52V, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3a	Fis
18A	-	HMBZ5221B	Z-diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3a	Hsn
18A	-	LMBZ5221BL	Z-diode	2.28..2.52V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
18A	-	MMBZ18VA	TVS	Dual, Vrwm=14.5V, Vbr=17.10..18.90V, 1.6A, 40W(1ms)	SOT-23	16dg	-	3a	Wtr
18A	-	MMBZ5221B	Z-diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3c	Ons
18A	-	ZD5221BN3	Z-diode	2.4V±5%, 20mA, Zzt=30Ω, 300mW	SOT-23	16dc	-	3a	Cys
18A-	-	MMCZ5221BPT	Z-diode	2.280..2.520V, Izt=5mA, Zzt=100Ω, 225mW	SOT-346	16dc	-	3a	Chm
18B	-	AAT60018B-S2	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
18B	-	CMPZ5222B	Z-diode	2.5V±2.5%, Izt=20mA, Zzt=30Ω, 350mW	SOT-23	16dc	-	3a	Cen
18B	-	FDZS2.5LT	Z-diode	2.37..2.63V, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3a	Fis
18B	-	HMBZ5222B	Z-diode	2.5V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3a	Hsn
18B	-	LMBZ5222BL	Z-diode	2.37..2.63V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
18B	-	MMBZ5222B	Z-diode	2.5V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3c	Ons
18B	-	ZD5222BN3	Z-diode	2.5V±5%, 20mA, Zzt=30Ω, 300mW	SOT-23	16dc	-	3a	Cys
18B-	-	MMCZ5222BPT	Z-diode	2.375..2.625V, Izt=5mA, Zzt=100Ω, 225mW	SOT-346	16dc	-	3a	Chm
18C	-	AAT60018C-S2	Vdet-IC	1.8V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
18C	-	CMPZ5223B	Z-diode	2.7V±2.5%, Izt=20mA, Zzt=30Ω, 350mW	SOT-23	16dc	-	3a	Cen
18C	-	FDZS2.7LT	Z-diode	2.56..2.84V, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3a	Fis
18C	-	HMBZ5223B	Z-diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3a	Hsn
18C	-	LMBZ5223BL	Z-diode	2.56..2.84V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
18C	-	MMBZ5223B	Z-diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3c	Ons
18C	-	ZD5223BN3	Z-diode	2.7V±5%, 20mA, Zzt=30Ω, 300mW	SOT-23	16dc	-	3a	Cys
18C-	-	MMCZ5223BPT	Z-diode	2.565..2.835V, Izt=5mA, Zzt=100Ω, 225mW	SOT-346	16dc	-	3a	Chm
18D	-	AAT60018D-S2	Vdet-IC	1.8V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
18D	-	CMPZ5224B	Z-diode	2.8V±2.5%, Izt=20mA, Zzt=30Ω, 350mW	SOT-23	16dc	-	3a	Cen
18D	-	FDZS2.8LT	Z-diode	2.66..2.94V, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3a	Fis
18D	-	HMBZ5224B	Z-diode	2.8V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3a	Hsn
18D	-	LMBZ5224BL	Z-diode	2.66..2.94V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
18D	-	MMBZ5224B	Z-diode	2.8V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3c	Ons
18D-	-	MMCZ5224BPT	Z-diode	2.660..2.940V, Izt=5mA, Zzt=100Ω, 225mW	SOT-346	16dc	-	3a	Chm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
18E	-	CMPZ5225B	Z-diode	3.0V±2.5%, Izt=20mA, Zzt=29Ω, 350mW	SOT-23	16dc	-	3a	Cen
18E	-	FDZS3.0LT	Z-diode	2.85..3.15V, Izt=20mA, Zzt=29Ω, 225mW	SOT-23	16dc	-	3a	Fis
18E	-	HMBZ5225B	Z-diode	3V±5%, Izt=20mA, Zzt=29Ω, 225mW	SOT-23	16dc	-	3a	Hsn
18E	-	LMBZ5225BL	Z-diode	2.85..3.15V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
18E	-	MMBZ5225B	Z-diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 225mW	SOT-23	16dc	-	3c	Ons
18E	-	ZD5225BN3	Z-diode	3.0V±5%, 20mA, Zzt=29Ω, 300mW	SOT-23	16dc	-	3a	Cys
18E-	-	MMCZ5225BPT	Z-diode	2.850..3.150V, Izt=5mA, Zzt=95Ω, 225mW	SOT-346	16dc	-	3a	Chm
18F	-	CMBZ5260B	Z-diode	43V±5%, Izt=3.0mA, Zzt=93Ω, 300mW	SOT-23	16dc	-	3a	Mei
18G	-	ZD18G-AE3	Z-diode	18V±5%, Zzt=65Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
18H	-	BZX84C18-V	Z-diode	17.46..18.43V, Izt=5mA, Zzt=20Ω, 300mW	SOT-23	16dc	-	3f	Kec
18H	-	MAZ3180-H	Z-diode	16.9..19.1V, If=100mA, Zzt=45Ω, 200mW	SC-59	16dc	-	3a	Pan
18L	-	MAZ3180-L	Z-diode	16.9..19.1V, If=100mA, Zzt=45Ω, 200mW	SC-59	16dc	-	3a	Pan
18L	-	ZD18L-AE3	Z-diode	18V±5%, Zzt=65Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
18M	-	MAZ3180-M	Z-diode	16.9..19.1V, If=100mA, Zzt=45Ω, 200mW	SC-59	16dc	-	3a	Pan
18T	-	TK71518AS	LVR-IC	LDO, 1.8V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
18V	-	CHPZ18VPT	Z-diode	Dual, 17.1..18.9V, Izt=5mA, Zzt=45Ω, 350mW	SOT-23	16df	-	3a	Chm
18V	-	PZM18NB	Z-diode	18V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
18X	-	02CZ18-X	Z-diode	16.8..17.76V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
18X	-	TZT18XW	Z-diode	16.80..17.76V, Izt=5mA, Zzt=20Ω, 200mW	SOT-23	16dc	-	3a	Ttr
18X	-	Z02W18VX	Z-diode	16.80..17.76V, Izt=5mA, Zzt=20Ω, 200mW	SOT-23	16dc	-	3f	Kec
18Y	-	02CZ18-Y	Z-diode	17.46..18.43V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
18Y	-	TZT18YW	Z-diode	17.46..18.43V, Izt=5mA, Zzt=20Ω, 200mW	SOT-23	16dc	-	3a	Ttr
18Y	-	Z02W18VY	Z-diode	17.46..18.43V, Izt=5mA, Zzt=20Ω, 200mW	SOT-23	16dc	-	3f	Kec
18Z	-	02CZ18-Z	Z-diode	18.13..19.1V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
18Z	-	CZ1W18	Z-diode	18V±5%, Izt=14mA, 600mW	SOT-23	16dc	-	3a	Cdi
18Z	-	TZT18ZW	Z-diode	18.13..19.10V, Izt=5mA, Zzt=20Ω, 200mW	SOT-23	16dc	-	3a	Ttr
18Z	-	Z02W18VZ	Z-diode	18.13..19.10V, Izt=5mA, Zzt=20Ω, 200mW	SOT-23	16dc	-	3f	Kec
19	-	AP8822C-59GA	Vdet-IC	5.9V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
19	-	AP8822C-59GT	Vdet-IC	5.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
19	-	AP8822C-59PA	Vdet-IC	5.9V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
19	-	AP8822C-59PT	Vdet-IC	5.9V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
19	-	DTA115EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=100k/100k	SOT-416	16ta	-	3a	Rhm
19	-	DTA115EKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=100k/100k	SOT-346	16ta	-	3a	Rhm
19	-	DTA115EM	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=100k/100k	VMT3	18ta	-	3a	Rhm
19	-	DTA115EUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=100k/100k	UMT3	16ta	-	3a	Rhm
19	-	ELM7619HAB	Vdet-IC	1.9V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
19	-	ELM9719NBB	Vdet-IC	1.9V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
19	-	ELM9819BB	LVR-IC	1.9V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
19	-	PDTA143ZK	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k	SC-59	16ta	-	3a	Nxp
19	-	PDTC123YE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=2.2k/10k	SOT-416	16ta	-	3a	Nxp
-19	-	PDTC123YU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	SOT-323	16ta	-	3a	NxH
190AC	-	BL8509-190ACRM	Vdet-IC	1.9V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
190AC	-	LC9009CB3TR190AC	Vdet-IC	1.9V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
190AN	-	BL8509-190ANRM	Vdet-IC	1.9V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
190AN	-	LC9009CB3TR190AN	Vdet-IC	1.9V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
190BC	-	BL8509-190BCRM	Vdet-IC	1.9V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
190BC	-	LC9009CB3TR190BC	Vdet-IC	1.9V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
190BN	-	BL8509-190BNRM	Vdet-IC	1.9V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
190BN	-	LC9009CB3TR190BN	Vdet-IC	1.9V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
190CC	-	BL8509-190CCRM	Vdet-IC	1.9V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
190CC	-	LC9009CB3TR190CC	Vdet-IC	1.9V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
190CN	-	BL8509-190CNRM	Vdet-IC	1.9V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
190CN	-	LC9009CB3TR190CN	Vdet-IC	1.9V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
190DC	-	BL8509-190DCRM	Vdet-IC	1.9V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
190DC	-	LC9009CB3TR190DC	Vdet-IC	1.9V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
190DN	-	BL8509-190DNRM	Vdet-IC	1.9V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
190DN	-	LC9009CB3TR190DN	Vdet-IC	1.9V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
190EC	-	BL8509-190ECRM	Vdet-IC	1.9V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
190EC	-	LC9009CB3TR190EC	Vdet-IC	1.9V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
190EN	-	BL8509-190ENRM	Vdet-IC	1.9V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
190EN	-	LC9009CB3TR190EN	Vdet-IC	1.9V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
190FC	-	BL8509-190FCRM	Vdet-IC	1.9V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
190FC	-	LC9009CB3TR190FC	Vdet-IC	1.9V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
190FN	-	BL8509-190FNRM	Vdet-IC	1.9V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
190FN	-	LC9009CB3TR190FN	Vdet-IC	1.9V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
190GC	-	BL8509-190GCRM	Vdet-IC	1.9V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
190GC	-	LC9009CB3TR190GC	Vdet-IC	1.9V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
190GN	-	BL8509-190GNRM	Vdet-IC	1.9V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
190GN	-	LC9009CB3TR190GN	Vdet-IC	1.9V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
19-2	-	UTC8119-2	Vdet-IC	1.9V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
19-3	-	UTC8119-3	Vdet-IC	1.9V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
19-5	-	UTC8119-5	Vdet-IC	1.9V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
19A	-	AAT60019A-S2	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
19B	-	AAT60019B-S2	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
19C	-	AAT60019C-S2	Vdet-IC	1.9V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
19D	-	AAT60019D-S2	Vdet-IC	1.9V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
19N	-	STM1061N19W	Vdet-IC	1.9V±2%, -Reset ODO	SOT-323	16vda	VD6	3d	Ste
19N	-	STM1061N19WX	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Ste
19T	-	TK71519AS	LVR-IC	LDO, 1.9V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
19V	-	CHPZ19VPT	Z-diode	Dual, 18.0..20.0V, Izt=5mA, Zzt=45Ω, 350mW	SOT-23	16df	-	3a	Chm
1A	-	BC846A	Si-npn	GP, 80V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	PhH
1A	-	BC846AT	Si-npn	GP, 80V, 100mA, 150mW, B=110..220, >100MHz	SOT-416	16ta	-	3a	Phi
1A	-	BC846AW	Si-npn	GP, 80V, 100mA, 200mW, B=110..220, >100MHz	SOT-323	16ta	-	3a	PhH
1A	-	CMBT3904	Si-npn	GP, 60V, 200mA, 250mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	Cdi
1A	-	FMMT3904	Si-npn	GP, 60V, 0.1A, 200mW, B= 100..300, >300MHz	SOT-23	16ta	-	3a	Zx
1A	-	IRLML2402	n-MOSFET	V-MOS, LogL, 20V, 1.2A, <0.25Ω	SOT-23	16fh	-	3a	Irf
1A	-	KST3904	Si-npn	GP, 60V, 0.1A, 200mW, B= 100..300, >300MHz	SOT-23	16ta	-	3a	Sam
1A	-	MMBT3904	Si-npn	GP, 60V, 100mA, 200mW, B= 100..300, >300MHz	SOT-23	16ta	-	3a	Nsc
1A	-	SMBT3904	Si-npn	GP, 60V, 0.1A, 200mW, B= 100..300, >300MHz	SOT-23	16ta	-	3c	Inf
1A	-	TMPT3904	Si-npn	GP, 60V, 100mA, 200mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	All
1A	-	YTS3904	Si-npn	GP, 60V, 0.1A, 200mW, B= 100..300, >300MHz	SOT-23	16ta	-	3a	Tos
-1A	-	PMST3904	Si-npn	GP, 60V, 200mA, 200mW, B=60..300, >300MHz	SOT-323	16ta	-	3a	PhH
1A5	-	TC591002ECB	LVR-IC	LDO, -1.0V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
1A8	-	CMSZ5250B	Z-diode	20V±5%, 6.2mA, Zzt=25Ω, 275mW	SOT-323	16dc	-	3a	Cen
1AC	-	CMST3904	Si-npn	GP, 60V, 200mA, 275mW, B=100..300, >300MHz	SOT-323	16ta	-	3a	Cen
1AC2	-	81C10-P-AE3-2	Vdet-IC	1.0V±2%, -Reset PPO, 50ms	SOT-23	16vdy	VD7	3a	Utc
1AC2G	-	81C10G-P-AE3-2	Vdet-IC	1.0V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
1AC2L	-	81C10L-P-AE3-2	Vdet-IC	1.0V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
1AC3	-	81C10-P-AE3-3	Vdet-IC	1.0V±2%, -Reset PPO, 50ms	SOT-23	16vdb	VD7	3a	Utc
1AC3G	-	81C10G-P-AE3-3	Vdet-IC	1.0V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
1AC3L	-	81C10L-P-AE3-3	Vdet-IC	1.0V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
1AC5	-	81C10-P-AE3-5	Vdet-IC	1.0V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3a	Utc
1AC5G	-	81C10G-P-AE3-5	Vdet-IC	1.0V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
1AC5L	-	81C10L-P-AE3-5	Vdet-IC	1.0V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
1AG	-	2SC3339-GR	Si-npn	GP, 60V, 150mA, 150mW, B=200..400, >80MHz	SOT-23	16ta	-	3a	Tos
1AL	-	2SC3339-BL	Si-npn	GP, 60V, 150mA, 150mW, B=350..700, >80MHz	SOT-23	16ta	-	3a	Tos
1AM	-	MMBT3904	Si-npn	GP, 60V, 100mA, 200mW, B= 100..300, >300MHz	SOT-23	16ta	-	3a	Mot
1AN2	-	81N10-P-AE3-2	Vdet-IC	1.0V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
1AN2G	-	81N10G-P-AE3-2	Vdet-IC	1.0V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
1AN2L	-	81N10L-P-AE3-2	Vdet-IC	1.0V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
1AN3	-	81N10-P-AE3-3	Vdet-IC	1.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
1AN3G	-	81N10G-P-AE3-3	Vdet-IC	1.0V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
1AN3L	-	81N10L-P-AE3-3	Vdet-IC	1.0V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
1AN5	-	81N10-P-AE3-5	Vdet-IC	1.0V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
1AN5G	-	81N10G-P-AE3-5	Vdet-IC	1.0V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
1AN5L	-	81N10L-P-AE3-5	Vdet-IC	1.0V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
1AO	-	2SC3339-O	Si-npn	GP, 60V, 150mA, 150mW, B=70..140, >80MHz	SOT-23	16ta	-	3a	Tos
1Ap	-	BC846A	Si-npn	GP, 80V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	PhH
1Ap	-	BC846AW	Si-npn	GP, 80V, 100mA, 200mW, B=110..220, >100MHz	SOT-323	16ta	-	3a	PhH
1AQ	-	2SB1584-Q	Si-pnp	Lo-sat, 25V, 500mA, 150MHz, B=85..170	SOT-416	16ta	-	3a	Pan
1AQ	-	2SB779-Q	Si-pnp	AF-Drv, 25V, 500mA, 200mW, B=90..155, 150MHz	SC-59	16ta	-	3a	Pan
1AR	-	2SB1584-R	Si-pnp	Lo-sat, 25V, 500mA, 150MHz, B=120..240	SOT-416	16ta	-	3a	Pan
1AR	-	2SB779-R	Si-pnp	AF-Drv, 25V, 500mA, 200mW, B=130..220, 150MHz	SC-59	16ta	-	3a	Pan
1As	-	BC846A	Si-npn	GP, 80V, 100mA, 330mW, B=110..220, 250MHz	SOT-23	16ta	-	3a	Sie
1As	-	BC846AT	Si-npn	GP, 80V, 100mA, 250mW, B=110..220, >100MHz	SOT-416	16ta	-	3a	Inf
1As	-	BC846AW	Si-npn	GP, 80V, 100mA, 250mW, B=110..220, 250MHz	SOT-323	16ta	-	3c	Inf
1AS	-	2SB1584-S	Si-pnp	Lo-sat, 25V, 500mA, 150MHz, B=170..340	SOT-416	16ta	-	3a	Pan
1At	-	BC846A	Si-npn	GP, 80V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	PhM
1At	-	BC846AW	Si-npn	GP, 80V, 100mA, 200mW, B=110..220, >100MHz	SOT-323	16ta	-	3a	PhM
1AW	-	BC846A	Si-npn	GP, 80V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	PhC
1AW	-	BC846AW	Si-npn	GP, 80V, 100mA, 200mW, B=110..220, >100MHz	SOT-323	16ta	-	3a	PhC
1AY	-	2SC3339-Y	Si-npn	GP, 60V, 150mA, 150mW, B=120..240, >80MHz	SOT-23	16ta	-	3a	Tos
1B	-	2N2222	Si-npn	GP, 60V, 600mA, 330mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Nsc
1B	-	BC846B	Si-npn	GP, 80V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhH
1B	-	BC846B9	Si-npn	GP, 80V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	Di
1B	-	BC846BT	Si-npn	GP, 80V, 100mA, 150mW, B=200..450, >100MHz	SOT-416	16ta	-	3a	Phi
1B	-	BC846BW	Si-npn	GP, 80V, 100mA, 200mW, B=200..450, >100MHz	SOT-323	16ta	-	3a	PhH
1B	-	IRLML2803	n-MOSFET	V-MOS, LogL, 30V, 1.2A, <0.25Ω	SOT-23	16fh	-	3a	Irf
1B	-	KST2222	Si-npn	GP, 60V, 600mA, 350mW, B>75, >250MHz	SOT-23	16ta	-	3a	Sam
1B	-	MMBT2222	Si-npn	GP, 60V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Mot

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1B	-	R3131N21EC	Vdet-IC	2.1V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
1B	-	SMBT2222	Si-npn	GP, 60V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3c	Inf
1B	-	TMPT2222	Si-npn	GP, 60V, 0.8A, 200mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	All
1B	-	YTS2222	Si-npn	GP, 70V, 0.8A, 200mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Tos
-1B	-	PMST2222	Si-npn	Sw, 60V, 600mA, 200mW, B=120..300, >300MHz	SOT-323	16ta	-	3a	PhH
1B0	-	TC55RP112ECB	LVR-IC	LDO, 1.1V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
1B5	-	TC591102ECB	LVR-IC	LDO, -1.1V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
1B8	-	CMSZ5251B	Z-diode	22V±5%, 5.6mA, Zzt=29Ω, 275mW	SOT-323	16dc	-	3a	Cen
1BC2	-	81C11-P-AE3-2	Vdet-IC	1.1V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
1BC2G	-	81C11G-P-AE3-2	Vdet-IC	1.1V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
1BC2L	-	81C11L-P-AE3-2	Vdet-IC	1.1V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
1BC3	-	81C11-P-AE3-3	Vdet-IC	1.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
1BC3G	-	81C11G-P-AE3-3	Vdet-IC	1.1V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
1BC3L	-	81C11L-P-AE3-3	Vdet-IC	1.1V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
1BC5	-	81C11-P-AE3-5	Vdet-IC	1.1V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
1BC5G	-	81C11G-P-AE3-5	Vdet-IC	1.1V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
1BC5L	-	81C11L-P-AE3-5	Vdet-IC	1.1V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
1BG	-	2SC3340-GR	Si-npn	GP, 120V, 100mA, 150mW, B=200..400, 100MHz	SOT-23	16ta	-	3a	Tos
1BL	-	2SC3340-BL	Si-npn	GP, 120V, 100mA, 150mW, B=350..700, 100MHz	SOT-23	16ta	-	3a	Tos
1BN2	-	81N11-P-AE3-2	Vdet-IC	1.1V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
1BN2G	-	81N11G-P-AE3-2	Vdet-IC	1.1V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
1BN2L	-	81N11L-P-AE3-2	Vdet-IC	1.1V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
1BN3	-	81N11-P-AE3-3	Vdet-IC	1.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
1BN3G	-	81N11G-P-AE3-3	Vdet-IC	1.1V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
1BN3L	-	81N11L-P-AE3-3	Vdet-IC	1.1V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
1BN5	-	81N11-P-AE3-5	Vdet-IC	1.1V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
1BN5G	-	81N11G-P-AE3-5	Vdet-IC	1.1V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
1BN5L	-	81N11L-P-AE3-5	Vdet-IC	1.1V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
1Bp	-	BC846B	Si-npn	GP, 80V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhH
1Bp	-	BC846BW	Si-npn	GP, 80V, 100mA, 200mW, B=200..450, >100MHz	SOT-323	16ta	-	3a	PhH
1Bs	-	BC846B	Si-npn	GP, 80V, 100mA, 330mW, B=200..450, 250MHz	SOT-23	16ta	-	3a	Sie
1Bs	-	BC846BT	Si-npn	GP, 80V, 100mA, 330mW, B=200..450, 250MHz	SOT-416	16ta	-	3a	Inf
1Bs	-	BC846BW	Si-npn	GP, 80V, 100mA, 250mW, B=200..450, 250MHz	SOT-323	16ta	-	3c	Inf
1Bt	-	BC846B	Si-npn	GP, 80V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhM
1Bt	-	BC846BW	Si-npn	GP, 80V, 100mA, 200mW, B=200..450, >100MHz	SOT-323	16ta	-	3a	PhM
1BW	-	BC846B	Si-npn	GP, 80V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhC
1BW	-	BC846BW	Si-npn	GP, 80V, 100mA, 200mW, B=200..450, >100MHz	SOT-323	16ta	-	3a	PhC
1BZ	-	FMMT2222	Si-npn	GP, 60V, 600mA, 330mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Zx
1C	-	BC846C	Si-npn	GP, 80V, 100mA, 300mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	Mot
1C	-	FMMTA20	Si-npn	GP, 40V, 100mA, 330mW, B=40..400, >125MHz	SOT-23	16ta	-	3a	Zx
1C	-	IRLML6302	p-MOSFET	V-MOS, LogL, 20V, 0.78A, <0.6Ω	SOT-23	16fh	-	3a	Irf
1C	-	KST20	Si-npn	GP, 40V, 100mA, 350mW, B=40..400, >125MHz	SOT-23	16ta	-	3a	Sam
1C	-	MMBTA20	Si-npn	GP, 40V, 100mA, 225mW, B40..400, >125MHz	SOT-23	16ta	-	3a	Mot
1C	-	R3131N31EC	Vdet-IC	3.1V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
1C0	-	TC55RP122ECB	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
1C3	-	ZXTN25012EFH	Si-npn	Sw, 20V, 6A, 1.25W, B=500..1500, 260MHz	SOT-23	16ta	-	3a	Zx
1C5	-	TC591202ECB	LVR-IC	LDO, -1.2V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
1C8	-	CMSZ5252B	Z-diode	24V±5%, 5.2mA, Zzt=33Ω, 275mW	SOT-323	16dc	-	3a	Cen
1CC2	-	81C12-P-AE3-2	Vdet-IC	1.2V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
1CC2G	-	81C12G-P-AE3-2	Vdet-IC	1.2V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
1CC2L	-	81C12L-P-AE3-2	Vdet-IC	1.2V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
1CC3	-	81C12-P-AE3-3	Vdet-IC	1.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
1CC3G	-	81C12G-P-AE3-3	Vdet-IC	1.2V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
1CC3L	-	81C12L-P-AE3-3	Vdet-IC	1.2V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
1CC5	-	81C12-P-AE3-5	Vdet-IC	1.2V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
1CC5G	-	81C12G-P-AE3-5	Vdet-IC	1.2V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
1CC5L	-	81C12L-P-AE3-5	Vdet-IC	1.2V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
1CL	-	2SC4082-L	Si-npn	VHF/UHF, 30V, 50mA, 200mW, B=27..56, >1.5GHz	SOT-323	16ta	-	3a	Rhm
1CM	-	2SC4082-M	Si-npn	VHF/UHF, 30V, 50mA, 200mW, B=39..82, >1.5GHz	SOT-323	16ta	-	3a	Rhm
1CN	-	2SC4082-N	Si-npn	VHF/UHF, 30V, 50mA, 200mW, B=56..120, >1.5GHz	SOT-323	16ta	-	3a	Rhm
1CN2	-	81N12-P-AE3-2	Vdet-IC	1.2V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
1CN2G	-	81N12G-P-AE3-2	Vdet-IC	1.2V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
1CN2L	-	81N12L-P-AE3-2	Vdet-IC	1.2V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
1CN3	-	81N12-P-AE3-3	Vdet-IC	1.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
1CN3G	-	81N12G-P-AE3-3	Vdet-IC	1.2V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
1CN3L	-	81N12L-P-AE3-3	Vdet-IC	1.2V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
1CN5	-	81N12-P-AE3-5	Vdet-IC	1.2V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
1CN5G	-	81N12G-P-AE3-5	Vdet-IC	1.2V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
1CN5L	-	81N12L-P-AE3-5	Vdet-IC	1.2V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
1CO	-	2SC3341-O	Si-npn	AF, 35V, 500mA, 200mW, B=70..140, 300MHz	SOT-23	16ta	-	3a	Tos





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1Cp	-	BAP50-05	PIN-diode	Dual, RF, 50V, 50mA, 500mW, 0.3pF, 3Ω(10mA/100MHz)	SOT-23	16dg	-	3a	PhH
1CP	-	2SC4082-P	Si-npn	VHF/UHF, 30V, 50mA, 200mW, B=82..180, >1.5GHz	SOT-323	16ta	-	3a	Rhm
1CQ	-	2SC4082-Q	Si-npn	VHF/UHF, 30V, 50mA, 200mW, B=120..270, >1.5GHz	SOT-323	16ta	-	3a	Rhm
1Ct	-	BAP50-05	PIN-diode	Dual, RF, 50V, 50mA, 500mW, 0.3pF, 3Ω(10mA/100MHz)	SOT-23	16dg	-	3a	PhM
1CW	-	BAP50-05	PIN-diode	Dual, RF, 50V, 50mA, 500mW, 0.3pF, 3Ω(10mA/100MHz)	SOT-23	16dg	-	3a	PhC
1CY	-	2SC3341-Y	Si-npn	AF, 35V, 500mA, 200mW, B=120..240 300MHz	SOT-23	16ta	-	3a	Tos
1D	-	2SC4083	Si-npn	HF, TV-Tun, 11V, 50mA, 200mW, 3.2GHz, B=120..270, Halogen free	UMT3	18ta	-	3a	Rhm
1D	-	BC846	Si-npn	GP, 80V, 100mA, 250mW, B=110..450, >100MHz	SOT-23	16ta	-	3a	PhH
1D	-	BC846W	Si-npn	GP, 80V, 100mA, 200mW, B=110..450, >100MHz	SOT-323	16ta	-	3a	PhH
1D	-	IRLML5103	p-MOSFET	V-MOS, LogL, 30V, 0.76A, <0.6Ω	SOT-23	16fh	-	3a	Irf
1D	-	KST42	Si-npn	Vid, 300/300V, 500mA, 350mW, B>40, >50MHz	SOT-23	16ta	-	3a	Sam
1D	-	MBTA42	Si-npn	Vid, 300/300V, 500mA, 250mW, B>40, 50MHz	SOT-23	16ta	-	3a	Tos
1D	-	MMBTA42	Si-npn	Vid, 300V, 200mA, 350mW, B>25, >50MHz	SOT-23	16ta	-	3a	Ons
1D	-	MMBTA42L	Si-npn	Vid, 300V, 200mA, 350mW, B>25, >50MHz	SOT-23	16ta	-	3a	Ons
1D	-	R3131N41EC	Vdet-IC	4.1V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
1D	-	SMBTA20	Si-npn	GP, 40V, 100mA, 330mW, B=40..400, >125MHz	SOT-23	16ta	-	3g	Vs
1D	-	SMBTA42	Si-npn	Vid, 300V, 500mA, 1W, B>40, >50MHz	SOT-23	16ta	-	3c	Inf
1D	-	TMPTA42	Si-npn	Vid, 300/300V, 500mA, 350mW, B>40, >50MHz	SOT-23	16ta	-	3a	All
-1D	-	PMSTA42	Si-npn	Vid, 300/300V, 100mA, 200mW, B>25, >50MHz	SOT-323	16ta	-	3a	PhH
1D0	-	TC55RP132ECB	LVR-IC	LDO, 1.3V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
1D5	-	TC591302ECB	LVR-IC	LDO, -1.3V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
1D8	-	CMSZ5253B	Z-diode	25V±5%, 5.0mA, Zzt=35Ω, 275mW	SOT-323	16dc	-	3a	Cen
1DC2	-	81C13-P-AE3-2	Vdet-IC	1.3V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
1DC2G	-	81C13G-P-AE3-2	Vdet-IC	1.3V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
1DC2L	-	81C13L-P-AE3-2	Vdet-IC	1.3V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
1DC3	-	81C13-P-AE3-3	Vdet-IC	1.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
1DC3G	-	81C13G-P-AE3-3	Vdet-IC	1.3V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
1DC3L	-	81C13L-P-AE3-3	Vdet-IC	1.3V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
1DC5	-	81C13-P-AE3-5	Vdet-IC	1.3V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
1DC5G	-	81C13G-P-AE3-5	Vdet-IC	1.3V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
1DC5L	-	81C13L-P-AE3-5	Vdet-IC	1.3V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
1DK	-	BTC4061N3-K	Si-npn	GP, HV, 300V, 500mA, 225mW, B=52..120, >50MHz	SOT-23	16ta	-	3a	Cys
1DL	-	2SC4083-L	Si-npn	VHF/UHF, 20V, 50mA, 200mW, B=27..56, 3.2GHz	SOT-323	16ta	-	3a	Rhm
1DM	-	2SC4083-M	Si-npn	VHF/UHF, 20V, 50mA, 200mW, B=39..82, 3.2GHz	SOT-323	16ta	-	3a	Rhm
1DN	-	2SC4083-N	Si-npn	VHF/UHF, 20V, 50mA, 200mW, B=56..120, 3.2GHz	SOT-323	16ta	-	3a	Rhm
1DN2	-	81N13-P-AE3-2	Vdet-IC	1.3V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
1DN2G	-	81N13G-P-AE3-2	Vdet-IC	1.3V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
1DN2L	-	81N13L-P-AE3-2	Vdet-IC	1.3V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
1DN3	-	81N13-P-AE3-3	Vdet-IC	1.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
1DN3G	-	81N13G-P-AE3-3	Vdet-IC	1.3V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
1DN3L	-	81N13L-P-AE3-3	Vdet-IC	1.3V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
1DN5	-	81N13-P-AE3-5	Vdet-IC	1.3V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
1DN5G	-	81N13G-P-AE3-5	Vdet-IC	1.3V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
1DN5L	-	81N13L-P-AE3-5	Vdet-IC	1.3V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
1Dp	-	BC846	Si-npn	GP, 80V, 100mA, 250mW, B=110..450, >100MHz	SOT-23	16ta	-	3a	PhH
1Dp	-	BC846W	Si-npn	GP, 80V, 100mA, 200mW, B=110..450, >100MHz	SOT-323	16ta	-	3a	PhH
1DP	-	2SC4083-P	Si-npn	VHF/UHF, 20V, 50mA, 200mW, B=82..180, 3.2GHz	SOT-323	16ta	-	3a	Rhm
1DP	-	BTC4061N3-P	Si-npn	GP, HV, 300V, 500mA, 225mW, B=82..180, >50MHz	SOT-23	16ta	-	3a	Cys
1DQ	-	2SC4083-Q	Si-npn	VHF/UHF, 20V, 50mA, 200mW, B=120..270, 3.2GHz	SOT-323	16ta	-	3a	Rhm
1DQ	-	BTC4061N3-Q	Si-npn	GP, HV, 300V, 500mA, 225mW, B=230..270, >50MHz	SOT-23	16ta	-	3a	Cys
1DR	-	2SD1328-R	Si-npn	AF-Amp, 25V, 500mA, 200mW, 200MHz, B=200..350	SC-59	16ta	-	3a	Pan
1DR	-	MSD1328	Si-npn	GP, 25V, 500mA, 200mW, B=2200..350, <300µs	SOT-23	16ta	-	3a	Wtr
1DR	-	MSD1328-R	Si-npn	GP, 25V, 500mA, 200mW, B=200..350	SOT-323	16ta	-	3a	Mot
1DS	-	2SD1328-S	Si-npn	AF-Amp, 25V, 500mA, 200mW, 200MHz, B=300..500	SC-59	16ta	-	3a	Pan
1Dt	-	BC846	Si-npn	GP, 80V, 100mA, 250mW, B=110..450, >100MHz	SOT-23	16ta	-	3a	PhM
1Dt	-	BC846W	Si-npn	GP, 80V, 100mA, 200mW, B=110..450, >100MHz	SOT-323	16ta	-	3a	PhM
1DT	-	2SD1328-T	Si-npn	AF-Amp, 25V, 500mA, 200mW, 200MHz, B=400..800	SC-59	16ta	-	3a	Pan
1DW	-	BC846	Si-npn	GP, 80V, 100mA, 250mW, B=110..450, >100MHz	SOT-23	16ta	-	3a	PhC
1DW	-	BC846W	Si-npn	GP, 80V, 100mA, 200mW, B=110..450, >100MHz	SOT-323	16ta	-	3a	PhC
1E	-	BC847A	Si-npn	GP, 50V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	PhH
1E	-	BC847AF	Si-npn	GP, 50V, 100mA, 250mW, B=110..220, 250MHz	SOT-490	18ta	-	3a	Phi
1E	-	BC847AT	Si-npn	GP, 50V, 100mA, 150mW, B=110..220, >100MHz	SOT-416	16ta	-	3a	Phi
1E	-	BC847AW	Si-npn	GP, 50V, 100mA, 200mW, B=110..220, >100MHz	SOT-323	16ta	-	3a	PhH
1E	-	CM9NB847A	Si-npn	AF, Sw, 50V, 100mA, 200mW, B=110..220, 100MHz	SOT-23	16ta	-	3a	Can
1E	-	CM9NB847AW	Si-npn	AF, Sw, 50V, 100mA, 150mW, B=110..220, 100MHz	SOT-323	16ta	-	3a	Can
1E	-	FMMTA43	Si-npn	Vid, 200V, 200mA, 330mW, B=50..200, >50MHz	SOT-23	16ta	-	3a	Zx
1E	-	KST43	Si-npn	Vid, 200V, 500mA, 350mW, B>40, >50MHz	SOT-23	16ta	-	3a	Sam
1E	-	MMBTA43	Si-npn	Vid, 200V, 500mA, 300mW, B>40, >50MHz	SOT-23	16ta	-	3a	Itt
1E	-	R3131N29EC3	Vdet-IC	2.9V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
1E	-	SMBTA43	Si-npn	Vid, 200/200V, 200mA, 350mW, B>25, >50MHz	SOT-23	16ta	-	3c	Inf



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1E	-	TMPTA43	Si-npn	Vid, 200/200V, 200mA, 350mW, B>25, >50MHz	SOT-23	16ta	-	3a	All
-1E	-	PMSTA43	Si-npn	Vid, 200/200V, 100mA, 200mW, B>25, >50MHz	SOT-323	16ta	-	3a	PhH
1E0	-	TC55RP142ECB	LVR-IC	LDO, 1.4V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
1E5	-	TC591402ECB	LVR-IC	LDO, -1.4V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
1E8	-	CMSZ5254B	Z-diode	27V±5%, 4.6mA, Zzt=41Ω, 275mW	SOT-323	16dc	-	3a	Cen
1EC2	-	81C14-P-AE3-2	Vdet-IC	1.4V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
1EC2G	-	81C14G-P-AE3-2	Vdet-IC	1.4V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
1EC2L	-	81C14L-P-AE3-2	Vdet-IC	1.4V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
1EC3	-	81C14-P-AE3-3	Vdet-IC	1.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
1EC3G	-	81C14G-P-AE3-3	Vdet-IC	1.4V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
1EC3L	-	81C14L-P-AE3-3	Vdet-IC	1.4V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
1EC5	-	81C14-P-AE3-5	Vdet-IC	1.4V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
1EC5G	-	81C14G-P-AE3-5	Vdet-IC	1.4V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
1EC5L	-	81C14L-P-AE3-5	Vdet-IC	1.4V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
1EL	-	2SC4084-L	Si-npn	VHF/UHF, 30V, 50mA, 150mW, >2GHz, B=27..56	SOT-323	16ta	-	3a	Rhm
1EM	-	2SC4084-M	Si-npn	VHF/UHF, 30V, 50mA, 150mW, >2GHz, B=39..82	SOT-323	16ta	-	3a	Rhm
1EN	-	2SC4084-N	Si-npn	VHF/UHF, 30V, 50mA, 150mW, >2GHz, B=56..120	SOT-323	16ta	-	3a	Rhm
1EN2	-	81N14-P-AE3-2	Vdet-IC	1.4V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
1EN2G	-	81N14G-P-AE3-2	Vdet-IC	1.4V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
1EN2L	-	81N14L-P-AE3-2	Vdet-IC	1.4V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
1EN3	-	81N14-P-AE3-3	Vdet-IC	1.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
1EN3G	-	81N14G-P-AE3-3	Vdet-IC	1.4V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
1EN3L	-	81N14L-P-AE3-3	Vdet-IC	1.4V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
1EN5	-	81N14-P-AE3-5	Vdet-IC	1.4V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
1EN5G	-	81N14G-P-AE3-5	Vdet-IC	1.4V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
1EN5L	-	81N14L-P-AE3-5	Vdet-IC	1.4V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
1Ep	-	BC847A	Si-npn	GP, 50V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	PhH
1Ep	-	BC847AW	Si-npn	GP, 50V, 100mA, 200mW, B=110..220, >100MHz	SOT-323	16ta	-	3a	PhH
1EP	-	2SC4084-P	Si-npn	VHF/UHF, 30V, 50mA, 150mW, >2GHz, B=82..180	SOT-323	16ta	-	3a	Rhm
1EQ	-	2SC4084-Q	Si-npn	VHF/UHF, 30V, 50mA, 150mW, >2GHz, B=120..270	SOT-323	16ta	-	3a	Rhm
1Es	-	BC847A	Si-npn	GP, 50V, 100mA, 330mW, B=110..220, 250MHz	SOT-23	16ta	-	3a	Sie
1Es	-	BC847AT	Si-npn	GP, 50V, 100mA, 330mW, B=110..220, 250MHz	SOT-416	16ta	-	3a	Inf
1Es	-	BC847AW	Si-npn	GP, 50V, 100mA, 250mW, B=110..220, 250MHz	SOT-323	16ta	-	3c	Inf
1Et	-	BC847A	Si-npn	GP, 50V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	PhM
1Et	-	BC847AW	Si-npn	GP, 50V, 100mA, 200mW, B=110..220, >100MHz	SOT-323	16ta	-	3a	PhM
1EW	-	BC847A	Si-npn	GP, 50V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	PhC
1EW	-	BC847AW	Si-npn	GP, 50V, 100mA, 200mW, B=110..220, >100MHz	SOT-323	16ta	-	3a	PhC
1F	-	BC847B	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhH
1F	-	BC847BF	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, 250MHz	SOT-490	18ta	-	3a	Phi
1F	-	BC847BT	Si-npn	GP, 50V, 100mA, 150mW, B=200..450, >100MHz	SOT-416	16ta	-	3a	Phi
1F	-	BC847BW	Si-npn	GP, 50V, 100mA, 200mW, B=200..450, >100MHz	SOT-323	16ta	-	3a	PhH
1F	-	CH847BPT-R	Si-npn	AF, Sw, 45V, 100mA, B=200..450, 200MHz	SOT-23	16ta	-	3a	Chm
1F	-	CM9NB847B	Si-npn	AF, Sw, 50V, 100mA, 200mW, B=200..450, 100MHz	SOT-23	16ta	-	3a	Can
1F	-	CM9NB847BW	Si-npn	AF, Sw, 50V, 100mA, 150mW, B=200..450, 100MHz	SOT-323	16ta	-	3a	Can
1F	-	KST5550	Si-npn	Vid, 160V, 600mA, 350mW, B=60..250, >150MHz	SOT-23	16ta	-	3a	Sam
-1F	-	PMST5550	Si-npn	HV, 160V, 300mA, 200mW, B=60..250, 100..300MHz	SOT-323	16ta	-	3a	PhH
1F0	-	TC55RP152ECB	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
1F5	-	TC591502ECB	LVR-IC	LDO, -1.5V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
1F8	-	CMSZ5255B	Z-diode	28V±5%, 4.5mA, Zzt=44Ω, 275mW	SOT-323	16dc	-	3a	Cen
1FC2	-	81C15-P-AE3-2	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
1FC2G	-	81C15G-P-AE3-2	Vdet-IC	1.5V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
1FC2L	-	81C15L-P-AE3-2	Vdet-IC	1.5V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
1FC3	-	81C15-P-AE3-3	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
1FC3G	-	81C15G-P-AE3-3	Vdet-IC	1.5V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
1FC3L	-	81C15L-P-AE3-3	Vdet-IC	1.5V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
1FC5	-	81C15-P-AE3-5	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
1FC5G	-	81C15G-P-AE3-5	Vdet-IC	1.5V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
1FC5L	-	81C15L-P-AE3-5	Vdet-IC	1.5V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
1FF	-	CMPT5551	Si-npn	Sw, 180V, 600mA, 350mW, B=80..250, 100..300MHz	SOT-23	16ta	-	3a	Cen
1FN2	-	81N15-P-AE3-2	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
1FN2G	-	81N15G-P-AE3-2	Vdet-IC	1.5V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
1FN2L	-	81N15L-P-AE3-2	Vdet-IC	1.5V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
1FN3	-	81N15-P-AE3-3	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
1FN3G	-	81N15G-P-AE3-3	Vdet-IC	1.5V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
1FN3L	-	81N15L-P-AE3-3	Vdet-IC	1.5V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
1FN5	-	81N15-P-AE3-5	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
1FN5G	-	81N15G-P-AE3-5	Vdet-IC	1.5V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
1FN5L	-	81N15L-P-AE3-5	Vdet-IC	1.5V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
1Fp	-	BC847B	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhH
1Fp	-	BC847BW	Si-npn	GP, 50V, 100mA, 200mW, B=200..450, >100MHz	SOT-323	16ta	-	3a	PhH



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1FP	-	2SK321-P	n-FET	Video-Cam, 15V, 50mA, 200mW, Idss=5..16mA,Up<3V	SOT-23	16fa	-	3a	Pan
1FQ	-	2SK321-Q	n-FET	Video-Cam, 15V, 50mA, 200mW, Idss=14..24mA,Up<3V	SOT-23	16fa	-	3a	Pan
1FR	-	2SK321-R	n-FET	Video-Cam, 15V, 50mA, 200mW, Idss=20..32mA,Up<3V	SOT-23	16fa	-	3a	Pan
1Fs	-	BC847B	Si-npn	GP, 50V, 100mA, 330mW, B=200..450, 250MHz	SOT-23	16ta	-	3c	Inf
1Fs	-	BC847BT	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, >100MHz	SOT-416	16ta	-	3a	Sie
1Fs	-	BC847BW	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, 250MHz	SOT-323	16ta	-	3c	Inf
1FS	-	2SK321-S	n-FET	Video-Cam, 15V, 50mA, 200mW, Idss=28..42mA,Up<3V	SOT-23	16fa	-	3a	Pan
1Ft	-	BC847B	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhM
1Ft	-	BC847BW	Si-npn	GP, 50V, 100mA, 200mW, B=200..450, >100MHz	SOT-323	16ta	-	3a	PhM
1FW	-	BC847B	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhC
1FW	-	BC847BW	Si-npn	GP, 50V, 100mA, 200mW, B=200..450, >100MHz	SOT-323	16ta	-	3a	PhC
1FZ	-	FMBT5550	Si-npn	HV, 140V, 600mA, 225mW, B=80..250, >300MHz	SOT-23	16ta	-	3a	Zx
1G	-	BC847C	Si-npn	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhH
1G	-	BC847CF	Si-npn	GP, 50V, 100mA, 250mW, B=420..800, 250MHz	SOT-490	18ta	-	3a	Phi
1G	-	BC847CT	Si-npn	GP, 50V, 100mA, 150mW, B=420..800, >100MHz	SOT-416	16ta	-	3a	Phi
1G	-	BC847CW	Si-npn	GP, 50V, 100mA, 200mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	PhH
1G	-	CM9NB847C	Si-npn	AF, Sw, 50V, 100mA, 200mW, B=4520..800, 100MHz	SOT-23	16ta	-	3a	Can
1G	-	CM9NB847CW	Si-npn	AF, Sw, 50V, 100mA, 150mW, B=4520..800, 100MHz	SOT-323	16ta	-	3a	Can
1G	-	CMBTA06	Si-npn	GP, 80V, 500mA, 250mW, B>100, >100MHz	SOT-23	16ta	-	3a	Cdi
1G	-	CMBTA14	Si-npn-Darl	GP, 60V, 500mA, 250mW, B>10000, >125MHz	SOT-23	16ta	-	3a	Cdi
1G	-	FMMTA06	Si-npn	GP, 80V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	Zx
1G	-	KST06	Si-npn	AF-Drv, 80V, 500mA, 350mW, B>50, >100MHz	SOT-23	16ta	-	3a	Sam
1G	-	MMBTA06	Si-npn	GP, 80V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3g	Vs
1G	-	R3131N21EA	Vdet-IC	2.1V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
1G	-	SMBTA06	Si-npn	GP, 80V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3c	Inf
1G	-	TMPTA06	Si-npn	GP, 80V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	All
-1G	-	PMSTA06	Si-npn	GP, 80V, 500mA, 200mW, B>50, >100MHz	SOT-323	16ta	-	3a	PhH
1G5	-	ZXTP25100CFH	Si-pnp	Sw, HV, Drv, 115V, 1A, 730mW, B=200..500, 180MHz	SOT-23	16ta	-	3a	Zx
1G8	-	CMSZ5256B	Z-diode	30V±5%, 4.2mA, Zzt=49Ω, 275mW	SOT-323	16dc	-	3a	Cen
1GC2	-	81C16-P-AE3-2	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
1GC2G	-	81C16G-P-AE3-2	Vdet-IC	1.6V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
1GC2L	-	81C16L-P-AE3-2	Vdet-IC	1.6V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
1GC3	-	81C16-P-AE3-3	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
1GC3G	-	81C16G-P-AE3-3	Vdet-IC	1.6V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
1GC3L	-	81C16L-P-AE3-3	Vdet-IC	1.6V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
1GC5	-	81C16-P-AE3-5	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
1GC5G	-	81C16G-P-AE3-5	Vdet-IC	1.6V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
1GC5L	-	81C16L-P-AE3-5	Vdet-IC	1.6V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
1GM	-	MMBTA06	Si-npn	GP, 80V, 500mA, 225mW, B>100, >100MHz	SOT-23	16ta	-	3a	Mot
1GN2	-	81N16-P-AE3-2	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
1GN2G	-	81N16G-P-AE3-2	Vdet-IC	1.6V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
1GN2L	-	81N16L-P-AE3-2	Vdet-IC	1.6V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
1GN3	-	81N16-P-AE3-3	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
1GN3G	-	81N16G-P-AE3-3	Vdet-IC	1.6V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
1GN3L	-	81N16L-P-AE3-3	Vdet-IC	1.6V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
1GN5	-	81N16-P-AE3-5	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
1GN5G	-	81N16G-P-AE3-5	Vdet-IC	1.6V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
1GN5L	-	81N16L-P-AE3-5	Vdet-IC	1.6V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
1Gp	-	BC847C	Si-npn	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhH
1Gp	-	BC847CW	Si-npn	GP, 50V, 100mA, 200mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	PhH
1Gs	-	BC847C	Si-npn	GP, 50V, 100mA, 330mW, B=420..800, 250MHz	SOT-23	16ta	-	3a	Sie
1Gs	-	BC847CT	Si-npn	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-416	16ta	-	3a	Inf
1Gs	-	BC847CW	Si-npn	GP, 50V, 100mA, 250mW, B=420..800, 250MHz	SOT-323	16ta	-	3c	Inf
1Gt	-	BC847C	Si-npn	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhM
1Gt	-	BC847CW	Si-npn	GP, 50V, 100mA, 200mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	PhM
1GT	-	SOA06	Si-npn	GP, 80V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	Ste
1GW	-	BC847C	Si-npn	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhC
1GW	-	BC847CW	Si-npn	GP, 50V, 100mA, 200mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	PhC
1GZ	-	BC847C	Si-npn	GP, 50V, 100mA, 330mW, B=420..800, >300MHz	SOT-23	16ta	-	3a	Zx
1H	-	2SK0123	n-FET	Imped-conv, 20V, 2mA, 100mW, Idss=95..480µA, 1.6ms	Mini3-G1	16fj	-	3a	Pan
1H	-	2SK123	n-FET	Imped-conv, 20V, 2mA, 100mW, Idss=95..480µA, 1.6ms	Mini3-G1	16fj	-	3a	Pan
1H	-	2SK1860	n-FET	AF imp-conv, 20V, 2mA, 150mW, Idss<0.48mA	Minit3-F1	16fj	-	3a	Pan
1H	-	BC847	Si-npn	GP, 50V, 100mA, 250mW, B=110..800, >100MHz	SOT-23	16ta	-	3a	PhH
1H	-	BC847W	Si-npn	GP, 50V, 100mA, 200mW, B=110..800, >100MHz	SOT-323	16ta	-	3a	PhH
1H	-	CMBTA05	Si-npn	GP, 60V, 500mA, 250mW, B>100, >100MHz	SOT-23	16ta	-	3a	Cdi
1H	-	CMBTA13	Si-npn-Darl	GP, 60V, 500mA, 250mW, B>5000, >125MHz	SOT-23	16ta	-	3a	Cdi
1H	-	FMMTA05	Si-npn	GP, 60V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	Zx
1H	-	KST05	Si-npn	AF-Drv, 60V, 500mA, 350mW, B>50, >100MHz	SOT-23	16ta	-	3a	Sam
1H	-	MMBTA05	Si-npn	GP, 60V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3g	Ons
1H	-	R3131N31EA	Vdet-IC	3.1V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1H	-	SMBTA05	Si-npn	GP, 60V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3c	Inf
1H	-	TMPTA05	Si-npn	GP, 60V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	All
-1H	-	PMSTA05	Si-npn	GP, 60V, 500mA, 200mW, B>50, >100MHz	SOT-323	16ta	-	3a	PhH
1H0	-	TC55RP162ECB	LVR-IC	LDO, 1.6V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
1H5	-	TC591602ECB	LVR-IC	LDO, -1.6V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
1H8	-	CMSZ5257B	Z-diode	33V±5%, 3.8mA, Zzt=58Ω, 275mW	SOT-323	16dc	-	3a	Cen
1HC2	-	81C17-P-AE3-2	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
1HC2G	-	81C17G-P-AE3-2	Vdet-IC	1.7V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
1HC2L	-	81C17L-P-AE3-2	Vdet-IC	1.7V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
1HC3	-	81C17-P-AE3-3	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
1HC3G	-	81C17G-P-AE3-3	Vdet-IC	1.7V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
1HC3L	-	81C17L-P-AE3-3	Vdet-IC	1.7V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
1HC5	-	81C17-P-AE3-5	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
1HC5G	-	81C17G-P-AE3-5	Vdet-IC	1.7V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
1HC5L	-	81C17L-P-AE3-5	Vdet-IC	1.7V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
1HD	-	L8550HQLT1	Si-pnp	GP, 40V, 1.5A, 225mW, B=150..300	SOT-23	16ta	-	3a	Lrc
1HN2	-	81N17-P-AE3-2	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
1HN2G	-	81N17G-P-AE3-2	Vdet-IC	1.7V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
1HN2L	-	81N17L-P-AE3-2	Vdet-IC	1.7V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
1HN3	-	81N17-P-AE3-3	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
1HN3G	-	81N17G-P-AE3-3	Vdet-IC	1.7V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
1HN3L	-	81N17L-P-AE3-3	Vdet-IC	1.7V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
1HN5	-	81N17-P-AE3-5	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
1HN5G	-	81N17G-P-AE3-5	Vdet-IC	1.7V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
1HN5L	-	81N17L-P-AE3-5	Vdet-IC	1.7V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
1Hp	-	BC847	Si-npn	GP, 50V, 100mA, 250mW, B=110..800, >100MHz	SOT-23	16ta	-	3a	PhH
1Hp	-	BC847W	Si-npn	GP, 50V, 100mA, 200mW, B=110..800, >100MHz	SOT-323	16ta	-	3a	PhH
1Ht	-	BC847	Si-npn	GP, 50V, 100mA, 250mW, B=110..800, >100MHz	SOT-23	16ta	-	3a	PhM
1Ht	-	BC847W	Si-npn	GP, 50V, 100mA, 200mW, B=110..800, >100MHz	SOT-323	16ta	-	3a	PhM
1HT	-	SOA05	Si-npn	GP, 60V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	Ste
1HW	-	BC847	Si-npn	GP, 50V, 100mA, 250mW, B=110..800, >100MHz	SOT-23	16ta	-	3a	PhC
1HW	-	BC847W	Si-npn	GP, 50V, 100mA, 200mW, B=110..800, >100MHz	SOT-323	16ta	-	3a	PhC
1J	-	BC848A	Si-npn	GP, 30V, 100mA, 150mW, B=110..220, 300MHz	SOT-23	16ta	-	3a	Di
1J	-	BC848AF	Si-npn	GP, 30V, 100mA, 200mW, B=110..220, 150MHz	SOT-490	18ta	-	3a	Phi
1J	-	BC848AT	Si-npn	GP, 30V, 100mA, 200mW, B=140, >100MHz	SOT-416	16ta	-	3a	Phi
1J	-	BC848AW	Si-npn	GP, 30V, 100mA, 310mW, B=110..220, >300MHz	SOT-323	16ta	-	3a	Ons
1J	-	FMMT2369	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120	SOT-23	16ta	-	3a	Zx
1J	-	MMBT2369	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120	SOT-23	16ta	-	3a	Mot
1J	-	R3131N41EA	Vdet-IC	4.1V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
-1J	-	PMST2369	Si-npn	Sw, 40V, 200mA, 200mW, B=40..120, >500MHz	SOT-323	16ta	-	3a	PhH
1J8	-	CMSZ5258B	Z-diode	36V±5%, 3.4mA, Zzt=70Ω, 275mW	SOT-323	16dc	-	3a	Cen
1JA	-	MMBT2369A	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120	SOT-23	16ta	-	3a	Mot
1JC2	-	81C18-P-AE3-2	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
1JC2G	-	81C18G-P-AE3-2	Vdet-IC	1.8V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
1JC2L	-	81C18L-P-AE3-2	Vdet-IC	1.8V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
1JC3	-	81C18-P-AE3-3	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
1JC3G	-	81C18G-P-AE3-3	Vdet-IC	1.8V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
1JC3L	-	81C18L-P-AE3-3	Vdet-IC	1.8V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
1JC5	-	81C18-P-AE3-5	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
1JC5G	-	81C18G-P-AE3-5	Vdet-IC	1.8V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
1JC5L	-	81C18L-P-AE3-5	Vdet-IC	1.8V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
1JN2	-	81N18-P-AE3-2	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
1JN2G	-	81N18G-P-AE3-2	Vdet-IC	1.8V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
1JN2L	-	81N18L-P-AE3-2	Vdet-IC	1.8V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
1JN3	-	81N18-P-AE3-3	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
1JN3G	-	81N18G-P-AE3-3	Vdet-IC	1.8V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
1JN3L	-	81N18L-P-AE3-3	Vdet-IC	1.8V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
1JN5	-	81N18-P-AE3-5	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
1JN5G	-	81N18G-P-AE3-5	Vdet-IC	1.8V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
1JN5L	-	81N18L-P-AE3-5	Vdet-IC	1.8V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
1Jp	-	BC848A	Si-npn	GP, 30V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	PhH
1Js	-	BC848A	Si-npn	GP, 30V, 100mA, 330mW, B=110..220, >300MHz	SOT-23	16ta	-	3a	Sie
1Js	-	BC848AT	Si-npn	GP, 30V, 100mA, 200mW, B=140, >100MHz	SOT-416	16ta	-	3a	Inf
1Js	-	BC848AW	Si-npn	GP, 30V, 100mA, 250mW, B=110..220, 250MHz	SOT-323	16ta	-	3c	Inf
1Jt	-	BC848AW	Si-npn	GP, 30V, 100mA, 310mW, B=110..220, >300MHz	SOT-323	16ta	-	3a	Phi
1JW	-	BC848A	Si-npn	GP, 30V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	PhC
1JZ	-	BC848A	Si-npn	GP, 30V, 100mA, 330mW, B=110..220, >300MHz	SOT-23	16ta	-	3a	Zx
1K	-	BC848B	Si-npn	GP, 30V, 100mA, 310mW, B=200..450, >300MHz	SOT-23	16ta	-	3a	Di
1K	-	BC848BF	Si-npn	GP, 30V, 100mA, 200mW, B=200..450, 250MHz	SOT-490	18ta	-	3a	Phi
1K	-	BC848BT	Si-npn	GP, 30V, 100mA, 200mW, B=250, >100MHz	SOT-416	16ta	-	3a	Phi

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1K	-	BC848BW	Si-npn	GP, 30V, 100mA, 310mW, B=200..450, >300MHz	SOT-323	16ta	-	3a	Ons
1K	-	CH848BPT-Q	Si-npn	AF, Sw, 30V, 100mA, B=200..450, 300MHz	SOT-23	16ta	-	3a	Chm
1K	-	KST6428	Si-npn	GP, 60V, 200mA, 350mW, B=250..650, 100..700MHz	SOT-23	16ta	-	3a	Sam
1K	-	R3131N29EA3	Vdet-IC	2.9V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
-1K	-	PMST6428	Si-npn	GP, Hi-beta, 60V, 100mA, 200mW, B=250..650, 100..700MHz	SOT-323	16ta	-	3a	PhH
1K0	-	TC55RP172ECB	LVR-IC	LDO, 1.7V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
1K5	-	TC591702ECB	LVR-IC	LDO, -1.7V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
1K8	-	CMSZ5259B	Z-diode	39V±5%, 3.2mA, Zzt=80Ω, 275mW	SOT-323	16dc	-	3a	Cen
1KC2	-	81C19-P-AE3-2	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
1KC2G	-	81C19G-P-AE3-2	Vdet-IC	1.9V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
1KC2L	-	81C19L-P-AE3-2	Vdet-IC	1.9V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
1KC3	-	81C19-P-AE3-3	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
1KC3G	-	81C19G-P-AE3-3	Vdet-IC	1.9V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
1KC3L	-	81C19L-P-AE3-3	Vdet-IC	1.9V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
1KC5	-	81C19-P-AE3-5	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
1KC5G	-	81C19G-P-AE3-5	Vdet-IC	1.9V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
1KC5L	-	81C19L-P-AE3-5	Vdet-IC	1.9V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
1KM	-	MMBT6428	Si-npn	AF, 60V, 200mA, 225mW, B=250..650, <700MHz	SOT-23	16ta	-	3a	Mot
1KN2	-	81N19-P-AE3-2	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
1KN2G	-	81N19G-P-AE3-2	Vdet-IC	1.9V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
1KN2L	-	81N19L-P-AE3-2	Vdet-IC	1.9V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
1KN3	-	81N19-P-AE3-3	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
1KN3G	-	81N19G-P-AE3-3	Vdet-IC	1.9V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
1KN3L	-	81N19L-P-AE3-3	Vdet-IC	1.9V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
1KN5	-	81N19-P-AE3-5	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
1KN5G	-	81N19G-P-AE3-5	Vdet-IC	1.9V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
1KN5L	-	81N19L-P-AE3-5	Vdet-IC	1.9V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
1Kp	-	BC8488	Si-npn	GP, 30V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhH
1KP	-	2SK316-P	n-FET	V-cam, 10V, 50mA, 200mW, Idss=5..16mA, Up<3V	SOT-23	16fa	-	3a	Pan
1KQ	-	2SK316-Q	n-FET	V-cam, 10V, 50mA, 200mW, Idss=14..24mA, Up<3V	SOT-23	16fa	-	3a	Pan
1KR	-	BC848BR	Si-npn	GP, 30V, 100mA, 310mW, B=330, >300MHz	SOT-23	16ta	-	3a	Phi
1Ks	-	BC848B	Si-npn	GP, 30V, 100mA, 330mW, B=200..450, 250MHz	SOT-23	16ta	-	3a	Sie
1Ks	-	BC848BT	Si-npn	GP, 30V, 100mA, 200mW, B=250, >100MHz	SOT-416	16ta	-	3a	Inf
1Ks	-	BC848BW	Si-npn	GP, 30V, 100mA, 250mW, B=200..450, 250MHz	SOT-323	16ta	-	3c	Inf
1Kt	-	BC848BW	Si-npn	GP, 30V, 100mA, 310mW, B=200..450, >300MHz	SOT-323	16ta	-	3a	Phi
1KW	-	BC8488	Si-npn	GP, 30V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhC
1KZ	-	FMMT4400	Si-npn	AF, 60V, 600mA, 330mW, B=50..150, >200MHz	SOT-23	16ta	-	3a	Zx
1L	-	BC848C	Si-npn	GP, 30V, 100mA, 310mW, B=420..800, >300MHz	SOT-23	16ta	-	3a	Di
1L	-	BC848CF	Si-npn	GP, 30V, 100mA, 200mW, B=420..800, 150MHz	SOT-490	18ta	-	3a	Phi
1L	-	BC848CT	Si-npn	GP, 30V, 100mA, 200mW, B=480, >100MHz	SOT-416	16ta	-	3a	Phi
1L	-	BC848CW	Si-npn	GP, 30V, 100mA, 310mW, B=420..800, >300MHz	SOT-323	16ta	-	3a	Ons
1L	-	FMMT4401	Si-npn	AF, 60V, 600mA, 330mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Zx
1L	-	MMBT6429	Si-npn	AF, 55V, 200mA, 225mW, B=500..1250, <700MHz	SOT-23	16ta	-	3a	Mot
1L	-	R3131N44AC	Vdet-IC	4.4V±1.5%, +Reset ODO, 50ms	SOT-23	16vdc	VD6	3b	Ric
-1L	-	PMST6429	Si-npn	GP, Hi-beta, 55V, 100mA, 200mW, B=250..650, 100..700MHz	SOT-323	16ta	-	3a	PhH
1L0	-	TC55RP182ECB	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
1L5	-	TC591802ECB	LVR-IC	LDO, -1.8V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
1L8	-	CMSZ5260B	Z-diode	43V±5%, 3.0mA, Zzt=93Ω, 275mW	SOT-323	16dc	-	3a	Cen
1LM	-	2SC4103-M	Si-npn	GP, 30V, 30mA, 200mW, B=39..82, >110MHz	SOT-323	16ta	-	3a	Rhm
1LN	-	2SC4103-N	Si-npn	GP, 30V, 30mA, 200mW, B=56..120, >110MHz	SOT-323	16ta	-	3a	Rhm
1Lp	-	BC848C	Si-npn	GP, 30V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhH
1LP	-	2SC4103-P	Si-npn	GP, 30V, 30mA, 200mW, B=82..180, >110MHz	SOT-323	16ta	-	3a	Rhm
1LQ	-	2SC4103-Q	Si-npn	GP, 30V, 30mA, 200mW, B=120..270, >110MHz	SOT-323	16ta	-	3a	Rhm
1Ls	-	BC848C	Si-npn	GP, 30V, 100mA, 330mW, B=420..800, 250MHz	SOT-23	16ta	-	3a	Sie
1Ls	-	BC848CT	Si-npn	GP, 30V, 100mA, 200mW, B=480, >100MHz	SOT-416	16ta	-	3a	Inf
1Ls	-	BC848CW	Si-npn	GP, 30V, 100mA, 250mW, B=420..800, 250MHz	SOT-323	16ta	-	3c	Inf
1Lt	-	BC848CW	Si-npn	GP, 30V, 100mA, 310mW, B=420..800, >300MHz	SOT-323	16ta	-	3a	Phi
1LW	-	BC848C	Si-npn	GP, 30V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhC
1M	-	BC807-16	Si-pnp	GP, 50V, 500mA, 350mW, B=100..250, >80MHz	SOT-23	16ta	-	3f	Kec
1M	-	BC807A-16	Si-pnp	GP, 50V, 500mA, 350mW, B=100..250, >80MHz	SOT-23	16ta	-	3f	Kec
1M	-	BC846T	Si-npn	GP, 80V, 100mA, 150mW, B=110..450, >100MHz	SOT-416	16ta	-	3a	Phi
1M	-	BC848	Si-npn	GP, 30V, 100mA, 250mW, B=110..800, >100MHz	SOT-23	16ta	-	3a	Cdi
1M	-	BC848W	Si-npn	GP, 30V, 100mA, 200mW, B=110..800, >100MHz	SOT-323	16ta	-	3a	Phi
1M	-	FMMTA13	Si-npn-Darl	GP, 40V, 300mA, 330mW, B>10000	SOT-23	16ta	-	3a	Zx
1M	-	IMBT3903	Si-npn	GP, 60V, 200mA, 250mW, B=50..150, >300MHz	SOT-23	16ta	-	3a	Itt
1M	-	KST13	Si-npn-Darl	GP, 30V, 300mA, 350mW, B>5000, >125MHz	SOT-23	16ta	-	3a	Sam
1M	-	MMBTA13	Si-npn-Darl	GP, 30V, 300mA, 225mW, B>5000, >125MHz	SOT-23	16ta	-	3a	Ons
1M	-	R3131N44BC	Vdet-IC	4.4V±1.5%, +Reset ODO, 100ms	SOT-23	16vdc	VD6	3b	Ric
1M	-	SMBTA13	Si-npn-Darl	GP, 30V, 300mA, 300mW, B>5000, >125MHz	SOT-23	16ta	-	3c	Inf
1M0	-	TC55RP192ECB	LVR-IC	LDO, 1.9V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1M5	-	TC591902ECB	LVR-IC	LDO, -1.9V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
1M8	-	CMSZ5261B	Z-diode	47V±5%, 2.7mA, Zzt=105Ω, 275mW	SOT-323	16dc	-	3a	Cen
1MN	-	2SC4128-N	Si-npn	GP, 40V, 100mA, 200mW, B=56..120, >230MHz	SOT-323	16ta	-	3a	Pan
1Mp	-	BC848	Si-npn	GP, 30V, 100mA, 250mW, B=110..800, >100MHz	SOT-23	16ta	-	3a	PhH
1MP	-	2SC4128-P	Si-npn	GP, 40V, 100mA, 200mW, B=82..180, >230MHz	SOT-323	16ta	-	3a	Pan
1MP	-	2SJ84-P	p-FET	GP, 15V, 20mA, 200mW, Idss=0.5..3mA, Up<3V	SOT-23	16fa	-	3a	Pan
1MQ	-	2SJ84-Q	p-FET	GP, 15V, 20mA, 200mW, Idss=2..6mA, Up<3V	SOT-23	16fa	-	3a	Pan
1MR	-	2SJ84-R	p-FET	GP, 15V, 20mA, 200mW, Idss=0.5..12mA, Up<3V	SOT-23	16fa	-	3a	Pan
1MW	-	BC848	Si-npn	GP, 30V, 100mA, 250mW, B=110..800, >100MHz	SOT-23	16ta	-	3a	PhC
1N	-	BC807-25	Si-pnp	GP, 50V, 500mA, 350mW, B=160..400, >80MHz	SOT-23	16ta	-	3f	Kec
1N	-	BC807A-25	Si-pnp	GP, 50V, 500mA, 350mW, B=160..400, >80MHz	SOT-23	16ta	-	3f	Kec
1N	-	BC847T	Si-npn	GP, 50V, 100mA, 150mW, B=110..800, >100MHz	SOT-416	16ta	-	3a	Phi
1N	-	FMMTA14	Si-npn-Darl	GP, 40V, 300mA, 330mW, B>20000, >125MHz	SOT-23	16ta	-	3a	Zx
1N	-	IMBT3904	Si-npn	GP, 60V, 200mA, 250mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	Itt
1N	-	KST14	Si-npn-Darl	GP, 30V, 300mA, 350mW, B>10000, >125MHz	SOT-23	16ta	-	3a	Sam
1N	-	MMBT3904	Si-npn	GP, 60V, 100mA, 200mW, B= 100..300, >300MHz	SOT-23	16ta	-	3a	Vs
1N	-	MMBT3904T	Si-npn	GP, 60V, 200mA, 250mW, B=100..300, >300MHz	SOT-23	16ta	-	3d	Di
1N	-	MMBTA14	Si-npn-Darl	GP, 30V, 300mA, 300mW, B>10000, >125MHz	SOT-23	16ta	-	3g	Vs
1N	-	R3131N44DC	Vdet-IC	4.4V±1.5%, +Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Ric
1N	-	SMBTA14	Si-npn-Darl	GP, 30V, 300mA, 300mW, B>10000, >125MHz	SOT-23	16ta	-	3c	Inf
1N	-	TMPTA14	Si-npn-Darl	GP, 30V, 500mA, 350mW, B>10000, >125MHz	SOT-23	16ta	-	3a	All
1N‾	-	GMBTA14	Si-npn-Darl	GP, 30V, 500mA, 225mW, B=10k..20k, 125MHz	SOT-23	16ta	-	3a	Gtm
1N5	-	ZXT11N15DFTA	Si-npn	Lo-sat, Sw, 40V, 3A, 625mW, B=200..900, 145MHz	SOT-23	16ta	-	3a	Zx
1N5	-	ZXT11N15DFTC	Si-npn	Lo-sat, Sw, 40V, 3A, 625mW, B=200..900, 145MHz	SOT-23	16ta	-	3a	Zx
1N8	-	CMSZ5262B	Z-diode	51V±5%, 2.5mA, Zzt=125Ω, 275mW	SOT-323	16dc	-	3a	Cen
1N8	-	ZXTP749F	Si-pnp	Sw, Drv, 35V, 3A, 725mW, B=200..500	SOT-23	16ta	-	3a	Zx
1Np	-	BAP70-04W	PIN-diode	Dual RF, 50V, 100mA, 260mW, 0.6pF, 1.4Ω(100mA/100MHz)	SOT-323	16dl	-	3a	PhH
1Nt	-	BAP70-04W	PIN-diode	Dual RF, 50V, 100mA, 260mW, 0.6pF, 1.4Ω(100mA/100MHz)	SOT-323	16dl	-	3a	PhM
1NW	-	BAP70-04W	PIN-diode	Dual RF, 50V, 100mA, 260mW, 0.6pF, 1.4Ω(100mA/100MHz)	SOT-323	16dl	-	3a	PhC
1OP	-	2SK198-P	n-FET	AF, LN, 30V, ±20mA, 150mA, Idss=0.5..3mA, Up<1.5V	SOT-23	16fa	-	3a	Pan
1OP	-	2SK662-P	n-FET	Small Signal Amplifier, 30V, 20mA, 150mW, Idss=0.5..3mA, Up<0.8V	SOT-323	16fa	-	3a	Pan
1OQ	-	2SK198-Q	n-FET	AF, LN, 30V, ±20mA, 150mA, Idss=2..6mA, Up<1.5V	SOT-23	16fa	-	3a	Pan
1OQ	-	2SK662-Q	n-FET	Small Signal Amplifier, 30V, 20mA, 150mW, Idss=2..6mA, Up<0.8V	SOT-323	16fa	-	3a	Pan
1OR	-	2SK198-R	n-FET	AF, LN, 30V, ±20mA, 150mA, Idss=4..12mA, Up<1.5V	SOT-23	16fa	-	3a	Pan
1OR	-	2SK662-R	n-FET	Small Signal Amplifier, 30V, 20mA, 150mW, Idss=4..12mA, Up<0.8V	SOT-323	16fa	-	3a	Pan
1P	-	BC807-40	Si-pnp	GP, 50V, 500mA, 350mW, B=250..630, >80MHz	SOT-23	16ta	-	3f	Kec
1P	-	BC807A-40	Si-pnp	GP, 50V, 500mA, 350mW, B=250..630, >80MHz	SOT-23	16ta	-	3f	Kec
1P	-	FMMT2222A	Si-npn	GP, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Zx
1P	-	KST2222A	Si-npn	GP, 75V, 600mA, 350mW, B>75, >300MHz	SOT-23	16ta	-	3a	Sam
1P	-	MBT2222A	Si-npn	GP, 75V, 600mA, 250mW, B>40, 300MHz	SOT-23	16ta	-	3a	Tos
1P	-	MMBT2222A	Si-npn	GP, 75V, 800mA, 200mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Mot
1P	-	MMBT2222AT	Si-npn	GP, 75V, 800mA, 200mW, B=100..300, >200MHz	SOT-23	16ta	-	3d	Di
1P	-	MMBT2222AW	Si-npn	GP, 75V, 800mA, 200mW, B=100..300, >200MHz	SOT-323	16ta	-	3a	Mot
1P	-	R3131N44HC	Vdet-IC	4.4V±1.5%, +Reset ODO, 400ms	SOT-23	16vdc	VD6	3b	Ric
1P	-	SMBT2222A	Si-npn	GP, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3c	Inf
1P	-	TMPT2222A	Si-npn	GP, 75V, 0.8A, 200mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	All
1P	-	YTS2222A	Si-npn	GP, 75V, 0.8A, 200mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Tos
-1P	-	PMST2222A	Si-npn	Sw, 75V, 600mA, 200mW, B=120..300, >300MHz	SOT-323	16ta	-	3a	PhH
1P-	-	2SC2411KPT-R	Si-npn	Sw, 40V, 500mA, 225mW, B=180..390, 250MHz	SOT-23	16ta	-	3a	Chm
1P8	-	CMSZ5263B	Z-diode	56V±5%, 2.2mA, Zzt=150Ω, 275mW	SOT-323	16dc	-	3a	Cen
1Q	-	FMMT5088	Si-npn	GP, 35V, 50mA, 330mW, B=300..900, >50MHz	SOT-23	16ta	-	3a	Zx
1Q	-	KST5088	Si-npn	3GP, 5V, 50mA, 350mW, B=300..900, >50MHz	SOT-23	16ta	-	3a	Sam
1Q	-	MMBT5087	Si-pnp	GP, LN, 50V, 50mA, 225mW, B=250..800, >40MHz	SOT-23	16ta	-	3a	Mot
1Q	-	MMBT5088	Si-npn	GP, LN, 35V, 50mA, 225mW, B=300..900, >50MHz	SOT-23	16ta	-	3a	Mot
1Q	-	R3131N44AA	Vdet-IC	4.4V±1.5%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3b	Ric
1Q	-	TMPT5088	Si-npn	GP, 35V, 50mA, 350mW, B=300..900, >50MHz	SOT-23	16ta	-	3a	All
-1Q	-	PMST5088	Si-npn	GP, 35V, 100mA, 200mW, B=300..900, >100MHz	SOT-323	16ta	-	3a	PhH
1Q8	-	CMSZ5264B	Z-diode	60V±5%, 2.1mA, Zzt=170Ω, 275mW	SOT-323	16dc	-	3a	Cen
1QC	-	CMST5086	Si-pnp	GP, 50V, 50mA, 275mW, B=150..500, 40MHz	SOT-323	16ta	-	3a	Cen
1QC	-	CMST5088	Si-npn	GP, 35V, 50mA, 275mW, B=300..900, 50MHz	SOT-323	16ta	-	3a	Cen
1R	-	FMMT5089	Si-npn	AF, 30V, 50mA, 330mW, B=400..1200, >50MHz	SOT-23	16ta	-	3a	Zx
1R	-	KST5089	Si-npn	GP, 35V, 50mA, 350mW, B=400..1200, >50MHz	SOT-23	16ta	-	3a	Sam
1R	-	MMBT5089	Si-npn	GP, LN, 30V, 50mA, 225mW, B=400..1200, >50MHz	SOT-23	16ta	-	3a	Mot
1R	-	R3131N44BA	Vdet-IC	4.4V±1.5%, +Reset PPO, 100ms	SOT-23	16vdc	VD7	3b	Ric
1R	-	SRA2201E	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=4.7k/47k	SOT-523	16ta	-	3a	Auk
1R	-	SRA2201EF	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=4.7k/4.7k	SOT-523F	18ta	-	3a	Auk
1R	-	SRA2201U	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3a	Auk
1R	-	SRA2201UF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/4.7k	SOT-323F	18ta	-	3a	Auk
1R	-	TMPT5089	Si-npn	AF, 30V, 50mA, 330mW, B=400..1200, >50MHz	SOT-23	16ta	-	3a	All
-1R	-	PMST5089	Si-npn	GP, 30V, 100mA, 200mW, B=400..1200, >100MHz	SOT-323	16ta	-	3a	PhH



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1R8	-	CMSZ5265B	Z-diode	62V±5%, 2.0mA, Zzt=185Ω, 275mW	SOT-323	16dc	-	3a	Cen
1RC	-	CMST5087	Si-pnp	GP, 50V, 50mA, 275mW, B=250..800, 40MHz	SOT-323	16ta	-	3a	Cen
1RC	-	CMST5089	Si-npn	GP, 30V, 50mA, 275mW, B=400..1200, 50MHz	SOT-323	16ta	-	3a	Cen
1RQ	-	2SB1585-Q	Si-pnp	Lo-sat, 15V, 500mA, 130MHz, B=85..170	SOT-416	16ta	-	3a	Pan
1RR	-	2SB1585-R	Si-pnp	Lo-sat, 15V, 500mA, 130MHz, B=120..240	SOT-416	16ta	-	3a	Pan
1RR	-	2SB970-R	Si-pnp	AF, 15V, 500mA, 200mW, B=130..220, 130MHz	SC-59	16ta	-	3a	Pan
1RS	-	2SB1585-S	Si-pnp	Lo-sat, 15V, 500mA, 130MHz, B=170..340	SOT-416	16ta	-	3a	Pan
1RS	-	2SB970-S	Si-pnp	AF, 15V, 500mA, 200mW, B=180..350, 130MHz	SC-59	16ta	-	3a	Pan
1S	-	MMBT2369A	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120	SOT-23	16ta	-	3a	Nsc
1S	-	MSC3130	Si-npn	RF, 15V, 50mA, 200mW, B=75..400, >1.4GHz	SC-59	16ta	-	3a	Mot
1S	-	R3131N44DA	Vdet-IC	4.4V±1.5%, +Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Ric
-1S	-	PDTA123TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=2.2k	SOT-323	16ta	-	3a	NxH
1S8	-	CMSZ5266B	Z-diode	68V±5%, 1.8mA, Zzt=230Ω, 275mW	SOT-323	16dc	-	3a	Cen
1SP	-	2SC3130-P	Si-npn	HF-Amp/mix/osc, 15V, 50mA, 150mW, 1.9GHz, B=75..130	SC-59	16ta	-	3a	Pan
1SP	-	2SC3935-P	Si-npn	HF-Amp/osc, 15V, 50mA, 150mW, B=75..130, 1.9GHz	SOT-323	16ta	-	3a	Pan
1SP	-	2SC4809-P	Si-npn	HF Amp/osc/mix, 15V, 50mA, 125mW, B=75..130, 1.9GHz	SOT-416	16ta	-	3a	Pan
1SQ	-	2SC3130-Q	Si-npn	HF-Amp/mix/osc, 15V, 50mA, 150mW, 1.9GHz, B=110..220	SC-59	16ta	-	3a	Pan
1SQ	-	2SC3935-Q	Si-npn	HF-Amp/osc, 15V, 50mA, 150mW, B=110..220, 1.9GHz	SOT-323	16ta	-	3a	Pan
1SQ	-	2SC4809-Q	Si-npn	HF Amp/osc/mix, 15V, 50mA, 125mW, B=110..220, 1.9GHz	SOT-416	16ta	-	3a	Pan
1SR	-	2SC3130-R	Si-npn	HF-Amp/mix/osc, 15V, 50mA, 150mW, 1.9GHz, B=200..400	SC-59	16ta	-	3a	Pan
1SR	-	2SC4809-R	Si-npn	HF Amp/osc/mix, 15V, 50mA, 125mW, B=200..400, 1.9GHz	SOT-416	16ta	-	3a	Pan
1T	-	2SC3077	Si-npn	UHF-amp/mix, 30V, 20mA, 150mW, B=200..400, 1.1GHz	SC-59	16ta	-	3a	Pan
1T	-	2SC3933	Si-npn	UHF-amp/mix, 30V, 20mA, 150mW, B=40..200, 1.1GHz	SOT-323	16ta	-	3a	Pan
1T	-	R3131N44HA	Vdet-IC	4.4V±1.5%, +Reset PPO, 400ms	SOT-23	16vdc	VD7	3b	Ric
-1T	-	PDTC123TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=2.2k	SOT-323	16ta	-	3a	NxH
-1T	-	PDTD123TT	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1=2.2k	SOT-23	16ta	-	3a	NxH
1T1	-	MMST5101	Si-pnp	AF, 60V, 200mA, B=200..400, >125MHz	SOT-23	16ta	-	3a	Rhm
1T1	-	SST5101	Si-pnp	GP, 60V, 200mA, >125MHz	SOT-23	16ta	-	3a	Rhm
1T8	-	CMSZ5267B	Z-diode	75V±5%, 1.7mA, Zzt=270Ω, 275mW	SOT-323	16dc	-	3a	Cen
1TQ	-	2SC4773-Q	Si-npn	RF, Sw, 6V, 50mA, B=120..270, 800MHz	SOT-323	16ta	-	3a	Rhm
1TR	-	2SC4773-R	Si-npn	RF, Sw, 6V, 50mA, B=180..390, 800MHz	SOT-323	16ta	-	3a	Rhm
1TS	-	2SC4773-S	Si-npn	RF, Sw, 6V, 50mA, B=270..560, 800MHz	SOT-323	16ta	-	3a	Rhm
1U	-	2SC3110	Si-npn	UHF, 15V, 30mA, 200mW, 4.5GHz, B>40	SC-59A	16ta	-	3a	Pan
1U	-	2SC3934	Si-npn	HF, WB, LN, 15V, 50mA, 150mW, B>40, 4.5GHz	SOT-323	16ta	-	3a	Pan
1U	-	KST2484	Si-npn	GP, 60V, 50mA, 350mW, B>250	SOT-23	16ta	-	3a	Sam
1U	-	MMBT2484L	Si-npn	GP, 60V, 100mA, 300mW, B=250..800	SOT-23	16ta	-	3a	Ons
-1U	-	PDTB123TT	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1=2.2k	SOT-23	16ta	-	3a	NxH
1V	-	BF820	Si-npn	Vid, 300V, 50mA, 250mW, B>50, >60MHz	SOT-23	16ta	-	3a	Itt
1V	-	MMBT6427	Si-npn-Darl	AF, 40V, 1.2A, 350mW, B=10.00..100.00, >130MHz	SOT-23	16ta	-	3a	Nsc
1V	-	TMPT6427	Si-npn-Darl	GP, 40V, 500mA, 350mW, B=10k..100k, >130MHz	SOT-23	16ta	-	3a	All
1Vp	-	BF820	Si-npn	Vid, 300V, 50mA, 250mW, B>50, >60MHz	SOT-23	16ta	-	3a	PhH
1VR	-	2SD1149-R	Si-npn	Hi-beta, LN, 100V, 20mA, 200mW, 200MHz, B=400..800	SC-59	16ta	-	3a	Pan
1VR	-	2SD1824-R	Si-npn	AF-Amp, 100V, 50mA, 150mW, 90MHz, B=400..800	SOT-323	16ta	-	3a	Pan
1VS	-	2SD1149-S	Si-npn	Hi-beta, LN, 100V, 20mA, 200mW, 200MHz, B=600..1200	SC-59	16ta	-	3a	Pan
1VS	-	2SD1824-S	Si-npn	AF-Amp, 100V, 50mA, 150mW, 90MHz, B=600..1200	SOT-323	16ta	-	3a	Pan
1Vt	-	BF820	Si-npn	Vid, 300V, 50mA, 250mW, B>50, >60MHz	SOT-23	16ta	-	3a	PhM
1Vt	-	BF820W	Si-npn	Vid, 300V, 100mA, 200mW, B>50, >60MHz	SOT-323	16ta	-	3a	Phi
1VT	-	2SD1824-T	Si-npn	AF-Amp, 100V, 50mA, 150mW, 90MHz, B=1000..2000	SOT-323	16ta	-	3a	Pan
1VW	-	BF820	Si-npn	Vid, 300V, 50mA, 250mW, B>50, >60MHz	SOT-23	16ta	-	3a	PhC
1W	-	BF821	Si-pnp	Vid, 300V, 50mA, 250mW, B>50, >60MHz	SOT-23	16ta	-	3a	Cdi
1W	-	FMMT3903	Si-npn	GP, 60V, 200mA, 330mW, B=50..150, >250MHz	SOT-23	16ta	-	3a	Zx
1W-	-	BAP51-05W	PIN-diode	Dual, RF, 50V, 50mA, 240mW, 0.35pF, 2.5Ω(10mA/100MHz)	SOT-323	16dg	-	3a	Phi
1Wp	-	BF821	Si-pnp	Vid, 300V, 50mA, 250mW, B>50, >60MHz	SOT-23	16ta	-	3a	PhH
1Wt	-	BF821	Si-pnp	Vid, 300V, 50mA, 250mW, B>50, >60MHz	SOT-23	16ta	-	3a	PhM
1Wt	-	BF822W	Si-npn	Vid, 250V, 100mA, 200mW, B>50, >60MHz	SOT-323	16ta	-	3a	Phi
1WW	-	BF821	Si-pnp	Vid, 300V, 50mA, 250mW, B>50, >60MHz	SOT-23	16ta	-	3a	PhC
1X	-	2SC2845	Si-npn	UHF, LN, 25V, 70mA, 200mW, B=40..200, 4.5GHz	SC-59	16ta	-	3a	Pan
1X	-	BF822	Si-npn	Vid, 250V, 50mA, 250mW, B>50, >60MHz	SOT-23	16ta	-	3a	Itt
1X	-	MMBT930L	Si-npn	GP, 60V, 0.1A, 200mW, B= 100..300, >300MHz	SOT-23	16ta	-	3a	Mot
1XB	-	2SC4780-B	Si-npn	UHF, LN, 25V, 50mA, 150mW, B=40..100, 4.5GHz	SOT-323	16ta	-	3a	Pan
1XC	-	2SC4780-C	Si-npn	UHF, LN, 25V, 50mA, 150mW, B=80..200, 4.5GHz	SOT-323	16ta	-	3a	Pan
1Xp	-	BF822	Si-npn	Vid, 250V, 50mA, 250mW, B>50, >60MHz	SOT-23	16ta	-	3a	PhH
1Xt	-	BF822	Si-npn	Vid, 250V, 50mA, 250mW, B>50, >60MHz	SOT-23	16ta	-	3a	PhM
1XW	-	BF822	Si-npn	Vid, 250V, 50mA, 250mW, B>50, >60MHz	SOT-23	16ta	-	3a	PhC
1Y	-	BF823	Si-pnp	Vid, 250V, 50mA, 250mW, B>50, >60MHz	SOT-23	16ta	-	3a	Cdi
1Y	-	CMBT3903	Si-npn	GP, 60V, 200mA, 250mW, B=50..150, >300MHz	SOT-23	16ta	-	3a	Cdi
1Y	-	KST3903	Si-pnp	GP, 60V, 200mA, 350mW, B=50..150, >250MHz	SOT-23	16ta	-	3a	Sam
1Y	-	MMBT3903	Si-npn	GP, 60V, 200mA, 250mW, B=50..150, >300MHz	SOT-23	16ta	-	3a	Mot
1Y	-	YTS3903	Si-npn	GP, 60V, 200mA, 250mW, B=50..150, >300MHz	SOT-23	16ta	-	3a	Tos
1YD	-	L8550QLT1	Si-pnp	GP, 40V, 800mA, 225mW, B=150..300	SOT-23	16ta	-	3a	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1Yp	-	BF823	Si-pnp	Vid, 250V, 50mA, 250mW, B>50, >60MHz	SOT-23	16ta	-	3a	PhH
1Yt	-	BF823	Si-pnp	Vid, 250V, 50mA, 250mW, B>50, >60MHz	SOT-23	16ta	-	3a	PhM
1YW	-	BF823	Si-pnp	Vid, 250V, 50mA, 250mW, B>50, >60MHz	SOT-23	16ta	-	3a	PhC
1Z	-	BAS70-06	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16df	-	3a	Zx
1Z	-	MMBT6517	Si-npn	Vid, 350V, 250mA, 225mW, B=30..200, <200MHz	SOT-23	16ta	-	3a	Mot
1ZR	-	2SD1030-R	Si-npn	AF, 50V, 100mA, 200mW, 120MHz, B=400..800	SC-59	16ta	-	3a	Pan
1ZR	-	2SD1823-R	Si-npn	AF-Amp, 50V, 100mA, 150mW, 120MHz, B=400..800	SOT-323	16ta	-	3a	Pan
1ZR	-	2SD2345-R	Si-npn	AF, 50V, 100mA, 125mW, 120MHz, B=400..800	SOT-416	16ta	-	3a	Pan
1ZS	-	2SD1030-S	Si-npn	AF, 50V, 100mA, 200mW, 120MHz, B=600..1200	SC-59	16ta	-	3a	Pan
1ZS	-	2SD1823-S	Si-npn	AF-Amp, 50V, 100mA, 150mW, 120MHz, B=600..1200	SOT-323	16ta	-	3a	Pan
1ZS	-	2SD2345J-S	Si-npn	AF, 50V, 50mA, 125mW, 120MHz, B=600..1200	SC-89	18ta	-	3a	Pan
1ZS	-	2SD2345-S	Si-npn	AF, 50V, 100mA, 125mW, 120MHz, B=600..1200	SOT-416	16ta	-	3a	Pan
1ZT	-	2SD1030-T	Si-npn	AF, 50V, 100mA, 200mW, 120MHz, B=1000..2000	SC-59	16ta	-	3a	Pan
1ZT	-	2SD1823-T	Si-npn	AF-Amp, 50V, 100mA, 150mW, 120MHz, B=1000..2000	SOT-323	16ta	-	3a	Pan
1ZT	-	2SD2345J-T	Si-npn	AF, 50V, 50mA, 125mW, 120MHz, B=1000..2000	SC-89	18ta	-	3a	Pan
1ZT	-	2SD2345-T	Si-npn	AF, 50V, 100mA, 125mW, 120MHz, B=1000..2000	SOT-416	16ta	-	3a	Pan
2	-	AX6904GA	Vdet-IC	2.25V±1.5%, +Reset PPO	SC-70	16vda	VD7	3b	Axl
2	cr	ELM7517NEB	Vdet-IC	1.7V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
2	cs	ELM7517CEB	Vdet-IC	1.7V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
2.0	-	MAZ3020	Z-diode	1.88..2.12V, If=100mA, Zzt=100Ω, 200mW	SC-59	16dc	-	3a	Pan
2.2	-	MAZ3022	Z-diode	2.08..2.32V, If=100mA, Zzt=100Ω, 200mW	SC-59	16dc	-	3a	Pan
2.4	-	MAZ3024	Z-diode	2.28..2.6V, If=100mA, Zzt=100Ω, 200mW	SC-59	16dc	-	3a	Pan
2.4G	-	ZD2.4G-AE3	Z-diode	2.4V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
2.4L	-	ZD2.4L-AE3	Z-diode	2.4V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
2.5G	-	ZD2.5G-AE3	Z-diode	2.5V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
2.5L	-	ZD2.5L-AE3	Z-diode	2.5V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
2.7H	-	MAZ3027-H	Z-diode	2.5..2.9V, If=100mA, Zzt=110Ω, 200mW	SC-59	16dc	-	3a	Pan
2.7L	-	MAZ3027-L	Z-diode	2.5..2.9V, If=100mA, Zzt=110Ω, 200mW	SC-59	16dc	-	3a	Pan
2•0X	-	02CZ2.0-X	Z-diode	1.85..2.05V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
2•0Z	-	02CZ2.0-Z	Z-diode	1.95..2.15V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
2•2X	-	02CZ2.2-X	Z-diode	2.05..2.26V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
2•2Z	-	02CZ2.2-Z	Z-diode	2.16..2.38V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
2•4X	-	02CZ2.4-X	Z-diode	2.28..2.50V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
2•4Z	-	02CZ2.4-Z	Z-diode	2.4..2.60V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
2•7X	-	02CZ2.7-X	Z-diode	2.5..2.75V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
2•7Z	-	02CZ2.7-Z	Z-diode	2.65..2.9V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
20	-	1PS59SB20	Si-diode	Schottky, Sw, U-Fast, 40V, 500mA, Vf<0.55V(500mA), <5ns	SC-59	16dc	-	3a	Phi
20	-	AP8822C-60GA	Vdet-IC	6.0V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
20	-	AP8822C-60GT	Vdet-IC	6.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
20	-	AP8822C-60PA	Vdet-IC	6.0V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
20	-	AP8822C-60PT	Vdet-IC	6.0V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
20	-	BC849	Si-npn	GP, 30V, 100mA, 250mW, B=200..800, >100MHz	SOT-23	16ta	-	3a	Cdi
20	-	ELM9720NBB	Vdet-IC	2.0V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
20	-	ELM9820BB	LVR-IC	2.0V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
20	-	TZT20W	Z-diode	18.80..21.20V, Izt=5mA, Zzt=25Ω, 200mW	SOT-23	16dc	-	3a	Ttr
20	-	Z02W20V	Z-diode	18.80..21.20V, Izt=5mA, Zzt=25Ω, 200mW	SOT-23	16dc	-	3f	Kec
20-	-	HZM2.0NB	Z-diode	1.9..2.2V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
200	-	HZM20NB	Z-diode	18.86..21.08V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
200AC	-	BL8509-200ACRM	Vdet-IC	2.0V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
200AC	-	LC9009CB3TR200AC	Vdet-IC	2.0V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
200AN	-	BL8509-200ANRM	Vdet-IC	2.0V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
200AN	-	LC9009CB3TR200AN	Vdet-IC	2.0V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
200BC	-	BL8509-200BCRM	Vdet-IC	2.0V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
200BC	-	LC9009CB3TR200BC	Vdet-IC	2.0V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
200BN	-	BL8509-200BNRM	Vdet-IC	2.0V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
200BN	-	LC9009CB3TR200BN	Vdet-IC	2.0V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
200CC	-	BL8509-200CCRM	Vdet-IC	2.0V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
200CC	-	LC9009CB3TR200CC	Vdet-IC	2.0V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
200CN	-	BL8509-200CNRM	Vdet-IC	2.0V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
200CN	-	LC9009CB3TR200CN	Vdet-IC	2.0V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
200DC	-	BL8509-200DCRM	Vdet-IC	2.0V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
200DC	-	LC9009CB3TR200DC	Vdet-IC	2.0V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
200DN	-	BL8509-200DNRM	Vdet-IC	2.0V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
200DN	-	LC9009CB3TR200DN	Vdet-IC	2.0V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
200EC	-	BL8509-200ECRM	Vdet-IC	2.0V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
200EC	-	LC9009CB3TR200EC	Vdet-IC	2.0V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
200EN	-	BL8509-200ENRM	Vdet-IC	2.0V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
200EN	-	LC9009CB3TR200EN	Vdet-IC	2.0V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
200FC	-	BL8509-200FCRM	Vdet-IC	2.0V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
200FC	-	LC9009CB3TR200FC	Vdet-IC	2.0V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
200FN	-	BL8509-200FNRM	Vdet-IC	2.0V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
200FN	-	LC9009CB3TR200FN	Vdet-IC	2.0V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
200GC	-	BL8509-200GCRM	Vdet-IC	2.0V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
200GC	-	LC9009CB3TR200GC	Vdet-IC	2.0V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
200GN	-	BL8509-200GNRM	Vdet-IC	2.0V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
200GN	-	LC9009CB3TR200GN	Vdet-IC	2.0V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
201	-	PZM20NB1	Z-diode	20V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
201	ca	HZM20NB1	Z-diode	18.86..19.7V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
202	-	PZM20NB2	Z-diode	20V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
202	ca	HZM20NB2	Z-diode	19.52..20.39V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
20-2	-	UTC8120-2	Vdet-IC	2.0V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
203	-	PZM20NB3	Z-diode	20V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
203	ca	HZM20NB3	Z-diode	20.21..21.08V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
20-3	-	UTC8120-3	Vdet-IC	2.0V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
20-5	-	UTC8120-5	Vdet-IC	2.0V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
20A	-	AAT60020A-S2	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
20A	-	MAZ3200WA	Z-diode	Dual, 18.8..21.2V, If=100mA, Zzt=55Ω, 200mW	SC-59	16df	-	3a	Pan
20A	-	MMBZ20VA	TVS	Dual, Vrwm=17V, Vbr=19.0..21.0V, 1.4A, 40W(1ms)	SOT-23	16dg	-	3a	Wtr
20B	-	AAT60020B-S2	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
20C	-	AAT60020C-S2	Vdet-IC	2.0V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
20D	-	AAT60020D-S2	Vdet-IC	2.0V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
20G	-	ZD20G-AE3	Z-diode	20V±5%, Zzt=85Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
20H	-	BZX84C20-V	Z-diode	19.48..20.46V, Izt=5mA, Zzt=25Ω, 300mW	SOT-23	16dc	-	3f	Kec
20H	-	MAZ3200-H	Z-diode	18.8..21.2V, If=100mA, Zzt=55Ω, 200mW	SC-59	16dc	-	3a	Pan
20L	-	MAZ3200-L	Z-diode	18.8..21.2V, If=100mA, Zzt=55Ω, 200mW	SC-59	16dc	-	3a	Pan
20L	-	ZD20L-AE3	Z-diode	20V±5%, Zzt=85Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
20M	-	MAZ3200-M	Z-diode	18.8..21.2V, If=100mA, Zzt=55Ω, 200mW	SC-59	16dc	-	3a	Pan
20T	-	TK71520AS	LVR-IC	LDO, 2.0V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
20V	-	CHPZ20VPT	Z-diode	Dual, 19.0..21.0V, Izt=5mA, Zzt=55Ω, 350mW	SOT-23	16df	-	3a	Chm
20V	-	PZM20NB	Z-diode	20V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
20X	-	02CZ20-X	Z-diode	18.8..19.78V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
20X	-	TZT20XW	Z-diode	18.80.. 19.78V, Izt=5mA, Zzt=25Ω, 200mW	SOT-23	16dc	-	3a	Ttr
20X	-	Z02W20VX	Z-diode	18.80..19.78V, Izt=5mA, Zzt=25Ω, 200mW	SOT-23	16dc	-	3f	Kec
20Y	-	02CZ20-Y	Z-diode	19.48..20.46V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
20Y	-	TZT20YW	Z-diode	19.48..20.46V, Izt=5mA, Zzt=25Ω, 200mW	SOT-23	16dc	-	3a	Ttr
20Y	-	Z02W20VY	Z-diode	19.48..20.46V, Izt=5mA, Zzt=25Ω, 200mW	SOT-23	16dc	-	3f	Kec
20Z	-	02CZ20-Z	Z-diode	20.16..21.2V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
20Z	-	CZ1W20	Z-diode	20V±5%, Izt=12.5mA, 600mW	SOT-23	16dc	-	3a	Cdi
20Z	-	TZT20ZW	Z-diode	20.16..21.20V, Izt=5mA, Zzt=25Ω, 200mW	SOT-23	16dc	-	3a	Ttr
20Z	-	Z02W20VZ	Z-diode	20.16..21.20V, Izt=5mA, Zzt=25Ω, 200mW	SOT-23	16dc	-	3f	Kec
21	-	1PS59SB21	Si-diode	Schottky, Sw, U-Fast, 40V, 200mA, Vf<0.55V(200mA), <5ns	SC-59	16dc	-	3a	Phi
21	-	CHP222MPT	Si-diode	Dual, Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	SOT-723	18df	-	3a	Chm
21	-	ELM9721NBB	Vdet-IC	2.1V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
21	-	ELM9821BB	LVR-IC	2.1V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
210	-	KTY82/210	Tdet-IC	Sensor, Rs=1980..2020Ω(25°C, 1mA)	SOT-23	16ag	-	3a	Nxp
210AC	-	BL8509-210ACRM	Vdet-IC	2.1V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
210AC	-	LC9009CB3TR210AC	Vdet-IC	2.1V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
210AN	-	BL8509-210ANRM	Vdet-IC	2.1V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
210AN	-	LC9009CB3TR210AN	Vdet-IC	2.1V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
210BC	-	BL8509-210BCRM	Vdet-IC	2.1V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
210BC	-	LC9009CB3TR210BC	Vdet-IC	2.1V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
210BN	-	BL8509-210BNRM	Vdet-IC	2.1V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
210BN	-	LC9009CB3TR210BN	Vdet-IC	2.1V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
210CC	-	BL8509-210CCRM	Vdet-IC	2.1V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
210CC	-	LC9009CB3TR210CC	Vdet-IC	2.1V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
210CN	-	BL8509-210CNRM	Vdet-IC	2.1V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
210CN	-	LC9009CB3TR210CN	Vdet-IC	2.1V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
210DC	-	BL8509-210DCRM	Vdet-IC	2.1V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
210DC	-	LC9009CB3TR210DC	Vdet-IC	2.1V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
210DN	-	BL8509-210DNRM	Vdet-IC	2.1V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
210DN	-	LC9009CB3TR210DN	Vdet-IC	2.1V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
210EC	-	BL8509-210ECRM	Vdet-IC	2.1V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
210EC	-	LC9009CB3TR210EC	Vdet-IC	2.1V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
210EN	-	BL8509-210ENRM	Vdet-IC	2.1V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
210EN	-	LC9009CB3TR210EN	Vdet-IC	2.1V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
210FC	-	BL8509-210FCRM	Vdet-IC	2.1V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
210FC	-	LC9009CB3TR210FC	Vdet-IC	2.1V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
210FN	-	BL8509-210FNRM	Vdet-IC	2.1V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
210FN	-	LC9009CB3TR210FN	Vdet-IC	2.1V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
210GC	-	BL8509-210GCRM	Vdet-IC	2.1V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
210GC	-	LC9009CB3TR210GC	Vdet-IC	2.1V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
210GN	-	BL8509-210GNRM	Vdet-IC	2.1V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
210GN	-	LC9009CB3TR210GN	Vdet-IC	2.1V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
21-2	-	UTC8121-2	Vdet-IC	2.1V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
21-3	-	UTC8121-3	Vdet-IC	2.1V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
21-5	-	UTC8121-5	Vdet-IC	2.1V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
21A	-	AAT60021A-S2	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
21A	-	APR3021-15A	Vdet-IC	1.5V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Anp
21A	-	BAS21A	Si-diode	Dual, Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16df	-	3a	Pjt
21B	-	AAT60021B-S2	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
21B	-	APR3021-17A	Vdet-IC	1.75V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Anp
21B	-	MMBZ5221BPT	Z-diode	2.280..2.520V, Izt=5mA, Zzt=100Ω, 225mW	SOT-23	16dc	-	3a	Chm
21C	-	AAT60021C-S2	Vdet-IC	2.1V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
21C	-	APR3021-23A	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Anp
21C	-	BAS21C	Si-diode	Dual, Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dg	-	3a	Pjt
21D	-	AAT60021D-S2	Vdet-IC	2.1V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
21D	-	APR3021-26A	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Anp
21E	-	APR3021-29A	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Anp
21F	-	APR3021-30A	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Anp
21G	-	APR3021-39A	Vdet-IC	3.9V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Anp
21H	-	APR3021-43A	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Anp
21J	-	APR3021-46A	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Anp
21N	-	DMN2170U	n-MOSFET	Sw, 20V, 2.3A, 600mW, 50mΩ(3A), 62pF	SOT-23	16fh	-	3c	Di
21N	-	STM1061N21W	Vdet-IC	2.1V±2%, -Reset ODO	SOT-323	16vda	VD6	3d	Ste
21N	-	STM1061N21WX	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Ste
21S	-	BAS21S	Si-diode	Dual, Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dl	-	3a	Pjt
21S	-	MMBZ5221SPT	Z-diode	2.352..2.448V, Izt=5mA, Zzt=100Ω, 225mW	SOT-23	16dc	-	3a	Chm
21S	-	MMCZ5221SPT	Z-diode	2.352..2.448V, Izt=5mA, Zzt=100Ω, 225mW	SOT-346	16dc	-	3a	Chm
21T	-	TK71521AS	LVR-IC	LDO, 2.1V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
22	-	CHN222MPT	Si-diode	Dual, Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	SOT-723	18dg	-	3a	Chm
22	-	DTC123EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2k2/2k2	SOT-416	16ta	-	3a	Rhm
22	-	DTC123EKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/2k2	SOT-346	16ta	-	3a	Rhm
22	-	DTC123EM	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2k2/2k2	VMT3	18ta	-	3a	Rhm
22	-	DTC123EUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/2k2	UMT3	16ta	-	3a	Rhm
22	-	ELM9722NBB	Vdet-IC	2.2V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
22	-	ELM9822BB	LVR-IC	2.2V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
22	-	TZT22W	Z-diode	20.80..23.30V, Izt=5mA, Zzt=30Ω, 200mW	SOT-23	16dc	-	3a	Ttr
22	-	Z02W22V	Z-diode	20.80..23.30V, Izt=5mA, Zzt=30Ω, 200mW	SOT-23	16dc	-	3f	Kec
22-	-	HZM2.2NB	Z-diode	2.1..2.4V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
220	-	HZM22NB	Z-diode	20.88..23.17V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
220	-	KTY82/220	Tdet-IC	Sensor, Rs=1960..2040Ω(25°C, 1mA)	SOT-23	16ag	-	3a	Nxp
220AC	-	BL8509-220ACRM	Vdet-IC	2.2V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
220AC	-	LC9009CB3TR220AC	Vdet-IC	2.2V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
220AN	-	BL8509-220ANRM	Vdet-IC	2.2V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
220AN	-	LC9009CB3TR220AN	Vdet-IC	2.2V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
220BC	-	BL8509-220BCRM	Vdet-IC	2.2V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
220BC	-	LC9009CB3TR220BC	Vdet-IC	2.2V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
220BN	-	BL8509-220BNRM	Vdet-IC	2.2V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
220BN	-	LC9009CB3TR220BN	Vdet-IC	2.2V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
220CC	-	BL8509-220CCRM	Vdet-IC	2.2V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
220CC	-	LC9009CB3TR220CC	Vdet-IC	2.2V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
220CN	-	BL8509-220CNRM	Vdet-IC	2.2V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
220CN	-	LC9009CB3TR220CN	Vdet-IC	2.2V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
220DC	-	BL8509-220DCRM	Vdet-IC	2.2V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
220DC	-	LC9009CB3TR220DC	Vdet-IC	2.2V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
220DN	-	BL8509-220DNRM	Vdet-IC	2.2V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
220DN	-	LC9009CB3TR220DN	Vdet-IC	2.2V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
220EC	-	BL8509-220ECRM	Vdet-IC	2.2V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
220EC	-	LC9009CB3TR220EC	Vdet-IC	2.2V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
220EN	-	BL8509-220ENRM	Vdet-IC	2.2V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
220EN	-	LC9009CB3TR220EN	Vdet-IC	2.2V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
220FC	-	BL8509-220FCRM	Vdet-IC	2.2V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
220FC	-	LC9009CB3TR220FC	Vdet-IC	2.2V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
220FN	-	BL8509-220FNRM	Vdet-IC	2.2V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
220FN	-	LC9009CB3TR220FN	Vdet-IC	2.2V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
220GC	-	BL8509-220GCRM	Vdet-IC	2.2V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
220GC	-	LC9009CB3TR220GC	Vdet-IC	2.2V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
220GN	-	BL8509-220GNRM	Vdet-IC	2.2V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
220GN	-	LC9009CB3TR220GN	Vdet-IC	2.2V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
221	-	KTY82/221	Tdet-IC	Sensor, Rs=1960..2000Ω(25°C, 1mA)	SOT-23	16ag	-	3a	Nxp



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
221	-	PZM22NB1	Z-diode	22V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
221	ca	HZM22NB1	Z-diode	20.88..21.77V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
222	-	KTY82/222	Tdet-IC	Sensor, Rs=2000..2040Ω(25°C, 1mA)	SOT-23	16ag	-	3a	Nxp
222	-	PZM22NB2	Z-diode	22V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
222	ca	HZM22NB2	Z-diode	21.54..22.47V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
22-2	-	UTC8122-2	Vdet-IC	2.2V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
223	-	PZM22NB3	Z-diode	22V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
223	ca	HZM22NB3	Z-diode	22.23..23.17V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
22-3	-	UTC8122-3	Vdet-IC	2.2V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
22-5	-	UTC8122-5	Vdet-IC	2.2V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
22A	-	AAT60022A-S2	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
22A	-	APR3022-15A	Vdet-IC	1.5V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Anp
22B	-	AAT60022B-S2	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
22B	-	APR3022-17A	Vdet-IC	1.75V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Anp
22B	-	MMBZ5222BPT	Z-diode	2.375..2.625V, Izt=5mA, Zzt=100Ω, 225mW	SOT-23	16dc	-	3a	Chm
22C	-	AAT60022C-S2	Vdet-IC	2.2V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
22C	-	APR3022-23A	Vdet-IC	2.32V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Anp
22D	-	AAT60022D-S2	Vdet-IC	2.2V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
22D	-	APR3022-26A	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Anp
22E	-	APR3022-29A	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Anp
22F	-	APR3022-30A	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Anp
22G	-	APR3022-39A	Vdet-IC	3.9V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Anp
22G	-	ZD22G-AE3	Z-diode	22V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
22H	-	APR3022-43A	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Anp
22H	-	BZX84C22-V	Z-diode	21.48..22.56V, Izt=5mA, Zzt=30Ω, 300mW	SOT-23	16dc	-	3f	Kec
22H	-	MAZ3220-H	Z-diode	20.8..23.3V, If=100mA, Zzt=55Ω, 200mW	SC-59	16dc	-	3a	Pan
22J	-	APR3022-46A	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Anp
22L	-	MAZ3220-L	Z-diode	20.8..23.3V, If=100mA, Zzt=55Ω, 200mW	SC-59	16dc	-	3a	Pan
22L	-	ZD22L-AE3	Z-diode	22V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
22M	-	MAZ3220-M	Z-diode	20.8..23.3V, If=100mA, Zzt=55Ω, 200mW	SC-59	16dc	-	3a	Pan
22N	-	DMN2230U	n-MOSFET	Sw, 20V, 2A, 600mW, 81mΩ(2.5A), 8/19.6ns	SOT-23	16fh	-	3c	Di
22N	-	STM1061N22W	Vdet-IC	2.2V±2%, -Reset ODO	SOT-323	16vda	VD6	3d	Ste
22N	-	STM1061N22WX	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Ste
22S	-	MMBZ5222SPT	Z-diode	2.450..2.550V, Izt=5mA, Zzt=100Ω, 225mW	SOT-23	16dc	-	3a	Chm
22S	-	MMCZ5222SPT	Z-diode	2.450..2.550V, Izt=5mA, Zzt=100Ω, 225mW	SOT-346	16dc	-	3a	Chm
22T	-	TK71522AS	LVR-IC	LDO, 2.2V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
22V	-	CHPZ22VPT	Z-diode	Dual, 20.9..23.1V, Izt=5mA, Zzt=55Ω, 350mW	SOT-23	16df	-	3a	Chm
22V	-	PZM22NB	Z-diode	22V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
22X	-	02CZ22-X	Z-diode	20.80..21.88V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
22X	-	TZT22XW	Z-diode	20.80..21.88V, Izt=5mA, Zzt=30Ω, 200mW	SOT-23	16dc	-	3a	Ttr
22X	-	Z02W22VX	Z-diode	20.80..21.88V, Izt=5mA, Zzt=30Ω, 200mW	SOT-23	16dc	-	3f	Kec
22Y	-	02CZ22-Y	Z-diode	21.48..22.56V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
22Y	-	TZT22YW	Z-diode	21.48..22.56V, Izt=5mA, Zzt=30Ω, 200mW	SOT-23	16dc	-	3a	Ttr
22Y	-	Z02W22VY	Z-diode	21.48..22.56V, Izt=5mA, Zzt=30Ω, 200mW	SOT-23	16dc	-	3f	Kec
22Z	-	02CZ22-Z	Z-diode	22.16..23.3V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
22Z	-	CZ1W22	Z-diode	22V±5%, Izt=11.5mA, 600mW	SOT-23	16dc	-	3a	Cdi
22Z	-	TZT22ZW	Z-diode	22.16..23.30V, Izt=5mA, Zzt=30Ω, 200mW	SOT-23	16dc	-	3a	Ttr
22Z	-	Z02W22VZ	Z-diode	22.16..23.30V, Izt=5mA, Zzt=30Ω, 200mW	SOT-23	16dc	-	3f	Kec
23	-	CH221MSPT	Si-diode	Dual, Sw, 20V, 100mA, Vf<1V(10mA), 4ns	SOT-723	18dl	-	3a	Chm
23	-	DTC143EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/4k7	SOT-416	16ta	-	3a	Rhm
23	-	DTC143EKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/4k7	SOT-346	16ta	-	3a	Rhm
23	-	DTC143EM	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/4k7	VMT3	18ta	-	3a	Rhm
23	-	DTC143EUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/4k7	UMT3	16ta	-	3a	Rhm
23	-	ELM9723NBB	Vdet-IC	2.3V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
23	-	ELM9823BB	LVR-IC	2.3V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
23	-	MMBT3646	Si-npn	GP, 40V, 200mA, 350mW, B=30..120, >350MHz	SOT-23	16ta	-	3a	Nsc
23	-	PDTA114TK	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=10k	SOT-346	16ta	-	3a	Nxp
-23	-	PDTA114TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=10k	SOT-323	16ta	-	3a	NxH
2302	-	FMS2302	n-MOSFET	Amp, 20V, 2.6A, 1.3W, <85 mΩ(3.6A), 5.2/15ns	SOT-23	16fh	-	3b	Frm
230AC	-	BL8509-230ACRM	Vdet-IC	2.3V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
230AC	-	LC9009CB3TR230AC	Vdet-IC	2.3V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
230AN	-	BL8509-230ANRM	Vdet-IC	2.3V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
230AN	-	LC9009CB3TR230AN	Vdet-IC	2.3V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
230BC	-	BL8509-230BCRM	Vdet-IC	2.3V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
230BC	-	LC9009CB3TR230BC	Vdet-IC	2.3V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
230BN	-	BL8509-230BNRM	Vdet-IC	2.3V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
230BN	-	LC9009CB3TR230BN	Vdet-IC	2.3V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
230CC	-	BL8509-230CCRM	Vdet-IC	2.3V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
230CC	-	LC9009CB3TR230CC	Vdet-IC	2.3V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
230CN	-	BL8509-230CNRM	Vdet-IC	2.3V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
230CN	-	LC9009CB3TR230CN	Vdet-IC	2.3V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
230DC	-	BL8509-230DCRM	Vdet-IC	2.3V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
230DC	-	LC9009CB3TR230DC	Vdet-IC	2.3V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
230DN	-	BL8509-230DNRM	Vdet-IC	2.3V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
230DN	-	LC9009CB3TR230DN	Vdet-IC	2.3V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
230EC	-	BL8509-230ECRM	Vdet-IC	2.3V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
230EC	-	LC9009CB3TR230EC	Vdet-IC	2.3V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
230EN	-	BL8509-230ENRM	Vdet-IC	2.3V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
230EN	-	LC9009CB3TR230EN	Vdet-IC	2.3V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
230FC	-	BL8509-230FCRM	Vdet-IC	2.3V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
230FC	-	LC9009CB3TR230FC	Vdet-IC	2.3V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
230FN	-	BL8509-230FNRM	Vdet-IC	2.3V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
230FN	-	LC9009CB3TR230FN	Vdet-IC	2.3V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
230GC	-	BL8509-230GCRM	Vdet-IC	2.3V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
230GC	-	LC9009CB3TR230GC	Vdet-IC	2.3V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
230GN	-	BL8509-230GNRM	Vdet-IC	2.3V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
230GN	-	LC9009CB3TR230GN	Vdet-IC	2.3V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
23-2	-	UTC8123-2	Vdet-IC	2.3V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
23-3	-	UTC8123-3	Vdet-IC	2.3V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
23-5	-	UTC8123-5	Vdet-IC	2.3V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
23A	-	AAT60023A-S2	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
23A	-	APR3023-15A	Vdet-IC	1.5V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3b	Anp
23B	-	AAT60023B-S2	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
23B	-	APR3023-17A	Vdet-IC	1.75V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3b	Anp
23B	-	MMBZ5223BPT	Z-diode	2.565..2.835V, Izt=5mA, Zzt=100Ω, 225mW	SOT-23	16dc	-	3a	Chm
23C	-	AAT60023C-S2	Vdet-IC	2.3V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
23C	-	APR3023-23A	Vdet-IC	2.32V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3b	Anp
23D	-	AAT60023D-S2	Vdet-IC	2.3V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
23D	-	APR3023-26A	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3b	Anp
23E	-	APR3023-29A	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3b	Anp
23F	-	APR3023-30A	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3b	Anp
23G	-	APR3023-39A	Vdet-IC	3.9V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3b	Anp
23H	-	APR3023-43A	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3b	Anp
23J	-	APR3023-46A	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3b	Anp
23N	-	STM1061N23W	Vdet-IC	2.3V±2%, -Reset ODO	SOT-323	16vda	VD6	3d	Ste
23N	-	STM1061N23WX	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Ste
23S	-	MMBZ5223SPT	Z-diode	2.646..2.754V, Izt=5mA, Zzt=100Ω, 225mW	SOT-23	16dc	-	3a	Chm
23S	-	MMCZ5223SPT	Z-diode	2.646..2.754V, Izt=5mA, Zzt=100Ω, 225mW	SOT-346	16dc	-	3a	Chm
23T	-	TK71523AS	LVR-IC	LDO, 2.3V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
24	-	2SC5006-FB	Si-npn	VHF/UHF, 20V, 100mA, 125mW, 4.5GHz, B=80..160	SOT-323	16ta	-	3a	Nec
24	-	DTC114ECA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	Rhm
24	-	DTC114EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=10k/10k	SOT-416	16ta	-	3a	Rhm
24	-	DTC114EKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	SOT-346	16ta	-	3a	Rhm
24	-	DTC114EM	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=10k/10k	VMT3	18ta	-	3a	Rhm
24	-	DTC114EUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	UMT3	16ta	-	3a	Rhm
24	-	ELM9724NBB	Vdet-IC	2.4V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
24	-	ELM9824BB	LVR-IC	2.4V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
24	-	MSCT24	TVS	Vrwm=24V, 300W (8/20µs)	SOT-23	16dh	-	3a	Msp
24	-	NE85619-FB	Si-npn	VHF/UHF, 20V, 100mA, 125mW, 4.5GHz, B=80..160	SOT-323	16ta	-	3a	Cel
24	-	PDTA124TEF	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=22k	SOT-490	18ta	-	3a	Nxp
24	-	PDTC114TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1=10k	SOT-416	16ta	-	3a	Nxp
24	-	PDTC114TK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=10k	SC-59	16ta	-	3a	Nxp
24	-	TZT24W	Z-diode	22.80..25.60V, Izt=5mA, Zzt=40Ω, 200mW	SOT-23	16dc	-	3a	Ttr
24	-	Z02W24V	Z-diode	22.80..25.60V, Izt=5mA, Zzt=40Ω, 200mW	SOT-23	16dc	-	3f	Kec
-24	-	PDTC114TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=10k	SOT-323	16ta	-	3a	NxH
24-	-	HZM2.4NB	Z-diode	2.1..2.4V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
240	-	HZM24NB	Z-diode	22.93..25.57V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
240AC	-	BL8509-240ACRM	Vdet-IC	2.4V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
240AC	-	LC9009CB3TR240AC	Vdet-IC	2.4V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
240AN	-	BL8509-240ANRM	Vdet-IC	2.4V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
240AN	-	LC9009CB3TR240AN	Vdet-IC	2.4V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
240BC	-	BL8509-240BCRM	Vdet-IC	2.4V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
240BC	-	LC9009CB3TR240BC	Vdet-IC	2.4V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
240BN	-	BL8509-240BNRM	Vdet-IC	2.4V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
240BN	-	LC9009CB3TR240BN	Vdet-IC	2.4V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
240CC	-	BL8509-240CCRM	Vdet-IC	2.4V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
240CC	-	LC9009CB3TR240CC	Vdet-IC	2.4V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
240CN	-	BL8509-240CNRM	Vdet-IC	2.4V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
240CN	-	LC9009CB3TR240CN	Vdet-IC	2.4V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
240DC	-	BL8509-240DCRM	Vdet-IC	2.4V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
240DC	-	LC9009CB3TR240DC	Vdet-IC	2.4V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
240DN	-	BL8509-240DNRM	Vdet-IC	2.4V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
240DN	-	LC9009CB3TR240DN	Vdet-IC	2.4V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
240EC	-	BL8509-240ECRM	Vdet-IC	2.4V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
240EC	-	LC9009CB3TR240EC	Vdet-IC	2.4V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
240EN	-	BL8509-240ENRM	Vdet-IC	2.4V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
240EN	-	LC9009CB3TR240EN	Vdet-IC	2.4V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
240FC	-	BL8509-240FCRM	Vdet-IC	2.4V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
240FC	-	LC9009CB3TR240FC	Vdet-IC	2.4V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
240FN	-	BL8509-240FNRM	Vdet-IC	2.4V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
240FN	-	LC9009CB3TR240FN	Vdet-IC	2.4V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
240GC	-	BL8509-240GCRM	Vdet-IC	2.4V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
240GC	-	LC9009CB3TR240GC	Vdet-IC	2.4V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
240GN	-	BL8509-240GNRM	Vdet-IC	2.4V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
240GN	-	LC9009CB3TR240GN	Vdet-IC	2.4V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
241	-	2SC2411K	Si-npn	Sw, 40V, 500mA, 225mW, B=82..180, 250MHz	SOT-23	16ta	-	3a	Pjt
241	-	PZM24NB	Z-diode	24V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
241	-	PZM24NB1	Z-diode	24V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
241	ca	HZM24NB1	Z-diode	22.93..23.96V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
242	-	PZM24NB	Z-diode	24V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
242	-	PZM24NB2	Z-diode	24V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
242	ca	HZM24NB2	Z-diode	23.72..24.78V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
24-2	-	UTC8124-2	Vdet-IC	2.4V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
243	-	PZM20NB	Z-diode	24V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
243	-	PZM24NB3	Z-diode	24V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
243	ca	HZM24NB3	Z-diode	24.54..25.57V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
24-3	-	UTC8124-3	Vdet-IC	2.4V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
24-5	-	UTC8124-5	Vdet-IC	2.4V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
24A	-	AAT60024A-S2	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
24B	-	AAT60024B-S2	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
24B	-	MMBZ5224BPT	Z-diode	2.660..2.940V, Izt=5mA, Zzt=100Ω, 225mW	SOT-23	16dc	-	3a	Chm
24C	-	AAT60024C-S2	Vdet-IC	2.4V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
24C	-	MSCT24C	TVS	Dual, Vrwm=24V, 300W (8/20µs), Bidir.	SOT-23	16dp	-	3a	Msp
24C	-	TVS2324PT	TVS	Dual, Vbr=26.7V, Vrwm=24V, 1A, 300W(1ms)	SOT-23	16df	-	3a	Chm
24D	-	AAT60024D-S2	Vdet-IC	2.4V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
24G	-	ZD24G-AE3	Z-diode	24V±5%, Zzt=120Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
24H	-	BZX84C24-V	Z-diode	23.61..24.92V, Izt=5mA, Zzt=40Ω, 300mW	SOT-23	16dc	-	3f	Kec
24H	-	MAZ3240-H	Z-diode	22.8..25.6V, If=100mA, Zzt=70Ω, 200mW	SC-59	16dc	-	3a	Pan
24K	-	XC6202P182MR	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
24L	-	MAZ3240-L	Z-diode	22.8..25.6V, If=100mA, Zzt=70Ω, 200mW	SC-59	16dc	-	3a	Pan
24L	-	XC6202P192MR	LVR-IC	LDO, 1.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
24L	-	ZD24L-AE3	Z-diode	24V±5%, Zzt=120Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
24M	-	MAZ3240-M	Z-diode	22.8..25.6V, If=100mA, Zzt=70Ω, 200mW	SC-59	16dc	-	3a	Pan
24M	-	XC6202P202MR	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
24N	-	XC6202P212MR	LVR-IC	LDO, 2.1V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
24P	-	XC6202P222MR	LVR-IC	LDO, 2.2V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
24R	-	XC6202P232MR	LVR-IC	LDO, 2.3V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
24S	-	MMBZ5224SPT	Z-diode	2.774..2.856V, Izt=5mA, Zzt=100Ω, 225mW	SOT-23	16dc	-	3a	Chm
24S	-	MMCZ5224SPT	Z-diode	2.774..2.856V, Izt=5mA, Zzt=100Ω, 225mW	SOT-346	16dc	-	3a	Chm
24S	-	XC6202P242MR	LVR-IC	LDO, 2.4V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
24T	-	TK71524AS	LVR-IC	LDO, 2.4V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
24T	-	XC6202P252MR	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
24U	-	XC6202P262MR	LVR-IC	LDO, 2.6V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
24V	-	CHPZ24VPT	Z-diode	Dual, 22.8..25.2V, Izt=5mA, Zzt=70Ω, 350mW	SOT-23	16df	-	3a	Chm
24V	-	PZM24NB	Z-diode	24V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
24V	-	XC6202P272MR	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
24X	-	02CZ24-X	Z-diode	22.8..24.11V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
24X	-	TZT24XW	Z-diode	22.80..23.61V, Izt=5mA, Zzt=40Ω, 200mW	SOT-23	16dc	-	3a	Ttr
24X	-	XC6202P282MR	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
24X	-	Z02W24VX	Z-diode	22.80..24.11V, Izt=5mA, Zzt=40Ω, 200mW	SOT-23	16dc	-	3f	Kec
24Y	-	02CZ24-Y	Z-diode	23.61..24.92V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
24Y	-	TZT24YW	Z-diode	23.61..24.92V, Izt=5.0mA, 200mW	SOT-23	16dc	-	3a	Ttr
24Y	-	XC6202P292MR	LVR-IC	LDO, 2.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
24Y	-	Z02W24VY	Z-diode	23.61..24.92V, Izt=5mA, Zzt=40Ω, 200mW	SOT-23	16dc	-	3f	Kec
24Z	-	02CZ24-Z	Z-diode	24.42..25.6V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
24Z	-	CZ1W24	Z-diode	24V±5%, Izt=10.5mA, 600mW	SOT-23	16dc	-	3a	Cdi
24Z	-	TZT24ZW	Z-diode	24.92..25.60V, Izt=5mA, Zzt=40Ω, 200mW	SOT-23	16dc	-	3a	Ttr
24Z	-	XC6202P302MR	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
24Z	-	Z02W24VZ	Z-diode	24.42..25.60V, Izt=5mA, Zzt=40Ω, 200mW	SOT-23	16dc	-	3f	Kec
25	-	DTC124EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=22k/22k	SOT-416	16ta	-	3a	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
25	-	DTC124EKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SOT-346	16ta	-	3a	Rhm
25	-	DTC124EM	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=22k/22k	VMT3	18ta	-	3a	Rhm
25	-	DTC124EUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	UMT3	16ta	-	3a	Rhm
25	-	ELM9725NBB	Vdet-IC	2.5V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
25	-	ELM9825BB	LVR-IC	2.5V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
25	-	PDTA143XK	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k	SC-59	16ta	-	3a	Nxp
250	-	KTY82/250	Tdet-IC	Sensor, Rs=1900..2100Ω(25°C, 1mA)	SOT-23	16ag	-	3a	Nxp
250	-	XC6202P312MR	LVR-IC	LDO, 3.1V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
250AC	-	BL8509-250ACRM	Vdet-IC	2.5V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
250AC	-	LC9009CB3TR250AC	Vdet-IC	2.5V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
250AN	-	BL8509-250ANRM	Vdet-IC	2.5V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
250AN	-	LC9009CB3TR250AN	Vdet-IC	2.5V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
250BC	-	BL8509-250BCRM	Vdet-IC	2.5V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
250BC	-	LC9009CB3TR250BC	Vdet-IC	2.5V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
250BN	-	BL8509-250BNRM	Vdet-IC	2.5V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
250BN	-	LC9009CB3TR250BN	Vdet-IC	2.5V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
250CC	-	BL8509-250CCRM	Vdet-IC	2.5V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
250CC	-	LC9009CB3TR250CC	Vdet-IC	2.5V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
250CN	-	BL8509-250CNRM	Vdet-IC	2.5V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
250CN	-	LC9009CB3TR250CN	Vdet-IC	2.5V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
250DC	-	BL8509-250DCRM	Vdet-IC	2.5V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
250DC	-	LC9009CB3TR250DC	Vdet-IC	2.5V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
250DN	-	BL8509-250DNRM	Vdet-IC	2.5V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
250DN	-	LC9009CB3TR250DN	Vdet-IC	2.5V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
250EC	-	BL8509-250ECRM	Vdet-IC	2.5V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
250EC	-	LC9009CB3TR250EC	Vdet-IC	2.5V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
250EN	-	BL8509-250ENRM	Vdet-IC	2.5V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
250EN	-	LC9009CB3TR250EN	Vdet-IC	2.5V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
250FC	-	BL8509-250FCRM	Vdet-IC	2.5V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
250FC	-	LC9009CB3TR250FC	Vdet-IC	2.5V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
250FN	-	BL8509-250FNRM	Vdet-IC	2.5V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
250FN	-	LC9009CB3TR250FN	Vdet-IC	2.5V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
250GC	-	BL8509-250GCRM	Vdet-IC	2.5V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
250GC	-	LC9009CB3TR250GC	Vdet-IC	2.5V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
250GN	-	BL8509-250GNRM	Vdet-IC	2.5V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
250GN	-	LC9009CB3TR250GN	Vdet-IC	2.5V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
251	-	KTY82/251	Tdet-IC	Sensor, Rs=1900..2000Ω(25°C, 1mA)	SOT-23	16ag	-	3a	Nxp
251	-	XC6202P322MR	LVR-IC	LDO, 3.2V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
252	-	XC6202P332MR	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25-2	-	UTC8125-2	Vdet-IC	2.5V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
253	-	XC6202P342MR	LVR-IC	LDO, 3.4V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25-3	-	UTC8125-3	Vdet-IC	2.5V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
254	-	XC6202P352MR	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
255	-	KTY82/252	Tdet-IC	Sensor, Rs=2000..2100Ω(25°C, 1mA)	SOT-23	16ag	-	3a	Nxp
255	-	XC6202P362MR	LVR-IC	LDO, 3.6V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25-5	-	UTC8125-5	Vdet-IC	2.5V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
256	-	XC6202P372MR	LVR-IC	LDO, 3.7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
257	-	XC6202P382MR	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
258	-	XC6202P392MR	LVR-IC	LDO, 3.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
259	-	XC6202P402MR	LVR-IC	LDO, 4.0V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25A	-	AAT60025A-S2	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
25A	-	XC6202P412MR	LVR-IC	LDO, 4.1V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25B	-	AAT60025B-S2	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
25B	-	MMBZ5225BPT	Z-diode	2.850..3.150V, Izt=5mA, Zzt=95Ω, 225mW	SOT-23	16dc	-	3a	Chm
25B	-	XC6202P422MR	LVR-IC	LDO, 4.2V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25C	-	AAT60025C-S2	Vdet-IC	2.5V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
25C	-	XC6202P432MR	LVR-IC	LDO, 4.3V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25D	-	AAT60025D-S2	Vdet-IC	2.5V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
25D	-	XC6202P442MR	LVR-IC	LDO, 4.4V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25E	-	XC6202P452MR	LVR-IC	LDO, 4.5V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25F	-	XC6202P462MR	LVR-IC	LDO, 4.6V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25G	-	ZD25G-AE3	Z-diode	25V±5%, Zzt=130Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
25H	-	XC6202P472MR	LVR-IC	LDO, 4.7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25K	-	XC6202P482MR	LVR-IC	LDO, 4.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25L	-	XC6202P492MR	LVR-IC	LDO, 4.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25L	-	ZD25L-AE3	Z-diode	25V±5%, Zzt=130Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
25L	-	ZR40402F25TA	Vref-IC	2.5V±2%, 25mA, <0.4Ω	SOT-23	16dk	RF1	3a	Zx
25M	-	XC6202P502MR	LVR-IC	LDO, 5.0V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25M	-	ZR40401F25TA	Vref-IC	2.5V±1%, 25mA, <0.4Ω	SOT-23	16dk	RF1	3a	Zx
25N	-	STM1061N25W	Vdet-IC	2.5V±2%, -Reset ODO	SOT-323	16vda	VD6	3d	Ste

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
25N	-	STM1061N25WX	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Ste
25N	-	XC6202P512MR	LVR-IC	LDO, 5.1V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25P	-	XC6202P522MR	LVR-IC	LDO, 5.2V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25R	-	XC6202P532MR	LVR-IC	LDO, 5.3V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25S	-	MMBZ5225SPT	Z-diode	2.940..3.060V, Izt=5mA, Zzt=95Ω, 225mW	SOT-23	16dc	-	3a	Chm
25S	-	MMCZ5225SPT	Z-diode	2.940..3.060V, Izt=5mA, Zzt=95Ω, 225mW	SOT-346	16dc	-	3a	Chm
25S	-	XC6202P542MR	LVR-IC	LDO, 5.4V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25T	-	TK71525AS	LVR-IC	LDO, 2.5V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
25T	-	XC6202P552MR	LVR-IC	LDO, 5.5V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25U	-	XC6202P562MR	LVR-IC	LDO, 5.6V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25V	-	CHPZ25VPT	Z-diode	Dual, 23.7..26.3V, Izt=5mA, Zzt=70Ω, 350mW	SOT-23	16df	-	3a	Chm
25V	-	XC6202P572MR	LVR-IC	LDO, 5.7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25V	-	ZR404005F25TA	Vref-IC	2.5V±0.5%, 25mA, <0.4Ω	SOT-23	16dk	RF1	3a	Zx
25X	-	XC6202P582MR	LVR-IC	LDO, 5.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25Y	-	XC6202P592MR	LVR-IC	LDO, 5.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
25Z	-	XC6202P602MR	LVR-IC	LDO, 6.0V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26	-	DTC144EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=47k/47k	SOT-416	16ta	-	3a	Rhm
26	-	DTC144EKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	SOT-346	16ta	-	3a	Rhm
26	-	DTC144EM	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=47k/47k	VMT3	18ta	-	3a	Rhm
26	-	DTC144EUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	UMT3	16ta	-	3a	Rhm
26	-	ELM9726NBB	Vdet-IC	2.6V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
26	-	ELM9826BB	LVR-IC	2.6V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
26	-	PDTC143XK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k	SC-59	16ta	-	3a	Nxp
260	-	2STR2160	Si-pnp	Sw, 60V, 1A, 500mW, B=180..560, 220/500ns	SOT-23	16ta	-	3a	Ste
260	-	XC6202P612MR	LVR-IC	LDO, 6.1V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
260AC	-	BL8509-260ACRM	Vdet-IC	2.6V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
260AC	-	LC9009CB3TR260AC	Vdet-IC	2.6V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
260AN	-	BL8509-260ANRM	Vdet-IC	2.6V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
260AN	-	LC9009CB3TR260AN	Vdet-IC	2.6V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
260BC	-	BL8509-260BCRM	Vdet-IC	2.6V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
260BC	-	LC9009CB3TR260BC	Vdet-IC	2.6V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
260BN	-	BL8509-260BNRM	Vdet-IC	2.6V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
260BN	-	LC9009CB3TR260BN	Vdet-IC	2.6V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
260CC	-	BL8509-260CCRM	Vdet-IC	2.6V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
260CC	-	LC9009CB3TR260CC	Vdet-IC	2.6V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
260CN	-	BL8509-260CNRM	Vdet-IC	2.6V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
260CN	-	LC9009CB3TR260CN	Vdet-IC	2.6V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
260DC	-	BL8509-260DCRM	Vdet-IC	2.6V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
260DC	-	LC9009CB3TR260DC	Vdet-IC	2.6V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
260DN	-	BL8509-260DNRM	Vdet-IC	2.6V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
260DN	-	LC9009CB3TR260DN	Vdet-IC	2.6V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
260EC	-	BL8509-260ECRM	Vdet-IC	2.6V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
260EC	-	LC9009CB3TR260EC	Vdet-IC	2.6V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
260EN	-	BL8509-260ENRM	Vdet-IC	2.6V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
260EN	-	LC9009CB3TR260EN	Vdet-IC	2.6V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
260FC	-	BL8509-260FCRM	Vdet-IC	2.6V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
260FC	-	LC9009CB3TR260FC	Vdet-IC	2.6V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
260FN	-	BL8509-260FNRM	Vdet-IC	2.6V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
260FN	-	LC9009CB3TR260FN	Vdet-IC	2.6V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
260GC	-	BL8509-260GCRM	Vdet-IC	2.6V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
260GC	-	LC9009CB3TR260GC	Vdet-IC	2.6V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
260GN	-	BL8509-260GNRM	Vdet-IC	2.6V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
260GN	-	LC9009CB3TR260GN	Vdet-IC	2.6V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
261	-	XC6202P622MR	LVR-IC	LDO, 6.2V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
262	-	XC6202P632MR	LVR-IC	LDO, 6.3V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26-2	-	UTC8126-2	Vdet-IC	2.6V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
263	-	XC6202P642MR	LVR-IC	LDO, 6.4V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26-3	-	UTC8126-3	Vdet-IC	2.6V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
263AC	-	BL8509-263ACRM	Vdet-IC	2.63V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
263AN	-	BL8509-263ANRM	Vdet-IC	2.63V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
263BC	-	BL8509-263BCRM	Vdet-IC	2.63V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
263BN	-	BL8509-263BNRM	Vdet-IC	2.63V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
263CC	-	BL8509-263CCRM	Vdet-IC	2.63V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
263CN	-	BL8509-263CNRM	Vdet-IC	2.63V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
263DC	-	BL8509-263DCRM	Vdet-IC	2.63V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
263DN	-	BL8509-263DNRM	Vdet-IC	2.63V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
263EC	-	BL8509-263ECRM	Vdet-IC	2.63V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
263EN	-	BL8509-263ENRM	Vdet-IC	2.63V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
263FC	-	BL8509-263FCRM	Vdet-IC	2.63V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
263FN	-	BL8509-263FNRM	Vdet-IC	2.63V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
263GC	-	BL8509-263GCRM	Vdet-IC	2.63V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
263GN	-	BL8509-263GNRM	Vdet-IC	2.63V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
264	-	XC6202P652MR	LVR-IC	LDO, 6.5V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
265	-	XC6202P662MR	LVR-IC	LDO, 6.6V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26-5	-	UTC8126-5	Vdet-IC	2.6V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
266	-	XC6202P672MR	LVR-IC	LDO, 6.7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
267	-	XC6202P682MR	LVR-IC	LDO, 6.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
268	-	XC6202P692MR	LVR-IC	LDO, 6.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
269	-	XC6202P702MR	LVR-IC	LDO, 7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26A	-	AAT60026A-S2	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
26A	-	XC6202P712MR	LVR-IC	LDO, 7.1V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26B	-	AAT60026B-S2	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
26B	-	MMBZ5226BPT	Z-diode	3.135..3.465V, Izt=5mA, Zzt=95Ω, 225mW	SOT-23	16dc	-	3a	Chm
26B	-	XC6202P722MR	LVR-IC	LDO, 7.2V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26C	-	AAT60026C-S2	Vdet-IC	2.6V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
26C	-	XC6202P732MR	LVR-IC	LDO, 7.3V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26D	-	AAT60026D-S2	Vdet-IC	2.6V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
26D	-	XC6202P742MR	LVR-IC	LDO, 7.4V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26E	-	XC6202P752MR	LVR-IC	LDO, 7.5V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26F	-	XC6202P762MR	LVR-IC	LDO, 7.6V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26H	-	XC6202P772MR	LVR-IC	LDO, 7.7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26K	-	XC6202P782MR	LVR-IC	LDO, 7.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26L	-	XC6202P792MR	LVR-IC	LDO, 7.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26M	-	XC6202P802MR	LVR-IC	LDO, 8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26N	-	STM1061N26W	Vdet-IC	2.6V±2%, -Reset ODO	SOT-323	16vda	VD6	3d	Ste
26N	-	STM1061N26WX	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Ste
26N	-	XC6202P812MR	LVR-IC	LDO, 8.1V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26P	-	XC6202P822MR	LVR-IC	LDO, 8.2V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26R	-	XC6202P832MR	LVR-IC	LDO, 8.3V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26S	-	MMBZ5226SPT	Z-diode	3.234..3.366V, Izt=5mA, Zzt=95Ω, 225mW	SOT-23	16dc	-	3a	Chm
26S	-	MMCZ5226SPT	Z-diode	3.234..3.366V, Izt=5mA, Zzt=95Ω, 225mW	SOT-346	16dc	-	3a	Chm
26S	-	XC6202P842MR	LVR-IC	LDO, 8.4V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26T	-	TK71526AS	LVR-IC	LDO, 2.6V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
26T	-	XC6202P852MR	LVR-IC	LDO, 8.5V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26U	-	XC6202P862MR	LVR-IC	LDO, 8.6V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26V	-	XC6202P872MR	LVR-IC	LDO, 8.7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26X	-	XC6202P882MR	LVR-IC	LDO, 8.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26Y	-	XC6202P892MR	LVR-IC	LDO, 8.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
26Z	-	XC6202P902MR	LVR-IC	LDO, 9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27	-	BAS70-04	Si-diode	Dual, SBD, 70V, 200mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dl	-	3a	Zx
27	-	ELM9727NBB	Vdet-IC	2.7V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
27	-	ELM9827BB	LVR-IC	2.7V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
27	-	PDTA113ZK	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=1k/10k	SOT-346	16ta	-	3a	Nxp
27	-	PDTA123JE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=2.2k/47k	SOT-416	16ta	-	3a	Nxp
27	-	PDTA123JEF	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k	SOT-490	18ta	-	3a	Nxp
27-	ca	HZM27NB	Z-diode	25.1..28.9V, Izt=2mA, 200mW	SC-59A	16dc	-	3a	Ren
270	-	HZM2.7NB	Z-diode	2.5..2.9V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
270	-	XC6202P912MR	LVR-IC	LDO, 9.1V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
270AC	-	BL8509-270ACRM	Vdet-IC	2.7V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
270AC	-	LC9009CB3TR270AC	Vdet-IC	2.7V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
270AN	-	BL8509-270ANRM	Vdet-IC	2.7V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
270AN	-	LC9009CB3TR270AN	Vdet-IC	2.7V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
270BC	-	BL8509-270BCRM	Vdet-IC	2.7V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
270BC	-	LC9009CB3TR270BC	Vdet-IC	2.7V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
270BN	-	BL8509-270BNRM	Vdet-IC	2.7V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
270BN	-	LC9009CB3TR270BN	Vdet-IC	2.7V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
270CC	-	BL8509-270CCRM	Vdet-IC	2.7V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
270CC	-	LC9009CB3TR270CC	Vdet-IC	2.7V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
270CN	-	BL8509-270CNRM	Vdet-IC	2.7V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
270CN	-	LC9009CB3TR270CN	Vdet-IC	2.7V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
270DC	-	BL8509-270DCRM	Vdet-IC	2.7V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
270DC	-	LC9009CB3TR270DC	Vdet-IC	2.7V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
270DN	-	BL8509-270DNRM	Vdet-IC	2.7V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
270DN	-	LC9009CB3TR270DN	Vdet-IC	2.7V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
270EC	-	BL8509-270ECRM	Vdet-IC	2.7V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
270EC	-	LC9009CB3TR270EC	Vdet-IC	2.7V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
270EN	-	BL8509-270ENRM	Vdet-IC	2.7V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
270EN	-	LC9009CB3TR270EN	Vdet-IC	2.7V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
270FC	-	BL8509-270FCRM	Vdet-IC	2.7V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
270FC	-	LC9009CB3TR270FC	Vdet-IC	2.7V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
270FN	-	BL8509-270FNRM	Vdet-IC	2.7V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
270FN	-	LC9009CB3TR270FN	Vdet-IC	2.7V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
270GC	-	BL8509-270GCRM	Vdet-IC	2.7V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
270GC	-	LC9009CB3TR270GC	Vdet-IC	2.7V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
270GN	-	BL8509-270GNRM	Vdet-IC	2.7V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
270GN	-	LC9009CB3TR270GN	Vdet-IC	2.7V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
271	-	HZM2.7NB1	Z-diode	2.5..2.75V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
271	-	PZM2.7NB1	Z-diode	2.7V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
271	-	XC6202P922MR	LVR-IC	LDO, 9.2V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
272	-	HZM2.7NB2	Z-diode	2.65..2.9V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
272	-	PZM2.7NB2	Z-diode	2.7V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
272	-	XC6202P932MR	LVR-IC	LDO, 9.3V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27-2	-	UTC8127-2	Vdet-IC	2.7V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
273	-	XC6202P942MR	LVR-IC	LDO, 9.4V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27-3	-	UTC8127-3	Vdet-IC	2.7V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
274	-	XC6202P952MR	LVR-IC	LDO, 9.5V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
275	-	XC6202P962MR	LVR-IC	LDO, 9.6V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27-5	-	UTC8127-5	Vdet-IC	2.7V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
276	-	XC6202P972MR	LVR-IC	LDO, 9.7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
277	-	XC6202P982MR	LVR-IC	LDO, 9.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
278	-	XC6202P992MR	LVR-IC	LDO, 9.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
279	-	XC6202PA02MR	LVR-IC	LDO, 10V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27A	-	AAT60027A-S2	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
27A	-	MMBZ27VA	TVS	Dual, Vrwm=22V, Vbr=25.65..28.35V, 1.0A, 40W(1ms)	SOT-23	16dg	-	3a	Wtr
27A	-	TZT27W	Z-diode	26.19..27.53V, Izt=2.0mA, 200mW	SOT-23	16dc	-	3a	Ttr
27A	-	XC6202PA12MR	LVR-IC	LDO, 10.1V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27B	-	AAT60027B-S2	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
27B	-	BZX84C27-V	Z-diode	26.19..27.53V, Izt=2mA, Zzt=150Ω, 300mW	SOT-23	16dc	-	3f	Kec
27B	-	MMBZ5227BPT	Z-diode	3.420..3.780V, Izt=5mA, Zzt=90Ω, 225mW	SOT-23	16dc	-	3a	Chm
27B	-	XC6202PA22MR	LVR-IC	LDO, 10.2V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27C	-	AAT60027C-S2	Vdet-IC	2.7V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
27C	-	XC6202PA32MR	LVR-IC	LDO, 10.3V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27D	-	AAT60027D-S2	Vdet-IC	2.7V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
27D	-	XC6202PA42MR	LVR-IC	LDO, 10.4V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27E	-	XC6202PA52MR	LVR-IC	LDO, 10.5V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27F	-	XC6202PA62MR	LVR-IC	LDO, 10.6V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27G	-	ZD27G-AE3	Z-diode	27V±5%, Zzt=150Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
27H	-	MAZ3270-H	Z-diode	25.1..28.9V, If=100mA, Zzt=80Ω, 200mW	SC-59	16dc	-	3a	Pan
27H	-	XC6202PA72MR	LVR-IC	LDO, 10.7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27K	-	XC6202PA82MR	LVR-IC	LDO, 10.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27L	-	MAZ3270-L	Z-diode	25.1..28.9V, If=100mA, Zzt=80Ω, 200mW	SC-59	16dc	-	3a	Pan
27L	-	XC6202PA92MR	LVR-IC	LDO, 10.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27L	-	ZD27L-AE3	Z-diode	27V±5%, Zzt=150Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
27M	-	MAZ3270-M	Z-diode	25.1..28.9V, If=100mA, Zzt=80Ω, 200mW	SC-59	16dc	-	3a	Pan
27M	-	XC6202PB02MR	LVR-IC	LDO, 11V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27N	-	STM1061N27W	Vdet-IC	2.7V±2%, -Reset ODO	SOT-323	16vda	VD6	3d	Ste
27N	-	STM1061N27WX	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Ste
27N	-	XC6202PB12MR	LVR-IC	LDO, 11.1V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27P	-	XC6202PB22MR	LVR-IC	LDO, 11.2V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27R	-	XC6202PB32MR	LVR-IC	LDO, 11.3V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27S	-	MMBZ5227SPT	Z-diode	3.528..3.762V, Izt=5mA, Zzt=90Ω, 225mW	SOT-23	16dc	-	3a	Chm
27S	-	MMCZ5227SPT	Z-diode	3.528..3.762V, Izt=5mA, Zzt=90Ω, 225mW	SOT-346	16dc	-	3a	Chm
27S	-	XC6202PB42MR	LVR-IC	LDO, 11.4V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27T	-	TK71527AS	LVR-IC	LDO, 2.7V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
27T	-	XC6202PB52MR	LVR-IC	LDO, 11.5V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27U	-	XC6202PB62MR	LVR-IC	LDO, 11.6V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27V	-	CHPZ27VPT	Z-diode	Dual, 25.1..28.9V, Izt=2mA, Zzt=80Ω, 350mW	SOT-23	16df	-	3a	Chm
27V	-	PZM27NB	Z-diode	27V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
27V	-	XC6202PB72MR	LVR-IC	LDO, 11.7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27X	-	XC6202PB82MR	LVR-IC	LDO, 11.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27Y	-	XC6202PB92MR	LVR-IC	LDO, 11.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
27Z	-	02CZ27Z	Z-diode	25.1..28.9V, Izt=2mA, 200mW	SC-59	16dc	-	3a	Tos
27Z	-	CZ1W27	Z-diode	27V±5%, Izt=9.5mA, 600mW	SOT-23	16dc	-	3a	Cdi
27Z	-	XC6202PC02MR	LVR-IC	LDO, 12V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28	-	ELM9728NBB	Vdet-IC	2.8V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
28	-	ELM9828BB	LVR-IC	2.8V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
28	-	PDTC115TK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=100k	SC-59	16ta	-	3a	Nxp
280	-	XC6202PC12MR	LVR-IC	LDO, 12.1V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
280AC	-	BL8509-280ACRM	Vdet-IC	2.8V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
280AC	-	LC9009CB3TR280AC	Vdet-IC	2.8V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
280AN	-	BL8509-280ANRM	Vdet-IC	2.8V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
280AN	-	LC9009CB3TR280AN	Vdet-IC	2.8V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
280BC	-	BL8509-280BCRM	Vdet-IC	2.8V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
280BC	-	LC9009CB3TR280BC	Vdet-IC	2.8V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
280BN	-	BL8509-280BNRM	Vdet-IC	2.8V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
280BN	-	LC9009CB3TR280BN	Vdet-IC	2.8V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
280CC	-	BL8509-280CCRM	Vdet-IC	2.8V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
280CC	-	LC9009CB3TR280CC	Vdet-IC	2.8V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
280CN	-	BL8509-280CNRM	Vdet-IC	2.8V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
280CN	-	LC9009CB3TR280CN	Vdet-IC	2.8V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
280DC	-	BL8509-280DCRM	Vdet-IC	2.8V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
280DC	-	LC9009CB3TR280DC	Vdet-IC	2.8V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
280DN	-	BL8509-280DNRM	Vdet-IC	2.8V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
280DN	-	LC9009CB3TR280DN	Vdet-IC	2.8V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
280EC	-	BL8509-280ECRM	Vdet-IC	2.8V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
280EC	-	LC9009CB3TR280EC	Vdet-IC	2.8V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
280EN	-	BL8509-280ENRM	Vdet-IC	2.8V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
280EN	-	LC9009CB3TR280EN	Vdet-IC	2.8V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
280FC	-	BL8509-280FCRM	Vdet-IC	2.8V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
280FC	-	LC9009CB3TR280FC	Vdet-IC	2.8V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
280FN	-	BL8509-280FNRM	Vdet-IC	2.8V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
280FN	-	LC9009CB3TR280FN	Vdet-IC	2.8V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
280GC	-	BL8509-280GCRM	Vdet-IC	2.8V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
280GC	-	LC9009CB3TR280GC	Vdet-IC	2.8V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
280GN	-	BL8509-280GNRM	Vdet-IC	2.8V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
280GN	-	LC9009CB3TR280GN	Vdet-IC	2.8V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
281	-	XC6202PC22MR	LVR-IC	LDO, 12.2V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
282	-	XC6202PC32MR	LVR-IC	LDO, 12.3V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28-2	-	UTC8128-2	Vdet-IC	2.8V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
283	-	XC6202PC42MR	LVR-IC	LDO, 12.4V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28-3	-	UTC8128-3	Vdet-IC	2.8V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
284	-	XC6202PC52MR	LVR-IC	LDO, 12.5V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
285	-	XC6202PC62MR	LVR-IC	LDO, 12.6V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28-5	-	UTC8128-5	Vdet-IC	2.8V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
286	-	XC6202PC72MR	LVR-IC	LDO, 12.7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
287	-	XC6202PC82MR	LVR-IC	LDO, 12.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
288	-	XC6202PC92MR	LVR-IC	LDO, 12.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
289	-	XC6202PD02MR	LVR-IC	LDO, 13V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28A	-	AAT60028A-S2	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
28A	-	XC6202PD12MR	LVR-IC	LDO, 13.1V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28B	-	AAT60028B-S2	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
28B	-	MMBZ5228BPT	Z-diode	3.705..4.095V, Izt=5mA, Zzt=90Ω, 225mW	SOT-23	16dc	-	3a	Chm
28B	-	XC6202PD22MR	LVR-IC	LDO, 13.2V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28C	-	AAT60028C-S2	Vdet-IC	2.8V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
28C	-	BZX84B28	Z-diode	27.44..28.56V, Zzt=80Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
28C	-	TZTC28WS	Z-diode	26.60..29.40V, Izt=5mA, Zzt=80Ω, 200mW	SOT-323	16dc	-	3a	Ttr
28C	-	XC6202PD32MR	LVR-IC	LDO, 13.3V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28D	-	AAT60028D-S2	Vdet-IC	2.8V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
28D	-	XC6202PD42MR	LVR-IC	LDO, 13.4V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28E	-	XC6202PD52MR	LVR-IC	LDO, 13.5V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28F	-	XC6202PD62MR	LVR-IC	LDO, 13.6V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28H	-	XC6202PD72MR	LVR-IC	LDO, 13.7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28K	-	XC6202PD82MR	LVR-IC	LDO, 13.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28L	-	XC6202PD92MR	LVR-IC	LDO, 13.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28M	-	XC6202PE02MR	LVR-IC	LDO, 14V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28N	-	STM1061N28W	Vdet-IC	2.8V±2%, -Reset ODO	SOT-323	16vda	VD6	3d	Ste
28N	-	STM1061N28WX	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Ste
28N	-	XC6202PE12MR	LVR-IC	LDO, 14.1V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28P	-	XC6202PE22MR	LVR-IC	LDO, 14.2V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28R	-	XC6202PE32MR	LVR-IC	LDO, 14.3V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28S	-	MMBZ5228SPT	Z-diode	3.822..3.987V, Izt=5mA, Zzt=90Ω, 225mW	SOT-23	16dc	-	3a	Chm
28S	-	MMCZ5228SPT	Z-diode	3.822..3.987V, Izt=5mA, Zzt=90Ω, 225mW	SOT-346	16dc	-	3a	Chm
28S	-	XC6202PE42MR	LVR-IC	LDO, 14.4V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28T	-	TK71528AS	LVR-IC	LDO, 2.8V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
28T	-	XC6202PE52MR	LVR-IC	LDO, 14.5V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28U	-	XC6202PE62MR	LVR-IC	LDO, 14.6V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28V	-	CHPZ28VPT	Z-diode	Dual, 27.1..29.9V, Izt=2mA, Zzt=80Ω, 350mW	SOT-23	16df	-	3a	Chm
28V	-	XC6202PE72MR	LVR-IC	LDO, 14.7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28X	-	XC6202PE82MR	LVR-IC	LDO, 14.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
28Y	-	XC6202PE92MR	LVR-IC	LDO, 14.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
28Z	-	XC6202PF02MR	LVR-IC	LDO, 15V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29	-	DTC115EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=100k/100k	SOT-416	16ta	-	3a	Rhm
29	-	DTC115EKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=100k/100k	SOT-346	16ta	-	3a	Rhm
29	-	DTC115EM	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=100k/100k	VMT3	18ta	-	3a	Rhm
29	-	DTC115EUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=100k/100k	UMT3	16ta	-	3a	Rhm
29	-	ELM7619LAB	Vdet-IC	1.9V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
29	-	ELM9729NBB	Vdet-IC	2.9V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
29	-	ELM9829BB	LVR-IC	2.9V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
29	-	PDTC144VK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/10k	SC-59	16ta	-	3a	Nxp
290	-	XC6202PF12MR	LVR-IC	LDO, 15.1V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
290AC	-	BL8509-290ACRM	Vdet-IC	2.9V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
290AC	-	LC9009CB3TR290AC	Vdet-IC	2.9V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
290AN	-	BL8509-290ANRM	Vdet-IC	2.9V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
290AN	-	LC9009CB3TR290AN	Vdet-IC	2.9V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
290BC	-	BL8509-290BCRM	Vdet-IC	2.9V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
290BC	-	LC9009CB3TR290BC	Vdet-IC	2.9V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
290BN	-	BL8509-290BNRM	Vdet-IC	2.9V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
290BN	-	LC9009CB3TR290BN	Vdet-IC	2.9V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
290CC	-	BL8509-290CCRM	Vdet-IC	2.9V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
290CC	-	LC9009CB3TR290CC	Vdet-IC	2.9V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
290CN	-	BL8509-290CNRM	Vdet-IC	2.9V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
290CN	-	LC9009CB3TR290CN	Vdet-IC	2.9V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
290DC	-	BL8509-290DCRM	Vdet-IC	2.9V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
290DC	-	LC9009CB3TR290DC	Vdet-IC	2.9V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
290DN	-	BL8509-290DNRM	Vdet-IC	2.9V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
290DN	-	LC9009CB3TR290DN	Vdet-IC	2.9V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
290EC	-	BL8509-290ECRM	Vdet-IC	2.9V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
290EC	-	LC9009CB3TR290EC	Vdet-IC	2.9V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
290EN	-	BL8509-290ENRM	Vdet-IC	2.9V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
290EN	-	LC9009CB3TR290EN	Vdet-IC	2.9V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
290FC	-	BL8509-290FCRM	Vdet-IC	2.9V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
290FC	-	LC9009CB3TR290FC	Vdet-IC	2.9V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
290FN	-	BL8509-290FNRM	Vdet-IC	2.9V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
290FN	-	LC9009CB3TR290FN	Vdet-IC	2.9V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
290GC	-	BL8509-290GCRM	Vdet-IC	2.9V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
290GC	-	LC9009CB3TR290GC	Vdet-IC	2.9V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
290GN	-	BL8509-290GNRM	Vdet-IC	2.9V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
290GN	-	LC9009CB3TR290GN	Vdet-IC	2.9V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
291	-	XC6202PF22MR	LVR-IC	LDO, 15.2V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
292	-	XC6202PF32MR	LVR-IC	LDO, 15.3V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29-2	-	UTC8129-2	Vdet-IC	3.9V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
293	-	XC6202PF42MR	LVR-IC	LDO, 15.4V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29-3	-	UTC8129-3	Vdet-IC	3.9V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
293AC	-	LC9009CB3TR293AC	Vdet-IC	2.93V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
293AN	-	LC9009CB3TR293AN	Vdet-IC	2.93V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
293BC	-	LC9009CB3TR293BC	Vdet-IC	2.93V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
293BN	-	LC9009CB3TR293BN	Vdet-IC	2.93V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
293CC	-	LC9009CB3TR293CC	Vdet-IC	2.93V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
293CN	-	LC9009CB3TR293CN	Vdet-IC	2.93V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
293DC	-	LC9009CB3TR293DC	Vdet-IC	2.93V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
293DN	-	LC9009CB3TR293DN	Vdet-IC	2.93V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
293EC	-	LC9009CB3TR293EC	Vdet-IC	2.93V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
293EN	-	LC9009CB3TR293EN	Vdet-IC	2.93V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
293FC	-	LC9009CB3TR293FC	Vdet-IC	2.93V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
293FN	-	LC9009CB3TR293FN	Vdet-IC	2.93V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
293GC	-	LC9009CB3TR293GC	Vdet-IC	2.93V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
293GN	-	LC9009CB3TR293GN	Vdet-IC	2.93V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
294	-	XC6202PF52MR	LVR-IC	LDO, 15.5V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
295	-	XC6202PF62MR	LVR-IC	LDO, 15.6V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29-5	-	UTC8129-5	Vdet-IC	3.9V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
296	-	XC6202PF72MR	LVR-IC	LDO, 15.7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
297	-	XC6202PF82MR	LVR-IC	LDO, 15.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
298	-	XC6202PF92MR	LVR-IC	LDO, 15.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
299	-	XC6202PG02MR	LVR-IC	LDO, 16V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29A	-	AAT60029A-S2	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
29A	-	XC6202PG12MR	LVR-IC	LDO, 16.1V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29B	-	AAT60029B-S2	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
29B	-	MMBZ5229BPT	Z-diode	4.085..4.515V, Izt=5mA, Zzt=88Ω, 225mW	SOT-23	16dc	-	3a	Chm
29B	-	XC6202PG22MR	LVR-IC	LDO, 16.2V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29C	-	AAT60029C-S2	Vdet-IC	2.9V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
29C	-	XC6202PG32MR	LVR-IC	LDO, 16.3V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29D	-	AAT60029D-S2	Vdet-IC	2.9V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
29D	-	XC6202PG42MR	LVR-IC	LDO, 16.4V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29E	-	XC6202PG52MR	LVR-IC	LDO, 16.5V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29F	-	XC6202PG62MR	LVR-IC	LDO, 16.6V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29H	-	XC6202PG72MR	LVR-IC	LDO, 16.7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29K	-	XC6202PG82MR	LVR-IC	LDO, 16.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29L	-	XC6202PG92MR	LVR-IC	LDO, 16.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29M	-	XC6202PH02MR	LVR-IC	LDO, 17V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29N	-	STM1061N29W	Vdet-IC	2.9V±2%, -Reset ODO	SOT-323	16vda	VD6	3d	Ste
29N	-	STM1061N29WX	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Ste
29N	-	XC6202PH12MR	LVR-IC	LDO, 17.1V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29P	-	XC6202PH22MR	LVR-IC	LDO, 17.2V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29R	-	XC6202PH32MR	LVR-IC	LDO, 17.3V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29S	-	MMBZ5229SPT	Z-diode	4.214..4.386V, Izt=5mA, Zzt=88Ω, 225mW	SOT-23	16dc	-	3a	Chm
29S	-	MMCZ5229SPT	Z-diode	4.214..4.386V, Izt=5mA, Zzt=88Ω, 225mW	SOT-346	16dc	-	3a	Chm
29S	-	XC6202PH42MR	LVR-IC	LDO, 17.4V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29T	-	TK71529AS	LVR-IC	LDO, 2.9V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
29T	-	XC6202PH52MR	LVR-IC	LDO, 17.5V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29U	-	XC6202PH62MR	LVR-IC	LDO, 17.6V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29V	-	XC6202PH72MR	LVR-IC	LDO, 17.7V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29X	-	XC6202PH82MR	LVR-IC	LDO, 17.8V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29Y	-	XC6202PH92MR	LVR-IC	LDO, 17.9V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
29Z	-	XC6202PJ02MR	LVR-IC	LDO, 18V±2%, 150mA	SOT-23	16cj	VR1	3d	Tor
2A	-	CMBT3906	Si-pnp	GP, 40V, 200mA, 250mW, B=60..300, >250MHz	SOT-23	16ta	-	3a	Cdi
2A	-	FMMT3906	Si-pnp	GP, 40V, 200mA, 330mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Zx
2A	-	KST3906	Si-pnp	GP, 40V, 200mA, 350mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Sam
2A	-	MMBT3906	Si-pnp	Sw, AF, 60/40V, 100mA, 200mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Nsc
2A	-	MMBT3906W	Si-pnp	Sw, AF, 60/40V, 100mA, 200mW, B=100..300, >250MHz	SOT-323	16ta	-	3a	Mot
2A	-	PDTA123TE	Si-pnp-Digi	Sw, 50V, 100mA, 1500mW, R1=2.2k	SOT-416	16ta	-	3a	Nxp
2A	-	SMBT3906	Si-pnp	GP, 40V, 200mA 250MHz, B=100..300	SOT-23	16ta	-	3c	Inf
2A	-	TMPT3906	Si-pnp	Sw, AF, 40V, 100mA, 200mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	All
2A	-	TZT2.0W	Z-diode	1.85..2.15V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3a	Ttr
2A	-	YTS3906	Si-pnp	Sw, AF, 60/40V, 100mA, 200mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Tos
2A	-	Z02W2.0V	Z-diode	1.85..2.15V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3f	Kec
-2A	-	PMST3906	Si-pnp	GP, 60V, 100mA, 200mW, B=60..300, >250MHz	SOT-323	16ta	-	3a	PhH
2A0	-	TC55RP202ECB	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
2A0	-	XC62FP2002M	LVR-IC	2.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
2A4	-	PZM2.4NB2A	Z-diode	Dual, 2.4V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
2A5	-	AP1722A-12GV	LVR-IC	LDO, 1.2V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2A5	-	AP1722A-12PV	LVR-IC	LDO, 1.2V±2%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2A5	-	TC592002ECB	LVR-IC	LDO, -2.0V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
2A5	ca	AP1722A-12GC	LVR-IC	LDO, 1.2V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2A5	ca	AP1722A-12PC	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3b	Anw
2A5	cd	AP1722A-12GV1	LVR-IC	LDO, 1.2V±1%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2A5	cd	AP1722A-12PV1	LVR-IC	LDO, 1.2V±1%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2A5	ce	AP1722A-12GG1	LVR-IC	LDO, 1.2V±1%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2A5	ce	AP1722A-12PG1	LVR-IC	LDO, 1.2V±1%, 300mA	SOT-23	16cj	VR1	3b	Anw
2A5	ck	AP1722A-12GG	LVR-IC	LDO, 1.2V±2%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2A5	ck	AP1722A-12PG	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cj	VR1	3b	Anw
2A5	dc	AP1722A-12GC1	LVR-IC	LDO, 1.2V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2A5	dc	AP1722A-12PC1	LVR-IC	LDO, 1.2V±1%, 300mA	SOT-23	16cg	VR1	3b	Anw
2A7	-	PZM2.7NB2A	Z-diode	Dual, 2.7V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
2A8	-	AP1722A-15GV	LVR-IC	LDO, 1.5V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2A8	-	AP1722A-15PV	LVR-IC	LDO, 1.5V±2%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2A8	ca	AP1722A-15GC	LVR-IC	LDO, 1.5V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2A8	ca	AP1722A-15PC	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3b	Anw
2A8	cd	AP1722A-15GV1	LVR-IC	LDO, 1.5V±1%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2A8	cd	AP1722A-15PV1	LVR-IC	LDO, 1.5V±1%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2A8	ce	AP1722A-15GG1	LVR-IC	LDO, 1.5V±1%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2A8	ce	AP1722A-15PG1	LVR-IC	LDO, 1.5V±1%, 300mA	SOT-23	16cj	VR1	3b	Anw
2A8	ck	AP1722A-15GG	LVR-IC	LDO, 1.5V±2%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2A8	ck	AP1722A-15PG	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cj	VR1	3b	Anw
2A8	dc	AP1722A-15GC1	LVR-IC	LDO, 1.5V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2A8	dc	AP1722A-15PC1	LVR-IC	LDO, 1.5V±1%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AA	-	AP1722A-18GV	LVR-IC	LDO, 1.8V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AA	-	AP1722A-18PV	LVR-IC	LDO, 1.8V±2%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AA	ca	AP1722A-18GC	LVR-IC	LDO, 1.8V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2AA	ca	AP1722A-18PC	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AA	cd	AP1722A-18GV1	LVR-IC	LDO, 1.8V±1%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2AA	cd	AP1722A-18PV1	LVR-IC	LDO, 1.8V±1%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AA	ce	AP1722A-18GG1	LVR-IC	LDO, 1.8V±1%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AA	ce	AP1722A-18PG1	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AA	ck	AP1722A-18GG	LVR-IC	LDO, 1.8V±2%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AA	ck	AP1722A-18PG	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AA	dc	AP1722A-18GC1	LVR-IC	LDO, 1.8V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2AA	dc	AP1722A-18PC1	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AC	-	CMST3906	Si-pnp	GP, 40V, 200mA, 275mW, B=100..300, >250MHz	SOT-323	16ta	-	3a	Cen
2AC2	-	81C20-P-AE3-2	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
2AC2G	-	81C20G-P-AE3-2	Vdet-IC	2.0V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
2AC2L	-	81C20L-P-AE3-2	Vdet-IC	2.0V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
2AC3	-	81C20-P-AE3-3	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
2AC3G	-	81C20G-P-AE3-3	Vdet-IC	2.0V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
2AC3L	-	81C20L-P-AE3-3	Vdet-IC	2.0V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
2AC5	-	81C20-P-AE3-5	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
2AC5G	-	81C20G-P-AE3-5	Vdet-IC	2.0V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
2AC5L	-	81C20L-P-AE3-5	Vdet-IC	2.0V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
2AD	-	AP1722A-20GV	LVR-IC	LDO, 2.0V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AD	-	AP1722A-20PV	LVR-IC	LDO, 2.0V±2%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AD	ca	AP1722A-20GC	LVR-IC	LDO, 2.0V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2AD	ca	AP1722A-20PC	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AD	cd	AP1722A-20GV1	LVR-IC	LDO, 2.0V±1%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AD	cd	AP1722A-20PV1	LVR-IC	LDO, 2.0V±1%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AD	ce	AP1722A-20GG1	LVR-IC	LDO, 2.0V±1%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AD	ce	AP1722A-20PG1	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AD	ck	AP1722A-20GG	LVR-IC	LDO, 2.0V±2%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AD	ck	AP1722A-20PG	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AD	dc	AP1722A-20GC1	LVR-IC	LDO, 2.0V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2AD	dc	AP1722A-20PC1	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AG	-	AP1722A-25GV	LVR-IC	LDO, 2.5V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AG	-	AP1722A-25PV	LVR-IC	LDO, 2.5V±2%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AG	ca	AP1722A-25GC	LVR-IC	LDO, 2.5V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2AG	ca	AP1722A-25PC	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AG	cd	AP1722A-25GV1	LVR-IC	LDO, 2.5V±1%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AG	cd	AP1722A-25PV1	LVR-IC	LDO, 2.5V±1%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AG	ce	AP1722A-25GG1	LVR-IC	LDO, 2.5V±1%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AG	ce	AP1722A-25PG1	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AG	ck	AP1722A-25GG	LVR-IC	LDO, 2.5V±2%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AG	ck	AP1722A-25PG	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AG	dc	AP1722A-25GC1	LVR-IC	LDO, 2.5V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2AG	dc	AP1722A-25PC1	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AH	-	BZX84C2V0-V	Z-diode	1.85..2.15V, Izt=5mA, Zzt=100Ω, 300mW	SOT-23	16dc	-	3f	Kec
2AJ	-	AP1722A-27GV	LVR-IC	LDO, 2.7V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AJ	-	AP1722A-27PV	LVR-IC	LDO, 2.7V±2%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AJ	ca	AP1722A-27GC	LVR-IC	LDO, 2.7V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2AJ	ca	AP1722A-27PC	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AJ	cd	AP1722A-27GV1	LVR-IC	LDO, 2.7V±1%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AJ	cd	AP1722A-27PV1	LVR-IC	LDO, 2.7V±1%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AJ	ce	AP1722A-27GG1	LVR-IC	LDO, 2.7V±1%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AJ	ce	AP1722A-27PG1	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AJ	ck	AP1722A-27GG	LVR-IC	LDO, 2.7V±2%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AJ	ck	AP1722A-27PG	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AJ	dc	AP1722A-27GC1	LVR-IC	LDO, 2.7V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2AJ	dc	AP1722A-27PC1	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AK	-	AP1722A-28GV	LVR-IC	LDO, 2.8V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AK	-	AP1722A-28PV	LVR-IC	LDO, 2.8V±2%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AK	ca	AP1722A-28GC	LVR-IC	LDO, 2.8V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2AK	ca	AP1722A-28PC	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AK	cd	AP1722A-28GV1	LVR-IC	LDO, 2.8V±1%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AK	cd	AP1722A-28PV1	LVR-IC	LDO, 2.8V±1%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AK	ce	AP1722A-28GG1	LVR-IC	LDO, 2.8V±1%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AK	ce	AP1722A-28PG1	LVR-IC	LDO, 2.8V±1%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AK	ck	AP1722A-28GG	LVR-IC	LDO, 2.8V±2%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AK	ck	AP1722A-28PG	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AK	dc	AP1722A-28GC1	LVR-IC	LDO, 2.8V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2AK	dc	AP1722A-28PC1	LVR-IC	LDO, 2.8V±1%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AL	-	AP1722A-LLGV	LVR-IC	LDO, 2.85V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AL	-	AP1722A-LLPV	LVR-IC	LDO, 2.85V±2%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AL	cd	AP1722A-LLGV1	LVR-IC	LDO, 2.85V±1%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AL	cd	AP1722A-LLPV1	LVR-IC	LDO, 2.85V±1%, 300mA	TSOT-23	16cg	VR1	3b	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2AL	ce	AP1722A-LLGC1	LVR-IC	LDO, 2.85V±1%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AL	ce	AP1722A-LLGG1	LVR-IC	LDO, 2.85V±1%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AL	ce	AP1722A-LLPC1	LVR-IC	LDO, 2.85V±1%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AL	ck	AP1722A-LLPC	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AM	-	AP1722A-30GV	LVR-IC	LDO, 3.0V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AM	-	AP1722A-30PV	LVR-IC	LDO, 3.0V±2%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AM	ca	AP1722A-30GC	LVR-IC	LDO, 3.0V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2AM	ca	AP1722A-30PC	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AM	cd	AP1722A-30GV1	LVR-IC	LDO, 3.0V±1%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AM	cd	AP1722A-30PV1	LVR-IC	LDO, 3.0V±1%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AM	ce	AP1722A-30GG1	LVR-IC	LDO, 3.0V±1%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AM	ce	AP1722A-30PG1	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AM	ck	AP1722A-30GG	LVR-IC	LDO, 3.0V±2%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AM	ck	AP1722A-30PG	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AM	dc	AP1722A-30GC1	LVR-IC	LDO, 3.0V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2AM	dc	AP1722A-30PC1	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AN2	-	81N20-P-AE3-2	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
2AN2G	-	81N20G-P-AE3-2	Vdet-IC	2.0V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
2AN2L	-	81N20L-P-AE3-2	Vdet-IC	2.0V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
2AN3	-	81N20-P-AE3-3	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
2AN3G	-	81N20G-P-AE3-3	Vdet-IC	2.0V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
2AN3L	-	81N20L-P-AE3-3	Vdet-IC	2.0V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
2AN5	-	81N20-P-AE3-5	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
2AN5G	-	81N20G-P-AE3-5	Vdet-IC	2.0V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
2AN5L	-	81N20L-P-AE3-5	Vdet-IC	2.0V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
2AQ	-	2SD1304-Q	Si-npn+Di	AF, 20V, 100mA, 200mW, 150MHz, B=160..260	SC-59	16ta	-	3a	Pan
2AQ	-	AP1722A-33GV	LVR-IC	LDO, 3.3V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AQ	-	AP1722A-33PV	LVR-IC	LDO, 3.3V±2%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AQ	ca	AP1722A-33GC	LVR-IC	LDO, 3.3V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2AQ	ca	AP1722A-33PC	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AQ	cd	AP1722A-33GV1	LVR-IC	LDO, 3.3V±1%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AQ	cd	AP1722A-33PV1	LVR-IC	LDO, 3.3V±1%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AQ	ce	AP1722A-33GG1	LVR-IC	LDO, 3.3V±1%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AQ	ce	AP1722A-33PG1	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AQ	ck	AP1722A-33GG	LVR-IC	LDO, 3.3V±2%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AQ	ck	AP1722A-33PG	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AQ	dc	AP1722A-33GC1	LVR-IC	LDO, 3.3V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2AQ	dc	AP1722A-33PC1	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AR	-	2SD1304-R	Si-npn+Di	AF, 20V, 100mA, 200mW, 150MHz, B=210..340	SC-59	16ta	-	3a	Pan
2AS	-	2SD1304-S	Si-npn+Di	AF, 20V, 100mA, 200mW, 150MHz, B=290..460	SC-59	16ta	-	3a	Pan
2AV	-	AP1722A-35GV	LVR-IC	LDO, 3.5V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AV	-	AP1722A-35PV	LVR-IC	LDO, 3.5V±2%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AV	ca	AP1722A-35GC	LVR-IC	LDO, 3.5V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2AV	ca	AP1722A-35PC	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AV	cd	AP1722A-35GV1	LVR-IC	LDO, 3.5V±1%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3bb	Anw
2AV	cd	AP1722A-35PV1	LVR-IC	LDO, 3.5V±1%, 300mA	TSOT-23	16cg	VR1	3b	Anw
2AV	ce	AP1722A-35GG1	LVR-IC	LDO, 3.5V±1%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AV	ce	AP1722A-35PG1	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AV	ck	AP1722A-35GG	LVR-IC	LDO, 3.5V±2%, 300mA, Halogen-free	SOT-23	16cj	VR1	3bb	Anw
2AV	ck	AP1722A-35PG	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cj	VR1	3b	Anw
2AV	dc	AP1722A-35GC1	LVR-IC	LDO, 3.5V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
2AV	dc	AP1722A-35PC1	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-23	16cg	VR1	3b	Anw
2AX	-	TZT2.0XW	Z-diode	1.85..2.05V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3a	Ttr
2AX	-	Z02W2.0VX	Z-diode	1.85..2.05V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3f	Kec
2AZ	-	TZT2.0ZW	Z-diode	1.95..2.15V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3a	Ttr
2AZ	-	Z02W2.0VZ	Z-diode	1.95..2.15V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3f	Kec
2B	-	2N2907	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Nsc
2B	-	BC849B	Si-npn	GP, 30V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhM
2B	-	BC849BT	Si-npn	GP, 30V, 100mA, 200mW, B=250, >100MHz	SOT-416	16ta	-	3a	Phi
2B	-	BC849BW	Si-npn	GP, 30V, 100mA, 200mW, B=200..450, >100MHz	SOT-323	16ta	-	3a	PhH
2B	-	KST2907	Si-pnp	GP, 40V, 600mA, 350mW, B>75, >200MHz	SOT-23	16ta	-	3a	Sam
2B	-	MMBT2907	Si-pnp	GP, 40V, 500mA, 310mW, B=100..300, >200MHz	SOT-23	16ta	-	3g	Vs
2B	-	PDTC123TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1=2.2k	SOT-416	16ta	-	3a	Nxp
2B	-	R3131N22EC	Vdet-IC	2.2V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
2B	-	SMBT2907	Si-pnp	GP, 40V, 500mA, 310mW, B=100..300, >200MHz	SOT-23	16ta	-	3c	Inf
2B	-	TMPT2907	Si-pnp	GP, 40/40V, 500mA, 310mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	All
2B	-	TZT2.2W	Z-diode	2.05..2.38V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3a	Ttr
2B	-	YTS2907	Si-pnp	GP, 40V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Tos
2B	-	Z02W2.2V	Z-diode	2.05..2.38V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3f	Kec
2B0	-	TC55RP212ECB	LVR-IC	LDO, 2.1V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2B0	-	XC62FP2102M	LVR-IC	2.1V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
2B5	-	TC592102ECB	LVR-IC	LDO, -2.1V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
2B5	-	XC62KN212M	LVR-IC	LDO, -2.1V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
2BC2	-	81C21-P-AE3-2	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
2BC2G	-	81C21G-P-AE3-2	Vdet-IC	2.1V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
2BC2L	-	81C21L-P-AE3-2	Vdet-IC	2.1V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
2BC3	-	81C21-P-AE3-3	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
2BC3G	-	81C21G-P-AE3-3	Vdet-IC	2.1V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
2BC3L	-	81C21L-P-AE3-3	Vdet-IC	2.1V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
2BC5	-	81C21-P-AE3-5	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
2BC5G	-	81C21G-P-AE3-5	Vdet-IC	2.1V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
2BC5L	-	81C21L-P-AE3-5	Vdet-IC	2.1V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
2BH	-	BZX84C2V2-V	Z-diode	2.05..2.38V, Izt=5mA, Zzt=100Ω, 300mW	SOT-23	16dc	-	3f	Kec
2BN2	-	81N21-P-AE3-2	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
2BN2G	-	81N21G-P-AE3-2	Vdet-IC	2.1V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
2BN2L	-	81N21L-P-AE3-2	Vdet-IC	2.1V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
2BN3	-	81N21-P-AE3-3	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
2BN3G	-	81N21G-P-AE3-3	Vdet-IC	2.1V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
2BN3L	-	81N21L-P-AE3-3	Vdet-IC	2.1V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
2BN5	-	81N21-P-AE3-5	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
2BN5G	-	81N21G-P-AE3-5	Vdet-IC	2.1V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
2BN5L	-	81N21L-P-AE3-5	Vdet-IC	2.1V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
2Bp	-	BC849B	Si-npn	GP, 30V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhH
2BP	-	2SK0374-P	n-FET	AF, Sw, 55V, 30mA, 200mW, Idss=1..3mA, Up<5V	SC-59	16fa	-	3a	Pan
2BP	-	2SK0663-P	n-FET	AF, Sw, 55V, 30mA, 200mW, Idss=1..3mA, Up<5V	SOT-323	16fa	-	3a	Pan
2BP	-	2SK2593-P	n-FET	AF, Sw, 55V, ±30mA, 125mW, Idss=1..3mA	SC-89	18fa	-	3a	Pan
2BP	-	2SK374-P	n-FET	AF, Sw, 55V, 30mA, 200mW, Idss=1..3mA, Up<5V	SC-59	16fa	-	3a	Pan
2BP	-	2SK663-P	n-FET	AF, Sw, 55V, 30mA, 200mW, Idss=1..3mA, Up<5V	SOT-323	16fa	-	3a	Pan
2BQ	-	2SK0374-Q	n-FET	AF, Sw, 55V, 30mA, 200mW, Idss=2..6.5mA, Up<5V	SC-59	16fa	-	3a	Pan
2BQ	-	2SK0663-Q	n-FET	AF, Sw, 55V, 30mA, 200mW, Idss=2..6.5mA, Up<5V	SOT-323	16fa	-	3a	Pan
2BQ	-	2SK2593-Q	n-FET	AF, Sw, 55V, ±30mA, 125mW, Idss=2..6.5mA	SC-89	18fa	-	3a	Pan
2BQ	-	2SK374-Q	n-FET	AF, Sw, 55V, 30mA, 200mW, Idss=2..6.5mA, Up<5V	SC-59	16fa	-	3a	Pan
2BQ	-	2SK663-Q	n-FET	AF, Sw, 55V, 30mA, 200mW, Idss=2..6.5mA, Up<5V	SOT-323	16fa	-	3a	Pan
2BR	-	2SK0374-R	n-FET	AF, Sw, 55V, 30mA, 200mW, Idss=5..12mA, Up<5V	SC-59	16fa	-	3a	Pan
2BR	-	2SK0663-R	n-FET	AF, Sw, 55V, 30mA, 200mW, Idss=5..12mA, Up<5V	SOT-323	16fa	-	3a	Pan
2BR	-	2SK2593-R	n-FET	AF, Sw, 55V, ±30mA, 125mW, Idss=5..12mA	SC-89	18fa	-	3a	Pan
2BR	-	2SK374-R	n-FET	AF, Sw, 55V, 30mA, 200mW, Idss=5..12mA, Up<5V	SC-59	16fa	-	3a	Pan
2BR	-	2SK663-R	n-FET	AF, Sw, 55V, 30mA, 200mW, Idss=5..12mA, Up<5V	SOT-323	16fa	-	3a	Pan
2Bs	-	BC849B	Si-npn	GP, 30V, 100mA, 330mW, B=200..450, 250MHz	SOT-23	16ta	-	3a	Sie
2Bs	-	BC849BT	Si-npn	GP, 30V, 100mA, 200mW, B=250, >100MHz	SOT-416	16ta	-	3a	Inf
2Bs	-	BC849BW	Si-npn	GP, 30V, 100mA, 250mW, B=200..450, 250MHz	SOT-323	16ta	-	3c	Inf
2BS	-	2SK0374-S	n-FET	AF, Sw, 55V, 30mA, 200mW, Idss=10..20mA, Up<5V	SC-59	16fa	-	3a	Pan
2BS	-	2SK2593-S	n-FET	AF, Sw, 55V, ±30mA, 125mW, Idss=10..20mA	SC-89	18fa	-	3a	Pan
2BS	-	2SK374-S	n-FET	AF, Sw, 55V, 30mA, 200mW, Idss=10..20mA, Up<5V	SC-59	16fa	-	3a	Pan
2Bt	-	BC849BW	Si-npn	GP, 30V, 100mA, 200mW, B=200..450, >100MHz	SOT-323	16ta	-	3a	PhM
2BW	-	BC849B	Si-npn	GP, 30V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhC
2BW	-	BC849BW	Si-npn	GP, 30V, 100mA, 200mW, B=200..450, >100MHz	SOT-323	16ta	-	3a	PhC
2BX	-	TZT2.2XW	Z-diode	2.05..2.26V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3a	Ttr
2BX	-	Z02W2.2VX	Z-diode	2.05..2.26V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3f	Kec
2BZ	-	FMMT2907	Si-pnp	GP, 40V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Zx
2BZ	-	TZT2.2ZW	Z-diode	2.16..2.38V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3a	Ttr
2BZ	-	Z02W2.2VZ	Z-diode	2.16..2.38V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3f	Kec
2C	-	2SJ0536	p-MOSFET	V-MOS, LogL, 30V, 100mA, <75Ω	SOT-323	16fh	-	3a	Pan
2C	-	2SJ536	p-MOSFET	Sw, 30V, 100mA, 150mW, 50Ω(10mA), 8ms	SOT-323	16fh	-	3a	Pan
2C	-	BC849C	Si-npn	GP, 30V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhM
2C	-	BC849CT	Si-npn	GP, 30V, 100mA, 200mW, B=480, >100MHz	SOT-416	16ta	-	3a	Phi
2C	-	BC849CW	Si-npn	GP, 30V, 100mA, 200mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	PhH
2C	-	R3131N32EC	Vdet-IC	3.2V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
2C	-	SMBTA70	Si-pnp	GP, 40V, 100mA, 350mW, B=40..100, >125MHz	SOT-23	16ta	-	3c	Inf
2C	-	TMPTA70	Si-pnp	GP, 40V, 100mA, 350mW, B=40..100, >125MHz	SOT-23	16ta	-	3a	All
2C	-	TZT2.4W	Z-diode	2.28..2.60V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3a	Ttr
2C	-	Z02W2.4V	Z-diode	2.28..2.60V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3f	Kec
2C0	-	TC55RP222ECB	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
2C0	-	XC62FP2202M	LVR-IC	2.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
2C5	-	TC592202ECB	LVR-IC	LDO, -2.2V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
2C5	-	XC62KN222M	LVR-IC	LDO, -2.2V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
2CC2	-	81C22-P-AE3-2	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
2CC2G	-	81C22G-P-AE3-2	Vdet-IC	2.2V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
2CC2L	-	81C22L-P-AE3-2	Vdet-IC	2.2V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
2CC3	-	81C22-P-AE3-3	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2CC3G	-	81C22G-P-AE3-3	Vdet-IC	2.2V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
2CC3L	-	81C22L-P-AE3-3	Vdet-IC	2.2V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
2CC5	-	81C22-P-AE3-5	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
2CC5G	-	81C22G-P-AE3-5	Vdet-IC	2.2V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
2CC5L	-	81C22L-P-AE3-5	Vdet-IC	2.2V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
2CH	-	BZX84C2V4-V	Z-diode	2.28..2.60V, Izt=5mA, Zzt=100Ω, 300mW	SOT-23	16dc	-	3f	Kec
2CN2	-	81N22-P-AE3-2	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
2CN2G	-	81N22G-P-AE3-2	Vdet-IC	2.2V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
2CN2L	-	81N22L-P-AE3-2	Vdet-IC	2.2V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
2CN3	-	81N22-P-AE3-3	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
2CN3G	-	81N22G-P-AE3-3	Vdet-IC	2.2V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
2CN3L	-	81N22L-P-AE3-3	Vdet-IC	2.2V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
2CN5	-	81N22-P-AE3-5	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
2CN5G	-	81N22G-P-AE3-5	Vdet-IC	2.2V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
2CN5L	-	81N22L-P-AE3-5	Vdet-IC	2.2V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
2Cp	-	BC849C	Si-npn	GP, 30V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhH
2Cs	-	BC849C	Si-npn	GP, 30V, 100mA, 330mW, B=420..800, 250MHz	SOT-23	16ta	-	3a	Sie
2Cs	-	BC849CT	Si-npn	GP, 30V, 100mA, 200mW, B=480, >100MHz	SOT-416	16ta	-	3a	Inf
2Cs	-	BC849CW	Si-npn	GP, 30V, 100mA, 250mW, B=420..800, 250MHz	SOT-323	16ta	-	3c	Inf
2Ct	-	BC849CW	Si-npn	GP, 30V, 100mA, 200mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	PhM
2CW	-	BC849C	Si-npn	GP, 30V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhC
2CW	-	BC849CW	Si-npn	GP, 30V, 100mA, 200mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	PhC
2CX	-	TZT2.4XW	Z-diode	2.28..2.50V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3a	Ttr
2CX	-	Z02W2.4VX	Z-diode	2.28..2.50V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3f	Kec
2CZ	-	FMMTA70	Si-pnp	GP, 40V, 100mA, 330mW, B=40..400, >125MHz	SOT-23	16ta	-	3a	Zx
2CZ	-	TZT2.4ZW	Z-diode	2.40..2.60V, Izt=5mA, Zzt=100Ω, 200mW	SOT-23	16dc	-	3a	Ttr
2CZ	-	Z02W2.4VZ	Z-diode	2.40..2.60V, Izt=5mA, Zzt=10Ω, 200mW	SOT-23	16dc	-	3f	Kec
2D	-	2SK3064	n-MOSFET	Sw, 30V, 100mA, 150mW, 30Ω(10mA), 150/35ns	SOT-323	16fh	-	3a	Pan
2D	-	KST92	Si-pnp	Vid, 300V, 500mA, 350mW, B>40, >50MHz	SOT-23	16ta	-	3a	Sam
2D	-	MBTA92	Si-pnp	Vid, 300/300V, 500mA, 250mW, B>40, >50MHz	SOT-23	16ta	-	3a	Tos
2D	-	MMBD914PT	Si-diode	Sw, 100V, 200mA, Vf<1V(10mA), 4ns	SOT-23	16dc	-	3a	Chm
2D	-	MMBT92	Si-pnp	300V, 500mA, 300mW, B>40, >50MHz	SOT-23	16ta	-	3g	Vs
2D	-	MMBTA92	Si-pnp	Vid, 300V, 500mA, 330mW, B=25, >50MHz	SOT-23	16ta	-	3a	Vs
2D	-	R3131N42EC	Vdet-IC	4.2V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
2D	-	SMBTA92	Si-pnp	Vid, 300/300V, 500mA, 330mW, B=25, >50MHz	SOT-23	16ta	-	3c	Inf
2D	-	TZT2.7W	Z-diode	2.50..2.90V, Izt=5mA, Zzt=110Ω, 200mW	SOT-23	16dc	-	3a	Ttr
2D	-	Z02W2.7V	Z-diode	2.50..2.90V, Izt=5mA, Zzt=110Ω, 200mW	SOT-23	16dc	-	3f	Kec
-2D	-	PMSTA92	Si-pnp	Vid, 300/300V, 500mA, 200mW, B=25, >50MHz	SOT-323	16ta	-	3a	PhH
2D0	-	TC55RP232ECB	LVR-IC	LDO, 2.3V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
2D0	-	XC62FP2302M	LVR-IC	2.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
2D5	-	TC592302ECB	LVR-IC	LDO, -2.3V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
2D5	-	XC62KN232M	LVR-IC	LDO, -2.3V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
2DC2	-	81C23-P-AE3-2	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
2DC2G	-	81C23G-P-AE3-2	Vdet-IC	2.3V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
2DC2L	-	81C23L-P-AE3-2	Vdet-IC	2.3V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
2DC3	-	81C23-P-AE3-3	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
2DC3G	-	81C23G-P-AE3-3	Vdet-IC	2.3V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
2DC3L	-	81C23L-P-AE3-3	Vdet-IC	2.3V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
2DC5	-	81C23-P-AE3-5	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
2DC5G	-	81C23G-P-AE3-5	Vdet-IC	2.3V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
2DC5L	-	81C23L-P-AE3-5	Vdet-IC	2.3V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
2DH	-	BZX84C2V7-V	Z-diode	2.50..2.90V, Izt=5mA, Zzt=100Ω, 300mW	SOT-23	16dc	-	3f	Kec
2DN2	-	81N23-P-AE3-2	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
2DN2G	-	81N23G-P-AE3-2	Vdet-IC	2.3V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
2DN2L	-	81N23L-P-AE3-2	Vdet-IC	2.3V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
2DN3	-	81N23-P-AE3-3	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
2DN3G	-	81N23G-P-AE3-3	Vdet-IC	2.3V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
2DN3L	-	81N23L-P-AE3-3	Vdet-IC	2.3V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
2DN5	-	81N23-P-AE3-5	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
2DN5G	-	81N23G-P-AE3-5	Vdet-IC	2.3V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
2DN5L	-	81N23L-P-AE3-5	Vdet-IC	2.3V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
2Dp	-	BC849	Si-npn	GP, 30V, 100mA, 250mW, B=200..800, >100MHz	SOT-23	16ta	-	3a	PhH
2Dt	-	BC849W	Si-npn	GP, 30V, 100mA, 200mW, B=200..800, >100MHz	SOT-323	16ta	-	3a	Phi
2DW	-	BC849	Si-npn	GP, 30V, 100mA, 250mW, B=200..800, >100MHz	SOT-23	16ta	-	3a	PhC
2DX	-	TZT2.7XW	Z-diode	2.50..2.75V, Izt=5mA, Zzt=110Ω, 200mW	SOT-23	16dc	-	3a	Ttr
2DX	-	Z02W2.7VX	Z-diode	2.50..2.75V, Izt=5mA, Zzt=110Ω, 200mW	SOT-23	16dc	-	3f	Kec
2DZ	-	TZT2.7ZW	Z-diode	2.65..2.90V, Izt=5mA, Zzt=110Ω, 200mW	SOT-23	16dc	-	3a	Ttr
2DZ	-	Z02W2.7VZ	Z-diode	2.65..2.90V, Izt=5mA, Zzt=110Ω, 200mW	SOT-23	16dc	-	3f	Kec
2E	-	FMMTA93	Si-pnp	Vid, 200/200V, 500mA, 330mW, B=25, >50MHz	SOT-23	16ta	-	3a	Zx
2E	-	FT510Ea	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-23	16cq	VR1	3d	Fmd

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2E	-	KST93	Si-pnp	Vid, 200V, 500mA, 350mW, B>40, >50MHz	SOT-23	16ta	-	3a	Sam
2E	-	MMBTA93	Si-pnp	Vid, 200V, 500mA, 300mW, B>25, >50MHz	SOT-23	16ta	-	3a	Itt
2E	-	PDTA144WEF	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/22k	SOT-490	18ta	-	3a	Nxp
2E	-	R3131N30EC8	Vdet-IC	3V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
2E	-	SMBTA93	Si-pnp	Vid, 200/200V, 500mA, 330mW, B=25, >50MHz	SOT-23	16ta	-	3c	Inf
-2E	-	PMSTA93	Si-pnp	Vid, 200/200V, 500mA, 330mW, B=25, >50MHz	SOT-323	16ta	-	3a	PhH
2E0	-	TC55RP242ECB	LVR-IC	LDO, 2.4V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
2E0	-	XC62FP2402M	LVR-IC	2.4V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
2E5	-	TC592402ECB	LVR-IC	LDO, -2.4V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
2E5	-	XC62KN242M	LVR-IC	LDO, -2.4V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
2EC2	-	81C24-P-AE3-2	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
2EC2G	-	81C24G-P-AE3-2	Vdet-IC	2.4V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
2EC2L	-	81C24L-P-AE3-2	Vdet-IC	2.4V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
2EC3	-	81C24-P-AE3-3	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
2EC3G	-	81C24G-P-AE3-3	Vdet-IC	2.4V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
2EC3L	-	81C24L-P-AE3-3	Vdet-IC	2.4V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
2EC5	-	81C24-P-AE3-5	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
2EC5G	-	81C24G-P-AE3-5	Vdet-IC	2.4V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
2EC5L	-	81C24L-P-AE3-5	Vdet-IC	2.4V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
2EN2	-	81N24-P-AE3-2	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
2EN2G	-	81N24G-P-AE3-2	Vdet-IC	2.4V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
2EN2L	-	81N24L-P-AE3-2	Vdet-IC	2.4V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
2EN3	-	81N24-P-AE3-3	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
2EN3G	-	81N24G-P-AE3-3	Vdet-IC	2.4V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
2EN3L	-	81N24L-P-AE3-3	Vdet-IC	2.4V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
2EN5	-	81N24-P-AE3-5	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
2EN5G	-	81N24G-P-AE3-5	Vdet-IC	2.4V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
2EN5L	-	81N24L-P-AE3-5	Vdet-IC	2.4V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
2F	-	BC850B	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	Cdi
2F	-	BC850BT	Si-npn	GP, 50V, 100mA, 200mW, B=250, >100MHz	SOT-416	16ta	-	3a	Phi
2F	-	BC850BW	Si-npn	GP, 50V, 100mA, 200mW, B=200..450, >100MHz	SOT-323	16ta	-	3a	PhH
2F	-	FMMT2907A	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Zx
2F	-	FT510Fa	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-23	16cq	VR1	3d	Fmd
2F	-	KST2907A	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Sam
2F	-	MBT2907A	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Tos
2F	-	MBTA2907A	Si-pnp	AF, 60V, 600mA, 250mW, B>50, >200MHz	SOT-23	16ta	-	3a	Tos
2F	-	MMBT2907A	Si-pnp	GP, 60V, 500mA, 310mW, B=75..300, <200MHz	SOT-23	16ta	-	3a	Mot
2F	-	MMBT2907AT	Si-pnp	GP, 60V, 500mA, 310mW, B=75..300, <200MHz	SOT-523	16ta	-	3d	Di
2F	-	MMBT2907AW	Si-pnp	GP, 60V, 500mA, 310mW, B=75..300, <200MHz	SOT-323	16ta	-	3a	Mot
2F	-	SMBT2907A	Si-pnp	GP, 60V, 500mA, 310mW, B=100..300, >200MHz	SOT-23	16ta	-	3c	Inf
2F	-	TMPT2907A	Si-pnp	GP, 60/60V, 600mA, 350mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	All
2F	-	YTS2907A	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Tos
-2F	-	PMST2907A	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-323	16ta	-	3a	PhH
2F-	-	2SA1036KPT-R	Si-pnp	AF, Sw, 32V, 500mA, B=180..390, 200MHz	SOT-23	16ta	-	3a	Chm
2F-	-	2SA1037KPT	Si-pnp	AF, 60V, 150mA, 200mW, B=120..560, 140MHz	SOT-23	16ta	-	3a	Chm
2F-	-	BC850B	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhM
2F-	-	CHT2907APT	Si-pnp	AF, Sw, 60V, 600mA, B=100..300, 200MHz	SOT-23	16ta	-	3a	Chm
2F-	-	CHT4403PT	Si-pnp	AF, Sw, 40V, 600mA, B=100..300, 200MHz	SOT-23	16ta	-	3a	Chm
2F0	-	TC55RP252ECB	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
2F0	-	XC62FP2502M	LVR-IC	2.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
2F5	-	TC592502ECB	LVR-IC	LDO, -2.5V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
2F5	-	XC62KN252M	LVR-IC	LDO, -2.5V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
2FC2	-	81C25-P-AE3-2	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
2FC2G	-	81C25G-P-AE3-2	Vdet-IC	2.5V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
2FC2L	-	81C25L-P-AE3-2	Vdet-IC	2.5V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
2FC3	-	81C25-P-AE3-3	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
2FC3G	-	81C25G-P-AE3-3	Vdet-IC	2.5V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
2FC3L	-	81C25L-P-AE3-3	Vdet-IC	2.5V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
2FC5	-	81C25-P-AE3-5	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
2FC5G	-	81C25G-P-AE3-5	Vdet-IC	2.5V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
2FC5L	-	81C25L-P-AE3-5	Vdet-IC	2.5V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
2FN2	-	81N25-P-AE3-2	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
2FN2G	-	81N25G-P-AE3-2	Vdet-IC	2.5V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
2FN2L	-	81N25L-P-AE3-2	Vdet-IC	2.5V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
2FN3	-	81N25-P-AE3-3	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
2FN3G	-	81N25G-P-AE3-3	Vdet-IC	2.5V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
2FN3L	-	81N25L-P-AE3-3	Vdet-IC	2.5V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
2FN5	-	81N25-P-AE3-5	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
2FN5G	-	81N25G-P-AE3-5	Vdet-IC	2.5V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
2FN5L	-	81N25L-P-AE3-5	Vdet-IC	2.5V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2Fp	-	BC850B	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhH
2FQ	-	2SB1583-Q	Si-pnp	GP, 185V, 50mA, 200MHz, B=85..170	SOT-416	16ta	-	3a	Pan
2FR	-	2SB1583-R	Si-pnp	GP, 185V, 50mA, 200MHz, B=120..240	SOT-416	16ta	-	3a	Pan
2FR	-	2SB792A-R	Si-pnp	AF, LN, 185V, 50mA, 200mW, B=130..220, 200MHz	SC-59	16ta	-	3a	Pan
2Fs	-	BC850B	Si-npn	GP, 50V, 100mA, 330mW, B=200..450, 250MHz	SOT-23	16ta	-	3a	Sie
2Fs	-	BC850BT	Si-npn	GP, 50V, 100mA, 200mW, B=250, >100MHz	SOT-416	16ta	-	3a	Inf
2FS	-	2SB1583-S	Si-pnp	GP, 185V, 50mA, 200MHz, B=170..340	SOT-416	16ta	-	3a	Pan
2FS	-	2SB792A-S	Si-pnp	AF, LN, 185V, 50mA, 200mW, B=185..330, 200MHz	SC-59	16ta	-	3a	Pan
2Ft	-	BC850BW	Si-npn	GP, 50V, 100mA, 200mW, B=200..450, >100MHz	SOT-323	16ta	-	3a	PhM
2FW	-	BC850B	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhC
2FW	-	BC850BW	Si-npn	GP, 50V, 100mA, 200mW, B=200..450, >100MHz	SOT-323	16ta	-	3a	PhC
2FZ	-	BC850B	Si-npn	GP, 50V, 100mA, 330mW, B=200..450, >300MHz	SOT-23	16ta	-	3a	Zx
2G	-	BC850C	Si-npn	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	Cdi
2G	-	BC850CT	Si-npn	GP, 50V, 100mA, 200mW, B=480, >100MHz	SOT-416	16ta	-	3a	Phi
2G	-	BC850CW	Si-npn	GP, 50V, 100mA, 200mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	PhH
2G	-	CMBTA56	Si-pnp	AF-Drv, 80V, 500mA, 250mW, B>100, >50MHz	SOT-23	16ta	-	3a	Cdi
2G	-	FMMTA56	Si-pnp	AF-Drv, 80V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3a	Zx
2G	-	FT510Ga	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-23	16cq	VR1	3d	Fmd
2G	-	KST56	Si-pnp	AF-Drv, 80V, 500mA, 350mW, B>50, >50MHz	SOT-23	16ta	-	3a	Sam
2G	-	MMBTA56	Si-pnp	AF-Drv, 80V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3g	Vs
2G	-	R3131N22EA	Vdet-IC	2.2V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
2G	-	SMBTA56	Si-pnp	AF-Drv, 80V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3c	Inf
2G	-	TMPTA56	Si-pnp	AF-Drv, 80V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3a	All
-2G	-	PMSTA56	Si-pnp	AF-Drv, 80V, 500mA, 200mW, B>100, >50MHz	SOT-323	16ta	-	3a	PhH
2G-	-	BC850C	Si-npn	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhM
2GC2	-	81C26-P-AE3-2	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
2GC2G	-	81C26G-P-AE3-2	Vdet-IC	2.6V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
2GC2L	-	81C26L-P-AE3-2	Vdet-IC	2.6V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
2GC3	-	81C26-P-AE3-3	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
2GC3G	-	81C26G-P-AE3-3	Vdet-IC	2.6V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
2GC3L	-	81C26L-P-AE3-3	Vdet-IC	2.6V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
2GC5	-	81C26-P-AE3-5	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
2GC5G	-	81C26G-P-AE3-5	Vdet-IC	2.6V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
2GC5L	-	81C26L-P-AE3-5	Vdet-IC	2.6V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
2GM	-	MMBTA56	Si-pnp	AF-Drv, 80V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3a	Ons
2GN2	-	81N26-P-AE3-2	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
2GN2G	-	81N26G-P-AE3-2	Vdet-IC	2.6V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
2GN2L	-	81N26L-P-AE3-2	Vdet-IC	2.6V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
2GN3	-	81N26-P-AE3-3	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
2GN3G	-	81N26G-P-AE3-3	Vdet-IC	2.6V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
2GN3L	-	81N26L-P-AE3-3	Vdet-IC	2.6V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
2GN5	-	81N26-P-AE3-5	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
2GN5G	-	81N26G-P-AE3-5	Vdet-IC	2.6V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
2GN5L	-	81N26L-P-AE3-5	Vdet-IC	2.6V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
2Gp	-	BC850C	Si-npn	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhH
2Gs	-	BC850C	Si-npn	GP, 50V, 100mA, 330mW, B=420.-800, 250MHz	SOT-23	16ta	-	3a	Sie
2Gs	-	BC850CT	Si-npn	GP, 50V, 100mA, 200mW, B=480, >100MHz	SOT-416	16ta	-	3a	Inf
2Gt	-	BC850CW	Si-npn	GP, 50V, 100mA, 200mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	PhM
2GT	-	SOA56	Si-pnp	AF-Drv, 80V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3a	Ste
2GW	-	BC850C	Si-npn	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhC
2GW	-	BC850CW	Si-npn	GP, 50V, 100mA, 200mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	PhC
2H	-	BC850	Si-npn	GP, 50V, 100mA, 250mW, B=200..800, >100MHz	SOT-23	16ta	-	3a	Cdi
2H	-	CMBTA55	Si-pnp	AF-Drv, 60V, 500mA, 250mW, B>100, >50MHz	SOT-23	16ta	-	3a	Cdi
2H	-	FMMTA55	Si-pnp	AF-Drv, 60V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3a	Zx
2H	-	FT510Ha	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-23	16cq	VR1	3d	Fmd
2H	-	KST55	Si-pnp	GP, 60V, 500mA, 350mW, B>50, >50MHz	SOT-23	16ta	-	3a	Sam
2H	-	MMBTA55	Si-pnp	AF-Drv, 60V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3a	Ons
2H	-	R3131N32EA	Vdet-IC	3.2V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
2H	-	SMBTA55	Si-pnp	AF-Drv, 60V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3c	Inf
2H	-	TMPTA55	Si-pnp	AF-Drv, 60V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3a	All
-2H	-	PMSTA55	Si-pnp	AF-Drv, 60V, 500mA, 200mW, B>100, >50MHz	SOT-323	16ta	-	3a	PhH
2H0	-	TC55RP262ECB	LVR-IC	LDO, 2.6V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
2H0	-	XC62FP2602M	LVR-IC	2.6V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
2H5	-	TC592602ECB	LVR-IC	LDO, -2.6V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
2H5	-	XC62KN262M	LVR-IC	LDO, -2.6V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
2HC2	-	81C27-P-AE3-2	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
2HC2G	-	81C27G-P-AE3-2	Vdet-IC	2.7V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
2HC2L	-	81C27L-P-AE3-2	Vdet-IC	2.7V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
2HC3	-	81C27-P-AE3-3	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
2HC3G	-	81C27G-P-AE3-3	Vdet-IC	2.7V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2HC3L	-	81C27L-P-AE3-3	Vdet-IC	2.7V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
2HC5	-	81C27-P-AE3-5	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
2HC5G	-	81C27G-P-AE3-5	Vdet-IC	2.7V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
2HC5L	-	81C27L-P-AE3-5	Vdet-IC	2.7V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
2HN2	-	81N27-P-AE3-2	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
2HN2G	-	81N27G-P-AE3-2	Vdet-IC	2.7V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
2HN2L	-	81N27L-P-AE3-2	Vdet-IC	2.7V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
2HN3	-	81N27-P-AE3-3	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
2HN3G	-	81N27G-P-AE3-3	Vdet-IC	2.7V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
2HN3L	-	81N27L-P-AE3-3	Vdet-IC	2.7V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
2HN5	-	81N27-P-AE3-5	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
2HN5G	-	81N27G-P-AE3-5	Vdet-IC	2.7V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
2HN5L	-	81N27L-P-AE3-5	Vdet-IC	2.7V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
2Hp	-	BC850	Si-npn	GP, 50V, 100mA, 250mW, B=200..800, >100MHz	SOT-23	16ta	-	3a	PhH
2HT	-	SOA55	Si-pnp	AF-Drv, 80V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3a	Ste
2HW	-	BC850	Si-npn	GP, 50V, 100mA, 250mW, B=200..800, >100MHz	SOT-23	16ta	-	3a	PhC
2J	-	MMBT3640L	Si-pnp	HF, 12V, 80mA, 300mW, B=30..120, >500MHz	SOT-23	16ta	-	3a	Mot
2J	-	R3131N42EA	Vdet-IC	4.2V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
2JC2	-	81C28-P-AE3-2	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
2JC2G	-	81C28G-P-AE3-2	Vdet-IC	2.8V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
2JC2L	-	81C28L-P-AE3-2	Vdet-IC	2.8V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
2JC3	-	81C28-P-AE3-3	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
2JC3G	-	81C28G-P-AE3-3	Vdet-IC	2.8V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
2JC3L	-	81C28L-P-AE3-3	Vdet-IC	2.8V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
2JC5	-	81C28-P-AE3-5	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
2JC5G	-	81C28G-P-AE3-5	Vdet-IC	2.8V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
2JC5L	-	81C28L-P-AE3-5	Vdet-IC	2.8V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
2JN2	-	81N28-P-AE3-2	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
2JN2G	-	81N28G-P-AE3-2	Vdet-IC	2.8V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
2JN2L	-	81N28L-P-AE3-2	Vdet-IC	2.8V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
2JN3	-	81N28-P-AE3-3	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
2JN3G	-	81N28G-P-AE3-3	Vdet-IC	2.8V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
2JN3L	-	81N28L-P-AE3-3	Vdet-IC	2.8V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
2JN5	-	81N28-P-AE3-5	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
2JN5G	-	81N28G-P-AE3-5	Vdet-IC	2.8V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
2JN5L	-	81N28L-P-AE3-5	Vdet-IC	2.8V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
2K	-	BAT754	Si-diode	Schottky, Sw, U-Fst, 30V, 200mA, Vf<0.6V(0.1A), <0.3ns	SOT-23	16dc	-	3a	Phi
2K	-	DDZX22D	Z-diode	22V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
2K	-	FMMT4402	Si-pnp	AF, 40V, 600mA, 330mW, B=50..150, >150MHz	SOT-23	16ta	-	3a	Zx
2K	-	R3131N30EA8	Vdet-IC	3V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
2K0	-	TC55RP272ECB	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
2K0	-	XC62FP2702M	LVR-IC	2.7V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
2K5	-	TC592702ECB	LVR-IC	LDO, -2.7V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
2K5	-	XC62KN272M	LVR-IC	LDO, -2.7V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
2KC2	-	81C29-P-AE3-2	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
2KC2G	-	81C29G-P-AE3-2	Vdet-IC	2.9V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
2KC2L	-	81C29L-P-AE3-2	Vdet-IC	2.9V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
2KC3	-	81C29-P-AE3-3	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
2KC3G	-	81C29G-P-AE3-3	Vdet-IC	2.9V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
2KC3L	-	81C29L-P-AE3-3	Vdet-IC	2.9V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
2KC5	-	81C29-P-AE3-5	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
2KC5G	-	81C29G-P-AE3-5	Vdet-IC	2.9V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
2KC5L	-	81C29L-P-AE3-5	Vdet-IC	2.9V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
2KN2	-	81N29-P-AE3-2	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
2KN2G	-	81N29G-P-AE3-2	Vdet-IC	2.9V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
2KN2L	-	81N29L-P-AE3-2	Vdet-IC	2.9V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
2KN3	-	81N29-P-AE3-3	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
2KN3G	-	81N29G-P-AE3-3	Vdet-IC	2.9V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
2KN3L	-	81N29L-P-AE3-3	Vdet-IC	2.9V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
2KN5	-	81N29-P-AE3-5	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
2KN5G	-	81N29G-P-AE3-5	Vdet-IC	2.9V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
2KN5L	-	81N29L-P-AE3-5	Vdet-IC	2.9V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
2L	-	BAT754A	Si-diode	Dual, Schottky, Sw, U-Fst, 30V, 0.2A, Vf<0.6V(0.1A), <0.3ns	SOT-23	16df	-	3a	Phi
2L	-	FMMT4403	Si-pnp	AF, 40V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Zx
2L	-	KST5401	Si-pnp	Vid, 160V, 500mA, 350mW, B=60..240, >150MHz	SOT-23	16ta	-	3a	Sam
2L	-	MMBT5401	Si-pnp	HV, 160V, 200mA, 350mW, B=60..240, >100MHz	SOT-23	16ta	-	3a	Nsc
2L	-	R3131N26AC3	Vdet-IC	2.6V±1.5%, +Reset ODO, 50ms	SOT-23	16vdc	VD6	3b	Ric
2L	-	TMPT5401	Si-pnp	GP, 160V, 200mA, 350mW, B=60..240, >100MHz	SOT-23	16ta	-	3a	All
-2L	-	PMST5401	Si-pnp	HV, 160V, 300mA, 200mW, B=60..240, 100..300MHz	SOT-323	16ta	-	3a	PhH
2L0	-	TC55RP282ECB	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2L0	-	XC62FP2802M	LVR-IC	2.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
2L5	-	TC592802ECB	LVR-IC	LDO, -2.8V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
2L5	-	XC62KN282M	LVR-IC	LDO, -2.8V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
2m	-	FMMT5087	Si-pnp	AF, 50V, 100mA, 330mW, B=250..800, >40MHz	SOT-23	16ta	-	3a	Zx
2M	-	BAT754C	Si-diode	Dual, Schottky, Sw, U-Fst, 30V, 0.2A, Vf<0.6V(0.1A), <0.3ns	SOT-23	16dg	-	3a	Phi
2M	-	BC817-16	Si-npn	GP, 50V, 500mA, 350mW, B=100..250, >80MHz	SOT-23	16ta	-	3f	Kec
2M	-	BC817A-16	Si-npn	GP, 50V, 500mA, 350mW, B=100..250, >80MHz	SOT-23	16ta	-	3f	Kec
2M	-	DDZX27D	Z-diode	27V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
2M	-	PDTA144TEF	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=47k	SOT-490	18ta	-	3a	Nxp
2M	-	R3131N26BC3	Vdet-IC	2.6V±1.5%, +Reset ODO, 100ms	SOT-23	16vdc	VD6	3b	Ric
2M0	-	TC55RP292ECB	LVR-IC	LDO, 2.9V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
2M0	-	XC62FP2902M	LVR-IC	2.9V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
2M5	-	TC592902ECB	LVR-IC	LDO, -2.9V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
2M5	-	XC62KN292M	LVR-IC	LDO, -2.9V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
2N	-	BAT754S	Si-diode	Dual, Schottky, Sw, U-Fst, 30V, 0.2A, Vf<0.6V(0.1A), <0.3ns	SOT-23	16dl	-	3a	Phi
2N	-	BC817-25	Si-npn	GP, 50V, 500mA, 350mW, B=160..400, >80MHz	SOT-23	16ta	-	3f	Kec
2N	-	BC817A-25	Si-npn	GP, 50V, 500mA, 350mW, B=160..400, >80MHz	SOT-23	16ta	-	3f	Kec
2N	-	DDZX30D	Z-diode	30V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
2N	-	MMBT404A	Si-pnp	Chopper, 40V, 150mA, 225mW, B=100..400, 180ns	SOT-23	16ta	-	3a	Mot
2N	-	R3131N26DC3	Vdet-IC	2.6V±1.5%, +Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Ric
2N0	-	ZXT11N20DFTA	Si-npn	Lo-sat, Sw, 40V, 2.5A, 625mW, B=200..900, 160MHz	SOT-23	16ta	-	3a	Zx
2N0	-	ZXT11N20DFTC	Si-npn	Lo-sat, Sw, 40V, 2.5A, 625mW, B=200..900, 160MHz	SOT-23	16ta	-	3a	Zx
2NQ	-	2SD1478-Q	Si-npn-Darl	AF-Amp, 60V, 500mA, 200mW, 200MHz, B=4000..10000	SC-59	16ta	-	3a	Pan
2NR	-	2SD1478-R	Si-npn-Darl	AF-Amp, 60V, 500mA, 200mW, 200MHz, B=8000..20000	SC-59	16ta	-	3a	Pan
2OQ	-	2SD1478A-Q	Si-npn-Darl	AF-Amp, 50V, 500mA, 200mW, 200MHz, B=4000..10000	SC-59	16ta	-	3a	Pan
2OR	-	2SD1478A-R	Si-npn-Darl	AF-Amp, 50V, 500mA, 200mW, 200MHz, B=8000..20000	SC-59	16ta	-	3a	Pan
2P	-	BC817-40	Si-npn	GP, 50V, 500mA, 350mW, B=250..630, >80MHz	SOT-23	16ta	-	3f	Kec
2P	-	BC817A-40	Si-npn	GP, 50V, 500mA, 350mW, B=250..630, >80MHz	SOT-23	16ta	-	3f	Kec
2P	-	FMMT2222R	Si-npn	GP, 60V, 600mA, 330mW, B=120..360, >250MHz	SOT-23	16ta	-	3a	Zx
2P	-	KST5086	Si-pnp	GP, 50V, 50mA, 350mW, B=150..500, >40MHz	SOT-23	16ta	-	3a	Sam
2P	-	MMBT5086	Si-npn	GP, 50V, 50mA, 350mW, B=150..500, >40MHz	SOT-23	16ta	-	3a	Mot
2P	-	R3131N26HC3	Vdet-IC	2.6V±1.5%, +Reset ODO, 400ms	SOT-23	16vdc	VD6	3b	Ric
2P	-	TMPT5086	Si-pnp	GP, 50V, 50mA, 350mW, B=150..500, >40MHz	SOT-23	16ta	-	3a	All
2Q	-	FMMT5209	Si-npn	GP, 50V, 50mA, 330mW, B=100..300, >30MHz	SOT-23	16ta	-	3a	Zx
2Q	-	KST5087	Si-pnp	GP, 50V, 50mA, 350mW, B=250..800, >40MHz	SOT-23	16ta	-	3a	Sam
2Q	-	R3131N26AA3	Vdet-IC	2.6V±1.5%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3b	Ric
2Q	-	TMPT5087	Si-pnp	GP, 50V, 50mA, 350mW, B=250..800, >40MHz	SOT-23	16ta	-	3a	All
2R	-	2SC5632	Si-npn	HF, Sw, 15V, 50mA, 150mW, 1.1GHz, B=100..350	SMini3-G1	16ta	-	3a	Pan
2R	-	FMMT5210	Si-npn	GP, 50V, 50mA, 330mW, B=200..600, >30MHz	SOT-23	16ta	-	3a	Zx
2R	-	R3131N26BA3	Vdet-IC	2.6V±1.5%, +Reset PPO, 100ms	SOT-23	16vdc	VD7	3b	Ric
2R	-	SRA2202E	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10k/10k	SOT-523	16ta	-	3a	Auk
2R	-	SRA2202EF	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10k/10k	SOT-523F	18ta	-	3a	Auk
2R	-	SRA2202U	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-323	16ta	-	3a	Auk
2R	-	SRA2202UF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-323F	18ta	-	3a	Auk
2S	-	2SD5654	Si-npn	DC/DC-Conv, 20V, 1A, 150mW, B=160..560, 180MHz	SOT-323	16ta	-	3a	Pan
2S	-	R3131N26DA3	Vdet-IC	2.6V±1.5%, +Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Ric
2T	-	HT2	Si-npn	GP, 90V, 100mA, 300mW, <500/2000ns	SOT-23	16ta	-	3a	Fer
2T	-	KST4403	Si-pnp	GP, 60V, 600mA, 350mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Sam
2T	-	MMBT4403	Si-pnp	GP, 40V, 800mA, 200mW, B= 100..300, >200MHz	SOT-23	16ta	-	3g	Vs
2T	-	MMBT4403T	Si-pnp	GP, 40V, 800mA, 200mW, B= 100..300, >200MHz	SOT-23	16ta	-	3d	Di
2T	-	R3131N26HA3	Vdet-IC	2.6V±1.5%, +Reset PPO, 400ms	SOT-23	16vdc	VD7	3b	Ric
2T	-	SO4403	Si-pnp	GP, 40V, 600mA, 225mW, B=30..100, 200MHz	SOT-23	16ta	-	3a	Ste
2T	-	TMPT4403	Si-pnp	GP, 40V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	All
2T	-	YTS4403	Si-pnp	GP, 40V, 600mA, 225mW, B=30..100, 200MHz	SOT-23	16ta	-	3a	Tos
-2T	-	PMST4403	Si-pnp	GP, 40V, 600mA, 200mW, B=100..300, >200MHz	SOT-323	16ta	-	3a	PhH
2T‾	-	GMBT4403	Si-pnp	GP, 40V, 600mA, 225mW, B=30..100, 200MHz	SOT-23	16ta	-	3a	Gtm
2T1H	-	S9012LT1-H	Si-pnp	GP, 40V, 500mA, 300mW, B=200..350, >150MHz	SOT-23	16ta	-	3a	Wtr
2T1L	-	S9012LT1-L	Si-pnp	GP, 40V, 500mA, 300mW, B=120..200, >150MHz	SOT-23	16ta	-	3a	Wtr
2U	-	KST63	Si-npn-Darl	GP, 30V, 500mA, 350mW, B>6000, >125MHz	SOT-23	16ta	-	3a	Sam
2U	-	MMBTA63	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>5000, >125MHz	SOT-23	16ta	-	3a	Mot
2U	-	SMBTA63	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>5000, >125MHz	SOT-23	16ta	-	3c	Inf
2V	-	KST64	Si-npn-Darl	GP, 30V, 500mA, 350mW, B>10000, >125MHz	SOT-23	16ta	-	3a	Sam
2V	-	MMBTA64	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>10000, >125MHz	SOT-23	16ta	-	3a	Mot
2V	-	SMBTA64	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>10000, >125MHz	SOT-23	16ta	-	3c	Inf
2V4	-	PZM2.4NB	Z-diode	2.4V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
2V7	-	PZM2.7NB	Z-diode	2.7V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
2VR	-	2SD2623-R	Si-npn	AF, 25V, 500mA, 250mW, B=200..350, 200MHz	SOT-323	16ta	-	3a	Pan
2VS	-	2SD2623-S	Si-npn	AF, 25V, 500mA, 250mW, B=300..500, 200MHz	SOT-323	16ta	-	3a	Pan
2VT	-	2SD2623-T	Si-npn	AF, 25V, 500mA, 250mW, B=400..800, 200MHz	SOT-323	16ta	-	3a	Pan
2W	-	2SC3704	Si-npn	UHF, LN, 15V, 80mA, 200mW, B=50..300, 6GHz	SC-59	16ta	-	3a	Pan





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2W	-	2SC3937	Si-npn	UHF, 15V, 80mA, 150mW, B=80..250, 6GHz	SOT-323	16ta	-	3a	Pan
2W	-	FMMT3905	Si-pnp	GP, 40V, 200mA, 330mW, B=50..150, >200MHz	SOT-23	16ta	-	3a	Zx
2W	-	MMBT8599	Si-pnp	GP, 80V, 500mA, 300mW, B=100..300, >150MHz	SOT-23	16ta	-	3a	Mot
2W	-	RT1A3906	Si-pnp	AF, 60V, 200mA, 150mW, 250MHz, B=100..300	SC-59	16ta	-	3a	Mit
2W	-	TMPT4402	Si-pnp	GP, 40V, 600mA, 330mW, B=50..150, >150MHz	SOT-23	16ta	-	3a	All
2X	-	2SC3707	Si-npn	UHF, 10V, 10mA, 50mW, B=50..150, 4GHz	SC-59	16ta	-	3a	Pan
2X	-	2SC4410	Si-npn	UHF, 10V, 10mA, 50mW, B=50..200, 4GHz	SOT-323	16ta	-	3a	Pan
2X	-	KST4401	Si-npn	GP, 60V, 600mA, 350mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Sam
2X	-	MMBT4401	Si-npn	GP, 60V, 600mA, 225mW, B=100..300, 250MHz	SOT-23	16ta	-	3a	Vs
2X	-	MMBT4401T	Si-npn	GP, 60V, 600mA, 225mW, B=100..300, 250MHz	SOT-523	16ta	-	3c	Di
2X	-	MMBT4401W	Si-npn	GP, 60V, 600mA, 225mW, B=100..300, 250MHz	SOT-323	16ta	-	3b	Ons
2X	-	MMBT4401W	Si-npn	GP, 60V, 600mA, 225mW, B=100..300, 250MHz	SOT-323	16ta	-	3c	Sec
2X	-	SO4401	Si-npn	GP, 60V, 800mA, 200mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Ste
2X	-	TMPT4401	Si-npn	GP, 60V, 600mA, 350mW, B=100..300, >25MHz	SOT-23	16ta	-	3a	All
-2X	-	PMST4401	Si-npn	Sw, 60V, 600mA, 200mW, B=100..300, >250MHz	SOT-323	16ta	-	3a	PhH
2XG	-	MMBT4401G-AE3	Si-npn	GP, 60V, 600mA, 225mW, B=100..300, 250MHz	SOT-23	16ta	-	3a	Utc
2XG	-	MMBT4401G-AL3	Si-npn	GP, 60V, 600mA, 225mW, B=100..300, 250MHz	SOT-323	16ta	-	3a	Utc
2XK	-	MMBT4401K	Si-npn	GP, 60V, 600mA, 350mW, B=100..300, 250MHz	SOT-23	16ta	-	3a	F
2XL	-	MMBT4401L-AE3	Si-npn	GP, 60V, 600mA, 225mW, B=100..300, 250MHz	SOT-23	16ta	-	3a	Utc
2XL	-	MMBT4401L-AL3	Si-npn	GP, 60V, 600mA, 225mW, B=100..300, 250MHz	SOT-323	16ta	-	3a	Utc
2Y	-	CMBT3905	Si-npn	GP, 40V, 200mA, 250mW, B=50..150, >200MHz	SOT-23	16ta	-	3a	Cdi
2YQ	-	2SC3757-Q	Si-npn	Sw, Hi-speed, 15V, 50mA, 200mW, B=50..120, 1.5GHz	SC-59	16ta	-	3a	Pan
2YQ	-	2SC3938-Q	Si-npn	Sw, Hi-Sp, 40V, 300mA, 150mW, B=60..120, 450MHz	SOT-323	16ta	-	3a	Pan
2YQ	-	2SC4691J-Q	Si-npn	Sw, 40V, 100mA, 125mW, 450MHz, B=60..120	SC-89	18ta	-	3a	Pan
2YQ	-	2SC4691-Q	Si-npn	Sw, 40V, 300mA, 125mW, 450MHz, B=60..120	SOT-416	16ta	-	3a	Pan
2YR	-	2SC3757-R	Si-npn	Sw, Hi-speed, 15V, 50mA, 200mW, B=90..150, 1.5GHz	SC-59	16ta	-	3a	Pan
2YR	-	2SC3938-R	Si-npn	Sw, Hi-Sp, 40V, 300mA, 150mW, B=90..200, 450MHz	SOT-323	16ta	-	3a	Pan
2YR	-	2SC4691J-R	Si-npn	Sw, 40V, 100mA, 125mW, 450MHz, B=90..200	SC-89	18ta	-	3a	Pan
2YR	-	2SC4691-R	Si-npn	Sw, 40V, 300mA, 125mW, 450MHz, B=90..200	SOT-416	16ta	-	3a	Pan
2YS	-	2SC3757-S	Si-npn	Sw, Hi-speed, 15V, 50mA, 200mW, B=120..240, 1.5GHz	SC-59	16ta	-	3a	Pan
2Z	-	2SC4417	Si-npn	IF-TV, 45V, 50mA, 150mW, B=20..100, 200MHz	SOT-323	16ta	-	3a	Pan
2Z	-	MMBT6520	Si-pnp	Vid, 350V, 250mA, 225mW, B=20..200, <200MHz	SOT-23	16ta	-	3a	Mot
2Z5	-	BAS70-05	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dg	-	3a	Zx
3	cr	ELM7518NEB	Vdet-IC	1.8V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
3	cs	ELM7518CEB	Vdet-IC	1.8V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
3.0H	-	MAZ3030-H	Z-diode	2.8..3.2V, If=100mA, Zzt=120Ω, 200mW	SC-59	16dc	-	3a	Pan
3.0L	-	MAZ3030-L	Z-diode	2.8..3.2V, If=100mA, Zzt=120Ω, 200mW	SC-59	16dc	-	3a	Pan
3.3G	-	ZD3.3G-AE3	Z-diode	3.3V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
3.3H	-	MAZ3033-H	Z-diode	3.1..3.5V, If=100mA, Zzt=130Ω, 200mW	SC-59	16dc	-	3a	Pan
3.3L	-	MAZ3033-L	Z-diode	3.1..3.5V, If=100mA, Zzt=130Ω, 200mW	SC-59	16dc	-	3a	Pan
3.3L	-	ZD3.3L-AE3	Z-diode	3.3V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
3.6H	-	MAZ3036-H	Z-diode	3.4..3.8V, If=100mA, Zzt=130Ω, 200mW	SC-59	16dc	-	3a	Pan
3.6L	-	MAZ3036-L	Z-diode	3.4..3.8V, If=100mA, Zzt=130Ω, 200mW	SC-59	16dc	-	3a	Pan
3.9G	-	ZD3.9G-AE3	Z-diode	3.9V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
3.9H	-	MAZ3039-H	Z-diode	3.7..4.1V, If=100mA, Zzt=130Ω, 200mW	SC-59	16dc	-	3a	Pan
3.9L	-	MAZ3039-L	Z-diode	3.7..4.1V, If=100mA, Zzt=130Ω, 200mW	SC-59	16dc	-	3a	Pan
3.9L	-	ZD3.9L-AE3	Z-diode	3.9V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
3•0X	-	02CZ3.0-X	Z-diode	2.8..3.05V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
3•0Z	-	02CZ3.0-Z	Z-diode	2.95..3.2V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
3•3X	-	02CZ3.3-X	Z-diode	3.1..3.35V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
3•3Z	-	02CZ3.3-Z	Z-diode	3.25..3.5V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
3•6X	-	02CZ3.6-X	Z-diode	3.4..3.65V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
3•6Z	-	02CZ3.6-Z	Z-diode	3.55..3.8V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
3•9X	-	02CZ3.9-X	Z-diode	3.7..3.97V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
3•9Z	-	02CZ3.9-Z	Z-diode	3.87..4.1V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
30	-	ELM9730NBB	Vdet-IC	3.0V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
30	-	ELM9830BB	LVR-IC	3.0V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
30	-	TZT3.0W	Z-diode	2.80..3.20V, Izt=5mA, Zzt=120Ω, 200mW	SOT-23	16dc	-	3a	Ttr
30	-	Z02W3.0V	Z-diode	2.80..3.20V, Izt=5mA, Zzt=120Ω, 200mW	SOT-23	16dc	-	3f	Kec
30-	ca	HZM30NB	Z-diode	28..32V, Izt=2mA, 200mW	SC-59A	16dc	-	3a	Ren
300	-	HZM3.0NB	Z-diode	2.8..3.2V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
300AC	-	BL8509-300ACRM	Vdet-IC	3.0V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
300AC	-	LC9009CB3TR300AC	Vdet-IC	3.0V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
300AN	-	BL8509-300ANRM	Vdet-IC	3.0V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
300AN	-	LC9009CB3TR300AN	Vdet-IC	3.0V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
300BC	-	BL8509-300BCRM	Vdet-IC	3.0V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
300BC	-	LC9009CB3TR300BC	Vdet-IC	3.0V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
300BN	-	BL8509-300BNRM	Vdet-IC	3.0V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
300BN	-	LC9009CB3TR300BN	Vdet-IC	3.0V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
300CC	-	BL8509-300CCRM	Vdet-IC	3.0V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
300CC	-	LC9009CB3TR300CC	Vdet-IC	3.0V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
300CN	-	BL8509-300CNRM	Vdet-IC	3.0V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
300CN	-	LC9009CB3TR300CN	Vdet-IC	3.0V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
300DC	-	BL8509-300DCRM	Vdet-IC	3.0V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
300DC	-	LC9009CB3TR300DC	Vdet-IC	3.0V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
300DN	-	BL8509-300DNRM	Vdet-IC	3.0V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
300DN	-	LC9009CB3TR300DN	Vdet-IC	3.0V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
300EC	-	BL8509-300ECRM	Vdet-IC	3.0V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
300EC	-	LC9009CB3TR300EC	Vdet-IC	3.0V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
300EN	-	BL8509-300ENRM	Vdet-IC	3.0V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
300EN	-	LC9009CB3TR300EN	Vdet-IC	3.0V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
300FC	-	BL8509-300FCRM	Vdet-IC	3.0V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
300FC	-	LC9009CB3TR300FC	Vdet-IC	3.0V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
300FN	-	BL8509-300FNRM	Vdet-IC	3.0V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
300FN	-	LC9009CB3TR300FN	Vdet-IC	3.0V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
300GC	-	BL8509-300GCRM	Vdet-IC	3.0V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
300GC	-	LC9009CB3TR300GC	Vdet-IC	3.0V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
300GN	-	BL8509-300GNRM	Vdet-IC	3.0V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
300GN	-	LC9009CB3TR300GN	Vdet-IC	3.0V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
301	-	HZM3.0NB1	Z-diode	2.8..3.05V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
301	-	PZM3.0NB1	Z-diode	3.0V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
302	-	HZM3.0NB2	Z-diode	2.95..3.2V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
302	-	PZM3.0NB2	Z-diode	3.0V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
30-2	-	UTC8130-2	Vdet-IC	3.0V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
3025	-	LC3030CB3TR25	DC-DC-IC	PFM, step-up, 2.5V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3026	-	LC3030CB3TR26	DC-DC-IC	PFM, step-up, 2.6V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3027	-	LC3030CB3TR27	DC-DC-IC	PFM, step-up, 2.7V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3028	-	LC3030CB3TR28	DC-DC-IC	PFM, step-up, 2.8V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3029	-	LC3030CB3TR29	DC-DC-IC	PFM, step-up, 2.9V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
30-3	-	UTC8130-3	Vdet-IC	3.0V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
3030	-	LC3030CB3TR30	DC-DC-IC	PFM, step-up, 3.0V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3031	-	LC3030CB3TR31	DC-DC-IC	PFM, step-up, 3.1V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3032	-	LC3030CB3TR32	DC-DC-IC	PFM, step-up, 3.2V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3033	-	LC3030CB3TR33	DC-DC-IC	PFM, step-up, 3.3V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3034	-	LC3030CB3TR34	DC-DC-IC	PFM, step-up, 3.4V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3035	-	LC3030CB3TR35	DC-DC-IC	PFM, step-up, 3.5V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3036	-	LC3030CB3TR36	DC-DC-IC	PFM, step-up, 3.6V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3037	-	LC3030CB3TR37	DC-DC-IC	PFM, step-up, 3.7V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3038	-	LC3030CB3TR38	DC-DC-IC	PFM, step-up, 3.8V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3039	-	LC3030CB3TR39	DC-DC-IC	PFM, step-up, 3.9V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3040	-	LC3030CB3TR40	DC-DC-IC	PFM, step-up, 4.0V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3041	-	LC3030CB3TR41	DC-DC-IC	PFM, step-up, 4.1V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3042	-	LC3030CB3TR42	DC-DC-IC	PFM, step-up, 4.2V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3043	-	LC3030CB3TR43	DC-DC-IC	PFM, step-up, 4.3V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3044	-	LC3030CB3TR44	DC-DC-IC	PFM, step-up, 4.4V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3045	-	LC3030CB3TR45	DC-DC-IC	PFM, step-up, 4.5V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3046	-	LC3030CB3TR46	DC-DC-IC	PFM, step-up, 4.6V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3047	-	LC3030CB3TR47	DC-DC-IC	PFM, step-up, 4.7V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3048	-	LC3030CB3TR48	DC-DC-IC	PFM, step-up, 4.8V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3049	-	LC3030CB3TR49	DC-DC-IC	PFM, step-up, 4.9V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
305	-	AT-30533	Si-npn	UHF, 11V, 8mA, 100mW, B=70..300, 10GHz	SOT-23	16ta	-	3a	Agi
30-5	-	UTC8130-5	Vdet-IC	3.0V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
3050	-	LC3030CB3TR50	DC-DC-IC	PFM, step-up, 5.0V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3051	-	LC3030CB3TR51	DC-DC-IC	PFM, step-up, 5.1V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3052	-	LC3030CB3TR52	DC-DC-IC	PFM, step-up, 5.2V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3053	-	LC3030CB3TR53	DC-DC-IC	PFM, step-up, 5.3V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3054	-	LC3030CB3TR54	DC-DC-IC	PFM, step-up, 5.4V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3055	-	LC3030CB3TR55	DC-DC-IC	PFM, step-up, 5.5V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3056	-	LC3030CB3TR56	DC-DC-IC	PFM, step-up, 5.6V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3057	-	LC3030CB3TR57	DC-DC-IC	PFM, step-up, 5.7V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3058	-	LC3030CB3TR58	DC-DC-IC	PFM, step-up, 5.8V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3059	-	LC3030CB3TR59	DC-DC-IC	PFM, step-up, 5.9V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
3060	-	LC3030CB3TR60	DC-DC-IC	PFM, step-up, 6.0V±2%, 200mA	SOT-23	16bq	DC2	3a	Lch
309L	-	CMPT3090L	Si-npn	GP, Pow, 45V, 5A, 350mW, B>100, >100MHz	SOT-23F	18ta	-	3a	Cen
30A	-	AAT60030A-S2	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
30A	-	TZT30W	Z-diode	29.19..30.69V, Izt=2.0mA, 200mW	SOT-23	16dc	-	3a	Ttr
30B	-	AAT60030B-S2	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
30B	-	BZX84C30-V	Z-diode	29.19..30.69V, Izt=2mA, Zzt=200Ω, 300mW	SOT-23	16dc	-	3f	Kec
30B	-	MMBZ5230BPT	Z-diode	4.465..4.935V, Izt=5mA, Zzt=70Ω, 225mW	SOT-23	16dc	-	3a	Chm
30C	-	AAT60030C-S2	Vdet-IC	3.0V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
30D	-	AAT60030D-S2	Vdet-IC	3.0V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
30G	-	ZD30G-AE3	Z-diode	30V±5%, Zzt=200Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
30H	-	BZX84C3V0-V	Z-diode	2.80..3.20V, Izt=5mA, Zzt=120Ω, 300mW	SOT-23	16dc	-	3f	Kec
30H	-	MAZ3300-H	Z-diode	28..32V, If=100mA, Zzt=80Ω, 200mW	SC-59	16dc	-	3a	Pan
30L	-	MAZ3300-L	Z-diode	28..32V, If=100mA, Zzt=80Ω, 200mW	SC-59	16dc	-	3a	Pan
30L	-	ZD30L-AE3	Z-diode	30V±5%, Zzt=200Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
30M	-	MAZ3300-M	Z-diode	28..32V, If=100mA, Zzt=80Ω, 200mW	SC-59	16dc	-	3a	Pan
30N	-	STM1061N30W	Vdet-IC	3.0V±2%, -Reset ODO	SOT-323	16vda	VD6	3d	Ste
30N	-	STM1061N30WX	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Ste
30S	-	MMBZ5230SPT	Z-diode	4.606..4.794V, Izt=5mA, Zzt=70Ω, 225mW	SOT-23	16dc	-	3a	Chm
30S	-	MMCZ5230SPT	Z-diode	4.606..4.794V, Izt=5mA, Zzt=70Ω, 225mW	SOT-346	16dc	-	3a	Chm
30T	-	TK71530AS	LVR-IC	LDO, 3.0V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
30V	-	CHPZ30VPT	Z-diode	Dual, 28.0..32.0V, Izt=2mA, Zzt=80Ω, 350mW	SOT-23	16df	-	3a	Chm
30V	-	PZM30NB	Z-diode	30V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
30V	-	PZM30NB1	Z-diode	30V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
30X	-	TZT3.0XW	Z-diode	2.80..3.05V, Izt=5mA, Zzt=120Ω, 200mW	SOT-23	16dc	-	3a	Ttr
30X	-	Z02W3.0VX	Z-diode	2.80..3.05V, Izt=5mA, Zzt=120Ω, 200mW	SOT-23	16dc	-	3f	Kec
30Z	-	02CZ30Z	Z-diode	28.0..32.0V, Izt=2mA, 200mW	SC-59	16dc	-	3a	Tos
30Z	-	CZ1W30	Z-diode	30V±5%, Izt=8.5mA, 600mW	SOT-23	16dc	-	3a	Cdi
30Z	-	TZT3.0ZW	Z-diode	2.95..3.20V, Izt=5mA, Zzt=120Ω, 200mW	SOT-23	16dc	-	3a	Ttr
30Z	-	Z02W3.0VZ	Z-diode	2.95..3.20V, Izt=5mA, Zzt=120Ω, 200mW	SOT-23	16dc	-	3f	Kec
31	-	2SC5663PT	Si-npn	AF, Sw, 12V, 500mA, B=270..680, 320MHz	SOT-723	18ta	-	3a	Chm
31	-	2SC5663TPT	Si-npn	AF, Sw, 12V, 500mA, B=270..680, 320MHz	SOT-416	16ta	-	3a	Chm
31	-	ELM9731NBB	Vdet-IC	3.1V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
31	-	ELM9831BB	LVR-IC	3.1V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
31	-	PDTA124XE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=22k/47k	SOT-416	16ta	-	3a	Nxp
31	-	PDTA124XEF	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k	SOT-490	18ta	-	3a	Nxp
31	-	PDTC123YK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/10k	SC-59	16ta	-	3a	Nxp
-31	-	PDTA143XT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k	SOT-23	16ta	-	3a	NxH
310	-	AT-31033	Si-npn	UHF, 11V, 16mA, 0.15W, B=70..300, 10GHz	SOT-23	16ta	-	3a	Agi
310AC	-	BL8509-310ACRM	Vdet-IC	3.1V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
310AC	-	LC9009CB3TR310AC	Vdet-IC	3.1V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
310AN	-	BL8509-310ANRM	Vdet-IC	3.1V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
310AN	-	LC9009CB3TR310AN	Vdet-IC	3.1V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
310BC	-	BL8509-310BCRM	Vdet-IC	3.1V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
310BC	-	LC9009CB3TR310BC	Vdet-IC	3.1V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
310BN	-	BL8509-310BNRM	Vdet-IC	3.1V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
310BN	-	LC9009CB3TR310BN	Vdet-IC	3.1V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
310CC	-	BL8509-310CCRM	Vdet-IC	3.1V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
310CC	-	LC9009CB3TR310CC	Vdet-IC	3.1V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
310CN	-	BL8509-310CNRM	Vdet-IC	3.1V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
310CN	-	LC9009CB3TR310CN	Vdet-IC	3.1V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
310DC	-	BL8509-310DCRM	Vdet-IC	3.1V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
310DC	-	LC9009CB3TR310DC	Vdet-IC	3.1V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
310DN	-	BL8509-310DNRM	Vdet-IC	3.1V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
310DN	-	LC9009CB3TR310DN	Vdet-IC	3.1V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
310EC	-	BL8509-310ECRM	Vdet-IC	3.1V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
310EC	-	LC9009CB3TR310EC	Vdet-IC	3.1V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
310EN	-	BL8509-310ENRM	Vdet-IC	3.1V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
310EN	-	LC9009CB3TR310EN	Vdet-IC	3.1V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
310FC	-	BL8509-310FCRM	Vdet-IC	3.1V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
310FC	-	LC9009CB3TR310FC	Vdet-IC	3.1V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
310FN	-	BL8509-310FNRM	Vdet-IC	3.1V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
310FN	-	LC9009CB3TR310FN	Vdet-IC	3.1V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
310GC	-	BL8509-310GCRM	Vdet-IC	3.1V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
310GC	-	LC9009CB3TR310GC	Vdet-IC	3.1V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
310GN	-	BL8509-310GNRM	Vdet-IC	3.1V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
310GN	-	LC9009CB3TR310GN	Vdet-IC	3.1V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
31-2	-	UTC8131-2	Vdet-IC	3.1V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
31-3	-	UTC8131-3	Vdet-IC	3.1V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
315A	-	AP8853-15A	LVR-IC	LDO, 1.5V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
315AG	-	AP8853-15GA	LVR-IC	LDO, 1.5V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
315B	-	AP8853-15B	LVR-IC	LDO, 1.5V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
315BG	-	AP8853-15GB	LVR-IC	LDO, 1.5V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
315C	-	AP8853-15C	LVR-IC	LDO, 1.5V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
315C	-	FS8853-15GC	LVR-IC	LDO, 1.5V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
315CG	-	AP8853-15GC	LVR-IC	LDO, 1.5V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
315V	-	AP8853-15V	LVR-IC	LDO, 1.5V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
315VG	-	AP8853-15GV	LVR-IC	LDO, 1.5V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
316A	-	AP8853-16A	LVR-IC	LDO, 1.6V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
316AG	-	AP8853-16GA	LVR-IC	LDO, 1.6V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
316B	-	AP8853-16B	LVR-IC	LDO, 1.6V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
316BG	-	AP8853-16GB	LVR-IC	LDO, 1.6V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
316C	-	AP8853-16C	LVR-IC	LDO, 1.6V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
316C	-	FS8853-16GC	LVR-IC	LDO, 1.6V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
316CG	-	AP8853-16GC	LVR-IC	LDO, 1.6V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
316V	-	AP8853-16V	LVR-IC	LDO, 1.6V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
316VG	-	AP8853-16GV	LVR-IC	LDO, 1.6V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
317A	-	AP8853-17A	LVR-IC	LDO, 1.7V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
317AG	-	AP8853-17GA	LVR-IC	LDO, 1.7V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
317B	-	AP8853-17B	LVR-IC	LDO, 1.7V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
317BG	-	AP8853-17GB	LVR-IC	LDO, 1.7V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
317C	-	AP8853-17C	LVR-IC	LDO, 1.7V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
317C	-	FS8853-17GC	LVR-IC	LDO, 1.7V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
317CG	-	AP8853-17GC	LVR-IC	LDO, 1.7V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
317V	-	AP8853-17V	LVR-IC	LDO, 1.7V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
317VG	-	AP8853-17GV	LVR-IC	LDO, 1.7V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
318A	-	AP8853-18A	LVR-IC	LDO, 1.8V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
318AG	-	AP8853-18GA	LVR-IC	LDO, 1.8V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
318B	-	AP8853-18B	LVR-IC	LDO, 1.8V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
318BG	-	AP8853-18GB	LVR-IC	LDO, 1.8V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
318C	-	AP8853-18C	LVR-IC	LDO, 1.8V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
318C	-	FS8853-18GC	LVR-IC	LDO, 1.8V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
318CG	-	AP8853-18GC	LVR-IC	LDO, 1.8V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
318V	-	AP8853-18V	LVR-IC	LDO, 1.8V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
318VG	-	AP8853-18GV	LVR-IC	LDO, 1.8V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
319A	-	AP8853-19A	LVR-IC	LDO, 1.9V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
319AG	-	AP8853-19GA	LVR-IC	LDO, 1.9V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
319B	-	AP8853-19B	LVR-IC	LDO, 1.9V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
319BG	-	AP8853-19GB	LVR-IC	LDO, 1.9V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
319C	-	AP8853-19C	LVR-IC	LDO, 1.9V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
319C	-	FS8853-19GC	LVR-IC	LDO, 1.9V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
319CG	-	AP8853-19GC	LVR-IC	LDO, 1.9V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
319V	-	AP8853-19V	LVR-IC	LDO, 1.9V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
319VG	-	AP8853-19GV	LVR-IC	LDO, 1.9V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
31A	-	AAT60031A-S2	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
31-A	-	UTC8131-5	Vdet-IC	3.1V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
31B	-	AAT60031B-S2	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
31B	-	MMBZ5231BPT	Z-diode	4.845..5.355V, Izt=5mA, Zzt=50Ω, 225mW	SOT-23	16dc	-	3a	Chm
31C	-	AAT60031C-S2	Vdet-IC	3.1V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
31D	-	AAT60031D-S2	Vdet-IC	3.1V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
31N	-	STM1061N31W	Vdet-IC	3.1V±2%, -Reset ODO	SOT-323	16vda	VD6	3d	Ste
31N	-	STM1061N31WX	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Ste
31p	-	BFR505	Si-npn	RF, SATV, 20V, 18mA, 150mW, B=60..250, 9GHz	SOT-23	16ta	-	3a	NxH
31S	-	MMBZ5231SPT	Z-diode	4.998..5.202V, Izt=5mA, Zzt=50Ω, 225mW	SOT-23	16dc	-	3a	Chm
31S	-	MMCZ5231SPT	Z-diode	4.998..5.202V, Izt=5mA, Zzt=50Ω, 225mW	SOT-346	16dc	-	3a	Chm
31t	-	BFR505	Si-npn	RF, SATV, 20V, 18mA, 150mW, B=60..250, 9GHz	SOT-23	16ta	-	3a	NxM
31T	-	TK71531AS	LVR-IC	LDO, 3.1V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
31W	-	BFR505	Si-npn	RF, SATV, 20V, 18mA, 150mW, B=60..250, 9GHz	SOT-23	16ta	-	3a	NxC
32	-	CH3904MPT	Si-npn	AF, Sw, 40V, 200mA, B=100..300, 300MHz	SOT-723	18ta	-	3a	Chm
32	-	ELM9732NBB	Vdet-IC	3.2V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
32	-	ELM9832BB	LVR-IC	3.2V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
32	-	PDTC124XE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=22k/47k	SOT-416	16ta	-	3a	Nxp
32	-	PDTC124XEF	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=22k/47k	SOT-416	18ta	-	3a	Nxp
-32	-	PDTC143XT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k	SOT-23	16ta	-	3a	NxH
320	-	AT-32033	Si-npn	UHF, 11V, 32mA, 0.2W, B=70..300, 10GHz	SOT-23	16ta	-	3a	Agi
320A	-	AP8853-20A	LVR-IC	LDO, 2.0V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
320AC	-	BL8509-320ACRM	Vdet-IC	3.2V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
320AC	-	LC9009CB3TR320AC	Vdet-IC	3.2V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
320AG	-	AP8853-20GA	LVR-IC	LDO, 2.0V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
320AN	-	BL8509-320ANRM	Vdet-IC	3.2V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
320AN	-	LC9009CB3TR320AN	Vdet-IC	3.2V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
320B	-	AP8853-20B	LVR-IC	LDO, 2.0V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
320BC	-	BL8509-320BCRM	Vdet-IC	3.2V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
320BC	-	LC9009CB3TR320BC	Vdet-IC	3.2V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
320BG	-	AP8853-20GB	LVR-IC	LDO, 2.0V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
320BN	-	BL8509-320BNRM	Vdet-IC	3.2V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
320BN	-	LC9009CB3TR320BN	Vdet-IC	3.2V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
320C	-	AP8853-20C	LVR-IC	LDO, 2.0V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
320C	-	FS8853-20GC	LVR-IC	LDO, 2.0V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
320CC	-	BL8509-320CCRM	Vdet-IC	3.2V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
320CC	-	LC9009CB3TR320CC	Vdet-IC	3.2V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
320CG	-	AP8853-20GC	LVR-IC	LDO, 2.0V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
320CN	-	BL8509-320CNRM	Vdet-IC	3.2V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
320CN	-	LC9009CB3TR320CN	Vdet-IC	3.2V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
320DC	-	BL8509-320DCRM	Vdet-IC	3.2V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
320DC	-	LC9009CB3TR320DC	Vdet-IC	3.2V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
320DN	-	BL8509-320DNRM	Vdet-IC	3.2V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
320DN	-	LC9009CB3TR320DN	Vdet-IC	3.2V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
320EC	-	BL8509-320ECRM	Vdet-IC	3.2V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
320EC	-	LC9009CB3TR320EC	Vdet-IC	3.2V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
320EN	-	BL8509-320ENRM	Vdet-IC	3.2V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
320EN	-	LC9009CB3TR320EN	Vdet-IC	3.2V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
320FC	-	BL8509-320FCRM	Vdet-IC	3.2V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
320FC	-	LC9009CB3TR320FC	Vdet-IC	3.2V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
320FN	-	BL8509-320FNRM	Vdet-IC	3.2V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
320FN	-	LC9009CB3TR320FN	Vdet-IC	3.2V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
320GC	-	BL8509-320GCRM	Vdet-IC	3.2V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
320GC	-	LC9009CB3TR320GC	Vdet-IC	3.2V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
320GN	-	BL8509-320GNRM	Vdet-IC	3.2V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
320GN	-	LC9009CB3TR320GN	Vdet-IC	3.2V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
320V	-	AP8853-20V	LVR-IC	LDO, 2.0V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
320VG	-	AP8853-20GV	LVR-IC	LDO, 2.0V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
321A	-	AP8853-21A	LVR-IC	LDO, 2.1V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
321AG	-	AP8853-21GA	LVR-IC	LDO, 2.1V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
321B	-	AP8853-21B	LVR-IC	LDO, 2.1V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
321BG	-	AP8853-21GB	LVR-IC	LDO, 2.1V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
321C	-	AP8853-21C	LVR-IC	LDO, 2.1V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
321C	-	FS8853-21GC	LVR-IC	LDO, 2.1V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
321CG	-	AP8853-21GC	LVR-IC	LDO, 2.1V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
321V	-	AP8853-21V	LVR-IC	LDO, 2.1V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
321VG	-	AP8853-21GV	LVR-IC	LDO, 2.1V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
32-2	-	UTC8132-2	Vdet-IC	3.2V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
322A	-	AP8853-22A	LVR-IC	LDO, 2.2V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
322AG	-	AP8853-22GA	LVR-IC	LDO, 2.2V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
322B	-	AP8853-22B	LVR-IC	LDO, 2.2V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
322BG	-	AP8853-22GB	LVR-IC	LDO, 2.2V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
322C	-	AP8853-22C	LVR-IC	LDO, 2.2V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
322C	-	FS8853-22GC	LVR-IC	LDO, 2.2V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
322CG	-	AP8853-22GC	LVR-IC	LDO, 2.2V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
322V	-	AP8853-22V	LVR-IC	LDO, 2.2V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
322VG	-	AP8853-22GV	LVR-IC	LDO, 2.2V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
32-3	-	UTC8132-3	Vdet-IC	3.2V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
323A	-	AP8853-23A	LVR-IC	LDO, 2.3V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
323AG	-	AP8853-23GA	LVR-IC	LDO, 2.3V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
323B	-	AP8853-23B	LVR-IC	LDO, 2.3V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
323BG	-	AP8853-23GB	LVR-IC	LDO, 2.3V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
323C	-	AP8853-23C	LVR-IC	LDO, 2.3V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
323C	-	FS8853-23GC	LVR-IC	LDO, 2.3V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
323CG	-	AP8853-23GC	LVR-IC	LDO, 2.3V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
323V	-	AP8853-23V	LVR-IC	LDO, 2.3V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
323VG	-	AP8853-23GV	LVR-IC	LDO, 2.3V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
324A	-	AP8853-24A	LVR-IC	LDO, 2.4V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
324AG	-	AP8853-24GA	LVR-IC	LDO, 2.4V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
324B	-	AP8853-24B	LVR-IC	LDO, 2.4V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
324BG	-	AP8853-24GB	LVR-IC	LDO, 2.4V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
324C	-	AP8853-24C	LVR-IC	LDO, 2.4V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
324C	-	FS8853-24GC	LVR-IC	LDO, 2.4V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
324CG	-	AP8853-24GC	LVR-IC	LDO, 2.4V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
324V	-	AP8853-24V	LVR-IC	LDO, 2.4V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
324VG	-	AP8853-24GV	LVR-IC	LDO, 2.4V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
32-5	-	UTC8132-5	Vdet-IC	3.2V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
325A	-	AP8853-25A	LVR-IC	LDO, 2.5V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
325AG	-	AP8853-25GA	LVR-IC	LDO, 2.5V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
325B	-	AP8853-25B	LVR-IC	LDO, 2.5V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
325BG	-	AP8853-25GB	LVR-IC	LDO, 2.5V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
325C	-	AP8853-25C	LVR-IC	LDO, 2.5V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
325C	-	FS8853-25GC	LVR-IC	LDO, 2.5V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
325CG	-	AP8853-25GC	LVR-IC	LDO, 2.5V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
325V	-	AP8853-25V	LVR-IC	LDO, 2.5V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
325VG	-	AP8853-25GV	LVR-IC	LDO, 2.5V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
326A	-	AP8853-26A	LVR-IC	LDO, 2.6V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
326AG	-	AP8853-26GA	LVR-IC	LDO, 2.6V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
326B	-	AP8853-26B	LVR-IC	LDO, 2.6V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
326BG	-	AP8853-26GB	LVR-IC	LDO, 2.6V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
326C	-	AP8853-26C	LVR-IC	LDO, 2.6V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
326C	-	FS8853-26GC	LVR-IC	LDO, 2.6V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
326CG	-	AP8853-26GC	LVR-IC	LDO, 2.6V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
326V	-	AP8853-26V	LVR-IC	LDO, 2.6V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
326VG	-	AP8853-26GV	LVR-IC	LDO, 2.6V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
327A	-	AP8853-27A	LVR-IC	LDO, 2.7V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
327AG	-	AP8853-27GA	LVR-IC	LDO, 2.7V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
327B	-	AP8853-27B	LVR-IC	LDO, 2.7V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
327BG	-	AP8853-27GB	LVR-IC	LDO, 2.7V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
327C	-	AP8853-27C	LVR-IC	LDO, 2.7V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
327C	-	FS8853-27GC	LVR-IC	LDO, 2.7V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
327CG	-	AP8853-27GC	LVR-IC	LDO, 2.7V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
327V	-	AP8853-27V	LVR-IC	LDO, 2.7V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
327VG	-	AP8853-27GV	LVR-IC	LDO, 2.7V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
328A	-	AP8853-28A	LVR-IC	LDO, 2.8V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
328AG	-	AP8853-28GA	LVR-IC	LDO, 2.8V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
328B	-	AP8853-28B	LVR-IC	LDO, 2.8V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
328BG	-	AP8853-28GB	LVR-IC	LDO, 2.8V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
328C	-	AP8853-28C	LVR-IC	LDO, 2.8V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
328C	-	FS8853-28GC	LVR-IC	LDO, 2.8V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
328CG	-	AP8853-28GC	LVR-IC	LDO, 2.8V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
328V	-	AP8853-28V	LVR-IC	LDO, 2.8V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
328VG	-	AP8853-28GV	LVR-IC	LDO, 2.8V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
329A	-	AP8853-29A	LVR-IC	LDO, 2.9V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
329AG	-	AP8853-29GA	LVR-IC	LDO, 2.9V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
329B	-	AP8853-29B	LVR-IC	LDO, 2.9V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
329BG	-	AP8853-29GB	LVR-IC	LDO, 2.9V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
329C	-	AP8853-29C	LVR-IC	LDO, 2.9V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
329C	-	FS8853-29GC	LVR-IC	LDO, 2.9V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
329CG	-	AP8853-29GC	LVR-IC	LDO, 2.9V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
329V	-	AP8853-29V	LVR-IC	LDO, 2.9V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
329VG	-	AP8853-29GV	LVR-IC	LDO, 2.9V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
32A	-	AAT60032A-S2	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
32A	-	SP432AS23RG	Vref-IC	Precision, Shunt, adjustable 1.24...20V±0.5%	SOT-23	16rb	RF1	3b	Syn
32B	-	AAT60032B-S2	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
32B	-	MMBZ5232BPT	Z-diode	5.320..5.880V, Izt=5mA, Zzt=25Ω, 225mW	SOT-23	16dc	-	3a	Chm
32B	-	SP432BS23RG	Vref-IC	Precision, Shunt, adjustable 1.24...20V±1.0%	SOT-23	16rb	RF1	3b	Syn
32C	-	AAT60032C-S2	Vdet-IC	3.2V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
32D	-	AAT60032D-S2	Vdet-IC	3.2V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
32K	-	XC6203E182MR	LVR-IC	1.8V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
32L	-	XC6203E192MR	LVR-IC	1.9V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
32M	-	XC6203E202MR	LVR-IC	2V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
32N	-	XC6203E212MR	LVR-IC	2.1V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
32P	-	XC6203E222MR	LVR-IC	2.2V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
32R	-	XC6203E232MR	LVR-IC	2.3V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
32S	-	MMBZ5232SPT	Z-diode	5.488..5.712V, Izt=5mA, Zzt=25Ω, 225mW	SOT-23	16dc	-	3a	Chm
32S	-	MMCZ5232SPT	Z-diode	5.488..5.712V, Izt=5mA, Zzt=25Ω, 225mW	SOT-346	16dc	-	3a	Chm
32S	-	XC6203E242MR	LVR-IC	2.4V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
32T	-	TK71532AS	LVR-IC	LDO, 3.2V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
32T	-	XC6203E252MR	LVR-IC	2.5V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
32U	-	XC6203E262MR	LVR-IC	2.6V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
32V	-	XC6203E272MR	LVR-IC	2.7V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
32X	-	XC6203E282MR	LVR-IC	2.8V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
32Y	-	XC6203E292MR	LVR-IC	2.9V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
32Z	-	XC6203E302MR	LVR-IC	3V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33	-	2SC2412MPT-Q	Si-npn	Sw, 50V, 150mA, 200mW, B=120..270, 180MHz	SOT-723	18ta	-	3a	Chm
33	-	DTA143XE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/10k	SOT-416	16ta	-	3a	Rhm
33	-	DTA143XKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/10k	SOT-346	16ta	-	3a	Rhm
33	-	DTA143XM	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/10k	VMT3	18ta	-	3a	Rhm
33	-	DTA143XUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/10k	UMT3	16ta	-	3a	Rhm
33	-	ELM9733NBB	Vdet-IC	3.3V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
33	-	ELM9833BB	LVR-IC	3.3V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
33	-	PDTC114YE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=10k/47k	SOT-416	16ta	-	3a	Nxp
33	-	PDTC144TEF	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=47k	SOT-490	18ta	-	3a	Nxp
33	-	TZT3.3W	Z-diode	3.10..3.50V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3a	Ttr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
33	-	Z02W3.3V	Z-diode	3.10..3.50V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3f	Kec
33-	ca	HZM33NB	Z-diode	31..35V, Izt=2mA, 200mW	SC-59A	16dc	-	3a	Ren
330	-	HZM3.3NB	Z-diode	3.1..3.5V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
330	-	XC6203E312MR	LVR-IC	3.1V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
330A	-	AP8853-30A	LVR-IC	LDO, 3.0V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
330AC	-	BL8509-330ACRM	Vdet-IC	3.3V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
330AC	-	LC9009CB3TR330AC	Vdet-IC	3.3V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
330AG	-	AP8853-30GA	LVR-IC	LDO, 3.0V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
330AN	-	BL8509-330ANRM	Vdet-IC	3.3V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
330AN	-	LC9009CB3TR330AN	Vdet-IC	3.3V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
330B	-	AP8853-30B	LVR-IC	LDO, 3.0V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
330BC	-	BL8509-330BCRM	Vdet-IC	3.3V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
330BC	-	LC9009CB3TR330BC	Vdet-IC	3.3V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
330BG	-	AP8853-30GB	LVR-IC	LDO, 3.0V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
330BN	-	BL8509-330BNRM	Vdet-IC	3.3V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
330BN	-	LC9009CB3TR330BN	Vdet-IC	3.3V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
330C	-	AP8853-30C	LVR-IC	LDO, 3.0V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
330C	-	FS8853-30GC	LVR-IC	LDO, 3.0V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
330CC	-	BL8509-330CCRM	Vdet-IC	3.3V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
330CC	-	LC9009CB3TR330CC	Vdet-IC	3.3V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
330CG	-	AP8853-30GC	LVR-IC	LDO, 3.0V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
330CN	-	BL8509-330CNRM	Vdet-IC	3.3V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
330CN	-	LC9009CB3TR330CN	Vdet-IC	3.3V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
330DC	-	BL8509-330DCRM	Vdet-IC	3.3V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
330DC	-	LC9009CB3TR330DC	Vdet-IC	3.3V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
330DN	-	BL8509-330DNRM	Vdet-IC	3.3V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
330DN	-	LC9009CB3TR330DN	Vdet-IC	3.3V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
330EC	-	BL8509-330ECRM	Vdet-IC	3.3V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
330EC	-	LC9009CB3TR330EC	Vdet-IC	3.3V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
330EN	-	BL8509-330ENRM	Vdet-IC	3.3V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
330EN	-	LC9009CB3TR330EN	Vdet-IC	3.3V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
330FC	-	BL8509-330FCRM	Vdet-IC	3.3V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
330FC	-	LC9009CB3TR330FC	Vdet-IC	3.3V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
330FN	-	BL8509-330FNRM	Vdet-IC	3.3V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
330FN	-	LC9009CB3TR330FN	Vdet-IC	3.3V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
330GC	-	BL8509-330GCRM	Vdet-IC	3.3V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
330GC	-	LC9009CB3TR330GC	Vdet-IC	3.3V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
330GN	-	BL8509-330GNRM	Vdet-IC	3.3V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
330GN	-	LC9009CB3TR330GN	Vdet-IC	3.3V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
330V	-	AP8853-30V	LVR-IC	LDO, 3.0V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
330VG	-	AP8853-30GV	LVR-IC	LDO, 3.0V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
331	-	HZM3.3NB1	Z-diode	3.1..3.35V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
331	-	NDS331N	n-MOSFET	V-MOS, LogL, 20V, 1.3A, <0.16Ω	SOT-23	16fh	-	3a	Nsc
331	-	PZM3.3NB1	Z-diode	3.3V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
331	-	XC6203E322MR	LVR-IC	3.2V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
331A	-	AP8853-31A	LVR-IC	LDO, 3.1V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
331AG	-	AP8853-31GA	LVR-IC	LDO, 3.1V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
331B	-	AP8853-31B	LVR-IC	LDO, 3.1V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
331BG	-	AP8853-31GB	LVR-IC	LDO, 3.1V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
331C	-	AP8853-31C	LVR-IC	LDO, 3.1V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
331C	-	FS8853-31GC	LVR-IC	LDO, 3.1V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
331CG	-	AP8853-31GC	LVR-IC	LDO, 3.1V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
331V	-	AP8853-31V	LVR-IC	LDO, 3.1V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
331VG	-	AP8853-31GV	LVR-IC	LDO, 3.1V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
332	-	HZM3.3NB2	Z-diode	3.25..3.5V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
332	-	NDS332P	p-MOSFET	V-MOS, LogL, 20V, 1A, <0.41Ω(5A)	SOT-23	16fh	-	3a	Nsc
332	-	PZM3.3NB2	Z-diode	3.3V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
332	-	XC6203E332MR	LVR-IC	3.3V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33-2	-	UTC8133-2	Vdet-IC	3.3V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
332A	-	AP8853-32A	LVR-IC	LDO, 3.2V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
332AG	-	AP8853-32GA	LVR-IC	LDO, 3.2V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
332B	-	AP8853-32B	LVR-IC	LDO, 3.2V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
332BG	-	AP8853-32GB	LVR-IC	LDO, 3.2V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
332C	-	AP8853-32C	LVR-IC	LDO, 3.2V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
332C	-	FS8853-32GC	LVR-IC	LDO, 3.2V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
332CG	-	AP8853-32GC	LVR-IC	LDO, 3.2V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
332V	-	AP8853-32V	LVR-IC	LDO, 3.2V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
332VG	-	AP8853-32GV	LVR-IC	LDO, 3.2V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
333	-	XC6203E342MR	LVR-IC	3.4V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33-3	-	UTC8133-3	Vdet-IC	3.3V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
333A	-	AP8853-33A	LVR-IC	LDO, 3.3V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
333AG	-	AP8853-33GA	LVR-IC	LDO, 3.3V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
333B	-	AP8853-33B	LVR-IC	LDO, 3.3V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
333BG	-	AP8853-33GB	LVR-IC	LDO, 3.3V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
333C	-	AP8853-33C	LVR-IC	LDO, 3.3V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
333C	-	FS8853-33GC	LVR-IC	LDO, 3.3V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
333CG	-	AP8853-33GC	LVR-IC	LDO, 3.3V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
333V	-	AP8853-33V	LVR-IC	LDO, 3.3V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
333VG	-	AP8853-33GV	LVR-IC	LDO, 3.3V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
334	-	XC6203E352MR	LVR-IC	3.5V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
334A	-	AP8853-34A	LVR-IC	LDO, 3.4V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
334AG	-	AP8853-34GA	LVR-IC	LDO, 3.4V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
334B	-	AP8853-34B	LVR-IC	LDO, 3.4V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
334BG	-	AP8853-34GB	LVR-IC	LDO, 3.4V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
334C	-	AP8853-34C	LVR-IC	LDO, 3.4V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
334C	-	FS8853-34GC	LVR-IC	LDO, 3.4V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
334CG	-	AP8853-34GC	LVR-IC	LDO, 3.4V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
334V	-	AP8853-34V	LVR-IC	LDO, 3.4V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
334VG	-	AP8853-34GV	LVR-IC	LDO, 3.4V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
335	-	NDS335N	n-MOSFET	V-MOS, LogL, 20V, 1.7A, <0.11Ω	SOT-23	16fh	-	3a	Nsc
335	-	XC6203E362MR	LVR-IC	3.6V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33-5	-	UTC8133-5	Vdet-IC	3.3V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
335A	-	AP8853-35A	LVR-IC	LDO, 3.5V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
335AG	-	AP8853-35GA	LVR-IC	LDO, 3.5V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
335B	-	AP8853-35B	LVR-IC	LDO, 3.5V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
335BG	-	AP8853-35GB	LVR-IC	LDO, 3.5V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
335C	-	AP8853-35C	LVR-IC	LDO, 3.5V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
335C	-	FS8853-35GC	LVR-IC	LDO, 3.5V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
335CG	-	AP8853-35GC	LVR-IC	LDO, 3.5V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
335V	-	AP8853-35V	LVR-IC	LDO, 3.5V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
335VG	-	AP8853-35GV	LVR-IC	LDO, 3.5V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
336	-	NDS336P	p-MOSFET	V-MOS, LogL, 20V, 1.2A, <0.27Ω	SOT-23	16fh	-	3a	Nsc
336	-	XC6203E372MR	LVR-IC	3.7V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
336A	-	AP8853-36A	LVR-IC	LDO, 3.6V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
336AG	-	AP8853-36GA	LVR-IC	LDO, 3.6V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
336B	-	AP8853-36B	LVR-IC	LDO, 3.6V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
336BG	-	AP8853-36GB	LVR-IC	LDO, 3.6V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
336C	-	AP8853-36C	LVR-IC	LDO, 3.6V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
336C	-	FS8853-36GC	LVR-IC	LDO, 3.6V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
336CG	-	AP8853-36GC	LVR-IC	LDO, 3.6V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
336V	-	AP8853-36V	LVR-IC	LDO, 3.6V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
336VG	-	AP8853-36GV	LVR-IC	LDO, 3.6V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
337	-	XC6203E382MR	LVR-IC	3.8V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
337A	-	AP8853-37A	LVR-IC	LDO, 3.7V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
337AG	-	AP8853-37GA	LVR-IC	LDO, 3.7V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
337B	-	AP8853-37B	LVR-IC	LDO, 3.7V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
337BG	-	AP8853-37GB	LVR-IC	LDO, 3.7V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
337C	-	AP8853-37C	LVR-IC	LDO, 3.7V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
337C	-	FS8853-37GC	LVR-IC	LDO, 3.7V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
337CG	-	AP8853-37GC	LVR-IC	LDO, 3.7V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
337V	-	AP8853-37V	LVR-IC	LDO, 3.7V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
337VG	-	AP8853-37GV	LVR-IC	LDO, 3.7V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
338	-	XC6203E392MR	LVR-IC	3.9V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
338A	-	AP8853-38A	LVR-IC	LDO, 3.8V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
338AG	-	AP8853-38GA	LVR-IC	LDO, 3.8V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
338B	-	AP8853-38B	LVR-IC	LDO, 3.8V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
338BG	-	AP8853-38GB	LVR-IC	LDO, 3.8V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
338C	-	AP8853-38C	LVR-IC	LDO, 3.8V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
338C	-	FS8853-38GC	LVR-IC	LDO, 3.8V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
338CG	-	AP8853-38GC	LVR-IC	LDO, 3.8V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
338V	-	AP8853-38V	LVR-IC	LDO, 3.8V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
338VG	-	AP8853-38GV	LVR-IC	LDO, 3.8V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
339	-	XC6203E402MR	LVR-IC	4V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
339A	-	AP8853-39A	LVR-IC	LDO, 3.9V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
339AG	-	AP8853-39GA	LVR-IC	LDO, 3.9V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
339B	-	AP8853-39B	LVR-IC	LDO, 3.9V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
339BG	-	AP8853-39GB	LVR-IC	LDO, 3.9V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
339C	-	AP8853-39C	LVR-IC	LDO, 3.9V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
339C	-	FS8853-39GC	LVR-IC	LDO, 3.9V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
339CG	-	AP8853-39GC	LVR-IC	LDO, 3.9V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
339V	-	AP8853-39V	LVR-IC	LDO, 3.9V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
339VG	-	AP8853-39GV	LVR-IC	LDO, 3.9V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
33A	-	AAT60033A-S2	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
33A	-	MMBZ33VA	TVS	Dual, Vrwm=26V, Vbr=31.35..34.65V, 0.87A, 40W(1ms)	SOT-23	16dg	-	3a	Wtr
33A	-	TZT33W	Z-diode	32.15..33.79V, Izt=2.0mA, 200mW	SOT-23	16dc	-	3a	Ttr
33A	-	XC6203E412MR	LVR-IC	4.1V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33AC	-	FM1233ACS3X	Vdet-IC	2.88V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	F
33AD	-	FM1233ADS3X	Vdet-IC	2.72V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	F
33B	-	AAT60033B-S2	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
33B	-	BZX84C33-V	Z-diode	32.15..33.79V, Izt=2mA, Zzt=250Ω, 300mW	SOT-23	16dc	-	3f	Kec
33B	-	MMBZ5233BPT	Z-diode	5.700..6.300V, Izt=5mA, Zzt=25Ω, 225mW	SOT-23	16dc	-	3a	Chm
33B	-	XC6203E422MR	LVR-IC	4.2V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33BA	-	FM1233ABAS3X	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	F
33C	-	AAT60033C-S2	Vdet-IC	3.3V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
33C	-	XC6203E432MR	LVR-IC	4.3V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33D	-	AAT60033D-S2	Vdet-IC	3.3V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
33D	-	XC6203E442MR	LVR-IC	4.4V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33E	-	XC6203E452MR	LVR-IC	4.5V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33F	-	XC6203E462MR	LVR-IC	4.6V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33G	-	ZD33G-AE3	Z-diode	33V±5%, Zzt=250Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
33H	-	BZX84C3V3-V	Z-diode	3.10..3.50V, Izt=5mA, Zzt=130Ω, 300mW	SOT-23	16dc	-	3f	Kec
33H	-	MAZ3330-H	Z-diode	31..35V, If=100mA, Zzt=80Ω, 200mW	SC-59	16dc	-	3a	Pan
33H	-	XC6203E472MR	LVR-IC	4.7V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33K	-	XC6203E482MR	LVR-IC	4.8V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33L	-	MAZ3330-L	Z-diode	31..35V, If=100mA, Zzt=80Ω, 200mW	SC-59	16dc	-	3a	Pan
33L	-	XC6203E492MR	LVR-IC	4.9V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33L	-	ZD33L-AE3	Z-diode	33V±5%, Zzt=250Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
33M	-	MAZ3330-M	Z-diode	31..35V, If=100mA, Zzt=80Ω, 200mW	SC-59	16dc	-	3a	Pan
33M	-	XC6203E502MR	LVR-IC	5V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33N	-	XC6203E512MR	LVR-IC	5.1V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33P	-	XC6203E522MR	LVR-IC	5.2V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33R	-	XC6203E532MR	LVR-IC	5.3V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33S	-	MMBZ5233SPT	Z-diode	5.880..6.120V, Izt=5mA, Zzt=25Ω, 225mW	SOT-23	16dc	-	3a	Chm
33S	-	MMCZ5233SPT	Z-diode	5.880..6.120V, Izt=5mA, Zzt=25Ω, 225mW	SOT-346	16dc	-	3a	Chm
33S	-	XC6203E542MR	LVR-IC	5.4V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33T	-	TK71533AS	LVR-IC	LDO, 3.3V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
33T	-	XC6203E552MR	LVR-IC	5.5V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33U	-	XC6203E562MR	LVR-IC	5.6V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33V	-	CHPZ33VPT	Z-diode	Dual, 31.0..35.0V, Izt=2mA, Zzt=80Ω, 350mW	SOT-23	16df	-	3a	Chm
33V	-	PZM33NB	Z-diode	33V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
33V	-	PZM33NB1	Z-diode	33V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
33V	-	XC6203E572MR	LVR-IC	5.7V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33X	-	TZT3.3XW	Z-diode	3.10..3.35V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3a	Ttr
33X	-	XC6203E582MR	LVR-IC	5.8V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33X	-	Z02W3.3VX	Z-diode	3.10..3.35V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3f	Kec
33Y	-	XC6203E592MR	LVR-IC	5.9V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33Z	-	02CZ33Z	Z-diode	31.0..35.0V, Izt=2mA, 200mW	SC-59	16dc	-	3a	Tos
33Z	-	CZ1W33	Z-diode	33V±5%, Izt=7.5mA, 600mW	SOT-23	16dc	-	3a	Cdi
33Z	-	TZT3.3ZW	Z-diode	3.25..3.50V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3a	Ttr
33Z	-	XC6203E602MR	LVR-IC	6V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
33Z	-	Z02W3.3VZ	Z-diode	3.25..3.50V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3f	Kec
34	-	2SC2412MPT-R	Si-npn	Sw, 50V, 150mA, 200mW, B=180..390, 180MHz	SOT-723	18ta	-	3a	Chm
34	-	2SC5007-FB	Si-npn	UHF/VHF, 20V, 65mA, 125mW, 7GHz, B=80..160	SOT-23	16ta	-	3a	Nec
34	-	ELM9734NBB	Vdet-IC	3.4V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
34	-	ELM9834BB	LVR-IC	3.4V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
34	-	NE68119-FB	Si-npn	UHF/VHF, 20V, 65mA, 125mW, 7GHz, B=80..160	SOT-23	16ta	-	3a	Cel
34	-	PDTC143XE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=4.7k/10k	SOT-416	16ta	-	3a	Nxp
34	-	PDTC144WEF	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/22k	SOT-490	18ta	-	3a	Nxp
340A	-	AP8853-40A	LVR-IC	LDO, 4.0V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
340AC	-	BL8509-340ACRM	Vdet-IC	3.4V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
340AC	-	LC9009CB3TR340AC	Vdet-IC	3.4V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
340AG	-	AP8853-40GA	LVR-IC	LDO, 4.0V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
340AN	-	BL8509-340ANRM	Vdet-IC	3.4V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
340AN	-	LC9009CB3TR340AN	Vdet-IC	3.4V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
340B	-	AP8853-40B	LVR-IC	LDO, 4.0V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
340BC	-	BL8509-340BCRM	Vdet-IC	3.4V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
340BC	-	LC9009CB3TR340BC	Vdet-IC	3.4V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
340BG	-	AP8853-40GB	LVR-IC	LDO, 4.0V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
340BN	-	BL8509-340BNRM	Vdet-IC	3.4V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
340BN	-	LC9009CB3TR340BN	Vdet-IC	3.4V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
340C	-	AP8853-40C	LVR-IC	LDO, 4.0V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
340C	-	FS8853-40GC	LVR-IC	LDO, 4.0V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
340CC	-	BL8509-340CCRM	Vdet-IC	3.4V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
340CC	-	LC9009CB3TR340CC	Vdet-IC	3.4V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
340CG	-	AP8853-40GC	LVR-IC	LDO, 4.0V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
340CN	-	BL8509-340CNRM	Vdet-IC	3.4V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
340CN	-	LC9009CB3TR340CN	Vdet-IC	3.4V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
340DC	-	BL8509-340DCRM	Vdet-IC	3.4V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
340DC	-	LC9009CB3TR340DC	Vdet-IC	3.4V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
340DN	-	BL8509-340DNRM	Vdet-IC	3.4V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
340DN	-	LC9009CB3TR340DN	Vdet-IC	3.4V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
340EC	-	BL8509-340ECRM	Vdet-IC	3.4V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
340EC	-	LC9009CB3TR340EC	Vdet-IC	3.4V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
340EN	-	BL8509-340ENRM	Vdet-IC	3.4V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
340EN	-	LC9009CB3TR340EN	Vdet-IC	3.4V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
340FC	-	BL8509-340FCRM	Vdet-IC	3.4V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
340FC	-	LC9009CB3TR340FC	Vdet-IC	3.4V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
340FN	-	BL8509-340FNRM	Vdet-IC	3.4V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
340FN	-	LC9009CB3TR340FN	Vdet-IC	3.4V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
340GC	-	BL8509-340GCRM	Vdet-IC	3.4V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
340GC	-	LC9009CB3TR340GC	Vdet-IC	3.4V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
340GN	-	BL8509-340GNRM	Vdet-IC	3.4V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
340GN	-	LC9009CB3TR340GN	Vdet-IC	3.4V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
340V	-	AP8853-40V	LVR-IC	LDO, 4.0V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
340VG	-	AP8853-40GV	LVR-IC	LDO, 4.0V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
341A	-	AP8853-41A	LVR-IC	LDO, 4.1V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
341AG	-	AP8853-41GA	LVR-IC	LDO, 4.1V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
341B	-	AP8853-41B	LVR-IC	LDO, 4.1V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
341BG	-	AP8853-41GB	LVR-IC	LDO, 4.1V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
341C	-	AP8853-41C	LVR-IC	LDO, 4.1V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
341C	-	FS8853-41GC	LVR-IC	LDO, 4.1V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
341CG	-	AP8853-41GC	LVR-IC	LDO, 4.1V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
341V	-	AP8853-41V	LVR-IC	LDO, 4.1V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
341VG	-	AP8853-41GV	LVR-IC	LDO, 4.1V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
34-2	-	UTC8134-2	Vdet-IC	3.4V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
342A	-	AP8853-42A	LVR-IC	LDO, 4.2V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
342AG	-	AP8853-42GA	LVR-IC	LDO, 4.2V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
342B	-	AP8853-42B	LVR-IC	LDO, 4.2V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
342BG	-	AP8853-42GB	LVR-IC	LDO, 4.2V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
342C	-	AP8853-42C	LVR-IC	LDO, 4.2V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
342C	-	FS8853-42GC	LVR-IC	LDO, 4.2V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
342CG	-	AP8853-42GC	LVR-IC	LDO, 4.2V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
342V	-	AP8853-42V	LVR-IC	LDO, 4.2V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
342VG	-	AP8853-42GV	LVR-IC	LDO, 4.2V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
34-3	-	UTC8134-3	Vdet-IC	3.4V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
343A	-	AP8853-43A	LVR-IC	LDO, 4.3V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
343AG	-	AP8853-43GA	LVR-IC	LDO, 4.3V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
343B	-	AP8853-43B	LVR-IC	LDO, 4.3V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
343BG	-	AP8853-43GB	LVR-IC	LDO, 4.3V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
343C	-	AP8853-43C	LVR-IC	LDO, 4.3V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
343C	-	FS8853-43GC	LVR-IC	LDO, 4.3V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
343CG	-	AP8853-43GC	LVR-IC	LDO, 4.3V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
343V	-	AP8853-43V	LVR-IC	LDO, 4.3V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
343VG	-	AP8853-43GV	LVR-IC	LDO, 4.3V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
344A	-	AP8853-44A	LVR-IC	LDO, 4.4V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
344AG	-	AP8853-44GA	LVR-IC	LDO, 4.4V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
344B	-	AP8853-44B	LVR-IC	LDO, 4.4V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
344BG	-	AP8853-44GB	LVR-IC	LDO, 4.4V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
344C	-	AP8853-44C	LVR-IC	LDO, 4.4V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
344C	-	FS8853-44GC	LVR-IC	LDO, 4.4V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
344CG	-	AP8853-44GC	LVR-IC	LDO, 4.4V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
344V	-	AP8853-44V	LVR-IC	LDO, 4.4V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
344VG	-	AP8853-44GV	LVR-IC	LDO, 4.4V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
34-5	-	UTC8134-5	Vdet-IC	3.4V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
345A	-	AP8853-45A	LVR-IC	LDO, 4.5V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
345AG	-	AP8853-45GA	LVR-IC	LDO, 4.5V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
345B	-	AP8853-45B	LVR-IC	LDO, 4.5V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
345BG	-	AP8853-45GB	LVR-IC	LDO, 4.5V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
345C	-	AP8853-45C	LVR-IC	LDO, 4.5V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
345C	-	FS8853-45GC	LVR-IC	LDO, 4.5V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
345CG	-	AP8853-45GC	LVR-IC	LDO, 4.5V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
345V	-	AP8853-45V	LVR-IC	LDO, 4.5V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
345VG	-	AP8853-45GV	LVR-IC	LDO, 4.5V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
346A	-	AP8853-46A	LVR-IC	LDO, 4.6V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
346AG	-	AP8853-46GA	LVR-IC	LDO, 4.6V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
346B	-	AP8853-46B	LVR-IC	LDO, 4.6V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
346BG	-	AP8853-46GB	LVR-IC	LDO, 4.6V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
346C	-	AP8853-46C	LVR-IC	LDO, 4.6V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
346C	-	FS8853-46GC	LVR-IC	LDO, 4.6V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
346CG	-	AP8853-46GC	LVR-IC	LDO, 4.6V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
346V	-	AP8853-46V	LVR-IC	LDO, 4.6V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
346VG	-	AP8853-46GV	LVR-IC	LDO, 4.6V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
347A	-	AP8853-47A	LVR-IC	LDO, 4.7V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
347AG	-	AP8853-47GA	LVR-IC	LDO, 4.7V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
347B	-	AP8853-47B	LVR-IC	LDO, 4.7V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
347BG	-	AP8853-47GB	LVR-IC	LDO, 4.7V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
347C	-	AP8853-47C	LVR-IC	LDO, 4.7V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
347C	-	FS8853-47GC	LVR-IC	LDO, 4.7V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
347CG	-	AP8853-47GC	LVR-IC	LDO, 4.7V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
347V	-	AP8853-47V	LVR-IC	LDO, 4.7V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
347VG	-	AP8853-47GV	LVR-IC	LDO, 4.7V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
348A	-	AP8853-48A	LVR-IC	LDO, 4.8V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
348AG	-	AP8853-48GA	LVR-IC	LDO, 4.8V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
348B	-	AP8853-48B	LVR-IC	LDO, 4.8V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
348BG	-	AP8853-48GB	LVR-IC	LDO, 4.8V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
348C	-	AP8853-48C	LVR-IC	LDO, 4.8V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
348C	-	FS8853-48GC	LVR-IC	LDO, 4.8V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
348CG	-	AP8853-48GC	LVR-IC	LDO, 4.8V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
348V	-	AP8853-48V	LVR-IC	LDO, 4.8V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
348VG	-	AP8853-48GV	LVR-IC	LDO, 4.8V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
349A	-	AP8853-49A	LVR-IC	LDO, 4.9V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
349AG	-	AP8853-49GA	LVR-IC	LDO, 4.9V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
349B	-	AP8853-49B	LVR-IC	LDO, 4.9V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
349BG	-	AP8853-49GB	LVR-IC	LDO, 4.9V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
349C	-	AP8853-49C	LVR-IC	LDO, 4.9V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
349C	-	FS8853-49GC	LVR-IC	LDO, 4.9V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
349CG	-	AP8853-49GC	LVR-IC	LDO, 4.9V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
349V	-	AP8853-49V	LVR-IC	LDO, 4.9V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
349VG	-	AP8853-49GV	LVR-IC	LDO, 4.9V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
34A	-	AAT60034A-S2	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
34B	-	AAT60034B-S2	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
34B	-	MMBZ5234BPT	Z-diode	5.890..6.510V, Izt=5mA, Zzt=10Ω, 225mW	SOT-23	16dc	-	3a	Chm
34C	-	AAT60034C-S2	Vdet-IC	3.4V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
34D	-	AAT60034D-S2	Vdet-IC	3.4V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
34N	-	STM1061N34W	Vdet-IC	3.4V±2%, -Reset ODO	SOT-323	16vda	VD6	3d	Ste
34N	-	STM1061N34WX	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Ste
34S	-	MMBZ5234SPT	Z-diode	6.070..6.324V, Izt=5mA, Zzt=10Ω, 225mW	SOT-23	16dc	-	3a	Chm
34S	-	MMCZ5234SPT	Z-diode	6.070..6.324V, Izt=5mA, Zzt=10Ω, 225mW	SOT-346	16dc	-	3a	Chm
34T	-	TK71534AS	LVR-IC	LDO, 3.4V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
34X	-	XC6203E282AMR	LVR-IC	2.85V±2%, 400mA	SOT-23	16cg	VR1	3d	Tor
35	-	2SC2412MPT-S	Si-npn	Sw, 50V, 150mA, 200mW, B=270..560, 180MHz	SOT-723	18ta	-	3a	Chm
35	-	DTA124XE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=22k/47k	SOT-416	16ta	-	3a	Rhm
35	-	DTA124XKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	SOT-346	16ta	-	3a	Rhm
35	-	DTA124XM	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=22k/47k	VMT3	18ta	-	3a	Rhm
35	-	DTA124XUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	UMT3	16ta	-	3a	Rhm
35	-	ELM9735NBB	Vdet-IC	3.5V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
35	-	ELM9835BB	LVR-IC	3.5V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
35	-	PDTA143XE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=4.7k/10k	SOT-416	16ta	-	3a	Nxp
35	-	PDTC124TEF	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=22k	SOT-490	18ta	-	3a	Nxp
350A	-	AP8853-50A	LVR-IC	LDO, 5.0V±2%, 300mA, Pb-free	SOT-23	16eu	VR1	3hc	Anw
350AC	-	BL8509-350ACRM	Vdet-IC	3.5V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
350AC	-	LC9009CB3TR350AC	Vdet-IC	3.5V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
350AG	-	AP8853-50GA	LVR-IC	LDO, 5.0V±2%, 300mA, Halogen-free	SOT-23	16eu	VR1	3hb	Anw
350AN	-	BL8509-350ANRM	Vdet-IC	3.5V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
350AN	-	LC9009CB3TR350AN	Vdet-IC	3.5V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
350B	-	AP8853-50B	LVR-IC	LDO, 5.0V±2%, 300mA, Pb-free	SOT-23	16vl	VR1	3hc	Anw
350BC	-	BL8509-350BCRM	Vdet-IC	3.5V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
350BC	-	LC9009CB3TR350BC	Vdet-IC	3.5V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
350BG	-	AP8853-50GB	LVR-IC	LDO, 5.0V±2%, 300mA, Halogen-free	SOT-23	16vl	VR1	3hb	Anw
350BN	-	BL8509-350BNRM	Vdet-IC	3.5V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
350BN	-	LC9009CB3TR350BN	Vdet-IC	3.5V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
350C	-	AP8853-50C	LVR-IC	LDO, 5.0V±2%, 300mA, Pb-free	SOT-23	16cg	VR1	3hc	Anw
350C	-	FS8853-50GC	LVR-IC	LDO, 5.0V±35mV, 300mA	SOT-23	16cg	VR1	3ha	Frt
350CC	-	BL8509-350CCRM	Vdet-IC	3.5V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
350CC	-	LC9009CB3TR350CC	Vdet-IC	3.5V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
350CG	-	AP8853-50GC	LVR-IC	LDO, 5.0V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3hb	Anw
350CN	-	BL8509-350CNRM	Vdet-IC	3.5V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
350CN	-	LC9009CB3TR350CN	Vdet-IC	3.5V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
350DC	-	BL8509-350DCRM	Vdet-IC	3.5V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
350DC	-	LC9009CB3TR350DC	Vdet-IC	3.5V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
350DN	-	BL8509-350DNRM	Vdet-IC	3.5V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
350DN	-	LC9009CB3TR350DN	Vdet-IC	3.5V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
350EC	-	BL8509-350ECRM	Vdet-IC	3.5V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
350EC	-	LC9009CB3TR350EC	Vdet-IC	3.5V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
350EN	-	BL8509-350ENRM	Vdet-IC	3.5V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
350EN	-	LC9009CB3TR350EN	Vdet-IC	3.5V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
350FC	-	BL8509-350FCRM	Vdet-IC	3.5V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
350FC	-	LC9009CB3TR350FC	Vdet-IC	3.5V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
350FN	-	BL8509-350FNRM	Vdet-IC	3.5V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
350FN	-	LC9009CB3TR350FN	Vdet-IC	3.5V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
350GC	-	BL8509-350GCRM	Vdet-IC	3.5V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
350GC	-	LC9009CB3TR350GC	Vdet-IC	3.5V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
350GN	-	BL8509-350GNRM	Vdet-IC	3.5V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
350GN	-	LC9009CB3TR350GN	Vdet-IC	3.5V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
350V	-	AP8853-50V	LVR-IC	LDO, 5.0V±2%, 300mA, Pb-free	TSOT-23	16cg	VR1	3hc	Anw
350VG	-	AP8853-50GV	LVR-IC	LDO, 5.0V±2%, 300mA, Halogen-free	TSOT-23	16cg	VR1	3hb	Anw
351	-	NDS351N	n-MOSFET	V-MOS, LogL, 30V, ±1.1A, <0.25Ω	SOT-23	16fh	-	3a	Nsc
352	-	NDS352P	p-MOSFET	V-MOS, LogL, 20V, ±0.85A, <0.5Ω	SOT-23	16fh	-	3a	Nsc
35-2	-	UTC8135-2	Vdet-IC	3.5V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
35-3	-	UTC8135-3	Vdet-IC	3.5V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
355	-	NDS355N	n-MOSFET	V-MOS, LogL, 30V, ±1.6A, <0.125Ω	SOT-23	16fh	-	3a	Nsc
35-5	-	UTC8135-5	Vdet-IC	3.5V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
356	-	NDS356P	p-MOSFET	V-MOS, LogL, 20V, ±1.1A, <0.3Ω	SOT-23	16fh	-	3a	Nsc
35A	-	AAT60035A-S2	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
35B	-	AAT60035B-S2	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
35B	-	MMBZ5235BPT	Z-diode	6.460..7.140V, Izt=5mA, Zzt=8Ω, 225mW	SOT-23	16dc	-	3a	Chm
35C	-	AAT60035C-S2	Vdet-IC	3.5V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
35D	-	AAT60035D-S2	Vdet-IC	3.5V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
35K	-	XC6203P182MR	LVR-IC	1.8V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
35L	-	XC6203P192MR	LVR-IC	1.9V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
35M	-	XC6203P202MR	LVR-IC	2V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
35N	-	XC6203P212MR	LVR-IC	2.1V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
35P	-	XC6203P222MR	LVR-IC	2.2V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
35R	-	XC6203P232MR	LVR-IC	2.3V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
35S	-	MMBZ5235SPT	Z-diode	6.664..6.936V, Izt=5mA, Zzt=8Ω, 225mW	SOT-23	16dc	-	3a	Chm
35S	-	MMCZ5235SPT	Z-diode	6.664..6.936V, Izt=5mA, Zzt=8Ω, 225mW	SOT-346	16dc	-	3a	Chm
35S	-	XC6203P242MR	LVR-IC	2.4V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
35T	-	TK71535AS	LVR-IC	LDO, 3.5V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
35T	-	XC6203P252MR	LVR-IC	2.5V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
35U	-	XC6203P262MR	LVR-IC	2.6V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
35V	-	XC6203P272MR	LVR-IC	2.7V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
35X	-	XC6203P282MR	LVR-IC	2.8V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
35Y	-	XC6203P292MR	LVR-IC	2.9V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
35Z	-	XC6203P302MR	LVR-IC	3V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36	-	2SA2030PT	Si-pnp	AF, Sw, 12V, 500mA, B=270..680, 260MHz	SOT-723	18ta	-	3a	Chm
36	-	ELM9736NBB	Vdet-IC	3.6V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
36	-	ELM9836BB	LVR-IC	3.6V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
36	-	PDTA114YE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=10k/47k	SOT-416	16ta	-	3a	Nxp
36	-	PDTC124EEF	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k	SOT-490	18ta	-	3a	Nxp
36	-	TZT3.6W	Z-diode	3.40..3.80V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3a	Ttr
36	-	Z02W3.6V	Z-diode	3.40..3.80V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3f	Kec
36-	ca	HZM36NB	Z-diode	34..38V, Izt=2mA, 200mW	SC-59A	16dc	-	3a	Ren
360	-	HZM3.6NB	Z-diode	3.4..3.8V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
360	-	XC6203P312MR	LVR-IC	3.1V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
360AC	-	BL8509-360ACRM	Vdet-IC	3.6V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
360AC	-	LC9009CB3TR360AC	Vdet-IC	3.6V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
360AN	-	BL8509-360ANRM	Vdet-IC	3.6V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
360AN	-	LC9009CB3TR360AN	Vdet-IC	3.6V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
360BC	-	BL8509-360BCRM	Vdet-IC	3.6V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
360BC	-	LC9009CB3TR360BC	Vdet-IC	3.6V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
360BN	-	BL8509-360BNRM	Vdet-IC	3.6V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
360BN	-	LC9009CB3TR360BN	Vdet-IC	3.6V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
360CC	-	BL8509-360CCRM	Vdet-IC	3.6V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
360CC	-	LC9009CB3TR360CC	Vdet-IC	3.6V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
360CN	-	BL8509-360CNRM	Vdet-IC	3.6V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
360CN	-	LC9009CB3TR360CN	Vdet-IC	3.6V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
360DC	-	BL8509-360DCRM	Vdet-IC	3.6V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
360DC	-	LC9009CB3TR360DC	Vdet-IC	3.6V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
360DN	-	BL8509-360DNRM	Vdet-IC	3.6V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
360DN	-	LC9009CB3TR360DN	Vdet-IC	3.6V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
360EC	-	BL8509-360ECRM	Vdet-IC	3.6V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
360EC	-	LC9009CB3TR360EC	Vdet-IC	3.6V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
360EN	-	BL8509-360ENRM	Vdet-IC	3.6V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
360EN	-	LC9009CB3TR360EN	Vdet-IC	3.6V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
360FC	-	BL8509-360FCRM	Vdet-IC	3.6V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
360FC	-	LC9009CB3TR360FC	Vdet-IC	3.6V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
360FN	-	BL8509-360FNRM	Vdet-IC	3.6V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
360FN	-	LC9009CB3TR360FN	Vdet-IC	3.6V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
360GC	-	BL8509-360GCRM	Vdet-IC	3.6V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
360GC	-	LC9009CB3TR360GC	Vdet-IC	3.6V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
360GN	-	BL8509-360GNRM	Vdet-IC	3.6V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
360GN	-	LC9009CB3TR360GN	Vdet-IC	3.6V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
361	-	HZM3.6NB1	Z-diode	3.4..3.65V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
361	-	PZM3.6NB1	Z-diode	3.6V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
361	-	XC6203P322MR	LVR-IC	3.2V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
362	-	HZM3.6NB2	Z-diode	3.55..3.8V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
362	-	PZM3.6NB2	Z-diode	3.6V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
362	-	XC6203P332MR	LVR-IC	3.3V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36-2	-	UTC8136-2	Vdet-IC	3.6V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
363	-	XC6203P342MR	LVR-IC	3.4V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36-3	-	UTC8136-3	Vdet-IC	3.6V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
364	-	XC6203P352MR	LVR-IC	3.5V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
365	-	XC6203P362MR	LVR-IC	3.6V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36-5	-	UTC8136-5	Vdet-IC	3.6V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
366	-	XC6203P372MR	LVR-IC	3.7V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
367	-	XC6203P382MR	LVR-IC	3.8V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
368	-	XC6203P392MR	LVR-IC	3.9V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
369	-	XC6203P402MR	LVR-IC	4V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36A	-	AAT60036A-S2	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
36A	-	TZT36W	Z-diode	35.07..36.87V, Izt=2.0mA, 200mW	SOT-23	16dc	-	3a	Ttr
36A	-	XC6203P412MR	LVR-IC	4.1V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36B	-	AAT60036B-S2	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
36B	-	BZX84C36-V	Z-diode	35.07..36.87V, Izt=2mA, Zzt=300Ω, 300mW	SOT-23	16dc	-	3f	Kec
36B	-	MMBZ5236BPT	Z-diode	7.125..7.875V, Izt=5mA, Zzt=7Ω, 225mW	SOT-23	16dc	-	3a	Chm
36B	-	XC6203P422MR	LVR-IC	4.2V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36C	-	AAT60036C-S2	Vdet-IC	3.6V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
36C	-	TVS2336PT	TVS	Dual, Vbr=40V, Vrwm=36V, 1A, 300W(1ms)	SOT-23	16df	-	3a	Chm
36C	-	XC6203P432MR	LVR-IC	4.3V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36D	-	AAT60036D-S2	Vdet-IC	3.6V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
36D	-	XC6203P442MR	LVR-IC	4.4V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36E	-	XC6203P452MR	LVR-IC	4.5V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36F	-	XC6203P462MR	LVR-IC	4.6V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36G	-	ZD36G-AE3	Z-diode	36V±5%, Zzt=300Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
36H	-	BZX84C3V6-V	Z-diode	3.40..3.80V, Izt=5mA, Zzt=130Ω, 300mW	SOT-23	16dc	-	3f	Kec
36H	-	MAZ3360-H	Z-diode	34..38V, If=100mA, Zzt=90Ω, 200mW	SC-59	16dc	-	3a	Pan
36H	-	XC6203P472MR	LVR-IC	4.7V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36K	-	XC6203P482MR	LVR-IC	4.8V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36L	-	MAZ3360-L	Z-diode	34..38V, If=100mA, Zzt=90Ω, 200mW	SC-59	16dc	-	3a	Pan
36L	-	XC6203P492MR	LVR-IC	4.9V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36L	-	ZD36L-AE3	Z-diode	36V±5%, Zzt=300Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
36M	-	MAZ3360-M	Z-diode	34..38V, If=100mA, Zzt=90Ω, 200mW	SC-59	16dc	-	3a	Pan
36M	-	XC6203P502MR	LVR-IC	5V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36N	-	XC6203P512MR	LVR-IC	5.1V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36P	-	XC6203P522MR	LVR-IC	5.2V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36R	-	XC6203P532MR	LVR-IC	5.3V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36S	-	MMBZ5236SPT	Z-diode	7.350..7.650V, Izt=5mA, Zzt=7Ω, 225mW	SOT-23	16dc	-	3a	Chm
36S	-	MMCZ5236SPT	Z-diode	7.350..7.650V, Izt=5mA, Zzt=7Ω, 225mW	SOT-346	16dc	-	3a	Chm
36S	-	XC6203P542MR	LVR-IC	5.4V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36T	-	TK71536AS	LVR-IC	LDO, 3.6V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
36T	-	XC6203P552MR	LVR-IC	5.5V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
36U	-	XC6203P562MR	LVR-IC	5.6V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36V	-	PZM36NB	Z-diode	36V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
36V	-	PZM36NB1	Z-diode	36V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
36V	-	XC6203P572MR	LVR-IC	5.7V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36X	-	TZT3.6XW	Z-diode	3.40..3.55V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3a	Ttr
36X	-	XC6203P582MR	LVR-IC	5.8V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36X	-	Z02W3.6VX	Z-diode	3.40..3.65V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3f	Kec
36Y	-	XC6203P592MR	LVR-IC	5.9V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36Z	-	02CZ36Z	Z-diode	34.0..38.0V, Izt=2mA, 200mW	SC-59	16dc	-	3a	Tos
36Z	-	CZ1W36	Z-diode	36V±5%, Izt=7mA, 600mW	SOT-23	16dc	-	3a	Cdi
36Z	-	TZT3.6ZW	Z-diode	3.65..3.80V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3a	Ttr
36Z	-	XC6203P602MR	LVR-IC	6V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
36Z	-	Z02W3.6VZ	Z-diode	3.55..3.80V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3f	Kec
37	-	CH3906MPT	Si-pnp	AF, Sw, 40V, 200mA, B=100..300, 250MHz	SOT-723	18ta	-	3a	Chm
37	-	ELM9737NBB	Vdet-IC	3.7V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
37	-	ELM9837BB	LVR-IC	3.7V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
37	-	PDTA114YEF	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k	SOT-490	18ta	-	3a	Nxp
37	-	PDTA143ZE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=4.7k/47k	SOT-416	16ta	-	3a	Nxp
370AC	-	BL8509-370ACRM	Vdet-IC	3.7V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
370AC	-	LC9009CB3TR370AC	Vdet-IC	3.7V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
370AN	-	BL8509-370ANRM	Vdet-IC	3.7V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
370AN	-	LC9009CB3TR370AN	Vdet-IC	3.7V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
370BC	-	BL8509-370BCRM	Vdet-IC	3.7V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
370BC	-	LC9009CB3TR370BC	Vdet-IC	3.7V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
370BN	-	BL8509-370BNRM	Vdet-IC	3.7V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
370BN	-	LC9009CB3TR370BN	Vdet-IC	3.7V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
370CC	-	BL8509-370CCRM	Vdet-IC	3.7V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
370CC	-	LC9009CB3TR370CC	Vdet-IC	3.7V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
370CN	-	BL8509-370CNRM	Vdet-IC	3.7V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
370CN	-	LC9009CB3TR370CN	Vdet-IC	3.7V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
370DC	-	BL8509-370DCRM	Vdet-IC	3.7V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
370DC	-	LC9009CB3TR370DC	Vdet-IC	3.7V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
370DN	-	BL8509-370DNRM	Vdet-IC	3.7V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
370DN	-	LC9009CB3TR370DN	Vdet-IC	3.7V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
370EC	-	BL8509-370ECRM	Vdet-IC	3.7V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
370EC	-	LC9009CB3TR370EC	Vdet-IC	3.7V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
370EN	-	BL8509-370ENRM	Vdet-IC	3.7V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
370EN	-	LC9009CB3TR370EN	Vdet-IC	3.7V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
370FC	-	BL8509-370FCRM	Vdet-IC	3.7V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
370FC	-	LC9009CB3TR370FC	Vdet-IC	3.7V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
370FN	-	BL8509-370FNRM	Vdet-IC	3.7V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
370FN	-	LC9009CB3TR370FN	Vdet-IC	3.7V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
370GC	-	BL8509-370GCRM	Vdet-IC	3.7V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
370GC	-	LC9009CB3TR370GC	Vdet-IC	3.7V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
370GN	-	BL8509-370GNRM	Vdet-IC	3.7V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
370GN	-	LC9009CB3TR370GN	Vdet-IC	3.7V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
37-2	-	UTC8137-2	Vdet-IC	3.7V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
37-3	-	UTC8137-3	Vdet-IC	3.7V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
37-5	-	UTC8137-5	Vdet-IC	3.7V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
37A	-	AAT60037A-S2	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
37B	-	AAT60037B-S2	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
37B	-	MMBZ5237BPT	Z-diode	7.790..8.610V, Izt=5mA, Zzt=7Ω, 225mW	SOT-23	16dc	-	3a	Chm
37C	-	AAT60037C-S2	Vdet-IC	3.7V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
37D	-	AAT60037D-S2	Vdet-IC	3.7V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
37S	-	MMBZ5237SPT	Z-diode	8.036..8.364V, Izt=5mA, Zzt=7Ω, 225mW	SOT-23	16dc	-	3a	Chm
37S	-	MMCZ5237SPT	Z-diode	8.036..8.364V, Izt=5mA, Zzt=7Ω, 225mW	SOT-346	16dc	-	3a	Chm
37T	-	TK71537AS	LVR-IC	LDO, 3.7V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
37X	-	XC6203P28AMR	LVR-IC	2.85V±2%, 400mA, Internal current limiter	SOT-23	16cg	VR1	3d	Tor
38	-	2SA1037MPT-Q	Si-pnp	AF, 60V, 150mA, 200mW, B=120..270, 140MHz	SOT-723	18ta	-	3a	Chm
38	-	AP8822N-08GA	Vdet-IC	0.8V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
38	-	AP8822N-08GT	Vdet-IC	0.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
38	-	AP8822N-08PA	Vdet-IC	0.8V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
38	-	AP8822N-08PT	Vdet-IC	0.8V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
38	-	ELM9738NBB	Vdet-IC	3.8V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
38	-	ELM9838BB	LVR-IC	3.8V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
38	-	PDTC143ZE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=4.7k/47k	SOT-416	16ta	-	3a	Nxp
380AC	-	BL8509-380ACRM	Vdet-IC	3.8V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
380AC	-	LC9009CB3TR380AC	Vdet-IC	3.8V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
380AN	-	BL8509-380ANRM	Vdet-IC	3.8V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
380AN	-	LC9009CB3TR380AN	Vdet-IC	3.8V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
380BC	-	BL8509-380BCRM	Vdet-IC	3.8V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
380BC	-	LC9009CB3TR380BC	Vdet-IC	3.8V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
380BN	-	BL8509-380BNRM	Vdet-IC	3.8V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
380BN	-	LC9009CB3TR380BN	Vdet-IC	3.8V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
380CC	-	BL8509-380CCRM	Vdet-IC	3.8V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
380CC	-	LC9009CB3TR380CC	Vdet-IC	3.8V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
380CN	-	BL8509-380CNRM	Vdet-IC	3.8V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
380CN	-	LC9009CB3TR380CN	Vdet-IC	3.8V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
380DC	-	BL8509-380DCRM	Vdet-IC	3.8V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
380DC	-	LC9009CB3TR380DC	Vdet-IC	3.8V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
380DN	-	BL8509-380DNRM	Vdet-IC	3.8V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
380DN	-	LC9009CB3TR380DN	Vdet-IC	3.8V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
380EC	-	BL8509-380ECRM	Vdet-IC	3.8V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
380EC	-	LC9009CB3TR380EC	Vdet-IC	3.8V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
380EN	-	BL8509-380ENRM	Vdet-IC	3.8V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
380EN	-	LC9009CB3TR380EN	Vdet-IC	3.8V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
380FC	-	BL8509-380FCRM	Vdet-IC	3.8V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
380FC	-	LC9009CB3TR380FC	Vdet-IC	3.8V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
380FN	-	BL8509-380FNRM	Vdet-IC	3.8V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
380FN	-	LC9009CB3TR380FN	Vdet-IC	3.8V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
380GC	-	BL8509-380GCRM	Vdet-IC	3.8V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
380GC	-	LC9009CB3TR380GC	Vdet-IC	3.8V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
380GN	-	BL8509-380GNRM	Vdet-IC	3.8V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
380GN	-	LC9009CB3TR380GN	Vdet-IC	3.8V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
38-2	-	UTC8138-2	Vdet-IC	3.8V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
38-3	-	UTC8138-3	Vdet-IC	3.8V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
38-5	-	UTC8138-5	Vdet-IC	3.8V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
38A	-	AAT60038A-S2	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
38B	-	AAT60038B-S2	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
38B	-	MMBZ5238BPT	Z-diode	8.265..9.135V, Izt=5mA, Zzt=7Ω, 225mW	SOT-23	16dc	-	3a	Chm
38C	-	AAT60038C-S2	Vdet-IC	3.8V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
38D	-	AAT60038D-S2	Vdet-IC	3.8V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
38N	-	STM1061N38W	Vdet-IC	3.8V±2%, -Reset ODO	SOT-323	16vda	VD6	3d	Ste
38N	-	STM1061N38WX	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Ste
38S	-	MMBZ5238SPT	Z-diode	8.526..8.874V, Izt=5mA, Zzt=7Ω, 225mW	SOT-23	16dc	-	3a	Chm
38S	-	MMCZ5238SPT	Z-diode	8.526..8.874V, Izt=5mA, Zzt=7Ω, 225mW	SOT-346	16dc	-	3a	Chm
38T	-	TK71538AS	LVR-IC	LDO, 3.8V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
39	-	2SA1037MPT-R	Si-pnp	AF, 60V, 150mA, 200mW, B=180..390, 140MHz	SOT-723	18ta	-	3a	Chm
39	-	AP8822N-09GA	Vdet-IC	0.9V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
39	-	AP8822N-09GT	Vdet-IC	0.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
39	-	AP8822N-09PA	Vdet-IC	0.9V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
39	-	AP8822N-09PT	Vdet-IC	0.9V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
39	-	ELM7619HBB	Vdet-IC	1.9V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
39	-	ELM9739NBB	Vdet-IC	3.9V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
39	-	ELM9839BB	LVR-IC	3.9V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
39	-	PDTA143TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1=4.7k	SOT-416	16ta	-	3a	Nxp
39	-	TZT3.9W	Z-diode	3.70..3.70V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3a	Ttr
39	-	Z02W3.9V	Z-diode	3.70..4.10V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3f	Kec
390	-	HZM3.9NB	Z-diode	3.7..4.1V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
390AC	-	BL8509-390ACRM	Vdet-IC	3.9V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
390AC	-	LC9009CB3TR390AC	Vdet-IC	3.9V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
390AN	-	BL8509-390ANRM	Vdet-IC	3.9V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
390AN	-	LC9009CB3TR390AN	Vdet-IC	3.9V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
390BC	-	BL8509-390BCRM	Vdet-IC	3.9V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
390BC	-	LC9009CB3TR390BC	Vdet-IC	3.9V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
390BN	-	BL8509-390BNRM	Vdet-IC	3.9V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
390BN	-	LC9009CB3TR390BN	Vdet-IC	3.9V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
390CC	-	BL8509-390CCRM	Vdet-IC	3.9V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
390CC	-	LC9009CB3TR390CC	Vdet-IC	3.9V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
390CN	-	BL8509-390CNRM	Vdet-IC	3.9V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
390CN	-	LC9009CB3TR390CN	Vdet-IC	3.9V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
390DC	-	BL8509-390DCRM	Vdet-IC	3.9V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
390DC	-	LC9009CB3TR390DC	Vdet-IC	3.9V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
390DN	-	BL8509-390DNRM	Vdet-IC	3.9V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
390DN	-	LC9009CB3TR390DN	Vdet-IC	3.9V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
390EC	-	BL8509-390ECRM	Vdet-IC	3.9V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
390EC	-	LC9009CB3TR390EC	Vdet-IC	3.9V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
390EN	-	BL8509-390ENRM	Vdet-IC	3.9V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
390EN	-	LC9009CB3TR390EN	Vdet-IC	3.9V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
390FC	-	BL8509-390FCRM	Vdet-IC	3.9V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
390FC	-	LC9009CB3TR390FC	Vdet-IC	3.9V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
390FN	-	BL8509-390FNRM	Vdet-IC	3.9V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
390FN	-	LC9009CB3TR390FN	Vdet-IC	3.9V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
390GC	-	BL8509-390GCRM	Vdet-IC	3.9V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
390GC	-	LC9009CB3TR390GC	Vdet-IC	3.9V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
390GN	-	BL8509-390GNRM	Vdet-IC	3.9V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
390GN	-	LC9009CB3TR390GN	Vdet-IC	3.9V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
391	-	HZM3.9NB1	Z-diode	3.7..3.97V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
391	-	PZM3.9NB1	Z-diode	3.9V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
392	-	HZM3.9NB2	Z-diode	3.87..4.1V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
392	-	PZM3.9NB2	Z-diode	3.9V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
39-2	-	UTC8139-2	Vdet-IC	3.9V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
39-3	-	UTC8139-3	Vdet-IC	3.9V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
39-5	-	UTC8139-5	Vdet-IC	3.9V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
39A	-	AAT60039A-S2	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
39B	-	AAT60039B-S2	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
39B	-	MMBZ5239BPT	Z-diode	8.645..9.555V, Izt=5mA, Zzt=10Ω, 225mW	SOT-23	16dc	-	3a	Chm
39C	-	AAT60039C-S2	Vdet-IC	3.9V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
39D	-	AAT60039D-S2	Vdet-IC	3.9V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
39H	-	BZX84C3V9-V	Z-diode	3.70..4.10V, Izt=5mA, Zzt=130Ω, 300mW	SOT-23	16dc	-	3f	Kec
39S	-	MMBZ5239SPT	Z-diode	8.918..9.282V, Izt=5mA, Zzt=10Ω, 225mW	SOT-23	16dc	-	3a	Chm
39S	-	MMCZ5239SPT	Z-diode	8.918..9.282V, Izt=5mA, Zzt=10Ω, 225mW	SOT-346	16dc	-	3a	Chm
39T	-	TK71539AS	LVR-IC	LDO, 3.9V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
39V	-	PZM39NB	Z-diode	39V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
39V	-	PZM39NB1	Z-diode	39V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
39X	-	TZT3.9XW	Z-diode	3.87..4.10V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3a	Ttr
39X	-	Z02W3.9VX	Z-diode	3.70..3.97V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3f	Kec
39Z	-	02CZ39Z	Z-diode	37.0..41.0V, Izt=2mA, 200mW	SC-59	16dc	-	3a	Tos
39Z	-	CZ1W39	Z-diode	39V±5%, Izt=6.5mA, 600mW	SOT-23	16dc	-	3a	Cdi
39Z	-	TZT3.9ZW	Z-diode	3.97..4.10V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3a	Ttr
39Z	-	Z02W3.9VZ	Z-diode	3.87..4.10V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3f	Kec
3A	-	2SC5472	Si-npn	HF-osc, 9V, 30mA, 150mW, B=80..200, 12GHz	SOT-323	16ta	-	3a	Pan
3A	-	2SC5474	Si-npn	HF-osc, 9V, 30mA, 150mW, B=80..200, 12GHz	SOT-416	16ta	-	3a	Pan
3A	-	BC856A	Si-pnp	GP, 80V, 100mA, 310mW, B=125..250, >150MHz	SOT-23	16ta	-	3a	Di
3A	-	BC856AT	Si-pnp	GP, 80V, 100mA, 250mW, B=125..250, >100MHz	SOT-416	16ta	-	3a	Phi
3A	-	BC856AW	Si-pnp	GP, 80V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3a	Ons
3A	-	CH706F-40PT	Si-diode	Dual, SBD, 45V, 30mA, Vf<0.37V(1mA)	SOT-323	16dl	-	3a	Chm
3A	-	FT511Aa	LVR-IC	LDO, 1.2V±2%, 400mA	SOT-23	16cq	VR1	3d	Fmd
3A	-	KST24	Si-npn	VHF-Mix., 40V, 100mA, 350mW, B>30, >620MHz	SOT-23	16ta	-	3a	Sam
3A	-	LM431N	Vref-IC	Adjust, Precision, Shunt, 2.44..2.55V±2.2%	SOT-23	16ra	RF2	3a	Ttr
3A-	-	BC856AW	Si-pnp	GP, 80V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3a	PhM
3A0	-	PZM3.0NB2A	Z-diode	Dual, 3.0V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
3A0	-	TC55RP302ECB	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
3A0	-	XC62FP3002M	LVR-IC	3.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
3A3	-	PZM3.3NB2A	Z-diode	Dual, 3.3V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
3A5	-	TC593002ECB	LVR-IC	LDO, -3.0V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
3A5	-	XC62KN302M	LVR-IC	LDO, -3.0V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
3A6	-	PZM3.6NB2A	Z-diode	Dual, 3.6V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
3A9	-	PZM3.9NB2A	Z-diode	Dual, 3.9V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
3AC2	-	81C30-P-AE3-2	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
3AC2G	-	81C30G-P-AE3-2	Vdet-IC	3.0V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
3AC2L	-	81C30L-P-AE3-2	Vdet-IC	3.0V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
3AC3	-	81C30-P-AE3-3	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
3AC3G	-	81C30G-P-AE3-3	Vdet-IC	3.0V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
3AC3L	-	81C30L-P-AE3-3	Vdet-IC	3.0V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
3AC5	-	81C30-P-AE3-5	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
3AC5G	-	81C30G-P-AE3-5	Vdet-IC	3.0V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
3AC5L	-	81C30L-P-AE3-5	Vdet-IC	3.0V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
3AG	-	2SA1324-GR	Si-pnp	GP, 50V, 150mA, B=200..400, >80MHz	SOT-23	16te	-	3a	Tos
3AN2	-	81N30-P-AE3-2	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
3AN2G	-	81N30G-P-AE3-2	Vdet-IC	3.0V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
3AN2L	-	81N30L-P-AE3-2	Vdet-IC	3.0V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
3AN3	-	81N30-P-AE3-3	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
3AN3G	-	81N30G-P-AE3-3	Vdet-IC	3.0V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
3AN3L	-	81N30L-P-AE3-3	Vdet-IC	3.0V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
3AN5	-	81N30-P-AE3-5	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
3AN5G	-	81N30G-P-AE3-5	Vdet-IC	3.0V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
3AN5L	-	81N30L-P-AE3-5	Vdet-IC	3.0V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
3AO	-	2SA1324-O	Si-pnp	GP, 50V, 150mA, B=70..140, >80MHz	SOT-23	16te	-	3a	Tos
3Ap	-	BC856A	Si-pnp	GP, 80V, 100mA, 250mW, B=125..250, >100MHz	SOT-23	16ta	-	3a	PhH



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3As	-	BC856A	Si-pnp	GP, 80V, 100mA, 330mW, B=125..250, 250MHz	SOT-23	16ta	-	3a	Sie
3At	-	BC856A	Si-pnp	GP, 80V, 100mA, 250mW, B=125..250, >100MHz	SOT-23	16ta	-	3a	PhM
3At	-	BC856AW	Si-pnp	GP, 80V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3a	PhH
3AW	-	BC856A	Si-pnp	GP, 80V, 100mA, 250mW, B=125..250, >100MHz	SOT-23	16ta	-	3a	PhC
3AW	-	BC856AW	Si-pnp	GP, 80V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3a	PhC
3AY	-	2SA1324-Y	Si-pnp	GP, 50V, 150mA, B=120..240, >80MHz	SOT-23	16te	-	3a	Tos
3B	-	2SD2620J	Si-npn	AF-Drv, 100V, 20mA, 125mW, 200MHz, B=400..1200	SSMini3-F1	18ta	-	3a	Pan
3B	-	BC856B	Si-pnp	GP, 80V, 100mA, 310mW, B=220..475, >150MHz	SOT-23	16ta	-	3a	Di
3B	-	BC856BT	Si-pnp	GP, 80V, 100mA, 250mW, B=220..475, >100MHz	SOT-416	16ta	-	3a	Phi
3B	-	BC856BW	Si-pnp	GP, 80V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3c	Inf
3B	-	CH450FPT	Si-diode	SBD, 45V, 100mA, Vf<0.45V(10mA)	SOT-323	16dc	-	3a	Chm
3B	-	CMBT918	Si-npn	VHF/UHF, 30V, 350mA, 225mW, B>20, >600MHz	SOT-23	16ta	-	3a	Cdi
3B	-	FMMT918	Si-npn	GP, 30V, 100mA, 330mW, B>20, >600MHz	SOT-23	16ta	-	3a	Zx
3B	-	FT511Ba	LVR-IC	LDO, 1.5V±2%, 400mA	SOT-23	16cq	VR1	3d	Fmd
3B	-	R3131N23EC	Vdet-IC	2.3V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
3B	-	RB461F	Si-diode	SBR, 20V, 700mA, Vf<0.49V(700mA)	SOT-323	16dc	-	3a	Rhm
3B	-	TMPT918	Si-npn	VHF/UHF, 30V, 50mA, 350mW, B>20, >600MHz	SOT-23	16ta	-	3a	All
3B-	-	BC856BW	Si-pnp	GP, 80V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3a	PhM
3B0	-	TC55RP312ECB	LVR-IC	LDO, 3.1V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
3B0	-	XC62FP3102M	LVR-IC	3.1V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
3B5	-	TC593102ECB	LVR-IC	LDO, -3.1V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
3B5	-	XC62KN312M	LVR-IC	LDO, -3.1V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
3BC2	-	81C31-P-AE3-2	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
3BC2G	-	81C31G-P-AE3-2	Vdet-IC	3.1V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
3BC2L	-	81C31L-P-AE3-2	Vdet-IC	3.1V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
3BC3	-	81C31-P-AE3-3	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
3BC3G	-	81C31G-P-AE3-3	Vdet-IC	3.1V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
3BC3L	-	81C31L-P-AE3-3	Vdet-IC	3.1V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
3BC5	-	81C31-P-AE3-5	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
3BC5G	-	81C31G-P-AE3-5	Vdet-IC	3.1V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
3BC5L	-	81C31L-P-AE3-5	Vdet-IC	3.1V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
3BG	-	2SA1325-GR	Si-pnp	GP, 120V, 100mA, B=200..400, 100MHz	SOT-23	16te	-	3a	Tos
3BL	-	2SA1325-BL	Si-pnp	GP, 120V, 100mA, B=120..240, 100MHz	SOT-23	16te	-	3a	Tos
3BN2	-	81N31-P-AE3-2	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
3BN2G	-	81N31G-P-AE3-2	Vdet-IC	3.1V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
3BN2L	-	81N31L-P-AE3-2	Vdet-IC	3.1V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
3BN3	-	81N31-P-AE3-3	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
3BN3G	-	81N31G-P-AE3-3	Vdet-IC	3.1V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
3BN3L	-	81N31L-P-AE3-3	Vdet-IC	3.1V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
3BN5	-	81N31-P-AE3-5	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
3BN5G	-	81N31G-P-AE3-5	Vdet-IC	3.1V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
3BN5L	-	81N31L-P-AE3-5	Vdet-IC	3.1V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
3Bp	-	BC856B	Si-pnp	GP, 80V, 100mA, 250mW, B=220..475, >100MHz	SOT-23	16ta	-	3a	PhH
3Bs	-	BC856B	Si-pnp	GP, 80V, 100mA, 330mW, B=220..475, 250MHz	SOT-23	16ta	-	3a	Sie
3Bt	-	BC856B	Si-pnp	GP, 80V, 100mA, 250mW, B=220..475, >100MHz	SOT-23	16ta	-	3a	PhM
3Bt	-	BC856BW	Si-pnp	GP, 80V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3a	PhH
3BW	-	BC856B	Si-pnp	GP, 80V, 100mA, 250mW, B=220..475, >100MHz	SOT-23	16ta	-	3a	PhC
3BW	-	BC856BW	Si-pnp	GP, 80V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3a	PhC
3C	-	CH451FPT	Si-diode	SBD, 40V, 100mA, Vf<0.55V(100mA)	SOT-323	16dc	-	3a	Chm
3C	-	FMMTA20R	Si-npn	GP, 40V, 100mA, 330mW, B=40..400, >125MHz	SOT-23	16te	-	3a	Zx
3C	-	FT511Ca	LVR-IC	LDO, 1.8V±2%, 400mA	SOT-23	16cq	VR1	3d	Fmd
3C	-	MMBT5179	Si-pnp	VHF, 20V, 500mW, 350mW, B>25, >900MHz	SOT-23	16ta	-	3a	Nsc
3C	-	R3131N33EC	Vdet-IC	3.3V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
3C0	-	TC55RP322ECB	LVR-IC	LDO, 3.2V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
3C0	-	XC62FP3202M	LVR-IC	3.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
3C25	-	LC3030CCB3TR25	DC-DC-IC	PFM, step-up, 2.5V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C26	-	LC3030CCB3TR26	DC-DC-IC	PFM, step-up, 2.6V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C27	-	LC3030CCB3TR27	DC-DC-IC	PFM, step-up, 2.7V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C28	-	LC3030CCB3TR28	DC-DC-IC	PFM, step-up, 2.8V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C29	-	LC3030CCB3TR29	DC-DC-IC	PFM, step-up, 2.9V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C30	-	LC3030CCB3TR30	DC-DC-IC	PFM, step-up, 3.0V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C31	-	LC3030CCB3TR31	DC-DC-IC	PFM, step-up, 3.1V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C32	-	LC3030CCB3TR32	DC-DC-IC	PFM, step-up, 3.2V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C33	-	LC3030CCB3TR33	DC-DC-IC	PFM, step-up, 3.3V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C34	-	LC3030CCB3TR34	DC-DC-IC	PFM, step-up, 3.4V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C35	-	LC3030CCB3TR35	DC-DC-IC	PFM, step-up, 3.5V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C36	-	LC3030CCB3TR36	DC-DC-IC	PFM, step-up, 3.6V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C37	-	LC3030CCB3TR37	DC-DC-IC	PFM, step-up, 3.7V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C38	-	LC3030CCB3TR38	DC-DC-IC	PFM, step-up, 3.8V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C39	-	LC3030CCB3TR39	DC-DC-IC	PFM, step-up, 3.9V±2%, 200mA	SOT-23	16br	DC5	3a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3C40	-	LC3030CCB3TR40	DC-DC-IC	PFM, step-up, 4.0V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C41	-	LC3030CCB3TR41	DC-DC-IC	PFM, step-up, 4.1V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C42	-	LC3030CCB3TR42	DC-DC-IC	PFM, step-up, 4.2V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C43	-	LC3030CCB3TR43	DC-DC-IC	PFM, step-up, 4.3V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C44	-	LC3030CCB3TR44	DC-DC-IC	PFM, step-up, 4.4V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C45	-	LC3030CCB3TR45	DC-DC-IC	PFM, step-up, 4.5V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C46	-	LC3030CCB3TR46	DC-DC-IC	PFM, step-up, 4.6V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C47	-	LC3030CCB3TR47	DC-DC-IC	PFM, step-up, 4.7V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C48	-	LC3030CCB3TR48	DC-DC-IC	PFM, step-up, 4.8V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C49	-	LC3030CCB3TR49	DC-DC-IC	PFM, step-up, 4.9V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C5	-	TC593202ECB	LVR-IC	LDO, -3.2V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
3C5	-	XC62KN322M	LVR-IC	LDO, -3.2V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
3C50	-	LC3030CCB3TR50	DC-DC-IC	PFM, step-up, 5.0V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C51	-	LC3030CCB3TR51	DC-DC-IC	PFM, step-up, 5.1V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C52	-	LC3030CCB3TR52	DC-DC-IC	PFM, step-up, 5.2V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C53	-	LC3030CCB3TR53	DC-DC-IC	PFM, step-up, 5.3V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C54	-	LC3030CCB3TR54	DC-DC-IC	PFM, step-up, 5.4V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C55	-	LC3030CCB3TR55	DC-DC-IC	PFM, step-up, 5.5V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C56	-	LC3030CCB3TR56	DC-DC-IC	PFM, step-up, 5.6V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C57	-	LC3030CCB3TR57	DC-DC-IC	PFM, step-up, 5.7V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C58	-	LC3030CCB3TR58	DC-DC-IC	PFM, step-up, 5.8V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C59	-	LC3030CCB3TR59	DC-DC-IC	PFM, step-up, 5.9V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3C60	-	LC3030CCB3TR60	DC-DC-IC	PFM, step-up, 6.0V±2%, 200mA	SOT-23	16br	DC5	3a	Lch
3CC2	-	81C32-P-AE3-2	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
3CC2G	-	81C32G-P-AE3-2	Vdet-IC	3.2V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
3CC2L	-	81C32L-P-AE3-2	Vdet-IC	3.2V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
3CC3	-	81C32-P-AE3-3	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
3CC3G	-	81C32G-P-AE3-3	Vdet-IC	3.2V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
3CC3L	-	81C32L-P-AE3-3	Vdet-IC	3.2V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
3CC5	-	81C32-P-AE3-5	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
3CC5G	-	81C32G-P-AE3-5	Vdet-IC	3.2V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
3CC5L	-	81C32L-P-AE3-5	Vdet-IC	3.2V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
3CN2	-	81N32-P-AE3-2	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
3CN2G	-	81N32G-P-AE3-2	Vdet-IC	3.2V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
3CN2L	-	81N32L-P-AE3-2	Vdet-IC	3.2V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
3CN3	-	81N32-P-AE3-3	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
3CN3G	-	81N32G-P-AE3-3	Vdet-IC	3.2V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
3CN3L	-	81N32L-P-AE3-3	Vdet-IC	3.2V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
3CN5	-	81N32-P-AE3-5	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
3CN5G	-	81N32G-P-AE3-5	Vdet-IC	3.2V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
3CN5L	-	81N32L-P-AE3-5	Vdet-IC	3.2V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
3CO	-	2SA1326-O	Si-pnp	GP, 35V, 500mA, 200mW, B=70..140, 200MHz	SOT-23	16te	-	3a	Tos
3CY	-	2SA1326-Y	Si-pnp	GP, 35V, 500mA, 200mW, B=120..240, 200MHz	SOT-23	16te	-	3a	Tos
3D	-	BC856	Si-pnp	GP, 80V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	Cdi
3D	-	CH715FPT	Si-diode	Dual, SBD, 40V, 30mA, Vf<0.37V(1mA)	SOT-323	16df	-	3a	Chm
3D	-	FT511Da	LVR-IC	LDO, 2.5V±2%, 400mA	SOT-23	16cq	VR1	3d	Fmd
3D	-	LMBTA44LT1G	Si-npn	HV, 400V, 200mA, 350mW, B=80..300, 50MHz	SOT-23	16ta	-	3a	Lrc
3D	-	MMBTH81	Si-pnp	UHF/VHF, 20V, 50mA, 225mW, B>60, >600MHz	SOT-23	16ta	-	3a	Mot
3D	-	R3131N43EC	Vdet-IC	4.3V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
3D	-	RB715F	Si-diode	Dual, Schottky Rectifier, 40V, 30mA, Vf<0.37V(1mA), 5pF	SOT-323	16dg	-	3a	Rhm
3D	-	RB715W	Si-diode	Dual, Schottky Rectifier, 40V, 30mA, Vf<0.37V(1mA), 5pF	SOT-523	16dg	-	3a	Rhm
3D-	-	BC856W	Si-pnp	GP, 80V, 100mA, 250mW, B=125..475, >100MHz	SOT-323	16ta	-	3a	PhM
3D0	-	TC55RP332ECB	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
3D0	-	XC62FP3302M	LVR-IC	3.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
3D5	-	TC593302ECB	LVR-IC	LDO, -3.3V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
3D5	-	XC62KN332M	LVR-IC	LDO, -3.3V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
3DC2	-	81C33-P-AE3-2	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
3DC2G	-	81C33G-P-AE3-2	Vdet-IC	3.3V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
3DC2L	-	81C33L-P-AE3-2	Vdet-IC	3.3V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
3DC3	-	81C33-P-AE3-3	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
3DC3G	-	81C33G-P-AE3-3	Vdet-IC	3.3V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
3DC3L	-	81C33L-P-AE3-3	Vdet-IC	3.3V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
3DC5	-	81C33-P-AE3-5	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
3DC5G	-	81C33G-P-AE3-5	Vdet-IC	3.3V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
3DC5L	-	81C33L-P-AE3-5	Vdet-IC	3.3V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
3DN2	-	81N33-P-AE3-2	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
3DN2G	-	81N33G-P-AE3-2	Vdet-IC	3.3V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
3DN2L	-	81N33L-P-AE3-2	Vdet-IC	3.3V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
3DN3	-	81N33-P-AE3-3	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
3DN3G	-	81N33G-P-AE3-3	Vdet-IC	3.3V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3DN3L	-	81N33L-P-AE3-3	Vdet-IC	3.3V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
3DN5	-	81N33-P-AE3-5	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
3DN5G	-	81N33G-P-AE3-5	Vdet-IC	3.3V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
3DN5L	-	81N33L-P-AE3-5	Vdet-IC	3.3V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
3Dp	-	BC856	Si-pnp	GP, 80V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	PhH
3Dt	-	BC856	Si-pnp	GP, 80V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	PhM
3Dt	-	BC856W	Si-pnp	GP, 80V, 100mA, 250mW, B=125..475, >100MHz	SOT-323	16ta	-	3a	PhH
3DW	-	BC856	Si-pnp	GP, 80V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	PhC
3DW	-	BC856W	Si-pnp	GP, 80V, 100mA, 250mW, B=125..475, >100MHz	SOT-323	16ta	-	3a	PhC
3E	-	2SA2021	Si-pnp	GP, 60V, 100mA, 100mW, B=180..390, 80MHz	SSSMini3	18ta	-	3a	Pan
3E	-	BC857A	Si-pnp	GP, 50V, 100mA, 310mW, B=110..220, >150MHz	SOT-23	16ta	-	3f	Ste
3E	-	BC857AF	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-490	18ta	-	3a	Phi
3E	-	BC857AT	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-416	18ta	-	3a	Phi
3E	-	BC857AW	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3a	Mot
3E	-	CH717FPT	Si-diode	Dual, SBD, 40V, 30mA, Vf<0.37V(1mA)	SOT-323	16dg	-	3a	Chm
3E	-	CM9NB857A	Si-pnp	AF, Sw, 50V, 100mA, 200mW, B=110..220, 100MHz	SOT-23	16ta	-	3a	Can
3E	-	CM9NB857AW	Si-pnp	AF, Sw, 50V, 100mA, 150mW, B=110..220, 100MHz	SOT-323	16ta	-	3a	Can
3E	-	CMBTH10	Si-npn	GP, 30V, 25mA, 225mW, B>60, >650MHz	SOT-23	16ta	-	3a	Cdi
3E	-	FMMTA42	Si-npn	Vid, 300/300V, 200mA, 330mW, B>40, >50MHz	SOT-23	16ta	-	3a	Zx
3E	-	KST10	Si-npn	GP, 30V, 25mA, 330mW, B>60, >650MHz	SOT-23	16ta	-	3a	Sam
3E	-	MMBTH10	Si-npn	RF, 30V, 25mA, 225mW, B>60, >650MHz	SOT-23	16ta	-	3a	Utc
3E	-	MMBTH10RG	Si-npn	RF, 30V, 25mA, 225mW, B>60, >650MHz	SOT-23	16ta	-	3a	F
3E	-	R3131N46EC5	Vdet-IC	4.6V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
3E	-	RB717F	Si-diode	Dual, Schottky Rectifier, 40V, 30mA, Vf<0.37V(1mA), 5pF	SOT-323	16df	-	3a	Rhm
3E-	-	BC857AW	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3a	PhM
3E0	-	TC55RP342ECB	LVR-IC	LDO, 3.4V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
3E0	-	XC62FP3402M	LVR-IC	3.4V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
3E5	-	TC593402ECB	LVR-IC	LDO, -3.4V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
3E5	-	XC62KN342M	LVR-IC	LDO, -3.4V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
3EC2	-	81C34-P-AE3-2	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
3EC2G	-	81C34G-P-AE3-2	Vdet-IC	3.4V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
3EC2L	-	81C34L-P-AE3-2	Vdet-IC	3.4V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
3EC3	-	81C34-P-AE3-3	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
3EC3G	-	81C34G-P-AE3-3	Vdet-IC	3.4V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
3EC3L	-	81C34L-P-AE3-3	Vdet-IC	3.4V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
3EC5	-	81C34-P-AE3-5	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
3EC5G	-	81C34G-P-AE3-5	Vdet-IC	3.4V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
3EC5L	-	81C34L-P-AE3-5	Vdet-IC	3.4V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
3EM	-	GMBTH10	Si-npn	RF, 30V, 25mA, 225mW, B>60, >650MHz	SOT-23	16ta	-	3a	Gsm
3EM	-	MMBTH10	Si-npn	RF, 30V, 25mA, 225mW, B>60, >650MHz	SOT-23	16ta	-	3a	Ons
3EN2	-	81N34-P-AE3-2	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
3EN2G	-	81N34G-P-AE3-2	Vdet-IC	3.4V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
3EN2L	-	81N34L-P-AE3-2	Vdet-IC	3.4V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
3EN3	-	81N34-P-AE3-3	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
3EN3G	-	81N34G-P-AE3-3	Vdet-IC	3.4V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
3EN3L	-	81N34L-P-AE3-3	Vdet-IC	3.4V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
3EN5	-	81N34-P-AE3-5	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
3EN5G	-	81N34G-P-AE3-5	Vdet-IC	3.4V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
3EN5L	-	81N34L-P-AE3-5	Vdet-IC	3.4V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
3Ep	-	BC857A	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-23	16ta	-	3a	PhH
3ER	-	BC857AR	Si-pnp	GP, 45V, 100mA, 250mW, B=220, >150MHz	SOT-23	16te	-	3a	Phi
3Es	-	BC857A	Si-pnp	GP, 50V, 100mA, 330mW, B=125..250, 250MHz	SOT-23	16ta	-	3a	Sie
3Es	-	BC857AW	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3a	Sie
3Et	-	BC857A	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-23	16ta	-	3a	PhM
3Et	-	BC857AW	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3a	PhH
3EW	-	BC857A	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-23	16ta	-	3a	PhC
3EW	-	BC857AW	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3a	PhC
3EZ	-	FMMTA10	Si-npn	Sw, 30V, 25mA, 330mW, B>60, >650MHz	SOT-23	16ta	-	3a	Zx
3EZ	-	FMMTH10	Si-npn	GP, 30V, 25mA, 330mW, B>60, >650MHz	SOT-23	16ta	-	3a	Zx
3F	-	2SD5609	Si-npn	AF-Amp, 60V, 100mA, 200mW, B=180..390, 80MHz	SSSMini3	18ta	-	3a	Pan
3F	-	BC857B	Si-pnp	GP, 50V, 100mA, 310mW, B=220..475, >150MHz	SOT-23	16ta	-	3f	Ste
3F	-	BC857BF	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-490	18ta	-	3a	Phi
3F	-	BC857BT	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-416	16ta	-	3a	Phi
3F	-	BC857BW	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3a	Ons
3F	-	CH461FPT	Si-diode	SBD, 25V, 700mA, Vf<0.49V(700mA)	SOT-323	16dc	-	3a	Chm
3F	-	CM9NB857B	Si-pnp	AF, Sw, 50V, 100mA, 200mW, B=200..450, 100MHz	SOT-23	16ta	-	3a	Can
3F	-	CM9NB857BW	Si-pnp	AF, Sw, 50V, 100mA, 150mW, B=200..450, 100MHz	SOT-323	16ta	-	3a	Can
3F-	-	BC857BW	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3a	PhM
3F0	-	TC55RP352ECB	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
3F0	-	XC62FP3502M	LVR-IC	3.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3F5	-	TC593502ECB	LVR-IC	LDO, -3.5V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
3F5	-	XC62KN352M	LVR-IC	LDO, -3.5V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
3FC2	-	81C35-P-AE3-2	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
3FC2G	-	81C35G-P-AE3-2	Vdet-IC	3.5V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
3FC2L	-	81C35L-P-AE3-2	Vdet-IC	3.5V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
3FC3	-	81C35-P-AE3-3	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
3FC3G	-	81C35G-P-AE3-3	Vdet-IC	3.5V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
3FC3L	-	81C35L-P-AE3-3	Vdet-IC	3.5V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
3FC5	-	81C35-P-AE3-5	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
3FC5G	-	81C35G-P-AE3-5	Vdet-IC	3.5V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
3FC5L	-	81C35L-P-AE3-5	Vdet-IC	3.5V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
3FN2	-	81N35-P-AE3-2	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
3FN2G	-	81N35G-P-AE3-2	Vdet-IC	3.5V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
3FN2L	-	81N35L-P-AE3-2	Vdet-IC	3.5V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
3FN3	-	81N35-P-AE3-3	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
3FN3G	-	81N35G-P-AE3-3	Vdet-IC	3.5V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
3FN3L	-	81N35L-P-AE3-3	Vdet-IC	3.5V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
3FN5	-	81N35-P-AE3-5	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
3FN5G	-	81N35G-P-AE3-5	Vdet-IC	3.5V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
3FN5L	-	81N35L-P-AE3-5	Vdet-IC	3.5V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
3Fp	-	BC857B	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-23	16ta	-	3a	PhH
3FR	-	BC857BR	Si-pnp	GP, 45V, 100mA, 200mW, B=220..475, >150MHz	SOT-23	16te	-	3a	Phi
3Fs	-	BC857B	Si-pnp	GP, 50V, 100mA, 330mW, B=220..475, 250MHz	SOT-23	16ta	-	3a	Sie
3Ft	-	BC857B	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-23	16ta	-	3a	PhM
3Ft	-	BC857BW	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3a	PhH
3FW	-	BC857B	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-23	16ta	-	3a	PhC
3FW	-	BC857BW	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3a	PhC
3G	-	BAT54WPT	Si-diode	SBD, 30V, 200mA, Vf<1V(100mA), 5ns	SOT-323	16dc	-	3a	Chm
3G	-	BC857C	Si-pnp	GP, 50V, 100mA, 310mW, B=420..800, >150MHz	SOT-23	16ta	-	3f	Di
3G	-	BC857CF	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-490	18ta	-	3a	Phi
3G	-	BC857CT	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-416	16ta	-	3a	Phi
3G	-	BC857CW	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-323	16ta	-	3c	Inf
3G	-	CM9NB857C	Si-pnp	AF, Sw, 50V, 100mA, 200mW, B=4520..800, 100MHz	SOT-23	16ta	-	3a	Can
3G	-	CM9NB857CW	Si-pnp	AF, Sw, 50V, 100mA, 150mW, B=4520..800, 100MHz	SOT-323	16ta	-	3a	Can
3G	-	R3131N23EA	Vdet-IC	2.3V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
3G-	-	BC857CW	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	PhM
3GC2	-	81C36-P-AE3-2	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
3GC2G	-	81C36G-P-AE3-2	Vdet-IC	3.6V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
3GC2L	-	81C36L-P-AE3-2	Vdet-IC	3.6V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
3GC3	-	81C36-P-AE3-3	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
3GC3G	-	81C36G-P-AE3-3	Vdet-IC	3.6V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
3GC3L	-	81C36L-P-AE3-3	Vdet-IC	3.6V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
3GC5	-	81C36-P-AE3-5	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
3GC5G	-	81C36G-P-AE3-5	Vdet-IC	3.6V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
3GC5L	-	81C36L-P-AE3-5	Vdet-IC	3.6V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
3GN2	-	81N36-P-AE3-2	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
3GN2G	-	81N36G-P-AE3-2	Vdet-IC	3.6V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
3GN2L	-	81N36L-P-AE3-2	Vdet-IC	3.6V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
3GN3	-	81N36-P-AE3-3	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
3GN3G	-	81N36G-P-AE3-3	Vdet-IC	3.6V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
3GN3L	-	81N36L-P-AE3-3	Vdet-IC	3.6V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
3GN5	-	81N36-P-AE3-5	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
3GN5G	-	81N36G-P-AE3-5	Vdet-IC	3.6V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
3GN5L	-	81N36L-P-AE3-5	Vdet-IC	3.6V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
3Gp	-	BC857C	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhH
3GR	-	BC857CR	Si-pnp	GP, 45V, 100mA, 200mW, B=420..800, >150MHz	SOT-23	16te	-	3a	Phi
3Gs	-	BC857C	Si-pnp	GP, 50V, 100mA, 330mW, B=420..800, 250MHz	SOT-23	16ta	-	3a	Sie
3Gt	-	BC857C	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhM
3Gt	-	BC857CW	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	PhH
3GW	-	BC857C	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhC
3GW	-	BC857CW	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	PhC
3H	-	BAT54WAPT	Si-diode	Dual, SBD, 30V, 200mA, Vf<1V(100mA), 5ns	SOT-323	16df	-	3a	Chm
3H	-	BC857	Si-pnp	GP, 50V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	Cdi
3H	-	R3131N33EA	Vdet-IC	3.3V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
3H-	-	BC857W	Si-pnp	GP, 50V, 100mA, 250mW, B=125..800, >100MHz	SOT-323	16ta	-	3a	PhM
3H0	-	TC55RP362ECB	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
3H0	-	XC62FP3602M	LVR-IC	3.6V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
3H5	-	TC593602ECB	LVR-IC	LDO, -3.6V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
3H5	-	XC62KN362M	LVR-IC	LDO, -3.6V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
3HC2	-	81C37-P-AE3-2	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3HC2G	-	81C37G-P-AE3-2	Vdet-IC	3.7V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
3HC2L	-	81C37L-P-AE3-2	Vdet-IC	3.7V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
3HC3	-	81C37-P-AE3-3	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
3HC3G	-	81C37G-P-AE3-3	Vdet-IC	3.7V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
3HC3L	-	81C37L-P-AE3-3	Vdet-IC	3.7V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
3HC5	-	81C37-P-AE3-5	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
3HC5G	-	81C37G-P-AE3-5	Vdet-IC	3.7V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
3HC5L	-	81C37L-P-AE3-5	Vdet-IC	3.7V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
3HN2	-	81N37-P-AE3-2	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
3HN2G	-	81N37G-P-AE3-2	Vdet-IC	3.7V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
3HN2L	-	81N37L-P-AE3-2	Vdet-IC	3.7V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
3HN3	-	81N37-P-AE3-3	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
3HN3G	-	81N37G-P-AE3-3	Vdet-IC	3.7V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
3HN3L	-	81N37L-P-AE3-3	Vdet-IC	3.7V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
3HN5	-	81N37-P-AE3-5	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
3HN5G	-	81N37G-P-AE3-5	Vdet-IC	3.7V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
3HN5L	-	81N37L-P-AE3-5	Vdet-IC	3.7V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
3Hp	-	BC857	Si-pnp	GP, 50V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	PhH
3Ht	-	BC857	Si-pnp	GP, 50V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	PhM
3Ht	-	BC857CW	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	Phi
3Ht	-	BC857W	Si-pnp	GP, 50V, 100mA, 250mW, B=125..800, >100MHz	SOT-323	16ta	-	3a	PhH
3HW	-	BC857	Si-pnp	GP, 50V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	PhC
3HW	-	BC857W	Si-pnp	GP, 50V, 100mA, 250mW, B=125..800, >100MHz	SOT-323	16ta	-	3a	PhC
3I	-	BAT54WCPT	Si-diode	Dual, SBD, 30V, 200mA, Vf<1V(100mA), 5ns	SOT-323	16dg	-	3a	Chm
3J	-	BAT54WSPT	Si-diode	Dual, SBD, 30V, 200mA, Vf<1V(100mA), 5ns	SOT-323	16dl	-	3a	Chm
3J	-	BC858A	Si-pnp	GP, 30V, 100mA, 310mW, B=110..220, >150MHz	SOT-23	16ta	-	3a	Ste
3J	-	BC858AT	Si-pnp	GP, 30V, 100mA, 250mW, B=125..250, >100MHz	SOT-416	16ta	-	3a	Phi
3J	-	BC858AW	Si-pnp	GP, 30V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3a	Ons
3J	-	R3131N43EA	Vdet-IC	4.3V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
3J	-	RB706F-40	Si-diode	Dual, Schottky Rectifier, 40V, 30mA, Vf<0.37V(1mA), 5pF	SOT-323	16dj	-	3a	Rhm
3J-	-	BC858AW	Si-pnp	GP, 30V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3a	PhM
3JC2	-	81C38-P-AE3-2	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
3JC2G	-	81C38G-P-AE3-2	Vdet-IC	3.8V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
3JC2L	-	81C38L-P-AE3-2	Vdet-IC	3.8V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
3JC3	-	81C38-P-AE3-3	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
3JC3G	-	81C38G-P-AE3-3	Vdet-IC	3.8V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
3JC3L	-	81C38L-P-AE3-3	Vdet-IC	3.8V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
3JC5	-	81C38-P-AE3-5	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
3JC5G	-	81C38G-P-AE3-5	Vdet-IC	3.8V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
3JC5L	-	81C38L-P-AE3-5	Vdet-IC	3.8V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
3JN2	-	81N38-P-AE3-2	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
3JN2G	-	81N38G-P-AE3-2	Vdet-IC	3.8V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
3JN2L	-	81N38L-P-AE3-2	Vdet-IC	3.8V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
3JN3	-	81N38-P-AE3-3	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
3JN3G	-	81N38G-P-AE3-3	Vdet-IC	3.8V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
3JN3L	-	81N38L-P-AE3-3	Vdet-IC	3.8V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
3JN5	-	81N38-P-AE3-5	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
3JN5G	-	81N38G-P-AE3-5	Vdet-IC	3.8V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
3JN5L	-	81N38L-P-AE3-5	Vdet-IC	3.8V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
3Jp	-	BC858A	Si-pnp	GP, 30V, 100mA, 250mW, B=125..250, >100MHz	SOT-23	16ta	-	3a	PhH
3JR	-	BC858AR	Si-pnp	GP, 30V, 100mA, 250mW, B=220, >150MHz	SOT-23	16te	-	3a	Phi
3Js	-	BC858A	Si-pnp	GP, 30V, 100mA, 330mW, B=125..250, 250MHz	SOT-23	16ta	-	3a	Sie
3Js	-	BC858AW	Si-pnp	GP, 30V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3a	Sie
3Jt	-	BC858AW	Si-pnp	GP, 30V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3a	PhH
3JW	-	BC858A	Si-pnp	GP, 30V, 100mA, 250mW, B=125..250, >100MHz	SOT-23	16ta	-	3a	PhC
3JW	-	BC858AW	Si-pnp	GP, 30V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3a	PhC
3K	-	BC858B	Si-pnp	GP, 30V, 100mA, 310mW, B=200..450, >150MHz	SOT-23	16ta	-	3a	Ste
3K	-	BC858BT	Si-pnp	GP, 30V, 100mA, 250mW, B=220..475, >100MHz	SOT-416	16ta	-	3a	Phi
3K	-	BC858BW	Si-pnp	GP, 30V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3c	Inf
3K	-	CH858BPT-R	Si-pnp	AF, Sw, 30V, 100mA, B=220..475, 200MHz	SOT-23	16ta	-	3a	Chm
3K	-	R3131N46EA5	Vdet-IC	4.6V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
3K-	-	BC858BW	Si-pnp	GP, 30V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3a	PhM
3K0	-	TC55RP372ECB	LVR-IC	LDO, 3.7V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
3K0	-	XC62FP3702M	LVR-IC	3.7V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
3K5	-	TC593702ECB	LVR-IC	LDO, -3.7V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
3K5	-	XC62KN372M	LVR-IC	LDO, -3.7V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
3KC2	-	81C39-P-AE3-2	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
3KC2G	-	81C39G-P-AE3-2	Vdet-IC	3.9V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
3KC2L	-	81C39L-P-AE3-2	Vdet-IC	3.9V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
3KC3	-	81C39-P-AE3-3	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3KC3G	-	81C39G-P-AE3-3	Vdet-IC	3.9V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
3KC3L	-	81C39L-P-AE3-3	Vdet-IC	3.9V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
3KC5	-	81C39-P-AE3-5	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
3KC5G	-	81C39G-P-AE3-5	Vdet-IC	3.9V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
3KC5L	-	81C39L-P-AE3-5	Vdet-IC	3.9V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
3KN2	-	81N39-P-AE3-2	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
3KN2G	-	81N39G-P-AE3-2	Vdet-IC	3.9V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
3KN2L	-	81N39L-P-AE3-2	Vdet-IC	3.9V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
3KN3	-	81N39-P-AE3-3	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
3KN3G	-	81N39G-P-AE3-3	Vdet-IC	3.9V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
3KN3L	-	81N39L-P-AE3-3	Vdet-IC	3.9V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
3KN5	-	81N39-P-AE3-5	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
3KN5G	-	81N39G-P-AE3-5	Vdet-IC	3.9V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
3KN5L	-	81N39L-P-AE3-5	Vdet-IC	3.9V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
3Kp	-	BC858B	Si-pnp	GP, 30V, 100mA, 250mW, B=220..475, >100MHz	SOT-23	16ta	-	3a	PhH
3KR	-	BC858BR	Si-pnp	GP, 30V, 100mA, 200mW, B=475, >150MHz	SOT-23	16te	-	3a	Phi
3Ks	-	BC858B	Si-pnp	GP, 30V, 100mA, 330mW, B=220..475, 250MHz	SOT-23	16ta	-	3a	Sie
3Kt	-	BC858BW	Si-pnp	GP, 30V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3a	PhH
3KW	-	BC858B	Si-pnp	GP, 30V, 100mA, 250mW, B=220..475, >100MHz	SOT-23	16ta	-	3a	PhC
3KW	-	BC858BW	Si-pnp	GP, 30V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3a	PhC
3L	-	BC858C	Si-pnp	GP, 30V, 100mA, 310mW, B=420..800, >150MHz	SOT-23	16ta	-	3a	Di
3L	-	BC858CT	Si-pnp	GP, 30V, 100mA, 250mW, B=420..800, >100MHz	SOT-416	16ta	-	3a	Phi
3L	-	BC858CW	Si-pnp	GP, 30V, 100mA, 300mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	Mot
3L	-	R3131N29AC3	Vdet-IC	2.9V±1.5%, +Reset ODO, 50ms	SOT-23	16vdc	VD6	3b	Ric
3L0	-	TC55RP382ECB	LVR-IC	LDO, 3.8V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
3L0	-	XC62FP3802M	LVR-IC	3.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
3L5	-	TC593802ECB	LVR-IC	LDO, -3.8V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
3L5	-	XC62KN382M	LVR-IC	LDO, -3.8V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
3Lp	-	BC858C	Si-pnp	GP, 30V, 100mA, 250mW, B=420..800, >100Hz	SOT-23	16ta	-	3a	PhH
3LP	-	2SK608-P	n-FET	FM-Tuner, 30V, 20mA, 20mW, Idss=0.5..5mA, Up<3V	SOT-23	16fa	-	3a	Pan
3LQ	-	2SK608-Q	n-FET	FM-Tuner, 30V, 20mA, 20mW, Idss=4..10mA, Up<3V	SOT-23	16fa	-	3a	Pan
3LR	-	2SK608-R	n-FET	FM-Tuner, 30V, 20mA, 20mW, Idss=9..15mA, Up<3V	SOT-23	16fa	-	3a	Pan
3LR	-	BC858CR	Si-pnp	GP, 30V, 100mA, 250mW, B=800, >150MHz	SOT-23	16te	-	3a	Phi
3Ls	-	BC858C	Si-pnp	GP, 30V, 100mA, 330mW, B=420..800, 250MHz	SOT-23	16ta	-	3a	Sie
3Ls	-	BC858CW	Si-pnp	GP, 30V, 100mA, 300mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	Sie
3LS	-	2SK608-S	n-FET	FM-Tuner, 30V, 20mA, 20mW, Idss=14..20mA, Up<3V	SOT-23	16fa	-	3a	Pan
3Lt	-	BC858CW	Si-pnp	GP, 30V, 100mA, 300mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	Phi
3LW	-	BC858C	Si-pnp	GP, 30V, 100mA, 250mW, B=420..800, >100Hz	SOT-23	16ta	-	3a	PhC
3m	-	FMMT5087R	Si-pnp	AF, 50V, 100mA, 330mW, B=200..600, >40MHz	SOT-23	16te	-	3a	Zx
3M	-	2SC3829	Si-npn	UHF, 15V, 80mA, 200mW, B=50..300, 6GHz	SC-59	16ta	-	3a	Pan
3M	-	2SC4808	Si-npn	UHF, LN, 15V, 80mA, 125mW, B=50..300, 6GHz	SOT-416	16ta	-	3a	Pan
3M	-	BC858	Si-pnp	GP, 30V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	Cdi
3M	-	CH715WPT	Si-diode	Dual, SBD, 40V, 30mA, Vf<0.37V(1mA)	SOT-416	16df	-	3a	Chm
3M	-	NSF2250WT1	Si-npn	VHF/UHF Osc/Mix, 30V, 50mA, 200mW, B=150..250, 2.3GHz	SOT-323	16ta	-	3a	Ons
3M	-	R3131N29BC3	Vdet-IC	2.9V±1.5%, +Reset ODO, 100ms	SOT-23	16vdc	VD6	3b	Ric
3M0	-	TC55RP392ECB	LVR-IC	LDO, 3.9V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
3M0	-	XC62FP3902M	LVR-IC	3.9V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
3M3	-	CESD3V3AP	ESDP-diode	Dual, Vbr=5.0..5.9V, Vrwm=3.3V, Ipp=13.3A, 300W(1ms)	SOT-23	16df	-	3a	Jce
3M5	-	TC593902ECB	LVR-IC	LDO, -3.9V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
3M5	-	XC62KN392M	LVR-IC	LDO, -3.9V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
3Mp	-	BC858	Si-pnp	GP, 30V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	PhH
3MQ	-	2SC4835-Q	Si-npn	UHF, LN, 15V, 80mA, 150mW, B=50..100, 6GHz	SOT-323	16ta	-	3a	Pan
3MR	-	2SC4835-R	Si-npn	UHF, LN, 15V, 80mA, 150mW, B=80..130, 6GHz	SOT-323	16ta	-	3a	Pan
3MS	-	2SC4835-S	Si-npn	UHF, LN, 15V, 80mA, 150mW, B=100..200, 6GHz	SOT-323	16ta	-	3a	Pan
3Mt	-	BC858W	Si-pnp	GP, 30V, 100mA, 300mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	Phi
3MW	-	BC858	Si-pnp	GP, 30V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	PhC
3N	-	2SK0620	n-MOSFET	Sw, 50V, 100mA, 150mW, <50Ω(20mA), Int.Di (S > G)	SC-59	16fh	-	3a	Pan
3N	-	2SK0664	n-MOSFET	Sw, 50V, 100mA, 150mW, <50Ω(20mA), 10/20ns	SOT-323	16fh	-	3a	Pan
3N	-	2SK620	n-MOSFET	Sw, 50V, 100mA, 150mW, <50Ω(20mA), Int.Di (S > G)	SC-59	16fh	-	3a	Pan
3N	-	2SK664	n-MOSFET	Sw, 50V, 100mA, 150mW, <50Ω(20mA), 10/20ns	SOT-323	16fh	-	3a	Pan
3N	-	CH548TSPT	Si-diode	Dual, SBD, 30V, 100mA, Vf<0.45V(10mA)	SOT-416	16dl	-	3a	Chm
3N	-	MMBT3906	Si-pnp	Sw, AF, 60/40V, 100mA, 200mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Vs
3N	-	MMBT3906T	Si-pnp	Sw, AF, 60/40V, 100mA, 200mW, B=100..300, >250MHz	SOT-323	16ta	-	3d	Di
3N	-	R3131N29DC3	Vdet-IC	2.9V±1.5%, +Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Ric
3O	-	2SC4497-O	Si-npn	HV, 300V, 100mA, 200mW, B=50..150, 70MHz	SC-59	16ta	-	3a	Tos
3O	-	2SK0665	n-MOSFET	Sw, 20V, 100mA, 150mW, <50Ω(20mA), 1/1µs	SOT-323	16fh	-	3a	Pan
3O	-	2SK621	n-MOSFET	Int.Di+R (S > G), V-MOS, 20V, ±100mA	SOT-23	16fh	-	3a	Pan
3O	-	2SK665	n-MOSFET	Sw, 20V, 100mA, 150mW, <50Ω(20mA), 1/1µs	SOT-323	16fh	-	3a	Pan
3P	-	2N7002	n-MOSFET	TMOS, 60V, 115mA, 200mW, 1.2Ω(500mA), 20/20ns	SOT-23	16fh	-	3a	Gal
3P	-	FMMT2222AR	Si-npn	GP, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Zx



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3P	-	R3131N29HC3	Vdet-IC	2.9V±1.5%, +Reset ODO, 400ms	SOT-23	16vdc	VD6	3b	Ric
3Q	-	R3131N29AA3	Vdet-IC	2.9V±1.5%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3b	Ric
3R	-	2SC4497-R	Si-npn	HV, 300V, 100mA, 200mW, B=30..90, 70MHz	SC-59	16ta	-	3a	Tos
3R	-	2SD5580	Si-npn	HF-osc/Sw, 15V, 50mA, 150mW, B=100..350, 1.1GHz	SOT-323	16ta	-	3a	Pan
3R	-	MMBT5751	Si-pnp	Sw, 15V, 200mA, 225mW, B=50..120, 15/20ns	SOT-23	16ta	-	3a	Nsc
3R	-	PDTA124EEF	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k	SOT-490	18ta	-	3a	Nxp
3R	-	PDTA124TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1=22k	SOT-416	16ta	-	3a	Nxp
3R	-	R3131N29BA3	Vdet-IC	2.9V±1.5%, +Reset PPO, 100ms	SOT-23	16vdc	VD7	3b	Ric
3R	-	SRA2203E	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=22k/22k	SOT-523	16ta	-	3a	Auk
3R	-	SRA2203EF	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=22k/22k	SOT-523F	18ta	-	3a	Auk
3R	-	SRA2203U	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/22k	SOT-323	16ta	-	3a	Auk
3R	-	SRA2203UF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/22k	SOT-323F	18ta	-	3a	Auk
3S	-	2SC3904	Si-npn	UHF-amp, 15V, 65mA, 200mW, B=50..300, 8.5GHz	SC-59	16ta	-	3a	Pan
3S	-	2SC4805	Si-npn	VHF/UHF, 15V, 65mA, 150mW, 8.5GHz, B=50..300	SOT-323	16ta	-	3a	Pan
3S	-	MMBT5551	Si-npn	HV, 180V, 200mA, 350mW, B=80..250, >300MHz	SOT-23	16ta	-	3a	Nsc
3S	-	R3131N29DA3	Vdet-IC	2.9V±1.5%, +Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Ric
3SQ	-	2SC4805-Q	Si-npn	VHF/UHF, 15V, 65mA, 150mW, 8.5GHz, B=50..120	SOT-323	16ta	-	3a	Pan
3SQ	-	2SC5295-Q	Si-npn	HF, LN, 15V, 65mA, 150mW, B=50..120, 8.5GHz	SOT-416	16ta	-	3a	Pan
3SR	-	2SC4805-R	Si-npn	VHF/UHF, 15V, 65mA, 150mW, 8.5GHz, B=100..170	SOT-323	16ta	-	3a	Pan
3SR	-	2SC5295-R	Si-npn	HF, LN, 15V, 65mA, 150mW, B=100..170, 8.5GHz	SOT-416	16ta	-	3a	Pan
3SS	-	2SC4805-S	Si-npn	VHF/UHF, 15V, 65mA, 150mW, 8.5GHz, B=150..300	SOT-323	16ta	-	3a	Pan
3SS	-	2SC5295-S	Si-npn	HF, LN, 15V, 65mA, 150mW, B=150..300, 8.5GHz	SOT-416	16ta	-	3a	Pan
3SS	-	MMBTA28	Si-npn-Darl	GP, 80V, 500mA, 500mW, B>10000, >100MHz	SOT-23	16ta	-	3a	Nsc
3T	-	HT3	Si-pnp	GP, 90V, 100mA, 300mW, <500/2000ns	SOT-23	16ta	-	3a	Fer
3T	-	R3131N29HA3	Vdet-IC	2.9V±1.5%, +Reset PPO, 400ms	SOT-23	16vdc	VD7	3b	Ric
3U	-	2SC3967	Si-npn	UHF, 30V, 20mA, 200mW, B=40..200, 1.5GHz	SOT-23	16ta	-	3a	Pan
3U	-	2SC4068	Si-npn	UHF, 30V, 20mA, ,150mW, B=40..200, 1.5GHz	SOT-323	16ta	-	3a	Pan
3V	-	BC857AT	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-416	16ta	-	3a	Di
3V0	-	PZM3.0NB	Z-diode	3.0V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
3V3	-	PZM3.3NB	Z-diode	3.3V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
3V6	-	CHPZ3V6PT	Z-diode	Dual, 3.4..3.8V, Izt=5mA, Zzt=95Ω, 350mW	SOT-23	16df	-	3a	Chm
3V6	-	PZM3.6NB	Z-diode	3.6V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
3V9	-	CHPZ3V9PT	Z-diode	Dual, 3.7..4.1V, Izt=5mA, Zzt=90Ω, 350mW	SOT-23	16df	-	3a	Chm
3V9	-	PZM3.9NB	Z-diode	3.9V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
3VR	-	2SB1679-R	Si-pnp	AF, 15V, 500mA, 150mW, B=130..220, 130MHz	SOT-323	16ta	-	3a	Pan
3VS	-	2SB1679-S	Si-pnp	AF, 15V, 500mA, 150mW, B=180..350, 130MHz	SOT-323	16ta	-	3a	Pan
3W	-	BC857BT	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-416	16ta	-	3d	Di
3W	-	FMMTA12	Si-npn-Darl	GP, 40V, 300mA, 350mW, B=50..150, 200MHz	SOT-23	16ta	-	3a	Zx
3WS	-	2SD1979-S	Si-npn	AF, 50V, 500mA, 150mW, 80MHz, B=500..1500	SOT-323	16ta	-	3a	Pan
3WT	-	2SD1979-T	Si-npn	AF, 50V, 500mA, 150mW, 80MHz, B=800..2500	SOT-323	16ta	-	3a	Pan
3Y	-	2SC5190	Si-npn	HF, 9V, 30mA, 150mW, B=40..160, 10GHz	SOT-323	16ta	-	3a	Pan
3Y	-	2SC5363	Si-npn	HF, LN, 9V, 30mA, 125mW, B=40..160, 10GHz	SOT-416	16ta	-	3a	Pan
4	cr	ELM7519NEB	Vdet-IC	1.9V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
4	cs	ELM7519CEB	Vdet-IC	1.9V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
4.3	-	TZT4.3W	Z-diode	4.0..4.50V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3a	Ttr
4.3	-	Z02W4.3V	Z-diode	4.0..4.50V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3f	Kec
4.3G	-	ZD4.3G-AE3	Z-diode	4.3V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
4.3H	-	BZX84C4V3-V	Z-diode	4.13..4.35V, Izt=5mA, Zzt=130Ω, 300mW	SOT-23	16dc	-	3f	Kec
4.3H	-	MAZ3043-H	Z-diode	4..4.6V, If=100mA, Zzt=130Ω, 200mW	SC-59	16dc	-	3a	Pan
4.3L	-	MAZ3043-L	Z-diode	4..4.6V, If=100mA, Zzt=130Ω, 200mW	SC-59	16dc	-	3a	Pan
4.3L	-	ZD4.3L-AE3	Z-diode	4.3V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
4.3M	-	MAZ3043-M	Z-diode	4..4.6V, If=100mA, Zzt=130Ω, 200mW	SC-59	16dc	-	3a	Pan
4.3X	-	TZT4.3XW	Z-diode	4.0..4.23V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3a	Ttr
4.3X	-	Z02W4.3VX	Z-diode	4.0..4.23V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3f	Kec
4.3Y	-	TZT4.3YW	Z-diode	4.13..4.35V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3a	Ttr
4.3Y	-	Z02W4.3VY	Z-diode	4.13..4.35V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3f	Kec
4.3Z	-	TZT4.3ZW	Z-diode	4.25..4.50V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3a	Ttr
4.3Z	-	Z02W4.3VZ	Z-diode	4.25..4.50V, Izt=5mA, Zzt=130Ω, 200mW	SOT-23	16dc	-	3f	Kec
4.7	-	TZT4.7W	Z-diode	4.40..4.90V, Izt=5mA, Zzt=120Ω, 200mW	SOT-23	16dc	-	3a	Ttr
4.7	-	Z02W4.7V	Z-diode	4.40..4.90V, Izt=5mA, Zzt=120Ω, 200mW	SOT-23	16dc	-	3f	Kec
4.7G	-	ZD4.7G-AE3	Z-diode	4.7V±5%, Zzt=100Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
4.7H	-	BZX84C4V7-V	Z-diode	4.53..4.76V, Izt=5mA, Zzt=120Ω, 300mW	SOT-23	16dc	-	3f	Kec
4.7H	-	MAZ3047-H	Z-diode	4.4..5V, If=100mA, Zzt=80Ω, 200mW	SC-59	16dc	-	3a	Pan
4.7L	-	MAZ3047-L	Z-diode	4.4..5V, If=100mA, Zzt=80Ω, 200mW	SC-59	16dc	-	3a	Pan
4.7L	-	ZD4.7L-AE3	Z-diode	4.7V±5%, Zzt=100Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
4.7M	-	MAZ3047-M	Z-diode	4.4..5V, If=100mA, Zzt=80Ω, 200mW	SC-59	16dc	-	3a	Pan
4.7X	-	TZT4.7XW	Z-diode	4.40..4.63V, Izt=5mA, Zzt=120Ω, 200mW	SOT-23	16dc	-	3a	Ttr
4.7X	-	Z02W4.7VX	Z-diode	4.40..4.63V, Izt=5mA, Zzt=120Ω, 200mW	SOT-23	16dc	-	3f	Kec
4.7Y	-	TZT4.7YW	Z-diode	4.53..4.76V, Izt=5mA, Zzt=120Ω, 200mW	SOT-23	16dc	-	3a	Ttr
4.7Y	-	Z02W4.7VY	Z-diode	4.53..4.76V, Izt=5mA, Zzt=120Ω, 200mW	SOT-23	16dc	-	3f	Kec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4.7Z	-	TZT4.7ZW	Z-diode	4.66..4.90V, Izt=5mA, Zzt=120Ω, 200mW	SOT-23	16dc	-	3a	Ttr
4.7Z	-	Z02W4.7VZ	Z-diode	4.66..4.90V, Izt=5mA, Zzt=120Ω, 200mW	SOT-23	16dc	-	3f	Kec
4•3X	-	02CZ4.3-X	Z-diode	4..4.23V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
4•3Y	-	02CZ4.3-Y	Z-diode	4.13..4.35V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
4•3Z	-	02CZ4.3-Z	Z-diode	4.25..4.5V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
4•7X	-	02CZ4.7-X	Z-diode	4.40..4.63V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
4•7Y	-	02CZ4.7-Y	Z-diode	4.53..4.76V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
4•7Z	-	02CZ4.7-Z	Z-diode	4.66..4.9V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
40	-	2SA1037MPT-S	Si-pnp	AF, 60V, 150mA, 200mW, B=270..560, 140MHz	SOT-723	18ta	-	3a	Chm
40	-	AP8822N-10GA	Vdet-IC	1.0V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
40	-	AP8822N-10GT	Vdet-IC	1.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
40	-	AP8822N-10PA	Vdet-IC	1.0V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
40	-	AP8822N-10PT	Vdet-IC	1.0V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
40	-	BC859	Si-pnp	GP, 30V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	Cdi
40	-	ELM9740NBB	Vdet-IC	4.0V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
40	-	ELM9840BB	LVR-IC	4.0V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
40	-	PDTC143TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1=4.7k	SOT-416	16ta	-	3a	Nxp
400AC	-	BL8509-400ACRM	Vdet-IC	4.0V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
400AC	-	LC9009CB3TR400AC	Vdet-IC	4.0V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
400AN	-	BL8509-400ANRM	Vdet-IC	4.0V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
400AN	-	LC9009CB3TR400AN	Vdet-IC	4.0V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
400BC	-	BL8509-400BCRM	Vdet-IC	4.0V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
400BC	-	LC9009CB3TR400BC	Vdet-IC	4.0V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
400BN	-	BL8509-400BNRM	Vdet-IC	4.0V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
400BN	-	LC9009CB3TR400BN	Vdet-IC	4.0V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
400CC	-	BL8509-400CCRM	Vdet-IC	4.0V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
400CC	-	LC9009CB3TR400CC	Vdet-IC	4.0V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
400CN	-	BL8509-400CNRM	Vdet-IC	4.0V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
400CN	-	LC9009CB3TR400CN	Vdet-IC	4.0V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
400DC	-	BL8509-400DCRM	Vdet-IC	4.0V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
400DC	-	LC9009CB3TR400DC	Vdet-IC	4.0V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
400DN	-	BL8509-400DNRM	Vdet-IC	4.0V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
400DN	-	LC9009CB3TR400DN	Vdet-IC	4.0V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
400EC	-	BL8509-400ECRM	Vdet-IC	4.0V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
400EC	-	LC9009CB3TR400EC	Vdet-IC	4.0V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
400EN	-	BL8509-400ENRM	Vdet-IC	4.0V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
400EN	-	LC9009CB3TR400EN	Vdet-IC	4.0V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
400FC	-	BL8509-400FCRM	Vdet-IC	4.0V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
400FC	-	LC9009CB3TR400FC	Vdet-IC	4.0V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
400FN	-	BL8509-400FNRM	Vdet-IC	4.0V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
400FN	-	LC9009CB3TR400FN	Vdet-IC	4.0V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
400GC	-	BL8509-400GCRM	Vdet-IC	4.0V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
400GC	-	LC9009CB3TR400GC	Vdet-IC	4.0V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
400GN	-	BL8509-400GNRM	Vdet-IC	4.0V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
400GN	-	LC9009CB3TR400GN	Vdet-IC	4.0V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
40-2	-	UTC8140-2	Vdet-IC	4.0V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
40-3	-	UTC8140-3	Vdet-IC	4.0V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
40-5	-	UTC8140-5	Vdet-IC	4.0V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
40A	-	AAT60040A-S2	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
40B	-	AAT60040B-S2	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
40B	-	MMBZ5240BPT	Z-diode	9.500..10.50V, Izt=5mA, Zzt=15Ω, 225mW	SOT-23	16dc	-	3a	Chm
40C	-	AAT60040C-S2	Vdet-IC	4.0V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
40D	-	AAT60040D-S2	Vdet-IC	4.0V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
40S	-	MMBZ5240SPT	Z-diode	9.800..10.20V, Izt=5mA, Zzt=15Ω, 225mW	SOT-23	16dc	-	3a	Chm
40S	-	MMCZ5240SPT	Z-diode	9.800..10.20V, Izt=5mA, Zzt=15Ω, 225mW	SOT-346	16dc	-	3a	Chm
40T	-	TK71540AS	LVR-IC	LDO, 4.0V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
41	-	AP8822N-11GA	Vdet-IC	1.1V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
41	-	AP8822N-11GT	Vdet-IC	1.1V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
41	-	AP8822N-11PA	Vdet-IC	1.1V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
41	-	AP8822N-11PT	Vdet-IC	1.1V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
41	-	CHDTC114TMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=10k	SOT-723	18ta	-	3a	Chm
41	-	ELM9741NBB	Vdet-IC	4.1V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
41	-	ELM9841BB	LVR-IC	4.1V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
41	-	PDTC124TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1=22k	SOT-416	16ta	-	3a	Nxp
41	-	PDTC144WK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/22k	SC-59	16ta	-	3a	Nxp
410AC	-	BL8509-410ACRM	Vdet-IC	4.1V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
410AC	-	LC9009CB3TR410AC	Vdet-IC	4.1V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
410AN	-	BL8509-410ANRM	Vdet-IC	4.1V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
410AN	-	LC9009CB3TR410AN	Vdet-IC	4.1V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
410BC	-	BL8509-410BCRM	Vdet-IC	4.1V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
410BC	-	LC9009CB3TR410BC	Vdet-IC	4.1V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
410BN	-	BL8509-410BNRM	Vdet-IC	4.1V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
410BN	-	LC9009CB3TR410BN	Vdet-IC	4.1V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
410CC	-	BL8509-410CCRM	Vdet-IC	4.1V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
410CC	-	LC9009CB3TR410CC	Vdet-IC	4.1V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
410CN	-	BL8509-410CNRM	Vdet-IC	4.1V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
410CN	-	LC9009CB3TR410CN	Vdet-IC	4.1V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
410DC	-	BL8509-410DCRM	Vdet-IC	4.1V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
410DC	-	LC9009CB3TR410DC	Vdet-IC	4.1V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
410DN	-	BL8509-410DNRM	Vdet-IC	4.1V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
410DN	-	LC9009CB3TR410DN	Vdet-IC	4.1V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
410EC	-	BL8509-410ECRM	Vdet-IC	4.1V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
410EC	-	LC9009CB3TR410EC	Vdet-IC	4.1V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
410EN	-	BL8509-410ENRM	Vdet-IC	4.1V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
410EN	-	LC9009CB3TR410EN	Vdet-IC	4.1V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
410FC	-	BL8509-410FCRM	Vdet-IC	4.1V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
410FC	-	LC9009CB3TR410FC	Vdet-IC	4.1V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
410FN	-	BL8509-410FNRM	Vdet-IC	4.1V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
410FN	-	LC9009CB3TR410FN	Vdet-IC	4.1V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
410GC	-	BL8509-410GCRM	Vdet-IC	4.1V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
410GC	-	LC9009CB3TR410GC	Vdet-IC	4.1V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
410GN	-	BL8509-410GNRM	Vdet-IC	4.1V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
410GN	-	LC9009CB3TR410GN	Vdet-IC	4.1V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
41-2	-	UTC8141-2	Vdet-IC	4.1V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
413	-	FMMT413	Si-npn	Avalanche, 150V, 100mA, 330mW, B>50, >150MHz	SOT-23	16ta	-	3a	Zx
41-3	-	UTC8141-3	Vdet-IC	4.1V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
415	-	FMMT415	Si-npn	Avalanche, 260V, 500mA, 330mW, B>25, >40MHz	SOT-23	16ta	-	3a	Zx
41-5	-	UTC8141-5	Vdet-IC	4.1V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
417	-	FMMT417	Si-npn	Avalanche, 320V, 500mA, 330mW, B>25, >40MHz	SOT-23	16ta	-	3a	Zx
41A	-	AAT60041A-S2	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
41A	-	FMMT491A	Si-npn	AF, 80V, 1A, 500mW, B=100..300, >150MHz	SOT-23	16ta	-	3a	Zx
41B	-	AAT60041B-S2	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
41B	-	MMBZ5241BPT	Z-diode	10.45..11.55V, Izt=5mA, Zzt=18Ω, 225mW	SOT-23	16dc	-	3a	Chm
41C	-	AAT60041C-S2	Vdet-IC	4.1V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
41D	-	AAT60041D-S2	Vdet-IC	4.1V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
41S	-	MMBZ5241SPT	Z-diode	10.78..11.22V, Izt=5mA, Zzt=18Ω, 225mW	SOT-23	16dc	-	3a	Chm
41S	-	MMCZ5241SPT	Z-diode	10.78..11.22V, Izt=5mA, Zzt=18Ω, 225mW	SOT-346	16dc	-	3a	Chm
41T	-	TK71541AS	LVR-IC	LDO, 4.1V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
42	-	AP8822N-12GA	Vdet-IC	1.2V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
42	-	AP8822N-12GT	Vdet-IC	1.2V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
42	-	AP8822N-12PA	Vdet-IC	1.2V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
42	-	AP8822N-12PT	Vdet-IC	1.2V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
42	-	BAT54AW	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-323	16df	-	3a	Phi
42	-	CHDTC115TMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=100k	SOT-723	18ta	-	3a	Chm
42	-	ELM9742NBB	Vdet-IC	4.2V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
42	-	ELM9842BB	LVR-IC	4.2V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
42	-	PDTA123EK	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k	SC-59	16ta	-	3a	Nxp
42	-	PDTC144WE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=47k/22k	SOT-416	16ta	-	3a	Nxp
420AC	-	BL8509-420ACRM	Vdet-IC	4.2V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
420AC	-	LC9009CB3TR420AC	Vdet-IC	4.2V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
420AN	-	BL8509-420ANRM	Vdet-IC	4.2V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
420AN	-	LC9009CB3TR420AN	Vdet-IC	4.2V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
420BC	-	BL8509-420BCRM	Vdet-IC	4.2V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
420BC	-	LC9009CB3TR420BC	Vdet-IC	4.2V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
420BN	-	BL8509-420BNRM	Vdet-IC	4.2V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
420BN	-	LC9009CB3TR420BN	Vdet-IC	4.2V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
420CC	-	BL8509-420CCRM	Vdet-IC	4.2V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
420CC	-	LC9009CB3TR420CC	Vdet-IC	4.2V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
420CN	-	BL8509-420CNRM	Vdet-IC	4.2V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
420CN	-	LC9009CB3TR420CN	Vdet-IC	4.2V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
420DC	-	BL8509-420DCRM	Vdet-IC	4.2V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
420DC	-	LC9009CB3TR420DC	Vdet-IC	4.2V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
420DN	-	BL8509-420DNRM	Vdet-IC	4.2V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
420DN	-	LC9009CB3TR420DN	Vdet-IC	4.2V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
420EC	-	BL8509-420ECRM	Vdet-IC	4.2V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
420EC	-	LC9009CB3TR420EC	Vdet-IC	4.2V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
420EN	-	BL8509-420ENRM	Vdet-IC	4.2V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
420EN	-	LC9009CB3TR420EN	Vdet-IC	4.2V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
420FC	-	BL8509-420FCRM	Vdet-IC	4.2V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
420FC	-	LC9009CB3TR420FC	Vdet-IC	4.2V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
420FN	-	BL8509-420FNRM	Vdet-IC	4.2V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
420FN	-	LC9009CB3TR420FN	Vdet-IC	4.2V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
420GC	-	BL8509-420GCRM	Vdet-IC	4.2V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
420GC	-	LC9009CB3TR420GC	Vdet-IC	4.2V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
420GN	-	BL8509-420GNRM	Vdet-IC	4.2V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
420GN	-	LC9009CB3TR420GN	Vdet-IC	4.2V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
42-2	-	UTC8142-2	Vdet-IC	4.2V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
42-3	-	UTC8142-3	Vdet-IC	4.2V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
42-5	-	UTC8142-5	Vdet-IC	4.2V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
42A	-	AAT60042A-S2	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
42B	-	AAT60042B-S2	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
42B	-	MMBZ5242BPT	Z-diode	11.40..12.60V, Izt=5mA, Zzt=22Ω, 225mW	SOT-23	16dc	-	3a	Chm
42C	-	AAT60042C-S2	Vdet-IC	4.2V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
42D	-	AAT60042D-S2	Vdet-IC	4.2V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
42S	-	MMBZ5242SPT	Z-diode	11.76..12.24V, Izt=5mA, Zzt=22Ω, 225mW	SOT-23	16dc	-	3a	Chm
42S	-	MMCZ5242SPT	Z-diode	11.76..12.24V, Izt=5mA, Zzt=22Ω, 225mW	SOT-346	16dc	-	3a	Chm
42T	-	TK71542AS	LVR-IC	LDO, 4.2V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
43	-	1PS89SB15	Si-diode	Dual, SBD, U-Sp, 30V, 200mA, <10pF	SOT-490	18dg	-	3a	Phi
43	-	AP8822N-13GA	Vdet-IC	1.3V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
43	-	AP8822N-13GT	Vdet-IC	1.3V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
43	-	AP8822N-13PA	Vdet-IC	1.3V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
43	-	AP8822N-13PT	Vdet-IC	1.3V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
43	-	BAS40-00-V	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dc	-	3g	Vs
43	-	BAS40T	Si-diode	SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-523	16dc	-	3b	Di
43	-	BAT54CW	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-323	16dg	-	3a	Phi
43	-	CHDTC123TMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=2.2k	SOT-723	18ta	-	3a	Chm
43	-	DTC143XE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/10k	SOT-416	16ta	-	3a	Rhm
43	-	DTC143XKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/10k	SOT-346	16ta	-	3a	Rhm
43	-	DTC143XM	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/10k	VMT3	18ta	-	3a	Rhm
43	-	DTC143XUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/10k	UMT3	16ta	-	3a	Rhm
43	-	ELM9743NBB	Vdet-IC	4.3V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
43	-	ELM9843BB	LVR-IC	4.3V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
43	-	PDTA123JK	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k	SC-59	16ta	-	3a	Nxp
43	-	PDTC144TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1=47k	SOT-416	16ta	-	3a	Nxp
43-	-	BAS40	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dc	-	3a	NxH
430AC	-	BL8509-430ACRM	Vdet-IC	4.3V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
430AC	-	LC9009CB3TR430AC	Vdet-IC	4.3V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
430AN	-	BL8509-430ANRM	Vdet-IC	4.3V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
430AN	-	LC9009CB3TR430AN	Vdet-IC	4.3V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
430BC	-	BL8509-430BCRM	Vdet-IC	4.3V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
430BC	-	LC9009CB3TR430BC	Vdet-IC	4.3V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
430BN	-	BL8509-430BNRM	Vdet-IC	4.3V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
430BN	-	LC9009CB3TR430BN	Vdet-IC	4.3V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
430CC	-	BL8509-430CCRM	Vdet-IC	4.3V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
430CC	-	LC9009CB3TR430CC	Vdet-IC	4.3V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
430CN	-	BL8509-430CNRM	Vdet-IC	4.3V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
430CN	-	LC9009CB3TR430CN	Vdet-IC	4.3V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
430DC	-	BL8509-430DCRM	Vdet-IC	4.3V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
430DC	-	LC9009CB3TR430DC	Vdet-IC	4.3V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
430DN	-	BL8509-430DNRM	Vdet-IC	4.3V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
430DN	-	LC9009CB3TR430DN	Vdet-IC	4.3V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
430EC	-	BL8509-430ECRM	Vdet-IC	4.3V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
430EC	-	LC9009CB3TR430EC	Vdet-IC	4.3V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
430EN	-	BL8509-430ENRM	Vdet-IC	4.3V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
430EN	-	LC9009CB3TR430EN	Vdet-IC	4.3V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
430FC	-	BL8509-430FCRM	Vdet-IC	4.3V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
430FC	-	LC9009CB3TR430FC	Vdet-IC	4.3V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
430FN	-	BL8509-430FNRM	Vdet-IC	4.3V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
430FN	-	LC9009CB3TR430FN	Vdet-IC	4.3V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
430GC	-	BL8509-430GCRM	Vdet-IC	4.3V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
430GC	-	LC9009CB3TR430GC	Vdet-IC	4.3V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
430GN	-	BL8509-430GNRM	Vdet-IC	4.3V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
430GN	-	LC9009CB3TR430GN	Vdet-IC	4.3V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
431	-	HZM4.3NB1	Z-diode	4.01..4.21V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
431	-	PZM4.3NB1	Z-diode	4.3V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
432	-	HZM4.3NB2	Z-diode	4.15..4.34V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
432	-	PZM4.3NB2	Z-diode	4.3V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
43-2	-	UTC8143-2	Vdet-IC	4.3V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
433	-	HZM4.3NB3	Z-diode	4.28..4.48V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
433	-	PZM4.3NB3	Z-diode	4.3V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
43-3	-	UTC8143-3	Vdet-IC	4.3V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
43-5	-	UTC8143-5	Vdet-IC	4.3V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
43A	-	AAT60043A-S2	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
43B	-	AAT60043B-S2	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
43B	-	MMBZ5243BPT	Z-diode	12.35..13.65V, Izt=5mA, Zzt=25Ω, 225mW	SOT-23	16dc	-	3a	Chm
43C	-	AAT60043C-S2	Vdet-IC	4.3V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
43D	-	AAT60043D-S2	Vdet-IC	4.3V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
43h	-	BAS40W	Si-diode	SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-323	16df	-	3b	Wtr
43p	-	BAS40	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dc	-	3a	NxH
43s	-	BAS40	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dc	-	3a	Inf
43S	-	MMBZ5243SPT	Z-diode	12.74..13.26V, Izt=5mA, Zzt=25Ω, 225mW	SOT-23	16dc	-	3a	Chm
43S	-	MMCZ5243SPT	Z-diode	12.74..13.26V, Izt=5mA, Zzt=25Ω, 225mW	SOT-346	16dc	-	3a	Chm
43t	-	BAS40	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dc	-	3a	NxM
43T	-	TK71543AS	LVR-IC	LDO, 4.3V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
43V	-	PZM43NB	Z-diode	43V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
43W	-	BAS40	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dc	-	3a	NxC
43Z	-	02CZ43Z	Z-diode	40.0..45.0V, Izt=2mA, 200mW	SC-59	16dc	-	3a	Tos
43Z	-	CZ1W43	Z-diode	43V±5%, Izt=6mA, 600mW	SOT-23	16dc	-	3a	Cdi
44	-	1PS89SB14	Si-diode	Dual, Schottky barrier, Ultra-Speed, 30V, 200mA, <10pF	SOT-490	18dl	-	3a	Phi
44	-	2SC5008-FB	Si-npn	UHF-L-band, 20V, 35mA, 125mW, 8GHz, B=80..160	SOT-23	16ta	-	3a	Nec
44	-	AP8822N-14GA	Vdet-IC	1.4V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
44	-	AP8822N-14GT	Vdet-IC	1.4V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
44	-	AP8822N-14PA	Vdet-IC	1.4V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
44	-	AP8822N-14PT	Vdet-IC	1.4V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
44	-	BAS40-04-V	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dl	-	3g	Vs
44	-	BAS40T-04	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-523	16dl	-	3b	Di
44	-	BAS40W-04	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-323	16dl	-	3b	Wtr
44	-	BAT54SW	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-323	16dl	-	3a	Phi
44	-	CHDTC124TMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=22k	SOT-723	18ta	-	3a	Chm
44	-	ELM9744NBB	Vdet-IC	4.4V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
44	-	ELM9844BB	LVR-IC	4.4V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
44	-	PDTA124XK	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k	SC-59	16ta	-	3a	Nxp
44-	-	BAS40-04	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dl	-	3a	NxH
440AC	-	BL8509-440ACRM	Vdet-IC	4.4V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
440AC	-	LC9009CB3TR440AC	Vdet-IC	4.4V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
440AN	-	BL8509-440ANRM	Vdet-IC	4.4V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
440AN	-	LC9009CB3TR440AN	Vdet-IC	4.4V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
440BC	-	BL8509-440BCRM	Vdet-IC	4.4V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
440BC	-	LC9009CB3TR440BC	Vdet-IC	4.4V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
440BN	-	BL8509-440BNRM	Vdet-IC	4.4V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
440BN	-	LC9009CB3TR440BN	Vdet-IC	4.4V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
440CC	-	BL8509-440CCRM	Vdet-IC	4.4V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
440CC	-	LC9009CB3TR440CC	Vdet-IC	4.4V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
440CN	-	BL8509-440CNRM	Vdet-IC	4.4V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
440CN	-	LC9009CB3TR440CN	Vdet-IC	4.4V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
440DC	-	BL8509-440DCRM	Vdet-IC	4.4V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
440DC	-	LC9009CB3TR440DC	Vdet-IC	4.4V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
440DN	-	BL8509-440DNRM	Vdet-IC	4.4V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
440DN	-	LC9009CB3TR440DN	Vdet-IC	4.4V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
440EC	-	BL8509-440ECRM	Vdet-IC	4.4V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
440EC	-	LC9009CB3TR440EC	Vdet-IC	4.4V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
440EN	-	BL8509-440ENRM	Vdet-IC	4.4V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
440EN	-	LC9009CB3TR440EN	Vdet-IC	4.4V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
440FC	-	BL8509-440FCRM	Vdet-IC	4.4V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
440FC	-	LC9009CB3TR440FC	Vdet-IC	4.4V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
440FN	-	BL8509-440FNRM	Vdet-IC	4.4V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
440FN	-	LC9009CB3TR440FN	Vdet-IC	4.4V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
440GC	-	BL8509-440GCRM	Vdet-IC	4.4V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
440GC	-	LC9009CB3TR440GC	Vdet-IC	4.4V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
440GN	-	BL8509-440GNRM	Vdet-IC	4.4V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
440GN	-	LC9009CB3TR440GN	Vdet-IC	4.4V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
44-2	-	UTC8144-2	Vdet-IC	4.4V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
44-3	-	UTC8144-3	Vdet-IC	4.4V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
44-5	-	UTC8144-5	Vdet-IC	4.4V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
449	-	FMMT449	Si-npn	Lo-sat, 50V, 1A, 500mW, B=100..300, >150MHz	SOT-23	16ta	-	3a	Zx
44A	-	AAT60044A-S2	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
44B	-	AAT60044B-S2	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
44B	-	MMBZ5244BPT	Z-diode	13.30..14.70V, Izt=5mA, Zzt=25Ω, 225mW	SOT-23	16dc	-	3a	Chm
44C	-	AAT60044C-S2	Vdet-IC	4.4V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
44D	-	AAT60044D-S2	Vdet-IC	4.4V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
44p	-	BAS40-04	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dl	-	3a	NxH
44s	-	BAS40-04	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dl	-	3a	Inf
44S	-	MMBZ5244SPT	Z-diode	13.72..14.28V, Izt=5mA, Zzt=25Ω, 225mW	SOT-23	16dc	-	3a	Chm
44S	-	MMCZ5244SPT	Z-diode	13.72..14.28V, Izt=5mA, Zzt=25Ω, 225mW	SOT-346	16dc	-	3a	Chm
44t	-	BAS40-04	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dl	-	3a	NxM
44T	-	TK71544AS	LVR-IC	LDO, 4.4V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
44W	-	BAS40-04	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dl	-	3a	NxC
45	-	1PS75SB45	Si-diode	Dual, SBD, U-Sp, 40V, 120mA, <5pF	SOT-416	16dg	-	3a	Nxp
45	-	1PS89SB16	Si-diode	Dual, SBD, U-Sp, 30V, 200mA, <10pF	SOT-490	18df	-	3a	Phi
45	-	AP8822N-15GA	Vdet-IC	1.5V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
45	-	AP8822N-15GT	Vdet-IC	1.5V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
45	-	AP8822N-15PA	Vdet-IC	1.5V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
45	-	AP8822N-15PT	Vdet-IC	1.5V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
45	-	BAS40-05-V	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dg	-	3g	Vs
45	-	BAS40-05W	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dg	-	3a	Inf
45	-	BAS40T-05	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-523	16dg	-	3b	Di
45	-	BAS40W-05	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-323	16dg	-	3b	Wtr
45	-	CHDTC143TMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=4.7k	SOT-723	18ta	-	3a	Chm
45	-	DTC124XE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=22k/47k	SOT-416	16ta	-	3a	Rhm
45	-	DTC124XKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	SOT-346	16ta	-	3a	Rhm
45	-	DTC124XM	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=22k/47k	VMT3	18ta	-	3a	Rhm
45	-	DTC124XUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	UMT3	16ta	-	3a	Rhm
45	-	ELM9745NBB	Vdet-IC	4.5V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
45	-	ELM9845BB	LVR-IC	4.5V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
45	-	PDTA143TK	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k	SC-59	16ta	-	3a	Nxp
45-	-	BAS40-05	Si-diode	Dual, SBD, 40V, 200mA, 380mW, Cd<5pF, <5ns	SOT-23	16dg	-	3a	NxH
450AC	-	BL8509-450ACRM	Vdet-IC	4.5V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
450AC	-	LC9009CB3TR450AC	Vdet-IC	4.5V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
450AN	-	BL8509-450ANRM	Vdet-IC	4.5V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
450AN	-	LC9009CB3TR450AN	Vdet-IC	4.5V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
450BC	-	BL8509-450BCRM	Vdet-IC	4.5V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
450BC	-	LC9009CB3TR450BC	Vdet-IC	4.5V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
450BN	-	BL8509-450BNRM	Vdet-IC	4.5V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
450BN	-	LC9009CB3TR450BN	Vdet-IC	4.5V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
450CC	-	BL8509-450CCRM	Vdet-IC	4.5V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
450CC	-	LC9009CB3TR450CC	Vdet-IC	4.5V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
450CN	-	BL8509-450CNRM	Vdet-IC	4.5V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
450CN	-	LC9009CB3TR450CN	Vdet-IC	4.5V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
450DC	-	BL8509-450DCRM	Vdet-IC	4.5V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
450DC	-	LC9009CB3TR450DC	Vdet-IC	4.5V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
450DN	-	BL8509-450DNRM	Vdet-IC	4.5V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
450DN	-	LC9009CB3TR450DN	Vdet-IC	4.5V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
450EC	-	BL8509-450ECRM	Vdet-IC	4.5V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
450EC	-	LC9009CB3TR450EC	Vdet-IC	4.5V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
450EN	-	BL8509-450ENRM	Vdet-IC	4.5V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
450EN	-	LC9009CB3TR450EN	Vdet-IC	4.5V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
450FC	-	BL8509-450FCRM	Vdet-IC	4.5V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
450FC	-	LC9009CB3TR450FC	Vdet-IC	4.5V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
450FN	-	BL8509-450FNRM	Vdet-IC	4.5V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
450FN	-	LC9009CB3TR450FN	Vdet-IC	4.5V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
450GC	-	BL8509-450GCRM	Vdet-IC	4.5V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
450GC	-	LC9009CB3TR450GC	Vdet-IC	4.5V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
450GN	-	BL8509-450GNRM	Vdet-IC	4.5V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
450GN	-	LC9009CB3TR450GN	Vdet-IC	4.5V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
451	-	FMMT451	Si-npn	AF, 80V, 1A, 500mW, B=50..160, >150MHz	SOT-23	16ta	-	3a	Zx
45-2	-	UTC8145-2	Vdet-IC	4.5V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
45-3	-	UTC8145-3	Vdet-IC	4.5V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
455	-	FMMT455	Si-npn	Vid, 160V, 1A, 500mW, B=100..300, >100MHz	SOT-23	16ta	-	3a	Zx
45-5	-	UTC8145-5	Vdet-IC	4.5V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
458	-	FMMT458	Si-npn	Vid, 400V, 225mA, 500mW, B=100..300, >50MHz	SOT-23	16ta	-	3a	Zx
459	-	TMPD459	Si-diode	GP, 200V, 50mA, Vf<1V(50mA), Cd<10pF	SOT-23	16dc	-	3a	All
45A	-	AAT60045A-S2	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
45B	-	AAT60045B-S2	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
45B	-	MMBZ5245BPT	Z-diode	14.25..15.75V, Izt=5mA, Zzt=32Ω, 225mW	SOT-23	16dc	-	3a	Chm
45C	-	AAT60045C-S2	Vdet-IC	4.5V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
45D	-	AAT60045D-S2	Vdet-IC	4.5V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
45p	-	BAS40-05	Si-diode	Dual, SBD, 40V, 200mA, 380mW, Cd<5pF, <5ns	SOT-23	16dg	-	3a	NxH
45s	-	BAS40-05	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dg	-	3a	Inf
45S	-	MMBZ5245SPT	Z-diode	14.70..15.30V, Izt=5mA, Zzt=32Ω, 225mW	SOT-23	16dc	-	3a	Chm
45S	-	MMCZ5245SPT	Z-diode	14.70..15.30V, Izt=5mA, Zzt=32Ω, 225mW	SOT-346	16dc	-	3a	Chm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
45t	-	BAS40-05	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dg	-	3a	NxM
45T	-	TK71545AS	LVR-IC	LDO, 4.5V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
45W	-	BAS40-05	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dg	-	3a	NxC
46	-	AP8822N-16GA	Vdet-IC	1.6V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
46	-	AP8822N-16GT	Vdet-IC	1.6V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
46	-	AP8822N-16PA	Vdet-IC	1.6V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
46	-	AP8822N-16PT	Vdet-IC	1.6V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
46	-	BAS40-06-V	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16df	-	3g	Vs
46	-	BAS40-06W	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dg	-	3a	Inf
46	-	BAS40T-06	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-523	16df	-	3b	Di
46	-	BAS40W-06	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-323	16df	-	3b	Wtr
46	-	CHDTC144TMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=47k	SOT-723	18ta	-	3a	Chm
46	-	ELM9746NBB	Vdet-IC	4.6V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
46	-	ELM9846BB	LVR-IC	4.6V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
46	-	PDTA144WK	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/22k	SC-59	16ta	-	3a	Nxp
46	-	PDTC115EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=100k/100k	SOT-416	16ta	-	3a	Nxp
-46	-	PDTA143XU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	SOT-323	16ta	-	3a	NxH
-46	-	PDTC124XT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k	SOT-23	16ta	-	3a	NxH
46-	-	BAS40-06	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16df	-	3a	NxH
460AC	-	BL8509-460ACRM	Vdet-IC	4.6V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
460AC	-	LC9009CB3TR460AC	Vdet-IC	4.6V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
460AN	-	BL8509-460ANRM	Vdet-IC	4.6V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
460AN	-	LC9009CB3TR460AN	Vdet-IC	4.6V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
460BC	-	BL8509-460BCRM	Vdet-IC	4.6V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
460BC	-	LC9009CB3TR460BC	Vdet-IC	4.6V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
460BN	-	BL8509-460BNRM	Vdet-IC	4.6V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
460BN	-	LC9009CB3TR460BN	Vdet-IC	4.6V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
460CC	-	BL8509-460CCRM	Vdet-IC	4.6V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
460CC	-	LC9009CB3TR460CC	Vdet-IC	4.6V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
460CN	-	BL8509-460CNRM	Vdet-IC	4.6V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
460CN	-	LC9009CB3TR460CN	Vdet-IC	4.6V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
460DC	-	BL8509-460DCRM	Vdet-IC	4.6V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
460DC	-	LC9009CB3TR460DC	Vdet-IC	4.6V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
460DN	-	BL8509-460DNRM	Vdet-IC	4.6V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
460DN	-	LC9009CB3TR460DN	Vdet-IC	4.6V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
460EC	-	BL8509-460ECRM	Vdet-IC	4.6V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
460EC	-	LC9009CB3TR460EC	Vdet-IC	4.6V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
460EN	-	BL8509-460ENRM	Vdet-IC	4.6V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
460EN	-	LC9009CB3TR460EN	Vdet-IC	4.6V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
460FC	-	BL8509-460FCRM	Vdet-IC	4.6V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
460FC	-	LC9009CB3TR460FC	Vdet-IC	4.6V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
460FN	-	BL8509-460FNRM	Vdet-IC	4.6V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
460FN	-	LC9009CB3TR460FN	Vdet-IC	4.6V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
460GC	-	BL8509-460GCRM	Vdet-IC	4.6V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
460GC	-	LC9009CB3TR460GC	Vdet-IC	4.6V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
460GN	-	BL8509-460GNRM	Vdet-IC	4.6V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
460GN	-	LC9009CB3TR460GN	Vdet-IC	4.6V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
46-2	-	UTC8146-2	Vdet-IC	4.6V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
46-3	-	UTC8146-3	Vdet-IC	4.6V±2%, -Reset OCO	SOT-23	16vdb	VD6	3a	Utc
46-5	-	UTC8146-5	Vdet-IC	4.6V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
465AC	-	BL8509-465ACRM	Vdet-IC	4.65V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
465AN	-	BL8509-465ANRM	Vdet-IC	4.65V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
465BC	-	BL8509-465BCRM	Vdet-IC	4.65V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
465BN	-	BL8509-465BNRM	Vdet-IC	4.65V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
465CC	-	BL8509-465CCRM	Vdet-IC	4.65V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
465CN	-	BL8509-465CNRM	Vdet-IC	4.65V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
465DC	-	BL8509-465DCRM	Vdet-IC	4.65V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
465DN	-	BL8509-465DNRM	Vdet-IC	4.65V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
465EC	-	BL8509-465ECRM	Vdet-IC	4.65V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
465EN	-	BL8509-465ENRM	Vdet-IC	4.65V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
465FC	-	BL8509-465FCRM	Vdet-IC	4.65V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
465FN	-	BL8509-465FNRM	Vdet-IC	4.65V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
465GC	-	BL8509-465GCRM	Vdet-IC	4.65V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
465GN	-	BL8509-465GNRM	Vdet-IC	4.65V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
46A	-	AAT60046A-S2	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
46B	-	AAT60046B-S2	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
46B	-	MMBZ5246BPT	Z-diode	15.20..16.80V, Izt=5mA, Zzt=36Ω, 225mW	SOT-23	16dc	-	3a	Chm
46C	-	AAT60046C-S2	Vdet-IC	4.6V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
46D	-	AAT60046D-S2	Vdet-IC	4.6V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
46p	-	BAS40-06	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16df	-	3a	NxH



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
46s	-	BAS40-06	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16df	-	3a	Inf
46S	-	MMBZ5246SPT	Z-diode	15.68..16.32V, Izt=5mA, Zzt=36Ω, 225mW	SOT-23	16dc	-	3a	Chm
46S	-	MMCZ5246SPT	Z-diode	15.68..16.32V, Izt=5mA, Zzt=36Ω, 225mW	SOT-346	16dc	-	3a	Chm
46t	-	BAS40-06	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16df	-	3a	NxM
46T	-	TK71546AS	LVR-IC	LDO, 4.6V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
46W	-	BAS40-06	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16df	-	3a	NxC
47	-	AP8822N-17GA	Vdet-IC	1.7V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
47	-	AP8822N-17GT	Vdet-IC	1.7V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
47	-	AP8822N-17PA	Vdet-IC	1.7V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
47	-	AP8822N-17PT	Vdet-IC	1.7V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
47	-	CHDTC114GMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R2=10k	SOT-723	18ta	-	3a	Chm
47	-	ELM9747NBB	Vdet-IC	4.7V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
47	-	ELM9847BB	LVR-IC	4.7V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
47	-	PDTC114YK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k	SC-59	16ta	-	3a	Nxp
-47	-	PDTA124XT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k	SOT-23	16ta	-	3a	NxH
470	-	HZM4.7NB	Z-diode	4.42..4.9V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
470AC	-	BL8509-470ACRM	Vdet-IC	4.7V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
470AC	-	LC9009CB3TR470AC	Vdet-IC	4.7V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
470AN	-	BL8509-470ANRM	Vdet-IC	4.7V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
470AN	-	LC9009CB3TR470AN	Vdet-IC	4.7V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
470BC	-	BL8509-470BCRM	Vdet-IC	4.7V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
470BC	-	LC9009CB3TR470BC	Vdet-IC	4.7V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
470BN	-	BL8509-470BNRM	Vdet-IC	4.7V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
470BN	-	LC9009CB3TR470BN	Vdet-IC	4.7V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
470CC	-	BL8509-470CCRM	Vdet-IC	4.7V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
470CC	-	LC9009CB3TR470CC	Vdet-IC	4.7V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
470CN	-	BL8509-470CNRM	Vdet-IC	4.7V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
470CN	-	LC9009CB3TR470CN	Vdet-IC	4.7V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
470DC	-	BL8509-470DCRM	Vdet-IC	4.7V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
470DC	-	LC9009CB3TR470DC	Vdet-IC	4.7V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
470DN	-	BL8509-470DNRM	Vdet-IC	4.7V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
470DN	-	LC9009CB3TR470DN	Vdet-IC	4.7V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
470EC	-	BL8509-470ECRM	Vdet-IC	4.7V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
470EC	-	LC9009CB3TR470EC	Vdet-IC	4.7V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
470EN	-	BL8509-470ENRM	Vdet-IC	4.7V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
470EN	-	LC9009CB3TR470EN	Vdet-IC	4.7V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
470FC	-	BL8509-470FCRM	Vdet-IC	4.7V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
470FC	-	LC9009CB3TR470FC	Vdet-IC	4.7V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
470FN	-	BL8509-470FNRM	Vdet-IC	4.7V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
470FN	-	LC9009CB3TR470FN	Vdet-IC	4.7V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
470GC	-	BL8509-470GCRM	Vdet-IC	4.7V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
470GC	-	LC9009CB3TR470GC	Vdet-IC	4.7V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
470GN	-	BL8509-470GNRM	Vdet-IC	4.7V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
470GN	-	LC9009CB3TR470GN	Vdet-IC	4.7V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
471	-	HZM4.7NB1	Z-diode	4.42..4.61V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
471	-	PZM4.7NB1	Z-diode	4.7V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
472	-	HZM4.7NB2	Z-diode	4.55..4.75V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
472	-	PZM4.7NB2	Z-diode	4.7V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
473	-	HZM4.7NB3	Z-diode	4.69..4.9V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
473	-	PZM4.7NB3	Z-diode	4.7V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
47A	-	AAT60047A-S2	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
47B	-	AAT60047B-S2	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
47B	-	MMBZ5247BPT	Z-diode	16.15..17.85V, Izt=5mA, Zzt=36Ω, 225mW	SOT-23	16dc	-	3a	Chm
47C	-	AAT60047C-S2	Vdet-IC	4.7V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
47D	-	AAT60047D-S2	Vdet-IC	4.7V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
47S	-	MMBZ5247SPT	Z-diode	16.66..17.34V, Izt=5mA, Zzt=36Ω, 225mW	SOT-23	16dc	-	3a	Chm
47S	-	MMCZ5247SPT	Z-diode	16.66..17.34V, Izt=5mA, Zzt=36Ω, 225mW	SOT-346	16dc	-	3a	Chm
47T	-	TK71547AS	LVR-IC	LDO, 4.7V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
47V	-	PZM47NB	Z-diode	47V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
47Z	-	02CZ47Z	Z-diode	44.0..49.0V, Izt=2mA, 200mW	SC-59	16dc	-	3a	Tos
47Z	-	CZ1W47	Z-diode	47V±5%, Izt=5.5mA, 600mW	SOT-23	16dc	-	3a	Cdi
48	-	AP8822N-18GA	Vdet-IC	1.8V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
48	-	AP8822N-18GT	Vdet-IC	1.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
48	-	AP8822N-18PA	Vdet-IC	1.8V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
48	-	AP8822N-18PT	Vdet-IC	1.8V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
48	-	CHDTC124GMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R2=22k	SOT-723	18ta	-	3a	Chm
48	-	ELM9748NBB	Vdet-IC	4.8V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
48	-	ELM9848BB	LVR-IC	4.8V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
48	-	PDTC123EK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k	SC-59	16ta	-	3a	Nxp
48	-	PDTC123JK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k	SC-59	16ta	-	3a	Nxp



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
480AC	-	BL8509-480ACRM	Vdet-IC	4.8V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
480AC	-	LC9009CB3TR480AC	Vdet-IC	4.8V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
480AN	-	BL8509-480ANRM	Vdet-IC	4.8V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
480AN	-	LC9009CB3TR480AN	Vdet-IC	4.8V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
480BC	-	BL8509-480BCRM	Vdet-IC	4.8V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
480BC	-	LC9009CB3TR480BC	Vdet-IC	4.8V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
480BN	-	BL8509-480BNRM	Vdet-IC	4.8V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
480BN	-	LC9009CB3TR480BN	Vdet-IC	4.8V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
480CC	-	BL8509-480CCRM	Vdet-IC	4.8V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
480CC	-	LC9009CB3TR480CC	Vdet-IC	4.8V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
480CN	-	BL8509-480CNRM	Vdet-IC	4.8V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
480CN	-	LC9009CB3TR480CN	Vdet-IC	4.8V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
480DC	-	BL8509-480DCRM	Vdet-IC	4.8V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
480DC	-	LC9009CB3TR480DC	Vdet-IC	4.8V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
480DN	-	BL8509-480DNRM	Vdet-IC	4.8V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
480DN	-	LC9009CB3TR480DN	Vdet-IC	4.8V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
480EC	-	BL8509-480ECRM	Vdet-IC	4.8V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
480EC	-	LC9009CB3TR480EC	Vdet-IC	4.8V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
480EN	-	BL8509-480ENRM	Vdet-IC	4.8V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
480EN	-	LC9009CB3TR480EN	Vdet-IC	4.8V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
480FC	-	BL8509-480FCRM	Vdet-IC	4.8V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
480FC	-	LC9009CB3TR480FC	Vdet-IC	4.8V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
480FN	-	BL8509-480FNRM	Vdet-IC	4.8V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
480FN	-	LC9009CB3TR480FN	Vdet-IC	4.8V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
480GC	-	BL8509-480GCRM	Vdet-IC	4.8V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
480GC	-	LC9009CB3TR480GC	Vdet-IC	4.8V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
480GN	-	BL8509-480GNRM	Vdet-IC	4.8V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
480GN	-	LC9009CB3TR480GN	Vdet-IC	4.8V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
489	-	FMMT489	Si-npn	Dr/Out, 50V, 1A, 500mW, B=100..300, >150MHz	SOT-23	16ta	-	3a	Zx
48A	-	AAT60048A-S2	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
48B	-	AAT60048B-S2	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
48B	-	MMBZ5248BPT	Z-diode	17.10..18.90V, Izt=5mA, Zzt=42Ω, 225mW	SOT-23	16dc	-	3a	Chm
48C	-	AAT60048C-S2	Vdet-IC	4.8V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
48D	-	AAT60048D-S2	Vdet-IC	4.8V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
48S	-	MMBZ5248SPT	Z-diode	17.64..18.36V, Izt=5mA, Zzt=42Ω, 225mW	SOT-23	16dc	-	3a	Chm
48S	-	MMCZ5248SPT	Z-diode	17.64..18.36V, Izt=5mA, Zzt=42Ω, 225mW	SOT-346	16dc	-	3a	Chm
48T	-	TK71548AS	LVR-IC	LDO, 4.8V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
49	-	AP8822N-19GA	Vdet-IC	1.9V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
49	-	AP8822N-19GT	Vdet-IC	1.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
49	-	AP8822N-19PA	Vdet-IC	1.9V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
49	-	AP8822N-19PT	Vdet-IC	1.9V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
49	-	CHDTC144GMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R2=47k	SOT-723	18ta	-	3a	Chm
49	-	ELM7619LBB	Vdet-IC	1.9V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
49	-	ELM9749NBB	Vdet-IC	4.9V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
49	-	ELM9849BB	LVR-IC	4.9V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
49	-	PDTC115EEF	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k	SOT-490	18ta	-	3a	Nxp
490AC	-	BL8509-490ACRM	Vdet-IC	4.9V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
490AC	-	LC9009CB3TR490AC	Vdet-IC	4.9V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
490AN	-	BL8509-490ANRM	Vdet-IC	4.9V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
490AN	-	LC9009CB3TR490AN	Vdet-IC	4.9V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
490BC	-	BL8509-490BCRM	Vdet-IC	4.9V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
490BC	-	LC9009CB3TR490BC	Vdet-IC	4.9V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
490BN	-	BL8509-490BNRM	Vdet-IC	4.9V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
490BN	-	LC9009CB3TR490BN	Vdet-IC	4.9V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
490CC	-	BL8509-490CCRM	Vdet-IC	4.9V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
490CC	-	LC9009CB3TR490CC	Vdet-IC	4.9V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
490CN	-	BL8509-490CNRM	Vdet-IC	4.9V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
490CN	-	LC9009CB3TR490CN	Vdet-IC	4.9V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
490DC	-	BL8509-490DCRM	Vdet-IC	4.9V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
490DC	-	LC9009CB3TR490DC	Vdet-IC	4.9V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
490DN	-	BL8509-490DNRM	Vdet-IC	4.9V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
490DN	-	LC9009CB3TR490DN	Vdet-IC	4.9V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
490EC	-	BL8509-490ECRM	Vdet-IC	4.9V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
490EC	-	LC9009CB3TR490EC	Vdet-IC	4.9V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
490EN	-	BL8509-490ENRM	Vdet-IC	4.9V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
490EN	-	LC9009CB3TR490EN	Vdet-IC	4.9V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
490FC	-	BL8509-490FCRM	Vdet-IC	4.9V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
490FC	-	LC9009CB3TR490FC	Vdet-IC	4.9V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
490FN	-	BL8509-490FNRM	Vdet-IC	4.9V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
490FN	-	LC9009CB3TR490FN	Vdet-IC	4.9V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
490GC	-	BL8509-490GCRM	Vdet-IC	4.9V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
490GC	-	LC9009CB3TR490GC	Vdet-IC	4.9V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
490GN	-	BL8509-490GNRM	Vdet-IC	4.9V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
490GN	-	LC9009CB3TR490GN	Vdet-IC	4.9V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
491	-	CMMT491	Si-npn	AF-Drv, 80V, 1A, 700mW, B=100..300, >150MHz	SOT-23	16ta	-	3a	Cdi
491	-	FMMT491	Si-npn	AF, 80V, 1A, 500mW, B=100..300, >150MHz	SOT-23	16ta	-	3a	Zx
493	-	CMMT493	Si-npn	AF-Drv, 120V, 1A, 700mW, B=100..300, >150MHz	SOT-23	16ta	-	3a	Cdi
493	-	FMMT493	Si-npn	AF-Drv, 120/100V, 1A, 500mW, B=100..300, >150MHz	SOT-23	16ta	-	3a	Zx
494	-	FMMT494	Si-npn	Vid, 140V, 1A, 500mW, B=100..300, >100MHz	SOT-23	16ta	-	3a	Zx
495	-	CMMT495	Si-npn	AF-Drv, 170V, 1A, 700mW, B=100..300, >100MHz	SOT-23	16ta	-	3a	Cdi
495	-	FMMT495	Si-npn	Vid, 170V, 1A, 500mW, B=100..300, >100MHz	SOT-23	16ta	-	3a	Zx
497	-	FMMT497	Si-npn	Sw, Vid, 300/300V, 500mA, 500mW, B=80..300, >75MHz	SOT-23	16ta	-	3a	Zx
49A	-	AAT60049A-S2	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
49B	-	AAT60049B-S2	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
49B	-	MMBZ5249BPT	Z-diode	18.05..19.95V, Izt=5mA, Zzt=42Ω, 225mW	SOT-23	16dc	-	3a	Chm
49C	-	AAT60049C-S2	Vdet-IC	4.9V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
49D	-	AAT60049D-S2	Vdet-IC	4.9V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
49S	-	MMBZ5249SPT	Z-diode	18.62..19.38V, Izt=5mA, Zzt=42Ω, 225mW	SOT-23	16dc	-	3a	Chm
49S	-	MMCZ5249SPT	Z-diode	18.62..19.38V, Izt=5mA, Zzt=42Ω, 225mW	SOT-346	16dc	-	3a	Chm
49T	-	TK71549AS	LVR-IC	LDO, 4.9V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
4A	-	BC859A	Si-pnp	GP, 30V, 100mA, 310mW, B=110..220, >150MHz	SOT-23	16ta	-	3a	Cdi
4A	-	FMMV109	C-diode	Tuning, 30V, 26..32pF, Q>250	SOT-23	16dc	-	3a	Zx
4A0	-	TC55RP402ECB	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
4A0	-	XC62FP4002M	LVR-IC	4.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
4A3	-	PZM4.3NB2A	Z-diode	Dual, 4.3V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
4A5	-	TC594002ECB	LVR-IC	LDO, -4.0V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
4A5	-	XC62KN402M	LVR-IC	LDO, -4.0V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
4A7	-	PZM4.7NB2A	Z-diode	Dual, 4.7V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
4AC2	-	81C40-P-AE3-2	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
4AC2G	-	81C40G-P-AE3-2	Vdet-IC	4.0V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
4AC2L	-	81C40L-P-AE3-2	Vdet-IC	4.0V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
4AC3	-	81C40-P-AE3-3	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
4AC3G	-	81C40G-P-AE3-3	Vdet-IC	4.0V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
4AC3L	-	81C40L-P-AE3-3	Vdet-IC	4.0V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
4AC5	-	81C40-P-AE3-5	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
4AC5G	-	81C40G-P-AE3-5	Vdet-IC	4.0V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
4AC5L	-	81C40L-P-AE3-5	Vdet-IC	4.0V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
4AN2	-	81N40-P-AE3-2	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
4AN2G	-	81N40G-P-AE3-2	Vdet-IC	4.0V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
4AN2L	-	81N40L-P-AE3-2	Vdet-IC	4.0V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
4AN3	-	81N40-P-AE3-3	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
4AN3G	-	81N40G-P-AE3-3	Vdet-IC	4.0V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
4AN3L	-	81N40L-P-AE3-3	Vdet-IC	4.0V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
4AN5	-	81N40-P-AE3-5	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
4AN5G	-	81N40G-P-AE3-5	Vdet-IC	4.0V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
4AN5L	-	81N40L-P-AE3-5	Vdet-IC	4.0V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
4Ap	-	BC859A	Si-pnp	GP, 30V, 100mA, 250mW, B=125..250, >100MHz	SOT-23	16ta	-	3a	PhH
4AR	-	BC859AR	Si-pnp	GP, 30V, 100mA, 200mW, B=250, >150MHz	SOT-23	16te	-	3a	Phi
4As	-	BC859A	Si-pnp	GP, 30V, 100mA, 330mW, B=125..250, 250MHz	SOT-23	16ta	-	3a	Sie
4As	-	BC859AW	Si-pnp	GP, 30V, 100mA, 310mW, B=110..220, >150MHz	SOT-23	16ta	-	3a	Sie
4At	-	BC859AW	Si-pnp	GP, 30V, 100mA, 310mW, B=110..220, >150MHz	SOT-23	16ta	-	3a	Phi
4AW	-	BC859A	Si-pnp	GP, 30V, 100mA, 250mW, B=125..250, >100MHz	SOT-23	16ta	-	3a	PhC
4B	-	2SC4238	Si-npn	VHF, 30V, 50mA, 200mW, 1.3GHz, B=100..350	SOT-323	16ta	-	3a	Pan
4B	-	2SC4670	Si-npn	UHF, 30V, 50mA, 150mW, B=100..350, 1.3GHz	SOT-323	16ta	-	3a	Pan
4B	-	BC859B	Si-pnp	GP, 30V, 100mA, 225mW, B=220..475, 300MHz	SOT-323	16ta	-	3a	Ons
4B	-	R3131N24EC	Vdet-IC	2.4V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
4B-	-	BC859BW	Si-pnp	GP, 30V, 100mA, 330mW, B=220..475, >300MHz	SOT-23	16ta	-	3a	Phi
4B0	-	TC55RP412ECB	LVR-IC	LDO, 4.1V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
4B0	-	XC62FP4102M	LVR-IC	4.1V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
4B5	-	TC594102ECB	LVR-IC	LDO, -4.1V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
4B5	-	XC62KN412M	LVR-IC	LDO, -4.1V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
4BC2	-	81C41-P-AE3-2	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
4BC2G	-	81C41G-P-AE3-2	Vdet-IC	4.1V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
4BC2L	-	81C41L-P-AE3-2	Vdet-IC	4.1V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
4BC3	-	81C41-P-AE3-3	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
4BC3G	-	81C41G-P-AE3-3	Vdet-IC	4.1V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
4BC3L	-	81C41L-P-AE3-3	Vdet-IC	4.1V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
4BC5	-	81C41-P-AE3-5	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
4BC5G	-	81C41G-P-AE3-5	Vdet-IC	4.1V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
4BC5L	-	81C41L-P-AE3-5	Vdet-IC	4.1V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4BN2	-	81N41-P-AE3-2	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
4BN2G	-	81N41G-P-AE3-2	Vdet-IC	4.1V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
4BN2L	-	81N41L-P-AE3-2	Vdet-IC	4.1V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
4BN3	-	81N41-P-AE3-3	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
4BN3G	-	81N41G-P-AE3-3	Vdet-IC	4.1V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
4BN3L	-	81N41L-P-AE3-3	Vdet-IC	4.1V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
4BN5	-	81N41-P-AE3-5	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
4BN5G	-	81N41G-P-AE3-5	Vdet-IC	4.1V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
4BN5L	-	81N41L-P-AE3-5	Vdet-IC	4.1V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
4Bp	-	BC859B	Si-pnp	GP, 30V, 100mA, 250mW, B=220..475, >100MHz	SOT-23	16ta	-	3a	PhH
4BR	-	BC859BR	Si-pnp	GP, 30V, 100mA, 200mW, B=475, >150MHz	SOT-23	16te	-	3a	Phi
4Bs	-	BC859B	Si-pnp	GP, 30V, 100mA, 330mW, B=220..475, 250MHz	SOT-23	16ta	-	3a	Sie
4Bs	-	BC859BW	Si-pnp	GP, 30V, 100mA, 330mW, B=220..475, >300MHz	SOT-323	16ta	-	3a	Sie
4Bt	-	BC859B	Si-pnp	GP, 30V, 100mA, 250mW, B=220..475, >150MHz	SOT-23	16ta	-	3a	Phi
4Bt	-	BC859BW	Si-pnp	GP, 30V, 100mA, 330mW, B=220..475, >300MHz	SOT-323	16ta	-	3a	Phi
4BW	-	BC859B	Si-pnp	GP, 30V, 100mA, 250mW, B=220..475, >100MHz	SOT-23	16ta	-	3a	PhC
4C	-	2SC4239	Si-npn	UHF/AF, 15V, 50mA, 2GHz	SOT-323	16ta	-	3a	Pan
4C	-	BC859C	Si-pnp	GP, 30V, 100mA, 330mW, B=420..800, >250MHz	SOT-23	16ta	-	3a	Ons
4C	-	FMMV3102	C-diode	Tuning, 30V, 20..25pF, Q>300	SOT-23	16dc	-	3a	Zx
4C	-	R3131N34EC	Vdet-IC	3.4V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
4C-	-	BC859CW	Si-pnp	GP, 30V, 100mA, 330mW, B=420..800, 250MHz	SOT-23	16ta	-	3a	Phi
4C0	-	TC55RP422ECB	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
4C0	-	XC62FP4202M	LVR-IC	4.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
4C5	-	TC594202ECB	LVR-IC	LDO, -4.2V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
4C5	-	XC62KN422M	LVR-IC	LDO, -4.2V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
4CC2	-	81C42-P-AE3-2	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
4CC2G	-	81C42G-P-AE3-2	Vdet-IC	4.2V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
4CC2L	-	81C42L-P-AE3-2	Vdet-IC	4.2V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
4CC3	-	81C42-P-AE3-3	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
4CC3G	-	81C42G-P-AE3-3	Vdet-IC	4.2V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
4CC3L	-	81C42L-P-AE3-3	Vdet-IC	4.2V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
4CC5	-	81C42-P-AE3-5	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
4CC5G	-	81C42G-P-AE3-5	Vdet-IC	4.2V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
4CC5L	-	81C42L-P-AE3-5	Vdet-IC	4.2V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
4CN2	-	81N42-P-AE3-2	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
4CN2G	-	81N42G-P-AE3-2	Vdet-IC	4.2V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
4CN2L	-	81N42L-P-AE3-2	Vdet-IC	4.2V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
4CN3	-	81N42-P-AE3-3	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
4CN3G	-	81N42G-P-AE3-3	Vdet-IC	4.2V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
4CN3L	-	81N42L-P-AE3-3	Vdet-IC	4.2V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
4CN5	-	81N42-P-AE3-5	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
4CN5G	-	81N42G-P-AE3-5	Vdet-IC	4.2V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
4CN5L	-	81N42L-P-AE3-5	Vdet-IC	4.2V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
4Cp	-	BC859C	Si-pnp	GP, 30V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhH
4CR	-	BC859CR	Si-pnp	GP, 30V, 100mA, 200mW, B=800, >150MHz	SOT-23	16te	-	3a	Phi
4Cs	-	BC859C	Si-pnp	GP, 30V, 100mA, 330mW, B=420..800, 250MHz	SOT-23	16ta	-	3a	Sie
4Cs	-	BC859CW	Si-pnp	GP, 30V, 100mA, 330mW, B=420..800, 250MHz	SOT-323	16ta	-	3a	Sie
4Ct	-	BC859C	Si-pnp	GP, 30V, 100mA, 250mW, B=420..800, 250MHz	SOT-23	16ta	-	3a	Phi
4Ct	-	BC859CW	Si-pnp	GP, 30V, 100mA, 330mW, B=420..800, 250MHz	SOT-323	16ta	-	3a	Phi
4CW	-	BC859C	Si-pnp	GP, 30V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhC
4D	-	2SJ146	p-MOSFET	Sw, 50V, 100mA, 150mW, <150Ω(10mA), <40/60ns	SC-59	16fh	-	3a	Pan
4D	-	HD3A	Si-diode	Fast Sw, 75V, 100mA, Cd<4.0pF, <6ns	SOT-23	16dc	-	3a	Zx
4D	-	R3131N44EC	Vdet-IC	4.4V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
4D-	-	BC859W	Si-pnp	GP, 30V, 100mA, 330mW, B=420..800, 250MHz	SOT-23	16ta	-	3a	Phi
4D0	-	TC55RP432ECB	LVR-IC	LDO, 4.3V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
4D0	-	XC62FP4302M	LVR-IC	4.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
4D5	-	TC594302ECB	LVR-IC	LDO, -4.3V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
4D5	-	XC62KN432M	LVR-IC	LDO, -4.3V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
4DC2	-	81C43-P-AE3-2	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
4DC2G	-	81C43G-P-AE3-2	Vdet-IC	4.3V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
4DC2L	-	81C43L-P-AE3-2	Vdet-IC	4.3V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
4DC3	-	81C43-P-AE3-3	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
4DC3G	-	81C43G-P-AE3-3	Vdet-IC	4.3V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
4DC3L	-	81C43L-P-AE3-3	Vdet-IC	4.3V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
4DC5	-	81C43-P-AE3-5	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
4DC5G	-	81C43G-P-AE3-5	Vdet-IC	4.3V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
4DC5L	-	81C43L-P-AE3-5	Vdet-IC	4.3V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
4DN2	-	81N43-P-AE3-2	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
4DN2G	-	81N43G-P-AE3-2	Vdet-IC	4.3V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
4DN2L	-	81N43L-P-AE3-2	Vdet-IC	4.3V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4DN3	-	81N43-P-AE3-3	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
4DN3G	-	81N43G-P-AE3-3	Vdet-IC	4.3V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
4DN3L	-	81N43L-P-AE3-3	Vdet-IC	4.3V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
4DN5	-	81N43-P-AE3-5	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
4DN5G	-	81N43G-P-AE3-5	Vdet-IC	4.3V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
4DN5L	-	81N43L-P-AE3-5	Vdet-IC	4.3V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
4Dp	-	BC859	Si-pnp	GP, 30V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	PhH
4Dt	-	BC859W	Si-pnp	GP, 30V, 100mA, 330mW, B=420..800, 250MHz	SOT-23	16ta	-	3a	Phi
4DW	-	BC859	Si-pnp	GP, 30V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	PhC
4E	-	BC860A	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-23	16ta	-	3a	Cdi
4E	-	FMMTA92	Si-pnp	Vid, 300/300V, 200mA, 330mW, B>25, >50MHz	SOT-23	16ta	-	3a	Zx
4E0	-	TC55RP442ECB	LVR-IC	LDO, 4.4V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
4E0	-	XC62FP4402M	LVR-IC	4.4V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
4E5	-	TC594402ECB	LVR-IC	LDO, -4.4V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
4E5	-	XC62KN442M	LVR-IC	LDO, -4.4V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
4EC2	-	81C44-P-AE3-2	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
4EC2G	-	81C44G-P-AE3-2	Vdet-IC	4.4V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
4EC2L	-	81C44L-P-AE3-2	Vdet-IC	4.4V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
4EC3	-	81C44-P-AE3-3	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
4EC3G	-	81C44G-P-AE3-3	Vdet-IC	4.4V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
4EC3L	-	81C44L-P-AE3-3	Vdet-IC	4.4V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
4EC5	-	81C44-P-AE3-5	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
4EC5G	-	81C44G-P-AE3-5	Vdet-IC	4.4V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
4EC5L	-	81C44L-P-AE3-5	Vdet-IC	4.4V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
4EN2	-	81N44-P-AE3-2	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
4EN2G	-	81N44G-P-AE3-2	Vdet-IC	4.4V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
4EN2L	-	81N44L-P-AE3-2	Vdet-IC	4.4V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
4EN3	-	81N44-P-AE3-3	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
4EN3G	-	81N44G-P-AE3-3	Vdet-IC	4.4V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
4EN3L	-	81N44L-P-AE3-3	Vdet-IC	4.4V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
4EN5	-	81N44-P-AE3-5	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
4EN5G	-	81N44G-P-AE3-5	Vdet-IC	4.4V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
4EN5L	-	81N44L-P-AE3-5	Vdet-IC	4.4V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
4Ep	-	BC860A	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-23	16ta	-	3a	PhH
4ER	-	BC860AR	Si-pnp	GP, 45V, 100mA, 200mW, B=250, >150MHz	SOT-23	16te	-	3a	Phi
4Et	-	BC860AW	Si-pnp	GP, LN, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3a	Phi
4EW	-	BC860A	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-23	16ta	-	3a	PhC
4EZ	-	FMMV105G	C-diode	Tuning, 30V, 1.8..2.8pF, Q>350	SOT-23	16dc	-	3a	Zx
4F	-	2SC4444	Si-npn	VHF/IF, 45V, 50mA, 500MHz	SOT-23	16ta	-	3a	Pan
4F	-	BC860B	Si-pnp	GP, 50V, 100mA, 330mW, B=220..475, >300MHz	SOT-23	16ta	-	3a	Zx
4F-	-	BC860BW	Si-pnp	GP, LN, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3a	Phi
4F0	-	TC55RP452ECB	LVR-IC	LDO, 4.5V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
4F0	-	XC62FP4502M	LVR-IC	4.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
4F5	-	TC594502ECB	LVR-IC	LDO, -4.5V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
4F5	-	XC62KN452M	LVR-IC	LDO, -4.5V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
4FC2	-	81C45-P-AE3-2	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
4FC2G	-	81C45G-P-AE3-2	Vdet-IC	4.5V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
4FC2L	-	81C45L-P-AE3-2	Vdet-IC	4.5V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
4FC3	-	81C45-P-AE3-3	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
4FC3G	-	81C45G-P-AE3-3	Vdet-IC	4.5V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
4FC3L	-	81C45L-P-AE3-3	Vdet-IC	4.5V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
4FC5	-	81C45-P-AE3-5	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
4FC5G	-	81C45G-P-AE3-5	Vdet-IC	4.5V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
4FC5L	-	81C45L-P-AE3-5	Vdet-IC	4.5V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
4FN2	-	81N45-P-AE3-2	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
4FN2G	-	81N45G-P-AE3-2	Vdet-IC	4.5V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
4FN2L	-	81N45L-P-AE3-2	Vdet-IC	4.5V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
4FN3	-	81N45-P-AE3-3	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
4FN3G	-	81N45G-P-AE3-3	Vdet-IC	4.5V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
4FN3L	-	81N45L-P-AE3-3	Vdet-IC	4.5V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
4FN5	-	81N45-P-AE3-5	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
4FN5G	-	81N45G-P-AE3-5	Vdet-IC	4.5V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
4FN5L	-	81N45L-P-AE3-5	Vdet-IC	4.5V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
4Fp	-	BC860B	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-23	16ta	-	3a	PhH
4FR	-	BC860BR	Si-pnp	GP, 45V, 100mA, 200mW, B=220..475, >150MHz	SOT-23	16te	-	3a	Phi
4Fs	-	BC850BW	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, 250MHz	SOT-323	16ta	-	3c	Inf
4Fs	-	BC860B	Si-pnp	GP, 50V, 100mA, 330mW, B=220..475, 250MHz	SOT-23	16ta	-	3a	Sie
4Fs	-	BC860BW	Si-pnp	GP, LN, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3a	Sie
4Ft	-	BC860B	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-23	16ta	-	3a	PhM
4Ft	-	BC860BW	Si-pnp	GP, LN, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3a	Phi



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4FW	-	BC860B	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-23	16ta	-	3a	PhC
4G	-	BC860C	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	Cdi
4G	-	FMMT2484	Si-npn	AF, LN, 60V, 50mA, 330mW, B=100..500, >100MHz	SOT-23	16ta	-	3a	Zx
4G	-	R3131N24EA	Vdet-IC	2.4V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
4G-	-	BC860CW	Si-pnp	GP, LN, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	Phi
4GC2	-	81C46-P-AE3-2	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
4GC2G	-	81C46G-P-AE3-2	Vdet-IC	4.6V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
4GC2L	-	81C46L-P-AE3-2	Vdet-IC	4.6V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
4GC3	-	81C46-P-AE3-3	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
4GC3G	-	81C46G-P-AE3-3	Vdet-IC	4.6V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
4GC3L	-	81C46L-P-AE3-3	Vdet-IC	4.6V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
4GC5	-	81C46-P-AE3-5	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
4GC5G	-	81C46G-P-AE3-5	Vdet-IC	4.6V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
4GC5L	-	81C46L-P-AE3-5	Vdet-IC	4.6V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
4GN2	-	81N46-P-AE3-2	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
4GN2G	-	81N46G-P-AE3-2	Vdet-IC	4.6V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
4GN2L	-	81N46L-P-AE3-2	Vdet-IC	4.6V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
4GN3	-	81N46-P-AE3-3	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
4GN3G	-	81N46G-P-AE3-3	Vdet-IC	4.6V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
4GN3L	-	81N46L-P-AE3-3	Vdet-IC	4.6V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
4GN5	-	81N46-P-AE3-5	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
4GN5G	-	81N46G-P-AE3-5	Vdet-IC	4.6V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
4GN5L	-	81N46L-P-AE3-5	Vdet-IC	4.6V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
4Gp	-	BC860C	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhH
4GR	-	BC860CR	Si-pnp	GP, 45V, 100mA, 200mW, B=420..800, >150MHz	SOT-23	16te	-	3a	Phi
4Gs	-	BC850CW	Si-npn	GP, 50V, 100mA, 250mW, B=420..800, 250MHz	SOT-323	16ta	-	3c	Inf
4Gs	-	BC860C	Si-pnp	GP, 50V, 100mA, 330mW, B=420..800, >300MHz	SOT-23	16ta	-	3a	Sie
4Gs	-	BC860CW	Si-pnp	GP, LN, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	Sie
4Gt	-	BC860C	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhM
4Gt	-	BC860CW	Si-pnp	GP, LN, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	Phi
4GW	-	BC860C	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	PhC
4GZ	-	BC860C	Si-pnp	GP, 50V, 100mA, 330mW, B=420..800, >300MHz	SOT-23	16ta	-	3a	Zx
4H	-	BC860	Si-pnp	GP, 50V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	Cdi
4H	-	R3131N34EA	Vdet-IC	3.4V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
4H-	-	BC860W	Si-pnp	GP, LN, 50V, 100mA, 250mW, B=125..800, >100MHz	SOT-323	16ta	-	3a	PhM
4H0	-	TC55RP462ECB	LVR-IC	LDO, 4.6V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
4H0	-	XC62FP4602M	LVR-IC	4.6V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
4H5	-	TC594602ECB	LVR-IC	LDO, -4.6V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
4H5	-	XC62KN462M	LVR-IC	LDO, -4.6V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
4HC2	-	81C47-P-AE3-2	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
4HC2G	-	81C47G-P-AE3-2	Vdet-IC	4.7V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
4HC2L	-	81C47L-P-AE3-2	Vdet-IC	4.7V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
4HC3	-	81C47-P-AE3-3	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
4HC3G	-	81C47G-P-AE3-3	Vdet-IC	4.7V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
4HC3L	-	81C47L-P-AE3-3	Vdet-IC	4.7V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
4HC5	-	81C47-P-AE3-5	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
4HC5G	-	81C47G-P-AE3-5	Vdet-IC	4.7V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
4HC5L	-	81C47L-P-AE3-5	Vdet-IC	4.7V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
4HN2	-	81N47-P-AE3-2	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
4HN2G	-	81N47G-P-AE3-2	Vdet-IC	4.7V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
4HN2L	-	81N47L-P-AE3-2	Vdet-IC	4.7V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
4HN3	-	81N47-P-AE3-3	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
4HN3G	-	81N47G-P-AE3-3	Vdet-IC	4.7V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
4HN3L	-	81N47L-P-AE3-3	Vdet-IC	4.7V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
4HN5	-	81N47-P-AE3-5	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
4HN5G	-	81N47G-P-AE3-5	Vdet-IC	4.7V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
4HN5L	-	81N47L-P-AE3-5	Vdet-IC	4.7V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
4Hp	-	BC860	Si-pnp	GP, 50V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	PhH
4Ht	-	BC860W	Si-pnp	GP, LN, 50V, 100mA, 250mW, B=125..800, >100MHz	SOT-323	16ta	-	3a	PhH
4HW	-	BC860	Si-pnp	GP, 50V, 100mA, 250mW, B=125..800, >100MHz	SOT-23	16ta	-	3a	PhC
4HW	-	BC860W	Si-pnp	GP, LN, 50V, 100mA, 250mW, B=125..800, >100MHz	SOT-323	16ta	-	3a	PhC
4J	-	FMMT38A	Si-npn	GP, 80V, 300mA, 330mW, B>500	SOT-23	16ta	-	3a	Zx
4J	-	R3131N44EA	Vdet-IC	4.4V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
4JC2	-	81C48-P-AE3-2	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
4JC2G	-	81C48G-P-AE3-2	Vdet-IC	4.8V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
4JC2L	-	81C48L-P-AE3-2	Vdet-IC	4.8V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
4JC3	-	81C48-P-AE3-3	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
4JC3G	-	81C48G-P-AE3-3	Vdet-IC	4.8V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
4JC3L	-	81C48L-P-AE3-3	Vdet-IC	4.8V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
4JC5	-	81C48-P-AE3-5	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4JC5G	-	81C48G-P-AE3-5	Vdet-IC	4.8V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
4JC5L	-	81C48L-P-AE3-5	Vdet-IC	4.8V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
4JN2	-	81N48-P-AE3-2	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
4JN2G	-	81N48G-P-AE3-2	Vdet-IC	4.8V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
4JN2L	-	81N48L-P-AE3-2	Vdet-IC	4.8V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
4JN3	-	81N48-P-AE3-3	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
4JN3G	-	81N48G-P-AE3-3	Vdet-IC	4.8V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
4JN3L	-	81N48L-P-AE3-3	Vdet-IC	4.8V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
4JN5	-	81N48-P-AE3-5	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
4JN5G	-	81N48G-P-AE3-5	Vdet-IC	4.8V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
4JN5L	-	81N48L-P-AE3-5	Vdet-IC	4.8V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
4K0	-	TC55RP472ECB	LVR-IC	LDO, 4.7V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
4K0	-	XC62FP4702M	LVR-IC	4.7V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
4K5	-	TC594702ECB	LVR-IC	LDO, -4.7V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
4K5	-	XC62KN472M	LVR-IC	LDO, -4.7V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
4KC2	-	81C49-P-AE3-2	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
4KC2G	-	81C49G-P-AE3-2	Vdet-IC	4.9V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
4KC2L	-	81C49L-P-AE3-2	Vdet-IC	4.9V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
4KC3	-	81C49-P-AE3-3	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
4KC3G	-	81C49G-P-AE3-3	Vdet-IC	4.9V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
4KC3L	-	81C49L-P-AE3-3	Vdet-IC	4.9V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
4KC5	-	81C49-P-AE3-5	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
4KC5G	-	81C49G-P-AE3-5	Vdet-IC	4.9V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
4KC5L	-	81C49L-P-AE3-5	Vdet-IC	4.9V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
4KN2	-	81N49-P-AE3-2	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
4KN2G	-	81N49G-P-AE3-2	Vdet-IC	4.9V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
4KN2L	-	81N49L-P-AE3-2	Vdet-IC	4.9V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
4KN3	-	81N49-P-AE3-3	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
4KN3G	-	81N49G-P-AE3-3	Vdet-IC	4.9V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
4KN3L	-	81N49L-P-AE3-3	Vdet-IC	4.9V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
4KN5	-	81N49-P-AE3-5	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
4KN5G	-	81N49G-P-AE3-5	Vdet-IC	4.9V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
4KN5L	-	81N49L-P-AE3-5	Vdet-IC	4.9V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
4Kp	-	BAP64-04	PIN-diode	Dual, RF, 175V, 100mA, 250mW, 0.35pF, 3.8Ω(10mA/100MHz)	SOT-23	16dl	-	3a	Phi
4L	-	R3131N30AC8	Vdet-IC	3V±1.5%, +Reset ODO, 50ms	SOT-23	16vdc	VD6	3b	Ric
4L0	-	TC55RP482ECB	LVR-IC	LDO, 4.8V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
4L0	-	XC62FP4802M	LVR-IC	4.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
4L5	-	TC594802ECB	LVR-IC	LDO, -4.8V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
4L5	-	XC62KN482M	LVR-IC	LDO, -4.8V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
4LO	-	2SK1103-O	n-FET	Sw, 65V, 20mA, 150mW, Idss=0.2..1mA, Up<3.5V	SC-59	16fa	-	3a	Pan
4Lp	-	BAP50-04	PIN-diode	Dual, RF, 50V, 50mA, 500mW, 0.3pF, 3Ω(10mA/100MHz)	SOT-23	16dl	-	3a	PhH
4LP	-	2SK1103-P	n-FET	Sw, 65V, 20mA, 150mW, Idss=0.6..1.5mA, Up<3.5V	SC-59	16fa	-	3a	Pan
4LQ	-	2SK1103-Q	n-FET	Sw, 65V, 20mA, 150mW, Idss=1..3mA, Up<3.5V	SC-59	16fa	-	3a	Pan
4LR	-	2SK1103-R	n-FET	Sw, 65V, 20mA, 150mW, Idss=2.5..6mA, Up<3.5V	SC-59	16fa	-	3a	Pan
4Lt	-	BAP50-04	PIN-diode	Dual, RF, 50V, 50mA, 500mW, 0.3pF, 3Ω(10mA/100MHz)	SOT-23	16dl	-	3a	PhM
4LW	-	BAP50-04	PIN-diode	Dual, RF, 50V, 50mA, 500mW, 0.3pF, 3Ω(10mA/100MHz)	SOT-23	16dl	-	3a	PhC
4M	-	MMBD101	Si-diode	Schottky, UHF-Mix, 7V, 10mA, 225mW, Vf<0.5V(10mA), <1pF	SOT-23	16dc	-	3a	Ons
4M	-	MMBD110	Si-diode	Schottky, UHF/VHF-Det, 7V, 10mA, Vf<0.6V(10mA), <1pF	SOT-323	16dc	-	3a	Mot
4M	-	R3131N30BC8	Vdet-IC	3V±1.5%, +Reset ODO, 100ms	SOT-23	16vdc	VD6	3b	Ric
4M	-	TMPD6916	Si-diode	Schottky, 40V, 500mA, Vf<0.34V(1mA), Cd<5pF	SOT-23	16dc	-	3a	All
4M0	-	TC55RP492ECB	LVR-IC	LDO, 4.9V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
4M0	-	XC62FP4902M	LVR-IC	4.9V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
4M2	-	LM4040A41IDB	Vref-IC	µPower, Precision, Shunt, 4.096V±0.1%	SOT-23	16dk	RF1	3d	Ti
4M3	-	LM4040B41IDB	Vref-IC	µPower, Precision, Shunt, 4.096V±0.2%	SOT-23	16dk	RF1	3d	Ti
4M4	-	LM4040C41IDB	Vref-IC	µPower, Precision, Shunt, 4.096V±0.5%	SOT-23	16dk	RF1	3d	Ti
4M5	-	LM4040D41IDB	Vref-IC	µPower, Precision, Shunt, 4.096V±1%	SOT-23	16dk	RF1	3d	Ti
4M5	-	TC594902ECB	LVR-IC	LDO, -4.9V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
4M5	-	XC62KN492M	LVR-IC	LDO, -4.9V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
4M6	-	LM4040A30IDB	Vref-IC	µPower, Precision, Shunt, 3.00V±0.1%	SOT-23	16dk	RF1	3d	Ti
4M7	-	LM4040B30IDB	Vref-IC	µPower, Precision, Shunt, 3.00V±0.2%	SOT-23	16dk	RF1	3d	Ti
4M8	-	LM4040D25QDB	Vref-IC	µPower, Precision, Shunt, 2.50V±1%	SOT-23	16dk	RF1	3d	Ti
4M9	-	LM4040D30IDB	Vref-IC	µPower, Precision, Shunt, 3.00V±1%	SOT-23	16dk	RF1	3d	Ti
4MA	-	LM4040C25QDB	Vref-IC	µPower, Precision, Shunt, 2.50V±0.5%	SOT-23	16dk	RF1	3d	Ti
4MB	-	LM4040C30IDB	Vref-IC	µPower, Precision, Shunt, 3.00V±0.5%	SOT-23	16dk	RF1	3d	Ti
4MC	-	LM4040A20IDB	Vref-IC	µPower, Precision, Shunt, 2.048V±0.1%	SOT-23	16dk	RF1	3d	Ti
4MD	-	LM4040B20IDB	Vref-IC	µPower, Precision, Shunt, 2.048V±0.2%	SOT-23	16dk	RF1	3d	Ti
4ME	-	LM4040D25IDB	Vref-IC	µPower, Precision, Shunt, 2.50V±1%	SOT-23	16dk	RF1	3d	Ti
4MO	-	2SJ163-O	p-FET	Sw, 65V, 20mA, 150mW, Idss=0.2..1mA	SC-59	16fa	-	3a	Pan
4MO	-	2SJ364-O	p-FET	Sw, 65V, 20mA, 150mW, Idss=0.2..1mA	SOT-323	16fa	-	3a	Pan
4MP	-	2SJ163-P	p-FET	Sw, 65V, 20mA, 150mW, Idss=0.6..1.5mA	SC-59	16fa	-	3a	Pan

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4MP	-	2SJ364-P	p-FET	Sw, 65V, 20mA, 150mW, Idss=0.6..1.5mA, 2.5ms	SOT-323	16fa	-	3a	Pan
4MQ	-	2SJ163-Q	p-FET	Sw, 65V, 20mA, 150mW, Idss=1..3mA	SC-59	16fa	-	3a	Pan
4MQ	-	2SJ364-Q	p-FET	Sw, 65V, 20mA, 150mW, Idss=1..3mA, 2.5ms	SOT-323	16fa	-	3a	Pan
4MQ	-	LM4040C20IDB	Vref-IC	µPower, Precision, Shunt, 2.048V±0.5%	SOT-23	16dk	RF1	3d	Ti
4MR	-	2SJ163-R	p-FET	Sw, 65V, 20mA, 150mW, Idss=2.5..6mA	SC-59	16fa	-	3a	Pan
4MR	-	2SJ364-R	p-FET	Sw, 65V, 20mA, 150mW, Idss=2.5..6mA, 2.5ms	SOT-323	16fa	-	3a	Pan
4MV	-	LM4040D20IDB	Vref-IC	µPower, Precision, Shunt, 2.048V±1%	SOT-23	16dk	RF1	3d	Ti
4MW	-	LM4040C20QDB	Vref-IC	µPower, Precision, Shunt, 2.048V±0.5%	SOT-23	16dk	RF1	3d	Ti
4MY	-	LM4040D20QDB	Vref-IC	µPower, Precision, Shunt, 2.048V±1%	SOT-23	16dk	RF1	3d	Ti
4N	-	R3131N30DC8	Vdet-IC	3V±1.5%, +Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Ric
4NA	-	LM4040A50IDB	Vref-IC	µPower, Precision, Shunt, 5.00V±0.1%	SOT-23	16dk	RF1	3d	Ti
4NB	-	LM4040B50IDB	Vref-IC	µPower, Precision, Shunt, 5.00V±0.2%	SOT-23	16dk	RF1	3d	Ti
4NC	-	LM4040C50IDB	Vref-IC	µPower, Precision, Shunt, 5.00V±0.5%	SOT-23	16dk	RF1	3d	Ti
4ND	-	LM4040D50IDB	Vref-IC	µPower, Precision, Shunt, 5.00V±1%	SOT-23	16dk	RF1	3d	Ti
4NE	-	LM4040C50QDB	Vref-IC	µPower, Precision, Shunt, 5.00V±0.5%	SOT-23	16dk	RF1	3d	Ti
4NF	-	LM4040D50QDB	Vref-IC	µPower, Precision, Shunt, 5.00V±1%	SOT-23	16dk	RF1	3d	Ti
4NG	-	LM4040A25IDB	Vref-IC	µPower, Precision, Shunt, 2.50V±0.1%	SOT-23	16dk	RF1	3d	Ti
4NH	-	LM4040B25IDB	Vref-IC	µPower, Precision, Shunt, 2.50V±0.2%	SOT-23	16dk	RF1	3d	Ti
4NJ	-	LM4040C30QDB	Vref-IC	µPower, Precision, Shunt, 3.00V±0.5%	SOT-23	16dk	RF1	3d	Ti
4NK	-	LM4040D30QDB	Vref-IC	µPower, Precision, Shunt, 3.00V±1%	SOT-23	16dk	RF1	3d	Ti
4NL	-	LM4040A82IDB	Vref-IC	µPower, Precision, Shunt, 8.192V±0.1%	SOT-23	16dk	RF1	3d	Ti
4NM	-	LM4040B82IDB	Vref-IC	µPower, Precision, Shunt, 8.192V±0.2%	SOT-23	16dk	RF1	3d	Ti
4NN	-	LM4040C82IDB	Vref-IC	µPower, Precision, Shunt, 8.192V±0.5%	SOT-23	16dk	RF1	3d	Ti
4NP	-	LM4040D82IDB	Vref-IC	µPower, Precision, Shunt, 8.192V±1%	SOT-23	16dk	RF1	3d	Ti
4NQ	-	LM4040A10IDB	Vref-IC	µPower, Precision, Shunt, 10.0V±0.1%	SOT-23	16dk	RF1	3d	Ti
4NR	-	LM4040B10IDB	Vref-IC	µPower, Precision, Shunt, 10.0V±0.2%	SOT-23	16dk	RF1	3d	Ti
4NS	-	LM4040C10IDB	Vref-IC	µPower, Precision, Shunt, 10.0V±0.5%	SOT-23	16dk	RF1	3d	Ti
4NT	-	LM4040D10IDB	Vref-IC	µPower, Precision, Shunt, 10.0V±1%	SOT-23	16dk	RF1	3d	Ti
4NU	-	LM4040C25IDB	Vref-IC	µPower, Precision, Shunt, 2.50V±0.5%	SOT-23	16dk	RF1	3d	Ti
4O	-	2SA1721-O	Si-pnp	Nix, Vid, 300V, 100mA, B=70..140, 55MHz	SOT-23	16ta	-	3a	Tos
4P	-	FMMT2907R	Si-pnp	GP, 40V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16te	-	3a	Zx
4P	-	R3131N30HC8	Vdet-IC	3V±1.5%, +Reset ODO, 400ms	SOT-23	16vdc	VD6	3b	Ric
4Q	-	R3131N30AA8	Vdet-IC	3V±1.5%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3b	Ric
4R	-	2SA1721-R	Si-pnp	Nix, Vid, 300V, 100mA, B=100..200, 55MHz	SOT-23	16ta	-	3a	Tos
4R	-	R3131N30BA8	Vdet-IC	3V±1.5%, +Reset PPO, 100ms	SOT-23	16vdc	VD7	3b	Ric
4R	-	SRA2204E	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=47k/47k	SOT-523	16ta	-	3a	Auk
4R	-	SRA2204EF	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=47k/47k	SOT-523F	18ta	-	3a	Auk
4R	-	SRA2204U	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/47k	SOT-323	16ta	-	3a	Auk
4R	-	SRA2204UF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/47k	SOT-323F	18ta	-	3a	Auk
4S	-	R3131N30DA8	Vdet-IC	3V±1.5%, +Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Ric
4T	-	2SK1216	n-FET	Video-Camera, 10V, 50mA, Idss>9.2mA	SOT-23	16fa	-	3a	Pan
4T	-	MMBD301	Si-diode	Schottky, UHF/VHF-Det, 30V, 200mW, <1.5pF	SOT-23	16dc	-	3a	Ons
4T	-	MMBD330	Si-diode	Schottky, UHF/VHF-Det, 70V, 10mA, Vf<0.6V(10mA), <1pF	SOT-323	16dc	-	3a	Ons
4T	-	R3131N30HA8	Vdet-IC	3V±1.5%, +Reset PPO, 400ms	SOT-23	16vdc	VD7	3b	Ric
4U	-	2SC6036	Si-npn	AF-Amp, 15V, 500mA, 100mW, 200MHz, B=270..680	SSSMini3-F1	18ta	-	3a	Pan
4U	-	2SC6037J	Si-npn	AF-Amp, 15V, 500mA, 125mW, 200MHz, B=270..680	SSMini3-F1	18ta	-	3a	Pan
4V	-	2SK1228	n-MOSFET	Sw, 50V, ±50mA, <50Ω(10mA)	SOT-23	16fh	-	3a	Pan
4V	-	2SK1374	n-MOSFET	Sw, 50V, 50mA, 150mW, 27Ω(10mA), 0.2/0.2µs	SOT-323	16fh	-	3a	Pan
4V	-	BCW65AR	Si-npn	AF, 60V, 800mA, 330mW, B=100..250, >100MHz	SOT-23	16te	-	3a	Zx
4V3	-	CHPZ4V3PT	Z-diode	Dual, 4.0..4.6V, Izt=5mA, Zzt=90Ω, 350mW	SOT-23	16df	-	3a	Chm
4V3	-	PZM4.3NB	Z-diode	4.3V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
4V7	-	CHPZ4V7PT	Z-diode	Dual, 4.4..5.0V, Izt=5mA, Zzt=80Ω, 350mW	SOT-23	16df	-	3a	Chm
4V7	-	PZM4.7NB	Z-diode	4.7V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
4W	-	BCW67AR	Si-pnp	AF, Sw, 45V, 800mA, 330mW, B=100..250, >100MHz	SOT-23	16ta	-	3a	Zx
4W-	-	BAP64-04W	PIN-diode	Dual, RF, 100V, 100mA, 250mW, 0.35pF, 3.8Ω(10mA/100MHz)	SOT-323	16dl	-	3a	Phi
4Z7	-	CZ1W4V7	Z-diode	4.7V±5%, Izt=53mA, 600mW	SOT-23	16dc	-	3a	Cdi
5	cr	ELM7542NEB	Vdet-IC	4.2V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
5	cs	ELM7542CEB	Vdet-IC	4.2V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
5.1	-	TZT5.1W	Z-diode	4.80..5.40V, Izt=5mA, Zzt=70Ω, 200mW	SOT-23	16dc	-	3a	Ttr
5.1	-	Z02W5.1V	Z-diode	4.80..5.40V, Izt=5mA, Zzt=70Ω, 200mW	SOT-23	16dc	-	3f	Kec
5.1G	-	ZD5.1G-AE3	Z-diode	5.1V±5%, Zzt=80Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
5.1H	-	BZX84C5V1-V	Z-diode	4.97..5.24V, Izt=5mA, Zzt=70Ω, 300mW	SOT-23	16dc	-	3f	Kec
5.1H	-	MAZ3051-H	Z-diode	4.8..5.4V, If=100mA, Zzt=60Ω, 200mW	SC-59	16dc	-	3a	Pan
5.1L	-	MAZ3051-L	Z-diode	4.8..5.4V, If=100mA, Zzt=60Ω, 200mW	SC-59	16dc	-	3a	Pan
5.1L	-	ZD5.1L-AE3	Z-diode	5.1V±5%, Zzt=80Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
5.1M	-	MAZ3051-M	Z-diode	4.8..5.4V, If=100mA, Zzt=60Ω, 200mW	SC-59	16dc	-	3a	Pan
5.1X	-	TZT5.1XW	Z-diode	4.80..5.07V, Izt=5mA, Zzt=70Ω, 200mW	SOT-23	16dc	-	3a	Ttr
5.1X	-	TZT5.1ZW	Z-diode	5.14..5.40V, Izt=5mA, Zzt=70Ω, 200mW	SOT-23	16dc	-	3a	Ttr
5.1X	-	Z02W5.1VX	Z-diode	4.80..5.07V, Izt=5mA, Zzt=70Ω, 200mW	SOT-23	16dc	-	3f	Kec
5.1Y	-	TZT5.1YW	Z-diode	4.97..5.24V, Izt=5mA, Zzt=70Ω, 200mW	SOT-23	16dc	-	3a	Ttr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5.1Y	-	Z02W5.1VY	Z-diode	4.97..5.24V, Izt=5mA, Zzt=70Ω, 200mW	SOT-23	16dc	-	3f	Kec
5.1Z	-	Z02W5.1VZ	Z-diode	5.14..5.40V, Izt=5mA, Zzt=70Ω, 200mW	SOT-23	16dc	-	3f	Kec
5.6	-	TZT5.6W	Z-diode	5.30..6.0V, Izt=5mA, Zzt=40Ω, 200mW	SOT-23	16dc	-	3a	Ttr
5.6	-	Z02W5.6V	Z-diode	5.30..6.0V, Izt=5mA, Zzt=40Ω, 200mW	SOT-23	16dc	-	3f	Kec
5.6G	-	ZD5.6G-AE3	Z-diode	5.6V±5%, Zzt=60Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
5.6H	-	BZX84C5V6-V	Z-diode	5.43..5.81V, Izt=5mA, Zzt=40Ω, 300mW	SOT-23	16dc	-	3f	Kec
5.6H	-	MAZ3056-H	Z-diode	5.3..6V, If=100mA, Zzt=40Ω, 200mW	SC-59	16dc	-	3a	Pan
5.6L	-	MAZ3056-L	Z-diode	5.3..6V, If=100mA, Zzt=40Ω, 200mW	SC-59	16dc	-	3a	Pan
5.6L	-	ZD5.6L-AE3	Z-diode	5.6V±5%, Zzt=60Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
5.6M	-	MAZ3056-M	Z-diode	5.3..6V, If=100mA, Zzt=40Ω, 200mW	SC-59	16dc	-	3a	Pan
5.6X	-	TZT5.6XW	Z-diode	5.30..5.63V, Izt=5mA, Zzt=40Ω, 200mW	SOT-23	16dc	-	3a	Ttr
5.6X	-	Z02W5.6VX	Z-diode	5.30..5.63V, Izt=5mA, Zzt=40Ω, 200mW	SOT-23	16dc	-	3f	Kec
5.6Y	-	TZT5.6YW	Z-diode	5.43..5.81V, Izt=5mA, Zzt=40Ω, 200mW	SOT-23	16dc	-	3a	Ttr
5.6Y	-	Z02W5.6VY	Z-diode	5.43..5.81V, Izt=5mA, Zzt=40Ω, 200mW	SOT-23	16dc	-	3f	Kec
5.6Z	-	MAZT056H	SAZ-diode	Dual, 5.6V, 5mA, 150mW	SC-89	18df	-	3a	Pan
5.6Z	-	TZT5.6ZW	Z-diode	5.61..6.0V, Izt=5mA, Zzt=40Ω, 200mW	SOT-23	16dc	-	3a	Ttr
5.6Z	-	Z02W5.6VZ	Z-diode	5.61..6.0V, Izt=5mA, Zzt=40Ω, 200mW	SOT-23	16dc	-	3f	Kec
5•1X	-	02CZ5.1-X	Z-diode	4.8..5.07V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
5•1Y	-	02CZ5.1-Y	Z-diode	4.97..5.24V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
5•1Z	-	02CZ5.1-Z	Z-diode	5.14..5.4V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
5•6X	-	02CZ5.6-X	Z-diode	5.3..5.63V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
5•6Y	-	02CZ5.6-Y	Z-diode	5.43..5.81V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
5•6Z	-	02CZ5.6-Z	Z-diode	5.61..6V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
50	-	AP8822N-20GA	Vdet-IC	2.0V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
50	-	AP8822N-20GT	Vdet-IC	2.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
50	-	AP8822N-20PA	Vdet-IC	2.0V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
50	-	AP8822N-20PT	Vdet-IC	2.0V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
50	-	BAS116T	Si-diode	Sw, 85V, 215mA, 225mW, Vf<1.25V(150mA), >3µs, 2pF	SOT-523	16dc	-	3b	Di
50	-	CHDTC114EMPT	Si-npn-Digi	Sw, 50V, 50mA, 250MHz, R1/R2=10k/10k	SOT-723	18ta	-	3a	Chm
50	-	ELM9750NBB	Vdet-IC	5.0V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
50	-	ELM9850BB	LVR-IC	5.0V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
50	-	PDTA143EEF	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k	SOT-490	18ta	-	3a	Nxp
50	-	PDTC124TK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=22k	SC-59	16ta	-	3a	Nxp
500AC	-	BL8509-500ACRM	Vdet-IC	5.0V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
500AC	-	LC9009CB3TR500AC	Vdet-IC	5.0V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
500AN	-	BL8509-500ANRM	Vdet-IC	5.0V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
500AN	-	LC9009CB3TR500AN	Vdet-IC	5.0V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
500BC	-	BL8509-500BCRM	Vdet-IC	5.0V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
500BC	-	LC9009CB3TR500BC	Vdet-IC	5.0V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
500BN	-	BL8509-500BNRM	Vdet-IC	5.0V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
500BN	-	LC9009CB3TR500BN	Vdet-IC	5.0V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
500CC	-	BL8509-500CCRM	Vdet-IC	5.0V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
500CC	-	LC9009CB3TR500CC	Vdet-IC	5.0V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
500CN	-	BL8509-500CNRM	Vdet-IC	5.0V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
500CN	-	LC9009CB3TR500CN	Vdet-IC	5.0V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
500DC	-	BL8509-500DCRM	Vdet-IC	5.0V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
500DC	-	LC9009CB3TR500DC	Vdet-IC	5.0V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
500DN	-	BL8509-500DNRM	Vdet-IC	5.0V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
500DN	-	LC9009CB3TR500DN	Vdet-IC	5.0V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
500EC	-	BL8509-500ECRM	Vdet-IC	5.0V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
500EC	-	LC9009CB3TR500EC	Vdet-IC	5.0V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
500EN	-	BL8509-500ENRM	Vdet-IC	5.0V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
500EN	-	LC9009CB3TR500EN	Vdet-IC	5.0V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
500FC	-	BL8509-500FCRM	Vdet-IC	5.0V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
500FC	-	LC9009CB3TR500FC	Vdet-IC	5.0V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
500FN	-	BL8509-500FNRM	Vdet-IC	5.0V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
500FN	-	LC9009CB3TR500FN	Vdet-IC	5.0V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
500GC	-	BL8509-500GCRM	Vdet-IC	5.0V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
500GC	-	LC9009CB3TR500GC	Vdet-IC	5.0V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
500GN	-	BL8509-500GNRM	Vdet-IC	5.0V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
500GN	-	LC9009CB3TR500GN	Vdet-IC	5.0V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
50-2	-	UTC8150-2	Vdet-IC	5.0V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
50-3	-	UTC8150-3	Vdet-IC	5.0V±2%, -Reset OCO	SOT-23	16vdy	VD6	3a	Utc
50-5	-	UTC8150-5	Vdet-IC	5.0V±2%, -Reset OCO	SOT-23	16vdc	VD6	3a	Utc
50A	-	AAT60050A-S2	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
50B	-	AAT60050B-S2	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
50B	-	MMBZ5250BPT	Z-diode	19.0..21.0V, Izt=5mA, Zzt=48Ω, 225mW	SOT-23	16dc	-	3a	Chm
50C	-	AAT60050C-S2	Vdet-IC	5.0V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
50D	-	AAT60050D-S2	Vdet-IC	5.0V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
50S	-	MMBZ5250SPT	Z-diode	19.60..20.40V, Izt=5mA, Zzt=48Ω, 225mW	SOT-23	16dc	-	3a	Chm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
50S	-	MMCZ5250SPT	Z-diode	19.60..20.40V, Izt=5mA, Zzt=48Ω, 225mW	SOT-346	16dc	-	3a	Chm
50T	-	TK71550AS	LVR-IC	LDO, 5.0V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
51	-	AP8822N-21GA	Vdet-IC	2.1V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
51	-	AP8822N-21GT	Vdet-IC	2.1V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
51	-	AP8822N-21PA	Vdet-IC	2.1V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
51	-	AP8822N-21PT	Vdet-IC	2.1V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
51	-	BAV170T	Si-diode	Dual, Sw, 85V, 125mA, 225mW, Vf<1.25V(150mA), >3µs, 2pF	SOT-523	16dg	-	3b	Di
51	-	CHDTC114YMPT	Si-npn-Digi	Sw, 50V, 70mA, 250MHz, R1/R2=10/47k	SOT-723	18ta	-	3a	Chm
51	-	ELM9751NBB	Vdet-IC	5.1V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
51	-	ELM9851BB	LVR-IC	5.1V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
51	-	PDTC124XK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k	SC-59	16ta	-	3a	Nxp
51	-	PDTC143EEF	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k	SOT-490	18ta	-	3a	Nxp
-51	-	PDTC124XU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	SOT-490	16ta	-	3a	NxH
510	-	HZM5.1NB	Z-diode	4.84..5.37V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
510AC	-	BL8509-510ACRM	Vdet-IC	5.1V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
510AC	-	LC9009CB3TR510AC	Vdet-IC	5.1V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
510AN	-	BL8509-510ANRM	Vdet-IC	5.1V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
510AN	-	LC9009CB3TR510AN	Vdet-IC	5.1V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
510BC	-	BL8509-510BCRM	Vdet-IC	5.1V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
510BC	-	LC9009CB3TR510BC	Vdet-IC	5.1V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
510BN	-	BL8509-510BNRM	Vdet-IC	5.1V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
510BN	-	LC9009CB3TR510BN	Vdet-IC	5.1V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
510CC	-	BL8509-510CCRM	Vdet-IC	5.1V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
510CC	-	LC9009CB3TR510CC	Vdet-IC	5.1V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
510CN	-	BL8509-510CNRM	Vdet-IC	5.1V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
510CN	-	LC9009CB3TR510CN	Vdet-IC	5.1V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
510DC	-	BL8509-510DCRM	Vdet-IC	5.1V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
510DC	-	LC9009CB3TR510DC	Vdet-IC	5.1V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
510DN	-	BL8509-510DNRM	Vdet-IC	5.1V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
510DN	-	LC9009CB3TR510DN	Vdet-IC	5.1V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
510EC	-	BL8509-510ECRM	Vdet-IC	5.1V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
510EC	-	LC9009CB3TR510EC	Vdet-IC	5.1V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
510EN	-	BL8509-510ENRM	Vdet-IC	5.1V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
510EN	-	LC9009CB3TR510EN	Vdet-IC	5.1V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
510FC	-	BL8509-510FCRM	Vdet-IC	5.1V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
510FC	-	LC9009CB3TR510FC	Vdet-IC	5.1V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
510FN	-	BL8509-510FNRM	Vdet-IC	5.1V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
510FN	-	LC9009CB3TR510FN	Vdet-IC	5.1V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
510GC	-	BL8509-510GCRM	Vdet-IC	5.1V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
510GC	-	LC9009CB3TR510GC	Vdet-IC	5.1V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
510GN	-	BL8509-510GNRM	Vdet-IC	5.1V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
510GN	-	LC9009CB3TR510GN	Vdet-IC	5.1V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
511	-	HZM5.1NB1	Z-diode	4.84..5.04V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
511	-	PZM5.1NB1	Z-diode	5.1V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
512	-	HZM5.1NB2	Z-diode	4.98..5.2V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
512	-	PZM5.1NB2	Z-diode	5.1V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
513	-	HZM5.1NB3	Z-diode	5.14..5.37V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
513	-	PZM5.1NB3	Z-diode	5.1V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
515	cm	XC9111A151MR	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
516	cm	XC9111A161MR	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
517	-	FMMT6517	Si-npn	Vid, 350/350V, 500mA, 330mW, B=30..200, >50MHz	SOT-23	16ta	-	3a	Zx
517	cm	XC9111A171MR	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
518	cm	XC9111A181MR	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
519	cm	XC9111A191MR	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
51A	-	AAT60051A-S2	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
51B	-	AAT60051B-S2	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
51B	-	MMBZ5251BPT	Z-diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 225mW	SOT-23	16dc	-	3a	Chm
51C	-	AAT60051C-S2	Vdet-IC	5.1V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
51D	-	AAT60051D-S2	Vdet-IC	5.1V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
51S	-	MMBZ5251SPT	Z-diode	21.56..22.44V, Izt=5mA, Zzt=55Ω, 225mW	SOT-23	16dc	-	3a	Chm
51S	-	MMCZ5251SPT	Z-diode	21.56..22.44V, Izt=5mA, Zzt=55Ω, 225mW	SOT-346	16dc	-	3a	Chm
51V	-	PZM51NB	Z-diode	51V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
52	-	AP8822N-22GA	Vdet-IC	2.2V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
52	-	AP8822N-22GT	Vdet-IC	2.2V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
52	-	AP8822N-22PA	Vdet-IC	2.2V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
52	-	AP8822N-22PT	Vdet-IC	2.2V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
52	-	BAV199T	Si-diode	Dual, Sw, 85V, 125mA, 225mW, Vf<1.25V(150mA), >3µs, 2pF	SOT-523	16dl	-	3b	Di
52	-	CHDTC114WMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=10k/4.7k	SOT-723	18ta	-	3a	Chm
52	-	DTA123YE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 220MHz, R1/R2=2k2/10k	SOT-416	16ta	-	3a	Rhm
52	-	DTA123YKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 220MHz, R1/R2=2k2/10k	SOT-346	16ta	-	3a	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
52	-	DTA123YUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 220MHz, R1/R2=2k2/10k	UMT3	16ta	-	3a	Rhm
52	-	ELM9752NBB	Vdet-IC	5.2V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
52	-	ELM9852BB	LVR-IC	5.2V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
52	-	PDTA143ZEF	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k	SOT-490	18ta	-	3a	Nxp
52	-	PDTC143TK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k	SC-59	16ta	-	3a	Nxp
520	-	FMMT6520	Si-pnp	Vid, 350/350V, 500mA, 330mW, B=30..200, >50MHz	SOT-23	16ta	-	3a	Zx
520	cm	XC9111A201MR	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
520AC	-	BL8509-520ACRM	Vdet-IC	5.2V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
520AC	-	LC9009CB3TR520AC	Vdet-IC	5.2V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
520AN	-	BL8509-520ANRM	Vdet-IC	5.2V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
520AN	-	LC9009CB3TR520AN	Vdet-IC	5.2V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
520BC	-	BL8509-520BCRM	Vdet-IC	5.2V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
520BC	-	LC9009CB3TR520BC	Vdet-IC	5.2V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
520BN	-	BL8509-520BNRM	Vdet-IC	5.2V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
520BN	-	LC9009CB3TR520BN	Vdet-IC	5.2V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
520CC	-	BL8509-520CCRM	Vdet-IC	5.2V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
520CC	-	LC9009CB3TR520CC	Vdet-IC	5.2V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
520CN	-	BL8509-520CNRM	Vdet-IC	5.2V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
520CN	-	LC9009CB3TR520CN	Vdet-IC	5.2V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
520DC	-	BL8509-520DCRM	Vdet-IC	5.2V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
520DC	-	LC9009CB3TR520DC	Vdet-IC	5.2V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
520DN	-	BL8509-520DNRM	Vdet-IC	5.2V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
520DN	-	LC9009CB3TR520DN	Vdet-IC	5.2V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
520EC	-	BL8509-520ECRM	Vdet-IC	5.2V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
520EC	-	LC9009CB3TR520EC	Vdet-IC	5.2V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
520EN	-	BL8509-520ENRM	Vdet-IC	5.2V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
520EN	-	LC9009CB3TR520EN	Vdet-IC	5.2V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
520FC	-	BL8509-520FCRM	Vdet-IC	5.2V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
520FC	-	LC9009CB3TR520FC	Vdet-IC	5.2V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
520FN	-	BL8509-520FNRM	Vdet-IC	5.2V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
520FN	-	LC9009CB3TR520FN	Vdet-IC	5.2V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
520GC	-	BL8509-520GCRM	Vdet-IC	5.2V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
520GC	-	LC9009CB3TR520GC	Vdet-IC	5.2V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
520GN	-	BL8509-520GNRM	Vdet-IC	5.2V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
520GN	-	LC9009CB3TR520GN	Vdet-IC	5.2V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
521	cm	XC9111A211MR	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
522	cm	XC9111A221MR	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
523	cm	XC9111A231MR	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
524	cm	XC9111A241MR	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
525	cm	XC9111A251MR	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
526	cm	XC9111A261MR	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
527	cm	XC9111A271MR	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
528	cm	XC9111A281MR	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
529	cm	XC9111A291MR	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
52A	-	AAT60052A-S2	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
52B	-	AAT60052B-S2	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
52B	-	MMBZ5252BPT	Z-diode	22.80..25.20V, Izt=5mA, Zzt=62Ω, 225mW	SOT-23	16dc	-	3a	Chm
52C	-	AAT60052C-S2	Vdet-IC	5.2V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
52D	-	AAT60052D-S2	Vdet-IC	5.2V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
52S	-	MMBZ5252SPT	Z-diode	23.52..24.48V, Izt=5mA, Zzt=62Ω, 225mW	SOT-23	16dc	-	3a	Chm
53	-	AP8822N-23GA	Vdet-IC	2.3V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
53	-	AP8822N-23GT	Vdet-IC	2.3V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
53	-	AP8822N-23PA	Vdet-IC	2.3V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
53	-	AP8822N-23PT	Vdet-IC	2.3V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
53	-	BAT17	Si-diode	Schottky, UHF-Mix, 4V, 130mA, Vf<0.6V(10mA), Cd<0.75pF	SOT-23	16dc	-	3a	Sie
53	-	BAW156T	Si-diode	Dual, Sw, 85V, 125mA, 225mW, Vf<1.25V(150mA), >3µs, 2pF	SOT-523	16df	-	3b	Di
53	-	CHDTC115EMPT	Si-npn-Digi	Sw, 50V, 20mA, 250MHz, R1/R2=100k/100k	SOT-723	18ta	-	3a	Chm
53	-	ELM9753NBB	Vdet-IC	5.3V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
53	-	ELM9853BB	LVR-IC	5.3V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
53	-	PDTC143ZEF	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k	SOT-490	18ta	-	3a	Nxp
53	-	PDTC144TK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=47k	SC-59	16ta	-	3a	Nxp
-53	-	PDTC143XU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	SOT-490	16ta	-	3a	NxH
530	cm	XC9111A301MR	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
530AC	-	BL8509-530ACRM	Vdet-IC	5.3V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
530AC	-	LC9009CB3TR530AC	Vdet-IC	5.3V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
530AN	-	BL8509-530ANRM	Vdet-IC	5.3V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
530AN	-	LC9009CB3TR530AN	Vdet-IC	5.3V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
530BC	-	BL8509-530BCRM	Vdet-IC	5.3V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
530BC	-	LC9009CB3TR530BC	Vdet-IC	5.3V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
530BN	-	BL8509-530BNRM	Vdet-IC	5.3V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
530BN	-	LC9009CB3TR530BN	Vdet-IC	5.3V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
530CC	-	BL8509-530CCRM	Vdet-IC	5.3V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
530CC	-	LC9009CB3TR530CC	Vdet-IC	5.3V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
530CN	-	BL8509-530CNRM	Vdet-IC	5.3V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
530CN	-	LC9009CB3TR530CN	Vdet-IC	5.3V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
530DC	-	BL8509-530DCRM	Vdet-IC	5.3V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
530DC	-	LC9009CB3TR530DC	Vdet-IC	5.3V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
530DN	-	BL8509-530DNRM	Vdet-IC	5.3V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
530DN	-	LC9009CB3TR530DN	Vdet-IC	5.3V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
530EC	-	BL8509-530ECRM	Vdet-IC	5.3V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
530EC	-	LC9009CB3TR530EC	Vdet-IC	5.3V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
530EN	-	BL8509-530ENRM	Vdet-IC	5.3V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
530EN	-	LC9009CB3TR530EN	Vdet-IC	5.3V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
530FC	-	BL8509-530FCRM	Vdet-IC	5.3V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
530FC	-	LC9009CB3TR530FC	Vdet-IC	5.3V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
530FN	-	BL8509-530FNRM	Vdet-IC	5.3V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
530FN	-	LC9009CB3TR530FN	Vdet-IC	5.3V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
530GC	-	BL8509-530GCRM	Vdet-IC	5.3V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
530GC	-	LC9009CB3TR530GC	Vdet-IC	5.3V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
530GN	-	BL8509-530GNRM	Vdet-IC	5.3V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
530GN	-	LC9009CB3TR530GN	Vdet-IC	5.3V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
531	cm	XC9111A311MR	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
5315	-	BL8553-15PRM	LVR-IC	LDO, 1.5V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5315	-	LC1253CB3TR15	LVR-IC	LDO, 1.5V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5316	-	BL8553-16PRM	LVR-IC	LDO, 1.6V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5316	-	LC1253CB3TR16	LVR-IC	LDO, 1.6V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5317	-	BL8553-17PRM	LVR-IC	LDO, 1.7V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5317	-	LC1253CB3TR17	LVR-IC	LDO, 1.7V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5318	-	BL8553-18PRM	LVR-IC	LDO, 1.8V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5318	-	LC1253CB3TR18	LVR-IC	LDO, 1.8V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5319	-	BL8553-19PRM	LVR-IC	LDO, 1.9V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5319	-	LC1253CB3TR19	LVR-IC	LDO, 1.9V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
532	cm	XC9111A321MR	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
5320	-	BL8553-20PRM	LVR-IC	LDO, 2.0V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5320	-	LC1253CB3TR20	LVR-IC	LDO, 2.0V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5321	-	BL8553-21PRM	LVR-IC	LDO, 2.1V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5321	-	LC1253CB3TR21	LVR-IC	LDO, 2.1V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5322	-	BL8553-22PRM	LVR-IC	LDO, 2.2V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5322	-	LC1253CB3TR22	LVR-IC	LDO, 2.2V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5323	-	BL8553-23PRM	LVR-IC	LDO, 2.3V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5323	-	LC1253CB3TR23	LVR-IC	LDO, 2.3V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5324	-	BL8553-24PRM	LVR-IC	LDO, 2.4V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5324	-	LC1253CB3TR24	LVR-IC	LDO, 2.4V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5325	-	BL8553-25PRM	LVR-IC	LDO, 2.5V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5325	-	LC1253CB3TR25	LVR-IC	LDO, 2.5V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5326	-	BL8553-26PRM	LVR-IC	LDO, 2.6V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5326	-	LC1253CB3TR26	LVR-IC	LDO, 2.6V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5327	-	BL8553-27PRM	LVR-IC	LDO, 2.7V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5327	-	LC1253CB3TR27	LVR-IC	LDO, 2.7V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5328	-	BL8553-28PRM	LVR-IC	LDO, 2.8V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5328	-	LC1253CB3TR28	LVR-IC	LDO, 2.8V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5329	-	BL8553-29PRM	LVR-IC	LDO, 2.9V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5329	-	LC1253CB3TR29	LVR-IC	LDO, 2.9V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
533	cm	XC9111A331MR	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
5330	-	BL8553-30PRM	LVR-IC	LDO, 3.0V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5330	-	LC1253CB3TR30	LVR-IC	LDO, 3.0V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5331	-	BL8553-31PRM	LVR-IC	LDO, 3.1V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5331	-	LC1253CB3TR31	LVR-IC	LDO, 3.1V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5332	-	BL8553-32PRM	LVR-IC	LDO, 3.2V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5332	-	LC1253CB3TR32	LVR-IC	LDO, 3.2V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5333	-	BL8553-33PRM	LVR-IC	LDO, 3.3V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5333	-	LC1253CB3TR33	LVR-IC	LDO, 3.3V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5334	-	BL8553-34PRM	LVR-IC	LDO, 3.4V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5334	-	LC1253CB3TR34	LVR-IC	LDO, 3.4V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5335	-	BL8553-35PRM	LVR-IC	LDO, 3.5V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5335	-	LC1253CB3TR35	LVR-IC	LDO, 3.5V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5336	-	BL8553-36PRM	LVR-IC	LDO, 3.6V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5336	-	LC1253CB3TR36	LVR-IC	LDO, 3.6V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5337	-	BL8553-37PRM	LVR-IC	LDO, 3.7V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5337	-	LC1253CB3TR37	LVR-IC	LDO, 3.7V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5338	-	BL8553-38PRM	LVR-IC	LDO, 3.8V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5338	-	LC1253CB3TR38	LVR-IC	LDO, 3.8V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5339	-	BL8553-39PRM	LVR-IC	LDO, 3.9V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5339	-	LC1253CB3TR39	LVR-IC	LDO, 3.9V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
534	cm	XC9111A341MR	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
5340	-	BL8553-40PRM	LVR-IC	LDO, 4.0V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5340	-	LC1253CB3TR40	LVR-IC	LDO, 4.0V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5341	-	BL8553-41PRM	LVR-IC	LDO, 4.1V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5341	-	LC1253CB3TR41	LVR-IC	LDO, 4.1V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5342	-	BL8553-42PRM	LVR-IC	LDO, 4.2V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5342	-	LC1253CB3TR42	LVR-IC	LDO, 4.2V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5343	-	BL8553-43PRM	LVR-IC	LDO, 4.3V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5343	-	LC1253CB3TR43	LVR-IC	LDO, 4.3V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5344	-	BL8553-44PRM	LVR-IC	LDO, 4.4V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5344	-	LC1253CB3TR44	LVR-IC	LDO, 4.4V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5345	-	BL8553-45PRM	LVR-IC	LDO, 4.5V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5345	-	LC1253CB3TR45	LVR-IC	LDO, 4.5V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5346	-	BL8553-46PRM	LVR-IC	LDO, 4.6V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5346	-	LC1253CB3TR46	LVR-IC	LDO, 4.6V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5347	-	BL8553-47PRM	LVR-IC	LDO, 4.7V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5347	-	LC1253CB3TR47	LVR-IC	LDO, 4.7V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5348	-	BL8553-48PRM	LVR-IC	LDO, 4.8V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5348	-	LC1253CB3TR48	LVR-IC	LDO, 4.8V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5349	-	BL8553-49PRM	LVR-IC	LDO, 4.9V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5349	-	LC1253CB3TR49	LVR-IC	LDO, 4.9V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
535	cm	XC9111A351MR	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
5350	-	BL8553-50PRM	LVR-IC	LDO, 5.0V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5350	-	LC1253CB3TR50	LVR-IC	LDO, 5.0V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5351	-	BL8553-51PRM	LVR-IC	LDO, 5.1V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5351	-	LC1253CB3TR51	LVR-IC	LDO, 5.1V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5352	-	BL8553-52PRM	LVR-IC	LDO, 5.2V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5352	-	LC1253CB3TR52	LVR-IC	LDO, 5.2V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5353	-	BL8553-53PRM	LVR-IC	LDO, 5.3V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5353	-	LC1253CB3TR53	LVR-IC	LDO, 5.3V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5354	-	BL8553-54PRM	LVR-IC	LDO, 5.4V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5354	-	LC1253CB3TR54	LVR-IC	LDO, 5.4V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5355	-	BL8553-55PRM	LVR-IC	LDO, 5.5V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5355	-	LC1253CB3TR55	LVR-IC	LDO, 5.5V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5356	-	BL8553-56PRM	LVR-IC	LDO, 5.6V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5356	-	LC1253CB3TR56	LVR-IC	LDO, 5.6V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5357	-	BL8553-57PRM	LVR-IC	LDO, 5.7V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5357	-	LC1253CB3TR57	LVR-IC	LDO, 5.7V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5358	-	BL8553-58PRM	LVR-IC	LDO, 5.8V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5358	-	LC1253CB3TR58	LVR-IC	LDO, 5.8V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
5359	-	BL8553-59PRM	LVR-IC	LDO, 5.9V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5359	-	LC1253CB3TR59	LVR-IC	LDO, 5.9V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
536	cm	XC9111A361MR	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
5360	-	BL8553-60PRM	LVR-IC	LDO, 6.0V±2%, 200mA	SOT-23	16vj	VR1	3a	Shb
5360	-	LC1253CB3TR60	LVR-IC	LDO, 6.0V±2%, 400mA	SOT-23	16cg	VR1	3a	Lch
537	cm	XC9111A371MR	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
538	cm	XC9111A381MR	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
539	cm	XC9111A391MR	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
53A	-	AAT60053A-S2	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
53B	-	AAT60053B-S2	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
53B	-	MMBZ5253BPT	Z-diode	23.75..26.25V, Izt=5mA, Zzt=62Ω, 225mW	SOT-23	16dc	-	3a	Chm
53C	-	AAT60053C-S2	Vdet-IC	5.3V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
53D	-	AAT60053D-S2	Vdet-IC	5.3V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
53S	-	MMBZ5253SPT	Z-diode	24.50..25.50V, Izt=5mA, Zzt=62Ω, 225mW	SOT-23	16dc	-	3a	Chm
53S	-	MMCZ5253SPT	Z-diode	24.50..25.50V, Izt=5mA, Zzt=62Ω, 225mW	SOT-346	16dc	-	3a	Chm
54	-	AP8822N-24GA	Vdet-IC	2.4V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
54	-	AP8822N-24GT	Vdet-IC	2.4V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
54	-	AP8822N-24PA	Vdet-IC	2.4V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
54	-	AP8822N-24PT	Vdet-IC	2.4V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
54	-	BAT17-04	Si-diode	Dual, Schottky, 4V, 130mA, Vf<0.6V(10mA), Cd<0.75pF	SOT-23	16dl	-	3a	Sie
54	-	CHDTC123EMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/2.2k	SOT-723	18ta	-	3a	Chm
54	-	DTA114YE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/47k	SOT-416	16ta	-	3a	Rhm
54	-	DTA114YKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/47k	SOT-346	16ta	-	3a	Rhm
54	-	DTA114YM	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10k/47k	VMT3	18ta	-	3a	Rhm
54	-	DTA114YUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/47k	UMT3	16ta	-	3a	Rhm
54	-	ELM9754NBB	Vdet-IC	5.4V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
54	-	ELM9854BB	LVR-IC	5.4V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
54	-	PDTA114YK	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k	SC-59	16ta	-	3a	Nxp
54	-	PDTC143XEF	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=4.7k/10k	SOT-416	18ta	-	3a	Nxp
54	-	ZMDC953TA	C-diode	Dual, Hyperabrupt varicap, 12V, 100mA, 45/37pF(0.5..1.5V)	SOT-323	16dg	-	3a	Zx
540	cm	XC9111A401MR	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
540AC	-	BL8509-540ACRM	Vdet-IC	5.4V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
540AC	-	LC9009CB3TR540AC	Vdet-IC	5.4V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
540AN	-	BL8509-540ANRM	Vdet-IC	5.4V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
540AN	-	LC9009CB3TR540AN	Vdet-IC	5.4V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
540BC	-	BL8509-540BCRM	Vdet-IC	5.4V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
540BC	-	LC9009CB3TR540BC	Vdet-IC	5.4V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
540BN	-	BL8509-540BNRM	Vdet-IC	5.4V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
540BN	-	LC9009CB3TR540BN	Vdet-IC	5.4V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
540CC	-	BL8509-540CCRM	Vdet-IC	5.4V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
540CC	-	LC9009CB3TR540CC	Vdet-IC	5.4V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
540CN	-	BL8509-540CNRM	Vdet-IC	5.4V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
540CN	-	LC9009CB3TR540CN	Vdet-IC	5.4V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
540DC	-	BL8509-540DCRM	Vdet-IC	5.4V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
540DC	-	LC9009CB3TR540DC	Vdet-IC	5.4V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
540DN	-	BL8509-540DNRM	Vdet-IC	5.4V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
540DN	-	LC9009CB3TR540DN	Vdet-IC	5.4V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
540EC	-	BL8509-540ECRM	Vdet-IC	5.4V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
540EC	-	LC9009CB3TR540EC	Vdet-IC	5.4V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
540EN	-	BL8509-540ENRM	Vdet-IC	5.4V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
540EN	-	LC9009CB3TR540EN	Vdet-IC	5.4V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
540FC	-	BL8509-540FCRM	Vdet-IC	5.4V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
540FC	-	LC9009CB3TR540FC	Vdet-IC	5.4V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
540FN	-	BL8509-540FNRM	Vdet-IC	5.4V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
540FN	-	LC9009CB3TR540FN	Vdet-IC	5.4V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
540GC	-	BL8509-540GCRM	Vdet-IC	5.4V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
540GC	-	LC9009CB3TR540GC	Vdet-IC	5.4V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
540GN	-	BL8509-540GNRM	Vdet-IC	5.4V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
540GN	-	LC9009CB3TR540GN	Vdet-IC	5.4V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
541	cm	XC9111A411MR	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
542	cm	XC9111A421MR	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
543	cm	XC9111A431MR	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
544	cm	XC9111A441MR	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
545	cm	XC9111A451MR	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
546	cm	XC9111A461MR	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
547	cm	XC9111A471MR	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
548	cm	XC9111A481MR	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
549	-	FMMT549	Si-pnp	GP, 35V, 1A, 500mW, B=100..300, >100MHz	SOT-23	16ta	-	3a	Zx
549	cm	XC9111A491MR	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
54A	-	AAT60054A-S2	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
54B	-	AAT60054B-S2	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
54B	-	MMBZ5254BPT	Z-diode	25.65..28.35V, Izt=5mA, Zzt=70Ω, 225mW	SOT-23	16dc	-	3a	Chm
54C	-	AAT60054C-S2	Vdet-IC	5.4V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
54C	-	CMUT5401	Si-pnp	HV, 160V, 600mA, 250mW, B=60..240, 300MHz	SOT-523F	18ta	-	3a	Cen
54D	-	AAT60054D-S2	Vdet-IC	5.4V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
54s	-	BAT17-04W	Si-diode	Dual, Schottky, 4V, 130mA, Vf<0.6V(10mA), Cd<0.75pF	SOT-323	16dl	-	3a	Sie
54S	-	MMBZ5254SPT	Z-diode	26.46..27.54V, Izt=5mA, Zzt=70Ω, 225mW	SOT-23	16dc	-	3a	Chm
54S	-	MMCZ5254SPT	Z-diode	26.46..27.54V, Izt=5mA, Zzt=70Ω, 225mW	SOT-346	16dc	-	3a	Chm
55	-	AP8822N-25GA	Vdet-IC	2.5V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
55	-	AP8822N-25GT	Vdet-IC	2.5V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
55	-	AP8822N-25PA	Vdet-IC	2.5V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
55	-	AP8822N-25PT	Vdet-IC	2.5V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
55	-	BAT17-05	Si-diode	Dual, Schottky, 4V, 130mA, Vf<0.6V(10mA), Cd<0.75pF	SOT-23	16dg	-	3a	Sie
55	-	CHDTC123JMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/47k	SOT-723	18ta	-	3a	Chm
55	-	ELM9755NBB	Vdet-IC	5.5V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
55	-	ELM9855BB	LVR-IC	5.5V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
55	-	FSD273TA-A	C-diode	Dual, Hyperabrupt varicap, 12V, 100mA, 45/32.5pF(0.5..1.5V)	SOT-323	16dg	-	3a	Zx
550	cm	XC9111A501MR	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
550AC	-	BL8509-550ACRM	Vdet-IC	5.5V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
550AC	-	LC9009CB3TR550AC	Vdet-IC	5.5V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
550AN	-	BL8509-550ANRM	Vdet-IC	5.5V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
550AN	-	LC9009CB3TR550AN	Vdet-IC	5.5V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
550BC	-	BL8509-550BCRM	Vdet-IC	5.5V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
550BC	-	LC9009CB3TR550BC	Vdet-IC	5.5V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
550BN	-	BL8509-550BNRM	Vdet-IC	5.5V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
550BN	-	LC9009CB3TR550BN	Vdet-IC	5.5V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
550CC	-	BL8509-550CCRM	Vdet-IC	5.5V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
550CC	-	LC9009CB3TR550CC	Vdet-IC	5.5V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
550CN	-	BL8509-550CNRM	Vdet-IC	5.5V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
550CN	-	LC9009CB3TR550CN	Vdet-IC	5.5V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
550DC	-	BL8509-550DCRM	Vdet-IC	5.5V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
550DC	-	LC9009CB3TR550DC	Vdet-IC	5.5V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
550DN	-	BL8509-550DNRM	Vdet-IC	5.5V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
550DN	-	LC9009CB3TR550DN	Vdet-IC	5.5V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
550EC	-	BL8509-550ECRM	Vdet-IC	5.5V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
550EC	-	LC9009CB3TR550EC	Vdet-IC	5.5V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
550EN	-	BL8509-550ENRM	Vdet-IC	5.5V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
550EN	-	LC9009CB3TR550EN	Vdet-IC	5.5V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
550FC	-	BL8509-550FCRM	Vdet-IC	5.5V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
550FC	-	LC9009CB3TR550FC	Vdet-IC	5.5V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
550FN	-	BL8509-550FNRM	Vdet-IC	5.5V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
550FN	-	LC9009CB3TR550FN	Vdet-IC	5.5V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
550GC	-	BL8509-550GCRM	Vdet-IC	5.5V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
550GC	-	LC9009CB3TR550GC	Vdet-IC	5.5V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
550GN	-	BL8509-550GNRM	Vdet-IC	5.5V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
550GN	-	LC9009CB3TR550GN	Vdet-IC	5.5V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
551	-	FMMT551	Si-pnp	AF, 80V, 1A, 500mW, B=50..150, >150MHz	SOT-23	16ta	-	3a	Zx
551	cm	XC9111A511MR	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
552	cm	XC9111A521MR	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
553	cm	XC9111A531MR	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
554	cm	XC9111A541MR	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
555	-	FMMT555	Si-pnp	Vid, 160V, 1A, 500mW, B=50..300, >100MHz	SOT-23	16ta	-	3a	Zx
555	cm	XC9111A551MR	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
556	cm	XC9111A561MR	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
557	cm	XC9111A571MR	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
558	-	FMMT558	Si-pnp	Vid, 400V, 150mA, 500mW, B=100..300, >50MHz	SOT-23	16ta	-	3a	Zx
558	cm	XC9111A581MR	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
559	cm	XC9111A591MR	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
55A	-	AAT60055A-S2	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
55A	-	UM14225S	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55B	-	AAT60055B-S2	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
55B	-	MMBZ5255BPT	Z-diode	26.60..29.40V, Izt=5mA, Zzt=44Ω, 225mW	SOT-23	16dc	-	3a	Chm
55B	-	UM14226S	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55C	-	AAT60055C-S2	Vdet-IC	5.5V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Aat
55C	-	CMUT5551	Si-npn	HV, 180V, 600mA, 250mW, B=80..250, 300MHz	SOT-523F	18ta	-	3a	Cen
55C	-	UM14227S	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55D	-	AAT60055D-S2	Vdet-IC	5.5V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Aat
55D	-	UM14228S	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55E	-	UM14229S	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55F	-	UM14230S	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55H	-	UM14231S	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55J	-	UM14234S	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55K	-	UM14235S	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55L	-	UM14232S	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55M	-	UM14233S	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55N	-	UM14236S	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55P	-	UM14237S	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55Q	-	UM14238S	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55R	-	UM14239S	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55s	-	BAT17-05W	Si-diode	Dual, Schottky, 4V, 130mA, Vf<0.6V(10mA), Cd<0.75pF	SOT-323	16df	-	3a	Sie
55S	-	MMBZ5255SPT	Z-diode	27.44..28.56V, Izt=5mA, Zzt=44Ω, 225mW	SOT-23	16dc	-	3a	Chm
55S	-	MMCZ5255SPT	Z-diode	27.44..28.56V, Izt=5mA, Zzt=44Ω, 225mW	SOT-346	16dc	-	3a	Chm
55S	-	UM14240S	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55T	-	UM14241S	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55U	-	UM14243S	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55Y	-	UM14242S	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
55Z	-	UM14244S	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
56	-	AP8822N-26GA	Vdet-IC	2.6V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
56	-	AP8822N-26GT	Vdet-IC	2.6V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
56	-	AP8822N-26PA	Vdet-IC	2.6V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
56	-	AP8822N-26PT	Vdet-IC	2.6V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
56	-	BAT17-06	Si-diode	Dual, Schottky, 4V, 130mA, Vf<0.6V(10mA), Cd<0.75pF	SOT-23	16df	-	3a	Sie
56	-	CHDTC123YMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/10k	SOT-723	18ta	-	3a	Chm
56	-	ELM9856BB	LVR-IC	5.6V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
56	-	FSD273TA-B	C-diode	Dual, Hyperabrupt varicap, 12V, 100mA, 45/34.7pF(0.5..1.5V)	SOT-323	16dg	-	3a	Zx
56	-	PDTC115EK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k	SC-59	16ta	-	3a	Nxp

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
560	-	HZM5.6NB	Z-diode	5.31..5.92V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
560	cm	XC9111A601MR	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
560AC	-	BL8509-560ACRM	Vdet-IC	5.6V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
560AC	-	LC9009CB3TR560AC	Vdet-IC	5.6V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
560AN	-	BL8509-560ANRM	Vdet-IC	5.6V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
560AN	-	LC9009CB3TR560AN	Vdet-IC	5.6V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
560BC	-	BL8509-560BCRM	Vdet-IC	5.6V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
560BC	-	LC9009CB3TR560BC	Vdet-IC	5.6V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
560BN	-	BL8509-560BNRM	Vdet-IC	5.6V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
560BN	-	LC9009CB3TR560BN	Vdet-IC	5.6V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
560CC	-	BL8509-560CCRM	Vdet-IC	5.6V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
560CC	-	LC9009CB3TR560CC	Vdet-IC	5.6V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
560CN	-	BL8509-560CNRM	Vdet-IC	5.6V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
560CN	-	LC9009CB3TR560CN	Vdet-IC	5.6V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
560DC	-	BL8509-560DCRM	Vdet-IC	5.6V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
560DC	-	LC9009CB3TR560DC	Vdet-IC	5.6V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
560DN	-	BL8509-560DNRM	Vdet-IC	5.6V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
560DN	-	LC9009CB3TR560DN	Vdet-IC	5.6V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
560EC	-	BL8509-560ECRM	Vdet-IC	5.6V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
560EC	-	LC9009CB3TR560EC	Vdet-IC	5.6V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
560EN	-	BL8509-560ENRM	Vdet-IC	5.6V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
560EN	-	LC9009CB3TR560EN	Vdet-IC	5.6V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
560FC	-	BL8509-560FCRM	Vdet-IC	5.6V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
560FC	-	LC9009CB3TR560FC	Vdet-IC	5.6V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
560FN	-	BL8509-560FNRM	Vdet-IC	5.6V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
560FN	-	LC9009CB3TR560FN	Vdet-IC	5.6V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
560GC	-	BL8509-560GCRM	Vdet-IC	5.6V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
560GC	-	LC9009CB3TR560GC	Vdet-IC	5.6V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
560GN	-	BL8509-560GNRM	Vdet-IC	5.6V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
560GN	-	LC9009CB3TR560GN	Vdet-IC	5.6V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
561	-	HZM5.6NB1	Z-diode	5.31..5.55V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
561	-	PZM5.6NB1	Z-diode	5.6V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
561	cm	XC9111A611MR	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
562	-	HZM5.6NB2	Z-diode	5.49..5.73V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
562	-	PZM5.6NB2	Z-diode	5.6V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
562	cm	XC9111A621MR	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
563	-	HZM5.6NB3	Z-diode	5.67..5.92V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
563	-	PZM5.6NB3	Z-diode	5.6V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
563	cm	XC9111A631MR	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
564	cm	XC9111A641MR	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
565	cm	XC9111A651MR	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
566	cm	XC9111A661MR	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
567	cm	XC9111A671MR	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
568	cm	XC9111A681MR	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
569	cm	XC9111A691MR	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
56A	-	UM14245S	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
56B	-	MMBZ5256BPT	Z-diode	28.50..31.50V, Izt=5mA, Zzt=78Ω, 225mW	SOT-23	16dc	-	3a	Chm
56B	-	UM14246S	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
56C	-	UM14247S	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
56D	-	UM14248S	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
56E	-	UM14249S	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
56F	-	UM14250S	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-23	16cg	VR1	3c	Uns
56s	-	BAT17-06W	Si-diode	Dual, Schottky, 4V, 130mA, Vf<0.6V(10mA), Cd<0.75pF	SOT-323	16dg	-	3a	Sie
56S	-	MMBZ5256SPT	Z-diode	29.40..30.60V, Izt=5mA, Zzt=78Ω, 225mW	SOT-23	16dc	-	3a	Chm
56S	-	MMCZ5256SPT	Z-diode	29.40..30.60V, Izt=5mA, Zzt=78Ω, 225mW	SOT-346	16dc	-	3a	Chm
56V	-	PZM56NB	Z-diode	56V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
57	-	AP8822N-27GA	Vdet-IC	2.7V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
57	-	AP8822N-27GT	Vdet-IC	2.7V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
57	-	AP8822N-27PA	Vdet-IC	2.7V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
57	-	AP8822N-27PT	Vdet-IC	2.7V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
57	-	CHDTC124EMPT	Si-npn-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=22k/22k	SOT-723	18ta	-	3a	Chm
57	-	ELM9857BB	LVR-IC	5.7V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
57	-	FSD273TA-C	C-diode	Dual, Hyperabrupt varicap, 12V, 100mA, 45/37pF(0.5..1.5V)	SOT-323	16dg	-	3a	Zx
570	cm	XC9111A701MR	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA	SOT-23	16ss	DC2	3d	Tor
570AC	-	BL8509-570ACRM	Vdet-IC	5.7V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
570AC	-	LC9009CB3TR570AC	Vdet-IC	5.7V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
570AN	-	BL8509-570ANRM	Vdet-IC	5.7V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
570AN	-	LC9009CB3TR570AN	Vdet-IC	5.7V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
570BC	-	BL8509-570BCRM	Vdet-IC	5.7V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
570BC	-	LC9009CB3TR570BC	Vdet-IC	5.7V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
570BN	-	BL8509-570BNRM	Vdet-IC	5.7V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
570BN	-	LC9009CB3TR570BN	Vdet-IC	5.7V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
570CC	-	BL8509-570CCRM	Vdet-IC	5.7V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
570CC	-	LC9009CB3TR570CC	Vdet-IC	5.7V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
570CN	-	BL8509-570CNRM	Vdet-IC	5.7V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
570CN	-	LC9009CB3TR570CN	Vdet-IC	5.7V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
570DC	-	BL8509-570DCRM	Vdet-IC	5.7V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
570DC	-	LC9009CB3TR570DC	Vdet-IC	5.7V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
570DN	-	BL8509-570DNRM	Vdet-IC	5.7V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
570DN	-	LC9009CB3TR570DN	Vdet-IC	5.7V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
570EC	-	BL8509-570ECRM	Vdet-IC	5.7V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
570EC	-	LC9009CB3TR570EC	Vdet-IC	5.7V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
570EN	-	BL8509-570ENRM	Vdet-IC	5.7V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
570EN	-	LC9009CB3TR570EN	Vdet-IC	5.7V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
570FC	-	BL8509-570FCRM	Vdet-IC	5.7V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
570FC	-	LC9009CB3TR570FC	Vdet-IC	5.7V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
570FN	-	BL8509-570FNRM	Vdet-IC	5.7V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
570FN	-	LC9009CB3TR570FN	Vdet-IC	5.7V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
570GC	-	BL8509-570GCRM	Vdet-IC	5.7V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
570GC	-	LC9009CB3TR570GC	Vdet-IC	5.7V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
570GN	-	BL8509-570GNRM	Vdet-IC	5.7V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
570GN	-	LC9009CB3TR570GN	Vdet-IC	5.7V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
576	-	FMMT576	Si-pnp	Vid, 200V, 1A, 500mW, B=50..300, >100MHz	SOT-23	16ta	-	3a	Zx
57B	-	MMBZ5257BPT	Z-diode	31.35..34.65V, Izt=5mA, Zzt=88Ω, 225mW	SOT-23	16dc	-	3a	Chm
57S	-	MMBZ5257SPT	Z-diode	32.34..33.66V, Izt=5mA, Zzt=88Ω, 225mW	SOT-23	16dc	-	3a	Chm
57S	-	MMCZ5257SPT	Z-diode	32.34..33.66V, Izt=5mA, Zzt=88Ω, 225mW	SOT-346	16dc	-	3a	Chm
58	-	AP8822N-28GA	Vdet-IC	2.8V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
58	-	AP8822N-28GT	Vdet-IC	2.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
58	-	AP8822N-28PA	Vdet-IC	2.8V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
58	-	AP8822N-28PT	Vdet-IC	2.8V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
58	-	CHDTC124XMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=22k/47k	SOT-723	18ta	-	3a	Chm
58	-	ELM9858BB	LVR-IC	5.8V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
58	-	PDTA144TK	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=47k	SC-59	16ta	-	3a	Nxp
580AC	-	BL8509-580ACRM	Vdet-IC	5.8V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
580AC	-	LC9009CB3TR580AC	Vdet-IC	5.8V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
580AN	-	BL8509-580ANRM	Vdet-IC	5.8V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
580AN	-	LC9009CB3TR580AN	Vdet-IC	5.8V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
580BC	-	BL8509-580BCRM	Vdet-IC	5.8V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
580BC	-	LC9009CB3TR580BC	Vdet-IC	5.8V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
580BN	-	BL8509-580BNRM	Vdet-IC	5.8V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
580BN	-	LC9009CB3TR580BN	Vdet-IC	5.8V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
580CC	-	BL8509-580CCRM	Vdet-IC	5.8V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
580CC	-	LC9009CB3TR580CC	Vdet-IC	5.8V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
580CN	-	BL8509-580CNRM	Vdet-IC	5.8V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
580CN	-	LC9009CB3TR580CN	Vdet-IC	5.8V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
580DC	-	BL8509-580DCRM	Vdet-IC	5.8V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
580DC	-	LC9009CB3TR580DC	Vdet-IC	5.8V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
580DN	-	BL8509-580DNRM	Vdet-IC	5.8V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
580DN	-	LC9009CB3TR580DN	Vdet-IC	5.8V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
580EC	-	BL8509-580ECRM	Vdet-IC	5.8V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
580EC	-	LC9009CB3TR580EC	Vdet-IC	5.8V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
580EN	-	BL8509-580ENRM	Vdet-IC	5.8V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
580EN	-	LC9009CB3TR580EN	Vdet-IC	5.8V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
580FC	-	BL8509-580FCRM	Vdet-IC	5.8V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
580FC	-	LC9009CB3TR580FC	Vdet-IC	5.8V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
580FN	-	BL8509-580FNRM	Vdet-IC	5.8V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
580FN	-	LC9009CB3TR580FN	Vdet-IC	5.8V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
580GC	-	BL8509-580GCRM	Vdet-IC	5.8V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
580GC	-	LC9009CB3TR580GC	Vdet-IC	5.8V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
580GN	-	BL8509-580GNRM	Vdet-IC	5.8V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
580GN	-	LC9009CB3TR580GN	Vdet-IC	5.8V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
589	-	CHT589PT	Si-pnp	AF, Sw, 30V, 1A, B=100..300, 100MHz	SOT-23	16ta	-	3a	Chm
589	-	FMMT589	Si-pnp	AF, 50V, 1A, 500mW, B=100..300, >100MHz	SOT-23	16ta	-	3a	Zx
589X	-	APL5508-15A	LVR-IC	LDO, 1.5V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58AX	-	APL5508-16A	LVR-IC	LDO, 1.6V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58B	-	MMBZ5258BPT	Z-diode	34.20..37.80V, Izt=5mA, Zzt=95Ω, 225mW	SOT-23	16dc	-	3a	Chm
58BX	-	APL5508-17A	LVR-IC	LDO, 1.7V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58CX	-	APL5508-18A	LVR-IC	LDO, 1.8V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58DX	-	APL5508-19A	LVR-IC	LDO, 1.9V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58EX	-	APL5508-20A	LVR-IC	LDO, 2.0V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
58FX	-	APL5508-21A	LVR-IC	LDO, 2.1V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58GX	-	APL5508-22A	LVR-IC	LDO, 2.2V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58HX	-	APL5508-23A	LVR-IC	LDO, 2.3V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58IX	-	APL5508-24A	LVR-IC	LDO, 2.4V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58JX	-	APL5508-25A	LVR-IC	LDO, 2.5V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58KX	-	APL5508-26A	LVR-IC	LDO, 2.6V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58LX	-	APL5508-27A	LVR-IC	LDO, 2.7V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58MX	-	APL5508-28A	LVR-IC	LDO, 2.8V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58NX	-	APL5508-29A	LVR-IC	LDO, 2.9V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58OX	-	APL5508-30A	LVR-IC	LDO, 3.0V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58PX	-	APL5508-31A	LVR-IC	LDO, 3.1V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58QX	-	APL5508-32A	LVR-IC	LDO, 3.2V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58R9X	-	APL5508R-15A	LVR-IC	LDO, 1.5V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RAX	-	APL5508R-16A	LVR-IC	LDO, 1.6V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RBX	-	APL5508R-17A	LVR-IC	LDO, 1.7V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RCX	-	APL5508R-18A	LVR-IC	LDO, 1.8V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RDX	-	APL5508R-19A	LVR-IC	LDO, 1.9V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58REX	-	APL5508R-20A	LVR-IC	LDO, 2.0V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RFX	-	APL5508R-21A	LVR-IC	LDO, 2.1V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RGX	-	APL5508R-22A	LVR-IC	LDO, 2.2V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RHX	-	APL5508R-23A	LVR-IC	LDO, 2.3V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RIX	-	APL5508R-24A	LVR-IC	LDO, 2.4V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RJX	-	APL5508R-25A	LVR-IC	LDO, 2.5V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RKX	-	APL5508R-26A	LVR-IC	LDO, 2.6V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RLX	-	APL5508R-27A	LVR-IC	LDO, 2.7V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RMX	-	APL5508R-28A	LVR-IC	LDO, 2.8V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RNX	-	APL5508R-29A	LVR-IC	LDO, 2.9V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58ROX	-	APL5508R-30A	LVR-IC	LDO, 3.0V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RPX	-	APL5508R-31A	LVR-IC	LDO, 3.1V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RQX	-	APL5508R-32A	LVR-IC	LDO, 3.2V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RRX	-	APL5508R-33A	LVR-IC	LDO, 3.3V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RSX	-	APL5508R-34A	LVR-IC	LDO, 3.4V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RTX	-	APL5508R-35A	LVR-IC	LDO, 3.5V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RUX	-	APL5508R-43A	LVR-IC	LDO, 4.3V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RVX	-	APL5508R-45A	LVR-IC	LDO, 4.5V±2%, 560mA	SOT-23	16ch	VR1	3a	Anp
58RX	-	APL5508-33A	LVR-IC	LDO, 3.3V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58S	-	MMBZ5258SPT	Z-diode	35.28..36.72V, Izt=5mA, Zzt=95Ω, 225mW	SOT-23	16dc	-	3a	Chm
58S	-	MMCZ5258SPT	Z-diode	35.28..36.72V, Izt=5mA, Zzt=95Ω, 225mW	SOT-346	16dc	-	3a	Chm
58SX	-	APL5508-34A	LVR-IC	LDO, 3.4V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58TX	-	APL5508-35A	LVR-IC	LDO, 3.5V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58UX	-	APL5508-43A	LVR-IC	LDO, 4.3V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
58VX	-	APL5508-45A	LVR-IC	LDO, 4.5V±2%, 560mA	SOT-23	16cg	VR1	3a	Anp
59	-	AP8822N-29GA	Vdet-IC	2.9V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
59	-	AP8822N-29GT	Vdet-IC	2.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
59	-	AP8822N-29PA	Vdet-IC	2.9V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
59	-	AP8822N-29PT	Vdet-IC	2.9V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
59	-	CHDTC143EMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/4.7k	SOT-723	18ta	-	3a	Chm
59	-	ELM7619HCB	Vdet-IC	1.9V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
59	-	ELM9859BB	LVR-IC	5.9V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
59	-	PDTA124TK	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=22k	SC-59	16ta	-	3a	Nxp
590AC	-	BL8509-590ACRM	Vdet-IC	5.9V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
590AC	-	LC9009CB3TR590AC	Vdet-IC	5.9V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
590AN	-	BL8509-590ANRM	Vdet-IC	5.9V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
590AN	-	LC9009CB3TR590AN	Vdet-IC	5.9V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
590BC	-	BL8509-590BCRM	Vdet-IC	5.9V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
590BC	-	LC9009CB3TR590BC	Vdet-IC	5.9V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
590BN	-	BL8509-590BNRM	Vdet-IC	5.9V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
590BN	-	LC9009CB3TR590BN	Vdet-IC	5.9V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
590CC	-	BL8509-590CCRM	Vdet-IC	5.9V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
590CC	-	LC9009CB3TR590CC	Vdet-IC	5.9V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
590CN	-	BL8509-590CNRM	Vdet-IC	5.9V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
590CN	-	LC9009CB3TR590CN	Vdet-IC	5.9V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
590DC	-	BL8509-590DCRM	Vdet-IC	5.9V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
590DC	-	LC9009CB3TR590DC	Vdet-IC	5.9V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
590DN	-	BL8509-590DNRM	Vdet-IC	5.9V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
590DN	-	LC9009CB3TR590DN	Vdet-IC	5.9V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
590EC	-	BL8509-590ECRM	Vdet-IC	5.9V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
590EC	-	LC9009CB3TR590EC	Vdet-IC	5.9V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
590EN	-	BL8509-590ENRM	Vdet-IC	5.9V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
590EN	-	LC9009CB3TR590EN	Vdet-IC	5.9V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
590FC	-	BL8509-590FCRM	Vdet-IC	5.9V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb
590FC	-	LC9009CB3TR590FC	Vdet-IC	5.9V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
590FN	-	BL8509-590FNRM	Vdet-IC	5.9V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
590FN	-	LC9009CB3TR590FN	Vdet-IC	5.9V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
590GC	-	BL8509-590GCRM	Vdet-IC	5.9V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
590GC	-	LC9009CB3TR590GC	Vdet-IC	5.9V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
590GN	-	BL8509-590GNRM	Vdet-IC	5.9V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
590GN	-	LC9009CB3TR590GN	Vdet-IC	5.9V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
591	-	CMMT591	Si-pnp	GP, 80V, 1A, 500mW, B=100..300, >150MHz	SOT-23	16ta	-	3a	Cdi
591	-	FMMT591	Si-pnp	AF, 80V, 1A, 500mW, B=100..300, >150MHz	SOT-23	16ta	-	3a	Zx
593	-	FMMT593	Si-pnp	AF, 120V, 1A, 500mW, B=100..300, >50MHz	SOT-23	16ta	-	3a	Zx
5946	-	CHT5946PT	Si-npn	AF, 50V, 5A, B=200..560, 400MHz	SOT-23	16ta	-	3a	Chm
596	-	FMMT596	Si-pnp	Vid, 220V, 300mA, 500mW, B=85..300, >150MHz	SOT-23	16ta	-	3a	Zx
597	-	FMMT597	Si-pnp	Sw, Vid, 300/300V, 200mA, 500mW, B=100..300, >75MHz	SOT-23	16ta	-	3a	Zx
599X	-	APL5509-15A	LVR-IC	LDO, 1.5V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59A	-	CMMT591A	Si-pnp	GP, 40V, 1A, 500mW, B>300, >150MHz	SOT-23	16ta	-	3a	Cdi
59A	-	FMMT549A	Si-pnp	GP, 35V, 1A, 500mW, B=150..500, >100MHz	SOT-23	16ta	-	3a	Zx
59AX	-	APL5509-16A	LVR-IC	LDO, 1.6V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59B	-	MMBZ5259BPT	Z-diode	37.05..40.95V, Izt=5mA, Zzt=130Ω, 225mW	SOT-23	16dc	-	3a	Chm
59BX	-	APL5509-17A	LVR-IC	LDO, 1.7V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59CX	-	APL5509-18A	LVR-IC	LDO, 1.8V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59DX	-	APL5509-19A	LVR-IC	LDO, 1.9V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59EX	-	APL5509-20A	LVR-IC	LDO, 2.0V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59FX	-	APL5509-21A	LVR-IC	LDO, 2.1V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59GX	-	APL5509-22A	LVR-IC	LDO, 2.2V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59HX	-	APL5509-23A	LVR-IC	LDO, 2.3V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59IX	-	APL5509-24A	LVR-IC	LDO, 2.4V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59JX	-	APL5509-25A	LVR-IC	LDO, 2.5V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59KX	-	APL5509-26A	LVR-IC	LDO, 2.6V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59LX	-	APL5509-27A	LVR-IC	LDO, 2.7V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59MX	-	APL5509-28A	LVR-IC	LDO, 2.8V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59NX	-	APL5509-29A	LVR-IC	LDO, 2.9V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59OX	-	APL5509-30A	LVR-IC	LDO, 3.0V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59PX	-	APL5509-31A	LVR-IC	LDO, 3.1V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59QX	-	APL5509-32A	LVR-IC	LDO, 3.2V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59R9X	-	APL5509R-15A	LVR-IC	LDO, 1.5V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RAX	-	APL5509R-16A	LVR-IC	LDO, 1.6V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RBX	-	APL5509R-17A	LVR-IC	LDO, 1.7V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RCX	-	APL5509R-18A	LVR-IC	LDO, 1.8V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RDX	-	APL5509R-19A	LVR-IC	LDO, 1.9V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59REX	-	APL5509R-20A	LVR-IC	LDO, 2.0V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RFX	-	APL5509R-21A	LVR-IC	LDO, 2.1V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RGX	-	APL5509R-22A	LVR-IC	LDO, 2.2V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RHX	-	APL5509R-23A	LVR-IC	LDO, 2.3V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RIX	-	APL5509R-24A	LVR-IC	LDO, 2.4V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RJX	-	APL5509R-25A	LVR-IC	LDO, 2.5V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RKX	-	APL5509R-26A	LVR-IC	LDO, 2.6V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RLX	-	APL5509R-27A	LVR-IC	LDO, 2.7V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RMX	-	APL5509R-28A	LVR-IC	LDO, 2.8V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RNX	-	APL5509R-29A	LVR-IC	LDO, 2.9V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59ROX	-	APL5509R-30A	LVR-IC	LDO, 3.0V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RPX	-	APL5509R-31A	LVR-IC	LDO, 3.1V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RQX	-	APL5509R-32A	LVR-IC	LDO, 3.2V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RRX	-	APL5509R-33A	LVR-IC	LDO, 3.3V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RSX	-	APL5509R-34A	LVR-IC	LDO, 3.4V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RTX	-	APL5509R-35A	LVR-IC	LDO, 3.5V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RUX	-	APL5509R-43A	LVR-IC	LDO, 4.3V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RVX	-	APL5509R-45A	LVR-IC	LDO, 4.5V±2%, 560mA	SOT-23	16vj	VR1	3a	Anp
59RX	-	APL5509-33A	LVR-IC	LDO, 3.3V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59S	-	MMBZ5259SPT	Z-diode	38.22..39.78V, Izt=5mA, Zzt=130Ω, 225mW	SOT-23	16dc	-	3a	Chm
59S	-	MMCZ5259SPT	Z-diode	38.22..39.78V, Izt=5mA, Zzt=130Ω, 225mW	SOT-346	16dc	-	3a	Chm
59SX	-	APL5509-34A	LVR-IC	LDO, 3.4V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59TX	-	APL5509-35A	LVR-IC	LDO, 3.5V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59UX	-	APL5509-43A	LVR-IC	LDO, 4.3V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
59VX	-	APL5509-45A	LVR-IC	LDO, 4.5V±2%, 560mA	SOT-23	16cj	VR1	3a	Anp
5A	-	2SC5557	Si-npn	RF, LN, 9V, 30mA, 100mW, B=100..160, 12.5GHz	SSSMini3	18ta	-	3a	Pan
5A	-	2SC5938-A	Si-npn	AF, Sw, 50V, 200mA, 150mW, 30MHz, B=200..700	SC-59	16ta	-	3a	Ish
5A	-	2SC5996-A	Si-npn	AF, Sw, 50V, 200mA, 150mW, 30MHz, B=200..700	SOT-323	16ta	-	3a	Ish
5A	-	BC807-16	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=100..250	SOT-23	16ta	-	3a	PhH
5A	-	BC807-16W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=100..250	SOT-323	16ta	-	3a	PhH



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5A	-	FMMD6050	Si-diode	Fast Sw, 70V, 200mA, Vf<1.1V(100mA), <2.5pF, <5ns	SOT-23	16dc	-	3a	Zx
5A	-	LBC807-16LT1	Si-pnp	AF-Drv, 50V, 500mA, 225mW, B=100..250, 100MHz	SOT-23	16ta	-	3a	Lrc
5A	-	PDTC123EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=2.2k/2.2k	SOT-416	16ta	-	3a	Nxp
5A	-	PDTC123JE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=2.2k/47k	SOT-416	16ta	-	3a	Nxp
5A	-	ST6205AS23	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-323	16cg	VR1	3b	Sta
5A	-	ST6205AS32	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-23	16cg	VR1	3b	Sta
5A	-	TMPD6050	Si-diode	Switching, 70V, 600mA, Vf<1.1V(10mA), Cd<2.5pF, <10ns	SOT-23	16dc	-	3a	All
5A-	-	MMBD4448PT	Si-diode	Sw, 80V, 250mA, Vf<1V(100mA), 4ns	SOT-23	16dc	-	3a	Chm
5A0	-	TC55RP502ECB	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
5A0	-	XC62FP5002M	LVR-IC	5.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
5A1	-	PZM5.1NB2A	Z-diode	Dual, 5.1V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
5A5	-	TC595002ECB	LVR-IC	LDO, -5.0V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
5A5	-	XC62KN502M	LVR-IC	LDO, -5.0V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
5A6	-	MMBZ5V6A	TVS	Dual, Vrwm=3.0V, Vbr=5.32..5.88V, 3.0A, 24W(1ms)	SOT-23	16dg	-	3a	Wtr
5A6	-	PZM5.6NB2A	Z-diode	Dual, 5.6V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
5AC2	-	81C50-P-AE3-2	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
5AC2G	-	81C50G-P-AE3-2	Vdet-IC	5.0V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
5AC2L	-	81C50L-P-AE3-2	Vdet-IC	5.0V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
5AC3	-	81C50-P-AE3-3	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
5AC3G	-	81C50G-P-AE3-3	Vdet-IC	5.0V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
5AC3L	-	81C50L-P-AE3-3	Vdet-IC	5.0V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
5AC5	-	81C50-P-AE3-5	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
5AC5G	-	81C50G-P-AE3-5	Vdet-IC	5.0V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
5AC5L	-	81C50L-P-AE3-5	Vdet-IC	5.0V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
5AN2	-	81N50-P-AE3-2	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
5AN2G	-	81N50G-P-AE3-2	Vdet-IC	5.0V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
5AN2L	-	81N50L-P-AE3-2	Vdet-IC	5.0V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
5AN3	-	81N50-P-AE3-3	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
5AN3G	-	81N50G-P-AE3-3	Vdet-IC	5.0V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
5AN3L	-	81N50L-P-AE3-3	Vdet-IC	5.0V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
5AN5	-	81N50-P-AE3-5	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
5AN5G	-	81N50G-P-AE3-5	Vdet-IC	5.0V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
5AN5L	-	81N50L-P-AE3-5	Vdet-IC	5.0V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
5Ap	-	BC807-16	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=100..250	SOT-23	16ta	-	3a	PhH
5Ap	-	BC807-16W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=100..250	SOT-323	16ta	-	3a	PhH
5As	-	BC807-16	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=100..250	SOT-23	16ta	-	3a	Sie
5As	-	BC807-16W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=100..250	SOT-323	16ta	-	3a	Sie
5At	-	BC807-16	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=100..250	SOT-23	16ta	-	3a	PhM
5At	-	BC807-16W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=100..250	SOT-323	16ta	-	3a	PhM
5AW	-	BC807-16	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=100..250	SOT-23	16ta	-	3a	PhC
5AW	-	BC807-16W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=100..250	SOT-323	16ta	-	3a	PhC
5AZ	-	BC807-16	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=100..250	SOT-23	16ta	-	3a	Zx
5B	-	2SC5938-B	Si-npn	AF, Sw, 50V, 200mA, 150mW, 30MHz, B=350..1200	SC-59	16ta	-	3a	Ish
5B	-	2SC5996-B	Si-npn	AF, Sw, 50V, 200mA, 150mW, 30MHz, B=350..1200	SOT-323	16ta	-	3a	Ish
5B	-	BC807-25	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=160..400	SOT-23	16ta	-	3a	PhH
5B	-	BC807-25W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=160..400	SOT-323	16ta	-	3a	PhH
5B	-	FMMD6100	C-diode	Dual, 70V, 200mA, Vf<1.1V, Cd<2.5pF, <5ns	SOT-23	16dg	-	3a	Zx
5B	-	KST4123	Si-npn	GP, 40V, 200mA, 350mW B=50..150, >250MHz	SOT-23	16ta	-	3a	Sam
5B	-	LBC807-25LT1	Si-pnp	AF-Drv, 50V, 500mA, 225mW, B=160..400, 100MHz	SOT-23	16ta	-	3a	Lrc
5B	-	MMBT4123	Si-npn	GP, 40V, 200mA, 350mW B=50..150, >250MHz	SOT-23	16ta	-	3a	Mot
5B	-	PDTA144TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1=47k	SOT-416	16ta	-	3a	Nxp
5B	-	R3131N25EC	Vdet-IC	2.5V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
5B	-	ST6205BS23	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-323	16cg	VR1	3b	Sta
5B	-	ST6205BS32	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-23	16cg	VR1	3b	Sta
5B	-	TMPD6100	Si-diode	GP, Dual, 70V, 500mA, Vf<1.1V(100mA), Cd<2.5pF, <5ns	SOT-23	16dg	-	3a	All
5B0	-	TC55RP512ECB	LVR-IC	LDO, 5.1V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
5B0	-	XC62FP5102M	LVR-IC	5.1V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
5B5	-	TC595102ECB	LVR-IC	LDO, -5.1V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
5B5	-	XC62KN512M	LVR-IC	LDO, -5.1V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
5BC2	-	81C51-P-AE3-2	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
5BC2G	-	81C51G-P-AE3-2	Vdet-IC	5.1V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
5BC2L	-	81C51L-P-AE3-2	Vdet-IC	5.1V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
5BC3	-	81C51-P-AE3-3	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
5BC3G	-	81C51G-P-AE3-3	Vdet-IC	5.1V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
5BC3L	-	81C51L-P-AE3-3	Vdet-IC	5.1V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
5BC5	-	81C51-P-AE3-5	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
5BC5G	-	81C51G-P-AE3-5	Vdet-IC	5.1V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
5BC5L	-	81C51L-P-AE3-5	Vdet-IC	5.1V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
5BM	-	MMBD6100	Si-diode	Dual, Sw, 70V, 200mA, Vf<1.1V(100mA), <2.5pF	SOT-23	16dg	-	3a	Ons
5BN2	-	81N51-P-AE3-2	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5BN2G	-	81N51G-P-AE3-2	Vdet-IC	5.1V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
5BN2L	-	81N51L-P-AE3-2	Vdet-IC	5.1V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
5BN3	-	81N51-P-AE3-3	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
5BN3G	-	81N51G-P-AE3-3	Vdet-IC	5.1V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
5BN3L	-	81N51L-P-AE3-3	Vdet-IC	5.1V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
5BN5	-	81N51-P-AE3-5	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
5BN5G	-	81N51G-P-AE3-5	Vdet-IC	5.1V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
5BN5L	-	81N51L-P-AE3-5	Vdet-IC	5.1V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
5Bp	-	BC807-25	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=160..400	SOT-23	16ta	-	3a	PhH
5Bp	-	BC807-25W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=160..400	SOT-323	16ta	-	3a	PhH
5Bs	-	BC807-25	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=160..400	SOT-23	16ta	-	3a	Sie
5Bs	-	BC807-25W	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=160..400	SOT-323	16ta	-	3a	Sie
5Bt	-	BC807-25	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=160..400	SOT-23	16ta	-	3a	PhM
5Bt	-	BC807-25W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=160..400	SOT-323	16ta	-	3a	PhM
5BW	-	BC807-25	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=160..400	SOT-23	16ta	-	3a	PhC
5BW	-	BC807-25W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=160..400	SOT-323	16ta	-	3a	PhC
5BZ	-	BC807-25	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=160..400	SOT-23	16ta	-	3a	Zx
5C	-	BC807-40	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=250..600	SOT-23	16ta	-	3a	PhH
5C	-	BC807-40W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=250..600	SOT-323	16ta	-	3a	PhH
5C	-	FMMD7000	C-diode	Dual, 70V, 200mA, Vf<1.1V, Cd<2.5pF, <15ns	SOT-23	16dl	-	3a	Zx
5C	-	LBC807-40LT1	Si-pnp	AF-Drv, 50V, 500mA, 225mW, B=250..600, 100MHz	SOT-23	16ta	-	3a	Lrc
5C	-	PDTA123EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=2.2k/2.2k	SOT-416	16ta	-	3a	Nxp
5C	-	R3131N35EC	Vdet-IC	3.5V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
5C	-	ST6205CS23	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-323	16cg	VR1	3b	Sta
5C	-	ST6205CS32	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-23	16cg	VR1	3b	Sta
5C	-	TMPD7000	Si-diode	GP, Dual, 70V, 500mA, Vf<1.1V(100mA), Cd<1.5pF, <15ns	SOT-23	16dj	-	3a	All
5C0	-	TC55RP522ECB	LVR-IC	LDO, 5.2V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
5C0	-	XC62FP5202M	LVR-IC	5.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
5C5	-	TC595202ECB	LVR-IC	LDO, -5.2V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
5C5	-	XC62KN522M	LVR-IC	LDO, -5.2V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
5CC2	-	81C52-P-AE3-2	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
5CC2G	-	81C52G-P-AE3-2	Vdet-IC	5.2V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
5CC2L	-	81C52L-P-AE3-2	Vdet-IC	5.2V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
5CC3	-	81C52-P-AE3-3	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
5CC3G	-	81C52G-P-AE3-3	Vdet-IC	5.2V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
5CC3L	-	81C52L-P-AE3-3	Vdet-IC	5.2V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
5CC5	-	81C52-P-AE3-5	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
5CC5G	-	81C52G-P-AE3-5	Vdet-IC	5.2V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
5CC5L	-	81C52L-P-AE3-5	Vdet-IC	5.2V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
5CN2	-	81N52-P-AE3-2	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
5CN2G	-	81N52G-P-AE3-2	Vdet-IC	5.2V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
5CN2L	-	81N52L-P-AE3-2	Vdet-IC	5.2V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
5CN3	-	81N52-P-AE3-3	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
5CN3G	-	81N52G-P-AE3-3	Vdet-IC	5.2V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
5CN3L	-	81N52L-P-AE3-3	Vdet-IC	5.2V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
5CN5	-	81N52-P-AE3-5	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
5CN5G	-	81N52G-P-AE3-5	Vdet-IC	5.2V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
5CN5L	-	81N52L-P-AE3-5	Vdet-IC	5.2V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
5Cp	-	BC807-40	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=250..600	SOT-23	16ta	-	3a	PhH
5Cp	-	BC807-40W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=250..600	SOT-323	16ta	-	3a	PhH
5Cs	-	BC807-40	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=250..600	SOT-23	16ta	-	3a	Sie
5Cs	-	BC807-40W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=250..600	SOT-323	16ta	-	3a	Sie
5Ct	-	BC807-40	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=250..600	SOT-23	16ta	-	3a	PhM
5Ct	-	BC807-40W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=250..600	SOT-323	16ta	-	3a	PhM
5CW	-	BC807-40	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=250..600	SOT-23	16ta	-	3a	PhC
5CW	-	BC807-40W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=250..600	SOT-323	16ta	-	3a	PhC
5CZ	-	BC807-40	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=250..600	SOT-23	16ta	-	3a	Zx
5D	-	BC807	Si-pnp	GP, 50V, 500mA, 250mW, B=100..600, 80MHz	SOT-23	16ta	-	3a	PhH
5D	-	BC807W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=100..600	SOT-323	16ta	-	3a	PhH
5D	-	FMMD914	Si-diode	Fast Sw, 75V, 225mA, Vf<1V, Cd<4.0pF, <8ns	SOT-23	16dc	-	3a	Zx
5D	-	FT533Dh	LVR-IC	LDO, 1.8V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
5D	-	HD2A	Si-diode	Dual, 35V, 100mA, Vf<1V, Cd<4pF, <6ns	SOT-23	16dg	-	3a	Zx
5D	-	MMBD914L	Si-diode	Sw, Fast, 100V, 200mA, 225mW, Vf<1V(10mA), <4ns	SOT-23	16dc	-	3a	Mot
5D	-	PDTA144WE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=47k/22k	SOT-416	16ta	-	3a	Nxp
5D	-	R3131N45EC	Vdet-IC	4.5V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
5D	-	ST6205DS23	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-323	16cg	VR1	3b	Sta
5D	-	ST6205DS32	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-23	16cg	VR1	3b	Sta
5D	-	TMPD4148	Si-diode	Switching, 100V, 600mA, Vf<1V(10mA), Cd<4pF, <4ns	SOT-23	16dc	-	3a	All
5D	-	TMPD914	Si-diode	GP, 100V, 600mA, Vf<1V(10mA), Cd<6pF, <4ns	SOT-23	16dc	-	3a	All
5D0	-	TC55RP532ECB	LVR-IC	LDO, 5.3V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5D0	-	XC62FP5302M	LVR-IC	5.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
5D5	-	TC595302ECB	LVR-IC	LDO, -5.3V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
5D5	-	XC62KN532M	LVR-IC	LDO, -5.3V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
5DC2	-	81C53-P-AE3-2	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
5DC2G	-	81C53G-P-AE3-2	Vdet-IC	5.3V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
5DC2L	-	81C53L-P-AE3-2	Vdet-IC	5.3V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
5DC3	-	81C53-P-AE3-3	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
5DC3G	-	81C53G-P-AE3-3	Vdet-IC	5.3V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
5DC3L	-	81C53L-P-AE3-3	Vdet-IC	5.3V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
5DC5	-	81C53-P-AE3-5	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
5DC5G	-	81C53G-P-AE3-5	Vdet-IC	5.3V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
5DC5L	-	81C53L-P-AE3-5	Vdet-IC	5.3V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
5Dg	-	FT533Dg	LVR-IC	LDO, 1.8V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
5DN2	-	81N53-P-AE3-2	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
5DN2G	-	81N53G-P-AE3-2	Vdet-IC	5.3V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
5DN2L	-	81N53L-P-AE3-2	Vdet-IC	5.3V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
5DN3	-	81N53-P-AE3-3	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
5DN3G	-	81N53G-P-AE3-3	Vdet-IC	5.3V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
5DN3L	-	81N53L-P-AE3-3	Vdet-IC	5.3V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
5DN5	-	81N53-P-AE3-5	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
5DN5G	-	81N53G-P-AE3-5	Vdet-IC	5.3V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
5DN5L	-	81N53L-P-AE3-5	Vdet-IC	5.3V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
5Dp	-	BC807	Si-pnp	GP, 50V, 500mA, 250mW, B=100..600, 80MHz	SOT-23	16ta	-	3a	PhH
5Dp	-	BC807W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=100..600	SOT-323	16ta	-	3a	PhH
5DR	-	BC807R	Si-pnp	AF-Drv, 50V, 500mA, 250mW, 80MHz, B=100..600	SOT-23	16te	-	3a	Zx
5Dt	-	BC807	Si-pnp	GP, 50V, 500mA, 250mW, B=100..600, 80MHz	SOT-23	16ta	-	3a	PhM
5Dt	-	BC807W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=100..600	SOT-323	16ta	-	3a	PhM
5DW	-	BC807	Si-pnp	GP, 50V, 500mA, 250mW, B=100..600, 80MHz	SOT-23	16ta	-	3a	PhC
5DW	-	BC807W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=100..600	SOT-323	16ta	-	3a	PhC
5DZ	-	BC807	Si-pnp	GP, 50V, 500mA, 330mW, B=100..600, 100MHz	SOT-23	16ta	-	3a	Zx
5E	-	BC808-16	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=100..250, >100MHz	SOT-23	16ta	-	3a	Itt
5E	-	FMMTA43R	Si-npn	Vid, 200V, 200mA, 330mW, B=50..200, >50MHz	SOT-23	16te	-	3a	Zx
5E	-	FT533Eh	LVR-IC	LDO, 2.5V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
5E	-	PDTA115EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=100k/100k	SOT-416	16ta	-	3a	Nxp
5E0	-	TC55RP542ECB	LVR-IC	LDO, 5.4V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
5E0	-	XC62FP5402M	LVR-IC	5.4V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
5E2	-	UM810AS	Vdet-IC	5.0V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5E3	-	UM810BS	Vdet-IC	4.9V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5E4	-	UM810CS	Vdet-IC	4.8V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5E5	-	TC595402ECB	LVR-IC	LDO, -5.4V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
5E5	-	UM810DS	Vdet-IC	4.7V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5E5	-	XC62KN542M	LVR-IC	LDO, -5.4V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
5E7	-	UM810ES	Vdet-IC	4.5V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5E9	-	UM810FS	Vdet-IC	4.3V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5EA	-	UM810GS	Vdet-IC	4.2V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5EB	-	UM810HS	Vdet-IC	4.1V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5EC2	-	81C54-P-AE3-2	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
5EC2G	-	81C54G-P-AE3-2	Vdet-IC	5.4V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
5EC2L	-	81C54L-P-AE3-2	Vdet-IC	5.4V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
5EC3	-	81C54-P-AE3-3	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
5EC3G	-	81C54G-P-AE3-3	Vdet-IC	5.4V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
5EC3L	-	81C54L-P-AE3-3	Vdet-IC	5.4V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
5EC5	-	81C54-P-AE3-5	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
5EC5G	-	81C54G-P-AE3-5	Vdet-IC	5.4V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
5EC5L	-	81C54L-P-AE3-5	Vdet-IC	5.4V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
5ED	-	UM810IS	Vdet-IC	3.9V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5EE	-	UM810KS	Vdet-IC	3.8V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5EF	-	UM810NS	Vdet-IC	3.7V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5Eg	-	FT533Eg	LVR-IC	LDO, 2.5V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
5EH	-	UM810OS	Vdet-IC	3.6V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5EJ	-	UM810US	Vdet-IC	3.3V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5EK	-	UM810VS	Vdet-IC	3.2V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5EL	-	UM810PS	Vdet-IC	3.5V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5EM	-	UM810QS	Vdet-IC	3.4V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5EN2	-	81N54-P-AE3-2	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
5EN2G	-	81N54G-P-AE3-2	Vdet-IC	5.4V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
5EN2L	-	81N54L-P-AE3-2	Vdet-IC	5.4V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
5EN3	-	81N54-P-AE3-3	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
5EN3G	-	81N54G-P-AE3-3	Vdet-IC	5.4V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
5EN3L	-	81N54L-P-AE3-3	Vdet-IC	5.4V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5EN5	-	81N54-P-AE3-5	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
5EN5G	-	81N54G-P-AE3-5	Vdet-IC	5.4V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
5EN5L	-	81N54L-P-AE3-5	Vdet-IC	5.4V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
5Ep	-	BC808-16	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=100..250, >100MHz	SOT-23	16ta	-	3a	PhH
5EP	-	UM810WS	Vdet-IC	3.0V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5ER	-	UM810XS	Vdet-IC	2.8V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5Es	-	BC808-16	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=100..250, >100MHz	SOT-23	16ta	-	3a	Sie
5Es	-	BC808-16W	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=100..250, >100MHz	SOT-323	16ta	-	3a	Sie
5ES	-	UM810YS	Vdet-IC	2.7V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5Et	-	BC808-16W	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=100..250, >100MHz	SOT-323	16ta	-	3a	PhM
5EU	-	UM810ABS	Vdet-IC	2.4V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5EW	-	BC808-16	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=100..250, >100MHz	SOT-23	16ta	-	3a	PhC
5EY	-	UM810AAS	Vdet-IC	2.5V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5EZ	-	BC808-16	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=100..250, >100MHz	SOT-23	16ta	-	3a	Zx
5F	-	2SK3539	n-MOSFET	Sw, 50V, 100mA, 150mW, 8Ω(10mA), 200/200ns	SOT-323	16fh	-	3a	Pan
5F	-	2SK4072	n-MOSFET	Sw, 25V, 100mA, 200mW, 6Ω(10mA), 200/200ns	S-Mini3-G1	16fh	-	3a	Pan
5F	-	BC808-25	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=160..400, >100MHz	SOT-23	16ta	-	3a	Itt
5F	-	FT533Fh	LVR-IC	LDO, 2.7V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
5F	-	TMPD6919	Si-diode	Schottky, 50V, 500mA, Vf<0.45V(1mA), Cd<1pF	SOT-23	16dc	-	3a	All
5F0	-	TC55RP552ECB	LVR-IC	LDO, 5.5V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
5F0	-	XC62FP5502M	LVR-IC	5.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
5F5	-	TC595502ECB	LVR-IC	LDO, -5.5V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
5F5	-	UM810ACS	Vdet-IC	2.2V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5F5	-	XC62KN552M	LVR-IC	LDO, -5.5V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
5F6	-	UM810ADS	Vdet-IC	2.1V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5F7	-	UM810AES	Vdet-IC	2.0V±1%, +Reset PPO	SOT-23	16vdc	VD7	3c	Uns
5FC2	-	81C55-P-AE3-2	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
5FC2G	-	81C55G-P-AE3-2	Vdet-IC	5.5V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
5FC2L	-	81C55L-P-AE3-2	Vdet-IC	5.5V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
5FC3	-	81C55-P-AE3-3	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
5FC3G	-	81C55G-P-AE3-3	Vdet-IC	5.5V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
5FC3L	-	81C55L-P-AE3-3	Vdet-IC	5.5V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
5FC5	-	81C55-P-AE3-5	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
5FC5G	-	81C55G-P-AE3-5	Vdet-IC	5.5V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
5FC5L	-	81C55L-P-AE3-5	Vdet-IC	5.5V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
5Fg	-	FT533Fg	LVR-IC	LDO, 2.7V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
5FN2	-	81N55-P-AE3-2	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
5FN2G	-	81N55G-P-AE3-2	Vdet-IC	5.5V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
5FN2L	-	81N55L-P-AE3-2	Vdet-IC	5.5V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
5FN3	-	81N55-P-AE3-3	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
5FN3G	-	81N55G-P-AE3-3	Vdet-IC	5.5V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
5FN3L	-	81N55L-P-AE3-3	Vdet-IC	5.5V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
5FN5	-	81N55-P-AE3-5	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
5FN5G	-	81N55G-P-AE3-5	Vdet-IC	5.5V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
5FN5L	-	81N55L-P-AE3-5	Vdet-IC	5.5V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
5Fp	-	BC808-25	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=160..400, >100MHz	SOT-23	16ta	-	3a	PhH
5Fs	-	BC808-25	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=160..400, >100MHz	SOT-23	16ta	-	3a	Sie
5Fs	-	BC808-25W	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=160..400, >100MHz	SOT-323	16ta	-	3a	Sie
5Ft	-	BC808-25W	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=160..400, >100MHz	SOT-323	16ta	-	3a	Phi
5FW	-	BC808-25	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=160..400, >100MHz	SOT-23	16ta	-	3a	PhC
5FZ	-	BC808-25	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=160..400, >100MHz	SOT-23	16ta	-	3a	Zx
5G	-	BC808-40	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=250..630, >100MHz	SOT-23	16ta	-	3a	Itt
5G	-	FT533Gh	LVR-IC	LDO, 2.8V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
5G	-	R3131N25EA	Vdet-IC	2.5V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
5GC2	-	81C56-P-AE3-2	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
5GC2G	-	81C56G-P-AE3-2	Vdet-IC	5.6V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
5GC2L	-	81C56L-P-AE3-2	Vdet-IC	5.6V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
5GC3	-	81C56-P-AE3-3	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
5GC3G	-	81C56G-P-AE3-3	Vdet-IC	5.6V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
5GC3L	-	81C56L-P-AE3-3	Vdet-IC	5.6V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
5GC5	-	81C56-P-AE3-5	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
5GC5G	-	81C56G-P-AE3-5	Vdet-IC	5.6V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
5GC5L	-	81C56L-P-AE3-5	Vdet-IC	5.6V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
5Gg	-	FT533Gg	LVR-IC	LDO, 2.8V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
5GN2	-	81N56-P-AE3-2	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
5GN2G	-	81N56G-P-AE3-2	Vdet-IC	5.6V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
5GN2L	-	81N56L-P-AE3-2	Vdet-IC	5.6V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
5GN3	-	81N56-P-AE3-3	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
5GN3G	-	81N56G-P-AE3-3	Vdet-IC	5.6V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
5GN3L	-	81N56L-P-AE3-3	Vdet-IC	5.6V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5GN5	-	81N56-P-AE3-5	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
5GN5G	-	81N56G-P-AE3-5	Vdet-IC	5.6V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
5GN5L	-	81N56L-P-AE3-5	Vdet-IC	5.6V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
5Gp	-	BC808-40	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=250..630, >100MHz	SOT-23	16ta	-	3a	PhH
5Gs	-	BC808-40	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=250..630, >100MHz	SOT-23	16ta	-	3a	Sie
5Gs	-	BC808-40W	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=250..630, >100MHz	SOT-323	16ta	-	3a	Sie
5Gt	-	BC808-40W	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=250..630, >100MHz	SOT-323	16ta	-	3a	Phi
5GW	-	BC808-40	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=250..630, >100MHz	SOT-23	16ta	-	3a	PhC
5GZ	-	BC808-40	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=250..630, >100MHz	SOT-23	16ta	-	3a	Zx
5H	-	BC808	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=100..600, >100MHz	SOT-23	16ta	-	3a	Cdi
5H	-	FT533Hh	LVR-IC	LDO, 2.85V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
5H	-	MMBD4148	Si-diode	Sw, Fast, 75V, 200mA, 350mW, <4ns, 4pF	SOT-23	16dc	-	3a	F
5H	-	MMBD701	Si-diode	Schottky, UHF/VHF-Det, 70V, 10mA, Vf<1V(10mA), <1pF	SOT-23	16dc	-	3a	Ons
5H	-	MMBD770	Si-diode	Schottky, UHF/VHF-Det, 30V, 10mA, Vf<1V(10mA), <1pF	SOT-323	16dc	-	3a	Ons
5H	-	R3131N35EA	Vdet-IC	3.5V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
5H-	-	BD4148PT	Si-diode	Sw, 75V, 250mA, Vf<1V(10mA), 4ns	SOT-23	16dc	-	3a	Chm
5H0	-	TC55RP562ECB	LVR-IC	LDO, 5.6V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
5H0	-	XC62FP5602M	LVR-IC	5.6V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
5H5	-	TC595602ECB	LVR-IC	LDO, -5.6V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
5H5	-	XC62KN562M	LVR-IC	LDO, -5.6V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
5HC2	-	81C57-P-AE3-2	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
5HC2G	-	81C57G-P-AE3-2	Vdet-IC	5.7V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
5HC2L	-	81C57L-P-AE3-2	Vdet-IC	5.7V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
5HC3	-	81C57-P-AE3-3	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
5HC3G	-	81C57G-P-AE3-3	Vdet-IC	5.7V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
5HC3L	-	81C57L-P-AE3-3	Vdet-IC	5.7V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
5HC5	-	81C57-P-AE3-5	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
5HC5G	-	81C57G-P-AE3-5	Vdet-IC	5.7V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
5HC5L	-	81C57L-P-AE3-5	Vdet-IC	5.7V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
5Hg	-	FT533Hg	LVR-IC	LDO, 2.85V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
5HN2	-	81N57-P-AE3-2	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
5HN2G	-	81N57G-P-AE3-2	Vdet-IC	5.7V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
5HN2L	-	81N57L-P-AE3-2	Vdet-IC	5.7V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
5HN3	-	81N57-P-AE3-3	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
5HN3G	-	81N57G-P-AE3-3	Vdet-IC	5.7V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
5HN3L	-	81N57L-P-AE3-3	Vdet-IC	5.7V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
5HN5	-	81N57-P-AE3-5	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
5HN5G	-	81N57G-P-AE3-5	Vdet-IC	5.7V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
5HN5L	-	81N57L-P-AE3-5	Vdet-IC	5.7V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
5Hp	-	BC808	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=100..600, >100MHz	SOT-23	16ta	-	3a	PhH
5Ht	-	BC808W	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=250..630, >80MHz	SOT-23	16ta	-	3a	Phi
5HW	-	BC808	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=100..600, >100MHz	SOT-23	16ta	-	3a	PhC
5HZ	-	BC808	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=100..600, >100MHz	SOT-23	16ta	-	3a	Zx
5I	-	FT533Ih	LVR-IC	LDO, 3.0V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
5I-	-	BD4148APT	Si-diode	Dual, Sw, 75V, 150mA, Vf<1V(10mA), 4ns	SOT-23	16df	-	3a	Chm
5Ig	-	FT533Ig	LVR-IC	LDO, 3.0V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
5J	-	FMMT38B	Si-npn-Darl	GP, 50V, 300mA, 330mW, B>2000	SOT-23	16ta	-	3a	Zx
5J	-	FT533Jh	LVR-IC	LDO, 3.3V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
5J	-	R3131N45EA	Vdet-IC	4.5V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
5J-	-	BD4148CPT	Si-diode	Dual, Sw, 75V, 150mA, Vf<1V(10mA), 4ns	SOT-23	16dg	-	3a	Chm
5JC2	-	81C58-P-AE3-2	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
5JC2G	-	81C58G-P-AE3-2	Vdet-IC	5.8V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
5JC2L	-	81C58L-P-AE3-2	Vdet-IC	5.8V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
5JC3	-	81C58-P-AE3-3	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
5JC3G	-	81C58G-P-AE3-3	Vdet-IC	5.8V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
5JC3L	-	81C58L-P-AE3-3	Vdet-IC	5.8V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
5JC5	-	81C58-P-AE3-5	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
5JC5G	-	81C58G-P-AE3-5	Vdet-IC	5.8V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
5JC5L	-	81C58L-P-AE3-5	Vdet-IC	5.8V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
5Jg	-	FT533Jg	LVR-IC	LDO, 3.3V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
5JN2	-	81N58-P-AE3-2	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
5JN2G	-	81N58G-P-AE3-2	Vdet-IC	5.8V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
5JN2L	-	81N58L-P-AE3-2	Vdet-IC	5.8V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
5JN3	-	81N58-P-AE3-3	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
5JN3G	-	81N58G-P-AE3-3	Vdet-IC	5.8V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
5JN3L	-	81N58L-P-AE3-3	Vdet-IC	5.8V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
5JN5	-	81N58-P-AE3-5	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
5JN5G	-	81N58G-P-AE3-5	Vdet-IC	5.8V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
5JN5L	-	81N58L-P-AE3-5	Vdet-IC	5.8V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
5K	-	FT533Kh	LVR-IC	LDO, 3.6V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5K	-	MMBV809	C-diode	UHF-Tuning, 20V, 225mW, 4.5/6.1pF(2V, 1MHz)	SOT-23	16dc	-	3a	Ons
5K-	-	BD4148SPT	Si-diode	Dual, Sw, 75V, 150mA, Vf<1V(10mA), 4ns	SOT-23	16dl	-	3a	Chm
5K0	-	TC55RP572ECB	LVR-IC	LDO, 5.7V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
5K0	-	XC62FP5702M	LVR-IC	5.7V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
5K5	-	TC595702ECB	LVR-IC	LDO, -5.7V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
5K5	-	XC62KN572M	LVR-IC	LDO, -5.7V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
5KC2	-	81C59-P-AE3-2	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
5KC2G	-	81C59G-P-AE3-2	Vdet-IC	5.9V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
5KC2L	-	81C59L-P-AE3-2	Vdet-IC	5.9V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
5KC3	-	81C59-P-AE3-3	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
5KC3G	-	81C59G-P-AE3-3	Vdet-IC	5.9V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
5KC3L	-	81C59L-P-AE3-3	Vdet-IC	5.9V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
5KC5	-	81C59-P-AE3-5	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
5KC5G	-	81C59G-P-AE3-5	Vdet-IC	5.9V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
5KC5L	-	81C59L-P-AE3-5	Vdet-IC	5.9V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
5Kg	-	FT533Kg	LVR-IC	LDO, 3.6V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
5KN2	-	81N59-P-AE3-2	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
5KN2G	-	81N59G-P-AE3-2	Vdet-IC	5.9V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
5KN2L	-	81N59L-P-AE3-2	Vdet-IC	5.9V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
5KN3	-	81N59-P-AE3-3	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
5KN3G	-	81N59G-P-AE3-3	Vdet-IC	5.9V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
5KN3L	-	81N59L-P-AE3-3	Vdet-IC	5.9V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
5KN5	-	81N59-P-AE3-5	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
5KN5G	-	81N59G-P-AE3-5	Vdet-IC	5.9V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
5KN5L	-	81N59L-P-AE3-5	Vdet-IC	5.9V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
5Kp	-	BAP64-05	PIN-diode	Dual, RF, 175V, 100mA, 250mW, 0.35pF, 3.8Ω(10mA/100MHz)	SOT-23	16dg	-	3a	Phi
5L	-	MMBV609	C-diode	Dual, FM-Tuning, 20V, 26/32pF(3V)	SOT-23	16dg	-	3a	Mot
5L	-	R3131N46AC5	Vdet-IC	4.6V±1.5%, +Reset ODO, 50ms	SOT-23	16vdc	VD6	3b	Ric
5L0	-	TC55RP582ECB	LVR-IC	LDO, 5.8V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
5L0	-	XC62FP5802M	LVR-IC	5.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
5L5	-	TC595802ECB	LVR-IC	LDO, -5.8V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
5L5	-	XC62KN582M	LVR-IC	LDO, -5.8V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
5M	-	2SJ0672	p-MOSFET	Sw, 30V, 100mA, 100mW, 15Ω(10mA)	SSSMini3-F1	18fh	-	3a	Pan
5M	-	CESD5V0AP	ESDP-diode	Dual, Vbr=6.2..7.3V, Vrwm=5V, Ipp=12A, 300W(1ms)	SOT-23	16df	-	3a	Jce
5M	-	R3131N46BC5	Vdet-IC	4.6V±1.5%, +Reset ODO, 100ms	SOT-23	16vdc	VD6	3b	Ric
5M0	-	TC55RP592ECB	LVR-IC	LDO, 5.9V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
5M0	-	XC62FP5902M	LVR-IC	5.9V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
5M5	-	TC595902ECB	LVR-IC	LDO, -5.9V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
5M5	-	XC62KN592M	LVR-IC	LDO, -5.9V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
5N	-	IMBT3906	Si-pnp	GP, 40V, 200mA, 250mW, B=60..300, >250MHz	SOT-23	16ta	-	3a	Itt
5N	-	MMBD452	Si-diode	Dual, UHF/VHF-Det, 30V, 10mA, Vf<0.6V(10mA), <1.5pF	SOT-23	16dl	-	3a	Ons
5N	-	R3131N46DC5	Vdet-IC	4.6V±1.5%, +Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Ric
5N	-	YTS4126	Si-pnp	GP, 25V, 200mA, 350mW, B=120..360, >250MHz	SOT-23	16ta	-	3a	Tos
5P	-	FMMT2907AR	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16te	-	3a	Zx
5P	-	R3131N46HC5	Vdet-IC	4.6V±1.5%, +Reset ODO, 400ms	SOT-23	16vdc	VD6	3b	Ric
5PMS	-	S5PMS	Si-diode	Rectifier, 1000V, 5A, Vf<1V(5A)	TO-277A	76dh	-	3o	Vs
5Q	-	DDZX39F	Z-diode	39V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
5Q	-	R3131N46AA5	Vdet-IC	4.6V±1.5%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3b	Ric
5R	-	R3131N46BA5	Vdet-IC	4.6V±1.5%, +Reset PPO, 100ms	SOT-23	16vdc	VD7	3b	Ric
5R	-	SRA2205E	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=22k/47k	SOT-523	16ta	-	3a	Auk
5R	-	SRA2205EF	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=22k/47k	SOT-523F	18ta	-	3a	Auk
5R	-	SRA2205U	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/47k	SOT-323	16ta	-	3a	Auk
5R	-	SRA2205UF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/47k	SOT-323F	18ta	-	3a	Auk
5S	-	R3131N46DA5	Vdet-IC	4.6V±1.5%, +Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Ric
5T	-	BCW66GR	Si-npn	AF, 75V, 800mA, 330mW, B=160..400, >100MHz	SOT-23	16te	-	3a	Zx
5T	-	BCW68GR	Si-pnp	AF, Sw, 60V, 800mA, 330mW, B=160..400, >100MHz	SOT-23	16ta	-	3a	Zx
5T	-	MSG33002	SiGe-npn	RF, LN, 9V, 60mA, 100mW, 19GHz, B=100..200	SSSMini3	18ta	-	3a	Pan
5T	-	R3131N46HA5	Vdet-IC	4.6V±1.5%, +Reset PPO, 400ms	SOT-23	16vdc	VD7	3b	Ric
5V	-	BCW65BR	Si-npn	AF, 60V, 800mA, 330mW, B=160..400, >100MHz	SOT-23	16te	-	3a	Zx
5V1	-	CHPZ5V1PT	Z-diode	Dual, 4.8..5.4V, Izt=5mA, Zzt=60Ω, 350mW	SOT-23	16df	-	3a	Chm
5V1	-	PZM5.1NB	Z-diode	5.1V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
5V6	-	CHPZ5V6PT	Z-diode	Dual, 5.2..6.0V, Izt=5mA, Zzt=40Ω, 350mW	SOT-23	16df	-	3a	Chm
5V6	-	PZM5.6NB	Z-diode	5.6V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
5W	-	BCW67BR	Si-pnp	AF, Sw, 45V, 800mA, 330mW, B=160..400, >100MHz	SOT-23	16ta	-	3a	Zx
5W-	-	BAP64-05W	PIN-diode	Dual, RF, 100V, 100mA, 250mW, 0.35pF, 3.8Ω(10mA/100MHz)	SOT-323	16dg	-	3a	Phi
5Z	-	2SK4029	n-MOSFET	Sw, 25V, 1A, 500mW, 0.26Ω(500mA), 8/30ns	S-Mini3-G1	16fh	-	3a	Pan
5Z1	-	CZ1W5V1	Z-diode	5.1V±5%, Izt=49mA, 600mW	SOT-23	16dc	-	3a	Cdi
5Z6	-	CZ1W5V6	Z-diode	5.6V±5%, Izt=45mA, 600mW	SOT-23	16dc	-	3a	Cdi
6	cr	ELM7543NEB	Vdet-IC	4.3V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
6	cs	ELM7543CEB	Vdet-IC	4.3V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6.0G	-	ZD6.0G-AE3	Z-diode	6.0V±5%, Zzt=60Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
6.0L	-	ZD6.0L-AE3	Z-diode	6.0V±5%, Zzt=60Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
6.2	-	TZT6.2W	Z-diode	5.80..6.60V, Izt=5mA, Zzt=30Ω, 200mW	SOT-23	16dc	-	3a	Ttr
6.2	-	Z02W6.2V	Z-diode	5.80..6.60V, Izt=5mA, Zzt=30Ω, 200mW	SOT-23	16dc	-	3f	Kec
6.2A	-	MAZ3062WA	Z-diode	Dual, 6.2V, If=100mA, Zzt=20Ω, 200mW	SC-59	16df	-	3a	Pan
6.2C	-	MAZC062D	SAZ-diode	Dual, 6.2V, Zzt=30Ω(5mA), 200mW	SC-59	16df	-	3a	Pan
6.2C	-	MAZE062D	SAZ-diode	Dual, 6.2V, 5mA, 150mW	SMini3-F1	18df	-	3a	Pan
6.2G	-	ZD6.2G-AE3	Z-diode	6.2V±5%, Zzt=60Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
6.2H	-	BZX84C6V2-V	Z-diode	6.0..6.39V, Izt=5mA, Zzt=30Ω, 300mW	SOT-23	16dc	-	3f	Kec
6.2H	-	MAZ3062-H	Z-diode	5.8..6.6V, If=100mA, Zzt=20Ω, 200mW	SC-59	16dc	-	3a	Pan
6.2L	-	MAZ3062-L	Z-diode	5.8..6.6V, If=100mA, Zzt=20Ω, 200mW	SC-59	16dc	-	3a	Pan
6.2L	-	ZD6.2L-AE3	Z-diode	6.2V±5%, Zzt=60Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
6.2M	-	MAZ3062-M	Z-diode	5.8..6.6V, If=100mA, Zzt=20Ω, 200mW	SC-59	16dc	-	3a	Pan
6.2X	-	TZT6.2XW	Z-diode	5.80..6.20V, Izt=5mA, Zzt=30Ω, 200mW	SOT-23	16dc	-	3a	Ttr
6.2X	-	Z02W6.2VX	Z-diode	5.80..6.20V, Izt=5mA, Zzt=30Ω, 200mW	SOT-23	16dc	-	3f	Kec
6.2Y	-	TZT6.2YW	Z-diode	6.0..6.39V, Izt=5mA, Zzt=30Ω, 200mW	SOT-23	16dc	-	3a	Ttr
6.2Y	-	Z02W6.2VY	Z-diode	6.0..6.39V, Izt=5mA, Zzt=30Ω, 200mW	SOT-23	16dc	-	3f	Kec
6.2Z	-	MAZ9062H	SAZ-diode	Dual, 6.2V, Zzt=50Ω(5mA), 200mW	SC-59	16df	-	3a	Pan
6.2Z	-	MAZT062H	SAZ-diode	Dual, 6.2V, 5mA, 150mW	SC-89	18df	-	3a	Pan
6.2Z	-	TZT6.2ZW	Z-diode	6.19..6.60V, Izt=5mA, Zzt=30Ω, 200mW	SOT-23	16dc	-	3a	Ttr
6.2Z	-	Z02W6.2VZ	Z-diode	6.19..6.60V, Izt=5mA, Zzt=30Ω, 200mW	SOT-23	16dc	-	3f	Kec
6.8	-	TZT6.8W	Z-diode	6.40..7.20V, Izt=5mA, Zzt=25Ω, 200mW	SOT-23	16dc	-	3a	Ttr
6.8	-	Z02W6.8V	Z-diode	6.40..7.20V, Izt=5mA, Zzt=25Ω, 200mW	SOT-23	16dc	-	3f	Kec
6.8G	-	ZD6.8G-AE3	Z-diode	6.8V±5%, Zzt=40Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
6.8H	-	BZX84C6V8-V	Z-diode	6.60..7.02V, Izt=5mA, Zzt=25Ω, 300mW	SOT-23	16dc	-	3f	Kec
6.8H	-	MAZ3068-H	Z-diode	6.4..7.2V, If=100mA, Zzt=15Ω, 200mW	SC-59	16dc	-	3a	Pan
6.8L	-	MAZ3068-L	Z-diode	6.4..7.2V, If=100mA, Zzt=15Ω, 200mW	SC-59	16dc	-	3a	Pan
6.8L	-	ZD6.8L-AE3	Z-diode	6.8V±5%, Zzt=40Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
6.8M	-	MAZ3068-M	Z-diode	6.4..7.2V, If=100mA, Zzt=15Ω, 200mW	SC-59	16dc	-	3a	Pan
6.8X	-	TZT6.8XW	Z-diode	6.40..6.80V, Izt=5mA, Zzt=25Ω, 200mW	SOT-23	16dc	-	3a	Ttr
6.8X	-	Z02W6.8VX	Z-diode	6.40..6.80V, Izt=5mA, Zzt=25Ω, 200mW	SOT-23	16dc	-	3f	Kec
6.8Y	-	TZT6.8YW	Z-diode	6.60..7.02V, Izt=5mA, Zzt=25Ω, 200mW	SOT-23	16dc	-	3a	Ttr
6.8Y	-	Z02W6.8VY	Z-diode	6.60..7.02V, Izt=5mA, Zzt=25Ω, 200mW	SOT-23	16dc	-	3f	Kec
6.8Z	-	MAZ9068H	SAZ-diode	Dual, 6.8V, Zzt=30Ω(5mA), 200mW	SC-59	16df	-	3a	Pan
6.8Z	-	MAZT068H	SAZ-diode	Dual, 6.8V, 5mA, 150mW	SC-89	18df	-	3a	Pan
6.8Z	-	TZT6.8ZW	Z-diode	6.82..7.20V, Izt=5mA, Zzt=25Ω, 200mW	SOT-23	16dc	-	3a	Ttr
6.8Z	-	Z02W6.8VZ	Z-diode	6.82..7.20V, Izt=5mA, Zzt=25Ω, 200mW	SOT-23	16dc	-	3f	Kec
6•2X	-	02CZ6.2-X	Z-diode	5.8..6.2V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
6•2Y	-	02CZ6.2-Y	Z-diode	6..6.39V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
6•2Z	-	02CZ6.2-Z	Z-diode	6.19..6.6V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
6•8X	-	02CZ6.8-X	Z-diode	6.4..6.8V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
6•8Y	-	02CZ6.8-Y	Z-diode	6.6..7.02V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
6•8Z	-	02CZ6.8-Z	Z-diode	6.82..7.20V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
60	-	AP8822N-30GA	Vdet-IC	3.0V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
60	-	AP8822N-30GT	Vdet-IC	3.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
60	-	AP8822N-30PA	Vdet-IC	3.0V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
60	-	AP8822N-30PT	Vdet-IC	3.0V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
60	-	CHDTC143XMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/10k	SOT-723	18ta	-	3a	Chm
60	-	ELM9860BB	LVR-IC	6.0V±2%, 200mA	SOT-23	16cg	VR1	3d	Elm
600AC	-	BL8509-600ACRM	Vdet-IC	6.0V±2%, -Reset PPO, Td=50ms	SOT-23	16vdc	VD7	3a	Shb
600AC	-	LC9009CB3TR600AC	Vdet-IC	6.0V±2%, -Reset PPO, Rtd=50ms	SOT-23	16vdc	VD7	3a	Lch
600AN	-	BL8509-600ANRM	Vdet-IC	6.0V±2%, -Reset ODO, Td=50ms	SOT-23	16vdc	VD6	3a	Shb
600AN	-	LC9009CB3TR600AN	Vdet-IC	6.0V±2%, -Reset ODO, Rtd=50ms	SOT-23	16vdc	VD6	3a	Lch
600BC	-	BL8509-600BCRM	Vdet-IC	6.0V±2%, -Reset PPO, Td=100ms	SOT-23	16vdc	VD7	3a	Shb
600BC	-	LC9009CB3TR600BC	Vdet-IC	6.0V±2%, -Reset PPO, Rtd=100ms	SOT-23	16vdc	VD7	3a	Lch
600BN	-	BL8509-600BNRM	Vdet-IC	6.0V±2%, -Reset ODO, Td=100ms	SOT-23	16vdc	VD6	3a	Shb
600BN	-	LC9009CB3TR600BN	Vdet-IC	6.0V±2%, -Reset ODO, Rtd=100ms	SOT-23	16vdc	VD6	3a	Lch
600CC	-	BL8509-600CCRM	Vdet-IC	6.0V±2%, -Reset PPO, Td=150ms	SOT-23	16vdc	VD7	3a	Shb
600CC	-	LC9009CB3TR600CC	Vdet-IC	6.0V±2%, -Reset PPO, Rtd=150ms	SOT-23	16vdc	VD7	3a	Lch
600CN	-	BL8509-600CNRM	Vdet-IC	6.0V±2%, -Reset ODO, Td=150ms	SOT-23	16vdc	VD6	3a	Shb
600CN	-	LC9009CB3TR600CN	Vdet-IC	6.0V±2%, -Reset ODO, Rtd=150ms	SOT-23	16vdc	VD6	3a	Lch
600DC	-	BL8509-600DCRM	Vdet-IC	6.0V±2%, -Reset PPO, Td=200ms	SOT-23	16vdc	VD7	3a	Shb
600DC	-	LC9009CB3TR600DC	Vdet-IC	6.0V±2%, -Reset PPO, Rtd=200ms	SOT-23	16vdc	VD7	3a	Lch
600DN	-	BL8509-600DNRM	Vdet-IC	6.0V±2%, -Reset ODO, Td=200ms	SOT-23	16vdc	VD6	3a	Shb
600DN	-	LC9009CB3TR600DN	Vdet-IC	6.0V±2%, -Reset ODO, Rtd=200ms	SOT-23	16vdc	VD6	3a	Lch
600EC	-	BL8509-600ECRM	Vdet-IC	6.0V±2%, -Reset PPO, Td=250ms	SOT-23	16vdc	VD7	3a	Shb
600EC	-	LC9009CB3TR600EC	Vdet-IC	6.0V±2%, -Reset PPO, Rtd=250ms	SOT-23	16vdc	VD7	3a	Lch
600EN	-	BL8509-600ENRM	Vdet-IC	6.0V±2%, -Reset ODO, Td=250ms	SOT-23	16vdc	VD6	3a	Shb
600EN	-	LC9009CB3TR600EN	Vdet-IC	6.0V±2%, -Reset ODO, Rtd=250ms	SOT-23	16vdc	VD6	3a	Lch
600FC	-	BL8509-600FCRM	Vdet-IC	6.0V±2%, -Reset PPO, Td=300ms	SOT-23	16vdc	VD7	3a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
600FC	-	LC9009CB3TR600FC	Vdet-IC	6.0V±2%, -Reset PPO, Rtd=300ms	SOT-23	16vdc	VD7	3a	Lch
600FN	-	BL8509-600FNRM	Vdet-IC	6.0V±2%, -Reset ODO, Td=300ms	SOT-23	16vdc	VD6	3a	Shb
600FN	-	LC9009CB3TR600FN	Vdet-IC	6.0V±2%, -Reset ODO, Rtd=300ms	SOT-23	16vdc	VD6	3a	Lch
600GC	-	BL8509-600GCRM	Vdet-IC	6.0V±2%, -Reset PPO, Td=400ms	SOT-23	16vdc	VD7	3a	Shb
600GC	-	LC9009CB3TR600GC	Vdet-IC	6.0V±2%, -Reset PPO, Rtd=400ms	SOT-23	16vdc	VD7	3a	Lch
600GN	-	BL8509-600GNRM	Vdet-IC	6.0V±2%, -Reset ODO, Td=400ms	SOT-23	16vdc	VD6	3a	Shb
600GN	-	LC9009CB3TR600GN	Vdet-IC	6.0V±2%, -Reset ODO, Rtd=400ms	SOT-23	16vdc	VD6	3a	Lch
605	-	NDS0605	p-MOSFET	V-MOS, 60V, 0.18A, <5Ω(0.5A)	SOT-23	16fh	-	3a	Nsc
60B	-	MMBZ5260BPT	Z-diode	40.85..45.15V, Izt=3.0mA, Zzt=93Ω, 225mW	SOT-23	16dc	-	3a	Chm
60S	-	MMBZ5260SPT	Z-diode	42.14..43.86V, Izt=3.0mA, Zzt=93Ω, 225mW	SOT-23	16dc	-	3a	Chm
60S	-	MMCZ5260SPT	Z-diode	42.14..43.86V, Izt=3.0mA, Zzt=93Ω, 225mW	SOT-346	16dc	-	3a	Chm
60T	-	TK71560AS	LVR-IC	LDO, 6.0V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
61	-	AP8822N-31GA	Vdet-IC	3.1V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
61	-	AP8822N-31GT	Vdet-IC	3.1V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
61	-	AP8822N-31PA	Vdet-IC	3.1V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
61	-	AP8822N-31PT	Vdet-IC	3.1V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
61	-	CHDTC143ZMPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/47k	SOT-723	18ta	-	3a	Chm
610	-	KV1610S	C-diode	Dual, AM-Tunung, 26V, 50mA, 100mW, 194/46pF(8..1V)	SOT-23	16dg	-	3a	Tok
614	-	FMMT614	Si-npn-Darl	GP, 120/100V, 500mA, 500mW, B>15000	SOT-23	16ta	-	3a	Zx
615	cm	XC9111B151MR	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
616	cm	XC9111B161MR	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
617	-	FMMT617	Si-npn	Sw, Lo-sat, 15V, 3A, 625mW 120/160ns	SOT-23	16ta	-	3a	Zx
617	cm	XC9111B171MR	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
618	-	FMMT618	Si-npn	Sw, Lo-sat, 20V, 2.5A, 625mW, B=300..450, >140MHz	SOT-23	16ta	-	3a	Zx
618	cm	XC9111B181MR	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
619	-	FMMT619	Si-npn	Sw, Lo-sat, 50V, 2A, 625mW, B=300..450, >160MHz	SOT-23	16ta	-	3a	Zx
619	cm	XC9111B191MR	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
61B	-	MMBZ5261BPT	Z-diode	44.65..49.35V, Izt=2.7mA, Zzt=105Ω, 225mW	SOT-23	16dc	-	3a	Chm
61S	-	MMBZ5261SPT	Z-diode	46.06..47.94V, Izt=2.7mA, Zzt=105Ω, 225mW	SOT-23	16dc	-	3a	Chm
61S	-	MMCZ5261SPT	Z-diode	46.06..47.94V, Izt=2.7mA, Zzt=105Ω, 225mW	SOT-346	16dc	-	3a	Chm
62	-	AP8822N-32GA	Vdet-IC	3.2V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
62	-	AP8822N-32GT	Vdet-IC	3.2V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
62	-	AP8822N-32PA	Vdet-IC	3.2V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
62	-	AP8822N-32PT	Vdet-IC	3.2V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
62	-	CHDTC144EMPT	Si-npn-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/47k	SOT-723	18ta	-	3a	Chm
62	-	DTC123YE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2k2/10k	SOT-416	16ta	-	3a	Rhm
62	-	DTC123YKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/10k	SOT-346	16ta	-	3a	Rhm
62	-	DTC123YUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/10k	UMT3	16ta	-	3a	Rhm
62	-	LBZX84B3V6L	Z-diode	3.6..3.845V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
62	-	MAZW062H	SAZ-diode	Dual, 6.2V, 5mA, 150mW	SSSMini3	18df	-	3a	Pan
62	-	PDTA115EK	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k	SC-59	16ta	-	3a	Nxp
620	cm	XC9111B201MR	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
621	-	HZM6.2NB1	Z-diode	5.86..6.12V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
621	-	PZM6.2NB1	Z-diode	6.2V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
621	cm	XC9111B211MR	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
622	-	HZM6.2NB2	Z-diode	6.06..6.33V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
622	-	PZM6.2NB2	Z-diode	6.2V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
622	cm	XC9111B221MR	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
623	-	HZM6.2NB3	Z-diode	6.26..6.53V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
623	-	PZM6.2NB3	Z-diode	6.2V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
623	cm	XC9111B231MR	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
624	-	FMMT624	Si-npn	Sw, Lo-sat, 125V, 1A, 625mW, B=300..450, >155MHz	SOT-23	16ta	-	3a	Zx
624	cm	XC9111B241MR	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
625	-	FMMT625	Si-npn	Sw, Lo-sat, 150V, 1A, 625mW, B=300..450, >135MHz	SOT-23	16ta	-	3a	Zx
625	cm	XC9111B251MR	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
626	cm	XC9111B261MR	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
627	cm	XC9111B271MR	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
628	cm	XC9111B281MR	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
629	cm	XC9111B291MR	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
62B	-	MMBZ5262BPT	Z-diode	48.45..53.35V, Izt=2.5mA, Zzt=125Ω, 225mW	SOT-23	16dc	-	3a	Chm
62B	-	MMCZ5262BPT	Z-diode	48.45..53.35V, Izt=2.5mA, Zzt=125Ω, 225mW	SOT-346	16dc	-	3a	Chm
62S	-	MMBZ5262SPT	Z-diode	49.98..52.02V, Izt=2.5mA, Zzt=125Ω, 225mW	SOT-23	16dc	-	3a	Chm
62S	-	MMCZ5262SPT	Z-diode	49.98..52.02V, Izt=2.5mA, Zzt=125Ω, 225mW	SOT-346	16dc	-	3a	Chm
62V	-	PZM62NB	Z-diode	62V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
62V	-	PZM62NB1	Z-diode	62V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
63	-	AP8822N-33GA	Vdet-IC	3.3V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
63	-	AP8822N-33GT	Vdet-IC	3.3V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
63	-	AP8822N-33PA	Vdet-IC	3.3V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
63	-	AP8822N-33PT	Vdet-IC	3.3V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
63	-	BAT64	Si-diode	SBD, Fast-Sw, 30V, 250mA, Vf<0.75V, Cd<6pF	SOT-23	16dc	-	3a	Cdi

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
63	-	CHDTC144VMPT	Si-npn-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/10k	SOT-723	18ta	-	3a	Chm
63	-	CSA1163	Si-pnp	GP, 120V, 100mA, 150mW, B=200..700, 100MHz	SOT-23	16ta	-	3a	Cdi
6-3	-	1PS70SB40	Si-diode	Schottky, Sw, Fast, 40V, 120mA, <100ps	SOT-323	16dc	-	3a	NxH
63-	-	BAS40W	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dc	-	3a	NxH
630	cm	XC9111B301MR	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
631	cm	XC9111B311MR	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
632	cm	XC9111B321MR	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
633	cm	XC9111B331MR	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
634	cm	XC9111B341MR	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
635	cm	XC9111B351MR	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
636	cm	XC9111B361MR	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
637	cm	XC9111B371MR	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
638	cm	XC9111B381MR	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
639	cm	XC9111B391MR	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
63B	-	MMBZ5263BPT	Z-diode	53.20..58.80V, Izt=2.2mA, Zzt=150Ω, 225mW	SOT-23	16dc	-	3a	Chm
63B	-	MMCZ5263BPT	Z-diode	53.20..58.80V, Izt=2.2mA, Zzt=150Ω, 225mW	SOT-346	16dc	-	3a	Chm
63G	-	CSA1163G	Si-pnp	GP, 120V, 100mA, 150mW, B=200..400, 100MHz	SOT-23	16ta	-	3a	Cdi
63L	-	CSA1163L	Si-pnp	GP, 120V, 100mA, 150mW, B=350..700, 100MHz	SOT-23	16ta	-	3a	Cdi
63p	-	BAS40W	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dc	-	3a	NxH
63s	-	BAT64	Si-diode	SBD, Fast-Sw, 30V, 250mA, Vf<0.75V, Cd<6pF	SOT-23	16dc	-	3c	Inf
63s	-	BAT64W	Si-diode	SBD, Fast-Sw, 30V, 250mA, Vf<0.75V, Cd<6pF	SOT-323	16dc	-	3c	Inf
63S	-	MMBZ5263SPT	Z-diode	54.88..57.12V, Izt=2.2mA, Zzt=150Ω, 225mW	SOT-23	16dc	-	3a	Chm
63S	-	MMCZ5263SPT	Z-diode	54.88..57.12V, Izt=2.2mA, Zzt=150Ω, 225mW	SOT-346	16dc	-	3a	Chm
63t	-	BAS40W	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dc	-	3a	NxM
63W	-	BAS40W	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dc	-	3a	NxC
64	-	AP8822N-34GA	Vdet-IC	3.4V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
64	-	AP8822N-34GT	Vdet-IC	3.4V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
64	-	AP8822N-34PA	Vdet-IC	3.4V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
64	-	AP8822N-34PT	Vdet-IC	3.4V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
64	-	BAT64-04	Si-diode	Dual, SBD, Fast-Sw, 30V, 250mA, Vf<0.75V, Cd<6pF	SOT-23	16dl	-	3a	Cdi
64	-	CHDTC144WMPT	Si-npn-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/22k	SOT-723	18ta	-	3a	Chm
64	-	DTC114YE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=10/47k	SOT-416	16ta	-	3a	Rhm
64	-	DTC114YKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10/47k	SOT-346	16ta	-	3a	Rhm
64	-	DTC114YM	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=10/47k	VMT3	18ta	-	3a	Rhm
64	-	DTC114YUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10/47k	UMT3	16ta	-	3a	Rhm
6-4	-	1PS70SB44	Si-diode	Dual, SBD, Sw, Fast, 40V, 120mA, <100ps	SOT-323	16dl	-	3a	NxH
64-	-	BAS40-04W	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dl	-	3a	NxH
640	cm	XC9111B401MR	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
641	cm	XC9111B411MR	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
642	cm	XC9111B421MR	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
643	cm	XC9111B431MR	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
644	cm	XC9111B441MR	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
645	cm	XC9111B451MR	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
646	cm	XC9111B461MR	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
647	cm	XC9111B471MR	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
648	cm	XC9111B481MR	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
649	cm	XC9111B491MR	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
64B	-	MMBZ5264BPT	Z-diode	57.0..63.0V, Izt=2.1mA, Zzt=170Ω, 225mW	SOT-23	16dc	-	3a	Chm
64B	-	MMCZ5264BPT	Z-diode	57.0..63.0V, Izt=2.1mA, Zzt=170Ω, 225mW	SOT-346	16dc	-	3a	Chm
64p	-	BAS40-04W	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dl	-	3a	NxH
64s	-	BAT64-04	Si-diode	Dual, SBD, Fast-Sw, 30V, 250mA, Vf<0.75V, Cd<6pF	SOT-23	16dl	-	3c	Inf
64s	-	BAT64-04W	Si-diode	Dual, SBD, Fast-Sw, 30V, 250mA, Vf<0.75V, Cd<6pF	SOT-323	16dl	-	3c	Inf
64S	-	MMBZ5264SPT	Z-diode	58.80..61.20V, Izt=2.1mA, Zzt=170Ω, 225mW	SOT-23	16dc	-	3a	Chm
64S	-	MMCZ5264SPT	Z-diode	58.80..61.20V, Izt=2.1mA, Zzt=170Ω, 225mW	SOT-346	16dc	-	3a	Chm
64t	-	BAS40-04W	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dl	-	3a	NxM
64W	-	BAS40-04W	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dl	-	3a	NxC
65	-	AP8822N-35GA	Vdet-IC	3.5V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
65	-	AP8822N-35GT	Vdet-IC	3.5V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
65	-	AP8822N-35PA	Vdet-IC	3.5V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
65	-	AP8822N-35PT	Vdet-IC	3.5V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
65	-	BAT64-05	Si-diode	Dual, SBD, Fast-Sw, 30V, 250mA, Vf<0.75V, Cd<6pF	SOT-23	16dg	-	3a	Cdi
6-5	-	1PS70SB45	Si-diode	Dual, SBD, Sw, Fast, 40V, 120mA, <100ps	SOT-323	16dg	-	3a	NxH
65-	-	BAS40-05W	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dg	-	3a	NxH
650	-	LN6206P311MR	LVR-IC	LDO, 3.1V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
650	-	XC6206P311MR	LVR-IC	LDO, 3.1V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
650	cm	XC9111B501MR	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
651	cm	XC9111B511MR	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
652	cm	XC9111B521MR	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
653	cm	XC9111B531MR	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
654	cm	XC9111B541MR	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
655	cm	XC9111B551MR	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
656	cm	XC9111B561MR	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
657	cm	XC9111B571MR	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
658	cm	XC9111B581MR	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
659	cm	XC9111B591MR	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
65B	-	LN6206P122MR	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65B	-	MMBZ5265BPT	Z-diode	58.90..65.10V, Izt=2mA, Zzt=185Ω, 225mW	SOT-23	16dc	-	3a	Chm
65B	-	MMCZ5265BPT	Z-diode	58.90..65.10V, Izt=2mA, Zzt=185Ω, 225mW	SOT-346	16dc	-	3a	Chm
65B	-	XC6206P122MR	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65C	-	LN6206P132MR	LVR-IC	LDO, 1.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65C	-	XC6206P132MR	LVR-IC	LDO, 1.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65D	-	LN6206P142MR	LVR-IC	LDO, 1.4V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65D	-	XC6206P142MR	LVR-IC	LDO, 1.4V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65E	-	LN6206P152MR	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65E	-	XC6206P152MR	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65F	-	LN6206P162MR	LVR-IC	LDO, 1.6V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65F	-	XC6206P162MR	LVR-IC	LDO, 1.6V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65H	-	LN6206P172MR	LVR-IC	LDO, 1.7V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65H	-	XC6206P172MR	LVR-IC	LDO, 1.7V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65K	-	LN6206P182MR	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65K	-	XC6206P182MR	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65L	-	LN6206P192MR	LVR-IC	LDO, 1.9V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65L	-	XC6206P192MR	LVR-IC	LDO, 1.9V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65M	-	LN6206P202MR	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65M	-	XC6206P202MR	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65N	-	LN6206P212MR	LVR-IC	LDO, 2.1V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65N	-	XC6206P212MR	LVR-IC	LDO, 2.1V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65p	-	BAS40-05W	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dg	-	3a	NxH
65P	-	LN6206P222MR	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65P	-	XC6206P222MR	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65R	-	LN6206P232MR	LVR-IC	LDO, 2.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65R	-	XC6206P232MR	LVR-IC	LDO, 2.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65s	-	BAT64-05	Si-diode	Dual, SBD, Fast-Sw, 30V, 250mA, Vf<0.75V, Cd<6pF	SOT-23	16dg	-	3c	Inf
65s	-	BAT64-05W	Si-diode	Dual, SBD, Fast-Sw, 30V, 250mA, Vf<0.75V, Cd<6pF	SOT-323	16dg	-	3c	Inf
65S	-	LN6206P242MR	LVR-IC	LDO, 2.4V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65S	-	MMBZ5265SPT	Z-diode	60.76..63.24V, Izt=2mA, Zzt=185Ω, 225mW	SOT-23	16dc	-	3a	Chm
65S	-	MMCZ5265SPT	Z-diode	60.76..63.24V, Izt=2mA, Zzt=185Ω, 225mW	SOT-346	16dc	-	3a	Chm
65S	-	XC6206P242MR	LVR-IC	LDO, 2.4V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65t	-	BAS40-05W	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dg	-	3a	NxM
65T	-	LN6206P252MR	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65T	-	XC6206P252MR	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65U	-	LN6206P262MR	LVR-IC	LDO, 2.6V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65U	-	XC6206P262MR	LVR-IC	LDO, 2.6V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65V	-	LN6206P272MR	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65V	-	XC6206P272MR	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65W	-	BAS40-05W	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dg	-	3a	NxC
65X	-	LN6206P282MR	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65X	-	XC6206P282MR	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65Y	-	LN6206P292MR	LVR-IC	LDO, 2.9V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65Y	-	XC6206P292MR	LVR-IC	LDO, 2.9V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
65Z	-	LN6206P302MR	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
65Z	-	XC6206P302MR	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
66	-	AP8822N-36GA	Vdet-IC	3.6V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
66	-	AP8822N-36GT	Vdet-IC	3.6V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
66	-	AP8822N-36PA	Vdet-IC	3.6V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
66	-	AP8822N-36PT	Vdet-IC	3.6V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
66	-	BAT64-06	Si-diode	Dual, SBD, Fast-Sw, 30V, 250mA, Vfl<0.75V, Cd<6pF	SOT-23	16df	-	3a	Cdi
6-6	-	1PS70SB46	Si-diode	Dual, SBD, Sw, Fast, 40V, 120mA, <100ps	SOT-323	16df	-	3a	NxH
66-	-	BAS40-06W	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dg	-	3a	NxH
660	cm	XC9111B601MR	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
661	-	LN6206P322MR	LVR-IC	LDO, 3.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
661	-	XC6206P322MR	LVR-IC	LDO, 3.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
661	cm	XC9111B611MR	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
662	-	LN6206P332MR	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
662	-	XC6206P332MR	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
662	cm	XC9111B621MR	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
663	-	LN6206P342MR	LVR-IC	LDO, 3.4V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
663	-	XC6206P342MR	LVR-IC	LDO, 3.4V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
663	cm	XC9111B631MR	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
664	-	LN6206P352MR	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
664	-	XC6206P352MR	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
664	cm	XC9111B641MR	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
665	-	LN6206P362MR	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
665	-	XC6206P362MR	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
665	cm	XC9111B651MR	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
666	-	LN6206P372MR	LVR-IC	LDO, 3.7V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
666	-	XC6206P372MR	LVR-IC	LDO, 3.7V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
666	cm	XC9111B661MR	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
667	-	LN6206P382MR	LVR-IC	LDO, 3.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
667	-	XC6206P382MR	LVR-IC	LDO, 3.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
667	cm	XC9111B671MR	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
668	-	LN6206P392MR	LVR-IC	LDO, 3.9V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
668	-	XC6206P392MR	LVR-IC	LDO, 3.9V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
668	cm	XC9111B681MR	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
669	-	LN6206P402MR	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
669	-	XC6206P402MR	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
669	cm	XC9111B691MR	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
66A	-	LN6206P412MR	LVR-IC	LDO, 4.1V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
66A	-	XC6206P412MR	LVR-IC	LDO, 4.1V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
66B	-	LN6206P422MR	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
66B	-	MMBZ5266BPT	Z-diode	64.60..71.40V, Izt=1.8mA, Zzt=230Ω, 225mW	SOT-23	16dc	-	3a	Chm
66B	-	MMCZ5266BPT	Z-diode	64.60..71.40V, Izt=1.8mA, Zzt=230Ω, 225mW	SOT-346	16dc	-	3a	Chm
66B	-	XC6206P422MR	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
66C	-	LN6206P432MR	LVR-IC	LDO, 4.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
66C	-	XC6206P432MR	LVR-IC	LDO, 4.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
66D	-	LN6206P442MR	LVR-IC	LDO, 4.4V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
66D	-	XC6206P442MR	LVR-IC	LDO, 4.4V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
66E	-	LN6206P452MR	LVR-IC	LDO, 4.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
66E	-	XC6206P452MR	LVR-IC	LDO, 4.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
66G	-	LN6206P462MR	LVR-IC	LDO, 4.6V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
66G	-	XC6206P462MR	LVR-IC	LDO, 4.6V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
66H	-	LN6206P472MR	LVR-IC	LDO, 4.7V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
66H	-	XC6206P472MR	LVR-IC	LDO, 4.7V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
66K	-	LN6206P482MR	LVR-IC	LDO, 4.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
66K	-	XC6206P482MR	LVR-IC	LDO, 4.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
66L	-	LN6206P492MR	LVR-IC	LDO, 4.9V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
66L	-	XC6206P492MR	LVR-IC	LDO, 4.9V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
66M	-	LN6206P502MR	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
66M	-	XC6206P502MR	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
66p	-	BAS40-06W	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dg	-	3a	NxH
66s	-	BAT64-06	Si-diode	Dual, SBD, Fast-Sw, 30V, 250mA, Vfl<0.75V, Cd<6pF	SOT-23	16df	-	3c	Inf
66s	-	BAT64-06W	Si-diode	Dual, SBD, Fast-Sw, 30V, 250mA, Vfl<0.75V, Cd<6pF	SOT-323	16df	-	3c	Inf
66S	-	MMBZ5266SPT	Z-diode	66.64..69.36V, Izt=1.8mA, Zzt=230Ω, 225mW	SOT-23	16dc	-	3a	Chm
66S	-	MMCZ5266SPT	Z-diode	66.64..69.36V, Izt=1.8mA, Zzt=230Ω, 225mW	SOT-346	16dc	-	3a	Chm
66t	-	BAS40-06W	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dg	-	3a	NxM
66W	-	BAS40-06W	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dg	-	3a	NxC
67	-	AP8822N-37GA	Vdet-IC	3.7V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
67	-	AP8822N-37GT	Vdet-IC	3.7V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
67	-	AP8822N-37PA	Vdet-IC	3.7V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
67	-	AP8822N-37PT	Vdet-IC	3.7V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
670	cm	XC9111B701MR	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA	SOT-23	16sw	DC5	3d	Tor
67B	-	MMBZ5267BPT	Z-diode	71.25..78.75V, Izt=1.7mA, Zzt=270Ω, 225mW	SOT-23	16dc	-	3a	Chm
67B	-	MMCZ5267BPT	Z-diode	71.25..78.75V, Izt=1.7mA, Zzt=270Ω, 225mW	SOT-346	16dc	-	3a	Chm
67S	-	MMBZ5267SPT	Z-diode	73.50..76.50V, Izt=1.7mA, Zzt=270Ω, 225mW	SOT-23	16dc	-	3a	Chm
67S	-	MMCZ5267SPT	Z-diode	73.50..76.50V, Izt=1.7mA, Zzt=270Ω, 225mW	SOT-346	16dc	-	3a	Chm
68	-	AP8822N-38GA	Vdet-IC	3.8V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
68	-	AP8822N-38GT	Vdet-IC	3.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
68	-	AP8822N-38PA	Vdet-IC	3.8V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
68	-	AP8822N-38PT	Vdet-IC	3.8V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
68	-	MAZW068H	SAZ-diode	Dual, 6.8V, 5mA, 150mW	SSSMini3	18df	-	3a	Pan
680	-	HZM6.8NB	Z-diode	6.47..7.14V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
681	-	HZM6.8NB1	Z-diode	6.47..6.73V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
681	-	PZM6.8NB1	Z-diode	6.8V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
682	-	HZM6.8NB2	Z-diode	6.65..6.93V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
682	-	PZM6.8NB2	Z-diode	6.8V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
683	-	HZM6.8NB3	Z-diode	6.86..7.14V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
683	-	PZM6.8NB3	Z-diode	6.8V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
686Ax	-	SS8037L263GT72	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Ssc
686Bx	-	SS8037L293GT72	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Ssc
686Cx	-	SS8037L308GT72	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Ssc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
686Dx	-	SS8037L400GT72	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Ssc
686Ex	-	SS8037L438GT72	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Ssc
686Fx	-	SS8037L463GT72	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Ssc
686Gx	-	SS8037H263GT72	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
686Hx	-	SS8037H293GT72	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
686Ix	-	SS8037H308GT72	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
686Jx	-	SS8037H400GT72	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
686Kx	-	SS8037H438GT72	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
686Lx	-	SS8037H463GT72	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
687Ax	-	SS8038L263GT72	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
687Bx	-	SS8038L293GT72	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
687Cx	-	SS8038L308GT72	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
687Dx	-	SS8038L400GT72	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
687Ex	-	SS8038L438GT72	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
687Fx	-	SS8038L463GT72	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
688Ax	-	SS8037L263GT71	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Ssc
688Bx	-	SS8037L293GT71	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Ssc
688Cx	-	SS8037L308GT71	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Ssc
688Dx	-	SS8037L400GT71	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Ssc
688Ex	-	SS8037L438GT71	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Ssc
688Fx	-	SS8037L463GT71	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Ssc
688Gx	-	SS8037H263GT71	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3a	Ssc
688Hx	-	SS8037H293GT71	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3a	Ssc
688Ix	-	SS8037H308GT71	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3a	Ssc
688Jx	-	SS8037H400GT71	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3a	Ssc
688Kx	-	SS8037H438GT71	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3a	Ssc
688Lx	-	SS8037H463GT71	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3a	Ssc
689Ax	-	SS8038L263GT71	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Ssc
689Bx	-	SS8038L293GT71	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Ssc
689Cx	-	SS8038L308GT71	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Ssc
689Dx	-	SS8038L400GT71	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Ssc
689Ex	-	SS8038L438GT71	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Ssc
689Fx	-	SS8038L463GT71	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Ssc
68B	-	MMBZ5268BPT	Z-diode	77.90..86.10V, Izt=1.5mA, Zzt=330Ω, 225mW	SOT-23	16dc	-	3a	Chm
68B	-	MMCZ5268BPT	Z-diode	77.90..86.10V, Izt=1.5mA, Zzt=330Ω, 225mW	SOT-346	16dc	-	3a	Chm
68S	-	MMBZ5268SPT	Z-diode	80.36..83.64V, Izt=1.5mA, Zzt=330Ω, 225mW	SOT-23	16dc	-	3a	Chm
68S	-	MMCZ5268SPT	Z-diode	80.36..83.64V, Izt=1.5mA, Zzt=330Ω, 225mW	SOT-346	16dc	-	3a	Chm
68V	-	PZM68NB	Z-diode	68V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
68V	-	PZM68NB1	Z-diode	68V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
69	-	AP8822N-39GA	Vdet-IC	3.9V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
69	-	AP8822N-39GT	Vdet-IC	3.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
69	-	AP8822N-39PA	Vdet-IC	3.9V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
69	-	AP8822N-39PT	Vdet-IC	3.9V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
69	-	ELM7619LCB	Vdet-IC	1.9V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
690Ax	-	SS8037L263GT73	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ssc
690Bx	-	SS8037L293GT73	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ssc
690Cx	-	SS8037L308GT73	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ssc
690Dx	-	SS8037L400GT73	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ssc
690Ex	-	SS8037L438GT73	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ssc
690Fx	-	SS8037L463GT73	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ssc
690Gx	-	SS8037H263GT73	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ssc
690Hx	-	SS8037H293GT73	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ssc
690Ix	-	SS8037H308GT73	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ssc
690Jx	-	SS8037H400GT73	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ssc
690Kx	-	SS8037H438GT73	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ssc
690Lx	-	SS8037H463GT73	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ssc
691Ax	-	SS8038L263GT73	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Ssc
691Bx	-	SS8038L293GT73	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Ssc
691Cx	-	SS8038L308GT73	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Ssc
691Dx	-	SS8038L400GT73	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Ssc
691Ex	-	SS8038L438GT73	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Ssc
691Fx	-	SS8038L463GT73	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Ssc
69B	-	MMBZ5269BPT	Z-diode	82.65..91.35V, Izt=1.4mA, Zzt=370Ω, 225mW	SOT-23	16dc	-	3a	Chm
69B	-	MMCZ5269BPT	Z-diode	82.65..91.35V, Izt=1.4mA, Zzt=370Ω, 225mW	SOT-346	16dc	-	3a	Chm
69S	-	MMBZ5269SPT	Z-diode	85.26..88.74V, Izt=1.4mA, Zzt=370Ω, 225mW	SOT-23	16dc	-	3a	Chm
69S	-	MMCZ5269SPT	Z-diode	85.26..88.74V, Izt=1.4mA, Zzt=370Ω, 225mW	SOT-346	16dc	-	3a	Chm
6A	-	BC817-16	Si-npn	GP, 50V, 500mA, 250mW, B=100..250, 100MHz	SOT-23	16ta	-	3a	PhH
6A	-	BC817-16W	Si-npn	GP, 50V, 500mA, 200mW, B=100..250, 100MHz	SOT-323	16ta	-	3a	PhH
6A	-	DA121T	Si-diode	Sw, 80V, 200mA, 225mW, Vf<1.25V(150mA), <6ns	SOT-416	16dc	-	3b	Ons
6A	-	DTA114EE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-416	16ta	-	3a	Ons



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6A	-	FT531Ah	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6A	-	KIA7019AT	Vdet-IC	1.9V, -Reset OCO	TSM	16vdb	VD6	3f	Kec
6A	-	MUN2111	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SC-59	16ta	-	3a	Mot
6A	-	MUN5111	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SOT-323	16ta	-	3a	Mot
6A	-	PDTC123EEF	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k	SOT-490	18ta	-	3a	Nxp
6A	-	PDTC123JEF	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k	SOT-490	18ta	-	3a	Nxp
6A	-	R3131N16EC	Vdet-IC	1.6V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
6A	-	UN2111	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=10k/10k	SC-59	16ta	-	3a	Pan
6A	-	UN5111	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	Pan
6A	-	UN9111J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=10k/10k	SS-MiniF	18ta	-	3a	Pan
6A	-	UNR2111	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=10k/10k	SC-59	16ta	-	3a	Pan
6A	-	UNR5111	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=10k/10k	SOT-323	16ta	-	3a	Pan
6A	-	UNR9111J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=10k/10k	SS-MiniF	18ta	-	3a	Pan
6A0	-	TC55RP602ECB	LVR-IC	LDO, 6.0V±2%, 250mA	SOT-23	16cq	VR1	3d	Mcc
6A0	-	XC62FP6002M	LVR-IC	6.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Tor
6A2	-	MMBZ6V2A	TVS	Dual, Vrwm=3.0V, Vbr=5.89..6.51V, 2.76A, 24W(1ms)	SOT-23	16dg	-	3a	Wtr
6A2	-	PZM6.2NB2A	Z-diode	Dual, 6.2V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
6A5	-	TC596002ECB	LVR-IC	LDO, -6.0V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
6A5	-	XC62KN602M	LVR-IC	LDO, -6.0V±2%, 100mA, 150mW	SOT-23	16cj	VR2	3d	Tor
6A8	-	MMBZ6V8A	TVS	Dual, Vrwm=4.5V, Vbr=6.46..7.14V, 2.5A, 24W(1ms)	SOT-23	16dg	-	3a	Wtr
6A8	-	PZM6.8NB2A	Z-diode	Dual, 6.8V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
6AC2	-	81C60-P-AE3-2	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23	16vdy	VD7	3a	Utc
6AC2G	-	81C60G-P-AE3-2	Vdet-IC	6.0V±2%, -Reset PPO, halogen free	SOT-23	16vdy	VD7	3a	Utc
6AC2L	-	81C60L-P-AE3-2	Vdet-IC	6.0V±2%, -Reset PPO, lead free	SOT-23	16vdy	VD7	3a	Utc
6AC3	-	81C60-P-AE3-3	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
6AC3G	-	81C60G-P-AE3-3	Vdet-IC	6.0V±2%, -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
6AC3L	-	81C60L-P-AE3-3	Vdet-IC	6.0V±2%, -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
6AC5	-	81C60-P-AE3-5	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Utc
6AC5G	-	81C60G-P-AE3-5	Vdet-IC	6.0V±2%, -Reset PPO, halogen free	SOT-23	16vdc	VD7	3a	Utc
6AC5L	-	81C60L-P-AE3-5	Vdet-IC	6.0V±2%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3a	Utc
6Ag	-	FT531Ag	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6AN2	-	81N60-P-AE3-2	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23	16vdy	VD6	3a	Utc
6AN2G	-	81N60G-P-AE3-2	Vdet-IC	6.0V±2%, -Reset ODO, halogen free	SOT-23	16vdy	VD6	3a	Utc
6AN2L	-	81N60L-P-AE3-2	Vdet-IC	6.0V±2%, -Reset ODO, lead free	SOT-23	16vdy	VD6	3a	Utc
6AN3	-	81N60-P-AE3-3	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
6AN3G	-	81N60G-P-AE3-3	Vdet-IC	6.0V±2%, -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
6AN3L	-	81N60L-P-AE3-3	Vdet-IC	6.0V±2%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
6AN5	-	81N60-P-AE3-5	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23	16vdc	VD6	3a	Utc
6AN5G	-	81N60G-P-AE3-5	Vdet-IC	6.0V±2%, -Reset ODO, halogen free	SOT-23	16vdc	VD6	3a	Utc
6AN5L	-	81N60L-P-AE3-5	Vdet-IC	6.0V±2%, -Reset ODO, lead free	SOT-23	16vdc	VD6	3a	Utc
6Ap	-	BC817-16	Si-npn	GP, 50V, 500mA, 250mW, B=100..250, 100MHz	SOT-23	16ta	-	3a	PhH
6Ap	-	BC817-16W	Si-npn	GP, 50V, 500mA, 200mW, B=100..250, 100MHz	SOT-323	16ta	-	3a	PhH
6As	-	BC817-16	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=100..250, >200MHz	SOT-23	16ta	-	3a	Sie
6At	-	BC817-16	Si-npn	GP, 50V, 500mA, 250mW, B=100..250, 100MHz	SOT-23	16ta	-	3a	PhM
6At	-	BC817-16W	Si-npn	GP, 50V, 500mA, 200mW, B=100..250, 100MHz	SOT-323	16ta	-	3a	PhH
6AW	-	BC817-16	Si-npn	GP, 50V, 500mA, 250mW, B=100..250, 100MHz	SOT-23	16ta	-	3a	PhC
6AW	-	BC817-16W	Si-npn	GP, 50V, 500mA, 200mW, B=100..250, 100MHz	SOT-323	16ta	-	3a	PhC
6AZ	-	BC817-16	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=100..250, >200MHz	SOT-23	16ta	-	3a	Zx
6B	-	BC817-25	Si-npn	GP, 50V, 500mA, 250mW, B=160..400, 100MHz	SOT-23	16ta	-	3a	PhH
6B	-	BC817-25W	Si-npn	GP, 50V, 500mA, 200mW, B=160..400, 100MHz	SOT-323	16ta	-	3a	PhH
6B	-	DTA124EE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/22k	SOT-416	16ta	-	3a	Ons
6B	-	FT531Bh	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6B	-	KIA7021AT	Vdet-IC	2.1V, -Reset OCO	TSM	16vdb	VD6	3f	Kec
6B	-	MMBF5484	n-FET	VHF-UHF-Amp, 25V, 10mA, 200mW, Up<3V	SOT-23	16fj	-	3a	Ons
6B	-	MUN2112	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SC-59	16ta	-	3a	Mot
6B	-	MUN5112	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SOT-323	16ta	-	3a	Mot
6B	-	PDTA115EEF	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k	SOT-490	18ta	-	3a	Nxp
6B	-	R3131N26EC	Vdet-IC	2.6V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
6B	-	STZ6.2N	Z-diode	Dual, 5.81..6.4V, Zzt<60Ω(5mA), 100mW	SOT-346	16df	-	3a	Rhm
6B	-	UN2112	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=22k/22k	SC-59	16ta	-	3a	Pan
6B	-	UN5112	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=22k/22k	SOT-23	16ta	-	3a	Pan
6B	-	UN9112J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=22k/22k	SS-MiniF	18ta	-	3a	Pan
6B	-	UNR2112	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=22k/22k	SC-59	16ta	-	3a	Pan
6B	-	UNR5112	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=22k/22k	SOT-323	16ta	-	3a	Pan
6B	-	UNR9112J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=22k/22k	SS-MiniF	18ta	-	3a	Pan
6B5	-	TC596102ECB	LVR-IC	LDO, -6.1V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
6Bg	-	FT531Bg	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6BG	-	CMPF4416A	n-FET	AF, 35V, Idss=5..15mA, Vgs(off)=2.5..6V, Nf=2dB	SOT-23	16fk	-	3a	Cen
6Bp	-	BC817-25	Si-npn	GP, 50V, 500mA, 250mW, B=160..400, 100MHz	SOT-23	16ta	-	3a	PhH
6Bp	-	BC817-25W	Si-npn	GP, 50V, 500mA, 200mW, B=160..400, 100MHz	SOT-323	16ta	-	3a	PhH



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6Bs	-	BC817-25	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=160..400, >200MHz	SOT-23	16ta	-	3a	Sie
6Bs	-	BC817-25W	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=160..400, >200MHz	SOT-323	16ta	-	3a	Sie
6Bt	-	BC817-25	Si-npn	GP, 50V, 500mA, 250mW, B=160..400, 100MHz	SOT-23	16ta	-	3a	PhM
6Bt	-	BC817-25W	Si-npn	GP, 50V, 500mA, 200mW, B=160..400, 100MHz	SOT-323	16ta	-	3a	PhM
6BW	-	BC817-25	Si-npn	GP, 50V, 500mA, 250mW, B=160..400, 100MHz	SOT-23	16ta	-	3a	PhC
6BW	-	BC817-25W	Si-npn	GP, 50V, 500mA, 200mW, B=160..400, 100MHz	SOT-323	16ta	-	3a	PhC
6BZ	-	BC817-25	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=160..400, >200MHz	SOT-23	16ta	-	3a	Zx
6C	-	BC817-40	Si-npn	GP, 50V, 500mA, 250mW, B=250..600, 100MHz	SOT-23	16ta	-	3a	PhH
6C	-	BC817-40W	Si-npn	GP, 50V, 500mA, 200mW, B=250..600, 100MHz	SOT-323	16ta	-	3a	PhH
6C	-	DTA144EE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/47k	SOT-416	16ta	-	3a	Ons
6C	-	EMZ6.8N	Z-diode	Dual, 6.47..7.14V, Zzt<40Ω(5mA), 150mW	SOT-23	16df	-	3a	Rhm
6C	-	FT531Ch	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6C	-	KIA7023AT	Vdet-IC	2.3V, -Reset OCO	TSM	16vdb	VD6	3f	Kec
6C	-	MUN2113	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SC-59	16ta	-	3a	Mot
6C	-	MUN5113T1	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SOT-323	16ta	-	3a	Mot
6C	-	PDTA123EEF	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k	SOT-490	18ta	-	3a	Nxp
6C	-	R3131N36EC	Vdet-IC	3.6V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
6C	-	STZ6.8N	Z-diode	Dual, 6.47..7.14V, Zzt<40Ω(5mA), 100mW	SOT-346	16df	-	3a	Rhm
6C	-	UN2113	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=47k/47k	SC-59	16ta	-	3a	Pan
6C	-	UN5113	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=47k/47k	SOT-23	16ta	-	3a	Pan
6C	-	UN9113J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=47k/47k	SS-MiniF	18ta	-	3a	Pan
6C	-	UNR2113	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=47k/47k	SC-59	16ta	-	3a	Pan
6C	-	UNR3113	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 80MHz, R1/R2=47k/47k	SSSMini3	18ta	-	3a	Pan
6C	-	UNR5113	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=47k/47k	SOT-323	16ta	-	3a	Pan
6C	-	UNR9113J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=47k/47k	SS-MiniF	18ta	-	3a	Pan
6C5	-	TC596202ECB	LVR-IC	LDO, -6.2V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
6Cg	-	FT531Cg	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6Cp	-	BC817-40	Si-npn	GP, 50V, 500mA, 250mW, B=250..600, 100MHz	SOT-23	16ta	-	3a	PhH
6Cp	-	BC817-40W	Si-npn	GP, 50V, 500mA, 200mW, B=250..600, 100MHz	SOT-323	16ta	-	3a	PhH
6Cs	-	BC817-40	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=250..630, >200MHz	SOT-23	16ta	-	3a	Sie
6Cs	-	BC817-40W	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=250..630, >200MHz	SOT-323	16ta	-	3a	Sie
6Ct	-	BC817-40	Si-npn	GP, 50V, 500mA, 250mW, B=250..600, 100MHz	SOT-23	16ta	-	3a	PhM
6Ct	-	BC817-40W	Si-npn	GP, 50V, 500mA, 200mW, B=250..600, 100MHz	SOT-323	16ta	-	3a	PhM
6CW	-	BC817-40	Si-npn	GP, 50V, 500mA, 250mW, B=250..600, 100MHz	SOT-23	16ta	-	3a	PhC
6CW	-	BC817-40W	Si-npn	GP, 50V, 500mA, 200mW, B=250..600, 100MHz	SOT-323	16ta	-	3a	PhC
6CZ	-	BC817-40	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=250..630, >200MHz	SOT-23	16ta	-	3a	Zx
6D	-	BC817	Si-npn	GP, 50V, 500mA, 250mW, B=100..600, 100MHz	SOT-23	16ta	-	3a	PhH
6D	-	BC817W	Si-npn	GP, 50V, 500mA, 200mW, B=100..600, 100MHz	SOT-23	16ta	-	3a	PhH
6D	-	DTA114YE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/47k	SOT-416	16ta	-	3a	Ons
6D	-	FT531Dh	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6D	-	KIA7025AT	Vdet-IC	2.5V, -Reset OCO	TSM	16vdb	VD6	3f	Kec
6D	-	MMBF5457	n-FET	GP, 25V, 10mA, 225mW, Up<6V	SOT-23	16fj	-	3a	Ons
6D	-	MUN2114	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10/47k	SC-59	16ta	-	3a	Mot
6D	-	MUN5114	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10/47k	SOT-323	16ta	-	3a	Mot
6D	-	R3131N46EC	Vdet-IC	4.6V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
6D	-	UN2114	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=10k/47k	SC-59	16ta	-	3a	Pan
6D	-	UN5114	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=10k/47k	SOT-23	16ta	-	3a	Pan
6D	-	UN9114J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=10k/47k	SS-MiniF	18ta	-	3a	Pan
6D	-	UNR2114	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=10k/47k	SC-59	16ta	-	3a	Pan
6D	-	UNR5114	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=10k/47k	SOT-323	16ta	-	3a	Pan
6D	-	UNR9114J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=10k/47k	SS-MiniF	18ta	-	3a	Pan
6D5	-	TC596302ECB	LVR-IC	LDO, -6.3V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
6Dg	-	FT531Dg	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6Dp	-	BC817	Si-npn	GP, 50V, 500mA, 250mW, B=100..600, 100MHz	SOT-23	16ta	-	3a	PhH
6Dp	-	BC817W	Si-npn	GP, 50V, 500mA, 200mW, B=100..600, 100MHz	SOT-23	16ta	-	3a	PhH
6Dt	-	BC817	Si-npn	GP, 50V, 500mA, 250mW, B=100..600, 100MHz	SOT-23	16ta	-	3a	PhM
6Dt	-	BC817W	Si-npn	GP, 50V, 500mA, 100mW, B=100..600, 100MHz	SOT-23	16ta	-	3a	PhM
6DW	-	BC817	Si-npn	GP, 50V, 500mA, 250mW, B=100..600, 100MHz	SOT-23	16ta	-	3a	PhC
6DW	-	BC817W	Si-npn	GP, 50V, 500mA, 100mW, B=100..600, 100MHz	SOT-23	16ta	-	3a	PhC
6DZ	-	BC817	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=100..600, >200MHz	SOT-23	16ta	-	3a	Zx
6E	-	BC818-16	Si-npn	AF-Drv, 30V, 500mA, 330mW, B=100..250, >170MHz	SOT-23	16ta	-	3a	Itt
6E	-	DTA114TE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	SOT-416	16ta	-	3a	Ons
6E	-	FMMTA93R	Si-pnp	Vid, 200/200V, 500mA, 330mW, B=25, >50MHz	SOT-23	16te	-	3a	Zx
6E	-	FT531Eh	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6E	-	KIA7027AT	Vdet-IC	2.7V, -Reset OCO	TSM	16vdb	VD6	3f	Kec
6E	-	MMBF5460	n-FET	GP, 40V, 10mA, 225mW, Up<6V	SOT-23	16fj	-	3a	Ons
6E	-	MUN2115	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=10k	SC-59	16ta	-	3a	Mot
6E	-	MUN5115	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=10k	SOT-323	16ta	-	3a	Mot
6E	-	UN2115	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1=10k	SC-59	16ta	-	3a	Pan
6E	-	UN5115	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1=10k	SOT-23	16ta	-	3a	Pan



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6E	-	UN9115J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1=10k	SS-MiniF	18ta	-	3a	Pan
6E	-	UNR2115	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1=10k	SC-59	16ta	-	3a	Pan
6E	-	UNR5115	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1=10k	SOT-323	16ta	-	3a	Pan
6E	-	UNR9115J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1=10k	SS-MiniF	18ta	-	3a	Pan
6E2	-	UM809AS	Vdet-IC	5.0V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6E3	-	UM809BS	Vdet-IC	4.9V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6E4	-	UM809CS	Vdet-IC	4.8V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6E5	-	TC596402ECB	LVR-IC	LDO, -6.4V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
6E5	-	UM809DS	Vdet-IC	4.7V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6E7	-	UM809ES	Vdet-IC	4.5V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6E9	-	UM809FS	Vdet-IC	4.3V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6EA	-	UM809GS	Vdet-IC	4.2V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6EB	-	UM809HS	Vdet-IC	4.1V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6ED	-	UM809IS	Vdet-IC	3.9V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6EE	-	UM809KS	Vdet-IC	3.8V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6EF	-	UM809NS	Vdet-IC	3.7V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6Eg	-	FT531Eg	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6EH	-	UM809OS	Vdet-IC	3.6V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6EJ	-	UM809US	Vdet-IC	3.3V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6EK	-	UM809VS	Vdet-IC	3.2V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6EL	-	UM809PS	Vdet-IC	3.5V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6EM	-	UM809QS	Vdet-IC	3.4V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6Ep	-	BC818-16	Si-npn	AF-Drv, 30V, 500mA, 250mW, B=100..250, >80MHz	SOT-23	16ta	-	3a	PhH
6EP	-	UM809WS	Vdet-IC	3.0V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6ER	-	UM809XS	Vdet-IC	2.8V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6Es	-	BC818-16	Si-npn	AF-Drv, 30V, 500mA, 330mW, B=100..250, 170MHz	SOT-23	16ta	-	3a	Sie
6Es	-	BC818-16W	Si-npn	AF-Drv, 30V, 500mA, 250mW, B=100..250, >170MHz	SOT-323	16ta	-	3a	Sie
6ES	-	UM809YS	Vdet-IC	2.7V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6Et	-	BC818-16W	Si-npn	AF-Drv, 30V, 500mA, 250mW, B=100..250, >170MHz	SOT-323	16ta	-	3a	Phi
6EU	-	UM809ABS	Vdet-IC	2.4V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6EW	-	BC818-16	Si-npn	AF-Drv, 30V, 500mA, 250mW, B=100..250, >80MHz	SOT-23	16ta	-	3a	PhC
6EY	-	UM809AAS	Vdet-IC	2.5V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6EZ	-	BC818-16	Si-npn	AF-Drv, 30V, 500mA, 330mW, B=100..250, >200MHz	SOT-23	16ta	-	3a	Zx
6F	-	BC818-25	Si-npn	AF-Drv, 30V, 500mA, 330mW, B=160..400, >170MHz	SOT-23	16ta	-	3a	Itt
6F	-	DTA143TE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=4k7	SOT-416	16ta	-	3a	Ons
6F	-	FT531Fh	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6F	-	KIA7029AT	Vdet-IC	2.9V, -Reset OCO	TSM	16vdb	VD6	3f	Kec
6F	-	MUN2116	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=4k7	SC-59	16ta	-	3a	Mot
6F	-	MUN5116	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=4k7	SOT-323	16ta	-	3a	Mot
6F	-	R3131N16EA	Vdet-IC	1.6V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
6F	-	STZ5.6N	Z-diode	Dual, 5.31..5.92V, Zzt<60Ω(5mA), 100mW	SOT-346	16df	-	3a	Rhm
6F	-	UN2116	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1=4k7	SC-59	16ta	-	3a	Pan
6F	-	UN5116	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1=4k7	SOT-23	16ta	-	3a	Pan
6F	-	UN9116J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1=4k7	SS-MiniF	18ta	-	3a	Pan
6F	-	UNR2116	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1=4k7	SC-59	16ta	-	3a	Pan
6F	-	UNR5116	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1=4k7	SOT-323	16ta	-	3a	Pan
6F	-	UNR9116J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1=4k7	SS-MiniF	18ta	-	3a	Pan
6F5	-	TC596502ECB	LVR-IC	LDO, -6.5V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
6F5	-	UM809ACS	Vdet-IC	2.2V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6F6	-	UM809ADS	Vdet-IC	2.1V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6F7	-	UM809AES	Vdet-IC	2.0V±1%, -Reset PPO	SOT-23	16vdc	VD7	3c	Uns
6Fg	-	FT531Fg	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6Fp	-	BAP1321-04	PIN-diode	Dual, RF, 60V, 0.1A, 250mW, 0.45pF, 1.3Ω(100mA/100MHz)	SOT-23	16dl	-	3a	PhH
6Fp	-	BC818-25	Si-npn	AF-Drv, 30V, 500mA, 250mW, B=160..400, >80MHz	SOT-23	16ta	-	3a	PhH
6Fs	-	BC818-25	Si-npn	AF-Drv, 30V, 500mA, 330mW, B= 160..400, 170MHz	SOT-23	16ta	-	3a	Sie
6Fs	-	BC818-25W	Si-npn	AF-Drv, 30V, 500mA, 250mW, B=160..400, >170MHz	SOT-323	16ta	-	3a	Sie
6Ft	-	BAP1321-04	PIN-diode	Dual, RF, 60V, 0.1A, 250mW, 0.45pF, 1.3Ω(100mA/100MHz)	SOT-23	16dl	-	3a	PhM
6FW	-	BAP1321-04	PIN-diode	Dual, RF, 60V, 0.1A, 250mW, 0.45pF, 1.3Ω(100mA/100MHz)	SOT-23	16dl	-	3a	PhC
6FW	-	BC818-25	Si-npn	AF-Drv, 30V, 500mA, 250mW, B=160..400, >80MHz	SOT-23	16ta	-	3a	PhC
6FZ	-	BC818-25	Si-npn	AF-Drv, 30V, 500mA, 330mW, B=160..400, >200MHz	SOT-23	16ta	-	3a	Zx
6G	-	BC818-40	Si-npn	AF-Drv, 30V, 500mA, 250mW, B=250..600, >80MHz	SOT-23	16ta	-	3a	Itt
6G	-	CMPF4393	n-FET	AF, 40V, Idss=5..30mA, Vgs(off)=0.5..3V, Rds<100Ω, <50ns	SOT-23	16fj	-	3a	Cen
6G	-	FMMV2103	C-diode	Tuning, 30V, 9..11pF, Q>400	SOT-23	16dc	-	3a	Zx
6G	-	FT531Gh	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6G	-	KIA7031AT	Vdet-IC	3.1V, -Reset OCO	TSM	16vdb	VD6	3f	Kec
6G	-	MMBF4393	n-FET	Sw, 30V, 50mA, 225mA, Rds=100Ω (1mA)	SOT-23	16fj	-	3a	Ons
6G	-	MUN2130	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=1k/1k	SC-59	16ta	-	3a	Mot
6G	-	MUN5130	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=1k/1k	SOT-323	16ta	-	3a	Mot
6G	-	R3131N26EA	Vdet-IC	2.6V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
6Gg	-	FT531Gg	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6Gp	-	BC818-40	Si-npn	AF-Drv, 30V, 500mA, 250mW, B=250..600, >80MHz	SOT-23	16ta	-	3a	PhH
6Gs	-	BC818-40	Si-npn	AF-Drv, 30V, 500mA, 330mW, B=250..630, >170MHz	SOT-23	16ta	-	3a	Sie
6Gs	-	BC818-40W	Si-npn	AF-Drv, 30V, 500mA, 250mW, B=250..630, >170MHz	SOT-323	16ta	-	3a	Sie
6Gt	-	BC818-40W	Si-npn	AF-Drv, 30V, 500mA, 250mW, B=250..630, >170MHz	SOT-323	16ta	-	3a	Phi
6GW	-	BC818-40	Si-npn	AF-Drv, 30V, 500mA, 250mW, B=250..600, >80MHz	SOT-23	16ta	-	3a	PhC
6GZ	-	BC818-40	Si-npn	AF-Drv, 30V, 500mA, 330mW, B=250..630, >200MHz	SOT-23	16ta	-	3a	Zx
6H	-	BC818	Si-npn	AF-Drv, 30V, 500mA, 250mW, B=100..600, >80MHz	SOT-23	16ta	-	3a	Cdi
6H	-	DTA123EE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=2k2/2k2	SOT-416	16ta	-	3a	Ons
6H	-	FMMV2104	C-diode	Tuning, 30V, 10.8..13.2pF, Q>400	SOT-23	16dc	-	3a	Zx
6H	-	FT531Hh	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6H	-	KIA7032AT	Vdet-IC	3.2V, -Reset OCO	TSM	16vdb	VD6	3f	Kec
6H	-	MMBF5486	n-FET	RF, LN, 25V, 10mA, 225mW, Up<4V	SOT-23	16fa	-	3a	Nsc
6H	-	MUN2131	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2k2/2k2	SC-59	16ta	-	3a	Mot
6H	-	MUN5131	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2k2/2k2	SOT-323	16ta	-	3a	Mot
6H	-	R3131N36EA	Vdet-IC	3.6V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
6H	-	UN2117	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1=22k	SC-59	16ta	-	3a	Pan
6H	-	UN5117	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1=22k	SOT-23	16ta	-	3a	Pan
6H	-	UN9117J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1=22k	SS-MiniF	18ta	-	3a	Pan
6H	-	UNR2117	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1=22k	SC-59	16ta	-	3a	Pan
6H	-	UNR5117	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1=22k	SOT-323	16ta	-	3a	Pan
6H	-	UNR9117J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1=22k	SS-MiniF	18ta	-	3a	Pan
6H5	-	TC596602ECB	LVR-IC	LDO, -6.6V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
6Hg	-	FT531Hg	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6Hp	-	BC818	Si-npn	AF-Drv, 30V, 500mA, 250mW, B=100..600, >80MHz	SOT-23	16ta	-	3a	PhH
6Ht	-	BC818W	Si-npn	AF-Drv, 30V, 500mA, 250mW, 100..600, >170MHz	SOT-323	16ta	-	3a	Phi
6HW	-	BC818	Si-npn	AF-Drv, 30V, 500mA, 250mW, B=100..600, >80MHz	SOT-23	16ta	-	3a	PhC
6HZ	-	BC818	Si-npn	AF-Drv, 30V, 500mA, 330mW, B=100..600, >200MHz	SOT-23	16ta	-	3a	Zx
6I	-	FT531Ih	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6I	-	UN2118	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=510R/5k1	SC-59	16ta	-	3a	Pan
6I	-	UN5118	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=510R/5k1	SOT-23	16ta	-	3a	Pan
6I	-	UN9118J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=510R/5k1	SS-MiniF	18ta	-	3a	Pan
6I	-	UNR2118	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=510R/5k1	SC-59	16ta	-	3a	Pan
6I	-	UNR5118	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=510R/5k1	SOT-323	16ta	-	3a	Pan
6I	-	UNR9118J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=510R/5k1	SS-MiniF	18ta	-	3a	Pan
6Ig	-	FT531Ig	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6J	-	CMPF4391	n-FET	AF, 40V, Idss=50..150mA, Vgs(off)=4..10V, Rds<30Ω, <20ns	SOT-23	16fk	-	3a	Cen
6J	-	DTA143EE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4k7/4k7	SOT-416	16ta	-	3a	Ons
6J	-	FMMV2105	C-diode	Tuning, 30V, 13.5..16.5pF, Q>400	SOT-23	16dc	-	3a	Zx
6J	-	FT531Jh	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6J	-	KIA7033AT	Vdet-IC	3.3V, -Reset OCO	TSM	16vdb	VD6	3f	Kec
6J	-	MMBF4391	n-FET	Sw, 30V, 50mA, 225mA, Rds=30Ω (1mA)	SOT-23	16fj	-	3a	Ons
6J	-	MUN2132	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4k/4k7	SC-59	16ta	-	3a	Mot
6J	-	MUN5132	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4k/4k7	SOT-323	16ta	-	3a	Mot
6J	-	R3131N46EA	Vdet-IC	4.6V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
6Jg	-	FT531Jg	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6K	-	CMPF4392	n-FET	AF, 40V, Idss=25..75mA, Vgs(off)=2..5V, Rds<60Ω, <35ns	SOT-23	16fk	-	3a	Cen
6K	-	DTA143ZE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4k7/47k	SOT-416	16ta	-	3a	Ons
6K	-	FT531Kh	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6K	-	KIA7034AT	Vdet-IC	3.4V, -Reset OCO	TSM	16vdb	VD6	3f	Kec
6K	-	MMBF4392	n-FET	Sw, 30V, 50mA, 225mA, Rds=60Ω (1mA)	SOT-23	16fj	-	3a	Ons
6K	-	MUN2133	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4k7/47k	SC-59	16ta	-	3a	Mot
6K	-	MUN5133	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4k7/47k	SOT-323	16ta	-	3a	Mot
6K	-	UN2119	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=1k/10k	SC-59	16ta	-	3a	Pan
6K	-	UN5119	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=1k/10k	SOT-23	16ta	-	3a	Pan
6K	-	UN9119J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=1k/10k	SS-MiniF	18ta	-	3a	Pan
6K	-	UNR2119	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=1k/10k	SC-59	16ta	-	3a	Pan
6K	-	UNR5119	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=1k/10k	SOT-323	16ta	-	3a	Pan
6K	-	UNR9119J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=1k/10k	SS-MiniF	18ta	-	3a	Pan
6K5	-	TC596702ECB	LVR-IC	LDO, -6.7V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
6Kg	-	FT531Kg	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cq	VR1	3d	Fmd
6Kp	-	BAP64-06	PIN-diode	Dual, RF, 175V, 100mA, 250mW, 0.35pF, 3.8Ω(10mA/100MHz)	SOT-23	16df	-	3a	Phi
6L	-	DTA124XE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/47k	SOT-416	16ta	-	3a	Ons
6L	-	FMMV2107	C-diode	Tuning, 30V, 19.8..24.2pF, Q>350	SOT-23	16dc	-	3a	Zx
6L	-	KIA7035AT	Vdet-IC	3.5V, -Reset OCO	TSM	16vdb	VD6	3f	Kec
6L	-	MUN2134	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	SC-59	16ta	-	3a	Mot
6L	-	MUN5134	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	SOT-323	16ta	-	3a	Mot
6L	-	UN2110	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1=47k	SC-59	16ta	-	3a	Pan
6L	-	UN5110	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1=47k	SOT-23	16ta	-	3a	Pan
6L	-	UN9110J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1=47k	SS-MiniF	18ta	-	3a	Pan
6L	-	UNR2110	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1=47k	SC-59	16ta	-	3a	Pan





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6L	-	UNR5110	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1=47k	SOT-323	16ta	-	3a	Pan
6L	-	UNR9110J	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1=47k	SS-MiniF	18ta	-	3a	Pan
6L5	-	TC596802ECB	LVR-IC	LDO, -6.8V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
6M	-	DTA123JE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=2k2/47k	SOT-416	16ta	-	3a	Ons
6M	-	FMMV2108	C-diode	Tuning, 30V, 24.3..29.7pF, Q>300	SOT-23	16dc	-	3a	Zx
6M	-	KIA7036AT	Vdet-IC	3.6V, -Reset OCO	TSM	16vdb	VD6	3f	Kec
6M	-	MMBF5485	n-FET	RF, LN, 25V, 10mA, 225mW, Up<3V	SOT-23	16fa	-	3a	Nsc
6M	-	UN211D	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R2=10k	SC-59	16ta	-	3a	Pan
6M	-	UN511D	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R2=10k	SOT-23	16ta	-	3a	Pan
6M	-	UN911DJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R2=10k	SS-MiniF	18ta	-	3a	Pan
6M	-	UNR211D	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R2=10k	SC-59	16ta	-	3a	Pan
6M	-	UNR511D	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R2=10k	SOT-323	16ta	-	3a	Pan
6M	-	UNR911DJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R2=10k	SS-MiniF	18ta	-	3a	Pan
6M5	-	TC596902ECB	LVR-IC	LDO, -6.9V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
6N	-	DTA115EE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=100k/100k	SOT-416	16ta	-	3a	Ons
6N	-	FMMV2109	C-diode	Tuning, 30V, 29.3..36.3pF, Q>280	SOT-23	16dc	-	3a	Zx
6N	-	KIA7039AT	Vdet-IC	3.9V, -Reset OCO	TSM	16vdb	VD6	3f	Kec
6N	-	MUN2136	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	SC-59	16ta	-	3a	Mot
6N	-	MUN5136	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	SOT-323	16ta	-	3a	Mot
6N	-	UN211E	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=47k/22k	SC-59	16ta	-	3a	Pan
6N	-	UN511E	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=47k/22k	SOT-23	16ta	-	3a	Pan
6N	-	UN911EJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=47k/22k	SS-MiniF	18ta	-	3a	Pan
6N	-	UNR211E	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=47k/22k	SC-59	16ta	-	3a	Pan
6N	-	UNR511E	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=47k/22k	SOT-323	16ta	-	3a	Pan
6N	-	UNR911EJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=47k/22k	SS-MiniF	18ta	-	3a	Pan
6O	-	UN211F	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=4k7/10k	SC-59	16ta	-	3a	Pan
6O	-	UN511F	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=4k7/10k	SOT-23	16ta	-	3a	Pan
6O	-	UN911FJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=4k7/10k	SS-MiniF	18ta	-	3a	Pan
6O	-	UNR211F	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=4k7/10k	SC-59	16ta	-	3a	Pan
6O	-	UNR511F	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=4k7/10k	SOT-323	16ta	-	3a	Pan
6O	-	UNR911FJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=4k7/10k	SS-MiniF	18ta	-	3a	Pan
6P	-	BCX71HR	Si-pnp	GP, 45V, 200mA, 330mW, B=180..310, >180MHz	SOT-23	16ta	-	3a	Zx
6P	-	BCX71RH	Si-pnp	GP, 45V, 200mA, 250mW, B=180..310, >100MHz	SOT-23	16ta	-	3a	Zx
6P	-	DTA144WE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/22k	SOT-416	16ta	-	3a	Ons
6P	-	KIA7042AT	Vdet-IC	4.2V, -Reset OCO	TSM	16vdb	VD6	3f	Kec
6P	-	MUN2137	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	SC-59	16ta	-	3a	Mot
6P	-	MUN5137	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	SOT-323	16ta	-	3a	Mot
6P	-	UN211H	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=2k2/10k	SC-59	16ta	-	3a	Pan
6P	-	UN511K	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=10k/4k7	SOT-23	16ta	-	3a	Pan
6P	-	UN911KJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=10k/4k7	SS-MiniF	18ta	-	3a	Pan
6P	-	UNR211H	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=2k2/10k	SC-59	16ta	-	3a	Pan
6P	-	UNR511K	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=10k/4k7	SOT-323	16ta	-	3a	Pan
6P	-	UNR911KJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=10k/4k7	SS-MiniF	18ta	-	3a	Pan
6p3	-	1PS70SB40	Si-diode	Schottky, Sw, Fast, 40V, 120mA, <100ps	SOT-323	16dc	-	3a	NxH
6p4	-	1PS70SB44	Si-diode	Dual, SBD, Sw, Fast, 40V, 120mA, <100ps	SOT-323	16dl	-	3a	NxH
6p5	-	1PS70SB45	Si-diode	Dual, SBD, Sw, Fast, 40V, 120mA, <100ps	SOT-323	16dg	-	3a	NxH
6p6	-	1PS70SB46	Si-diode	Dual, SBD, Sw, Fast, 40V, 120mA, <100ps	SOT-323	16df	-	3a	NxH
6Q	-	UN211L	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=4k7/4k7	SC-59	16ta	-	3a	Pan
6Q	-	UN511L	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=4k7/4k7	SOT-23	16ta	-	3a	Pan
6Q	-	UN911LJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=4k4/4k7	SS-MiniF	18ta	-	3a	Pan
6Q	-	UNR211L	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=4k7/4k7	SC-59	16ta	-	3a	Pan
6Q	-	UNR511L	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=4k7/4k7	SOT-323	16ta	-	3a	Pan
6Q	-	UNR911LJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=4k4/4k7	SS-MiniF	18ta	-	3a	Pan
6R	-	FMMV2101	C-diode	Tuning, 30V, 6.1../7.5pF, Q>450	SOT-23	16dc	-	3a	Zx
6R	-	KIA7045AT	Vdet-IC	4.5V, -Reset OCO	TSM	16vdb	VD6	3f	Kec
6R	-	SRA2206E	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=4.7k/47k	SOT-523	16ta	-	3a	Auk
6R	-	SRA2206EF	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=4.7k/47k	SOT-523F	18ta	-	3a	Auk
6R	-	SRA2206U	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/47k	SOT-323	16ta	-	3a	Auk
6R	-	SRA2206UF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/47k	SOT-323F	18ta	-	3a	Auk
6T	-	BCW68RG	Si-pnp	AF, Sw, 60V, 800mA, 350mW, B>160, >100MHz	SOT-23	16ta	-	3a	Zx
6T	-	DTA144T	Si-pnp-Digi	Sw, 50V, 100mA, 230mW, 250MHz, R1=47k	SC-59	16ta	-	3a	Ons
6T	-	MUN2140	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=47k	SC-59	16ta	-	3a	Mot
6t3	-	1PS70SB40	Si-diode	Schottky, Sw, Fast, 40V, 120mA, <100ps	SOT-323	16dc	-	3a	NxM
6t4	-	1PS70SB44	Si-diode	Dual, SBD, Sw, Fast, 40V, 120mA, <100ps	SOT-323	16dl	-	3a	NxM
6t5	-	1PS70SB45	Si-diode	Dual, SBD, Sw, Fast, 40V, 120mA, <100ps	SOT-323	16dg	-	3a	NxM
6t6	-	1PS70SB46	Si-diode	Dual, SBD, Sw, Fast, 40V, 120mA, <100ps	SOT-323	16df	-	3a	NxM
6V	-	BCW65CR	Si-npn	AF, 60V, 800mA, 330mW, B=250..630, >100MHz	SOT-23	16te	-	3a	Zx
6V0	-	CHPZ6V0PT	Z-diode	Dual, 5.6..6.4V, Izt=5mA, Zzt=20Ω, 350mW	SOT-23	16df	-	3a	Chm
6V2	-	CHPZ6V2PT	Z-diode	Dual, 5.8..6.6V, Izt=5mA, Zzt=10Ω, 350mW	SOT-23	16df	-	3a	Chm
6V2	-	PZM6.2NB	Z-diode	6.2V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6V8	-	CHPZ6V8PT	Z-diode	Dual, 6.4..7.2V, Izt=5mA, Zzt=15Ω, 350mW	SOT-23	16df	-	3a	Chm
6V8	-	PZM6.8NB	Z-diode	6.8V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
6W	-	BCW67CR	Si-pnp	AF, Sw, 45V, 800mA, 330mW, B=250..630, >100MHz	SOT-23	16ta	-	3a	Zx
6W-	-	BAP50-04W	PIN-diode	Dual, RF, 50V, 50mA, 500mW, 0.3pF, 3Ω(10mA/100MHz)	SOT-323	16dl	-	3a	Phi
6W3	-	1PS70SB40	Si-diode	Schottky, Sw, Fast, 40V, 120mA, <100ps	SOT-323	16dc	-	3a	PhC
6W4	-	1PS70SB44	Si-diode	Dual, SBD, Sw, Fast, 40V, 120mA, <100ps	SOT-323	16dl	-	3a	PhC
6W5	-	1PS70SB45	Si-diode	Dual, SBD, Sw, Fast, 40V, 120mA, <100ps	SOT-323	16dg	-	3a	NxC
6W6	-	1PS70SB46	Si-diode	Dual, SBD, Sw, Fast, 40V, 120mA, <100ps	SOT-323	16df	-	3a	PhC
6X	-	UNR311A	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 80MHz, R1/R2=100k/100k	SSSMini3	18ta	-	3a	Pan
6X	-	UNR911AJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=100k/100k	SS-MiniF	18ta	-	3a	Pan
6Y	-	UNR911BJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1=100k	SS-MiniF	18ta	-	3a	Pan
6Z	-	UNR911CJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R2=47k	SS-MiniF	18ta	-	3a	Pan
6Z2	-	CZ1W6V2	Z-diode	6.2V±5%, Izt=41mA, 600mW	SOT-23	16dc	-	3a	Cdi
6Z8	-	CZ1W6V8	Z-diode	6.8V±5%, Izt=37mA, 600mW	SOT-23	16dc	-	3a	Cdi
7	cr	ELM7545NEB	Vdet-IC	4.5V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
7	cs	ELM7545CEB	Vdet-IC	4.5V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
7.5	-	TZT7.5W	Z-diode	7.0..7.90V, Izt=5mA, Zzt=23Ω, 200mW	SOT-23	16dc	-	3a	Ttr
7.5	-	Z02W7.5V	Z-diode	7.0..7.90V, Izt=5mA, Zzt=23Ω, 200mW	SOT-23	16dc	-	3f	Kec
7.5A	-	MAZ3075WA	Z-diode	Dual, 7.5V, If=100mA, Zzt=15Ω, 200mW	SC-59	16df	-	3a	Pan
7.5G	-	ZD7.5G-AE3	Z-diode	7.5V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
7.5H	-	BZX84C7V5-V	Z-diode	7.23..7.66V, Izt=5mA, Zzt=23Ω, 300mW	SOT-23	16dc	-	3f	Kec
7.5H	-	MAZ3075-H	Z-diode	7..7.9V, If=100mA, Zzt=15Ω, 200mW	SC-59	16dc	-	3a	Pan
7.5K	-	MAZ3075WK	Z-diode	Dual, 7.5V, If=100mA, Zzt=15Ω, 200mW	SC-59	16dg	-	3a	Pan
7.5L	-	MAZ3075-L	Z-diode	7..7.9V, If=100mA, Zzt=15Ω, 200mW	SC-59	16dc	-	3a	Pan
7.5L	-	ZD7.5L-AE3	Z-diode	7.5V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
7.5M	-	MAZ3075-M	Z-diode	7..7.9V, If=100mA, Zzt=15Ω, 200mW	SC-59	16dc	-	3a	Pan
7.5X	-	TZT7.5XW	Z-diode	7.0..7.43V, Izt=5mA, Zzt=23Ω, 200mW	SOT-23	16dc	-	3a	Ttr
7.5X	-	Z02W7.5VX	Z-diode	7.0..7.43V, Izt=5mA, Zzt=23Ω, 200mW	SOT-23	16dc	-	3f	Kec
7.5Y	-	TZT7.5YW	Z-diode	7.23..7.66V, Izt=5mA, Zzt=23Ω, 200mW	SOT-23	16dc	-	3a	Ttr
7.5Y	-	Z02W7.5VY	Z-diode	7.23..7.66V, Izt=5mA, Zzt=23Ω, 200mW	SOT-23	16dc	-	3f	Kec
7.5Z	-	TZT7.5ZW	Z-diode	7.46..7.90V, Izt=5mA, Zzt=23Ω, 200mW	SOT-23	16dc	-	3a	Ttr
7.5Z	-	Z02W7.5VZ	Z-diode	7.46..7.90V, Izt=5mA, Zzt=23Ω, 200mW	SOT-23	16dc	-	3f	Kec
7•5X	-	02CZ7.5-X	Z-diode	7..7.43V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
7•5Y	-	02CZ7.5-Y	Z-diode	7.23..7.66V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
7•5Z	-	02CZ7.5-Z	Z-diode	7.46..7.9V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
7•8X	-	02CZ8.2-X	Z-diode	7.7..8.16V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
7•8Y	-	02CZ8.2-Y	Z-diode	7.96..8.43V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
7•8Z	-	02CZ8.2-Z	Z-diode	8.23..8.7V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
70	-	AP8822N-40GA	Vdet-IC	4.0V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
70	-	AP8822N-40GT	Vdet-IC	4.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
70	-	AP8822N-40PA	Vdet-IC	4.0V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
70	-	AP8822N-40PT	Vdet-IC	4.0V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
70	cq	ELM7520NBB	Vdet-IC	2.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
70	ct	ELM7520CBB	Vdet-IC	2.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
7-0	-	1PS70SB10	Si-diode	Schottky, Sw, Fast, 30V, 200mA, <5ns	SOT-323	16dc	-	3a	PhH
702	-	2N7002	n-MOSFET	TMOS, 60V, 300mA, 830mW, 5Ω(500mA), 10/15ns	SOT-23	16fh	-	3a	Phi
702E	-	2N7002E	n-MOSFET	TMOS, 60V, 385mA, 830mW, 3Ω(500mA), 10/15ns	SOT-23	16fh	-	3a	Phi
702F	-	2N7002F	n-MOSFET	TMOS, 60V, 475mA, 830mW, 2Ω(500mA), 10/15ns	SOT-23	16fh	-	3a	Phi
702K	-	2N7002K	n-MOSFET	TMOS, 60V, 340mA, 830mW, 3.9Ω(500mA), 10/15ns	SOT-23	16fh	-	3a	Phi
702KA	-	2N7002KA	n-MOSFET	TMOS, 60V, 320mA, 830mW, 4.4Ω(500mA), 10/15ns	SOT-23	16fh	-	3a	Phi
702T	-	2N7002T	n-MOSFET	TMOS, 60V, 300mA, 830mW, 5Ω(500mA), 10/15ns	SOT-23	16fh	-	3a	Phi
70B	-	MMBZ5270BPT	Z-diode	86.45..95.55V, Izt=1.4mA, Zzt=400Ω, 225mW	SOT-23	16dc	-	3a	Chm
70B	-	MMCZ5270BPT	Z-diode	86.45..95.55V, Izt=1.4mA, Zzt=400Ω, 225mW	SOT-346	16dc	-	3a	Chm
70S	-	MMBZ5270SPT	Z-diode	89.18..92.82V, Izt=1.4mA, Zzt=400Ω, 225mW	SOT-23	16dc	-	3a	Chm
70S	-	MMCZ5270SPT	Z-diode	89.18..92.82V, Izt=1.4mA, Zzt=400Ω, 225mW	SOT-346	16dc	-	3a	Chm
70T	-	TK71570AS	LVR-IC	LDO, 7V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
71	-	AP8822N-41GA	Vdet-IC	4.1V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
71	-	AP8822N-41GT	Vdet-IC	4.1V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
71	-	AP8822N-41PA	Vdet-IC	4.1V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
71	-	AP8822N-41PT	Vdet-IC	4.1V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
71	-	CHDTA114TMPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=10k	SOT-723	18ta	-	3a	Chm
71	cq	ELM7521NBB	Vdet-IC	2.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
71	ct	ELM7521CBB	Vdet-IC	2.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
712	-	NDS7002A	n-MOSFET	V-MOS, 60V, 0.28A, <2Ω(0.5A)	SOT-23	16fh	-	3a	Nsc
717	-	FMMT717	Si-pnp	Sw, Lo-sat, 12V, 2.5A, 0.625W, 70/130ns	SOT-23	16ta	-	3a	Zx
718	-	FMMT718	Si-pnp	Sw, Lo-sat, 20V, 1.5A, 0.625W, 40/670ns	SOT-23	16ta	-	3a	Zx
72	-	1PS70SB20	Si-diode	Schottky, Sw, U-Fast, 40V, 500mA, Vf<0.55V(500mA)	SOT-323	16dc	-	3a	Phi
72	-	2N7002	n-MOSFET	TMOS, 60V, 250mA, 310mW, <7.5Ω(500mA), 5/25ns	SOT-23	16fh	-	3a	Six
72	-	2N7002T	n-MOSFET	TMOS, 60V, 150mA, 200mW, <7.5Ω(500mA), 7/11ns	SOT-523	16fh	-	3a	Trs
72	-	AP8822N-42GA	Vdet-IC	4.2V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
72	-	AP8822N-42GT	Vdet-IC	4.2V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
72	-	AP8822N-42PA	Vdet-IC	4.2V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
72	-	AP8822N-42PT	Vdet-IC	4.2V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
72	-	CHDTA115TMPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=100k	SOT-723	18ta	-	3a	Chm
72	cq	ELM7522NBB	Vdet-IC	2.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
72	ct	ELM7522CBB	Vdet-IC	2.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
720	-	FMMT720	Si-pnp	Sw, Lo-sat, 40V, 1.5A, 625mW, B=300..450, >190MHz	SOT-23	16ta	-	3a	Zx
722	-	FMMT722	Si-pnp	Sw, Lo-sat, 70V, 1.5A, 625mW, B=300..450, >200MHz	SOT-23	16ta	-	3a	Zx
723	-	FMMT723	Si-pnp	Sw, Lo-sat, 100V, -1A, 625imW, B=300..450.>200MHz	SOT-23	16ta	-	3a	Zx
723	-	S7123SF	Vdet-IC	2.3V±2%, +Reset Open collector output	SOT-23F	18vdb	VD6	3b	Auk
725	-	MMBZ5225-V-G	Z-diode	3V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3a	Vs
726	-	MMBZ5226-V-G	Z-diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 225mW	SOT-23	16dc	-	3a	Vs
727	-	MMBZ5227-V-G	Z-diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 225mW	SOT-23	16dc	-	3a	Vs
728	-	MMBZ5228-V-G	Z-diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 225mW	SOT-23	16dc	-	3a	Vs
729	-	MMBZ5229-V-G	Z-diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 225mW	SOT-23	16dc	-	3a	Vs
72A	-	KIA7219S	Vdet-IC	1.9V±2%, -Reset OCO	SOT-23	16vdy	VD6	3f	Kec
72B	-	KIA7221S	Vdet-IC	2.1V±2%, -Reset OCO	SOT-23	16vdy	VD6	3f	Kec
72C	-	KIA7223S	Vdet-IC	2.3V±2%, -Reset OCO	SOT-23	16vdy	VD6	3f	Kec
72D	-	KIA7225S	Vdet-IC	2.5V±2%, -Reset OCO	SOT-23	16vdy	VD6	3f	Kec
72E	-	KIA7227S	Vdet-IC	2.7V±2%, -Reset OCO	SOT-23	16vdy	VD6	3f	Kec
72F	-	KIA7229S	Vdet-IC	2.9V±2%, -Reset OCO	SOT-23	16vdy	VD6	3f	Kec
72G	-	KIA7231S	Vdet-IC	3.1V±2%, -Reset OCO	SOT-23	16vdy	VD6	3f	Kec
72H	-	KIA7232S	Vdet-IC	3.2V±2%, -Reset OCO	SOT-23	16vdy	VD6	3f	Kec
72J	-	KIA7233S	Vdet-IC	3.3V±2%, -Reset OCO	SOT-23	16vdy	VD6	3f	Kec
72K	-	KIA7234S	Vdet-IC	3.4V±2%, -Reset OCO	SOT-23	16vdy	VD6	3f	Kec
72L	-	KIA7235S	Vdet-IC	3.5V±2%, -Reset OCO	SOT-23	16vdy	VD6	3f	Kec
72M	-	KIA7236S	Vdet-IC	3.6V±2%, -Reset OCO	SOT-23	16vdy	VD6	3f	Kec
72N	-	KIA7239S	Vdet-IC	3.9V±2%, -Reset OCO	SOT-23	16vdy	VD6	3f	Kec
72P	-	KIA7242S	Vdet-IC	4.2V±2%, -Reset OCO	SOT-23	16vdy	VD6	3f	Kec
72R	-	KIA7245S	Vdet-IC	4.5V±2%, -Reset OCO	SOT-23	16vdy	VD6	3f	Kec
73	-	2SC5005-FB	Si-npn	UHF-Mix/Osc, 20V, 30mA, 100mW, 5.5GHz, B=60..120	SOT-23	16ta	-	3a	Nec
73	-	AP8822N-43GA	Vdet-IC	4.3V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
73	-	AP8822N-43GT	Vdet-IC	4.3V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
73	-	AP8822N-43PA	Vdet-IC	4.3V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
73	-	AP8822N-43PT	Vdet-IC	4.3V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
73	-	BAS70	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dc	-	3c	Sec
73	-	BAS70-00V	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dc	-	3g	Vs
73	-	CHDTA124TMPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=22k	SOT-723	18ta	-	3a	Chm
73	cq	ELM7523NBB	Vdet-IC	2.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
73	ct	ELM7523CBB	Vdet-IC	2.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
73-	-	BAS70	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dc	-	3a	NxH
73-	-	BAS70W	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dc	-	3a	NxH
730	-	MMBZ5230-V-G	Z-diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 225mW	SOT-23	16dc	-	3a	Vs
731	-	MMBZ5231-V-G	Z-diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 225mW	SOT-23	16dc	-	3a	Vs
732	-	MMBZ5232-V-G	Z-diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 225mW	SOT-23	16dc	-	3a	Vs
733	-	MMBZ5233-V-G	Z-diode	6V±5%, Izt=20mA, Zzt=7Ω, 225mW	SOT-23	16dc	-	3a	Vs
734	-	MMBZ5234-V-G	Z-diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 225mW	SOT-23	16dc	-	3a	Vs
735	-	MMBZ5235-V-G	Z-diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 225mW	SOT-23	16dc	-	3a	Vs
736	-	MMBZ5236-V-G	Z-diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 225mW	SOT-23	16dc	-	3a	Vs
737	-	MMBZ5237-V-G	Z-diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 225mW	SOT-23	16dc	-	3a	Vs
738	-	MMBZ5238-V-G	Z-diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 225mW	SOT-23	16dc	-	3a	Vs
739	-	MMBZ5239-V-G	Z-diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 225mW	SOT-23	16dc	-	3a	Vs
73p	-	BAS70	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dc	-	3a	NxH
73p	-	BAS70W	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dc	-	3a	NxH
73s	-	BAS70	Si-diode	SBD, GP, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dc	-	3c	Inf
73t	-	BAS70	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dc	-	3a	NxM
73t	-	BAS70W	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dc	-	3a	NxM
73W	-	BAS70	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dc	-	3a	NxC
73W	-	BAS70W	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dc	-	3a	NxC
74	-	AP8822N-44GA	Vdet-IC	4.4V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
74	-	AP8822N-44GT	Vdet-IC	4.4V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
74	-	AP8822N-44PA	Vdet-IC	4.4V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
74	-	AP8822N-44PT	Vdet-IC	4.4V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
74	-	BAS70-04	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dl	-	3c	Sec
74	-	BAS70-04V	Si-diode	Dual, SBD, 70V, 200mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dl	-	3g	Vs
74	-	CHDTA143TMPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=4.7k	SOT-723	18ta	-	3a	Chm
74	-	DTA114WE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10k/4k7	SOT-416	16ta	-	3a	Rhm
74	-	DTA114WKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/4k7	SOT-346	16ta	-	3a	Rhm
74	-	DTA114WUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/4k7	UMT3	16ta	-	3a	Rhm
74	cq	ELM7524NBB	Vdet-IC	2.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
74	ct	ELM7524CBB	Vdet-IC	2.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
7-4	-	1PS70SB14	Si-diode	Dual, Schottky, Sw, Fast, 30V, 200mA, <5ns	SOT-323	16dl	-	3a	PhH
74-	-	BAS70-04	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dl	-	3a	NxH
74-	-	BAS70-04W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dl	-	3a	NxH
740	-	MMBZ5240-V-G	Z-diode	10V±5%, Izt=20mA, Zzt=17Ω, 225mW	SOT-23	16dc	-	3a	Vs
741	-	MMBZ5241-V-G	Z-diode	11V±5%, Izt=20mA, Zzt=22Ω, 225mW	SOT-23	16dc	-	3a	Vs
742	-	MMBZ5242-V-G	Z-diode	12V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3a	Vs
743	-	MMBZ5243-V-G	Z-diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 225mW	SOT-23	16dc	-	3a	Vs
744	-	MMBZ5244-V-G	Z-diode	14V±5%, Izt=9mA, Zzt=15Ω, 225mW	SOT-23	16dc	-	3a	Vs
745	-	MMBZ5245-V-G	Z-diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 225mW	SOT-23	16dc	-	3a	Vs
746	-	MMBZ5246-V-G	Z-diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 225mW	SOT-23	16dc	-	3a	Vs
747	-	MMBZ5247-V-G	Z-diode	17V±5%, Izt=7.4mA, Zzt=19Ω, 225mW	SOT-23	16dc	-	3a	Vs
748	-	MMBZ5248-V-G	Z-diode	18V±5%, Izt=7mA, Zzt=21Ω, 225mW	SOT-23	16dc	-	3a	Vs
749	-	MMBZ5249-V-G	Z-diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 225mW	SOT-23	16dc	-	3a	Vs
74p	-	BAS70-04	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dl	-	3a	NxH
74p	-	BAS70-04W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dl	-	3a	NxH
74s	-	BAS70-04	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dl	-	3c	Inf
74s	-	BAS70-04T	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SC-75	16dl	-	3a	Inf
74s	-	BAS70-04W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dl	-	3a	Inf
74t	-	BAS70-04	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dl	-	3a	NxM
74t	-	BAS70-04W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dl	-	3a	NxM
74W	-	BAS70-04	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dl	-	3a	NxC
74W	-	BAS70-04W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dl	-	3a	NxC
75	-	AP8822N-45GA	Vdet-IC	4.5V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
75	-	AP8822N-45GT	Vdet-IC	4.5V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
75	-	AP8822N-45PA	Vdet-IC	4.5V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
75	-	AP8822N-45PT	Vdet-IC	4.5V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
75	-	BAS70-05	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dg	-	3c	Sec
75	-	BAS70-05V	Si-diode	Dual, SBD, 70V, 200mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dg	-	3g	Vs
75	-	CHDTA144TMPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=47k	SOT-723	18ta	-	3a	Chm
75	cq	ELM7525NBB	Vdet-IC	2.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
75	ct	ELM7525CBB	Vdet-IC	2.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
7-5	-	1PS70SB15	Si-diode	Dual, Schottky, Sw, Fast, 30V, 200mA, <5ns	SOT-323	16dg	-	3a	PhH
75-	-	BAS70-05	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dg	-	3a	NxH
75-	-	BAS70-05W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dg	-	3a	NxH
750	-	HZM7.5NB	Z-diode	7.06..7.84V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
750	-	MMBZ5250-V-G	Z-diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 225mW	SOT-23	16dc	-	3a	Vs
751	-	HZM7.5NB1	Z-diode	7.06..7.36V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
751	-	MMBZ5251-V-G	Z-diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 225mW	SOT-23	16dc	-	3a	Vs
751	-	PZM7.5NB1	Z-diode	7.5V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
752	-	HZM7.5NB2	Z-diode	7.28..7.6V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
752	-	MMBZ5252-V-G	Z-diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 225mW	SOT-23	16dc	-	3a	Vs
752	-	PZM7.5NB2	Z-diode	7.5V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
753	-	HZM7.5NB3	Z-diode	7.52..7.84V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
753	-	MMBZ5253-V-G	Z-diode	25V±5%, Izt=5mA, Zzt=35Ω, 225mW	SOT-23	16dc	-	3a	Vs
753	-	PZM7.5NB3	Z-diode	7.5V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
754	-	MMBZ5254-V-G	Z-diode	27V±5%, Izt=4.6mA, Zzt=41Ω, 225mW	SOT-23	16dc	-	3a	Vs
755	-	MMBZ5255-V-G	Z-diode	28V±5%, Izt=4.5mA, Zzt=44Ω, 225mW	SOT-23	16dc	-	3a	Vs
756	-	MMBZ5256-V-G	Z-diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 225mW	SOT-23	16dc	-	3a	Vs
757	-	MMBZ5257-V-G	Z-diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 225mW	SOT-23	16dc	-	3a	Vs
758	-	MMBZ5258-V-G	Z-diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 225mW	SOT-23	16dc	-	3a	Vs
759	-	MMBZ5259-V-G	Z-diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 225mW	SOT-23	16dc	-	3a	Vs
75p	-	BAS70-05	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dg	-	3a	NxH
75p	-	BAS70-05W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dg	-	3a	NxH
75s	-	BAS70-05	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dg	-	3c	Inf
75s	-	BAS70-05W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dg	-	3c	Inf
75t	-	BAS70-05	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dg	-	3a	NxM
75t	-	BAS70-05W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dg	-	3a	NxM
75V	-	PZM75NB	Z-diode	75V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
75W	-	BAS70-05	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dg	-	3a	NxC
75W	-	BAS70-05W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dg	-	3a	NxC
76	-	AP8822N-46GA	Vdet-IC	4.6V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
76	-	AP8822N-46GT	Vdet-IC	4.6V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
76	-	AP8822N-46PA	Vdet-IC	4.6V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
76	-	AP8822N-46PT	Vdet-IC	4.6V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
76	-	BAS70-06	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16df	-	3c	Sec
76	-	BAS70-06V	Si-diode	Dual, SBD, 70V, 200mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16df	-	3g	Vs
76	-	CHDTA124GMPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R2=22k	SOT-723	18ta	-	3a	Chm
76	-	DTA144WE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=47k/22k	SOT-416	16ta	-	3a	Rhm
76	-	DTA144WKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/22k	SOT-346	16ta	-	3a	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
76	-	DTA144WUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/22k	UMT3	16ta	-	3a	Rhm
76	cq	ELM7526NBB	Vdet-IC	2.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
76	ct	ELM7526CBB	Vdet-IC	2.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
7-6	-	1PS70SB16	Si-diode	Dual, Schottky, Sw, Fast, 30V, 200mA, <5ns	SOT-323	16df	-	3a	PhH
76-	-	BAS70-06	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16df	-	3a	NxH
76-	-	BAS70-06W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16df	-	3a	NxH
760	-	MMBZ5260-V-G	Z-diode	43V±5%, Izt=3mA, Zzt=93Ω, 225mW	SOT-23	16dc	-	3a	Vs
761	-	MMBZ5261-V-G	Z-diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 225mW	SOT-23	16dc	-	3a	Vs
762	-	MMBZ5262-V-G	Z-diode	51V±5%, Izt=2.5mA, Zzt=125Ω, 225mW	SOT-23	16dc	-	3a	Vs
763	-	MMBZ5263-V-G	Z-diode	56V±5%, Izt=2.2mA, Zzt=150Ω, 225mW	SOT-23	16dc	-	3a	Vs
764	-	MMBZ5264-V-G	Z-diode	60V±5%, Izt=2.1mA, Zzt=170Ω, 225mW	SOT-23	16dc	-	3a	Vs
765	-	MMBZ5265-V-G	Z-diode	62V±5%, Izt=2mA, Zzt=185Ω, 225mW	SOT-23	16dc	-	3a	Vs
766	-	MMBZ5266-V-G	Z-diode	68V±5%, Izt=1.8mA, Zzt=230Ω, 225mW	SOT-23	16dc	-	3a	Vs
767	-	MMBZ5267-V-G	Z-diode	75V±5%, Izt=1.7mA, Zzt=270Ω, 225mW	SOT-23	16dc	-	3a	Vs
76p	-	BAS70-06	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16df	-	3a	NxH
76p	-	BAS70-06W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16df	-	3a	NxH
76s	-	BAS70-06	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16df	-	3c	Inf
76s	-	BAS70-06W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16df	-	3c	Inf
76t	-	BAS70-06	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16df	-	3a	NxM
76t	-	BAS70-06W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16df	-	3a	NxM
76W	-	BAS70-06	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16df	-	3a	NxC
76W	-	BAS70-06W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16df	-	3a	NxC
77	-	2SC5004-FB	Si-npn	UHF-Mix/Osc, 20V, 60mA, 100mW, B=60..120, 5GHz	SOT-323	16ta	-	3a	Nec
77	-	AP8822N-47GA	Vdet-IC	4.7V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
77	-	AP8822N-47GT	Vdet-IC	4.7V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
77	-	AP8822N-47PA	Vdet-IC	4.7V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
77	-	AP8822N-47PT	Vdet-IC	4.7V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
77	-	CHDTA114GMPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R2=10k	SOT-723	18ta	-	3a	Chm
77	cq	ELM7527NBB	Vdet-IC	2.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
77	ct	ELM7527CBB	Vdet-IC	2.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
-77	-	PDTA124XU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	SOT-323	16ta	-	3a	NxH
77A	-	KIA7719S	Vdet-IC	1.9V±2%, -Reset OCO	SOT-23	16vdc	VD6	3f	Kec
77B	-	KIA7721S	Vdet-IC	2.1V±2%, -Reset OCO	SOT-23	16vdc	VD6	3f	Kec
77C	-	KIA7723S	Vdet-IC	2.3V±2%, -Reset OCO	SOT-23	16vdc	VD6	3f	Kec
77D	-	KIA7725S	Vdet-IC	2.5V±2%, -Reset OCO	SOT-23	16vdc	VD6	3f	Kec
77E	-	KIA7727S	Vdet-IC	2.7V±2%, -Reset OCO	SOT-23	16vdc	VD6	3f	Kec
77F	-	KIA7729S	Vdet-IC	2.9V±2%, -Reset OCO	SOT-23	16vdc	VD6	3f	Kec
77G	-	KIA7731S	Vdet-IC	3.1V±2%, -Reset OCO	SOT-23	16vdc	VD6	3f	Kec
77H	-	KIA7732S	Vdet-IC	3.2V±2%, -Reset OCO	SOT-23	16vdc	VD6	3f	Kec
77J	-	KIA7733S	Vdet-IC	3.3V±2%, -Reset OCO	SOT-23	16vdc	VD6	3f	Kec
77K	-	KIA7734S	Vdet-IC	3.4V±2%, -Reset OCO	SOT-23	16vdc	VD6	3f	Kec
77L	-	KIA7735S	Vdet-IC	3.5V±2%, -Reset OCO	SOT-23	16vdc	VD6	3f	Kec
77M	-	KIA7736S	Vdet-IC	3.6V±2%, -Reset OCO	SOT-23	16vdc	VD6	3f	Kec
77N	-	KIA7739S	Vdet-IC	3.9V±2%, -Reset OCO	SOT-23	16vdc	VD6	3f	Kec
77P	-	KIA7742S	Vdet-IC	4.2V±2%, -Reset OCO	SOT-23	16vdc	VD6	3f	Kec
77R	-	KIA7745S	Vdet-IC	4.5V±2%, -Reset OCO	SOT-23	16vdc	VD6	3f	Kec
78	-	AP8822N-48GA	Vdet-IC	4.8V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
78	-	AP8822N-48GT	Vdet-IC	4.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
78	-	AP8822N-48PA	Vdet-IC	4.8V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
78	-	AP8822N-48PT	Vdet-IC	4.8V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
78	-	CHDTA144GMPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R2=47k	SOT-723	18ta	-	3a	Chm
78	cq	ELM7528NBB	Vdet-IC	2.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
78	ct	ELM7528CBB	Vdet-IC	2.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
79	-	AP8822N-49GA	Vdet-IC	4.9V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
79	-	AP8822N-49GT	Vdet-IC	4.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
79	-	AP8822N-49PA	Vdet-IC	4.9V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
79	-	AP8822N-49PT	Vdet-IC	4.9V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
79	cq	ELM7529NBB	Vdet-IC	2.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
79	ct	ELM7529CBB	Vdet-IC	2.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
7A	-	MMBR901	Si-npn	UHF, 25V, 30mA, 300mW, B=30..200, 4GHz	SOT-23	16ta	-	3a	Mot
7A	-	R3131N17EC	Vdet-IC	1.7V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
7A	-	UN2121	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=2k2/2k2	SC-59	16ta	-	3a	Pan
7A	-	UNR2121	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=2k2/2k2	SC-59	16ta	-	3a	Pan
7A5	-	PZM7.5NB2A	Z-diode	Dual, 7.5V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
7A5	-	TC597002ECB	LVR-IC	LDO, -7.0V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
7Ap	-	MMBT3904	Si-npn	GP, 60V, 200mA, 250mW, B= 100..300, >300MHz	SOT-23	16ta	-	3a	PhH
7At	-	MMBT3904	Si-npn	GP, 60V, 200mA, 250mW, B= 100..300, >300MHz	SOT-23	16ta	-	3a	PhM
7AW	-	MMBT3904	Si-npn	GP, 60V, 200mA, 250mW, B= 100..300, >300MHz	SOT-23	16ta	-	3a	PhC
7B	-	MMBR920	Si-npn	UHF, 20V, 35mA, 268mW, B=25..250, 4.5GHz	SOT-23	16ta	-	3a	Mot
7B	-	R3131N27EC	Vdet-IC	2.7V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7B	-	UN2122	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=4k4/4k7	SC-59	16ta	-	3a	Pan
7B	-	UNR2122	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=4k4/4k7	SC-59	16ta	-	3a	Pan
7B5	-	TC597102ECB	LVR-IC	LDO, -7.1V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
7Bp	-	MMBT3906	Si-pnp	Sw, AF, 60/40V, 100mA, 250mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	PhH
7Bt	-	MMBT3906	Si-pnp	Sw, AF, 60/40V, 100mA, 250mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	PhM
7BW	-	MMBT3906	Si-pnp	Sw, AF, 60/40V, 100mA, 250mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	PhC
7C	-	BAS70T	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-523	16dc	-	3b	Di
7C	-	MMBR930	Si-npn	UHF, 15V, 35mA, 150mW, B=50..150, 5.5GHz	SOT-23	16ta	-	3a	Mot
7C	-	R3131N37EC	Vdet-IC	3.7V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
7C	-	UN2123	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=10k/10k	SC-59	16ta	-	3a	Pan
7C	-	UNR2123	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=10k/10k	SC-59	16ta	-	3a	Pan
7C	-	YTS4123	Si-npn	GP, 40V, 200mA, 350mW B=50..150, >250MHz	SOT-23	16ta	-	3a	Tos
7C5	-	TC597202ECB	LVR-IC	LDO, -7.2V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
7Cp	-	MMBT2222A	Si-npn	GP, 75V, 800mA, 250mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	PhH
7Ct	-	MMBT2222A	Si-npn	GP, 75V, 800mA, 250mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	PhM
7CW	-	MMBT2222A	Si-npn	GP, 75V, 800mA, 250mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	PhC
7D	-	BAS70-04T	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-523	16df	-	3b	Di
7D	-	FT532Dh	LVR-IC	LDO, 1.8V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
7D	-	HD4A	C-diode	Dual, 35V, 100mA, Vf<1V, Cd<4pF, <6ns	SOT-23	16df	-	3a	Zx
7D	-	MMBR931	Si-npn	UHF, 10V, 5mA, 150mW, B=50..150, 3GHz	SOT-23	16ta	-	3a	Mot
7D	-	R3131N47EC	Vdet-IC	4.7V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
7D	-	UN2124	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=2k2/10k	SC-59	16ta	-	3a	Pan
7D	-	UNR2124	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=2k2/10k	SC-59	16ta	-	3a	Pan
7D5	-	TC597302ECB	LVR-IC	LDO, -7.3V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
7Dg	-	FT532Dg	LVR-IC	LDO, 1.8V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
7Dp	-	MMBTA42	Si-npn	Vid, 300V, 100mA, 250mW, B>25, >50MHz	SOT-23	16ta	-	3a	PhH
7Dt	-	MMBTA42	Si-npn	Vid, 300V, 100mA, 250mW, B>25, >50MHz	SOT-23	16ta	-	3a	PhM
7DW	-	MMBTA42	Si-npn	Vid, 300V, 100mA, 250mW, B>25, >50MHz	SOT-23	16ta	-	3a	PhC
7E	-	BAS70-05T	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-523	16dl	-	3b	Di
7E	-	FMMTA42R	Si-npn	Vid, 300/300V, 200mA, 330mW, B>40, >50MHz	SOT-23	16te	-	3a	Zx
7E	-	FT532Eh	LVR-IC	LDO, 2.5V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
7E	-	MMBR2060	Si-npn	UHF, 30V, 50mA, 1GHz	SOT-23	16ta	-	3a	Mot
7E	-	YTS2221	Si-npn	GP, 70V, 0.8A, 200mW, B>70, >200MHz	SOT-23	16ta	-	3a	Tos
7E5	-	TC597402ECB	LVR-IC	LDO, -7.4V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
7Eg	-	FT532Eg	LVR-IC	LDO, 2.5V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
7Ep	-	MMBTA92	Si-pnp	Vid, 300V, 100mA, 250mW, B=25, >50MHz	SOT-23	16ta	-	3a	PhH
7Et	-	MMBTA92	Si-pnp	Vid, 300V, 100mA, 250mW, B=25, >50MHz	SOT-23	16ta	-	3a	PhM
7EW	-	MMBTA92	Si-pnp	Vid, 300V, 100mA, 250mW, B=25, >50MHz	SOT-23	16ta	-	3a	PhC
7F	-	2SC6026-Y	Si-npn	GP, Amp, 60V, 100mA, 50mW, >60MHz, B=120..240	fSM	19ta	-	3a	Tos
7F	-	BAS70-06T	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-523	16dg	-	3b	Di
7F	-	FT532Fh	LVR-IC	LDO, 2.7V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
7F	-	MMBR4957	Si-npn	UHF, 30V, 30mA, 1.2GHz	SOT-23	16ta	-	3a	Mot
7F	-	R3131N17EA	Vdet-IC	1.7V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
7F	-	YTS2221A	Si-npn	GP, 75V, 0.8A, 200mW, B>40, >200MHz	SOT-23	16ta	-	3a	Tos
7F5	-	TC597502ECB	LVR-IC	LDO, -7.5V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
7Fg	-	FT532Fg	LVR-IC	LDO, 2.7V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
7G	-	FT532Gh	LVR-IC	LDO, 2.8V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
7G	-	MMBR5031	Si-npn	UHF, 15V, 20mA, 300mW, B=25..300, 1GHz	SOT-23	16ta	-	3a	Mot
7G	-	R3131N27EA	Vdet-IC	2.7V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
-7G	-	PBRN113ET	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxH
7Gg	-	FT532Gg	LVR-IC	LDO, 2.8V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
7H	-	2SC6026-GR	Si-npn	GP, Amp, 60V, 100mA, 50mW, >60MHz, B=200..400	fSM	19ta	-	3a	Tos
7H	-	FT532Hh	LVR-IC	LDO, 2.85V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
7H	-	KST5179	Si-npn	GP, 20V, 50mA, 350mW, B>25, >900MHz	SOT-23	16ta	-	3a	Sam
7H	-	MMBR5179	Si-npn	UHF, 20V, 50mA, 375mW, B>25, 1.4GHz	SOT-23	16ta	-	3a	Mot
7H	-	R3131N37EA	Vdet-IC	3.7V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
-7H	-	PBRP123ET	Si-pnp-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxH
7H5	-	TC597602ECB	LVR-IC	LDO, -7.6V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
7Hg	-	FT532Hg	LVR-IC	LDO, 2.85V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
7I	-	FT532Ih	LVR-IC	LDO, 3.0V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
7I	-	UN212X	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=270R/5k	SC-59	16ta	-	3a	Pan
7I	-	UNR212X	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=270R/5k	SC-59	16ta	-	3a	Pan
7Ig	-	FT532Ig	LVR-IC	LDO, 3.0V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
7J	-	FMMT38C	Si-npn-Darl	GP, 80V, 300mA, 330mW, B>5000	SOT-23	16ta	-	3a	Zx
7J	-	FT532Jh	LVR-IC	LDO, 3.3V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
7J	-	R3131N47EA	Vdet-IC	4.7V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
-7J	-	PBRN123ET	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxH
7Jg	-	FT532Jg	LVR-IC	LDO, 3.3V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
7K	-	FT532Kh	LVR-IC	LDO, 3.6V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
7K	-	MMBR2857	Si-npn	UHF, 30V, 40mA, >1GHz	SOT-23	16ta	-	3a	Mot

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
-7K	-	PBRP113ET	Si-pnp-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxH
7K5	-	TC597702ECB	LVR-IC	LDO, -7.7V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
7Kg	-	FT532Kg	LVR-IC	LDO, 3.6V±2%, 700mA	SOT-23	16cq	VR1	3d	Fmd
7Kp	-	BAP65-05	PIN-diode	Dual, RF, 30V, 100mA, 250mW, 0.61pF, 0.3Ω(100mA/100MHz)	SOT-23	16dg	-	3a	Phi
7L	-	2SA2122	Si-pnp	GP, 60V, 100mA, 150mW, B=160..460, 80MHz	SOT-323	16ta	-	3a	Pan
-7L	-	PBRN113ZT	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxH
7L5	-	TC597802ECB	LVR-IC	LDO, -7.8V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
7M	-	2SD5950	Si-npn	AF-Amp, 60V, 100mA, 150mW, B=160..460, 100MHz	SOT-323	16ta	-	3a	Pan
7M	-	BCW66HR	Si-npn	AF, 75V, 800mA, 330mW, B=250..630, >100MHz	SOT-23	16te	-	3a	Zx
7M	-	MMBR521	Si-pnp	UHF, 20V, 70mA, 333mW, B=25..125, 3.4GHz	SOT-23	16ta	-	3a	Mot
-7M	-	PBRP113ZT	Si-pnp-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxH
7M5	-	TC597902ECB	LVR-IC	LDO, -7.9V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
7N	-	BCW68HR	Si-pnp	AF, Sw, 60V, 800mA, 330mW, B=250..630, >100MHz	SOT-23	16ta	-	3a	Zx
7N	-	MMBR941B	Si-npn	UHF, 20V, 50mA, 250mW, B=100..200, 8GHz	SOT-23	16ta	-	3a	Mot
7O	-	2SA1621-O	Si-pnp	GP, 35V, 800mA, 150mW, B=70..140, 120MHz	SOT-23	16ta	-	3a	Tos
7P	-	BCW66FR	Si-npn	AF, 75V, 800mA, 330mW, B=100..250, >100MHz	SOT-23	16te	-	3a	Zx
7P	-	MMBR911	Si-npn	UHF, 20V, 60mA, 300mW, B=30..200, 6GHz	SOT-23	16ta	-	3a	Mot
7P	-	UN21174	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=10k/47k	SOT-523F	18ta	-	3a	Pan
7P	-	UNR5174	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=10k/47k	SOT-323	16ta	-	3a	Pan
-7P	-	PBRN123YT	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxH
-7Q	-	PBRP123YT	Si-pnp-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxH
7R	-	MMBR536	Si-npn	UHF, 15V, 30mA, 4.5MHz	SOT-23	16ta	-	3a	Mot
7R	-	SRA2207E	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10/47k	SOT-523	16ta	-	3a	Auk
7R	-	SRA2207EF	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10/47k	SOT-523F	18ta	-	3a	Auk
7R	-	SRA2207U	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10/47k	SOT-323	16ta	-	3a	Auk
7R	-	SRA2207UF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10/47k	SOT-323F	18ta	-	3a	Auk
7R	-	UN22274	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=10k/47k	SOT-523F	18ta	-	3a	Pan
7R	-	UNR5274	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=10k/47k	SOT-323	16ta	-	3a	Pan
-7R	-	PDTD113ET	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxH
-7S	-	PDTB123ET	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxH
7T	-	BCW68FR	Si-pnp	AF, Sw, 60V, 800mA, 330mW, B=100..250, >100MHz	SOT-23	16te	-	3a	Zx
-7T	-	PDTD123ET	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxH
7t0	-	1PS70SB10	Si-diode	Schottky, Sw, Fast, 30V, 200mA, <5ns	SOT-323	16dc	-	3a	PhM
7t4	-	1PS70SB14	Si-diode	Dual, Schottky, Sw, Fast, 30V, 200mA, <5ns	SOT-323	16dl	-	3a	PhM
7t5	-	1PS70SB15	Si-diode	Dual, Schottky, Sw, Fast, 30V, 200mA, <5ns	SOT-323	16dg	-	3a	PhM
7t6	-	1PS70SB16	Si-diode	Dual, Schottky, Sw, Fast, 30V, 200mA, <5ns	SOT-323	16df	-	3a	PhM
7U	-	CH238UPT	Si-diode	Dual, Sw, 80V, 200mA, Vf<1.2V(200mA), 4ns	SOT-323	16dl	-	3a	Chm
-7U	-	PDTB113ET	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxH
-7V	-	PDTD113ZT	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxH
7V5	-	CHPZ7V5PT	Z-diode	Dual, 7.1..7.9V, Izt=5mA, Zzt=15Ω, 350mW	SOT-23	16df	-	3a	Chm
7V5	-	PZM7.5NB	Z-diode	7.5V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
-7W	-	PDTB113ZT	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxH
7W0	-	1PS70SB10	Si-diode	Schottky, Sw, Fast, 30V, 200mA, <5ns	SOT-323	16dc	-	3a	PhC
7W4	-	1PS70SB14	Si-diode	Dual, Schottky, Sw, Fast, 30V, 200mA, <5ns	SOT-323	16dl	-	3a	PhC
7W5	-	1PS70SB15	Si-diode	Dual, Schottky, Sw, Fast, 30V, 200mA, <5ns	SOT-323	16dg	-	3a	PhC
7W6	-	1PS70SB16	Si-diode	Dual, Schottky, Sw, Fast, 30V, 200mA, <5ns	SOT-323	16df	-	3a	PhC
7X	-	MMBR571	Si-npn	UHF, 20V, 80mA, 330mW, B=50..300, 8GHz	SOT-23	16ta	-	3a	Mot
-7X	-	PDTD123YT	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxH
7Y	-	2SA1621-Y	Si-pnp	GP, 35V, 800mA, 150mW, B=120..240, 120MHz	SOT-23	16ta	-	3a	Tos
7Y	-	MMBR941	Si-npn	UHF, 20V, 50mA, 250mW, B=100..200, 8GHz	SOT-23	16ta	-	3a	Mot
7Y	-	UN212Y	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=3.1k/4.6k	SC-59	16ta	-	3a	Pan
7Y	-	UNR212Y	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=3.1k/4.6k	SC-59	16ta	-	3a	Pan
-7Y	-	PDTB123YT	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxH
7Z	-	MMBR951	Si-npn	UHF, 20V, 100mA, 322mW, B=50..200, 8GHz	SOT-23	16ta	-	3a	Mot
7Z5	-	CZ1W7V5	Z-diode	7.5V±5%, Izt=34mA, 600mW	SOT-23	16dc	-	3a	Cdi
8	cr	ELM7550NEB	Vdet-IC	5.0V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
8	cs	ELM7550CEB	Vdet-IC	5.0V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
8.2	-	TZT8.2W	Z-diode	7.70..8.70V, Izt=5mA, Zzt=20Ω, 200mW	SOT-23	16dc	-	3a	Ttr
8.2	-	Z02W8.2V	Z-diode	7.70..8.70V, Izt=5mA, Zzt=20Ω, 200mW	SOT-23	16dc	-	3f	Kec
8.2A	-	MA4Z082WA	Z-diode	Dual, 8.2V, If=100mA, Zzt=20Ω(5mA), 200mW	SOT-323	16df	-	3a	Pan
8.2A	-	MAZ3082WA	Z-diode	Dual, 8.2V, If=100mA, Zzt=15Ω, 200mW	SC-59	16df	-	3a	Pan
8.2G	-	ZD8.2G-AE3	Z-diode	8.2V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
8.2H	-	BZX84C8V2-V	Z-diode	7.96..8.43V, Izt=5mA, Zzt=20Ω, 300mW	SOT-23	16dc	-	3f	Kec
8.2H	-	MAZ3082-H	Z-diode	7.7..8.7V, If=100mA, Zzt=15Ω, 200mW	SC-59	16dc	-	3a	Pan
8.2L	-	MAZ3082-L	Z-diode	7.7..8.7V, If=100mA, Zzt=15Ω, 200mW	SC-59	16dc	-	3a	Pan
8.2L	-	ZD8.2L-AE3	Z-diode	8.2V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
8.2M	-	MAZ3082-M	Z-diode	7.7..8.7V, If=100mA, Zzt=15Ω, 200mW	SC-59	16dc	-	3a	Pan
8.2X	-	TZT8.2XW	Z-diode	7.70..8.16V, Izt=5mA, Zzt=20Ω, 200mW	SOT-23	16dc	-	3a	Ttr
8.2X	-	Z02W8.2VX	Z-diode	7.70..8.16V, Izt=5mA, Zzt=20Ω, 200mW	SOT-23	16dc	-	3f	Kec
8.2Y	-	TZT8.2YW	Z-diode	7.96..8.43V, Izt=5mA, Zzt=20Ω, 200mW	SOT-23	16dc	-	3a	Ttr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8.2Y	-	Z02W8.2VY	Z-diode	7.96..8.43V, Izt=5mA, Zzt=20Ω, 200mW	SOT-23	16dc	-	3f	Kec
8.2Z	-	MAZ9082H	SAZ-diode	Dual, 8.2V, Zzt=30Ω(5mA), 200mW	SC-59	16df	-	3a	Pan
8.2Z	-	MAZT082H	SAZ-diode	Dual, 8.2V, 5mA, 150mW	SC-89	18df	-	3a	Pan
8.2Z	-	MAZV082D	SAZ-diode	Dual, 8.2V, Zzt=20Ω(5mA), 150mW	SOT-323	18df	-	3a	Pan
8.2Z	-	TZT8.2ZW	Z-diode	8.23..8.70V, Izt=5mA, Zzt=20Ω, 200mW	SOT-23	16dc	-	3a	Ttr
8.2Z	-	Z02W8.2VZ	Z-diode	8.23..8.70V, Izt=5mA, Zzt=20Ω, 200mW	SOT-23	16dc	-	3f	Kec
80	-	AP8822N-50GA	Vdet-IC	5.0V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
80	-	AP8822N-50GT	Vdet-IC	5.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
80	-	AP8822N-50PA	Vdet-IC	5.0V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
80	-	AP8822N-50PT	Vdet-IC	5.0V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
80	cq	ELM7530NBB	Vdet-IC	3.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
80	ct	ELM7530CBB	Vdet-IC	3.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
803J	-	SGM803-MXN3	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Sgm
803L	-	SGM803-LXN3	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Sgm
803M	-	SGM803-MXN3	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Sgm
803R	-	SGM803-RXN3	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Sgm
803S	-	SGM803-SXN3	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Sgm
803T	-	SGM803-TXN3	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Sgm
803Z	-	SGM803-ZXN3	Vdet-IC	2.32V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Sgm
809J	-	SGM809-JXN3	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Sgm
809JL	-	SGM809-JXN3	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23L	16vdb	VD7	3a	Sgm
809L	-	SGM809-LXN3	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Sgm
809LL	-	SGM809-LXN3	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23L	16vdb	VD7	3a	Sgm
809M	-	MT809M-4.38S	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mam
809M	-	SGM809-MXN3	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Sgm
809ML	-	SGM809-MXN3	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23L	16vdb	VD7	3a	Sgm
809R	-	MT809S-2.63S	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mam
809R	-	SGM809-RXN3	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Sgm
809RL	-	SGM809-RXN3	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23L	16vdb	VD7	3a	Sgm
809S	-	MT809R-2.93S	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mam
809S	-	SGM809-SXN3	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Sgm
809SL	-	SGM809-SXN3	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23L	16vdb	VD7	3a	Sgm
809T	-	MT809T-3.08S	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mam
809T	-	SGM809-TXN3	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Sgm
809TL	-	SGM809-TXN3	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23L	16vdb	VD7	3a	Sgm
809X	-	SGM809-ZXN3	Vdet-IC	1.63V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Sgm
809Z	-	SGM809-ZXN3	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Sgm
809ZL	-	SGM809-ZXN3L	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23L	16vdb	VD7	3a	Sgm
80T	-	TK71580AS	LVR-IC	LDO, 8V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
81	-	AP8822N-51GA	Vdet-IC	5.1V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
81	-	AP8822N-51GT	Vdet-IC	5.1V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
81	-	AP8822N-51PA	Vdet-IC	5.1V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
81	-	AP8822N-51PT	Vdet-IC	5.1V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
81	-	BAT7854W	Si-diode	Schottky, Sw, U-Fst, 40V, 200mA, Vf<0.55V(0.1A), <0.3ns	SOT-323	16dc	-	3a	Phi
81	cq	ELM7531NBB	Vdet-IC	3.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
81	ct	ELM7531CBB	Vdet-IC	3.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
810A	-	DS1810-5	Vdet-IC	5.0V±5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Dal
810B	-	DS1810-10	Vdet-IC	5.0V±10%, -Reset PPO	SOT-23	16vdb	VD7	3a	Dal
810C	-	DS1810-15	Vdet-IC	5.0V±15%, -Reset PPO	SOT-23	16vdb	VD7	3a	Dal
810D	-	DS1810-20	Vdet-IC	5.0V±20%, -Reset PPO	SOT-23	16vdb	VD7	3a	Dal
810J	-	SGM810-JXN3	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3a	Sgm
810L	-	SGM810-LXN3	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3a	Sgm
810M	-	SGM810-MXN3	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3a	Sgm
810R	-	SGM810-RXN3	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3a	Sgm
810S	-	SGM810-SXN3	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3a	Sgm
810T	-	SGM810-TXN3	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3a	Sgm
810Z	-	SGM810-ZXN3	Vdet-IC	2.32V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3a	Sgm
811A	-	DS1811-5	Vdet-IC	5.0V±5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Dal
811B	-	DS1811-10	Vdet-IC	5.0V±10%, -Reset ODO	SOT-23	16vdb	VD6	3a	Dal
811C	-	DS1811-15	Vdet-IC	5.0V±15%, -Reset ODO	SOT-23	16vdb	VD6	3a	Dal
811D	-	DS1811-20	Vdet-IC	5.0V±20%, -Reset ODO	SOT-23	16vdb	VD6	3a	Dal
812A	-	DS1812-5	Vdet-IC	5.0V±5%, +Reset PPO	SOT-23	16vdb	VD7	3a	Dal
812B	-	DS1812-10	Vdet-IC	5.0V±10%, +Reset PPO	SOT-23	16vdb	VD7	3a	Dal
812C	-	DS1812-15	Vdet-IC	5.0V±15%, +Reset PPO	SOT-23	16vdb	VD7	3a	Dal
812D	-	DS1812-20	Vdet-IC	5.0V±20%, +Reset PPO	SOT-23	16vdb	VD7	3a	Dal
813A	-	DS1813-5	Vdet-IC	5.0V±5%, MR, +Reset ODO	SOT-23	16vdb	VD10	3a	Dal
813B	-	DS1813-10	Vdet-IC	5.0V±5%, MR, +Reset ODO	SOT-23	16vdb	VD10	3a	Dal
813C	-	DS1813-15	Vdet-IC	5.0V±5%, MR, +Reset ODO	SOT-23	16vdb	VD10	3a	Dal
813D	-	DS1813-20	Vdet-IC	5.0V±5%, MR, +Reset ODO	SOT-23	16vdb	VD10	3a	Dal
815A	-	DS1815-5	Vdet-IC	3.3V±5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Dal



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
815B	-	DS1815-10	Vdet-IC	3.3V±5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Dal
815C	-	DS1815-15	Vdet-IC	3.3V±5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Dal
815D	-	DS1815-20	Vdet-IC	3.3V±5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Dal
816A	-	DS1816-5	Vdet-IC	3.3V±5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Dal
816B	-	DS1816-10	Vdet-IC	3.3V±5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Dal
816C	-	DS1816-15	Vdet-IC	3.3V±5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Dal
816D	-	DS1816-20	Vdet-IC	3.3V±5%, -Reset ODO	SOT-23	16vdb	VD6	3a	Dal
817A	-	DS1817-5	Vdet-IC	3.3V±5%, +Reset PPO	SOT-23	16vdb	VD7	3a	Dal
817B	-	DS1817-10	Vdet-IC	3.3V±10%, +Reset PPO	SOT-23	16vdb	VD7	3a	Dal
817C	-	DS1817-15	Vdet-IC	3.3V±15%, +Reset PPO	SOT-23	16vdb	VD7	3a	Dal
817D	-	DS1817-20	Vdet-IC	3.3V±20%, +Reset PPO	SOT-23	16vdb	VD7	3a	Dal
818A	-	DS1818-5	Vdet-IC	3.3V±5%, MR, -Reset ODO	SOT-23	16vdb	VD10	3a	Dal
818B	-	DS1818-10	Vdet-IC	3.3V±5%, MR, -Reset ODO	SOT-23	16vdb	VD10	3a	Dal
818C	-	DS1818-15	Vdet-IC	3.3V±5%, MR, -Reset ODO	SOT-23	16vdb	VD10	3a	Dal
818D	-	DS1818-20	Vdet-IC	3.3V±5%, MR, -Reset ODO	SOT-23	16vdb	VD10	3a	Dal
81A	-	CMBZ5250B	Z-diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 300mW	SOT-23	16dc	-	3a	Mei
81A	-	CMPZ5250B	Z-diode	20V±2.5%, Izt=6.2mA, Zzt=25Ω, 350mW	SOT-23	16dc	-	3a	Cen
81A	-	FDZS20LT	Z-diode	19.0..21.0V, Izt=6.2mA, Zzt=25Ω, 225mW	SOT-23	16dc	-	3a	Fis
81A	-	HMBZ5250B	Z-diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 225mW	SOT-23	16dc	-	3a	Hsn
81A	-	LMBZ5250BL	Z-diode	19..21V, Izt=6.2mA, 225mW	SOT-23	16dc	-	3c	Lrc
81A	-	MMBZ5250B	Z-diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 225mW	SOT-23	16dc	-	3c	Ons
81A	-	PMBZ5250B	Z-diode	20V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	Phi
81A	-	SMBZ5250B	Z-diode	20V±5%, Izt=6.2mA, 500mW	SOT-23	16dc	-	3a	Sur
81A	-	TMPZ5250	Z-diode	19..21V, Zzt<25Ω, 250mW	SOT-23	16dc	-	3a	All
81A	-	TMPZ5250R	Z-diode	19..21V, Zzt<25Ω, 250mW	SOT-23	16dr	-	3a	All
81A	-	ZD5250BN3	Z-diode	20V±5%, 6.2mA, Zzt=25Ω, 300mW	SOT-23	16dc	-	3a	Cys
81A-	-	MMCZ5250BPT	Z-diode	19.0..21.0V, Izt=5mA, Zzt=48Ω, 225mW	SOT-346	16dc	-	3a	Chm
81B	-	CMBZ5251B	Z-diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 300mW	SOT-23	16dc	-	3a	Mei
81B	-	CMPZ5251B	Z-diode	22V±2.5%, Izt=5.6mA, Zzt=29Ω, 350mW	SOT-23	16dc	-	3a	Cen
81B	-	FDZS22LT	Z-diode	20.90..23.10V, Izt=5.6mA, Zzt=29Ω, 225mW	SOT-23	16dc	-	3a	Fis
81B	-	HMBZ5251B	Z-diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 225mW	SOT-23	16dc	-	3a	Hsn
81B	-	LMBZ5251BL	Z-diode	20.9..23.1V, Izt=5.6mA, 225mW	SOT-23	16dc	-	3c	Lrc
81B	-	MMBZ5251B	Z-diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 225mW	SOT-23	16dc	-	3c	Ons
81B	-	PMBZ5251B	Z-diode	22V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	Phi
81B	-	SMBZ5251B	Z-diode	22V±5%, Izt=5.6mA, 500mW	SOT-23	16dc	-	3a	Sur
81B	-	TMPZ5251	Z-diode	20.9..23.1V, Zzt<29Ω, 250mW	SOT-23	16dc	-	3a	All
81B	-	TMPZ5251R	Z-diode	20.9..23.1V, Zzt<29Ω, 250mW	SOT-23	16dr	-	3a	All
81B	-	ZD5251BN3	Z-diode	22V±5%, 5.6mA, Zzt=29Ω, 300mW	SOT-23	16dc	-	3a	Cys
81B-	-	MMCZ5251BPT	Z-diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 225mW	SOT-346	16dc	-	3a	Chm
81C	-	CMBZ5252B	Z-diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 300mW	SOT-23	16dc	-	3a	Mei
81C	-	CMPZ5252B	Z-diode	24V±2.5%, Izt=5.2mA, Zzt=33Ω, 350mW	SOT-23	16dc	-	3a	Cen
81C	-	FDZS24LT	Z-diode	22.80..25.20V, Izt=5.2mA, Zzt=33Ω, 225mW	SOT-23	16dc	-	3a	Fis
81C	-	HMBZ5252B	Z-diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 225mW	SOT-23	16dc	-	3a	Hsn
81C	-	LMBZ5252BL	Z-diode	22.8..25.2V, Izt=5.2mA, 225mW	SOT-23	16dc	-	3c	Lrc
81C	-	MMBZ5252B	Z-diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 225mW	SOT-23	16dc	-	3c	Ons
81C	-	PMBZ5252B	Z-diode	24V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	Phi
81C	-	SMBZ5252B	Z-diode	24V±5%, Izt=5.2mA, 500mW	SOT-23	16dc	-	3a	Sur
81C	-	TMPZ5252	Z-diode	22.8..25.2V, Zzt<33Ω, 250mW	SOT-23	16dc	-	3a	All
81C	-	TMPZ5252R	Z-diode	22.8..25.2V, Zzt<33Ω, 250mW	SOT-23	16dr	-	3a	All
81C	-	ZD5252BN3	Z-diode	24V±5%, 5.2mA, Zzt=33Ω, 300mW	SOT-23	16dc	-	3a	Cys
81C-	-	MMCZ5252BPT	Z-diode	22.80..25.20V, Izt=5mA, Zzt=62Ω, 225mW	SOT-346	16dc	-	3a	Chm
81D	-	CMBZ5253B	Z-diode	25V±5%, Izt=5mA, Zzt=35Ω, 300mW	SOT-23	16dc	-	3a	Mei
81D	-	CMPZ5253B	Z-diode	25V±2.5%, Izt=5mA, Zzt=35Ω, 350mW	SOT-23	16dc	-	3a	Cen
81D	-	FDZS25LT	Z-diode	23.75..26.25V, Izt=5mA, Zzt=35Ω, 225mW	SOT-23	16dc	-	3a	Fis
81D	-	HMBZ5253B	Z-diode	25V±5%, Izt=5mA, Zzt=35Ω, 225mW	SOT-23	16dc	-	3a	Hsn
81D	-	LMBZ5253BL	Z-diode	23.75..26.25V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
81D	-	MMBZ5253B	Z-diode	25V±5%, Izt=5.0mA, Zzt=35Ω, 225mW	SOT-23	16dc	-	3c	Ons
81D	-	PMBZ5253B	Z-diode	25V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	Phi
81D	-	SMBZ5253B	Z-diode	25V±5%, Izt=5.0mA, 500mW	SOT-23	16dc	-	3a	Sur
81D	-	TMPZ5253	Z-diode	23.8..26.3V, Zzt<35Ω, 250mW	SOT-23	16dc	-	3a	All
81D	-	TMPZ5253R	Z-diode	23.8..26.3V, Zzt<35Ω, 250mW	SOT-23	16dr	-	3a	All
81D	-	ZD5253BN3	Z-diode	25V±5%, 5mA, Zzt=35Ω, 300mW	SOT-23	16dc	-	3a	Cys
81D-	-	MMCZ5253BPT	Z-diode	23.75..26.25V, Izt=5mA, Zzt=62Ω, 225mW	SOT-346	16dc	-	3a	Chm
81E	-	CMBZ5254B	Z-diode	27V±5%, Izt=4.6mA, Zzt=41Ω, 300mW	SOT-23	16dc	-	3a	Mei
81E	-	CMPZ5254B	Z-diode	27V±2.5%, Izt=4.6mA, Zzt=41Ω, 350mW	SOT-23	16dc	-	3a	Cen
81E	-	FDZS27LT	Z-diode	25.65..28.35V, Izt=4.6mA, Zzt=41Ω, 225mW	SOT-23	16dc	-	3a	Fis
81E	-	HMBZ5254B	Z-diode	27V±5%, Izt=4.6mA, Zzt=41Ω, 225mW	SOT-23	16dc	-	3a	Hsn
81E	-	LMBZ5254BL	Z-diode	25.65..28.35V, Izt=4.6mA, 225mW	SOT-23	16dc	-	3c	Lrc
81E	-	MMBZ5254B	Z-diode	27V±5%, Izt=5.0mA, Zzt=41Ω, 225mW	SOT-23	16dc	-	3c	Ons
81E	-	PMBZ5254B	Z-diode	27V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	Phi



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
81E	-	SMBZ5254B	Z-diode	27V±5%, Izt=4.6mA, 500mW	SOT-23	16dc	-	3a	Sur
81E	-	TMPZ5254	Z-diode	25.7..28.4V, Zzt<41Ω, 250mW	SOT-23	16dc	-	3a	All
81E	-	TMPZ5254R	Z-diode	25.7..28.4V, Zzt<41Ω, 250mW	SOT-23	16dr	-	3a	All
81E	-	ZD5254BN3	Z-diode	27V±5%, 20mA, Zzt=41Ω, 300mW	SOT-23	16dc	-	3a	Cys
81E-	-	MMCZ5254BPT	Z-diode	25.65..28.35V, Izt=5mA, Zzt=70Ω, 225mW	SOT-346	16dc	-	3a	Chm
81F	-	CMBZ5255B	Z-diode	28V±5%, Izt=4.5mA, Zzt=44Ω, 300mW	SOT-23	16dc	-	3a	Mei
81F	-	CMPZ5255B	Z-diode	28V±2.5%, Izt=4.5mA, Zzt=44Ω, 350mW	SOT-23	16dc	-	3a	Cen
81F	-	FDZS28LT	Z-diode	26.60..29.40V, Izt=4.5mA, Zzt=44Ω, 225mW	SOT-23	16dc	-	3a	Fis
81F	-	HMBZ5255B	Z-diode	28V±5%, Izt=4.5mA, Zzt=44Ω, 225mW	SOT-23	16dc	-	3a	Hsn
81F	-	LMBZ5255BL	Z-diode	26.6..29.4V, Izt=4.5mA, 225mW	SOT-23	16dc	-	3c	Lrc
81F	-	MMBZ5255B	Z-diode	28V±5%, Izt=4.5mA, Zzt=44Ω, 225mW	SOT-23	16dc	-	3c	Ons
81F	-	PMBZ5255B	Z-diode	28V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	Phi
81F	-	SMBZ5255B	Z-diode	28V±5%, Izt=4.5mA, 500mW	SOT-23	16dc	-	3a	Sur
81F	-	TMPZ5255	Z-diode	26.6..29.4V, Zzt<44Ω, 250mW	SOT-23	16dc	-	3a	All
81F	-	TMPZ5255R	Z-diode	26.6..29.4V, Zzt<44Ω, 250mW	SOT-23	16dr	-	3a	All
81F	-	ZD5255BN3	Z-diode	28V±5%, 20mA, Zzt=44Ω, 300mW	SOT-23	16dc	-	3a	Cys
81F-	-	MMCZ5255BPT	Z-diode	26.60..29.40V, Izt=5mA, Zzt=44Ω, 225mW	SOT-346	16dc	-	3a	Chm
81G	-	CMBZ5256B	Z-diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 300mW	SOT-23	16dc	-	3a	Mei
81G	-	CMPZ5256B	Z-diode	30V±2.5%, Izt=4.2mA, Zzt=49Ω, 350mW	SOT-23	16dc	-	3a	Cen
81G	-	FDZS30LT	Z-diode	28.50..31.50V, Izt=4.2mA, Zzt=49Ω, 225mW	SOT-23	16dc	-	3a	Fis
81G	-	HMBZ5256B	Z-diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 225mW	SOT-23	16dc	-	3a	Hsn
81G	-	LMBZ5256BL	Z-diode	28.5..31.5V, Izt=4.2mA, 225mW	SOT-23	16dc	-	3c	Lrc
81G	-	MMBZ5256B	Z-diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 225mW	SOT-23	16dc	-	3c	Ons
81G	-	PMBZ5256B	Z-diode	23V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	Phi
81G	-	SMBZ5256B	Z-diode	30V±5%, Izt=4.2mA, 500mW	SOT-23	16dc	-	3a	Sur
81G	-	TMPZ5256	Z-diode	28.5..31.5V, Zzt<49Ω, 250mW	SOT-23	16dc	-	3a	All
81G	-	TMPZ5256R	Z-diode	28.5..31.5V, Zzt<49Ω, 250mW	SOT-23	16dr	-	3a	All
81G	-	ZD5256BN3	Z-diode	30V±5%, 20mA, Zzt=49Ω, 300mW	SOT-23	16dc	-	3a	Cys
81G-	-	MMCZ5256BPT	Z-diode	28.50..31.50V, Izt=5mA, Zzt=78Ω, 225mW	SOT-346	16dc	-	3a	Chm
81H	-	CMBZ5257B	Z-diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 300mW	SOT-23	16dc	-	3a	Mei
81H	-	CMPZ5257B	Z-diode	33V±2.5%, Izt=3.8mA, Zzt=58Ω, 350mW	SOT-23	16dc	-	3a	Cen
81H	-	FDZS33LT	Z-diode	31.35..34.65V, Izt=3.8mA, Zzt=58Ω, 225mW	SOT-23	16dc	-	3a	Fis
81H	-	HMBZ5257B	Z-diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 225mW	SOT-23	16dc	-	3a	Hsn
81H	-	LMBZ5257BL	Z-diode	31.35..34.65V, Izt=3.8mA, 225mW	SOT-23	16dc	-	3c	Lrc
81H	-	MMBZ5257B	Z-diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 225mW	SOT-23	16dc	-	3c	Ons
81H	-	PMBZ5257B	Z-diode	33V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	Phi
81H	-	SMBZ5257B	Z-diode	33V±5%, Izt=3.8mA, 500mW	SOT-23	16dc	-	3a	Sur
81H	-	TMPZ5257	Z-diode	31.4..34.7V, Zzt<58Ω, 250mW	SOT-23	16dc	-	3a	All
81H	-	TMPZ5257R	Z-diode	31.4..34.7V, Zzt<58Ω, 250mW	SOT-23	16dr	-	3a	All
81H	-	ZD5257BN3	Z-diode	33V±5%, 20mA, Zzt=58Ω, 300mW	SOT-23	16dc	-	3a	Cys
81H-	-	MMCZ5257BPT	Z-diode	31.35..34.65V, Izt=5mA, Zzt=88Ω, 225mW	SOT-346	16dc	-	3a	Chm
81J	-	CMBZ5258B	Z-diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 300mW	SOT-23	16dc	-	3a	Mei
81J	-	CMPZ5258B	Z-diode	36V±2.5%, Izt=3.4mA, Zzt=70Ω, 350mW	SOT-23	16dc	-	3a	Cen
81J	-	FDZS36LT	Z-diode	34.20..37.80V, Izt=3.4mA, Zzt=70Ω, 225mW	SOT-23	16dc	-	3a	Fis
81J	-	HMBZ5258B	Z-diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 225mW	SOT-23	16dc	-	3a	Hsn
81J	-	LMBZ5258BL	Z-diode	34.2..37.8V, Izt=3.4mA, 225mW	SOT-23	16dc	-	3c	Lrc
81J	-	MMBZ5258B	Z-diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 225mW	SOT-23	16dc	-	3c	Ons
81J	-	ZD5258BN3	Z-diode	36V±5%, 3.4mA, Zzt=70Ω, 300mW	SOT-23	16dc	-	3a	Cys
81J-	-	MMCZ5258BPT	Z-diode	34.20..37.80V, Izt=5mA, Zzt=95Ω, 225mW	SOT-346	16dc	-	3a	Chm
81K	-	CMBZ5259B	Z-diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 300mW	SOT-23	16dc	-	3a	Mei
81K	-	CMPZ5259B	Z-diode	39V±2.5%, Izt=3.2mA, Zzt=80Ω, 350mW	SOT-23	16dc	-	3a	Cen
81K	-	FDZS39LT	Z-diode	37.05..40.95V, Izt=3.2mA, Zzt=80Ω, 225mW	SOT-23	16dc	-	3a	Fis
81K	-	HMBZ5259B	Z-diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 225mW	SOT-23	16dc	-	3a	Hsn
81K	-	LMBZ5259BL	Z-diode	37.05..40.95V, Izt=3.2mA, 225mW	SOT-23	16dc	-	3c	Lrc
81K	-	MMBZ5259B	Z-diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 225mW	SOT-23	16dc	-	3c	Ons
81K-	-	MMCZ5259BPT	Z-diode	37.05..40.95V, Izt=5mA, Zzt=130Ω, 225mW	SOT-346	16dc	-	3a	Chm
81L	-	CMPZ5260B	Z-diode	43V±2.5%, Izt=3.0mA, Zzt=93Ω, 350mW	SOT-23	16dc	-	3a	Cen
81L	-	FDZS43LT	Z-diode	40.85..45.15V, Izt=3mA, Zzt=93Ω, 225mW	SOT-23	16dc	-	3a	Fis
81L	-	HMBZ5260B	Z-diode	43V±5%, Izt=3mA, Zzt=93Ω, 225mW	SOT-23	16dc	-	3a	Hsn
81L	-	LMBZ5260BL	Z-diode	40.85..45.15V, Izt=3mA, 225mW	SOT-23	16dc	-	3c	Lrc
81L	-	MMBZ5260B	Z-diode	43V±5%, Izt=3.0mA, Zzt=93Ω, 225mW	SOT-23	16dc	-	3c	Ons
81L-	-	MMCZ5260BPT	Z-diode	40.85..45.15V, Izt=3.0mA, Zzt=93Ω, 225mW	SOT-346	16dc	-	3a	Chm
81M	-	CMPZ5261B	Z-diode	47V±2.5%, Izt=2.7mA, Zzt=105Ω, 350mW	SOT-23	16dc	-	3a	Cen
81M	-	FDZS47LT	Z-diode	44.65..49.35V, Izt=2.7mA, Zzt=105Ω, 225mW	SOT-23	16dc	-	3a	Fis
81M	-	HMBZ5261B	Z-diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 225mW	SOT-23	16dc	-	3a	Hsn
81M	-	LMBZ5261BL	Z-diode	44.65..49.35V, Izt=2.7mA, 225mW	SOT-23	16dc	-	3c	Lrc
81M	-	MMBZ5261B	Z-diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 225mW	SOT-23	16dc	-	3c	Ons
81M-	-	MMCZ5261BPT	Z-diode	44.65..49.35V, Izt=2.7mA, Zzt=105Ω, 225mW	SOT-346	16dc	-	3a	Chm
81N	-	FDZS51LT	Z-diode	48.45..53.55V, Izt=2.5mA, Zzt=125Ω, 225mW	SOT-23	16dc	-	3a	Fis
81N	-	LMBZ5262BL	Z-diode	48.45..53.55V, Izt=2.5mA, 225mW	SOT-23	16dc	-	3c	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
81N	-	MMBZ5262B	Z-diode	51V±5%, Izt=2.5mA, Zzt=125Ω, 225mW	SOT-23	16dc	-	3c	Ons
81P	-	FDZS56LT	Z-diode	53.20..58.80V, Izt=2.2mA, Zzt=150Ω, 225mW	SOT-23	16dc	-	3a	Fis
81P	-	LMBZ5263BL	Z-diode	53.2..58.8V, Izt=2.2mA, 225mW	SOT-23	16dc	-	3c	Lrc
81P	-	MMBZ5263B	Z-diode	56V±5%, Izt=2.2mA, Zzt=150Ω, 225mW	SOT-23	16dc	-	3c	Ons
81Q	-	FDZS60LT	Z-diode	57.0..63.0V, Izt=2.1mA, Zzt=170Ω, 225mW	SOT-23	16dc	-	3a	Fis
81Q	-	LMBZ5264BL	Z-diode	57..63V, Izt=2.1mA, 225mW	SOT-23	16dc	-	3c	Lrc
81Q	-	MMBZ5264B	Z-diode	60V±5%, Izt=2.1mA, Zzt=170Ω, 225mW	SOT-23	16dc	-	3c	Ons
81R	-	FDZS62LT	Z-diode	58.90..65.10V, Izt=2mA, Zzt=185Ω, 225mW	SOT-23	16dc	-	3a	Fis
81R	-	LMBZ5265BL	Z-diode	58.9..65.1V, Izt=2mA, 225mW	SOT-23	16dc	-	3c	Lrc
81R	-	MMBZ5265B	Z-diode	62V±5%, Izt=2.0mA, Zzt=185Ω, 225mW	SOT-23	16dc	-	3c	Ons
81S	-	FDZS68LT	Z-diode	64.60..71.40V, Izt=1.8mA, Zzt=230Ω, 225mW	SOT-23	16dc	-	3a	Fis
81S	-	LMBZ5266BL	Z-diode	64.6..71.4V, Izt=1.8mA, 225mW	SOT-23	16dc	-	3c	Lrc
81S	-	MMBZ5266B	Z-diode	68V±5%, Izt=1.8mA, Zzt=230Ω, 225mW	SOT-23	16dc	-	3c	Ons
81T	-	FDZS75LT	Z-diode	71.25..78.75V, Izt=1.7mA, Zzt=270Ω, 225mW	SOT-23	16dc	-	3a	Fis
81T	-	LMBZ5267BL	Z-diode	71.25..78.75V, Izt=1.7mA, 225mW	SOT-23	16dc	-	3c	Lrc
81T	-	MMBZ5267B	Z-diode	75V±5%, Izt=1.7mA, Zzt=270Ω, 225mW	SOT-23	16dc	-	3c	Ons
81U	-	FDZS82LT	Z-diode	77.90..86.10V, Izt=1.5mA, Zzt=330Ω, 225mW	SOT-23	16dc	-	3a	Fis
81U	-	LMBZ5268BL	Z-diode	77.9..86.1V, Izt=1.5mA, 225mW	SOT-23	16dc	-	3c	Lrc
81U	-	MMBZ5268B	Z-diode	82V±5%, Izt=1.5mA, Zzt=330Ω, 225mW	SOT-23	16dc	-	3c	Ons
81V	-	FDZS87LT	Z-diode	82.65..91.35V, Izt=1.4mA, Zzt=370Ω, 225mW	SOT-23	16dc	-	3a	Fis
81V	-	LMBZ5269BL	Z-diode	82.65..91.35V, Izt=1.4mA, 225mW	SOT-23	16dc	-	3c	Lrc
81V	-	MMBZ5269B	Z-diode	87V±5%, Izt=1.4mA, Zzt=370Ω, 225mW	SOT-23	16dc	-	3c	Ons
81W	-	FDZS91LT	Z-diode	86.45..95.55V, Izt=1.4mA, Zzt=400Ω, 225mW	SOT-23	16dc	-	3a	Fis
81W	-	LMBZ5270BL	Z-diode	86.45..95.55V, Izt=1.4mA, 225mW	SOT-23	16dc	-	3c	Lrc
81W	-	MMBZ5270B	Z-diode	91V±5%, Izt=1.4mA, Zzt=400Ω, 225mW	SOT-23	16dc	-	3c	Ons
82	-	2SC5009-FB	Si-npn	UHF-L-band, 9V, 10mA, 60mW, 12GHz, B=75..150	SOT-23	16ta	-	3a	Nec
82	-	AP8822N-52GA	Vdet-IC	5.2V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
82	-	AP8822N-52GT	Vdet-IC	5.2V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
82	-	AP8822N-52PA	Vdet-IC	5.2V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
82	-	AP8822N-52PT	Vdet-IC	5.2V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
82	-	BAT7854AW	Si-diode	Dual, Schottky, Sw, U-Fst, 40V, 0.2A, Vf<0.55V(0.1A), <0.3ns	SOT-323	16df	-	3a	Phi
82	-	CHDTA114YMPT	Si-pnp-Digi	Sw, 50V, 70mA, 250MHz, R1/R2=10/47k	SOT-723	18ta	-	3a	Chm
82	-	MAZW082H	SAZ-diode	Dual, 8.2V, 5mA, 150mW	SSSMini3	18df	-	3a	Pan
82	cq	ELM7532NBB	Vdet-IC	3.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
82	ct	ELM7532CBB	Vdet-IC	3.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
820	-	HZM8.2NB	Z-diode	7.76..8.64V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
821	-	HZM8.2NB1	Z-diode	7.76..8.1V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
821	-	PZM8.2NB1	Z-diode	8.2V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
822	-	HZM8.2NB2	Z-diode	8.02..8.36V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
822	-	HZM8.2NB3	Z-diode	8.28..8.64V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
822	-	PZM8.2NB2	Z-diode	8.2V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
823	-	PZM8.2NB3	Z-diode	8.2V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
83	-	2SC5010	Si-npn	UHF/SHF, 9V, 30mA, 125mW, B=75..150, 12GHz	SOT-23	16ta	-	3a	Nec
83	-	AP8822N-53GA	Vdet-IC	5.3V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
83	-	AP8822N-53GT	Vdet-IC	5.3V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
83	-	AP8822N-53PA	Vdet-IC	5.3V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
83	-	AP8822N-53PT	Vdet-IC	5.3V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
83	-	BAT68	Si-diode	Schottky, VHF/UHF-Mix, Sw, 8V, 130mA, Vf<0.5V, Cd<1.0pF	SOT-23	16dc	-	3c	Inf
83	-	BAT7854CW	Si-diode	Dual, Schottky, Sw, U-Fst, 40V, 0.2A, Vf<0.55V(0.1A), <0.3ns	SOT-323	16dg	-	3a	Phi
83	-	CHDTA114EMPT	Si-pnp-Digi	Sw, 50V, 50mA, 250MHz, R1/R2=10k/10k	SOT-723	18ta	-	3a	Chm
83	cq	ELM7533NBB	Vdet-IC	3.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
83	ct	ELM7533CBB	Vdet-IC	3.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
84	-	2SC5181-FB	Si-npn	μWave, LN, 5V, 10mA, 30mW, B=70..140, 13GHz	SOT-323	16ta	-	3a	Nec
84	-	AP8822N-54GA	Vdet-IC	5.4V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
84	-	AP8822N-54GT	Vdet-IC	5.4V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
84	-	AP8822N-54PA	Vdet-IC	5.4V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
84	-	AP8822N-54PT	Vdet-IC	5.4V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
84	-	BAT68-04	Si-diode	Dual, Schottky, 8V, 130mA, Vf<0.5V, Cd<1.0pF	SOT-23	16dl	-	3c	Inf
84	-	BAT7854SW	Si-diode	Dual, Schottky, Sw, U-Fst, 40V, 0.2A, Vf<0.55V(0.1A), <0.3ns	SOT-323	16dl	-	3a	Phi
84	-	CHDTA114WMPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=10k/4.7k	SOT-723	18ta	-	3a	Chm
84	-	DTC114WE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=10k/4k7	SOT-416	16ta	-	3a	Rhm
84	-	DTC114WKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/4k7	SOT-346	16ta	-	3a	Rhm
84	-	DTC114WUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/4k7	UMT3	16ta	-	3a	Rhm
84	cq	ELM7534NBB	Vdet-IC	3.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
84	ct	ELM7534CBB	Vdet-IC	3.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
84L	-	BSS84	p-MOSFET	V-MOS, LogL, 50V, 130mA, 200mW, <10Ω(130mA), 3/7ns	SOT-23	16fh	-	3a	Pjt
84W	-	BSS84W	p-MOSFET	V-MOS, LogL, 50V, 130mA, 200mW, <10Ω(130mA), 3/7ns	SOT-323	16fh	-	3a	Pjt
85	-	1PS70SB85	Si-diode	Dual, Schottky, UHF-Mix, 15V, 30mA, Vf<0.7V(30mA), 1pF	SOT-323	16dg	-	3a	Phi
85	-	AP8822N-55GA	Vdet-IC	5.5V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
85	-	AP8822N-55GT	Vdet-IC	5.5V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
85	-	AP8822N-55PA	Vdet-IC	5.5V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
85	-	AP8822N-55PT	Vdet-IC	5.5V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
85	-	BAT68-05	Si-diode	Dual, Schottky, 8V, 130mA, Vf<0.5V, Cd<1.0pF	SOT-23	16dg	-	3c	Inf
85	-	CHDTA115EMPT	Si-pnp-Digi	Sw, 50V, 20mA, 250MHz, R1/R2=100k/100k	SOT-723	18ta	-	3a	Chm
85	-	MMBD1701	Si-diode	Fast, 30V, 150mA, 350mW, Vf<1.1V(50mA), 0.7ns	SOT-23	16dc	-	3a	F
85	cq	ELM7535NBB	Vdet-IC	3.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
85	ct	ELM7535CBB	Vdet-IC	3.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
852	-	S852T	Si-npn	RF, LN, 12V, 8mA, 40mW, B=40..150, 5.2GHz	SOT-23	16ta	-	3a	Tfk
85A	-	MMBD1701A	Si-diode	Fast, 30V, 150mA, 350mW, Vf<1.1V(50mA), 1ns	SOT-23	16dc	-	3a	F
85P	-	L8550PLT1	Si-pnp	GP, 40V, 800mA, 225mW, B=120..200	SOT-23	16ta	-	3a	Lrc
85R	-	L8550RLT1	Si-pnp	GP, 40V, 800mA, 225mW, B=200..400	SOT-23	16ta	-	3a	Lrc
85s	-	BAT68-05W	Si-diode	Dual, Schottky, 8V, 130mA, Vf<0.5V, Cd<1.0pF	SOT-323	16dg	-	3c	Inf
85S	-	L8550SLT1	Si-pnp	GP, 40V, 800mA, 225mW, B=300..600	SOT-23	16ta	-	3a	Lrc
86	-	1PS70SB86	Si-diode	Dual, Schottky, UHF-Mix, 15V, 30mA, Vf<0.7V(30mA), 1pF	SOT-323	16df	-	3a	Phi
86	-	2SC5186-FB	Si-npn	µWave, LN, 5V, 30mA, 90mW, B=70..140, 13GHz	SOT-323	16ta	-	3a	Nec
86	-	AP8822N-56GA	Vdet-IC	5.6V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
86	-	AP8822N-56GT	Vdet-IC	5.6V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
86	-	AP8822N-56PA	Vdet-IC	5.6V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
86	-	AP8822N-56PT	Vdet-IC	5.6V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
86	-	BAT68-06	Si-diode	Dual, Schottky, 8V, 130mA, Vf<0.5V, Cd<1.0pF	SOT-23	16df	-	3c	Inf
86	-	CHDTA123EMPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/2.2k	SOT-723	18ta	-	3a	Chm
86	-	DTC144WE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=47k/22k	SOT-416	16ta	-	3a	Rhm
86	-	DTC144WKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/22k	SOT-346	16ta	-	3a	Rhm
86	-	DTC144WUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/22k	UMT3	16ta	-	3a	Rhm
86	-	MMBD1702	Si-diode	Fast, 30V, 150mA, 350mW, Vf<1.1V(50mA), 0.7ns	SOT-23	16dr	-	3a	Jgd
86	cq	ELM7536NBB	Vdet-IC	3.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
86	ct	ELM7536CBB	Vdet-IC	3.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
87	-	1PS70SB84	Si-diode	Dual, Schottky, UHF-Mix, 15V, 30mA, Vf<0.7V(30mA), 1pF	SOT-323	16dl	-	3a	Phi
87	-	AP8822N-57GA	Vdet-IC	5.7V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
87	-	AP8822N-57GT	Vdet-IC	5.7V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
87	-	AP8822N-57PA	Vdet-IC	5.7V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
87	-	AP8822N-57PT	Vdet-IC	5.7V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
87	-	CHDTA123JMPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/47k	SOT-723	18ta	-	3a	Chm
87	-	MMBD1703	Si-diode	Dual, Fast, 30V, 150mA, 350mW, Vf<1.1V(50mA), 0.7ns	SOT-23	16dl	-	3a	F
87	cq	ELM7537NBB	Vdet-IC	3.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
87	ct	ELM7537CBB	Vdet-IC	3.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
87A	-	MMBD1703A	Si-diode	Dual, Fast, 30V, 150mA, 350mW, Vf<1.1V(50mA), 1ns	SOT-23	16dl	-	3a	F
87C	-	BZX84B8V7	Z-diode	8.53..8.87V, Zzt=15Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
87C	-	TZTC8V7WS	Z-diode	8.27..9.14V, Izt=5mA, Zzt=15Ω, 200mW	SOT-323	16dc	-	3a	Ttr
88	-	1PS70SB82	Si-diode	Schottky, UHF-Mix, 15V, 30mA, Vf<0.7V(30mA), 1pF	SOT-323	16dc	-	3a	Phi
88	-	2SC5195-FB	Si-npn	µWave, LN, 9V, 100mA, 125mW, B=80..160, 5GHz	SOT-323	16ta	-	3a	Nec
88	-	AP8822N-58GA	Vdet-IC	5.8V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
88	-	AP8822N-58GT	Vdet-IC	5.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
88	-	AP8822N-58PA	Vdet-IC	5.8V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
88	-	AP8822N-58PT	Vdet-IC	5.8V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
88	-	CHDTA123YMPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/10k	SOT-723	18ta	-	3a	Chm
88	-	MMBD1704	Si-diode	Dual, Fast, 30V, 150mA, 350mW, Vf<1.1V(50mA), 0.7ns	SOT-23	16dg	-	3a	F
88	cq	ELM7538NBB	Vdet-IC	3.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
88	ct	ELM7538CBB	Vdet-IC	3.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
88A	-	MMBD1704A	Si-diode	Dual, Fast, 30V, 150mA, 350mW, Vf<1.1V(50mA), 1ns	SOT-23	16dg	-	3a	F
89	-	AP8822N-59GA	Vdet-IC	5.9V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
89	-	AP8822N-59GT	Vdet-IC	5.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
89	-	AP8822N-59PA	Vdet-IC	5.9V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
89	-	AP8822N-59PT	Vdet-IC	5.9V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
89	-	CHDTA124EMPT	Si-pnp-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=22k/22k	SOT-723	18ta	-	3a	Chm
89	-	MMBD1705	Si-diode	Dual, Fast, 30V, 150mA, 350mW, Vf<1.1V(50mA), 0.7ns	SOT-23	16df	-	3a	F
89	cq	ELM7539NBB	Vdet-IC	3.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
89	ct	ELM7539CBB	Vdet-IC	3.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
89A	-	MMBD1705A	Si-diode	Dual, Fast, 30V, 150mA, 350mW, Vf<1.1V(50mA), 1ns	SOT-23	16df	-	3a	F
8A	-	2DA1774Q	Si-pnp	GP, 60V 150mA, 150mW, B=120..270, >140MHz	SOT-523	16ta	-	3d	Di
8A	-	DTC114EE	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	SOT-416	16ta	-	3a	Ons
8A	-	FDZS3.3LT	Z-diode	3.13..3.47V, Izt=20mA, Zzt=28Ω, 225mW	SOT-23	16dc	-	3a	Fis
8A	-	HMBZ5226B	Z-diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8A	-	LMBZ5226BL	Z-diode	3.13..3.47V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8A	-	MMBZ5226B	Z-diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 225mW	SOT-23	16dc	-	3c	Ons
8A	-	MUN2211	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SC-59	16ta	-	3a	Mot
8A	-	MUN5211	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SOT-323	16ta	-	3a	Mot
8A	-	R3131N18EC	Vdet-IC	1.8V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
8A	-	UN2211	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=10k/10k	SC-59	16ta	-	3a	Pan
8A	-	UN5211	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	Pan

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8A	-	UN9211J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=10k/10k	SS-MiniF	18ta	-	3a	Pan
8A	-	UNR2211	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=10k/10k	SC-59	16ta	-	3a	Pan
8A	-	UNR5211	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=10k/10k	SOT-323	16ta	-	3a	Pan
8A	-	UNR9211J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=10k/10k	SS-MiniF	18ta	-	3a	Pan
8A	-	ZD5226BN3	Z-diode	3.3V±5%, 20mA, Zzt=28Ω, 300mW	SOT-23	16dc	-	3a	Cys
8A-	-	MMCZ5226BPT	Z-diode	3.135..3.465V, Izt=5mA, Zzt=95Ω, 225mW	SOT-346	16dc	-	3a	Chm
8A0	-	LN1138A312NR	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8A1	-	CMSZ5221B	Z-diode	2.4V±5%, 20mA, Zzt=30Ω, 275mW	SOT-323	16dc	-	3a	Cen
8A1	-	LN1138A322NR	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8A2	-	LN1138A332NR	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8A2	-	PZM8.2NB2A	Z-diode	Dual, 8.2V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
8A3	-	LN1138A342NR	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8A4	-	LN1138A352NR	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8A5	-	LN1138A362NR	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8A5	-	TC598002ECB	LVR-IC	LDO, -8.0V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
8A6	-	LN1138A372NR	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8A7	-	LN1138A382NR	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8A8	-	LN1138A392NR	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8A9	-	LN1138A402NR	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AA	-	BC846A	Si-npn	GP, 80V, 100mA, 310mW, B=110..220, >300MHz	SOT-23	16ta	-	3a	Sam
8AA	-	LN1138A412NR	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AA	-	STM809L	Vdet-IC	4.63V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ste
8AB	-	BC846B	Si-npn	GP, 80V, 100mA, 310mW, B=200..450, >300MHz	SOT-23	16ta	-	3a	Sam
8AB	-	LN1138A422NR	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AB	-	STM809M	Vdet-IC	4.38V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ste
8AC	-	BC846C	Si-npn	GP, 80V, 100mA, 310mW, B=420..800, >300MHz	SOT-23	16ta	-	3a	Sam
8AC	-	CMSZ5226B	Z-diode	3.3V±5%, 20mA, Zzt=28Ω, 275mW	SOT-323	16dc	-	3a	Cen
8AC	-	LN1138A432NR	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AC	-	STM809T	Vdet-IC	3.08V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ste
8AD	-	LN1138A442NR	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AD	-	STM809S	Vdet-IC	2.93V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ste
8AE	-	LN1138A452NR	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AE	-	STM809R	Vdet-IC	2.63V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ste
8AF	-	LN1138A462NR	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AF	-	STM810L	Vdet-IC	4.63V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ste
8AG	-	STM810M	Vdet-IC	4.38V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ste
8AH	-	LN1138A472NR	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AH	-	STM810T	Vdet-IC	3.08V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ste
8AJ	-	STM810S	Vdet-IC	2.93V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ste
8AK	-	LN1138A482NR	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AK	-	STM810R	Vdet-IC	2.63V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ste
8AL	-	LN1138A492NR	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AM	-	LN1138A502NR	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AN	-	LN1138A512NR	LVR-IC	LDO, 5.1V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AP	-	LN1138A522NR	LVR-IC	LDO, 5.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AR	-	LN1138A532NR	LVR-IC	LDO, 5.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AS	-	LN1138A542NR	LVR-IC	LDO, 5.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AT	-	LN1138A552NR	LVR-IC	LDO, 5.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AU	-	LN1138A562NR	LVR-IC	LDO, 5.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AV	-	LN1138A572NR	LVR-IC	LDO, 5.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AX	-	LN1138A582NR	LVR-IC	LDO, 5.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AY	-	LN1138A592NR	LVR-IC	LDO, 5.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8AZ	-	LN1138A602NR	LVR-IC	LDO, 6.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8B	-	2DA1774R	Si-pnp	GP, 60V 150mA, 150mW, B=180..390, >140MHz	SOT-523	16ta	-	3d	Di
8B	-	DTC124EE	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SOT-416	16ta	-	3a	Ons
8B	-	FDZS3.6LT	Z-diode	3.42..3.78V, Izt=20mA, Zzt=24Ω, 225mW	SOT-23	16dc	-	3a	Fis
8B	-	HMBZ5227B	Z-diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8B	-	LMBZ5227BL	Z-diode	3.42..3.78V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8B	-	MMBZ5227B	Z-diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 225mW	SOT-23	16dc	-	3c	Ons
8B	-	MUN2212	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SC-59	16ta	-	3a	Mot
8B	-	MUN5212	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SOT-323	16ta	-	3a	Mot
8B	-	R3131N28EC	Vdet-IC	2.8V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
8B	-	UN2212	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=22k/22k	SC-59	16ta	-	3a	Pan
8B	-	UN5212	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=22k/22k	SOT-23	16ta	-	3a	Pan
8B	-	UN9212J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=22k/22k	SS-MiniF	18ta	-	3a	Pan
8B	-	UNR2212	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=22k/22k	SC-59	16ta	-	3a	Pan
8B	-	UNR5212	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=22k/22k	SOT-323	16ta	-	3a	Pan
8B	-	UNR9212J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=22k/22k	SS-MiniF	18ta	-	3a	Pan
8B	-	ZD5227BN3	Z-diode	3.6V±5%, 20mA, Zzt=24Ω, 300mW	SOT-23	16dc	-	3a	Cys
8B-	-	MMCZ5227BPT	Z-diode	3.420..3.780V, Izt=5mA, Zzt=90Ω, 225mW	SOT-346	16dc	-	3a	Chm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8B1	-	CMSZ5222B	Z-diode	2.5V±5%, 20mA, Zzt=30Ω, 275mW	SOT-323	16dc	-	3a	Cen
8B5	-	TC598102ECB	LVR-IC	LDO, -8.1V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
8BB	-	BC847B	Si-npn	GP, 50V, 100mA, 310mW, B=200..450, >300MHz	SOT-23	16ta	-	3a	Sam
8BC	-	CMSZ5227B	Z-diode	3.6V±5%, 20mA, Zzt=24Ω, 275mW	SOT-323	16dc	-	3a	Cen
8C	-	2DA1774S	Si-pnp	GP, 60V 150mA, 150mW, B=270..560, >140MHz	SOT-523	16ta	-	3d	Di
8C	-	DTC144EE	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	SOT-416	16ta	-	3a	Ons
8C	-	FDZS3.9LT	Z-diode	3.70..4.10V, Izt=20mA, Zzt=23Ω, 225mW	SOT-23	16dc	-	3a	Fis
8C	-	HMBZ5228B	Z-diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8C	-	LMBZ5228BL	Z-diode	3.7..4.1V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8C	-	MMBZ5228B	Z-diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 225mW	SOT-23	16dc	-	3c	Ons
8C	-	MUN2213	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SC-59	16ta	-	3a	Mot
8C	-	MUN5213	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SOT-323	16ta	-	3a	Mot
8C	-	R3131N38EC	Vdet-IC	3.8V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
8C	-	UN2213	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=47k/47k	SC-59	16ta	-	3a	Pan
8C	-	UN5213	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=47k/47k	SOT-23	16ta	-	3a	Pan
8C	-	UN9213J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=47k/47k	SS-MiniF	18ta	-	3a	Pan
8C	-	UNR2213	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=47k/47k	SC-59	16ta	-	3a	Pan
8C	-	UNR3213	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 150MHz, R1/R2=47k/47k	SSSMini3	18ta	-	3a	Pan
8C	-	UNR5213	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=47k/47k	SOT-323	16ta	-	3a	Pan
8C	-	UNR9213J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=47k/47k	SS-MiniF	18ta	-	3a	Pan
8C	-	ZD5228BN3	Z-diode	3.9V±5%, 20mA, Zzt=23Ω, 300mW	SOT-23	16dc	-	3a	Cys
8C-	-	MMCZ5228BPT	Z-diode	3.705..4.095V, Izt=5mA, Zzt=90Ω, 225mW	SOT-346	16dc	-	3a	Chm
8C1	-	CMSZ5223B	Z-diode	2.7V±5%, 20mA, Zzt=30Ω, 275mW	SOT-323	16dc	-	3a	Cen
8C5	-	TC598202ECB	LVR-IC	LDO, -8.2V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
8CA	-	BC848A	Si-npn	GP, 30V, 100mA, 310mW, B=110..220, >300MHz	SOT-23	16ta	-	3a	Sam
8CB	-	BC848B	Si-npn	GP, 30V, 100mA, 310mW, B=200..450, >300MHz	SOT-23	16ta	-	3a	Sam
8CC	-	BC848C	Si-npn	GP, 30V, 100mA, 310mW, B=420..800, >300MHz	SOT-23	16ta	-	3a	Sam
8CC	-	CMSZ5228B	Z-diode	3.9V±5%, 20mA, Zzt=23Ω, 275mW	SOT-323	16dc	-	3a	Cen
8D	-	1SS398PT	Si-diode	Dual, Sw, 400V, 100mA, Vf<1.3V(100mA), 500ns	SOT-23	16dl	-	3a	Chm
8D	-	2DC4617Q	Si-npn	GP, 60V 150mA, 150mW, B=120..270, >180MHz	SOT-523	16ta	-	3d	Di
8D	-	DTC114YE	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/47k	SOT-416	16ta	-	3a	Ons
8D	-	FDZS4.3LT	Z-diode	4.08..4.52V, Izt=20mA, Zzt=22Ω, 225mW	SOT-23	16dc	-	3a	Fis
8D	-	HMBZ5229B	Z-diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8D	-	LMBZ5229BL	Z-diode	4.08..4.52V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8D	-	MMBZ5229B	Z-diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 225mW	SOT-23	16dc	-	3c	Ons
8D	-	MUN2214	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10/47k	SC-59	16ta	-	3a	Mot
8D	-	MUN5214	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10/47k	SOT-323	16ta	-	3a	Mot
8D	-	R3131N48EC	Vdet-IC	4.8V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
8D	-	TMPZ5229	Z-diode	4..4.52V, Zzt<22Ω, 250mW	SOT-23	16dc	-	3a	All
8D	-	TMPZ5229R	Z-diode	4..4.52V, Zzt<22Ω, 250mW	SOT-23	16dr	-	3a	All
8D	-	UN2214	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=10k/47k	SC-59	16ta	-	3a	Pan
8D	-	UN5214	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=10k/47k	SOT-23	16ta	-	3a	Pan
8D	-	UN9214J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=10k/47k	SS-MiniF	18ta	-	3a	Pan
8D	-	UNR2214	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=10k/47k	SC-59	16ta	-	3a	Pan
8D	-	UNR5214	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=10k/47k	SOT-323	16ta	-	3a	Pan
8D	-	UNR9214J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=10k/47k	SS-MiniF	18ta	-	3a	Pan
8D	-	ZD5229BN3	Z-diode	4.3V±5%, 20mA, Zzt=22Ω, 300mW	SOT-23	16dc	-	3a	Cys
8D-	-	MMCZ5229BPT	Z-diode	4.085..4.515V, Izt=5mA, Zzt=88Ω, 225mW	SOT-346	16dc	-	3a	Chm
8D1	-	CMSZ5224B	Z-diode	2.8V±5%, 20mA, Zzt=30Ω, 275mW	SOT-323	16dc	-	3a	Cen
8D5	-	TC598302ECB	LVR-IC	LDO, -8.3V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
8DA	-	BC849A	Si-npn	GP, 30V, 100mA, 310mW, B=110..220, >300MHz	SOT-23	16ta	-	3a	Sam
8DC	-	BC849C	Si-npn	GP, 30V, 100mA, 310mW, B=420..800, >300MHz	SOT-23	16ta	-	3a	Sam
8DC	-	CMSZ5229B	Z-diode	4.3V±5%, 20mA, Zzt=22Ω, 275mW	SOT-323	16dc	-	3a	Cen
8E	-	2DC4617R	Si-npn	GP, 60V 150mA, 150mW, B=180..390, >180MHz	SOT-523	16ta	-	3d	Di
8E	-	CMBZ5230B	Z-diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 300mW	SOT-23	16dc	-	3a	Mei
8E	-	DTC114TE	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	SOT-416	16ta	-	3a	Ons
8E	-	FDZS4.7LT	Z-diode	4.46..4.94V, Izt=20mA, Zzt=19Ω, 225mW	SOT-23	16dc	-	3a	Fis
8E	-	FMMTA92R	Si-pnp	Vid, 300/300V, 200mA, 330mW, B>25, >50MHz	SOT-23	16te	-	3a	Zx
8E	-	HMBZ5230B	Z-diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8E	-	LMBZ5230BL	Z-diode	4.46..4.94V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8E	-	MMBZ5230B	Z-diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 225mW	SOT-23	16dc	-	3c	Ons
8E	-	MUN2215	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=10k	SC-59	16ta	-	3a	Mot
8E	-	MUN5215	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=10k	SOT-323	16ta	-	3a	Mot
8E	-	SMBZ5230B	Z-diode	4.7V±5%, Izt=20mA, 500mW	SOT-23	16dc	-	3a	Sur
8E	-	TMPZ5230	Z-diode	4.47..4.94V, Zzt<19Ω, 250mW	SOT-23	16dc	-	3a	All
8E	-	TMPZ5230R	Z-diode	4.47..4.94V, Zzt<19Ω, 250mW	SOT-23	16dr	-	3a	All
8E	-	UN2215	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1=10k	SC-59	16ta	-	3a	Pan
8E	-	UN5215	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1=10k	SOT-23	16ta	-	3a	Pan
8E	-	UN9215J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1=10k	SS-MiniF	18ta	-	3a	Pan
8E	-	UNR2215	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1=10k	SC-59	16ta	-	3a	Pan



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8E	-	UNR5215	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1=10k	SOT-323	16ta	-	3a	Pan
8E	-	UNR9215J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1=10k	SS-MiniF	18ta	-	3a	Pan
8E	-	ZD5230BN3	Z-diode	4.7V±5%, 20mA, Zzt=19Ω, 300mW	SOT-23	16dc	-	3a	Cys
8E-	-	MMCZ5230BPT	Z-diode	4.465..4.935V, Izt=5mA, Zzt=70Ω, 225mW	SOT-346	16dc	-	3a	Chm
8E1	-	CMSZ5225B	Z-diode	3.0V±5%, 20mA, Zzt=29Ω, 275mW	SOT-323	16dc	-	3a	Cen
8E5	-	TC598402ECB	LVR-IC	LDO, -8.4V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
8E9	-	LN1138A10ANR	LVR-IC	LDO, 1.05V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8EA	-	BC850A	Si-npn	GP, 50V, 100mA, 310mW, B=110..220, >300MHz	SOT-23	16ta	-	3a	Sam
8EA	-	LN1138A11ANR	LVR-IC	LDO, 1.15V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8EB	-	BC850B	Si-npn	GP, 50V, 100mA, 310mW, B=200..450, >300MHz	SOT-23	16ta	-	3a	Sam
8EB	-	LN1138A12ANR	LVR-IC	LDO, 1.25V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8EC	-	CMSZ5230B	Z-diode	4.7V±5%, 20mA, Zzt=19Ω, 275mW	SOT-323	16dc	-	3a	Cen
8EC	-	LN1138A13ANR	LVR-IC	LDO, 1.35V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8ED	-	LN1138A14ANR	LVR-IC	LDO, 1.45V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8EE	-	LN1138A15ANR	LVR-IC	LDO, 1.55V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8EF	-	LN1138A16ANR	LVR-IC	LDO, 1.65V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8EH	-	LN1138A17ANR	LVR-IC	LDO, 1.75V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8EK	-	LN1138A18ANR	LVR-IC	LDO, 1.85V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8EL	-	LN1138A19ANR	LVR-IC	LDO, 1.95V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8EM	-	LN1138A20ANR	LVR-IC	LDO, 2.05V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8EN	-	LN1138A21ANR	LVR-IC	LDO, 2.15V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8EP	-	LN1138A22ANR	LVR-IC	LDO, 2.25V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8ER	-	LN1138A23ANR	LVR-IC	LDO, 2.35V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8ES	-	LN1138A24ANR	LVR-IC	LDO, 2.45V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8ET	-	LN1138A25ANR	LVR-IC	LDO, 2.55V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8EU	-	LN1138A26ANR	LVR-IC	LDO, 2.65V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8EV	-	LN1138A27ANR	LVR-IC	LDO, 2.75V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8EX	-	LN1138A28ANR	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8EY	-	LN1138A29ANR	LVR-IC	LDO, 2.95V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8EZ	-	LN1138A30ANR	LVR-IC	LDO, 3.05V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8F	-	2DC4617S	Si-npn	GP, 60V 150mA, 150mW, B=270..560, >180MHz	SOT-523	16ta	-	3d	Di
8F	-	2SA2154-Y	Si-pnp	GP, Amp, 50V, 100mA, 50mW, B=120..240, >80MHz	fSM	19ta	-	3a	Tos
8F	-	CMBZ5231B	Z-diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 300mW	SOT-23	16dc	-	3a	Mei
8F	-	DTC143TE	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4k7	SOT-416	16ta	-	3a	Ons
8F	-	FDZS5.1LT	Z-diode	4.84..5.36V, Izt=20mA, Zzt=17Ω, 225mW	SOT-23	16dc	-	3a	Fis
8F	-	HMBZ5231B	Z-diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8F	-	LMBZ5231BL	Z-diode	4.84..5.36V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8F	-	MMBZ5231B	Z-diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 225mW	SOT-23	16dc	-	3c	Ons
8F	-	MUN2216	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=4k7	SC-59	16ta	-	3a	Mot
8F	-	MUN5216	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=4k7	SOT-323	16ta	-	3a	Mot
8F	-	R3131N18EA	Vdet-IC	1.8V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
8F	-	SMBZ5231B	Z-diode	5.1V±5%, Izt=20mA, 500mW	SOT-23	16dc	-	3a	Sur
8F	-	TMPZ5231	Z-diode	4.85..5.36V, Zzt<17Ω, 250mW	SOT-23	16dc	-	3a	All
8F	-	TMPZ5231R	Z-diode	4.85..5.36V, Zzt<17Ω, 250mW	SOT-23	16dr	-	3a	All
8F	-	UN2216	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1=4k7	SC-59	16ta	-	3a	Pan
8F	-	UN5216	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1=4k7	SOT-23	16ta	-	3a	Pan
8F	-	UN9216J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1=4k7	SS-MiniF	18ta	-	3a	Pan
8F	-	UNR2216	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1=4k7	SC-59	16ta	-	3a	Pan
8F	-	UNR3216	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 150MHz, R1=4.7k	SSSMini3	18ta	-	3a	Pan
8F	-	UNR5216	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1=4k7	SOT-323	16ta	-	3a	Pan
8F	-	UNR9216J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1=4k7	SS-MiniF	18ta	-	3a	Pan
8F	-	ZD5231BN3	Z-diode	5.1V±5%, 20mA, Zzt=17Ω, 300mW	SOT-23	16dc	-	3a	Cys
8F-	-	MMCZ5231BPT	Z-diode	4.845..5.355V, Izt=5mA, Zzt=50Ω, 225mW	SOT-346	16dc	-	3a	Chm
8F5	-	TC598502ECB	LVR-IC	LDO, -8.5V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
8FA	-	BC817-16	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=100..250, >200MHz	SOT-23	16ta	-	3a	Sam
8FA	-	HBC817-16	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=100..250, >200MHz	SOT-23	16ta	-	3a	Hsn
8FB	-	BC817-25	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=160..400, >200MHz	SOT-23	16ta	-	3a	Sam
8FB	-	HBC817-25	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=160..400, >200MHz	SOT-23	16ta	-	3a	Hsn
8FC	-	BC817-40	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=250..630, >200MHz	SOT-23	16ta	-	3a	Sam
8FC	-	CMSZ5231B	Z-diode	5.1V±5%, 20mA, Zzt=17Ω, 275mW	SOT-323	16dc	-	3a	Cen
8FC	-	HBC817-40	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=250..630, >200MHz	SOT-23	16ta	-	3a	Hsn
8G	-	CMBZ5232B	Z-diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 300mW	SOT-23	16dc	-	3a	Mei
8G	-	FDZS5.6LT	Z-diode	5.32..5.88V, Izt=20mA, Zzt=11Ω, 225mW	SOT-23	16dc	-	3a	Fis
8G	-	HMBZ5232B	Z-diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8G	-	LMBZ5232BL	Z-diode	5.32..5.88V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8G	-	MMBZ5232B	Z-diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 225mW	SOT-23	16dc	-	3c	Ons
8G	-	MUN2230	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=1k/1k0	SC-59	16ta	-	3a	Mot
8G	-	MUN5230	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=1k/1k0	SOT-323	16ta	-	3a	Mot
8G	-	R3131N28EA	Vdet-IC	2.8V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
8G	-	SMBZ5232B	Z-diode	5.6V±5%, Izt=20mA, 500mW	SOT-23	16dc	-	3a	Sur



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8G	-	TMPZ5232	Z-diode	5.32..5.88V, Zzt<11Ω, 250mW	SOT-23	16dc	-	3a	All
8G	-	TMPZ5232R	Z-diode	5.32..5.88V, Zzt<11Ω, 250mW	SOT-23	16dr	-	3a	All
8G	-	ZD5232BN3	Z-diode	5.6V±5%, 20mA, Zzt=11Ω, 300mW	SOT-23	16dc	-	3a	Cys
8G-	-	MMCZ5232BPT	Z-diode	5.320..5.880V, Izt=5mA, Zzt=25Ω, 225mW	SOT-346	16dc	-	3a	Chm
8GA	-	BC818-16	Si-npn	AF-Drv, 30V, 500mA, 330mW, B=100..250, >170MHz	SOT-23	16ta	-	3a	Sam
8GB	-	BC818-25	Si-npn	AF-Drv, 30V, 800mA, 310mW, B=160..400, 100MHz	SOT-23	16ta	-	3a	Sam
8GC	-	BC818-40	Si-npn	AF-Drv, 30V, 800mA, 310mW, B=250..630, 100MHz	SOT-23	16ta	-	3a	Sam
8GC	-	CMSZ5232B	Z-diode	5.6V±5%, 20mA, Zzt=11Ω, 275mW	SOT-323	16dc	-	3a	Cen
8H	-	2SA2154-GR	Si-pnp	GP, Amp, 50V, 100mA, 50mW, B=200..400, >80MHz	fSM	19ta	-	3a	Tos
8H	-	CMBZ5233B	Z-diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 300mW	SOT-23	16dc	-	3a	Mei
8H	-	DTC123EE	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/2k2	SOT-416	16ta	-	3a	Ons
8H	-	FDZS6.0LT	Z-diode	5.70..6.30V, Izt=20mA, Zzt=7Ω, 225mW	SOT-23	16dc	-	3a	Fis
8H	-	HMBZ5233B	Z-diode	6V±5%, Izt=20mA, Zzt=7Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8H	-	LMBZ5233BL	Z-diode	5.7..6.3V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8H	-	MMBZ5233B	Z-diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 225mW	SOT-23	16dc	-	3c	Ons
8H	-	MUN2231	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2k2/2k2	SC-59	16ta	-	3a	Mot
8H	-	MUN5231	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2k2/2k2	SOT-323	16ta	-	3a	Mot
8H	-	R3131N38EA	Vdet-IC	3.8V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
8H	-	SMBZ5233B	Z-diode	6V±5%, Izt=20mA, 500mW	SOT-23	16dc	-	3a	Sur
8H	-	TMPZ5233	Z-diode	5.7..6.3V, Zzt<7Ω, 250mW	SOT-23	16dc	-	3a	All
8H	-	TMPZ5233R	Z-diode	5.7..6.3V, Zzt<7Ω, 250mW	SOT-23	16dr	-	3a	All
8H	-	UN2217	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1=22k	SC-59	16ta	-	3a	Pan
8H	-	UN5217	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1=22k	SOT-23	16ta	-	3a	Pan
8H	-	UN9217J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1=22k	SS-MiniF	18ta	-	3a	Pan
8H	-	UNR2217	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1=22k	SC-59	16ta	-	3a	Pan
8H	-	UNR5217	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1=22k	SOT-323	16ta	-	3a	Pan
8H	-	UNR9217J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1=22k	SS-MiniF	18ta	-	3a	Pan
8H	-	ZD5233BN3	Z-diode	6.0V±5%, 20mA, Zzt=7.0Ω, 300mW	SOT-23	16dc	-	3a	Cys
8H-	-	MMCZ5233BPT	Z-diode	5.700..6.300V, Izt=5mA, Zzt=25Ω, 225mW	SOT-346	16dc	-	3a	Chm
8H10	-	SS8PH10	Si-diode	SBR, 100V, 4A, Vf<0.9V(4A)	TO-277A	76dh	-	3o	Vs
8H5	-	TC598602ECB	LVR-IC	LDO, -8.6V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
8H9	-	SS8PH9	Si-diode	SBR, 90V, 4A, Vf<0.9V(4A)	TO-277A	76dh	-	3o	Vs
8HC	-	CMSZ5233B	Z-diode	6.0V±5%, 20mA, Zzt=7.0Ω, 275mW	SOT-323	16dc	-	3a	Cen
8I	-	UN2218	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=510R/5k1	SC-59	16ta	-	3a	Pan
8I	-	UN5218	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=510R/5k1	SOT-23	16ta	-	3a	Pan
8I	-	UN9218J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=510R/5k1	SS-MiniF	18ta	-	3a	Pan
8I	-	UNR2218	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=510R/5k1	SC-59	16ta	-	3a	Pan
8I	-	UNR5218	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=510R/5k1	SOT-323	16ta	-	3a	Pan
8I	-	UNR9218J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=510R/5k1	SS-MiniF	18ta	-	3a	Pan
8J	-	CMBZ5234B	Z-diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 300mW	SOT-23	16dc	-	3a	Mei
8J	-	DTC143EE	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/4k7	SOT-416	16ta	-	3a	Ons
8J	-	FDZS6.2LT	Z-diode	5.89..6.51V, Izt=20mA, Zzt=7Ω, 225mW	SOT-23	16dc	-	3a	Fis
8J	-	HMBZ5234B	Z-diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8J	-	LMBZ5234BL	Z-diode	5.89..6.51V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8J	-	MMBZ5234B	Z-diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 225mW	SOT-23	16dc	-	3c	Ons
8J	-	MUN2232	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4k/4k7	SC-59	16ta	-	3a	Mot
8J	-	MUN5232	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4k/4k7	SOT-323	16ta	-	3a	Mot
8J	-	R3131N48EA	Vdet-IC	4.8V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
8J	-	SMBZ5234B	Z-diode	6.2V±5%, Izt=20mA, 500mW	SOT-23	16dc	-	3a	Sur
8J	-	TMPZ5234	Z-diode	5.98..6.51V, Zzt<7Ω, 250mW	SOT-23	16dc	-	3a	All
8J	-	TMPZ5234R	Z-diode	5.98..6.51V, Zzt<7Ω, 250mW	SOT-23	16dr	-	3a	All
8J	-	ZD5234BN3	Z-diode	6.2V±5%, 20mA, Zzt=7.0Ω, 300mW	SOT-23	16dc	-	3a	Cys
8J-	-	MMCZ5234BPT	Z-diode	5.890..6.510V, Izt=5mA, Zzt=10Ω, 225mW	SOT-346	16dc	-	3a	Chm
8JC	-	CMSZ5234B	Z-diode	6.2V±5%, 20mA, Zzt=7.0Ω, 275mW	SOT-323	16dc	-	3a	Cen
8K	-	CMBZ5235B	Z-diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 300mW	SOT-23	16dc	-	3a	Mei
8K	-	CMBZ5236B	Z-diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 300mW	SOT-23	16dc	-	3a	Mei
8K	-	DTC143ZE	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/47k	SOT-416	16ta	-	3a	Ons
8K	-	FDZS6.8LT	Z-diode	6.46..7.14V, Izt=20mA, Zzt=5Ω, 225mW	SOT-23	16dc	-	3a	Fis
8K	-	HMBZ5235B	Z-diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8K	-	LMBZ5235BL	Z-diode	6.46..7.14V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8K	-	MMBZ5235B	Z-diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 225mW	SOT-23	16dc	-	3c	Ons
8K	-	MUN2233	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4k7/47k	SC-59	16ta	-	3a	Mot
8K	-	MUN5233	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4k7/47k	SOT-323	16ta	-	3a	Mot
8K	-	SMBZ5235B	Z-diode	6.8V±5%, Izt=20mA, 500mW	SOT-23	16dc	-	3a	Sur
8K	-	TMPZ5235	Z-diode	6.46..7.14V, Zzt<5Ω, 250mW	SOT-23	16dc	-	3a	All
8K	-	TMPZ5235R	Z-diode	6.46..7.14V, Zzt<5Ω, 250mW	SOT-23	16dr	-	3a	All
8K	-	UN2219	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=1k/10k	SC-59	16ta	-	3a	Pan
8K	-	UN5219	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=1k/10k	SOT-23	16ta	-	3a	Pan
8K	-	UN9219J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=1k/10k	SS-MiniF	18ta	-	3a	Pan
8K	-	UNR2219	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=1k/10k	SC-59	16ta	-	3a	Pan

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8K	-	UNR5219	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=1k/10k	SOT-323	16ta	-	3a	Pan
8K	-	UNR9219J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=1k/10k	SS-MiniF	18ta	-	3a	Pan
8K	-	ZD5235BN3	Z-diode	6.8V±5%, 20mA, Zzt=5.0Ω, 300mW	SOT-23	16dc	-	3a	Cys
8K-	-	MMCZ5235BPT	Z-diode	6.460..7.140V, Izt=5mA, Zzt=8Ω, 225mW	SOT-346	16dc	-	3a	Chm
8K5	-	TC598702ECB	LVR-IC	LDO, -8.7V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
8KC	-	CMSZ5235B	Z-diode	6.8V±5%, 20mA, Zzt=5.0Ω, 275mW	SOT-323	16dc	-	3a	Cen
8Kp	-	BAP70-05	PIN-diode	Dual RF, 50V, 100mA, 200mW, 0.6pF, 1.4Ω(100mA/100MHz)	SOT-23	16dg	-	3a	PhH
8Kt	-	BAP70-05	PIN-diode	Dual RF, 50V, 100mA, 200mW, 0.6pF, 1.4Ω(100mA/100MHz)	SOT-23	16dg	-	3a	PhM
8KW	-	BAP70-05	PIN-diode	Dual RF, 50V, 100mA, 200mW, 0.6pF, 1.4Ω(100mA/100MHz)	SOT-23	16dg	-	3a	PhC
8L	-	DTC124XE	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	SOT-416	16ta	-	3a	Ons
8L	-	FDZS7.5LT	Z-diode	7.12..7.88V, Izt=20mA, Zzt=6Ω, 225mW	SOT-23	16dc	-	3a	Fis
8L	-	HMBZ5236B	Z-diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8L	-	LMBZ5236BL	Z-diode	7.12..7.88V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8L	-	MMBZ5236B	Z-diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 225mW	SOT-23	16dc	-	3c	Ons
8L	-	MUN2234	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	SC-59	16ta	-	3a	Mot
8L	-	MUN5234	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	SOT-323	16ta	-	3a	Mot
8L	-	SMBZ5236B	Z-diode	7.5V±5%, Izt=20mA, 500mW	SOT-23	16dc	-	3a	Sur
8L	-	TMPZ5236	Z-diode	7.13..7.88V, Zzt<6Ω, 250mW	SOT-23	16dc	-	3a	All
8L	-	TMPZ5236R	Z-diode	7.13..7.88V, Zzt<6Ω, 250mW	SOT-23	16dr	-	3a	All
8L	-	UN5210	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1=47k	SOT-23	16ta	-	3a	Pan
8L	-	UN9210J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1=47k	SS-MiniF	18ta	-	3a	Pan
8L	-	UNR2210	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1=47k	SC-59	16ta	-	3a	Pan
8L	-	UNR3210	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 150MHz, R1=47k	SSSMini3	18ta	-	3a	Pan
8L	-	UNR5210	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1=47k	SOT-323	16ta	-	3a	Pan
8L	-	UNR9210J	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1=47k	SS-MiniF	18ta	-	3a	Pan
8L	-	ZD5236BN3	Z-diode	7.5V±5%, 20mA, Zzt=6.0Ω, 300mW	SOT-23	16dc	-	3a	Cys
8L-	-	MMCZ5236BPT	Z-diode	7.125..7.875V, Izt=5mA, Zzt=7Ω, 225mW	SOT-346	16dc	-	3a	Chm
8L0	-	LN1138A31ANR	LVR-IC	LDO, 3.15V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8L1	-	LN1138A32ANR	LVR-IC	LDO, 3.25V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8L2	-	LN1138A33ANR	LVR-IC	LDO, 3.35V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8L3	-	LN1138A34ANR	LVR-IC	LDO, 3.45V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8L4	-	LN1138A35ANR	LVR-IC	LDO, 3.55V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8L5	-	LN1138A36ANR	LVR-IC	LDO, 3.65V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8L5	-	TC598802ECB	LVR-IC	LDO, -8.8V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
8L6	-	LN1138A37ANR	LVR-IC	LDO, 3.75V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8L7	-	LN1138A38ANR	LVR-IC	LDO, 3.85V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8L8	-	LN1138A39ANR	LVR-IC	LDO, 3.95V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8L9	-	LN1138A40ANR	LVR-IC	LDO, 4.05V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LA	-	LN1138A41ANR	LVR-IC	LDO, 4.15V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LB	-	LN1138A42ANR	LVR-IC	LDO, 4.25V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LC	-	CMSZ5236B	Z-diode	7.5V±5%, 20mA, Zzt=6.0Ω, 275mW	SOT-323	16dc	-	3a	Cen
8LC	-	LN1138A43ANR	LVR-IC	LDO, 4.35V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LD	-	LN1138A44ANR	LVR-IC	LDO, 4.45V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LE	-	LN1138A45ANR	LVR-IC	LDO, 4.55V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LF	-	LN1138A46ANR	LVR-IC	LDO, 4.65V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LH	-	LN1138A47ANR	LVR-IC	LDO, 4.75V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LK	-	LN1138A48ANR	LVR-IC	LDO, 4.85V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LL	-	LN1138A49ANR	LVR-IC	LDO, 4.95V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LM	-	LN1138A50ANR	LVR-IC	LDO, 5.05V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LN	-	LN1138A51ANR	LVR-IC	LDO, 5.15V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LP	-	LN1138A52ANR	LVR-IC	LDO, 5.25V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LR	-	LN1138A53ANR	LVR-IC	LDO, 5.35V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LS	-	LN1138A54ANR	LVR-IC	LDO, 5.45V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LT	-	LN1138A55ANR	LVR-IC	LDO, 5.55V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LU	-	LN1138A56ANR	LVR-IC	LDO, 5.65V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LV	-	LN1138A57ANR	LVR-IC	LDO, 5.75V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LX	-	LN1138A58ANR	LVR-IC	LDO, 5.85V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8LY	-	LN1138A59ANR	LVR-IC	LDO, 5.95V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8M	-	CMBZ5237B	Z-diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 300mW	SOT-23	16dc	-	3a	Mei
8M	-	DTC123JE	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/47k	SOT-416	16ta	-	3a	Ons
8M	-	FDZS8.2LT	Z-diode	7.79..8.61V, Izt=20mA, Zzt=8Ω, 225mW	SOT-23	16dc	-	3a	Fis
8M	-	HMBZ5237B	Z-diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8M	-	LMBZ5237BL	Z-diode	7.79..8.61V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8M	-	MMBZ5237B	Z-diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 225mW	SOT-23	16dc	-	3c	Ons
8M	-	SMBZ5237B	Z-diode	8.2V±5%, Izt=20mA, 500mW	SOT-23	16dc	-	3a	Sur
8M	-	TMPZ5237	Z-diode	7.79..8.61V, Zzt<8Ω, 250mW	SOT-23	16dc	-	3a	All
8M	-	TMPZ5237R	Z-diode	7.79..8.61V, Zzt<8Ω, 250mW	SOT-23	16dr	-	3a	All
8M	-	UN221D	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R2=10k	SC-59	16ta	-	3a	Pan
8M	-	UN521D	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R2=10k	SOT-23	16ta	-	3a	Pan
8M	-	UN921DJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R2=10k	SS-MiniF	18ta	-	3a	Pan



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8M	-	UNR221D	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R2=10k	SC-59	16ta	-	3a	Pan
8M	-	UNR521D	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R2=10k	SOT-323	16ta	-	3a	Pan
8M	-	UNR921DJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R2=10k	SS-MiniF	18ta	-	3a	Pan
8M	-	ZD5237BN3	Z-diode	8.2V±5%, 20mA, Zzt=8.0Ω, 300mW	SOT-23	16dc	-	3a	Cys
8M-	-	MMCZ5237BPT	Z-diode	7.790..8.610V, Izt=5mA, Zzt=7Ω, 225mW	SOT-346	16dc	-	3a	Chm
8M5	-	TC598902ECB	LVR-IC	LDO, -8.9V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
8MC	-	CMSZ5237B	Z-diode	8.2V±5%, 20mA, Zzt=8.0Ω, 275mW	SOT-323	16dc	-	3a	Cen
8N	-	CMBZ5238B	Z-diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 300mW	SOT-23	16dc	-	3a	Mei
8N	-	DTC115EE	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=100k/100k	SOT-416	16ta	-	3a	Ons
8N	-	FDZS8.7LT	Z-diode	8.26..9.14V, Izt=20mA, Zzt=8Ω, 225mW	SOT-23	16dc	-	3a	Fis
8N	-	HMBZ5238B	Z-diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8N	-	LMBZ5238BL	Z-diode	8.26..9.14V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8N	-	MMBZ5238B	Z-diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 225mW	SOT-23	16dc	-	3c	Ons
8N	-	MUN2236	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	SC-59	16ta	-	3a	Mot
8N	-	MUN5236	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	SOT-323	16ta	-	3a	Mot
8N	-	SMBZ5238B	Z-diode	8.7V±5%, Izt=20mA, 500mW	SOT-23	16dc	-	3a	Sur
8N	-	TMPZ5238	Z-diode	8.26..9.14V, Zzt<8Ω, 250mW	SOT-23	16dc	-	3a	All
8N	-	TMPZ5238R	Z-diode	8.26..9.14V, Zzt<8Ω, 250mW	SOT-23	16dr	-	3a	All
8N	-	UN221E	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=47k/22k	SC-59	16ta	-	3a	Pan
8N	-	UN521E	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=47k/22k	SOT-23	16ta	-	3a	Pan
8N	-	UN921EJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=47k/22k	SS-MiniF	18ta	-	3a	Pan
8N	-	UNR221E	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=47k/22k	SC-59	16ta	-	3a	Pan
8N	-	UNR521E	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=47k/22k	SOT-323	16ta	-	3a	Pan
8N	-	UNR921EJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=47k/22k	SS-MiniF	18ta	-	3a	Pan
8N	-	ZD5238BN3	Z-diode	8.7V±5%, 20mA, Zzt=8.0Ω, 300mW	SOT-23	16dc	-	3a	Cys
8N-	-	MMCZ5238BPT	Z-diode	8.265..9.135V, Izt=5mA, Zzt=7Ω, 225mW	SOT-346	16dc	-	3a	Chm
8NC	-	CMSZ5238B	Z-diode	8.7V±5%, 20mA, Zzt=8.0Ω, 275mW	SOT-323	16dc	-	3a	Cen
8O	-	UN221F	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=4k7/10k	SC-59	16ta	-	3a	Pan
8O	-	UN521F	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=4k7/10k	SOT-23	16ta	-	3a	Pan
8O	-	UN921FJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=4k7/10k	SS-MiniF	18ta	-	3a	Pan
8O	-	UNR221F	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=4k7/10k	SC-59	16ta	-	3a	Pan
8O	-	UNR521F	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=4k7/10k	SOT-323	16ta	-	3a	Pan
8O	-	UNR921FJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=4k7/10k	SS-MiniF	18ta	-	3a	Pan
8P	-	CMBZ5239B	Z-diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 300mW	SOT-23	16dc	-	3a	Mei
8P	-	DTC144WE	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/22k	SOT-416	16ta	-	3a	Ons
8P	-	FDZS9.1LT	Z-diode	8.64..9.56V, Izt=20mA, Zzt=10Ω, 225mW	SOT-23	16dc	-	3a	Fis
8P	-	HMBZ5239B	Z-diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8P	-	LMBZ5239BL	Z-diode	8.64..9.56V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8P	-	MMBZ5239B	Z-diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 225mW	SOT-23	16dc	-	3c	Ons
8P	-	MUN2237	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	SC-59	16ta	-	3a	Mot
8P	-	MUN5237	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	SOT-323	16ta	-	3a	Mot
8P	-	SMBZ5239B	Z-diode	9.1V±5%, Izt=20mA, 500mW	SOT-23	16dc	-	3a	Sur
8P	-	TMPZ5239	Z-diode	8.65..9.56V, Zzt<10Ω, 250mW	SOT-23	16dc	-	3a	All
8P	-	TMPZ5239R	Z-diode	8.65..9.56V, Zzt<10Ω, 250mW	SOT-23	16dr	-	3a	All
8P	-	UN221H	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=2k2/10k	SC-59	16ta	-	3a	Pan
8P	-	UN521K	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=10k/4k7	SOT-23	16ta	-	3a	Pan
8P	-	UN921KJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=10k/4k7	SS-MiniF	18ta	-	3a	Pan
8P	-	UNR221H	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=2k2/10k	SC-59	16ta	-	3a	Pan
8P	-	UNR521K	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=10k/4k7	SOT-323	16ta	-	3a	Pan
8P	-	UNR921KJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=10k/4k7	SS-MiniF	18ta	-	3a	Pan
8P	-	ZD5239BN3	Z-diode	9.1V±5%, 20mA, Zzt=10Ω, 300mW	SOT-23	16dc	-	3a	Cys
8P-	-	MMCZ5239BPT	Z-diode	8.645..9.555V, Izt=5mA, Zzt=10Ω, 225mW	SOT-346	16dc	-	3a	Chm
8PC	-	CMSZ5239B	Z-diode	9.1V±5%, 20mA, Zzt=10Ω, 275mW	SOT-323	16dc	-	3a	Cen
8Q	-	CMBZ5240B	Z-diode	10V±5%, Izt=20mA, Zzt=17Ω, 300mW	SOT-23	16dc	-	3a	Mei
8Q	-	FDZS10LT	Z-diode	9.50..10.50V, Izt=20mA, Zzt=17Ω, 225mW	SOT-23	16dc	-	3a	Fis
8Q	-	HMBZ5240B	Z-diode	10V±5%, Izt=20mA, Zzt=17Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8Q	-	LMBZ5240BL	Z-diode	9.5..10.5V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8Q	-	MMBZ5240B	Z-diode	10V±5%, Izt=20mA, Zzt=17Ω, 225mW	SOT-23	16dc	-	3c	Ons
8Q	-	SMBZ5240B	Z-diode	10V±5%, Izt=20mA, 500mW	SOT-23	16dc	-	3a	Sur
8Q	-	TMPZ5240	Z-diode	9.5..10.5V, Zzt<17Ω, 250mW	SOT-23	16dc	-	3a	All
8Q	-	TMPZ5240R	Z-diode	9.5..10.5V, Zzt<17Ω, 250mW	SOT-23	16dr	-	3a	All
8Q	-	UN221L	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=4k7/4k7	SC-59	16ta	-	3a	Pan
8Q	-	UN521L	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=4k7/4k7	SOT-23	16ta	-	3a	Pan
8Q	-	UN921LJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=4k4/4k7	SS-MiniF	18ta	-	3a	Pan
8Q	-	UNR221L	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=4k7/4k7	SC-59	16ta	-	3a	Pan
8Q	-	UNR321L	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 150MHz, R1/R2=4.7k/4.7k	SSSMini3	18ta	-	3a	Pan
8Q	-	UNR521L	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=4k7/4k7	SOT-323	16ta	-	3a	Pan
8Q	-	UNR921LJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=4k4/4k7	SS-MiniF	18ta	-	3a	Pan
8Q	-	ZD5240BN3	Z-diode	10V±5%, 20mA, Zzt=17Ω, 300mW	SOT-23	16dc	-	3a	Cys
8Q-	-	MMCZ5240BPT	Z-diode	9.500..10.50V, Izt=5mA, Zzt=15Ω, 225mW	SOT-346	16dc	-	3a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8QC	-	CMSZ5240B	Z-diode	10V±5%, 20mA, Zzt=17Ω, 275mW	SOT-323	16dc	-	3a	Cen
8R	-	CMBZ5241B	Z-diode	11V±5%, Izt=20mA, Zzt=22Ω, 300mW	SOT-23	16dc	-	3a	Mei
8R	-	FDZS11LT	Z-diode	10.4..11.55V, Izt=20mA, Zzt=22Ω, 225mW	SOT-23	16dc	-	3a	Fis
8R	-	HMBZ5241B	Z-diode	11V±5%, Izt=20mA, Zzt=22Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8R	-	LMBZ5241BL	Z-diode	10.4..11.55V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8R	-	MMBZ5241B	Z-diode	11V±5%, Izt=20mA, Zzt=22Ω, 225mW	SOT-23	16dc	-	3c	Ons
8R	-	SMBZ5241B	Z-diode	11V±5%, Izt=20mA, 500mW	SOT-23	16dc	-	3a	Sur
8R	-	TMPZ5241	Z-diode	10.5..11.6V, Zzt<22Ω, 250mW	SOT-23	16dc	-	3a	All
8R	-	TMPZ5241R	Z-diode	10.5..11.6V, Zzt<22Ω, 250mW	SOT-23	16dr	-	3a	All
8R	-	ZD5241BN3	Z-diode	11V±5%, 20mA, Zzt=22Ω, 300mW	SOT-23	16dc	-	3a	Cys
8R-	-	MMCZ5241BPT	Z-diode	10.45..11.55V, Izt=5mA, Zzt=18Ω, 225mW	SOT-346	16dc	-	3a	Chm
8RC	-	CMSZ5241B	Z-diode	11V±5%, 20mA, Zzt=22Ω, 275mW	SOT-323	16dc	-	3a	Cen
8S	-	CMBZ5242B	Z-diode	12V±5%, Izt=20mA, Zzt=30Ω, 300mW	SOT-23	16dc	-	3a	Mei
8S	-	FDZS12LT	Z-diode	11.40..12.60V, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3a	Fis
8S	-	HMBZ5242B	Z-diode	12V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8S	-	LMBZ5242BL	Z-diode	11.4..12.6V, Izt=20mA, 225mW	SOT-23	16dc	-	3c	Lrc
8S	-	MMBZ5242B	Z-diode	12V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3c	Ons
8S	-	SMBZ5242B	Z-diode	12V±5%, Izt=20mA, 500mW	SOT-23	16dc	-	3a	Sur
8S	-	TMPZ5242	Z-diode	11.4., 12.6V, Zzt<30Ω, 250mW	SOT-23	16dc	-	3a	All
8S	-	TMPZ5242R	Z-diode	11.4., 12.6V, Zzt<30Ω, 250mW	SOT-23	16dr	-	3a	All
8S	-	ZD5242BN3	Z-diode	12V±5%, 20mA, Zzt=30Ω, 300mW	SOT-23	16dc	-	3a	Cys
8S-	-	MMCZ5242BPT	Z-diode	11.40..12.60V, Izt=5mA, Zzt=22Ω, 225mW	SOT-346	16dc	-	3a	Chm
8SC	-	CMSZ5242B	Z-diode	12V±5%, 20mA, Zzt=30Ω, 275mW	SOT-323	16dc	-	3a	Cen
8T	-	CMBZ5243B	Z-diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 300mW	SOT-23	16dc	-	3a	Mei
8T	-	DTC144T	Si-npn-Digi	Sw, 50V, 100mA, 230mW, 250MHz, R1=47k	SC-59	16ta	-	3a	Ons
8T	-	DTC144TY3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=47k	SOT-723	18ta	-	3a	Cys
8T	-	FDZS13LT	Z-diode	12.35..13.65V, Izt=9.5mA, Zzt=13Ω, 225mW	SOT-23	16dc	-	3a	Fis
8T	-	HMBZ5243B	Z-diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8T	-	LMBZ5243BL	Z-diode	12.35..13.65V, Izt=9.5mA, 225mW	SOT-23	16dc	-	3c	Lrc
8T	-	MMBZ5243B	Z-diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 225mW	SOT-23	16dc	-	3c	Ons
8T	-	MUN2240	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=47k	SC-59	16ta	-	3a	Mot
8T	-	SMBZ5243B	Z-diode	13V±5%, Izt=9.5mA, 500mW	SOT-23	16dc	-	3a	Sur
8T	-	TMPZ5243	Z-diode	12.4..13.7V, Zzt<13Ω, 250mW	SOT-23	16dc	-	3a	All
8T	-	TMPZ5243R	Z-diode	12.4..13.7V, Zzt<13Ω, 250mW	SOT-23	16dr	-	3a	All
8T	-	ZD5243BN3	Z-diode	13V±5%, 9.5mA, Zzt=13Ω, 300mW	SOT-23	16dc	-	3a	Cys
8T-	-	MMCZ5243BPT	Z-diode	12.35..13.65V, Izt=5mA, Zzt=25Ω, 225mW	SOT-346	16dc	-	3a	Chm
8TC	-	CMSZ5243B	Z-diode	13V±5%, 9.5mA, Zzt=13Ω, 275mW	SOT-323	16dc	-	3a	Cen
8U	-	CMBZ5244B	Z-diode	14V±5%, Izt=9.0mA, Zzt=15Ω, 300mW	SOT-23	16dc	-	3a	Mei
8U	-	FDZS14LT	Z-diode	13.30..14.70V, Izt=9mA, Zzt=15Ω, 225mW	SOT-23	16dc	-	3a	Fis
8U	-	HMBZ5244B	Z-diode	14V±5%, Izt=9mA, Zzt=15Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8U	-	LMBZ5244BL	Z-diode	13.3..14.7V, Izt=9mA, 225mW	SOT-23	16dc	-	3c	Lrc
8U	-	MMBZ5244B	Z-diode	14V±5%, Izt=9.0mA, Zzt=15Ω, 225mW	SOT-23	16dc	-	3c	Ons
8U	-	MUN2241	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=100k	SC-59	16ta	-	3a	Mot
8U	-	SMBZ5244B	Z-diode	14V±5%, Izt=9.0mA, 500mW	SOT-23	16dc	-	3a	Sur
8U	-	TMPZ5244	Z-diode	13.3..14.7V, Zzt<15Ω, 250mW	SOT-23	16dc	-	3a	All
8U	-	TMPZ5244R	Z-diode	13.3..14.7V, Zzt<15Ω, 250mW	SOT-23	16dr	-	3a	All
8U	-	ZD5244BN3	Z-diode	14V±5%, 9mA, Zzt=15Ω, 300mW	SOT-23	16dc	-	3a	Cys
8U-	-	MMCZ5244BPT	Z-diode	13.30..14.70V, Izt=5mA, Zzt=25Ω, 225mW	SOT-346	16dc	-	3a	Chm
8UC	-	CMSZ5244B	Z-diode	14V±5%, 9.0mA, Zzt=15Ω, 275mW	SOT-323	16dc	-	3a	Cen
8V	-	CMBZ5245B	Z-diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 300mW	SOT-23	16dc	-	3a	Mei
8V	-	FDZS15LT	Z-diode	14.25..15.75V, Izt=8.5mA, Zzt=16Ω, 225mW	SOT-23	16dc	-	3a	Fis
8V	-	HMBZ5245B	Z-diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8V	-	LMBZ5245BL	Z-diode	14.25..15.75V, Izt=8.5mA, 225mW	SOT-23	16dc	-	3c	Lrc
8V	-	MMBZ5245B	Z-diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 225mW	SOT-23	16dc	-	3c	Ons
8V	-	SMBZ5245B	Z-diode	15V±5%, Izt=8.50mA, 500mW	SOT-23	16dc	-	3a	Sur
8V	-	TMPZ5245	Z-diode	14.3..15.8V, Zzt<16Ω, 250mW	SOT-23	16dc	-	3a	All
8V	-	TMPZ5245R	Z-diode	14.3..15.8V, Zzt<16Ω, 250mW	SOT-23	16dr	-	3a	All
8V	-	ZD5245BN3	Z-diode	15V±5%, 8.5mA, Zzt=16Ω, 300mW	SOT-23	16dc	-	3a	Cys
8V-	-	MMCZ5245BPT	Z-diode	14.25..15.75V, Izt=5mA, Zzt=32Ω, 225mW	SOT-346	16dc	-	3a	Chm
8V2	-	CHPZ8V2PT	Z-diode	Dual, 7.7..8.7V, Izt=5mA, Zzt=15Ω, 350mW	SOT-23	16df	-	3a	Chm
8V2	-	PZM8.2NB	Z-diode	8.2V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
8V7	-	CHPZ8V7PT	Z-diode	Dual, 8.2..9.2V, Izt=5mA, Zzt=15Ω, 350mW	SOT-23	16df	-	3a	Chm
8V9	-	LN1138A102NR	LVR-IC	LDO, 1.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VA	-	LN1138A112NR	LVR-IC	LDO, 1.1V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VB	-	LN1138A122NR	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VC	-	CMSZ5245B	Z-diode	15V±5%, 8.5mA, Zzt=16Ω, 275mW	SOT-323	16dc	-	3a	Cen
8VC	-	LN1138A132NR	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VD	-	LN1138A142NR	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VE	-	LN1138A152NR	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VF	-	LN1138A162NR	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8VH	-	LN1138A172NR	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VK	-	LN1138A182NR	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VL	-	LN1138A192NR	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VM	-	LN1138A202NR	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VN	-	LN1138A212NR	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VP	-	LN1138A222NR	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VR	-	LN1138A232NR	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VS	-	LN1138A242NR	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VT	-	LN1138A252NR	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VU	-	LN1138A262NR	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VV	-	LN1138A272NR	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VX	-	LN1138A282NR	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VY	-	LN1138A292NR	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8VZ	-	LN1138A302NR	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
8W	-	CMBZ5246B	Z-diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 300mW	SOT-23	16dc	-	3a	Mei
8W	-	FDZS16LT	Z-diode	15.20..16.80V, Izt=7.8mA, Zzt=17Ω, 225mW	SOT-23	16dc	-	3a	Fis
8W	-	HMBZ5246B	Z-diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8W	-	LMBZ5246BL	Z-diode	15.2..16.8V, Izt=7.8mA, 225mW	SOT-23	16dc	-	3c	Lrc
8W	-	MMBZ5246B	Z-diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 225mW	SOT-23	16dc	-	3c	Ons
8W	-	SMBZ5246B	Z-diode	16V±5%, Izt=7.8mA, 500mW	SOT-23	16dc	-	3a	Sur
8W	-	TMPZ5246	Z-diode	15.2..16.8V, Zzt<17Ω, 250mW	SOT-23	16dc	-	3a	All
8W	-	TMPZ5246R	Z-diode	15.2..16.8V, Zzt<17Ω, 250mW	SOT-23	16dr	-	3a	All
8W	-	ZD5246BN3	Z-diode	16V±5%, 7.8mA, Zzt=17Ω, 300mW	SOT-23	16dc	-	3a	Cys
8W-	-	MMCZ5246BPT	Z-diode	15.20..16.80V, Izt=5mA, Zzt=36Ω, 225mW	SOT-346	16dc	-	3a	Chm
8WC	-	CMSZ5246B	Z-diode	16V±5%, 7.8mA, Zzt=17Ω, 275mW	SOT-323	16dc	-	3a	Cen
8X	-	CMBZ5247B	Z-diode	17V±5%, Izt=7.4mA, Zzt=19Ω, 300mW	SOT-23	16dc	-	3a	Mei
8X	-	FDZS17LT	Z-diode	16.15..17.85V, Izt=7.4mA, Zzt=19Ω, 225mW	SOT-23	16dc	-	3a	Fis
8X	-	HMBZ5247B	Z-diode	17V±5%, Izt=7.4mA, Zzt=19Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8X	-	LMBZ5247BL	Z-diode	16.15..17.85V, Izt=7.4mA, 225mW	SOT-23	16dc	-	3c	Lrc
8X	-	MMBZ5247B	Z-diode	17V±5%, Izt=8.0mA, Zzt=19Ω, 225mW	SOT-23	16dc	-	3c	Ons
8X	-	SMBZ5247B	Z-diode	17V±5%, Izt=7.4mA, 500mW	SOT-23	16dc	-	3a	Sur
8X	-	TMPZ5247	Z-diode	16.2..,17.9V, Zzt<19Ω, 250mW	SOT-23	16dc	-	3a	All
8X	-	TMPZ5247R	Z-diode	16.2..,17.9V, Zzt<19Ω, 250mW	SOT-23	16dr	-	3a	All
8X	-	UNR921AJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=100k/100k	SS-MiniF	18ta	-	3a	Pan
8X	-	ZD5247BN3	Z-diode	17V±5%, 7.4mA, Zzt=19Ω, 300mW	SOT-23	16dc	-	3a	Cys
8X-	-	MMCZ5247BPT	Z-diode	16.15..17.85V, Izt=5mA, Zzt=36Ω, 225mW	SOT-346	16dc	-	3a	Chm
8XC	-	CMSZ5247B	Z-diode	17V±5%, 7.4mA, Zzt=19Ω, 275mW	SOT-323	16dc	-	3a	Cen
8Y	-	CMBZ5248B	Z-diode	18V±5%, Izt=7.0mA, Zzt=21Ω, 300mW	SOT-23	16dc	-	3a	Mei
8Y	-	FDZS18LT	Z-diode	17.10..18.90V, Izt=7mA, Zzt=21Ω, 225mW	SOT-23	16dc	-	3a	Fis
8Y	-	HMBZ5248B	Z-diode	18V±5%, Izt=7mA, Zzt=21Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8Y	-	LMBZ5248BL	Z-diode	17.1..18.9V, Izt=7mA, 225mW	SOT-23	16dc	-	3c	Lrc
8Y	-	MMBZ5248B	Z-diode	18V±5%, Izt=7.0mA, Zzt=23Ω, 225mW	SOT-23	16dc	-	3c	Ons
8Y	-	SMBZ5248B	Z-diode	18V±5%, Izt=7.0mA, 500mW	SOT-23	16dc	-	3a	Sur
8Y	-	TMPZ5248	Z-diode	17.1..18.9V, Zzt<21Ω, 250mW	SOT-23	16dc	-	3a	All
8Y	-	TMPZ5248R	Z-diode	17.1..18.9V, Zzt<21Ω, 250mW	SOT-23	16dr	-	3a	All
8Y	-	UNR921BJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1=100k	SS-MiniF	18ta	-	3a	Pan
8Y	-	ZD5248BN3	Z-diode	18V±5%, 7mA, Zzt=21Ω, 300mW	SOT-23	16dc	-	3a	Cys
8Y-	-	MMCZ5248BPT	Z-diode	17.10..18.90V, Izt=5mA, Zzt=42Ω, 225mW	SOT-346	16dc	-	3a	Chm
8YC	-	CMSZ5248B	Z-diode	18V±5%, 7.0mA, Zzt=21Ω, 275mW	SOT-323	16dc	-	3a	Cen
8Z	-	CMBZ5249B	Z-diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 300mW	SOT-23	16dc	-	3a	Mei
8Z	-	FDZS19LT	Z-diode	18.05..19.95V, Izt=6.6mA, Zzt=23Ω, 225mW	SOT-23	16dc	-	3a	Fis
8Z	-	HMBZ5249B	Z-diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 225mW	SOT-23	16dc	-	3a	Hsn
8Z	-	LMBZ5249BL	Z-diode	18.05..19.95V, Izt=6.6mA, 225mW	SOT-23	16dc	-	3c	Lrc
8Z	-	MMBZ5249B	Z-diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 225mW	SOT-23	16dc	-	3c	Ons
8Z	-	SMBZ5249B	Z-diode	19V±5%, Izt=6.6mA, 500mW	SOT-23	16dc	-	3a	Sur
8Z	-	TMPZ5249	Z-diode	18.1..20V, Zzt<23Ω, 250mW	SOT-23	16dc	-	3a	All
8Z	-	TMPZ5249R	Z-diode	18.1..20V, Zzt<23Ω, 250mW	SOT-23	16dr	-	3a	All
8Z	-	UNR921CJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R2=47k	SS-MiniF	18ta	-	3a	Pan
8Z	-	ZD5249BN3	Z-diode	19V±5%, 6.6mA, Zzt=23Ω, 300mW	SOT-23	16dc	-	3a	Cys
8Z-	-	MMCZ5249BPT	Z-diode	18.05..19.95V, Izt=5mA, Zzt=42Ω, 225mW	SOT-346	16dc	-	3a	Chm
8Z2	-	CZ1W8V2	Z-diode	8.2V±5%, Izt=31mA, 600mW	SOT-23	16dc	-	3a	Cdi
8ZC	-	CMSZ5249B	Z-diode	19V±5%, 6.6mA, Zzt=23Ω, 275mW	SOT-323	16dc	-	3a	Cen
9	cr	ELM7551NEB	Vdet-IC	5.1V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
9	cs	ELM7551CEB	Vdet-IC	5.1V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
9.1	-	TZT9.1W	Z-diode	8.50..9.60V, Izt=5mA, Zzt=18Ω, 200mW	SOT-23	16dc	-	3a	Ttr
9.1	-	Z02W9.1V	Z-diode	8.50..9.60V, Izt=5mA, Zzt=18Ω, 200mW	SOT-23	16dc	-	3f	Kec
9.1G	-	ZD9.1G-AE3	Z-diode	9.1V±5%, Zzt=30Ω, Izt=5mA, 225mW, Halogen free	SOT-23	16dq	-	3a	Utc
9.1H	-	BZX84C9V1-V	Z-diode	8.80..9.30V, Izt=5mA, Zzt=18Ω, 300mW	SOT-23	16dc	-	3f	Kec
9.1H	-	MAZ3091-H	Z-diode	8.5..9.6V, If=100mA, Zzt=15Ω, 200mW	SC-59	16dc	-	3a	Pan
9.1K	-	MAZ3091WK	Z-diode	Dual, 9.1V, If=100mA, Zzt=15Ω, 200mW	SC-59	16dg	-	3a	Pan



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9.1L	-	MAZ3091-L	Z-diode	8.5..9.6V, If=100mA, Zzt=15Ω, 200mW	SC-59	16dc	-	3a	Pan
9.1L	-	ZD9.1L-AE3	Z-diode	9.1V±5%, Zzt=30Ω, Izt=5mA, 225mW, Lead free	SOT-23	16dq	-	3a	Utc
9.1M	-	MAZ3091-M	Z-diode	8.5..9.6V, If=100mA, Zzt=15Ω, 200mW	SC-59	16dc	-	3a	Pan
9.1X	-	TZT9.1XW	Z-diode	8.50..9.0V, Izt=5mA, Zzt=18Ω, 200mW	SOT-23	16dc	-	3a	Ttr
9.1X	-	Z02W9.1VX	Z-diode	8.50..9.0V, Izt=5mA, Zzt=18Ω, 200mW	SOT-23	16dc	-	3f	Kec
9.1Y	-	TZT9.1YW	Z-diode	8.80..9.30V, Izt=5mA, Zzt=18Ω, 200mW	SOT-23	16dc	-	3a	Ttr
9.1Y	-	Z02W9.1VY	Z-diode	8.80..9.30V, Izt=5mA, Zzt=18Ω, 200mW	SOT-23	16dc	-	3f	Kec
9.1Z	-	TZT9.1ZW	Z-diode	9.10..9.60V, Izt=5mA, Zzt=18Ω, 200mW	SOT-23	16dc	-	3a	Ttr
9.1Z	-	Z02W9.1VZ	Z-diode	9.10..9.60V, Izt=5mA, Zzt=18Ω, 200mW	SOT-23	16dc	-	3f	Kec
9•1X	-	02CZ9.1-X	Z-diode	8.5..9V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
9•1Y	-	02CZ9.1-Y	Z-diode	8.8..9.3V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
9•1Z	-	02CZ9.1-Z	Z-diode	9.1..9.6V, Izt=5mA, 200mW	SC-59	16dc	-	3a	Tos
90	-	AP8822N-60GA	Vdet-IC	6.0V±2%, -Reset ODO, 200ms, Halogen-fre	SOT-23	16vdc	VD6	3bb	Anw
90	-	AP8822N-60GT	Vdet-IC	6.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-70	16vdc	VD6	3bb	Anw
90	-	AP8822N-60PA	Vdet-IC	6.0V±2%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Anw
90	-	AP8822N-60PT	Vdet-IC	6.0V±2%, -Reset ODO, 200ms	SC-70	16vdc	VD6	3b	Anw
90	-	CHDTA124XMPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=22k/47k	SOT-723	18ta	-	3a	Chm
90	cq	ELM7540NBB	Vdet-IC	4.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
90	ct	ELM7540CBB	Vdet-IC	4.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
90T	-	TK71590AS	LVR-IC	LDO, 9V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
91	-	2SK300-1	n-FET	GP, LN, 55V, 50mA, 150mW, Idss=9.5..14.8mA, Up<2V	SOT-23	16fa	-	3a	Pan
91	-	BZB784-C2V4	Z-diode	Dual, 2.4V±5%, Zzt=70Ω, 350mW	SOT-323	16df	-	3a	Phi
91	-	BZB984-C2V4	Z-diode	Dual, 2.4V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
91	-	CHDTA143EMPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/4.7k	SOT-723	18ta	-	3a	Chm
91	-	DTA113TKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=1k	SOT-346	16ta	-	3a	Rhm
91	cq	ELM7541NBB	Vdet-IC	4.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
91	ct	ELM7541CBB	Vdet-IC	4.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
910	-	HZM9.1NB	Z-diode	8.56..9.55V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
911	-	HZM9.1NB1	Z-diode	8.56..8.93V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
911	-	PZM9.1NB1	Z-diode	9.1V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
912	-	HZM9.1NB2	Z-diode	8.85..9.23V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
912	-	PZM9.1NB2	Z-diode	9.1V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
913	-	HZM9.1NB3	Z-diode	9.15..9.55V, Izt=5mA, 200mW	SC-59A	16dc	-	3a	Ren
913	-	PZM9.1NB3	Z-diode	9.1V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
91A	-	FMMT591A	Si-pnp	AF, 80V, 1A, 500mW, B=100..300, >150MHz	SOT-23	16ta	-	3a	Zx
92	-	2SK300-2	n-FET	GP, LN, 55V, 50mA, 150mW, Idss=13.4..21mA, Up<2V	SOT-23	16fa	-	3a	Pan
92	-	BZB784-C2V7	Z-diode	Dual, 2.7V±5%, Zzt=75Ω, 350mW	SOT-323	16df	-	3a	Phi
92	-	BZB984-C2V7	Z-diode	Dual, 2.7V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
92	-	CHDTA143XMPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/10k	SOT-723	18ta	-	3a	Chm
92	cq	ELM7542NBB	Vdet-IC	4.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
92	ct	ELM7542CBB	Vdet-IC	4.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
924	-	TMPD6924	Si-diode	Schottky, 70V, 500mA, Vf<0.40V(1mA), Cd<1.7pF	SOT-23	16dc	-	3a	All
926	-	KTF809T-2.63	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Icm
929	-	KTF809T-2.93	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Icm
93	-	2SK300-3	n-FET	GP, LN, 55V, 50mA, 150mW, Idss=19..30.2mA, Up<2V	SOT-23	16fa	-	3a	Pan
93	-	BZB784-C3V0	Z-diode	Dual, 3V±5%, Zzt=80Ω, 350mW	SOT-323	16df	-	3a	Phi
93	-	BZB984-C3V0	Z-diode	Dual, 3.0V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
93	-	CHDTA143ZMPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/47k	SOT-723	18ta	-	3a	Chm
93	-	DTA143TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=4k7	SOT-416	16ta	-	3a	Rhm
93	-	DTA143TKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4k7	SOT-346	16ta	-	3a	Rhm
93	-	DTA143TM	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=4k7	VMT3	18ta	-	3a	Rhm
93	-	DTA143TUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4k7	UMT3	16ta	-	3a	Rhm
93	cq	ELM7543NBB	Vdet-IC	4.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
93	ct	ELM7543CBB	Vdet-IC	4.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
930	-	KTF809T-3.08	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Icm
94	-	2SK300-4	n-FET	GP, LN, 55V, 50mA, 150mW, Idss=27.4..42mA, Up<2V	SOT-23	16fa	-	3a	Pan
94	-	BZB784-C3V3	Z-diode	Dual, 3.3V±5%, Zzt=85Ω, 350mW	SOT-323	16df	-	3a	Phi
94	-	BZB984-C3V3	Z-diode	Dual, 3.3V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
94	-	CHDTA144EMPT	Si-pnp-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/47k	SOT-723	18ta	-	3a	Chm
94	-	DTA114TE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	SOT-416	16ta	-	3a	Rhm
94	-	DTA114TEB	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	EMT3F	18ta	-	3a	Rhm
94	-	DTA114TKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	SOT-346	16ta	-	3a	Rhm
94	-	DTA114TM	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	VMT3	18ta	-	3a	Rhm
94	-	DTA114TUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	SOT-323	16ta	-	3a	Rhm
94	-	DTA114TUB	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	UMT3F	18ta	-	3a	Rhm
94	cq	ELM7544NBB	Vdet-IC	4.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
94	ct	ELM7544CBB	Vdet-IC	4.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
940	-	KTF809T-4.00	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Icm
943	-	KTF809T-4.38	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Icm
946	-	KTF809T-4.63	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Icm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
95	-	BZB784-C3V6	Z-diode	Dual, 3.6V±5%, Zzt=85Ω, 350mW	SOT-323	16df	-	3a	Phi
95	-	BZB984-C3V6	Z-diode	Dual, 3.6V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
95	-	CHDTA144WMPT	Si-pnp-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/22k	SOT-723	18ta	-	3a	Chm
95	-	DTA124TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R2=22k	SOT-416	16ta	-	3a	Rhm
95	-	DTA124TKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=22k	SOT-346	16ta	-	3a	Rhm
95	-	DTA124TM	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R2=22k	VMT3	18ta	-	3a	Rhm
95	-	DTA124TUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=22k	UMT3	18ta	-	3a	Rhm
95	cq	ELM7545NBB	Vdet-IC	4.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
95	ct	ELM7545CBB	Vdet-IC	4.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
96	-	BZB784-C3V9	Z-diode	Dual, 3.9V±5%, Zzt=85Ω, 350mW	SOT-323	16df	-	3a	Phi
96	-	BZB984-C3V9	Z-diode	Dual, 3.9V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
96	-	CHDTA144VMPT	Si-pnp-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/10k	SOT-723	18ta	-	3a	Chm
96	-	DTA144TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=47k	SOT-416	16ta	-	3a	Rhm
96	-	DTA144TKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=47k	SOT-346	16ta	-	3a	Rhm
96	-	DTA144TM	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=47k	VMT3	18ta	-	3a	Rhm
96	-	DTA144TUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=47k	UMT3	16ta	-	3a	Rhm
96	-	DTC144TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=47k	SOT-416	16ta	-	3a	Rhm
96	-	DTC144TKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=47k	SOT-346	16ta	-	3a	Rhm
96	-	DTC144TM	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=47k	VMT3	18ta	-	3a	Rhm
96	-	DTC144TUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=47k	UMT3	16ta	-	3a	Rhm
96	cq	ELM7546NBB	Vdet-IC	4.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
96	ct	ELM7546CBB	Vdet-IC	4.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
97	-	BZB784-C4V3	Z-diode	Dual, 4.3V±5%, Zzt=80Ω, 350mW	SOT-323	16df	-	3a	Phi
97	-	BZB984-C4V3	Z-diode	Dual, 4.3V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
97	cq	ELM7547NBB	Vdet-IC	4.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
97	ct	ELM7547CBB	Vdet-IC	4.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
98	-	BZB784-C4V7	Z-diode	Dual, 4.7V±5%, Zzt=50Ω, 350mW	SOT-323	16df	-	3a	Phi
98	-	BZB984-C4V7	Z-diode	Dual, 4.7V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
98	cq	ELM7548NBB	Vdet-IC	4.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
98	ct	ELM7548CBB	Vdet-IC	4.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
99	-	BZB784-C5V1	Z-diode	Dual, 5.1V±5%, Zzt=40Ω, 350mW	SOT-323	16df	-	3a	Phi
99	-	BZB984-C5V1	Z-diode	Dual, 5.1V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
99	-	DTA115TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=100k	SOT-416	16ta	-	3a	Rhm
99	-	DTA115TKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=100k	SOT-346	16ta	-	3a	Rhm
99	-	DTA115TM	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=100k	VMT3	18ta	-	3a	Rhm
99	-	DTA115TUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=100k	UMT3	16ta	-	3a	Rhm
99	cq	ELM7549NBB	Vdet-IC	4.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
99	ct	ELM7549CBB	Vdet-IC	4.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
9A	-	2SC5938A-A	Si-npn	AF, Sw, 50V, 200mA, 150mW, 30MHz, B=200..700	SC-59	16ta	-	3a	Ish
9A	-	2SC5996A-A	Si-npn	AF, Sw, 50V, 200mA, 150mW, 30MHz, B=200..700	SOT-323	16ta	-	3a	Ish
9A	-	BZB784-C5V6	Z-diode	Dual, 5.6V±5%, Zzt=15Ω, 350mW	SOT-323	16df	-	3a	Phi
9A	-	BZB984-C5V6	Z-diode	Dual, 5.6V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
9A	-	DTA125TKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=200k	SOT-346	16ta	-	3a	Rhm
9A	-	DTA125TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B=100..600, >250MHz, R1=200k	SOT-323	16ta	-	3a	Rhm
9A	-	DTA125TUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=200k	UMT3	16ta	-	3a	Rhm
9A	-	FMMT2369AR	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120	SOT-23	16ta	-	3a	Zx
9A	-	R3131N19EC	Vdet-IC	1.9V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
9A	-	UN2221	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=2k2/2k2	SC-59	16ta	-	3a	Pan
9A	-	UNR2221	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=2k2/2k2	SC-59	16ta	-	3a	Pan
9A1	-	MMBZ9V1A	TVS	Dual, Vrwm=6.0V, Vbr=8.65..9.56V, 1.7A, 24W(1ms)	SOT-23	16dg	-	3a	Wtr
9A1	-	PZM9.1NB2A	Z-diode	Dual, 9.1V±2.5%, If=200mA, 300mW	SOT-346	16df	-	3a	Phi
9A5	-	TC599002ECB	LVR-IC	LDO, -9.0V±2%, 200mA	SOT-23	16cj	VR2	3d	Mcc
9AA	-	BC856A	Si-pnp	GP, 80V, 100mA, 310mW, B=125..250, >150MHz	SOT-23	16ta	-	3a	Sam
9AA	-	STM1810L	Vdet-IC	4.62V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Ste
9AB	-	BC856B	Si-pnp	GP, 80V, 100mA, 310mW, B=220..475, >150MHz	SOT-23	16ta	-	3a	Sam
9AB	-	STM1810M	Vdet-IC	4.37V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Ste
9AC	-	BC856C	Si-pnp	GP, 80V, 100mA, 310mW, B=420..800, >150MHz	SOT-23	16ta	-	3a	Sam
9AH	-	STM1811L	Vdet-IC	4.62V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3b	Ste
9AJ	-	STM1811M	Vdet-IC	4.37V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3b	Ste
9Ap	-	PMMT491A	Si-npn	AF, 80V, 1A, 250mW, B=300..900, >150MHz	SOT-23	16ta	-	3a	PhH
9AQ	-	STM1812L	Vdet-IC	4.62V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Ste
9AR	-	STM1812M	Vdet-IC	4.37V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Ste
9At	-	PMMT491A	Si-npn	AF, 80V, 1A, 250mW, B=300..900, >150MHz	SOT-23	16ta	-	3a	PhM
9AW	-	PMMT491A	Si-npn	AF, 80V, 1A, 250mW, B=300..900, >150MHz	SOT-23	16ta	-	3a	PhC
9AX	-	STM1813L	Vdet-IC	4.62V±1.5%, +Reset ODO	SOT-23	16vda	VD6	3b	Ste
9AY	-	STM1813M	Vdet-IC	4.37V±1.5%, +Reset ODO	SOT-23	16vda	VD6	3b	Ste
9B	-	2SC5938A-B	Si-npn	AF, Sw, 50V, 200mA, 150mW, 30MHz, B=350..1200	SC-59	16ta	-	3a	Ish
9B	-	2SC5996A-B	Si-npn	AF, Sw, 50V, 200mA, 150mW, 30MHz, B=350..1200	SOT-323	16ta	-	3a	Ish
9B	-	BZB784-C6V2	Z-diode	Dual, 6.2V±5%, Zzt=6Ω, 350mW	SOT-323	16df	-	3a	Phi
9B	-	BZB984-C6V2	Z-diode	Dual, 6.2V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9B	-	R3131N29EC	Vdet-IC	2.9V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
9B	-	UN2222	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=4k4/4k7	SC-59	16ta	-	3a	Pan
9B	-	UNR2222	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=4k4/4k7	SC-59	16ta	-	3a	Pan
9BA	-	BC857A	Si-pnp	GP, 50V, 100mA, 310mW, B=110..220, >150MHz	SOT-23	16ta	-	3a	Sam
9BB	-	BC857B	Si-pnp	GP, 50V, 100mA, 310mW, B=220..475, >150MHz	SOT-23	16ta	-	3a	Sam
9BC	-	BC857C	Si-pnp	GP, 50V, 100mA, 310mW, B=420..800, >150MHz	SOT-23	16ta	-	3a	Sam
9BG	-	STM1815T	Vdet-IC	3.06V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Ste
9BH	-	STM1815S	Vdet-IC	2.88V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Ste
9BJ	-	STM1815R	Vdet-IC	2.55V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Ste
9Bp	-	PMMT591A	Si-pnp	AF, 80V, 1A, 250mW, B=300..800, >150MHz	SOT-23	16ta	-	3a	PhH
9BP	-	STM1816T	Vdet-IC	3.06V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3b	Ste
9BQ	-	STM1816S	Vdet-IC	2.88V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3b	Ste
9BR	-	STM1816R	Vdet-IC	2.55V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3b	Ste
9Bt	-	PMMT591A	Si-pnp	AF, 80V, 1A, 250mW, B=300..800, >150MHz	SOT-23	16ta	-	3a	PhM
9BW	-	PMMT591A	Si-pnp	AF, 80V, 1A, 250mW, B=300..800, >150MHz	SOT-23	16ta	-	3a	PhC
9BW	-	STM1817T	Vdet-IC	3.06V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Ste
9BX	-	STM1817S	Vdet-IC	2.88V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Ste
9BY	-	STM1817R	Vdet-IC	2.55V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Ste
9C	-	BZB784-C6V8	Z-diode	Dual, 6.8V±5%, Zzt=6Ω, 350mW	SOT-323	16df	-	3a	Phi
9C	-	BZB984-C6V8	Z-diode	Dual, 6.8V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
9C	-	R3131N39EC	Vdet-IC	3.9V±1.5%, +Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
9C	-	UN2223	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=10k/10k	SC-59	16ta	-	3a	Pan
9C	-	UNR2223	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=10k/10k	SC-59	16ta	-	3a	Pan
9CA	-	BC858A	Si-pnp	GP, 30V, 100mA, 310mW, B=110..220, >150MHz	SOT-23	16ta	-	3a	Sam
9CB	-	BC858B	Si-pnp	GP, 30V, 100mA, 310mW, B=200..450, >150MHz	SOT-23	16ta	-	3a	Sam
9CC	-	BC858C	Si-pnp	GP, 30V, 100mA, 310mW, B=420..800, >150MHz	SOT-23	16ta	-	3a	Sam
9CD	-	STM1818T	Vdet-IC	3.06V±1.5%, +Reset ODO	SOT-23	16vda	VD6	3b	Ste
9CE	-	STM1818S	Vdet-IC	2.88V±1.5%, +Reset ODO	SOT-23	16vda	VD6	3b	Ste
9CF	-	STM1818R	Vdet-IC	2.55V±1.5%, +Reset ODO	SOT-23	16vda	VD6	3b	Ste
9D	-	BZB784-C7V5	Z-diode	Dual, 7.5V±5%, Zzt=6Ω, 350mW	SOT-323	16df	-	3a	Phi
9D	-	BZB984-C7V5	Z-diode	Dual, 7.5V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
9D	-	UN2224	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=2k2/10k	SC-59	16ta	-	3a	Pan
9D	-	UNR2224	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=2k2/10k	SC-59	16ta	-	3a	Pan
9DA	-	BC859A	Si-pnp	GP, 30V, 100mA, 310mW, B=110..220, >150MHz	SOT-23	16ta	-	3a	Sam
9DB	-	BC859B	Si-pnp	GP, 30V, 100mA, 310mW, B=200..450, >150MHz	SOT-23	16ta	-	3a	Sam
9DC	-	BC859C	Si-pnp	GP, 30V, 100mA, 310mW, B=420..800, >150MHz	SOT-23	16ta	-	3a	Sam
9E	-	BZB784-C8V2	Z-diode	Dual, 8.2V±5%, Zzt=6Ω, 350mW	SOT-323	16df	-	3a	Phi
9E	-	BZB984-C8V2	Z-diode	Dual, 8.2V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
9EA	-	BC860A	Si-pnp	GP, 50V, 100mA, 310mW, B=110..220, >150MHz	SOT-23	16ta	-	3a	Sam
9EB	-	BC860B	Si-pnp	GP, 50V, 100mA, 310mW, B=200..450, >150MHz	SOT-23	16ta	-	3a	Sam
9EC	-	BC860C	Si-pnp	GP, 50V, 100mA, 310mW, B=420..800, >150MHz	SOT-23	16ta	-	3a	Sam
9F	-	BZB784-C9V1	Z-diode	Dual, 9.1V±5%, Zzt=6Ω, 350mW	SOT-323	16df	-	3a	Phi
9F	-	BZB984-C9V1	Z-diode	Dual, 9.1V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
9F	-	R3131N19EA	Vdet-IC	1.9V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
9F	-	UNR521W	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 100MHz, R2=100k	SOT-323	16ta	-	3a	Pan
9FA	-	BC807-16	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=100..250	SOT-23	16ta	-	3a	Sam
9FB	-	BC807-25	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=160..400	SOT-23	16ta	-	3a	Sam
9FC	-	BC807-40	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=250..600	SOT-23	16ta	-	3a	Sam
9G	-	BZB784-C10	Z-diode	Dual, 10V±5%, Zzt=8Ω, 350mW	SOT-323	16df	-	3a	Phi
9G	-	BZB984-C10	Z-diode	Dual, 10V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
9G	-	R3131N29EA	Vdet-IC	2.9V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
9GA	-	BC808-16	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=100..250, >100MHz	SOT-23	16ta	-	3a	Sam
9GB	-	BC808-25	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=160..400, >100MHz	SOT-23	16ta	-	3a	Sam
9GC	-	BC808-40	Si-pnp	AF-Drv, 30V, 500mA, 330mW, B=250..630, >100MHz	SOT-23	16ta	-	3a	Sam
9H	-	BZB784-C11	Z-diode	Dual, 11V±5%, Zzt=10Ω, 350mW	SOT-323	16df	-	3a	Phi
9H	-	BZB984-C11	Z-diode	Dual, 11V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
9H	-	R3131N39EA	Vdet-IC	3.9V±1.5%, +Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
9Ht	-	BC850W	Si-npn	GP, 50V, 100mA, 200mW, B=200..800, >100MHz	SOT-323	16ta	-	3a	Phi
9J	-	ADM809JART	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ad
9J	-	BZB784-C12	Z-diode	Dual, 12V±5%, Zzt=10Ω, 350mW	SOT-323	16df	-	3a	Phi
9J	-	BZB984-C12	Z-diode	Dual, 12V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
9K	-	BZB784-C13	Z-diode	Dual, 13V±5%, Zzt=10Ω, 350mW	SOT-323	16df	-	3a	Phi
9K	-	BZB984-C13	Z-diode	Dual, 13V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
9L	-	ADM809LART	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ad
9L	-	BZB784-C15	Z-diode	Dual, 15V±5%, Zzt=10Ω, 350mW	SOT-323	16df	-	3a	Phi
9L	-	BZB984-C15	Z-diode	Dual, 15V±5%, If=200mA, 265mW	SOT-663	18df	-	3a	Phi
9M	-	ADM809MART	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ad
9P	-	BCX70HR	Si-npn	GP, 45V, 200mA, 330mW, B=180..310, >250MHz	SOT-23	16ta	-	3a	Zx
9R	-	ADM809RART	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ad
9R	-	FMMT2369R	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120	SOT-23	16te	-	3a	Zx





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9T	-	ADM809TART	Vdet-IC	3.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ad
9V1	-	CHPZ9V1PT	Z-diode	Dual, 8.6..9.6V, Izt=5mA, Zzt=15Ω, 350mW	SOT-23	16df	-	3a	Chm
9V1	-	PZM9.1NB	Z-diode	9.1V±2.5%, If=250mA, 300mW	SOT-346	16dc	-	3a	Phi
9Z1	-	CZ1W9V1	Z-diode	9.1V±5%, Izt=28mA, 600mW	SOT-23	16dc	-	3a	Cdi
a	-	AX6901AA	Vdet-IC	4.63V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Axl
A	-	MRF947	Si-npn	UHF, 20V, 50mA, 188mW, B>50, 8GHz	SOT-323	16ta	-	3a	Mot
A	-	MRF947T1	Si-npn	VHF/UHF, 20V, 50mA, 188mW, B>50, 8GHz	SOT-323	16ta	-	3a	Mot
A	-	SB01-05CP	Si-diode	SBR, HF, 50V, 100mA, Vf<0.55V(100mA), 4.4pF, 10ns	CP	16dc	-	3a	San
A	-	SB01-05Q	Si-diode	SBR, HF, 50V, 100mA, Vf<0.55V(100mA), 4.4pF, 10ns	MCP	16dc	-	3a	San
A	cr	ELM7522NEB	Vdet-IC	2.2V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
A	cs	ELM7522CEB	Vdet-IC	2.2V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
A0	-	BZX84C43	Z-diode	40..46V, Zzt=150Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
A0	-	HSMS-2800	Si-diode	Schottky, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-23	16dc	-	3a	Agi
A0	-	HSMS-280B	Si-diode	Schottky, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-323	16dc	-	3a	Agi
A0	-	MC2837	Si-diode	Dual, Sw, Hi-sp, 80V, 100mA, Vf<1.2V(100mA), 0.9pF, <4ns	SC-59	16dl	-	3a	Mit
A0	-	RT9161-16CV	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
A0	-	RT9818C-20CU3	Vdet-IC	2.0V±1.5%, -Reset ODO, Td=220ms	SOT-323	16vdc	VD6	3a	Rct
A01	-	SST201	n-FET	AF, LN, 40V, 350mW, Idss=0.2..1mA, Up<1.5V	SOT-23	16fj	-	3a	Cal
A01	-	SST203	n-FET	AF, LN, 40V, 350mW, Idss=4..20mA, Up<10V	SOT-23	16fj	-	3a	Cal
A02	-	SST202	n-FET	AF, LN, 40V, 350mW, Idss=0.9..4.5mA, Up<4V	SOT-23	16fj	-	3a	Cal
A04	-	SST204	n-FET	AF, LN, 25V, 350mW, Idss=0.2..3mA, Up<2V	SOT-23	16fj	-	3a	Cal
A1	-	2SJ243	p-MOSFET	V-MOS, Sw, 30V, ±0.1A, 200mW, 10/130ns, <25Ω(10mA)	SOT-323	16fh	-	3a	Nec
A1	-	BAW56	Si-diode	Dual, Sw, 70V, 200mA, 250mW, Vf<1.25V, 2pF, <6ns	SOT-23	16df	-	3a	All
A1	-	BAW56L	Si-diode	Dual, Sw, 70V, 200mA, 250mW, Vf<1.25V, 2pF, <6ns	SOT-23	16df	-	3a	Ons
A1	-	BAW56PT	Si-diode	Dual, Sw, 85V, 150mA, Vf<1.25V(150mA), 4ns	SOT-23	16df	-	3a	Chm
A1	-	BAW56T	Si-diode	Dual, Sw, 70V, 200mA, 250mW, Vf<1.25V, 2pF, <6ns	SOT-416	16df	-	3a	Ons
A1	-	BAW56TPT	Si-diode	Dual, Sw, 85V, 150mA, Vf<1.25V(150mA), 4ns	SOT-416	16df	-	3a	Chm
A1	-	BAW56W	Si-diode	Dual, Hi-Speed, 70V, 200mA, 200mW, 2pF, 4ns	SOT-323	16df	-	3a	Ons
A1	-	CHP202KPT	Si-diode	Dual, Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	SOT-23	16df	-	3a	Chm
A1	-	CHP222PT	Si-diode	Dual, Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	SOT-416	16df	-	3a	Chm
A1	-	DSE015	Si-diode	Sw, Hi-sp, 75V, 150mA, Vf<1.2V(100mA), 8ns, 12.5MHz	MCP	16eb	-	3a	San
A1	-	MC2831	Si-diode	Sw, Hi-sp, 50V, 100mA, Vf<1.2V(100mA), 2.8pF, <4ns	SC-59	16eb	-	3a	Mit
A1	-	MC2841	Si-diode	Sw, Hi-sp, 50V, 100mA, Vf<1.2V(100mA), 2.8pF, <4ns	SOT-323	16eb	-	3a	Mit
A1	-	RT9161-17CV	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
A1	-	RT9818C-22CU3	Vdet-IC	2.2V±1.5%, -Reset ODO, Td=220ms	SOT-323	16vdc	VD6	3a	Rct
A1	-	Si2301DS	p-MOSFET	V-MOS, LogL, 12V, 2.3A, <0.19Ω	SOT-23	16fh	-	3a	Six
A11	-	AIC1747-11GJ3	LVR-IC	LDO, 1.1V±2%, 300mA	SOT-323	16cg	VR1	3a	Aic
A11	-	MMBD1501A	Si-diode	Sw, 180V, 200mA, Vf<1.5V(300mA), <4pF	SOT-23	16dc	-	3a	Nsc
A11	-	MMBD1701A	Si-diode	Fast, 30V, 150mA, 350mW, Vf<1.1V(50mA), 1ns	SOT-23	16dc	-	3a	Nsc
A11	-	MMBD4148CC	Si-diode	Dual, Sw, Fast, 75V, 200mA, 350mW, <4ns, 4pF	SOT-23	16dg	-	3a	Nsc
A11A	-	ML6101C113M	Vdet-IC	1.1V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A12	-	AIC1747-12GJ3	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-323	16cg	VR1	3a	Aic
A12A	-	ML6101C123M	Vdet-IC	1.2V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A13	-	1SS220	Si-diode	Sw, Fast, 70V, 100mA, <3ns	SOT-23	16dr	-	3a	Nec
A13	-	AIC1747-13GJ3	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-323	16cg	VR1	3a	Aic
A13	-	MMBD1503A	Si-diode	Dual 180V, 200mA, Vf<1.5V(300mA), <4pF	SOT-23	16dl	-	3a	Nsc
A13	-	MMBD1703A	Si-diode	Dual, Fast, 30V, 150mA, 350mW, Vf<1.1V(50mA), 1ns	SOT-23	16dl	-	3a	Nsc
A13	-	MMBD4148SE	Si-diode	Dual, Sw, Fast, 75V, 200mA, 350mW, <4ns, 4pF	SOT-23	16dl	-	3a	Nsc
A13A	-	ML6101C133M	Vdet-IC	1.3V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A14	-	1SS221	Si-diode	Sw, Fast, 100V, 100mA, <3ns	SOT-23	16dr	-	3a	Nec
A14	-	MMBD1504A	Si-diode	Dual, Sw, 180V, 200mA, Vf<1.5V(300mA), <4pF	SOT-23	16dg	-	3a	Nsc
A14	-	MMBD1704A	Si-diode	Dual, Fast, 30V, 150mA, 350mW, Vf<1.1V(50mA), 1ns	SOT-23	16dg	-	3a	Nsc
A14A	-	ML6101C143M	Vdet-IC	1.4V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A15	-	1SS222	Si-diode	Sw, Fast, 70V, 100mA, <3ns	SOT-23	16ak	-	3b	Nec
A15	-	AIC1747-15GJ3	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-323	16cg	VR1	3a	Aic
A15	-	MMBD1505A	Si-diode	Dual, Sw, 180V, 200mA, Vf<1.5V(300mA), <4pF	SOT-23	16df	-	3a	Nsc
A15	-	MMBD1705	Si-diode	Dual, Fast, 30V, 150mA, 350mW, Vf<1.1V(50mA), 0.7ns	SOT-23	16df	-	3a	Nsc
A15	-	XC31PNS0015AM	LVR-IC	Temperature Sensitive, -T°factor, 1.5V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A15	-	XC31PPS0015AM	LVR-IC	Temperature Sensitive, +T°factor, 1.5V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A15A	-	ML6101C153M	Vdet-IC	1.5V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A16	-	1SS223	Si-diode	Sw, Fast, 100V, 100mA, <3ns	SOT-23	16ak	-	3b	Nec
A16	-	XC31PNS0016AM	LVR-IC	Temperature Sensitive, -T°factor, 1.6V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A16	-	XC31PPS0016AM	LVR-IC	Temperature Sensitive, +T°factor, 1.6V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A16	-	ZC934ATA	C-diode	VHF-Tuning, 12V, 47/57.7pF(2.5V), Q>80	SOT-23	16dc	-	3a	Zx
A16A	-	ML6101C163M	Vdet-IC	1.6V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A17	-	2SK436-17	n-FET	RF-AM, LN, 15V, 20mA, 150mW, Idss=1.2..2.1mA	SOT-23	16fa	-	3a	San
A17	-	XC31PNS0017AM	LVR-IC	Temperature Sensitive, -T°factor, 1.7V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A17	-	XC31PPS0017AM	LVR-IC	Temperature Sensitive, +T°factor, 1.7V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A17	-	ZC933ATA	C-diode	VHF-Tuning, 12V, 20.25/24.75pF, Q>150	SOT-23	16dc	-	3a	Zx
A17A	-	ML6101C173M	Vdet-IC	1.7V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A18	-	2SK436-18	n-FET	RF-AM, LN, 15V, 20mA, 150mW, Idss=1.7..3mA	SOT-23	16fa	-	3a	San
A18	-	AIC1747-18GJ3	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-323	16cg	VR1	3a	Aic
A18	-	XC31PNS0018AM	LVR-IC	Temperature Sensitive, -T°factor, 1.8V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A18	-	XC31PPS0018AM	LVR-IC	Temperature Sensitive, +T°factor, 1.8V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A18A	-	ML6101C183M	Vdet-IC	1.8V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A19	-	2SK436-19	n-FET	RF-AM, LN, 15V, 20mA, 150mW, Idss=2.5..4.2mA	SOT-23	16fa	-	3a	San
A19	-	XC31PNS0019AM	LVR-IC	Temperature Sensitive, -T°factor, 1.9V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A19	-	XC31PPS0019AM	LVR-IC	Temperature Sensitive, +T°factor, 1.9V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A19A	-	ML6101C193M	Vdet-IC	1.9V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A1E	-	LN2351P1512M	DC-DC-IC	PFM step-up, 1.5V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A1F	-	iDS930115A30	LVR-IC	LDO, 1.5V±2.0%, 400mA	SOT-23	16cg	VR1	3b	Ids
A1F	-	LN2351P1612M	DC-DC-IC	PFM step-up, 1.6V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A1H	-	iDS930118A30	LVR-IC	LDO, 1.8V±2.0%, 400mA	SOT-23	16cg	VR1	3b	Ids
A1H	-	LN2351P1712M	DC-DC-IC	PFM step-up, 1.7V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A1K	-	iDS930130A30	LVR-IC	LDO, 3.0V±2.0%, 400mA	SOT-23	16cg	VR1	3b	Ids
A1K	-	LN2351P1812M	DC-DC-IC	PFM step-up, 1.8V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A1L	-	iDS930125A30	LVR-IC	LDO, 2.5V±2.0%, 400mA	SOT-23	16cg	VR1	3b	Ids
A1L	-	LN2351P1912M	DC-DC-IC	PFM step-up, 1.9V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A1M	-	LN2351P2012M	DC-DC-IC	PFM st-up, 2.0V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A1N	-	LN2351P2112M	DC-DC-IC	PFM st-up, 2.1V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A1O	-	iDS930128A30	LVR-IC	LDO, 2.8V±2.0%, 400mA	SOT-23	16cg	VR1	3b	Ids
A1p	-	BAW56	Si-diode	Dual, Sw, 70V, 200mA, 250mW, Vf<1.25V, 2pF, <6ns	SOT-23	16df	-	3a	PhH
A1P	-	LN2351P2212M	DC-DC-IC	PFM st-up, 2.2V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A1R	-	LN2351P2312M	DC-DC-IC	PFM st-up, 2.3V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A1s	-	BAW56	Si-diode	Dual, Sw, 70V, 200mA, 250mW, Vf<1.25V, 2pF, <6ns	SOT-23	16df	-	3a	Sie
A1s	-	BAW56W	Si-diode	Dual, Hi-Speed, 75V, 150mA, 200mW, 2pF, 4ns	SOT-323	16df	-	3a	Sie
A1S	-	iDS930127A30	LVR-IC	LDO, 2.7V±2.0%, 400mA	SOT-23	16cg	VR1	3b	Ids
A1S	-	LN2351P2412M	DC-DC-IC	PFM st-up, 2.4V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A1t	-	BAW56	Si-diode	Dual, Sw, 70V, 200mA, 250mW, Vf<1.25V, 2pF, <6ns	SOT-23	16df	-	3a	PhM
A1T	-	iDS930133A30	LVR-IC	LDO, 3.3V±2.0%, 400mA	SOT-23	16cg	VR1	3b	Ids
A1T	-	LN2351P2512M	DC-DC-IC	PFM st-up, 2.5V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A1U	-	iDS9301285A30	LVR-IC	LDO, 2.85V±2.0%, 400mA	SOT-23	16cg	VR1	3b	Ids
A1U	-	LN2351P2612M	DC-DC-IC	PFM st-up, 2.6V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A1V	-	iDS930131A30	LVR-IC	LDO, 3.1V±2.0%, 400mA	SOT-23	16cg	VR1	3b	Ids
A1V	-	LN2351P2712M	DC-DC-IC	PFM st-up, 2.7V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A1W	-	BAW56	Si-diode	Dual, Sw, 70V, 200mA, 250mW, Vf<1.25V, 2pF, <6ns	SOT-23	16df	-	3a	PhC
A1X	-	iDS930132A30	LVR-IC	LDO, 3.2V±2.0%, 400mA	SOT-23	16cg	VR1	3b	Ids
A1X	-	LN2351P2812M	DC-DC-IC	PFM st-up, 2.8V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A1Y	-	iDS930135A30	LVR-IC	LDO, 3.5V±2.0%, 400mA	SOT-23	16cg	VR1	3b	Ids
A1Y	-	LN2351P2912M	DC-DC-IC	PFM st-up, 2.9V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A1Z	-	LN2351P3012M	DC-DC-IC	PFM st-up, 3.0V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2	-	BAS16T	Si-diode	Sw, Fast, 75V, 155mA, 170mW, <6ns	SOT-523	16dc	-	3a	Di
A2	-	BAS16W	Si-diode	Sw, Fast, 75V, 300mA, Vf<1.25V(150mA), 4ns, 2pF	SOT-323	16dc	-	3a	Di
A2	-	BAS21PT	Si-diode	Sw, 250V, 250mA, Vf<1.25V(200mA), 50ns	SOT-23	16dc	-	3a	Chm
A2	-	BAT18	PIN-diode	Sw, 35V, 100mA, Vf<1.2V, Cd<1pF	SOT-23	16dc	-	3a	Phi
A2	-	DSB015	Si-diode	Sw, Hi-sp, 75V, 150mA, Vf<1.2V(100mA), 5ns, 20MHz	CP	16dc	-	3a	San
A2	-	DSH015	Si-diode	Sw, Hi-sp, 75V, 150mA, Vf<1.2V(100mA), 5ns, 20MHz	MCP	16dc	-	3a	San
A2	-	FMMD2B36	C-diode	Dual, 75V, 100mA, Cd<4pF, <6ns	SOT-23	16df	-	3a	Zx
A2	-	HSMS-2802	Si-diode	Dual, Schottky, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-23	16dl	-	3a	Agi
A2	-	HSMS-280C	Si-diode	Dual, Schottky, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-323	16dl	-	3a	Agi
A2	-	KV1520	C-diode	Dual, AM-Tunung, 20V, 50mA, 100mW, 143/35pF(6.5..1V)	SOT-23	16dg	-	3a	Tok
A2	-	MC2833	Si-diode	Sw, Hi-sp, 50V, 100mA, Vf<1.2V(100mA), 2.8pF, <4ns	SC-59	16ak	-	3a	Mit
A2	-	MC2843	Si-diode	Sw, Hi-sp, 50V, 100mA, Vf<1.2V(100mA), 2.8pF, <4ns	SOT-323	16ak	-	3a	Mit
A2	-	MMBD4148	Si-diode	Sw, Fast, 75V, 200mA, 350mW, <4ns, 4pF	SOT-23	16dc	-	3g	Pjt
A2	-	MMBD4148W	Si-diode	Sw, Fast, 75V, 300mA, Vf<1.25V(150mA), <4ns, 2pF	SOT-323	16dc	-	3a	Di
A2	-	R3113D121A	Vdet-IC	1.2V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
A2	-	RT9161-18CV	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
A2	-	Si2302DS	n-MOSFET	V-MOS, LogL, 20V, ±2.8A, <155mΩ	SOT-23	16fh	-	3a	Six
A2	-	TMPD2836	Si-diode	GP, Dual, 75V, 500mA, Vf<1V(10mA), Cd<4pF, <6ns	SOT-23	16df	-	3a	All
A2	cb	MIC803-40D2VC3	Vdet-IC	4.0V±2.5%, -Reset ODO, 20ms	SC-70	16vdc	VD7	3a	Mcr
A2	cb	MIC803-40D2VM3	Vdet-IC	4.0V±2.5%, -Reset ODO, 20ms	SOT-23	16vdc	VD7	3a	Mcr
A2-	-	RT9161-18PV	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
A2-	-	RT9818C-29PU3	Vdet-IC	2.9V±1.5%, -Reset ODO, Td=220ms	SOT-323	16vdc	VD6	3a	Rct
A20	-	2SK1066-20	n-FET	GP, 15V, 20mA, 100mW, Idss=3.5..6mA, Up<1.5V	MCP	16fa	-	3a	San
A20	-	2SK436-20	n-FET	RF-AM, LN, 15V, 20mA, 150mW, Idss=3.5..6mA	SOT-23	16fa	-	3a	San
A20	-	AIC1747-20GJ3	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-323	16cg	VR1	3a	Aic
A20	-	LN2351P3112M	DC-DC-IC	PFM st-up, 3.1V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A20	-	XC31PNS0020AM	LVR-IC	Temperature Sensitive, -T°factor, 2V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A20	-	XC31PPS0020AM	LVR-IC	Temperature Sensitive, +T°factor, 2V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A20A	-	ML6101C202M	Vdet-IC	2.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A21	-	2SK1066-21	n-FET	GP, 15V, 20mA, 100mW, Idss=5..8.5mA, Up<1.5V	MCP	16fa	-	3a	San
A21	-	2SK436-21	n-FET	RF-AM, LN, 15V, 20mA, 150mW, Idss=5..8.5mA	SOT-23	16fa	-	3a	San
A21	-	GS809C21EUA	Vdet-IC	2.1V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
A21	-	LN2351P3212M	DC-DC-IC	PFM st-up, 3.2V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A21	-	XC31PNS0021AM	LVR-IC	Temperature Sensitive, -T°factor, 2.1V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A21	-	XC31PPS0021AM	LVR-IC	Temperature Sensitive, +T°factor, 2.1V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A21A	-	ML6101C212M	Vdet-IC	2.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A22	-	2SK1066-22	n-FET	GP, 15V, 20mA, 100mW, Idss=7.3..12mA, Up<1.5V	MCP	16fa	-	3a	San
A22	-	2SK436-22	n-FET	RF-AM, LN, 15V, 20mA, 150mW, Idss=7.3..12mA	SOT-23	16fa	-	3a	San
A22	-	LN2351P3312M	DC-DC-IC	PFM st-up, 3.3V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A22	-	XC31PNS0022AM	LVR-IC	Temperature Sensitive, -T°factor, 2.2V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A22	-	XC31PPS0022AM	LVR-IC	Temperature Sensitive, +T°factor, 2.2V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A22A	-	ML6101C222M	Vdet-IC	2.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A23	-	LN2351P3412M	DC-DC-IC	PFM st-up, 3.4V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A23	-	XC31PNS0023AM	LVR-IC	Temperature Sensitive, -T°factor, 2.3V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A23	-	XC31PPS0023AM	LVR-IC	Temperature Sensitive, +T°factor, 2.3V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A23A	-	ML6101C232M	Vdet-IC	2.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A24	-	GS809C24EUA	Vdet-IC	2.4V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
A24	-	LN2351P3512M	DC-DC-IC	PFM st-up, 3.5V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A24	-	XC31PNS0024AM	LVR-IC	Temperature Sensitive, -T°factor, 2.4V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A24	-	XC31PPS0024AM	LVR-IC	Temperature Sensitive, +T°factor, 2.4V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A24A	-	ML6101C242M	Vdet-IC	2.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A25	-	AIC1747-25GJ3	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-323	16cg	VR1	3a	Aic
A25	-	LN2351P3612M	DC-DC-IC	PFM st-up, 3.6V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A25	-	XC31PNS0025AM	LVR-IC	Temperature Sensitive, -T°factor, 2.5V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A25	-	XC31PPS0025AM	LVR-IC	Temperature Sensitive, +T°factor, 2.5V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A25A	-	ML6101C252M	Vdet-IC	2.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A26	-	GS809CREUA	Vdet-IC	2.63V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
A26	-	KTF810T-2.63	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Icm
A26	-	LN2351P3712M	DC-DC-IC	PFM st-up, 3.7V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A26	-	XC31PNS0026AM	LVR-IC	Temperature Sensitive, -T°factor, 2.6V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A26	-	XC31PPS0026AM	LVR-IC	Temperature Sensitive, +T°factor, 2.6V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A26A	-	ML6101C262M	Vdet-IC	2.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A27	-	AIC1747-27GJ3	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-323	16cg	VR1	3a	Aic
A27	-	GS809C27SEUA	Vdet-IC	2.7V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
A27	-	LN2351P3812M	DC-DC-IC	PFM st-up, 3.8V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A27	-	XC31PNS0027AM	LVR-IC	Temperature Sensitive, -T°factor, 2.7V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A27	-	XC31PPS0027AM	LVR-IC	Temperature Sensitive, +T°factor, 2.7V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A27A	-	ML6101C272M	Vdet-IC	2.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A28	-	LN2351P3912M	DC-DC-IC	PFM st-up, 3.9V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A28	-	XC31PNS0028AM	LVR-IC	Temperature Sensitive, -T°factor, 2.8V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A28	-	XC31PPS0028AM	LVR-IC	Temperature Sensitive, +T°factor, 2.8V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A28A	-	ML6101C282M	Vdet-IC	2.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A29	-	GS809CSEUA	Vdet-IC	2.93V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
A29	-	KTF810T-2.93	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Icm
A29	-	LN2351P4012M	DC-DC-IC	PFM st-up, 4.0V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A29	-	XC31PNS0029AM	LVR-IC	Temperature Sensitive, -T°factor, 2.9V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A29	-	XC31PPS0029AM	LVR-IC	Temperature Sensitive, +T°factor, 2.9V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A29A	-	ML6101C292M	Vdet-IC	2.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A2A	-	LN2351P4112M	DC-DC-IC	PFM st-up, 4.1V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2B	-	LN2351P4212M	DC-DC-IC	PFM st-up, 4.2V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2C	-	LN2351P4312M	DC-DC-IC	PFM st-up, 4.3V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2D	-	LN2351P4412M	DC-DC-IC	PFM st-up, 4.4V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2E	-	LN2351P4512M	DC-DC-IC	PFM st-up, 4.5V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2F	-	LN2351P4612M	DC-DC-IC	PFM st-up, 4.6V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2H	-	LN2351P4712M	DC-DC-IC	PFM st-up, 4.7V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2J	-	AIC1747-285GJ3	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-323	16cg	VR1	3a	Aic
A2K	-	LN2351P4812M	DC-DC-IC	PFM st-up, 4.8V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2L	-	LN2351P4912M	DC-DC-IC	PFM st-up, 4.9V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2M	-	LN2351P5012M	DC-DC-IC	PFM st-up, 5.0V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2N	-	LN2351P5112M	DC-DC-IC	PFM st-up, 5.1V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2P	-	LN2351P5212M	DC-DC-IC	PFM st-up, 5.2V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2R	-	LN2351P5312M	DC-DC-IC	PFM st-up, 5.3V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2S	-	LN2351P5412M	DC-DC-IC	PFM st-up, 5.4V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2T	-	LN2351P5512M	DC-DC-IC	PFM st-up, 5.5V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2U	-	LN2351P5612M	DC-DC-IC	PFM st-up, 5.6V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2V	-	LN2351P5712M	DC-DC-IC	PFM st-up, 5.7V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2X	-	LN2351P5812M	DC-DC-IC	PFM st-up, 5.8V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A2X	-	MMBD2836	Si-diode	Dual, Sw, 75V, 100mA, 225mW, Vf>1.2V(100mA), <15ns	SOT-23	16df	-	3a	Ons
A2Y	-	LN2351P5912M	DC-DC-IC	PFM st-up, 5.9V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A2Z	-	LN2351P6012M	DC-DC-IC	PFM st-up, 6.0V±2%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Nln
A3	-	1PS300	Si-diode	Dual, Sw, Fast, 85V, 85mA, <4ns	SOT-323	16df	-	3a	Phi
A3	-	1S2835	Si-diode	Dual, Sw, Fast, 35V, 150mA, <4ms	SOT-23	16df	-	3a	Nec
A3	-	1SS181	Si-diode	Dual, Sw, U-Fst, 85V, 100mA, 150mW, Vf<1.2V(100mA), <4ns	SC-59	16df	-	3a	Tos
A3	-	1SS300	Si-diode	Dual, 80V, 100mA, VF<1.2V(100mA), <4ns	SOT-323	16df	-	3a	Tos
A3	-	1SS360	Si-diode	Dual, Sw, U-Fast, 85V, 100mA, 150mW, Vf<1.2V(0.1A), <4ns	SOT-23	16df	-	3a	Tos
A3	-	1SS360F	Si-diode	Dual, Sw, U-Fast, 85V, 100mA, 150mW, Vf<1.2V(0.1A), <4ns	SOT-23F	18df	-	3a	Tos
A3	-	HSMS-2803	Si-diode	Dual, Schottky, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-23	16df	-	3a	Agi
A3	-	HSMS-280E	Si-diode	Dual, Schottky, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-323	16df	-	3a	Agi
A3	-	MC2832	Si-diode	Sw, Hi-sp, 50V, 100mA, Vf<1.2V(100mA), 1.3pF, <4ns	SC-59	16dc	-	3a	Mit
A3	-	MC2842	Si-diode	Sw, Hi-sp, 50V, 100mA, Vf<1.2V(100mA), 1.3pF, <4ns	SOT-323	16dc	-	3a	Mit
A3	-	MC2852	Si-diode	Sw, Hi-sp, 50V, 100mA, Vf<1.2V(100mA), 1.3pF, <4ns	SC-90	16dc	-	3a	Mit
A3	-	MMBD1005	Si-diode	Dual, Sw, 30V, 200mA, 225mW, Vf<0.95V(10mA), <2pF	SOT-23	16df	-	3a	Mot
A3	-	MMBD4448	Si-diode	Sw, Fast, 80V, 500mA, Vf<1V(100mA), <4ns	SOT-23	16dc	-	3g	Pjt
A3	-	MMBD4448HT	Si-diode	Sw, Fast, 75V, 500mA, Vf<1.25V(150mA), <4ns	SOT-523	16dc	-	3a	Di
A3	-	R3113D131A	Vdet-IC	1.3V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
A3	-	RT9161-19CV	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
A3	-	Si2303DS	p-MOSFET	V-MOS, LogL, 30V, 1.7A, <0.48Ω	SOT-23	16fh	-	3a	Six
A3	-	TMPD2835	Si-diode	GP, Dual, 35V, 500mA, Vf<1V(10mA), Cd<4pF, <6ns	SOT-23	16df	-	3a	All
A3	-	TWT4148A-120F5	Si-diode	Dual, Sw, 85V, 100mA, Vf<1.2V(100mA), 4pF	F5T	18df	-	3a	Ttr
A3	-	TWT4148A-120WT	Si-diode	Dual, Sw, 85V, 100mA, Vf<1.2V(100mA), 4pF	SOT-523	18df	-	3a	Ttr
A3	cb	MIC803-29D4VC3	Vdet-IC	2.93V±2.5%, -Reset ODO, 1120ms	SC-70	16vdc	VD7	3a	Mcr
A3	cb	MIC803-29D4VM3	Vdet-IC	2.93V±2.5%, -Reset ODO, 1120ms	SOT-23	16vdc	VD7	3a	Mcr
A3-	-	RT9818B-25PU3	Vdet-IC	2.5V±1.5%, -Reset ODO, Td=55ms	SOT-323	16vdc	VD6	3a	Rct
A30	-	AIC1747-30GJ3	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-323	16cg	VR1	3a	Aic
A30	-	GS809CTEUA	Vdet-IC	3.08V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
A30	-	KTF810T-3.08	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Icm
A30	-	XC31PNS0030AM	LVR-IC	Temperature Sensitive, -T°factor, 3V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A30	-	XC31PPS0030AM	LVR-IC	Temperature Sensitive, +T°factor, 3V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A30A	-	ML6101C302M	Vdet-IC	3.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A31	-	XC31PNS0031AM	LVR-IC	Temperature Sensitive, -T°factor, 3.1V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A31	-	XC31PPS0031AM	LVR-IC	Temperature Sensitive, +T°factor, 3.1V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A31A	-	ML6101C312M	Vdet-IC	3.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A32	-	XC31PNS0032AM	LVR-IC	Temperature Sensitive, -T°factor, 3.2V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A32	-	XC31PPS0032AM	LVR-IC	Temperature Sensitive, +T°factor, 3.2V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A32A	-	ML6101C322M	Vdet-IC	3.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A33	-	AIC1747-33GJ3	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-323	16cg	VR1	3a	Aic
A33	-	XC31PNS0033AM	LVR-IC	Temperature Sensitive, -T°factor, 3.3V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A33	-	XC31PPS0033AM	LVR-IC	Temperature Sensitive, +T°factor, 3.3V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A33A	-	ML6101C332M	Vdet-IC	3.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A34	-	XC31PNS0034AM	LVR-IC	Temperature Sensitive, -T°factor, 3.4V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A34	-	XC31PPS0034AM	LVR-IC	Temperature Sensitive, +T°factor, 3.4V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A34A	-	ML6101C342M	Vdet-IC	3.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A35	-	AIC1747-35GJ3	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-323	16cg	VR1	3a	Aic
A35	-	XC31PNS0035AM	LVR-IC	Temperature Sensitive, -T°factor, 3.5V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A35	-	XC31PPS0035AM	LVR-IC	Temperature Sensitive, +T°factor, 3.5V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A35A	-	ML6101C352M	Vdet-IC	3.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A36	-	XC31PNS0036AM	LVR-IC	Temperature Sensitive, -T°factor, 3.6V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A36	-	XC31PPS0036AM	LVR-IC	Temperature Sensitive, +T°factor, 3.6V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A36A	-	ML6101C362M	Vdet-IC	3.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A37	-	AIC1747-37GJ3	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-323	16cg	VR1	3a	Aic
A37	-	XC31PNS0037AM	LVR-IC	Temperature Sensitive, -T°factor, 3.7V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A37	-	XC31PPS0037AM	LVR-IC	Temperature Sensitive, +T°factor, 3.7V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A37A	-	ML6101C372M	Vdet-IC	3.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A38	-	AIC1747-38GJ3	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-323	16cg	VR1	3a	Aic
A38	-	XC31PNS0038AM	LVR-IC	Temperature Sensitive, -T°factor, 3.8V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A38	-	XC31PPS0038AM	LVR-IC	Temperature Sensitive, +T°factor, 3.8V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A38A	-	ML6101C382M	Vdet-IC	3.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A39	-	XC31PNS0039AM	LVR-IC	Temperature Sensitive, -T°factor, 3.9V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A39	-	XC31PPS0039AM	LVR-IC	Temperature Sensitive, +T°factor, 3.9V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A39A	-	ML6101C392M	Vdet-IC	3.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A3E	-	LN2351P1532M	DC-DC-IC	PFM step-up, 1.5V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A3F	-	LN2351P1632M	DC-DC-IC	PFM step-up, 1.6V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A3H	-	LN2351P1732M	DC-DC-IC	PFM step-up, 1.7V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A3K	-	LN2351P1832M	DC-DC-IC	PFM step-up, 1.8V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A3L	-	LN2351P1932M	DC-DC-IC	PFM step-up, 1.9V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A3M	-	LN2351P2032M	DC-DC-IC	PFM st-up, 2.0V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A3N	-	LN2351P2132M	DC-DC-IC	PFM st-up, 2.1V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A3p	-	BAT17	Si-diode	Schottky, UHF-Mix, 4V, 130mA, Vf<0.6V(10mA), Cd<0.75pF	SOT-23	16dc	-	3a	PhH
A3P	-	LN2351P2232M	DC-DC-IC	PFM st-up, 2.2V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A3R	-	LN2351P2332M	DC-DC-IC	PFM st-up, 2.3V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A3S	-	LN2351P2432M	DC-DC-IC	PFM st-up, 2.4V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A3t	-	BAT17	Si-diode	Schottky, UHF-Mix, 4V, 130mA, Vf<0.6V(10mA), Cd<0.75pF	SOT-23	16dc	-	3a	PhM
A3T	-	1PS181	Si-diode	Dual, Hi-Speed, 85V, 215mA, 250mW, <2pF, <4ns	SC-59	16df	-	3a	Phi
A3T	-	LN2351P2532M	DC-DC-IC	PFM st-up, 2.5V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A3U	-	LN2351P2632M	DC-DC-IC	PFM st-up, 2.6V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A3V	-	LN2351P2732M	DC-DC-IC	PFM st-up, 2.7V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A3W	-	BAT17	Si-diode	Schottky, UHF-Mix, 4V, 130mA, Vf<0.6V(10mA), Cd<0.75pF	SOT-23	16dc	-	3a	PhC
A3X	-	LN2351P2832M	DC-DC-IC	PFM st-up, 2.8V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A3X	-	MMBD2835	Si-diode	Dual, Sw, 35V, 100mA, 225mW, Vf>1.2V(100mA), <15ns	SOT-23	16df	-	3a	Ons
A3Y	-	LN2351P2932M	DC-DC-IC	PFM st-up, 2.9V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A3Z	-	LN2351P3032M	DC-DC-IC	PFM st-up, 3.0V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4	-	1S2836	Si-diode	Dual, Sw, Fast, 75V, 150mA, <4ms	SOT-23	16df	-	3a	Nec
A4	-	BAV70	Si-diode	Dual, Sw, 75V, 215mA, Vf<1.25V, <4ns	SOT-23	16dg	-	3a	Nsc
A4	-	BAV70PT	Si-diode	Dual, Sw, 75V, 250mA, Vf<1.25V(150mA), 4ns	SOT-23	16dg	-	3a	Chm
A4	-	BAV70T	Si-diode	Dual, Sw, 70V, 200mA, 225mW, Vf<1.25V, <4ns	SOT-416	16dg	-	3a	Ons
A4	-	BAV70TPT	Si-diode	Dual, Sw, 75V, 150mA, Vf<1.25V(150mA), 4ns	SOT-416	16dg	-	3a	Chm
A4	-	BAV70W	Si-diode	Dual, Sw, 75V, 215mA, 225mW, Vf<1.25V, <4ns	SOT-323	16dg	-	3a	Ons
A4	-	BB404A	C-diode	Dual, 10V, 43.5..27.5pF(2..8V), 100MHz	SOT-23	16dg	-	3a	Itt
A4	-	CHN202KPT	Si-diode	Dual, Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	SOT-23	16dg	-	3a	Chm
A4	-	CHN222PT	Si-diode	Dual, Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	SOT-416	16dg	-	3a	Chm
A4	-	HSMS-2804	Si-diode	Dual, Schottky, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-23	16dg	-	3a	Agi
A4	-	HSMS-280F	Si-diode	Dual, Schottky, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-323	16dg	-	3a	Agi
A4	-	KA4A4M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/10k	SOT-416	16ta	-	3a	Nec
A4	-	MC2836	Si-diode	Dual, Sw, Hi-sp, 50V, 100mA, Vf<1.2V(100mA), 2.8pF, <4ns	SC-59	16df	-	3a	Mit
A4	-	MC2846	Si-diode	Dual, Sw, Hi-sp, 50V, 100mA, Vf<1.2V(100mA), 2.8pF, <4ns	SOT-323	16df	-	3a	Mit
A4	-	MC2856	Si-diode	Dual, Sw, Hi-sp, 50V, 100mA, Vf<1.2V(100mA), 2.8pF, <4ns	SC-90	16df	-	3a	Mit
A4	-	R3113D141A	Vdet-IC	1.4V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
A4	-	RT9161-20CV	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
A4	-	Si2304DS	n-MOSFET	V-MOS, 30V, ±2.5A, <190mΩ(5A)	SOT-23	16fh	-	3a	Six
A4	cb	MIC803-31D3VC3	Vdet-IC	3.08V±2.5%, -Reset ODO, 140ms	SC-70	16vdc	VD7	3a	Mcr
A4	cb	MIC803-31D3VM3	Vdet-IC	3.08V±2.5%, -Reset ODO, 140ms	SOT-23	16vdc	VD7	3a	Mcr
A4-	-	RT9161-20PV	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
A4-	-	RT9818A-38PU3	Vdet-IC	3.8V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Rct
A40	-	GS809CJEUA	Vdet-IC	4.0V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
A40	-	KTF810T-4.00	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Icm
A40	-	LN2351P3132M	DC-DC-IC	PFM st-up, 3.1V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A40	-	XC31PNS0040AM	LVR-IC	Temperature Sensitive, -T°factor, 4V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A40	-	XC31PPS0040AM	LVR-IC	Temperature Sensitive, +T°factor, 4V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A40A	-	ML6101C402M	Vdet-IC	4.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A41	-	LN2351P3232M	DC-DC-IC	PFM st-up, 3.2V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A41	-	XC31PNS0041AM	LVR-IC	Temperature Sensitive, -T°factor, 4.1V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A41	-	XC31PPS0041AM	LVR-IC	Temperature Sensitive, +T°factor, 4.1V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A41A	-	ML6101C412M	Vdet-IC	4.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A42	-	LN2351P3332M	DC-DC-IC	PFM st-up, 3.3V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A42	-	XC31PNS0042AM	LVR-IC	Temperature Sensitive, -T°factor, 4.2V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A42	-	XC31PPS0042AM	LVR-IC	Temperature Sensitive, +T°factor, 4.2V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A42A	-	ML6101C422M	Vdet-IC	4.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A43	-	GS809CMEUA	Vdet-IC	4.38V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
A43	-	KTF810T-4.38	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Icm
A43	-	LN2351P3432M	DC-DC-IC	PFM st-up, 3.4V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A43	-	XC31PNS0043AM	LVR-IC	Temperature Sensitive, -T°factor, 4.3V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A43	-	XC31PPS0043AM	LVR-IC	Temperature Sensitive, +T°factor, 4.3V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A43A	-	ML6101C432M	Vdet-IC	4.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A44	-	LN2351P3532M	DC-DC-IC	PFM st-up, 3.5V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A44	-	XC31PNS0044AM	LVR-IC	Temperature Sensitive, -T°factor, 4.4V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A44	-	XC31PPS0044AM	LVR-IC	Temperature Sensitive, +T°factor, 4.4V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A44A	-	ML6101C442M	Vdet-IC	4.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A45	-	LN2351P3632M	DC-DC-IC	PFM st-up, 3.6V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A45	-	XC31PNS0045AM	LVR-IC	Temperature Sensitive, -T°factor, 4.5V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A45	-	XC31PPS0045AM	LVR-IC	Temperature Sensitive, +T°factor, 4.5V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A45A	-	ML6101C452M	Vdet-IC	4.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A46	-	BAR46A	Si-diode	Dual, Schottky, 100V, 150mA, 230mW, Vf<1V(250mA), 10pF	SOT-23	16df	-	3a	Ste
A46	-	BAT46A	Si-diode	Dual, SBD, 100V, 150mA, Vf<1V(250mA), 6pF	SOT-23	16df	-	3b	Ste
A46	-	GS809CLEUA	Vdet-IC	4.63V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
A46	-	KTF810T-4.63	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Icm
A46	-	LN2351P3732M	DC-DC-IC	PFM st-up, 3.7V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A46	-	XC31PNS0046AM	LVR-IC	Temperature Sensitive, -T°factor, 4.6V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A46	-	XC31PPS0046AM	LVR-IC	Temperature Sensitive, +T°factor, 4.6V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A46A	-	ML6101C462M	Vdet-IC	4.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A47	-	LN2351P3832M	DC-DC-IC	PFM st-up, 3.8V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A47	-	XC31PNS0047AM	LVR-IC	Temperature Sensitive, -T°factor, 4.7V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A47	-	XC31PPS0047AM	LVR-IC	Temperature Sensitive, +T°factor, 4.7V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A47A	-	ML6101C472M	Vdet-IC	4.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A48	-	LN2351P3932M	DC-DC-IC	PFM st-up, 3.9V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A48	-	XC31PNS0048AM	LVR-IC	Temperature Sensitive, -T°factor, 4.8V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A48	-	XC31PPS0048AM	LVR-IC	Temperature Sensitive, +T°factor, 4.8V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A48A	-	ML6101C482M	Vdet-IC	4.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A49	-	LN2351P4032M	DC-DC-IC	PFM st-up, 4.0V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A49	-	XC31PNS0049AM	LVR-IC	Temperature Sensitive, -T°factor, 4.9V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A49	-	XC31PPS0049AM	LVR-IC	Temperature Sensitive, +T°factor, 4.9V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A49A	-	ML6101C492M	Vdet-IC	4.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A4A	-	LN2351P4132M	DC-DC-IC	PFM st-up, 4.1V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4B	-	LN2351P4232M	DC-DC-IC	PFM st-up, 4.2V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4C	-	LN2351P4332M	DC-DC-IC	PFM st-up, 4.3V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4D	-	LN2351P4432M	DC-DC-IC	PFM st-up, 4.4V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4E	-	LN2351P4532M	DC-DC-IC	PFM st-up, 4.5V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4F	-	LN2351P4632M	DC-DC-IC	PFM st-up, 4.6V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4H	-	LN2351P4732M	DC-DC-IC	PFM st-up, 4.7V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4K	-	LN2351P4832M	DC-DC-IC	PFM st-up, 4.8V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4L	-	LN2351P4932M	DC-DC-IC	PFM st-up, 4.9V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4M	-	LN2351P5032M	DC-DC-IC	PFM st-up, 5.0V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4N	-	LN2351P5132M	DC-DC-IC	PFM st-up, 5.1V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4p	-	BAV70	Si-diode	Dual, Sw, 75V, 215mA, Vf<1.25V, <4ns	SOT-23	16dg	-	3a	PhH
A4P	-	LN2351P5232M	DC-DC-IC	PFM st-up, 5.2V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4R	-	LN2351P5332M	DC-DC-IC	PFM st-up, 5.3V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4s	-	BAV70T	Si-diode	Dual, Sw, 75V, 150mA, 200mW, Vf<1.25V, <4ns	SOT-416	16dg	-	3a	Sie
A4s	-	BAV70W	Si-diode	Dual, Sw, 75V, 215mA, 225mW, Vf<1.25V, <4ns	SOT-323	16dg	-	3a	Sie
A4S	-	LN2351P5432M	DC-DC-IC	PFM st-up, 5.4V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4t	-	BAV70	Si-diode	Dual, Sw, 75V, 215mA, Vf<1.25V, <4ns	SOT-23	16dg	-	3a	PhM
A4T	-	LN2351P5532M	DC-DC-IC	PFM st-up, 5.5V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4U	-	LN2351P5632M	DC-DC-IC	PFM st-up, 5.6V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4V	-	LN2351P5732M	DC-DC-IC	PFM st-up, 5.7V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4W	-	BAV70	Si-diode	Dual, Sw, 75V, 215mA, Vf<1.25V, <4ns	SOT-23	16dg	-	3a	PhC
A4X	-	LN2351P5832M	DC-DC-IC	PFM st-up, 5.8V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4Y	-	LN2351P5932M	DC-DC-IC	PFM st-up, 5.9V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A4Z	-	LN2351P6032M	DC-DC-IC	PFM st-up, 6.0V±2%, 400mA, 180kHz	SOT-23	16ss	DC2	3d	Nln
A5	-	1S2837	Si-diode	Dual, Sw, Fast, 35V, 150mA, <4ms	SOT-23	16dg	-	3a	Nec
A5	-	MC2834	Si-diode	Sw, Hi-sp, 50V, 100mA, Vf<1.2V(100mA), 1.3pF, <4ns	SC-59	16dr	-	3a	Mit
A5	-	MC2844	Si-diode	Sw, Hi-sp, 50V, 100mA, Vf<1.2V(100mA), 1.3pF, <4ns	SOT-323	16dr	-	3a	Mit
A5	-	MC2854	Si-diode	Sw, Hi-sp, 50V, 100mA, Vf<1.2V(100mA), 1.3pF, <4ns	SC-90	16dr	-	3a	Mit
A5	-	MMBD2837	Si-diode	Dual, Sw, 30V, 150mA, 225mW, Vf>1.2V(100mA), <4ns	SOT-23	16dg	-	3a	Ons
A5	-	R3113D151A	Vdet-IC	1.5V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
A5	-	RT9161-21CV	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
A5	-	Si2305DS	p-MOSFET	V-MOS, LogL, 8V, 3.5A, <108mΩ	SOT-23	16fh	-	3a	Six
A5	-	SP809NEK-4-0	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Sip
A5	-	TMPD2837	Si-diode	GP, Dual, 35V, 500mA, Vf<1V(10mA), Cd<4pF, <4ns	SOT-23	16df	-	3a	All
A5	cb	MIC803-40D3VC3	Vdet-IC	4.0V±2.5%, -Reset ODO, 140ms	SC-70	16vdc	VD7	3a	Mcr
A5	cb	MIC803-40D3VM3	Vdet-IC	4.0V±2.5%, -Reset ODO, 140ms	SOT-23	16vdc	VD7	3a	Mcr
A5-	-	RT9818A-41PU3	Vdet-IC	4.1V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Rct
A50	-	XC31PNS0050AM	LVR-IC	Temperature Sensitive, -T°factor, 5V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A50	-	XC31PPS0050AM	LVR-IC	Temperature Sensitive, +T°factor, 5V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A50A	-	ML6101C502M	Vdet-IC	5.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A51	-	XC31PNS0051AM	LVR-IC	Temperature Sensitive, -T°factor, 5.1V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A51	-	XC31PPS0051AM	LVR-IC	Temperature Sensitive, +T°factor, 5.1V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A51A	-	ML6101C512M	Vdet-IC	5.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A52	-	XC31PNS0052AM	LVR-IC	Temperature Sensitive, -T°factor, 5.2V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A52	-	XC31PPS0052AM	LVR-IC	Temperature Sensitive, +T°factor, 5.2V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A52A	-	ML6101C522M	Vdet-IC	5.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A53	-	XC31PNS0053AM	LVR-IC	Temperature Sensitive, -T°factor, 5.3V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A53	-	XC31PPS0053AM	LVR-IC	Temperature Sensitive, +T°factor, 5.3V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A53A	-	ML6101C532M	Vdet-IC	5.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A54	-	XC31PNS0054AM	LVR-IC	Temperature Sensitive, -T°factor, 5.4V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A54	-	XC31PPS0054AM	LVR-IC	Temperature Sensitive, +T°factor, 5.4V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A54A	-	ML6101C542M	Vdet-IC	5.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A55	-	XC31PNS0055AM	LVR-IC	Temperature Sensitive, -T°factor, 5.5V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A55	-	XC31PPS0055AM	LVR-IC	Temperature Sensitive, +T°factor, 5.5V±5%, 50mA	SOT-23	16cg	VR1	3d	Tor
A55A	-	ML6101C552M	Vdet-IC	5.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A56A	-	ML6101C562M	Vdet-IC	5.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A57A	-	ML6101C572M	Vdet-IC	5.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A58A	-	ML6101C582M	Vdet-IC	5.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A59A	-	ML6101C592M	Vdet-IC	5.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A5E	-	LN2351P1552M	DC-DC-IC	PFM step-up, 1.5V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A5F	-	LN2351P1652M	DC-DC-IC	PFM step-up, 1.6V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A5H	-	LN2351P1752M	DC-DC-IC	PFM step-up, 1.7V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A5K	-	LN2351P1852M	DC-DC-IC	PFM step-up, 1.8V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A5L	-	LN2351P1952M	DC-DC-IC	PFM step-up, 1.9V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A5M	-	LN2351P2052M	DC-DC-IC	PFM st-up, 2.0V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A5N	-	LN2351P2152M	DC-DC-IC	PFM st-up, 2.1V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A5P	-	LN2351P2252M	DC-DC-IC	PFM st-up, 2.2V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A5R	-	LN2351P2352M	DC-DC-IC	PFM st-up, 2.3V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A5S	-	LN2351P2452M	DC-DC-IC	PFM st-up, 2.4V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A5T	-	LN2351P2552M	DC-DC-IC	PFM st-up, 2.5V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A5U	-	LN2351P2652M	DC-DC-IC	PFM st-up, 2.6V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A5V	-	LN2351P2752M	DC-DC-IC	PFM st-up, 2.7V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A5X	-	LN2351P2852M	DC-DC-IC	PFM st-up, 2.8V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A5Y	-	LN2351P2952M	DC-DC-IC	PFM st-up, 2.9V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A5Z	-	LN2351P3052M	DC-DC-IC	PFM st-up, 3.0V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6	-	1S2838	Si-diode	Dual, Sw, Fast, 75V, 150mA, <4ms	SOT-23	16dg	-	3a	Nec
A6	-	AP431W	Vref-IC	Adjustable, Precision, Shunt, 2.495V±1%	SOT-23-3L	16rc	RF1	3b	Ana
A6	-	BAS16	Si-diode	Sw, Fast, 75V, 215mA, 370mW, <6ns	SOT-23	16dc	-	3a	Pjt
A6	-	BAS16L	Si-diode	Sw, Fast, 75V, 215mA, 250mW, <6ns	SOT-23	16dc	-	3a	Ons
A6	-	BAS16PT	Si-diode	Sw, 100V, 150mA, Vf<1.25V(150mA), 4ns	SOT-23	16dc	-	3a	Chm
A6	-	BAS16T	Si-diode	Sw, Fast, 75V, 215mA, 250mW, <6ns	SOT-416	16dc	-	3a	Nxp
A6	-	BAS16W	Si-diode	Sw, Fast, 75V, 300mA, Vf<1.25V(150mA), 4ns, 2pF	SOT-323	16dc	-	3a	Ons
A6	-	DCC015	Si-diode	Dual, Hi-Speed-Sw, 75V, 100mA, Vf=1.2V(0.1A), 4pF, 5ns	MCP	16dg	-	3a	San
A6	-	MC2838	Si-diode	Dual, Sw, Hi-sp, 50V, 100mA, Vf<1.2V(100mA), 1.3pF, <3ns	SC-59	16dg	-	3a	Mit
A6	-	MC2848	Si-diode	Dual, Sw, Hi-sp, 50V, 100mA, Vf<1.2V(100mA), 1.3pF, <3ns	SOT-323	16dg	-	3a	Mit
A6	-	MC2858	Si-diode	Dual, Sw, Hi-sp, 50V, 100mA, Vf<1.2V(100mA), 1.3pF, <3ns	SC-90	16dg	-	3a	Mit
A6	-	MMBD4448HTA	Si-diode	Dual, Sw, Fast, 75V, 500mA, Vf<1.25V(150mA), <4ns	SOT-523	16df	-	3a	Di
A6	-	R3113D161A	Vdet-IC	1.6V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
A6	-	R3130N16EC	Vdet-IC	1.6V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
A6	-	RT9161-22CV	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
A6	-	Si2306DS	n-MOSFET	V-MOS, 30V, ±2.5A, <94mΩ(2.5A)	SOT-23	16fh	-	3a	Six
A6	-	TMPD2838	Si-diode	GP, Dual, 75V, 500mA, Vf<1V(10mA), Cd<4pF, <6ns	SOT-23	16dg	-	3a	All
A6	cb	MIC803-40D4VC3	Vdet-IC	4.0V±2.5%, -Reset ODO, 1120ms	SC-70	16vdc	VD7	3a	Mcr
A6	cb	MIC803-40D4VM3	Vdet-IC	4.0V±2.5%, -Reset ODO, 1120ms	SOT-23	16vdc	VD7	3a	Mcr
A6-	-	BAS16	Si-diode	Sw, Fast, 75V, 215mA, 250mW, <6ns	SOT-23	16dc	-	3a	NxH
A6-	-	BAS16W	Si-diode	Sw, Fast, 75V, 215mA, 250mW, <6ns	SOT-323	16dc	-	3a	NxH
A6-	-	RT9818A-42PU3	Vdet-IC	4.2V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Rct
A60	-	LN2351P3152M	DC-DC-IC	PFM st-up, 3.1V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A60A	-	ML6101C602M	Vdet-IC	6.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
A61	-	LN2351P3252M	DC-DC-IC	PFM st-up, 3.2V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A61	-	MC2838	Si-diode	Dual, Sw, 50V, 100mA, Vf<1.2V(100mA), 3ns, <4pF	SOT-23	16dg	-	3a	Jce
A62	-	LN2351P3352M	DC-DC-IC	PFM st-up, 3.3V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A63	-	FZTA63	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>5000, >125MHz	SOT-23	16ta	-	3a	Zx
A63	-	LN2351P3452M	DC-DC-IC	PFM st-up, 3.4V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A64	-	LN2351P3552M	DC-DC-IC	PFM st-up, 3.5V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A65	-	LN2351P3652M	DC-DC-IC	PFM st-up, 3.6V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A66	-	LN2351P3752M	DC-DC-IC	PFM st-up, 3.7V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A67	-	LN2351P3852M	DC-DC-IC	PFM st-up, 3.8V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A68	-	LN2351P3952M	DC-DC-IC	PFM st-up, 3.9V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A69	-	LN2351P4052M	DC-DC-IC	PFM st-up, 4.0V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6A	-	LN2351P4152M	DC-DC-IC	PFM st-up, 4.1V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6A	-	MMUN2111	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k	SOT-23	16ta	-	3a	Mot
A6B	-	LN2351P4252M	DC-DC-IC	PFM st-up, 4.2V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6B	-	MMUN2112	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k	SOT-23	16ta	-	3a	Mot
A6C	-	LN2351P4352M	DC-DC-IC	PFM st-up, 4.3V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6C	-	MMUN2113	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/47k	SOT-23	16ta	-	3a	Mot
A6D	-	LN2351P4452M	DC-DC-IC	PFM st-up, 4.4V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6D	-	MMUN2114	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10/47k	SOT-23	16ta	-	3a	Mot
A6E	-	LN2351P4552M	DC-DC-IC	PFM st-up, 4.5V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6E	-	MMUN2115	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=10k	SOT-23	16ta	-	3a	Mot
A6F	-	LN2351P4652M	DC-DC-IC	PFM st-up, 4.6V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6F	-	MMUN2116	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=4k7	SOT-23	16ta	-	3a	Mot
A6G	-	MMUN2130	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=1k/1k0	SOT-23	16ta	-	3a	Mot
A6H	-	LN2351P4752M	DC-DC-IC	PFM st-up, 4.7V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6H	-	MMUN2131	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2k2/2k2	SOT-23	16ta	-	3a	Mot
A6J	-	MMUN2132	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4k/4k7	SOT-23	16ta	-	3a	Mot
A6K	-	LN2351P4852M	DC-DC-IC	PFM st-up, 4.8V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A6K	-	MMUN2133	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4k7/47k	SOT-23	16ta	-	3a	Mot
A6L	-	LN2351P4952M	DC-DC-IC	PFM st-up, 4.9V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6L	-	MMUN2134	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k	SOT-23	16ta	-	3a	Mot
A6M	-	LN2351P5052M	DC-DC-IC	PFM st-up, 5.0V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6N	-	LN2351P5152M	DC-DC-IC	PFM st-up, 5.1V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6p	-	BAS16	Si-diode	Sw, Fast, 75V, 215mA, 250mW, <6ns	SOT-23	16dc	-	3a	NxH
A6p	-	BAS16W	Si-diode	Sw, Fast, 75V, 215mA, 250mW, <6ns	SOT-323	16dc	-	3a	NxH
A6P	-	LN2351P5252M	DC-DC-IC	PFM st-up, 5.2V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6R	-	LN2351P5352M	DC-DC-IC	PFM st-up, 5.3V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6s	-	BAS16	Si-diode	Sw, Fast, 75V, 215mA, 370mW, <6ns	SOT-23	16dc	-	3c	Inf
A6s	-	BAS16W	Si-diode	Sw, Fast, 75V, 300mA, Vf<1.25V(150mA), 4ns, 2pF	SOT-323	16dc	-	3c	Inf
A6S	-	LN2351P5452M	DC-DC-IC	PFM st-up, 5.4V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6t	-	BAS16	Si-diode	Sw, Fast, 75V, 215mA, 250mW, <6ns	SOT-23	16dc	-	3a	NxM
A6t	-	BAS16W	Si-diode	Sw, Fast, 75V, 215mA, 250mW, <6ns	SOT-323	16dc	-	3a	NxM
A6T	-	LN2351P5552M	DC-DC-IC	PFM st-up, 5.5V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6U	-	LN2351P5652M	DC-DC-IC	PFM st-up, 5.6V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6V	-	LN2351P5752M	DC-DC-IC	PFM st-up, 5.7V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6W	-	BAS16	Si-diode	Sw, Fast, 75V, 215mA, 250mW, <6ns	SOT-23	16dc	-	3a	NxC
A6W	-	BAS16W	Si-diode	Sw, Fast, 75V, 215mA, 250mW, <6ns	SOT-323	16dc	-	3a	NxC
A6X	-	LN2351P5852M	DC-DC-IC	PFM st-up, 5.8V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6Y	-	LN2351P5952M	DC-DC-IC	PFM st-up, 5.9V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A6Z	-	LN2351P6052M	DC-DC-IC	PFM st-up, 6.0V±2%, 400mA, 300kHz	SOT-23	16ss	DC2	3d	Nln
A7	-	1SS123	Si-diode	Dual, Sw, Fast, 70V, 100mA, Vf<1.3V(100mA), <9ns	SOT-23	16dl	-	3a	Nec
A7	-	AP431AW	Vref-IC	Adjustable, Precision, Shunt, 2.495V±0.5%	SOT-23-3L	16rc	RF1	3b	Ana
A7	-	BAV99	Si-diode	Dual, U-Sp, 70V, 125mA, Vf<1.2V(100mA), 0.5pF, 4ns	SOT-23	16dl	-	3a	All
A7	-	BAV99L	Si-diode	Dual, U-Sp, 70V, 215mA, Vf<1.2V(100mA), 0.5pF, 4ns	SOT-23	16dl	-	3b	Ons
A7	-	BAV99PT	Si-diode	Dual, Sw, 85V, 150mA, Vf<1.25V(150mA), 4ns	SOT-23	16dl	-	3a	Chm
A7	-	BAV99TPT	Si-diode	Dual, Sw, 85V, 150mA, Vf<1.25V(150mA), 4ns	SOT-416	16dl	-	3a	Chm
A7	-	BAV99U	Si-diode	Dual, U-Sp, 80V, 100mA, Vf<1.2V(100mA), 0.5pF, 4ns	SOT-323	16dl	-	3a	Rhm
A7	-	BAV99W	Si-diode	Dual, U-Sp, 70V, 215mA, Vf<1.2V(100mA), 0.5pF, 4ns	SOT-323	16dl	-	3a	Ons
A7	-	BAV99WPT	Si-diode	Dual, Sw, 85V, 150mA, Vf<1.25V(150mA), 4ns	SOT-323	16dl	-	3a	Chm
A7	-	CH204KPT	Si-diode	Dual, Sw, 20V, 100mA, Vf<1V(10mA), 4ns	SOT-23	16dl	-	3a	Chm
A7	-	CH204UPT	Si-diode	Dual, Sw, 20V, 100mA, Vf<1V(10mA), 4ns	SOT-323	16dl	-	3a	Chm
A7	-	CH221PT	Si-diode	Dual, Sw, 20V, 100mA, Vf<1V(10mA), 4ns	SOT-416	16dl	-	3a	Chm
A7	-	CH228UPT	Si-diode	Dual, Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	SOT-323	16dl	-	3a	Chm
A7	-	CHN217PT	Si-diode	Dual, Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	SOT-23	16dl	-	3a	Chm
A7	-	CHN217UPT	Si-diode	Dual, Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	SOT-323	16dl	-	3a	Chm
A7	-	DAN217U	Si-diode	Dual, U-Sp, 80V, 100mA, Vf<1.2V(100mA), 0.5pF, 4ns	UMD3	16dl	-	3i	Rhm
A7	-	KN4A4M	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1/R2=10k/10k	SOT-416	16ta	-	3a	Nec
A7	-	MC2840	Si-diode	Dual, Sw, Hi-sp, 30V, 100mA, Vf<1.4V(100mA), <4ns	SC-59	16dl	-	3a	Mit
A7	-	MMBD4448HTC	Si-diode	Dual, Sw, Fast, 75V, 500mA, Vf<1.25V(150mA), <4ns	SOT-523	16dg	-	3a	Di
A7	-	R3113D171A	Vdet-IC	1.7V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
A7	-	R3130N17EC	Vdet-IC	1.7V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
A7	-	RT9161-23CV	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
A7	-	Si2307DS	p-MOSFET	V-MOS, 30V, 3A, <140mΩ(2.5A)	SOT-23	16fh	-	3a	Six
A7-	-	RT9818A-25PU3	Vdet-IC	2.5V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Rct
A70	-	BAS70	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dc	-	3a	Pjt
A70	-	BAS70W	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dc	-	3a	Pjt
A72	-	BAS70A	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16df	-	3a	Pjt
A72	-	BAS70AW	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16df	-	3a	Pjt
A73	-	BAS70C	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dg	-	3a	Pjt
A73	-	BAS70CW	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dg	-	3a	Pjt
A74	-	BAS70S	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dl	-	3a	Pjt
A74	-	BAS70SW	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dl	-	3a	Pjt
A7p	-	BAV99	Si-diode	Dual, U-Sp, 75V, 125mA, Vf<1.2V(100mA), 0.5pF, 4ns	SOT-23	16dl	-	3a	PhH
A7s	-	BAV99	Si-diode	Dual, U-Sp, 80V, 150mA, Vf<1.2V(100mA), 0.5pF, 4ns	SOT-23	16dl	-	3a	Sie
A7s	-	BAV99W	Si-diode	Dual, U-Sp, 75V, 125mA, Vf<1.2V(100mA), 0.5pF, 4ns	SOT-323	16dl	-	3a	Sie
A7t	-	BAV99	Si-diode	Dual, U-Sp, 75V, 125mA, Vf<1.2V(100mA), 0.5pF, 4ns	SOT-23	16dl	-	3a	PhM
A7W	-	BAV99	Si-diode	Dual, U-Sp, 75V, 125mA, Vf<1.2V(100mA), 0.5pF, 4ns	SOT-23	16dl	-	3a	PhC
A8	-	AP431R	Vref-IC	Adjustable, Precision, Shunt, 2.495V±1%	SOT-23-3L	16rd	RF1	3b	Ana
A8	-	AP8821C-08GC	Vdet-IC	0.8V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
A8	-	AP8821C-08GT	Vdet-IC	0.8V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
A8	-	AP8821C-08PC	Vdet-IC	0.8V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
A8	-	AP8821C-08PT	Vdet-IC	0.8V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
A8	-	BAS19	Si-diode	Sw, Fast, 120V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	Pjt
A8	-	MC2835	Si-diode	Dual, Sw, Hi-speed, 30V, 100mA, Vf<1.4V(100mA), <4ns	SC-59	16ea	-	3a	Mit
A8	-	MC2845	Si-diode	Dual, Sw, Hi-speed, 30V, 100mA, Vf<1.4V(100mA), <4ns	SOT-323	16ea	-	3a	Mit
A8	-	R3113D181A	Vdet-IC	1.8V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
A8	-	R3130N18EC	Vdet-IC	1.8V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
A8	-	RT9161-24CV	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A8	-	Si2308DS	n-MOSFET	V-MOS, 60V, ±2A, <220mΩ(1.5A)	SOT-23	16fh	-	3a	Six
A80	-	BAS20	Si-diode	Sw, Fast, 150V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	Pjt
A81	-	BAS20	Si-diode	Sw, Fast, 150V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	Zx
A82	-	BAS21	Si-diode	Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	Pjt
A83	-	XC61CC0802M	Vdet-IC	0.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
A8A	-	MMUN2211	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SOT-23	16ta	-	3a	Mot
A8B	-	MMUN2212	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SOT-23	16ta	-	3a	Mot
A8C	-	MMUN2213	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SOT-23	16ta	-	3a	Mot
A8D	-	MMUN2214	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10/47k	SOT-23	16ta	-	3a	Mot
A8E	-	MMUN2215	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=10k	SOT-23	16ta	-	3a	Mot
A8F	-	MMUN2216	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=4k7	SOT-23	16ta	-	3a	Mot
A8G	-	MMUN2230	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=1k/1k0	SOT-23	16ta	-	3a	Mot
A8H	-	MMUN2231	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2k2/2k2	SOT-23	16ta	-	3a	Mot
A8J	-	MMUN2232	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4k/4k7	SOT-23	16ta	-	3a	Mot
A8K	-	MMUN2233	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4k7/47k	SOT-23	16ta	-	3a	Mot
A8L	-	MMUN2234	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	SOT-23	16ta	-	3a	Mot
A8N	-	MMUN2236	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	SOT-23	16ta	-	3a	Mot
A8P	-	MMUN2237	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	SOT-23	16ta	-	3a	Mot
A8R	-	MMUN2238	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=2k2	SOT-23	16ta	-	3a	Mot
A8U	-	MMUN2241	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=100k	SOT-23	16ta	-	3a	Mot
A9	-	1SS294	Si-diode	Schottky, 45V, 100mA, Vf<0.6V(100mA)	SC-59	16dc	-	3a	Tos
A9	-	1SS322	Si-diode	Schottky, 40V, 0.1A	SOT-323	16dc	-	3a	Tos
A9	-	AP431AR	Vref-IC	Adjustable, Precision, Shunt, 2.495V±0.5%	SOT-23-3L	16rd	RF1	3b	Ana
A9	-	AP8821C-09GC	Vdet-IC	0.9V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
A9	-	AP8821C-09GT	Vdet-IC	0.9V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
A9	-	AP8821C-09PC	Vdet-IC	0.9V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
A9	-	AP8821C-09PT	Vdet-IC	0.9V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
A9	-	BZX84C9V1	Z-diode	8.5..9.6V, Zzt=15Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
A9	-	ELM9709NBB	Vdet-IC	0.9V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
A9	-	R3111N092A	Vdet-IC	0.9V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
A9	-	R3113D191A	Vdet-IC	1.9V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
A9	-	R3130N19EC	Vdet-IC	1.9V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
A9	-	RT9161-26CV	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
A9	-	Si2309DS	p-MOSFET	V-MOS, 60V, 1.25A, <550mΩ(5A)	SOT-23	16fh	-	3a	Six
A91	-	BAS17	Si-Stabistor	Stabistor, 5V, 200mA, 250mW, 140pF	SOT-23	16dc	-	3a	Phi
A91	-	CBAS17	Si-Stabistor	Stabistor, 5V, 250mA, 350mW, 140pF	SOT-23	16dc	-	3a	Cen
A93	-	XC61CC0902M	Vdet-IC	0.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
A9T	-	DTA114T-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=10k	SOT-523	16ta	-	3a	Utc
aA	-	BU45K232G	Vdet-IC	2.3V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Aa	-	BD48K23G	Vdet-IC	2.3V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
AA	-	2SA1864	Si-pnp-Digi	Mute, 15V, 100mA, 150mW, 600MHz, R1/R2=4k7/4k7	SOT-23	16ta	-	3a	San
AA	-	2SC4213	Si-npn	Sw, 50V, 300mA, 100mW, 300MHz, B=200..1200	SOT-23	16ta	-	3a	Tos
AA	-	BCW60A	Si-npn	GP, 32V, 200mA, 250mW, B=120..220, 250MHz	SOT-23	16ta	-	3a	Itt
AA	-	IMP809LEUR	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Imp
AA	-	KRA351	Si-pnp-Digi	Dual, Sw, 12V, 500mA, 100mW, R1/R2=1k/1k	USM	16ta	-	3f	Kec
AA	-	MMBZ5225B	Z-diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 350mW	SOT-23	16dc	-	3c	Jiy
AA	-	PT7M7809LT	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Pti
AA	-	RT9161-28CV	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AA	cb	MIC803-26D2VC3	Vdet-IC	2.63V±2.5%, -Reset ODO, 20ms	SC-70	16vdc	VD7	3a	Mcr
AA	cb	MIC803-26D2VM3	Vdet-IC	2.63V±2.5%, -Reset ODO, 20ms	SOT-23	16vdc	VD7	3a	Mcr
AA	cu	PT7M7809LTE	Vdet-IC	4.63V±1.5%, -Reset PPO, Lead free	SOT-23	16vdc	VD7	3b	Pti
-AA	-	PDTC144VT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/10k	SOT-23	16ta	-	3a	NxH
AA-	-	RT9161-28PV	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AA-	-	RT9818A-33PU3	Vdet-IC	3.3V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Rct
AA1	-	FA4A4M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/10k	SC-59	16ta	-	3a	Nec
AA1	-	GA4A4M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/10k	SOT-323	16ta	-	3a	Nec
AAA	-	AME8800AEET	LVR-IC	LDO, 3.3V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AAA	-	AME8800AEETL	LVR-IC	LDO, 3.3V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AAA	-	MAX6806XR46-T	Vdet-IC	4.6V±1.5%, -Reset PPO	SOT-323	16vdb	VD7	3b	Max
AAA	cm	AME8800AEETY	LVR-IC	LDO, 3.3V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AAA	cm	AME8800AEETZ	LVR-IC	LDO, 3.3V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AAAA	-	HWD809LEU	Vdet-IC	4.63V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Csm
AAAA	-	MAX809LUR	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
AAB	-	AME8800BEET	LVR-IC	LDO, 3.0V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AAB	-	AME8800BEETL	LVR-IC	LDO, 3.0V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AAB	-	MAX6806XR26-T	Vdet-IC	2.6V±1.5%, -Reset PPO	SOT-323	16vdb	VD7	3b	Max
AAB	cm	AME8800BEETY	LVR-IC	LDO, 3.0V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AAB	cm	AME8800BEETZ	LVR-IC	LDO, 3.0V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AABA	-	HWD809MEU	Vdet-IC	4.38V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Csm
AAC	-	AME8800CEET	LVR-IC	LDO, 2.8V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AAC	-	AME8800CEETL	LVR-IC	LDO, 2.8V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AAC	-	MAX6806XR23-T	Vdet-IC	2.3V±1.5%, -Reset PPO	SOT-323	16vdb	VD7	3b	Max
AAC	-	PAM3101AAA150	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3b	Pam
AAC	-	PAM3101GUA150	LVR-IC	LDO, 1.5V±2%, 300mA	SC-70-3L	16vj	VR1	3b	Pam
AAC	cm	AME8800CEETY	LVR-IC	LDO, 2.8V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AAC	cm	AME8800CEETZ	LVR-IC	LDO, 2.8V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AAD	-	AME8800DEET	LVR-IC	LDO, 2.5V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AAD	-	AME8800DEETL	LVR-IC	LDO, 2.5V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AAD	-	MAX6807XR46-T	Vdet-IC	4.6V±1.5%, +Reset PPO	SOT-323	16vdb	VD7	3b	Max
AAD	-	TMPD4448	Si-diode	Switching, 100V, 600mA, Vf<1V(100mA), Cd<4pF, <4ns	SOT-23	16dc	-	3a	All
AAD	cm	AME8800DEETY	LVR-IC	LDO, 2.5V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AAD	cm	AME8800DEETZ	LVR-IC	LDO, 2.5V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AAE	-	AME8800EEET	LVR-IC	LDO, 3.8V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AAE	-	AME8800EEETL	LVR-IC	LDO, 3.8V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AAE	-	MAX6807XR26-T	Vdet-IC	2.6V±1.5%, +Reset PPO	SOT-323	16vdb	VD7	3b	Max
AAE	-	PAM3101AAA180	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3b	Pam
AAE	-	PAM3101GUA180	LVR-IC	LDO, 1.8V±2%, 300mA	SC-70-3L	16vj	VR1	3b	Pam
AAE	cm	AME8800EEETY	LVR-IC	LDO, 3.8V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AAE	cm	AME8800EEETZ	LVR-IC	LDO, 3.8V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AAF	-	MAX6808XR46-T	Vdet-IC	4.6V±1.5%, -Reset ODO	SOT-323	16vdb	VD6	3b	Max
AAG	-	MAX6808XR26-T	Vdet-IC	2.6V±1.5%, -Reset ODO	SOT-323	16vdb	VD6	3b	Max
AAG	-	MMBR951A	Si-npn	UHF, 20V, 100mA, 322mW, B=50..200, 8GHz	SOT-23	16ta	-	3a	Mot
AAG	-	PAM3101AAA250	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3b	Pam
AAG	-	PAM3101GUA250	LVR-IC	LDO, 2.5V±2%, 300mA	SC-70-3L	16vj	VR1	3b	Pam
AAH	-	MAX6326_R22-T	Vdet-IC	2.2V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	Max
AAH	-	PAM3101AAA280	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3b	Pam
AAH	-	PAM3101GUA280	LVR-IC	LDO, 2.8V±2%, 300mA	SC-70-3L	16vj	VR1	3b	Pam
AAI	-	MAX6327XR22-T	Vdet-IC	2.2V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	Max
AAI	-	PAM3101AAA285	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-23	16cg	VR1	3b	Pam
AAI	-	PAM3101GUA285	LVR-IC	LDO, 2.85V±2%, 300mA	SC-70-3L	16vj	VR1	3b	Pam
AAJ	-	MAX6328XR22-T	Vdet-IC	2.2V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Max
AAJ	-	PAM3101AAA300	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3b	Pam
AAJ	-	PAM3101GUA300	LVR-IC	LDO, 3.0V±2%, 300mA	SC-70-3L	16vj	VR1	3b	Pam
AAK	-	PAM3101AAA330	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3b	Pam
AAK	-	PAM3101GUA330	LVR-IC	LDO, 3.3V±2%, 300mA	SC-70-3L	16vj	VR1	3b	Pam
AAM	-	PAM3101AAA400	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23	16cg	VR1	3b	Pam
AAM	-	PAM3101GUA400	LVR-IC	LDO, 4.0V±2%, 300mA	SC-70-3L	16vj	VR1	3b	Pam
AAN	-	HWD809LEX	Vdet-IC	4.63V±2%, -Reset PPO	SC-70	16vdc	VD7	3a	Csm
AAN	-	MAX809LXR	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	Max
AAO	-	2SA1979SF-O	Si-pnp	AF, 40V, 500mA, 200mW, B=70..140, 200MHz	SOT-23F	18ta	-	3a	Auk
AAO	-	2SA1979S-O	Si-pnp	AF, 40V, 500mA, 200mW, B=70..140, 200MHz	SOT-23	16ta	-	3a	Auk
AAO	-	HWD809MEX	Vdet-IC	4.38V±2%, -Reset PPO	SC-70	16vdc	VD7	3a	Csm
AAO	-	MAX809MXR	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	Max
AAO	-	PAM3101AAA380	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23	16cg	VR1	3b	Pam
AAO	-	PAM3101GUA380	LVR-IC	LDO, 3.8V±2%, 300mA	SC-70-3L	16vj	VR1	3b	Pam
AAP	-	HWD809TEX	Vdet-IC	3.08V±2%, -Reset PPO	SC-70	16vdc	VD7	3a	Csm
AAP	-	MAX809TXR	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	Max
AAP	-	PAM3101AAA310	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16cg	VR1	3b	Pam
AAP	-	PAM3101GUA310	LVR-IC	LDO, 3.1V±2%, 300mA	SC-70-3L	16vj	VR1	3b	Pam
AAQ	-	2SD1757K-Q	Si-npn	Lo-sat, Mute, 30V, 500mA, 200mW, B=120..270, 150MHz	SC-59	16ta	-	3a	Rhm
AAQ	-	HWD809SEX	Vdet-IC	2.93V±2%, -Reset PPO	SC-70	16vdc	VD7	3a	Csm
AAQ	-	MAX809SXR	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	Max
AAQ	-	PAM3101AAA290	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23	16cg	VR1	3b	Pam
AAQ	-	PAM3101GUA290	LVR-IC	LDO, 2.9V±2%, 300mA	SC-70-3L	16vj	VR1	3b	Pam
AAR	-	2SD1757K-R	Si-npn	Lo-sat, Mute, 30V, 500mA, 200mW, B=180..390, 150MHz	SC-59	16ta	-	3a	Rhm
AAR	-	MAX809RXR	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	Max
AAR	-	TMPD4153	Si-diode	Switching, 75V, 600mA, Vf<1V(20mA), Cd<2pF, <4ns	SOT-23	16dc	-	3a	All
AAs	-	BCW60A	Si-npn	GP, 32V, 200mA, 250mW, B=120..220, 250MHz	SOT-23	16ta	-	3a	Sie
AAS	-	2SD1757K-S	Si-npn	Lo-sat, Mute, 30V, 500mA, 200mW, B=270..560 , 150MHz	SC-59	16ta	-	3a	Rhm
AAS	-	HWD809ZEX	Vdet-IC	2.32V±2%, -Reset PPO	SC-70	16vdc	VD7	3a	Csm
AAS	-	MAX803ZXR	Vdet-IC	2.32V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Max
AAT	-	HWD810LEX	Vdet-IC	4.63V±2%, +Reset PPO	SC-70	16vdc	VD7	3a	Csm
AAT	-	MAX810LXR	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	Max
AAT	-	PAM3101AAA475	LVR-IC	LDO, 4.75V±2%, 300mA	SOT-23	16cg	VR1	3b	Pam
AAT	-	PAM3101GUA475	LVR-IC	LDO, 4.75V±2%, 300mA	SC-70-3L	16vj	VR1	3b	Pam
AAU	-	HWD810MEX	Vdet-IC	4.38V±2%, +Reset PPO	SC-70	16vdc	VD7	3a	Csm
AAU	-	MAX810MXR	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	Max
AAV	-	HWD810TEX	Vdet-IC	3.08V±2%, +Reset PPO	SC-70	16vdc	VD7	3a	Csm
AAV	-	MAX810TXR	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	Max
AAW	-	HWD810REX	Vdet-IC	2.63V±2%, +Reset PPO	SC-70	16vdc	VD7	3a	Csm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AAW	-	MAX810RXR	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	Max
AAX	-	HWD810SEX	Vdet-IC	2.93V±2%, +Reset PPO	SC-70	16vdc	VD7	3a	Csm
AAX	-	MAX810SXR	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	Max
AAY	-	2SA1979SF-Y	Si-pnp	AF, 40V, 500mA, 200mW, B=120..240, 200MHz	SOT-23F	18ta	-	3a	Auk
AAY	-	2SA1979S-Y	Si-pnp	AF, 40V, 500mA, 200mW, B=120..240, 200MHz	SOT-23	16ta	-	3a	Auk
AAY	-	HWD810ZEX	Vdet-IC	2.32V±2%, +Reset PPO	SC-70	16vdc	VD7	3a	Csm
AAY	-	MAX810ZXR	Vdet-IC	2.32V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	Max
AAZ	-	HWD803LEX	Vdet-IC	4.63V±2%, -Reset ODO	SC-70	16vdc	VD6	3a	Csm
AAZ	-	MAX803LXR	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Max
aB	-	BU45K242G	Vdet-IC	2.4V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Ab	-	BD48K24G	Vdet-IC	2.4V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
AB	-	2SD1101B	Si-npn	GP, 25V, 700mA, 150mW, B=85..170	SC-59A	16ta	-	3a	Ren
AB	-	BCW60B	Si-npn	GP, 32V, 200mA, 250mW, B=150..310, 250MHz	SOT-23	16ta	-	3a	Itt
AB	-	IMP809MEUR	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Imp
AB	-	KRA352	Si-pnp-Digi	Dual, Sw, 12V, 500mA, 100mW, R1/R2=2.2k/2.2k	USM	16ta	-	3f	Kec
AB	-	MMBD4448HTS	Si-diode	Dual, Sw, Fast, 75V, 500mA, Vf<1.25V(150mA), <4ns	SOT-523	16dl	-	3a	Di
AB	-	MMBZ5226B	Z-diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 350mW	SOT-23	16dc	-	3c	Jiy
AB	-	PT7M7809MT	Vdet-IC	4.26V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Pti
AB	-	RT9161-29CV	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AB	cb	MIC803-26D3VC3	Vdet-IC	2.63V±2.5%, -Reset ODO, 140ms	SC-70	16vdc	VD7	3a	Mcr
AB	cb	MIC803-26D3VM3	Vdet-IC	2.63V±2.5%, -Reset ODO, 140ms	SOT-23	16vdc	VD7	3a	Mcr
AB	cu	PT7M7809MTE	Vdet-IC	4.26V±1.5%, -Reset PPO, Lead free	SOT-23	16vdc	VD7	3b	Pti
AB-	-	RT9818A-31PU3	Vdet-IC	3.1V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Rct
AB1	-	FA4F4M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/22k	SC-59	16ta	-	3a	Nec
AB1	-	GA4F4M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/22k	SOT-323	16ta	-	3a	Nec
AB3T	-	DTA113TL-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1=1k	SOT-23	16ta	-	3a	Utc
AB3T	df	DTA113TG-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=1k, Halogen free	SOT-23	16ta	-	3a	Utc
AB4E	-	DTA114EL-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	Utc
AB4E	-	DTA114EL-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	SOT-323	16ta	-	3a	Utc
AB4E	-	DTA114EL-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=10k/10k	SOT-523	16ta	-	3a	Utc
AB4E	df	DTA114EG-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k, Halogen free	SOT-23	16ta	-	3a	Utc
AB4E	df	DTA114EG-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k, Halogen free	SOT-323	16ta	-	3a	Utc
AB4E	df	DTA114EG-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=10k/10k, Halogen free	SOT-523	16ta	-	3a	Utc
AB4T	-	DTA114T-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	SOT-23	16ta	-	3a	Utc
AB4T	-	DTA114T-AL3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=10k	SOT-323	16ta	-	3a	Utc
AB4T	-	DTA114TL-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	SOT-23	16ta	-	3a	Utc
AB4T	-	DTA114TL-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	SOT-323	16ta	-	3a	Utc
AB4T	-	DTA114TL-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=10k	SOT-523	16ta	-	3a	Utc
AB4T	df	DTA114TG-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=10k, Halogen free	SOT-23	16ta	-	3a	Utc
AB4T	df	DTA114TG-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=10k, Halogen free	SOT-323	16ta	-	3a	Utc
AB4T	df	DTA114TG-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1=10k, Halogen free	SOT-523	16ta	-	3a	Utc
AB4W	-	DTA114WL-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=10k/4.7k	SOT-523	16ta	-	3a	Utc
AB4W	df	DTA114WG-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=10k/4.7k, Halogen free	SOT-523	16ta	-	3a	Utc
AB4Y	-	DTA114YL-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/47k	SOT-23	16ta	-	3a	Utc
AB4Y	-	DTA114YL-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/47k	SOT-323	16ta	-	3a	Utc
AB4Y	-	DTA114YL-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=10k/47k	SOT-523	16ta	-	3a	Utc
AB4Y	df	DTA114YG-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/47k, Halogen free	SOT-23	16ta	-	3a	Utc
AB4Y	df	DTA114YG-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/47k, Halogen free	SOT-323	16ta	-	3a	Utc
AB4Y	df	DTA114YG-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=10k/47k, Halogen free	SOT-523	16ta	-	3a	Utc
AB5E	-	DTA115EL-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=100k/100k	SOT-23	16ta	-	3a	Utc
AB5E	-	DTA115EL-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=100k/100k	SOT-323	16ta	-	3a	Utc
AB5E	-	DTA115EL-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=100k/100k	SOT-523	16ta	-	3a	Utc
AB5E	df	DTA115EG-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=100k/100k, Halogen free	SOT-23	16ta	-	3a	Utc
AB5E	df	DTA115EG-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=100k/100k, Halogen free	SOT-323	16ta	-	3a	Utc
AB5E	df	DTA115EG-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=100k/100k, Halogen free	SOT-523	16ta	-	3a	Utc
AB7	-	APL5102-13AI	LVR-IC	LDO, 1.3V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
AB8	-	APL5102-14AI	LVR-IC	LDO, 1.4V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
AB9	-	APL5102-15AI	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABA	-	APL5102-16AI	LVR-IC	LDO, 1.6V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABA	-	HWD803MEX	Vdet-IC	4.38V±2%, -Reset ODO	SC-70	16vdc	VD6	3a	Csm
ABA	-	MAX803TXR	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Max
ABA	-	TMPD4150	Si-diode	Switching, 75V, 600mA, Vf<1V(200mA), Cd<2.5pF, <4ns	SOT-23	16dc	-	3a	All
ABAA	-	MAX809MUR	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
ABB	-	APL5102-17AI	LVR-IC	LDO, 1.7V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABB	-	HWD803TEX	Vdet-IC	3.08V±2%, -Reset ODO	SC-70	16vdc	VD6	3a	Csm
ABB	-	MAX803MXR	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Max
ABC	-	APL5102-18AI	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABC	-	HWD803SEX	Vdet-IC	2.93V±2%, -Reset ODO	SC-70	16vdc	VD6	3a	Csm
ABC	-	MAX803SXR	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Max
ABC	-	TMPD4154	Si-diode	Switching, 35V, 600mA, Vf<1V(30mA), Cd<4pF, <4ns	SOT-23	16dc	-	3a	All



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABD	-	APL5102-19AI	LVR-IC	LDO, 1.9V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABD	-	HWD803REX	Vdet-IC	2.63V±2%, -Reset ODO	SC-70	16vdc	VD6	3a	Csm
ABD	-	MAX803RXR	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Max
ABE	-	APL5102-20AI	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABE	-	HWD803ZEX	Vdet-IC	2.32V±2%, -Reset ODO	SC-70	16vdc	VD6	3a	Csm
ABE	-	MAX803ZXR	Vdet-IC	2.32V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Max
ABF	-	APL5102-21AI	LVR-IC	LDO, 2.1V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABF	-	LM4041AIX3-1.2+T	Vref-IC	µPower, Precision, Shunt, 1.225V±0.1%, -40..+85°C	SC-70-3	16dk	RF1	3a	Max
ABG	-	2SA1312-GR	Si-pnp	AF, LN, 120V, 100mA, 150mW, B=200..400, 100MHz	SC-59	16ta	-	3a	Tos
ABG	-	APL5102-22AI	LVR-IC	LDO, 2.2V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABG	-	LM4041BIX3-1.2+T	Vref-IC	µPower, Precision, Shunt, 1.225V±0.2%, -40..+85°C	SC-70-3	16dk	RF1	3a	Max
ABH	-	APL5102-23AI	LVR-IC	LDO, 2.3V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABH	-	LM4041CIX3-1.2+T	Vref-IC	µPower, Precision, Shunt, 1.225V±0.5%, -40..+85°C	SC-70-3	16dk	RF1	3a	Max
ABI	-	APL5102-24AI	LVR-IC	LDO, 2.4V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABI	-	LM4041DIX3-1.2+T	Vref-IC	µPower, Precision, Shunt, 1.225V±1%, -40..+85°C	SC-70-3	16dk	RF1	3a	Max
ABJ	-	APL5102-25AI	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABJ	-	LM4040AIX3-2.1+T	Vref-IC	µPower, Precision, Shunt, 2.048V±0.1%	SC-70	16dk	RF1	3a	Max
ABK	-	APL5102-26AI	LVR-IC	LDO, 2.6V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABK	-	LM4040BIX3-2.1+T	Vref-IC	µPower, Precision, Shunt, 2.048V±0.2%	SC-70	16dk	RF1	3a	Max
ABL	-	2SA1312-BL	Si-pnp	AF, LN, 120V, 100mA, 150mW, B=350..700, 100MHz	SC-59	16ta	-	3a	Tos
ABL	-	APL5102-27AI	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABL	-	LM4040CIX3-2.1+T	Vref-IC	µPower, Precision, Shunt, 2.048V±0.5%	SC-70	16dk	RF1	3a	Max
ABM	-	APL5102-28AI	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABM	-	LM4040DIX3-2.1+T	Vref-IC	µPower, Precision, Shunt, 2.048V±1.0%	SC-70	16dk	RF1	3a	Max
ABN	-	AME8800FEET	LVR-IC	LDO, 3.6V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
ABN	-	AME8800FEETL	LVR-IC	LDO, 3.6V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
ABN	-	APL5102-29AI	LVR-IC	LDO, 2.9V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABN	-	LM4040AIX3-2.5+T	Vref-IC	µPower, Precision, Shunt, 2.50V±0.1%	SC-70	16dk	RF1	3a	Max
ABN	cm	AME8800FEETY	LVR-IC	LDO, 3.6V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
ABN	cm	AME8800FEETZ	LVR-IC	LDO, 3.6V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
ABO	-	APL5102-30AI	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABO	-	LM4040BIX3-2.5+T	Vref-IC	µPower, Precision, Shunt, 2.50V±0.2%	SC-70	16dk	RF1	3a	Max
ABp	-	BCW60B	Si-npn	GP, 32V, 200mA, 250mW, B=150..310, 250MHz	SOT-23	16ta	-	3a	PhH
ABP	-	APL5102-31AI	LVR-IC	LDO, 3.1V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABP	-	LM4040CIX3-2.5+T	Vref-IC	µPower, Precision, Shunt, 2.50V±0.5%	SC-70	16dk	RF1	3a	Max
ABQ	-	APL5102-32AI	LVR-IC	LDO, 3.2V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABQ	-	LM4040DIX3-2.5+T	Vref-IC	µPower, Precision, Shunt, 2.50V±1.0%	SC-70	16dk	RF1	3a	Max
ABR	-	APL5102-33AI	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABR	-	LM4040AIX3-3.0+T	Vref-IC	µPower, Precision, Shunt, 3.00V±0.1%	SC-70	16dk	RF1	3a	Max
ABs	-	BCW60B	Si-npn	GP, 32V, 200mA, 250mW, B=150..310, 250MHz	SOT-23	16ta	-	3c	Inf
ABS	-	APL5102-34AI	LVR-IC	LDO, 3.4V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABS	-	LM4040BIX3-3.0+T	Vref-IC	µPower, Precision, Shunt, 3.00V±0.2%	SC-70	16dk	RF1	3a	Max
ABt	-	BCW60B	Si-npn	GP, 32V, 200mA, 250mW, B=150..310, 250MHz	SOT-23	16ta	-	3a	PhM
ABT	-	APL5102-35AI	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-23	16cg	VR1	3b	Anp
ABT	-	LM4040CIX3-3.0+T	Vref-IC	µPower, Precision, Shunt, 3.00V±0.5%	SC-70	16dk	RF1	3a	Max
ABU	-	LM4040DIX3-3.0+T	Vref-IC	µPower, Precision, Shunt, 3.00V±1.0%	SC-70	16dk	RF1	3a	Max
ABV	-	LM4040AIX3-4.1+T	Vref-IC	µPower, Precision, Shunt, 4.096V±0.1%	SC-70	16dk	RF1	3a	Max
ABW	-	BCW60B	Si-npn	GP, 32V, 200mA, 250mW, B=150..310, 250MHz	SOT-23	16ta	-	3a	PhC
ABW	-	LM4040BIX3-4.1+T	Vref-IC	µPower, Precision, Shunt, 4.096V±0.2%	SC-70	16dk	RF1	3a	Max
ABX	-	LM4040CIX3-4.1+T	Vref-IC	µPower, Precision, Shunt, 4.096V±0.5%	SC-70	16dk	RF1	3a	Max
ABY	-	LM4040DIX3-4.1+T	Vref-IC	µPower, Precision, Shunt, 4.096V±1.0%	SC-70	16dk	RF1	3a	Max
ABZ	-	LM4040AIX3-5.0+T	Vref-IC	µPower, Precision, Shunt, 5.00V±0.1%	SC-70	16dk	RF1	3a	Max
aC	-	BU45K252G	Vdet-IC	2.5V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Ac	-	BD48K25G	Vdet-IC	2.5V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
AC	-	2SD1101C	Si-npn	GP, 25V, 700mA, 150mW, B=120..240	SC-59A	16ta	-	3a	Ren
AC	-	AP431IW	Vref-IC	Adjustable, Precision, Shunt, 2.495V±1%	SOT-23-3L	16rc	RF1	3b	Ana
AC	-	IMP809TEUR	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Imp
AC	-	KRA353	Si-pnp-Digi	Dual, Sw, 12V, 500mA, 100mW, R1/R2=4.7k/4.7k	USM	16ta	-	3f	Kec
AC	-	MMBZ5227B	Z-diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 350mW	SOT-23	16dc	-	3c	Jiy
AC	-	MT3S06S	Si-npn	VHF/UHF, 10V, 15mA, 10GHz	SOT-23	16ta	-	3a	Tos
AC	-	PT7M7809TT	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Pti
AC	-	RT9161-31CV	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AC	cb	MIC803-26D4VC3	Vdet-IC	2.63V±2.5%, -Reset ODO, 1120ms	SC-70	16vdc	VD7	3a	Mcr
AC	cb	MIC803-26D4VM3	Vdet-IC	2.63V±2.5%, -Reset ODO, 1120ms	SOT-23	16vdc	VD7	3a	Mcr
AC	cu	PT7M7809TTE	Vdet-IC	3.08V±1.5%, -Reset PPO, Lead free	SOT-23	16vdc	VD7	3b	Pti
AC-	-	RT9819B-28PU3	Vdet-IC	2.8V±1.5%, -Reset PPO, Td=55ms	SOT-323	16vdc	VD7	3a	Rct
AC1	-	CMUT3904	Si-npn	GP, 60V, 600mA, 250mW, B=100..100, 300MHz	SOT-523F	18ta	-	3a	Cen
AC1	-	FA4L4M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/47k	SC-59	16ta	-	3a	Nec
AC1	-	GA4L4M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/47k	SOT-323	16ta	-	3a	Nec
AC2	-	CMUT3906	Si-pnp	GP, 40V, 600mA, 250mW, B=100..100, 250MHz	SOT-523F	18ta	-	3a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AC3J	-	DTA123JL-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2.2k/47k	SOT-23	16ta	-	3a	Utc
AC3J	-	DTA123JL-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2.2k/47k	SOT-323	16ta	-	3a	Utc
AC3J	-	DTA123JL-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2.2k/47k	SOT-523	16ta	-	3a	Utc
AC3J	df	DTA123JG-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k, Halogen free	SOT-23	16ta	-	3a	Utc
AC3J	df	DTA123JG-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k, Halogen free	SOT-323	16ta	-	3a	Utc
AC3J	df	DTA123JG-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=2.2k/47k, Halogen free	SOT-523	16ta	-	3a	Utc
AC3Y	-	DTA123YL-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	Utc
AC3Y	df	DTA123YG-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k, Halogen free	SOT-23	16ta	-	3a	Utc
AC4E	-	DTA124EL-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SOT-23	16ta	-	3a	Utc
AC4E	-	DTA124EL-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SOT-323	16ta	-	3a	Utc
AC4E	-	DTA124EL-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=22k/22k	SOT-523	16ta	-	3a	Utc
AC4E	df	DTA124EG-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k, Halogen free	SOT-23	16ta	-	3a	Utc
AC4E	df	DTA124EG-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k, Halogen free	SOT-323	16ta	-	3a	Utc
AC4E	df	DTA124EG-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=22k/22k, Halogen free	SOT-523	16ta	-	3a	Utc
AC4T	-	DTA115TL-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1=100k	SOT-23	16ta	-	3a	Utc
AC4T	-	DTA124TL-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1=22k	SOT-23	16ta	-	3a	Utc
AC4T	df	DTA115TG-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=100k, Halogen free	SOT-23	16ta	-	3a	Utc
AC4T	df	DTA124TG-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=22k, Halogen free	SOT-23	16ta	-	3a	Utc
ACA	-	LM4040BIX3-5.0+T	Vref-IC	µPower, Precision, Shunt, 5.00V±0.2%	SC-70	16dk	RF1	3a	Max
ACAA	-	HWD809TEU	Vdet-IC	3.08V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Csm
ACAA	-	MAX809TUR	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
ACB	-	LM4040CIX3-5.0+T	Vref-IC	µPower, Precision, Shunt, 5.00V±0.5%	SC-70	16dk	RF1	3a	Max
ACC	-	LM4040DIX3-5.0+T	Vref-IC	µPower, Precision, Shunt, 5.00V±1.0%	SC-70	16dk	RF1	3a	Max
ACD	-	AME8800GEET	LVR-IC	LDO, 3.5V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
ACD	-	AME8800GEETL	LVR-IC	LDO, 3.5V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
ACD	-	MAX6808XR32-T	Vdet-IC	3.2V±1.5%, -Reset ODO	SOT-323	16vdb	VD6	3b	Max
ACD	cm	AME8800GEETY	LVR-IC	LDO, 3.5V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
ACD	cm	AME8800GEETZ	LVR-IC	LDO, 3.5V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
ACE	-	MAX6326_R31-T	Vdet-IC	3.1V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	Max
ACF	-	MAX6347XR46-T	Vdet-IC	4.6V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	Max
ACG	-	KTA1517-GR	Si-pnp	AF, LN, 120V, 100mA, 150mW, B=200..400, 100MHz	SOT-23	16ta	-	3f	Kec
ACH	-	MAX6326_R23-T	Vdet-IC	2.3V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	Max
ACI	-	MAX6326_R26-T	Vdet-IC	2.6V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	Max
ACJ	-	MAX6328XR26-T	Vdet-IC	2.6V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Max
ACK	-	MAX6346XR44-T	Vdet-IC	4.4V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	Max
ACL	-	2SC3837K-L	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=27..56, 1.5GHz	SOT-346	16ta	-	3a	Rhm
ACL	-	2SC4725-L	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=27..56, >1.5GHz	SC-75A	16ta	-	3a	Rhm
ACL	-	2SC5661-L	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=27..56, >1.5GHz	VMT3	18ta	-	3a	Rhm
ACL	-	KTA1517-BL	Si-pnp	AF, LN, 120V, 100mA, 150mW, B=350..700, 100MHz	SOT-23	16ta	-	3f	Kec
ACL	-	MAX6347XR44-T	Vdet-IC	4.4V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	Max
ACM	-	2SC3837K-M	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=39..82, 1.5GHz	SOT-346	16ta	-	3a	Rhm
ACM	-	2SC4725-M	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=39..82, >1.5GHz	SC-75A	16ta	-	3a	Rhm
ACM	-	2SC5661-M	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=39..82, >1.5GHz	VMT3	18ta	-	3a	Rhm
ACM	-	MAX6348XR46-T	Vdet-IC	4.6V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Max
ACN	-	2SC3837K-N	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=56..120, 1.5GHz	SOT-346	16ta	-	3a	Rhm
ACN	-	2SC4725-N	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=56..120, >1.5GHz	SC-75A	16ta	-	3a	Rhm
ACN	-	2SC5661-N	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=56..120, >1.5GHz	VMT3	18ta	-	3a	Rhm
ACN	-	MAX6348XR44-T	Vdet-IC	4.4V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Max
ACO	-	2SA1313-O	Si-pnp	GP, 80V, 500mA, 200mW, B=70..140, 200MHz	SOT-23	16ta	-	3a	Tos
ACO	-	MAX6346XR46-T	Vdet-IC	4.6V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	Max
ACp	-	BCW60C	Si-npn	GP, 32V, 200mA, 250mW, B=250..480, 250MHz	SOT-23	16ta	-	3a	PhH
ACP	-	2SC3837K-P	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=82..180, 1.5GHz	SOT-346	16ta	-	3a	Rhm
ACP	-	2SC4725-P	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=82..180, >1.5GHz	SC-75A	16ta	-	3a	Rhm
ACP	-	2SC5661-P	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=82..180, >1.5GHz	VMT3	18ta	-	3a	Rhm
ACP	-	MAX6326_R29-T	Vdet-IC	2.9V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	Max
ACQ	-	2SC3837K-Q	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=120..270, 1.5GHz	SOT-346	16ta	-	3a	Rhm
ACQ	-	2SC4725-Q	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=120..270, >1.5GHz	SC-75A	16ta	-	3a	Rhm
ACQ	-	2SC5661-Q	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=120..270, >1.5GHz	VMT3	18ta	-	3a	Rhm
ACQ	-	MAX6327XR23-T	Vdet-IC	2.3V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	Max
ACR	-	MAX6327XR26-T	Vdet-IC	2.6V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	Max
ACs	-	BCW60C	Si-npn	GP, 32V, 200mA, 250mW, B=250..480, 250MHz	SOT-23	16ta	-	3c	Inf
ACS	-	MAX6327XR29-T	Vdet-IC	2.9V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	Max
ACt	-	BCW60C	Si-npn	GP, 32V, 200mA, 250mW, B=250..480, 250MHz	SOT-23	16ta	-	3a	PhM
ACT	-	MAX6327XR31-T	Vdet-IC	3.1V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	Max
ACU	-	MAX6328XR23-T	Vdet-IC	2.3V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Max
ACV	-	MAX6328XR29-T	Vdet-IC	2.9V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Max
ACW	-	BCW60C	Si-npn	GP, 32V, 200mA, 250mW, B=250..480, 250MHz	SOT-23	16ta	-	3a	PhC
ACW	-	MAX6328XR31-T	Vdet-IC	3.1V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Max
ACX	-	MMBTA05	Si-npn	GP, 60V, 500mA, 350mW, B>100, >100MHz	SOT-323	16ta	-	3a	Kec
ACY	-	2SA1313-Y	Si-pnp	GP, 80V, 500mA, 200mW, B=120..240, 200MHz	SOT-23	16ta	-	3a	Tos

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
aD	-	BU45K262G	Vdet-IC	2.6V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Ad	-	BD48K26G	Vdet-IC	2.6V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
AD	-	12A02CH	Si-pnp	AF, GP, 15V, 1A, 700mW, B=300..700, 450MHz	CPH3	16ta	-	3a	San
AD	-	2SC3838K	Si-npn	HF, TV-Tun, 11V, 50mA, 200mW, 3.2GHz, B=120..270, Halogen free	SMT3	16ta	-	3a	Rhm
AD	-	2SC4726	Si-npn	HF, TV-Tun, 11V, 50mA, 200mW, 3.2GHz, B=120..270, Halogen free	EMT3	18ta	-	3a	Rhm
AD	-	2SC5662	Si-npn	HF, TV-Tun, 11V, 50mA, 200mW, 3.2GHz, B=120..270, Halogen free	VMT3	18ta	-	3a	Rhm
AD	-	AP431IAW	Vref-IC	Adjustable, Precision, Shunt, 2.495V±0.5%	SOT-23-3L	16rc	RF1	3b	Ana
AD	-	GS6333UR15D1	Vdet-IC	1.5V±1.8%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
AD	-	IMP809SEUR	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Imp
AD	-	KRA354	Si-pnp-Digi	Dual, Sw, 12V, 500mA, 100mW, R1/R2=10k/10k	USM	16ta	-	3f	Kec
AD	-	MMBZ5228B	Z-diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 350mW	SOT-23	16dc	-	3c	Jiy
AD	-	MT3S07S	Si-npn	VHF/UHF, 10V, 25mA, 12GHz	SOT-23	16ta	-	3a	Tos
AD	-	PT7M7809ST	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Pti
AD	-	RT9161-32CV	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AD	-	SiP6333R15D1	Vdet-IC	1.5V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
AD	cb	MIC803-29D2VC3	Vdet-IC	2.93V±2.5%, -Reset ODO, 20ms	SC-70	16vdc	VD7	3a	Mcr
AD	cb	MIC803-29D2VM3	Vdet-IC	2.93V±2.5%, -Reset ODO, 20ms	SOT-23	16vdc	VD7	3a	Mcr
AD	cu	PT7M7809STE	Vdet-IC	2.93V±1.5%, -Reset PPO, Lead free	SOT-23	16vdc	VD7	3b	Pti
-AD	-	PDTA123YT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxH
AD-	-	RT9818C-23PU3	Vdet-IC	2.3V±1.5%, -Reset ODO, Td=220ms	SOT-323	16vdc	VD6	3a	Rct
AD1	-	FA4L3M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/4k7	SC-59	16ta	-	3a	Nec
AD1	-	GA4L3M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/4k7	SOT-323	16ta	-	3a	Nec
ADAA	-	HWD809SEU	Vdet-IC	2.93V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Csm
ADAA	-	MAX809SUR	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
ADG	-	2SC3838G-x-AE3	Si-npn	HF, TV-Tun, 11V, 50mA, 200mW, 3.2GHz, B=120..270, Halogen free	SOT-23	16ta	-	3a	Utc
ADG	-	2SC3838G-x-AL3	Si-npn	HF, TV-Tun, 11V, 50mA, 200mW, 3.2GHz, B=120..270, Halogen free	SOT-323	16ta	-	3a	Utc
ADL	-	2SC3838K-L	Si-npn	VHF/UHF, 20V, 50mA, 200mW, B=27..56, 3.2GHz	SMT3	16ta	-	3a	Rhm
ADL	-	2SC3838L-x-AE3	Si-npn	HF, TV-Tun, 11V, 50mA, 200mW, 3.2GHz, B=120..270, Lead free	SOT-23	16ta	-	3a	Utc
ADL	-	2SC3838L-x-AL3	Si-npn	HF, TV-Tun, 11V, 50mA, 200mW, 3.2GHz, B=120..270, Lead free	SOT-323	16ta	-	3a	Utc
ADL	-	2SC4726-L	Si-npn	VHF/UHF, 20V, 50mA, 150mW, B=27..56, 3.2GHz	SC-75A	16ta	-	3a	Rhm
ADL	-	2SC5662-L	Si-npn	VHF/UHF, 20V, 50mA, 150mW, B=27..56, 3.2GHz	VMT3	16ta	-	3a	Rhm
ADM	-	2SC3838K-M	Si-npn	VHF/UHF, 20V, 50mA, 200mW, B=39..82, 3.2GHz	SMT3	16ta	-	3a	Rhm
ADM	-	2SC4726-M	Si-npn	VHF/UHF, 20V, 50mA, 150mW, B=39..82, 3.2GHz	SC-75A	16ta	-	3a	Rhm
ADM	-	2SC5662-M	Si-npn	VHF/UHF, 20V, 50mA, 150mW, B=39..82, 3.2GHz	VMT3	16ta	-	3a	Rhm
ADN	-	2SC3838K-N	Si-npn	VHF/UHF, 20V, 50mA, 200mW, B=56..120, 3.2GHz	SMT3	16ta	-	3a	Rhm
ADN	-	2SC4726-N	Si-npn	VHF/UHF, 20V, 50mA, 150mW, B=56..120, 3.2GHz	SC-75A	16ta	-	3a	Rhm
ADN	-	2SC5662-N	Si-npn	VHF/UHF, 20V, 50mA, 150mW, B=56..120, 3.2GHz	VMT3	16ta	-	3a	Rhm
ADp	-	BCW60D	Si-npn	GP, 32V, 200mA, 250mW, B=380..630, 250MHz	SOT-23	16ta	-	3a	PhH
ADP	-	2SC3838K-P	Si-npn	VHF/UHF, 20V, 50mA, 200mW, B=82..180, 3.2GHz	SMT3	16ta	-	3a	Rhm
ADP	-	2SC4726-P	Si-npn	VHF/UHF, 20V, 50mA, 150mW, B=82..180, 3.2GHz	SC-75A	16ta	-	3a	Rhm
ADP	-	2SC5662-P	Si-npn	VHF/UHF, 20V, 50mA, 150mW, B=82..180, 3.2GHz	VMT3	16ta	-	3a	Rhm
ADQ	-	2SC3838K-Q	Si-npn	VHF/UHF, 20V, 50mA, 200mW, B=120..270, 3.2GHz	SMT3	16ta	-	3a	Rhm
ADQ	-	2SC4726-Q	Si-npn	VHF/UHF, 20V, 50mA, 1500mW, B=120..270, 3.2GHz	SC-75A	16ta	-	3a	Rhm
ADQ	-	2SC5662-Q	Si-npn	VHF/UHF, 20V, 50mA, 1500mW, B=120..270, 3.2GHz	VMT3	16ta	-	3a	Rhm
ADs	-	BCW60D	Si-npn	GP, 32V, 200mA, 250mW, B=380..630, 250MHz	SOT-23	16ta	-	3c	Inf
ADt	-	BCW60D	Si-npn	GP, 32V, 200mA, 250mW, B=380..630, 250MHz	SOT-23	16ta	-	3a	PhM
ADW	-	BCW60D	Si-npn	GP, 32V, 200mA, 250mW, B=380..630, 250MHz	SOT-23	16ta	-	3a	PhC
ADX	-	MMBTA06	Si-npn	GP, 80V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	Kec
aE	-	BU45K272G	Vdet-IC	2.7V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Ae	-	BD48K27G	Vdet-IC	2.7V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
AE	-	2SA1365-E	Si-pnp	Relay-Drv, 25V, 1A, 150mW, B=150..300, 180MHz	SOT-23	16ta	-	3a	Mit
AE	-	AP431IR	Vref-IC	Adjustable, Precision, Shunt, 2.495V±1%	SOT-23-3L	16rd	RF1	3b	Ana
AE	-	BCW60E	Si-npn	GP, 32V, 200mA, 0.33W, B=250..460, 250MHz	SOT-23	16ta	-	3a	Fer
AE	-	CPH3105	Si-pnp	Relay-Drv, 50V, 3A, 900mW, B=200..560, 360MHz	CPH3	16ta	-	3a	San
AE	-	GS6333UR15D2	Vdet-IC	1.5V±1.8%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
AE	-	KRA355	Si-pnp-Digi	Dual, Sw, 12V, 500mA, 100mW, R1/R2=0.47k/10k	USM	16ta	-	3f	Kec
AE	-	MMBZ5229B	Z-diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 350mW	SOT-23	16dc	-	3c	Jiy
AE	-	MT3S04AS	Si-npn	VHF/UHF, 10V, 40mA, 7GHz	SOT-23	16ta	-	3a	Tos
AE	-	PT7M7809RT	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Pti
AE	-	RT9161-34CV	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AE	-	SiP6333R15D2	Vdet-IC	1.5V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
AE	cb	MIC803-29D3VC3	Vdet-IC	2.93V±2.5%, -Reset ODO, 140ms	SC-70	16vdc	VD7	3a	Mcr
AE	cb	MIC803-29D3VM3	Vdet-IC	2.93V±2.5%, -Reset ODO, 140ms	SOT-23	16vdc	VD7	3a	Mcr
AE	cu	PT7M7809RTE	Vdet-IC	2.63V±1.5%, -Reset PPO, Lead free	SOT-23	16vdc	VD7	3b	Pti
AE-	-	RT9819B-14PU3	Vdet-IC	1.4V±1.5%, -Reset PPO, Td=55ms	SOT-323	16vdc	VD7	3a	Rct
AE1	-	FA4L3N	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/10k	SC-59	16ta	-	3a	Nec
AE1	-	GA4L3N	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/10k	SOT-323	16ta	-	3a	Nec
AE3E	-	DTA143EL-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3a	Utc
AE3E	-	DTA143EL-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3a	Utc
AE3E	-	DTA143EL-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4.7k/4.7k	SOT-523	16ta	-	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AE3E	df	DTA143EG-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k, Halogen free	SOT-23	16ta	-	3a	Utc
AE3E	df	DTA143EG-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k, Halogen free	SOT-323	16ta	-	3a	Utc
AE3E	df	DTA143EG-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=4.7k/4.7k, Halogen free	SOT-523	16ta	-	3a	Utc
AE3T	-	DTA143TL-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4.7k	SOT-23	16ta	-	3a	Utc
AE3T	-	DTA143TL-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4.7k	SOT-323	16ta	-	3a	Utc
AE3T	-	DTA143TL-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=4.7k	SOT-523	16ta	-	3a	Utc
AE3T	df	DTA143TG-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=4.7k, Halogen free	SOT-23	16ta	-	3a	Utc
AE3T	df	DTA143TG-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=4.7k, Halogen free	SOT-323	16ta	-	3a	Utc
AE3T	df	DTA143TG-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1=4.7k, Halogen free	SOT-523	16ta	-	3a	Utc
AE3X	-	DTA143XL-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4.7k/10k	SOT-23	16ta	-	3a	Utc
AE3X	-	DTA143XL-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4.7k/10k	SOT-323	16ta	-	3a	Utc
AE3X	-	DTA143XL-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4.7k/10k	SOT-523	16ta	-	3a	Utc
AE3X	df	DTA143XG-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k, Halogen free	SOT-23	16ta	-	3a	Utc
AE3X	df	DTA143XG-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k, Halogen free	SOT-323	16ta	-	3a	Utc
AE3X	df	DTA143XG-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=4.7k/10k, Halogen free	SOT-523	16ta	-	3a	Utc
AE3Z	-	DTA143ZL-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3a	Utc
AE3Z	-	DTA143ZL-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3a	Utc
AE3Z	-	DTA143ZL-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4.7k/4.7k	SOT-523	16ta	-	3a	Utc
AE3Z	df	DTA143ZG-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k, Halogen free	SOT-23	16ta	-	3a	Utc
AE3Z	df	DTA143ZG-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k, Halogen free	SOT-323	16ta	-	3a	Utc
AE3Z	df	DTA143ZG-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=4.7k/4.7k, Halogen free	SOT-523	16ta	-	3a	Utc
AE4E	-	DTA144EL-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	SOT-23	16ta	-	3a	Utc
AE4E	-	DTA144EL-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	SOT-323	16ta	-	3a	Utc
AE4E	-	DTA144EL-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=47k/47k	SOT-523	16ta	-	3a	Utc
AE4E	df	DTA144EG-AE3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/47k, Halogen free	SOT-23	16ta	-	3a	Utc
AE4E	df	DTA144EG-AL3	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/47k, Halogen free	SOT-323	16ta	-	3a	Utc
AE4E	df	DTA144EG-AN3	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=47k/47k, Halogen free	SOT-523	16ta	-	3a	Utc
AED	-	AME8800HEET	LVR-IC	LDO, 2.7V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AED	-	AME8800HEETL	LVR-IC	LDO, 2.7V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AED	cm	AME8800HEETY	LVR-IC	LDO, 2.7V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AED	cm	AME8800HEETZ	LVR-IC	LDO, 2.7V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AEG	-	2SA1362-GR	Si-pnp	Sw, AF-Amp, 15V, 800mA, 200mW, B=200..400, 120MHz	SOT-23	16ta	-	3a	Tos
AEK	-	MXD1810XR46	Vdet-IC	4.6V±2.5%, -Reset PPO	SOT-323	16vdy	VD7	3a	Max
AEL	-	2SA1362-BL	Si-pnp	Sw, AF-Amp, 15V, 800mA, 200mW, B=70..140, 120MHz	SOT-23	16ta	-	3a	Tos
AEL	-	2SC3839K-L	Si-npn	AF, 30V, 50mA, 150mW, B=27..56, >200MHz	SOT-346	16ta	-	3a	Rhm
AEL	-	AME8800IEET	LVR-IC	LDO, 3.4V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AEL	-	AME8800IEETL	LVR-IC	LDO, 3.4V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AEL	-	MXD1811XR44	Vdet-IC	4.4V±2.5%, CMOS -Reset ODO	SOT-323	16vdy	VD9	3a	Max
AEL	cm	AME8800IEETY	LVR-IC	LDO, 3.4V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AEL	cm	AME8800IEETZ	LVR-IC	LDO, 3.4V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AEM	-	2SC3839K-M	Si-npn	AF, 30V, 50mA, 150mW, B=39..82, >200MHz	SOT-346	16ta	-	3a	Rhm
AEM	-	MXD1812XR41	Vdet-IC	4.1V±2.5%, CMOS +PPO +Reset	SOT-323	16vdy	VD7	3a	Max
AEN	-	2SC3839K-N	Si-npn	AF, 30V, 50mA, 150mW, B=56..120, >200MHz	SOT-346	16ta	-	3a	Rhm
AEN	-	MXD1813XR46	Vdet-IC	4.6V±2.5%, MR, CMOS -Reset ODO	SOT-323	16vdy	VD10	3a	Max
AEO	-	MXD1815XR29	Vdet-IC	2.9V±2.5%, -Reset PPO	SOT-323	16vdy	VD7	3a	Max
AEP	-	2SC3839K-P	Si-npn	AF, 30V, 50mA, 150mW, B=82..180, >200MHz	SOT-346	16ta	-	3a	Rhm
AEP	-	MXD1816XR22	Vdet-IC	2.2V±2.5%, CMOS -Reset ODO	SOT-323	16vdy	VD9	3a	Max
AEQ	-	2SC3839K-Q	Si-npn	AF, 30V, 50mA, 150mW, B=120..270, >200MHz	SOT-346	16ta	-	3a	Rhm
AEQ	-	MXD1817XR31	Vdet-IC	3.1V±2.5%, CMOS +Reset PPO	SOT-323	16vdy	VD7	3a	Max
AER	-	MXD1818XR26	Vdet-IC	2.6V±2.5%, MR, CMOS +Reset ODO	SOT-323	16vdy	VD10	3a	Max
AEV	-	MXD1818XR22	Vdet-IC	2.2V±2.5%, MR, CMOS +Reset ODO	SOT-323	16vdy	VD10	3a	Max
AEW	-	MAX6138AEXR12-T	Vref-IC	Shunt, 1.2205V±0.1%	SC-70	16dk	RF1	3a	Max
AEX	-	MAX6138BEXR12-T	Vref-IC	Shunt, 1.2205V±0.2%	SC-70	16dk	RF1	3a	Max
AEY	-	2SA1362-Y	Si-pnp	Sw, AF-Amp, 15V, 800mA, 200mW, B=120..240, 120MHz	SOT-23	16ta	-	3a	Tos
AEY	-	MAX6138CEXR12-T	Vref-IC	Shunt, 1.2205V±0.5%	SC-70	16dk	RF1	3a	Max
aF	-	BU45K282G	Vdet-IC	2.8V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Af	-	BD48K28G	Vdet-IC	2.8V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
AF	-	2SA1365-F	Si-pnp	Relay-Drv, 25V, 1A, 150mW, B=250..500, 180MHz	SOT-23	16ta	-	3a	Mit
AF	-	AP431IAR	Vref-IC	Adjustable, Precision, Shunt, 2.495V±0.5%	SOT-23-3L	16rd	RF1	3b	Ana
AF	-	CPH3106	Si-pnp	DC/DC-Conv, 15V, 3A, 900mW, 280MHz, B=200..560	CPH3	16ta	-	3a	San
AF	-	IMP809REUR	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Imp
AF	-	KRA356	Si-pnp-Digi	Dual, Sw, 12V, 500mA, 100mW, R1/R2=1k/10k	USM	16ta	-	3f	Kec
AF	-	MMBZ5230B	Z-diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 350mW	SOT-23	16dc	-	3c	Jiy
AF	-	PT7M7809ZT	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Pti
AF	cu	PT7M7809ZTE	Vdet-IC	2.32V±1.5%, -Reset PPO, Lead free	SOT-23	16vdc	VD7	3b	Pti
AF-	-	RT9819D-20PU3	Vdet-IC	2.0V±1.5%, -Reset PPO, Td=450ms	SOT-23	16vdc	VD7	3a	Rct
AF1	-	FA4L3Z	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=4k7	SC-59	16ta	-	3a	Nec
AF1	-	GA4L3Z	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=4k7	SOT-323	16ta	-	3a	Nec
AFA	-	MAX6138AEXR21-T	Vref-IC	Shunt, 2.048V±0.1%	SC-70	16dk	RF1	3a	Max
AFAA	-	HWD809REU	Vdet-IC	2.63V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Csm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AFAA	-	MAX809RUR	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
AFB	-	MAX6138BEXR21-T	Vref-IC	Shunt, 2.048V±0.2%	SC-70	16dk	RF1	3a	Max
AFC	-	MAX6138CEXR21-T	Vref-IC	Shunt, 2.048V±0.5%	SC-70	16dk	RF1	3a	Max
AFE	-	MAX6138AEXR25-T	Vref-IC	Shunt, 2.50V±0.1%	SC-70	16dk	RF1	3a	Max
AFF	-	MAX6138BEXR25-T	Vref-IC	Shunt, 2.50V±0.2%	SC-70	16dk	RF1	3a	Max
AFG	-	MAX6138CEXR25-T	Vref-IC	Shunt, 2.50V±0.5%	SC-70	16dk	RF1	3a	Max
AFI	-	MAX6138AEXR30-T	Vref-IC	Shunt, 3.00V±0.1%	SC-70	16dk	RF1	3a	Max
AFJ	-	MAX6138BEXR30-T	Vref-IC	Shunt, 3.00V±0.2%	SC-70	16dk	RF1	3a	Max
AFK	-	MAX6138CEXR30-T	Vref-IC	Shunt, 3.00V±0.5%	SC-70	16dk	RF1	3a	Max
AFM	-	MAX6138AEXR41-T	Vref-IC	Shunt, 4.096V±0.1%	SC-70	16dk	RF1	3a	Max
AFN	-	MAX6138BEXR41-T	Vref-IC	Shunt, 4.096V±0.2%	SC-70	16dk	RF1	3a	Max
AFO	-	MAX6138CEXR41-T	Vref-IC	Shunt, 4.096V±0.5%	SC-70	16dk	RF1	3a	Max
AFP	-	2SD1781K-P	Si-npn	AF-Drv, 40V, 800mA, 200mW, B=82..180, >150MHz	SOT-346	16ta	-	3a	Rhm
AFQ	-	2SD1781K-Q	Si-npn	AF-Drv, 40V, 800mA, 200mW, B=120..270, >150MHz	SOT-346	16ta	-	3a	Rhm
AFQ	-	MAX6138AEXR50-T	Vref-IC	Shunt, 5.000V±0.1%	SC-70	16dk	RF1	3a	Max
AFR	-	2SD1781K-R	Si-npn	AF-Drv, 40V, 800mA, 200mW, B=180..390, >150MHz	SOT-346	16ta	-	3a	Rhm
AFR	-	MAX6138BEXR50-T	Vref-IC	Shunt, 5.000V±0.2%	SC-70	16dk	RF1	3a	Max
AFs	-	BCW60FF	Si-npn	GP, 32V, 200mA, 330mW, B=250..460, 250MHz	SOT-23	16ta	-	3c	Inf
AFS	-	MAX6138CEXR50-T	Vref-IC	Shunt, 5.000V±0.5%	SC-70	16dk	RF1	3a	Max
aG	-	BU45K292G	Vdet-IC	2.9V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Ag	-	BD48K29G	Vdet-IC	2.9V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
AG	-	2SA1365-G	Si-pnp	Relay-Drv, 25V, 1A, 150mW, B=400..800, 180MHz	SOT-23	16ta	-	3a	Mit
AG	-	2SA1980EF-G	Si-pnp	GP, 50V, 150mA, 150mW, B=200..400, 80MHz	SOT-523F	18ta	-	3a	Auk
AG	-	2SA1980E-G	Si-pnp	GP, 50V, 150mA, 150mW, B=200..400, 80MHz	SOT-523	16ta	-	3a	Auk
AG	-	CPH3107	Si-pnp	DC/DC-Conv, 15V, 6A, 900mW, 140MHz, B=200..560	CPH3	16ta	-	3a	San
AG	-	GS6333UR15D3	Vdet-IC	1.5V±1.8%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
AG	-	IMP810LEUR	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Imp
AG	-	KRA357	Si-pnp-Digi	Dual, Sw, 12V, 500mA, 100mW, R1/R2=2.2k/10k	USM	16ta	-	3f	Kec
AG	-	PT7M7809YT	Vdet-IC	2.20V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Pti
AG	-	RT9161-36CV	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AG	-	SiP6333R15D3	Vdet-IC	1.5V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
AG	cb	MIC803-31D2VC3	Vdet-IC	3.08V±2.5%, -Reset ODO, 20ms	SC-70	16vdc	VD7	3a	Mcr
AG	cb	MIC803-31D2VM3	Vdet-IC	3.08V±2.5%, -Reset ODO, 20ms	SOT-23	16vdc	VD7	3a	Mcr
AG	cu	PT7M7809YTE	Vdet-IC	2.20V±1.5%, -Reset PPO, Lead free	SOT-23	16vdc	VD7	3b	Pti
-AG	-	PDTA144VT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/10k	SOT-23	16ta	-	3a	NxH
AG-	-	RT9818C-16PU3	Vdet-IC	1.6V±1.5%, -Reset ODO, Td=220ms	SOT-323	16vdc	VD6	3a	Rct
AG1	-	FA4A3Q	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=1k/10k	SC-59	16ta	-	3a	Nec
AG1	-	GA4A3Q	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=1k/10k	SOT-323	16ta	-	3a	Nec
AGAA	-	HWD810LEU	Vdet-IC	4.63V±2%, +Reset PPO	SOT-23	16vdc	VD7	3a	Csm
AGAA	-	MAX810LUR	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
AGN	-	AME8800JEET	LVR-IC	LDO, 2.85V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AGN	-	AME8800JEETL	LVR-IC	LDO, 2.85V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AGN	cm	AME8800JEETY	LVR-IC	LDO, 2.85V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AGN	cm	AME8800JEETZ	LVR-IC	LDO, 2.85V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AGp	-	BCX70G	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=120..220, >100MHz	SOT-23	16ta	-	3a	PhH
AGs	-	BCW70G	Si-pnp	GP, 45V, 100mA, 200mW, B=120..220, >150MHz	SOT-23	16ta	-	3c	Inf
AGs	-	BCX70G	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=120..220, >100MHz	SOT-23	16ta	-	3a	Sie
AGt	-	BCX70G	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=120..220, >100MHz	SOT-23	16ta	-	3a	PhM
AGW	-	AME8500AEETAD26	Vdet-IC	2.63V±1.5%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3b	Ame
AGW	-	BCX70G	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=120..220, >100MHz	SOT-23	16ta	-	3a	PhC
AGW	cm	AME8500AEETAD26Z	Vdet-IC	2.63V±1.5%, -Reset PPO, 30ms, lead free	SOT-23	16vdc	VD7	3b	Ame
aH	-	BU45K302G	Vdet-IC	3.0V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Ah	-	BD48K30G	Vdet-IC	3.0V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
AH	-	1SS345	Si-diode	SBD, UHF-det/mix, 55V, 10mA, 150mW, 0.45pF	CP	16dc	-	3a	San
AH	-	GS6333UR16D1	Vdet-IC	1.6V±1.8%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
AH	-	IMP810MEUR	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Imp
AH	-	MMBZ5231B	Z-diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 350mW	SOT-23	16dc	-	3c	Jiy
AH	-	PT7M7810LT	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Pti
AH	-	RT9161-37CV	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AH	-	SB01W05C	Si-diode	Dual, SBR, HF, 50V, 100mA, Vf<0.55V(100mA), 4.4pF, 10ns	CP	16dg	-	3a	San
AH	-	SiP6333R16D1	Vdet-IC	1.6V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
AH	cu	PT7M7810LTE	Vdet-IC	4.63V±1.5%, +Reset PPO, Lead free	SOT-23	16vdc	VD7	3b	Pti
AH-	-	RT9819C-28PU3	Vdet-IC	2.8V±1.5%, -Reset PPO, Td=220ms	SOT-323	16vdc	VD7	3a	Rct
AH1	-	FA4A4P	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/47k	SC-59	16ta	-	3a	Nec
AH1	-	GA4A4P	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/47k	SOT-323	16ta	-	3a	Nec
AHAA	-	HWD810MEU	Vdet-IC	4.38V±2%, +Reset PPO	SOT-23	16vdc	VD7	3a	Csm
AHAA	-	MAX810MUR	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
AHp	-	BCX70H	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=180..310, >100MHz	SOT-23	16ta	-	3a	PhH
AHP	-	2SB1197K-P	Si-pnp	AF, 40V, 800mA, 200mW, B=82..180, 200MHz	SOT-23	16ta	-	3a	Rhm
AHP	-	AME8800KEET	LVR-IC	LDO, 3.7V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AHP	-	AME8800KEETL	LVR-IC	LDO, 3.7V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AHP	cm	AME8800KEETY	LVR-IC	LDO, 3.7V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AHP	cm	AME8800KEETZ	LVR-IC	LDO, 3.7V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AHQ	-	2SB1197K-Q	Si-pnp	AF, 40V, 800mA, 200mW, B=120..270, 200MHz	SOT-23	16ta	-	3a	Rhm
AHR	-	2SB1197K-R	Si-pnp	AF, 40V, 800mA, 200mW, B=180..390, 200MHz	SOT-23	16ta	-	3a	Rhm
AHs	-	BCW70H	Si-pnp	GP, 45V, 100mA, 200mW, B=180..310, >150MHz	SOT-23	16ta	-	3c	Inf
AHs	-	BCX70H	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=180..310, >100MHz	SOT-23	16ta	-	3a	Sie
AHt	-	BCX70H	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=180..310, >100MHz	SOT-23	16ta	-	3a	PhM
AHT	-	MXD1810XR41	Vdet-IC	4.1V±2.5%, -Reset PPO	SOT-323	16vdy	VD7	3a	Max
AHU	-	MXD1810XR44	Vdet-IC	4.4V±2.5%, -Reset PPO	SOT-323	16vdy	VD7	3a	Max
AHV	-	MXD1811XR41	Vdet-IC	4.1V±2.5%, CMOS -Reset ODO	SOT-323	16vdy	VD9	3a	Max
AHW	-	BCX70H	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=180..310, >100MHz	SOT-23	16ta	-	3a	PhC
AHW	-	MXD1811XR46	Vdet-IC	4.6V±2.5%, CMOS -Reset ODO	SOT-323	16vdy	VD9	3a	Max
AHX	-	MXD1812XR44	Vdet-IC	4.4V±2.5%, CMOS +PPO +Reset	SOT-323	16vdy	VD7	3a	Max
AHY	-	MXD1812XR46	Vdet-IC	4.6V±2.5%, CMOS +PPO +Reset	SOT-323	16vdy	VD7	3a	Max
AHZ	-	MXD1813XR41	Vdet-IC	4.1V±2.5%, MR, CMOS -Reset ODO	SOT-323	16vdy	VD10	3a	Max
AI	-	GS6333UR16D2	Vdet-IC	1.6V±1.8%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
AI	-	IMP810JEUR	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Imp
AI	-	PT7M7810MT	Vdet-IC	4.26V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Pti
AI	-	SiP6333R16D2	Vdet-IC	1.6V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
AI	cu	PT7M7810MTE	Vdet-IC	4.26V±1.5%, +Reset PPO, Lead free	SOT-23	16vdc	VD7	3b	Pti
AIA	-	MXD1813XR44	Vdet-IC	4.4V±2.5%, MR, CMOS -Reset ODO	SOT-323	16vdy	VD10	3a	Max
AIB	-	MXD1815XR22	Vdet-IC	2.2V±2.5%, -Reset PPO	SOT-323	16vdy	VD7	3a	Max
AIC	-	MXD1815XR23	Vdet-IC	2.3V±2.5%, -Reset PPO	SOT-323	16vdy	VD7	3a	Max
AID	-	MXD1815XR26	Vdet-IC	2.6V±2.5%, -Reset PPO	SOT-323	16vdy	VD7	3a	Max
AIE	-	MXD1815XR31	Vdet-IC	3.1V±2.5%, -Reset PPO	SOT-323	16vdy	VD7	3a	Max
AIF	-	MXD1816XR23	Vdet-IC	2.3V±2.5%, CMOS -Reset ODO	SOT-323	16vdy	VD9	3a	Max
AIG	-	MXD1816XR26	Vdet-IC	2.6V±2.5%, CMOS -Reset ODO	SOT-323	16vdy	VD9	3a	Max
AIH	-	MXD1816XR29	Vdet-IC	2.9V±2.5%, CMOS -Reset ODO	SOT-323	16vdy	VD9	3a	Max
AII	-	MXD1816XR31	Vdet-IC	3.1V±2.5%, CMOS -Reset ODO	SOT-323	16vdy	VD9	3a	Max
AIJ	-	MXD1817XR22	Vdet-IC	2.2V±2.5%, CMOS +Reset PPO	SOT-323	16vdy	VD7	3a	Max
AIK	-	MXD1817XR23	Vdet-IC	2.3V±2.5%, CMOS +Reset PPO	SOT-323	16vdy	VD7	3a	Max
AIL	-	MXD1817XR26	Vdet-IC	2.6V±2.5%, CMOS +Reset PPO	SOT-323	16vdy	VD7	3a	Max
AIM	-	MXD1817XR29	Vdet-IC	2.9V±2.5%, CMOS +Reset PPO	SOT-323	16vdy	VD7	3a	Max
AIN	-	MXD1818XR23	Vdet-IC	2.3V±2.5%, MR, CMOS +Reset ODO	SOT-323	16vdy	VD10	3a	Max
AIO	-	MXD1818XR29	Vdet-IC	2.9V±2.5%, MR, CMOS +Reset ODO	SOT-323	16vdy	VD10	3a	Max
AIP	-	MXD1818XR31	Vdet-IC	3.1V±2.5%, MR, CMOS +Reset ODO	SOT-323	16vdy	VD10	3a	Max
AJ	-	ADM810JART	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ad
AJ	-	CPH3109	Si-pnp	DC/DC-Conv, 30V, 3A, 900mW, 380MHz, B=200..560	CPH3	16ta	-	3a	San
AJ	-	IMP810TEUR	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Imp
AJ	-	MMBZ5232B	Z-diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 350mW	SOT-23	16dc	-	3c	Jiy
AJ	-	PT7M7810TT	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Pti
AJ	-	RT9161-38CV	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AJ	cb	MIC803-31D4VC3	Vdet-IC	3.08V±2.5%, -Reset ODO, 1120ms	SC-70	16vdc	VD7	3a	Mcr
AJ	cb	MIC803-31D4VM3	Vdet-IC	3.08V±2.5%, -Reset ODO, 1120ms	SOT-23	16vdc	VD7	3a	Mcr
AJ	cu	PT7M7810TTE	Vdet-IC	3.08V±1.5%, +Reset PPO, Lead free	SOT-23	16vdc	VD7	3b	Pti
AJ-	-	RT9818B-18PU3	Vdet-IC	1.8V±1.5%, -Reset ODO, Td=55ms	SOT-323	16vdc	VD6	3a	Rct
AJ=	-	RT9818B-18GU3	Vdet-IC	1.8V±1.5%, -Reset ODO, Td=55ms	SOT-323	16vdc	VD6	3a	Rct
AJ1	-	FA4F4N	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/47k	SC-59	16ta	-	3a	Nec
AJ1	-	GA4F4N	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/47k	SOT-323	16ta	-	3a	Nec
AJ5	-	2SK443-5	n-FET	V-cam amp, 15V, 50mA, 200mW, Idss=5..12mA	SOT-23	16fa	-	3a	San
AJ6	-	2SK443-6	n-FET	V-cam amp, 15V, 50mA, 200mW, Idss=10..24mA	SOT-23	16fa	-	3a	San
AJ7	-	2SK443-7	n-FET	V-cam amp, 15V, 50mA, 200mW, Idss=16..38mA	SOT-23	16fa	-	3a	San
AJAA	-	HWD810TEU	Vdet-IC	3.08V±2%, +Reset PPO	SOT-23	16vdc	VD7	3a	Csm
AJAA	-	MAX810TUR	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
AJp	-	BCX70J	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=250..460, >100MHz	SOT-23	16ta	-	3a	PhH
AJP	-	2SD1782K-P	Si-npn	AF-Drv, 80V, 500mA, 200mW, B=82..180, >180MHz	SOT-346	16ta	-	3a	Rhm
AJQ	-	2SD1782K-Q	Si-npn	AF-Drv, 80V, 500mA, 200mW, B=120..270, >180MHz	SOT-346	16ta	-	3a	Rhm
AJR	-	2SD1782K-R	Si-npn	AF-Drv, 80V, 500mA, 200mW, B=180..390, >180MHz	SOT-346	16ta	-	3a	Rhm
AJs	-	BCW70J	Si-pnp	GP, 45V, 100mA, 200mW, B=250..460, >150MHz	SOT-23	16ta	-	3c	Inf
AJs	-	BCX70J	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=250..460, >100MHz	SOT-23	16ta	-	3a	Sie
AJt	-	BCX70J	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=250..460, >100MHz	SOT-23	16ta	-	3a	PhM
AJW	-	AME8800LEET	LVR-IC	LDO, 1.5V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AJW	-	AME8800LEETL	LVR-IC	LDO, 1.5V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AJW	-	BCX70J	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=250..460, >100MHz	SOT-23	16ta	-	3a	PhC
AJW	cm	AME8800LEETY	LVR-IC	LDO, 1.5V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AJW	cm	AME8800LEETZ	LVR-IC	LDO, 1.5V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AJX	-	AME8800MEET	LVR-IC	LDO, 1.8V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AJX	-	AME8800MEETL	LVR-IC	LDO, 1.8V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AJX	cm	AME8800MEETY	LVR-IC	LDO, 1.8V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AJX	cm	AME8800MEETZ	LVR-IC	LDO, 1.8V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
aK	-	BU45K312G	Vdet-IC	3.1V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Ak	-	BD48K31G	Vdet-IC	3.1V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
AK	-	12A02MH	Si-pnp	AF, GP, 15V, 1A, 600mW, B=300..700, 450MHz	MCPH3	18ta	-	3a	San
AK	-	2SK2539	n-FET	FM/VHF, 15V, Idss=10..50mA, Up<3V	SOT-23	16fa	-	3a	San
AK	-	CPH3110	Si-pnp	DC/DC-Conv, 30V, 5A, 900mW, 250MHz, B=200..560	CPH3	16ta	-	3a	San
AK	-	GS6333UR16D3	Vdet-IC	1.6V±1.8%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
AK	-	IMP810SEUR	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Imp
AK	-	MMBZ5233B	Z-diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 350mW	SOT-23	16dc	-	3c	Jiy
AK	-	PT7M7810ST	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Pti
AK	-	RT9161-39CV	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AK	-	SiP6333R16D3	Vdet-IC	1.6V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
AK	cb	MIC803-41D2VC3	Vdet-IC	4.10V±2.5%, -Reset ODO, 20ms	SC-70	16vdc	VD7	3a	Mcr
AK	cb	MIC803-41D2VM3	Vdet-IC	4.10V±2.5%, -Reset ODO, 20ms	SOT-23	16vdc	VD7	3a	Mcr
AK	cu	PT7M7810STE	Vdet-IC	2.93V±1.5%, +Reset PPO, Lead free	SOT-23	16vdc	VD7	3b	Pti
-AK	-	PDTC115TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=100k	SOT-23	16ta	-	3a	NxH
AK-	-	RT9818E-18PU3	Vdet-IC	1.8V±1.5%, +Reset ODO	SOT-323	16vdc	VD6	3a	Rct
AK1	-	FA4L4L	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/22k	SC-59	16ta	-	3a	Nec
AK1	-	GA4L4L	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/22k	SOT-323	16ta	-	3a	Nec
AK6	-	2SK2539-6	n-FET	HF, Sw, 15V, 50mA, 200mW, Idss=10..20mA	SOT-23	16fa	-	3a	San
AK7	-	2SK2539-7	n-FET	HF, Sw, 15V, 50mA, 200mW, Idss=16..32mA	SOT-23	16fa	-	3a	San
AK8	-	2SK2539-8	n-FET	HF, Sw, 15V, 50mA, 200mW, Idss=25..50mA	SOT-23	16fa	-	3a	San
AKAA	-	HWD810SEU	Vdet-IC	2.93V±2%, +Reset PPO	SOT-23	16vdc	VD7	3a	Csm
AKAA	-	MAX810SUR	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
AKG	-	AME8800NEET	LVR-IC	LDO, 2.9V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AKG	-	AME8800NEETL	LVR-IC	LDO, 2.9V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AKG	cm	AME8800NEETY	LVR-IC	LDO, 2.9V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AKG	cm	AME8800NEETZ	LVR-IC	LDO, 2.9V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AKH	-	AME8800OEET	LVR-IC	LDO, 3.1V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AKH	-	AME8800OEETL	LVR-IC	LDO, 3.1V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AKH	cm	AME8800OEETY	LVR-IC	LDO, 3.1V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AKH	cm	AME8800OEETZ	LVR-IC	LDO, 3.1V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AKp	-	BCX70K	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=380..630, >100MHz	SOT-23	16ta	-	3a	PhH
AKP	-	2SB1198K-P	Si-pnp	AF-Drv, 80V, 500mA, 200mW, B=82..180, >180MHz	SOT-346	16ta	-	3a	Rhm
AKQ	-	2SA1738-Q	Si-pnp	Sw, Hi-speed, 15V, 50mA, 200mW, B=50..120, 1.5GHz	SC-59	16ta	-	3a	Pan
AKQ	-	2SA1806-Q	Si-pnp	Sw, 15V, 100mA, 125mW, 1.5GHz, B=50..120	SOT-416	16ta	-	3a	Pan
AKQ	-	2SB1198K-Q	Si-pnp	AF-Drv, 80V, 500mA, 200mW, B=120..270, >180MHz	SOT-346	16ta	-	3a	Rhm
AKR	-	2SA1738-R	Si-pnp	Sw, Hi-speed, 15V, 50mA, 200mW, B=90..150, 1.5GHz	SC-59	16ta	-	3a	Pan
AKR	-	2SA1806-R	Si-pnp	Sw, 15V, 100mA, 125mW, 1.5GHz, B=90..150	SOT-416	16ta	-	3a	Pan
AKR	-	2SB1198K-R	Si-pnp	AF-Drv, 80V, 500mA, 200mW, B=180..390, >180MHz	SOT-346	16ta	-	3a	Rhm
AKs	-	BCW70K	Si-pnp	GP, 45V, 100mA, 200mW, B=380..630, >150MHz	SOT-23	16ta	-	3c	Inf
AKs	-	BCX70K	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=380..630, 250MHz	SOT-23	16ta	-	3a	Sie
AKt	-	BCX70K	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=380..630, >100MHz	SOT-23	16ta	-	3a	PhM
AKV	-	MAX6461XR29-T	Vdet-IC	2.9V±2.5%, -Reset PPO	SOT-323	16vdc	VD7	3b	Max
AKW	-	BCX70K	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=380..630, >100MHz	SOT-23	16ta	-	3a	PhC
AKW	-	MAX6462XR16-T	Vdet-IC	1.6V±2.5%, +Reset PPO	SOT-323	16vdc	VD6	3b	Max
AKZ	-	MAX6465XR46-T	Vdet-IC	4.6V±2.5%, +Reset PPO, 150ms	SOT-323	16vdc	VD6	3b	Max
AL	-	2SA1980EF-L	Si-pnp	GP, 50V, 150mA, 150mW, B=300..700, 80MHz	SOT-523F	18ta	-	3a	Auk
AL	-	2SA1980E-L	Si-pnp	GP, 50V, 150mA, 150mW, B=300..700, 80MHz	SOT-523	16ta	-	3a	Auk
AL	-	30A02CH	Si-pnp	AF, GP, 30V, 700mA, 700mW, B=200..500, 520MHz	CPH3	16ta	-	3a	San
AL	-	30A02MH	Si-pnp	AF, GP, 30V, 700mA, 600mW, B=200..500, 520MHz	MCPH3	18ta	-	3a	San
AL	-	ADM810LART	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ad
AL	-	GS6333UR18D1	Vdet-IC	1.8V±1.8%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
AL	-	IMP810REUR	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Imp
AL	-	MMBTA55L	Si-pnp	AF-Drv, 60V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3a	Mot
AL	-	PT7M7810RT	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Pti
AL	-	RT9161-40CV	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AL	-	SiP6333R18D1	Vdet-IC	1.8V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
AL	cu	PT7M7810RTE	Vdet-IC	2.63V±1.5%, +Reset PPO, Lead free	SOT-23	16vdc	VD7	3b	Pti
-AL	-	PDTC123YT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxH
AL-	-	RT9818A-30PU3	Vdet-IC	3.0V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Rct
AL1	-	FA4A4Z	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=10k	SC-59	16ta	-	3a	Nec
AL1	-	GA4A4Z	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=10k	SOT-323	16ta	-	3a	Nec
AL4	-	2SA1338-4	Si-pnp	Sw, Hi-Sp, 60V, 500mA, 200mW, 200MHz, B=100..200	SOT-23	16ta	-	3a	San
AL5	-	2SA1338-5	Si-pnp	Sw, Hi-Sp, 60V, 500mA, 200mW, 200MHz, B=140..280	SOT-23	16ta	-	3a	San
AL6	-	2SA1338-6	Si-pnp	Sw, Hi-Sp, 60V, 500mA, 200mW, 200MHz, B=200..400	SOT-23	16ta	-	3a	San
AL7	-	2SA1338-7	Si-pnp	Sw, Hi-Sp, 60V, 500mA, 200mW, 300MHz, B=280..560	SOT-23	16ta	-	3a	San
ALA	-	MAX6466XR29-T	Vdet-IC	2.9V±2.5%, -Reset ODO, 150ms	SOT-323	16vdc	VD9	3b	Max
ALAA	-	HWD810REU	Vdet-IC	2.63V±2%, +Reset PPO	SOT-23	16vdc	VD7	3a	Csm
ALAA	-	MAX810RUR	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ALB	-	LM4041AEX3-1.2+T	Vref-IC	µPower, Precision, Shunt, 1.225V±0.1%, -40..+125°C	SC-70-3	16dk	RF1	3a	Max
ALB	-	MAX6466XR46-T	Vdet-IC	4.6V±2.5%, -Reset ODO, 150ms	SOT-323	16vdc	VD9	3b	Max
ALC	-	LM4041BEX3-1.2+T	Vref-IC	µPower, Precision, Shunt, 1.225V±0.2%, -40..+125°C	SC-70-3	16dk	RF1	3a	Max
ALD	-	LM4041CEX3-1.2+T	Vref-IC	µPower, Precision, Shunt, 1.225V±0.5%, -40..+125°C	SC-70-3	16dk	RF1	3a	Max
ALE	-	LM4041DEX3-1.2+T	Vref-IC	µPower, Precision, Shunt, 1.225V±1%, -40..+125°C	SC-70-3	16dk	RF1	3a	Max
ALF	-	LM4040AEX3-2.1+T	Vref-IC	µPower, Precision, Shunt, 2.048V±0.1%	SC-70	16dk	RF1	3a	Max
ALG	-	LM4040BEX3-2.1-T	Vref-IC	µPower, Precision, Shunt, 2.048V±0.2%	SC-70	16dk	RF1	3a	Max
ALH	-	LM4040CEX3-2.1+T	Vref-IC	µPower, Precision, Shunt, 2.048V±0.5%	SC-70	16dk	RF1	3a	Max
ALI	-	LM4040DEX3-2.1+T	Vref-IC	µPower, Precision, Shunt, 2.048V±1.0%	SC-70	16dk	RF1	3a	Max
ALJ	-	LM4040AEX3-2.5+T	Vref-IC	µPower, Precision, Shunt, 2.50V±0.1%	SC-70	16dk	RF1	3a	Max
ALK	-	LM4040BEX3-2.5+T	Vref-IC	µPower, Precision, Shunt, 2.50V±0.2%	SC-70	16dk	RF1	3a	Max
ALL	-	LM4040CEX3-2.5+T	Vref-IC	µPower, Precision, Shunt, 2.50V±0.5%	SC-70	16dk	RF1	3a	Max
ALM	-	2SC3802K-M	Si-npn	AF, 30V, 30mA, 200mW, B=39..82, >110MHz	SOT-346	16ta	-	3a	Rhm
ALM	-	LM4040DEX3-2.5+T	Vref-IC	µPower, Precision, Shunt, 2.50V±1.0%	SC-70	16dk	RF1	3a	Max
ALN	-	2SC3802K-N	Si-npn	AF, 30V, 30mA, 200mW, B=56..120, >110MHz	SOT-346	16ta	-	3a	Rhm
ALN	-	LM4040AEX3-3.0+T	Vref-IC	µPower, Precision, Shunt, 3.00V±0.1%	SC-70	16dk	RF1	3a	Max
ALO	-	LM4040BEX3-3.0+T	Vref-IC	µPower, Precision, Shunt, 3.00V±0.2%	SC-70	16dk	RF1	3a	Max
ALP	-	2SC3802K-P	Si-npn	AF, 30V, 30mA, 200mW, B=82..180, >110MHz	SOT-346	16ta	-	3a	Rhm
ALP	-	LM4040CEX3-3.0+T	Vref-IC	µPower, Precision, Shunt, 3.00V±0.5%	SC-70	16dk	RF1	3a	Max
ALQ	-	2SA1747-Q	Si-pnp	GP, 50V, 50mA, 200mW, 250MHz, B=50..120	SOT-23	16ta	-	3a	Pan
ALQ	-	2SA1748-Q	Si-pnp	HF, 50V, 50mA, 150mW, 250MHz, B=200..400	SOT-323	16ta	-	3a	Pan
ALQ	-	2SA1791-Q	Si-pnp	HF, 50V, 50mA, 125mW, 250MHz, B=200..400	SOT-416	16ta	-	3a	Pan
ALQ	-	2SC3802K-Q	Si-npn	AF, 30V, 30mA, 200mW, B=120..270, >110MHz	SOT-346	16ta	-	3a	Rhm
ALQ	-	LM4040DEX3-3.0+T	Vref-IC	µPower, Precision, Shunt, 3.00V±1.0%	SC-70	16dk	RF1	3a	Max
ALR	-	2SA1747-R	Si-pnp	GP, 50V, 50mA, 200mW, 250MHz, B=90..150	SOT-23	16ta	-	3a	Pan
ALR	-	2SA1748-R	Si-pnp	HF, 50V, 50mA, 150mW, 250MHz, B=250..500	SOT-323	16ta	-	3a	Pan
ALR	-	2SA1791-R	Si-pnp	HF, 50V, 50mA, 125mW, 250MHz, B=250..500	SOT-416	16ta	-	3a	Pan
ALR	-	LM4040AEX3-4.1+T	Vref-IC	µPower, Precision, Shunt, 4.096V±0.1%	SC-70	16dk	RF1	3a	Max
ALS	-	LM4040BEX3-4.1+T	Vref-IC	µPower, Precision, Shunt, 4.096V±0.2%	SC-70	16dk	RF1	3a	Max
ALT	-	LM4040CEX3-4.1+T	Vref-IC	µPower, Precision, Shunt, 4.096V±0.5%	SC-70	16dk	RF1	3a	Max
ALU	-	AME8500AEETDF26	Vdet-IC	2.63V±1.5%, +Reset ODO, 210ms	SOT-23	16vdc	VD6	3b	Ame
ALU	-	LM4040DEX3-4.1+T	Vref-IC	µPower, Precision, Shunt, 4.096V±1.0%	SC-70	16dk	RF1	3a	Max
ALU	cm	AME8500AEETDF26Z	Vdet-IC	2.63V±1.5%, +Reset ODO, 210ms, lead free	SOT-23	16vdc	VD6	3b	Ame
ALV	-	AME8500AEETCF29	Vdet-IC	2.93V±1.5%, +Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
ALV	-	LM4040AEX3-5.0+T	Vref-IC	µPower, Precision, Shunt, 5.00V±0.1%	SC-70	16dk	RF1	3a	Max
ALV	cm	AME8500AEETCF29Z	Vdet-IC	2.93V±1.5%, +Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ALW	-	LM4040BEX3-5.0+T	Vref-IC	µPower, Precision, Shunt, 5.00V±0.2%	SC-70	16dk	RF1	3a	Max
ALX	-	AME8500AEETAD20	Vdet-IC	2V±1.5%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3b	Ame
ALX	-	LM4040CEX3-5.0+T	Vref-IC	µPower, Precision, Shunt, 5.00V±0.5%	SC-70	16dk	RF1	3a	Max
ALX	cm	AME8500AEETAD20Z	Vdet-IC	2V±1.5%, -Reset PPO, 30ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ALY	-	AME8500AEETAE29	Vdet-IC	2.93V±1.5%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3b	Ame
ALY	-	LM4040DEX3-5.0+T	Vref-IC	µPower, Precision, Shunt, 5.00V±1.0%	SC-70	16dk	RF1	3a	Max
ALY	cm	AME8500AEETAE29Z	Vdet-IC	2.93V±1.5%, -Reset PPO, 150ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ALZ	-	AME8500AEETCD20	Vdet-IC	2V±1.5%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3b	Ame
ALZ	cm	AME8500AEETCD20Z	Vdet-IC	2V±1.5%, +Reset PPO, 30ms, lead free	SOT-23	16vdc	VD7	3b	Ame
aM	-	BU45K322G	Vdet-IC	3.2V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Am	-	BD48K32G	Vdet-IC	3.2V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
AM	-	2SJ284	p-MOSFET	Sw, U-Speed, LogL, 30V, 300mA, 250mW, <3.3Ω(0.15A), 7/40ns	SOT-23	16fh	-	3a	San
AM	-	50A02MH	Si-pnp	AF, GP, 50V, 500mA, 600mW, B=200..500, 690MHz	MCPH3	18ta	-	3a	San
AM	-	ADM810MART	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ad
AM	-	BSS64	Si-npn	GP, 120V, 100mA, 250mW, B>20, >60MHz	SOT-23	16ta	-	3a	Ons
AM	-	CPH3112	Si-pnp	DC/DC-Conv, 50V, 5A, 900mW, 250MHz, B=200..560	CPH3	16ta	-	3a	San
AM	-	GS6333UR18D2	Vdet-IC	1.8V±1.8%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
AM	-	MMBT3904W	Si-npn	GP, 60V, 100mA, 200mW, B= 100..300, >300MHz	SOT-23	16ta	-	3a	Mot
AM	-	MMBZ5234B	Z-diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 350mW	SOT-23	16dc	-	3c	Jiy
AM	-	PT7M7810ZT	Vdet-IC	2.32V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Pti
AM	-	RT9161-41CV	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AM	-	SiP6333R18D2	Vdet-IC	1.8V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
AM	cb	MIC803-41D3VC3	Vdet-IC	4.10V±2.5%, -Reset ODO, 140ms	SC-70	16vdc	VD7	3a	Mcr
AM	cb	MIC803-41D3VM3	Vdet-IC	4.10V±2.5%, -Reset ODO, 140ms	SOT-23	16vdc	VD7	3a	Mcr
AM	cu	PT7M7810ZTE	Vdet-IC	2.32V±1.5%, +Reset PPO, Lead free	SOT-23	16vdc	VD7	3b	Pti
-AM	-	PDTA113ZT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxH
AM-	-	RT9819B-24PU3	Vdet-IC	2.4V±1.5%, -Reset PPO, Td=55ms	SOT-323	16vdc	VD7	3a	Rct
AM1	-	FA4F4Z	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=22k	SC-59	16ta	-	3a	Nec
AM1	-	GA4F4Z	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=22k	SOT-323	16ta	-	3a	Nec
AMB	-	MAX6461XR16-T	Vdet-IC	1.6V±2.5%, -Reset PPO	SOT-323	16vdc	VD7	3b	Max
AMC	-	MAX6461XR22-T	Vdet-IC	2.2V±2.5%, -Reset PPO	SOT-323	16vdc	VD7	3b	Max
AMD	-	MAX6461XR26-T	Vdet-IC	2.6V±2.5%, -Reset PPO	SOT-323	16vdc	VD7	3b	Max
AME	-	MAX6461XR46-T	Vdet-IC	4.6V±2.5%, -Reset PPO	SOT-323	16vdc	VD7	3b	Max
AMF	-	MAX6462XR22-T	Vdet-IC	2.2V±2.5%, +Reset PPO	SOT-323	16vdc	VD6	3b	Max





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AMG	-	MAX6462XR26-T	Vdet-IC	2.6V±2.5%, +Reset PPO	SOT-323	16vdc	VD6	3b	Max
AMH	-	MAX6462XR29-T	Vdet-IC	2.9V±2.5%, +Reset PPO	SOT-323	16vdc	VD6	3b	Max
AMI	-	MAX6462XR46-T	Vdet-IC	4.6V±2.5%, +Reset PPO	SOT-323	16vdc	VD6	3b	Max
AMJ	-	MAX6463XR16-T	Vdet-IC	1.6V±2.5%, -Reset ODO	SOT-323	16vdc	VD9	3b	Max
AMK	-	MAX6463XR22-T	Vdet-IC	2.2V±2.5%, -Reset ODO	SOT-323	16vdc	VD9	3b	Max
AML	-	MAX6463XR26-T	Vdet-IC	2.6V±2.5%, -Reset ODO	SOT-323	16vdc	VD9	3b	Max
AMM	-	MAX6463XR29-T	Vdet-IC	2.9V±2.5%, -Reset ODO	SOT-323	16vdc	VD9	3b	Max
AMN	-	2SC4018K-N	Si-npn	AF, 40V, 100mA, 200mW, B=56..120, >230MHz	SOT-346	16ta	-	3a	Rhm
AMN	-	MAX6463XR46-T	Vdet-IC	4.6V±2.5%, -Reset ODO	SOT-323	16vdc	VD9	3b	Max
AMO	-	AME8500AEETAF29	Vdet-IC	2.93V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
AMO	-	MAX6464XR16-T	Vdet-IC	1.6V±2.5%, -Reset PPO, 150ms	SOT-323	16vdc	VD7	3b	Max
AMO	cm	AME8500AEETAF29Z	Vdet-IC	2.93V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
AMp	-	BSS64	Si-npn	GP, 120V, 100mA, 250mW, B>20, >60MHz	SOT-23	16ta	-	3a	PhH
AMP	-	2SC4018K-P	Si-npn	AF, 40V, 100mA, 200mW, B=82..180, >230MHz	SOT-346	16ta	-	3a	Rhm
AMP	-	AME8500AEETAF26	Vdet-IC	2.63V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
AMP	-	MAX6464XR22-T	Vdet-IC	2.2V±2.5%, -Reset PPO, 150ms	SOT-323	16vdc	VD7	3b	Max
AMP	cm	AME8500AEETAF26Z	Vdet-IC	2.63V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
AMQ	-	2SC4561-Q	Si-npn	GP, 50V, 50mA, 200mW, B=200..400, 250MHz	SOT-23	16ta	-	3a	Pan
AMQ	-	2SC4562-Q	Si-npn	HF, 50V, 50mA, 150mW, B=200..400, 250MHz	SOT-323	16ta	-	3a	Pan
AMQ	-	2SC4656-Q	Si-npn	HF, 50V, 50mA, 125mW, B=200..400, 250MHz	SOT-416	16ta	-	3a	Pan
AMQ	-	MAX6464XR26-T	Vdet-IC	2.6V±2.5%, -Reset PPO, 150ms	SOT-323	16vdc	VD7	3b	Max
AMR	-	2SC4561-R	Si-npn	GP, 50V, 50mA, 200mW, B=250..500, 250MHz	SOT-23	16ta	-	3a	Pan
AMR	-	2SC4562-R	Si-npn	HF, 50V, 50mA, 150mW, B=250..500, 250MHz	SOT-323	16ta	-	3a	Pan
AMR	-	2SC4656-R	Si-npn	HF, 50V, 50mA, 125mW, B=250..500, 250MHz	SOT-416	16ta	-	3a	Pan
AMR	-	MAX6464XR29-T	Vdet-IC	2.9V±2.5%, -Reset PPO, 150ms	SOT-323	16vdc	VD7	3b	Max
AMs	-	BSS64	Si-npn	GP, 120V, 100mA, 330mW, B=20..80, 100MHz	SOT-23	16ta	-	3a	Sie
AMS	-	MAX6464XR46-T	Vdet-IC	4.6V±2.5%, -Reset PPO, 150ms	SOT-323	16vdc	VD7	3b	Max
AMt	-	BSS64	Si-npn	GP, 120V, 100mA, 250mW, B>20, >60MHz	SOT-23	16ta	-	3a	PhM
AMT	-	MAX6465XR16-T	Vdet-IC	1.6V±2.5%, +Reset PPO, 150ms	SOT-323	16vdc	VD6	3b	Max
AMU	-	MAX6465XR22-T	Vdet-IC	2.2V±2.5%, +Reset PPO, 150ms	SOT-323	16vdc	VD6	3b	Max
AMV	-	MAX6465XR26-T	Vdet-IC	2.6V±2.5%, +Reset PPO, 150ms	SOT-323	16vdc	VD6	3b	Max
AMW	-	BSS64	Si-npn	GP, 120V, 100mA, 250mW, B>20, >60MHz	SOT-23	16ta	-	3a	PhC
AMW	-	MAX6465XR29-T	Vdet-IC	2.9V±2.5%, +Reset PPO, 150ms	SOT-323	16vdc	VD6	3b	Max
AMX	-	MAX6466XR16-T	Vdet-IC	1.6V±2.5%, -Reset ODO, 150ms	SOT-323	16vdc	VD9	3b	Max
AMY	-	MAX6466XR22-T	Vdet-IC	2.2V±2.5%, -Reset ODO, 150ms	SOT-323	16vdc	VD9	3b	Max
AMZ	-	MAX6466XR26-T	Vdet-IC	2.6V±2.5%, -Reset ODO, 150ms	SOT-323	16vdc	VD9	3b	Max
aN	-	BU45K332G	Vdet-IC	3.3V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
An	-	BD48K33G	Vdet-IC	3.3V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
AN	-	2SC2413K-N	Si-npn	HF-Amp, 40V, 50mA, 200mW, B=56..120, 300MHz	SOT-346	16ta	-	3a	Rhm
AN	-	2SC2532	Si-npn-Darl	AF-Drv, 40V, 300mA, 150mW, B>5000	SC-59	16ta	-	3a	Tos
AN	-	2SC4098-N	Si-npn	HF-Amp, 40V, 50mA, 200mW, B=56..120, >350MHz	SOT-323	16ta	-	3a	Rhm
AN	-	2SC4618-N	Si-npn	HF-Amp, 40V, 50mA, 150mW, B=56..120, 300MHz	SOT-416	16ta	-	3a	Rhm
AN	-	2SK3287	n-MOSFET	V-MOS, LogL, 30V, 0.3A, <3.44Ω	SOT-23	16fh	-	3a	Ren
AN	-	2SK3289	n-MOSFET	GP, 30V, 300mA, 400mW, 2.8Ω(4V), 800/2200ns	SOT-323	16fh	-	3a	Ren
AN	-	GS6333UR18D3	Vdet-IC	1.8V±1.8%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
AN	-	MMBZ5235B	Z-diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 350mW	SOT-23	16dc	-	3c	Jiy
AN	-	PT7M7810YT	Vdet-IC	2.20V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Pti
AN	-	RT9161-42CV	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AN	-	SiP6333R18D3	Vdet-IC	1.8V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
AN	cb	MIC803-41D4VC3	Vdet-IC	4.10V±2.5%, -Reset ODO, 1120ms	SC-70	16vdc	VD7	3a	Mcr
AN	cb	MIC803-41D4VM3	Vdet-IC	4.10V±2.5%, -Reset ODO, 1120ms	SOT-23	16vdc	VD7	3a	Mcr
AN	cu	PT7M7810YTE	Vdet-IC	2.20V±1.5%, +Reset PPO, Lead free	SOT-23	16vdc	VD7	3b	Pti
AN-	-	RT9819B-25PU3	Vdet-IC	2.5V±1.5%, -Reset PPO, Td=55ms	SOT-323	16vdc	VD7	3a	Rct
AN1	-	FA4L4Z	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=47k	SC-59	16ta	-	3a	Nec
AN1	-	GA4L4Z	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=47k	SOT-323	16ta	-	3a	Nec
ANG	-	MAX6138AEXR33-T	Vref-IC	Shunt, 3.30V±0.1%	SC-70	16dk	RF1	3a	Max
ANH	-	MAX6138BEXR33-T	Vref-IC	Shunt, 3.30V±0.2%	SC-70	16dk	RF1	3a	Max
ANI	-	MAX6138CEXR33-T	Vref-IC	Shunt, 3.30V±0.5%	SC-70	16dk	RF1	3a	Max
ANN	-	2SC4061K-N	Si-npn	Vid, 300V, 100mA, 200mW, B=56..120, >100MHz	SC-59	16ta	-	3a	Rhm
ANP	-	2SC4061K-P	Si-npn	Vid, 300V, 100mA, 200mW, B=82..180, >100MHz	SC-59	16ta	-	3a	Rhm
ANs	-	BCW60FN	Si-npn	GP, 32V, 200mA, 330mW, B=380..630, 250MHz	SOT-23	16ta	-	3a	Fer
ANY	-	LM4040AEX3-3.3+T	Vref-IC	µPower, Precision, Shunt, 3.30V±0.1%	SC-70	16dk	RF1	3a	Max
ANZ	-	LM4040BEX3-3.3+T	Vref-IC	µPower, Precision, Shunt, 3.30V±0.2%	SC-70	16dk	RF1	3a	Max
AO	-	2SA1980EF-O	Si-pnp	GP, 50V, 150mA, 150mW, B=70..140, 80MHz	SOT-523F	18ta	-	3a	Auk
AO	-	2SA1980E-O	Si-pnp	GP, 50V, 150mA, 150mW, B=70..140, 80MHz	SOT-523	16ta	-	3a	Auk
AO	-	2SC4210-O	Si-npn	AF, 35V, 800mA, 200mW, B=100..200, 120MHz	SC-59	16ta	-	3a	Tos
AO	-	BCW60AR	Si-npn	GP, 32V, 200mA, 250mW, B=120..220, 250MHz	SOT-23	16te	-	3a	Itt
AO	-	GS6333UR19D1	Vdet-IC	1.9V±1.8%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
AO	-	SiP6333R19D1	Vdet-IC	1.9V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
AOA	-	LM4040CEX3-3.3+T	Vref-IC	µPower, Precision, Shunt, 3.30V±0.5%	SC-70	16dk	RF1	3a	Max

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AOB	-	LM4040DEX3-3.3+T	Vref-IC	µPower, Precision, Shunt, 3.30V±1.0%	SC-70	16dk	RF1	3a	Max
AOM	-	ISL60002BIH312Z	Vref-IC	High precision, 1.250V±1.0mV	SOT-23	16vj	VR1	3d	Isl
AON	-	ISL60002BIH325Z	Vref-IC	High precision, 2.500V±1.0mV	SOT-23	16vj	VR1	3d	Isl
AOP	-	ISL60002BAH333Z	Vref-IC	High precision, 3.300V±1.0mV	SOT-23	16vj	VR1	3d	Isl
AOR	-	ISL60002CIH311Z	Vref-IC	High precision, 1.200V±2.5mV	SOT-23	16vj	VR1	3d	Isl
AOS	-	ISL60002CIH312Z	Vref-IC	High precision, 1.250V±2.5mV	SOT-23	16vj	VR1	3d	Isl
AOT	-	ISL60002CIH325Z	Vref-IC	High precision, 2.500V±2.5mV	SOT-23	16vj	VR1	3d	Isl
AOU	-	ISL60002CAH333Z	Vref-IC	High precision, 3.300V±2.5mV	SOT-23	16vj	VR1	3d	Isl
AOY	-	ISL60002DIH311Z	Vref-IC	High precision, 1.200V±5.0mV	SOT-23	16vj	VR1	3d	Isl
aP	-	BU45K342G	Vdet-IC	3.4V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Ap	-	BD48K34G	Vdet-IC	3.4V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
AP	-	2SC2413K-P	Si-npn	HF-Amp, 40V, 50mA, 200mW, B=82..180, 300MHz	SOT-346	16ta	-	3a	Rhm
AP	-	2SC4098-P	Si-npn	HF-Amp, 40V, 50mA, 200mW, B=82..180, >350MHz	SOT-323	16ta	-	3a	Rhm
AP	-	2SC4618-P	Si-npn	HF-Amp, 40V, 50mA, 150mW, B=82..180, 300MHz	SOT-416	16ta	-	3a	Rhm
AP	-	2SJ575	p-MOSFET	V-MOS, LogL, 30V, 0.1A, <7.9Ω	SOT-23	16fh	-	3a	Ren
AP	-	BCW60BR	Si-npn	GP, 32V, 200mA, 250mW, B=150..310, 250MHz	SOT-23	16te	-	3a	Itt
AP	-	CPH3114	Si-pnp	DC/DC-Conv, 15V, 1.5A, 900mW, 350MHz, B=200..560	CPH3	16ta	-	3a	San
AP	-	GS6333UR19D2	Vdet-IC	1.9V±1.8%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
AP	-	MMBZ5236B	Z-diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 350mW	SOT-23	16dc	-	3c	Jiy
AP	-	RT9161-43CV	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AP	-	SiP6333R19D2	Vdet-IC	1.9V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
AP	cb	MIC803-44D2VC3	Vdet-IC	4.38V±2.5%, -Reset ODO, 20ms	SC-70	16vdc	VD7	3a	Mcr
AP	cb	MIC803-44D2VM3	Vdet-IC	4.38V±2.5%, -Reset ODO, 20ms	SOT-23	16vdc	VD7	3a	Mcr
AP-	-	RT9818B-14PU3	Vdet-IC	1.4V±1.5%, -Reset ODO, Td=55ms	SOT-323	16vdc	VD6	3a	Rct
AP_	-	2SC4074M	Si-npn	UHF/VHF, 18V, 50mA, 150mW, B=270, >1.5GHz	SOT-346	16ta	-	3a	Rhm
AP1	-	FA4F3M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=2k2/2k2	SC-59	16ta	-	3a	Nec
AP1	-	GA4F3M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=2k2/2k2	SOT-323	16ta	-	3a	Nec
APA	-	ISL60002DIH312Z	Vref-IC	High precision, 1.250V±5.0mV	SOT-23	16vj	VR1	3d	Isl
APB	-	ISL60002DIH325Z	Vref-IC	High precision, 2.500V±5.0mV	SOT-23	16vj	VR1	3d	Isl
APC	-	ISL60002DAH333Z	Vref-IC	High precision, 3.300V±5.0mV	SOT-23	16vj	VR1	3d	Isl
APM	-	ISL60002BIH311Z	Vref-IC	High precision, 1.200V±1.0mV	SOT-23	16vj	VR1	3d	Isl
AQ	-	2PD1820AQ	Si-npn	GP, Sw, 60V, 500mA, 200mW, B=85..170, >150MHz	SOT-323	16ta	-	3a	PhH
AQ	-	2SA1979UF-Q	Si-pnp	AF, 40V, 500mA, 200mW, B=70..140, 200MHz	SOT-323F	18ta	-	3a	Auk
AQ	-	2SA1979U-Q	Si-pnp	AF, 40V, 500mA, 200mW, B=70..140, 200MHz	SOT-323	16ta	-	3a	Auk
AQ	-	2SB1218-Q	Si-pnp	AF, 25V, 100mA, 150mW, B=160..260, >80MHz	SOT-323	16ta	-	3a	Pan
AQ	-	2SB1462-Q	Si-pnp	GP, 60V, 100mA, 125mW, 80MHz, B=162..260	SOT-416	16ta	-	3a	Pan
AQ	-	2SB709-Q	Si-pnp	GP, AF, 50V, 600mA, B=160..260, 150MHz	SC-59	16ta	-	3a	Pan
AQ	-	2SC2413K-Q	Si-npn	HF-Amp, 40V, 50mA, 200mW, B=120..270, 300MHz	SOT-346	16ta	-	3a	Rhm
AQ	-	2SC4098-Q	Si-npn	HF-Amp, 40V, 50mA, 200mW, B=120..270, >350MHz	SOT-323	16ta	-	3a	Rhm
AQ	-	2SC4618-Q	Si-npn	HF-Amp, 40V, 50mA, 150mW, B=120..270, 300MHz	SOT-416	16ta	-	3a	Rhm
AQ	-	CPH3115	Si-pnp	DC/DC-Conv, 30V, 1.5A, 900mW, 450MHz, B=200..560	CPH3	16ta	-	3a	San
AQ	cb	MIC803-44D3VC3	Vdet-IC	4.38V±2.5%, -Reset ODO, 140ms	SC-70	16vdc	VD7	3a	Mcr
AQ	cb	MIC803-44D3VM3	Vdet-IC	4.38V±2.5%, -Reset ODO, 140ms	SOT-23	16vdc	VD7	3a	Mcr
AQ-	-	RT9818C-25PU3	Vdet-IC	2.5V±1.5%, -Reset ODO, Td=220ms	SOT-323	16vdc	VD6	3a	Rct
AQ1	-	FA4F3P	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=2k2/10k	SC-59	16ta	-	3a	Nec
AQ1	-	GA4F3P	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=2k2/10k	SOT-323	16ta	-	3a	Nec
AQP	-	2SB1051K-P	Si-pnp	AF-Drv, 40V, 1A, 200mW, B=82..180, >150MHz	SOT-346	16ta	-	3a	Rhm
AQQ	-	2SB1051K-Q	Si-pnp	AF-Drv, 40V, 1A, 200mW, B=120..270, >150MHz	SOT-346	16ta	-	3a	Rhm
AQR	-	2SB1051K-R	Si-pnp	AF-Drv, 40V, 1A, 200mW, B=180..390, >150MHz	SOT-346	16ta	-	3a	Rhm
AQV	cm	AME8800SEETY	LVR-IC	LDO, 5.0V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
AQV	cm	AME8800SEETZ	LVR-IC	LDO, 5.0V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
AQW	-	2PD1820AQ	Si-npn	GP, Sw, 60V, 500mA, 200mW, B=85..170, >150MHz	SOT-323	16ta	-	3a	PhC
aR	-	BU45K352G	Vdet-IC	3.5V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Ar	-	BD48K35G	Vdet-IC	3.5V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
AR	-	2PD1820AR	Si-npn	GP, Sw, 60V, 500mA, 200mW, B=120..240, >150MHz	SOT-323	16ta	-	3a	PhH
AR	-	2SB1218-R	Si-pnp	AF, 25V, 100mA, 150mW, B=210..340, >80MHz	SOT-323	16ta	-	3a	Pan
AR	-	2SB1462-R	Si-pnp	GP, 60V, 100mA, 125mW, 80MHz, B=210..340	SOT-416	16ta	-	3a	Pan
AR	-	2SB709-R	Si-pnp	GP, AF, 50V, 600mA, B=210..340, 150MHz	SC-59	16ta	-	3a	Pan
AR	-	ADM810RART	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ad
AR	-	BCW60CR	Si-npn	GP, 32V, 200mA, 0.33W, B=250..460, 250MHz	SOT-23	16te	-	3a	Zx
AR	-	CPH3116	Si-pnp	DC/DC-Conv, 50V, 1A, 900mW, 420MHz, B=200..560	CPH3	16ta	-	3a	San
AR	-	GS6333UR19D3	Vdet-IC	1.9V±1.8%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
AR	-	MMBZ5237B	Z-diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 350mW	SOT-23	16dc	-	3c	Jiy
AR	-	MSB709	Si-pnp	GP, 60V, 100mA, 200mW, B=210..340, <300µs	SOT-23	16ta	-	3a	Wtr
AR	-	MSB709-R	Si-pnp	GP, 60V, 100mA, 200mW, B=210..340, <300µs	SOT-323	16ta	-	3a	Mot
AR	-	RT9161-45CV	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AR	-	SiP6333R19D3	Vdet-IC	1.9V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
AR	-	SRA2210E	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=4.7k	SOT-523	16ta	-	3a	Auk
AR	-	SRA2210EF	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=4.7k	SOT-523F	18ta	-	3a	Auk
AR	-	SRA2210U	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=4.7k	SOT-323	16ta	-	3a	Auk

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AR	-	SRA2210UF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=4.7k	SOT-323F	18ta	-	3a	Auk
AR	cb	MIC803-44D4VC3	Vdet-IC	4.38V±2.5%, -Reset ODO, 1120ms	SC-70	16vdc	VD7	3a	Mcr
AR	cb	MIC803-44D4VM3	Vdet-IC	4.38V±2.5%, -Reset ODO, 1120ms	SOT-23	16vdc	VD7	3a	Mcr
AR-	-	RT9819B-29PU3	Vdet-IC	2.9V±1.5%, -Reset PPO, Td=55ms	SOT-323	16vdc	VD7	3a	Rct
AR1	-	FA4F3R	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=2k2/47k	SC-59	16ta	-	3a	Nec
AR1	-	GA4F3R	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=2k2/47k	SOT-323	16ta	-	3a	Nec
AR3D	-	AR3PD	Si-diode	Rectifier, 200V, 3A, Vf<1.2V(3A)	TO-277A	76dh	-	3o	Vs
AR3G	-	AR3PG	Si-diode	Rectifier, 400V, 3A, Vf<1.2V(3A)	TO-277A	76dh	-	3o	Vs
AR3J	-	AR3PJ	Si-diode	Rectifier, 600V, 3A, Vf<1.2V(3A)	TO-277A	76dh	-	3o	Vs
AR3K	-	AR3PK	Si-diode	Rectifier, 800V, 3A, Vf<1.6V(3A)	TO-277A	76dh	-	3o	Vs
AR3M	-	AR3PM	Si-diode	Rectifier, 1000V, 3A, Vf<1.6V(3A)	TO-277A	76dh	-	3o	Vs
AR4D	-	AR4PD	Si-diode	Rectifier, 200V, 4A, Vf<1.2V(4A)	TO-277A	76dh	-	3o	Vs
AR4G	-	AR4PG	Si-diode	Rectifier, 400V, 4A, Vf<1.2V(4A)	TO-277A	76dh	-	3o	Vs
AR4J	-	AR4PJ	Si-diode	Rectifier, 600V, 4A, Vf<1.2V(4A)	TO-277A	76dh	-	3o	Vs
AR4K	-	AR4PK	Si-diode	Rectifier, 800V, 4A, Vf<1.6V(4A)	TO-277A	76dh	-	3o	Vs
AR4M	-	AR4PM	Si-diode	Rectifier, 1000V, 4A, Vf<1.6V(4A)	TO-277A	76dh	-	3o	Vs
ARI	-	AME8500AEETDF46	Vdet-IC	4.63V±1.5%, +Reset ODO, 210ms	SOT-23	16vdc	VD6	3b	Ame
ARI	cm	AME8500AEETDF46Z	Vdet-IC	4.63V±1.5%, +Reset ODO, 210ms, lead free	SOT-23	16vdc	VD6	3b	Ame
ARJ	-	AME8500AEETCF46	Vdet-IC	4.63V±1.5%, +Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
ARJ	cm	AME8500AEETCF46Z	Vdet-IC	4.63V±1.5%, +Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ARK	-	AME8500AEETAF46	Vdet-IC	4.63V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
ARK	cm	AME8500AEETAF46Z	Vdet-IC	4.63V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ARL	-	AME8500BEETBA29	Vdet-IC	2.93V±1.5%, -Reset ODO, 1.5ms	SOT-23	16vdb	VD6	3b	Ame
ARL	cm	AME8500BEETBA29Z	Vdet-IC	2.93V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-23	16vdb	VD6	3b	Ame
ARM	-	AME8500BEETAA27	Vdet-IC	2.7V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdb	VD7	3b	Ame
ARM	cm	AME8500BEETAA27Z	Vdet-IC	2.7V±1.5%, -Reset PPO, 1.5ms, lead free	SOT-23	16vdb	VD7	3b	Ame
ARN	-	AME8500AEETAF44	Vdet-IC	4.38V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
ARN	cm	AME8500AEETAF44Z	Vdet-IC	4.38V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ARQ	-	AME8500AEETBA30	Vdet-IC	3.0V±1.5%, -Reset ODO, 1.5ms	SOT-23	16vdc	VD6	3b	Ame
ARQ	cm	AME8500AEETBA30Z	Vdet-IC	3.0V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-23	16vdc	VD6	3b	Ame
ARR	-	2SA2009-R	Si-pnp	AF, 120V, 20mA, 150mW, B=180..360, 200MHz	SOT-323	16ta	-	3a	Pan
ARR	-	AME8500AEETBA24	Vdet-IC	2.40V±1.5%, -Reset ODO, 1.5ms	SOT-23	16vdc	VD6	3b	Ame
ARR	cm	AME8500AEETBA24Z	Vdet-IC	2.40V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-23	16vdc	VD6	3b	Ame
ARS	-	2SA2009-S	Si-pnp	AF, 120V, 20mA, 150mW, B=260..520, 200MHz	SOT-323	16ta	-	3a	Pan
ART	-	2SA2009-T	Si-pnp	AF, 120V, 20mA, 150mW, B=360..700, 200MHz	SOT-323	16ta	-	3a	Pan
ART	-	AME8500BEETAA21	Vdet-IC	2.1V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdb	VD7	3b	Ame
ART	cm	AME8500BEETAA21Z	Vdet-IC	2.1V±1.5%, -Reset PPO, 1.5ms, lead free	SOT-23	16vdb	VD7	3b	Ame
ARW	-	2PD1820AR	Si-npn	GP, Sw, 60V, 500mA, 200mW, B=120..240, >150MHz	SOT-323	16ta	-	3a	PhC
ARW	-	AME8500CEETBF46	Vdet-IC	4.63V±1.5%, -Reset ODO, 210ms	SOT-23	16vda	VD6	3b	Ame
ARW	cm	AME8500CEETBF46Z	Vdet-IC	4.63V±1.5%, -Reset ODO, 210ms, lead free	SOT-23	16vda	VD6	3b	Ame
ARY	-	AME8500AEETAD29	Vdet-IC	2.93V±1.5%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3b	Ame
ARY	cm	AME8500AEETAD29Z	Vdet-IC	2.93V±1.5%, -Reset PPO, 30ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ARZ	-	AME8500BEETAA29	Vdet-IC	2.93V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdb	VD7	3b	Ame
ARZ	cm	AME8500BEETAA29Z	Vdet-IC	2.93V±1.5%, -Reset PPO, 1.5ms, lead free	SOT-23	16vdb	VD7	3b	Ame
aS	-	BU45K362G	Vdet-IC	3.6V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
AS	-	2PD1820AS	Si-npn	GP, Sw, 60V, 500mA, 200mW, B=170..340, >150MHz	SOT-323	16ta	-	3a	PhH
AS	-	2SA1655	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3a	San
AS	-	2SB1218-S	Si-pnp	AF, 25V, 100mA, 150mW, B=290..460, >80MHz	SOT-323	16ta	-	3a	Pan
AS	-	2SB1462-S	Si-pnp	GP, 60V, 100mA, 125mW, 80MHz, B=290..460	SOT-416	16ta	-	3a	Pan
AS	-	2SB709-S	Si-pnp	GP, AF, 50V, 600mA, B=290..460, 150MHz	SC-59	16ta	-	3a	Pan
AS	-	ADM810SART	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ad
AS	-	BAT18-05	PIN-diode	Dual, Sw, 35V, 0.1A, Vf<1.2V, Cd<1pF	SOT-23	16dg	-	3a	Sie
AS	-	GS6333UR20D1	Vdet-IC	2.0V±1.8%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
AS	-	SiP6333R20D1	Vdet-IC	2.0V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
AS	cb	MIC803-46D2VC3	Vdet-IC	4.63V±2.5%, -Reset ODO, 20ms	SC-70	16vdc	VD7	3a	Mcr
AS	cb	MIC803-46D2VM3	Vdet-IC	4.63V±2.5%, -Reset ODO, 20ms	SOT-23	16vdc	VD7	3a	Mcr
AS-	-	RT9818C-13PU3	Vdet-IC	1.3V±1.5%, -Reset ODO, Td=220ms	SOT-323	16vdc	VD6	3a	Rct
AS1	-	FA4A4L	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/4k7	SC-59	16ta	-	3a	Nec
AS1	-	GA4A4L	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/4k7	SOT-323	16ta	-	3a	Nec
AS3D	-	AS3PD	Si-diode	Rectifier, 200V, 3A, Vf<0.95V(3A)	TO-277A	76dh	-	3o	Vs
AS3G	-	AS3PG	Si-diode	Rectifier, 400V, 3A, Vf<0.95V(3A)	TO-277A	76dh	-	3o	Vs
AS3J	-	AS3PJ	Si-diode	Rectifier, 600V, 3A, Vf<0.95V(3A)	TO-277A	76dh	-	3o	Vs
AS3K	-	AS3PK	Si-diode	Rectifier, 800V, 3A, Vf<0.95V(3A)	TO-277A	76dh	-	3o	Vs
AS3M	-	AS3PM	Si-diode	Rectifier, 1000V, 3A, Vf<0.95V(3A)	TO-277A	76dh	-	3o	Vs
AS4D	-	AS4PD	Si-diode	Rectifier, 200V, 4A, Vf<0.98V(3A)	TO-277A	76dh	-	3o	Vs
AS4G	-	AS4PG	Si-diode	Rectifier, 400V, 4A, Vf<0.98V(3A)	TO-277A	76dh	-	3o	Vs
AS4J	-	AS4PJ	Si-diode	Rectifier, 600V, 4A, Vf<0.98V(3A)	TO-277A	76dh	-	3o	Vs
AS4K	-	AS4PK	Si-diode	Rectifier, 800V, 4A, Vf<0.98V(3A)	TO-277A	76dh	-	3o	Vs
AS4M	-	AS4PM	Si-diode	Rectifier, 1000V, 4A, Vf<0.98V(3A)	TO-277A	76dh	-	3o	Vs
ASA	-	AME8500AEETAF31	Vdet-IC	3.08V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ASA	-	BC846UA	Si-npn	GP, 80V, 100mA, 200mW, B=110..220, >100MHz	SOT-323	16ta	-	3a	Auk
ASA	-	BC846UFA	Si-npn	GP, 80V, 100mA, 200mW, B=110..220, >100MHz	SOT-323F	18ta	-	3a	Auk
ASA	cm	AME8500AEETAF31Z	Vdet-IC	3.08V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ASB	-	AME8500AEETAF40	Vdet-IC	4V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
ASB	-	BC846UB	Si-npn	GP, 80V, 100mA, 200mW, B=200..450, >100MHz	SOT-323	16ta	-	3a	Auk
ASB	-	BC846UFB	Si-npn	GP, 80V, 100mA, 200mW, B=200..450, >100MHz	SOT-323F	18ta	-	3a	Auk
ASB	cm	AME8500AEETAF40Z	Vdet-IC	4V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ASB3	-	AS1903C31	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASBA	-	AS1901C23	Vdet-IC	2.32V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Asm
ASBD	-	AS1901C26	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Asm
ASBI	-	AS1901C31	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Asm
ASBK	-	AS1902C23	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASBN	-	AS1902C26	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASBS	-	AS1902C31	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASBU	-	AS1903C23	Vdet-IC	2.32V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASBX	-	AS1903C26	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASC	-	AME8500BEETAA30	Vdet-IC	3.0V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdb	VD7	3b	Ame
ASC	-	BC846UC	Si-npn	GP, 80V, 100mA, 200mW, B=420..800, >100MHz	SOT-323	16ta	-	3a	Auk
ASC	-	BC846UFC	Si-npn	GP, 80V, 100mA, 200mW, B=420..800, >100MHz	SOT-323F	18ta	-	3a	Auk
ASC	cm	AME8500BEETAA30Z	Vdet-IC	3.0V±1.5%, -Reset PPO, 1.5ms, lead free	SOT-23	16vdb	VD7	3b	Ame
ASDB	-	AS1904C26	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASDG	-	AS1904C31	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASDI	-	AS1905C23	Vdet-IC	2.32V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASDL	-	AS1905C26	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASDQ	-	AS1905C31	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASDS	-	AS1906C23	Vdet-IC	2.32V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Asm
ASDV	-	AS1906C26	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Asm
ASDX	-	AS1906C28	Vdet-IC	2.8V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Asm
ASG	-	AME8500AEETAF30	Vdet-IC	3.0V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
ASG	-	KTA1504-GR	Si-pnp	GP, 50V, 150mA, 150mW, B=200..400, >80MHz	SOT-23	16ta	-	3f	Kec
ASG	cm	AME8500AEETAF30Z	Vdet-IC	3.0V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ASGI	-	AS1904C23	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASGK	-	AS1906C31	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Asm
ASH	-	AME8500CEETAE26	Vdet-IC	2.63V±1.5%, -Reset PPO, 150ms	SOT-23	16vda	VD7	3b	Ame
ASH	cm	AME8500CEETAE26Z	Vdet-IC	2.63V±1.5%, -Reset PPO, 150ms, lead free	SOT-23	16vda	VD7	3b	Ame
ASH1	-	AS1909C20-T	Vdet-IC	2.0V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Asm
ASH2	-	AS1909C23-T	Vdet-IC	2.3V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Asm
ASHP	-	AS1907C16-T	Vdet-IC	1.6V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASHQ	-	AS1907C18-T	Vdet-IC	1.8V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASHR	-	AS1907C20-T	Vdet-IC	2.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASHU	-	AS1908C18-T	Vdet-IC	1.8V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASHV	-	AS1908C20-T	Vdet-IC	2.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASHX	-	AS1907B23-T	Vdet-IC	2.3V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASHY	-	AS1909C16-T	Vdet-IC	1.6V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Asm
ASHZ	-	AS1909C17-T	Vdet-IC	1.7V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Asm
ASI	-	AME8500BEETBA42	Vdet-IC	4.2V±1.5%, -Reset ODO, 1.5ms	SOT-23	16vdb	VD6	3b	Ame
ASI	cm	AME8500BEETBA42Z	Vdet-IC	4.2V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-23	16vdb	VD6	3b	Ame
ASJ	-	AME8500AEETAE26	Vdet-IC	2.63V±1.5%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3b	Ame
ASJ	cm	AME8500AEETAE26Z	Vdet-IC	2.63V±1.5%, -Reset PPO, 150ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ASK	-	AME8500AEETAF21	Vdet-IC	2.1V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
ASK	cm	AME8500AEETAF21Z	Vdet-IC	2.1V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ASL	-	AME8500CEETAF29	Vdet-IC	2.93V±1.5%, -Reset PPO, 210ms	SOT-23	16vda	VD7	3b	Ame
ASL	cm	AME8500CEETAF29Z	Vdet-IC	2.93V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vda	VD7	3b	Ame
ASNB	-	AS1907C22-T	Vdet-IC	2.2V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Asm
ASNC	-	AS1909C22-T	Vdet-IC	2.2V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Asm
ASND	-	AS1909C18-T	Vdet-IC	1.8V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Asm
ASO	-	KTA1504-O	Si-pnp	GP, 50V, 150mA, 150mW, B=70..140, >80MHz	SOT-23	16ta	-	3f	Kec
ASQ	-	AME8500BEETBA27	Vdet-IC	2.7V±1.5%, -Reset ODO, 1.5ms	SOT-23	16vdb	VD6	3b	Ame
ASQ	cm	AME8500BEETBA27Z	Vdet-IC	2.7V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-23	16vdb	VD6	3b	Ame
ASR	-	AME8500BEETAA28	Vdet-IC	2.8V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdb	VD7	3b	Ame
ASR	cm	AME8500BEETAA28Z	Vdet-IC	2.8V±1.5%, -Reset PPO, 1.5ms, lead free	SOT-23	16vdb	VD7	3b	Ame
ASS	-	AME8500BEETBA28	Vdet-IC	2.8V±1.5%, -Reset ODO, 1.5ms	SOT-23	16vdb	VD6	3b	Ame
ASS	cm	AME8500BEETBA28Z	Vdet-IC	2.8V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-23	16vdb	VD6	3b	Ame
ASSB	-	AS1909C168-T	Vdet-IC	1.68V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Asm
ASU	-	AME8500AEETCF31	Vdet-IC	3.08V±1.5%, +Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
ASU	cm	AME8500AEETCF31Z	Vdet-IC	3.08V±1.5%, +Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ASV	-	AME8500AEETAA21	Vdet-IC	2.1V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3b	Ame
ASV	cm	AME8500AEETAA21Z	Vdet-IC	2.1V±1.5%, -Reset PPO, 1.5ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ASW	-	2PD1820AS	Si-npn	GP, Sw, 60V, 500mA, 200mW, B=170..340, >150MHz	SOT-323	16ta	-	3a	PhC
ASW	-	AME8500AEETCA21	Vdet-IC	2.1V±1.5%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3b	Ame

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ASW	cm	AME8500AEETCA21Z	Vdet-IC	2.1V±1.5%, +Reset PPO, 1.5ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ASX	-	AME8500BEETCA21	Vdet-IC	2.1V±1.5%, +Reset PPO, 1.5ms	SOT-23	16vdb	VD7	3b	Ame
ASX	cm	AME8500BEETCA21Z	Vdet-IC	2.1V±1.5%, +Reset PPO, 1.5ms, lead free	SOT-23	16vdb	VD7	3b	Ame
ASY	-	AME8500CEETAA21	Vdet-IC	2.1V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vda	VD7	3b	Ame
ASY	-	KTA1504-Y	Si-pnp	GP, 50V, 150mA, 150mW, B=120..240, >80MHz	SOT-23	16ta	-	3f	Kec
ASY	cm	AME8500CEETAA21Z	Vdet-IC	2.1V±1.5%, -Reset PPO, 1.5ms, lead free	SOT-23	16vda	VD7	3b	Ame
ASZ	-	AME8500CEETCA21	Vdet-IC	2.1V±1.5%, +Reset PPO, 1.5ms	SOT-23	16vda	VD7	3b	Ame
ASZ	cm	AME8500CEETCA21Z	Vdet-IC	2.1V±1.5%, +Reset PPO, 1.5ms, lead free	SOT-23	16vda	VD7	3b	Ame
aT	-	BU45K372G	Vdet-IC	3.7V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
AT	-	2SA2028	Si-pnp	DC/DC-Conv, 20V, 1A, 150mW, B=160..500, 170MHz	SOT-323	16ta	-	3a	Pan
AT	-	2SC4066	Si-npn	AF, GP, 50V, 100mA, 200mW, B>80, 250MHz	SOT-23	16ta	-	3a	San
AT	-	ADM810TART	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ad
AT	-	BAT18-06	PIN-diode	Dual, Sw, 35V, 0.1A, Vf<1.2V, Cd<1pF	SOT-23	16df	-	3a	Sie
AT	-	GS6333UR20D2	Vdet-IC	2.0V±1.8%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
AT	-	SiP6333R20D2	Vdet-IC	2.0V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
AT	cb	MIC803-46D3VC3	Vdet-IC	4.63V±2.5%, -Reset ODO, 140ms	SC-70	16vdc	VD7	3a	Mcr
AT	cb	MIC803-46D3VM3	Vdet-IC	4.63V±2.5%, -Reset ODO, 140ms	SOT-23	16vdc	VD7	3a	Mcr
AT=	-	RT9818C-27GU3	Vdet-IC	2.7V±1.5%, -Reset ODO, Td=220ms	SOT-323	16vdc	VD6	3a	Rct
AT1	-	FA4L4K	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/10k	SC-59	16ta	-	3a	Nec
AT1	-	GA4L4K	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/10k	SOT-323	16ta	-	3a	Nec
ATD	-	AME8500AEETAF15	Vdet-IC	1.5V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
ATD	cm	AME8500AEETAF15Z	Vdet-IC	1.5V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ATE	-	AME8500AEETAF16	Vdet-IC	1.6V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
ATE	cm	AME8500AEETAF16Z	Vdet-IC	1.6V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ATO	-	AME8500BEETAF31	Vdet-IC	3.08V±1.5%, -Reset PPO, 210ms	SOT-23	16vdb	VD7	3b	Ame
ATO	cm	AME8500BEETAF31Z	Vdet-IC	3.08V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdb	VD7	3b	Ame
ATP	-	AME8500BEETAA45	Vdet-IC	4.50V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdb	VD7	3b	Ame
ATP	cm	AME8500BEETAA45Z	Vdet-IC	4.50V±1.5%, -Reset PPO, 1.5ms, lead free	SOT-23	16vdb	VD7	3b	Ame
AtQ	-	2PD1820AQ	Si-npn	GP, Sw, 60V, 500mA, 200mW, B=85..170, >150MHz	SOT-323	16ta	-	3a	PhM
ATQ	-	2SC4326K-Q	Si-npn	HF, 12V, 50mA, 150mW, B=120..270, >800MHz	SOT-346	16ta	-	3a	Rhm
ATQ	-	AME8500BEETAF40	Vdet-IC	4V±1.5%, -Reset PPO, 210ms	SOT-23	16vdb	VD7	3b	Ame
ATQ	cm	AME8500BEETAF40Z	Vdet-IC	4V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdb	VD7	3b	Ame
AtR	-	2PD1820AR	Si-npn	GP, Sw, 60V, 500mA, 200mW, B=120..240, >150MHz	SOT-323	16ta	-	3a	PhM
ATR	-	2SC4326K-R	Si-npn	HF, 12V, 50mA, 150mW, B=180..390, >800MHz	SOT-346	16ta	-	3a	Rhm
ATR	-	AME8500AEETAF27	Vdet-IC	2.7V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
ATR	cm	AME8500AEETAF27Z	Vdet-IC	2.7V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
AtS	-	2PD1820AS	Si-npn	GP, Sw, 60V, 500mA, 200mW, B=170..340, >150MHz	SOT-323	16ta	-	3a	PhM
ATS	-	2SC4326K-S	Si-npn	HF, 12V, 50mA, 150mW, B=270..560, >800MHz	SOT-346	16ta	-	3a	Rhm
ATS	-	AME8500AEETAE46	Vdet-IC	4.63V±1.5%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3b	Ame
ATS	cm	AME8500AEETAE46Z	Vdet-IC	4.63V±1.5%, -Reset PPO, 150ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ATT	-	AME8500AEETAF23	Vdet-IC	2.32V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
ATT	cm	AME8500AEETAF23Z	Vdet-IC	2.32V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
ATY	-	AME8500AEETCF21	Vdet-IC	2.1V±1.5%, +Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
ATY	cm	AME8500AEETCF21Z	Vdet-IC	2.1V±1.5%, +Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
AU	-	BAT18-04	PIN-diode	Dual, Sw, 35V, 0.1A, Vf<1.2V, Cd<1pF	SOT-23	16dl	-	3a	Sie
AU	-	BCW60GR	Si-npn	GP, 32V, 200mA, 0.33W, B=250..460, 250MHz	SOT-23	16te	-	3a	Fer
AU	-	BCX70RG	Si-npn	GP, 45V, 100mA, 330mW, B= 120..220, 250MHz	SOT-23	16ta	-	3a	Sie
AU	cb	MIC803-46D4VC3	Vdet-IC	4.63V±2.5%, -Reset ODO, 1120ms	SC-70	16vdc	VD7	3a	Mcr
AU	cb	MIC803-46D4VM3	Vdet-IC	4.63V±2.5%, -Reset ODO, 1120ms	SOT-23	16vdc	VD7	3a	Mcr
AU=	-	RT9818B-27GU3	Vdet-IC	2.7V±1.5%, -Reset ODO, Td=55ms	SOT-323	16vdc	VD6	3a	Rct
AU2D	-	AU2PD	Si-diode	Rectifier, 200V, 2A, Vf<1.4V(2A)	TO-277A	76dh	-	3o	Vs
AU2G	-	AU2PG	Si-diode	Rectifier, 400V, 2A, Vf<1.4V(2A)	TO-277A	76dh	-	3o	Vs
AU2J	-	AU2PJ	Si-diode	Rectifier, 600V, 2A, Vf<1.4V(2A)	TO-277A	76dh	-	3o	Vs
AU2K	-	AU2PK	Si-diode	Rectifier, 800V, 2A, Vf<2V(2A)	TO-277A	76dh	-	3o	Vs
AU2M	-	AU2PM	Si-diode	Rectifier, 1000V, 2A, Vf<2V(2A)	TO-277A	76dh	-	3o	Vs
AU3D	-	AU3PD	Si-diode	Rectifier, 200V, 3A, Vf<1.4V(3A)	TO-277A	76dh	-	3o	Vs
AU3G	-	AU3PG	Si-diode	Rectifier, 400V, 3A, Vf<1.4V(3A)	TO-277A	76dh	-	3o	Vs
AU3J	-	AU3PJ	Si-diode	Rectifier, 600V, 3A, Vf<1.4V(3A)	TO-277A	76dh	-	3o	Vs
AU3K	-	AU3PK	Si-diode	Rectifier, 800V, 3A, Vf<2V(3A)	TO-277A	76dh	-	3o	Vs
AU3M	-	AU3PM	Si-diode	Rectifier, 1000V, 3A, Vf<2V(3A)	TO-277A	76dh	-	3o	Vs
AUA	-	AME8500AEETAE20	Vdet-IC	2V±1.5%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3b	Ame
AUA	cm	AME8500AEETAE20Z	Vdet-IC	2V±1.5%, -Reset PPO, 150ms, lead free	SOT-23	16vdc	VD7	3b	Ame
AUB	-	AME8500AEETAE31	Vdet-IC	3.08V±1.5%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3b	Ame
AUB	cm	AME8500AEETAE31Z	Vdet-IC	3.08V±1.5%, -Reset PPO, 150ms, lead free	SOT-23	16vdc	VD7	3b	Ame
AUC	-	AME8500BEETAF27	Vdet-IC	2.7V±1.5%, -Reset PPO, 210ms	SOT-23	16vdb	VD7	3b	Ame
AUC	cm	AME8500BEETAF27Z	Vdet-IC	2.7V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdb	VD7	3b	Ame
AUT	-	AME8500AEETBF31	Vdet-IC	3.08V±1.5%, -Reset ODO, 210ms	SOT-23	16vdc	VD6	3b	Ame
AUT	cm	AME8500AEETBF31Z	Vdet-IC	3.08V±1.5%, -Reset ODO, 210ms, lead free	SOT-23	16vdc	VD6	3b	Ame
AUU	-	AME8500AEETBF46	Vdet-IC	4.63V±1.5%, -Reset ODO, 210ms	SOT-23	16vdc	VD6	3b	Ame
AUU	cm	AME8500AEETBF46Z	Vdet-IC	4.63V±1.5%, -Reset ODO, 210ms, lead free	SOT-23	16vdc	VD6	3b	Ame

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AUV	-	AME8500BEETAF29	Vdet-IC	2.93V±1.5%, -Reset PPO, 210ms	SOT-23	16vdb	VD7	3b	Ame
AUV	cm	AME8500BEETAF29Z	Vdet-IC	2.93V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdb	VD7	3b	Ame
AUW	-	AME8500BEETBA21	Vdet-IC	2.1V±1.5%, -Reset ODO, 1.5ms	SOT-23	16vdb	VD6	3b	Ame
AUW	cm	AME8500BEETBA21Z	Vdet-IC	2.1V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-23	16vdb	VD6	3b	Ame
AUX	-	AME8500BEETBA24	Vdet-IC	2.4V±1.5%, -Reset ODO, 1.5ms	SOT-23	16vdb	VD6	3b	Ame
AUX	cm	AME8500BEETBA24Z	Vdet-IC	2.4V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-23	16vdb	VD6	3b	Ame
AUY	-	AME8500AEETAF25	Vdet-IC	2.50V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
AUY	cm	AME8500AEETAF25Z	Vdet-IC	2.50V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
AUZ	-	AME8500CEETAE42	Vdet-IC	4.2V±1.5%, -Reset PPO, 150ms	SOT-23	16vda	VD7	3b	Ame
AUZ	cm	AME8500CEETAE42Z	Vdet-IC	4.2V±1.5%, -Reset PPO, 150ms, lead free	SOT-23	16vda	VD7	3b	Ame
AV	-	GS6333UR20D3	Vdet-IC	2.0V±1.8%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
AV	-	SiP6333R20D3	Vdet-IC	2.0V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
AV	cb	MIC803-30D2VC3	Vdet-IC	3.0V±2.5%, -Reset ODO, 20ms	SC-70	16vdc	VD7	3a	Mcr
AV	cb	MIC803-30D2VM3	Vdet-IC	3.0V±2.5%, -Reset ODO, 20ms	SOT-23	16vdc	VD7	3a	Mcr
AVA	-	AME8500CEETBE42	Vdet-IC	4.2V±1.5%, -Reset ODO, 150ms	SOT-23	16vda	VD6	3b	Ame
AVA	-	BC858UA	Si-pnp	GP, 30V, 100mA, 200mW, B=110..220, 150MHz	SOT-323	16ta	-	3a	Auk
AVA	-	BC858UFA	Si-pnp	GP, 30V, 100mA, 200mW, B=110..220, 150MHz	SOT-323F	18ta	-	3a	Auk
AVA	cm	AME8500CEETBE42Z	Vdet-IC	4.2V±1.5%, -Reset ODO, 150ms, lead free	SOT-23	16vda	VD6	3b	Ame
AVB	-	AME8500AEETCA27	Vdet-IC	2.7V±1.5%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3b	Ame
AVB	-	BC858UB	Si-pnp	GP, 30V, 100mA, 200mW, B=200..450, 150MHz	SOT-323	16ta	-	3a	Auk
AVB	-	BC858UFB	Si-pnp	GP, 30V, 100mA, 200mW, B=200..450, 150MHz	SOT-323F	18ta	-	3a	Auk
AVB	cm	AME8500AEETCA27Z	Vdet-IC	2.7V±1.5%, +Reset PPO, 1.5ms, lead free	SOT-23	16vdc	VD7	3b	Ame
AVC	-	AME8500AEETCA46	Vdet-IC	4.63V±1.5%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3b	Ame
AVC	-	BC858UC	Si-pnp	GP, 30V, 100mA, 200mW, B=420..800, 150MHz	SOT-323	16ta	-	3a	Auk
AVC	-	BC858UFC	Si-pnp	GP, 30V, 100mA, 200mW, B=420..800, 150MHz	SOT-323F	18ta	-	3a	Auk
AVC	cm	AME8500AEETCA46Z	Vdet-IC	4.63V±1.5%, +Reset PPO, 1.5ms, lead free	SOT-23	16vdc	VD7	3b	Ame
AVD	-	AME8500BEETBA22	Vdet-IC	2.2V±1.5%, -Reset ODO, 1.5ms	SOT-23	16vdb	VD6	3b	Ame
AVD	cm	AME8500BEETBA22Z	Vdet-IC	2.2V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-23	16vdb	VD6	3b	Ame
AVG	-	AME8500AEETAE21	Vdet-IC	2.1V±1.5%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3b	Ame
AVG	cm	AME8500AEETAE21Z	Vdet-IC	2.1V±1.5%, -Reset PPO, 150ms, lead free	SOT-23	16vdc	VD7	3b	Ame
AVQ	-	AME8500BEETBA25	Vdet-IC	2.50V±1.5%, -Reset ODO, 1.5ms	SOT-23	16vdb	VD6	3b	Ame
AVQ	cm	AME8500BEETBA25Z	Vdet-IC	2.50V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-23	16vdb	VD6	3b	Ame
AVY	-	AME8500CEETBF31	Vdet-IC	3.08V±1.5%, -Reset ODO, 210ms	SOT-23	16vda	VD6	3b	Ame
AVY	cm	AME8500CEETBF31Z	Vdet-IC	3.08V±1.5%, -Reset ODO, 210ms, lead free	SOT-23	16vda	VD6	3b	Ame
aW	-	BU45K382G	Vdet-IC	3.8V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
AW	-	BCW60HR	Si-npn	GP, 32V, 200mA, 250mW, B=380..630, 250MHz	SOT-23	16te	-	3a	Fer
AW	-	BCX70GR	Si-npn	AF, 45V, 200mA, 330mW, B=120..220, >250MHz	SOT-23	16ta	-	3a	Zx
AW	-	BCX70RH	Si-npn	GP, 45V, 200mA, 250mW, B=180..310, >100MHz	SOT-23	16ta	-	3a	Sie
AW	-	GS6333UR21D1	Vdet-IC	2.1V±1.8%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
AW	-	RT9161-50CV	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AW	-	SiP6333R21D1	Vdet-IC	2.1V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
AW-	-	RT9161-50PV	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
AWH	-	AME8550AEETA220Y	Vdet-IC	2.2V±2%, -Reset PPO	TSOT-23	16vdb	VD7	3b	Ame
AWH	-	AME8550AEETA220Z	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3b	Ame
AWH	cm	AME8550AEETA220L	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3b	Ame
AWI	-	AME8550AEETA270Y	Vdet-IC	2.7V±2%, -Reset PPO	TSOT-23	16vdb	VD7	3b	Ame
AWI	-	AME8550AEETA270Z	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3b	Ame
AWI	cm	AME8550AEETA270L	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3b	Ame
AWU	-	AME8550AEETB220Y	Vdet-IC	2.2V±2%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
AWU	-	AME8550AEETB220Z	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
AWU	cm	AME8550AEETB220L	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
AWV	-	AME8550AEETB270Y	Vdet-IC	2.7V±2%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
AWV	-	AME8550AEETB270Z	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
AWV	cm	AME8550AEETB270L	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
AWX	-	AME8500AEETBE20	Vdet-IC	2.0V±1.5%, -Reset ODO, 150ms	SOT-23	16vdc	VD6	3b	Ame
AWX	cm	AME8500AEETBE20Z	Vdet-IC	2.0V±1.5%, -Reset ODO, 150ms, lead free	SOT-23	16vdc	VD6	3b	Ame
aX	-	BU45K392G	Vdet-IC	3.9V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
AX	-	50A02CH	Si-pnp	AF, GP, 50V, 500mA, 700mW, B=200..500, 690MHz	CPH3	16ta	-	3a	San
AX	-	BCX70JR	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=250..460, >100MHz	SOT-23	16ta	-	3a	Zx
AX	-	BCX70RJ	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=250..460, >100MHz	SOT-23	16ta	-	3a	Sie
AX	-	GS6333UR21D2	Vdet-IC	2.1V±1.8%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
AX	-	RT9809-49CV	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
AX	-	SiP6333R21D2	Vdet-IC	2.1V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
AX	cb	MIC803-30D3VC3	Vdet-IC	3.0V±2.5%, -Reset ODO, 140ms	SC-70	16vdc	VD7	3a	Mcr
AX	cb	MIC803-30D3VM3	Vdet-IC	3.0V±2.5%, -Reset ODO, 140ms	SOT-23	16vdc	VD7	3a	Mcr
AXL	-	AME8500CEETBA26	Vdet-IC	2.63V±1.5%, -Reset ODO, 1.5ms	SOT-23	16vda	VD6	3b	Ame
AXL	cm	AME8500CEETBA26Z	Vdet-IC	2.63V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-23	16vda	VD6	3b	Ame
AXQ	-	2SA1739-Q	Si-pnp	Sw, Hi-speed, 15V, 50mA, 150mW, B=50..120, 1.5GHz	SOT-323	16ta	-	3a	Pan
AXQ	-	AME8550AEETB210Y	Vdet-IC	2.1V±2%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
AXQ	-	AME8550AEETB210Z	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AXQ	cm	AME8550AEETB210L	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
AXR	-	2SA1739-R	Si-pnp	Sw, Hi-speed, 15V, 50mA, 150mW, B=90..150, 1.5GHz	SOT-323	16ta	-	3a	Pan
AXT	-	AME8550AEETA240Y	Vdet-IC	2.4V±2%, -Reset PPO	TSOT-23	16vdb	VD7	3b	Ame
AXT	-	AME8550AEETA240Z	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3b	Ame
AXT	cm	AME8550AEETA240L	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3b	Ame
AXV	-	AME8550AEETB240Y	Vdet-IC	2.4V±2%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
AXV	-	AME8550AEETB240Z	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
AXV	cm	AME8550AEETB240L	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
AXZ	-	AME8550AEETB250Y	Vdet-IC	2.5V±2%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
AXZ	-	AME8550AEETB250Z	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
AXZ	cm	AME8550AEETB250L	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
aY	-	BU45K402G	Vdet-IC	4.0V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Ay	-	BD48K36G	Vdet-IC	3.6V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
AY	-	2SA1979UF-Y	Si-pnp	AF, 40V, 500mA, 200mW, B=120..240, 200MHz	SOT-323F	18ta	-	3a	Auk
AY	-	2SA1979U-Y	Si-pnp	AF, 40V, 500mA, 200mW, B=120..240, 200MHz	SOT-323	16ta	-	3a	Auk
AY	-	2SA1980EF-Y	Si-pnp	GP, 50V, 150mA, 150mW, B=120..240, 80MHz	SOT-523F	18ta	-	3a	Auk
AY	-	2SA1980E-Y	Si-pnp	GP, 50V, 150mA, 150mW, B=120..240, 80MHz	SOT-523	16ta	-	3a	Auk
AY	-	2SC4210-Y	Si-npn	AF, 35V, 800mA, 200mW, B=160..320, 120MHz	SC-59	16ta	-	3a	Tos
AY	-	BCX70KR	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=380..630, >100MHz	SOT-23	16te	-	3a	Itt
AY	-	BCX70RK	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=380..630, >100MHz	SOT-23	16ta	-	3a	Sie
AY	-	GS6333UR21D3	Vdet-IC	2.1V±1.8%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
AY	-	MMBD1000	Si-diode	Sw, 30V, 200mA, 225mW, Vf<0.95V(10mA), <2pF	SOT-23	16dc	-	3a	Mot
AY	-	MMBZ5239B	Z-diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 350mW	SOT-23	16dc	-	3c	Jiy
AY	-	SiP6333R21D3	Vdet-IC	2.1V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
AY4	-	2SC3392-4	Si-npn	Sw, Hi-Sp, 60V, 500mA, 200mW, 300MHz, B=100..200	SOT-23	16ta	-	3a	San
AY5	-	2SC3392-5	Si-npn	Sw, Hi-Sp, 60V, 500mA, 200mW, 300MHz, B=140..280	SOT-23	16ta	-	3a	San
AY6	-	2SC3392-6	Si-npn	Sw, Hi-Sp, 60V, 500mA, 200mW, 300MHz, B=200..400	SOT-23	16ta	-	3a	San
AY7	-	2SC3392-7	Si-npn	Sw, Hi-Sp, 60V, 500mA, 200mW, 300MHz, B=280..560	SOT-23	16ta	-	3a	San
AYB	-	AME8550AEETB280Y	Vdet-IC	2.8V±2%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
AYB	-	AME8550AEETB280Z	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
AYB	cm	AME8550AEETB280L	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
AYF	-	AME8550AEETA300Y	Vdet-IC	3.0V±2%, -Reset PPO	TSOT-23	16vdb	VD7	3b	Ame
AYF	-	AME8550AEETA300Z	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3b	Ame
AYF	cm	AME8550AEETA300L	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3b	Ame
AYH	-	AME8550AEETB340Y	Vdet-IC	3.4V±2%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
AYH	-	AME8550AEETB340Z	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
AYH	cm	AME8550AEETB340L	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
AYL	-	AME8550AEETB440Y	Vdet-IC	4.4V±2%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
AYL	-	AME8550AEETB440Z	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
AYL	cm	AME8550AEETB440L	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
AYR	-	AME8500AEETBF44	Vdet-IC	4.38V±1.5%, -Reset ODO, 210ms	SOT-23	16vdc	VD6	3b	Ame
AYR	cm	AME8500AEETBF44Z	Vdet-IC	4.38V±1.5%, -Reset ODO, 210ms, lead free	SOT-23	16vdc	VD6	3b	Ame
AZ	-	GS6333UR22D1	Vdet-IC	2.2V±1.8%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
AZ	-	MMBZ5240B	Z-diode	10V±5%, Izt=20mA, Zzt=17Ω, 350mW	SOT-23	16dc	-	3c	Jiy
AZ	-	RT9809-50CV	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
AZ	-	SiP6333R22D1	Vdet-IC	2.2V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
AZ	cb	MIC803-30D4VC3	Vdet-IC	3.0V±2.5%, -Reset ODO, 1120ms	SC-70	16vdc	VD7	3a	Mcr
AZ	cb	MIC803-30D4VM3	Vdet-IC	3.0V±2.5%, -Reset ODO, 1120ms	SOT-23	16vdc	VD7	3a	Mcr
AZG	-	AME8500BEETBA35	Vdet-IC	3.50V±1.5%, -Reset ODO, 1.5ms	SOT-23	16vdb	VD6	3b	Ame
AZG	-	KTA1505S-GR	Si-pnp	GP, 35V, 500mA, 150mW, B=200..400, 200MHz	SOT-23	16ta	-	3f	Kec
AZG	cm	AME8500BEETBA35Z	Vdet-IC	3.50V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-23	16vdb	VD6	3b	Ame
AZM	-	AME8500AEETCF26	Vdet-IC	2.63V±1.5%, +Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
AZM	cm	AME8500AEETCF26Z	Vdet-IC	2.63V±1.5%, +Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
AZO	-	KTA1505S-O	Si-pnp	GP, 35V, 500mA, 150mW, B=70..140, 200MHz	SOT-23	16ta	-	3f	Kec
AZY	-	KTA1505S-Y	Si-pnp	GP, 35V, 500mA, 150mW, B=120..240, 200MHz	SOT-23	16ta	-	3f	Kec
b	-	AX6901BA	Vdet-IC	4.38V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Axl
b	-	CH3904TPT	Si-npn	AF, Sw, 40V, 200mA, B=100..300, 300MHz	SOT-416	16ta	-	3a	Chm
B	-	CMBT3904E	Si-npn	GP, 60V, 600mA, 100mW, B=100..100, 300MHz	SOT-923	19ta	-	3k	Cen
B	-	NT353	Si-npn-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1/R2=10k/10k	SOT-923	19ta	-	3k	Auk
B	-	Si1013X	p-MOSFET	T-FET, Sw, 20V, 275mA, 250mW, <1.2Ω(350mA), 5/35ns	SC-89	16fh	-	3a	Six
B	cr	ELM7523NEB	Vdet-IC	2.3V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
B	cs	ELM7523CEB	Vdet-IC	2.3V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
B•W	-	2SC6046	Si-npn	GP, Drv, 75V, 600mA, 200mW, 250MHz, B=100..300	SC-59	16ta	-	3a	Ish
B0	-	AP8821C-10GC	Vdet-IC	1.0V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
B0	-	AP8821C-10GT	Vdet-IC	1.0V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
B0	-	AP8821C-10PC	Vdet-IC	1.0V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
B0	-	AP8821C-10PT	Vdet-IC	1.0V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
B0	-	BZX84C47	Z-diode	44..50V, Zzt=170Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
B0	-	ELM9710NBB	Vdet-IC	1.0V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
B0	-	HSMS-2810	Si-diode	Schottky, RF, 20V, 1A, Vf<0.4V(1mA), <1.2pF, 15Ω(5mA)	SOT-23	16dc	-	3a	Agi



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B0	-	HSMS-281B	Si-diode	Schottky, RF, 20V, 1A, Vf<0.4V(1mA), <1.2pF, 15Ω(5mA)	SOT-323	16dc	-	3a	Agi
B0	-	R3111N102A	Vdet-IC	1V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
B0	-	R3113D201A	Vdet-IC	2V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
B0	-	R3130N20EC	Vdet-IC	2V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
B0	-	SST5460	p-FET	GP, LN, 40V, 350mW, Idss=1..5mA	SOT-23	16fj	-	3a	Vs
B03	-	XC61CC1002M	Vdet-IC	1.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
B1	-	2SC4931-1	Si-npn	VHF/UHF, LN, 16V, 50mA, 100mW, B=60..120, 9GHz	SMCP	16ta	-	3a	San
B1	-	2SK1824	n-MOSFET	V-MOS, LogL, 30V, ±0.1A, <8Ω(10mA)	SOT-23	16fh	-	3a	Nec
B1	-	AP1772B-33GX	LVR-IC	LDO, 3.3V±2%, 300mA, Halogen-free	SC-70	16cg	VR1	3bb	Anw
B1	-	AP1772B-33PX	LVR-IC	LDO, 3.3V±2%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
B1	-	AP8821C-11GC	Vdet-IC	1.1V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
B1	-	AP8821C-11GT	Vdet-IC	1.1V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
B1	-	AP8821C-11PC	Vdet-IC	1.1V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
B1	-	AP8821C-11PT	Vdet-IC	1.1V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
B1	-	BAS40LT1	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dc	-	3a	Ons
B1	-	BAS70GP	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dc	-	3a	Chm
B1	-	ELM9711NBB	Vdet-IC	1.1V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
B1	-	R3111N112A	Vdet-IC	1.2V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
B1	-	R3113D211A	Vdet-IC	2.1V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
B1	-	R3130N21EC	Vdet-IC	2.1V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
B1	-	RT9169-12CV	LVR-IC	LDO, 1.2V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
B1	-	SST5461	p-FET	GP, LN, 40V, 350mW, Idss=2..9mA	SOT-23	16fj	-	3a	Vs
B1	cc	AP1772B-33GC	LVR-IC	LDO, 3.3V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
B1	cc	AP1772B-33PC	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3bc	Anw
B1	cu	AP1772B-33GX1	LVR-IC	LDO, 3.3V±1%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
B1	cu	AP1772B-33PX1	LVR-IC	LDO, 3.3V±1%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
B1	dd	AP1772B-33GC1	LVR-IC	LDO, 3.3V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
B1	dd	AP1772B-33PC1	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-23	16cg	VR1	3bc	Anw
B1-	-	RT9169-12PV	LVR-IC	LDO, 1.2V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
B10	-	2SK1068-10	n-FET	Impedance conv, 40V, 1mA, 100mW, Idss=30..80µA, Up<4V	MCP	16fa	-	3a	San
B10	-	2SK545-10	n-FET	Impedance-conv, 40V, 10mA, 125mW, Idss=30..80µA	SOT-23	16fa	-	3a	San
B11	-	2SK1068-11	n-FET	Impedance conv, 40V, 1mA, 100mW, Idss=60..180µA, Up<4V	MCP	16fa	-	3a	San
B11	-	2SK545-11	n-FET	Impedance-conv, 40V, 10mA, 125mW, Idss=60..180µA	SOT-23	16fa	-	3a	San
B11A	-	ML6101N113M	Vdet-IC	1.1V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B12	-	2SC3739-12	Si-npn	HF, Sw, 60V, 500mA, 200mW, 400MHz, B=75..150	SOT-23	16ta	-	3a	Nec
B12	-	2SC4173-12	Si-npn	Sw, 60V, 500mA, 150mW, B=75..150, >200MHz	SOT-323	16ta	-	3a	Nec
B12	-	2SK1068-12	n-FET	Impedance conv, 40V, 1mA, 100mW, Idss=150..300µA, Up<4V	MCP	16fa	-	3a	San
B12	-	2SK545-12	n-FET	Impedance-conv, 40V, 10mA, 125mW, Idss=150..300µA	SOT-23	16fa	-	3a	San
B12	-	LN6206P122MR	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B12A	-	ML6101N123M	Vdet-IC	1.2V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B13	-	2SC3739-13	Si-npn	HF, Sw, 60V, 500mA, 200mW, 400MHz, B=100..200	SOT-23	16ta	-	3a	Nec
B13	-	2SC4173-13	Si-npn	Sw, 60V, 500mA, 150mW, B=100..200, >200MHz	SOT-323	16ta	-	3a	Nec
B13	-	LN6206P132MR	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B13	-	XC61CC1102M	Vdet-IC	1.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
B13A	-	ML6101N133M	Vdet-IC	1.3V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B14	-	2SC3739-14	Si-npn	HF, Sw, 60V, 500mA, 200mW, 400MHz, B=150..300	SOT-23	16ta	-	3a	Nec
B14	-	2SC4173-14	Si-npn	Sw, 60V, 500mA, 150mW, B=150..300, >200MHz	SOT-323	16ta	-	3a	Nec
B14	-	LN6206P142MR	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B14A	-	ML6101N143M	Vdet-IC	1.4V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B15	-	LN6206P152MR	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B15	-	NTM2222A	Si-npn	GP, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Nec
B15A	-	ML6101N153M	Vdet-IC	1.5V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B16	-	LN6206P162MR	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B16A	-	ML6101N163M	Vdet-IC	1.6V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B17	-	LN6206P172MR	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B17A	-	ML6101N173M	Vdet-IC	1.7V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B18	-	LN6206P182MR	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B18A	-	ML6101N183M	Vdet-IC	1.8V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B19	-	LN6206P192MR	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B19A	-	ML6101N193M	Vdet-IC	1.9V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B1O	-	KSC2715-O	Si-npn	AF, 35V, 50mA, 150mW, B=70..140.>150MHz	SOT-23	16ta	-	3a	Sam
B1R	-	KSC2715-R	Si-npn	AF, 35V, 50mA, 150mW, B=40..80, >150MHz	SOT-23	16ta	-	3a	Sam
B1Y	-	KSC2715-Y	Si-npn	AF, 35V, 50mA, 150mW, B =120..240, >150MHz	SOT-23	16ta	-	3a	Sam
B2	-	2SC1621-2	Si-npn	Sw, 40V, 200mA, 200mW, 500MHz, B=40..80	SOT-23	16ta	-	3a	Nec
B2	-	2SC4175-2	Si-npn	Sw, 40V, 200mA, 150mW, B=40..80, 12/18ns	SOT-323	16ta	-	3a	Nec
B2	-	2SC4931-2	Si-npn	VHF/UHF, LN, 16V, 50mA, 100mW, B=90..180, 9GHz	SMCP	16ta	-	3a	San
B2	-	AP8821C-12GC	Vdet-IC	1.2V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
B2	-	AP8821C-12GT	Vdet-IC	1.2V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
B2	-	AP8821C-12PC	Vdet-IC	1.2V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
B2	-	AP8821C-12PT	Vdet-IC	1.2V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B2	-	BAS70AGP	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16df	-	3a	Chm
B2	-	BSV52	Si-npn	Sw, 20/12V, 100mA, 250mW, B=40..120, 500MHz	SOT-23	16ta	-	3a	Zx
B2	-	ELM9712NBB	Vdet-IC	1.2V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
B2	-	HSMS-2812	Si-diode	Dual, Schottky, RF, 20V, 1A, Vf<0.4V(1mA), <1.2pF, 15Ω(5mA)	SOT-23	16dl	-	3a	Agi
B2	-	HSMS-281C	Si-diode	Dual, Schottky, RF, 20V, 1A, Vf<0.4V(1mA), <1.2pF, 15Ω(5mA)	SOT-323	16dl	-	3a	Agi
B2	-	R3111N122A	Vdet-IC	1.2V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
B2	-	R3113D221A	Vdet-IC	2.2V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
B2	-	R3130N22EC	Vdet-IC	2.2V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
B2	-	RT9169-13CV	LVR-IC	LDO, 1.3V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
B2	-	SST5462	p-FET	GP, LN, 40V, 350mW, Idss=4..16mA	SOT-23	16fj	-	3a	Vs
B20	-	LN6206P202MR	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B20A	-	ML6101N202M	Vdet-IC	2.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B21	-	LN6206P212MR	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B21A	-	ML6101N212M	Vdet-IC	2.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B22	-	2SC3734-22	Si-npn	Sw, 40V, 200mA, 200mW, B=75..150, >200MHz	SOT-23	16ta	-	3a	Nec
B22	-	LN6206P222MR	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B22A	-	ML6101N222M	Vdet-IC	2.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B23	-	2SC3734-23	Si-npn	Sw, 40V, 200mA, 200mW, B=100..200, >200MHz	SOT-23	16ta	-	3a	Nec
B23	-	LN6206P232MR	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B23	-	XC61CC1202M	Vdet-IC	1.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
B23A	-	ML6101N232M	Vdet-IC	2.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B24	-	2SC3734-24	Si-npn	Sw, 40V, 200mA, 200mW, B=150..300, >200MHz	SOT-23	16ta	-	3a	Nec
B24	-	LN6206P242MR	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B24A	-	ML6101N242M	Vdet-IC	2.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B25	-	LN6206P252MR	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B25	-	NTM3904	Si-npn	GP, 60V, 0.1A, 200mW, B= 100..300, >300MHz	SOT-23	16ta	-	3a	Nec
B25A	-	ML6101N252M	Vdet-IC	2.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B26	-	BF570	Si-npn	TV-IF-Pre, 40V, 200mA, 250mW, B>40, >490MHz	SOT-23	16ta	-	3a	Phi
B26	-	LN6206P262MR	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B26A	-	ML6101N262M	Vdet-IC	2.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B27	-	LN6206P272MR	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B27A	-	ML6101N272M	Vdet-IC	2.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B28	-	LN6206P282MR	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B28A	-	ML6101N282M	Vdet-IC	2.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B29	-	LN6206P292MR	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B29A	-	ML6101N292M	Vdet-IC	2.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B2C	-	KIC3201T-12	LVR-IC	LDO, 1.2V±2%, 400mA	TSM	16cg	VR1	3f	Kec
B2p	-	BSV52	Si-npn	Sw, 20/12V, 100mA, 250mW, B=40..120, 500MHz	SOT-23	16ta	-	3a	PhH
B2t	-	BSV52	Si-npn	Sw, 20/12V, 100mA, 250mW, B=40..120, 500MHz	SOT-23	16ta	-	3a	PhM
B2W	-	BSV52	Si-npn	Sw, 20/12V, 100mA, 250mW, B=40..120, 500MHz	SOT-23	16ta	-	3a	PhC
B3	-	1PS301	Si-diode	Dual, Sw, Fast, 85V, 80mA, <4ns	SOT-323	16dg	-	3a	Phi
B3	-	1SS184	Si-diode	Dual, Sw, U-Fst, 85V, 100mA, 150mW, Vf<1.2V(100mA), <4ns	SC-59	16dg	-	3a	Tos
B3	-	1SS301	Si-diode	Dual, 80V, 100mA, VF<1.2V(100mA), <4ns	SOT-323	16dg	-	3a	Tos
B3	-	1SS361	Si-diode	Dual, Sw, U-Fast, 85V, 100mA, 150mW, Vf<1.2V(0.1A), <4ns	SOT-23	18dg	-	3a	Tos
B3	-	1SS361F	Si-diode	Dual, Sw, U-Fast, 85V, 100mA, 150mW, Vf<1.2V(0.1A), <4ns	SOT-23F	16dg	-	3a	Tos
B3	-	2SC1621-3	Si-npn	Sw, 40V, 200mA, 200mW, 500MHz, B=60..120	SOT-23	16ta	-	3a	Nec
B3	-	2SC4175-3	Si-npn	Sw, 40V, 200mA, 150mW, B=60..120, 12/18ns	SOT-323	16ta	-	3a	Nec
B3	-	2SC4931-3	Si-npn	VHF/UHF, LN, 16V, 50mA, 100mW, B=135..270, 9GHz	SMCP	16ta	-	3a	San
B3	-	AP1772B-105GX	LVR-IC	LDO, 1.05V±2%, 300mA, Halogen-free	SC-70	16cg	VR1	3bb	Anw
B3	-	AP1772B-105PX	LVR-IC	LDO, 1.05V±2%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
B3	-	AP432W	Vref-IC	Adjustable, Precision, Shunt, 1.24V±1%	SOT-23-3L	16rc	RF1	3a	Ana
B3	-	AP8821C-13GC	Vdet-IC	1.3V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
B3	-	AP8821C-13GT	Vdet-IC	1.3V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
B3	-	AP8821C-13PC	Vdet-IC	1.3V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
B3	-	AP8821C-13PT	Vdet-IC	1.3V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
B3	-	BAS70CGP	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dg	-	3a	Chm
B3	-	ELM9713NBB	Vdet-IC	1.3V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
B3	-	HSMS-2813	Si-diode	Dual, Schottky, RF, 20V, 1A, Vf<0.4V(1mA), <1.2pF, 15Ω(5mA)	SOT-23	16df	-	3a	Agi
B3	-	HSMS-281E	Si-diode	Dual, Schottky, RF, 20V, 1A, Vf<0.4V(1mA), <1.2pF, 15Ω(5mA)	SOT-323	16df	-	3a	Agi
B3	-	MMBD717	Si-diode	Dual, Sw, 20V, 20mA, Vf<0.37V(1mA), <2.5pF	SOT-323	16df	-	3a	Ons
B3	-	R3111N132A	Vdet-IC	1.3V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
B3	-	R3113D231A	Vdet-IC	2.3V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
B3	-	R3130N23EC	Vdet-IC	2.3V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
B3	-	RT9169-14CV	LVR-IC	LDO, 1.4V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
B3	-	TWT4148C-121F5	Si-diode	Dual, Sw, 85V, 100mA, Vf<1.2V(100mA), 4pF	F5T	18dg	-	3a	Ttr
B3	-	TWT4148C-121WT	Si-diode	Dual, Sw, 85V, 100mA, Vf<1.2V(100mA), 4pF	SOT-523	18dg	-	3a	Ttr
B3	cc	AP1772B-105GC	LVR-IC	LDO, 1.05V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
B3	cc	AP1772B-105PC	LVR-IC	LDO, 1.05V±2%, 300mA	SOT-23	16cg	VR1	3bc	Anw
B3	cu	AP1772B-105GX1	LVR-IC	LDO, 1.05V±1%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
B3	cu	AP1772B-105PX1	LVR-IC	LDO, 1.05V±1%, 300mA	SC-70-3	16cg	VR1	3bc	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B3	dd	AP1772B-105GC1	LVR-IC	LDO, 1.05V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
B3	dd	AP1772B-105PC1	LVR-IC	LDO, 1.05V±1%, 300mA	SOT-23	16cg	VR1	3bc	Anw
B30	-	LN6206P302MR	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B30A	-	ML6101N302M	Vdet-IC	3.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B31	-	LN6206P311MR	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B31A	-	ML6101N312M	Vdet-IC	3.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B32	-	LN6206P322MR	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B32A	-	ML6101N322M	Vdet-IC	3.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B33	-	2SC3735-33	Si-npn	Sw, 15V, 50mA, 200mW, B=50..100, >800MHz	SOT-23	16ta	-	3a	Nec
B33	-	2SC4176-33	Si-npn	Sw, 40V, 200mA, 150mW, B=40..80, >500MHz	SOT-323	16ta	-	3a	Nec
B33	-	LN6206P332MR	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B33	-	XC61CC1302M	Vdet-IC	1.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
B33A	-	ML6101N332M	Vdet-IC	3.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B34	-	2SC3735-34	Si-npn	Sw, 15V, 50mA, 200mW, B=75..150, >800MHz	SOT-23	16ta	-	3a	Nec
B34	-	2SC4176-34	Si-npn	Sw, 40V, 200mA, 150mW, B=60..120, >500MHz	SOT-323	16ta	-	3a	Nec
B34	-	LN6206P342MR	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B34A	-	ML6101N342M	Vdet-IC	3.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B35	-	2SC3735-35	Si-npn	Sw, 15V, 50mA, 200mW, B=100..200, >800MHz	SOT-23	16ta	-	3a	Nec
B35	-	2SC4176-35	Si-npn	Sw, 40V, 200mA, 150mW, B=90..180, >500MHz	SOT-323	16ta	-	3a	Nec
B35	-	LN6206P352MR	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B35A	-	ML6101N352M	Vdet-IC	3.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B36	-	LN6206P362MR	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B36A	-	ML6101N362M	Vdet-IC	3.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B37	-	LN6206P372MR	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B37A	-	ML6101N372M	Vdet-IC	3.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B38	-	LN6206P382MR	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B38A	-	ML6101N382M	Vdet-IC	3.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B39	-	LN6206P392MR	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B39A	-	ML6101N392M	Vdet-IC	3.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B3C	-	KIC3201T-13	LVR-IC	LDO, 1.3V±2%, 400mA	TSM	16cg	VR1	3f	Kec
B3T	-	1PS184	Si-diode	Dual, Hi-Speed, 85V, 215mA, 250mW, <1.5pF, <4ns	SC-59	16dg	-	3a	Phi
B4	-	2SC1621-4	Si-npn	Sw, 40V, 200mA, 200mW, 500MHz, B=90..180	SOT-23	16ta	-	3a	Nec
B4	-	2SC4175-4	Si-npn	Sw, 40V, 200mA, 150mW, B=90..180, 12/18ns	SOT-323	16ta	-	3a	Nec
B4	-	2SC4987-4	Si-npn	Sw, Hi-Sp, 40V, 200mA, 150mW, B=50..100, 750MHz	SMCP	16ta	-	3a	San
B4	-	AP1772B-10GX	LVR-IC	LDO, 1.0V±2%, 300mA, Halogen-free	SC-70	16cg	VR1	3bb	Anw
B4	-	AP1772B-10PX	LVR-IC	LDO, 1.0V±2%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
B4	-	AP432AW	Vref-IC	Adjustable, Precision, Shunt, 1.24V±0.5%	SOT-23-3L	16rc	RF1	3a	Ana
B4	-	AP8821C-14GC	Vdet-IC	1.4V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
B4	-	AP8821C-14GT	Vdet-IC	1.4V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
B4	-	AP8821C-14PC	Vdet-IC	1.4V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
B4	-	AP8821C-14PT	Vdet-IC	1.4V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
B4	-	BAS70SGP	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dl	-	3a	Chm
B4	-	BAT54W	Si-diode	SBR, 30V, 200mA, Vf<0.52V(100mA), <5ns	SOT-323	16dc	-	3a	Ons
B4	-	BB404B	C-diode	Dual, 10V, 44.5..24.8pF(2..8V), 100MHz	SOT-23	16dg	-	3a	Itt
B4	-	BSV52R	Si-npn	Sw, 20/12V, 100mA, 250mW, B=40..120, 500MHz	SOT-23	16te	-	3a	Zx
B4	-	ELM9714NBB	Vdet-IC	1.4V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
B4	-	HSMS-2814	Si-diode	Dual, Schottky, RF, 20V, 1A, Vf<0.4V(1mA), <1.2pF, 15Ω(5mA)	SOT-23	16dg	-	3a	Agi
B4	-	HSMS-281F	Si-diode	Dual, Schottky, RF, 20V, 1A, Vf<0.4V(1mA), <1.2pF, 15Ω(5mA)	SOT-323	16dg	-	3a	Agi
B4	-	KA4F4M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/22k	SOT-416	16ta	-	3a	Nec
B4	-	R3111N142A	Vdet-IC	1.4V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
B4	-	R3113D241A	Vdet-IC	2.4V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
B4	-	R3130N24EC	Vdet-IC	2.4V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
B4	-	RT9169-15CV	LVR-IC	LDO, 1.5V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
B4	-	TC54VC1402ECB	Vdet-IC	1.4V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
B4	cc	AP1772B-10GC	LVR-IC	LDO, 1.0V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
B4	cc	AP1772B-10PC	LVR-IC	LDO, 1.0V±2%, 300mA	SOT-23	16cg	VR1	3bc	Anw
B4	cu	AP1772B-10GX1	LVR-IC	LDO, 1.0V±1%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
B4	cu	AP1772B-10PX1	LVR-IC	LDO, 1.0V±1%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
B4	dd	AP1772B-10GC1	LVR-IC	LDO, 1.0V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
B4	dd	AP1772B-10PC1	LVR-IC	LDO, 1.0V±1%, 300mA	SOT-23	16cg	VR1	3bc	Anw
B40	-	LN6206P402MR	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B40A	-	ML6101N402M	Vdet-IC	4.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B41	-	LN6206P412MR	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B41A	-	ML6101N412M	Vdet-IC	4.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B42	-	2SB1475-42	Si-pnp	AF, 25V, 500mA, 150mW, B=110..240, >50MHz	SOT-323	16ta	-	3a	Nec
B42	-	LN6206P422MR	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B42A	-	ML6101N422M	Vdet-IC	4.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B43	-	2SB1475-43	Si-pnp	AF, 25V, 500mA, 150mW, B=190..320, >50MHz	SOT-323	16ta	-	3a	Nec
B43	-	LN6206P432MR	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B43	-	XC61CC1402M	Vdet-IC	1.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B43A	-	ML6101N432M	Vdet-IC	4.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B44	-	2SB1475-44	Si-pnp	AF, 25V, 500mA, 150mW, B=270..400, >50MHz	SOT-323	16ta	-	3a	Nec
B44	-	LN6206P442MR	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B44A	-	ML6101N442M	Vdet-IC	4.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B45	-	LN6206P452MR	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B45A	-	ML6101N452M	Vdet-IC	4.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B46	-	BAT46S	Si-diode	Dual, SBD, 100V, 150mA, Vf<1V(250mA), 6pF	SOT-23	16dl	-	3b	Ste
B46	-	BAT46SW	Si-diode	Dual, SBD, 100V, 150mA, Vf<1V(250mA), 6pF	SOT-323	16dl	-	3b	Ste
B46	-	LN6206P462MR	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B46A	-	ML6101N462M	Vdet-IC	4.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B47	-	LN6206P472MR	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B47A	-	ML6101N472M	Vdet-IC	4.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B48	-	LN6206P482MR	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B48A	-	ML6101N482M	Vdet-IC	4.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B49	-	LN6206P492MR	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B49A	-	ML6101N492M	Vdet-IC	4.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B4C	-	KIC3201T-14	LVR-IC	LDO, 1.4V±2%, 400mA	TSM	16cg	VR1	3f	Kec
B5	-	2SC4987-5	Si-npn	Sw, Hi-Sp, 40V, 200mA, 150mW, B=70..140, 750MHz	SMCP	16ta	-	3a	San
B5	-	AP1772B-12GX	LVR-IC	LDO, 1.2V±2%, 300mA, Halogen-free	SC-70	16cg	VR1	3bb	Anw
B5	-	AP1772B-12PX	LVR-IC	LDO, 1.2V±2%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
B5	-	AP432R	Vref-IC	Adjustable, Precision, Shunt, 1.24V±1%	SOT-23-3L	16rd	RF1	3a	Ana
B5	-	AP8821C-15GC	Vdet-IC	1.5V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
B5	-	AP8821C-15GT	Vdet-IC	1.5V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
B5	-	AP8821C-15PC	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
B5	-	AP8821C-15PT	Vdet-IC	1.5V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
B5	-	ELM9715NBB	Vdet-IC	1.5V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
B5	-	R3111N152A	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
B5	-	R3113D251A	Vdet-IC	2.5V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
B5	-	R3130N25EC	Vdet-IC	2.5V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
B5	-	RT9169-16CV	LVR-IC	LDO, 1.6V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
B5	-	SP809NEK-4-4	Vdet-IC	4.4V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Sip
B5	-	TC54VC1502ECB	Vdet-IC	1.5V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
B5	cc	AP1772B-12GC	LVR-IC	LDO, 1.2V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
B5	cc	AP1772B-12PC	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3bc	Anw
B5	cu	AP1772B-12GX1	LVR-IC	LDO, 1.2V±1%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
B5	cu	AP1772B-12PX1	LVR-IC	LDO, 1.2V±1%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
B5	dd	AP1772B-12GC1	LVR-IC	LDO, 1.2V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
B5	dd	AP1772B-12PC1	LVR-IC	LDO, 1.2V±1%, 300mA	SOT-23	16cg	VR1	3bc	Anw
B50	-	LN6206P502MR	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Inw
B50A	-	ML6101N502M	Vdet-IC	5.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B51	-	2SB736A-51	Si-pnp	AF, 80V, 300mA, 200mW, B=110..180, 100MHz	SOT-23	16ta	-	3a	Nec
B51A	-	ML6101N512M	Vdet-IC	5.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B52	-	2SB736A-52	Si-pnp	AF, 80V, 300mA, 200mW, B=135..220, 100MHz	SOT-23	16ta	-	3a	Nec
B52A	-	ML6101N522M	Vdet-IC	5.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B53	-	2SB736A-53	Si-pnp	AF, 80V, 300mA, 200mW, B=170..270, 100MHz	SOT-23	16ta	-	3a	Nec
B53	-	XC61CC1502M	Vdet-IC	1.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
B53A	-	ML6101N532M	Vdet-IC	5.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B54	-	2SB736A-54	Si-pnp	AF, 80V, 300mA, 200mW, B=200..320, 100MHz	SOT-23	16ta	-	3a	Nec
B54A	-	ML6101N542M	Vdet-IC	5.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B55	-	2SB736A-55	Si-pnp	AF, 80V, 300mA, 200mW, B=250..400, 100MHz	SOT-23	16ta	-	3a	Nec
B55A	-	ML6101N552M	Vdet-IC	5.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B56A	-	ML6101N562M	Vdet-IC	5.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B57A	-	ML6101N572M	Vdet-IC	5.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B58A	-	ML6101N582M	Vdet-IC	5.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B59A	-	ML6101N592M	Vdet-IC	5.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B5C	-	KIC3201T-15	LVR-IC	LDO, 1.5V±2%, 400mA	TSM	16cg	VR1	3f	Kec
B5p	-	BSR12	Si-pnp	Sw, 15V, 100mA, 250mW, B=30..120, >1.5GHz	SOT-23	16ta	-	3a	Phi
B5s	-	BBY58-05W	C-diode	Dual ,Tuning, VCO, 10V, 20mA, 17.5..19.3pF(4/1V)	SOT-323	16dg	-	3c	Inf
B6	-	2SB815-6	Si-pnp	AF-Amp, 20V, 700mA, 200mW, B=200..400, 250MHz	SOT-23	16ta	-	3a	San
B6	-	2SC4987-6	Si-npn	Sw, Hi-Sp, 40V, 200mA, 150mW, B=100..200, 750MHz	SMCP	16ta	-	3a	San
B6	-	AP432AR	Vref-IC	Adjustable, Precision, Shunt, 1.24V±0.5%	SOT-23-3L	16rd	RF1	3a	Ana
B6	-	AP8821C-16GC	Vdet-IC	1.6V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
B6	-	AP8821C-16GT	Vdet-IC	1.6V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
B6	-	AP8821C-16PC	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
B6	-	AP8821C-16PT	Vdet-IC	1.6V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
B6	-	BAT54A	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<0.52V(0.1A), <5ns	SOT-23	16df	-	3a	Ons
B6	-	ELM9716NBB	Vdet-IC	1.6V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
B6	-	R3111N162A	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
B6	-	R3113D261A	Vdet-IC	2.6V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
B6	-	R3130N26EC	Vdet-IC	2.6V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B6	-	RT9169-17CV	LVR-IC	LDO, 1.7V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
B6	-	TC54VC1602ECB	Vdet-IC	1.6V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
B60A	-	ML6101N602M	Vdet-IC	6.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
B63	-	XC61CC1602M	Vdet-IC	1.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
B63	-	XE61CC1645MR	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
B65	-	LN61FC1612M	Vdet-IC	1.6V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
B65	-	XC61FC1612M	Vdet-IC	1.6V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
B65	-	XC61HC1612MR	Vdet-IC	1.6V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
B66	-	LN61FC1642M	Vdet-IC	1.6V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
B66	-	XC61FC1642M	Vdet-IC	1.6V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
B66	-	XC61HC1642MR	Vdet-IC	1.6V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
B67	-	LN61FC1652M	Vdet-IC	1.6V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
B67	-	XC61FC1652M	Vdet-IC	1.6V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
B67	-	XC61HC1652MR	Vdet-IC	1.6V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
B6C	-	KIC3201T-16	LVR-IC	LDO, 1.6V±2%, 400mA	TSM	16cg	VR1	3f	Kec
B6s	-	BBY58-06W	C-diode	Dual ,Tuning, VCO, 10V, 20mA, 17.5..19.3pF(4/1V)	SOT-323	16df	-	3c	Inf
B7	-	2SB815-7	Si-pnp	AF-Amp, 20V, 700mA, 200mW, B=300..400, 250MHz	SOT-23	16ta	-	3a	San
B7	-	AP8821C-17GC	Vdet-IC	1.7V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
B7	-	AP8821C-17GT	Vdet-IC	1.7V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
B7	-	AP8821C-17PC	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
B7	-	AP8821C-17PT	Vdet-IC	1.7V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
B7	-	ELM9717NBB	Vdet-IC	1.7V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
B7	-	KN4F4M	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1/R2=22k/22k	SOT-416	16ta	-	3a	Nec
B7	-	R3111N172A	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
B7	-	R3113D271A	Vdet-IC	2.7V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
B7	-	R3130N27EC	Vdet-IC	2.7V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
B7	-	RT9169-18CV	LVR-IC	LDO, 1.8V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
B7	-	TC54VC1702ECB	Vdet-IC	1.7V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
B7-	-	RT9169-18PV	LVR-IC	LDO, 1.8V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
B73	-	XC61CC1702M	Vdet-IC	1.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
B73	-	XE61CC1745MR	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
B75	-	LN61FC1712M	Vdet-IC	1.7V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
B75	-	XC61FC1712M	Vdet-IC	1.7V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
B75	-	XC61HC1712MR	Vdet-IC	1.7V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
B76	-	LN61FC1742M	Vdet-IC	1.7V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
B76	-	XC61FC1742M	Vdet-IC	1.7V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
B76	-	XC61HC1742MR	Vdet-IC	1.7V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
B77	-	LN61FC1752M	Vdet-IC	1.7V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
B77	-	XC61FC1752M	Vdet-IC	1.7V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
B77	-	XC61HC1752MR	Vdet-IC	1.7V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
B7C	-	KIC3201T-17	LVR-IC	LDO, 1.7V±2%, 400mA	TSM	16cg	VR1	3f	Kec
B8	-	AO3438	n-MOSFET	Sw-PWM, 20V, 3A, 1.4W, Rds=62mΩ(4.5V), 2.5/21ns	SOT-23	16fh	-	3n	Aom
B8	-	AP1772B-15GX	LVR-IC	LDO, 1.5V±2%, 300mA, Halogen-free	SC-70	16cg	VR1	3bb	Anw
B8	-	AP1772B-15PX	LVR-IC	LDO, 1.5V±2%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
B8	-	AP8821C-18GC	Vdet-IC	1.8V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
B8	-	AP8821C-18GT	Vdet-IC	1.8V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
B8	-	AP8821C-18PC	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
B8	-	AP8821C-18PT	Vdet-IC	1.8V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
B8	-	BAT54SW	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<0.52V(100mA), <5ns	SOT-323	16dl	-	3a	Ons
B8	-	CH0420LSPT	Si-diode	Dual, SBD, 20V, 400mA, Vf<0.43V(500mA)	SOT-23	16dl	-	3a	Chm
B8	-	ELM9718NBB	Vdet-IC	1.8V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
B8	-	R3111N182A	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
B8	-	R3113D281A	Vdet-IC	2.8V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
B8	-	R3130N28EC	Vdet-IC	2.8V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
B8	-	RT9169-19CV	LVR-IC	LDO, 1.9V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
B8	-	TC54VC1802ECB	Vdet-IC	1.8V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
B8	cb	AO3438	n-MOSFET	Sw-PWM, 20V, 3A, 1.4W, Rds=62mΩ(4.5V), 2.5/21ns	SOT-23	16fh	-	3n	Aom
B8	cc	AP1772B-15GC	LVR-IC	LDO, 1.5V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
B8	cc	AP1772B-15PC	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3bc	Anw
B8	cu	AP1772B-15GX1	LVR-IC	LDO, 1.5V±1%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
B8	cu	AP1772B-15PX1	LVR-IC	LDO, 1.5V±1%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
B8	dd	AP1772B-15GC1	LVR-IC	LDO, 1.5V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
B8	dd	AP1772B-15PC1	LVR-IC	LDO, 1.5V±1%, 300mA	SOT-23	16cg	VR1	3bc	Anw
B81	-	BSR12R	Si-pnp	Sw, 15V, 100mA, 250mW, B=30..120, >1.5GHz	SOT-23	16te	-	3a	Phi
B83	-	XC61CC1802M	Vdet-IC	1.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
B83	-	XE61CC1845MR	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
B85	-	LN61FC1812M	Vdet-IC	1.8V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
B85	-	XC61FC1812M	Vdet-IC	1.8V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
B85	-	XC61HC1812MR	Vdet-IC	1.8V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
B86	-	LN61FC1842M	Vdet-IC	1.8V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B86	-	XC61FC1842M	Vdet-IC	1.8V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
B86	-	XC61HC1842MR	Vdet-IC	1.8V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
B87	-	LN61FC1852M	Vdet-IC	1.8V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
B87	-	XC61FC1852M	Vdet-IC	1.8V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
B87	-	XC61HC1852MR	Vdet-IC	1.8V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
B8C	-	KIC3201T-18	LVR-IC	LDO, 1.8V±2%, 400mA	TSM	16cg	VR1	3f	Kec
B9	-	1SS311	Si-diode	Sw, 420V, 100mA, 1.5µs	SOT-23	16dr	-	3a	Tos
B9	-	1SS397	Si-diode	Rectifier, 420V, 100mA, 500ns	SOT-323	16dr	-	3a	Tos
B9	-	2SC4617	Si-npn	GP, 50V, 100mA, 150mW, B=120..560, 180MHz	SOT-416	16ta	-	3a	Ons
B9	-	AP8821C-19GC	Vdet-IC	1.9V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
B9	-	AP8821C-19GT	Vdet-IC	1.9V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
B9	-	AP8821C-19PC	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
B9	-	AP8821C-19PT	Vdet-IC	1.9V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
B9	-	BZX84C10	Z-diode	9.4..10.6V, Zzt=20Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
B9	-	ELM9719NBB	Vdet-IC	1.9V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
B9	-	R3111N192A	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
B9	-	R3113D291A	Vdet-IC	2.9V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
B9	-	R3130N29EC	Vdet-IC	2.9V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
B9	-	RT9169-20CV	LVR-IC	LDO, 2.0V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
B9	-	TC54VC1902ECB	Vdet-IC	1.9V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
B93	-	XC61CC1902M	Vdet-IC	1.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
B93	-	XE61CC1945MR	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
B95	-	LN61FC1912M	Vdet-IC	1.9V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
B95	-	XC61FC1912M	Vdet-IC	1.9V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
B95	-	XC61HC1912MR	Vdet-IC	1.9V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
B96	-	LN61FC1942M	Vdet-IC	1.9V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
B96	-	XC61FC1942M	Vdet-IC	1.9V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
B96	-	XC61HC1942MR	Vdet-IC	1.9V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
B97	-	LN61FC1952M	Vdet-IC	1.9V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
B97	-	XC61FC1952M	Vdet-IC	1.9V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
B97	-	XC61HC1952MR	Vdet-IC	1.9V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
B9C	-	KIC3201T-19	LVR-IC	LDO, 1.9V±2%, 400mA	TSM	16cg	VR1	3f	Kec
bA	-	BU45K412G	Vdet-IC	4.1V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Ba	-	BD48K37G	Vdet-IC	3.7V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
BA	-	1SS154	Si-diode	Schottky, UHF-S-Band Mix/Det., 6V, 30mA, <0.8pF(1MHz)	SC-59	16dr	-	3a	Tos
BA	-	2SA1865	Si-pnp-Digi	Mute, 15V, 100mA, 150mW, 600MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	San
BA	-	AP1772B-18GX	LVR-IC	LDO, 1.8V±2%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BA	-	AP1772B-18PX	LVR-IC	LDO, 1.8V±2%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BA	-	BAS40GP	Si-diode	SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-23	16dc	-	3a	Chm
BA	-	BCW61A	Si-pnp	GP, 32V, 200mA, 330mW, B=120..220, >180MHz	SOT-23	16ta	-	3a	All
BA	-	DAN217	Si-diode	Dual, U-Sp, 80V, 100mA, Vf<1.2V(100mA), 0.5pF, 4ns	SMD3	16dl	-	3i	Rhm
BA	-	GS6333UR22D2	Vdet-IC	2.2V±1.8%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
BA	-	MMBZ5241B	Z-diode	11V±5%, Izt=20mA, Zzt=22Ω, 350mW	SOT-23	16dc	-	3c	Jiy
BA	-	RT9169-21CV	LVR-IC	LDO, 2.1V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BA	-	SiP6333R22D2	Vdet-IC	2.2V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
BA	cc	AP1772B-18GC	LVR-IC	LDO, 1.8V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BA	cc	AP1772B-18PC	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BA	cu	AP1772B-18GX1	LVR-IC	LDO, 1.8V±1%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BA	cu	AP1772B-18PX1	LVR-IC	LDO, 1.8V±1%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BA	dd	AP1772B-18GC1	LVR-IC	LDO, 1.8V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BA	dd	AP1772B-18PC1	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BA1	-	BZX84C2V4ET1	Z-diode	2.2..2.6V, Zzt=100Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BA1	cn	BZX84C2V4ET1G	Z-diode	2.2..2.6V, Zzt=100Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BA2	-	BZX84C2V7ET1	Z-diode	2.5..2.9V, Zzt=100Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BA2	cn	BZX84C2V7ET1G	Z-diode	2.5..2.9V, Zzt=100Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BA3	-	BZX84C3V0ET1	Z-diode	2.8..3.2V, Zzt=95Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BA3	cn	BZX84C3V0ET1G	Z-diode	2.8..3.2V, Zzt=95Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BA4	-	BZX84C3V3ET1	Z-diode	3.1..3.5V, Zzt=95Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BA4	cn	BZX84C3V3ET1G	Z-diode	3.1..3.5V, Zzt=95Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BA5	-	BZX84C3V6ET1	Z-diode	3.4..3.8V, Zzt=90Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BA5	cn	BZX84C3V6ET1G	Z-diode	3.4..3.8V, Zzt=90Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BA6	-	BZX84C3V9ET1	Z-diode	3.7..4.1V, Zzt=90Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BA6	cn	BZX84C3V9ET1G	Z-diode	3.7..4.1V, Zzt=90Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BA7	-	BZX84C4V3ET1	Z-diode	4.0..4.6V, Zzt=90Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BA7	cn	BZX84C4V3ET1G	Z-diode	4.0..4.6V, Zzt=90Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BA9	-	BZX84C4V7ET1	Z-diode	4.4..5.0V, Zzt=80Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BA9	cn	BZX84C4V7ET1G	Z-diode	4.4..5.0V, Zzt=80Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BAH	-	A1015LT1-H	Si-pnp	GP, 50V, 150mA, 200mW, >80MHz, B=200..400	SOT-23	16ta	-	3a	Wtr
BAL	-	A1015LT1-L	Si-pnp	GP, 50V, 150mA, 200mW, >80MHz, B=130..200	SOT-23	16ta	-	3a	Wtr
BAL	-	AME8500AEETBE18	Vdet-IC	1.80V±1.5%, -Reset ODO, 150ms	SOT-23	16vdc	VD6	3b	Ame



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BAL	cm	AME8500AEETBE18Z	Vdet-IC	1.80V±1.5%, -Reset ODO, 150ms, lead free	SOT-23	16vdc	VD6	3b	Ame
BAM	-	AME8500AEETBD18	Vdet-IC	1.80V±1.5%, -Reset ODO, 30ms	SOT-23	16vdc	VD6	3b	Ame
BAM	cm	AME8500AEETBD18Z	Vdet-IC	1.80V±1.5%, -Reset ODO, 30ms, lead free	SOT-23	16vdc	VD6	3b	Ame
BAO	-	2SC5342SF-Q	Si-npn	AF, 40V, 500mA, 200mW, B=70..140, 200MHz	SOT-23F	18ta	-	3a	Auk
BAO	-	2SC5342S-Q	Si-npn	AF, 40V, 500mA, 200mW, B=70..140, 200MHz	SOT-23	16ta	-	3a	Auk
BAp	-	BCW61A	Si-pnp	GP, 32V, 200mA, 250mW, B=120..220, >100MHz	SOT-23	16ta	-	3a	PhH
BAs	-	BCW61A	Si-pnp	GP, 32V, 100mA, 330mW, B=120..220, 250MHz	SOT-23	16ta	-	3a	Sie
BAt	-	BCW61A	Si-pnp	GP, 32V, 200mA, 250mW, B=120..220, >100MHz	SOT-23	16ta	-	3a	PhM
BAU	-	AME8500AEETAE23	Vdet-IC	2.32V±1.5%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3b	Ame
BAU	cm	AME8500AEETAE23Z	Vdet-IC	2.32V±1.5%, -Reset PPO, 150ms, lead free	SOT-23	16vdc	VD7	3b	Ame
BAW	-	BCW61A	Si-pnp	GP, 32V, 200mA, 250mW, B=120..220, >100MHz	SOT-23	16ta	-	3a	PhC
BAX	-	AME8500CEETBE31	Vdet-IC	3.08V±1.5%, -Reset ODO, 150ms	SOT-23	16vda	VD6	3b	Ame
BAX	cm	AME8500CEETBE31Z	Vdet-IC	3.08V±1.5%, -Reset ODO, 150ms, lead free	SOT-23	16vda	VD6	3b	Ame
BAY	-	2SC5342SF-Y	Si-npn	AF, 40V, 500mA, 200mW, B=120..240, 200MHz	SOT-23F	18ta	-	3a	Auk
BAY	-	2SC5342S-Y	Si-npn	AF, 40V, 500mA, 200mW, B=120..240, 200MHz	SOT-23	16ta	-	3a	Auk
bB	-	BU45K422G	Vdet-IC	4.2V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Bb	-	BD48K38G	Vdet-IC	3.8V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
BB	-	1SV128	PIN-diode	VHF/UHF, AGC, 50V, 0.05A, 0.25pF	SOT-23	16dc	-	3a	Tos
BB	-	2SB831-B	Si-pnp	AF-Amp, 25V, 700mA, 150mW, B=85..170	MPAK	16ta	-	3a	Hit
BB	-	BAS40AGP	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-23	16df	-	3a	Chm
BB	-	BCW61B	Si-pnp	GP, 32V, 200mA, 330mW, B=180..310, >180MHz	SOT-23	16ta	-	3a	All
BB	-	EP1201W15	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-23	16cg	VR1	3ba	Eor
BB	-	GS6333UR22D3	Vdet-IC	2.2V±1.8%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
BB	-	MMBZ5242B	Z-diode	12V±5%, Izt=20mA, Zzt=30Ω, 350mW	SOT-23	16dc	-	3c	Jiy
BB	-	RT9169-22CV	LVR-IC	LDO, 2.2V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BB	-	SiP6333R22D3	Vdet-IC	2.2V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
BB1	-	BZX84C5V1ET1	Z-diode	4.8..5.4V, Zzt=60Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BB1	cn	BZX84C5V1ET1G	Z-diode	4.8..5.4V, Zzt=60Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BB2	-	BZX84C5V6ET1	Z-diode	5.2..6.0V, Zzt=40Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BB2	cn	BZX84C5V6ET1G	Z-diode	5.2..6.0V, Zzt=40Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BB3	-	BZX84C6V2ET1	Z-diode	5.8..6.6V, Zzt=10Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BB3	cn	BZX84C6V2ET1G	Z-diode	5.8..6.6V, Zzt=10Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BB3Z	-	DTB113ZL-AE3	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=1k/10k	SOT-23	16ta	-	3a	Utc
BB3Z	df	DTB113ZG-AE3	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, R1/R2=1k/10k, Halogen free	SOT-23	16ta	-	3a	Utc
BB4	-	BZX84C6V8ET1	Z-diode	6.4..7.2V, Zzt=15Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BB4	cn	BZX84C6V8ET1G	Z-diode	6.4..7.2V, Zzt=15Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BB4E	-	DTB114EL-AE3	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	Utc
BB4E	-	DTB114EL-AL3	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-323	16ta	-	3a	Utc
BB4E	df	DTB114EG-AE3	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, R1/R2=10k/10k, Halogen free	SOT-23	16ta	-	3a	Utc
BB4E	df	DTB114EG-AL3	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, R1/R2=10k/10k, Halogen free	SOT-323	16ta	-	3a	Utc
BB5	-	BZX84C7V5ET1	Z-diode	7.0..7.9V, Zzt=15Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BB5	cn	BZX84C7V5ET1G	Z-diode	7.0..7.9V, Zzt=15Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BB6	-	BZX84C8V2ET1	Z-diode	7.7..8.7V, Zzt=15Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BB6	cn	BZX84C8V2ET1G	Z-diode	7.7..8.7V, Zzt=15Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BB7	-	BZX84C9V1ET1	Z-diode	8.5..9.6V, Zzt=15Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BB7	cn	BZX84C9V1ET1G	Z-diode	8.5..9.6V, Zzt=15Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BB8	-	BZX84C10ET1	Z-diode	9.4..10.6V, Zzt=20Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BB8	cn	BZX84C10ET1G	Z-diode	9.4..10.6V, Zzt=20Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BB9	-	BZX84C11ET1	Z-diode	10.4..11.6V, Zzt=20Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BB9	cn	BZX84C11ET1G	Z-diode	10.4..11.6V, Zzt=20Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BBD	-	AME8500BEETBE21	Vdet-IC	2.10V±1.5%, -Reset ODO, 150ms	SOT-23	16vdb	VD6	3b	Ame
BBD	-	KTC9012S-D	Si-pnp	GP, Sw, 40V, 500mA, 350mW, B=64..91, >150MHz	SOT-23	16ta	-	3f	Kec
BBD	cm	AME8500BEETBE21Z	Vdet-IC	2.10V±1.5%, -Reset ODO, 150ms, lead free	SOT-23	16vdb	VD6	3b	Ame
BBE	-	KTC9012S-E	Si-pnp	GP, Sw, 40V, 500mA, 350mW, B=68..112, >150MHz	SOT-23	16ta	-	3f	Kec
BBF	-	KTC9012S-F	Si-pnp	GP, Sw, 40V, 500mA, 350mW, B=95..135, >150MHz	SOT-23	16ta	-	3f	Kec
BBG	-	KTC9012S-G	Si-pnp	GP, Sw, 40V, 500mA, 350mW, B=118..166, >150MHz	SOT-23	16ta	-	3f	Kec
BBH	-	KTC9012S-H	Si-pnp	GP, Sw, 40V, 500mA, 350mW, B=144..202, >150MHz	SOT-23	16ta	-	3f	Kec
BBI	-	KTC9012S-I	Si-pnp	GP, Sw, 40V, 500mA, 350mW, B=176..246, >150MHz	SOT-23	16ta	-	3f	Kec
BBp	-	BCW61B	Si-pnp	GP, 32V, 200mA, 250mW, B=180..310, >100MHz	SOT-23	16ta	-	3a	PhH
BBs	-	BCW61B	Si-pnp	GP, 32V, 100mA, 330mW, B=180..310, 250MHz	SOT-23	16ta	-	3a	Sie
BBt	-	BCW61B	Si-pnp	GP, 32V, 200mA, 250mW, B=180..310, >100MHz	SOT-23	16ta	-	3a	PhM
BBU	-	2SD2114K-U	Si-npn	AF, 25V, 500mA, 200mW, B=560..1200, >350MHz	SOT-346	16ta	-	3a	Rhm
BBV	-	2SD2114K-V	Si-npn	AF, 25V, 500mA, 200mW, B=820..1800, >350MHz	SOT-346	16ta	-	3a	Rhm
BBW	-	2SD2114K-W	Si-npn	AF, 25V, 500mA, 200mW, B=1200..2700, >350MHz	SOT-346	16ta	-	3a	Rhm
BBW	-	BCW61B	Si-pnp	GP, 32V, 200mA, 250mW, B=180..310, >100MHz	SOT-23	16ta	-	3a	PhC
bC	-	BU45K432G	Vdet-IC	4.3V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Bc	-	BD48K39G	Vdet-IC	3.9V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
BC	-	2SB831-C	Si-pnp	AF-Amp, 25V, 700mA, 150mW, B=120..240	MPAK	16ta	-	3a	Hit
BC	-	AP432IW	Vref-IC	Adjustable, Precision, Shunt, 1.24V±1%	SOT-23-3L	16rc	RF1	3a	Ana
BC	-	BAS40CGP	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-23	16dg	-	3a	Chm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BC	-	BCW61C	Si-pnp	GP, 32V, 200mA, 330mW, B=250..460, >180MHz	SOT-23	16ta	-	3a	All
BC	-	EP1201W18	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-23	16cg	VR1	3ba	Eor
BC	-	GS6333UR23D1	Vdet-IC	2.3V±1.8%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
BC	-	MMBZ5243B	Z-diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 350mW	SOT-23	16dc	-	3c	Jiy
BC	-	PT7M7803LT	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD7	3b	Pti
BC	-	RT9169-23CV	LVR-IC	LDO, 2.3V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BC	-	SiP6333R23D1	Vdet-IC	2.3V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
BC	cu	PT7M7803LTE	Vdet-IC	4.63V±1.5%, -Reset ODO, Lead free	SOT-23	16vdc	VD7	3b	Pti
BC1	-	BZX84C12ET1	Z-diode	11.4..12.7V, Zzt=25Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BC1	cn	BZX84C12ET1G	Z-diode	11.4..12.7V, Zzt=25Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BC2	-	BZX84C13ET1	Z-diode	12.4..14.1V, Zzt=30Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BC2	cn	BZX84C13ET1G	Z-diode	12.4..14.1V, Zzt=30Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BC3	-	BZX84C15ET1	Z-diode	13.8..15.6V, Zzt=30Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BC3	cn	BZX84C15ET1G	Z-diode	13.8..15.6V, Zzt=30Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BC3Y	-	DTB123YL-AE3	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	Utc
BC3Y	-	DTB123YL-AL3	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=2.2k/10k	SOT-323	16ta	-	3a	Utc
BC3Y	df	DTB123YG-AE3	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, R1/R2=2.2k/10k, Halogen free	SOT-23	16ta	-	3a	Utc
BC3Y	df	DTB123YG-AL3	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, R1/R2=2.2k/10k, Halogen free	SOT-323	16ta	-	3a	Utc
BC4	-	BZX84C16ET1	Z-diode	15.3..17.1V, Zzt=40Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BC4	cn	BZX84C16ET1G	Z-diode	15.3..17.1V, Zzt=40Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BC5	-	BZX84C18ET1	Z-diode	16.8..19.1V, Zzt=45Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BC5	cn	BZX84C18ET1G	Z-diode	16.8..19.1V, Zzt=45Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BC6	-	BZX84C20ET1	Z-diode	18.8..21.2V, Zzt=55Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BC6	cn	BZX84C20ET1G	Z-diode	18.8..21.2V, Zzt=55Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BC7	-	BZX84C22ET1	Z-diode	20.8..23.3V, Zzt=55Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BC7	cn	BZX84C22ET1G	Z-diode	20.8..23.3V, Zzt=55Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BC8	-	BZX84C24ET1	Z-diode	22.8..25.6V, Zzt=70Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BC8	cn	BZX84C24ET1G	Z-diode	22.8..25.6V, Zzt=70Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BC9	-	BZX84C27ET1	Z-diode	25.1..28.9V, Zzt=80Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BC9	cn	BZX84C27ET1G	Z-diode	25.1..28.9V, Zzt=80Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BCD	-	KTC9013S-D	Si-npn	GP, Sw, 40V, 500mA, 350mW, B=64..91, >140MHz	SOT-23	16ta	-	3f	Kec
BCE	-	KTC9013S-E	Si-npn	GP, Sw, 40V, 500mA, 350mW, B=68..112, >140MHz	SOT-23	16ta	-	3f	Kec
BCF	-	KTC9013S-F	Si-npn	GP, Sw, 40V, 500mA, 350mW, B=95..135, >140MHz	SOT-23	16ta	-	3f	Kec
BCG	-	AME8500AEETBF16	Vdet-IC	1.60V±1.5%, -Reset ODO, 210ms	SOT-23	16vdc	VD6	3b	Ame
BCG	-	KTC9013S-G	Si-npn	GP, Sw, 40V, 500mA, 350mW, B=118..166, >140MHz	SOT-23	16ta	-	3f	Kec
BCG	cm	AME8500AEETBF16Z	Vdet-IC	1.60V±1.5%, -Reset ODO, 210ms, lead free	SOT-23	16vdc	VD6	3b	Ame
BCH	-	AME8500AEETAA16	Vdet-IC	1.60V±1.5%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3b	Ame
BCH	-	KTC9013S-H	Si-npn	GP, Sw, 40V, 500mA, 350mW, B=144..202, >140MHz	SOT-23	16ta	-	3f	Kec
BCH	cm	AME8500AEETAA16Z	Vdet-IC	1.60V±1.5%, -Reset PPO, 1.5ms, lead free	SOT-23	16vdc	VD7	3b	Ame
BCI	-	KTC9013S-I	Si-npn	GP, Sw, 40V, 500mA, 350mW, B=176..246, >140MHz	SOT-23	16ta	-	3f	Kec
BCp	-	BCW61C	Si-pnp	GP, 32V, 200mA, 250mW, B=250..460, >100MHz	SOT-23	16ta	-	3a	PhH
BCP	-	AME8500CEETAE40	Vdet-IC	4.0V±1.5%, -Reset PPO, 150ms	SOT-23	16vda	VD7	3b	Ame
BCP	cm	AME8500CEETAE40Z	Vdet-IC	4.0V±1.5%, -Reset PPO, 150ms, lead free	SOT-23	16vda	VD7	3b	Ame
BCQ	-	AME8500CEETAE28	Vdet-IC	2.80V±1.5%, -Reset PPO, 150ms	SOT-23	16vda	VD7	3b	Ame
BCQ	cm	AME8500CEETAE28Z	Vdet-IC	2.80V±1.5%, -Reset PPO, 150ms, lead free	SOT-23	16vda	VD7	3b	Ame
BCR	-	AME8500CEETAE24	Vdet-IC	2.40V±1.5%, -Reset PPO, 150ms	SOT-23	16vda	VD7	3b	Ame
BCR	cm	AME8500CEETAE24Z	Vdet-IC	2.40V±1.5%, -Reset PPO, 150ms, lead free	SOT-23	16vda	VD7	3b	Ame
BCs	-	BCW61C	Si-pnp	GP, 32V, 100mA, 330mW, B=250..460, 250MHz	SOT-23	16ta	-	3a	Sie
BCS	-	AME8500AEETDE40	Vdet-IC	4.0V±1.5%, +Reset ODO, 150ms	SOT-23	16vdc	VD6	3b	Ame
BCS	cm	AME8500AEETDE40Z	Vdet-IC	4.0V±1.5%, +Reset ODO, 150ms, lead free	SOT-23	16vdc	VD6	3b	Ame
BCt	-	BCW61C	Si-pnp	GP, 32V, 200mA, 250mW, B=250..460, >100MHz	SOT-23	16ta	-	3a	PhM
BCT	-	AME8500AEETDF27	Vdet-IC	2.70V±1.5%, +Reset ODO, 210ms	SOT-23	16vdc	VD6	3b	Ame
BCT	cm	AME8500AEETDF27Z	Vdet-IC	2.70V±1.5%, +Reset ODO, 210ms, lead free	SOT-23	16vdc	VD6	3b	Ame
BCU	-	AME8500AEETDF28	Vdet-IC	2.80V±1.5%, +Reset ODO, 210ms	SOT-23	16vdc	VD6	3b	Ame
BCU	cm	AME8500AEETDF28Z	Vdet-IC	2.80V±1.5%, +Reset ODO, 210ms, lead free	SOT-23	16vdc	VD6	3b	Ame
BCV	-	AME8500AEETDF30	Vdet-IC	3.0V±1.5%, +Reset ODO, 210ms	SOT-23	16vdc	VD6	3b	Ame
BCV	cm	AME8500AEETDF30Z	Vdet-IC	3.0V±1.5%, +Reset ODO, 210ms, lead free	SOT-23	16vdc	VD6	3b	Ame
BCW	-	BCW61C	Si-pnp	GP, 32V, 200mA, 250mW, B=250..460, >100MHz	SOT-23	16ta	-	3a	PhC
bD	-	BU45K442G	Vdet-IC	4.4V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Bd	-	BD48K40G	Vdet-IC	4.0V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
BD	-	1SS271	Si-diode	Dual, Schottky, VHF/UHF, 6V, 30mA, Vf<0.55V(10mA), <1pF	SOT-23	16ea	-	3a	Tos
BD	-	AP1772B-20GX	LVR-IC	LDO, 2.0V±2%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BD	-	AP1772B-20PX	LVR-IC	LDO, 2.0V±2%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BD	-	AP432IAW	Vref-IC	Adjustable, Precision, Shunt, 1.24V±0.5%	SOT-23-3L	16rc	RF1	3a	Ana
BD	-	BAS40SGP	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-23	16dl	-	3a	Chm
BD	-	EP1201W25	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-23	16cg	VR1	3ba	Eor
BD	-	GS6333UR23D2	Vdet-IC	2.3V±1.8%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
BD	-	PT7M7803MT	Vdet-IC	4.26V±1.5%, -Reset ODO	SOT-23	16vdc	VD7	3b	Pti
BD	-	RT9169-24CV	LVR-IC	LDO, 2.4V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BD	-	SiP6333R23D2	Vdet-IC	2.3V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BD	cc	AP1772B-20GC	LVR-IC	LDO, 2.0V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BD	cc	AP1772B-20PC	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BD	cu	AP1772B-20GX1	LVR-IC	LDO, 2.0V±1%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BD	cu	AP1772B-20PX1	LVR-IC	LDO, 2.0V±1%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BD	cu	PT7M7803MTE	Vdet-IC	4.26V±1.5%, -Reset ODO, Lead free	SOT-23	16vdc	VD7	3b	Pti
BD	dd	AP1772B-20GC1	LVR-IC	LDO, 2.0V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BD	dd	AP1772B-20PC1	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BD1	-	BZX84C30ET1	Z-diode	28..32V, Zzt=80Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BD1	cn	BZX84C30ET1G	Z-diode	28..32V, Zzt=80Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BD2	-	BZX84C33ET1	Z-diode	31..35V, Zzt=80Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BD2	cn	BZX84C33ET1G	Z-diode	31..35V, Zzt=80Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BD3	-	BZX84C36ET1	Z-diode	34..38V, Zzt=90Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BD3	cn	BZX84C36ET1G	Z-diode	34..38V, Zzt=90Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BD4	-	BZX84C39ET1	Z-diode	37..41V, Zzt=130Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BD4	cn	BZX84C39ET1G	Z-diode	37..41V, Zzt=130Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BD5	-	BZX84C47ET1	Z-diode	44..50V, Zzt=170Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BD5	cn	BZX84C47ET1G	Z-diode	44..50V, Zzt=170Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BD6	-	BZX84C51ET1	Z-diode	48..54V, Zzt=180Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BD6	cn	BZX84C51ET1G	Z-diode	48..54V, Zzt=180Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BD7	-	BZX84C56ET1	Z-diode	52..60V, Zzt=200Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BD7	cn	BZX84C56ET1G	Z-diode	52..60V, Zzt=200Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BD8	-	BZX84C62ET1	Z-diode	58..66V, Zzt=215Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BD8	cn	BZX84C62ET1G	Z-diode	58..66V, Zzt=215Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BD9	-	BZX84C68ET1	Z-diode	64..72V, Zzt=240Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BD9	cn	BZX84C68ET1G	Z-diode	64..72V, Zzt=240Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BDB	-	AME88004EET	LVR-IC	LDO, 4.0V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
BDB	-	AME88004EETL	LVR-IC	LDO, 4.0V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
BDB	cm	AME88004EETY	LVR-IC	LDO, 4.0V±1.5%, 300mA	TSOT-23	16cq	VR1	3b	Ame
BDB	cm	AME88004EETZ	LVR-IC	LDO, 4.0V±1.5%, 300mA	SOT-23	16cq	VR1	3b	Ame
BDC	-	AME8500CEETAE31	Vdet-IC	3.08V±1.5%, -Reset PPO, 150ms	SOT-23	16vda	VD7	3b	Ame
BDC	cm	AME8500CEETAE31Z	Vdet-IC	3.08V±1.5%, -Reset PPO, 150ms, lead free	SOT-23	16vda	VD7	3b	Ame
BDD	-	KTC9014S-D	Si-npn	GP, Sw, 50V, 150mA, 350mW, B=64..91, >60MHz	SOT-23	16ta	-	3f	Kec
BDE	-	KTC9014S-E	Si-npn	GP, Sw, 50V, 150mA, 350mW, B=68..112, >60MHz	SOT-23	16ta	-	3f	Kec
BDF	-	KTC9014S-F	Si-npn	GP, Sw, 50V, 150mA, 350mW, B=95..135, >60MHz	SOT-23	16ta	-	3f	Kec
BDG	-	KTC9014S-G	Si-npn	GP, Sw, 50V, 150mA, 350mW, B=118..166, >60MHz	SOT-23	16ta	-	3f	Kec
BDH	-	KTC9014S-H	Si-npn	GP, Sw, 50V, 150mA, 350mW, B=144..202, >60MHz	SOT-23	16ta	-	3f	Kec
BDI	-	KTC9014S-I	Si-npn	GP, Sw, 50V, 150mA, 350mW, B=176..246, >60MHz	SOT-23	16ta	-	3f	Kec
BDK	-	AME8550AEETA390Y	Vdet-IC	3.9V±2%, -Reset PPO	TSOT-23	16vdb	VD7	3b	Ame
BDK	-	AME8550AEETA390Z	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3b	Ame
BDK	cm	AME8550AEETA390L	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3b	Ame
BDM	-	2SA1733K-M	Si-pnp	Sw, 30V, 30mA, 200mW, B=39..82, >400MHz	SOT-346	16ta	-	3a	Rhm
BDM	-	2SA1808-M	Si-pnp	RF, 30V, 30mA, 200mW, B=39..82, >400MHz	SOT-323	16ta	-	3a	Rhm
BDM	-	2SA1821-M	Si-pnp	HF, 20V, 30mA, 150mW, >400MHz, B=39..82	SC-75A	16ta	-	3a	Rhm
BDM	-	AME8550AEETB330Z	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BDM	cm	AME8550AEETB330L	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BDN	-	2SA1733K-N	Si-pnp	Sw, 30V, 30mA, 200mW, B=56..120, >400MHz	SOT-346	16ta	-	3a	Rhm
BDN	-	2SA1808-N	Si-pnp	RF, 30V, 30mA, 200mW, B=56..120, >400MHz	SOT-323	16ta	-	3a	Rhm
BDN	-	2SA1821-N	Si-pnp	HF, 20V, 30mA, 150mW, >400MHz, B=56..120	SC-75A	16ta	-	3a	Rhm
BDN	-	AME8500AEETBD29	Vdet-IC	2.93V±1.5%, -Reset ODO, 30ms	SOT-23	16vdc	VD6	3b	Ame
BDN	cm	AME8500AEETBD29Z	Vdet-IC	2.93V±1.5%, -Reset ODO, 30ms, lead free	SOT-23	16vdc	VD6	3b	Ame
BDO	-	AME8500CEETBF29	Vdet-IC	2.93V±1.5%, -Reset ODO, 210ms	SOT-23	16vda	VD6	3b	Ame
BDO	cm	AME8500CEETBF29Z	Vdet-IC	2.93V±1.5%, -Reset ODO, 210ms, lead free	SOT-23	16vda	VD6	3b	Ame
BDp	-	BCW61D	Si-pnp	GP, 32V, 200mA, 250mW, B=380..630, >100MHz	SOT-23	16ta	-	3a	PhH
BDP	-	2SA1733K-P	Si-pnp	Sw, 30V, 30mA, 200mW, B=82..180, >400MHz	SOT-346	16ta	-	3a	Rhm
BDP	-	2SA1808-P	Si-pnp	RF, 30V, 30mA, 200mW, B=82..180, >400MHz	SOT-323	16ta	-	3a	Rhm
BDP	-	2SA1821-P	Si-pnp	HF, 20V, 30mA, 150mW, >400MHz, B=82..180	SC-75A	16ta	-	3a	Rhm
BDs	-	BCW61D	Si-pnp	GP, 32V, 100mA, 330mW, B=380..630, 250MHz	SOT-23	16ta	-	3a	Sie
BDt	-	BCW61D	Si-pnp	GP, 32V, 200mA, 250mW, B=380..630, >100MHz	SOT-23	16ta	-	3a	PhM
BDT	-	AME8500AEETAF20	Vdet-IC	2.0V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3b	Ame
BDT	cm	AME8500AEETAF20Z	Vdet-IC	2.0V±1.5%, -Reset PPO, 210ms, lead free	SOT-23	16vdc	VD7	3b	Ame
BDU	-	AME8500BEETBE42	Vdet-IC	4.20V±1.5%, -Reset ODO, 150ms	SOT-23	16vdb	VD6	3b	Ame
BDU	cm	AME8500BEETBE42Z	Vdet-IC	4.20V±1.5%, -Reset ODO, 150ms, lead free	SOT-23	16vdb	VD6	3b	Ame
BDW	-	BCW61D	Si-pnp	GP, 32V, 200mA, 250mW, B=380..630, >100MHz	SOT-23	16ta	-	3a	PhC
BDX	-	AME8500BEETBF45	Vdet-IC	4.50V±1.5%, -Reset ODO, 210ms	SOT-23	16vdb	VD6	3b	Ame
BDX	cm	AME8500BEETBF45Z	Vdet-IC	4.50V±1.5%, -Reset ODO, 210ms, lead free	SOT-23	16vdb	VD6	3b	Ame
bE	-	BU45K452G	Vdet-IC	4.5V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Be	-	BD48K41G	Vdet-IC	4.1V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
BE	-	1SV172	C-diode	Dual, VHF/UHF-B, 50V, 0.25pF(50V), Rs=7Ω(10mA), 100MHz)	SOT-23	16dl	-	3a	Tos
BE	-	1SV252	PIN-diode	Dual, VHF/UHF-B, AGC, 50V, 0.25pF(50V), 7Ω(10mA, 100MHz)	SOT-23	16ea	-	3a	Tos
BE	-	2SC3440-E	Si-npn	Relay-Drv, 25V, 1A, 150mW, B=150..300, 180MHz	SC-59	16ta	-	3a	Mit



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BE	-	AP1772B-22GX	LVR-IC	LDO, 2.2V±2%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BE	-	AP1772B-22PX	LVR-IC	LDO, 2.2V±2%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BE	-	AP432IR	Vref-IC	Adjustable, Precision, Shunt, 1.24V±1%	SOT-23-3L	16rd	RF1	3a	Ana
BE	-	BAS70LT1	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dc	-	3a	Ons
BE	-	BAS70W	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dc	-	3c	Sec
BE	-	BCW61E	Si-pnp	GP, 32V, 200mA, 250mW, B=450..900, >100MHz	SOT-23	16ta	-	3a	PhH
BE	-	EP1201W28	LVR-IC	LDO, 12.8V±2%, 250mA	SOT-23	16cg	VR1	3ba	Eor
BE	-	GS6333UR23D3	Vdet-IC	2.3V±1.8%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
BE	-	MMBZ5245B	Z-diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 350mW	SOT-23	16dc	-	3c	Jiy
BE	-	PT7M7803TT	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdc	VD7	3b	Pti
BE	-	RT9169-25CV	LVR-IC	LDO, 2.5V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BE	-	SiP6333R23D3	Vdet-IC	2.3V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
BE	cc	AP1772B-22GC	LVR-IC	LDO, 2.2V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BE	cc	AP1772B-22PC	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BE	cu	AP1772B-22GX1	LVR-IC	LDO, 2.2V±1%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BE	cu	AP1772B-22PX1	LVR-IC	LDO, 2.2V±1%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BE	cu	PT7M7803TTE	Vdet-IC	3.08V±1.5%, -Reset ODO, Lead free	SOT-23	16vdc	VD7	3b	Pti
BE	dd	AP1772B-22GC1	LVR-IC	LDO, 2.2V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BE	dd	AP1772B-22PC1	LVR-IC	LDO, 2.2V±1%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BE-	-	RT9169-25PV	LVR-IC	LDO, 2.5V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BE1	-	BZX84C75ET1	Z-diode	70.79V, Zzt=255Ω, Izt=2mA, 225mW	SOT-23	16dc	-	3b	Ons
BE1	cn	BZX84C75ET1G	Z-diode	70.79V, Zzt=255Ω, Izt=2mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BE2	-	MMBZ5221E	Z-diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3b	Ons
BE3E	-	DTB143EL-AE3	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3a	Utc
BE3E	-	DTB143EL-AL3	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3a	Utc
BE3E	df	DTB143EG-AE3	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, R1/R2=4.7k/4.7k, Halogen free	SOT-23	16ta	-	3a	Utc
BE3E	df	DTB143EG-AL3	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, R1/R2=4.7k/4.7k, Halogen free	SOT-323	16ta	-	3a	Utc
BE7	-	MMBZ5226E	Z-diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 225mW	SOT-23	16dc	-	3b	Ons
BE9	-	MMBZ5228E	Z-diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 225mW	SOT-23	16dc	-	3b	Ons
BEB	-	AME8500AEETBE40	Vdet-IC	4.0V±1.5%, -Reset ODO, 150ms	SOT-23	16vdc	VD6	3b	Ame
BEB	cm	AME8500AEETBE40Z	Vdet-IC	4.0V±1.5%, -Reset ODO, 150ms, lead free	SOT-23	16vdc	VD6	3b	Ame
BED	-	KTC9015S-D	Si-pnp	GP, Sw, 50V, 150mA, 350mW, B=64..91, >60MHz	SOT-23	16ta	-	3f	Kec
BEE	-	AME8500AEETBE31	Vdet-IC	3.08V±1.5%, -Reset ODO, 150ms	SOT-23	16vdc	VD6	3b	Ame
BEE	-	KTC9015S-E	Si-pnp	GP, Sw, 50V, 150mA, 350mW, B=68..112, >60MHz	SOT-23	16ta	-	3f	Kec
BEE	cm	AME8500AEETBE31Z	Vdet-IC	3.08V±1.5%, -Reset ODO, 150ms, lead free	SOT-23	16vdc	VD6	3b	Ame
BEF	-	KTC9015S-F	Si-pnp	GP, Sw, 50V, 150mA, 350mW, B=95..135, >60MHz	SOT-23	16ta	-	3f	Kec
BEG	-	KTC9015S-G	Si-pnp	GP, Sw, 50V, 150mA, 350mW, B=118..166, >60MHz	SOT-23	16ta	-	3f	Kec
BEH	-	KTC9015S-H	Si-pnp	GP, Sw, 50V, 150mA, 350mW, B=144..202, >60MHz	SOT-23	16ta	-	3f	Kec
BEI	-	KTC9015S-I	Si-pnp	GP, Sw, 50V, 150mA, 350mW, B=176..246, >60MHz	SOT-23	16ta	-	3f	Kec
BEW	-	BCW61E	Si-pnp	GP, 32V, 200mA, 250mW, B=450..900, >100MHz	SOT-23	16ta	-	3a	PhC
bF	-	BU45K462G	Vdet-IC	4.6V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Bf	-	BD48K42G	Vdet-IC	4.2V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
BF	-	1SS268	Si-diode	Dual, VHF-Band-Sw, 30V, <1.2pF, <0.9Ω	SOT-23	16dg	-	3a	Tos
BF	-	1SS312	Si-diode	Dual, VHF-Band-Sw, 30V, <1.2pF, <0.9Ω	SOT-23	16df	-	3a	Tos
BF	-	1SS364	Si-diode	Dual, VHF-Band-Sw, 30V, <1.2pF, <0.9Ω	SOT-23	16dg	-	3a	Tos
BF	-	2SC3440-F	Si-npn	Relay-Drv, 25V, 1A, 150mW, B=250..500, 180MHz	SC-59	16ta	-	3a	Mit
BF	-	AP432IAR	Vref-IC	Adjustable, Precision, Shunt, 1.24V±0.5%	SOT-23-3L	16rd	RF1	3a	Ana
BF	-	EP1201W33	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-23	16cg	VR1	3ba	Eor
BF	-	KDS112	C-diode	Dual, VHF-Band-S, 30V, <1.2pF(6V)	SOT-323	16dg	-	3a	Kec
BF	-	MMBZ5246B	Z-diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 350mW	SOT-23	16dc	-	3c	Jiy
BF	-	PT7M7803ST	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdc	VD7	3b	Pti
BF	-	RT9169-26CV	LVR-IC	LDO, 2.6V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BF	-	XC62RP1502M	LVR-IC	LDO, 1.5V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
BF	cu	PT7M7803STE	Vdet-IC	2.93V±1.5%, -Reset ODO, Lead free	SOT-23	16vdc	VD7	3b	Pti
BF1	-	MMBZ5229E	Z-diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 225mW	SOT-23	16dc	-	3b	Ons
BF2	-	MMBZ5230E	Z-diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 225mW	SOT-23	16dc	-	3b	Ons
BF3	-	MMBZ5231E	Z-diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 225mW	SOT-23	16dc	-	3b	Ons
BF4	-	MMBZ5232E	Z-diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 225mW	SOT-23	16dc	-	3b	Ons
BF6	-	MMBZ5234E	Z-diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 225mW	SOT-23	16dc	-	3b	Ons
BF7	-	MMBZ5235E	Z-diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 225mW	SOT-23	16dc	-	3b	Ons
BF8	-	MMBZ5236E	Z-diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 225mW	SOT-23	16dc	-	3b	Ons
BF9	-	MMBZ5237E	Z-diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 225mW	SOT-23	16dc	-	3b	Ons
BFR	-	2SC4642K-R	Si-npn	AF, 50V, 100mA, 200mW, B=180..390, >180MHz	SOT-346	16ta	-	3a	Rhm
BFR	-	2SC4723-R	Si-npn	AF, 50V, 100mA, 200mW, B=180..390, >180MHz	SOT-323	16ta	-	3a	Rhm
BFs	-	BCW61FF	Si-pnp	GP, 32V, 100mA, 330mW, B=250..460, 250MHz	SOT-23	16ta	-	3a	Sie
BFS	-	2SC4642K-S	Si-npn	AF, 50V, 100mA, 200mW, B=270..560, >180MHz	SOT-346	16ta	-	3a	Rhm
BFS	-	2SC4723-S	Si-npn	AF, 50V, 100mA, 200mW, B=270..560, >180MHz	SOT-323	16ta	-	3a	Rhm
bG	-	BU45K472G	Vdet-IC	4.7V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Bg	-	BD48K43G	Vdet-IC	4.3V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
BG	-	1SS269	Si-diode	Dual, VHF-Band-Sw, 30V, <1.2pF, <0.9Ω	SOT-23	16df	-	3a	Tos



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BG	-	1SS313	Si-diode	Dual, VHF-Band-Sw, 30V, <1.2pF, <0.9Ω	SOT-23	16df	-	3a	Tos
BG	-	2SC3440-G	Si-npn	Relay-Drv, 25V, 1A, 150mW, B=400..800, 180MHz	SC-59	16ta	-	3a	Mit
BG	-	AP1772B-25GX	LVR-IC	LDO, 2.5V±2%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BG	-	AP1772B-25PX	LVR-IC	LDO, 2.5V±2%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BG	-	BAT54AGP	Si-diode	Dual, SBD, 30V, 200mA, Vf<1V(100mA), 5ns	SOT-23	16df	-	3a	Chm
BG	-	BCW61G	Si-pnp	AF, 45V, 200mA, 250mW, B=120..220, >100MHz	SOT-23	16ta	-	3a	All
BG	-	GS6333UR24D1	Vdet-IC	2.4V±1.8%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
BG	-	PT7M7803RT	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD7	3b	Pti
BG	-	RT9169-27CV	LVR-IC	LDO, 2.7V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BG	-	SiP6333R24D1	Vdet-IC	2.4V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
BG	cc	AP1772B-25GC	LVR-IC	LDO, 2.5V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BG	cc	AP1772B-25PC	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BG	cu	AP1772B-25GX1	LVR-IC	LDO, 2.5V±1%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BG	cu	AP1772B-25PX1	LVR-IC	LDO, 2.5V±1%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BG	cu	PT7M7803RTE	Vdet-IC	2.63V±1.5%, -Reset ODO, Lead free	SOT-23	16vdc	VD7	3b	Pti
BG	dd	AP1772B-25GC1	LVR-IC	LDO, 2.5V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BG	dd	AP1772B-25PC1	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BG-	-	RT9169-27PV	LVR-IC	LDO, 2.7V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BG2	-	MMBZ5239E	Z-diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 225mW	SOT-23	16dc	-	3b	Ons
BG3	-	MMBZ5240E	Z-diode	10V±5%, Izt=20mA, Zzt=17Ω, 225mW	SOT-23	16dc	-	3b	Ons
BG5	-	MMBZ5242E	Z-diode	12V±5%, Izt=20mA, Zzt=30Ω, 225mW	SOT-23	16dc	-	3b	Ons
BG6	-	MMBZ5243E	Z-diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 225mW	SOT-23	16dc	-	3b	Ons
BG7	-	MMBZ5244E	Z-diode	14V±5%, Izt=9.0mA, Zzt=15Ω, 225mW	SOT-23	16dc	-	3b	Ons
BG8	-	MMBZ5245E	Z-diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 225mW	SOT-23	16dc	-	3b	Ons
BG9	-	MMBZ5246E	Z-diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 225mW	SOT-23	16dc	-	3b	Ons
BGp	-	BCW61G	Si-pnp	AF, 45V, 200mA, 250mW, B=120..220, >100MHz	SOT-23	16ta	-	3a	Phi
BGp	-	BCX71G	Si-pnp	GP, 45V, 200mA, 250mW, B=120..220, >100MHz	SOT-23	16ta	-	3a	PhH
BGs	-	BCW61G	Si-pnp	AF, 45V, 100mA, 330mW, B=120..220, 250MHz	SOT-23	16ta	-	3a	Sie
BGs	-	BCX71G	Si-pnp	GP, 45V, 100mA, 330mW, B= 120..220, 250MHz	SOT-23	16ta	-	3a	Sie
BGt	-	BCX71G	Si-pnp	GP, 45V, 200mA, 250mW, B=120..220, >100MHz	SOT-23	16ta	-	3a	PhM
BGW	-	BCX71G	Si-pnp	GP, 45V, 200mA, 250mW, B=120..220, >100MHz	SOT-23	16ta	-	3a	PhC
bH	-	BU45K482G	Vdet-IC	4.8V±1%, -Reset ODO, Td=200ms	SSOP-3	16vdc	VD6	3q	Rhm
Bh	-	BD48K44G	Vdet-IC	4.4V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
BH	-	1SS295	Si-diode	Dual, Schottky, UHF-Mix, 4V, 50mA	SOT-23	16ea	-	3a	Tos
BH	-	1SS350	Si-diode	SBD, UHF-det/mix, 5V, 30mA, Vf<0.23V(1mA), 0.69pF	CP	16dc	-	3a	San
BH	-	EP1202W15	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-23	16ch	VR1	3ba	Eor
BH	-	GS6333UR24D2	Vdet-IC	2.4V±1.8%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
BH	-	MMBZ5247B	Z-diode	17V±5%, Izt=8.0mA, Zzt=19Ω, 350mW	SOT-23	16dc	-	3c	Jiy
BH	-	PT7M7803ZT	Vdet-IC	2.32V±1.5%, -Reset ODO	SOT-23	16vdc	VD7	3b	Pti
BH	-	RT9169-28CV	LVR-IC	LDO, 2.8V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BH	-	SiP6333R24D2	Vdet-IC	2.4V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
BH	-	XC62RP1602M	LVR-IC	LDO, 1.6V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
BH	cu	PT7M7803ZTE	Vdet-IC	2.32V±1.5%, -Reset ODO, Lead free	SOT-23	16vdc	VD7	3b	Pti
BH2	-	MMBZ5248E	Z-diode	18V±5%, Izt=7.0mA, Zzt=23Ω, 225mW	SOT-23	16dc	-	3b	Ons
BH4	-	MMBZ5250E	Z-diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 225mW	SOT-23	16dc	-	3b	Ons
BH6	-	MMBZ5252E	Z-diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 225mW	SOT-23	16dc	-	3b	Ons
BH7	-	MMBZ5253E	Z-diode	25V±5%, Izt=5.0mA, Zzt=35Ω, 225mW	SOT-23	16dc	-	3b	Ons
BH8	-	MMBZ5254E	Z-diode	27V±5%, Izt=5.0mA, Zzt=41Ω, 225mW	SOT-23	16dc	-	3b	Ons
BH9	-	MMBZ5255E	Z-diode	28V±5%, Izt=4.5mA, Zzt=44Ω, 225mW	SOT-23	16dc	-	3b	Ons
BHM	-	2SC4699K-M	Si-npn	AF, 25V, 200mA, 200mW, B=39..82, >250MHz	SOT-346	16ta	-	3a	Rhm
BHM	-	2SC4700-M	Si-npn	RF, Sw, 25V, 200mA, 150mW, B=39..82, >250MHz	SOT-323	16ta	-	3a	Rhm
BHN	-	2SC4699K-N	Si-npn	AF, 25V, 200mA, 200mW, B=56..120, >250MHz	SOT-346	16ta	-	3a	Rhm
BHN	-	2SC4700-N	Si-npn	RF, Sw, 25V, 200mA, 150mW, B=56..120, >250MHz	SOT-323	16ta	-	3a	Rhm
BHp	-	BCX71H	Si-pnp	GP, 45V, 200mA, 250mW, B=180..310, >100MHz	SOT-23	16ta	-	3a	PhH
BHP	-	2SC4699K-P	Si-npn	AF, 25V, 200mA, 200mW, B=82..180, >250MHz	SOT-346	16ta	-	3a	Rhm
BHP	-	2SC4700-P	Si-npn	RF, Sw, 25V, 200mA, 150mW, B=82..180, >250MHz	SOT-323	16ta	-	3a	Rhm
BHs	-	BCX71H	Si-pnp	GP, 45V, 100mA, 330mW, B=180..310, 250MHz	SOT-23	16ta	-	3a	Sie
BHt	-	BCX71H	Si-pnp	GP, 45V, 200mA, 250mW, B=180..310, >100MHz	SOT-23	16ta	-	3a	PhM
BHW	-	BCX71H	Si-pnp	GP, 45V, 200mA, 250mW, B=180..310, >100MHz	SOT-23	16ta	-	3a	PhC
BI	-	GS6333UR24D3	Vdet-IC	2.4V±1.8%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
BI	-	PT7M7803YT	Vdet-IC	2.20V±1.5%, -Reset ODO	SOT-23	16vdc	VD7	3b	Pti
BI	-	SiP6333R24D3	Vdet-IC	2.4V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
BI	cu	PT7M7803YTE	Vdet-IC	2.20V±1.5%, -Reset ODO, Lead free	SOT-23	16vdc	VD7	3b	Pti
BIQ	-	2SK541-Q	n-FET	V-cam, 12V, ±50mA, 150mW, Idss=14..24mA, Up<2.5V	SOT-23	16fa	-	3a	Ren
BIR	-	2SK541-R	n-FET	V-cam, 12V, ±50mA, 150mW, Idss=20..32mA, Up<2.5V	SOT-23	16fa	-	3a	Ren
BIS	-	2SK541-S	n-FET	V-cam, 12V, ±50mA, 150mW, Idss=28..42mA, Up<2.5V	SOT-23	16fa	-	3a	Ren
BIZ	-	AME8550AEETA340Z	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3b	Ame
BIZ	cm	AME8550AEETA340L	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3b	Ame
BJ	-	BCX71J	Si-pnp	GP, 45V, 100mA, 330mW, B=250..460, 250MHz	SOT-23	16ta	-	3a	All
BJ	-	EP1202W18	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-23	16ch	VR1	3ba	Eor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BJ	-	MMBZ5248B	Z-diode	18V±5%, Izt=7.0mA, Zzt=23Ω, 350mW	SOT-23	16dc	-	3c	Jiy
BJ	-	RT9169-29CV	LVR-IC	LDO, 2.8V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BJ1	-	MMBZ5256E	Z-diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 225mW	SOT-23	16dc	-	3b	Ons
BJ2	-	MMBZ5257E	Z-diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 225mW	SOT-23	16dc	-	3b	Ons
BJ3	-	MMBZ5258E	Z-diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 225mW	SOT-23	16dc	-	3b	Ons
BJ7	-	MMBZ5262E	Z-diode	51V±5%, Izt=2.5mA, Zzt=125Ω, 225mW	SOT-23	16dc	-	3b	Ons
BJ8	-	MMBZ5263E	Z-diode	56V±5%, Izt=2.2mA, Zzt=150Ω, 225mW	SOT-23	16dc	-	3b	Ons
BJO	-	AME8570AEETAF23Y	Vdet-IC	2.32V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BJO	-	AME8570AEETAF23Z	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BJO	cm	AME8570AEETAF23L	Vdet-IC	2.32V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BJp	-	BCX71J	Si-pnp	GP, 45V, 200mA, 250mW, B=250..460, >100MHz	SOT-23	16ta	-	3a	PhH
BJP	-	AME8570AEITAF23Z	Vdet-IC	2.32V±1.5%, -Reset PPO	SC-70-3	16vdc	VD7	3b	Ame
BJP	cm	AME8570AEITAF23L	Vdet-IC	2.32V±1.5%, -Reset PPO, lead free	SC-70-3	16vdc	VD7	3b	Ame
BJR	-	AME8570AEETAF26Y	Vdet-IC	2.63V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BJR	-	AME8570AEETAF26Z	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BJR	cm	AME8570AEETAF26L	Vdet-IC	2.63V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BJS	-	AME8570AEITAF26Z	Vdet-IC	2.63V±1.5%, -Reset PPO	SC-70-3	16vdc	VD7	3b	Ame
BJS	-	BCX71J	Si-pnp	GP, 45V, 100mA, 330mW, B=250..460, 250MHz	SOT-23	16ta	-	3a	Sie
BJS	cm	AME8570AEITAF26L	Vdet-IC	2.63V±1.5%, -Reset PPO, lead free	SC-70-3	16vdc	VD7	3b	Ame
BJt	-	BCX71J	Si-pnp	GP, 45V, 200mA, 250mW, B=250..460, >100MHz	SOT-23	16ta	-	3a	PhM
BJU	-	AME8570AEETAF29Y	Vdet-IC	2.93V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BJU	-	AME8570AEETAF29Z	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BJU	cm	AME8570AEETAF29L	Vdet-IC	2.93V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BJV	-	2SD2226K-V	Si-npn	AF, 60V, 150mA, 200mW, B=820..1800, 250MHz	SOT-346	16ta	-	3a	Rhm
BJV	-	2SD2351-V	Si-npn	Hi-beta, 60V, 150mA, 200mW, B=820..1800, 250MHz	UMT3	16ta	-	3a	Rhm
BJV	-	AME8570AEITAF29Z	Vdet-IC	2.93V±1.5%, -Reset PPO	SC-70-3	16vdc	VD7	3b	Ame
BJV	cm	AME8570AEITAF29L	Vdet-IC	2.93V±1.5%, -Reset PPO, lead free	SC-70-3	16vdc	VD7	3b	Ame
BJW	-	2SD2226K-W	Si-npn	AF, 60V, 150mA, 200mW, B=1200..2700, 250MHz	SOT-346	16ta	-	3a	Rhm
BJW	-	2SD2227S-W	Si-npn	AF, 60V, 150mA, 300mW, B=1200..2700, 250MHz	SPT	16ta	-	3a	Rhm
BJW	-	2SD2351-W	Si-npn	Hi-beta, 60V, 150mA, 200mW, B=1200..2700, 250MHz	UMT3	16ta	-	3a	Rhm
BJW	-	BCX71J	Si-pnp	GP, 45V, 200mA, 250mW, B=250..460, >100MHz	SOT-23	16ta	-	3a	PhC
BJX	-	AME8570AEETCF29Y	Vdet-IC	2.93V±1.5%, +Reset PPO	TSOT-23	16vda	VD7	3b	Ame
BJX	-	AME8570AEETCF29Z	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Ame
BJX	cm	AME8570AEETCF29L	Vdet-IC	2.93V±1.5%, +Reset PPO, lead free	SOT-23	16vda	VD7	3b	Ame
BJY	-	AME8570AEITCF29Z	Vdet-IC	2.93V±1.5%, +Reset PPO	SC-70-3	16vda	VD6	3b	Ame
BJY	cm	AME8570AEITCF29L	Vdet-IC	2.93V±1.5%, +Reset PPO, lead free	SC-70-3	16vda	VD6	3b	Ame
bK	-	BU46K232G	Vdet-IC	2.3V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
Bk	-	BD48K45G	Vdet-IC	4.5V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
BK	-	AP1772B-28GX	LVR-IC	LDO, 2.8V±2%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BK	-	AP1772B-28PX	LVR-IC	LDO, 2.8V±2%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BK	-	EP1202W25	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-23	16ch	VR1	3ba	Eor
BK	-	GS6333UR25D1	Vdet-IC	2.5V±1.8%, -Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
BK	-	MMBZ5249B	Z-diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 350mW	SOT-23	16dc	-	3c	Jiy
BK	-	RT9169-30CV	LVR-IC	LDO, 3.0V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BK	-	SiP6333R25D1	Vdet-IC	2.5V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
BK	-	XC62RP1702M	LVR-IC	LDO, 1.7V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
BK	cc	AP1772B-28GC	LVR-IC	LDO, 2.8V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BK	cc	AP1772B-28PC	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BK	cu	AP1772B-28GX1	LVR-IC	LDO, 2.8V±1%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BK	cu	AP1772B-28PX1	LVR-IC	LDO, 2.8V±1%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BK	dd	AP1772B-28GC1	LVR-IC	LDO, 2.8V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BK	dd	AP1772B-28PC1	LVR-IC	LDO, 2.8V±1%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BK-	-	RT9169-30PV	LVR-IC	LDO, 3.0V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BK1	-	MMBZ5265E	Z-diode	62V±5%, Izt=2.0mA, Zzt=185Ω, 225mW	SOT-23	16dc	-	3b	Ons
BK6	-	BZX84C43ET1	Z-diode	40..46V, Zzt=150Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
BK6	cn	BZX84C43ET1G	Z-diode	40..46V, Zzt=150Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
BKA	-	AME8570AEETAF31Y	Vdet-IC	3.08V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BKA	-	AME8570AEETAF31Z	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BKA	cm	AME8570AEETAF31L	Vdet-IC	3.08V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BKB	-	AME8570AEITAF31Z	Vdet-IC	3.08V±1.5%, -Reset PPO	SC-70-3	16vdc	VD7	3b	Ame
BKB	cm	AME8570AEITAF31L	Vdet-IC	3.08V±1.5%, -Reset PPO, lead free	SC-70-3	16vdc	VD7	3b	Ame
BKD	-	AME8570AEETBF31Y	Vdet-IC	3.08V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BKD	-	AME8570AEETBF31Z	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BKD	cm	AME8570AEETBF31L	Vdet-IC	3.08V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BKE	-	AME8570AEITBF31Z	Vdet-IC	3.08V±1.5%, -Reset ODO	SC-70-3	16vdb	VD6	3b	Ame
BKE	cm	AME8570AEITBF31L	Vdet-IC	3.08V±1.5%, -Reset ODO, lead free	SC-70-3	16vdb	VD6	3b	Ame
BKG	-	AME8570AEETAF46Y	Vdet-IC	4.63V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BKG	-	AME8570AEETAF46Z	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BKG	cm	AME8570AEETAF46L	Vdet-IC	4.63V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BKH	-	AME8570AEITAF46Z	Vdet-IC	4.63V±1.5%, -Reset PPO	SC-70-3	16vdc	VD7	3b	Ame



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BKH	cm	AME8570AEITAF46L	Vdet-IC	4.63V±1.5%, -Reset PPO, lead free	SC-70-3	16vdc	VD7	3b	Ame
BKJ	-	AME8570AEETCF46Y	Vdet-IC	4.63V±1.5%, +Reset PPO	TSOT-23	16vda	VD7	3b	Ame
BKJ	-	AME8570AEETCF46Z	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Ame
BKJ	cm	AME8570AEETCF46L	Vdet-IC	4.63V±1.5%, +Reset PPO, lead free	SOT-23	16vda	VD7	3b	Ame
BKK	-	AME8570AEITCF46Z	Vdet-IC	4.63V±1.5%, +Reset PPO	SC-70-3	16vda	VD6	3b	Ame
BKK	cm	AME8570AEITCF46L	Vdet-IC	4.63V±1.5%, +Reset PPO, lead free	SC-70-3	16vda	VD6	3b	Ame
BKp	-	BCX71K	Si-pnp	GP, 45V, 200mA, 250mW, B=380..630, >100MHz	SOT-23	16ta	-	3a	PhH
BKQ	-	2SB1590K-Q	Si-pnp	Lo-sat, 15V, 1A, 200mW, B=120..270, 200MHz	SC-59	16ta	-	3a	Rhm
BKs	-	BCX71K	Si-pnp	GP, 45V, 100mA, 330mW, B=380..630, 250MHz	SOT-23	16ta	-	3a	Sie
BKt	-	BCX71K	Si-pnp	GP, 45V, 200mA, 250mW, B=380..630, >100MHz	SOT-23	16ta	-	3a	PhM
BKW	-	BCX71K	Si-pnp	GP, 45V, 200mA, 250mW, B=380..630, >100MHz	SOT-23	16ta	-	3a	PhC
BL	-	2SA1341	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	CP	16ta	-	3a	San
BL	-	2SA1676	Si-pnp-Digi	Sw, 50V, 100mA, 200MHz, R1/R2=47k/47k	SOT-323	16ta	-	3a	San
BL	-	AP1772B-285GX	LVR-IC	LDO, 2.85V±2%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BL	-	AP1772B-285PX	LVR-IC	LDO, 2.85V±2%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BL	-	EP1202W28	LVR-IC	LDO, 12.8V±2%, 250mA	SOT-23	16ch	VR1	3ba	Eor
BL	-	GS6333UR25D2	Vdet-IC	2.5V±1.8%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
BL	-	RT9169-31CV	LVR-IC	LDO, 3.1V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BL	-	SiP6333R25D2	Vdet-IC	2.5V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
BL	-	XC62RP1802M	LVR-IC	LDO, 1.8V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
BL	cc	AP1772B-285GC	LVR-IC	LDO, 2.85V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BL	cc	AP1772B-285PC	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BL	cu	AP1772B-285GX1	LVR-IC	LDO, 2.85V±1%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BL	cu	AP1772B-285PX1	LVR-IC	LDO, 2.85V±1%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BL	dd	AP1772B-285GC1	LVR-IC	LDO, 2.85V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BL	dd	AP1772B-285PC1	LVR-IC	LDO, 2.85V±1%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BLL	-	2SC4771K-L	Si-npn	HF, 30V, 50mA, 200mW, B=27..56, >600MHz	SOT-346	16ta	-	3a	Rhm
BLL	-	2SC4772-L	Si-npn	RF, 30V, 50mA, 150mW, B=27..56, >600MHz	SOT-323	16ta	-	3a	Rhm
BLM	-	2SC4771K-M	Si-npn	HF, 30V, 50mA, 200mW, B=39..82, >600MHz	SOT-346	16ta	-	3a	Rhm
BLM	-	2SC4772-M	Si-npn	RF, 30V, 50mA, 150mW, B=39..82, >600MHz	SOT-323	16ta	-	3a	Rhm
BLN	-	2SC4771K-N	Si-npn	HF, 30V, 50mA, 200mW, B=56..120, >600MHz	SOT-346	16ta	-	3a	Rhm
BLN	-	2SC4772-N	Si-npn	RF, 30V, 50mA, 150mW, B=56..120, >600MHz	SOT-323	16ta	-	3a	Rhm
BLP	-	2SC4771K-P	Si-npn	HF, 30V, 50mA, 200mW, B=82..180, >600MHz	SOT-346	16ta	-	3a	Rhm
BLP	-	2SC4772-P	Si-npn	RF, 30V, 50mA, 150mW, B=82..180, >600MHz	SOT-323	16ta	-	3a	Rhm
BLY	-	AME8570AEETAE26Y	Vdet-IC	2.63V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BLY	-	AME8570AEETAE26Z	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BLY	cm	AME8570AEETAE26L	Vdet-IC	2.63V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BLZ	-	AME8570BEETAA27Y	Vdet-IC	2.70V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BLZ	-	AME8570BEETAA27Z	Vdet-IC	2.70V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BLZ	cm	AME8570BEETAA27L	Vdet-IC	2.70V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
bM	-	BU46K242G	Vdet-IC	2.4V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
Bm	-	BD48K46G	Vdet-IC	4.6V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
BM	-	AP1772B-30GX	LVR-IC	LDO, 3.0V±2%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BM	-	AP1772B-30PX	LVR-IC	LDO, 3.0V±2%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BM	-	EP1202W33	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-23	16ch	VR1	3ba	Eor
BM	-	GS6333UR25D3	Vdet-IC	2.5V±1.8%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
BM	-	MMBZ5250B	Z-diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 350mW	SOT-23	16dc	-	3c	Jiy
BM	-	RT9169-32CV	LVR-IC	LDO, 3.2V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BM	-	SiP6333R25D3	Vdet-IC	2.5V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
BM	-	XC62RP1902M	LVR-IC	LDO, 1.9V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
BM	cc	AP1772B-30GC	LVR-IC	LDO, 3.0V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BM	cc	AP1772B-30PC	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BM	cu	AP1772B-30GX1	LVR-IC	LDO, 3.0V±1%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BM	cu	AP1772B-30PX1	LVR-IC	LDO, 3.0V±1%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BM	dd	AP1772B-30GC1	LVR-IC	LDO, 3.0V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BM	dd	AP1772B-30PC1	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BM-	-	RT9169-32PV	LVR-IC	LDO, 3.2V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BMA	-	AME8570BEETBA28Y	Vdet-IC	2.80V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BMA	-	AME8570BEETBA28Z	Vdet-IC	2.80V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BMA	cm	AME8570BEETBA28L	Vdet-IC	2.80V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BMB	-	AME8570CEETBF29Y	Vdet-IC	2.93V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BMB	-	AME8570CEETBF29Z	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BMB	cm	AME8570CEETBF29L	Vdet-IC	2.93V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BMC	-	AME8570AEETAA16Y	Vdet-IC	1.60V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BMC	-	AME8570AEETAA16Z	Vdet-IC	1.60V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BMC	cm	AME8570AEETAA16L	Vdet-IC	1.60V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BMD	-	AME8570BEETAA16Y	Vdet-IC	1.60V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BMD	-	AME8570BEETAA16Z	Vdet-IC	1.60V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BMD	cm	AME8570BEETAA16L	Vdet-IC	1.60V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BME	-	AME8570CEETAA16Y	Vdet-IC	1.60V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BME	-	AME8570CEETAA16Z	Vdet-IC	1.60V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BME	cm	AME8570CEETAA16L	Vdet-IC	1.60V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BMF	-	AME8570AEITAA16Z	Vdet-IC	1.60V±1.5%, -Reset PPO	SC-70-3	16vdc	VD7	3b	Ame
BMF	cm	AME8570AEITAA16L	Vdet-IC	1.60V±1.5%, -Reset PPO, lead free	SC-70-3	16vdc	VD7	3b	Ame
BMH	-	AME8570AEETBE20Y	Vdet-IC	2.0V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BMH	-	AME8570AEETBE20Z	Vdet-IC	2.0V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BMH	cm	AME8570AEETBE20L	Vdet-IC	2.0V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BMI	-	AME8570BEETBE20Y	Vdet-IC	2.0V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BMI	-	AME8570BEETBE20Z	Vdet-IC	2.0V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BMI	cm	AME8570BEETBE20L	Vdet-IC	2.0V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BMJ	-	AME8570CEETBE20Y	Vdet-IC	2.0V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BMJ	-	AME8570CEETBE20Z	Vdet-IC	2.0V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BMJ	cm	AME8570CEETBE20L	Vdet-IC	2.0V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BMK	-	AME8570AEITBE20Z	Vdet-IC	2.0V±1.5%, -Reset ODO	SC-70-3	16vdb	VD6	3b	Ame
BMK	cm	AME8570AEITBE20L	Vdet-IC	2.0V±1.5%, -Reset ODO, lead free	SC-70-3	16vdb	VD6	3b	Ame
BMM	-	AME8570AEETAE21Y	Vdet-IC	2.10V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BMM	-	AME8570AEETAE21Z	Vdet-IC	2.10V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BMM	cm	AME8570AEETAE21L	Vdet-IC	2.10V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BMN	-	AME8570BEETAE21Y	Vdet-IC	2.10V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BMN	-	AME8570BEETAE21Z	Vdet-IC	2.10V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BMN	cm	AME8570BEETAE21L	Vdet-IC	2.10V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BMO	-	AME8570CEETAE21Y	Vdet-IC	2.10V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BMO	-	AME8570CEETAE21Z	Vdet-IC	2.10V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BMO	cm	AME8570CEETAE21L	Vdet-IC	2.10V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BMp	-	BSS63	Si-pnp	GP, 110V, 100mA, 250mW, B>30, >50MHz	SOT-23	16ta	-	3a	PhH
BMP	-	AME8570AEITAE21Z	Vdet-IC	2.10V±1.5%, -Reset PPO	SC-70-3	16vdc	VD7	3b	Ame
BMP	cm	AME8570AEITAE21L	Vdet-IC	2.10V±1.5%, -Reset PPO, lead free	SC-70-3	16vdc	VD7	3b	Ame
BMQ	-	2SC4713K-Q	Si-npn	RF, Sw, 12V, 50mA, 200mW, B=120..270, 800MHz	SC-59	16ta	-	3a	Rhm
BMQ	-	2SC4774-Q	Si-npn	RF, Sw, 12V, 50mA, 150mW, B=120..270, >800MHz	SOT-323	16ta	-	3a	Rhm
BMR	-	2SC4713K-R	Si-npn	RF, Sw, 12V, 50mA, 200mW, B=180..390, 800MHz	SC-59	16ta	-	3a	Rhm
BMR	-	2SC4774-R	Si-npn	RF, Sw, 12V, 50mA, 150mW, B=180..390, >800MHz	SOT-323	16ta	-	3a	Rhm
BMR	-	AME8570BEETAF23Y	Vdet-IC	2.32V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BMR	-	AME8570BEETAF23Z	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BMR	cm	AME8570BEETAF23L	Vdet-IC	2.32V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BMs	-	BSS63	Si-pnp	GP, 110V, 100mA, 330mW, B>30, >50MHz	SOT-23	16ta	-	3c	Inf
BMS	-	2SC4713K	Si-npn	RF, Sw, 6V, 50mA, 200mW, B=270..560, 800MHz	SMT3	16ta	-	3a	Rhm
BMS	-	2SC4713K-S	Si-npn	RF, Sw, 12V, 50mA, 200mW, B=270..560, 800MHz	SC-59	16ta	-	3a	Rhm
BMS	-	2SC4774	Si-npn	RF, Sw, 6V, 50mA, 200mW, B=270..560, 800MHz	UMT3	16ta	-	3a	Rhm
BMS	-	2SC4774-S	Si-npn	RF, Sw, 12V, 50mA, 150mW, B=270..560, >800MHz	SOT-323	16ta	-	3a	Rhm
BMS	-	AME8570CEETAF23Y	Vdet-IC	2.32V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BMS	-	AME8570CEETAF23Z	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BMS	cm	AME8570CEETAF23L	Vdet-IC	2.32V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BMt	-	BSS63	Si-pnp	GP, 110V, 100mA, 250mW, B>30, >50MHz	SOT-23	16ta	-	3a	PhM
BMT	-	AME8570BEETAE26Y	Vdet-IC	2.63V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BMT	-	AME8570BEETAE26Z	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BMT	cm	AME8570BEETAE26L	Vdet-IC	2.63V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BMU	-	AME8570CEETAE26Y	Vdet-IC	2.63V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BMU	-	AME8570CEETAE26Z	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BMU	cm	AME8570CEETAE26L	Vdet-IC	2.63V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BMV	-	AME8570AEITAE26Z	Vdet-IC	2.63V±1.5%, -Reset PPO	SC-70-3	16vdc	VD7	3b	Ame
BMV	cm	AME8570AEITAE26L	Vdet-IC	2.63V±1.5%, -Reset PPO, lead free	SC-70-3	16vdc	VD7	3b	Ame
BMW	-	BSS63	Si-pnp	GP, 110V, 100mA, 250mW, B>30, >50MHz	SOT-23	16ta	-	3a	PhC
BMX	-	AME8570BEETAF26Y	Vdet-IC	2.63V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BMX	-	AME8570BEETAF26Z	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BMX	cm	AME8570BEETAF26L	Vdet-IC	2.63V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BMY	-	AME8570CEETAF26Y	Vdet-IC	2.63V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BMY	-	AME8570CEETAF26Z	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BMY	cm	AME8570CEETAF26L	Vdet-IC	2.63V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BMZ	-	AME8570AEETAA27Y	Vdet-IC	2.70V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BMZ	-	AME8570AEETAA27Z	Vdet-IC	2.70V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BMZ	cm	AME8570AEETAA27L	Vdet-IC	2.70V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
bN	-	BU46K252G	Vdet-IC	2.5V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
Bn	-	BD48K47G	Vdet-IC	4.7V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
BN	-	2SD2324	Si-npn-Digi+Di	Motor-Drv, 20V, 800mA, 200mW, B>70, 150MHz, R2=1kΩ	SOT-23	16ta	-	3a	San
BN	-	AP1772B-31GX	LVR-IC	LDO, 3.1V±2%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BN	-	AP1772B-31PX	LVR-IC	LDO, 3.1V±2%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BN	-	GS6332UR15D1	Vdet-IC	1.5V±1.8%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
BN	-	MMBZ5251B	Z-diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 350mW	SOT-23	16dc	-	3c	Jiy
BN	-	RT9169-33CV	LVR-IC	LDO, 3.3V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BN	-	SiP6332R15D1	Vdet-IC	1.5V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BN	cc	AP1772B-31GC	LVR-IC	LDO, 3.1V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BN	cc	AP1772B-31PC	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BN	cu	AP1772B-31GX1	LVR-IC	LDO, 3.1V±1%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BN	cu	AP1772B-31PX1	LVR-IC	LDO, 3.1V±1%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BN	dd	AP1772B-31GC1	LVR-IC	LDO, 3.1V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BN	dd	AP1772B-31PC1	LVR-IC	LDO, 3.1V±1%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BN15	-	AIC1722A-15CU	LVR-IC	LDO, 1.5V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN15P	-	AIC1722A-15PU	LVR-IC	LDO, 1.5V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN18	-	AIC1722A-18CU	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN18P	-	AIC1722A-18PU	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN20	-	AIC1722A-20CU	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN20P	-	AIC1722A-20PU	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN25	-	AIC1722A-25CU	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN25P	-	AIC1722A-25PU	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN27	-	AIC1722A-27CU	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN27P	-	AIC1722A-27PU	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN30	-	AIC1722A-30CU	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN30P	-	AIC1722A-30PU	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN33	-	AIC1722A-33CU	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN33P	-	AIC1722A-33PU	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN35	-	AIC1722A-35CU	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN35P	-	AIC1722A-35PU	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN37	-	AIC1722A-37CU	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN37P	-	AIC1722A-37PU	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN38	-	AIC1722A-38CU	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN38P	-	AIC1722A-38PU	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN50	-	AIC1722A-50CU	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN50P	-	AIC1722A-50PU	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN52	-	AIC1722A-52CU	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BN52P	-	AIC1722A-52PU	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-23	16vj	VR1	3a	Aic
BNA	-	AME8570CEETAA27Y	Vdet-IC	2.70V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BNA	-	AME8570CEETAA27Z	Vdet-IC	2.70V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BNA	cm	AME8570CEETAA27L	Vdet-IC	2.70V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BNB	-	AME8570AEITAA27Z	Vdet-IC	2.70V±1.5%, -Reset PPO	SC-70-3	16vdc	VD7	3b	Ame
BNB	cm	AME8570AEITAA27L	Vdet-IC	2.70V±1.5%, -Reset PPO, lead free	SC-70-3	16vdc	VD7	3b	Ame
BND	-	AME8570AEETAF27Y	Vdet-IC	2.70V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BND	-	AME8570AEETAF27Z	Vdet-IC	2.70V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BND	cm	AME8570AEETAF27L	Vdet-IC	2.70V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BNE	-	AME8570BEETAF27Y	Vdet-IC	2.70V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BNE	-	AME8570BEETAF27Z	Vdet-IC	2.70V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BNE	cm	AME8570BEETAF27L	Vdet-IC	2.70V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BNF	-	AME8570CEETAF27Y	Vdet-IC	2.70V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BNF	-	AME8570CEETAF27Z	Vdet-IC	2.70V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BNF	cm	AME8570CEETAF27L	Vdet-IC	2.70V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BNG	-	AME8570AEITAF27Z	Vdet-IC	2.70V±1.5%, -Reset PPO	SC-70-3	16vdc	VD7	3b	Ame
BNG	cm	AME8570AEITAF27L	Vdet-IC	2.70V±1.5%, -Reset PPO, lead free	SC-70-3	16vdc	VD7	3b	Ame
BNI	-	AME8570AEETBA28Y	Vdet-IC	2.80V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BNI	-	AME8570AEETBA28Z	Vdet-IC	2.80V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BNI	cm	AME8570AEETBA28L	Vdet-IC	2.80V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BNJ	-	AME8570CEETBA28Y	Vdet-IC	2.80V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BNJ	-	AME8570CEETBA28Z	Vdet-IC	2.80V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BNJ	cm	AME8570CEETBA28L	Vdet-IC	2.80V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BNK	-	AME8570AEITBA28Z	Vdet-IC	2.80V±1.5%, -Reset ODO	SC-70-3	16vdb	VD6	3b	Ame
BNK	cm	AME8570AEITBA28L	Vdet-IC	2.80V±1.5%, -Reset ODO, lead free	SC-70-3	16vdb	VD6	3b	Ame
BNM	-	AME8570AEETAE29Y	Vdet-IC	2.93V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BNM	-	AME8570AEETAE29Z	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BNM	cm	AME8570AEETAE29L	Vdet-IC	2.93V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BNN	-	AME8570BEETAE29Y	Vdet-IC	2.93V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BNN	-	AME8570BEETAE29Z	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BNN	cm	AME8570BEETAE29L	Vdet-IC	2.93V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BNO	-	AME8570CEETAE29Y	Vdet-IC	2.93V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BNO	-	AME8570CEETAE29Z	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BNO	cm	AME8570CEETAE29L	Vdet-IC	2.93V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BNP	-	AME8570AEITAE29Z	Vdet-IC	2.93V±1.5%, -Reset PPO	SC-70-3	16vdc	VD7	3b	Ame
BNP	cm	AME8570AEITAE29L	Vdet-IC	2.93V±1.5%, -Reset PPO, lead free	SC-70-3	16vdc	VD7	3b	Ame
BNR	-	AME8570BEETAF29Y	Vdet-IC	2.93V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BNR	-	AME8570BEETAF29Z	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BNR	cm	AME8570BEETAF29L	Vdet-IC	2.93V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BNs	-	BCW61FN	Si-pnp	LN, 32V, 100mA, 330mW, B=380..630, 250MHz	SOT-23	16ta	-	3a	Sie
BNS	-	AME8570CEETAF29Y	Vdet-IC	2.93V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BNS	-	AME8570CEETAF29Z	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BNS	cm	AME8570CEETAF29L	Vdet-IC	2.93V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BNT	-	AME8570AEETBF29Y	Vdet-IC	2.93V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BNT	-	AME8570AEETBF29Z	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BNT	cm	AME8570AEETBF29L	Vdet-IC	2.93V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BNU	-	AME8570BEETBF29Y	Vdet-IC	2.93V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BNU	-	AME8570BEETBF29Z	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BNU	cm	AME8570BEETBF29L	Vdet-IC	2.93V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BNV	-	AME8570AEITBF29Z	Vdet-IC	2.93V±1.5%, -Reset ODO	SC-70-3	16vdb	VD6	3b	Ame
BNV	cm	AME8570AEITBF29L	Vdet-IC	2.93V±1.5%, -Reset ODO, lead free	SC-70-3	16vdb	VD6	3b	Ame
BNW	-	AME8570BEETCF29Y	Vdet-IC	2.93V±1.5%, +Reset PPO	TSOT-23	16vda	VD7	3b	Ame
BNW	-	AME8570BEETCF29Z	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Ame
BNW	cm	AME8570BEETCF29L	Vdet-IC	2.93V±1.5%, +Reset PPO, lead free	SOT-23	16vda	VD7	3b	Ame
BNX	-	AME8570CEETCF29Y	Vdet-IC	2.93V±1.5%, +Reset PPO	TSOT-23	16vda	VD7	3b	Ame
BNX	-	AME8570CEETCF29Z	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Ame
BNX	cm	AME8570CEETCF29L	Vdet-IC	2.93V±1.5%, +Reset PPO, lead free	SOT-23	16vda	VD7	3b	Ame
BNY	-	AME8570BEETAF31Y	Vdet-IC	3.08V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BNY	-	AME8570BEETAF31Z	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BNY	cm	AME8570BEETAF31L	Vdet-IC	3.08V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BNZ	-	AME8570CEETAF31Y	Vdet-IC	3.08V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BNZ	-	AME8570CEETAF31Z	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BNZ	cm	AME8570CEETAF31L	Vdet-IC	3.08V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BO	-	2SC5342UF-Q	Si-npn	AF, 40V, 500mA, 200mW, B=70..140, 200MHz	SOT-323F	18ta	-	3a	Auk
BO	-	2SC5342U-Q	Si-npn	AF, 40V, 500mA, 200mW, B=70..140, 200MHz	SOT-323	16ta	-	3a	Auk
BO	-	GS6332UR15D2	Vdet-IC	1.5V±1.8%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
BO	-	SiP6332R15D2	Vdet-IC	1.5V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
BOA	-	AME8570BEETBF31Y	Vdet-IC	3.08V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BOA	-	AME8570BEETBF31Z	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BOA	cm	AME8570BEETBF31L	Vdet-IC	3.08V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BOB	-	AME8570CEETBF31Y	Vdet-IC	3.08V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BOB	-	AME8570CEETBF31Z	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BOB	cm	AME8570CEETBF31L	Vdet-IC	3.08V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BOC	-	AME8570AEETBE31Y	Vdet-IC	3.08V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BOC	-	AME8570AEETBE31Z	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BOC	cm	AME8570AEETBE31L	Vdet-IC	3.08V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BOD	-	AME8570BEETBE31Y	Vdet-IC	3.08V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BOD	-	AME8570BEETBE31Z	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BOD	cm	AME8570BEETBE31L	Vdet-IC	3.08V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BOE	-	AME8570CEETBE31Y	Vdet-IC	3.08V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BOE	-	AME8570CEETBE31Z	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BOE	cm	AME8570CEETBE31L	Vdet-IC	3.08V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BOF	-	AME8570AEITBE31Z	Vdet-IC	3.08V±1.5%, -Reset ODO	SC-70-3	16vdb	VD6	3b	Ame
BOF	cm	AME8570AEITBE31L	Vdet-IC	3.08V±1.5%, -Reset ODO, lead free	SC-70-3	16vdb	VD6	3b	Ame
BOH	-	AME8570AEETCF31Y	Vdet-IC	3.08V±1.5%, +Reset PPO	TSOT-23	16vda	VD7	3b	Ame
BOH	-	AME8570AEETCF31Z	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Ame
BOH	cm	AME8570AEETCF31L	Vdet-IC	3.08V±1.5%, +Reset PPO, lead free	SOT-23	16vda	VD7	3b	Ame
BOI	-	AME8570BEETCF31Y	Vdet-IC	3.08V±1.5%, +Reset PPO	TSOT-23	16vda	VD7	3b	Ame
BOI	-	AME8570BEETCF31Z	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Ame
BOI	cm	AME8570BEETCF31L	Vdet-IC	3.08V±1.5%, +Reset PPO, lead free	SOT-23	16vda	VD7	3b	Ame
BOJ	-	AME8570CEETCF31Y	Vdet-IC	3.08V±1.5%, +Reset PPO	TSOT-23	16vda	VD7	3b	Ame
BOJ	-	AME8570CEETCF31Z	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Ame
BOJ	cm	AME8570CEETCF31L	Vdet-IC	3.08V±1.5%, +Reset PPO, lead free	SOT-23	16vda	VD7	3b	Ame
BOK	-	AME8570AEITCF31Z	Vdet-IC	3.08V±1.5%, +Reset PPO	SC-70-3	16vda	VD6	3b	Ame
BOK	cm	AME8570AEITCF31L	Vdet-IC	3.08V±1.5%, +Reset PPO, lead free	SC-70-3	16vda	VD6	3b	Ame
BOM	-	AME8570AEETAF40Y	Vdet-IC	4.0V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BOM	-	AME8570AEETAF40Z	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BOM	cm	AME8570AEETAF40L	Vdet-IC	4.0V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BON	-	AME8570BEETAF40Y	Vdet-IC	4.0V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BON	-	AME8570BEETAF40Z	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BON	cm	AME8570BEETAF40L	Vdet-IC	4.0V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BOO	-	AME8570CEETAF40Y	Vdet-IC	4.0V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BOO	-	AME8570CEETAF40Z	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BOO	cm	AME8570CEETAF40L	Vdet-IC	4.0V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BOP	-	AME8570AEITAF40Z	Vdet-IC	4.0V±1.5%, -Reset PPO	SC-70-3	16vdc	VD7	3b	Ame
BOP	cm	AME8570AEITAF40L	Vdet-IC	4.0V±1.5%, -Reset PPO, lead free	SC-70-3	16vdc	VD7	3b	Ame
BOR	-	AME8570AEETAF44Y	Vdet-IC	4.38V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BOR	-	AME8570AEETAF44Z	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BOR	cm	AME8570AEETAF44L	Vdet-IC	4.38V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BOS	-	AME8570BEETAF44Y	Vdet-IC	4.38V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BOS	-	AME8570BEETAF44Z	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BOS	cm	AME8570BEETAF44L	Vdet-IC	4.38V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BOT	-	AME8570CEETAF44Y	Vdet-IC	4.38V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BOT	-	AME8570CEETAF44Z	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BOT	cm	AME8570CEETAF44L	Vdet-IC	4.38V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BOU	-	AME8570AEITAF44Z	Vdet-IC	4.38V±1.5%, -Reset PPO	SC-70-3	16vdc	VD7	3b	Ame
BOU	cm	AME8570AEITAF44L	Vdet-IC	4.38V±1.5%, -Reset PPO, lead free	SC-70-3	16vdc	VD7	3b	Ame
BOW	-	AME8570AEETBF44Y	Vdet-IC	4.38V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BOW	-	AME8570AEETBF44Z	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BOW	cm	AME8570AEETBF44L	Vdet-IC	4.38V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BOX	-	AME8570BEETBF44Y	Vdet-IC	4.38V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BOX	-	AME8570BEETBF44Z	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BOX	cm	AME8570BEETBF44L	Vdet-IC	4.38V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BOY	-	AME8570CEETBF44Y	Vdet-IC	4.38V±1.5%, -Reset ODO	TSOT-23	16vdb	VD6	3b	Ame
BOY	-	AME8570CEETBF44Z	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BOY	cm	AME8570CEETBF44L	Vdet-IC	4.38V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BOZ	-	AME8570AEITBF44Z	Vdet-IC	4.38V±1.5%, -Reset ODO	SC-70-3	16vdb	VD6	3b	Ame
BOZ	cm	AME8570AEITBF44L	Vdet-IC	4.38V±1.5%, -Reset ODO, lead free	SC-70-3	16vdb	VD6	3b	Ame
bP	-	BU46K262G	Vdet-IC	2.6V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
Bp	-	BD48K48G	Vdet-IC	4.8V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
BP	-	2SJ574	p-MOSFET	V-MOS, LogL, 30V, 0.3A, <3.1Ω	SOT-23	16fh	-	3a	Ren
BP	-	GS6332UR15D3	Vdet-IC	1.5V±1.8%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
BP	-	MMBZ5252B	Z-diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 350mW	SOT-23	16dc	-	3c	Jiy
BP	-	RT9169-18CVL	LVR-IC	LDO, 1.8V±2%, 100mA	SOT-23	16cg	VR1	3a	Rct
BP	-	SiP6332R15D3	Vdet-IC	1.5V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
BP-	-	RT9169-18PVL	LVR-IC	LDO, 1.8V±2%, 100mA	SOT-23	16cg	VR1	3a	Rct
BPB	-	AME8570BEETAF46Y	Vdet-IC	4.63V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BPB	-	AME8570BEETAF46Z	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BPB	cm	AME8570BEETAF46L	Vdet-IC	4.63V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BPC	-	AME8570CEETAF46Y	Vdet-IC	4.63V±1.5%, -Reset PPO	TSOT-23	16vdc	VD7	3b	Ame
BPC	-	AME8570CEETAF46Z	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BPC	cm	AME8570CEETAF46L	Vdet-IC	4.63V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BPD	-	AME8570BEETCF46Y	Vdet-IC	4.63V±1.5%, +Reset PPO	TSOT-23	16vda	VD7	3b	Ame
BPD	-	AME8570BEETCF46Z	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Ame
BPD	cm	AME8570BEETCF46L	Vdet-IC	4.63V±1.5%, +Reset PPO, lead free	SOT-23	16vda	VD7	3b	Ame
BPE	-	AME8570CEETCF46Y	Vdet-IC	4.63V±1.5%, +Reset PPO	TSOT-23	16vda	VD7	3b	Ame
BPE	-	AME8570CEETCF46Z	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Ame
BPE	cm	AME8570CEETCF46L	Vdet-IC	4.63V±1.5%, +Reset PPO, lead free	SOT-23	16vda	VD7	3b	Ame
BQ	-	2PB709AQ	Si-pnp	GP, 45V, 100mA, 250mW, B=160..260, >60MHz	SC-59	16ta	-	3a	Phi
BQ	-	2SB1218A-Q	Si-pnp	AF, 45V, 100mA, 150mW, B=160..260, >80MHz	SOT-323	16ta	-	3a	Pan
BQ	-	2SB1627-Q	Si-pnp	Lo-sat, 45V, 100mA, 80MHz, B=85..170	SOT-416	16ta	-	3a	Pan
BQ	-	2SC2412K-Q	Si-npn	Sw, 60V, 150mA, 200mW, 180MHz, B=120..270	SOT-346	16ta	-	3a	Rhm
BQ	-	2SC4081-Q	Si-npn	GP, 60V, 150mA, 200mW, 100MHz, B=120..270	SOT-323	16ta	-	3a	Rhm
BQ	-	2SC4617-Q	Si-npn	GP, 60V, 150mA, 150mW, B=120..270, 100MHz	SOT-416	16ta	-	3a	Rhm
BQ	-	2SC5658-Q	Si-npn	GP, 60V, 150mA, 150mW, 100MHz, B=120..270	VMT3	16ta	-	3a	Rhm
BQ	-	L2SC2412KQLT1	Si-npn	GP, 50V, 150mA, 200mW, 180MHz, B=120..270	SOT-23	16ta	-	3a	Lrc
BQ	-	RT9169-34CV	LVR-IC	LDO, 3.4V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
bR	-	BU46K272G	Vdet-IC	2.7V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
Br	-	BD48K49G	Vdet-IC	4.9V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
BR	-	2PB709AR	Si-pnp	GP, 45V, 100mA, 250mW, B=210..340, >70MHz	SC-59	16ta	-	3a	Phi
BR	-	2SB1218A-R	Si-pnp	AF, 45V, 100mA, 150mW, B=210..340, >80MHz	SOT-323	16ta	-	3a	Pan
BR	-	2SB1627-R	Si-pnp	Lo-sat, 45V, 100mA, 80MHz, B=120..240	SOT-416	16ta	-	3a	Pan
BR	-	2SC2412K-R	Si-npn	Sw, 60V, 150mA, 200mW, 180MHz, B=180..390	SOT-346	16ta	-	3a	Rhm
BR	-	2SC4081-R	Si-npn	GP, 60V, 150mA, 200mW, 100MHz, B=180..390	SOT-323	16ta	-	3a	Rhm
BR	-	2SC4617-R	Si-npn	GP, 60V, 150mA, 150mW, B=180..390, 100MHz	SOT-416	16ta	-	3a	Rhm
BR	-	2SC5658-R	Si-npn	GP, 60V, 150mA, 150mW, 100MHz, B=180..390	VMT3	16ta	-	3a	Rhm
BR	-	BCW60DR	Si-npn	GP, 32V, 200mA, 300mW, B=380..630, 250MHz	SOT-23	16te	-	3a	Zx
BR	-	GS6332UR16D1	Vdet-IC	1.6V±1.8%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
BR	-	L2SC2412KRLT1	Si-npn	GP, 50V, 150mA, 200mW, 180MHz, B=180..390	SOT-23	16ta	-	3a	Lrc
BR	-	MMBZ5253B	Z-diode	25V±5%, Izt=5.0mA, Zzt=35Ω, 350mW	SOT-23	16dc	-	3c	Jiy
BR	-	MSB1218A-R	Si-pnp	GP, 45V, 100mA, 150mW, B=210..340	SOT-323	16ta	-	3a	Mot
BR	-	RT9169-35CV	LVR-IC	LDO, 3.5V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BR	-	SiP6332R16D1	Vdet-IC	1.6V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
BR	-	SRA2212E	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=100k	SOT-523	16ta	-	3a	Auk
BR	-	SRA2212EF	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=100k	SOT-523F	18ta	-	3a	Auk
BR	-	SRA2212U	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=100k	SOT-323	16ta	-	3a	Auk
BRQ	-	2SB709A-Q	Si-pnp	GP, AF, 60V, 600mA, B=160..260, 150MHz	SC-59	16ta	-	3a	Pan
BRR	-	2SB709A-R	Si-pnp	GP, AF, 60V, 600mA, B=210..340, 150MHz	SC-59	16ta	-	3a	Pan
BRS	-	2SB709A-S	Si-pnp	GP, AF, 60V, 600mA, B=290..460, 150MHz	SC-59	16ta	-	3a	Pan
bS	-	BU46K282G	Vdet-IC	2.8V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
BS	-	2PB709AS	Si-pnp	GP, 45V, 100mA, 250mW, B=290..460, >80MHz	SC-59	16ta	-	3a	Phi



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BS	-	2SB1218A-S	Si-pnp	AF, 45V, 100mA, 150mW, B=290..460, >80MHz	SOT-323	16ta	-	3a	Pan
BS	-	2SB1627-S	Si-pnp	Lo-sat, 45V, 100mA, 80MHz, B=170..340	SOT-416	16ta	-	3a	Pan
BS	-	2SC2412K-S	Si-npn	Sw, 60V, 150mA, 200mW, 180MHz, B=270..560	SOT-346	16ta	-	3a	Rhm
BS	-	2SC4081-S	Si-npn	GP, 60V, 150mA, 200mW, 100MHz, B=270..560	SOT-323	16ta	-	3a	Rhm
BS	-	2SC4617-S	Si-npn	GP, 60V, 150mA, 150mW, B=270..560, 100MHz	SOT-416	16ta	-	3a	Rhm
BS	-	2SC5658-S	Si-npn	GP, 60V, 150mA, 150mW, 100MHz, B=270..560	VMT3	16ta	-	3a	Rhm
BS	-	GS6332UR16D2	Vdet-IC	1.6V±1.8%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
BS	-	MSB1218A-S	Si-pnp	GP, 45V, 100mA, 150mW, B=210..340	SOT-323	16ta	-	3a	Mot
BS	-	RT9169-36CV	LVR-IC	LDO, 3.6V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BS	-	SiP6332R16D2	Vdet-IC	1.6V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
BSA	-	BC848UA	Si-npn	GP, 30V, 100mA, 200mW, B=110..220, 150MHz	SOT-323	16ta	-	3a	Auk
BSA	-	BC848UFA	Si-npn	GP, 30V, 100mA, 200mW, B=110..220, 150MHz	SOT-323F	18ta	-	3a	Auk
BSB	-	BC848UB	Si-npn	GP, 30V, 100mA, 200mW, B=200.450, 150MHz	SOT-323	16ta	-	3a	Auk
BSB	-	BC848UFB	Si-npn	GP, 30V, 100mA, 200mW, B=200.450, 150MHz	SOT-323F	18ta	-	3a	Auk
BSC	-	BC848UC	Si-npn	GP, 30V, 100mA, 200mW, B=420..800, 150MHz	SOT-323	16ta	-	3a	Auk
BSC	-	BC848UFC	Si-npn	GP, 30V, 100mA, 200mW, B=420..800, 150MHz	SOT-323F	18ta	-	3a	Auk
BSQ	-	2SD2444K-Q	Si-npn	Lo-sat, 15V, 1A, 200mW, B=120..270, 200MHz	SC-59	16ta	-	3a	Rhm
bT	-	BU46K292G	Vdet-IC	2.9V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
BT	-	2SC4069	Si-npn	AF, GP, 50V, 100mA, 200mW, B>70, 250MHz	SOT-23	16ta	-	3a	San
BT	-	GS6332UR16D3	Vdet-IC	1.6V±1.8%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
BT	-	RT9169-37CV	LVR-IC	LDO, 3.7V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BT	-	SiP6332R16D3	Vdet-IC	1.6V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
BT15P	-	AIC1723A-15PU	LVR-IC	LDO, 1.5V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
BT18P	-	AIC1723A-18PU	LVR-IC	LDO, 1.8V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
BT20P	-	AIC1723A-20PU	LVR-IC	LDO, 2.0V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
BT25P	-	AIC1723A-25PU	LVR-IC	LDO, 2.5V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
BT27P	-	AIC1723A-27PU	LVR-IC	LDO, 2.7V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
BT30P	-	AIC1723A-30PU	LVR-IC	LDO, 3.0V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
BT33P	-	AIC1723A-33PU	LVR-IC	LDO, 3.3V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
BT35P	-	AIC1723A-35PU	LVR-IC	LDO, 3.5V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
BT37P	-	AIC1723A-37PU	LVR-IC	LDO, 3.7V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
BT38P	-	AIC1723A-38PU	LVR-IC	LDO, 3.8V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
BT50P	-	AIC1723A-50PU	LVR-IC	LDO, 5.0V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
BT52P	-	AIC1723A-52PU	LVR-IC	LDO, 5.2V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
BTS	-	AME8570BEETBF27Z	Vdet-IC	2.70V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BTS	cm	AME8570BEETBF27L	Vdet-IC	2.70V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
BTY	cm	AME8805AEETZ	LVR-IC	LDO, 3.3V±1.5%, 600mA	SOT-23	16vj	VR1	3b	Ame
BTZ	cm	AME8805MEETZ	LVR-IC	LDO, 1.8V±1.5%, 600mA	SOT-23	16vj	VR1	3b	Ame
BU	-	BCX71GR	Si-pnp	GP, 45V, 100mA, 330mW, B= 120..220, 250MHz	SOT-23	16ta	-	3a	Phi
BU	-	BCX71RG	Si-pnp	GP, 45V, 100mA, 330mW, B= 120..220, 250MHz	SOT-23	16ta	-	3a	Sie
BU	-	DA228K	Si-diode	Dual, Sw, 80V, 200mA, 200mW, Vf<1V(10mA)	SOT-346	16dl	-	3i	Rhm
BU	-	DA228U	Si-diode	Dual, Sw, 80V, 200mA, 200mW, Vf<1V(10mA)	SOT-323	16dl	-	3i	Rhm
BU	-	RT9169-38CV	LVR-IC	LDO, 3.8V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BUA	-	AME8570AEETAE18Z	Vdet-IC	1.80V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ame
BUA	cm	AME8570AEETAE18L	Vdet-IC	1.80V±1.5%, -Reset PPO, lead free	SOT-23	16vdc	VD7	3b	Ame
BV	-	1SV233	PIN-diode	VHF/UHF-AGC, 50V, 50mA, 0.23pF, Rs=5Ω(10mA, 100MHz)	SOT-23	16dc	-	3a	San
BV	-	1SV247	PIN-diode	VHF/UHF-AGC, 50V, 50mA, 0.23pF, Rs=5Ω(10mA, 100MHz)	MCP	16dc	-	3a	San
BV	-	AP1772B-36GX	LVR-IC	LDO, 3.6V±2%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BV	-	AP1772B-36PX	LVR-IC	LDO, 3.6V±2%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BV	-	CSB624B	Si-pnp	GP, 30V, 700mA, 200mW, B=110..400, 160MHz	SOT-23	16ta	-	3a	Cdi
BV	-	GS6332UR18D1	Vdet-IC	1.8V±1.8%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
BV	-	RT9169-39CV	LVR-IC	LDO, 3.9V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BV	-	SiP6332R18D1	Vdet-IC	1.8V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
BV	cc	AP1772B-36GC	LVR-IC	LDO, 3.6V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BV	cc	AP1772B-36PC	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BV	cu	AP1772B-36GX1	LVR-IC	LDO, 3.6V±1%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BV	cu	AP1772B-36PX1	LVR-IC	LDO, 3.6V±1%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BV	dd	AP1772B-36GC1	LVR-IC	LDO, 3.6V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BV	dd	AP1772B-36PC1	LVR-IC	LDO, 3.6V±1%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BV1	-	2SB624-BV1	Si-pnp	AF, 30V, 700mA, 200mW, B=110..180, 170MHz	SC-59	16ta	-	3a	Nec
BV1	-	CSB624B1	Si-pnp	GP, 30V, 700mA, 200mW, B=110..180, 160MHz	SOT-23	16ta	-	3a	Cdi
BV2	-	2SB624-BV2	Si-pnp	AF, 30V, 700mA, 200mW, B=135..220, 170MHz	SC-59	16ta	-	3a	Nec
BV2	-	CSB624B2	Si-pnp	GP, 30V, 700mA, 200mW, B=135..220, 160MHz	SOT-23	16ta	-	3a	Cdi
BV3	-	2SB624-BV3	Si-pnp	AF, 30V, 700mA, 200mW, B=170..270, 170MHz	SC-59	16ta	-	3a	Nec
BV3	-	CSB624B3	Si-pnp	GP, 30V, 700mA, 200mW, B=170..270, 160MHz	SOT-23	16ta	-	3a	Cdi
BV4	-	2SB624-BV4	Si-pnp	AF, 30V, 700mA, 200mW, B=200..320, 170MHz	SC-59	16ta	-	3a	Nec
BV4	-	CSB624B4	Si-pnp	GP, 30V, 700mA, 200mW, B=200..320, 160MHz	SOT-23	16ta	-	3a	Cdi
BV5	-	2SB624-BV5	Si-pnp	AF, 30V, 700mA, 200mW, B=250..400, 170MHz	SC-59	16ta	-	3a	Nec
BV5	-	CSB624B5	Si-pnp	GP, 30V, 700mA, 200mW, B=250..400, 160MHz	SOT-23	16ta	-	3a	Cdi
BVA	-	BC857UA	Si-pnp	GP, 50V, 100mA, 200mW, B=110..220, 150MHz	SOT-323	16ta	-	3a	Auk

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVA	-	BC857UFA	Si-pnp	GP, 50V, 100mA, 200mW, B=110..220, 150MHz	SOT-323F	18ta	-	3a	Auk
BVB	-	BC857UB	Si-pnp	GP, 50V, 100mA, 200mW, B=200..450, 150MHz	SOT-323	16ta	-	3a	Auk
BVB	-	BC857UFB	Si-pnp	GP, 50V, 100mA, 200mW, B=200..450, 150MHz	SOT-323F	18ta	-	3a	Auk
BVC	-	BC857UC	Si-pnp	GP, 50V, 100mA, 200mW, B=420..800, 150MHz	SOT-323	16ta	-	3a	Auk
BVC	-	BC857UFC	Si-pnp	GP, 50V, 100mA, 200mW, B=420..800, 150MHz	SOT-323F	18ta	-	3a	Auk
BVN	-	2SC5274	Si-npn	GP, 150V, 50mA, 150mW, B=56..120, 120MHz	SC-75A	16ta	-	3a	Rhm
bW	-	BU46K302G	Vdet-IC	3.0V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
BW	-	2SA2018	Si-pnp	Sw, 15V, 500mA, 150mW, B=270..680, 260MHz	SC-75A	16ta	-	3a	Rhm
BW	-	2SA2018H	Si-pnp	Sw, 15V, 500mA, 150mW, B=270..680, 260MHz	SC-89	18ta	-	3a	Rhm
BW	-	2SA2030	Si-pnp	Sw, 15V, 500mA, 150mW, B=270..680, 260MHz	VMT3	18ta	-	3a	Rhm
BW	-	BCW71HR	Si-npn	AF, 50V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16te	-	3a	Fer
BW	-	BCX71RH	Si-pnp	GP, 45V, 200mA, 250mW, B=180..310, >100MHz	SOT-23	16ta	-	3a	Sie
BW	-	GS6332UR18D2	Vdet-IC	1.8V±1.8%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
BW	-	RT9169-40CV	LVR-IC	LDO, 4.0V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BW1	-	2SB736-1	Si-pnp	AF, 60V, 300mA, 200mW, B=110..180, 100MHz	SOT-23	16ta	-	3a	Nec
BW2	-	2SB736-2	Si-pnp	AF, 60V, 300mA, 200mW, B=135..220, 100MHz	SOT-23	16ta	-	3a	Nec
BW3	-	2SB736-3	Si-pnp	AF, 60V, 300mA, 200mW, B=170..270, 100MHz	SOT-23	16ta	-	3a	Nec
BW4	-	2SB736-4	Si-pnp	AF, 60V, 300mA, 200mW, B=200..320, 100MHz	SOT-23	16ta	-	3a	Nec
BW5	-	2SB736-5	Si-pnp	AF, 60V, 300mA, 200mW, B=250..400, 100MHz	SOT-23	16ta	-	3a	Nec
bX	-	BU46K312G	Vdet-IC	3.1V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
BX	-	2SC5585	Si-npn	Sw, 15V, 500mA, 150mW, B=270..680, 320MHz	SC-75A	16ta	-	3a	Rhm
BX	-	2SC5663	Si-npn	Sw, 15V, 500mA, 150mW, B=270..680, 320MHz	VMT3	18ta	-	3a	Rhm
BX	-	BCW71JR	Si-npn	AF, 50V, 100mA, 250mW, B=200..400, >100MHz	SOT-23	16te	-	3a	Fer
BX	-	BCX71RJ	Si-pnp	GP, Sw, 45V, 100mA, 250mW, B=250..460, >100MHz	SOT-23	16ta	-	3a	Sie
BX	-	GS6332UR18D3	Vdet-IC	1.8V±1.8%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
BX	-	MMBZ5254B	Z-diode	27V±5%, Izt=5.0mA, Zzt=41Ω, 350mW	SOT-23	16dc	-	3c	Jiy
BX	-	RT9169-41CV	LVR-IC	LDO, 4.1V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BX	-	SiP6332R18D3	Vdet-IC	1.8V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
bY	-	BU46K322G	Vdet-IC	3.2V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
By	-	BD48K50G	Vdet-IC	5.0V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
BY	-	2SC3395	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	CP	16ta	-	3a	San
BY	-	2SC4396	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=47k/47k	SOT-323	16ta	-	3a	San
BY	-	2SC5342UF-Y	Si-npn	AF, 40V, 500mA, 200mW, B=120..240, 200MHz	SOT-323F	18ta	-	3a	Auk
BY	-	2SC5342U-Y	Si-npn	AF, 40V, 500mA, 200mW, B=120..240, 200MHz	SOT-323	16ta	-	3a	Auk
BY	-	BCW71KR	Si-npn	AF, 50V, 100mA, 250mW, B=300..600, >100MHz	SOT-23	16te	-	3a	Fer
BY	-	BCX71RK	Si-pnp	GP, Sw, 45V, 100mA, 250mW, B=380..630, >100MHz	SOT-23	16ta	-	3a	Sie
BY	-	GS6332UR19D1	Vdet-IC	1.9V±1.8%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
BY	-	RT9169-42CV	LVR-IC	LDO, 4.2V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BY	-	SiP6332R19D1	Vdet-IC	1.9V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
BY-	-	RT9169-42PV	LVR-IC	LDO, 4.2V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BZ	-	AP1772B-50GX	LVR-IC	LDO, 5.5V±2%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BZ	-	AP1772B-50PX	LVR-IC	LDO, 5.5V±2%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BZ	-	GS6332UR19D2	Vdet-IC	1.9V±1.8%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
BZ	-	MMBZ5256B	Z-diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 350mW	SOT-23	16dc	-	3c	Jiy
BZ	-	RT9169-43CV	LVR-IC	LDO, 4.3V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
BZ	-	SiP6332R19D2	Vdet-IC	1.9V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
BZ	cc	AP1772B-50GC	LVR-IC	LDO, 5.5V±2%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BZ	cc	AP1772B-50PC	LVR-IC	LDO, 5.5V±2%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BZ	cu	AP1772B-50GX1	LVR-IC	LDO, 5.5V±1%, 300mA, Halogen-free	SC-70-3	16cg	VR1	3bb	Anw
BZ	cu	AP1772B-50PX1	LVR-IC	LDO, 5.5V±1%, 300mA	SC-70-3	16cg	VR1	3bc	Anw
BZ	dd	AP1772B-50GC1	LVR-IC	LDO, 5.5V±1%, 300mA, Halogen-free	SOT-23	16cg	VR1	3bb	Anw
BZ	dd	AP1772B-50PC1	LVR-IC	LDO, 5.5V±1%, 300mA	SOT-23	16cg	VR1	3bc	Anw
BZY	-	AME8550AEETB500Z	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
BZY	cm	AME8550AEETB500L	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
c	-	AX6901CA	Vdet-IC	4.0V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Axl
c	-	CH3906TPT	Si-pnp	AF, Sw, 40V, 200mA, B=100..300, 250MHz	SOT-416	16ta	-	3a	Chm
C	cr	ELM7524NEB	Vdet-IC	2.4V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
C	cs	ELM7524CEB	Vdet-IC	2.4V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
C0	-	AP130-41TW	LVR-IC	LDO, 4.1V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
C0	-	AP130-41W	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
C0	-	AP8821C-20GC	Vdet-IC	2.0V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
C0	-	AP8821C-20GT	Vdet-IC	2.0V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
C0	-	AP8821C-20PC	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
C0	-	AP8821C-20PT	Vdet-IC	2.0V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
C0	-	BZX84C51	Z-diode	48..54V, Zzt=180Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
C0	-	ELM89201B	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
C0	-	ELM9720NBB	Vdet-IC	2.0V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
C0	-	HSMS-2820	Si-diode	Schottky, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-23	16dc	-	3a	Agi
C0	-	HSMS-282B	Si-diode	Schottky, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-323	16dc	-	3a	Agi
C0	-	KV1700R	C-diode	2x FM-tun, 14V, 50mA, 27.4/79.93pF(8..2V), <0.3Ω (100MHz)	SOT-23C-3	16dg	-	3a	Tok





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C0	-	KV1700S	C-diode	2xFM-tun, 14V, 50mA, 27.4/79.93pF(8..2V), <0.3Ω (100MHz)	SOT-23	16dg	-	3a	Tok
C0	-	KV1705R	C-diode	2x AM-up conv, 14V, 50mA, 52/148pF(8..2V), <0.5Ω(100MHz)	SOT-23C-3	16dg	-	3a	Tok
C0	-	KV1705S	C-diode	2x AM-up conv, 14V, 50mA, 52/148pF(8..2V), <0.5Ω(100MHz)	SOT-23	16dg	-	3a	Tok
C0	-	R3111N202A	Vdet-IC	2V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
C0	-	R3113D301A	Vdet-IC	3V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
C0	-	R3130N30EC	Vdet-IC	3V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
C0	-	TC54VC2002ECB	Vdet-IC	2.0V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
C03	-	CMST3410	Si-npn	GP, 40V, 1A, 275mW, B=100..300, 100MHz	SOT-323	16ta	-	3a	Cen
C03	-	XC61CC2002M	Vdet-IC	2.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
C03	-	XE61CC2045MR	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
C05	-	KV1705R	C-diode	2x AM-up conv, 14V, 50mA, 52/148pF(8..2V), <0.5Ω(100MHz)	SOT-23C-3	16dg	-	3a	Tok
C05	-	KV1705S	C-diode	2x AM-up conv, 14V, 50mA, 52/148pF(8..2V), <0.5Ω(100MHz)	SOT-23	16dg	-	3a	Tok
C05	-	LN61FC2012M	Vdet-IC	2.0V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
C05	-	XC61FC2012M	Vdet-IC	2.0V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
C05	-	XC61HC2012MR	Vdet-IC	2.0V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
C06	-	LN61FC2042M	Vdet-IC	2.0V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
C06	-	XC61FC2042M	Vdet-IC	2.0V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
C06	-	XC61HC2042MR	Vdet-IC	2.0V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
C07	-	CMST7410	Si-pnp	GP, 40V, 1A, 275mW, B=100..300, 100MHz	SOT-323	16ta	-	3a	Cen
C07	-	LN61FC2052M	Vdet-IC	2.0V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
C07	-	XC61FC2052M	Vdet-IC	2.0V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
C07	-	XC61HC2052MR	Vdet-IC	2.0V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
C082A	-	VDA0820CTA	Vdet-IC	0.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C092A	-	VDA0920CTA	Vdet-IC	0.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C0C	-	KIC3201T-20	LVR-IC	LDO, 2.0V±2%, 400mA	TSM	16cg	VR1	3f	Kec
C1	-	2SJ559	p-MOSFET	V-MOS, LogL, 30V, ±0.1A, <60Ω	SOT-23	16fh	-	3a	Nec
C1	-	AP130-42TW	LVR-IC	LDO, 4.2V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
C1	-	AP130-42W	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
C1	-	AP8821C-21GC	Vdet-IC	2.1V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
C1	-	AP8821C-21GT	Vdet-IC	2.1V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
C1	-	AP8821C-21PC	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
C1	-	AP8821C-21PT	Vdet-IC	2.1V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
C1	-	APE6812N-A	Vdet-IC	4.63V±2%, +Reset PPO	SOT-23	16vda	VD7	3b	Ape
C1	-	APE6812U-A	Vdet-IC	4.63V±2%, +Reset PPO	SC-70	16vda	VD7	3b	Ape
C1	-	AX6904AR	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Axl
C1	-	BCW29	Si-pnp	GP, 20V, 100mA, 350mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	Rhm
C1	-	ELM89211B	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
C1	-	ELM9721NBB	Vdet-IC	2.1V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
C1	-	MMBZ5221B	Z-diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 350mW	SOT-23	16dc	-	3c	Pjt
C1	-	MMBZ5221BW	Z-diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 150mW	SOT-523	16dc	-	3a	Di
C1	-	MMBZ5221BW	Z-diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-323	16dc	-	3c	Pjt
C1	-	R3111N212A	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
C1	-	R3113D311A	Vdet-IC	3.1V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
C1	-	R3130N31EC	Vdet-IC	3.1V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
C1	-	RT9161-25CV	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
C1	-	SST111	n-FET	Sw, 35V, 350mW, Idss=20mA, Rds(on)=30Ω, 2/6ns	SOT-23	16fj	-	3a	Six
C1	-	TC54VC2102ECB	Vdet-IC	2.1V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
C1-	-	RT9161-25PV	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
C102A	-	VDA1020CTA	Vdet-IC	1.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C11	-	AIC1746-11GJ3	LVR-IC	LDO, 1.1V±2%, 150mA	SOT-323	16cg	VR1	3a	Aic
C11	-	CM7P611C-11-T	Vdet-IC	1.1V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C11	-	LN809C4651M	Vdet-IC	4.63V±1%, Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Nln
C11	-	SST111	n-FET	Sw, 35V, 350mW, Idss=20mA, Rds(on)=30Ω, 2/6ns	SOT-23	16fj	-	3a	Lns
C112A	-	VDA1120CTA	Vdet-IC	1.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C11B	-	FC61C113MG	Vdet-IC	1.1V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C11B	-	ML61C113M	Vdet-IC	1.1V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C11C	-	CM7P62C-11-T	Vdet-IC	1.1V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C11T	-	CM7P61C-11-T	Vdet-IC	1.1V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C12	-	AIC1746-12GJ3	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-323	16cg	VR1	3a	Aic
C12	-	CM7P611C-12-T	Vdet-IC	1.2V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C12	-	SST112	n-FET	Sw, 35V, 350mW, Idss=5mA, Rds(on)=50Ω, 2/6ns	SOT-23	16fj	-	3a	Lns
C122A	-	VDA1220CTA	Vdet-IC	1.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C12B	-	FC61C123MG	Vdet-IC	1.2V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C12B	-	ML61C123M	Vdet-IC	1.2V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C12C	-	CM7P62C-12-T	Vdet-IC	1.2V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C12T	-	CM7P61C-12-T	Vdet-IC	1.2V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C13	-	AIC1746-13GJ3	LVR-IC	LDO, 1.3V±2%, 150mA	SOT-323	16cg	VR1	3a	Aic
C13	-	CM7P611C-13-T	Vdet-IC	1.3V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C13	-	SST113	n-FET	Sw, 35V, 350mW, Idss=2mA, Rds(on)=100Ω, 2/6ns	SOT-23	16fj	-	3a	Lns
C13	-	XC61CC2102M	Vdet-IC	2.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C13	-	XE61CC2145MR	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
C132A	-	VDA1320CTA	Vdet-IC	1.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C13B	-	FC61C133MG	Vdet-IC	1.3V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C13B	-	ML61C133M	Vdet-IC	1.3V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C13C	-	CM7P62C-13-T	Vdet-IC	1.3V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C13T	-	CM7P61C-13-T	Vdet-IC	1.3V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C14	-	CM7P611C-14-T	Vdet-IC	1.4V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C14	-	LN809C4641M	Vdet-IC	4.63V±1%, Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Nln
C142A	-	VDA1420CTA	Vdet-IC	1.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C14B	-	FC61C143MG	Vdet-IC	1.4V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C14B	-	ML61C143M	Vdet-IC	1.4V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C14C	-	CM7P62C-14-T	Vdet-IC	1.4V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C14T	-	CM7P61C-14-T	Vdet-IC	1.4V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C15	-	2SA1612-15	Si-pnp	AF, 120V, 50mA, 150mW, B=135..270, >50MHz	SOT-323	16ta	-	3a	Nec
C15	-	2SA811A-15	Si-pnp	AF, Hi-beta, 120V, 50mA, 200mW, B=135..270, 90MHz	SOT-23	16ta	-	3a	Nec
C15	-	AIC1746-15GJ3	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-323	16cg	VR1	3a	Aic
C15	-	CM7P611C-15-T	Vdet-IC	1.5V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C15	-	LN61FC2112M	Vdet-IC	2.1V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
C15	-	LN809C4611M	Vdet-IC	4.63V±1%, Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Nln
C15	-	XC61FC2112M	Vdet-IC	2.1V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
C15	-	XC61HC2112MR	Vdet-IC	2.1V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
C152A	-	VDA1520CTA	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C15B	-	FC61C153MG	Vdet-IC	1.5V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C15B	-	ML61C153M	Vdet-IC	1.5V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C15C	-	CM7P62C-15-T	Vdet-IC	1.5V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C15T	-	CM7P61C-15-T	Vdet-IC	1.5V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C16	-	2SA1612-16	Si-pnp	AF, 120V, 50mA, 150mW, B=200..400, >50MHz	SOT-323	16ta	-	3a	Nec
C16	-	2SA811A-16	Si-pnp	AF, Hi-beta, 120V, 50mA, 200mW, B=200..400, 90MHz	SOT-23	16ta	-	3a	Nec
C16	-	CM7P611C-16-T	Vdet-IC	1.6V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C16	-	LN61FC2142M	Vdet-IC	2.1V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
C16	-	XC61FC2142M	Vdet-IC	2.1V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
C16	-	XC61HC2142MR	Vdet-IC	2.1V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
C162A	-	VDA1620CTA	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C16B	-	FC61C163MG	Vdet-IC	1.6V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C16B	-	ML61C163M	Vdet-IC	1.6V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C16C	-	CM7P62C-16-T	Vdet-IC	1.6V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C16T	-	CM7P61C-16-T	Vdet-IC	1.6V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C17	-	2SA1612-17	Si-pnp	AF, 120V, 50mA, 150mW, B=300..600, >50MHz	SOT-323	16ta	-	3a	Nec
C17	-	2SA811A-17	Si-pnp	AF, Hi-beta, 120V, 50mA, 200mW, B=300..600, 90MHz	SOT-23	16ta	-	3a	Nec
C17	-	CM7P611C-17-T	Vdet-IC	1.7V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C17	-	LN61FC2152M	Vdet-IC	2.1V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
C17	-	XC61FC2152M	Vdet-IC	2.1V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
C17	-	XC61HC2152MR	Vdet-IC	2.1V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
C172A	-	VDA1720CTA	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C17B	-	FC61C173MG	Vdet-IC	1.7V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C17B	-	ML61C173M	Vdet-IC	1.7V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C17C	-	CM7P62C-17-T	Vdet-IC	1.7V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C17T	-	CM7P61C-17-T	Vdet-IC	1.7V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C18	-	2SA1612-18	Si-pnp	AF, 120V, 50mA, 150mW, B=450..900, >50MHz	SOT-323	16ta	-	3a	Nec
C18	-	2SA811A-18	Si-pnp	AF, Hi-beta, 120V, 50mA, 200mW, B=450..900, 90MHz	SOT-23	16ta	-	3a	Nec
C18	-	AIC1746-18GJ3	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-323	16cg	VR1	3a	Aic
C18	-	CM7P611C-18-T	Vdet-IC	1.8V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C181A	-	VDA1810CTA	Vdet-IC	1.8V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C18B	-	FC61C183MG	Vdet-IC	1.8V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C18B	-	ML61C183M	Vdet-IC	1.8V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C18C	-	CM7P62C-18-T	Vdet-IC	1.8V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C18LA	-	VDD1810LCTA	Vdet-IC	1.8V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C18MA	-	VDD1810MCTA	Vdet-IC	1.8V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C18SA	-	VDD1810SCTA	Vdet-IC	1.8V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C18T	-	CM7P61C-18-T	Vdet-IC	1.8V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C19	-	CM7P611C-19-T	Vdet-IC	1.9V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C191A	-	VDA1910CTA	Vdet-IC	1.9V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C19B	-	FC61C193MG	Vdet-IC	1.9V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C19B	-	ML61C193M	Vdet-IC	1.9V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C19C	-	CM7P62C-19-T	Vdet-IC	1.9V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C19LA	-	VDD1910LCTA	Vdet-IC	1.9V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C19MA	-	VDD1910MCTA	Vdet-IC	1.9V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C19SA	-	VDD1910SCTA	Vdet-IC	1.9V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C19T	-	CM7P61C-19-T	Vdet-IC	1.9V±3%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C1A	-	CMPT3904	Si-npn	GP, 60V, 200mA, 350mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C1C	-	KIC3201T-21	LVR-IC	LDO, 2.1V±2%, 400mA	TSM	16cg	VR1	3f	Kec
C1D	-	CMPTA42	Si-npn	Vid, 300/300V, 500mA, 350mW, B>40, >50MHz	SOT-23	16ta	-	3a	Cen
C1G	-	CMPTA06	Si-npn	GP, 80V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	Cen
C1G	-	KSA1623-G	Si-npn	Sw, 60V, 100mA, 0.2W, B=200..400, >250MHz	SOT-23	16ta	-	3a	Sam
C1J	-	CMPT2369	Si-npn	GP, 40V, 500mA, 350mW, B=40..120, >500MHz	SOT-23	16ta	-	3a	Cen
C1K	-	CMPT6428	Si-npn	GP, 60V, 200mA, 350mW, B=250..650, 100..700MHz	SOT-23	16ta	-	3a	Cen
C1L	-	CMPT6429	Si-npn	GP, 55V, 200mA, 350mW, B=500..1250, 100..700MHz	SOT-23	16ta	-	3a	Cen
C1L	-	KSA1623-L	Si-npn	Sw, 60V, 100mA, 0.2W, B=300..600, >250MHz	SOT-23	16ta	-	3a	Sam
C1M	-	CMPTA13	Si-npn-Darl	GP, 30V, 500mA, 350mW, B>5000, >125MHz	SOT-23	16ta	-	3a	Cen
C1N	-	CMPTA14	Si-npn-Darl	GP, 30V, 500mA, 350mW, B>10000, >125MHz	SOT-23	16ta	-	3a	Cen
C1O	-	KSA1623-O	Si-npn	Sw, 60V, 100mA, 0.2W, B=90..180, >250MHz	SOT-23	16ta	-	3a	Sam
C1p	-	BCW29	Si-pnp	GP, 32V, 100mA, 250mW, B=120..260, >100MHz	SOT-23	16ta	-	3a	PhH
C1P	-	CMPT2222A	Si-npn	AF, 75V, 600mA, 350mW, B<35, >300MHz	SOT-23	16ta	-	3a	Cen
C1P	-	KSA1623-P	Si-npn	AF, 60V, 100mA, 200mW, B=90..180, >250MHz	SOT-23	16ta	-	3a	Sam
C1Q	-	CMPT5088	Si-npn	GP, 35V, 50mA, 350mW, B=300..900, >50MHz	SOT-23	16ta	-	3a	Cen
C1R	-	CMPT5089	Si-npn	AF, 30V, 50mA, 350mW, B=400..1200, >50MHz	SOT-23	16ta	-	3a	Cen
C1t	-	BCW29	Si-pnp	GP, 32V, 100mA, 250mW, B=120..260, >100MHz	SOT-23	16ta	-	3a	PhM
C1U	-	CMPT2484	Si-npn	GP, 60V, 50mA, 350mW, B=250..800	SOT-23	16ta	-	3a	Cen
C1V	-	CMPT6427	Si-npn-Darl	GP, 40V, 500mA, 350mW, B=10k..100k, >130MHz	SOT-23	16ta	-	3a	Cen
C1W	-	BCW29	Si-pnp	GP, 32V, 100mA, 250mW, B=120..260, >100MHz	SOT-23	16ta	-	3a	PhC
C1X	-	CMPT930	Si-npn	GP, 45V, 30mA, 350mW, B=100..300, >30MHz	SOT-23	16ta	-	3a	Cen
C1Y	-	KSA1623-Y	Si-npn	Sw, 60V, 100mA, 0.2W, B=135..270, >250MHz	SOT-23	16ta	-	3a	Sam
C1Z	-	CMPT6517	Si-npn	Vid, 350/350V, 500mA, 350mW, B=20..200, 40..200MHz	SOT-23	16ta	-	3a	Cen
C2	-	AP130-43TW	LVR-IC	LDO, 4.3V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
C2	-	AP130-43W	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
C2	-	AP8821C-22GC	Vdet-IC	2.2V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
C2	-	AP8821C-22GT	Vdet-IC	2.2V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
C2	-	AP8821C-22PC	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
C2	-	AP8821C-22PT	Vdet-IC	2.2V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
C2	-	APE6812N-B	Vdet-IC	4.38V±2%, +Reset PPO	SOT-23	16vda	VD7	3b	Ape
C2	-	APE6812U-B	Vdet-IC	4.38V±2%, +Reset PPO	SC-70	16vda	VD7	3b	Ape
C2	-	AX6904BR	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Axl
C2	-	BCW30	Si-pnp	GP, 32V, 100mA, 250mW, B=215..500, >100MHz	SOT-23	16ta	-	3a	Ste
C2	-	BFS38	Si-npn	AF/HF, 45V, 0.5A, >150MHz	SOT-323	16te	-	3a	Fer
C2	-	ELM89221B	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
C2	-	ELM9722NBB	Vdet-IC	2.2V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
C2	-	HSMS-2822	Si-diode	Dual, Schottky, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-23	16dl	-	3a	Agi
C2	-	HSMS-282C	Si-diode	Dual, Schottky, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-323	16dl	-	3a	Agi
C2	-	KV1720R	C-diode	2x FM-tun, 14V, 50mA, 21.34/46.48pF(8..2V), <0.3Ω (100MHz)	SOT-23C-3	16dg	-	3a	Tok
C2	-	KV1720S	C-diode	2x FM-tun, 14V, 50mA, 21.34/46.48pF(8..2V), <0.3Ω (100MHz)	SOT-23	16dg	-	3a	Tok
C2	-	MMBZ5222B	Z-diode	2.5V±5%, Izt=20mA, Zzt=30Ω, 350mW	SOT-23	16dc	-	3c	Pjt
C2	-	MMBZ5222BW	Z-diode	2.5V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-323	16dc	-	3c	Pjt
C2	-	R3111N222A	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
C2	-	R3113D321A	Vdet-IC	3.2V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
C2	-	R3130N32EC	Vdet-IC	3.2V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
C2	-	RT9161-27CV	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
C2	-	SST112	n-FET	Sw, 35V, 350mW, Idss=5mA, Rds(on)=50Ω, 2/6ns	SOT-23	16fj	-	3a	Six
C2	-	TC54VC2202ECB	Vdet-IC	2.2V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
C2-	-	RT9161-27PV	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
C20	-	2SK595-20	n-FET	Mic-preamp, 20V, 10mA, 100mW, Idss=110..170µA	2025	16fa	-	3a	San
C20	-	AIC1746-20GJ3	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-323	16cg	VR1	3a	Aic
C20	-	CM7P611C-20-T	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C20	-	CPBT720	Si-pnp	Sw, 45V, 500mA, 350mW, B>300, >150MHz	SOT-23	16ta	-	3a	Cdi
C20	cm	XC6381A201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C201A	-	VDA2010CTA	Vdet-IC	2.0V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C20B	-	FC61C202MG	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C20B	-	ML61C202M	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C20C	-	CM7P62C-20-T	Vdet-IC	2.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C20LA	-	VDD2010LCTA	Vdet-IC	2.0V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C20MA	-	VDD2010MCTA	Vdet-IC	2.0V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C20SA	-	VDD2010SCTA	Vdet-IC	2.0V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C20T	-	CM7P61C-20-T	Vdet-IC	2.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C21	-	2SK595-21	n-FET	Mic-preamp, 20V, 10mA, 100mW, Idss=150..240µA	2025	16fa	-	3a	San
C21	-	CM7P611C-21-T	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C21	-	LN809C4351M	Vdet-IC	4.38V±1%, Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Nln
C21	cm	XC6381A211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C211A	-	VDA2110CTA	Vdet-IC	2.1V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C21B	-	FC61C212MG	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C21B	-	ML61C212M	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C21C	-	CM7P62C-21-T	Vdet-IC	2.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C21LA	-	VDD2110LCTA	Vdet-IC	2.1V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C21MA	-	VDD2110MCTA	Vdet-IC	2.1V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C21SA	-	VDD2110SCTA	Vdet-IC	2.1V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C21T	-	CM7P61C-21-T	Vdet-IC	2.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C22	-	2SK595-22	n-FET	Mic-preamp, 20V, 10mA, 100mW, Idss=210..350µA	2025	16fa	-	3a	San
C22	-	CM7P611C-22-T	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C22	cm	XC6381A221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C221A	-	VDA2210CTA	Vdet-IC	2.2V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C22B	-	FC61C222MG	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C22B	-	ML61C222M	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C22C	-	CM7P62C-22-T	Vdet-IC	2.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C22LA	-	VDD2210LCTA	Vdet-IC	2.2V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C22MA	-	VDD2210MCTA	Vdet-IC	2.2V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C22SA	-	VDD2210SCTA	Vdet-IC	2.2V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C22T	-	CM7P61C-22-T	Vdet-IC	2.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C23	-	2SK595-23	n-FET	Mic-preamp, 20V, 10mA, 100mW, Idss=320..480µA	2025	16fa	-	3a	San
C23	-	CM7P611C-23-T	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C23	-	XC61CC2202M	Vdet-IC	2.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
C23	-	XE61CC2245MR	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
C23	cm	XC6381A231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C231A	-	VDA2310CTA	Vdet-IC	2.3V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C23B	-	FC61C232MG	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C23B	-	ML61C232M	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C23C	-	CM7P62C-23-T	Vdet-IC	2.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C23LA	-	VDD2310LCTA	Vdet-IC	2.3V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C23MA	-	VDD2310MCTA	Vdet-IC	2.3V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C23SA	-	VDD2310SCTA	Vdet-IC	2.3V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C23T	-	CM7P61C-23-T	Vdet-IC	2.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C24	-	2SK595-24	n-FET	Mic-preamp, 20V, 10mA, 100mW, Idss=440..800µA	2025	16fa	-	3a	San
C24	-	CM7P611C-24-T	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C24	-	LN809C4341M	Vdet-IC	4.38V±1%, Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Nln
C24	cm	XC6381A241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C241A	-	VDA2410CTA	Vdet-IC	2.4V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C24B	-	FC61C242MG	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C24B	-	ML61C242M	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C24C	-	CM7P62C-24-T	Vdet-IC	2.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C24LA	-	VDD2410LCTA	Vdet-IC	2.4V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C24MA	-	VDD2410MCTA	Vdet-IC	2.4V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C24SA	-	VDD2410SCTA	Vdet-IC	2.4V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C24T	-	CM7P61C-24-T	Vdet-IC	2.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C25	-	2SA1247-25	Si-pnp	GP, 120V, 50mA, 200mW, B=100..200, 100MHz	SOT-23	16ta	-	3a	Nec
C25	-	AIC1746-25GJ3	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-323	16cg	VR1	3a	Aic
C25	-	CM7P611C-25-T	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C25	-	LN61FC2212M	Vdet-IC	2.2V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
C25	-	LN809C4311M	Vdet-IC	4.38V±1%, Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Nln
C25	-	XC61FC2212M	Vdet-IC	2.2V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
C25	-	XC61HC2212MR	Vdet-IC	2.2V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
C25	cm	XC6381A251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C251A	-	VDA2510CTA	Vdet-IC	2.5V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C25B	-	FC61C252MG	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C25B	-	ML61C252M	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C25C	-	CM7P62C-25-T	Vdet-IC	2.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C25LA	-	VDD2510LCTA	Vdet-IC	2.5V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C25MA	-	VDD2510MCTA	Vdet-IC	2.5V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C25SA	-	VDD2510SCTA	Vdet-IC	2.5V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C25T	-	CM7P61C-25-T	Vdet-IC	2.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C26	-	2SA1247-26	Si-pnp	GP, 120V, 50mA, 200mW, B=50..100, 100MHz	SOT-23	16ta	-	3a	Nec
C26	-	CM7P611C-26-T	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C26	-	LN61FC2242M	Vdet-IC	2.2V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
C26	-	XC61FC2242M	Vdet-IC	2.2V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
C26	-	XC61HC2242MR	Vdet-IC	2.2V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
C26	cm	XC6381A261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C261A	-	VDA2610CTA	Vdet-IC	2.6V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C26B	-	FC61C262MG	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C26B	-	ML61C262M	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C26C	-	CM7P62C-26-T	Vdet-IC	2.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C26LA	-	VDD2610LCTA	Vdet-IC	2.6V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C26MA	-	VDD2610MCTA	Vdet-IC	2.6V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C26SA	-	VDD2610SCTA	Vdet-IC	2.6V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C26T	-	CM7P61C-26-T	Vdet-IC	2.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C27	-	2SA1247-27	Si-pnp	GP, 120V, 50mA, 200mW, B=80..160, 100MHz	SOT-23	16ta	-	3a	Nec
C27	-	AIC1746-27GJ3	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-323	16cg	VR1	3a	Aic
C27	-	CM7P611C-27-T	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C27	-	LN61FC2252M	Vdet-IC	2.2V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
C27	-	XC61FC2252M	Vdet-IC	2.2V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
C27	-	XC61HC2252MR	Vdet-IC	2.2V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
C27	cm	XC6381A271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C271A	-	VDA2710CTA	Vdet-IC	2.7V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C27B	-	FC61C272MG	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C27B	-	ML61C272M	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C27C	-	CM7P62C-27-T	Vdet-IC	2.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C27LA	-	VDD2710LCTA	Vdet-IC	2.7V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C27MA	-	VDD2710MCTA	Vdet-IC	2.7V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C27SA	-	VDD2710SCTA	Vdet-IC	2.7V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C27T	-	CM7P61C-27-T	Vdet-IC	2.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C28	-	2SA1247-28	Si-pnp	GP, 120V, 50mA, 200mW, B=125..250, 100MHz	SOT-23	16ta	-	3a	Nec
C28	-	CM7P611C-28-T	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C28	cm	XC6381A281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C281A	-	VDA2810CTA	Vdet-IC	2.8V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C28B	-	FC61C282MG	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C28B	-	ML61C282M	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C28C	-	CM7P62C-28-T	Vdet-IC	2.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C28LA	-	VDD2810LCTA	Vdet-IC	2.8V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C28MA	-	VDD2810MCTA	Vdet-IC	2.8V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C28SA	-	VDD2810SCTA	Vdet-IC	2.8V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C28T	-	CM7P61C-28-T	Vdet-IC	2.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C29	-	CM7P611C-29-T	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C29	-	CMPTA29	Si-npn-Darl	GP, 100V, 500mA, 350mW, B>10000, >125MHz	SOT-23	16ta	-	3a	Cen
C29	cm	XC6381A291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C291A	-	VDA2910CTA	Vdet-IC	2.9V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C29B	-	FC61C292MG	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C29B	-	ML61C292M	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C29C	-	CM7P62C-29-T	Vdet-IC	2.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C29LA	-	VDD2910LCTA	Vdet-IC	2.9V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C29MA	-	VDD2910MCTA	Vdet-IC	2.9V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C29SA	-	VDD2910SCTA	Vdet-IC	2.9V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C29T	-	CM7P61C-29-T	Vdet-IC	2.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C2A	-	CMPT3906	Si-pnp	GP, 40V, 200mA, 350mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Cen
C2A	-	ZDC833A	C-diode	Dual, 25V, 29.7/33.6pF, Q>200	SOT-23	16dg	-	3a	Zx
C2A	-	ZDC833ATA	C-diode	Dual, VHF/UHF-Tuning, 25V, 330mW, 33pF(2V), ΔC=±10%	SOT-323	16dg	-	3a	Zx
C2C	-	KIC3201T-22	LVR-IC	LDO, 2.2V±2%, 400mA	TSM	16cg	VR1	3f	Kec
C2D	-	CMPTA92	Si-pnp	Vid, 300/300V, 500mA, 350mW, B>25, >50MHz	SOT-23	16ta	-	3a	Cen
C2F	-	CMPT2907A	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Cen
C2G	-	CMPTA56	Si-pnp	AF-Drv, 80V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3a	Cen
C2J	-	AIC1746-285GJ3	LVR-IC	LDO, 2.85V±2%, 150mA	SOT-323	16cg	VR1	3a	Aic
C2J	-	CMPT3640	Si-pnp	RF, 12V, 80mA, 350mW, B=30..120, >500MHz	SOT-23	16ta	-	3a	Cen
C2L	-	CMPT5401	Si-pnp	GP, 160V, 500mA, 350mW, B=60..240, 100..300MHz	SOT-23	16ta	-	3a	Cen
C2p	-	BCW30	Si-pnp	GP, 32V, 100mA, 250mW, B=215..500, >100MHz	SOT-23	16ta	-	3a	PhH
C2P	-	CMPT5086	Si-pnp	GP, 50V, 50mA, 350mW, B=150..500, >40MHz	SOT-23	16ta	-	3a	Cen
C2Q	-	CMPT5087	Si-pnp	GP, 50V, 50mA, 350mW, B=250..800, >40MHz	SOT-23	16ta	-	3a	Cen
C2R	-	CMPT3646	Si-npn	GP, 40V, 200mA, 350mW, B=30..120, >350MHz	SOT-23	16ta	-	3a	Cen
C2t	-	BCW30	Si-pnp	GP, 32V, 100mA, 250mW, B=215..500, >100MHz	SOT-23	16ta	-	3a	PhM
C2T	-	CMPT4403	Si-pnp	GP, 40V, 600mA, 350mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Cen
C2U	-	CMPTA63	Si-pnp-Darl	GP, 30V, 500mA, 350mW, B>10000, >125MHz	SOT-23	16ta	-	3a	Cen
C2V	-	CMPTA64	Si-pnp-Darl	GP, 30V, 500mA, 350mW, B>20000, >125MHz	SOT-23	16ta	-	3a	Cen
C2W	-	BCW30	Si-pnp	GP, 32V, 100mA, 250mW, B=215..500, >100MHz	SOT-23	16ta	-	3a	PhC
C2W	-	CMPT8599	Si-pnp	GP, 80V, 500mA, 350mW, B=100..300, >150MHz	SOT-23	16ta	-	3a	Cen
C2X	-	CMPT4401	Si-npn	GP, 60V, 600mA, 350mW, B=100..300, >25MHz	SOT-23	16ta	-	3a	Cen
C2Z	-	CMPT6520	Si-pnp	Vid, 350/350V, 500mA, 350mW, B=20..200, >20MHz	SOT-23	16ta	-	3a	Cen
C3	-	1PS302	Si-diode	Dual, Sw, Fast, 80V, 170mA, Vf<1.2V(100mA), <4ns	SOT-323	16dl	-	3a	Phi
C3	-	1SS226	Si-diode	Dual, Sw, Fast, 85V, 100mA, <4ns	SOT-23	16ea	-	3a	Tos
C3	-	1SS302	Si-diode	Dual, 80V, 100mA, VF<1.2V(100mA), <4ns	SOT-323	16dg	-	3a	Tos
C3	-	1SS362	Si-diode	Dual, Sw, Ultra-fast, 85V, 100mA, 150mW, Vf<1.2V(0.1A), <4ns	SOT-23	16ea	-	3a	Tos
C3	-	2PD601ART	Si-npn	GP, Sw, 60V, 100mA, 250mW, B>90, >100MHz	SOT-23	16ta	-	3a	PhH
C3	-	AP130-44TW	LVR-IC	LDO, 4.4V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
C3	-	AP130-44W	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
C3	-	AP8821C-23GC	Vdet-IC	2.3V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
C3	-	AP8821C-23GT	Vdet-IC	2.3V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
C3	-	AP8821C-23PC	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
C3	-	AP8821C-23PT	Vdet-IC	2.3V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C3	-	APE6812N-C	Vdet-IC	4.00V±2%, +Reset PPO	SOT-23	16vda	VD7	3b	Ape
C3	-	APE6812U-C	Vdet-IC	4.00V±2%, +Reset PPO	SC-70	16vda	VD7	3b	Ape
C3	-	AX6904CR	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Axl
C3	-	ELM89231B	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
C3	-	ELM9723NBB	Vdet-IC	2.3V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
C3	-	HSMS-2823	Si-diode	Dual, Schottky, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-23	16df	-	3a	Agi
C3	-	HSMS-282E	Si-diode	Dual, Schottky, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-323	16df	-	3a	Agi
C3	-	ILC5062IC23X	Vdet-IC	2.3V±2%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
C3	-	ILC5062M23X	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
C3	-	KST4126	Si-pnp	GP, 25V, 200mA, 350mW, B=120..360, >250MHz	SOT-23	16ta	-	3a	Sam
C3	-	MMBT4126	Si-pnp	GP, 25V, 200mA, 350mW, B=120..360, >250MHz	SOT-23	16ta	-	3a	Mot
C3	-	MMBZ5223B	Z-diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 350mW	SOT-23	16dc	-	3c	Pjt
C3	-	MMBZ5223BW	Z-diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 150mW	SOT-523	16dc	-	3a	Di
C3	-	MMBZ5223BW	Z-diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-323	16dc	-	3c	Pjt
C3	-	R3111N232A	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
C3	-	R3113D331A	Vdet-IC	3.3V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
C3	-	R3130N33EC	Vdet-IC	3.3V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
C3	-	RT9161-15CV	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
C3	-	SMBT4126	Si-pnp	GP, 25V, 200mA, 350mW, B=120..360, >250MHz	SOT-23	16ta	-	3a	Sie
C3	-	SST113	n-FET	Sw, 35V, 350mW, Idss=2mA, Rds(on)=100Ω, 2/6ns	SOT-23	16fj	-	3a	Six
C3	-	TC54VC2302ECB	Vdet-IC	2.3V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
C30	-	AIC1746-30GJ3	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-323	16cg	VR1	3a	Aic
C30	-	CM7P611C-30-T	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C30	cm	XC6381A301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C301A	-	VDA3010CTA	Vdet-IC	3.0V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C30B	-	FC61C302MG	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C30B	-	ML61C302M	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C30C	-	CM7P62C-30-T	Vdet-IC	3.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C30LA	-	VDD3010LCTA	Vdet-IC	3.0V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C30MA	-	VDD3010MCTA	Vdet-IC	3.0V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C30SA	-	VDD3010SCTA	Vdet-IC	3.0V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C30T	-	CM7P61C-30-T	Vdet-IC	3.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C31	-	CM7P611C-31-T	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C31	-	LN809C4051M	Vdet-IC	4.0V±1%, Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Nln
C31	cm	XC6381A311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C311A	-	VDA3110CTA	Vdet-IC	3.1V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C31B	-	FC61C312MG	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C31B	-	ML61C312M	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C31C	-	CM7P62C-31-T	Vdet-IC	3.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C31LA	-	VDD3110LCTA	Vdet-IC	3.1V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C31MA	-	VDD3110MCTA	Vdet-IC	3.1V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C31SA	-	VDD3110SCTA	Vdet-IC	3.1V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C31T	-	CM7P61C-31-T	Vdet-IC	3.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C32	-	CM7P611C-32-T	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C32	cm	XC6381A321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C321A	-	VDA3210CTA	Vdet-IC	3.2V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C32B	-	FC61C322MG	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C32B	-	ML61C322M	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C32C	-	CM7P62C-32-T	Vdet-IC	3.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C32LA	-	VDD3210LCTA	Vdet-IC	3.2V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C32MA	-	VDD3210MCTA	Vdet-IC	3.2V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C32SA	-	VDD3210SCTA	Vdet-IC	3.2V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C32T	-	CM7P61C-32-T	Vdet-IC	3.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C33	-	AIC1746-33GJ3	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-323	16cg	VR1	3a	Aic
C33	-	CM7P611C-33-T	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C33	-	XC61CC2302M	Vdet-IC	2.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
C33	-	XE61CC2345MR	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
C33	cm	XC6381A331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C331A	-	VDA3310CTA	Vdet-IC	3.3V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C33B	-	FC61C332MG	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C33B	-	ML61C332M	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C33C	-	CM7P62C-33-T	Vdet-IC	3.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C33LA	-	VDD3310LCTA	Vdet-IC	3.3V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C33MA	-	VDD3310MCTA	Vdet-IC	3.3V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C33SA	-	VDD3310SCTA	Vdet-IC	3.3V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C33T	-	CM7P61C-33-T	Vdet-IC	3.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C34	-	CM7P611C-34-T	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C34	-	LN809C4041M	Vdet-IC	4.0V±1%, Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Nln
C34	cm	XC6381A341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C341A	-	VDA3410CTA	Vdet-IC	3.4V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C34B	-	FC61C342MG	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C34B	-	ML61C342M	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C34C	-	CM7P62C-34-T	Vdet-IC	3.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C34LA	-	VDD3410LCTA	Vdet-IC	3.4V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C34MA	-	VDD3410MCTA	Vdet-IC	3.4V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C34SA	-	VDD3410SCTA	Vdet-IC	3.4V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C34T	-	CM7P61C-34-T	Vdet-IC	3.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C35	-	AIC1746-35GJ3	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-323	16cg	VR1	3a	Aic
C35	-	CM7P611C-35-T	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C35	-	KV1735S	C-diode	2x FM-tun, 16V, 50mA, 22.25/77.74pF(8..2V), <0.3Ω (100MHz)	SOT-23	16dg	-	3a	Tok
C35	-	LN61FC2312M	Vdet-IC	2.3V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
C35	-	LN809C4011M	Vdet-IC	4.0V±1%, Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Nln
C35	-	XC61FC2312M	Vdet-IC	2.3V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
C35	-	XC61HC2312MR	Vdet-IC	2.3V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
C35	cm	XC6381A351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C351A	-	VDA3510CTA	Vdet-IC	3.5V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C35B	-	FC61C352MG	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C35B	-	ML61C352M	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C35C	-	CM7P62C-35-T	Vdet-IC	3.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C35LA	-	VDD3510LCTA	Vdet-IC	3.5V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C35MA	-	VDD3510MCTA	Vdet-IC	3.5V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C35SA	-	VDD3510SCTA	Vdet-IC	3.5V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C35T	-	CM7P61C-35-T	Vdet-IC	3.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C36	-	CM7P611C-36-T	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C36	-	LN61FC2342M	Vdet-IC	2.3V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
C36	-	XC61FC2342M	Vdet-IC	2.3V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
C36	-	XC61HC2342MR	Vdet-IC	2.3V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
C36	cm	XC6381A361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C361A	-	VDA3610CTA	Vdet-IC	3.6V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C36B	-	FC61C362MG	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C36B	-	ML61C362M	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C36C	-	CM7P62C-36-T	Vdet-IC	3.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C36LA	-	VDD3610LCTA	Vdet-IC	3.6V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C36MA	-	VDD3610MCTA	Vdet-IC	3.6V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C36SA	-	VDD3610SCTA	Vdet-IC	3.6V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C36T	-	CM7P61C-36-T	Vdet-IC	3.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C37	-	AIC1746-37GJ3	LVR-IC	LDO, 3.7V±2%, 150mA	SOT-323	16cg	VR1	3a	Aic
C37	-	CM7P611C-37-T	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C37	-	LN61FC2352M	Vdet-IC	2.3V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
C37	-	XC61FC2352M	Vdet-IC	2.3V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
C37	-	XC61HC2352MR	Vdet-IC	2.3V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
C37	cm	XC6381A371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C371A	-	VDA3710CTA	Vdet-IC	3.7V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C37B	-	FC61C372MG	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C37B	-	ML61C372M	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C37C	-	CM7P62C-37-T	Vdet-IC	3.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C37LA	-	VDD3710LCTA	Vdet-IC	3.7V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C37MA	-	VDD3710MCTA	Vdet-IC	3.7V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C37SA	-	VDD3710SCTA	Vdet-IC	3.7V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C37T	-	CM7P61C-37-T	Vdet-IC	3.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C38	-	AIC1746-38GJ3	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-323	16cg	VR1	3a	Aic
C38	-	CM7P611C-38-T	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C38	cm	XC6381A381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C381A	-	VDA3810CTA	Vdet-IC	3.8V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C38B	-	FC61C382MG	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C38B	-	ML61C382M	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C38C	-	CM7P62C-38-T	Vdet-IC	3.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C38LA	-	VDD3810LCTA	Vdet-IC	3.8V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C38MA	-	VDD3810MCTA	Vdet-IC	3.8V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C38SA	-	VDD3810SCTA	Vdet-IC	3.8V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C38T	-	CM7P61C-38-T	Vdet-IC	3.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C39	-	CM7P611C-39-T	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C39	cm	XC6381A391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C391A	-	VDA3910CTA	Vdet-IC	3.9V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C39B	-	FC61C392MG	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C39B	-	ML61C392M	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C39C	-	CM7P62C-39-T	Vdet-IC	3.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C39LA	-	VDD3910LCTA	Vdet-IC	3.9V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C39MA	-	VDD3910MCTA	Vdet-IC	3.9V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C39SA	-	VDD3910SCTA	Vdet-IC	3.9V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C39T	-	CM7P61C-39-T	Vdet-IC	3.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C3A	-	CMPT3019	Si-npn	Sw, 120V, 500mA, 350mW, B=100..300, >100MHz	SOT-23	16ta	-	3a	Cen
C3A	-	ILC5062AIC23X	Vdet-IC	2.3V±1%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
C3A	-	ILC5062AM23X	Vdet-IC	2.3V±1%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
C3B	-	CMPT918	Si-npn	VHF/UHF, 30V, 50mA, 350mW, B>20, >600MHz	SOT-23	16ta	-	3a	Cen
C3C	-	KIC3201T-23	LVR-IC	LDO, 2.3V±2%, 400mA	TSM	16cg	VR1	3f	Kec
C3E	-	CMPTH10	Si-npn	RF, 30V, 25mA, 330mW, B>60, >650MHz	SOT-23	16ta	-	3a	Cen
C3p	-	2PD601ART	Si-npn	GP, Sw, 60V, 100mA, 250mW, B>90, >100MHz	SOT-23	16ta	-	3a	PhH
C3t	-	2PD601ART	Si-npn	GP, Sw, 60V, 100mA, 250mW, B>90, >100MHz	SOT-23	16ta	-	3a	PhM
C3T	-	1PS226	Si-diode	Dual, Sw, Fast, 80V, 215mA, <4ns	SC-59	16dl	-	3a	Phi
C3W	-	2PD601ART	Si-npn	GP, Sw, 60V, 100mA, 250mW, B>90, >100MHz	SOT-23	16ta	-	3a	PhC
C3Z	-	CMPTA44	Si-npn	450V, 300mA, 350mW, B=50..200, >20MHz	SOT-23	16ta	-	3a	Cen
C4	-	AP130-45TW	LVR-IC	LDO, 4.5V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
C4	-	AP130-45W	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
C4	-	AP8821C-24GC	Vdet-IC	2.4V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
C4	-	AP8821C-24GT	Vdet-IC	2.4V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
C4	-	AP8821C-24PC	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
C4	-	AP8821C-24PT	Vdet-IC	2.4V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
C4	-	APE6812N-D	Vdet-IC	3.08V±2%, +Reset PPO	SOT-23	16vda	VD7	3b	Ape
C4	-	APE6812U-D	Vdet-IC	3.08V±2%, +Reset PPO	SC-70	16vda	VD7	3b	Ape
C4	-	AX6904DR	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Axl
C4	-	BB404C	C-diode	Dual, 10V, 45.5..22pF(2..8V), 100MHz	SOT-23	16dg	-	3a	Itt
C4	-	BCW29R	Si-pnp	GP, 32V, 100mA, 250mW, B=120..260, >100MHz	SOT-23	16te	-	3a	Zx
C4	-	ELM89241B	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
C4	-	ELM9724NBB	Vdet-IC	2.4V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
C4	-	HSMS-2824	Si-diode	Dual, Schottky, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-23	16dg	-	3a	Agi
C4	-	HSMS-282F	Si-diode	Dual, Schottky, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-323	16dg	-	3a	Agi
C4	-	ILC5062IC24X	Vdet-IC	2.4V±2%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
C4	-	ILC5062M24X	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
C4	-	KA4L4M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/47k	SOT-416	16ta	-	3a	Nec
C4	-	MC804	C-diode	Dual, TV, VHF-Band-S, 35V, 1pF(6V)	SOT-23	16dg	-	3a	Mit
C4	-	R3111N242A	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
C4	-	R3113D341A	Vdet-IC	3.4V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
C4	-	R3130N34EC	Vdet-IC	3.4V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
C4	-	RT9161-30CV	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
C4	-	TC54VC2402ECB	Vdet-IC	2.4V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
C4-	-	RT9161-30PV	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
C40	-	CM7P611C-40-T	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C40	cm	XC6381A401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C401A	-	VDA4010CTA	Vdet-IC	4.0V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C40B	-	FC61C402MG	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C40B	-	ML61C402M	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C40C	-	CM7P62C-40-T	Vdet-IC	4.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C40LA	-	VDD4010LCTA	Vdet-IC	4.0V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C40MA	-	VDD4010MCTA	Vdet-IC	4.0V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C40SA	-	VDD4010SCTA	Vdet-IC	4.0V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C40T	-	CM7P61C-40-T	Vdet-IC	4.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C41	-	CM7P611C-41-T	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C41	-	LN809C3051M	Vdet-IC	3.08V±1%, Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Nln
C41	-	SST4091	n-FET	Sw, Chopper, 40..50V, Idss=30mA, Up<10V	SOT-23	16fa	-	3a	Lin
C41	cm	XC6381A411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C411A	-	VDA4110CTA	Vdet-IC	4.1V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C41B	-	FC61C412MG	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C41B	-	ML61C412M	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C41C	-	CM7P62C-41-T	Vdet-IC	4.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C41LA	-	VDD4110LCTA	Vdet-IC	4.1V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C41MA	-	VDD4110MCTA	Vdet-IC	4.1V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C41SA	-	VDD4110SCTA	Vdet-IC	4.1V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C41T	-	CM7P61C-41-T	Vdet-IC	4.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C42	-	CM7P611C-42-T	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C42	-	SST4092	n-FET	Sw, Chopper, 40..50V, Idss=15mA, Up<7V	SOT-23	16fa	-	3a	Lin
C42	cm	XC6381A421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C421A	-	VDA4210CTA	Vdet-IC	4.2V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C42B	-	FC61C422MG	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C42B	-	ML61C422M	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C42C	-	CM7P62C-42-T	Vdet-IC	4.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C42LA	-	VDD4210LCTA	Vdet-IC	4.2V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C42MA	-	VDD4210MCTA	Vdet-IC	4.2V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C42SA	-	VDD4210SCTA	Vdet-IC	4.2V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C42T	-	CM7P61C-42-T	Vdet-IC	4.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C43	-	CM7P611C-43-T	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C43	-	CMUT3410	Si-npn	GP, 40V, 1A, 250mW, B=100..300, 100MHz	SOT-523F	18ta	-	3a	Cen
C43	-	SST4093	n-FET	Sw, Chopper, 40..50V, Idss=8mA, Up<5V	SOT-23	16fa	-	3a	Lin
C43	-	XC61CC2402M	Vdet-IC	2.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
C43	-	XE61CC2445MR	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
C43	cm	XC6381A431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C431A	-	VDA4310CTA	Vdet-IC	4.3V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C43B	-	FC61C432MG	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C43B	-	ML61C432M	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C43C	-	CM7P62C-43-T	Vdet-IC	4.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C43LA	-	VDD4310LCTA	Vdet-IC	4.3V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C43MA	-	VDD4310MCTA	Vdet-IC	4.3V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C43SA	-	VDD4310SCTA	Vdet-IC	4.3V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C43T	-	CM7P61C-43-T	Vdet-IC	4.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C44	-	CM7P611C-44-T	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C44	-	LN809C3041M	Vdet-IC	3.08V±1%, Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Nln
C44	cm	XC6381A441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C441A	-	VDA4410CTA	Vdet-IC	4.4V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C44B	-	FC61C442MG	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C44B	-	ML61C442M	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C44C	-	CM7P62C-44-T	Vdet-IC	4.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C44LA	-	VDD4410LCTA	Vdet-IC	4.4V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C44MA	-	VDD4410MCTA	Vdet-IC	4.4V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C44SA	-	VDD4410SCTA	Vdet-IC	4.4V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C44T	-	CM7P61C-44-T	Vdet-IC	4.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C45	-	CM7P611C-45-T	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C45	-	LN61FC2412M	Vdet-IC	2.4V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
C45	-	LN809C3011M	Vdet-IC	3.08V±1%, Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Nln
C45	-	XC61FC2412M	Vdet-IC	2.4V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
C45	-	XC61HC2412MR	Vdet-IC	2.4V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
C45	cm	XC6381A451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C451A	-	VDA4510CTA	Vdet-IC	4.5V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C45B	-	FC61C452MG	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C45B	-	ML61C452M	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C45C	-	CM7P62C-45-T	Vdet-IC	4.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C45LA	-	VDD4510LCTA	Vdet-IC	4.5V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C45MA	-	VDD4510MCTA	Vdet-IC	4.5V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C45SA	-	VDD4510SCTA	Vdet-IC	4.5V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C45T	-	CM7P61C-45-T	Vdet-IC	4.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C46	-	BAT46C	Si-diode	Dual, SBD, 100V, 150mA, Vf<1V(250mA), 6pF	SOT-23	16df	-	3b	Ste
C46	-	CM7P611C-46-T	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C46	-	LN61FC2442M	Vdet-IC	2.4V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
C46	-	XC61FC2442M	Vdet-IC	2.4V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
C46	-	XC61HC2442MR	Vdet-IC	2.4V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
C46	cm	XC6381A461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C461A	-	VDA4610CTA	Vdet-IC	4.6V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C46B	-	FC61C462MG	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C46B	-	ML61C462M	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C46C	-	CM7P62C-46-T	Vdet-IC	4.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C46LA	-	VDD4610LCTA	Vdet-IC	4.6V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C46MA	-	VDD4610MCTA	Vdet-IC	4.6V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C46SA	-	VDD4610SCTA	Vdet-IC	4.6V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C46T	-	CM7P61C-46-T	Vdet-IC	4.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C47	-	CM7P611C-47-T	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C47	-	CMUT7410	Si-pnp	GP, 40V, 1A, 250mW, B=100..300, 100MHz	SOT-523F	18ta	-	3a	Cen
C47	-	LN61FC2452M	Vdet-IC	2.4V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
C47	-	XC61FC2452M	Vdet-IC	2.4V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
C47	-	XC61HC2452MR	Vdet-IC	2.4V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
C47	cm	XC6381A471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C471A	-	VDA4710CTA	Vdet-IC	4.7V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C47B	-	FC61C472MG	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C47B	-	ML61C472M	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C47C	-	CM7P62C-47-T	Vdet-IC	4.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C47G	-	2SC4774G-AL3R	Si-npn	RF, Sw, 6V, 50mA, 200mW, B=270..560, 800MHz, Halogen free	SOT-323	16ta	-	3a	Utc
C47L	-	2SC4774L-AL3R	Si-npn	RF, Sw, 6V, 50mA, 200mW, B=270..560, 800MHz, Lead free	SOT-323	16ta	-	3a	Utc
C47LA	-	VDD4710LCTA	Vdet-IC	4.7V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C47MA	-	VDD4710MCTA	Vdet-IC	4.7V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C47SA	-	VDD4710SCTA	Vdet-IC	4.7V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C47T	-	CM7P61C-47-T	Vdet-IC	4.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C48	-	CM7P611C-48-T	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C48	cm	XC6381A481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C481A	-	VDA4810CTA	Vdet-IC	4.8V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C48B	-	FC61C482MG	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C48B	-	ML61C482M	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C48C	-	CM7P62C-48-T	Vdet-IC	4.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C48LA	-	VDD4810LCTA	Vdet-IC	4.8V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C48MA	-	VDD4810MCTA	Vdet-IC	4.8V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C48SA	-	VDD4810SCTA	Vdet-IC	4.8V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C48T	-	CM7P61C-48-T	Vdet-IC	4.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C49	-	CM7P611C-49-T	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C49	cm	XC6381A491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C491A	-	VDA4910CTA	Vdet-IC	4.9V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C49B	-	FC61C492MG	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C49B	-	ML61C492M	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C49C	-	CM7P62C-49-T	Vdet-IC	4.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C49LA	-	VDD4910LCTA	Vdet-IC	4.9V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C49MA	-	VDD4910MCTA	Vdet-IC	4.9V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C49SA	-	VDD4910SCTA	Vdet-IC	4.9V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C49T	-	CM7P61C-49-T	Vdet-IC	4.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C4A	-	CMPT4033	Si-pnp	GP, 80V, 500mA, 350mW, B=100..300, >100MHz	SOT-23	16ta	-	3a	Cen
C4A	-	ILC5062AIC24X	Vdet-IC	2.4V±1%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
C4A	-	ILC5062AM24X	Vdet-IC	2.4V±1%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
C4C	-	KIC3201T-24	LVR-IC	LDO, 2.4V±2%, 400mA	TSM	16cg	VR1	3f	Kec
C4G-	-	2SC2412KPT-R	Si-npn	Sw, 50V, 150mA, 200mW, B=180..390, 180MHz	SOT-23	16ta	-	3a	Chm
C4G-	-	CHT846BPT-R	Si-npn	AF, Sw, 65V, 100mA, B=200..450, 200MHz	SOT-23	16ta	-	3a	Chm
C5	-	2SA811-5	Si-pnp	AF, Hi-beta, 50V, 30mA, 200mW, B=135..270, 100MHz	SOT-23	16ta	-	3a	Nec
C5	-	AP130-46TW	LVR-IC	LDO, 4.6V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
C5	-	AP130-46W	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
C5	-	AP8821C-25GC	Vdet-IC	2.5V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
C5	-	AP8821C-25GT	Vdet-IC	2.5V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
C5	-	AP8821C-25PC	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
C5	-	AP8821C-25PT	Vdet-IC	2.5V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
C5	-	APE6812N-E	Vdet-IC	2.93V±2%, +Reset PPO	SOT-23	16vda	VD7	3b	Ape
C5	-	APE6812U-E	Vdet-IC	2.93V±2%, +Reset PPO	SC-70	16vda	VD7	3b	Ape
C5	-	AX6904ER	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Axl
C5	-	BCW30R	Si-pnp	GP, 32V, 100mA, 250mW, B=215..500, >100MHz	SOT-23	16te	-	3a	Zx
C5	-	BFS40	Si-pnp	AF/HF, 45V, 0.5A, >150MHz	SOT-323	16te	-	3a	Fer
C5	-	ELM89251B	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
C5	-	ELM9725NBB	Vdet-IC	2.5V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
C5	-	ILC5062IC25X	Vdet-IC	2.5V±2%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
C5	-	ILC5062M25X	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
C5	-	MMBA811C5	Si-pnp	AF, LN, 50V, 50mA, 350mW, B=135..270, >75MHz	SOT-23	16ta	-	3a	Sam
C5	-	MMBZ5225B	Z-diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 350mW	SOT-23	16dc	-	3c	Pjt
C5	-	MMBZ5225BW	Z-diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 150mW	SOT-523	16dc	-	3a	Di
C5	-	MMBZ5225BW	Z-diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 200mW	SOT-323	16dc	-	3c	Pjt
C5	-	R3111N252A	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
C5	-	R3113D351A	Vdet-IC	3.5V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
C5	-	R3130N35EC	Vdet-IC	3.5V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
C5	-	RT9161-35CV	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
C5	-	Si2315DS	p-MOSFET	V-MOS, LogL, 12V, 3.5A, <118ns	SOT-23	16fh	-	3a	Six
C5	-	SP809NEK-4-6	Vdet-IC	4.6V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Sip
C5	-	TC54VC2502ECB	Vdet-IC	2.5V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
C50	-	CM7P611C-50-T	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C50	cm	XC6381A501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C501A	-	VDA5010CTA	Vdet-IC	5.0V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C50B	-	FC61C502MG	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C50B	-	ML61C502M	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C50C	-	CM7P62C-50-T	Vdet-IC	5.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C50LA	-	VDD5010LCTA	Vdet-IC	5.0V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C50MA	-	VDD5010MCTA	Vdet-IC	5.0V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C50SA	-	VDD5010SCTA	Vdet-IC	5.0V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C50T	-	CM7P61C-50-T	Vdet-IC	5.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C51	-	CM7P611C-51-T	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C51	-	LN809C2951M	Vdet-IC	2.93V±1%, Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Nln
C51	cm	XC6381A511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C511A	-	VDA5110CTA	Vdet-IC	5.1V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C51B	-	FC61C512MG	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C51B	-	ML61C512M	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C51C	-	CM7P62C-51-T	Vdet-IC	5.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C51LA	-	VDD5110LCTA	Vdet-IC	5.1V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C51MA	-	VDD5110MCTA	Vdet-IC	5.1V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C51SA	-	VDD5110SCTA	Vdet-IC	5.1V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C51T	-	CM7P61C-51-T	Vdet-IC	5.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C52	-	CM7P611C-52-T	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C52	cm	XC6381A521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C521A	-	VDA5210CTA	Vdet-IC	5.2V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C52B	-	FC61C522MG	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C52B	-	ML61C522M	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C52C	-	CM7P62C-52-T	Vdet-IC	5.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C52LA	-	VDD5210LCTA	Vdet-IC	5.2V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C52MA	-	VDD5210MCTA	Vdet-IC	5.2V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C52SA	-	VDD5210SCTA	Vdet-IC	5.2V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C52T	-	CM7P61C-52-T	Vdet-IC	5.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C53	-	CM7P611C-53-T	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C53	-	XC61CC2502M	Vdet-IC	2.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
C53	-	XE61CC2545MR	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
C53	cm	XC6381A531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C531A	-	VDA5310CTA	Vdet-IC	5.3V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C53B	-	FC61C532MG	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C53B	-	ML61C532M	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C53C	-	CM7P62C-53-T	Vdet-IC	5.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C53LA	-	VDD5310LCTA	Vdet-IC	5.3V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C53MA	-	VDD5310MCTA	Vdet-IC	5.3V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C53SA	-	VDD5310SCTA	Vdet-IC	5.3V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C53T	-	CM7P61C-53-T	Vdet-IC	5.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C54	-	CM7P611C-54-T	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C54	-	LN809C2941M	Vdet-IC	2.93V±1%, Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Nln
C54	cm	XC6381A541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C541A	-	VDA5410CTA	Vdet-IC	5.4V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C54B	-	FC61C542MG	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C54B	-	ML61C542M	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C54C	-	CM7P62C-54-T	Vdet-IC	5.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C54LA	-	VDD5410LCTA	Vdet-IC	5.4V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C54MA	-	VDD5410MCTA	Vdet-IC	5.4V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C54SA	-	VDD5410SCTA	Vdet-IC	5.4V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C54T	-	CM7P61C-54-T	Vdet-IC	5.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C55	-	CM7P611C-55-T	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C55	-	LN61FC2512M	Vdet-IC	2.5V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
C55	-	LN809C2911M	Vdet-IC	2.93V±1%, Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Nln
C55	-	XC61FC2512M	Vdet-IC	2.5V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
C55	-	XC61HC2512MR	Vdet-IC	2.5V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
C55	cm	XC6381A551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C551A	-	VDA5510CTA	Vdet-IC	5.5V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C55B	-	FC61C552MG	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C55B	-	ML61C552M	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C55C	-	CM7P62C-55-T	Vdet-IC	5.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C55LA	-	VDD5510LCTA	Vdet-IC	5.5V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C55MA	-	VDD5510MCTA	Vdet-IC	5.5V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C55SA	-	VDD5510SCTA	Vdet-IC	5.5V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C55T	-	CM7P61C-55-T	Vdet-IC	5.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C56	-	CM7P611C-56-T	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C56	-	LN61FC2542M	Vdet-IC	2.5V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
C56	-	XC61FC2542M	Vdet-IC	2.5V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
C56	-	XC61HC2542MR	Vdet-IC	2.5V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
C56	cm	XC6381A561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C561A	-	VDA5610CTA	Vdet-IC	5.6V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C56B	-	FC61C562MG	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C56B	-	ML61C562M	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C56C	-	CM7P62C-56-T	Vdet-IC	5.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C56LA	-	VDD5610LCTA	Vdet-IC	5.6V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C56MA	-	VDD5610MCTA	Vdet-IC	5.6V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C56SA	-	VDD5610SCTA	Vdet-IC	5.6V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C56T	-	CM7P61C-56-T	Vdet-IC	5.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C57	-	CM7P611C-57-T	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C57	-	LN61FC2552M	Vdet-IC	2.5V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
C57	-	XC61FC2552M	Vdet-IC	2.5V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
C57	-	XC61HC2552MR	Vdet-IC	2.5V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
C57	cm	XC6381A571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C571A	-	VDA5710CTA	Vdet-IC	5.7V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C57B	-	FC61C572MG	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C57B	-	ML61C572M	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C57C	-	CM7P62C-57-T	Vdet-IC	5.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C57LA	-	VDD5710LCTA	Vdet-IC	5.7V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C57MA	-	VDD5710MCTA	Vdet-IC	5.7V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C57SA	-	VDD5710SCTA	Vdet-IC	5.7V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C57T	-	CM7P61C-57-T	Vdet-IC	5.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C58	-	CM7P611C-58-T	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C58	cm	XC6381A581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C581A	-	VDA5810CTA	Vdet-IC	5.8V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C58B	-	FC61C582MG	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C58B	-	ML61C582M	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C58C	-	CM7P62C-58-T	Vdet-IC	5.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C58LA	-	VDD5810LCTA	Vdet-IC	5.8V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C58MA	-	VDD5810MCTA	Vdet-IC	5.8V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C58SA	-	VDD5810SCTA	Vdet-IC	5.8V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C58T	-	CM7P61C-58-T	Vdet-IC	5.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C59	-	CM7P611C-59-T	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C59	cm	XC6381A591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C591A	-	VDA5910CTA	Vdet-IC	5.9V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C59B	-	FC61C592MG	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C59B	-	ML61C592M	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C59C	-	CM7P62C-59-T	Vdet-IC	5.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C59LA	-	VDD5910LCTA	Vdet-IC	5.9V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C59MA	-	VDD5910MCTA	Vdet-IC	5.9V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C59SA	-	VDD5910SCTA	Vdet-IC	5.9V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C59T	-	CM7P61C-59-T	Vdet-IC	5.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C5A	-	ILC5062AIC25X	Vdet-IC	2.5V±1%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
C5A	-	ILC5062AM25X	Vdet-IC	2.5V±1%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
C5A	-	ZDC834ATA	C-diode	Dual, VHF/UHF-Tuning, 25V, 330mW, 47pF(2V), ΔC=±10%	SOT-323	16dg	-	3a	Zx
C5C	-	KIC3201T-25	LVR-IC	LDO, 2.5V±2%, 400mA	TSM	16cg	VR1	3f	Kec
C6	-	2SA811-6	Si-pnp	AF, Hi-beta, 50V, 30mA, 200mW, B=200..400, 100MHz	SOT-23	16ta	-	3a	Nec
C6	-	AP130-47TW	LVR-IC	LDO, 4.7V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
C6	-	AP130-47W	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
C6	-	AP8821C-26GC	Vdet-IC	2.6V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
C6	-	AP8821C-26GT	Vdet-IC	2.6V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
C6	-	AP8821C-26PC	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
C6	-	AP8821C-26PT	Vdet-IC	2.6V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
C6	-	APE6812N-F	Vdet-IC	2.63V±2%, +Reset PPO	SOT-23	16vda	VD7	3b	Ape
C6	-	APE6812U-F	Vdet-IC	2.63V±2%, +Reset PPO	SC-70	16vda	VD7	3b	Ape
C6	-	AX6904FR	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Axl
C6	-	ELM89261B	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
C6	-	ELM9726NBB	Vdet-IC	2.6V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
C6	-	ILC5062IC26X	Vdet-IC	2.6V±2%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
C6	-	ILC5062M26X	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
C6	-	KTA2017-6	Si-pnp	AF, LN, 120V, 100mA, 100mW, B=200.400, 100MHz	USM	16ta	-	3a	Kec
C6	-	MMBA811C6	Si-pnp	AF, LN, 50V, 50mA, 350mW, B=200..400, >75MHz	SOT-23	16ta	-	3a	Sam
C6	-	R3111N262A	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
C6	-	R3113D361A	Vdet-IC	3.6V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
C6	-	R3130N36EC	Vdet-IC	3.6V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
C6	-	RT9161A-33CV	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-23	16cg	VR1	3a	Rct
C6	-	TC54VC2602ECB	Vdet-IC	2.6V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
C6-	-	RT9161A-33PV	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-23	16cg	VR1	3a	Rct
C60	-	CM7P611C-60-T	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C60	cm	XC6381A601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C601A	-	VDA6010CTA	Vdet-IC	6.0V±1%, -Reset PPO	SOT-23	16vdb	VD7	3p	Ans
C609	-	BL8506-09CRM	Vdet-IC	0.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C609	-	LC9006CB3TR09C	Vdet-IC	0.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C60B	-	FC61C602MG	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C60B	-	ML61C602M	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C60C	-	CM7P62C-60-T	Vdet-IC	6.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C60LA	-	VDD6010LCTA	Vdet-IC	6.0V±1%, -Reset PPO, 80..400ms	SOT-23	16vdb	VD7	3p	Ans
C60MA	-	VDD6010MCTA	Vdet-IC	6.0V±1%, -Reset PPO, 50..200ms	SOT-23	16vdb	VD7	3p	Ans
C60SA	-	VDD6010SCTA	Vdet-IC	6.0V±1%, -Reset PPO, 10..50ms	SOT-23	16vdb	VD7	3p	Ans
C60T	-	CM7P61C-60-T	Vdet-IC	6.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C61	-	CM7P611C-61-T	Vdet-IC	6.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C61	-	LN809C2651M	Vdet-IC	2.63V±1%, Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Nln
C61	cm	XC6381A611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C610	-	BL8506-10CRM	Vdet-IC	1.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C610	-	LC9006CB3TR10C	Vdet-IC	1.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C611	-	BL8506-11CRM	Vdet-IC	1.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C611	-	LC9006CB3TR11C	Vdet-IC	1.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C612	-	BL8506-12CRM	Vdet-IC	1.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C612	-	LC9006CB3TR12C	Vdet-IC	1.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C613	-	BL8506-13CRM	Vdet-IC	1.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C613	-	LC9006CB3TR13C	Vdet-IC	1.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C614	-	BL8506-14CRM	Vdet-IC	1.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C614	-	LC9006CB3TR14C	Vdet-IC	1.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C615	-	BL8506-15CRM	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C615	-	LC9006CB3TR15C	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C616	-	BL8506-16CRM	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C616	-	LC9006CB3TR16C	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C617	-	BL8506-17CRM	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C617	-	LC9006CB3TR17C	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C618	-	BL8506-18CRM	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C618	-	LC9006CB3TR18C	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C619	-	BL8506-19CRM	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C619	-	LC9006CB3TR19C	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C61B	-	FC61C612MG	Vdet-IC	6.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C61B	-	ML61C612M	Vdet-IC	6.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C61C	-	CM7P62C-61-T	Vdet-IC	6.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C61T	-	CM7P61C-61-T	Vdet-IC	6.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C62	-	CM7P611C-62-T	Vdet-IC	6.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C62	cm	XC6381A621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C620	-	BL8506-20CRM	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C620	-	LC9006CB3TR20C	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C621	-	BL8506-21CRM	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C621	-	LC9006CB3TR21C	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C622	-	BL8506-22CRM	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C622	-	LC9006CB3TR22C	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C623	-	BL8506-23CRM	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C623	-	LC9006CB3TR23C	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C624	-	BL8506-24CRM	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C624	-	LC9006CB3TR24C	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C625	-	BL8506-25CRM	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C625	-	LC9006CB3TR25C	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C626	-	BL8506-26CRM	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C626	-	LC9006CB3TR26C	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C627	-	BL8506-27CRM	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C627	-	LC9006CB3TR27C	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C628	-	BL8506-28CRM	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C628	-	LC9006CB3TR28C	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C629	-	BL8506-29CRM	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C629	-	LC9006CB3TR29C	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C62B	-	FC61C622MG	Vdet-IC	6.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C62B	-	ML61C622M	Vdet-IC	6.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C62C	-	CM7P62C-62-T	Vdet-IC	6.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C62T	-	CM7P61C-62-T	Vdet-IC	6.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C63	-	CM7P611C-63-T	Vdet-IC	6.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C63	-	XC61CC2602M	Vdet-IC	2.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
C63	-	XE61CC2645MR	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
C63	cm	XC6381A631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C630	-	BL8506-30CRM	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C630	-	LC9006CB3TR30C	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C631	-	BL8506-31CRM	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C631	-	LC9006CB3TR31C	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C632	-	BL8506-32CRM	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C632	-	LC9006CB3TR32C	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C633	-	BL8506-33CRM	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C633	-	LC9006CB3TR33C	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C634	-	BL8506-34CRM	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C634	-	LC9006CB3TR34C	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C635	-	BL8506-35CRM	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C635	-	LC9006CB3TR35C	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C636	-	BL8506-36CRM	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C636	-	LC9006CB3TR36C	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C637	-	BL8506-37CRM	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C637	-	LC9006CB3TR37C	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C638	-	BL8506-38CRM	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C638	-	LC9006CB3TR38C	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C639	-	BL8506-39CRM	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C639	-	LC9006CB3TR39C	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C63B	-	FC61C632MG	Vdet-IC	6.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C63B	-	ML61C632M	Vdet-IC	6.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C63C	-	CM7P62C-63-T	Vdet-IC	6.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C63T	-	CM7P61C-63-T	Vdet-IC	6.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C64	-	CM7P611C-64-T	Vdet-IC	6.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C64	-	LN809C2641M	Vdet-IC	2.63V±1%, Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Nln
C64	cm	XC6381A641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C640	-	BL8506-40CRM	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C640	-	LC9006CB3TR40C	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C641	-	BL8506-41CRM	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C641	-	LC9006CB3TR41C	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C642	-	BL8506-42CRM	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C642	-	LC9006CB3TR42C	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C643	-	BL8506-43CRM	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C643	-	LC9006CB3TR43C	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C644	-	BL8506-44CRM	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C644	-	LC9006CB3TR44C	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C645	-	BL8506-45CRM	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C645	-	LC9006CB3TR45C	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C646	-	BL8506-46CRM	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C646	-	LC9006CB3TR46C	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C647	-	BL8506-47CRM	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C647	-	LC9006CB3TR47C	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C648	-	BL8506-48CRM	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C648	-	LC9006CB3TR48C	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C649	-	BL8506-49CRM	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C649	-	LC9006CB3TR49C	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C64B	-	FC61C642MG	Vdet-IC	6.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C64B	-	ML61C642M	Vdet-IC	6.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C64C	-	CM7P62C-64-T	Vdet-IC	6.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C64T	-	CM7P61C-64-T	Vdet-IC	6.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C65	-	CM7P611C-65-T	Vdet-IC	6.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C65	-	LN61FC2612M	Vdet-IC	2.6V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
C65	-	LN809C2611M	Vdet-IC	2.63V±1%, Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Nln
C65	-	XC61FC2612M	Vdet-IC	2.6V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
C65	-	XC61HC2612MR	Vdet-IC	2.6V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
C65	cm	XC6381A651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C650	-	BL8506-50CRM	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C650	-	LC9006CB3TR50C	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C651	-	BL8506-51CRM	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C651	-	LC9006CB3TR51C	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C652	-	BL8506-52CRM	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C652	-	LC9006CB3TR52C	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C653	-	BL8506-53CRM	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C653	-	LC9006CB3TR53C	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C654	-	BL8506-54CRM	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C654	-	LC9006CB3TR54C	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C655	-	BL8506-55CRM	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C655	-	LC9006CB3TR55C	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C656	-	BL8506-56CRM	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C656	-	LC9006CB3TR56C	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C657	-	BL8506-57CRM	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C657	-	LC9006CB3TR57C	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C658	-	BL8506-58CRM	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C658	-	LC9006CB3TR58C	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C659	-	BL8506-59CRM	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C659	-	LC9006CB3TR59C	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C65B	-	FC61C652MG	Vdet-IC	6.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C65B	-	ML61C652M	Vdet-IC	6.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C65C	-	CM7P62C-65-T	Vdet-IC	6.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C65T	-	CM7P61C-65-T	Vdet-IC	6.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C66	-	CM7P611C-66-T	Vdet-IC	6.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C66	-	LN61FC2642M	Vdet-IC	2.6V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
C66	-	XC61FC2642M	Vdet-IC	2.6V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
C66	-	XC61HC2642MR	Vdet-IC	2.6V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
C66	cm	XC6381A661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C660	-	BL8506-60CRM	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Shb
C660	-	LC9006CB3TR60C	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Lch
C66B	-	FC61C662MG	Vdet-IC	6.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C66B	-	ML61C662M	Vdet-IC	6.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C66C	-	CM7P62C-66-T	Vdet-IC	6.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C66T	-	CM7P61C-66-T	Vdet-IC	6.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C67	-	CM7P611C-67-T	Vdet-IC	6.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C67	-	LN61FC2652M	Vdet-IC	2.6V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
C67	-	XC61FC2652M	Vdet-IC	2.6V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
C67	-	XC61HC2652MR	Vdet-IC	2.6V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
C67	cm	XC6381A671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C67B	-	FC61C672MG	Vdet-IC	6.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C67B	-	ML61C672M	Vdet-IC	6.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C67C	-	CM7P62C-67-T	Vdet-IC	6.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C67T	-	CM7P61C-67-T	Vdet-IC	6.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C68	-	CM7P611C-68-T	Vdet-IC	6.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C68	cm	XC6381A681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C68B	-	FC61C682MG	Vdet-IC	6.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C68B	-	ML61C682M	Vdet-IC	6.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C68C	-	CM7P62C-68-T	Vdet-IC	6.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C68T	-	CM7P61C-68-T	Vdet-IC	6.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C69	-	CM7P611C-69-T	Vdet-IC	6.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C69	cm	XC6381A691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C69B	-	FC61C692MG	Vdet-IC	6.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C69B	-	ML61C692M	Vdet-IC	6.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C69C	-	CM7P62C-69-T	Vdet-IC	6.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C69T	-	CM7P61C-69-T	Vdet-IC	6.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C6A	-	ILC5062AIC26X	Vdet-IC	2.6V±1%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
C6A	-	ILC5062AM26X	Vdet-IC	2.6V±1%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
C6C	-	KIC3201T-26	LVR-IC	LDO, 2.6V±2%, 400mA	TSM	16cg	VR1	3f	Kec
C7	-	2SA811-7	Si-pnp	AF, Hi-beta, 50V, 30mA, 200mW, B=300..600, 100MHz	SOT-23	16ta	-	3a	Nec
C7	-	2SC5231-7	Si-npn	VHF/UHF, LN, 20V, 70mA, 100mW, B=60..120, 7GHz	SMCP	16ta	-	3a	San
C7	-	AP130-48TW	LVR-IC	LDO, 4.8V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
C7	-	AP130-48W	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
C7	-	AP8821C-27GC	Vdet-IC	2.7V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
C7	-	AP8821C-27GT	Vdet-IC	2.7V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
C7	-	AP8821C-27PC	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
C7	-	AP8821C-27PT	Vdet-IC	2.7V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
C7	-	APE6812N-G	Vdet-IC	2.25V±2%, +Reset PPO	SOT-23	16vda	VD7	3b	Ape
C7	-	APE6812U-G	Vdet-IC	2.25V±2%, +Reset PPO	SC-70	16vda	VD7	3b	Ape
C7	-	AX6904GR	Vdet-IC	2.25V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3b	Axl
C7	-	ELM89271B	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
C7	-	ELM9727NBB	Vdet-IC	2.7V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
C7	-	ILC5062IC27X	Vdet-IC	2.7V±2%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
C7	-	ILC5062M27X	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
C7	-	KN4L4M	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1/R2=47k/47k	SOT-416	16ta	-	3a	Nec
C7	-	MMBA811C7	Si-pnp	AF, LN, 50V, 50mA, 350mW, B=300..600, >75MHz	SOT-23	16ta	-	3a	Sam
C7	-	R3111N272A	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
C7	-	R3113D371A	Vdet-IC	3.7V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
C7	-	R3130N37EC	Vdet-IC	3.7V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
C7	-	RT9161-165CV	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
C7	-	TC54VC2702ECB	Vdet-IC	2.7V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
C70	-	CM7P611C-70-T	Vdet-IC	7.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Can
C70	cm	XC6381A701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 155kHz	SOT-23	16ss	DC2	3d	Tor
C70B	-	FC61C702MG	Vdet-IC	7.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Fis
C70B	-	ML61C702M	Vdet-IC	7.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
C70C	-	CM7P62C-70-T	Vdet-IC	7.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C70T	-	CM7P61C-70-T	Vdet-IC	7.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3a	Can
C73	-	XC61CC2702M	Vdet-IC	2.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
C73	-	XE61CC2745MR	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
C75	-	LN61FC2712M	Vdet-IC	2.7V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
C75	-	XC61FC2712M	Vdet-IC	2.7V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
C75	-	XC61HC2712MR	Vdet-IC	2.7V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
C76	-	LN61FC2742M	Vdet-IC	2.7V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
C76	-	XC61FC2742M	Vdet-IC	2.7V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
C76	-	XC61HC2742MR	Vdet-IC	2.7V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
C77	-	LN61FC2752M	Vdet-IC	2.7V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
C77	-	XC61FC2752M	Vdet-IC	2.7V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
C77	-	XC61HC2752MR	Vdet-IC	2.7V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
C7A	-	ILC5062AIC27X	Vdet-IC	2.7V±1%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
C7A	-	ILC5062AM27X	Vdet-IC	2.7V±1%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
C7C	-	KIC3201T-27	LVR-IC	LDO, 2.7V±2%, 400mA	TSM	16cg	VR1	3f	Kec
C7H	-	CMPT5179	Si-npn	VHF, 20V, 500mW, 350mW, B>25, >900MHz	SOT-23	16ta	-	3a	Cen



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C7p	-	BCF29	Si-pnp	GP, AF, LN, 32V, 200mA, 200mW, B=120..260, >100MHz	SOT-23	16ta	-	3a	Phi
C8	-	2SA811-8	Si-pnp	AF, Hi-beta, 50V, 30mA, 200mW, B=450..900, 100MHz	SOT-23	16ta	-	3a	Nec
C8	-	2SC5231-8	Si-npn	VHF/UHF, LN, 20V, 70mA, 100mW, B=90..180, 7GHz	SMCP	16ta	-	3a	San
C8	-	AP130-49TW	LVR-IC	LDO, 4.9V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
C8	-	AP130-49W	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
C8	-	AP8821C-28GC	Vdet-IC	2.8V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
C8	-	AP8821C-28GT	Vdet-IC	2.8V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
C8	-	AP8821C-28PC	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
C8	-	AP8821C-28PT	Vdet-IC	2.8V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
C8	-	BCF30	Si-pnp	GP, AF, LN, 32V, 200mA, 200mW, B=215..500, >100MHz	SOT-23	16ta	-	3a	Ste
C8	-	BZX84C2V4	Z-diode	2.2..2.6V, Zzt=100Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
C8	-	ELM89281B	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
C8	-	ELM9728NBB	Vdet-IC	2.8V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
C8	-	ILC5062IC28X	Vdet-IC	2.8V±2%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
C8	-	ILC5062M28X	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
C8	-	KTA2017-8	Si-pnp	AF, LN, 120V, 100mA, 100mW, B=350..700, 100MHz	USM	16ta	-	3a	Kec
C8	-	MMBA811C8	Si-pnp	AF, LN, 50V, 50mA, 350mW, B=450..900, >75MHz	SOT-23	16ta	-	3a	Sam
C8	-	R3111N282A	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
C8	-	R3113D381A	Vdet-IC	3.8V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
C8	-	R3130N38EC	Vdet-IC	3.8V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
C8	-	TC54VC2802ECB	Vdet-IC	2.8V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
C8-	-	RT9161A-18PV	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-23	16cg	VR1	3a	Rct
C809J	-	CYT809J	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Cyt
C809L	-	CYT809L	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Cyt
C809M	-	CYT809M	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Cyt
C809R	-	CYT809R	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Cyt
C809S	-	CYT809S	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Cyt
C809T	-	CYT809T	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Cyt
C83	-	XC61CC2802M	Vdet-IC	2.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
C83	-	XE61CC2845MR	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
C85	-	LN61FC2812M	Vdet-IC	2.8V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
C85	-	XC61FC2812M	Vdet-IC	2.8V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
C85	-	XC61HC2812MR	Vdet-IC	2.8V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
C86	-	LN61FC2842M	Vdet-IC	2.8V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
C86	-	XC61FC2842M	Vdet-IC	2.8V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
C86	-	XC61HC2842MR	Vdet-IC	2.8V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
C87	-	LN61FC2852M	Vdet-IC	2.8V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
C87	-	XC61FC2852M	Vdet-IC	2.8V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
C87	-	XC61HC2852MR	Vdet-IC	2.8V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
C8A	-	CMPZ5226B	Z-diode	3.3V±2.5%, Izt=20mA, Zzt=28Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8A	-	ILC5062AIC28X	Vdet-IC	2.8V±1%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
C8A	-	ILC5062AM28X	Vdet-IC	2.8V±1%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
C8B	-	CMPZ5227B	Z-diode	3.6V±2.5%, Izt=20mA, Zzt=24Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8C	-	CMPZ5228B	Z-diode	3.9V±2.5%, Izt=20mA, Zzt=23Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8C	-	KIC3201T-28	LVR-IC	LDO, 2.8V±2%, 400mA	TSM	16cg	VR1	3f	Kec
C8D	-	CMPZ5229B	Z-diode	4.3V±2.5%, Izt=20mA, Zzt=22Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8E	-	CMPZ5230B	Z-diode	4.7V±2.5%, Izt=20mA, Zzt=19Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8F	-	CMPZ5231B	Z-diode	5.1V±2.5%, Izt=20mA, Zzt=17Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8G	-	CMPZ5232B	Z-diode	5.6V±2.5%, Izt=20mA, Zzt=11Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8H	-	CMPZ5233B	Z-diode	6.0V±2.5%, Izt=20mA, Zzt=7Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8J	-	CMPZ5234B	Z-diode	6.2V±2.5%, Izt=20mA, Zzt=7Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8K	-	CMPZ5235B	Z-diode	6.8V±2.5%, Izt=20mA, Zzt=5Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8L	-	CMPZ5236B	Z-diode	7.5V±2.5%, Izt=20mA, Zzt=6Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8M	-	CMPZ5237B	Z-diode	8.2V±2.5%, Izt=20mA, Zzt=8Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8N	-	CMPZ5238B	Z-diode	8.7V±2.5%, Izt=20mA, Zzt=8Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8p	-	BCF30	Si-pnp	GP, AF, LN, 32V, 200mA, 200mW, B=215..500, >100MHz	SOT-23	16ta	-	3a	Phi
C8P	-	CMPZ5239B	Z-diode	9.1V±2.5%, Izt=20mA, Zzt=10Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8Q	-	CMPZ5240B	Z-diode	10V±2.5%, Izt=20mA, Zzt=17Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8R	-	CMPZ5241B	Z-diode	11V±2.5%, Izt=20mA, Zzt=22Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8S	-	CMPZ5242B	Z-diode	12V±2.5%, Izt=20mA, Zzt=30Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8T	-	CMPZ5243B	Z-diode	13V±2.5%, Izt=9.5mA, Zzt=13Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8U	-	CMPZ5244B	Z-diode	14V±2.5%, Izt=9.0mA, Zzt=15Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8V	-	CMPZ5245B	Z-diode	15V±2.5%, Izt=8.5mA, Zzt=16Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8W	-	CMPZ5246B	Z-diode	16V±2.5%, Izt=7.8mA, Zzt=17Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8X	-	CMPZ5247B	Z-diode	17V±2.5%, Izt=7.4mA, Zzt=19Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8Y	-	CMPZ5248B	Z-diode	18V±2.5%, Izt=7.0mA, Zzt=21Ω, 350mW	SOT-23	16dc	-	3a	Cen
C8Z	-	CMPZ5249B	Z-diode	19V±2.5%, Izt=6.6mA, Zzt=23Ω, 350mW	SOT-23	16dc	-	3a	Cen
C9	-	1SS307	Si-diode	Rectifer, 35V, 100mA, Vf<1.3V(100mA), <6pF	SOT-23	16dr	-	3a	Tos
C9	-	2SC5231-9	Si-npn	VHF/UHF, LN, 20V, 70mA, 100mW, B=135..270, 7GHz	SMCP	16ta	-	3a	San
C9	-	AP130-50TW	LVR-IC	LDO, 5.0V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C9	-	AP130-50W	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
C9	-	AP8821C-29GC	Vdet-IC	2.9V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
C9	-	AP8821C-29GT	Vdet-IC	2.9V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
C9	-	AP8821C-29PC	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
C9	-	AP8821C-29PT	Vdet-IC	2.9V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
C9	-	BZX84C11	Z-diode	10.4..11.6V, Zzt=20Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
C9	-	ELM89291B	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
C9	-	ELM9729NBB	Vdet-IC	2.9V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
C9	-	ILC5062IC29X	Vdet-IC	2.9V±2%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
C9	-	ILC5062M29X	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
C9	-	R3111N292A	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
C9	-	R3113D391A	Vdet-IC	3.9V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
C9	-	R3130N39EC	Vdet-IC	3.9V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
C9	-	TC54VC2902ECB	Vdet-IC	2.9V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
C91	-	SST4391	n-FET	Sw, Chopper, 40V, Idss=50mA, 350mW, Up<10V	SOT-23	16fa	-	3a	Lns
C92	-	SST4392	n-FET	Sw, Chopper, 40V, Idss=25mA, 350mW, Up<5V	SOT-23	16fa	-	3a	Lns
C93	-	SST4393	n-FET	Sw, Chopper, 40V, Idss=5mA, 350mW, Up<3V	SOT-23	16fa	-	3a	Lns
C93	-	XC61CC2902M	Vdet-IC	2.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
C93	-	XE61CC2945MR	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
C95	-	LN61FC2912M	Vdet-IC	2.9V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
C95	-	XC61FC2912M	Vdet-IC	2.9V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
C95	-	XC61HC2912MR	Vdet-IC	2.9V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
C96	-	LN61FC2942M	Vdet-IC	2.9V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
C96	-	XC61FC2942M	Vdet-IC	2.9V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
C96	-	XC61HC2942MR	Vdet-IC	2.9V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
C97	-	LN61FC2952M	Vdet-IC	2.9V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
C97	-	XC61FC2952M	Vdet-IC	2.9V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
C97	-	XC61HC2952MR	Vdet-IC	2.9V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
C9A	-	ILC5062AIC29X	Vdet-IC	2.9V±1%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
C9A	-	ILC5062AM29X	Vdet-IC	2.9V±1%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
C9C	-	KIC3201T-29	LVR-IC	LDO, 2.9V±2%, 400mA	TSM	16cg	VR1	3f	Kec
cA	-	BU46K332G	Vdet-IC	3.3V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
Ca	-	APE6809N-H	Vdet-IC	2.70V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ape
Ca	-	APE6809U-H	Vdet-IC	2.25V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Ape
Ca	-	BD48K51G	Vdet-IC	5.1V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
CA	-	2SA1866	Si-pnp-Digi	Mute, Drv, 15V, 50mA, 150mW, 600MHz, R1/R2=47k/47k	SMCP	16ta	-	3a	San
CA	-	AP130-15TW	LVR-IC	LDO, 1.5V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CA	-	AP130-15W	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CA	-	APE6809N-A	Vdet-IC	4.63V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ape
CA	-	APE6809U-A	Vdet-IC	4.63V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Ape
CA	-	AX6901AR	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Axl
CA	-	BB510	C-diode	Dual, AM-Tuning, 10V, 440..600pF(1..9V)	SOT-23	16cz	-	3a	Itt
CA	-	BCW61AR	Si-pnp	AF, 32V, 200mA, 330mW, B=120..220, >180MHz	SOT-23	16te	-	3a	Zx
CA	-	BFS18	Si-npn	HF, 30V, 30mA, 200MHz	SOT-23	16ta	-	3a	Sie
CA	-	FP6809-40NS3P	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Fit
CA	-	GS6332UR19D3	Vdet-IC	1.9V±1.8%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
CA	-	KRC451	Si-npn-Digi	Dual, Sw, 12V, 500mA, 100mW, R1/R2=1k/1k	USM	16ta	-	3f	Kec
CA	-	MMBZ4691	Z-diode	6.2V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
CA	-	MMBZ5257B	Z-diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 350mW	SOT-23	16dc	-	3c	Jiy
CA	-	RN1444A	Si-npn-Digi	Mute, 50V, 300mA, 300mW, R1=5k2, B=200..700	SOT-346	16ta	-	3a	Tos
CA	-	RT9809-27CVL	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
CA	-	SiP6332R19D3	Vdet-IC	1.9V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
CA	-	SST4391	n-FET	Sw, Chopper, 40V, Idss=50mA, 350mW, Up<10V	SOT-23	16fa	-	3a	Six
CA	-	TS3809CXA	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
CA	-	XC62RP2002M	LVR-IC	LDO, 2.0V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
CA-	-	RT9809-27PVL	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
CA9	-	LN61CC1002M	Vdet-IC	1.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAA	-	AME8550AEETA330Z	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3b	Ame
CAA	-	LN61CC1102M	Vdet-IC	1.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAA	cm	AME8550AEETA330L	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3b	Ame
CAB	-	FSP2114C15AD	LVR-IC	LDO, 1.5V±3%, 250mA	SOT-23	16cg	VR1	3b	Fsl
CAB	-	LN61CC1202M	Vdet-IC	1.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAC	-	FSP2114C18AD	LVR-IC	LDO, 1.8V±3%, 250mA	SOT-23	16cg	VR1	3b	Fsl
CAC	-	LN61CC1302M	Vdet-IC	1.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAD	-	FSP2114C25AD	LVR-IC	LDO, 2.5V±3%, 250mA	SOT-23	16cg	VR1	3b	Fsl
CAD	-	LN61CC1402M	Vdet-IC	1.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAE	-	FSP2114C26AD	LVR-IC	LDO, 2.6V±3%, 250mA	SOT-23	16cg	VR1	3b	Fsl
CAE	-	LN61CC1502M	Vdet-IC	1.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAF	-	FSP2114C27AD	LVR-IC	LDO, 2.7V±3%, 250mA	SOT-23	16cg	VR1	3b	Fsl
CAF	-	LN61CC1602M	Vdet-IC	1.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CAG	-	2SA1980SF-G	Si-pnp	GP, 50V, 150mA, 200mW, B=200..400, 80MHz	SOT-23F	18ta	-	3a	Auk
CAG	-	2SA1980S-G	Si-pnp	GP, 50V, 150mA, 200mW, B=200..400, 80MHz	SOT-23	16ta	-	3a	Auk
CAG	-	FSP2114C28AD	LVR-IC	LDO, 2.8V±3%, 250mA	SOT-23	16cg	VR1	3b	Fsl
CAH	-	FSP2114C285AD	LVR-IC	LDO, 2.85V±3%, 250mA	SOT-23	16cg	VR1	3b	Fsl
CAH	-	LN61CC1702M	Vdet-IC	1.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAI	-	FSP2114C30AD	LVR-IC	LDO, 3.0V±3%, 250mA	SOT-23	16cg	VR1	3b	Fsl
CAJ	-	FSP2114C33AD	LVR-IC	LDO, 3.3V±3%, 250mA	SOT-23	16cg	VR1	3b	Fsl
CAK	-	FSP2114C35AD	LVR-IC	LDO, 3.5V±3%, 250mA	SOT-23	16cg	VR1	3b	Fsl
CAK	-	LN61CC1802M	Vdet-IC	1.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAL	-	2SA1980SF-L	Si-pnp	GP, 50V, 150mA, 200mW, B=300..700, 80MHz	SOT-23F	18ta	-	3a	Auk
CAL	-	2SA1980S-L	Si-pnp	GP, 50V, 150mA, 200mW, B=300..700, 80MHz	SOT-23	16ta	-	3a	Auk
CAL	-	FSP2114C36AD	LVR-IC	LDO, 3.6V±3%, 250mA	SOT-23	16cg	VR1	3b	Fsl
CAL	-	LN61CC1902M	Vdet-IC	1.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAM	-	LN61CC2002M	Vdet-IC	2.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAN	-	LN61CC2102M	Vdet-IC	2.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAO	-	2SA1980SF-O	Si-pnp	GP, 50V, 150mA, 200mW, B=70..140, 80MHz	SOT-23F	18ta	-	3a	Auk
CAO	-	2SA1980S-O	Si-pnp	GP, 50V, 150mA, 200mW, B=70..140, 80MHz	SOT-23	16ta	-	3a	Auk
CAP	-	LN61CC2202M	Vdet-IC	2.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAR	-	AME8570BEETBF30Z	Vdet-IC	3.0V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Ame
CAR	-	LN61CC2302M	Vdet-IC	2.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAR	cm	AME8570BEETBF30L	Vdet-IC	3.0V±1.5%, -Reset ODO, lead free	SOT-23	16vdb	VD6	3b	Ame
CAS	-	LN61CC2402M	Vdet-IC	2.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAT	-	LN61CC2502M	Vdet-IC	2.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAU	-	LN61CC2602M	Vdet-IC	2.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAV	-	LN61CC2702M	Vdet-IC	2.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAX	-	LN61CC2802M	Vdet-IC	2.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAY	-	2SA1980SF-Y	Si-pnp	GP, 50V, 150mA, 200mW, B=120..240, 80MHz	SOT-23F	18ta	-	3a	Auk
CAY	-	2SA1980S-Y	Si-pnp	GP, 50V, 150mA, 200mW, B=120..240, 80MHz	SOT-23	16ta	-	3a	Auk
CAY	-	LN61CC2902M	Vdet-IC	2.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CAZ	-	LN61CC3002M	Vdet-IC	3.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
cB	-	BU46K342G	Vdet-IC	3.4V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
Cb	-	APE6809N-I	Vdet-IC	4.25V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ape
Cb	-	APE6809U-I	Vdet-IC	4.25V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Ape
Cb	-	BD48K52G	Vdet-IC	5.2V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
CB	-	2SC4997	Si-npn	HF/Sw, Hi-beta, 15V, 100mA, 150mW, B=560..2700, 240MHz	SOT-416	16ta	-	3a	Rhm
CB	-	2SC4998	Si-npn	HF/Sw, Hi-beta, 15V, 100mA, 200mW, B=560..2700, 240MHz	UMT3	16ta	-	3a	Rhm
CB	-	AP130-16TW	LVR-IC	LDO, 1.6V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CB	-	AP130-16W	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CB	-	APE6809N-B	Vdet-IC	4.38V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ape
CB	-	APE6809U-B	Vdet-IC	4.38V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Ape
CB	-	AX6901BR	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Axl
CB	-	BAS40-04LT1	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dl	-	3aa	Ons
CB	-	BCW61BR	Si-pnp	AF, 32V, 200mA, 330mW, B=180..310, >180MHz	SOT-23	16te	-	3a	Zx
CB	-	BFS19	Si-npn	RF, 30V, 30mA, 250mW, B=65..225, 260MHz	SOT-23	16ta	-	3a	Sie
CB	-	FP6809-44NS3P	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Fit
CB	-	GS6332UR20D1	Vdet-IC	2.0V±1.8%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
CB	-	KRC452	Si-npn-Digi	Dual, Sw, 12V, 500mA, 100mW, R1/R2=2.2k/2.2k	USM	16ta	-	3f	Kec
CB	-	MMBZ5258B	Z-diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 350mW	SOT-23	16dc	-	3c	Jiy
CB	-	RN1444B	Si-npn-Digi	Mute, 50V, 300mA, 300mW, R1=5k2, B=350..1200	SOT-346	16ta	-	3a	Tos
CB	-	RT9169-15CVL	LVR-IC	LDO, 1.5V±2%, 100mA	SOT-23	16cg	VR1	3a	Rct
CB	-	SiP6332R20D1	Vdet-IC	2.0V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
CB	-	SST4392	n-FET	Sw, Chopper, 40V, Idss=25mA, 350mW, Up<5V	SOT-23	16fa	-	3a	Six
CB	-	TS3809CXB	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
CB	-	XC62RP2102M	LVR-IC	LDO, 2.1V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
CB-	-	RT9169-15PVL	LVR-IC	LDO, 1.5V±2%, 100mA	SOT-23	16cg	VR1	3a	Rct
CB0	-	LN61CC3102M	Vdet-IC	3.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CB1	-	LN61CC3202M	Vdet-IC	3.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CB2	-	LN61CC3302M	Vdet-IC	3.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CB3	-	LN61CC3402M	Vdet-IC	3.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CB4	-	LN61CC3502M	Vdet-IC	3.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CB4E	-	DTC114EL-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	Utc
CB4E	-	DTC114EL-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	SOT-323	16ta	-	3a	Utc
CB4E	-	DTC114EL-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=10k/10k	SOT-523	16ta	-	3a	Utc
CB4E	df	DTC114EG-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k, Halogen free	SOT-23	16ta	-	3a	Utc
CB4E	df	DTC114EG-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k, Halogen free	SOT-323	16ta	-	3a	Utc
CB4E	df	DTC114EG-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=10k/10k, Halogen free	SOT-523	16ta	-	3a	Utc
CB4T	-	DTC113TL-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=1k	SOT-23	16ta	-	3a	Utc
CB4T	-	DTC113TL-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=1k	SOT-323	16ta	-	3a	Utc
CB4T	-	DTC113TL-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=1k	SOT-523	16ta	-	3a	Utc
CB4T	-	DTC114TL-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	SOT-23	16ta	-	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CB4T	-	DTC114TL-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	SOT-323	16ta	-	3a	Utc
CB4T	-	DTC114TL-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=10k	SOT-523	16ta	-	3a	Utc
CB4T	df	DTC113TG-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=1k, Halogen free	SOT-23	16ta	-	3a	Utc
CB4T	df	DTC113TG-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=1k, Halogen free	SOT-323	16ta	-	3a	Utc
CB4T	df	DTC113TG-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1=1k, Halogen free	SOT-523	16ta	-	3a	Utc
CB4T	df	DTC114TG-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=10k, Halogen free	SOT-23	16ta	-	3a	Utc
CB4T	df	DTC114TG-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=10k, Halogen free	SOT-323	16ta	-	3a	Utc
CB4T	df	DTC114TG-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1=10k, Halogen free	SOT-523	16ta	-	3a	Utc
CB4Y	-	DTC114YL-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/47k	SOT-23	16ta	-	3a	Utc
CB4Y	-	DTC114YL-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/47k	SOT-323	16ta	-	3a	Utc
CB4Y	-	DTC114YL-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=10k/47k	SOT-523	16ta	-	3a	Utc
CB4Y	df	DTC114YG-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/47k, Halogen free	SOT-23	16ta	-	3a	Utc
CB4Y	df	DTC114YG-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/47k, Halogen free	SOT-323	16ta	-	3a	Utc
CB4Y	df	DTC114YG-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=10k/47k, Halogen free	SOT-523	16ta	-	3a	Utc
CB5	-	LN61CC3602M	Vdet-IC	3.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CB5E	-	DTC115EL-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=100k/100k	SOT-23	16ta	-	3a	Utc
CB5E	-	DTC115EL-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=100k/100k	SOT-323	16ta	-	3a	Utc
CB5E	-	DTC115EL-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=100k/100k	SOT-523	16ta	-	3a	Utc
CB5E	df	DTC115EG-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=100k/100k, Halogen free	SOT-23	16ta	-	3a	Utc
CB5E	df	DTC115EG-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=100k/100k, Halogen free	SOT-323	16ta	-	3a	Utc
CB5E	df	DTC115EG-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=100k/100k, Halogen free	SOT-523	16ta	-	3a	Utc
CB5T	-	DTC115TL-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=100k	SOT-23	16ta	-	3a	Utc
CB5T	df	DTC115TG-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=100k, Halogen free	SOT-23	16ta	-	3a	Utc
CB6	-	LN61CC3702M	Vdet-IC	3.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CB7	-	LN61CC3802M	Vdet-IC	3.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CB8	-	LN61CC3902M	Vdet-IC	3.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CB9	-	LN61CC4002M	Vdet-IC	4.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBA	-	LN61CC4102M	Vdet-IC	4.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBB	-	LN61CC4202M	Vdet-IC	4.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBC	-	LN61CC4302M	Vdet-IC	4.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBD	-	LN61CC4402M	Vdet-IC	4.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBE	-	LN61CC4502M	Vdet-IC	4.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBF	-	LN61CC4602M	Vdet-IC	4.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBG	-	2SC3324-GR	Si-npn	AF, LN, 120V, 100mA, 150mW, B=200..400, 100MHz	SC-59	16ta	-	3a	Tos
CBH	-	LN61CC4702M	Vdet-IC	4.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBK	-	LN61CC4802M	Vdet-IC	4.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBL	-	2SC3324-BL	Si-npn	AF, LN, 120V, 100mA, 150mW, B=350..700, 100MHz	SC-59	16ta	-	3a	Tos
CBL	-	LN61CC4902M	Vdet-IC	4.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBM	-	LN61CC5002M	Vdet-IC	5.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBN	-	LN61CC5102M	Vdet-IC	5.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBP	-	LN61CC5202M	Vdet-IC	5.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBR	-	LN61CC5302M	Vdet-IC	5.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBS	-	LN61CC5402M	Vdet-IC	5.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBT	-	LN61CC5502M	Vdet-IC	5.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBU	-	LN61CC5602M	Vdet-IC	5.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBV	-	LN61CC5702M	Vdet-IC	5.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBX	-	LN61CC5802M	Vdet-IC	5.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBY	-	LN61CC5902M	Vdet-IC	5.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
CBZ	-	LN61CC6002M	Vdet-IC	6.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Nln
cC	-	BU46K352G	Vdet-IC	3.5V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
CC	-	2SA1122-C	Si-pnp	GP, AF, 55V, 100mA, 150mW, B=160..320	SOT-23	16ta	-	3a	Ren
CC	-	AP130-17TW	LVR-IC	LDO, 1.7V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CC	-	AP130-17W	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CC	-	APE6809N-C	Vdet-IC	4.00V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ape
CC	-	APE6809U-C	Vdet-IC	4.00V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Ape
CC	-	AX6901CR	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Axl
CC	-	BCW61CR	Si-pnp	AF, 32V, 200mA, 330mW, B=250..460, >180MHz	SOT-23	16te	-	3a	Zx
CC	-	BF554	Si-npn	AF, 20V, 30mA, 280mW, B=60..280, >250MHz	SOT-23	16ta	-	3a	Sie
CC	-	FP6809-46NS3P	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD7	3a	Fit
CC	-	GS6332UR20D2	Vdet-IC	2.0V±1.8%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
CC	-	KRC453	Si-npn-Digi	Dual, Sw, 12V, 500mA, 100mW, R1/R2=4.7k/ 4.7k	USM	16ta	-	3f	Kec
CC	-	MMBZ5259B	Z-diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 350mW	SOT-23	16dc	-	3c	Jiy
CC	-	RT9169-21CVL	LVR-IC	LDO, 2.1V±2%, 100mA	SOT-23	16cg	VR1	3a	Rct
CC	-	SiP6332R20D2	Vdet-IC	2.0V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
CC	-	SST4393	n-FET	Sw, Chopper, 40V, Idss=5mA, 350mW, Up<3V	SOT-23	16fa	-	3a	Six
CC	-	TS3809CXC	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
CC	-	XC62RP2202M	LVR-IC	LDO, 2.2V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
CC	-	ZMDC831BTA	C-diode	Dual, VHF/UHF-Tuning, 25V, 330mW, 15pF(2V), ΔC=±5%	SOT-23	16dg	-	3a	Zx
CC10	-	CMPZDC27V	Z-diode	Dual, 27V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CC11	-	CMPZDC30V	Z-diode	Dual, 30V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CC12	-	CMPZDC33V	Z-diode	Dual, 33V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CC13	-	CMPZDC36V	Z-diode	Dual, 36V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CC14	-	CMPZDC39V	Z-diode	Dual, 39V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CC15	-	CMPZDC43V	Z-diode	Dual, 43V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CC16	-	CMPZDC47V	Z-diode	Dual, 47V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CC3J	-	DTC123JL-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2.2k/47k	SOT-23	16ta	-	3a	Utc
CC3J	-	DTC123JL-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2.2k/47k	SOT-323	16ta	-	3a	Utc
CC3J	-	DTC123JL-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2.2k/47k	SOT-523	16ta	-	3a	Utc
CC3J	df	DTC123JG-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k, Halogen free	SOT-23	16ta	-	3a	Utc
CC3J	df	DTC123JG-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k, Halogen free	SOT-323	16ta	-	3a	Utc
CC3J	df	DTC123JG-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=2.2k/47k, Halogen free	SOT-523	16ta	-	3a	Utc
CC3Y	-	DTC123YL-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	Utc
CC3Y	-	DTC123YL-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2.2k/10k	SOT-323	16ta	-	3a	Utc
CC3Y	-	DTC123YL-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2.2k/10k	SOT-523	16ta	-	3a	Utc
CC3Y	df	DTC123YG-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k, Halogen free	SOT-23	16ta	-	3a	Utc
CC3Y	df	DTC123YG-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k, Halogen free	SOT-323	16ta	-	3a	Utc
CC3Y	df	DTC123YG-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=2.2k/10k, Halogen free	SOT-523	16ta	-	3a	Utc
CC4E	-	DTC124EL-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SOT-23	16ta	-	3a	Utc
CC4E	-	DTC124EL-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SOT-323	16ta	-	3a	Utc
CC4E	-	DTC124EL-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=22k/22k	SOT-523	16ta	-	3a	Utc
CC4E	df	DTC124EG-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k, Halogen free	SOT-23	16ta	-	3a	Utc
CC4E	df	DTC124EG-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k, Halogen free	SOT-323	16ta	-	3a	Utc
CC4E	df	DTC124EG-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=22k/22k, Halogen free	SOT-523	16ta	-	3a	Utc
CC4T	-	DTC124TL-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=22k	SOT-23	16ta	-	3a	Utc
CC4T	df	DTC124TG-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=22k, Halogen free	SOT-23	16ta	-	3a	Utc
CCA	-	2SC3326A	Si-npn	Muting, Sw, 50V, 300mA, 150mW, B=200..700, 30MHz	SC-59	16ta	-	3a	Tos
CCB	-	2SC3326B	Si-npn	Muting, Sw, 50V, 300mA, 150mW, B=350..1200, 30MHz	SC-59	16ta	-	3a	Tos
CCW3	-	CMPZDC2V4	Z-diode	Dual, 2.4V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCW4	-	CMPZDC2V7	Z-diode	Dual, 2.7V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCW5	-	CMPZDC3V0	Z-diode	Dual, 3.0V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCW6	-	CMPZDC3V3	Z-diode	Dual, 3.3V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCW7	-	CMPZDC3V6	Z-diode	Dual, 3.6V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCW8	-	CMPZDC3V9	Z-diode	Dual, 3.9V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCW9	-	CMPZDC4V3	Z-diode	Dual, 4.3V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCY1	-	CMPZDC11V	Z-diode	Dual, 11V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCY2	-	CMPZDC12V	Z-diode	Dual, 12V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCY3	-	CMPZDC13V	Z-diode	Dual, 13V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCY4	-	CMPZDC15V	Z-diode	Dual, 15V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCY5	-	CMPZDC16V	Z-diode	Dual, 16V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCY6	-	CMPZDC18V	Z-diode	Dual, 18V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCY7	-	CMPZDC20V	Z-diode	Dual, 20V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCY8	-	CMPZDC22V	Z-diode	Dual, 22V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCY9	-	CMPZDC24V	Z-diode	Dual, 24V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCZ1	-	CMPZDC4V7	Z-diode	Dual, 4.7V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCZ2	-	CMPZDC5V1	Z-diode	Dual, 5.1V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCZ3	-	CMPZDC5V6	Z-diode	Dual, 5.6V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCZ4	-	CMPZDC6V2	Z-diode	Dual, 6.2V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCZ5	-	CMPZDC6V8	Z-diode	Dual, 6.8V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCZ6	-	CMPZDC7V5	Z-diode	Dual, 7.5V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCZ7	-	CMPZDC8V2	Z-diode	Dual, 8.2V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCZ8	-	CMPZDC9V1	Z-diode	Dual, 9.1V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
CCZ9	-	CMPZDC10V	Z-diode	Dual, 10V±5%, If=10mA, 350mW	SOT-23	16dg	-	3a	Cen
cD	-	BU46K362G	Vdet-IC	3.6V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
Cd	-	APE6810N-H	Vdet-IC	2.25V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ape
Cd	-	APE6810U-H	Vdet-IC	2.25V±2%, +Reset PPO	SC-70	16vdc	VD7	3b	Ape
Cd	-	BD48K54G	Vdet-IC	5.4V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
CD	-	15C02CH	Si-npn	AF, GP, 20V, 1A, 700mW, B=300..600, 440MHz	CPH3	16ta	-	3a	San
CD	-	2SA1122-D	Si-pnp	GP, AF, 55V, 100mA, 150mW, B=250..500	SOT-23	16ta	-	3a	Ren
CD	-	2SA1366-D	Si-pnp	Relay-Drv, 55V, 400mA, 150mW, B=90..180, 150MHz	SOT-23	16ta	-	3a	Mit
CD	-	AP130-18TW	LVR-IC	LDO, 1.8V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CD	-	AP130-18W	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CD	-	APE6809N-D	Vdet-IC	3.08V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ape
CD	-	APE6809U-D	Vdet-IC	3.08V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Ape
CD	-	AX6901DR	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Axl
CD	-	BCW61DR	Si-pnp	AF, 32V, 200mA, 330mW, B=380..630, >180MHz	SOT-23	16te	-	3a	Zx
CD	-	FP6809-23CS3P	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Fit
CD	-	GS6332UR20D3	Vdet-IC	2.0V±1.8%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
CD	-	KRC454	Si-npn-Digi	Dual, Sw, 12V, 500mA, 100mW, R1/R2=10k/10k	USM	16ta	-	3f	Kec
CD	-	MMBZ5260B	Z-diode	43V±5%, Izt=3.0mA, Zzt=93Ω, 350mW	SOT-23	16dc	-	3c	Jiy
CD	-	RT9169-33CVL	LVR-IC	LDO, 3.3V±2%, 100mA	SOT-23	16cg	VR1	3a	Rct



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CD	-	SiP6332R20D3	Vdet-IC	2.0V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
CD	-	TS3809CXD	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
CD	-	UNR31A0	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1=47k	SSSMini3	18ta	-	3a	Pan
CD	-	XC62RP2302M	LVR-IC	LDO, 2.3V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
CD	-	ZMDC832BTA	C-diode	Dual, VHF/UHF-Tuning, 25V, 330mW, 22pF(2V), ΔC=±5%	SOT-23	16dg	-	3a	Zx
CD-	-	RT9169-33PVL	LVR-IC	LDO, 3.3V±2%, 100mA	SOT-23	16cg	VR1	3a	Rct
CD18	-	AIC1734-18CU	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD18G	-	AIC1734-18GU	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD18P	-	AIC1734-18PU	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD18P	-	SS6734-18GU	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CD20	-	AIC1734-20CU	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD20G	-	AIC1734-20GU	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD20P	-	AIC1734-20PU	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD20P	-	SS6734-20GU	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CD25	-	AIC1734-25CU	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD25G	-	AIC1734-25GU	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD25P	-	AIC1734-25PU	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD25P	-	SS6734-25GU	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CD27	-	AIC1734-27CU	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD27G	-	AIC1734-27GU	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD27P	-	AIC1734-27PU	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD27P	-	SS6734-27GU	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CD30	-	AIC1734-30CU	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD30G	-	AIC1734-30GU	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD30P	-	AIC1734-30PU	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD30P	-	SS6734-30GU	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CD33	-	AIC1734-33CU	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD33G	-	AIC1734-33GU	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD33P	-	AIC1734-33PU	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD33P	-	SS6734-33GU	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CD35	-	AIC1734-35CU	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD35G	-	AIC1734-35GU	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD35P	-	AIC1734-35PU	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD35P	-	SS6734-35GU	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CD37	-	AIC1734-37CU	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD37G	-	AIC1734-37GU	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD37P	-	AIC1734-37PU	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD37P	-	SS6734-37GU	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CD38	-	AIC1734-38CU	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD38G	-	AIC1734-38GU	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD38P	-	AIC1734-38PU	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD38P	-	SS6734-38GU	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CD50	-	AIC1734-50CU	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD50G	-	AIC1734-50GU	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD50P	-	AIC1734-50PU	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD50P	-	SS6734-50GU	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CD52	-	AIC1734-52CU	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD52G	-	AIC1734-52GU	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD52P	-	AIC1734-52PU	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-23	16cg	VR1	3a	Aic
CD52P	-	SS6734-52GU	LVR-IC	LDO, 5.2V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CDs	-	BSS81B	Si-npn	Sw, 75V, 800mA, 330mW, B=40..120, 250MHz	SOT-23	16ta	-	3a	Sie
cE	-	BU46K372G	Vdet-IC	3.7V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
cE	-	BU46K462G	Vdet-IC	4.6V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
Ce	-	APE6810N-I	Vdet-IC	4.25V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ape
Ce	-	APE6810U-I	Vdet-IC	4.25V±2%, +Reset PPO	SC-70	16vdc	VD7	3b	Ape
Ce	-	BD48K55G	Vdet-IC	5.5V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
CE	-	2SA1122-E	Si-pnp	GP, AF, 55V, 100mA, 150mW, B=400..800	SOT-23	16ta	-	3a	Ren
CE	-	2SA1366-E	Si-pnp	Relay-Drv, 55V, 400mA, 150mW, B=150..300, 150MHz	SOT-23	16ta	-	3a	Mit
CE	-	2SK2552B-E	n-FET	GP, 20V, 10mA, 100mW, Idss=90..180µA	SOT-23	16fj	-	3a	Nec
CE	-	AP130-19TW	LVR-IC	LDO, 1.9V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CE	-	AP130-19W	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CE	-	APE6809N-E	Vdet-IC	2.93V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ape
CE	-	APE6809U-E	Vdet-IC	2.93V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Ape
CE	-	AX6901ER	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Axl
CE	-	BCW61ER	Si-pnp	AF, 32V, 200mA, 330mW, B=450..900, >180MHz	SOT-23	16te	-	3a	Zx
CE	-	BSS79B	Si-npn	Sw, 75V, 800mA, 330mW, B=40..120, >250MHz	SOT-23	16ta	-	3a	Zx
CE	-	CPH3205	Si-npn	Relay-Drv, 100V, 3A, 900mW, B=200..560, 380MHz	CPH3	16ta	-	3a	San
CE	-	FP6809-26CS3P	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Fit
CE	-	GS6332UR21D1	Vdet-IC	2.1V±1.8%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
CE	-	KRC455	Si-npn-Digi	Dual, Sw, 12V, 500mA, 100mW, R1/R2=0.47k/10k	USM	16ta	-	3f	Kec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CE	-	MMBZ5261B	Z-diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 350mW	SOT-23	16dc	-	3c	Jiy
CE	-	RT9169-30CVL	LVR-IC	LDO, 3.0V±2%, 100mA	SOT-23	16cg	VR1	3a	Rct
CE	-	SiP6332R21D1	Vdet-IC	2.1V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
CE	-	TS3809CXE	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
CE	-	UNR31A1	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=10k/10k	SSSMini3	18ta	-	3a	Pan
CE	-	XC62RP2402M	LVR-IC	LDO, 2.4V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
CE-	-	RT9169-30PVL	LVR-IC	LDO, 3.0V±2%, 100mA	SOT-23	16cg	VR1	3a	Rct
CE15	-	AIC1735-15CU	LVR-IC	LDO, 1.5V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE15G	-	AIC1735-15GU	LVR-IC	LDO, 1.5V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE15P	-	AIC1735-15PU	LVR-IC	LDO, 1.5V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE18	-	AIC1735-18CU	LVR-IC	LDO, 1.8V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE18G	-	AIC1735-18GU	LVR-IC	LDO, 1.8V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE18P	-	AIC1735-18PU	LVR-IC	LDO, 1.8V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE18P	-	SS6735-18GU	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CE20	-	AIC1735-20CU	LVR-IC	LDO, 2.0V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE20G	-	AIC1735-20GU	LVR-IC	LDO, 2.0V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE20P	-	AIC1735-20PU	LVR-IC	LDO, 2.0V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE20P	-	SS6735-20GU	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CE25	-	AIC1735-25CU	LVR-IC	LDO, 2.5V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE25G	-	AIC1735-25GU	LVR-IC	LDO, 2.5V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE25P	-	AIC1735-25PU	LVR-IC	LDO, 2.5V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE25P	-	SS6735-25GU	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CE27	-	AIC1735-27CU	LVR-IC	LDO, 2.7V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE27G	-	AIC1735-27GU	LVR-IC	LDO, 2.7V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE27P	-	AIC1735-27PU	LVR-IC	LDO, 2.7V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE27P	-	SS6735-27GU	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CE30	-	AIC1735-30CU	LVR-IC	LDO, 3.0V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE30G	-	AIC1735-30GU	LVR-IC	LDO, 3.0V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE30P	-	AIC1735-30PU	LVR-IC	LDO, 3.0V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE30P	-	SS6735-30GU	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CE33	-	AIC1735-33CU	LVR-IC	LDO, 3.3V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE33G	-	AIC1735-33GU	LVR-IC	LDO, 3.3V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE33P	-	AIC1735-33PU	LVR-IC	LDO, 3.3V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE33P	-	SS6735-33GU	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CE35	-	AIC1735-35CU	LVR-IC	LDO, 3.5V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE35G	-	AIC1735-35GU	LVR-IC	LDO, 3.5V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE35P	-	AIC1735-35PU	LVR-IC	LDO, 3.5V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE35P	-	SS6735-35GU	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CE37	-	AIC1735-37CU	LVR-IC	LDO, 3.7V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE37G	-	AIC1735-37GU	LVR-IC	LDO, 3.7V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE37P	-	AIC1735-37PU	LVR-IC	LDO, 3.7V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE37P	-	SS6735-37GU	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CE38	-	AIC1735-38CU	LVR-IC	LDO, 3.8V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE38G	-	AIC1735-38GU	LVR-IC	LDO, 3.8V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE38P	-	AIC1735-38PU	LVR-IC	LDO, 3.8V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE38P	-	SS6735-38GU	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CE3E	-	DTC143EL-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3a	Utc
CE3E	-	DTC143EL-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3a	Utc
CE3E	df	DTC143EG-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k, Halogen free	SOT-23	16ta	-	3a	Utc
CE3E	df	DTC143EG-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k, Halogen free	SOT-323	16ta	-	3a	Utc
CE3T	-	DTC143TL-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4.7k	SOT-23	16ta	-	3a	Utc
CE3T	-	DTC143TL-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4.7k	SOT-323	16ta	-	3a	Utc
CE3T	-	DTC143TL-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=4.7k	SOT-523	16ta	-	3a	Utc
CE3T	df	DTC143TG-AE3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=4.7k, Halogen free	SOT-23	16ta	-	3a	Utc
CE3T	df	DTC143TG-AL3	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=4.7k, Halogen free	SOT-323	16ta	-	3a	Utc
CE3T	df	DTC143TG-AN3	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1=4.7k, Halogen free	SOT-523	16ta	-	3a	Utc
CE50	-	AIC1735-50CU	LVR-IC	LDO, 5.0V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE50G	-	AIC1735-50GU	LVR-IC	LDO, 5.0V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE50P	-	AIC1735-50PU	LVR-IC	LDO, 5.0V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE50P	-	SS6735-50GU	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CE52	-	AIC1735-52CU	LVR-IC	LDO, 5.2V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE52G	-	AIC1735-52GU	LVR-IC	LDO, 5.2V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE52P	-	AIC1735-52PU	LVR-IC	LDO, 5.2V±1%, 500mA	SOT-23	16cg	VR1	3a	Aic
CE52P	-	SS6735-52GU	LVR-IC	LDO, 5.2V±2%, 500mA	SOT-23	16cg	VR1	3a	Ssc
CEO	-	2SC3325-O	Si-npn	AF-Amp, 50V, 500mA, 200mW, B=70..140, 300MHz	SC-59	16ta	-	3a	Tos
CEs	-	BSS79B	Si-npn	Sw, 75V, 800mA, 330mW, B=40..120, 250MHz	SOT-23	16ta	-	3a	Sie
CEY	-	2SC3325-Y	Si-npn	AF-Amp, 50V, 500mA, 200mW, B=120..240, 300MHz	SC-59	16ta	-	3a	Tos
cF	-	BU46K382G	Vdet-IC	3.8V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
Cf	-	APE6811N-H	Vdet-IC	2.25V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Ape
Cf	-	APE6811U-H	Vdet-IC	2.25V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Ape

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Cf	-	BD48K56G	Vdet-IC	5.6V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
CF	-	2SA1366-F	Si-pnp	Relay-Drv, 55V, 400mA, 150mW, B=250..500, 150MHz	SOT-23	16ta	-	3a	Mit
CF	-	2SK2552B-F	n-FET	GP, 20V, 10mA, 100mW, Idss=150..240µA	SOT-23	16fj	-	3a	Nec
CF	-	AP130-20TW	LVR-IC	LDO, 2.0V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CF	-	AP130-20W	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CF	-	APE6809N-F	Vdet-IC	2.63V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ape
CF	-	APE6809U-F	Vdet-IC	2.63V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Ape
CF	-	AX6901FR	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Axl
CF	-	BSS79C	Si-npn	Sw, 75V, 800mA, 330mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Zx
CF	-	CPH3206	Si-npn	DC/DC-Conv, 15V, 3A, 900mW, 380MHz, B=200..560	CPH3	16ta	-	3a	San
CF	-	FP6809-29CS3P	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Fit
CF	-	KRC456	Si-npn-Digi	Dual, Sw, 12V, 500mA, 100mW, R1/R2=1k/10k	USM	16ta	-	3f	Kec
CF	-	MMBZ4681	Z-diode	2.4V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
CF	-	RT9169-12CVL	LVR-IC	LDO, 1.2V±2%, 100mA	SOT-23	16cg	VR1	3a	Rct
CF	-	TS3809CXF	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
CF	-	UNR31A2	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R/R2=22k/22k	SSSMini3	18ta	-	3a	Pan
CF	-	XC62RP2502M	LVR-IC	LDO, 2.5V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
CFs	-	BSS79C	Si-npn	Sw, 75V, 800mA, 330mW, B=100..300, 250MHz	SOT-23	16ta	-	3a	Sie
cG	-	BU46K392G	Vdet-IC	3.9V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
Cg	-	APE6811N-I	Vdet-IC	4.25V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Ape
Cg	-	BD48K57G	Vdet-IC	5.7V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
CG	-	2SA1163-GR	Si-pnp	GP, AF, 120V, 100mA, 150mW, B=200..400, 100MHz	SOT-23	16ta	-	3a	Tos
CG	-	2SA1587-G	Si-pnp	GP, LN, 120V, 120mA, 100mW, B=200..400, >100MHz	SOT-323	16ta	-	3a	Tos
CG	-	2SA1980UF-G	Si-pnp	GP, 50V, 150mA, 200mW, B=200..400, 80MHz	SOT-323F	18ta	-	3a	Auk
CG	-	2SA1980U-G	Si-pnp	GP, 50V, 150mA, 200mW, B=200..400, 80MHz	SOT-323	16ta	-	3a	Auk
CG	-	2SC5343EF-G	Si-npn	GP, 60V, 150mA, 150mW, >80MHz, B=200..400	SOT-523F	18ta	-	3a	Auk
CG	-	2SC5343E-G	Si-npn	GP, 60V, 150mA, 150mW, >80MHz, B=200..400	SOT-523	16ta	-	3a	Auk
CG	-	AP130-21TW	LVR-IC	LDO, 2.1V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CG	-	AP130-21W	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CG	-	APE6809N-G	Vdet-IC	2.25V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ape
CG	-	APE6809U-G	Vdet-IC	2.25V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Ape
CG	-	AX6901GR	Vdet-IC	2.25V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Axl
CG	-	BAS70-04LT1	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dl	-	3a	Ons
CG	-	BCX71GR	Si-pnp	GP, 45V, 100mA, 330mW, B= 120..220, 250MHz	SOT-23	16te	-	3a	Phi
CG	-	BCX71RG	Si-pnp	GP, 45V, 100mA, 330mW, B= 120..220, 250MHz	SOT-23	16ta	-	3a	Zx
CG	-	CPH3207	Si-npn	DC/DC-Conv, 15V, 6A, 900mW, 250MHz, B=200..560	CPH3	16ta	-	3a	San
CG	-	FP6809-31CS3P	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Fit
CG	-	GS6332UR21D2	Vdet-IC	2.1V±1.8%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
CG	-	KRC457	Si-npn-Digi	Dual, Sw, 12V, 500mA, 100mW, R1/R2=2.2k/10k	USM	16ta	-	3f	Kec
CG	-	KTA2017-GR	Si-pnp	AF, LN, 120V, 100mA, 100mW, B=350..700, 100MHz	USM	16ta	-	3a	Kec
CG	-	RT9169-20CVL	LVR-IC	LDO, 2.0V±2%, 100mA	SOT-23	16cg	VR1	3a	Rct
CG	-	SiP6332R21D2	Vdet-IC	2.1V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
CG	-	TS3809CXG	Vdet-IC	2.25V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
CGG	-	2SC3426-GR	Si-npn	GP, 15V, 800mA, 200mW, B=200..400, 120MHz	SOT-23	16ta	-	3a	Tos
CGL	-	2SC3426-BL	Si-npn	GP, 15V, 800mA, 200mW, B=350..700, 120MHz	SOT-23	16ta	-	3a	Tos
CGs	-	BSS81C	Si-npn	Sw, 75V, 800mA, 330mW, B=100..300, 250MHz	SOT-23	16ta	-	3a	Sie
CGY	-	2SC3426-Y	Si-npn	GP, 15V, 800mA, 200mW, B=120..240, 120MHz	SOT-23	16ta	-	3a	Tos
cH	-	BU46K402G	Vdet-IC	4.0V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
Ch	-	APE6812N-H	Vdet-IC	2.25V±2%, +Reset PPO	SOT-23	16vda	VD7	3b	Ape
Ch	-	APE6812U-H	Vdet-IC	2.25V±2%, +Reset PPO	SC-70	16vda	VD7	3b	Ape
Ch	-	BD48K58G	Vdet-IC	5.8V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
CH	-	1SS351	Si-diode	Dual, SBD, UHF-det/mix., 5V, 30mA, Vf<0.23V(1mA), 0.69pF	CP	16dl	-	3a	San
CH	-	2SK2552B-H	n-FET	GP, 20V, 10mA, 100mW, Idss=210..350µA	SOT-23	16fj	-	3a	Nec
CH	-	AP130-22TW	LVR-IC	LDO, 2.2V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CH	-	AP130-22W	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CH	-	APE6810N-A	Vdet-IC	4.63V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ape
CH	-	APE6810U-A	Vdet-IC	4.63V±2%, +Reset PPO	SC-70	16vdc	VD7	3b	Ape
CH	-	AX6902AR	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Axl
CH	-	BSS80B	Si-pnp	Sw, 60V, 800mA, 330mW, B=40..120, >200MHz	SOT-23	16ta	-	3a	Zx
CH	-	FP6809-40CS3P	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Fit
CH	-	GS6332UR21D3	Vdet-IC	2.1V±1.8%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
CH	-	MMBZ4682	Z-diode	2.7V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
CH	-	SiP6332R21D3	Vdet-IC	2.1V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
CH	-	TS3810CXA	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
CH	-	UNR31A3	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=47k/47k	SSSMini3	18ta	-	3a	Pan
CH	-	XC62RP2602M	LVR-IC	LDO, 2.6V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
CH-	-	RT9169-25PVL	LVR-IC	LDO, 2.5V±2%, 100mA	SOT-23	16cg	VR1	3a	Rct
CHO	-	2SC3437-O	Si-npn	Sw, 40V, 200mA, 150mW, 400MHz, B=70..140	SC-59	16ta	-	3a	Tos
CHO	-	2SC4667-O	Si-npn	Sw, 40V, 200mA, 100mW, 400MHz, B=40..80	SOT-323	16ta	-	3a	Tos
CHR	-	2SC3437-R	Si-npn	Sw, 40V, 200mA, 150mW, 400MHz, B=40..180	SC-59	16ta	-	3a	Tos





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CHR	-	2SC4667-R	Si-npn	Sw, 40V, 200mA, 100mW, 400MHz, B=70..140	SOT-323	16ta	-	3a	Tos
CHs	-	BSS80B	Si-pnp	Sw, 60V, 800mA, 330mW, B=40..120, 250MHz	SOT-23	16ta	-	3a	Sie
CHY	-	2SC3437-Y	Si-npn	Sw, 40V, 200mA, 150mW, 400MHz, B=120..240	SC-59	16ta	-	3a	Tos
CHY	-	2SC4667-Y	Si-npn	Sw, 40V, 200mA, 100mW, 400MHz, B=120..240	SOT-323	16ta	-	3a	Tos
CI	-	AP130-23TW	LVR-IC	LDO, 2.3V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CI	-	AP130-23W	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CI	-	APE6810N-B	Vdet-IC	4.38V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ape
CI	-	APE6810U-B	Vdet-IC	4.38V±2%, +Reset PPO	SC-70	16vdc	VD7	3b	Ape
CI	-	AX6902BR	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Axl
CI	-	GS6332UR22D1	Vdet-IC	2.2V±1.8%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
CI	-	SiP6332R22D1	Vdet-IC	2.2V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
CI	-	TS3810CXB	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
CJ	-	2SK2552B-J	n-FET	GP, 20V, 10mA, 100mW, Idss=320..430µA	SOT-23	16fj	-	3a	Nec
CJ	-	AP130-24TW	LVR-IC	LDO, 2.4V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CJ	-	AP130-24W	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CJ	-	APE6810N-C	Vdet-IC	4.00V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ape
CJ	-	APE6810U-C	Vdet-IC	4.00V±2%, +Reset PPO	SC-70	16vdc	VD7	3b	Ape
CJ	-	AX6902CR	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Axl
CJ	-	BSS80C	Si-pnp	Sw, 60V, 800mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Zx
CJ	-	CPH3209	Si-npn	DC/DC-Conv, 40V, 3A, 900mW, 450MHz, B=200..560	CPH3	16ta	-	3a	San
CJ	-	FP6809-44CS3P	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Fit
CJ	-	MMBZ4683	Z-diode	3.0V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
CJ	-	TS3810CXC	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
CJ3	-	2SK1067-3	n-MOSFET	VHF/FM, 16V, 30mA, 150mW, Idss=1.2..3mA, Up<2.5V	MCP	16fa	-	3a	San
CJ3	-	2SK543-3	n-MOSFET	FM-Tun, VHF-amp, 20V, 30mA, 200mW, Idss=1.2..3mA	SOT-23	16fa	-	3a	San
CJ4	-	2SK1067-4	n-MOSFET	VHF/FM, 16V, 30mA, 150mW, Idss=2.5..6mA, Up<2.5V	MCP	16fa	-	3a	San
CJ4	-	2SK543-4	n-MOSFET	FM-Tun, VHF-amp, 20V, 30mA, 200mW, Idss=2.5..6mA	SOT-23	16fa	-	3a	San
CJ5	-	2SK1067-5	n-MOSFET	VHF/FM, 16V, 30mA, 150mW, Idss=5..12mA, Up<2.5V	MCP	16fa	-	3a	San
CJ5	-	2SK543-5	n-MOSFET	FM-Tun, VHF-amp, 20V, 30mA, 200mW, Idss=5..12mA	SOT-23	16fa	-	3a	San
CJs	-	BSS80C	Si-pnp	Sw, 60V, 800mA, 330mW, B=100..300, 250MHz	SOT-23	16ta	-	3a	Sie
cK	-	BU46K412G	Vdet-IC	4.1V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
Ck	-	BD48K59G	Vdet-IC	5.9V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
CK	-	15C02MH	Si-npn	AF, GP, 20V, 1A, 600mW, B=300..600, 440MHz	MCPH3	18ta	-	3a	San
CK	-	AP130-25TW	LVR-IC	LDO, 2.5V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CK	-	AP130-25W	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CK	-	APE6810N-D	Vdet-IC	3.08V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ape
CK	-	APE6810U-D	Vdet-IC	3.08V±2%, +Reset PPO	SC-70	16vdc	VD7	3b	Ape
CK	-	AX6902DR	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Axl
CK	-	BCX71JR	Si-pnp	GP, Sw, 45V, 100mA, 250mW, B=250..460, >100MHz	SOT-23	16te	-	3a	Phi
CK	-	BCX71KR	Si-pnp	AF, 45V, 200mA, 330mW, B=380..630, >180MHz	SOT-23	16ta	-	3a	Zx
CK	-	BCX71RK	Si-pnp	GP, Sw, 45V, 100mA, 250mW, B=380..630, >100MHz	SOT-23	16ta	-	3a	Zx
CK	-	CPH3210	Si-npn	DC/DC-Conv, 40V, 5A, 900mW, 290MHz, B=200..560	CPH3	16ta	-	3a	San
CK	-	FP6809-46CS3P	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Fit
CK	-	GS6332UR22D2	Vdet-IC	2.2V±1.8%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
CK	-	MMBZ4684	Z-diode	3.3V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
CK	-	SiP6332R22D2	Vdet-IC	2.2V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
CK	-	TS3810CXD	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
CK	-	UNR31A4	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=10k47k	SSSMini3	18ta	-	3a	Pan
CK	-	XC62RP2702M	LVR-IC	LDO, 2.7V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
CKB	-	CMPT8099	Si-npn	AF, 80V, 500mA, 350mW, B=100..300, >150MHz	SOT-23	16ta	-	3a	Cen
CL	-	2SA1163-BL	Si-pnp	GP, AF, 120V, 100mA, 150mW, B=350..700, 100MHz	SOT-23	16ta	-	3a	Tos
CL	-	2SA1342	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	CP	16ta	-	3a	San
CL	-	2SA1587-B	Si-pnp	GP, LN, 120V, 120mA, 100mW, B=350..700, >100MHz	SOT-323	16ta	-	3a	Tos
CL	-	2SA1677	Si-pnp-Digi	Sw, 50V, 100mA, 200MHz, R1/R2=22k22k	SOT-323	16ta	-	3a	San
CL	-	2SA1980UF-L	Si-pnp	GP, 50V, 150mA, 200mW, B=300..700, 80MHz	SOT-323F	18ta	-	3a	Auk
CL	-	2SA1980U-L	Si-pnp	GP, 50V, 150mA, 200mW, B=300..700, 80MHz	SOT-323	16ta	-	3a	Auk
CL	-	2SC5343EF-L	Si-npn	GP, 60V, 150mA, 150mW, >80MHz, B=300..700	SOT-523F	18ta	-	3a	Auk
CL	-	2SC5343E-L	Si-npn	GP, 60V, 150mA, 150mW, >80MHz, B=300..700	SOT-523	16ta	-	3a	Auk
CL	-	30C02CH	Si-npn	AF, GP, 40V, 700mA, 700mW, B=300..600, 540MHz	CPH3	16ta	-	3a	San
CL	-	30C02MH	Si-npn	AF, GP, 40V, 700mA, 600mW, B=300..600, 540MHz	MCPH3	18ta	-	3a	San
CL	-	AP130-26TW	LVR-IC	LDO, 2.6V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CL	-	AP130-26W	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CL	-	APE6810N-E	Vdet-IC	2.93V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ape
CL	-	APE6810U-E	Vdet-IC	2.93V±2%, +Reset PPO	SC-70	16vdc	VD7	3b	Ape
CL	-	AX6902ER	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Axl
CL	-	BSS82B	Si-pnp	Sw, 60V, 800mA, 330mW, B=40..120, >200MHz	SOT-23	16ta	-	3a	Zx
CL	-	FP6810-23CS3P	Vdet-IC	2.32V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Fit
CL	-	GS6332UR22D3	Vdet-IC	2.2V±1.8%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
CL	-	KTA2017-BL	Si-pnp	AF, LN, 120V, 100mA, 100mW, B=200.400, 100MHz	USM	16ta	-	3a	Kec
CL	-	SiP6332R22D3	Vdet-IC	2.2V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CL	-	TS3810CXE	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
CL	-	UNR31A5	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1=10k	SSSMini3	18ta	-	3a	Pan
CL	-	XC62RP2802M	LVR-IC	LDO, 2.8V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
CLs	-	BSS82B	Si-pnp	Sw, 60V, 800mA, 330mW, B=40..120, 250MHz	SOT-23	16ta	-	3a	Sie
cM	-	BU46K422G	Vdet-IC	4.2V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
Cm	-	APE6812N-I	Vdet-IC	4.25V±2%, +Reset PPO	SOT-23	16vda	VD7	3b	Ape
Cm	-	APE6812U-I	Vdet-IC	4.25V±2%, +Reset PPO	SC-70	16vda	VD7	3b	Ape
Cm	-	BD48K60G	Vdet-IC	6.0V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
CM	-	50C02MH	Si-npn	AF, GP, 60V, 500mA, 600mW, B=300..800, 500MHz	MCPH3	18ta	-	3a	San
CM	-	AP130-27TW	LVR-IC	LDO, 2.7V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CM	-	AP130-27W	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CM	-	APE6810N-F	Vdet-IC	2.63V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ape
CM	-	APE6810U-F	Vdet-IC	2.63V±2%, +Reset PPO	SC-70	16vdc	VD7	3b	Ape
CM	-	AX6902FR	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Axl
CM	-	BSS82C	Si-pnp	Sw, 60V, 800mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Zx
CM	-	CPH3212	Si-npn	DC/DC-Conv, 60V, 5A, 900mW, 330MHz, B=200..560	CPH3	16ta	-	3a	San
CM	-	FP6810-26CS3P	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Fit
CM	-	GS6332UR23D1	Vdet-IC	2.3V±1.8%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
CM	-	MMBZ4685	Z-diode	3.6V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
CM	-	SiP6332R23D1	Vdet-IC	2.3V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
CM	-	TS3810CXF	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
CM	-	XC62RP2902M	LVR-IC	LDO, 2.9V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
CMs	-	BSS82C	Si-pnp	Sw, 60V, 800mA, 330mW, B=100..300, 250MHz	SOT-23	16ta	-	3a	Sie
cN	-	BU46K432G	Vdet-IC	4.3V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
Cn	-	BD49K23G	Vdet-IC	2.3V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
CN	-	2SC5537	Si-npn	VHF/UHF, 12V, 15mA, 80mW, B=90..200, 5GHz	SSFP	18ta	-	3a	San
CN	-	AP130-28TW	LVR-IC	LDO, 2.8V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CN	-	AP130-28W	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CN	-	APE6810N-G	Vdet-IC	2.25V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ape
CN	-	APE6810U-G	Vdet-IC	2.25V±2%, +Reset PPO	SC-70	16vdc	VD7	3b	Ape
CN	-	AX6902GR	Vdet-IC	2.25V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Axl
CN	-	FP6810-29CS3P	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Fit
CN	-	GS6332UR23D2	Vdet-IC	2.3V±1.8%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
CN	-	MMBZ4686	Z-diode	3.9V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
CN	-	SiP6332R23D2	Vdet-IC	2.3V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
CN	-	TS3810CXG	Vdet-IC	2.25V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
CN	-	UNR31A6	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1=4k7	SSSMini3	18ta	-	3a	Pan
CN3	-	2SC4853-3	Si-npn	VHF/UHF, 12V, 15mA, 80mW, B=60..120, 5GHz	MCP	16ta	-	3a	San
CN3	-	2SC4854-3	Si-npn	VHF/UHF, 12V, 15mA, 80mW, B=60..120, 5GHz	CP	16ta	-	3a	San
CN4	-	2SC4853-4	Si-npn	VHF/UHF, 12V, 15mA, 80mW, B=901..180, 5GHz	MCP	16ta	-	3a	San
CN4	-	2SC4854-4	Si-npn	VHF/UHF, 12V, 15mA, 80mW, B=901..180, 5GHz	CP	16ta	-	3a	San
CN5	-	2SC4853-5	Si-npn	VHF/UHF, 12V, 15mA, 80mW, B=135..270, 5GHz	MCP	16ta	-	3a	San
CN5	-	2SC4854-5	Si-npn	VHF/UHF, 12V, 15mA, 80mW, B=60..120, 5GHz	CP	16ta	-	3a	San
CN9	-	LN61CN1002M	Vdet-IC	1.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNA	-	LN61CN1102M	Vdet-IC	1.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNB	-	LN61CN1202M	Vdet-IC	1.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNC	-	LN61CN1302M	Vdet-IC	1.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CND	-	LN61CN1402M	Vdet-IC	1.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNE	-	LN61CN1502M	Vdet-IC	1.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNF	-	LN61CN1602M	Vdet-IC	1.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNH	-	LN61CN1702M	Vdet-IC	1.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNK	-	LN61CN1802M	Vdet-IC	1.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNL	-	LN61CN1902M	Vdet-IC	1.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNM	-	LN61CN2002M	Vdet-IC	2.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNN	-	LN61CN2102M	Vdet-IC	2.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNP	-	LN61CN2202M	Vdet-IC	2.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNR	-	LN61CN2302M	Vdet-IC	2.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNS	-	LN61CN2402M	Vdet-IC	2.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNT	-	LN61CN2502M	Vdet-IC	2.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNU	-	LN61CN2602M	Vdet-IC	2.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNV	-	LN61CN2702M	Vdet-IC	2.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNX	-	LN61CN2802M	Vdet-IC	2.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNY	-	LN61CN2902M	Vdet-IC	2.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CNZ	-	LN61CN3002M	Vdet-IC	3.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
cO	-	BU46K442G	Vdet-IC	4.4V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
CO	-	2SA1980UF-O	Si-pnp	GP, 50V, 150mA, 200mW, B=70..140, 80MHz	SOT-323F	18ta	-	3a	Auk
CO	-	2SA1980U-O	Si-pnp	GP, 50V, 150mA, 200mW, B=70..140, 80MHz	SOT-323	16ta	-	3a	Auk
CO	-	2SC4209-O	Si-npn	AF, Drv, 80V, 200mA, 200mW, B=70..140, 100MHz	SC-59	16ta	-	3a	Tos
CO	-	2SC5343EF-O	Si-npn	GP, 60V, 150mA, 150mW, >80MHz, B=70..140	SOT-523F	18ta	-	3a	Auk
CO	-	2SC5343E-O	Si-npn	GP, 60V, 150mA, 150mW, >80MHz, B=70..140	SOT-523	16ta	-	3a	Auk

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CO	-	AP130-29TW	LVR-IC	LDO, 2.9V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CO	-	AP130-29W	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CO	-	APE6811N-A	Vdet-IC	4.63V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Ape
CO	-	APE6811U-A	Vdet-IC	4.63V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Ape
CO	-	AX6903AR	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Axl
CO	-	GS6332UR23D3	Vdet-IC	2.3V±1.8%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
CO	-	SiP6332R23D3	Vdet-IC	2.3V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
Cp	-	BD49K24G	Vdet-IC	2.4V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
CP	-	2SC2411K-P	Si-npn	Sw, 40V, 500mA, 200mW, B=82..180, >250MHz	SC-59	16ta	-	3a	Rhm
CP	-	2SC4097-P	Si-npn	Sw, 40V, 500mA, 200mW, B=82..180, 250MHz	SOT-323	16ta	-	3a	Rhm
CP	-	AP130-30TW	LVR-IC	LDO, 3.0V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CP	-	AP130-30W	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CP	-	APE6811N-B	Vdet-IC	4.38V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Ape
CP	-	APE6811U-B	Vdet-IC	4.38V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Ape
CP	-	AX6903BR	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Axl
CP	-	CPH3214	Si-npn	DC/DC-Conv, 15V, 1.5A, 900mW, 450MHz, B=200..560	CPH3	16ta	-	3a	San
CP	-	FP6810-31CS3P	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Fit
CP	-	GS6332UR24D1	Vdet-IC	2.4V±1.8%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
CP	-	L2SC2411KPLT1	Si-npn	GP, 40V, 500mA, 200mW, 250MHz, B=82..180	SOT-23	16ta	-	3a	Lrc
CP	-	MMBZ4687	Z-diode	4.3V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
CP	-	SiP6332R24D1	Vdet-IC	2.4V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
CP	-	UNR31A7	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1=22k	SSSMini3	18ta	-	3a	Pan
CP0	-	LN61CN3102M	Vdet-IC	3.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CP1	-	LN61CN3202M	Vdet-IC	3.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CP2	-	LN61CN3302M	Vdet-IC	3.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CP3	-	LN61CN3402M	Vdet-IC	3.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CP4	-	LN61CN3502M	Vdet-IC	3.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CP5	-	LN61CN3602M	Vdet-IC	3.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CP6	-	LN61CN3702M	Vdet-IC	3.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CP7	-	LN61CN3802M	Vdet-IC	3.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CP8	-	LN61CN3902M	Vdet-IC	3.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CP9	-	LN61CN4002M	Vdet-IC	4.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPA	-	LN61CN4102M	Vdet-IC	4.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPB	-	LN61CN4202M	Vdet-IC	4.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPC	-	LN61CN4302M	Vdet-IC	4.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPD	-	LN61CN4402M	Vdet-IC	4.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPE	-	LN61CN4502M	Vdet-IC	4.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPF	-	LN61CN4602M	Vdet-IC	4.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPH	-	LN61CN4702M	Vdet-IC	4.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPK	-	LN61CN4802M	Vdet-IC	4.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPL	-	LN61CN4902M	Vdet-IC	4.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPM	-	LN61CN5002M	Vdet-IC	5.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPN	-	LN61CN5102M	Vdet-IC	5.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPP	-	LN61CN5202M	Vdet-IC	5.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPR	-	LN61CN5302M	Vdet-IC	5.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPS	-	LN61CN5402M	Vdet-IC	5.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPT	-	LN61CN5502M	Vdet-IC	5.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPU	-	LN61CN5602M	Vdet-IC	5.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPV	-	LN61CN5702M	Vdet-IC	5.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPX	-	LN61CN5802M	Vdet-IC	5.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPY	-	LN61CN5902M	Vdet-IC	5.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
CPZ	-	LN61CN6002M	Vdet-IC	6.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Nln
Cq	-	APE6811U-I	Vdet-IC	4.25V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Ape
CQ	-	2PB1219Q	Si-pnp	GP, 60V, 150mA, 200mW, B=85..170, 100MHz	SOT-323	16ta	-	3a	Phi
CQ	-	2PB710Q	Si-pnp	GP, 60V, 500mA, 250mW, B=85..170, >100MHz	SOT-23	16ta	-	3a	Phi
CQ	-	2SB1219-Q	Si-pnp	GP, 30V, 500mA, 150mW, B=85..170, 20MHz	SOT-323	16ta	-	3a	Pan
CQ	-	2SB1582-Q	Si-pnp	GP, 30V, 500mA, 200MHz, B=85..170	SOT-416	16ta	-	3a	Pan
CQ	-	2SB710-Q	Si-pnp	GP, AF, 50V, 500mA, 200mW, B=85..170, 200MHz	SC-59	16ta	-	3a	Pan
CQ	-	2SC2411K-Q	Si-npn	Sw, 40V, 500mA, 200mW, B=120..270, >250MHz	SC-59	16ta	-	3a	Rhm
CQ	-	2SC4097-Q	Si-npn	Sw, 40V, 500mA, 200mW, B=120..270, >250MHz	SOT-323	16ta	-	3a	Rhm
CQ	-	AP130-31TW	LVR-IC	LDO, 3.1V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CQ	-	AP130-31W	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CQ	-	APE6811N-C	Vdet-IC	4.00V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Ape
CQ	-	APE6811U-C	Vdet-IC	4.00V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Ape
CQ	-	AX6903CR	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Axl
CQ	-	CPH3215	Si-npn	DC/DC-Conv, 40V, 1.5A, 900mW, 500MHz, B=200..560	CPH3	16ta	-	3a	San
CQ	-	L2SC2411KQLT1	Si-npn	GP, 40V, 500mA, 200mW, 250MHz, B=120..270	SOT-23	16ta	-	3a	Lrc
CQ	-	MSB710-Q	Si-pnp	GP, 60V, 500mA, 200mW, B=85..170	SOT-323	16ta	-	3a	Mot
cR	-	BU46K452G	Vdet-IC	4.5V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
cR	-	BU46K472G	Vdet-IC	4.7V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Cr	-	BD49K25G	Vdet-IC	2.5V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
CR	-	2PB1219R	Si-pnp	GP, 60V, 150mA, 200mW, B=120..240, 120MHz	SOT-323	16ta	-	3a	Phi
CR	-	2PB710R	Si-pnp	GP, 60V, 500mA, 250mW, B=120..240, >120MHz	SOT-23	16ta	-	3a	Phi
CR	-	2SA1885-R	Si-pnp	HF, Sw, 15V, 100mA, 150mW, B=56..390, 650MHz	SOT-23	16ta	-	3a	Rhm
CR	-	2SA1886-R	Si-pnp	HF, Sw, 15V, 100mA, 150mW, B=56..390, 650MHz	SOT-323	16ta	-	3a	Rhm
CR	-	2SB1219-R	Si-pnp	GP, 30V, 500mA, 150mW, B=120..240, 20MHz	SOT-323	16ta	-	3a	Pan
CR	-	2SB1582-R	Si-pnp	GP, 30V, 500mA, 200MHz, B=120..240	SOT-416	16ta	-	3a	Pan
CR	-	2SB710-R	Si-pnp	GP, AF, 50V, 500mA, 200mW, B=120..240, 200MHz	SC-59	16ta	-	3a	Pan
CR	-	2SC2411K-R	Si-npn	Sw, 40V, 500mA, 200mW, B=180..390, >250MHz	SC-59	16ta	-	3a	Rhm
CR	-	2SC4097-R	Si-npn	Sw, 40V, 500mA, 200mW, B=180..390, >250MHz	SOT-323	16ta	-	3a	Rhm
CR	-	AP130-32TW	LVR-IC	LDO, 3.2V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CR	-	AP130-32W	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CR	-	APE6811N-D	Vdet-IC	3.08V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Ape
CR	-	APE6811U-D	Vdet-IC	3.08V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Ape
CR	-	AX6903DR	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Axl
CR	-	CPH3216	Si-npn	DC/DC-Conv, 80V, 1A, 900mW, 420MHz, B=200..560	CPH3	16ta	-	3a	San
CR	-	FP6810-40CS3P	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Fit
CR	-	GS6332UR24D2	Vdet-IC	2.4V±1.8%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
CR	-	L2SC2411KRLT1	Si-npn	GP, 40V, 500mA, 200mW, 250MHz, B=180..390	SOT-23	16ta	-	3a	Lrc
CR	-	MSB710-R	Si-pnp	GP, 60V, 500mA, 200mW, B=120..240	SOT-323	16ta	-	3a	Mot
CR	-	SiP6332R24D2	Vdet-IC	2.4V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
CR	-	SRA2219E	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=4.7k/10k	SOT-523	16ta	-	3a	Auk
CR	-	SRA2219EF	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=4.7k/10k	SOT-523F	18ta	-	3a	Auk
CR	-	SRA2219U	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/10k	SOT-323	16ta	-	3a	Auk
CR	-	SRA2219UF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/10k	SOT-323F	18ta	-	3a	Auk
CRH	-	C945LT1-H	Si-npn	AF-Amp, 60V, 150mA, 200mW, B=200..400, >150MHz	SOT-23	16ta	-	3a	Wtr
CRL	-	C945LT1-L	Si-npn	AF-Amp, 60V, 150mA, 200mW, B=130..200, >150MHz	SOT-23	16ta	-	3a	Wtr
CS	-	2PB1219S	Si-pnp	GP, 60V, 150mA, 200mW, B=170..340, 140MHz	SOT-323	16ta	-	3a	Phi
CS	-	2PB710S	Si-pnp	GP, 60V, 500mA, 250mW, B=170..340, >140MHz	SOT-23	16ta	-	3a	Phi
CS	-	2SA1885-S	Si-pnp	HF, Sw, 15V, 100mA, 150mW, B=270..560, 650MHz	SOT-23	16ta	-	3a	Rhm
CS	-	2SA1886-S	Si-pnp	HF, Sw, 15V, 100mA, 150mW, B=270..560, 650MHz	SOT-323	16ta	-	3a	Rhm
CS	-	2SB1219-S	Si-pnp	GP, 30V, 500mA, 150mW, B=170..340, 20MHz	SOT-323	16ta	-	3a	Pan
CS	-	2SB1582-S	Si-pnp	GP, 30V, 500mA, 200MHz, B=170..340	SOT-416	16ta	-	3a	Pan
CS	-	2SB710-S	Si-pnp	GP, AF, 50V, 500mA, 200mW, B=170..340, 200MHz	SC-59	16ta	-	3a	Pan
CS	-	2SC2411K-S	Si-npn	Sw, 40V, 500mA, 200mW, B=270..560, >250MHz	SC-59	16ta	-	3a	Rhm
CS	-	2SC4097-S	Si-npn	Sw, 40V, 500mA, 200mW, B=270..560, >250MHz	SOT-323	16ta	-	3a	Rhm
CS	-	AP130-33TW	LVR-IC	LDO, 3.3V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CS	-	AP130-33W	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CS	-	APE6811N-E	Vdet-IC	2.93V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Ape
CS	-	APE6811U-E	Vdet-IC	2.93V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Ape
CS	-	AX6903ER	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Axl
CS	-	FP6810-44CS3P	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Fit
CS	-	GS6332UR24D3	Vdet-IC	2.4V±1.8%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
CS	-	RT9169-46CV	LVR-IC	LDO, 4.6V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
CS	-	SiP6332R24D3	Vdet-IC	2.4V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
CS4	ck	2SA1682-4	Si-pnp	HV-Driver, 300V, 50mA, 250mW, B=100..200, 70MHz	SOT-23	16ta	-	3a	San
CS5	ck	2SA1682-5	Si-pnp	HV-Driver, 300V, 50mA, 250mW, B=160..320, 70MHz	SOT-23	16ta	-	3a	San
CSA	-	BC847UA	Si-npn	GP, 50V, 100mA, 200mW, B=110..220, >300MHz	SOT-323	16ta	-	3a	Auk
CSA	-	BC847UFA	Si-npn	GP, 50V, 100mA, 200mW, B=110..220, >300MHz	SOT-323F	16ta	-	3a	Auk
CSB	-	BC847UB	Si-npn	GP, 50V, 100mA, 200mW, B=200..450, >300MHz	SOT-323	16ta	-	3a	Auk
CSB	-	BC847UFB	Si-npn	GP, 50V, 100mA, 200mW, B=200..450, >300MHz	SOT-323F	18ta	-	3a	Auk
CSC	-	BC847UC	Si-npn	GP, 50V, 100mA, 200mW, B=420..800, >300MHz	SOT-323	16ta	-	3a	Auk
CSC	-	BC847UFC	Si-npn	GP, 50V, 100mA, 200mW, B=420..800, >300MHz	SOT-323F	18ta	-	3a	Auk
CSH	-	A733LT1-H	Si-pnp	GP, 50V, 150mA, 200mW, >50MHz, B=200..475	SOT-23	16ta	-	3a	Wtr
CSL	-	A733LT1-L	Si-pnp	GP, 50V, 150mA, 200mW, >50MHz, B=120..200	SOT-23	16ta	-	3a	Wtr
CT	-	AP130-34TW	LVR-IC	LDO, 3.4V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CT	-	AP130-34W	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CT	-	APE6811N-F	Vdet-IC	2.63V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Ape
CT	-	APE6811U-F	Vdet-IC	2.63V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Ape
CT	-	AX6903FR	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Axl
CT	-	FP6810-46CS3P	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Fit
CT	-	GS6332UR25D1	Vdet-IC	2.5V±1.8%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
CT	-	MMBZ4688	Z-diode	4.7V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
CT	-	RT9169-44CV	LVR-IC	LDO, 4.4V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
CT	-	SiP6332R25D1	Vdet-IC	2.5V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
CT5	-	2SD1935-5	Si-npn	AF-Drv, 15V, 800mA, 200mW, B=135..270, 200MHz	CP	16ta	-	3a	San
CT6	-	2SD1935-6	Si-npn	AF-Drv, 15V, 800mA, 200mW, B=200..400, 200MHz	CP	16ta	-	3a	San
CT7	-	2SD1935-7	Si-npn	AF-Drv, 15V, 800mA, 200mW, B=300..600, 200MHz	CP	16ta	-	3a	San
CT8	-	2SD1935-8	Si-npn	AF-Drv, 15V, 800mA, 200mW, B=450..900, 200MHz	CP	16ta	-	3a	San
CU	-	AP130-35TW	LVR-IC	LDO, 3.5V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CU	-	AP130-35W	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CU	-	APE6811N-G	Vdet-IC	2.25V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Ape
CU	-	APE6811U-G	Vdet-IC	2.25V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Ape
CU	-	AX6903GR	Vdet-IC	2.25V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3b	Axl
CU	-	MMBZ4689	Z-diode	5.1V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
CU	-	RT9169-45CV	LVR-IC	LDO, 4.5V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
Cv	-	BD48K53G	Vdet-IC	5.3V±1%, -Reset ODO	SSOP-3	16vdc	VD6	3q	Rhm
Cv	-	FP6809-23NS3P	Vdet-IC	2.32V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Fit
CV	-	1SV234	PIN-diode	Dual, VHF/UHF, 50V, 50mA, 0.23pF, Rs=5Ω(10mA, 100MHz)	SOT-23	16dl	-	3a	San
CV	-	1SV246	PIN-diode	Dual, VHF/UHF, 50V, 50mA, 0.23pF, Rs=5Ω(10mA, 100MHz)	MCP	16dl	-	3a	San
CV	-	AP130-36TW	LVR-IC	LDO, 3.6V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CV	-	AP130-36W	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CV	-	GS6332UR25D2	Vdet-IC	2.5V±1.8%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
CV	-	MMBZ4690	Z-diode	5.6V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
CV	-	RT9161-33CV	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
CV	-	SiP6332R25D2	Vdet-IC	2.5V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
CV-	-	RT9161-33PV	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
CVA	-	BC856UA	Si-pnp	GP, 80V, 100mA, 200mW, B=110..220, 150MHz	SOT-323	16ta	-	3a	Auk
CVA	-	BC856UFA	Si-pnp	GP, 80V, 100mA, 200mW, B=110..220, 150MHz	SOT-323F	18ta	-	3a	Auk
CVB	-	BC856UB	Si-pnp	GP, 80V, 100mA, 200mW, B=200..450, 150MHz	SOT-323	16ta	-	3a	Auk
CVB	-	BC856UFB	Si-pnp	GP, 80V, 100mA, 200mW, B=200..450, 150MHz	SOT-323F	18ta	-	3a	Auk
CVC	-	BC856UC	Si-pnp	GP, 80V, 100mA, 200mW, B=420..800, 150MHz	SOT-323	16ta	-	3a	Auk
CVC	-	BC856UFC	Si-pnp	GP, 80V, 100mA, 200mW, B=420..800, 150MHz	SOT-323F	18ta	-	3a	Auk
cW	-	BU46K482G	Vdet-IC	4.8V±1%, -Reset PPO, Td=200ms	SSOP-3	16vdc	VD7	3q	Rhm
Cw	-	FP6809-26NS3P	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Fit
CW	-	AP130-37TW	LVR-IC	LDO, 3.7V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CW	-	AP130-37W	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CW	-	CHT5401WPT	Si-pnp	AF, Drv, 150V, 200mA, B=60..240, 300MHz	SOT-323	16ta	-	3a	Chm
CW	-	GS6332UR25D3	Vdet-IC	2.5V±1.8%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
CW	-	IMP809JEUR	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Imp
CW	-	RT9169-47CV	LVR-IC	LDO, 4.7V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
CW	-	SiP6332R25D3	Vdet-IC	2.5V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
CWAA	-	HWD809JEU	Vdet-IC	4.00V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Csm
CWAA	-	MAX809JUR	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
cX	-	BU45K234G	Vdet-IC	2.3V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Cx	-	FP6809-29NS3P	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Fit
CX	-	50C02CH	Si-npn	AF, GP, 60V, 500mA, 700mW, B=300..800, 500MHz	CPH3	16ta	-	3a	San
CX	-	AP130-38TW	LVR-IC	LDO, 3.8V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CX	-	AP130-38W	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CX	-	MMBZ4692	Z-diode	6.8V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
CX	-	RT9169-48CV	LVR-IC	LDO, 4.8V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
CX=	-	RT9818A-21GU3	Vdet-IC	2.1V±1.5%, -Reset ODO	SOT-323	16vdc	VD6	3a	Rct
CX08	-	LC1462CB3TR08	LVR-IC	LDO, 0.8V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX09	-	LC1462CB3TR09	LVR-IC	LDO, 0.9V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX10	-	LC1462CB3TR10	LVR-IC	LDO, 1.0V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX11	-	LC1462CB3TR11	LVR-IC	LDO, 1.1V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX12	-	LC1462CB3TR12	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX13	-	LC1462CB3TR13	LVR-IC	LDO, 1.3V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX14	-	LC1462CB3TR14	LVR-IC	LDO, 1.4V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX15	-	LC1462CB3TR15	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX16	-	LC1462CB3TR16	LVR-IC	LDO, 1.6V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX17	-	LC1462CB3TR17	LVR-IC	LDO, 1.7V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX18	-	LC1462CB3TR18	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX19	-	LC1462CB3TR19	LVR-IC	LDO, 1.9V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX20	-	LC1462CB3TR20	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX21	-	LC1462CB3TR21	LVR-IC	LDO, 2.1V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX22	-	LC1462CB3TR22	LVR-IC	LDO, 2.2V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX23	-	LC1462CB3TR23	LVR-IC	LDO, 2.3V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX24	-	LC1462CB3TR24	LVR-IC	LDO, 2.4V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX25	-	LC1462CB3TR25	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX26	-	LC1462CB3TR26	LVR-IC	LDO, 2.6V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX27	-	LC1462CB3TR27	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX28	-	LC1462CB3TR28	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX29	-	LC1462CB3TR29	LVR-IC	LDO, 2.9V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX30	-	LC1462CB3TR30	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX31	-	LC1462CB3TR31	LVR-IC	LDO, 3.1V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX32	-	LC1462CB3TR32	LVR-IC	LDO, 3.2V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX33	-	LC1462CB3TR33	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX34	-	LC1462CB3TR34	LVR-IC	LDO, 3.4V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX35	-	LC1462CB3TR35	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CX36	-	LC1462CB3TR36	LVR-IC	LDO, 3.6V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX37	-	LC1462CB3TR37	LVR-IC	LDO, 3.7V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX38	-	LC1462CB3TR38	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX39	-	LC1462CB3TR39	LVR-IC	LDO, 3.9V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX40	-	LC1462CB3TR40	LVR-IC	LDO, 4.0V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX41	-	LC1462CB3TR41	LVR-IC	LDO, 4.1V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX42	-	LC1462CB3TR42	LVR-IC	LDO, 4.2V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX43	-	LC1462CB3TR43	LVR-IC	LDO, 4.3V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX44	-	LC1462CB3TR44	LVR-IC	LDO, 4.4V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX45	-	LC1462CB3TR45	LVR-IC	LDO, 4.5V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX46	-	LC1462CB3TR46	LVR-IC	LDO, 4.6V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX47	-	LC1462CB3TR47	LVR-IC	LDO, 4.7V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX48	-	LC1462CB3TR48	LVR-IC	LDO, 4.8V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX49	-	LC1462CB3TR49	LVR-IC	LDO, 4.9V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CX50	-	LC1462CB3TR50	LVR-IC	LDO, 5.0V±2%, 150mA	SOT-23	16cg	VR1	3a	Lch
CXAA	-	MAX809LUR	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
cY	-	BU45K244G	Vdet-IC	2.4V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Cy	-	BD49K26G	Vdet-IC	2.6V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
CY	-	2SA1980UF-Y	Si-pnp	GP, 50V, 150mA, 200mW, B=120..240, 80MHz	SOT-323F	18ta	-	3a	Auk
CY	-	2SA1980U-Y	Si-pnp	GP, 50V, 150mA, 200mW, B=120..240, 80MHz	SOT-323	16ta	-	3a	Auk
CY	-	2SC3396	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	CP	16ta	-	3a	San
CY	-	2SC4209-Y	Si-npn	AF, Drv, 80V, 200mA, 200mW, B=120..240, 100MHz	SC-59	16ta	-	3a	Tos
CY	-	2SC4397	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=22k/22k	SOT-323	16ta	-	3a	San
CY	-	2SC5343EF-Y	Si-npn	GP, 60V, 150mA, 150mW, >80MHz, B=120..240	SOT-523F	18ta	-	3a	Auk
CY	-	2SC5343E-Y	Si-npn	GP, 60V, 150mA, 150mW, >80MHz, B=120..240	SOT-523	16ta	-	3a	Auk
CY	-	AP130-39TW	LVR-IC	LDO, 3.9V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CY	-	AP130-39W	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CY	-	BFS18R	Si-npn	RF, 30V, 30mA, 200MHz	SOT-23	16ta	-	3a	Sie
CY	-	MMBZ4693	Z-diode	7.5V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
CY	-	RT9169-49CV	LVR-IC	LDO, 4.9V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
CYQ	-	2SC4661-Q	Si-npn	UHF, 15V, 30mA, 150mW, B=50..100, 5GHz	SOT-323	16ta	-	3a	Pan
CYR	-	2SC4661-R	Si-npn	UHF, 15V, 30mA, 150mW, B=80..160, 5GHz	SOT-323	16ta	-	3a	Pan
CYS	-	2SC4661-S	Si-npn	UHF, 15V, 30mA, 150mW, B=125..250, 5GHz	SOT-323	16ta	-	3a	Pan
Cz	-	FP6809-31NS3P	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Fit
CZ	-	AP130-40TW	LVR-IC	LDO, 4.0V±2%, 300mA	TSOT-23-3L	16vj	VR1	3b	Ana
CZ	-	AP130-40W	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23	16vj	VR1	3b	Ana
CZ	-	BFS19R	Si-npn	RF, 30V, 30mA, 250mW, B=65..225, 260MHz	SOT-23	16ta	-	3a	Sie
CZ	-	MMBZ4694	Z-diode	8.2V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
CZ	-	RT9169-50CV	LVR-IC	LDO, 5.0V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
CZ-	-	RT9169-50PV	LVR-IC	LDO, 5.0V±2%, 100mA	SOT-23	16ch	VR1	3a	Rct
d	-	AX6901DA	Vdet-IC	3.08V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Axl
D	-	Si1013R	p-MOSFET	T-FET, Sw, 20V, 275mA, 150mW, <1.2Ω(350mA), 5/35ns	SC-75A	16fh	-	3a	Six
D	cr	ELM7525NEB	Vdet-IC	2.5V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
D	cs	ELM7525CEB	Vdet-IC	2.5V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
D0	-	AP8821C-30GC	Vdet-IC	3.0V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
D0	-	AP8821C-30GT	Vdet-IC	3.0V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
D0	-	AP8821C-30PC	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
D0	-	AP8821C-30PT	Vdet-IC	3.0V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
D0	-	BZX84C56	Z-diode	52..60V, Zzt=200Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
D0	-	ELM89301B	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
D0	-	ELM9730NBB	Vdet-IC	3.0V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
D0	-	HSMP-3800	PIN-diode	RF, 100V, 1A(1ms), <0.37pF, <2Ω(100mA)	SOT-23	16dc	-	3a	Agi
D0	-	ILC5062IC30X	Vdet-IC	3V,±2%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
D0	-	ILC5062M30X	Vdet-IC	3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
D0	-	R3111N302A	Vdet-IC	3V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
D0	-	R3113D401A	Vdet-IC	4V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
D0	-	R3130N40EC	Vdet-IC	4V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
D0	-	RT9809-15CV	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
D0	-	Si2320DS	n-MOSFET	V-MOS, 200V, ±0.22A, <7Ω(0.5A)	SOT-23	16fh	-	3a	Six
D0	-	TC54VC3002ECB	Vdet-IC	3.0V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
D03	-	XC61CC3002M	Vdet-IC	3.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
D03	-	XE61CC3045MR	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
D05	-	LN61FC3012M	Vdet-IC	3.0V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
D05	-	XC61FC3012M	Vdet-IC	3.0V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
D05	-	XC61HC3012MR	Vdet-IC	3.0V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
D06	-	LN61FC3042M	Vdet-IC	3.0V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
D06	-	XC61FC3042M	Vdet-IC	3.0V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
D06	-	XC61HC3042MR	Vdet-IC	3.0V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
D07	-	LN61FC3052M	Vdet-IC	3.0V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
D07	-	XC61FC3052M	Vdet-IC	3.0V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D07	-	XC61HC3052MR	Vdet-IC	3.0V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
D0A	-	ILC5062AIC30X	Vdet-IC	3V±1%, -Reset PPO,	SOT-323	16vdb	VD7	3a	Imp
D0A	-	ILC5062AM30X	Vdet-IC	3V±1%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
D0C	-	KIC3201T-30	LVR-IC	LDO, 3.0V±2%, 400mA	TSM	16cg	VR1	3f	Kec
D1	-	2SC5277-1	Si-npn	UHF-S-band, 20V, 30mA, 100mW, B=60..120, 11GHz	SMCP	16ta	-	3a	San
D1	-	2SK3107	n-MOSFET	V-MOS, LogL, 30V, ±100mA, <15Ω	SOT-23	16fh	-	3a	Nec
D1	-	AP431SA	Vref-IC	Adjustable, Precision, Shunt, 2.495V±1%	SOT-23	16rc	RF1	3b	Di
D1	-	AP8821C-31GC	Vdet-IC	3.1V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
D1	-	AP8821C-31GT	Vdet-IC	3.1V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
D1	-	AP8821C-31PC	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
D1	-	AP8821C-31PT	Vdet-IC	3.1V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
D1	-	AX1110R15	LVR-IC	LDO, 1.5V±2%, 350mA	SOT-23L	16vl	VR1	3b	Axl
D1	-	AZ23C2V7-V	Z-diode	Dual, 2.57..2.84V, Zzt=83Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D1	-	BCW31	Si-pnp	GP, 32V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	Rhm
D1	-	ELM89311B	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
D1	-	ELM9731NBB	Vdet-IC	3.1V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
D1	-	ILC5062IC31X	Vdet-IC	3.1V±2%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
D1	-	ILC5062M31X	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
D1	-	MMBZ5226B	Z-diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 350mW	SOT-23	16dc	-	3c	Pjt
D1	-	MMBZ5226BW	Z-diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 200mW	SOT-323	16dc	-	3c	Pjt
D1	-	R3111N312A	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
D1	-	R3113D411A	Vdet-IC	4.1V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
D1	-	R3130N41EC	Vdet-IC	4.1V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
D1	-	RT9809-16CV	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
D1	-	TC54VC3102ECB	Vdet-IC	3.1V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
D10	-	AZ23C6V2-V	Z-diode	Dual, 5.89..6.51V, Zzt=10Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D10	-	CZMA10	Z-diode	Dual, 10V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D10	-	TZT10AW	Z-diode	Dual, 9.4..10.6V, Izt=5mA, Zzt=20Ω, 300mW	SOT-23	16df	-	3a	Ttr
D11	-	AZ23C6V8	Z-diode	Dual, 6.46..7.14V, Zzt=8Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D11	-	AZ23C6V8-V	Z-diode	Dual, 6.46..7.14V, Zzt=8Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D11	-	CZMA11	Z-diode	Dual, 11V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D11	-	TZT11AW	Z-diode	Dual, 10.4..11.6V, Izt=5mA, Zzt=20Ω, 300mW	SOT-23	16df	-	3a	Ttr
D11	-	TZT6V8AW	Z-diode	Dual, 6.46..7.14V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D11A	-	ML6102C113M	Vdet-IC	1.1V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D12	-	AZ23C7V5	Z-diode	Dual, 7.13..7.88V, Zzt=7Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D12	-	AZ23C7V5-V	Z-diode	Dual, 7.13..7.88V, Zzt=7Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D12	-	CZMA12	Z-diode	Dual, 12V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D12	-	MEZ03-7.5-T2	Z-diode	7.13..7.88V, Izt=5mA, Zzt=7Ω, 300mW	SOT-23	16df	-	3a	Mts
D12	-	TZT12AW	Z-diode	Dual, 11.4..12.7V, Izt=5mA, Zzt=25Ω, 300mW	SOT-23	16df	-	3a	Ttr
D12	-	TZT7V5AW	Z-diode	Dual, 7.13..7.88V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D12A	-	ML6102C123M	Vdet-IC	1.2V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D13	-	AZ23C8V2	Z-diode	Dual, 7.79..8.61V, Zzt=7Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D13	-	AZ23C8V2-V	Z-diode	Dual, 7.79..8.61V, Zzt=7Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D13	-	CZMA13	Z-diode	Dual, 13V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D13	-	MEZ03-8.2-T2	Z-diode	7.79..8.61V, Izt=5mA, Zzt=7Ω, 300mW	SOT-23	16df	-	3a	Mts
D13	-	TZT13AW	Z-diode	Dual, 12.4..14.1V, Izt=5mA, Zzt=30Ω, 300mW	SOT-23	16df	-	3a	Ttr
D13	-	TZT8V2AW	Z-diode	Dual, 7.79..8.61V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D13	-	XC61CC3102M	Vdet-IC	3.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
D13	-	XE61CC3145MR	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
D13A	-	ML6102C133M	Vdet-IC	1.3V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D14	-	AZ23C9V1	Z-diode	Dual, 8.65..9.56V, Zzt=10Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D14	-	AZ23C9V1-V	Z-diode	Dual, 8.65..9.56V, Zzt=10Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D14	-	MEZ03-9.1-T2	Z-diode	8.65..9.56V, Izt=5mA, Zzt=10Ω, 300mW	SOT-23	16df	-	3a	Mts
D14	-	TZT9V1AW	Z-diode	Dual, 8.65..9.56V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D14A	-	ML6102C143M	Vdet-IC	1.4V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D15	-	2SC1622A-15	Si-npn	AF-Amp, 120V, 50mA, 200mW, 110MHz, B=130..270	SOT-23	16ta	-	3a	Nec
D15	-	2SC4180-15	Si-npn	AF, 120V, 50mA, 150mW, B=135..270, >50MHz	SOT-323	16ta	-	3a	Nec
D15	-	AZ23C10	Z-diode	Dual, 9.50..10.50V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D15	-	AZ23C10-V	Z-diode	Dual, 9.50..10.50V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D15	-	CZMA15	Z-diode	Dual, 15V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D15	-	LN61FC3112M	Vdet-IC	3.1V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
D15	-	MEZ03-10-T2	Z-diode	9.50..10.50V, Izt=5mA, Zzt=15Ω, 300mW	SOT-23	16df	-	3a	Mts
D15	-	TZT10AW	Z-diode	Dual, 9.50..10.50V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D15	-	TZT15AW	Z-diode	Dual, 13.8..15.6V, Izt=5mA, Zzt=30Ω, 300mW	SOT-23	16df	-	3a	Ttr
D15	-	XC61FC3112M	Vdet-IC	3.1V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
D15	-	XC61HC3112MR	Vdet-IC	3.1V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
D15A	-	ML6102C153M	Vdet-IC	1.5V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D16	-	2SC1622A-16	Si-npn	AF-Amp, 120V, 50mA, 200mW, 110MHz, B=200..400	SOT-23	16ta	-	3a	Nec
D16	-	2SC4180-16	Si-npn	AF, 120V, 50mA, 150mW, B=200..400, >50MHz	SOT-323	16ta	-	3a	Nec
D16	-	AZ23C11	Z-diode	Dual, 10.45..11.55V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D16	-	AZ23C11-V	Z-diode	Dual, 10.45..11.55V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D16	-	CZMA16	Z-diode	Dual, 16V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D16	-	LN61FC3142M	Vdet-IC	3.1V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
D16	-	MEZ03-11-T2	Z-diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 300mW	SOT-23	16df	-	3a	Mts
D16	-	TZT11AW	Z-diode	Dual, 10.45..11.55V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D16	-	TZT16AW	Z-diode	Dual, 15.3..17.1V, Izt=5mA, Zzt=40Ω, 300mW	SOT-23	16df	-	3a	Ttr
D16	-	XC61FC3142M	Vdet-IC	3.1V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
D16	-	XC61HC3142MR	Vdet-IC	3.1V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
D16A	-	ML6102C163M	Vdet-IC	1.6V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D17	-	2SC1622A-17	Si-npn	AF-Amp, 120V, 50mA, 200mW, 110MHz, B=300..600	SOT-23	16ta	-	3a	Nec
D17	-	2SC4180-17	Si-npn	AF, 120V, 50mA, 150mW, B=300..600, >50MHz	SOT-323	16ta	-	3a	Nec
D17	-	AZ23C12	Z-diode	Dual, 11.40..12.60V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D17	-	AZ23C12-V	Z-diode	Dual, 11.40..12.60V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D17	-	LN61FC3152M	Vdet-IC	3.1V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
D17	-	MEZ03-12-T2	Z-diode	11.40..12.60V, Izt=5mA, Zzt=20Ω, 300mW	SOT-23	16df	-	3a	Mts
D17	-	TZT12AW	Z-diode	Dual, 11.40..12.60V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D17	-	XC61FC3152M	Vdet-IC	3.1V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
D17	-	XC61HC3152MR	Vdet-IC	3.1V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
D17A	-	ML6102C173M	Vdet-IC	1.7V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D18	-	2SC1622A-18	Si-npn	AF-Amp, 120V, 50mA, 200mW, 110MHz, B=450..900	SOT-23	16ta	-	3a	Nec
D18	-	2SC4180-18	Si-npn	AF, 120V, 50mA, 150mW, B=450..900, >50MHz	SOT-323	16ta	-	3a	Nec
D18	-	AZ23C13	Z-diode	Dual, 12.35..13.65V, Zzt=25Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D18	-	AZ23C13-V	Z-diode	Dual, 12.35..13.65V, Zzt=25Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D18	-	CZMA18	Z-diode	Dual, 18V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D18	-	MEZ03-13-T2	Z-diode	12.35..13.65V, Izt=5mA, Zzt=25Ω, 300mW	SOT-23	16df	-	3a	Mts
D18	-	TZT13AW	Z-diode	Dual, 12.35..13.65V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D18	-	TZT18AW	Z-diode	Dual, 16.8..19.1V, Izt=5mA, Zzt=45Ω, 300mW	SOT-23	16df	-	3a	Ttr
D18A	-	ML6102C183M	Vdet-IC	1.8V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D19	-	AZ23C15	Z-diode	Dual, 14.25..15.75V, Zzt=30Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D19	-	AZ23C15-V	Z-diode	Dual, 14.25..15.75V, Zzt=30Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D19	-	MEZ03-15-T2	Z-diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 300mW	SOT-23	16df	-	3a	Mts
D19	-	TZT15AW	Z-diode	Dual, 14.25..15.75V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D19A	-	ML6102C193M	Vdet-IC	1.9V±3%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D1A	-	ILC5062AIC31X	Vdet-IC	3.1V±1%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
D1A	-	ILC5062AM31X	Vdet-IC	3.1V±1%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
D1C	-	KIC3201T-31	LVR-IC	LDO, 3.1V±2%, 400mA	TSM	16cg	VR1	3f	Kec
D1G	-	KSA812-G	Si-pnp	AF, 60V, 100mA, 150mW, B=200..400, >180MHz	SOT-23	16ta	-	3a	Sam
D1L	-	KSA812-L	Si-pnp	AF, 60V, 100mA, 150mW, B=300..600, >180MHz	SOT-23	16ta	-	3a	Sam
D1O	-	KSA812-O	Si-pnp	AF, 60V, 100mA, 150mW, B=90..180, >180MHz	SOT-23	16ta	-	3a	Sam
D1p	-	BCW31	Si-pnp	GP, 32V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	PhH
D1t	-	BCW31	Si-pnp	GP, 32V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	PhM
D1W	-	BCW31	Si-pnp	GP, 32V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	PhC
D1Y	-	KSA812-Y	Si-pnp	AF, 60V, 100mA, 150mW, B=135..270, >180MHz	SOT-23	16ta	-	3a	Sam
D2	-	2SC5277-2	Si-npn	UHF-S-band, 20V, 30mA, 100mW, B=90..180, 11GHz	SMCP	16ta	-	3a	San
D2	-	AP431ASA	Vref-IC	Adjustable, Precision, Shunt, 2.495V±1%	SOT-23	16rc	RF1	3b	Di
D2	-	AP8821C-32GC	Vdet-IC	3.2V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
D2	-	AP8821C-32GT	Vdet-IC	3.2V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
D2	-	AP8821C-32PC	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
D2	-	AP8821C-32PT	Vdet-IC	3.2V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
D2	-	AX1110R18	LVR-IC	LDO, 1.8V±2%, 350mA	SOT-23L	16vl	VR1	3b	Axl
D2	-	AZ23C3V0-V	Z-diode	Dual, 2.85..3.15V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D2	-	BCW32	Si-pnp	GP, 32V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	Rhm
D2	-	ELM89321B	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
D2	-	ELM9732NBB	Vdet-IC	3.2V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
D2	-	HSMP-3802	PIN-diode	Dual, RF, 100V, 1A(1ms), <0.37pF, <2Ω(100mA)	SOT-23	16dl	-	3a	Agi
D2	-	MMBZ5227B	Z-diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 350mW	SOT-23	16dc	-	3c	Pjt
D2	-	MMBZ5227BW	Z-diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 200mW	SOT-323	16dc	-	3c	Pjt
D2	-	R3111N322A	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
D2	-	R3113D421A	Vdet-IC	4.2V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
D2	-	R3130N42EC	Vdet-IC	4.2V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
D2	-	RT9809-17CV	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
D2	-	TC54VC3202ECB	Vdet-IC	3.2V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
D20	-	AZ23C16	Z-diode	Dual, 15.20..16.80V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D20	-	AZ23C16-V	Z-diode	Dual, 15.20..16.80V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D20	-	CZMA20	Z-diode	Dual, 20V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D20	-	MEZ03-16-T2	Z-diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 300mW	SOT-23	16df	-	3a	Mts
D20	-	TZT16AW	Z-diode	Dual, 15.20..16.80V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D20	-	TZT20AW	Z-diode	Dual, 18.8..21.2V, Izt=5mA, Zzt=55Ω, 300mW	SOT-23	16df	-	3a	Ttr
D20A	-	ML6102C202M	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D21	-	2SK2219-21	n-FET	Mic-preamp, 20V, 1mA, 100mW, Idss=140..240µA	MCP	16fa	-	3a	San



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D21	-	2SK931-21	n-FET	GP, 30V, 50mA, 200mW, Idss=5..8.5mA, Up<2V	SOT-23	16fa	-	3a	San
D21	-	AZ23C18	Z-diode	Dual, 17.10..18.90V, Zzt=50Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D21	-	AZ23C18-V	Z-diode	Dual, 17.10..18.90V, Zzt=50Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D21	-	GS809C21EUD	Vdet-IC	2.1V±1.5%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
D21	-	MEZ03-18-T2	Z-diode	17.10..18.90V, Izt=5mA, Zzt=50Ω, 300mW	SOT-23	16df	-	3a	Mts
D21	-	TZT18AW	Z-diode	Dual, 17.10..18.90V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D21A	-	ML6102C212M	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D22	-	2SK2219-22	n-FET	Mic-preamp, 20V, 1mA, 100mW, Idss=210..350µA	MCP	16fa	-	3a	San
D22	-	2SK931-22	n-FET	GP, 30V, 50mA, 200mW, Idss=7.3.12mA, Up<2V	SOT-23	16fa	-	3a	San
D22	-	AZ23C20	Z-diode	Dual, 19.0..21.00V, Zzt=50Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D22	-	AZ23C20-V	Z-diode	Dual, 19.0..21.00V, Zzt=50Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D22	-	CZMA22	Z-diode	Dual, 22V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D22	-	MEZ03-20-T2	Z-diode	19.0..21.0V, Izt=5mA, Zzt=50Ω, 300mW	SOT-23	16df	-	3a	Mts
D22	-	TZT20AW	Z-diode	Dual, 19.00..21.0V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D22	-	TZT22AW	Z-diode	Dual, 20.8..23.3V, Izt=5mA, Zzt=55Ω, 300mW	SOT-23	16df	-	3a	Ttr
D22A	-	ML6102C222M	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D23	-	2SK2219-23	n-FET	Mic-preamp, 20V, 1mA, 100mW, Idss=320..500µA	MCP	16fa	-	3a	San
D23	-	2SK931-23	n-FET	GP, 30V, 50mA, 200mW, Idss=10..17mA, Up<2V	SOT-23	16fa	-	3a	San
D23	-	AZ23C22	Z-diode	Dual, 20.90..23.10V, Zzt=55Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D23	-	AZ23C22-V	Z-diode	Dual, 20.90..23.10V, Zzt=55Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D23	-	MEZ03-22-T2	Z-diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 300mW	SOT-23	16df	-	3a	Mts
D23	-	TZT22AW	Z-diode	Dual, 20.90..23.10V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D23	-	XC61CC3202M	Vdet-IC	3.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
D23	-	XE61CC3245MR	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
D23A	-	ML6102C232M	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D24	-	2SK931-24	n-FET	GP, 30V, 50mA, 200mW, Idss=14.5..24mA, Up<2V	SOT-23	16fa	-	3a	San
D24	-	AZ23C24	Z-diode	Dual, 22.80..25.20V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D24	-	AZ23C24-V	Z-diode	Dual, 22.80..25.20V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D24	-	CZMA24	Z-diode	Dual, 24V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D24	-	GS809C24EUD	Vdet-IC	2.4V±1.5%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
D24	-	MEZ03-24-T2	Z-diode	22.80..25.20V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16df	-	3a	Mts
D24	-	TZT24AW	Z-diode	Dual, 22.80..25.20V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D24	-	TZT24AW	Z-diode	Dual, 22.8..25.6V, Izt=5mA, Zzt=70Ω, 300mW	SOT-23	16df	-	3a	Ttr
D24A	-	ML6102C242M	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D25	-	2SC3115-25	Si-npn	GP, 120V, 50mA, 200mA, B=135..270, 110MHz	SOT-23	16ta	-	3a	Nec
D25	-	2SK931-25	n-FET	GP, 30V, 50mA, 200mW, Idss=16..30mA, Up<2V	SOT-23	16fa	-	3a	San
D25	-	AZ23C27	Z-diode	Dual, 25.65..28.35V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D25	-	AZ23C27-V	Z-diode	Dual, 25.65..28.35V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D25	-	LN61FC3212M	Vdet-IC	3.2V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
D25	-	MEZ03-27-T2	Z-diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16df	-	3a	Mts
D25	-	TZT27AW	Z-diode	Dual, 25.65..28.35V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D25	-	XC61FC3212M	Vdet-IC	3.2V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
D25	-	XC61HC3212MR	Vdet-IC	3.2V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
D25A	-	ML6102C252M	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D26	-	2SC3115-26	Si-npn	GP, 120V, 50mA, 200mA, B=200..400, 110MHz	SOT-23	16ta	-	3a	Nec
D26	-	AZ23C30	Z-diode	Dual, 28.50..31.50V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D26	-	AZ23C30-V	Z-diode	Dual, 28.50..31.50V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D26	-	GS809CREUD	Vdet-IC	2.63V±1.5%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
D26	-	LN61FC3242M	Vdet-IC	3.2V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
D26	-	MEZ03-30-T2	Z-diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16df	-	3a	Mts
D26	-	TZT30AW	Z-diode	Dual, 28.50..31.50V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D26	-	XC61FC3242M	Vdet-IC	3.2V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
D26	-	XC61HC3242MR	Vdet-IC	3.2V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
D26A	-	ML6102C262M	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D27	-	2SC3115-27	Si-npn	GP, 120V, 50mA, 200mA, B=300..600, 110MHz	SOT-23	16ta	-	3a	Nec
D27	-	AZ23C33	Z-diode	Dual, 31.35..34.65V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D27	-	AZ23C33-V	Z-diode	Dual, 31.35..34.65V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D27	-	CZMA27	Z-diode	Dual, 27V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D27	-	GS809C27SEUD	Vdet-IC	2.7V±1.5%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
D27	-	LN61FC3252M	Vdet-IC	3.2V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
D27	-	MEZ03-33-T2	Z-diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16df	-	3a	Mts
D27	-	TZT27AW	Z-diode	Dual, 25.1..28.9V, Izt=2mA, Zzt=80Ω, 300mW	SOT-23	16df	-	3a	Ttr
D27	-	TZT33AW	Z-diode	Dual, 31.35..34.65V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D27	-	XC61FC3252M	Vdet-IC	3.2V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
D27	-	XC61HC3252MR	Vdet-IC	3.2V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
D27A	-	ML6102C272M	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D28	-	2SC3115-28	Si-npn	GP, 120V, 50mA, 200mA, B=450..900, 110MHz	SOT-23	16ta	-	3a	Nec
D28	-	AZ23C36	Z-diode	Dual, 34.20..37.80V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D28	-	AZ23C36-V	Z-diode	Dual, 34.20..37.80V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D28	-	BAS70W	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dc	-	3a	Ste

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D28	-	TZT36AW	Z-diode	Dual, 34.20..37.80V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D28A	-	ML6102C282M	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D29	-	AZ23C39	Z-diode	Dual, 37.05..40.95V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
D29	-	AZ23C39-V	Z-diode	Dual, 37.05..40.95V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D29	-	BAS70-06W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16df	-	3a	Ste
D29	-	GS809CSEUD	Vdet-IC	2.93V±1.5%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
D29	-	MEZ03-39-T2	Z-diode	37.05..40-95V, Izt=5mA, Zzt=90Ω, 300mW	SOT-23	16df	-	3a	Mts
D29	-	TZT39AW	Z-diode	Dual, 37.05..40.95V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D29A	-	ML6102C292M	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D2C	-	KIC3201T-32	LVR-IC	LDO, 3.2V±2%, 400mA	TSM	16cg	VR1	3f	Kec
D2D	-	RB491D	Si-diode	SBR, 40V, 100mA, Vf<0.53V(1A)	SOT-23	16dc	-	3a	Trs
D2E	-	RB491D	Si-diode	SBR, 25V, 1A, Vf<0.45V(1A)	SOT-23	16dc	-	3i	Rhm
D2p	-	BCW32	Si-pnp	GP, 32V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	Phi
D2S	-	MEZ03-36-T2	Z-diode	34.20..37.80V, Izt=5mA, Zzt=90Ω, 300mW	SOT-23	16df	-	3a	Mts
D2t	-	BCW32	Si-pnp	GP, 32V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	Phi
D3	-	1SS187	Si-diode	Sw, U-Fast, 85V, 100mA, 150mW, Vf<1.2V(100mA), <4ns	SC-59	16eb	-	3a	Tos
D3	-	2SC5277-3	Si-npn	UHF-S-band, 20V, 30mA, 100mW, B=135..270, 11GHz	SMCP	16ta	-	3a	San
D3	-	AP8821C-33GC	Vdet-IC	3.3V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
D3	-	AP8821C-33GT	Vdet-IC	3.3V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
D3	-	AP8821C-33PC	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
D3	-	AP8821C-33PT	Vdet-IC	3.3V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
D3	-	AX1110R25	LVR-IC	LDO, 2.5V±2%, 350mA	SOT-23L	16vl	VR1	3b	Axl
D3	-	AZ23C3V3-V	Z-diode	Dual, 3.14..3.47V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D3	-	BCW33	Si-pnp	GP, 32V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	Rhm
D3	-	ELM89331B	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
D3	-	ELM9733NBB	Vdet-IC	3.3V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
D3	-	KV1735R	C-diode	2x FM-tun, 16V, 50mA, 22.25/77.74pF(8..2V), <0.3Ω (100MHz)	SOT-23C-3	16dg	-	3a	Tok
D3	-	MMBZ5228B	Z-diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 350mW	SOT-23	16dc	-	3c	Pjt
D3	-	MMBZ5228BW	Z-diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 200mW	SOT-323	16dc	-	3c	Pjt
D3	-	R3111N332A	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
D3	-	R3113D431A	Vdet-IC	4.3V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
D3	-	R3130N43EC	Vdet-IC	4.3V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
D3	-	RT9809-18CV	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
D3	-	TC54VC3302ECB	Vdet-IC	3.3V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
D3.9	-	TZT3V9AW	Z-diode	Dual, 3.7..4.1V, Izt=5mA, Zzt=90Ω, 300mW	SOT-23	16df	-	3a	Ttr
D30	-	AZ23C43	Z-diode	Dual, 40.85..45.15V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
D30	-	AZ23C43-V	Z-diode	Dual, 40.85..45.15V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D30	-	BAS70-05W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dg	-	3a	Ste
D30	-	CZMA30	Z-diode	Dual, 30V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D30	-	GS809CTEUD	Vdet-IC	3.08V±1.5%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
D30	-	MEZ03-43-T2	Z-diode	40.85..45-15V, Izt=5mA, Zzt=100Ω, 300mW	SOT-23	16df	-	3a	Mts
D30	-	TZT30AW	Z-diode	Dual, 28.0..32.0V, Izt=2mA, Zzt=80Ω, 300mW	SOT-23	16df	-	3a	Ttr
D30	-	TZT43AW	Z-diode	Dual, 40.85..45.15V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D30A	-	ML6102C302M	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D31	-	AZ23C47	Z-diode	Dual, 44.65..49.35V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
D31	-	AZ23C47-V	Z-diode	Dual, 44.65..49.35V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D31	-	BAS70-04W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dl	-	3a	Ste
D31	-	MEZ03-47-T2	Z-diode	44.65..49.35V, Izt=5mA, Zzt=100Ω, 300mW	SOT-23	16df	-	3a	Mts
D31	-	TZT47AW	Z-diode	Dual, 44.65..49.35V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D31A	-	ML6102C312M	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D32	-	AZ23C51	Z-diode	Dual, 48.45 53.55V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
D32	-	AZ23C51-V	Z-diode	Dual, 48.45 53.55V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D32	-	MEZ03-51-T2	Z-diode	48.45..53-55V, Izt=5mA, Zzt=100Ω, 300mW	SOT-23	16df	-	3a	Mts
D32	-	TZT51AW	Z-diode	Dual, 48.45..53.55V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
D32A	-	ML6102C322M	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D33	-	CZMA33	Z-diode	Dual, 33V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D33	-	TZT33AW	Z-diode	Dual, 31.0..35.0V, Izt=2mA, Zzt=80Ω, 300mW	SOT-23	16df	-	3a	Ttr
D33	-	XC61CC3302M	Vdet-IC	3.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
D33	-	XE61CC3345MR	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
D33A	-	ML6102C332M	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D34A	-	ML6102C342M	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D35	-	LN61FC3312M	Vdet-IC	3.3V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
D35	-	XC61FC3312M	Vdet-IC	3.3V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
D35	-	XC61HC3312MR	Vdet-IC	3.3V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
D35A	-	ML6102C352M	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D36	-	CZMA36	Z-diode	Dual, 36V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D36	-	LN61FC3342M	Vdet-IC	3.3V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
D36	-	TZT36AW	Z-diode	Dual, 34.0..38.0V, Izt=2mA, Zzt=90Ω, 300mW	SOT-23	16df	-	3a	Ttr
D36	-	XC61FC3342M	Vdet-IC	3.3V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
D36	-	XC61HC3342MR	Vdet-IC	3.3V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D36A	-	ML6102C362M	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D37	-	LN61FC3352M	Vdet-IC	3.3V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
D37	-	XC61FC3352M	Vdet-IC	3.3V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
D37	-	XC61HC3352MR	Vdet-IC	3.3V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
D37A	-	ML6102C372M	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D38A	-	ML6102C382M	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D39	-	CZMA39	Z-diode	Dual, 39V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D39	-	TZT39AW	Z-diode	Dual, 37.0..41.0V, Izt=2mA, Zzt=130Ω, 300mW	SOT-23	16df	-	3a	Ttr
D39A	-	ML6102C392M	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D3A	-	RB400D	Si-diode	SBR, 40V, 500mA, Vf<0.55V(500mA), <20pF	SOT-23	16dc	-	3a	Rhm
D3B	-	RB420D	Si-diode	SBR, 40V, 100mA, Vf<0.45V(10mA), <6pF	SOT-23	16dc	-	3a	Rhm
D3C	-	KIC3201T-33	LVR-IC	LDO, 3.3V±2%, 400mA	TSM	16cg	VR1	3f	Kec
D3C	-	RB421D	Si-diode	SBR, 40V, 100mA, Vf<0.55V(100mA), <6pF	SOT-23	16dc	-	3a	Rhm
D3L	-	RB425D	Si-diode	Dual, Schottky Rectifier, 40V, 100mA, Vf<0.55V(100mA), <6pF	SOT-23	16dg	-	3a	Rhm
D3p	-	BCW33	Si-pnp	GP, 32V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	Phi
D3Q	-	RB495D	Si-diode	Dual, Schottky Rectifier, 40V, 400mA, Vf<0.5V(200mA)	SOT-23	16dg	-	3a	Rhm
D3t	-	BCW33	Si-pnp	GP, 32V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3a	Phi
D4	-	2SA1252-4	Si-pnp	AF, 60V, 150mA, 200mW, 100MHz, B=90..180	SOT-23	16ta	-	3a	San
D4	-	AP8821C-34GC	Vdet-IC	3.4V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
D4	-	AP8821C-34GT	Vdet-IC	3.4V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
D4	-	AP8821C-34PC	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
D4	-	AP8821C-34PT	Vdet-IC	3.4V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
D4	-	AX1110R33	LVR-IC	LDO, 3.3V±2%, 350mA	SOT-23L	16vl	VR1	3b	Axl
D4	-	AZ23C3V6-V	Z-diode	Dual, 3.42..3.78V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D4	-	BB404D	C-diode	Dual, 10V, 46.5..22pF(2..8V), 100MHz	SOT-23	16dg	-	3a	Itt
D4	-	BCW31R	Si-pnp	GP, 32V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16te	-	3a	Phi
D4	-	ELM89341B	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
D4	-	ELM9734NBB	Vdet-IC	3.4V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
D4	-	HSMP-3804	PIN-diode	Dual, RF, 100V, 1A(1ms), <0.37pF, <2Ω(100mA)	SOT-23	16dg	-	3a	Agi
D4	-	KA4L3M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/4k7	SOT-416	16ta	-	3a	Nec
D4	-	MMBD4148SE	Si-diode	Dual, Sw, Fast, 75V, 200mA, 350mW, <4ns, 4pF	SOT-23	16dl	-	3a	F
D4	-	MMBZ5229B	Z-diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 350mW	SOT-23	16dc	-	3c	Pjt
D4	-	MMBZ5229BW	Z-diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOT-323	16dc	-	3c	Pjt
D4	-	R3111N342A	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
D4	-	R3113D441A	Vdet-IC	4.4V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
D4	-	R3130N44EC	Vdet-IC	4.4V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
D4	-	RT9809-19CV	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
D4	-	TC54VC3402ECB	Vdet-IC	3.4V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
D4.3	-	CZMA4V3	Z-diode	Dual, 4.3V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D4.3	-	TZT4V3AW	Z-diode	Dual, 4.0..4.6V, Izt=5mA, Zzt=90Ω, 300mW	SOT-23	16df	-	3a	Ttr
D4.7	-	CZMA4V7	Z-diode	Dual, 4.7V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D4.7	-	TZT4V7AW	Z-diode	Dual, 4.4..5.0V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16df	-	3a	Ttr
D40	-	GS809CJEUD	Vdet-IC	4.0V±1.5%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
D40A	-	ML6102C402M	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D41	-	AZ23C2V7-V-G	Z-diode	Dual, 2.57..2.84V, Zzt=83Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D41A	-	ML6102C412M	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D42	-	2SD2228-42	Si-npn	AF, 25V, 500mA, 150mW, >60MHz, B=110..240	SOT-323	16ta	-	3a	Nec
D42	-	AZ23C3V0-V-G	Z-diode	Dual, 2.85..3.15V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D42A	-	ML6102C422M	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D43	-	2SD2228-43	Si-npn	AF, 25V, 500mA, 150mW, >60MHz, B=190..320	SOT-323	16ta	-	3a	Nec
D43	-	AZ23C3V3-V-G	Z-diode	Dual, 3.14..3.47V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D43	-	GS809CMEUD	Vdet-IC	4.38V±1.5%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
D43	-	TZT43AW	Z-diode	Dual, 40.0..46.0V, Izt=2mA, Zzt=150Ω, 300mW	SOT-23	16df	-	3a	Ttr
D43	-	XC61CC3402M	Vdet-IC	3.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
D43	-	XE61CC3445MR	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
D43A	-	ML6102C432M	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D44	-	2SD2228-44	Si-npn	AF, 25V, 500mA, 150mW, >60MHz, B=270..400	SOT-323	16ta	-	3a	Nec
D44	-	AZ23C3V6-V-G	Z-diode	Dual, 3.42..3.78V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D44A	-	ML6102C442M	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D45	-	2SD2228-45	Si-npn	AF, 25V, 500mA, 150mW, >60MHz, B=350..600	SOT-323	16ta	-	3a	Nec
D45	-	AZ23C3V9-V-G	Z-diode	Dual, 3.71..4.10V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D45	-	LN61FC3412M	Vdet-IC	3.4V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
D45	-	XC61FC3412M	Vdet-IC	3.4V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
D45	-	XC61HC3412MR	Vdet-IC	3.4V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
D45A	-	ML6102C452M	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D46	-	AZ23C4V3-V-G	Z-diode	Dual, 4.09..4.52V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D46	-	BAT46W	Si-diode	SBD, 100V, 150mA, Vf<1V(250mA), 6pF	SOT-323	16dc	-	3b	Ste
D46	-	GS809CLEUD	Vdet-IC	4.63V±1.5%, -Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
D46	-	LN61FC3442M	Vdet-IC	3.4V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
D46	-	XC61FC3442M	Vdet-IC	3.4V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D46	-	XC61HC3442MR	Vdet-IC	3.4V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
D46A	-	ML6102C462M	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D47	-	AZ23C4V7-V-G	Z-diode	Dual, 4.47..4.94V, Zzt=78Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D47	-	LN61FC3452M	Vdet-IC	3.4V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
D47	-	TZT47AW	Z-diode	Dual, 44.0..50.0V, Izt=2mA, Zzt=170Ω, 300mW	SOT-23	16df	-	3a	Ttr
D47	-	XC61FC3452M	Vdet-IC	3.4V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
D47	-	XC61HC3452MR	Vdet-IC	3.4V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
D47A	-	ML6102C472M	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D48	-	AZ23C5V1-V-G	Z-diode	Dual, 4.85..5.36V, Zzt=60Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D48A	-	ML6102C482M	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D49	-	AZ23C5V6-V-G	Z-diode	Dual, 5.32..5.88V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D49A	-	ML6102C492M	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D4C	-	KIC3201T-34	LVR-IC	LDO, 3.4V±2%, 400mA	TSM	16cg	VR1	3f	Kec
D5	-	2SA1252-5	Si-pnp	AF, 60V, 150mA, 200mW, 100MHz, B=135..270	SOT-23	16ta	-	3a	San
D5	-	2SA1687-5	Si-pnp	GP, AF, 60V, 150mA, 150mW, B=135..270, 130MHz	MCP	16ta	-	3a	San
D5	-	AP431SR	Vref-IC	Adjustable, Precision, Shunt, 2.495V±0.5%	SOT-23	16rd	RF1	3b	Di
D5	-	AP8821C-35GC	Vdet-IC	3.5V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
D5	-	AP8821C-35GT	Vdet-IC	3.5V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
D5	-	AP8821C-35PC	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
D5	-	AP8821C-35PT	Vdet-IC	3.5V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
D5	-	AX1110R50	LVR-IC	LDO, 5.0V±2%, 350mA	SOT-23L	16vl	VR1	3b	Axl
D5	-	AZ23C3V9-V	Z-diode	Dual, 3.71..4.10V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D5	-	BCW32R	Si-pnp	GP, 32V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16te	-	3a	Phi
D5	-	ELM89351B	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
D5	-	ELM9735NBB	Vdet-IC	3.5V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
D5	-	MMBD4148CC	Si-diode	Dual, Sw, Fast, 75V, 200mA, 350mW, <4ns, 4pF	SOT-23	16dg	-	3a	F
D5	-	MMBZ5230B	Z-diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 350mW	SOT-23	16dc	-	3c	Pjt
D5	-	MMBZ5230BW	Z-diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 200mW	SOT-323	16dc	-	3c	Pjt
D5	-	R3111N352A	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
D5	-	R3113D451A	Vdet-IC	4.5V±2%, -Reset, ODO	SON1408-3	18vda	VD6	3d	Ric
D5	-	R3130N45EC	Vdet-IC	4.5V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
D5	-	RT9809-20CV	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
D5	-	SP810EK-2-3	Vdet-IC	2.3V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Sip
D5	-	TC54VC3502ECB	Vdet-IC	3.5V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
D5.1	-	CZMA5V1	Z-diode	Dual, 5.1V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D5.1	-	TZT5V1AW	Z-diode	Dual, 4.8..5.4V, Izt=5mA, Zzt=60Ω, 300mW	SOT-23	16df	-	3a	Ttr
D5.6	-	CZMA5V6	Z-diode	Dual, 5.6V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D5.6	-	TZT5V6AW	Z-diode	Dual, 5.2..6.0V, Izt=5mA, Zzt=40Ω, 300mW	SOT-23	16df	-	3a	Ttr
D50	-	AZ23C6V2-V-G	Z-diode	Dual, 5.89..6.51V, Zzt=10Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D50A	-	ML6102C502M	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D51	-	2SD780A-51	Si-npn	AF, 80V, 300mA, 200mW, B=110..180, 100MHz	SOT-23	16ta	-	3a	Nec
D51	-	AZ23C6V8-V-G	Z-diode	Dual, 6.46..7.14V, Zzt=8Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D51A	-	ML6102C512M	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D52	-	2SD780A-52	Si-npn	AF, 80V, 300mA, 200mW, B=135..220, 100MHz	SOT-23	16ta	-	3a	Nec
D52	-	AZ23C7V5-V-G	Z-diode	Dual, 7.13..7.88V, Zzt=7Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D52A	-	ML6102C522M	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D53	-	2SD780A-53	Si-npn	AF, 80V, 300mA, 200mW, B=170..270, 100MHz	SOT-23	16ta	-	3a	Nec
D53	-	AZ23C8V2-V-G	Z-diode	Dual, 7.79..8.61V, Zzt=7Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D53	-	XC61CC3502M	Vdet-IC	3.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
D53	-	XE61CC3545MR	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
D53A	-	ML6102C532M	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D54	-	2SD780A-54	Si-npn	AF, 80V, 300mA, 200mW, B=200..320, 100MHz	SOT-23	16ta	-	3a	Nec
D54	-	AZ23C9V1-V-G	Z-diode	Dual, 8.65..9.56V, Zzt=10Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D54A	-	ML6102C542M	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D55	-	2SD780A-55	Si-npn	AF, 80V, 300mA, 200mW, B=250..400, 100MHz	SOT-23	16ta	-	3a	Nec
D55	-	AZ23C10-V-G	Z-diode	Dual, 9.50..10.50V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D55	-	LN61FC3512M	Vdet-IC	3.5V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
D55	-	XC61FC3512M	Vdet-IC	3.5V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
D55	-	XC61HC3512MR	Vdet-IC	3.5V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
D55A	-	ML6102C552M	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D56	-	AZ23C11-V-G	Z-diode	Dual, 10.45..11.55V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D56	-	LN61FC3542M	Vdet-IC	3.5V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
D56	-	XC61FC3542M	Vdet-IC	3.5V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
D56	-	XC61HC3542MR	Vdet-IC	3.5V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
D56A	-	ML6102C562M	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D57	-	AZ23C12-V-G	Z-diode	Dual, 11.40..12.60V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D57	-	LN61FC3552M	Vdet-IC	3.5V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
D57	-	XC61FC3552M	Vdet-IC	3.5V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
D57	-	XC61HC3552MR	Vdet-IC	3.5V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
D57A	-	ML6102C572M	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D58	-	AZ23C13-V-G	Z-diode	Dual, 12.35..13.65V, Zzt=25Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D58A	-	ML6102C582M	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D59	-	AZ23C15-V-G	Z-diode	Dual, 14.25..15.75V, Zzt=30Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D59A	-	ML6102C592M	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D5C	-	KIC3201T-35	LVR-IC	LDO, 3.5V±2%, 400mA	TSM	16cg	VR1	3f	Kec
D5s	-	BBY57-05W	C-diode	Dual, VCO-Tuning, 10V, 20mA, 16.5/18.6pF(4/1V)	SOT-323	16dg	-	3c	Inf
D6	-	2SA1252-6	Si-pnp	AF, 60V, 150mA, 200mW, 100MHz, B=200..400	SOT-23	16ta	-	3a	San
D6	-	2SA1687-7	Si-pnp	GP, AF, 60V, 150mA, 150mW, B=300..600, 130MHz	MCP	16ta	-	3a	San
D6	-	AP431ASR	Vref-IC	Adjustable, Precision, Shunt, 2.495V±0.5%	SOT-23	16rd	RF1	3b	Di
D6	-	AP8821C-36GC	Vdet-IC	3.6V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
D6	-	AP8821C-36GT	Vdet-IC	3.6V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
D6	-	AP8821C-36PC	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
D6	-	AP8821C-36PT	Vdet-IC	3.6V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
D6	-	AZ23C4V3-V	Z-diode	Dual, 4.09..4.52V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D6	-	BCW33R	Si-pnp	GP, 32V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16te	-	3a	Phi
D6	-	ELM89361B	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
D6	-	ELM9736NBB	Vdet-IC	3.6V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
D6	-	MMBC1622D6	Si-npn	GP, AF, 40V, 100mA, 350mW, B=200..400, >100MHz	SOT-23	16ta	-	3a	Sam
D6	-	MMBD4148CA	Si-diode	Dual, Sw, Fast, 75V, 200mA, 350mW, <4ns, 4pF	SOT-23	16df	-	3a	F
D6	-	R3111N362A	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
D6	-	R3130N46EC	Vdet-IC	4.6V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
D6	-	RT9809-21CV	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
D6	-	TC54VC3602ECB	Vdet-IC	3.6V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
D6.2	-	CZMA6.2	Z-diode	Dual, 6.2V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D6.2	-	TZT6V2AW	Z-diode	Dual, 5.8..6.6V, Izt=5mA, Zzt=10Ω, 300mW	SOT-23	16df	-	3a	Ttr
D6.8	-	CZMA6V8	Z-diode	Dual, 6.8V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D6.8	-	TZT6V8AW	Z-diode	Dual, 6.4..7.2V, Izt=5mA, Zzt=15Ω, 300mW	SOT-23	16df	-	3a	Ttr
D60	-	AZ23C16-V-G	Z-diode	Dual, 15.20..16.80V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D60A	-	ML6102C602M	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Mlc
D61	-	AZ23C18-V-G	Z-diode	Dual, 17.10..18.90V, Zzt=50Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D62	-	AZ23C20-V-G	Z-diode	Dual, 19.0..21.00V, Zzt=50Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D63	-	AZ23C22-V-G	Z-diode	Dual, 20.90..23.10V, Zzt=55Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D63	-	XC61CC3602M	Vdet-IC	3.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
D63	-	XE61CC3645MR	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
D64	-	AZ23C24-V-G	Z-diode	Dual, 22.80..25.20V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D65	-	AZ23C27-V-G	Z-diode	Dual, 25.65..28.35V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D65	-	LN61FC3612M	Vdet-IC	3.6V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
D65	-	XC61FC3612M	Vdet-IC	3.6V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
D65	-	XC61HC3612MR	Vdet-IC	3.6V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
D66	-	AZ23C30-V-G	Z-diode	Dual, 28.50..31.50V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D66	-	LN61FC3642M	Vdet-IC	3.6V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
D66	-	XC61FC3642M	Vdet-IC	3.6V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
D66	-	XC61HC3642MR	Vdet-IC	3.6V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
D67	-	AZ23C33-V-G	Z-diode	Dual, 31.35..34.65V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D67	-	LN61FC3652M	Vdet-IC	3.6V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
D67	-	XC61FC3652M	Vdet-IC	3.6V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
D67	-	XC61HC3652MR	Vdet-IC	3.6V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
D68	-	AZ23C36-V-G	Z-diode	Dual, 34.20..37.80V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D69	-	AZ23C39-V-G	Z-diode	Dual, 37.05..40.95V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D6C	-	KIC3201T-36	LVR-IC	LDO, 3.6V±2%, 400mA	TSM	16cg	VR1	3f	Kec
D7	-	2SA1252-7	Si-pnp	AF, 60V, 150mA, 200mW, 100MHz, B=300..600	SOT-23	16ta	-	3a	San
D7	-	2SA1687-6	Si-pnp	GP, AF, 60V, 150mA, 150mW, B=200..400, 130MHz	MCP	16ta	-	3a	San
D7	-	AP8821C-37GC	Vdet-IC	3.7V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
D7	-	AP8821C-37GT	Vdet-IC	3.7V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
D7	-	AP8821C-37PC	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
D7	-	AP8821C-37PT	Vdet-IC	3.7V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
D7	-	AZ23C4V7-V	Z-diode	Dual, 4.47..4.94V, Zzt=78Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D7	-	ELM89371B	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
D7	-	ELM9737NBB	Vdet-IC	3.7V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
D7	-	ILC5062IC37X	Vdet-IC	3.7V±2%, -Reset PPO	SOT-323	16vdb	VD7	3d	Imp
D7	-	ILC5062M37X	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
D7	-	KN4L3M	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1/R2=4k7/4k7	SOT-416	16ta	-	3a	Nec
D7	-	MMBC1622D7	Si-npn	GP, AF, 40V, 100mA, 350mW, B=300..600, >100MHz	SOT-23	16ta	-	3a	Sam
D7	-	R3111N372A	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
D7	-	R3130N47EC	Vdet-IC	4.7V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
D7	-	RT9809-22CV	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
D7	-	TC54VC3702ECB	Vdet-IC	3.7V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
D7.5	-	CZMA7V5	Z-diode	Dual, 7.5V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D7.5	-	TZT7V5AW	Z-diode	Dual, 7.0..7.9V, Izt=5mA, Zzt=15Ω, 300mW	SOT-23	16df	-	3a	Ttr
D70	-	AZ23C43-V-G	Z-diode	Dual, 40.85..45.15V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D71	-	AZ23C47-V-G	Z-diode	Dual, 44.65..49.35V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D71	-	BCW60A	Si-npn	GP, 32V, 200mA, 250mW, B=120..220, 250MHz	SOT-23	16ta	-	3a	Phi
D72	-	AZ23C51-V-G	Z-diode	Dual, 48.45 53.55V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D73	-	BA579A	PIN-diode	Dual, VHF/UHF, 30V, 20mA	SOT-23	16df	-	3a	Ste
D73	-	XC61CC3702M	Vdet-IC	3.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
D73	-	XE61CC3745MR	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
D74	-	BA579C	PIN-diode	Dual, VHF/UHF, 30V, 20mA, Vf<1V(20mA)	SOT-23	16df	-	3a	Ste
D74	-	BAT54AW	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-323	16df	-	3a	Ste
D75	-	BA579S	PIN-diode	Dual, VHF/UHF, 30V, 20mA, Vf<1V(20mA)	SOT-23	16dl	-	3a	Ste
D75	-	LN61FC3712M	Vdet-IC	3.7V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
D75	-	XC61FC3712M	Vdet-IC	3.7V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
D75	-	XC61HC3712MR	Vdet-IC	3.7V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
D76	-	BAR18	Si-diode	Schottky, 70V, 50mA, 250mW, <2pF	SOT-23	16dc	-	3a	Ste
D76	-	BAS70	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dc	-	3a	Ste
D76	-	CMPD6263	Si-diode	Schottky, Sw, 70V, 15mA, Vf(If=1mA)<0.395..0.41V, <2pF	SOT-23	16dc	-	3a	Cen
D76	-	LN61FC3742M	Vdet-IC	3.7V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
D76	-	XC61FC3742M	Vdet-IC	3.7V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
D76	-	XC61HC3742MR	Vdet-IC	3.7V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
D77	-	BAT54CW	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-323	16dg	-	3a	Ste
D77	-	BCF32R	Si-npn	GP, AF, LN, 32V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16te	-	3a	Phi
D77	-	LN61FC3752M	Vdet-IC	3.7V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
D77	-	XC61FC3752M	Vdet-IC	3.7V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
D77	-	XC61HC3752MR	Vdet-IC	3.7V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
D78	-	BAT54SW	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-323	16dl	-	3a	Ste
D7A	-	ILC5062AIC37X	Vdet-IC	3.7V±1%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
D7A	-	ILC5062AM37X	Vdet-IC	3.7V±1%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
D7C	-	KIC3201T-37	LVR-IC	LDO, 3.7V±2%, 400mA	TSM	16cg	VR1	3f	Kec
D7p	-	BCF32	Si-npn	GP, AF, LN, 32V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhH
D7t	-	BCF32	Si-npn	GP, AF, LN, 32V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhM
D7W	-	BCF32	Si-npn	GP, AF, LN, 32V, 100mA, 250mW, B=200..450, >100MHz	SOT-23	16ta	-	3a	PhC
D8	-	AP8821C-38GC	Vdet-IC	3.8V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
D8	-	AP8821C-38GT	Vdet-IC	3.8V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
D8	-	AP8821C-38PC	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
D8	-	AP8821C-38PT	Vdet-IC	3.8V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
D8	-	AZ23C5V1-V	Z-diode	Dual, 4.85..5.36V, Zzt=60Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs
D8	-	BZX84C2V7	Z-diode	2.5..2.9V, Zzt=100Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
D8	-	ELM89381B	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
D8	-	ELM9738NBB	Vdet-IC	3.8V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
D8	-	MMBC1622D8	Si-npn	GP, AF, 40V, 100mA, 350mW, B=450..900, >100MHz	SOT-23	16ta	-	3a	Sam
D8	-	R3111N382A	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
D8	-	R3130N48EC	Vdet-IC	4.8V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
D8	-	RT9809-23CV	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
D8	-	TC54VC3802ECB	Vdet-IC	3.8V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
D8-	-	RT9809-23PV	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
D8.2	-	CZMA8V2	Z-diode	Dual, 8.2V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D8.2	-	TZT8V2AW	Z-diode	Dual, 7.7..8.7V, Izt=5mA, Zzt=15Ω, 300mW	SOT-23	16df	-	3a	Ttr
D81	-	BCF33R	Si-npn	GP, AF, LN, 32V, 0.1A, 300MHz	SOT-23	16te	-	3a	Phi
D83	-	XC61CC3802M	Vdet-IC	3.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
D83	-	XE61CC3845MR	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
D85	-	BAT17DS	Si-diode	Dual, Schottky, 4V, 130mA, Vf<0.6V(10mA), Cd<0.75pF	SOT-23	16dl	-	3a	Ste
D85	-	LN61FC3812M	Vdet-IC	3.8V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
D85	-	XC61FC3812M	Vdet-IC	3.8V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
D85	-	XC61HC3812MR	Vdet-IC	3.8V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
D86	-	BAT54	Si-diode	SBR, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dc	-	3a	Ste
D86	-	LN61FC3842M	Vdet-IC	3.8V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
D86	-	XC61FC3842M	Vdet-IC	3.8V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
D86	-	XC61HC3842MR	Vdet-IC	3.8V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
D87	-	BAT54C	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dg	-	3a	Ste
D87	-	LN61FC3852M	Vdet-IC	3.8V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
D87	-	XC61FC3852M	Vdet-IC	3.8V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
D87	-	XC61HC3852MR	Vdet-IC	3.8V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
D88	-	BAT54S	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dl	-	3a	Ste
D8C	-	KIC3201T-38	LVR-IC	LDO, 3.8V±2%, 400mA	TSM	16cg	VR1	3f	Kec
D8p	-	BCF33	Si-npn	GP, AF, LN, 32V, 100mA, 300MHz	SOT-23	16ta	-	3a	Phi
D9	-	1SS401	Si-diode	Schottky, Sw, 20V, 300mA, 100mW, Vf<0.45V(300mA), <46pF	SOT-323	16dc	-	3a	Tos
D9	-	AP8821C-39GC	Vdet-IC	3.9V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
D9	-	AP8821C-39GT	Vdet-IC	3.9V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
D9	-	AP8821C-39PC	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
D9	-	AP8821C-39PT	Vdet-IC	3.9V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
D9	-	AZ23C5V6-V	Z-diode	Dual, 5.32..5.88V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Vs





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D9	-	BZX84C12	Z-diode	11.4..12.7V, Zzt=25Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
D9	-	ELM89391B	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
D9	-	ELM9739NBB	Vdet-IC	3.9V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
D9	-	R3111N392A	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
D9	-	RT9809-24CV	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
D9	-	TC54VC3902ECB	Vdet-IC	3.9V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
D9.1	-	CZMA9.1	Z-diode	Dual, 9.1V±5%, Ifrm=250mA, 300mW	SOT-23	16df	-	3a	Cdi
D9.1	-	TZT9V1AW	Z-diode	Dual, 8.5..9.6V, Izt=5mA, Zzt=15Ω, 300mW	SOT-23	16df	-	3a	Ttr
D93	-	XC61CC3902M	Vdet-IC	3.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
D93	-	XE61CC3945MR	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
D94	-	BAR42	Si-diode	Schottky, 30V, 100mA, 250mW, Vf<1V(100mA), 7pF, <5ns	SOT-23	16dc	-	3a	Ste
D95	-	BAR43	Si-diode	Schottky, 30V, 100mA, 250mW, Vf<1V(100mA), 7pF, <5ns	SOT-23	16dc	-	3a	Ste
D95	-	LN61FC3912M	Vdet-IC	3.9V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
D95	-	XC61FC3912M	Vdet-IC	3.9V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
D95	-	XC61HC3912MR	Vdet-IC	3.9V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
D96	-	BAS70-04	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dl	-	3a	Ste
D96	-	CMPD6263S	Si-diode	Dual, Schottky, Sw, 70V, 15mA, Vf(If=1mA)<0.395..0.41V, <2pF	SOT-23	16dl	-	3a	Cen
D96	-	LN61FC3942M	Vdet-IC	3.9V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
D96	-	XC61FC3942M	Vdet-IC	3.9V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
D96	-	XC61HC3942MR	Vdet-IC	3.9V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
D97	-	BAS70-05	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dg	-	3a	Ste
D97	-	CMPD6263C	Si-diode	Dual, Schottky, Sw, 70V, 15mA, Vf(If=1mA)<0.395..0.41V, <2pF	SOT-23	16dl	-	3a	Cen
D97	-	LN61FC3952M	Vdet-IC	3.9V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
D97	-	XC61FC3952M	Vdet-IC	3.9V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
D97	-	XC61HC3952MR	Vdet-IC	3.9V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
D98	-	BAS70-06	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16df	-	3a	Ste
D98	-	CMPD6263A	Si-diode	Dual, Schottky, Sw, 70V, 15mA, Vf(If=1mA)<0.395..0.41V, <2pF	SOT-23	16df	-	3a	Cen
D9C	-	AV8050S-C	Si-npn	AF-Amp, 30V, 700mA, 1W, B=120..200, >100MHz	SOT-23	16ta	-	3a	Avi
D9C	-	KIC3201T-39	LVR-IC	LDO, 3.9V±2%, 400mA	TSM	16cg	VR1	3f	Kec
D9C-	-	2SD1781KPT-Q	Si-npn	AF, Sw, 32V, 800mA, B=180..390, 150MHz	SOT-23	16ta	-	3a	Chm
D9D	-	AV8050S-D	Si-npn	AF-Amp, 30V, 700mA, 1W, B=160..300, >100MHz	SOT-23	16ta	-	3a	Avi
D9E	-	AV8050S-E	Si-npn	AF-Amp, 30V, 700mA, 1W, B=280..400, >100MHz	SOT-23	16ta	-	3a	Avi
dA	-	BU45K254G	Vdet-IC	2.5V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Da	-	BD49K27G	Vdet-IC	2.7V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
DA	-	2SC4919	Si-npn	AF, Mute, 25V, 200mA, 150mW, B=800..3200, 240MHz	SMCP	16ta	-	3a	San
DA	-	AX1110R	LVR-IC	LDO, Adjustable 1.25..5V, 350mA	SOT-23L	16cm	VR20	3b	Axl
DA	-	AZ23C2V7	Z-diode	Dual, 2.57..2.84V, Zzt=83Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
DA	-	BCW67A	Si-pnp	AF, Sw, 45V, 800mA, 330mW, B>100, >100MHz	SOT-23	16ta	-	3a	Ste
DA	-	MEZ03-2.7-T2	Z-diode	2.57..2.84V, Izt=5mA, Zzt=83Ω, 300mW	SOT-23	16df	-	3a	Mts
DA	-	MMBZ4708	Z-diode	22V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
DA	-	RT9809-25CV	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DA	-	SSM3K03FE	n-MOSFET	LogL, 20V, 100mA, <12Ω(10mA)	SOT-23	16fh	-	3a	Tos
DA	-	TC1275-5ENB	Vdet-IC	3.06V±2%, -Reset PPO	SOT-23	16vda	VD7	3d	Mcc
DA	-	TZT2V7AW	Z-diode	Dual, 2.57..2.84V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
DA	-	XC62RP3002M	LVR-IC	LDO, 3.0V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
DA5	-	BAR43S	Si-diode	Dual, Schottky, 30V, 100mA, Vf<1V(100mA), 7pF, <5ns	SOT-23	16dl	-	3a	Ste
DA5	-	CMPSH-3S	Si-diode	Dual, Schottky, 30V, 100mA, Vf(If=100mA)<1V, 2pF, <5ns	SOT-23	16dl	-	3a	Cen
DA6	-	BZV53A	Z-diode	6.2V±5%, Izt=7.5mA, Zzt=15Ω	SOT-23	16di	-	3a	Ts
DA7	-	BZV53B	Z-diode	6.2V±5%, Izt=7.5mA, Zzt=15Ω	SOT-23	16di	-	3a	Ts
DA8	-	BZV54A	Z-diode	6.4V±5%, Izt=0.5mA, Zzt=200Ω	SOT-23	16di	-	3a	Ts
DA9	-	BZV54B	Z-diode	6.4V±5%, Izt=0.5mA, Zzt=200Ω	SOT-23	16di	-	3a	Ts
DAG	-	2SC5343SF-G	Si-npn	GP, 60V, 150mA, 200mW, >80MHz, B=200..400	SOT-23F	18ta	-	3a	Auk
DAG	-	2SC5343S-G	Si-npn	GP, 60V, 150mA, 200mW, >80MHz, B=200..400	SOT-23	16ta	-	3a	Auk
DAL	-	2SC5343SF-L	Si-npn	GP, 60V, 150mA, 200mW, >80MHz, B=300..700	SOT-23F	18ta	-	3a	Auk
DAL	-	2SC5343S-L	Si-npn	GP, 60V, 150mA, 200mW, >80MHz, B=300..700	SOT-23	16ta	-	3a	Auk
DAO	-	2SC5343SF-O	Si-npn	GP, 60V, 150mA, 200mW, >80MHz, B=70..140	SOT-23F	18ta	-	3a	Auk
DAO	-	2SC5343S-O	Si-npn	GP, 60V, 150mA, 200mW, >80MHz, B=70..140	SOT-23	16ta	-	3a	Auk
DAY	-	2SC5343SF-Y	Si-npn	GP, 60V, 150mA, 200mW, >80MHz, B=120..240	SOT-23F	18ta	-	3a	Auk
DAY	-	2SC5343S-Y	Si-npn	GP, 60V, 150mA, 200mW, >80MHz, B=120..240	SOT-23	16ta	-	3a	Auk
dB	-	BU45K264G	Vdet-IC	2.6V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Db	-	BD49K28G	Vdet-IC	2.8V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
DB	-	AZ23C3V0	Z-diode	Dual, 2.85..3.15V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
DB	-	BCW67B	Si-pnp	AF, Sw, 45V, 800mA, 330mW, B>160, >100MHz	SOT-23	16ta	-	3a	Ste
DB	-	MEZ03-3.0-T2	Z-diode	2.85..3.15V, Izt=5mA, Zzt=95Ω, 300mW	SOT-23	16df	-	3a	Mts
DB	-	RT9809-26CV	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DB	-	TC1275-10ENB	Vdet-IC	2.88V±2%, -Reset PPO	SOT-23	16vda	VD7	3d	Mcc
DB	-	TZT3V0AW	Z-diode	Dual, 2.85..3.15V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
DB	-	XC62RP3102M	LVR-IC	LDO, 3.1V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
DB	cg	2SA1669	Si-pnp	UHF, 20V, 50mA, 200mW, B>15, 3GHz	SOT-23	16ta	-	3a	San
DB-	-	RT9809-26PV	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DB1	-	BAR43A	Si-diode	Dual, Schottky, 30V, 100mA, Vf<1V(100mA), 7pF, <5ns	SOT-23	16df	-	3a	Ste
DB1	-	CMPSH-3A	Si-diode	Dual, Schottky, 30V, 100mA, Vf(If=100mA)<1V, 2pF, <5ns	SOT-23	16df	-	3a	Cen
DB2	-	BAR43C	Si-diode	Dual, Schottky, 30V, 100mA, Vf<1V(100mA), 7pF, <5ns	SOT-23	16dg	-	3a	Ste
DB2	-	CMPSH-3C	Si-diode	Dual, Schottky, 30V, 100mA, Vf(If=100mA)<1V, 2pF, <5ns	SOT-23	16dg	-	3a	Cen
DB6	-	BAT46AW	Si-diode	Dual, SBD, 100V, 150mA, Vf<1V(250mA), 6pF	SOT-323	16df	-	3b	Ste
DB8	-	BAT46CW	Si-diode	Dual, SBD, 100V, 150mA, Vf<1V(250mA), 6pF	SOT-323	16df	-	3b	Ste
DB8	-	SDB310WKUF	Si-diode	Dual, Rectifier, 30V, 200mA, 150mW, <10pF, <5ns	SOT-323F	18dg	-	3a	Auk
dC	-	BU45K274G	Vdet-IC	2.7V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Dc	-	BD49K29G	Vdet-IC	2.9V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
DC	-	AZ23C3V3	Z-diode	Dual, 3.14..3.47V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
DC	-	BCW67C	Si-pnp	AF, Sw, 45V, 800mA, 330mW, B>250, >100MHz	SOT-23	16ta	-	3a	Ste
DC	-	MEZ03-3.3-T2	Z-diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 300mW	SOT-23	16df	-	3a	Mts
DC	-	MMBZ4695	Z-diode	8.7V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
DC	-	RT9809-27CV	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DC	-	SSM3K04FE	n-MOSFET	LogL, 20V, 100mA, <12Ω(10mA)	SOT-23	16fh	-	3a	Tos
DC	-	TC1275-20ENB	Vdet-IC	2.55V±2%, -Reset PPO	SOT-23	16vda	VD7	3d	Mcc
DC	-	TZT3V3AW	Z-diode	Dual, 3.14..3.47V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
DC	-	UNR31A9	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=1k/10k	SSSMini3	18ta	-	3a	Pan
DC	-	XC62RP3202M	LVR-IC	LDO, 3.2V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
DC-	-	RT9809-27PV	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DC4	-	DTC124XK	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	SOT-23	16ta	-	3a	Itt
dD	-	BU45K284G	Vdet-IC	2.8V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Dd	-	BD49K30G	Vdet-IC	3.0V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
DD	-	2SC2463-D	Si-npn	AF, 55V, 100mA, 150mW, B=250..500	SOT-23	16ta	-	3a	Ren
DD	-	2SC3441-D	Si-npn	Relay-Drv, 55V, 400mA, 150mW, B=90..180, 150MHz	SC-59	16ta	-	3a	Mit
DD	-	2SC4933-D	Si-npn	GP, 55V, 150mA, 150mW, 200MHz, B=135..270	SOT-323	16ta	-	3a	Ren
DD	-	AZ23C3V6	Z-diode	Dual, 3.42..3.78V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
DD	-	MEZ03-3.6-T2	Z-diode	3.42..3.78V, Izt=5mA, Zzt=95Ω, 300mW	SOT-23	16df	-	3a	Mts
DD	-	MMBZ4696	Z-diode	9.1V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
DD	-	RT9809-28CV	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DD	-	SSM3J02F	p-MOSFET	LogL, 30V, 600mA, <0.7Ω(500mA)	SOT-23	16fh	-	3a	Tos
DD	-	TZT3V6AW	Z-diode	Dual, 3.42..3.78V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
DD	-	XC62RP3302M	LVR-IC	LDO, 3.3V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
DDP	-	TPC6.8	TVS	Vbr=6.12..7.48V, Vrwm=5.50V, Ipp=139.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
dE	-	BU45K294G	Vdet-IC	2.9V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
De	-	BD49K31G	Vdet-IC	3.1V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
DE	-	2SC2463-E	Si-npn	AF, 55V, 100mA, 150mW, B=400..800	SOT-23	16ta	-	3a	Ren
DE	-	2SC3441-E	Si-npn	Relay-Drv, 55V, 400mA, 150mW, B=150..300, 150MHz	SC-59	16ta	-	3a	Mit
DE	-	2SC4933-E	Si-npn	GP, 55V, 150mA, 150mW, 200MHz, B=200..400	SOT-323	16ta	-	3a	Ren
DE	-	AZ23C3V9	Z-diode	Dual, 3.71..4.10V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
DE	-	MEZ03-3.9-T2	Z-diode	3.71..4.10V, Izt=5mA, Zzt=95Ω, 300mW	SOT-23	16df	-	3a	Mts
DE	-	MMBZ4697	Z-diode	10V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
DE	-	RT9809-29CV	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DE	-	SSM3J01F	p-MOSFET	LogL, 30V, 700mA, <0.6Ω(350mA)	SOT-23	16fh	-	3a	Tos
DE	-	TZT3V9AW	Z-diode	Dual, 3.71..4.10V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
DE	-	UNR31AA	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=100k/100k	SSSMini3	18ta	-	3a	Pan
DE	-	XC62RP3402M	LVR-IC	LDO, 3.4V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
DE-	-	RT9809-29PV	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DEO	-	ISL60002BIH318Z	Vref-IC	High precision, 1.800V±1.0mV	SOT-23	16vj	VR1	3d	Isl
DEP	-	ISL60002CIH318Z	Vref-IC	High precision, 1.800V±2.5mV	SOT-23	16vj	VR1	3d	Isl
DEP	-	TPC6.8A	TVS	Vbr=6.45..7.14V, Vrwm=5.80V, Ipp=143.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
DEQ	-	ISL60002DIH318Z	Vref-IC	High precision, 1.800V±5.0mV	SOT-23	16vj	VR1	3d	Isl
DEY	-	ISL60002BIH320Z	Vref-IC	High precision, 2.048V±1.0mV	SOT-23	16vj	VR1	3d	Isl
DEZ	-	ISL60002CIH320Z	Vref-IC	High precision, 2.048V±2.5mV	SOT-23	16vj	VR1	3d	Isl
dF	-	BU45K304G	Vdet-IC	3.0V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Df	-	BD49K32G	Vdet-IC	3.2V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
DF	-	2SC2463-F	Si-npn	AF, 55V, 100mA, 150mW, B=600..1200	SOT-23	16ta	-	3a	Ren
DF	-	2SC3441-F	Si-npn	Relay-Drv, 55V, 400mA, 150mW, B=250..500, 150MHz	SC-59	16ta	-	3a	Mit
DF	-	2SC4933-F	Si-npn	GP, 55V, 150mA, 150mW, 200MHz, B=300..600	SOT-323	16ta	-	3a	Ren
DF	-	AZ23C4V3	Z-diode	Dual, 4.09..4.52V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
DF	-	BCW68F	Si-pnp	AF, Sw, 60V, 800mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	Ste
DF	-	MEZ03-4.3-T2	Z-diode	4.09..4.52V, Izt=5mA, Zzt=95Ω, 300mW	SOT-23	16df	-	3a	Mts
DF	-	MMBZ4698	Z-diode	11V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
DF	-	RT9809-30CV	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DF	-	SSM3K05FU	n-MOSFET	LogL, 20V, 500mA, <1.2Ω(500mA)	SOT-323	16fh	-	3a	Tos
DF	-	TZT4V3AW	Z-diode	Dual, 4.09..4.52V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
DF	-	XC62RP3502M	LVR-IC	LDO, 3.5V±2%, 6mA, 150mW	SOT-23	16cg	VR1	3d	Tor
DF-	-	RT9809-30PV	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DFA	-	ISL60002DIH320Z	Vref-IC	High precision, 2.048V±5.0mV	SOT-23	16vj	VR1	3d	Isl
DFB	-	ISL60002BIH310Z	Vref-IC	High precision, 1.024V±1.0mV	SOT-23	16vj	VR1	3d	Isl



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DFC	-	ISL60002CIH310Z	Vref-IC	High precision, 1.024V±2.5mV	SOT-23	16vj	VR1	3d	Isl
DFD	-	ISL60002DIH310Z	Vref-IC	High precision, 1.024V±5.0mV	SOT-23	16vj	VR1	3d	Isl
DFH	-	ISL60002DIH330Z	Vref-IC	High precision, 3.000V±5.0mV	SOT-23	16vj	VR1	3d	Isl
DFI	-	ISL60002BIH330Z	Vref-IC	High precision, 3.000V±1.0mV	SOT-23	16vj	VR1	3d	Isl
DFJ	-	ISL60002CIH330Z	Vref-IC	High precision, 3.000V±2.5mV	SOT-23	16vj	VR1	3d	Isl
DFK	-	ISL60002BIH326Z	Vref-IC	High precision, 2.600V±1.0mV	SOT-23	16vj	VR1	3d	Isl
DFL	-	ISL60002CIH326Z	Vref-IC	High precision, 2.600V±2.5mV	SOT-23	16vj	VR1	3d	Isl
DFM	-	ISL60002DIH326Z	Vref-IC	High precision, 2.600V±5.0mV	SOT-23	16vj	VR1	3d	Isl
DFP	-	TPC7.5	TVS	Vbr=6.75..8.25V, Vrwm=6.05V, Ipp=128.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
dG	-	BU45K314G	Vdet-IC	3.1V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Dg	-	BD49K33G	Vdet-IC	3.3V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
DG	-	2SC2713-GR	Si-npn	GP, AF, 120V, 100mA, 150mW, B=200..400, 100MHz	SOT-23	16ta	-	3a	Tos
DG	-	2SC4117-GR	Si-npn	AF-Amp, 120V, 100mA, 100mW, 100MHz, B=200..400	SOT-323	16ta	-	3a	Tos
DG	-	2SC5343UF-G	Si-npn	GP, 60V, 150mA, 200mW, >80MHz, B=200..400	SOT-323F	18ta	-	3a	Auk
DG	-	2SC5343U-G	Si-npn	GP, 60V, 150mA, 200mW, >80MHz, B=200..400	SOT-323	16ta	-	3a	Auk
DG	-	AZ23C4V7	Z-diode	Dual, 4.47..4.94V, Zzt=78Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
DG	-	BCW68G	Si-pnp	AF, Sw, 60V, 800mA, 350mW, B>160, >100MHz	SOT-23	16ta	-	3a	Ste
DG	-	MEZ03-4.7-T2	Z-diode	4.47..4.94V, Izt=5mA, Zzt=78Ω, 300mW	SOT-23	16df	-	3a	Mts
DG	-	RT9809-31CV	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DG	-	TZT4V7AW	Z-diode	Dual, 4.47..4.94V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
DGP	-	TPC7.5A	TVS	Vbr=7.13..7.88V, Vrwm=6.40V, Ipp=133.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
dH	-	BU45K324G	Vdet-IC	3.2V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Dh	-	BD49K34G	Vdet-IC	3.4V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
DH	-	1SS358	Si-diode	Dual, SBD, VHF/UHF-det/mix, 55V, 10mA, Vf<0.35V(1mA), 0.45pF	CP	16dl	-	3a	San
DH	-	AZ23C5V1	Z-diode	Dual, 4.85..5.36V, Zzt=60Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
DH	-	BCW68H	Si-pnp	AF, Sw, 60V, 800mA, 350mW, B>250, >100MHz	SOT-23	16ta	-	3a	Ste
DH	-	MEZ03-5.1-T2	Z-diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 300mW	SOT-23	16df	-	3a	Mts
DH	-	MMBD2000	Si-diode	Sw, 30V, 200mA, 150mW, Vf<0.95V(10mA), <2pF	SOT-323	16dc	-	3a	Mot
DH	-	MMBZ4699	Z-diode	12V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
DH	-	RT9809-32CV	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DH	-	SSM3J05FU	p-MOSFET	LogL, 20V, 200mA, <4Ω(500mA)	SOT-323	16fh	-	3a	Tos
DH	-	TZT5V1AW	Z-diode	Dual, 4.85..5.36V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
DHP	-	TPC8.2	TVS	Vbr=7.38..9.02V, Vrwm=6.63V, Ipp=120.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
DI	-	AZ23C5V6	Z-diode	Dual, 5.32..5.88V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
DI	-	MEZ03-5.6-T2	Z-diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 300mW	SOT-23	16df	-	3a	Mts
DI	-	MMBD2005	Si-diode	Dual, Sw, 30V, 200mA, 150mW, Vf<0.95V(10mA), <2pF	SOT-323	16df	-	3a	Mot
DI	-	SiP809CREUADT	Vdet-IC	2.63V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
DI	-	TZT5V6AW	Z-diode	Dual, 5.32..5.88V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
DI-	-	2SC3867	Si-npn	UHF/VHF, 20V, 50mA, 150mW, B=20..200, >1.4GHz	SOT-346	16te	-	3a	Ren
DJ	-	AZ23C6V2	Z-diode	Dual, 5.89..6.51V, Zzt=10Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
DJ	-	MEZ03-6.2-T2	Z-diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 300mW	SOT-23	16df	-	3a	Mts
DJ	-	MMBZ4700	Z-diode	13V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
DJ	-	RT9809-33CV	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DJ	-	TZT6V2AW	Z-diode	Dual, 5.89..6.51V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
dK	-	BU45K334G	Vdet-IC	3.3V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Dk	-	BD49K35G	Vdet-IC	3.5V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
DK	-	2SK2909	n-MOSFET	V-MOS, LogL, 20V, 0.8A, <0.3Ω(0.5A)	SOT-23	16fh	-	3a	San
DK	-	AZ23C14	Z-diode	Dual, 13.30..14.70V, Zzt=25Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
DK	-	MEZ03-14-T2	Z-diode	13.30..14.70V, Izt=5mA, Zzt=25Ω, 300mW	SOT-23	16df	-	3a	Mts
DK	-	MMBZ4701	Z-diode	14V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
DK	-	RT9809-34CV	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DK	-	SiP809C27EUADT	Vdet-IC	2.7V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
DK	-	TZT14AW	Z-diode	Dual, 13.30..14.70V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
DKP	-	TPC8.2A	TVS	Vbr=7.79..8.61V, Vrwm=7.02V, Ipp=124.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
DKs	-	BCX42	Si-pnp	AF, 125V, 800mA, 330mW, B>63, 150MHz	SOT-23	16ta	-	3c	Inf
DL	-	2SA1343	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/22k	CP	16ta	-	3a	San
DL	-	2SC2713-BL	Si-npn	GP, AF, 120V, 100mA, 150mW, B=350..700, 100MHz	SOT-23	16ta	-	3a	Tos
DL	-	2SC4117-BL	Si-npn	AF-Amp, 120V, 100mA, 100mW, 100MHz, B=350..700	SOT-323	16ta	-	3a	Tos
DL	-	2SC5343UF-L	Si-npn	GP, 60V, 150mA, 200mW, >80MHz, B=300..700	SOT-323F	18ta	-	3a	Auk
DL	-	2SC5343U-L	Si-npn	GP, 60V, 150mA, 200mW, >80MHz, B=300..700	SOT-323	16ta	-	3a	Auk
DL	-	AZ23C17	Z-diode	Dual, 16.15..17.85V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
DL	-	MEZ03-17-T2	Z-diode	16.15..17.85V, Izt=5mA, Zzt=40Ω, 300mW	SOT-23	16df	-	3a	Mts
DL	-	RT9809-35CV	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DL	-	SiP809CSEUADT	Vdet-IC	2.93V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
DL	-	TZT17AW	Z-diode	Dual, 16.15..17.85V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
DL	-	UNR31AE	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=47k/22k	SSSMini3	18ta	-	3a	Pan
DlI	-	MEZ03-6.8-T2	Z-diode	6.46..7.14V, Izt=5mA, Zzt=8Ω, 300mW	SOT-23	16df	-	3a	Mts
DLP	-	TPC9.1	TVS	Vbr=8.19..10.0V, Vrwm=7.37V, Ipp=109.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
dM	-	BU45K344G	Vdet-IC	3.4V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Dm	-	BD49K36G	Vdet-IC	3.6V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DM	-	AZ23C28	Z-diode	Dual, 26.60..29.40V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
DM	-	MEZ03-28-T2	Z-diode	26.60..29.40V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16df	-	3a	Mts
DM	-	MMBZ4702	Z-diode	15V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
DM	-	RT9809-36CV	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DM	-	SiP809CTEUADT	Vdet-IC	3.08V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
DM	-	TZT28AW	Z-diode	Dual, 26.60..29.40V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
DMP	-	TPC9.1A	TVS	Vbr=8.65..9.55V, Vrwm=7.78V, Ipp=112.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
dN	-	BU45K354G	Vdet-IC	3.5V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Dn	-	BD49K37G	Vdet-IC	3.7V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
DN	-	MMBZ4703	Z-diode	16V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
DN	-	RT9809-37CV	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DN	-	SiP809CJEUADT	Vdet-IC	4.0V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
DN	-	UNR31AF	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=4k7/10k	SSSMini3	18ta	-	3a	Pan
DNP	-	TPC10	TVS	Vbr=9.0..11.0V, Vrwm=8.10V, Ipp=100.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
DO	-	2SA1620-O	Si-pnp	GP, 80V, 300mA, 150mW, B=70..140, 100MHz	SOT-23	16ta	-	3a	Tos
DO	-	2SC5343UF-O	Si-npn	GP, 60V, 150mA, 200mW, >80MHz, B=70..140	SOT-323F	18ta	-	3a	Auk
DO	-	2SC5343U-O	Si-npn	GP, 60V, 150mA, 200mW, >80MHz, B=70..140	SOT-323	16ta	-	3a	Auk
DO	-	AZ23C2V4	Z-diode	Dual, 2.28..2.52V, Zzt=85Ω, Izt=5mA, 300mW	SOT-23	16df	-	3a	Pjt
DO	-	MEZ03-2.4-T2	Z-diode	2.28..2.52V, Izt=5mA, Zzt=85Ω, 300mW	SOT-23	16df	-	3a	Mts
DO	-	SiP809CMEUADT	Vdet-IC	4.38V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
DO	-	TZT2V4AW	Z-diode	Dual, 2.28..2.52V, Izt=5.0mA, 300mW	SOT-23	16df	-	3a	Ttr
dP	-	BU45K364G	Vdet-IC	3.6V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Dp	-	BD49K38G	Vdet-IC	3.8V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
DP	-	MAX809BJUR	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
DP	-	MMBZ4704	Z-diode	17V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
DP	-	RT9809-38CV	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DP	-	SiP809CLEUADT	Vdet-IC	4.63V±1.5%, -Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
DPP	-	TPC10A	TVS	Vbr=9.50..10.5V, Vrwm=8.55V, Ipp=103.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
DQ	-	2PB1219AQ	Si-pnp	GP, 60V, 150mA, 200mW, B=85..170, 100MHz	SOT-323	16ta	-	3a	PhH
DQ	-	2PB710AQ	Si-pnp	GP, 60V, 500mA, 250mW, B=85..170, >100MHz	SC-59	16ta	-	3a	Phi
DQ	-	2SB1219A-Q	Si-pnp	GP, 60V, 500mA, 150mW, B=85..170, 20MHz	SOT-323	16ta	-	3a	Pan
DQ	-	2SB710A-Q	Si-pnp	GP, AF, 60V, 500mA, 200mW, B=85..170, 200MHz	SC-59	16ta	-	3a	Pan
DQ	-	MAX809BLUR	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
DQ	-	RT9809-39CV	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DQP	-	TPC11	TVS	Vbr=9.90..12.1V, Vrwm=8.92V, Ipp=92.6A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
DQW	-	2PB1219AQ	Si-pnp	GP, 60V, 150mA, 200mW, B=85..170, 100MHz	SOT-323	16ta	-	3a	PhC
dR	-	BU45K374G	Vdet-IC	3.7V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Dr	-	BD49K39G	Vdet-IC	3.9V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
DR	-	2PB1219AR	Si-pnp	GP, 60V, 150mA, 200mW, B=120..240, 100MHz	SOT-323	16ta	-	3a	PhH
DR	-	2PB710AR	Si-pnp	GP, 60V, 500mA, 250mW, B=120..240, >120MHz	SC-59	16ta	-	3a	Phi
DR	-	2SB1219A-R	Si-pnp	GP, 60V, 500mA, 150mW, B=120..240, 20MHz	SOT-323	16ta	-	3a	Pan
DR	-	2SB710A-R	Si-pnp	GP, AF, 60V, 500mA, 200mW, B=120..240, 200MHz	SC-59	16ta	-	3a	Pan
DR	-	MAX809BMUR	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
DR	-	RT9809-40CV	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DR	-	SRA2211E	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=10k	SOT-523	16ta	-	3a	Auk
DR	-	SRA2211EF	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=10k	SOT-523F	18ta	-	3a	Auk
DR	-	SRA2211U	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	SOT-323	16ta	-	3a	Auk
DR	-	SRA2211UF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	SOT-323F	18ta	-	3a	Auk
DR	-	SRA2212UF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=100k	SOT-323F	18ta	-	3a	Auk
DRP	-	TPC11A	TVS	Vbr=10.5..11.6V, Vrwm=9.40V, Ipp=96.2A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
DRW	-	2PB1219AR	Si-pnp	GP, 60V, 150mA, 200mW, B=120..240, 100MHz	SOT-323	16ta	-	3a	PhC
dS	-	BU45K384G	Vdet-IC	3.8V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
DS	-	2PB1219AS	Si-pnp	GP, 60V, 150mA, 200mW, B=170..340, 100MHz	SOT-323	16ta	-	3a	PhH
DS	-	2PB710AS	Si-pnp	GP, 60V, 500mA, 250mW, B=170..340, >140MHz	SC-59	16ta	-	3a	Phi
DS	-	2SB1219A-S	Si-pnp	GP, 60V, 500mA, 150mW, B=170..340, 20MHz	SOT-323	16ta	-	3a	Pan
DS	-	2SB710A-S	Si-pnp	GP, AF, 60V, 500mA, 200mW, B=170..340, 200MHz	SC-59	16ta	-	3a	Pan
DS	-	RT9809-41CV	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DS	-	SiP809CREUDDT	Vdet-IC	2.63V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
DS	-	TWT4148S-221F5	Si-diode	Dual, Sw, 20V, 10mA, Vf<1.0V(10mA), <3pF	F5T	18dl	-	3a	Ttr
DS	-	TWT4148S-221WT	Si-diode	Dual, Sw, 20V, 10mA, Vf<1.0V(10mA), <3pF	SOT-523	18dl	-	3a	Ttr
DS3	-	2SA1728-3	Si-pnp	Sw, 50V, 500mA, 200mW, B=70..130, 350MHz, 60/170ns	SOT-23	16ta	-	3a	San
DS4	-	2SA1728-4	Si-pnp	Sw, 50V, 500mA, 200mW, B=100..200, 350MHz, 60/170ns	SOT-23	16ta	-	3a	San
DS5	-	2SA1728-5	Si-pnp	Sw, 50V, 500mA, 200mW, B=140..280, 350MHz, 60/170ns	SOT-23	16ta	-	3a	San
DSAA	-	MAX809BTUR	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
DSP	-	TPC12	TVS	Vbr=10.8..13.2V, Vrwm=9.72V, Ipp=86.7A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
DSW	-	2PB1219AS	Si-pnp	GP, 60V, 150mA, 200mW, B=170..340, 100MHz	SOT-323	16ta	-	3a	PhC
dT	-	BU45K394G	Vdet-IC	3.9V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
DT	-	2SC4112	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=2.2k	SOT-23	16ta	-	3a	San
DT	-	BCW67RA	Si-pnp	AF, Sw, 45V, 800mA, 330mW, B>100, >100MHz	SOT-23	16ta	-	3a	Sie
DT	-	MMBZ4705	Z-diode	18V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DT	-	RT9809-42CV	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DT	-	SiP809C27EUDDT	Vdet-IC	2.7V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
DTAA	-	MAX809BSUR	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
DTP	-	TPC12A	TVS	Vbr=11.4..12.6V, Vrwm=10.2V, Ipp=89.8A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
DtQ	-	2PB1219AQ	Si-pnp	GP, 60V, 150mA, 200mW, B=85..170, 100MHz	SOT-323	16ta	-	3a	PhM
DtR	-	2PB1219AR	Si-pnp	GP, 60V, 150mA, 200mW, B=120..240, 100MHz	SOT-323	16ta	-	3a	PhM
DtS	-	2PB1219AS	Si-pnp	GP, 60V, 150mA, 200mW, B=170..340, 100MHz	SOT-323	16ta	-	3a	PhM
DU	-	BCW67RB	Si-pnp	AF, Sw, 45V, 800mA, 330mW, B>160, >100MHz	SOT-23	16ta	-	3a	Sie
DU	-	MMBZ4706	Z-diode	19V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
DU	-	RT9809-43CV	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DUP	-	TPC13	TVS	Vbr=11.7..14.3V, Vrwm=10.5V, Ipp=78.9A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
DV	-	MAX809BRUR	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
DV	-	MMBZ4707	Z-diode	20V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
DV	-	RT9809-44CV	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DV	-	SiP809CSEEUDDT	Vdet-IC	2.93V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
DV1	-	2SD596-1	Si-npn	AF, 30V, 700mA, 200mW, B=110..180, 170MHz	SOT-23	16ta	-	3a	Nec
DV2	-	2SD596-2	Si-npn	AF, 30V, 700mA, 200mW, B=135..220, 170MHz	SOT-23	16ta	-	3a	Nec
DV3	-	2SD596-3	Si-npn	AF, 30V, 700mA, 200mW, B=170..270, 170MHz	SOT-23	16ta	-	3a	Nec
DV4	-	2SD596-4	Si-npn	AF, 30V, 700mA, 200mW, B=200..320, 170MHz	SOT-23	16ta	-	3a	Nec
DV5	-	2SD596-5	Si-npn	AF, 30V, 700mA, 200mW, B=250..400, 170MHz	SOT-23	16ta	-	3a	Nec
DVP	-	2SC4755-P	Si-npn	Hi-sp Sw, 25V, 300mA, 150mW, 500MHz, B=40..80	SOT-323	16ta	-	3a	Pan
DVP	-	2SC4782-P	Si-npn	Sw, Hi-sp, 25V, 200mA, 200mW, 500MHz, B=40..80	SC-59	16ta	-	3a	Pan
DVP	-	TPC13A	TVS	Vbr=12.4..13.7V, Vrwm=11.1V, Ipp=82.4A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
DVQ	-	2SC4755-Q	Si-npn	Hi-sp Sw, 25V, 300mA, 150mW, 500MHz, B=60..120	SOT-323	16ta	-	3a	Pan
DVQ	-	2SC4782-Q	Si-npn	Sw, Hi-sp, 25V, 200mA, 200mW, 500MHz, B=60..120	SC-59	16ta	-	3a	Pan
DVR	-	2SC4755-R	Si-npn	Hi-sp Sw, 25V, 300mA, 150mW, 500MHz, B=90..200	SOT-323	16ta	-	3a	Pan
DVR	-	2SC4782-R	Si-npn	Sw, Hi-sp, 25V, 200mA, 200mW, 500MHz, B=90..200	SC-59	16ta	-	3a	Pan
dW	-	BU45K404G	Vdet-IC	4.0V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
DW	-	BCW67RC	Si-pnp	AF, Sw, 45V, 800mA, 330mW, B>250, >100MHz	SOT-23	16ta	-	3a	Sie
DW	-	CHT4126WPT	Si-pnp	AF, Sw, 25V, 200mA, B=120..360, 250MHz	SOT-323	16ta	-	3a	Chm
DW	-	RT9809-45CV	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DW	-	SiP809CTEUDDT	Vdet-IC	3.08V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
DW1	-	2SD780-1	Si-npn	AF, 60V, 300mA, 200mW, B=110..180, 100MHz	SOT-23	16ta	-	3a	Nec
DW2	-	2SD780-2	Si-npn	AF, 60V, 300mA, 200mW, B=135..220, 100MHz	SOT-23	16ta	-	3a	Nec
DW3	-	2SD780-3	Si-npn	AF, 60V, 300mA, 200mW, B=170..270, 100MHz	SOT-23	16ta	-	3a	Nec
DW4	-	2SD780-4	Si-npn	AF, 60V, 300mA, 200mW, B=200..320, 100MHz	SOT-23	16ta	-	3a	Nec
DW5	-	2SD780-5	Si-npn	AF, 60V, 300mA, 200mW, B=250..400, 100MHz	SOT-23	16ta	-	3a	Nec
DWAA	-	MAX810BLUR	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
DWP	-	TPC15	TVS	Vbr=13.5..16.5V, Vrwm=12.1V, Ipp=68.2A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
dX	-	BU45K414G	Vdet-IC	4.1V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
DX	-	BCW68RF	Si-pnp	AF, Sw, 60V, 800mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	Sie
DX	-	RT9809-46CV	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DX	-	SiP809CJEUDDT	Vdet-IC	4.0V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
DXAA	-	MAX810BMUR	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
DXP	-	TPC15A	TVS	Vbr=14.3..15.8V, Vrwm=12.8V, Ipp=70.8A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
dY	-	BU45K424G	Vdet-IC	4.2V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Dy	-	BD49K40G	Vdet-IC	4.0V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
DY	-	2SA1620-Y	Si-pnp	GP, 80V, 300mA, 150mW, B=120..240, 100MHz	SOT-23	16ta	-	3a	Tos
DY	-	2SC3397	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/22k	CP	16ta	-	3a	San
DY	-	2SC5343UF-Y	Si-npn	GP, 60V, 150mA, 200mW, >80MHz, B=120..240	SOT-323F	18ta	-	3a	Auk
DY	-	2SC5343U-Y	Si-npn	GP, 60V, 150mA, 200mW, >80MHz, B=120..240	SOT-323	16ta	-	3a	Auk
DY	-	BCW68RG	Si-pnp	AF, Sw, 60V, 800mA, 350mW, B>160, >100MHz	SOT-23	16ta	-	3a	Sie
DY	-	MMBZ4710	Z-diode	25V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
DY	-	RT9809-47CV	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DY	-	SiP809CMEUDDT	Vdet-IC	4.38V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
DYAA	-	MAX810BTUR	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
DYP	-	TPC16	TVS	Vbr=14.4..17.6V, Vrwm=12.9V, Ipp=63.8A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
DZ	-	BCW68RH	Si-pnp	AF, Sw, 60V, 800mA, 350mW, B>250, >100MHz	SOT-23	16ta	-	3a	Sie
DZ	-	MMBZ4709	Z-diode	24V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
DZ	-	RT9809-48CV	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
DZ	-	SiP809CLEUDDT	Vdet-IC	4.63V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
DZAA	-	MAX810BSUR	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
DZP	-	TPC16A	TVS	Vbr=15.2..16.8V, Vrwm=13.6V, Ipp=66.7A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
e	-	AX6901EA	Vdet-IC	2.93V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Axl
E	-	IMBT3904	Si-npn	GP, 60V, 200mA, 250mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	Itt
E	-	IMBT3906	Si-pnp	GP, 40V, 200mA, 250mW, B=60..300, >250MHz	SOT-23	16ta	-	3a	Itt
E	cr	ELM7526NEB	Vdet-IC	2.6V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
E	cs	ELM7526CEB	Vdet-IC	2.6V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
E0	-	AP1702ATW	Vdet-IC	4.63V±1.5%, +Reset PPO	TSOT-23-3L	16vdc	VD7	3b	Ana
E0	-	AP1702AW	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23-3L	16vdc	VD7	3b	Ana



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E0	-	AP8821C-40GC	Vdet-IC	4.0V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
E0	-	AP8821C-40GT	Vdet-IC	4.0V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
E0	-	AP8821C-40PC	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
E0	-	AP8821C-40PT	Vdet-IC	4.0V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
E0	-	BZX84C62	Z-diode	58..66V, Zzt=215Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
E0	-	ELM89401B	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23	16vj	VR1	3d	Elm
E0	-	ELM9740NBB	Vdet-IC	4.0V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
E0	-	HSMP-3810	PIN-diode	RF Att, 100V, 1A(1µs), <0.35pF, <3Ω(100mA), 3GHz	SOT-23	16dc	-	3a	Agi
E0	-	HSMP-381B	PIN-diode	RF Att, 100V, 1A(1µs), <0.35pF, <3Ω(100mA), 3GHz	SOT-323	16dc	-	3a	Agi
E0	-	R3111N402A	Vdet-IC	4V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
E0	-	R3130N26EC3	Vdet-IC	2.6V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
E0	-	TC54VC4002ECB	Vdet-IC	4.0V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
E0	-	TS810CXA	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
E0	cg	BL8552CB3TR30	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E0	ch	BL8552CB3TR20	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E03	-	XC61CC4002M	Vdet-IC	4.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
E03	-	XE61CC4045MR	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
E05	-	LN61FC4012M	Vdet-IC	4.0V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
E05	-	XC61FC4012M	Vdet-IC	4.0V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
E05	-	XC61HC4012MR	Vdet-IC	4.0V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
E06	-	LN61FC4042M	Vdet-IC	4.0V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
E06	-	XC61FC4042M	Vdet-IC	4.0V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
E06	-	XC61HC4042MR	Vdet-IC	4.0V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
E07	-	LN61FC4052M	Vdet-IC	4.0V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
E07	-	XC61FC4052M	Vdet-IC	4.0V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
E07	-	XC61HC4052MR	Vdet-IC	4.0V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
E0C	-	KIC3201T-40	LVR-IC	LDO, 4.0V±2%, 400mA	TSM	16cg	VR1	3f	Kec
E1	-	AP8821C-41GC	Vdet-IC	4.1V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
E1	-	AP8821C-41GT	Vdet-IC	4.1V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
E1	-	AP8821C-41PC	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
E1	-	AP8821C-41PT	Vdet-IC	4.1V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
E1	-	BFS17L	Si-npn	VHF.UHF, 15V, 50mA, 200mW, B=20..150, >1GHz	SOT-23	16ta	-	3a	Mot
E1	-	BFS17W	Si-npn	VHF/UHF, Mix/Osc, 25V, 25mA, 250mW, B=90, 1.6GHz	SOT-323	16ta	-	3a	Phi
E1	-	ELM9741NBB	Vdet-IC	4.1V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
E1	-	MMBZ5231B	Z-diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 350mW	SOT-23	16dc	-	3c	Pjt
E1	-	MMBZ5231BW	Z-diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 150mW	SOT-523	16dc	-	3a	Di
E1	-	MMBZ5231BW	Z-diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOT-323	16dc	-	3c	Pjt
E1	-	PDTD113EK	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/1k	SOT-346	16ta	-	3a	NxM
E1	-	R3111N412A	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
E1	-	R3130N29EC3	Vdet-IC	2.9V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
E1	-	TC54VC4102ECB	Vdet-IC	4.1V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
E1	cg	BL8552CB3TR31	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E1	ch	BL8552CB3TR21	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E11	-	DTA113ZE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=1k/10k	SOT-416	16ta	-	3a	Rhm
E11	-	DTA113ZKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=1k/10k	SOT-346	16ta	-	3a	Rhm
E11A	-	ML6102N113M	Vdet-IC	1.1V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E12A	-	ML6102N123M	Vdet-IC	1.2V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E13	-	DTA143ZE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/47k	SOT-416	16ta	-	3a	Rhm
E13	-	DTA143ZKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/47k	SOT-346	16ta	-	3a	Rhm
E13	-	DTA143ZM	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/47k	VMT3	18ta	-	3a	Rhm
E13	-	XC61CC4102M	Vdet-IC	4.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
E13	-	XE61CC4145MR	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
E13A	-	ML6102N133M	Vdet-IC	1.3V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E14A	-	ML6102N143M	Vdet-IC	1.4V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E15	-	BF747	Si-npn	VHF/UHF TV-Tuner, 20V, 50mA, 300mW, N=40..250, >1.2GHz	SOT-23	16ta	-	3a	Phi
E15	-	LN61FC4112M	Vdet-IC	4.1V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
E15	-	XC61FC4112M	Vdet-IC	4.1V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
E15	-	XC61HC4112MR	Vdet-IC	4.1V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
E15A	-	ML6102N153M	Vdet-IC	1.5V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E16	-	BF547	Si-npn	VHF/UHF-Mix/Osc, 30V, 30mA, 300mW, B=40..250, 1.6GHz	SOT-23	16ta	-	3a	Phi
E16	-	LN61FC4142M	Vdet-IC	4.1V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
E16	-	XC61FC4142M	Vdet-IC	4.1V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
E16	-	XC61HC4142MR	Vdet-IC	4.1V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
E16A	-	ML6102N163M	Vdet-IC	1.6V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E17	-	LN61FC4152M	Vdet-IC	4.1V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
E17	-	XC61FC4152M	Vdet-IC	4.1V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
E17	-	XC61HC4152MR	Vdet-IC	4.1V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
E17A	-	ML6102N173M	Vdet-IC	1.7V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E18A	-	ML6102N183M	Vdet-IC	1.8V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E19A	-	ML6102N193M	Vdet-IC	1.9V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E1C	-	KIC3201T-41	LVR-IC	LDO, 4.1V±2%, 400mA	TSM	16cg	VR1	3f	Kec
E1H	-	BFS17H	Si-npn	VHF.UHF, 25V, 25mA, 330mW, B=70..200, >1GHz	SOT-23	16ta	-	3a	Zx
E1L	-	BFS17L	Si-npn	VHF.UHF, 25V, 25mA, 330mW, B=25..100, >1GHz	SOT-23	16ta	-	3a	Zx
E1O	-	KSC2859-O	Si-npn	AF, 35V, 500mA, 150mW, B=70..140, >300MHz	SOT-23	16ta	-	3a	Sam
E1p	-	BFS17	Si-npn	VHF/UHF, Mix/Osc, 25V, 25mA, 300mW, B=90, 1GHz	SOT-23	16ta	-	3a	Phi
E1Y	-	KSC2859-Y	Si-npn	AF, 35V, 500mA, 150mW, B=120..240, >300MHz	SOT-23	16ta	-	3a	Sam
E2	-	2SA1226-2	Si-pnp	HF, 40V, 30mA, 200mW, B=40..80, >250MHz	SOT-23	16ta	-	3a	Nec
E2	-	AP1702BTW	Vdet-IC	4.38V±1.5%, +Reset PPO	TSOT-23-3L	16vdc	VD7	3b	Ana
E2	-	AP1702BW	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23-3L	16vdc	VD7	3b	Ana
E2	-	AP8821C-42GC	Vdet-IC	4.2V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
E2	-	AP8821C-42GT	Vdet-IC	4.2V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
E2	-	AP8821C-42PC	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
E2	-	AP8821C-42PT	Vdet-IC	4.2V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
E2	-	BAL99	Si-diode	Sw, Fast, 70V, 100mA, 330mW, <4ns	SOT-23	16dr	-	3a	Zx
E2	-	BF547W	Si-npn	VHF/UHF-Mix/Osc, 30V, 50mA, 300mW, B=40..250, 1.6GHz	SOT-323	16ta	-	3a	Phi
E2	-	BFS17A	Si-npn	VHF/UHF, Mix/Osc, 25V, 25mA, 200mW, B=20..150, 2.8GHz	SOT-23	16ta	-	3g	Vs
E2	-	BL8552CB3TR12	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E2	-	ELM9742NBB	Vdet-IC	4.2V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
E2	-	HSMP-3812	PIN-diode	Dual, RF Att, 100V, 1A(1µs), <0.35pF, <3Ω(100mA), 3GHz	SOT-23	16dl	-	3a	Agi
E2	-	HSMP-381C	PIN-diode	Dual, RF Att, 100V, 1A(1µs), <0.35pF, <3Ω(100mA), 3GHz	SOT-323	16dl	-	3a	Agi
E2	-	MMBZ5232B	Z-diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 350mW	SOT-23	16dc	-	3c	Pjt
E2	-	MMBZ5232BW	Z-diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 150mW	SOT-523	16dc	-	3a	Di
E2	-	MMBZ5232BW	Z-diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 200mW	SOT-323	16dc	-	3c	Pjt
E2	-	R3111N422A	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
E2	-	R3113D121C	Vdet-IC	1.2V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
E2	-	R3130N30EC8	Vdet-IC	3V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
E2	-	SPE0532S23RG	ESDP-diode	Dual, Vrwm=5V, Vbr=6..8.5V, 7A, 250W(1ms), Bidir.	SOT-23	16dp	-	3b	Syn
E2	-	TC54VC4202ECB	Vdet-IC	4.2V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
E2	-	TS810CXB	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
E2	cg	BL8552CB3TR32	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E2	ch	BL8552CB3TR22	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E20	cm	XC6382A201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E20	cp	XC6385A201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E20A	-	ML6102N202M	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E21	-	2SK932-21	n-FET	RF, LN, 15V, 50mA, 200mW, Idss=5..8.5mA, Up<1.4V	SOT-23	16fa	-	3a	San
E21	-	GS809C21EUE	Vdet-IC	2.1V±1.5%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
E21	cm	XC6382A211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E21	cp	XC6385A211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E21A	-	ML6102N212M	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E22	-	2SK932-22	n-FET	RF, LN, 15V, 50mA, 200mW, Idss=7.3..12mA, Up<1.4V	SOT-23	16fa	-	3a	San
E22	cm	XC6382A221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E22	cp	XC6385A221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E22A	-	ML6102N222M	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E23	-	2SK932-23	n-FET	RF, LN, 15V, 50mA, 200mW, Idss=10..17mA, Up<1.4V	SOT-23	16fa	-	3a	San
E23	-	DTC143ZE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k/47k	SOT-416	16ta	-	3a	Rhm
E23	-	DTC143ZKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/47k	SOT-346	16ta	-	3a	Rhm
E23	-	DTC143ZM	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k/47k	VMT3	18ta	-	3a	Rhm
E23	-	DTC143ZUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/47k	UMT3	16ta	-	3a	Rhm
E23	-	XC61CC4202M	Vdet-IC	4.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
E23	-	XE61CC4245MR	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
E23	cm	XC6382A231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E23	cp	XC6385A231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E23A	-	ML6102N232M	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E24	-	2SK932-24	n-FET	RF, LN, 15V, 50mA, 200mW, Idss=14.5..24mA, Up<1.4V	SOT-23	16fa	-	3a	San
E24	-	GS809C24EUE	Vdet-IC	2.4V±1.5%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
E24	cm	XC6382A241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E24	cp	XC6385A241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E24A	-	ML6102N242M	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E25	-	LN61FC4212M	Vdet-IC	4.2V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
E25	-	XC61FC4212M	Vdet-IC	4.2V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
E25	-	XC61HC4212MR	Vdet-IC	4.2V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
E25	cm	XC6382A251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E25	cp	XC6385A251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E25A	-	ML6102N252M	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E26	-	GS809CREUE	Vdet-IC	2.63V±1.5%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
E26	-	LN61FC4242M	Vdet-IC	4.2V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
E26	-	XC61FC4242M	Vdet-IC	4.2V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
E26	-	XC61HC4242MR	Vdet-IC	4.2V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
E26	cm	XC6382A261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E26	cp	XC6385A261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E26A	-	ML6102N262M	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E27	-	GS809C27SEUE	Vdet-IC	2.7V±1.5%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
E27	-	LN61FC4252M	Vdet-IC	4.2V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
E27	-	XC61FC4252M	Vdet-IC	4.2V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
E27	-	XC61HC4252MR	Vdet-IC	4.2V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
E27	cm	XC6382A271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E27	cp	XC6385A271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E27A	-	ML6102N272M	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E28	cm	XC6382A281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E28	cp	XC6385A281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E28A	-	ML6102N282M	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E29	-	GS809CSEUE	Vdet-IC	2.93V±1.5%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
E29	cm	XC6382A291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E29	cp	XC6385A291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E29A	-	ML6102N292M	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E2C	-	KIC3201T-42	LVR-IC	LDO, 4.2V±2%, 400mA	TSM	16cg	VR1	3f	Kec
E2p	-	BFS17A	Si-npn	VHF/UHF, Mix/Osc, 25V, 25mA, 200mW, B=20..150, 2.8GHz	SOT-23	16ta	-	3a	Phi
E3	-	1SS190	Si-diode	Sw, U-Fast, 85V, 100mA, 150mW, Vf<1.2V(100mA), <4ns	SC-59	16ak	-	3b	Tos
E3	-	2SA1226-3	Si-pnp	HF, 40V, 30mA, 200mW, B=60..120, >250MHz	SOT-23	16ta	-	3a	Nec
E3	-	2SA1256-3	Si-pnp	HF Amp, 30V, 30mA, 150mW, B=60..120, 230MHz	SOT-23	16ta	-	3a	San
E3	-	2SA1656-3	Si-pnp	GP, FM/RF, 30V, 30mA, 150mW, B=60..120, >320MHz	SOT-23	16ta	-	3a	San
E3	-	2SA1688-3	Si-pnp	GP, FM/RF, 30V, 30mA, 150mW, B=60..120, >320MHz	MCP	16ta	-	3a	San
E3	-	AP1702CTW	Vdet-IC	4.0V±1.5%, +Reset PPO	TSOT-23-3L	16vdc	VD7	3b	Ana
E3	-	AP1702CW	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23-3L	16vdc	VD7	3b	Ana
E3	-	AP8821C-43GC	Vdet-IC	4.3V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
E3	-	AP8821C-43GT	Vdet-IC	4.3V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
E3	-	AP8821C-43PC	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
E3	-	AP8821C-43PT	Vdet-IC	4.3V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
E3	-	BAR99	Si-diode	Sw, 70V, 100mA, 330mW, Vf<1.25V(150mA), <6ns	SOT-23	16dc	-	3a	Zx
E3	-	BL8552CB3TR13	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E3	-	ELM9743NBB	Vdet-IC	4.3V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
E3	-	HSMP-3813	PIN-diode	Dual, RF Att, 100V, 1A(1µs), <0.35pF, <3Ω(100mA), 3GHz	SOT-23	16df	-	3a	Agi
E3	-	HSMP-381E	PIN-diode	Dual, RF Att, 100V, 1A(1µs), <0.35pF, <3Ω(100mA), 3GHz	SOT-323	16df	-	3a	Agi
E3	-	MMBZ5233B	Z-diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 350mW	SOT-23	16dc	-	3c	Pjt
E3	-	MMBZ5233BW	Z-diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 150mW	SOT-523	16dc	-	3a	Di
E3	-	MMBZ5233BW	Z-diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOT-323	16dc	-	3c	Pjt
E3	-	PDTD123EK	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/2.2k	SOT-346	16ta	-	3a	NxM
E3	-	R3111N432A	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
E3	-	R3113D131C	Vdet-IC	1.3V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
E3	-	R3130N46EC5	Vdet-IC	4.6V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
E3	-	TC54VC4302ECB	Vdet-IC	4.3V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
E3	-	TS810CXC	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
E3	cg	BL8552CB3TR33	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E3	ch	BL8552CB3TR23	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E30	-	GS809CTEUE	Vdet-IC	3.08V±1.5%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
E30	cm	XC6382A301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E30	cp	XC6385A301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E30A	-	ML6102N302M	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E31	cm	XC6382A311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E31	cp	XC6385A311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E31A	-	ML6102N312M	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E32	-	DTA123JKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/47k	SOT-346	16ta	-	3a	Rhm
E32	cm	XC6382A321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E32	cp	XC6385A321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E32A	-	ML6102N322M	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E33	-	XC61CC4302M	Vdet-IC	4.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
E33	-	XE61CC4345MR	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
E33	cm	XC6382A331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E33	cp	XC6385A331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E33A	-	ML6102N332M	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E34	cm	XC6382A341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E34	cp	XC6385A341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E34A	-	ML6102N342M	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E35	-	LN61FC4312M	Vdet-IC	4.3V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
E35	-	XC61FC4312M	Vdet-IC	4.3V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
E35	-	XC61HC4312MR	Vdet-IC	4.3V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
E35	cm	XC6382A351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E35	cp	XC6385A351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E35A	-	ML6102N352M	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E36	-	LN61FC4342M	Vdet-IC	4.3V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E36	-	XC61FC4342M	Vdet-IC	4.3V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
E36	-	XC61HC4342MR	Vdet-IC	4.3V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
E36	cm	XC6382A361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E36	cp	XC6385A361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E36A	-	ML6102N362M	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E37	-	LN61FC4352M	Vdet-IC	4.3V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
E37	-	XC61FC4352M	Vdet-IC	4.3V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
E37	-	XC61HC4352MR	Vdet-IC	4.3V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
E37	cm	XC6382A371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E37	cp	XC6385A371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E37A	-	ML6102N372M	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E38	cm	XC6382A381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E38	cp	XC6385A381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E38A	-	ML6102N382M	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E39	cm	XC6382A391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E39	cp	XC6385A391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E39A	-	ML6102N392M	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E3C	-	KIC3201T-43	LVR-IC	LDO, 4.3V±2%, 400mA	TSM	16cg	VR1	3f	Kec
E4	-	2SA1226-4	Si-pnp	HF, 40V, 30mA, 200mW, B=90..180, >250MHz	SOT-23	16ta	-	3a	Nec
E4	-	2SA1256-4	Si-pnp	HF Amp, 30V, 30mA, 150mW, B=90..180, 230MHz	SOT-23	16ta	-	3a	San
E4	-	2SA1656-4	Si-pnp	GP, FM/RF, 30mA, 150mW, B=90..180, >320MHz	SOT-23	16ta	-	3a	San
E4	-	2SA1688-4	Si-pnp	GP, FM/RF, 30mA, 150mW, B=90..180, >320MHz	MCP	16ta	-	3a	San
E4	-	AP1702DTW	Vdet-IC	3.08V±1.5%, +Reset PPO	TSOT-23-3L	16vdc	VD7	3b	Ana
E4	-	AP1702DW	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23-3L	16vdc	VD7	3b	Ana
E4	-	AP8821C-44GC	Vdet-IC	4.4V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
E4	-	AP8821C-44GT	Vdet-IC	4.4V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
E4	-	AP8821C-44PC	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
E4	-	AP8821C-44PT	Vdet-IC	4.4V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
E4	-	BB404E	C-diode	Dual, 10V, 47.5..18pF(2..8V), 100MHz	SOT-23	16dg	-	3a	Itt
E4	-	BL8552CB3TR14	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E4	-	CHN203KPT	Si-diode	Dual, Sw, 85V, 125mA, Vf<1.2V(100mA), 4ns	SOT-23	16dg	-	3a	Chm
E4	-	ELM9744NBB	Vdet-IC	4.4V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
E4	-	HSMP-3814	PIN-diode	Dual, RF Att, 100V, 1A(1µs), <0.35pF, <3Ω(100mA), 3GHz	SOT-23	16dg	-	3a	Agi
E4	-	HSMP-381F	PIN-diode	Dual, RF Att, 100V, 1A(1µs), <0.35pF, <3Ω(100mA), 3GHz	SOT-323	16dg	-	3a	Agi
E4	-	ILC5062IC44X	Vdet-IC	4.4V±2%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
E4	-	ILC5062M44X	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
E4	-	KA4L3N	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/10k	SOT-416	16ta	-	3a	Nec
E4	-	MMBZ5234B	Z-diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 350mW	SOT-23	16dc	-	3c	Pjt
E4	-	MMBZ5234BW	Z-diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 150mW	SOT-523	16dc	-	3a	Di
E4	-	MMBZ5234BW	Z-diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOT-323	16dc	-	3c	Pjt
E4	-	R3111N442A	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
E4	-	R3113D141C	Vdet-IC	1.4V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
E4	-	R3130N46EC3	Vdet-IC	4.6V±1.5%, -Reset ODO, 240ms	SOT-23	16vdc	VD6	3b	Ric
E4	-	TC54VC4402ECB	Vdet-IC	4.4V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
E4	-	TS810CXD	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
E4	cg	BL8552CB3TR34	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E4	ch	BL8552CB3TR24	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E40	-	GS809CJEUE	Vdet-IC	4.0V±1.5%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
E40	cm	XC6382A401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E40	cp	XC6385A401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E40A	-	ML6102N402M	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E41	cm	XC6382A411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E41	cp	XC6385A411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E41A	-	ML6102N412M	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E42	-	DTC123JE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2k2/47k	SOT-416	16ta	-	3a	Rhm
E42	-	DTC123JKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/47k	SOT-346	16ta	-	3a	Rhm
E42	-	DTC123JM	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2k2/47k	VMT3	18ta	-	3a	Rhm
E42	-	DTC123JUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/47k	UMT3	16ta	-	3a	Rhm
E42	cm	XC6382A421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E42	cp	XC6385A421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E42A	-	ML6102N422M	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E43	-	GS809CMEUE	Vdet-IC	4.38V±1.5%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
E43	-	XC61CC4402M	Vdet-IC	4.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
E43	-	XE61CC4445MR	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
E43	cm	XC6382A431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E43	cp	XC6385A431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E43A	-	ML6102N432M	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E44	cm	XC6382A441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E44	cp	XC6385A441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E44A	-	ML6102N442M	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E45	-	LN61FC4412M	Vdet-IC	4.4V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
E45	-	XC61FC4412M	Vdet-IC	4.4V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
E45	-	XC61HC4412MR	Vdet-IC	4.4V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
E45	cm	XC6382A451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E45	cp	XC6385A451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E45A	-	ML6102N452M	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E46	-	GS809CLEUE	Vdet-IC	4.63V±1.5%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
E46	-	LN61FC4442M	Vdet-IC	4.4V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
E46	-	XC61FC4442M	Vdet-IC	4.4V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
E46	-	XC61HC4442MR	Vdet-IC	4.4V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
E46	cm	XC6382A461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E46	cp	XC6385A461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E46A	-	ML6102N462M	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E47	-	LN61FC4452M	Vdet-IC	4.4V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
E47	-	XC61FC4452M	Vdet-IC	4.4V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
E47	-	XC61HC4452MR	Vdet-IC	4.4V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
E47	cm	XC6382A471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E47	cp	XC6385A471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E47A	-	ML6102N472M	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E48	cm	XC6382A481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E48	cp	XC6385A481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E48A	-	ML6102N482M	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E49	cm	XC6382A491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E49	cp	XC6385A491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E49A	-	ML6102N492M	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E4A	-	ILC5062AIC44X	Vdet-IC	4.4V±1%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
E4A	-	ILC5062AM44X	Vdet-IC	4.4V±1%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
E4C	-	KIC3201T-44	LVR-IC	LDO, 4.4V±2%, 400mA	TSM	16cg	VR1	3f	Kec
E5	-	2SA1256-5	Si-pnp	HF Amp, 30V, 30mA, 150mW, B=135..280, 230MHz	SOT-23	16ta	-	3a	San
E5	-	2SA1656-5	Si-pnp	GP, FM/RF, 30mA, 150mW, B=135..270, >320MHz	SOT-23	16ta	-	3a	San
E5	-	2SA1688-5	Si-pnp	GP, FM/RF, 30mA, 150mW, B=135..270, >320MHz	MCP	16ta	-	3a	San
E5	-	AP1702ETW	Vdet-IC	2.93V±1.5%, +Reset PPO	TSOT-23-3L	16vdc	VD7	3b	Ana
E5	-	AP1702EW	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23-3L	16vdc	VD7	3b	Ana
E5	-	AP8821C-45GC	Vdet-IC	4.5V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
E5	-	AP8821C-45GT	Vdet-IC	4.5V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
E5	-	AP8821C-45PC	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
E5	-	AP8821C-45PT	Vdet-IC	4.5V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
E5	-	BFS17AR	Si-npn	VHF/UHF, Mix/Osc, 25V, 25mA, 200mW, B=20..150, 2.8GHz	SOT-23	16te	-	3a	Sil
E5	-	BL8552CB3TR15	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E5	-	ELM9745NBB	Vdet-IC	4.5V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
E5	-	MMBZ5235B	Z-diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 350mW	SOT-23	16dc	-	3c	Pjt
E5	-	MMBZ5235BW	Z-diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 150mW	SOT-523	16dc	-	3a	Di
E5	-	MMBZ5235BW	Z-diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 200mW	SOT-323	16dc	-	3c	Pjt
E5	-	R3111N452A	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
E5	-	R3113D151C	Vdet-IC	1.5V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
E5	-	SP810EK-2-6	Vdet-IC	2.6V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Sip
E5	-	TC54VC4502ECB	Vdet-IC	4.5V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
E5	-	TS810CXE	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
E5	cg	BL8552CB3TR35	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E5	ch	BL8552CB3TR25	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E50	cm	XC6382A501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E50	cp	XC6385A501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E50A	-	ML6102N502M	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E51	cm	XC6382A511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E51	cp	XC6385A511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E51A	-	ML6102N512M	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E52	cm	XC6382A521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E52	cp	XC6385A521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E52A	-	ML6102N522M	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E53	-	XC61CC4502M	Vdet-IC	4.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
E53	-	XE61CC4545MR	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
E53	cm	XC6382A531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E53	cp	XC6385A531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E53A	-	ML6102N532M	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E54	cm	XC6382A541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E54	cp	XC6385A541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E54A	-	ML6102N542M	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E55	-	LN61FC4512M	Vdet-IC	4.5V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
E55	-	XC61FC4512M	Vdet-IC	4.5V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
E55	-	XC61HC4512MR	Vdet-IC	4.5V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E55	cm	XC6382A551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E55	cp	XC6385A551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E55A	-	ML6102N552M	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E56	-	DTA144VKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/10k	SOT-346	16ta	-	3a	Rhm
E56	-	LN61FC4542M	Vdet-IC	4.5V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
E56	-	XC61FC4542M	Vdet-IC	4.5V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
E56	-	XC61HC4542MR	Vdet-IC	4.5V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
E56	cm	XC6382A561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E56	cp	XC6385A561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E56A	-	ML6102N562M	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E57	-	LN61FC4552M	Vdet-IC	4.5V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
E57	-	XC61FC4552M	Vdet-IC	4.5V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
E57	-	XC61HC4552MR	Vdet-IC	4.5V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
E57	cm	XC6382A571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E57	cp	XC6385A571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E57A	-	ML6102N572M	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E58	cm	XC6382A581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E58	cp	XC6385A581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E58A	-	ML6102N582M	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E59	cm	XC6382A591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E59	cp	XC6385A591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E59A	-	ML6102N592M	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E5C	-	KIC3201T-45	LVR-IC	LDO, 4.5V±2%, 400mA	TSM	16cg	VR1	3f	Kec
E6	-	AP1702FTW	Vdet-IC	2.63V±1.5%, +Reset PPO	TSOT-23-3L	16vdc	VD7	3b	Ana
E6	-	AP1702FW	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23-3L	16vdc	VD7	3b	Ana
E6	-	AP8821C-46GC	Vdet-IC	4.6V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
E6	-	AP8821C-46GT	Vdet-IC	4.6V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
E6	-	AP8821C-46PC	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
E6	-	AP8821C-46PT	Vdet-IC	4.6V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
E6	-	BL8552CB3TR16	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E6	-	CHP203KPT	Si-diode	Dual, Sw, 85V, 125mA, Vf<1.2V(100mA), 4ns	SOT-23	16df	-	3a	Chm
E6	-	ELM9746NBB	Vdet-IC	4.6V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
E6	-	ILC5062IC46X	Vdet-IC	4.6V±2%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
E6	-	ILC5062M46X	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
E6	-	R3111N462A	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
E6	-	R3113D161C	Vdet-IC	1.6V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
E6	-	TC54VC4602ECB	Vdet-IC	4.6V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
E6	-	TS810CXF	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
E6	cg	BL8552CB3TR36	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E6	ch	BL8552CB3TR26	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E60	cm	XC6382A601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E60	cp	XC6385A601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E60A	-	ML6102N602M	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
E61	cm	XC6382A611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E61	cp	XC6385A611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E62	cm	XC6382A621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E62	cp	XC6385A621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E63	-	XC61CC4602M	Vdet-IC	4.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
E63	-	XE61CC4645MR	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
E63	cm	XC6382A631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E63	cp	XC6385A631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E64	cm	XC6382A641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E64	cp	XC6385A641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E65	-	LN61FC4612M	Vdet-IC	4.6V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
E65	-	XC61FC4612M	Vdet-IC	4.6V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
E65	-	XC61HC4612MR	Vdet-IC	4.6V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
E65	cm	XC6382A651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E65	cp	XC6385A651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E66	-	DTC144VKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/10k	SOT-346	16ta	-	3a	Rhm
E66	-	LN61FC4642M	Vdet-IC	4.6V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
E66	-	XC61FC4642M	Vdet-IC	4.6V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
E66	-	XC61HC4642MR	Vdet-IC	4.6V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
E66	cm	XC6382A661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E66	cp	XC6385A661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E67	-	LN61FC4652M	Vdet-IC	4.6V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
E67	-	XC61FC4652M	Vdet-IC	4.6V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
E67	-	XC61HC4652MR	Vdet-IC	4.6V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
E67	cm	XC6382A671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E67	cp	XC6385A671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E68	cm	XC6382A681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E68	cp	XC6385A681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E69	cm	XC6382A691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E69	cp	XC6385A691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E6A	-	ILC5062AIC46X	Vdet-IC	4.6V±1%, -Reset PPO	SOT-323	16vdb	VD7	3a	Imp
E6A	-	ILC5062AM46X	Vdet-IC	4.6V±1%, -Reset PPO	SOT-23	16vdb	VD7	3a	Imp
E6C	-	KIC3201T-46	LVR-IC	LDO, 4.6V±2%, 400mA	TSM	16cg	VR1	3f	Kec
E7	-	AP1704ATW	Vdet-IC	4.63V±1.5%, +Reset PPO	TSOT-23-3L	16vda	VD7	3b	Ana
E7	-	AP1704AW	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23-3L	16vda	VD7	3b	Ana
E7	-	AP8821C-47GC	Vdet-IC	4.7V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
E7	-	AP8821C-47GT	Vdet-IC	4.7V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
E7	-	AP8821C-47PC	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
E7	-	AP8821C-47PT	Vdet-IC	4.7V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
E7	-	BL8552CB3TR17	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E7	-	ELM9747NBB	Vdet-IC	4.7V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
E7	-	KN4L3N	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1/R2=4k7/10k	SOT-416	16ta	-	3a	Nec
E7	-	PDTD123YK	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/10k	SOT-346	16ta	-	3a	NxM
E7	-	R3111N472A	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
E7	-	R3113D171C	Vdet-IC	1.7V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
E7	-	TC54VC4702ECB	Vdet-IC	4.7V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
E7	-	TS810RCXA	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Tsc
E7	ch	BL8552CB3TR27	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E70	cm	XC6382A701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E70	cp	XC6385A701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
E73	-	XC61CC4702M	Vdet-IC	4.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
E73	-	XE61CC4745MR	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
E75	-	LN61FC4712M	Vdet-IC	4.7V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
E75	-	XC61FC4712M	Vdet-IC	4.7V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
E75	-	XC61HC4712MR	Vdet-IC	4.7V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
E76	-	LN61FC4742M	Vdet-IC	4.7V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
E76	-	XC61FC4742M	Vdet-IC	4.7V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
E76	-	XC61HC4742MR	Vdet-IC	4.7V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
E77	-	LN61FC4752M	Vdet-IC	4.7V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
E77	-	XC61FC4752M	Vdet-IC	4.7V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
E77	-	XC61HC4752MR	Vdet-IC	4.7V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
E7C	-	KIC3201T-47	LVR-IC	LDO, 4.7V±2%, 400mA	TSM	16cg	VR1	3f	Kec
E8	-	AP1704BTW	Vdet-IC	4.38V±1.5%, +Reset PPO	TSOT-23-3L	16vda	VD7	3b	Ana
E8	-	AP1704BW	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23-3L	16vda	VD7	3b	Ana
E8	-	AP8821C-48GC	Vdet-IC	4.8V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
E8	-	AP8821C-48GT	Vdet-IC	4.8V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
E8	-	AP8821C-48PC	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
E8	-	AP8821C-48PT	Vdet-IC	4.8V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
E8	-	BL8552CB3TR18	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E8	-	BZX84C3V0	Z-diode	2.8..3.2V, Zzt=95Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
E8	-	ELM9748NBB	Vdet-IC	4.8V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
E8	-	R3111N482A	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
E8	-	R3113D181C	Vdet-IC	1.8V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
E8	-	TC54VC4802ECB	Vdet-IC	4.8V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
E8	-	TS810RCXB	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Tsc
E8	ch	BL8552CB3TR28	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E83	-	XC61CC4802M	Vdet-IC	4.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
E83	-	XE61CC4845MR	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
E85	-	LN61FC4812M	Vdet-IC	4.8V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
E85	-	XC61FC4812M	Vdet-IC	4.8V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
E85	-	XC61HC4812MR	Vdet-IC	4.8V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
E86	-	LN61FC4842M	Vdet-IC	4.8V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
E86	-	XC61FC4842M	Vdet-IC	4.8V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
E86	-	XC61HC4842MR	Vdet-IC	4.8V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
E87	-	LN61FC4852M	Vdet-IC	4.8V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
E87	-	XC61FC4852M	Vdet-IC	4.8V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
E87	-	XC61HC4852MR	Vdet-IC	4.8V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
E8C	-	KIC3201T-48	LVR-IC	LDO, 4.8V±2%, 400mA	TSM	16cg	VR1	3f	Kec
E9	-	AP1704CTW	Vdet-IC	4.0V±1.5%, +Reset PPO	TSOT-23-3L	16vda	VD7	3b	Ana
E9	-	AP1704CW	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23-3L	16vda	VD7	3b	Ana
E9	-	AP8821C-49GC	Vdet-IC	4.9V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
E9	-	AP8821C-49GT	Vdet-IC	4.9V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
E9	-	AP8821C-49PC	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
E9	-	AP8821C-49PT	Vdet-IC	4.9V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
E9	-	BL8552CB3TR19	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E9	-	BZX84C13	Z-diode	12.4..14.1V, Zzt=30Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
E9	-	ELM9749NBB	Vdet-IC	4.9V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E9	-	PDTD123TK	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1=2.2k	SOT-346	16ta	-	3a	NxM
E9	-	R3111N492A	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
E9	-	R3113D191C	Vdet-IC	1.9V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
E9	-	TC54VC4902ECB	Vdet-IC	4.9V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
E9	-	TS810RCXC	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Tsc
E9	ch	BL8552CB3TR29	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
E93	-	XC61CC4902M	Vdet-IC	4.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
E93	-	XE61CC4945MR	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
E94	-	DTB114TK	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1=10k	SOT-346	16ta	-	3a	Rhm
E95	-	LN61FC4912M	Vdet-IC	4.9V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
E95	-	XC61FC4912M	Vdet-IC	4.9V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
E95	-	XC61HC4912MR	Vdet-IC	4.9V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
E96	-	LN61FC4942M	Vdet-IC	4.9V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
E96	-	XC61FC4942M	Vdet-IC	4.9V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
E96	-	XC61HC4942MR	Vdet-IC	4.9V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
E97	-	LN61FC4952M	Vdet-IC	4.9V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
E97	-	XC61FC4952M	Vdet-IC	4.9V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
E97	-	XC61HC4952MR	Vdet-IC	4.9V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
E9C	-	KIC3201T-49	LVR-IC	LDO, 4.9V±2%, 400mA	TSM	16cg	VR1	3f	Kec
eA	-	BU45K434G	Vdet-IC	4.3V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Ea	-	BD49K41G	Vdet-IC	4.1V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
EA	-	2SA1532-A	Si-pnp	AF, 30V, 30mA, 150mW, B=50...100, 300MHz	SOT-323	16ta	-	3a	Pan
EA	-	2SC4920	Si-npn-Digi	Mute, Drv, 25V, 100mA, 150mW, 240MHz, R1/R2=4.7k/4.7k	SMCP	16ta	-	3a	San
EA	-	AP1701ATW	Vdet-IC	4.63V±1.5%, -Reset PPO	TSOT-23-3L	16vdc	VD7	3b	Ana
EA	-	AP1701AW	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23-3L	16vdc	VD7	3b	Ana
EA	-	BCW65A	Si-npn	AF, 60V, 800mA, 330mW, B=100..250, >100MHz	SOT-23	16ta	-	3a	All
EA	-	MMBZ4711	Z-diode	27V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
EA	-	TC1276-5ENB	Vdet-IC	3.065V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Mcc
EA	-	TS809CXA	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
EA0	-	XC6902N091MR-G	LVR-IC	-0.9V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EA1	-	LM431BN	Vref-IC	Adjust, Precision, Shunt, 2.44..2.55V±0.4%	SOT-23	16ra	RF2	3a	Ttr
EA1	-	XC6902N101MR-G	LVR-IC	-1.0V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EA2	-	LM431AN	Vref-IC	Adjust, Precision, Shunt, 2.44..2.55V±0.8%	SOT-23	16ra	RF2	3a	Ttr
EA2	-	XC6902N111MR-G	LVR-IC	-1.1V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EA3	-	XC6902N121MR-G	LVR-IC	-1.2V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EA4	-	XC6902N131MR-G	LVR-IC	-1.3V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EA5	-	XC6902N141MR-G	LVR-IC	-1.4V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EA6	-	XC6902N151MR-G	LVR-IC	-1.5V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EA7	-	XC6902N161MR-G	LVR-IC	-1.6V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EA8	-	XC6902N171MR-G	LVR-IC	-1.7V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EA9	-	XC6902N181MR-G	LVR-IC	-1.8V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAA	-	XC6902N191MR-G	LVR-IC	-1.9V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAAA	-	MAX810BRUR	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
EAB	-	XC6902N201MR-G	LVR-IC	-2.0V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAC	-	PL6250-1.5ST23R	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-23	16cg	VR1	3ba	Pln
EAC	-	XC6902N211MR-G	LVR-IC	-2.1V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAD	-	XC6902N221MR-G	LVR-IC	-2.2V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAE	-	PL6250-1.8ST23R	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-23	16cg	VR1	3ba	Pln
EAE	-	XC6902N231MR-G	LVR-IC	-2.3V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAF	-	XC6902N241MR-G	LVR-IC	-2.4V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAG	-	PL6250-2.5ST23R	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-23	16cg	VR1	3ba	Pln
EAH	-	PL6250-2.8ST23R	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-23	16cg	VR1	3ba	Pln
EAH	-	XC6902N251MR-G	LVR-IC	-2.5V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAI	-	PL6250-2.85ST23R	LVR-IC	LDO, 2.85V±2%, 250mA	SOT-23	16cg	VR1	3ba	Pln
EAJ	-	PL6250-3.0ST23R	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-23	16cg	VR1	3ba	Pln
EAK	-	PL6250-3.3ST23R	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-23	16cg	VR1	3ba	Pln
EAK	-	XC6902N261MR-G	LVR-IC	-2.6V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAL	-	PL6250-3.6ST23R	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-23	16cg	VR1	3ba	Pln
EAL	-	XC6902N271MR-G	LVR-IC	-2.7V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAM	-	PL6250-4.0ST23R	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-23	16cg	VR1	3ba	Pln
EAM	-	XC6902N281MR-G	LVR-IC	-2.8V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAN	-	PL6250-4.5ST23R	LVR-IC	LDO, 4.5V±2%, 250mA	SOT-23	16cg	VR1	3ba	Pln
EAN	-	XC6902N291MR-G	LVR-IC	-2.9V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAO	-	2SA1981SF-O	Si-pnp	AF, 35V, 800mA, 200mW, B=100..200, 120MHz	SOT-23F	18ta	-	3a	Auk
EAO	-	2SA1981S-O	Si-pnp	AF, 35V, 800mA, 200mW, B=100..200, 120MHz	SOT-23	16ta	-	3a	Auk
EAP	-	XC6902N301MR-G	LVR-IC	-3.0V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAQ	-	PL6250-5.0ST23R	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-23	16cg	VR1	3ba	Pln
EAR	-	XC6902N311MR-G	LVR-IC	-3.1V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAs	-	BCW65A	Si-npn	AF, 60V, 800mA, 330mW, B=100..250, 170MHz	SOT-23	16ta	-	3c	Inf
EAS	-	XC6902N321MR-G	LVR-IC	-3.2V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EAT	-	PL6250-2.7ST23R	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-23	16cg	VR1	3ba	Pln
EAT	-	XC6902N331MR-G	LVR-IC	-3.3V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAU	-	PL6250-3.2ST23R	LVR-IC	LDO, 3.2V±2%, 250mA	SOT-23	16cg	VR1	3ba	Pln
EAU	-	XC6902N341MR-G	LVR-IC	-3.4V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAV	-	PL6250-3.5ST23R	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-23	16cg	VR1	3ba	Pln
EAV	-	XC6902N351MR-G	LVR-IC	-3.5V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAW	-	PL6250-4.4ST23R	LVR-IC	LDO, 4.4V±2%, 250mA	SOT-23	16cg	VR1	3ba	Pln
EAX	-	XC6902N361MR-G	LVR-IC	-3.6V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAY	-	2SA1981SF-Y	Si-pnp	AF, 35V, 800mA, 200mW, B=160..320, 120MHz	SOT-23F	18ta	-	3a	Auk
EAY	-	2SA1981S-Y	Si-pnp	AF, 35V, 800mA, 200mW, B=160..320, 120MHz	SOT-23	16ta	-	3a	Auk
EAY	-	XC6902N371MR-G	LVR-IC	-3.7V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EAZ	-	XC6902N381MR-G	LVR-IC	-3.8V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
eB	-	BU45K444G	Vdet-IC	4.4V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Eb	-	BD49K42G	Vdet-IC	4.2V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
EB	-	2SA1022-B	Si-pnp	HF, 30V, 30mA, 200mW, B=70..140, 300MHz	SC-59	16ta	-	3a	Pan
EB	-	2SA1532-B	Si-pnp	AF, 30V, 30mA, 150mW, B=70..140, 300MHz	SOT-323	16ta	-	3a	Pan
EB	-	2SA1790-B	Si-pnp	HF, 30V, 30mA, 125mW, 300MHz, B=70..140	SOT-416	16ta	-	3a	Pan
EB	-	2SA1790J-B	Si-pnp	HF, 30V, 30mA, 125mW, 300MHz, B=70..140	SC-89	18ta	-	3a	Pan
EB	-	2SA1888-B	Si-pnp	FM-IF, 30V, 30mA, 300MHz, B=60..120	SOT-23	16te	-	3a	Pan
EB	-	2SK1842	n-FET	IR-Sensor, 40V, Idss>30µA, Up<3V	SOT-23	16fa	-	3a	Pan
EB	-	AAT3560IGY-2.20	Vdet-IC	2.2V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ant
EB	-	AP1701BTW	Vdet-IC	4.38V±1.5%, -Reset PPO	TSOT-23-3L	16vdc	VD7	3b	Ana
EB	-	AP1701BW	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23-3L	16vdc	VD7	3b	Ana
EB	-	BCW65B	Si-npn	AF, 60V, 800mA, 330mW, B=160..400, >100MHz	SOT-23	16ta	-	3a	All
EB	-	HSMP-4810	PIN-diode	Dual, RF Att, 100V, 1A(1µs), <0.35pF, <3Ω(100mA), 3GHz	SOT-23	16dh	-	3a	Agi
EB	-	HSMP-481B	PIN-diode	Dual, RF Att, 100V, 1A(1µs), <0.35pF, <3Ω(100mA), 3GHz	SOT-323	16df	-	3a	Agi
EB	-	SiP809CREUEDT	Vdet-IC	2.63V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
EB	-	TC1276-10ENB	Vdet-IC	2.88V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Mcc
EB	-	TS809CXB	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
EB0	-	XC6902N391MR-G	LVR-IC	-3.9V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EB1	-	XC6902N401MR-G	LVR-IC	-4.0V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EB2	-	XC6902N411MR-G	LVR-IC	-4.1V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EB3	-	XC6902N421MR-G	LVR-IC	-4.2V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EB4	-	XC6902N431MR-G	LVR-IC	-4.3V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EB5	-	XC6902N441MR-G	LVR-IC	-4.4V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EB6	-	XC6902N451MR-G	LVR-IC	-4.5V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EB7	-	XC6902N461MR-G	LVR-IC	-4.6V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EB8	-	XC6902N471MR-G	LVR-IC	-4.7V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EB9	-	XC6902N481MR-G	LVR-IC	-4.8V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBA	-	XC6902N491MR-G	LVR-IC	-4.9V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBB	-	XC6902N501MR-G	LVR-IC	-5.0V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBC	-	XC6902N511MR-G	LVR-IC	-5.1V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBD	-	XC6902N521MR-G	LVR-IC	-5.2V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBE	-	XC6902N531MR-G	LVR-IC	-5.3V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBF	-	XC6902N541MR-G	LVR-IC	-5.4V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBH	-	XC6902N551MR-G	LVR-IC	-5.5V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBK	-	XC6902N561MR-G	LVR-IC	-5.6V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBL	-	XC6902N571MR-G	LVR-IC	-5.7V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBM	-	XC6902N581MR-G	LVR-IC	-5.8V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBN	-	XC6902N591MR-G	LVR-IC	-5.9V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBP	-	2SK1842-P	n-FET	AF imp-conv, 40V, 10mA, 150mW, Idss=30..75µA	SC-59	16fa	-	3a	Pan
EBP	-	XC6902N601MR-G	LVR-IC	-6.0V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBQ	-	2SK1842-Q	n-FET	AF imp-conv, 40V, 10mA, 150mW, Idss=50..100µA	SC-59	16fa	-	3a	Pan
EBQ	-	2SK2380-Q	n-FET	AF imp-conv, 40V, 2mA, 125mW, Idss=50..100µA	SC-89	18fa	-	3a	Pan
EBR	-	2SK1842-R	n-FET	AF imp-conv, 40V, 10mA, 150mW, Idss=70..130µA	SC-59	16fa	-	3a	Pan
EBR	-	2SK2380-R	n-FET	AF imp-conv, 40V, 2mA, 125mW, Idss=70..130µA	SC-89	18fa	-	3a	Pan
EBR	-	XC6902N611MR-G	LVR-IC	-6.1V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBs	-	BCW65B	Si-npn	AF, 60V, 800mA, 330mW, B=160..400, 170MHz	SOT-23	16ta	-	3c	Inf
EBS	-	2SK1842-S	n-FET	AF imp-conv, 40V, 10mA, 150mW, Idss=100..200µA	SC-59	16fa	-	3a	Pan
EBS	-	2SK2380-S	n-FET	AF imp-conv, 40V, 2mA, 125mW, Idss=100..200µA	SC-89	18fa	-	3a	Pan
EBS	-	XC6902N621MR-G	LVR-IC	-6.2V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBT	-	XC6902N631MR-G	LVR-IC	-6.3V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBU	-	XC6902N641MR-G	LVR-IC	-6.4V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBV	-	XC6902N651MR-G	LVR-IC	-6.5V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBX	-	XC6902N661MR-G	LVR-IC	-6.6V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBY	-	XC6902N671MR-G	LVR-IC	-6.7V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EBZ	-	XC6902N681MR-G	LVR-IC	-6.8V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
eC	-	BU45K454G	Vdet-IC	4.5V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Ec	-	BD49K43G	Vdet-IC	4.3V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
EC	-	2SA1022-C	Si-pnp	HF, 30V, 30mA, 200mW, B=110..220, 300MHz	SC-59	16ta	-	3a	Pan

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EC	-	2SA1532-C	Si-pnp	AF, 30V, 30mA, 150mW, B=110..220, 300MHz	SOT-323	16ta	-	3a	Pan
EC	-	2SA1790-C	Si-pnp	HF, 30V, 30mA, 125mW, 300MHz, B=110..220	SOT-416	16ta	-	3a	Pan
EC	-	2SA1790J-C	Si-pnp	HF, 30V, 30mA, 125mW, 300MHz, B=110..220	SC-89	18ta	-	3a	Pan
EC	-	2SA1888-C	Si-pnp	FM-IF, 30V, 30mA, 300MHz, B=100..200	SOT-23	16te	-	3a	Pan
EC	-	2SC2732	Si-npn	UHF, 30V, 20mA, 150mW, B=60, 1GHz	SOT-23	16ta	-	3a	Ren
EC	-	2SC4462	Si-npn	HF, 30V, 20mA, 150mW, B>30, >700MHz	SOT-323	16ta	-	3a	Ren
EC	-	AAT3560IGY-2.50	Vdet-IC	2.5V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ant
EC	-	AP1701CTW	Vdet-IC	4.0V±1.5%, -Reset PPO	TSOT-23-3L	16vdc	VD7	3b	Ana
EC	-	AP1701CW	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23-3L	16vdc	VD7	3b	Ana
EC	-	BCW65C	Si-npn	AF, 60V, 800mA, 330mW, B=250..630, >100MHz	SOT-23	16ta	-	3a	Zx
EC	-	MMBZ4712	Z-diode	28V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
EC	-	MSA1022-C	Si-pnp	RF, 30V, 30mA, 200mW, B=110..220, >150MHz	SC-59	16ta	-	3a	Mot
EC	-	SiP809C27EUEDT	Vdet-IC	2.7V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
EC	-	TC1276-20ENB	Vdet-IC	2.55V±2%, -Reset ODO	SOT-23	16vda	VD6	3d	Mcc
EC	-	TS809CXC	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
EC	-	UNR31AH	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=2k2/10k	SSSMini3	18ta	-	3a	Pan
EC0	-	XC6902N691MR-G	LVR-IC	-6.9V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EC1	-	XC6902N701MR-G	LVR-IC	-7.0V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EC2	-	XC6902N711MR-G	LVR-IC	-7.1V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EC3	-	XC6902N721MR-G	LVR-IC	-7.2V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EC4	-	DTC114EK	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	Itt
EC4	-	XC6902N731MR-G	LVR-IC	-7.3V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EC5	-	XC6902N741MR-G	LVR-IC	-7.4V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EC6	-	XC6902N751MR-G	LVR-IC	-7.5V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EC7	-	XC6902N761MR-G	LVR-IC	-7.6V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EC8	-	XC6902N771MR-G	LVR-IC	-7.7V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EC9	-	XC6902N781MR-G	LVR-IC	-7.8V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECA	-	XC6902N791MR-G	LVR-IC	-7.9V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECB	-	XC6902N801MR-G	LVR-IC	-8.0V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECC	-	XC6902N811MR-G	LVR-IC	-8.1V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECD	-	XC6902N821MR-G	LVR-IC	-8.2V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECE	-	XC6902N831MR-G	LVR-IC	-8.3V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECF	-	XC6902N841MR-G	LVR-IC	-8.4V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECH	-	XC6902N851MR-G	LVR-IC	-8.5V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECK	-	XC6902N861MR-G	LVR-IC	-8.6V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECL	-	XC6902N871MR-G	LVR-IC	-8.7V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECM	-	XC6902N881MR-G	LVR-IC	-8.8V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECN	-	XC6902N891MR-G	LVR-IC	-8.9V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECP	-	XC6902N901MR-G	LVR-IC	-9.0V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECR	-	XC6902N911MR-G	LVR-IC	-9.1V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECs	-	BCW65C	Si-npn	AF, 60V, 800mA, 330mW, B=250..630, 170MHz	SOT-23	16ta	-	3c	Inf
ECS	-	XC6902N921MR-G	LVR-IC	-9.2V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECT	-	XC6902N931MR-G	LVR-IC	-9.3V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECU	-	XC6902N941MR-G	LVR-IC	-9.4V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECV	-	XC6902N951MR-G	LVR-IC	-9.5V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECX	-	XC6902N961MR-G	LVR-IC	-9.6V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECY	-	XC6902N971MR-G	LVR-IC	-9.7V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ECZ	-	XC6902N981MR-G	LVR-IC	-9.8V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
eD	-	BU45K464G	Vdet-IC	4.6V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Ed	-	BD49K44G	Vdet-IC	4.4V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
ED	-	AP1701DTW	Vdet-IC	3.08V±1.5%, -Reset PPO	TSOT-23-3L	16vdc	VD7	3b	Ana
ED	-	AP1701DW	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23-3L	16vdc	VD7	3b	Ana
ED	-	MMBZ4713	Z-diode	30V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
ED	-	SiP809CSEUEDT	Vdet-IC	2.93V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
ED	-	TS809CXD	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
ED	-	UNR31AL	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=4k7/4k7	SSSMini3	18ta	-	3a	Pan
ED0	-	XC6902N991MR-G	LVR-IC	-9.9V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ED1	-	XC6902NA01MR-G	LVR-IC	-10.0V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ED2	-	XC6902NA11MR-G	LVR-IC	-10.1V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ED3	-	XC6902NA21MR-G	LVR-IC	-10.2V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ED4	-	XC6902NA31MR-G	LVR-IC	-10.3V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ED5	-	XC6902NA41MR-G	LVR-IC	-10.4V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ED6	-	XC6902NA51MR-G	LVR-IC	-10.5V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ED7	-	XC6902NA61MR-G	LVR-IC	-10.6V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ED8	-	XC6902NA71MR-G	LVR-IC	-10.7V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
ED9	-	XC6902NA81MR-G	LVR-IC	-10.8V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EDA	-	XC6902NA91MR-G	LVR-IC	-10.9V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EDB	-	XC6902NB01MR-G	LVR-IC	-11.0V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EDC	-	XC6902NB11MR-G	LVR-IC	-11.1V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EDD	-	XC6902NB21MR-G	LVR-IC	-11.2V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EDE	-	XC6902NB31MR-G	LVR-IC	-11.3V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EDF	-	XC6902NB41MR-G	LVR-IC	-11.4V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EDH	-	XC6902NB51MR-G	LVR-IC	-11.5V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EDK	-	XC6902NB61MR-G	LVR-IC	-11.6V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EDL	-	XC6902NB71MR-G	LVR-IC	-11.7V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EDM	-	XC6902NB81MR-G	LVR-IC	-11.8V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EDN	-	XC6902NB91MR-G	LVR-IC	-11.9V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
EDP	-	TPC18	TVS	Vbr=16.2..19.8V, Vrwm=14.5V, Ipp=56.6A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
EDP	-	XC6902NC01MR-G	LVR-IC	-12.0V±1.5%, 500mA, soft start	SOT-23	16ch	VR2	3d	Tor
eE	-	BU45K474G	Vdet-IC	4.7V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Ee	-	BD49K45G	Vdet-IC	4.5V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
EE	-	2SC5814-E	Si-npn	AF-Amp, 60V, 125mA, 150mW, 200MHz, B=150..300	SC-59	16ta	-	3a	Ish
EE	-	2SC5815-E	Si-npn	AF-Amp, 60V, 125mA, 150mW, 200MHz, B=150..300	SOT-323	16ta	-	3a	Ish
EE	-	2SC5816-E	Si-npn	AF-Amp, 60V, 125mA, 125mW, 200MHz, B=150..300	SC-75A	16ta	-	3a	Ish
EE	-	2SC5817-E	Si-npn	AF-Amp, 60V, 125mA, 100mW, 200MHz, B=150..300	T-USM	18ta	-	3a	Ish
EE	-	AP1701ETW	Vdet-IC	2.93V±1.5%, -Reset PPO	TSOT-23-3L	16vdc	VD7	3b	Ana
EE	-	AP1701EW	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23-3L	16vdc	VD7	3b	Ana
EE	-	MMBZ4714	Z-diode	33V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
EE	-	SiP809CTEUEDT	Vdet-IC	3.08V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
EE	-	TS809CXE	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
EE1	-	CHDTA123EEPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/2.2k	SOT-416	16ta	-	3a	Chm
EE2	-	CHDTA143EEPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/4.7k	SOT-416	16ta	-	3a	Chm
EE3	-	CHDTA114EEPT	Si-pnp-Digi	Sw, 50V, 50mA, 250MHz, R1/R2=10k/10k	SOT-416	16ta	-	3a	Chm
EE4	-	CHDTA124EEPT	Si-pnp-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=22k/22k	SOT-416	16ta	-	3a	Chm
EE5	-	CHDTA115EEPT	Si-pnp-Digi	Sw, 50V, 20mA, 250MHz, R1/R2=100k/100k	SOT-416	16ta	-	3a	Chm
EEA	-	CHDTC123EEPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/2.2k	SOT-416	16ta	-	3a	Chm
EEB	-	CHDTC114EEPT	Si-npn-Digi	Sw, 50V, 50mA, 250MHz, R1/R2=10k/10k	SOT-416	16ta	-	3a	Chm
EEC	-	CHDTC124EEPT	Si-npn-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=22k/22k	SOT-416	16ta	-	3a	Chm
EED	-	CHDTC115EEPT	Si-npn-Digi	Sw, 50V, 20mA, 250MHz, R1/R2=100k/100k	SOT-416	16ta	-	3a	Chm
EEP	-	TPC18A	TVS	Vbr=17.1..18.9V, Vrwm=15.3V, Ipp=59.5A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
eF	-	BU45K484G	Vdet-IC	4.8V±1%, -Reset ODO, Td=400ms	SSOP-3	16vdc	VD6	3q	Rhm
Ef	-	BD49K46G	Vdet-IC	4.6V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
EF	-	2SC5814-F	Si-npn	AF-Amp, 60V, 125mA, 150mW, 200MHz, B=250..500	SC-59	16ta	-	3a	Ish
EF	-	2SC5815-F	Si-npn	AF-Amp, 60V, 125mA, 150mW, 200MHz, B=250..500	SOT-323	16ta	-	3a	Ish
EF	-	2SC5816-F	Si-npn	AF-Amp, 60V, 125mA, 125mW, 200MHz, B=250..500	SC-75A	16ta	-	3a	Ish
EF	-	2SC5817-F	Si-npn	AF-Amp, 60V, 125mA, 100mW, 200MHz, B=250..500	T-USM	18ta	-	3a	Ish
EF	-	AP1701FTW	Vdet-IC	2.63V±1.5%, -Reset PPO	TSOT-23-3L	16vdc	VD7	3b	Ana
EF	-	AP1701FW	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23-3L	16vdc	VD7	3b	Ana
EF	-	BCW66F	Si-npn	AF, 75V, 800mA, 330mW, B=100..250, >100MHz	SOT-23	16ta	-	3a	Ste
EF	-	MMBZ4715	Z-diode	36V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
EF	-	TS809CXF	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Tsc
EF	-	UNR31AM	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=2k2/47k	SSSMini3	18ta	-	3a	Pan
EF1	-	AP2121N-1.5TRE1	LVR-IC	LDO, 1.5V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
EF3	-	AP2121N-1.8TRE1	LVR-IC	LDO, 1.8V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
EF4	-	AP2121N-2.5TRE1	LVR-IC	LDO, 2.5V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
EF5	-	AP2121N-2.8TRE1	LVR-IC	LDO, 2.8V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
EF6	-	AP2121N-3.0TRE1	LVR-IC	LDO, 3.0V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
EF7	-	AP2121N-3.2TRE1	LVR-IC	LDO, 3.2V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
EF8	-	AP2121N-3.3TRE1	LVR-IC	LDO, 3.3V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
EF9	-	AP2121N-1.2TRE1	LVR-IC	LDO, 1.2V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
EFP	-	TPC20	TVS	Vbr=18.0..22.0V, Vrwm=16.2V, Ipp=51.5A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
EFs	-	BCW66F	Si-npn	AF, 75V, 800mA, 330mW, B=100..250, >170MHz	SOT-23	16ta	-	3c	Inf
eG	-	BU46K234G	Vdet-IC	2.3V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Eg	-	BD49K47G	Vdet-IC	4.7V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
EG	-	AP1703ATW	Vdet-IC	4.63V±1.5%, -Reset PPO	TSOT-23-3L	16vda	VD7	3b	Ana
EG	-	AP1703AW	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23-3L	16vda	VD7	3b	Ana
EG	-	BCW66G	Si-npn	AF, 75V, 800mA, 330mW, B=160..400, 170MHz	SOT-23	16ta	-	3a	Ste
EG	-	SiP809CJEUEDT	Vdet-IC	4.0V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
EG	-	TS809RCXA	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Tsc
EG9	-	AP2121N-1.3TRE1	LVR-IC	LDO, 1.3V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
EGP	-	TPC20A	TVS	Vbr=19.0..21.0V, Vrwm=17.1V, Ipp=54.2A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
EGs	-	BCW66G	Si-npn	AF, 75V, 800mA, 330mW, B=160..400, 170MHz	SOT-23	16ta	-	3c	Inf
eH	-	BU46K244G	Vdet-IC	2.4V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Eh	-	BD49K48G	Vdet-IC	4.8V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
EH	-	1SS365	Si-diode	SBD, VHF/UHF-det/mix, 10V, 35mA, VF<0.42V(1mA), <0.85pF	CP	16dc	-	3a	San
EH	-	AP1703BTW	Vdet-IC	4.38V±1.5%, -Reset PPO	TSOT-23-3L	16vda	VD7	3b	Ana
EH	-	AP1703BW	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23-3L	16vda	VD7	3b	Ana
EH	-	BCW66H	Si-npn	AF, 75V, 800mA, 330mW, B=250..630, >100MHz	SOT-23	16ta	-	3a	Ste
EH	-	MMBZ4716	Z-diode	39V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
EH	-	SiP809CMEUEDT	Vdet-IC	4.38V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EH	-	TS809RCXB	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Tsc
EH1	-	AZ809ANSTR-E1	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Bcd
EH6	-	AZ809ANRTR-E1	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Bcd
EH7	-	AZ809ANLTR-E1	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Bcd
EHAA	-	MAX6326_R22-T	Vdet-IC	2.2V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
EHAA	-	MAX6326UR22	Vdet-IC	2.2V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
EHP	-	TPC22	TVS	Vbr=19.8..24.2V, Vrwm=17.8V, Ipp=47.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
EHs	-	BCW66H	Si-npn	AF, 75V, 800mA, 330mW, B=250..630, >170MHz	SOT-23	16ta	-	3c	Inf
EI	-	AP1703CTW	Vdet-IC	4.0V±1.5%, -Reset PPO	TSOT-23-3L	16vda	VD7	3b	Ana
EI	-	AP1703CW	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23-3L	16vda	VD7	3b	Ana
EI	-	SiP809CLEUEDT	Vdet-IC	4.63V±1.5%, -Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
EI	-	TS809RCXC	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Tsc
EI	-	UN211M	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=2k2/47k	SC-59	16ta	-	3a	Pan
EI	-	UN511M	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=2k2/47k	SOT-23	16ta	-	3a	Pan
EI	-	UNR211M	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=2k2/47k	SC-59	16ta	-	3a	Pan
EI	-	UNR511M	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=2k2/47k	SOT-323	16ta	-	3a	Pan
EI	-	UNR911MJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=2k2/47k	SS-MiniF	18ta	-	3a	Pan
EIAA	-	MAX6327UR22-T	Vdet-IC	2.2V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
EJ	-	AP1703DTW	Vdet-IC	3.08V±1.5%, -Reset PPO	TSOT-23-3L	16vda	VD7	3b	Ana
EJ	-	AP1703DW	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23-3L	16vda	VD7	3b	Ana
EJ	-	MMBZ4717	Z-diode	42V±5%, If=10mA, 350mW	SOT-23	16dc	-	3g	Vs
EJ	-	TS809RCXD	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Tsc
EJAA	-	MAX6328UR22-T	Vdet-IC	2.2V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
eK	-	BU46K254G	Vdet-IC	2.5V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Ek	-	BD49K49G	Vdet-IC	4.9V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
EK	-	AP1703ETW	Vdet-IC	2.93V±1.5%, -Reset PPO	TSOT-23-3L	16vda	VD7	3b	Ana
EK	-	AP1703EW	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23-3L	16vda	VD7	3b	Ana
EK	-	BCX41	Si-npn	AF, 125V, 800mA, 330mW, B>63, >100MHz	SOT-23	16ta	-	3a	Zx
EK	-	ELM7619LDB	Vdet-IC	1.9V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
EK	-	TS809RCXE	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Tsc
EK	-	UNR31AN	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=4k7/47k	SSSMini3	18ta	-	3a	Pan
EK0	-	CHDTB114EKPT	Si-pnp-Digi	Sw, 50V, 500mA, 200MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	Chm
EK1	-	CHDTA123EKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	Chm
EK2	-	CHDTA143EKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3a	Chm
EK3	-	CHDTA114EKPT	Si-pnp-Digi	Sw, 50V, 50mA, 250MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	Chm
EK4	-	CHDTA124EKPT	Si-pnp-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=22k/22k	SOT-23	16ta	-	3a	Chm
EK5	-	CHDTA144EKPT	Si-pnp-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/47k	SOT-23	16ta	-	3a	Chm
EK6	-	CHDTA115EKPT	Si-pnp-Digi	Sw, 50V, 20mA, 250MHz, R1/R2=100k/100k	SOT-23	16ta	-	3a	Chm
EK7	-	CHDTB113EKPT	Si-pnp-Digi	Sw, 50V, 500mA, 200MHz, R1/R2=1k/1k	SOT-23	16ta	-	3a	Chm
EK8	-	CHDTB123EKPT	Si-pnp-Digi	Sw, 50V, 500mA, 200MHz, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	Chm
EK9	-	CHDTB143EKPT	Si-pnp-Digi	Sw, 50V, 500mA, 200MHz, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3a	Chm
EKA	-	CHDTC123EKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	Chm
EKB	-	CHDTC143EKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/47k	SOT-23	16ta	-	3a	Chm
EKD	-	CHDTC124EKPT	Si-npn-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=22k/22k	SOT-23	16ta	-	3a	Chm
EKE	-	CHDTC144EKPT	Si-npn-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/47k	SOT-23	16ta	-	3a	Chm
EKF	-	CHDTC115EKPT	Si-npn-Digi	Sw, 50V, 20mA, 250MHz, R1/R2=100k/100k	SOT-23	16ta	-	3a	Chm
EKG	-	CHDTD113EKPT	Si-npn-Digi	Sw, 50V, 500mA, 200MHz, R1/R2=1k/1k	SOT-23	16ta	-	3a	Chm
EKH	-	CHDTD123EKPT	Si-npn-Digi	Sw, 50V, 500mA, 200MHz, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	Chm
EKI	-	CHDTD143EKPT	Si-npn-Digi	Sw, 50V, 500mA, 200MHz, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3a	Chm
EKJ	-	CHDTD114EKPT	Si-npn-Digi	Sw, 50V, 500mA, 200MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	Chm
EKK	-	CHDTC363EKPT	Si-npn-Digi	Sw, 20V, 600mA, 200MHz, R1/R2=6.8/6.8k	SOT-23	16ta	-	3a	Chm
EKL	-	CHDTC113ZKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=1k/10k	SOT-23	16ta	-	3a	Chm
EKM	-	CHDTC663EKPT	Si-npn-Digi	Sw, 20V, 600mA, 150MHz, R1/R2=6.8/6.8k	SOT-23	16ta	-	3a	Chm
EKP	-	TPC22A	TVS	Vbr=20.9..23.1V, Vrwm=18.8V, Ipp=49.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
EKs	-	BCX41	Si-npn	AF, 125V, 800mA, 330mW, B>63, 100MHz	SOT-23	16ta	-	3a	Sie
EL	-	2SA1344	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	CP	16ta	-	3a	San
EL	-	2SA1678	Si-pnp-Digi	Sw, 50V, 100mA, 200MHz, R1/R2=10k/10k	SOT-323	16ta	-	3a	San
EL	-	AP1703FTW	Vdet-IC	2.63V±1.5%, -Reset PPO	TSOT-23-3L	16vda	VD7	3b	Ana
EL	-	AP1703FW	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23-3L	16vda	VD7	3b	Ana
EL	-	SiP809CREUDT	Vdet-IC	2.63V±1.5%, -Reset PPO 210ms	SOT-23	16vdc	VD7	3g	Vs
EL	-	TS809RCXF	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Tsc
EL	-	UN221M	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=2k2/47k	SC-59	16ta	-	3a	Pan
EL	-	UN521M	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=2k2/47k	SOT-23	16ta	-	3a	Pan
EL	-	UNR221M	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=2k2/47k	SC-59	16ta	-	3a	Pan
EL	-	UNR521M	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=2k2/47k	SOT-323	16ta	-	3a	Pan
EL	-	UNR921MJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=2k2/47k	SS-MiniF	18ta	-	3a	Pan
ELP	-	TPC24	TVS	Vbr=21.6..26.4V, Vrwm=19.4V, Ipp=43.2A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
eM	-	BU46K264G	Vdet-IC	2.6V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Em	-	BD49K50G	Vdet-IC	5.0V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
EM	-	2SJ501	p-MOSFET	Sw, U-Speed, LogL, 20V, 500mA, 250mW, 10/30ns, <1Ω(50mA)	SOT-23	16fh	-	3a	San



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EM	-	AP1704DTW	Vdet-IC	3.08V±1.5%, +Reset PPO	TSOT-23-3L	16vda	VD7	3b	Ana
EM	-	AP1704DW	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23-3L	16vda	VD7	3b	Ana
EM	-	SiP809C27EUDT	Vdet-IC	2.7V±1.5%, -Reset PPO 210ms	SOT-23	16vdc	VD7	3g	Vs
EM	-	TS810RCXD	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Tsc
EMP	-	TPC24A	TVS	Vbr=22.8..25.2V, Vrwm=20.5V, Ipp=45.2A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
eN	-	BU46K274G	Vdet-IC	2.7V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
En	-	BD49K51G	Vdet-IC	5.1V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
EN	-	AP1704ETW	Vdet-IC	2.93V±1.5%, +Reset PPO	TSOT-23-3L	16vda	VD7	3b	Ana
EN	-	AP1704EW	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23-3L	16vda	VD7	3b	Ana
EN	-	SiP809CSEUDT	Vdet-IC	2.93V±1.5%, -Reset PPO 210ms	SOT-23	16vdc	VD7	3g	Vs
EN	-	TS810RCXE	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Tsc
EN	-	UNR31AT	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=22k/47k	SSSMini3	18ta	-	3a	Pan
EN3	-	2SC4860-3	Si-npn	UHF, Osc, 20V, 30mA, 20mW, B=60..120, 6.5GHz	MCP	16ta	-	3a	San
EN3	-	2SC4861-3	Si-npn	UHF, Osc, 20V, 30mA, 20mW, B=60..120, 6.5GHz	CP	16ta	-	3a	San
EN4	-	2SC4860-4	Si-npn	UHF, Osc, 20V, 30mA, 20mW, B=90..180, 6.5GHz	MCP	16ta	-	3a	San
EN4	-	2SC4861-4	Si-npn	UHF, Osc, 20V, 30mA, 20mW, B=90..180, 6.5GHz	CP	16ta	-	3a	San
EN5	-	2SC4860-5	Si-npn	UHF, Osc, 20V, 30mA, 20mW, B=130..270, 6.5GHz	MCP	16ta	-	3a	San
EN5	-	2SC4861-5	Si-npn	UHF, Osc, 20V, 30mA, 20mW, B=130..270, 6.5GHz	CP	16ta	-	3a	San
ENP	-	TPC27	TVS	Vbr=24.3..29.7V, Vrwm=21.8V, Ipp=38.4A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
EO	-	2SC3265-O	Si-npn	AF, Sw, 30V, 800mA, 200mW, B=100..200, 120MHz	SC-59	16ta	-	3a	Tos
EO	-	KTC3265-O	Si-npn	AF, 35V, 800mA, 200mW, B=100..200, 120MHz	SOT-23	16ta	-	3f	Kec
EO	-	SiP809CTEUDT	Vdet-IC	3.08V±1.5%, -Reset PPO 210ms	SOT-23	16vdc	VD7	3g	Vs
eP	-	BU46K284G	Vdet-IC	2.8V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Ep	-	BD49K52G	Vdet-IC	5.2V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
EP	-	AP1704FTW	Vdet-IC	2.63V±1.5%, +Reset PPO	TSOT-23-3L	16vda	VD7	3b	Ana
EP	-	AP1704FW	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23-3L	16vda	VD7	3b	Ana
EP	-	SiP809CJEUDT	Vdet-IC	4.0V±1.5%, -Reset PPO 210ms	SOT-23	16vdc	VD7	3g	Vs
EP	-	TS810RCXF	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Tsc
EP	-	UNR31AV	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=2k2/2k2	SSSMini3	18ta	-	3a	Pan
EPP	-	TPC27A	TVS	Vbr=25.7..28.4V, Vrwm=23.1V, Ipp=40.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
EQ	-	2SC5814-Q	Si-npn	AF-Amp, 60V, 125mA, 150mW, 200MHz, B=120..270	SC-59	16ta	-	3a	Ish
EQ	-	2SC5815-Q	Si-npn	AF-Amp, 60V, 125mA, 150mW, 200MHz, B=120..270	SOT-323	16ta	-	3a	Ish
EQ	-	2SC5816-Q	Si-npn	AF-Amp, 60V, 125mA, 125mW, 200MHz, B=120..270	SC-75A	16ta	-	3a	Ish
EQ	-	2SC5817-Q	Si-npn	AF-Amp, 60V, 125mA, 100mW, 200MHz, B=120..270	T-USM	18ta	-	3a	Ish
EQP	-	TPC30	TVS	Vbr=27.0..33.0V, Vrwm=24.3V, Ipp=34.5A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
eR	-	BU46K294G	Vdet-IC	2.9V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Er	-	BD49K53G	Vdet-IC	5.3V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
ER	-	2SC5814-R	Si-npn	AF-Amp, 60V, 125mA, 150mW, 200MHz, B=180..390	SC-59	16ta	-	3a	Ish
ER	-	2SC5815-R	Si-npn	AF-Amp, 60V, 125mA, 150mW, 200MHz, B=180..390	SOT-323	16ta	-	3a	Ish
ER	-	2SC5816-R	Si-npn	AF-Amp, 60V, 125mA, 125mW, 200MHz, B=180..390	SC-75A	16ta	-	3a	Ish
ER	-	2SC5817-R	Si-npn	AF-Amp, 60V, 125mA, 100mW, 200MHz, B=180..390	T-USM	18ta	-	3a	Ish
ER	-	SiP809CMEUDT	Vdet-IC	4.38V±1.5%, -Reset PPO 210ms	SOT-23	16vdc	VD7	3g	Vs
ERP	-	TPC30A	TVS	Vbr=28.5..31.5V, Vrwm=25.6V, Ipp=36.2A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
eS	-	BU46K304G	Vdet-IC	3.0V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
ES	-	2SC5814-S	Si-npn	AF-Amp, 60V, 125mA, 150mW, 200MHz, B=270..560	SC-59	16ta	-	3a	Ish
ES	-	2SC5815-S	Si-npn	AF-Amp, 60V, 125mA, 150mW, 200MHz, B=270..560	SOT-323	16ta	-	3a	Ish
ES	-	2SC5816-S	Si-npn	AF-Amp, 60V, 125mA, 125mW, 200MHz, B=270..560	SC-75A	16ta	-	3a	Ish
ES	-	2SC5817-S	Si-npn	AF-Amp, 60V, 125mA, 100mW, 200MHz, B=270..560	T-USM	18ta	-	3a	Ish
ES	-	SiP809CLEUDT	Vdet-IC	4.63V±1.5%, -Reset PPO 210ms	SOT-23	16vdc	VD7	3g	Vs
ES5	-	2SA1745-5	Si-pnp	AF, Lo-sat, 20V, 500mA, 150mW, B=135..270, 400MHz	SOT-323	16ta	-	3a	San
ES5	-	2SA1753-5	Si-pnp	AF-Amp, 20V, 500mA, 200mW, 300MHz, B=135..270	SOT-23	16ta	-	3a	San
ES6	-	2SA1745-6	Si-pnp	AF, Lo-sat, 20V, 500mA, 150mW, B=200..400, 400MHz	SOT-323	16ta	-	3a	San
ES6	-	2SA1753-6	Si-pnp	AF-Amp, 20V, 500mA, 200mW, 300MHz, B=200..400	SOT-23	16ta	-	3a	San
ES7	-	2SA1745-7	Si-pnp	AF, Lo-sat, 20V, 500mA, 150mW, B=300..600, 400MHz	SOT-323	16ta	-	3a	San
ES7	-	2SA1753-7	Si-pnp	AF-Amp, 20V, 500mA, 200mW, 300MHz, B=300..600	SOT-23	16ta	-	3a	San
ESP	-	TPC33	TVS	Vbr=29.7..36.3V, Vrwm=26.8V, Ipp=31.4A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
eT	-	BU46K314G	Vdet-IC	3.1V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
ET	-	BCW65RA	Si-npn	AF, 60V, 800mA, 330mW, B=100..250, >100MHz	SOT-23	16te	-	3a	Fer
ETP	-	TPC33A	TVS	Vbr=31.4..34.7V, Vrwm=28.2V, Ipp=32.8A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
EU	-	BCW65RB	Si-npn	AF, 60V, 800mA, 330mW, B=160..400, >100MHz	SOT-23	16te	-	3a	Fer
EU1	-	CHDTA123EUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/2.2k	SOT-323	16ta	-	3a	Chm
EU2	-	CHDTA143EUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3a	Chm
EU3	-	CHDTA114EUPT	Si-pnp-Digi	Sw, 50V, 50mA, 250MHz, R1/R2=10k/10k	SOT-323	16ta	-	3a	Chm
EU4	-	CHDTA124EUPT	Si-pnp-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=22k/22k	SOT-323	16ta	-	3a	Chm
EU5	-	CHDTA144EUPT	Si-pnp-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/47k	SOT-323	16ta	-	3a	Chm
EUA	-	CHDTC123EUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/2.2k	SOT-323	16ta	-	3a	Chm
EUD	-	CHDTC124EUPT	Si-npn-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=22k/22k	SOT-323	16ta	-	3a	Chm
EUF	-	CHDTC115EUPT	Si-npn-Digi	Sw, 50V, 20mA, 250MHz, R1/R2=100k/100k	SOT-323	16ta	-	3a	Chm
EUG	-	CHDTC363EUPT	Si-npn-Digi	Sw, 20V, 600mA, 200MHz, R1/R2=6.8/6.8k	SOT-323	16ta	-	3a	Chm
EUM	-	CHDTC663EUPT	Si-npn-Digi	Sw, 20V, 600mA, 150MHz, R1/R2=6.8/6.8k	SOT-323	16ta	-	3a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EUP	-	TPC36	TVS	Vbr=32.4..39.6V, Vrwm=29.1V, Ipp=28.8A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
EV	-	SiP810CREUADT	Vdet-IC	2.63V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
EV	-	UN2154	Si-pnp-Digi	Sw, 30V, 100mA, 200mW, 80MHz, R1/R2=10k/47k	SC-59	16ta	-	3a	Pan
EV	-	UN5154	Si-pnp-Digi	Sw, 30V, 100mA, 150mW, 80MHz, R1/R2=10k/47k	SOT-523F	18ta	-	3a	Pan
EV	-	UNR2154	Si-pnp-Digi	Sw, 30V, 100mA, 200mW, 80MHz, R1/R2=10k/47k	SC-59	16ta	-	3a	Pan
EV	-	UNR5154	Si-pnp-Digi	Sw, 30V, 100mA, 150mW, 80MHz, R1/R2=10k/47k	SOT-323	16ta	-	3a	Pan
EVP	-	TPC36A	TVS	Vbr=34.2..37.8V, Vrwm=30.8V, Ipp=30.1A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
eW	-	BU46K324G	Vdet-IC	3.2V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
EW	-	BCW65RC	Si-npn	AF, 60V, 800mA, 330mW, B=250..630, 170MHz	SOT-23	16te	-	3a	Fer
EW	-	SiP810C27EUADT	Vdet-IC	2.7V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
EW	-	UN211N	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=4k7/47k	SC-59	16ta	-	3a	Pan
EW	-	UN511N	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=4k7/47k	SOT-23	16ta	-	3a	Pan
EW	-	UNR211N	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=4k7/47k	SC-59	16ta	-	3a	Pan
EW	-	UNR511N	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=4k7/47k	SOT-323	16ta	-	3a	Pan
EW	-	UNR911NJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=4k7/47k	SS-MiniF	18ta	-	3a	Pan
EWAA	-	MAX6326_R23-T	Vdet-IC	2.3V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
EWAA	-	MAX6326UR23	Vdet-IC	2.3V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
EWP	-	TPC39	TVS	Vbr=35.1..42.9V, Vrwm=31.6V, Ipp=26.6A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
eX	-	BU46K334G	Vdet-IC	3.3V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
EX	-	BCW65FR	Si-npn	AF, 60V, 800mA, 330mW, B=100..250, >100MHz	SOT-23	16te	-	3a	Fer
EX	-	BCW66RF	Si-npn	AF, 75V, 800mA, 330mW, B=100..250, >100MHz	SOT-23	16te	-	3a	Fer
EX	-	SiP810CSEUADT	Vdet-IC	2.93V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
EX	-	UN221N	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=4k7/47k	SC-59	16ta	-	3a	Pan
EX	-	UN521N	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=4k7/47k	SOT-23	16ta	-	3a	Pan
EX	-	UNR221N	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=4k7/47k	SC-59	16ta	-	3a	Pan
EX	-	UNR321N	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 150MHz, R1/R2=4.7k/47k	SSSMini3	18ta	-	3a	Pan
EX	-	UNR521N	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=4k7/47k	SOT-323	16ta	-	3a	Pan
EX	-	UNR921NJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=4k7/47k	SS-MiniF	18ta	-	3a	Pan
EXAA	-	MAX6326_R24-T	Vdet-IC	2.4V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
EXAA	-	MAX6326UR24	Vdet-IC	2.4V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
EXP	-	TPC39A	TVS	Vbr=37.1..41.0V, Vrwm=33.3V, Ipp=27.8A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
eY	-	BU46K344G	Vdet-IC	3.4V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Ey	-	BD49K54G	Vdet-IC	5.4V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
EY	-	2SC3265-Y	Si-npn	AF, Sw, 30V, 800mA, 200mW, B=160..320, 120MHz	SC-59	16ta	-	3a	Tos
EY	-	2SC3398	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	CP	16ta	-	3a	San
EY	-	2SC4398	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=10k/10k	SOT-323	16ta	-	3a	San
EY	-	BCW65GR	Si-npn	AF, 60V, 800mA, 330mW, B=160..400, >100MHz	SOT-23	16te	-	3a	Fer
EY	-	BCW66RG	Si-npn	AF, 75V, 800mA, 330mW, B=160..400, 170MHz	SOT-23	16te	-	3a	Fer
EY	-	KTC3265-Y	Si-npn	AF, 35V, 800mA, 200mW, B=160..320, 120MHz	SOT-23	16ta	-	3f	Kec
EY	-	SiP810CTEUADT	Vdet-IC	3.08V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
EY	-	UN211T	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=22k/47k	SC-59	16ta	-	3a	Pan
EY	-	UN511T	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=22k/47k	SOT-23	16ta	-	3a	Pan
EY	-	UN911TJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=22k/47k	SS-MiniF	18ta	-	3a	Pan
EY	-	UNR211T	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=22k/47k	SC-59	16ta	-	3a	Pan
EY	-	UNR311T	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 80MHz, R1/R2=22k/47k	SSSMini3	18ta	-	3a	Pan
EY	-	UNR511T	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=22k/47k	SOT-323	16ta	-	3a	Pan
EY	-	UNR911TJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=22k/47k	SS-MiniF	18ta	-	3a	Pan
EYAA	-	MAX6326_R25-T	Vdet-IC	2.5V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
EYAA	-	MAX6326UR25	Vdet-IC	2.5V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
EYP	-	TPC43	TVS	Vbr=38.7..47.3V, Vrwm=34.8V, Ipp=24.2A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
EZ	-	BCW65HR	Si-npn	AF, 60V, 800mA, 330mW, B=250..630, 170MHz	SOT-23	16te	-	3a	Fer
EZ	-	BCW66RH	Si-npn	AF, 75V, 800mA, 330mW, B=160..400, 170MHz	SOT-23	16te	-	3a	Fer
EZ	-	SiP810CJEUADT	Vdet-IC	4.0V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
EZ	-	UN221T	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=22k/47k	SC-59	16ta	-	3a	Pan
EZ	-	UN521T	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=22k/47k	SOT-23	16ta	-	3a	Pan
EZ	-	UN921TJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=22k/47k	SS-MiniF	18ta	-	3a	Pan
EZ	-	UNR221T	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=22k/47k	SC-59	16ta	-	3a	Pan
EZ	-	UNR521T	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=22k/47k	SOT-323	16ta	-	3a	Pan
EZ	-	UNR921TJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=22k/47k	SS-MiniF	18ta	-	3a	Pan
EZAA	-	MAX6326_R26-T	Vdet-IC	2.6V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
EZAA	-	MAX6326UR26	Vdet-IC	2.6V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
EZP	-	TPC43A	TVS	Vbr=40.9..45.2V, Vrwm=36.8V, Ipp=25.3A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
f	-	AX6901FA	Vdet-IC	2.63V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Axl
F	-	SB01-15CP	Si-diode	SBR, HF, 150V, 100mA, Vf<0.75V(100mA), 7pF, 10ns	CP	16dc	-	3a	San
F	-	UNR211W	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R2=100k	SC-59	16ta	-	3a	Pan
F	cr	ELM7527NEB	Vdet-IC	2.7V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
F	cs	ELM7527CEB	Vdet-IC	2.7V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
F0	-	AP8821C-50GC	Vdet-IC	5.0V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
F0	-	AP8821C-50GT	Vdet-IC	5.0V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
F0	-	AP8821C-50PC	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F0	-	AP8821C-50PT	Vdet-IC	5.0V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
F0	-	BZX84C68	Z-diode	64..72V, Zzt=240Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
F0	-	ELM7620HBB	Vdet-IC	2.0V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
F0	-	ELM9750NBB	Vdet-IC	5.0V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
F0	-	HSMP-3820	PIN-diode	RF, Sw, 50V, 1A(1μs), <0.75pF, <0.6Ω(10mA), 3GHz	SOT-23	16dc	-	3a	Agi
F0	-	R3111N502A	Vdet-IC	5V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
F0	-	R3113D201C	Vdet-IC	2V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
F0	-	RT9808-16CV	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F0	-	TC54VC5002ECB	Vdet-IC	5.0V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
F0-	-	RT9808-16PV	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F01	-	KV1400-1	C-diode	Dual, FM tuner, 17V, 10nA, 69.13..71.23pF, Rs=0.3Ω	SOT-23	16dg	-	3a	Tok
F02	-	DTD123TK	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1=2k2	SOT-346	16ta	-	3a	Rhm
F02	-	KV1400-2	C-diode	Dual, FM tuner, 17V, 10nA, 71.8..73.24pF, Rs=0.3Ω	SOT-23	16dg	-	3a	Tok
F03	-	DTD143TK	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1=4k7	SOT-346	16ta	-	3a	Rhm
F03	-	KV1400-3	C-diode	Dual, FM tuner, 17V, 10nA, 73.09..75.30pF, Rs=0.3Ω	SOT-23	16dg	-	3a	Tok
F03	-	XC61CC5002M	Vdet-IC	5.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
F03	-	XE61CC5045MR	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
F04	-	KV1400-4	C-diode	Dual, FM tuner, 17V, 10nA, 75.15..77.43pF, Rs=0.3Ω	SOT-23	16dg	-	3a	Tok
F05	-	KV1400-5	C-diode	Dual, FM tuner, 17V, 10nA, 77.27..79.61pF, Rs=0.3Ω	SOT-23	16dg	-	3a	Tok
F05	-	LN61FC5012M	Vdet-IC	5.0V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
F05	-	XC61FC5012M	Vdet-IC	5.0V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
F05	-	XC61HC5012MR	Vdet-IC	5.0V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
F06	-	LN61FC5042M	Vdet-IC	5.0V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
F06	-	XC61FC5042M	Vdet-IC	5.0V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
F06	-	XC61HC5042MR	Vdet-IC	5.0V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
F07	-	LN61FC5052M	Vdet-IC	5.0V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
F07	-	XC61FC5052M	Vdet-IC	5.0V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
F07	-	XC61HC5052MR	Vdet-IC	5.0V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
F0C	-	KIC3201T-50	LVR-IC	LDO, 5.0V±2%, 400mA	TSM	16cg	VR1	3f	Kec
F1	-	AP8821C-51GC	Vdet-IC	5.1V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
F1	-	AP8821C-51GT	Vdet-IC	5.1V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
F1	-	AP8821C-51PC	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
F1	-	AP8821C-51PT	Vdet-IC	5.1V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
F1	-	ELM7621HBB	Vdet-IC	2.1V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
F1	-	ELM9751NBB	Vdet-IC	5.1V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
F1	-	KST1009-F1	Si-npn	GP, 50V, 50mA, 350mW, B=60..120, >150MHz	SOT-23	16ta	-	3a	Sam
F1	-	KTC1009F1	Si-npn	AF, 50V, 50mA, 350mW, B=30..60, >150MHz	SOT-23	16ta	-	3f	Sam
F1	-	MMBC1009F1	Si-npn	AM/FM-RF Amp, 50V, 50mA, 350mW, B=30..60, >150MHz	SOT-23	16ta	-	3a	Sam
F1	-	MMBZ5236B	Z-diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 350mW	SOT-23	16dc	-	3c	Pjt
F1	-	MMBZ5236BW	Z-diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 150mW	SOT-523	16dc	-	3a	Di
F1	-	MMBZ5236BW	Z-diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 200mW	SOT-323	16dc	-	3c	Pjt
F1	-	R3111N512A	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
F1	-	R3113D211C	Vdet-IC	2.1V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
F1	-	RT9808-19CV	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F1	-	TC54VC5102ECB	Vdet-IC	5.1V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
F11	-	DTB113EK	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=1k/1k	SOT-346	16ta	-	3a	Rhm
F12	-	2SC2223-12	Si-npn	HF, 30V, 20mA, 150mW, 600MHz, B=40..80	SOT-23	16ta	-	3a	Nec
F12	-	2SC4178-12	Si-npn	HF, 30V, 20mA, 150mW, B=40..80, >600MHz	SOT-323	16ta	-	3a	Nec
F12	-	DTB123EK	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=2k2/2k2	SOT-346	16ta	-	3a	Rhm
F13	-	2SC2223-13	Si-npn	HF, 30V, 20mA, 150mW, 600MHz, B=60..120	SOT-23	16ta	-	3a	Nec
F13	-	2SC4178-13	Si-npn	HF, 30V, 20mA, 150mW, B=60..120, >600MHz	SOT-323	16ta	-	3a	Nec
F13	-	DTB143EC	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=4k7/4k7	SST3	16ta	-	3a	Rhm
F13	-	DTB143EK	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=4k7/4k7	SOT-346	16ta	-	3a	Rhm
F13	-	XC61CC5102M	Vdet-IC	5.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
F13	-	XE61CC5145MR	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
F14	-	2SC2223-14	Si-npn	HF, 30V, 20mA, 150mW, 600MHz, B=90..180	SOT-23	16ta	-	3a	Nec
F14	-	2SC4178-14	Si-npn	HF, 30V, 20mA, 150mW, B=90..180, >600MHz	SOT-323	16ta	-	3a	Nec
F14	-	DTB114EK	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-346	16ta	-	3a	Rhm
F15	-	LN61FC5112M	Vdet-IC	5.1V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
F15	-	XC61FC5112M	Vdet-IC	5.1V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
F15	-	XC61HC5112MR	Vdet-IC	5.1V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
F16	-	LN61FC5142M	Vdet-IC	5.1V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
F16	-	XC61FC5142M	Vdet-IC	5.1V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
F16	-	XC61HC5142MR	Vdet-IC	5.1V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
F17	-	LN61FC5152M	Vdet-IC	5.1V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
F17	-	XC61FC5152M	Vdet-IC	5.1V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
F17	-	XC61HC5152MR	Vdet-IC	5.1V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
F1C	-	KIC3201T-51	LVR-IC	LDO, 5.1V±2%, 400mA	TSM	16cg	VR1	3f	Kec
F1O	-	KSA1182-O	Si-pnp	AF, 35V, 500mA, 150mW, B=70..140, >200MHz	SOT-23	16ta	-	3a	Sam
F1p	-	BFS18	Si-npn	RF, 30V, 30mA, 200MHz	SOT-23	16ta	-	3a	PhH

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F1t	-	BFS18	Si-npn	RF, 30V, 30mA, 200MHz	SOT-23	16ta	-	3a	PhM
F1W	-	BFS18	Si-npn	RF, 30V, 30mA, 200MHz	SOT-23	16ta	-	3a	PhC
F1Y	-	KSA1182-Y	Si-pnp	AF, 35V, 500mA, 150mW, B=120..240, >200MHz	SOT-23	16ta	-	3a	Sam
F2	-	2SC2814-2	Si-npn	AF-Amp, 30V, 30mA, 150mW, 320MHz, B=40..80	SOT-23	16ta	-	3a	San
F2	-	AP8821C-52GC	Vdet-IC	5.2V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
F2	-	AP8821C-52GT	Vdet-IC	5.2V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
F2	-	AP8821C-52PC	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
F2	-	AP8821C-52PT	Vdet-IC	5.2V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
F2	-	BFS19	Si-npn	RF, 30V, 30mA, 250mW, B=65..225, 260MHz	SOT-23	16ta	-	3a	Ste
F2	-	ELM7622HBB	Vdet-IC	2.2V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
F2	-	ELM9752NBB	Vdet-IC	5.2V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
F2	-	HSMP-3822	PIN-diode	Dual, RF, Sw, 50V, 1A(1µs), <0.75pF, <0.6Ω(10mA), 3GHz	SOT-23	16dl	-	3a	Agi
F2	-	KST1009-F2	Si-npn	GP, 50V, 50mA, 350mW, B=90..180, >150MHz	SOT-23	16ta	-	3a	Sam
F2	-	LBZX84B6V8L	Z-diode	6.65..6.93V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
F2	-	MMBC1009F2	Si-npn	AM/FM-RF Amp, 50V, 50mA, 350mW, B=40..80, >150MHz	SOT-23	16ta	-	3a	Sam
F2	-	MMBZ5237B	Z-diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 350mW	SOT-23	16dc	-	3c	Pjt
F2	-	MMBZ5237BW	Z-diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 150mW	SOT-523	16dc	-	3a	Di
F2	-	MMBZ5237BW	Z-diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOT-323	16dc	-	3c	Pjt
F2	-	R3111N522A	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
F2	-	R3113D221C	Vdet-IC	2.2V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
F2	-	RT9808-20CV	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F2	-	TC54VC5202ECB	Vdet-IC	5.2V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
F2-	-	RT9808-20PV	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F20	cm	XC6382B201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F21	-	DTD113EK	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=1k/1k	SOT-346	16ta	-	3a	Rhm
F21	cm	XC6382B211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F212G	-	UR6225G-12-AE3-3	LVR-IC	1.2V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F212L	-	UR6225L-12-AE3-3	LVR-IC	1.2V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F213G	-	UR6225G-13-AE3-3	LVR-IC	1.3V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F213L	-	UR6225L-13-AE3-3	LVR-IC	1.3V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F214G	-	UR6225G-14-AE3-3	LVR-IC	1.4V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F214L	-	UR6225L-14-AE3-3	LVR-IC	1.4V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F215G	-	UR6225G-15-AE3-3	LVR-IC	1.5V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F215L	-	UR6225L-15-AE3-3	LVR-IC	1.5V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F216G	-	UR6225G-16-AE3-3	LVR-IC	1.6V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F216L	-	UR6225L-16-AE3-3	LVR-IC	1.6V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F217G	-	UR6225G-17-AE3-3	LVR-IC	1.7V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F217L	-	UR6225L-17-AE3-3	LVR-IC	1.7V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F218G	-	UR6225G-18-AE3-3	LVR-IC	1.8V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F218L	-	UR6225L-18-AE3-3	LVR-IC	1.8V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F219G	-	UR6225G-19-AE3-3	LVR-IC	1.9V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F219L	-	UR6225L-19-AE3-3	LVR-IC	1.9V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F22	-	DTD123EK	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=2k2/2k2	SOT-346	16ta	-	3a	Rhm
F22	cm	XC6382B221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F220G	-	UR6225G-20-AE3-3	LVR-IC	2.0V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F220L	-	UR6225L-20-AE3-3	LVR-IC	2.0V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F221G	-	UR6225G-21-AE3-3	LVR-IC	2.1V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F221L	-	UR6225L-21-AE3-3	LVR-IC	2.1V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F222G	-	UR6225G-22-AE3-3	LVR-IC	2.2V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F222L	-	UR6225L-22-AE3-3	LVR-IC	2.2V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F223G	-	UR6225G-23-AE3-3	LVR-IC	2.3V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F223L	-	UR6225L-23-AE3-3	LVR-IC	2.3V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F224G	-	UR6225G-24-AE3-3	LVR-IC	2.4V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F224L	-	UR6225L-24-AE3-3	LVR-IC	2.4V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F225G	-	UR6225G-25-AE3-3	LVR-IC	2.5V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F225L	-	UR6225L-25-AE3-3	LVR-IC	2.5V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F226G	-	UR6225G-26-AE3-3	LVR-IC	2.6V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F226L	-	UR6225L-26-AE3-3	LVR-IC	2.6V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F227G	-	UR6225G-27-AE3-3	LVR-IC	2.7V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F227L	-	UR6225L-27-AE3-3	LVR-IC	2.7V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F228G	-	UR6225G-28-AE3-3	LVR-IC	2.8V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F228L	-	UR6225L-28-AE3-3	LVR-IC	2.8V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F229G	-	UR6225G-29-AE3-3	LVR-IC	2.9V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F229L	-	UR6225L-29-AE3-3	LVR-IC	2.9V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F23	-	DTD143EC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=4k7/4k7	SST3	16ta	-	3a	Rhm
F23	-	DTD143EK	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=4k7/4k7	SOT-346	16ta	-	3a	Rhm
F23	-	XC61CC5202M	Vdet-IC	5.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
F23	-	XE61CC5245MR	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
F23	cm	XC6382B231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F230G	-	UR6225G-30-AE3-3	LVR-IC	3.0V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F230L	-	UR6225L-30-AE3-3	LVR-IC	3.0V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F231G	-	UR6225G-31-AE3-3	LVR-IC	3.1V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F231L	-	UR6225L-31-AE3-3	LVR-IC	3.1V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F232G	-	UR6225G-32-AE3-3	LVR-IC	3.2V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F232L	-	UR6225L-32-AE3-3	LVR-IC	3.2V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F233G	-	UR6225G-33-AE3-3	LVR-IC	3.3V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F233L	-	UR6225L-33-AE3-3	LVR-IC	3.3V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F234G	-	UR6225G-34-AE3-3	LVR-IC	3.4V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F234L	-	UR6225L-34-AE3-3	LVR-IC	3.4V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F235G	-	UR6225G-35-AE3-3	LVR-IC	3.5V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F235L	-	UR6225L-35-AE3-3	LVR-IC	3.5V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F236G	-	UR6225G-36-AE3-3	LVR-IC	3.6V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F236L	-	UR6225L-36-AE3-3	LVR-IC	3.6V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F237G	-	UR6225G-37-AE3-3	LVR-IC	3.7V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F237L	-	UR6225L-37-AE3-3	LVR-IC	3.7V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F238G	-	UR6225G-38-AE3-3	LVR-IC	3.8V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F238L	-	UR6225L-38-AE3-3	LVR-IC	3.8V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F239G	-	UR6225G-39-AE3-3	LVR-IC	3.9V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F239L	-	UR6225L-39-AE3-3	LVR-IC	3.9V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F24	-	DTD114EK	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-346	16ta	-	3a	Rhm
F24	cm	XC6382B241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F240G	-	UR6225G-40-AE3-3	LVR-IC	4.0V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F240L	-	UR6225L-40-AE3-3	LVR-IC	4.0V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F241G	-	UR6225G-41-AE3-3	LVR-IC	4.1V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F241L	-	UR6225L-41-AE3-3	LVR-IC	4.1V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F242G	-	UR6225G-42-AE3-3	LVR-IC	4.2V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F242L	-	UR6225L-42-AE3-3	LVR-IC	4.2V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F243G	-	UR6225G-43-AE3-3	LVR-IC	4.3V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F243L	-	UR6225L-43-AE3-3	LVR-IC	4.3V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F244G	-	UR6225G-44-AE3-3	LVR-IC	4.4V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F244L	-	UR6225L-44-AE3-3	LVR-IC	4.4V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F245G	-	UR6225G-45-AE3-3	LVR-IC	4.5V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F245L	-	UR6225L-45-AE3-3	LVR-IC	4.5V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F246G	-	UR6225G-46-AE3-3	LVR-IC	4.6V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F246L	-	UR6225L-46-AE3-3	LVR-IC	4.6V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F247G	-	UR6225G-47-AE3-3	LVR-IC	4.7V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F247L	-	UR6225L-47-AE3-3	LVR-IC	4.7V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F248G	-	UR6225G-48-AE3-3	LVR-IC	4.8V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F248L	-	UR6225L-48-AE3-3	LVR-IC	4.8V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F249G	-	UR6225G-49-AE3-3	LVR-IC	4.9V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F249L	-	UR6225L-49-AE3-3	LVR-IC	4.9V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F25	-	LN61FC5212M	Vdet-IC	5.2V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
F25	-	XC61FC5212M	Vdet-IC	5.2V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
F25	-	XC61HC5212MR	Vdet-IC	5.2V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
F25	cm	XC6382B251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F250G	-	UR6225G-50-AE3-3	LVR-IC	5.0V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F250L	-	UR6225L-50-AE3-3	LVR-IC	5.0V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F251G	-	UR6225G-51-AE3-3	LVR-IC	5.1V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F251L	-	UR6225L-51-AE3-3	LVR-IC	5.1V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F252G	-	UR6225G-52-AE3-3	LVR-IC	5.2V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F252L	-	UR6225L-52-AE3-3	LVR-IC	5.2V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F253G	-	UR6225G-53-AE3-3	LVR-IC	5.3V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F253L	-	UR6225L-53-AE3-3	LVR-IC	5.3V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F254G	-	UR6225G-54-AE3-3	LVR-IC	5.4V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F254L	-	UR6225L-54-AE3-3	LVR-IC	5.4V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F255G	-	UR6225G-55-AE3-3	LVR-IC	5.5V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F255L	-	UR6225L-55-AE3-3	LVR-IC	5.5V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F256G	-	UR6225G-56-AE3-3	LVR-IC	5.6V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F256L	-	UR6225L-56-AE3-3	LVR-IC	5.6V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F257G	-	UR6225G-57-AE3-3	LVR-IC	5.7V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F257L	-	UR6225L-57-AE3-3	LVR-IC	5.7V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F258G	-	UR6225G-58-AE3-3	LVR-IC	5.8V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F258L	-	UR6225L-58-AE3-3	LVR-IC	5.8V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F259G	-	UR6225G-59-AE3-3	LVR-IC	5.9V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F259L	-	UR6225L-59-AE3-3	LVR-IC	5.9V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F26	-	LN61FC5242M	Vdet-IC	5.2V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
F26	-	XC61FC5242M	Vdet-IC	5.2V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
F26	-	XC61HC5242MR	Vdet-IC	5.2V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
F26	cm	XC6382B261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F260G	-	UR6225G-60-AE3-3	LVR-IC	6.0V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F260L	-	UR6225L-60-AE3-3	LVR-IC	6.0V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F27	-	LN61FC5252M	Vdet-IC	5.2V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
F27	-	XC61FC5252M	Vdet-IC	5.2V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
F27	-	XC61HC5252MR	Vdet-IC	5.2V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
F27	cm	XC6382B271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F28	cm	XC6382B281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F29	cm	XC6382B291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F2C	-	KIC3201T-52	LVR-IC	LDO, 5.2V±2%, 400mA	TSM	16cg	VR1	3f	Kec
F2JG	-	UR6225G-285-AE3-3	LVR-IC	2.85V±2%, 100mA, halogen free	SOT-23	16cg	VR1	3a	Utc
F2JL	-	UR6225L-285-AE3-3	LVR-IC	2.85V±2%, 100mA, lead free	SOT-23	16cg	VR1	3a	Utc
F2p	-	BFS19	Si-npn	RF, 30V, 30mA, 250mW, B=65..225, 260MHz	SOT-23	16ta	-	3a	PhH
F2t	-	BFS19	Si-npn	RF, 30V, 30mA, 250mW, B=65..225, 260MHz	SOT-23	16ta	-	3a	PhM
F2W	-	BFS19	Si-npn	RF, 30V, 30mA, 250mW, B=65..225, 260MHz	SOT-23	16ta	-	3a	PhC
F3	-	1SS193	Si-diode	Sw, U-Fast, 85V, 100mA, 150mW, Vf<1.2V(100mA), <4ns	SC-59	16dc	-	3a	Tos
F3	-	2SC2814-3	Si-npn	AF-Amp, 30V, 30mA, 150mW, 320MHz, B=60..120	SOT-23	16ta	-	3a	San
F3	-	2SC4399-3	Si-npn	AF, 30V, 30mA, 150mW, B=60..120, 320MHz	SOT-323	16ta	-	3a	San
F3	-	AP8821C-53GC	Vdet-IC	5.3V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
F3	-	AP8821C-53GT	Vdet-IC	5.3V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
F3	-	AP8821C-53PC	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
F3	-	AP8821C-53PT	Vdet-IC	5.3V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
F3	-	ELM7623HBB	Vdet-IC	2.3V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
F3	-	ELM9753NBB	Vdet-IC	5.3V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
F3	-	HSMP-3823	PIN-diode	Dual, RF, Sw, 50V, 1A(1µs), <0.75pF, <0.6Ω(10mA), 3GHz	SOT-23	16df	-	3a	Agi
F3	-	KST1009-F3	Si-npn	GP, 50V, 50mA, 350mW, B=135..270, >150MHz	SOT-23	16ta	-	3a	Sam
F3	-	MMBC1009F3	Si-npn	AM/FM-RF Amp, 50V, 50mA, 350mW, B=50..130, >150MHz	SOT-23	16ta	-	3a	Sam
F3	-	MMBZ5238B	Z-diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 350mW	SOT-23	16dc	-	3c	Pjt
F3	-	MMBZ5238BW	Z-diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 150mW	SOT-523	16dc	-	3a	Di
F3	-	MMBZ5238BW	Z-diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOT-323	16dc	-	3c	Pjt
F3	-	R3111N532A	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
F3	-	R3113D231C	Vdet-IC	2.3V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
F3	-	RT9808-21CV	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F3	-	TC54VC5302ECB	Vdet-IC	5.3V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
F3-	-	RT9808-21PV	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F30	cm	XC6382B301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F31	cm	XC6382B311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F32	cm	XC6382B321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F33	-	XC61CC5302M	Vdet-IC	5.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
F33	-	XE61CC5345MR	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
F33	cm	XC6382B331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F34	cm	XC6382B341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F35	-	LN61FC5312M	Vdet-IC	5.3V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
F35	-	XC61FC5312M	Vdet-IC	5.3V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
F35	-	XC61HC5312MR	Vdet-IC	5.3V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
F35	cm	XC6382B351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F36	-	LN61FC5342M	Vdet-IC	5.3V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
F36	-	XC61FC5342M	Vdet-IC	5.3V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
F36	-	XC61HC5342MR	Vdet-IC	5.3V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
F36	cm	XC6382B361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F37	-	LN61FC5352M	Vdet-IC	5.3V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
F37	-	XC61FC5352M	Vdet-IC	5.3V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
F37	-	XC61HC5352MR	Vdet-IC	5.3V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
F37	cm	XC6382B371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F38	cm	XC6382B381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F39	cm	XC6382B391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F3C	-	KIC3201T-53	LVR-IC	LDO, 5.3V±2%, 400mA	TSM	16cg	VR1	3f	Kec
F3T	-	1PS193	Si-diode	Sw, Fast, 80V, 215mA, <4ns	SC-59	16dc	-	3a	Phi
F4	-	2SC2814-4	Si-npn	AF-Amp, 30V, 30mA, 150mW, 320MHz, B=90..180	SOT-23	16ta	-	3a	San
F4	-	2SC4399-4	Si-npn	AF, 30V, 30mA, 150mW, B=90..180, 320MHz	SOT-323	16ta	-	3a	San
F4	-	AP8821C-54GC	Vdet-IC	5.4V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
F4	-	AP8821C-54GT	Vdet-IC	5.4V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
F4	-	AP8821C-54PC	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
F4	-	AP8821C-54PT	Vdet-IC	5.4V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
F4	-	BFS18R	Si-npn	RF, 30V, 30mA, 200MHz	SOT-23	16ta	-	3a	Ste
F4	-	ELM7624HBB	Vdet-IC	2.4V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
F4	-	ELM9754NBB	Vdet-IC	5.4V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
F4	-	HSMP-3824	PIN-diode	Dual, RF, Sw, 50V, 1A(1µs), <0.75pF, <0.6Ω(10mA), 3GHz	SOT-23	16dg	-	3a	Agi
F4	-	KA4L3Z	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=4k7	SOT-416	16ta	-	3a	Nec
F4	-	KST1009-F4	Si-npn	GP, 50V, 50mA, 350mW, B=200..400, >150MHz	SOT-23	16ta	-	3a	Sam
F4	-	KTA2013F-4	Si-pnp	AF, Sw, 20V, 150mA, 50mW, B=120..240, >80MHz	TFSM	19ta	-	3f	Kec
F4	-	MMBC1009F4	Si-npn	AM/FM-RF Amp, 50V, 50mA, 350mW, B=100..200, >150MHz	SOT-23	16ta	-	3a	Sam

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F4	-	MMBZ5239B	Z-diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 350mW	SOT-23	16dc	-	3c	Pjt
F4	-	MMBZ5239BW	Z-diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 150mW	SOT-523	16dc	-	3a	Di
F4	-	MMBZ5239BW	Z-diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 200mW	SOT-323	16dc	-	3c	Pjt
F4	-	R3111N542A	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
F4	-	R3113D241C	Vdet-IC	2.4V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
F4	-	RT9808-27CV	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F4	-	TC54VC5402ECB	Vdet-IC	5.4V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
F4-	-	RT9808-27PV	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F40	cm	XC6382B401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F41	cm	XC6382B411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F42	cm	XC6382B421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F43	-	XC61CC5402M	Vdet-IC	5.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
F43	-	XE61CC5445MR	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
F43	cm	XC6382B431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F44	cm	XC6382B441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F45	-	LN61FC5412M	Vdet-IC	5.4V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
F45	-	XC61FC5412M	Vdet-IC	5.4V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
F45	-	XC61HC5412MR	Vdet-IC	5.4V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
F45	cm	XC6382B451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F46	-	LN61FC5442M	Vdet-IC	5.4V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
F46	-	XC61FC5442M	Vdet-IC	5.4V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
F46	-	XC61HC5442MR	Vdet-IC	5.4V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
F46	cm	XC6382B461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F47	-	LN61FC5452M	Vdet-IC	5.4V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
F47	-	XC61FC5452M	Vdet-IC	5.4V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
F47	-	XC61HC5452MR	Vdet-IC	5.4V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
F47	cm	XC6382B471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F48	cm	XC6382B481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F49	cm	XC6382B491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F4C	-	KIC3201T-54	LVR-IC	LDO, 5.4V±2%, 400mA	TSM	16cg	VR1	3f	Kec
F5	-	1SS250	Si-diode	Rectifer, 250V, 100mA, <60ns	SOT-23	16dr	-	3a	Tos
F5	-	1SS370	Si-diode	Rectifier, 200V, 100mA, VF<1.2V(100mA), <60ns	SOT-323	16dc	-	3a	Tos
F5	-	2SC2814-5	Si-npn	AF-Amp, 30V, 30mA, 150mW, 320MHz, B=135..270	SOT-23	16ta	-	3a	San
F5	-	2SC4399-5	Si-npn	AF, 30V, 30mA, 150mW, B=135..270, 320MHz	SOT-323	16ta	-	3a	San
F5	-	AP8821C-55GC	Vdet-IC	5.5V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
F5	-	AP8821C-55GT	Vdet-IC	5.5V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
F5	-	AP8821C-55PC	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
F5	-	AP8821C-55PT	Vdet-IC	5.5V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
F5	-	BFS19R	Si-npn	RF, 30V, 30mA, 250mW, B=65..225, 260MHz	SOT-23	16ta	-	3a	Sil
F5	-	ELM7625HBB	Vdet-IC	2.5V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
F5	-	ELM9755NBB	Vdet-IC	5.5V±2.5%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
F5	-	KST1009-F5	Si-npn	GP, 50V, 50mA, 350mW, B=300..600, >150MHz	SOT-23	16ta	-	3a	Sam
F5	-	MMBC1009F5	Si-npn	AM/FM-RF Amp, 50V, 50mA, 350mW, B=135..270, >150MHz	SOT-23	16ta	-	3a	Sam
F5	-	MMBZ5240B	Z-diode	10V±5%, Izt=20mA, Zzt=17Ω, 350mW	SOT-23	16dc	-	3c	Pjt
F5	-	MMBZ5240BW	Z-diode	10V±5%, Izt=20mA, Zzt=17Ω, 150mW	SOT-523	16dc	-	3a	Di
F5	-	MMBZ5240BW	Z-diode	10V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOT-323	16dc	-	3c	Pjt
F5	-	R3111N552A	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
F5	-	R3113D251C	Vdet-IC	2.5V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
F5	-	RT9808-29CV	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F5	-	SP810EK-2-9	Vdet-IC	2.9V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Sip
F5	-	TC54VC5502ECB	Vdet-IC	5.5V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
F50	cm	XC6382B501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F51	cm	XC6382B511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F52	-	DTB123YC	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=2k2/10k	SST3	16ta	-	3a	Rhm
F52	-	DTB123YK	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=2k2/10k	SOT-346	16ta	-	3a	Rhm
F52	cm	XC6382B521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F53	-	XC61CC5502M	Vdet-IC	5.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
F53	-	XE61CC5545MR	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
F53	cm	XC6382B531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F54	cm	XC6382B541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F55	-	LN61FC5512M	Vdet-IC	5.5V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
F55	-	XC61FC5512M	Vdet-IC	5.5V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
F55	-	XC61HC5512MR	Vdet-IC	5.5V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
F55	cm	XC6382B551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F56	-	LN61FC5542M	Vdet-IC	5.5V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
F56	-	XC61FC5542M	Vdet-IC	5.5V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
F56	-	XC61HC5542MR	Vdet-IC	5.5V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
F56	cm	XC6382B561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F57	-	LN61FC5552M	Vdet-IC	5.5V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
F57	-	XC61FC5552M	Vdet-IC	5.5V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F57	-	XC61HC5552MR	Vdet-IC	5.5V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
F57	cm	XC6382B571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F58	cm	XC6382B581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F59	cm	XC6382B591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F5C	-	KIC3201T-55	LVR-IC	LDO, 5.5V±2%, 400mA	TSM	16cg	VR1	3f	Kec
F6	-	AP8821C-56GC	Vdet-IC	5.6V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
F6	-	AP8821C-56GT	Vdet-IC	5.6V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
F6	-	AP8821C-56PC	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
F6	-	AP8821C-56PT	Vdet-IC	5.6V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
F6	-	ELM7626HBB	Vdet-IC	2.6V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
F6	-	KTA2013F-6	Si-pnp	AF, Sw, 20V, 150mA, 50mW, B=200..400, >80MHz	TFSM	19ta	-	3f	Kec
F6	-	R3111N562A	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
F6	-	R3113D261C	Vdet-IC	2.6V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
F6	-	R3130N16EA	Vdet-IC	1.6V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
F6	-	RT9808-30CV	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F6	-	TC54VC5602ECB	Vdet-IC	5.6V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
F6-	-	RT9808-30PV	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F60	cm	XC6382B601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F61	cm	XC6382B611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F62	-	DTD123YK	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=2k2/10k	SOT-346	16ta	-	3a	Rhm
F62	cm	XC6382B621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F63	-	XC61CC5602M	Vdet-IC	5.6V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
F63	-	XE61CC5645MR	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
F63	cm	XC6382B631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F64	cm	XC6382B641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F65	-	LN61FC5612M	Vdet-IC	5.6V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
F65	-	XC61FC5612M	Vdet-IC	5.6V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
F65	-	XC61HC5612MR	Vdet-IC	5.6V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
F65	cm	XC6382B651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F66	-	LN61FC5642M	Vdet-IC	5.6V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
F66	-	XC61FC5642M	Vdet-IC	5.6V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
F66	-	XC61HC5642MR	Vdet-IC	5.6V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
F66	cm	XC6382B661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F67	-	LN61FC5652M	Vdet-IC	5.6V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
F67	-	XC61FC5652M	Vdet-IC	5.6V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
F67	-	XC61HC5652MR	Vdet-IC	5.6V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
F67	cm	XC6382B671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F68	cm	XC6382B681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F69	cm	XC6382B691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F6C	-	KIC3201T-56	LVR-IC	LDO, 5.6V±2%, 400mA	TSM	16cg	VR1	3f	Kec
F7	-	AP8821C-57GC	Vdet-IC	5.7V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
F7	-	AP8821C-57GT	Vdet-IC	5.7V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
F7	-	AP8821C-57PC	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
F7	-	AP8821C-57PT	Vdet-IC	5.7V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
F7	-	BAV99RW	Si-diode	Dual, Ultra-Speed, 70V, 215mA, Vf<1.2V(100mA), 0.5pF, 4ns	SOT-323	16ea	-	3a	Ons
F7	-	ELM7627HBB	Vdet-IC	2.7V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
F7	-	KN4L3Z	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1=4k7	SOT-416	16ta	-	3a	Nec
F7	-	R3111N572A	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
F7	-	R3113D271C	Vdet-IC	2.7V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
F7	-	R3130N17EA	Vdet-IC	1.7V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
F7	-	RT9808-33CV	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F7	-	TC54VC5702ECB	Vdet-IC	5.7V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
F7-	-	RT9808-33PV	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F70	cm	XC6382B701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
F73	-	XC61CC5702M	Vdet-IC	5.7V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
F73	-	XE61CC5745MR	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
F75	-	LN61FC5712M	Vdet-IC	5.7V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
F75	-	XC61FC5712M	Vdet-IC	5.7V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
F75	-	XC61HC5712MR	Vdet-IC	5.7V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
F76	-	LN61FC5742M	Vdet-IC	5.7V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
F76	-	XC61FC5742M	Vdet-IC	5.7V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
F76	-	XC61HC5742MR	Vdet-IC	5.7V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
F77	-	LN61FC5752M	Vdet-IC	5.7V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
F77	-	XC61FC5752M	Vdet-IC	5.7V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
F77	-	XC61HC5752MR	Vdet-IC	5.7V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
F7C	-	KIC3201T-57	LVR-IC	LDO, 5.7V±2%, 400mA	TSM	16cg	VR1	3f	Kec
F8	-	AP8821C-58GC	Vdet-IC	5.8V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
F8	-	AP8821C-58GT	Vdet-IC	5.8V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
F8	-	AP8821C-58PC	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
F8	-	AP8821C-58PT	Vdet-IC	5.8V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F8	-	BZX84C3V3	Z-diode	3.1..3.5V, Zzt=95Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
F8	-	ELM7628HBB	Vdet-IC	2.8V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
F8	-	R3111N582A	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
F8	-	R3113D281C	Vdet-IC	2.8V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
F8	-	R3130N18EA	Vdet-IC	1.8V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
F8	-	RT9808-35CV	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F8	-	TC54VC5802ECB	Vdet-IC	5.8V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
F83	-	XC61CC5802M	Vdet-IC	5.8V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
F83	-	XE61CC5845MR	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
F85	-	LN61FC5812M	Vdet-IC	5.8V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
F85	-	XC61FC5812M	Vdet-IC	5.8V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
F85	-	XC61HC5812MR	Vdet-IC	5.8V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
F86	-	LN61FC5842M	Vdet-IC	5.8V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
F86	-	XC61FC5842M	Vdet-IC	5.8V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
F86	-	XC61HC5842MR	Vdet-IC	5.8V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
F87	-	LN61FC5852M	Vdet-IC	5.8V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
F87	-	XC61FC5852M	Vdet-IC	5.8V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
F87	-	XC61HC5852MR	Vdet-IC	5.8V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
F8C	-	KIC3201T-58	LVR-IC	LDO, 5.8V±2%, 400mA	TSM	16cg	VR1	3f	Kec
F8p	-	BF824	Si-pnp	FM RF, 30V, 25mA, 250mW, B>25, 450MHz	SOT-23	16ta	-	3a	PhH
F8p	-	BF824W	Si-pnp	FM RF, 30V, 25mA, 200mW, B>25, 450MHz	SOT-323	16ta	-	3a	PhH
F8p	-	BF828	Si-pnp	AF, 30V, 25mA, 250mW, 450MHz	SOT-23	16ta	-	3a	Phi
F8t	-	BF824	Si-pnp	FM RF, 30V, 25mA, 250mW, B>25, 450MHz	SOT-23	16ta	-	3a	PhM
F8t	-	BF824W	Si-pnp	FM RF, 30V, 25mA, 200mW, B>25, 450MHz	SOT-323	16ta	-	3a	PhM
F8W	-	BF824	Si-pnp	FM RF, 30V, 25mA, 250mW, B>25, 450MHz	SOT-23	16ta	-	3a	PhC
F8W	-	BF824W	Si-pnp	FM RF, 30V, 25mA, 200mW, B>25, 450MHz	SOT-323	16ta	-	3a	PhC
F9	-	1SS321	Si-diode	Dual, Schottky, 2x10V, 50mA	SC-59	16dg	-	3a	Tos
F9	-	2SA1774	Si-pnp	AF, 60V, 150mA, 150mW, B=120..560, 140MHz	SC-75	16ta	-	3b	Ons
F9	-	AP8821C-59GC	Vdet-IC	5.9V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
F9	-	AP8821C-59GT	Vdet-IC	5.9V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
F9	-	AP8821C-59PC	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
F9	-	AP8821C-59PT	Vdet-IC	5.9V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
F9	-	BZX84C15	Z-diode	13.8..15.6V, Zzt=30Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
F9	-	ELM7629HBB	Vdet-IC	2.9V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
F9	-	R3111N592A	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
F9	-	R3113D291C	Vdet-IC	2.9V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
F9	-	R3130N19EA	Vdet-IC	1.9V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
F9	-	RT9808-42CV	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F9	-	TC54VC5901ECB	Vdet-IC	5.9V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
F9-	-	RT9808-42PV	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
F92	-	DTB123TK	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1=2k2	SOT-346	16ta	-	3a	Rhm
F93	-	DTB143TK	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1=4k7	SOT-346	16ta	-	3a	Rhm
F93	-	XC61CC5902M	Vdet-IC	5.9V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
F93	-	XE61CC5945MR	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
F95	-	LN61FC5912M	Vdet-IC	5.9V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
F95	-	XC61FC5912M	Vdet-IC	5.9V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
F95	-	XC61HC5912MR	Vdet-IC	5.9V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
F96	-	LN61FC5942M	Vdet-IC	5.9V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
F96	-	XC61FC5942M	Vdet-IC	5.9V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
F96	-	XC61HC5942MR	Vdet-IC	5.9V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
F97	-	LN61FC5952M	Vdet-IC	5.9V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
F97	-	XC61FC5952M	Vdet-IC	5.9V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
F97	-	XC61HC5952MR	Vdet-IC	5.9V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
F9C	-	KIC3201T-59	LVR-IC	LDO, 5.9V±2%, 400mA	TSM	16cg	VR1	3f	Kec
fA	-	BU46K354G	Vdet-IC	3.5V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Fa	-	BD49K55G	Vdet-IC	5.5V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
FA	-	2SC2619-A	Si-npn	AF, 100mA, 150mW, B=35..70, 230MHz	SOT-23	16ta	-	3a	Ren
FA	-	2SC4921	Si-npn-Digi	Mute, Drv, 25V, 100mA, 150mW, 240MHz, R1/R2=10k/10k	SMCP	16ta	-	3a	San
FA	-	2SC5233-A	Si-npn	Sw, Muting, 15V, 500mA, 100mW, 130MHz, B=300..600	SOT-323	16ta	-	3a	Tos
FA	-	2SC5376-A	Si-npn	Sw, Muting, 15V, 400mA, 100mW, 130MHz, B=300..600	SOT-416	16ta	-	3a	Tos
FA	-	2SC5376F-A	Si-npn	Sw, Muting, 15V, 400mA, 100mW, 130MHz, B=300..600	SOT-490	18ta	-	3a	Tos
FA	-	2SC5376FV-A	Si-npn	Sw, Muting, 15V, 400mA, 150mW, 130MHz, B=300..600	SOT-723	18ta	-	3a	Tos
FA	-	ELM7620LDB	Vdet-IC	2.0V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
FA	-	HSMP-4820	PIN-diode	Dual, RF, Sw, 50V, 1A(1μs), <0.75pF, <0.6Ω(10mA), 3GHz	SOT-323	16df	-	3a	Agi
FA	-	HSMP-482B	PIN-diode	Dual, RF, Sw, 50V, 1A(1μs), <0.75pF, <0.6Ω(10mA), 3GHz	SOT-323	16df	-	3a	Agi
FA	-	KRC151F	Si-npn-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1/R2=4.7k/4.7k	TFSM	19ta	-	3k	Kec
FA	-	RT9808-44CV	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FA	-	SiP810CMEUADT	Vdet-IC	4.38V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
FA	-	TC1277-5ENB	Vdet-IC	3.06V±2%, +Reset PPO	SOT-23	16vda	VD7	3d	Mcc
FA3	-	2SC1009A-3	Si-npn	FM/AM RF, 50V, 50mA, 150mW, 250MHz, B=60..120	SOT-23	16ta	-	3a	Nec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FA3	-	2SC4179-3	Si-npn	UHF, FM/AM, 50V, 50mA, 150mW, B=60..120, >150MHz	SOT-323	16ta	-	3a	Nec
FA4	-	2SC1009A-4	Si-npn	FM/AM RF, 50V, 50mA, 150mW, 250MHz, B=90..180	SOT-23	16ta	-	3a	Nec
FA4	-	2SC4179-4	Si-npn	UHF, FM/AM, 50V, 50mA, 150mW, B=90..180, >150MHz	SOT-323	16ta	-	3a	Nec
FAAA	-	MAX6326_R27-T	Vdet-IC	2.7V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FAAA	-	MAX6326UR27	Vdet-IC	2.7V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FAO	-	2SC5344SF-O	Si-npn	AF, 35V, 800mA, 200mW, 120MHz, B=100..200	SOT-23F	18ta	-	3a	Auk
FAO	-	2SC5344S-O	Si-npn	AF, 35V, 800mA, 200mW, 120MHz, B=100..200	SOT-23	16ta	-	3a	Auk
FAY	-	2SC5344SF-Y	Si-npn	AF, 35V, 800mA, 200mW, 120MHz, B=160..320	SOT-23F	18ta	-	3a	Auk
FAY	-	2SC5344S-Y	Si-npn	AF, 35V, 800mA, 200mW, 120MHz, B=160..320	SOT-23	16ta	-	3a	Auk
fB	-	BU46K364G	Vdet-IC	3.6V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Fb	-	BD49K56G	Vdet-IC	5.6V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
FB	-	2SC2619-B	Si-npn	AF, 100mA, 150mW, B=60..120, 230MHz	SOT-23	16ta	-	3a	Ren
FB	-	2SC3053-B	Si-npn	GP, AM/FM, 30V, 30mA, 150mW, B=35..70, 200MHz	SC-59	16ta	-	3a	Mit
FB	-	2SC4258-B	Si-npn	HF, AM/FM, 30V, 30mA, 150mW, 200MHz, B=35..70	SOT-323	16ta	-	3a	Mit
FB	-	2SC5016	Si-npn	VHF-Mix, 15V, 50mA, 1.3GHz	SOT-23	16te	-	3a	Pan
FB	-	2SC5216	Si-npn	VHF/UHF, 15V, 50mA, 200mW, 1.3GHz, B=100..350	SC-59	16ta	-	3a	Pan
FB	-	2SC5233-B	Si-npn	Sw, Muting, 15V, 500mA, 100mW, 130MHz, B=500..1000	SOT-323	16ta	-	3a	Tos
FB	-	2SC5376-B	Si-npn	Sw, Muting, 15V, 400mA, 100mW, 130MHz, B=500..1000	SOT-416	16ta	-	3a	Tos
FB	-	2SC5376F-B	Si-npn	Sw, Muting, 15V, 400mA, 100mW, 130MHz, B=500..1000	SOT-490	18ta	-	3a	Tos
FB	-	2SC5376FV-B	Si-npn	Sw, Muting, 15V, 400mA, 150mW, 130MHz, B=500..1000	SOT-723	18ta	-	3a	Tos
FB	-	2SC5384-B	Si-npn	HF, AM/FM, 30V, 30mA, 125mW, 200MHz, B=35..70	SC-75A	16ta	-	3a	Ish
FB	-	ELM7621LDB	Vdet-IC	2.1V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
FB	-	KRC152F	Si-npn-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1/R2=10k/10k	TFSM	19ta	-	3k	Kec
FB	-	RT9808-46CV	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FB	-	SiP810CLEUADT	Vdet-IC	4.63V±1.5%, +Reset PPO 1.5ms	SOT-23	16vdc	VD7	3g	Vs
FB	-	TC1277-10ENB	Vdet-IC	2.88V±2%, +Reset PPO	SOT-23	16vda	VD7	3d	Mcc
FBAA	-	MAX6326UR28	Vdet-IC	2.8V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FBs	-	BFR360F	Si-npn	RF, 15V, 35mA, 210mW, 14GHz, B=90..160	TSFP-3	18ta	-	3a	Inf
fC	-	BU46K374G	Vdet-IC	3.7V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Fc	-	BD49K57G	Vdet-IC	5.7V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
FC	-	2SC2619-C	Si-npn	AF, 100mA, 150mW, B=100..200, 230MHz	SOT-23	16ta	-	3a	Ren
FC	-	2SC3053-C	Si-npn	GP, AM/FM, 30V, 30mA, 150mW, B=55..110, 200MHz	SC-59	16ta	-	3a	Mit
FC	-	2SC4258-C	Si-npn	HF, AM/FM, 30V, 30mA, 150mW, 200MHz, B=55..110	SOT-323	16ta	-	3a	Mit
FC	-	2SC5384-C	Si-npn	HF, AM/FM, 30V, 30mA, 125mW, 200MHz, B=55..110	SC-75A	16ta	-	3a	Ish
FC	-	ELM7622LDB	Vdet-IC	2.2V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
FC	-	KRC153F	Si-npn-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1/R2=22k/22k	TFSM	19ta	-	3k	Kec
FC	-	RT9808-22CV	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FC	-	TC1277-20ENB	Vdet-IC	2.55V±2%, +Reset PPO	SOT-23	16vda	VD7	3d	Mcc
FC	-	UN211V	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=2k2/2k2	SC-59	16ta	-	3a	Pan
FC	-	UN511V	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=2k2/2k2	SOT-23	16ta	-	3a	Pan
FC	-	UNR211V	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=2k2/2k2	SC-59	16ta	-	3a	Pan
FC	-	UNR511V	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=2k2/2k2	SOT-323	16ta	-	3a	Pan
FC	-	UNR911VJ	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 80MHz, R1/R2=2k2/2k2	SS-MiniF	18ta	-	3a	Pan
FC-	-	RT9808-22PV	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FC11G	-	AIC1747-11GK3	LVR-IC	LDO, 1.1V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC11P	-	AIC1747-11PK3	LVR-IC	LDO, 1.1V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC12G	-	AIC1747-12GK3	LVR-IC	LDO, 1.2V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC12P	-	AIC1747-12PK3	LVR-IC	LDO, 1.2V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC13G	-	AIC1747-13GK3	LVR-IC	LDO, 1.3V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC13P	-	AIC1747-13PK3	LVR-IC	LDO, 1.3V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC15G	-	AIC1747-15GK3	LVR-IC	LDO, 1.5V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC15P	-	AIC1747-15PK3	LVR-IC	LDO, 1.5V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC18G	-	AIC1747-18GK3	LVR-IC	LDO, 1.8V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC18P	-	AIC1747-18PK3	LVR-IC	LDO, 1.8V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC2	-	CMUT2907A	Si-pnp	GP, 60V, 600mA, 250mW, B=100..300, 200MHz	SOT-523F	18ta	-	3a	Cen
FC20G	-	AIC1747-20GK3	LVR-IC	LDO, 2.0V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC20P	-	AIC1747-20PK3	LVR-IC	LDO, 2.0V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC25G	-	AIC1747-25GK3	LVR-IC	LDO, 2.5V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC25P	-	AIC1747-25PK3	LVR-IC	LDO, 2.5V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC27G	-	AIC1747-27GK3	LVR-IC	LDO, 2.7V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC27P	-	AIC1747-27PK3	LVR-IC	LDO, 2.7V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC2JG	-	AIC1747-285GK3	LVR-IC	LDO, 2.85V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC2JP	-	AIC1747-285PK3	LVR-IC	LDO, 2.85V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC30G	-	AIC1747-30GK3	LVR-IC	LDO, 3.0V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC30P	-	AIC1747-30PK3	LVR-IC	LDO, 3.0V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC33G	-	AIC1747-33GK3	LVR-IC	LDO, 3.3V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC33P	-	AIC1747-33PK3	LVR-IC	LDO, 3.3V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC35G	-	AIC1747-35GK3	LVR-IC	LDO, 3.5V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC35P	-	AIC1747-35PK3	LVR-IC	LDO, 3.5V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC37G	-	AIC1747-37GK3	LVR-IC	LDO, 3.7V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FC37P	-	AIC1747-37PK3	LVR-IC	LDO, 3.7V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC38G	-	AIC1747-38GK3	LVR-IC	LDO, 3.8V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FC38P	-	AIC1747-38PK3	LVR-IC	LDO, 3.8V±2%, 300mA	TSOT-23	16cg	VR1	3a	Aic
FCAA	-	MAX6326_R29-T	Vdet-IC	2.9V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FCAA	-	MAX6326UR29	Vdet-IC	2.9V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
fD	-	BU46K384G	Vdet-IC	3.8V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Fd	-	BD49K58G	Vdet-IC	5.8V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
FD	-	2SC3053-D	Si-npn	GP, AM/FM, 30V, 30mA, 150mW, B=90..180, 200MHz	SC-59	16ta	-	3a	Mit
FD	-	2SC4258-D	Si-npn	HF, AM/FM, 30V, 30mA, 150mW, 200MHz, B=90..180	SOT-323	16ta	-	3a	Mit
FD	-	2SC5384-D	Si-npn	HF, AM/FM, 30V, 30mA, 125mW, 200MHz, B=90..180	SC-75A	16ta	-	3a	Ish
FD	-	AAT3562IGY-2.70	Vdet-IC	2.7V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ant
FD	-	BCV26	Si-pnp-Darl	AF, 40V, 500mA, 300mW, 200MHz, B>4000	SOT-23	16ta	-	3a	Ste
FD	-	ELM7623LDB	Vdet-IC	2.3V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
FD	-	KRC154F	Si-npn-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1/R2=47k/47k	TFSM	19ta	-	3k	Kec
FD	-	RT9808-26CV	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FD	-	SiP810CREUDDT	Vdet-IC	2.63V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
FD	-	UN221V	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=2k2/2k2	SC-59	16ta	-	3a	Pan
FD	-	UN521V	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=2k2/2k2	SOT-23	16ta	-	3a	Pan
FD	-	UNR221V	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=2k2/2k2	SC-59	16ta	-	3a	Pan
FD	-	UNR521V	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=2k2/2k2	SOT-323	16ta	-	3a	Pan
FD	-	UNR921VJ	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 150MHz, R1/R2=2k2/2k2	SS-MiniF	18ta	-	3a	Pan
FDAA	-	MAX6326_R31-T	Vdet-IC	3.1V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FDAA	-	MAX6326UR31	Vdet-IC	3.1V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FDp	-	BCV26	Si-pnp-Darl	AF, 40V, 500mA, 300mW, 200MHz, B>4000	SOT-23	16ta	-	3a	PhH
FDs	-	BCV26	Si-pnp-Darl	AF, 40V, 500mA, 300mW, 200MHz, B>4000	SOT-23	16ta	-	3c	Inf
FDt	-	BCV26	Si-pnp-Darl	AF, 40V, 500mA, 300mW, 200MHz, B>4000	SOT-23	16ta	-	3a	PhM
FDW	-	BCV26	Si-pnp-Darl	AF, 40V, 500mA, 300mW, 200MHz, B>4000	SOT-23	16ta	-	3a	PhC
fE	-	BU46K394G	Vdet-IC	3.9V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Fe	-	BD49K59G	Vdet-IC	5.9V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
FE	-	BCV46	Si-pnp-Darl	AF, 80V, 500mA, 300mW, 200MHz, B>2000	SOT-23	16ta	-	3a	Ste
FE	-	ELM7624LDB	Vdet-IC	2.4V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
FE	-	SiP810C27EUDDT	Vdet-IC	2.7V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
FE	-	UN211Z	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=4k7/22k	SC-59	16ta	-	3a	Pan
FE	-	UN511Z	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=4k7/22k	SOT-23	16ta	-	3a	Pan
FE	-	UNR211Z	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 80MHz, R1/R2=4k7/22k	SC-59	16ta	-	3a	Pan
FE	-	UNR511Z	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=4k7/22k	SOT-323	16ta	-	3a	Pan
FE-	-	RT9808-25PV	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FE11G	-	AIC1747-11GU3	LVR-IC	LDO, 1.1V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE11P	-	AIC1747-11PU3	LVR-IC	LDO, 1.1V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE12G	-	AIC1747-12GU3	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE12P	-	AIC1747-12PU3	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE13G	-	AIC1747-13GU3	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE13P	-	AIC1747-13PU3	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE15G	-	AIC1747-15GU3	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE15P	-	AIC1747-15PU3	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE18G	-	AIC1747-18GU3	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE18P	-	AIC1747-18PU3	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE20G	-	AIC1747-20GU3	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE20P	-	AIC1747-20PU3	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE25G	-	AIC1747-25GU3	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE25P	-	AIC1747-25PU3	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE27G	-	AIC1747-27GU3	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE27P	-	AIC1747-27PU3	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE2JG	-	AIC1747-285GU3	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE2JP	-	AIC1747-285PU3	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE30G	-	AIC1747-30GU3	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE30P	-	AIC1747-30PU3	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE33G	-	AIC1747-33GU3	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE33P	-	AIC1747-33PU3	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE35G	-	AIC1747-35GU3	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE35P	-	AIC1747-35PU3	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE37G	-	AIC1747-37GU3	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE37P	-	AIC1747-37PU3	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE38G	-	AIC1747-38GU3	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FE38P	-	AIC1747-38PU3	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Aic
FEAA	-	MAX6326_R30-T	Vdet-IC	3.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FEAA	-	MAX6326UR30	Vdet-IC	3.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FEp	-	BCV46	Si-pnp-Darl	AF, 80V, 500mA, 300mW, 200MHz, B>2000	SOT-23	16ta	-	3a	PhH
FEs	-	BCV46	Si-pnp-Darl	AF, 80V, 500mA, 300mW, 200MHz, B>2000	SOT-23	16ta	-	3c	Inf
FEt	-	BCV46	Si-pnp-Darl	AF, 80V, 500mA, 300mW, 200MHz, B>2000	SOT-23	16ta	-	3a	PhM

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FEW	-	BCV46	Si-pnp-Darl	AF, 80V, 500mA, 300mW, 200MHz, B>2000	SOT-23	16ta	-	3a	PhC
fF	-	BU46K404G	Vdet-IC	4.0V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Ff	-	BD49K60G	Vdet-IC	6.0V±1%, -Reset PPO	SSOP-3	16vdc	VD7	3q	Rhm
FF	-	BCV27	Si-npn-Darl	AF, 40V, 300mA, 300mW, 200MHz, B>4000	SOT-23	16ta	-	3a	Ste
FF	-	ELM7625LDB	Vdet-IC	2.5V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
FF	-	RT9808-17CV	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FF	-	UN221Z	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=4k7/22k	SC-59	16ta	-	3a	Pan
FF	-	UN521Z	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=4k7/22k	SOT-23	16ta	-	3a	Pan
FF	-	UNR221Z	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 150MHz, R1/R2=4k7/22k	SC-59	16ta	-	3a	Pan
FF	-	UNR521Z	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=4k7/22k	SOT-323	16ta	-	3a	Pan
FFAA	-	MAX6327UR23-T	Vdet-IC	2.3V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FFMA	-	MAX6327UR31-T	Vdet-IC	3.1V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FFNA	-	MAX6327UR30-T	Vdet-IC	3.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FFp	-	BCV27	Si-npn-Darl	AF, 40V, 500mA, 300mW, 200MHz, B>4000	SOT-23	16ta	-	3a	PhH
FFs	-	BCV27	Si-npn-Darl	AF, 40V, 500mA, 300mW, 200MHz, B>4000	SOT-23	16ta	-	3c	Inf
FFt	-	BCV27	Si-npn-Darl	AF, 40V, 500mA, 300mW, 200MHz, B>4000	SOT-23	16ta	-	3a	PhM
FFW	-	BCV27	Si-npn-Darl	AF, 40V, 500mA, 300mW, 200MHz, B>4000	SOT-23	16ta	-	3a	PhC
fG	-	BU46K414G	Vdet-IC	4.1V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Fg	-	BD48L23G	Vdet-IC	2.3V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
FG	-	ELM7626LDB	Vdet-IC	2.6V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
FG	-	KRC157F	Si-npn-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1/R2=10/47k	TFSM	19ta	-	3k	Kec
FG	-	RT9808-24CV	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FG	-	SiP810CSEUDDT	Vdet-IC	2.93V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
FG-	-	RT9808-24PV	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FGAA	-	MAX6327UR24-T	Vdet-IC	2.4V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FGp	-	BCV47	Si-npn-Darl	AF, 80V, 500mA, 300mW, 200MHz, B>2000	SOT-23	16ta	-	3a	PhH
FGR	-	KTA2013F-GR	Si-pnp	AF, Sw, 20V, 150mA, 50mW, B=200..400, >80MHz	TFSM	19ta	-	3f	Kec
FGs	-	BCV47	Si-npn-Darl	AF, 80V, 500mA, 300mW, 200MHz, B>2000	SOT-23	16ta	-	3c	Inf
FGt	-	BCV47	Si-npn-Darl	AF, 80V, 500mA, 300mW, 200MHz, B>2000	SOT-23	16ta	-	3a	PhM
FGW	-	BCV47	Si-npn-Darl	AF, 80V, 500mA, 300mW, 200MHz, B>2000	SOT-23	16ta	-	3a	PhC
fH	-	BU46K424G	Vdet-IC	4.2V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Fh	-	BD48L24G	Vdet-IC	2.4V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
FH	-	1SS366	Si-diode	Dual, SBD, VHF/UHF-det/mix, 10V, 35mA, VF<0.42V(1mA), <0.85pF	CP	16dl	-	3a	San
FH	-	1SS375	Si-diode	Dual, SBD, VHF/UHF-det/mix, VF<0.42V(1mA), <0.85pF	MCP	16dl	-	3a	San
FH	-	ELM7627LDB	Vdet-IC	2.7V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
FH	-	KRC158F	Si-npn-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1/R2=22k/47k	TFSM	19ta	-	3k	Kec
FH	-	RT9808-45CV	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FH	-	SiP810CTEUDDT	Vdet-IC	3.08V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
FHAA	-	MAX6327UR25-T	Vdet-IC	2.5V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FHP	-	2SC5020-P	Si-npn	AM/FM, 30V, 15mA, 150mW, B=40..110, 650MHz	SOT-323	16ta	-	3a	Pan
FHQ	-	2SC5020-Q	Si-npn	AM/FM, 30V, 15mA, 150mW, B=65..160, 650MHz	SOT-323	16ta	-	3a	Pan
FHR	-	2SC5020-R	Si-npn	AM/FM, 30V, 15mA, 150mW, B=100..260, 650MHz	SOT-323	16ta	-	3a	Pan
FHs	-	BFN24	Si-npn	Vid, 250V, 200mA, 360mW, B>40, 70MHz	SOT-23	16ta	-	3a	Sie
FI	-	SiP810CJEUDDT	Vdet-IC	4.0V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
FIAA	-	MAX6327UR26-T	Vdet-IC	2.6V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FJ	-	ELM7628LDB	Vdet-IC	2.8V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
FJ	-	KRC159F	Si-npn-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1/R2=47k/22k	TFSM	19ta	-	3k	Kec
FJ	-	RT9808-50CV	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FJ3	-	2SK1069-3	n-FET	GP, AF, 40V, 20mA, 150mW, Idss=1.2..3mA, Up<2V	MCP	16fa	-	3a	San
FJ3	-	2SK771-3	n-FET	AF-Amp, 40V, 20mA, 200mW, Idss=1.2..3mA	SOT-23	16fa	-	3a	San
FJ4	-	2SK1069-4	n-FET	GP, AF, 40V, 20mA, 150mW, Idss=2.5..6mA, Up<2V	MCP	16fa	-	3a	San
FJ4	-	2SK771-4	n-FET	AF-Amp, 40V, 20mA, 200mW, Idss=2.5..6mA	SOT-23	16fa	-	3a	San
FJ5	-	2SK1069-5	n-FET	GP, AF, 40V, 20mA, 150mW, Idss=5..12mA, Up<2V	MCP	16fa	-	3a	San
FJ5	-	2SK771-5	n-FET	AF-Amp, 40V, 20mA, 200mW, Idss=5..12mA	SOT-23	16fa	-	3a	San
FJAA	-	MAX6327UR27-T	Vdet-IC	2.7V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FJs	-	BFN26	Si-npn	Vid, 300V, 200mA, 360mW, B>30, 70MHz	SOT-23	16ta	-	3a	Sie
fK	-	BU46K434G	Vdet-IC	4.3V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Fk	-	BD48L25G	Vdet-IC	2.5V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
FK	-	ELM7629LDB	Vdet-IC	2.9V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
FK	-	KRC160F	Si-npn-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1=4.7k	TFSM	19ta	-	3k	Kec
FK	-	RT9808-32CV	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FK	-	SiP810CMEUDDT	Vdet-IC	4.38V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
FK	-	UNR32A1	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=10k/10k	SSSMini3	18ta	-	3a	Pan
FKAA	-	MAX6327UR28-T	Vdet-IC	2.8V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FKs	-	BFN25	Si-pnp	Vid, 250V, 200mA, 360mW, B>40, 100MHz	SOT-23	16ta	-	3a	Sie
FL	-	2SA1434	Si-pnp	AF, Amp, 60V, 100mA, 200mW, B=500..1200, >100MHz	SOT-23	16ta	-	3a	San
FL	-	KRC161F	Si-npn-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1=10k	TFSM	19ta	-	3k	Kec
FL	-	SiP810CLEUDDT	Vdet-IC	4.63V±1.5%, +Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
FL	-	UNR32A2	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R/R2=22k/22k	SSSMini3	18ta	-	3a	Pan
FL11G	-	AIC1746-11GK3	LVR-IC	LDO, 1.1V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FL11P	-	AIC1746-11PK3	LVR-IC	LDO, 1.1V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL12G	-	AIC1746-12GK3	LVR-IC	LDO, 1.2V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL12P	-	AIC1746-12PK3	LVR-IC	LDO, 1.2V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL13G	-	AIC1746-13GK3	LVR-IC	LDO, 1.3V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL13P	-	AIC1746-13PK3	LVR-IC	LDO, 1.3V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL15G	-	AIC1746-15GK3	LVR-IC	LDO, 1.5V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL15P	-	AIC1746-15PK3	LVR-IC	LDO, 1.5V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL18G	-	AIC1746-18GK3	LVR-IC	LDO, 1.8V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL18P	-	AIC1746-18PK3	LVR-IC	LDO, 1.8V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL20G	-	AIC1746-20GK3	LVR-IC	LDO, 2.0V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL20P	-	AIC1746-20PK3	LVR-IC	LDO, 2.0V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL25G	-	AIC1746-25GK3	LVR-IC	LDO, 2.5V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL25P	-	AIC1746-25PK3	LVR-IC	LDO, 2.5V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL27G	-	AIC1746-27GK3	LVR-IC	LDO, 2.7V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL27P	-	AIC1746-27PK3	LVR-IC	LDO, 2.7V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL2JG	-	AIC1746-285GK3	LVR-IC	LDO, 2.85V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL2JP	-	AIC1746-285PK3	LVR-IC	LDO, 2.85V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL30G	-	AIC1746-30GK3	LVR-IC	LDO, 3.0V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL30P	-	AIC1746-30PK3	LVR-IC	LDO, 3.0V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL33G	-	AIC1746-33GK3	LVR-IC	LDO, 3.3V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL33P	-	AIC1746-33PK3	LVR-IC	LDO, 3.3V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL35G	-	AIC1746-35GK3	LVR-IC	LDO, 3.5V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL35P	-	AIC1746-35PK3	LVR-IC	LDO, 3.5V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL37G	-	AIC1746-37GK3	LVR-IC	LDO, 3.7V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL37P	-	AIC1746-37PK3	LVR-IC	LDO, 3.7V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL38G	-	AIC1746-38GK3	LVR-IC	LDO, 3.8V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FL38P	-	AIC1746-38PK3	LVR-IC	LDO, 3.8V±2%, 150mA	TSOT-23	16cg	VR1	3a	Aic
FLAA	-	MAX6327UR29-T	Vdet-IC	2.9V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FLs	-	BFN27	Si-pnp	Vid, 300V, 200mA, 360mW, B>30, 100MHz	SOT-23	16ta	-	3a	Sie
fM	-	BU46K444G	Vdet-IC	4.4V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Fm	-	BD48L26G	Vdet-IC	2.6V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
FM	-	2SJ502	p-MOSFET	Sw, U-Speed, LogL, 30V, 500mA, 250mW, 8/40ns, <0.9Ω(300mA)	SOT-23	16fh	-	3a	San
FM	-	RT9808-40CV	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FM-	-	RT9808-40PV	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FM0	-	BB804-0	C-diode	Dual, VHF, 18V, 50mA, 42/43.5pF	SOT-23	16dg	-	3g	Vs
FM1	-	BB804-1	C-diode	Dual, VHF, 18V, 50mA, 43/44.5pF	SOT-23	16dg	-	3g	Vs
FM2	-	BB804-2	C-diode	Dual, VHF, 18V, 50mA, 44/45.5pF	SOT-23	16dg	-	3g	Vs
FM3	-	BB804-3	C-diode	Dual, VHF, 18V, 50mA, 45/46.5pF	SOT-23	16dg	-	3g	Vs
FM4	-	BB804-4	C-diode	Dual, VHF, 18V, 50mA, 46/47.5pF	SOT-23	16dg	-	3g	Vs
fN	-	BU46K454G	Vdet-IC	4.5V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Fn	-	BD48L27G	Vdet-IC	2.7V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
FN	-	KRC163F	Si-npn-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1=22k	TFSM	19ta	-	3k	Kec
FN	-	RT9808-15CV	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FN	-	SiP810CREUEDT	Vdet-IC	2.63V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
FN	-	UNR32A3	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=47k/47k	SSSMini3	18ta	-	3a	Pan
FN11G	-	AIC1746-11GU3	LVR-IC	LDO, 1.1V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN11P	-	AIC1746-11PU3	LVR-IC	LDO, 1.1V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN12G	-	AIC1746-12GU3	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN12P	-	AIC1746-12PU3	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN13G	-	AIC1746-13GU3	LVR-IC	LDO, 1.3V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN13P	-	AIC1746-13PU3	LVR-IC	LDO, 1.3V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN15G	-	AIC1746-15GU3	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN15P	-	AIC1746-15PU3	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN18G	-	AIC1746-18GU3	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN18P	-	AIC1746-18PU3	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN20G	-	AIC1746-20GU3	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN20P	-	AIC1746-20PU3	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN25G	-	AIC1746-25GU3	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN25P	-	AIC1746-25PU3	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN27G	-	AIC1746-27GU3	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN27P	-	AIC1746-27PU3	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN2JG	-	AIC1746-285GU3	LVR-IC	LDO, 2.85V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN2JP	-	AIC1746-285PU3	LVR-IC	LDO, 2.85V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN3	-	2SC4863-3	Si-npn	VHF/UHF-Amp, 16V, 70mA, 200mW, B=60..120, 7GHz	MCP	16ta	-	3a	San
FN3	-	2SC4864-3	Si-npn	VHF/UHF-Amp, 16V, 70mA, 200mW, B=60..120, 7GHz	CP	16ta	-	3a	San
FN30G	-	AIC1746-30GU3	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN30P	-	AIC1746-30PU3	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN33G	-	AIC1746-33GU3	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN33P	-	AIC1746-33PU3	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN35G	-	AIC1746-35GU3	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FN35P	-	AIC1746-35PU3	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN37G	-	AIC1746-37GU3	LVR-IC	LDO, 3.7V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN37P	-	AIC1746-37PU3	LVR-IC	LDO, 3.7V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN38G	-	AIC1746-38GU3	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN38P	-	AIC1746-38PU3	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-23	16cg	VR1	3a	Aic
FN4	-	2SC4863-4	Si-npn	VHF/UHF-Amp, 16V, 70mA, 200mW, B=90..180, 7GHz	MCP	16ta	-	3a	San
FN4	-	2SC4864-4	Si-npn	VHF/UHF-Amp, 16V, 70mA, 200mW, B=90..180, 7GHz	CP	16ta	-	3a	San
FN5	-	2SC4863-5	Si-npn	VHF/UHF-Amp, 16V, 70mA, 200mW, B=90..180, 7GHz	MCP	16ta	-	3a	San
FN5	-	2SC4864-5	Si-npn	VHF/UHF-Amp, 16V, 70mA, 200mW, B=130..270, 7GHz	CP	16ta	-	3a	San
FO	-	2SC2716-O	Si-npn	HF/AF, 35V, 100mA, 150mW, B=40..80, 120MHz	SOT-23	16ta	-	3a	Tos
FO	-	2SC5344U-O	Si-npn	AF, 35V, 800mA, 200mW, 120MHz, B=100..200	SOT-323	18ta	-	3a	Auk
FO	-	SiP810C27EUEDT	Vdet-IC	2.7V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
FOAA	-	MAX6328UR23-T	Vdet-IC	2.3V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
fP	-	BU46K464G	Vdet-IC	4.6V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
FP	-	2SA1037AK-P	Si-pnp	AF, 60V, 150mA, 200mW, B=120..270, >120MHz	SC-59	16ta	-	3a	Sec
FP	-	2SA1774EB-P	Si-pnp	AF, 60V, 150mA, 150mW, B=82..180, 140MHz	EMT3F	18ta	-	3a	Rhm
FP	-	KRC164F	Si-npn-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1=47k	TFSM	19ta	-	3k	Kec
FP	-	RT9808-23CV	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FP	-	SiP810CSEUEDT	Vdet-IC	2.93V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
FP	-	UNR32A4	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=10k47k	SSSMini3	18ta	-	3a	Pan
FP-	-	RT9808-23PV	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
FPAA	-	MAX6328UR24-T	Vdet-IC	2.4V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
Fpr	-	BD48L28G	Vdet-IC	2.8V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
FQ	-	2PA1576Q	Si-pnp	GP, 50V, 100mA, 200mW, >100MHz, B=120..270	SOT-323	16ta	-	3a	PhH
FQ	-	2SA1037AK-Q	Si-pnp	AF, 60V, 150mA, 200mW, B=120..270, >140MHz	SC-59	16ta	-	3a	Rhm
FQ	-	2SA1037-Q	Si-pnp	AF, 60V, 150mA, 200mW, B=120..270, >120MHz	SOT-23	16ta	-	3a	Sec
FQ	-	2SA1576A-Q	Si-pnp	AF, 60V, 150mA, 200mW, B=120..270, >140MHz	UMT3	16ta	-	3a	Rhm
FQ	-	2SA1576-Q	Si-pnp	GP, 60V, 100mA, 150mW, B=120..270, 140MHz	SOT-323	16ta	-	3a	Rhm
FQ	-	2SA1774EB-Q	Si-pnp	AF, 60V, 150mA, 150mW, B=120..270, 140MHz	EMT3F	18ta	-	3a	Rhm
FQ	-	2SA1774-Q	Si-pnp	AF, 60V, 100mA, 150mW, B=120..270, 140MHz	EMT3	16ta	-	3a	Rhm
FQ	-	2SA2029-Q	Si-pnp	GP, 60V, 100mA, 150mW, B=120..270, 140MHz	VMT3	18ta	-	3a	Rhm
FQ	-	2SB1610	Si-pnp	Lo-sat, 10V, 500mA, 120MHz	SOT-23	16te	-	3a	Pan
FQ	-	2SB1618	Si-pnp	AF, Lo-sat, 10V, 500mA, 150mW, B=200..800, 120MHz	SOT-323	16ta	-	3a	Pan
FQ	-	L2SA1774QT1	Si-pnp	GP, 60V, 150mA, 150mW, B=120..270, 140MHz	SC-89	16ta	-	3a	Lrc
FQ	-	RT9818C-22CV	Vdet-IC	2.2V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
FQAA	-	MAX6328UR25-T	Vdet-IC	2.5V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FQW	-	2PA1576Q	Si-pnp	GP, 50V, 100mA, 200mW, >100MHz, B=120..270	SOT-323	16ta	-	3a	PhC
fR	-	BU46K474G	Vdet-IC	4.7V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
Fr	-	BD48L29G	Vdet-IC	2.9V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
FR	-	2PA1576R	Si-pnp	GP, 50V, 100mA, 200mW, >100MHz, B=180..390	SOT-323	16ta	-	3a	PhH
FR	-	2SA1034-R	Si-pnp	AF, LN, 55V, 10mA, 200mW, B=180..360, 200MHz	SC-59	16ta	-	3a	Pan
FR	-	2SA1037AK-R	Si-pnp	AF, 60V, 150mA, 200mW, B=180..390, >140MHz	SC-59	16ta	-	3a	Rhm
FR	-	2SA1037-R	Si-pnp	AF, 60V, 150mA, 200mW, B=180..390, >120MHz	SOT-23	16ta	-	3a	Sec
FR	-	2SA1531-R	Si-pnp	AF, LN, 35V, 50mA, 150mW, B=180..360, 80MHz	SOT-323	16ta	-	3a	Pan
FR	-	2SA1576A-R	Si-pnp	AF, 60V, 150mA, 200mW, B=180..390, >140MHz	UMT3	16ta	-	3a	Rhm
FR	-	2SA1576-R	Si-pnp	GP, 60V, 100mA, 150mW, B=180..390, 140MHz	SOT-323	16ta	-	3a	Rhm
FR	-	2SA1774EB-R	Si-pnp	AF, 60V, 150mA, 150mW, B=180..390, 140MHz	EMT3F	18ta	-	3a	Rhm
FR	-	2SA1774-R	Si-pnp	AF, 60V, 100mA, 150mW, B=180..390, 140MHz	EMT3	16ta	-	3a	Rhm
FR	-	2SA2029-R	Si-pnp	GP, 60V, 100mA, 150mW, B=180..390, 140MHz	VMT3	18ta	-	3a	Rhm
FR	-	2SC2716-R	Si-npn	HF/AF, 35V, 100mA, 150mW, B=70..140, 120MHz	SOT-23	16ta	-	3a	Tos
FR	-	2SD2472	Si-npn	Lo-sat, 10V, 500mA, 200mW, B=200..800, 120MHz	SOT-23	16ta	-	3a	Pan
FR	-	L2SA1774RT1	Si-pnp	GP, 60V, 150mA, 150mW, B=180..390, 140MHz	SC-89	16ta	-	3a	Lrc
FR	-	RT9818C-29CV	Vdet-IC	2.9V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
FR	-	SiP810CTEUEDT	Vdet-IC	3.08V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
FR-	-	2SC5772	Si-npn	UHF/VHF WB-amp, 15V, 75mA, 750mW, 9GHz, B=80..160	MPAK	16ta	-	3a	Ren
FR-	-	RT9818C-29PV	Vdet-IC	2.9V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
FR=	-	RT9818C-29GV	Vdet-IC	2.9V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
FRAA	-	MAX6328UR26-T	Vdet-IC	2.6V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FRW	-	2PA1576R	Si-pnp	GP, 50V, 100mA, 200mW, >100MHz, B=180..390	SOT-323	16ta	-	3a	PhC
fS	-	BU46K484G	Vdet-IC	4.8V±1%, -Reset PPO, Td=400ms	SSOP-3	16vdc	VD7	3q	Rhm
FS	-	2PA1576S	Si-pnp	GP, 50V, 100mA, 200mW, >100MHz, B=270..560	SOT-323	16ta	-	3a	PhH
FS	-	2SA1034-S	Si-pnp	AF, LN, 55V, 10mA, 200mW, B=260..520, 200MHz	SC-59	16ta	-	3a	Pan
FS	-	2SA1037AK-S	Si-pnp	AF, 60V, 150mA, 200mW, B=270..560, >140MHz	SC-59	16ta	-	3a	Rhm
FS	-	2SA1037-S	Si-pnp	AF, 60V, 150mA, 200mW, B=270..560, >120MHz	SOT-23	16ta	-	3a	Sec
FS	-	2SA1531-S	Si-pnp	AF, LN, 35V, 50mA, 150mW, B=260..520, 80MHz	SOT-323	16ta	-	3a	Pan
FS	-	2SA1576A-S	Si-pnp	AF, 60V, 150mA, 200mW, B=270..560, >140MHz	UMT3	16ta	-	3a	Rhm
FS	-	2SA1576-S	Si-pnp	GP, 60V, 100mA, 150mW, B=270..560, 140MHz	SOT-323	16ta	-	3a	Rhm
FS	-	2SA1763	Si-pnp	Sw, 15V, 200mA, 150mW, B=50..140, 1GHz	MCP	16ta	-	3a	San
FS	-	2SA1764	Si-pnp	Fast-Sw, 15V, 200mA, 200mW, B=50..140, 1GHz, 11/19ns	SOT-23	16ta	-	3a	San
FS	-	2SA1774EB-S	Si-pnp	AF, 60V, 150mA, 150mW, B=270..560, 140MHz	EMT3F	18ta	-	3a	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FS	-	2SA1774-S	Si-pnp	AF, 60V, 100mA, 150mW, B=270..560, 140MHz	EMT3	16ta	-	3a	Rhm
FS	-	2SA2029-S	Si-pnp	GP, 60V, 100mA, 150mW, B=270..560, 140MHz	VMT3	18ta	-	3a	Rhm
FS	-	2SB1611	Si-pnp	Lo-sat, 20V, 500mA, 100MHz	SOT-23	16te	-	3a	Pan
FS	-	2SB1619	Si-pnp	AF, Lo-sat, 20V, 500mA, 150mW, B=200..800, 100MHz	SOT-323	16ta	-	3a	Pan
FS	-	L2SA1774ST1	Si-pnp	GP, 60V, 150mA, 150mW, B=270..560, 140MHz	SC-89	16ta	-	3a	Lrc
FS	-	RT9818C-30CV	Vdet-IC	3.0V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
FS	-	SiP810CJEUEDT	Vdet-IC	4.0V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
FS-	-	2SC5990	Si-npn	UHF/VHF WB-amp, 20V, 75mA, 750mW, 7.8GHz, B=100..200	MPAK	16ta	-	3a	Ren
FS-	-	RT9818C-30PV	Vdet-IC	3.0V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
FSAA	-	MAX6328UR27-T	Vdet-IC	2.7V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FSW	-	2PA1576S	Si-pnp	GP, 50V, 100mA, 200mW, >100MHz, B=270..560	SOT-323	16ta	-	3a	PhC
fT	-	BU45L232G	Vdet-IC	2.3V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
FT	-	2SA1034-T	Si-pnp	AF, LN, 55V, 10mA, 200mW, B=360..700, 200MHz	SC-59	16ta	-	3a	Pan
FT	-	2SA1531-T	Si-pnp	AF, LN, 35V, 50mA, 150mW, B=360..700, 80MHz	SOT-323	16ta	-	3a	Pan
FT	-	2SC4146	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4.7k/47k	SOT-23	16ta	-	3a	San
FT	-	2SD2473	Si-npn	Lo-sat, 20V, 500mA	SOT-23	16te	-	3a	Pan
FT	-	CHT5551PT	Si-npn	Drv, 160V, 600mA, B=80..250, 300MHz	SOT-23	16ta	-	3a	Chm
FT	-	RT9818C-40CV	Vdet-IC	4.0V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
FT	-	SiP810CMEUED	Vdet-IC	4.38V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
FTAA	-	MAX6328UR28-T	Vdet-IC	2.8V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FtQ	-	2PA1576Q	Si-pnp	GP, 50V, 100mA, 200mW, >100MHz, B=120..270	SOT-323	16ta	-	3a	PhM
FtR	-	2PA1576R	Si-pnp	GP, 50V, 100mA, 200mW, >100MHz, B=180..390	SOT-323	16ta	-	3a	PhM
FtS	-	2PA1576S	Si-pnp	GP, 50V, 100mA, 200mW, >100MHz, B=270..560	SOT-323	16ta	-	3a	PhM
FU-	-	RT9819C-25PV	Vdet-IC	2.5V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
FUAA	-	MAX6328UR29-T	Vdet-IC	2.9V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FV	-	1SV248	PIN-diode	VHF/UHF, 50V, 50mA, 0.23pF, 3.5Ω(100MHz)	MCP	16dc	-	3a	San
FV	-	1SV250	PIN-diode	VHF/UHF, 50V, 50mA, 0.23pF, 3.5Ω(100MHz)	SOT-23	16dc	-	3a	San
FV	-	SiP810CLEUDT	Vdet-IC	4.63V±1.5%, +Reset PPO 150ms	SOT-23	16vdc	VD7	3g	Vs
FV-	-	RT9819C-26PV	Vdet-IC	2.6V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
FVAA	-	MAX6328UR31-T	Vdet-IC	3.1V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
fW	-	BU45L242G	Vdet-IC	2.4V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
FW	-	AAT3562IGY-2.20	Vdet-IC	2.2V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ant
FW	-	UN2227	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=6k8/6k8	SC-59	16ta	-	3a	Pan
FW	-	UNR2227	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=6k8/6k8	SC-59	16ta	-	3a	Pan
FW	-	UNR5227	Si-npn-Digi	Sw, 30V, 600mA, 150mW, 200MHz, R1/R2=6k8/6k8	SOT-323	16ta	-	3a	Pan
FW-	-	RT9819C-29PV	Vdet-IC	2.9V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
FWAA	-	MAX6328UR30-T	Vdet-IC	3.0V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
fX	-	BU45L252G	Vdet-IC	2.5V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
FX	-	AAT3562IGY-2.30	Vdet-IC	2.3V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ant
FX	-	SiP810CREUDT	Vdet-IC	2.63V±1.5%, +Reset PPO 210ms	SOT-23	16vdc	VD7	3g	Vs
FX-	-	RT9819C-30PV	Vdet-IC	3.0V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
FX=	-	RT9819C-30GV	Vdet-IC	3.0V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
fY	-	BU45L262G	Vdet-IC	2.6V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Fy	-	BD48L30G	Vdet-IC	3.0V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
FY	-	2SC2716-Y	Si-npn	HF/AF, 35V, 100mA, 150mW, B=120..240, 120MHz	SOT-23	16ta	-	3a	Tos
FY	-	2SC3661	Si-npn	AF-Amp, 30V, 300mA, 200mW, B=800..3200, 250MHz	SOT-23	16ta	-	3a	San
FY	-	2SC5344U-Y	Si-npn	AF, 35V, 800mA, 200mW, 120MHz, B=160..320	SOT-323	18ta	-	3a	Auk
FY	-	KTA2013F-Y	Si-pnp	AF, Sw, 20V, 150mA, 50mW, B=120..240, >80MHz	TFSM	19ta	-	3f	Kec
FY	-	SiP810C27EUDT	Vdet-IC	2.7V±1.5%, +Reset PPO 210ms	SOT-23	16vdc	VD7	3g	Vs
FY	-	UN2226	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1=4k7	SC-59	16ta	-	3a	Pan
FY	-	UNR2226	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1=4k7	SC-59	16ta	-	3a	Pan
FY	-	UNR5226	Si-npn-Digi	Sw, 30V, 600mA, 150mW, 200MHz, R1=4k7	SOT-323	16ta	-	3a	Pan
FZ	-	SiP810CSEUDT	Vdet-IC	2.93V±1.5%, +Reset PPO 210ms	SOT-23	16vdc	VD7	3g	Vs
FZ	-	UN2225	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1=10k	SC-59	16ta	-	3a	Pan
FZ	-	UNR2225	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1=10k	SC-59	16ta	-	3a	Pan
FZ	-	UNR5225	Si-npn-Digi	Sw, 30V, 600mA, 150mW, 200MHz, R1=10k	SOT-323	16ta	-	3a	Pan
FZ-	-	RT9819C-44PV	Vdet-IC	4.4V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
FZAP	-	MAX6012AUR	Vref-IC	Precision, 1.247V±0.2%	SOT-23	16vj	VR1	3a	Max
FZAQ	-	MAX6025AUR	Vref-IC	Precision, 2.500V±0.2%	SOT-23	16vj	VR1	3a	Max
FZAR	-	MAX6041AUR	Vref-IC	Precision, 4.096V±0.2%	SOT-23	16vj	VR1	3a	Max
FZAS	-	MAX6045AUR	Vref-IC	Precision, 4.500V±0.2%	SOT-23	16vj	VR1	3a	Max
FZAT	-	MAX6050AUR	Vref-IC	Precision, 5.00V±0.2%	SOT-23	16vj	VR1	3a	Max
FZAU	-	MAX6021AUR	Vref-IC	Precision, 2.048V±0.2%	SOT-23	16vj	VR1	3a	Max
FZAV	-	MAX6346UR33-T	Vdet-IC	3.3V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZAW	-	MAX6346UR34-T	Vdet-IC	3.4V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZAX	-	MAX6346UR35-T	Vdet-IC	3.5V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZAY	-	MAX6346UR36-T	Vdet-IC	3.6V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZAZ	-	MAX6346UR37-T	Vdet-IC	3.7V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBA	-	MAX6346UR38-T	Vdet-IC	3.8V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBB	-	MAX6346UR39-T	Vdet-IC	3.9V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FZBC	-	MAX6346UR40-T	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBD	-	MAX6346UR41-T	Vdet-IC	4.1V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBE	-	MAX6346UR42-T	Vdet-IC	4.2V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBF	-	MAX6346UR43-T	Vdet-IC	4.3V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBG	-	MAX6346UR44-T	Vdet-IC	4.4V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBH	-	MAX6346UR45-T	Vdet-IC	4.5V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBI	-	MAX6346UR46-T	Vdet-IC	4.6V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBJ	-	MAX6348UR33-T	Vdet-IC	3.3V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBK	-	MAX6348UR34-T	Vdet-IC	3.4V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBL	-	MAX6348UR35-T	Vdet-IC	3.5V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBM	-	MAX6348UR36-T	Vdet-IC	3.6V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBN	-	MAX6348UR37-T	Vdet-IC	3.7V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBO	-	MAX6348UR38-T	Vdet-IC	3.8V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBP	-	MAX6348UR39-T	Vdet-IC	3.9V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBQ	-	MAX6348UR40-T	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBR	-	MAX6348UR41-T	Vdet-IC	4.1V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBS	-	MAX6348UR42-T	Vdet-IC	4.2V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBT	-	MAX6348UR43-T	Vdet-IC	4.3V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBU	-	MAX6348UR44-T	Vdet-IC	4.4V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBV	-	MAX6348UR45-T	Vdet-IC	4.5V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBW	-	MAX6348UR46-T	Vdet-IC	4.6V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZBX	-	MAX6348UR33-T	Vdet-IC	3.3V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZBY	-	MAX6348UR34-T	Vdet-IC	3.4V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZBZ	-	MAX6348UR35-T	Vdet-IC	3.5V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZCA	-	MAX6348UR36-T	Vdet-IC	3.6V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZCB	-	MAX6348UR37-T	Vdet-IC	3.7V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZCC	-	MAX6348UR38T	Vdet-IC	3.8V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZCD	-	MAX6348UR39-T	Vdet-IC	3.9V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZCE	-	MAX6348UR40-T	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZCF	-	MAX6348UR41-T	Vdet-IC	4.1V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZCG	-	MAX6348UR42T	Vdet-IC	4.2V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZCH	-	MAX6348UR43-T	Vdet-IC	4.3V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZCI	-	MAX6348UR44-T	Vdet-IC	4.4V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZCJ	-	MAX6348UR45-T	Vdet-IC	4.5V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZCK	-	MAX6348UR46-T	Vdet-IC	4.6V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZCL	-	MAX6332UR16D3	Vdet-IC	1.6V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZCM	-	MAX6332UR18D3	Vdet-IC	1.8V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZCN	-	MAX6332UR22D3	Vdet-IC	2.2V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZCO	-	MAX6333UR16D3	Vdet-IC	1.6V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZCP	-	MAX6333UR18D3	Vdet-IC	1.8V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZCQ	-	MAX6333UR20D3	Vdet-IC	2.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZCR	-	MAX6333UR22D3	Vdet-IC	2.2V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZCS	-	MAX6333UR23D3	Vdet-IC	2.3V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZCT	-	MAX6334UR16D3	Vdet-IC	1.6V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZCU	-	MAX6334UR18D3	Vdet-IC	1.8V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZCV	-	MAX6334UR22D3	Vdet-IC	2.2V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZCW	-	MAX6001EUR-T	Vref-IC	Precision, 1.250V±1%	SOT-23	16vj	VR1	3a	Max
FZCX	-	MAX6002EUR-T	Vref-IC	Precision, 2.500V±1%	SOT-23	16vj	VR1	3a	Max
FZCY	-	MAX6004EUR-T	Vref-IC	Precision, 4.096V±1%	SOT-23	16vj	VR1	3a	Max
FZCZ	-	MAX6005EUR-T	Vref-IC	Precision, 5.00V±1%	SOT-23	16vj	VR1	3a	Max
FZDA	-	MAX6012BUR	Vref-IC	Precision, 1.247V±0.39%	SOT-23	16vj	VR1	3a	Max
FZDB	-	MAX6025BUR	Vref-IC	Precision, 2.500V±0.39%	SOT-23	16vj	VR1	3a	Max
FZDC	-	MAX6041BUR	Vref-IC	Precision, 4.096V±0.39%	SOT-23	16vj	VR1	3a	Max
FZDD	-	MAX6045BUR	Vref-IC	Precision, 4.500V±0.39%	SOT-23	16vj	VR1	3a	Max
FZDE	-	MAX6050BUR	Vref-IC	Precision, 5.00V±0.39%	SOT-23	16vj	VR1	3a	Max
FZDF	-	MAX6021BUR	Vref-IC	Precision, 2.048V±0.39%	SOT-23	16vj	VR1	3a	Max
FZDK	-	MAX6003EUR-T	Vref-IC	Precision, 3.00V±1%	SOT-23	16vj	VR1	3a	Max
FZDL	-	MAX6332UR20D3	Vdet-IC	2.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZDM	-	MAX6332UR23D3	Vdet-IC	2.3V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Max
FZDN	-	MAX6334UR20D3	Vdet-IC	2.0V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZDO	-	MAX6334UR23D3	Vdet-IC	2.3V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Max
FZDP	-	MAX6806UR46-T	Vdet-IC	4.6V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Max
FZDQ	-	MAX6806UR26-T	Vdet-IC	2.6V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Max
FZDR	-	MAX6806UR23-T	Vdet-IC	2.3V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Max
FZDS	-	MAX6807UR46-T	Vdet-IC	4.6V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Max
FZDT	-	MAX6807UR26-T	Vdet-IC	2.6V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Max
FZDU	-	MAX6808UR46-T	Vdet-IC	4.6V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Max
FZDV	-	MAX6808UR26-T	Vdet-IC	2.6V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Max
FZDW	-	MAX6030AUR	Vref-IC	Precision, 3.00V±0.2%	SOT-23	16vj	VR1	3a	Max
FZDX	-	MAX6030BUR	Vref-IC	Precision, 3.00V±0.39%	SOT-23	16vj	VR1	3a	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FZEB	-	LM4041AIM3-1.2+T	Vref-IC	µPower, Precision, Shunt, 1.225V±0.1%, -40..+85°C	SOT-23	16dk	RF1	3a	Max
FZEC	-	LM4041BIM3-1.2+T	Vref-IC	µPower, Precision, Shunt, 1.225V±0.2%, -40..+85°C	SOT-23	16dk	RF1	3a	Max
FZED	-	LM4041CIM3-1.2+T	Vref-IC	µPower, Precision, Shunt, 1.225V±0.5%, -40..+85°C	SOT-23	16dk	RF1	3a	Max
FZEE	-	LM4041DIM3-1.2+T	Vref-IC	µPower, Precision, Shunt, 1.225V±1%, -40..+85°C	SOT-23	16dk	RF1	3a	Max
FZEF	-	LM4040AIM3-2.1+T	Vref-IC	µPower, Precision, Shunt, 2.048V±0.1%	SOT-23	16dk	RF1	3a	Max
FZEG	-	LM4040BIM3-2.1+T	Vref-IC	µPower, Precision, Shunt, 2.048V±0.2%	SOT-23	16dk	RF1	3a	Max
FZEH	-	LM4040CIM3-2.1+T	Vref-IC	µPower, Precision, Shunt, 2.048V±0.5%	SOT-23	16dk	RF1	3a	Max
FZEI	-	LM4040DIM3-2.1+T	Vref-IC	µPower, Precision, Shunt, 2.048V±1.0%	SOT-23	16dk	RF1	3a	Max
FZEJ	-	LM4040AIM3-2.5+T	Vref-IC	µPower, Precision, Shunt, 2.50V±0.1%	SOT-23	16dk	RF1	3a	Max
FZEK	-	LM4040BIM3-2.5+T	Vref-IC	µPower, Precision, Shunt, 2.50V±0.2%	SOT-23	16dk	RF1	3a	Max
FZEL	-	LM4040CIM3-2.5+T	Vref-IC	µPower, Precision, Shunt, 2.50V±0.5%	SOT-23	16dk	RF1	3a	Max
FZEM	-	LM4040DIM3-2.5+T	Vref-IC	µPower, Precision, Shunt, 2.50V±1.0%	SOT-23	16dk	RF1	3a	Max
FZEN	-	LM4040AIM3-3.0+T	Vref-IC	µPower, Precision, Shunt, 3.00V±0.1%	SOT-23	16dk	RF1	3a	Max
FZEO	-	LM4040BIM3-3.0+T	Vref-IC	µPower, Precision, Shunt, 3.00V±0.2%	SOT-23	16dk	RF1	3a	Max
FZEP	-	LM4040CIM3-3.0+T	Vref-IC	µPower, Precision, Shunt, 3.00V±0.5%	SOT-23	16dk	RF1	3a	Max
FZEQ	-	LM4040DIM3-3.0+T	Vref-IC	µPower, Precision, Shunt, 3.00V±1.0%	SOT-23	16dk	RF1	3a	Max
FZER	-	LM4040AIM3-4.1+T	Vref-IC	µPower, Precision, Shunt, 4.096V±0.1%	SOT-23	16dk	RF1	3a	Max
FZES	-	LM4040BIM3-4.1+T	Vref-IC	µPower, Precision, Shunt, 4.096V±0.2%	SOT-23	16dk	RF1	3a	Max
FZET	-	LM4040CIM3-4.1+T	Vref-IC	µPower, Precision, Shunt, 4.096V±0.5%	SOT-23	16dk	RF1	3a	Max
FZEU	-	LM4040DIM3-4.1+T	Vref-IC	µPower, Precision, Shunt, 4.096V±1.0%	SOT-23	16dk	RF1	3a	Max
FZEV	-	LM4040AIM3-5.0+T	Vref-IC	µPower, Precision, Shunt, 5.00V±0.1%	SOT-23	16dk	RF1	3a	Max
FZEW	-	LM4040BIM3-5.0+T	Vref-IC	µPower, Precision, Shunt, 5.00V±0.2%	SOT-23	16dk	RF1	3a	Max
FZEX	-	LM4040CIM3-5.0+T	Vref-IC	µPower, Precision, Shunt, 5.00V±0.5%	SOT-23	16dk	RF1	3a	Max
FZEY	-	LM4040DIM3-5.0+T	Vref-IC	µPower, Precision, Shunt, 5.00V±1.0%	SOT-23	16dk	RF1	3a	Max
FZFL	-	MAX6808UR32-T	Vdet-IC	3.2V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Max
FZGH	-	MAX6006AEUR-T	Vref-IC	Shunt, 1.250V±0.2%	SOT-23	16dk	RF1	3a	Max
FZGI	-	MAX6006BEUR-T	Vref-IC	Shunt, 1.250V±0.5%	SOT-23	16dk	RF1	3a	Max
FZGJ	-	MAX6006CEUR-T	Vref-IC	Shunt, 1.250V±1%	SOT-23	16dk	RF1	3a	Max
FZGK	-	MAX6007AEUR-T	Vref-IC	Shunt, 2.480V±0.2%	SOT-23	16dk	RF1	3a	Max
FZGL	-	MAX6007BEUR-T	Vref-IC	Shunt, 2.480V±0.5%	SOT-23	16dk	RF1	3a	Max
FZGM	-	MAX6007CEUR-T	Vref-IC	Shunt, 2.480V±1%	SOT-23	16dk	RF1	3a	Max
FZGN	-	MAX6008AEUR-T	Vref-IC	Shunt, 2.500V±0.2%	SOT-23	16dk	RF1	3a	Max
FZGO	-	MAX6008BEUR-T	Vref-IC	Shunt, 2.500V±0.5%	SOT-23	16dk	RF1	3a	Max
FZGP	-	MAX6008CEUR-T	Vref-IC	Shunt, 2.500V±1%	SOT-23	16dk	RF1	3a	Max
FZGQ	-	MAX6009AEUR-T	Vref-IC	Shunt, 3.00V±0.2%	SOT-23	16dk	RF1	3a	Max
FZGR	-	MAX6009BEUR-T	Vref-IC	Shunt, 3.00V±0.5%	SOT-23	16dk	RF1	3a	Max
FZGS	-	MAX6009CEUR-T	Vref-IC	Shunt, 3.00V±1%	SOT-23	16dk	RF1	3a	Max
FZIE	-	MAX6800UR26D3-T	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD6	3b	Max
FZIF	-	MAX6800UR29D3-T	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD6	3b	Max
FZIG	-	MAX6800UR31D3-T	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD6	3b	Max
FZIH	-	MAX6800UR44D3-T	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD6	3b	Max
FZII	-	MAX6800UR46D3-T	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD6	3b	Max
FZIK	-	MAX6801UR26D3-T	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Max
FZIM	-	MAX6801UR29D3-T	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Max
FZIN	-	MAX6801UR31D3-T	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Max
FZIO	-	MAX6801UR44D3-T	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Max
FZIP	-	MAX6801UR46D3-T	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Max
FZIQ	-	MAX6802UR26D3-T	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD9	3b	Max
FZIR	-	MAX6802UR29D3-T	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdc	VD9	3b	Max
FZIS	-	MAX6802UR31D3-T	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdc	VD9	3b	Max
FZIT	-	MAX6802UR44D3-T	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vdc	VD9	3b	Max
FZIU	-	MAX6802UR46D3-T	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD9	3b	Max
FZIV	-	MXD1810UR46	Vdet-IC	4.6V±2.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Max
FZIW	-	MXD1811UR44	Vdet-IC	4.4V±2.5%, CMOS -Reset ODO	SOT-23	16vda	VD9	3a	Max
FZIX	-	MXD1812UR41	Vdet-IC	4.1V±2.5%, CMOS +PPO +Reset	SOT-23	16vda	VD7	3a	Max
FZIY	-	MXD1813UR46	Vdet-IC	4.6V±2.5%, MR, CMOS -Reset ODO	SOT-23	16vda	VD10	3a	Max
FZIZ	-	MXD1815UR29	Vdet-IC	2.9V±2.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Max
FZJA	-	MXD1816UR22	Vdet-IC	2.2V±2.5%, CMOS -Reset ODO	SOT-23	16vda	VD9	3a	Max
FZJB	-	MXD1817UR31	Vdet-IC	3.1V±2.5%, CMOS +Reset PPO	SOT-23	16vda	VD7	3a	Max
FZJC	-	MXD1818UR26	Vdet-IC	2.6V±2.5%, MR, CMOS +Reset ODO	SOT-23	16vda	VD10	3a	Max
FZJE	-	MXD1818UR22	Vdet-IC	2.2V±2.5%, MR, CMOS +Reset ODO	SOT-23	16vda	VD10	3a	Max
FZKC	-	MXD1810UR41	Vdet-IC	4.1V±2.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Max
FZKD	-	MXD1810UR44	Vdet-IC	4.4V±2.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Max
FZKE	-	MXD1811UR41	Vdet-IC	4.1V±2.5%, CMOS -Reset ODO	SOT-23	16vda	VD9	3a	Max
FZKF	-	MXD1811UR46	Vdet-IC	4.6V±2.5%, CMOS -Reset ODO	SOT-23	16vda	VD9	3a	Max
FZKG	-	MXD1812UR44	Vdet-IC	4.4V±2.5%, CMOS +PPO +Reset	SOT-23	16vda	VD7	3a	Max
FZKH	-	MXD1812UR46	Vdet-IC	4.6V±2.5%, CMOS +PPO +Reset	SOT-23	16vda	VD7	3a	Max
FZKI	-	MXD1813UR41	Vdet-IC	4.1V±2.5%, MR, CMOS -Reset ODO	SOT-23	16vda	VD10	3a	Max
FZKJ	-	MXD1813UR44	Vdet-IC	4.4V±2.5%, MR, CMOS -Reset ODO	SOT-23	16vda	VD10	3a	Max
FZKK	-	MXD1815UR22	Vdet-IC	2.2V±2.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Max

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FZKL	-	MXD1815UR23	Vdet-IC	2.3V±2.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Max
FZKM	-	MXD1815UR26	Vdet-IC	2.6V±2.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Max
FZKN	-	MXD1815UR31	Vdet-IC	3.1V±2.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Max
FZKO	-	MXD1816UR23	Vdet-IC	2.3V±2.5%, CMOS -Reset ODO	SOT-23	16vda	VD9	3a	Max
FZKP	-	MXD1816UR26	Vdet-IC	2.6V±2.5%, CMOS -Reset ODO	SOT-23	16vda	VD9	3a	Max
FZKQ	-	MXD1816UR29	Vdet-IC	2.9V±2.5%, CMOS -Reset ODO	SOT-23	16vda	VD9	3a	Max
FZKR	-	MXD1816UR31	Vdet-IC	3.1V±2.5%, CMOS -Reset ODO	SOT-23	16vda	VD9	3a	Max
FZKS	-	MXD1817UR22	Vdet-IC	2.2V±2.5%, CMOS +Reset PPO	SOT-23	16vda	VD7	3a	Max
FZKT	-	MXD1817UR23	Vdet-IC	2.3V±2.5%, CMOS +Reset PPO	SOT-23	16vda	VD7	3a	Max
FZKU	-	MXD1817UR26	Vdet-IC	2.6V±2.5%, CMOS +Reset PPO	SOT-23	16vda	VD7	3a	Max
FZKV	-	MXD1817UR29	Vdet-IC	2.9V±2.5%, CMOS +Reset PPO	SOT-23	16vda	VD7	3a	Max
FZKW	-	MXD1818UR23	Vdet-IC	2.3V±2.5%, MR, CMOS +Reset ODO	SOT-23	16vda	VD10	3a	Max
FZKX	-	MXD1818UR29	Vdet-IC	2.9V±2.5%, MR, CMOS +Reset ODO	SOT-23	16vda	VD10	3a	Max
FZKY	-	MXD1818UR31	Vdet-IC	3.1V±2.5%, MR, CMOS +Reset ODO	SOT-23	16vda	VD10	3a	Max
FZNC	-	LM4041AEM3-1.2+T	Vref-IC	μPower, Precision, Shunt, 1.225V±0.1%, -40..+125°C	SOT-23	16dk	RF1	3a	Max
FZND	-	LM4041BEM3-1.2+T	Vref-IC	μPower, Precision, Shunt, 1.225V±0.2%, -40..+125°C	SOT-23	16dk	RF1	3a	Max
FZNE	-	LM4041CEM3-1.2+T	Vref-IC	μPower, Precision, Shunt, 1.225V±0.5%, -40..+125°C	SOT-23	16dk	RF1	3a	Max
FZNF	-	LM4041DEM3-1.2+T	Vref-IC	μPower, Precision, Shunt, 1.225V±1%, -40..+125°C	SOT-23	16dk	RF1	3a	Max
FZNG	-	LM4040AEM3-2.1+T	Vref-IC	μPower, Precision, Shunt, 2.048V±0.1%	SOT-23	16dk	RF1	3a	Max
FZNH	-	LM4040BEM3-2.1-T	Vref-IC	μPower, Precision, Shunt, 2.048V±0.2%	SOT-23	16dk	RF1	3a	Max
FZNI	-	LM4040CEM3-2.1-T	Vref-IC	μPower, Precision, Shunt, 2.048V±0.5%	SOT-23	16dk	RF1	3a	Max
FZNJ	-	LM4040DEM3-2.1+T	Vref-IC	μPower, Precision, Shunt, 2.048V±1.0%	SOT-23	16dk	RF1	3a	Max
FZNK	-	LM4040AEM3-2.5+T	Vref-IC	μPower, Precision, Shunt, 2.50V±0.1%	SOT-23	16dk	RF1	3a	Max
FZNL	-	LM4040BEM3-2.5+T	Vref-IC	μPower, Precision, Shunt, 2.50V±0.2%	SOT-23	16dk	RF1	3a	Max
FZNM	-	LM4040CEM3-2.5+T	Vref-IC	μPower, Precision, Shunt, 2.50V±0.5%	SOT-23	16dk	RF1	3a	Max
FZNN	-	LM4040DEM3-2.5+T	Vref-IC	μPower, Precision, Shunt, 2.50V±1.0%	SOT-23	16dk	RF1	3a	Max
FZNO	-	LM4040AEM3-3.0+T	Vref-IC	μPower, Precision, Shunt, 3.00V±0.1%	SOT-23	16dk	RF1	3a	Max
FZNP	-	LM4040BEM3-3.0+T	Vref-IC	μPower, Precision, Shunt, 3.00V±0.2%	SOT-23	16dk	RF1	3a	Max
FZNR	-	LM4040DEM3-3.0+T	Vref-IC	μPower, Precision, Shunt, 3.00V±1.0%	SOT-23	16dk	RF1	3a	Max
FZNS	-	LM4040AEM3-4.1+T	Vref-IC	μPower, Precision, Shunt, 4.096V±0.1%	SOT-23	16dk	RF1	3a	Max
FZNT	-	LM4040BEM3-4.1+T	Vref-IC	μPower, Precision, Shunt, 4.096V±0.2%	SOT-23	16dk	RF1	3a	Max
FZNU	-	LM4040CEM3-4.1+T	Vref-IC	μPower, Precision, Shunt, 4.096V±0.5%	SOT-23	16dk	RF1	3a	Max
FZNV	-	LM4040DEM3-4.1+T	Vref-IC	μPower, Precision, Shunt, 4.096V±1.0%	SOT-23	16dk	RF1	3a	Max
FZNW	-	LM4040AEM3-5.0+T	Vref-IC	μPower, Precision, Shunt, 5.00V±0.1%	SOT-23	16dk	RF1	3a	Max
FZNX	-	LM4040BEM3-5.0+T	Vref-IC	μPower, Precision, Shunt, 5.00V±0.2%	SOT-23	16dk	RF1	3a	Max
FZNY	-	LM4040CEM3-5.0+T	Vref-IC	μPower, Precision, Shunt, 5.00V±0.5%	SOT-23	16dk	RF1	3a	Max
FZNZ	-	LM4040DEM3-5.0+T	Vref-IC	μPower, Precision, Shunt, 5.00V±1.0%	SOT-23	16dk	RF1	3a	Max
FZVZ	-	LM4040CEM3-2.5/V+T	Vref-IC	μPower, Precision, Shunt, 2.50V±0.5%	SOT-23	16dk	RF1	3a	Max
FZWA	-	LM4040DEM3-4.1/V+T	Vref-IC	μPower, Precision, Shunt, 4.096V±1.0%	SOT-23	16dk	RF1	3a	Max
FZWB	-	LM4040AEM3-5.0/V+T	Vref-IC	μPower, Precision, Shunt, 5.00V±0.1%	SOT-23	16dk	RF1	3a	Max
g	-	AX6901GA	Vdet-IC	2.25V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Axl
G	-	CMBT3906E	Si-pnp	GP, 40V, 600mA, 100mW, B=100..100, 250MHz	SOT-923	19ta	-	3k	Cen
G	-	MRF947A	Si-npn	UHF, 20V, 50mA, 188mW, B>50, 8GHz	SOT-323	16ta	-	3a	Mot
G	-	SB007-03Q	Si-diode	SBR, HF, 30V, 70mA, Vf<0.55V(70mA), 3pF, 10ns	MCP	16dc	-	3a	San
G	cr	ELM7528NEB	Vdet-IC	2.8V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
G	cs	ELM7528CEB	Vdet-IC	2.8V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
G0	-	AP8821C-60GC	Vdet-IC	6.0V±2%, -Reset PPO, Halogen-free	SOT-23	16vda	VD7	3bb	Anw
G0	-	AP8821C-60GT	Vdet-IC	6.0V±2%, -Reset PPO, Halogen-free	SC-70	16vda	VD7	3bb	Anw
G0	-	AP8821C-60PC	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23	16vda	VD7	3b	Anw
G0	-	AP8821C-60PT	Vdet-IC	6.0V±2%, -Reset PPO	SC-70	16vda	VD7	3b	Anw
G0	-	ELM7630HBB	Vdet-IC	3.0V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
G0	-	HSMP-3890	PIN-diode	RF, 100V, 1A, 250mW, Rs<2.5Ω, Cd<0.3pF	SOT-23	16dc	-	3a	Agi
G0	-	HSMP-389B	PIN-diode	RF, 100V, 1A, Rs(typ)=2.5Ω, 0.3pF	SOT-323	16dc	-	3a	Agi
G0	-	R3111N602A	Vdet-IC	6V±2%, -Reset PPO	SOT-23	16vdd	VD7	3d	Ric
G0	-	R3113D301C	Vdet-IC	3V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
G0	-	R3130N20EA	Vdet-IC	2V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
G06	-	DTD133HK	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=3k3/10k	SOT-346	16ta	-	3a	Rhm
G0C	-	KIC3201T-60	LVR-IC	LDO, 6.0V±2%, 400mA	TSM	16cg	VR1	3f	Kec
G0G	-	BAS70G-AE3	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns, Halogen Free	SOT-23	16dc	-	3a	Utc
G0G	-	BAS70WG-AL3	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns, Halogen Free	SOT-323	16dc	-	3a	Utc
G0L	-	BAS70L-AE3	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns, Lead Free	SOT-23	16dc	-	3a	Utc
G0L	-	BAS70WL-AL3	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns, Lead Free	SOT-323	16dc	-	3a	Utc
G1	-	ELM7631HBB	Vdet-IC	3.1V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
G1	-	MMBT5551	Si-npn	HV, 180V, 200mA, 350mW, B=80..250, >300MHz	SOT-23	16ta	-	3a	Mot
G1	-	MMBZ5226BW	Z-diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 150mW	SOT-523	16dc	-	3a	Di
G1	-	PBRN113EK	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/1k	SOT-346	16ta	-	3a	Nxp
G1	-	R3113D311C	Vdet-IC	3.1V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
G1	-	R3130N21EA	Vdet-IC	2.1V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
G1	-	RT9166-33CVL	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
G1-	-	RT9166-33PVL	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G11	-	DTB113ZK	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=1k/10k	SOT-346	16ta	-	3a	Rhm
G13	-	2SK1580	n-MOSFET	V-MOS, LogL, 16V, ±0.1A, <10Ω(100mA)	SOT-323	16fh	-	3a	Nec
G14	-	2SK1581	n-MOSFET	V-MOS, LogL, 16V, ±0.2A, <3Ω(100mA)	SOT-23	16fh	-	3a	Nec
G15	-	2SK1582	n-MOSFET	V-MOS, LogL, 30V, ±0.2A, <3Ω(10mA)	SOT-23	16fh	-	3a	Nec
G16	-	2SK1590	n-MOSFET	V-MOS, LogL, 60V, ±0.2A, <3Ω	SOT-23	16fh	-	3a	Nec
G17	-	2SK1589	n-MOSFET	V-MOS, LogL, 100V, ±0.1A, <25Ω	SOT-23	16fh	-	3a	Nec
G17	-	MMBZ4617	Z-diode	2.4V±5%, Izt=250mA, 350mW	SOT-23	16dc	-	3g	Vs
G18	-	2SK1591	n-MOSFET	V-MOS, LogL, 100V, ±0.2A, <6.5Ω	SOT-23	16fh	-	3a	Nec
G18	-	MMBZ4618	Z-diode	2.7V±5%, Izt=250mA, 350mW	SOT-23	16dc	-	3g	Vs
G19	-	MMBZ4619	Z-diode	3.0V±5%, Izt=250mA, 350mW	SOT-23	16dc	-	3g	Vs
G1F	-	2SC2412K-Q	Si-npn	Sw, 60V, 150mA, 200mW, 180MHz, B=120..270	SOT-23	16ta	-	3a	Wtr
G1F	-	BC847B	Si-npn	GP, 50V, 100mA, 200mW, B=200..450, 200MHz	SOT-23	16ta	-	3a	Rhm
G1F	-	L2SC2412KSLT1	Si-npn	GP, 50V, 150mA, 200mW, 180MHz, B=270..560	SOT-23	16ta	-	3a	Lrc
G1K	-	BC848BW	Si-npn	GP, 30V, 100mA, 310mW, B=200..450, >300MHz	SOT-323	16ta	-	3a	Rhm
G1p	-	BFS20	Si-npn	RF, 30V, 25mA, 250mW, B=85, 450MHz	SOT-23	16ta	-	3a	PhH
G1t	-	BFS20	Si-npn	RF, 30V, 25mA, 250mW, B=85, 450MHz	SOT-23	16ta	-	3a	PhM
G1W	-	BFS20	Si-npn	RF, 30V, 25mA, 250mW, B=85, 450MHz	SOT-23	16ta	-	3a	PhC
G2	-	BF599	Si-npn	VHF, IF, 40V, 25mA, 200mW, B>40, 550MHz	SOT-23	16ta	-	3a	Kec
G2	-	ELM7632HBB	Vdet-IC	3.2V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
G2	-	HSMP-389C	PIN-diode	Dual, RF, 100V, 1A, Rs(typ)=2.5Ω, 0.3pF	SOT-323	16dg	-	3a	Agi
G2	-	MMBZ5227BW	Z-diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 150mW	SOT-523	16dc	-	3a	Di
G2	-	R3113D321C	Vdet-IC	3.2V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
G2	-	R3130N22EA	Vdet-IC	2.2V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
G2	-	RT9166-12CVL	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
G2-	-	RT9166-12PVL	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
G2=	-	RT9166-12GVL	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
G20	-	MMBZ4620	Z-diode	3.3V±5%, Izt=250mA, 350mW	SOT-23	16dc	-	3g	Vs
G21	-	2SK1958	n-MOSFET	V-MOS, LogL, 16V, ±0.1A, <12Ω(10mA)	SOT-323	16fh	-	3a	Nec
G21	-	MMBZ4621	Z-diode	3.6V±5%, Izt=250mA, 350mW	SOT-23	16dc	-	3g	Vs
G22	-	2SK2090	n-MOSFET	V-MOS, LogL, 50V, ±100mA, <20Ω(10mA)	SOT-323	16fh	-	3a	Nec
G22	-	DMN2075U	n-MOSFET	Sw, 20V, 4.2A, 800mW, 38mΩ(3.6A), 7.4/28.1ns	SOT-23	16fh	-	3c	Di
G22	-	MMBZ4622	Z-diode	3.9V±5%, Izt=250mA, 350mW	SOT-23	16dc	-	3g	Vs
G23	-	2SK2158	n-MOSFET	V-MOS, LogL, 50V, ±100mA, <15Ω(10mA)	SOT-23	16fh	-	3a	Nec
G23	-	MMBZ4623	Z-diode	4.3V±5%, Izt=250mA, 350mW	SOT-23	16dc	-	3g	Vs
G24	-	2SK2858	n-MOSFET	V-MOS, LogL, 30V, 0.1A, <15Ω	SOT-323	16fh	-	3a	Nec
G24	-	GS809C21EU	Vdet-IC	2.1V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
G24	-	GS809C24EU	Vdet-IC	2.4V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
G24	-	MMBZ4624	Z-diode	4.7V±5%, Izt=250mA, 350mW	SOT-23	16dc	-	3g	Vs
G25	-	2SK3054	n-MOSFET	V-MOS, LogL, 50V, ±0.1A, <40Ω(10mA)	SOT-323	16fh	-	3a	Nec
G25	-	MMBZ4625	Z-diode	5.1V±5%, Izt=250mA, 350mW	SOT-23	16dc	-	3g	Vs
G26	-	GS809CREU	Vdet-IC	2.63V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
G26	-	MMBZ4626	Z-diode	5.6V±5%, Izt=250mA, 350mW	SOT-23	16dc	-	3g	Vs
G27	-	GS809C27SEU	Vdet-IC	2.7V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
G27	-	MMBZ4627	Z-diode	6.2V±5%, Izt=250mA, 350mW	SOT-23	16dc	-	3g	Vs
G29	-	GS809CSEU	Vdet-IC	2.93V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
G2F	-	2SC2412K-R	Si-npn	Sw, 60V, 150mA, 200mW, 180MHz, B=180..390	SOT-23	16ta	-	3a	Wtr
G3	-	1SS196	Si-diode	Sw, U-Fast, 85V, 100mA, 150mW, Vf<1.2V(100mA), <4ns	SC-59	16dr	-	3a	Tos
G3	-	2SA1257-3	Si-pnp	AF-Drv, 180V, 80mA, 200mW, 130MHz, B=60..120	SOT-23	16ta	-	3a	San
G3	-	2SC2107-3	Si-npn	GP, 60V, 100mA, 150mW, B=80..130, 300MHz	SOT-23	16ta	-	3a	Nec
G3	-	BAR63	PIN-diode	RF, 50V, 100mA, Vf(If=100mA)<1.2V, Ir<0.05µA, Cd<0.3pF	SOT-23	16dc	-	3a	Sie
G3	-	ELM7633HBB	Vdet-IC	3.3V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
G3	-	HSMP-389E	PIN-diode	Dual, RF, 100V, 1A, Rs(typ)=2.5Ω, 0.3pF	SOT-323	16df	-	3a	Agi
G3	-	MMBZ5228BW	Z-diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 150mW	SOT-523	16dc	-	3a	Di
G3	-	PBRN123EK	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/2.2k	SOT-346	16ta	-	3a	Nxp
G3	-	R3113D331C	Vdet-IC	3.3V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
G3	-	R3130N23EA	Vdet-IC	2.3V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
G3	-	RT9166-15CVL	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
-G3	-	PMST5551	Si-npn	HV, 180V, 300mA, 200mW, B=80..250, 100..300MHz	SOT-323	16ta	-	3a	PhH
G3-	-	RT9166-15PVL	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
G30	-	GS809CTEU	Vdet-IC	3.08V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
G3C	-	DTB122JK	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=220/470R	SOT-346	16ta	-	3a	Rhm
G3F	-	2SA1037AK-S	Si-pnp	AF, 60V, 150mA, 200mW, B=270..560, >140MHz	SC-59	16ta	-	3a	Wtr
G3F	-	2SC2412K-S	Si-npn	Sw, 60V, 150mA, 200mW, 180MHz, B=270..560	SOT-23	16ta	-	3a	Wtr
G3K	-	BC858BW	Si-pnp	GP, 30V, 100mA, 250mW, B=220..475, >100MHz	UMT3	16ta	-	3a	Rhm
G4	-	2SA1257-4	Si-pnp	AF-Drv, 180V, 80mA, 200mW, 130MHz, B=90..180	SOT-23	16ta	-	3a	San
G4	-	2SC2107-4	Si-npn	GP, 60V, 100mA, 150mW, B=110..170, 300MHz	SOT-23	16ta	-	3a	Nec
G4	-	BAR63	PIN-diode	RF, 50V, 100mA, Vf(If=100mA)<1.2V, Ir<0.05µA, Cd<0.3pF	SOT-23	16dc	-	3a	Sie
G4	-	BFS20R	Si-npn	RF, 30V, 25mA, 250mW, B=85, 450MHz	SOT-23	16ta	-	3a	Zx
G4	-	ELM7634HBB	Vdet-IC	3.4V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
G4	-	HSMP-389F	PIN-diode	Dual, RF, 100V, 1A, Rs(typ)=2.5Ω, 0.3pF	SOT-323	16dg	-	3a	Agi

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G4	-	KA4A3Q	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=1k/10k	SOT-416	16ta	-	3a	Nec
G4	-	MMBZ5229BW	Z-diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 150mW	SOT-523	16dc	-	3a	Di
G4	-	R3113D341C	Vdet-IC	3.4V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
G4	-	R3130N24EA	Vdet-IC	2.4V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
G4	-	RT9166-18CVL	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
G4-	-	RT9166-18PVL	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
G4=	-	RT9166-18GVL	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
G40	-	GS809CJEU	Vdet-IC	4.0V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
G43	-	GS809CMEU	Vdet-IC	4.38V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
G46	-	GS809CLEU	Vdet-IC	4.63V±1.5%, -Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
G4C	-	DTD122JK	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=220R/470R	SOT-346	16ta	-	3a	Rhm
G4s	-	BAR63-04	PIN-diode	Dual, Sw, RF, 100V, 100mA, Vf<1.1V(50mA), < 0.3pF	SOT-23	16dl	-	3c	Inf
G4s	-	BAR63-04W	PIN-diode	Dual, Sw, RF, 100V, 100mA, Vf<1.1V(50mA), < 0.3pF	SOT-323	16dl	-	3c	Inf
G5	-	2SA1257-5	Si-pnp	AF-Drv, 180V, 80mA, 200mW, 130MHz, B=135..270	SOT-23	16ta	-	3a	San
G5	-	2SC2107-5	Si-npn	GP, 60V, 100mA, 150mW, B=150..240, 300MHz	SOT-23	16ta	-	3a	Nec
G5	-	BF550R	Si-pnp	HF/AF, 40V, 25mA, 200mW, B=50..125, 350MHz	SOT-23	16te	-	3a	Sil
G5	-	ELM7635HBB	Vdet-IC	3.5V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
G5	-	MMBZ5230BW	Z-diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 150mW	SOT-523	16dc	-	3a	Di
G5	-	PBRN113ZK	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/10k	SOT-346	16ta	-	3a	Nxp
G5	-	R3113D351C	Vdet-IC	3.5V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
G5	-	R3130N25EA	Vdet-IC	2.5V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
G5	-	RT9166-25CVL	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
G5	-	SP810EK-3-1	Vdet-IC	3.1V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Sip
G5-	-	RT9166-25PVL	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
G50	-	BZX84C2V4-V-G	Z-diode	2.2..2.6V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G51	-	BZX84C2V7-V-G	Z-diode	2.5..2.9V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G52	-	BZX84C3V0-V-G	Z-diode	2.8..3.2V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G53	-	BZX84C3V3-V-G	Z-diode	3.1..3.5V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G54	-	BZX84C3V6-V-G	Z-diode	3.4..3.8V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G55	-	BZX84C3V9-V-G	Z-diode	3.7..4.1V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G56	-	BZX84C4V3-V-G	Z-diode	4.0..4.6V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G57	-	BZX84C4V7-V-G	Z-diode	4.4..5.0V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G58	-	BZX84C5V1-V-G	Z-diode	4.8..5.4V, Zzt=60Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G59	-	BZX84C5V6-V-G	Z-diode	5.2..6.0V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G5B	-	BC807-25	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=160..400	SOT-23	16ta	-	3a	Rhm
G5s	-	BAR63-05	PIN-diode	Dual, Sw, RF, 100V, 100mA, Vf<1.1V(50mA), < 0.3pF	SOT-23	16dg	-	3c	Inf
G5s	-	BAR63-05W	PIN-diode	Dual, Sw, RF, 100V, 100mA, Vf<1.1V(50mA), < 0.3pF	SOT-323	16dg	-	3c	Inf
G6	-	2SC2107-6	Si-npn	GP, 60V, 100mA, 150mW, B=200..320, 300MHz	SOT-23	16ta	-	3a	Nec
G6	-	BF569	Si-pnp	UHF-Mix/Osc, 40V, 30mA, 200mW, B=25..90, 1GHz	SOT-23	16ta	-	3a	Zx
G6	-	ELM7636HBB	Vdet-IC	3.6V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
G6	-	R3113D361C	Vdet-IC	3.6V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
G6	-	R3130N26EA	Vdet-IC	2.6V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
G6	-	RT9166-30CVL	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
G6-	-	RT9166-30PVL	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
G60	-	BZX84C6V2-V-G	Z-diode	5.8..6.6V, Zzt=10Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G61	-	BF569R	Si-pnp	UHF-Mix/Osc, 40V, 30mA, 200mW, B=25..90, 1GHz	SOT-23	16te	-	3a	Zx
G61	-	BZX84C6V8-V-G	Z-diode	6.4..7.2V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G62	-	BZX84C7V5-V-G	Z-diode	7.0..7.9V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G63	-	BZX84C8V2-V-G	Z-diode	7.7..8.7V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G64	-	BZX84C9V1-V-G	Z-diode	8.5..9.6V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G65	-	BZX84C10-V-G	Z-diode	9.4..10.6V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G66	-	BZX84C11-V-G	Z-diode	10.4..11.6V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G67	-	BZX84C12-V-G	Z-diode	11.4..12.7V, Zzt=25Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G68	-	BZX84C13-V-G	Z-diode	12.4..14.1V, Zzt=30Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G69	-	BZX84C15-V-G	Z-diode	13.8..15.6V, Zzt=30Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G6s	-	BAR63-06	PIN-diode	Dual, Sw, RF, 100V, 100mA, Vf<1.1V(50mA), < 0.3pF	SOT-23	16df	-	3c	Inf
G6s	-	BAR63-06W	PIN-diode	Dual, Sw, RF, 100V, 100mA, Vf<1.1V(50mA), < 0.3pF	SOT-323	16df	-	3c	Inf
G7	-	BF579	Si-pnp	VHF/UHF, 20V, 25mA, 200mW, B=20..90, 1.75GHz	SOT-23	16ta	-	3a	Sil
G7	-	ELM7637HBB	Vdet-IC	3.7V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
G7	-	KN4A3Q	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1/R2=1k/10k	SOT-416	16ta	-	3a	Nec
G7	-	PBRN123YK	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/10k	SOT-346	16ta	-	3a	Nxp
G7	-	R3113D371C	Vdet-IC	3.7V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
G7	-	R3130N27EA	Vdet-IC	2.7V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
G7	-	RT9166A-28CVL	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-23	16cg	VR1	3a	Rct
G70	-	BZX84C16-V-G	Z-diode	15.3..17.1V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G71	-	BZX84C18-V-G	Z-diode	16.8..19.1V, Zzt=45Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G72	-	BZX84C20-V-G	Z-diode	18.8..21.2V, Zzt=55Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G73	-	BZX84C22-V-G	Z-diode	20.8..23.3V, Zzt=55Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G74	-	BZX84C24-V-G	Z-diode	22.8..25.6V, Zzt=70Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G75	-	BZX84C27-V-G	Z-diode	25.1..28.9V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G76	-	BZX84C30-V-G	Z-diode	28..32V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G77	-	BZX84C33-V-G	Z-diode	31..35V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G78	-	BZX84C36-V-G	Z-diode	34..38V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G79	-	BZX84C39-V-G	Z-diode	37..41V, Zzt=130Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G8	-	BF660	Si-pnp	VHF-Osc, 40V, 25mA, 650MHz	SOT-23	16ta	-	3a	Sil
G8	-	ELM7638HBB	Vdet-IC	3.8V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
G8	-	R3113D381C	Vdet-IC	3.8V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
G8	-	R3130N28EA	Vdet-IC	2.8V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
G8	-	RT9166-28CVL	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
G8-	-	RT9166-28PVL	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
G80	-	BZX84C43-V-G	Z-diode	40..46V, Zzt=150Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G81	-	BZX84C47-V-G	Z-diode	44..50V, Zzt=170Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G82	-	BZX84C51-V-G	Z-diode	48..54V, Zzt=180Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G83	-	BZX84C56-V-G	Z-diode	52..60V, Zzt=200Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G84	-	BZX84C62-V-G	Z-diode	58..66V, Zzt=215Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G85	-	BZX84C68-V-G	Z-diode	64..72V, Zzt=240Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3b	Vs
G86	-	BZX84C75-V-G	Z-diode	70.79V, Zzt=255Ω, Izt=2mA, 300mW	SOT-23	16dc	-	3b	Vs
G9	-	BF767	Si-pnp	VHF/UHF-LN, 950MHz	SOT-23	16ta	-	3a	Phi
G9	-	ELM7639HBB	Vdet-IC	3.9V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
G9	-	R3113D391C	Vdet-IC	3.9V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
G9	-	R3130N29EA	Vdet-IC	2.9V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
G9	-	RT9166-21CVL	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
G9-	-	RT9166-21PVL	LVR-IC	LDO, 21.V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
G98	-	DTB133HKA	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=3k3/10k	SOT-346	16ta	-	3a	Rhm
gA	-	BU45L272G	Vdet-IC	2.7V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Ga	-	BD48L31G	Vdet-IC	3.1V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
GA	-	2SA1995FV-A	Si-pnp	GP, Sw, 15V, 400mA, 150mW, B=300..600, 130MHz	SOT-723	18ta	-	3a	Tos
GA	-	2SC4922	Si-npn-Digi	Mute, Drv, 25V, 100mA, 150mW, 240MHz, R1/R2=47k/47k	SMCP	16ta	-	3a	San
GA	-	ELM7630LDB	Vdet-IC	3.0V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
GA	-	HSMP-4890	PIN-diode	RF, 100V, 1A, 250mW, Rs<2.5Ω, Cd<0.375pF	SOT-23	16dh	-	3a	Agi
GA	-	KRA151F	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1/R2=4.7k/4.7k	TFSM	19ta	-	3k	Kec
GA	-	PDTA123TK	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=2.2k	SOT-346	16ta	-	3a	Nxp
GA	-	RT9166-35CVL	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
GA-	-	RT9166-35PVL	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
GAB	-	BCW60B	Si-npn	GP, 32V, 200mA, 250mW, B=150..310, 250MHz	SOT-23	16ta	-	3a	Rhm
GAC	-	BCW60C	Si-npn	GP, 32V, 200mA, 250mW, B=250..480, 250MHz	SOT-23	16ta	-	3a	Rhm
GAD	-	BCW60D	Si-npn	GP, 32V, 200mA, 250mW, B=380..630, 250MHz	SOT-23	16ta	-	3a	Rhm
GAG	-	BAS70AG-AE3	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns, Halogen Free	SOT-23	16df	-	3a	Utc
GAG	-	BAS70AWG-AL3	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns, Halogen Free	SOT-323	16df	-	3a	Utc
GAH	-	BCX70H	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=180..310, >100MHz	SOT-23	16ta	-	3a	Rhm
GAL	-	BAS70AL-AE3	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns, Lead Free	SOT-23	16df	-	3a	Utc
GAL	-	BAS70AWL-AL3	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns, Lead Free	SOT-323	16df	-	3a	Utc
gB	-	BU45L282G	Vdet-IC	2.8V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Gb	-	BD48L32G	Vdet-IC	3.2V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
GB	-	2SA1995FV-B	Si-pnp	GP, Sw, 15V, 400mA, 150mW, B=000..1000, 130MHz	SOT-723	18ta	-	3a	Tos
GB	-	ELM7631LDB	Vdet-IC	3.1V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
GB	-	KRA152F	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1/R2=10k/10k	TFSM	19ta	-	3k	Kec
GB	-	PDTC123TK	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=2.2k	SC-59	16ta	-	3a	Nxp
GB	-	RT9166A-25CVL	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-23	16cg	VR1	3a	Rct
GB	-	SiP810CJEUDT	Vdet-IC	4.0V±1.5%, +Reset PPO 210ms	SOT-23	16vdc	VD7	3g	Vs
gC	-	BU45L292G	Vdet-IC	2.9V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Gc	-	BD48L33G	Vdet-IC	3.3V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
GC	-	2SC2734	Si-npn	UHF-conv/osc, 20V, 50mA, 150mW, B=20..200, 3.5GHz	SOT-23	16ta	-	3a	Ren
GC	-	2SC4264	Si-npn	VHF/UHF, 20V, 50mA, 100mW, B=20..200, >1.4GHz	CMPAK	16ta	-	3a	Ren
GC	-	ELM7632LDB	Vdet-IC	3.2V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
GC	-	KRA153F	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1/R2=22k/22k	TFSM	19ta	-	3k	Kec
GC	-	SiP810CMEUDT	Vdet-IC	4.38V±1.5%, +Reset PPO 210ms	SOT-23	16vdc	VD7	3g	Vs
GC-	-	RT9166-31PVL	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
GCG	-	BAS70CG-AE3	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns, Halogen Free	SOT-23	16dg	-	3a	Utc
GCG	-	BAS70CWG-AL3	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns, Halogen Free	SOT-323	16dg	-	3a	Utc
GCL	-	BAS70CL-AE3	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns, Lead Free	SOT-23	16dg	-	3a	Utc
GCL	-	BAS70CWL-AL3	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns, Lead Free	SOT-323	16dg	-	3a	Utc
gD	-	BU45L302G	Vdet-IC	3.0V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Gd	-	BD48L34G	Vdet-IC	3.4V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
GD	-	ELM7633LDB	Vdet-IC	3.3V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
GD	-	KRA154F	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1/R2=47k/47k	TFSM	19ta	-	3k	Kec
GD	-	SiP810CLEUDT	Vdet-IC	4.63V±1.5%, +Reset PPO 210ms	SOT-23	16vdc	VD7	3g	Vs
GD-	-	RT9808-18PV	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Rct
GD08G	-	AIC1748-08GU3	LVR-IC	LDO, 0.8V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD09G	-	AIC1748-09GU3	LVR-IC	LDO, 0.9V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GD10G	-	AIC1748-10GU3	LVR-IC	LDO, 1.0V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD11G	-	AIC1748-11GU3	LVR-IC	LDO, 1.1V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD12G	-	AIC1748-12GU3	LVR-IC	LDO, 1.2V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD13G	-	AIC1748-13GU3	LVR-IC	LDO, 1.3V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD14G	-	AIC1748-14GU3	LVR-IC	LDO, 1.4V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD15G	-	AIC1748-15GU3	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD16G	-	AIC1748-16GU3	LVR-IC	LDO, 1.6V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD17G	-	AIC1748-17GU3	LVR-IC	LDO, 1.7V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD18G	-	AIC1748-18GU3	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD19G	-	AIC1748-19GU3	LVR-IC	LDO, 1.9V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD20G	-	AIC1748-20GU3	LVR-IC	LDO, 2.0V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD21G	-	AIC1748-21GU3	LVR-IC	LDO, 2.1V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD22G	-	AIC1748-22GU3	LVR-IC	LDO, 2.2V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD23G	-	AIC1748-23GU3	LVR-IC	LDO, 2.3V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD24G	-	AIC1748-24GU3	LVR-IC	LDO, 2.4V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD25G	-	AIC1748-25GU3	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD26G	-	AIC1748-26GU3	LVR-IC	LDO, 2.6V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD27G	-	AIC1748-27GU3	LVR-IC	LDO, 2.7V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD28G	-	AIC1748-28GU3	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD29G	-	AIC1748-29GU3	LVR-IC	LDO, 2.9V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD2JG	-	AIC1748-285GU3	LVR-IC	LDO, 2.85V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD30G	-	AIC1748-30GU3	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD31G	-	AIC1748-31GU3	LVR-IC	LDO, 3.1V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD32G	-	AIC1748-32GU3	LVR-IC	LDO, 3.2V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GD33G	-	AIC1748-33GU3	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-23	16cg	VR1	3a	Aic
GDE	-	SMPC5.0A	TVS	Vbr=6.40..7.07V, Vrwm=5.0V, Ipp=150.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GDG	-	SMPC6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, Ipp=145.6A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GDK	-	SMPC6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, Ipp=133.9A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GDM	-	SMPC7.0A	TVS	Vbr=7.78..8.60V, Vrwm=7.0V, Ipp=125.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GDP	-	SMPC7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, Ipp=116.3A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GDR	-	SMPC8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, Ipp=110.3A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GDT	-	SMPC8.5A	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, Ipp=104.2A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GDV	-	SMPC9.0A	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, Ipp=97.4A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GDX	-	SMPC10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, Ipp=88.2A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GDZ	-	SMPC11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, Ipp=82.4A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
gE	-	BU45L312G	Vdet-IC	3.1V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Ge	-	BD48L35G	Vdet-IC	3.5V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
GE	-	2SA1455K-E	Si-pnp	AF, 50V, 150mA, 200mW, B=390..820, >140MHz	SOT-346	16ta	-	3a	Rhm
GE	-	ELM7634LDB	Vdet-IC	3.4V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
GE-	-	RT9198-18PV	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-23	16cg	VR1	3a	Rct
GE=	-	RT9198-18GV	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-23	16cg	VR1	3a	Rct
GEA	-	CHDTC144GEPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R2=47k	SOT-416	16ta	-	3a	Chm
GEE	-	SMPC12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, Ipp=75.4A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GEG	-	SMPC13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, Ipp=69.8A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GEK	-	SMPC14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, Ipp=64.7A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GEM	-	SMPC15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, Ipp=61.5A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GEP	-	SMPC16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, Ipp=57.7A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GER	-	SMPC17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, Ipp=54.3A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GEs	-	BFR35AP	Si-npn	VHF.UHF, 20V, 30mA, 280mW, B=40..200, 5GHz	SOT-23	16ta	-	3a	Sie
GEs	-	BFR35AP	Si-npn	RF, 20V, 45mA, 280mW, 5GHz, B=70..140	SOT-23	16ta	-	3c	Inf
GET	-	SMPC18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, Ipp=51.4A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GEV	-	SMPC20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, Ipp=46.3A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GEX	-	SMPC22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, Ipp=42.3A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GEZ	-	SMPC24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, Ipp=38.6A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
gF	-	BU45L322G	Vdet-IC	3.2V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Gf	-	BD48L36G	Vdet-IC	3.6V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
GF	-	BFN22	Si-npn	Vid, 250V, 20..50mA, >60MHz	SOT-23	16ta	-	3a	Ste
GF	-	ELM7635LDB	Vdet-IC	3.5V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
GF-	-	RT9198-25PV	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-23	16cg	VR1	3a	Rct
GF1	-	AP2121N-1.5TRG1	LVR-IC	LDO, 1.5V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
GF3	-	AP2121N-1.8TRG1	LVR-IC	LDO, 1.8V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
GF4	-	AP2121N-2.5TRG1	LVR-IC	LDO, 2.5V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
GF5	-	AP2121N-2.8TRG1	LVR-IC	LDO, 2.8V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
GF6	-	AP2121N-3.0TRG1	LVR-IC	LDO, 3.0V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
GF7	-	AP2121N-3.2TRG1	LVR-IC	LDO, 3.2V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
GF8	-	AP2121N-3.3TRG1	LVR-IC	LDO, 3.3V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
GF9	-	AP2121N-1.2TRG1	LVR-IC	LDO, 1.2V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
GFE	-	SMPC26A	TVS	Vbr=28.9..31.0V, Vrwm=26V, Ipp=35.6A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GFG	-	SMPC28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, Ipp=33.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GFK	-	SMPC30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, Ipp=31.0A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GFM	-	SMPC33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, Ipp=28.1A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GFP	-	SMPC36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, Ipp=25.8A, 1500W(1ms)	TO-277A	76bd	-	3o	Vs
GFs	-	BFR92P	Si-npn	UHF-A-Band, 20V, 25mA, 300mW, B>40, >5GHz	SOT-23	16ta	-	3a	Sie
gG	-	BU45L332G	Vdet-IC	3.3V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Gg	-	BD48L37G	Vdet-IC	3.7V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
GG	-	BF579R	Si-pnp	VHF/UHF, 20V, 25mA, 200mW, B=20..90, 1.75GHz	SOT-23	16te	-	3g	Vs
GG	-	BFR93P	Si-npn	UHF-A-Band, 15V, 30mA, 300mW, B>40, >5GHz	SOT-23	16ta	-	3a	Sie
GG	-	ELM7636LDB	Vdet-IC	3.6V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
GG	-	KRA157F	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1/R2=10/47k	TFSM	19ta	-	3k	Kec
GG-	-	RT9198-30PV	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-23	16cg	VR1	3a	Rct
GG=	-	RT9198-30GV	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-23	16cg	VR1	3a	Rct
GG9	-	AP2121N-1.3TRG1	LVR-IC	LDO, 1.3V±2%, 200mA	SOT-23	16cg	VR1	3b	Bcd
gH	-	BU45L342G	Vdet-IC	3.4V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Gh	-	BD48L38G	Vdet-IC	3.8V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
GH	-	ELM7637LDB	Vdet-IC	3.7V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
GH	-	KRA158F	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1/R2=22k/47k	TFSM	19ta	-	3k	Kec
GH-	-	RT9198-33PV	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-23	16cg	VR1	3a	Rct
GH1	-	AZ809ANSTR-G1	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Bcd
GH1	-	BCW69	Si-pnp	GP, 50V, 100mA, 330mW, B=120..260, >150MHz	SOT-23	16ta	-	3a	Rhm
GH2	-	BCW70	Si-pnp	GP, 50V, 100mA, 330mW, B=215..500, >150MHz	SOT-23	16ta	-	3a	Rhm
GH6	-	AZ809ANRTR-G1	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Bcd
GH7	-	AZ809ANLTR-G1	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Bcd
GJ	-	ELM7638LDB	Vdet-IC	3.8V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
GJ	-	KRA159F	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1/R2=47k/22k	TFSM	19ta	-	3k	Kec
GJ=	-	RT9198-15GV	LVR-IC	LDO, 1.5V±1%, 300mA	SOT-23	16cg	VR1	3a	Rct
GJ2	-	2SK968-2	n-FET	FM, 20V, 20mA, 200mW, Idss=0.6..1.5mA, Up<2.5V	SOT-23	16fa	-	3a	San
GJ3	-	2SK968-3	n-FET	FM, 20V, 20mA, 200mW, Idss=1.2..3mA, Up<2.5V	SOT-23	16fa	-	3a	San
GJ4	-	2SK968-4	n-FET	FM, 20V, 20mA, 200mW, Idss=2.5..4mA, Up<2.5V	SOT-23	16fa	-	3a	San
GJ5	-	2SK968-5	n-FET	FM, 20V, 20mA, 200mW, Idss=5..12mA, Up<2.5V	SOT-23	16fa	-	3a	San
gK	-	BU45L352G	Vdet-IC	3.5V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Gk	-	BD48L39G	Vdet-IC	3.9V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
GK	-	2SK2969	n-MOSFET	V-MOS, LogL, 30V, 0.8A, <0.52Ω, 20/50ns	SOT-23	16fh	-	3a	San
GK	-	ELM7639LDB	Vdet-IC	3.9V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
GK	-	KRA160F	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1=4.7k	TFSM	19ta	-	3k	Kec
GK-	-	RT9198-28PV	LVR-IC	LDO, 2.8V±1%, 300mA	SOT-23	16cg	VR1	3a	Rct
GK1	-	BCW71	Si-npn	AF, 50V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	Rhm
GK1	-	CHDTA114GKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R2=10k	SOT-23	16ta	-	3a	Chm
GK2	-	BCW72	Si-npn	AF, 50V, 100mA, 250mW, >100MHz, B=200..450	SOT-23	16ta	-	3a	Rhm
GK2	-	CHDTA124GKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R2=22k	SOT-23	16ta	-	3a	Chm
GK3	-	CHDTA144GKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R2=47k	SOT-23	16ta	-	3a	Chm
GK4	-	CHDTA115GKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R2=100k	SOT-23	16ta	-	3a	Chm
GKA	-	CHDTC114GKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R2=10k	SOT-23	16ta	-	3a	Chm
GKB	-	CHDTC124GKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R2=22k	SOT-23	16ta	-	3a	Chm
GKC	-	CHDTC144GKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R2=47k	SOT-23	16ta	-	3a	Chm
GKD	-	CHDTC115GKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R2=100k	SOT-23	16ta	-	3a	Chm
GKE	-	CHDTD114GKPT	Si-npn-Digi	Sw, 50V, 500mA, 250MHz, R2=10k	SOT-23	16ta	-	3a	Chm
GL	-	2SA1496	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, B>100, R1=10k	CP	16ta	-	3a	San
GL	-	KRA161F	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1=10k	TFSM	19ta	-	3k	Kec
GL	-	RT9166A-15CVL	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-23	16cg	VR1	3a	Rct
GLP	-	MMBT1010	Si-npn	Lo-sat, 45V, 100mA, 225mW, B=300..600	SOT-23	16ta	-	3a	Mot
GLP	-	MSD1010	Si-npn	Lo-sat, 45V, 100mA, 225mW, B=300..600	SC-59	16ta	-	3a	Mot
gM	-	BU45L362G	Vdet-IC	3.6V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Gm	-	BD48L40G	Vdet-IC	4.0V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
GM	-	RT9166A-33CVL	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-23	16cg	VR1	3a	Rct
GM-	-	RT9166A-33PVL	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-23	16cg	VR1	3a	Rct
GMA	-	BFS17	Si-npn	VHF/UHF, Mix/Osc, 25V, 25mA, 300mW, B=90, 1GHz	SOT-23	16ta	-	3a	Rhm
gN	-	BU45L372G	Vdet-IC	3.7V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Gn	-	BD48L41G	Vdet-IC	4.1V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
GN	-	2SC5489	Si-npn	VHF/UHF LN, 16V, 50mA, 100mW, B=90..200, 9GHz	SSFP	18ta	-	3a	San
GN	-	KRA163F	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1=22k	TFSM	19ta	-	3k	Kec
GN3	-	2SC4867-3	Si-npn	VHF/UHF-Amp, 16V, 50mA, 200mW, B=60..120, 9GHz	MCP	16ta	-	3a	San
GN3	-	2SC4868-3	Si-npn	VHF/UHF-Amp, 16V, 50mA, 200mW, B=60..120, 9GHz	SOT-23	16ta	-	3a	San
GN4	-	2SC4867-4	Si-npn	VHF/UHF-Amp, 16V, 50mA, 200mW, B=90..180, 9GHz	MCP	16ta	-	3a	San
GN4	-	2SC4868-4	Si-npn	VHF/UHF-Amp, 16V, 50mA, 200mW, B=90..180, 9GHz	SOT-23	16ta	-	3a	San
GN5	-	2SC4867-5	Si-npn	VHF/UHF-Amp, 16V, 50mA, 200mW, B=130..270, 9GHz	MCP	16ta	-	3a	San
GN5	-	2SC4868-5	Si-npn	VHF/UHF-Amp, 16V, 50mA, 200mW, B=130..270, 9GHz	SOT-23	16ta	-	3a	San
GO	-	2SC2996-O	Si-npn	FM/AM RF, 40V, 50mA, 150mW, B=40..80, 350MHz	SOT-23	16ta	-	3a	Tos
GO	-	AP130-15R	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
gP	-	BU45L382G	Vdet-IC	3.8V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Gp	-	BD48L42G	Vdet-IC	4.2V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GP	-	AP130-16R	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
GP	-	KRA164F	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1=47k	TFSM	19ta	-	3k	Kec
GQ	-	AP130-17R	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
gR	-	BU45L392G	Vdet-IC	3.9V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Gr	-	BD48L43G	Vdet-IC	4.3V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
GR	-	2SA1455K-R	Si-pnp	AF, 50V, 150mA, 200mW, B=180..390, >140MHz	SOT-346	16ta	-	3a	Rhm
GR	-	2SC2996-R	Si-npn	FM/AM RF, 40V, 50mA, 150mW, B=70..140, 350MHz	SOT-23	16ta	-	3a	Tos
GR	-	AP130-18R	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
GR	-	RT9166A-13CVL	LVR-IC	LDO, 1.3V±2%, 600mA	SOT-23	16cg	VR1	3a	Rct
gS	-	BU45L402G	Vdet-IC	4.0V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
GS	-	2SA1455K-S	Si-pnp	AF, 50V, 150mA, 200mW, B=270..560, >140MHz	SOT-346	16ta	-	3a	Rhm
GS	-	AP130-19R	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
GS-	-	RT9818C-21PV	Vdet-IC	2.1V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
GS5	-	2SA1781-5	Si-pnp	GP, 55V, 150mA, 200mW, 180MHz, B=135..270	CP	16ta	-	3a	San
GS6	-	2SA1781-6	Si-pnp	GP, 55V, 150mA, 200mW, 180MHz, B=200..400	CP	16ta	-	3a	San
GS7	-	2SA1781-7	Si-pnp	GP, 55V, 150mA, 200mW, 180MHz, B=300..600	CP	16ta	-	3a	San
GSG	-	BAS70SG-AE3	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns, Halogen Free	SOT-23	16dl	-	3a	Utc
GSG	-	BAS70SWG-AL3	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns, Halogen Free	SOT-323	16dl	-	3a	Utc
GSL	-	BAS70SL-AE3	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns, Lead Free	SOT-23	16dl	-	3a	Utc
GSL	-	BAS70SWL-AL3	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns, Lead Free	SOT-323	16dl	-	3a	Utc
gT	-	BU45L412G	Vdet-IC	4.1V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
GT	-	2SC2412KPT-S	Si-npn	Sw, 50V, 150mA, 200mW, B=270..560, 180MHz	SOT-23	16ta	-	3a	Chm
GT	-	AP130-20R	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
GT-	-	RT9818C-25PV	Vdet-IC	2.5V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
GT=	-	RT9818C-25GV	Vdet-IC	2.5V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
GT0	-	BC857CT	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-523	16ta	-	3a	Phi
GT1	-	BC846AT	Si-npn	GP, 80V, 100mA, 150mW, B=110..220, >100MHz	SOT-523F	18ta	-	3a	Cen
GT1	-	BCX17	Si-pnp	AF-Drv, 50V, 500mA, 250mW, B=100..600, >80MHz	SOT-23	16ta	-	3a	Rhm
GT2	-	BC846BT	Si-npn	GP, 80V, 100mA, 150mW, B=200..450, 250MHz	SOT-523F	18ta	-	3a	Cen
GT2	-	BCX18	Si-pnp	AF-Drv, 30V, 500mA, 250mW, B=100..600, >80MHz	SOT-23	16ta	-	3a	Rhm
GT3	-	2SC4168-3	Si-npn	Sw, 40V, 150mA, 200mA, B=60..120, 700MHz	SOT-323	16ta	-	3a	San
GT3	-	2SC4443-3	Si-npn	Sw, 20V, 150mA, 150mW, B=60..120, 700MHz	SOT-323	16ta	-	3a	San
GT3	-	BC847AT	Si-npn	GP, 50V, 100mA, 330mW, B=110..220, 250MHz	SOT-523F	18ta	-	3a	Cen
GT4	-	2SC4168-4	Si-npn	Sw, 40V, 150mA, 200mA, B=90..180, 700MHz	SOT-323	16ta	-	3a	San
GT4	-	2SC4443-4	Si-npn	Sw, 20V, 150mA, 150mW, B=90..180, 700MHz	SOT-323	16ta	-	3a	San
GT4	-	BC847BT	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, >100MHz	SOT-523F	18ta	-	3a	Cen
GT5	-	2SC4168-5	Si-npn	Sw, 40V, 150mA, 200mA, B=135..270, 700MHz	SOT-323	16ta	-	3a	San
GT5	-	2SC4443-5	Si-npn	Sw, 20V, 150mA, 150mW, B=135..270, 700MHz	SOT-323	16ta	-	3a	San
GT5	-	BC847CT	Si-npn	GP, 50V, 100mA, 150mW, B=420..800, >100MHz	SOT-523F	18ta	-	3a	Cen
GT6	-	BC856AT	Si-pnp	GP, 80V, 100mA, 250mW, B=125..250, >100MHz	SOT-523F	18ta	-	3a	Cen
GT7	-	BC856BT	Si-pnp	GP, 80V, 100mA, 250mW, B=220..475, >100MHz	SOT-523F	18ta	-	3a	Cen
GT8	-	BC857AT	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-523F	18ta	-	3a	Cen
GT9	-	BC857BT	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-523F	18ta	-	3a	Cen
GU	-	AP130-21R	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
GU-	-	RT9818C-27PV	Vdet-IC	2.7V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
GU=	-	RT9818C-27GV	Vdet-IC	2.7V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
GU1	-	BCX19	Si-npn	AF-Drv, 50V, 500mA, 250mW, B=100..600, 200MHz	SOT-23	16ta	-	3a	Rhm
GU1	-	CHDTA114GUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R2=10k	SOT-323	16ta	-	3a	Chm
GU2	-	CHDTA144GUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R2=47k	SOT-323	16ta	-	3a	Chm
GU3	-	CHDTA115GUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R2=100k	SOT-323	16ta	-	3a	Chm
GU8	-	BSR14	Si-npn	HF/Sw, 75V, 800mA, 250mW, B=100..300, 300MHz	SOT-23	16ta	-	3a	Rhm
GUA	-	CHDTC114GUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R2=10k	SOT-323	16ta	-	3a	Chm
GUB	-	CHDTC124GUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R2=22k	SOT-323	16ta	-	3a	Chm
GUC	-	CHDTC144GUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R2=47k	SOT-323	16ta	-	3a	Chm
GUD	-	CHDTC115GUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R2=100k	SOT-323	16ta	-	3a	Chm
GV	-	1SV249	PIN-diode	Dual, VHF/UHF, 50V, 50mA, 0.23pF, 3.5Ω(100MHz)	MCP	16dl	-	3a	San
GV	-	1SV251	PIN-diode	Dual, VHF/UHF, 50V, 50mAA, 0.23pF, 3.5Ω(100MHz)	SOT-23	16dl	-	3a	San
GV	-	AP130-22R	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
GV-	-	RT9198-31PV	LVR-IC	LDO, 3.1V±1%, 300mA	SOT-23	16cg	VR1	3a	Rct
gW	-	BU45L422G	Vdet-IC	4.2V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
GW	-	2SC5619	Si-npn	UHF, TV-tun, 20V, 50mA, 150mW, 4.5GHz, B=50..250	SC-59	16ta	-	3a	Ish
GW	-	2SC5620	Si-npn	UHF, TV-tun, 20V, 50mA, 125mW, 4.5GHz, B=50..250	SOT-323	16ta	-	3a	Ish
GW	-	2SC5621	Si-npn	UHF, TV-tun, 20V, 50mA, 100mW, 4.5GHz, B=50..250	SC-75A	16ta	-	3a	Ish
GW	-	AP130-23R	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
GW	-	RT9166-36CVL	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
GW-	-	RT9166-36PVL	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
gX	-	BU45L432G	Vdet-IC	4.3V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
GX	-	AP130-24R	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
GX	-	DDZX14	Z-diode	14V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
GX-	-	RT9818B-16PVL	Vdet-IC	1.6V±1.5%, -Reset ODO, Td=55ms	SOT-23	16vdc	VD6	3a	Rct

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
gY	-	BU45L442G	Vdet-IC	4.4V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Gy	-	BD48L44G	Vdet-IC	4.4V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
GY	-	2SC2996-Y	Si-npn	FM/AM RF, 40V, 50mA, 150mW, B=120..240, 350MHz	SOT-23	16ta	-	3a	Tos
GY	-	2SC3689	Si-npn	AF-Amp, GP, 60V, 199mA, 200mW, B=800..3200, 200MHz	SOT-23	16ta	-	3a	San
GY	-	2SC4413	Si-npn	AF-Amp, 60V, 100mA, 150mW, B=800..3200, 200MHz	MCP	16ta	-	3a	San
GY	-	AP130-25R	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
GY	-	DDZX15	Z-diode	15V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
GY-	-	RT9818A-14PV	Vdet-IC	1.4V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
GZ	-	AP130-26R	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
GZ	-	SiP810CTEUDT	Vdet-IC	3.08V±1.5%, +Reset PPO 210ms	SOT-23	16vdc	VD7	3g	Vs
GZ-	-	RT9818A-16PV	Vdet-IC	1.6V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
h	-	AX6902AA	Vdet-IC	4.63V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Axl
H	-	2SK2076	n-FET	GP, 30V, Idss>0.4mA, Up<1.5V	SOT-23	16fa	-	3a	San
H	-	MRF947B	Si-npn	VHF/UHF, 20V, 50mA, 188mW, B=100..200, 8GHz	SOT-323	16ta	-	3a	Mot
H	-	SB02-03Q	Si-diode	SBR, HF, 30V, 200mA, Vf<0.55V(200mA), 6.3pF, 10ns	MCP	16dc	-	3a	San
H	cr	ELM7529NEB	Vdet-IC	2.9V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
H	cs	ELM7529CEB	Vdet-IC	2.9V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
H•Q	-	2SC3928A-Q	Si-npn	AF-Amp, 50V, 200mA, 200mW, B=120..270, 200MHz	SC-59	16ta	-	3a	Mit
H•Q	-	2SC4155A-Q	Si-npn	AF-Amp, 50V, 200mA, 150mW, 200MHz, B=120..270	SOT-323	16ta	-	3a	Mit
H•R	-	2SC3928A-R	Si-npn	AF-Amp, 50V, 200mA, 200mW, B=180..390, 200MHz	SC-59	16ta	-	3a	Mit
H•R	-	2SC4155A-R	Si-npn	AF-Amp, 50V, 200mA, 150mW, 200MHz, B=180..390	SOT-323	16ta	-	3a	Mit
H•S	-	2SC3928A-S	Si-npn	AF-Amp, 50V, 200mA, 200mW, B=270..560, 200MHz	SC-59	16ta	-	3a	Mit
H•S	-	2SC4155A-S	Si-npn	AF-Amp, 50V, 200mA, 150mW, 200MHz, B=270..560	SOT-323	16ta	-	3a	Mit
H•T	-	2SC3928A-T	Si-npn	AF-Amp, 50V, 200mA, 200mW, B=390..820, 200MHz	SC-59	16ta	-	3a	Mit
H•T	-	2SC4155A-T	Si-npn	AF-Amp, 50V, 200mA, 150mW, 200MHz, B=390..820	SOT-323	16ta	-	3a	Mit
H0	-	2SC4252	Si-npn	VHF-Osc, 20V, 30mA, 100mW, B=40..250, 2.1GHz	SOT-323	16ta	-	3a	Tos
H0	-	2SC4255	Si-npn	TV-VHF, 20V, 30mA, 2GHz	SOT-23	16ta	-	3a	Tos
H0	-	AP130-27R	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
H0	-	BZX84C75	Z-diode	70.79V, Zzt=255Ω, Izt=2mA, 225mW	SOT-23	16dc	-	3a	Lge
H0	-	ELM7620HAB	Vdet-IC	2.0V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
H0	-	R3113D401C	Vdet-IC	4V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
H0	-	R3130N30EA	Vdet-IC	3V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
H0	-	TC54VC6002ECB	Vdet-IC	6.0V±2%, -Reset PPO	SC-59	16vdb	VD7	3d	Mcc
H02	-	DTC323TK	Si-npn-Digi	Mute, AF, 50V, 100mA, 200mW, 200MHz, R1=2k2	SOT-346	16ta	-	3a	Rhm
H02	-	DTC323TU	Si-npn-Digi	Mute, AF, 50V, 100mA, 200mW, 200MHz, R1=2k2	UMT3	16ta	-	3a	Rhm
H03	-	DTC343TK	Si-npn-Digi	Mute, AF, 50V, 100mA, 200mW, 200MHz, R1=4k7	SOT-346	16ta	-	3a	Rhm
H03	-	XC61CC6002M	Vdet-IC	6.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Tor
H03	-	XE61CC6045MR	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23	16vdb	VD7	3h	Tor
H04	-	DTC314TK	Si-npn-Digi	Mute, AF, 50V, 100mA, 200mW, 250MHz, R1=10k	SOT-346	16ta	-	3a	Rhm
H04	-	DTC314TU	Si-npn-Digi	Mute, AF, 50V, 100mA, 200mW, 250MHz, R1=10k	UMT3	16ta	-	3a	Rhm
H05	-	LN61FC6012M	Vdet-IC	6.0V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Nln
H05	-	XC61FC6012M	Vdet-IC	6.0V±2%, +Reset PPO, 200ms	SOT-23	16vdb	VD7	3d	Tor
H05	-	XC61HC6012MR	Vdet-IC	6.0V±2%, -Reset PPO, 50..200ms	SOT-23	16vdc	VD7	3d	Tor
H06	-	LN61FC6042M	Vdet-IC	6.0V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Nln
H06	-	XC61FC6042M	Vdet-IC	6.0V±2%, +Reset PPO, 400ms	SOT-23	16vdb	VD7	3d	Tor
H06	-	XC61HC6042MR	Vdet-IC	6.0V±2%, -Reset PPO, 80..400ms	SOT-23	16vdc	VD7	3d	Tor
H07	-	DTC363TK	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=6k8	SOT-346	16ta	-	3a	Rhm
H07	-	LN61FC6052M	Vdet-IC	6.0V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Nln
H07	-	XC61FC6052M	Vdet-IC	6.0V±2%, +Reset PPO, 50ms	SOT-23	16vdb	VD7	3d	Tor
H07	-	XC61HC6052MR	Vdet-IC	6.0V±2%, -Reset PPO, 1..50ms	SOT-23	16vdc	VD7	3d	Tor
H1	-	AP130-28R	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
H1	-	BCW69	Si-pnp	GP, 50V, 100mA, 330mW, B=120..260, >150MHz	SOT-23	16ta	-	3a	Ste
H1	-	ELM7621HAB	Vdet-IC	2.1V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
H1	-	HVM187WK	PIN-diode	Dual, HF-Attenuator, 60V, 50mA, 2.4pF, <5.5Ω(10mA/100MHz)	SOT-23	16dg	-	3a	Ren
H1	-	MMBZ5241B	Z-diode	11V±5%, Izt=20mA, Zzt=22Ω, 350mW	SOT-23	16dc	-	3c	Pjt
H1	-	MMBZ5241BW	Z-diode	11V±5%, Izt=20mA, Zzt=22Ω, 150mW	SOT-523	16dc	-	3a	Di
H1	-	MMBZ5241BW	Z-diode	11V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOT-323	16dc	-	3c	Pjt
H1	-	R3113D411C	Vdet-IC	4.1V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
H1	-	R3130N31EA	Vdet-IC	3.1V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
H1	-	SST4416	n-FET	VHF/UHF, 30V, 350mW, Idss=5..15mA, Up<6V, Rds=150Ω	SOT-23	16fj	-	3a	Six
H11	-	2SJ166	p-MOSFET	GP, 50V, ±100mA, 200mW, <50Ω(20mA), 98/124ns	SOT-23	16fh	-	3a	Nec
H13	-	2SJ202	p-MOSFET	V-MOS, Sw, 16V, ±0.1A, <30Ω(10mA)	SOT-323	16fh	-	3a	Nec
H14	-	2SJ203	p-MOSFET	V-MOS, Sw, 16V, ±0.2A, <10Ω(10A)	SOT-23	16fh	-	3a	Nec
H15	-	2SJ204	p-MOSFET	V-MOS, Sw, 30V, ±0.2A, <8Ω(10mA)	SOT-23	16fh	-	3a	Nec
H16	-	2SJ210	p-MOSFET	V-MOS, Sw, 60V, ±0.2A, <10Ω(10mA)	SOT-23	16fh	-	3a	Nec
H17	-	2SJ209	p-MOSFET	V-MOS, Sw, 100V, ±0.1A, <60Ω(10mA)	SOT-23	16fh	-	3a	Nec
H18	-	2SJ211	p-MOSFET	V-MOS, Sw, 100V, ±0.2A, <20Ω(10mA)	SOT-23	16fh	-	3a	Nec
H19	-	SJ76H19S	Vdet-IC	1.9V±5%, +Reset OCO	SOT-23	16vda	VD6	3b	Kau
H1O	-	KSC2755-O	Si-npn	HF, 30V, 20mA, 150mW, B=70..140, >600MHz	SOT-23	16ta	-	3a	Sam
H1p	-	BCW69	Si-pnp	GP, 50V, 100mA, 330mW, B=120..260, >150MHz	SOT-23	16ta	-	3a	PhH



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H1R	-	KSC2755-R	Si-npn	HF, 30V, 20mA, 150mW, B=40..80, >600MHz	SOT-23	16ta	-	3a	Sam
H1t	-	BCW69	Si-pnp	GP, 50V, 100mA, 330mW, B=120..260, >150MHz	SOT-23	16ta	-	3a	PhM
H1W	-	BCW69	Si-pnp	GP, 50V, 100mA, 330mW, B=120..260, >150MHz	SOT-23	16ta	-	3a	PhC
H1Y	-	KSC2755-Y	Si-npn	HF, 30V, 20mA, 150mW, B=120..240, >600MHz	SOT-23	16ta	-	3a	Sam
H2	-	AP130-29R	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
H2	-	BCW70	Si-pnp	GP, 50V, 100mA, 330mW, B=215..500, >150MHz	SOT-23	16ta	-	3a	Ste
H2	-	ELM7622HAB	Vdet-IC	2.2V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
H2	-	HVM13	PIN-diode	HF-Attenuator, 60V, 50mA	SOT-23	16dc	-	3a	Ren
H2	-	MMBZ5242B	Z-diode	12V±5%, Izt=20mA, Zzt=30Ω, 350mW	SOT-23	16dc	-	3c	Pjt
H2	-	MMBZ5242BW	Z-diode	12V±5%, Izt=20mA, Zzt=30Ω, 150mW	SOT-523	16dc	-	3a	Di
H2	-	MMBZ5242BW	Z-diode	12V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-323	16dc	-	3c	Pjt
H2	-	R3113D421C	Vdet-IC	4.2V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
H2	-	R3130N32EA	Vdet-IC	3.2V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
H2-	-	RT9198-34PV	LVR-IC	LDO, 3.4V±1%, 300mA	SOT-23	16cg	VR1	3a	Rct
H20	cm	XC6383A201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H21	-	SJ76H21S	Vdet-IC	2.1V±5%, +Reset OCO	SOT-23	16vda	VD6	3b	Kau
H21	cm	XC6383A211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H22	cm	XC6383A221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H23	-	SJ76H23S	Vdet-IC	2.3V±5%, +Reset OCO	SOT-23	16vda	VD6	3b	Kau
H23	cm	XC6383A231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H24	cm	XC6383A241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H25	-	SJ76H25S	Vdet-IC	2.5V±5%, +Reset OCO	SOT-23	16vda	VD6	3b	Kau
H25	cm	XC6383A251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H26	cm	XC6383A261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H27	-	DTC363EK	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=6k8/6k8	SOT-346	16ta	-	3a	Rhm
H27	-	DTC363EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=6k8/6k8	UMT3	16ta	-	3a	Rhm
H27	-	SJ76H27S	Vdet-IC	2.7V±5%, +Reset OCO	SOT-23	16vda	VD6	3b	Kau
H27	cm	XC6383A271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H28	cm	XC6383A281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H29	-	SJ76H29S	Vdet-IC	2.9V±5%, +Reset OCO	SOT-23	16vda	VD6	3b	Kau
H29	cm	XC6383A291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H2O	-	KSC2756-O	Si-npn	HF, 20V, 30mA, 150mW, B=90..180, >850MHz	SOT-23	16ta	-	3a	Sam
H2p	-	BCW70	Si-pnp	GP, 50V, 100mA, 330mW, B=215..500, >150MHz	SOT-23	16ta	-	3a	PhH
H2R	-	KSC2756-R	Si-npn	HF, 20V, 30mA, 150mW, B=60..120, >850MHz	SOT-23	16ta	-	3a	Sam
H2t	-	BCW70	Si-pnp	GP, 50V, 100mA, 330mW, B=215..500, >150MHz	SOT-23	16ta	-	3a	PhM
H2W	-	BCW70	Si-pnp	GP, 50V, 100mA, 330mW, B=215..500, >150MHz	SOT-23	16ta	-	3a	PhC
H2Y	-	KSC2756-Y	Si-npn	HF, 20V, 30mA, 150mW, B=120..240, >850MHz	SOT-23	16ta	-	3a	Sam
H3	-	2SA956-3	Si-pnp	AF-Amp, Sw, 6V, 100mA, 150mW, 280MHz, B=80..130	SOT-23	16ta	-	3a	Nec
H3	-	AP130-30R	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
H3	-	BCW89	Si-pnp	AF, 80V, 100mA, 250mW, B=120..260, >100MHz	SOT-23	16ta	-	3a	Zx
H3	-	ELM7623HAB	Vdet-IC	2.3V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
H3	-	MMBZ5243B	Z-diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 350mW	SOT-23	16dc	-	3c	Pjt
H3	-	MMBZ5243BW	Z-diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 150mW	SOT-523	16dc	-	3a	Di
H3	-	MMBZ5243BW	Z-diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 200mW	SOT-323	16dc	-	3c	Pjt
H3	-	R3113D431C	Vdet-IC	4.3V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
H3	-	R3130N33EA	Vdet-IC	3.3V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
H3-	-	RT9166-17PVL	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
H30	cm	XC6383A301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H31	-	BCW89R	Si-pnp	AF, 60V, 100mA, 350mW, B=120..260, 150MHz	SOT-23	16te	-	3a	Phi
H31	-	SJ76H31S	Vdet-IC	3.1V±5%, +Reset OCO	SOT-23	16vda	VD6	3b	Kau
H31	cm	XC6383A311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H32	-	SJ76H32S	Vdet-IC	3.2V±5%, +Reset OCO	SOT-23	16vda	VD6	3b	Kau
H32	cm	XC6383A321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H33	-	SJ76H33S	Vdet-IC	3.3V±5%, +Reset OCO	SOT-23	16vda	VD6	3b	Kau
H33	cm	XC6383A331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H34	-	SJ76H34S	Vdet-IC	3.4V±5%, +Reset OCO	SOT-23	16vda	VD6	3b	Kau
H34	cm	XC6383A341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H35	-	SJ76H35S	Vdet-IC	3.5V±5%, +Reset OCO	SOT-23	16vda	VD6	3b	Kau
H35	cm	XC6383A351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H36	-	SJ76H36S	Vdet-IC	3.6V±5%, +Reset OCO	SOT-23	16vda	VD6	3b	Kau
H36	cm	XC6383A361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H37	cm	XC6383A371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H38	cm	XC6383A381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H39	-	SJ76H39S	Vdet-IC	3.9V±5%, +Reset OCO	SOT-23	16vda	VD6	3b	Kau
H39	cm	XC6383A391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H3O	-	KSC2757	Si-npn	AF, 30V, 50mA, 150mW, B=90..180, >1100MHz	SOT-23	16ta	-	3a	Sam
H3p	-	BCW89	Si-pnp	AF, 80V, 100mA, 250mW, B=120..260, >150MHz	SOT-23	16ta	-	3a	Phi
H3R	-	KSC2757R	Si-npn	AF, 30V, 50mA, 150mW, B=60..120, >1100MHz	SOT-23	16ta	-	3a	Sam
H3Y	-	KSC2757Y	Si-npn	AF, 30V, 50mA, 150mW, B=120..240, >1100MHz	SOT-23	16ta	-	3a	Sam
H4	-	2SA956-4	Si-pnp	AF-Amp, Sw, 6V, 100mA, 150mW, 280MHz, B=110..170	SOT-23	16ta	-	3a	Nec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H4	-	2SC3134-4	Si-npn	AF, 60V, 150mA, 200mW, 100MHz, B=90..180	SOT-23	16ta	-	3a	San
H4	-	AP130-31R	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
H4	-	BCW69R	Si-pnp	GP, 50V, 100mA, 330mW, B=120..260, >150MHz	SOT-23	16te	-	3a	Zx
H4	-	ELM7624HAB	Vdet-IC	2.4V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
H4	-	HVM121WK	PIN-diode	Dual, HF-Attenuator, 100V, 0.1A	SOT-23	16dg	-	3a	Ren
H4	-	KA4A4P	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/47k	SOT-416	16ta	-	3a	Nec
H4	-	MMBZ5244B	Z-diode	14V±5%, Izt=9.0mA, Zzt=15Ω, 350mW	SOT-23	16dc	-	3c	Pjt
H4	-	MMBZ5244BW	Z-diode	14V±5%, Izt=9.0mA, Zzt=15Ω, 200mW	SOT-323	16dc	-	3c	Pjt
H4	-	R3113D441C	Vdet-IC	4.4V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
H4	-	R3130N34EA	Vdet-IC	3.4V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
H4	-	SST5484	n-FET	VHF/UHF, 25V, 350mW, Idss=1..5mA, Up<3V	SOT-23	16fj	-	3a	Six
H4-	-	RT9809-30PVL	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
H40	cm	XC6383A401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H41	cm	XC6383A411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H42	-	SJ76H42S	Vdet-IC	4.2V±5%, +Reset OCO	SOT-23	16vda	VD6	3b	Kau
H42	cm	XC6383A421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H43	cm	XC6383A431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H44	cm	XC6383A441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H45	-	SJ76H45S	Vdet-IC	4.5V±5%, +Reset OCO	SOT-23	16vda	VD6	3b	Kau
H45	cm	XC6383A451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H46	cm	XC6383A461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H47	cm	XC6383A471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H48	cm	XC6383A481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H49	cm	XC6383A491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H4BC	-	UH4PBC	Si-diode	Rectifier, 100V, 4A, Vf<1.05V(4A)	TO-277A	76dh	-	3o	Vs
H4CC	-	UH4PCC	Si-diode	Rectifier, 150V, 4A, Vf<1.05V(4A)	TO-277A	76dh	-	3o	Vs
H4DC	-	UH4PDC	Si-diode	Rectifier, 200V, 4A, Vf<1.05V(4A)	TO-277A	76dh	-	3o	Vs
H4Z	-	KSC2758	Si-npn	UHF, 30V, 20mA, 150mW, B=60..240, >1GHz	SOT-23	16ta	-	3a	Sam
H5	-	2SA956-5	Si-pnp	AF-Amp, Sw, 6V, 100mA, 150mW, 280MHz, B=150..240	SOT-23	16ta	-	3a	Nec
H5	-	2SC3134-5	Si-npn	AF, 60V, 150mA, 200mW, 100MHz, B=135..270	SOT-23	16ta	-	3a	San
H5	-	2SC4446-6	Si-npn	GP, AF, 60V, 150mA, 150mW, B=200..400, 130MHz	SOT-323	16ta	-	3a	San
H5	-	AP130-32R	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
H5	-	BCW70R	Si-pnp	GP, 50V, 100mA, 330mW, B=215..500, >150MHz	SOT-23	16te	-	3a	Zx
H5	-	ELM7625HAB	Vdet-IC	2.5V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
H5	-	HVM14	PIN-diode	VHF/UHF-Attenuator, 50V, 50mA	SOT-23	16dc	-	3a	Ren
H5	-	MMBZ5245B	Z-diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 350mW	SOT-23	16dc	-	3c	Pjt
H5	-	MMBZ5245BW	Z-diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 150mW	SOT-523	16dc	-	3a	Di
H5	-	MMBZ5245BW	Z-diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 200mW	SOT-323	16dc	-	3c	Pjt
H5	-	R3113D451C	Vdet-IC	4.5V±2%, -Reset, PPO	SON1408-3	18vda	VD7	3d	Ric
H5	-	R3130N35EA	Vdet-IC	3.5V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
H5	-	SP810EK-4-0	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Sip
H5	-	SST5485	n-FET	VHF/UHF, 25V, 350mW, Idss=4..10mA, Up<4V	SOT-23	16fj	-	3a	Six
H5-	-	RT9198-27PV	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-23	16cg	VR1	3a	Rct
H50	-	BZX84B2V4-V-G	Z-diode	2.35..2.45V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H50	-	LN1131P311MR	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H50	cm	XC6383A501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H51	-	BZX84B2V7-V-G	Z-diode	2.64..2.75V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H51	cm	XC6383A511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H52	-	BZX84B3V0-V-G	Z-diode	2.94..3.06V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H52	cm	XC6383A521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H53	-	BZX84B3V3-V-G	Z-diode	3.23..3.37V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H53	cm	XC6383A531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H54	-	BZX84B3V6-V-G	Z-diode	3.52..3.67V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H54	cm	XC6383A541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H55	-	BZX84B3V9-V-G	Z-diode	3.82..3.98V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H55	cm	XC6383A551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H56	-	BZX84B4V3-V-G	Z-diode	4.21..4.39V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H56	cm	XC6383A561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H57	-	BZX84B4V7-V-G	Z-diode	4.61..4.79V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H57	cm	XC6383A571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H58	-	BZX84B5V1-V-G	Z-diode	5.0..5.20V, Zzt=60Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H58	cm	XC6383A581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H59	-	BZX84B5V6-V-G	Z-diode	5.49..5.71V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H59	cm	XC6383A591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H5B	-	LN1131P122MR	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5C	-	LN1131P132MR	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5D	-	LN1131P142MR	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5E	-	LN1131P152MR	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5F	-	LN1131P162MR	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5H	-	LN1131P172MR	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H5K	-	LN1131P182MR	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5L	-	LN1131P192MR	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5M	-	LN1131P202MR	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5N	-	LN1131P212MR	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5O	-	KSC2223-O	Si-npn	RF, 30V, 20mA, 150mW, B=60..120, >600MHz	SOT-23	16ta	-	3a	Sam
H5P	-	LN1131P222MR	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5R	-	KSC2223-R	Si-npn	RF, 30V, 20mA, 150mW, B=40..80, >600MHz	SOT-23	16ta	-	3a	Sam
H5R	-	LN1131P232MR	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5S	-	LN1131P242MR	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5T	-	LN1131P252MR	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5U	-	LN1131P262MR	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5V	-	LN1131P272MR	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5X	-	LN1131P282MR	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5Y	-	KSC2223-Y	Si-npn	RF, 30V, 20mA, 150mW, B=90..180, >600MHz	SOT-23	16ta	-	3a	Sam
H5Y	-	LN1131P292MR	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H5Z	-	LN1131P302MR	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6	-	2SA956-6	Si-pnp	AF-Amp, Sw, 6V, 100mA, 150mW, 280MHz, B=200..230	SOT-23	16ta	-	3a	Nec
H6	-	2SC3134-6	Si-npn	AF, 60V, 150mA, 200mW, 100MHz, B=200..400	SOT-23	16ta	-	3a	San
H6	-	2SC4446-5	Si-npn	GP, AF, 60V, 150mA, 150mW, B=135..270, 130MHz	SOT-323	16ta	-	3a	San
H6	-	BCW89R	Si-pnp	AF, 80V, 100mA, 330mW, B=120..260, >150MHz	SOT-23	16ta	-	3a	Zx
H6	-	ELM7626HAB	Vdet-IC	2.6V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
H6	-	R3130N36EA	Vdet-IC	3.6V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
H6	-	SST5486	n-FET	VHF/UHF, 25V, 350mW, Idss=8..20mA, Up<6V	SOT-23	16fj	-	3a	Six
H6-	-	RT9818A-23PV	Vdet-IC	2.3V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
H60	-	BZX84B6V2-V-G	Z-diode	6.08..6.32V, Zzt=10Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H60	cm	XC6383A601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H61	-	BZX84B6V8-V-G	Z-diode	6.66..6.94V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H61	-	LN1131P322MR	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H61	cm	XC6383A611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H62	-	BZX84B7V5-V-G	Z-diode	7.35..7.65V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H62	-	LN1131P332MR	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H62	cm	XC6383A621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H63	-	BZX84B8V2-V-G	Z-diode	8.04..8.36V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H63	-	LN1131P342MR	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H63	cm	XC6383A631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H64	-	BZX84B9V1-V-G	Z-diode	8.92..9.28V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H64	-	LN1131P352MR	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H64	cm	XC6383A641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H65	-	BZX84B10-V-G	Z-diode	9.80..10.20V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H65	-	LN1131P362MR	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H65	cm	XC6383A651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H66	-	BZX84B11-V-G	Z-diode	10.78..11.22V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H66	-	LN1131P372MR	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H66	cm	XC6383A661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H67	-	BZX84B12-V-G	Z-diode	11.76..12.24V, Zzt=25Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H67	-	LN1131P382MR	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H67	cm	XC6383A671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H68	-	BZX84B13-V-G	Z-diode	12.74..13.26V, Zzt=30Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H68	-	LN1131P392MR	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H68	cm	XC6383A681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H69	-	BZX84B15-V-G	Z-diode	14.70..15.30V, Zzt=30Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H69	-	LN1131P402MR	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H69	cm	XC6383A691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H6A	-	LN1131P412MR	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6B	-	LN1131P422MR	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6C	-	LN1131P432MR	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6D	-	LN1131P442MR	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6D	-	UH6PD	Si-diode	Rectifier, 200V, 6A, Vf<1.05V(6A)	TO-277A	76dh	-	3o	Vs
H6E	-	LN1131P452MR	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6G	-	LN1131P462MR	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6H	-	LN1131P472MR	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6K	-	LN1131P482MR	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6L	-	LN1131P492MR	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6M	-	LN1131P502MR	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6N	-	LN1131P512MR	LVR-IC	LDO, 5.1V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6O	-	KSC2759-O	Si-npn	UHF, 30V, 50mA, 150mW, B=60..120, >2GHz	SOT-23	16ta	-	3a	Sam
H6P	-	LN1131P522MR	LVR-IC	LDO, 5.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6PJ	-	UH6PJ	Si-diode	Rectifier, 600V, 6A, Vf<3.0V(6A)	TO-277A	76dh	-	3o	Vs
H6R	-	KSC2759-R	Si-npn	UHF, 30V, 50mA, 150mW, B=40..80, >2GHz	SOT-23	16ta	-	3a	Sam
H6R	-	LN1131P532MR	LVR-IC	LDO, 5.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H6S	-	LN1131P542MR	LVR-IC	LDO, 5.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6T	-	LN1131P552MR	LVR-IC	LDO, 5.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6U	-	LN1131P562MR	LVR-IC	LDO, 5.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6V	-	LN1131P572MR	LVR-IC	LDO, 5.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6X	-	LN1131P582MR	LVR-IC	LDO, 5.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6Y	-	KSC2759-Y	Si-npn	UHF, 30V, 50mA, 150mW, B=90..180, >2GHz	SOT-23	16ta	-	3a	Sam
H6Y	-	LN1131P592MR	LVR-IC	LDO, 5.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H6Z	-	LN1131P602MR	LVR-IC	LDO, 6.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
H7	-	2SC3134-7	Si-npn	AF, 60V, 150mA, 200mW, 100MHz, B=300..600	SOT-23	16ta	-	3a	San
H7	-	2SC4446-7	Si-npn	GP, AF, 60V, 150mA, 150mW, B=300..600, 130MHz	SOT-323	16ta	-	3a	San
H7	-	ELM7627HAB	Vdet-IC	2.7V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
H7	-	KN4A4P	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1/R2=10k/47k	SOT-416	16ta	-	3a	Nec
H7	-	R3130N37EA	Vdet-IC	3.7V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
H7-	-	RT9818A-24PV	Vdet-IC	2.4V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
H70	-	BZX84B16-V-G	Z-diode	15.68..16.32V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H70	cm	XC6383A701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz	SOT-23	16ss	DC2	3d	Tor
H71	-	BCF70R	Si-pnp	AF, 45V, 100mA, 350mW, B=215..500, >100MHz	SOT-23	16te	-	3a	Phi
H71	-	BZX84B18-V-G	Z-diode	17.64..18.36V, Zzt=45Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H72	-	BZX84B20-V-G	Z-diode	19.60..20.40V, Zzt=55Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H73	-	BZX84B22-V-G	Z-diode	21.56..22.44V, Zzt=55Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H74	-	BZX84B24-V-G	Z-diode	23.52..24.48V, Zzt=70Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H75	-	BZX84B27-V-G	Z-diode	26.46..27.54V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H76	-	BZX84B30-V-G	Z-diode	29.40..30.60V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H77	-	BZX84B33-V-G	Z-diode	32.34..33.66V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H78	-	BZX84B36-V-G	Z-diode	35.28..36.72V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H79	-	BZX84B39-V-G	Z-diode	38.22..39.78V, Zzt=130Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H7p	-	BCF70	Si-pnp	AF, 50V, 100mA, 250mW, B=215..500, >100MHz	SOT-23	16ta	-	3a	Phi
H8	-	AP8821N-08GC	Vdet-IC	0.8V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
H8	-	AP8821N-08GT	Vdet-IC	0.8V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
H8	-	AP8821N-08PC	Vdet-IC	0.8V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
H8	-	AP8821N-08PT	Vdet-IC	0.8V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
H8	-	BZX84C3V6	Z-diode	3.4..3.8V, Zzt=90Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
H8	-	ELM7628HAB	Vdet-IC	2.8V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
H8	-	R3130N38EA	Vdet-IC	3.8V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
H8-	-	RT9818A-25PV	Vdet-IC	2.5V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
H80	-	BZX84B43-V-G	Z-diode	42.14..43.86V, Zzt=150Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H81	-	BZX84B47-V-G	Z-diode	46.06..47.94V, Zzt=170Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H82	-	BZX84B51-V-G	Z-diode	49.98..52.02V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
H83	-	BZX84B56-V-G	Z-diode	54.88..57.12V, Zzt=135Ω, Izt=2.5mA, 300mW	SOT-23	16dc	-	3g	Vs
H84	-	BZX84B62-V-G	Z-diode	60.76..63.24V, Zzt=150Ω, Izt=2.5mA, 300mW	SOT-23	16dc	-	3g	Vs
H85	-	BZX84B68-V-G	Z-diode	66.64..69.36V, Zzt=200Ω, Izt=2.5mA, 300mW	SOT-23	16dc	-	3g	Vs
H86	-	BZX84B75-V-G	Z-diode	73.50..76.50V, Zzt=250Ω, Izt=2.5mA, 300mW	SOT-23	16dc	-	3g	Vs
H8Z	-	KSC2734	Si-npn	AF, 20V, 50mA, 150mW, B=20..200, >3500MHz	SOT-23	16ta	-	3a	Sam
H9	-	1SS344	Si-diode	Schottky, 20V, 0.5A	SOT-323	16dc	-	3a	Tos
H9	-	AP130-33R	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
H9	-	AP8821N-09GC	Vdet-IC	0.9V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
H9	-	AP8821N-09GT	Vdet-IC	0.9V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
H9	-	AP8821N-09PC	Vdet-IC	0.9V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
H9	-	AP8821N-09PT	Vdet-IC	0.9V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
H9	-	BZX84C16	Z-diode	15.3..17.1V, Zzt=40Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
H9	-	ELM7629HAB	Vdet-IC	2.9V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
H9	-	R3111N092C	Vdet-IC	0.9V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
H9	-	R3130N39EA	Vdet-IC	3.9V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
H9-	-	RT9818A-27PV	Vdet-IC	2.7V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
H9=	-	RT9818A-27GV	Vdet-IC	2.7V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
H9Z	-	KSC3120	Si-npn	UHF, 30V, 50mA, 150mW, B=40..200, >2.4GHz	SOT-23	16ta	-	3a	Sam
hA	-	BU45L452G	Vdet-IC	4.5V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Ha	-	BD48L45G	Vdet-IC	4.5V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
HA	-	2SA1883	Si-pnp	Fast-Sw, 15V, 200mA, 150mW, B=50..140, 1GHz, 11/19ns	SOT-23	16ta	-	3a	San
HA	-	2SC3119	Si-npn	UHF-TV-Tuner, AGC, 25V, 20mA, 150mW, B=25..100, 900MHz	SOT-23	16ta	-	3a	Tos
HA	-	AP130-34R	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
HA	-	DDZX9682	Z-diode	2.7V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HA	-	ELM7640LDB	Vdet-IC	4.0V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
HA	-	MMBZ5221BW	Z-diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-323	16dc	-	3c	Jiy
HA-	-	RT9818B-30PV	Vdet-IC	3.0V±1.5%, -Reset ODO, Td=55ms	SOT-23	16vda	VD6	3a	Rct
HAO	-	KSC3123-O	Si-npn	UHF, 30V, 50mA, 150mW, B=90..180, >1.4GHz	SOT-23	16ta	-	3a	Sam
HAR	-	KSC3123-R	Si-npn	UHF, 30V, 50mA, 150mW, B=60..120, >1.4GHz	SOT-23	16ta	-	3a	Sam
HAY	-	KSC3123-Y	Si-npn	UHF, 30V, 50mA, 150mW, B=120..240, >1.4GHz	SOT-23	16ta	-	3a	Sam
hB	-	BU45L462G	Vdet-IC	4.6V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Hb	-	BD48L46G	Vdet-IC	4.6V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HB	-	2SC3120	Si-npn	VHF/UHF-TV-Tuner, 30V, 50mA, 150mW, B=40..200, 2.4GHz	SC-59	16ta	-	3a	Tos
HB	-	2SC4245	Si-npn	UHF-Mix, 30V, 50mA, 100mW, B=40..200, 2.4GHz	SOT-323	16ta	-	3a	Tos
HB	-	AP130-35R	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
HB	-	BFN22	Si-npn	Vid, 250V, 20..50mA, >60MHz	SOT-23	16ta	-	3a	Ste
HB	-	DDZX9683	Z-diode	3.0V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HB	-	ELM7641LDB	Vdet-IC	4.1V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
HB	-	MMBZ5223BW	Z-diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-323	16dc	-	3c	Jiy
HB-	-	RT9819C-30PVL	Vdet-IC	3.0V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vda	VD7	3a	Rct
HBs	-	BFN22	Si-npn	Vid, 250V, 20..50mA, >60MHz	SOT-23	16ta	-	3a	Sie
hC	-	BU45L472G	Vdet-IC	4.7V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Hc	-	BD48L47G	Vdet-IC	4.7V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
HC	-	2SC2733	Si-npn	VHF, 30V, 50mA, 150mW, B>60, 1GHz	SOT-23	16ta	-	3a	Ren
HC	-	2SC3121	Si-npn	VHF/UHF-TV-Tuner, 30V, 50mA, 150mW, B=60..320, 1.5GHz	SC-59	16ta	-	3a	Tos
HC	-	2SC4246	Si-npn	UHF-Osc, 30V, 50mA, 100mW, B=60..320, 1.5GHz	SOT-323	16ta	-	3a	Tos
HC	-	2SC4463	Si-npn	HF, 30V, 50mA, 100mW, B>60, >600MHz	SOT-323	16ta	-	3a	Ren
HC	-	AP130-36R	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
HC	-	DDZX9684	Z-diode	3.3V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HC	-	ELM7642LDB	Vdet-IC	4.2V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
HC	-	MMBZ5225BW	Z-diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 200mW	SOT-323	16dc	-	3c	Jiy
HC	-	UNR32A5	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1=10k	SSSMini3	18ta	-	3a	Pan
HC-	-	RT9819C-26PVL	Vdet-IC	2.6V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vda	VD7	3a	Rct
HC7	-	CMUT5179	Si-npn	RF, 20V, 50mA, 250mW, B>25, 1.45GHz	SOT-523F	18ta	-	3a	Cen
HCs	-	BFN23	Si-pnp	Vid, 250V, 20..50mA, >60MHz	SOT-23	16ta	-	3a	Sie
hD	-	BU45L482G	Vdet-IC	4.8V±1%, -Reset ODO, Td=200ms	SSOP-3	16vda	VD6	3q	Rhm
Hd	-	BD48L48G	Vdet-IC	4.8V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
HD	-	2SC3122	Si-npn	VHF/UHF-TV-Tuner, 30V, 20mA, 150mW, B=60..300, 650MHz	SC-59	16ta	-	3a	Tos
HD	-	2SC4249	Si-npn	VHF/UHF, 30V, 20mA, 100mW, B=60..300, 650MHz	SOT-323	16ta	-	3a	Tos
HD	-	AP130-37R	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
HD	-	DDZX9685	Z-diode	3.6V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HD	-	ELM7643LDB	Vdet-IC	4.3V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
HD	-	MMBZ5226BW	Z-diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 200mW	SOT-323	16dc	-	3c	Jiy
HD	-	UNR32A6	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1=4k7	SSSMini3	18ta	-	3a	Pan
HD-	-	RT9819B-18PVL	Vdet-IC	1.8V±1.5%, -Reset PPO, Td=55ms	SOT-23	16vda	VD7	3a	Rct
hE	-	BU46L232G	Vdet-IC	2.3V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
He	-	BD48L49G	Vdet-IC	4.9V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
HE	-	2SC3123	Si-npn	VHF, TV-Mix, 30V, 50mA, 150mW, B=40..300, 1.4GHz	SC-59	16ta	-	3a	Tos
HE	-	2SC4250	Si-npn	VHF-Mix, 30V, 50mA, 100mW, B=40..300, 1.4GHz	SOT-323	16ta	-	3a	Tos
HE	-	AP130-38R	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
HE	-	DDZX9686	Z-diode	3.9V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HE	-	ELM7644LDB	Vdet-IC	4.4V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
HE	-	MMBZ5227BW	Z-diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 200mW	SOT-323	16dc	-	3c	Jiy
HE	-	UNR32A7	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1=22k	SSSMini3	18ta	-	3a	Pan
HE-	-	RT9818A-29PV	Vdet-IC	2.9V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
hF	-	BU46L242G	Vdet-IC	2.4V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Hf	-	BD48L50G	Vdet-IC	5.0V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
HF	-	2SC3124	Si-npn	VHF, TV-Tun, 30V, 50mA, 150mW, B=40..200, 1.1GHz	SC-59	16ta	-	3a	Tos
HF	-	2SC4251	Si-npn	VHF-Osc, 30V, 50mA, 100mW, B=40..200, 1.1GHz	SOT-323	16ta	-	3a	Tos
HF	-	AP130-39R	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
HF	-	BFN23	Si-pnp	Vid, 250V, 20..50mA, >60MHz	SOT-23	16ta	-	3a	Sie
HF	-	DDZX9687	Z-diode	4.3V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HF	-	ELM7645LDB	Vdet-IC	4.5V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
HF	-	KTC3882	Si-npn	VHF-Osc, 30V, 50mA, 150mW, B=40..200, 1.1GHz	SOT-23	16ta	-	3f	Kec
HF	-	MMBZ5228BW	Z-diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 200mW	SOT-323	16dc	-	3c	Jiy
HF	-	UNR32A8	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=510R/5.1k	SSSMini3	18ta	-	3a	Pan
HF-	-	RT9819C-33PV	Vdet-IC	3.3V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
HFH	-	C1815LT1-H	Si-npn	AF-Amp, 60V, 150mA, 200mW, B=200..400, >80MHz	SOT-23	16ta	-	3a	Wtr
HFL	-	C1815LT1-L	Si-npn	AF-Amp, 60V, 150mA, 200mW, B=130..200, >80MHz	SOT-23	16ta	-	3a	Wtr
hG	-	BU46L252G	Vdet-IC	2.5V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Hg	-	BD48L51G	Vdet-IC	5.1V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
HG	-	2SC6026MFV-GR	Si-npn	GP, Amp, 60V, 150mA, 50mW, >60MHz, B=200..400	SOT-723	18ta	-	3a	Tos
HG	-	AP130-40R	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
HG	-	DDZX9688	Z-diode	4.7V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HG	-	ELM7646LDB	Vdet-IC	4.6V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
HG-	-	RT9819D-33PV	Vdet-IC	3.3V±1.5%, -Reset PPO, Td=450ms	SOT-23	16vdc	VD7	3a	Rct
hH	-	BU46L262G	Vdet-IC	2.6V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Hh	-	BD48L52G	Vdet-IC	5.2V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
HH	-	2SC3125	Si-npn	TV-IF-Out, 30V, 50mA, 150mW, B=20..200, 600MHz	SC-59	16ta	-	3a	Tos
HH	-	2SC4253	Si-npn	TV-IF-Out, 30V, 50mA, 100mW, B=20..200, 600MHz	SOT-323	16ta	-	3a	Tos
HH	-	AP130-41R	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
HH	-	DDZX9689	Z-diode	5.1V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HH	-	ELM7647LDB	Vdet-IC	4.7V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
HH	-	MMBZ5229BW	Z-diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOT-323	16dc	-	3c	Jiy
HH-	-	RT9818B-25PV	Vdet-IC	2.5V±1.5%, -Reset ODO, Td=55ms	SOT-23	16vda	VD6	3a	Rct
HI	-	2SC3547A	Si-npn	TV-UHF-Osc, 12V, 30mA, 150mW, B=35..130, 4GHz	SOT-23	16ta	-	3a	Tos
HI	-	2SC4247	Si-npn	UHF-Osc, 20V, 30mA, 100mW, B=35..130, 4GHz	SOT-323	16ta	-	3a	Tos
HI	-	AP130-42R	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
HJ	-	AP130-43R	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
HJ	-	DDZX9690	Z-diode	5.6V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HJ	-	ELM7648LDB	Vdet-IC	4.8V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
HJ	-	MMBZ5230BW	Z-diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 200mW	SOT-323	16dc	-	3c	Jiy
HJ-	-	RT9818B-42PV	Vdet-IC	4.2V±1.5%, -Reset ODO, Td=55ms	SOT-23	16vda	VD6	3a	Rct
HJ-	-	RT9819C-27PV	Vdet-IC	2.7V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
hK	-	BU46L272G	Vdet-IC	2.7V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Hk	-	BD48L53G	Vdet-IC	5.3V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
HK	-	AP130-44R	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
HK	-	DDZX9691	Z-diode	6.2V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HK	-	ELM7649LDB	Vdet-IC	4.9V±2%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
HK	-	MMBZ5231BW	Z-diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOT-323	16dc	-	3c	Jiy
HK	-	UNR32A9	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=1k/10k	SSSMini3	18ta	-	3a	Pan
HK-	-	RT9819D-26PV	Vdet-IC	2.6V±1.5%, -Reset PPO, Td=450ms	SOT-23	16vdc	VD7	3a	Rct
HKA	-	CHDTD133HKPT	Si-npn-Digi	Sw, 50V, 500mA, 200MHz, R1/R2=3.3k/10k	SOT-23	16ta	-	3a	Chm
HL	-	2SA1502	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, B>50, R1/R2=2.2k/10k	CP	16ta	-	3a	San
HL	-	2SA1722	Si-pnp-Digi	Sw, 50V, 100mA, R/R2=2.2k/10k	SOT-323	16ta	-	3a	San
HL	-	2SC3862	Si-npn	TV-UHF-Tuner, 30V, 50mA, 2400MHz	SOT-23	16te	-	3a	Tos
HL	-	AP130-45R	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
HL	-	DDZX9692	Z-diode	6.8V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HL	-	UNR32AA	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=100k/100k	SSSMini3	18ta	-	3a	Pan
HL-	-	RT9819D-27PV	Vdet-IC	2.7V±1.5%, -Reset PPO, Td=450ms	SOT-23	16vdc	VD7	3a	Rct
hM	-	BU46L282G	Vdet-IC	2.8V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Hm	-	BD48L54G	Vdet-IC	5.4V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
HM	-	2SC3547B	Si-npn	TV-UHF-Osc, 12V, 30mA, 150mW, B=70..300, 4GHz	SOT-23	16ta	-	3a	Tos
HM	-	2SC4248	Si-npn	UHF-Osc, 20V, 30mA, 100mW, B=70..130, 4GHz	SOT-323	16ta	-	3a	Tos
HM	-	AP130-46R	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
HM	-	DDZX9693	Z-diode	7.5V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HM	-	MCP1703T-1202E/CB	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Mcc
HM	-	MMBZ5232BW	Z-diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 200mW	SOT-323	16dc	-	3c	Jiy
HM-	-	RT9819D-29PV	Vdet-IC	2.9V±1.5%, -Reset PPO, Td=450ms	SOT-23	16vdc	VD7	3a	Rct
hN	-	BU46L292G	Vdet-IC	2.9V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Hn	-	BD48L55G	Vdet-IC	5.5V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
HN	-	2SC4244	Si-npn	VHF/UHF, 25V, 20mA,100mW, B=100, 850MHz	SOT-323	16ta	-	3a	Tos
HN	-	2SC5540	Si-npn	UHF-S-Band, LN, 16V, 20mA, 100mW, B=90..200, 10GHz	SSFP	18ta	-	3a	San
HN	-	AP130-47R	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
HN	-	DDZX9694	Z-diode	8.2V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HN	-	MMBZ5234BW	Z-diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOT-323	16dc	-	3c	Jiy
HN	-	UNR32AB	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1=100k	SSSMini3	18ta	-	3a	Pan
HN-	-	RT9819D-30PV	Vdet-IC	3.0V±1.5%, -Reset PPO, Td=450ms	SOT-23	16vdc	VD7	3a	Rct
HN3	-	2SC4871-3	Si-npn	UHF-S-B, Amp, Osc, 16V, 20mA, 0.1W, B=60..120, 10GHz	MCP	16ta	-	3a	San
HN4	-	2SC4871-4	Si-npn	UHF-S-B, Amp, Osc, 16V, 20mA, 0.1W, B=90..180, 10GHz	MCP	16ta	-	3a	San
HN5	-	2SC4871-5	Si-npn	UHF-S-B, Amp, Osc, 16V, 20mA, 0.1W, B=130..270, 10GHz	MCP	16ta	-	3a	San
HO	-	AP130-48R	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
hP	-	BU46L302G	Vdet-IC	3.0V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Hp	-	BD48L56G	Vdet-IC	5.6V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
HP	-	2SA1036K-P	Si-pnp	GP, 40V, 500mA, 200mW, B=82..180, 200MHz	SC-59	16ta	-	3a	Rhm
HP	-	2SA1577-P	Si-pnp	GP, 40V, 500mA, 200mW, B=82..180, 200MHz	SOT-323	16ta	-	3a	Rhm
HP	-	2SC4527	Si-npn	TV-UHF-Tuner, 30V, 50mA, 1500MHz	SOT-23	16te	-	3a	Tos
HP	-	AP130-49R	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
HP	-	DDZX9696	Z-diode	9.1V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HP	-	MCP1703T-1502E/CB	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Mcc
HP	-	MMBZ5235BW	Z-diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 200mW	SOT-323	16dc	-	3c	Jiy
HP-	-	RT9818B-24PVL	Vdet-IC	2.4V±1.5%, -Reset ODO, Td=55ms	SOT-23	16vdc	VD6	3a	Rct
HQ	-	2SA1036K-Q	Si-pnp	GP, 40V, 500mA, 200mW, B=120..270, 200MHz	SC-59	16ta	-	3a	Rhm
HQ	-	2SA1577-Q	Si-pnp	GP, 40V, 500mA, 200mW, B=120..270, 200MHz	SOT-323	16ta	-	3a	Rhm
HQ	-	2SC3928-Q	Si-npn	AF-Amp, 30V, 100mA, 150mW, B=120..270, 200MHz	SC-59	16ta	-	3a	Mit
HQ	-	2SC4155A-Q	Si-npn	AF-Amp, 50V, 200mA, 150mW, 200MHz, B=120..270	SOT-323	16ta	-	3a	Mit
HQ	-	2SC4155-Q	Si-npn	AF-Amp, 50V, 100mA, 150mW, 200MHz, B=120..270	SOT-323	16ta	-	3a	Mit
HQ	-	AP130-50R	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-23	16cg	VR1	3b	Ana
HQ	-	DDZX9697	Z-diode	10V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HQ	-	MCP1703T-1802E/CB	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Mcc
HQ-	-	RT9818A-22PV	Vdet-IC	2.2V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
HQ=	-	RT9818A-22GV	Vdet-IC	2.2V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
hR	-	BU46L312G	Vdet-IC	3.1V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Hr	-	BD48L57G	Vdet-IC	5.7V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
HR	-	2SA1035-R	Si-pnp	AF, LN, 55V, 10mA, 200mW, B=180..360, 200MHz	SC-59	16ta	-	3a	Pan
HR	-	2SA1036K-R	Si-pnp	GP, 40V, 500mA, 200mW, B=180..390, 200MHz	SC-59	16ta	-	3a	Rhm
HR	-	2SA1531A-R	Si-pnp	AF, LN, 55V, 50mA, 150mW, B=180..360, 80MHz	SOT-323	16ta	-	3a	Pan
HR	-	2SA1577-R	Si-pnp	GP, 40V, 500mA, 200mW, B=180..390, 200MHz	SOT-323	16ta	-	3a	Rhm
HR	-	2SC3928-R	Si-npn	AF-Amp, 30V, 100mA, 150mW, B=180..390, 200MHz	SC-59	16ta	-	3a	Mit
HR	-	2SC4155A-R	Si-npn	AF-Amp, 50V, 200mA, 150mW, 200MHz, B=180..390	SOT-323	16ta	-	3a	Mit
HR	-	2SC4155-R	Si-npn	AF-Amp, 50V, 100mA, 150mW, 200MHz, B=180..390	SOT-323	16ta	-	3a	Mit
HR	-	CAT809HTBI-GT3	Vdet-IC	4.55V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
HR	-	DDZX9698	Z-diode	11V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HR	-	MCP1703T-2502E/CB	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Mcc
HR	-	MMBZ5236BW	Z-diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 200mW	SOT-323	16dc	-	3c	Jiy
HR-	-	RT9819G-26PV	Vdet-IC	2.6V±1.5%, +Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
hS	-	BU46L322G	Vdet-IC	3.2V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
HS	-	2SA1035-S	Si-pnp	AF, LN, 55V, 10mA, 200mW, B=260..520, 200MHz	SC-59	16ta	-	3a	Pan
HS	-	2SA1531A-S	Si-pnp	AF, LN, 55V, 50mA, 150mW, B=260..520, 80MHz	SOT-323	16ta	-	3a	Pan
HS	-	2SC3928-S	Si-npn	AF-Amp, 30V, 100mA, 150mW, B=270..560, 200MHz	SC-59	16ta	-	3a	Mit
HS	-	2SC4155A-S	Si-npn	AF-Amp, 50V, 200mA, 150mW, 200MHz, B=270..560	SOT-323	16ta	-	3a	Mit
HS	-	2SC4155-S	Si-npn	AF-Amp, 50V, 100mA, 150mW, 200MHz, B=270..560	SOT-323	16ta	-	3a	Mit
HS	-	2SK2751	n-FET	LN, 40V, 10mA, 200mW, Up<3.5V	SC-59	16fa	-	3a	Pan
HS	-	2SK2988	n-FET	AF imp-conv, 40V, 10mA, 125mW, Idss<4.7mA, Up<3.5V	SC-78	16fa	-	3a	Pan
HS	-	DDZX9699	Z-diode	12V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HS	-	MCP1703T-2802E/CB	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Mcc
HS-	-	RT9819E-28PV	Vdet-IC	2.8V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Rct
HS2	-	2SA1778-2	Si-pnp	VHF conv/osc, 15V, 50mA, 250mW, B=40..80, 1.2GHz	SOT-23	16ta	-	3a	San
HS3	-	2SA1778-3	Si-pnp	VHF conv/osc, 15V, 50mA, 250mW, B=60..120, 1.2GHz	SOT-23	16ta	-	3a	San
HS4	-	2SA1778-4	Si-pnp	VHF conv/osc, 15V, 50mA, 250mW, B=100..200, 1.2GHz	SOT-23	16ta	-	3a	San
hT	-	BU46L332G	Vdet-IC	3.3V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
HT	-	2SA1035-T	Si-pnp	AF, LN, 55V, 10mA, 200mW, B=360..700, 200MHz	SC-59	16ta	-	3a	Pan
HT	-	2SA1531A-T	Si-pnp	AF, LN, 55V, 50mA, 150mW, B=360..700, 80MHz	SOT-323	16ta	-	3a	Pan
HT	-	2SC3928-T	Si-npn	AF-Amp, 30V, 100mA, 150mW, B=390..820, 200MHz	SC-59	16ta	-	3a	Mit
HT	-	2SC4155A-T	Si-npn	AF-Amp, 50V, 200mA, 150mW, 200MHz, B=390..820	SOT-323	16ta	-	3a	Mit
HT	-	2SC4155-T	Si-npn	AF-Amp, 50V, 100mA, 150mW, 200MHz, B=390..820	SOT-323	16ta	-	3a	Mit
HT	-	CHT3019PT	Si-npn	AF, Sw, 80V, 1A, B=100..300, 100MHz	SOT-23	16ta	-	3a	Chm
HT	-	DDZX9700	Z-diode	13V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HT	-	MCP1703T-3002E/CB	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Mcc
HT-	-	RT9818F-34PV	Vdet-IC	3.4V±1.5%, +Reset ODO, Td=55ms	SOT-23	16vda	VD6	3a	Rct
HT10	-	MMBTH10	Si-npn	RF, 30V, 25mA, 225mW, B>60, >650MHz	SOT-23	16ta	-	3a	Wtr
HTQ	-	2SC5378-Q	Si-npn	UHF, LN, 15V, 80mA, 150mW, B=80..115, 7GHz	SOT-323	16ta	-	3a	Pan
HTQ	-	2SC5379-Q	Si-npn	UHF, LN, 15V, 80mA, 125mW, B=80..115, 7GHz	SOT-416	16ta	-	3a	Pan
HTR	-	2SC5378-R	Si-npn	UHF, LN, 15V, 80mA, 150mW, B=95..155, 7GHz	SOT-323	16ta	-	3a	Pan
HTR	-	2SC5379-R	Si-npn	UHF, LN, 15V, 80mA, 125mW, B=90..155, 7GHz	SOT-416	16ta	-	3a	Pan
HTS	-	2SC5378-S	Si-npn	UHF, LN, 15V, 80mA, 150mW, B=135..200, 7GHz	SOT-323	16ta	-	3a	Pan
HTS	-	2SC5379-S	Si-npn	UHF, LN, 15V, 80mA, 125mW, B=125..200, 7GHz	SOT-416	16ta	-	3a	Pan
HU	-	DDZX9701	Z-diode	14V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HU	-	MCP1703T-3302E/CB	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Mcc
HU-	-	RT9818F-36PV	Vdet-IC	3.6V±1.5%, +Reset ODO, Td=55ms	SOT-23	16vda	VD6	3a	Rct
HV	-	DDZX9702	Z-diode	15V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HV	-	MCP1703T-4002E/CB	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Mcc
HV-	-	RT9818E-50PV	Vdet-IC	5.0V±1.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Rct
hW	-	BU46L342G	Vdet-IC	3.4V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
HW	-	DDZX9703	Z-diode	16V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HW	-	MCP1703T-5002E/CB	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Mcc
HW-	-	RT9818B-18PVL	Vdet-IC	1.8V±1.5%, -Reset ODO, Td=55ms	SOT-23	16vdc	VD6	3a	Rct
hX	-	BU46L352G	Vdet-IC	3.5V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
HX	-	MMBZ5237BW	Z-diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOT-323	16dc	-	3c	Jiy
HX-	-	RT9819A-27PV	Vdet-IC	2.7V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
hY	-	BU46L362G	Vdet-IC	3.6V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Hy	-	BD48L58G	Vdet-IC	5.8V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
HY	-	2SC6026MFV-Y	Si-npn	GP, Amp, 60V, 150mA, 50mW, >60MHz, B=120..240	SOT-723	18ta	-	3a	Tos
HY	-	DDZX9705	Z-diode	18V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
HY	-	MMBZ5239BW	Z-diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 200mW	SOT-323	16dc	-	3c	Jiy
HY-	-	RT9818C-12PV	Vdet-IC	1.2V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
HZ	-	MMBZ5240BW	Z-diode	10V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOT-323	16dc	-	3c	Jiy
HZ-	-	RT9818C-33PV	Vdet-IC	3.3V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
i	-	AX6902BA	Vdet-IC	4.38V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Axl
I	-	MRF947R	Si-npn	VHF/UHF, 20V, 50mA, 188mW, B>50, 8GHz	SOT-323	16ta	-	3a	Mot
I0	-	EUP7968-15VI	LVR-IC	LDO, 1.5V±3%, 300mA	SOT-23	16cg	VR1	3b	Eut
I08	-	SST108	n-FET	Sw, 25V, 350mW, Idss=80mA, Rds(on)=8Ω, 1/4ns	SOT-23	16fj	-	3a	Cal



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
I09	-	SST109	n-FET	Sw, 25V, 350mW, Idss=40mA, Rds(on)=12Ω, 1/4ns	SOT-23	16fj	-	3a	Cal
I1	-	EUP7968-18VI	LVR-IC	LDO, 1.8V±3%, 300mA	SOT-23	16cg	VR1	3b	Eut
I10	-	SST110	n-FET	Sw, 25V, 350mW, Idss=10mA, Rds(on)=18Ω, 1/4ns	SOT-23	16fj	-	3a	Cal
I2	-	EUP7968-25VI	LVR-IC	LDO, 2.5V±3%, 300mA	SOT-23	16cg	VR1	3b	Eut
I3	-	EUP7968-33VI	LVR-IC	LDO, 3.3V±3%, 300mA	SOT-23	16cg	VR1	3b	Eut
I5	-	EUP7968-30VI	LVR-IC	LDO, 3.0V±3%, 300mA	SOT-23	16cg	VR1	3b	Eut
I6	-	EUP7968-28VI	LVR-IC	LDO, 2.8V±3%, 300mA	SOT-23	16cg	VR1	3b	Eut
I8	-	SST108	n-FET	Sw, 25V, 350mW, Idss=80mA, Rds(on)=8Ω, 1/4ns	SOT-23	16fj	-	3a	Six
I9	-	1SS336	Si-diode	Dual, Sw, 85V, 200mA, 7pf, <20ns	SOT-23	16df	-	3a	Tos
IC-	-	2SC3016	Si-npn	VHF/UHF-Osc, 10V, 50mA, 120mW, B=30..90, 1.45GHz	SOT-23	16ta	-	3a	Ren
ID-	-	2SC3127	Si-npn	UHF/VHF, 20V, 50mA, 150mW, B=30..900, 4.5GHz	SC-59A	16ta	-	3a	Ren
IE	-	2SC3722K-E	Si-npn	AF-Drv, 120V, 50mA, 200mW, B=390..820, >140MHz	SOT-346	16ta	-	3a	Rhm
IFB	-	2SB973-B	Si-pnp	GP, 10V, 700mA, 150mW, B=100..200, 280MHz	SOT-23	16ta	-	3a	Ren
IFC	-	2SB973-C	Si-pnp	GP, 10V, 700mA, 150mW, B=160..320, 280MHz	SOT-23	16ta	-	3a	Ren
IGD	-	2SK1215-D	n-MOSFET	VHF, 20V, 30mA, 100mW, Idss=4..8mA, Up<2V	SOT-23	16fk	-	3a	Ren
IGD	-	2SK360-D	n-MOSFET	VHF Amp, 20V, 30mA, 150mW, Idss=4..6mA, 8/14ms	SOT-23	16fk	-	3a	Ren
IGE	-	2SK1215-E	n-MOSFET	VHF, 20V, 30mA, 100mW, Idss=6..10mA, Up<2V	SOT-23	16fk	-	3a	Ren
IGE	-	2SK360-E	n-MOSFET	VHF Amp, 20V, 30mA, 150mW, Idss=6..8mA, 8/14ms	SOT-23	16fk	-	3a	Ren
IGF	-	2SK1215-F	n-MOSFET	VHF, 20V, 30mA, 100mW, Idss=8..12mA, Up<2V	SOT-23	16fk	-	3a	Ren
IGF	-	2SK360-F	n-MOSFET	VHF Amp, 20V, 30mA, 150mW, Idss=8..12mA, 8/14ms	SOT-23	16fk	-	3a	Ren
IHC	-	2SK431-C	n-FET	AF, LN, 40V, 30mA, 150mW, Idss=2.5..5mA, Up<1.5V	MPAK	16fa	-	3a	Ren
IHD	-	2SK431-D	n-FET	AF, LN, 40V, 30mA, 150mW, Idss=4..8mA, Up<1.5V	MPAK	16fa	-	3a	Ren
IHE	-	2SK431-E	n-FET	AF, LN, 40V, 30mA, 150mW, Idss=6..12mA, Up<1.5V	MPAK	16fa	-	3a	Ren
IHF	-	2SK431-F	n-FET	AF, LN, 40V, 30mA, 150mW, Idss=10..20mA, Up<1.5V	MPAK	16fa	-	3a	Ren
IJ	-	ETC809JU	Vdet-IC	4V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Etc
IJ	-	MIC809JBC3	Vdet-IC	4.0V±5%, -Reset PPO	SC-70	16vdc	VD7	3a	Mcr
IJ	-	MIC809JU	Vdet-IC	4.0V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
IJ	cb	MIC809JUY	Vdet-IC	4.0V±5%, -Reset PPO, Pb-free	SOT-23	16vdc	VD7	3a	Mcr
IJ	cb	MIC809JYC3	Vdet-IC	4.0V±5%, -Reset PPO, Pb-free	SC-70	16vdc	VD7	3a	Mcr
IJ-	-	2SC3374	Si-npn	Sw, 20V, 20mA, 150mW, B=20..200, >400MHz	MPAK	16ta	-	3a	Ren
IJ3	-	2SK1740-3	n-FET	AF, Sw, 40V, 75mA, 250mW, Idss=40..52mA	SOT-23	16fa	-	3a	San
IJ4	-	2SK1740-4	n-FET	AF, Sw, 40V, 75mA, 250mW, Idss=48..63mA	SOT-23	16fa	-	3a	San
IJ5	-	2SK1740-5	n-FET	AF, Sw, 40V, 75mA, 250mW, Idss=57..75mA	SOT-23	16fa	-	3a	San
IKB	-	2SC3521-B	Si-npn	HF, Sw, 40V, 100mA, 100mW, B=45..90	MPAK	16ta	-	3a	Ren
IKC	-	2SC3521-C	Si-npn	HF, Sw, 40V, 100mA, 100mW, B=80..160	MPAK	16ta	-	3a	Ren
IL	-	ETC809LU	Vdet-IC	4.63V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Etc
IL	-	MIC809LBC3	Vdet-IC	4.63V±5%, -Reset PPO	SC-70	16vdc	VD7	3a	Mcr
IL	-	MIC809LU	Vdet-IC	4.63V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
IL	cb	MIC809LUY	Vdet-IC	4.63V±5%, -Reset PPO, Pb-free	SOT-23	16vdc	VD7	3a	Mcr
IL	cb	MIC809LYC3	Vdet-IC	4.63V±5%, -Reset PPO, Pb-free	SC-70	16vdc	VD7	3a	Mcr
IL-	-	2SC3493	Si-npn	VHF/UHF, 15V, 20mA, 150mW, B=30..200, >700MHz	SOT-346	16ta	-	3a	Ren
IL-	-	2SC4263	Si-npn	HF, 15V, 20mA, 100mW, B=30..200, >700MHz	CMPAK	16ta	-	3a	Ren
IM	-	ETC809MU	Vdet-IC	4.38V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Etc
IM	-	MIC809MBC3	Vdet-IC	4.38V±5%, -Reset PPO	SC-70	16vdc	VD7	3a	Mcr
IM	-	MIC809MU	Vdet-IC	4.38V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
IM	cb	MIC809MUY	Vdet-IC	4.38V±5%, -Reset PPO, Pb-free	SOT-23	16vdc	VD7	3a	Mcr
IM	cb	MIC809MYC3	Vdet-IC	4.38V±5%, -Reset PPO, Pb-free	SC-70	16vdc	VD7	3a	Mcr
INB	-	2SA1468-B	Si-pnp	HV, 180V, 100mA, 150mW, B=100..200, 200MHz	SOT-23	16ta	-	3a	Ren
INC	-	2SA1468-C	Si-pnp	HV, 180V, 100mA, 150mW, B=160..320, 200MHz	SOT-23	16ta	-	3a	Ren
IO	-	2SA1298-O	Si-pnp	AF, Sw, 30V, 800mA, 200mA, B=100..200, 120MHz	SC-59	16ta	-	3a	Tos
IO	-	KTA1298-O	Si-pnp	AF, 35V, 800mA, 200mW, B=100..200, >80MHz	SOT-23	16ta	-	3f	Kec
IO	-	WTA8921-O	Si-pnp	GP, 35V, 800mA, 200mW, B=100..200, >80MHz	SOT-23	16ta	-	3a	Wtr
IP	-	AAT3562IGY-2.50	Vdet-IC	2.5V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ant
IP-	-	2SC3793	Si-npn	VHF/UHF, 20V, 50mA, 150mW, B=50..200, >1.4GHz	SOT-346	16ta	-	3a	Ren
IP-	-	2SC4262	Si-npn	VHF/UHF, 20V, 50mA, 100mW, B=50..200, >1.4GHz	SOT-323	16ta	-	3a	Ren
IR	-	2SB1220-R	Si-pnp	AF, LN, 150V, 100mA, 150mW, B=130..220, 200MHz	SOT-323	16ta	-	3a	Pan
IR	-	2SB1463-R	Si-pnp	GP, 150V, 50mA, 125mW, 200MHz, B=130..220	SOT-416	16ta	-	3a	Pan
IR	-	2SB792-R	Si-pnp	AF, LN, 150V, 50mA, 200mW, B=130..220, 200MHz	SC-59	16ta	-	3a	Pan
IR	-	2SC3722K-R	Si-npn	AF-Drv, 120V, 50mA, 200mW, B=120..390, >140MHz	SOT-346	16ta	-	3a	Rhm
IR	-	ETC809RU	Vdet-IC	2.63V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Etc
IR	-	EUP7968-35VI	LVR-IC	LDO, 3.5V±3%, 300mA	SOT-23	16cg	VR1	3b	Eut
IR	-	MIC809RBC3	Vdet-IC	2.63V±5%, -Reset PPO	SC-70	16vdc	VD7	3a	Mcr
IR	-	MIC809RU	Vdet-IC	2.63V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
IR	cb	MIC809RUY	Vdet-IC	2.63V±5%, -Reset PPO, Pb-free	SOT-23	16vdc	VD7	3a	Mcr
IR	cb	MIC809RYC3	Vdet-IC	2.63V±5%, -Reset PPO, Pb-free	SC-70	16vdc	VD7	3a	Mcr
IRD	-	2SA1484-D	Si-pnp	GP, 90V, 100mA, B=60..120, 90MHz	SOT-23	16ta	-	3a	Ren
IRE	-	2SA1484-E	Si-pnp	GP, 90V, 100mA, B=150..300, 90MHz	SOT-23	16ta	-	3a	Ren
IS	-	2SB1220-S	Si-pnp	AF, LN, 150V, 100mA, 150mW, B=180..330, 200MHz	SOT-323	16ta	-	3a	Pan
IS	-	2SB1463-S	Si-pnp	GP, 150V, 50mA, 125mW, 200MHz, B=185..330	SOT-416	16ta	-	3a	Pan
IS	-	2SB792-S	Si-pnp	AF, LN, 150V, 50mA, 200mW, B=185..330, 200MHz	SC-59	16ta	-	3a	Pan

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
IS	-	2SC3722K-S	Si-npn	AF-Drv, 120V, 50mA, 200mW, B=270..560, >140MHz	SOT-346	16ta	-	3a	Rhm
IS	-	ETC809SU	Vdet-IC	2.93V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Etc
IS	-	MIC809SBC3	Vdet-IC	2.93V±5%, -Reset PPO	SC-70	16vdc	VD7	3a	Mcr
IS	-	MIC809SU	Vdet-IC	2.93V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
IS	cb	MIC809SUY	Vdet-IC	2.93V±5%, -Reset PPO, Pb-free	SOT-23	16vdc	VD7	3a	Mcr
IS	cb	MIC809SYC3	Vdet-IC	2.93V±5%, -Reset PPO, Pb-free	SC-70	16vdc	VD7	3a	Mcr
IS-	-	2SC3513	Si-npn	VHF/UHF, 15V, 50mA, 150mW, B=50..250, >4.5GHz	SOT-346	16ta	-	3a	Ren
IS-	-	2SC4537	Si-npn	VHF/UHF, 15V, 50mA, 100mW, B=50..250, >4.5GHz	SOT-323	16ta	-	3a	Ren
IS5	-	2SA1881-5	Si-pnp	AF, Amp, 15V, 200mA, 250mW, B=135..270, 300MHz	SOT-23	16ta	-	3a	San
IS6	-	2SA1881-6	Si-pnp	AF, Amp, 15V, 200mA, 250mW, B=200..400, 300MHz	SOT-23	16ta	-	3a	San
IS7	-	2SA1881-7	Si-pnp	AF, Amp, 15V, 200mA, 250mW, B=300..600, 300MHz	SOT-23	16ta	-	3a	San
IT	-	2SB1220-T	Si-pnp	AF, LN, 150V, 100mA, 150mW, B=260..450, 200MHz	SOT-323	16ta	-	3a	Pan
IT	-	2SB1463-T	Si-pnp	GP, 150V, 50mA, 125mW, 200MHz, B=260..450	SOT-416	16ta	-	3a	Pan
IT	-	2SB792-T	Si-pnp	AF, LN, 150V, 50mA, 200mW, B=260..450, 200MHz	SC-59	16ta	-	3a	Pan
IT	-	CHT817PT-R	Si-npn	AF, Sw, 45V, 500mA, B=160..400, 170MHz	SOT-23	16ta	-	3a	Chm
IT	-	ETC809TU	Vdet-IC	3.08V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Etc
IT	-	EUP7968-12VI	LVR-IC	LDO, 1.2V±3%, 300mA	SOT-23	16cg	VR1	3b	Eut
IT	-	MIC809TBC3	Vdet-IC	3.08V±5%, -Reset PPO	SC-70	16vdc	VD7	3a	Mcr
IT	-	MIC809TU	Vdet-IC	3.08V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
IT	cb	MIC809TUY	Vdet-IC	3.08V±5%, -Reset PPO, Pb-free	SOT-23	16vdc	VD7	3a	Mcr
IT	cb	MIC809TYC3	Vdet-IC	3.08V±5%, -Reset PPO, Pb-free	SC-70	16vdc	VD7	3a	Mcr
IX	-	MIC809-5S-U	Vdet-IC	3.3V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
IY	-	2SA1298-Y	Si-pnp	AF, Sw, 30V, 800mA, 200mA, B=160..320, 120MHz	SC-59	16ta	-	3a	Tos
IY	-	KTA1298-Y	Si-pnp	AF, 35V, 800mA, 200mW, B=160..320, >80MHz	SOT-23	16ta	-	3f	Kec
IY	-	WTA8921-Y	Si-pnp	GP, 35V, 800mA, 200mW, B=160..320, >80MHz	SOT-23	16ta	-	3a	Wtr
j	-	AX6902CA	Vdet-IC	4.0V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Axl
J	cr	ELM7530NEB	Vdet-IC	3.0V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
J	cs	ELM7530CEB	Vdet-IC	3.0V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
J0	-	AP8821N-10GC	Vdet-IC	1.0V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
J0	-	AP8821N-10GT	Vdet-IC	1.0V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
J0	-	AP8821N-10PC	Vdet-IC	1.0V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
J0	-	AP8821N-10PT	Vdet-IC	1.0V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
J0	-	ELM7630HAB	Vdet-IC	3.0V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
J0	-	HSMS-2700	Si-diode	Schottky, 15V, 350mA, Vf<0.55V(350mA), Cd<6.7pF	SOT-23	16dc	-	3a	Agi
J0	-	HSMS-270B	Si-diode	Schottky, 15V, 750mA, Vf<0.55V(350mA), Cd<6.7pF	SOT-323	16dc	-	3a	Agi
J0	-	R3111N102C	Vdet-IC	1V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
J0	-	R3130N40EA	Vdet-IC	4V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
J0	-	SST110	n-FET	Sw, 25V, 350mW, Idss=10mA, Rds(on)=18Ω, 1/4ns	SOT-23	16fj	-	3a	Six
J0	cg	BL8558-30PRM	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J0	cg	BL8591CB3TR30	LVR-IC	LDO, 3.0V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J0	cg	LR8558-30PRM	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J0	ch	BL8558-20PRM	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J0	ch	BL8591CB3TR20	LVR-IC	LDO, 2.0V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J0	ch	LR8558-20PRM	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J0	ci	BL8558-40PRM	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J0	ci	BL8591CB3TR40	LVR-IC	LDO, 4.0V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J0	ci	LR8558-40PRM	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J0-	-	RT9818B-14PV	Vdet-IC	1.4V±1.5%, -Reset ODO, Td=55ms	SOT-23	16vda	VD6	3a	Rct
J01	-	SO2906R	Si-pnp	GP, 60V, 600mA, 400mW, >200MHz, B>40	SOT-23	16te	-	3a	Zx
J03	-	SO2907AR	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16te	-	3a	Zx
J05	-	SO2907R	Si-pnp	GP, 40V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16te	-	3a	Zx
J06	-	SO2894R	Si-pnp	Sw, 12V, 200mA, 360mW, 23/43ns	SOT-23	16te	-	3a	Zx
J1	-	AP8821N-11GC	Vdet-IC	1.1V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
J1	-	AP8821N-11GT	Vdet-IC	1.1V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
J1	-	AP8821N-11PC	Vdet-IC	1.1V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
J1	-	AP8821N-11PT	Vdet-IC	1.1V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
J1	-	BSH101	n-MOSFET	V-MOS, LogL, 60V, 0.7A, <0.9Ω	SOT-23	16fh	-	3a	Phi
J1	-	BSS138LT1	n-MOSFET	SIPMOS, LogL, 50V, 200mA, 225mW, 3.5Ω(220mA), 20/20ns	SOT-23	16fh	-	3m	Ons
J1	-	CHT9013PT-J	Si-npn	AF, Sw, 25V, 500mA, B=300..400, 150MHz	SOT-23	16ta	-	3a	Chm
J1	-	ELM7631HAB	Vdet-IC	3.1V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
J1	-	MMBZ5246B	Z-diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 350mW	SOT-23	16dc	-	3c	Pjt
J1	-	MMBZ5246BW	Z-diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 150mW	SOT-523	16dc	-	3a	Di
J1	-	MMBZ5246BW	Z-diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 200mW	SOT-323	16dc	-	3c	Pjt
J1	-	R3111N112C	Vdet-IC	1.2V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
J1	-	R3130N41EA	Vdet-IC	4.1V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
J1	-	TCM809LELB	Vdet-IC	4.63V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Mcc
J1	-	TCM809LENB	Vdet-IC	4.63V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
J1	-	ZC830	C-diode	VHF/UHF-Tuning, 25V, 330mW, 10pF(2V), ΔC=±20%	SOT-23	16dc	-	3a	Zx
J1	cg	BL8558-31PRM	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J1	cg	BL8591CB3TR31	LVR-IC	LDO, 3.1V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J1	cg	LR8558-31PRM	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J1	ch	BL8558-21PRM	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J1	ch	BL8591CB3TR21	LVR-IC	LDO, 2.1V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J1	ch	LR8558-21PRM	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J1	ci	BL8558-41PRM	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J1	ci	BL8591CB3TR41	LVR-IC	LDO, 4.1V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J1	ci	LR8558-41PRM	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J10	-	CHT856BPT-Q	Si-pnp	AF, Sw, 65V, 100mA, B=125..250, 200MHz	SOT-23	16ta	-	3a	Chm
J11	-	CHT856BPT-R	Si-pnp	AF, Sw, 65V, 100mA, B=220..475, 200MHz	SOT-23	16ta	-	3a	Chm
J12	-	CHT856BPT-S	Si-pnp	AF, Sw, 65V, 100mA, B=420..800, 200MHz	SOT-23	16ta	-	3a	Chm
J12	-	SO2906AR	Si-pnp	GP, 60V, 600mA, 400mW, >200MHz, B>40	SOT-23	16te	-	3a	Zx
J13	-	CHT857BPT-Q	Si-pnp	AF, Sw, 45V, 100mA, B=125..250, 100MHz	SOT-23	16ta	-	3a	Chm
J14	-	CHT857BPT-R	Si-pnp	AF, Sw, 45V, 100mA, B=220..475, 100MHz	SOT-23	16ta	-	3a	Chm
J15	-	CHT857BPT-S	Si-pnp	AF, Sw, 45V, 100mA, B=420..800, 100MHz	SOT-23	16ta	-	3a	Chm
J16	-	CH848BPT-P	Si-npn	AF, Sw, 30V, 100mA, B=110..220, 300MHz	SOT-23	16ta	-	3a	Chm
J17	-	CH848BPT-Y	Si-npn	AF, Sw, 30V, 100mA, B=420..800, 300MHz	SOT-23	16ta	-	3a	Chm
J18	-	CH858BPT-Q	Si-pnp	AF, Sw, 30V, 100mA, B=125..250, 200MHz	SOT-23	16ta	-	3a	Chm
J19	-	CH858BPT-S	Si-pnp	AF, Sw, 30V, 100mA, B=420..800, 200MHz	SOT-23	16ta	-	3a	Chm
J1A	-	ZC830A	C-diode	VHF/UHF-Tuning, 25V, 330mW, 10pF(2V), ΔC=±10%	SOT-23	16dc	-	3a	Zx
J1B	-	ZC830B	C-diode	VHF/UHF-Tuning, 25V, 330mW, 10pF(2V), ΔC=±5%	SOT-23	16dc	-	3a	Zx
J1O	-	KSA1298-O	Si-pnp	GP, AF, 30V, 800mA, 200mW, B=100..200, 120MHz	SOT-23	16ta	-	3a	Sam
J1Y	-	KSA1298-Y	Si-pnp	GP, AF, 30V, 800mA, 200mW, B=130..320, 120MHz	SOT-23	16ta	-	3a	Sam
J2	-	2SC3142-2	Si-npn	AF, GP, 25V, 30mA, 150mW, 750MHz, B=40..80	SOT-23	16ta	-	3a	San
J2	-	2SK67-2	n-FET	GP, 20V, 10mA, 80mW, Idss=0.02..0.04mA, Up<0.8V	SOT-23	16fh	-	3a	Nec
J2	-	AP8821N-12GC	Vdet-IC	1.2V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
J2	-	AP8821N-12GT	Vdet-IC	1.2V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
J2	-	AP8821N-12PC	Vdet-IC	1.2V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
J2	-	AP8821N-12PT	Vdet-IC	1.2V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
J2	-	BL8558-12PRM	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J2	-	BL8591CB3TR12	LVR-IC	LDO, 1.2V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J2	-	BSH102	n-MOSFET	V-MOS, LogL, 30V, 0.85A, <0.6Ω	SOT-23	16fh	-	3a	Phi
J2	-	CHT9013PT-H	Si-npn	AF, Sw, 25V, 500mA, B=200..350, 150MHz	SOT-23	16ta	-	3a	Chm
J2	-	DRC9A13Z	Si-npn-Digi	Switching, 50V, 80mA, 125mW, R1/R2=1k/10k	SSMini3-F3-B	18ta	-	3a	Pan
J2	-	ELM7632HAB	Vdet-IC	3.2V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
J2	-	HSMS-2702	Si-diode	Dual, Schottky, 15V, 350mA, Vf<0.55V(350mA), Cd<6.7pF	SOT-23	16dl	-	3a	Agi
J2	-	HSMS-270C	Si-diode	Dual, Schottky, 15V, 750mA, Vf<0.55V(350mA), Cd<6.7pF	SOT-323	16dl	-	3a	Agi
J2	-	LR8558-12PRM	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J2	-	MAX809MTR	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ons
J2	-	MMBZ5247B	Z-diode	17V±5%, Izt=8.0mA, Zzt=19Ω, 350mW	SOT-23	16dc	-	3c	Pjt
J2	-	MMBZ5247BW	Z-diode	17V±5%, Izt=8.0mA, Zzt=19Ω, 200mW	SOT-323	16dc	-	3c	Pjt
J2	-	R3111N122C	Vdet-IC	1.2V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
J2	-	R3130N42EA	Vdet-IC	4.2V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
J2	-	TCM809MELB	Vdet-IC	4.38V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Mcc
J2	-	TCM809MENB	Vdet-IC	4.38V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
J2	-	ZC833	C-diode	VHF/UHF-Tuning, 25V, 330mW, 33pF(2V), ΔC=±20%	SOT-23	16dc	-	3a	Zx
J2	cg	BL8558-32PRM	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J2	cg	BL8591CB3TR32	LVR-IC	LDO, 3.2V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J2	cg	LR8558-32PRM	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J2	ch	BL8558-22PRM	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J2	ch	BL8591CB3TR22	LVR-IC	LDO, 2.2V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J2	ch	LR8558-22PRM	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J2	ci	BL8558-42PRM	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J2	ci	BL8591CB3TR42	LVR-IC	LDO, 4.2V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J2	ci	LR8558-42PRM	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J22	-	CHT1198PT-Q	Si-pnp	AF, Sw, 80V, 500mA, B=120..390, 180MHz	SOT-23	16ta	-	3a	Chm
J23	-	CHT1198PT-R	Si-pnp	AF, Sw, 80V, 500mA, B=120..390, 180MHz	SOT-23	16ta	-	3a	Chm
J25	-	SO3906R	Si-pnp	Sw, AF, 60/40V, 100mA, 200mW, B=100..300, >250MHz	SOT-23	16te	-	3a	Ste
J26	-	2SA2119PT	Si-pnp	AF, Sw, 12V, 500mA, B=270..680, 260MHz	SOT-23	16ta	-	3a	Chm
J2A	-	ZC833A	C-diode	VHF/UHF-Tuning, 25V, 330mW, 33pF(2V), ΔC=±10%	SOT-23	16dc	-	3a	Zx
J2B	-	ZC833B	C-diode	VHF/UHF-Tuning, 25V, 330mW, 33pF(2V), ΔC=±5%	SOT-23	16dc	-	3a	Zx
J3	-	2SC3142-3	Si-npn	AF, GP, 25V, 30mA, 150mW, 750MHz, B=60..120	SOT-23	16ta	-	3a	San
J3	-	2SK67-3	n-FET	GP, 20V, 10mA, 80mW, Idss=0.035..0.07mA, Up<0.8V	SOT-23	16fh	-	3a	Nec
J3	-	AP8821N-13GC	Vdet-IC	1.3V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
J3	-	AP8821N-13GT	Vdet-IC	1.3V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
J3	-	AP8821N-13PC	Vdet-IC	1.3V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
J3	-	AP8821N-13PT	Vdet-IC	1.3V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
J3	-	BL8558-13PRM	LVR-IC	LDO, 1.3V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J3	-	BL8591CB3TR13	LVR-IC	LDO, 1.3V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J3	-	BSH103	n-MOSFET	V-MOS, LogL, 30V, 0.85A, <0.5Ω	SOT-23	16fh	-	3a	Phi
J3	-	CHT9013PT-L	Si-npn	AF, Sw, 25V, 500mA, B=120..200, 150MHz	SOT-23	16ta	-	3a	Chm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J3	-	ELM7633HAB	Vdet-IC	3.3V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
J3	-	LR8558-13PRM	LVR-IC	LDO, 1.3V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J3	-	MAX809TTR	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ons
J3	-	MMBZ5248B	Z-diode	18V±5%, Izt=7.0mA, Zzt=23Ω, 350mW	SOT-23	16dc	-	3c	Pjt
J3	-	MMBZ5248BW	Z-diode	18V±5%, Izt=7.0mA, Zzt=23Ω, 150mW	SOT-523	16dc	-	3a	Di
J3	-	MMBZ5248BW	Z-diode	18V±5%, Izt=7.0mA, Zzt=23Ω, 200mW	SOT-323	16dc	-	3c	Pjt
J3	-	R3111N132C	Vdet-IC	1.3V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
J3	-	R3130N43EA	Vdet-IC	4.3V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
J3	-	TCM809TELB	Vdet-IC	3.08V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Mcc
J3	-	TCM809TENB	Vdet-IC	3.08V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
J3	-	ZC831	C-diode	VHF/UHF-Tuning, 25V, 330mW, 15pF(2V), ΔC=±20%	SOT-23	16dc	-	3a	Zx
J3	cg	BL8558-33PRM	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J3	cg	BL8591CB3TR33	LVR-IC	LDO, 3.3V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J3	cg	LR8558-33PRM	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J3	ch	BL8558-23PRM	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J3	ch	BL8591CB3TR23	LVR-IC	LDO, 2.3V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J3	ch	LR8558-23PRM	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J3	ci	BL8558-43PRM	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J3	ci	BL8591CB3TR43	LVR-IC	LDO, 4.3V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J3	ci	LR8558-43PRM	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J3-	-	RT9818E-19PV	Vdet-IC	1.9V±1.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Rct
J33	-	SO5401R	Si-pnp	GP, HV, 160V, 600mA, 200mW, B=50..240, 400MHz	SOT-23	16te	-	3a	Zx
J39	-	SO692R	Si-pnp	HV, Vld, 300V,100mA, 310mW, B>25, 50MHz	SOT-23	16te	-	3a	Ste
J3A	-	ZC831A	C-diode	VHF/UHF-Tuning, 25V, 330mW, 15pF(2V), ΔC=±10%	SOT-23	16dc	-	3a	Zx
J3B	-	ZC831B	C-diode	VHF/UHF-Tuning, 25V, 330mW, 15pF(2V), ΔC=±5%	SOT-23	16dc	-	3a	Zx
J3H	-	S9013LT1-H	Si-npn	GP, 40V, 500mA, 300mW, B=200..350, >150MHz	SOT-23	16ta	-	3a	Wtr
J3L	-	S9013LT1-L	Si-npn	GP, 40V, 500mA, 300mW, B=120..200, >150MHz	SOT-23	16ta	-	3a	Wtr
J4	-	2SC3142-4	Si-npn	AF, GP, 25V, 30mA, 150mW, 750MHz, B=90..180	SOT-23	16ta	-	3a	San
J4	-	2SK67-4	n-FET	GP, 20V, 10mA, 80mW, Idss=0.06..0.12mA, Up<0.8V	SOT-23	16fh	-	3a	Nec
J4	-	AP8821N-14GC	Vdet-IC	1.4V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
J4	-	AP8821N-14GT	Vdet-IC	1.4V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
J4	-	AP8821N-14PC	Vdet-IC	1.4V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
J4	-	AP8821N-14PT	Vdet-IC	1.4V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
J4	-	BL8558-14PRM	LVR-IC	LDO, 1.4V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J4	-	BL8591CB3TR14	LVR-IC	LDO, 1.4V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J4	-	CHT807PT-Q	Si-pnp	AF, Sw, 45V, 500mA, B=100..250, 100MHz	SOT-23	16ta	-	3a	Chm
J4	-	ELM7634HAB	Vdet-IC	3.4V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
J4	-	LR8558-14PRM	LVR-IC	LDO, 1.4V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J4	-	MMBZ5249B	Z-diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 350mW	SOT-23	16dc	-	3c	Pjt
J4	-	MMBZ5249BW	Z-diode	19V±5%, Izt=6.6mA, Zzt=23Ω, 200mW	SOT-323	16dc	-	3c	Pjt
J4	-	R3111N142C	Vdet-IC	1.4V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
J4	-	R3130N44EA	Vdet-IC	4.4V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
J4	-	TCM809SELB	Vdet-IC	2.93V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Mcc
J4	-	TCM809SENB	Vdet-IC	2.93V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
J4	-	ZC832	C-diode	VHF/UHF-Tuning, 25V, 330mW, 22pF(2V), ΔC=±20%	SOT-23	16dc	-	3a	Zx
J4	cg	BL8558-34PRM	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J4	cg	BL8591CB3TR34	LVR-IC	LDO, 3.4V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J4	cg	LR8558-34PRM	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J4	ch	BL8558-24PRM	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J4	ch	BL8591CB3TR24	LVR-IC	LDO, 2.4V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J4	ch	LR8558-24PRM	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J4	ci	BL8558-44PRM	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J4	ci	BL8591CB3TR44	LVR-IC	LDO, 4.4V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J4	ci	LR8558-44PRM	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J4-	-	RT9818B-15PV	Vdet-IC	1.5V±1.5%, -Reset ODO, Td=55ms	SOT-23	16vda	VD6	3a	Rct
J4A	-	ZC832A	C-diode	VHF/UHF-Tuning, 25V, 330mW, 22pF(2V), ΔC=±10%	SOT-23	16dc	-	3a	Zx
J4B	-	ZC832B	C-diode	VHF/UHF-Tuning, 25V, 330mW, 22pF(2V), ΔC=±5%	SOT-23	16dc	-	3a	Zx
J5	-	2SK67-5	n-FET	GP, 20V, 10mA, 80mW, Idss=0.1..0.2mA, Up<0.8V	SOT-23	16fh	-	3a	Nec
J5	-	AH175W	Hall-IC	Hall-efect sensor IC, Vcc=3.5..20V, Iout=25mA, OCO	SOT-23	16ha	-	3a	Ana
J5	-	AP8821N-15GC	Vdet-IC	1.5V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
J5	-	AP8821N-15GT	Vdet-IC	1.5V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
J5	-	AP8821N-15PC	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
J5	-	AP8821N-15PT	Vdet-IC	1.5V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
J5	-	BL8558-15PRM	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J5	-	BL8591CB3TR15	LVR-IC	LDO, 1.5V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J5	-	CHT807PT-R	Si-pnp	AF, Sw, 45V, 500mA, B=160..400, 100MHz	SOT-23	16ta	-	3a	Chm
J5	-	ELM7635HAB	Vdet-IC	3.5V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
J5	-	LR8558-15PRM	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J5	-	MAX809RTR	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ons
J5	-	MMBZ5250B	Z-diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 350mW	SOT-23	16dc	-	3c	Pjt



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J5	-	MMBZ5250BW	Z-diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 150mW	SOT-523	16dc	-	3a	Di
J5	-	MMBZ5250BW	Z-diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 200mW	SOT-323	16dc	-	3c	Pjt
J5	-	R3111N152C	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
J5	-	R3130N45EA	Vdet-IC	4.5V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
J5	-	SP810EK-4-4	Vdet-IC	4.4V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Sip
J5	-	TCM809RELB	Vdet-IC	2.63V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Mcc
J5	-	TCM809RENB	Vdet-IC	2.63V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
J5	-	ZC834	C-diode	VHF/UHF-Tuning, 25V, 330mW, 47pF(2V), ΔC=±20%	SOT-23	16dc	-	3a	Zx
J5	cg	BL8558-35PRM	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J5	cg	BL8591CB3TR35	LVR-IC	LDO, 3.5V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J5	cg	LR8558-35PRM	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J5	ch	BL8558-25PRM	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J5	ch	BL8591CB3TR25	LVR-IC	LDO, 2.5V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J5	ch	LR8558-25PRM	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J5	ci	BL8558-45PRM	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J5	ci	BL8591CB3TR45	LVR-IC	LDO, 4.5V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J5	ci	LR8558-45PRM	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J5-	-	RT9818B-16PV	Vdet-IC	1.6V±1.5%, -Reset ODO, Td=55ms	SOT-23	16vda	VD6	3a	Rct
J5A	-	ZC834A	C-diode	VHF/UHF-Tuning, 25V, 330mW, 47pF(2V), ΔC=±10%	SOT-23	16dc	-	3a	Zx
J5B	-	ZC834B	C-diode	VHF/UHF-Tuning, 25V, 330mW, 47pF(2V), ΔC=±5%	SOT-23	16dc	-	3a	Zx
J6	-	2SK67-6	n-FET	GP, 20V, 10mA, 80mW, Idss=0.16..0.3mA, Up<0.8V	SOT-23	16fh	-	3a	Nec
J6	-	AP8821N-16GC	Vdet-IC	1.6V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
J6	-	AP8821N-16GT	Vdet-IC	1.6V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
J6	-	AP8821N-16PC	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
J6	-	AP8821N-16PT	Vdet-IC	1.6V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
J6	-	BL8558-16PRM	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J6	-	BL8591CB3TR16	LVR-IC	LDO, 1.6V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J6	-	CHT807PT-S	Si-pnp	AF, Sw, 45V, 500mA, B=250..600, 100MHz	SOT-23	16ta	-	3a	Chm
J6	-	DRC9A23J	Si-npn-Digi	Switching, 50V, 80mA, 125mW, R1/R2=2.2k/47k	SSMini3-F3-B	18ta	-	3a	Pan
J6	-	ELM7636HAB	Vdet-IC	3.6V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
J6	-	LR8558-16PRM	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J6	-	M1MA174	Si-diode	Sw, 100V, 200mA, 200mW, Vf<1.2V(100mA), <4pF	SOT-323	16dc	-	3a	Ons
J6	-	MAX809JTR	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ons
J6	-	R3111N162C	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
J6	-	R3130N46EA	Vdet-IC	4.6V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
J6	-	TCM809JELB	Vdet-IC	4.0V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Mcc
J6	-	TCM809JENB	Vdet-IC	2.63V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
J6	-	ZC835	C-diode	VHF/UHF-Tuning, 25V, 330mW, 68pF(2V), ΔC=±20%	SOT-23	16dc	-	3a	Zx
J6	cg	BL8558-36PRM	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J6	cg	BL8591CB3TR36	LVR-IC	LDO, 3.6V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J6	cg	LR8558-36PRM	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J6	ch	BL8558-26PRM	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J6	ch	BL8591CB3TR26	LVR-IC	LDO, 2.6V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J6	ch	LR8558-26PRM	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J6-	-	RT9818A-18PV	Vdet-IC	1.8V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
J6=	-	RT9818A-18GV	Vdet-IC	1.8V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
J6A	-	ZC835A	C-diode	VHF/UHF-Tuning, 25V, 330mW, 68pF(2V), ΔC=±10%	SOT-23	16dc	-	3a	Zx
J6B	-	ZC835B	C-diode	VHF/UHF-Tuning, 25V, 330mW, 68pF(2V), ΔC=±5%	SOT-23	16dc	-	3a	Zx
J6H	-	S9014LT1-H	Si-npn	GP, 50V, 100mA, 200mW, B=450..1000, >150MHz	SOT-23	16ta	-	3a	Wtr
J6L	-	S9014LT1-L	Si-npn	GP, 50V, 100mA, 200mW, B=120..450, >150MHz	SOT-23	16ta	-	3a	Wtr
J7	-	2SK67-7	n-FET	GP, 20V, 10mA, 80mW, Idss=0.27..0.54mA, Up<0.8V	SOT-23	16fh	-	3a	Nec
J7	-	AP8821N-17GC	Vdet-IC	1.7V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
J7	-	AP8821N-17GT	Vdet-IC	1.7V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
J7	-	AP8821N-17PC	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
J7	-	AP8821N-17PT	Vdet-IC	1.7V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
J7	-	ATS177W	Hall-IC	Hall-efect sensor IC, Vcc=3.5..20V, Iout=25mA, OCO	SOT-23	16ha	-	3a	Ana
J7	-	BL8558-17PRM	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J7	-	BL8591CB3TR17	LVR-IC	LDO, 1.7V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J7	-	CHT846BPT-Q	Si-npn	AF, Sw, 65V, 100mA, B=110..220, 200MHz	SOT-23	16ta	-	3a	Chm
J7	-	DRC9A43E	Si-npn-Digi	Switching, 50V, 80mA, 125mW, R1/R2=4.7k/4.7k	SSMini3-F3-B	18ta	-	3a	Pan
J7	-	ELM7637HAB	Vdet-IC	3.7V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
J7	-	LR8558-17PRM	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J7	-	R3111N172C	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
J7	-	R3130N47EA	Vdet-IC	4.7V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
J7	-	TCM809ZELB	Vdet-IC	2.32V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Mcc
J7	-	TCM809ZENB	Vdet-IC	2.32V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
J7	-	ZC836	C-diode	VHF/UHF-Tuning, 25V, 330mW, 100pF(2V), ΔC=±20%	SOT-23	16dc	-	3a	Zx
J7	cg	BL8558-37PRM	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J7	cg	BL8591CB3TR37	LVR-IC	LDO, 3.7V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J7	cg	LR8558-37PRM	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J7	ch	BL8558-27PRM	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J7	ch	BL8591CB3TR27	LVR-IC	LDO, 2.7V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J7	ch	LR8558-27PRM	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J7-	-	RT9819A-27PVL	Vdet-IC	2.7V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Rct
J7A	-	ZC836A	C-diode	VHF/UHF-Tuning, 25V, 330mW, 100pF(2V), ΔC=±10%	SOT-23	16dc	-	3a	Zx
J7B	-	ZC836B	C-diode	VHF/UHF-Tuning, 25V, 330mW, 100pF(2V), ΔC=±5%	SOT-23	16dc	-	3a	Zx
J8	-	2SK67-8	n-FET	GP, 20V, 10mA, 80mW, Idss=0.1..1mA, Up<0.8V	SOT-23	16fh	-	3a	Nec
J8	-	AP8821N-18GC	Vdet-IC	1.8V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
J8	-	AP8821N-18GT	Vdet-IC	1.8V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
J8	-	AP8821N-18PC	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
J8	-	AP8821N-18PT	Vdet-IC	1.8V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
J8	-	AV9018LT1	Si-npn	AF-Amp, 25V, 50mA, 200mW, B=70..190, >600MHz	SOT-23	16ta	-	3a	Avi
J8	-	BCX71JR	Si-pnp	GP, Sw, 45V, 100mA, 250mW, B=250..460, >100MHz	SOT-23	16te	-	3a	Phi
J8	-	BCX71RJ	Si-pnp	GP, Sw, 45V, 100mA, 250mW, B=250..460, >100MHz	SOT-23	16ta	-	3a	Zx
J8	-	BL8558-18PRM	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J8	-	BL8591CB3TR18	LVR-IC	LDO, 1.8V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J8	-	BZX84C3V9	Z-diode	3.7..4.1V, Zzt=90Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
J8	-	ELM7638HAB	Vdet-IC	3.8V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
J8	-	LR8558-18PRM	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J8	-	R3111N182C	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
J8	-	R3130N48EA	Vdet-IC	4.8V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
J8	-	S9018LT1	Si-npn	GP, 25V, 50mA, 200mW, B=70..190, >600MHz	SOT-23	16ta	-	3a	Wtr
J8	cg	BL8558-38PRM	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J8	cg	BL8591CB3TR38	LVR-IC	LDO, 3.8V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J8	cg	LR8558-38PRM	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J8	ch	BL8558-28PRM	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J8	ch	BL8591CB3TR28	LVR-IC	LDO, 2.8V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J8	ch	LR8558-28PRM	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J8-	-	RT9818C-23PVL	Vdet-IC	2.3V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
J8H	-	S9018H	Si-npn	AM/FM-amp, 30V, 50mA, 200mW, B=105..190, >600MHz	SOT-23	16ta	-	3a	Jce
J8L	-	S9018L	Si-npn	AM/FM-amp, 30V, 50mA, 200mW, B=70..105, >600MHz	SOT-23	16ta	-	3a	Jce
J9	-	AP8821N-19GC	Vdet-IC	1.9V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
J9	-	AP8821N-19GT	Vdet-IC	1.9V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
J9	-	AP8821N-19PC	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
J9	-	AP8821N-19PT	Vdet-IC	1.9V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
J9	-	BL8558-19PRM	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J9	-	BL8591CB3TR19	LVR-IC	LDO, 1.9V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J9	-	BZX84C18	Z-diode	16.8..19.1V, Zzt=45Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
J9	-	CHT846BPT-S	Si-npn	AF, Sw, 65V, 100mA, B=420..800, 200MHz	SOT-23	16ta	-	3a	Chm
J9	-	DRC9A43X	Si-npn-Digi	Switching, 50V, 80mA, 125mW, R1/R2=4.7k/10k	SSMini3-F3-B	18ta	-	3a	Pan
J9	-	ELM7639HAB	Vdet-IC	3.9V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
J9	-	LR8558-19PRM	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J9	-	R3111N192C	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
J9	-	SST109	n-FET	Sw, 25V, 350mW, Idss=40mA, Rds(on)=12Ω, 1/4ns	SOT-23	16fj	-	3a	Six
J9	-	ZC829	C-diode	VHF/UHF-Tuning, 25V, 330mW, 8.2pF(2V), ΔC=±20%	SOT-23	16dc	-	3a	Zx
J9	cg	BL8558-39PRM	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J9	cg	BL8591CB3TR39	LVR-IC	LDO, 3.9V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J9	cg	LR8558-39PRM	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J9	ch	BL8558-29PRM	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-23	16cg	VR1	3ba	Shb
J9	ch	BL8591CB3TR29	LVR-IC	LDO, 2.9V±2%, 100mA	SOT-23	16cg	VR1	3ba	Shb
J9	ch	LR8558-29PRM	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-23	16cg	VR1	3ba	Lrc
J9-	-	RT9818C-28PV	Vdet-IC	2.8V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
J9A	-	ZC829A	C-diode	VHF/UHF-Tuning, 25V, 330mW, 8.2pF(2V), ΔC=±10%	SOT-23	16dc	-	3a	Zx
J9B	-	ZC829B	C-diode	VHF/UHF-Tuning, 25V, 330mW, 8.2pF(2V), ΔC=±5%	SOT-23	16dc	-	3a	Zx
JA	-	2SK2170	n-FET	Conv, 30V, 20mA, 100mW, Idss=1.2..4.5mA, Up<2.5V	SOT-23	16fh	-	3a	San
JA	-	ATS137W	Hall-IC	Hall-efect sensor IC, Vcc=3.5..20V, Iout=25mA, OCO	SOT-23	16ha	-	3a	Ana
JA	-	BAV70	Si-diode	Dual, Sw, 75V, 215mA, Vf<1.25V, <4ns	SOT-23	16dg	-	3a	Pjt
JA	-	BAV70W	Si-diode	Dual, Sw, 75V, 215mA, 225mW, Vf<1.25V, <4ns	SOT-323	16dg	-	3a	Pjt
JA	-	BAV74	Si-diode	Dual, Hi-Speed, 50V, 200mA, Vf<1V(100mA), 2pF, 4ns	SOT-23	16dg	-	3a	Ons
JA	-	MMBZ5241BW	Z-diode	11V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOT-323	16dc	-	3c	Jiy
JA-	-	RT9818C-34PV	Vdet-IC	3.4V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
JAp	-	BAV74	Si-diode	Dual, Hi-Speed, 50V, 215mA, Vf<1V(100mA), 1.5pF, 4ns	SOT-23	16dg	-	3a	PhH
JAt	-	BAV74	Si-diode	Dual, Hi-Speed, 50V, 215mA, Vf<1V(100mA), 1.5pF, 4ns	SOT-23	16dg	-	3a	PhM
JAW	-	BAV74	Si-diode	Dual, Hi-Speed, 50V, 215mA, Vf<1V(100mA), 1.5pF, 4ns	SOT-23	16dg	-	3a	PhC
JB	-	MMBZ5242BW	Z-diode	12V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-323	16dc	-	3c	Jiy
JB-	-	RT9818C-35PV	Vdet-IC	3.5V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
JB=	-	RT9818C-35GV	Vdet-IC	3.5V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
JBp	-	BAV73	Si-diode	Dual, Hi-Speed, 200V, 200mA, Vf<1.25V(200mA), 5pF, 5ns	SOT-23	16dg	-	3a	Phi
JBs	-	BAR74	Si-diode	Sw, 50V, 250mA, 370mW, Vf<1V(100mA), <4ns	SOT-23	16dc	-	3c	Inf
JC	-	2SC2735	Si-npn	VHF/UHF-Osc, 30V, 50mA, 150mW, B>40, 1.2GHz	SOT-23	16ta	-	3a	Ren

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JC	-	2SC4265	Si-npn	HF, 30V, 50mA, 100mW, B>40, >600MHz	CMPAK	16ta	-	3a	Ren
JC	-	2SJ125-C	p-FET	AF-Amp, 50V, Idss=1..3mA, 150mW, 4ms, Rds<220Ω	SC-59	16fa	-	3a	Mit
JC	-	2SJ145-C	p-FET	AF-Amp, 50V, Idss=1..3mA, 150mW, 4ms, Rds<200Ω	SOT-323	16fa	-	3a	Mit
JC	-	BAL74W	Si-diode	Sw, Fast, 50V, 0.25A, 250mW, <4ns	SOT-323	16dr	-	3a	Phi
JC	-	BAW56	Si-diode	Dual, Sw, 70V, 200mA, 250mW, Vf<1.25V, 2pF, <6ns	SOT-23	16df	-	3a	Pjt
JC	-	BAW56W	Si-diode	Dual, Hi-Speed, 75V, 150mA, 200mW, 2pF, 4ns	SOT-323	16df	-	3a	Pjt
JC	-	CPH3303	p-MOSFET	Sw, LogL, 20V, 1.6A, 1W, 315mΩ(0.8A), 10/32ns	CPH3	16ta	-	3a	San
JC	-	DRC9A43Z	Si-npn-Digi	Switching, 50V, 80mA, 125mW, R1/R2=4.7k/47k	SSMini3-F3-B	18ta	-	3a	Pan
JC	-	MMBZ5243BW	Z-diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 200mW	SOT-323	16dc	-	3c	Jiy
JC-	-	RT9818A-20PV	Vdet-IC	2.0V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
JC=	-	RT9818A-20GV	Vdet-IC	2.0V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
JCp	-	BAL74	Si-diode	Sw, Fast, 50V, 0.25A, 250mW, <4ns	SOT-23	16dr	-	3a	PhH
JCs	-	BAL74	Si-diode	Sw, Fast, 50V, 0.25A, 250mW, <4ns	SOT-23	16dr	-	3a	Sie
JCt	-	BAL74	Si-diode	Sw, Fast, 50V, 0.25A, 250mW, <4ns	SOT-23	16dr	-	3a	PhM
JCW	-	BAL74	Si-diode	Sw, Fast, 50V, 0.25A, 250mW, <4ns	SOT-23	16dr	-	3a	PhC
JD	-	2SJ125-D	p-FET	AF-Amp, 50V, Idss=2.5..6mA, 150mW, 4ms, Rds<220Ω	SC-59	16fa	-	3a	Mit
JD	-	2SJ145-D	p-FET	AF-Amp, 50V, Idss=2.5..6mA, 150mW, 4ms, Rds<200Ω	SOT-323	16fa	-	3a	Mit
JD	-	BAW56T	Si-diode	Dual, Hi-Speed, 85V, 150mA, 200mW, 2pF, 4ns	SOT-523	16df	-	3a	Di
JD	-	MMBZ5245BW	Z-diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 200mW	SOT-323	16dc	-	3c	Jiy
JD-	-	RT9818A-30PV	Vdet-IC	3.0V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
JD=	-	RT9818A-30GV	Vdet-IC	3.0V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
JE	-	2SJ125-E	p-FET	AF-Amp, 50V, Idss=5..12mA, 150mW, 4ms, Rds<220Ω	SC-59	16fa	-	3a	Mit
JE	-	2SJ145-E	p-FET	AF-Amp, 50V, Idss=5..12mA, 150mW, 4ms, Rds<200Ω	SOT-323	16fa	-	3a	Mit
JE	-	BAV99T	Si-diode	Dual, U-Sp, 80V, 150mA, Vf<1.2V(100mA), 0.5pF, 4ns	SOT-523	16dl	-	3a	Di
JE	-	CH228KPT	Si-diode	Dual, Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	SOT-23	16dl	-	3a	Chm
JE	-	MMBZ5246BW	Z-diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 200mW	SOT-323	16dc	-	3c	Jiy
JE-	-	RT9818C-18PV	Vdet-IC	1.8V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
JE=	-	RT9818C-18GV	Vdet-IC	1.8V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
JE1	-	CHDTA123JEPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/47k	SOT-416	16ta	-	3a	Chm
JEA	-	CHDTC123JEPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/47k	SOT-416	16ta	-	3a	Chm
JF	-	BAL99L	Si-diode	Sw, Fast, 75V, 0.25A, 250mW, <4ns	SOT-23	16dr	-	3a	Ons
JF	-	BAL99W	Si-diode	Sw, Fast, 75V, 150mA, 200mW, Vf<1.25V(150mA), <4ns	SOT-323	16dr	-	3a	Phi
JF	-	DRC9A43T	Si-npn-Digi	Switching, 50V, 80mA, 125mW, R1=4.7k	SSMini3-F3-B	18ta	-	3a	Pan
JF	-	MMBZ5248BW	Z-diode	18V±5%, Izt=7.0mA, Zzt=23Ω, 200mW	SOT-323	16dc	-	3c	Jiy
JF-	-	RT9818F-20PVL	Vdet-IC	2.0V±1.5%, +Reset ODO, Td=55ms	SOT-23	16vdc	VD6	3a	Rct
JFp	-	BAL99	Si-diode	Sw, Fast, 75V, 0.25A, 250mW, <4ns	SOT-23	16dr	-	3a	PhH
JFs	-	BAL99	Si-diode	Sw, Fast, 75V, 0.25A, 250mW, <4ns	SOT-23	16dr	-	3a	Sie
JFt	-	BAL99	Si-diode	Sw, Fast, 75V, 0.25A, 250mW, <4ns	SOT-23	16dr	-	3a	PhM
JFW	-	BAL99	Si-diode	Sw, Fast, 75V, 0.25A, 250mW, <4ns	SOT-23	16dr	-	3a	PhC
JG	-	2SK208-GR	n-FET	AF-Amp, 50V, 10mA, 100mW, Idss=2.6..6.5mA	SOT-23	16fa	-	3a	Tos
JG	-	2SK879-GR	n-FET	AF-Amp, 50V, 10mA, 100mW, Idss=2.6..6.5mA, Up<5V	SOT-323	16fa	-	3a	Tos
JG	-	BAV99	Si-diode	Dual, U-Sp, 80V, 150mA, Vf<1.2V(100mA), 0.5pF, 4ns	SOT-23	16dl	-	3a	Pjt
JG	-	BAV99W	Si-diode	Dual, U-Sp, 75V, 125mA, Vf<1.2V(100mA), 0.5pF, 4ns	SOT-323	16dl	-	3a	Pjt
JG-	-	RT9818B-27PV	Vdet-IC	2.7V±1.5%, -Reset ODO, Td=55ms	SOT-23	16vda	VD6	3a	Rct
JGs	-	BAR99	Si-diode	Sw, 70V, 250mA, 370mW, Vf<1.25V(150mA), <6ns	SOT-23	16dc	-	3a	Sie
JH	-	DRC9A14E	Si-npn-Digi	Switching, 50V, 80mA, 125mW, R1/R2=10k/10k	SSMini3-F3-B	18ta	-	3a	Pan
JH	-	MMBZ5250BW	Z-diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 200mW	SOT-323	16dc	-	3c	Jiy
JH-	-	RT9818C-27PVL	Vdet-IC	2.7V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vdc	VD6	3a	Rct
JH=	-	RT9818C-27GVL	Vdet-IC	2.7V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vdc	VD6	3a	Rct
JID	-	2SA1566-D	Si-pnp	AF-Amp, 120V, 100mA, B=60..120, 120MHz	SOT-23	16ta	-	3a	Ren
JIE	-	2SA1566-E	Si-pnp	AF-Amp, 120V, 100mA, B=150..300, 120MHz	SOT-23	16ta	-	3a	Ren
JJ	-	2SK1839	n-MOSFET	Sw, 30V, 100mA, 150mW, <15Ω(10mA), 12pF	MCP	16fi	-	3a	San
JJ	-	2SK1840	n-MOSFET	Sw, 30V, 100mA, 200mW, <15Ω(10mA), 12pF	SOT-23	16fi	-	3a	San
JJ	-	BAV70	Si-diode	Dual, Sw, 75V, 215mA, Vf<1.25V, <4ns	SOT-23	16dg	-	3a	Sie
JJ	-	BAV70T	Si-diode	Dual, Sw, 75V, 150mA, 200mW, Vf<1.25V, <4ns	SOT-523	16dg	-	3a	Di
JJ	-	DRC9A14Y	Si-npn-Digi	Switching, 50V, 80mA, 125mW, R1/R2=10k/47k	SSMini3-F3-B	18ta	-	3a	Pan
JJ	-	DZ23C2V7	Z-diode	Dual, 2.5..2.9V, Izt=5mA, Zzt=75Ω, 300mW	SOT-23	16dg	-	3a	Lge
JJ	-	ETC810JU	Vdet-IC	4.0V±2%, +Reset PPO	SOT-23	16vdc	VD7	3a	Etc
JJ	-	MIC810JBC3	Vdet-IC	4.0V±5%, +Reset PPO	SC-70	16vdc	VD7	3a	Mcr
JJ	-	MIC810JU	Vdet-IC	4.0V±5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
JJ	-	MMBZ5251BW	Z-diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 200mW	SOT-323	16dc	-	3c	Jiy
JJ	cb	MIC810JUY	Vdet-IC	4.0V±5%, +Reset PPO, Pb-free	SOT-23	16vdc	VD7	3a	Mcr
JJ	cb	MIC810JYC3	Vdet-IC	4.0V±5%, +Reset PPO, Pb-free	SC-70	16vdc	VD7	3a	Mcr
JJ-	-	RT9818D-27PVL	Vdet-IC	2.7V±1.5%, -Reset ODO, Td=450ms	SOT-23	16vdc	VD6	3a	Rct
JK	-	DZ23C3V0	Z-diode	Dual, 2.8..3.2V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3a	Lge
JK	-	ELM7619HDB	Vdet-IC	1.9V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
JK	-	MMBZ5252BW	Z-diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 200mW	SOT-323	16dc	-	3c	Jiy
JK-	-	RT9819A-33PV	Vdet-IC	3.3V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
JK1	-	CHDTA123JKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/47k	SOT-23	16ta	-	3a	Chm
JK2	-	CHDTB122JKPT	Si-pnp-Digi	Sw, 50V, 500mA, 200MHz, R1/R2=220R/4.7k	SOT-23	16ta	-	3a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JKA	-	CHDTC123JKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/47k	SOT-23	16ta	-	3a	Chm
JKB	-	CHDTD122JKPT	Si-npn-Digi	Sw, 50V, 500mA, 250MHz, R1/R2=220R/4.7k	SOT-23	16ta	-	3a	Chm
JL	-	2SA1508	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, B>100, R1=47k	CP	16ta	-	3a	San
JL	-	DRC9A14T	Si-npn-Digi	Switching, 50V, 80mA, 125mW, R1=10k	SSMini3-F3-B	18ta	-	3a	Pan
JL	-	ETC810LU	Vdet-IC	4.63V±2%, +Reset PPO	SOT-23	16vdc	VD7	3a	Etc
JL	-	MIC810LBC3	Vdet-IC	4.63V±5%, +Reset PPO	SC-70	16vdc	VD7	3a	Mcr
JL	-	MIC810LU	Vdet-IC	4.63V±5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
JL	cb	MIC810LUY	Vdet-IC	4.63V±5%, +Reset PPO, Pb-free	SOT-23	16vdc	VD7	3a	Mcr
JL	cb	MIC810LYC3	Vdet-IC	4.63V±5%, +Reset PPO, Pb-free	SC-70	16vdc	VD7	3a	Mcr
JL-	-	RT9818D-27PV	Vdet-IC	2.7V±1.5%, -Reset ODO, Td=450ms	SOT-23	16vda	VD6	3a	Rct
jm	-	PT7M7809JT	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Pti
jm	cv	PT7M7809JTE	Vdet-IC	4.0V±1.5%, -Reset PPO, Lead free	SOT-23	16vdc	VD7	3b	Pti
JM	-	2SC2059K-M	Si-npn	RF-amp, 25V, 20mA, 150mW, B=39..82, >500MHz	SC-59	16ta	-	3a	Rhm
JM	-	2SC4099-M	Si-npn	HF, 25V, 20mA, 150mW, B=39..82, >500MHz	SOT-323	16ta	-	3a	Rhm
JM	-	2SC4649-M	Si-npn	RF-amp, 25V, 20mA, 150mW, B=39..82, >500MHz	EM3	16ta	-	3a	Rhm
JM	-	DZ23C3V3	Z-diode	Dual, 3.1..3.5V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3a	Lge
JM	-	ETC810MU	Vdet-IC	4.38V±2%, +Reset PPO	SOT-23	16vdc	VD7	3a	Etc
JM	-	MIC810MBC3	Vdet-IC	4.38V±5%, +Reset PPO	SC-70	16vdc	VD7	3a	Mcr
JM	-	MIC810MU	Vdet-IC	4.38V±5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
JM	-	MMBZ5254BW	Z-diode	27V±5%, Izt=5.0mA, Zzt=41Ω, 200mW	SOT-323	16dc	-	3c	Jiy
JM	cb	MIC810MUY	Vdet-IC	4.38V±5%, +Reset PPO, Pb-free	SOT-23	16vdc	VD7	3a	Mcr
JM	cb	MIC810MYC3	Vdet-IC	4.38V±5%, +Reset PPO, Pb-free	SC-70	16vdc	VD7	3a	Mcr
JM-	-	RT9818E-36PV	Vdet-IC	3.6V±1.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Rct
JN	-	2SC2059K-N	Si-npn	RF-amp, 25V, 20mA, 150mW, B=56..120, >500MHz	SC-59	16ta	-	3a	Rhm
JN	-	2SC4099-N	Si-npn	HF, 25V, 20mA, 150mW, B=56..120, >500MHz	SOT-323	16ta	-	3a	Rhm
JN	-	2SC4649-N	Si-npn	RF-amp, 25V, 20mA, 150mW, B=56..120, >500MHz	EM3	16ta	-	3a	Rhm
JN	-	2SC4909	Si-npn-Digi	Mute, Drv, 25V, 100mA, 200mW, 240MHz, R1/R2=47k/47k	MCP	16ta	-	3a	San
JN	-	DRC9A24E	Si-npn-Digi	Switching, 50V, 80mA, 125mW, R1/R2=22k/22k	SSMini3-F3-B	18ta	-	3a	Pan
JN	-	DZ23C3V6	Z-diode	Dual, 3.4..3.8V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3a	Lge
JN	-	MMBZ5256BW	Z-diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 200mW	SOT-323	16dc	-	3c	Jiy
JN-	-	RT9819F-34PVL	Vdet-IC	3.4V±1.5%, +Reset PPO, Td=55ms	SOT-23	16vda	VD7	3a	Rct
JO	-	2SK208-O	n-FET	AF-Amp, 50V, 10mA, 100mW, Idss=0.6..1.4mA	SOT-23	16fa	-	3a	Tos
JO	-	2SK879-O	n-FET	AF-Amp, 50V, 10mA, 100mW, Idss=0.6..1.4mA, Up<5V	SOT-323	16fa	-	3a	Tos
JP	-	2SC2059K-P	Si-npn	RF-amp, 25V, 20mA, 150mW, B=82..180, >500MHz	SC-59	16ta	-	3a	Rhm
JP	-	2SC4099-P	Si-npn	HF, 25V, 20mA, 150mW, B=82..180, >500MHz	SOT-323	16ta	-	3a	Rhm
JP	-	2SC4649-P	Si-npn	RF-amp, 25V, 20mA, 150mW, B=82..180, >500MHz	EM3	16ta	-	3a	Rhm
JP	-	BAS19	Si-diode	Sw, Fast, 120V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	Gal
JP	-	DZ23C3V9	Z-diode	Dual, 3.7..4.1V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3a	Lge
JP	-	MMBZ5257BW	Z-diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 200mW	SOT-323	16dc	-	3c	Jiy
JP-	-	RT9818D-29PV	Vdet-IC	2.9V±1.5%, -Reset ODO, Td=450ms	SOT-23	16vda	VD6	3a	Rct
JPp	-	BAS19	Si-diode	Sw, Fast, 120V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	PhH
JPs	-	BAS19	Si-diode	Sw, Fast, 120V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	Sie
JPt	-	BAS19	Si-diode	Sw, Fast, 120V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	PhM
JPW	-	BAS19	Si-diode	Sw, Fast, 120V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	PhC
JQ-	-	RT9818D-42PV	Vdet-IC	4.2V±1.5%, -Reset ODO, Td=450ms	SOT-23	16vda	VD6	3a	Rct
JR	-	2SK208-R	n-FET	AF-Amp, 50V, 10mA, 100mW, Idss=0.3..0.75mA	SOT-23	16fa	-	3a	Tos
JR	-	2SK879-R	n-FET	AF-Amp, 50V, 10mA, 100mW, Idss=0.3..0.75mA, Up<5V	SOT-323	16fa	-	3a	Tos
JR	-	AP7333-10SA	LVR-IC	LDO, 1.0V±2%, 300mA	SOT-23	16vj	VR1	3ba	Di
JR	-	BAS20	Si-diode	Sw, Fast, 150V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	Gal
JR	-	CAT809JSDI-GT3	Vdet-IC	4.0V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3d	Ons
JR	-	CAT809JTBI-GT3	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
JR	-	DZ23C4V3	Z-diode	Dual, 4.0..4.6V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3a	Lge
JR	-	ETC810RU	Vdet-IC	2.63V±2%, +Reset PPO	SOT-23	16vdc	VD7	3a	Etc
JR	-	MIC810RBC3	Vdet-IC	2.63V±5%, +Reset PPO	SC-70	16vdc	VD7	3a	Mcr
JR	-	MIC810RU	Vdet-IC	2.63V±5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
JR	-	MMBZ5258BW	Z-diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 200mW	SOT-323	16dc	-	3c	Jiy
JR	cb	MIC810RUY	Vdet-IC	2.63V±5%, +Reset PPO, Pb-free	SOT-23	16vdc	VD7	3a	Mcr
JR	cb	MIC810RYC3	Vdet-IC	2.63V±5%, +Reset PPO, Pb-free	SC-70	16vdc	VD7	3a	Mcr
JR-	-	2SC5773	Si-npn	UHF/VHF WB-amp, 15V, 80mA, 750mW, 10.8GHz, B=80..160	MPAK	16ta	-	3a	Ren
JR-	-	RT9819C-12PV	Vdet-IC	1.2V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
JRp	-	BAS20	Si-diode	Sw, Fast, 150V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	PhH
JRs	-	BAS20	Si-diode	Sw, Fast, 150V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	Sie
JRt	-	BAS20	Si-diode	Sw, Fast, 150V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	PhM
JRW	-	BAS20	Si-diode	Sw, Fast, 150V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	PhC
js	-	PT7M6218CLC3	Vdet-IC	1.8V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
js	-	PT7M6218CLTA3	Vdet-IC	1.8V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
js	cf	PT7M6218CLC3E	Vdet-IC	1.8V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
js	cf	PT7M6218CLTA3E	Vdet-IC	1.8V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
JS	-	AP7333-12SA	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16vj	VR1	3ba	Di
JS	-	BAS21	Si-diode	Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	Gal





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JS	-	BAS21L	Si-diode	Sw, 250V, 250mA, Vf<1.25V(200mA), 50ns	SOT-23	16dc	-	3b	Ons
JS	-	BAS21SL	Si-diode	Dual, Sw, Fast, 250V, 250mA, 250mW, <50ns	SOT-23	16dl	-	3b	Ons
JS	-	CAT810JSDI-GT3	Vdet-IC	4.0V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3d	Ons
JS	-	CAT810JTBI-GT3	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ons
JS	-	ETC810SU	Vdet-IC	2.93V±2%, +Reset PPO	SOT-23	16vdc	VD7	3a	Etc
JS	-	MIC810SBC3	Vdet-IC	2.93V±5%, +Reset PPO	SC-70	16vdc	VD7	3a	Mcr
JS	-	MIC810SU	Vdet-IC	2.93V±5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
JS	-	TCM809ZVLB	Vdet-IC	2.32V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Mcc
JS	cb	MIC810SUY	Vdet-IC	2.93V±5%, +Reset PPO, Pb-free	SOT-23	16vdc	VD7	3a	Mcr
JS	cb	MIC810SYC3	Vdet-IC	2.93V±5%, +Reset PPO, Pb-free	SC-70	16vdc	VD7	3a	Mcr
JS-	-	RT9818C-42PV	Vdet-IC	4.2V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
JS=	-	RT9818C-42GV	Vdet-IC	4.2V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
JS2	-	BAS21A	Si-diode	Dual, Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16df	-	3a	Gal
JS3	-	2SA1815-3	Si-pnp	RF, FM, IF-Amp, 15V, 50mA, 250mW, B=60..120, 750MHz	SOT-23	16ta	-	3a	San
JS3	-	2SA1857-3	Si-pnp	RF, FM, IF-Amp, 15V, 50mA, 150mW, B=60..120, 750MHz	MCP	16ta	-	3a	San
JS3	-	BAS21C	Si-diode	Dual, Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dg	-	3a	Gal
JS4	-	2SA1815-4	Si-pnp	RF, FM, IF-Amp, 15V, 50mA, 250mW, B=90..180, 750MHz	SOT-23	16ta	-	3a	San
JS4	-	2SA1857-4	Si-pnp	RF, FM, IF-Amp, 15V, 50mA, 150mW, B=90..180, 750MHz	MCP	16ta	-	3a	San
JS4	-	BAS21S	Si-diode	Dual, Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dl	-	3a	Gal
JS5	-	2SA1815-5	Si-pnp	RF, FM, IF-Amp, 15V, 50mA, 250mW, B=135..270, 750MHz	SOT-23	16ta	-	3a	San
JS5	-	2SA1857-5	Si-pnp	RF, FM, IF-Amp, 15V, 50mA, 150mW, B=135..270, 750MHz	MCP	16ta	-	3a	San
JSp	-	BAS21	Si-diode	Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	Phi
JSs	-	BAS21	Si-diode	Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	Sie
JSt	-	BAS21	Si-diode	Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	PhM
jt	-	PT7M6218CHC3	Vdet-IC	1.8V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
jt	-	PT7M6218CHTA3	Vdet-IC	1.8V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
jt	cf	PT7M6218CHC3E	Vdet-IC	1.8V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
jt	cf	PT7M6218CHTA3E	Vdet-IC	1.8V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
JT	-	AP7333-15SA	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16vj	VR1	3ba	Di
JT	-	BAS21SL	Si-diode	Dual, Sw, 250V, 250mA, Vf<1.25V(200mA), 50ns	SOT-23	16dl	-	3b	Ons
JT	-	ETC810TU	Vdet-IC	3.08V±2%, +Reset PPO	SOT-23	16vdc	VD7	3a	Etc
JT	-	MIC810TBC3	Vdet-IC	3.08V±5%, +Reset PPO	SC-70	16vdc	VD7	3a	Mcr
JT	-	MIC810TU	Vdet-IC	3.08V±5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
JT	-	TCM809JVLB	Vdet-IC	4.0V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Mcc
JT	-	TCM809JVNB	Vdet-IC	2.63V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
JT	cb	MIC810TUY	Vdet-IC	3.08V±5%, +Reset PPO, Pb-free	SOT-23	16vdc	VD7	3a	Mcr
JT	cb	MIC810TYC3	Vdet-IC	3.08V±5%, +Reset PPO, Pb-free	SC-70	16vdc	VD7	3a	Mcr
JT-	-	RT9818A-33PV	Vdet-IC	3.3V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
JT15	-	AMC7637-1.5DBF	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3b	Adt
JT18	-	AMC7637-1.8DBF	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3b	Adt
JT2	-	2SC4269-2	Si-npn	VHF/UHF-Osc, 30V, 50mA, 250mW, B=40..80, 1.2GHz	SOT-23	16ta	-	3a	San
JT2	-	2SC4406-2	Si-npn	UHF, Mix/Osc, 30V, 50mA, 150mW, B=40..80, 1.2GHz	MCP	16ta	-	3a	San
JT25	-	AMC7637-2.5DBF	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3b	Adt
JT3	-	2SC4269-3	Si-npn	VHF/UHF-Osc, 30V, 50mA, 250mW, B=60..120, 1.2GHz	SOT-23	16ta	-	3a	San
JT3	-	2SC4406-3	Si-npn	UHF, Mix/Osc, 30V, 50mA, 150mW, B=60..120, 1.2GHz	MCP	16ta	-	3a	San
JT30	-	AMC7637-3.0DBF	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3b	Adt
JT33	-	AMC7637-3.3DBF	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3b	Adt
JT4	-	2SC4269-4	Si-npn	VHF/UHF-Osc, 30V, 50mA, 250mW, B=100..200, 1.2GHz	SOT-23	16ta	-	3a	San
JT4	-	2SC4406-4	Si-npn	UHF, Mix/Osc, 30V, 50mA, 150mW, B=100..200, 1.2GHz	MCP	16ta	-	3a	San
ju	-	PT7M6218NLC3	Vdet-IC	1.8V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
ju	-	PT7M6218NLTA3	Vdet-IC	1.8V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
ju	cf	PT7M6218NLC3E	Vdet-IC	1.8V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
ju	cf	PT7M6218NLTA3E	Vdet-IC	1.8V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
JU	-	AP7333-18SA	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16vj	VR1	3ba	Di
JU	-	TCM809RVLB	Vdet-IC	2.63V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Mcc
JU	-	TCM809RVNB	Vdet-IC	2.63V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
JU-	-	RT9818D-30PV	Vdet-IC	3.0V±1.5%, -Reset ODO, Td=450ms	SOT-23	16vda	VD6	3a	Rct
JU=	-	RT9818D-30GV	Vdet-IC	3.0V±1.5%, -Reset ODO, Td=450ms	SOT-23	16vda	VD6	3a	Rct
JU1	-	CHDTA123JUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/47k	SOT-323	16ta	-	3a	Chm
JUA	-	CHDTC123JUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/47k	SOT-323	16ta	-	3a	Chm
jv	-	PT7M6219CLC3	Vdet-IC	1.9V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
jv	-	PT7M6219CLTA3	Vdet-IC	1.9V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
jv	cf	PT7M6219CLC3E	Vdet-IC	1.9V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
jv	cf	PT7M6219CLTA3E	Vdet-IC	1.9V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
JV	-	1SV263	PIN-diode	VHF/UHF-AGC, 50V, 50mA, 100mW, 0.23pF, 2.5Ω(100MHz)	MCP	16dc	-	3a	San
JV	-	1SV266	PIN-diode	VHF/UHF-AGC, 50V, 50mA, 100mW, 0.23pF, 2.5Ω(100MHz)	SOT-23	16dc	-	3a	San
JV	-	AP7333-20SA	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16vj	VR1	3ba	Di
JV	-	BAS116L	Si-diode	Sw, 85V, 215mA, 225mW, Vf<1.25V(150mA), >3µs, 2pF	SOT-23	16dc	-	3a	Ons
JV	-	TCM809SVLB	Vdet-IC	2.93V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Mcc
JV	-	TCM809SVNB	Vdet-IC	2.93V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JV-	-	RT9818D-33PV	Vdet-IC	3.3V±1.5%, -Reset ODO, Td=450ms	SOT-23	16vda	VD6	3a	Rct
JV=	-	RT9818D-33GV	Vdet-IC	3.3V±1.5%, -Reset ODO, Td=450ms	SOT-23	16vda	VD6	3a	Rct
JV3	-	BAT54	Si-diode	SBR, 30V, 200mA, Vf<0.52V(100mA), <5ns	SOT-23	16dc	-	3a	Ons
JVp	-	BAS116	Si-diode	Sw, 85V, 215mA, 225mW, Vf<1.25V(150mA), >3µs, 2pF	SOT-23	16dc	-	3a	PhH
JVs	-	BAS116	Si-diode	Sw, 85V, 215mA, 225mW, Vf<1.25V(150mA), >3µs, 2pF	SOT-23	16dc	-	3c	Inf
JVt	-	BAS116	Si-diode	Sw, 85V, 215mA, 225mW, Vf<1.25V(150mA), >3µs, 2pF	SOT-23	16dc	-	3a	PhM
JVW	-	BAS116	Si-diode	Sw, 85V, 215mA, 225mW, Vf<1.25V(150mA), >3µs, 2pF	SOT-23	16dc	-	3a	PhC
jw	-	PT7M6219CHC3	Vdet-IC	1.9V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
jw	-	PT7M6219CHTA3	Vdet-IC	1.9V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
jw	cf	PT7M6219CHC3E	Vdet-IC	1.9V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
jw	cf	PT7M6219CHTA3E	Vdet-IC	1.9V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
JW	-	AP7333-25SA	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16vj	VR1	3ba	Di
JW-	-	RT9819C-23PV	Vdet-IC	2.3V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
jx	-	PT7M6219NLC3	Vdet-IC	1.9V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
jx	-	PT7M6219NLTA3	Vdet-IC	1.9V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
jx	cf	PT7M6219NLC3E	Vdet-IC	1.9V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
jx	cf	PT7M6219NLTA3E	Vdet-IC	1.9V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
JX	-	AP7333-28SA	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16vj	VR1	3ba	Di
JX	-	DRC9A44W	Si-npn-Digi	Switching, 50V, 80mA, 125mW, R1/R2=47k/22k	SSMini3-F3-B	18ta	-	3a	Pan
JX	-	DZ23C4V7	Z-diode	Dual, 4.4..5.0V, Izt=5mA, Zzt=70Ω, 300mW	SOT-23	16dg	-	3a	Lge
JX	-	MMBZ5259BW	Z-diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 200mW	SOT-323	16dc	-	3c	Jiy
JX	-	TCM809TVLB	Vdet-IC	3.08V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Mcc
JX	-	TCM809TVNB	Vdet-IC	3.08V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
JX12	-	LC1458CB3TR12	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX13	-	LC1458CB3TR13	LVR-IC	LDO, 1.3V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX14	-	LC1458CB3TR14	LVR-IC	LDO, 1.4V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX15	-	LC1458CB3TR15	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX16	-	LC1458CB3TR16	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX17	-	LC1458CB3TR17	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX18	-	LC1458CB3TR18	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX19	-	LC1458CB3TR19	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX20	-	LC1458CB3TR20	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX21	-	LC1458CB3TR21	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX22	-	LC1458CB3TR22	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX23	-	LC1458CB3TR23	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX24	-	LC1458CB3TR24	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX25	-	LC1458CB3TR25	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX26	-	LC1458CB3TR26	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX27	-	LC1458CB3TR27	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX28	-	LC1458CB3TR28	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX29	-	LC1458CB3TR29	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX30	-	LC1458CB3TR30	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX31	-	LC1458CB3TR31	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX32	-	LC1458CB3TR32	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX33	-	LC1458CB3TR33	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX34	-	LC1458CB3TR34	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX35	-	LC1458CB3TR35	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX36	-	LC1458CB3TR36	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX37	-	LC1458CB3TR37	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX38	-	LC1458CB3TR38	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX39	-	LC1458CB3TR39	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX40	-	LC1458CB3TR40	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX41	-	LC1458CB3TR41	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX42	-	LC1458CB3TR42	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX43	-	LC1458CB3TR43	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX44	-	LC1458CB3TR44	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
JX45	-	LC1458CB3TR45	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-23	16cg	VR1	3a	Lch
jy	-	PT7M6220CLC3	Vdet-IC	2.0V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
jy	-	PT7M6220CLTA3	Vdet-IC	2.0V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
jy	cf	PT7M6220CLC3E	Vdet-IC	2.0V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
jy	cf	PT7M6220CLTA3E	Vdet-IC	2.0V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
JY	-	2SK208-Y	n-FET	AF-Amp, 50V, 10mA, 100mW, Idss=1.2..3mA	SOT-23	16fa	-	3a	Tos
JY	-	2SK879-Y	n-FET	AF-Amp, 50V, 10mA, 100mW, Idss=1.2..3mA, Up<5V	SOT-323	16fa	-	3a	Tos
JY	-	AP7333-30SA	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16vj	VR1	3ba	Di
JY	-	BAV199	Si-diode	Dual, Sw, 70V, 215mA, 225mW, <2pF, <3µs	SOT-23	16dl	-	3a	Ons
JY	-	BAV199W	Si-diode	Dual, Sw, 70V, 135mA, 150mW, <2pF, <3µs	SOT-323	16dl	-	3a	PhH
JY	-	DRC9A44E	Si-npn-Digi	Switching, 50V, 80mA, 125mW, R1/R2=47k/47k	SSMini3-F3-B	18ta	-	3a	Pan
JY	-	DZ23C5V1	Z-diode	Dual, 4.8..5.4V, Izt=5mA, Zzt=30Ω, 300mW	SOT-23	16dg	-	3a	Lge
JY	-	TCM809MVLB	Vdet-IC	4.38V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Mcc
JY	-	TCM809MVNB	Vdet-IC	4.38V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JY2	-	2SC3770-2	Si-npn	VHF/UHF, 30V, 30mA, 250mW, 1.2GHz, B=40..80	SOT-23	16ta	-	3a	San
JY3	-	2SC3770-3	Si-npn	VHF/UHF, 30V, 30mA, 250mW, 1.2GHz, B=60..120	SOT-23	16ta	-	3a	San
JY4	-	2SC3770-4	Si-npn	VHF/UHF, 30V, 30mA, 250mW, 1.2GHz, B=100..200	SOT-23	16ta	-	3a	San
JYp	-	BAV199	Si-diode	Dual, Sw, 75V, 215mA, 225mW, <2pF, <3µs	SOT-23	16dl	-	3a	PhH
JYt	-	BAV199	Si-diode	Dual, Sw, 75V, 215mA, 225mW, <2pF, <3µs	SOT-23	16dl	-	3a	PhM
JYt	-	BAV199W	Si-diode	Dual, Sw, 75V, 135mA, 150mW, <2pF, <3µs	SOT-323	16dl	-	3a	PhM
JYW	-	BAV199	Si-diode	Dual, Sw, 75V, 215mA, 225mW, <2pF, <3µs	SOT-23	16dl	-	3a	PhC
JYW	-	BAV199W	Si-diode	Dual, Sw, 70V, 135mA, 150mW, <2pF, <3µs	SOT-323	16dl	-	3a	PhC
jz	-	PT7M6220CHC3	Vdet-IC	2.0V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
jz	-	PT7M6220CHTA3	Vdet-IC	2.0V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
jz	cf	PT7M6220CHC3E	Vdet-IC	2.0V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
jz	cf	PT7M6220CHTA3E	Vdet-IC	2.0V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
JZ	-	AP7333-33SA	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16vj	VR1	3ba	Di
JZ	-	BAW156	Si-diode	Dual, Sw, 82V, 160mA, 250mW, 3pF, 3µs	SOT-23	16df	-	3a	Mot
JZ	-	DRC9A15E	Si-npn-Digi	Switching, 50V, 80mA, 125mW, R1/R2=100k/100k	SSMini3-F3-B	18ta	-	3a	Pan
JZ	-	DZ23C5V6	Z-diode	Dual, 5.2..6.0V, Izt=5mA, Zzt=10Ω, 300mW	SOT-23	16dg	-	3a	Lge
JZ	-	TCM809LVLB	Vdet-IC	4.63V±2%, -Reset PPO	SC-70	16vdc	VD7	3b	Mcc
JZ	-	TCM809LVNB	Vdet-IC	4.63V±2%, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
JZ-	-	RT9819B-25PVL	Vdet-IC	2.5V±1.5%, -Reset PPO, Td=55ms	SOT-23	16vda	VD7	3a	Rct
JZp	-	BAW156	Si-diode	Dual, Sw, 82V, 160mA, 250mW, 3pF, 3µs	SOT-23	16df	-	3a	PhH
JZt	-	BAW156	Si-diode	Dual, Sw, 82V, 160mA, 250mW, 3pF, 3µs	SOT-23	16df	-	3a	PhM
JZW	-	BAW156	Si-diode	Dual, Sw, 82V, 160mA, 250mW, 3pF, 3µs	SOT-23	16df	-	3a	PhC
k	-	AX6902DA	Vdet-IC	3.08V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Axl
K	-	DA204K	Si-diode	Dual, Sw, 20V, 200mA, 200mW, Vf<1V(10mA)	SOT-346	16dl	-	3i	Rhm
K	-	DA204U	Si-diode	Dual, Sw, 20V, 200mA, 200mW, Vf<1V(10mA)	UMD3	16dl	-	3i	Rhm
K	-	DA221	Si-diode	Dual, Sw, 20V, 200mA, 150mW, Vf<1V(10mA)	SOT-416	16dl	-	3i	Rhm
K	-	DA221M	Si-diode	Dual, Sw, 20V, 200mA, 150mW, Vf<1V(10mA)	VMD3	16dl	-	3j	Rhm
K	-	SB007W03C	Si-diode	Dual, SBR, HF, 30V, 70mA, Vf<0.55V(70mA), 3pF, 10ns	CP	16dg	-	3a	San
K	-	SB007W03Q	Si-diode	Dual, SBR, HF, 30V, 70mA, Vf<0.55V(70mA), 3pF, 10ns	MCP	16dg	-	3a	San
K	cr	ELM7531NEB	Vdet-IC	3.1V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
K	cs	ELM7531CEB	Vdet-IC	3.1V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
K0	-	AP8821N-20GC	Vdet-IC	2.0V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
K0	-	AP8821N-20GT	Vdet-IC	2.0V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
K0	-	AP8821N-20PC	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
K0	-	AP8821N-20PT	Vdet-IC	2.0V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
K0	-	ELM7640HAB	Vdet-IC	4.0V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
K0	-	R3111N202C	Vdet-IC	2V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
K0	-	R3130N26EA3	Vdet-IC	2.6V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
K0-	-	RT9818C-29PVL	Vdet-IC	2.9V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
K0=	-	RT9818C-29GVL	Vdet-IC	2.9V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vdc	VD6	3a	Rct
K1	-	2SK57-1	n-FET	GP, 20V, 20mA, 100mV, Idss=0.5..1.5mA, Up<4V	SOT-23	16fa	-	3a	Nec
K1	-	A102WFT-3.3	LVR-IC	LDO, 3.3V±1.5%, 300mA	SOT-23	16cg	VR1	3b	Adt
K1	-	AP8821N-21GC	Vdet-IC	2.1V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
K1	-	AP8821N-21GT	Vdet-IC	2.1V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
K1	-	AP8821N-21PC	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
K1	-	AP8821N-21PT	Vdet-IC	2.1V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
K1	-	ELM7641HAB	Vdet-IC	4.1V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
K1	-	MAX810LTR	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ons
K1	-	MMBZ5251B	Z-diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 350mW	SOT-23	16dc	-	3c	Pjt
K1	-	MMBZ5251BW	Z-diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 150mW	SOT-523	16dc	-	3a	Di
K1	-	MMBZ5251BW	Z-diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 200mW	SOT-323	16dc	-	3c	Pjt
K1	-	R3111N212C	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
K1	-	R3130N29EA3	Vdet-IC	2.9V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
K1	-	TCM810LENB	Vdet-IC	4.63V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
K1-	-	RT9818E-30PV	Vdet-IC	3.0V±1.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Rct
K1=	-	RT9818E-30GV	Vdet-IC	3.0V±1.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Rct
K14	-	2SK238-14	n-FET	FM-VCO/Mix/Osc, 20V, 10mA, 150mW, Idss=0.5..1.5mA, Up<2.5V	SOT-23	16fi	-	3a	Nec
K14	-	DTA114GE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R2=10k	SOT-416	16ta	-	3a	Rhm
K14	-	DTA114GKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R2=10k	SOT-346	16ta	-	3a	Rhm
K14	-	DTA114GUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R2=10k	UMT3	16ta	-	3a	Rhm
K15	-	2SK238-15	n-FET	FM-VCO/Mix/Osc, 20V, 10mA, 150mW, Idss=1..3mA, Up<2.5V	SOT-23	16fi	-	3a	Nec
K15	-	DTA124GE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R2=22k	SOT-416	16ta	-	3a	Rhm
K15	-	DTA124GKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=22k	SOT-346	16ta	-	3a	Rhm
K15	-	DTA124GUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B>56, >250MHz, R2=22к	SOT-323	16ta	-	3a	Rhm
K16	-	2SK238-16	n-FET	FM-VCO/Mix/Osc, 20V, 10mA, 150mW, Idss=2..6mA, Up<2.5V	SOT-23	16fi	-	3a	Nec
K16	-	DTA144GKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=47k	SOT-346	16ta	-	3a	Rhm
K16	-	DTA144GUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=47k	UMT3	16ta	-	3a	Rhm
K17	-	2SK238-17	n-FET	FM-VCO/Mix/Osc, 20V, 10mA, 150mW, Idss=4..12mA, Up<2.5V	SOT-23	16fi	-	3a	Nec
K19	-	DTA115GKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R2=100k	SOT-346	16ta	-	3a	Rhm
K19	-	DTA115GUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R2=100k	UMT3	16ta	-	3a	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K1B	-	MMBT4124	Si-npn	Sw, 30V, 200mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3d	Di
K1B	-	MMST4124	Si-npn	Sw, 30V, 200mA, 330mW, B=120..360, >300MHz	SC-59	16ta	-	3a	Di
K1D	-	MMBT6427	Si-npn-Darl	AF, 40V, 500mA, 360mW, B=10.00..100.00, >130MHz	SOT-23	16ta	-	3d	Di
K1D	-	MMST6427	Si-npn-Darl	AF, 40V, 500mA, 360mW, B=10k..100k, >130MHz	SOT-23	16ta	-	3a	Di
K1E	-	BC847AW	Si-npn	GP, 50V, 100mA, 250mW, B=110..220, >100MHz	SOT-323	16ta	-	3d	Di
K1E	-	BC848AW	Si-npn	GP, 30V, 100mA, 310mW, B=110..220, >300MHz	SOT-323	16ta	-	3d	Di
K1F	-	BC847B	Si-npn	GP, 50V, 100mA, 200mW, B=200..450, 200MHz	SOT-23	16ta	-	3a	Di
K1F	-	BC847BW	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, >100MHz	SOT-323	16ta	-	3d	Di
K1F	-	BC848BW	Si-npn	GP, 30V, 100mA, 310mW, B=200..450, >300MHz	SOT-323	16ta	-	3d	Di
K1G	-	MMBTA05	Si-npn	GP, 60V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	Di
K1G	-	MMBTA06	Si-npn	GP, 80V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	Di
K1G	-	MMSTA05	Si-npn	GP, 60V, 500mA, 350mW, B>100, >100MHz	SC-59	16ta	-	3a	Di
K1G	-	MMSTA06	Si-npn	GP, 80V, 500mA, 350mW, B>100, >100MHz	SC-59	16ta	-	3a	Di
K1H	-	MMBTA05	Si-npn	GP, 60V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	Di
K1H	-	MMSTA05	Si-npn	GP, 60V, 500mA, 350mW, B>100, >100MHz	SC-59	16ta	-	3a	Di
K1J	-	BC848AW	Si-npn	GP, 30V, 100mA, 310mW, B=110..220, >300MHz	SOT-323	16ta	-	3d	Di
K1K	-	BC848BW	Si-npn	GP, 30V, 100mA, 310mW, B=200..450, >300MHz	SOT-323	16ta	-	3d	Di
K1L	-	BC848CW	Si-npn	GP, 30V, 100mA, 310mW, B=420..800, >300MHz	SOT-323	16ta	-	3d	Di
K1M	-	BC847CW	Si-npn	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-323	16ta	-	3d	Di
K1M	-	BC848CW	Si-npn	GP, 30V, 100mA, 310mW, B=420..800, >300MHz	SOT-323	16ta	-	3d	Di
K1N	-	MMBT3904	Si-npn	GP, 60V, 100mA, 200mW, B= 100..300, >300MHz	SOT-23	16ta	-	3d	Di
K1O	-	KSA3265-O	Si-npn	AF, 30V, 800mA, 200mW, B=100..200, >120MHz	SOT-23	16ta	-	3a	Sam
K1p	-	BCW71	Si-npn	AF, 50V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	PhH
K1P	-	MMBT2222A	Si-npn	GP, 75V, 800mA, 200mW, B=100..300, >200MHz	SOT-23	16ta	-	3d	Di
K1Q	-	BC846AW	Si-npn	GP, 80V, 100mA, 330mW, B=110..220, 250MHz	SOT-323	16ta	-	3d	Di
K1Q	-	BC847AW	Si-npn	GP, 50V, 100mA, 250mW, B=110..220, >100MHz	SOT-323	16ta	-	3d	Di
K1Q	-	BC848AW	Si-npn	GP, 30V, 100mA, 310mW, B=110..220, >300MHz	SOT-323	16ta	-	3d	Di
K1R	-	BC846BW	Si-npn	GP, 80V, 100mA, 250mW, B=200..450, >100MHz	SOT-323	16ta	-	3d	Di
K1R	-	BC847BW	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, >100MHz	SOT-323	16ta	-	3d	Di
K1R	-	BC848BW	Si-npn	GP, 30V, 100mA, 310mW, B=200..450, >300MHz	SOT-323	16ta	-	3d	Di
K1t	-	BCW71	Si-npn	AF, 50V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	PhM
K1W	-	BCW71	Si-npn	AF, 50V, 100mA, 250mW, B=110..220, >100MHz	SOT-23	16ta	-	3a	PhC
K1Y	-	KSA3265-Y	Si-npn	AF, 30V, 800mA, 200mW, B=160..320, >120MHz	SOT-23	16ta	-	3a	Sam
K2	-	2SK57-2	n-FET	GP, 20V, 20mA, 100mV, Idss=1..3mA, Up<4V	SOT-23	16fa	-	3a	Nec
K2	-	AH182W	Hall-IC	Hall-efect sensor IC, Vcc=2.5..5.5V, ODO	SOT-23	16ha	-	3a	Ana
K2	-	AP8821N-22GC	Vdet-IC	2.2V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
K2	-	AP8821N-22GT	Vdet-IC	2.2V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
K2	-	AP8821N-22PC	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
K2	-	AP8821N-22PT	Vdet-IC	2.2V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
K2	-	ELM7642HAB	Vdet-IC	4.2V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
K2	-	HSMP-3832	PIN-diode	Dual, RF, 200V, 1A(1ms), <0.3pF, <1.5Ω(100mA)	SOT-23	16dl	-	3a	Agi
K2	-	MAX810MTR	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ons
K2	-	MMBZ5252B	Z-diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 350mW	SOT-23	16dc	-	3c	Pjt
K2	-	MMBZ5252BW	Z-diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 150mW	SOT-523	16dc	-	3a	Di
K2	-	MMBZ5252BW	Z-diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 200mW	SOT-323	16dc	-	3c	Pjt
K2	-	R3111N222C	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
K2	-	R3130N30EA8	Vdet-IC	3V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
K2	-	TCM810MENB	Vdet-IC	4.38V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
K2-	-	RT9818E-35PV	Vdet-IC	3.5V±1.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Rct
K20	cm	XC6383B201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K21	cm	XC6383B211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K22	cm	XC6383B221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K23	-	BSS123	n-MOSFET	V-MOS, LogL, 100V, 0.17A, 200mW, <6Ω, 10/22ns	SOT-23	16fh	-	3a	Di
K23	-	BSS123W	n-MOSFET	V-MOS, LogL, 100V, 0.17A, 200mW, <6Ω, 10/22ns	SOT-323	16fh	-	3a	Di
K23	cm	XC6383B231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K24	-	2SK160A-24	n-FET	VHF, 30V, 20mA, 150mW, Idss=0.5..1.5mA, Up<4.5V	SOT-23	16fh	-	3a	Nec
K24	-	2SK853A-24	n-FET	GP, 50V, 10mA, 150mW, Idss=0.5..3mA, Up<4.5V	SOT-323	16fa	-	3a	Nec
K24	-	DTC114GKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=22k	SOT-346	16ta	-	3a	Rhm
K24	-	DTC114GUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=22k	UMT3	16ta	-	3a	Rhm
K24	cm	XC6383B241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K25	-	2SK160A-25	n-FET	VHF, 30V, 20mA, 150mW, Idss=1..3mA, Up<4.5V	SOT-23	16fh	-	3a	Nec
K25	-	2SK853A-25	n-FET	GP, 50V, 10mA, 150mW, Idss=2..5mA, Up<4.5V	SOT-323	16fa	-	3a	Nec
K25	-	DTC124GUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, B>56, 250MHz, R2=22к	SOT-323	16ta	-	3a	Rhm
K25	cm	XC6383B251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K26	-	2SK160A-26	n-FET	VHF, 30V, 20mA, 150mW, Idss=2..6mA, Up<4.5V	SOT-23	16fh	-	3a	Nec
K26	-	2SK853A-26	n-FET	GP, 50V, 10mA, 150mW, Idss=4..8mA, Up<4.5V	SOT-323	16fa	-	3a	Nec
K26	-	DTC144GE	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=47k	SOT-416	16ta	-	3a	Rhm
K26	-	DTC144GKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=47k	SOT-346	16ta	-	3a	Rhm
K26	-	DTC144GUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=47k	UMT3	16ta	-	3a	Rhm
K26	cm	XC6383B261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K27	-	2SK160A-27	n-FET	VHF, 30V, 20mA, 150mW, Idss=4..12mA, Up<4.5V	SOT-23	16fh	-	3a	Nec
K27	-	2SK853A-27	n-FET	GP, 50V, 10mA, 150mW, Idss=6..12mA, Up<4.5V	SOT-323	16fa	-	3a	Nec
K27	cm	XC6383B271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K28	cm	XC6383B281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K29	-	DTC115GKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=100k	SOT-346	16ta	-	3a	Rhm
K29	-	DTC115GUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=100k	UMT3	16ta	-	3a	Rhm
K29	cm	XC6383B291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K2B	-	MMBT4126	Si-pnp	GP, 25V, 200mA, 350mW, B=120..360, >250MHz	SOT-23	16ta	-	3d	Di
K2B	-	MMST4126	Si-pnp	GP, 25V, 200mA, 350mW, B=120..360, >250MHz	SOT-323	16ta	-	3a	Di
K2D	-	MMBTA13	Si-npn-Darl	GP, 30V, 00mA, 300mW, B>5000, >125MHz	SOT-23	16ta	-	3a	Di
K2D	-	MMSTA13	Si-npn-Darl	GP, 30V, 300mA, 300mW, B>5000, >125MHz	SC-59	16ta	-	3a	Di
K2E	-	MMBTA63	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>5000, >125MHz	SOT-23	16ta	-	3d	Di
K2E	-	MMSTA63	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>5000, >125MHz	SC-59	16ta	-	3d	Di
K2F	-	MMBT2907A	Si-pnp	GP, 60V, 500mA, 310mW, B=75..300, <200MHz	SOT-23	16ta	-	3d	Di
K2G	-	MMBTA56	Si-pnp	AF-Drv, 80V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3d	Di
K2G	-	MMSTA55	Si-pnp	AF-Drv, 60V, 500mA, 300mW, B>100, >50MHz	SC-59	16ta	-	3a	Di
K2G	-	MMSTA56	Si-pnp	AF-Drv, 80V, 500mA, 300mW, B>100, >50MHz	SC-59	16ta	-	3d	Di
K2H	-	MMBTA55	Si-pnp	GP, 60V, 500mA, 225mW, B=50, >50MHz	SOT-23	16ta	-	3d	Di
K2H	-	MMSTA55	Si-pnp	AF-Drv, 60V, 500mA, 300mW, B>100, >50MHz	SC-59	16ta	-	3a	Di
K2N	-	MMST3904	Si-npn	GP, 60V, 200mA, 250mW, B=100..300, >300MHz	SOT-323	16ta	-	3d	Di
K2p	-	BCW72	Si-npn	AF, 50V, 100mA, 250mW, >100MHz, B=200..450	SOT-23	16ta	-	3a	Phi
K2t	-	BCW72	Si-npn	AF, 50V, 100mA, 250mW, >100MHz, B=200..450	SOT-23	16ta	-	3a	Phi
K2T	-	MMBT4403	Si-pnp	GP, 40V, 800mA, 200mW, B= 100..300, >200MHz	SOT-23	16ta	-	3a	Di
K2X	-	MMBT4401	Si-npn	GP, 60V, 600mA, 225mW, B=100..300, 250MHz	SOT-23	16ta	-	3c	Di
K2X	-	MMBT4401	Si-npn	GP, 60V, 600mA, 225mW, B=100..300, 250MHz	SOT-23	16ta	-	3a	Trs
K3	-	2SC3143-3	Si-npn	AF-Drv, 180V, 80mA, 200mW, 150MHz, B=60..120	SOT-23	16ta	-	3a	San
K3	-	2SK57-3	n-FET	GP, 20V, 20mA, 100mV, Idss=2..6mA, Up<4V	SOT-23	16fa	-	3a	Nec
K3	-	AH183W	Hall-IC	Hall-efect sensor IC, Vcc=2.5..5.5V, ODO	SOT-23	16ha	-	3a	Ana
K3	-	AP8821N-23GC	Vdet-IC	2.3V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
K3	-	AP8821N-23GT	Vdet-IC	2.3V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
K3	-	AP8821N-23PC	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
K3	-	AP8821N-23PT	Vdet-IC	2.3V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
K3	-	ELM7643HAB	Vdet-IC	4.3V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
K3	-	HSMP-3833	PIN-diode	Dual, RF, 200V, 1A(1ms), <0.3pF, <1.5Ω(100mA)	SOT-23	16df	-	3a	Agi
K3	-	MAX810TTR	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ons
K3	-	R3111N232C	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
K3	-	R3130N46EA5	Vdet-IC	4.6V±1.5%, -Reset PPO, 240ms	SOT-23	16vdc	VD7	3b	Ric
K3	-	TCM810TENB	Vdet-IC	3.08V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
K3-	-	RT9819C-15PV	Vdet-IC	1.5V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
K30	cm	XC6383B301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K31	-	BCW81R	Si-npn	AF, 50V, 100mA, 350mW, B=420..800, >300MHz	SOT-23	16te	-	3a	Phi
K31	cm	XC6383B311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K32	cm	XC6383B321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K33	cm	XC6383B331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K34	cm	XC6383B341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K35	cm	XC6383B351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K36	cm	XC6383B361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K37	cm	XC6383B371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K38	-	BSS138	n-MOSFET	SIPMOS, LogL, 50V, 200mA, 300mW, 3.5Ω(220mA), 20/20ns	SOT-23	16fh	-	3c	Di
K38	-	BSS138W	n-MOSFET	SIPMOS, LogL, 50V, 200mA, 200mW, 3.5Ω(220mA), 20/20ns	SOT-323	16fh	-	3c	Di
K38	cm	XC6383B381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K39	cm	XC6383B391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K3A	-	BC856AW	Si-pnp	GP, 80V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3d	Di
K3A	-	BC857A	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-23	16ta	-	3d	Di
K3A	-	BC857AW	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3d	Di
K3A	-	BC858AW	Si-pnp	GP, 30V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3d	Di
K3A	-	KDV804S	C-diode	Dual, 15V, 50nA, 45.7/25pF, Rs<0.3Ω	SOT-23	16dg	-	3a	Kec
K3B	-	BC856BW	Si-pnp	GP, 80V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3d	Di
K3B	-	BC857B	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-23	16ta	-	3d	Di
K3B	-	BC857BW	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3d	Di
K3B	-	BC858BW	Si-pnp	GP, 30V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3d	Di
K3B	-	KDV804S	C-diode	Dual, 15V, 50nA, 45.7/25pF, Rs<0.3Ω	SOT-23	16dg	-	3a	Kec
K3C	-	KDV804S	C-diode	Dual, 15V, 50nA, 45.7/25pF, Rs<0.3Ω	SOT-23	16dg	-	3a	Kec
K3D	-	KDV804S	C-diode	Dual, 15V, 50nA, 45.7/25pF, Rs<0.3Ω	SOT-23	16dg	-	3a	Kec
K3D	-	MMBTA13	Si-npn-Darl	GP, 30V, 300mA, 300mW, B>5000, >125MHz	SOT-23	16ta	-	3a	Di
K3D	-	MMBTA14	Si-npn-Darl	GP, 30V, 300mA, 300mW, B>10000, >125MHz	SOT-23	16ta	-	3a	Di
K3D	-	MMSTA13	Si-npn-Darl	GP, 30V, 300mA, 300mW, B>5000, >125MHz	SC-59	16ta	-	3a	Di
K3D	-	MMSTA14	Si-npn-Darl	GP, 30V, 300mA, 300mW, B>10000, >125MHz	SC-59	16ta	-	3a	Di
K3E	-	KDV804S	C-diode	Dual, 15V, 50nA, 45.7/25pF, Rs<0.3Ω	SOT-23	16dg	-	3a	Kec
K3E	-	MMBTA64	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>10000, >125MHz	SOT-23	16ta	-	3d	Di

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K3E	-	MMSTA63	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>5000, >125MHz	SC-59	16ta	-	3d	Di
K3E	-	MMSTA64	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>10000, >125MHz	SC-59	16ta	-	3d	Di
K3F	-	MMST2907A	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-323	16ta	-	3d	Di
K3G	-	BC857C	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-23	16ta	-	3d	Di
K3G	-	BC857CW	Si-pnp	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-323	16ta	-	3d	Di
K3G	-	BC858C	Si-pnp	GP, 30V, 100mA, 310mW, B=420..800, >150MHz	SOT-23	16ta	-	3d	Di
K3G	-	BC858CW	Si-pnp	GP, 30V, 100mA, 300mW, B=420..800, >100MHz	SOT-23	16ta	-	3d	Di
K3H	-	MMBTH10	Si-npn	RF, 30V, 25mA, 330mW, B>60, >650MHz	SOT-23	16ta	-	3d	Di
K3J	-	BC858AW	Si-pnp	GP, 30V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3d	Di
K3K	-	BC858BW	Si-pnp	GP, 30V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3d	Di
K3L	-	BC858C	Si-pnp	GP, 30V, 100mA, 310mW, B=420..800, >150MHz	SOT-23	16ta	-	3d	Di
K3L	-	BC858CW	Si-pnp	GP, 30V, 100mA, 300mW, B=420..800, >100MHz	SC-59	16ta	-	3a	Di
K3M	-	MMBTA42	Si-npn	Vid, 300V, 200mA, 350mW, B>25, >50MHz	SOT-23	16ta	-	3d	Di
K3M	-	MMSTA42	Si-npn	Vid, 300/300V, 200mA, 350mW, B>25, >50MHz	SC-59	16ta	-	3a	Di
K3N	-	MMBT3906	Si-pnp	Sw, AF, 60/40V, 100mA, 200mW, B=100..300, >250MHz	SOT-23	16ta	-	3d	Di
K3p	-	BCW81	Si-npn	GP, 50V, 100mA, 200mW, B=420, >300MHz	SOT-23	16ta	-	3a	Phi
K3P	-	MMST2222A	Si-npn	GP, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-323	16ta	-	3d	Di
K3R	-	MMSTA92	Si-pnp	Vid, 300/300V, 500mA, 330mW, B=25, >50MHz	SC-59	16ta	-	3d	Di
K3t	-	BCW81	Si-npn	GP, 50V, 100mA, 200mW, B=420, >300MHz	SOT-23	16ta	-	3a	Phi
K3T	-	MMST4403	Si-pnp	Sw, 40V, 600mA, 200mW, B=100..300, >200MHz	SOT-323	16ta	-	3a	Di
K3V	-	BC857A	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-23	16ta	-	3d	Di
K3V	-	BC857AW	Si-pnp	GP, 50V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3d	Di
K3V	-	BC858AW	Si-pnp	GP, 30V, 100mA, 250mW, B=125..250, >100MHz	SOT-323	16ta	-	3d	Di
K3W	-	BC857B	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-23	16ta	-	3d	Di
K3W	-	BC857BW	Si-pnp	GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3d	Di
K3W	-	BC858BW	Si-pnp	GP, 30V, 100mA, 250mW, B=220..475, >100MHz	SOT-323	16ta	-	3d	Di
K3X	-	MMBT4401W	Si-npn	GP, 60V, 600mA, 225mW, B=100..300, 250MHz	SOT-323	16ta	-	3c	Sec
K3X	-	MMST4401	Si-npn	Sw, 60V, 600mA, 200mW, B=100..300, >250MHz	SOT-323	16ta	-	3a	Di
K3Y	-	MMBTH10	Si-npn	RF, 30V, 25mA, 330mW, B>60, >650MHz	SOT-23	16ta	-	3d	Di
K4	-	2SC3143-4	Si-npn	AF-Drv, 180V, 80mA, 200mW, 150MHz, B=90..180	SOT-23	16ta	-	3a	San
K4	-	2SK160-4	n-FET	VHF, 30V, 20mA, 150mW, Idss=0.5..1.5mA, Up<4.5V	SC-59	16fh	-	3a	Nec
K4	-	2SK853-4	n-FET	GP, 30V, 10mA, 150mW, Idss=0.5..3mA, Up<4.5V	SOT-323	16fa	-	3a	Nec
K4	-	AP8821N-24GC	Vdet-IC	2.4V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
K4	-	AP8821N-24GT	Vdet-IC	2.4V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
K4	-	AP8821N-24PC	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
K4	-	AP8821N-24PT	Vdet-IC	2.4V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
K4	-	BCW71R	Si-npn	AF, 45V, 100mA, 350mW, B=110..220, >100MHz	SOT-23	16te	-	3a	Phi
K4	-	ELM7644HAB	Vdet-IC	4.4V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
K4	-	HSMP-3834	PIN-diode	Dual, RF, 200V, 1A(1ms), <0.3pF, <1.5Ω(100mA)	SOT-23	16dg	-	3a	Agi
K4	-	KA4L4L	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/22k	SOT-416	16ta	-	3a	Nec
K4	-	MAX810STR	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ons
K4	-	MMBZ5254B	Z-diode	27V±5%, Izt=5.0mA, Zzt=41Ω, 350mW	SOT-23	16dc	-	3c	Pjt
K4	-	MMBZ5254BW	Z-diode	27V±5%, Izt=5.0mA, Zzt=41Ω, 150mW	SOT-523	16dc	-	3a	Di
K4	-	MMBZ5254BW	Z-diode	27V±5%, Izt=5.0mA, Zzt=41Ω, 200mW	SOT-323	16dc	-	3c	Pjt
K4	-	R3111N242C	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
K4	-	TCM810SENB	Vdet-IC	2.93V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
K4-	-	RT9819G-29PV	Vdet-IC	2.9V±1.5%, +Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
K40	cm	XC6383B401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K41	-	2SK520-41	n-FET	GP, 30V, 50mA, 200mW, Idss=30..50mA, Up<9V	SOT-23	16fa	-	3a	Nec
K41	cm	XC6383B411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K42	-	2SK520-42	n-FET	GP, 30V, 50mA, 200mW, Idss=45..65mA, Up<9V	SOT-23	16fa	-	3a	Nec
K42	cm	XC6383B421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K43	-	2SK520-43	n-FET	GP, 30V, 50mA, 200mW, Idss=60..80mA, Up<9V	SOT-23	16fa	-	3a	Nec
K43	-	BAS40	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dc	-	3c	Di
K43	-	BAS40W	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-323	16dc	-	3c	Di
K43	cm	XC6383B431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K44	-	2SK520-44	n-FET	GP, 30V, 50mA, 200mW, Idss=75..95mA, Up<9V	SOT-23	16fa	-	3a	Nec
K44	-	BAS40-04	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dl	-	3c	Di
K44	-	BAS40W-04	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-323	16dl	-	3b	Di
K44	cm	XC6383B441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K45	-	2SK520-45	n-FET	GP, 30V, 50mA, 200mW, Idss=90..110mA, Up<9V	SOT-23	16fa	-	3a	Nec
K45	-	BAS40-05	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16dg	-	3c	Di
K45	-	BAS40W-05	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-323	16dg	-	3b	Di
K45	cm	XC6383B451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K46	-	BAS40-06	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16df	-	3c	Di
K46	-	BAS40W-06	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-323	16df	-	3b	Di
K46	cm	XC6383B461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K47	cm	XC6383B471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K48	cm	XC6383B481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K49	cm	XC6383B491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K4M	-	MMBT5401	Si-pnp	HV, 160V, 200mA, 350mW, B=60..240, >100MHz	SOT-23	16ta	-	3a	Di
K4N	-	MMBT5551	Si-npn	HV, 180V, 200mA, 350mW, B=80..250, >300MHz	SOT-23	16ta	-	3a	Di
K4N	-	MMST5551	Si-npn	GP, 180V, 200mA, 200mW, B=80..250, <300MHz	SOT-323	16ta	-	3a	Di
K5	-	2SC3143-5	Si-npn	AF-Drv, 180V, 80mA, 200mW, 150MHz, B=135..270	SOT-23	16ta	-	3a	San
K5	-	2SK160-5	n-FET	VHF, 30V, 20mA, 150mW, Idss=1..3mA, Up<4.5V	SC-59	16fh	-	3a	Nec
K5	-	2SK853-5	n-FET	GP, 30V, 10mA, 150mW, Idss=2..5mA, Up<4.5V	SOT-323	16fa	-	3a	Nec
K5	-	AP8821N-25GC	Vdet-IC	2.5V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
K5	-	AP8821N-25GT	Vdet-IC	2.5V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
K5	-	AP8821N-25PC	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
K5	-	AP8821N-25PT	Vdet-IC	2.5V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
K5	-	BCW72R	Si-npn	AF, 45V, 100mA, 350mW, B=200..450, >100MHz	SOT-23	16te	-	3a	Phi
K5	-	ELM7645HAB	Vdet-IC	4.5V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
K5	-	MAX810RTR	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Ons
K5	-	MMBZ5255B	Z-diode	28V±5%, Izt=4.5mA, Zzt=44Ω, 350mW	SOT-23	16dc	-	3c	Pjt
K5	-	MMBZ5255BW	Z-diode	28V±5%, Izt=4.5mA, Zzt=44Ω, 150mW	SOT-523	16dc	-	3a	Di
K5	-	MMBZ5255BW	Z-diode	28V±5%, Izt=4.5mA, Zzt=44Ω, 200mW	SOT-323	16dc	-	3c	Pjt
K5	-	R3111N252C	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
K5	-	SP810EK-4-6	Vdet-IC	1.6V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Sip
K5	-	TCM810RENB	Vdet-IC	2.63V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
K5-	-	RT9819C-20PVL	Vdet-IC	2.0V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vda	VD7	3a	Rct
K50	-	BAS116	Si-diode	Sw, 85V, 215mA, 225mW, Vf<1.25V(150mA), >3µs, 2pF	SOT-23	16dc	-	3a	Di
K50	cm	XC6383B501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K51	-	2SK508-51	n-FET	GP, 15V, 50mA, 200mW, Idss=10..20mA, Up<3.5V	SOT-23	16fa	-	3a	Nec
K51	cm	XC6383B511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K52	-	2SK508-52	n-FET	GP, 15V, 50mA, 200mW, Idss=15..30mA, Up<3.5V	SOT-23	16fa	-	3a	Nec
K52	-	BAV199	Si-diode	Dual, Sw, 70V, 215mA, 225mW, <2pF, <3µs	SOT-23	16dl	-	3a	Di
K52	cm	XC6383B521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K53	-	2SK508-53	n-FET	GP, 15V, 50mA, 200mW, Idss=25..50mA, Up<3.5V	SOT-23	16fa	-	3a	Nec
K53	-	BAW156	Si-diode	Dual, Sw, 82V, 160mA, 250mW, 3pF, 3µs	SOT-23	16df	-	3a	Di
K53	cm	XC6383B531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K54	-	BAS116	Si-diode	Sw, 85V, 215mA, 225mW, Vf<1.25V(150mA), >3µs, 2pF	SOT-23	16dc	-	3a	Di
K54	cm	XC6383B541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K55	cm	XC6383B551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K56	cm	XC6383B561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K57	cm	XC6383B571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K58	cm	XC6383B581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K59	cm	XC6383B591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K5A	-	BC807-16	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=100..250	SOT-23	16ta	-	3c	Di
K5A	-	BC807-16W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=100..250	SOT-323	16ta	-	3c	Di
K5B	-	BC807-25	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=160..400	SOT-23	16ta	-	3c	Di
K5B	-	BC807-25W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=160..400	SOT-323	16ta	-	3c	Di
K5C	-	BC807-40	Si-pnp	GP, 50V, 500mA, 250mW, 80MHz, B=250..600	SOT-23	16ta	-	3c	Di
K5C	-	BC807-40W	Si-pnp	GP, 50V, 500mA, 200mW, 80MHz, B=250..600	SOT-323	16ta	-	3c	Di
K5D	-	MMBD914	Si-diode	Sw, Fast, 100V, 200mA, 225mW, Vf<1V(10mA), <4ns	SOT-23	16dc	-	3c	Di
K5N	-	MMST3906	Si-pnp	GP, 40V, 200mA, 250mW, B=60..300, >250MHz	SOT-323	16ta	-	3a	Di
K6	-	2SK160-6	n-FET	VHF, 30V, 20mA, 150mW, Idss=2..6mA, Up<4.5V	SC-59	16fh	-	3a	Nec
K6	-	2SK853-6	n-FET	GP, 30V, 10mA, 150mW, Idss=4..8mA, Up<4.5V	SOT-323	16fa	-	3a	Nec
K6	-	AP8821N-26GC	Vdet-IC	2.6V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
K6	-	AP8821N-26GT	Vdet-IC	2.6V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
K6	-	AP8821N-26PC	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
K6	-	AP8821N-26PT	Vdet-IC	2.6V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
K6	-	BCV71R	Si-npn	AF, Sw, 80V, 100mA, 250mW, >100MHz, B=110..220	SOT-23	16te	-	3a	Phi
K6	-	ELM7646HAB	Vdet-IC	4.6V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
K6	-	R3111N262C	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
K6	-	TCM810ZENB	Vdet-IC	2.32V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
K6-	-	RT9819C-27PVL	Vdet-IC	2.7V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vda	VD7	3a	Rct
K60	cm	XC6383B601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K61	cm	XC6383B611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K62	cm	XC6383B621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K63	cm	XC6383B631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K64	cm	XC6383B641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K65	cm	XC6383B651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K66	cm	XC6383B661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K67	cm	XC6383B671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K68	cm	XC6383B681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K69	cm	XC6383B691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K6A	-	BC817-16	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=100..250, >200MHz	SOT-23	16ta	-	3d	Di
K6B	-	BC817-25	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=160..400, >200MHz	SOT-23	16ta	-	3d	Di
K6C	-	BC817-40	Si-npn	AF-Drv, 50V, 500mA, 330mW, B=250..600, >200MHz	SOT-23	16ta	-	3d	Di
K6R	-	MMBTA28	Si-npn-Darl	GP, 80V, 500mA, 500mW, B>10000, >100MHz	SOT-23	16ta	-	3a	Di



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K7	-	2SK160-7	n-FET	VHF, 30V, 20mA, 150mW, Idss=4..12mA, Up<4.5V	SC-59	16fh	-	3a	Nec
K7	-	2SK853-7	n-FET	GP, 30V, 10mA, 150mW, Idss=6..12mA, Up<4.5V	SOT-323	16fa	-	3a	Nec
K7	-	AP8821N-27GC	Vdet-IC	2.7V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
K7	-	AP8821N-27GT	Vdet-IC	2.7V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
K7	-	AP8821N-27PC	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
K7	-	AP8821N-27PT	Vdet-IC	2.7V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
K7	-	ELM7647HAB	Vdet-IC	4.7V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
K7	-	KN4L4L	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1/R2=47k/22k	SOT-416	16ta	-	3a	Nec
K7	-	R3111N272C	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
K7-	-	RT9818C-30PVL	Vdet-IC	3.0V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vdc	VD6	3a	Rct
K70	-	BS870	n-MOSFET	D-MOS, Sw, 60V, 250mA, 310mW, <3.5Ω(100mA), 5/25ns	SOT-23	16fh	-	3a	Di
K70	cm	XC6383B701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23	16sw	DC5	3d	Tor
K72	-	2N7002T	n-MOSFET	TMOS, 60V, 150mA, 200mW, <7.5Ω(500mA), 7/11ns	SOT-323	16fh	-	3a	Trs
K72	-	2N7002W	n-MOSFET	TMOS, 60V, 250mA, 310mW, <7.5Ω(500mA), 5/25ns	SOT-323	16fh	-	3a	Di
K73	-	BAS70	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dc	-	3c	Di
K74	-	BAS70-04	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dl	-	3c	Di
K74	-	BAS70-04W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dl	-	3c	Sec
K75	-	BAS70-05	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dg	-	3c	Di
K75	-	BAS70-05W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dg	-	3c	Sec
K76	-	BAS70-06	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16df	-	3c	Di
K76	-	BAS70-06W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16df	-	3c	Sec
K7B	-	2N7002E	n-MOSFET	TMOS, 60V, 250mA, 310mW, <7.5Ω(500mA), 5/25ns	SOT-23	16fh	-	3a	Di
K7C	-	BAS70	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dc	-	3c	Di
K7C	-	BAS70W	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dc	-	3c	Sec
K7D	-	BAS70-04	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dl	-	3c	Di
K7E	-	BAS70-05	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16dg	-	3c	Di
K7F	-	BAS70-06	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-23	16df	-	3c	Di
K7p	-	BCV71	Si-npn	AF, Sw, 80V, 100mA, 250mW, >100MHz, B=110..220	SOT-23	16ta	-	3a	PhH
K7t	-	BCV71	Si-npn	AF, Sw, 80V, 100mA, 250mW, >100MHz, B=110..220	SOT-23	16ta	-	3a	PhM
K7W	-	BCV71	Si-npn	AF, Sw, 80V, 100mA, 250mW, >100MHz, B=110..220	SOT-23	16ta	-	3a	PhC
K8	-	AP8821N-28GC	Vdet-IC	2.8V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
K8	-	AP8821N-28GT	Vdet-IC	2.8V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
K8	-	AP8821N-28PC	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
K8	-	AP8821N-28PT	Vdet-IC	2.8V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
K8	-	BZX84C4V3	Z-diode	4.0..4.6V, Zzt=90Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
K8	-	ELM7648HAB	Vdet-IC	4.8V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
K8	-	R3111N282C	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
K8-	-	RT9818C-46PV	Vdet-IC	4.6V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
K83	-	XC61CN0802M	Vdet-IC	0.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
K84	-	BSS84	p-MOSFET	V-MOS, LogL, 50V, 130mA, 300mW, <10Ω(130mA), 10/18ns	SOT-23	16fh	-	3c	Di
K8p	-	BCV72	Si-npn	AF, Sw, 80V, 100mA, 250mW, >100MHz, B=200..450	SOT-23	16ta	-	3a	PhH
K8t	-	BCV72	Si-npn	AF, Sw, 80V, 100mA, 250mW, >100MHz, B=200..450	SOT-23	16ta	-	3a	PhM
K8W	-	BCV72	Si-npn	AF, Sw, 80V, 100mA, 250mW, >100MHz, B=200..450	SOT-23	16ta	-	3a	PhC
K9	-	1SS348	Si-diode	Schottky, 80V, 0.1A	SC-59	16dg	-	3a	Tos
K9	-	AP8821N-29GC	Vdet-IC	2.9V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
K9	-	AP8821N-29GT	Vdet-IC	2.9V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
K9	-	AP8821N-29PC	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
K9	-	AP8821N-29PT	Vdet-IC	2.9V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
K9	-	BCV72R	Si-npn	AF, Sw, 80V, 100mA, 250mW, >100MHz, B=200..450	SOT-23	16te	-	3a	Phi
K9	-	BZX84C20	Z-diode	18.8..21.2V, Zzt=55Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
K9	-	ELM7649HAB	Vdet-IC	4.9V±2%, +Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
K9	-	R3111N292C	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
K9-	-	RT9819A-36PVL	Vdet-IC	3.6V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Rct
K91	-	BCF81R	Si-npn	GP, AF, 50V, 200mA, 250mW, B=420..80, >100MHz	SOT-23	16te	-	3a	Phi
K93	-	XC61CN0902M	Vdet-IC	0.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
K9A	-	MMBZ5V6AL	TVS	Dual, Vrwm=3.0V, Vbr=5.32..5.88V, 3.0A, 24W(1ms)	SOT-23	16df	-	3c	Di
K9C	-	MMBZ6V8AL	TVS	Dual, Vrwm=4.5V, Vbr=6.46..7.14V, 2.5A, 24W(1ms)	SOT-23	16df	-	3c	Di
K9D	-	MMBZ9V1AL	TVS	Dual, Vrwm=6.0V, Vbr=8.65..9.56V, 1.7A, 24W(1ms)	SOT-23	16df	-	3c	Di
K9E	-	MMBZ10VAL	TVS	Dual, Vrwm=6.5V, Vbr=9.50..10.5V, 1.7A, 24W(1ms)	SOT-23	16df	-	3c	Di
K9K	-	MMBZ15VAL	TVS	Dual, Vrwm=12V, Vbr=14.25..15.75V, 1.9A, 40W(1ms)	SOT-23	16df	-	3c	Di
K9L	-	MMBZ18VAL	TVS	Dual, Vrwm=14.5V, Vbr=17.10..18.90V, 1.6A, 40W(1ms)	SOT-23	16df	-	3c	Di
K9N	-	MMBZ20VAL	TVS	Dual, Vrwm=17V, Vbr=19.0..21.0V, 1.4A, 40W(1ms)	SOT-23	16df	-	3c	Di
K9p	-	BCF81	Si-npn	GP, AF, 50V, 200mA, 250mW, B=420..80, >100MHz	SOT-23	16ta	-	3a	Phi
K9Q	-	MMBZ27VAL	TVS	Dual, Vrwm=22V, Vbr=25.65..28.35V, 1.0A, 40W(1ms)	SOT-23	16df	-	3c	Di
K9T	-	MMBZ33VAL	TVS	Dual, Vrwm=26V, Vbr=31.35..34.65V, 0.87A, 40W(1ms)	SOT-23	16df	-	3c	Di
ka	-	PT7M6220NLC3	Vdet-IC	2.0V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
ka	-	PT7M6220NLTA3	Vdet-IC	2.0V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
ka	cf	PT7M6220NLC3E	Vdet-IC	2.0V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
ka	cf	PT7M6220NLTA3E	Vdet-IC	2.0V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
kA	-	BU46L372G	Vdet-IC	3.7V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Ka	-	BD48L59G	Vdet-IC	5.9V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
KA	-	2SA1965	Si-pnp	Mute, 15V, 0.1A, 0.15W, B=200..600, 600MHz, Ron=1.2Ω	SOT-23	16ta	-	3a	San
KA	-	BFT75	Si-npn	UHF-A, LN, 20V, 50mA, 4.6GHz	SOT-23	16ta	-	3a	Sie
KA	-	DZ23C6V2	Z-diode	Dual, 5.8..6.6V, Izt=5mA, Zzt=4.8Ω, 300mW	SOT-23	16dg	-	3a	Lge
KA	-	ELM7620HDB	Vdet-IC	2.0V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
KA	-	RN1441A	Si-npn-Digi	Mute, 50V, 300mA, 300mW, R1=5k6, B=200..700	SOT-346	16ta	-	3a	Tos
KA-	-	RT9819D-25PV	Vdet-IC	2.5V±1.5%, -Reset PPO, Td=450ms	SOT-23	16vdc	VD7	3a	Rct
KA1	-	MMBD4448HW	Si-diode	Sw, Fast, 75V, 500mA, Vf<1.25V(150mA), <4ns	SOT-323	16dc	-	3a	Di
KA2	-	BAS16W	Si-diode	Sw, Fast, 75V, 300mA, Vf<1.25V(150mA), <4ns, 2pF	SOT-323	16dc	-	3a	Di
KA2	-	MMBD4148	Si-diode	Sw, Fast, 75V, 200mA, 350mW, <4ns, 4pF	SOT-23	16dc	-	3c	Di
KA2	-	MMBD4148W	Si-diode	Sw, Fast, 75V, 300mA, Vf<1.25V(150mA), <4ns, 2pF	SOT-323	16dc	-	3a	Di
KA3	-	MMBD4448	Si-diode	Sw, Fast, 80V, 500mA, Vf<1V(100mA), <4ns	SOT-23	16dc	-	3g	Vs
KA3	-	MMBD4448H	Si-diode	Sw, Fast, 80V, 500mA, Vf<1.25V(150mA), <4ns	SOT-23	16dc	-	3a	Di
KA3	-	MMBD4448W	Si-diode	Sw, Fast, 75V, 500mA, Vf<1.25V(150mA), <4ns	SOT-323	16dc	-	3a	Di
KA6	-	BAS16	Si-diode	Sw, Fast, 75V, 215mA, 250mW, <6ns	SOT-23	16dc	-	3c	Di
KA6	-	BAS16	Si-diode	Sw, Fast, 75V, 215mA, 250mW, <6ns	SOT-23	16dc	-	3a	Vs
KA8	-	BAS19	Si-diode	Sw, Fast, 120V, 250mA, 250mW, <50ns	SOT-23	16dc	-	3a	Di
KA8	-	BAS19W	Si-diode	Sw, Fast, 120V, 250mA, 250mW, <50ns	SOT-323	16dc	-	3a	Di
KAG	-	2SK368-GR	n-FET	GP, 100V, 10mA, 150mW, Idss=0.6..1.5mA, Up<3.5V	SOT-23	16fi	-	3a	Tos
KAO	-	2SK368-O	n-FET	GP, 100V, 10mA, 150mW, Idss=1.5..3mA, Up<3.5V	SOT-23	16fi	-	3a	Tos
KAY	-	2SK368-Y	n-FET	GP, 100V, 10mA, 150mW, Idss=3..6.5mA, Up<3.5V	SOT-23	16fi	-	3a	Tos
kb	-	PT7M6221CLC3	Vdet-IC	2.1V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
kb	-	PT7M6221CLTA3	Vdet-IC	2.1V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
kb	cf	PT7M6221CLC3E	Vdet-IC	2.1V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
kb	cf	PT7M6221CLTA3E	Vdet-IC	2.1V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
kB	-	BU46L382G	Vdet-IC	3.8V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Kb	-	BD48L60G	Vdet-IC	6.0V±1%, -Reset ODO	SSOP-3	16vda	VD6	3q	Rhm
KB	-	2SC2778-B	Si-npn	RF, AM/FM, IF, 30V, 30mA, 200mW, B=70..160, 230MHz	SOT-23	16ta	-	3a	Pan
KB	-	2SC3936-B	Si-npn	RF, FM/AM, IF, 30V, 30mA, 150mW, B=70..160, 230MHz	SOT-323	16ta	-	3a	Pan
KB	-	2SC4655-B	Si-npn	HF, 30V, 30mA, 125mW, B=70..160, 230MHz	SOT-416	16ta	-	3a	Pan
KB	-	2SK323-B	n-FET	GP, 40V, 30mA, 150mW, Idss=1.6..3.2mA, Up<1.5V	SOT-23	16fa	-	3a	Ren
KB	-	2SK433-B	n-FET	AF-Amp, 50V, 150mW, Idss=0.6..1.5mA, Rds=250Ω(5mA)	SC-59	16fa	-	3a	Mit
KB	-	DZ23C6V8	Z-diode	Dual, 6.4..7.2V, Izt=5mA, Zzt=4.5Ω, 300mW	SOT-23	16dg	-	3a	Lge
KB	-	ELM7621HDB	Vdet-IC	2.1V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
KB	-	RN1441B	Si-npn-Digi	Mute, 50V, 300mA, 300mW, R1=5k6, B=350..1200	SOT-346	16ta	-	3a	Tos
KB-	-	RT9818B-18PV	Vdet-IC	1.8V±1.5%, -Reset ODO, Td=55ms	SOT-23	16vda	VD6	3a	Rct
KB=	-	RT9818B-18GV	Vdet-IC	1.8V±1.5%, -Reset ODO, Td=55ms	SOT-23	16vda	VD6	3a	Rct
kc	-	PT7M6221CHC3	Vdet-IC	2.1V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
kc	-	PT7M6221CHTA3	Vdet-IC	2.1V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
kc	cf	PT7M6221CHC3E	Vdet-IC	2.1V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
kc	cf	PT7M6221CHTA3E	Vdet-IC	2.1V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
kC	-	BU46L392G	Vdet-IC	3.9V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Kc	-	BD49L23G	Vdet-IC	2.3V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
KC	-	2SC2778-C	Si-npn	RF, AM/FM, IF, 30V, 30mA, 200mW, B=110..250, 230MHz	SOT-23	16ta	-	3a	Pan
KC	-	2SC3936-C	Si-npn	RF, FM/AM, IF, 30V, 30mA, 150mW, B=110..250, 230MHz	SOT-323	16ta	-	3a	Pan
KC	-	2SC4655-C	Si-npn	HF, 30V, 30mA, 125mW, B=110..250, 230MHz	SOT-416	16ta	-	3a	Pan
KC	-	2SK323-C	n-FET	GP, 40V, 30mA, 150mW, Idss=2.5..5mA, Up<1.5V	SOT-23	16fa	-	3a	Ren
KC	-	2SK433-C	n-FET	AF-Amp, 50V, 150mW, Idss=1..3mA, Rds=250Ω(5mA)	SC-59	16fa	-	3a	Mit
KC	-	2SK930-C	n-FET	AF-Amp, 50V, 150mW, Idss=1..3mA, Rds=250Ω(5mA)	SOT-323	16fa	-	3a	Mit
KC	-	BFQ29P	Si-npn	VHF.UHF, 20V, 30mA, 280mW, B=50..250, 5GHz	SOT-23	16ta	-	3a	Sie
KC	-	DZ23C7V5	Z-diode	Dual, 7.0..7.9V, Izt=5mA, Zzt=4Ω, 300mW	SOT-23	16dg	-	3a	Lge
KC	-	ELM7622HDB	Vdet-IC	2.2V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
KC	-	UNR32AE	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=47k/22k	SSSMini3	18ta	-	3a	Pan
KC-	-	RT9161A-50PV	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-23	16cg	VR1	3a	Rct
KC1	-	CZRT5221B-G	Z-diode	2.28..2.52V, Zzt=30Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KC1	-	MMBZ5221B	Z-diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 350mW	SOT-23	16dc	-	3c	Di
KC1	-	MMBZ5221BW	Z-diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-323	16dc	-	3c	Di
KC2	-	CZRT5222B-G	Z-diode	2.38..2.63V, Zzt=30Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KC3	-	CZRT5223B-G	Z-diode	2.57..2.84V, Zzt=30Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KC3	-	MMBZ5223B	Z-diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 350mW	SOT-23	16dc	-	3c	Di
KC3	-	MMBZ5223BW	Z-diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-323	16dc	-	3c	Di
KC5	-	CZRT5225B-G	Z-diode	2.85..3.15V, Zzt=30Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KC5	-	MMBZ5225B	Z-diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 350mW	SOT-23	16dc	-	3c	Di
KC5	-	MMBZ5225BW	Z-diode	3.0V±5%, Izt=20mA, Zzt=29Ω, 200mW	SOT-323	16dc	-	3c	Di
KCG	-	2SK625-G	n-FET	Cond.-Microphone, 20V, 10mA, 100mW, Idss=0.25..0.5mA, Up<0.8V	SOT-23	16fa	-	3a	Tos
KCO	-	2SK625-O	n-FET	Cond.-Microphone, 20V, 10mA, 100mW, Idss=0.1..0.2mA, Up<0.8V	SOT-23	16fa	-	3a	Tos
KCR	-	2SK625-R	n-FET	Cond.-Microphone, 20V, 10mA, 100mW, Idss=0.06..0.12mA, Up<0.8V	SOT-23	16fa	-	3a	Tos
KCY	-	2SK625-Y	n-FET	Cond.-Microphone, 20V, 10mA, 100mW, Idss=0.15..03mA, Up<0.8V	SOT-23	16fa	-	3a	Tos
kd	-	PT7M6221NLC3	Vdet-IC	2.1V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
kd	-	PT7M6221NLTA3	Vdet-IC	2.1V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
kd	cf	PT7M6221NLC3E	Vdet-IC	2.1V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
kd	cf	PT7M6221NLTA3E	Vdet-IC	2.1V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
kD	-	BU46L402G	Vdet-IC	4.0V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Kd	-	BD49L24G	Vdet-IC	2.4V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
KD	-	2SK323-D	n-FET	GP, 40V, 30mA, 150mW, Idss=4..8mA, Up<1.5V	SOT-23	16fa	-	3a	Ren
KD	-	2SK433-D	n-FET	AF-Amp, 50V, 150mW, Idss=2.5..6mA, Rds=250Ω(5mA)	SC-59	16fa	-	3a	Mit
KD	-	2SK930-D	n-FET	AF-Amp, 50V, 150mW, Idss=2.5..6mA, Rds=250Ω(5mA)	SOT-323	16fa	-	3a	Mit
KD	-	DZ23C8V2	Z-diode	Dual, 7.7..8.7V, Izt=5mA, Zzt=4.5Ω, 300mW	SOT-23	16dg	-	3a	Lge
KD	-	ELM7623HDB	Vdet-IC	2.3V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
KD	-	UNR32AF	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=4.7k/10k	SSSMini3	18ta	-	3a	Pan
KD-	-	RT9818A-36PV	Vdet-IC	3.6V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
KD1	-	AZ23C2V7	Z-diode	Dual, 2.57..2.84V, Zzt=83Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KD2	-	AZ23C3V0	Z-diode	Dual, 2.85..3.15V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KD3	-	AZ23C3V3	Z-diode	Dual, 3.14..3.47V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KD4	-	AZ23C3V6	Z-diode	Dual, 3.42..3.78V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KD5	-	AZ23C3V9	Z-diode	Dual, 3.71..4.10V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KD6	-	AZ23C4V3	Z-diode	Dual, 4.09..4.52V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KD7	-	AZ23C4V7	Z-diode	Dual, 4.47..4.94V, Zzt=78Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KD8	-	AZ23C5V1	Z-diode	Dual, 4.85..5.36V, Zzt=60Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KD9	-	AZ23C5V6	Z-diode	Dual, 5.32..5.88V, Zzt=40Ω, Izt=5mA, 200mW	SOT-323	16df	-	3c	Di
KDA	-	AZ23C6V2	Z-diode	Dual, 5.89..6.51V, Zzt=10Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDB	-	AZ23C6V8	Z-diode	Dual, 6.46..7.14V, Zzt=8Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDC	-	AZ23C7V5	Z-diode	Dual, 7.13..7.88V, Zzt=7Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDD	-	AZ23C8V2	Z-diode	Dual, 7.79..8.61V, Zzt=7Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDE	-	AZ23C9V1	Z-diode	Dual, 8.65..9.56V, Zzt=10Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDF	-	AZ23C10	Z-diode	Dual, 9.50..10.50V, Zzt=15Ω, Izt=5mA, 200mW	SOT-323	16df	-	3c	Di
KDG	-	AZ23C11	Z-diode	Dual, 10.45..11.55V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDH	-	AZ23C12	Z-diode	Dual, 11.40..12.60V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDI	-	AZ23C13	Z-diode	Dual, 12.35..13.65V, Zzt=25Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDJ	-	AZ23C15	Z-diode	Dual, 14.25..15.75V, Zzt=30Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDK	-	AZ23C16	Z-diode	Dual, 15.20..16.80V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDL	-	AZ23C18	Z-diode	Dual, 17.10..18.90V, Zzt=50Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDM	-	AZ23C20	Z-diode	Dual, 19.0..21.00V, Zzt=50Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDN	-	AZ23C22	Z-diode	Dual, 20.90..23.10V, Zzt=55Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDO	-	AZ23C24	Z-diode	Dual, 22.80..25.20V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDP	-	AZ23C27	Z-diode	Dual, 25.65..28.35V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDQ	-	AZ23C30	Z-diode	Dual, 28.50..31.50V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDR	-	AZ23C33	Z-diode	Dual, 31.35..34.65V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDS	-	AZ23C36	Z-diode	Dual, 34.20..37.80V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
KDT	-	AZ23C39	Z-diode	Dual, 37.05..40.95V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16df	-	3c	Di
ke	-	PT7M6222CLC3	Vdet-IC	2.2V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
ke	-	PT7M6222CLTA3	Vdet-IC	2.2V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
ke	cf	PT7M6222CLC3E	Vdet-IC	2.2V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
ke	cf	PT7M6222CLTA3E	Vdet-IC	2.2V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
kE	-	BU46L412G	Vdet-IC	4.1V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Ke	-	BD49L25G	Vdet-IC	2.5V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
KE	-	2SK1062	n-MOSFET	GP, 60V, 200mA, 200mW, 0.6Ω(10V), 14/75ns	SOT-23	16fh	-	3a	Tos
KE	-	2SK323-E	n-FET	GP, 40V, 30mA, 150mW, Idss=6..12mA, Up<1.5V	SOT-23	16fa	-	3a	Ren
KE	-	2SK433-E	n-FET	AF-Amp, 50V, 150mW, Idss=5..12mA, Rds=250Ω(5mA)	SC-59	16fa	-	3a	Mit
KE	-	2SK930-E	n-FET	AF-Amp, 50V, 150mW, Idss=5..12mA, Rds=250Ω(5mA)	SOT-323	16fa	-	3a	Mit
KE	-	A102WFT-1.5	LVR-IC	LDO, 1.5V±1.5%, 300mA	SOT-23	16cg	VR1	3b	Adt
KE	-	DZ23C9V1	Z-diode	Dual, 8.5..9.6V, Izt=5mA, Zzt=4.8Ω, 300mW	SOT-23	16dg	-	3a	Lge
KE	-	ELM7624HDB	Vdet-IC	2.4V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
KE-	-	RT9818E-18PV	Vdet-IC	1.8V±1.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Rct
KE1	-	CZRT5231B-G	Z-diode	4.85..5.36V, Zzt=17Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KE1	-	MMBZ5231B	Z-diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 350mW	SOT-23	16dc	-	3c	Di
KE1	-	MMBZ5231BW	Z-diode	5.1V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOT-323	16dc	-	3c	Di
KE2	-	CZRT5232B-G	Z-diode	5.32..5.88V, Zzt=11Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KE2	-	MMBZ5232B	Z-diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 350mW	SOT-23	16dc	-	3c	Di
KE2	-	MMBZ5232BW	Z-diode	5.6V±5%, Izt=20mA, Zzt=11Ω, 200mW	SOT-323	16dc	-	3c	Di
KE3	-	MMBZ5233B	Z-diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 350mW	SOT-23	16dc	-	3c	Di
KE3	-	MMBZ5233BW	Z-diode	6.0V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOT-323	16dc	-	3c	Di
KE4	-	CZRT5234B-G	Z-diode	5.89..6.51V, Zzt=7Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KE4	-	MMBZ5234B	Z-diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 350mW	SOT-23	16dc	-	3c	Di
KE4	-	MMBZ5234BW	Z-diode	6.2V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOT-323	16dc	-	3c	Di
KE5	-	CZRT5235B-G	Z-diode	6.46..7.14V, Zzt=5Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KE5	-	MMBZ5235B	Z-diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 350mW	SOT-23	16dc	-	3c	Di
KE5	-	MMBZ5235BW	Z-diode	6.8V±5%, Izt=20mA, Zzt=5Ω, 200mW	SOT-323	16dc	-	3c	Di
kf	-	PT7M6222CHC3	Vdet-IC	2.2V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
kf	-	PT7M6222CHTA3	Vdet-IC	2.2V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
kf	cf	PT7M6222CHC3E	Vdet-IC	2.2V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
kf	cf	PT7M6222CHTA3E	Vdet-IC	2.2V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
kF	-	BU46L422G	Vdet-IC	4.2V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Kf	-	BD49L26G	Vdet-IC	2.6V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
KF	-	2SJ168	p-FET	Sw, 60V, 200mA, 400mW, 0.2Ω, 14/100ns	SOT-323	16fh	-	3a	Tos
KF	-	DZ23C10	Z-diode	Dual, 9.4..10.6V, Izt=5mA, Zzt=5.2Ω, 300mW	SOT-23	16dg	-	3a	Lge
KF	-	ELM7625HDB	Vdet-IC	2.5V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
KF	-	UNR32AL	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=4.7k/4.7k	SSSMini3	18ta	-	3a	Pan
KF-	-	RT9198-35PV	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-23	16cg	VR1	3a	Rct
KF1	-	CZRT5236B-G	Z-diode	7.13..7.88V, Zzt=6Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KF1	-	MMBZ5236B	Z-diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 350mW	SOT-23	16dc	-	3c	Di
KF1	-	MMBZ5236BW	Z-diode	7.5V±5%, Izt=20mA, Zzt=6Ω, 200mW	SOT-323	16dc	-	3c	Di
KF2	-	CZRT5237B-G	Z-diode	7.79..8.61V, Zzt=8Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KF2	-	MMBZ5237B	Z-diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 350mW	SOT-23	16dc	-	3c	Di
KF2	-	MMBZ5237BW	Z-diode	8.2V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOT-323	16dc	-	3c	Di
KF3	-	MMBZ5238B	Z-diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 350mW	SOT-23	16dc	-	3c	Di
KF3	-	MMBZ5238BW	Z-diode	8.7V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOT-323	16dc	-	3c	Di
KF4	-	CZRT5239B-G	Z-diode	8.65..9.56V, Zzt=10Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KF4	-	MMBZ5239B	Z-diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 350mW	SOT-23	16dc	-	3c	Di
KF4	-	MMBZ5239BW	Z-diode	9.1V±5%, Izt=20mA, Zzt=10Ω, 200mW	SOT-323	16dc	-	3c	Di
KF5	-	CZRT5240B-G	Z-diode	9.50..10.50V, Zzt=17Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KF5	-	MMBZ5240B	Z-diode	10V±5%, Izt=20mA, Zzt=17Ω, 350mW	SOT-23	16dc	-	3c	Di
KF5	-	MMBZ5240BW	Z-diode	10V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOT-323	16dc	-	3c	Di
kg	-	PT7M6222NLC3	Vdet-IC	2.2V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
kg	-	PT7M6222NLTA3	Vdet-IC	2.2V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
kg	cf	PT7M6222NLC3E	Vdet-IC	2.2V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
kg	cf	PT7M6222NLTA3E	Vdet-IC	2.2V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
kG	-	BU46L432G	Vdet-IC	4.3V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Kg	-	BD49L27G	Vdet-IC	2.7V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
KG	-	2SK881-GR	n-FET	FM/VHF, 18V, 10mA, 100mW, Idss=5..10mA, Up<4V	SOT-323	16fk	-	3a	Tos
KG	-	ELM7626HDB	Vdet-IC	2.6V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
KG-	-	RT9818B-28PV	Vdet-IC	2.8V±1.5%, -Reset ODO, Td=55ms	SOT-23	16vda	VD6	3a	Rct
KG1	-	CZRT5226B-G	Z-diode	3.14..3.47V, Zzt=28Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KG1	-	MMBZ5226B	Z-diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 350mW	SOT-23	16dc	-	3c	Di
KG1	-	MMBZ5226BW	Z-diode	3.3V±5%, Izt=20mA, Zzt=28Ω, 200mW	SOT-323	16dc	-	3c	Di
KG2	-	CZRT5227B-G	Z-diode	3.42..3.78V, Zzt=24Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KG2	-	MMBZ5227B	Z-diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 350mW	SOT-23	16dc	-	3c	Di
KG2	-	MMBZ5227BW	Z-diode	3.6V±5%, Izt=20mA, Zzt=24Ω, 200mW	SOT-323	16dc	-	3c	Di
KG3	-	CZRT5228B-G	Z-diode	3.71..4.10V, Zzt=23Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KG3	-	MMBZ5228B	Z-diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 350mW	SOT-23	16dc	-	3c	Di
KG3	-	MMBZ5228BW	Z-diode	3.9V±5%, Izt=20mA, Zzt=23Ω, 200mW	SOT-323	16dc	-	3c	Di
KG4	-	CZRT5229B-G	Z-diode	4.09..4.52V, Zzt=22Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KG4	-	MMBZ5229B	Z-diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 350mW	SOT-23	16dc	-	3c	Di
KG4	-	MMBZ5229BW	Z-diode	4.3V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOT-323	16dc	-	3c	Di
KG5	-	CZRT5230B-G	Z-diode	4.47..4.94V, Zzt=19Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KG5	-	MMBZ5230B	Z-diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 350mW	SOT-23	16dc	-	3c	Di
KG5	-	MMBZ5230BW	Z-diode	4.7V±5%, Izt=20mA, Zzt=19Ω, 200mW	SOT-323	16dc	-	3c	Di
kh	-	PT7M6223CLC3	Vdet-IC	2.3V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
kh	-	PT7M6223CLTA3	Vdet-IC	2.3V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
kh	cf	PT7M6223CLC3E	Vdet-IC	2.3V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
kh	cf	PT7M6223CLTA3E	Vdet-IC	2.3V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
kH	-	BU46L442G	Vdet-IC	4.4V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Kh	-	BD49L28G	Vdet-IC	2.8V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
KH	-	A102WFT-1.8	LVR-IC	LDO, 1.8V±1.5%, 300mA	SOT-23	16cg	VR1	3b	Adt
KH	-	DZ23C11	Z-diode	Dual, 10.4..11.6V, Izt=5mA, Zzt=6Ω, 300mW	SOT-23	16dg	-	3a	Lge
KH	-	ELM7627HDB	Vdet-IC	2.7V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
KH	-	UNR32AM	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=2k2/47k	SSSMini3	18ta	-	3a	Pan
KH-	-	RT9818C-20PV	Vdet-IC	2.0V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
KH=	-	RT9818C-20GV	Vdet-IC	2.0V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
KH1	-	CZRT5241B-G	Z-diode	10.45..11.55V, Zzt=22Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KH1	-	MMBZ5241B	Z-diode	11V±5%, Izt=20mA, Zzt=22Ω, 350mW	SOT-23	16dc	-	3c	Di
KH1	-	MMBZ5241BW	Z-diode	11V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOT-323	16dc	-	3c	Di
KH2	-	CZRT5242B-G	Z-diode	11.40..12.60V, Zzt=30Ω, Izt=20.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KH2	-	MMBZ5242B	Z-diode	12V±5%, Izt=20mA, Zzt=30Ω, 350mW	SOT-23	16dc	-	3c	Di
KH2	-	MMBZ5242BW	Z-diode	12V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-323	16dc	-	3c	Di
KH3	-	CZRT5243B-G	Z-diode	12.35..13.65V, Zzt=13Ω, Izt=9.5mA, 350mW	SOT-23	16dc	-	3a	Cmc
KH3	-	MMBZ5243B	Z-diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 350mW	SOT-23	16dc	-	3c	Di
KH3	-	MMBZ5243BW	Z-diode	13V±5%, Izt=9.5mA, Zzt=13Ω, 200mW	SOT-323	16dc	-	3c	Di
KH5	-	CZRT5245B-G	Z-diode	14.25..15.75V, Zzt=16Ω, Izt=8.5mA, 350mW	SOT-23	16dc	-	3a	Cmc
KH5	-	MMBZ5245B	Z-diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 350mW	SOT-23	16dc	-	3c	Di



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KH5	-	MMBZ5245BW	Z-diode	15V±5%, Izt=8.5mA, Zzt=16Ω, 200mW	SOT-323	16dc	-	3c	Di
ki	-	PT7M6223CHC3	Vdet-IC	2.3V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
ki	-	PT7M6223CHTA3	Vdet-IC	2.3V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
ki	cf	PT7M6223CHC3E	Vdet-IC	2.3V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
ki	cf	PT7M6223CHTA3E	Vdet-IC	2.3V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
KI	-	2SK1828	n-MOSFET	V-MOS +Di (S->G), 20V, 0.05A, <40Ω(10mA)	SOT-23	16fh	-	3a	Tos
KID	-	2SC4050-D	Si-npn	AF, Sw, 120V, 100mA, 150mW, B=250..500	MPAK	16ta	-	3a	Ren
KIE	-	2SC4050-E	Si-npn	AF, Sw, 120V, 100mA, 150mW, B=400..800	MPAK	16ta	-	3a	Ren
kj	-	PT7M6223NLC3	Vdet-IC	2.3V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
kj	-	PT7M6223NLTA3	Vdet-IC	2.3V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
kj	cf	PT7M6223NLC3E	Vdet-IC	2.3V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
kj	cf	PT7M6223NLTA3E	Vdet-IC	2.3V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
KJ	-	2SK1847	n-MOSFET	Sw, 30V, 500mA, 250mW, <1.1Ω(250mA), 5/35nA	SOT-23	16fh	-	3a	San
KJ	-	2SK2036	n-MOSFET	V-MOS, +Di(S->G), 20V, 100mA, <6Ω(10mA)	SOT-23	16fh	-	3a	Tos
KJ	-	DZ23C12	Z-diode	Dual, 11.4..12.7V, Izt=5mA, Zzt=7Ω, 300mW	SOT-23	16dg	-	3a	Lge
KJ	-	ELM7628HDB	Vdet-IC	2.8V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
KJ-	-	RT9818C-47PV	Vdet-IC	4.7V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
KJ1	-	CZRT5246B-G	Z-diode	15.20..16.80V, Zzt=17Ω, Izt=7.8mA, 350mW	SOT-23	16dc	-	3a	Cmc
KJ1	-	MMBZ5246B	Z-diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 350mW	SOT-23	16dc	-	3c	Di
KJ1	-	MMBZ5246BW	Z-diode	16V±5%, Izt=7.8mA, Zzt=17Ω, 200mW	SOT-323	16dc	-	3c	Di
KJ3	-	CZRT5248B-G	Z-diode	17.10..18.90V, Zzt=21Ω, Izt=7.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KJ3	-	MMBZ5248B	Z-diode	18V±5%, Izt=7.0mA, Zzt=23Ω, 350mW	SOT-23	16dc	-	3c	Di
KJ3	-	MMBZ5248BW	Z-diode	18V±5%, Izt=7.0mA, Zzt=23Ω, 200mW	SOT-323	16dc	-	3c	Di
KJ5	-	CZRT5250B-G	Z-diode	19.0..21.0V, Zzt=25Ω, Izt=6.2mA, 350mW	SOT-23	16dc	-	3a	Cmc
KJ5	-	MMBZ5250B	Z-diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 350mW	SOT-23	16dc	-	3c	Di
KJ5	-	MMBZ5250BW	Z-diode	20V±5%, Izt=6.2mA, Zzt=25Ω, 200mW	SOT-323	16dc	-	3c	Di
KJA	-	BAV70W	Si-diode	Dual, Sw, 75V, 215mA, 225mW, Vf<1.25V, <4ns	SOT-323	16dg	-	3a	Di
KJC	-	BAW56W	Si-diode	Dual, Hi-Speed, 75V, 150mA, 200mW, 2pF, 4ns	SOT-323	16df	-	3a	Di
KJD	-	BAW56	Si-diode	Dual, Sw, 70V, 200mA, 250mW, Vf<1.25V, 2pF, <6ns	SOT-23	16df	-	3a	Di
KJE	-	BAV99	Si-diode	Dual, U-Sp, 80V, 150mA, Vf<1.2V(100mA), 0.5pF, 4ns	SOT-23	16dl	-	3a	Di
KJF	-	BAL99	Si-diode	Sw, Fast, 75V, 300mA, 250mW, <4ns	SOT-23	16dr	-	3a	Di
KJG	-	BAV99W	Si-diode	Dual, U-Sp, 75V, 125mA, Vf<1.2V(100mA), 0.5pF, 4ns	SOT-323	16dl	-	3a	Di
KJH	-	MMBD7000	Si-diode	Dual, Fast Sw, 100V, 300mA, 350mW, <15ns	SOT-23	16dl	-	3a	Di
KJJ	-	BAV70	Si-diode	Dual, Sw, 75V, 215mA, Vf<1.25V, <4ns	SOT-23	16dg	-	3g	Di
kk	-	PT7M6224CLC3	Vdet-IC	2.4V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
kk	-	PT7M6224CLTA3	Vdet-IC	2.4V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
kk	cf	PT7M6224CLC3E	Vdet-IC	2.4V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
kk	cf	PT7M6224CLTA3E	Vdet-IC	2.4V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
kK	-	BU46L452G	Vdet-IC	4.5V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Kk	-	BD49L29G	Vdet-IC	2.9V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
KK	-	A102WFT-2.0	LVR-IC	LDO, 2.0V±1.5%, 300mA	SOT-23	16cg	VR1	3b	Adt
KK	-	DZ23C13	Z-diode	Dual, 12.4..14.1V, Izt=5mA, Zzt=9Ω, 300mW	SOT-23	16dg	-	3a	Lge
KK	-	ELM7629HDB	Vdet-IC	2.9V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
KK-	-	RT9818C-50PV	Vdet-IC	5.0V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
KK1	-	CZRT5251B-G	Z-diode	20.90..23.10V, Zzt=29Ω, Izt=5.6mA, 350mW	SOT-23	16dc	-	3a	Cmc
KK1	-	MMBZ5251B	Z-diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 350mW	SOT-23	16dc	-	3c	Di
KK1	-	MMBZ5251BW	Z-diode	22V±5%, Izt=5.6mA, Zzt=29Ω, 200mW	SOT-323	16dc	-	3c	Di
KK2	-	CZRT5252B-G	Z-diode	22.80..25.20V, Zzt=33Ω, Izt=5.2mA, 350mW	SOT-23	16dc	-	3a	Cmc
KK2	-	MMBZ5252B	Z-diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 350mW	SOT-23	16dc	-	3c	Di
KK2	-	MMBZ5252BW	Z-diode	24V±5%, Izt=5.2mA, Zzt=33Ω, 200mW	SOT-323	16dc	-	3c	Di
KK4	-	CZRT5254B-G	Z-diode	25.65..28.35V, Zzt=41Ω, Izt=5.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KK4	-	MMBZ5254B	Z-diode	27V±5%, Izt=5.0mA, Zzt=41Ω, 350mW	SOT-23	16dc	-	3c	Di
KK4	-	MMBZ5254BW	Z-diode	27V±5%, Izt=5.0mA, Zzt=41Ω, 200mW	SOT-323	16dc	-	3c	Di
KK5	-	CZRT5255B-G	Z-diode	26.60..29.40V, Zzt=44Ω, Izt=4.5mA, 350mW	SOT-23	16dc	-	3a	Cmc
KK5	-	MMBZ5255B	Z-diode	28V±5%, Izt=4.5mA, Zzt=44Ω, 350mW	SOT-23	16dc	-	3c	Di
KK5	-	MMBZ5255BW	Z-diode	28V±5%, Izt=4.5mA, Zzt=44Ω, 200mW	SOT-323	16dc	-	3c	Di
kl	-	PT7M6224CHC3	Vdet-IC	2.4V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
kl	-	PT7M6224CHTA3	Vdet-IC	2.4V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
kl	cf	PT7M6224CHC3E	Vdet-IC	2.4V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
kl	cf	PT7M6224CHTA3E	Vdet-IC	2.4V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
KL	-	2SA1510	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, B>100, R1=4.7k	CP	16ta	-	3a	San
KL	-	2SK2731	n-MOSFET	V-MOS, LogL, 30V, 0.2A, <2.8Ω	SOT-23	16fh	-	3a	Rhm
KL	-	UNR32AN	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=4k7/47k	SSSMini3	18ta	-	3a	Pan
KL-	-	RT9818G-20PV	Vdet-IC	2.0V±1.5%, +Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
KL1	-	BAT54	Si-diode	SBR, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dc	-	3a	Di
KL2	-	BAS54A	Si-diode	Dual, Schottky, 30V, 200mA, 200mW, <5ns	SOT-23	16df	-	3g	Vs
KL2	-	BAT54A	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16df	-	3a	Di
KL3	-	BAS54C	Si-diode	Dual, Schottky, 30V, 200mA, 200mW, <5ns	SOT-23	16dg	-	3g	Vs
KL3	-	BAT54B	Si-diode	Dual, Schottky, 30V, 200mA, Vf(If=100mA)<1V, <10pF, <5ns	SOT-23	16dg	-	3g	Vs
KL3	-	BAT54C	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dg	-	3a	Di



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KL3	-	BAT54CGP	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dg	-	3a	Chm
KL31	-	BAV23S	Si-diode	Dual, GP, 200V, 225mA, Vs<1.25V(200mA), <50ns	SOT-23	16dl	-	3a	Di
KL4	-	BAS54C	Si-diode	Dual, Schottky, 30V, 200mA, 200mW, <5ns	SOT-23	16dl	-	3g	Vs
KL4	-	BAT54S	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dl	-	3a	Di
KL4	-	CH425DPT	Si-diode	Dual, SBD, 40V, 100mA, Vf<0.55V(100mA)	SOT-23	16df	-	3a	Chm
KL5	-	CH705DPT	Si-diode	Dual, SBD, 40V, 30mA, Vf<0.37V(1mA)	SOT-23	16df	-	3a	Chm
KL6	-	BAT54AW	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-323	16df	-	3a	Di
KL6	-	CHBD2004PT	Si-diode	Sw, 300V, 200mA, Vf<1V(100mA), 50ns	SOT-23	16dc	-	3a	Chm
KL7	-	BAT54CW	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-323	16dg	-	3a	Di
KL7	-	CHBD2004APT	Si-diode	Dual, Sw, 300V, 200mA, Vf<1V(100mA), 50ns	SOT-23	16df	-	3a	Chm
KL8	-	BAT54SW	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-323	16dl	-	3a	Di
KL9	-	CHBD2004SPT	Si-diode	Dual, Sw, 300V, 200mA, Vf<1V(100mA), 50ns	SOT-23	16dl	-	3a	Chm
KLP	-	SDM20N40A	Si-diode	Dual, Schottky, 40V, 0.2A, 0.2W, Vf<0.55V(200mA), <50pF	SOT-23	16df	-	3c	Di
km	-	PT7M6224NLC3	Vdet-IC	2.4V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
km	-	PT7M6224NLTA3	Vdet-IC	2.4V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
km	cf	PT7M6224NLC3E	Vdet-IC	2.4V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
km	cf	PT7M6224NLTA3E	Vdet-IC	2.4V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
kM	-	BU46L462G	Vdet-IC	4.6V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Km	-	BD49L30G	Vdet-IC	3.0V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
KM	-	2SK2009	n-MOSFET	V-MOS, 30V, 0.2A, <2Ω(50mA)	SOT-23	16fh	-	3a	Tos
KM	-	DDZX5V1B	Z-diode	5.1V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
KM	-	DZ23C15	Z-diode	Dual, 13.8..15.6V, Izt=5mA, Zzt=11Ω, 300mW	SOT-23	16dg	-	3a	Lge
KM-	-	RT9819C-20PV	Vdet-IC	2.0V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
KM1	-	CZRT5256B-G	Z-diode	28.50..31.50V, Zzt=49Ω, Izt=4.2mA, 350mW	SOT-23	16dc	-	3a	Cmc
KM1	-	MMBZ5256B	Z-diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 350mW	SOT-23	16dc	-	3c	Di
KM1	-	MMBZ5256BW	Z-diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 200mW	SOT-323	16dc	-	3c	Di
KM2	-	CZRT5257B-G	Z-diode	31.35..34.65V, Zzt=58Ω, Izt=3.8mA, 350mW	SOT-23	16dc	-	3a	Cmc
KM2	-	MMBZ5257B	Z-diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 350mW	SOT-23	16dc	-	3c	Di
KM2	-	MMBZ5257BW	Z-diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 200mW	SOT-323	16dc	-	3c	Di
KM3	-	CZRT5258B-G	Z-diode	34.20..37.80V, Zzt=70Ω, Izt=3.4mA, 350mW	SOT-23	16dc	-	3a	Cmc
KM3	-	MMBZ5258B	Z-diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 350mW	SOT-23	16dc	-	3c	Di
KM3	-	MMBZ5258BW	Z-diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 200mW	SOT-323	16dc	-	3c	Di
KM4	-	CZRT5259B-G	Z-diode	37.05..40.95V, Zzt=80Ω, Izt=3.2mA, 350mW	SOT-23	16dc	-	3a	Cmc
KM4	-	MMBZ5259B	Z-diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 350mW	SOT-23	16dc	-	3c	Di
KM4	-	MMBZ5259BW	Z-diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 200mW	SOT-323	16dc	-	3c	Di
KM5	-	CZRT5260B-G	Z-diode	40.85..45.15V, Zzt=93Ω, Izt=3.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
kn	-	PT7M6225CLC3	Vdet-IC	2.5V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
kn	-	PT7M6225CLTA3	Vdet-IC	2.5V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
kn	cf	PT7M6225CLC3E	Vdet-IC	2.5V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
kn	cf	PT7M6225CLTA3E	Vdet-IC	2.5V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
kN	-	BU46L472G	Vdet-IC	4.7V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Kn	-	BD49L31G	Vdet-IC	3.1V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
KN	-	2SC4983	Si-npn	AF, Amp, 15V, 200mA, 250mW, B=135..270, 200MHz	SOT-23	16ta	-	3a	San
KN	-	2SJ305	p-MOSFET	V-MOS, 30V, 200mA, <4Ω(0.05A)	SOT-23	16fh	-	3a	San
KN	-	2SK3018	n-MOSFET	Sw, LogL, 30V, 0.1A, 200mW, 15/80ns, 5Ω	UMT3	16fh	-	3a	Rhm
KN	-	2SK3019	n-MOSFET	Sw, LogL, 30V, 0.1A, 200mW, 15/80ns, 5Ω	SOT-416	16fh	-	3a	Rhm
KN	-	2SK3541	n-MOSFET	Sw, LogL, 30V, 0.1A, 150mW, 15/80ns, 5Ω	VMT3	18fh	-	3a	Rhm
KN	-	DDZX5V6B	Z-diode	5.6V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
KN	-	DZ23C16	Z-diode	Dual, 15.3..17.1V, Izt=5mA, Zzt=13Ω, 300mW	SOT-23	16dg	-	3a	Lge
KN-	-	RT9819C-22PV	Vdet-IC	2.2V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
KN1	-	CZRT5261B-G	Z-diode	44.65..49.35V, Zzt=105Ω, Izt=2.7mA, 350mW	SOT-23	16dc	-	3a	Cmc
KN2	-	CZRT5262B-G	Z-diode	48.45..53.55V, Zzt=125Ω, Izt=2.5mA, 350mW	SOT-23	16dc	-	3a	Cmc
KN3	-	CZRT5263B-G	Z-diode	53.20..58.80V, Zzt=150Ω, Izt=2.2mA, 350mW	SOT-23	16dc	-	3a	Cmc
KN4	-	CZRT5264B-G	Z-diode	57.0..63.0V, Zzt=170Ω, Izt=2.1mA, 350mW	SOT-23	16dc	-	3a	Cmc
KN5	-	2SC4983-5	Si-npn	AF, Amp, 15V, 200mA, 250mW, B=135..270, 200MHz	SOT-23	16ta	-	3a	San
KN5	-	CZRT5265B-G	Z-diode	58.90..65.10V, Zzt=185Ω, Izt=2.0mA, 350mW	SOT-23	16dc	-	3a	Cmc
KN6	-	2SC4983-6	Si-npn	AF, Amp, 15V, 200mA, 250mW, B=200..400, 200MHz	SOT-23	16ta	-	3a	San
KN7	-	2SC4983-7	Si-npn	AF, Amp, 15V, 200mA, 250mW, B=300..600, 200MHz	SOT-23	16ta	-	3a	San
ko	-	PT7M6225CHC3	Vdet-IC	2.5V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
ko	-	PT7M6225CHTA3	Vdet-IC	2.5V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
ko	cf	PT7M6225CHC3E	Vdet-IC	2.5V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
ko	cf	PT7M6225CHTA3E	Vdet-IC	2.5V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
KO	-	2SK881-O	n-FET	FM/VHF, 18V, 10mA, 100mW, Idss=1..3mA, Up<4V	SOT-323	16fk	-	3a	Tos
KO	-	AAT3562IGY-3.10	Vdet-IC	3.1V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ant
KO	-	DDZX6V2B	Z-diode	6.2V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
KO	-	HSMP-3830	PIN-diode	RF, 200V, 1A(1ms), <0.3pF, <1.5Ω(100mA)	SOT-23	16dc	-	3a	Agi
kp	-	PT7M6225NLC3	Vdet-IC	2.5V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
kp	-	PT7M6225NLTA3	Vdet-IC	2.5V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
kp	cf	PT7M6225NLC3E	Vdet-IC	2.5V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
kp	cf	PT7M6225NLTA3E	Vdet-IC	2.5V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
kP	-	BU46L482G	Vdet-IC	4.8V±1%, -Reset PPO, Td=200ms	SSOP-3	16vda	VD7	3q	Rhm
Kp	-	BD49L32G	Vdet-IC	3.2V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
KP	-	2SK2033	n-MOSFET	V-MOS, +Di(S->G), 20V, 100mA, <12Ω(10mA)	SOT-23	16fh	-	3a	Tos
KP	-	2SK2034	n-MOSFET	Sw, 20V, 100mA, 100mW, 8Ω(10mA), 0.16/15µs	SC-70	16fh	-	3a	Tos
KP	-	2SK2035	n-MOSFET	Sw, 20V, 100mA, 100mW, 8Ω(10mA), 0.16/15µs	2-2H1B	16fh	-	3a	Tos
KP	-	DZ23C18	Z-diode	Dual, 16.8..19.1V, Izt=5mA, Zzt=18Ω, 300mW	SOT-23	16dg	-	3a	Lge
KP	-	UNR32AV	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=2.2k/2.2k	SSSMini3	18ta	-	3a	Pan
KP-	-	RT9819B-26PV	Vdet-IC	2.6V±1.5%, -Reset PPO, Td=55ms	SOT-23	16vdc	VD7	3a	Rct
KP1	-	BZX84C11W	Z-diode	10.4..11.6V, Zzt=20Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KP1	-	CZRT5266B-G	Z-diode	64.60..71.40V, Zzt=230Ω, Izt=1.8mA, 350mW	SOT-23	16dc	-	3a	Cmc
KP1	-	CZRV3-55C11	Z-diode	11.0..11.60V, Zzt=20Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KP1	-	CZRV3-55C11	Z-diode	11.0..11.60V, Zzt=200Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KP2	-	BZX84C12W	Z-diode	11.4..12.7V, Zzt=25Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KP2	-	CZRT5267B-G	Z-diode	71.25..78.75V, Zzt=270Ω, Izt=1.7mA, 350mW	SOT-23	16dc	-	3a	Cmc
KP2	-	CZRV3-55C12	Z-diode	12.0..12.70V, Zzt=25Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KP2	-	CZRV3-55C12	Z-diode	12.0..12.70V, Zzt=250Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KP3	-	BZX84C13W	Z-diode	12.4..14.1V, Zzt=30Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KP3	-	CZRV3-55C13	Z-diode	13.0..14.10V, Zzt=30Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KP3	-	CZRV3-55C13	Z-diode	13.0..14.10V, Zzt=300Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KP4	-	BZX84C15W	Z-diode	13.8..15.6V, Zzt=30Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KP4	-	CZRV3-55C15	Z-diode	15.0..15.60V, Zzt=30Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KP4	-	CZRV3-55C15	Z-diode	15.0..15.60V, Zzt=300Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KP5	-	BZX84C16W	Z-diode	15.3..17.1V, Zzt=40Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KP5	-	CZRV3-55C16	Z-diode	16.0..17.10V, Zzt=40Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KP5	-	CZRV3-55C16	Z-diode	16.0..17.10V, Zzt=400Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KP6	-	BZX84C18W	Z-diode	16.8..19.1V, Zzt=45Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KP6	-	CZRV3-55C18	Z-diode	18.0..19.10V, Zzt=45Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KP6	-	CZRV3-55C18	Z-diode	18.0..19.10V, Zzt=450Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KP7	-	BZX84C20W	Z-diode	18.8..21.2V, Zzt=55Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KP7	-	CZRV3-55C20	Z-diode	20.0..21.20V, Zzt=55Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KP7	-	CZRV3-55C20	Z-diode	20.0..21.20V, Zzt=550Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KP8	-	BZX84C22W	Z-diode	20.8..23.3V, Zzt=55Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KP8	-	CZRV3-55C22	Z-diode	22.0..23.30V, Zzt=55Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KP8	-	CZRV3-55C22	Z-diode	22.0..23.30V, Zzt=550Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KP9	-	BZX84C24W	Z-diode	22.8..25.6V, Zzt=70Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KP9	-	CZRV3-55C24	Z-diode	24.0..25.60V, Zzt=70Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KP9	-	CZRV3-55C24	Z-diode	24.0..25.60V, Zzt=700Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KPA	-	BZX84C27W	Z-diode	25.1..28.9V, Zzt=80Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KPA	-	CZRV3-55C27	Z-diode	27.0..28.90V, Zzt=80Ω, Izt=2mA, 200mW	SOT-323	16dc	-	3a	Cmc
KPA	-	CZRV3-55C27	Z-diode	27.0..28.90V, Zzt=800Ω, Izt=2.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KPB	-	BZX84C30W	Z-diode	28..32V, Zzt=80Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KPB	-	CZRV3-55C30	Z-diode	30.0..32.0V, Zzt=80Ω, Izt=2mA, 200mW	SOT-323	16dc	-	3a	Cmc
KPB	-	CZRV3-55C30	Z-diode	30.0..32.0V, Zzt=800Ω, Izt=2.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KPC	-	BZX84C33W	Z-diode	31..35V, Zzt=80Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KPC	-	CZRV3-55C33	Z-diode	33.0..35.0V, Zzt=80Ω, Izt=2mA, 200mW	SOT-323	16dc	-	3a	Cmc
KPC	-	CZRV3-55C33	Z-diode	33.0..35.0V, Zzt=800Ω, Izt=2.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KPD	-	BZX84C36W	Z-diode	34..38V, Zzt=90Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KPD	-	CZRV3-55C36	Z-diode	36.0..38.0V, Zzt=90Ω, Izt=2mA, 200mW	SOT-323	16dc	-	3a	Cmc
KPD	-	CZRV3-55C36	Z-diode	36.0..38.0V, Zzt=900Ω, Izt=2.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KPE	-	BZX84C39W	Z-diode	37..41V, Zzt=130Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KPE	-	CZRV3-55C39	Z-diode	39.0..41.0V, Zzt=130Ω, Izt=2mA, 150mW	SOT-323	16dc	-	3a	Cmc
KPE	-	CZRV3-55C39	Z-diode	39.0..41.0V, Zzt=1300Ω, Izt=2.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
kq	-	PT7M6226CLC3	Vdet-IC	2.6V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
kq	-	PT7M6226CLTA3	Vdet-IC	2.6V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
kq	cf	PT7M6226CLC3E	Vdet-IC	2.6V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
kq	cf	PT7M6226CLTA3E	Vdet-IC	2.6V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
KQ	-	2SJ343	p-MOSFET	Sw, 50V, 50mA, 200mW, 20Ω, 0.15/0.13µs	SC-59	16fh	-	3a	Tos
KQ	-	2SJ344	p-MOSFET	Sw, 50V, 50mA, 100mW, 20Ω, 0.15/0.13µs	SOT-323	16fh	-	3a	Tos
KQ-	-	RT9169-24PVL	LVR-IC	LDO, 2.4V±2%, 100mA	SOT-23	16cg	VR1	3a	Rct
kr	-	PT7M6226CHC3	Vdet-IC	2.6V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
kr	-	PT7M6226CHTA3	Vdet-IC	2.6V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
kr	cf	PT7M6226CHC3E	Vdet-IC	2.6V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
kr	cf	PT7M6226CHTA3E	Vdet-IC	2.6V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
kR	-	BU45L234G	Vdet-IC	2.3V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
Kr	-	BD49L33G	Vdet-IC	3.3V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
KR	-	A102WFT-2.5	LVR-IC	LDO, 2.5V±1.5%, 300mA	SOT-23	16cg	VR1	3b	Adt
KR	-	DZ23C20	Z-diode	Dual, 18.8..21.2V, Izt=5mA, Zzt=20Ω, 300mW	SOT-23	16dg	-	3a	Lge
KR-	-	RT9818A-15PV	Vdet-IC	1.5V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
KR1	-	BZX84C4V7W	Z-diode	4.4..5.0V, Zzt=80Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KR1	-	CZRV3-55C4V7	Z-diode	4.7..5.0V, Zzt=80Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KR1	-	CZRV3-55C4V7	Z-diode	4.7..5.0V, Zzt=800Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KR2	-	BZX84C5V1W	Z-diode	4.8..5.4V, Zzt=60Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KR2	-	CZRV3-55C5V1	Z-diode	5.1..5.40V, Zzt=60Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KR2	-	CZRV3-55C5V1	Z-diode	5.1..5.40V, Zzt=600Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KR3	-	BZX84C5V6W	Z-diode	5.2..6.0V, Zzt=40Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KR3	-	CZRV3-55C5V6	Z-diode	5.6..6.0V, Zzt=40Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KR3	-	CZRV3-55C5V6	Z-diode	5.6..6.0V, Zzt=400Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KR4	-	BZX84C6V2W	Z-diode	5.8..6.6V, Zzt=10Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KR4	-	CZRV3-55C6V2	Z-diode	6.2..6.60V, Zzt=10Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KR4	-	CZRV3-55C6V2	Z-diode	6.2..6.60V, Zzt=100Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KR5	-	BZX84C6V8W	Z-diode	6.4..7.2V, Zzt=15Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KR5	-	CZRV3-55C6V8	Z-diode	6.8..7.20V, Zzt=15Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KR5	-	CZRV3-55C6V8	Z-diode	6.8..7.20V, Zzt=150Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KR6	-	BZX84C7V5W	Z-diode	7.0..7.9V, Zzt=15Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KR6	-	CZRV3-55C7V5	Z-diode	7.5..7.90V, Zzt=15Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KR6	-	CZRV3-55C7V5	Z-diode	7.5..7.90V, Zzt=150Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KR7	-	BZX84C8V2W	Z-diode	7.7..8.7V, Zzt=15Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KR7	-	CZRV3-55C8v2	Z-diode	8.2..8.70V, Zzt=15Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KR7	-	CZRV3-55C8v2	Z-diode	8.2.. 8.70V, Zzt=150Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KR8	-	BZX84C9V1W	Z-diode	8.5..9.6V, Zzt=15Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KR8	-	CZRV3-55C9v1	Z-diode	9.1..9.60V, Zzt=150Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KR8	-	CZRV3-55C9V1	Z-diode	9.1..9.60V, Zzt=15Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KR9	-	BZX84C10W	Z-diode	9.4..10.6V, Zzt=20Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KR9	-	CZRV3-55C10	Z-diode	10.0..10.60V, Zzt=20Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KR9	-	CZRV3-55C10	Z-diode	10.0..10.60V, Zzt=200Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KRB	-	BZX84C2V4W	Z-diode	2.2..2.6V, Zzt=100Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KRB	-	CZRV3-55C2V4	Z-diode	2.4..2.60V, Zzt=100Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KRB	-	CZRV3-55C2V4	Z-diode	2.4..2.60V, Zzt=1000Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KRC	-	BZX84C2V7W	Z-diode	2.5..2.9V, Zzt=100Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KRC	-	CZRV3-55C2V7	Z-diode	2.7..2.90V, Zzt=100Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KRC	-	CZRV3-55C2V7	Z-diode	2.7..2.90V, Zzt=1000Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KRD	-	BZX84C3V0W	Z-diode	2.8..3.2V, Zzt=95Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KRD	-	CZRV3-55C3V0	Z-diode	3.0..3.20V, Zzt=95Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KRD	-	CZRV3-55C3V0	Z-diode	3.0..3.20V, Zzt=950Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KRE	-	BZX84C3V3W	Z-diode	3.1..3.5V, Zzt=95Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KRE	-	CZRV3-55C3V3	Z-diode	3.3..3.50V, Zzt=95Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KRE	-	CZRV3-55C3V3	Z-diode	3.3.. 3.50V, Zzt=950Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KRF	-	BZX84C3V6W	Z-diode	3.4..3.8V, Zzt=90Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KRF	-	CZRV3-55C3V6	Z-diode	3.6..3.80V, Zzt=90Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KRF	-	CZRV3-55C3V6	Z-diode	3.6..3.80V, Zzt=900Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KRG	-	BZX84C3V9W	Z-diode	3.7..4.1V, Zzt=90Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KRG	-	CZRV3-55C3V9	Z-diode	3.9..4.10V, Zzt=90Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KRG	-	CZRV3-55C3V9	Z-diode	3.9..4.10V, Zzt=900Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
KRH	-	BZX84C4V3W	Z-diode	4.0..4.6V, Zzt=90Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3c	Di
KRH	-	CZRV3-55C4V3	Z-diode	4.3..4.60V, Zzt=90Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Cmc
KRH	-	CZRV3-55C4V3	Z-diode	4.3..4.60V, Zzt=900Ω, Izt=5.0mA, 200mW	SOT-23	16dq	-	3a	Cmc
ks	-	PT7M6226NLC3	Vdet-IC	2.6V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
ks	-	PT7M6226NLTA3	Vdet-IC	2.6V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
ks	cf	PT7M6226NLC3E	Vdet-IC	2.6V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
ks	cf	PT7M6226NLTA3E	Vdet-IC	2.6V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
kS	-	BU45L244G	Vdet-IC	2.4V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
KS	-	2SA1813	Si-pnp	AF-Drv, Mute, 30V, 150mA, 200mW, B=500..1200, 210MHz	MCP	16ta	-	3a	San
KS	-	2SA1814	Si-pnp	AF, Mute, 30V, 150mA, 250mW, B=500..1200, 210MHz	SOT-23	16ta	-	3a	San
KS	-	2SJ345	p-MOSFET	V-MOS, int.Di (G > S), 20V, 50MA, <40Ω	SOT-23	16fh	-	3a	Tos
KS	-	TCM810JVLB	Vdet-IC	4.0V±2%, +Reset PPO	SC-70	16vdc	VD7	3b	Mcc
KS	-	TCM810JVNB	Vdet-IC	4.0V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
KS-	-	RT9819D-27PVL	Vdet-IC	2.7V±1.5%, -Reset PPO, Td=450ms	SOT-23	16vda	VD7	3a	Rct
KSJ	-	BAT400D	Si-diode	SBR, 40V, 500mA, Vf<0.55V(500mA)	SOT-23	16dc	-	3c	Di
KSS	-	SDM20E40C	Si-diode	Dual, Schottky, 40V, 0.4A, 0.4W, Vf<0.5V(200mA), <100pF	SC-59	16df	-	3c	Di
KSW	-	SDM40E20LS	Si-diode	Dual, Schottky, Sw, 20V, 0.4A, Vf<0.43V(0.5A), 170pF	SOT-23	16dl	-	3c	Di
kt	-	PT7M6227CLC3	Vdet-IC	2.7V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
kt	-	PT7M6227CLTA3	Vdet-IC	2.7V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
kt	cf	PT7M6227CLC3E	Vdet-IC	2.7V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
kt	cf	PT7M6227CLTA3E	Vdet-IC	2.7V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
kT	-	BU45L254G	Vdet-IC	2.5V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
KT	-	CHT4124PT	Si-npn	AF, Sw, 25V, 200mA, B=120..360, 300MHz	SOT-23	16ta	-	3a	Chm
KT	-	TCM810ZVLB	Vdet-IC	2.32V±2%, +Reset PPO	SC-70	16vdc	VD7	3b	Mcc
KT	-	UNR32A0	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1=47k	SSSMini3	18ta	-	3a	Pan
KT1	-	BAS16W	Si-diode	Sw, Fast, 75V, 300mA, Vf<1.25V(150mA), <4ns, 2pF	SOT-323	16dc	-	3a	Di
KT1	-	CHDTA144EKTPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=47k/47k	SOT-23	16ta	-	3a	Chm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KT1	-	MMBD4148W	Si-diode	Sw, Fast, 75V, 300mA, Vf<1.25V(150mA), <4ns, 2pF	SOT-323	16dc	-	3a	Di
KT2	-	2SC4270-2	Si-npn	VHF/UHF-Osc, 25V, 50mA, 250mW, B=40..80, 3GHz	SOT-23	16ta	-	3a	San
KT2	-	2SC4407-2	Si-npn	UHF, Mix/Osc, 25V, 50mA, 150mW, B=40..80, 3GHz	MCP	16ta	-	3a	San
KT2	-	BAS19	Si-diode	Sw, Fast, 120V, 250mA, 250mW, <50ns	SOT-23	16dc	-	3a	Di
KT2	-	BAS19W	Si-diode	Sw, Fast, 120V, 250mA, 250mW, <50ns	SOT-323	16dc	-	3a	Di
KT2	-	BAS20	Si-diode	Sw, Fast, 150V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	Di
KT2	-	BAS20W	Si-diode	Sw, Fast, 150V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-323	16dc	-	3a	Di
KT3	-	2SC4270-3	Si-npn	VHF/UHF-Osc, 25V, 50mA, 250mW, B=60..120, 3GHz	SOT-23	16ta	-	3a	San
KT3	-	2SC4407-3	Si-npn	UHF, Mix/Osc, 25V, 50mA, 150mW, B=60..120, 3GHz	MCP	16ta	-	3a	San
KT3	-	BAS19	Si-diode	Sw, Fast, 120V, 250mA, 250mW, <50ns	SOT-23	16dc	-	3a	Di
KT3	-	BAS19W	Si-diode	Sw, Fast, 120V, 250mA, 250mW, <50ns	SOT-323	16dc	-	3a	Di
KT3	-	BAS20	Si-diode	Sw, Fast, 150V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	Di
KT3	-	BAS20W	Si-diode	Sw, Fast, 150V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-323	16dc	-	3a	Di
KT3	-	BAS21	Si-diode	Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-23	16dc	-	3a	Di
KT3	-	BAS21W	Si-diode	Sw, Fast, 250V, 250mA, 250mW, <50ns	SOT-323	16dc	-	3a	Di
KT4	-	2SC4270-4	Si-npn	VHF/UHF-Osc, 25V, 50mA, 250mW, B=100..200, 3GHz	SOT-23	16ta	-	3a	San
KT4	-	2SC4407-4	Si-npn	UHF, Mix/Osc, 25V, 50mA, 150mW, B=100..200, 3GHz	MCP	16ta	-	3a	San
KT6	-	BAV23C	Si-diode	Dual, GP, 200V, 225mA, Vs<1.25V(200mA), <50ns	SOT-23	16dg	-	3a	Di
KT7	-	BAV23A	Si-diode	Dual, GP, 200V, 225mA, Vs<1.25V(200mA), <50ns	SOT-23	16df	-	3a	Di
ku	-	PT7M6227CHC3	Vdet-IC	2.7V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
ku	-	PT7M6227CHTA3	Vdet-IC	2.7V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
ku	cf	PT7M6227CHC3E	Vdet-IC	2.7V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
ku	cf	PT7M6227CHTA3E	Vdet-IC	2.7V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
KU	-	SSM3K02F	n-MOSFET	LogL, 30V, 1A, <0.25Ω(500mA)	SOT-23	16fh	-	3a	Tos
KU	-	TCM810RVLB	Vdet-IC	2.63V±2%, +Reset PPO	SC-70	16vdc	VD7	3b	Mcc
KU	-	TCM810RVNB	Vdet-IC	2.63V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
KU-	-	RT9819E-27PV	Vdet-IC	2.7V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Rct
kv	-	PT7M6227NLC3	Vdet-IC	2.7V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
kv	-	PT7M6227NLTA3	Vdet-IC	2.7V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
kv	cf	PT7M6227NLC3E	Vdet-IC	2.7V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
kv	cf	PT7M6227NLTA3E	Vdet-IC	2.7V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
KV	-	1SV264	PIN-diode	Dual, VHF/UHF, 50V, 50mA, 100mW, 0.23pF, 2.5Ω(100MHz)	MCP	16dl	-	3a	San
KV	-	1SV267	PIN-diode	Dual, VHF/UHF, 50V, 50mA, 100mW, 0.23pF, 2.5Ω(100MHz)	SOT-23	16dl	-	3a	San
KV	-	A102WFT-2.8	LVR-IC	LDO, 2.8V±1.5%, 300mA	SOT-23	16cg	VR1	3b	Adt
KV	-	TCM810SVLB	Vdet-IC	2.93V±2%, +Reset PPO	SC-70	16vdc	VD7	3b	Mcc
KV	-	TCM810SVNB	Vdet-IC	2.93V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
KV-	-	RT9819E-40PV	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Rct
KV1	-	DZ23C2V7	Z-diode	Dual, 2.5..2.9V, Izt=5mA, Zzt=75Ω, 300mW	SOT-23	16dg	-	3c	Di
KV2	-	DZ23C3V0	Z-diode	Dual, 2.8..3.2V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3c	Di
KV3	-	DZ23C3V3	Z-diode	Dual, 3.1..3.5V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3c	Di
KV4	-	DZ23C3V6	Z-diode	Dual, 3.4..3.8V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3c	Di
KV5	-	DZ23C3V9	Z-diode	Dual, 3.7..4.1V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3c	Di
KV6	-	DZ23C4V3	Z-diode	Dual, 4.0..4.6V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3c	Di
KV7	-	DZ23C4V7	Z-diode	Dual, 4.4..5.0V, Izt=5mA, Zzt=70Ω, 300mW	SOT-23	16dg	-	3c	Di
KV8	-	DZ23C5V1	Z-diode	Dual, 4.8..5.4V, Izt=5mA, Zzt=30Ω, 300mW	SOT-23	16dg	-	3c	Di
KV9	-	DZ23C5V6	Z-diode	Dual, 5.2..6.0V, Izt=5mA, Zzt=10Ω, 300mW	SOT-23	16dg	-	3c	Di
KVA	-	DZ23C6V2	Z-diode	Dual, 5.8..6.6V, Izt=5mA, Zzt=4.8Ω, 300mW	SOT-23	16dg	-	3c	Di
KVB	-	DZ23C6V8	Z-diode	Dual, 6.4..7.2V, Izt=5mA, Zzt=4.5Ω, 300mW	SOT-23	16dg	-	3c	Di
KVC	-	DZ23C7V5	Z-diode	Dual, 7.0..7.9V, Izt=5mA, Zzt=4Ω, 300mW	SOT-23	16dg	-	3c	Di
KVD	-	DZ23C8V2	Z-diode	Dual, 7.7..8.7V, Izt=5mA, Zzt=4.5Ω, 300mW	SOT-23	16dg	-	3c	Di
KVE	-	DZ23C9V1	Z-diode	Dual, 8.5..9.6V, Izt=5mA, Zzt=4.8Ω, 300mW	SOT-23	16dg	-	3c	Di
KVF	-	DZ23C10	Z-diode	Dual, 9.4..10.6V, Izt=5mA, Zzt=5.2Ω, 300mW	SOT-23	16dg	-	3c	Di
KVG	-	DZ23C11	Z-diode	Dual, 10.4..11.6V, Izt=5mA, Zzt=6Ω, 300mW	SOT-23	16dg	-	3c	Di
KVH	-	DZ23C12	Z-diode	Dual, 11.4..12.7V, Izt=5mA, Zzt=7Ω, 300mW	SOT-23	16dg	-	3c	Di
KVI	-	DZ23C13	Z-diode	Dual, 12.4..14.1V, Izt=5mA, Zzt=9Ω, 300mW	SOT-23	16dg	-	3c	Di
KVJ	-	DZ23C15	Z-diode	Dual, 13.8..15.6V, Izt=5mA, Zzt=11Ω, 300mW	SOT-23	16dg	-	3c	Di
KVK	-	DZ23C16	Z-diode	Dual, 15.3..17.1V, Izt=5mA, Zzt=13Ω, 300mW	SOT-23	16dg	-	3c	Di
KVL	-	DZ23C18	Z-diode	Dual, 16.8..19.1V, Izt=5mA, Zzt=18Ω, 300mW	SOT-23	16dg	-	3c	Di
KVM	-	DZ23C20	Z-diode	Dual, 18.8..21.2V, Izt=5mA, Zzt=20Ω, 300mW	SOT-23	16dg	-	3c	Di
KVN	-	DZ23C22	Z-diode	Dual, 20.8..23.3V, Izt=5mA, Zzt=25Ω, 300mW	SOT-23	16dg	-	3c	Di
KVO	-	DZ23C24	Z-diode	Dual, 22.8..25.6V, Izt=5mA, Zzt=28Ω, 300mW	SOT-23	16dg	-	3c	Di
KVP	-	DZ23C27	Z-diode	Dual, 25.1..28.9V, Izt=5mA, Zzt=30Ω, 300mW	SOT-23	16dg	-	3c	Di
KVQ	-	DZ23C30	Z-diode	Dual, 28.0..32.0V, Izt=5mA, Zzt=35Ω, 300mW	SOT-23	16dg	-	3c	Di
KVR	-	DZ23C33	Z-diode	Dual, 31.0..35.0V, Izt=5mA, Zzt=40Ω, 300mW	SOT-23	16dg	-	3c	Di
KVS	-	DZ23C36	Z-diode	Dual, 34.0..38.0V, Izt=5mA, Zzt=40Ω, 300mW	SOT-23	16dg	-	3c	Di
KVT	-	DZ23C39	Z-diode	Dual, 37.0..41.0V, Izt=5mA, Zzt=50Ω, 300mW	SOT-23	16dg	-	3c	Di
KVU	-	DZ23C43	Z-diode	Dual, 40.0..46.0V, Izt=5mA, Zzt=60Ω, 300mW	SOT-23	16dg	-	3c	Di
KVV	-	DZ23C47	Z-diode	Dual, 44.0..50.0V, Izt=5mA, Zzt=70Ω, 300mW	SOT-23	16dg	-	3c	Di
KVW	-	DZ23C51	Z-diode	Dual, 48.0..54.0V, Izt=5mA, Zzt=70Ω, 300mW	SOT-23	16dg	-	3c	Di
kw	-	PT7M6228CLC3	Vdet-IC	2.8V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
kw	-	PT7M6228CLTA3	Vdet-IC	2.8V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
kw	cf	PT7M6228CLC3E	Vdet-IC	2.8V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
kw	cf	PT7M6228CLTA3E	Vdet-IC	2.8V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
kW	-	BU45L264G	Vdet-IC	2.6V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
KW	-	DDZX13B	Z-diode	13V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
KW	-	SSM3K01F	n-MOSFET	LogL, 30V, 1.3A, <0.15Ω(650mA)	SOT-23	16fh	-	3a	Tos
KW-	-	RT9161-42PV	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
kx	-	PT7M6228CHC3	Vdet-IC	2.8V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
kx	-	PT7M6228CHTA3	Vdet-IC	2.8V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
kx	cf	PT7M6228CHC3E	Vdet-IC	2.8V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
kx	cf	PT7M6228CHTA3E	Vdet-IC	2.8V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
kX	-	BU45L274G	Vdet-IC	2.7V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
KX	-	A102WFT-3.0	LVR-IC	LDO, 3.0V±1.5%, 300mA	SOT-23	16cg	VR1	3b	Adt
KX	-	DZ23C22	Z-diode	Dual, 20.8..23.3V, Izt=5mA, Zzt=25Ω, 300mW	SOT-23	16dg	-	3a	Lge
KX	-	TCM810TVLB	Vdet-IC	3.08V±2%, +Reset PPO	SC-70	16vdc	VD7	3b	Mcc
KX	-	TCM810TVNB	Vdet-IC	3.08V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
KX-	-	RT9819C-40PV	Vdet-IC	4.0V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
KX2	-	MMTT2222A	Si-npn	GP, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3d	Di
ky	-	PT7M6228NLC3	Vdet-IC	2.8V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
ky	-	PT7M6228NLTA3	Vdet-IC	2.8V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
ky	cf	PT7M6228NLC3E	Vdet-IC	2.8V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
ky	cf	PT7M6228NLTA3E	Vdet-IC	2.8V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
kY	-	BU45L284G	Vdet-IC	2.8V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
Ky	-	BD49L34G	Vdet-IC	3.4V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
KY	-	2SK881-Y	n-FET	FM/VHF, 18V, 10mA, 100mW, Idss=2.5..6mA, Up<4V	SOT-323	16fk	-	3a	Tos
KY	-	A102WFT-3.1	LVR-IC	LDO, 3.1V±1.5%, 300mA	SOT-23	16cg	VR1	3b	Adt
KY	-	DZ23C24	Z-diode	Dual, 22.8..25.6V, Izt=5mA, Zzt=28Ω, 300mW	SOT-23	16dg	-	3a	Lge
KY	-	TCM810MVLB	Vdet-IC	4.38V±2%, +Reset PPO	SC-70	16vdc	VD7	3b	Mcc
KY	-	TCM810MVNB	Vdet-IC	4.38V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
KY1	-	BZX84C11	Z-diode	10.4..11.6V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KY2	-	2SC3771-2	Si-npn	VHF/UHF, 30V, 30mA, 250mW, 2.2GHz, B=40..80	SOT-23	16ta	-	3a	San
KY2	-	BZX84C12	Z-diode	11.4..12.7V, Zzt=25Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KY3	-	2SC3771-3	Si-npn	VHF/UHF, 30V, 30mA, 250mW, 2.2GHz, B=60..120	SOT-23	16ta	-	3a	San
KY3	-	BZX84C13	Z-diode	12.4..14.1V, Zzt=30Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KY4	-	2SC3771-4	Si-npn	VHF/UHF, 30V, 30mA, 250mW, 2.2GHz, B=100..200	SOT-23	16ta	-	3a	San
KY4	-	BZX84C15	Z-diode	13.8..15.6V, Zzt=30Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KY5	-	BZX84C16	Z-diode	15.3..17.1V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KY6	-	BZX84C18	Z-diode	16.8..19.1V, Zzt=45Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KY7	-	BZX84C20	Z-diode	18.8..21.2V, Zzt=55Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KY8	-	BZX84C22	Z-diode	20.8..23.3V, Zzt=55Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KY9	-	BZX84C24	Z-diode	22.8..25.6V, Zzt=70Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KYA	-	BZX84C27	Z-diode	25.1..28.9V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KYB	-	BZX84C30	Z-diode	28..32V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KYC	-	BZX84C33	Z-diode	31..35V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KYD	-	BZX84C36	Z-diode	34..38V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KYE	-	BZX84C39	Z-diode	37..41V, Zzt=130Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
kz	-	PT7M6229CLC3	Vdet-IC	2.9V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
kz	-	PT7M6229CLTA3	Vdet-IC	2.9V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
kz	cf	PT7M6229CLC3E	Vdet-IC	2.9V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
kz	cf	PT7M6229CLTA3E	Vdet-IC	2.9V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
KZ	-	DZ23C27	Z-diode	Dual, 25.1..28.9V, Izt=5mA, Zzt=30Ω, 300mW	SOT-23	16dg	-	3a	Lge
KZ	-	TCM810LVLB	Vdet-IC	4.63V±2%, +Reset PPO	SC-70	16vdc	VD7	3b	Mcc
KZ	-	TCM810LVNB	Vdet-IC	4.63V±2%, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
KZ	-	UNR32AT	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=22k/47k	SSSMini3	18ta	-	3a	Pan
KZ-	-	RT9818C-26PV	Vdet-IC	2.6V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
KZ1	-	BZX84C4V7	Z-diode	4.4..5.0V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KZ2	-	BZX84C5V1	Z-diode	4.8..5.4V, Zzt=60Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KZ3	-	BZX84C5V6	Z-diode	5.2..6.0V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KZ4	-	BZX84C6V2	Z-diode	5.8..6.6V, Zzt=10Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KZ5	-	BZX84C6V8	Z-diode	6.4..7.2V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KZ6	-	BZX84C7V5	Z-diode	7.0..7.9V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KZ7	-	BZX84C8V2	Z-diode	7.7..8.7V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KZ8	-	BZX84C9V1	Z-diode	8.5..9.6V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KZ9	-	BZX84C10	Z-diode	9.4..10.6V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KZB	-	BZX84C2V4	Z-diode	2.2..2.6V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KZC	-	BZX84C2V7	Z-diode	2.5..2.9V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KZD	-	BZX84C3V0	Z-diode	2.8..3.2V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KZE	-	BZX84C3V3	Z-diode	3.1..3.5V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KZF	-	BZX84C3V6	Z-diode	3.4..3.8V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
KZG	-	BZX84C3V9	Z-diode	3.7..4.1V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KZH	-	BZX84C4V3	Z-diode	4.0..4.6V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3c	Di
l	-	AX6902EA	Vdet-IC	2.93V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Axl
L	-	SB02W03C	Si-diode	Dual, SBR, HF, 30V, 200mA, Vf<0.55V(200mA), 6.3pF, 10ns	CP	16dg	-	3a	San
L	cr	ELM7532NEB	Vdet-IC	3.2V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
L	cs	ELM7532CEB	Vdet-IC	3.2V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
L0	-	AP8821N-30GC	Vdet-IC	3.0V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
L0	-	AP8821N-30GT	Vdet-IC	3.0V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
L0	-	AP8821N-30PC	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
L0	-	AP8821N-30PT	Vdet-IC	3.0V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
L0	-	BAT721S	Si-diode	Dual, Schottky, Sw, U-Fst, 40V, 0.2A, Vf<0.55V(0.2A), <0.3ns	SOT-23	16dl	-	3a	PhH
L0	-	ELM7620LAB	Vdet-IC	2.0V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
L0	-	HSMP-386B	PIN-diode	RF, 50V, 1A, Rs(typ)=3Ω, 0.2pF	SOT-323	16dc	-	3a	Agi
L0	-	R3111N302C	Vdet-IC	3V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
L0	-	R3130N40AC	Vdet-IC	4V±1.5%, -Reset ODO, 50ms	SOT-23	16vdc	VD6	3b	Ric
L0	-	RN1101FS	Si-npn-Digi	Sw, 20V, 50mA, 50mW, R1/R2=4.7k/4.7k	fSM	19ta	-	3a	Tos
L0-	-	RT9819B-29PV	Vdet-IC	2.9V±1.5%, -Reset PPO, Td=55ms	SOT-23	16vdc	VD7	3a	Rct
L03	-	XC61CN1002M	Vdet-IC	1.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
L05	-	ZLLS500TA	Si-diode	SBR, 40V, 700mA, Vf<0.63V(750mA)	SOT-23	16dc	-	3a	Zx
L05	-	ZLLS500TC	Si-diode	SBR, 40V, 700mA, Vf<0.63V(750mA)	SOT-23	16dc	-	3a	Zx
L09	-	82C09-AE3-5	Vdet-IC	0.9V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L09G	-	82C09G-AE3-5	Vdet-IC	0.9V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L09L	-	82C09L-AE3-5	Vdet-IC	0.9V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L0A	-	LM3480IM3-3.3	LVR-IC	Quasi-LDO, 3.3V±5%, 100mA	SOT-23	16cj	VR1	3d	Nsc
L0B	-	LM3480IM3-5.0	LVR-IC	Quasi-LDO, 5.0V±5%, 100mA	SOT-23	16cj	VR1	3d	Nsc
L0C	-	LM3480IM3-12	LVR-IC	Quasi-LDO, 12V±5%, 100mA	SOT-23	16cj	VR1	3d	Nsc
L0D	-	LM3480IM3-15	LVR-IC	Quasi-LDO, 15V±5%, 100mA	SOT-23	16cj	VR1	3d	Nsc
L0p	-	BAT721S	Si-diode	Dual, Schottky, Sw, U-Fst, 40V, 0.2A, Vf<0.55V(0.2A), <0.3ns	SOT-23	16dl	-	3a	PhH
L0t	-	BAT721S	Si-diode	Dual, Schottky, Sw, U-Fst, 40V, 0.2A, Vf<0.55V(0.2A), <0.3ns	SOT-23	16dl	-	3a	PhM
L0W	-	BAT721S	Si-diode	Dual, Schottky, Sw, U-Fst, 40V, 0.2A, Vf<0.55V(0.2A), <0.3ns	SOT-23	16dl	-	3a	PhC
L1	-	AP8821N-31GC	Vdet-IC	3.1V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
L1	-	AP8821N-31GT	Vdet-IC	3.1V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
L1	-	AP8821N-31PC	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
L1	-	AP8821N-31PT	Vdet-IC	3.1V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
L1	-	BAT54T	Si-diode	SBD, 30V, 200mA, Vf<0.52V(100mA), <5ns	SOT-523	16dc	-	3b	Di
L1	-	BFS36	Si-npn	AF, LN, 45V, 0.5A, >30MHz	SOT-323	16te	-	3a	Fer
L1	-	BSS65	Si-pnp	Sw, 12V, 100mA, 400MHz, <60/90ns	SOT-23	16ta	-	3a	Fer
L1	-	ELM7621LAB	Vdet-IC	2.1V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
L1	-	R3111N312C	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
L1	-	R3130N44AC	Vdet-IC	4.4V±1.5%, -Reset ODO, 50ms	SOT-23	16vdc	VD6	3b	Ric
L1	-	RN1102FS	Si-npn-Digi	Sw, 20V, 50mA, 50mW, R1/R2=10k/10k	fSM	19ta	-	3a	Tos
L1	-	RT9819E-23PV	Vdet-IC	2.3V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Rct
L10	-	82C10-AE3-5	Vdet-IC	1.0V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L10	-	ZLLS1000TA	Si-diode	SBR, 40V, 1.6A, Vf<0.66V(1.5A)	SOT-23	16dc	-	3a	Zx
L10	-	ZLLS1000TC	Si-diode	SBR, 40V, 1.6A, Vf<0.66V(1.5A)	SOT-23	16dc	-	3a	Zx
L10G	-	82C10G-AE3-5	Vdet-IC	1.0V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L10L	-	82C10L-AE3-5	Vdet-IC	1.0V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L11	-	82C11-AE3-5	Vdet-IC	1.1V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L11G	-	82C11G-AE3-5	Vdet-IC	1.1V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L11L	-	82C11L-AE3-5	Vdet-IC	1.1V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L12	-	82C12-AE3-5	Vdet-IC	1.2V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L12G	-	82C12G-AE3-5	Vdet-IC	1.2V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L12L	-	82C12L-AE3-5	Vdet-IC	1.2V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L13	-	82C13-AE3-5	Vdet-IC	1.3V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L13	-	XC61CN1102M	Vdet-IC	1.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
L13G	-	82C13G-AE3-5	Vdet-IC	1.3V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L13L	-	82C13L-AE3-5	Vdet-IC	1.3V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L14	-	82C14-AE3-5	Vdet-IC	1.4V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L14	-	DTB114GK	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R2=10k	SOT-346	16ta	-	3a	Rhm
L14G	-	82C14G-AE3-5	Vdet-IC	1.4V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L14L	-	82C14L-AE3-5	Vdet-IC	1.4V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L15	-	2SC3624A-15	Si-npn	AF-Amp, Sw, 60V, 150mA, 200mW, 250MHz, B=1000.2000	SOT-23	16ta	-	3a	Nec
L15	-	2SC4181A-15	Si-npn	AF, Sw, 60V, 150mA, 150mW, B=1000..2000, 250MHz	SOT-323	16ta	-	3a	Nec
L15	-	82C15-AE3-5	Vdet-IC	1.5V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L15G	-	82C15G-AE3-5	Vdet-IC	1.5V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L15L	-	82C15L-AE3-5	Vdet-IC	1.5V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L16	-	2SC3624A-16	Si-npn	AF-Amp, Sw, 60V, 150mA, 200mW, 250MHz, B=1600..3200	SOT-23	16ta	-	3a	Nec
L16	-	2SC4181A-16	Si-npn	AF, Sw, 60V, 150mA, 150mW, B=1600..3200, 250MHz	SOT-323	16ta	-	3a	Nec
L16	-	82C16-AE3-5	Vdet-IC	1.6V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L16G	-	82C16G-AE3-5	Vdet-IC	1.6V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L16L	-	82C16L-AE3-5	Vdet-IC	1.6V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L17	-	2SC3624-17	Si-npn	AF-Amp, Sw, 60V, 150mA, 200mW, 250MHz, B=1000..2000	SOT-23	16ta	-	3a	Nec
L17	-	2SC4181-17	Si-npn	AF, Sw, 60V, 150mA, 150mW, B=1000..2000, 250MHz	SOT-323	16ta	-	3a	Nec
L17	-	82C17-AE3-5	Vdet-IC	1.7V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L17G	-	82C17G-AE3-5	Vdet-IC	1.7V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L17L	-	82C17L-AE3-5	Vdet-IC	1.7V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L18	-	2SC3624-18	Si-npn	AF-Amp, Sw, 60V, 150mA, 200mW, 250MHz, B=160..3200	SOT-23	16ta	-	3a	Nec
L18	-	2SC4181-18	Si-npn	AF, Sw, 60V, 150mA, 150mW, B=1600..3200, 250MHz	SOT-323	16ta	-	3a	Nec
L18	-	82C18-AE3-5	Vdet-IC	1.8V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L18G	-	82C18G-AE3-5	Vdet-IC	1.8V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L18L	-	82C18L-AE3-5	Vdet-IC	1.8V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L19	-	82C19-AE3-5	Vdet-IC	1.9V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L19	-	SJ73L19S	Vdet-IC	1.9V±5%, -Reset OCO	SOT-23	16vda	VD6	3b	Kau
L19G	-	82C19G-AE3-5	Vdet-IC	1.9V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L19L	-	82C19L-AE3-5	Vdet-IC	1.9V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L2	-	AP8821N-32GC	Vdet-IC	3.2V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
L2	-	AP8821N-32GT	Vdet-IC	3.2V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
L2	-	AP8821N-32PC	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
L2	-	AP8821N-32PT	Vdet-IC	3.2V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
L2	-	BAS40-06LT1	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-23	16df	-	3a	Ons
L2	-	BAT54AT	Si-diode	Dual, SBD, 30V, 200mA, Vf<0.52V(100mA), <5ns	SOT-523	16df	-	3b	Di
L2	-	BSS69	Si-pnp	Sw, 40V, 100mA, 200MHz, <75/225ns, B>50	SOT-23	16ta	-	3a	Fer
L2	-	ELM7622LAB	Vdet-IC	2.2V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
L2	-	HSMP-3862	PIN-diode	Dual, RF, 50V, 1A(1ms), <0.2pF, <3Ω(100mA)	SOT-23	16dl	-	3a	Agi
L2	-	HSMP-386C	PIN-diode	Dual, RF, 50V, 1A, Rs(typ)=3Ω, 0.2pF	SOT-323	16dg	-	3a	Agi
L2	-	KTC4075-2	Si-npn	AF, 60V, 150mA, 100mW, B=70..140, >80MHz	SOT-323	16ta	-	3f	Kec
L2	-	R3111N322C	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
L2	-	R3130N26AC3	Vdet-IC	2.6V±1.5%, -Reset ODO, 50ms	SOT-23	16vdc	VD6	3b	Ric
L2	-	RN1103FS	Si-npn-Digi	Sw, 20V, 50mA, 50mW, R1/R2=22k/22k	fSM	19ta	-	3a	Tos
L2-	-	RT9819E-24PV	Vdet-IC	2.4V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Rct
L20	-	82C20-AE3-5	Vdet-IC	2.0V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L20	-	BAS29	Si-diode	GP, Contr, Avalanche, 90V, 250mA, 250mW, 35pF, <50ns	SOT-23	16dc	-	3a	Nsc
L20	-	KSK211	n-FET	VHF/FM, 18V, 200mW, Idss=1mA, Up<4V	SOT-23	16fk	-	3a	Sam
L20G	-	82C20G-AE3-5	Vdet-IC	2.0V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L20L	-	82C20L-AE3-5	Vdet-IC	2.0V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L21	-	82C21-AE3-5	Vdet-IC	2.1V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L21	-	BAS31	Si-diode	Dual, GP, Contr, Aval., 90V, 250mA, 250mW, 35pF, <50ns	SOT-23	16dl	-	3a	Nsc
L21	-	GS810C21EUA	Vdet-IC	2.1V±1.5%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
L21	-	SJ73L21S	Vdet-IC	2.1V±5%, -Reset OCO	SOT-23	16vda	VD6	3b	Kau
L21G	-	82C21G-AE3-5	Vdet-IC	2.1V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L21L	-	82C21L-AE3-5	Vdet-IC	2.1V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L22	-	82C22-AE3-5	Vdet-IC	2.2V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L22	-	BAS35	Si-diode	Dual, GP, Contr, Aval., 90V, 250mA, 250mW, 35pF, <50ns	SOT-23	16df	-	3a	Nsc
L22G	-	82C22G-AE3-5	Vdet-IC	2.2V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L22L	-	82C22L-AE3-5	Vdet-IC	2.2V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L23	-	82C23-AE3-5	Vdet-IC	2.3V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L23	-	SJ73L23S	Vdet-IC	2.3V±5%, -Reset OCO	SOT-23	16vda	VD6	3b	Kau
L23	-	XC61CN1202M	Vdet-IC	1.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
L23G	-	82C23G-AE3-5	Vdet-IC	2.3V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L23L	-	82C23L-AE3-5	Vdet-IC	2.3V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L24	-	82C24-AE3-5	Vdet-IC	2.4V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L24	-	DTD114GK	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R2=10k	SOT-346	16ta	-	3a	Rhm
L24	-	GS810C24EUA	Vdet-IC	2.4V±1.5%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
L24G	-	82C24G-AE3-5	Vdet-IC	2.4V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L24L	-	82C24L-AE3-5	Vdet-IC	2.4V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L25	-	82C25-AE3-5	Vdet-IC	2.5V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L25	-	SJ73L25S	Vdet-IC	2.5V±5%, -Reset OCO	SOT-23	16vda	VD6	3b	Kau
L25G	-	82C25G-AE3-5	Vdet-IC	2.5V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L25L	-	82C25L-AE3-5	Vdet-IC	2.5V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L26	-	82C26-AE3-5	Vdet-IC	2.6V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L26	-	GS810CREUA	Vdet-IC	2.63V±1.5%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
L26G	-	82C26G-AE3-5	Vdet-IC	2.6V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L26L	-	82C26L-AE3-5	Vdet-IC	2.6V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L27	-	82C27-AE3-5	Vdet-IC	2.7V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L27	-	GS810C27SEUA	Vdet-IC	2.7V±1.5%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
L27	-	SJ73L27S	Vdet-IC	2.7V±5%, -Reset OCO	SOT-23	16vda	VD6	3b	Kau
L27G	-	82C27G-AE3-5	Vdet-IC	2.7V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L27L	-	82C27L-AE3-5	Vdet-IC	2.7V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L28	-	82C28-AE3-5	Vdet-IC	2.8V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L28G	-	82C28G-AE3-5	Vdet-IC	2.8V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L28L	-	82C28L-AE3-5	Vdet-IC	2.8V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L29	-	82C29-AE3-5	Vdet-IC	2.9V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L29	-	GS810CSEUA	Vdet-IC	2.93V±1.5%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
L29	-	SJ73L29S	Vdet-IC	2.9V±5%, -Reset OCO	SOT-23	16vda	VD6	3b	Kau
L29G	-	82C29G-AE3-5	Vdet-IC	2.9V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L29L	-	82C29L-AE3-5	Vdet-IC	2.9V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L3	-	2SC1623-3	Si-npn	GP, 60V, 100mA, 200mW, 250MHz, B=60..120	SOT-23	16ta	-	3a	Nec
L3	-	AP8821N-33GC	Vdet-IC	3.3V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
L3	-	AP8821N-33GT	Vdet-IC	3.3V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
L3	-	AP8821N-33PC	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
L3	-	AP8821N-33PT	Vdet-IC	3.3V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
L3	-	BAT54CT	Si-diode	Dual, SBD, 30V, 200mA, Vf<0.52V(100mA), <5ns	SOT-523	16dg	-	3b	Di
L3	-	BFS37	Si-pnp	AF, LN, 45V, 0.5A, >30MHz	SOT-323	16te	-	3a	Fer
L3	-	BSS70	Si-pnp	Sw, 40V, 100mA, 330mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Zx
L3	-	ELM7623LAB	Vdet-IC	2.3V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
L3	-	HSMP-3863	PIN-diode	Dual, RF, 50V, 1A(1ms), <0.2pF, <3Ω(100mA)	SOT-23	16df	-	3a	Agi
L3	-	HSMP-386E	PIN-diode	Dual, RF, 50V, 1A, Rs(typ)=3Ω, 0.2pF	SOT-323	16df	-	3a	Agi
L3	-	KST1623-L3	Si-npn	GP, 50V, 100mA, 350mW, B=60..120, >200MHz	SOT-23	16ta	-	3a	Sam
L3	-	MMBC1623L3	Si-npn	GP, AF, 50V, 100mA, 350mW, B=60..120, >200MHz	SOT-23	16ta	-	3a	Sam
L3	-	R3111N332C	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
L3	-	R3130N29AC3	Vdet-IC	2.9V±1.5%, -Reset ODO, 50ms	SOT-23	16vdc	VD6	3b	Ric
L3	-	RN1104FS	Si-npn-Digi	Sw, 20V, 50mA, 50mW, R1/R2=47k/47k	fSM	19ta	-	3a	Tos
L3	-	RT9819E-25PV	Vdet-IC	2.5V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Rct
L30	-	82C30-AE3-5	Vdet-IC	3.0V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L30	-	FA1L4L	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/22k	SC-59	16ta	-	3a	Nec
L30	-	GA1L4L	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/22k	SOT-323	16ta	-	3a	Nec
L30	-	GS810CTEUA	Vdet-IC	3.08V±1.5%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
L30G	-	82C30G-AE3-5	Vdet-IC	3.0V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L30L	-	82C30L-AE3-5	Vdet-IC	3.0V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L31	-	82C31-AE3-5	Vdet-IC	3.1V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L31	-	BAV23S	Si-diode	Dual, GP, 200V, 225mA, Vs<1.25V(200mA), <50ns	SOT-23	16dl	-	3a	Phi
L31	-	FA1L4M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/47k	SC-59	16ta	-	3a	Nec
L31	-	GA1L4M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/47k	SOT-323	16ta	-	3a	Nec
L31	-	SJ73L31S	Vdet-IC	3.1V±5%, -Reset OCO	SOT-23	16vda	VD6	3b	Kau
L31G	-	82C31G-AE3-5	Vdet-IC	3.1V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L31L	-	82C31L-AE3-5	Vdet-IC	3.1V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L32	-	82C32-AE3-5	Vdet-IC	3.2V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L32	-	FA1F4M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/22k	SC-59	16ta	-	3a	Nec
L32	-	GA1F4M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/22k	SOT-323	16ta	-	3a	Nec
L32	-	SJ73L32S	Vdet-IC	3.2V±5%, -Reset OCO	SOT-23	16vda	VD6	3b	Kau
L32G	-	82C32G-AE3-5	Vdet-IC	3.2V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L32L	-	82C32L-AE3-5	Vdet-IC	3.2V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L33	-	82C33-AE3-5	Vdet-IC	3.3V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L33	-	FA1A4M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/10k	SC-59	16ta	-	3a	Nec
L33	-	GA1A4M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/10k	SOT-323	16ta	-	3a	Nec
L33	-	SJ73L33S	Vdet-IC	3.3V±5%, -Reset OCO	SOT-23	16vda	VD6	3b	Kau
L33	-	XC61CN1302M	Vdet-IC	1.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
L33G	-	82C33G-AE3-5	Vdet-IC	3.3V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L33L	-	82C33L-AE3-5	Vdet-IC	3.3V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L34	-	82C34-AE3-5	Vdet-IC	3.4V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L34	-	FA1A4P	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/47k	SC-59	16ta	-	3a	Nec
L34	-	GA1A4P	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/47k	SOT-323	16ta	-	3a	Nec
L34	-	SJ73L34S	Vdet-IC	3.4V±5%, -Reset OCO	SOT-23	16vda	VD6	3b	Kau
L34G	-	82C34G-AE3-5	Vdet-IC	3.4V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L34L	-	82C34L-AE3-5	Vdet-IC	3.4V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L35	-	82C35-AE3-5	Vdet-IC	3.5V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L35	-	FA1F4N	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/47k	SC-59	16ta	-	3a	Nec
L35	-	GA1F4N	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/47k	SOT-323	16ta	-	3a	Nec
L35	-	SJ73L35S	Vdet-IC	3.5V±5%, -Reset OCO	SOT-23	16vda	VD6	3b	Kau
L35G	-	82C35G-AE3-5	Vdet-IC	3.5V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L35L	-	82C35L-AE3-5	Vdet-IC	3.5V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L36	-	82C36-AE3-5	Vdet-IC	3.6V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L36	-	FA1L3Z-K	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=4k7, B=135..270	SC-59	16ta	-	3a	Nec
L36	-	GA1L3Z-O	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=4k7, B=200..400	SOT-323	16ta	-	3a	Nec
L36	-	SJ73L36S	Vdet-IC	3.6V±5%, -Reset OCO	SOT-23	16vda	VD6	3b	Kau
L36G	-	82C36G-AE3-5	Vdet-IC	3.6V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L36L	-	82C36L-AE3-5	Vdet-IC	3.6V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L37	-	82C37-AE3-5	Vdet-IC	3.7V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L37	-	FA1L3Z-P	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=4k7, B=200..400	SC-59	16ta	-	3a	Nec
L37	-	GA1L3Z-P	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=4k7, B=135..270	SOT-323	16ta	-	3a	Nec
L37G	-	82C37G-AE3-5	Vdet-IC	3.7V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L37L	-	82C37L-AE3-5	Vdet-IC	3.7V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L38	-	82C38-AE3-5	Vdet-IC	3.8V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L38	-	FA1L3Z-Q	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=4k7, B=300..600	SC-59	16ta	-	3a	Nec
L38	-	GA1L3Z-K	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=4k7, B=135..270	SOT-323	16ta	-	3a	Nec
L38G	-	82C38G-AE3-5	Vdet-IC	3.8V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L38L	-	82C38L-AE3-5	Vdet-IC	3.8V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L39	-	82C39-AE3-5	Vdet-IC	3.9V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L39	-	SJ73L39S	Vdet-IC	3.9V±5%, -Reset OCO	SOT-23	16vda	VD6	3b	Kau
L39G	-	82C39G-AE3-5	Vdet-IC	3.9V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L39L	-	82C39L-AE3-5	Vdet-IC	3.9V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L4	-	2SC1623-4	Si-npn	GP, 60V, 100mA, 200mW, 250MHz, B=90..180	SOT-23	16ta	-	3a	Nec
L4	-	2SC1623A-4	Si-npn	GP, 60V, 100mA, 200mW, 250MHz, B=90..180	SOT-23	16ta	-	3a	Nec
L4	-	2SC2812-4	Si-npn	GP, AF, 55V, 150mA, 200mW, B=90..180, 100MHz	CPA	16ta	-	3a	San
L4	-	2SC4177-4	Si-npn	AF, 60V, 100mA, 150mW, B=90..180, 250MHz	SOT-323	16ta	-	3a	Nec
L4	-	2SC4783-4	Si-npn	Hi-beta, 60V, 200mA, 200mW, 250MHz, B=90..180	SOT-416	16ta	-	3a	Nec
L4	-	AP8821N-34GC	Vdet-IC	3.4V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
L4	-	AP8821N-34GT	Vdet-IC	3.4V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
L4	-	AP8821N-34PC	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
L4	-	AP8821N-34PT	Vdet-IC	3.4V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
L4	-	BAT54	Si-diode	SBR, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dc	-	3g	Vs
L4	-	BAT54ST	Si-diode	Dual, SBD, 30V, 200mA, Vf<0.52V(100mA), <5ns	SOT-523	16dl	-	3b	Di
L4	-	BAT54W	Si-diode	SBR, 30V, 200mA, Vf<0.52V(100mA), <5ns	SOT-323	16dc	-	3a	Phi
L4	-	ELM7624LAB	Vdet-IC	2.4V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
L4	-	HSMP-3864	PIN-diode	Dual, RF, 50V, 1A(1ms), <0.2pF, <3Ω(100mA)	SOT-23	16dg	-	3a	Agi
L4	-	HSMP-386F	PIN-diode	Dual, RF, 50V, 1A, Rs(typ)=3Ω, 0.2pF	SOT-323	16dg	-	3a	Agi
L4	-	KST1623-L4	Si-npn	GP, 50V, 100mA, 350mW, B=90..180, >200MHz	SOT-23	16ta	-	3a	Sam
L4	-	KTC4075-4	Si-npn	AF, 60V, 150mA, 100mW, B=120..240, >80MHz	SOT-323	16ta	-	3f	Kec
L4	-	MMBC1623L4	Si-npn	GP, AF, 50V, 100mA, 350mW, B=100..200, >200MHz	SOT-23	16ta	-	3a	Sam
L4	-	R3111N342C	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
L4	-	R3130N30AC8	Vdet-IC	3V±1.5%, -Reset ODO, 50ms	SOT-23	16vdc	VD6	3b	Ric
L4	-	RN1105FS	Si-npn-Digi	Sw, 20V, 50mA, 50mW, R1/R2=2.2k/47k	fSM	19ta	-	3a	Tos
L4	-	RT9819E-26PV	Vdet-IC	2.6V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Rct
L4	-	TC54VN1402ECB	Vdet-IC	1.4V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
L40	-	82C40-AE3-5	Vdet-IC	4.0V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L40	-	GS810CJEUA	Vdet-IC	4.0V±1.5%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
L40G	-	82C40G-AE3-5	Vdet-IC	4.0V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L40L	-	82C40L-AE3-5	Vdet-IC	4.0V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L41	-	82C41-AE3-5	Vdet-IC	4.1V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L41G	-	82C41G-AE3-5	Vdet-IC	4.1V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L41L	-	82C41L-AE3-5	Vdet-IC	4.1V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L42	-	82C42-AE3-5	Vdet-IC	4.2V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L42	-	BAT54A	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16df	-	3a	Nsc
L42	-	SJ73L42S	Vdet-IC	4.2V±5%, -Reset OCO	SOT-23	16vda	VD6	3b	Kau
L42G	-	82C42G-AE3-5	Vdet-IC	4.2V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L42L	-	82C42L-AE3-5	Vdet-IC	4.2V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L43	-	82C43-AE3-5	Vdet-IC	4.3V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L43	-	BAT54B	Si-diode	Dual, Schottky, 30V, 200mA, Vf(If=100mA)<1V, 10pF, <5ns	SOT-23	16dg	-	3g	Vs
L43	-	BAT54C	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dg	-	3a	Nsc
L43	-	GS810CMEUA	Vdet-IC	4.38V±1.5%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
L43	-	XC61CN1402M	Vdet-IC	1.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
L43G	-	82C43G-AE3-5	Vdet-IC	4.3V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L43L	-	82C43L-AE3-5	Vdet-IC	4.3V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L44	-	82C44-AE3-5	Vdet-IC	4.4V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L44	-	BAT54S	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dl	-	3a	Nsc
L44G	-	82C44G-AE3-5	Vdet-IC	4.4V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L44L	-	82C44L-AE3-5	Vdet-IC	4.4V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L45	-	82C45-AE3-5	Vdet-IC	4.5V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L45	-	SJ73L45S	Vdet-IC	4.5V±5%, -Reset OCO	SOT-23	16vda	VD6	3b	Kau
L45G	-	82C45G-AE3-5	Vdet-IC	4.5V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L45L	-	82C45L-AE3-5	Vdet-IC	4.5V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L46	-	82C46-AE3-5	Vdet-IC	4.6V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L46	-	GS810CLEUA	Vdet-IC	4.63V±1.5%, +Reset PPO, 1.5ms	SOT-23	16vdc	VD7	3g	Vs
L46G	-	82C46G-AE3-5	Vdet-IC	4.6V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L46L	-	82C46L-AE3-5	Vdet-IC	4.6V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L47	-	82C47-AE3-5	Vdet-IC	4.7V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L47G	-	82C47G-AE3-5	Vdet-IC	4.7V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L47L	-	82C47L-AE3-5	Vdet-IC	4.7V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L48	-	82C48-AE3-5	Vdet-IC	4.8V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L48G	-	82C48G-AE3-5	Vdet-IC	4.8V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L48L	-	82C48L-AE3-5	Vdet-IC	4.8V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L49	-	82C49-AE3-5	Vdet-IC	4.9V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L49G	-	82C49G-AE3-5	Vdet-IC	4.9V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L49L	-	82C49L-AE3-5	Vdet-IC	4.9V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L4p	-	BAT54	Si-diode	SBR, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dc	-	3a	PhH
L4t	-	BAT54	Si-diode	SBR, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dc	-	3a	PhM
L4w	-	BAT54	Si-diode	SBR, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dc	-	3a	PhC
L4Z	-	BAT54	Si-diode	SBR, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dc	-	3a	Zx
L5	-	2SC1623-5	Si-npn	GP, 60V, 100mA, 200mW, 250MHz, B=135..270	SOT-23	16ta	-	3a	Nec
L5	-	2SC1623A-5	Si-npn	GP, 60V, 100mA, 200mW, 250MHz, B=135..270	SOT-23	16ta	-	3a	Nec
L5	-	2SC2812-5	Si-npn	GP, AF, 55V, 150mA, 200mW, B=135..270, 100MHz	CPA	16ta	-	3a	San
L5	-	2SC4177-5	Si-npn	AF, 60V, 100mA, 150mW, B=135..270, 250MHz	SOT-323	16ta	-	3a	Nec
L5	-	2SC4211-5	Si-npn	GP, 55V, 150mA, 150mW, 200MHz, B=135..270	MCP	16ta	-	3a	San
L5	-	2SC4783-5	Si-npn	Hi-beta, 60V, 200mA, 200mW, 250MHz, B=135..270	SOT-416	16ta	-	3a	Nec
L5	-	AP8821N-35GC	Vdet-IC	3.5V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
L5	-	AP8821N-35GT	Vdet-IC	3.5V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
L5	-	AP8821N-35PC	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
L5	-	AP8821N-35PT	Vdet-IC	3.5V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
L5	-	BFT27	Si-npn	AF, 60V, 0.5A, >30MHz	SOT-323	16te	-	3a	Fer
L5	-	BSS65R	Si-pnp	Sw, 12V, 100mA, 330mW, B=40..150, >400MHz	SOT-23	16te	-	3a	Zx
L5	-	ELM7625LAB	Vdet-IC	2.5V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
L5	-	KST1623-L5	Si-npn	GP, 50V, 100mA, 350mW, B=135..270, >200MHz	SOT-23	16ta	-	3a	Sam
L5	-	MMBC1623L5	Si-npn	GP, AF, 50V, 100mA, 350mW, B=135..270, >200MHz	SOT-23	16ta	-	3a	Sam
L5	-	R3111N352C	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
L5	-	R3130N46AC5	Vdet-IC	4.6V±1.5%, -Reset ODO, 50ms	SOT-23	16vdc	VD6	3b	Ric
L5	-	RN1106FS	Si-npn-Digi	Sw, 20V, 50mA, 50mW, R1/R2=4.7k/47k	fSM	19ta	-	3a	Tos
L5	-	TC54VN1502ECB	Vdet-IC	1.5V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
L5-	-	RT9818B-31PV	Vdet-IC	3.1V±1.5%, -Reset ODO, Td=55ms	SOT-23	16vda	VD6	3a	Rct
L50	-	82C50-AE3-5	Vdet-IC	5.0V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L50G	-	82C50G-AE3-5	Vdet-IC	5.0V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L50L	-	82C50L-AE3-5	Vdet-IC	5.0V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L51	-	82C51-AE3-5	Vdet-IC	5.1V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L51G	-	82C51G-AE3-5	Vdet-IC	5.1V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L51L	-	82C51L-AE3-5	Vdet-IC	5.1V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L52	-	82C52-AE3-5	Vdet-IC	5.2V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L52	-	BAS678	Si-diode	Sw, Fast, 80V, 250mA, Vf<1V(100mA), <6ns	SOT-23	16dc	-	3a	Phi
L52G	-	82C52G-AE3-5	Vdet-IC	5.2V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L52L	-	82C52L-AE3-5	Vdet-IC	5.2V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L53	-	82C53-AE3-5	Vdet-IC	5.3V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L53	-	XC61CN1502M	Vdet-IC	1.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
L53G	-	82C53G-AE3-5	Vdet-IC	5.3V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L53L	-	82C53L-AE3-5	Vdet-IC	5.3V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L54	-	82C54-AE3-5	Vdet-IC	5.4V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L54G	-	82C54G-AE3-5	Vdet-IC	5.4V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L54L	-	82C54L-AE3-5	Vdet-IC	5.4V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L55	-	82C55-AE3-5	Vdet-IC	5.5V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L55G	-	82C55G-AE3-5	Vdet-IC	5.5V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L55L	-	82C55L-AE3-5	Vdet-IC	5.5V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L56	-	82C56-AE3-5	Vdet-IC	5.6V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L56G	-	82C56G-AE3-5	Vdet-IC	5.6V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L56L	-	82C56L-AE3-5	Vdet-IC	5.6V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L57	-	82C57-AE3-5	Vdet-IC	5.7V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L57G	-	82C57G-AE3-5	Vdet-IC	5.7V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L57L	-	82C57L-AE3-5	Vdet-IC	5.7V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L58	-	82C58-AE3-5	Vdet-IC	5.8V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L58G	-	82C58G-AE3-5	Vdet-IC	5.8V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L58L	-	82C58L-AE3-5	Vdet-IC	5.8V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L59	-	82C59-AE3-5	Vdet-IC	5.9V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L59G	-	82C59G-AE3-5	Vdet-IC	5.9V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L59L	-	82C59L-AE3-5	Vdet-IC	5.9V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L5p	-	BAS55	Si-diode	Sw, U-Fast, 60V, 250mA, Vf<1V(200mA), <6ns	SOT-23	16dc	-	3a	Phi
L6	-	2SC1623-6	Si-npn	GP, 60V, 100mA, 200mW, 250MHz, B=200..400	SOT-23	16ta	-	3a	Nec
L6	-	2SC1623A-6	Si-npn	GP, 60V, 100mA, 200mW, 250MHz, B=200..400	SOT-23	16ta	-	3a	Nec
L6	-	2SC2812-6	Si-npn	GP, AF, 55V, 150mA, 200mW, B=150..300, 100MHz	CPA	16ta	-	3a	San
L6	-	2SC4177-6	Si-npn	AF, 60V, 100mA, 150mW, B=200..400, 250MHz	SOT-323	16ta	-	3a	Nec
L6	-	2SC4211-6	Si-npn	GP, 55V, 150mA, 150mW, 200MHz, B=200..400	MCP	16ta	-	3a	San
L6	-	2SC4783-6	Si-npn	Hi-beta, 60V, 200mA, 200mW, 250MHz, B=200..400	SOT-416	16ta	-	3a	Nec
L6	-	AP8821N-36GC	Vdet-IC	3.6V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
L6	-	AP8821N-36GT	Vdet-IC	3.6V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
L6	-	AP8821N-36PC	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
L6	-	AP8821N-36PT	Vdet-IC	3.6V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L6	-	BAR17	PIN-diode	RF, 100V, 140mA, Vf(If=100mA)<1V, Ir<0.05µA, Cd<0.37pF	SOT-23	16dc	-	3a	Sie
L6	-	BSS47	Si-npn	Nix, 120V, 100mA	SOT-323	16te	-	3a	Fer
L6	-	BSS69R	Si-pnp	Sw, 40V, 100mA, 200MHz, <75/225ns, B>50	SOT-23	16te	-	3a	Zx
L6	-	ELM7626LAB	Vdet-IC	2.6V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
L6	-	KST1623-L6	Si-npn	GP, 50V, 100mA, 350mW, B=200..400, >200MHz	SOT-23	16ta	-	3a	Sam
L6	-	KTC4075-6	Si-npn	AF, 60V, 150mA, 100mW, B=200..400, >80MHz	SOT-323	16ta	-	3f	Kec
L6	-	MMBC1623L6	Si-npn	GP, AF, 50V, 100mA, 350mW, B=200..400, >200MHz	SOT-23	16ta	-	3a	Sam
L6	-	R3111N362C	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
L6	-	R3130N27AC	Vdet-IC	2.7V±1.5%, -Reset ODO, 50ms	SOT-23	16vdc	VD6	3b	Ric
L6	-	RN1107FS	Si-npn-Digi	Sw, 20V, 50mA, 50mW, R1/R2=10k/47k	fSM	19ta	-	3a	Tos
L6	-	TC54VN1602ECB	Vdet-IC	1.6V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
L6-	-	RT9818B-30PVL	Vdet-IC	3.0V±1.5%, -Reset ODO, Td=55ms	SOT-23	16vda	VD6	3a	Rct
L60	-	82C60-AE3-5	Vdet-IC	6.0V±2% -Reset PPO	SOT-23	16vdb	VD7	3a	Utc
L60G	-	82C60G-AE3-5	Vdet-IC	6.0V±2% -Reset PPO, halogen free	SOT-23	16vdb	VD7	3a	Utc
L60L	-	82C60L-AE3-5	Vdet-IC	6.0V±2% -Reset PPO, lead free	SOT-23	16vdb	VD7	3a	Utc
L61	-	FA1L4Z-K	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=47k, B=135..270	SC-59	16ta	-	3a	Nec
L61	-	GA1L4Z-Q	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=4k7, B=300..600	SOT-323	16ta	-	3a	Nec
L62	-	FA1L4Z-P	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=47k, B=200..400	SC-59	16ta	-	3a	Nec
L62	-	GA1L4Z-P	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=4k7, B=200..400	SOT-323	16ta	-	3a	Nec
L63	-	FA1L4Z-Q	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=47k, B=300..600	SC-59	16ta	-	3a	Nec
L63	-	GA1L4Z-K	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=47k, B=135..270	SOT-323	16ta	-	3a	Nec
L63	-	XC61CN1602M	Vdet-IC	1.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
L63	-	XE61CN1645MR	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
L64	-	FA1F4Z-K	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=22k, B=135..270	SC-59	16ta	-	3a	Nec
L64	-	GA1F4Z-Q	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=22k, B=300..600	SOT-323	16ta	-	3a	Nec
L65	-	FA1F4Z-P	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=22k, B=200..400	SC-59	16ta	-	3a	Nec
L65	-	GA1F4Z-P	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=22k, B=200..400	SOT-323	16ta	-	3a	Nec
L65	-	LN61FN1612M	Vdet-IC	1.6V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
L65	-	TC51N1602ECB	Vdet-IC	1.6V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
L65	-	XC61FN1612M	Vdet-IC	1.6V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
L65	-	XC61HN1612MR	Vdet-IC	1.6V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
L66	-	FA1F4Z-Q	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=22k, B=300..600	SC-59	16ta	-	3a	Nec
L66	-	GA1F4Z-K	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=22k, B=135..270	SOT-323	16ta	-	3a	Nec
L66	-	LN61FN1642M	Vdet-IC	1.6V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
L66	-	XC61FN1642M	Vdet-IC	1.6V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
L66	-	XC61HN1642MR	Vdet-IC	1.6V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
L67	-	FA1A4Z-K	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=10k, B=135..270	SC-59	16ta	-	3a	Nec
L67	-	GA1A4Z-Q	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=10k, B=300..600	SOT-323	16ta	-	3a	Nec
L67	-	LN61FN1652M	Vdet-IC	1.6V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
L67	-	XC61FN1652M	Vdet-IC	1.6V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
L67	-	XC61HN1652MR	Vdet-IC	1.6V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
L68	-	FA1A4Z-P	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=10k, B=200..400	SC-59	16ta	-	3a	Nec
L68	-	GA1A4Z-P	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=10k, B=200..400	SOT-323	16ta	-	3a	Nec
L69	-	FA1A4Z-Q	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=10k, B=300..600	SC-59	16ta	-	3a	Nec
L69	-	GA1A4Z-K	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=10k, B=135..270	SOT-323	16ta	-	3a	Nec
L6p	-	BAT720	Si-diode	Schottky, Sw, U-Fast, 40V, 500mA, Vf<0.55V(0.5A), <0.3ns	SOT-23	16dc	-	3a	PhH
L6t	-	BAT720	Si-diode	Schottky, Sw, U-Fast, 40V, 500mA, Vf<0.55V(0.5A), <0.3ns	SOT-23	16dc	-	3a	PhM
L6W	-	BAT720	Si-diode	Schottky, Sw, U-Fast, 40V, 500mA, Vf<0.55V(0.5A), <0.3ns	SOT-23	16dc	-	3a	PhC
L7	-	2SC1623-7	Si-npn	GP, 60V, 100mA, 200mW, 250MHz, B=300..600	SOT-23	16ta	-	3a	Nec
L7	-	2SC1623A-7	Si-npn	GP, 60V, 100mA, 200mW, 250MHz, B=300..600	SOT-23	16ta	-	3a	Nec
L7	-	2SC2812-7	Si-npn	GP, AF, 55V, 150mA, 200mW, B=175..350, 100MHz	CPA	16ta	-	3a	San
L7	-	2SC4177-7	Si-npn	AF, 60V, 100mA, 150mW, B=300..600, 250MHz	SOT-323	16ta	-	3a	Nec
L7	-	2SC4211-7	Si-npn	GP, 55V, 150mA, 150mW, 200MHz, B=300..600	MCP	16ta	-	3a	San
L7	-	2SC4783-7	Si-npn	Hi-beta, 60V, 200mA, 200mW, 250MHz, B=300..600	SOT-416	16ta	-	3a	Nec
L7	-	AP8821N-37GC	Vdet-IC	3.7V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
L7	-	AP8821N-37GT	Vdet-IC	3.7V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
L7	-	AP8821N-37PC	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
L7	-	AP8821N-37PT	Vdet-IC	3.7V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
L7	-	BAT721	Si-diode	Schottky, Sw, U-Fast, 40V, 200mA, Vf<0.55V(0.2A), <0.3ns	SOT-23	16dc	-	3a	PhH
L7	-	BSS56	Si-npn	Sw, Driver, 100V, 500mA, >80MHz	SOT-323	16te	-	3a	Fer
L7	-	BSS70R	Si-pnp	Sw, 40V, 100mA, 330mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Zx
L7	-	ELM7627LAB	Vdet-IC	2.7V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
L7	-	KST1623-L7	Si-npn	GP, 50V, 100mA, 350mW, B=300..600, >200MHz	SOT-23	16ta	-	3a	Sam
L7	-	MMBC1623L7	Si-npn	GP, AF, 50V, 100mA, 350mW, B=300..600, >200MHz	SOT-23	16ta	-	3a	Sam
L7	-	R3111N372C	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
L7	-	RN1108FS	Si-npn-Digi	Sw, 20V, 50mA, 50mW, R1/R2=22k/47k	fSM	19ta	-	3a	Tos
L7	-	TC54VN1702ECB	Vdet-IC	1.7V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
L7-	-	RT9818E-12PV	Vdet-IC	1.2V±1.5%, +Reset ODO	SOT-23	16vdc	VD6	3a	Rct
L73	-	XC61CN1702M	Vdet-IC	1.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
L73	-	XE61CN1745MR	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L75	-	LN61FN1712M	Vdet-IC	1.7V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
L75	-	TC51N1702ECB	Vdet-IC	1.7V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
L75	-	XC61FN1712M	Vdet-IC	1.7V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
L75	-	XC61HN1712MR	Vdet-IC	1.7V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
L76	-	LN61FN1742M	Vdet-IC	1.7V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
L76	-	XC61FN1742M	Vdet-IC	1.7V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
L76	-	XC61HN1742MR	Vdet-IC	1.7V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
L77	-	LN61FN1752M	Vdet-IC	1.7V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
L77	-	XC61FN1752M	Vdet-IC	1.7V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
L77	-	XC61HN1752MR	Vdet-IC	1.7V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
L7p	-	BAT721	Si-diode	Schottky, Sw, U-Fast, 40V, 200mA, Vf<0.55V(0.2A), <0.3ns	SOT-23	16dc	-	3a	PhH
L7s	-	BAR14-1	PIN-diode	Dual, RF, 100V, 140mA, 250mW, Vf<1.25V (100mA), <0.5pF	SOT-23	16dl	-	3c	Inf
L7t	-	BAT721	Si-diode	Schottky, Sw, U-Fast, 40V, 200mA, Vf<0.55V(0.2A), <0.3ns	SOT-23	16dc	-	3a	PhM
L7W	-	BAT721	Si-diode	Schottky, Sw, U-Fast, 40V, 200mA, Vf<0.55V(0.2A), <0.3ns	SOT-23	16dc	-	3a	PhC
L8	-	AP8821N-38GC	Vdet-IC	3.8V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
L8	-	AP8821N-38GT	Vdet-IC	3.8V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
L8	-	AP8821N-38PC	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
L8	-	AP8821N-38PT	Vdet-IC	3.8V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
L8	-	BAT721A	Si-diode	Dual, Schottky, Sw, U-Fst, 40V, 0.2A, Vf<0.55V(0.2A), <0.3ns	SOT-23	16df	-	3a	PhH
L8	-	ELM7628LAB	Vdet-IC	2.8V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
L8	-	KTC4075-8	Si-npn	AF, 60V, 150mA, 100mW, B=350..700, >80MHz	SOT-323	16ta	-	3f	Kec
L8	-	R3111N382C	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
L8	-	RN1109FS	Si-npn-Digi	Sw, 20V, 50mA, 50mW, R1/R2=47k/22k	fSM	19ta	-	3a	Tos
L8	-	TC54VN1802ECB	Vdet-IC	1.8V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
L81	-	FA1L3M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/4k7	SC-59	16ta	-	3a	Nec
L81	-	GA1L3M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/4k7	SOT-323	16ta	-	3a	Nec
L82	-	FA1L3N	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/10k	SC-59	16ta	-	3a	Nec
L82	-	GA1L3N	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/10k	SOT-323	16ta	-	3a	Nec
L83	-	FA1A3Q	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=1k/10k	SC-59	16ta	-	3a	Nec
L83	-	GA1A3Q	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=1k/10k	SOT-323	16ta	-	3a	Nec
L83	-	XC61CN1802M	Vdet-IC	1.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
L83	-	XE61CN1845MR	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
L85	-	LN61FN1812M	Vdet-IC	1.8V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
L85	-	TC51N1802ECB	Vdet-IC	1.8V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
L85	-	XC61FN1812M	Vdet-IC	1.8V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
L85	-	XC61HN1812MR	Vdet-IC	1.8V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
L86	-	LN61FN1842M	Vdet-IC	1.8V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
L86	-	XC61FN1842M	Vdet-IC	1.8V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
L86	-	XC61HN1842MR	Vdet-IC	1.8V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
L87	-	LN61FN1852M	Vdet-IC	1.8V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
L87	-	XC61FN1852M	Vdet-IC	1.8V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
L87	-	XC61HN1852MR	Vdet-IC	1.8V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
L8p	-	BAT721A	Si-diode	Dual, Schottky, Sw, U-Fst, 40V, 0.2A, Vf<0.55V(0.2A), <0.3ns	SOT-23	16df	-	3a	PhH
L8s	-	BAR15-1	PIN-diode	Dual, RF, 100V, 140mA, 250mW, Vf<1.25V (100mA), <0.5pF	SOT-23	16dg	-	3c	Inf
L8t	-	BAT721A	Si-diode	Dual, Schottky, Sw, U-Fst, 40V, 0.2A, Vf<0.55V(0.2A), <0.3ns	SOT-23	16df	-	3a	PhM
L8W	-	BAT721A	Si-diode	Dual, Schottky, Sw, U-Fst, 40V, 0.2A, Vf<0.55V(0.2A), <0.3ns	SOT-23	16df	-	3a	PhC
L9	-	1SS349	Si-diode	Dual, Schottky, 2x20V, 1.0A	SC-59	16dc	-	3a	Tos
L9	-	AP8821N-39GC	Vdet-IC	3.9V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
L9	-	AP8821N-39GT	Vdet-IC	3.9V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
L9	-	AP8821N-39PC	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
L9	-	AP8821N-39PT	Vdet-IC	3.9V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
L9	-	BAT721C	Si-diode	Dual, Schottky, Sw, U-Fst, 40V, 0.2A, Vf<0.55V(0.2A), <0.3ns	SOT-23	16dg	-	3a	PhH
L9	-	ELM7629LAB	Vdet-IC	2.9V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
L9	-	R1100D091C	LVR-IC	µ-low Icc, 0.9V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
L9	-	R3111N392C	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
L9	-	RN1110FS	Si-npn-Digi	Sw, 20V, 50mA, 50mW, R1=4.7k	fSM	19ta	-	3a	Tos
L9	-	TC54VN1902ECB	Vdet-IC	1.9V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
L93	-	XC61CN1902M	Vdet-IC	1.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
L93	-	XE61CN1945MR	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
L95	-	LN61FN1912M	Vdet-IC	1.9V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
L95	-	TC51N1902ECB	Vdet-IC	1.9V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
L95	-	XC61FN1912M	Vdet-IC	1.9V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
L95	-	XC61HN1912MR	Vdet-IC	1.9V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
L96	-	LN61FN1942M	Vdet-IC	1.9V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
L96	-	XC61FN1942M	Vdet-IC	1.9V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
L96	-	XC61HN1942MR	Vdet-IC	1.9V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
L97	-	LN61FN1952M	Vdet-IC	1.9V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
L97	-	XC61FN1952M	Vdet-IC	1.9V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
L97	-	XC61HN1952MR	Vdet-IC	1.9V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
L9p	-	BAT721C	Si-diode	Dual, Schottky, Sw, U-Fst, 40V, 0.2A, Vf<0.55V(0.2A), <0.3ns	SOT-23	16dg	-	3a	PhH



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L9s	-	BAR16-1	PIN-diode	Dual, RF, 100V, 140mA, 250mW, Vf<1.25V (100mA), <0.5pF	SOT-23	16df	-	3c	Inf
L9t	-	BAT721C	Si-diode	Dual, Schottky, Sw, U-Fst, 40V, 0.2A, Vf<0.55V(0.2A), <0.3ns	SOT-23	16dg	-	3a	PhM
L9W	-	BAT721C	Si-diode	Dual, Schottky, Sw, U-Fst, 40V, 0.2A, Vf<0.55V(0.2A), <0.3ns	SOT-23	16dg	-	3a	PhC
la	-	PT7M6229CHC3	Vdet-IC	2.9V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
la	-	PT7M6229CHTA3	Vdet-IC	2.9V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
la	cf	PT7M6229CHC3E	Vdet-IC	2.9V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
la	cf	PT7M6229CHTA3E	Vdet-IC	2.9V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
La	-	AX6601-33R	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23L	16cg	VR1	3b	Axl
LA	-	BF550	Si-pnp	HF/AF, 40V, 25mA, 200mW, B=50..125, 350MHz	SOT-23	16ta	-	3a	Sil
LA	-	ELM7630HDB	Vdet-IC	3.0V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
LA	-	RN1442A	Si-npn-Digi	Mute, 50V, 300mA, 300mW, R1=10k, B=200..700	SOT-346	16ta	-	3a	Tos
LA	-	Si1303DL	p-MOSFET	V-MOS, LogL, 20V, ±0.67A, <0.7Ω	SOT-323	16fh	-	3a	Six
LAA	-	BC807-16	Si-pnp	GP, 50V, 800mA, 200mW, B=110..250, 100MHz	SOT-23	16ta	-	3a	Auk
LAA	-	BC807F-16	Si-pnp	GP, 50V, 800mA, 200mW, B=110..250, 100MHz	SOT-23F	18ta	-	3a	Auk
LAB	-	BC807-25	Si-pnp	GP, 50V, 800mA, 200mW, B=160..400, 100MHz	SOT-23	16ta	-	3a	Auk
LAB	-	BC807F-25	Si-pnp	GP, 50V, 800mA, 200mW, B=160..400, 100MHz	SOT-23F	18ta	-	3a	Auk
LAC	-	BC807-40	Si-pnp	GP, 50V, 800mA, 200mW, B=250..630, 100MHz	SOT-23	16ta	-	3a	Auk
LAC	-	BC807F-40	Si-pnp	GP, 50V, 800mA, 200mW, B=250..630, 100MHz	SOT-23F	18ta	-	3a	Auk
LAp	-	BF550	Si-pnp	HF/AF, 40V, 25mA, 200mW, B=50..125, 350MHz	SOT-23	16ta	-	3a	PhH
LAs	-	BF550	Si-pnp	HF/AF, 40V, 25mA, 200mW, B=50..125, 350MHz	SOT-23	16ta	-	3a	Sie
LAs	-	BSR202N	n-MOSFET	LogL, 20V, 3.8A, 500mW, Rds=17mΩ(3.8A), 8.8/9ns	SC-59	16fh	-	3c	Inf
LAt	-	BF550	Si-pnp	HF/AF, 40V, 25mA, 200mW, B=50..125, 350MHz	SOT-23	16ta	-	3a	PhM
LAW	-	BF550	Si-pnp	HF/AF, 40V, 25mA, 200mW, B=50..125, 350MHz	SOT-23	16ta	-	3a	PhC
lb	-	PT7M6229NLC3	Vdet-IC	2.9V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
lb	-	PT7M6229NLTA3	Vdet-IC	2.9V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
lb	cf	PT7M6229NLC3E	Vdet-IC	2.9V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
lb	cf	PT7M6229NLTA3E	Vdet-IC	2.9V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
LB	-	2SC2462-B	Si-npn	AF, 50V, 100mA, 150mW, B=100..200	SOT-23	16ta	-	3a	Ren
LB	-	2SC5850-B	Si-npn	GP, AF, 50V, 100mA, 150mW, >100MHz, B=100..200	SOT-23	16ta	-	3a	Ren
LB	-	ELM7631HDB	Vdet-IC	3.1V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
LB	-	RN1442B	Si-npn-Digi	Mute, 50V, 300mA, 300mW, R1=10k, B=350..1200	SOT-346	16ta	-	3a	Tos
LB	-	S525T	n-MOSFET	HF, LN, 20V, 30mA, 200mW, Idss=5..14mA	SOT-23	16fi	-	3a	Tfk
LB	-	Si1305DL	p-MOSFET	V-MOS, LogL, 8V, ±0.86A, <0.53Ω	SOT-323	16fh	-	3a	Six
LB-	-	RT9818B-45PV	Vdet-IC	4.5V±1.5%, -Reset ODO, Td=55ms	SOT-23	16vda	VD6	3a	Rct
LBL	-	KTC4075-L	Si-npn	AF, 60V, 150mA, 100mW, B=350..700, >80MHz	SOT-323	16ta	-	3f	Kec
lc	-	PT7M6230CLC3	Vdet-IC	3.0V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
lc	-	PT7M6230CLTA3	Vdet-IC	3.0V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
lc	cf	PT7M6230CLC3E	Vdet-IC	3.0V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
lc	cf	PT7M6230CLTA3E	Vdet-IC	3.0V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
LC	-	2SC2462-C	Si-npn	AF, 50V, 100mA, 150mW, B=160..320	SOT-23	16ta	-	3a	Ren
LC	-	2SC5850-C	Si-npn	GP, AF, 50V, 100mA, 150mW, >100MHz, B=160..320	SOT-23	16ta	-	3a	Ren
LC	-	ELM7632HDB	Vdet-IC	3.2V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
LC	-	Si1307DL	p-MOSFET	V-MOS, LogL, 12V, ±0.85A, <0.58Ω	SOT-323	16fh	-	3a	Six
LC-	-	RT9819A-40PV	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
ld	-	PT7M6230CHC3	Vdet-IC	3.0V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
ld	-	PT7M6230CHTA3	Vdet-IC	3.0V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
ld	cf	PT7M6230CHC3E	Vdet-IC	3.0V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
ld	cf	PT7M6230CHTA3E	Vdet-IC	3.0V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
LD	-	2SC2462-D	Si-npn	AF, 50V, 100mA, 150mW, B=250..500	SOT-23	16ta	-	3a	Ren
LD	-	2SC5850-D	Si-npn	GP, AF, 50V, 100mA, 150mW, >100MHz, B=250..500	SOT-23	16ta	-	3a	Ren
LD	-	AX6601-15R	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23L	16cg	VR1	3b	Axl
LD	-	ELM7633HDB	Vdet-IC	3.3V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
LD-	-	RT9818A-28PV	Vdet-IC	2.8V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
LD0	cx	BL8534CB3TR50	DC-DC-IC	PFM step-up, 5.0V±2%, 200mA	SOT-23	16bq	DC2	3d	Shb
LD0	cy	BL8534CB3TR60	DC-DC-IC	PFM step-up, 6.0V±2%, 200mA	SOT-23	16bq	DC2	3d	Shb
LD0	cz	BL8534CB3TR30	DC-DC-IC	PFM step-up, 3.0V±2%, 200mA	SOT-23	16bq	DC2	3d	Shb
LD0	da	BL8534CB3TR40	DC-DC-IC	PFM step-up, 4.0V±2%, 200mA	SOT-23	16bq	DC2	3d	Shb
LD2	da	BL8534CB3TR42	DC-DC-IC	PFM step-up, 4.2V±2%, 200mA	SOT-23	16bq	DC2	3d	Shb
LD3	-	BAT54S	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<0.52V(100mA), <5ns	SOT-23	16dl	-	3a	Ons
LD3	-	BAT54TSGP	Si-diode	Dual, SBD, 30V, 200mA, Vf<1V(100mA), 5ns	SOT-23	16dl	-	3a	Chm
LD3	cz	BL8534CB3TR33	DC-DC-IC	PFM step-up, 3.3V±2%, 200mA	SOT-23	16bq	DC2	3d	Shb
LD4	-	CH706D-40PT	Si-diode	Dual, SBD, 45V, 30mA, Vf<0.37V(1mA)	SOT-23	16dl	-	3a	Chm
LD5	da	BL8534CB3TR45	DC-DC-IC	PFM step-up, 4.5V±2%, 200mA	SOT-23	16bq	DC2	3d	Shb
LD5	db	BL8534CB3TR25	DC-DC-IC	PFM step-up, 2.5V±2%, 200mA	SOT-23	16bq	DC2	3d	Shb
LD6	-	CHBD3004PT	Si-diode	Sw, 350V, 225mA, Vf<1V(100mA), 50ns	SOT-23	16dc	-	3a	Chm
LD6	cz	BL8534CB3TR36	DC-DC-IC	PFM step-up, 3.6V±2%, 200mA	SOT-23	16bq	DC2	3d	Shb
LD7	-	CHBD3004APT	Si-diode	Dual, Sw, 350V, 225mA, Vf<1V(100mA), 50ns	SOT-23	16df	-	3a	Chm
LD7	db	BL8534CB3TR27	DC-DC-IC	PFM step-up, 2.7V±2%, 200mA	SOT-23	16bq	DC2	3d	Shb
LD8	-	CHBD3004CPT	Si-diode	Dual, Sw, 350V, 225mA, Vf<1V(100mA), 50ns	SOT-23	16dg	-	3a	Chm
LD8	cz	BL8534CB3TR38	DC-DC-IC	PFM step-up, 3.8V±2%, 200mA	SOT-23	16bq	DC2	3d	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LD8	db	BL8534CB3TR28	DC-DC-IC	PFM step-up, 2.8V±2%, 200mA	SOT-23	16bq	DC2	3d	Shb
LD9	-	CHBD3004SGP	Si-diode	Dual, Sw, 350V, 225mA, Vf<1V(100mA), 50ns	SOT-23	16dl	-	3a	Chm
LDs	-	BF543	n-MOSFET	HF, 20V, 30mA, 200mW, Idss>1.5mA, Up<1.5V, 300MHz	SOT-23	16fi	-	3a	Sil
le	-	PT7M6230NLC3	Vdet-IC	3.0V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
le	-	PT7M6230NLTA3	Vdet-IC	3.0V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
le	cf	PT7M6230NLC3E	Vdet-IC	3.0V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
le	cf	PT7M6230NLTA3E	Vdet-IC	3.0V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
LE	-	2SC3052-E	Si-npn	AF, 50V, 200mA, 150mW, B=150..300, 200MHz	SC-59	16ta	-	3a	Mit
LE	-	2SC4154-E	Si-npn	AF-Amp, 50V, 200mA, 150mW, 200MHz, B=150..300	SOT-323	16ta	-	3a	Mit
LE	-	2SC5383-E	Si-npn	AF-Amp, 50V, 200mA, 125mW, 200MHz, B=150..300	SC-75A	16ta	-	3a	Ish
LE	-	2SC5804-E	Si-npn	AF-Amp, 50V, 200mA, 100mW, 200MHz, B=150..300	T-USM	18ta	-	3a	Ish
LE	-	BF660W	Si-pnp	VHF-Osc, 40V, 25mA, 800MHz	SOT-323	16ta	-	3c	Inf
LE	-	ELM7634HDB	Vdet-IC	3.4V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
LE-	-	RT9818F-38PV	Vdet-IC	3.8V±1.5%, +Reset ODO, Td=55ms	SOT-23	16vda	VD6	3a	Rct
LEp	-	BF660	Si-pnp	VHF-Osc, 40V, 25mA, 650MHz	SOT-23	16ta	-	3a	Phi
LEs	-	BF660W	Si-pnp	VHF-Osc, 40V, 25mA, 800MHz	SOT-323	16ta	-	3a	Sie
LEs	-	BSR302N	n-MOSFET	LogL, 30V, 3.7A, 500mW, Rds=18mΩ(3.7A), 6.8/16.2ns	SC-59	16fh	-	3c	Inf
lf	-	PT7M6231CLC3	Vdet-IC	3.1V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
lf	-	PT7M6231CLTA3	Vdet-IC	3.1V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
lf	cf	PT7M6231CLC3E	Vdet-IC	3.1V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
lf	cf	PT7M6231CLTA3E	Vdet-IC	3.1V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
LF	-	2SC3052-F	Si-npn	AF, 50V, 200mA, 150mW, B=250..500, 200MHz	SC-59	16ta	-	3a	Mit
LF	-	2SC4154-F	Si-npn	AF-Amp, 50V, 200mA, 150mW, 200MHz, B=250..500	SOT-323	16ta	-	3a	Mit
LF	-	2SC5383-F	Si-npn	AF-Amp, 50V, 200mA, 125mW, 200MHz, B=250..500	SC-75A	16ta	-	3a	Ish
LF	-	2SC5804-F	Si-npn	AF-Amp, 50V, 200mA, 100mW, 200MHz, B=250..500	T-USM	18ta	-	3a	Ish
LF	-	ELM7635HDB	Vdet-IC	3.5V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
LF	-	RN1111FS	Si-npn-Digi	Sw, 20V, 50mA, 50mW, R1=10k	fSM	19ta	-	3a	Tos
LF-	-	RT9818E-27PV	Vdet-IC	2.7V±1.5%, +Reset ODO	SOT-23	16vdc	VD6	3a	Rct
LFs	-	BSR802N	n-MOSFET	LogL, 20V, 3.7A, 500mW, Rds=17mΩ(3.7A), 9.8/26ns	SC-59	16fh	-	3c	Inf
lg	-	PT7M6231CHC3	Vdet-IC	3.1V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
lg	-	PT7M6231CHTA3	Vdet-IC	3.1V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
lg	cf	PT7M6231CHC3E	Vdet-IC	3.1V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
lg	cf	PT7M6231CHTA3E	Vdet-IC	3.1V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
LG	-	2SC2712-GR	Si-npn	GP, AF, 50V, 150mA, 150mW, B=200..400, >80MHz	SOT-23	16ta	-	3a	Tos
LG	-	2SC3052-G	Si-npn	AF, 50V, 200mA, 150mW, B=400..800, 200MHz	SC-59	16ta	-	3a	Mit
LG	-	2SC4116-GR	Si-npn	GP, AF, 50V, 150mA, 100mW, B=200..400, >80MHz	SOT-323	16ta	-	3a	Tos
LG	-	2SC4154-G	Si-npn	AF-Amp, 50V, 200mA, 150mW, 200MHz, B=400..800	SOT-323	16ta	-	3a	Mit
LG	-	2SC4738F-GR	Si-npn	AF-Amp, 60V, 150mA, 100mW, >80MHz, B=200..400	SOT-490	18ta	-	3a	Tos
LG	-	2SC4738FT-GR	Si-npn	AF-Amp, 60V, 150mA, 100mW, >80MHz, B=200..400	TESM	18ta	-	3a	Tos
LG	-	2SC4738-GR	Si-npn	AF-Amp, 60V, 150mA, 100mW, >80MHz, B=200..400	SOT-23	16ta	-	3a	Tos
LG	-	2SC5383-G	Si-npn	AF-Amp, 50V, 200mA, 125mW, 200MHz, B=400..800	SC-75A	16ta	-	3a	Ish
LG	-	2SC5804-G	Si-npn	AF-Amp, 50V, 200mA, 100mW, 200MHz, B=400..800	T-USM	18ta	-	3a	Ish
LG	-	AX6601-18R	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23L	16cg	VR1	3b	Axl
LG	-	BF767	Si-pnp	VHF/UHF-LN, 950MHz	SOT-23	16ta	-	3a	Sie
LG	-	ELM7636HDB	Vdet-IC	3.6V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
LG-	-	RT9819C-28PV	Vdet-IC	2.8V±1.5%, -Reset PPO, Td=220ms	SOT-23	16vdc	VD7	3a	Rct
LGR	-	KTC4075-R	Si-npn	AF, 60V, 150mA, 100mW, B=200..400, >80MHz	SOT-323	16ta	-	3f	Kec
LGs	-	BF775A	Si-npn	VHF/UHF, 25V, 30mA, 280mW, B=50..250, 5.8GHz	SOT-23	16ta	-	3a	Sie
lh	-	PT7M6231NLC3	Vdet-IC	3.1V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
lh	-	PT7M6231NLTA3	Vdet-IC	3.1V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
lh	cf	PT7M6231NLC3E	Vdet-IC	3.1V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
lh	cf	PT7M6231NLTA3E	Vdet-IC	3.1V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
LH	-	BF569	Si-pnp	UHF-Mix/Osc, 40V, 30mA, 200mW, B=25..90, 1GHz	SOT-23	16ta	-	3a	Sil
LH	-	ELM7637HDB	Vdet-IC	3.7V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
LH	-	RN1112FS	Si-npn-Digi	Sw, 20V, 50mA, 50mW, R1=22k	fSM	19ta	-	3a	Tos
LH-	-	RT9819A-42PV	Vdet-IC	4.2V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
LHp	-	BF569	Si-pnp	UHF-Mix/Osc, 40V, 30mA, 200mW, B=25..90, 1GHz	SOT-23	16ta	-	3a	Phi
LHs	-	BF569	Si-pnp	UHF-Mix/Osc, 40V, 30mA, 200mW, B=25..90, 1GHz	SOT-23	16ta	-	3a	Sie
LHs	-	BF569W	Si-pnp	UHF-Mix/Osc, 40V, 30mA, 200mW, B=25..90, 1GHz	SOT-323	16ta	-	3a	Sie
li	-	PT7M6232CLC3	Vdet-IC	3.2V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
li	-	PT7M6232CLTA3	Vdet-IC	3.2V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
li	cf	PT7M6232CLC3E	Vdet-IC	3.2V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
li	cf	PT7M6232CLTA3E	Vdet-IC	3.2V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
lj	-	PT7M6232CHC3	Vdet-IC	3.2V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
lj	-	PT7M6232CHTA3	Vdet-IC	3.2V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
lj	cf	PT7M6232CHC3E	Vdet-IC	3.2V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
lj	cf	PT7M6232CHTA3E	Vdet-IC	3.2V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
LJ	-	2SK1848	n-MOSFET	Sw, 60V, 400mA, 250mW, <1.6Ω(200mA), 5/35nA	SOT-23	16fh	-	3a	San
LJ	-	ELM7638HDB	Vdet-IC	3.8V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
LJ	-	RN1113FS	Si-npn-Digi	Sw, 20V, 50mA, 50mW, R1=47k	fSM	19ta	-	3a	Tos

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LJp	-	BF579	Si-pnp	VHF/UHF, 20V, 25mA, 200mW, B=20..90, 1.75GHz	SOT-23	16ta	-	3a	Phi
lk	-	PT7M6232NLC3	Vdet-IC	3.2V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
lk	-	PT7M6232NLTA3	Vdet-IC	3.2V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
lk	cf	PT7M6232NLC3E	Vdet-IC	3.2V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
lk	cf	PT7M6232NLTA3E	Vdet-IC	3.2V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
LK	-	BF799	Si-npn	TV-IF-Out, (SAW-Filter), 20V 35mA, 800..1100MHz	SOT-23	16ta	-	3a	Sie
LK	-	BF799W	Si-npn	TV-IF-Out, (SAW-Filter), 20V 35mA, 800..1100MHz	SOT-323	16ta	-	3c	Inf
LK	-	ELM7639HDB	Vdet-IC	3.9V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
LK8	-	CHBD2004CPT	Si-diode	Dual, Sw, 300V, 200mA, Vf<1V(100mA), 50ns	SOT-23	16dg	-	3a	Chm
LKs	-	BF799	Si-npn	TV-IF-Out, (SAW-Filter), 20V 35mA, 800..1100MHz	SOT-23	16ta	-	3a	Sie
LKs	-	BF799W	Si-npn	TV-IF-Out, (SAW-Filter), 20V 35mA, 800..1100MHz	SOT-323	16ta	-	3a	Sie
ll	-	PT7M6233CLC3	Vdet-IC	3.3V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
ll	-	PT7M6233CLTA3	Vdet-IC	3.3V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
ll	cf	PT7M6233CLC3E	Vdet-IC	3.3V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
ll	cf	PT7M6233CLTA3E	Vdet-IC	3.3V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
LL	-	2SA1518	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	San
LL	-	2SC2712-BL	Si-npn	GP, AF, 50V, 150mA, 150mW, B=350..700, >80MHz	SOT-23	16ta	-	3a	Tos
LL	-	2SC4116-BL	Si-npn	GP, AF, 50V, 150mA, 100mW, B=350..700, >80MHz	SOT-323	16ta	-	3a	Tos
LL	-	2SC4738-BL	Si-npn	AF-Amp, 60V, 150mA, 100mW, >80MHz, B=350..700	SOT-23	16ta	-	3a	Tos
lm	-	PT7M6233CHC3	Vdet-IC	3.3V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
lm	-	PT7M6233CHTA3	Vdet-IC	3.3V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
lm	cf	PT7M6233CHC3E	Vdet-IC	3.3V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
lm	cf	PT7M6233CHTA3E	Vdet-IC	3.3V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
LM	-	BF569R	Si-pnp	UHF-Mix/Osc, 40V, 30mA, 200mW, B=25..90, 1GHz	SOT-23	16te	-	3a	Sil
LM-	-	RT9819B-33PV	Vdet-IC	3.3V±1.5%, -Reset PPO, Td=55ms	SOT-23	16vdc	VD7	3a	Rct
ln	-	PT7M6233NLC3	Vdet-IC	3.3V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
ln	-	PT7M6233NLTA3	Vdet-IC	3.3V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
ln	cf	PT7M6233NLC3E	Vdet-IC	3.3V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
ln	cf	PT7M6233NLTA3E	Vdet-IC	3.3V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
LN	-	2SC5488	Si-npn	VHF/UHF LN, 20V, 70mA, 100mW, B=90..200, 7GHz	SSFP	18ta	-	3a	San
LN3	-	2SC5226-3	Si-npn	VHF/UHF, LN, 20V, 70mA, 150mW, B=60..120, 7GHz	MCP	16ta	-	3a	San
LN3	-	2SC5227-3	Si-npn	VHF/UHF, LN, 20V, 70mA, 200mW, B=60..120, 7GHz	SOT-23	16ta	-	3a	San
LN4	-	2SC5226-4	Si-npn	VHF/UHF, LN, 20V, 70mA, 150mW, B=90..180, 7GHz	MCP	16ta	-	3a	San
LN4	-	2SC5227-4	Si-npn	VHF/UHF, LN, 20V, 70mA, 200mW, B=90..180, 7GHz	SOT-23	16ta	-	3a	San
LN5	-	2SC5226-5	Si-npn	VHF/UHF, LN, 20V, 70mA, 150mW, B=135..270, 7GHz	MCP	16ta	-	3a	San
LN5	-	2SC5227-5	Si-npn	VHF/UHF, LN, 20V, 70mA, 200mW, B=135..270, 7GHz	SOT-23	16ta	-	3a	San
lo	-	PT7M6234CLC3	Vdet-IC	3.4V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
lo	-	PT7M6234CLTA3	Vdet-IC	3.4V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
lo	cf	PT7M6234CLC3E	Vdet-IC	3.4V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
lo	cf	PT7M6234CLTA3E	Vdet-IC	3.4V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
LO	-	2SC2712-O	Si-npn	GP, AF, 50V, 150mA, 150mW, B=70..140, >80MHz	SOT-23	16ta	-	3a	Tos
LO	-	2SC4116-O	Si-npn	GP, AF, 50V, 150mA, 100mW, B=70..140, >80MHz	SOT-323	16ta	-	3a	Tos
LO	-	BSR174	p-FET	Sw, Chopper, 30V, 50mA, 300mW, Idss=20..135mA, Rds=85Ω, 7/15ns	SOT-23	16fj	-	3a	Phi
LO	-	HSMP-3860	PIN-diode	RF, 50V, 1A(1ms), <0.2pF, <3Ω(100mA)	SOT-23	16dc	-	3a	Agi
LOs	-	BF775	Si-npn	VHF/UHF, 20V, 30mA, 280mW, B=40..250, 4.5GHz	SOT-23	16ta	-	3a	Sie
LOs	-	BF775W	Si-npn	VHF/UHF, 20V, 30mA, 280mW, B>40..200, 5GHz	SOT-323	16ta	-	3a	Sie
lp	-	PT7M6234CHC3	Vdet-IC	3.4V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
lp	-	PT7M6234CHTA3	Vdet-IC	3.4V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
lp	cf	PT7M6234CHC3E	Vdet-IC	3.4V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
lp	cf	PT7M6234CHTA3E	Vdet-IC	3.4V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
LP	-	BSR175	p-FET	Sw, Chopper, 30V, 50mA, 300mW, Idss=7..70mA, Rds=125Ω, 5/30ns	SOT-23	16fj	-	3a	Phi
lq	-	PT7M6234NLC3	Vdet-IC	3.4V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
lq	-	PT7M6234NLTA3	Vdet-IC	3.4V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
lq	cf	PT7M6234NLC3E	Vdet-IC	3.4V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
lq	cf	PT7M6234NLTA3E	Vdet-IC	3.4V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
LQ	-	2SD1821A-Q	Si-npn	AF, LN, 185V, 100mA, 150mW, B=85..170, 150MHz	SOT-323	16ta	-	3a	Pan
LQ	-	2SD814A-Q	Si-npn	AF, LN, 185V, 50mA, 200mW, B=90..155, 150MHz	SC-59	16ta	-	3a	Pan
LQ	-	AX6601-25R	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23L	16cg	VR1	3b	Axl
LQ	-	BSR176	p-FET	Sw, Chopper, 30V, 50mA, 300mW, Idss=2..35mA, Rds=250Ω, 15/35ns	SOT-23	16fj	-	3a	Phi
LQ-	-	RT9818C-23PV	Vdet-IC	2.3V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
lr	-	PT7M6235CLC3	Vdet-IC	3.5V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
lr	-	PT7M6235CLTA3	Vdet-IC	3.5V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
lr	cf	PT7M6235CLC3E	Vdet-IC	3.5V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
lr	cf	PT7M6235CLTA3E	Vdet-IC	3.5V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
LR	-	2SD1821A-R	Si-npn	AF, LN, 185V, 100mA, 150mW, B=130..220, 150MHz	SOT-323	16ta	-	3a	Pan
LR	-	2SD2240A-R	Si-npn	AF, LN, 185V, 100mA, 125mW, B=130..200, 150MHz	SOT-416	16ta	-	3a	Pan
LR	-	2SD814A-R	Si-npn	AF, LN, 185V, 50mA, 200mW, B=130..220, 150MHz	SC-59	16ta	-	3a	Pan
LR	-	BSR177	p-FET	Sw, Chopper, 30V, 50mA, 300mW, Idss=1.5..20mA, Rds=300Ω, 20/45ns	SOT-23	16fj	-	3a	Phi
LR	-	CAT809LSDI-GT3	Vdet-IC	4.63V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3d	Ons
LR	-	CAT809LTBI-GT3	Vdet-IC	4.62V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LR-	-	RT9818C-13PV	Vdet-IC	1.3V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
LRs	-	BF517	Si-npn	RF, 25V, 25mA, 280mW, 2.5GHz, B=40..150	SOT-23	16ta	-	3c	Inf
ls	-	PT7M6235CHC3	Vdet-IC	3.5V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
ls	-	PT7M6235CHTA3	Vdet-IC	3.5V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
ls	cf	PT7M6235CHC3E	Vdet-IC	3.5V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
ls	cf	PT7M6235CHTA3E	Vdet-IC	3.5V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
LS	-	2SA1838	Si-pnp	Mute, 15V, 100mA, 200mW, B=200..600, 600MHz	MCP	16ta	-	3a	San
LS	-	2SA1839	Si-pnp	Mute, 15V, 100mA, 200mW, B=200..600, 600MHz	SOT-23	16ta	-	3a	San
LS	-	2SD1821A-S	Si-npn	AF, LN, 185V, 100mA, 150mW, B=185..330, 150MHz	SOT-323	16ta	-	3a	Pan
LS	-	2SD2240A-S	Si-npn	AF, LN, 185V, 100mA, 125mW, B=185..330, 150MHz	SOT-416	16ta	-	3a	Pan
LS	-	2SD814A-S	Si-npn	AF, LN, 185V, 50mA, 200mW, B=185..330, 150MHz	SC-59	16ta	-	3a	Pan
LS	-	CAT810LSDI-GT3	Vdet-IC	4.63V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3d	Ons
LS	-	CAT810LTBI-GT3	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ons
LS-	-	RT9819F-27PV	Vdet-IC	2.7V±1.5%, +Reset PPO, Td=55ms	SOT-23	16vdc	VD7	3a	Rct
LSs	-	BF770A	Si-npn	SATV-IF, 20V, 50mA, 6GHz	SOT-23	16ta	-	3a	Sie
lt	-	PT7M6235NLC3	Vdet-IC	3.5V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
lt	-	PT7M6235NLTA3	Vdet-IC	3.5V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
lt	cf	PT7M6235NLC3E	Vdet-IC	3.5V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
lt	cf	PT7M6235NLTA3E	Vdet-IC	3.5V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
LT	-	2SD1821A-T	Si-npn	AF, LN, 185V, 100mA, 150mW, B=220..400, 150MHz	SOT-323	16ta	-	3a	Pan
LT	-	2SD814A-T	Si-npn	AF, LN, 185V, 50mA, 200mW, B=220..400, 150MHz	SC-59	16ta	-	3a	Pan
LT	-	AX6601-28R	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23L	16cg	VR1	3b	Axl
LT	-	CHT817PT-Q	Si-npn	AF, Sw, 45V, 500mA, B=100..250, 170MHz	SOT-23	16ta	-	3a	Chm
LT-	-	RT9819A-36PV	Vdet-IC	3.6V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
LT6	-	2SD2028-6	Si-npn	AF, 8V, 600mA, 200mW, B=200..400, 200MHz, Z-Di(B > C)	SOT-23	16ta	-	3a	San
LT7	-	2SD2028-7	Si-npn	AF, 8V, 600mA, 200mW, B=300..600, 200MHz, Z-Di(B > C)	SOT-23	16ta	-	3a	San
LT8	-	2SD2028-8	Si-npn	AF, 8V, 600mA, 200mW, B=450..900, 200MHz, Z-Di(B > C)	SOT-23	16ta	-	3a	San
LTAC	-	LT1460HCS3-2.5	Vref-IC	µPower, Precision, Series, 2.5V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTAD	-	LT1460JCS3-2.5	Vref-IC	µPower, Precision, Series, 2.5V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTAE	-	LT1460KCS3-2.5	Vref-IC	µPower, Precision, Series, 2.5V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTAK	-	LT1460HCS3-5	Vref-IC	µPower, Precision, Series, 5.0V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTAL	-	LT1460JCS3-5	Vref-IC	µPower, Precision, Series, 5.0V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTAM	-	LT1460KCS3-5	Vref-IC	µPower, Precision, Series, 5.0V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTAN	-	LT1460HCS3-3	Vref-IC	µPower, Precision, Series, 3.0V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTAP	-	LT1460JCS3-3	Vref-IC	µPower, Precision, Series, 3.0V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTAQ	-	LT1460KCS3-3	Vref-IC	µPower, Precision, Series, 3.0V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTAR	-	LT1460HCS3-3.3	Vref-IC	µPower, Precision, Series, 3.3V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTAS	-	LT1460JCS3-3.3	Vref-IC	µPower, Precision, Series, 3.3V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTAT	-	LT1460KCS3-3.3	Vref-IC	µPower, Precision, Series, 3.3V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTAU	-	LT1460HCS3-10	Vref-IC	µPower, Precision, Series, 10V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTAV	-	LT1460JCS3-10	Vref-IC	µPower, Precision, Series, 10V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTAW	-	LT1460KCS3-10	Vref-IC	µPower, Precision, Series, 10V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTH8	-	LT1460HCS3-2.5	Vref-IC	µPower, Precision, Series, 2.5V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTH8	-	LT1460JCS3-2.5	Vref-IC	µPower, Precision, Series, 2.5V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTH8	-	LT1460KCS3-2.5	Vref-IC	µPower, Precision, Series, 2.5V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTH9	-	LT1460HCS3-3	Vref-IC	µPower, Precision, Series, 3.0V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTH9	-	LT1460JCS3-3	Vref-IC	µPower, Precision, Series, 3.0V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTH9	-	LT1460KCS3-3	Vref-IC	µPower, Precision, Series, 3.0V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJ1	-	LT1460HCS3-3.3	Vref-IC	µPower, Precision, Series, 3.3V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJ1	-	LT1460JCS3-3.3	Vref-IC	µPower, Precision, Series, 3.3V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJ1	-	LT1460KCS3-3.3	Vref-IC	µPower, Precision, Series, 3.3V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJ2	-	LT1460HCS3-5	Vref-IC	µPower, Precision, Series, 5.0V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJ2	-	LT1460JCS3-5	Vref-IC	µPower, Precision, Series, 5.0V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJ2	-	LT1460KCS3-5	Vref-IC	µPower, Precision, Series, 5.0V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJ3	-	LT1460HCS3-10	Vref-IC	µPower, Precision, Series, 10V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJ3	-	LT1460JCS3-10	Vref-IC	µPower, Precision, Series, 10V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJ3	-	LT1460KCS3-10	Vref-IC	µPower, Precision, Series, 10V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJN	-	LT1460BCS3-2.5	Vref-IC	µPower, Precision, Series, 2.5V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJP	-	LT1460BCS3-3.0	Vref-IC	µPower, Precision, Series, 3.0V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJQ	-	LT1460BCS3-3.3	Vref-IC	µPower, Precision, Series, 3.3V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJR	-	LT1460BCS3-5	Vref-IC	µPower, Precision, Series, 5.0V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJS	-	LT1460BCS3-10	Vref-IC	µPower, Precision, Series, 10V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJT	-	LT1460BIS3-2.5	Vref-IC	µPower, Precision, Series, 2.5V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJU	-	LT1460BIS3-3.0	Vref-IC	µPower, Precision, Series, 3.0V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJV	-	LT1460BIS3-3.3	Vref-IC	µPower, Precision, Series, 3.3V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJW	-	LT1460BIS3-5	Vref-IC	µPower, Precision, Series, 5.0V±0.075%	SOT-23	16vj	VR1	3a	Ltc
LTJX	-	LT1460BIS3-10	Vref-IC	µPower, Precision, Series, 10V±0.075%	SOT-23	16vj	VR1	3a	Ltc
lu	-	PT7M6236CLC3	Vdet-IC	3.6V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
lu	-	PT7M6236CLTA3	Vdet-IC	3.6V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
lu	cf	PT7M6236CLC3E	Vdet-IC	3.6V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
lu	cf	PT7M6236CLTA3E	Vdet-IC	3.6V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
LU-	-	RT9818C-16PV	Vdet-IC	1.6V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vdc	VD6	3a	Rct
lv	-	PT7M6236CHC3	Vdet-IC	3.6V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
lv	-	PT7M6236CHTA3	Vdet-IC	3.6V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
lv	cf	PT7M6236CHC3E	Vdet-IC	3.6V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
lv	cf	PT7M6236CHTA3E	Vdet-IC	3.6V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
LV-	-	RT9166-13PVL	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Rct
LV1	-	CH661DPT	Si-diode	SBD, 60V, 500mA, Vf<0.63V(500mA)	SOT-23	16dc	-	3a	Chm
LV3	-	BAT34PT	Si-diode	SBD, 30V, 100mA, Vf<1V(100mA), 5ns	SOT-23	16dc	-	3a	Chm
LV3	-	CH420DPT	Si-diode	SBD, 40V, 100mA, Vf<0.45V(10mA)	SOT-23	16dc	-	3a	Chm
LV4	-	BAT54GP	Si-diode	SBR, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dc	-	3a	Chm
LV6	-	CH421DPT	Si-diode	SBD, 40V, 100mA, Vf<0.55V(100mA)	SOT-23	16dc	-	3a	Chm
lw	-	PT7M6236NLC3	Vdet-IC	3.6V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
lw	-	PT7M6236NLTA3	Vdet-IC	3.6V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
lw	cf	PT7M6236NLC3E	Vdet-IC	3.6V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
lw	cf	PT7M6236NLTA3E	Vdet-IC	3.6V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
LW	-	AX6601-30R	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23L	16cg	VR1	3b	Axl
LW-	-	RT9819B-15PV	Vdet-IC	1.5V±1.5%, -Reset PPO, Td=55ms	SOT-23	16vdc	VD7	3a	Rct
lx	-	PT7M6237CLC3	Vdet-IC	3.7V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
lx	-	PT7M6237CLTA3	Vdet-IC	3.7V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
lx	cf	PT7M6237CLC3E	Vdet-IC	3.7V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
lx	cf	PT7M6237CLTA3E	Vdet-IC	3.7V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
LX-	-	RT9161A-32PV	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-23	16cg	VR1	3a	Rct
ly	-	PT7M6237CHC3	Vdet-IC	3.7V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
ly	-	PT7M6237CHTA3	Vdet-IC	3.7V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
ly	cf	PT7M6237CHC3E	Vdet-IC	3.7V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
ly	cf	PT7M6237CHTA3E	Vdet-IC	3.7V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
LY	-	2SC2712-Y	Si-npn	GP, AF, 50V, 150mA, 150mW, B=120..240, >80MHz	SOT-23	16ta	-	3a	Tos
LY	-	2SC4116-Y	Si-npn	GP, AF, 50V, 150mA, 100mW, B=120..240, >80MHz	SOT-323	16ta	-	3a	Tos
LY	-	2SC4738FT-Y	Si-npn	AF-Amp, 60V, 150mA, 100mW, >80MHz, B=120..240	TESM	18ta	-	3a	Tos
LY	-	2SC4738F-Y	Si-npn	AF-Amp, 60V, 150mA, 100mW, >80MHz, B=120..240	SOT-490	18ta	-	3a	Tos
LY	-	2SC4738-Y	Si-npn	AF-Amp, 60V, 150mA, 100mW, >80MHz, B=120..240	SOT-23	16ta	-	3a	Tos
LY	-	KTC4075-Y	Si-npn	AF, 60V, 150mA, 100mW, B>120..240, >80MHz	SOT-323	16ta	-	3f	Kec
LY=	-	RT9818D-12GV	Vdet-IC	1.2V±1.5%, -Reset ODO, Td=450ms	SOT-23	16vdc	VD6	3a	Rct
LY2	-	2SC3772-2	Si-npn	UHF, Osc-Mix, 25V, 70mA, 250mW, 3GHz, B=40..80	SOT-23	16ta	-	3a	San
LY2	-	2SC4403-2	Si-npn	UHF, Osc, 25V, 70mA, 150mW, B=40..80, 3GHz	MCP	16ta	-	3a	San
LY3	-	2SC3772-3	Si-npn	UHF, Osc-Mix, 25V, 70mA, 250mW, 3GHz, B=60..120	SOT-23	16ta	-	3a	San
LY3	-	2SC4403-3	Si-npn	UHF, Osc, 25V, 70mA, 150mW, B=60..120, 3GHz	MCP	16ta	-	3a	San
LY4	-	2SC3772-4	Si-npn	UHF, Osc-Mix, 25V, 70mA, 250mW, 3GHz, B=100..200	SOT-23	16ta	-	3a	San
LY4	-	2SC4403-4	Si-npn	UHF, Osc, 25V, 70mA, 150mW, B=100..200, 3GHz	MCP	16ta	-	3a	San
lz	-	PT7M6237NLC3	Vdet-IC	3.7V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
lz	-	PT7M6237NLTA3	Vdet-IC	3.7V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
lz	cf	PT7M6237NLC3E	Vdet-IC	3.7V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
lz	cf	PT7M6237NLTA3E	Vdet-IC	3.7V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
LZ=	-	RT9819D-13GV	Vdet-IC	1.3V±1.5%, -Reset PPO, Td=450ms	SOT-23	16vdc	VD7	3a	Rct
m	-	AX6902FA	Vdet-IC	2.63V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Axl
M	-	NT354	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, 200MHz, R1/R2=10k/10k	SOT-923	19ta	-	3k	Auk
M	cr	ELM7533NEB	Vdet-IC	3.3V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
M	cs	ELM7533CEB	Vdet-IC	3.3V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
M•E	-	2SA1235A-E	Si-pnp	AF-Amp, 60V, 200mA, 200mW, 200MHz, B=150..300	SC-59	16ta	-	3a	Mit
M•E	-	2SA1602-E	Si-pnp	AF, 50V, 200mA, 150mW, 200MHz, B=150..300	SOT-323	16ta	-	3a	Mit
M•F	-	2SA1235A-F	Si-pnp	AF-Amp, 60V, 200mA, 200mW, 200MHz, B=250..500	SC-59	16ta	-	3a	Mit
M•F	-	2SA1602-F	Si-pnp	AF, 50V, 200mA, 150mW, 200MHz, B=250..500	SOT-323	16ta	-	3a	Mit
M0	-	AP8821N-40GC	Vdet-IC	4.0V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
M0	-	AP8821N-40GT	Vdet-IC	4.0V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
M0	-	AP8821N-40PC	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
M0	-	AP8821N-40PT	Vdet-IC	4.0V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
M0	-	BL8554CB3TR10	LVR-IC	LDO, 1.0V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M0	-	ELM7630LAB	Vdet-IC	3.0V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
M0	-	R1100D101C	LVR-IC	µ-low Icc, 1.0V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
M0	-	R3111N402C	Vdet-IC	4V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
M0	-	R3130N40BC	Vdet-IC	4V±1.5%, -Reset ODO, 100ms	SOT-23	16vdc	VD6	3b	Ric
M0	-	TC54VN2002ECB	Vdet-IC	2.0V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
M0	cg	BL8554CB3TR30	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M0	ch	BL8554CB3TR20	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M0	ci	BL8554CB3TR40	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M0=	-	RT9161A-28GV	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-23	16cg	VR1	3a	Rct
M03	-	XC61CN2002M	Vdet-IC	2.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
M03	-	XE61CN2045MR	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
M05	-	LN61FN2012M	Vdet-IC	2.0V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M05	-	SM05	TVS	Dual, Vrwm=5V, 17A, 300W(1ms)	SOT-23	16df	-	3a	Smt
M05	-	TC51N2002ECB	Vdet-IC	2.0V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
M05	-	XC61FN2012M	Vdet-IC	2.0V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
M05	-	XC61HN2012MR	Vdet-IC	2.0V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
M06	-	LN61FN2042M	Vdet-IC	2.0V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
M06	-	XC61FN2042M	Vdet-IC	2.0V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
M06	-	XC61HN2042MR	Vdet-IC	2.0V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
M07	-	LN61FN2052M	Vdet-IC	2.0V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
M07	-	XC61FN2052M	Vdet-IC	2.0V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
M07	-	XC61HN2052MR	Vdet-IC	2.0V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
M1	-	2SC5066-O	Si-npn	VHF/UHF, LN, 20V, 30mA, 100mW, 7GHz, B=80..160	SOT-323	16ta	-	3a	Tos
M1	-	AP8821N-41GC	Vdet-IC	4.1V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
M1	-	AP8821N-41GT	Vdet-IC	4.1V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
M1	-	AP8821N-41PC	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
M1	-	AP8821N-41PT	Vdet-IC	4.1V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
M1	-	BFR30	n-FET	GP, 25V, 10mA, 225mW, Up<5V	SOT-23	16fj	-	3a	Ons
M1	-	BL8554CB3TR11	LVR-IC	LDO, 1.1V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M1	-	ELM7631LAB	Vdet-IC	3.1V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
M1	-	MAS3781	Si-diode	SBD, Sw, 30V, 30mA, Vf<1V(30mA), 1.5pF, 1ns	SSSMini3-F1	18dc	-	3a	Pan
M1	-	MMBZ5256B	Z-diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 350mW	SOT-23	16dc	-	3c	Pjt
M1	-	MMBZ5256BW	Z-diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 150mW	SOT-523	16dc	-	3a	Di
M1	-	MMBZ5256BW	Z-diode	30V±5%, Izt=4.2mA, Zzt=49Ω, 200mW	SOT-323	16dc	-	3c	Pjt
M1	-	R1100D111C	LVR-IC	μ-low Icc, 1.1V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
M1	-	R3111N412C	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
M1	-	R3130N44BC	Vdet-IC	4.4V±1.5%, -Reset ODO, 100ms	SOT-23	16vdc	VD6	3b	Ric
M1	-	TC54VN2102ECB	Vdet-IC	2.1V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
M1	cg	BL8554CB3TR31	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M1	ch	BL8554CB3TR21	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M1	ci	BL8554CB3TR41	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M12	-	SM12	TVS	Dual, Vrwm=12V, 12A, 300W(1ms)	SOT-23	16df	-	3a	Smt
M13	-	XC61CN2102M	Vdet-IC	2.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
M13	-	XE61CN2145MR	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
M15	-	2SA1411-15	Si-pnp	Sw, 25V, 150mA, 250mW, B=350..700	SOT-23	16ta	-	3a	Nec
M15	-	2SA1613-15	Si-pnp	Hi-beta, 25V, 150mA, B=135..270	SOT-23	16ta	-	3a	Nec
M15	-	LN61FN2112M	Vdet-IC	2.1V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
M15	-	SM15	TVS	Dual, Vrwm=15V, 10A, 300W(1ms)	SOT-23	16df	-	3a	Smt
M15	-	TC51N2102ECB	Vdet-IC	2.1V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
M15	-	XC61FN2112M	Vdet-IC	2.1V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
M15	-	XC61HN2112MR	Vdet-IC	2.1V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
M16	-	2SA1411-16	Si-pnp	Sw, 25V, 150mA, 250mW, B=5000..1000	SOT-23	16ta	-	3a	Nec
M16	-	2SA1613-16	Si-pnp	Hi-beta, 25V, 150mA, B=200..400	SOT-23	16ta	-	3a	Nec
M16	-	LN61FN2142M	Vdet-IC	2.1V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
M16	-	XC61FN2142M	Vdet-IC	2.1V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
M16	-	XC61HN2142MR	Vdet-IC	2.1V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
M17	-	LN61FN2152M	Vdet-IC	2.1V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
M17	-	XC61FN2152M	Vdet-IC	2.1V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
M17	-	XC61HN2152MR	Vdet-IC	2.1V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
M1B	-	MMBT2222L	Si-npn	GP, 60V, 800mA, 200mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Mot
M1E	-	MMBTA43	Si-npn	Vid, 200V, 500mA, 300mW, B>40, >50MHz	SOT-23	16ta	-	3a	Mot
M1F	-	MMBT5550	Si-npn	HV, 140V, 600mA, 225mW, B=80..250, >300MHz	SOT-23	16ta	-	3a	Mot
M1J	-	MMBT2369	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120	SOT-23	16ta	-	3a	Mot
M1p	-	BFR30	n-FET	GP, 25V, 10mA, 250mW, Up<5V	SOT-23	16fj	-	3a	Phi
M1T	-	ADM1811-10AKS	Vdet-IC	4.35V±2%, -Reset ODO	SOT-323	16vda	VD6	3a	Ad
M1T	-	ADM1811-10ART	Vdet-IC	4.35V±2%, -Reset ODO	SOT-23	16vda	VD6	3a	Ad
M1V	-	ADM1811-5AKS	Vdet-IC	4.62V±2%, -Reset ODO	SOT-323	16vda	VD6	3a	Ad
M1V	-	ADM1811-5ART	Vdet-IC	4.62V±2%, -Reset ODO	SOT-23	16vda	VD6	3a	Ad
M1X	-	MA3X075D	Si-diode	Dual, Band-sw, 25V, 100mA, Vf=0.92V(100mA), 0.9pF	SC-59	16df	-	3a	Pan
M1X	-	MA3Z080D	Si-diode	Dual, Band-sw, 35V, 100mA, Vf=0.92V(100mA), 0.9pF	SOT-323	16df	-	3a	Pan
M1X	-	MA75WA	Si-diode	Dual, Band-sw, 25V, 100mA, Vf=0.92V(100mA), 0.9pF	SC-59	16df	-	3a	Pan
M1X	-	MA80WA	Si-diode	Dual, Band-sw, 35V, 100mA, Vf=0.92V(100mA), 0.9pF	SOT-323	16df	-	3a	Pan
M1Y	-	MA3X075E	Si-diode	Dual, Band-sw, 25V, 100mA, Vf=0.92V(100mA), 0.9pF	SC-59	16dg	-	3a	Pan
M1Y	-	MA3Z080E	Si-diode	Dual, Band-sw, 35V, 100mA, Vf=0.92V(100mA), 0.9pF	SOT-323	16dg	-	3a	Pan
M1Y	-	MA75WK	Si-diode	Dual, Band-sw, 25V, 100mA, Vf=0.92V(100mA), 0.9pF	SC-59	16dg	-	3a	Pan
M1Y	-	MA80WK	Si-diode	Dual, Band-sw, 35V, 100mA, Vf=0.92V(100mA), 0.9pF	SOT-323	16dg	-	3a	Pan
M2	-	2SC5066-Y	Si-npn	VHF/UHF, LN, 20V, 30mA, 100mW, 7GHz, B=120..240	SOT-323	16ta	-	3a	Tos
M2	-	AP8821N-42GC	Vdet-IC	4.2V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
M2	-	AP8821N-42GT	Vdet-IC	4.2V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
M2	-	AP8821N-42PC	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
M2	-	AP8821N-42PT	Vdet-IC	4.2V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
M2	-	BFR31	n-FET	GP, 25V, 5mA, 225mW, Up<5V	SOT-23	16fj	-	3a	Ons

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M2	-	BL8554CB3TR12	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M2	-	ELM7632LAB	Vdet-IC	3.2V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
M2	-	MMBZ5257B	Z-diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 350mW	SOT-23	16dc	-	3c	Pjt
M2	-	MMBZ5257BW	Z-diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 150mW	SOT-523	16dc	-	3a	Di
M2	-	MMBZ5257BW	Z-diode	33V±5%, Izt=3.8mA, Zzt=58Ω, 200mW	SOT-323	16dc	-	3c	Pjt
M2	-	R1100D121C	LVR-IC	µ-low Icc, 1.2V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
M2	-	R3111N422C	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
M2	-	R3130N26BC3	Vdet-IC	2.6V±1.5%, -Reset ODO, 100ms	SOT-23	16vdc	VD6	3b	Ric
M2	-	TC54VN2202ECB	Vdet-IC	2.2V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
M2	cg	BL8554CB3TR32	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M2	ch	BL8554CB3TR22	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M2	ci	BL8554CB3TR42	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M2=	-	RT9818C-33GVL	Vdet-IC	3.3V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vdc	VD6	3a	Rct
M23	-	XC61CN2202M	Vdet-IC	2.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
M23	-	XE61CN2245MR	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
M24	-	SM24	TVS	Dual, Vrwm=24V, 5A, 300W(1ms)	SOT-23	16df	-	3a	Smt
M25	-	LN61FN2212M	Vdet-IC	2.2V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
M25	-	TC51N2202ECB	Vdet-IC	2.2V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
M25	-	XC61FN2212M	Vdet-IC	2.2V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
M25	-	XC61HN2212MR	Vdet-IC	2.2V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
M26	-	LN61FN2242M	Vdet-IC	2.2V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
M26	-	XC61FN2242M	Vdet-IC	2.2V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
M26	-	XC61HN2242MR	Vdet-IC	2.2V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
M27	-	LN61FN2252M	Vdet-IC	2.2V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
M27	-	XC61FN2252M	Vdet-IC	2.2V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
M27	-	XC61HN2252MR	Vdet-IC	2.2V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
M2A	-	MMBT2222A	Si-npn	GP, 75V, 600mA, 225mW, B=35..300, >200MHz	SOT-23	16ta	-	3a	Ctc
M2B	-	MMBT2907A	Si-pnp	GP, 60V, 500mA, 310mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Mot
M2B	-	MMBT2907L	Si-pnp	GP, 40V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Mot
M2C	-	MMBTA70	Si-pnp	GP, 40V, 100mA, 225mW, B=40..400, >125MHz	SOT-23	16ta	-	3a	Mot
M2F	-	MMBT2907A	Si-pnp	GP, 60V, 500mA, 310mW, B=75..300, <200MHz	SOT-23	16ta	-	3a	Ons
M2H	-	MA3X555	PIN-diode	Dual, UHF/SHF-AGC, 40V, 100mA, Vf=1V(100mA), 0.3pF	SC-59	16ea	-	3a	Pan
M2H	-	MA555	PIN-diode	Dual, UHF/SHF-AGC, 40V, 100mA, Vf=1V(100mA), 0.3pF	SC-59	16ea	-	3a	Pan
M2p	-	BFR31	n-FET	GP, 25V, 5mA, 250mW, Up<5V	SOT-23	16fj	-	3a	Phi
M2X	-	MA3X730	Si-diode	Dual, SBD UHF-mix, 5V, 100mA, Vf=0.25V(2mA), 0.85pF	SC-59	16dl	-	3a	Pan
M3	-	2SA812-3	Si-pnp	GP, AF, 60V, 100mA, 200mW, B=70..140, 180MHz	SOT-23	16ta	-	3a	Nec
M3	-	2SA812A-3	Si-pnp	GP, AF, 60V, 100mA, 200mW, B=70..140, 180MHz	SOT-23	16ta	-	3a	Nec
M3	-	AP8821N-43GC	Vdet-IC	4.3V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
M3	-	AP8821N-43GT	Vdet-IC	4.3V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
M3	-	AP8821N-43PC	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
M3	-	AP8821N-43PT	Vdet-IC	4.3V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
M3	-	BL8554CB3TR13	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M3	-	ELM7633LAB	Vdet-IC	3.3V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
M3	-	ILC5061IC23X	Vdet-IC	2.3V±2%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
M3	-	ILC5061M23X	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
M3	-	KST812-M3	Si-pnp	GP, 50V, 100mA, 350mW, B=60..120	SOT-23	16ta	-	3a	Sam
M3	-	MMBA812M3	Si-pnp	GP, 50V, 100mA, 350mW, B=60..120	SOT-23	16ta	-	3a	Sam
M3	-	MMBZ5258B	Z-diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 350mW	SOT-23	16dc	-	3c	Pjt
M3	-	MMBZ5258BW	Z-diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 150mW	SOT-523	16dc	-	3a	Di
M3	-	MMBZ5258BW	Z-diode	36V±5%, Izt=3.4mA, Zzt=70Ω, 200mW	SOT-323	16dc	-	3c	Pjt
M3	-	R1100D131C	LVR-IC	µ-low Icc, 1.3V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
M3	-	R3111N432C	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
M3	-	R3130N29BC3	Vdet-IC	2.9V±1.5%, -Reset ODO, 100ms	SOT-23	16vdc	VD6	3b	Ric
M3	-	TC54VN2302ECB	Vdet-IC	2.3V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
M3	cg	BL8554CB3TR33	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M3	ch	BL8554CB3TR23	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M3	ci	BL8554CB3TR43	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M3=	-	RT9818D-13GV	Vdet-IC	1.3V±1.5%, -Reset ODO, Td=450ms	SOT-23	16vdc	VD6	3a	Rct
M30	-	FN1L4L	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/22k	SC-59	16ta	-	3a	Nec
M30	-	GN1L4L	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/22k	SOT-323	16ta	-	3a	Nec
M30	-	MA3X557	PIN-diode	Dual, UHF/SHF-AGC, 40V, 100mA, Vf=1V(100mA), 0.3pF	SC-59	16dl	-	3a	Pan
M30	-	MA557	PIN-diode	Dual, UHF/SHF-AGC, 40V, 100mA, Vf=1V(100mA), 0.3pF	SC-59	16dl	-	3a	Pan
M31	-	FN1L4M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/47k	SC-59	16ta	-	3a	Nec
M31	-	GN1L4M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/47k	SOT-323	16ta	-	3a	Nec
M32	-	FN1F4M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/22k	SC-59	16ta	-	3a	Nec
M32	-	GN1F4M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/22k	SOT-323	16ta	-	3a	Nec
M33	-	FN1A4M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/10k	SC-59	16ta	-	3a	Nec
M33	-	GN1A4M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/10k	SOT-323	16ta	-	3a	Nec
M33	-	XC61CN2302M	Vdet-IC	2.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
M33	-	XE61CN2345MR	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M34	-	FN1A4P	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/47k	SC-59	16ta	-	3a	Nec
M34	-	GN1A4P	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/47k	SOT-323	16ta	-	3a	Nec
M35	-	FN1F4N	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/47k	SC-59	16ta	-	3a	Nec
M35	-	GN1F4N	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/47k	SOT-323	16ta	-	3a	Nec
M35	-	LN61FN2312M	Vdet-IC	2.3V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
M35	-	TC51N2302ECB	Vdet-IC	2.3V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
M35	-	XC61FN2312M	Vdet-IC	2.3V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
M35	-	XC61HN2312MR	Vdet-IC	2.3V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
M36	-	FN1L3Z-Q	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=4k7, B=135..270	SC-59	16ta	-	3a	Nec
M36	-	GN1L3Z-Q	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=4k7, B=135..270	SOT-323	16ta	-	3a	Nec
M36	-	LN61FN2342M	Vdet-IC	2.3V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
M36	-	SM36	TVS	Dual, Vrwm=36V, 4A, 300W(1ms)	SOT-23	16df	-	3a	Smt
M36	-	XC61FN2342M	Vdet-IC	2.3V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
M36	-	XC61HN2342MR	Vdet-IC	2.3V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
M37	-	FN1L3Z-P	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=4k7, B=200..400	SC-59	16ta	-	3a	Nec
M37	-	GN1L3Z-P	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=4k7, B=200..400	SOT-323	16ta	-	3a	Nec
M37	-	LN61FN2352M	Vdet-IC	2.3V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
M37	-	XC61FN2352M	Vdet-IC	2.3V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
M37	-	XC61HN2352MR	Vdet-IC	2.3V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
M38	-	FN1L3Z-K	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=4k7, B=135..270	SC-59	16ta	-	3a	Nec
M38	-	GN1L3Z-K	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=4k7, B=135..270	SOT-323	16ta	-	3a	Nec
M3A	-	ILC5061AIC23X	Vdet-IC	2.3V±1%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
M3A	-	ILC5061AM23X	Vdet-IC	2.3V±1%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
M3A	-	MMBTH24	Si-npn	40V, 50mA, 300mW, B>30, >400MHz	SOT-23	16ta	-	3a	Mot
M3B	-	MMBT918	Si-npn	VHF/UHF, 30V, 50mA, 225mW, B>20, 60MHz	SOT-23	16ta	-	3a	Mot
M3J	-	MMBTH69	Si-pnp	UHF/VHF, 15V, 50mA, 225mW, B=30..300, >2GHz	SOT-23	16ta	-	3a	Mot
M3p	-	BFT46	n-FET	AF/HF, 25V, 250mW, Idss>0.2mA, Up<1.2V, 0.5ms	SOT-23	16fj	-	3a	Phi
M3S	-	MA3Z070	Si-diode	Dual, Band-sw, 35V, 100mA, Vf=0.92V(100mA), 0.9pF	SOT-323	16dl	-	3a	Pan
M3S	-	MA70	Si-diode	Dual, Band-sw, 35V, 100mA, Vf=0.92V(100mA), 0.9pF	SOT-323	16dl	-	3a	Pan
M3T	-	ADM1813-10AKS	Vdet-IC	4.35V±2%, -Reset ODO	SOT-323	16vda	VD6	3a	Ad
M3T	-	ADM1813-10ART	Vdet-IC	4.35V±2%, -Reset ODO	SOT-23	16vda	VD6	3a	Ad
M3V	-	ADM1813-5AKS	Vdet-IC	4.62V±2%, -Reset ODO	SOT-323	16vda	VD6	3a	Ad
M3V	-	ADM1813-5ART	Vdet-IC	4.62V±2%, -Reset ODO	SOT-23	16vda	VD6	3a	Ad
M4	-	2SA1179-4	Si-pnp	GP, AF, 55V, 150mA, 200mW, B=90..180, 180MHz	CPA	16ta	-	3a	San
M4	-	2SA1611-4	Si-pnp	AF, 60V, 100mA, 150mW, B=90..180, 180MHz	SOT-323	16ta	-	3a	Nec
M4	-	2SA1836-4	Si-pnp	AF, 60V, 100mA, 200mW, B=90..180, >50MHz	SOT-416	16ta	-	3a	Nec
M4	-	2SA812-4	Si-pnp	GP, AF, 60V, 100mA, 200mW, B=90..180, 180MHz	SOT-23	16ta	-	3a	Nec
M4	-	2SA812A-4	Si-pnp	GP, AF, 60V, 100mA, 200mW, B=90..180, 180MHz	SOT-23	16ta	-	3a	Nec
M4	-	AP8821N-44GC	Vdet-IC	4.4V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
M4	-	AP8821N-44GT	Vdet-IC	4.4V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
M4	-	AP8821N-44PC	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
M4	-	AP8821N-44PT	Vdet-IC	4.4V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
M4	-	BL8554CB3TR14	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M4	-	BSR56	n-FET	Sw, 40V, 250mW, Idss>50mA, Up<10V	SOT-23	16fj	-	3a	Nsc
M4	-	ELM7634LAB	Vdet-IC	3.4V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
M4	-	KST812-M4	Si-pnp	GP, 50V, 100mA, 350mW, B=90..180	SOT-23	16ta	-	3a	Sam
M4	-	LM4040C25IDC	Vref-IC	µPower, Precision, Shunt, 2.50V±0.5%	SC-70	16dk	RF1	3d	Ti
M4	-	MAS3781E	Si-diode	Dual, SBD, Sw, 30V, 30mA, Vf<1V(30mA), 1.5pF, 1ns	SSSMini3-F1	18dg	-	3a	Pan
M4	-	MMBA812M4	Si-pnp	GP, 50V, 100mA, 350mW, B=90..180	SOT-23	16ta	-	3a	Sam
M4	-	MMBZ5259B	Z-diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 350mW	SOT-23	16dc	-	3c	Pjt
M4	-	MMBZ5259BW	Z-diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 150mW	SOT-523	16dc	-	3a	Di
M4	-	MMBZ5259BW	Z-diode	39V±5%, Izt=3.2mA, Zzt=80Ω, 200mW	SOT-323	16dc	-	3c	Pjt
M4	-	R1100D141C	LVR-IC	µ-low Icc, 1.4V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
M4	-	R3111N442C	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
M4	-	R3130N30BC8	Vdet-IC	3V±1.5%, -Reset ODO, 100ms	SOT-23	16vdc	VD6	3b	Ric
M4	-	TC54VN2402ECB	Vdet-IC	2.4V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
M4	cg	BL8554CB3TR34	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M4	ch	BL8554CB3TR24	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M4	ci	BL8554CB3TR44	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M4=	-	RT9818C-15GV	Vdet-IC	1.5V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vdc	VD6	3a	Rct
M43	-	XC61CN2402M	Vdet-IC	2.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
M43	-	XE61CN2445MR	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
M45	-	LN61FN2412M	Vdet-IC	2.4V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
M45	-	TC51N2402ECB	Vdet-IC	2.4V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
M45	-	XC61FN2412M	Vdet-IC	2.4V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
M45	-	XC61HN2412MR	Vdet-IC	2.4V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
M46	-	LN61FN2442M	Vdet-IC	2.4V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
M46	-	XC61FN2442M	Vdet-IC	2.4V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
M46	-	XC61HN2442MR	Vdet-IC	2.4V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
M47	-	LN61FN2452M	Vdet-IC	2.4V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M47	-	XC61FN2452M	Vdet-IC	2.4V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
M47	-	XC61HN2452MR	Vdet-IC	2.4V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
M4A	-	MMBT4401	Si-npn	GP, 60V, 600mA, 225mW, B=100..300, 250MHz	SOT-23	16ta	-	3a	Pjt
M4A	-	MMBT4401W	Si-npn	GP, 60V, 600mA, 225mW, B=100..300, 250MHz	SOT-323	16ta	-	3a	Pjt
M4B	-	MMBV432	C-diode	Dual, FM-Tuning, 14V, 43/48.1pF(2V)	SOT-23	16dg	-	3a	Mot
M4C	-	MA3X558	PIN-diode	Dual, UHF/SHF-AGC, 40V, 100mA, Vf=1V(100mA), 0.3pF	SC-59	16dg	-	3a	Pan
M4C	-	MA558	PIN-diode	Dual, UHF/SHF-AGC, 40V, 100mA, Vf=1V(100mA), 0.3pF	SC-59	16dg	-	3a	Pan
M4F	-	MMBD353	Si-diode	Dual, UHF-Mix, 7V, 10mA, Vf<0.6V(10mA), <1pF	SOT-23	16ea	-	3a	Ons
M4L	-	MA200A	Si-diode	Sw, 80V, 100mA, Vf<1.2V(100mA), <100ns	SC-59	16eb	-	3a	Pan
M4M	-	MA200K	Si-diode	Sw, 80V, 100mA, Vf<1.2V(100mA), <100ns	SC-59	16dc	-	3a	Pan
M4P	-	BSR56	n-FET	Sw, 40V, 250mW, Idss>50mA, Up<10V	SOT-23	16fj	-	3a	Phi
M5	-	2SA1179-5	Si-pnp	GP, AF, 55V, 150mA, 200mW, B=135..270, 180MHz	CPA	16ta	-	3a	San
M5	-	2SA1611-5	Si-pnp	AF, 60V, 100mA, 150mW, B=135..270, 180MHz	SOT-323	16ta	-	3a	Nec
M5	-	2SA1622-5	Si-pnp	GP, 55V, 150mA, 150mW, 180MHz, B=135..270	MCP	16ta	-	3a	San
M5	-	2SA1836-5	Si-pnp	AF, 60V, 100mA, 200mW, B=135..270, >50MHz	SOT-416	16ta	-	3a	Nec
M5	-	2SA812-5	Si-pnp	GP, AF, 60V, 100mA, 200mW, B=135..270, 180MHz	SOT-23	16ta	-	3a	Nec
M5	-	2SA812A-5	Si-pnp	GP, AF, 60V, 100mA, 200mW, B=135..270, 180MHz	SOT-23	16ta	-	3a	Nec
M5	-	2SC5086FT-O	Si-npn	VHF/UHF, LN, 20V, 80mA, 100mW, 7GHz, B=80..160	TESM	18ta	-	3a	Tos
M5	-	2SC5086-O	Si-npn	VHF/UHF, LN, 20V, 80mA, 100mW, 7GHz, B=80..160	SOT-323	16ta	-	3a	Tos
M5	-	AP8821N-45GC	Vdet-IC	4.5V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
M5	-	AP8821N-45GT	Vdet-IC	4.5V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
M5	-	AP8821N-45PC	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
M5	-	AP8821N-45PT	Vdet-IC	4.5V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
M5	-	BL8554CB3TR15	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M5	-	ELM7635LAB	Vdet-IC	3.5V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
M5	-	ILC5061IC25X	Vdet-IC	2.5V±2%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
M5	-	ILC5061M25X	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
M5	-	KST812-M5	Si-pnp	GP, 50V, 100mA, 350mW, B=135..270	SOT-23	16ta	-	3a	Sam
M5	-	LM4040D50IDC	Vref-IC	µPower, Precision, Shunt, 5.00V±1%	SC-70	16dk	RF1	3d	Ti
M5	-	MAS3784	Si-diode	SBD, Sw, 30V, 100mA, Vf<0.55V(100mA), 20pF, 2ns	SSSMini3-F1	18dc	-	3a	Pan
M5	-	MMBA812M5	Si-pnp	GP, 50V, 100mA, 350mW, B=135..270	SOT-23	16ta	-	3a	Sam
M5	-	MMBD352W	Si-diode	Dual, UHF-Mix, 7V, 10mA, Vf<0.6V(10mA), <1pF	SOT-323	16dl	-	3a	Ons
M5	-	MMBZ5260B	Z-diode	43V±5%, Izt=3.0mA, Zzt=93Ω, 350mW	SOT-23	16dc	-	3c	Pjt
M5	-	MMBZ5260BW	Z-diode	43V±5%, Izt=3.0mA, Zzt=93Ω, 200mW	SOT-323	16dc	-	3c	Pjt
M5	-	R1100D151C	LVR-IC	µ-low Icc, 1.5V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
M5	-	R3111N452C	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
M5	-	R3130N46BC5	Vdet-IC	4.6V±1.5%, -Reset ODO, 100ms	SOT-23	16vdc	VD6	3b	Ric
M5	-	TC54VN2502ECB	Vdet-IC	2.5V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
M5	cg	BL8554CB3TR35	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M5	ch	BL8554CB3TR25	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M5	ci	BL8554CB3TR45	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M512	-	AMS5312	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M513	-	AMS5313	LVR-IC	LDO, 1.3V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M514	-	AMS5314	LVR-IC	LDO, 1.4V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M515	-	AMS5315	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M516	-	AMS5316	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M517	-	AMS5317	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M518	-	AMS5318	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M519	-	AMS5319	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M520	-	AMS5320	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M521	-	AMS5321	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M522	-	AMS5322	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M523	-	AMS5323	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M524	-	AMS5324	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M525	-	AMS5325	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M526	-	AMS5326	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M527	-	AMS5327	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M528	-	AMS5328	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M529	-	AMS5329	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M53	-	XC61CN2502M	Vdet-IC	2.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
M53	-	XE61CN2545MR	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
M530	-	AMS5330	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M531	-	AMS5331	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M532	-	AMS5332	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M533	-	AMS5333	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M534	-	AMS5334	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M535	-	AMS5335	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M536	-	AMS5336	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M537	-	AMS5337	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M538	-	AMS5338	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M539	-	AMS5339	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M540	-	AMS5340	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M541	-	AMS5341	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M542	-	AMS5342	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M543	-	AMS5343	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M544	-	AMS5344	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M545	-	AMS5345	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M546	-	AMS5346	LVR-IC	LDO, 4.6V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M547	-	AMS5347	LVR-IC	LDO, 4.7V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M548	-	AMS5348	LVR-IC	LDO, 4.8V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M549	-	AMS5349	LVR-IC	LDO, 4.9V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M55	-	LN61FN2512M	Vdet-IC	2.5V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
M55	-	TC51N2502ECB	Vdet-IC	2.5V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
M55	-	XC61FN2512M	Vdet-IC	2.5V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
M55	-	XC61HN2512MR	Vdet-IC	2.5V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
M550	-	AMS5350	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M551	-	AMS5351	LVR-IC	LDO, 5.1V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M552	-	AMS5352	LVR-IC	LDO, 5.2V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M553	-	AMS5353	LVR-IC	LDO, 5.3V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M554	-	AMS5354	LVR-IC	LDO, 5.4V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M555	-	AMS5355	LVR-IC	LDO, 5.5V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M556	-	AMS5356	LVR-IC	LDO, 5.6V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M557	-	AMS5357	LVR-IC	LDO, 5.7V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M558	-	AMS5358	LVR-IC	LDO, 5.8V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M559	-	AMS5359	LVR-IC	LDO, 5.9V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M56	-	LN61FN2542M	Vdet-IC	2.5V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
M56	-	XC61FN2542M	Vdet-IC	2.5V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
M56	-	XC61HN2542MR	Vdet-IC	2.5V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
M560	-	AMS5360	LVR-IC	LDO, 6.0V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M561	-	AMS5361	LVR-IC	LDO, 6.1V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M562	-	AMS5362	LVR-IC	LDO, 6.2V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M563	-	AMS5363	LVR-IC	LDO, 6.3V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M564	-	AMS5364	LVR-IC	LDO, 6.4V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M565	-	AMS5368	LVR-IC	LDO, 6.5V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M566	-	AMS5366	LVR-IC	LDO, 6.6V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M567	-	AMS5367	LVR-IC	LDO, 6.7V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M568	-	AMS5368	LVR-IC	LDO, 6.8V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M569	-	AMS5369	LVR-IC	LDO, 6.9V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M57	-	LN61FN2552M	Vdet-IC	2.5V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
M57	-	XC61FN2552M	Vdet-IC	2.5V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
M57	-	XC61HN2552MR	Vdet-IC	2.5V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
M570	-	AMS5370	LVR-IC	LDO, 7.0V±2%, 500mA	SOT-23	16ch	VR1	3a	Ams
M5A	-	ADM1815-20AKS	Vdet-IC	2.55V±2%, -Reset PPO	SOT-323	16vda	VD7	3a	Ad
M5A	-	ADM1815-20ART	Vdet-IC	2.55V±2%, -Reset PPO	SOT-23	16vda	VD7	3a	Ad
M5A	-	ILC5061AIC25X	Vdet-IC	2.5V±1%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
M5A	-	ILC5061AM25X	Vdet-IC	2.5V±1%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
M5B	-	ADM1815-R22AKS	Vdet-IC	2.18V±2%, -Reset PPO	SOT-323	16vda	VD7	3a	Ad
M5B	-	ADM1815-R22ART	Vdet-IC	2.18V±2%, -Reset PPO	SOT-23	16vda	VD7	3a	Ad
M5C	-	ADM1815-R23AKS	Vdet-IC	2.31V±2%, -Reset PPO	SOT-323	16vda	VD7	3a	Ad
M5C	-	ADM1815-R23ART	Vdet-IC	2.31V±2%, -Reset PPO	SOT-23	16vda	VD7	3a	Ad
M5C	-	MMBD7000	Si-diode	Dual, Sw, 100V, 200mA, Vf<1.1V(100mA), <1.5pF	SOT-23	16dl	-	3a	Ons
M5E	-	ADM1815-10AKS	Vdet-IC	2.88V±2%, -Reset PPO	SOT-323	16vda	VD7	3a	Ad
M5E	-	ADM1815-10ART	Vdet-IC	2.88V±2%, -Reset PPO	SOT-23	16vda	VD7	3a	Ad
M5G	-	MMBD352	Si-diode	Dual, UHF-Mix, 7V, 10mA, Vf<0.6V(10mA), <1pF	SOT-23	16dl	-	3a	Ons
M5H	-	MA3XD14E	Si-diode	Dual, SBD Sw, 20V, 100mA, Vf<0.4V(100mA), 25pF	SC-59	16dg	-	3a	Pan
M5K	-	ADM1815-5AKS	Vdet-IC	3.06V±2%, -Reset PPO	SOT-323	16vda	VD7	3a	Ad
M5K	-	ADM1815-5ART	Vdet-IC	3.06V±2%, -Reset PPO	SOT-23	16vda	VD7	3a	Ad
M5K	-	MA3XD17	Si-diode	SBR, HF. 100V, 300mA, Vf=0.5V(300mA), 25pF	SC-59	16dc	-	3a	Pan
M5M	-	MA3X200F	Si-diode	Dual, Sw, 80V, 100mA, Vf<1.2V(100mA), <100ns	SC-59	16dl	-	3a	Pan
M5P	-	BSR57	n-FET	Sw, 40V, 250mW, Idss>20mA, Up<6V	SOT-23	16fj	-	3a	Phi
M6	-	2SA1179-6	Si-pnp	GP, AF, 55V, 150mA, 200mW, B=150..300, 180MHz	CPA	16ta	-	3a	San
M6	-	2SA1611-6	Si-pnp	AF, 60V, 100mA, 150mW, B=200..400, 180MHz	SOT-323	16ta	-	3a	Nec
M6	-	2SA1622-6	Si-pnp	GP, 55V, 150mA, 150mW, 180MHz, B=200..400	MCP	16ta	-	3a	San
M6	-	2SA1836-6	Si-pnp	AF, 60V, 100mA, 200mW, B=200..400, >50MHz	SOT-416	16ta	-	3a	Nec
M6	-	2SA812-6	Si-pnp	GP, AF, 60V, 100mA, 200mW, B=200..400, 180MHz	SOT-23	16ta	-	3a	Nec
M6	-	2SA812A-6	Si-pnp	GP, AF, 60V, 100mA, 200mW, B=200..400, 180MHz	SOT-23	16ta	-	3a	Nec
M6	-	2SC5086FT-Y	Si-npn	VHF/UHF, LN, 20V, 80mA, 100mW, 7GHz, B=120..240	TESM	18ta	-	3a	Tos
M6	-	2SC5086-Y	Si-npn	VHF/UHF, LN, 20V, 80mA, 100mW, 7GHz, B=120..240	SOT-323	16ta	-	3a	Tos
M6	-	AP8821N-46GC	Vdet-IC	4.6V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
M6	-	AP8821N-46GT	Vdet-IC	4.6V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M6	-	AP8821N-46PC	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
M6	-	AP8821N-46PT	Vdet-IC	4.6V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
M6	-	BL8554CB3TR16	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M6	-	BSS66	Si-npn	Sw, 60V, 0.1A, 250MHz, <70/250ns, B>50	SOT-23	16ta	-	3a	Fer
M6	-	ELM7636LAB	Vdet-IC	3.6V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
M6	-	ILC5061IC26X	Vdet-IC	2.6V±2%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
M6	-	ILC5061M26X	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
M6	-	KST812-M6	Si-pnp	GP, 50V, 100mA, 350mW, B=200..400	SOT-23	16ta	-	3a	Sam
M6	-	MMBA812M6	Si-pnp	GP, 50V, 100mA, 350mW, B=200..400	SOT-23	16ta	-	3a	Sam
M6	-	R1100D161C	LVR-IC	µ-low Icc, 1.6V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
M6	-	R3111N462C	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
M6	-	TC54VN2602ECB	Vdet-IC	2.6V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
M6	cg	BL8554CB3TR36	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M6	ch	BL8554CB3TR26	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M6=	-	RT9818D-26GV	Vdet-IC	2.6V±1.5%, -Reset ODO, Td=450ms	SOT-23	16vdc	VD6	3a	Rct
M61	-	FN1L4Z-Q	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=47k, B=300.600	SC-59	16ta	-	3a	Nec
M61	-	GN1L4Z-Q	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=4k7, B=300..600	SOT-323	16ta	-	3a	Nec
M62	-	FN1L4Z-P	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=47k, B=200..400	SC-59	16ta	-	3a	Nec
M62	-	GN1L4Z-P	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=4k7, B=200..400	SOT-323	16ta	-	3a	Nec
M63	-	FN1L4Z-K	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=47k, B=135..270	SC-59	16ta	-	3a	Nec
M63	-	GN1L4Z-K	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=47k, B=135..270	SOT-323	16ta	-	3a	Nec
M63	-	XC61CN2602M	Vdet-IC	2.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
M63	-	XE61CN2645MR	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
M64	-	FN1F4Z-K	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=22k, B=135..270	SC-59	16ta	-	3a	Nec
M64	-	GN1F4Z-Q	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=22k, B=300..600	SOT-323	16ta	-	3a	Nec
M65	-	BF545A	n-FET	VHF Amp, osc, mix, 30V, 6.5mA, 250mW, Up<8V, 1GHz	SOT-23	16fa	-	3a	Phi
M65	-	FN1F4Z-P	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=22k, B=200..400	SC-59	16ta	-	3a	Nec
M65	-	GN1F4Z-P	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=22k, B=200..400	SOT-323	16ta	-	3a	Nec
M65	-	LN61FN2612M	Vdet-IC	2.6V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
M65	-	TC51N2602ECB	Vdet-IC	2.6V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
M65	-	XC61FN2612M	Vdet-IC	2.6V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
M65	-	XC61HN2612MR	Vdet-IC	2.6V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
M66	-	BF545B	n-FET	VHF Amp, osc, mix, 30V, 15mA, 250mW, Up<8V, 1GHz	SOT-23	16fa	-	3a	Phi
M66	-	FN1F4Z-1	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=22k, B=300.600	SC-59	16ta	-	3a	Nec
M66	-	GN1F4Z-K	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=22k, B=135..270	SOT-323	16ta	-	3a	Nec
M66	-	LN61FN2642M	Vdet-IC	2.6V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
M66	-	XC61FN2642M	Vdet-IC	2.6V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
M66	-	XC61HN2642MR	Vdet-IC	2.6V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
M67	-	BF545C	n-FET	VHF Amp, osc, mix, 30V, 25mA, 250mW, Up<8V, 1GHz	SOT-23	16fa	-	3a	Phi
M67	-	FN1A4Z-K	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=10k, B=135..270	SC-59	16ta	-	3a	Nec
M67	-	GN1A4Z-Q	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=10k, B=300..600	SOT-323	16ta	-	3a	Nec
M67	-	LN61FN2652M	Vdet-IC	2.6V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
M67	-	XC61FN2652M	Vdet-IC	2.6V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
M67	-	XC61HN2652MR	Vdet-IC	2.6V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
M68	-	FN1A4Z-P	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=10k, B=200..400	SC-59	16ta	-	3a	Nec
M68	-	GN1A4Z-P	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=10k, B=200..400	SOT-323	16ta	-	3a	Nec
M69	-	FN1A4Z-Q	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=10k, B=300..600	SC-59	16ta	-	3a	Nec
M69	-	GN1A4Z-K	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=10k, B=135..270	SOT-323	16ta	-	3a	Nec
M6A	-	ADM1816-20AKS	Vdet-IC	2.55V±2%, -Reset ODO	SOT-323	16vda	VD6	3a	Ad
M6A	-	ADM1816-20ART	Vdet-IC	2.55V±2%, -Reset ODO	SOT-23	16vda	VD6	3a	Ad
M6A	-	ILC5061AIC26X	Vdet-IC	2.6V±1%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
M6A	-	ILC5061AM26X	Vdet-IC	2.6V±1%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
M6A	-	MMBF4416	n-FET	VHF-UHF-Amp, 30V, 10mA, 225mW, Up<6V	SOT-23	16fj	-	3a	Ons
M6B	-	ADM1816-R22AKS	Vdet-IC	2.18V±2%, -Reset ODO	SOT-323	16vda	VD6	3a	Ad
M6B	-	ADM1816-R22ART	Vdet-IC	2.18V±2%, -Reset ODO	SOT-23	16vda	VD6	3a	Ad
M6C	-	ADM1816-R23AKS	Vdet-IC	2.31V±2%, -Reset ODO	SOT-323	16vda	VD6	3a	Ad
M6C	-	ADM1816-R23ART	Vdet-IC	2.31V±2%, -Reset ODO	SOT-23	16vda	VD6	3a	Ad
M6E	-	ADM1816-10AKS	Vdet-IC	2.88V±2%, -Reset ODO	SOT-323	16vda	VD6	3a	Ad
M6E	-	ADM1816-10ART	Vdet-IC	2.88V±2%, -Reset ODO	SOT-23	16vda	VD6	3a	Ad
M6H	-	MMBD354	Si-diode	Dual, UHF-Mix, 7V, 10mA, Vf<0.6V(10mA), <1pF	SOT-23	16dg	-	3a	Ons
M6H	-	S9015LT1-H	Si-pnp	GP, 50V, 100mA, 200mW, B=450..1000, >150MHz	SOT-23	16ta	-	3a	Wtr
M6K	-	ADM1816-5AKS	Vdet-IC	3.06V±2%, -Reset ODO	SOT-323	16vda	VD6	3a	Ad
M6K	-	ADM1816-5ART	Vdet-IC	3.06V±2%, -Reset ODO	SOT-23	16vda	VD6	3a	Ad
M6L	-	S9015LT1-L	Si-pnp	GP, 50V, 100mA, 200mW, B=120..450, >150MHz	SOT-23	16ta	-	3a	Wtr
M6P	-	BSR58	n-FET	Sw, 40V, 250mW, Idss>8mA, Up<4V	SOT-23	16fj	-	3a	Phi
M7	-	2SA1179-7	Si-pnp	GP, AF, 55V, 150mA, 200mW, B=175..350, 180MHz	CPA	16ta	-	3a	San
M7	-	2SA1611-7	Si-pnp	AF, 60V, 100mA, 150mW, B=300..600, 180MHz	SOT-323	16ta	-	3a	Nec
M7	-	2SA1622-7	Si-pnp	GP, 55V, 150mA, 150mW, 180MHz, B=300..600	MCP	16ta	-	3a	San
M7	-	2SA1836-7	Si-pnp	AF, 60V, 100mA, 200mW, B=300..600, >50MHz	SOT-416	16ta	-	3a	Nec
M7	-	2SA812-7	Si-pnp	GP, AF, 60V, 100mA, 200mW, B=300..600, 180MHz	SOT-23	16ta	-	3a	Nec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M7	-	2SA812A-7	Si-pnp	GP, AF, 60V, 100mA, 200mW, B=300..600, 180MHz	SOT-23	16ta	-	3a	Nec
M7	-	2SC5091F-R	Si-npn	VHF/UHF, LN, 20V, 40mA, 100mW, 10GHz, B=50..100	TESM	18ta	-	3a	Tos
M7	-	2SC5091-R	Si-npn	VHF/UHF, LN, 20V, 40mA, 100mW, 10GHz, B=50..100	SOT-323	16ta	-	3a	Tos
M7	-	AP8821N-47GC	Vdet-IC	4.7V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
M7	-	AP8821N-47GT	Vdet-IC	4.7V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
M7	-	AP8821N-47PC	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
M7	-	AP8821N-47PT	Vdet-IC	4.7V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
M7	-	BL8554CB3TR17	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M7	-	BSS67	Si-npn	Sw, 60V, 100mA, 330mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	Zx
M7	-	ELM7637LAB	Vdet-IC	3.7V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
M7	-	ILC5061IC27X	Vdet-IC	2.7V±2%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
M7	-	ILC5061M27X	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
M7	-	KST812-M7	Si-pnp	GP, 50V, 100mA, 350mW, B=300..600	SOT-23	16ta	-	3a	Sam
M7	-	MMBA812M7	Si-pnp	GP, 50V, 100mA, 350mW, B=300..600	SOT-23	16ta	-	3a	Sam
M7	-	R1100D171C	LVR-IC	µ-low Icc, 1.7V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
M7	-	R3111N472C	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
M7	-	TC54VN2702ECB	Vdet-IC	2.7V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
M7	cg	BL8554CB3TR37	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M7	ch	BL8554CB3TR27	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M7=	-	RT9818A-40GV	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
M73	-	XC61CN2702M	Vdet-IC	2.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
M73	-	XE61CN2745MR	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
M75	-	LN61FN2712M	Vdet-IC	2.7V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
M75	-	TC51N2702ECB	Vdet-IC	2.7V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
M75	-	XC61FN2712M	Vdet-IC	2.7V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
M75	-	XC61HN2712MR	Vdet-IC	2.7V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
M76	-	LN61FN2742M	Vdet-IC	2.7V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
M76	-	XC61FN2742M	Vdet-IC	2.7V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
M76	-	XC61HN2742MR	Vdet-IC	2.7V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
M77	-	LN61FN2752M	Vdet-IC	2.7V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
M77	-	XC61FN2752M	Vdet-IC	2.7V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
M77	-	XC61HN2752MR	Vdet-IC	2.7V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
M7A	-	ADM1817-20AKS	Vdet-IC	2.55V±2%, +Reset PPO	SOT-323	16vda	VD7	3a	Ad
M7A	-	ADM1817-20ART	Vdet-IC	2.55V±2%, +Reset PPO	SOT-23	16vda	VD7	3a	Ad
M7A	-	ILC5061AIC27X	Vdet-IC	2.7V±1%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
M7A	-	ILC5061AM27X	Vdet-IC	2.7V±1%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
M7B	-	ADM1817-R22AKS	Vdet-IC	2.18V±2%, +Reset PPO	SOT-323	16vda	VD7	3a	Ad
M7B	-	ADM1817-R22ART	Vdet-IC	2.18V±2%, +Reset PPO	SOT-23	16vda	VD7	3a	Ad
M7C	-	ADM1817-R23AKS	Vdet-IC	2.31V±2%, +Reset PPO	SOT-323	16vda	VD7	3a	Ad
M7C	-	ADM1817-R23ART	Vdet-IC	2.31V±2%, +Reset PPO	SOT-23	16vda	VD7	3a	Ad
M7E	-	ADM1817-10AKS	Vdet-IC	2.88V±2%, +Reset PPO	SOT-323	16vda	VD7	3a	Ad
M7E	-	ADM1817-10ART	Vdet-IC	2.88V±2%, +Reset PPO	SOT-23	16vda	VD7	3a	Ad
M7K	-	ADM1817-5AKS	Vdet-IC	3.06V±2%, +Reset PPO	SOT-323	16vda	VD7	3a	Ad
M7K	-	ADM1817-5ART	Vdet-IC	3.06V±2%, +Reset PPO	SOT-23	16vda	VD7	3a	Ad
M8	-	2SC5091F-O	Si-npn	VHF/UHF, LN, 20V, 40mA, 100mW, 10GHz, B=80..160	TESM	18ta	-	3a	Tos
M8	-	2SC5091-O	Si-npn	VHF/UHF, LN, 20V, 40mA, 100mW, 10GHz, B=80..160	SOT-323	16ta	-	3a	Tos
M8	-	AP8821N-48GC	Vdet-IC	4.8V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
M8	-	AP8821N-48GT	Vdet-IC	4.8V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
M8	-	AP8821N-48PC	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
M8	-	AP8821N-48PT	Vdet-IC	4.8V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
M8	-	BL8554CB3TR18	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M8	-	BSH103	n-MOSFET	V-MOS, LogL, 30V, 0.85A, <0.5Ω	SOT-23	16fh	-	3a	Phi
M8	-	BSS66R	Si-npn	Sw, 60V, 100mA, 330mW, B=50..150, >250MHz	SOT-23	16ta	-	3a	Zx
M8	-	BZX84C4V7	Z-diode	4.4..5.0V, Zzt=80Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
M8	-	ELM7638LAB	Vdet-IC	3.8V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
M8	-	ILC5061IC28X	Vdet-IC	2.8V±2%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
M8	-	ILC5061M28X	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
M8	-	R1100D181C	LVR-IC	µ-low Icc, 1.8V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
M8	-	R3111N482C	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
M8	-	TC54VN2802ECB	Vdet-IC	2.8V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
M8	cg	BL8554CB3TR38	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M8	ch	BL8554CB3TR28	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M81	-	FN1L3M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/4k7	SC-59	16ta	-	3a	Nec
M81	-	GN1L3M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/4k7	SOT-323	16ta	-	3a	Nec
M82	-	FN1L3N	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/10k	SC-59	16ta	-	3a	Nec
M82	-	GN1L3N	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/10k	SOT-323	16ta	-	3a	Nec
M83	-	FN1A3Q	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=1k/10k	SC-59	16ta	-	3a	Nec
M83	-	GN1A3Q	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=1k/10k	SOT-323	16ta	-	3a	Nec
M83	-	XC61CN2802M	Vdet-IC	2.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
M83	-	XE61CN2845MR	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M84	-	BF556A	n-FET	VHF Amp, osc, mix, 30V, 7mA, 250mW, Up<7.5V, 1GHz	SOT-23	16fa	-	3a	Phi
M85	-	BF556B	n-FET	VHF Amp, osc, mix, 30V, 13mA, 250mW, Up<7.5V, 1GHz	SOT-23	16fa	-	3a	Phi
M85	-	LN61FN2812M	Vdet-IC	2.8V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
M85	-	TC51N2802ECB	Vdet-IC	2.8V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
M85	-	XC61FN2812M	Vdet-IC	2.8V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
M85	-	XC61HN2812MR	Vdet-IC	2.8V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
M86	-	BF556C	n-FET	VHF Amp, osc, mix, 30V, 18mA, 250mW, Up<7.5V, 1GHz	SOT-23	16fa	-	3a	Phi
M86	-	LN61FN2842M	Vdet-IC	2.8V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
M86	-	XC61FN2842M	Vdet-IC	2.8V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
M86	-	XC61HN2842MR	Vdet-IC	2.8V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
M87	-	LN61FN2852M	Vdet-IC	2.8V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
M87	-	XC61FN2852M	Vdet-IC	2.8V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
M87	-	XC61HN2852MR	Vdet-IC	2.8V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
M8A	-	ADM1818-20AKS	Vdet-IC	2.55V±2%, -Reset ODO	SOT-323	16vda	VD6	3a	Ad
M8A	-	ADM1818-20ART	Vdet-IC	2.55V±2%, -Reset ODO	SOT-23	16vda	VD6	3a	Ad
M8A	-	ILC5061AIC28X	Vdet-IC	2.8V±1%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
M8A	-	ILC5061AM28X	Vdet-IC	2.8V±1%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
M8B	-	ADM1818-R22AKS	Vdet-IC	2.18V±2%, -Reset ODO	SOT-323	16vda	VD6	3a	Ad
M8B	-	ADM1818-R22ART	Vdet-IC	2.18V±2%, -Reset ODO	SOT-23	16vda	VD6	3a	Ad
M8C	-	ADM1818-R23AKS	Vdet-IC	2.31V±2%, -Reset ODO	SOT-323	16vda	VD6	3a	Ad
M8C	-	ADM1818-R23ART	Vdet-IC	2.31V±2%, -Reset ODO	SOT-23	16vda	VD6	3a	Ad
M8E	-	ADM1818-10AKS	Vdet-IC	2.88V±2%, -Reset ODO	SOT-323	16vda	VD6	3a	Ad
M8E	-	ADM1818-10ART	Vdet-IC	2.88V±2%, -Reset ODO	SOT-23	16vda	VD6	3a	Ad
M8K	-	ADM1818-5AKS	Vdet-IC	3.06V±2%, -Reset ODO	SOT-323	16vda	VD6	3a	Ad
M8K	-	ADM1818-5ART	Vdet-IC	3.06V±2%, -Reset ODO	SOT-23	16vda	VD6	3a	Ad
M8p	-	BSN20	n-MOSFET	Sw, LogL, 50V, 173mA, 830mW, 8/15ns, 15Ω(100mA)	SOT-23	16fh	-	3a	Phi
M8t	-	BSN20W	n-MOSFET	Sw, LogL, 50V, 100mA, 830mW, 8/15ns, 15Ω(100mA)	SOT-323	16fh	-	3a	Phi
M9	-	2SC5096F-R	Si-npn	VHF/UHF, LN, 20V, 15mA, 100mW, 10GHz, B=50..100	TESM	18ta	-	3a	Tos
M9	-	2SC5096-R	Si-npn	VHF/UHF, LN, 20V, 15mA, 100mW, 10GHz, B=50..100	SOT-323	16ta	-	3a	Tos
M9	-	AP8821N-49GC	Vdet-IC	4.9V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
M9	-	AP8821N-49GT	Vdet-IC	4.9V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
M9	-	AP8821N-49PC	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
M9	-	AP8821N-49PT	Vdet-IC	4.9V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
M9	-	BL8554CB3TR19	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M9	-	BSS67R	Si-npn	Sw, 60V, 100mA, 330mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	Zx
M9	-	BZX84C22	Z-diode	20.8..23.3V, Zzt=55Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
M9	-	ELM7639LAB	Vdet-IC	3.9V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
M9	-	ILC5061IC29X	Vdet-IC	2.9V±2%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
M9	-	ILC5061M29X	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
M9	-	R1100D191C	LVR-IC	µ-low Icc, 1.9V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
M9	-	R3111N492C	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
M9	-	TC54VN2902ECB	Vdet-IC	2.9V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
M9	cg	BL8554CB3TR39	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M9	ch	BL8554CB3TR29	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23	16cg	VR1	3ba	Shb
M9=	-	RT9198-16GV	LVR-IC	LDO, 1.6V±1%, 300mA	SOT-23	16cg	VR1	3a	Rct
M93	-	XC61CN2902M	Vdet-IC	2.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
M93	-	XE61CN2945MR	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
M95	-	LN61FN2912M	Vdet-IC	2.9V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
M95	-	TC51N2902ECB	Vdet-IC	2.9V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
M95	-	XC61FN2912M	Vdet-IC	2.9V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
M95	-	XC61HN2912MR	Vdet-IC	2.9V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
M96	-	LN61FN2942M	Vdet-IC	2.9V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
M96	-	XC61FN2942M	Vdet-IC	2.9V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
M96	-	XC61HN2942MR	Vdet-IC	2.9V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
M97	-	LN61FN2952M	Vdet-IC	2.9V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
M97	-	XC61FN2952M	Vdet-IC	2.9V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
M97	-	XC61HN2952MR	Vdet-IC	2.9V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
M9A	-	ILC5061AIC29X	Vdet-IC	2.9V±1%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
M9A	-	ILC5061AM29X	Vdet-IC	2.9V±1%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
ma	-	PT7M6238CLC3	Vdet-IC	3.8V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
ma	-	PT7M6238CLTA3	Vdet-IC	3.8V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
ma	cf	PT7M6238CLC3E	Vdet-IC	3.8V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
ma	cf	PT7M6238CLTA3E	Vdet-IC	3.8V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
mA	-	BU45L294G	Vdet-IC	2.9V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
Ma	-	BD49L35G	Vdet-IC	3.5V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
MA	-	2SC3011	Si-npn	UHF, C-Band, 20V, 30mA, 150mW, B=30..120, 6.5GHz	SC-59	16ta	-	3a	Tos
MA	-	2SC4392	Si-npn	UHF, 20V, 30mA, 6.5GHz	SOT-323	16ta	-	3a	Tos
MA	-	2SC5096F-O	Si-npn	VHF/UHF, LN, 20V, 15mA, 100mW, 10GHz, B=80..160	TESM	18ta	-	3a	Tos
MA	-	2SC5096-O	Si-npn	VHF/UHF, LN, 20V, 15mA, 100mW, 10GHz, B=80..160	SOT-323	16ta	-	3a	Tos
MA	-	2SC5536	Si-npn	VHF LN, 20V, 50mA, 100mW, B=80..200, 1.7GHz	SSFP	18ta	-	3a	San

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MA	-	BAS70WGP	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dc	-	3a	Chm
MA	-	DZ23C30	Z-diode	Dual, 28.0..32.0V, Izt=5mA, Zzt=35Ω, 300mW	SOT-23	16dg	-	3a	Lge
MA	-	ELM7640HDB	Vdet-IC	4.0V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
MA	-	FMMTA06R	Si-npn	AF, 80V, 500mA, 330mW, B>50, >100MHz	SOT-23	16te	-	3a	Zx
MA	-	M1MA151A	Si-diode	Sw, 40V, 100mA, 200mW, Vf<1.2V(100mA), <2pF	SC-59	16eb	-	3a	Ons
MA6	-	MMBD2838	Si-diode	Dual, Sw, 50V, 150mA, 225mW, Vf>1.2V(100mA), <4ns	SOT-23	16dg	-	3a	Ons
MAA	-	BC808-16	Si-npn	Sw, 30V, 800mA, 200mW, B=110..250, 100MHz	SOT-23	16ta	-	3a	Auk
MAA	-	BC808F-16	Si-pnp	Sw, 30V, 800mA, 200mW, B=110..250, 100MHz	SOT-23F	18ta	-	3a	Auk
MAB	-	BC808-25	Si-pnp	Sw, 30V, 800mA, 200mW, B=160..400, 100MHz	SOT-23	16ta	-	3a	Auk
MAB	-	BC808F-25	Si-pnp	Sw, 30V, 800mA, 200mW, B=160..400, 100MHz	SOT-23F	18ta	-	3a	Auk
MAC	-	BC808-40	Si-pnp	Sw, 30V, 800mA, 200mW, B=250..630, 100MHz	SOT-23	16ta	-	3a	Auk
MAC	-	BC808F-40	Si-pnp	Sw, 30V, 800mA, 200mW, B=250..630, 100MHz	SOT-23F	18ta	-	3a	Auk
MAO	-	2SC5064-O	Si-npn	VHF/UHF, LN, 20V, 30mA, 150mW, 7GHz, B=80..160	SC-59	16ta	-	3a	Tos
MAO	-	2SC5065-O	Si-npn	VHF/UHF, LN, 20V, 30mA, 100mW, 7GHz, B=80..160	SOT-323	16ta	-	3a	Tos
MAY	-	2SC5064-Y	Si-npn	VHF/UHF, LN, 20V, 30mA, 150mW, 7GHz, B=120..240	SC-59	16ta	-	3a	Tos
MAY	-	2SC5065-Y	Si-npn	VHF/UHF, LN, 20V, 30mA, 100mW, 7GHz, B=120..240	SOT-323	16ta	-	3a	Tos
mb	-	PT7M6238CHC3	Vdet-IC	3.8V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
mb	-	PT7M6238CHTA3	Vdet-IC	3.8V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
mb	cf	PT7M6238CHC3E	Vdet-IC	3.8V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
mb	cf	PT7M6238CHTA3E	Vdet-IC	3.8V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
mB	-	BU45L304G	Vdet-IC	3.0V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
Mb	-	BD49L36G	Vdet-IC	3.6V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
MB	-	2SA1052-B	Si-pnp	GP, AF, 30V, 100mA, 150mW, B=100..200	SOT-23	16ta	-	3a	Ren
MB	-	2SC3098	Si-npn	UHF, C-Band, 30V, 50mA, 150mW, B=30..300, 3.5GHz	SC-59	16ta	-	3a	Tos
MB	-	2SC5108-O	Si-npn	VHF/UHF-VCO, 20V, 30mA, 100mW, 6GHz, B=80..160	SOT-323	16ta	-	3a	Tos
MB	-	BAS70WAGP	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16df	-	3a	Chm
MB	-	DZ23C33	Z-diode	Dual, 31.0..35.0V, Izt=5mA, Zzt=40Ω, 300mW	SOT-23	16dg	-	3a	Lge
MB	-	ELM7641HDB	Vdet-IC	4.1V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
MB	-	FMMTA56R	Si-pnp	AF-Drv, 80V, 500mA, 330mW, B>50, >100MHz	SOT-23	16te	-	3a	Zx
MB	-	M1MA152A	Si-diode	Sw, 80V, 100mA, 200mW, Vf<1.2V(100mA), <2pF	SC-59	16eb	-	3a	Ons
MB	-	MBT3904DW9	Si-npn	GP, 60V, 200mA, 250mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	Mot
MB=	-	RT9818G-30GVL	Vdet-IC	3.0V±1.5%, +Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
mc	-	PT7M6238NLC3	Vdet-IC	3.8V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
mc	-	PT7M6238NLTA3	Vdet-IC	3.8V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
mc	cf	PT7M6238NLC3E	Vdet-IC	3.8V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
mc	cf	PT7M6238NLTA3E	Vdet-IC	3.8V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
mC	-	BU45L314G	Vdet-IC	3.1V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
Mc	-	BD49L37G	Vdet-IC	3.7V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
MC	-	2SA1052-C	Si-pnp	GP, AF, 30V, 100mA, 150mW, B=160..320	SOT-23	16ta	-	3a	Ren
MC	-	2SC3099	Si-npn	VHF/UHF, LN, 20V, 30mA, 150mW, B=30..250, 4GHz	SOT-23	16ta	-	3a	Tos
MC	-	2SC5108-Y	Si-npn	VHF/UHF-VCO, 20V, 30mA, 100mW, 6GHz, B=120..240	SOT-323	16ta	-	3a	Tos
MC	-	BAS70WCGP	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dg	-	3a	Chm
MC	-	DZ23C36	Z-diode	Dual, 34.0..38.0V, Izt=5mA, Zzt=40Ω, 300mW	SOT-23	16dg	-	3a	Lge
MC	-	ELM7642HDB	Vdet-IC	4.2V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
MC	-	MA3J143	Si-diode	Dual, Fast, Sw, 40V, 100mA, Vf<1.2V(100mA), <9ns	SOT-523F	18dl	-	3a	Pan
MCO	-	2SC5084-O	Si-npn	VHF/UHF, LN, 20V, 80mA, 150mW, 7GHz, B=80..160	SC-59	16ta	-	3a	Tos
MCO	-	2SC5085-O	Si-npn	VHF/UHF, LN, 20V, 80mA, 100mW, 7GHz, B=80..160	SOT-323	16ta	-	3a	Tos
MCs	-	BFS17P	Si-npn	VHF.UHF, 25V, 25mA, 280mW, B=20..150, 2.5GHz	SOT-23	16ta	-	3a	Sie
MCY	-	2SC5084-Y	Si-npn	VHF/UHF, LN, 20V, 80mA, 150mW, 7GHz, B=120..240	SC-59	16ta	-	3a	Tos
MCY	-	2SC5085-Y	Si-npn	VHF/UHF, LN, 20V, 80mA, 100mW, 7GHz, B=120..240	SOT-323	16ta	-	3a	Tos
md	-	PT7M6239CLC3	Vdet-IC	3.9V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
md	-	PT7M6239CLTA3	Vdet-IC	3.9V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
md	cf	PT7M6239CLC3E	Vdet-IC	3.9V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
md	cf	PT7M6239CLTA3E	Vdet-IC	3.9V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
mD	-	BU45L324G	Vdet-IC	3.2V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
Md	-	BD49L38G	Vdet-IC	3.8V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
MD	-	2SA1052-D	Si-pnp	GP, AF, 30V, 100mA, 150mW, B=240.500	SOT-23	16ta	-	3a	Ren
MD	-	2SA1245	Si-pnp	UHF, 15V, 30mA, 150mW, B>20, 4GHz	SC-59	16ta	-	3a	Tos
MD	-	2SC5111FT-O	Si-npn	VHF/UHF-VCO, 20V, 60mA, 100mW, 6GHz, B=80..160	TESM	18ta	-	3a	Tos
MD	-	2SC5111-O	Si-npn	VHF/UHF-VCO, 20V, 60mA, 100mW, 6GHz, B=80..160	SOT-323	16ta	-	3a	Tos
MD	-	BAS70WSGP	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323	16dl	-	3a	Chm
MD	-	DDZX9707	Z-diode	20V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
MD	-	DZ23C39	Z-diode	Dual, 37.0..41.0V, Izt=5mA, Zzt=50Ω, 300mW	SOT-23	16dg	-	3a	Lge
MD	-	ELM7643HDB	Vdet-IC	4.3V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
MDO	-	2SC5089-O	Si-npn	VHF/UHF, LN, 20V, 40mA, 150mW, 10GHz, B=80..160	SC-59	16ta	-	3a	Tos
MDO	-	2SC5090-O	Si-npn	VHF/UHF, LN, 20V, 40mA, 100mW, 10GHz, B=80..160	SOT-323	16ta	-	3a	Tos
MDR	-	2SC5089-R	Si-npn	VHF/UHF, LN, 20V, 40mA, 150mW, 10GHz, B=50..100	SC-59	16ta	-	3a	Tos
MDR	-	2SC5090-R	Si-npn	VHF/UHF, LN, 20V, 40mA, 100mW, 10GHz, B=50..100	SOT-323	16ta	-	3a	Tos
me	-	PT7M6239CHC3	Vdet-IC	3.9V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
me	-	PT7M6239CHTA3	Vdet-IC	3.9V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
me	cf	PT7M6239CHC3E	Vdet-IC	3.9V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
me	cf	PT7M6239CHTA3E	Vdet-IC	3.9V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
mE	-	BU45L334G	Vdet-IC	3.3V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
Me	-	BD49L39G	Vdet-IC	3.9V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
ME	-	2SA1235-E	Si-pnp	AF-Amp, 50V, 150mA, 200mW, 200MHz, B=150..300	SC-59	16ta	-	3a	Mit
ME	-	2SA1602-E	Si-pnp	AF, 50V, 200mA, 150mW, 200MHz, B=150..300	SOT-323	16ta	-	3a	Mit
ME	-	2SC3429	Si-npn	UHF/VHF, 17V, 70mA, 150mW, 5GHz, B>25	SOT-23	16ta	-	3a	Tos
ME	-	2SC4393	Si-npn	VHF/UHF, 17V, 70mA, 100mW, B>25, 5GHz	SOT-323	16ta	-	3a	Tos
ME	-	2SC5111FT-Y	Si-npn	VHF/UHF-VCO, 20V, 60mA, 100mW, 6GHz, B=120..240	TESM	18ta	-	3a	Tos
ME	-	2SC5111-Y	Si-npn	VHF/UHF-VCO, 20V, 60mA, 100mW, 6GHz, B=120..240	SOT-323	16ta	-	3a	Tos
ME	-	BAS40WGP	Si-diode	SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-323	16dc	-	3a	Chm
ME	-	DDZX9708	Z-diode	22V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
ME	-	DZ23C43	Z-diode	Dual, 40.0..46.0V, Izt=5mA, Zzt=60Ω, 300mW	SOT-23	16dg	-	3a	Lge
ME	-	ELM7644HDB	Vdet-IC	4.4V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
ME	-	LM4040D25IDC	Vref-IC	µPower, Precision, Shunt, 2.50V±1%	SC-70	16dk	RF1	3d	Ti
ME=	-	RT9818A-34GV	Vdet-IC	3.4V±1.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Rct
MEO	-	2SC5094-O	Si-npn	VHF/UHF, LN, 20V, 15mA, 150mW, 10GHz, B=80..160	SC-59	16ta	-	3a	Tos
MEO	-	2SC5095-O	Si-npn	VHF/UHF, LN, 20V, 15mA, 100mW, 10GHz, B=80..160	SOT-323	16ta	-	3a	Tos
MER	-	2SC5094-R	Si-npn	VHF/UHF, LN, 20V, 15mA, 150mW, 10GHz, B=50..100	SC-59	16ta	-	3a	Tos
MER	-	2SC5095-R	Si-npn	VHF/UHF, LN, 20V, 15mA, 100mW, 10GHz, B=50..100	SOT-323	16ta	-	3a	Tos
mf	-	PT7M6239NLC3	Vdet-IC	3.9V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
mf	-	PT7M6239NLTA3	Vdet-IC	3.9V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
mf	cf	PT7M6239NLC3E	Vdet-IC	3.9V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
mf	cf	PT7M6239NLTA3E	Vdet-IC	3.9V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
mF	-	BU45L344G	Vdet-IC	3.4V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
Mf	-	BD49L40G	Vdet-IC	4.0V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
MF	-	2SA1235-F	Si-pnp	AF-Amp, 50V, 150mA, 200mW, 200MHz, B=250..500	SC-59	16ta	-	3a	Mit
MF	-	2SA1602-F	Si-pnp	AF, 50V, 200mA, 150mW, 200MHz, B=250..500	SOT-323	16ta	-	3a	Mit
MF	-	2SC3445	Si-npn	UHF, 15V, 80mA, 150mW, B=30..200, 7GHz	SOT-23	16ta	-	3a	Tos
MF	-	BAS40WAGP	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-323	16df	-	3a	Chm
MF	-	DDZX9709	Z-diode	24V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
MF	-	DZ23C47	Z-diode	Dual, 44.0..50.0V, Izt=5mA, Zzt=70Ω, 300mW	SOT-23	16dg	-	3a	Lge
MF	-	ELM7645HDB	Vdet-IC	4.5V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
MFO	-	2SC5106-O	Si-npn	VHF/UHF-VCO, 20V, 30mA, 150mW, 6GHz, B=80..160	SC-59	16ta	-	3a	Tos
MFO	-	2SC5107-O	Si-npn	VHF/UHF-VCO, 20V, 30mA, 100mW, 6GHz, B=80..160	SOT-323	16ta	-	3a	Tos
MFY	-	2SC5106-Y	Si-npn	VHF/UHF-VCO, 20V, 30mA, 150mW, 6GHz, B=120..240	SC-59	16ta	-	3a	Tos
MFY	-	2SC5107-Y	Si-npn	VHF/UHF-VCO, 20V, 30mA, 100mW, 6GHz, B=120..240	SOT-323	16ta	-	3a	Tos
mg	-	PT7M6240CLC3	Vdet-IC	4.0V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
mg	-	PT7M6240CLTA3	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
mg	cf	PT7M6240CLC3E	Vdet-IC	4.0V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
mg	cf	PT7M6240CLTA3E	Vdet-IC	4.0V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
mG	-	BU45L354G	Vdet-IC	3.5V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
Mg	-	BD49L41G	Vdet-IC	4.1V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
MG	-	2SA1235-G	Si-pnp	AF-Amp, 50V, 150mA, 200mW, 200MHz, B=400..800	SC-59	16ta	-	3a	Mit
MG	-	2SA1602-G	Si-pnp	AF, 50V, 200mA, 150mW, 200MHz, B=400..800	SOT-323	16ta	-	3a	Mit
MG	-	BAS40WCGP	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-323	16dg	-	3a	Chm
MG	-	ELM7646HDB	Vdet-IC	4.6V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
MGO	-	2SC5109-O	Si-npn	VHF/UHF-VCO, 20V, 60mA, 150mW, 6GHz, B=80..160	SC-59	16ta	-	3a	Tos
MGO	-	2SC5110-O	Si-npn	VHF/UHF-VCO, 20V, 60mA, 100mW, 6GHz, B=80..160	SOT-323	16ta	-	3a	Tos
MGY	-	2SC5109-Y	Si-npn	VHF/UHF-VCO, 20V, 60mA, 150mW, 6GHz, B=120..240	SC-59	16ta	-	3a	Tos
MGY	-	2SC5110-Y	Si-npn	VHF/UHF-VCO, 20V, 60mA, 100mW, 6GHz, B=120..240	SOT-323	16ta	-	3a	Tos
mh	-	PT7M6240CHC3	Vdet-IC	4.0V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
mh	-	PT7M6240CHTA3	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
mh	cf	PT7M6240CHC3E	Vdet-IC	4.0V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
mh	cf	PT7M6240CHTA3E	Vdet-IC	4.0V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
mH	-	BU45L364G	Vdet-IC	3.6V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
Mh	-	BD49L42G	Vdet-IC	4.2V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
MH	-	2SC3606	Si-npn	VHF/UHF, LN, 20V, 80mA, 150mW, 7GHz, B=30..250	SC-59	16ta	-	3a	Tos
MH	-	2SC4394	Si-npn	VHF/UHF, 20V, 80mA, 100mW, B=30..250, 7GHz	SOT-323	16ta	-	3a	Tos
MH	-	2SC4839	Si-npn	VHF/UHF, LN, 20V, 80mA, 100mW, 7GHz, B=30..250	SOT-323	16ta	-	3a	Tos
MH	-	BAS40WSGP	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-323	16dl	-	3a	Chm
MH	-	DDZX9711	Z-diode	27V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
MH	-	DZ23C51	Z-diode	Dual, 48.0..54.0V, Izt=5mA, Zzt=70Ω, 300mW	SOT-23	16dg	-	3a	Lge
MH	-	ELM7647HDB	Vdet-IC	4.7V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
MH	-	M1MA141K	Si-diode	Sw, 40V, 100mA, 150mW, Vf<1.2V(100mA), <2pF	SOT-323	16dc	-	3a	Ons
MH	-	M1MA151K	Si-diode	Sw, 40V, 100mA, 200mW, Vf<1.2V(100mA), <2pF	SC-59	16dc	-	3a	Ons
mi	-	PT7M6240NLC3	Vdet-IC	4.0V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
mi	-	PT7M6240NLTA3	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
mi	cf	PT7M6240NLC3E	Vdet-IC	4.0V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
mi	cf	PT7M6240NLTA3E	Vdet-IC	4.0V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MI	-	CH751WPT	Si-diode	SBD, 40V, 30mA, Vf<0.37V(1mA)	SOT-323	16dc	-	3a	Chm
MI	-	M1MA142K	Si-diode	Sw, 80V, 100mA, 150mW, Vf<1.2V(100mA), <2pF	SOT-323	16dc	-	3a	Ons
MI	-	M1MA152K	Si-diode	Sw, 80V, 100mA, 200mW, Vf<1.2V(100mA), <2pF	SC-59	16dc	-	3a	Ons
mj	-	PT7M6241CLC3	Vdet-IC	4.1V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
mj	-	PT7M6241CLTA3	Vdet-IC	4.1V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
mj	cf	PT7M6241CLC3E	Vdet-IC	4.1V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
mj	cf	PT7M6241CLTA3E	Vdet-IC	4.1V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
MJ	-	2SK1849	n-MOSFET	Sw, 100V, 250mA, 250mW, <4.2Ω(100mA), 5/40ns	SOT-23	16fh	-	3a	San
MJ	-	2SK2273	n-MOSFET	Sw, 20V, 500mA, 250mW, <0.75Ω(250mA), 8/35ns	SOT-23	16fh	-	3a	San
MJ	-	DDZX9712	Z-diode	28V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
MJ	-	ELM7648HDB	Vdet-IC	4.8V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
MJ1	-	MMBD355	Si-diode	Dual, UHF-Mix, 7V, 10mA, Vf<0.6V(10mA), <1pF	SOT-23	16df	-	3a	Ons
mk	-	PT7M6241CHC3	Vdet-IC	4.1V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
mk	-	PT7M6241CHTA3	Vdet-IC	4.1V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
mk	cf	PT7M6241CHC3E	Vdet-IC	4.1V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
mk	cf	PT7M6241CHTA3E	Vdet-IC	4.1V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
mK	-	BU45L374G	Vdet-IC	3.7V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
Mk	-	BD49L43G	Vdet-IC	4.3V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
MK	-	DDZX9713	Z-diode	30V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
MK	-	ELM7649HDB	Vdet-IC	4.9V±2%, +Reset PPO, 50ms	SOT-23	16vdc	VD7	3d	Elm
ml	-	PT7M6241NLC3	Vdet-IC	4.1V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
ml	-	PT7M6241NLTA3	Vdet-IC	4.1V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
ml	cf	PT7M6241NLC3E	Vdet-IC	4.1V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
ml	cf	PT7M6241NLTA3E	Vdet-IC	4.1V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
ML	-	2SA1519	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=4k7/4k7	SOT-23	16ta	-	3a	San
ML	-	CH751WSPT	Si-diode	Dual, SBD, 40V, 30mA, Vf<0.37V(1mA)	SOT-323	16dl	-	3a	Chm
ML	-	DDZX9714	Z-diode	33V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
ML	-	ZVP3306F	p-MOSFET	V-MOS, 60V, 0.09A, 0.625W, <14Ω(0.5A)	SOT-23	16fh	-	3a	Zx
mm	-	PT7M6242CLC3	Vdet-IC	4.2V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
mm	-	PT7M6242CLTA3	Vdet-IC	4.2V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
mm	cf	PT7M6242CLC3E	Vdet-IC	4.2V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
mm	cf	PT7M6242CLTA3E	Vdet-IC	4.2V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
mM	-	BU45L384G	Vdet-IC	3.8V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
Mm	-	BD49L44G	Vdet-IC	4.4V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
MM	-	DDZX9715	Z-diode	36V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
mn	-	PT7M6242CHC3	Vdet-IC	4.2V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
mn	-	PT7M6242CHTA3	Vdet-IC	4.2V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
mn	cf	PT7M6242CHC3E	Vdet-IC	4.2V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
mn	cf	PT7M6242CHTA3E	Vdet-IC	4.2V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
mN	-	BU45L394G	Vdet-IC	3.9V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
Mn	-	BD49L45G	Vdet-IC	4.5V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
MN	-	2SC4840	Si-npn	VHF-UHF, LN, 20V, 40mA, 100mW, B=50..250, 10GHz	2-2H1A	16ta	-	3a	Tos
MN	-	2SC5490	Si-npn	UHF-S-band, LN, 20V, 30mA, 100mW, B=90..200, 11GHz	SSFP	18ta	-	3a	San
MN	-	DDZX9716	Z-diode	39V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
MN	-	M1MA141WA	Si-diode	Dual, Sw, 40V, 100mA, 150mW, Vf<1.2V(100mA), <15pF	SOT-323	16df	-	3a	Ons
MN	-	M1MA151WA	Si-diode	Dual, Sw, 40V, 100mA, 200mW, Vf<1.2V(100mA), <15pF	SC-59	16df	-	3a	Ons
MN2	-	DMN2104L	n-MOSFET	Sw, 20V, 4.3A, 1.4W, 53mΩ(4.2A), 92pF	SOT-23	16fh	-	3c	Di
MN3	-	2SC5245-3	Si-npn	UHF-S-band, 20V, 30mA, 150mW, B=60..120, 11GHz	MCP	16ta	-	3a	San
MN3	-	2SC5275-3	Si-npn	UHF-S-band, 20V, 30mA, 200mW, B=60..120, 11GHz	SOT-23	16ta	-	3a	San
MN4	-	2SC5245-4	Si-npn	UHF-S-band, 20V, 30mA, 150mW, B=90..180, 11GHz	MCP	16ta	-	3a	San
MN4	-	2SC5275-4	Si-npn	UHF-S-band, 20V, 30mA, 200mW, B=90..180, 11GHz	SOT-23	16ta	-	3a	San
MN5	-	2SC5245-5	Si-npn	UHF-S-band, 20V, 30mA, 150mW, B=135..270, 11GHz	MCP	16ta	-	3a	San
MN5	-	2SC5275-5	Si-npn	UHF-S-band, 20V, 30mA, 200mW, B=135..270, 11GHz	SOT-23	16ta	-	3a	San
mo	-	PT7M6242NLC3	Vdet-IC	4.2V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
mo	-	PT7M6242NLTA3	Vdet-IC	4.2V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
mo	cf	PT7M6242NLC3E	Vdet-IC	4.2V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
mo	cf	PT7M6242NLTA3E	Vdet-IC	4.2V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
MO	-	2SC4322	Si-npn	VHF/UHF, LN, 20V, 15mA, 150mW, 10GHz, B=50..250	SC-59	16ta	-	3a	Tos
MO	-	2SC4841	Si-npn	VHF-UHF, LN, 20V, 15mA, 100mW, B=50..250, 10GHz	2-2H1A	16ta	-	3a	Tos
MO	-	BAW56WPT	Si-diode	Dual, Sw, 85V, 150mA, Vf<1.25V(150mA), 4ns	SOT-323	16df	-	3a	Chm
MO	-	CHP202UPT	Si-diode	Dual, Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	SOT-323	16df	-	3a	Chm
MO	-	DDZX9717	Z-diode	43V±5%, If=10mA, 500mW	SOT-23	16dc	-	3c	Di
MO	-	M1MA142WA	Si-diode	Dual, Swi, 80V, 100mA, 150mW, Vf<1.2V(100mA), <15pF	SOT-323	16df	-	3a	Ons
MO	-	M1MA152WA	Si-diode	Dual, Sw, 80V, 100mA, 200mW, Vf<1.2V(100mA), <15pF	SC-59	16df	-	3a	Ons
MO	-	MA3X152D	Si-diode	Dual, Sw, 80V, 100mA, <10ns, 15pF	SOT-23	16df	-	3a	Pan
mp	-	PT7M6243CLC3	Vdet-IC	4.3V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
mp	-	PT7M6243CLTA3	Vdet-IC	4.3V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
mp	cf	PT7M6243CLC3E	Vdet-IC	4.3V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
mp	cf	PT7M6243CLTA3E	Vdet-IC	4.3V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
mP	-	BU45L404G	Vdet-IC	4.0V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Mp	-	BD49L46G	Vdet-IC	4.6V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
MP	-	2SC4470	Si-npn	UHF, 20V, 80mA, 7GHz	SOT-23	16te	-	3a	Tos
MP	-	MA3J143A	Si-diode	Dual, Fast, Sw, 80V, 100mA, Vf<1.2V(100mA), <9ns	SOT-523F	18dl	-	3a	Pan
MP=	-	RT9818C-36GVL	Vdet-IC	4.6V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vdc	VD6	3a	Rct
mq	-	PT7M6243CHC3	Vdet-IC	4.3V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
mq	-	PT7M6243CHTA3	Vdet-IC	4.3V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
mq	cf	PT7M6243CHC3E	Vdet-IC	4.3V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
mq	cf	PT7M6243CHTA3E	Vdet-IC	4.3V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
MQ	-	KRC281U	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=350..1200, R1=2.2k	SOT-323	16ta	-	3f	Kec
MQ=	-	RT9818C-41GVL	Vdet-IC	4.1V±1.5%, -Reset ODO, Td=220ms	SOT-23	16vdc	VD6	3a	Rct
MQA	-	KRC281SA	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=200..700, R1=2.2k	SOT-23	16ta	-	3f	Kec
MQB	-	KRC281SB	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=350..1200, R1=2.2k	SOT-23	16ta	-	3f	Kec
mr	-	PT7M6243NLC3	Vdet-IC	4.3V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
mr	-	PT7M6243NLTA3	Vdet-IC	4.3V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
mr	cf	PT7M6243NLC3E	Vdet-IC	4.3V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
mr	cf	PT7M6243NLTA3E	Vdet-IC	4.3V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
mR	-	BU45L414G	Vdet-IC	4.1V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
Mr	-	BD49L47G	Vdet-IC	4.7V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
MR	-	CAT809MSDI-GT3	Vdet-IC	4.38V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3d	Ons
MR	-	CAT809MTBI-GT3	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
MR	-	KRC282U	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=350..1200, R1=4.7k	SOT-323	16ta	-	3f	Kec
MR	-	MT3S03AS	Si-npn	VHF/UHF, 10V, 40mA, 10GHz	SOT-23	16ta	-	3a	Tos
MR	-	ZVP3310F	p-MOSFET	V-MOS, 100V, 0.14A, 0.175W, <20Ω(0.15A)	SOT-23	16fh	-	3a	Zx
MR=	-	RT9818G-20GVL	Vdet-IC	2.0V±1.5%, +Reset ODO, Td=220ms	SOT-23	16vda	VD6	3a	Rct
MRA	-	KRC282SA	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=200..700, R1=4.7k	SOT-23	16ta	-	3f	Kec
MRB	-	KRC282SB	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=350..1200, R1=4.7k	SOT-23	16ta	-	3f	Kec
ms	-	PT7M6244CLC3	Vdet-IC	4.4V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
ms	-	PT7M6244CLTA3	Vdet-IC	4.4V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
ms	cf	PT7M6244CLC3E	Vdet-IC	4.4V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
ms	cf	PT7M6244CLTA3E	Vdet-IC	4.4V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
mS	-	BU45L424G	Vdet-IC	4.2V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
MS	-	CAT810MSDI-GT3	Vdet-IC	4.38V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3d	Ons
MS	-	CAT810MTBI-GT3	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ons
MS	-	KRC283U	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=350..1200, R1=5.6k	SOT-323	16ta	-	3f	Kec
MS	-	LM4040A20IDC	Vref-IC	µPower, Precision, Shunt, 2.048V±0.1%	SC-70	16dk	RF1	3d	Ti
MS=	-	RT9818E-20GVL	Vdet-IC	2.0V±1.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Rct
MS1	-	2SA1963-1	Si-pnp	HF, LN, U-Sp, Sw, 12V, 50mA, 200mW, B=20..50, 5GHz	SOT-23	16ta	-	3a	San
MS2	-	2SA1963-2	Si-pnp	HF, LN, U-Sp, Sw, 12V, 50mA, 200mW, B=40..80, 5GHz	SOT-23	16ta	-	3a	San
MS3	-	2SA1963-3	Si-pnp	HF, LN, U-Sp, Sw, 12V, 50mA, 200mW, B=60..120, 5GHz	SOT-23	16ta	-	3a	San
MSA	-	KRC283SA	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=200..700, R1=5.6k	SOT-23	16ta	-	3f	Kec
MSB	-	KRC283SB	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=350..1200, R1=5.6k	SOT-23	16ta	-	3f	Kec
mt	-	PT7M6244CHC3	Vdet-IC	4.4V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
mt	-	PT7M6244CHTA3	Vdet-IC	4.4V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
mt	cf	PT7M6244CHC3E	Vdet-IC	4.4V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
mt	cf	PT7M6244CHTA3E	Vdet-IC	4.4V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
mT	-	BU45L434G	Vdet-IC	4.3V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
MT	-	CHT817PT-S	Si-npn	AF, Sw, 45V, 500mA, B=250..600, 170MHz	SOT-23	16ta	-	3a	Chm
MT	-	KRC284U	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=350..1200, R1=6.8k	SOT-323	16ta	-	3f	Kec
MT	-	LM4040B20IDC	Vref-IC	µPower, Precision, Shunt, 2.048V±0.2%	SC-70	16dk	RF1	3d	Ti
MT	-	M1MA141WK	Si-diode	Dual, Sw, 40V, 100mA, 150mW, Vf<1.2V(100mA), <15pF	SOT-323	16dg	-	3a	Ons
MT	-	M1MA151WK	Si-diode	Dual, Sw, 40V, 100mA, 200mW, Vf<1.2V(100mA), <15pF	SC-59	16dg	-	3a	Ons
MT	-	ZVP1320F	p-MOSFET	V-MOS, 200V, 35mA, 0.625W, <80Ω(50mA)	SOT-23	16fh	-	3a	Zx
MTA	-	KRC284SA	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=200..700, R1=6.8k	SOT-23	16ta	-	3f	Kec
MTB	-	KRC284SB	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=350..1200, R1=6.8k	SOT-23	16ta	-	3f	Kec
MTT	-	ADM1812-10AKS	Vdet-IC	4.35V±2%, +Reset PPO	SOT-323	16vda	VD7	3a	Ad
MTT	-	ADM1812-10ART	Vdet-IC	4.35V±2%, +Reset PPO	SOT-23	16vda	VD7	3a	Ad
MTV	-	ADM1812-5AKS	Vdet-IC	4.62V±2%, +Reset PPO	SOT-323	16vda	VD7	3a	Ad
MTV	-	ADM1812-5ART	Vdet-IC	4.62V±2%, +Reset PPO	SOT-23	16vda	VD7	3a	Ad
mu	-	PT7M6244NLC3	Vdet-IC	4.4V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
mu	-	PT7M6244NLTA3	Vdet-IC	4.4V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
mu	cf	PT7M6244NLC3E	Vdet-IC	4.4V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
mu	cf	PT7M6244NLTA3E	Vdet-IC	4.4V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
MU	-	BAV70WPT	Si-diode	Dual, Sw, 75V, 150mA, Vf<1.25V(150mA), 4ns	SOT-323	16dg	-	3a	Chm
MU	-	CHN202UPT	Si-diode	Dual, Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	SOT-323	16dg	-	3a	Chm
MU	-	KRC285U	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=350..1200, R1=10k	SOT-323	16ta	-	3f	Kec
MU	-	M1MA142WK	Si-diode	Dual, Sw, 80V, 100mA, 150mW, Vf<1.2V(100mA), <15pF	SOT-323	16dg	-	3a	Ons
MU	-	M1MA152WK	Si-diode	Dual, Sw, 80V, 100mA, 200mW, Vf<1.2V(100mA), <15pF	SC-59	16dg	-	3a	Ons
MU=	-	RT9818D-35GV	Vdet-IC	3.5V±1.5%, -Reset ODO, Td=450ms	SOT-23	16vda	VD6	3a	Rct
MUA	-	KRC285SA	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=200..700, R1=10k	SOT-23	16ta	-	3f	Kec
MUB	-	KRC285SB	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=350..1200, R1=10k	SOT-23	16ta	-	3f	Kec

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
mv	-	PT7M6245CLC3	Vdet-IC	4.5V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
mv	-	PT7M6245CLTA3	Vdet-IC	4.5V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
mv	cf	PT7M6245CLC3E	Vdet-IC	4.5V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
mv	cf	PT7M6245CLTA3E	Vdet-IC	4.5V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
MV	-	1SV272	PIN-diode	VHF/UHF, 50V, 100mA, 0.6pF, 0.5Ω(470MHz)	SOT-23	16dc	-	3a	San
MV	-	KRC286U	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=350..1200, R1=22k	SOT-323	16ta	-	3f	Kec
MV	-	LM4040C20IDC	Vref-IC	µPower, Precision, Shunt, 2.048V±0.5%	SC-70	16dk	RF1	3d	Ti
MVA	-	KRC286SA	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=200..700, R1=22k	SOT-23	16ta	-	3f	Kec
MVB	-	KRC286SB	Si-npn-Digi	Sw, 50V, 300mA, 900mW, 300MHz, B=350..1200, R1=22k	SOT-23	16ta	-	3f	Kec
mw	-	PT7M6245CHC3	Vdet-IC	4.5V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
mw	-	PT7M6245CHTA3	Vdet-IC	4.5V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
mw	cf	PT7M6245CHC3E	Vdet-IC	4.5V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
mw	cf	PT7M6245CHTA3E	Vdet-IC	4.5V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
mW	-	BU45L444G	Vdet-IC	4.4V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
MW	-	LM4040D20IDC	Vref-IC	µPower, Precision, Shunt, 2.048V±1%	SC-70	16dk	RF1	3d	Ti
mx	-	PT7M6245NLC3	Vdet-IC	4.5V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
mx	-	PT7M6245NLTA3	Vdet-IC	4.5V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
mx	cf	PT7M6245NLC3E	Vdet-IC	4.5V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
mx	cf	PT7M6245NLTA3E	Vdet-IC	4.5V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
mX	-	BU45L454G	Vdet-IC	4.5V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
MX	-	LM4040B50IDC	Vref-IC	µPower, Precision, Shunt, 5.00V±0.2%	SC-70	16dk	RF1	3d	Ti
MX	-	MA3X057	C-diode	VHF-Band-Sw, 35V, 100mA, 1.3pF(15V), 0.78Ω(100MHz)	SC-59	16dc	-	3a	Pan
MX	-	MA57	C-diode	VHF-Band-Sw, 35V, 100mA, 1.3pF(15V), 0.78Ω(100MHz)	SC-59	16dc	-	3a	Pan
my	-	PT7M6246CLC3	Vdet-IC	4.6V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
my	-	PT7M6246CLTA3	Vdet-IC	4.6V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
my	cf	PT7M6246CLC3E	Vdet-IC	4.6V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
my	cf	PT7M6246CLTA3E	Vdet-IC	4.6V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
mY	-	BU45L464G	Vdet-IC	4.6V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
My	-	BD49L48G	Vdet-IC	4.8V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
MY	-	MA3X551	PIN-diode	UHF/SHF-AGC, 40V, 100mA, Vf=1V(100mA), 0.3pF	SC-59	16dc	-	3a	Pan
MY	-	MA3Z551	PIN-diode	HF-att, 40V, 100mA, 150mW, Vf=1V(100mA), 0.3pF	SOT-323	16dc	-	3a	Pan
MY	-	MA551	PIN-diode	UHF/SHF-AGC, 40V, 100mA, Vf=1V(100mA), 0.3pF	SC-59	16dc	-	3a	Pan
MY2	-	2SC3773-2	Si-npn	UHF, Osc-Mix, 25V, 50mA, 250mW, 3.5GHz, B=40..80	SOT-23	16ta	-	3a	San
MY3	-	2SC3773-3	Si-npn	UHF, Osc-Mix, 25V, 50mA, 250mW, 3.5GHz, B=60..120	SOT-23	16ta	-	3a	San
MY4	-	2SC3773-4	Si-npn	UHF, Osc-Mix, 25V, 50mA, 250mW, 3.5GHz, B=100..200	SOT-23	16ta	-	3a	San
mz	-	PT7M6246CHC3	Vdet-IC	4.6V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
mz	-	PT7M6246CHTA3	Vdet-IC	4.6V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
mz	cf	PT7M6246CHC3E	Vdet-IC	4.6V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
mz	cf	PT7M6246CHTA3E	Vdet-IC	4.6V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
MZ	-	LM4040C50IDC	Vref-IC	µPower, Precision, Shunt, 5.00V±0.5%	SC-70	16dk	RF1	3d	Ti
MZ	-	ZVN4106F	n-MOSFET	V-MOS, 60V, 200mA, <5Ω(0.5A)	SOT-23	16fh	-	3a	Zx
MZT	-	ADM1810-10AKS	Vdet-IC	4.35V±2%, -Reset PPO	SOT-323	16vda	VD7	3a	Ad
MZT	-	ADM1810-10ART	Vdet-IC	4.35V±2%, -Reset PPO	SOT-23	16vda	VD7	3a	Ad
MZV	-	ADM1810-5AKS	Vdet-IC	4.62V±2%, -Reset PPO	SOT-323	16vda	VD7	3a	Ad
MZV	-	ADM1810-5ART	Vdet-IC	4.62V±2%, -Reset PPO	SOT-23	16vda	VD7	3a	Ad
n	-	AX6902GA	Vdet-IC	2.25V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Axl
N	-	DAN202K	Si-diode	Dual, Sw, 80V, 300mA, 200mW, <1.5ns	SC-59	16dg	-	3i	Rhm
N	-	DAN222	Si-diode	Dual, Sw, 80V, 300mA, 150mW, <1.5ns	SOT-416	16dg	-	3i	Rhm
N	-	DAP202K	Si-diode	Dual, Sw, 80V, 300mA, 200mW, <1.5ns	SC-59	16df	-	3i	Rhm
N	-	SB007T03Q	Si-diode	Dual, SBR, HF, 30V, 70mA, Vf<0.55V(70mA), 3pF, 10ns	MCP	16dl	-	3a	San
N	cr	ELM7534NEB	Vdet-IC	3.4V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
N	cs	ELM7534CEB	Vdet-IC	3.4V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
N0	-	AP8821N-50GC	Vdet-IC	5.0V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
N0	-	AP8821N-50GT	Vdet-IC	5.0V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
N0	-	AP8821N-50PC	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
N0	-	AP8821N-50PT	Vdet-IC	5.0V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
N0	-	BFR505T	Si-npn	RF, SATV, 20V, 18mA, 150mW, B=60..250, 9GHz	SOT-416	16ta	-	3a	Phi
N0	-	ELM7640LAB	Vdet-IC	4.0V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
N0	-	R1100D201C	LVR-IC	µ-low Icc, 2.0V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
N0	-	R3111N502C	Vdet-IC	5V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
N0	-	R3130N40DC	Vdet-IC	4V±1.5%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Ric
N0	-	TC54VN3002ECB	Vdet-IC	3.0V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
N0	-	TN0200T	n-MOSFET	V-MOS, LogL, 20V, 0.73A, <0.4Ω	SOT-23	16fh	-	3a	Six
N0	cg	BL8060CB3TR30	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N0	ch	BL8060CB3TR20	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N0	ci	BL8060CB3TR40	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N0	cj	BL8060CB3TR50	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N01	-	DDTC113TCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=1k	SOT-23	16ta	-	3d	Di
N01	-	DDTC113TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=1k	SOT-523	16ta	-	3d	Di
N01	-	DDTC113TKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=1k	SC-59	16ta	-	3d	Di



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N01	-	DDTC113TUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=1k	SOT-323	16ta	-	3d	Di
N01	-	SST4391	n-FET	Sw, Chopper, 40V, Idss=50mA, 350mW, Up<10V	SOT-23	16fa	-	3a	Cal
N02	-	DDTC113KA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=1k/10k	SC-59	16ta	-	3d	Di
N02	-	DDTC113ZCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=1k/10k	SOT-23	16ta	-	3d	Di
N02	-	DDTC113ZE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=1k/10k	SOT-523	16ta	-	3d	Di
N02	-	DDTC113ZKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=1k/10k	SC-59	16ta	-	3d	Di
N02	-	DDTC113ZUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=1k/10k	SOT-323	16ta	-	3d	Di
N02	-	FMS2302	n-MOSFET	Amp, 20V, 2.6A, 1.3W, <85 mΩ(3.6A), 5.2/15ns	SOT-23	16fh	-	3b	Frm
N02	-	SST4392	n-FET	Sw, Chopper, 40V, Idss=25mA, 350mW, Up<5V	SOT-23	16fa	-	3a	Cal
N02	-	ZXM61N02F	n-MOSFET	V-MOS, LogL, 20V, 1.7A, <0.18Ω	SOT-23	16fh	-	3a	Zx
N03	-	DDTC123TCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=2k2	SOT-23	16ta	-	3d	Di
N03	-	DDTC123TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=2k2	SOT-523	16ta	-	3d	Di
N03	-	DDTC123TKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=2k2	SC-59	16ta	-	3d	Di
N03	-	DDTC123TUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=2k2	SOT-323	16ta	-	3d	Di
N03	-	SST4393	n-FET	Sw, Chopper, 40V, Idss=5mA, 350mW, Up<3V	SOT-23	16fa	-	3a	Cal
N03	-	XC61CN3002M	Vdet-IC	3.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
N03	-	XE61CN3045MR	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
N03	-	ZXM61N03F	n-MOSFET	V-MOS, LogL, 30V, 1.4A, <0.3Ω	SOT-23	16fh	-	3a	Zx
N04	-	DDTC123ECA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/2k2	SOT-23	16ta	-	3d	Di
N04	-	DDTC123EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2k2/2k	SOT-523	16ta	-	3d	Di
N04	-	DDTC123EKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/2k2	SC-59	16ta	-	3d	Di
N04	-	DDTC123EUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/2k2	SOT-323	16ta	-	3d	Di
N05	-	DDTC123YCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/10k	SOT-23	16ta	-	3d	Di
N05	-	DDTC123YE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2k2/10k	SOT-523	16ta	-	3d	Di
N05	-	DDTC123YKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/10k	SC-59	16ta	-	3d	Di
N05	-	DDTC123YUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/10k	SOT-323	16ta	-	3d	Di
N05	-	LN61FN3012M	Vdet-IC	3.0V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
N05	-	SO2484	Si-npn	AF, LN, 60V, 50mA, 360mW, 100MHz, B>100	SOT-23	16ta	-	3a	Ste
N05	-	TC51N3002ECB	Vdet-IC	3.0V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
N05	-	XC61FN3012M	Vdet-IC	3.0V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
N05	-	XC61HN3012MR	Vdet-IC	3.0V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
N06	-	DDTC123JCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/47k	SOT-23	16ta	-	3d	Di
N06	-	DDTC123JE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2k2/47k	SOT-523	16ta	-	3d	Di
N06	-	DDTC123JKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/47k	SC-59	16ta	-	3d	Di
N06	-	DDTC123JUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/47k	SOT-323	16ta	-	3d	Di
N06	-	LN61FN3042M	Vdet-IC	3.0V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
N06	-	XC61FN3042M	Vdet-IC	3.0V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
N06	-	XC61HN3042MR	Vdet-IC	3.0V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
N07	-	DDTC143TCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4k7	SOT-23	16ta	-	3d	Di
N07	-	DDTC143TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=4k7	SOT-523	16ta	-	3d	Di
N07	-	DDTC143TKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4k7	SC-59	16ta	-	3d	Di
N07	-	DDTC143TUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4k7	SOT-323	16ta	-	3d	Di
N07	-	LN61FN3052M	Vdet-IC	3.0V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
N07	-	XC61FN3052M	Vdet-IC	3.0V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
N07	-	XC61HN3052MR	Vdet-IC	3.0V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
N08	-	DDTC143ECA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/4k7	SOT-23	16ta	-	3d	Di
N08	-	DDTC143EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/4k7	SOT-523	16ta	-	3d	Di
N08	-	DDTC143EKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/4k7	SC-59	16ta	-	3d	Di
N08	-	DDTC143EUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/4k7	SOT-323	16ta	-	3d	Di
N082A	-	VDA0820NTA	Vdet-IC	0.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N09	-	82N09-AE3-5	Vdet-IC	0.9V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N09	-	DDTC123XCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/10k	SOT-23	16ta	-	3d	Di
N09	-	DDTC123XE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/10k	SOT-523	16ta	-	3a	Di
N09	-	DDTC123XKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/10k	SC-59	16ta	-	3d	Di
N09	-	DDTC123XUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/10k	SOT-323	16ta	-	3d	Di
N09	-	DDTC143XCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/10k	SOT-23	16ta	-	3d	Di
N09	-	DDTC143XE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/10k	SOT-523	16ta	-	3d	Di
N09	-	DDTC143XKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/10k	SC-59	16ta	-	3d	Di
N09	-	DDTC143XUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/10k	SOT-323	16ta	-	3d	Di
N092A	-	VDA0920NTA	Vdet-IC	0.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N09G	-	82N09G-AE3-5	Vdet-IC	0.9V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N09L	-	82N09L-AE3-5	Vdet-IC	0.9V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N1	-	AP8821N-51GC	Vdet-IC	5.1V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
N1	-	AP8821N-51GT	Vdet-IC	5.1V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
N1	-	AP8821N-51PC	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
N1	-	AP8821N-51PT	Vdet-IC	5.1V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
N1	-	BFR53	Si-npn	UHF-A, 18V, 50mA, 2GHz	SOT-23	16ta	-	3a	Ste
N1	-	BL8060CB3TR11	LVR-IC	LDO, 1.1V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N1	-	DRC5113Z	Si-npn-Digi	Switching, 50V, 100mA, 150mW, R1/R2=1k/10k	SMini3-F2-B	18ta	-	3a	Pan
N1	-	ELM7641LAB	Vdet-IC	4.1V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N1	-	ILC5061IC31X	Vdet-IC	3.1V±2%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
N1	-	ILC5061M31X	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
N1	-	MMBZ5261B	Z-diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 350mW	SOT-23	16dc	-	3c	Pjt
N1	-	MMBZ5261BW	Z-diode	47V±5%, Izt=2.7mA, Zzt=105Ω, 200mW	SOT-323	16dc	-	3c	Pjt
N1	-	R1100D211C	LVR-IC	µ-low Icc, 2.1V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
N1	-	R3111N512C	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
N1	-	R3130N44DC	Vdet-IC	4.4V±1.5%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Ric
N1	-	RT1N141C	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10k/10k	SC-59	16ta	-	3a	Mit
N1	-	RT1N141M	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10k/10k	SOT-323	16ta	-	3a	Mit
N1	-	RT1N141T	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 200MHz, R1/R2=10k/10k	T-USM	18ta	-	3a	Mit
N1	-	RT1N141U	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 200MHz, R1/R2=10k/10k	SC-75A	16ta	-	3a	Mit
N1	-	TC54VN3102ECB	Vdet-IC	3.1V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
N1	-	TN0201T	n-MOSFET	V-MOS, 20V, 0.39A, <1Ω(0.5A)	SOT-23	16fh	-	3a	Six
N1	cg	BL8060CB3TR31	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N1	ch	BL8060CB3TR21	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N1	ci	BL8060CB3TR41	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N1	cj	BL8060CB3TR51	LVR-IC	LDO, 5.1V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N1-	-	BFS20W	Si-npn	RF, 30V, 25mA, 200mW, B=85, 470MHz	SOT-323	16ta	-	3a	Phi
N10	-	82N10-AE3-5	Vdet-IC	1.0V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N10	-	DDTC143FCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/22k	SOT-23	16ta	-	3d	Di
N10	-	DDTC143FE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/22k	SOT-523	16ta	-	3d	Di
N10	-	DDTC143FKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/22k	SC-59	16ta	-	3d	Di
N10	-	DDTC143FUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/22k	SOT-323	16ta	-	3d	Di
N102A	-	VDA1020NTA	Vdet-IC	1.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N10G	-	82N10G-AE3-5	Vdet-IC	1.0V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N10L	-	82N10L-AE3-5	Vdet-IC	1.0V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N11	-	2SK334-11	n-FET	GP, 20V, 50mA, 100mW, Idss=0.06..0.18mA	SOT-23	16fa	-	3a	San
N11	-	82N11-AE3-5	Vdet-IC	1.1V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N11	-	DDTC143ZCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/47k	SOT-23	16ta	-	3d	Di
N11	-	DDTC143ZE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/47k	SOT-523	16ta	-	3d	Di
N11	-	DDTC143ZKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/47k	SC-59	16ta	-	3d	Di
N11	-	DDTC143ZUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/47k	SOT-323	16ta	-	3d	Di
N11	-	LN809N4651M	Vdet-IC	4.63V±1%, Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Nln
N11	-	SO2369	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120, 400MHz	SOT-23	16ta	-	3a	Ste
N112A	-	VDA1120NTA	Vdet-IC	1.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N11B	-	FC61N113MG	Vdet-IC	1.1V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N11B	-	ML61N113M	Vdet-IC	1.1V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N11G	-	82N11G-AE3-5	Vdet-IC	1.1V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N11L	-	82N11L-AE3-5	Vdet-IC	1.1V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N11T	-	CM7P61N-11-T	Vdet-IC	1.1V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N12	-	2SK334-12	n-FET	GP, 20V, 50mA, 100mW, Idss=0.15..0.3mA	SOT-23	16fa	-	3a	San
N12	-	82N12-AE3-5	Vdet-IC	1.2V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N12	-	DDTC114TCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	SOT-23	16ta	-	3d	Di
N12	-	DDTC114TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=10k	SOT-523	16ta	-	3d	Di
N12	-	DDTC114TKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	SC-59	16ta	-	3d	Di
N12	-	DDTC114TUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	SOT-323	16ta	-	3d	Di
N12	-	SO2221	Si-npn	GP, 60V, 800mA, 500mW, >250MHz, B>20	SOT-23	16ta	-	3a	Ste
N122A	-	VDA1220NTA	Vdet-IC	1.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N12B	-	FC61N123MG	Vdet-IC	1.2V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N12B	-	ML61N123M	Vdet-IC	1.2V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N12G	-	82N12G-AE3-5	Vdet-IC	1.2V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N12L	-	82N12L-AE3-5	Vdet-IC	1.2V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N12T	-	CM7P61N-12-T	Vdet-IC	1.2V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N13	-	2SK334-13	n-FET	GP, 20V, 50mA, 100mW, Idss=0.25..0.45mA	SOT-23	16fa	-	3a	San
N13	-	82N13-AE3-5	Vdet-IC	1.3V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N13	-	DDTC114ECA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	SOT-23	16ta	-	3d	Di
N13	-	DDTC114EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=10k/10k	SOT-523	16ta	-	3d	Di
N13	-	DDTC114EKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	SC-59	16ta	-	3d	Di
N13	-	DDTC114EUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	SOT-323	16ta	-	3d	Di
N13	-	SO2222	Si-npn	GP, 60V, 800mA, 350mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Ste
N13	-	XC61CN3102M	Vdet-IC	3.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
N13	-	XE61CN3145MR	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
N132A	-	VDA1320NTA	Vdet-IC	1.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N13B	-	FC61N133MG	Vdet-IC	1.3V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N13B	-	ML61N133M	Vdet-IC	1.3V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N13G	-	82N13G-AE3-5	Vdet-IC	1.3V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N13L	-	82N13L-AE3-5	Vdet-IC	1.3V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N13T	-	CM7P61N-13-T	Vdet-IC	1.3V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N14	-	2SK334-14	n-FET	GP, 20V, 50mA, 100mW, Idss=0.4..0.8mA	SOT-23	16fa	-	3a	San
N14	-	82N14-AE3-5	Vdet-IC	1.4V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N14	-	DDTC114YCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10/47k	SOT-23	16ta	-	3d	Di
N14	-	DDTC114YE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=10k/47k	SOT-523	16ta	-	3d	Di
N14	-	DDTC114YKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10/47k	SC-59	16ta	-	3d	Di
N14	-	DDTC114YUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10/47k	SOT-323	16ta	-	3d	Di
N14	-	LN809N4641M	Vdet-IC	4.63V±1%, Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Nln
N142A	-	VDA1420NTA	Vdet-IC	1.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N14B	-	FC61N143MG	Vdet-IC	1.4V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N14B	-	ML61N143M	Vdet-IC	1.4V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N14G	-	82N14G-AE3-5	Vdet-IC	1.4V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N14L	-	82N14L-AE3-5	Vdet-IC	1.4V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N14T	-	CM7P61N-14-T	Vdet-IC	1.4V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N15	-	2SC3360-15	Si-npn	HV, Sw, 200V, 100mA, 200mW, 160MHz, B=90..180	SOT-23	16ta	-	3a	Nec
N15	-	82N15-AE3-5	Vdet-IC	1.5V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N15	-	DDTC114WCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10/47k	SOT-23	16ta	-	3d	Di
N15	-	DDTC114WE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=10k/47k	SOT-523	16ta	-	3d	Di
N15	-	DDTC114WKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10/47k	SC-59	16ta	-	3d	Di
N15	-	DDTC114WUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10/47k	SOT-323	16ta	-	3d	Di
N15	-	LN61FN3112M	Vdet-IC	3.1V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
N15	-	LN809N4611M	Vdet-IC	4.63V±1%, Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Nln
N15	-	TC51N3102ECB	Vdet-IC	3.1V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
N15	-	XC61FN3112M	Vdet-IC	3.1V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
N15	-	XC61HN3112MR	Vdet-IC	3.1V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
N152A	-	VDA1520NTA	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N15B	-	FC61N153MG	Vdet-IC	1.5V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N15B	-	ML61N153M	Vdet-IC	1.5V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N15G	-	82N15G-AE3-5	Vdet-IC	1.5V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N15L	-	82N15L-AE3-5	Vdet-IC	1.5V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N15T	-	CM7P61N-15-T	Vdet-IC	1.5V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N16	-	2SC3360-16	Si-npn	HV, Sw, 200V, 100mA, 200mW, 160MHz, B=135..270	SOT-23	16ta	-	3a	Nec
N16	-	82N16-AE3-5	Vdet-IC	1.6V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N16	-	DDTC124TCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=22k	SOT-23	16ta	-	3d	Di
N16	-	DDTC124TE	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=22k	SOT-523	16ta	-	3d	Di
N16	-	DDTC124TKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=22k	SC-59	16ta	-	3d	Di
N16	-	DDTC124TUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=22k	SOT-323	16ta	-	3d	Di
N16	-	LN61FN3142M	Vdet-IC	3.1V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
N16	-	XC61FN3142M	Vdet-IC	3.1V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
N16	-	XC61HN3142MR	Vdet-IC	3.1V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
N162A	-	VDA1620NTA	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N16B	-	FC61N163MG	Vdet-IC	1.6V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N16B	-	ML61N163M	Vdet-IC	1.6V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N16G	-	82N16G-AE3-5	Vdet-IC	1.6V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N16L	-	82N16L-AE3-5	Vdet-IC	1.6V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N16T	-	CM7P61N-16-T	Vdet-IC	1.6V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N17	-	2SC3360-17	Si-npn	HV, Sw, 200V, 100mA, 200mW, 160MHz, B=200..450	SOT-23	16ta	-	3a	Nec
N17	-	82N17-AE3-5	Vdet-IC	1.7V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N17	-	DDTC124ECA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SOT-23	16ta	-	3d	Di
N17	-	DDTC124EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=22k/22k	SOT-523	16ta	-	3d	Di
N17	-	DDTC124EKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SC-59	16ta	-	3d	Di
N17	-	DDTC124EUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SOT-323	16ta	-	3d	Di
N17	-	LN61FN3152M	Vdet-IC	3.1V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
N17	-	XC61FN3152M	Vdet-IC	3.1V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
N17	-	XC61HN3152MR	Vdet-IC	3.1V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
N172A	-	VDA1720NTA	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N17B	-	FC61N173MG	Vdet-IC	1.7V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N17B	-	ML61N173M	Vdet-IC	1.7V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N17G	-	82N17G-AE3-5	Vdet-IC	1.7V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N17L	-	82N17L-AE3-5	Vdet-IC	1.7V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N17T	-	CM7P61N-17-T	Vdet-IC	1.7V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N18	-	82N18-AE3-5	Vdet-IC	1.8V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N18	-	DDTC124XCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	SOT-23	16ta	-	3d	Di
N18	-	DDTC124XE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=22k/47k	SOT-523	16ta	-	3d	Di
N18	-	DDTC124XKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	SC-59	16ta	-	3d	Di
N18	-	DDTC124XUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	SOT-323	16ta	-	3d	Di
N18	-	SO1711	Si-npn	GP. 75V, 1A, 1W, >70MHz	SOT-23	16ta	-	3a	Ste
N181A	-	VDA1810NTA	Vdet-IC	1.8V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N18B	-	FC61N183MG	Vdet-IC	1.8V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N18B	-	ML61N183M	Vdet-IC	1.8V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N18G	-	82N18G-AE3-5	Vdet-IC	1.8V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N18L	-	82N18L-AE3-5	Vdet-IC	1.8V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N18LA	-	VDD1810LNTA	Vdet-IC	1.8V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N18MA	-	VDD1810MNTA	Vdet-IC	1.8V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N18SA	-	VDD1810SNTA	Vdet-IC	1.8V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N18T	-	CM7P61N-18-T	Vdet-IC	1.8V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N19	-	82N19-AE3-5	Vdet-IC	1.9V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N19	-	DDTC144TCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=47k	SOT-23	16ta	-	3d	Di
N19	-	DDTC144TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=47k	SOT-523	16ta	-	3d	Di
N19	-	DDTC144TKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=47k	SC-59	16ta	-	3d	Di
N19	-	DDTC144TUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1= 47k	SOT-323	16ta	-	3d	Di
N191A	-	VDA1910NTA	Vdet-IC	1.9V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N19B	-	FC61N193MG	Vdet-IC	1.9V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N19B	-	ML61N193M	Vdet-IC	1.9V±3%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N19G	-	82N19G-AE3-5	Vdet-IC	1.9V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N19L	-	82N19L-AE3-5	Vdet-IC	1.9V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N19LA	-	VDD1910LNTA	Vdet-IC	1.9V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N19MA	-	VDD1910MNTA	Vdet-IC	1.9V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N19SA	-	VDD1910SNTA	Vdet-IC	1.9V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N19T	-	CM7P61N-19-T	Vdet-IC	1.9V±3%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N1A	-	ILC5061AIC31X	Vdet-IC	3.1V±1%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
N1A	-	ILC5061AM31X	Vdet-IC	3.1V±1%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
N1A	-	LM431CIM3	Vref-IC	Adjust, Precision, Shunt, 2.44..2.55V±0.5%, -40..+85°C	SOT-23	16rc	RF2	3a	Nsc
N1B	-	LM431CCM3	Vref-IC	Adjust, Precision, Shunt, 2.44..2.55V±0.5%, 0..+70°C	SOT-23	16rc	RF2	3a	Nsc
N1C	-	LM431BIM3	Vref-IC	Adjust, Precision, Shunt, 2.44..2.55V±1%, -40..+85°C	SOT-23	16rc	RF2	3a	Nsc
N1C	-	TN2124K1	n-MOSFET	V-MOS, LogL, 240V, 134mA, <15Ω(0.12A), <12/22ns	SOT-23	16fh	-	3a	Stx
N1D	-	LM431BCM3	Vref-IC	Adjust, Precision, Shunt, 2.44..2.55V±1%, 0..+70°C	SOT-23	16rc	RF2	3a	Nsc
N1E	-	LM431AIM3	Vref-IC	Adjust, Precision, Shunt, 2.44..2.55V±2%, -40..+85°C	SOT-23	16rc	RF2	3a	Nsc
N1F	-	LM431ACM3	Vref-IC	Adjust, Precision, Shunt, 2.44..2.55V±2%, 0..+70°C	SOT-23	16rc	RF2	3a	Nsc
N1L	-	TN2106K1	n-MOSFET	V-MOS, LogL, 60V, 280mA, <5Ω(0.5A)	SOT-23	16fh	-	3a	Stx
N1p	-	BFR53	Si-npn	UHF-A, 18V, 50mA, 2GHz	SOT-23	16ta	-	3a	Phi
N1t	-	BFS20W	Si-npn	RF, 30V, 25mA, 200mW, B=85, 470MHz	SOT-323	16ta	-	3a	Phi
N1T	-	TN2130K1	n-MOSFET	V-MOS, LogL, 300V, 85mA, <25Ω(0.12A), <17/27ns	SOT-23	16fh	-	3a	Stx
N1U	-	TN2101K1	n-MOSFET	V-MOS, LogL, 15V, 170mA, <7Ω(50(A)	SOT-23	16fh	-	3a	Stx
N2	-	2SC1653-2	Si-npn	Sw, HV-drive, 150V, 50mA, 150mW, B=90..180, 120MHz	SOT-23	16ta	-	3a	Nec
N2	-	AP8821N-52GC	Vdet-IC	5.2V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
N2	-	AP8821N-52GT	Vdet-IC	5.2V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
N2	-	AP8821N-52PC	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
N2	-	AP8821N-52PT	Vdet-IC	5.2V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
N2	-	BFR520T	Si-npn	RF, SATV, 20V, 70mA, 150mW, B=60..250, 9GHz	SOT-416	16ta	-	3a	Phi
N2	-	BL8060CB3TR12	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N2	-	ELM7642LAB	Vdet-IC	4.2V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
N2	-	ILC5061IC32X	Vdet-IC	3.2V±2%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
N2	-	ILC5061M32X	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
N2	-	KRC116S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=1k/10k	SOT-23	16ta	-	3f	Kec
N2	-	KRC416	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=1k/10k	SOT-323	16ta	-	3f	Kec
N2	-	KRC416E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=1k/10k	SOT-490	18ta	-	3f	Kec
N2	-	KRC416V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=1k/10k	VSM	18ta	-	3f	Kec
N2	-	MMBC1653N2	Si-npn	Switch, HV drive, 150V, 50mA, 150mW, B=50-130, 120MHz	SOT-23	16ta	-	3a	Sam
N2	-	MMBT200	Si-pnp	GP, 75V, 500mA, 350mW, B=80..400, 250MHz	SOT-23	16ta	-	3a	F
N2	-	MMBZ5262B	Z-diode	51V±5%, Izt=2.5mA, Zzt=125Ω, 350mW	SOT-23	16dc	-	3c	Pjt
N2	-	MMBZ5262BW	Z-diode	51V±5%, Izt=2.5mA, Zzt=125Ω, 200mW	SOT-323	16dc	-	3c	Pjt
N2	-	R1100D221C	LVR-IC	μ-low Icc, 2.2V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
N2	-	R3111N522C	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
N2	-	R3130N26DC3	Vdet-IC	2.6V±1.5%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Ric
N2	-	RT1N241C	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=22k/22k	SC-59	16ta	-	3a	Mit
N2	-	RT1N241M	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=22k/22k	SOT-323	16ta	-	3a	Mit
N2	-	RT1N241U	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 200MHz, R1/R2=22k/22k	SC-75A	16ta	-	3a	Mit
N2	-	TC54VN3202ECB	Vdet-IC	3.2V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
N2	cg	BL8060CB3TR32	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N2	ch	BL8060CB3TR22	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N2	ci	BL8060CB3TR42	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N2	cj	BL8060CB3TR52	LVR-IC	LDO, 5.2V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N20	-	82N20-AE3-5	Vdet-IC	2.0V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N20	-	DDTC124ECA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SOT-23	16ta	-	3d	Di
N20	-	DDTC124EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=22k/22k	SOT-523	16ta	-	3d	Di
N20	-	DDTC124EKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SC-59	16ta	-	3d	Di
N20	-	DDTC124EUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SOT-323	16ta	-	3d	Di
N20	-	DDTC144ECA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	SOT-23	16ta	-	3d	Di
N20	-	DDTC144EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=47k/47k	SOT-523	16ta	-	3d	Di
N20	-	DDTC144EKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	SC-59	16ta	-	3d	Di
N20	-	DDTC144EUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	SOT-323	16ta	-	3d	Di
N20	-	SO2222A	Si-npn	GP, 75V, 800mA, 350mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	Ste



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N201A	-	VDA2010NTA	Vdet-IC	2.0V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N20B	-	FC61N202MG	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N20B	-	ML61N202M	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N20G	-	82N20G-AE3-5	Vdet-IC	2.0V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N20L	-	82N20L-AE3-5	Vdet-IC	2.0V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N20LA	-	VDD2010LNTA	Vdet-IC	2.0V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N20MA	-	VDD2010MNTA	Vdet-IC	2.0V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N20SA	-	VDD2010SNTA	Vdet-IC	2.0V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N20T	-	CM7P61N-20-T	Vdet-IC	2.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N21	-	82N21-AE3-5	Vdet-IC	2.1V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N21	-	DDTC144VCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/10k	SOT-23	16ta	-	3d	Di
N21	-	DDTC144VE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=47k/10k	SOT-523	16ta	-	3d	Di
N21	-	DDTC144VKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/10k	SC-59	16ta	-	3d	Di
N21	-	DDTC144VUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/10k	SOT-323	16ta	-	3d	Di
N21	-	LN809N4351M	Vdet-IC	4.38V±1%, Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Nln
N211A	-	VDA2110NTA	Vdet-IC	2.1V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N21B	-	FC61N212MG	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N21B	-	ML61N212M	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N21G	-	82N21G-AE3-5	Vdet-IC	2.1V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N21L	-	82N21L-AE3-5	Vdet-IC	2.1V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N21LA	-	VDD2110LNTA	Vdet-IC	2.1V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N21MA	-	VDD2110MNTA	Vdet-IC	2.1V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N21SA	-	VDD2110SNTA	Vdet-IC	2.1V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N21T	-	CM7P61N-21-T	Vdet-IC	2.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N22	-	82N22-AE3-5	Vdet-IC	2.2V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N22	-	DDTC144WCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/22k	SOT-23	16ta	-	3d	Di
N22	-	DDTC144WE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=47k/22k	SOT-523	16ta	-	3d	Di
N22	-	DDTC144WKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/22k	SC-59	16ta	-	3d	Di
N22	-	DDTC144WUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/22k	SOT-323	16ta	-	3d	Di
N221A	-	VDA2210NTA	Vdet-IC	2.2V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N22B	-	FC61N222MG	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N22B	-	ML61N222M	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N22G	-	82N22G-AE3-5	Vdet-IC	2.2V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N22L	-	82N22L-AE3-5	Vdet-IC	2.2V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N22LA	-	VDD2210LNTA	Vdet-IC	2.2V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N22MA	-	VDD2210MNTA	Vdet-IC	2.2V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N22SA	-	VDD2210SNTA	Vdet-IC	2.2V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N22T	-	CM7P61N-22-T	Vdet-IC	2.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N23	-	82N23-AE3-5	Vdet-IC	2.3V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N23	-	DDTC115TCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=100k	SOT-23	16ta	-	3d	Di
N23	-	DDTC115TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=100k	SOT-523	16ta	-	3d	Di
N23	-	DDTC115TKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=100k	SC-59	16ta	-	3d	Di
N23	-	DDTC115TUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=100k	SOT-323	16ta	-	3d	Di
N23	-	S72N23SF	Vdet-IC	2.3V±3.0%, +Reset OCO	SOT-23F	18vdc	VD6	3b	Auk
N23	-	S72N23UF	Vdet-IC	2.3V±3.0%, +Reset OCO	SOT-323F	18vdc	VD6	3b	Auk
N23	-	XC61CN3202M	Vdet-IC	3.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
N23	-	XE61CN3245MR	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
N231A	-	VDA2310NTA	Vdet-IC	2.3V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N23B	-	FC61N232MG	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N23B	-	ML61N232M	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N23G	-	82N23G-AE3-5	Vdet-IC	2.3V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N23L	-	82N23L-AE3-5	Vdet-IC	2.3V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N23LA	-	VDD2310LNTA	Vdet-IC	2.3V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N23MA	-	VDD2310MNTA	Vdet-IC	2.3V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N23SA	-	VDD2310SNTA	Vdet-IC	2.3V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N23T	-	CM7P61N-23-T	Vdet-IC	2.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N24	-	82N24-AE3-5	Vdet-IC	2.4V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N24	-	DDTC115ECA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=100k/100k	SOT-23	16ta	-	3d	Di
N24	-	DDTC115EE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=100k/100k	SOT-523	16ta	-	3d	Di
N24	-	DDTC115EKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=100k/100k	SC-59	16ta	-	3d	Di
N24	-	DDTC115EUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=100k/100k	SOT-323	16ta	-	3d	Di
N24	-	LN809N4341M	Vdet-IC	4.38V±1%, Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Nln
N241A	-	VDA2410NTA	Vdet-IC	2.4V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N24B	-	FC61N242MG	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N24B	-	ML61N242M	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N24G	-	82N24G-AE3-5	Vdet-IC	2.4V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N24L	-	82N24L-AE3-5	Vdet-IC	2.4V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N24LA	-	VDD2410LNTA	Vdet-IC	2.4V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N24MA	-	VDD2410MNTA	Vdet-IC	2.4V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N24SA	-	VDD2410SNTA	Vdet-IC	2.4V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N24T	-	CM7P61N-24-T	Vdet-IC	2.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N25	-	82N25-AE3-5	Vdet-IC	2.5V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N25	-	DDTC125TCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=200k	SOT-23	16ta	-	3d	Di
N25	-	DDTC125TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=200k	SOT-523	16ta	-	3d	Di
N25	-	DDTC125TKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=200k	SC-59	16ta	-	3d	Di
N25	-	DDTC125TUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=200k	SOT-323	16ta	-	3d	Di
N25	-	LN61FN3212M	Vdet-IC	3.2V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
N25	-	LN809N4311M	Vdet-IC	4.38V±1%, Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Nln
N25	-	S72N25UF	Vdet-IC	2.5V±3.0%, +Reset OCO	SOT-323F	18vdc	VD6	3b	Auk
N25	-	TC51N3202ECB	Vdet-IC	3.2V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
N25	-	XC61FN3212M	Vdet-IC	3.2V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
N25	-	XC61HN3212MR	Vdet-IC	3.2V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
N251A	-	VDA2510NTA	Vdet-IC	2.5V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N25B	-	FC61N252MG	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N25B	-	ML61N252M	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N25G	-	82N25G-AE3-5	Vdet-IC	2.5V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N25L	-	82N25L-AE3-5	Vdet-IC	2.5V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N25LA	-	VDD2510LNTA	Vdet-IC	2.5V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N25MA	-	VDD2510MNTA	Vdet-IC	2.5V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N25SA	-	VDD2510SNTA	Vdet-IC	2.5V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N25T	-	CM7P61N-25-T	Vdet-IC	2.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N26	-	82N26-AE3-5	Vdet-IC	2.6V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N26	-	DDTC114GCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=10k	SOT-23	16ta	-	3d	Di
N26	-	DDTC114GE	Si-npn-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=10k	SOT-523	16ta	-	3d	Di
N26	-	DDTC114GKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=10k	SC-59	16ta	-	3d	Di
N26	-	DDTC114GUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=10k	SOT-323	16ta	-	3d	Di
N26	-	LN61FN3242M	Vdet-IC	3.2V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
N26	-	XC61FN3242M	Vdet-IC	3.2V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
N26	-	XC61HN3242MR	Vdet-IC	3.2V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
N261A	-	VDA2610NTA	Vdet-IC	2.6V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N26B	-	FC61N262MG	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N26B	-	ML61N262M	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N26G	-	82N26G-AE3-5	Vdet-IC	2.6V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N26L	-	82N26L-AE3-5	Vdet-IC	2.6V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N26LA	-	VDD2610LNTA	Vdet-IC	2.6V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N26MA	-	VDD2610MNTA	Vdet-IC	2.6V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N26SA	-	VDD2610SNTA	Vdet-IC	2.6V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N26T	-	CM7P61N-26-T	Vdet-IC	2.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N27	-	82N27-AE3-5	Vdet-IC	2.7V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N27	-	DDTC124GCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=22k	SOT-23	16ta	-	3d	Di
N27	-	DDTC124GE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R2=22k	SOT-523	16ta	-	3d	Di
N27	-	DDTC124GKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=22k	SC-59	16ta	-	3d	Di
N27	-	DDTC124GUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=22k	SOT-323	16ta	-	3d	Di
N27	-	LN61FN3252M	Vdet-IC	3.2V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
N27	-	S72N27SF	Vdet-IC	2.7V±3.0%, +Reset OCO	SOT-23F	18vdc	VD6	3b	Auk
N27	-	S72N27UF	Vdet-IC	2.7V±3.0%, +Reset OCO	SOT-323F	18vdc	VD6	3b	Auk
N27	-	SO1893	Si-npn	AF, Sw, 120V, 500mA, 800mW, 70MHz	SOT-23	16ta	-	3a	Ste
N27	-	XC61FN3252M	Vdet-IC	3.2V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
N27	-	XC61HN3252MR	Vdet-IC	3.2V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
N271A	-	VDA2710NTA	Vdet-IC	2.7V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N27B	-	FC61N272MG	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N27B	-	ML61N272M	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N27G	-	82N27G-AE3-5	Vdet-IC	2.7V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N27L	-	82N27L-AE3-5	Vdet-IC	2.7V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N27LA	-	VDD2710LNTA	Vdet-IC	2.7V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N27MA	-	VDD2710MNTA	Vdet-IC	2.7V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N27SA	-	VDD2710SNTA	Vdet-IC	2.7V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N27T	-	CM7P61N-27-T	Vdet-IC	2.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N28	-	82N28-AE3-5	Vdet-IC	2.8V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N28	-	BFR520	Si-npn	RF, SATV, 20V, 70mA, 300mW, B=60..250, 9GHz	SOT-23	16ta	-	3a	Phi
N28	-	DDTC144GCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=47k	SOT-23	16ta	-	3d	Di
N28	-	DDTC144GE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R2=47k	SOT-523	16ta	-	3d	Di
N28	-	DDTC144GKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=47k	SC-59	16ta	-	3d	Di
N28	-	DDTC144GUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=47k	SOT-323	16ta	-	3d	Di
N281A	-	VDA2810NTA	Vdet-IC	2.8V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N28B	-	FC61N282MG	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N28B	-	ML61N282M	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N28G	-	82N28G-AE3-5	Vdet-IC	2.8V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N28L	-	82N28L-AE3-5	Vdet-IC	2.8V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N28LA	-	VDD2810LNTA	Vdet-IC	2.8V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N28MA	-	VDD2810MNTA	Vdet-IC	2.8V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N28SA	-	VDD2810SNTA	Vdet-IC	2.8V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N28T	-	CM7P61N-28-T	Vdet-IC	2.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N29	-	82N29-AE3-5	Vdet-IC	2.9V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N29	-	BFR540	Si-npn	RF, SATV, 20V, 120mA, 250mW, B=100..250, 9GHz	SOT-23	16ta	-	3a	Phi
N29	-	DDTC115GCA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=100k	SOT-23	16ta	-	3d	Di
N29	-	DDTC115GE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R2=100k	SOT-523	16ta	-	3d	Di
N29	-	DDTC115GKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=100k	SC-59	16ta	-	3d	Di
N29	-	DDTC115GUA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=100k	SOT-323	16ta	-	3d	Di
N29	-	S72N29SF	Vdet-IC	2.9V±3.0%, +Reset OCO	SOT-23F	18vdc	VD6	3b	Auk
N29	-	S72N29UF	Vdet-IC	2.9V±3.0%, +Reset OCO	SOT-323F	18vdc	VD6	3b	Auk
N291A	-	VDA2910NTA	Vdet-IC	2.9V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N29B	-	FC61N292MG	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N29B	-	ML61N292M	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N29G	-	82N29G-AE3-5	Vdet-IC	2.9V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N29L	-	82N29L-AE3-5	Vdet-IC	2.9V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N29LA	-	VDD2910LNTA	Vdet-IC	2.9V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N29MA	-	VDD2910MNTA	Vdet-IC	2.9V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N29SA	-	VDD2910SNTA	Vdet-IC	2.9V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N29T	-	CM7P61N-29-T	Vdet-IC	2.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N2A	-	ILC5061AIC32X	Vdet-IC	3.2V±1%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
N2A	-	ILC5061AM32X	Vdet-IC	3.2V±1%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
N2A	-	MMBT200A	Si-pnp	GP, 75V, 500mA, 350mW, B=240..600, 250MHz	SOT-23	16ta	-	3a	F
N3	-	2SC1653-3	Si-npn	Sw, HV-drive, 150V, 50mA, 150mW, B=135..270, 120MHz	SOT-23	16ta	-	3a	Nec
N3	-	AP8821N-53GC	Vdet-IC	5.3V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
N3	-	AP8821N-53GT	Vdet-IC	5.3V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
N3	-	AP8821N-53PC	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
N3	-	AP8821N-53PT	Vdet-IC	5.3V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
N3	-	BL8060CB3TR13	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N3	-	ELM7643LAB	Vdet-IC	4.3V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
N3	-	MMBC1653N3	Si-npn	Switch, HV drive, 150V, 50mA, 150mW, B=100-220, 120MHz	SOT-23	16ta	-	3a	Sam
N3	-	MMBZ5263BW	Z-diode	56V±5%, Izt=2.2mA, Zzt=150Ω, 200mW	SOT-323	16dc	-	3c	Pjt
N3	-	R1100D231C	LVR-IC	µ-low Icc, 2.3V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
N3	-	R3111N532C	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
N3	-	R3130N29DC3	Vdet-IC	2.9V±1.5%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Ric
N3	-	RT1N441C	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=47k/47k	SC-59	16ta	-	3a	Mit
N3	-	RT1N441M	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=47k/47k	SOT-323	16ta	-	3a	Mit
N3	-	RT1N441U	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 200MHz, R1/R2=47k/47k	SC-75A	16ta	-	3a	Mit
N3	-	TC54VN3302ECB	Vdet-IC	3.3V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
N3	cg	BL8060CB3TR33	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N3	ch	BL8060CB3TR23	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N3	ci	BL8060CB3TR43	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N3	cj	BL8060CB3TR53	LVR-IC	LDO, 5.3V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N30	-	82N30-AE3-5	Vdet-IC	3.0V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N30	-	BFR505	Si-npn	RF, SATV, 20V, 18mA, 150mW, B=60..250, 9GHz	SOT-23	16ta	-	3a	Phi
N301A	-	VDA3010NTA	Vdet-IC	3.0V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N30B	-	FC61N302MG	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N30B	-	ML61N302M	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N30G	-	82N30G-AE3-5	Vdet-IC	3.0V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N30L	-	82N30L-AE3-5	Vdet-IC	3.0V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N30LA	-	VDD3010LNTA	Vdet-IC	3.0V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N30MA	-	VDD3010MNTA	Vdet-IC	3.0V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N30SA	-	VDD3010SNTA	Vdet-IC	3.0V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N30T	-	CM7P61N-30-T	Vdet-IC	3.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N31	-	82N31-AE3-5	Vdet-IC	3.1V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N31	-	LN809N4051M	Vdet-IC	4.0V±1%, Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Nln
N31	-	S72N31SF	Vdet-IC	3.1V±3.0%, +Reset OCO	SOT-23F	18vdc	VD6	3b	Auk
N31	-	S72N31UF	Vdet-IC	3.1V±3.0%, +Reset OCO	SOT-323F	18vdc	VD6	3b	Auk
N311A	-	VDA3110NTA	Vdet-IC	3.1V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N31B	-	FC61N312MG	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N31B	-	ML61N312M	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N31G	-	82N31G-AE3-5	Vdet-IC	3.1V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N31L	-	82N31L-AE3-5	Vdet-IC	3.1V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N31LA	-	VDD3110LNTA	Vdet-IC	3.1V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N31MA	-	VDD3110MNTA	Vdet-IC	3.1V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N31SA	-	VDD3110SNTA	Vdet-IC	3.1V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N31T	-	CM7P61N-31-T	Vdet-IC	3.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N32	-	82N32-AE3-5	Vdet-IC	3.2V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N321A	-	VDA3210NTA	Vdet-IC	3.2V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N32B	-	FC61N322MG	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N32B	-	ML61N322M	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N32G	-	82N32G-AE3-5	Vdet-IC	3.2V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N32L	-	82N32L-AE3-5	Vdet-IC	3.2V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N32LA	-	VDD3210LNTA	Vdet-IC	3.2V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N32MA	-	VDD3210MNTA	Vdet-IC	3.2V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N32SA	-	VDD3210SNTA	Vdet-IC	3.2V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N32T	-	CM7P61N-32-T	Vdet-IC	3.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N33	-	82N33-AE3-5	Vdet-IC	3.3V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N33	-	S72N33SF	Vdet-IC	3.3V±3.0%, +Reset OCO	SOT-23F	18vdc	VD6	3b	Auk
N33	-	S72N33UF	Vdet-IC	3.3V±3.0%, +Reset OCO	SOT-323F	18vdc	VD6	3b	Auk
N33	-	XC61CN3302M	Vdet-IC	3.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
N33	-	XE61CN3345MR	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
N331A	-	VDA3310NTA	Vdet-IC	3.3V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N33B	-	FC61N332MG	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N33B	-	ML61N332M	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N33G	-	82N33G-AE3-5	Vdet-IC	3.3V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N33L	-	82N33L-AE3-5	Vdet-IC	3.3V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N33LA	-	VDD3310LNTA	Vdet-IC	3.3V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N33MA	-	VDD3310MNTA	Vdet-IC	3.3V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N33SA	-	VDD3310SNTA	Vdet-IC	3.3V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N33T	-	CM7P61N-33-T	Vdet-IC	3.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N34	-	82N34-AE3-5	Vdet-IC	3.4V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N34	-	LN809N4041M	Vdet-IC	4.0V±1%, Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Nln
N341A	-	VDA3410NTA	Vdet-IC	3.4V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N34B	-	FC61N342MG	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N34B	-	ML61N342M	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N34G	-	82N34G-AE3-5	Vdet-IC	3.4V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N34L	-	82N34L-AE3-5	Vdet-IC	3.4V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N34LA	-	VDD3410LNTA	Vdet-IC	3.4V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N34MA	-	VDD3410MNTA	Vdet-IC	3.4V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N34SA	-	VDD3410SNTA	Vdet-IC	3.4V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N34T	-	CM7P61N-34-T	Vdet-IC	3.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N35	-	82N35-AE3-5	Vdet-IC	3.5V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N35	-	LN61FN3312M	Vdet-IC	3.3V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
N35	-	LN809N4011M	Vdet-IC	4.0V±1%, Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Nln
N35	-	TC51N3302ECB	Vdet-IC	3.3V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
N35	-	XC61FN3312M	Vdet-IC	3.3V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
N35	-	XC61HN3312MR	Vdet-IC	3.3V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
N351A	-	VDA3510NTA	Vdet-IC	3.5V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N35B	-	FC61N352MG	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N35B	-	ML61N352M	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N35G	-	82N35G-AE3-5	Vdet-IC	3.5V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N35L	-	82N35L-AE3-5	Vdet-IC	3.5V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N35LA	-	VDD3510LNTA	Vdet-IC	3.5V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N35MA	-	VDD3510MNTA	Vdet-IC	3.5V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N35SA	-	VDD3510SNTA	Vdet-IC	3.5V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N35T	-	CM7P61N-35-T	Vdet-IC	3.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N36	-	82N36-AE3-5	Vdet-IC	3.6V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N36	-	LN61FN3342M	Vdet-IC	3.3V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
N36	-	S72N36SF	Vdet-IC	3.6V±3.0%, +Reset OCO	SOT-23F	18vdc	VD6	3b	Auk
N36	-	S72N36UF	Vdet-IC	3.6V±3.0%, +Reset OCO	SOT-323F	18vdc	VD6	3b	Auk
N36	-	XC61FN3342M	Vdet-IC	3.3V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
N36	-	XC61HN3342MR	Vdet-IC	3.3V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
N361A	-	VDA3610NTA	Vdet-IC	3.6V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N36B	-	FC61N362MG	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N36B	-	ML61N362M	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N36G	-	82N36G-AE3-5	Vdet-IC	3.6V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N36L	-	82N36L-AE3-5	Vdet-IC	3.6V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N36LA	-	VDD3610LNTA	Vdet-IC	3.6V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N36MA	-	VDD3610MNTA	Vdet-IC	3.6V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N36SA	-	VDD3610SNTA	Vdet-IC	3.6V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N36T	-	CM7P61N-36-T	Vdet-IC	3.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N37	-	82N37-AE3-5	Vdet-IC	3.7V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N37	-	LN61FN3352M	Vdet-IC	3.3V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
N37	-	XC61FN3352M	Vdet-IC	3.3V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
N37	-	XC61HN3352MR	Vdet-IC	3.3V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
N371A	-	VDA3710NTA	Vdet-IC	3.7V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N37B	-	FC61N372MG	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N37B	-	ML61N372M	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N37G	-	82N37G-AE3-5	Vdet-IC	3.7V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N37L	-	82N37L-AE3-5	Vdet-IC	3.7V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N37LA	-	VDD3710LNTA	Vdet-IC	3.7V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N37MA	-	VDD3710MNTA	Vdet-IC	3.7V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N37SA	-	VDD3710SNTA	Vdet-IC	3.7V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N37T	-	CM7P61N-37-T	Vdet-IC	3.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N38	-	82N38-AE3-5	Vdet-IC	3.8V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N381A	-	VDA3810NTA	Vdet-IC	3.8V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N38B	-	FC61N382MG	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N38B	-	ML61N382M	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N38G	-	82N38G-AE3-5	Vdet-IC	3.8V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N38L	-	82N38L-AE3-5	Vdet-IC	3.8V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N38LA	-	VDD3810LNTA	Vdet-IC	3.8V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N38MA	-	VDD3810MNTA	Vdet-IC	3.8V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N38SA	-	VDD3810SNTA	Vdet-IC	3.8V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N38T	-	CM7P61N-38-T	Vdet-IC	3.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N39	-	82N39-AE3-5	Vdet-IC	3.9V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N39	-	S72N39SF	Vdet-IC	3.9V±3.0%, +Reset OCO	SOT-23F	18vdc	VD6	3b	Auk
N39	-	S72N39UF	Vdet-IC	3.9V±3.0%, +Reset OCO	SOT-323F	18vdc	VD6	3b	Auk
N391A	-	VDA3910NTA	Vdet-IC	3.9V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N39B	-	FC61N392MG	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N39B	-	ML61N392M	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N39G	-	82N39G-AE3-5	Vdet-IC	3.9V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N39L	-	82N39L-AE3-5	Vdet-IC	3.9V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N39LA	-	VDD3910LNTA	Vdet-IC	3.9V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N39MA	-	VDD3910MNTA	Vdet-IC	3.9V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N39SA	-	VDD3910SNTA	Vdet-IC	3.9V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N39T	-	CM7P61N-39-T	Vdet-IC	3.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N4	-	2SC1653-4	Si-npn	Sw, HV-drive, 150V, 50mA, 150mW, B=200..400, 120MHz	SOT-23	16ta	-	3a	Nec
N4	-	AP8821N-54GC	Vdet-IC	5.4V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
N4	-	AP8821N-54GT	Vdet-IC	5.4V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
N4	-	AP8821N-54PC	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
N4	-	AP8821N-54PT	Vdet-IC	5.4V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
N4	-	BFR53R	Si-npn	UHF-A, 18V, 50mA, 2GHz	SOT-23	16te	-	3a	Phi
N4	-	BL8060CB3TR14	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N4	-	ELM7644LAB	Vdet-IC	4.4V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
N4	-	ILC5061IC34X	Vdet-IC	3.4V±2%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
N4	-	ILC5061M34X	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
N4	-	KA4L4Z	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=47k	SOT-416	16ta	-	3a	Nec
N4	-	KRC117S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=2k2/2k2	SOT-23	16ta	-	3f	Kec
N4	-	KRC417	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/2k2	SOT-323	16ta	-	3f	Kec
N4	-	KRC417E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/2k2	SOT-490	18ta	-	3f	Kec
N4	-	KRC417V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/2k2	VSM	18ta	-	3f	Kec
N4	-	MMBC1653N4	Si-npn	Switch, HV drive, 150V, 50mA, 150mW, B=150-330, 120MHz	SOT-23	16ta	-	3a	Sam
N4	-	MMBZ5264BW	Z-diode	60V±5%, Izt=2.1mA, Zzt=170Ω, 200mW	SOT-323	16dc	-	3c	Pjt
N4	-	R1100D241C	LVR-IC	μ-low Icc, 2.4V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
N4	-	R3111N542C	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
N4	-	R3130N30DC8	Vdet-IC	3V±1.5%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Ric
N4	-	SP809EK-2-3	Vdet-IC	2.3V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Sip
N4	-	TC54VN3402ECB	Vdet-IC	3.4V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
N4	cg	BL8060CB3TR34	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N4	ch	BL8060CB3TR24	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N4	ci	BL8060CB3TR44	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N4	cj	BL8060CB3TR54	LVR-IC	LDO, 5.4V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N40	-	82N40-AE3-5	Vdet-IC	4.0V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N401A	-	VDA4010NTA	Vdet-IC	4.0V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N40B	-	FC61N402MG	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N40B	-	ML61N402M	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N40G	-	82N40G-AE3-5	Vdet-IC	4.0V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N40L	-	82N40L-AE3-5	Vdet-IC	4.0V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N40LA	-	VDD4010LNTA	Vdet-IC	4.0V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N40MA	-	VDD4010MNTA	Vdet-IC	4.0V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N40SA	-	VDD4010SNTA	Vdet-IC	4.0V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N40T	-	CM7P61N-40-T	Vdet-IC	4.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N41	-	82N41-AE3-5	Vdet-IC	4.1V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N41	-	LN809N3051M	Vdet-IC	3.08V±1%, Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Nln
N411A	-	VDA4110NTA	Vdet-IC	4.1V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N41B	-	FC61N412MG	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N41B	-	ML61N412M	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N41G	-	82N41G-AE3-5	Vdet-IC	4.1V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N41L	-	82N41L-AE3-5	Vdet-IC	4.1V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N41LA	-	VDD4110LNTA	Vdet-IC	4.1V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N41MA	-	VDD4110MNTA	Vdet-IC	4.1V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N41SA	-	VDD4110SNTA	Vdet-IC	4.1V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N41T	-	CM7P61N-41-T	Vdet-IC	4.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N42	-	82N42-AE3-5	Vdet-IC	4.2V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N42	-	S72N42SF	Vdet-IC	4.2V±3.0%, +Reset OCO	SOT-23F	18vdc	VD6	3b	Auk
N42	-	S72N42UF	Vdet-IC	4.2V±3.0%, +Reset OCO	SOT-323F	18vdc	VD6	3b	Auk
N421A	-	VDA4210NTA	Vdet-IC	4.2V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N42B	-	FC61N422MG	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N42B	-	ML61N422M	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N42G	-	82N42G-AE3-5	Vdet-IC	4.2V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N42L	-	82N42L-AE3-5	Vdet-IC	4.2V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N42LA	-	VDD4210LNTA	Vdet-IC	4.2V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N42MA	-	VDD4210MNTA	Vdet-IC	4.2V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N42SA	-	VDD4210SNTA	Vdet-IC	4.2V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N42T	-	CM7P61N-42-T	Vdet-IC	4.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N43	-	82N43-AE3-5	Vdet-IC	4.3V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N43	-	XC61CN3402M	Vdet-IC	3.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
N43	-	XE61CN3445MR	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
N431A	-	VDA4310NTA	Vdet-IC	4.3V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N43B	-	FC61N432MG	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N43B	-	ML61N432M	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N43G	-	82N43G-AE3-5	Vdet-IC	4.3V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N43L	-	82N43L-AE3-5	Vdet-IC	4.3V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N43LA	-	VDD4310LNTA	Vdet-IC	4.3V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N43MA	-	VDD4310MNTA	Vdet-IC	4.3V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N43SA	-	VDD4310SNTA	Vdet-IC	4.3V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N43T	-	CM7P61N-43-T	Vdet-IC	4.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N44	-	82N44-AE3-5	Vdet-IC	4.4V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N44	-	LN809N3041M	Vdet-IC	3.08V±1%, Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Nln
N441A	-	VDA4410NTA	Vdet-IC	4.4V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N44B	-	FC61N442MG	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N44B	-	ML61N442M	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N44G	-	82N44G-AE3-5	Vdet-IC	4.4V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N44L	-	82N44L-AE3-5	Vdet-IC	4.4V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N44LA	-	VDD4410LNTA	Vdet-IC	4.4V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N44MA	-	VDD4410MNTA	Vdet-IC	4.4V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N44SA	-	VDD4410SNTA	Vdet-IC	4.4V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N44T	-	CM7P61N-44-T	Vdet-IC	4.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N45	-	82N45-AE3-5	Vdet-IC	4.5V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N45	-	LN61FN3412M	Vdet-IC	3.4V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
N45	-	LN809N3011M	Vdet-IC	3.08V±1%, Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Nln
N45	-	S72N45SF	Vdet-IC	4.5V±3.0%, +Reset OCO	SOT-23F	18vdc	VD6	3b	Auk
N45	-	S72N45UF	Vdet-IC	4.5V±3.0%, +Reset OCO	SOT-323F	18vdc	VD6	3a	Auk
N45	-	TC51N3402ECB	Vdet-IC	3.4V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
N45	-	XC61FN3412M	Vdet-IC	3.4V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
N45	-	XC61HN3412MR	Vdet-IC	3.4V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
N451A	-	VDA4510NTA	Vdet-IC	4.5V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N45B	-	FC61N452MG	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N45B	-	ML61N452M	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N45G	-	82N45G-AE3-5	Vdet-IC	4.5V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N45L	-	82N45L-AE3-5	Vdet-IC	4.5V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N45LA	-	VDD4510LNTA	Vdet-IC	4.5V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N45MA	-	VDD4510MNTA	Vdet-IC	4.5V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N45SA	-	VDD4510SNTA	Vdet-IC	4.5V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N45T	-	CM7P61N-45-T	Vdet-IC	4.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N46	-	82N46-AE3-5	Vdet-IC	4.6V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N46	-	LN61FN3442M	Vdet-IC	3.4V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
N46	-	XC61FN3442M	Vdet-IC	3.4V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
N46	-	XC61HN3442MR	Vdet-IC	3.4V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
N461A	-	VDA4610NTA	Vdet-IC	4.6V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N46B	-	FC61N462MG	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N46B	-	ML61N462M	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N46G	-	82N46G-AE3-5	Vdet-IC	4.6V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N46L	-	82N46L-AE3-5	Vdet-IC	4.6V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N46LA	-	VDD4610LNTA	Vdet-IC	4.6V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N46MA	-	VDD4610MNTA	Vdet-IC	4.6V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N46SA	-	VDD4610SNTA	Vdet-IC	4.6V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N46T	-	CM7P61N-46-T	Vdet-IC	4.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N47	-	82N47-AE3-5	Vdet-IC	4.7V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N47	-	LN61FN3452M	Vdet-IC	3.4V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
N47	-	XC61FN3452M	Vdet-IC	3.4V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
N47	-	XC61HN3452MR	Vdet-IC	3.4V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
N471A	-	VDA4710NTA	Vdet-IC	4.7V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N47B	-	FC61N472MG	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N47B	-	ML61N472M	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N47G	-	82N47G-AE3-5	Vdet-IC	4.7V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N47L	-	82N47L-AE3-5	Vdet-IC	4.7V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N47LA	-	VDD4710LNTA	Vdet-IC	4.7V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N47MA	-	VDD4710MNTA	Vdet-IC	4.7V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N47SA	-	VDD4710SNTA	Vdet-IC	4.7V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N47T	-	CM7P61N-47-T	Vdet-IC	4.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N48	-	82N48-AE3-5	Vdet-IC	4.8V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N481A	-	VDA4810NTA	Vdet-IC	4.8V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N48B	-	FC61N482MG	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N48B	-	ML61N482M	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N48G	-	82N48G-AE3-5	Vdet-IC	4.8V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N48L	-	82N48L-AE3-5	Vdet-IC	4.8V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N48LA	-	VDD4810LNTA	Vdet-IC	4.8V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N48MA	-	VDD4810MNTA	Vdet-IC	4.8V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N48SA	-	VDD4810SNTA	Vdet-IC	4.8V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N48T	-	CM7P61N-48-T	Vdet-IC	4.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N49	-	82N49-AE3-5	Vdet-IC	4.9V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N491A	-	VDA4910NTA	Vdet-IC	4.9V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N49B	-	FC61N492MG	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N49B	-	ML61N492M	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N49G	-	82N49G-AE3-5	Vdet-IC	4.9V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N49L	-	82N49L-AE3-5	Vdet-IC	4.9V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N49LA	-	VDD4910LNTA	Vdet-IC	4.9V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N49MA	-	VDD4910MNTA	Vdet-IC	4.9V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N49SA	-	VDD4910SNTA	Vdet-IC	4.9V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N49T	-	CM7P61N-49-T	Vdet-IC	4.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N4A	-	ILC5061AIC34X	Vdet-IC	3.4V±1%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
N4A	-	ILC5061AM34X	Vdet-IC	3.4V±1%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
N4ADG	-	LM4041GADAE3	Vref-IC	µPower, Precision, Shunt, Adj. 1.24..10V±1%	SOT-23	16du	RF2	3a	Utc
N5	-	2SC1654-5	Si-npn	Sw, HV-drive, 180V, 50mA, 150mW, B=90..180, 120MHz	SOT-23	16ta	-	3a	Nec
N5	-	AP8821N-55GC	Vdet-IC	5.5V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
N5	-	AP8821N-55GT	Vdet-IC	5.5V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
N5	-	AP8821N-55PC	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
N5	-	AP8821N-55PT	Vdet-IC	5.5V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
N5	-	BL8060CB3TR15	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N5	-	DRC9143E	Si-npn-Digi	Switching, 50V, 100mA, 125mW, R1/R2=4.7k/4.7k	SSMini3-F3-B	18ta	-	3a	Pan
N5	-	ELM7645LAB	Vdet-IC	4.5V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
N5	-	KRC118S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=2k2/10k	SOT-23	16ta	-	3f	Kec
N5	-	KRC418	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/10k	SOT-323	16ta	-	3f	Kec
N5	-	KRC418E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/10k	SOT-490	18ta	-	3f	Kec
N5	-	KRC418V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/10k	VSM	18ta	-	3f	Kec
N5	-	LM4040A50IDC	Vref-IC	µPower, Precision, Shunt, 5.00V±0.1%	SC-70	16dk	RF1	3d	Ti
N5	-	MMBC1654N5	Si-npn	Sw, HV drive, 180V, 50mA, 150mW, B=50-130, 120MHz	SOT-23	16ta	-	3a	Sam
N5	-	MMBZ5265BW	Z-diode	62V±5%, Izt=2.0mA, Zzt=185Ω, 200mW	SOT-323	16dc	-	3c	Pjt
N5	-	R1100D251C	LVR-IC	µ-low Icc, 2.5V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
N5	-	R3111N552C	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
N5	-	R3130N46DC5	Vdet-IC	4.6V±1.5%, -Reset ODO, 200ms	SOT-23	16vdc	VD6	3b	Ric
N5	-	RT1N144C	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10/47k	SC-59	16ta	-	3a	Mit
N5	-	RT1N144M	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10/47k	SOT-323	16ta	-	3a	Mit
N5	-	RT1N144U	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 200MHz, R1/R2=10/47k	SC-75A	16ta	-	3a	Mit
N5	-	TC54VN3502ECB	Vdet-IC	3.5V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
N5	cg	BL8060CB3TR35	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N5	ch	BL8060CB3TR25	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N5	ci	BL8060CB3TR45	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N5	cj	BL8060CB3TR55	LVR-IC	LDO, 5.5V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N50	-	82N50-AE3-5	Vdet-IC	5.0V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N501A	-	VDA5010NTA	Vdet-IC	5.0V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N509	-	BL8504CB3TR09N	Vdet-IC	0.9V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N50B	-	FC61N502MG	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N50B	-	ML61N502M	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N50G	-	82N50G-AE3-5	Vdet-IC	5.0V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N50L	-	82N50L-AE3-5	Vdet-IC	5.0V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N50LA	-	VDD5010LNTA	Vdet-IC	5.0V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N50MA	-	VDD5010MNTA	Vdet-IC	5.0V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N50SA	-	VDD5010SNTA	Vdet-IC	5.0V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N50T	-	CM7P61N-50-T	Vdet-IC	5.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N51	-	82N51-AE3-5	Vdet-IC	5.1V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N51	-	LN809N2951M	Vdet-IC	2.93V±1%, Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Nln
N510	-	BL8504CB3TR10N	Vdet-IC	1.0V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N511	-	BL8504CB3TR11N	Vdet-IC	1.1V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N511A	-	VDA5110NTA	Vdet-IC	5.1V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N512	-	BL8504CB3TR12N	Vdet-IC	1.2V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N513	-	BL8504CB3TR13N	Vdet-IC	1.3V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N514	-	BL8504CB3TR14N	Vdet-IC	1.4V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N515	-	BL8504CB3TR15N	Vdet-IC	1.5V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N516	-	BL8504CB3TR16N	Vdet-IC	1.6V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N517	-	BL8504CB3TR17N	Vdet-IC	1.7V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N518	-	BL8504CB3TR18N	Vdet-IC	1.8V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N519	-	BL8504CB3TR19N	Vdet-IC	1.9V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N51B	-	FC61N512MG	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N51B	-	ML61N512M	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N51G	-	82N51G-AE3-5	Vdet-IC	5.1V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N51L	-	82N51L-AE3-5	Vdet-IC	5.1V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N51LA	-	VDD5110LNTA	Vdet-IC	5.1V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N51MA	-	VDD5110MNTA	Vdet-IC	5.1V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N51SA	-	VDD5110SNTA	Vdet-IC	5.1V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N51T	-	CM7P61N-51-T	Vdet-IC	5.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N52	-	82N52-AE3-5	Vdet-IC	5.2V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N520	-	BL8504CB3TR20N	Vdet-IC	2.0V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N521	-	BL8504CB3TR21N	Vdet-IC	2.1V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N521A	-	VDA5210NTA	Vdet-IC	5.2V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N522	-	BL8504CB3TR22N	Vdet-IC	2.2V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N523	-	BL8504CB3TR23N	Vdet-IC	2.3V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N524	-	BL8504CB3TR24N	Vdet-IC	2.4V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N525	-	BL8504CB3TR25N	Vdet-IC	2.5V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N526	-	BL8504CB3TR26N	Vdet-IC	2.6V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N527	-	BL8504CB3TR27N	Vdet-IC	2.7V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N528	-	BL8504CB3TR28N	Vdet-IC	2.8V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N529	-	BL8504CB3TR29N	Vdet-IC	2.9V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N52B	-	FC61N522MG	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N52B	-	ML61N522M	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N52G	-	82N52G-AE3-5	Vdet-IC	5.2V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N52L	-	82N52L-AE3-5	Vdet-IC	5.2V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N52LA	-	VDD5210LNTA	Vdet-IC	5.2V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N52MA	-	VDD5210MNTA	Vdet-IC	5.2V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N52SA	-	VDD5210SNTA	Vdet-IC	5.2V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N52T	-	CM7P61N-52-T	Vdet-IC	5.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N53	-	82N53-AE3-5	Vdet-IC	5.3V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N53	-	XC61CN3502M	Vdet-IC	3.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
N53	-	XE61CN3545MR	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
N530	-	BL8504CB3TR30N	Vdet-IC	3.0V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N531	-	BL8504CB3TR31N	Vdet-IC	3.1V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N531A	-	VDA5310NTA	Vdet-IC	5.3V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N532	-	BL8504CB3TR32N	Vdet-IC	3.2V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N533	-	BL8504CB3TR33N	Vdet-IC	3.3V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N534	-	BL8504CB3TR34N	Vdet-IC	3.4V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N535	-	BL8504CB3TR35N	Vdet-IC	3.5V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N536	-	BL8504CB3TR36N	Vdet-IC	3.6V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N537	-	BL8504CB3TR37N	Vdet-IC	3.7V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N538	-	BL8504CB3TR38N	Vdet-IC	3.8V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N539	-	BL8504CB3TR39N	Vdet-IC	3.9V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N53B	-	FC61N532MG	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N53B	-	ML61N532M	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N53G	-	82N53G-AE3-5	Vdet-IC	5.3V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N53L	-	82N53L-AE3-5	Vdet-IC	5.3V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N53LA	-	VDD5310LNTA	Vdet-IC	5.3V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N53MA	-	VDD5310MNTA	Vdet-IC	5.3V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N53SA	-	VDD5310SNTA	Vdet-IC	5.3V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N53T	-	CM7P61N-53-T	Vdet-IC	5.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N54	-	82N54-AE3-5	Vdet-IC	5.4V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N54	-	LN809N2941M	Vdet-IC	2.93V±1%, Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Nln
N54	-	SO2221A	Si-npn	GP, 75V, 800mA, 500mW, >250MHz, B>20	SOT-23	16ta	-	3a	Ste
N540	-	BL8504CB3TR40N	Vdet-IC	4.0V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N541	-	BL8504CB3TR41N	Vdet-IC	4.1V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N541A	-	VDA5410NTA	Vdet-IC	5.4V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N542	-	BL8504CB3TR42N	Vdet-IC	4.2V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N543	-	BL8504CB3TR43N	Vdet-IC	4.3V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N544	-	BL8504CB3TR44N	Vdet-IC	4.4V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N545	-	BL8504CB3TR45N	Vdet-IC	4.5V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N546	-	BL8504CB3TR46N	Vdet-IC	4.6V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N547	-	BL8504CB3TR47N	Vdet-IC	4.7V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N548	-	BL8504CB3TR48N	Vdet-IC	4.8V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N549	-	BL8504CB3TR49N	Vdet-IC	4.9V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N54B	-	FC61N542MG	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N54B	-	ML61N542M	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N54G	-	82N54G-AE3-5	Vdet-IC	5.4V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N54L	-	82N54L-AE3-5	Vdet-IC	5.4V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N54LA	-	VDD5410LNTA	Vdet-IC	5.4V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N54MA	-	VDD5410MNTA	Vdet-IC	5.4V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N54SA	-	VDD5410SNTA	Vdet-IC	5.4V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N54T	-	CM7P61N-54-T	Vdet-IC	5.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N55	-	82N55-AE3-5	Vdet-IC	5.5V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N55	-	LN61FN3512M	Vdet-IC	3.5V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
N55	-	LN809N2911M	Vdet-IC	2.93V±1%, Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Nln
N55	-	TC51N3502ECB	Vdet-IC	3.5V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
N55	-	XC61FN3512M	Vdet-IC	3.5V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
N55	-	XC61HN3512MR	Vdet-IC	3.5V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
N550	-	BL8504CB3TR50N	Vdet-IC	5.0V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N551	-	BL8504CB3TR51N	Vdet-IC	5.1V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N551A	-	VDA5510NTA	Vdet-IC	5.5V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N552	-	BL8504CB3TR52N	Vdet-IC	5.2V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N553	-	BL8504CB3TR53N	Vdet-IC	5.3V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N554	-	BL8504CB3TR54N	Vdet-IC	5.4V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N555	-	BL8504CB3TR55N	Vdet-IC	5.5V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N556	-	BL8504CB3TR56N	Vdet-IC	5.6V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N557	-	BL8504CB3TR57N	Vdet-IC	5.7V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N558	-	BL8504CB3TR58N	Vdet-IC	5.8V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N559	-	BL8504CB3TR59N	Vdet-IC	5.9V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N55B	-	FC61N552MG	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N55B	-	ML61N552M	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N55G	-	82N55G-AE3-5	Vdet-IC	5.5V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N55L	-	82N55L-AE3-5	Vdet-IC	5.5V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N55LA	-	VDD5510LNTA	Vdet-IC	5.5V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N55MA	-	VDD5510MNTA	Vdet-IC	5.5V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N55SA	-	VDD5510SNTA	Vdet-IC	5.5V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N55T	-	CM7P61N-55-T	Vdet-IC	5.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N56	-	82N56-AE3-5	Vdet-IC	5.6V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N56	-	LN61FN3542M	Vdet-IC	3.5V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
N56	-	XC61FN3542M	Vdet-IC	3.5V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
N56	-	XC61HN3542MR	Vdet-IC	3.5V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
N560	-	BL8504CB3TR60N	Vdet-IC	6.0V±3%, -Reset ODO	SOT-23	16vdy	VD6	3a	Shb
N561A	-	VDA5610NTA	Vdet-IC	5.6V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N56B	-	FC61N562MG	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N56B	-	ML61N562M	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N56G	-	82N56G-AE3-5	Vdet-IC	5.6V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N56L	-	82N56L-AE3-5	Vdet-IC	5.6V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N56LA	-	VDD5610LNTA	Vdet-IC	5.6V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N56MA	-	VDD5610MNTA	Vdet-IC	5.6V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N56SA	-	VDD5610SNTA	Vdet-IC	5.6V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N56T	-	CM7P61N-56-T	Vdet-IC	5.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N57	-	82N57-AE3-5	Vdet-IC	5.7V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N57	-	LN61FN3552M	Vdet-IC	3.5V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
N57	-	XC61FN3552M	Vdet-IC	3.5V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
N57	-	XC61HN3552MR	Vdet-IC	3.5V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
N571A	-	VDA5710NTA	Vdet-IC	5.7V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N57B	-	FC61N572MG	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N57B	-	ML61N572M	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N57G	-	82N57G-AE3-5	Vdet-IC	5.7V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N57L	-	82N57L-AE3-5	Vdet-IC	5.7V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N57LA	-	VDD5710LNTA	Vdet-IC	5.7V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N57MA	-	VDD5710MNTA	Vdet-IC	5.7V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N57SA	-	VDD5710SNTA	Vdet-IC	5.7V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N57T	-	CM7P61N-57-T	Vdet-IC	5.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N58	-	82N58-AE3-5	Vdet-IC	5.8V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N581A	-	VDA5810NTA	Vdet-IC	5.8V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N58B	-	FC61N582MG	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N58B	-	ML61N582M	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N58G	-	82N58G-AE3-5	Vdet-IC	5.8V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N58L	-	82N58L-AE3-5	Vdet-IC	5.8V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N58LA	-	VDD5810LNTA	Vdet-IC	5.8V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N58MA	-	VDD5810MNTA	Vdet-IC	5.8V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N58SA	-	VDD5810SNTA	Vdet-IC	5.8V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N58T	-	CM7P61N-58-T	Vdet-IC	5.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N59	-	82N59-AE3-5	Vdet-IC	5.9V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N591A	-	VDA5910NTA	Vdet-IC	5.9V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N59B	-	FC61N592MG	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N59B	-	ML61N592M	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N59G	-	82N59G-AE3-5	Vdet-IC	5.9V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N59L	-	82N59L-AE3-5	Vdet-IC	5.9V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N59LA	-	VDD5910LNTA	Vdet-IC	5.9V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N59MA	-	VDD5910MNTA	Vdet-IC	5.9V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N59SA	-	VDD5910SNTA	Vdet-IC	5.9V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N59T	-	CM7P61N-59-T	Vdet-IC	5.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N6	-	2SC1654-6	Si-npn	Sw, HV-drive, 180V, 50mA, 150mW, B=135..270, 120MHz	SOT-23	16ta	-	3a	Nec
N6	-	AP8821N-56GC	Vdet-IC	5.6V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
N6	-	AP8821N-56GT	Vdet-IC	5.6V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
N6	-	AP8821N-56PC	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
N6	-	AP8821N-56PT	Vdet-IC	5.6V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
N6	-	BFS25A	Si-npn	UHF, 8V, 6.5mA, 32mW, 5GHz	SOT-323	16ta	-	3a	Phi
N6	-	BL8060CB3TR16	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N6	-	DRC9143X	Si-npn-Digi	Switching, 50V, 100mA, 125mW, R1/R2=4.7k/10k	SSMini3-F3-B	18ta	-	3a	Pan
N6	-	ELM7646LAB	Vdet-IC	4.6V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
N6	-	KRC119S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4k7k/10k	SOT-23	16ta	-	3f	Kec
N6	-	KRC419	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7k/10k	SOT-323	16ta	-	3f	Kec
N6	-	KRC419E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7k/10k	SOT-490	18ta	-	3f	Kec
N6	-	KRC419V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7k/10k	VSM	18ta	-	3f	Kec
N6	-	MMBC1654N6	Si-npn	Switch, HV drive, 180V, 50mA, 150mW, B=50-130, 120MHz	SOT-23	16ta	-	3a	Sam
N6	-	R1100D261C	LVR-IC	µ-low Icc, 2.6V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
N6	-	R3111N562C	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
N6	-	RT1N430C	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=4k7	SC-59	16ta	-	3a	Mit
N6	-	RT1N430M	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=4k7	SOT-323	16ta	-	3a	Mit
N6	-	RT1N430U	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=4k7	SC-75A	16ta	-	3a	Mit
N6	-	TC54VN3602ECB	Vdet-IC	3.6V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
N6	cg	BL8060CB3TR36	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N6	ch	BL8060CB3TR26	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N6	ci	BL8060CB3TR46	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N60	-	82N60-AE3-5	Vdet-IC	6.0V±2% -Reset ODO	SOT-23	16vdb	VD6	3a	Utc
N60	-	DDTD113EC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=1k/1k	SOT-23	16ta	-	3d	Di
N60	-	DDTD113EU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R22=1k/1k	SOT-323	16ta	-	3d	Di
N601A	-	VDA6010NTA	Vdet-IC	6.0V±1%, -Reset ODO	SOT-23	16vdb	VD6	3p	Ans
N609	-	BL8506-09NRM	Vdet-IC	0.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N609	-	LC9006CB3TR09N	Vdet-IC	0.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N60B	-	FC61N602MG	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N60B	-	ML61N602M	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N60G	-	82N60G-AE3-5	Vdet-IC	6.0V±2% -Reset ODO, halogen free	SOT-23	16vdb	VD6	3a	Utc
N60L	-	82N60L-AE3-5	Vdet-IC	6.0V±2% -Reset ODO, lead free	SOT-23	16vdb	VD6	3a	Utc
N60LA	-	VDD6010LNTA	Vdet-IC	6.0V±1%, -Reset ODO, 80..400ms	SOT-23	16vdb	VD6	3p	Ans
N60MA	-	VDD6010MNTA	Vdet-IC	6.0V±1%, -Reset ODO, 50..200ms	SOT-23	16vdb	VD6	3p	Ans
N60SA	-	VDD6010SNTA	Vdet-IC	6.0V±1%, -Reset ODO, 10..50ms	SOT-23	16vdb	VD6	3p	Ans
N60T	-	CM7P61N-60-T	Vdet-IC	6.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N61	-	DDTD123EC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3d	Di
N61	-	DDTD123EU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=2.2k/2.2k	SOT-323	16ta	-	3d	Di
N61	-	LN809N2651M	Vdet-IC	2.63V±1%, Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Nln
N610	-	BL8506-10NRM	Vdet-IC	1.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N610	-	LC9006CB3TR10N	Vdet-IC	1.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N611	-	BL8506-11NRM	Vdet-IC	1.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N611	-	LC9006CB3TR11N	Vdet-IC	1.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N612	-	BL8506-12NRM	Vdet-IC	1.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N612	-	LC9006CB3TR12N	Vdet-IC	1.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N613	-	BL8506-13NRM	Vdet-IC	1.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N613	-	LC9006CB3TR13N	Vdet-IC	1.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N614	-	BL8506-14NRM	Vdet-IC	1.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N614	-	LC9006CB3TR14N	Vdet-IC	1.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N615	-	BL8506-15NRM	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N615	-	LC9006CB3TR15N	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N616	-	BL8506-16NRM	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N616	-	LC9006CB3TR16N	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N617	-	BL8506-17NRM	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N617	-	LC9006CB3TR17N	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N618	-	BL8506-18NRM	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N618	-	LC9006CB3TR18N	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N619	-	BL8506-19NRM	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N619	-	LC9006CB3TR19N	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N61B	-	FC61N612MG	Vdet-IC	6.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N61B	-	ML61N612M	Vdet-IC	6.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N61T	-	CM7P61N-61-T	Vdet-IC	6.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N62	-	DDTD143EC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3d	Di
N62	-	DDTD143EU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3d	Di
N620	-	BL8506-20NRM	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N620	-	LC9006CB3TR20N	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N621	-	BL8506-21NRM	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N621	-	LC9006CB3TR21N	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N622	-	BL8506-22NRM	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N622	-	LC9006CB3TR22N	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N623	-	BL8506-23NRM	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N623	-	LC9006CB3TR23N	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N624	-	BL8506-24NRM	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N624	-	LC9006CB3TR24N	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N625	-	BL8506-25NRM	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N625	-	LC9006CB3TR25N	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N626	-	BL8506-26NRM	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N626	-	LC9006CB3TR26N	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N627	-	BL8506-27NRM	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N627	-	LC9006CB3TR27N	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N628	-	BL8506-28NRM	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N628	-	LC9006CB3TR28N	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N629	-	BL8506-29NRM	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N629	-	LC9006CB3TR29N	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N62B	-	FC61N622MG	Vdet-IC	6.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N62B	-	ML61N622M	Vdet-IC	6.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N62T	-	CM7P61N-62-T	Vdet-IC	6.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N63	-	DDTD114EC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-23	16ta	-	3d	Di
N63	-	DDTD114EU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-323	16ta	-	3d	Di
N63	-	XC61CN3602M	Vdet-IC	3.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
N63	-	XE61CN3645MR	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
N630	-	BL8506-30NRM	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N630	-	LC9006CB3TR30N	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N631	-	BL8506-31NRM	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N631	-	LC9006CB3TR31N	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N632	-	BL8506-32NRM	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N632	-	LC9006CB3TR32N	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N633	-	BL8506-33NRM	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N633	-	LC9006CB3TR33N	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N634	-	BL8506-34NRM	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N634	-	LC9006CB3TR34N	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N635	-	BL8506-35NRM	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N635	-	LC9006CB3TR35N	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N636	-	BL8506-36NRM	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N636	-	LC9006CB3TR36N	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N637	-	BL8506-37NRM	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N637	-	LC9006CB3TR37N	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N638	-	BL8506-38NRM	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N638	-	LC9006CB3TR38N	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N639	-	BL8506-39NRM	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N639	-	LC9006CB3TR39N	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N63B	-	FC61N632MG	Vdet-IC	6.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N63B	-	ML61N632M	Vdet-IC	6.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N63T	-	CM7P61N-63-T	Vdet-IC	6.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N64	-	DDTD122JC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=0.22k/4.7k	SOT-23	16ta	-	3d	Di
N64	-	DDTD122JU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=0.22k/4.7k	SOT-323	16ta	-	3d	Di
N64	-	LN809N2641M	Vdet-IC	2.63V±1%, Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Nln
N640	-	BL8506-40NRM	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N640	-	LC9006CB3TR40N	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N641	-	BL8506-41NRM	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N641	-	LC9006CB3TR41N	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N642	-	BL8506-42NRM	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N642	-	LC9006CB3TR42N	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N643	-	BL8506-43NRM	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N643	-	LC9006CB3TR43N	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N644	-	BL8506-44NRM	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N644	-	LC9006CB3TR44N	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N645	-	BL8506-45NRM	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N645	-	LC9006CB3TR45N	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N646	-	BL8506-46NRM	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N646	-	LC9006CB3TR46N	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N647	-	BL8506-47NRM	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N647	-	LC9006CB3TR47N	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N648	-	BL8506-48NRM	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N648	-	LC9006CB3TR48N	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N649	-	BL8506-49NRM	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N649	-	LC9006CB3TR49N	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N64B	-	FC61N642MG	Vdet-IC	6.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N64B	-	ML61N642M	Vdet-IC	6.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N64T	-	CM7P61N-64-T	Vdet-IC	6.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N65	-	DDTD113ZC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=1k/10k	SOT-23	16ta	-	3d	Di
N65	-	DDTD113ZU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=1k/10k	SOT-323	16ta	-	3d	Di
N65	-	LN61FN3612M	Vdet-IC	3.6V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
N65	-	LN809N2611M	Vdet-IC	2.63V±1%, Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Nln
N65	-	TC51N3602ECB	Vdet-IC	3.6V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
N65	-	XC61FN3612M	Vdet-IC	3.6V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
N65	-	XC61HN3612MR	Vdet-IC	3.6V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
N650	-	BL8506-50NRM	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N650	-	LC9006CB3TR50N	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N651	-	BL8506-51NRM	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N651	-	LC9006CB3TR51N	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N652	-	BL8506-52NRM	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N652	-	LC9006CB3TR52N	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N653	-	BL8506-53NRM	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N653	-	LC9006CB3TR53N	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N654	-	BL8506-54NRM	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N654	-	LC9006CB3TR54N	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N655	-	BL8506-55NRM	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N655	-	LC9006CB3TR55N	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N656	-	BL8506-56NRM	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N656	-	LC9006CB3TR56N	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N657	-	BL8506-57NRM	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N657	-	LC9006CB3TR57N	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N658	-	BL8506-58NRM	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N658	-	LC9006CB3TR58N	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N659	-	BL8506-59NRM	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N659	-	LC9006CB3TR59N	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N65B	-	FC61N652MG	Vdet-IC	6.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N65B	-	ML61N652M	Vdet-IC	6.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N65T	-	CM7P61N-65-T	Vdet-IC	6.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N66	-	DDTD123YC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=2.2k/10k	SOT-23	16ta	-	3d	Di
N66	-	DDTD123YU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=2.2k/10k	SOT-323	16ta	-	3d	Di
N66	-	LN61FN3642M	Vdet-IC	3.6V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
N66	-	XC61FN3642M	Vdet-IC	3.6V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
N66	-	XC61HN3642MR	Vdet-IC	3.6V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
N660	-	BL8506-60NRM	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Shb
N660	-	LC9006CB3TR60N	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Lch
N66B	-	FC61N662MG	Vdet-IC	6.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N66B	-	ML61N662M	Vdet-IC	6.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N66T	-	CM7P61N-66-T	Vdet-IC	6.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N67	-	DDTD133HC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=3.3k/10k	SOT-23	16ta	-	3d	Di
N67	-	DDTD133HU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=3.3k/10k	SOT-323	16ta	-	3d	Di
N67	-	LN61FN3652M	Vdet-IC	3.6V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
N67	-	XC61FN3652M	Vdet-IC	3.6V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
N67	-	XC61HN3652MR	Vdet-IC	3.6V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
N67B	-	FC61N672MG	Vdet-IC	6.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N67B	-	ML61N672M	Vdet-IC	6.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N67T	-	CM7P61N-67-T	Vdet-IC	6.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N68B	-	FC61N682MG	Vdet-IC	6.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N68B	-	ML61N682M	Vdet-IC	6.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N68T	-	CM7P61N-68-T	Vdet-IC	6.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N69	-	DDTD123TC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1=2.2k	SOT-23	16ta	-	3d	Di
N69	-	DDTD123TU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1=2.2k	SOT-323	16ta	-	3d	Di
N69B	-	FC61N692MG	Vdet-IC	6.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N69B	-	ML61N692M	Vdet-IC	6.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N69T	-	CM7P61N-69-T	Vdet-IC	6.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N7	-	2SC1654-7	Si-npn	Sw, HV-drive, 180V, 50mA, 150mW, B=200..400, 120MHz	SOT-23	16ta	-	3a	Nec
N7	-	AP8821N-57GC	Vdet-IC	5.7V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
N7	-	AP8821N-57GT	Vdet-IC	5.7V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
N7	-	AP8821N-57PC	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
N7	-	AP8821N-57PT	Vdet-IC	5.7V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
N7	-	BL8060CB3TR17	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N7	-	DRC9143Y	Si-npn-Digi	Switching, 50V, 100mA, 125mW, R1/R2=4.7k/22k	SSMini3-F3-B	18ta	-	3a	Pan
N7	-	ELM7647LAB	Vdet-IC	4.7V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
N7	-	ILC5061IC37X	Vdet-IC	3.7V±2%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
N7	-	ILC5061M37X	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
N7	-	KN4L4Z	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1=47k	SOT-416	16ta	-	3a	Nec
N7	-	KRC120S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/4k7	SOT-23	16ta	-	3f	Kec
N7	-	KRC420	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/4k7	SOT-323	16ta	-	3f	Kec
N7	-	KRC420E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/4k7	SOT-490	18ta	-	3f	Kec
N7	-	KRC420V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/4k7	VSM	18ta	-	3f	Kec
N7	-	MMBC1654N7	Si-npn	Switch, HV drive, 180V, 50mA, 150mW, B=100-220, 120MHz	SOT-23	16ta	-	3a	Sam
N7	-	R1100D271C	LVR-IC	µ-low Icc, 2.7V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
N7	-	R3111N572C	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
N7	-	RT1N140C	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=10k	SC-59	16ta	-	3a	Mit
N7	-	RT1N140M	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=10k	SOT-323	16ta	-	3a	Mit
N7	-	RT1N140T	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 200MHz, R1=10k	T-USM	18ta	-	3a	Mit
N7	-	RT1N140U	Si-npn-Digi	Sw, 50V, 100mA, 125mW, 200MHz, R1=10k	SC-75A	16ta	-	3a	Mit
N7	-	TC54VN3702ECB	Vdet-IC	3.7V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
N7	cg	BL8060CB3TR37	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N7	ch	BL8060CB3TR27	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N7	ci	BL8060CB3TR47	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N70	-	DDTD143TC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1=4.7k	SOT-23	16ta	-	3d	Di
N70	-	DDTD143TU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1=4.7k	SOT-323	16ta	-	3d	Di
N70B	-	FC61N702MG	Vdet-IC	7.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Fis
N70B	-	ML61N702M	Vdet-IC	7.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Mlc
N70T	-	CM7P61N-70-T	Vdet-IC	7.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3a	Can
N71	-	DDTD114TC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1=10k	SOT-23	16ta	-	3d	Di
N71	-	DDTD114TU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1=4.7k	SOT-323	16ta	-	3d	Di
N71	-	SO3904	Si-npn	GP, 60V, 100mA, 200mW, B= 100..300, >300MHz	SOT-23	16ta	-	3a	Ste
N72	-	DDTD114GC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R2=10k	SOT-23	16ta	-	3d	Di
N72	-	DDTD114GU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R2=10k	SOT-323	16ta	-	3d	Di
N72	-	SO3903	Si-npn	GP, 60V, 200mA, 250mW, B=50..150, >300MHz	SOT-23	16ta	-	3a	Ste
N73	-	XC61CN3702M	Vdet-IC	3.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
N73	-	XE61CN3745MR	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
N75	-	DDTD122LC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=0.22k/10k	SOT-23	16ta	-	3d	Di
N75	-	DDTD122LU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=0.22k/10k	SOT-323	16ta	-	3d	Di
N75	-	LN61FN3712M	Vdet-IC	3.7V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
N75	-	TC51N3702ECB	Vdet-IC	3.7V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
N75	-	XC61FN3712M	Vdet-IC	3.7V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
N75	-	XC61HN3712MR	Vdet-IC	3.7V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
N76	-	DDTD142JC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=0.47k/10k	SOT-23	16ta	-	3d	Di
N76	-	DDTD142JU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=0.47k/10k	SOT-323	16ta	-	3d	Di
N76	-	LN61FN3742M	Vdet-IC	3.7V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
N76	-	XC61FN3742M	Vdet-IC	3.7V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
N76	-	XC61HN3742MR	Vdet-IC	3.7V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
N77	-	DDTD122TC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1=0.22k	SOT-23	16ta	-	3d	Di
N77	-	DDTD122TU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1=0.22k	SOT-323	16ta	-	3d	Di
N77	-	LN61FN3752M	Vdet-IC	3.7V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
N77	-	XC61FN3752M	Vdet-IC	3.7V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
N77	-	XC61HN3752MR	Vdet-IC	3.7V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
N78	-	DDTD142TC	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1=0.47k	SOT-23	16ta	-	3d	Di
N78	-	DDTD142TU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1=0.47k	SOT-323	16ta	-	3d	Di
N79	-	SO5550	Si-npn	HV, 140V, 600mA, 225mW, B=80..250, >300MHz	SOT-23	16ta	-	3a	Ste
N7A	-	ILC5061AIC37X	Vdet-IC	3.7V±1%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
N7A	-	ILC5061AM37X	Vdet-IC	3.7V±1%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
N8	-	AP8821N-58GC	Vdet-IC	5.8V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
N8	-	AP8821N-58GT	Vdet-IC	5.8V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
N8	-	AP8821N-58PC	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
N8	-	AP8821N-58PT	Vdet-IC	5.8V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N8	-	BL8060CB3TR18	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N8	-	BZX84C5V1	Z-diode	4.8..5.4V, Zzt=60Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
N8	-	DAP202U	Si-diode	Dual, Sw, 80V, 100mA, 200mW, <10ns	SOT-323	16df	-	3b	Ons
N8	-	DRC9143Z	Si-npn-Digi	Switching, 50V, 100mA, 125mW, R1/R2=4.7k/47k	SSMini3-F3-B	18ta	-	3a	Pan
N8	-	ELM7648LAB	Vdet-IC	4.8V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
N8	-	KRC121S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/10k	SOT-23	16ta	-	3f	Kec
N8	-	KRC421	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/10k	SOT-323	16ta	-	3f	Kec
N8	-	KRC421E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/10k	SOT-490	18ta	-	3f	Kec
N8	-	KRC421V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/10k	VSM	18ta	-	3f	Kec
N8	-	R1100D281C	LVR-IC	µ-low Icc, 2.8V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
N8	-	R3111N582C	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
N8	-	TC54VN3802ECB	Vdet-IC	3.8V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
N8	cg	BL8060CB3TR38	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N8	ch	BL8060CB3TR28	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N8	ci	BL8060CB3TR48	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N80	-	SO5551	Si-npn	GP, 180V, 200mA, 200mW, B=80..250, <300MHz	SOT-23	16ta	-	3a	Ste
N81	-	DDTC122LE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=0.22k/10k	SOT-523	16ta	-	3d	Di
N81	-	DDTC122LU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=0.22k/10k	SOT-23	16ta	-	3d	Di
N81	-	SO2369A	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120, 500MHz	SOT-23	16ta	-	3a	Ste
N82	-	DDTC142JE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=0.47k/10k	SOT-523	16ta	-	3d	Di
N82	-	DDTC142JU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=0.47k/10k	SOT-323	16ta	-	3d	Di
N83	-	DDTC122TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=2.2k	SOT-523	16ta	-	3d	Di
N83	-	DDTC122TU	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=2.2k	SOT-323	16ta	-	3d	Di
N83	-	XC61CN3802M	Vdet-IC	3.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
N83	-	XE61CN3845MR	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
N84	-	DDTC142TE	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=0.47k	SOT-523	16ta	-	3d	Di
N84	-	DDTC142TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=0.47k	SOT-323	16ta	-	3d	Di
N85	-	LN61FN3812M	Vdet-IC	3.8V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
N85	-	TC51N3802ECB	Vdet-IC	3.8V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
N85	-	XC61FN3812M	Vdet-IC	3.8V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
N85	-	XC61HN3812MR	Vdet-IC	3.8V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
N86	-	LN61FN3842M	Vdet-IC	3.8V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
N86	-	XC61FN3842M	Vdet-IC	3.8V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
N86	-	XC61HN3842MR	Vdet-IC	3.8V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
N87	-	LN61FN3852M	Vdet-IC	3.8V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
N87	-	XC61FN3852M	Vdet-IC	3.8V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
N87	-	XC61HN3852MR	Vdet-IC	3.8V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
N9	-	1SS372	Si-diode	Dual, Schottky, 10V, 100mA	SOT-323	16dl	-	3a	Tos
N9	-	1SS374	Si-diode	Dual, Schottky, 10V, 100mA	SC-59	16dl	-	3a	Tos
N9	-	AP8821N-59GC	Vdet-IC	5.9V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
N9	-	AP8821N-59GT	Vdet-IC	5.9V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
N9	-	AP8821N-59PC	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
N9	-	AP8821N-59PT	Vdet-IC	5.9V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
N9	-	BL8060CB3TR19	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N9	-	BZX84C24	Z-diode	22.8..25.6V, Zzt=70Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
N9	-	DAN222	Si-diode	Dual, Sw, 80V, 100mA, 150mW, <4ns	SOT-416	16dg	-	3b	Ons
N9	-	ELM7649LAB	Vdet-IC	4.9V±2%, -Reset PPO, 250ms	SOT-23	16vdc	VD7	3d	Elm
N9	-	KRC122S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=100k/100k	SOT-23	16ta	-	3f	Kec
N9	-	KRC422	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=100k/100k	SOT-323	16ta	-	3f	Kec
N9	-	KRC422E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=100k/100k	SOT-490	18ta	-	3f	Kec
N9	-	KRC422V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=100k/100k	VSM	18ta	-	3f	Kec
N9	-	R1100D291C	LVR-IC	µ-low Icc, 2.9V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
N9	-	R3111N592C	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
N9	-	TC54VN3902ECB	Vdet-IC	3.9V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
N9	cg	BL8060CB3TR39	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N9	ch	BL8060CB3TR29	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N9	ci	BL8060CB3TR49	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-23	16cg	VR1	3ab	Shb
N91	-	SO642	Si-npn	HV, Vid, 300V, 100mA, 310mW, B>25, 50MHz	SOT-23	16ta	-	3a	Ste
N93	-	XC61CN3902M	Vdet-IC	3.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
N93	-	XE61CN3945MR	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
N95	-	LN61FN3912M	Vdet-IC	3.9V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
N95	-	S72N25SF	Vdet-IC	2.5V±3.0%, +Reset OCO	SOT-23F	18vdc	VD6	3b	Auk
N95	-	TC51N3902ECB	Vdet-IC	3.9V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
N95	-	XC61FN3912M	Vdet-IC	3.9V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
N95	-	XC61HN3912MR	Vdet-IC	3.9V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
N96	-	LN61FN3942M	Vdet-IC	3.9V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
N96	-	XC61FN3942M	Vdet-IC	3.9V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
N96	-	XC61HN3942MR	Vdet-IC	3.9V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
N97	-	LN61FN3952M	Vdet-IC	3.9V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
N97	-	XC61FN3952M	Vdet-IC	3.9V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N97	-	XC61HN3952MR	Vdet-IC	3.9V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
na	-	PT7M6246NLC3	Vdet-IC	4.6V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
na	-	PT7M6246NLTA3	Vdet-IC	4.6V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
na	cf	PT7M6246NLC3E	Vdet-IC	4.6V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
na	cf	PT7M6246NLTA3E	Vdet-IC	4.6V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
nA	-	BU45L474G	Vdet-IC	4.7V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
Na	-	BD49L49G	Vdet-IC	4.9V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
NA	-	2SC5374	Si-npn	VHF/UHF Osc/Amp, 20V, 100mA, 100mW, B>110, 5.2GHz	SMCP	16ta	-	3a	San
NA	-	2SC5375	Si-npn	VHF/UHF Osc/Amp, 20V, 100mA, 150mW, B>110, 5.2GHz	MCP	16ta	-	3a	San
NA	-	2SC5538	Si-npn	VHF/UHF, 20V, 100mA, 100mW, B=110..200, 5.2GHz	SSFP	18ta	-	3a	San
NA	-	BFS20	Si-npn	RF, 30V, 25mA, 250mW, B=85, 450MHz	SOT-23	16ta	-	3a	Sil
NA	-	DRC9143T	Si-npn-Digi	Switching, 50V, 100mA, 125mW, R1=4.7k	SSMini3-F3-B	18ta	-	3a	Pan
NA	-	ETC1810-5U	Vdet-IC	4.62V±5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Etc
NA	-	FMMTA05R	Si-npn	GP, 60V, 500mA, 350mW, B>100, >100MHz	SOT-23	16te	-	3a	Zx
NA	-	KRC101S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4k7/4k7	SOT-23	16ta	-	3f	Kec
NA	-	KRC401	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7/4k7	SOT-323	16ta	-	3f	Kec
NA	-	KRC401E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7/4k7	SOT-490	18ta	-	3f	Kec
NA	-	KRC401V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7/4k7	VSM	18ta	-	3f	Kec
NA	-	MIC1810-5U	Vdet-IC	4.62V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3d	Mcr
NA	-	MMBT100	Si-npn	GP, 75V, 500mA, 350mW, B=80..400, 250MHz	SOT-23	16ta	-	3a	F
NA	-	RN1443A	Si-npn-Digi	Mute, 50V, 300mA, 300mW, R1=22k, B=200..700	SOT-346	16ta	-	3a	Tos
NA	cb	MIC1810-5UY	Vdet-IC	4.62V±1.5%, -Reset PPO, Pb. Free	SOT-23	16vda	VD7	3d	Mcr
NA1	-	FN4A4M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/10k	SC-59	16ta	-	3a	Nec
NA1	-	GN4A4M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/10k	SOT-323	16ta	-	3a	Nec
NA1	-	MMBT100A	Si-npn	GP, 75V, 500mA, 350mW, B=240..600, 250MHz	SOT-23	16ta	-	3a	F
NAA	-	BC817-16	Si-npn	Sw, 50V, 800mA, 200mW, B=110..250, 100MHz	SOT-23	16ta	-	3a	Auk
NAA	-	BC817F-16	Si-pnp	Sw, 50V, 800mA, 200mW, B=110..250, 100MHz	SOT-23F	18ta	-	3a	Auk
NAB	-	BC817-25	Si-pnp	Sw, 50V, 800mA, 200mW, B=160..400, 100MHz	SOT-23	16ta	-	3a	Auk
NAB	-	BC817F-25	Si-pnp	Sw, 50V, 800mA, 200mW, B=160..400, 100MHz	SOT-23F	18ta	-	3a	Auk
NAC	-	BC817-40	Si-pnp	Sw, 50V, 800mA, 200mW, B=250..630, 100MHz	SOT-23	16ta	-	3a	Auk
NAC	-	BC817F-40	Si-pnp	Sw, 50V, 800mA, 200mW, B=250..630, 100MHz	SOT-23F	18ta	-	3a	Auk
nb	-	PT7M6247CLC3	Vdet-IC	4.7V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
nb	-	PT7M6247CLTA3	Vdet-IC	4.7V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
nb	cf	PT7M6247CLC3E	Vdet-IC	4.7V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
nb	cf	PT7M6247CLTA3E	Vdet-IC	4.7V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
nB	-	BU45L484G	Vdet-IC	4.8V±1%, -Reset ODO, Td=400ms	SSOP-3	16vda	VD6	3q	Rhm
Nb	-	BD49L50G	Vdet-IC	5.0V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
NB	-	2SCR523EB	Si-npn	GP, Sw, 50V, 100mA, 150mW, B=120..560, 350MHz	EMT3F	18ta	-	3a	Rhm
NB	-	2SCR523M	Si-npn	GP, Sw, 50V, 100mA, 150mW, B=120..560, 350MHz	VMT3	18ta	-	3a	Rhm
NB	-	2SCR523UB	Si-npn	GP, Sw, 50V, 100mA, 200mW, B=120..560, 350MHz	UMT3F	18ta	-	3a	Rhm
NB	-	BF599	Si-npn	VHF, IF, 40V, 25mA, 200mW, B>40, 550MHz	SOT-23	16ta	-	3a	Sie
NB	-	CHT42PT	Si-npn	Vid, 300V, 500mA, B=40..300, 50MHz	SOT-23	16ta	-	3a	Chm
NB	-	CHTA42LPT	Si-npn	Vid, 300V, 500mA, B>40, 50MHz	SOT-23	16ta	-	3a	Chm
NB	-	DRC5114E	Si-npn-Digi	Switching, 50V, 100mA, 150mW, R1/R2=10k/10k	SMini3-F2-B	18ta	-	3a	Pan
NB	-	ETC1810-10U	Vdet-IC	4.37V±5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Etc
NB	-	FMMTA55R	Si-pnp	AF-Drv, 60V, 500mA, 300mW, B>100, >50MHz	SOT-23	16te	-	3a	Zx
NB	-	KRC102S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-23	16ta	-	3f	Kec
NB	-	KRC402	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/10k	SOT-323	16ta	-	3f	Kec
NB	-	KRC402E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/10k	SOT-490	18ta	-	3f	Kec
NB	-	KRC402V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/10k	VSM	18ta	-	3f	Kec
NB	-	MIC1810-10U	Vdet-IC	4.37V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3d	Mcr
NB	-	RN1443B	Si-npn-Digi	Mute, 50V, 300mA, 300mW, R1=22k, B=350..1200	SOT-346	16ta	-	3a	Tos
NB	cb	MIC1810-10UY	Vdet-IC	4.37V±1.5%, -Reset PPO, Pb. Free	SOT-23	16vda	VD7	3d	Mcr
NB1	-	FN4F4M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/22k	SC-59	16ta	-	3a	Nec
NB1	-	GN4F4M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/22k	SOT-323	16ta	-	3a	Nec
nc	-	PT7M6247CHC3	Vdet-IC	4.7V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
nc	-	PT7M6247CHTA3	Vdet-IC	4.7V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
nc	cf	PT7M6247CHC3E	Vdet-IC	4.7V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
nc	cf	PT7M6247CHTA3E	Vdet-IC	4.7V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
nC	-	BU46L234G	Vdet-IC	2.3V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
Nc	-	BD49L51G	Vdet-IC	5.1V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
NC	-	2SC2411KPT-Q	Si-npn	Sw, 40V, 500mA, 225mW, B=120..270, 250MHz	SOT-23	16ta	-	3a	Chm
NC	-	2SCR522EB	Si-npn	GP, Sw, 20V, 200mA, 150mW, B=120..560, 400MHz	EMT3F	18ta	-	3a	Rhm
NC	-	2SCR522M	Si-npn	GP, Sw, 20V, 200mA, 150mW, B=120..560, 400MHz	VMT3	18ta	-	3a	Rhm
NC	-	2SCR522UB	Si-npn	GP, Sw, 20V, 200mA, 200mW, B=120..560, 400MHz	UMT3F	18ta	-	3a	Rhm
NC	-	ETC1810-15U	Vdet-IC	4.12V±5%, -Reset PPO	SOT-23	16vdb	VD7	3a	Etc
NC	-	KRC103S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/22k	SOT-23	16ta	-	3f	Kec
NC	-	KRC403	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=22k/22k	SOT-323	16ta	-	3f	Kec
NC	-	KRC403E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=22k/22k	SOT-490	18ta	-	3f	Kec
NC	-	KRC403V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=22k/22k	VSM	18ta	-	3f	Kec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NC	-	MIC1810-15U	Vdet-IC	4.12V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3d	Mcr
NC	cb	MIC1810-15UY	Vdet-IC	4.12V±1.5%, -Reset PPO, Pb. Free	SOT-23	16vda	VD7	3d	Mcr
NC1	-	FN4L4M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/47k	SC-59	16ta	-	3a	Nec
NC1	-	GN4L4M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/47k	SOT-323	16ta	-	3a	Nec
NCp	-	BF840	Si-npn	AM/FM-RF, 40V, 25mA, 250mW, B=67..222, 380MHz	SOT-23	16ta	-	3a	PhH
NCs	-	BF840	Si-npn	AM/FM-RF, 40V, 25mA, 250mW, B=67..222, 380MHz	SOT-23	16ta	-	3a	Sie
NCt	-	BF840	Si-npn	AM/FM-RF, 40V, 25mA, 250mW, B=67..222, 380MHz	SOT-23	16ta	-	3a	PhM
NCW	-	BF840	Si-npn	AM/FM-RF, 40V, 25mA, 250mW, B=67..222, 380MHz	SOT-23	16ta	-	3a	PhC
nd	-	PT7M6247NLC3	Vdet-IC	4.7V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
nd	-	PT7M6247NLTA3	Vdet-IC	4.7V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
nd	cf	PT7M6247NLC3E	Vdet-IC	4.7V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
nd	cf	PT7M6247NLTA3E	Vdet-IC	4.7V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
nD	-	BU46L244G	Vdet-IC	2.4V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
Nd	-	BD49L52G	Vdet-IC	5.2V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
ND	-	2SC2412KPT-Q	Si-npn	Sw, 50V, 150mA, 200mW, B=120..270, 180MHz	SOT-23	16ta	-	3a	Chm
ND	-	2SC5539	Si-npn	VHF/UHF, 20V, 100mA, 100mW, B=90..200, 7.5Hz	SSFP	18ta	-	3a	San
ND	-	2SD1306-D	Si-npn	AF, Mute, 30V, 700mA, 150mW, B=250..500	SC-59A	16ta	-	3a	Ren
ND	-	BF841	Si-npn	AF, 40V, 25mA, 280mW, B=35..125, >380MHz	SOT-23	16ta	-	3a	Sie
ND	-	DRC5114T	Si-npn-Digi	Switching, 50V, 100mA, 150mW, R1=10k	SMini3-F2-B	18ta	-	3a	Pan
ND	-	KRC104S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/47k	SOT-23	16ta	-	3f	Kec
ND	-	KRC404	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/47k	SOT-323	16ta	-	3f	Kec
ND	-	KRC404E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/47k	SOT-490	18ta	-	3f	Kec
ND	-	KRC404V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/47k	VSM	18ta	-	3f	Kec
ND	-	MIC1815-10U	Vdet-IC	2.88V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3d	Mcr
ND	cb	MIC1815-10UY	Vdet-IC	2.88V±1.5%, -Reset PPO, Pb. Free	SOT-23	16vda	VD7	3d	Mcr
ND1	-	FN4L3M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/4k7	SC-59	16ta	-	3a	Nec
ND1	-	GN4L3M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/4k7	SOT-323	16ta	-	3a	Nec
NDp	-	BF841	Si-npn	AF, 40V, 25mA, 280mW, B=35..125, >380MHz	SOT-23	16ta	-	3a	Phi
ne	-	PT7M6248CLC3	Vdet-IC	4.8V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
ne	-	PT7M6248CLTA3	Vdet-IC	4.8V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
ne	cf	PT7M6248CLC3E	Vdet-IC	4.8V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
ne	cf	PT7M6248CLTA3E	Vdet-IC	4.8V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
nE	-	BU46L254G	Vdet-IC	2.5V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
Ne	-	BD49L53G	Vdet-IC	5.3V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
NE	-	2SC4097PT-Q	Si-npn	Sw, 40V, 500mA, 200mW, B=120..270, 250MHz	SOT-323	16ta	-	3a	Chm
NE	-	2SD1306-E	Si-npn	AF, Mute, 30V, 700mA, 150mW, B=400..800	SC-59A	16ta	-	3a	Ren
NE	-	KRC105S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=2k2/47k	SOT-23	16ta	-	3f	Kec
NE	-	KRC405	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/47k	SOT-323	16ta	-	3f	Kec
NE	-	KRC405E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/47k	SOT-490	18ta	-	3f	Kec
NE	-	KRC405V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/47k	VSM	18ta	-	3f	Kec
NE	-	MIC1815-20U	Vdet-IC	2.55V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3d	Mcr
NE	cb	MIC1815-20UY	Vdet-IC	2.55V±1.5%, -Reset PPO, Pb. Free	SOT-23	16vda	VD7	3d	Mcr
NE1	-	FN4L3N	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/10k	SC-59	16ta	-	3a	Nec
NE1	-	GN4L3N	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=4k7/10k	SOT-323	16ta	-	3a	Nec
nf	-	PT7M6248CHC3	Vdet-IC	4.8V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
nf	-	PT7M6248CHTA3	Vdet-IC	4.8V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
nf	cf	PT7M6248CHC3E	Vdet-IC	4.8V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
nf	cf	PT7M6248CHTA3E	Vdet-IC	4.8V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
nF	-	BU46L264G	Vdet-IC	2.6V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
Nf	-	BD49L54G	Vdet-IC	5.4V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
NF	-	2SC5645	Si-npn	UHF-S-band LN, 9V, 30mA, 100mW, B=100..160, 10GHz	SMCP	18ta	-	3a	San
NF	-	2SC5646	Si-npn	UHF-S-band LN, 9V, 30mA, 100mW, B=100..160, 10GHz	SSFP	18ta	-	3a	San
NF	-	DRC9124X	Si-npn-Digi	Switching, 50V, 100mA, 125mW, R1/R2=22k/47k	SSMini3-F3-B	18ta	-	3a	Pan
NF	-	KRC106S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4k7/47k	SOT-23	16ta	-	3f	Kec
NF	-	KRC406	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7/47k	SOT-323	16ta	-	3f	Kec
NF	-	KRC406E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7/47k	SOT-490	18ta	-	3f	Kec
NF	-	KRC406V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7/47k	VSM	18ta	-	3f	Kec
NF1	-	FN4L3Z	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=4k7	SC-59	16ta	-	3a	Nec
NF1	-	GN4L3Z	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=4k7	SOT-323	16ta	-	3a	Nec
ng	-	PT7M6248NLC3	Vdet-IC	4.8V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
ng	-	PT7M6248NLTA3	Vdet-IC	4.8V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
ng	cf	PT7M6248NLC3E	Vdet-IC	4.8V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
ng	cf	PT7M6248NLTA3E	Vdet-IC	4.8V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
nG	-	BU46L274G	Vdet-IC	2.7V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
Ng	-	BD49L55G	Vdet-IC	5.5V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
NG	-	CH3904WPT	Si-npn	AF, Sw, 40V, 200mA, B=100..300, 300MHz	SOT-323	16ta	-	3a	Chm
NG1	-	FN4A3Q	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=1k/10k	SC-59	16ta	-	3a	Nec
NG1	-	GN4A3Q	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=1k/10k	SOT-323	16ta	-	3a	Nec
nh	-	PT7M6249CLC3	Vdet-IC	4.9V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
nh	-	PT7M6249CLTA3	Vdet-IC	4.9V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
nh	cf	PT7M6249CLC3E	Vdet-IC	4.9V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
nh	cf	PT7M6249CLTA3E	Vdet-IC	4.9V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
nH	-	BU46L284G	Vdet-IC	2.8V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
Nh	-	BD49L56G	Vdet-IC	5.6V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
NH	-	KRC107S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/47k	SOT-23	16ta	-	3f	Kec
NH	-	KRC407	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/47k	SOT-323	16ta	-	3f	Kec
NH	-	KRC407E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/47k	SOT-490	18ta	-	3f	Kec
NH	-	KRC407V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/47k	VSM	18ta	-	3f	Kec
NH1	-	FN4A4P	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/47k	SC-59	16ta	-	3a	Nec
NH1	-	GN4A4P	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/47k	SOT-323	16ta	-	3a	Nec
ni	-	PT7M6249CHC3	Vdet-IC	4.9V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
ni	-	PT7M6249CHTA3	Vdet-IC	4.9V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
ni	cf	PT7M6249CHC3E	Vdet-IC	4.9V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
ni	cf	PT7M6249CHTA3E	Vdet-IC	4.9V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
NI	-	CHBTA13PT	Si-npn-Darl	AF, Sw, 30V, 1.2A, B>10000, 125MHz	SOT-23	16ta	-	3a	Chm
NI	-	KRC108S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/47k	SOT-23	16ta	-	3f	Kec
NI	-	KRC408	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=22k/47k	SOT-323	16ta	-	3f	Kec
NI	-	KRC408E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=22k/47k	SOT-490	18ta	-	3f	Kec
NI	-	KRC408V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=22k/47k	VSM	18ta	-	3f	Kec
nj	-	PT7M6249NLC3	Vdet-IC	4.9V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
nj	-	PT7M6249NLTA3	Vdet-IC	4.9V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
nj	cf	PT7M6249NLC3E	Vdet-IC	4.9V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
nj	cf	PT7M6249NLTA3E	Vdet-IC	4.9V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
NJ	-	KRC109S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/22k	SOT-23	16ta	-	3f	Kec
NJ	-	KRC409	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/22k	SOT-323	16ta	-	3f	Kec
NJ	-	KRC409E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/22k	SOT-490	18ta	-	3f	Kec
NJ	-	KRC409V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/22k	VSM	18ta	-	3f	Kec
NJ1	-	FN4F4N	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/47k	SC-59	16ta	-	3a	Nec
NJ1	-	GN4F4N	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/47k	SOT-323	16ta	-	3a	Nec
nk	-	PT7M6250CLC3	Vdet-IC	5.0V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Pti
nk	-	PT7M6250CLTA3	Vdet-IC	5.0V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Pti
nk	cf	PT7M6250CLC3E	Vdet-IC	5.0V±1.5%, -Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
nk	cf	PT7M6250CLTA3E	Vdet-IC	5.0V±1.5%, -Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
nK	-	BU46L294G	Vdet-IC	2.9V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
Nk	-	BD49L57G	Vdet-IC	5.7V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
NK	-	2SC5654	Si-npn	DC-DC conv., 20V, 1A, 150mW, 180mhZ, B=160..560	SMini3-G1	16ta	-	3a	Pan
NK	-	DRC9144W	Si-npn-Digi	Switching, 50V, 100mA, 125mW, R1/R2=47k/22k	SSMini3-F3-B	18ta	-	3a	Pan
NK	-	DRC9152Z	Si-npn-Digi	Switching, 50V, 100mA, 125mW, R1/R2=510R/5.1k	SSMini3-F3-B	18ta	-	3a	Pan
NK	-	KRC110S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=4k7	SOT-23	16ta	-	3f	Kec
NK	-	KRC410	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=4k7	SOT-323	16ta	-	3f	Kec
NK	-	KRC410E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=4k7	SOT-490	18ta	-	3f	Kec
NK	-	KRC410V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=4k7	VSM	18ta	-	3f	Kec
NK1	-	FN4L4L	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/22k	SC-59	16ta	-	3a	Nec
NK1	-	GN4L4L	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/22k	SOT-323	16ta	-	3a	Nec
nl	-	PT7M6250CHC3	Vdet-IC	5.0V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Pti
nl	-	PT7M6250CHTA3	Vdet-IC	5.0V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Pti
nl	cf	PT7M6250CHC3E	Vdet-IC	5.0V±1.5%, +Reset PPO, Lead free	SC-70	16vdc	VD7	3b	Pti
nl	cf	PT7M6250CHTA3E	Vdet-IC	5.0V±1.5%, +Reset PPO, Lead free	SOT-23	16vdb	VD7	3b	Pti
NL	-	2SA1520	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=2k2/10k	SOT-23	16ta	-	3a	San
NL	-	DRC9144E	Si-npn-Digi	Switching, 50V, 100mA, 125mW, R1/R2=47k/47k	SSMini3-F3-B	18ta	-	3a	Pan
NL	-	DRC9144V	Si-npn-Digi	Switching, 50V, 100mA, 125mW, R1/R2=47k/10k	SSMini3-F3-B	18ta	-	3a	Pan
NL1	-	FN4A4Z	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=10k	SC-59	16ta	-	3a	Nec
NL1	-	GN4A4Z	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=10k	SOT-323	16ta	-	3a	Nec
nm	-	PT7M6250NLC3	Vdet-IC	5.0V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3b	Pti
nm	-	PT7M6250NLTA3	Vdet-IC	5.0V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Pti
nm	cf	PT7M6250NLC3E	Vdet-IC	5.0V±1.5%, -Reset ODO, Lead free	SC-70	16vdc	VD6	3b	Pti
nm	cf	PT7M6250NLTA3E	Vdet-IC	5.0V±1.5%, -Reset ODO, Lead free	SOT-23	16vdb	VD6	3b	Pti
nM	-	BU46L304G	Vdet-IC	3.0V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
Nm	-	BD49L58G	Vdet-IC	5.8V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
NM	-	KRC111S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	SOT-23	16ta	-	3f	Kec
NM	-	KRC411	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=10k	SOT-323	16ta	-	3f	Kec
NM	-	KRC411E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=10k	SOT-490	18ta	-	3f	Kec
NM	-	KRC411V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=10k	VSM	18ta	-	3f	Kec
NM1	-	FN4F4Z	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=22k	SC-59	16ta	-	3a	Nec
NM1	-	GN4F4Z	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=22k	SOT-323	16ta	-	3a	Nec
nN	-	BU46L314G	Vdet-IC	3.1V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
Nn	-	BD49L59G	Vdet-IC	5.9V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
NN	-	KRC112S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=100k	SOT-23	16ta	-	3f	Kec
NN	-	KRC412	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=100k	SOT-323	16ta	-	3f	Kec
NN	-	KRC412E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=100k	SOT-490	18ta	-	3f	Kec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NN	-	KRC412V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=100k	VSM	18ta	-	3f	Kec
NN1	-	FN4L4Z	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=47k	SC-59	16ta	-	3a	Nec
NN1	-	GN4L4Z	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1=47k	SOT-323	16ta	-	3a	Nec
NN5	-	2SC5310-5	Si-npn	DC/DC-Conv, 30V, 1A, 250mW, B=135..270, 150MHz	SOT-23	16ta	-	3a	San
NN6	-	2SC5310-6	Si-npn	DC/DC-Conv, 30V, 1A, 250mW, B=200..400, 150MHz	SOT-23	16ta	-	3a	San
NNA	-	KRC234S	Si-npn-Digi	Sw, 30V, 600mA, 200mW, 200MHz, R1=4.7k	SOT-23	16ta	-	3f	Kec
NNB	-	KRC235S	Si-npn-Digi	Sw, 30V, 600mA, 200mW, 200MHz, R1=6.8k	SOT-23	16ta	-	3f	Kec
NO	-	2SC3138-O	Si-npn	HV, Sw, 200V, 50mA, 150mW, 100MHz, B=70..140	SC-59	16ta	-	3a	Tos
NO	-	KRC113S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=22k	SOT-23	16ta	-	3f	Kec
NO	-	KRC413	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=22k	SOT-323	16ta	-	3f	Kec
NO	-	KRC413E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=22k	SOT-490	18ta	-	3f	Kec
NO	-	KRC413V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=22k	VSM	18ta	-	3f	Kec
nP	-	BU46L324G	Vdet-IC	3.2V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
Np	-	BD49L60G	Vdet-IC	6.0V±1%, -Reset PPO	SSOP-3	16vda	VD7	3q	Rhm
NP	-	DRC9144T	Si-npn-Digi	Switching, 50V, 100mA, 125mW, R1=47k	SSMini3-F3-B	18ta	-	3a	Pan
NP	-	KRC114S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=47k	SOT-23	16ta	-	3f	Kec
NP	-	KRC414	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=47k	SOT-323	16ta	-	3f	Kec
NP	-	KRC414E	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=47k	SOT-490	18ta	-	3f	Kec
NP	-	KRC414V	Si-npn-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=47k	VSM	18ta	-	3f	Kec
NP1	-	FN4F3M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=2k2/2k2	SC-59	16ta	-	3a	Nec
NP1	-	GN4F3M	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=2k2/2k2	SOT-323	16ta	-	3a	Nec
NQ	-	2SC6114-Q	Si-npn	AF, 50V, 100mA, 150mW, B=120..270, 130MHz	VMN3	19ta	-	3k	Rhm
NQ	-	KRC241S	Si-npn-Digi	Sw, 50V, 800mA, 200mW, 200MHz, R1/R2=1k/1k	SOT-23	16ta	-	3f	Kec
NQ1	-	FN4F3P	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=2k2/10k	SC-59	16ta	-	3a	Nec
NQ1	-	GN4F3P	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=2k2/10k	SOT-323	16ta	-	3a	Nec
nR	-	BU46L334G	Vdet-IC	3.3V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
NR	-	2SC6114-R	Si-npn	AF, 50V, 100mA, 150mW, B=180..390, 130MHz	VMN3	19ta	-	3k	Rhm
NR	-	2SD1679-R	Si-npn	AF, 18V, 500mA, 250mW, B=200..350, 170MHz	SC-59	16ta	-	3a	Pan
NR	-	AP7313-10SA	LVR-IC	LDO, 1.0V±2%, 150mA	SOT-23	16vj	VR1	3ba	Di
NR	-	KRC242S	Si-npn-Digi	Sw, 50V, 800mA, 200mW, 200MHz, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3f	Kec
NR1	-	FN4F3R	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=2k2/47k	SC-59	16ta	-	3a	Nec
NR1	-	GN4F3R	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=2k2/47k	SOT-323	16ta	-	3a	Nec
nS	-	BU46L344G	Vdet-IC	3.4V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
NS	-	2SB1527	Si-pnp-Digi+Di	Motor-Driver, 20V, 800mA, 200mW, 250MHz, B>70, R2=1kΩ	SOT-23	16ta	-	3a	San
NS	-	2SD1679-S	Si-npn	AF, 18V, 500mA, 250mW, B=300..500, 170MHz	SC-59	16ta	-	3a	Pan
NS	-	AP7313-12SA	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-23	16vj	VR1	3ba	Di
NS	-	KRC243S	Si-npn-Digi	Sw, 50V, 800mA, 200mW, 200MHz, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3f	Kec
NS	-	TN0200TS	n-MOSFET	V-MOS, LogL, 20V, 1.2A, <0.4Ω	SOT-23	16fh	-	3a	Six
NS1	-	FN4A4L	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/4k7	SC-59	16ta	-	3a	Nec
NS1	-	GN4A4L	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/4k7	SOT-323	16ta	-	3a	Nec
NS2	-	DMN2114SN	n-MOSFET	Sw, 20V, 1.2A, 500mW, 0.1Ω(500mA), 10/50ns	SC-59	16fh	-	3c	Di
NS5	-	2SA1973-5	Si-pnp	DC/DC-Conv, 30V, 1A, 250mW, B=135..240, 150MHz	SOT-23	16ta	-	3a	San
NS6	-	2SA1973-6	Si-pnp	DC/DC-Conv, 30V, 1A, 250mW, B=200..400, 150MHz	SOT-23	16ta	-	3a	San
nT	-	BU46L354G	Vdet-IC	3.5V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
NT	-	2SD1679-T	Si-npn	AF, 18V, 500mA, 250mW, B=400..800, 170MHz	SC-59	16ta	-	3a	Pan
NT	-	AP7313-15SA	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-23	16vj	VR1	3ba	Di
NT	-	CHT2222TPT	Si-npn	AF, Sw, 40V, 600mA, B=100..300, 300MHz	SOT-416	16ta	-	3a	Chm
NT	-	CHT4401TPT	Si-npn	AF, Sw, 40V, 600mA, B=100..300, 250MHz	SOT-416	16ta	-	3a	Chm
NT	-	KRC244S	Si-npn-Digi	Sw, 50V, 800mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-23	16ta	-	3f	Kec
NT1	-	FN4L4K	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/10k	SC-59	16ta	-	3a	Nec
NT1	-	GN4L4K	Si-pnp-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/10k	SOT-323	16ta	-	3a	Nec
NU	-	2SD1781KPT-R	Si-npn	AF, Sw, 32V, 800mA, B=180..390, 150MHz	SOT-23	16ta	-	3a	Chm
NU	-	AP7313-18SA	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-23	16vj	VR1	3ba	Di
NU	-	DRC9144G	Si-npn-Digi	Switching, 50V, 100mA, 125mW, R2=47k	SSMini3-F3-B	18ta	-	3a	Pan
NU	-	KRC245S	Si-npn-Digi	Sw, 50V, 800mA, 200mW, 200MHz, R1/R2=1k/10k	SOT-23	16ta	-	3f	Kec
NV	-	AP7313-20SA	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-23	16vj	VR1	3ba	Di
NV	-	CH847BPT-Q	Si-npn	AF, Sw, 45V, 100mA, B=110..220, 200MHz	SOT-23	16ta	-	3a	Chm
NV	-	KRC246S	Si-npn-Digi	Sw, 50V, 800mA, 200mW, 200MHz, R1/R2=2.2k/10k	SOT-23	16ta	-	3f	Kec
nW	-	BU46L364G	Vdet-IC	3.6V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
NW	-	AP7313-25SA	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-23	16vj	VR1	3ba	Di
NW	-	CH847BPT-S	Si-npn	AF, Sw, 45V, 100mA, B=420..800, 200MHz	SOT-23	16ta	-	3a	Chm
NW	-	KRC231S	Si-npn-Digi	Sw, 30V, 600mA, 200mW, 200MHz, R1=2.2k	SOT-23	16ta	-	3f	Kec
nX	-	BU46L374G	Vdet-IC	3.7V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
NX	-	AP7313-28SA	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-23	16vj	VR1	3ba	Di
nY	-	BU46L384G	Vdet-IC	3.8V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
NY	-	2SC3138-Y	Si-npn	HV, Sw, 200V, 50mA, 150mW, 100MHz, B=120..240	SC-59	16ta	-	3a	Tos
NY	-	AP7313-30SA	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-23	16vj	VR1	3ba	Di
NY	-	KRC232S	Si-npn-Digi	Sw, 30V, 600mA, 200mW, 200MHz, R1=5.6k	SOT-23	16ta	-	3f	Kec
NY2	-	2SC3774-2	Si-npn	UHF, LN, 20V, 70mA, 250mW, 5GHz, B=40..80	SOT-23	16ta	-	3a	San
NY2	-	2SC4404-2	Si-npn	UHF, Osc, 25V, 70mA, 150mW, B=40..80, 5GHz	MCP	16ta	-	3a	San

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NY3	-	2SC3774-3	Si-npn	UHF, LN, 20V, 70mA, 250mW, 5GHz, B=60..120	SOT-23	16ta	-	3a	San
NY3	-	2SC4404-3	Si-npn	UHF, Osc, 25V, 70mA, 150mW, B=60..120, 5GHz	MCP	16ta	-	3a	San
NY4	-	2SC3774-4	Si-npn	UHF, LN, 20V, 70mA, 250mW, 5GHz, B=100..200	SOT-23	16ta	-	3a	San
NY4	-	2SC4404-4	Si-npn	UHF, Osc, 25V, 70mA, 150mW, B=100..200, 5GHz	MCP	16ta	-	3a	San
NZ	-	AP7313-33SA	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-23	16vj	VR1	3ba	Di
NZ	-	BFS20R	Si-npn	RF, 30V, 25mA, 250mW, B=85, 450MHz	SOT-23	16ta	-	3a	Sie
NZ	-	KRC233S	Si-npn-Digi	Sw, 30V, 600mA, 200mW, 200MHz, R1=10k	SOT-23	16ta	-	3f	Kec
o	-	AX6903AA	Vdet-IC	4.63V±1.5%, -Reset PPO	SC-70	16vda	VD7	3b	Axl
O15	-	2SA1609-15	Si-pnp	GP, 160V, 50mA, B=135..270, 80MHz	SOT-23	16ta	-	3a	Nec
O16	-	2SA1609-16	Si-pnp	GP, 160V, 50mA, B=200..400, 80MHz	SOT-23	16ta	-	3a	Nec
O17	-	2SA1609-17	Si-pnp	GP, 160V, 50mA, B=300..600, 80MHz	SOT-23	16ta	-	3a	Nec
O1s	-	BBY66-05-01	C-diode	Dual, VCO-Tuning, 12V, 50mA, 12.7..68.5pF(4.5..1V)	SOT-23	16dg	-	3c	Inf
O2s	-	BBY66-05-02	C-diode	Dual, VCO-Tuning, 12V, 50mA, 12.7..71.5pF(4.5..1V)	SOT-23	16dg	-	3c	Inf
O4	-	2SA1331-4	Si-pnp	Sw, Hi-Sp, 60V, 150mA, 150mW, 100MHz, B=100..200	SOT-23	16ta	-	3a	San
O5	-	2SA1330-5	Si-pnp	Sw, Amp, HV, 200V, 100mA, 200mW, 120MHz, B=90..180	SOT-23	16ta	-	3a	Nec
O5	-	2SA1331-5	Si-pnp	Sw, Hi-Sp, 60V, 150mA, 150mW, 100MHz, B=140..280	SOT-23	16ta	-	3a	San
O6	-	2SA1330-6	Si-pnp	Sw, Amp, HV, 200V, 100mA, 200mW, 120MHz, B=135..270	SOT-23	16ta	-	3a	Nec
O6	-	2SA1331-6	Si-pnp	Sw, Hi-Sp, 60V, 150mA, 150mW, 100MHz, B=200..400	SOT-23	16ta	-	3a	San
O7	-	2SA1330-7	Si-pnp	Sw, Amp, HV, 200V, 100mA, 200mW, 120MHz, B=200..450	SOT-23	16ta	-	3a	Nec
O72	-	SO3903R	Si-npn	GP, 60V, 200mA, 250mW, B=50..150, >300MHz	SOT-23	16ta	-	3a	Ste
O80	-	SO5551R	Si-npn	GP, 180V, 200mA, 200mW, B=80..250, <300MHz	SOT-23	16te	-	3a	Ste
O9	-	1SS377	Si-diode	Dual, Schottky, 10V, 100mA	SC-59	16dg	-	3a	Tos
O9	-	1SS378	Si-diode	Dual, Schottky, 10V, 100mA	SOT-323	16dg	-	3a	Tos
O9	-	1SS385	Si-diode	Dual, Schottky, 10V, 100mA	SOT-416	16dg	-	3a	Tos
O9	-	1SS385F	Si-diode	Dual, Schottky, 10V, 100mA	SOT-490	18dg	-	3a	Tos
OBs	-	BBY66-05W	C-diode	Dual, VCO-Tuning, 12V, 50mA, 12.7..68.7pF(4.5..1V)	SOT-323	16dg	-	3c	Inf
OCs	-	BAR50-05	PIN-diode	Dual, RF-Att, 50V, 100mA, 250mW, Vf<1.1V(50mA), <0.5pF	SOT-23	16dg	-	3c	Inf
OL	-	2SA1521	Si-pnp-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=2k2/2k2	SOT-23	16ta	-	3a	San
OO	-	2SA1255-O	Si-pnp	HV, 200V, 50mA, 150mW, B=70..140, 100MHz	SC-59	16ta	-	3a	Tos
OT2	-	2SC4364-2	Si-npn	UHF, Mix/Osc, 25V, 30mA, 250mW, B=40..80, 3GHz	CP	16ta	-	3a	San
OT2	-	2SC4401-2	Si-npn	UHF, Mix/Osc, 25V, 30mA, 150mW, B=40..80, 3GHz	MCP	16ta	-	3a	San
OT3	-	2SC4364-3	Si-npn	UHF, Mix/Osc, 25V, 30mA, 250mW, B=60..120, 3GHz	CP	16ta	-	3a	San
OT3	-	2SC4401-3	Si-npn	UHF, Mix/Osc, 25V, 30mA, 150mW, B=60..120, 3GHz	MCP	16ta	-	3a	San
OT4	-	2SC4364-4	Si-npn	UHF, Mix/Osc, 25V, 30mA, 250mW, B=100..200, 3GHz	CP	16ta	-	3a	San
OT4	-	2SC4401-4	Si-npn	UHF, Mix/Osc, 25V, 30mA, 150mW, B=100..200, 3GHz	MCP	16ta	-	3a	San
OY	-	2SA1255-Y	Si-pnp	HV, 200V, 50mA, 150mW, B=120..240, 100MHz	SC-59	16ta	-	3a	Tos
OY2	-	2SC3775-2	Si-npn	UHF, LN, 20V, 100mA, 250mW, 5GHz, B=40..80	SOT-23	16ta	-	3a	San
OY2	-	2SC4405-2	Si-npn	UHF, LN, 20V, 100mA, 150mW, B=40..80, 5GHz	MCP	16ta	-	3a	San
OY3	-	2SC3775-3	Si-npn	UHF, LN, 20V, 100mA, 250mW, 5GHz, B=60..120	SOT-23	16ta	-	3a	San
OY3	-	2SC4405-3	Si-npn	UHF, LN, 20V, 100mA, 150mW, B=60..120, 5GHz	MCP	16ta	-	3a	San
OY4	-	2SC3775-4	Si-npn	UHF, LN, 20V, 100mA, 250mW, 5GHz, B=100..200	SOT-23	16ta	-	3a	San
OY4	-	2SC4405-4	Si-npn	UHF, LN, 20V, 100mA, 150mW, B=100..200, 5GHz	MCP	16ta	-	3a	San
p	-	AX6903BA	Vdet-IC	4.38V±1.5%, -Reset PPO	SC-70	16vda	VD7	3b	Axl
P	-	2SB1197-P	Si-pnp	AF, 40V, 800mA, 200mW, B=82..180, >50MHz	SOT-23	16ta	-	3a	Wtr
P	-	DAN202U	Si-diode	Dual, Sw, 80V, 300mA, 200mW, <1.5ns	SOT-323	16dg	-	3i	Rhm
P	-	DAP202U	Si-diode	Dual, Sw, 80V, 300mA, 200mW, <1.5ns	SOT-323	16df	-	3i	Rhm
P	-	DAP222	Si-diode	Dual, Sw, 80V, 300mA, 150mW, <1.5ns	SOT-416	16df	-	3i	Rhm
P	-	SB05W05C	Si-diode	Dual, SBR, HF, 50V, 500mA, Vf<0.55V(500mA), 24pF, 10ns	CP	16dg	-	3a	San
P	cr	ELM7535NEB	Vdet-IC	3.5V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
P	cs	ELM7535CEB	Vdet-IC	3.5V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
P0	-	AP8821N-60GC	Vdet-IC	6.0V±2%, -Reset ODO, Halogen-free	SOT-23	16vda	VD6	3bb	Anw
P0	-	AP8821N-60GT	Vdet-IC	6.0V±2%, -Reset ODO, Halogen-free	SC-70	16vda	VD6	3bb	Anw
P0	-	AP8821N-60PC	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23	16vda	VD6	3b	Anw
P0	-	AP8821N-60PT	Vdet-IC	6.0V±2%, -Reset ODO	SC-70	16vda	VD6	3b	Anw
P0	-	ELM7620HCB	Vdet-IC	2.0V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
P0	-	ELM9720CBB	Vdet-IC	2.0V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
P0	-	R1100D301C	LVR-IC	μ-low Icc, 3.0V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
P0	-	R3111N602C	Vdet-IC	6V±2%, -Reset ODO	SOT-23	16vdd	VD6	3d	Ric
P0	-	R3130N40HC	Vdet-IC	4V±1.5%, -Reset ODO, 400ms	SOT-23	16vdc	VD6	3b	Ric
P0	-	TC54VN4002ECB	Vdet-IC	4.0V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
P0	-	TP0101T	p-MOSFET	V-MOS, LogL, 12V, 3A, 1W, <0.65Ω	SOT-23	16fh	-	3a	Six
p01	-	PDTA143ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3a	NxH
p01	-	PDTA143EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3a	NxH
P01	-	DDTA113TCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=1k	SOT-23	16ta	-	3d	Di
P01	-	DDTA113TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=1k	SOT-523	16ta	-	3d	Di
P01	-	DDTA113TKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=1k	SC-59	16ta	-	3d	Di
P01	-	DDTA113TUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=1k	SOT-323	16ta	-	3d	Di
P01	-	SO2906	Si-pnp	GP, 60V, 600mA, 400mW, >200MHz, B>40	SOT-23	16ta	-	3a	Ste
P01	-	ZXTP5401FL	Si-pnp	Sw, HV, 160V, 600mA, 330mW, B=60..240, 100MHz	SOT-23	16ta	-	3a	Zx
p02	-	PDTC143ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3a	NxH

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
p02	-	PDTC143EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3a	NxH
P02	-	DDTA113ZCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=1k/10k	SOT-23	16ta	-	3d	Di
P02	-	DDTA113ZE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=1k/10k	SOT-523	16ta	-	3d	Di
P02	-	DDTA113ZKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=1k/10k	SC-59	16ta	-	3d	Di
P02	-	DDTA113ZUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=1k/10k	SOT-323	16ta	-	3d	Di
P02	-	ZXM61P02F	n-MOSFET	V-MOS, LogL, 20V, 0.9A, <0.6Ω	SOT-23	16fh	-	3a	Zx
p03	-	PDTA114ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k	SOT-23	16ta	-	3a	NxH
p03	-	PDTA114EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SOT-323	16ta	-	3a	NxH
P03	-	DDTA123TCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=2k2	SOT-23	16ta	-	3d	Di
P03	-	DDTA123TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=2k2	SOT-523	16ta	-	3d	Di
P03	-	DDTA123TKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=2k2	SC-59	16ta	-	3d	Di
P03	-	DDTA123TUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=2k2	SOT-323	16ta	-	3a	Di
P03	-	SO2907A	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Ste
P03	-	XC61CN4002M	Vdet-IC	4.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
P03	-	XE61CN4045MR	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
P03	-	ZXM61P03F	n-MOSFET	V-MOS, LogL, 30V, 1.1A, <0.55Ω	SOT-23	16fh	-	3a	Zx
p04	-	BZX84-A11	Z-diode	11V±1%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P04	-	DDTA123ECA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	Di
P04	-	DDTA123EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2k2/2k2	SOT-523	16ta	-	3a	Di
P04	-	DDTA123EKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/2k2	SC-59	16ta	-	3a	Di
P04	-	DDTA123EUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/2k2	SOT-323	16ta	-	3d	Di
P04	-	SST174	p-FET	Sw, 30V, 350mW, Idss=135mA, Rds(on)=85Ω, 15/20ns	SOT-23	16fj	-	3a	Cal
p05	-	PDTA124ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k	SOT-23	16ta	-	3a	NxH
p05	-	PDTA124EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SOT-323	16ta	-	3a	NxH
P05	-	DDTA123YCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/10k	SOT-23	16ta	-	3a	Di
P05	-	DDTA123YE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2k2/10k	SOT-523	16ta	-	3a	Di
P05	-	DDTA123YKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/10k	SC-59	16ta	-	3d	Di
P05	-	DDTA123YUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/10k	SOT-323	16ta	-	3d	Di
P05	-	LN61FN4012M	Vdet-IC	4.0V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
P05	-	SO2907	Si-pnp	GP, 40V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Ste
P05	-	SST175	p-FET	Sw, 30V, 350mW, Idss=70mA, Rds(on)=125Ω, 15/20ns	SOT-23	16fj	-	3a	Cal
P05	-	TC51N4002ECB	Vdet-IC	4.0V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
P05	-	XC61FN4012M	Vdet-IC	4.0V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
P05	-	XC61HN4012MR	Vdet-IC	4.0V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
p06	-	PDTC124EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SOT-323	16ta	-	3a	NxH
P06	-	DDTA123JCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/47k	SOT-23	16ta	-	3d	Di
P06	-	DDTA123JE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=2k2/47k	SOT-523	16ta	-	3d	Di
P06	-	DDTA123JKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/47k	SC-59	16ta	-	3a	Di
P06	-	DDTA123JUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/47k	SOT-323	16ta	-	3d	Di
P06	-	LN61FN4042M	Vdet-IC	4.0V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
P06	-	SO2894	Si-pnp	Sw, 12V, 200mA, 360mW, 23/43ns	SOT-23	16ta	-	3a	Ste
P06	-	SST176	p-FET	Sw, 30V, 350mW, Idss=35mA, Rds(on)=250Ω, 15/20ns	SOT-23	16fj	-	3a	Cal
P06	-	XC61FN4042M	Vdet-IC	4.0V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
P06	-	XC61HN4042MR	Vdet-IC	4.0V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
p07	-	PDTA144ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/47k	SOT-23	16ta	-	3a	NxH
p07	-	PDTA144EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SOT-323	16ta	-	3a	NxH
P07	-	DDTA143TCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4k7	SOT-23	16ta	-	3d	Di
P07	-	DDTA143TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=4k7	SOT-523	16ta	-	3d	Di
P07	-	DDTA143TKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4k7	SC-59	16ta	-	3d	Di
P07	-	DDTA143TUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4k7	SOT-323	16ta	-	3d	Di
P07	-	LN61FN4052M	Vdet-IC	4.0V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
P07	-	SST177	p-FET	Sw, 30V, 350mW, Idss=20mA, Rds(on)=300Ω, 15/20ns	SOT-23	16fj	-	3a	Cal
P07	-	XC61FN4052M	Vdet-IC	4.0V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
P07	-	XC61HN4052MR	Vdet-IC	4.0V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
p08	-	PDTC144ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/47k	SOT-23	16ta	-	3a	NxH
p08	-	PDTC144EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SOT-323	16ta	-	3a	NxH
P08	-	DDTA143ECA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/4k7	SOT-23	16ta	-	3d	Di
P08	-	DDTA143EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/4k7	SOT-523	16ta	-	3d	Di
P08	-	DDTA143EKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/4k7	SC-59	16ta	-	3d	Di
P08	-	DDTA143EUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/4k7	SOT-323	16ta	-	3d	Di
p09	-	PDTC114EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SOT-323	16ta	-	3a	NxH
P09	-	DDTA123XCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/10k	SOT-23	16ta	-	3a	Di
P09	-	DDTA123XE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/10k	SOT-523	16ta	-	3d	Di
P09	-	DDTA123XKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/10k	SC-59	16ta	-	3a	Di
P09	-	DDTA123XUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/10k	SOT-323	16ta	-	3a	Di
P09	-	DDTA143XCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	SOT-23	16ta	-	3d	Di
P09	-	DDTA143XE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=22k/47k	SOT-523	16ta	-	3d	Di
P09	-	DDTA143XKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	SC-59	16ta	-	3d	Di
P09	-	DDTA143XUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	SOT-323	16ta	-	3d	Di
P1	-	2SK1577-1	n-FET	VHF/UHF, 35V, 100mA, 150mW, Idss=30..50mA, Up<6V	SOT-23	16fa	-	3a	Soy





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P1	-	BFS42	Si-npn	AF/HF, 60/30V, 1A, >60MHz	SOT-323	16te	-	3a	Fer
P1	-	BZX84C11T	Z-diode	10.4..11.6V, Zzt=20Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
P1	-	CZRH3-55C11	Z-diode	11.0..11.60V, Zzt=20Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
P1	-	ELM7621HCB	Vdet-IC	2.1V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
P1	-	ELM9721CBB	Vdet-IC	2.1V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
P1	-	MMBZ5266BW	Z-diode	68V±5%, Izt=1.8mA, Zzt=230Ω, 200mW	SOT-323	16dc	-	3c	Pjt
P1	-	R1100D311C	LVR-IC	µ-low Icc, 3.1V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
P1	-	R3130N44HC	Vdet-IC	4.4V±1.5%, -Reset ODO, 400ms	SOT-23	16vdc	VD6	3b	Ric
P1	-	RT1P141C	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10k/10k	SC-59	16ta	-	3a	Mit
P1	-	RT1P141M	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10k/10k	SOT-323	16ta	-	3a	Mit
P1	-	RT1P141T	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 200MHz, R1/R2=10k/10k	T-USM	18ta	-	3a	Mit
P1	-	RT1P141U	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 200MHz, R1/R2=10k/10k	SC-75A	16ta	-	3a	Mit
P1	-	SST201	n-FET	AF, LN, 40V, 350mW, Idss=0.2..1mA, Up<1.5V	SOT-23	16fj	-	3a	Six
P1	-	TC54VN4102ECB	Vdet-IC	4.1V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
P10	-	DDTA143FCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/22k	SOT-23	16ta	-	3d	Di
P10	-	DDTA143FE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/22k	SOT-523	16ta	-	3d	Di
P10	-	DDTA143FKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/22k	SC-59	16ta	-	3d	Di
P10	-	DDTA143FUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/22k	SOT-323	16ta	-	3d	Di
p11	-	PDTA114TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=10k	SOT-23	16ta	-	3a	NxH
p11	-	PDTA115TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=100k	SOT-323	16ta	-	3a	NxH
P11	-	DDTA143ZCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/47k	SOT-23	16ta	-	3d	Di
P11	-	DDTA143ZE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=4k7/47k	SOT-523	16ta	-	3d	Di
P11	-	DDTA143ZKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/47k	SC-59	16ta	-	3d	Di
P11	-	DDTA143ZUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/47k	SOT-323	16ta	-	3d	Di
p12	-	PDTA144VU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	SOT-323	16ta	-	3a	NxH
p12	-	PDTC114TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=10k	SOT-23	16ta	-	3a	NxH
P12	-	DDTA114TCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	SOT-23	16ta	-	3d	Di
P12	-	DDTA114TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=10k	SOT-523	16ta	-	3d	Di
P12	-	DDTA114TKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	SC-59	16ta	-	3d	Di
P12	-	DDTA114TUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	SOT-323	16ta	-	3d	Di
P12	-	SO2906A	Si-pnp	GP, 60V, 600mA, 400mW, >200MHz, B>40	SOT-23	16ta	-	3a	Ste
p13	-	PDTA123YU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	SOT-323	16ta	-	3a	NxH
P13	-	DDTA114ECA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	SOT-23	16ta	-	3d	Di
P13	-	DDTA114EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=10k/10k	SOT-523	16ta	-	3d	Di
P13	-	DDTA114EKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	SC-59	16ta	-	3d	Di
P13	-	DDTA114EUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	SOT-323	16ta	-	3d	Di
P13	-	XC61CN4102M	Vdet-IC	4.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
P13	-	XE61CN4145MR	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
p14	-	PDTA113EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=1k/1k	SOT-323	16ta	-	3a	NxH
P14	-	DDTA114YCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/47k	SOT-23	16ta	-	3d	Di
P14	-	DDTA114YE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=10k/47k	SOT-523	16ta	-	3d	Di
P14	-	DDTA114YKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/47k	SC-59	16ta	-	3d	Di
P14	-	DDTA114YUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/47k	SOT-323	16ta	-	3d	Di
p15	-	PDTA113ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxH
p15	-	PDTC115EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	SOT-323	16ta	-	3a	NxH
P15	-	DDTA114WCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/47k	SOT-23	16ta	-	3d	Di
P15	-	DDTA114WE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=10k/47k	SOT-523	16ta	-	3d	Di
P15	-	DDTA114WKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/47k	SC-59	16ta	-	3d	Di
P15	-	DDTA114WUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/47k	SOT-323	16ta	-	3d	Di
P15	-	LN61FN4112M	Vdet-IC	4.1V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
P15	-	TC51N4102ECB	Vdet-IC	4.1V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
P15	-	XC61FN4112M	Vdet-IC	4.1V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
P15	-	XC61HN4112MR	Vdet-IC	4.1V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
p16	-	PDTA113ZU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=1k/10k	SOT-323	16ta	-	3a	NxH
p16	-	PDTC114ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k	SOT-23	16ta	-	3a	NxH
P16	-	DDTA124TCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=22k	SOT-23	16ta	-	3d	Di
P16	-	DDTA124TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=22k	SOT-523	16ta	-	3d	Di
P16	-	DDTA124TKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=22k	SC-59	16ta	-	3d	Di
P16	-	DDTA124TUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=22k	SOT-323	16ta	-	3d	Di
P16	-	LN61FN4142M	Vdet-IC	4.1V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
P16	-	XC61FN4142M	Vdet-IC	4.1V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
P16	-	XC61HN4142MR	Vdet-IC	4.1V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
p17	-	PDTC115TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=100k	SOT-323	16ta	-	3a	NxH
p17	-	PDTC124ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k	SOT-23	16ta	-	3a	NxH
P17	-	DDTA124ECA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SOT-23	16ta	-	3d	Di
P17	-	DDTA124EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=22k/22k	SOT-523	16ta	-	3d	Di
P17	-	DDTA124EKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SC-59	16ta	-	3d	Di
P17	-	DDTA124EUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SOT-323	16ta	-	3d	Di
P17	-	LN61FN4152M	Vdet-IC	4.1V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
P17	-	XC61FN4152M	Vdet-IC	4.1V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P17	-	XC61HN4152MR	Vdet-IC	4.1V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
p18	-	PDTC143ZT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k	SOT-23	16ta	-	3a	NxH
p18	-	PDTC144VU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	SOT-323	16ta	-	3a	NxH
P18	-	DDTA124XCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	SOT-23	16ta	-	3d	Di
P18	-	DDTA124XE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=22k/47k	SOT-523	16ta	-	3d	Di
P18	-	DDTA124XKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	SC-59	16ta	-	3d	Di
P18	-	DDTA124XUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	SOT-323	16ta	-	3d	Di
p19	-	PDTA143ZT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k	SOT-23	16ta	-	3a	NxH
p19	-	PDTC123YU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	SOT-323	16ta	-	3a	NxH
P19	-	DDTA144TCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=47k	SOT-23	16ta	-	3d	Di
P19	-	DDTA144TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=47k	SOT-523	16ta	-	3d	Di
P19	-	DDTA144TKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=47k	SC-59	16ta	-	3d	Di
P19	-	DDTA144TUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=47k	SOT-323	16ta	-	3d	Di
p1A	-	PMBT3904	Si-npn	Sw, 60V, 100mA, 250mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	PhH
p1A	-	PMMT3904	Si-npn	GP, 60V, 200mA, 350mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	Phi
P1A	-	VP2110K1	p-MOSFET	V-MOS, 100V, 120mA, <12Ω(0.5A)	SOT-23	16fh	-	3a	Stx
p1B	-	PMBT2222	Si-npn	Sw, 60V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	PhM
p1D	-	PMBTA42	Si-npn	Vid, 300/300V, 100mA, 250mW, B>25, >50MHz	SOT-23	16ta	-	3a	PhM
p1E	-	PMBTA43	Si-npn	Vid, 200/200V, 100mA, 250mW, B>25, >50MHz	SOT-23	16ta	-	3a	PhM
p1F	-	PMBT5550	Si-npn	HV, 160V, 300mA, 250mW, B=60..250, 100..300MHz	SOT-23	16ta	-	3a	PhM
p1G	-	PMBTA06	Si-npn	GP, 80V, 500mA, 250mW, B>100, >100MHz	SOT-23	16ta	-	3a	PhM
p1G	-	PMMTA06	Si-npn	GP, 80V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	Phi
p1H	-	PMBTA05	Si-npn	GP, 60V, 500mA, 250mW, B>100, >100MHz	SOT-23	16ta	-	3a	PhM
p1J	-	PMBT2369	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120, >500MHz	SOT-23	16ta	-	3a	PhM
p1K	-	PMBT6428	Si-npn	GP, AF, 60V, 100mA, 250mW, B>250..650, 100..700MHz	SOT-23	16ta	-	3a	PhM
p1L	-	PMBT6429	Si-npn	GP, AF, 55V, 100mA, 250mW, B>500..1250, 100..700MHz	SOT-23	16ta	-	3a	PhM
p1M	-	PMBTA13	Si-npn-Darl	GP, 30V, 500mA, 250mW, B>5000, >125MHz	SOT-23	16ta	-	3a	PhM
p1N	-	PMBTA12	Si-npn-Darl	GP, 30V, 300mA, 250mW, B>10000, >125MHz	SOT-23	16ta	-	3a	Phi
p1N	-	PMBTA14	Si-npn-Darl	GP, 30V, 500mA, 250mW, B>10000, >125MHz	SOT-23	16ta	-	3a	PhM
p1P	-	PMBT2222A	Si-npn	Sw, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	PhM
P1p	-	BFR92	Si-npn	UHF-A-Band, 20V, 25mA, 300mW, B>40, >5GHz	SOT-23	16ta	-	3a	Phi
p1Q	-	PMBT5088	Si-npn	GP, AF, 30V, 200mA, 325mW, B>500, 160MHz	SOT-23	16ta	-	3a	PhM
p1S	-	PDTA123TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=2.2k	SOT-323	16ta	-	3a	NxH
P1s	-	BFR92AW	Si-npn	UHF-A-Band, 20V, 25mA, 300mW, B>40, >5GHz	SOT-323	16ta	-	3c	Inf
P1s	-	BFR92W	Si-npn	UHF-A-Band, 20V, 25mA, 300mW, B>40, >5GHz	SOT-323	16ta	-	3a	Sie
p1T	-	PDTC123TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=2.2k	SOT-323	16ta	-	3a	NxH
p1T	-	PDTD123TT	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1=2.2k	SOT-23	16ta	-	3a	NxH
p1U	-	PDTB123TT	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1=2.2k	SOT-23	16ta	-	3a	NxH
P1Y	-	PMBT3903	Si-npn	GP, 60V, 200mA, 250mW, B=50..150, >300MHz	SOT-23	16ta	-	3a	Phi
P2	-	2SK1577-2	n-FET	VHF/UHF, 35V, 100mA, 150mW, Idss=45..65mA, Up<6V	SOT-23	16fa	-	3a	Soy
P2	-	BFR92AL	Si-npn	VHF.UHF, 20V, 25mA, 273mW, B>40, 4.5GHz	SOT-23	16ta	-	3a	Mot
P2	-	BFR92AT	Si-npn	UHF-A-Band, 20V, 25mA, 300mW, B>40, >5GHz	SOT-416	16ta	-	3a	Phi
P2	-	BZX84C12T	Z-diode	11.4..12.7V, Zzt=25Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
P2	-	CZRH3-55C12	Z-diode	12.0..12.70V, Zzt=25Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
P2	-	ELM7622HCB	Vdet-IC	2.2V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
P2	-	ELM9722CBB	Vdet-IC	2.2V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
P2	-	KRA116S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=1k/10k	SOT-23	16ta	-	3f	Kec
P2	-	KRA316	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=1k/10k	SOT-323	16ta	-	3f	Kec
P2	-	KRA316E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=1k/10k	SOT-490	18ta	-	3f	Kec
P2	-	KRA316V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=1k/10k	VSM	18ta	-	3f	Kec
P2	-	LM4040A25IDC	Vref-IC	µPower, Precision, Shunt, 2.50V±0.1%	SC-70	16dk	RF1	3d	Ti
P2	-	MMBZ5267BW	Z-diode	75V±5%, Izt=1.7mA, Zzt=270Ω, 200mW	SOT-323	16dc	-	3c	Pjt
P2	-	R1100D321C	LVR-IC	µ-low Icc, 3.2V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
P2	-	R3130N26HC3	Vdet-IC	2.6V±1.5%, -Reset ODO, 400ms	SOT-23	16vdc	VD6	3b	Ric
P2	-	RT1P241C	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=22k/22k	SC-59	16ta	-	3a	Mit
P2	-	RT1P241M	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=22k/22k	SOT-323	16ta	-	3a	Mit
P2	-	RT1P241U	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 200MHz, R1/R2=22k/22k	SC-75A	16ta	-	3a	Mit
P2	-	SST202	n-FET	AF, LN, 40V, 350mW, Idss=0.9..4.5mA, Up<4V	SOT-23	16fj	-	3a	Six
P2	-	TC54VN4202ECB	Vdet-IC	4.2V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
p20	-	PDTC144WT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/22k	SOT-23	16ta	-	3a	NxH
p20	-	PDTC144WU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	SOT-323	16ta	-	3a	NxH
P20	-	DDTA124ECA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SOT-23	16ta	-	3a	Di
P20	-	DDTA124EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=22k/22k	SOT-523	16ta	-	3d	Di
P20	-	DDTA124EKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SC-59	16ta	-	3d	Di
P20	-	DDTA124EUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	SOT-323	16ta	-	3d	Di
P20	-	DDTA144ECA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	SOT-23	16ta	-	3d	Di
P20	-	DDTA144EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=47k/47k	SOT-523	16ta	-	3d	Di
P20	-	DDTA144EKA	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=47k/47k	SC-59	16ta	-	3d	Di
P20	-	DDTA144EUA	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=47k/47k	SOT-323	16ta	-	3d	Di
P20	-	SST270	n-FET	AF, LN, 30V, 350mW, Idss=2..15mA, Up<2V	SOT-23	16fj	-	3a	Cal



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
p21	-	PDTA123ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxH
P21	-	DDTA144VCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/10k	SOT-23	16ta	-	3d	Di
P21	-	DDTA144VE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=47k/10k	SOT-523	16ta	-	3d	Di
P21	-	DDTA144VKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/10k	SC-59	16ta	-	3d	Di
P21	-	DDTA144VUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/10k	SOT-323	16ta	-	3d	Di
P22	-	DDTA144WCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/22k	SOT-23	16ta	-	3d	Di
P22	-	DDTA144WE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=47k/22k	SOT-523	16ta	-	3d	Di
P22	-	DDTA144WKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/22k	SC-59	16ta	-	3d	Di
P22	-	DDTA144WUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/22k	SOT-323	16ta	-	3d	Di
p23	-	PDTA114TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=10k	SOT-323	16ta	-	3a	NxH
p23	-	PDTA123JT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k	SOT-23	16ta	-	3a	NxH
P23	-	DDTA115TCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=100k	SOT-23	16ta	-	3a	Di
P23	-	DDTA115TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=100k	SOT-523	16ta	-	3a	Di
P23	-	DDTA115TKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=100k	SC-59	16ta	-	3a	Di
P23	-	DDTA115TUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=100k	SOT-323	16ta	-	3a	Di
P23	-	XC61CN4202M	Vdet-IC	4.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
P23	-	XE61CN4245MR	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
p24	-	PDTC114TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=10k	SOT-323	16ta	-	3a	NxH
P24	-	DDTA115ECA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=100k/100k	SOT-23	16ta	-	3d	Di
P24	-	DDTA115EE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=100k/100k	SOT-523	16ta	-	3d	Di
P24	-	DDTA115EKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=100k/100k	SC-59	16ta	-	3d	Di
P24	-	DDTA115EUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=100k/100k	SOT-323	16ta	-	3d	Di
P25	-	DDTA125TCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=200k	SOT-23	16ta	-	3d	Di
P25	-	DDTA125TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=200k	SOT-523	16ta	-	3d	Di
P25	-	DDTA125TKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=200k	SC-59	16ta	-	3d	Di
P25	-	DDTA125TUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=200k	SOT-323	16ta	-	3d	Di
P25	-	LN61FN4212M	Vdet-IC	4.2V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
P25	-	SO3906	Si-pnp	Sw, AF, 60/40V, 100mA, 200mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Ste
P25	-	TC51N4202ECB	Vdet-IC	4.2V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
P25	-	XC61FN4212M	Vdet-IC	4.2V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
P25	-	XC61HN4212MR	Vdet-IC	4.2V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
p26	-	PDTC123ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxH
p26	-	PDTC123JT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k	SOT-23	16ta	-	3a	NxH
P26	-	DDTA114GCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=10k	SOT-23	16ta	-	3d	Di
P26	-	DDTA114GE	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=10k	SOT-523	16ta	-	3d	Di
P26	-	DDTA114GKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=10k	SC-59	16ta	-	3d	Di
P26	-	DDTA114GUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=10k	SOT-323	16ta	-	3d	Di
P26	-	DDTA114KA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=10k	SC-59	16ta	-	3d	Di
P26	-	LN61FN4242M	Vdet-IC	4.2V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
P26	-	SO3905	Si-pnp	GP, 40V, 200mA, 250mW, B=50..150, >200MHz	SOT-23	16ta	-	3a	Ste
P26	-	XC61FN4242M	Vdet-IC	4.2V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
P26	-	XC61HN4242MR	Vdet-IC	4.2V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
p27	-	PDTC114YT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k	SOT-23	16ta	-	3a	NxH
P27	-	DDTA124GCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=22k	SOT-23	16ta	-	3d	Di
P27	-	DDTA124GE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R2=22k	SOT-523	16ta	-	3d	Di
P27	-	DDTA124GKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=22k	SC-59	16ta	-	3d	Di
P27	-	DDTA124GUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=22k	SOT-323	16ta	-	3d	Di
P27	-	DDTA124KA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=22k	SC-59	16ta	-	3d	Di
P27	-	LN61FN4252M	Vdet-IC	4.2V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
P27	-	XC61FN4252M	Vdet-IC	4.2V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
P27	-	XC61HN4252MR	Vdet-IC	4.2V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
p28	-	PDTA144WU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	SOT-323	16ta	-	3a	NxH
P28	-	DDTA144GCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=47k	SOT-23	16ta	-	3d	Di
P28	-	DDTA144GE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R2=47k	SOT-523	16ta	-	3d	Di
P28	-	DDTA144GKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=47k	SC-59	16ta	-	3d	Di
P28	-	DDTA144GUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=47k	SOT-323	16ta	-	3d	Di
P28	-	DDTA144KA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=47k	SC-59	16ta	-	3d	Di
p29	-	PDTA114YT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k	SOT-23	16ta	-	3a	NxH
P29	-	DDTA115GCA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=100k	SOT-23	16ta	-	3d	Di
P29	-	DDTA115GE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R2=100k	SOT-523	16ta	-	3d	Di
P29	-	DDTA115GKA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=100k	SC-59	16ta	-	3a	Di
P29	-	DDTA115GUA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=100k	SOT-323	16ta	-	3a	Di
P29	-	DDTA115KA	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R2=100k	SC-59	16ta	-	3a	Di
p2A	-	PMBT3906	Si-pnp	Sw, 40V, 100mA, 250mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	PhH
P2A	-	CMPS5061	Thy-rectifier	Vdrm=100V, It=250mA, 350mW, 2.8µs	SOT-23	16at	-	3a	Cen
p2B	-	PMBT2907	Si-pnp	GP, 40V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	PhM
P2B	-	CMPS5062	Thy-rectifier	Vdrm=200V, It=250mA, 350mW, 2.8µs	SOT-23	16at	-	3a	Cen
P2C	-	CMPS5063	Thy-rectifier	Vdrm=300V, It=250mA, 350mW, 2.8µs	SOT-23	16at	-	3a	Cen
p2D	-	PMBTA92	Si-pnp	Vid, 300/300V, 500mA, 250mW, B=25, >50MHz	SOT-23	16ta	-	3a	PhM
P2D	-	CMPS5064	Thy-rectifier	Vdrm=400V, It=250mA, 350mW, 2.8µs	SOT-23	16at	-	3a	Cen

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
p2E	-	PMBTA93	Si-pnp	Vid, 200/200V, 500mA, 250mW, B=25, >50MHz	SOT-23	16ta	-	3a	PhM
p2F	-	PMBT2907A	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	PhM
p2G	-	PMBTA56	Si-pnp	AF-Drv, 80V, 500mA, 250mW, B>100, >50MHz	SOT-23	16ta	-	3a	PhM
p2H	-	PMBTA55	Si-pnp	AF-Drv, 60V, 500mA, 250mW, B>100, >50MHz	SOT-23	16ta	-	3a	PhM
p2L	-	PMBT5401	Si-pnp	HV, 160V, 300mA, 250mW, B=60..240, 100..300MHz	SOT-23	16ta	-	3a	PhM
P2p	-	BFR92A	Si-npn	UHF-A-Band, 20V, 25mA, 300mW, B>40, >5GHz	SOT-23	16ta	-	3a	Phi
P2p	-	BFR92AW	Si-npn	UHF-A-Band, 20V, 25mA, 300mW, B>40, >5GHz	SOT-323	16ta	-	3a	Phi
p2T	-	PMBT4403	Si-pnp	Sw, 40V, 600mA, 250mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	PhH
p2U	-	PMBTA63	Si-pnp-Darl	GP, 30V, 500mA, 250mW, B>5000, >125MHz	SOT-23	16ta	-	3a	PhM
p2V	-	PMBTA64	Si-pnp-Darl	GP, 30V, 500mA, 250mW, B>10000, >125MHz	SOT-23	16te	-	3a	PhM
p2X	-	PMBT4401	Si-npn	Sw, 60V, 600mA, 250mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	PhH
P3	-	2SK1577-3	n-FET	VHF/UHF, 35V, 100mA, 150mW, Idss=60..80mA, Up<6V	SOT-23	16fa	-	3a	Soy
P3	-	BFS44	Si-pnp	AF/HF, 60/30V, 1A, >60MHz	SOT-323	16te	-	3a	Fer
P3	-	BZX84C13T	Z-diode	12.4..14.1V, Zzt=30Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
P3	-	CZRH3-55C13	Z-diode	13.0..14.10V, Zzt=30Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
P3	-	ELM7623HCB	Vdet-IC	2.3V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
P3	-	ELM9723CBB	Vdet-IC	2.3V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
P3	-	HVM132	PIN-diode	HF-Attenuator, 60V, 100mA	SOT-23	16dc	-	3a	Ren
P3	-	LM4040B25IDC	Vref-IC	µPower, Precision, Shunt, 2.50V±0.2%	SC-70	16dk	RF1	3d	Ti
P3	-	R1100D331C	LVR-IC	µ-low Icc, 3.3V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
P3	-	R3130N29HC3	Vdet-IC	2.9V±1.5%, -Reset ODO, 400ms	SOT-23	16vdc	VD6	3b	Ric
P3	-	RT1P441C	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=47k/47k	SC-59	16ta	-	3a	Mit
P3	-	RT1P441M	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=47k/47k	SOT-323	16ta	-	3a	Mit
P3	-	RT1P441U	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 200MHz, R1/R2=47k/47k	SC-75A	16ta	-	3a	Mit
P3	-	TC54VN4302ECB	Vdet-IC	4.3V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
P3	-	TP0202T	p-MOSFET	V-MOS, 20V, 310mA, <1.4Ω(0.2A)	SOT-23	16fh	-	3a	Stx
p30	-	PDTC114YU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	SOT-323	16ta	-	3a	NxH
P30	-	FB1A4A	Si-npn-Digi	Sw, 30V, 700mA, 200mW, R2=10k	SC-59	16ta	-	3a	Nec
p31	-	PDTA143XT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k	SOT-23	16ta	-	3a	NxH
P31	-	FB1L2Q	Si-npn-Digi	Sw, 30V, 700mA, 200mW, R1/R2=0k47/4k7	SC-59	16ta	-	3a	Nec
P31	-	SST271	n-FET	AF, LN, 30V, 350mW, Idss=6..50mA, Up<4.5V	SOT-23	16fj	-	3a	Cal
p32	-	PDTC143XT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k	SOT-23	16ta	-	3a	NxH
P32	-	FB1A3M	Si-npn-Digi	Sw, 30V, 700mA, 200mW, R1/R2=1k/1k	SC-59	16ta	-	3a	Nec
p33	-	PDTC143TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k	SOT-23	16ta	-	3a	NxH
P33	-	FB1F3P	Si-npn-Digi	Sw, 30V, 700mA, 200mW, R1/R2=2k2/10k	SC-59	16ta	-	3a	Nec
P33	-	SO5401	Si-pnp	GP, HV, 160V, 600mA, 200mW, B=50..240, 400MHz	SOT-23	16ta	-	3a	Ste
P33	-	XC61CN4302M	Vdet-IC	4.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
P33	-	XE61CN4345MR	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
P34	-	FB1L3N	Si-npn-Digi	Sw, 30V, 700mA, 200mW, R1/R2=4k7/10k	SC-59	16ta	-	3a	Nec
P35	-	FB1A4M	Si-npn-Digi	Sw, 30V, 700mA, 200mW, R1/R2=10k/10k	SC-59	16ta	-	3a	Nec
P35	-	FB1L3N	Si-npn-Digi	Sw, 30V, 700mA, 200mW, R1/R2=10k/10k	SC-59	16ta	-	3a	Nec
P35	-	LN61FN4312M	Vdet-IC	4.3V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
P35	-	TC51N4302ECB	Vdet-IC	4.3V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
P35	-	XC61FN4312M	Vdet-IC	4.3V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
P35	-	XC61HN4312MR	Vdet-IC	4.3V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
P36	-	FB1J3P	Si-npn-Digi	Sw, 30V, 700mA, 200mW, R1/R2=3k3/10k	SC-59	16ta	-	3a	Nec
P36	-	LN61FN4342M	Vdet-IC	4.3V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
P36	-	XC61FN4342M	Vdet-IC	4.3V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
P36	-	XC61HN4342MR	Vdet-IC	4.3V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
P37	-	LN61FN4352M	Vdet-IC	4.3V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
P37	-	XC61FN4352M	Vdet-IC	4.3V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
P37	-	XC61HN4352MR	Vdet-IC	4.3V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
P38	-	SST4338	n-FET	GP, Low-Noise, 50V, Idss=0.2mA, Up<1V	SOT-23	16fa	-	3a	Lns
P39	-	SO692	Si-pnp	HV, Vld, 300V,100mA, 310mW, B>25, 50MHz	SOT-23	16ta	-	3a	Ste
P39	-	SST4339	n-FET	GP, Low-Noise, 50V, Idss=0.5mA, Up<1.8V	SOT-23	16fa	-	3a	Lns
P4	-	2SD1161-P4	Si-npn	GP, 30V, 0.03A, Emitter-R=130Ω,	SOT-23	16ta	-	3a	San
P4	-	BFR92R	Si-npn	UHF-A-Band, 20V, 25mA, 300mW, B>40, >5GHz	SOT-23	16ta	-	3a	Mot
P4	-	BZX84C15T	Z-diode	13.8..15.6V, Zzt=30Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
P4	-	CZRH3-55C15	Z-diode	15.0..15.60V, Zzt=30Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
P4	-	ELM7624HCB	Vdet-IC	2.4V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
P4	-	ELM9724CBB	Vdet-IC	2.4V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
P4	-	ILC5061IC44X	Vdet-IC	4.4V±2%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
P4	-	ILC5061M44X	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
P4	-	KA4F3M	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=2k2/2k2	SOT-416	16ta	-	3a	Nec
P4	-	KRA117S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=2k2/2k2	SOT-23	16ta	-	3f	Kec
P4	-	KRA317	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/2k2	SOT-323	16ta	-	3f	Kec
P4	-	KRA317E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/2k2	SOT-490	18ta	-	3f	Kec
P4	-	KRA317V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/2k2	VSM	18ta	-	3f	Kec
P4	-	LM4040A41IDC	Vref-IC	µPower, Precision, Shunt, 4.096V±0.1%	SC-70	16dk	RF1	3d	Ti
P4	-	R1100D341C	LVR-IC	µ-low Icc, 3.4V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P4	-	R3130N30HC8	Vdet-IC	3V±1.5%, -Reset ODO, 400ms	SOT-23	16vdc	VD6	3b	Ric
P4	-	SP809EK-2-6	Vdet-IC	2.6V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Sip
P4	-	SST204	n-FET	AF, LN, 25V, 350mW, Idss=0.2..3mA, Up<2V	SOT-23	16fj	-	3a	Six
P4	-	TC54VN4402ECB	Vdet-IC	4.4V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
P40	-	SST4340	n-FET	GP, Low-Noise, 50V, Idss=1.2mA, Up<3V	SOT-23	16fa	-	3a	Lns
p41	-	PDTC144TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=47k	SOT-23	16ta	-	3a	NxH
p41	-	PDTC144TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=47k	SOT-323	16ta	-	3a	NxH
P41	-	SST4341	n-FET	GP, Low-Noise, 50V, Idss=3mA, Up<6V	SOT-23	16fa	-	3a	Lns
p42	-	PDTA123EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	SOT-323	16ta	-	3a	NxH
p42	-	PDTA143TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k	SOT-23	16ta	-	3a	NxH
p43	-	PDTA123JU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	SOT-323	16ta	-	3a	NxH
p43	-	PDTA144WT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/22k	SOT-23	16ta	-	3a	NxH
P43	-	XC61CN4402M	Vdet-IC	4.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
P43	-	XE61CN4445MR	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
p44	-	PDTC115ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k	SOT-23	16ta	-	3a	NxH
p45	-	PDTA143TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=4.7k	SOT-323	16ta	-	3a	NxH
p45	-	PDTC124TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=22k	SOT-23	16ta	-	3a	NxH
P45	-	LN61FN4412M	Vdet-IC	4.4V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
P45	-	TC51N4402ECB	Vdet-IC	4.4V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
P45	-	XC61FN4412M	Vdet-IC	4.4V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
P45	-	XC61HN4412MR	Vdet-IC	4.4V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
p46	-	PDTA143XU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	SOT-323	16ta	-	3a	NxH
p46	-	PDTC124XT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k	SOT-23	16ta	-	3a	NxH
P46	-	LN61FN4442M	Vdet-IC	4.4V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
P46	-	XC61FN4442M	Vdet-IC	4.4V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
P46	-	XC61HN4442MR	Vdet-IC	4.4V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
p47	-	PDTA124XT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k	SOT-23	16ta	-	3a	NxH
p47	-	PDTA143ZU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	SOT-323	16ta	-	3a	NxH
P47	-	LN61FN4452M	Vdet-IC	4.4V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
P47	-	XC61FN4452M	Vdet-IC	4.4V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
P47	-	XC61HN4452MR	Vdet-IC	4.4V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
p48	-	PDTC123EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	SOT-323	16ta	-	3a	NxH
p48	-	PDTC123JU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	SOT-323	16ta	-	3a	NxH
P4A	-	ILC5061AIC44X	Vdet-IC	4.4V±1%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
P4A	-	ILC5061AM44X	Vdet-IC	4.4V±1%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
p4F	-	PMBD353	Si-diode	Dual, Schottky Barrier, 4V, 30mA, Vf<600mV(10mA), <1pF	SOT-23	16ea	-	3a	PhH
P5	-	2SD1161-P5	Si-npn	GP, 30V, 0.03A, Emitter-R=130Ω,	SOT-23	16ta	-	3a	San
P5	-	BFR92AR	Si-npn	UHF-A-Band, 20V, 25mA, 300mW, B>40, >5GHz	SOT-23	16te	-	3a	Phi
P5	-	BZX84C16T	Z-diode	15.3..17.1V, Zzt=40Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
P5	-	CZRH3-55C16	Z-diode	16.0..17.10V, Zzt=40Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
P5	-	ELM7625HCB	Vdet-IC	2.5V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
P5	-	ELM9725CBB	Vdet-IC	2.5V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
P5	-	FMMT2369A	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120	SOT-23	16ta	-	3a	Zx
P5	-	KRA118S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=2k2/10k	SOT-23	16ta	-	3f	Kec
P5	-	KRA318	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/10k	SOT-323	16ta	-	3f	Kec
P5	-	KRA318E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/10k	SOT-490	18ta	-	3f	Kec
P5	-	KRA318V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/10k	VSM	18ta	-	3f	Kec
P5	-	LM4040B41IDC	Vref-IC	µPower, Precision, Shunt, 4.096V±0.2%	SC-70	16dk	RF1	3d	Ti
P5	-	R1100D351C	LVR-IC	µ-low Icc, 3.5V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
P5	-	R3130N46HC5	Vdet-IC	4.6V±1.5%, -Reset ODO, 400ms	SOT-23	16vdc	VD6	3b	Ric
P5	-	RT1P144C	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10/47k	SC-59	16ta	-	3a	Mit
P5	-	RT1P144M	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10/47k	SOT-323	16ta	-	3a	Mit
P5	-	RT1P144U	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 200MHz, R1/R2=10/47k	SC-75A	16ta	-	3a	Mit
P5	-	TC54VN4502ECB	Vdet-IC	4.5V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
p50	-	BZX84-A2V4	Z-diode	2.4V±1%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
p50	-	PDTC124TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=22k	SOT-323	16ta	-	3a	NxH
p51	-	BZX84-A2V7	Z-diode	2.7V±1%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
p51	-	PDTC124XU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	SOT-323	16ta	-	3a	NxH
p52	-	BZX84-A3V0	Z-diode	3.0V±1%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
p52	-	PDTC143TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=4.7k	SOT-323	16ta	-	3a	NxH
p53	-	PDTC143XU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	SOT-323	16ta	-	3a	NxH
P53	-	XC61CN4502M	Vdet-IC	4.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
P53	-	XE61CN4545MR	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
p54	-	PDTC143ZU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	SOT-323	16ta	-	3a	NxH
p55	-	BZX84-A3V9	Z-diode	3.9V±1%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
p55	-	PDTA114YU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	SOT-323	16ta	-	3a	NxH
P55	-	LN61FN4512M	Vdet-IC	4.5V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
P55	-	TC51N4502ECB	Vdet-IC	4.5V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
P55	-	XC61FN4512M	Vdet-IC	4.5V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
P55	-	XC61HN4512MR	Vdet-IC	4.5V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
p56	-	BZX84-A4V3	Z-diode	4.3V±1%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P56	-	LN61FN4542M	Vdet-IC	4.5V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
P56	-	XC61FN4542M	Vdet-IC	4.5V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
P56	-	XC61HN4542MR	Vdet-IC	4.5V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
p57	-	BZX84-A4V7	Z-diode	4.7V±1%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P57	-	LN61FN4552M	Vdet-IC	4.5V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
P57	-	XC61FN4552M	Vdet-IC	4.5V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
P57	-	XC61HN4552MR	Vdet-IC	4.5V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
p58	-	BZX84-A5V1	Z-diode	5.1V±1%, Zzt=60Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
p59	-	BZX84-A5V6	Z-diode	5.6V±1%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
p5A	-	PMBD6050	Si-diode	Sw, Hi-sp, 75V, 215mA, Vf<1.25V(150mA), <4ns	SOT-23	16dc	-	3a	PhH
p5B	-	PMBD6100	Si-diode	Dual, Sw, Hi-sp, 70V, 215mA, Vf<1.1V(100mA), <4ns	SOT-23	16dg	-	3a	PhH
p5C	-	PMBD7000	Si-diode	Dual, Sw, Hi-sp, 100V, 215mA, Vf<1.25V(150mA), <4ns	SOT-23	16dl	-	3a	PhH
p5D	-	PMBD914	Si-diode	Sw, Fast, 70V, 215mA, 250mW, <4ns	SOT-23	16dc	-	3a	PhH
p5G	-	PMBD352	Si-diode	Dual, Sw, Fast, 4V, 30mA, Vf<0.6V(10mA), <1pF	SOT-23	16dl	-	3a	Phi
P6	-	2SD1161-P6	Si-npn	GP, 30V, 0.03A, Emitter-R=130Ω,	SOT-23	16ta	-	3a	San
P6	-	BZX84C18T	Z-diode	16.8..19.1V, Zzt=45Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
P6	-	CZRH3-55C18	Z-diode	18.0..19.10V, Zzt=45Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
P6	-	ELM7626HCB	Vdet-IC	2.6V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
P6	-	ELM9726CBB	Vdet-IC	2.6V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
P6	-	ILC5061IC46X	Vdet-IC	4.6V±2%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
P6	-	ILC5061M46X	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
P6	-	KRA119S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4k7k/10k	SOT-23	16ta	-	3f	Kec
P6	-	KRA319	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7k/10k	SOT-323	16ta	-	3f	Kec
P6	-	KRA319E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7k/10k	SOT-490	18ta	-	3f	Kec
P6	-	KRA319V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7k/10k	VSM	18ta	-	3f	Kec
P6	-	LM4040C41IDC	Vref-IC	µPower, Precision, Shunt, 4.096V±0.5%	SC-70	16dk	RF1	3d	Ti
P6	-	R1100D361C	LVR-IC	µ-low Icc, 3.6V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
P6	-	RT1P430C	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=4k7	SC-59	16ta	-	3a	Mit
P6	-	RT1P430M	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=4k7	SOT-323	16ta	-	3a	Mit
P6	-	RT1P430U	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=4k7	SC-75A	16ta	-	3a	Mit
P6	-	TC54VN4602ECB	Vdet-IC	4.6V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
p60	-	BZX84-A6V2	Z-diode	6.2V±1%, Zzt=10Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P60	-	DDTB113EC	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=1k/1k	SOT-23	16ta	-	3d	Di
P60	-	DDTB113EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=1k/1k	SOT-323	16ta	-	3d	Di
p61	-	BZX84-A6V8	Z-diode	6.8V±1%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P61	-	DDTB123EC	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3d	Di
P61	-	DDTB123EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2.2k/2.2k	SOT-323	16ta	-	3d	Di
p62	-	BZX84-A7V5	Z-diode	7.5V±1%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P62	-	DDTB143EC	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3d	Di
P62	-	DDTB143EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3d	Di
p63	-	BZX84-A8V2	Z-diode	8.2V±1%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P63	-	DDTB114EC	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	SOT-23	16ta	-	3d	Di
P63	-	DDTB114EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/10k	SOT-323	16ta	-	3d	Di
P63	-	XC61CN4602M	Vdet-IC	4.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
P63	-	XE61CN4645MR	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
p64	-	BZX84-A9V1	Z-diode	9.1V±1%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P64	-	DDTB122JC	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=0.22k/4.7k	SOT-23	16ta	-	3d	Di
P64	-	DDTB122JU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=0.22k/4.7k	SOT-323	16ta	-	3d	Di
p65	-	BZX84-A10	Z-diode	10V±1%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P65	-	DDTB113ZC	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=1k/10k	SOT-23	16ta	-	3d	Di
P65	-	DDTB113ZU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=1k/10k	SOT-323	16ta	-	3d	Di
P65	-	LN61FN4612M	Vdet-IC	4.6V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
P65	-	TC51N4602ECB	Vdet-IC	4.6V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
P65	-	XC61FN4612M	Vdet-IC	4.6V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
P65	-	XC61HN4612MR	Vdet-IC	4.6V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
p66	-	BZX84-B10	Z-diode	10V±2.5%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P66	-	DDTB123YC	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2.2k/10k	SOT-23	16ta	-	3d	Di
P66	-	DDTB123YU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2.2k/10k	SOT-323	16ta	-	3d	Di
P66	-	LN61FN4642M	Vdet-IC	4.6V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
P66	-	XC61FN4642M	Vdet-IC	4.6V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
P66	-	XC61HN4642MR	Vdet-IC	4.6V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
p67	-	BZX84-A12	Z-diode	12V±1%, Zzt=25Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P67	-	DDTB133HC	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=3.3k/10k	SOT-23	16ta	-	3d	Di
P67	-	DDTB133HU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=3.3k/10k	SOT-323	16ta	-	3d	Di
P67	-	LN61FN4652M	Vdet-IC	4.6V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
P67	-	XC61FN4652M	Vdet-IC	4.6V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
P67	-	XC61HN4652MR	Vdet-IC	4.6V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
p69	-	BZX84-A15	Z-diode	15V±1%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P69	-	DDTB123TC	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=2.2k	SOT-23	16ta	-	3d	Di

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P69	-	DDTB123TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=2.2k	SOT-323	16ta	-	3d	Di
P6A	-	ILC5061AIC46X	Vdet-IC	4.6V±1%, -Reset ODO	SOT-323	16vdb	VD6	3a	Imp
P6A	-	ILC5061AM46X	Vdet-IC	4.6V±1%, -Reset ODO	SOT-23	16vdb	VD6	3a	Imp
p6D	-	2PD601AQW	Si-npn	GP, Sw, 60V, 100mA, 200mW, B=160..260, >100MHz	SOT-323	16ta	-	3a	PhH
p6E	-	2PD601ARW	Si-npn	GP, Sw, 60V, 100mA, 200mW, B=210..340, >120MHz	SOT-323	16ta	-	3a	PhH
p6F	-	2PD601ASW	Si-npn	GP, Sw, 60V, 100mA, 200mW, B=290..460, >140MHz	SOT-323	16ta	-	3a	PhH
p6G	-	PMBF4393	n-FET	Sw, 30V, 50mA, 225mA, Rds=30Ω (1mA)	SOT-23	16fj	-	3a	Phi
p6J	-	PMBF4391	n-FET	Sw, 30V, 50mA, 225mA, Rds=30Ω (1mA)	SOT-23	16fj	-	3a	Phi
p6K	-	PMBF4392	n-FET	Sw, 30V, 50mA, 225mA, Rds=60Ω (1mA)	SOT-23	16fj	-	3a	Phi
P7	-	BZX84C20T	Z-diode	18.8..21.2V, Zzt=55Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
P7	-	CZRH3-55C20	Z-diode	20.0..21.20V, Zzt=55Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
P7	-	ELM7627HCB	Vdet-IC	2.7V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
P7	-	ELM9727CBB	Vdet-IC	2.7V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
P7	-	KN4F3M	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1/R2=2k2/2k2	SOT-416	16ta	-	3a	Nec
P7	-	KRA120S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/4k7	SOT-23	16ta	-	3f	Kec
P7	-	KRA320	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/4k7	SOT-323	16ta	-	3f	Kec
P7	-	KRA320E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/4k7	SOT-490	18ta	-	3f	Kec
P7	-	KRA320V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/4k7	VSM	18ta	-	3f	Kec
P7	-	LM4040D41IDC	Vref-IC	µPower, Precision, Shunt, 4.096V±1%	SC-70	16dk	RF1	3d	Ti
P7	-	R1100D371C	LVR-IC	µ-low Icc, 3.7V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
P7	-	RT1P140C	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=10k	SC-59	16ta	-	3a	Mit
P7	-	RT1P140M	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=10k	SOT-323	16ta	-	3a	Mit
P7	-	RT1P140T	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 200MHz, R1=10k	T-USM	18ta	-	3a	Mit
P7	-	RT1P140U	Si-pnp-Digi	Sw, 50V, 100mA, 125mW, 200MHz, R1=10k	SC-75A	16ta	-	3a	Mit
P7	-	TC54VN4702ECB	Vdet-IC	4.7V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
p70	-	BZX84-B16	Z-diode	16V±2.5%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P70	-	DDTB143TC	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4.7k	SOT-23	16ta	-	3d	Di
P70	-	DDTB143TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=4.7k	SOT-323	16ta	-	3d	Di
p71	-	BZX84-B18	Z-diode	18V±2.5%, Zzt=45Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P71	-	DDTB114TC	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	SOT-23	16ta	-	3d	Di
P71	-	DDTB114TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	SOT-323	16ta	-	3d	Di
p72	-	BZX84-B20	Z-diode	20V±2.5%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P72	-	DDTB114GC	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=10k	SOT-23	16ta	-	3d	Di
P72	-	DDTB114GU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, B=100..600, 250MHz, R2=10k	SOT-323	16ta	-	3d	Di
p73	-	BZX84-B22	Z-diode	22V±2.5%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P73	-	XC61CN4702M	Vdet-IC	4.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
P73	-	XE61CN4745MR	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
p74	-	BZX84-B24	Z-diode	24V±2.5%, Zzt=70Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
p75	-	BZX84-A27	Z-diode	27V±1%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
P75	-	DDTB122LC	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=0.22k/10k	SOT-23	16ta	-	3d	Di
P75	-	DDTB122LU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=0.22k/10k	SOT-323	16ta	-	3d	Di
P75	-	LN61FN4712M	Vdet-IC	4.7V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
P75	-	TC51N4702ECB	Vdet-IC	4.7V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
P75	-	XC61FN4712M	Vdet-IC	4.7V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
P75	-	XC61HN4712MR	Vdet-IC	4.7V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
P76	-	DDTB142JC	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=0.47k/10k	SOT-23	16ta	-	3d	Di
P76	-	DDTB142JU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=0.47k/10k	SOT-323	16ta	-	3d	Di
P76	-	LN61FN4742M	Vdet-IC	4.7V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
P76	-	XC61FN4742M	Vdet-IC	4.7V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
P76	-	XC61HN4742MR	Vdet-IC	4.7V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
p77	-	PDTA124XU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	SOT-323	16ta	-	3a	NxH
P77	-	DDTB122TC	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=0.22k	SOT-23	16ta	-	3d	Di
P77	-	DDTB122TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=0.22k	SOT-323	16ta	-	3d	Di
P77	-	LN61FN4752M	Vdet-IC	4.7V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
P77	-	XC61FN4752M	Vdet-IC	4.7V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
P77	-	XC61HN4752MR	Vdet-IC	4.7V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
P78	-	DDTB142TC	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=0.47k	SOT-23	16ta	-	3d	Di
P78	-	DDTB142TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=0.47k	SOT-323	16ta	-	3d	Di
p7A	-	PDTA144TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=47k	SOT-323	16ta	-	3a	NxH
p7B	-	PDTA124TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=22k	SOT-323	16ta	-	3a	NxH
p7C	-	PDTA115EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	SOT-323	16ta	-	3a	NxH
p7G	-	PBRN113ET	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxH
p7H	-	PBRP123ET	Si-pnp-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxH
p7J	-	PBRN123ET	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxH
p7K	-	PBRP113ET	Si-pnp-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxH
p7L	-	PBRN113ZT	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxH
p7M	-	PBRP113ZT	Si-pnp-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxH
p7P	-	PBRN123YT	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxH
p7Q	-	PBRP123YT	Si-pnp-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxH
p7R	-	PDTD113ET	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxH





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
p7S	-	PDTB123ET	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxH
p7T	-	PDTD123ET	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxH
p7U	-	PDTB113ET	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxH
p7V	-	PDTD113ZT	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxH
p7W	-	PDTB113ZT	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxH
p7X	-	PDTD123YT	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxH
p7Y	-	PDTB123YT	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxH
P8	-	BZX84C22T	Z-diode	20.8..23.3V, Zzt=55Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
P8	-	BZX84C5V6	Z-diode	5.2..6.0V, Zzt=40Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
P8	-	CZRH3-55C22	Z-diode	22.0..23.30V, Zzt=55Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
P8	-	ELM7628HCB	Vdet-IC	2.8V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
P8	-	ELM9728CBB	Vdet-IC	2.8V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
P8	-	KRA121S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/10k	SOT-23	16ta	-	3f	Kec
P8	-	KRA321	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/10k	SOT-323	16ta	-	3f	Kec
P8	-	KRA321E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/10k	SOT-490	18ta	-	3f	Kec
P8	-	KRA321V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/10k	VSM	18ta	-	3f	Kec
P8	-	R1100D381C	LVR-IC	µ-low Icc, 3.8V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
P8	-	TC54VN4802ECB	Vdet-IC	4.8V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
P81	-	DDTA122LE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=0.22k/100k	SOT-523	16ta	-	3a	Di
P81	-	DDTA122LU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=0.22k/100k	SOT-23	16ta	-	3a	Di
P82	-	DDTA142JE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1/R2=0.47k/10k	SOT-523	16ta	-	3d	Di
P82	-	DDTA142JU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=0.47k/10k	SOT-23	16ta	-	3d	Di
P83	-	DDTA122TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=0.22k	SOT-523	16ta	-	3a	Di
P83	-	DDTA122TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=0.22k	SOT-323	16ta	-	3a	Di
P83	-	XC61CN4802M	Vdet-IC	4.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
P83	-	XE61CN4845MR	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
P84	-	DDTA142TE	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 250MHz, R1=0.47k	SOT-523	16ta	-	3d	Di
P84	-	DDTA142TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1=0.47k	SOT-323	16ta	-	3d	Di
P85	-	LN61FN4812M	Vdet-IC	4.8V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
P85	-	TC51N4802ECB	Vdet-IC	4.8V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
P85	-	XC61FN4812M	Vdet-IC	4.8V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
P85	-	XC61HN4812MR	Vdet-IC	4.8V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
p86	-	BZX84-A75	Z-diode	75V±1%, Zzt=250Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxH
P86	-	LN61FN4842M	Vdet-IC	4.8V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
P86	-	XC61FN4842M	Vdet-IC	4.8V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
P86	-	XC61HN4842MR	Vdet-IC	4.8V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
P87	-	LN61FN4852M	Vdet-IC	4.8V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
P87	-	XC61FN4852M	Vdet-IC	4.8V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
P87	-	XC61HN4852MR	Vdet-IC	4.8V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
p8A	-	PMBZ5226B	Z-diode	3.3V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8B	-	PMBZ5227B	Z-diode	3.6V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8C	-	PMBZ5228B	Z-diode	3.9V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8D	-	PMBZ5229B	Z-diode	4.3V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8E	-	PMBZ5230B	Z-diode	4.7V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8F	-	PMBZ5231B	Z-diode	5.1V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8G	-	PMBZ5232B	Z-diode	5.6V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8H	-	PMBZ5233B	Z-diode	6V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8J	-	PMBZ5234B	Z-diode	6.2V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8K	-	PMBZ5235B	Z-diode	6.8V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8L	-	PMBZ5236B	Z-diode	7.5V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8M	-	PMBZ5237B	Z-diode	8.2V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8N	-	PMBZ5238B	Z-diode	8.7V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8P	-	PMBZ5239B	Z-diode	9.1V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8Q	-	PMBZ5240B	Z-diode	10V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8R	-	PMBZ5241B	Z-diode	11V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8S	-	PMBZ5242B	Z-diode	12V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8T	-	PMBZ5243B	Z-diode	13V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8U	-	PMBZ5244B	Z-diode	14V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
P8U	-	LP0801K1	p-MOSFET	V-MOS, LogL, 16.5V, 0.1A, <12Ω	SOT-23	16fh	-	3a	Stx
p8V	-	PMBZ5245B	Z-diode	15V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8W	-	PMBZ5246B	Z-diode	16V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8X	-	PMBZ5247B	Z-diode	17V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8Y	-	PMBZ5248B	Z-diode	18V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
p8Z	-	PMBZ5249B	Z-diode	19V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhH
P9	-	1SS379	Si-diode	Dual, Schottky, Sw, 15V, 100mA	SOT-23	16ea	-	3a	Tos
P9	-	BCX70KR	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=380..630, >100MHz	SOT-23	16te	-	3a	Phi
P9	-	BCX70RK	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=380..630, >100MHz	SOT-23	16ta	-	3a	Zx
P9	-	BZX84C24T	Z-diode	22.8..25.6V, Zzt=70Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
P9	-	BZX84C27	Z-diode	25.1..28.9V, Zzt=80Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
P9	-	CZRH3-55C24	Z-diode	24.0..25.60V, Zzt=70Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P9	-	DAP222	Si-diode	Dual, Sw, 80V, 100mA, 150mW, <4ns	SOT-416	16df	-	3b	Ons
P9	-	ELM7629HCB	Vdet-IC	2.9V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
P9	-	ELM9729CBB	Vdet-IC	2.9V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
P9	-	KRA122S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=100k/100k	SOT-23	16ta	-	3f	Kec
P9	-	KRA322	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=100k/100k	SOT-323	16ta	-	3f	Kec
P9	-	KRA322E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=100k/100k	SOT-490	18ta	-	3f	Kec
P9	-	KRA322V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=100k/100k	VSM	18ta	-	3f	Kec
P9	-	LM4040A30IDC	Vref-IC	μPower, Precision, Shunt, 3.00V±0.1%	SC-70	16dk	RF1	3d	Ti
P9	-	R1100D391C	LVR-IC	μ-low Icc, 3.9V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
P9	-	TC54VN4902ECB	Vdet-IC	4.9V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
P93	-	XC61CN4902M	Vdet-IC	4.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
P93	-	XE61CN4945MR	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
P95	-	LN61FN4912M	Vdet-IC	4.9V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
P95	-	TC51N4902ECB	Vdet-IC	4.9V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
P95	-	XC61FN4912M	Vdet-IC	4.9V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
P95	-	XC61HN4912MR	Vdet-IC	4.9V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
P96	-	LN61FN4942M	Vdet-IC	4.9V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
P96	-	XC61FN4942M	Vdet-IC	4.9V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
P96	-	XC61HN4942MR	Vdet-IC	4.9V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
P97	-	LN61FN4952M	Vdet-IC	4.9V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
P97	-	XC61FN4952M	Vdet-IC	4.9V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
P97	-	XC61HN4952MR	Vdet-IC	4.9V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
p9A	-	PLVA650A	Z-diode	Avalanshe regulator, 5V, 250mA, 250mW	SOT-23	16dc	-	3a	PhH
p9B	-	PLVA653A	Z-diode	Avalanshe regulator, 5.3V, 250mA, 250mW	SOT-23	16dc	-	3a	PhH
p9C	-	PLVA656A	Z-diode	Avalanshe regulator, 5.6V, 250mA, 250mW	SOT-23	16dc	-	3a	PhH
p9D	-	PLVA659A	Z-diode	Avalanshe regulator, 5.9V, 250mA, 250mW	SOT-23	16dc	-	3a	PhH
p9E	-	PLVA662A	Z-diode	Avalanshe regulator, 6.2V, 250mA, 250mW	SOT-23	16dc	-	3a	PhH
p9F	-	PLVA665A	Z-diode	Avalanshe regulator, 6.5V, 250mA, 250mW	SOT-23	16dc	-	3a	PhH
p9G	-	PLVA668A	Z-diode	Avalanshe regulator, 6.8V, 250mA, 250mW	SOT-23	16dc	-	3a	PhH
p9J	-	PLVA2650A	Z-diode	Dual, Avalanshe regulator, 5V, 250mA, 250mW	SOT-23	16df	-	3a	PhH
p9K	-	PLVA2653A	Z-diode	Dual, Avalanshe regulator, 5.3V, 250mA, 250mW	SOT-23	16df	-	3a	PhH
p9L	-	PLVA2656A	Z-diode	Dual, Avalanshe regulator, 5.6V, 250mA, 250mW	SOT-23	16df	-	3a	PhH
p9M	-	PLVA2659A	Z-diode	Dual, Avalanshe regulator, 5.9V, 250mA, 250mW	SOT-23	16df	-	3a	PhH
p9N	-	PLVA2662A	Z-diode	Dual, Avalanshe regulator, 6.2V, 250mA, 250mW	SOT-23	16df	-	3a	PhM
p9O	-	PLVA2665A	Z-diode	Dual, Avalanshe regulator, 6.5V, 250mA, 250mW	SOT-23	16df	-	3a	PhH
p9P	-	PLVA2668A	Z-diode	Dual, Avalanshe regulator, 6.8V, 250mA, 250mW	SOT-23	16df	-	3a	PhH
pA	-	BU46L394G	Vdet-IC	3.9V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
PA	-	2SC3295-A	Si-npn	AF-Amp, Sw, 50V, 150mA, 150mW, B=600..1800, 250MHz	SC-59	16ta	-	3a	Tos
PA	-	2SC4666A	Si-npn	AF, 50V, 150mA, 100mW, B>600..1800, 250MHz	SOT-323	16ta	-	3a	Tos
PA	-	BA885	PIN-diode	UHF TV-sat, 50V, 50mA, Vf<1.1V(50mA), 0.22pF, <2GHz	SOT-23	16dc	-	3c	Inf
PA	-	BZX84C27T	Z-diode	25.1..28.9V, Zzt=80Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
PA	-	CHTA92LPT	Si-pnp	Vid, Drv, 300V, 500mA, B>25, 50MHz	SOT-23	16ta	-	3a	Chm
PA	-	CZRH3-55C27	Z-diode	27.0..28.90V, Zzt=80Ω, Izt=2mA, 150mW	SOT-523	16dc	-	3a	Cmc
PA	-	KRA101S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4k7/4k7	SOT-23	16ta	-	3f	Kec
PA	-	KRA301	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7/4k7	SOT-323	16ta	-	3f	Kec
PA	-	KRA301E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7/4k7	SOT-490	18ta	-	3f	Kec
PA	-	KRA301V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7/4k7	VSM	18ta	-	3f	Kec
PA	-	LM4040B30IDC	Vref-IC	μPower, Precision, Shunt, 3.00V±0.2%	SC-70	16dk	RF1	3d	Ti
PA	-	TC1278-5ENB	Vdet-IC	4.62V±1%, +Reset PPO	SOT-23	16vdb	VD7	3d	Mcc
pA1	-	BZX84-C75	Z-diode	75V±5%, Zzt=250Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxH
pA2	-	PMBD2836	Si-diode	Dual, Sw, Hi-sp, 75V, 215mA, Vf<1.25V(150mA), <4ns	SOT-23	16df	-	3a	Phi
pA3	-	PMBD2835	Si-diode	Dual, Sw, Hi-sp, 35V, 215mA, Vf<1.25V(150mA), <4ns	SOT-23	16df	-	3a	Phi
pA5	-	PMBD2837	Si-diode	Dual, Sw, Hi-sp, 35V, 215mA, Vf<1.25V(150mA), <4ns	SOT-23	16dg	-	3a	Phi
pA6	-	PMBD2838	Si-diode	Dual, Sw, Hi-sp, 75V, 215mA, Vf<1.25V(150mA), <4ns	SOT-23	16dg	-	3a	Phi
pAA	-	PDTC144VT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/10k	SOT-23	16ta	-	3a	NxH
PAA	-	BC818-16	Si-npn	Sw, 30V, 800mA, 200mW, B=110..250, 100MHz	SOT-23	16ta	-	3a	Auk
PAA	-	BC818F-16	Si-pnp	Sw, 30V, 800mA, 200mW, B=110..250, 100MHz	SOT-23F	18ta	-	3a	Auk
pAB	-	PDTA115ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k	SOT-23	16ta	-	3a	NxH
PAB	-	BC818-25	Si-pnp	Sw, 30V, 800mA, 200mW, B=160..400, 100MHz	SOT-23	16ta	-	3a	Auk
PAB	-	BC818F-25	Si-pnp	Sw, 30V, 800mA, 200mW, B=160..400, 100MHz	SOT-23F	18ta	-	3a	Auk
pAC	-	PDTA115TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=100k	SOT-23	16ta	-	3a	NxH
PAC	-	BC818-40	Si-pnp	Sw, 30V, 800mA, 200mW, B=250..630, 100MHz	SOT-23	16ta	-	3a	Auk
PAC	-	BC818F-40	Si-pnp	Sw, 30V, 800mA, 200mW, B=250..630, 100MHz	SOT-23F	18ta	-	3a	Auk
pAD	-	PDTA123YT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxH
pAE	-	PDTA124TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=22k	SOT-23	16ta	-	3a	NxH
pAF	-	PDTA144TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=47k	SOT-23	16ta	-	3a	NxH
pAG	-	PDTA144VT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/10k	SOT-23	16ta	-	3a	NxH
pAK	-	PDTC115TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=100k	SOT-23	16ta	-	3a	NxH
pAL	-	PDTC123YT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxH
pAM	-	PDTA113ZT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxH

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
pB	-	BU46L404G	Vdet-IC	4.0V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
PB	-	2SAR523EB	Si-pnp	GP, Sw, 50V, 100mA, 150mW, B=120..560, 300MHz	EMT3F	18ta	-	3a	Rhm
PB	-	2SAR523M	Si-pnp	GP, Sw, 50V, 100mA, 150mW, B=120..560, 300MHz	VMT3	18ta	-	3a	Rhm
PB	-	2SAR523UB	Si-pnp	GP, Sw, 50V, 100mA, 200mW, B=120..560, 300MHz	UMT3F	18ta	-	3a	Rhm
PB	-	2SC3295-B	Si-npn	AF-Amp, Sw, 50V, 150mA, 150mW, B=1200..3600, 250MHz	SC-59	16ta	-	3a	Tos
PB	-	2SC4666B	Si-npn	AF, 50V, 150mA, 100mW, B>1200..3600, 250MHz	SOT-323	16ta	-	3a	Tos
PB	-	BZX84C30T	Z-diode	28..32V, Zzt=80Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
PB	-	CZRH3-55C30	Z-diode	30.0..32.0V, Zzt=80Ω, Izt=2mA, 150mW	SOT-523	16dc	-	3a	Cmc
PB	-	KRA102S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-23	16ta	-	3f	Kec
PB	-	KRA302	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/10k	SOT-323	16ta	-	3f	Kec
PB	-	KRA302E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/10k	SOT-490	18ta	-	3f	Kec
PB	-	KRA302V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/10k	VSM	18ta	-	3f	Kec
PB	-	LM4040C30IDC	Vref-IC	µPower, Precision, Shunt, 3.00V±0.5%	SC-70	16dk	RF1	3d	Ti
PB	-	TC1278-10ENB	Vdet-IC	4.37V±1%, +Reset PPO	SOT-23	16vdb	VD7	3d	Mcc
PB-	-	BZB84-C16	Z-diode	Dual, 16V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
pB0	-	BZX84-C68	Z-diode	68V±5%, Zzt=200Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxH
pB1	-	BZX84-C3V3	Z-diode	3.3V±5%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pB2	-	BZX84-C3V6	Z-diode	3.6V±5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pB3	-	BZX84-C3V9	Z-diode	3.9V±5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pB4	-	BZX84-C43	Z-diode	43V±5%, Zzt=150Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pB5	-	BZX84-C47	Z-diode	47V±5%, Zzt=170Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pB6	-	BZX84-C4V3	Z-diode	4.3V±5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pB7	-	BZX84-C51	Z-diode	51V±5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pB8	-	BZX84-C56	Z-diode	56V±5%, Zzt=135Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxH
pB9	-	BZX84-C62	Z-diode	62V±5%, Zzt=150Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxH
PBp	-	BZB84-C16	Z-diode	Dual, 16V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PBt	-	BZB84-C16	Z-diode	Dual, 16V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PBW	-	BZB84-C16	Z-diode	Dual, 16V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
pC	-	BU46L414G	Vdet-IC	4.1V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
PC	-	2SA1577PT-Q	Si-pnp	AF, Sw, 32V, 500mA, B=120..270, 200MHz	SOT-323	16ta	-	3a	Chm
PC	-	2SAR522EB	Si-pnp	GP, Sw, 20V, 200mA, 150mW, B=120..560, 350MHz	EMT3F	18ta	-	3a	Rhm
PC	-	2SAR522M	Si-pnp	GP, Sw, 20V, 200mA, 150mW, B=120..560, 350MHz	VMT3	18ta	-	3a	Rhm
PC	-	2SAR522UB	Si-pnp	GP, Sw, 20V, 200mA, 200mW, B=120..560, 350MHz	UMT3F	18ta	-	3a	Rhm
PC	-	BA886	PIN-diode	RF, 50V, 50mA, Vf(If=10mA)<1.15V, Cd<0.2pF	SOT-23	16dc	-	3a	Sie
PC	-	BZX84C33T	Z-diode	31..35V, Zzt=80Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
PC	-	CZRH3-55C33	Z-diode	33.0..35.0V, Zzt=80Ω, Izt=2mA, 150mW	SOT-523	16dc	-	3a	Cmc
PC	-	KRA103S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/22k	SOT-23	16ta	-	3f	Kec
PC	-	KRA303	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=22k/22k	SOT-323	16ta	-	3f	Kec
PC	-	KRA303E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=22k/22k	SOT-490	18ta	-	3f	Kec
PC	-	KRA303V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=22k/22k	VSM	18ta	-	3f	Kec
PC	-	LM4040D30IDC	Vref-IC	µPower, Precision, Shunt, 3.00V±1%	SC-70	16dk	RF1	3d	Ti
PC	-	TC1278-15ENB	Vdet-IC	4.12V±1%, +Reset PPO	SOT-23	18vdb	VD7	3d	Mcc
PC-	-	BZB84-C18	Z-diode	Dual, 18V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
pC0	-	BZX84-A13	Z-diode	13V±1%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pC1	-	BZX84-A3V6	Z-diode	3.6V±1%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
PC1	-	CMUT4401	Si-npn	GP, 60V, 600mA, 250mW, B=80..100, 300MHz	SOT-523F	18ta	-	3a	Cen
pC2	-	BZX84-A20	Z-diode	20V±1%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
PC2	-	CMUT4403	Si-pnp	GP, 40V, 600mA, 250mW, B=80..100, 300MHz	SOT-523F	18ta	-	3a	Cen
pC3	-	BZX84-A36	Z-diode	36V±1%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pC4	-	BZX84-A39	Z-diode	39V±1%, Zzt=130Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pC5	-	BZX84-A43	Z-diode	43V±1%, Zzt=150Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pC6	-	BZX84-A51	Z-diode	51V±1%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
PCp	-	BZB84-C18	Z-diode	Dual, 18V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PCt	-	BZB84-C18	Z-diode	Dual, 18V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PCW	-	BZB84-C18	Z-diode	Dual, 18V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
pD	-	BU46L424G	Vdet-IC	4.2V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
PD	-	2SA1171-D	Si-pnp	AF, 90V, 50mA, 150mW, B=250..500, 200MHz	SOT-23	16ta	-	3a	Ren
PD	-	BSS84	p-MOSFET	V-MOS, LogL, 50V, 130mA, 200mW, <10Ω(130mA), 3/7ns	SOT-23	16fh	-	3b	Ons
PD	-	BZX84C36T	Z-diode	34..38V, Zzt=90Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
PD	-	CZRH3-55C36	Z-diode	36.0..38.0V, Zzt=90Ω, Izt=2mA, 150mW	SOT-523	16dc	-	3a	Cmc
PD	-	KRA104S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/47k	SOT-23	16ta	-	3f	Kec
PD	-	KRA304	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/47k	SOT-323	16ta	-	3f	Kec
PD	-	KRA304E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/47k	SOT-490	18ta	-	3f	Kec
PD	-	KRA304V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/47k	VSM	18ta	-	3f	Kec
PD	-	LM4040A82IDC	Vref-IC	µPower, Precision, Shunt, 8.192V±0.1%	SC-70	16dk	RF1	3d	Ti
PD-	-	BZB84-C22	Z-diode	Dual, 22V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PDp	-	BZB84-C22	Z-diode	Dual, 22V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PDs	-	BA887	PIN-diode	RF, 50V, 100mA, Ir<0.02µA, Cd<0.27pF	SOT-23	16dc	-	3a	Sie
PDt	-	BZB84-C22	Z-diode	Dual, 22V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PDW	-	BZB84-C22	Z-diode	Dual, 22V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
pE	-	BU46L434G	Vdet-IC	4.3V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
PE	-	2SA1171-E	Si-pnp	AF, 90V, 50mA, 150mW, B=400..800, 200MHz	SOT-23	16ta	-	3a	Ren
PE	-	BZX84C39T	Z-diode	37..41V, Zzt=130Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
PE	-	CZRH3-55C39	Z-diode	39.0..41.0V, Zzt=130Ω, Izt=2mA, 150mW	SOT-523	16dc	-	3a	Cmc
PE	-	KRA105S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=2k2/47k	SOT-23	16ta	-	3f	Kec
PE	-	KRA305	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/47k	SOT-323	16ta	-	3f	Kec
PE	-	KRA305E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/47k	SOT-490	18ta	-	3f	Kec
PE	-	KRA305V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=2k2/47k	VSM	18ta	-	3f	Kec
PE	-	LM4040B82IDC	Vref-IC	µPower, Precision, Shunt, 8.192V±0.2%	SC-70	16dk	RF1	3d	Ti
PE-	-	BZB84-C24	Z-diode	Dual, 24V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PEp	-	BZB84-C24	Z-diode	Dual, 24V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PEt	-	BZB84-C24	Z-diode	Dual, 24V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PEW	-	BZB84-C24	Z-diode	Dual, 24V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
pF	-	BU46L444G	Vdet-IC	4.4V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
PF	-	KRA106S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4k7/47k	SOT-23	16ta	-	3f	Kec
PF	-	KRA306	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7/47k	SOT-323	16ta	-	3f	Kec
PF	-	KRA306E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7/47k	SOT-490	18ta	-	3f	Kec
PF	-	KRA306V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=4k7/47k	VSM	18ta	-	3f	Kec
PF	-	LM4040C82IDC	Vref-IC	µPower, Precision, Shunt, 8.192V±0.5%	SC-70	16dk	RF1	3d	Ti
PF-	-	BZB84-C27	Z-diode	Dual, 27V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PFp	-	BZB84-C27	Z-diode	Dual, 27V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PFt	-	BZB84-C27	Z-diode	Dual, 27V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PFW	-	BZB84-C27	Z-diode	Dual, 27V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
pG	-	BU46L454G	Vdet-IC	4.5V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
PG	-	2SA2154MFV-GR	Si-pnp	GP, Amp, 50V, 150mA, 150mW, B=200..400, >80MHz	SOT-723	18ta	-	3a	Tos
PG	-	LM4040D82IDC	Vref-IC	µPower, Precision, Shunt, 8.192V±1%	SC-70	16dk	RF1	3d	Ti
PG-	-	BZB84-C30	Z-diode	Dual, 30V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
pG1	-	PMBT5551	Si-npn	GP, 180V, 300mA, 250mW, B=80..250, 100..300MHz	SOT-23	16ta	-	3a	PhM
PGp	-	BZB84-C30	Z-diode	Dual, 30V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PGt	-	BZB84-C30	Z-diode	Dual, 30V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PGW	-	BZB84-C30	Z-diode	Dual, 30V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
pH	-	BU46L464G	Vdet-IC	4.6V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
PH	-	KRA107S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/47k	SOT-23	16ta	-	3f	Kec
PH	-	KRA307	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/47k	SOT-323	16ta	-	3f	Kec
PH	-	KRA307E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/47k	SOT-490	18ta	-	3f	Kec
PH	-	KRA307V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=10k/47k	VSM	18ta	-	3f	Kec
PH	-	LM4040A10IDC	Vref-IC	µPower, Precision, Shunt, 10.0V±0.1%	SC-70	16dk	RF1	3d	Ti
PH-	-	BZB84-C33	Z-diode	Dual, 33V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PH2	-	SST4302	n-FET	GP, Low-Noise, 30V, Idss=0.5mA, Up<5V	SOT-23	16fa	-	3a	Lns
PH3	-	SST4303	n-FET	GP, Low-Noise, 30V, Idss=4mA, Up<6V	SOT-23	16fa	-	3a	Lns
PH4	-	SST4304	n-FET	GP, Low-Noise, 30V, Idss=0.5mA, Up<10V	SOT-23	16fa	-	3a	Lns
PHp	-	BZB84-C33	Z-diode	Dual, 33V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PHt	-	BZB84-C33	Z-diode	Dual, 33V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PHW	-	BZB84-C33	Z-diode	Dual, 33V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
PI	-	KRA108S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/47k	SOT-23	16ta	-	3f	Kec
PI	-	KRA308	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=22k/47k	SOT-323	16ta	-	3f	Kec
PI	-	KRA308E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=22k/47k	SOT-490	18ta	-	3f	Kec
PI	-	KRA308V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=22k/47k	VSM	18ta	-	3f	Kec
PIB	-	2SK1070-B	n-FET	AF/HF, 22V, 50mA, 150mW, Idss=6..14mA, Up<2.5V	SC-59A	16fa	-	3a	Ren
PIC	-	2SK1070-C	n-FET	AF/HF, 22V, 50mA, 150mW, Idss=12..22mA, Up<2.5V	SC-59A	16fa	-	3a	Ren
PID	-	2SK1070-D	n-FET	AF/HF, 22V, 50mA, 150mW, Idss=18..30mA, Up<2.5V	SC-59A	16fa	-	3a	Ren
PIE	-	2SK1070-E	n-FET	AF/HF, 22V, 50mA, 150mW, Idss=27..40mA, Up<2.5V	SC-59A	16fa	-	3a	Ren
PJ	-	CHDTA114YKPT	Si-pnp-Digi	Sw, 50V, 70mA, 250MHz, R1/R2=10/47k	SOT-23	16ta	-	3a	Chm
PJ	-	DDZX20C	Z-diode	20V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
PJ	-	KRA109S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/22k	SOT-23	16ta	-	3f	Kec
PJ	-	KRA309	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/22k	SOT-323	16ta	-	3f	Kec
PJ	-	KRA309E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/22k	SOT-490	18ta	-	3f	Kec
PJ	-	KRA309V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1/R2=47k/22k	VSM	18ta	-	3f	Kec
PJ	-	LM4040B10IDC	Vref-IC	µPower, Precision, Shunt, 10.0V±0.2%	SC-70	16dk	RF1	3d	Ti
PJ	-	MCP130-270I	Vdet-IC	2.62V, -Reset ODO, PUR	SOT-23	16vdb	VD7	3d	Mcc
PJ-	-	BZB84-C36	Z-diode	Dual, 36V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
pJ1	-	BSH101	n-MOSFET	V-MOS, LogL, 60V, 0.7A, <0.9Ω	SOT-23	16fh	-	3a	Phi
pJ2	-	BSH102	n-MOSFET	V-MOS, LogL, 30V, 0.85A, <0.6Ω	SOT-23	16fh	-	3a	Phi
pJ3	-	BSH103	n-MOSFET	V-MOS, LogL, 30V, 0.85A, <0.5Ω	SOT-23	16fh	-	3a	Phi
PJp	-	BZB84-C36	Z-diode	Dual, 36V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PJt	-	BZB84-C36	Z-diode	Dual, 36V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PJW	-	BZB84-C36	Z-diode	Dual, 36V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
pK	-	BU46L474G	Vdet-IC	4.7V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
PK	-	BAT400D	Si-diode	SBR, 40V, 500mA, Vf<0.55V(500mA)	SOT-23	16dc	-	3c	Sme
PK	-	KRA110S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=4k7	SOT-23	16ta	-	3f	Kec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PK	-	KRA310	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=4k7	SOT-323	16ta	-	3f	Kec
PK	-	KRA310E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=4k7	SOT-490	18ta	-	3f	Kec
PK	-	KRA310V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=4k7	VSM	18ta	-	3f	Kec
PK	-	LM4040C10IDC	Vref-IC	μPower, Precision, Shunt, 10.0V±0.5%	SC-70	16dk	RF1	3d	Ti
PK	-	MCP130-300I	Vdet-IC	2.92V, -Reset ODO, PUR	SOT-23	16vdb	VD7	3d	Mcc
PK-	-	BZB84-C39	Z-diode	Dual, 39V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PKp	-	BZB84-C39	Z-diode	Dual, 39V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PKt	-	BZB84-C39	Z-diode	Dual, 39V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PKW	-	BZB84-C39	Z-diode	Dual, 39V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
pKX	-	PMBF170	n-MOSFET	TMOS, LogL, 60V, 300mA, 830mW, <25Ω(500mA)	SOT-23	16fh	-	3a	Phi
pKZ	-	PMBF107	n-MOSFET	V-MOS, LogL, 200V, 100mA, 250mW, <28Ω(20mA)	SOT-23	16fh	-	3a	Phi
PL	-	2SB1234	Si-pnp-Darl	AF-Drv, 80V, 200mA, 200mW, B>5000	SOT-23	16ta	-	3a	San
PL	-	DDZX24C	Z-diode	24V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
PL	-	LM4040D10IDC	Vref-IC	μPower, Precision, Shunt, 10.0V±1%	SC-70	16dk	RF1	3d	Ti
PL	-	MCP130-315I	Vdet-IC	3.07V, -Reset ODO, PUR	SOT-23	16vdb	VD7	3d	Mcc
PL-	-	BZB84-C43	Z-diode	Dual, 43V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PLp	-	BZB84-C43	Z-diode	Dual, 43V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PLt	-	BZB84-C43	Z-diode	Dual, 43V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PLW	-	BZB84-C43	Z-diode	Dual, 43V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
pM	-	BU46L484G	Vdet-IC	4.8V±1%, -Reset PPO, Td=400ms	SSOP-3	16vda	VD7	3q	Rhm
PM	-	KRA111S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	SOT-23	16ta	-	3f	Kec
PM	-	KRA311	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=10k	SOT-323	16ta	-	3f	Kec
PM	-	KRA311E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=10k	SOT-490	18ta	-	3f	Kec
PM	-	KRA311V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=10k	VSM	18ta	-	3f	Kec
PM	-	MCP130-450I	Vdet-IC	4.37V, -Reset ODO, PUR	SOT-23	16vdb	VD7	3d	Mcc
PM-	-	BZB84-C47	Z-diode	Dual, 47V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PMp	-	BZB84-C47	Z-diode	Dual, 47V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PMs	-	BAR66	PIN-diode	Dual, 150V, 200mA, 250mW, Vf<1.2V(50mA), <0.9pF	SOT-23	16dl	-	3c	Inf
PMt	-	BZB84-C47	Z-diode	Dual, 47V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PMW	-	BZB84-C47	Z-diode	Dual, 47V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
PN	-	2SB1197KPT-Q	Si-pnp	AF, Sw, 32V, 800mA, B=120..270, 200MHz	SOT-23	16ta	-	3a	Chm
PN	-	BA779	PIN-diode	HF-Att, 30V, 50mA, 0.5pF, Rf<50Ω, 1GHz	SOT-23	16dc	-	3a	Sil
PN	-	KRA112S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=100k	SOT-23	16ta	-	3f	Kec
PN	-	KRA312	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=100k	SOT-323	16ta	-	3f	Kec
PN	-	KRA312E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=100k	SOT-490	18ta	-	3f	Kec
PN	-	KRA312V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=100k	VSM	18ta	-	3f	Kec
PN	-	MCP130-460I	Vdet-IC	4.47V, -Reset ODO, PUR	SOT-23	16vdb	VD7	3d	Mcc
PN-	-	BZB84-C51	Z-diode	Dual, 51V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PNp	-	BZB84-C51	Z-diode	Dual, 51V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PNt	-	BZB84-C51	Z-diode	Dual, 51V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PNW	-	BZB84-C51	Z-diode	Dual, 51V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
PO	-	2SA1712-O	Si-pnp	Sw, 29V, 30mA, 200mW, B=70..140, 15/110ns	SOT-23	16ta	-	3a	Tos
PO	-	KRA113S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=22k	SOT-23	16ta	-	3f	Kec
PO	-	KRA313	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=22k	SOT-323	16ta	-	3f	Kec
PO	-	KRA313E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=22k	SOT-490	18ta	-	3f	Kec
PO	-	KRA313V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=22k	VSM	18ta	-	3f	Kec
PO	-	MCP130-475I	Vdet-IC	4.62V, -Reset ODO, PUR	SOT-23	16vdb	VD7	3d	Mcc
pO4	-	PMBS3904	Si-npn	Sw, 40V, 100mA, 250mW, B=100..300, >180MHz	SOT-23	16ta	-	3a	PhH
pO6	-	PMBS3906	Si-pnp	Sw, 40V, 100mA, 250mW, B=100..300, >150MHz	SOT-23	16ta	-	3a	PhH
POs	-	BAR64	PIN-diode	GP, Sw, 200V, 100mA, Vf<1.1V(50mA, 0.35pF, ..3GHz	SOT-23	16dc	-	3c	Inf
PP	-	KRA114S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=47k	SOT-23	16ta	-	3f	Kec
PP	-	KRA314	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=47k	SOT-323	16ta	-	3f	Kec
PP	-	KRA314E	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=47k	SOT-490	18ta	-	3f	Kec
PP	-	KRA314V	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, 200MHz, R1=47k	VSM	18ta	-	3f	Kec
PP	-	MCP130-485I	Vdet-IC	4.72V, -Reset ODO, PUR	SOT-23	16vdb	VD7	3d	Mcc
PP-	-	BZB84-C56	Z-diode	Dual, 56V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PPp	-	BZB84-C56	Z-diode	Dual, 56V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PPs	-	BAR64-04	PIN-diode	Dual, Sw, RF-Att, 150V, 100mA, Vf<1.1V(50mA), < 0.35pF	SOT-23	16dl	-	3c	Inf
PPs	-	BAR64-04T	PIN-diode	Dual, Sw, RF-Att, 150V, 100mA, Vf<1.1V(50mA), < 0.35pF	SOT-416	16dl	-	3a	Inf
PPs	-	BAR64-04W	PIN-diode	Dual, Sw, RF-Att, 150V, 100mA, Vf<1.1V(50mA), < 0.35pF	SOT-323	16dl	-	3c	Inf
PPt	-	BZB84-C56	Z-diode	Dual, 56V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PPW	-	BZB84-C56	Z-diode	Dual, 56V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
PQ	-	2SA2199-Q	Si-pnp	AF, 50V, 100mA, 150mW, B=120..270, 110MHz	VMN3	19ta	-	3k	Rhm
PQ	-	2SD1821-Q	Si-npn	AF, LN, 150V, 100mA, 150mW, B=85..170, 150MHz	SOT-323	16ta	-	3a	Pan
PQ	-	2SD814-Q	Si-npn	AF, LN, 150V, 50mA, 200mW, B=90..155, 150MHz	SC-59	16ta	-	3a	Pan
PQ	-	KRA221S	Si-pnp-Digi	Sw, 50V, 800mA, 200mW, 200MHz, R1/R2=1k/1k	SOT-23	16ta	-	3f	Kec
PQ-	-	BZB84-C62	Z-diode	Dual, 62V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PQp	-	BZB84-C62	Z-diode	Dual, 62V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PQt	-	BZB84-C62	Z-diode	Dual, 62V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PQW	-	BZB84-C62	Z-diode	Dual, 62V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PR	-	2SA1712-R	Si-pnp	Sw, 29V, 30mA, 200mW, B=100..200, 15/110ns	SOT-23	16ta	-	3a	Tos
PR	-	2SA2199-R	Si-pnp	AF, 50V, 100mA, 150mW, B=180..390, 110MHz	VMN3	19ta	-	3k	Rhm
PR	-	2SD1821-R	Si-npn	AF, LN, 150V, 100mA, 150mW, B=130..220, 150MHz	SOT-323	16ta	-	3a	Pan
PR	-	2SD2240-R	Si-npn	AF, LN, 150V, 100mA, 125mW, B=130..200, 150MHz	SOT-416	16ta	-	3a	Pan
PR	-	2SD814-R	Si-npn	AF, LN, 150V, 50mA, 200mW, B=130..220, 150MHz	SC-59	16ta	-	3a	Pan
PR	-	KRA222S	Si-pnp-Digi	Sw, 50V, 800mA, 200mW, 200MHz, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3f	Kec
PR-	-	BZB84-C68	Z-diode	Dual, 68V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
pR0	-	BZX84-B56	Z-diode	56V±2.5%, Zzt=135Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxH
pR1	-	BZX84-B5V1	Z-diode	5.1V±2.5%, Zzt=60Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pR2	-	BZX84-B5V6	Z-diode	5.6V±2.5%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pR3	-	BZX84-B62	Z-diode	62V±2.5%, Zzt=150Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxH
pR4	-	BZX84-B68	Z-diode	68V±2.5%, Zzt=200Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxH
pR5	-	BZX84-B6V2	Z-diode	6.2V±2.5%, Zzt=10Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pR6	-	BZX84-B6V8	Z-diode	6.8V±2.5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pR7	-	BZX84-B75	Z-diode	75V±2.5%, Zzt=250Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxH
pR8	-	BZX84-B7V5	Z-diode	7.5V±2.5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pR9	-	BZX84-B8V2	Z-diode	8.2V±2.5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
PRp	-	BZB84-C68	Z-diode	Dual, 68V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PRs	-	BAR64-05	PIN-diode	Dual, Sw, RF-Att, 150V, 100mA, Vf<1.1V(50mA), < 0.35pF	SOT-23	16dg	-	3c	Inf
PRs	-	BAR64-05W	PIN-diode	Dual, Sw, RF-Att, 150V, 100mA, Vf<1.1V(50mA), < 0.35pF	SOT-323	16dg	-	3c	Inf
PRt	-	BZB84-C68	Z-diode	Dual, 68V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PRW	-	BZB84-C68	Z-diode	Dual, 68V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
PS	-	2SD1821-S	Si-npn	AF, LN, 150V, 100mA, 150mW, B=185..330, 150MHz	SOT-323	16ta	-	3a	Pan
PS	-	2SD2240-S	Si-npn	AF, LN, 150V, 100mA, 125mW, B=185..330, 150MHz	SOT-416	16ta	-	3a	Pan
PS	-	2SD814-S	Si-npn	AF, LN, 150V, 50mA, 200mW, B=185..330, 150MHz	SC-59	16ta	-	3a	Pan
PS	-	KRA223S	Si-pnp-Digi	Sw, 50V, 800mA, 200mW, 200MHz, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3f	Kec
PS	-	TP0101TS	p-MOSFET	V-MOS, LogL, 20V, 1A, 1W, <0.65Ω	SOT-23	16fh	-	3a	Six
PS-	-	BZB84-C75	Z-diode	Dual, 75V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
pS0	-	BZX84-B39	Z-diode	39V±2.5%, Zzt=130Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pS1	-	BZX84-B3V0	Z-diode	3.0V±2.5%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pS2	-	BZX84-B3V3	Z-diode	3.3V±2.5%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pS3	-	BZX84-B3V6	Z-diode	3.6V±2.5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pS4	-	BZX84-B3V9	Z-diode	3.9V±2.5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pS5	-	BZX84-B43	Z-diode	43V±2.5%, Zzt=150Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pS6	-	BZX84-B47	Z-diode	47V±2.5%, Zzt=170Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pS7	-	BZX84-B4V3	Z-diode	4.3V±2.5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pS8	-	BZX84-B4V7	Z-diode	4.7V±2.5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pS9	-	BZX84-B51	Z-diode	51V±2.5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
PSp	-	BZB84-C75	Z-diode	Dual, 75V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PSs	-	BAR64-06	PIN-diode	Dual, Sw, RF-Att, 150V, 100mA, Vf<1.1V(50mA), < 0.35pF	SOT-23	16df	-	3c	Inf
PSs	-	BAR64-06W	PIN-diode	Dual, Sw, RF-Att, 150V, 100mA, Vf<1.1V(50mA), < 0.35pF	SOT-323	16df	-	3c	Inf
PSt	-	BZB84-C75	Z-diode	Dual, 75V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PSW	-	BZB84-C75	Z-diode	Dual, 75V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
PT	-	2SC2411KPT-P	Si-npn	Sw, 40V, 500mA, 225mW, B=82..180, 250MHz	SOT-23	16ta	-	3a	Chm
PT	-	2SD1821-T	Si-npn	AF, LN, 150V, 100mA, 150mW, B=220..400, 150MHz	SOT-323	16ta	-	3a	Pan
PT	-	2SD814-T	Si-npn	AF, LN, 150V, 50mA, 200mW, B=220..400, 150MHz	SC-59	16ta	-	3a	Pan
PT	-	CHT2907TPT	Si-pnp	AF, Sw, 60V, 600mA, B=100..300, 200MHz	SOT-416	16ta	-	3a	Chm
PT	-	CHT4403TPT	Si-pnp	AF, Sw, 40V, 600mA, B=100..300, 200MHz	SOT-416	16ta	-	3a	Chm
PT	-	KRA224S	Si-pnp-Digi	Sw, 50V, 800mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-23	16ta	-	3f	Kec
PT-	-	BZB84-B16	Z-diode	Dual, 16V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
pT1	-	BZX84-B9V1	Z-diode	9.1V±2.5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pT2	-	BZX84-C27	Z-diode	27V±5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
PT2	-	2SC4365-2	Si-npn	UHF, Mix/Osc, 25V, 50mA, 250mW, B=40..80, 3GHz	CP	16ta	-	3a	San
PT2	-	2SC4402-2	Si-npn	UHF, Mix/Osc, 25V, 50mA, 150mW, B=40..80, 3GHz	MCP	16ta	-	3a	San
pT3	-	BZX84-C2V4	Z-diode	2.4V±5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
PT3	-	2SC4365-3	Si-npn	UHF, Mix/Osc, 25V, 50mA, 250mW, B=60..120, 3GHz	CP	16ta	-	3a	San
PT3	-	2SC4402-3	Si-npn	UHF, Mix/Osc, 25V, 50mA, 150mW, B=60..120, 3GHz	MCP	16ta	-	3a	San
pT4	-	BZX84-C2V7	Z-diode	2.7V±5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
PT4	-	2SC4365-4	Si-npn	UHF, Mix/Osc, 25V, 50mA, 250mW, B=100..200, 3GHz	CP	16ta	-	3a	San
PT4	-	2SC4402-4	Si-npn	UHF, Mix/Osc, 25V, 50mA, 150mW, B=100..200, 3GHz	MCP	16ta	-	3a	San
pT5	-	BZX84-C30	Z-diode	30V±5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pT6	-	BZX84-C33	Z-diode	33V±5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pT7	-	BZX84-C36	Z-diode	36V±5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pT8	-	BZX84-C39	Z-diode	39V±5%, Zzt=130Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pT9	-	BZX84-C3V0	Z-diode	3.0V±5%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
PTp	-	BZB84-B16	Z-diode	Dual, 16V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PTt	-	BZB84-B16	Z-diode	Dual, 16V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PTW	-	BZB84-B16	Z-diode	Dual, 16V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
PU	-	2SA2119TPT	Si-pnp	AF, Sw, 12V, 500mA, B=270..680, 260MHz	SOT-416	16ta	-	3a	Chm
PU	-	KRA225S	Si-pnp-Digi	Sw, 50V, 800mA, 200mW, 200MHz, R1/R2=1k/10k	SOT-23	16ta	-	3f	Kec

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PU-	-	BZB84-B18	Z-diode	Dual, 18V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PUp	-	BZB84-B18	Z-diode	Dual, 18V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PUt	-	BZB84-B18	Z-diode	Dual, 18V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PUW	-	BZB84-B18	Z-diode	Dual, 18V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
PV	-	1SV294	PIN-diode	VHF/UHF Var, Res, Att, 50V, 0.05A, 0.23pF, 7Ω(100MHz)	SOT-23	16dc	-	3a	San
PV	-	KRA226S	Si-pnp-Digi	Sw, 50V, 800mA, 200mW, 200MHz, R1/R2=2.2k/10k	SOT-23	16ta	-	3f	Kec
PV-	-	BZB84-B22	Z-diode	Dual, 22V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
pV1	-	BAS31	Si-diode	Dual, GP, Contr, Aval., 90V, 250mA, 250mW, 35pF, <50ns	SOT-23	16dl	-	3a	PhH
pV2	-	BAS35	Si-diode	Dual, GP, Contr, Aval., 90V, 250mA, 250mW, 35pF, <50ns	SOT-23	16df	-	3a	PhH
pV3	-	BAT54A	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16df	-	3a	PhH
pV4	-	BAT54S	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dl	-	3a	PhH
pV5	-	BAV23S	Si-diode	Dual, GP, 200V, 225mA, Vs<1.25V(200mA), <50ns	SOT-23	16dl	-	3a	PhH
PVp	-	BZB84-B22	Z-diode	Dual, 22V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PVt	-	BZB84-B22	Z-diode	Dual, 22V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PVW	-	BZB84-B22	Z-diode	Dual, 22V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
PW	-	CHDTA115EUPT	Si-pnp-Digi	Sw, 50V, 20mA, 250MHz, R1/R2=100k/100k	SOT-323	16ta	-	3a	Chm
PW-	-	BZB84-B24	Z-diode	Dual, 24V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PWp	-	BZB84-B24	Z-diode	Dual, 24V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PWt	-	BZB84-B24	Z-diode	Dual, 24V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PWW	-	BZB84-B24	Z-diode	Dual, 24V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
PX-	-	BZB84-B27	Z-diode	Dual, 27V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PXp	-	BZB84-B27	Z-diode	Dual, 27V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PXt	-	BZB84-B27	Z-diode	Dual, 27V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PXW	-	BZB84-B27	Z-diode	Dual, 27V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
PY	-	2SA2154MFV-Y	Si-pnp	GP, Amp, 50V, 150mA, 150mW, B=120..240, >80MHz	SOT-723	18ta	-	3a	Tos
PY	-	2SC3859	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, B>100, R1=10k	CP	16ta	-	3a	San
PY-	-	BZB84-B30	Z-diode	Dual, 30V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
pY1	-	BZX84-B33	Z-diode	33V±2.5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pY2	-	BZX84-B36	Z-diode	36V±2.5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
PYp	-	BZB84-B30	Z-diode	Dual, 30V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PYt	-	BZB84-B30	Z-diode	Dual, 30V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PYW	-	BZB84-B30	Z-diode	Dual, 30V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
PZ-	-	BZB84-B33	Z-diode	Dual, 33V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
pZ0	-	BZX84-B2V4	Z-diode	2.4V±2.5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pZ1	-	BZX84-B2V7	Z-diode	2.7V±2.5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pZ4	-	BZX84-B30	Z-diode	30V±2.5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pZ5	-	BZX84-B27	Z-diode	27V±2.5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pZ6	-	BZX84-B11	Z-diode	11V±2.5%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pZ7	-	BZX84-B12	Z-diode	12V±2.5%, Zzt=25Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pZ8	-	BZX84-B13	Z-diode	13V±2.5%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pZ9	-	BZX84-B15	Z-diode	15V±2.5%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
pZL	-	PDTA123TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=2.2k	SOT-23	16ta	-	3a	NxH
pZM	-	PDTC123TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=2.2k	SOT-23	16ta	-	3a	NxH
PZp	-	BZB84-B33	Z-diode	Dual, 33V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
PZt	-	BZB84-B33	Z-diode	Dual, 33V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
PZW	-	BZB84-B33	Z-diode	Dual, 33V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
q	-	AX6903CA	Vdet-IC	4.0V±1.5%, -Reset PPO	SC-70	16vda	VD7	3b	Axl
Q	-	2SB1197-Q	Si-pnp	AF, 40V, 800mA, 200mW, B=120..270, >50MHz	SOT-23	16ta	-	3a	Wtr
Q	-	SB05-03C	Si-diode	SBR, HF, 30V, 500mA, Vf<0.55V(500mA), 16pF, 10ns	CP	16dc	-	3a	San
Q	-	SB05-03Q	Si-diode	SBR, HF, 30V, 500mA, Vf<0.55V(500mA), 16pF, 10ns	MCP	16dc	-	3a	San
Q	cr	ELM7536NEB	Vdet-IC	3.6V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
Q	cs	ELM7536CEB	Vdet-IC	3.6V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
Q0	-	ELM7640HBB	Vdet-IC	4.0V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Q0	-	R1100D401C	LVR-IC	µ-low Icc, 4.0V±2%, 180mA	SON1408-3	18vj	VR1	3d	Ric
Q0	-	R3130N40AA	Vdet-IC	4V±1.5%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3b	Ric
Q1	-	ELM7641HBB	Vdet-IC	4.1V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Q1	-	R3130N44AA	Vdet-IC	4.4V±1.5%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3b	Ric
Q17	-	CHT817WPT-Q	Si-npn	AF, Sw, 45V, 500mA, B=100..250, 170MHz	SOT-323	16ta	-	3a	Chm
Q2	-	2SC1321-2	Si-npn	UHF, 30V, 10mA, 100mW, B=40..80, 900MHz	SOT-23	16ta	-	3a	Nec
Q2	-	2SC2813-2	Si-npn	RF, GP, 25V, 30mA, 150mW, B=40..80, 600MHz	CP	16ta	-	3a	San
Q2	-	ELM7642HBB	Vdet-IC	4.2V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Q2	-	R3130N26AA3	Vdet-IC	2.6V±1.5%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3b	Ric
Q21	-	GS810C21EUD	Vdet-IC	2.1V±1.5%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
Q24	-	GS810C24EUD	Vdet-IC	2.4V±1.5%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
Q26	-	GS810CREUD	Vdet-IC	2.63V±1.5%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
Q27	-	GS810C27SEUD	Vdet-IC	2.7V±1.5%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
Q29	-	GS810CSEUD	Vdet-IC	2.93V±1.5%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
Q3	-	2SC1321-3	Si-npn	UHF, 30V, 10mA, 100mW, B=60..120, 900MHz	SOT-23	16ta	-	3a	Nec
Q3	-	2SC2813-3	Si-npn	RF, GP, 25V, 30mA, 150mW, B=60..120, 600MHz	CP	16ta	-	3a	San
Q3	-	ELM7643HBB	Vdet-IC	4.3V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Q3	-	R3130N29AA3	Vdet-IC	2.9V±1.5%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3b	Ric
Q30	-	GS810CTEUD	Vdet-IC	3.08V±1.5%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
Q4	-	2SC1321-4	Si-npn	UHF, 30V, 10mA, 100mW, B=90..180, 900MHz	SOT-23	16ta	-	3a	Nec
Q4	-	2SC2813-4	Si-npn	RF, GP, 25V, 30mA, 150mW, B=90..180, 600MHz	CP	16ta	-	3a	San
Q4	-	ELM7644HBB	Vdet-IC	4.4V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Q4	-	KA4F3P	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=2k2/10k	SOT-416	16ta	-	3a	Nec
Q4	-	R3130N30AA8	Vdet-IC	3V±1.5%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3b	Ric
Q4	-	SP809EK-2-9	Vdet-IC	2.9V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Sip
Q40	-	GS810CJEUD	Vdet-IC	4.0V±1.5%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
Q43	-	GS810CMEUD	Vdet-IC	4.38V±1.5%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
Q46	-	GS810CLEUD	Vdet-IC	4.63V±1.5%, +Reset PPO, 30ms	SOT-23	16vdc	VD7	3g	Vs
Q5	-	2SC1321-5	Si-npn	UHF, 30V, 10mA, 100mW, B=135..270, 900MHz	SOT-23	16ta	-	3a	Nec
Q5	-	2SC2813-5	Si-npn	RF, GP, 25V, 30mA, 150mW, B=135..270, 600MHz	CP	16ta	-	3a	San
Q5	-	ELM7645HBB	Vdet-IC	4.5V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Q5	-	R3130N46AA5	Vdet-IC	4.6V±1.5%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3b	Ric
Q6	-	ELM7646HBB	Vdet-IC	4.6V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Q6	-	R3130N23AA	Vdet-IC	2.3V±1.5%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3b	Ric
Q7	-	ELM7647HBB	Vdet-IC	4.7V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Q7	-	KN4F3P	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1/R2=2k2/10k	SOT-416	16ta	-	3a	Nec
Q7	-	R3130N28AA	Vdet-IC	2.8V±1.5%, -Reset PPO, 50ms	SOT-23	16vdc	VD7	3b	Ric
Q8	-	ELM7648HBB	Vdet-IC	4.8V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Q9	-	ELM7649HBB	Vdet-IC	4.9V±2%, +Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
QA	-	2SC2620-A	Si-npn	VHF Mix, Osc, 30V, 20mA, 100mW, B=35..70, 940MHz	SOT-23	16ta	-	3a	Ren
QA	-	RN1321A	Si-npn-Digi	Mute, 15V, 500mA, 300mW, R1/R2=1k/1k	SOT-323	16ta	-	3a	Tos
QA	-	RN1421	Si-npn-Digi	Mute, 50V, 800mA, 300mW, R1/R2=1k/1k	SOT-346	16ta	-	3a	Tos
QAA	-	BC846A	Si-npn	GP, 80V, 100mA, 200mW, B=110..220, >300MHz	SOT-23	16ta	-	3a	Auk
QAA	-	BC846FA	Si-npn	GP, 80V, 100mA, 200mW, B=110..220, 250MHz	SOT-23F	18ta	-	3a	Auk
QAB	-	BC846B	Si-npn	GP, 80V, 100mA, 200mW, B=200..450, >300MHz	SOT-23	16ta	-	3a	Auk
QAB	-	BC846FB	Si-npn	GP, 80V, 100mA, 200mW, B=200..450, 250MHz	SOT-23F	18ta	-	3a	Auk
QAC	-	BC846C	Si-npn	GP, 80V, 100mA, 200mW, B=420..800, >300MHz	SOT-23	16ta	-	3a	Auk
QAC	-	BC846FC	Si-npn	GP, 80V, 100mA, 200mW, B=420..800, 250MHz	SOT-23F	18ta	-	3a	Auk
QB	-	2SC2620-B	Si-npn	VHF Mix, Osc, 30V, 20mA, 100mW, B=60..120, 940MHz	SOT-23	16ta	-	3a	Ren
QB	-	RN1322A	Si-npn-Digi	Mute, 15V, 500mA, 300mW, R1/R2=2k2/2k2	SOT-323	16ta	-	3a	Tos
QB	-	RN1422	Si-npn-Digi	Mute, 50V, 800mA, 300mW, R1/R2=2.2k/2.2k	SOT-346	16ta	-	3a	Tos
QC	-	2SC2620-C	Si-npn	VHF Mix, Osc, 30V, 20mA, 100mW, B=100..200, 940MHz	SOT-23	16ta	-	3a	Ren
QC	-	RN1323A	Si-npn-Digi	Mute, 15V, 500mA, 300mW, R1/R2=4k7/4k7	SOT-323	16ta	-	3a	Tos
QC	-	RN1423	Si-npn-Digi	Mute, 50V, 800mA, 300mW, R1/R2=4.7k/4.7k	SOT-346	16ta	-	3a	Tos
QD	-	RN1324A	Si-npn-Digi	Mute, 15V, 500mA, 300mW, R1/R2=10k/10k	SOT-323	16ta	-	3a	Tos
QD	-	RN1424	Si-npn-Digi	Mute, 50V, 800mA, 300mW, R1/R2=10k/10k	SOT-346	16ta	-	3a	Tos
QE	-	RN1325A	Si-npn-Digi	Mute, 15V, 500mA, 300mW, R1/R2=0k47k/10k	SOT-323	16ta	-	3a	Tos
QE	-	RN1425	Si-npn-Digi	Mute, 50V, 800mA, 300mW, R1/R2=0k47k/10k	SOT-346	16ta	-	3a	Tos
QF	-	RN1326A	Si-npn-Digi	Mute, 15V, 500mA, 300mW, R1/R2=1k/10k	SOT-323	16ta	-	3a	Tos
QF	-	RN1426	Si-npn-Digi	Mute, 50V, 800mA, 300mW, R1/R2=1k/10k	SOT-346	16ta	-	3a	Tos
QG	-	RN1327A	Si-npn-Digi	Mute, 15V, 500mA, 300mW, R1/R2=2k2/10k	SOT-323	16ta	-	3a	Tos
QG	-	RN1427	Si-npn-Digi	Mute, 50V, 800mA, 300mW, R1/R2=2.2k/10k	SOT-346	16ta	-	3a	Tos
QI-	-	2SC4196	Si-npn	UHF-Osc, 25V, 50mA, 150mW, B=50..180, 2.4GHz	SC-59A	16ta	-	3a	Ren
QI-	-	2SC4261	Si-npn	VHF/UHF, 25V, 50mA, 100mW, B=50..180, >1.8GHz	SOT-323	16ta	-	3a	Ren
QJ	-	MCP100T-270I	Vdet-IC	2.7V±75mV, -Reset PPO	SOT-23	16vdb	VD7	3a	Mcc
QJY	-	FM803JP3X	Vdet-IC	4.0V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3a	F
QK	-	MCP100T-300I	Vdet-IC	3.0V±75mV, -Reset PPO	SOT-23	16vdb	VD7	3a	Mcc
QL	-	MCP100T-315I	Vdet-IC	3.15V±75mV, -Reset PPO	SOT-23	16vdb	VD7	3a	Mcc
QL3	-	2SA1580-3	Si-pnp	Vid, 70V, 50mA, 200mW, B=60..120, 700MHz	SOT-23	16ta	-	3a	San
QL4	-	2SA1580-4	Si-pnp	Vid, 70V, 50mA, 200mW, B=90..180, 700MHz	SOT-23	16ta	-	3a	San
QL5	-	2SA1580-5	Si-pnp	Vid, 70V, 50mA, 200mW, B=60..120, 700MHz	SOT-23	16ta	-	3a	San
QLY	-	FM803LP3X	Vdet-IC	4.63V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3a	F
QM	-	MCP100T-450I	Vdet-IC	4.5V±150mV, -Reset PPO	SOT-23	16vdb	VD7	3a	Mcc
QMY	-	FM803MP3X	Vdet-IC	4.38V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3a	F
QN	-	MCP100T-460I	Vdet-IC	4.6V±150mV, -Reset PPO	SOT-23	16vdb	VD7	3a	Mcc
QO	-	2SC2714-O	Si-npn	VHF Mix/Osc, 40V, 20mA, 100mW, B=40..80, 550MHz	SC-59	16ta	-	3a	Tos
QO	-	2SC4215-O	Si-npn	RF, FM/AM, 40V, 20mA, 100mW, B=70..140, 550MHz	SOT-323	16ta	-	3a	Tos
QO	-	2SC4915-O	Si-npn	FM, RF, Mix, IF, 40V, 20mA, 100mW, 550MHz, B=70..140	SOT-23	16ta	-	3a	Tos
QO	-	KTC4080-O	Si-npn	GP, 50V, 20mA, 100mW, B=70..140, >550MHz	SOT-323	16ta	-	3f	Kec
QO	-	MCP100T-475I	Vdet-IC	4.75V±150mV, -Reset PPO	SOT-23	16vdb	VD7	3a	Mcc
QP	-	MCP100T-485I	Vdet-IC	4.85V±150mV, -Reset PPO	SOT-23	16vdb	VD7	3a	Mcc
QR	-	2SC2714-R	Si-npn	VHF Mix/Osc, 40V, 20mA, 100mW, B=70..140, 550MHz	SC-59	16ta	-	3a	Tos
QR	-	2SC4215-R	Si-npn	RF, FM/AM, 40V, 20mA, 100mW, B=40..80, 550MHz	SOT-323	16ta	-	3a	Tos
QR	-	2SC4915-R	Si-npn	FM, RF, Mix, IF, 40V, 20mA, 100mW, 550MHz, B=40..80	SOT-23	16ta	-	3a	Tos
QR	-	KTC4080-R	Si-npn	GP, 50V, 20mA, 100mW, B=40..80, >550MHz	SOT-323	16ta	-	3f	Kec
QR	-	MCP809T-270I	Vdet-IC	2.625V±75mV, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
QRY	-	FM803RP3X	Vdet-IC	2.63V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3a	F



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
QS	-	MCP809T-300I	Vdet-IC	2.925V±75mV, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
QSY	-	FM803SP3X	Vdet-IC	2.93V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3a	F
QT	-	CHT4126PT	Si-pnp	AF, Sw, 25V, 200mA, B=120..360, 250MHz	SOT-23	16ta	-	3a	Chm
QT	-	MCP809T-315I	Vdet-IC	3.075V±75mV, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
QT4	-	2SC4412-4	Si-npn	CTV-Vid, 300V, 50mA, 250mW, B=100..200, 70MHz	CP	16ta	-	3a	San
QT5	-	2SC4412-5	Si-npn	CTV-Vid, 300V, 50mA, 250mW, B=160..320, 70MHz	CP	16ta	-	3a	San
QTY	-	FM803TP3X	Vdet-IC	3.08V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3a	F
QU	-	MCP809T-450I	Vdet-IC	4.375V±150mV, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
QV	-	MCP809T-460I	Vdet-IC	4.475V±150mV, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
QW	-	MCP809T-475I	Vdet-IC	4.625V±150mV, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
QY	-	2SC2714-Y	Si-npn	VHF Mix/Osc, 40V, 20mA, 100mW, B=120..240, 550MHz	SC-59	16ta	-	3a	Tos
QY	-	2SC3863	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, B>50, R1/R2=2.2k/10k	CP	16ta	-	3a	San
QY	-	2SC4215-Y	Si-npn	RF, FM/AM, 40V, 20mA, 100mW, B=100..200, 550MHz	SOT-323	16ta	-	3a	Tos
QY	-	2SC4498	Si-npn-Digi	Sw, 50V, 100mA, R1/R2=2.2k/10k	SOT-323	16ta	-	3a	San
QY	-	2SC4915-Y	Si-npn	FM, RF, Mix, IF, 40V, 20mA, 100mW, 550MHz, B=100..200	SOT-23	16ta	-	3a	Tos
QY	-	KTC4080-Y	Si-npn	GP, 50V, 20mA, 100mW, B=100..200, >550MHz	SOT-323	16ta	-	3f	Kec
QZ	-	MCP809T-485I	Vdet-IC	4.725V±150mV, -Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
r	-	AX6903DA	Vdet-IC	3.08V±1.5%, -Reset PPO	SC-70	16vda	VD7	3b	Axl
R	-	2SB1197-R	Si-pnp	AF, 40V, 800mA, 200mW, B=180..390, >50MHz	SOT-23	16ta	-	3a	Wtr
R	-	2SC2480	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=800..1600, 1.3GHz	SC-59	16ta	-	3a	Pan
R	cr	ELM7537NEB	Vdet-IC	3.7V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
R	cs	ELM7537CEB	Vdet-IC	3.7V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
R0	-	ELM7630LCB	Vdet-IC	3.0V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
R0	-	ELM9730CBB	Vdet-IC	3.0V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
R0	-	R3130N40BA	Vdet-IC	4V±1.5%, -Reset PPO, 100ms	SOT-23	16vdc	VD7	3b	Ric
R0	-	TC54VN5002ECB	Vdet-IC	5.0V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
R01	-	CHRT5993TGP	Si-npn	UHF, 11V, 50mA, B=56..270, 3.2GHz	SOT-416	16ta	-	3a	Chm
R01	-	CHRT5993WTPT	Si-npn	UHF, Sw, 11V, 50mA, B=56..270, 3.2GHz	SOT-323	16ta	-	3a	Chm
R01	-	KSR1101	Si-npn-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=4k7/4k7	SOT-23	16ta	-	3a	Sam
R02	-	KSR1102	Si-npn-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	Sam
R03	-	KSR1103	Si-npn-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=22k/22k	SOT-23	16ta	-	3a	Sam
R03	-	XC61CN5002M	Vdet-IC	5.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
R03	-	XE61CN5045MR	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
R04	-	KSR1104	Si-npn-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=47k/47k	SOT-23	16ta	-	3a	Sam
R05	-	KSR1105	Si-npn-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=4k7/10k	SOT-23	16ta	-	3a	Sam
R05	-	LN61FN5012M	Vdet-IC	5.0V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
R05	-	TC51N5002ECB	Vdet-IC	5.0V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
R05	-	XC61FN5012M	Vdet-IC	5.0V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
R05	-	XC61HN5012MR	Vdet-IC	5.0V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
R06	-	KSR1106	Si-npn-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=10k/47k	SOT-23	16ta	-	3a	Sam
R06	-	LN61FN5042M	Vdet-IC	5.0V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
R06	-	XC61FN5042M	Vdet-IC	5.0V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
R06	-	XC61HN5042MR	Vdet-IC	5.0V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
R07	-	KSR1107	Si-npn-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=22k/47k	SOT-23	16ta	-	3a	Sam
R07	-	LN61FN5052M	Vdet-IC	5.0V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
R07	-	XC61FN5052M	Vdet-IC	5.0V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
R07	-	XC61HN5052MR	Vdet-IC	5.0V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
R08	-	KSR1108	Si-npn-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=47k/22k	SOT-23	16ta	-	3a	Sam
R09	-	KSR1109	Si-npn-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1=4k7	SOT-23	16ta	-	3a	Sam
R0A	-	LM4040AIM3-10.0	Vref-IC	µPower, Precision, Shunt, 10.0V±0.1%	SOT-23	16dk	RF1	3a	Nsc
R0B	-	LM4040BIM3-10.0	Vref-IC	µPower, Precision, Shunt, 10.0V±0.2%	SOT-23	16dk	RF1	3a	Nsc
R0C	-	LM4040CIM3-10.0	Vref-IC	µPower, Precision, Shunt, 10.0V±0.5%	SOT-23	16dk	RF1	3a	Nsc
R0D	-	LM4040DIM3-10.0	Vref-IC	µPower, Precision, Shunt, 10.0V±1%	SOT-23	16dk	RF1	3a	Nsc
R1	-	BFR93	Si-npn	UHF-A-Band, 15V, 30mA, 300mW, B>40, >5GHz	SOT-23	16ta	-	3a	Ste
R1	-	BZX84C4V7T	Z-diode	4.4..5.0V, Zzt=80Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
R1	-	CHDTA113TKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=1k	SOT-23	16ta	-	3a	Chm
R1	-	CZRH3-55C4V7	Z-diode	4.7..5.0V, Zzt=80Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
R1	-	ELM7631LCB	Vdet-IC	3.1V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
R1	-	ELM9731CBB	Vdet-IC	3.1V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
R1	-	R3130N44BA	Vdet-IC	4.4V±1.5%, -Reset PPO, 100ms	SOT-23	16vdc	VD7	3b	Ric
R1	-	SRC1201E	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=4.7k/4.7k	SOT-523	16ta	-	3a	Auk
R1	-	SRC1201EF	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=4.7k/47k	SOT-523F	18ta	-	3a	Auk
R1	-	SRC1201U	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3a	Auk
R1	-	SRC1201UF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/4.7k	SOT-323F	18ta	-	3a	Auk
R1	-	TC54VN5102ECB	Vdet-IC	5.1V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
R1	-	TN2010T	n-MOSFET	V-MOS, 200V, 120mA, 360mW, <9.5Ω(0.5A)	SOT-23	16fh	-	3a	Six
R10	-	KSR1110	Si-npn-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1=10k	SOT-23	16ta	-	3a	Sam
R11	-	CM7R250-11B-T	LVR-IC	LDO, 1.1V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R11	-	KSR1111	Si-npn-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1=22k	SOT-23	16ta	-	3a	Sam
R11	-	LM385M3-1.2	Vref-IC	µPower, 1.2V±0.5%	SOT-23	16dk	RF1	3a	Nsc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R11A	-	REF1112A	Vref-IC	Precision, Shunt, 1.25V, 0.2%, <10ppm/°C	SOT-23	16dk	RF1	3a	Bb
R11B	-	ML62113M	LVR-IC	1.1V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R12	-	CM7R250-12B-T	LVR-IC	LDO, 1.2V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R12	-	KSR1112	Si-npn-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1=47k	SOT-23	16ta	-	3a	Sam
R12	-	LM385M3-2.5	Vref-IC	µPower, 2.5V±0.5%	SOT-23	16dk	RF1	3a	Nsc
R12B	-	ML62123M	LVR-IC	1.2V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R13	-	2SC4885	Si-npn	UHF-Osc, 25V, 50mA, 120mW, 3.5GHz, B=60..150	SOT-323	16ta	-	3a	Nec
R13	-	CM7R250-13B-T	LVR-IC	LDO, 1.3V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R13	-	KSR1113	Si-npn-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=2k2/47k	SOT-23	16ta	-	3a	Sam
R13	-	XC61CN5102M	Vdet-IC	5.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
R13	-	XE61CN5145MR	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
R13B	-	ML62133M	LVR-IC	1.3V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R14	-	CM7R250-14B-T	LVR-IC	LDO, 1.4V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R14	-	KSR1114	Si-npn-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=4k7/47k	SOT-23	16ta	-	3a	Sam
R14B	-	ML62143M	LVR-IC	1.4V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R15	-	CM7R250-15B-T	LVR-IC	LDO, 1.5V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R15	-	LN61FN5112M	Vdet-IC	5.1V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
R15	-	TC51N5102ECB	Vdet-IC	5.1V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
R15	-	XC61FN5112M	Vdet-IC	5.1V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
R15	-	XC61HN5112MR	Vdet-IC	5.1V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
R15B	-	ML62153M	LVR-IC	1.5V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R16	-	CM7R250-16B-T	LVR-IC	LDO, 1.6V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R16	-	LN61FN5142M	Vdet-IC	5.1V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
R16	-	XC61FN5142M	Vdet-IC	5.1V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
R16	-	XC61HN5142MR	Vdet-IC	5.1V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
R16B	-	ML62163M	LVR-IC	1.6V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R17	-	CHT817WPT-R	Si-npn	AF, Sw, 45V, 500mA, B=160..400, 170MHz	SOT-323	16ta	-	3a	Chm
R17	-	CM7R250-17B-T	LVR-IC	LDO, 1.7V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R17	-	LN61FN5152M	Vdet-IC	5.1V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
R17	-	XC61FN5152M	Vdet-IC	5.1V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
R17	-	XC61HN5152MR	Vdet-IC	5.1V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
R17B	-	ML62173M	LVR-IC	1.7V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R18	-	CM7R250-18B-T	LVR-IC	LDO, 1.8V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R18B	-	ML62183M	LVR-IC	1.8V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R19	-	CM7R250-19B-T	LVR-IC	LDO, 1.9V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R19B	-	ML62193M	LVR-IC	1.9V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R1A	-	LM4041AIM3-1.2	Vref-IC	µPower, Precision, Shunt, 1.225V±0.1%	SOT-23	16dk	RF1	3a	Nsc
R1A	-	MMBTH10	Si-npn	RF, 30V, 25mA, 225mW, B>60, >650MHz	SOT-23	16ta	-	3a	Pjt
R1A	-	MMST3904	Si-npn	GP, 60V, 200mA, 250mW, B=100..300, >300MHz	SC-59	16ta	-	3a	Rhm
R1A	-	SST3904	Si-npn	GP, 60V, 100mA, 200mW, B= 100..300, >300MHz	SOT-23	16ta	-	3a	Rhm
R1A	-	UMT3904	Si-npn	GP, 60V, 100mA, 200mW, B= 100..300, >300MHz	SOT-323	16ta	-	3a	Rhm
R1B	-	CM7R250-11A-T	LVR-IC	LDO, 1.15V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R1B	-	LM4041BIM3-1.2	Vref-IC	µPower, Precision, Shunt, 1.225V±0.2%	SOT-23	16dk	RF1	3a	Nsc
R1B	-	MMST2222	Si-npn	GP, 60V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Rhm
R1B	-	SST2222	Si-npn	GP, 60V, 600mA, 330mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Rhm
R1C	-	CM7R250-12A-T	LVR-IC	LDO, 1.25V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R1C	-	LM4041CIM3-1.2	Vref-IC	µPower, Precision, Shunt, 1.225V±0.5%	SOT-23	16dk	RF1	3a	Nsc
R1C	-	MMSTA20	Si-npn	GP, 40V, 100mA, 600mW, B=40..400, >125MHz	SC-59	16ta	-	3a	Rhm
R1C	-	SSTA20	Si-npn	AF, 40V, 200mA, B>120, >125MHz	SOT-23	16ta	-	3a	Rhm
R1D	-	CM7R250-13A-T	LVR-IC	LDO, 1.35V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R1D	-	LM4041DIM3-1.2	Vref-IC	µPower, Precision, Shunt, 1.225V±1%	SOT-23	16dk	RF1	3a	Nsc
R1E	-	CM7R250-14A-T	LVR-IC	LDO, 1.45V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R1E	-	LM4041EIM3-1.2	Vref-IC	µPower, Precision, Shunt, 1.225V±2%	SOT-23	16dk	RF1	3a	Nsc
R1F	-	CM7R250-15A-T	LVR-IC	LDO, 1.55V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R1G	-	CM7R250-16A-T	LVR-IC	LDO, 1.65V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R1G	-	MMSTA06	Si-npn	GP, 80V, 500mA, 350mW, B>100, >100MHz	SC-59	16ta	-	3a	Rhm
R1G	-	SSTA06	Si-npn	AF, 80V, 500mA, B>100, >100MHz	SOT-23	16ta	-	3a	Rhm
R1H	-	CM7R250-17A-T	LVR-IC	LDO, 1.75V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R1H	-	SSTA05	Si-npn	GP, 60V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	Rhm
R1I	-	CM7R250-18A-T	LVR-IC	LDO, 1.85V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R1J	-	CM7R250-19A-T	LVR-IC	LDO, 1.95V±3%, 150mA	SOT-23	16cg	VR1	3a	Can
R1J	-	SST6427	Si-npn-Darl	AF, 40V, 500mA, 360mW, B=10k..100k, >130MHz	SOT-23	16ta	-	3a	Rhm
R1K	-	MMST6428	Si-npn	GP, 60V, 200mA, 350mW, B=250..650, 100..700MHz	SOT-23	16ta	-	3a	Rhm
R1K	-	SST6428	Si-npn	AF, 60V, 200mA, B=250..650, >100MHz	SOT-23	16ta	-	3a	Rhm
R1M	-	2SD2142K	Si-npn-Darl	GP, 40V, 300mA, 200MHz, B>5000	SOT-23	16ta	-	3a	Rhm
R1M	-	MMSTA13	Si-npn-Darl	GP, 30V, 300mA, 300mW, B>5000, >125MHz	SC-59	16ta	-	3a	Rhm
R1M	-	SSTA13	Si-npn-Darl	AF, 30V, 500mA, B>10000, >125MHz	SOT-23	16ta	-	3a	Rhm
R1N	-	MMSTA14	Si-npn-Darl	GP, 30V, 300mA, 300mW, B>10000, >125MHz	SC-59	16ta	-	3a	Rhm
R1N	-	SSTA14	Si-npn-Darl	AF, 30V, 500mA, B>20000, >125MHz	SOT-23	16ta	-	3a	Rhm
R1O	-	MMST5088	Si-npn	GP, 35V, 50mA, 350mW, B=300..900, >50MHz	SOT-23	16ta	-	3a	Rhm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R1p	-	BFR93	Si-npn	UHF-A-Band, 15V, 30mA, 300mW, B>40, >5GHz	SOT-23	16ta	-	3a	Phi
R1P	-	MMST2222A	Si-npn	GP, 75V, 600mA, 330mW, B=120..360, >300MHz	SC-59	16ta	-	3a	Rhm
R1P	-	SST2222A	Si-npn	GP, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Rhm
R1P	-	UMT2222A	Si-npn	GP, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-323	16ta	-	3a	Rhm
R1Q	-	SST5088	Si-npn	AF, 35V, 200mA, B=300..900, >50MHz	SOT-23	16ta	-	3a	Rhm
R1R	-	MMST5089	Si-npn	AF, 30V, 50mA, 350mW, B=400..1200, >50MHz	SOT-23	16ta	-	3a	Rhm
R1R	-	SST5089	Si-npn	AF, 30V, 200mA, B=400..1200, >50MHz	SOT-23	16ta	-	3a	Rhm
R2	-	2SC2351-2	Si-npn	Fast-Sw, UHF, 20V, 70mA, 200mW, B=40..120, 4.5Hz	SOT-23	16ta	-	3a	Nec
R2	-	2SC2351-P	Si-npn	Fast-Sw, UHF, 20V, 70mA, 200mW, B=40..120, 4.5Hz	SOT-23	16ta	-	3a	Nec
R2	-	2SC4225-2	Si-npn	VHF/UHF, 25V, 70mA, 160mW, B=40..120, 4GHz	SOT-323	16ta	-	3a	Nec
R2	-	BFR93AL	Si-npn	VHF.UHF, 15V, 35mA, 306mW, B>40, >3GHz	SOT-23	16ta	-	3a	Mot
R2	-	BFR93AT	Si-npn	UHF-A-Band, 15V, 30mA, 300mW, B>40, >5GHz	SOT-416	16ta	-	3a	Phi
R2	-	BFR93AW	Si-npn	UHF-A-Band, 15V, 30mA, 300mW, B>40, >5GHz	SOT-323	16ta	-	3a	Phi
R2	-	BZX84C5V1T	Z-diode	4.8..5.4V, Zzt=60Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
R2	-	CZRH3-55C5V1	Z-diode	5.1..5.40V, Zzt=60Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
R2	-	ELM7632LCB	Vdet-IC	3.2V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
R2	-	ELM9732CBB	Vdet-IC	3.2V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
R2	-	NE02133-2	Si-npn	Fast-Sw, UHF, 25V, 70mA, 200mW, B=40..120, 4.5Hz	SOT-23	16ta	-	3a	Cel
R2	-	NE02133-P	Si-npn	Fast-Sw, UHF, 25V, 70mA, 200mW, B=40..120, 4.5Hz	SOT-23	16ta	-	3a	Cel
R2	-	R3130N26BA3	Vdet-IC	2.6V±1.5%, -Reset PPO, 100ms	SOT-23	16vdc	VD7	3b	Ric
R2	-	SRC1202E	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10k/10k	SOT-523	16ta	-	3a	Auk
R2	-	SRC1202EF	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10k/10k	SOT-523F	18ta	-	3a	Auk
R2	-	SRC1202U	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-323	16ta	-	3a	Auk
R2	-	SRC1202UF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-323F	18ta	-	3a	Auk
R2	-	TC54VN5202ECB	Vdet-IC	5.2V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
R20	-	CM7R250-20B-T	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R20B	-	ML62202M	LVR-IC	2.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R21	-	CM7R250-21B-T	LVR-IC	LDO, 2.1V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R21	-	GS810C21EUE	Vdet-IC	2.1V±1.5%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
R21B	-	ML62212M	LVR-IC	2.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R22	-	2SC4226-22	Si-npn	VHF/UHF, 20V, 100mA, 150mW, B=30..60, 4.5GHz	SOT-323	16ta	-	3a	Nec
R22	-	CM7R250-22B-T	LVR-IC	LDO, 2.2V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R22	-	NE85630-22	Si-npn	VHF/UHF, 20V, 100mA, 150mW, B=30..60, 4.5GHz	SOT-323	16ta	-	3a	Cel
R22B	-	ML62222M	LVR-IC	2.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R23	-	2SC3356-Q	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=50..100, 7GHz	SOT-23	16ta	-	3a	Nec
R23	-	2SC4226-23	Si-npn	VHF/UHF, 20V, 100mA, 150mW, B=40..80, 4.5GHz	SOT-323	16ta	-	3a	Nec
R23	-	CM7R250-23B-T	LVR-IC	LDO, 2.3V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R23	-	NE85630-23	Si-npn	VHF/UHF, 20V, 100mA, 150mW, B=40..80, 4.5GHz	SOT-323	16ta	-	3a	Cel
R23	-	NE85633-23	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=50..100, 7GHz	SOT-23	16ta	-	3a	Cel
R23	-	NE85633-Q	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=50..100, 7GHz	SOT-23	16ta	-	3a	Cel
R23	-	XC61CN5202M	Vdet-IC	5.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
R23	-	XE61CN5245MR	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
R23B	-	ML62232M	LVR-IC	2.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R24	-	2SC3356-R	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=80..160, 7GHz	SOT-23	16ta	-	3a	Nec
R24	-	2SC4226-24	Si-npn	VHF/UHF, 20V, 100mA, 150mW, B=70..140, 4.5GHz	SOT-323	16ta	-	3a	Nec
R24	-	CM7R250-24B-T	LVR-IC	LDO, 2.4V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R24	-	GS810C24EUE	Vdet-IC	2.4V±1.5%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
R24	-	NE85630-24	Si-npn	VHF/UHF, 20V, 100mA, 150mW, B=70..140, 4.5GHz	SOT-323	16ta	-	3a	Cel
R24	-	NE85633-24	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=80..160, 7GHz	SOT-23	16ta	-	3a	Cel
R24	-	NE85633-R	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=80..160, 7GHz	SOT-23	16ta	-	3a	Cel
R24	-	SST5424	Si-npn	VHF/UHF, 30V, 50mA, >600MHz	SOT-23	16ta	-	3a	Rhm
R24B	-	ML62242M	LVR-IC	2.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R25	-	2SC3356-S	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=125..250, 7GHz	SOT-23	16ta	-	3a	Nec
R25	-	2SC3838Q	Si-npn	HF, TV-Tun, 11V, 50mA, 200mW, 3.2GHz, B=120..270	SC-59	16ta	-	3a	Wtr
R25	-	2SC4226-25	Si-npn	VHF/UHF, 20V, 100mA, 150mW, B=125..250, 4.5GHz	SOT-323	16ta	-	3a	Nec
R25	-	CM7R250-25B-T	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R25	-	LN61FN5212M	Vdet-IC	5.2V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
R25	-	NE85630-25	Si-npn	VHF/UHF, 20V, 100mA, 150mW, B=125..250, 4.5GHz	SOT-323	16ta	-	3a	Cel
R25	-	NE85633-25	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=125..250, 7GHz	SOT-23	16ta	-	3a	Cel
R25	-	NE85633-S	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=125..250, 7GHz	SOT-23	16ta	-	3a	Cel
R25	-	TC51N5202ECB	Vdet-IC	5.2V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
R25	-	XC61FN5212M	Vdet-IC	5.2V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
R25	-	XC61HN5212MR	Vdet-IC	5.2V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
R25B	-	ML62252M	LVR-IC	2.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R26	-	CM7R250-26B-T	LVR-IC	LDO, 2.6V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R26	-	GS810CREUE	Vdet-IC	2.63V±1.5%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
R26	-	LN61FN5242M	Vdet-IC	5.2V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
R26	-	XC61FN5242M	Vdet-IC	5.2V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
R26	-	XC61HN5242MR	Vdet-IC	5.2V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
R26B	-	ML62262M	LVR-IC	2.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R27	-	CM7R250-27B-T	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R27	-	GS810C27SEUE	Vdet-IC	2.7V±1.5%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
R27	-	LN61FN5252M	Vdet-IC	5.2V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
R27	-	XC61FN5252M	Vdet-IC	5.2V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
R27	-	XC61HN5252MR	Vdet-IC	5.2V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
R27B	-	ML62272M	LVR-IC	2.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R28	-	CM7R250-28B-T	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R28B	-	ML62282M	LVR-IC	2.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R29	-	CM7R250-29B-T	LVR-IC	LDO, 2.9V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R29	-	GS810CSEUE	Vdet-IC	2.93V±1.5%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
R29B	-	ML62292M	LVR-IC	2.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R2A	-	CM7R250-20A-T	LVR-IC	LDO, 2.05V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R2A	-	LM4040AIM3-2.5	Vref-IC	µPower, Precision, Shunt, 2.50V±0.1%	SOT-23	16dk	RF1	3a	Nsc
R2A	-	MMST3906	Si-pnp	GP, 40V, 200mA, 250mW, B=60..300, >250MHz	SC-59	16ta	-	3a	Rhm
R2A	-	SST3906	Si-pnp	GP, 40V, 200mA, 330mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Rhm
R2A	-	UMT3906	Si-pnp	Sw, AF, 60/40V, 100mA, 250mW, B=100..300, >250MHz	SOT-323	16ta	-	3a	Rhm
R2B	-	CM7R250-21A-T	LVR-IC	LDO, 2.15V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R2B	-	LM4040B25FTA	Vref-IC	µPower, Precision, Shunt, 2.50V±0.2%	SOT-23	16dk	RF1	3a	Zx
R2B	-	LM4040BIM3-2.5	Vref-IC	µPower, Precision, Shunt, 2.50V±0.2%	SOT-23	16dk	RF1	3a	Nsc
R2B	-	MMST2907	Si-pnp	GP, 40V, 600mA, 330mW, B=100..300, >200MHz	SC-59	16ta	-	3a	Rhm
R2B	-	SST2907	Si-pnp	GP, 40V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Rhm
R2C	-	CM7R250-22A-T	LVR-IC	LDO, 2.25V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R2C	-	LM4040C25FTA	Vref-IC	µPower, Precision, Shunt, 2.50V±0.5%	SOT-23	16dk	RF1	3a	Zx
R2C	-	LM4040CIM3-2.5	Vref-IC	µPower, Precision, Shunt, 2.50V±0.5%	SOT-23	16dk	RF1	3a	Nsc
R2C	-	MMSTA70	Si-pnp	GP, 40V, 100mA, 350mW, B=40..100, >125MHz	SC-59	16ta	-	3a	Rhm
R2D	-	CM7R250-23A-T	LVR-IC	LDO, 2.35V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R2D	-	LM4040D25FTA	Vref-IC	µPower, Precision, Shunt, 2.50V±1%	SOT-23	16dk	RF1	3a	Zx
R2D	-	LM4040DIM3-2.5	Vref-IC	µPower, Precision, Shunt, 2.50V±1%	SOT-23	16dk	RF1	3a	Nsc
R2E	-	CM7R250-24A-T	LVR-IC	LDO, 2.45V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R2E	-	LM4040EIM3-2.5	Vref-IC	µPower, Precision, Shunt, 2.50V±2%	SOT-23	16dk	RF1	3a	Nsc
R2F	-	CM7R250-25A-T	LVR-IC	LDO, 2.55V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R2F	-	MMST2907A	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SC-59	16ta	-	3a	Rhm
R2F	-	SST2907A	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Rhm
R2F	-	UMT2907A	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-323	16ta	-	3a	Rhm
R2G	-	CM7R250-26A-T	LVR-IC	LDO, 2.65V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R2G	-	MMSTA56	Si-pnp	AF-Drv, 80V, 500mA, 300mW, B>100, >50MHz	SC-59	16ta	-	3a	Rhm
R2G	-	SSTA56	Si-pnp	AF-Drv, 80V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3a	Rhm
R2H	-	CM7R250-27A-T	LVR-IC	LDO, 2.75V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R2H	-	SSTA55	Si-pnp	AF, 60V, 500mA, B>100, >50MHz	SOT-23	16ta	-	3a	Rhm
R2I	-	CM7R250-28A-T	LVR-IC	LDO, 2.85V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R2J	-	CM7R250-29A-T	LVR-IC	LDO, 2.95V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R2K	-	MMST8598	Si-pnp	AF, 60V, 200mA, B=100..300, >150MHz	SOT-23	16ta	-	3a	Rhm
R2p	-	BFR93A	Si-npn	UHF-A-Band, 15V, 30mA, 300mW, B>40, >5GHz	SOT-23	16ta	-	3a	Phi
R2P	-	MMST5086	Si-pnp	AF, 50V, 200mA, B=150..500, >40MHz	SOT-23	16ta	-	3a	Rhm
R2Q	-	MMST5087	Si-pnp	AF, 50V, 200mA, B=250..800, >40MHz	SOT-23	16ta	-	3a	Rhm
R2Q	-	SST7157	Si-pnp	GP, 60V, 200mA	SOT-23	16ta	-	3a	Rhm
R2s	-	BFR93W	Si-npn	UHF-A-Band, 15V, 30mA, 300mW, B>40, >5GHz	SOT-323	16ta	-	3a	Sie
R2T	-	MMST4403	Si-pnp	Sw, 40V, 600mA, 200mW, B=100..300, >200MHz	SC-59	16ta	-	3a	Rhm
R2T	-	SST4403	Si-pnp	Sw, 40V, 600mA, 200mW, B=100..300, >200MHz	SST3	16ta	-	3a	Rhm
R2T	-	UMT4403	Si-pnp	GP, 40V, 600mA, 225mW, B=30..100, 200MHz	SOT-323	16ta	-	3a	Rhm
R2U	-	MMSTA63	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>5000, >125MHz	SC-59	16ta	-	3a	Rhm
R2U	-	SSTA63	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>5000, >125MHz	SOT-23	16ta	-	3a	Rhm
R2V	-	MMSTA64	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>10000, >125MHz	SC-59	16ta	-	3a	Rhm
R2V	-	SSTA64	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>10000, >125MHz	SOT-23	16ta	-	3a	Rhm
R2X	-	MMBT4401	Si-npn	GP, 60V, 600mA, 225mW, B=100..300, 250MHz	SOT-23	16ta	-	3a	Trs
R2X	-	MMST4401	Si-npn	Sw, 60V, 600mA, 200mW, B=100..300, >250MHz	SC-59	16ta	-	3a	Rhm
R2X	-	SST4401	Si-npn	Sw, 60V, 600mA, 200mW, B=100..300, >250MHz	SST3	16ta	-	3a	Rhm
R2X	-	UMT4401	Si-npn	Sw, 60V, 600mA, 200mW, B=100..300, >250MHz	SOT-323	16ta	-	3a	Rhm
R2Z	-	SST4400	Si-npn	AF, 60V, 600mA, B=50..150, >200MHz	SOT-23	16ta	-	3a	Rhm
R3	-	2SC2351-3	Si-npn	Fast-Sw, UHF, 20V, 70mA, 200mW, B=80..160, 4.5Hz	SOT-23	16ta	-	3a	Nec
R3	-	2SC2351-Q	Si-npn	Fast-Sw, UHF, 20V, 70mA, 200mW, B=100..200, 4.5Hz	SOT-23	16ta	-	3a	Nec
R3	-	2SC4225-3	Si-npn	VHF/UHF, 25V, 70mA, 160mW, B=100..200, 4GHz	SOT-323	16ta	-	3a	Nec
R3	-	2SK283-3	n-FET	AF-Amp, 80V, 50mA, 150mW, Idss=1.2..3mA, Up=0.75V	SOT-23	16fa	-	3a	San
R3	-	BZX84C5V6T	Z-diode	5.2..6.0V, Zzt=40Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
R3	-	CZRH3-55C5V6	Z-diode	5.6..6.0V, Zzt=40Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
R3	-	ELM7633LCB	Vdet-IC	3.3V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
R3	-	ELM9733CBB	Vdet-IC	3.3V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
R3	-	NE02133-3	Si-npn	Fast-Sw, UHF, 25V, 70mA, 200mW, B=80..160, 4.5Hz	SOT-23	16ta	-	3a	Cel
R3	-	NE02133-Q	Si-npn	Fast-Sw, UHF, 25V, 70mA, 200mW, B=100..200, 4.5Hz	SOT-23	16ta	-	3a	Cel
R3	-	R3130N29BA3	Vdet-IC	2.9V±1.5%, -Reset PPO, 100ms	SOT-23	16vdc	VD7	3b	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R3	-	SRC1203E	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=22k/22k	SOT-523	16ta	-	3a	Auk
R3	-	SRC1203EF	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=22k/22k	SOT-523F	18ta	-	3a	Auk
R3	-	SRC1203U	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/22k	SOT-323	16ta	-	3a	Auk
R3	-	SRC1203UF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/22k	SOT-323F	18ta	-	3a	Auk
R3	-	TC54VN5302ECB	Vdet-IC	5.3V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
R30	-	CM7R250-30B-T	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R30	-	GS810CTEUE	Vdet-IC	3.08V±1.5%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
R30B	-	ML62302M	LVR-IC	3.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R31	-	CM7R250-31B-T	LVR-IC	LDO, 3.1V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R31A	-	REF3112A	Vref-IC	Precision, LDO, Series, 1.25V, 0.2%, <15ppm/°C	SOT-23	16vj	VR1	3a	Bb
R31B	-	ML62312M	LVR-IC	3.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R31B	-	REF3120A	Vref-IC	Precision, LDO, Series, 2.048V, 0.2%, <15ppm/°C	SOT-23	16vj	VR1	3a	Bb
R31C	-	REF3125A	Vref-IC	Precision, LDO, Series, 2.5V, 0.2%, <15ppm/°C	SOT-23	16vj	VR1	3a	Bb
R31D	-	REF3140A	Vref-IC	Precision, LDO, Series, 4.096V, 0.2%, <15ppm/°C	SOT-23	16vj	VR1	3a	Bb
R31E	-	REF3130A	Vref-IC	Precision, LDO, Series, 3V, 0.2%, <15ppm/°C	SOT-23	16vj	VR1	3a	Bb
R31F	-	REF3133A	Vref-IC	Precision, LDO, Series, 3.3V, 0.2%, <15ppm/°C	SOT-23	16vj	VR1	3a	Bb
R32	-	2SC3583-P	Si-npn	VHF/UHF, LN, 20V, 65mA, 200mW, B=40..80, 9GHz	SOT-23	16ta	-	3a	Nec
R32	-	2SC4227-32	Si-npn	VHF/UHF, 20V, 65mA, 150mW, B=30..60, 7GHz	SOT-323	16ta	-	3a	Nec
R32	-	CM7R250-32B-T	LVR-IC	LDO, 3.2V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R32	-	NE68130-32	Si-npn	VHF/UHF, 20V, 65mA, 150mW, B=30..60, 7GHz	SOT-323	16ta	-	3a	Cel
R32	-	NE68133-P	Si-npn	VHF/UHF, LN, 20V, 65mA, 200mW, B=40..80, 9GHz	SOT-23	16ta	-	3a	Cel
R32B	-	ML62322M	LVR-IC	3.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R33	-	2SC3583-33	Si-npn	VHF/UHF, LN, 20V, 35mA, 200mW, B=50..100, 9GHz	SOT-23	16ta	-	3a	Nec
R33	-	2SC3583-Q	Si-npn	VHF/UHF, LN, 20V, 35mA, 200mW, B=50..100, 9GHz	SOT-23	16ta	-	3a	Nec
R33	-	2SC4227-33	Si-npn	VHF/UHF, 20V, 65mA, 150mW, B=40..80, 7GHz,	SOT-323	16ta	-	3a	Nec
R33	-	CM7R250-33B-T	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R33	-	NE68130-33	Si-npn	VHF/UHF, 20V, 65mA, 150mW, B=40..80, 7GHz,	SOT-323	16ta	-	3a	Cel
R33	-	NE68133-33	Si-npn	VHF/UHF, LN, 20V, 35mA, 200mW, B=50..100, 9GHz	SOT-23	16ta	-	3a	Cel
R33	-	NE68133-Q	Si-npn	VHF/UHF, LN, 20V, 35mA, 200mW, B=50..100, 9GHz	SOT-23	16ta	-	3a	Cel
R33	-	XC61CN5302M	Vdet-IC	5.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
R33	-	XE61CN5345MR	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
R33B	-	ML62332M	LVR-IC	3.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R34	-	2SC3583-34	Si-npn	VHF/UHF, LN, 20V, 35mA, 200mW, B=80..160, 9GHz	SOT-23	16ta	-	3a	Nec
R34	-	2SC3583-R	Si-npn	VHF/UHF, LN, 20V, 35mA, 200mW, B=80..160, 9GHz	SOT-23	16ta	-	3a	Nec
R34	-	2SC4227-34	Si-npn	VHF/UHF, 20V, 65mA, 150mW, B=70..140, 7GHz,	SOT-323	16ta	-	3a	Nec
R34	-	CM7R250-34B-T	LVR-IC	LDO, 3.4V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R34	-	NE68130-34	Si-npn	VHF/UHF, 20V, 65mA, 150mW, B=70..140, 7GHz,	SOT-323	16ta	-	3a	Cel
R34	-	NE68133-34	Si-npn	VHF/UHF, LN, 20V, 35mA, 200mW, B=80..160, 9GHz	SOT-23	16ta	-	3a	Cel
R34	-	NE68133-R	Si-npn	VHF/UHF, LN, 20V, 35mA, 200mW, B=80..160, 9GHz	SOT-23	16ta	-	3a	Cel
R34B	-	ML62342M	LVR-IC	3.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R35	-	2SC3583-35	Si-npn	VHF/UHF, LN, 20V, 35mA, 200mW, B=125..250, 9GHz	SOT-23	16ta	-	3a	Nec
R35	-	2SC3583-S	Si-npn	VHF/UHF, LN, 20V, 35mA, 200mW, B=125..250, 9GHz	SOT-23	16ta	-	3a	Nec
R35	-	2SC4227-35	Si-npn	VHF/UHF, 20V, 65mA, 150mW, B=125..250, 7GHz,	SOT-323	16ta	-	3a	Nec
R35	-	CM7R250-35B-T	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R35	-	LN61FN5312M	Vdet-IC	5.3V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
R35	-	NE68130-35	Si-npn	VHF/UHF, 20V, 65mA, 150mW, B=125..250, 7GHz,	SOT-323	16ta	-	3a	Cel
R35	-	NE68133-35	Si-npn	VHF/UHF, LN, 20V, 35mA, 200mW, B=125..250, 9GHz	SOT-23	16ta	-	3a	Cel
R35	-	NE68133-S	Si-npn	VHF/UHF, LN, 20V, 35mA, 200mW, B=125..250, 9GHz	SOT-23	16ta	-	3a	Cel
R35	-	TC51N5302ECB	Vdet-IC	5.3V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
R35	-	XC61FN5312M	Vdet-IC	5.3V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
R35	-	XC61HN5312MR	Vdet-IC	5.3V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
R35B	-	ML62352M	LVR-IC	3.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R36	-	CM7R250-36B-T	LVR-IC	LDO, 3.6V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R36	-	LN61FN5342M	Vdet-IC	5.3V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
R36	-	XC61FN5342M	Vdet-IC	5.3V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
R36	-	XC61HN5342MR	Vdet-IC	5.3V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
R36B	-	ML62362M	LVR-IC	3.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R37	-	CM7R250-37B-T	LVR-IC	LDO, 3.7V±2%, 150mAV	SOT-23	16cg	VR1	3a	Can
R37	-	LN61FN5352M	Vdet-IC	5.3V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
R37	-	XC61FN5352M	Vdet-IC	5.3V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
R37	-	XC61HN5352MR	Vdet-IC	5.3V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
R37B	-	ML62372M	LVR-IC	3.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R38	-	CM7R250-38B-T	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R38B	-	ML62382M	LVR-IC	3.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R39	-	CM7R250-39B-T	LVR-IC	LDO, 3.9V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R39	-	SST1139	Si-npn	VHF/UHF, 30V, 30mA, >850MHz	SOT-23	16ta	-	3a	Rhm
R39B	-	ML62392M	LVR-IC	3.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R3A	-	CM7R250-30A-T	LVR-IC	LDO, 3.05V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R3B	-	CM7R250-31A-T	LVR-IC	LDO, 3.15V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R3B	-	LM4040B30FTA	Vref-IC	μPower, Precision, Shunt, 3.00V±0.2%	SOT-23	16dk	RF1	3a	Zx



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R3B	-	SST8245	Si-npn	VHF/UHF, 30V, 50mA, >600MHz	SOT-23	16ta	-	3a	Rhm
R3C	-	CM7R250-32A-T	LVR-IC	LDO, 3.25V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R3C	-	LM4040C30FTA	Vref-IC	µPower, Precision, Shunt, 3.00V±0.5%	SOT-23	16dk	RF1	3a	Zx
R3D	-	CM7R250-33A-T	LVR-IC	LDO, 3.35V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R3D	-	LM4040D30FTA	Vref-IC	µPower, Precision, Shunt, 3.00V±1%	SOT-23	16dk	RF1	3a	Zx
R3E	-	CM7R250-34A-T	LVR-IC	LDO, 3.45V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R3F	-	CM7R250-35A-T	LVR-IC	LDO, 3.55V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R3G	-	CM7R250-36A-T	LVR-IC	LDO, 3.65V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R3H	-	CM7R250-37A-T	LVR-IC	LDO, 3.75V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R3I	-	CM7R250-38A-T	LVR-IC	LDO, 3.85V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R3J	-	CM7R250-39A-T	LVR-IC	LDO, 3.95V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R4	-	2SK283-4	n-FET	AF-Amp, 80V, 50mA, 150mW, Idss=2.5..6mA, Up=0.75V	SOT-23	16fa	-	3a	San
R4	-	BFR93R	Si-npn	UHF-A-Band, 15V, 30mA, 300mW, B>40, >5GHz	SOT-23	16ta	-	3a	Mot
R4	-	BZX84C6V2T	Z-diode	5.8..6.6V, Zzt=10Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
R4	-	CZRH3-55C6V2	Z-diode	6.2..6.60V, Zzt=10Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
R4	-	ELM7634LCB	Vdet-IC	3.4V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
R4	-	ELM9734CBB	Vdet-IC	3.4V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
R4	-	KA4F3R	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=2k2/47k	SOT-416	16ta	-	3a	Nec
R4	-	R3130N30BA8	Vdet-IC	3V±1.5%, -Reset PPO, 100ms	SOT-23	16vdc	VD7	3b	Ric
R4	-	SP809EK-3-1	Vdet-IC	3.1V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Sip
R4	-	SRC1204E	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=47k/47k	SOT-523	16ta	-	3a	Auk
R4	-	SRC1204EF	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=47k/47k	SOT-523F	18ta	-	3a	Auk
R4	-	SRC1204U	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/47k	SOT-323	16ta	-	3a	Auk
R4	-	SRC1204UF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/47k	SOT-323F	18ta	-	3a	Auk
R4	-	TC54VN5402ECB	Vdet-IC	5.4V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
R40	-	CM7R250-40B-T	LVR-IC	LDO, 4.0V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R40	-	GS810CJEUE	Vdet-IC	4.0V±1.5%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
R40B	-	ML62402M	LVR-IC	4.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R41	-	CM7R250-41B-T	LVR-IC	LDO, 4.1V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R41B	-	ML62412M	LVR-IC	4.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R42	-	2SC4228-42	Si-npn	VHF/UHF, 20V, 35mA, 150mW, B=30..80, 8.5GHz,	SOT-323	16ta	-	3a	Nec
R42	-	CM7R250-42B-T	LVR-IC	LDO, 4.2V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R42B	-	ML62422M	LVR-IC	4.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R43	-	2SC3585-43	Si-npn	VHF/UHF, 20V, 35mA, 200mW, 10GHz, B=50..100	SOT-23	16ta	-	3a	Nec
R43	-	2SC3585-Q	Si-npn	VHF/UHF, 20V, 35mA, 200mW, 10GHz, B=50..100	SOT-23	16ta	-	3a	Nec
R43	-	2SC4228-43	Si-npn	VHF/UHF, 20V, 35mA, 150mW, B=50..100, 8.5GHz,	SOT-323	16ta	-	3a	Nec
R43	-	CM7R250-43B-T	LVR-IC	LDO, 4.3V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R43	-	GS810CMEUE	Vdet-IC	4.38V±1.5%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
R43	-	XC61CN5402M	Vdet-IC	5.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
R43	-	XE61CN5445MR	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
R43B	-	ML62432M	LVR-IC	4.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R44	-	2SC3585-44	Si-npn	VHF/UHF, 20V, 35mA, 200mW, 10GHz, B=80..160	SOT-23	16ta	-	3a	Nec
R44	-	2SC3585-R	Si-npn	VHF/UHF, 20V, 35mA, 200mW, 10GHz, B=80..160	SOT-23	16ta	-	3a	Nec
R44	-	2SC4228-44	Si-npn	VHF/UHF, 20V, 35mA, 150mW, B=80..160, 8.5GHz,	SOT-323	16ta	-	3a	Nec
R44	-	CM7R250-44B-T	LVR-IC	LDO, 4.4V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R44B	-	ML62442M	LVR-IC	4.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R45	-	2SC3585-45	Si-npn	VHF/UHF, 20V, 35mA, 200mW, 10GHz, B=125..250	SOT-23	16ta	-	3a	Nec
R45	-	2SC3585-S	Si-npn	VHF/UHF, 20V, 35mA, 200mW, 10GHz, B=125..250	SOT-23	16ta	-	3a	Nec
R45	-	2SC4228-45	Si-npn	VHF/UHF, 20V, 35mA, 150mW, B=125..250, 8.5GHz,	SOT-323	16ta	-	3a	Nec
R45	-	CM7R250-45B-T	LVR-IC	LDO, 4.5V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R45	-	LN61FN5412M	Vdet-IC	5.4V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
R45	-	TC51N5402ECB	Vdet-IC	5.4V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
R45	-	XC61FN5412M	Vdet-IC	5.4V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
R45	-	XC61HN5412MR	Vdet-IC	5.4V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
R45B	-	ML62452M	LVR-IC	4.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R46	-	CM7R250-46B-T	LVR-IC	LDO, 4.6V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R46	-	GS810CLEUE	Vdet-IC	4.63V±1.5%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3g	Vs
R46	-	LN61FN5442M	Vdet-IC	5.4V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
R46	-	XC61FN5442M	Vdet-IC	5.4V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
R46	-	XC61HN5442MR	Vdet-IC	5.4V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
R46B	-	ML62462M	LVR-IC	4.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R47	-	CM7R250-47B-T	LVR-IC	LDO, 4.7V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R47	-	LN61FN5452M	Vdet-IC	5.4V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
R47	-	XC61FN5452M	Vdet-IC	5.4V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
R47	-	XC61HN5452MR	Vdet-IC	5.4V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
R47B	-	ML62472M	LVR-IC	4.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R48	-	CM7R250-48B-T	LVR-IC	LDO, 4.8V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R48B	-	ML62482M	LVR-IC	4.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R49	-	CM7R250-49B-T	LVR-IC	LDO, 4.9V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R49B	-	ML62492M	LVR-IC	4.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R4A	-	CM7R250-40A-T	LVR-IC	LDO, 4.05V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R4A	-	LM4040AIM3-4.1	Vref-IC	µPower, Precision, Shunt, 4.10V±0.1%	SOT-23	16dk	RF1	3a	Nsc
R4B	-	CM7R250-41A-T	LVR-IC	LDO, 4.15V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R4B	-	LM4040BIM3-4.1	Vref-IC	µPower, Precision, Shunt, 4.10V±0.2%	SOT-23	16dk	RF1	3a	Nsc
R4C	-	CM7R250-42A-T	LVR-IC	LDO, 4.25V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R4C	-	LM4040CIM3-4.1	Vref-IC	µPower, Precision, Shunt, 4.10V±0.5%	SOT-23	16dk	RF1	3a	Nsc
R4D	-	CM7R250-43A-T	LVR-IC	LDO, 4.35V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R4D	-	LM4040DIM3-4.1	Vref-IC	µPower, Precision, Shunt, 4.10V±1%	SOT-23	16dk	RF1	3a	Nsc
R4E	-	CM7R250-44A-T	LVR-IC	LDO, 4.45V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R4F	-	CM7R250-45A-T	LVR-IC	LDO, 4.55V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R4G	-	CM7R250-46A-T	LVR-IC	LDO, 4.65V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R4H	-	CM7R250-47A-T	LVR-IC	LDO, 4.75V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R4I	-	CM7R250-48A-T	LVR-IC	LDO, 4.85V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R4J	-	CM7R250-49A-T	LVR-IC	LDO, 4.95V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R5	-	2SK283-5	n-FET	AF-Amp, 80V, 50mA, 150mW, Idss=5..12mA, Up=0.75V	SOT-23	16fa	-	3a	San
R5	-	BFR93AR	Si-npn	UHF-A-Band, 15V, 30mA, 300mW, B>40, >5GHz	SOT-23	16te	-	3a	Ste
R5	-	BZX84C6V8T	Z-diode	6.4..7.2V, Zzt=15Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
R5	-	CZRH3-55C6V8	Z-diode	6.8..7.20V, Zzt=15Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
R5	-	ELM7635LCB	Vdet-IC	3.5V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
R5	-	ELM9735CBB	Vdet-IC	3.5V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
R5	-	R3130N46BA5	Vdet-IC	4.6V±1.5%, -Reset PPO, 100ms	SOT-23	16vdc	VD7	3b	Ric
R5	-	SRC1205E	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=22k/47k	SOT-523	16ta	-	3a	Auk
R5	-	SRC1205EF	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=22k/47k	SOT-523F	18ta	-	3a	Auk
R5	-	SRC1205U	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/47k	SOT-323	16ta	-	3a	Auk
R5	-	SRC1205UF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/47k	SOT-323F	18ta	-	3a	Auk
R5	-	TC54VN5502ECB	Vdet-IC	5.5V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
R50	-	CM7R250-50B-T	LVR-IC	LDO, 5.0V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R50B	-	ML62502M	LVR-IC	5.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R51	-	CM7R250-51B-T	LVR-IC	LDO, 5.1V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R51	-	KSR2101	Si-pnp-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=4k7/4k7	SOT-23	16ta	-	3a	Sam
R51B	-	ML62512M	LVR-IC	5.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R52	-	CM7R250-52B-T	LVR-IC	LDO, 5.2V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R52	-	KSR2102	Si-pnp-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	Sam
R52B	-	ML62522M	LVR-IC	5.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R53	-	CM7R250-53B-T	LVR-IC	LDO, 5.3V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R53	-	KSR2103	Si-pnp-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=22k/22k	SOT-23	16ta	-	3a	Sam
R53	-	XC61CN5502M	Vdet-IC	5.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
R53	-	XE61CN5545MR	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
R53B	-	ML62532M	LVR-IC	5.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R54	-	CM7R250-54B-T	LVR-IC	LDO, 5.4V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R54	-	KSR2104	Si-pnp-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=47k/47k	SOT-23	16ta	-	3a	Sam
R54B	-	ML62542M	LVR-IC	5.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R55	-	CM7R250-55B-T	LVR-IC	LDO, 5.5V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R55	-	KSR2105	Si-pnp-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=10k/47k	SOT-23	16ta	-	3a	Sam
R55	-	LN61FN5512M	Vdet-IC	5.5V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
R55	-	TC51N5502ECB	Vdet-IC	5.5V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
R55	-	XC61FN5512M	Vdet-IC	5.5V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
R55	-	XC61HN5512MR	Vdet-IC	5.5V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
R55B	-	ML62552M	LVR-IC	5.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R56	-	CM7R250-56B-T	LVR-IC	LDO, 5.6V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R56	-	KSR2106	Si-pnp-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=22k/47k	SOT-23	16ta	-	3a	Sam
R56	-	LN61FN5542M	Vdet-IC	5.5V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
R56	-	XC61FN5542M	Vdet-IC	5.5V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
R56	-	XC61HN5542MR	Vdet-IC	5.5V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
R56B	-	ML62562M	LVR-IC	5.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R57	-	CM7R250-57B-T	LVR-IC	LDO, 5.7V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R57	-	KSR2107	Si-pnp-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=22k/47k	SOT-23	16ta	-	3a	Sam
R57	-	LN61FN5552M	Vdet-IC	5.5V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
R57	-	XC61FN5552M	Vdet-IC	5.5V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
R57	-	XC61HN5552MR	Vdet-IC	5.5V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
R57B	-	ML62572M	LVR-IC	5.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R58	-	CM7R250-58B-T	LVR-IC	LDO, 5.8V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R58	-	KSR2108	Si-pnp-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=47k/22k	SOT-23	16ta	-	3a	Sam
R58B	-	ML62582M	LVR-IC	5.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R59	-	CM7R250-59B-T	LVR-IC	LDO, 5.9V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R59	-	KSR2109	Si-pnp-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1=4k7	SOT-23	16ta	-	3a	Sam
R59B	-	ML62592M	LVR-IC	5.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R5A	-	CM7R250-50A-T	LVR-IC	LDO, 5.05V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R5A	-	LM4040AIM3-5.0	Vref-IC	µPower, Precision, Shunt, 5.00V±0.1%	SOT-23	16dk	RF1	3a	Nsc
R5B	-	CM7R250-51A-T	LVR-IC	LDO, 5.15V±2%, 150mA	SOT-23	16cg	VR1	3a	Can



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R5B	-	LM4040B50FTA	Vref-IC	µPower, Precision, Shunt, 5.00V±0.2%	SOT-23	16dk	RF1	3a	Zx
R5B	-	LM4040BIM3-5.0	Vref-IC	µPower, Precision, Shunt, 5.00V±0.2%	SOT-23	16dk	RF1	3a	Nsc
R5C	-	CM7R250-52A-T	LVR-IC	LDO, 5.25V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R5C	-	LM4040C50FTA	Vref-IC	µPower, Precision, Shunt, 5.00V±0.5%	SOT-23	16dk	RF1	3a	Zx
R5C	-	LM4040CIM3-5.0	Vref-IC	µPower, Precision, Shunt, 5.00V±0.5%	SOT-23	16dk	RF1	3a	Nsc
R5D	-	CM7R250-53A-T	LVR-IC	LDO, 5.35V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R5D	-	LM4040D50FTA	Vref-IC	µPower, Precision, Shunt, 5.00V±1%	SOT-23	16dk	RF1	3a	Zx
R5D	-	LM4040DIM3-5.0	Vref-IC	µPower, Precision, Shunt, 5.00V±1%	SOT-23	16dk	RF1	3a	Nsc
R5E	-	CM7R250-54A-T	LVR-IC	LDO, 5.45V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R5F	-	CM7R250-55A-T	LVR-IC	LDO, 5.55V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R5G	-	CM7R250-56A-T	LVR-IC	LDO, 5.65V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R5H	-	CM7R250-57A-T	LVR-IC	LDO, 5.75V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R5I	-	CM7R250-58A-T	LVR-IC	LDO, 5.85V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R5J	-	CM7R250-59A-T	LVR-IC	LDO, 5.95V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R6	-	2SK283-6	n-FET	AF-Amp, 80V, 50mA, 150mW, Idss=10..17mA, Up=0.75V	SOT-23	16fa	-	3a	San
R6	-	BZX84C7V5T	Z-diode	7.0..7.9V, Zzt=15Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
R6	-	CZRH3-55C7V5	Z-diode	7.5..7.90V, Zzt=15Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
R6	-	ELM7636LCB	Vdet-IC	3.6V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
R6	-	ELM9736CBB	Vdet-IC	3.6V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
R6	-	SRC1206E	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=4.7k/47k	SOT-523	16ta	-	3a	Auk
R6	-	SRC1206EF	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=4.7k/47k	SOT-523F	18ta	-	3a	Auk
R6	-	SRC1206U	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/47k	SOT-323	16ta	-	3a	Auk
R6	-	SRC1206UF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/47k	SOT-323F	18ta	-	3a	Auk
R6	-	TC54VN5602ECB	Vdet-IC	5.6V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
R60	-	CM7R250-60B-T	LVR-IC	LDO, 6.0V±2%, 150mA	SOT-23	16cg	VR1	3a	Can
R60	-	KSR2110	Si-pnp-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1=10k	SOT-23	16ta	-	3a	Sam
R60B	-	ML62602M	LVR-IC	6.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
R61	-	KSR2111	Si-pnp-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1=22k	SOT-23	16ta	-	3a	Sam
R62	-	2SC3663	Si-npn	UHF, LN, 15V, 5mA, 50mW, B=50..250, 4GHz	SOT-23	16ta	-	3a	Nec
R62	-	KSR2112	Si-pnp-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1=47k	SOT-23	16ta	-	3a	Sam
R63	-	KSR2113	Si-pnp-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=2k2/47k	SOT-23	16ta	-	3a	Sam
R63	-	XC61CN5602M	Vdet-IC	5.6V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
R63	-	XE61CN5645MR	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
R64	-	KSR2114	Si-pnp-Digi	Sw, 50V, 100mA, 20mW, 250MHz, R1/R2=4k7/47k	SOT-23	16ta	-	3a	Sam
R65	-	LN61FN5612M	Vdet-IC	5.6V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
R65	-	SSTA65	Si-npn-Darl	AF, 30V, 300mA, B>50000, >100MHz	SOT-23	16ta	-	3a	Rhm
R65	-	TC51N5602ECB	Vdet-IC	5.6V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
R65	-	XC61FN5612M	Vdet-IC	5.6V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
R65	-	XC61HN5612MR	Vdet-IC	5.6V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
R66	-	LN61FN5642M	Vdet-IC	5.6V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
R66	-	XC61FN5642M	Vdet-IC	5.6V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
R66	-	XC61HN5642MR	Vdet-IC	5.6V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
R67	-	LN61FN5652M	Vdet-IC	5.6V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
R67	-	XC61FN5652M	Vdet-IC	5.6V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
R67	-	XC61HN5652MR	Vdet-IC	5.6V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
R6A	-	2SC4187-A	Si-npn	UHF, 15V, 5mA, 150mW, B=50..100, 4GHz	SOT-323	16ta	-	3a	Nec
R6B	-	2SC4187-B	Si-npn	UHF, 15V, 5mA, 150mW, B=80..160, 4GHz	SOT-323	16ta	-	3a	Nec
R6C	-	2SC4187-C	Si-npn	UHF, 15V, 5mA, 150mW, B=125..250, 4GHz	SOT-323	16ta	-	3a	Nec
R6D	-	LM4040DIM3-6.0	Vref-IC	µPower, Precision, Shunt, 6.00V±1%	SOT-23	16dk	RF1	3a	Nsc
R7	-	BZX84C8V2T	Z-diode	7.7..8.7V, Zzt=15Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
R7	-	CZRH3-55C8v2	Z-diode	8.2..8.70V, Zzt=15Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
R7	-	ELM7637LCB	Vdet-IC	3.7V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
R7	-	ELM9737CBB	Vdet-IC	3.7V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
R7	-	KN4F3R	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1/R2=2k2/47k	SOT-416	16ta	-	3a	Nec
R7	-	SRC1207E	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10/47k	SOT-523	16ta	-	3a	Auk
R7	-	SRC1207EF	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=10/47k	SOT-523F	18ta	-	3a	Auk
R7	-	SRC1207U	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10/47k	SOT-323	16ta	-	3a	Auk
R7	-	SRC1207UF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10/47k	SOT-323F	18ta	-	3a	Auk
R7	-	TC54VN5702ECB	Vdet-IC	5.7V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
R73	-	XC61CN5702M	Vdet-IC	5.7V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
R73	-	XE61CN5745MR	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
R75	-	LN61FN5712M	Vdet-IC	5.7V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
R75	-	TC51N5702ECB	Vdet-IC	5.7V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
R75	-	XC61FN5712M	Vdet-IC	5.7V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
R75	-	XC61HN5712MR	Vdet-IC	5.7V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
R76	-	LN61FN5742M	Vdet-IC	5.7V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
R76	-	XC61FN5742M	Vdet-IC	5.7V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
R76	-	XC61HN5742MR	Vdet-IC	5.7V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
R77	-	LN61FN5752M	Vdet-IC	5.7V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
R77	-	XC61FN5752M	Vdet-IC	5.7V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R77	-	XC61HN5752MR	Vdet-IC	5.7V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
R7p	-	BFR106	Si-npn	VHF/UHF-A-Band, 20V, 100mA, 500mW, B=80, 5GHz	SOT-23	16ta	-	3a	Phi
R7s	-	BFR106	Si-npn	VHF/UHF-A-Band, 20V, 100mA, 500mW, B=80, 5GHz	SOT-23	16ta	-	3c	Inf
R8	-	AP8822C-08GA	Vdet-IC	0.8V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
R8	-	AP8822C-08GT	Vdet-IC	0.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
R8	-	AP8822C-08PA	Vdet-IC	0.8V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
R8	-	AP8822C-08PT	Vdet-IC	0.8V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
R8	-	BZX84C6V2	Z-diode	5.8..6.6V, Zzt=10Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
R8	-	BZX84C9V1T	Z-diode	8.5..9.6V, Zzt=15Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
R8	-	CZRH3-55C9V1	Z-diode	9.1..9.60V, Zzt=15Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
R8	-	ELM7638LCB	Vdet-IC	3.8V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
R8	-	ELM9738CBB	Vdet-IC	3.8V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
R8	-	TC54VN5802ECB	Vdet-IC	5.8V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
R83	-	XC61CN5802M	Vdet-IC	5.8V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
R83	-	XE61CN5845MR	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
R85	-	LN61FN5812M	Vdet-IC	5.8V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
R85	-	TC51N5802ECB	Vdet-IC	5.8V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
R85	-	XC61FN5812M	Vdet-IC	5.8V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
R85	-	XC61HN5812MR	Vdet-IC	5.8V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
R86	-	LN61FN5842M	Vdet-IC	5.8V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
R86	-	XC61FN5842M	Vdet-IC	5.8V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
R86	-	XC61HN5842MR	Vdet-IC	5.8V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
R87	-	LN61FN5852M	Vdet-IC	5.8V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
R87	-	XC61FN5852M	Vdet-IC	5.8V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
R87	-	XC61HN5852MR	Vdet-IC	5.8V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
R8A	-	LM4040AIM3-8.2	Vref-IC	µPower, Precision, Shunt, 8.192V±0.1%	SOT-23	16dk	RF1	3a	Nsc
R8B	-	LM4040BIM3-8.2	Vref-IC	µPower, Precision, Shunt, 8.192V±0.2%	SOT-23	16dk	RF1	3a	Nsc
R8C	-	LM4040CIM3-8.2	Vref-IC	µPower, Precision, Shunt, 8.192V±0.5%	SOT-23	16dk	RF1	3a	Nsc
R8D	-	LM4040DIM3-8.2	Vref-IC	µPower, Precision, Shunt, 8.192V±1%	SOT-23	16dk	RF1	3a	Nsc
R9	-	1SS392	Si-diode	Dual, Schottky, 40V, 100mA	SC-59	16dg	-	3a	Tos
R9	-	1SS393	Si-diode	Dual, Schottky, 40V, 100mA	SOT-323	16dg	-	3a	Tos
R9	-	AP8822C-09GA	Vdet-IC	0.9V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
R9	-	AP8822C-09GT	Vdet-IC	0.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
R9	-	AP8822C-09PA	Vdet-IC	0.9V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
R9	-	AP8822C-09PT	Vdet-IC	0.9V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
R9	-	BZX84C10T	Z-diode	9.4..10.6V, Zzt=20Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
R9	-	BZX84C30	Z-diode	28..32V, Zzt=80Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
R9	-	CZRH3-55C10	Z-diode	10.0..10.60V, Zzt=20Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
R9	-	ELM7639LCB	Vdet-IC	3.9V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
R9	-	ELM9739CBB	Vdet-IC	3.9V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
R9	-	TC54VN5902ECB	Vdet-IC	5.9V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
R93	-	XC61CN5902M	Vdet-IC	5.9V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
R93	-	XE61CN5945MR	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
R95	-	LN61FN5912M	Vdet-IC	5.9V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
R95	-	TC51N5902ECB	Vdet-IC	5.9V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
R95	-	XC61FN5912M	Vdet-IC	5.9V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
R95	-	XC61HN5912MR	Vdet-IC	5.9V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
R96	-	LN61FN5942M	Vdet-IC	5.9V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
R96	-	XC61FN5942M	Vdet-IC	5.9V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
R96	-	XC61HN5942MR	Vdet-IC	5.9V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
R97	-	LN61FN5952M	Vdet-IC	5.9V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
R97	-	SSTTI97	Si-npn	AF, 60V, 200mA, B=250..700	SOT-23	16ta	-	3a	Rhm
R97	-	XC61FN5952M	Vdet-IC	5.9V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
R97	-	XC61HN5952MR	Vdet-IC	5.9V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
RA	-	2SC4097PT-R	Si-npn	Sw, 40V, 500mA, 200mW, B=180..390, 250MHz	SOT-323	16ta	-	3a	Chm
RA	-	AP7333-10SR	LVR-IC	LDO, 1.0V±2%, 300mA	SOT-23	16cg	VR1	3ba	Di
RA	-	ASM1810R-5	Vdet-IC	4.62V±2%, -Reset PPO	SOT-23	16vda	VD6	3a	Ali
RA	-	BFQ81	Si-npn	UHF-A, LN, 25V, 0.03A, 4.2GHz	SOT-23	16ta	-	3a	Sil
RA	-	RN2321A	Si-pnp-Digi	Mute, 15V, 500mA, 300mW, R1/R2=1k/1k	SOT-323	16ta	-	3a	Tos
RA	-	RN2421	Si-pnp-Digi	Mute, 50V, 800mA, 200mW, R1/R2=1k/1k	SC-59	16ta	-	3a	Tos
RA	-	SRC1210E	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=4.7k	SOT-523	16ta	-	3a	Auk
RA	-	SRC1210EF	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=4.7k	SOT-523F	18ta	-	3a	Auk
RA	-	SRC1210U	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=4.7k	SOT-323	16ta	-	3a	Auk
RA	-	SRC1210UF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=4.7k	SOT-323F	18ta	-	3a	Auk
RA	-	TC1279-5ENB	Vdet-IC	4.62V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Mcc
RA-	-	BZB84-B36	Z-diode	Dual, 36V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RA1	-	SRA2201S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3a	Auk
RA1	-	SRA2201SF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/4.7k	SOT-23F	18ta	-	3a	Auk
RA2	-	SRA2202S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	Auk
RA2	-	SRA2202SF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-23F	18ta	-	3a	Auk



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RA23P	-	PCS809PIURF	Vdet-IC	2.3V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Pcr
RA26P	-	PCS809RIURF	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Pcr
RA29P	-	PCS809SIURF	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Pcr
RA3	-	SRA2203S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/22k	SOT-23	16ta	-	3a	Auk
RA3	-	SRA2203SF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/22k	SOT-23F	18ta	-	3a	Auk
RA31P	-	PCS809TIURF	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Pcr
RA4	-	BAV70	Si-diode	Dual, Sw, 75V, 215mA, Vf<1.25V, <4ns	SOT-23	16dg	-	3a	Rhm
RA4	-	SRA2204S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/47k	SOT-23	16ta	-	3a	Auk
RA4	-	SRA2204SF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/47k	SOT-23F	18ta	-	3a	Auk
RA40P	-	PCS809JIURF	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Pcr
RA44P	-	PCS809MIURF	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Pcr
RA46P	-	PCS809LIURF	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Pcr
RA5	-	SRA2205S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/47k	SOT-23	16ta	-	3a	Auk
RA5	-	SRA2205SF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/47k	SOT-23F	18ta	-	3a	Auk
RA6	-	SRA2206S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/47k	SOT-23	16ta	-	3a	Auk
RA6	-	SRA2206SF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/47k	SOT-23F	18ta	-	3a	Auk
RA7	-	SRA2207S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10/47k	SOT-23	16ta	-	3a	Auk
RA7	-	SRA2207SF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10/47k	SOT-23F	18ta	-	3a	Auk
RAA	-	SRA2210S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=4.7k	SOT-23	16ta	-	3a	Auk
RAA	-	SRA2210SF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=4.7k	SOT-23F	18ta	-	3a	Auk
RAB	-	MMBD4448	Si-diode	Sw, Fast, 80V, 500mA, Vf<1V(100mA), <4ns	SOT-23	16dc	-	3g	Vs
RAB	-	SRA2212S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=100k	SOT-23	16ta	-	3a	Auk
RAB	-	SRA2212SF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=100k	SOT-23F	18ta	-	3a	Auk
RAC	-	LM4041CIM3-ADJ	Vref-IC	µPower, Precision, Shunt, Adj. 1.24..10V±0.5%	SOT-23	16du	RF2	3a	Nsc
RAC	-	SRA2219S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/10k	SOT-23	16ta	-	3a	Auk
RAC	-	SRA2219SF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/10k	SOT-23F	18ta	-	3a	Auk
RAD	-	LM4041DIM3-ADJ	Vref-IC	µPower, Precision, Shunt, Adj. 1.24..10V±1%	SOT-23	16du	RF2	3d	Nsc
RAD	-	SRA2211S	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	SOT-23	16ta	-	3a	Auk
RAD	-	SRA2211SF	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	SOT-23F	18ta	-	3a	Auk
RAF	-	SSTA29	Si-npn-Darl	AF, 100V, 500mA, B>10000, >125MHz	SOT-23	16ta	-	3a	Rhm
RAO	-	2SC3718-O	Si-npn	VHF, RF-Mix, 30V, 50mA, 150mW, 500MHz, B=70..140	SC-59	16ta	-	3a	Tos
RAp	-	BZB84-B36	Z-diode	Dual, 36V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RAs	-	BFQ81	Si-npn	UHF-A, LN, 25V, 0.03A, 4.2GHz	SOT-23	16ta	-	3a	Sie
RAt	-	BZB84-B36	Z-diode	Dual, 36V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
RAT	-	MMSTA28	Si-npn-Darl	GP, 80V, 500mA, 500mW, B>10000, >100MHz	SC-59	16ta	-	3a	Rhm
RAT	-	SSTA28	Si-npn-Darl	GP, 80V, 500mA, 500mW, B>10000, >100MHz	SOT-23	16ta	-	3a	Rhm
RAW	-	BZB84-B36	Z-diode	Dual, 36V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
RAY	-	2SC3718-Y	Si-npn	VHF, RF-Mix, 30V, 50mA, 150mW, 500MHz, B=130..240	SC-59	16ta	-	3a	Tos
RB	-	2SA1577PT-R	Si-pnp	AF, Sw, 32V, 500mA, B=180..390, 200MHz	SOT-323	16ta	-	3a	Chm
RB	-	2SC2618-B	Si-npn	GP, AF, 35V, 500mA, 150mW, B=60..120	SOT-23	16ta	-	3a	Ren
RB	-	AP7333-12SR	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3ba	Di
RB	-	ASM1810R-10	Vdet-IC	4.37V±2%, -Reset PPO	SOT-23	16vda	VD6	3a	Ali
RB	-	BZX84C2V4T	Z-diode	2.2..2.6V, Zzt=100Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
RB	-	CH3906WPT	Si-pnp	AF, Sw, 40V, 200mA, B=100..300, 250MHz	SOT-323	16ta	-	3a	Chm
RB	-	CZRH3-55C2V4	Z-diode	2.4..2.60V, Zzt=100Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
RB	-	RN2322A	Si-pnp-Digi	Mute, 15V, 500mA, 300mW, R1/R2=2k2/2k2	SOT-323	16ta	-	3a	Tos
RB	-	RN2422	Si-pnp-Digi	Mute, 50V, 800mA, 200mW, R1/R2=2k2/2k2	SC-59	16ta	-	3a	Tos
RB	-	SRC1212E	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=100k	SOT-523	16ta	-	3a	Auk
RB	-	SRC1212EF	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=100k	SOT-523F	18ta	-	3a	Auk
RB	-	SRC1212U	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=100k	SOT-323	16ta	-	3a	Auk
RB	-	SRC1212UF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=100k	SOT-323F	18ta	-	3a	Auk
RB	-	TC1279-10ENB	Vdet-IC	4.37V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Mcc
RB-	-	BZB84-B39	Z-diode	Dual, 39V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RB23P	-	PCS809NPIURF	Vdet-IC	2.3V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Pcr
RB26P	-	PCS809NRIURF	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Pcr
RB29P	-	PCS809NSIURF	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Pcr
RB31P	-	PCS809NTIURF	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Pcr
RB40P	-	PCS809NJIURF	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Pcr
RB44P	-	PCS809NMIURF	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Pcr
RB46P	-	PCS809NLIURF	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Pcr
RBG	-	2SK711-GR	n-FET	GP, 20V, 10mA, 300mW, Idss=6..12mA	SOT-23	16fa	-	3a	Tos
RBL	-	2SK711-BL	n-FET	GP, 20V, 10mA, 300mW, Idss=10..20mA	SOT-23	16fa	-	3a	Tos
RBp	-	BZB84-B39	Z-diode	Dual, 39V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RBQ	-	SST7208	Si-npn	GP, 60V, 100mA, 180MHz	SOT-23	16ta	-	3a	Rhm
RBR	-	SST6838	Si-npn	GP, Hi-beta, 50V, 0.2A, 200mW, 180MHz, B=100..1000	SST	18ta	-	3a	Rhm
RBs	-	BF771	Si-npn	SATV/VTR-Tuner, 20V, 80mA, 8GHz	SOT-23	16ta	-	3a	Sie
RBs	-	BF771W	Si-npn	SATV/VTR-Tuner, 20V, 80mA, 8GHz	SOT-323	16ta	-	3a	Sie
RBt	-	BZB84-B39	Z-diode	Dual, 39V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
RBV	-	2SK711-V	n-FET	GP, 20V, 10mA, 300mW, Idss=16..32mA	SOT-23	16fa	-	3a	Tos
RBW	-	BZB84-B39	Z-diode	Dual, 39V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RC	-	2SB1197KPT-R	Si-pnp	AF, Sw, 32V, 800mA, B=180..390, 200MHz	SOT-23	16ta	-	3a	Chm
RC	-	2SC2618-C	Si-npn	GP, AF, 35V, 500mA, 150mW, B=100..200	SOT-23	16ta	-	3a	Ren
RC	-	AP7333-15SR	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3ba	Di
RC	-	ASM1810R-15	Vdet-IC	4.12V±2%, -Reset PPO	SOT-23	16vda	VD6	3a	Ali
RC	-	BFR193T	Si-npn	UHF, 20V, 80mA, 400mW, 8GHz	SOT-416	16ta	-	3a	Sil
RC	-	BZX84C2V7T	Z-diode	2.5..2.9V, Zzt=100Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
RC	-	CZRH3-55C2V7	Z-diode	2.7..2.90V, Zzt=100Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
RC	-	RN2323A	Si-pnp-Digi	Mute, 15V, 500mA, 300mW, R1/R2=4k7/4k7	SOT-323	16ta	-	3a	Tos
RC	-	RN2423	Si-pnp-Digi	Mute, 50V, 800mA, 200mW, R1/R2=4.7k/4.7k	SC-59	16ta	-	3a	Tos
RC	-	SRC1219E	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=4.7k/10k	SOT-523	16ta	-	3a	Auk
RC	-	SRC1219EF	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=4.7k/10k	SOT-523F	18ta	-	3a	Auk
RC	-	SRC1219U	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/10k	SOT-323	16ta	-	3a	Auk
RC	-	SRC1219UF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/10k	SOT-323F	18ta	-	3a	Auk
RC	-	TC1279-15ENB	Vdet-IC	4.12V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Mcc
RC-	-	BZB84-B43	Z-diode	Dual, 43V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RC1	-	SRC1201S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3a	Auk
RC1	-	SRC1201SF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/4.7k	SOT-23F	18ta	-	3a	Auk
RC2	-	SRC1202S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	Auk
RC2	-	SRC1202SF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10k/10k	SOT-23F	18ta	-	3a	Auk
RC3	-	SRC1203S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/22k	SOT-23	16ta	-	3a	Auk
RC3	-	SRC1203SF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/22k	SOT-23F	18ta	-	3a	Auk
RC4	-	SRC1204S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/47k	SOT-23	16ta	-	3a	Auk
RC4	-	SRC1204SF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/47k	SOT-23F	18ta	-	3a	Auk
RC5	-	SRC1205S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/47k	SOT-23	16ta	-	3a	Auk
RC5	-	SRC1205SF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=22k/47k	SOT-23F	18ta	-	3a	Auk
RC6	-	SRC1206S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/47k	SOT-23	16ta	-	3a	Auk
RC6	-	SRC1206SF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/47k	SOT-23F	18ta	-	3a	Auk
RC7	-	SRC1207S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10/47k	SOT-23	16ta	-	3a	Auk
RC7	-	SRC1207SF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=10/47k	SOT-23F	18ta	-	3a	Auk
RCA	-	LM4050AIM3-2.5	Vref-IC	Precision, Shunt, 2.50V±0.1%	SOT-23	16dk	RF1	3a	Nsc
RCA	-	SRC1210S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=4.7k	SOT-23	16ta	-	3a	Auk
RCA	-	SRC1210SF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=4.7k	SOT-23F	18ta	-	3a	Auk
RCB	-	LM4050BIM3-2.5	Vref-IC	Precision, Shunt, 2.50V±0.2%	SOT-23	16dk	RF1	3a	Nsc
RCB	-	SRC1212S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=100k	SOT-23	16ta	-	3a	Auk
RCB	-	SRC1212SF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=100k	SOT-23F	18ta	-	3a	Auk
RCC	-	LM4050CIM3-2.5	Vref-IC	Precision, Shunt, 2.50V±0.5%	SOT-23	16dk	RF1	3a	Nsc
RCC	-	SRC1219S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/10k	SOT-23	16ta	-	3a	Auk
RCC	-	SRC1219SF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/10k	SOT-23F	18ta	-	3a	Auk
RCD	-	SRC1211S	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	SOT-23	16ta	-	3a	Auk
RCD	-	SRC1211SF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	SOT-23F	18ta	-	3a	Auk
RCp	-	BZB84-B43	Z-diode	Dual, 43V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RCs	-	BFR193	Si-npn	UHF, 20V, 80mA, 400mW, 8GHz	SOT-23	16ta	-	3a	Sie
RCs	-	BFR193T	Si-npn	UHF, 20V, 80mA, 400mW, 8GHz	SOT-416	16ta	-	3a	Sie
RCs	-	BFR193W	Si-npn	UHF, 20V, 80mA, 400mW, 8GHz	SOT-323	16ta	-	3a	Sie
RCt	-	BZB84-B43	Z-diode	Dual, 43V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
RCW	-	BZB84-B43	Z-diode	Dual, 43V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
RD	-	2SA1037WPT	Si-pnp	AF, 60V, 150mA, 200mW, B=120..560, 140MHz	SOT-323	16ta	-	3a	Chm
RD	-	2SC2618-D	Si-npn	GP, AF, 35V, 500mA, 150mW, B=120..240	SOT-23	16ta	-	3a	Ren
RD	-	AP7333-18SR	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3ba	Di
RD	-	BZX84C3V0T	Z-diode	2.8..3.2V, Zzt=95Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
RD	-	CZRH3-55C3V0	Z-diode	3.0..3.20V, Zzt=95Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
RD	-	RN2324A	Si-pnp-Digi	Mute, 15V, 500mA, 300mW, R1/R2=10k/10k	SOT-323	16ta	-	3a	Tos
RD	-	RN2424	Si-pnp-Digi	Mute, 50V, 800mA, 200mW, R1/R2=10k/10k	SC-59	16ta	-	3a	Tos
RD	-	SRC1211E	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=10k	SOT-523	16ta	-	3a	Auk
RD	-	SRC1211EF	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 200MHz, R1=10k	SOT-523F	18ta	-	3a	Auk
RD	-	SRC1211U	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	SOT-323	16ta	-	3a	Auk
RD	-	SRC1211UF	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=10k	SOT-323F	18ta	-	3a	Auk
RD-	-	BZB84-B47	Z-diode	Dual, 47V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RD23P	-	PCS810PIURF	Vdet-IC	2.3V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Pcr
RD26P	-	PCS810RIURF	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Pcr
RD29P	-	PCS810SIURF	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Pcr
RD31P	-	PCS810TIURF	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Pcr
RD40P	-	PCS810JIURF	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Pcr
RD44P	-	PCS810MIURF	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Pcr
RD46P	-	PCS810LIURF	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Pcr
RDA	-	LM4050AIM3-4.1	Vref-IC	Precision, Shunt, 4.10V±0.1%	SOT-23	16dk	RF1	3a	Nsc
RDB	-	LM4050BIM3-4.1	Vref-IC	Precision, Shunt, 4.10V±0.2%	SOT-23	16dk	RF1	3a	Nsc
RDC	-	LM4050CIM3-4.1	Vref-IC	Precision, Shunt, 4.10V±0.5%	SOT-23	16dk	RF1	3a	Nsc
RDp	-	BZB84-B47	Z-diode	Dual, 47V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RDs	-	BFR180	Si-npn	VHF.UHF, 10V, 4mA, 30mW, B=30..200, 6.2GHz	SOT-23	16ta	-	3a	Inf



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RDs	-	BFR180W	Si-npn	VHF/UHF, 10V, 4mA, 30mW, B=30..200, 7GHz	SOT-323	16ta	-	3a	Inf
RDt	-	BZB84-B47	Z-diode	Dual, 47V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
RDW	-	BZB84-B47	Z-diode	Dual, 47V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
RE	-	2SA1514K-E	Si-pnp	GP, 120V, 50mA, 200mW, B=120..270, 140MHz	SOT-346	16ta	-	3a	Rhm
RE	-	2SA1579-E	Si-pnp	GP, 120V, 50mA, 200mW, B=120..270, 140MHz	SOT-323	16ta	-	3a	Rhm
RE	-	2SC2412WPT-Q	Si-npn	Sw, 50V, 150mA, 200mW, B=120..270, 180MHz	SOT-323	16ta	-	3a	Chm
RE	-	AP7333-20SR	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3ba	Di
RE	-	BZX84C3V3T	Z-diode	3.1..3.5V, Zzt=95Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
RE	-	CZRH3-55C3V3	Z-diode	3.3..3.50V, Zzt=95Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
RE	-	RN2325A	Si-pnp-Digi	Mute, 15V, 500mA, 300mW, R1/R2=0k47k/10k	SOT-323	16ta	-	3a	Tos
RE	-	RN2425	Si-pnp-Digi	Mute, 50V, 800mA, 200mW, R1/R2=0k47k/10k	SC-59	16ta	-	3a	Tos
RE-	-	BZB84-B51	Z-diode	Dual, 51V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
REA	-	LM4050AIM3-5.0	Vref-IC	Precision, Shunt, 5.0V±0.1%	SOT-23	16dk	RF1	3a	Nsc
REB	-	LM4050BIM3-5.0	Vref-IC	Precision, Shunt, 5.0V±0.2%	SOT-23	16dk	RF1	3a	Nsc
REC	-	LM4050CIM3-5.0	Vref-IC	Precision, Shunt, 5V±0.5%	SOT-23	16dk	RF1	3a	Nsc
REp	-	BZB84-B51	Z-diode	Dual, 51V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
REt	-	BZB84-B51	Z-diode	Dual, 51V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
REW	-	BZB84-B51	Z-diode	Dual, 51V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
RF	-	2SC2412WPT-R	Si-npn	Sw, 50V, 150mA, 200mW, B=180..390, 180MHz	SOT-323	16ta	-	3a	Chm
RF	-	AP7333-25SR	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3ba	Di
RF	-	BFR181T	Si-npn	RF, 15V, 20mA, 175mW, 8GHz, B=50..140	SOT-23	16ta	-	3a	Vs
RF	-	BFR181TF	Si-npn	RF, 15V, 20mA, 175mW, 8GHz, B=50..140	SOT-490	18ta	-	3a	Vs
RF	-	BZX84C3V6T	Z-diode	3.4..3.8V, Zzt=90Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
RF	-	CZRH3-55C3V6	Z-diode	3.6..3.80V, Zzt=90Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
RF	-	RN2326A	Si-pnp-Digi	Mute, 15V, 500mA, 300mW, R1/R2=1k/10k	SOT-323	16ta	-	3a	Tos
RF	-	RN2426	Si-pnp-Digi	Mute, 50V, 800mA, 200mW, R1/R2=1k/10k	SC-59	16ta	-	3a	Tos
RF-	-	BZB84-B56	Z-diode	Dual, 56V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RFA	-	LM4050AIM3-8.2	Vref-IC	Precision, Shunt, 8.20V±0.1%	SOT-23	16dk	RF1	3a	Nsc
RFB	-	LM4050BIM3-8.2	Vref-IC	Precision, Shunt, 8.20V±0.2%	SOT-23	16dk	RF1	3a	Nsc
RFC	-	LM4050CIM3-8.2	Vref-IC	Precision, Shunt, 8.20V±0.5%	SOT-23	16dk	RF1	3a	Nsc
RFp	-	BZB84-B56	Z-diode	Dual, 56V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RFQ	-	SST6839	Si-pnp	GP, Hi-beta, 50V, 0.2A, 200mW, 140MHz, B=100..1000	SST	18ta	-	3a	Rhm
RFs	-	BFR181	Si-npn	RF, 20V, 20mA, 175mW, 8GHz, B=70..140	SOT-23	16ta	-	3c	Inf
RFs	-	BFR181T	Si-npn	RF, 20V, 20mA, 175mW, 8GHz, B=50..200	SC-75	16ta	-	3c	Inf
RFs	-	BFR181W	Si-npn	RF, 20V, 20mA, 175mW, 8GHz, B=70..140	SOT-323	16ta	-	3c	Inf
RFt	-	BZB84-B56	Z-diode	Dual, 56V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
RFW	-	BZB84-B56	Z-diode	Dual, 56V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
RG	-	2SC2412WPT-S	Si-npn	Sw, 50V, 150mA, 200mW, B=270..560, 180MHz	SOT-323	16ta	-	3a	Chm
RG	-	AP7333-28SR	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3ba	Di
RG	-	BFR182T	Si-npn	RF, 15V, 35mA, 200mW, 7.5GHz, B=70..140	SOT-23	16ta	-	3a	Vs
RG	-	BFR182TF	Si-npn	RF, 15V, 35mA, 200mW, 7.5GHz, B=70..140	SOT-490	18ta	-	3a	Vs
RG	-	BFR183TF	Si-npn	RF, 15V, 65mA, 200mW, 7.5GHz, B=50..150	SOT-490	18ta	-	3a	Vs
RG	-	BZX84C3V9T	Z-diode	3.7..4.1V, Zzt=90Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
RG	-	CZRH3-55C3V9	Z-diode	3.9..4.10V, Zzt=90Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
RG	-	RN2327A	Si-pnp-Digi	Mute, 15V, 500mA, 300mW, R1/R2=2k2/10k	SOT-323	16ta	-	3a	Tos
RG	-	RN2427	Si-pnp-Digi	Mute, 50V, 800mA, 200mW, R1/R2=2.2k/10k	SC-59	16ta	-	3a	Tos
RG-	-	BZB84-B62	Z-diode	Dual, 62V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RGA	-	LM4050AIM3-10	Vref-IC	Precision, Shunt, 10.0V±0.1%	SOT-23	16dk	RF1	3a	Nsc
RGB	-	LM4050BIM3-10	Vref-IC	Precision, Shunt, 10.0V±0.2%	SOT-23	16dk	RF1	3a	Nsc
RGC	-	LM4050CIM3-10	Vref-IC	Precision, Shunt, 10V±0.5%	SOT-23	16dk	RF1	3a	Nsc
RGp	-	BZB84-B62	Z-diode	Dual, 62V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RGs	-	BFR182	Si-npn	RF, 20V, 35mA, 250mW, 8GHz, B=70..140	SOT-23	16ta	-	3c	Inf
RGs	-	BFR182T	Si-npn	RF, 20V, 35mA, 250mW, 8GHz, B=70..140	SC-75	16ta	-	3c	Inf
RGs	-	BFR182W	Si-npn	RF, 20V, 35mA, 250mW, 8GHz, B=70..140	SOT-323	16ta	-	3c	Inf
RGt	-	BZB84-B62	Z-diode	Dual, 62V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
RGW	-	BZB84-B62	Z-diode	Dual, 62V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
RH	-	AP7333-30SR	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3ba	Di
RH	-	BFR183T	Si-npn	RF, 15V, 65mA, 200mW, 7.5GHz, B=50..150	SOT-23	16ta	-	3a	Vs
RH	-	BZX84C4V3T	Z-diode	4.0..4.6V, Zzt=90Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3b	Di
RH	-	CHT846BWPT-Q	Si-npn	AF, Sw, 65V, 100mA, B=110..220, 200MHz	SOT-323	16ta	-	3a	Chm
RH	-	CZRH3-55C4V3	Z-diode	4.3..4.60V, Zzt=90Ω, Izt=5mA, 150mW	SOT-523	16dc	-	3a	Cmc
RH-	-	BZB84-B68	Z-diode	Dual, 68V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RHp	-	BZB84-B68	Z-diode	Dual, 68V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RHs	-	BFR183	Si-npn	RF, 20V, 65mA, 450mW, 8GHz, B=70..140	SOT-23	16ta	-	3c	Inf
RHs	-	BFR183F	Si-npn	RF, 20V, 65mA, 450mW, 8GHz, B=70..140	TSFP-3	18ta	-	3a	Inf
RHs	-	BFR183W	Si-npn	RF, 20V, 35mA, 250mW, 8GHz, B=70..140	SOT-323	16ta	-	3c	Inf
RHt	-	BZB84-B68	Z-diode	Dual, 68V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
RHW	-	BZB84-B68	Z-diode	Dual, 68V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
RI	-	CHT846BWPT-R	Si-npn	AF, Sw, 65V, 100mA, B=200..450, 200MHz	SOT-323	16ta	-	3a	Chm
RJ	-	AP7333-33SR	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3ba	Di

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RJ	-	CAT803JSDI-GT3	Vdet-IC	4.0V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3d	Ons
RJ	-	CAT803JTBI-GT3	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ons
RJ	-	CHT846BWPT-S	Si-npn	AF, Sw, 65V, 100mA, B=420..800, 200MHz	SOT-323	16ta	-	3a	Chm
RJ	-	MCP101T-270I	Vdet-IC	2.7V±75mV, +Reset PPO	SOT-23	16vdb	VD7	3a	Mcc
RJ-	-	BZB84-B75	Z-diode	Dual, 75V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RJA	-	LM4040AIM3-2.0	Vref-IC	µPower, Precision, Shunt, 2.048V±0.1%	SOT-23	16dk	RF1	3a	Nsc
RJB	-	LM4040BIM3-2.0	Vref-IC	µPower, Precision, Shunt, 2.048V±0.2%	SOT-23	16dk	RF1	3a	Nsc
RJC	-	LM4040CIM3-2.0	Vref-IC	µPower, Precision, Shunt, 2.048V±0.5%	SOT-23	16dk	RF1	3a	Nsc
RJD	-	LM4040DIM3-2.0	Vref-IC	µPower, Precision, Shunt, 2.048V±1%	SOT-23	16dk	RF1	3a	Nsc
RJE	-	LM4040EIM3-2.0	Vref-IC	µPower, Precision, Shunt, 2.048V±2%	SOT-23	16dk	RF1	3a	Nsc
RJp	-	BZB84-B75	Z-diode	Dual, 75V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RJt	-	BZB84-B75	Z-diode	Dual, 75V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
RJW	-	BZB84-B75	Z-diode	Dual, 75V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
RK	-	CHT847BWPT-Q	Si-npn	AF, Sw, 45V, 100mA, B=110..220, 200MHz	SOT-323	16ta	-	3a	Chm
RK	-	MCP101T-300I	Vdet-IC	3.0V±75mV, +Reset PPO	SOT-23	16vdb	VD7	3a	Mcc
RKA	-	LM4040AIM3-3.0	Vref-IC	µPower, Precision, Shunt, 3.00V±0.1%	SOT-23	16dk	RF1	3a	Nsc
RKB	-	LM4040BIM3-3.0	Vref-IC	µPower, Precision, Shunt, 3.00V±0.2%	SOT-23	16dk	RF1	3a	Nsc
RKC	-	LM4040CIM3-3.0	Vref-IC	µPower, Precision, Shunt, 3.00V±0.5%	SOT-23	16dk	RF1	3a	Nsc
RKD	-	LM4040DIM3-3.0	Vref-IC	µPower, Precision, Shunt, 3.00V±1%	SOT-23	16dk	RF1	3a	Nsc
RKE	-	LM4040EIM3-3.0	Vref-IC	µPower, Precision, Shunt, 3.00V±2%	SOT-23	16dk	RF1	3a	Nsc
RKM	-	RK7002	n-MOSFET	V-MOS, LogL, 60V, 0.115A, <7.5Ω	SOT-23	16fh	-	3a	Rhm
RKs	-	BFR194	Si-pnp	UHF-A, ..1.5GHz, 20V, 0.1A, 5GHz	SOT-23	16ta	-	3a	Sie
RL	-	2SA1563	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, B>70, R1/R2=10k/47k	CP	16ta	-	3a	San
RL	-	CAT803LSDI-GT3	Vdet-IC	4.63V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3d	Ons
RL	-	CAT803LTBI-GT3	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ons
RL	-	CHT847BWPT-R	Si-npn	AF, Sw, 45V, 100mA, B=200..450, 200MHz	SOT-323	16ta	-	3a	Chm
RL	-	MCP101T-315I	Vdet-IC	3.15V±75mV, +Reset PPO	SOT-23	16vdb	VD7	3a	Mcc
RM	-	CAT803MSDI-GT3	Vdet-IC	4.38V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3d	Ons
RM	-	CAT803MTBI-GT3	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ons
RM	-	CHT847BWPT-S	Si-npn	AF, Sw, 45V, 100mA, B=420..800, 200MHz	SOT-323	16ta	-	3a	Chm
RM	-	MCP101T-450I	Vdet-IC	4.5V±150mV, +Reset PPO	SOT-23	16vdb	VD7	3a	Mcc
RN	-	CHT848BWPT-P	Si-npn	AF, Sw, 30V, 100mA, B=110..220, 300MHz	SOT-323	16ta	-	3a	Chm
RN	-	MCP101T-460I	Vdet-IC	4.6V±150mV, +Reset PPO	SOT-23	16vdb	VD7	3a	Mcc
RO	-	2SC2715-O	Si-npn	VHF Mix/Osc, 35V, 50mA, 150mW, B=40..80, 100..400MHz	SC-59	16ta	-	3a	Tos
RO	-	CHT848BWPT-Q	Si-npn	AF, Sw, 30V, 100mA, B=200..450, 300MHz	SOT-323	16ta	-	3a	Chm
RO	-	MCP101T-475I	Vdet-IC	4.75V±150mV, +Reset PPO	SOT-23	16vdb	VD7	3a	Mcc
RP	-	CHT848BWPT-R	Si-npn	AF, Sw, 30V, 100mA, B=420..800, 300MHz	SOT-323	16ta	-	3a	Chm
RP	-	DDZX33	Z-diode	33V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
RP	-	MCP101T-485I	Vdet-IC	4.85V±150mV, +Reset PPO	SOT-23	16vdb	VD7	3a	Mcc
RP-	-	BZB84-B20	Z-diode	Dual, 20V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RPp	-	BZB84-B20	Z-diode	Dual, 20V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RPt	-	BZB84-B20	Z-diode	Dual, 20V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
RPW	-	BZB84-B20	Z-diode	Dual, 20V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
RQ	-	CHT856BWPT-Q	Si-pnp	AF, Sw, 65V, 100mA, B=125..250, 200MHz	SOT-323	16ta	-	3a	Chm
RQ-	-	BZB84-C20	Z-diode	Dual, 20V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RQp	-	BZB84-C20	Z-diode	Dual, 20V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
RQt	-	BZB84-C20	Z-diode	Dual, 20V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
RQW	-	BZB84-C20	Z-diode	Dual, 20V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
RR	-	2SA1514K-R	Si-pnp	GP, 120V, 50mA, 200mW, B=180..390, 140MHz	SOT-346	16ta	-	3a	Rhm
RR	-	2SA1579-R	Si-pnp	GP, 120V, 50mA, 200mW, B=180..390, 140MHz	SOT-323	16ta	-	3a	Rhm
RR	-	2SC2715-R	Si-npn	VHF Mix/Osc, 35V, 50mA, 150mW, B=70..140, 100..400MHz	SC-59	16ta	-	3a	Tos
RR	-	BFR93P	Si-npn	UHF-A-Band, 15V, 30mA, 300mW, B>40, >5GHz	SOT-23	16ta	-	3a	Sie
RR	-	CAT803RSDI-GT3	Vdet-IC	2.63V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3d	Ons
RR	-	CAT803RTBI-GT3	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ons
RR	-	CAT809RSDI-GT3	Vdet-IC	2.63V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3d	Ons
RR	-	CAT809RTBI-GT3	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
RR	-	CHT856BWPT-R	Si-pnp	AF, Sw, 65V, 100mA, B=220..475, 200MHz	SOT-323	16ta	-	3a	Chm
RR	-	MCP810T-270I	Vdet-IC	2.625V±75mV, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
RRA	-	BC847A	Si-npn	GP, 50V, 100mA, 200mW, B=110..220, 250MHz	SOT-23	16ta	-	3a	Auk
RRA	-	BC847FA	Si-npn	GP, 50V, 100mA, 200mW, B=110..220, 250MHz	SOT-23F	18ta	-	3a	Auk
RRB	-	BC847B	Si-npn	GP, 50V, 100mA, 200mW, B=200..450, 250MHz	SOT-23	16ta	-	3a	Auk
RRB	-	BC847FB	Si-npn	GP, 50V, 100mA, 200mW, B=200..450, 250MHz	SOT-23F	18ta	-	3a	Auk
RRC	-	BC847C	Si-npn	GP, 50V, 100mA, 200mW, B=420..800, 250MHz	SOT-23	16ta	-	3a	Auk
RRC	-	BC847FC	Si-npn	GP, 50V, 100mA, 200mW, B=420..800, 250MHz	SOT-23F	18ta	-	3a	Auk
RS	-	2SA1514K-S	Si-pnp	GP, 120V, 50mA, 200mW, B=270..560, 140MHz	SOT-346	16ta	-	3a	Rhm
RS	-	2SA1579-S	Si-pnp	GP, 120V, 50mA, 200mW, B=270..560, 140MHz	SOT-323	16ta	-	3a	Rhm
RS	-	2SC2480-S	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=1000..1600, 1.3GHz	SC-59	16ta	-	3a	Pan
RS	-	2SC3932-S	Si-npn	HF-Amp, Osc, 30V, 50mA, 150mW, B=800..1400, >800MHz	SOT-323	16ta	-	3a	Pan
RS	-	CAT803SSDI-GT3	Vdet-IC	2.93V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3d	Ons
RS	-	CAT803STBI-GT3	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ons

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RS	-	CAT810RSDI-GT3	Vdet-IC	2.63V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3d	Ons
RS	-	CAT810RTBI-GT3	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ons
RS	-	CHT856BWPT-S	Si-pnp	AF, Sw, 65V, 100mA, B=420..800, 200MHz	SOT-323	16ta	-	3a	Chm
RS	-	MCP810T-300I	Vdet-IC	2.925V±75mV, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
RSR	-	SST5210	Si-npn	AF, 50V, 200mA, B=200..600, >30MHz	SOT-23	16ta	-	3a	Rhm
RT	-	2SC2480-T	Si-npn	VHF/UHF, 30V, 50mA, 150mW, B=800..1400, 1.3GHz	SC-59	16ta	-	3a	Pan
RT	-	2SC3932-T	Si-npn	HF-Amp, Osc, 30V, 50mA, 150mW, B=1000..1600, >800MHz	SOT-323	16ta	-	3a	Pan
RT	-	CAT803TSDI-GT3	Vdet-IC	3.08V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3d	Ons
RT	-	CAT803TTBI-GT3	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ons
RT	-	CHT857BWPT-Q	Si-pnp	AF, Sw, 45V, 100mA, B=125..250, 100MHz	SOT-323	16ta	-	3a	Chm
RT	-	MCP810T-315I	Vdet-IC	3.075V±75mV, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
RT3	-	2SC4400-3	Si-npn	VHF, FP, 40V, 50mA, 150mW, B=60..120, 750MHz	SOT-23	16ta	-	3a	San
RT3	-	2SC4432-3	Si-npn	FM/VHF, 40V, 50mA, 250mW, B=60..120, 750MHz	CP	16ta	-	3a	San
RT4	-	2SC4400-4	Si-npn	VHF, GP, 40V, 50mA, 150mW, B=90..180, 750MHz	SOT-23	16ta	-	3a	San
RT4	-	2SC4432-4	Si-npn	FM/VHF, 40V, 50mA, 250mW, B=90..180, 750MHz	CP	16ta	-	3a	San
RT5	-	2SC4400-5	Si-npn	VHF, GP, 40V, 50mA, 150mW, B=135..270, 750MHz	SOT-23	16ta	-	3a	San
RT5	-	2SC4432-5	Si-npn	FM/VHF, 40V, 50mA, 250mW, B=135..270, 750MHz	CP	16ta	-	3a	San
RU	-	CHT857BWPT-R	Si-pnp	AF, Sw, 45V, 100mA, B=220..475, 100MHz	SOT-323	16ta	-	3a	Chm
RU	-	MCP810T-450I	Vdet-IC	4.375V±150mV, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
RV	-	CHT857BWPT-S	Si-pnp	AF, Sw, 45V, 100mA, B=420..800, 100MHz	SOT-323	16ta	-	3a	Chm
RV	-	MCP810T-460I	Vdet-IC	4.475V±150mV, -+Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
RVZ	-	MMST4126	Si-pnp	GP, 25V, 200mA, 350mW, B=120..360, >250MHz	SC-59	16ta	-	3a	Rhm
RVZ	-	SST4126	Si-pnp	GP, 25V, 200mA, 350mW, B=120..360, >250MHz	SOT-23	16ta	-	3a	Rhm
RW	-	BFR194	Si-pnp	UHF-A, ..1.5GHz, 20V, 0.1A, 5GHz	SOT-23	16ta	-	3a	Sie
RW	-	CHT858BWPT-Q	Si-pnp	AF, Sw, 30V, 100mA, B=125..250, 200MHz	SOT-323	16ta	-	3a	Chm
RW	-	MCP810T-475I	Vdet-IC	4.625V±150mV, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
RX	-	CHT858BWPT-R	Si-pnp	AF, Sw, 30V, 100mA, B=220..475, 200MHz	SOT-323	16ta	-	3a	Chm
RX7	-	SST6426	Si-npn-Darl	AF, 40V, 500mA, B=300..300000	SOT-23	16ta	-	3a	Rhm
RY	-	2SC2715-Y	Si-npn	VHF Mix/Osc, 35V, 50mA, 150mW, B=120..240, 100..400MHz	SC-59	16ta	-	3a	Tos
RY	-	2SC3898	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, B>100, R1=47k	CP	16ta	-	3a	San
RY	-	2SC5541	Si-npn	UHF-S-Band, LN, 9V, 30mA, 100mW, B=90..200, 13GHz	SSFP	18ta	-	3a	San
RY	-	CHT858BWPT-S	Si-pnp	AF, Sw, 30V, 100mA, B=420..800, 200MHz	SOT-323	16ta	-	3a	Chm
RZ	-	CAT803ZSDI-GT3	Vdet-IC	2.32V±1.5%, -Reset ODO	SC-70	16vdc	VD6	3d	Ons
RZ	-	CAT803ZTBI-GT3	Vdet-IC	2.32V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ons
RZ	-	MCP810T-485I	Vdet-IC	4.725V±150mV, +Reset PPO	SOT-23	16vdc	VD7	3b	Mcc
RZC	-	MMST4124	Si-npn	Sw, 30V, 200mA, 330mW, B=120..360, >300MHz	SC-59	16ta	-	3a	Rhm
RZC	-	SST4124	Si-npn	Sw, 30V, 200mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Rhm
RZQ	-	MMST7157	Si-pnp	AF, 60V, 200mA, B>100	SOT-23	16ta	-	3a	Rhm
s	-	AX6903EA	Vdet-IC	2.93V±1.5%, -Reset PPO	SC-70	16vda	VD7	3b	Axl
S	-	SB10-015C	Si-diode	SBR, HF, 15V, 1A, Vf<0.55V(500mA), 30pF, 10ns	CP	16dc	-	3a	San
S	cr	ELM7538NEB	Vdet-IC	3.8V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
S	cs	ELM7538CEB	Vdet-IC	3.8V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
S0	-	ELM7630HCB	Vdet-IC	3.0V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
S0	-	ELM9740CBB	Vdet-IC	4.0V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
S0	-	HSMP-3880	PIN-diode	RF, 100V, 1A, 250mW, Rs<6.5Ω, Cd<0.4pF	SOT-23	16dc	-	3a	Agi
S0	-	R3130N40DA	Vdet-IC	4V±1.5%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Ric
S0	-	SST270	n-FET	AF, LN, 30V, 350mW, Idss=2..15mA, Up<2V	SOT-23	16fj	-	3a	Six
S0	-	TC54VN6002ECB	Vdet-IC	6.0V±2%, -Reset ODO	SC-59	16vdb	VD6	3d	Mcc
S03	-	XC61CN6002M	Vdet-IC	6.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Tor
S03	-	XE61CN6045MR	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23	16vdb	VD6	3h	Tor
S05	-	LN61FN6012M	Vdet-IC	6.0V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Nln
S05	-	TC51N6002ECB	Vdet-IC	6.0V±2%, -Reset ODO, 50...200ms	SC-59	16vdb	VD6	3d	Mcc
S05	-	XC61FN6012M	Vdet-IC	6.0V±2%, +Reset ODO, 200ms	SOT-23	16vdb	VD6	3d	Tor
S05	-	XC61HN6012MR	Vdet-IC	6.0V±2%, -Reset ODO, 50..200ms	SOT-23	16vdc	VD6	3d	Tor
S06	-	LN61FN6042M	Vdet-IC	6.0V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Nln
S06	-	XC61FN6042M	Vdet-IC	6.0V±2%, +Reset ODO, 400ms	SOT-23	16vdb	VD6	3d	Tor
S06	-	XC61HN6042MR	Vdet-IC	6.0V±2%, -Reset ODO, 80..400ms	SOT-23	16vdc	VD6	3d	Tor
S07	-	LN61FN6052M	Vdet-IC	6.0V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Nln
S07	-	XC61FN6052M	Vdet-IC	6.0V±2%, +Reset ODO, 50ms	SOT-23	16vdb	VD6	3d	Tor
S07	-	XC61HN6052MR	Vdet-IC	6.0V±2%, -Reset ODO, 1..50ms	SOT-23	16vdc	VD6	3d	Tor
S09	-	BS809	n-MOSFET	D-MOS, Sw, 400V, 100mA, 310mW, <18Ω(100mA), 10/50ns	SOT-23	16fh	-	3a	Itt
S1	-	BBY31	C-diode	VCO, 30V, 20mA, 1.6/16.5pF(28/1V, 1MHz), <1.2Ω	SOT-23	16dc	-	3a	Phi
S1	-	ELM7631HCB	Vdet-IC	3.1V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
S1	-	ELM9741CBB	Vdet-IC	4.1V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
S1	-	R3130N44DA	Vdet-IC	4.4V±1.5%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Ric
S1	-	SST271	n-FET	AF, LN, 30V, 350mW, Idss=6..50mA, Up<4.5V	SOT-23	16fj	-	3a	Six
S1023L	-	SS10P3CL	Si-diode	Dual SBR, 30V, 5A, Vf<0.52V(5A)	TO-277A	76dg	-	3o	Vs
S102CL	-	SS10P2CL	Si-diode	Dual SBR, 20V, 5A, Vf<0.52V(5A)	TO-277A	76dg	-	3o	Vs
S103	-	SS10P3	Si-diode	SBR, 30V, 10A, Vf<0.56V(10A)	TO-277A	76dh	-	3o	Vs
S103C	-	SS10P3C	Si-diode	Dual SBR, 20V, 5A, Vf<0.53V(5A)	TO-277A	76dg	-	3o	Vs

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S104	-	SS10P4	Si-diode	SBR, 40V, 10A, Vf<0.56V(10A)	TO-277A	76dh	-	3o	Vs
S1043	-	SS10P4C	Si-diode	Dual SBR, 30V, 5A, Vf<0.53V(5A)	TO-277A	76dg	-	3o	Vs
S105	-	SS10P5	Si-diode	SBR, 50V, 10A, Vf<0.59V(10A)	TO-277A	76dh	-	3o	Vs
S106	-	SS10P6	Si-diode	SBR, 60V, 10A, Vf<0.59V(10A)	TO-277A	76dh	-	3o	Vs
S12	-	BBY39	C-diode	Dual, Satellite-TV-Tuning, 30V, 20mA, 1.6..2/16.5pF(28/1V)	SOT-23	16dg	-	3a	Phi
S122	-	SS12P2L	Si-diode	SBR, 20V, 12A, Vf<0.56V(10A)	TO-277A	76dh	-	3o	Vs
S123	-	SS12P3L	Si-diode	SBR, 30V, 12A, Vf<0.56V(10A)	TO-277A	76dh	-	3o	Vs
S124C	-	SS12P4C	Si-diode	Dual, SBR, 40V, 6A, Vf<0.52V(10A)	TO-277A	76dg	-	3o	Vs
S15C	-	FS8844-15GC	LVR-IC	LDO, 1.5V±2.4%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S16	-	ZHCS1006	Si-diode	Schottky, 60V, 300mA, Vf<0.6V(300mA)	SOT-23	16dc	-	3a	Zx
S16C	-	FS8844-16GC	LVR-IC	LDO, 1.6V±2.4%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S17	-	CHT817WPT-S	Si-npn	AF, Sw, 45V, 500mA, B=250..600, 170MHz	SOT-323	16ta	-	3a	Chm
S17C	-	FS8844-17GC	LVR-IC	LDO, 1.7V±2.4%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S18C	-	FS8844-18GC	LVR-IC	LDO, 1.8V±2.4%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S19C	-	FS8844-19GC	LVR-IC	LDO, 1.9V±2.4%, 250mA	SOT-23	16cg	VR1	3ha	Frt
s1A	-	SMBT3904	Si-npn	GP, 60V, 0.1A, 200mW, B= 100..300, >300MHz	SOT-23	16ta	-	3a	Sie
S1A	-	CH3904PT	Si-npn	AF, Sw, 40V, 300mA, B=100..300, 300MHz	SOT-23	16ta	-	3a	Chm
S1A	-	ZTLV431AFTA	Vref-IC	1.24..10V±0.5%, 10mA, <0.25Ω	SOT-23	16du	RF2	3a	Zx
s1B	-	SMBT2222	Si-npn	GP, 60V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Sie
s1D	-	SMBTA42	Si-npn	Vid, 300V, 500mA, 1W, B>40, >50MHz	SOT-23	16ta	-	3a	Sie
s1D	-	SMBTA42M	Si-npn	Vid, 300/300V, 200mA, 350mW, B>25, >50MHz	SOT-23	16ta	-	3a	Sie
s1E	-	SMBTA43	Si-npn	Vid, 200/200V, 200mA, 350mW, B>25, >50MHz	SOT-23	16ta	-	3a	Sie
s1G	-	SMBTA06	Si-npn	GP, 80V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	Sie
s1H	-	SMBTA05	Si-npn	GP, 60V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	Sie
s1K	-	SMBT6428	Si-npn	GP, 60V, 200mA, 330mW, B=250..650, 200MHz	SOT-23	16ta	-	3a	Sie
s1L	-	SMBT6429	Si-npn	GP, 55V, 200mA, 330mW, B=500..1250, 200MHz	SOT-23	16ta	-	3a	Sie
s1M	-	SMBTA13	Si-npn-Darl	GP, 30V, 300mA, 300mW, B>5000, >125MHz	SOT-23	16ta	-	3a	Sie
s1N	-	SMBTA14	Si-npn-Darl	GP, 30V, 300mA, 300mW, B>10000, >125MHz	SOT-23	16ta	-	3a	Sie
s1P	-	MMBT2222A	Si-npn	GP, 75V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3c	Inf
s1P	-	SMBT2222A	Si-npn	GP, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3c	Inf
S1P	-	CHT2222APT	Si-npn	AF, Sw, 40V, 600mA, B=100..300, 300MHz	SOT-23	16ta	-	3a	Chm
S1P	-	CHT4401PT	Si-npn	AF, Sw, 40V, 600mA, B=100..300, 250MHz	SOT-23	16ta	-	3a	Chm
s1V	-	SMBT6427	Si-npn-Darl	AF, 40V, 500mA, 360mW, B=10k..100k, >130MHz	SOT-23	16ta	-	3a	Sie
S2	-	2SA813-2	Si-pnp	GP, 60V, 200mA, 150mW, B=60..120, 200MHz	SOT-23	16ta	-	3a	Nec
S2	-	BBQ31	Si-npn	HF, 30V, 100mA, 330mW, B>20, >600MHz	SOT-23	16ta	-	3a	Zx
S2	-	BFQ31	Si-npn	VHF, 30V, 100mA, 200mW, B>20, >600MHz	SOT-23	16ta	-	3a	Zx
S2	-	BSV35	Si-npn	Fast-Sw, 40V, 500mA, <12/18ns	SOT-323	16te	-	3a	Fer
S2	-	ELM7632HCB	Vdet-IC	3.2V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
S2	-	ELM9742CBB	Vdet-IC	4.2V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
S2	-	KTA2014-2	Si-pnp	GP, 50V, 150mA, 100mW, B=70..140, >80MHz	USM	16ta	-	3f	Kec
S2	-	KTA2014E-2	Si-pnp	GP, 50V, 150mA, 100mW, B=70..140, >80MHz	ESM	18ta	-	3f	Kec
S2	-	KTA2014F-2	Si-pnp	GP, 50V, 150mA, 100mW, B=70..140, >80MHz	TFSM	19ta	-	3f	Kec
S2	-	KTA2014V-2	Si-pnp	GP, 50V, 150mA, 100mW, B=70..140, >80MHz	VSM	18ta	-	3f	Kec
S2	-	R3130N26DA3	Vdet-IC	2.6V±1.5%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Ric
S20C	-	FS8844-20GC	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S21	-	GS810C21EU	Vdet-IC	2.1V±1.5%, +Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
S21C	-	FS8844-21GC	LVR-IC	LDO, 2.1V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S22C	-	FS8844-22GC	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S23C	-	FS8844-23GC	LVR-IC	LDO, 2.3V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S24	-	GS810C24EU	Vdet-IC	2.4V±1.5%, +Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
S24C	-	FS8844-24GC	LVR-IC	LDO, 2.4V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S25C	-	FS8844-25GC	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S26	-	GS810CREU	Vdet-IC	2.63V±1.5%, +Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
S26C	-	FS8844-26GC	LVR-IC	LDO, 2.6V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S27	-	GS810C27SEU	Vdet-IC	2.7V±1.5%, +Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
S27C	-	FS8844-27GC	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S28	-	BS828	n-MOSFET	D-MOS, Sw, 240V, 230mA, 310mW, <5.5Ω(100mA), 5/50ns	SOT-23	16fh	-	3a	Itt
S28C	-	FS8844-28GC	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S29	-	BS829	p-MOSFET	D-MOS, Sw, 400V, 70mA, 350mW, <40Ω(100mA), 10/50ns	SOT-23	16fh	-	3a	Itt
S29	-	GS810CSEU	Vdet-IC	2.93V±1.5%, +Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
S29C	-	FS8844-29GC	LVR-IC	LDO, 2.9V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
s2A	-	SMBT3906	Si-pnp	GP, 40V, 200mA 250MHz, B=100..300	SOT-23	16ta	-	3a	Sie
S2A	-	CH3906PT	Si-pnp	AF, Sw, 40V, 200mA, B=100..300, 250MHz	SOT-23	16ta	-	3a	Chm
s2C	-	SMBTA70	Si-pnp	GP, 40V, 100mA, 350mW, B=40..100, >125MHz	SOT-23	16ta	-	3a	Sie
s2D	-	SMBTA92	Si-pnp	Vid, 300/300V, 500mA, 330mW, B=25, >50MHz	SOT-23	16ta	-	3a	Sie
s2D	-	SMBTA92M	Si-pnp	Vid, 300/300V, 500mA, 330mW, B=25, >50MHz	SOT-23	16ta	-	3a	Sie
s2E	-	SMBTA93	Si-pnp	Vid, 200/200V, 500mA, 330mW, B=25, >50MHz	SOT-23	16ta	-	3a	Sie
s2F	-	SMBT2907A	Si-pnp	GP, 60V, 500mA, 310mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Sie
s2G	-	SMBTA56	Si-pnp	AF-Drv, 80V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3a	Sie
s2G	-	SMBTA56M	Si-pnp	AF-Drv, 80V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3a	Sie

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
s2H	-	SMBTA55	Si-pnp	AF-Drv, 60V, 500mA, 300mW, B>100, >50MHz	SOT-23	16ta	-	3a	Sie
s2P	-	SMBT5086	Si-pnp	GP, 50V, 50mA, 330mW, B=150..500, >40MHz	SOT-23	16ta	-	3a	Sie
s2Q	-	SMBT5087	Si-pnp	GP, 50V, 50mA, 330mW, B=250..800, >40MHz	SOT-23	16ta	-	3a	Sie
s2U	-	SMBTA63	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>5000, >125MHz	SOT-23	16ta	-	3a	Sie
s2V	-	SMBTA64	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>10000, >125MHz	SOT-23	16ta	-	3a	Sie
S3	-	2SA813-3	Si-pnp	GP, 60V, 200mA, 150mW, B=80..160, 200MHz	SOT-23	16ta	-	3a	Nec
S3	-	APX803-46SR	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Di
S3	-	BBQ31R	Si-npn	HF, 30V, 100mA, 330mW, B>20, >600MHz	SOT-23	16ta	-	3a	Zx
S3	-	BBY51	C-diode	Dual, Tuning, VCO, 7V, 4.5/6.1pF(4/1V)	SOT-23	16dg	-	3a	Sie
S3	-	BSV36	Si-npn	Sw, 15V, 500mA, <20/15ns	SOT-323	16te	-	3a	Fer
S3	-	ELM7633HCB	Vdet-IC	3.3V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
S3	-	ELM9743CBB	Vdet-IC	4.3V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
S3	-	R3130N29DA3	Vdet-IC	2.9V±1.5%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Ric
S30	-	FP1A4A	Si-pnp-Digi	Sw, 25V, 700mA, 200mW, R2=10k	SC-59	16ta	-	3a	Nec
S30	-	GS810CTEU	Vdet-IC	3.08V±1.5%, +Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
S30C	-	FS8844-30GC	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S31	-	FP1L2Q	Si-pnp-Digi	Sw, 25V, 700mA, 200mW, R1/R2=0k47/4k7	SC-59	16ta	-	3a	Nec
S31C	-	FS8844-31GC	LVR-IC	LDO, 3.1V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S32	-	FP1A3M	Si-pnp-Digi	Sw, 25V, 700mA, 200mW, R1/R2=1k/1k	SC-59	16ta	-	3a	Nec
S32C	-	FS8844-32GC	LVR-IC	LDO, 3.2V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S33	-	FP1F3P	Si-pnp-Digi	Sw, 25V, 700mA, 200mW, R1/R2=2k2/10k	SC-59	16ta	-	3a	Nec
S33	-	SS3P3L	Si-diode	SBR, 30V, 3A, Vf<0.47V(3A)	TO-277A	76dh	-	3o	Vs
S33C	-	FS8844-33GC	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S34	-	FP1L3N	Si-pnp-Digi	Sw, 25V, 700mA, 200mW, R1/R2=4k7/10k	SC-59	16ta	-	3a	Nec
S34	-	SS3P4L	Si-diode	SBR, 40V, 3A, Vf<0.47V(3A)	TO-277A	76dh	-	3o	Vs
S34C	-	FS8844-34GC	LVR-IC	LDO, 3.4V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S35	-	FP1A4M	Si-pnp-Digi	Sw, 30V, 700mA, 200mW, R1/R2=10k/10k	SC-59	16ta	-	3a	Nec
S35	-	FP1L3N	Si-pnp-Digi	Sw, 25V, 700mA, 200mW, R1/R2=10k/10k	SC-59	16ta	-	3a	Nec
S35	-	SS3P5L	Si-diode	SBR, 50V, 3A, Vf<0.54V(3A)	TO-277A	76dh	-	3o	Vs
S35C	-	FS8844-35GC	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S36	-	FP1J3P	Si-pnp-Digi	Sw, 25V, 700mA, 200mW, R1/R2=3k3/10k	SC-59	16ta	-	3a	Nec
S36	-	SS3P6L	Si-diode	SBR, 60V, 3A, Vf<0.54V(3A)	TO-277A	76dh	-	3o	Vs
S36C	-	FS8844-36GC	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S37C	-	FS8844-37GC	LVR-IC	LDO, 3.7V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S38C	-	FS8844-38GC	LVR-IC	LDO, 3.8V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S39C	-	FS8844-39GC	LVR-IC	LDO, 3.9V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S3B	-	LM809M3-2.63	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Nsc
S4	-	1PS89SS04	Si-diode	Dual, Schottky barrier, Ultra-Speed, 85V, 200mA, <1.5pF	SOT-490	18dl	-	3a	Phi
S4	-	2SA813-4	Si-pnp	GP, 60V, 200mA, 150mW, B=120..240, 200MHz	SOT-23	16ta	-	3a	Nec
S4	-	2SC3361-4	Si-npn	Sw, Hi-Sp, 60V, 150mA, 150mW, 100MHz, B=100..200	SOT-23	16ta	-	3a	San
S4	-	APX803-44SR	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Di
S4	-	BBQ31A	Si-npn	HF, 30V, 100mA, 330mW, B>100, >600MHz	SOT-23	16ta	-	3a	Zx
S4	-	BFQ31A	Si-npn	VHF, 30V, 100mA, 200mW, B>20, >600MHz	SOT-23	16ta	-	3a	Zx
S4	-	BSV37	Si-pnp	Sw, 12V, 500mA, <60/90ns	SOT-323	16te	-	3a	Fer
S4	-	ELM7634HCB	Vdet-IC	3.4V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
S4	-	ELM9744CBB	Vdet-IC	4.4V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
S4	-	KA4A4L	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=10k/4k7	SOT-416	16ta	-	3a	Nec
S4	-	KTA2014-4	Si-pnp	GP, 50V, 150mA, 100mW, B=120..240, >80MHz	USM	16ta	-	3f	Kec
S4	-	KTA2014E-4	Si-pnp	GP, 50V, 150mA, 100mW, B=120..240, >80MHz	ESM	18ta	-	3f	Kec
S4	-	KTA2014F-4	Si-pnp	GP, 50V, 150mA, 100mW, B=120..240, >80MHz	TFSM	19ta	-	3f	Kec
S4	-	KTA2014V-4	Si-pnp	GP, 50V, 150mA, 100mW, B=120..240, >80MHz	VSM	18ta	-	3f	Kec
S4	-	R3130N30DA8	Vdet-IC	3V±1.5%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Ric
S4	-	SP809EK-4-0	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Sip
S4	-	SST174	p-FET	Sw, 30V, 350mW, Idss=135mA, Rds(on)=85Ω, 15/20ns	SOT-23	16fj	-	3a	Six
S40	-	BAS40	Si-diode	SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-23	16dc	-	3a	Pjt
S40	-	BAS40W	Si-diode	SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-323	16dc	-	3a	Pjt
S40	-	GS810CJEU	Vdet-IC	4.0V±1.5%, +Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
S40C	-	FS8844-40GC	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S41C	-	FS8844-41GC	LVR-IC	LDO, 4.1V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S42	-	BAS40A	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-23	16df	-	3a	Pjt
S42	-	BAS40AW	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-323	16df	-	3a	Pjt
S42C	-	FS8844-42GC	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S43	-	BAS40C	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-23	16dg	-	3a	Pjt
S43	-	BAS40CW	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-323	16dg	-	3a	Pjt
S43	-	GS810CMEU	Vdet-IC	4.38V±1.5%, +Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
S43C	-	FS8844-43GC	LVR-IC	LDO, 4.3V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S44	-	BAS40S	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-23	16dl	-	3a	Pjt
S44	-	BAS40SW	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-323	16dl	-	3a	Pjt
S44C	-	FS8844-44GC	LVR-IC	LDO, 4.4V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S45C	-	FS8844-45GC	LVR-IC	LDO, 4.5V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S46	-	BAR46	Si-diode	SBR, 100V, 150mA, 230mW, Vf<1V(250mA), 10pF	SOT-23	16dc	-	3a	Ste
S46	-	BAT46	Si-diode	SBD, 100V, 150mA, Vf<1V(250mA), 6pF	SOT-23	16dc	-	3b	Ste
S46	-	GS810CLEU	Vdet-IC	4.63V±1.5%, +Reset PPO, 210ms	SOT-23	16vdc	VD7	3g	Vs
S46C	-	FS8844-46GC	LVR-IC	LDO, 4.6V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S47C	-	FS8844-47GC	LVR-IC	LDO, 4.7V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S48C	-	FS8844-48GC	LVR-IC	LDO, 4.8V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S49C	-	FS8844-49GC	LVR-IC	LDO, 4.9V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S4B	-	LM809M3-2.93	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Nsc
S5	-	1PS89SS05	Si-diode	Dual, SBD, U-Sp, 85V, 200mA, <1.5pF	SOT-490	18dg	-	3a	Phi
S5	-	2SC3361-5	Si-npn	Sw, Hi-Sp, 60V, 150mA, 150mW, 100MHz, B=140..280	SOT-23	16ta	-	3a	San
S5	-	APX803-40SR	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Di
S5	-	BBQ31AR	Si-npn	HF, 30V, 100mA, 330mW, B>100, >600MHz	SOT-23	16ta	-	3a	Zx
S5	-	BFQ31AR	Si-npn	VHF, 30V, 100mA, 200mW, B>20, >600MHz	SOT-23	16te	-	3a	Zx
S5	-	ELM7635HCB	Vdet-IC	3.5V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
S5	-	ELM9745CBB	Vdet-IC	4.5V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
S5	-	R3130N46DA5	Vdet-IC	4.6V±1.5%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Ric
S5	-	SST175	p-FET	Sw, 30V, 350mW, Idss=70mA, Rds(on)=125Ω, 15/20ns	SOT-23	16fj	-	3a	Six
S50	-	BS850	p-MOSFET	D-MOS, Sw, 60V, 250mA, 310mW, <3.5Ω(100mA), 5/25ns	SOT-23	16fh	-	3a	Itt
S50	-	LN1121P311MR	LVR-IC	LDO, 3.1V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S50	-	LN1130P311MR	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S50C	-	FS8844-50GC	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-23	16cg	VR1	3ha	Frt
S510	-	SS5P10	Si-diode	SBR, 100V, 5A, Vf<0.88V(5A)	TO-277A	76dh	-	3o	Vs
S53	-	SS5P3	Si-diode	SBR, 30V, 5A, Vf<0.52V(5A)	TO-277A	76dh	-	3o	Vs
S54	-	SS5P4	Si-diode	SBR, 40V, 5A, Vf<0.52V(5A)	TO-277A	76dh	-	3o	Vs
S55	-	SS5P5	Si-diode	SBR, 50V, 5A, Vf<0.69V(5A)	TO-277A	76dh	-	3o	Vs
S56	-	SS5P6	Si-diode	SBR, 60V, 5A, Vf<0.69V(5A)	TO-277A	76dh	-	3o	Vs
S56	-	ZHCS506	Si-diode	Schottky, 60V, 500mA, Vf<0.63V(500mA)	SOT-23	16dc	-	3a	Zx
S59	-	SS5P9	Si-diode	SBR, 90V, 5A, Vf<0.88V(5A)	TO-277A	76dh	-	3o	Vs
s5A	-	SMBD6050	Si-diode	Sw, 70V, 250mA, 370mW, Vf<1.1V(100mA), <10ns	SOT-23	16dc	-	3a	Sie
s5B	-	SMBD6100	Si-diode	Dual, Sw, 70V, 200mA, 250mW, Vf<1.1V(0.1A), <10ns	SOT-23	16dg	-	3a	Sie
S5B	-	LM809M3-3.08	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Nsc
S5B	-	LN1121P122MR	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
s5C	-	SMBD7000	Si-diode	Dual, Sw, 100V, 200mA, 330mW, Vf<1.1V(0.1A), <15ns	SOT-23	16dl	-	3a	Sie
S5C	-	LN1121P132MR	LVR-IC	LDO, 1.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
s5D	-	MMBD914	Si-diode	Sw, 100V, 250mA, 370mW, Vf<1.25V(150mA), <4ns	SOT-23	16dc	-	3a	Sie
s5D	-	SMBD914	Si-diode	Sw, 100V, 250mA, 370mW, Vf<1.25V(150mA), <4ns	SOT-23	16dc	-	3a	Sie
S5D	-	LN1121P142MR	LVR-IC	LDO, 1.4V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S5E	-	LN1121P152MR	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S5E	-	LN1130P152MR	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S5F	-	LN1121P162MR	LVR-IC	LDO, 1.6V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S5F	-	LN1130P162MR	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S5H	-	LN1121P172MR	LVR-IC	LDO, 1.7V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S5H	-	LN1130P172MR	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S5K	-	LN1121P182MR	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S5K	-	LN1130P182MR	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S5L	-	LN1121P192MR	LVR-IC	LDO, 1.9V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S5L	-	LN1130P192MR	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S5M	-	LN1121P202MR	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S5M	-	LN1130P202MR	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S5N	-	LN1121P212MR	LVR-IC	LDO, 2.1V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S5N	-	LN1130P212MR	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S5P	-	LN1121P222MR	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S5P	-	LN1130P222MR	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S5R	-	LN1121P232MR	LVR-IC	LDO, 2.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S5R	-	LN1130P232MR	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S5s	-	BAT15-05W	Si-diode	Dual, Schottky, DBS-mix, 4V, 100mA, <12GHz, <0.35pF	SOT-323	16dg	-	3c	Inf
S5s	-	BBY52	C-diode	Dual, VCO-Tuning, 7V, 20mA, 1.4..2.2pF(4/1V)	SOT-23	16dg	-	3c	Sie
S5S	-	LN1121P242MR	LVR-IC	LDO, 2.4V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S5S	-	LN1130P242MR	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S5T	-	LN1121P252MR	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S5T	-	LN1130P252MR	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S5U	-	LN1121P262MR	LVR-IC	LDO, 2.6V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S5U	-	LN1130P262MR	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S5V	-	LN1121P272MR	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S5V	-	LN1130P272MR	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S5X	-	LN1121P282MR	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S5X	-	LN1130P282MR	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S5Y	-	LN1121P292MR	LVR-IC	LDO, 2.9V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S5Y	-	LN1130P292MR	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S5Z	-	LN1121P302MR	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S5Z	-	LN1130P302MR	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S6	-	1PS89SS06	Si-diode	Dual, SBD, U-Sp, 85V, 200mA, <2pF	SOT-490	18df	-	3a	Phi
S6	-	2SC3361-6	Si-npn	Sw, Hi-Sp, 60V, 150mA, 150mW, 100MHz, B=200..400	SOT-23	16ta	-	3a	San
S6	-	APX803-31SR	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Di
S6	-	ELM7636HCB	Vdet-IC	3.6V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
S6	-	ELM9746CBB	Vdet-IC	4.6V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
S6	-	KTA2014-6	Si-pnp	GP, 50V, 150mA, 100mW, B=200..400, >80MHz	USM	16ta	-	3f	Kec
S6	-	KTA2014E-6	Si-pnp	GP, 50V, 150mA, 100mW, B=200..400, >80MHz	ESM	18ta	-	3f	Kec
S6	-	KTA2014F-6	Si-pnp	GP, 50V, 150mA, 100mW, B=200..400, >80MHz	TFSM	19ta	-	3f	Kec
S6	-	KTA2014V-6	Si-pnp	GP, 50V, 150mA, 100mW, B=200..400, >80MHz	VSM	18ta	-	3f	Kec
S6	-	SST176	p-FET	Sw, 30V, 350mW, Idss=35mA, Rds(on)=250Ω, 15/20ns	SOT-23	16fj	-	3a	Lns
S61	-	LN1121P322MR	LVR-IC	LDO, 3.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S61	-	LN1130P322MR	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S62	-	LN1121P332MR	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S62	-	LN1130P332MR	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S63	-	LN1121P342MR	LVR-IC	LDO, 3.4V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S63	-	LN1130P342MR	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S64	-	LN1121P352MR	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S64	-	LN1130P352MR	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S64C	-	SS6P4C	Si-diode	Dual, SBR, 40V, 6A, Vf<0.65V(4A)	TO-277A	76dg	-	3o	Vs
S65	-	LN1121P362MR	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S65	-	LN1130P362MR	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S66	-	LN1121P372MR	LVR-IC	LDO, 3.7V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S66	-	LN1130P372MR	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S67	-	LN1121P382MR	LVR-IC	LDO, 3.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S67	-	LN1130P382MR	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S68	-	LN1121P392MR	LVR-IC	LDO, 3.9V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S68	-	LN1130P392MR	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S69	-	LN1121P402MR	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S69	-	LN1130P402MR	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S6A	-	LN1121P412MR	LVR-IC	LDO, 4.1V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S6A	-	LN1130P412MR	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S6B	-	LM809M3-4.00	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Nsc
S6B	-	LN1121P422MR	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S6B	-	LN1130P422MR	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S6C	-	LN1121P432MR	LVR-IC	LDO, 4.3V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S6C	-	LN1130P432MR	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S6D	-	LN1121P442MR	LVR-IC	LDO, 4.4V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S6D	-	LN1130P442MR	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S6E	-	LN1121P452MR	LVR-IC	LDO, 4.5V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S6E	-	LN1130P452MR	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S6G	-	LN1121P462MR	LVR-IC	LDO, 4.6V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S6G	-	LN1130P462MR	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S6H	-	LN1121P472MR	LVR-IC	LDO, 4.7V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S6H	-	LN1130P472MR	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S6K	-	LN1121P482MR	LVR-IC	LDO, 4.8V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S6K	-	LN1130P482MR	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S6L	-	LN1121P492MR	LVR-IC	LDO, 4.9V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S6L	-	LN1130P492MR	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S6M	-	LN1121P502MR	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-23	16cg	VR1	3d	Nln
S6M	-	LN1130P502MR	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S6N	-	LN1130P512MR	LVR-IC	LDO, 5.1V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S6p	-	BF510	n-FET	VHF-LN, 2V, 30(3)mA, 250mW, 0.3pF	SOT-23	16fi	-	3a	Phi
S6P	-	LN1130P522MR	LVR-IC	LDO, 5.2V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S6R	-	LN1130P532MR	LVR-IC	LDO, 5.3V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S6S	-	LN1130P542MR	LVR-IC	LDO, 5.4V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S6T	-	LN1130P552MR	LVR-IC	LDO, 5.5V±2%, 300mA	SOT-23	16cg	VR1	3d	Nln
S7	-	1PS89SB74	Si-diode	Dual, Schottky barrier, Ultra-Speed, 70V, 70mA, <2pF	SOT-490	18dl	-	3a	Phi
S7	-	APX803-29SR	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Di
S7	-	ELM7637HCB	Vdet-IC	3.7V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
S7	-	ELM9747CBB	Vdet-IC	4.7V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
S7	-	KN4A4L	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1/R2=10k/4k7	SOT-416	16ta	-	3a	Nec
S7	-	SST177	p-FET	Sw, 30V, 350mW, Idss=20mA, Rds(on)=300Ω, 15/20ns	SOT-23	16fj	-	3a	Six
S70	-	BS870	n-MOSFET	D-MOS, Sw, 60V, 250mA, 310mW, <3.5Ω(100mA), 5/25ns	SOT-23	16fh	-	3a	Itt
S72	-	2N7002	n-MOSFET	TMOS, 60V, 250mA, 310mW, <7.5Ω(500mA), 5/25ns	SOT-23	16fh	-	3a	Itt
S76	-	SST176	p-FET	Sw, 30V, 350mW, Idss=35mA, Rds(on)=250Ω, 15/20ns	SOT-23	16fj	-	3a	Lns
S76	-	ZHCS756	Si-diode	Schottky, 60V, 750mA, Vf<0.61V(750mA)	SOT-23	16dc	-	3a	Zx
S77	-	SST177	p-FET	Sw, 30V, 350mW, Idss=20mA, Rds(on)=300Ω, 15/20ns	SOT-23	16fj	-	3a	Lns
S7B	-	LM809M3-4.38	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Nsc
S7p	-	BF511	n-FET	VHF-LN, 2V, 30(7)mA, 250mW, 0.3pF	SOT-23	16fi	-	3a	Phi



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S7s	-	BBY53	C-diode	Dual, VCO-Tuning, 6V, 20mA, 3.1..5.8pF(3..1V)	SOT-23	16dg	-	3c	Sie
S7s	-	BBY53-05W	C-diode	Dual, VCO-Tuning, 6V, 20mA, 3.1..5.8pF(3..1V)	SOT-323	16dg	-	3c	Sie
S8	-	APX803-26SR	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Di
S8	-	ELM7638HCB	Vdet-IC	3.8V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
S8	-	ELM9748CBB	Vdet-IC	4.8V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
S809J•	cw	EC49809JB-F	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ecm
S809J•	cw	S809JS	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Sew
S809L•	cw	EC49809LB-F	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ecm
S809L•	cw	S809LS	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Sew
S809M•	cw	EC49809MB-F	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ecm
S809M•	cw	S809MS	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Sew
S809R•	cw	EC49809RB-F	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ecm
S809R•	cw	S809RS	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Sew
S809S•	cw	EC49809SB-F	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ecm
S809S•	cw	S809SS	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Sew
S809T•	cw	EC49809TB-F	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ecm
S809T•	cw	S809TS	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Sew
S82	-	SS8P2L	Si-diode	SBR, 20V, 8A, Vf<0.57V(8A)	TO-277A	76dh	-	3o	Vs
S82CL	-	SS8P2CL	Si-diode	Dual, SBR, 20V, 4A, Vf<0.54V(4A)	TO-277A	76dg	-	3o	Vs
S83	-	SS8P3L	Si-diode	SBR, 30V, 8A, Vf<0.57V(8A)	TO-277A	76dh	-	3o	Vs
S83C	-	SS8P3C	Si-diode	Dual, SBR, 30V, 4A, Vf<0.58V(4A)	TO-277A	76dg	-	3o	Vs
S83CL	-	SS8P3CL	Si-diode	Dual, SBR, 30V, 4A, Vf<0.54V(4A)	TO-277A	76dg	-	3o	Vs
S84C	-	SS8P4C	Si-diode	Dual, SBR, 40V, 4A, Vf<0.58V(4A)	TO-277A	76dg	-	3o	Vs
S85C	-	SS8P5C	Si-diode	Dual, SBR, 50V, 4A, Vf<0.7V(4A)	TO-277A	76dg	-	3o	Vs
S86C	-	SS8P6C	Si-diode	Dual, SBR, 60V, 4A, Vf<0.7V(4A)	TO-277A	76dg	-	3o	Vs
S8B	-	LM809M3-4.63	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Nsc
S8p	-	BF512	n-FET	VHF-LN, 2V, 30(12)mA, 250mW, 0.3pF	SOT-23	16fi	-	3a	Phi
S8s	-	BAT15-04W	Si-diode	Dual, Schottky, DBS-mix, 4V, 100mA, <12GHz, <0.35pF	SOT-323	16dl	-	3c	Inf
S9	-	1SS394	Si-diode	Schottky, 10V, 100mA	SC-59	16dc	-	3a	Tos
S9	-	1SS395	Si-diode	Schottky, 10V, 100mA	SOT-323	16dc	-	3a	Tos
S9	-	APX803-23SR	Vdet-IC	2.25V±1.5%, -Reset ODO	SOT-23	16vdb	VD6	3b	Di
S9	-	ELM7639HCB	Vdet-IC	3.9V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
S9	-	ELM9749CBB	Vdet-IC	4.9V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
S9B	-	LM810M3-2.63	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Nsc
S9p	-	BF513	n-FET	VHF-LN, 2V, 30(18)mA, 250mW, 0.3pF	SOT-23	16fi	-	3a	Phi
SA	-	AP7313-10SR	LVR-IC	LDO, 1.0V±2%, 150mA	SOT-23	16cg	VR1	3ba	Di
SA	-	ASM809LEUR	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3d	Ali
SA	-	BSS123	n-MOSFET	V-MOS, LogL, 100V, 0.17A, 200mW, <6Ω, 10/22ns	SOT-23	16fh	-	3a	Ons
-SA	-	BSS123	n-MOSFET	V-MOS, LogL, 100V, 0.17A, 200mW, <6Ω, 10/22ns	SOT-23	16fh	-	3a	Zx
sA2	-	SMBD2836	Si-diode	Dual, Sw, 50V, 200mA, 250mW, Vf<1.2V(100mA), <6ns	SOT-23	16df	-	3a	Sie
sA3	-	SMBD2835	Si-diode	Dual, Sw, 30V, 200mA, 250mW, Vf<1.2V(100mA), <6ns	SOT-23	16df	-	3a	Sie
sA4	-	SMBD2838	Si-diode	Dual, Sw, 50V, 200mA, 250mW, Vf<1.2V(100mA), <6ns	SOT-23	16dg	-	3a	Sie
sA5	-	SMBD2837	Si-diode	Dual, Sw, 30V, 200mA, 250mW, Vf<1.2V(100mA), <6ns	SOT-23	16dg	-	3a	Sie
SAA	-	BC848A	Si-npn	GP, 30V, 100mA, 200mW, B=110..220, >300MHz	SOT-23	16ta	-	3a	Auk
SAA	-	BC848FA	Si-npn	GP, 30V, 100mA, 200mW, B=110..220, 150MHz	SOT-23F	18ta	-	3a	Auk
SAA	-	MAX809SN160	Vdet-IC	1.6V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ons
SAA	-	MAX809SN160T1	Vdet-IC	1.60V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SAA	-	S-1206B12-M3T1G	LVR-IC	LDO, 1.2V±15mV, 250mA	SOT-23	16eu	VR1	3d	Sii
-SAA	-	BSS123A	n-MOSFET	V-MOS, LogL, 100V, 0.17A, 360mW, <6Ω, 10/15ns	SOT-23	16fh	-	3a	Zx
SAB	-	BC848B	Si-npn	GP, 30V, 100mA, 200mW, B=200..450, 250MHz	SOT-23	16ta	-	3a	Auk
SAB	-	BC848FB	Si-npn	GP, 30V, 100mA, 200mW, B=200.450, 150MHz	SOT-23F	16ta	-	3a	Auk
SAB	-	LM810M3-2.93	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Nsc
SAB	-	S-1206B13-M3T1G	LVR-IC	LDO, 1.3V±15mV, 250mA	SOT-23	16eu	VR1	3d	Sii
SAC	-	BC848C	Si-npn	GP, 30V, 100mA, 200mW, B=420..800, 250MHz	SOT-23	16ta	-	3a	Auk
SAC	-	BC848FC	Si-npn	GP, 30V, 100mA, 200mW, B=420..800, 150MHz	SOT-23F	16ta	-	3a	Auk
SAC	-	S-1206B14-M3T1G	LVR-IC	LDO, 1.4V±15mV, 250mA	SOT-23	16eu	VR1	3d	Sii
SAD	-	S-1206B15-M3T1G	LVR-IC	LDO, 1.5V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAE	-	S-1206B16-M3T1G	LVR-IC	LDO, 1.6V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAF	-	S-1206B17-M3T1G	LVR-IC	LDO, 1.7V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAG	-	S-1206B18-M3T1G	LVR-IC	LDO, 1.8V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAH	-	S-1206B1J-M3T1G	LVR-IC	LDO, 1.85V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAI	-	S-1206B19-M3T1G	LVR-IC	LDO, 1.9V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAJ	-	S-1206B20-M3T1G	LVR-IC	LDO, 2.0V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAK	-	S-1206B21-M3T1G	LVR-IC	LDO, 2.1V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAL	-	S-1206B22-M3T1G	LVR-IC	LDO, 2.2V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAM	-	S-1206B23-M3T1G	LVR-IC	LDO, 2.3V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAN	-	S-1206B24-M3T1G	LVR-IC	LDO, 2.4V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAO	-	S-1206B25-M3T1G	LVR-IC	LDO, 2.5V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAP	-	S-1206B26-M3T1G	LVR-IC	LDO, 2.6V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAQ	-	S-1206B27-M3T1G	LVR-IC	LDO, 2.7V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SAR	-	KTA1531T-R	Si-pnp	AF, 20V, 1A, 900mW, B=120..240 >180MHz	TSM	16ta	-	3f	Kec
SAR	-	S-1206B28-M3T1G	LVR-IC	LDO, 2.8V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAS	-	KTA1531T-S	Si-pnp	AF, 20V, 1A, 900mW, B=150..300 >180MHz	TSM	16ta	-	3f	Kec
SAS	-	S-1206B2J-M3T1G	LVR-IC	LDO, 2.85V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAT	-	KTA1531T-T	Si-pnp	AF, 20V, 1A, 900mW, B=120..240 >180MHz	TSM	16ta	-	3f	Kec
SAT	-	S-1206B29-M3T1G	LVR-IC	LDO, 2.9V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAU	-	S-1206B30-M3T1G	LVR-IC	LDO, 3.0V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAV	-	S-1206B31-M3T1G	LVR-IC	LDO, 3.1V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAW	-	S-1206B32-M3T1G	LVR-IC	LDO, 3.2V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAX	-	S-1206B33-M3T1G	LVR-IC	LDO, 3.3V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAY	-	S-1206B34-M3T1G	LVR-IC	LDO, 3.4V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SAZ	-	S-1206B35-M3T1G	LVR-IC	LDO, 3.5V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SB	-	2SA1121-B	Si-pnp	GP, AF, 35V, 500mA, 150mW, B=60..120	SOT-23	16ta	-	3a	Ren
SB	-	AP7313-12SR	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-23	16cg	VR1	3ba	Di
SB	-	ASM809MEUR	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3d	Ali
SB	-	KTA1532T	Si-pnp	AF, 20V, 1A, 900mW, B=200..560 >210MHz	TSM	16ta	-	3f	Kec
SB	-	SMBT2222	Si-npn	GP, 60V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Sie
SBA	-	S-1206B36-M3T1G	LVR-IC	LDO, 3.6V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBB	-	LM810M3-3.08	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Nsc
SBB	-	S-1206B37-M3T1G	LVR-IC	LDO, 3.7V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBC	-	BC847C	Si-npn	GP, 50V, 100mA, 3lOmW, B=420..800, >300MHz	SOT-23	16ta	-	3a	Sam
SBC	-	S-1206B38-M3T1G	LVR-IC	LDO, 3.8V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBD	-	MAX809HTR	Vdet-IC	4.55V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SBD	-	S-1206B39-M3T1G	LVR-IC	LDO, 3.9V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBE	-	S-1206B40-M3T1G	LVR-IC	LDO, 4.0V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBF	-	S-1206B41-M3T1G	LVR-IC	LDO, 4.1V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBG	-	S-1206B42-M3T1G	LVR-IC	LDO, 4.2V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBH	-	MAX809SN490	Vdet-IC	4.9V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ons
SBH	-	MAX809SN490T1	Vdet-IC	4.9V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SBH	-	S-1206B43-M3T1G	LVR-IC	LDO, 4.3V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBI	-	S-1206B44-M3T1G	LVR-IC	LDO, 4.4V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBJ	-	S-1206B45-M3T1G	LVR-IC	LDO, 4.5V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBK	-	S-1206B46-M3T1G	LVR-IC	LDO, 4.6V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBL	-	S-1206B47-M3T1G	LVR-IC	LDO, 4.7V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBM	-	S-1206B48-M3T1G	LVR-IC	LDO, 4.8V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBN	-	S-1206B49-M3T1G	LVR-IC	LDO, 4.9V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBO	-	S-1206B50-M3T1G	LVR-IC	LDO, 5.0V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBP	-	S-1206B51-M3T1G	LVR-IC	LDO, 5.1V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBQ	-	S-1206B52-M3T1G	LVR-IC	LDO, 5.2V±1.0%, 250mA	SOT-23	16eu	VR1	3d	Sii
SBs	-	BSS145	n-MOSFET	V-MOS, 65V, 220mA, <3.5Ω, 11/27ns	SOT-23	16fh	-	3a	Sie
sc	-	PT7M7803JT	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23	16vdc	VD7	3b	Pti
sc	cv	PT7M7803JTE	Vdet-IC	4.0V±1.5%, -Reset ODO, Lead free	SOT-23	16vdc	VD7	3b	Pti
SC	-	2SA1121-C	Si-pnp	GP, AF, 35V, 500mA, 150mW, B=100..200	SOT-23	16ta	-	3a	Ren
SC	-	AP7313-15SR	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-23	16cg	VR1	3ba	Di
SC	-	ASM809JEUR	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3d	Ali
SC	-	SMBT2222A	Si-npn	GP, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Sie
sC3	-	SMBT4126	Si-pnp	GP, 25V, 200mA, 350mW, B=120..360, >250MHz	SOT-23	16ta	-	3c	Inf
SCB	-	LM810M3-4.00	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Nsc
SCQ	-	NCP803SN160T1	Vdet-IC	1.60V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ons
SD	-	2SA1121-D	Si-pnp	GP, AF, 35V, 500mA, 150mW, B=160..320	SOT-23	16ta	-	3a	Ren
SD	-	AP7313-18SR	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-23	16cg	VR1	3ba	Di
SD	-	ASM809TEUR	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3d	Ali
SD	-	BSS145	n-MOSFET	V-MOS, 65V, 220mA, <3.5Ω, 11/27ns	SOT-23	16fh	-	3a	Sie
SD	-	BSS284	p-MOSFET	V-MOS, LogL, 50V, 130mA, 19/30ns	SOT-23	16fh	-	3a	Sie
SD	-	SMBT2907	Si-pnp	GP, 40V, 500mA, 310mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Sie
SDB	-	LM810M3-4.38	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Nsc
SDs	-	BSS284	p-MOSFET	V-MOS, LogL, 50V, 130mA, 19/30ns	SOT-23	16fh	-	3a	Sie
se	-	PT7M7810JT	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Pti
se	cv	PT7M7810JTE	Vdet-IC	4.0V±1.5%, +Reset PPO, Lead free	SOT-23	16vdc	VD7	3b	Pti
SE	-	AP7313-20SR	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-23	16cg	VR1	3ba	Di
SE	-	ASM809SEUR	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3d	Ali
SE	-	SMBT2907A	Si-pnp	GP, 60V, 500mA, 310mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Sie
SEB	-	LM810M3-4.63	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Nsc
SEs	-	BSS159	n-MOSFET	V-MOS, 50V, 160mA, <8Ω(70mA)	SOT-23	16fh	-	3a	Sie
SF	-	AP7313-25SR	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-23	16cg	VR1	3ba	Di
SF	-	ASM809REUR	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3d	Ali
SF	-	SMBTA13	Si-npn-Darl	GP, 30V, 300mA, 300mW, B>5000, >125MHz	SOT-23	16ta	-	3a	Sie
SF0	-	BB804-0	C-diode	Dual, VHF, 18V, 50mA, 42/43.5pF	SOT-23	16dg	-	3a	Sie
SF0	-	BB804F0	C-diode	Dual, 18V, <50mA, Rs<0.2Ω, 42/43.pF	SOT-23	16dg	-	3a	Sie
SF1	-	BB804-1	C-diode	Dual, VHF, 18V, 50mA, 43/44.5pF	SOT-23	16dg	-	3a	Sie



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SF1	-	BB804F1	C-diode	Dual, 18V, <50mA, 43/44.5pF	SOT-23	16dg	-	3a	Sie
SF2	-	BB804-2	C-diode	Dual, VHF, 18V, 50mA, 44/45.5pF	SOT-23	16dg	-	3a	Sie
SF2	-	BB804F2	C-diode	Dual, 18V, <50mA, 44/45.5pF	SOT-23	16dg	-	3a	Sie
SF2	-	BB804W	C-diode	Dual, VHF, 18V, 50mA, 45/26pF	SOT-23	16dg	-	3a	Phi
SF3	-	BB804-3	C-diode	Dual, VHF, 18V, 50mA, 45/46.5pF	SOT-23	16dg	-	3a	Sie
SF3	-	BB804F3	C-diode	Dual, 18V, <50mA, 45/46.5pF	SOT-23	16dg	-	3a	Sie
SF4	-	BB804-4	C-diode	Dual, VHF, 18V, 50mA, 46/47.5pF	SOT-23	16dg	-	3a	Sie
SF4	-	BB804F4	C-diode	Dual, 18V, <50mA, 46/47.5pF	SOT-23	16dg	-	3a	Sie
SF5	-	BB804	C-diode	Dual, VHF, 18V, 50mA, 45/26pF	SOT-23	16dg	-	3a	Phi
SFB	-	LM809M3-2.45	Vdet-IC	2.45V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Nsc
SFs	-	BB804	C-diode	Dual, VHF, 18V, 50mA, 42/43.5pF	SOT-23	16dg	-	3a	Sie
SFs	-	BSS169	n-MOSFET	V-MOS, 100V, 120mA, <12Ω(0.5A)	SOT-23	16fh	-	3a	Sie
SG	-	2SA1162-GR	Si-pnp	GP, AF, 50V, 150mA, 150mW, B=200..400, >80MHz	SOT-23	16ta	-	3a	Tos
SG	-	2SA1586-GR	Si-pnp	GP, AF, 50V, 150mA, 100mW, B=200..400, >70MHz	SOT-323	16ta	-	3a	Tos
SG	-	2SA1832FT-GR	Si-pnp	GP, 50V, 150mA, 100mW, B=200..400, 80MHz	TESM	18ta	-	3a	Tos
SG	-	AP7313-28SR	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-23	16cg	VR1	3ba	Di
SG	-	ASM810LEUR	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3d	Ali
SG	-	SMBTA14	Si-npn-Darl	GP, 30V, 300mA, 300mW, B>10000, >125MHz	SOT-23	16ta	-	3a	Sie
SG15G	-	LR1101G-15-AE3-5	LVR-IC	LDO, 1.5V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG15L	-	LR1101L-15-AE3-5	LVR-IC	LDO, 1.5V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG16G	-	LR1101G-16-AE3-5	LVR-IC	LDO, 1.6V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG16L	-	LR1101L-16-AE3-5	LVR-IC	LDO, 1.6V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG17G	-	LR1101G-17-AE3-5	LVR-IC	LDO, 1.7V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG17L	-	LR1101L-17-AE3-5	LVR-IC	LDO, 1.7V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG18G	-	LR1101G-18-AE3-5	LVR-IC	LDO, 1.8V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG18L	-	LR1101L-18-AE3-5	LVR-IC	LDO, 1.8V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG19G	-	LR1101G-19-AE3-5	LVR-IC	LDO, 1.9V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG19L	-	LR1101L-19-AE3-5	LVR-IC	LDO, 1.9V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG20G	-	LR1101G-20-AE3-5	LVR-IC	LDO, 2.0V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG20L	-	LR1101L-20-AE3-5	LVR-IC	LDO, 2.0V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG21G	-	LR1101G-21-AE3-5	LVR-IC	LDO, 2.1V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG21L	-	LR1101L-21-AE3-5	LVR-IC	LDO, 2.1V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG22G	-	LR1101G-22-AE3-5	LVR-IC	LDO, 2.2V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG22L	-	LR1101L-22-AE3-5	LVR-IC	LDO, 2.2V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG23G	-	LR1101G-23-AE3-5	LVR-IC	LDO, 2.3V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG23L	-	LR1101L-23-AE3-5	LVR-IC	LDO, 2.3V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG24G	-	LR1101G-24-AE3-5	LVR-IC	LDO, 2.4V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG24L	-	LR1101L-24-AE3-5	LVR-IC	LDO, 2.4V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG25G	-	LR1101G-25-AE3-5	LVR-IC	LDO, 2.5V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG25L	-	LR1101L-25-AE3-5	LVR-IC	LDO, 2.5V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG26G	-	LR1101G-26-AE3-5	LVR-IC	LDO, 2.6V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG26L	-	LR1101L-26-AE3-5	LVR-IC	LDO, 2.6V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG27G	-	LR1101G-27-AE3-5	LVR-IC	LDO, 2.7V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG27L	-	LR1101L-27-AE3-5	LVR-IC	LDO, 2.7V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG28G	-	LR1101G-28-AE3-5	LVR-IC	LDO, 2.8V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG28L	-	LR1101L-28-AE3-5	LVR-IC	LDO, 2.8V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG29G	-	LR1101G-29-AE3-5	LVR-IC	LDO, 2.9V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG29L	-	LR1101L-29-AE3-5	LVR-IC	LDO, 2.9V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG30G	-	LR1101G-30-AE3-5	LVR-IC	LDO, 3.0V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG30L	-	LR1101L-30-AE3-5	LVR-IC	LDO, 3.0V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG31G	-	LR1101G-31-AE3-5	LVR-IC	LDO, 3.1V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG31L	-	LR1101L-31-AE3-5	LVR-IC	LDO, 3.1V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG32G	-	LR1101G-32-AE3-5	LVR-IC	LDO, 3.2V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG32L	-	LR1101L-32-AE3-5	LVR-IC	LDO, 3.2V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG33G	-	LR1101G-33-AE3-5	LVR-IC	LDO, 3.3V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG33L	-	LR1101L-33-AE3-5	LVR-IC	LDO, 3.3V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG34G	-	LR1101G-34-AE3-5	LVR-IC	LDO, 3.4V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG34L	-	LR1101L-34-AE3-5	LVR-IC	LDO, 3.4V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG35G	-	LR1101G-35-AE3-5	LVR-IC	LDO, 3.5V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG35L	-	LR1101L-35-AE3-5	LVR-IC	LDO, 3.5V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG36G	-	LR1101G-36-AE3-5	LVR-IC	LDO, 3.6V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG36L	-	LR1101L-36-AE3-5	LVR-IC	LDO, 3.6V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG37G	-	LR1101G-37-AE3-5	LVR-IC	LDO, 3.7V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG37L	-	LR1101L-37-AE3-5	LVR-IC	LDO, 3.7V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG38G	-	LR1101G-38-AE3-5	LVR-IC	LDO, 3.8V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG38L	-	LR1101L-38-AE3-5	LVR-IC	LDO, 3.8V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG39G	-	LR1101G-39-AE3-5	LVR-IC	LDO, 3.9V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG39L	-	LR1101L-39-AE3-5	LVR-IC	LDO, 3.9V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG40G	-	LR1101G-40-AE3-5	LVR-IC	LDO, 4.0V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG40L	-	LR1101L-40-AE3-5	LVR-IC	LDO, 4.0V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SG41G	-	LR1101G-41-AE3-5	LVR-IC	LDO, 4.1V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG41L	-	LR1101L-41-AE3-5	LVR-IC	LDO, 4.1V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG42G	-	LR1101G-42-AE3-5	LVR-IC	LDO, 4.2V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG42L	-	LR1101L-42-AE3-5	LVR-IC	LDO, 4.2V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG43G	-	LR1101G-43-AE3-5	LVR-IC	LDO, 4.3V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG43L	-	LR1101L-43-AE3-5	LVR-IC	LDO, 4.3V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG44G	-	LR1101G-44-AE3-5	LVR-IC	LDO, 4.4V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG44L	-	LR1101L-44-AE3-5	LVR-IC	LDO, 4.4V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG45G	-	LR1101G-45-AE3-5	LVR-IC	LDO, 4.5V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG45L	-	LR1101L-45-AE3-5	LVR-IC	LDO, 4.5V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG46G	-	LR1101G-46-AE3-5	LVR-IC	LDO, 4.6V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG46L	-	LR1101L-46-AE3-5	LVR-IC	LDO, 4.6V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG47G	-	LR1101G-47-AE3-5	LVR-IC	LDO, 4.7V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG47L	-	LR1101L-47-AE3-5	LVR-IC	LDO, 4.7V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG48G	-	LR1101G-48-AE3-5	LVR-IC	LDO, 4.8V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG48L	-	LR1101L-48-AE3-5	LVR-IC	LDO, 4.8V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG49G	-	LR1101G-49-AE3-5	LVR-IC	LDO, 4.9V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG49L	-	LR1101L-49-AE3-5	LVR-IC	LDO, 4.9V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SG50G	-	LR1101G-50-AE3-5	LVR-IC	LDO, 5.0V±2%, 100mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SG50L	-	LR1101L-50-AE3-5	LVR-IC	LDO, 5.0V±2%, 100mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SGB	-	MCP810M3-2.63	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Nsc
SGR	-	KTA2014E-GR	Si-pnp	AF, Sw, 50V, 150mA, 100mW, B=200..400, >80MHz	ESM	18ta	-	3f	Kec
SGR	-	KTA2014F-GR	Si-pnp	AF, Sw, 50V, 150mA, 100mW, B=200..400, >80MHz	TFSM	19ta	-	3f	Kec
SGR	-	KTA2014-GR	Si-pnp	AF, Sw, 50V, 150mA, 100mW, B=200..400, >80MHz	USM	16ta	-	3f	Kec
SGR	-	KTA2014V-GR	Si-pnp	AF, Sw, 50V, 150mA, 100mW, B=200..400, >80MHz	VSM	18ta	-	3f	Kec
SH	-	AP7313-30SR	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-23	16cg	VR1	3ba	Di
SH	-	ASM810MEUR	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3d	Ali
SH	-	BSS119	n-MOSFET	V-MOS, 100V, 170mA, <6Ω, 9/24ns	SOT-23	16fh	-	3c	Sie
SH1	-	BB814	C-diode	Dual, FM/VHF, 18V, 50mA, 21.9/43pF(8V..2V, 1MHz)	SOT-23	16dg	-	3c	Inf
SH1	-	BB814H1	C-diode	Dual, 18V, <50mA, 43/45pF	SOT-23	16dg	-	3a	Sie
SH2	-	BB814	C-diode	Dual, FM/VHF, 18V, 50mA, 22.7/44.5pF(8V..2V, 1MHz)	SOT-23	16dg	-	3c	Inf
SH2	-	BB814H2	C-diode	Dual, 18V, <50mA, 44.5/46.5pF	SOT-23	16dg	-	3a	Sie
SHB	-	MCP810M3-2.93	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Nsc
SI	-	ASM810JEUR	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3d	Ali
SJ	-	1N5817	Si-diode	SBR, 20V, 1A, Vf<0.45V(1A), 120pF	SOT-23	16dc	-	3a	Trs
SJ	-	AP7313-33SR	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-23	16cg	VR1	3ba	Di
SJ	-	ASM810TEUR	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3d	Ali
SJ	-	MCP120-270I	Vdet-IC	2.62V, -Reset ODO	SOT-23	16vdb	VD6	3d	Mcc
SJ	-	SMBTA92	Si-pnp	Vid, 300/300V, 500mA, 330mW, B=25, >50MHz	SOT-23	16ta	-	3a	Sie
SJB	-	MCP810M3-3.08	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Nsc
SK	-	ASM810SEUR	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3d	Ali
SK	-	MCP120-300I	Vdet-IC	2.92V, -Reset ODO	SOT-23	16vdb	VD6	3d	Mcc
SK	-	SMBTA93	Si-pnp	Vid, 200/200V, 500mA, 330mW, B=25, >50MHz	SOT-23	16ta	-	3a	Sie
SKB	-	MCP810M3-4.00	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Nsc
SKs	-	BSS138N	n-MOSFET	SIPMOS, LogL, 60V, 220mA, 360mW, 3.5Ω(220mA), 5/12ns	SOT-23	16fh	-	3c	Inf
SL	-	1N5819	Si-diode	SBR, 40V, 1A, Vf<0.6V(1A), 120pF	SOT-23	16dc	-	3a	Trs
SL	-	2SA1571	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=47k	SOT-23	16ta	-	3a	San
SL	-	ASM810REUR	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3d	Ali
SL	-	MCP120-315I	Vdet-IC	3.07V, -Reset ODO	SOT-23	16vdb	VD6	3d	Mcc
SL	-	SMBTA42	Si-npn	Vid, 300V, 500mA, 1W, B>40, >50MHz	SOT-23	16ta	-	3a	Sie
SLB	-	MCP810M3-4.38	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Nsc
SM	-	2SC3082K-M	Si-npn	AF, 30V, 50mA, 200mW, B=39..82, >110MHz	SOT-346	16ta	-	3a	Rhm
SM	-	2SC4100-M	Si-npn	AF, 30V, 50mA, 200mW, B=39..82, >110MHz	SOT-323	16ta	-	3a	Rhm
SM	-	2SC4619-M	Si-npn	HF-Amp, 30V, 50mA, 150mW, B=39..82, 110MHz	SOT-416	16ta	-	3a	Rhm
SM	-	BB914	C-diode	Dual, FM-Tuning, 20V, 42.5/45pF(8/2V)	SOT-23	16dg	-	3a	Sie
SM	-	MCP120-450I	Vdet-IC	4.37V, -Reset ODO	SOT-23	16vdb	VD6	3d	Mcc
SM	-	SDMP0340LT	Si-diode	Schottky, Sw, 40V, 200mA, 150mW, 2pF	SOT-523	16dc	-	3b	Di
SM	-	SMBTA43	Si-npn	Vid, 200/200V, 200mA, 350mW, B>25, >50MHz	SOT-23	16ta	-	3a	Sie
SM18G	-	LR1106G-18-AB3-B	LVR-IC	LDO, 1.8V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM18L	-	LR1106L-18-AB3-B	LVR-IC	LDO, 1.8V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM19G	-	LR1106G-19-AB3-B	LVR-IC	LDO, 1.9V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM19L	-	LR1106L-19-AB3-B	LVR-IC	LDO, 1.9V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM20G	-	LR1106G-20-AB3-B	LVR-IC	LDO, 2.0V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM20L	-	LR1106L-20-AB3-B	LVR-IC	LDO, 2.0V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM21G	-	LR1106G-21-AB3-B	LVR-IC	LDO, 2.1V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM21L	-	LR1106L-21-AB3-B	LVR-IC	LDO, 2.1V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM22G	-	LR1106G-22-AB3-B	LVR-IC	LDO, 2.2V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM22L	-	LR1106L-22-AB3-B	LVR-IC	LDO, 2.2V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM23G	-	LR1106G-23-AB3-B	LVR-IC	LDO, 2.3V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM23L	-	LR1106L-23-AB3-B	LVR-IC	LDO, 2.3V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SM24G	-	LR1106G-24-AB3-B	LVR-IC	LDO, 2.4V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM24L	-	LR1106L-24-AB3-B	LVR-IC	LDO, 2.4V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM25G	-	LR1106G-25-AB3-B	LVR-IC	LDO, 2.5V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM25L	-	LR1106L-25-AB3-B	LVR-IC	LDO, 2.5V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM26G	-	LR1106G-26-AB3-B	LVR-IC	LDO, 2.6V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM26L	-	LR1106L-26-AB3-B	LVR-IC	LDO, 2.6V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM27G	-	LR1106G-27-AB3-B	LVR-IC	LDO, 2.7V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM27L	-	LR1106L-27-AB3-B	LVR-IC	LDO, 2.7V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM28G	-	LR1106G-28-AB3-B	LVR-IC	LDO, 2.8V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM28L	-	LR1106L-28-AB3-B	LVR-IC	LDO, 2.8V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM29G	-	LR1106G-29-AB3-B	LVR-IC	LDO, 2.9V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM29L	-	LR1106L-29-AB3-B	LVR-IC	LDO, 2.9V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM2JG	-	LR1106G-2J-AB3-B	LVR-IC	LDO, 2.85V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM2JL	-	LR1106L-2J-AB3-B	LVR-IC	LDO, 2.85V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM30G	-	LR1106G-30-AB3-B	LVR-IC	LDO, 3.0V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM30L	-	LR1106L-30-AB3-B	LVR-IC	LDO, 3.0V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM31G	-	LR1106G-31-AB3-B	LVR-IC	LDO, 3.1V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM31L	-	LR1106L-31-AB3-B	LVR-IC	LDO, 3.1V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM32G	-	LR1106G-32-AB3-B	LVR-IC	LDO, 3.2V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM32L	-	LR1106L-32-AB3-B	LVR-IC	LDO, 3.2V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM33G	-	LR1106G-33-AB3-B	LVR-IC	LDO, 3.3V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM33L	-	LR1106L-33-AB3-B	LVR-IC	LDO, 3.3V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM34G	-	LR1106G-34-AB3-B	LVR-IC	LDO, 3.4V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM34L	-	LR1106L-34-AB3-B	LVR-IC	LDO, 3.4V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM35G	-	LR1106G-35-AB3-B	LVR-IC	LDO, 3.5V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM35L	-	LR1106L-35-AB3-B	LVR-IC	LDO, 3.5V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM36G	-	LR1106G-36-AB3-B	LVR-IC	LDO, 3.6V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM36L	-	LR1106L-36-AB3-B	LVR-IC	LDO, 3.6V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM37G	-	LR1106G-37-AB3-B	LVR-IC	LDO, 3.7V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM37L	-	LR1106L-37-AB3-B	LVR-IC	LDO, 3.7V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM38G	-	LR1106G-38-AB3-B	LVR-IC	LDO, 3.8V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM38L	-	LR1106L-38-AB3-B	LVR-IC	LDO, 3.8V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM39G	-	LR1106G-39-AB3-B	LVR-IC	LDO, 3.9V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM39L	-	LR1106L-39-AB3-B	LVR-IC	LDO, 3.9V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM3KG	-	SSM3K333RG-AE3	n-MOSFET	Switching, 30V, 6A, 1W, 18.7 mΩ(5A), 12/9ns, Halogen-free	SOT-23	16fh	-	3a	Utc
SM3KL	-	SSM3K333RL-AE3	n-MOSFET	Switching, 30V, 6A, 1W, 18.7 mΩ(5A), 12/9ns, Lead-free	SOT-23	16fh	-	3a	Utc
SM40G	-	LR1106G-40-AB3-B	LVR-IC	LDO, 4.0V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM40L	-	LR1106L-40-AB3-B	LVR-IC	LDO, 4.0V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM41G	-	LR1106G-41-AB3-B	LVR-IC	LDO, 4.1V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM41L	-	LR1106L-41-AB3-B	LVR-IC	LDO, 4.1V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM42G	-	LR1106G-42-AB3-B	LVR-IC	LDO, 4.2V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM42L	-	LR1106L-42-AB3-B	LVR-IC	LDO, 4.2V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM43G	-	LR1106G-43-AB3-B	LVR-IC	LDO, 4.3V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM43L	-	LR1106L-43-AB3-B	LVR-IC	LDO, 4.3V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM44G	-	LR1106G-44-AB3-B	LVR-IC	LDO, 4.4V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM44L	-	LR1106L-44-AB3-B	LVR-IC	LDO, 4.4V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM45G	-	LR1106G-45-AB3-B	LVR-IC	LDO, 4.5V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM45L	-	LR1106L-45-AB3-B	LVR-IC	LDO, 4.5V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM46G	-	LR1106G-46-AB3-B	LVR-IC	LDO, 4.6V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM46L	-	LR1106L-46-AB3-B	LVR-IC	LDO, 4.6V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM47G	-	LR1106G-47-AB3-B	LVR-IC	LDO, 4.7V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM47L	-	LR1106L-47-AB3-B	LVR-IC	LDO, 4.7V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM48G	-	LR1106G-48-AB3-B	LVR-IC	LDO, 4.8V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM48L	-	LR1106L-48-AB3-B	LVR-IC	LDO, 4.8V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM49G	-	LR1106G-49-AB3-B	LVR-IC	LDO, 4.9V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM49L	-	LR1106L-49-AB3-B	LVR-IC	LDO, 4.9V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM50G	-	LR1106G-50-AB3-B	LVR-IC	LDO, 5.0V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM50L	-	LR1106L-50-AB3-B	LVR-IC	LDO, 5.0V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM51G	-	LR1106G-51-AB3-B	LVR-IC	LDO, 5.1V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM51L	-	LR1106L-51-AB3-B	LVR-IC	LDO, 5.1V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM52G	-	LR1106G-52-AB3-B	LVR-IC	LDO, 5.2V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM52L	-	LR1106L-52-AB3-B	LVR-IC	LDO, 5.2V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM53G	-	LR1106G-53-AB3-B	LVR-IC	LDO, 5.3V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM53L	-	LR1106L-53-AB3-B	LVR-IC	LDO, 5.3V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM54G	-	LR1106G-54-AB3-B	LVR-IC	LDO, 5.4V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM54L	-	LR1106L-54-AB3-B	LVR-IC	LDO, 5.4V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM55G	-	LR1106G-55-AB3-B	LVR-IC	LDO, 5.5V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM55L	-	LR1106L-55-AB3-B	LVR-IC	LDO, 5.5V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM56G	-	LR1106G-56-AB3-B	LVR-IC	LDO, 5.6V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM56L	-	LR1106L-56-AB3-B	LVR-IC	LDO, 5.6V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SM57G	-	LR1106G-57-AB3-B	LVR-IC	LDO, 5.7V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM57L	-	LR1106L-57-AB3-B	LVR-IC	LDO, 5.7V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM58G	-	LR1106G-58-AB3-B	LVR-IC	LDO, 5.8V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM58L	-	LR1106L-58-AB3-B	LVR-IC	LDO, 5.8V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM59G	-	LR1106G-59-AB3-B	LVR-IC	LDO, 5.9V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM59L	-	LR1106L-59-AB3-B	LVR-IC	LDO, 5.9V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SM60G	-	LR1106G-60-AB3-B	LVR-IC	LDO, 6.0V±2%, 400mA, Halogen-free	SOT-23	16cg	VR1	3a	Utc
SM60L	-	LR1106L-60-AB3-B	LVR-IC	LDO, 6.0V±2%, 400mA, Lead-free	SOT-23	16cg	VR1	3a	Utc
SMs	-	BB914	C-diode	Dual, FM-Tuning, 20V, 42.5/45pF(8/2V)	SOT-23	16dg	-	3a	Sie
SN	-	2SC3082K-N	Si-npn	AF, 30V, 50mA, 200mW, B=56..120, >110MHz	SOT-346	16ta	-	3a	Rhm
SN	-	2SC4100-N	Si-npn	AF, 30V, 50mA, 200mW, B=56..120, >110MHz	SOT-323	16ta	-	3a	Rhm
SN	-	2SC4619-N	Si-npn	GP, 30V, 50mA, 150mW, B=56..120, 110MHz	SOT-416	16ta	-	3a	Rhm
SN	-	MCP120-460I	Vdet-IC	4.47V, -Reset ODO	SOT-23	16vdb	VD6	3d	Mcc
SN	-	SDMP0340LST	Si-diode	Dual, Schottky , Sw, 40V, 200mA, 150mW, 2pF	SOT-523	16dl	-	3b	Di
SN	-	SMBT3904	Si-npn	GP, 60V, 0.1A, 200mW, B= 100..300, >300MHz	SOT-23	16ta	-	3a	Sie
SNB	-	MCP810M3-4.63	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Nsc
SO	-	2SA1162-O	Si-pnp	GP, AF, 50V, 150mA, 150mW, B=70..140, >80MHz	SOT-23	16ta	-	3a	Tos
SO	-	2SA1586-O	Si-pnp	GP, AF, 50V, 150mA, 100mW, B=70..140, >70MHz	SOT-323	16ta	-	3a	Tos
SO	-	KTA2014E-O	Si-pnp	AF, Sw, 50V, 150mA, 100mW, B=70..140, >80MHz	ESM	18ta	-	3f	Kec
SO	-	KTA2014F-O	Si-pnp	AF, Sw, 50V, 150mA, 100mW, B=70..140, >80MHz	TFSM	19ta	-	3f	Kec
SO	-	KTA2014-O	Si-pnp	AF, Sw, 50V, 150mA, 100mW, B=70..140, >80MHz	USM	16ta	-	3f	Kec
SO	-	KTA2014V-O	Si-pnp	AF, Sw, 50V, 150mA, 100mW, B=70..140, >80MHz	VSM	18ta	-	3f	Kec
SO	-	MCP120-475I	Vdet-IC	4.62V, -Reset ODO	SOT-23	16vdb	VD6	3d	Mcc
SO	-	SMBT3906	Si-pnp	GP, 40V, 200mA 250MHz, B=100..300	SOT-23	16ta	-	3a	Sie
SP	-	2SC3082K-P	Si-npn	AF, 30V, 50mA, 200mW, B=82..180, >110MHz	SOT-346	16ta	-	3a	Rhm
SP	-	2SC4100-P	Si-npn	AF, 30V, 50mA, 200mW, B=82..180, >110MHz	SOT-323	16ta	-	3a	Rhm
SP	-	2SC4619-P	Si-npn	GP, 30V, 50mA, 150mW, B=82..180, 110MHz	SOT-416	16ta	-	3a	Rhm
SP	-	BSS84	p-MOSFET	V-MOS, LogL, 50V, 130mA, 250mW, <10Ω(130mA), 3/7ns	SOT-23	16fh	-	3a	Phi
SP	-	MCP120-485I	Vdet-IC	4.72V, -Reset ODO	SOT-23	16vdb	VD6	3d	Mcc
SP	-	SDMP0340LCT	Si-diode	Dual, Schottky, Sw, 40V, 200mA, 150mW, 2pF	SOT-523	16dg	-	3b	Di
SPB	-	MCP809M3-2.63	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Nsc
SPR	-	MAX809JTR	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SPs	-	BSS84	p-MOSFET	V-MOS, LogL, 50V, 130mA, 250mW, <10Ω(130mA), 3/7ns	SOT-23	16fh	-	3c	Inf
SPS	-	MAX809RTR	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SPT	-	MAX809STR	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SPU	-	MAX809TTR	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SPV	-	MAX809MTR	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SPW	-	MAX809LTR	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SPX	-	MAX810RTR	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SPY	-	MAX810STR	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SPZ	-	MAX810TTR	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SQ	-	2SC3082K-Q	Si-npn	AF, 30V, 50mA, 200mW, B=120..270, >110MHz	SOT-346	16ta	-	3a	Rhm
SQ	-	2SC4100-Q	Si-npn	AF, 30V, 50mA, 200mW, B=120..270, >110MHz	SOT-323	16ta	-	3a	Rhm
SQ	-	2SC4619-Q	Si-npn	GP, 30V, 50mA, 150mW, B=120..270, 110MHz	SOT-416	16ta	-	3a	Rhm
SQ	-	SDMP0340LAT	Si-diode	Dual, Schottky, Sw, 40V, 200mA, 150mW, 2pF	SOT-523	16df	-	3b	Di
SQA	-	MAX810MTR	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SQB	-	MAX810LTR	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SQC	-	NCP803SN263T1	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ons
SQD	-	NCP803SN293T1	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ons
SQE	-	NCP803SN308T1	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ons
SQF	-	NCP803SN438T1	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ons
SQG	-	NCP803SN463T1	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ons
SQP	-	MAX809SN232	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Ons
SQP	-	MAX809SN232T1	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SQR	-	NCP803SN232T1	Vdet-IC	2.32V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Ons
SR	-	2SC2405-R	Si-npn	AF, LN, 55V, 10mA, 200mW, B=180..360, 200MHz	SOT-23	16ta	-	3a	Pan
SR	-	2SC3929-R	Si-npn	AF, LN, 35V, 50mA, 150mW, B=180..360, 80MHz	SOT-323	16ta	-	3a	Pan
SR	-	CAT809SSDI-GT3	Vdet-IC	2.93V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3d	Ons
SR	-	CAT809STBI-GT3	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SRB	-	MCP809M3-2.93	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Nsc
SRs	-	BSS131	n-MOSFET	SIPMOS, LogL, 240V, 100mA, 360mW, <16Ω(100mA), 5/12ms	SOT-23	16fh	-	3c	Inf
SS	-	2SC2405-S	Si-npn	AF, LN, 55V, 10mA, 200mW, B=260..520, 200MHz	SOT-23	16ta	-	3a	Pan
SS	-	2SC3929-S	Si-npn	AF, LN, 35V, 50mA, 150mW, B=260..520, 80MHz	SOT-323	16ta	-	3a	Pan
SS	-	CAT810SSDI-GT3	Vdet-IC	2.93V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3d	Ons
SS	-	CAT810STBI-GT3	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ons
-SS	-	BSS138	n-MOSFET	SIPMOS, LogL, 50V, 200mA, 360mW, 3.5Ω(200mA), 10/15ns	SOT-23	16fh	-	3a	Zx
SSB	-	MCP809M3-3.08	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Nsc
sSH	-	BSS119	n-MOSFET	V-MOS, 100V, 170mA, 200mW, <6Ω(170mA), 9/24ns	SOT-23	16fh	-	3c	Sie
sSJ	-	BSS7728	n-MOSFET	V-MOS, 60V, 150mA, 11/27ns	SOT-23	16fh	-	3a	Sie
SSO	-	MAX809SN120T1G	Vdet-IC	1.2V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SSP	-	MAX809SN293D1T1G	Vdet-IC	2.93V±1.5%, 1ms, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SSQ	-	MAX809SN293D2T1G	Vdet-IC	2.93V±1.5%, 20ms, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SSR	-	MAX809SN293D3T1G	Vdet-IC	2.93V±1.5%, 100ms, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SSs	-	BSS138	n-MOSFET	SIPMOS, LogL, 50V, 220mA, 360mW, 3.5Ω(220mA), 5/12ns	SOT-23	16fh	-	3c	Inf
SSS	-	MAX810SN120T1G	Vdet-IC	1.2V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SST	-	MAX810SN293D1T1G	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SSU	-	MAX810SN293D2T1G	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ons
SSZ	-	MAX810SN293D3T1G	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ons
ST	-	2SA1036KPT-P	Si-pnp	AF, Sw, 32V, 500mA, B=82..180, 200MHz	SOT-23	16ta	-	3a	Chm
ST	-	2SC2405-T	Si-npn	AF, LN, 55V, 10mA, 200mW, B=360..700, 200MHz	SOT-23	16ta	-	3a	Pan
ST	-	2SC3929-T	Si-npn	AF, LN, 35V, 50mA, 150mW, B=360..700, 80MHz	SOT-323	16ta	-	3a	Pan
ST	-	BSS139	n-MOSFET	V-MOS, 250V, 40mA, <100Ω, 14/25ns	SOT-23	16fh	-	3a	Sie
ST2	-	2SC4452-2	Si-npn	Sw, Hi-Sp, 40V, 200mA, 150mW, 750MHz, B=50..100	MCP	16ta	-	3a	San
ST2	-	2SC4453-2	Si-npn	Sw, Hi-Sp, 40V, 200mA, 200mW, 750MHz, B=50..100	CP	16ta	-	3a	San
ST2N	-	2N7002	n-MOSFET	TMOS, 60V, 350mA, 1W, <5Ω(350mA), 5/7ns	SOT-23-3L	16fh	-	3b	Ste
ST3	-	2SC4452-3	Si-npn	Sw, Hi-Sp, 40V, 200mA, 150mW, 750MHz, B=70..140	MCP	16ta	-	3a	San
ST3	-	2SC4453-3	Si-npn	Sw, Hi-Sp, 40V, 200mA, 200mW, 750MHz, B=70..140	CP	16ta	-	3a	San
ST4	-	2SC4452-4	Si-npn	Sw, Hi-Sp, 40V, 200mA, 150mW, 750MHz, B=100..200	MCP	16ta	-	3a	San
ST4	-	2SC4453-4	Si-npn	Sw, Hi-Sp, 40V, 200mA, 200mW, 750MHz, B=100..200	CP	16ta	-	3a	San
STB	-	MCP809M3-4.00	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Nsc
STs	-	BSS139	n-MOSFET	V-MOS, 250V, 40mA, <100Ω, 14/25ns	SOT-23	16fh	-	3a	Sie
SUB	-	MCP809M3-4.38	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Nsc
SV	-	SVC233	C-diode	Dual, FM-band pager, 16V, 50mA, Vf=0.95V(50mA), 0.25pF	CP	16dl	-	3a	San
SVB	-	MCP809M3-4.63	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vda	VD7	3a	Nsc
SW	-	2SC5477	Si-npn	HF, 30V, 50mA, 150mW, 1.1GHz, B~148	SC-59	16ta	-	3a	Ish
SW	-	2SC5626	Si-npn	HF-Amp, 30V, 50mA, 150mW, 1.1GHz, B~148	SOT-323	16ta	-	3a	Ish
SWs	-	BSS138W	n-MOSFET	SIPMOS, LogL, 60V, 280mA, 360mW, 3.5Ω(200mA), 2.2/6.7ns	SOT-323	16fh	-	3c	Inf
SY	-	2SA1162-Y	Si-pnp	GP, AF, 50V, 150mA, 150mW, B=120..240, >80MHz	SOT-23	16ta	-	3a	Tos
SY	-	2SA1586-Y	Si-pnp	GP, AF, 50V, 150mA, 100mW, B=120..240, >70MHz	SOT-323	16ta	-	3a	Tos
SY	-	2SA1832FT-Y	Si-pnp	GP, 50V, 150mA, 100mW, B=120..240, 80MHz	TESM	18ta	-	3a	Tos
SY	-	2SC3900	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, B>100, R1=4.7k	CP	16ta	-	3a	San
SY	-	KTA2014E-Y	Si-pnp	AF, Sw, 50V, 150mA, 100mW, B=120..240, >80MHz	ESM	18ta	-	3f	Kec
SY	-	KTA2014F-Y	Si-pnp	AF, Sw, 50V, 150mA, 100mW, B=120..240, >80MHz	TFSM	19ta	-	3f	Kec
SY	-	KTA2014V-Y	Si-pnp	AF, Sw, 50V, 150mA, 100mW, B=120..240, >80MHz	VSM	18ta	-	3f	Kec
SY	-	KTA2014-Y	Si-pnp	AF, Sw, 50V, 150mA, 100mW, B=120..240, >80MHz	USM	16ta	-	3f	Kec
SZ	-	KTA2012E	Si-pnp	GP, 15V, 500mA, 100mW, B=270..680, 260MHz	ESM	18ta	-	3a	Kec
SZ	-	KTA2012V	Si-pnp	GP, 15V, 500mA, 100mW, B=270..680, 260MHz	VSM	18ta	-	3a	Kec
SZ	-	MAX809SQ400T1G	Vdet-IC	4.0V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Ons
sZC	-	MMBT4124	Si-npn	Sw, 30V, 200mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Sie
sZC	-	SMBT4124	Si-npn	Sw, 30V, 200mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Sie
t	-	AX6903FA	Vdet-IC	2.63V±1.5%, -Reset PPO	SC-70	16vda	VD7	3b	Axl
T	cr	ELM7539NEB	Vdet-IC	3.9V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
T	cs	ELM7539CEB	Vdet-IC	3.9V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
T•Q	-	2SA1603A-Q	Si-pnp	AF, 60V, 150mA, 150mW, 200MHz, B=120..270	SOT-323	16ta	-	3a	Mit
T•R	-	2SA1603A-R	Si-pnp	AF, 60V, 150mA, 150mW, 200MHz, B=180..390	SOT-323	16ta	-	3a	Mit
T•S	-	2SA1603A-S	Si-pnp	AF, 60V, 150mA, 150mW, 200MHz, B=270..560	SOT-323	16ta	-	3a	Mit
T0	-	AP8822C-10GA	Vdet-IC	1.0V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
T0	-	AP8822C-10GT	Vdet-IC	1.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
T0	-	AP8822C-10PA	Vdet-IC	1.0V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
T0	-	AP8822C-10PT	Vdet-IC	1.0V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
T0	-	ELM7640HCB	Vdet-IC	4.0V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
T0	-	ELM9750CBB	Vdet-IC	5.0V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
T0	-	R3130N40HA	Vdet-IC	4V±1.5%, -Reset PPO, 400ms	SOT-23	16vdc	VD7	3b	Ric
t01	-	PDTA143ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3a	NxM
t01	-	PDTA143EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3a	NxM
t02	-	CHDTC143EUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3a	Chm
t02	-	PDTC143ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3a	NxM
t02	-	PDTC143EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3a	NxM
t03	-	PDTA114ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k	SOT-23	16ta	-	3a	NxM
t03	-	PDTA114EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SOT-323	16ta	-	3a	NxM
t04	-	BZX84-A11	Z-diode	11V±1%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
t04	-	PMSS3904	Si-npn	GP, 60V, 100mA, 200mW, B=100..300, >180MHz	SOT-323	16ta	-	3a	PhM
t05	-	PDTA124ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k	SOT-23	16ta	-	3a	NxM
t05	-	PDTA124EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SOT-323	16ta	-	3a	NxM
T05	-	CHT05PT	Si-npn	AF, Sw, 60V, 500mA, B>100, 80MHz	SOT-23	16ta	-	3a	Chm
t06	-	PDTC124EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SOT-323	16ta	-	3a	NxM
t06	-	PMSS3906	Si-pnp	GP, 60V, 100mA, 200mW, B=100..300, >150MHz	SOT-323	16ta	-	3a	PhM
t07	-	PDTA144ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/47k	SOT-23	16ta	-	3a	NxM
t07	-	PDTA144EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SOT-323	16ta	-	3a	NxM
t08	-	PDTC144ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/47k	SOT-23	16ta	-	3a	NxM





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
t08	-	PDTC144EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SOT-323	16ta	-	3a	NxM
t09	-	CHDTC114EUPT	Si-npn-Digi	Sw, 50V, 50mA, 250MHz, R1/R2=10k/10k	SOT-323	16ta	-	3a	Chm
t09	-	PDTC114EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SOT-323	16ta	-	3a	NxM
T1	-	AP8822C-11GA	Vdet-IC	1.1V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
T1	-	AP8822C-11GT	Vdet-IC	1.1V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
T1	-	AP8822C-11PA	Vdet-IC	1.1V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
T1	-	AP8822C-11PT	Vdet-IC	1.1V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
T1	-	BCX17	Si-pnp	AF-Drv, 50V, 500mA, 300mW, B=100..600, >80MHz	SOT-23	16ta	-	3a	Ste
T1	-	BSS63	Si-pnp	GP, 110V, 100mA, 250mW, B>30, >50MHz	SOT-23	16ta	-	3a	Ons
T1	-	BTC5181WC3	Si-npn	HF, 5V, 10mA, 30mW, B=70..140, 12GHz	SOT-23	16ta	-	3a	Cys
T1	-	ELM7641HCB	Vdet-IC	4.1V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
T1	-	ELM9751CBB	Vdet-IC	5.1V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
T1	-	HSMS-2862	Si-diode	Dual, Schottky, 5V, Vf(If=30mA)<0.6V, Ct<0.3pF, Rd=10Ω	SOT-23	16dl	-	3a	Agi
T1	-	R3130N44HA	Vdet-IC	4.4V±1.5%, -Reset PPO, 400ms	SOT-23	16vdc	VD7	3b	Ric
T10	-	BZX84B4V7LT1	Z-diode	4.61..4.79V, Zzt=80Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
T10	-	LBZX84B4V7L	Z-diode	4.55..4.75V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
T10	cn	BZX84B4V7LT1G	Z-diode	4.61..4.79V, Zzt=80Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
T106	-	DTD113ZU	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=1k/10k	UMT3	16ta	-	3a	Rhm
t11	-	PDTA114TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=10k	SOT-23	16ta	-	3a	NxM
t11	-	PDTA115TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=100k	SOT-323	16ta	-	3a	NxM
T11	-	BZX84B5V1LT1	Z-diode	5.0..5.20V, Zzt=60Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
T11	-	LBZX84B5V1L	Z-diode	4.98..5.2V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
T11	cn	BZX84B5V1LT1G	Z-diode	5.0..5.20V, Zzt=60Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
t12	-	PDTA144VU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	SOT-323	16ta	-	3a	NxM
t12	-	PDTC114TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=10k	SOT-23	16ta	-	3a	NxM
T12	-	BZX84B5V6LT1	Z-diode	5.49..5.71V, Zzt=40Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
T12	-	LBZX84B5V6L	Z-diode	5.49..5.73V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
T12	cn	BZX84B5V6LT1G	Z-diode	5.49..5.71V, Zzt=40Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
t13	-	PDTA123YU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	SOT-323	16ta	-	3a	NxM
T13	-	BZX84B6V2LT1	Z-diode	6.08..6.32V, Zzt=10Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
T13	-	LBZX84B6V2L	Z-diode	6.06..6.33V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
T13	cn	BZX84B6V2LT1G	Z-diode	6.08..6.32V, Zzt=10Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
t14	-	PDTA113EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=1k/1k	SOT-323	16ta	-	3a	NxM
T14	-	BZX84B6V8LT1	Z-diode	6.66..6.94V, Zzt=15Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
T14	cn	BZX84B6V8LT1G	Z-diode	6.66..6.94V, Zzt=15Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
T146	-	DTD113ZK	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 200MHz, R1/R2=1k/10k	SOT-346	16ta	-	3a	Rhm
t15	-	PDTA113ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxM
t15	-	PDTC115EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	SOT-323	16ta	-	3a	NxM
T15	-	BZX84B7V5LT1	Z-diode	7.35..7.65V, Zzt=15Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
T15	-	LBZX84B7V5L	Z-diode	7.28..7.6V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
T15	cn	BZX84B7V5LT1G	Z-diode	7.35..7.65V, Zzt=15Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
t16	-	PDTA113ZU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=1k/10k	SOT-323	16ta	-	3a	NxM
t16	-	PDTC114ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k	SOT-23	16ta	-	3a	NxM
T16	-	BZX84B8V2LT1	Z-diode	8.04..8.36V, Zzt=15Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
T16	-	LBZX84B8V2L	Z-diode	8.02..8.36V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
T16	cn	BZX84B8V2LT1G	Z-diode	8.04..8.36V, Zzt=15Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
t17	-	PDTC115TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=100k	SOT-323	16ta	-	3a	NxM
t17	-	PDTC124ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k	SOT-23	16ta	-	3a	NxM
T17	-	BZX84B9V1LT1	Z-diode	8.92..9.28V, Zzt=15Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
T17	-	LBZX84B9V1L	Z-diode	8.85..9.23V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
T17	-	SST4117	n-FET	AF, 40V, 50mA, 300mW, Idss=0.03..0.09mA, Up<1.8V	SOT-23	16fj	-	3a	Cal
T17	cn	BZX84B9V1LT1G	Z-diode	8.92..9.28V, Zzt=15Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
t18	-	PDTC143ZT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k	SOT-23	16ta	-	3a	NxM
t18	-	PDTC144VU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	SOT-323	16ta	-	3a	NxM
T18	-	SST4118	n-FET	AF, 40V, 50mA, 300mW, Idss=0.08..0.24mA, Up<3V	SOT-23	16fj	-	3a	Cal
t19	-	PDTA143ZT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k	SOT-23	16ta	-	3a	NxM
t19	-	PDTC123YU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	SOT-323	16ta	-	3a	NxM
T19	-	BZX84B16LT1	Z-diode	15.68..16.32V, Zzt=40Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
T19	-	LBZX84B16L	Z-diode	15.85..16.51V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
T19	-	SST4119	n-FET	AF, 40V, 50mA, 300mW, Idss=0.2..0.6mA, Up<6V	SOT-23	16fj	-	3a	Cal
T19	-	TK71519S	LVR-IC	LDO, 1.9V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
T19	cn	BZX84B16LT1G	Z-diode	15.68..16.32V, Zzt=40Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
t1A	-	PMBT3904	Si-npn	Sw, 60V, 100mA, 250mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	PhM
t1A	-	PMMT3904	Si-npn	GP, 60V, 200mA, 350mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	Phi
t1A	-	PMST3904	Si-npn	GP, 60V, 200mA, 200mW, B=60..300, >300MHz	SOT-323	16ta	-	3a	PhM
t1B	-	PMBT2222	Si-npn	Sw, 60V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	PhH
t1B	-	PMST2222	Si-npn	Sw, 60V, 600mA, 200mW, B=120..300, >300MHz	SOT-23	16ta	-	3a	PhM
t1D	-	PMBTA42	Si-npn	Vid, 300/300V, 100mA, 250mW, B>25, >50MHz	SOT-23	16ta	-	3a	PhH
t1D	-	PMSTA42	Si-npn	Vid, 300/300V, 100mA, 200mW, B>25, >50MHz	SOT-323	16ta	-	3a	PhM
t1E	-	PMBTA43	Si-npn	Vid, 200/200V, 100mA, 250mW, B>25, >50MHz	SOT-23	16ta	-	3a	PhH

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
t1E	-	PMSTA43	Si-npn	Vid, 200/200V, 100mA, 200mW, B>25, >50MHz	SOT-323	16ta	-	3a	PhM
t1F	-	PMBT5550	Si-npn	HV, 160V, 300mA, 250mW, B=60..250, 100..300MHz	SOT-23	16ta	-	3a	PhH
t1F	-	PMST5550	Si-npn	HV, 160V, 300mA, 200mW, B=60..250, 100..300MHz	SOT-323	16ta	-	3a	PhM
t1G	-	PMBTA06	Si-npn	GP, 80V, 500mA, 250mW, B>100, >100MHz	SOT-23	16ta	-	3a	PhH
t1G	-	PMMTA06	Si-npn	GP, 80V, 500mA, 350mW, B>100, >100MHz	SOT-23	16ta	-	3a	Phi
t1G	-	PMSTA06	Si-npn	GP, 80V, 500mA, 200mW, B>50, >100MHz	SOT-323	16ta	-	3a	PhM
t1H	-	MMBTA05	Si-npn	GP, 60V, 500mA, 350mW, B>100, >100MHz	SOT-323	16ta	-	3a	Phi
t1H	-	PMBTA05	Si-npn	GP, 60V, 500mA, 250mW, B>100, >100MHz	SOT-23	16ta	-	3a	PhH
t1H	-	PMSTA05	Si-npn	GP, 60V, 500mA, 200mW, B>50, >100MHz	SOT-323	16ta	-	3a	PhM
t1J	-	PMBT2369	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120, >500MHz	SOT-23	16ta	-	3a	PhH
t1J	-	PMST2369	Si-npn	Sw, 40V, 200mA, 200mW, B=40..120, >500MHz	SOT-323	16ta	-	3a	PhM
t1K	-	PMBT6428	Si-npn	GP, AF, 60V, 100mA, 250mW, B>250..650, 100..700MHz	SOT-23	16ta	-	3a	PhH
t1K	-	PMST6428	Si-npn	GP, Hi-beta, 60V, 100mA, 200mW, B=250..650, 100..700MHz	SOT-323	16ta	-	3a	PhM
t1L	-	PMBT6429	Si-npn	GP, AF, 55V, 100mA, 250mW, B>500..1250, 100..700MHz	SOT-23	16ta	-	3a	PhH
t1L	-	PMST6429	Si-npn	GP, Hi-beta, 55V, 100mA, 200mW, B=250..650, 100..700MHz	SOT-323	16ta	-	3a	PhM
t1M	-	PMBTA13	Si-npn-Darl	GP, 30V, 500mA, 250mW, B>5000, >125MHz	SOT-23	16ta	-	3a	PhH
t1N	-	PMBTA14	Si-npn-Darl	GP, 30V, 500mA, 250mW, B>10000, >125MHz	SOT-23	16ta	-	3a	PhH
t1P	-	PMBT2222A	Si-npn	Sw, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	PhH
t1P	-	PMST2222A	Si-npn	Sw, 75V, 600mA, 200mW, B=120..300, >300MHz	SOT-323	16ta	-	3a	PhM
T1p	-	BCX17	Si-pnp	AF-Drv, 50V, 500mA, 250mW, B=100..600, >80MHz	SOT-23	16ta	-	3a	PhH
t1Q	-	PMBT5088	Si-npn	GP, AF, 30V, 200mA, 325mW, B>500, 160MHz	SOT-23	16ta	-	3a	PhH
t1Q	-	PMST5088	Si-npn	GP, 35V, 100mA, 200mW, B=300..900, >100MHz	SOT-323	16ta	-	3a	PhM
t1R	-	PMST5089	Si-npn	GP, 30V, 100mA, 200mW, B=400..1200, >100MHz	SOT-323	16ta	-	3a	PhM
t1S	-	PDTA123TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=2.2k	SOT-323	16ta	-	3a	NxM
t1T	-	PDTC123TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=2.2k	SOT-323	16ta	-	3a	NxM
t1T	-	PDTD123TT	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1=2.2k	SOT-23	16ta	-	3a	NxM
T1t	-	BCX17	Si-pnp	AF-Drv, 50V, 500mA, 250mW, B=100..600, >80MHz	SOT-23	16ta	-	3a	PhM
t1U	-	PDTB123TT	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1=2.2k	SOT-23	16ta	-	3a	NxM
T1W	-	BCX17	Si-pnp	AF-Drv, 50V, 500mA, 250mW, B=100..600, >80MHz	SOT-23	16ta	-	3a	PhC
T2	-	2SK242-2	n-FET	AF-Amp, 20V, 20mA, 250mW, Idss=0.6..1.5mA, Ciss=4pF	SOT-23	16fi	-	3a	San
T2	-	AP8822C-12GA	Vdet-IC	1.2V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
T2	-	AP8822C-12GT	Vdet-IC	1.2V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
T2	-	AP8822C-12PA	Vdet-IC	1.2V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
T2	-	AP8822C-12PT	Vdet-IC	1.2V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
T2	-	ELM7642HCB	Vdet-IC	4.2V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
T2	-	ELM9752CBB	Vdet-IC	5.2V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
T2	-	R3130N26HA3	Vdet-IC	2.6V±1.5%, -Reset PPO, 400ms	SOT-23	16vdc	VD7	3b	Ric
t20	-	PDTC144WT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/22k	SOT-23	16ta	-	3a	NxM
t20	-	PDTC144WU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	SOT-323	16ta	-	3a	NxM
T20	-	BZX84B18LT1	Z-diode	17.64..18.36V, Zzt=45Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
T20	-	LBZX84B18L	Z-diode	17.56..18.35V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
T20	-	TK71520S	LVR-IC	LDO, 2.0V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
T20	cn	BZX84B18LT1G	Z-diode	17.64..18.36V, Zzt=45Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
t21	-	PDTA123ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxM
T21	-	TK71521S	LVR-IC	LDO, 2.1V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
T22	-	TK71522S	LVR-IC	LDO, 2.2V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t23	-	PDTA114TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=10k	SOT-323	16ta	-	3a	NxM
t23	-	PDTA123JT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k	SOT-23	16ta	-	3a	NxM
T23	-	TK71523S	LVR-IC	LDO, 2.3V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t24	-	PDTC114TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=10k	SOT-323	16ta	-	3a	NxM
T24	-	TK71524S	LVR-IC	LDO, 2.4V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
T25	-	TK71525S	LVR-IC	LDO, 2.5V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t26	-	PDTC123ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxM
t26	-	PDTC123JT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k	SOT-23	16ta	-	3a	NxM
T26	-	TK71526S	LVR-IC	LDO, 2.6V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t27	-	PDTC114YT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k	SOT-23	16ta	-	3a	NxM
T27	-	TK71527S	LVR-IC	LDO, 2.7V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t28	-	PDTA144WU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	SOT-323	16ta	-	3a	NxM
T28	-	TK71528S	LVR-IC	LDO, 2.8V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t29	-	PDTA114YT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k	SOT-23	16ta	-	3a	NxM
T29	-	TK71529S	LVR-IC	LDO, 2.9V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t2A	-	PMBT3906	Si-pnp	Sw, 40V, 100mA, 250mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	PhM
t2A	-	PMST3906	Si-pnp	GP, 60V, 100mA, 200mW, B=60..300, >250MHz	SOT-323	16ta	-	3a	PhM
t2B	-	PMBT2907	Si-pnp	GP, 40V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	PhH
t2D	-	PMBTA92	Si-pnp	Vid, 300/300V, 500mA, 250mW, B=25, >50MHz	SOT-23	16ta	-	3a	PhH
t2D	-	PMSTA92	Si-pnp	Vid, 300/300V, 100mA, 200mW, B=40, >50MHz	SOT-323	16ta	-	3a	PhM
t2E	-	PMBTA93	Si-pnp	Vid, 200/200V, 500mA, 250mW, B=25, >50MHz	SOT-23	16ta	-	3a	PhH
t2E	-	PMSTA93	Si-pnp	Vid, 200/200V, 500mA, 330mW, B=25, >50MHz	SOT-323	16ta	-	3a	PhM
t2F	-	PMBT2907A	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	PhH
t2F	-	PMST2907A	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-323	16ta	-	3a	PhM



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
t2G	-	PMBTA56	Si-pnp	AF-Drv, 80V, 500mA, 250mW, B>100, >50MHz	SOT-23	16ta	-	3a	PhH
t2G	-	PMSTA56	Si-pnp	AF-Drv, 80V, 500mA, 200mW, B>100, >50MHz	SOT-323	16ta	-	3a	PhM
t2H	-	PMBTA55	Si-pnp	AF-Drv, 60V, 500mA, 250mW, B>100, >50MHz	SOT-23	16ta	-	3a	PhH
t2H	-	PMSTA55	Si-pnp	AF-Drv, 60V, 500mA, 200mW, B>100, >50MHz	SOT-323	16ta	-	3a	PhM
t2L	-	PMBT5401	Si-pnp	HV, 160V, 300mA, 250mW, B=60..240, 100..300MHz	SOT-23	16ta	-	3a	PhH
t2L	-	PMST5401	Si-pnp	HV, 160V, 300mA, 200mW, B=60..240, 100..300MHz	SOT-323	16ta	-	3a	PhM
T2p	-	BCX18	Si-pnp	GP, 30V, 500mA, 250mW, B=100..600, >80MHz	SOT-23	16ta	-	3a	PhH
t2T	-	PMBT4403	Si-pnp	Sw, 40V, 600mA, 250mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	PhM
t2T	-	PMST4403	Si-pnp	GP, 40V, 600mA, 200mW, B=100..300, >200MHz	SOT-323	16ta	-	3a	PhM
T2t	-	BCX18	Si-pnp	GP, 30V, 500mA, 250mW, B=100..600, >80MHz	SOT-23	16ta	-	3a	PhM
t2U	-	PMBTA63	Si-pnp-Darl	GP, 30V, 500mA, 250mW, B>5000, >125MHz	SOT-23	16ta	-	3a	PhH
t2V	-	PMBTA64	Si-pnp-Darl	GP, 30V, 500mA, 250mW, B>10000, >125MHz	SOT-23	16te	-	3a	PhH
T2W	-	BCX18	Si-pnp	GP, 30V, 500mA, 250mW, B=100..600, >80MHz	SOT-23	16ta	-	3a	PhC
t2X	-	PMBT4401	Si-npn	Sw, 60V, 600mA, 250mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	PhM
t2X	-	PMST4401	Si-npn	Sw, 60V, 600mA, 200mW, B=100..300, >250MHz	SOT-323	16ta	-	3a	PhM
T3	-	2SK1065-3	n-FET	GP, 20V, 20mA, 100mW, Idss=1.2..3mA, Up<2.5V	MCP	16fa	-	3a	San
T3	-	2SK242-3	n-FET	AF-Amp, 20V, 20mA, 250mW, Idss=1.2..3mA, Ciss=4pF	SOT-23	16fi	-	3a	San
T3	-	AP8822C-13GA	Vdet-IC	1.3V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
T3	-	AP8822C-13GT	Vdet-IC	1.3V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
T3	-	AP8822C-13PA	Vdet-IC	1.3V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
T3	-	AP8822C-13PT	Vdet-IC	1.3V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
T3	-	BAS21T	Si-diode	Sw, Fast, 250V, 250mA, 250mW, <50ns	SOT-416	16dc	-	3a	Di
T3	-	BSS63	Si-pnp	GP, 110V, 100mA, 200mW, B>30, >50MHz	SOT-23	16te	-	3a	Ste
T3	-	ELM7643HCB	Vdet-IC	4.3V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
T3	-	ELM9753CBB	Vdet-IC	5.3V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
T3	-	HSMS-2863	Si-diode	Dual, Schottky, 5V, Vf(If=30mA)<0.6V, Ct<0.3pF, Rd=10Ω	SOT-23	16df	-	3a	Agi
T3	-	HVM16	C-diode	Dual, FM-Tuning, 14V, 24.6/43pF(8..2V/1MHz)	SOT-23	16dg	-	3a	Ren
T3	-	R3130N29HA3	Vdet-IC	2.9V±1.5%, -Reset PPO, 400ms	SOT-23	16vdc	VD7	3b	Ric
t30	-	PDTC114YU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	SOT-323	16ta	-	3a	NxM
T30	-	TK71530S	LVR-IC	LDO, 3.0V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t31	-	PDTA143XT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k	SOT-23	16ta	-	3a	NxM
T31	-	TK71531S	LVR-IC	LDO, 3.1V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t32	-	PDTC143XT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k	SOT-23	16ta	-	3a	NxM
T32	-	2SC2757-32	Si-npn	RF-amp, 15V, 50mA, 150mW, B=60..120, 800MHz	SOT-23	16ta	-	3a	Nec
T32	-	2SC4182-32	Si-npn	UHF/VHF-Osc, Mix, 30V, 50mA, 160mW, B=60..105, 1.1GHz	SOT-323	16ta	-	3a	Nec
T32	-	TK71532S	LVR-IC	LDO, 3.2V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t33	-	PDTC143TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k	SOT-23	16ta	-	3a	NxM
T33	-	2SC2757-33	Si-npn	RF-amp, 15V, 50mA, 150mW, B=90..180, 800MHz	SOT-23	16ta	-	3a	Nec
T33	-	2SC4182-33	Si-npn	UHF/VHF-Osc, Mix, 30V, 50mA, 160mW, B=85..150, 1.1GHz	SOT-323	16ta	-	3a	Nec
T33	-	TK71533S	LVR-IC	LDO, 3.3V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
T34	-	2SC2757-34	Si-npn	RF-amp, 15V, 50mA, 150mW, B=120..240, 800MHz	SOT-23	16ta	-	3a	Nec
T34	-	2SC4182-34	Si-npn	UHF/VHF-Osc, Mix, 30V, 50mA, 160mW, B=120..220, 1.1GHz	SOT-323	16ta	-	3a	Nec
T34	-	TK71534S	LVR-IC	LDO, 3.4V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
T35	-	BSR20	Si-pnp	HF/Sw, 130V, 300mA, 250mW, B=40..180, 400MHz	SOT-23	16ta	-	3a	Phi
T35	-	TK71535S	LVR-IC	LDO, 3.5V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
T36	-	BSR20A	Si-pnp	Sw, 160V, 600mA, 250mW, B=60..240, 300MHz	SOT-23	16ta	-	3a	Phi
T36	-	TK71536S	LVR-IC	LDO, 3.6V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
T37	-	TK71537S	LVR-IC	LDO, 3.7V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
T38	-	TK71538S	LVR-IC	LDO, 3.8V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
T39	-	TK71539S	LVR-IC	LDO, 3.9V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
T4	-	2SK1065-4	n-FET	GP, 20V, 20mA, 100mW, Idss=2.5..6mA, Up<2.5V	MCP	16fa	-	3a	San
T4	-	2SK242-4	n-FET	AF-Amp, 20V, 20mA, 250mW, Idss=2.5..6mA, Ciss=4pF	SOT-23	16fi	-	3a	San
T4	-	AP8822C-14GA	Vdet-IC	1.4V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
T4	-	AP8822C-14GT	Vdet-IC	1.4V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
T4	-	AP8822C-14PA	Vdet-IC	1.4V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
T4	-	AP8822C-14PT	Vdet-IC	1.4V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
T4	-	BCX17R	Si-pnp	AF-Drv, 50V, 500mA, 250mW, B=100..600, >80MHz	SOT-23	16te	-	3a	Zx
T4	-	ELM7644HCB	Vdet-IC	4.4V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
T4	-	ELM9754CBB	Vdet-IC	5.4V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
T4	-	HSMS-2864	Si-diode	Dual, Schottky, 5V, Vf(If=30mA)<0.6V, Ct<0.3pF, Rd=10Ω	SOT-23	16dg	-	3a	Agi
T4	-	HVM11	C-diode	UHF/SHF-Tuning, 35V, 3.6..5.6pF(1V)	SOT-23	16dc	-	3a	Ren
T4	-	KA4L4K	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=47k/10k	SOT-416	16ta	-	3a	Nec
T4	-	R3130N30HA8	Vdet-IC	3V±1.5%, -Reset PPO, 400ms	SOT-23	16vdc	VD7	3b	Ric
T4	-	SP809EK-4-4	Vdet-IC	4.4V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Sip
T40	-	TK71540S	LVR-IC	LDO, 4.0V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t41	-	PDTC144TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=47k	SOT-23	16ta	-	3a	NxM
t41	-	PDTC144TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=47k	SOT-323	16ta	-	3a	NxM
T41	-	TK71541S	LVR-IC	LDO, 4.1V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t42	-	PDTA123EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	SOT-323	16ta	-	3a	NxM
t42	-	PDTA143TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k	SOT-23	16ta	-	3a	NxM



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T42	-	2SC3545-M	Si-npn	UHF/RF, Osc/Mix, 30V, 50mA, 150mW, 2GHz, B=50..100	SOT-23	16ta	-	3a	Nec
T42	-	2SC3545-P	Si-npn	UHF/RF, Osc/Mix, 30V, 50mA, 150mW, 2GHz, B=50..100	SOT-23	16ta	-	3a	Nec
T42	-	2SC4184-42	Si-npn	UHF/VHF-Osc, Mix, 30V, 50mA, 160mW, B=40..80, 1.8GHz	SOT-323	16ta	-	3a	Nec
T42	-	TK71542S	LVR-IC	LDO, 4.2V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t43	-	PDTA123JU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	SOT-323	16ta	-	3a	NxM
t43	-	PDTA144WT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/22k	SOT-23	16ta	-	3a	NxM
T43	-	2SC3545-L	Si-npn	UHF/RF, Osc/Mix, 30V, 50mA, 150mW, 2GHz, B=70..140	SOT-23	16ta	-	3a	Nec
T43	-	2SC3545-Q	Si-npn	UHF/RF, Osc/Mix, 30V, 50mA, 150mW, 2GHz, B=70..140	SOT-23	16ta	-	3a	Nec
T43	-	2SC4184-43	Si-npn	UHF/VHF-Osc, Mix, 30V, 50mA, 160mW, B=60..120, 1.8GHz	SOT-323	16ta	-	3a	Nec
T43	-	TK71543S	LVR-IC	LDO, 4.3V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t44	-	PDTC115ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k	SOT-23	16ta	-	3a	NxM
T44	-	2SC3545-K	Si-npn	UHF/RF, Osc/Mix, 30V, 50mA, 150mW, 2GHz, B=120..250	SOT-23	16ta	-	3a	Nec
T44	-	2SC3545-R	Si-npn	UHF/RF, Osc/Mix, 30V, 50mA, 150mW, 2GHz, B=120..250	SOT-23	16ta	-	3a	Nec
T44	-	2SC4184-44	Si-npn	UHF/VHF-Osc, Mix, 30V, 50mA, 160mW, B=100..200, 1.8GHz	SOT-323	16ta	-	3a	Nec
T44	-	CHT44PT	Si-npn	Vid, 400V, 300mA, B=50..240, 50MHz	SOT-23	16ta	-	3a	Chm
T44	-	TK71544S	LVR-IC	LDO, 4.4V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t45	-	PDTA143TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=4.7k	SOT-323	16ta	-	3a	NxM
t45	-	PDTC124TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=22k	SOT-23	16ta	-	3a	NxM
T45	-	TK71545S	LVR-IC	LDO, 4.5V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t46	-	PDTA143XU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	SOT-323	16ta	-	3a	NxM
t46	-	PDTC124XT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k	SOT-23	16ta	-	3a	NxM
T46	-	TK71546S	LVR-IC	LDO, 4.6V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t47	-	PDTA124XT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k	SOT-23	16ta	-	3a	NxM
t47	-	PDTA143ZU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	SOT-323	16ta	-	3a	NxM
T47	-	TK71547S	LVR-IC	LDO, 4.7V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t48	-	PDTC123EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	SOT-323	16ta	-	3a	NxM
t48	-	PDTC123JU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	SOT-323	16ta	-	3a	NxM
T48	-	TK71548S	LVR-IC	LDO, 4.8V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
T49	-	TK71549S	LVR-IC	LDO, 4.9V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t4F	-	PMBD353	Si-diode	Dual, Schottky Barrier, 4V, 30mA, Vf<600mV(10mA), <1pF	SOT-23	16ea	-	3a	PhM
T5	-	1SV153A	C-diode	VHF/UHF-Tuning, 35V, 2.11/2.43pF, <0.55Ω(470MHz)	SOT-23	16dr	-	3a	Nec
T5	-	2SK1065-5	n-FET	GP, 20V, 20mA, 100mW, Idss=5..12mA, Up<2.5V	MCP	16fa	-	3a	San
T5	-	2SK242-5	n-FET	AF-Amp, 20V, 20mA, 250mW, Idss=5..12mA, Ciss=4pF	SOT-23	16fi	-	3a	San
T5	-	AP8822C-15GA	Vdet-IC	1.5V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
T5	-	AP8822C-15GT	Vdet-IC	1.5V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
T5	-	AP8822C-15PA	Vdet-IC	1.5V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
T5	-	AP8822C-15PT	Vdet-IC	1.5V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
T5	-	BCX18R	Si-pnp	GP, 30V, 500mA, 250mW, B=100..600, >80MHz	SOT-23	16te	-	3a	Zx
T5	-	ELM7645HCB	Vdet-IC	4.5V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
T5	-	ELM9755CBB	Vdet-IC	5.5V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
T5	-	HVM27WK	C-diode	Dual, FM-Tuning, 20V, 24/52pF(8..1V/1MHz)	SOT-23	16dg	-	3a	Ren
T5	-	R3130N46HA5	Vdet-IC	4.6V±1.5%, -Reset PPO, 400ms	SOT-23	16vdc	VD7	3b	Ric
t50	-	BZX84-A2V4	Z-diode	2.4V±1%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
t50	-	PDTC124TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=22k	SOT-323	16ta	-	3a	NxM
T50	-	TK71550S	LVR-IC	LDO, 5.0V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t51	-	BZX84-A2V7	Z-diode	2.7V±1%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
t51	-	PDTC124XU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	SOT-323	16ta	-	3a	NxM
t52	-	BZX84-A3V0	Z-diode	3.0V±1%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
t52	-	PDTC143TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=4.7k	SOT-323	16ta	-	3a	NxM
t53	-	PDTC143XU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	SOT-323	16ta	-	3a	NxM
t54	-	PDTC143ZU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	SOT-323	16ta	-	3a	NxM
t55	-	BZX84-A3V9	Z-diode	3.9V±1%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
t55	-	PDTA114YU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	SOT-323	16ta	-	3a	NxM
T55	-	CHT55PT	Si-pnp	AF, Sw, 60V, 500mA, B>100, 50MHz	SOT-23	16ta	-	3a	Chm
t56	-	BZX84-A4V3	Z-diode	4.3V±1%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
t57	-	BZX84-A4V7	Z-diode	4.7V±1%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
t58	-	BZX84-A5V1	Z-diode	5.1V±1%, Zzt=60Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
t59	-	BZX84-A5V6	Z-diode	5.6V±1%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
t5A	-	PMBD6050	Si-diode	Sw, Hi-sp, 75V, 215mA, Vf<1.25V(150mA), <4ns	SOT-23	16dc	-	3a	PhM
t5B	-	PMBD6100	Si-diode	Dual, Sw, Hi-sp, 70V, 215mA, Vf<1.1V(100mA), <4ns	SOT-23	16dg	-	3a	PhM
t5C	-	PMBD7000	Si-diode	Dual, Sw, Hi-sp, 100V, 215mA, Vf<1.25V(150mA), <4ns	SOT-23	16dl	-	3a	PhM
t5D	-	PMBD914	Si-diode	Sw, Fast, 70V, 215mA, 250mW, <4ns	SOT-23	16dc	-	3a	PhM
T6	-	AP8822C-16GA	Vdet-IC	1.6V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
T6	-	AP8822C-16GT	Vdet-IC	1.6V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
T6	-	AP8822C-16PA	Vdet-IC	1.6V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
T6	-	AP8822C-16PT	Vdet-IC	1.6V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
T6	-	BSS63	Si-pnp	GP, 110V, 100mA, 200mW, B>30, >50MHz	SOT-23	16ta	-	3f	Kec
T6	-	BSS63R	Si-pnp	GP, 110V, 100mA, 200mW, B>30, >50MHz	SOT-23	16te	-	3a	Zx
T6	-	ELM7646HCB	Vdet-IC	4.6V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
T6	-	HVM17	C-diode	Dual, FM-Tuning, 15V, 50/85pF(1V)	SOT-23	16dg	-	3a	Ren



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
t60	-	BZX84-A6V2	Z-diode	6.2V±1%, Zzt=10Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
T60	-	TK71560S	LVR-IC	LDO, 6.0V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t61	-	BZX84-A6V8	Z-diode	6.8V±1%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
T61	-	ZUMT617	Si-npn	Sw, Lo-sat, 15V, 1.5A, 180MHz	SOT-323	16ta	-	3a	Zx
t62	-	BZX84-A7V5	Z-diode	7.5V±1%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
T62	-	2SC3841-62	Si-npn	UHF-Mix, Osc, 25V, 30mA, 200mW, B=40..80, 4GHz	SOT-23	16ta	-	3a	Nec
T62	-	2SC3841-P	Si-npn	UHF-Mix, Osc, 25V, 30mA, 200mW, B=40..80, 4GHz	SOT-23	16ta	-	3a	Nec
T62	-	2SC4186-62	Si-npn	UHF-Mix, 25V, 30mA, 150mW, B=40..80, 4GHz	SOT-323	16ta	-	3a	Nec
T62	-	ZUMT618	Si-npn	Sw, Lo-sat, 20V, 1.25A, 210MHz	SOT-323	16ta	-	3a	Zx
t63	-	BZX84-A8V2	Z-diode	8.2V±1%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
T63	-	2SC3841-63	Si-npn	UHF-Mix, Osc, 25V, 30mA, 200mW, B=60..120, 4GHz	SOT-23	16ta	-	3a	Nec
T63	-	2SC3841-Q	Si-npn	UHF-Mix, Osc, 25V, 30mA, 200mW, B=60..120, 4GHz	SOT-23	16ta	-	3a	Nec
T63	-	2SC4186-63	Si-npn	UHF-Mix, 25V, 30mA, 150mW, B=60..120, 4GHz	SOT-323	16ta	-	3a	Nec
T63	-	ZUMT619	Si-npn	Sw, Lo-sat, 50V, 1A, 215MHz	SOT-323	16ta	-	3a	Zx
t64	-	BZX84-A9V1	Z-diode	9.1V±1%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
T64	-	2SC3841-64	Si-npn	UHF-Mix, Osc, 25V, 30mA, 200mW, B=100..200, 4GHz	SOT-23	16ta	-	3a	Nec
T64	-	2SC3841-R	Si-npn	UHF-Mix, Osc, 25V, 30mA, 200mW, B=100..200, 4GHz	SOT-23	16ta	-	3a	Nec
T64	-	2SC4186-64	Si-npn	UHF-Mix, 25V, 30mA, 150mW, B=100..200, 4GHz	SOT-323	16ta	-	3a	Nec
t65	-	BZX84-A10	Z-diode	10V±1%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
t66	-	BZX84-B10	Z-diode	10V±2.5%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
t67	-	BZX84-A12	Z-diode	12V±1%, Zzt=25Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
t69	-	BZX84-A15	Z-diode	15V±1%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
t6D	-	2PD601AQW	Si-npn	GP, Sw, 60V, 100mA, 200mW, B=160..260, >100MHz	SOT-323	16ta	-	3a	PhM
t6E	-	2PD601ARW	Si-npn	GP, Sw, 60V, 100mA, 200mW, B=210..340, >120MHz	SOT-323	16ta	-	3a	PhM
t6F	-	2PD601ASW	Si-npn	GP, Sw, 60V, 100mA, 200mW, B=290..460, >140MHz	SOT-323	16ta	-	3a	PhM
T7	-	AP8822C-17GA	Vdet-IC	1.7V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
T7	-	AP8822C-17GT	Vdet-IC	1.7V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
T7	-	AP8822C-17PA	Vdet-IC	1.7V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
T7	-	AP8822C-17PT	Vdet-IC	1.7V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
T7	-	BSR15	Si-pnp	HF/Sw, 60V, 600mA, 250mW, B=100..300, 200MHz	SOT-23	16ta	-	3a	Ste
T7	-	ELM7647HCB	Vdet-IC	4.7V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
T7	-	KN4L4K	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1/R2=47k/10k	SOT-416	16ta	-	3a	Nec
T7	-	SST4117	n-FET	AF, 40V, 50mA, 300mW, Idss=0.03..0.09mA, Up<1.8V	SOT-23	16fj	-	3a	Six
t70	-	BZX84-B16	Z-diode	16V±2.5%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
T70	-	TK71570S	LVR-IC	LDO, 7V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
t71	-	BZX84-B18	Z-diode	18V±2.5%, Zzt=45Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
T71	-	BSR15R	Si-npn	HF/Sw, 60V, 600mA, 250mW, B=100..300, 200MHz	SOT-23	16te	-	3a	Ste
T71	-	ZUMT717	Si-pnp	Sw, Lo-sat, 12V, 1.25A, 220MHz	SOT-323	16ta	-	3a	Zx
t72	-	BZX84-B20	Z-diode	20V±2.5%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
T72	-	2SC4568-72	Si-npn	UHF-Mix/Osc, 20V, 30mA, B=40..80, 5.5GHz	SOT-23	16ta	-	3a	Nec
T72	-	2SC4570-72	Si-npn	VHF/UHF, 20V, 30mA, 120mW, B=40..80, 5.5GHz	SOT-323	16ta	-	3a	Nec
T72	-	ZUMT718	Si-pnp	Sw, Lo-sat, 20V, 1A, 0.5W, 210MHz	SOT-323	16ta	-	3a	Zx
t73	-	BZX84-B22	Z-diode	22V±2.5%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
T73	-	2SC4568-73	Si-npn	UHF-Mix/Osc, 20V, 30mA, B=60..120, 5.5GHz	SOT-23	16ta	-	3a	Nec
T73	-	2SC4570-73	Si-npn	VHF/UHF, 20V, 30mA, 120mW, B=60..120, 5.5GHz	SOT-323	16ta	-	3a	Nec
T73	-	ZUMT720	Si-pnp	Sw, Lo-sat, 40V, 0.75A, 220MHz	SOT-323	16ta	-	3a	Zx
t74	-	BZX84-B24	Z-diode	24V±2.5%, Zzt=70Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
T74	-	2SC4568-74	Si-npn	UHF-Mix/Osc, 20V, 30mA, B=100..200, 5.5GHz	SOT-23	16ta	-	3a	Nec
T74	-	2SC4570-74	Si-npn	VHF/UHF, 20V, 30mA, 120mW, B=100..200, 5.5GHz	SOT-323	16ta	-	3a	Nec
t75	-	BZX84-A27	Z-diode	27V±1%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
T75	-	2SC4569-75	Si-npn	UHF, TV-tun/Osc/Mix, 20V, 60mA, 150mW, 5GHz, B=40..80	SOT-23	16ta	-	3a	Nec
T75	-	2SC4571-75	Si-npn	UHF-Mix/Osc, 20V, 60mA, B=40-80, 5GHz	SOT-323	16ta	-	3a	Nec
T76	-	2SC4569-76	Si-npn	UHF, TV-tun/Osc/Mix, 20V, 60mA, 150mW, 5GHz, B=60..120	SOT-23	16ta	-	3a	Nec
T76	-	2SC4571-76	Si-npn	UHF-Mix/Osc, 20V, 60mA, B=60-120, 5GHz	SOT-323	16ta	-	3a	Nec
t77	-	PDTA124XU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	SOT-323	16ta	-	3a	NxM
T77	-	2SC4569-77	Si-npn	UHF, TV-tun, Osc/Mix, 20V, 60mA, 150mW, 5GHz, B=100..200	SOT-23	16ta	-	3a	Nec
t7A	-	PDTA144TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=47k	SOT-323	16ta	-	3a	NxM
t7B	-	PDTA124TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=22k	SOT-323	16ta	-	3a	NxM
t7C	-	PDTA115EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	SOT-323	16ta	-	3a	NxM
t7G	-	PBRN113ET	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxM
t7H	-	PBRP123ET	Si-pnp-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxM
t7J	-	PBRN123ET	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxM
t7K	-	PBRP113ET	Si-pnp-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxM
t7L	-	PBRN113ZT	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxM
t7M	-	PBRP113ZT	Si-pnp-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxM
t7P	-	PBRN123YT	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxM
T7p	-	BSR15	Si-pnp	HF/Sw, 60V, 600mA, 250mW, B=100..300, 200MHz	SOT-23	16ta	-	3a	Phi
t7Q	-	PBRP123YT	Si-pnp-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxM
t7R	-	PDTD113ET	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxM
t7S	-	PDTB123ET	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxM



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
t7T	-	PDTD123ET	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxM
t7U	-	PDTB113ET	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxM
t7V	-	PDTD113ZT	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxM
t7W	-	PDTB113ZT	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxM
t7X	-	PDTD123YT	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxM
t7Y	-	PDTB123YT	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxM
T8	-	AP8822C-18GA	Vdet-IC	1.8V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
T8	-	AP8822C-18GT	Vdet-IC	1.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
T8	-	AP8822C-18PA	Vdet-IC	1.8V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
T8	-	AP8822C-18PT	Vdet-IC	1.8V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
T8	-	BSR16	Si-pnp	Sw, 60V, 600mA, 250mW, B100..300, 200MHz	SOT-23	16ta	-	3a	Cdi
T8	-	ELM7648HCB	Vdet-IC	4.8V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
T8	-	HVM25	C-diode	Dual, FM-Tuning, 16V, 36/45pF(3V)	SOT-23	16dg	-	3a	Ren
T8	-	SST4118	n-FET	AF, 40V, 50mA, 300mW, Idss=0.08..0.24mA, Up<3V	SOT-23	16fj	-	3a	Six
T80	-	TK71580S	LVR-IC	LDO, 8V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
T81	-	BSR16R	Si-pnp	Sw, 60V, 600mA, 250mW, B100..300, 200MHz	SOT-23	16te	-	3a	Phi
T82	-	2SC4954	Si-npn	UHF/SHF, 9V, 10mA, 60mW, B=75..150, 12GHz	SOT-23	16ta	-	3a	Nec
T82	-	2SC4958	Si-npn	LN, HF, 9V, 10mA, 60mW, B=75..150, 12GHz	SOT-323	16ta	-	3a	Nec
T83	-	2SC4955	Si-npn	UHF/SHF, 9V, 30mA, 100mW, B=75..150, 12GHz	SOT-23	16ta	-	3a	Nec
T84	-	2SC5177	Si-npn	UHF, LN, 5V, 10mA, 30mW, B=70..140, 13GHz	SC-59	16ta	-	3a	Nec
T84	-	2SC5177-FB	Si-npn	µWave, LN, 5V, 10mA, 30mW, B=70..140, 13GHz	SC-59	16ta	-	3a	Nec
T84	-	2SC5179-FB	Si-npn	µWave, LN, 5V, 10mA, 30mW, B=70..140, 13GHz	SOT-323	16ta	-	3a	Nec
t86	-	BZX84-A75	Z-diode	75V±1%, Zzt=250Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxM
T86	-	2SC5182-FB	Si-npn	µWave, LN, 5V, 30mA, 90mW, B=70..140, 12GHz	SC-59	16ta	-	3a	Nec
T86	-	2SC5184-FB	Si-npn	µWave, LN, 5V, 30mA, 90mW, B=70..140, 13GHz	SOT-323	16ta	-	3a	Nec
T88	-	2SC5191-FB	Si-npn	µWave, LN, 9V, 100mA, 200mW, B=80..160, 4.5GHz	SOT-23	16ta	-	3a	Nec
T88	-	2SC5193-FB	Si-npn	µWave, LN, 9V, 100mA, 150mW, B=80..160, 4.5GHz	SOT-23	16ta	-	3a	Nec
t8A	-	PMBZ5226B	Z-diode	3.3V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8B	-	PMBZ5227B	Z-diode	3.6V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8C	-	PMBZ5228B	Z-diode	3.9V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8D	-	PMBZ5229B	Z-diode	4.3V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8E	-	PMBZ5230B	Z-diode	4.7V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8F	-	PMBZ5231B	Z-diode	5.1V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8G	-	PMBZ5232B	Z-diode	5.6V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8H	-	PMBZ5233B	Z-diode	6V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8J	-	PMBZ5234B	Z-diode	6.2V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8K	-	PMBZ5235B	Z-diode	6.8V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8L	-	PMBZ5236B	Z-diode	7.5V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8M	-	PMBZ5237B	Z-diode	8.2V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8N	-	PMBZ5238B	Z-diode	8.7V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8P	-	PMBZ5239B	Z-diode	9.1V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
T8p	-	BSR16	Si-pnp	Sw, 60V, 600mA, 250mW, B100..300, 200MHz	SOT-23	16ta	-	3a	Phi
t8Q	-	PMBZ5240B	Z-diode	10V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8R	-	PMBZ5241B	Z-diode	11V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8S	-	PMBZ5242B	Z-diode	12V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8T	-	PMBZ5243B	Z-diode	13V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8U	-	PMBZ5244B	Z-diode	14V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8V	-	PMBZ5245B	Z-diode	15V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8W	-	PMBZ5246B	Z-diode	16V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8X	-	PMBZ5247B	Z-diode	17V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8Y	-	PMBZ5248B	Z-diode	18V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
t8Z	-	PMBZ5249B	Z-diode	19V±5%, If=200mA, 250mW	SOT-23	16dc	-	3a	PhM
T9	-	1SS396	Si-diode	Dual, Schottky, 40V, 100mA	SC-59	16dg	-	3a	Tos
T9	-	AP8822C-19GA	Vdet-IC	1.9V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
T9	-	AP8822C-19GT	Vdet-IC	1.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
T9	-	AP8822C-19PA	Vdet-IC	1.9V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
T9	-	AP8822C-19PT	Vdet-IC	1.9V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
T9	-	BSR18	Si-pnp	Sw, 40V, 200mA, 250mW, B=50..150, >200MHz	SOT-23	16ta	-	3a	Phi
T9	-	ELM7649HCB	Vdet-IC	4.9V±2%, +Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
T9	-	HVM306	C-diode	Dual, Filter, Tuning, 30V, 32pF(2V)	SOT-23	16dg	-	3a	Ren
T9	-	SST4119	n-FET	AF, 40V, 50mA, 300mW, Idss=0.2..0.6mA, Up<6V	SOT-23	16fj	-	3a	Six
T90	-	TK71590S	LVR-IC	LDO, 9V±1.5%, 155mA	SOT-23	16cj	VR1	3d	Tok
T91	-	BSR18R	Si-pnp	Sw, 40V, 200mA, 250mW, B=50..150, >200MHz	SOT-23	16te	-	3a	Phi
T92	-	2SA1977-FB	Si-pnp	Fast-Sw, UHF, 20V, 50mA, 200mW, B=20..100, 8.5GHz	SOT-23	16ta	-	3a	Nec
T92	-	BSR18A	Si-pnp	Sw, 40V, 200mA, 250mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Phi
T92	-	NE97733	Si-pnp	Fast-Sw, UHF, 20V, 50mA, 200mW, B=20..100, 8.5GHz	SOT-23	16ta	-	3a	Cel
T93	-	2SA1978-FB	Si-pnp	Fast-Sw, UHF, 20V, 50mA, 200mW, B=20..100, 5.5Hz	SOT-23	16ta	-	3a	Nec
T93	-	BSR18AR	Si-pnp	Sw, 40V, 200mA, 250mW, B=100..300, >250MHz	SOT-23	16te	-	3a	Phi
T93	-	NE97833	Si-pnp	Fast-Sw, UHF, 20V, 50mA, 200mW, B=20..100, 5.5Hz	SOT-23	16ta	-	3a	Cel
t9A	-	PLVA650A	Z-diode	Avalanshe regulator, 5V, 250mA, 250mW	SOT-23	16dc	-	3a	PhM



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
t9B	-	PLVA653A	Z-diode	Avalanshe regulator, 5.3V, 250mA, 250mW	SOT-23	16dc	-	3a	PhM
t9C	-	PLVA656A	Z-diode	Avalanshe regulator, 5.6V, 250mA, 250mW	SOT-23	16dc	-	3a	PhM
t9D	-	PLVA659A	Z-diode	Avalanshe regulator, 5.9V, 250mA, 250mW	SOT-23	16dc	-	3a	PhM
t9E	-	PLVA662A	Z-diode	Avalanshe regulator, 6.2V, 250mA, 250mW	SOT-23	16dc	-	3a	PhM
t9F	-	PLVA665A	Z-diode	Avalanshe regulator, 6.5V, 250mA, 250mW	SOT-23	16dc	-	3a	PhM
t9G	-	PLVA668A	Z-diode	Avalanshe regulator, 6.8V, 250mA, 250mW	SOT-23	16dc	-	3a	PhM
t9J	-	PLVA2650A	Z-diode	Dual, Avalanshe regulator, 5V, 250mA, 250mW	SOT-23	16df	-	3a	PhM
t9K	-	PLVA2653A	Z-diode	Dual, Avalanshe regulator, 5.3V, 250mA, 250mW	SOT-23	16df	-	3a	PhH
t9L	-	PLVA2656A	Z-diode	Dual, Avalanshe regulator, 5.6V, 250mA, 250mW	SOT-23	16df	-	3a	PhM
t9M	-	PLVA2659A	Z-diode	Dual, Avalanshe regulator, 5.9V, 250mA, 250mW	SOT-23	16df	-	3a	PhM
t9N	-	PLVA2662A	Z-diode	Dual, Avalanshe regulator, 6.2V, 250mA, 250mW	SOT-23	16df	-	3a	PhM
t9O	-	PLVA2665A	Z-diode	Dual, Avalanshe regulator, 6.5V, 250mA, 250mW	SOT-23	16df	-	3a	PhM
t9P	-	PLVA2668A	Z-diode	Dual, Avalanshe regulator, 6.8V, 250mA, 250mW	SOT-23	16df	-	3a	PhM
TA	-	2SC5431-EB	Si-npn	UHF-tun, Mix/Osc, 20V, 60mA, 100mW, 4.3GHz, B=60..90	SOT-523F	18ta	-	3a	Nec
TA	-	BAS16TPT	Si-diode	Sw, 100V, 150mA, Vf<1.25V(150mA), 4ns	SOT-416	16dc	-	3a	Chm
TA	-	KTC3295A	Si-npn	AF, 60V, 150mA, 150mW, B=600..1800, >250MHz	SOT-23	16ta	-	3f	Kec
tA1	-	BZX84-C75	Z-diode	75V±5%, Zzt=250Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxM
tAA	-	PDTC144VT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/10k	SOT-23	16ta	-	3a	NxM
TAA	-	BC856A	Si-pnp	GP, 80V, 100mA, 200mW, B=110..220, 150MHz	SOT-23	16ta	-	3a	Auk
TAA	-	BC856FA	Si-pnp	GP, 80V, 100mA, 200mW, B=110..220, 150MHz	SOT-23F	18ta	-	3a	Auk
tAB	-	PDTA115ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k	SOT-23	16ta	-	3a	NxM
TAB	-	BC856B	Si-pnp	GP, 80V, 100mA, 200mW, B=200..450, 150MHz	SOT-23	16ta	-	3a	Auk
TAB	-	BC856FB	Si-pnp	GP, 80V, 100mA, 200mW, B=200..450, 150MHz	SOT-23F	18ta	-	3a	Auk
tAC	-	PDTA115TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=100k	SOT-23	16ta	-	3a	NxM
TAC	-	BC856C	Si-pnp	GP, 80V, 100mA, 200mW, B=420..800, 150MHz	SOT-23	16ta	-	3a	Auk
TAC	-	BC856FC	Si-pnp	GP, 80V, 100mA, 200mW, B=420..800, 150MHz	SOT-23F	18ta	-	3a	Auk
tAD	-	PDTA123YT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxM
tAE	-	PDTA124TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=22k	SOT-23	16ta	-	3a	NxM
tAF	-	PDTA144TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=47k	SOT-23	16ta	-	3a	NxM
tAG	-	PDTA144VU	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/10k	SOT-23	16ta	-	3a	NxM
tAK	-	PDTC115TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=100k	SOT-23	16ta	-	3a	NxM
tAL	-	PDTC123YT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxM
tAM	-	PDTA113ZT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxM
TB	-	2SC5431-FB	Si-npn	UHF-tun, Mix/Osc, 20V, 60mA, 100mW, 4.3GHz, B=80..120	SOT-523F	18ta	-	3a	Nec
TB	-	KTC3295B	Si-npn	AF, 60V, 150mA, 150mW, B=1200..3600, >250MHz	SOT-23	16ta	-	3f	Kec
tB0	-	BZX84-C68	Z-diode	68V±5%, Zzt=200Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxM
tB1	-	BZX84-C3V3	Z-diode	3.3V±5%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tB2	-	BZX84-C3V6	Z-diode	3.6V±5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tB3	-	BZX84-C3V9	Z-diode	3.9V±5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tB4	-	BZX84-C43	Z-diode	43V±5%, Zzt=150Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tB5	-	BZX84-C47	Z-diode	47V±5%, Zzt=170Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tB6	-	BZX84-C4V3	Z-diode	4.3V±5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tB7	-	BZX84-C51	Z-diode	51V±5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tB8	-	BZX84-C56	Z-diode	56V±5%, Zzt=135Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxM
tB9	-	BZX84-C62	Z-diode	62V±5%, Zzt=150Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxM
TC	-	2SC2736	Si-npn	VHF/UHF-Osc, 30V, 50mA, 150mW, B=30..200, 2.2GHz	SOT-23	16ta	-	3a	Ren
TC	-	2SC5432-EB	Si-npn	VHF/UHF, 12V, 100mA, 100mW, 4.5GHz, B=60..90	SOT-523F	18ta	-	3a	Nec
tC0	-	BZX84-A13	Z-diode	13V±1%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tC1	-	BZX84-A3V6	Z-diode	3.6V±1%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tC2	-	BZX84-A20	Z-diode	20V±1%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tC3	-	BZX84-A36	Z-diode	36V±1%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tC4	-	BZX84-A39	Z-diode	39V±1%, Zzt=130Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tC5	-	BZX84-A43	Z-diode	43V±1%, Zzt=150Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tC6	-	BZX84-A51	Z-diode	51V±1%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
TD	-	2SC5432-FB	Si-npn	VHF/UHF, 12V, 100mA, 100mW, 4.5GHz, B=80..120	SOT-523F	18ta	-	3a	Nec
TE	-	2SC5433-EB	Si-npn	VHF/UHF, 10V, 65mA, 100mW, 7GHz, B=60..90	SOT-523F	18ta	-	3a	Nec
TE	-	BAS21TPT	Si-diode	Sw, 250V, 200mA, Vf<1.25V(200mA), 50ns	SOT-416	16dc	-	3a	Chm
TE1	-	CHDTA143TEPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=47k	SOT-416	16ta	-	3a	Chm
TE2	-	CHDTA114TEPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=10k	SOT-416	16ta	-	3a	Chm
TE3	-	CHDTA124TEPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=22k	SOT-416	16ta	-	3a	Chm
TE4	-	CHDTA144TEPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=4.7k	SOT-416	16ta	-	3a	Chm
TE5	-	CHDTA115TEPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=100k	SOT-416	16ta	-	3a	Chm
TEA	-	CHDTC143TEPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=4.7k	SOT-416	16ta	-	3a	Chm
TEB	-	CHDTC114TEPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=10k	SOT-416	16ta	-	3a	Chm
TEC	-	CHDTC124TEPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=22k	SOT-416	16ta	-	3a	Chm
TED	-	CHDTC144TEPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=47k	SOT-416	16ta	-	3a	Chm
TEE	-	CHDTC115TEPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=100k	SOT-416	16ta	-	3a	Chm
TF	-	2SC5433-FB	Si-npn	VHF/UHF, 10V, 65mA, 100mW, 7GHz, B=80..120	SOT-523F	18ta	-	3a	Nec
TF	-	BAL99	Si-diode	Sw, Fast, 75V, 0.25A, 250mW, <4ns	SOT-23	16dr	-	3a	Trs
TG	-	2SK302-GR	n-FET	VHF, 20V, 30mA, 200mW, Idss=6..14mA	SOT-23	16fk	-	3a	Tos

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
TG	-	2SK882-GR	n-FET	FM/VHF, 20V, 30mA, 100mW, Idss=6..14mA, Up<2.5V	SOT-323	16fk	-	3a	Tos
TG	-	CH715TPT	Si-diode	SBD, 40V, 30mA, Vf<0.37V(1mA)	SOT-416	16dc	-	3a	Chm
tG1	-	PMBT5551	Si-npn	GP, 180V, 300mA, 250mW, B=80..250, 100..300MHz	SOT-23	16ta	-	3a	PhH
tG3	-	PMST5551	Si-npn	HV, 180V, 300mA, 200mW, B=80..250, 100..300MHz	SOT-323	16ta	-	3a	PhM
TH	-	2SC5434-EB	Si-npn	VHF/UHF, 10V, 35mA, 100mW, 8GHz, B=60..90	SOT-523F	18ta	-	3a	Nec
TH	-	CH715TAPT	Si-diode	Dual, SBD, 40V, 30mA, Vf<0.37V(1mA)	SOT-416	16dg	-	3a	Chm
TI	-	CH715TSPT	Si-diode	Dual, SBD, 40V, 30mA, Vf<0.37V(1mA)	SOT-416	16dl	-	3a	Chm
TI-	-	2SC4197	Si-npn	UHF-F-Conv, 25V, 50mA, 150mW, B=50..180, 3.8GHz	SOT-323	16ta	-	3a	Ren
TI-	-	2SC4260	Si-npn	VHF/UHF, 25V, 50mA, 100mW, B=50..180, >3GHz	CMPAK	16ta	-	3a	Ren
TI-	-	2SC5136	Si-npn	VHF/UHF, 25V, 50mA, 80mW, B=50..180, 3.8GHz	SMPAK	16ta	-	3a	Ren
TJ	-	2SC5434-FB	Si-npn	VHF/UHF, 10V, 35mA, 100mW, 8GHz, B=80..120	SOT-523F	18ta	-	3a	Nec
TJ	-	MMBD4448TPT	Si-diode	Sw, 80V, 250mA, Vf<1V(100mA), 4ns	SOT-416	16dc	-	3a	Chm
TK	-	2SC5435-EB	Si-npn	VHF/UHF, 9V, 30mA, 100mW, 12GHz, B=60..90	SOT-523F	18ta	-	3a	Nec
TK	-	MMBD4448TAPT	Si-diode	Dual, Sw, 80V, 250mA, Vf<1V(100mA), 4ns	SOT-416	16df	-	3a	Chm
TK0	-	CHDTB114TKPT	Si-pnp-Digi	Sw, 50V, 500mA, 250MHz, R1=10k	SOT-23	16ta	-	3a	Chm
TK2	-	CHDTA143TKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=4.7k	SOT-23	16ta	-	3a	Chm
TK3	-	CHDTA114TKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=10k	SOT-23	16ta	-	3a	Chm
TK4	-	CHDTA124TKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=22k	SOT-23	16ta	-	3a	Chm
TK5	-	CHDTA144TKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=47k	SOT-23	16ta	-	3a	Chm
TK6	-	CHDTA115TKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=100k	SOT-23	16ta	-	3a	Chm
TK7	-	CHDTA125TKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=200k	SOT-23	16ta	-	3a	Chm
TK8	-	CHDTB123TKPT	Si-pnp-Digi	Sw, 40V, 500mA, 250MHz, R1=2.2k	SOT-23	16ta	-	3a	Chm
TK9	-	CHDTB143TKPT	Si-pnp-Digi	Sw, 40V, 500mA, 250MHz, R1=4.7k	SOT-23	16ta	-	3a	Chm
TKA	-	CHDTC123TKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=2.2k	SOT-23	16ta	-	3a	Chm
TKB	-	CHDTC143TKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=4.7k	SOT-23	16ta	-	3a	Chm
TKC	-	CHDTC114TKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=10k	SOT-23	16ta	-	3a	Chm
TKD	-	CHDTC124TKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=22k	SOT-23	16ta	-	3a	Chm
TKE	-	CHDTC144TKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=47k	SOT-23	16ta	-	3a	Chm
TKF	-	CHDTC115TKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=100k	SOT-23	16ta	-	3a	Chm
TKG	-	CHDTC125TKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=200k	SOT-23	16ta	-	3a	Chm
TKH	-	CHDTD123TKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=2.2k	SOT-23	16ta	-	3a	Chm
TKI	-	CHDTD143TKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=4.7k	SOT-23	16ta	-	3a	Chm
TKJ	-	CHDTC323TKPT	Si-npn-Digi	Sw, 15V, 600mA, 200MHz, R1=2.2k	SOT-23	16ta	-	3a	Chm
TKK	-	CHDTC343TKPT	Si-npn-Digi	Sw, 15V, 600mA, 200MHz, R1=4.7k	SOT-23	16ta	-	3a	Chm
TKL	-	CHDTC363TKPT	Si-npn-Digi	Sw, 15V, 600mA, 200MHz, R1=6.8k	SOT-23	16ta	-	3a	Chm
TKM	-	CHDTC314TKPT	Si-npn-Digi	Sw, 15V, 600mA, 200MHz, R1=10k	SOT-23	16ta	-	3a	Chm
TKN	-	CHDTC614TKPT	Si-npn-Digi	Sw, 20V, 600mA, 150MHz, R1=10k	SOT-23	16ta	-	3a	Chm
TKO	-	CHDTC623TKPT	Si-npn-Digi	Sw, 20V, 600mA, 150MHz, R1=2.5k	SOT-23	16ta	-	3a	Chm
TKP	-	CHDTC643TKPT	Si-npn-Digi	Sw, 20V, 600mA, 150MHz, R1=4.7k	SOT-23	16ta	-	3a	Chm
TL	-	2SA1573	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=22k	SOT-23	16ta	-	3a	San
TL	-	2SC5435-FB	Si-npn	VHF/UHF, 9V, 30mA, 100mW, 12GHz, B=80..120	SOT-523F	18ta	-	3a	Nec
TL	-	MMBD4448TCPT	Si-diode	Dual, Sw, 80V, 250mA, Vf<1V(100mA), 4ns	SOT-416	16dg	-	3a	Chm
TM	-	MMBD4448TSPT	Si-diode	Dual, Sw, 80V, 250mA, Vf<1V(100mA), 4ns	SOT-416	16dl	-	3a	Chm
TN	-	2SC5436-EB	Si-npn	VHF/UHF, 5V, 30mA, 100mW, 14GHz, B=60..90	SOT-523F	18ta	-	3a	Nec
TN	-	CH145TPT	Si-diode	SBD, 45V, 100mA, Vf<0.6V(50mA)	SOT-416	16dc	-	3a	Chm
TO	-	2SK302-O	n-FET	VHF, 20V, 30mA, 200mW, Idss=1.5..3.5mA	SOT-23	16fk	-	3a	Tos
TO	-	BAS40TGP	Si-diode	SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-416	16dc	-	3a	Chm
tO4	-	PMBS3904	Si-npn	Sw, 60V, 200mA, 250mW, B=100..300, >180MHz	SOT-23	16ta	-	3a	PhM
tO6	-	PMBS3906	Si-pnp	Sw, 40V, 100mA, 250mW, B=100..300, >150MHz	SOT-23	16ta	-	3a	PhM
TP	-	2SC5436-FB	Si-npn	VHF/UHF, 5V, 30mA, 100mW, 14GHz, B=80..120	SOT-523F	18ta	-	3a	Nec
TP	-	BAS40TAGP	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-416	16df	-	3a	Chm
TQ	-	2SA1530A-Q	Si-pnp	AF, 60V, 150mA, 200mW, B=120..270, 200MHz	SOT-23	16ta	-	3a	Pan
TQ	-	2SA1603-Q	Si-pnp	AF, 50V, 100mA, 150mW, 200MHz, B=120..270	SOT-323	16ta	-	3a	Mit
TQ	-	2SA1989-Q	Si-pnp	AF, 50V, 100mA, 150mW, B=120..270, 200MHz	SC-75A	16ta	-	3a	Mit
TQ	-	BAS40TCGP	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-416	16dg	-	3a	Chm
TR	-	2SA1530A-R	Si-pnp	AF, 60V, 150mA, 200mW, B=180..390, 200MHz	SOT-23	16ta	-	3a	Pan
TR	-	2SA1603-R	Si-pnp	AF, 50V, 100mA, 150mW, 200MHz, B=180..390	SOT-323	16ta	-	3a	Mit
TR	-	2SA1989-R	Si-pnp	AF, 50V, 100mA, 150mW, B=180..390, 200MHz	SC-75A	16ta	-	3a	Mit
TR	-	2SC2406-R	Si-npn	AF, LN, 55V, 10mA, 200mW, B=180..360, 200MHz	SOT-23	16ta	-	3a	Pan
TR	-	2SC3906K-R	Si-npn	AF-Drv, 120V, 50mA, 200mW, B=390..820, 140MHz	SC-59	16ta	-	3a	Rhm
TR	-	2SC3929A-R	Si-npn	AF, LN, 55V, 50mA, 150mW, B=180..360, 80MHz	SOT-323	16ta	-	3a	Pan
TR	-	2SC4102-R	Si-npn	AF, 120V, 50mA, 200mW, B=180..390, >140MHz	SOT-323	16ta	-	3a	Rhm
TR	-	BAS40TSGP	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-416	16dl	-	3a	Chm
TR	-	CAT809TSDI-GT3	Vdet-IC	3.08V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3d	Ons
TR	-	CAT809TTBI-GT3	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
tR0	-	BZX84-B56	Z-diode	56V±2.5%, Zzt=135Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxM
tR1	-	BZX84-B5V1	Z-diode	5.1V±2.5%, Zzt=60Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tR2	-	BZX84-B5V6	Z-diode	5.6V±2.5%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tR3	-	BZX84-B62	Z-diode	62V±2.5%, Zzt=150Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxM
tR4	-	BZX84-B68	Z-diode	68V±2.5%, Zzt=200Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxM



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
tR5	-	BZX84-B6V2	Z-diode	6.2V±2.5%, Zzt=10Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tR6	-	BZX84-B6V8	Z-diode	6.8V±2.5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tR7	-	BZX84-B75	Z-diode	75V±2.5%, Zzt=250Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxM
tR8	-	BZX84-B7V5	Z-diode	7.5V±2.5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tR9	-	BZX84-B8V2	Z-diode	8.2V±2.5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
TS	-	2SA1530A-S	Si-pnp	AF, 60V, 150mA, 200mW, B=270..560, 200MHz	SOT-23	16ta	-	3a	Pan
TS	-	2SA1603-S	Si-pnp	AF, 50V, 100mA, 150mW, 200MHz, B=270..560	SOT-323	16ta	-	3a	Mit
TS	-	2SA1989-S	Si-pnp	AF, 50V, 100mA, 150mW, B=270..560, 200MHz	SC-75A	16ta	-	3a	Mit
TS	-	2SC2406-S	Si-npn	AF, LN, 55V, 10mA, 200mW, B=260..520, 200MHz	SOT-23	16ta	-	3a	Pan
TS	-	2SC3906K-S	Si-npn	AF-Drv, 120V, 50mA, 200mW, B=270..560, 140MHz	SC-59	16ta	-	3a	Rhm
TS	-	2SC3929A-S	Si-npn	AF, LN, 55V, 50mA, 150mW, B=260..520, 80MHz	SOT-323	16ta	-	3a	Pan
TS	-	2SC4102-S	Si-npn	AF, 120V, 50mA, 200mW, B=270..560, >140MHz	SOT-323	16ta	-	3a	Rhm
TS	-	2SC5437-EB	Si-npn	VHF/UHF, 9V, 50mA, 100mW, 9.5Hz, B=60..90	SOT-523F	18ta	-	3a	Nec
TS	-	BAT54TPT	Si-diode	SBD, 30V, 200mA, Vf<1V(100mA), 5ns	SOT-416	16dc	-	3a	Chm
TS	-	CAT810TSDI-GT3	Vdet-IC	3.08V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3d	Ons
TS	-	CAT810TTBI-GT3	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ons
tS0	-	BZX84-B39	Z-diode	39V±2.5%, Zzt=130Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tS1	-	BZX84-B3V0	Z-diode	3.0V±2.5%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tS2	-	BZX84-B3V3	Z-diode	3.3V±2.5%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tS3	-	BZX84-B3V6	Z-diode	3.6V±2.5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tS4	-	BZX84-B3V9	Z-diode	3.9V±2.5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tS5	-	BZX84-B43	Z-diode	43V±2.5%, Zzt=150Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tS6	-	BZX84-B47	Z-diode	47V±2.5%, Zzt=170Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tS7	-	BZX84-B4V3	Z-diode	4.3V±2.5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tS8	-	BZX84-B4V7	Z-diode	4.7V±2.5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tS9	-	BZX84-B51	Z-diode	51V±2.5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
TT	-	2SA1036KPT-Q	Si-pnp	AF, Sw, 32V, 500mA, B=120..270, 200MHz	SOT-23	16ta	-	3a	Chm
TT	-	2SA1530A-T	Si-pnp	AF, 60V, 150mA, 200mW, B=360..700, 200MHz	SOT-23	16ta	-	3a	Pan
TT	-	2SA1603-T	Si-pnp	AF, 50V, 100mA, 150mW, 200MHz, B=390..820	SOT-323	16ta	-	3a	Mit
TT	-	2SA1989-T	Si-pnp	AF, 50V, 100mA, 150mW, B=390..820, 200MHz	SC-75A	16ta	-	3a	Mit
TT	-	2SC2406-T	Si-npn	AF, LN, 55V, 10mA, 200mW, B=360..700, 200MHz	SOT-23	16ta	-	3a	Pan
TT	-	2SC3929A-T	Si-npn	AF, LN, 55V, 50mA, 150mW, B=360..700, 80MHz	SOT-323	16ta	-	3a	Pan
TT	-	2SC5437-FB	Si-npn	VHF/UHF, 9V, 50mA, 100mW, 9.5Hz, B=80..120	SOT-523F	18ta	-	3a	Nec
TT	-	BAT54TAPT	Si-diode	Dual, SBD, 30V, 200mA, Vf<1V(100mA), 5ns	SOT-416	16df	-	3a	Chm
tT1	-	BZX84-B9V1	Z-diode	9.1V±2.5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tT2	-	BZX84-C27	Z-diode	27V±5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tT3	-	BZX84-C2V4	Z-diode	2.4V±5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tT4	-	BZX84-C2V7	Z-diode	2.7V±5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
TT4	-	2SC4519-4	Si-npn	Sw, Hi-Sp, 60V, 500mA, 200mW, B=100..200, 350MHz	CP	16ta	-	3a	San
tT5	-	BZX84-C30	Z-diode	30V±5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
TT5	-	2SC4519-5	Si-npn	Sw, Hi-Sp, 60V, 500mA, 200mW, B=140..280, 350MHz	CP	16ta	-	3a	San
tT6	-	BZX84-C33	Z-diode	33V±5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
TT6	-	2SC4519-6	Si-npn	Sw, Hi-Sp, 60V, 500mA, 200mW, B=200..400, 350MHz	CP	16ta	-	3a	San
tT7	-	BZX84-C36	Z-diode	36V±5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tT8	-	BZX84-C39	Z-diode	39V±5%, Zzt=130Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tT9	-	BZX84-C3V0	Z-diode	3.0V±5%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
TU	-	BAT54TCPT	Si-diode	Dual, SBD, 30V, 200mA, Vf<1V(100mA), 5ns	SOT-416	16dg	-	3a	Chm
TU1	-	CHDTA113TUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=1k	SOT-323	16ta	-	3a	Chm
TU2	-	CHDTA114TUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=10k	SOT-323	16ta	-	3a	Chm
TU3	-	CHDTA124TUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=22k	SOT-323	16ta	-	3a	Chm
TU4	-	CHDTA144TUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=47k	SOT-323	16ta	-	3a	Chm
TU5	-	CHDTA115TUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=100k	SOT-323	16ta	-	3a	Chm
TU6	-	CHDTA125TUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=200k	SOT-323	16ta	-	3a	Chm
TU7	-	CHDTA143TUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1=4.7k	SOT-323	16ta	-	3a	Chm
TUA	-	CHDTC143TUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=4.7k	SOT-323	16ta	-	3a	Chm
TUB	-	CHDTC114TUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=10k	SOT-323	16ta	-	3a	Chm
TUC	-	CHDTC124TUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=22k	SOT-323	16ta	-	3a	Chm
TUD	-	CHDTC144TUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=47k	SOT-323	16ta	-	3a	Chm
TUE	-	CHDTC115TUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=100k	SOT-323	16ta	-	3a	Chm
TUF	-	CHDTC125TUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1=200k	SOT-323	16ta	-	3a	Chm
TUG	-	CHDTC323TUPT	Si-npn-Digi	Sw, 15V, 600mA, 200MHz, R1=2.2k	SOT-323	16ta	-	3a	Chm
TUH	-	CHDTC314TUPT	Si-npn-Digi	Sw, 15V, 600mA, 200MHz, R1=10k	SOT-323	16ta	-	3a	Chm
TUI	-	CHDTC614TUPT	Si-npn-Digi	Sw, 20V, 600mA, 150MHz, R1=10k	SOT-323	16ta	-	3a	Chm
TUJ	-	CHDTC623TUPT	Si-npn-Digi	Sw, 20V, 600mA, 150MHz, R1=2.5k	SOT-323	16ta	-	3a	Chm
TUK	-	CHDTC643TUPT	Si-npn-Digi	Sw, 20V, 600mA, 150MHz, R1=4.7k	SOT-323	16ta	-	3a	Chm
TV	-	2SC5599	Si-npn	VHF/UHF, 9V, 100mA, 200mW, B=80..160, 6.5GHz	SOT-23	16ta	-	3a	Nec
TV	-	2SC5600	Si-npn	VHF/UHF, 9V, 100mA, 200mW, B=80..160, 6.5GHz	SOT-523F	18ta	-	3a	Nec
TV	-	BAT54TSPT	Si-diode	Dual, SBD, 30V, 200mA, Vf<1V(100mA), 5ns	SOT-416	16dl	-	3a	Chm
tV1	-	BAS31	Si-diode	Dual, GP, Contr, Aval., 90V, 250mA, 250mW, 35pF, <50ns	SOT-23	16dl	-	3a	PhM
tV2	-	BAS35	Si-diode	Dual, GP, Contr, Aval., 90V, 250mA, 250mW, 35pF, <50ns	SOT-23	16df	-	3a	PhM

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
tV3	-	BAT54A	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16df	-	3a	PhM
tV4	-	BAT54S	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dl	-	3a	PhM
tV5	-	BAV23S	Si-diode	Dual, GP, 200V, 225mA, Vs<1.25V(200mA), <50ns	SOT-23	16dl	-	3a	PhM
TW	-	2SC5602	Si-npn	RF, LN, 15V, 35mA, 200mW, 13.5GHz, B=60..120	SC-59	16ta	-	3a	Nec
TW	-	2SC5603	Si-npn	VHF/UHF, 15V, 35mA, 200mW, B=60..120, 13.5GHz	SOT-523F	18ta	-	3a	Nec
TW	-	BAS70TGP	Si-diode	SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-416	16dc	-	3a	Chm
TX	-	BAS70TAGP	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-416	16df	-	3a	Chm
TY	-	2SC3912	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	San
TY	-	2SK302-Y	n-FET	VHF, 20V, 30mA, 200mW, Idss=3..7mA	SOT-23	16fk	-	3a	Tos
TY	-	2SK882	n-MOSFET	VHF, 20V, Idss=3..14mA, Up<2.5V	SOT-323	16fk	-	3a	Tos
TY	-	2SK882-Y	n-FET	FM/VHF, 20V, 30mA, 100mW, Idss=3..7mA, Up<2.5V	SOT-323	16fk	-	3a	Tos
TY	-	BAS70TCGP	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-416	16dg	-	3a	Chm
tY1	-	BZX84-B33	Z-diode	33V±2.5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tY2	-	BZX84-B36	Z-diode	36V±2.5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
TZ	-	BAS70TSGP	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-416	16dl	-	3a	Chm
tZ0	-	BZX84-B2V4	Z-diode	2.4V±2.5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tZ1	-	BZX84-B2V7	Z-diode	2.7V±2.5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tZ4	-	BZX84-B30	Z-diode	30V±2.5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tZ5	-	BZX84-B27	Z-diode	27V±2.5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tZ6	-	BZX84-B11	Z-diode	11V±2.5%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tZ7	-	BZX84-B12	Z-diode	12V±2.5%, Zzt=25Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tZ8	-	BZX84-B13	Z-diode	13V±2.5%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tZ9	-	BZX84-B15	Z-diode	15V±2.5%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
tZL	-	PDTA123TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=2.2k	SOT-23	16ta	-	3a	NxM
tZM	-	PDTC123TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=2.2k	SOT-23	16ta	-	3a	NxM
u	-	AX6903GA	Vdet-IC	2.25V±1.5%, -Reset PPO	SC-70	16vda	VD7	3b	Axl
U	cr	ELM7540NEB	Vdet-IC	4.0V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
U	cs	ELM7540CEB	Vdet-IC	4.0V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
U0	-	AP8822C-20GA	Vdet-IC	2.0V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
U0	-	AP8822C-20GT	Vdet-IC	2.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
U0	-	AP8822C-20PA	Vdet-IC	2.0V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
U0	-	AP8822C-20PT	Vdet-IC	2.0V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
U0	-	ELM7620LCB	Vdet-IC	2.0V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
U0	-	ELM9740CBB	Vdet-IC	4.0V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
U0	-	RN2101FS	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, R1/R2=4.7k/4.7k	fSM	19ta	-	3a	Tos
U1	-	AP8822C-21GA	Vdet-IC	2.1V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
U1	-	AP8822C-21GT	Vdet-IC	2.1V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
U1	-	AP8822C-21PA	Vdet-IC	2.1V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
U1	-	AP8822C-21PT	Vdet-IC	2.1V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
U1	-	BCX19	Si-npn	AF-Drv, 50V, 500mA, 250mW, B=100..600, 200MHz	SOT-23	16ta	-	3a	Ste
U1	-	ELM7621LCB	Vdet-IC	2.1V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
U1	-	ELM9741CBB	Vdet-IC	4.1V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
U1	-	RN2102FS	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, R1/R2=10k/10k	fSM	19ta	-	3a	Tos
U12	-	2SC2758-12	Si-npn	RF-amp, 25V, 20mA, 150mW, B=60..120, 750MHz	SOT-23	16ta	-	3a	Nec
U13	-	2SC2758-13	Si-npn	RF-amp, 25V, 20mA, 150mW, B=90..180, 750MHz	SOT-23	16ta	-	3a	Nec
U14	-	2SC2758-14	Si-npn	RF-amp, 25V, 20mA, 150mW, B=120..240, 750MHz	SOT-23	16ta	-	3a	Nec
U16	-	2SC4183-16	Si-npn	UHF TV-Tuner, 30V, 20mA, 150mW, B=60..120, 1GHz	SOT-323	16ta	-	3a	Nec
U16C	-	SS6680C-16CU	Vdet-IC	1.6V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U16N	-	SS6680N-16CU	Vdet-IC	1.6V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U16P	-	SS6680P-16CU	Vdet-IC	1.6V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U17	-	2SC4183-17	Si-npn	UHF TV-Tuner, 30V, 20mA, 150mW, B=90..180, 1GHz	SOT-323	16ta	-	3a	Nec
U17C	-	SS6680C-17CU	Vdet-IC	1.7V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U17N	-	SS6680N-17CU	Vdet-IC	1.7V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U17P	-	SS6680P-17CU	Vdet-IC	1.7V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U18	-	2SC4183-18	Si-npn	UHF TV-Tuner, 30V, 20mA, 150mW, B=120..240, 1GHz	SOT-323	16ta	-	3a	Nec
U18C	-	SS6680C-18CU	Vdet-IC	1.8V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U18N	-	SS6680N-18CU	Vdet-IC	1.8V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U18P	-	SS6680P-18CU	Vdet-IC	1.8V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U19C	-	SS6680C-19CU	Vdet-IC	1.9V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U19N	-	SS6680N-19CU	Vdet-IC	1.9V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U19P	-	SS6680P-19CU	Vdet-IC	1.9V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U1p	-	BCX19	Si-npn	AF-Drv, 50V, 500mA, 250mW, B=100..600, 200MHz	SOT-23	16ta	-	3a	PhH
U1t	-	BCX19	Si-npn	AF-Drv, 50V, 500mA, 250mW, B=100..600, 200MHz	SOT-23	16ta	-	3a	PhM
U2	-	2SK613-2	n-FET	V-CAM, 15V, 50mA, 150mW, Idss=13.4..21, Up<1.26V	SOT-23	16fa	-	3a	Soy
U2	-	AP8822C-22GA	Vdet-IC	2.2V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
U2	-	AP8822C-22GT	Vdet-IC	2.2V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
U2	-	AP8822C-22PA	Vdet-IC	2.2V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
U2	-	AP8822C-22PT	Vdet-IC	2.2V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
U2	-	BCX20	Si-npn	AF, 30V, 500mA, 250mW, B=100..600, >100MHz	SOT-23	16ta	-	3a	Ste
U2	-	ELM7622LCB	Vdet-IC	2.2V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U2	-	ELM9742CBB	Vdet-IC	4.2V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
U2	-	RN2103FS	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, R1/R2=22k/22k	fSM	19ta	-	3a	Tos
U20C	-	SS6680C-20CU	Vdet-IC	2.0V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U20N	-	SS6680N-20CU	Vdet-IC	2.0V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U20P	-	SS6680P-20CU	Vdet-IC	2.0V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U21	-	2SC2759-21	Si-npn	RF-amp, 14V, 50mA, 150mW, B=40..80, 1.5GHz	SOT-23	16ta	-	3a	Nec
U21	-	2SC4185-21	Si-npn	UHF-Mix, Osc, 30V, 50mA, 160mW, B=40..80, 2GHz	SOT-323	16ta	-	3a	Nec
U21C	-	SS6680C-21CU	Vdet-IC	2.1V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U21N	-	SS6680N-21CU	Vdet-IC	2.1V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U21P	-	SS6680P-21CU	Vdet-IC	2.1V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U22	-	2SC2759-22	Si-npn	RF-amp, 14V, 50mA, 150mW, B=60..120, 1.5GHz	SOT-23	16ta	-	3a	Nec
U22	-	2SC4185-22	Si-npn	UHF-Mix, Osc, 30V, 50mA, 160mW, B=60..120, 2GHz	SOT-323	16ta	-	3a	Nec
U22C	-	SS6680C-22CU	Vdet-IC	2.2V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U22N	-	SS6680N-22CU	Vdet-IC	2.2V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U22P	-	SS6680P-22CU	Vdet-IC	2.2V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U23	-	2SC2759-23	Si-npn	RF-amp, 14V, 50mA, 150mW, B=90..180, 1.5GHz	SOT-23	16ta	-	3a	Nec
U23	-	2SC4185-23	Si-npn	UHF-Mix, Osc, 30V, 50mA, 160mW, B=90..80, 2GHz	SOT-323	16ta	-	3a	Nec
U23C	-	SS6680C-23CU	Vdet-IC	2.3V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U23N	-	SS6680N-23CU	Vdet-IC	2.3V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U23P	-	SS6680P-23CU	Vdet-IC	2.3V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U24C	-	SS6680C-24CU	Vdet-IC	2.4V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U24N	-	SS6680N-24CU	Vdet-IC	2.4V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U24P	-	SS6680P-24CU	Vdet-IC	2.4V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U25C	-	SS6680C-25CU	Vdet-IC	2.5V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U25N	-	SS6680N-25CU	Vdet-IC	2.5V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U25P	-	SS6680P-25CU	Vdet-IC	2.5V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U26C	-	SS6680C-26CU	Vdet-IC	2.6V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U26N	-	SS6680N-26CU	Vdet-IC	2.6V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U26P	-	SS6680P-26CU	Vdet-IC	2.6V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U27C	-	SS6680C-27CU	Vdet-IC	2.7V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U27N	-	SS6680N-27CU	Vdet-IC	2.7V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U27P	-	SS6680P-27CU	Vdet-IC	2.7V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U28C	-	SS6680C-28CU	Vdet-IC	2.8V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U28N	-	SS6680N-28CU	Vdet-IC	2.8V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U28P	-	SS6680P-28CU	Vdet-IC	2.8V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U29C	-	SS6680C-29CU	Vdet-IC	2.9V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U29N	-	SS6680N-29CU	Vdet-IC	2.9V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U29P	-	SS6680P-29CU	Vdet-IC	2.9V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U2p	-	BCX20	Si-pnp	AF, 30V, 500mA, 250mW, B=100..600, >100MHz	SOT-23	16ta	-	3a	Phi
U3	-	2SK613-3	n-FET	V-CAM, 15V, 50mA, 150mW, Idss=19..30.2, Up<1.26V	SOT-23	16fa	-	3a	Soy
U3	-	AP8822C-23GA	Vdet-IC	2.3V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
U3	-	AP8822C-23GT	Vdet-IC	2.3V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
U3	-	AP8822C-23PA	Vdet-IC	2.3V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
U3	-	AP8822C-23PT	Vdet-IC	2.3V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
U3	-	ELM7623LCB	Vdet-IC	2.3V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
U3	-	ELM9743CBB	Vdet-IC	4.3V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
U3	-	RN2104FS	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, R1/R2=47k/47k	fSM	19ta	-	3a	Tos
U30C	-	SS6680C-30CU	Vdet-IC	3.0V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U30N	-	SS6680N-30CU	Vdet-IC	3.0V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U30P	-	SS6680P-30CU	Vdet-IC	3.0V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U31C	-	SS6680C-31CU	Vdet-IC	3.1V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U31N	-	SS6680N-31CU	Vdet-IC	3.1V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U31P	-	SS6680P-31CU	Vdet-IC	3.1V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U32C	-	SS6680C-32CU	Vdet-IC	3.2V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U32N	-	SS6680N-32CU	Vdet-IC	3.2V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U32P	-	SS6680P-32CU	Vdet-IC	3.2V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U33C	-	SS6680C-33CU	Vdet-IC	3.3V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U33N	-	SS6680N-33CU	Vdet-IC	3.3V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U33P	-	SS6680P-33CU	Vdet-IC	3.3V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U34C	-	SS6680C-34CU	Vdet-IC	3.4V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U34N	-	SS6680N-34CU	Vdet-IC	3.4V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U34P	-	SS6680P-34CU	Vdet-IC	3.4V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U35	-	BSR19	Si-npn	Sw, 160V, 300mA, 250mW, B=60..250, 100MHz	SOT-23	16ta	-	3a	Phi
U35C	-	SS6680C-35CU	Vdet-IC	3.5V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U35N	-	SS6680N-35CU	Vdet-IC	3.5V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U35P	-	SS6680P-35CU	Vdet-IC	3.5V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U36	-	BSR19A	Si-npn	Sw, 180V, 300mA, 250mW, B=80..250, 100MHz	SOT-23	16ta	-	3a	Phi
U36C	-	SS6680C-36CU	Vdet-IC	3.6V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U36N	-	SS6680N-36CU	Vdet-IC	3.6V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U36P	-	SS6680P-36CU	Vdet-IC	3.6V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U37C	-	SS6680C-37CU	Vdet-IC	3.7V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U37N	-	SS6680N-37CU	Vdet-IC	3.7V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U37P	-	SS6680P-37CU	Vdet-IC	3.7V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U38C	-	SS6680C-38CU	Vdet-IC	3.8V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U38N	-	SS6680N-38CU	Vdet-IC	3.8V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U38P	-	SS6680P-38CU	Vdet-IC	3.8V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U39C	-	SS6680C-39CU	Vdet-IC	3.9V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U39N	-	SS6680N-39CU	Vdet-IC	3.9V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U39P	-	SS6680P-39CU	Vdet-IC	3.9V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U4	-	2SK613-4	n-FET	V-CAM, 15V, 50mA, 150mW, Idss=24.7..42, Up<1.26V	SOT-23	16fa	-	3a	Soy
U4	-	AP8822C-24GA	Vdet-IC	2.4V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
U4	-	AP8822C-24GT	Vdet-IC	2.4V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
U4	-	AP8822C-24PA	Vdet-IC	2.4V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
U4	-	AP8822C-24PT	Vdet-IC	2.4V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
U4	-	BCX19R	Si-npn	AF-Drv, 50V, 500mA, 250mW, B=100..600, 200MHz	SOT-23	16te	-	3a	Zx
U4	-	ELM7624LCB	Vdet-IC	2.4V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
U4	-	ELM9744CBB	Vdet-IC	4.4V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
U4	-	RN2105FS	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, R1/R2=2.2k/47k	fSM	19ta	-	3a	Tos
U4	-	SP809EK-4-6	Vdet-IC	4.6V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Sip
U40C	-	SS6680C-40CU	Vdet-IC	4.0V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U40N	-	SS6680N-40CU	Vdet-IC	4.0V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U40P	-	SS6680P-40CU	Vdet-IC	4.0V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U41C	-	SS6680C-41CU	Vdet-IC	4.1V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U41N	-	SS6680N-41CU	Vdet-IC	4.1V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U41P	-	SS6680P-41CU	Vdet-IC	4.1V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U42C	-	SS6680C-42CU	Vdet-IC	4.2V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U42N	-	SS6680N-42CU	Vdet-IC	4.2V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U42P	-	SS6680P-42CU	Vdet-IC	4.2V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U43C	-	SS6680C-43CU	Vdet-IC	4.3V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U43N	-	SS6680N-43CU	Vdet-IC	4.3V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U43P	-	SS6680P-43CU	Vdet-IC	4.3V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U44C	-	SS6680C-44CU	Vdet-IC	4.4V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U44N	-	SS6680N-44CU	Vdet-IC	4.4V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U44P	-	SS6680P-44CU	Vdet-IC	4.4V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U45C	-	SS6680C-45CU	Vdet-IC	4.5V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U45N	-	SS6680N-45CU	Vdet-IC	4.5V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U45P	-	SS6680P-45CU	Vdet-IC	4.5V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U46C	-	SS6680C-46CU	Vdet-IC	4.6V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U46N	-	SS6680N-46CU	Vdet-IC	4.6V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U46P	-	SS6680P-46CU	Vdet-IC	4.6V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U47C	-	SS6680C-47CU	Vdet-IC	4.7V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U47N	-	SS6680N-47CU	Vdet-IC	4.7V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U47P	-	SS6680P-47CU	Vdet-IC	4.7V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U48C	-	SS6680C-48CU	Vdet-IC	4.8V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U48N	-	SS6680N-48CU	Vdet-IC	4.8V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U48P	-	SS6680P-48CU	Vdet-IC	4.8V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U49C	-	SS6680C-49CU	Vdet-IC	4.9V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U49N	-	SS6680N-49CU	Vdet-IC	4.9V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U49P	-	SS6680P-49CU	Vdet-IC	4.9V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U4s	-	BCR114F	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k, 160MHz	TSFP-3	18ta	-	3a	Inf
U4s	-	BCR114T	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k, 160MHz	SOT-416	16ta	-	3a	Inf
U5	-	AP8822C-25GA	Vdet-IC	2.5V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
U5	-	AP8822C-25GT	Vdet-IC	2.5V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
U5	-	AP8822C-25PA	Vdet-IC	2.5V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
U5	-	AP8822C-25PT	Vdet-IC	2.5V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
U5	-	BCX20R	Si-npn	AF, 30V, 500mA, 330mW, B=100..600, >200MHz	SOT-23	16ta	-	3a	Zx
U5	-	ELM7625LCB	Vdet-IC	2.5V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
U5	-	ELM9745CBB	Vdet-IC	4.5V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
U5	-	RN2106FS	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, R1/R2=4.7k/47k	fSM	19ta	-	3a	Tos
U50C	-	SS6680C-50CU	Vdet-IC	5.0V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U50N	-	SS6680N-50CU	Vdet-IC	5.0V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U50P	-	SS6680P-50CU	Vdet-IC	5.0V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U51C	-	SS6680C-51CU	Vdet-IC	5.1V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U51N	-	SS6680N-51CU	Vdet-IC	5.1V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U51P	-	SS6680P-51CU	Vdet-IC	5.1V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U52C	-	SS6680C-52CU	Vdet-IC	5.2V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U52N	-	SS6680N-52CU	Vdet-IC	5.2V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U52P	-	SS6680P-52CU	Vdet-IC	5.2V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U53C	-	SS6680C-53CU	Vdet-IC	5.3V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U53N	-	SS6680N-53CU	Vdet-IC	5.3V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U53P	-	SS6680P-53CU	Vdet-IC	5.3V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U54C	-	SS6680C-54CU	Vdet-IC	5.4V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U54N	-	SS6680N-54CU	Vdet-IC	5.4V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U54P	-	SS6680P-54CU	Vdet-IC	5.4V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U55C	-	SS6680C-55CU	Vdet-IC	5.5V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U55N	-	SS6680N-55CU	Vdet-IC	5.5V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U55P	-	SS6680P-55CU	Vdet-IC	5.5V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U56C	-	SS6680C-56CU	Vdet-IC	5.6V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U56N	-	SS6680N-56CU	Vdet-IC	5.6V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U56P	-	SS6680P-56CU	Vdet-IC	5.6V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U57C	-	SS6680C-57CU	Vdet-IC	5.7V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U57N	-	SS6680N-57CU	Vdet-IC	5.7V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U57P	-	SS6680P-57CU	Vdet-IC	5.7V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U58C	-	SS6680C-58CU	Vdet-IC	5.8V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U58N	-	SS6680N-58CU	Vdet-IC	5.8V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U58P	-	SS6680P-58CU	Vdet-IC	5.8V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U59C	-	SS6680C-59CU	Vdet-IC	5.9V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U59N	-	SS6680N-59CU	Vdet-IC	5.9V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U59P	-	SS6680P-59CU	Vdet-IC	5.9V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U6	-	AP8822C-26GA	Vdet-IC	2.6V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
U6	-	AP8822C-26GT	Vdet-IC	2.6V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
U6	-	AP8822C-26PA	Vdet-IC	2.6V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
U6	-	AP8822C-26PT	Vdet-IC	2.6V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
U6	-	BSS64	Si-npn	GP, 80V, 100mA, 200mW, B=20..80, 100MHz	SOT-23	16ta	-	3a	Kec
U6	-	ELM7626LCB	Vdet-IC	2.6V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
U6	-	ELM9716CBB	Vdet-IC	1.6V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
U6	-	RN2107FS	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, R1/R2=10k/47k	fSM	19ta	-	3a	Tos
U60C	-	SS6680C-60CU	Vdet-IC	6.0V±2.5%, +Reset PPO	SOT-23	16vda	VD7	3a	Ssc
U60N	-	SS6680N-60CU	Vdet-IC	6.0V±2.5%, +Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U60P	-	SS6680P-60CU	Vdet-IC	6.0V±2.5%, -Reset ODO	SOT-23	16vda	VD6	3a	Ssc
U6s	-	BCR164F	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k, 160MHz	TSFP-3	18ta	-	3a	Inf
U6s	-	BCR164T	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k, 160MHz	SOT-416	16ta	-	3a	Inf
U7	-	AP8822C-27GA	Vdet-IC	2.7V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
U7	-	AP8822C-27GT	Vdet-IC	2.7V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
U7	-	AP8822C-27PA	Vdet-IC	2.7V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
U7	-	AP8822C-27PT	Vdet-IC	2.7V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
U7	-	BSR13	Si-npn	HF/Sw, 60V, 800mA, 250mW, B=100..300, 250MHz	SOT-23	16ta	-	3a	Ste
U7	-	ELM7627LCB	Vdet-IC	2.7V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
U7	-	ELM9717CBB	Vdet-IC	1.7V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
U7	-	RN2108FS	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, R1/R2=22k/47k	fSM	19ta	-	3a	Tos
U71	-	BSR13R	Si-npn	HF/Sw, 60V, 800mA, 250mW, B=100..300, 250MHz	SOT-23	16te	-	3a	Ste
U7p	-	BSR13	Si-npn	HF/Sw, 60V, 800mA, 250mW, B=100..300, 250MHz	SOT-23	16ta	-	3a	Phi
U7t	-	BSR13	Si-npn	HF/Sw, 60V, 800mA, 250mW, B=100..300, 250MHz	SOT-23	16ta	-	3a	Phi
U8	-	AP8822C-28GA	Vdet-IC	2.8V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
U8	-	AP8822C-28GT	Vdet-IC	2.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
U8	-	AP8822C-28PA	Vdet-IC	2.8V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
U8	-	AP8822C-28PT	Vdet-IC	2.8V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
U8	-	BSR14	Si-npn	HF/Sw, 75V, 800mA, 250mW, B=100..300, 300MHz	SOT-23	16ta	-	3a	Ste
U8	-	ELM7628LCB	Vdet-IC	2.8V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
U8	-	ELM9718CBB	Vdet-IC	1.8V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
U8	-	RN2109FS	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, R1/R2=47k/22k	fSM	19ta	-	3a	Tos
U81	-	BSR14R	Si-npn	HF/Sw, 75V, 800mA, 250mW, B=100..300, 300MHz	SOT-23	16te	-	3a	Ste
U87	-	CMUT5087E	Si-pnp	GP, 50V, 100mA, 350mW, B=300..900, 100MHz	SOT-523F	18ta	-	3a	Cen
U88	-	CMUT5088E	Si-npn	GP, 50V, 100mA, 350mW, B=300..900, 100MHz	SOT-523F	18ta	-	3a	Cen
U8p	-	BSR14	Si-npn	HF/Sw, 75V, 800mA, 250mW, B=100..300, 300MHz	SOT-23	16ta	-	3a	Phi
U8t	-	BSR14	Si-npn	HF/Sw, 75V, 800mA, 250mW, B=100..300, 300MHz	SOT-23	16ta	-	3a	Phi
U9	-	AP8822C-29GA	Vdet-IC	2.9V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
U9	-	AP8822C-29GT	Vdet-IC	2.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
U9	-	AP8822C-29PA	Vdet-IC	2.9V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
U9	-	AP8822C-29PT	Vdet-IC	2.9V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
U9	-	BSR17	Si-pnp	Sw, 60V, 200mA, 250mW, B=50..150, 300MHz	SOT-23	16ta	-	3a	Phi
U9	-	ELM7629LCB	Vdet-IC	2.9V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
U9	-	ELM9719CBB	Vdet-IC	1.9V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
U9-	-	BZB84-C2V4	Z-diode	Dual, 2.4V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
U91	-	BSR17R	Si-npn	Sw, 60V, 200mA, 250mW, B=50..150, 300MHz	SOT-23	16te	-	3a	Phi
U92	-	BSR17A	Si-npn	Sw, 60V, 200mA, 355mW, B=100..300, 300MHz	SOT-23	16ta	-	3a	Phi
U93	-	BSR17AR	Si-npn	Sw, 60V, 200mA, 355mW, B=100..300, 300MHz	SOT-23	16te	-	3a	Phi
U9p	-	BZB84-C2V4	Z-diode	Dual, 2.4V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
U9t	-	BZB84-C2V4	Z-diode	Dual, 2.4V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
U9W	-	BZB84-C2V4	Z-diode	Dual, 2.4V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UA	-	2SB852K-A	Si-pnp	AF, 40V, 300mA, 200mW, B>1000, >200MHz	SOT-346	16ta	-	3a	Rhm
UA	-	CHT4401WPT	Si-npn	AF, Sw, 40V, 600mA, B=100..300, 250MHz	SOT-323	16ta	-	3a	Chm
UA	-	MMBTA517	Si-npn-Darl	GP, 40V, 400mA, 220MHz, B>30000	SOT-23	16ta	-	3a	Kec
UA-	-	BZB84-C2V7	Z-diode	Dual, 2.7V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UAA	-	BC857A	Si-pnp	GP, 50V, 100mA, 200mW, B=110..220, 150MHz	SOT-23	16ta	-	3a	Auk
UAA	-	BC857FA	Si-pnp	GP, 50V, 100mA, 200mW, B=110..220, 150MHz	SOT-23F	18ta	-	3a	Auk
UAB	-	BC857B	Si-pnp	GP, 50V, 100mA, 200mW, B=200..450, 150MHz	SOT-23	16ta	-	3a	Auk
UAB	-	BC857FB	Si-pnp	GP, 50V, 100mA, 200mW, B=200..450, 150MHz	SOT-23F	18ta	-	3a	Auk
UAC	-	BC857C	Si-pnp	GP, 50V, 100mA, 200mW, B=420..800, 150MHz	SOT-23	16ta	-	3a	Auk
UAC	-	BC857FC	Si-pnp	GP, 50V, 100mA, 200mW, B=420..800, 150MHz	SOT-23F	18ta	-	3a	Auk
UALL	-	MIC809L-LBM3	Vdet-IC	5.0V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
UALM	-	MIC809L-MBM3	Vdet-IC	5.0V±10%, -Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
UALR	-	MIC809L-RBM3	Vdet-IC	2.85V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
UALS	-	MIC809L-SBM3	Vdet-IC	3.3V±10%, -Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
UALT	-	MIC809L-TBM3	Vdet-IC	3.3V±5%, -Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
UANL	-	MIC809N-LBM3	Vdet-IC	5.0V±5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Mcr
UANM	-	MIC809N-MBM3	Vdet-IC	5.0V±10%, -Reset ODO	SOT-23	16vdc	VD6	3a	Mcr
UANR	-	MIC809N-RBM3	Vdet-IC	2.85V±5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Mcr
UANS	-	MIC809N-SBM3	Vdet-IC	3.3V±10%, -Reset ODO	SOT-23	16vdc	VD6	3a	Mcr
UANT	-	MIC809N-TBM3	Vdet-IC	3.3V±5%, -Reset ODO	SOT-23	16vdc	VD6	3a	Mcr
UAp	-	BZB84-C2V7	Z-diode	Dual, 2.7V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UAs	-	BCR149F	Si-npn-Digi	Sw, 50V, 70mA, 250mW, R1=47k, 150MHz	TSFP-3	18ta	-	3a	Inf
UAs	-	BCR149T	Si-npn-Digi	Sw, 50V, 70mA, 250mW, R1=47k, 150MHz	SOT-416	16ta	-	3a	Inf
UAt	-	BZB84-C2V7	Z-diode	Dual, 2.7V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
UAW	-	BZB84-C2V7	Z-diode	Dual, 2.7V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UB	-	2SB852K	Si-pnp-Darl	40V, 300mA, 200mW, 200MHz, B>5000	SC-59	16ta	-	3a	Rhm
UB	-	2SB852K-B	Si-pnp	AF, 40V, 300mA, 200mW, B>5000, >200MHz	SOT-346	16ta	-	3a	Rhm
UB	-	2SC2404-B	Si-npn	RF, AM-FM, 30V, 15mA, 150mW, 650MHz, B=40..110	SC-59	16ta	-	3a	Pan
UB	-	2SC4627-B	Si-npn	FM/AM RF, 30V, 15mA, 125mW, 650MHz, B=40..110	SOT-416	16ta	-	3a	Pan
UB	-	CHT2907WPT	Si-pnp	AF, Sw, 60V, 600mA, B=100..300, 200MHz	SOT-323	16ta	-	3a	Chm
UB	-	CHT4403WPT	Si-pnp	AF, Sw, 40V, 600mA, B=100..300, 200MHz	SOT-323	16ta	-	3a	Chm
UB-	-	BZB84-C3V0	Z-diode	Dual, 3.0V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UBHL	-	MIC810H-LBM3	Vdet-IC	5.0V±5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
UBHM	-	MIC810H-MBM3	Vdet-IC	5.0V±10%, +Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
UBHR	-	MIC810H-RBM3	Vdet-IC	2.85V±5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
UBHS	-	MIC810H-SBM3	Vdet-IC	3.3V±10%, +Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
UBHT	-	MIC810H-TBM3	Vdet-IC	3.3V±5%, +Reset PPO	SOT-23	16vdc	VD7	3a	Mcr
UBp	-	BZB84-C3V0	Z-diode	Dual, 3.0V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UBPL	-	MIC810P-LBM3	Vdet-IC	5.0V±5%, +Reset ODO	SOT-23	16vdc	VD6	3a	Mcr
UBPM	-	MIC810P-MBM3	Vdet-IC	5.0V±10%, +Reset ODO	SOT-23	16vdc	VD6	3a	Mcr
UBPR	-	MIC810P-RBM3	Vdet-IC	2.85V±5%, +Reset ODO	SOT-23	16vdc	VD6	3a	Mcr
UBPS	-	MIC810P-SBM3	Vdet-IC	3.3V±10%, +Reset ODO	SOT-23	16vdc	VD6	3a	Mcr
UBPT	-	MIC810P-TBM3	Vdet-IC	3.3V±5%, +Reset ODO	SOT-23	16vdc	VD6	3a	Mcr
UBs	-	BCR199F	Si-pnp-Digi	Sw, 50V, 70mA, 250mW, R1=47k, 150MHz	TSFP-3	18ta	-	3a	Inf
UBs	-	BCR199T	Si-pnp-Digi	Sw, 50V, 70mA, 250mW, R1=47k, 150MHz	SOT-416	16ta	-	3a	Inf
UBt	-	BZB84-C3V0	Z-diode	Dual, 3.0V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
UBW	-	BZB84-C3V0	Z-diode	Dual, 3.0V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UC	-	2SC2404-C	Si-npn	RF, AM-FM, 30V, 15mA, 150mW, 650MHz, B=65..160	SC-59	16ta	-	3a	Pan
UC	-	2SC3931-C	Si-npn	RF, FM/AM, 30V, 15mA, 150mW, B=65..160, 650MHz	SOT-323	16ta	-	3a	Pan
UC	-	2SC4097PT-P	Si-npn	Sw, 40V, 500mA, 200mW, B=82..180, 250MHz	SOT-323	16ta	-	3a	Chm
UC	-	2SC4627-C	Si-npn	FM/AM RF, 30V, 15mA, 125mW, 650MHz, B=65..160	SOT-416	16ta	-	3a	Pan
UC	-	2SC4627-J	Si-npn	FM/AM RF, 30V, 15mA, 125mW, 650MHz, B=65..160	SC-89	18ta	-	3a	Pan
UC	-	CHT857BTPT-Q	Si-pnp	AF, Sw, 45V, 100mA, B=125..250, 100MHz	SOT-416	16ta	-	3a	Chm
UC-	-	BZB84-C3V3	Z-diode	Dual, 3.3V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UCp	-	BZB84-C3V3	Z-diode	Dual, 3.3V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UCs	-	BCR101F	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k, 100MHz	TSFP-3	18ta	-	3a	Inf
UCs	-	BCR101T	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k, 100MHz	SOT-416	16ta	-	3a	Inf
UCt	-	BZB84-C3V3	Z-diode	Dual, 3.3V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
UCW	-	BZB84-C3V3	Z-diode	Dual, 3.3V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UD	-	2SC2404-D	Si-npn	RF, AM-FM, 30V, 15mA, 150mW, 650MHz, B=100..260	SC-59	16ta	-	3a	Pan
UD	-	2SC2821-D	Si-npn	GP, 20V, 50mA, 150mW, B=250..500, 230MHz	SOT-23	16ta	-	3a	Ren
UD	-	2SC3931-D	Si-npn	RF, FM/AM, 30V, 15mA, 150mW, B=100..260, 650MHz	SOT-323	16ta	-	3a	Pan
UD	-	2SC4627-D	Si-npn	FM/AM RF, 30V, 15mA, 125mW, 650MHz, B=100..260	SOT-416	16ta	-	3a	Pan
UD-	-	BZB84-C3V6	Z-diode	Dual, 3.6V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UDp	-	BZB84-C3V6	Z-diode	Dual, 3.6V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UDs	-	BCR151F	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k, 120MHz	TSFP-3	18ta	-	3a	Inf
UDs	-	BCR151T	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k, 120MHz	SOT-416	16ta	-	3a	Inf
UDt	-	BZB84-C3V6	Z-diode	Dual, 3.6V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
UDW	-	BZB84-C3V6	Z-diode	Dual, 3.6V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UE	-	2SA1577PT-P	Si-pnp	AF, Sw, 32V, 500mA, B=82..180, 200MHz	SOT-323	16ta	-	3a	Chm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UE	-	2SC2821-E	Si-npn	GP, 20V, 50mA, 150mW, B=400..800, 230MHz	SOT-23	16ta	-	3a	Ren
UE-	-	BZB84-C3V9	Z-diode	Dual, 3.9V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UEp	-	BZB84-C3V9	Z-diode	Dual, 3.9V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UEt	-	BZB84-C3V9	Z-diode	Dual, 3.9V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
UEW	-	BZB84-C3V9	Z-diode	Dual, 3.9V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UF	-	2SC2821-F	Si-npn	GP, 20V, 50mA, 150mW, B=600..1200, 230MHz	SOT-23	16ta	-	3a	Ren
UF-	-	BZB84-C4V3	Z-diode	Dual, 4.3V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UFp	-	BZB84-C4V3	Z-diode	Dual, 4.3V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UFt	-	BZB84-C4V3	Z-diode	Dual, 4.3V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
UFW	-	BZB84-C4V3	Z-diode	Dual, 4.3V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UG-	-	BZB84-C4V7	Z-diode	Dual, 4.7V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UGp	-	BZB84-C4V7	Z-diode	Dual, 4.7V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UGt	-	BZB84-C4V7	Z-diode	Dual, 4.7V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
UGW	-	BZB84-C4V7	Z-diode	Dual, 4.7V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UH-	-	BZB84-C5V1	Z-diode	Dual, 5.1V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UHp	-	BZB84-C5V1	Z-diode	Dual, 5.1V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UHt	-	BZB84-C5V1	Z-diode	Dual, 5.1V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
UHW	-	BZB84-C5V1	Z-diode	Dual, 5.1V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UI-	-	2SC4229	Si-npn	HF, 30V, 20mA, 150mW, B=50..180, >700MHz	SOT-346	16ta	-	3a	Ren
UI-	-	2SC4259	Si-npn	HF, 30V, 20mA, 100mW, B=50..180, >700MHz	SOT-323	16ta	-	3a	Ren
UK-	-	BZB84-C5V6	Z-diode	Dual, 5.6V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UKp	-	BZB84-C5V6	Z-diode	Dual, 5.6V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UKt	-	BZB84-C5V6	Z-diode	Dual, 5.6V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
UKW	-	BZB84-C5V6	Z-diode	Dual, 5.6V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UL-	-	BZB84-C6V2	Z-diode	Dual, 6.2V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UL5	-	2SB1295-5	Si-pnp	AF-Amp, 15V, 800mA, 200mW, B=135..270, 200MHz	SOT-23	16ta	-	3a	San
UL6	-	2SB1295-6	Si-pnp	AF-Amp, 15V, 800mA, 200mW, B=200..400, 200MHz	SOT-23	16ta	-	3a	San
UL7	-	2SB1295-7	Si-pnp	AF-Amp, 15V, 800mA, 200mW, B=300..600, 200MHz	SOT-23	16ta	-	3a	San
ULp	-	BZB84-C6V2	Z-diode	Dual, 6.2V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
ULt	-	BZB84-C6V2	Z-diode	Dual, 6.2V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
ULW	-	BZB84-C6V2	Z-diode	Dual, 6.2V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UM-	-	BZB84-C6V8	Z-diode	Dual, 6.8V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UMp	-	BZB84-C6V8	Z-diode	Dual, 6.8V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UMt	-	BZB84-C6V8	Z-diode	Dual, 6.8V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
UMW	-	BZB84-C6V8	Z-diode	Dual, 6.8V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UN-	-	BZB84-C7V5	Z-diode	Dual, 7.5V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UNp	-	BZB84-C7V5	Z-diode	Dual, 7.5V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UNt	-	BZB84-C7V5	Z-diode	Dual, 7.5V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
UNW	-	BZB84-C7V5	Z-diode	Dual, 7.5V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UP-	-	BZB84-C8V2	Z-diode	Dual, 8.2V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UPp	-	BZB84-C8V2	Z-diode	Dual, 8.2V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UPt	-	BZB84-C8V2	Z-diode	Dual, 8.2V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
UPW	-	BZB84-C8V2	Z-diode	Dual, 8.2V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UR-	-	BZB84-C9V1	Z-diode	Dual, 9.2V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
URp	-	BZB84-C9V1	Z-diode	Dual, 9.2V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
URt	-	BZB84-C9V1	Z-diode	Dual, 9.2V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
URW	-	BZB84-C9V1	Z-diode	Dual, 9.2V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
US-	-	BZB84-C10	Z-diode	Dual, 10V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
USp	-	BZB84-C10	Z-diode	Dual, 10V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
USt	-	BZB84-C10	Z-diode	Dual, 10V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
USW	-	BZB84-C10	Z-diode	Dual, 10V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UT	-	2SA1020PT-O	Si-pnp	AF, Sw, 50V, 500mA, B=70..140, 120MHz	SOT-23	16ta	-	3a	Chm
UT-	-	BZB84-C11	Z-diode	Dual, 11V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UT5	-	2SC4555-5	Si-npn	AF, Lo-sat, 20V, 500mA, 150mW, B=135..270, 400MHz	MCP	16ta	-	3a	San
UT5	-	2SC4577-5	Si-npn	AF-Amp, 20V, 500mA, 200mW, B=135..270, 300MHz	SOT-23	16ta	-	3a	San
UT6	-	2SC4555-6	Si-npn	AF, Lo-sat, 20V, 500mA, 150mW, B=200..400, 400MHz	MCP	16ta	-	3a	San
UT6	-	2SC4577-6	Si-npn	AF-Amp, 20V, 500mA, 200mW, B=200..400, 300MHz	SOT-23	16ta	-	3a	San
UT7	-	2SC4555-7	Si-npn	AF, Lo-sat, 20V, 500mA, 150mW, B=300..600, 400MHz	MCP	16ta	-	3a	San
UT7	-	2SC4577-7	Si-npn	AF-Amp, 20V, 500mA, 200mW, B=300..600, 300MHz	SOT-23	16ta	-	3a	San
UTp	-	BZB84-C11	Z-diode	Dual, 11V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UTt	-	BZB84-C11	Z-diode	Dual, 11V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
UTW	-	BZB84-C11	Z-diode	Dual, 11V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UU-	-	BZB84-C12	Z-diode	Dual, 12V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UUp	-	BZB84-C12	Z-diode	Dual, 12V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UUt	-	BZB84-C12	Z-diode	Dual, 12V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
UUW	-	BZB84-C12	Z-diode	Dual, 12V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UV	-	1SV315	Si-diode	Dual, Var.-res, att, 50V, 50mA, 100mW, 0.23pF, 6Ω(100MHz)	MCP	16dl	-	3a	San
UV	-	1SV316	Si-diode	Dual, Var.-res, att, 50V, 50mA, 100mW, 0.23pF, 6Ω(100MHz)	SOT-23	16dl	-	3a	San
UV-	-	BZB84-C13	Z-diode	Dual, 13V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UVp	-	BZB84-C13	Z-diode	Dual, 13V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UVt	-	BZB84-C13	Z-diode	Dual, 13V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
UVW	-	BZB84-C13	Z-diode	Dual, 13V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UW	-	2SC4774GP	Si-npn	RF, Sw, 6V, 50mA, 200mW, B=270..560, 800MHz	SOT-323	16ta	-	3a	Chm
UW-	-	BZB84-C15	Z-diode	Dual, 15V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UWp	-	BZB84-C15	Z-diode	Dual, 15V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
UWt	-	BZB84-C15	Z-diode	Dual, 15V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
UWW	-	BZB84-C15	Z-diode	Dual, 15V±5%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
UX	-	2SC4617PT-Q	Si-npn	AF, Sw, 50V, 150mA, 150mW, B=120..270, 180MHz	SOT-416	16ta	-	3a	Chm
UY	-	2SC3913	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=4k7/4k7	SOT-23	16ta	-	3a	San
UY	-	2SC4617PT-R	Si-npn	AF, Sw, 50V, 150mA, 150mW, B=180..390, 180MHz	SOT-416	16ta	-	3a	Chm
UZ	-	2SC4617PT-S	Si-npn	AF, Sw, 50V, 150mA, 150mW, B=270..560, 180MHz	SOT-416	16ta	-	3a	Chm
v	-	AX6904AA	Vdet-IC	4.63V±1.5%, +Reset PPO	SC-70	16vda	VD7	3b	Axl
V	cr	ELM7520NEB	Vdet-IC	2.0V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
V	cs	ELM7520CEB	Vdet-IC	2.0V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
V0	-	DZ23C2V4	Z-diode	Dual, 2.28..2.52V, Zzt=85Ω, Izt=5mA, 410mW	SOT-23	16dg	-	3a	Pjt
V0	-	ELM7620LBB	Vdet-IC	2.0V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
V0	-	ELM9750CBB	Vdet-IC	5.0V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
V0	-	HBAT-5400	Si-diode	Schottky, TVS, 30V, 220mA, 250mW, <3pF	SOT-23	16dc	-	3a	Agi
V0	-	HBAT-540B	Si-diode	Schottky, TVS, 30V, 430mA, 825mW, <3pF	SOT-323	16dc	-	3a	Agi
V0	-	PRF947	Si-npn	UHF, LN, 20V, 50mA, 250mW, B=50..200, 8.5GHz	SOT-323	16ta	-	3a	Phi
V0	-	PRF949	Si-npn	UHF, LN, 20V, 50mA, 150mW, B=100..200, 9GHz	SOT-416	16ta	-	3a	Phi
V02	-	VN0605T	n-MOSFET	Sw, Amp, 60V, 0.18A, <5Ω(0.5A), <20/20ns	SOT-23	16fh	-	3da	Vs
V05	-	VN0605T	n-MOSFET	Sw, Amp, 60V, 0.18A, <5Ω(0.5A), <20/20ns	SOT-23	16fh	-	3a	Cal
V1	-	1SV160	C-diode	FM-AFC, 15V, 7/14pF(4V), <1.2Ω	SC-59	16dg	-	3a	Tos
V1	-	2SD596-1	Si-npn	AF, 30V, 700mA, 200mW, B=110..180, 170MHz	SOT-23	16ta	-	3a	Nec
V1	-	2SD596A-1	Si-npn	AF, 30V, 700mA, 200mW, B=110..180, 170MHz	SOT-23	16ta	-	3a	Nec
V1	-	2SD780-1	Si-npn	AF, 60V, 300mA, 200mW, B=110..180, 100MHz	SOT-23	16ta	-	3a	Nec
V1	-	DZ23C2V7	Z-diode	Dual, 2.5..2.9V, Izt=5mA, Zzt=75Ω, 300mW	SOT-23	16dg	-	3g	Vs
V1	-	DZ23C2V7-V	Z-diode	Dual, 2.5..2.9V, Zzt=75Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V1	-	ELM7621LBB	Vdet-IC	2.1V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
V1	-	ELM9751CBB	Vdet-IC	5.1V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
V10	-	BFT25A	Si-npn	UHF-A, 8V, 6.5mA, 30mW, B=50..200, >3.5GHz	SOT-23	16ta	-	3a	Phi
V10	-	DZ23C6V2	Z-diode	Dual, 5.8..6.6V, Izt=5mA, Zzt=4.8Ω, 300mW	SOT-23	16dg	-	3g	Vs
V10	-	DZ23C6V2-V	Z-diode	Dual, 5.8..6.6V, Zzt=4.8Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V1010	-	V10P10	Si-diode	TMBSR, 100V, 10A, Vf<0.68V(10A)	TO-277A	76dh	-	3o	Vs
V1012	-	V10P12	Si-diode	TMBSR, 120V, 10A, Vf<0.82V(10A)	TO-277A	76dh	-	3o	Vs
V1045	-	V10P45	Si-diode	TMBSR, 450V, 10A, Vf<0.57V(10A)	TO-277A	76dh	-	3o	Vs
V1045S	-	V10P45S	Si-diode	TMBSR, 450V, 10A, Vf<0.57V(10A)	TO-277A	76dh	-	3o	Vs
V11	-	DZ23C6V8	Z-diode	Dual, 6.4..7.2V, Izt=5mA, Zzt=4.5Ω, 300mW	SOT-23	16dg	-	3g	Vs
V11	-	DZ23C6V8-V	Z-diode	Dual, 6.4..7.2V, Zzt=4.5Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V12	-	DZ23C7V5	Z-diode	Dual, 7.0..7.9V, Izt=5mA, Zzt=4Ω, 300mW	SOT-23	16dg	-	3g	Vs
V12	-	DZ23C7V5-V	Z-diode	Dual, 7..7.9V, Zzt=4Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V1210	-	V12P10	Si-diode	TMBSR, 100V, 12A, Vf<0.7V(12A)	TO-277A	76dh	-	3o	Vs
V1212	-	V12P12	Si-diode	TMBSR, 120V, 12A, Vf<0.7V(12A)	TO-277A	76dh	-	3o	Vs
V13	-	DZ23C8V2	Z-diode	Dual, 7.7..8.7V, Izt=5mA, Zzt=4.5Ω, 300mW	SOT-23	16dg	-	3g	Vs
V13	-	DZ23C8V2-V	Z-diode	Dual, 7.7..8.7V, Zzt=4.5Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V13	-	ZC932TA	C-diode	VHF-Tuning, 12V, 8.5/10.5pF(2.5V)	SOT-23	16dc	-	3a	Zx
V14	-	DZ23C9V1	Z-diode	Dual, 8.5..9.6V, Izt=5mA, Zzt=4.8Ω, 300mW	SOT-23	16dg	-	3g	Vs
V14	-	DZ23C9V1-V	Z-diode	Dual, 8.5..9.6V, Zzt=4.8Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V14	-	ZC931TA	C-diode	VHF-Tuning, 12V, 6.5/7.8pF(2.5V)	SOT-23	16dc	-	3a	Zx
V15	-	DZ23C10	Z-diode	Dual, 9.50..10.50V, Zzt=15Ω, Izt=5mA, 410mW	SOT-23	16dg	-	3a	Pjt
V15	-	DZ23C10-V	Z-diode	Dual, 9.4..10.6V, Izt=5mA, Zzt=5.2Ω, 300mW	SOT-23	16dg	-	3a	Vs
V15	-	ZC930TA	C-diode	VHF-Tuning, 12V, 4.3/5.5pF(2.5V)	SOT-23	16dc	-	3a	Zx
V1545	-	V15P45	Si-diode	TMBSR, 45V, 15A, Vf<0.58V(15A)	TO-277A	76dh	-	3o	Vs
V1545S	-	V15P45S	Si-diode	TMBSR, 45V, 15A, Vf<0.58V(15A)	TO-277A	76dh	-	3o	Vs
V16	-	DZ23C11	Z-diode	Dual, 10.4..11.6V, Izt=5mA, Zzt=6Ω, 300mW	SOT-23	16dg	-	3c	Vs
V16	-	DZ23C11-V	Z-diode	Dual, 10.4..11.6V, Zzt=6Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V16	-	ZC934TA	C-diode	VHF-Tuning, 12V, 40/65pF(2.5V)	SOT-23	16dc	-	3a	Zx
V17	-	DZ23C12	Z-diode	Dual, 11.4..12.7V, Izt=5mA, Zzt=7Ω, 300mW	SOT-23	16dg	-	3c	Vs
V17	-	DZ23C12-V	Z-diode	Dual, 11.4..12.7V, Zzt=7Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V17	-	ZC933TA	C-diode	VHF-Tuning, 12V, 18/27pF(2.5V)	SOT-23	16dc	-	3a	Zx
V18	-	DZ23C13	Z-diode	Dual, 12.4..14.1V, Izt=5mA, Zzt=9Ω, 300mW	SOT-23	16dg	-	3c	Vs
V18	-	DZ23C13-V	Z-diode	Dual, 12.4..14.1V, Zzt=9Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V19	-	DZ23C15	Z-diode	Dual, 13.8..15.6V, Izt=5mA, Zzt=11Ω, 300mW	SOT-23	16dg	-	3c	Vs
V19	-	DZ23C15-V	Z-diode	Dual, 13.8..15.6V, Zzt=11Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V1p	-	BFT25	Si-npn	UHF-A, 8V, 6.5mA, 30mW, B>20, >2.3GHz	SOT-23	16ta	-	3a	Phi
V2	-	2SD596-2	Si-npn	AF, 30V, 700mA, 200mW, B=135..220, 170MHz	SOT-23	16ta	-	3a	Nec
V2	-	2SD596A-2	Si-npn	AF, 30V, 700mA, 200mW, B=135..220, 170MHz	SOT-23	16ta	-	3a	Nec
V2	-	2SD780-2	Si-npn	AF, 60V, 300mA, 200mW, B=135..220, 100MHz	SOT-23	16ta	-	3a	Nec
V2	-	2SK1332-2	n-FET	AF-Amp, 30V, 20mA, 150mW, Idss=0.6..1.5mA	MCP	16fa	-	3a	San

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V2	-	2SK303-2	n-FET	AF-Amp, 30V, 20mA, 200mW, Idss=0.6..1.5mA, Ciss=5pF	SOT-23	16fa	-	3a	San
V2	-	BFQ67	Si-npn	UHF-A, LN, 20V, 50mA, 200mW, B=65..150, 7.5GHz	SOT-23	16ta	-	3a	Sil
V2	-	BFQ67F	Si-npn	UHF-A, LN, 20V, 50mA, 200mW, B=65..150, 7.5GHz	SOT-490	18ta	-	3g	Vs
V2	-	BFQ67W	Si-npn	UHF-A, LN, 20V, 50mA, 200mW, B=65..150, 7.5GHz	SOT-323	16ta	-	3a	Sil
V2	-	DZ23C3V0	Z-diode	Dual, 2.8..3.2V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3g	Vs
V2	-	DZ23C3V0-V	Z-diode	Dual, 2.8..3.2V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V2	-	ELM7622LBB	Vdet-IC	2.2V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
V2	-	ELM9752CBB	Vdet-IC	5.2V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
V2	-	HBAT-5402	Si-diode	Dual, Schottky, TVS, 30V, 220mA(1A..1µs), 250mW, <3pF	SOT-23	16dl	-	3a	Agi
V2	-	HBAT-540C	Si-diode	Dual, Schottky, TVS, 30V, 430mA(1A..1µs), 825mW, <3pF	SOT-323	16dl	-	3a	Agi
V2	-	VN0605T	n-MOSFET	Sw, Amp, 60V, 0.18A, <5Ω(0.5A), <20/20ns	SOT-23	16fh	-	3a	Six
V20	-	DZ23C16	Z-diode	Dual, 15.3..17.1V, Izt=5mA, Zzt=13Ω, 300mW	SOT-23	16dg	-	3c	Vs
V20	-	DZ23C16-V	Z-diode	Dual, 15.3..17.1V, Zzt=13Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V21	-	DZ23C18	Z-diode	Dual, 16.8..19.1V, Izt=5mA, Zzt=18Ω, 300mW	SOT-23	16dg	-	3c	Vs
V21	-	DZ23C18-V	Z-diode	Dual, 16.8..19.1V, Zzt=18Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V22	-	DZ23C20	Z-diode	Dual, 18.8..21.2V, Izt=5mA, Zzt=20Ω, 300mW	SOT-23	16dg	-	3g	Vs
V22	-	DZ23C20-V	Z-diode	Dual, 18.8..21.2V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V23	-	DZ23C22	Z-diode	Dual, 20.8..23.3V, Izt=5mA, Zzt=25Ω, 300mW	SOT-23	16dg	-	3g	Vs
V23	-	DZ23C22-V	Z-diode	Dual, 20.8..23.3V, Zzt=25Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V24	-	DZ23C24	Z-diode	Dual, 22.8..25.6V, Izt=5mA, Zzt=28Ω, 300mW	SOT-23	16dg	-	3g	Vs
V24	-	DZ23C24-V	Z-diode	Dual, 22.8..25.6V, Zzt=28Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V25	-	DZ23C27	Z-diode	Dual, 25.1..28.9V, Izt=5mA, Zzt=30Ω, 300mW	SOT-23	16dg	-	3g	Vs
V25	-	DZ23C27-V	Z-diode	Dual, 25.1..28.9V, Zzt=30Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V25	-	PMBT3640	Si-pnp	HF, Sw, 12V, 80mA, 350mW, B=30..120, >500MHz	SOT-23	16ta	-	3a	Phi
V26	-	DZ23C30	Z-diode	Dual, 28.0..32.0V, Izt=5mA, Zzt=35Ω, 300mW	SOT-23	16dg	-	3g	Vs
V26	-	DZ23C30-V	Z-diode	Dual, 28..32V, Zzt=35Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V27	-	DZ23C33	Z-diode	Dual, 31.0..35.0V, Izt=5mA, Zzt=40Ω, 300mW	SOT-23	16dg	-	3g	Vs
V27	-	DZ23C33-V	Z-diode	Dual, 31..35V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V28	-	DZ23C36	Z-diode	Dual, 34.0..38.0V, Izt=5mA, Zzt=40Ω, 300mW	SOT-23	16dg	-	3g	Vs
V28	-	DZ23C36-V	Z-diode	Dual, 34..38V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V29	-	DZ23C39	Z-diode	Dual, 37.0..41.0V, Izt=5mA, Zzt=50Ω, 300mW	SOT-23	16dg	-	3g	Vs
V29	-	DZ23C39-V	Z-diode	Dual, 37..41V, Zzt=50Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V2p	-	BFQ67	Si-npn	UHF-A, LN, 20V, 50mA, 200mW, B=65..150, 7.5GHz	SOT-23	16ta	-	3a	Phi
V3	-	1SV225	C-diode	Dual, FM-Tuning, 32V, 6.6/7.7pF(30V)	SOT-346	16dg	-	3a	Tos
V3	-	2SD596-3	Si-npn	AF, 30V, 700mA, 200mW, B=170..270, 170MHz	SOT-23	16ta	-	3a	Nec
V3	-	2SD596A-3	Si-npn	AF, 30V, 700mA, 200mW, B=170..270, 170MHz	SOT-23	16ta	-	3a	Nec
V3	-	2SD780-3	Si-npn	AF, 60V, 300mA, 200mW, B=170..270, 100MHz	SOT-23	16ta	-	3a	Nec
V3	-	2SK1332-3	n-FET	AF-Amp, 30V, 20mA, 150mW, Idss=1.2..3mA	MCP	16fa	-	3a	San
V3	-	2SK303-3	n-FET	AF-Amp, 30V, 20mA, 200mW, Idss=1.2..3mA, Ciss=5pF	SOT-23	16fa	-	3a	San
V3	-	APX803-46SA	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Di
V3	-	DZ23C3V3	Z-diode	Dual, 3.1..3.5V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3g	Vs
V3	-	DZ23C3V3-V	Z-diode	Dual, 3.1..3.5V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V3	-	ELM7623LBB	Vdet-IC	2.3V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
V3	-	ELM9753CBB	Vdet-IC	5.3V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
V3	-	HBAT-540E	Si-diode	Dual, Schottky, TVS, 30V, 430mA(1A..1µs), 825mW, <3pF	SOT-323	16df	-	3a	Agi
V30	-	DZ23C43	Z-diode	Dual, 40.0..46.0V, Izt=5mA, Zzt=60Ω, 300mW	SOT-23	16dg	-	3c	Di
V30	-	DZ23C43	Z-diode	Dual, 40.0..46.0V, Izt=5mA, Zzt=60Ω, 300mW	SOT-23	16dg	-	3g	Vs
V30	-	DZ23C43-V	Z-diode	Dual, 40..46V, Zzt=60Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V30	-	PMBTH10	Si-npn	UHF, Sw, 20V, 40mA, 400mW, B>60, 1GHz, <0.7pF	SOT-23	16ta	-	3a	Phi
V31	-	DZ23C47	Z-diode	Dual, 44.0..50.0V, Izt=5mA, Zzt=70Ω, 300mW	SOT-23	16dg	-	3c	Di
V31	-	DZ23C47	Z-diode	Dual, 44.0..50.0V, Izt=5mA, Zzt=70Ω, 300mW	SOT-23	16dg	-	3g	Vs
V31	-	DZ23C47-V	Z-diode	Dual, 44..50V, Zzt=70Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V31	-	PMBTH81	Si-pnp	UHF, Sw, 30V, 40mA, 400mW, B>60, 1GHz, <0.7pF	SOT-23	16ta	-	3a	Phi
V32	-	DZ23C51	Z-diode	Dual, 48.0..54.0V, Izt=5mA, Zzt=70Ω, 300mW	SOT-23	16dg	-	3c	Di
V32	-	DZ23C51	Z-diode	Dual, 48.0..54.0V, Izt=5mA, Zzt=70Ω, 300mW	SOT-23	16dg	-	3g	Vs
V32	-	DZ23C51-V	Z-diode	Dual, 48..54V, Zzt=70Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V33	-	DZ23C56	Z-diode	Dual, 53.20..58.80V, Zzt=135Ω, Izt=2.5mA, 410mW	SOT-23	16dg	-	3a	Pjt
V34	-	DZ23C62	Z-diode	Dual, 58.90..65.10V, Zzt=150Ω, Izt=2.5mA, 410mW	SOT-23	16dg	-	3a	Pjt
V35	-	DZ23C68	Z-diode	Dual, 64.60..71.40V, Zzt=200Ω, Izt=2.5mA, 410mW	SOT-23	16dg	-	3a	Pjt
V36	-	DZ23C75	Z-diode	Dual, 71.25..78.75V, Zzt=250Ω, Izt=2.5mA, 410mW	SOT-23	16dg	-	3a	Pjt
V4	-	1SV228	C-diode	Dual, FM-Tuning, 15V, 12.7pF(8V)	SOT-346	16dg	-	3a	Tos
V4	-	2SD596-4	Si-npn	AF, 30V, 700mA, 200mW, B=200..320, 170MHz	SOT-23	16ta	-	3a	Nec
V4	-	2SD596A-4	Si-npn	AF, 30V, 700mA, 200mW, B=200..320, 170MHz	SOT-23	16ta	-	3a	Nec
V4	-	2SD780-4	Si-npn	AF, 60V, 300mA, 200mW, B=200..320, 100MHz	SOT-23	16ta	-	3a	Nec
V4	-	2SK1332-4	n-FET	AF-Amp, 30V, 20mA, 150mW, Idss=2.5..6mA	MCP	16fa	-	3a	San
V4	-	2SK303-4	n-FET	AF-Amp, 30V, 20mA, 200mW, Idss=2.5..6mA, Ciss=5pF	SOT-23	16fa	-	3a	San
V4	-	APX803-44SA	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Di
V4	-	BFT25R	Si-npn	UHF-A, 8V, 6.5mA, 30mW, B>20, >2.3GHz	SOT-23	16ta	-	3a	Phi
V4	-	DZ23C3V6	Z-diode	Dual, 3.4..3.8V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3g	Vs
V4	-	DZ23C3V6-V	Z-diode	Dual, 3.4..3.8V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V4	-	ELM7624LBB	Vdet-IC	2.4V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
V4	-	ELM9754CBB	Vdet-IC	5.4V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
V4	-	HBAT-540F	Si-diode	Dual, Schottky, TVS, 30V, 430mA(1A..1µs), 825mW, <3pF	SOT-323	16dg	-	3a	Agi
V4	-	SP809NEK-2-3	Vdet-IC	2.3V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Sip
V4-	-	BAP64-06W	PIN-diode	Dual, RF, 100V, 100mA, 250mW, 0.35pF, 3.8Ω(10mA/100MHz)	SOT-323	16df	-	3a	Phi
V5	-	1SV242	C-diode	Dual, VHF/UHF-Tuning, 35V, 2.43/3pF(28V)	SOT-346	16dg	-	3a	Tos
V5	-	2SD596-5	Si-npn	AF, 30V, 700mA, 200mW, B=250..400, 170MHz	SOT-23	16ta	-	3a	Nec
V5	-	2SD596A-5	Si-npn	AF, 30V, 700mA, 200mW, B=250..400, 170MHz	SOT-23	16ta	-	3a	Nec
V5	-	2SD780-5	Si-npn	AF, 60V, 300mA, 200mW, B=250..400, 100MHz	SOT-23	16ta	-	3a	Nec
V5	-	2SK303-5	n-FET	AF-Amp, 30V, 20mA, 200mW, Idss=5..12mA, Ciss=5pF	SOT-23	16fa	-	3a	San
V5	-	APX803-40SA	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Di
V5	-	DZ23C3V9	Z-diode	Dual, 3.7..4.1V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3g	Vs
V5	-	DZ23C3V9-V	Z-diode	Dual, 3.7..4.1V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V5	-	ELM7625LBB	Vdet-IC	2.5V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
V5	-	ELM9755CBB	Vdet-IC	5.5V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
V6	-	APX803-31SA	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Di
V6	-	DZ23C4V3	Z-diode	Dual, 4.0..4.6V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3g	Vs
V6	-	DZ23C4V3-V	Z-diode	Dual, 4..4.6V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V6	-	ELM7626LBB	Vdet-IC	2.6V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
V6-	-	BAP65-05W	PIN-diode	Dual, RF, 30V, 100mA, 240mW, 0.61pF, 0.3Ω(100mA/100MHz)	SOT-323	16dg	-	3a	Phi
V7	-	APX803-29SA	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Di
V7	-	DZ23C4V7	Z-diode	Dual, 4.4..5.0V, Izt=5mA, Zzt=70Ω, 300mW	SOT-23	16dg	-	3g	Vs
V7	-	DZ23C4V7-V	Z-diode	Dual, 4.4..5V, Zzt=70Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V7	-	ELM7627LBB	Vdet-IC	2.7V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
V8	-	APX803-26SA	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Di
V8	-	DZ23C5V1	Z-diode	Dual, 4.8..5.4V, Izt=5mA, Zzt=30Ω, 300mW	SOT-23	16dg	-	3g	Vs
V8	-	DZ23C5V1-V	Z-diode	Dual, 4.8..5.4V, Zzt=30Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V8	-	ELM7628LBB	Vdet-IC	2.8V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
V810	-	V8P10	Si-diode	TMBSR, 100V, 8A, Vf<0.69V(8A)	TO-277A	76dh	-	3o	Vs
V812	-	V8P12	Si-diode	TMBSR, 120V, 8A, Vf<0.84V(8A)	TO-277A	76dh	-	3o	Vs
V9	-	APX803-23SA	Vdet-IC	2.25V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Di
V9	-	DZ23C5V6	Z-diode	Dual, 5.2..6.0V, Izt=5mA, Zzt=10Ω, 300mW	SOT-23	16dg	-	3g	Vs
V9	-	DZ23C5V6-V	Z-diode	Dual, 5.2..6V, Zzt=10Ω, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Vs
V9	-	ELM7629LBB	Vdet-IC	2.9V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
V9-	-	BZB84-B2V4	Z-diode	Dual, 2.4V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
V9p	-	BZB84-B2V4	Z-diode	Dual, 2.4V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
V9t	-	BZB84-B2V4	Z-diode	Dual, 2.4V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
V9W	-	BZB84-B2V4	Z-diode	Dual, 2.4V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VA	-	2SC2776-A	Si-npn	VHF Mix, Osc, 30V, 30mA, 100mW, B=35..70, 320MHz	SOT-23	16ta	-	3a	Ren
VA	-	DZ23C14	Z-diode	Dual, 13.30..14.70V, Zzt=25Ω, Izt=5mA, 410mW	SOT-23	16dg	-	3a	Pjt
VA-	-	BZB84-B2V7	Z-diode	Dual, 2.4V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VAA	-	BC858A	Si-pnp	GP, 30V, 100mA, 200mW, B=110..220, 150MHz	SOT-23	16ta	-	3a	Auk
VAA	-	BC858FA	Si-pnp	GP, 30V, 100mA, 200mW, B=110..220, 150MHz	SOT-23F	18ta	-	3a	Auk
VAB	-	BC858B	Si-pnp	GP, 30V, 100mA, 200mW, B=200..450, 150MHz	SOT-23	16ta	-	3a	Auk
VAB	-	BC858FB	Si-pnp	GP, 30V, 100mA, 200mW, B=200..450, 150MHz	SOT-23F	18ta	-	3a	Auk
VAC	-	BC858C	Si-pnp	GP, 30V, 100mA, 200mW, B=420..800, 150MHz	SOT-23	16ta	-	3a	Auk
VAC	-	BC858FC	Si-pnp	GP, 30V, 100mA, 200mW, B=420..800, 150MHz	SOT-23F	18ta	-	3a	Auk
VAp	-	BZB84-B2V7	Z-diode	Dual, 2.4V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VAt	-	BZB84-B2V7	Z-diode	Dual, 2.4V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VAW	-	BZB84-B2V7	Z-diode	Dual, 2.4V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VB	-	2SC2295-B	Si-npn	HF, 30V, 30mA, 200mW, B=70..140, 300MHz	SOT-23	16ta	-	3a	Pan
VB	-	2SC2776-B	Si-npn	VHF Mix, Osc, 30V, 30mA, 100mW, B=60..120, 320MHz	SOT-23	16ta	-	3a	Ren
VB	-	2SC3930-B	Si-npn	RF, FM/AM, 30V, 30mA, 150mW, B=70..140, 250MHz	SOT-323	16ta	-	3a	Pan
VB	-	2SC4626-B	Si-npn	HF, 30V, 30mA, 125mW, 250MHz, B=70..140	SOT-416	16ta	-	3a	Pan
VB	-	DZ23C17	Z-diode	Dual, 16.15..17.85V, Zzt=40Ω, Izt=5mA, 410mW	SOT-23	16dg	-	3a	Pjt
VB	-	MSC2295-B	Si-npn	GP, 30V, 30mA, 200mW, B=70..140, >150MHz	SC-59	16ta	-	3a	Mot
VB-	-	BZB84-B3V0	Z-diode	Dual, 3.0V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VBp	-	BZB84-B3V0	Z-diode	Dual, 3.0V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VBt	-	BZB84-B3V0	Z-diode	Dual, 3.0V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VBW	-	BZB84-B3V0	Z-diode	Dual, 3.0V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VC	-	2SC2295-C	Si-npn	HF, 30V, 30mA, 200mW, B=110..220, 300MHz	SOT-23	16ta	-	3a	Pan
VC	-	2SC2776-C	Si-npn	VHF Mix, Osc, 30V, 30mA, 100mW, B=100..200, 320MHz	SOT-23	16ta	-	3a	Ren
VC	-	2SC3930-C	Si-npn	RF, FM/AM, 30V, 30mA, 150mW, B=110..220, 250MHz	SOT-323	16ta	-	3a	Pan
VC	-	2SC4626-C	Si-npn	HF, 30V, 30mA, 125mW, 250MHz, B=110..220	SOT-416	16ta	-	3a	Pan
VC	-	CHT857BTPT-R	Si-pnp	AF, Sw, 45V, 100mA, B=220..475, 100MHz	SOT-416	16ta	-	3a	Chm
VC	-	DZ23C28	Z-diode	Dual, 26.60..29.40V, Zzt=80Ω, Izt=5mA, 410mW	SOT-23	16dg	-	3a	Pjt
VC	-	MSC2295-C	Si-npn	GP, 30V, 30mA, 200mW, B=110..220, >150MHz	SC-59	16ta	-	3a	Mot
VC-	-	BZB84-B3V3	Z-diode	Dual, 3.3V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VCp	-	BZB84-B3V3	Z-diode	Dual, 3.3V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VCt	-	BZB84-B3V3	Z-diode	Dual, 3.3V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VCW	-	BZB84-B3V3	Z-diode	Dual, 3.3V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VD-	-	BZB84-B3V6	Z-diode	Dual, 3.6V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VDp	-	BZB84-B3V6	Z-diode	Dual, 3.6V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VDt	-	BZB84-B3V6	Z-diode	Dual, 3.6V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VDW	-	BZB84-B3V6	Z-diode	Dual, 3.6V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VE-	-	BZB84-B3V9	Z-diode	Dual, 3.9V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VEp	-	BZB84-B3V9	Z-diode	Dual, 3.9V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VEt	-	BZB84-B3V9	Z-diode	Dual, 3.9V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VEW	-	BZB84-B3V9	Z-diode	Dual, 3.9V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VF-	-	BZB84-B4V3	Z-diode	Dual, 4.3V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VFp	-	BZB84-B4V3	Z-diode	Dual, 4.3V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VFt	-	BZB84-B4V3	Z-diode	Dual, 4.3V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VFW	-	BZB84-B4V3	Z-diode	Dual, 4.3V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VG	-	2SJ106-GR	p-FET	AF, Sw, 50V, Ig=10mA, 150mW, Idss=2.6..6.5mA	SC-59	16fa	-	3a	Tos
VG	-	2SJ144-GR	p-FET	AF, Sw, 50V, Ig=10mA, 100mW, Idss=2.6..6.5mA	SOT-323	16fa	-	3a	Tos
VG-	-	BZB84-B4V7	Z-diode	Dual, 4.7V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VGp	-	BZB84-B4V7	Z-diode	Dual, 4.7V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VGt	-	BZB84-B4V7	Z-diode	Dual, 4.7V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VGW	-	BZB84-B4V7	Z-diode	Dual, 4.7V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VH-	-	BZB84-B5V1	Z-diode	Dual, 5.1V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VHp	-	BZB84-B5V1	Z-diode	Dual, 5.1V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VHt	-	BZB84-B5V1	Z-diode	Dual, 5.1V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VHW	-	BZB84-B5V1	Z-diode	Dual, 5.1V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VIB	-	2SA1617-B	Si-pnp	GP, 55V, 100mA, B=100..200, 280MHz	SOT-23	16ta	-	3a	Ren
VIC	-	2SA1617-C	Si-pnp	GP, 55V, 100mA, B=160..320, 280MHz	SOT-23	16ta	-	3a	Ren
VJY	-	FM809JP3X	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	F
VJY	-	UM809JP	Vdet-IC	4.0V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VK-	-	BZB84-B5V6	Z-diode	Dual, 5.6V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VK1	-	CHDTA144VKPT	Si-pnp-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/10k	SOT-23	16ta	-	3a	Chm
VKA	-	CHDTC144VKPT	Si-npn-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/10k	SOT-23	16ta	-	3a	Chm
VKp	-	BZB84-B5V6	Z-diode	Dual, 5.6V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VKt	-	BZB84-B5V6	Z-diode	Dual, 5.6V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VKW	-	BZB84-B5V6	Z-diode	Dual, 5.6V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VL	-	2SA1581	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=2.2k	SOT-23	16ta	-	3a	San
VL	-	2SJ106-BL	p-FET	AF, Sw, 50V, Ig=10mA, 150mW, Idss=6..14mA	SC-59	16fa	-	3a	Tos
VL	-	2SJ144-BL	p-FET	AF, Sw, 50V, Ig=10mA, 100mW, Idss=6..14mA	SOT-323	16fa	-	3a	Tos
VL-	-	BZB84-B6V2	Z-diode	Dual, 6.2V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VLp	-	BZB84-B6V2	Z-diode	Dual, 6.2V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VLQ	-	2SC5866-Q	Si-npn	Sw, 60V, 2A, 500mW, B=120..270, 200MHz	TSMT3	16ta	-	3a	Rhm
VLR	-	2SC5866-R	Si-npn	Sw, 60V, 2A, 500mW, B=180..390, 200MHz	TSMT3	16ta	-	3a	Rhm
VLt	-	BZB84-B6V2	Z-diode	Dual, 6.2V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VLW	-	BZB84-B6V2	Z-diode	Dual, 6.2V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VLY	-	FM809LP3X	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	F
VLY	-	UM809LP	Vdet-IC	4.63V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VM-	-	BZB84-B6V8	Z-diode	Dual, 6.8V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VMp	-	BZB84-B6V8	Z-diode	Dual, 6.8V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VMt	-	BZB84-B6V8	Z-diode	Dual, 6.8V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VMW	-	BZB84-B6V8	Z-diode	Dual, 6.8V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VMY	-	FM809MP3X	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	F
VMY	-	UM809MP	Vdet-IC	4.3V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VN-	-	BZB84-B7V5	Z-diode	Dual, 7.5V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VNp	-	BZB84-B7V5	Z-diode	Dual, 7.5V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VNt	-	BZB84-B7V5	Z-diode	Dual, 7.5V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VNW	-	BZB84-B7V5	Z-diode	Dual, 7.5V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VP-	-	BZB84-B8V2	Z-diode	Dual, 8.2V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VPp	-	BZB84-B8V2	Z-diode	Dual, 8.2V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VPt	-	BZB84-B8V2	Z-diode	Dual, 8.2V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VPW	-	BZB84-B8V2	Z-diode	Dual, 8.2V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VR	-	CAT809VTBI-GT3	Vdet-IC	1.60V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
VR-	-	BZB84-B9V1	Z-diode	Dual, 9.1V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VRK	-	UM809XP	Vdet-IC	2.8V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VRM	-	UM809WP	Vdet-IC	3.0V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VRN	-	UM809YP	Vdet-IC	2.7V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VRp	-	BZB84-B9V1	Z-diode	Dual, 9.1V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VRQ	-	UM809AAP	Vdet-IC	2.5V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VRR	-	UM809ABP	Vdet-IC	2.4V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VRt	-	BZB84-B9V1	Z-diode	Dual, 9.1V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VRT	-	UM809ACP	Vdet-IC	2.2V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VRW	-	BZB84-B9V1	Z-diode	Dual, 9.1V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VRY	-	FM809RP3X	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	F

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VRY	-	UM809RP	Vdet-IC	2.63V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VS-	-	BZB84-B10	Z-diode	Dual, 10V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VSJ	-	UM809IP	Vdet-IC	3.9V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VSK	-	UM809KP	Vdet-IC	3.8V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VSL	-	UM809HP	Vdet-IC	4.1V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VSN	-	UM809NP	Vdet-IC	3.7V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VSp	-	BZB84-B10	Z-diode	Dual, 10V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VSP	-	UM809OP	Vdet-IC	3.6V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VSQ	-	2SC5868-Q	Si-npn	Sw, 60V, 500mA, 500mW, B=120..270, 300MHz	TSMT3	16ta	-	3a	Rhm
VSQ	-	2SC5876-Q	Si-npn	Sw, 60V, 500mA, 200mW, B=120..270, 300MHz	UMT3	16ta	-	3a	Rhm
VSQ	-	UM809PP	Vdet-IC	3.5V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VSR	-	2SC5868-R	Si-npn	Sw, 60V, 500mA, 500mW, B=180..390, 300MHz	TSMT3	16ta	-	3a	Rhm
VSR	-	2SC5876-R	Si-npn	Sw, 60V, 500mA, 200mW, B=180..390, 300MHz	UMT3	16ta	-	3a	Rhm
VSR	-	UM809QP	Vdet-IC	3.4V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VSS	-	UM809UP	Vdet-IC	3.3V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VSt	-	BZB84-B10	Z-diode	Dual, 10V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VST	-	UM809VP	Vdet-IC	3.2V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VSW	-	BZB84-B10	Z-diode	Dual, 10V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VSY	-	FM809SP3X	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	F
VSY	-	UM809SP	Vdet-IC	2.93V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VT	-	CHT5401PT	Si-pnp	AF, Drv, 150V, 200mA, B=60..240, 300MHz	SOT-23	16ta	-	3a	Chm
VT-	-	BZB84-B11	Z-diode	Dual, 11V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VT5	-	2SC4639-5	Si-npn	GP, 55V, 150mA, 200mW, 200MHz, B=135..270	CP	16ta	-	3a	San
VT6	-	2SC4639-6	Si-npn	GP, 55V, 150mA, 200mW, 200MHz, B=200..400	CP	16ta	-	3a	San
VT7	-	2SC4639-7	Si-npn	GP, 55V, 150mA, 200mW, 200MHz, B=300..600	CP	16ta	-	3a	San
VTJ	-	UM809BP	Vdet-IC	4.9V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VTK	-	UM809CP	Vdet-IC	4.8V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VTM	-	UM809AP	Vdet-IC	5.0V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VTN	-	UM809DP	Vdet-IC	4.7V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VTp	-	BZB84-B11	Z-diode	Dual, 11V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VTQ	-	UM809EP	Vdet-IC	4.5V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VTS	-	UM809FP	Vdet-IC	4.3V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VTt	-	BZB84-B11	Z-diode	Dual, 11V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VTT	-	UM809GP	Vdet-IC	4.2V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VTW	-	BZB84-B11	Z-diode	Dual, 11V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VTY	-	FM809TP3X	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-323	16vdc	VD7	3a	F
VTY	-	UM809TP	Vdet-IC	3.08V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VU-	-	BZB84-B12	Z-diode	Dual, 12V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VUA	-	CHDTC144VUPT	Si-npn-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/10k	SOT-323	16ta	-	3a	Chm
VUp	-	BZB84-B12	Z-diode	Dual, 12V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VUQ	-	2SC5865-Q	Si-npn	Sw, 60V, 1A, 500mW, B=120..270, 250MHz	TSMT3	16ta	-	3a	Rhm
VUR	-	2SC5865-R	Si-npn	Sw, 60V, 1A, 500mW, B=180..390, 250MHz	TSMT3	16ta	-	3a	Rhm
VUt	-	BZB84-B12	Z-diode	Dual, 12V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VUW	-	BZB84-B12	Z-diode	Dual, 12V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VV-	-	BZB84-B13	Z-diode	Dual, 13V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VVp	-	BZB84-B13	Z-diode	Dual, 13V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VVt	-	BZB84-B13	Z-diode	Dual, 13V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VVW	-	BZB84-B13	Z-diode	Dual, 13V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VW	-	SiP6332R18D2	Vdet-IC	1.8V±1.5%, -Reset PPO 30ms	SOT-23	16vdc	VD7	3g	Vs
VW-	-	BZB84-B15	Z-diode	Dual, 15V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VWp	-	BZB84-B15	Z-diode	Dual, 15V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhH
VWt	-	BZB84-B15	Z-diode	Dual, 15V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhM
VWW	-	BZB84-B15	Z-diode	Dual, 15V±2%, If=200mA, 300mW	SOT-23	16df	-	3a	PhC
VY	-	2SC3914	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=2k2/10k	SOT-23	16ta	-	3a	San
VY	-	2SJ106-Y	p-FET	AF, Sw, 50V, Ig=10mA, 150mW, Idss=1.2..3mA	SC-59	16fa	-	3a	Tos
VY	-	2SJ144-Y	p-FET	AF, Sw, 50V, Ig=10mA, 100mW, Idss=1.2..3mA	SOT-323	16fa	-	3a	Tos
VZL	-	UM809ADP	Vdet-IC	2.1V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VZM	-	UM809AEP	Vdet-IC	2.0V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
VZY	-	UM809ZP	Vdet-IC	2.32V±1%, -Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
w	-	AX6904BA	Vdet-IC	4.38V±1.5%, +Reset PPO	SC-70	16vda	VD7	3b	Axl
W	cr	ELM7521NEB	Vdet-IC	2.1V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
W	cs	ELM7521CEB	Vdet-IC	2.1V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
W0	-	AP8822C-30GA	Vdet-IC	3.0V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
W0	-	AP8822C-30GT	Vdet-IC	3.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
W0	-	AP8822C-30PA	Vdet-IC	3.0V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
W0	-	AP8822C-30PT	Vdet-IC	3.0V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
W0	-	ELM7630LBB	Vdet-IC	3.0V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
W0	-	ELM9730CBB	Vdet-IC	3.0V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
W01	-	PDTA143ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3a	NxC
W01	-	PDTA143EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3a	NxC



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
W02	-	PDTC143ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k	SOT-23	16ta	-	3a	NxC
W02	-	PDTC143EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3a	NxC
W03	-	PDTA114ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k	SOT-23	16ta	-	3a	NxC
W03	-	PDTA114EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SOT-323	16ta	-	3a	NxC
W04	-	BZX84-A11	Z-diode	11V±1%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W04	-	PMSS3904	Si-npn	GP, 60V, 100mA, 200mW, B=100..300, >180MHz	SOT-323	16ta	-	3a	PhC
W05	-	PDTA124ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k	SOT-23	16ta	-	3a	NxC
W05	-	PDTA124EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SOT-323	16ta	-	3a	NxC
W06	-	PDTC124EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SOT-323	16ta	-	3a	NxC
W06	-	PMSS3906	Si-pnp	GP, 60V, 100mA, 200mW, B=100..300, >150MHz	SOT-323	16ta	-	3a	PhC
W07	-	PDTA144ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/47k	SOT-23	16ta	-	3a	NxC
W07	-	PDTA144EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SOT-323	16ta	-	3a	NxC
W08	-	PDTC144ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/47k	SOT-23	16ta	-	3a	NxC
W08	-	PDTC144EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SOT-323	16ta	-	3a	NxC
W09	-	PDTC114EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SOT-323	16ta	-	3a	NxC
W1	-	AP1701GTW	Vdet-IC	2.25V±1.5%, -Reset PPO	TSOT-23-3L	16vdc	VD7	3b	Ana
W1	-	AP1701GW	Vdet-IC	2.25V±1.5%, -Reset PPO	SOT-23-3L	16vdc	VD7	3b	Ana
W1	-	AP8822C-31GA	Vdet-IC	3.1V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
W1	-	AP8822C-31GT	Vdet-IC	3.1V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
W1	-	AP8822C-31PA	Vdet-IC	3.1V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
W1	-	AP8822C-31PT	Vdet-IC	3.1V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
W1	-	BZX84B2V4	Z-diode	2.35..2.45V, Zzt=100Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
W1	-	BZX84C2V4	Z-diode	2.28..2.52V, Zzt=100Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
W1	-	BZX84C2V4W	Z-diode	2.2..2.6V, Zzt=100Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
W1	-	ELM7631LBB	Vdet-IC	3.1V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
W1	-	ELM9731CBB	Vdet-IC	3.1V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
W1	-	TZTC2V4WS	Z-diode	2.28..2.52V, Izt=5mA, Zzt=100Ω, 200mW	SOT-323	16dc	-	3a	Ttr
W10	-	CMPZDA27V	Z-diode	Dual, 27V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
W11	-	CMPZDA30V	Z-diode	Dual, 30V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
W11	-	PDTA114TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=10k	SOT-23	16ta	-	3a	NxC
W11	-	PDTA115TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=100k	SOT-323	16ta	-	3a	NxC
W12	-	CMPZDA33V	Z-diode	Dual, 33V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
W12	-	PDTA144VU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	SOT-323	16ta	-	3a	NxC
W12	-	PDTC114TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=10k	SOT-23	16ta	-	3a	NxC
W13	-	CMPZDA36V	Z-diode	Dual, 36V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
W13	-	PDTA123YU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	SOT-323	16ta	-	3a	NxC
W14	-	CMPZDA39V	Z-diode	Dual, 39V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
W14	-	PDTA113EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=1k/1k	SOT-323	16ta	-	3a	NxC
W15	-	CMPZDA43V	Z-diode	Dual, 43V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
W15	-	PDTA113ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxC
W15	-	PDTC115EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	SOT-323	16ta	-	3a	NxC
W16	-	CMPZDA47V	Z-diode	Dual, 47V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
W16	-	PDTA113ZU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=1k/10k	SOT-323	16ta	-	3a	NxC
W16	-	PDTC114ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k	SOT-23	16ta	-	3a	NxC
W17	-	PDTC115TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=100k	SOT-323	16ta	-	3a	NxC
W17	-	PDTC124ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k	SOT-23	16ta	-	3a	NxC
W18	-	PDTC143ZT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k	SOT-23	16ta	-	3a	NxC
W18	-	PDTC144VU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	SOT-323	16ta	-	3a	NxC
W19	-	PDTA143ZT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k	SOT-23	16ta	-	3a	NxC
W19	-	PDTC123YU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	SOT-323	16ta	-	3a	NxC
W1A	-	PMBT3904	Si-npn	Sw, 60V, 100mA, 250mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	PhC
W1A	-	PMST3904	Si-npn	GP, 60V, 200mA, 200mW, B=60..300, >300MHz	SOT-323	16ta	-	3a	PhC
W1B	-	PMBT2222	Si-npn	Sw, 60V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	PhC
W1B	-	PMST2222	Si-npn	Sw, 60V, 600mA, 200mW, B=120..300, >300MHz	SOT-323	16ta	-	3a	PhC
W1D	-	PMBTA42	Si-npn	Vid, 300/300V, 100mA, 250mW, B>25, >50MHz	SOT-23	16ta	-	3a	PhC
W1D	-	PMSTA42	Si-npn	Vid, 300/300V, 100mA, 200mW, B>25, >50MHz	SOT-323	16ta	-	3a	PhC
W1E	-	PMBTA43	Si-npn	Vid, 200/200V, 100mA, 250mW, B>25, >50MHz	SOT-23	16ta	-	3a	PhC
W1E	-	PMSTA43	Si-npn	Vid, 200/200V, 100mA, 200mW, B>25, >50MHz	SOT-323	16ta	-	3a	PhC
W1F	-	PMBT5550	Si-npn	HV, 160V, 300mA, 250mW, B=60..250, 100..300MHz	SOT-23	16ta	-	3a	PhC
W1F	-	PMST5550	Si-npn	HV, 160V, 300mA, 200mW, B=60..250, 100..300MHz	SOT-323	16ta	-	3a	PhC
W1G	-	PMBTA06	Si-npn	GP, 80V, 500mA, 250mW, B>100, >100MHz	SOT-23	16ta	-	3a	PhC
W1G	-	PMSTA06	Si-npn	GP, 80V, 500mA, 200mW, B>50, >100MHz	SOT-323	16ta	-	3a	PhC
W1H	-	PMBTA05	Si-npn	GP, 60V, 500mA, 250mW, B>100, >100MHz	SOT-23	16ta	-	3a	PhC
W1H	-	PMSTA05	Si-npn	GP, 60V, 500mA, 200mW, B>50, >100MHz	SOT-323	16ta	-	3a	PhC
W1J	-	PMBT2369	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120, >500MHz	SOT-23	16ta	-	3a	PhC
W1J	-	PMST2369	Si-npn	Sw, 40V, 200mA, 200mW, B=40..120, >500MHz	SOT-323	16ta	-	3a	PhC
W1K	-	PMBT6428	Si-npn	GP, AF, 60V, 100mA, 250mW, B>250..650, 100..700MHz	SOT-23	16ta	-	3a	PhC
W1K	-	PMST6428	Si-npn	GP, Hi-beta, 60V, 100mA, 200mW, B=250..650, 100..700MHz	SOT-323	16ta	-	3a	PhC
W1L	-	PMBT6429	Si-npn	GP, AF, 55V, 100mA, 250mW, B>500..1250, 100..700MHz	SOT-23	16ta	-	3a	PhC
W1L	-	PMST6429	Si-npn	GP, Hi-beta, 55V, 100mA, 200mW, B=250..650, 100..700MHz	SOT-323	16ta	-	3a	PhC



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
W1M	-	PMBTA13	Si-npn-Darl	GP, 30V, 500mA, 250mW, B>5000, >125MHz	SOT-23	16ta	-	3a	PhC
W1N	-	PMBTA14	Si-npn-Darl	GP, 30V, 500mA, 250mW, B>10000, >125MHz	SOT-23	16ta	-	3a	PhC
W1p	-	BFT92	Si-pnp	UHF-A, 20V, 25mA, 300mW, B~50, 5GHz	SOT-23	16ta	-	3a	PhH
W1p	-	BFT92W	Si-pnp	UHF-A, 20V, 25mA, 300mW, B~50, 5GHz	SOT-323	16ta	-	3a	PhH
W1P	-	PMBT2222A	Si-npn	Sw, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	PhC
W1P	-	PMST2222A	Si-npn	Sw, 75V, 600mA, 200mW, B=120..300, >300MHz	SOT-323	16ta	-	3a	PhC
W1Q	-	PMBT5088	Si-npn	GP, AF, 30V, 200mA, 325mW, B>500, 160MHz	SOT-23	16ta	-	3a	PhC
W1Q	-	PMST5088	Si-npn	GP, 35V, 100mA, 200mW, B=300..900, >100MHz	SOT-323	16ta	-	3a	PhC
W1R	-	PMST5089	Si-npn	GP, 30V, 100mA, 200mW, B=400..1200, >100MHz	SOT-323	16ta	-	3a	PhC
W1s	-	BFT92W	Si-pnp	UHF-A, 20V, 25mA, 5GHz	SOT-323	16ta	-	3a	Sie
W1S	-	PDTA123TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=2.2k	SOT-323	16ta	-	3a	NxC
W1t	-	BFT92	Si-pnp	UHF-A, 20V, 25mA, 300mW, B~50, 5GHz	SOT-23	16ta	-	3a	PhH
W1t	-	BFT92W	Si-pnp	UHF-A, 20V, 25mA, 300mW, B~50, 5GHz	SOT-323	16ta	-	3a	PhH
W1T	-	PDTC123TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=2.2k	SOT-323	16ta	-	3a	NxC
W1T	-	PDTD123TT	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1=2.2k	SOT-23	16ta	-	3a	NxC
W1U	-	PDTB123TT	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1=2.2k	SOT-23	16ta	-	3a	NxC
W1W	-	BFT92	Si-pnp	UHF-A, 20V, 25mA, 300mW, B~50, 5GHz	SOT-23	16ta	-	3a	PhC
W1W	-	BFT92W	Si-pnp	UHF-A, 20V, 25mA, 300mW, B~50, 5GHz	SOT-323	16ta	-	3a	PhC
W2	-	AP1702GTW	Vdet-IC	2.25V±1.5%, +Reset PPO	TSOT-23-3L	16vdc	VD7	3b	Ana
W2	-	AP1702GW	Vdet-IC	2.25V±1.5%, +Reset PPO	SOT-23-3L	16vdc	VD7	3b	Ana
W2	-	AP8822C-32GA	Vdet-IC	3.2V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
W2	-	AP8822C-32GT	Vdet-IC	3.2V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
W2	-	AP8822C-32PA	Vdet-IC	3.2V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
W2	-	AP8822C-32PT	Vdet-IC	3.2V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
W2	-	BZX84B2V7	Z-diode	2.64..2.75V, Zzt=100Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
W2	-	BZX84C2V7	Z-diode	2.5..2.9V, Zzt=100Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
W2	-	BZX84C2V7W	Z-diode	2.5..2.9V, Zzt=100Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
W2	-	ELM7632LBB	Vdet-IC	3.2V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
W2	-	ELM9732CBB	Vdet-IC	3.2V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
W2	-	PRF957	Si-npn	UHF, LN, 20V, 100mA, 270mW, B=50..200, 8.5GHz	SOT-323	16ta	-	3a	Phi
W2	-	TZTC2V7WS	Z-diode	2.57..2.84V, Izt=5mA, Zzt=100Ω, 200mW	SOT-323	16dc	-	3a	Ttr
W20	-	PDTC144WT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/22k	SOT-23	16ta	-	3a	NxC
W20	-	PDTC144WU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	SOT-323	16ta	-	3a	NxC
W21	-	PDTA123ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxC
W23	-	PDTA114TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=10k	SOT-323	16ta	-	3a	NxC
W23	-	PDTA123JT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k	SOT-23	16ta	-	3a	NxC
W24	-	PDTC114TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=10k	SOT-323	16ta	-	3a	NxC
W26	-	PDTC123ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxC
W26	-	PDTC123JT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k	SOT-23	16ta	-	3a	NxC
W27	-	PDTC114YT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k	SOT-23	16ta	-	3a	NxC
W28	-	PDTA144WU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	SOT-323	16ta	-	3a	NxC
W29	-	PDTA114YT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k	SOT-23	16ta	-	3a	NxC
W2A	-	PMBT3906	Si-pnp	Sw, 40V, 100mA, 250mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	PhC
W2A	-	PMST3906	Si-pnp	GP, 60V, 100mA, 200mW, B=60..300, >250MHz	SOT-323	16ta	-	3a	PhC
W2B	-	PMBT2907	Si-pnp	GP, 40V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	PhC
W2D	-	PMBTA92	Si-pnp	Vid, 300/300V, 500mA, 250mW, B=25, >50MHz	SOT-23	16ta	-	3a	PhC
W2D	-	PMSTA92	Si-pnp	Vid, 300/300V, 500mA, 200mW, B=25, >50MHz	SOT-323	16ta	-	3a	PhC
W2E	-	PMBTA93	Si-pnp	Vid, 200/200V, 500mA, 250mW, B=25, >50MHz	SOT-23	16ta	-	3a	PhC
W2E	-	PMSTA93	Si-pnp	Vid, 200/200V, 500mA, 330mW, B=25, >50MHz	SOT-323	16ta	-	3a	PhC
W2F	-	PMBT2907A	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	PhC
W2F	-	PMST2907A	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-323	16ta	-	3a	PhC
W2G	-	PMBTA56	Si-pnp	AF-Drv, 80V, 500mA, 250mW, B>100, >50MHz	SOT-23	16ta	-	3a	PhC
W2G	-	PMSTA56	Si-pnp	AF-Drv, 80V, 500mA, 200mW, B>100, >50MHz	SOT-323	16ta	-	3a	PhC
W2H	-	PMBTA55	Si-pnp	AF-Drv, 60V, 500mA, 250mW, B>100, >50MHz	SOT-23	16ta	-	3a	PhC
W2H	-	PMSTA55	Si-pnp	AF-Drv, 60V, 500mA, 200mW, B>100, >50MHz	SOT-323	16ta	-	3a	PhC
W2L	-	PMBT5401	Si-pnp	HV, 160V, 300mA, 250mW, B=60..240, 100..300MHz	SOT-23	16ta	-	3a	PhC
W2L	-	PMST5401	Si-pnp	HV, 160V, 300mA, 200mW, B=60..240, 100..300MHz	SOT-323	16ta	-	3a	PhC
W2s	-	BCR189	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=22k, 200MHz	SOT-23	16ta	-	3c	Inf
W2s	-	BCR189F	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=22k, 150MHz	TSFP-3	18ta	-	3a	Inf
W2s	-	BCR189T	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k, 150MHz	SOT-416	16ta	-	3a	Inf
W2T	-	PMBT4403	Si-pnp	Sw, 40V, 600mA, 250mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	PhC
W2T	-	PMST4403	Si-pnp	GP, 40V, 600mA, 200mW, B=100..300, >200MHz	SOT-323	16ta	-	3a	PhC
W2U	-	PMBTA63	Si-pnp-Darl	GP, 30V, 500mA, 250mW, B>5000, >125MHz	SOT-23	16ta	-	3a	PhC
W2V	-	PMBTA64	Si-pnp-Darl	GP, 30V, 500mA, 250mW, B>10000, >125MHz	SOT-23	16te	-	3a	PhC
W2X	-	PMBT4401	Si-npn	Sw, 60V, 600mA, 250mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	PhC
W2X	-	PMST4401	Si-npn	Sw, 60V, 600mA, 200mW, B=100..300, >250MHz	SOT-323	16ta	-	3a	PhC
W3	-	AP1703GTW	Vdet-IC	2.25V±1.5%, -Reset PPO	TSOT-23-3L	16vda	VD7	3b	Ana
W3	-	AP1703GW	Vdet-IC	2.25V±1.5%, -Reset PPO	SOT-23-3L	16vda	VD7	3b	Ana
W3	-	AP8822C-33GA	Vdet-IC	3.3V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
W3	-	AP8822C-33GT	Vdet-IC	3.3V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
W3	-	AP8822C-33PA	Vdet-IC	3.3V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
W3	-	AP8822C-33PT	Vdet-IC	3.3V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
W3	-	BZX84B3	Z-diode	2.94..3.06V, Zzt=95Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
W3	-	BZX84C2V4	Z-diode	2.2..2.6V, Zzt=100Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
W3	-	BZX84C3	Z-diode	2.8..3.2V, Zzt=95Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
W3	-	BZX84C3V0	Z-diode	2.8..3.2V, Zzt=95Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
W3	-	BZX84C3W	Z-diode	2.8..3.2V, Zzt=95Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
W3	-	ELM7633LBB	Vdet-IC	3.3V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
W3	-	ELM9733CBB	Vdet-IC	3.3V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
W3	-	KDV1471	C-diode	FM-Tuning, 16V, 32/37pF(1V)	SOT-23	16dc	-	3a	Kec
W3	-	TZTC3V0WS	Z-diode	2.85..3.15V, Izt=5mA, Zzt=95Ω, 200mW	SOT-323	16dc	-	3a	Ttr
W30	-	PDTC114YU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	SOT-323	16ta	-	3a	NxC
W31	-	PDTA143XT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k	SOT-23	16ta	-	3a	NxC
W32	-	PDTC143XT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k	SOT-23	16ta	-	3a	NxC
W33	-	PDTC143TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k	SOT-23	16ta	-	3a	NxC
W3W	-	CMSZDA2V4	Z-diode	Dual, 2.2..2.6V, Zzt=100Ω, 63mA, 275mW	SOT-323	16df	-	3a	Cen
W4	-	AP1704GTW	Vdet-IC	2.25V±1.5%, +Reset PPO	TSOT-23-3L	16vda	VD7	3b	Ana
W4	-	AP1704GW	Vdet-IC	2.25V±1.5%, +Reset PPO	SOT-23-3L	16vda	VD7	3b	Ana
W4	-	AP8822C-34GA	Vdet-IC	3.4V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
W4	-	AP8822C-34GT	Vdet-IC	3.4V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
W4	-	AP8822C-34PA	Vdet-IC	3.4V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
W4	-	AP8822C-34PT	Vdet-IC	3.4V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
W4	-	BZX84B3V3	Z-diode	3.23..3.37V, Zzt=95Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
W4	-	BZX84C2V7	Z-diode	2.5..2.9V, Zzt=100Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
W4	-	BZX84C3V3	Z-diode	3.1..3.5V, Zzt=95Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
W4	-	BZX84C3V3W	Z-diode	3.1..3.5V, Zzt=95Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
W4	-	BZX88-C2V7	Z-diode	2.7V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
W4	-	ELM7634LBB	Vdet-IC	3.4V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
W4	-	ELM9734CBB	Vdet-IC	3.4V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
W4	-	SP809NEK-2-6	Vdet-IC	2.6V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Sip
W4	-	TZTC3V3WS	Z-diode	3.14..3.47V, Izt=5mA, Zzt=95Ω, 200mW	SOT-323	16dc	-	3a	Ttr
W4-	-	BAP50-05W	PIN-diode	Dual, RF, 50V, 50mA, 500mW, 0.3pF, 3Ω(10mA/100MHz)	SOT-323	16dg	-	3a	Phi
W41	-	PDTC144TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=47k	SOT-23	16ta	-	3a	NxC
W41	-	PDTC144TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=47k	SOT-323	16ta	-	3a	NxC
W42	-	PDTA123EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	SOT-323	16ta	-	3a	NxC
W42	-	PDTA143TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k	SOT-23	16ta	-	3a	NxC
W43	-	PDTA123JU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	SOT-323	16ta	-	3a	NxC
W43	-	PDTA144WT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/22k	SOT-23	16ta	-	3a	NxC
W44	-	PDTC115ET	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k	SOT-23	16ta	-	3a	NxC
W45	-	PDTA143TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=4.7k	SOT-323	16ta	-	3a	NxC
W45	-	PDTC124TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=22k	SOT-23	16ta	-	3a	NxC
W46	-	PDTA143XU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	SOT-323	16ta	-	3a	NxC
W46	-	PDTC124XT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k	SOT-23	16ta	-	3a	NxC
W47	-	PDTA124XT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k	SOT-23	16ta	-	3a	NxC
W47	-	PDTA143ZU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	SOT-323	16ta	-	3a	NxC
W48	-	PDTC123EU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	SOT-323	16ta	-	3a	NxC
W48	-	PDTC123JU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	SOT-323	16ta	-	3a	NxC
W4F	-	PMBD353	Si-diode	Dual, Schottky Barrier, 4V, 30mA, Vf<600mV(10mA), <1pF	SOT-23	16ea	-	3a	PhC
W4W	-	BAP50-05W	PIN-diode	Dual, RF, 50V, 50mA, 500mW, 0.3pF, 3Ω(10mA/100MHz)	SOT-323	16dg	-	3a	PhC
W4W	-	CMSZDA2V7	Z-diode	Dual, 2.5..2.9V, Zzt=100Ω, 57mA, 275mW	SOT-323	16df	-	3a	Cen
W5	-	AP8822C-35GA	Vdet-IC	3.5V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
W5	-	AP8822C-35GT	Vdet-IC	3.5V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
W5	-	AP8822C-35PA	Vdet-IC	3.5V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
W5	-	AP8822C-35PT	Vdet-IC	3.5V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
W5	-	BZX84B3V6	Z-diode	3.52..3.67V, Zzt=90Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
W5	-	BZX84C3V0	Z-diode	2.8..3.2V, Zzt=95Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
W5	-	BZX84C3V6	Z-diode	3.4..3.8V, Zzt=90Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
W5	-	BZX84C3V6W	Z-diode	3.4..3.8V, Zzt=90Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
W5	-	BZX88-C3V0	Z-diode	3V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
W5	-	ELM7635LBB	Vdet-IC	3.5V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
W5	-	ELM9735CBB	Vdet-IC	3.5V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
W5	-	TZTC3V6WS	Z-diode	3.42..3.78V, Izt=5mA, Zzt=90Ω, 200mW	SOT-323	16dc	-	3a	Ttr
W50	-	BZX84-A2V4	Z-diode	2.4V±1%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W50	-	PDTC124TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=22k	SOT-323	16ta	-	3a	NxC
W51	-	BZX84-A2V7	Z-diode	2.7V±1%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W51	-	PDTC124XU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	SOT-323	16ta	-	3a	NxC
W52	-	BZX84-A3V0	Z-diode	3.0V±1%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W52	-	PDTC143TU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=4.7k	SOT-323	16ta	-	3a	NxC
W52	-	S852TW	Si-npn	RF, LN, 12V, 8mA, 40mW, B=40..150, 5.2GHz	SOT-323	16ta	-	3a	Tfk
W53	-	PDTC143XU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	SOT-323	16ta	-	3a	NxC



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
W54	-	PDTC143ZU	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	SOT-323	16ta	-	3a	NxC
W55	-	BZX84-A3V9	Z-diode	3.9V±1%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W55	-	PDTA114YU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	SOT-323	16ta	-	3a	NxC
W56	-	BZX84-A4V3	Z-diode	4.3V±1%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W57	-	BZX84-A4V7	Z-diode	4.7V±1%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W58	-	BZX84-A5V1	Z-diode	5.1V±1%, Zzt=60Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W59	-	BZX84-A5V6	Z-diode	5.6V±1%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W5A	-	PMBD6050	Si-diode	Sw, Hi-sp, 75V, 215mA, Vf<1.25V(150mA), <4ns	SOT-23	16dc	-	3a	PhC
W5B	-	PMBD6100	Si-diode	Dual, Sw, Hi-sp, 70V, 215mA, Vf<1.1V(100mA), <4ns	SOT-23	16dg	-	3a	PhC
W5C	-	PMBD7000	Si-diode	Dual, Sw, Hi-sp, 100V, 215mA, Vf<1.25V(150mA), <4ns	SOT-23	16dl	-	3a	PhC
W5D	-	PMBD914	Si-diode	Sw, Fast, 70V, 215mA, 250mW, <4ns	SOT-23	16dc	-	3a	PhC
W5W	-	CMSZDA3V0	Z-diode	Dual, 2.8..3.2V, Zzt=95Ω, 54mA, 275mW	SOT-323	16df	-	3a	Cen
W6	-	AP8822C-36GA	Vdet-IC	3.6V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
W6	-	AP8822C-36GT	Vdet-IC	3.6V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
W6	-	AP8822C-36PA	Vdet-IC	3.6V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
W6	-	AP8822C-36PT	Vdet-IC	3.6V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
W6	-	BZX84B3V9	Z-diode	3.82..3.98V, Zzt=90Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
W6	-	BZX84C3V3	Z-diode	3.1..3.5V, Zzt=95Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
W6	-	BZX84C3V9	Z-diode	3.7..4.1V, Zzt=90Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
W6	-	BZX84C3V9W	Z-diode	3.7..4.1V, Zzt=90Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
W6	-	BZX88-C3V3	Z-diode	3.3V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
W6	-	DCG010	Si-diode	Dual, Hi-Speed-Sw, 65V, 100mA, Vf=1.2V(0.1A), 3pF, 4ns	MCP	16dg	-	3a	San
W6	-	ELM7636LBB	Vdet-IC	3.6V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
W6	-	ELM9736CBB	Vdet-IC	3.6V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
W6	-	NTE505SM	Z-diode	3.3V±5%, If=250mA, 300mW	SOT-23	16dc	-	3a	Nte
W6	-	TZTC3V9WS	Z-diode	3.71..4.10V, Izt=5mA, Zzt=90Ω, 200mW	SOT-323	16dc	-	3a	Ttr
W6-	-	PBHV8115T	Si-npn	HV, 150V, 1A, 30mW, B>100, 30MHz	SOT-23	16ta	-	3a	Phi
W60	-	BZX84-A6V2	Z-diode	6.2V±1%, Zzt=10Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W61	-	BZX84-A6V8	Z-diode	6.8V±1%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W62	-	BZX84-A7V5	Z-diode	7.5V±1%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W63	-	BZX84-A8V2	Z-diode	8.2V±1%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W64	-	BZX84-A9V1	Z-diode	9.1V±1%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W65	-	BZX84-A10	Z-diode	10V±1%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W66	-	BZX84-B10	Z-diode	10V±2.5%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W67	-	BZX84-A12	Z-diode	12V±1%, Zzt=25Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W69	-	BZX84-A15	Z-diode	15V±1%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W6D	-	2PD601AQW	Si-npn	GP, Sw, 60V, 100mA, 200mW, B=160..260, >100MHz	SOT-323	16ta	-	3a	PhC
W6E	-	2PD601ARW	Si-npn	GP, Sw, 60V, 100mA, 200mW, B=210..340, >120MHz	SOT-323	16ta	-	3a	PhC
W6F	-	2PD601ASW	Si-npn	GP, Sw, 60V, 100mA, 200mW, B=290..460, >140MHz	SOT-323	16ta	-	3a	PhC
W6p	-	PBHV8115T	Si-npn	HV, 150V, 1A, 30mW, B>100, 30MHz	SOT-23	16ta	-	3a	PhH
W6t	-	PBHV8115T	Si-npn	HV, 150V, 1A, 30mW, B>100, 30MHz	SOT-23	16ta	-	3a	PhM
W6W	-	CMSZDA3V3	Z-diode	Dual, 3.1..3.5V, Zzt=95Ω, 47mA, 275mW	SOT-323	16df	-	3a	Cen
W6W	-	PBHV8115T	Si-npn	HV, 150V, 1A, 30mW, B>100, 30MHz	SOT-23	16ta	-	3a	PhC
W7	-	AP8822C-37GA	Vdet-IC	3.7V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
W7	-	AP8822C-37GT	Vdet-IC	3.7V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
W7	-	AP8822C-37PA	Vdet-IC	3.7V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
W7	-	AP8822C-37PT	Vdet-IC	3.7V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
W7	-	BZX84B4V3	Z-diode	4.21..4.39V, Zzt=90Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
W7	-	BZX84C3V6	Z-diode	3.4..3.8V, Zzt=90Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
W7	-	BZX84C3V9	Z-diode	3.7..4.1V, Zzt=90Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
W7	-	BZX84C4V3	Z-diode	4.0..4.6V, Zzt=90Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
W7	-	BZX84C4V3W	Z-diode	4.0..4.6V, Zzt=90Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
W7	-	BZX88-C3V6	Z-diode	3.6V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
W7	-	DCC010	Si-diode	Dual, Hi-Speed-Sw, 65V, 100mA, Vf=1.2V(0.1A), 3pF, 4ns	MCP	16dl	-	3a	San
W7	-	ELM7637LBB	Vdet-IC	3.7V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
W7	-	ELM9737CBB	Vdet-IC	3.7V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
W7	-	NTE506SM	Z-diode	3.6V±5%, If=250mA, 300mW	SOT-23	16dc	-	3a	Nte
W7	-	TZTC4V3WS	Z-diode	4.09..4.52V, Izt=5mA, Zzt=90Ω, 200mW	SOT-323	16dc	-	3a	Ttr
W70	-	BZX84-B16	Z-diode	16V±2.5%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W71	-	BZX84-B18	Z-diode	18V±2.5%, Zzt=45Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W72	-	BZX84-B20	Z-diode	20V±2.5%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W73	-	BZX84-B22	Z-diode	22V±2.5%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W74	-	BZX84-B24	Z-diode	24V±2.5%, Zzt=70Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W75	-	BZX84-A27	Z-diode	27V±1%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
W77	-	PDTA124XU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	SOT-323	16ta	-	3a	NxC
W7A	-	PDTA144TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=47k	SOT-323	16ta	-	3a	NxC
W7B	-	PDTA124TU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=22k	SOT-323	16ta	-	3a	NxC
W7C	-	PDTA115EU	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	SOT-323	16ta	-	3a	NxC
W7G	-	PBRN113ET	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxC
W7H	-	PBRP123ET	Si-pnp-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxC



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
W7J	-	PBRN123ET	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxC
W7K	-	PBRP113ET	Si-pnp-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxC
W7L	-	PBRN113ZT	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxC
W7M	-	PBRP113ZT	Si-pnp-Digi	Sw, 40V, 600mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxC
W7P	-	PBRN123YT	Si-npn-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxC
W7Q	-	PBRP123YT	Si-pnp-Digi	Sw, 40V, 600mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxC
W7R	-	PDTD113ET	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxC
W7S	-	PDTB123ET	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxC
W7T	-	PDTD123ET	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/2.2k	SOT-23	16ta	-	3a	NxC
W7U	-	PDTB113ET	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/1k	SOT-23	16ta	-	3a	NxC
W7V	-	PDTD113ZT	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxC
W7W	-	CMSZDA3V6	Z-diode	Dual, 3.4..3.8V, Zzt=95Ω, 45mA, 275mW	SOT-323	16df	-	3a	Cen
W7W	-	PDTB113ZT	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxC
W7X	-	PDTD123YT	Si-npn-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxC
W7Y	-	PDTB123YT	Si-pnp-Digi	Sw, 50V, 500mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxC
W8	-	AP8822C-38GA	Vdet-IC	3.8V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
W8	-	AP8822C-38GT	Vdet-IC	3.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
W8	-	AP8822C-38PA	Vdet-IC	3.8V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
W8	-	AP8822C-38PT	Vdet-IC	3.8V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
W8	-	BZX84B4V7	Z-diode	4.61..4.79V, Zzt=80Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
W8	-	BZX84C4V7	Z-diode	4.4..5.0V, Zzt=80Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
W8	-	BZX84C4V7W	Z-diode	4.4..5.0V, Zzt=80Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
W8	-	BZX88-C3V9	Z-diode	3.9V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
W8	-	ELM7638LBB	Vdet-IC	3.8V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
W8	-	ELM9738CBB	Vdet-IC	3.8V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
W8	-	NTE507SM	Z-diode	3.9V±5%, If=250mA, 300mW	SOT-23	16dc	-	3a	Nte
W8	-	TZTC4V7WS	Z-diode	4.47..4.94V, Izt=5mA, Zzt=80Ω, 200mW	SOT-323	16dc	-	3a	Ttr
W86	-	BZX84-A75	Z-diode	75V±1%, Zzt=250Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxC
W8W	-	CMSZDA3V9	Z-diode	Dual, 3.7..4.1V, Zzt=90Ω, 43mA, 275mW	SOT-323	16df	-	3a	Cen
W9	-	AP8822C-39GA	Vdet-IC	3.9V±2%, -Reset PPO, 200ms, Halogen-fre	SOT-23	16vdc	VD7	3bb	Anw
W9	-	AP8822C-39GT	Vdet-IC	3.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-70	16vdc	VD7	3bb	Anw
W9	-	AP8822C-39PA	Vdet-IC	3.9V±2%, -Reset PPO, 200ms	SOT-23	16vdc	VD7	3b	Anw
W9	-	AP8822C-39PT	Vdet-IC	3.9V±2%, -Reset PPO, 200ms	SC-70	16vdc	VD7	3b	Anw
W9	-	BZX84B5V1	Z-diode	5.0..5.20V, Zzt=60Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
W9	-	BZX84C4V3	Z-diode	4.0..4.6V, Zzt=90Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
W9	-	BZX84C4V3LT1	Z-diode	4.0..4.6V, Zzt=90Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
W9	-	BZX84C5V1	Z-diode	4.8..5.4V, Zzt=60Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
W9	-	BZX84C5V1W	Z-diode	4.8..5.4V, Zzt=60Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
W9	-	BZX88-C4V3	Z-diode	4.3V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
W9	-	DPA05	PIN-diode	Dual, FM/AM-tun, AGC, 50V, 50mA, Vf=0.95V(50mA), 0.25pF	CP	16dl	-	3a	San
W9	-	ELM7639LBB	Vdet-IC	3.9V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
W9	-	ELM9739CBB	Vdet-IC	3.9V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
W9	-	LBZX84C4V3L	Z-diode	4..4.6V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
W9	-	NTE508SM	Z-diode	4.3V±5%, If=250mA, 300mW	SOT-23	16dc	-	3a	Nte
W9	-	TZTC5V1WS	Z-diode	4.85..5.36V, Izt=5mA, Zzt=60Ω, 200mW	SOT-323	16dc	-	3a	Ttr
W9	cn	BZX84C4V3LT1G	Z-diode	4.0..4.6V, Zzt=90Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
W9-	-	BAP63-05W	PIN-diode	Dual, RF, 50V, 100mA, 240mW, 0.35pF, 1.8Ω(10mA/100MHz)	SOT-323	16dg	-	3a	Phi
W9W	-	CMSZDA4V3	Z-diode	Dual, 4.0..4.6V, Zzt=90Ω, 40mA, 275mW	SOT-323	16df	-	3a	Cen
WA	-	2N7002	n-MOSFET	TMOS, 60V, 300mA, 300mW, 1.2Ω(500mA), 8.8/14.8ns	SOT-23	16fh	-	3f	Kec
WA	-	2SD1383K-A	Si-npn-Darl	AF, 40V, 300mA, 300mW, B>1000, >250MHz	SOT-346	16ta	-	3a	Rhm
WA	-	BAS16WPT	Si-diode	Sw, 100V, 150mA, Vf<1.25V(150mA), 4ns	SOT-323	16dc	-	3a	Chm
WA	-	BZX84B5V6	Z-diode	5.49..5.71V, Zzt=40Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WA	-	BZX84C5V6	Z-diode	5.2..6.0V, Zzt=40Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WA	-	BZX84C5V6W	Z-diode	5.2..6.0V, Zzt=40Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WA	-	TZTC5V6WS	Z-diode	5.32..5.88V, Izt=5mA, Zzt=40Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WA1	-	BZX84-C75	Z-diode	75V±5%, Zzt=250Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxC
WAA	-	PDTC144VT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/10k	SOT-23	16ta	-	3a	NxC
WAB	-	PDTA115ET	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k	SOT-23	16ta	-	3a	NxC
WAC	-	PDTA115TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=100k	SOT-23	16ta	-	3a	NxC
WAD	-	PDTA123YT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxC
WAE	-	PDTA124TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=22k	SOT-23	16ta	-	3a	NxC
WAF	-	PDTA144TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=47k	SOT-23	16ta	-	3a	NxC
WAG	-	PDTA144VT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/10k	SOT-23	16ta	-	3a	NxC
WAK	-	PDTC115TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=100k	SOT-23	16ta	-	3a	NxC
WAL	-	PDTC123YT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	NxC
WAM	-	PDTA113ZT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=1k/10k	SOT-23	16ta	-	3a	NxC
WAO	-	KTC3920-O	Si-npn	GP, Sw, 35V, 500mA, 200mW, B=70..140, 300MHz	SOT-23	16ta	-	3f	Kec
WAs	-	BCR103	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k, 140MHz	SOT-23	16ta	-	3c	Inf
WAs	-	BCR103F	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k, 140MHz	TSFP-3	18ta	-	3a	Inf
WAs	-	BCR103T	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k, 140MHz	SOT-416	16ta	-	3a	Inf

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
WAY	-	KTC3920-Y	Si-npn	GP, Sw, 35V, 500mA, 200mW, B=120..240, 300MHz	SOT-23	16ta	-	3f	Kec
WB	-	2N7002A	n-MOSFET	TMOS, 60V, 115mA, 200mW, 1.8Ω(500mA), 20/20ns	SOT-23	16fh	-	3f	Kec
WB	-	2SD1383K-B	Si-npn-Darl	AF, 40V, 300mA, 200mW, B>5000, >250MHz	SOT-346	16ta	-	3a	Rhm
WB	-	BAS21WPT	Si-diode	Sw, 250V, 200mA, Vf<1.25V(100mA), 50ns	SOT-323	16dc	-	3a	Chm
WB	-	BZX84B6V2	Z-diode	6.08..6.32V, Zzt=10Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WB	-	BZX84C6V2	Z-diode	5.8..6.6V, Zzt=10Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WB	-	BZX84C6V2W	Z-diode	5.8..6.6V, Zzt=10Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WB	-	TZTC6V2WS	Z-diode	5.89..6.51V, Izt=5mA, Zzt=10Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WB0	-	BZX84-C68	Z-diode	68V±5%, Zzt=200Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxC
WB1	-	BZX84-C3V3	Z-diode	3.3V±5%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WB2	-	BZX84-C3V6	Z-diode	3.6V±5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WB3	-	BZX84-C3V9	Z-diode	3.9V±5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WB4	-	BZX84-C43	Z-diode	43V±5%, Zzt=150Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WB5	-	BZX84-C47	Z-diode	47V±5%, Zzt=170Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WB6	-	BZX84-C4V3	Z-diode	4.3V±5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WB7	-	BZX84-C51	Z-diode	51V±5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WB8	-	BZX84-C56	Z-diode	56V±5%, Zzt=135Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxC
WB9	-	BZX84-C62	Z-diode	62V±5%, Zzt=150Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxC
WBs	-	BCR153	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k, 200MHz	SOT-23	16ta	-	3c	Inf
WBs	-	BCR153F	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k, 200MHz	TSFP-3	18ta	-	3a	Inf
WBs	-	BCR153T	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k, 200MHz	SOT-416	16ta	-	3a	Inf
WC	-	2N7002K	n-MOSFET	TMOS, 60V, 300mA, 300mW, 1.2Ω(500mA), 11.1/22.5ns	SOT-23	16fh	-	3f	Kec
WC	-	BZX84B6V8	Z-diode	6.66..6.94V, Zzt=15Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WC	-	BZX84C6V8	Z-diode	6.4..7.2V, Zzt=15Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WC	-	BZX84C6V8W	Z-diode	6.4..7.2V, Zzt=15Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WC	-	CHDTC114EKPT	Si-npn-Digi	Sw, 50V, 50mA, 250MHz, R1/R2=10k/10k	SOT-23	16ta	-	3a	Chm
WC	-	CHT857BTPT-S	Si-pnp	AF, Sw, 45V, 100mA, B=420..800, 100MHz	SOT-416	16ta	-	3a	Chm
WC	-	TZTC6V8WS	Z-diode	6.46..7.14V, Izt=5mA, Zzt=15Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WC0	-	BZX84-A13	Z-diode	13V±1%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WC1	-	BZX84-A3V6	Z-diode	3.6V±1%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WC2	-	BZX84-A20	Z-diode	20V±1%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WC3	-	BZX84-A36	Z-diode	36V±1%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WC4	-	BZX84-A39	Z-diode	39V±1%, Zzt=130Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WC5	-	BZX84-A43	Z-diode	43V±1%, Zzt=150Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WC6	-	BZX84-A51	Z-diode	51V±1%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WCs	-	BCR133	Si-npn-Digi	Sw, 50V, 100mA, 330mW, R1/R2=10k/10k, 130MHz	SOT-23	16ta	-	3c	Inf
WCs	-	BCR133F	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k, 130MHz	TSFP-3	18ta	-	3a	Inf
WCs	-	BCR133T	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k, 130MHz	SOT-416	16ta	-	3a	Inf
WCs	-	BCR133W	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k, 130MHz	SOT-323	16ta	-	3c	Inf
WD	-	BZX84B7V5	Z-diode	7.35..7.65V, Zzt=15Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WD	-	BZX84C7V5	Z-diode	7.0..7.9V, Zzt=15Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WD	-	BZX84C7V5W	Z-diode	7.0..7.9V, Zzt=15Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WD	-	MMBD4448WPT	Si-diode	Sw, 80V, 250mA, Vf<1V(100mA), 4ns	SOT-323	16dc	-	3a	Chm
WD	-	TZTC7V5WS	Z-diode	7.13..7.88V, Izt=5mA, Zzt=15Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WDs	-	BCR141	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k, 130MHz	SOT-23	16ta	-	3c	Inf
WDs	-	BCR141F	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k, 130MHz	TSFP-3	18ta	-	3a	Inf
WDs	-	BCR141T	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k, 130MHz	SOT-416	16ta	-	3a	Inf
WDs	-	BCR141W	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k, 130MHz	SOT-323	16ta	-	3c	Inf
WE	-	2SK322-E	n-FET	HF, 15V, 50mA, 150mW, Idss=6..12mA, Up<3V	SOT-23	16fa	-	3a	Ren
WE	-	BZX84B8V2	Z-diode	8.04..8.36V, Zzt=15Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WE	-	BZX84C8V2	Z-diode	7.7..8.7V, Zzt=15Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WE	-	BZX84C8V2W	Z-diode	7.7..8.7V, Zzt=15Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WE	-	CHDTC144EEPT	Si-npn-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/47k	SOT-416	16ta	-	3a	Chm
WE	-	CHDTC144EUPT	Si-npn-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/47k	SOT-323	16ta	-	3a	Chm
WE	-	TZTC8V2WS	Z-diode	7.79..8.61V, Izt=5mA, Zzt=15Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WE1	-	BFS17W	Si-npn	VHF/UHF, Mix/Osc, 25V, 25mA, 250mW, B=90, 1.6GHz	SOT-23	16ta	-	3a	Sil
WE1	-	CHDTA114WEPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=10k/4.7k	SOT-416	16ta	-	3a	Chm
WE2	-	BFS17AW	Si-npn	VHF/UHF, Mix/Osc, 25V, 25mA, 200mW, B=20..150, 2.8GHz	SOT-323	16ta	-	3a	Sil
WE2	-	CHDTA144WEPT	Si-pnp-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/22k	SOT-416	16ta	-	3a	Chm
WEA	-	CHDTC114WEPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=10k/4.7k	SOT-416	16ta	-	3a	Chm
WEB	-	CHDTC144WEPT	Si-npn-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/22k	SOT-416	16ta	-	3a	Chm
WEs	-	BCR148	Si-npn-Digi	Sw, 50V, 70mA, 200mW, R1/R2=47k/47k, 100MHz	SOT-23	16ta	-	3c	Inf
WEs	-	BCR148F	Si-npn-Digi	Sw, 50V, 70mA, 250mW, R1/R2=47k/47k, 100MHz	TSFP-3	18ta	-	3a	Inf
WEs	-	BCR148T	Si-npn-Digi	Sw, 50V, 70mA, 250mW, R1/R2=47k/47k, 100MHz	SOT-416	16ta	-	3a	Inf
WEs	-	BCR148W	Si-npn-Digi	Sw, 50V, 70mA, 250mW, R1/R2=47k/47k, 100MHz	SOT-323	16ta	-	3c	Inf
WF	-	2SK322-F	n-FET	HF, 15V, 50mA, 150mW, Idss=10..20mA, Up<3V	SOT-23	16fa	-	3a	Ren
WF	-	BZX84B9V1	Z-diode	8.92..9.28V, Zzt=15Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WF	-	BZX84C9V1	Z-diode	8.5..9.6V, Zzt=15Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WF	-	BZX84C9V1W	Z-diode	8.5..9.6V, Zzt=15Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WF	-	CHDTC143EEPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/4.7k	SOT-416	16ta	-	3a	Chm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
WF	-	TZTC9V1WS	Z-diode	8.65..9.56V, Izt=5mA, Zzt=15Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WFs	-	BCR112	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k, 140MHz	SOT-23	16ta	-	3c	Inf
WFs	-	BCR112F	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k, 140MHz	TSFP-3	18ta	-	3a	Inf
WFs	-	BCR112T	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k, 140MHz	SOT-416	16ta	-	3a	Inf
WFs	-	BCR112W	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k, 140MHz	SOT-323	16ta	-	3c	Inf
WG	-	2SK322-G	n-FET	HF, 15V, 50mA, 150mW, Idss=16..32mA, Up<3V	SOT-23	16fa	-	3a	Ren
WG	-	BZX84B10	Z-diode	9.80..10.20V, Zzt=20Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WG	-	BZX84C10	Z-diode	9.4..10.6V, Zzt=20Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WG	-	BZX84C10W	Z-diode	9.4..10.6V, Zzt=20Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WG	-	CHDTC143ZEPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/47k	SOT-416	16ta	-	3a	Chm
WG	-	CHDTC143ZKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/47k	SOT-23	16ta	-	3a	Chm
WG	-	CHDTC143ZUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/47k	SOT-323	16ta	-	3a	Chm
WG	-	KTC3876S-GR	Si-npn	GP, 35V, 500mA, 150mW, B=200..400, 200MHz	SOT-23	16ta	-	3f	Kec
WG	-	TZTC10WS	Z-diode	9.50..10.50V, Izt=5mA, Zzt=20Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WG1	-	PMBT5551	Si-npn	GP, 180V, 300mA, 250mW, B=80..250, 100..300MHz	SOT-23	16ta	-	3a	PhC
WG3	-	PMST5551	Si-npn	HV, 180V, 300mA, 200mW, B=80..250, 100..300MHz	SOT-323	16ta	-	3a	PhC
WGs	-	BCR116	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k, 160MHz	SOT-23	16ta	-	3c	Inf
WGs	-	BCR116F	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k, 150MHz	TSFP-3	18ta	-	3a	Inf
WGs	-	BCR116T	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k, 150MHz	SOT-416	16ta	-	3a	Inf
WGs	-	BCR116W	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k, 160MHz	SOT-323	16ta	-	3c	Inf
WH	-	2SK322-H	n-FET	HF, 15V, 50mA, 150mW, Idss=25..50mA, Up<3V	SOT-23	16fa	-	3a	Ren
WH	-	BZX84B11	Z-diode	10.78..11.22V, Zzt=20Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WH	-	BZX84C11	Z-diode	10.4..11.6V, Zzt=20Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WH	-	BZX84C11W	Z-diode	10.4..11.6V, Zzt=20Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WH	-	TZTC11WS	Z-diode	10.45..11.55V, Izt=5mA, Zzt=20Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WHs	-	BCR108	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k, 170MHz	SOT-23	16ta	-	3c	Inf
WHs	-	BCR108F	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k, 170MHz	TSFP-3	18ta	-	3a	Inf
WHs	-	BCR108T	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k, 170MHz	SOT-416	16ta	-	3a	Inf
WHs	-	BCR108W	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k, 170MHz	SOT-323	16ta	-	3c	Inf
WI	-	BZX84B12	Z-diode	11.76..12.24V, Zzt=25Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WI	-	BZX84C12	Z-diode	11.4..12.7V, Zzt=25Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WI	-	BZX84C12W	Z-diode	11.4..12.7V, Zzt=25Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WI	-	TZTC12WS	Z-diode	11.40..12.60V, Izt=5mA, Zzt=25Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WIs	-	BCR158	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k, 200MHz	SOT-23	16ta	-	3c	Inf
WIs	-	BCR158F	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k, 170MHz	TSFP-3	18ta	-	3a	Inf
WIs	-	BCR158T	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k, 170MHz	SOT-416	16ta	-	3a	Inf
WIs	-	BCR158W	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k, 200MHz	SOT-323	16ta	-	3c	Inf
WJ	-	BZX84B14	Z-diode	13.72..14.28V, Zzt=30Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WJ	-	CHDTC114YEPT	Si-npn-Digi	Sw, 50V, 70mA, 250MHz, R1/R2=10/47k	SOT-416	16ta	-	3a	Chm
WJ	-	CHDTC114YKPT	Si-npn-Digi	Sw, 50V, 70mA, 250MHz, R1/R2=10/47k	SOT-23	16ta	-	3a	Chm
WJ	-	CHDTC114YUPT	Si-npn-Digi	Sw, 50V, 70mA, 250MHz, R1/R2=10/47k	SOT-323	16ta	-	3a	Chm
WJ	-	TZTC14WS	Z-diode	13.30..14.70V, Izt=5mA, Zzt=30Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WJs	-	BCR135	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/47k, 150MHz	SOT-23	16ta	-	3c	Inf
WJs	-	BCR135F	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k, 150MHz	TSFP-3	18ta	-	3a	Inf
WJs	-	BCR135T	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k, 150MHz	SOT-416	16ta	-	3a	Inf
WJs	-	BCR135W	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k, 150MHz	SOT-323	16ta	-	3c	Inf
WK	-	BZX84B13	Z-diode	12.74..13.26V, Zzt=30Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WK	-	BZX84C13	Z-diode	12.4..14.1V, Zzt=30Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WK	-	BZX84C13W	Z-diode	12.4..14.1V, Zzt=30Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WK	-	TZTC13WS	Z-diode	12.35..13.65V, Izt=5mA, Zzt=30Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WK1	-	CHDTA114WKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=10k/4.7k	SOT-23	16ta	-	3a	Chm
WK2	-	CHDTA144WKPT	Si-pnp-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/22k	SOT-23	16ta	-	3a	Chm
WKA	-	CHDTC114WKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=10k/4.7k	SOT-23	16ta	-	3a	Chm
WKB	-	CHDTC144WKPT	Si-npn-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/22k	SOT-23	16ta	-	3a	Chm
WKs	-	BCR119	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=4.7k, 150MHz	SOT-23	16ta	-	3c	Inf
WKs	-	BCR119F	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k, 150MHz	TSFP-3	18ta	-	3a	Inf
WKs	-	BCR119T	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k, 150MHz	SOT-416	16ta	-	3a	Inf
WKs	-	BCR119W	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=4.7k, 150MHz	SOT-323	16ta	-	3c	Inf
WL	-	2SA1589	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1=22k	SOT-23	16ta	-	3a	San
WL	-	BZX84B15	Z-diode	14.70..15.30V, Zzt=30Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WL	-	BZX84C15	Z-diode	13.8..15.6V, Zzt=30Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WL	-	BZX84C15W	Z-diode	13.8..15.6V, Zzt=30Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WL	-	TZTC15WS	Z-diode	14.25..15.75V, Izt=5mA, Zzt=30Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WLs	-	BCR146	Si-npn-Digi	Sw, 50V, 70mA, 200mW, R1/R2=47k/22k, 150MHz	SOT-23	16ta	-	3c	Inf
WLs	-	BCR146F	Si-npn-Digi	Sw, 50V, 70mA, 250mW, R1/R2=47k/22k, 150MHz	TSFP-3	18ta	-	3a	Inf
WLs	-	BCR146T	Si-npn-Digi	Sw, 50V, 70mA, 250mW, R1/R2=47k/22k, 150MHz	SOT-416	16ta	-	3a	Inf
WLs	-	BCR146W	Si-npn-Digi	Sw, 50V, 70mA, 250mW, R1/R2=47k/22k, 150MHz	SOT-323	16ta	-	3c	Inf
WM	-	BZX84B16	Z-diode	15.68..16.32V, Zzt=40Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WM	-	BZX84C16	Z-diode	15.3..17.1V, Zzt=40Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WM	-	BZX84C16W	Z-diode	15.3..17.1V, Zzt=40Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
WM	-	TZTC16WS	Z-diode	15.20..16.80V, Izt=5mA, Zzt=40Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WMs	-	BCR183	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k, 200MHz	SOT-23	16ta	-	3c	Inf
WMs	-	BCR183F	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k, 130MHz	TSFP-3	18ta	-	3a	Inf
WMs	-	BCR183T	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k, 130MHz	SOT-416	16ta	-	3a	Inf
WMs	-	BCR183W	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/10k, 200MHz	SOT-323	16ta	-	3c	Inf
WN	-	2SC6061	Si-npn	Sw, 180V, 1A, 1W, 0.1/0.2µs, B=120..300	SOT-23	16ta	-	3a	Tos
WN	-	BZX84B18	Z-diode	17.64..18.36V, Zzt=45Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WN	-	BZX84C18	Z-diode	16.8..19.1V, Zzt=45Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WN	-	BZX84C18W	Z-diode	16.8..19.1V, Zzt=45Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WN	-	CHDTA114YUPT	Si-pnp-Digi	Sw, 50V, 70mA, 250MHz, R1/R2=10/47k	SOT-323	16ta	-	3a	Chm
WN	-	TZTC18WS	Z-diode	17.10..18.90V, Izt=5mA, Zzt=45Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WNs	-	BCR185	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=10k/47k, 200MHz	SOT-23	16ta	-	3c	Inf
WNs	-	BCR185F	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k, 150MHz	TSFP-3	18ta	-	3a	Inf
WNs	-	BCR185T	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k, 150MHz	SOT-416	16ta	-	3a	Inf
WNs	-	BCR185W	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k, 200MHz	SOT-323	16ta	-	3c	Inf
WO	-	2SC2859-O	Si-npn	AF, 35V, 500mA, 150mW, B=70..140, 200MHz	SC-59	16ta	-	3a	Tos
WO	-	2SC4118-O	Si-npn	AF-Drv, Sw, 35V, 500mA, 100mW, B=70..140, 200MHz	SOT-323	16ta	-	3a	Tos
WO	-	BZX84B20	Z-diode	19.60..20.40V, Zzt=55Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WO	-	BZX84C20	Z-diode	18.8..21.2V, Zzt=55Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WO	-	BZX84C20W	Z-diode	18.8..21.2V, Zzt=55Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WO	-	KTC3876S-O	Si-npn	GP, 35V, 500mA, 150mW, B=70..140, 200MHz	SOT-23	16ta	-	3f	Kec
WO	-	TZTC20WS	Z-diode	19.0..21.0V, Izt=5mA, Zzt=55Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WO4	-	PMBS3904	Si-npn	Sw, 40V, 100mA, 250mW, B=100..300, >180MHz	SOT-23	16ta	-	3a	PhC
WO6	-	PMBS3906	Si-pnp	Sw, 40V, 100mA, 250mW, B=100..300, >150MHz	SOT-23	16ta	-	3a	PhC
WOs	-	BCR191	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k, 200MHz	SOT-23	16ta	-	3c	Inf
WOs	-	BCR191F	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k, 130MHz	TSFP-3	18ta	-	3a	Inf
WOs	-	BCR191T	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k, 130MHz	SOT-416	16ta	-	3a	Inf
WOs	-	BCR191W	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/22k, 200MHz	SOT-323	16ta	-	3c	Inf
WP	-	2SK322-P	n-FET	HF, 15V, 50mA, 150mW, Idss=5..15mA, Up<3V	SOT-23	16fa	-	3a	Ren
WP	-	BZX84B22	Z-diode	21.56..22.44V, Zzt=55Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WP	-	BZX84C22	Z-diode	20.8..23.3V, Zzt=55Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WP	-	BZX84C22W	Z-diode	20.8..23.3V, Zzt=55Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WP	-	TZTC22WS	Z-diode	20.90..23.10V, Izt=5mA, Zzt=55Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WPs	-	BCR192	Si-pnp-Digi	Sw, 50V, 100mA, 330mW, R1/R2=22k/47k, 200MHz	SOT-23	16ta	-	3c	Inf
WPs	-	BCR192F	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k, 150MHz	TSFP-3	18ta	-	3a	Inf
WPs	-	BCR192T	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k, 150MHz	SOT-416	16ta	-	3a	Inf
WPs	-	BCR192W	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k, 200MHz	SOT-323	16ta	-	3c	Inf
WQ	-	2PD602Q	Si-npn	GP, Sw, 60V, 500mA, 250mW, B=85..170, >140MHz	SOT-23	16ta	-	3a	Phi
WQ	-	2SD1820-Q	Si-npn	GP, 30V, 500mA, 150mW, B=85..170, 20MHz	SOT-323	16ta	-	3a	Pan
WQ	-	2SD602-Q	Si-npn	GP, AF, 50V, 500mA, 200mW, B=85..170, 200MHz	SC-59	16ta	-	3a	Pan
WQ	-	2SK322-Q	n-FET	HF, 15V, 50mA, 150mW, Idss=14..24mA, Up<3V	SOT-23	16fa	-	3a	Ren
WR	-	2PD602R	Si-npn	GP, Sw, 60V, 500mA, 250mW, B=120..240, >160MHz	SOT-23	16ta	-	3a	Phi
WR	-	2SD1820-R	Si-npn	GP, 30V, 500mA, 150mW, B=120..240, 20MHz	SOT-323	16ta	-	3a	Pan
WR	-	2SD602-R	Si-npn	GP, AF, 50V, 500mA, 200mW, B=120..240, 200MHz	SC-59	16ta	-	3a	Pan
WR	-	2SK322-R	n-FET	HF, 15V, 50mA, 150mW, Idss=20..32mA, Up<3V	SOT-23	16fa	-	3a	Ren
WR	-	BZX84B24	Z-diode	23.52..24.48V, Zzt=70Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WR	-	BZX84C24	Z-diode	22.8..25.6V, Zzt=70Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WR	-	BZX84C24W	Z-diode	22.8..25.6V, Zzt=70Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WR	-	CHDTA144EEPT	Si-pnp-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/47k	SOT-416	16ta	-	3a	Chm
WR	-	MSD602-R	Si-npn	GP, 60V, 500mA, 200mW, B=120..240	SOT-323	16ta	-	3a	Mot
WR	-	TZTC24WS	Z-diode	22.80..25.20V, Izt=5mA, Zzt=70Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WR0	-	BZX84-B56	Z-diode	56V±2.5%, Zzt=135Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxC
WR1	-	BZX84-B5V1	Z-diode	5.1V±2.5%, Zzt=60Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WR2	-	BFR93AW	Si-npn	UHF-A-Band, 15V, 30mA, 300mW, B>40, >5GHz	SOT-323	16ta	-	3a	Sil
WR2	-	BZX84-B5V6	Z-diode	5.6V±2.5%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WR3	-	BZX84-B62	Z-diode	62V±2.5%, Zzt=150Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxC
WR4	-	BZX84-B68	Z-diode	68V±2.5%, Zzt=200Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxC
WR5	-	BZX84-B6V2	Z-diode	6.2V±2.5%, Zzt=10Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WR6	-	BZX84-B6V8	Z-diode	6.8V±2.5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WR7	-	BZX84-B75	Z-diode	75V±2.5%, Zzt=250Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	NxC
WR8	-	BZX84-B7V5	Z-diode	7.5V±2.5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WR9	-	BZX84-B8V2	Z-diode	8.2V±2.5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WRC	-	BFR193TRW	Si-npn	UHF, 20V, 80mA, 400mW, 8GHz	SOT-323	16te	-	3a	Sil
WRF	-	BFR181TW	Si-npn	RF, 15V, 20mA, 175mW, 8GHz, B=50..140	SOT-323	16ta	-	3a	Vs
WRG	-	BFR182TW	Si-npn	RF, 15V, 35mA, 200mW, 7.5GHz, B=70..140	SOT-323	16ta	-	3a	Vs
WRH	-	BFR183TW	Si-npn	RF, 15V, 65mA, 200mW, 7.5GHz, B=50..150	SOT-323	16ta	-	3a	Vs
WRs	-	BCR198	Si-pnp-Digi	Sw, 50V, 70mA, 200mW, R1/R2=47k/47k, 190MHz	SOT-23	16ta	-	3c	Inf
WRs	-	BCR198F	Si-pnp-Digi	Sw, 50V, 70mA, 250mW, R1/R2=47k/47k, 100MHz	TSFP-3	18ta	-	3a	Inf
WRs	-	BCR198T	Si-pnp-Digi	Sw, 50V, 70mA, 250mW, R1/R2=47k/47k, 100MHz	SOT-416	16ta	-	3a	Inf
WRs	-	BCR198W	Si-pnp-Digi	Sw, 50V, 70mA, 250mW, R1/R2=47k/47k, 190MHz	SOT-323	16ta	-	3c	Inf

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
WS	-	2PD602S	Si-npn	GP, Sw, 60V, 500mA, 250mW, B=85..170, >140MHz	SOT-23	16ta	-	3a	Phi
WS	-	2SD1820-S	Si-npn	GP, 30V, 500mA, 150mW, B=170..340, 20MHz	SOT-323	16ta	-	3a	Pan
WS	-	2SD602-S	Si-npn	GP, AF, 50V, 500mA, 200mW, B=170..340, 200MHz	SC-59	16ta	-	3a	Pan
WS	-	2SK322-S	n-FET	HF, 15V, 50mA, 150mW, Idss=18..42mA, Up<3V	SOT-23	16fa	-	3a	Ren
WS	-	BZX84B27	Z-diode	26.46..27.54V, Zzt=80Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WS	-	BZX84C27	Z-diode	25.1..28.9V, Zzt=80Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WS	-	BZX84C27W	Z-diode	25.1..28.9V, Zzt=80Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WS	-	TZTC27WS	Z-diode	25.65..28.35V, Izt=5mA, Zzt=80Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WS0	-	BZX84-B39	Z-diode	39V±2.5%, Zzt=130Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WS1	-	BZX84-B3V0	Z-diode	3.0V±2.5%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WS2	-	BZX84-B3V3	Z-diode	3.3V±2.5%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WS3	-	BZX84-B3V6	Z-diode	3.6V±2.5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WS4	-	BZX84-B3V9	Z-diode	3.9V±2.5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WS5	-	BZX84-B43	Z-diode	43V±2.5%, Zzt=150Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WS6	-	BZX84-B47	Z-diode	47V±2.5%, Zzt=170Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WS7	-	BZX84-B4V3	Z-diode	4.3V±2.5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WS8	-	BZX84-B4V7	Z-diode	4.7V±2.5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WS9	-	BZX84-B51	Z-diode	51V±2.5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WSs	-	BCR169	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=4.7k, 200MHz	SOT-23	16ta	-	3c	Inf
WSs	-	BCR169F	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k, 150MHz	TSFP-3	18ta	-	3a	Inf
WSs	-	BCR169T	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k, 150MHz	SOT-416	16ta	-	3a	Inf
WSs	-	BCR169W	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=4.7k, 200MHz	SOT-323	16ta	-	3c	Inf
WT	-	2SA1020PT-Y	Si-pnp	AF, Sw, 50V, 500mA, B=120..240, 120MHz	SOT-23	16ta	-	3a	Chm
WT	-	2SC4694	Si-npn	AF, Mute, 50V, 500mA, 150mW, B=300..1200, 250MHz	MCP	16ta	-	3a	San
WT	-	2SC4695	Si-npn	AF, Mute, 50V, 500mA, 250mW, B=300..1200, 250MHz	CP	16ta	-	3a	San
WT	-	2SK322-T	n-FET	HF, 15V, 50mA, 150mW, Idss=36..50mA, Up<3V	SOT-23	16fa	-	3a	Ren
WT	-	BZX84B30	Z-diode	29.40..30.60V, Zzt=80Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WT	-	BZX84C30	Z-diode	28..32V, Zzt=80Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WT	-	BZX84C30W	Z-diode	28..32V, Zzt=80Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WT	-	TZTC30WS	Z-diode	28.50..31.50V, Izt=5mA, Zzt=80Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WT1	-	BZX84-B9V1	Z-diode	9.1V±2.5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WT2	-	BZX84-C27	Z-diode	27V±5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WT3	-	BZX84-C2V4	Z-diode	2.4V±5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WT4	-	BZX84-C2V7	Z-diode	2.7V±5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WT5	-	BZX84-C30	Z-diode	30V±5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WT6	-	BZX84-C33	Z-diode	33V±5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WT7	-	BZX84-C36	Z-diode	36V±5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WT8	-	BZX84-C39	Z-diode	39V±5%, Zzt=130Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WT9	-	BZX84-C3V0	Z-diode	3.0V±5%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WTs	-	BCR166	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k, 160MHz	SOT-23	16ta	-	3c	Inf
WTs	-	BCR166F	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k, 150MHz	TSFP-3	18ta	-	3a	Inf
WTs	-	BCR166T	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k, 150MHz	SOT-416	16ta	-	3a	Inf
WTs	-	BCR166W	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k, 160MHz	SOT-323	16ta	-	3c	Inf
WU	-	BZX84B33	Z-diode	32.34..33.66V, Zzt=80Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WU	-	BZX84C33	Z-diode	31..35V, Zzt=80Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WU	-	BZX84C33W	Z-diode	31..35V, Zzt=80Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WU	-	TZTC33WS	Z-diode	31.35..34.65V, Izt=5mA, Zzt=80Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WU1	-	CHDTA114WUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=10k/4.7k	SOT-323	16ta	-	3a	Chm
WU2	-	CHDTA144WUPT	Si-pnp-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/22k	SOT-323	16ta	-	3a	Chm
WUA	-	CHDTC114WUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=10k/4.7k	SOT-323	16ta	-	3a	Chm
WUB	-	CHDTC144WUPT	Si-npn-Digi	Sw, 50V, 30mA, 250MHz, R1/R2=47k/22k	SOT-323	16ta	-	3a	Chm
WUs	-	BCR162	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k, 200MHz	SOT-23	16ta	-	3c	Inf
WUs	-	BCR162F	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k, 140MHz	TSFP-3	18ta	-	3a	Inf
WUs	-	BCR162T	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k, 140MHz	SOT-416	16ta	-	3a	Inf
WV1	-	BAS31	Si-diode	Dual, GP, Contr, Aval., 90V, 250mA, 250mW, 35pF, <50ns	SOT-23	16dl	-	3a	PhC
WV2	-	BAS35	Si-diode	Dual, GP, Contr, Aval., 90V, 250mA, 250mW, 35pF, <50ns	SOT-23	16df	-	3a	PhC
WV2	-	BFQ67W	Si-npn	UHF-A, LN, 20V, 50mA, 200mW, B=65..150, 7.5GHz	SOT-323	16ta	-	3a	Sil
WV3	-	BAT54A	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16df	-	3a	PhC
WV4	-	BAT54S	Si-diode	Dual, Schottky Rectifier, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-23	16dl	-	3a	PhC
WV5	-	BAV23S	Si-diode	Dual, GP, 200V, 225mA, Vs<1.25V(200mA), <50ns	SOT-23	16dl	-	3a	PhC
WVs	-	BCR129	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=10k, 150MHz	SOT-23	16ta	-	3c	Inf
WVs	-	BCR129F	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=10k, 150MHz	TSFP-3	18ta	-	3a	Inf
WVs	-	BCR129T	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=10k, 150MHz	SOT-416	16ta	-	3a	Inf
WW	-	BZX84B36	Z-diode	35.28..36.72V, Zzt=90Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WW	-	BZX84C36	Z-diode	34..38V, Zzt=90Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WW	-	BZX84C36W	Z-diode	34..38V, Zzt=90Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WW	-	TZTC36WS	Z-diode	34.20..37.80V, Izt=5mA, Zzt=90Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WW3	-	CMPZDA2V4	Z-diode	Dual, 2.4V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
WW4	-	CMPZDA2V7	Z-diode	Dual, 2.7V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
WW5	-	CMPZDA3V0	Z-diode	Dual, 3V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
WW6	-	CMPZDA3V3	Z-diode	Dual, 3.3V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
WW7	-	CMPZDA3V6	Z-diode	Dual, 3.6V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
WW8	-	CMPZDA3V9	Z-diode	Dual, 3.9V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
WW9	-	CMPZDA4V3	Z-diode	Dual, 4.3V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
WWs	-	BCR179F	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=10k, 150MHz	TSFP-3	18ta	-	3a	Inf
WWs	-	BCR179T	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=10k, 150MHz	SOT-416	16ta	-	3a	Inf
WX	-	2SC6033	Si-npn	Sw, 100V, 2.5A, 1W, 25/470nS, B=250...400	SOT-23	16ta	-	3a	Tos
WX	-	BZX84B39	Z-diode	38.22..39.78V, Zzt=130Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WX	-	BZX84C39	Z-diode	37..41V, Zzt=130Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WX	-	BZX84C39W	Z-diode	37..41V, Zzt=130Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WX	-	TZTC39WS	Z-diode	37.05..40.95V, Izt=5mA, Zzt=130Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WXs	-	BCR196	Si-pnp-Digi	Sw, 50V, 70mA, 200mW, R1/R2=47k/22k, 150MHz	SOT-23	16ta	-	3c	Inf
WXs	-	BCR196F	Si-pnp-Digi	Sw, 50V, 70mA, 250mW, R1/R2=47k/22k, 150MHz	TSFP-3	18ta	-	3a	Inf
WXs	-	BCR196T	Si-pnp-Digi	Sw, 50V, 70mA, 250mW, R1/R2=47k/22k, 150MHz	SOT-416	16ta	-	3a	Inf
WXs	-	BCR196W	Si-pnp-Digi	Sw, 50V, 70mA, 200mW, R1/R2=47k/22k, 150MHz	SOT-323	16ta	-	3c	Inf
WY	-	2SC2859-GR	Si-npn	AF, 35V, 500mA, 150mW, B=200..400, 200MHz	SC-59	16ta	-	3a	Tos
WY	-	2SC2859-Y	Si-npn	AF, 35V, 500mA, 150mW, B=120..240, 200MHz	SC-59	16ta	-	3a	Tos
WY	-	2SC3915	Si-npn-Digi	Sw, 50V, 500mA, 200mW, 250MHz, R1/R2=2k2/2k2	SOT-23	16ta	-	3a	San
WY	-	2SC4118-Y	Si-npn	AF-Drv, Sw, 35V, 500mA, 100mW, B=120..240, 200MHz	SOT-323	16ta	-	3a	Tos
WY	-	BZX84B43	Z-diode	42.14..43.86V, Zzt=150Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WY	-	BZX84C43	Z-diode	40..46V, Zzt=150Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WY	-	BZX84C43W	Z-diode	40..46V, Zzt=150Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WY	-	KTC3876S-Y	Si-npn	GP, 35V, 500mA, 150mW, B=120..240, 200MHz	SOT-23	16ta	-	3f	Kec
WY	-	TZTC43WS	Z-diode	40.85..45.15V, Izt=5mA, Zzt=150Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WY1	-	BZX84-B33	Z-diode	33V±2.5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WY2	-	BZX84-B36	Z-diode	36V±2.5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WYs	-	BCR139	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1=22k, 150MHz	SOT-23	16ta	-	3c	Inf
WYs	-	BCR139F	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=22k, 150MHz	TSFP-3	18ta	-	3a	Inf
WYs	-	BCR139T	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=22k, 150MHz	SOT-416	16ta	-	3a	Inf
WZ	-	BZX84B47	Z-diode	46.06..47.94V, Zzt=170Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
WZ	-	BZX84C47	Z-diode	44..50V, Zzt=170Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
WZ	-	BZX84C47W	Z-diode	44..50V, Zzt=170Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
WZ	-	TZTC47WS	Z-diode	44.65..49.35V, Izt=5mA, Zzt=170Ω, 200mW	SOT-323	16dc	-	3a	Ttr
WZ0	-	BZX84-B2V4	Z-diode	2.4V±2.5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WZ1	-	BZX84-B2V7	Z-diode	2.7V±2.5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WZ4	-	BZX84-B30	Z-diode	30V±2.5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WZ5	-	BZX84-B27	Z-diode	27V±2.5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WZ6	-	BZX84-B11	Z-diode	11V±2.5%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WZ7	-	BZX84-B12	Z-diode	12V±2.5%, Zzt=25Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WZ8	-	BZX84-B13	Z-diode	13V±2.5%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WZ9	-	BZX84-B15	Z-diode	15V±2.5%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
WZL	-	PDTA123TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=2.2k	SOT-23	16ta	-	3a	NxC
WZM	-	PDTC123TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=2.2k	SOT-23	16ta	-	3a	NxC
WZs	-	BCR142	Si-npn-Digi	Sw, 50V, 100mA, 200mW, R1/R2=22k/47k, 150MHz	SOT-23	16ta	-	3c	Inf
WZs	-	BCR142F	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k, 150MHz	TSFP-3	18ta	-	3a	Inf
WZs	-	BCR142T	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k, 150MHz	SOT-416	16ta	-	3a	Inf
WZs	-	BCR142W	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k, 150MHz	SOT-323	16ta	-	3c	Inf
x	-	AX6904CA	Vdet-IC	4.0V±1.5%, +Reset PPO	SC-70	16vda	VD7	3b	Axl
X	cr	ELM7555NEB	Vdet-IC	5.5V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
X	cs	ELM7555CEB	Vdet-IC	5.5V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
X_	-	2SB1051K	Si-pnp	AF-Drv, 32V, 1A, 200mW, B=390, 150MHz	SOT-346	16ta	-	3a	Rhm
X0	cq	ELM7550NBB	Vdet-IC	5.0V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
X0	ct	ELM7550CBB	Vdet-IC	5.0V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
X1	-	2SK852-X1	n-FET	GP, 50V, 10mA, 150mW, Idss=0.5..3mA, Up<1.5V	SOT-323	16fa	-	3a	Nec
X1	-	2SK94-1	n-FET	GP, 50V, 20mA, 150mW, Idss=0.5..1.5mA, Up<1.5V	SOT-23	16fa	-	3a	Nec
X1	-	BFT93	Si-pnp	UHF-A, 15V, 35mA, 5GHz	SOT-23	16ta	-	3a	Sie
X1	-	BZX88-C27	Z-diode	27V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
X1	-	TC1272-10ENB	Vdet-IC	4.37V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Mcc
X1	cq	ELM7551NBB	Vdet-IC	5.1V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
X1	ct	ELM7551CBB	Vdet-IC	5.1V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
X11	-	2SK425-11	n-FET	AF, 50V, 30mA, 200mW, Idss=1..4mA, Up<1.2V	SOT-23	16fa	-	3a	Nec
X12	-	2SK425-12	n-FET	AF, 50V, 30mA, 200mW, Idss=3..6mA, Up<1.2V	SOT-23	16fa	-	3a	Nec
X13	-	2SK425-13	n-FET	AF, 50V, 30mA, 200mW, Idss=5..8mA, Up<1.2V	SOT-23	16fa	-	3a	Nec
X14	-	2SK425-14	n-FET	AF, 50V, 30mA, 200mW, Idss=7..10mA, Up<1.2V	SOT-23	16fa	-	3a	Nec
X15	-	2SK425-15	n-FET	AF, 50V, 30mA, 200mW, Idss=9..12mA, Up<1.2V	SOT-23	16fa	-	3a	Nec
X16	-	2SK425-16	n-FET	AF, 50V, 30mA, 200mW, Idss=11..14mA, Up<1.2V	SOT-23	16fa	-	3a	Nec
X17	-	2SK425-17	n-FET	AF, 50V, 30mA, 200mW, Idss=13..16mA, Up<1.2V	SOT-23	16fa	-	3a	Nec
X18	-	2SK425-18	n-FET	AF, 50V, 30mA, 200mW, Idss=15..18mA, Up<1.2V	SOT-23	16fa	-	3a	Nec
X1p	-	BFT93	Si-pnp	UHF-A, 15V, 35mA, 5GHz	SOT-23	16ta	-	3a	Phi
X2	-	2SK852-X2	n-FET	GP, 50V, 10mA, 150mW, Idss=2..5mA, Up<1.5V	SOT-323	16fa	-	3a	Nec

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
X2	-	2SK94-2	n-FET	GP, 50V, 20mA, 150mW, Idss=1..3mA, Up<1.5V	SOT-23	16fa	-	3a	Nec
X2	-	APX809-46SA	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Di
X2	-	BZX84B56	Z-diode	54.88..57.12V, Zzt=135Ω, Izt=2.5mA, 410mW	SOT-23	16dc	-	3a	Pjt
X2	-	BZX88-C30	Z-diode	30V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
X2	-	BZX99-C13	Z-diode	13V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
X2	-	TC1272-15ENB	Vdet-IC	4.12V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Mcc
X2	cq	ELM7552NBB	Vdet-IC	5.2V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
X2	ct	ELM7552CBB	Vdet-IC	5.2V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
X21	-	2SK426-21	n-FET	AF, LN, 50V, 30mA, 200mW, Idss=1..4mA, Up<1.2V	SOT-23	16fa	-	3a	Nec
X22	-	2SK426-22	n-FET	AF, LN, 50V, 30mA, 200mW, Idss=3..6mA, Up<1.2V	SOT-23	16fa	-	3a	Nec
X23	-	2SK426-23	n-FET	AF, LN, 50V, 30mA, 200mW, Idss=5..8mA, Up<1.2V	SOT-23	16fa	-	3a	Nec
X24	-	2SK426-24	n-FET	AF, LN, 50V, 30mA, 200mW, Idss=7..10mA, Up<1.2V	SOT-23	16fa	-	3a	Nec
X25	-	2SK426-25	n-FET	AF, LN, 50V, 30mA, 200mW, Idss=9..12mA, Up<1.2V	SOT-23	16fa	-	3a	Nec
X26	-	2SK426-26	n-FET	AF, LN, 50V, 30mA, 200mW, Idss=11..14mA, Up<1.2V	SOT-23	16fa	-	3a	Nec
X27	-	2SK426-27	n-FET	AF, LN, 50V, 30mA, 200mW, Idss=13..16mA, Up<1.2V	SOT-23	16fa	-	3a	Nec
X28	-	2SK426-28	n-FET	AF, LN, 50V, 30mA, 200mW, Idss=15..18mA, Up<1.2V	SOT-23	16fa	-	3a	Nec
X3	-	2SK852-X3	n-FET	GP, 50V, 10mA, 150mW, Idss=4..8mA, Up<1.5V	SOT-323	16fa	-	3a	Nec
X3	-	2SK94-3	n-FET	GP, 50V, 20mA, 150mW, Idss=2..6mA, Up<1.5V	SOT-23	16fa	-	3a	Nec
X3	-	APX809-44SA	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Di
X3	-	BZX84B62	Z-diode	60.76..63.24V, Zzt=150Ω, Izt=2.5mA, 410mW	SOT-23	16dc	-	3a	Pjt
X3	-	BZX88-C33	Z-diode	33V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
X3	-	BZX99-C15	Z-diode	15V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
X3	-	RN1131F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1=100k	SOT-490	18ta	-	3a	Tos
X3	-	RN1131FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1=100k	SOT-723	18ta	-	3a	Tos
X3	-	TC1272-5ENB	Vdet-IC	4.62V±1%, -Reset PPO	SOT-23	16vdb	VD7	3d	Mcc
X3	cq	ELM7553NBB	Vdet-IC	5.3V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
X3	ct	ELM7553CBB	Vdet-IC	5.3V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
X31	-	2SK515-31	n-FET	Analog Sw, 50V, 20mA, 250mW, Idss=1..2mA, Up<4,5V	SOT-23	16fa	-	3a	Nec
X32	-	2SK515-32	n-FET	Analog Sw, 50V, 20mA, 250mW, Idss=1.5..3mA, Up<4,5V	SOT-23	16fa	-	3a	Nec
X33	-	2SK515-33	n-FET	Analog Sw, 50V, 20mA, 250mW, Idss=2.5..5mA, Up<4,5V	SOT-23	16fa	-	3a	Nec
X34	-	2SK515-34	n-FET	Analog Sw, 50V, 20mA, 250mW, Idss=4..8mA, Up<4,5V	SOT-23	16fa	-	3a	Nec
X35	-	2SK515-35	n-FET	Analog Sw, 50V, 20mA, 250mW, Idss=6..12mA, Up<4,5V	SOT-23	16fa	-	3a	Nec
X4	-	2SK852-X4	n-FET	GP, 50V, 10mA, 150mW, Idss=6..12mA, Up<1.5V	SOT-323	16fa	-	3a	Nec
X4	-	2SK94-4	n-FET	GP, 50V, 20mA, 150mW, Idss=4..12mA, Up<1.5V	SOT-23	16fa	-	3a	Nec
X4	-	APX809-40SA	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Di
X4	-	BZX84B68	Z-diode	66.64..69.36V, Zzt=200Ω, Izt=2.5mA, 410mW	SOT-23	16dc	-	3a	Pjt
X4	-	BZX88-C36	Z-diode	36V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
X4	-	KA4F4N	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1/R2=22k/47k	SOT-416	16ta	-	3a	Nec
X4	-	RN1132F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1=200k	SOT-490	18ta	-	3a	Tos
X4	-	RN1132FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1=200k	SOT-723	18ta	-	3a	Tos
X4	-	SP809NEK-2-9	Vdet-IC	2.9V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Sip
X4	cq	ELM7554NBB	Vdet-IC	5.4V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
X4	ct	ELM7554CBB	Vdet-IC	5.4V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
X4-	-	BAS21W	Si-diode	Sw, Fast, 250V, 250mA, 250mW, <50ns	SOT-323	16dc	-	3a	NxH
X41	-	2SK1001-41	n-FET	AM-tuner, 22V, 50mA, 250mW, Idss=10..20mA, Vr<30mΩ	SOT-23	16fa	-	3a	Nec
X42	-	2SK1001-42	n-FET	AM-tuner, 22V, 50mA, 250mW, Idss=150..30mA, Vr<30mΩ	SOT-23	16fa	-	3a	Nec
X43	-	2SK1001-43	n-FET	AM-tuner, 22V, 50mA, 250mW, Idss=25..50mA, Vr<30mΩ	SOT-23	16fa	-	3a	Nec
X4p	-	BAS21W	Si-diode	Sw, Fast, 250V, 250mA, 250mW, <50ns	SOT-323	16dc	-	3a	NxH
X4t	-	BAS21W	Si-diode	Sw, Fast, 250V, 250mA, 250mW, <50ns	SOT-323	16dc	-	3a	NxM
X4W	-	BAS21W	Si-diode	Sw, Fast, 250V, 250mA, 250mW, <50ns	SOT-323	16dc	-	3a	NxC
X5	-	APX809-31SA	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Di
X5	-	BZX84B75	Z-diode	73.50..76.50V, Zzt=250Ω, Izt=2.5mA, 410mW	SOT-23	16dc	-	3a	Pjt
X5	-	BZX88-C39	Z-diode	39V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
X5	cr	ELM7555NBB	Vdet-IC	5.5V±2%, +Reset ODO	SOT-23	16vdb	VD6	3d	Elm
X5	ct	ELM7555CBB	Vdet-IC	5.5V±2%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
X5-	-	BAS21SW	Si-diode	Dual, Sw, Fast, 250V, 250mA, 250mW, <50ns	SOT-323	16dl	-	3b	NxH
X5p	-	BAS21SW	Si-diode	Dual, Sw, Fast, 250V, 250mA, 250mW, <50ns	SOT-323	16dl	-	3b	NxH
X5t	-	BAS21SW	Si-diode	Dual, Sw, Fast, 250V, 250mA, 250mW, <50ns	SOT-323	16dl	-	3b	NxM
X5W	-	BAS21SW	Si-diode	Dual, Sw, Fast, 250V, 250mA, 250mW, <50ns	SOT-323	16dl	-	3b	NxC
X6	-	2SD1048-6	Si-npn	AF-Amp, 20V, 700mA, 200mW, B=200..400, 250MHz	SOT-23	16ta	-	3a	San
X6	-	APX809-29SA	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Di
X6	-	BZX88-C43	Z-diode	43V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
X6-	-	BAS21AW	Si-diode	Dual, Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-323	16df	-	3a	NxH
X6p	-	BAS21AW	Si-diode	Dual, Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-323	16df	-	3a	NxH
X6t	-	BAS21AW	Si-diode	Dual, Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-323	16df	-	3a	NxM
X6W	-	BAS21AW	Si-diode	Dual, Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SOT-323	16df	-	3a	NxC
X7	-	2SD1048-7	Si-npn	AF-Amp, 20V, 700mA, 200mW, B=300..400, 250MHz	SOT-23	16ta	-	3a	San
X7	-	APX809-26SA	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Di
X7	-	BZX88-C47	Z-diode	47V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
X7	-	KN4F4N	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1/R2=22k/47k	SOT-416	16ta	-	3a	Nec





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
X8	-	2SD1048-8	Si-npn	AF-Amp, 20V, 700mA, 200mW, B=450..900, 250MHz	SOT-23	16ta	-	3a	San
X8	-	APX809-23SA	Vdet-IC	2.25V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Di
X8	-	BZX84C6V8	Z-diode	6.4..7.2V, Zzt=15Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
X9	-	1SS398	Si-diode	Dual, Rectifier, 420V, 100mA, 500ns	SOT-23	16ea	-	3a	Tos
X9	-	BZX84C33	Z-diode	31..35V, Zzt=80Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
XA	-	2SK3105	n-MOSFET	V-MOS, LogL, 30V, ±2.5A, <0.15Ω	SOT-23	16fh	-	3a	Nec
XA	-	2SK3408	n-MOSFET	V-MOS, LogL, 43±5V, ±1A, <0.26Ω(0.5A), 32/153ns	SOT-23	16fh	-	3a	Nec
XA	-	APX810-46SA	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Di
XA	-	BZX84B51	Z-diode	49.98..52.02V, Zzt=100Ω, Izt=5mA, 410mW	SOT-23	16dc	-	3a	Pjt
XA	-	BZX84C51	Z-diode	48..54V, Zzt=180Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Wte
XA	-	BZX84C51W	Z-diode	48..54V, Zzt=180Ω, Izt=5mA, 200mW	SOT-323	16dc	-	3a	Wte
XA	-	BZX99-C4V7	Z-diode	4.7V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XA	-	RN1101	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/4.7k	SOT-416	16ta	-	3a	Tos
XA	-	RN1101F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/4.7k	SOT-490	18ta	-	3a	Tos
XA	-	RN1101FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/4.7k	TESM	18ta	-	3a	Tos
XA	-	RN1101FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=4.7k/4.7k	SOT-723	18ta	-	3a	Tos
XA	-	RN1301	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=4.7k/4.7k	SOT-323	16ta	-	3a	Tos
XA	-	RN1401	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=4.7k/4.7k	SOT-346	16ta	-	3a	Tos
XA	-	TZTC51WS	Z-diode	48.45..53.55V, Izt=5mA, Zzt=100Ω, 200mW	SOT-323	16dc	-	3a	Ttr
XAF	-	2SK980-F	n-FET	Video frequency, LN, 12V, 40mA, 150mW, Idss=8..20mA, Up<2.5V	SOT-23	16fa	-	3a	Ren
XAG	-	2SK980-G	n-FET	Video frequency, LN, 12V, 40mA, 150mW, Idss=16..32mA, Up<2.5V	SOT-23	16fa	-	3a	Ren
XAs	-	BCR503	Si-npn-Digi	Sw, 50V, 500mA, 330mW, R1/R2=2.2k/2.2k, 100MHz	SOT-23	16ta	-	3c	Inf
XB	-	2SJ557	p-MOSFET	V-MOS, LogL, 30V, ±2.5A, <0.29Ω	SOT-23	16fh	-	3a	Nec
XB	-	5LP01C	p-MOSFET	Sw, U-Hi-Sp, 50V, 70mA, 250mW, 20/250ns	SOT-23	16fh	-	3a	San
XB	-	5LP01M	p-MOSFET	Sw, U-Hi-Sp, 50V, 70mA, 150mW, 20/250ns	MCP3	16fh	-	3a	San
XB	-	5LP01S	p-MOSFET	Sw, U-Hi-Sp, 50V, 70mA, 150mW, 20/250ns	SMCP	16fh	-	3a	San
XB	-	5LP01SS	p-MOSFET	Sw, U-Hi-Sp, 50V, 70mA, 150mW, 20/250ns	SSFP	18fh	-	3a	San
XB	-	APX810-44SA	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Di
XB	-	BZX99-C5V1	Z-diode	5.1V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XB	-	RN1102	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/10k	SOT-416	16ta	-	3a	Tos
XB	-	RN1102F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/10k	SOT-490	18ta	-	3a	Tos
XB	-	RN1102FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/10k	TESM	18ta	-	3a	Tos
XB	-	RN1102FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=10k/10k	SOT-723	18ta	-	3a	Tos
XB	-	RN1302	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=10k/10k	SOT-323	16ta	-	3a	Tos
XB	-	RN1402	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=10k/10k	SOT-346	16ta	-	3a	Tos
XB_	-	2SC4416	Si-npn	UHF/VHF, 25V, 50mA, 150mW, B=50..180, 3GHz	SOT-346	16te	-	3a	Ren
XBs	-	BCR553	Si-pnp-Digi	Sw, 50V, 500mA, 330mW, R1/R2=2.2k/2.2k, 150MHz	SOT-23	16ta	-	3c	Inf
XC	-	2SK492-C	n-FET	AF-Amp, 50V, 150mW, Idss=1..3mA, Rds=70Ω(5mA)	SC-59	16fa	-	3a	Mit
XC	-	APX810-40SA	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Di
XC	-	BZX99-C5V6	Z-diode	5.6V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XC	-	CHT847BTPT-Q	Si-npn	AF, Sw, 45V, 100mA, B=110..220, 200MHz	SOT-416	16ta	-	3a	Chm
XC	-	RN1103	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=22k/22k	SOT-416	16ta	-	3a	Tos
XC	-	RN1103F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=22k/22k	SOT-490	18ta	-	3a	Tos
XC	-	RN1103FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=22k/22k	TESM	18ta	-	3a	Tos
XC	-	RN1103FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=22k/22k	SOT-723	18ta	-	3a	Tos
XC	-	RN1303	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=22k/22k	SOT-323	16ta	-	3a	Tos
XC	-	RN1403	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=22k/22k	SOT-346	16ta	-	3a	Tos
XCAV	-	YB1210ST23R120	LVR-IC	LDO, ULN, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCBV	-	YB1210ST23R130	LVR-IC	LDO, ULN, 1.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCCV	-	YB1210ST23R140	LVR-IC	LDO, ULN, 1.4V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCDV	-	YB1210ST23R150	LVR-IC	LDO, ULN, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCEV	-	YB1210ST23R160	LVR-IC	LDO, ULN, 1.6V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCFV	-	YB1210ST23R170	LVR-IC	LDO, ULN, 1.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCGV	-	YB1210ST23R180	LVR-IC	LDO, ULN, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCHV	-	YB1210ST23R190	LVR-IC	LDO, ULN, 1.9V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCIV	-	YB1210ST23R200	LVR-IC	LDO, ULN, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCJV	-	YB1210ST23R210	LVR-IC	LDO, ULN, 2.1V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCKV	-	YB1210ST23R220	LVR-IC	LDO, ULN, 2.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCLV	-	YB1210ST23R230	LVR-IC	LDO, ULN, 2.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCMV	-	YB1210ST23R240	LVR-IC	LDO, ULN, 2.4V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCNV	-	YB1210ST23R250	LVR-IC	LDO, ULN, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCOV	-	YB1210ST23R260	LVR-IC	LDO, ULN, 2.6V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCPV	-	YB1210ST23R270	LVR-IC	LDO, ULN, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCQV	-	YB1210ST23R280	LVR-IC	LDO, ULN, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCRV	-	YB1210ST23R290	LVR-IC	LDO, ULN, 2.9V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCs	-	BCR533	Si-npn-Digi	Sw, 50V, 500mA, 330mW, R1/R2=10k/10k, 100MHz	SOT-23	16ta	-	3c	Inf
XCSV	-	YB1210ST23R300	LVR-IC	LDO, ULN, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCTV	-	YB1210ST23R310	LVR-IC	LDO, ULN, 3.1V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCUV	-	YB1210ST23R320	LVR-IC	LDO, ULN, 3.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCVV	-	YB1210ST23R330	LVR-IC	LDO, ULN, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XCWV	-	YB1210ST23R340	LVR-IC	LDO, ULN, 3.4V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCXV	-	YB1210ST23R350	LVR-IC	LDO, ULN, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XCYV	-	YB1210ST23R360	LVR-IC	LDO, ULN, 3.6V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
XD	-	2SK492-D	n-FET	AF-Amp, 50V, 150mW, Idss=2.5..6mA, Rds=70Ω(5mA)	SC-59	16fa	-	3a	Mit
XD	-	APX810-31SA	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Di
XD	-	BZX99-C6V2	Z-diode	6.2V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XD	-	RN1104	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/47k	SOT-416	16ta	-	3a	Tos
XD	-	RN1104F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/47k	SOT-490	18ta	-	3a	Tos
XD	-	RN1104FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/47k	TESM	18ta	-	3a	Tos
XD	-	RN1104FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=47k/47k	SOT-723	18ta	-	3a	Tos
XD	-	RN1304	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=47k/47k	SOT-323	16ta	-	3a	Tos
XD	-	RN1404	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=47k/47k	SOT-346	16ta	-	3a	Tos
XDB	-	2SK1031-B	n-FET	AF, 50V, 10mA, 100mW, Idss=0.6..1.4mA, Up<5V	SOT-23	16fa	-	3a	Ren
XDB	-	2SK1532-B	n-FET	AF, Sw, 50V, 19mA, 100mW, Idss=0.6..1.4mA	CMPAK	16fa	-	3a	Hit
XDC	-	2SK1031-C	n-FET	AF, 50V, 10mA, 100mW, Idss=1.2..3mA, Up<5V	SOT-23	16fa	-	3a	Ren
XDC	-	2SK1532-C	n-FET	AF, Sw, 50V, 19mA, 100mW, Idss=1.2..3mA	CMPAK	16fa	-	3a	Hit
XDD	-	2SK1031-D	n-FET	AF, 50V, 10mA, 100mW, Idss=2.6..6.5mA, Up<5V	SOT-23	16fa	-	3a	Ren
XDD	-	2SK1532-D	n-FET	AF, Sw, 50V, 19mA, 100mW, Idss=2.6..6.5mA	CMPAK	16fa	-	3a	Hit
XDs	-	BCR555	Si-pnp-Digi	Sw, 50V, 500mA, 330mW, R1/R2=2.2k/10k, 100MHz	SOT-23	16ta	-	3c	Inf
XE	-	2SK492-E	n-FET	AF-Amp, 50V, 150mW, Idss=5..12mA, Rds=70Ω(5mA)	SC-59	16fa	-	3a	Mit
XE	-	5LP02C	p-MOSFET	Sw, U-Hi-Sp, 50V, 140mA, 250mW, 20/250ns	SOT-23	16fh	-	3a	San
XE	-	APX810-29SA	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Di
XE	-	BZX99-C6V8	Z-diode	6.8V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XE	-	RN1105	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=2.2k/47k	SOT-416	16ta	-	3a	Tos
XE	-	RN1105F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=2.2k/47k	SOT-490	18ta	-	3a	Tos
XE	-	RN1105FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=2.2k/47k	TESM	18ta	-	3a	Tos
XE	-	RN1105FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=2.2k/47k	SOT-723	18ta	-	3a	Tos
XE	-	RN1305	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=2.2k/47k	SOT-323	16ta	-	3a	Tos
XE	-	RN1405	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=2.2k/47k	SOT-346	16ta	-	3a	Tos
XE1	-	CHDTA143XEPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/10k	SOT-416	16ta	-	3a	Chm
XE2	-	CHDTA124XEPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=22k/47k	SOT-416	16ta	-	3a	Chm
XEA	-	CHDTC143XEPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/10k	SOT-416	16ta	-	3a	Chm
XEAV	-	YB1230ST23X180	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XEB	-	CHDTC124XEPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=22k/47k	SOT-416	16ta	-	3a	Chm
XEBV	-	YB1230ST23X190	LVR-IC	LDO, 1.9V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XECV	-	YB1230ST23X200	LVR-IC	LDO, 2.0V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XEDV	-	YB1230ST23X210	LVR-IC	LDO, 2.1V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XEEV	-	YB1230ST23X220	LVR-IC	LDO, 2.2V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XEFV	-	YB1230ST23X230	LVR-IC	LDO, 2.3V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XEGV	-	YB1230ST23X240	LVR-IC	LDO, 2.4V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XEHV	-	YB1230ST23X250	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XEIV	-	YB1230ST23X260	LVR-IC	LDO, 2.6V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XEJV	-	YB1230ST23X270	LVR-IC	LDO, 2.7V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XEKV	-	YB1230ST23X280	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XELV	-	YB1230ST23X290	LVR-IC	LDO, 2.9V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XEMV	-	YB1230ST23X300	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XENV	-	YB1230ST23X310	LVR-IC	LDO, 3.1V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XF	-	5HP02C	p-MOSFET	Sw, U-Hi-Sp, 50V, 140mA, 250mW, 13/190ns, 4.7Ω(70mA)	SOT-23	16fh	-	3a	San
XF	-	5HP02M	p-MOSFET	Sw, U-Hi-Sp, 50V, 140mA, 150mW, 13/190ns, 4.7Ω(70mA)	MCP3	16fh	-	3a	San
XF	-	APX810-26SA	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Di
XF	-	RN1106	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/47k	SOT-416	16ta	-	3a	Tos
XF	-	RN1106F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/47k	SOT-490	18ta	-	3a	Tos
XF	-	RN1106FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/47k	TESM	18ta	-	3a	Tos
XF	-	RN1106FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=4.7k/47k	SOT-723	18ta	-	3a	Tos
XF	-	RN1306	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=4.7k/47k	SOT-323	16ta	-	3a	Tos
XF	-	RN1406	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=4.7k/47k	SOT-346	16ta	-	3a	Tos
XF-	-	2SC4464	Si-npn	VHF/UHF, 15V, 5mA, 50mW, B=40..250, >2.5GHz	SOT-323	16ta	-	3a	Ren
XFs	-	BCR512	Si-npn-Digi	Sw, 50V, 500mA, 330mW, R1/R2=4.7k/4.7k, 100MHz	SOT-23	16ta	-	3c	Inf
XG	-	2SK209-GR	n-FET	GP, 50V, 10mA, 150mW, Idss=2.6..6.5mA	SOT-23	16fa	-	3a	Tos
XG	-	2SK880-GR	n-FET	AF-Amp, 50V, 10mA, 100mW, Idss=2.6..6.5mA, Up<1.5V	SOT-323	16fa	-	3a	Tos
XG	-	APX810-23SA	Vdet-IC	2.25V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Di
XGs	-	BCR523	Si-npn-Digi	Sw, 50V, 500mA, 330mW, R1/R2=1k/10k, 100MHz	SOT-23	16ta	-	3c	Inf
XH	-	RN1107	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/47k	SOT-416	16ta	-	3a	Tos
XH	-	RN1107F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/47k	SOT-490	18ta	-	3a	Tos
XH	-	RN1107FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/47k	TESM	18ta	-	3a	Tos
XH	-	RN1107FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=10k/47k	SOT-723	18ta	-	3a	Tos
XH	-	RN1307	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=10k/47k	SOT-323	16ta	-	3a	Tos
XH	-	RN1407	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=10k/47k	SOT-346	16ta	-	3a	Tos
XH	-	RN2107FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/47k	TESM	18ta	-	3a	Tos
XH	-	RN2107FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=10k/47k	SOT-723	18ta	-	3a	Tos



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XHs	-	BCR573	Si-pnp-Digi	Sw, 50V, 500mA, 330mW, R1/R2=1k/10k, 100MHz	SOT-23	16ta	-	3c	Inf
XI	-	RN1108	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=22k/47k	SOT-416	16ta	-	3a	Tos
XI	-	RN1108F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=22k/47k	SOT-490	18ta	-	3a	Tos
XI	-	RN1108FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=22k/47k	TESM	18ta	-	3a	Tos
XI	-	RN1108FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=22k/47k	SOT-723	18ta	-	3a	Tos
XI	-	RN1308	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=22k/47k	SOT-323	16ta	-	3a	Tos
XI	-	RN1408	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=22k/47k	SOT-346	16ta	-	3a	Tos
XI	-	RN2108F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=22k/47k	SOT-490	18ta	-	3a	Tos
XI	-	RN2108FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=22k/47k	TESM	18ta	-	3a	Tos
XI	-	RN2108FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=22k/47k	SOT-723	18ta	-	3a	Tos
XJ	-	2SK2273	n-MOSFET	V-MOS, LogL, 20V, 500mA, <0.75Ω	SOT-23	16fh	-	3a	San
XJ	-	RN1109	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/22k	SOT-416	16ta	-	3a	Tos
XJ	-	RN1109F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/22k	SOT-490	18ta	-	3a	Tos
XJ	-	RN1109FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/22k	TESM	18ta	-	3a	Tos
XJ	-	RN1109FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=47k/22k	SOT-723	18ta	-	3a	Tos
XJ	-	RN1309	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=47k/22k	SOT-323	16ta	-	3a	Tos
XJ	-	RN1409	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=47k/22k	SOT-346	16ta	-	3a	Tos
XJ	-	RN2109F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/22k	SOT-490	18ta	-	3a	Tos
XJ	-	RN2109FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/22k	TESM	18ta	-	3a	Tos
XJ	-	RN2109FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=47k/22k	SOT-723	18ta	-	3a	Tos
XJCV	-	YB1231ST23X320	LVR-IC	LDO, 3.2V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XJDV	-	YB1231ST23X330	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XJEV	-	YB1231ST23X340	LVR-IC	LDO, 3.4V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XJFV	-	YB1231ST23X350	LVR-IC	LDO, 3.5V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XJGV	-	YB1231ST23X360	LVR-IC	LDO, 3.6V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XJHV	-	YB1231ST23X370	LVR-IC	LDO, 3.7V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XJIV	-	YB1231ST23X380	LVR-IC	LDO, 3.8V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XJJV	-	YB1231ST23X390	LVR-IC	LDO, 3.9V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XJKV	-	YB1231ST23X400	LVR-IC	LDO, 4.0V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XJLV	-	YB1231ST23X410	LVR-IC	LDO, 4.1V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XJMV	-	YB1231ST23X420	LVR-IC	LDO, 4.2V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XJNV	-	YB1231ST23X430	LVR-IC	LDO, 4.3V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XJOV	-	YB1231ST23X440	LVR-IC	LDO, 4.4V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XJPV	-	YB1231ST23X450	LVR-IC	LDO, 4.5V±2%, 600mA	SOT-23	16cg	VR1	3a	Ybn
XK	-	12A02S	Si-pnp	AF, GP, 15V, 500mA, 200mW, B=300..700, 450MHz	SMCP	16ta	-	3a	San
XK	-	12A02SS	Si-pnp	AF, GP, 15V, 500mA, 200mW, B=300..700, 450MHz	SSFP	18ta	-	3a	San
XK	-	RN1110	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1=4.7k	SOT-416	16ta	-	3a	Tos
XK	-	RN1110F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1=4.7k	SOT-490	18ta	-	3a	Tos
XK	-	RN1110FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1=4.7k	TESM	18ta	-	3a	Tos
XK	-	RN1110FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1=4.7k	SOT-723	18ta	-	3a	Tos
XK	-	RN1310	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1=4.7k	SOT-323	16ta	-	3a	Tos
XK	-	RN1410	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1=4.7k	SOT-346	16ta	-	3a	Tos
XK	-	RN2110F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1=4.7k	SOT-490	18ta	-	3a	Tos
XK	-	RN2110FS	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, R1=4.7k	fSM	19ta	-	3a	Tos
XK	-	RN2110FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1=4.7k	SOT-723	18ta	-	3a	Tos
XK1	-	CHDTA143XKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/10k	SOT-23	16ta	-	3a	Chm
XK2	-	CHDTA124XKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=22k/47k	SOT-23	16ta	-	3a	Chm
XKA	-	CHDTC143XKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/10k	SOT-23	16ta	-	3a	Chm
XKB	-	CHDTC124XKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=22k/47k	SOT-23	16ta	-	3a	Chm
XKs	-	BCR519	Si-npn-Digi	Sw, 50V, 500mA, 330mW, R1=4.7k, 100MHz	SOT-23	16ta	-	3c	Inf
XL	-	2SA1597	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/47k	SOT-23	16ta	-	3a	San
XL	-	2SK209-BL	n-FET	GP, 50V, 10mA, 150mW, Idss=6..14mA	SOT-23	16fa	-	3a	Tos
XL	-	2SK880-BL	n-FET	AF-Amp, 50V, 10mA, 100mW, Idss=6..14mA, Up<1.5V	SOT-323	16fa	-	3a	Tos
XL	-	BZX99-C2V4	Z-diode	2.4V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XLA	-	2SK1479A	n-FET	AF, 25V, 5mA, 100mW, Idss=0.3..0.8mA	MPAK	16fa	-	3a	Hit
XLB	-	2SK1479B	n-FET	AF, 25V, 5mA, 100mW, Idss=0.6..1.4mA	MPAK	16fa	-	3a	Hit
XLs	-	BCR569	Si-pnp-Digi	Sw, 50V, 500mA, 330mWmW, R1=4.7k, 150MHz	SOT-23	16ta	-	3c	Inf
XM	-	1SS294	Si-diode	SBD, 45V, 100mA, Vf<0.6V(100mA)	SOT-23	16dc	-	3a	Sme
XM	-	30A02S	Si-pnp	AF, GP, 30V, 600mA, 200mW, B=200..500, 520MHz	SMCP	16ta	-	3a	San
XM	-	30A02SS	Si-pnp	AF, GP, 30V, 600mA, 200mW, B=200..500, 520MHz	SSFP	18ta	-	3a	San
XM	-	BZX99-C2V7	Z-diode	2.7V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XM	-	RN1111	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1=10k	SOT-416	16ta	-	3a	Tos
XM	-	RN1111F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1=10k	SOT-490	18ta	-	3a	Tos
XM	-	RN1111FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1=10k	TESM	18ta	-	3a	Tos
XM	-	RN1111FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1=10k	SOT-723	18ta	-	3a	Tos
XM	-	RN1311	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1=10k	SOT-323	16ta	-	3a	Tos
XM	-	RN1411	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1=10k	SOT-346	16ta	-	3a	Tos
XM	-	RN2111F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1=10k	SOT-490	18ta	-	3a	Tos
XM	-	RN2111FS	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, R1=10k	fSM	19ta	-	3a	Tos
XM	-	RN2111FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1=10k	SOT-723	18ta	-	3a	Tos



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XM-	-	2SC4593	Si-npn	VHF/UHF, 15V, 50mA, 100mW, B=40..250, >6.5GHz	SOT-323	16ta	-	3a	Ren
XM_	-	2SC4591	Si-npn	UHF/VHF, 15V, 50mA, 150mW, B=40..250, >6.5GHz	SOT-346	16ta	-	3a	Ren
XMs	-	BCR583	Si-pnp-Digi	Sw, 50V, 500mA, 330mW, R1/R2=10k/10k, 150MHz	SOT-23	16ta	-	3c	Inf
XN	-	50A02S	Si-pnp	AF, GP, 50V, 400mA, 200mW, B=200..500, 690MHz	SMCP	16ta	-	3a	San
XN	-	50A02SS	Si-pnp	AF, GP, 50V, 400mA, 200mW, B=200..500, 690MHz	SSFP	18ta	-	3a	San
XN	-	BZX99-C3V0	Z-diode	3V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XN	-	RN1112	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1=22k	SC-59	16ta	-	3a	Tos
XN	-	RN1112F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1=22k	SOT-490	18ta	-	3a	Tos
XN	-	RN1112FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1=22k	TESM	18ta	-	3a	Tos
XN	-	RN1112FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1=22k	SOT-723	18ta	-	3a	Tos
XN	-	RN1312	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1=22k	SOT-323	16ta	-	3a	Tos
XN	-	RN1412	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1=22k	SOT-346	16ta	-	3a	Tos
XN	-	RN2112F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1=22k	SOT-490	18ta	-	3a	Tos
XN	-	RN2112FS	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, R1=22k	fSM	19ta	-	3a	Tos
XN	-	RN2112FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1=22k	SOT-723	18ta	-	3a	Tos
XN	-	RN2412	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1=22k	SC-59	16ta	-	3a	Tos
XO	-	2SK209-O	n-FET	GP, 50V, 10mA, 150mW, Idss=0.6..1.4mA	SOT-23	16fa	-	3a	Tos
XP	-	12A01C	Si-pnp	AF, GP, 15V, 500mA, 300mW, B=300..700, 490MHz	CP	16ta	-	3a	San
XP	-	12A01M	Si-pnp	AF, GP, 15V, 500mA, 300mW, B=300..700, 490MHz	MCP	16ta	-	3a	San
XP	-	12A01S	Si-pnp	AF, GP, 15V, 500mA, 200mW, B=300..700, 490MHz	SMCP	16ta	-	3a	San
XP	-	12A01SS	Si-pnp	AF, GP, 15V, 500mA, 200mW, B=300..700, 490MHz	SSFP	18ta	-	3a	San
XP	-	BZX99-C3V3	Z-diode	3.3V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XP	-	MMBD3000	Si-diode	Sw, 30V, 200mA, 225mW, Vf<0.95V(10mA), <2pF	SOT-346	16dc	-	3a	Mot
XP	-	RN1113	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1=47k	SOT-416	16ta	-	3a	Tos
XP	-	RN1113F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1=47k	SOT-490	18ta	-	3a	Tos
XP	-	RN1113FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1=47k	TESM	18ta	-	3a	Tos
XP	-	RN1113FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1=47k	SOT-723	18ta	-	3a	Tos
XP	-	RN1313	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1=47k	SOT-323	16ta	-	3a	Tos
XP	-	RN1413	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1=47k	SOT-346	16ta	-	3a	Tos
XP	-	RN2113F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1=47k	SOT-490	18ta	-	3a	Tos
XP	-	RN2113FS	Si-pnp-Digi	Sw, 20V, 50mA, 50mW, R1=47k	fSM	19ta	-	3a	Tos
XP	-	RN2113FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1=47k	SOT-723	18ta	-	3a	Tos
XP	-	RN2413	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1=47k	SC-59	16ta	-	3a	Tos
XQ	-	2PD602AQ	Si-npn	GP, Sw, 60V, 500mA, 250mW, B=85..170, >140MHz	SC-59	16ta	-	3a	Phi
XQ	-	2SD1820A-Q	Si-npn	GP, 60V, 500mA, 150mW, B=85..170, 20MHz	SOT-323	16ta	-	3a	Pan
XQ	-	2SD602A-Q	Si-npn	GP, AF, 60V, 500mA, 200mW, B=85..170, 200MHz	SC-59	16ta	-	3a	Pan
XQ	-	30A01C	Si-pnp	AF, GP, 30V, 300mA, 300mW, B=200..500, 520MHz	CP	16ta	-	3a	San
XQ	-	30A01M	Si-pnp	AF, GP, 30V, 300mA, 300mW, B=200..500, 520MHz	MCP	16ta	-	3a	San
XQ	-	30A01S	Si-pnp	AF, GP, 30V, 300mA, 200mW, B=200..500, 520MHz	SMCP	16ta	-	3a	San
XQ	-	30A01SS	Si-pnp	AF, GP, 30V, 300mA, 200mW, B=200..500, 520MHz	SSFP	18ta	-	3a	San
XQ	-	MMBD3005	Si-diode	Dual, Sw, 30V, 200mA, 225mW, Vf<0.95V(10mA), <2pF	SOT-346	16df	-	3a	Mot
XQ	-	RN1114	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=1k/10k	SOT-416	16ta	-	3a	Tos
XQ	-	RN1114F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=1k/10k	SOT-490	18ta	-	3a	Tos
XQ	-	RN1114FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=1k/10k	TESM	18ta	-	3a	Tos
XQ	-	RN1114FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=1k/10k	SOT-723	18ta	-	3a	Tos
XQ	-	RN1314	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=1k/10k	SOT-323	16ta	-	3a	Tos
XQ	-	RN1414	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=1k/10k	SOT-346	16ta	-	3a	Tos
XQ	-	RN2114F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=1k/10k	SOT-490	18ta	-	3a	Tos
XQ	-	RN2114FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=1k/10k	TESM	18ta	-	3a	Tos
XR	-	2PD602AR	Si-npn	GP, Sw, 60V, 500mA, 250mW, B=120..240, >160MHz	SC-59	16ta	-	3a	Phi
XR	-	2SD1820A-R	Si-npn	GP, 60V, 500mA, 150mW, B=120..240, 20MHz	SOT-323	16ta	-	3a	Pan
XR	-	2SD602A-R	Si-npn	GP, AF, 60V, 500mA, 200mW, B=120..240, 200MHz	SC-59	16ta	-	3a	Pan
XR	-	BZX99-C3V6	Z-diode	3.6V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XS	-	2PD602AS	Si-npn	GP, Sw, 60V, 500mA, 250mW, B=170..340, >180MHz	SC-59	16ta	-	3a	Phi
XS	-	2SD1820A-S	Si-npn	GP, 60V, 500mA, 150mW, B=170..340, 20MHz	SOT-323	16ta	-	3a	Pan
XS	-	2SD602A-S	Si-npn	GP, AF, 60V, 500mA, 200mW, B=170..340, 200MHz	SC-59	16ta	-	3a	Pan
XS	-	BZX99-C3V9	Z-diode	3.9V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XS	-	RN1115	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=2.2k/10k	SOT-416	16ta	-	3a	Tos
XS	-	RN1115F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=2.2k/10k	SOT-490	18ta	-	3a	Tos
XS	-	RN1115FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=2.2k/10k	TESM	18ta	-	3a	Tos
XS	-	RN1115FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=2.2k/10k	SOT-723	18ta	-	3a	Tos
XS	-	RN1315	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=2.2k/10k	SOT-323	16ta	-	3a	Tos
XS	-	RN1415	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=2.2k/10k	SOT-346	16ta	-	3a	Tos
XS	-	RN2115F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=2.2k/10k	SOT-490	18ta	-	3a	Tos
XS	-	RN2115FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=2.2k/10k	TESM	18ta	-	3a	Tos
XT	-	BZX99-C4V3	Z-diode	4.3V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XT	-	RN1116	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/10k	SOT-416	16ta	-	3a	Tos
XT	-	RN1116F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/10k	SOT-490	18ta	-	3a	Tos
XT	-	RN1116FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/10k	TESM	18ta	-	3a	Tos
XT	-	RN1116FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=4.7k/10k	SOT-723	18ta	-	3a	Tos

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XT	-	RN1316	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=4.7k/10k	SOT-323	16ta	-	3a	Tos
XT	-	RN1416	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=4.7k/10k	SOT-346	16ta	-	3a	Tos
XT	-	RN2116F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/10k	SOT-490	18ta	-	3a	Tos
XT	-	RN2116FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/10k	TESM	18ta	-	3a	Tos
XT	-	RN2116FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=4.7k/10k	SOT-723	18ta	-	3a	Tos
XT-	-	2SC4674	Si-npn	VHF/UHF, 12V, 8mA, 50mW, B=50..250, >4GHz	SOT-323	16ta	-	3a	Ren
XU	-	BZX99-C7V5	Z-diode	7.5V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XU	-	RN1117	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/4.7k	SOT-416	16ta	-	3a	Tos
XU	-	RN1117F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/4.7k	SOT-490	18ta	-	3a	Tos
XU	-	RN1117FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/4.7k	TESM	18ta	-	3a	Tos
XU	-	RN1117FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=10k/4.7k	SOT-723	18ta	-	3a	Tos
XU	-	RN1317	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=10k/4.7k	SOT-323	16ta	-	3a	Tos
XU	-	RN1417	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=10k/4.7k	SOT-346	16ta	-	3a	Tos
XU	-	RN2117F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/4.7k	SOT-490	18ta	-	3a	Tos
XU	-	RN2117FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/4.7k	TESM	18ta	-	3a	Tos
XU_	-	2SC4680	Si-npn	UHF/VHF, 12V, 50mA, 150mW, B>100	SOT-346	16ta	-	3a	Ren
XU1	-	CHDTA143XUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/10k	SOT-323	16ta	-	3a	Chm
XU2	-	CHDTA124XUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=22k/47k	SOT-323	16ta	-	3a	Chm
XUA	-	CHDTC143XUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/10k	SOT-323	16ta	-	3a	Chm
XUB	-	CHDTC124XUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=22k/47k	SOT-323	16ta	-	3a	Chm
XUs	-	BCR562	Si-pnp-Digi	Sw, 50V, 500mA, 330mW, R1/R2=4.7k/4.7k, 150MHz	SOT-23	16ta	-	3c	Inf
XV	-	BZX99-C8V2	Z-diode	8.2V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XV-	-	2SC4702	Si-npn	AF, Vid, 300/300V, 50mA, 150mW, 80MHz, B=60..150	SOT-23	16ta	-	3a	Ren
XVs	-	BCR521	Si-npn-Digi	Sw, 50V, 500mA, 330mW, R1/R2=1k/1k, 100MHz	SOT-23	16ta	-	3c	Inf
XW	-	BZX99-C9V1	Z-diode	9.1V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XW	-	CHT4124WPT	Si-npn	AF, Sw, 25V, 200mA, B=120..360, 300MHz	SOT-323	16ta	-	3a	Chm
XW	-	RN1118	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/10k	SOT-416	16ta	-	3a	Tos
XW	-	RN1118F	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/10k	SOT-490	18ta	-	3a	Tos
XW	-	RN1118FT	Si-npn-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/10k	TESM	18ta	-	3a	Tos
XW	-	RN1118FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1/R2=47k/10k	SOT-723	18ta	-	3a	Tos
XW	-	RN1318	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=47k/10k	SOT-323	16ta	-	3a	Tos
XW	-	RN1418	Si-npn-Digi	Sw, 50V, 100mA, 400mW, R1/R2=47k/10k	SOT-346	16ta	-	3a	Tos
XW	-	RN2118F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/10k	SOT-490	18ta	-	3a	Tos
XW	-	RN2118FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/10k	TESM	18ta	-	3a	Tos
XWs	-	BCR505	Si-npn-Digi	Sw, 50V, 500mA, 330mW, R1/R2=2.2k/10k, 100MHz	SOT-23	16ta	-	3c	Inf
XX	-	BZX99-C10	Z-diode	10V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XXs	-	BCR571	Si-pnp-Digi	Sw, 50V, 500mA, 330mW, R1/R2=1k/1k, 150MHz	SOT-23	16ta	-	3c	Inf
XY	-	2SD1851	Si-npn-Darl	AF-Drv, 80V, 200mA, 200mW, B>5000	SOT-23	16ta	-	3a	San
XY	-	2SK209-Y	n-FET	GP, 50V, 10mA, 150mW, Idss=1.2..3mA	SOT-23	16fa	-	3a	Tos
XY	-	2SK880-Y	n-FET	AF-Amp, 50V, 10mA, 100mW, Idss=1.2..3mA, Up<1.5V	SOT-323	16fa	-	3a	Tos
XY	-	BZX99-C11	Z-diode	11V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
XZ	-	BZX99-C12	Z-diode	12V±5%, If=300mA, 300mW	SOT-23	16dc	-	3a	Phi
y	-	AX6904DA	Vdet-IC	3.08V±1.5%, +Reset PPO	SC-70	16vda	VD7	3b	Axl
Y	cr	ELM7514NEB	Vdet-IC	1.4V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
Y	cs	ELM7514CEB	Vdet-IC	1.4V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
Y0	-	ELM7640LBB	Vdet-IC	4.0V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Y0	-	ELM9720CBB	Vdet-IC	2.0V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
Y0	-	MMBZ5221B	Z-diode	2.4V±5%, Izt=20mA, Zzt=30Ω, 350mW	SOT-23	16dc	-	3c	Jiy
Y1	-	BZX84B11	Z-diode	10.78..11.22V, Zzt=20Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Y1	-	BZX84C11	Z-diode	10.4..11.6V, Zzt=20Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Y1	-	BZX84-C11	Z-diode	10.4..11.6V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Y1	-	BZX84C11LT1	Z-diode	10.4..11.6V, Zzt=20Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y1	-	CZRT55C11	Z-diode	10.4..11.6V, Zzt=20Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Y1	-	ELM7641LBB	Vdet-IC	4.1V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Y1	-	ELM9721CBB	Vdet-IC	2.1V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
Y1	-	LBZX84C11L1	Z-diode	10.4..11.6V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y1	-	TC1273-10ENB	Vdet-IC	4.37V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Mcc
Y1	-	TC1273-15ENB	Vdet-IC	4.12V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Mcc
Y1	co	BZX84C11LT1G	Z-diode	10.4..11.6V, Zzt=20Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y10	-	BZX84B27	Z-diode	26.46..27.54V, Zzt=80Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Y10	-	BZX84C27	Z-diode	25.1..28.9V, Zzt=80Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Y10	-	BZX84-C27	Z-diode	27V±5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y10	-	BZX84C27LT1	Z-diode	25.1..28.9V, Zzt=80Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y10	-	CZRT55C27	Z-diode	25.1..28.9V, Zzt=80Ω, Izt=2mA, 350mW	SOT-23	16dc	-	3a	Cmc
Y10	-	LBZX84C27L1	Z-diode	25.1..28.9V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y10	cn	BZX84C27LT1G	Z-diode	25.1..28.9V, Zzt=80Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y11	-	BZX84B30	Z-diode	29.40..30.60V, Zzt=80Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Y11	-	BZX84C30	Z-diode	28..32V, Zzt=80Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Y11	-	BZX84-C30	Z-diode	30V±5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y11	-	BZX84C30LT1	Z-diode	28..32V, Zzt=80Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Y11	-	CZRT55C30	Z-diode	28.0..32.0V, Zzt=80Ω, Izt=2mA, 350mW	SOT-23	16dc	-	3a	Cmc
Y11	-	LBZX84C30L1	Z-diode	28..32V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y11	cn	BZX84C30LT1G	Z-diode	28..32V, Zzt=80Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y12	-	2SA1464-Y12	Si-pnp	AF, Sw, 60V, 500mA, 200mW, 400MHz, B=75..150	SOT-23-3L	16te	-	3a	Trs
Y12	-	2SA1608-12	Si-pnp	HF, Sw, 60V, 500mA, 150mW, B=75..150, 400MHz	SOT-23	16ta	-	3a	Nec
Y12	-	BZX84B33	Z-diode	32.34..33.66V, Zzt=80Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Y12	-	BZX84C33	Z-diode	31..35V, Zzt=80Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Y12	-	BZX84-C33	Z-diode	33V±5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y12	-	BZX84C33LT1	Z-diode	31..35V, Zzt=80Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y12	-	CZRT55C33	Z-diode	31.0..35.0V, Zzt=80Ω, Izt=2mA, 350mW	SOT-23	16dc	-	3a	Cmc
Y12	-	LBZX84C33L1	Z-diode	31..35V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y12	cn	BZX84C33LT1G	Z-diode	31..35V, Zzt=80Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y13	-	2SA1464-Y13	Si-pnp	AF, Sw, 60V, 500mA, 200mW, 400MHz, B=100..200	SOT-23-3L	16te	-	3a	Trs
Y13	-	2SA1608-13	Si-pnp	HF, Sw, 60V, 500mA, 150mW, B=100..200, 400MHz	SOT-23	16ta	-	3a	Nec
Y13	-	BZX84B36	Z-diode	35.28..36.72V, Zzt=90Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Y13	-	BZX84C36	Z-diode	34..38V, Zzt=90Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Y13	-	BZX84-C36	Z-diode	36V±5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y13	-	BZX84C36LT1	Z-diode	34..38V, Zzt=90Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y13	-	CZRT55C36	Z-diode	34.0..38.0V, Zzt=90Ω, Izt=2mA, 350mW	SOT-23	16dc	-	3a	Cmc
Y13	-	LBZX84C36L1	Z-diode	34..38V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y13	cn	BZX84C36LT1G	Z-diode	34..38V, Zzt=90Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y14	-	2SA1464-Y14	Si-pnp	AF, Sw, 60V, 500mA, 200mW, 400MHz, B=150..300	SOT-23-3L	16te	-	3a	Trs
Y14	-	2SA1608-14	Si-pnp	HF, Sw, 60V, 500mA, 150mW, B=150..300, 400MHz	SOT-23	16ta	-	3a	Nec
Y14	-	BZX84B39	Z-diode	38.22..39.78V, Zzt=130Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Y14	-	BZX84C39	Z-diode	37..41V, Zzt=130Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Y14	-	BZX84-C39	Z-diode	39V±5%, Zzt=130Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y14	-	BZX84C39LT1	Z-diode	37..41V, Zzt=130Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y14	-	CZRT55C39	Z-diode	37.0..41.0V, Zzt=130Ω, Izt=2mA, 350mW	SOT-23	16dc	-	3a	Cmc
Y14	-	LBZX84C39L1	Z-diode	37..41V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y14	cn	BZX84C39LT1G	Z-diode	37..41V, Zzt=130Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y15	-	BZX84C43	Z-diode	40..46V, Zzt=150Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Y15	-	BZX84-C43	Z-diode	43V±5%, Zzt=150Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y15	-	BZX84C43LT1	Z-diode	40..46V, Zzt=150Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y15	-	LBZX84C43L1	Z-diode	40..46V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y15	cn	BZX84C43LT1G	Z-diode	40..46V, Zzt=150Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y15A	-	FC6206S153M	LVR-IC	1.5V±3%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y15A	-	ML6206S153M	LVR-IC	1.5V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y16	-	BZX84C47	Z-diode	44..50V, Zzt=170Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Y16	-	BZX84-C47	Z-diode	47V±5%, Zzt=170Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y16	-	BZX84C47LT1	Z-diode	44..50V, Zzt=170Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y16	-	LBZX84C47L1	Z-diode	44..50V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y16	cn	BZX84C47LT1G	Z-diode	44..50V, Zzt=170Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y16A	-	FC6206S163M	LVR-IC	1.6V±3%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y16A	-	ML6206S163M	LVR-IC	1.6V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y17	-	BZX84-C51	Z-diode	51V±5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y17	-	BZX84C51LT1	Z-diode	48..54V, Zzt=180Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y17	-	LBZX84C51L1	Z-diode	48..54V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y17	cn	BZX84C51LT1G	Z-diode	48..54V, Zzt=180Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y17A	-	FC6206S173M	LVR-IC	1.7V±3%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y17A	-	ML6206S173M	LVR-IC	1.7V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y18	-	BZX84-C56	Z-diode	56V±5%, Zzt=135Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y18	-	BZX84C56LT1	Z-diode	52..60V, Zzt=200Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y18	cn	BZX84C56LT1G	Z-diode	52..60V, Zzt=200Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y18A	-	FC6206S183M	LVR-IC	1.8V±3%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y18A	-	ML6206S183M	LVR-IC	1.8V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y19	-	BZX84-C62	Z-diode	62V±5%, Zzt=150Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y19	-	BZX84C62LT1	Z-diode	58..66V, Zzt=215Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y19	-	LBZX84C62L1	Z-diode	58.9..65.1V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y19	cn	BZX84C62LT1G	Z-diode	58..66V, Zzt=215Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y19A	-	FC6206S193M	LVR-IC	1.9V±3%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y19A	-	ML6206S193M	LVR-IC	1.9V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y1H	-	SS8050LT1-H	Si-npn	GP, 40V, 1.5A, 625mW, B=200..350, >100MHz	SOT-23	16ta	-	3a	Wtr
Y1L	-	SS8050LT1-L	Si-npn	GP, 40V, 1.5A, 625mW, B=120..200, >100MHz	SOT-23	16ta	-	3a	Wtr
Y1p	-	BZX84-C11	Z-diode	11V±5%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Y1t	-	BZX84-C11	Z-diode	11V±5%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Y1W	-	BZX84-C11	Z-diode	11V±5%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Y1Y	-	CMSZDA11V	Z-diode	Dual, 10.4..11.6V, Zzt=20Ω, 15mA, 275mW	SOT-323	16df	-	3a	Cen
Y2	-	APX809-46SR	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Di
Y2	-	BZX84B12	Z-diode	11.76..12.24V, Zzt=25Ω Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Y2	-	BZX84C12	Z-diode	11.4..12.7V, Zzt=25Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Y2	-	BZX84-C12	Z-diode	11.4..12.7V, Zzt=25Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Y2	-	BZX84C12LT1	Z-diode	11.4..12.7V, Zzt=25Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y2	-	CZRT55C12	Z-diode	11.4..12.7V, Zzt=25Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Y2	-	ELM7642LBB	Vdet-IC	4.2V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Y2	-	ELM9722CBB	Vdet-IC	2.2V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
Y2	-	LBZX84C12L1	Z-diode	11.4..12.7V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y2	-	NTE5021SM	Z-diode	12V±5%, If=250mA, 300mW	SOT-23	16dc	-	3a	Nte
Y2	-	RN2130F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=100k/100k	SOT-490	18ta	-	3a	Tos
Y2	co	BZX84C12LT1G	Z-diode	11.4..12.7V, Zzt=25Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y20	-	BZX84-C68	Z-diode	68V±5%, Zzt=200Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y20	-	BZX84C68LT1	Z-diode	64..72V, Zzt=240Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y20	cn	BZX84C68LT1G	Z-diode	64..72V, Zzt=240Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y20A	-	FC6206S202M	LVR-IC	2.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y20A	-	ML6206S202M	LVR-IC	2.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y21	-	BZX84-C75	Z-diode	75V±5%, Zzt=250Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y21	-	BZX84C75LT1	Z-diode	70.79V, Zzt=255Ω, Izt=2mA, 225mW	SOT-23	16dc	-	3b	Ons
Y21	-	LBZX84C75L1	Z-diode	71.25..78.75V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y21	cn	BZX84C75LT1G	Z-diode	70.79V, Zzt=255Ω, Izt=2mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y21A	-	FC6206S212M	LVR-IC	2.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y21A	-	ML6206S212M	LVR-IC	2.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y22	-	2SA1461-22	Si-pnp	Sw, 40V, 200mA, 200mW, B=75..150, >200MHz	SOT-23	16ta	-	3a	Nec
Y22A	-	FC6206S222M	LVR-IC	2.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y22A	-	ML6206S222M	LVR-IC	2.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y23	-	2SA1461-23	Si-pnp	Sw, 40V, 200mA, 200mW, B=100..200, >200MHz	SOT-23	16ta	-	3a	Nec
Y23A	-	FC6206S232M	LVR-IC	2.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y23A	-	ML6206S232M	LVR-IC	2.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y24	-	2SA1461-24	Si-pnp	Sw, 40V, 200mA, 200mW, B=150..300, >200MHz	SOT-23	16ta	-	3a	Nec
Y24A	-	FC6206S242M	LVR-IC	2.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y24A	-	ML6206S242M	LVR-IC	2.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y25	-	NTM3906	Si-pnp	GP, 40V, 200mA, 330mW, B=100..300, >250MHz	SOT-23	16ta	-	3a	Nec
Y25A	-	FC6206S252M	LVR-IC	2.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y25A	-	ML6206S252M	LVR-IC	2.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y26A	-	FC6206S262M	LVR-IC	2.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y26A	-	ML6206S262M	LVR-IC	2.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y27A	-	FC6206S272M	LVR-IC	2.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y27A	-	ML6206S272M	LVR-IC	2.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y28A	-	FC6206S282M	LVR-IC	2.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y28A	-	ML6206S282M	LVR-IC	2.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y29A	-	FC6206S292M	LVR-IC	2.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y29A	-	ML6206S292M	LVR-IC	2.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y2H	-	SS8550LT1-H	Si-pnp	GP, 40V, 1.5A, 625mW, B=200..350, >100MHz	SOT-23	16ta	-	3a	Wtr
Y2L	-	SS8550LT1-L	Si-pnp	GP, 40V, 1.5A, 625mW, B=120..200, >100MHz	SOT-23	16ta	-	3a	Wtr
Y2p	-	BZX84-C12	Z-diode	12V±5%, Zzt=25Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Y2t	-	BZX84-C12	Z-diode	12V±5%, Zzt=25Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Y2W	-	BZX84-C12	Z-diode	12V±5%, Zzt=25Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Y2Y	-	CMSZDA12V	Z-diode	Dual, 11.4..12.7V, Zzt=25Ω, 13mA, 275mW	SOT-323	16df	-	3a	Cen
Y3	-	APX809-44SR	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Di
Y3	-	BZX84B13	Z-diode	12.74..13.26V, Zzt=30Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Y3	-	BZX84C13	Z-diode	12.4..14.1V, Zzt=30Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Y3	-	BZX84-C13	Z-diode	12.4..14.1V, Zzt=30Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Y3	-	BZX84C13LT1	Z-diode	12.4..14.1V, Zzt=30Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y3	-	BZX88-C13	Z-diode	13V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
Y3	-	CZRT55C13	Z-diode	12.4..14.1V, Zzt=30Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Y3	-	ELM7643LBB	Vdet-IC	4.3V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Y3	-	ELM9723CBB	Vdet-IC	2.3V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
Y3	-	LBZX84C13L1	Z-diode	12.4..14.1V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y3	-	RN2131F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1=100k	SOT-490	18ta	-	3a	Tos
Y3	-	TC1273-5ENB	Vdet-IC	4.62V±1%, -Reset ODO	SOT-23	16vdb	VD6	3d	Mcc
Y3	co	BZX84C13LT1G	Z-diode	12.4..14.1V, Zzt=30Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y30A	-	FC6206S302M	LVR-IC	3.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y30A	-	ML6206S302M	LVR-IC	3.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y31A	-	FC6206S312M	LVR-IC	3.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y31A	-	ML6206S312M	LVR-IC	3.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y32A	-	FC6206S322M	LVR-IC	3.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y32A	-	ML6206S322M	LVR-IC	3.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y33	-	2SA1462-33	Si-pnp	Sw, 15V, 50mA, 200mW, B=50..100, >800MHz	SOT-23	16ta	-	3a	Nec
Y33	-	2SA1610-33	Si-pnp	Sw, 15V, 50mA, 150mW, B=50..100, 1.8GHz, 20/40ns	SOT-23	16ta	-	3a	Nec
Y33A	-	FC6206S332M	LVR-IC	3.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y33A	-	ML6206S332M	LVR-IC	3.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y34	-	2SA1462-34	Si-pnp	Sw, 15V, 50mA, 200mW, B=75..150, >800MHz	SOT-23	16ta	-	3a	Nec

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Y34	-	2SA1610-34	Si-pnp	Sw, 15V, 50mA, 150mW, B=75..150, 1.8GHz, 20/40ns	SOT-23	16ta	-	3a	Nec
Y34A	-	FC6206S342M	LVR-IC	3.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y34A	-	ML6206S342M	LVR-IC	3.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y35A	-	FC6206S352M	LVR-IC	3.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y35A	-	ML6206S352M	LVR-IC	3.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y36A	-	FC6206S362M	LVR-IC	3.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y36A	-	ML6206S362M	LVR-IC	3.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y37A	-	FC6206S372M	LVR-IC	3.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y37A	-	ML6206S372M	LVR-IC	3.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y38A	-	FC6206S382M	LVR-IC	3.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y38A	-	ML6206S382M	LVR-IC	3.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y39A	-	FC6206S392M	LVR-IC	3.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y39A	-	ML6206S392M	LVR-IC	3.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y3p	-	BZX84-C13	Z-diode	13V±5%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Y3t	-	BZX84-C13	Z-diode	13V±5%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Y3W	-	BZX84-C13	Z-diode	13V±5%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Y3Y	-	CMSZDA13V	Z-diode	Dual, 12.4..14.1V, Zzt=30Ω, 12mA, 275mW	SOT-323	16df	-	3a	Cen
Y4	-	APX809-40SR	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Di
Y4	-	BZX84B15	Z-diode	14.70..15.30V, Zzt=30Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Y4	-	BZX84C15	Z-diode	13.8..15.6V, Zzt=30Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Y4	-	BZX84-C15	Z-diode	13.8..15.6V, Zzt=30Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Y4	-	BZX84C15LT1	Z-diode	13.8..15.6V, Zzt=30Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y4	-	BZX88-C15	Z-diode	15V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
Y4	-	CZRT55C15	Z-diode	13.8..15.6V, Zzt=30Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Y4	-	ELM7644LBB	Vdet-IC	4.4V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Y4	-	ELM9724CBB	Vdet-IC	2.4V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
Y4	-	KA4A4Z	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=10k	SOT-416	16ta	-	3a	Nec
Y4	-	LBZX84C15L1	Z-diode	13.8..15.6V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y4	-	NTE5024SM	Z-diode	15V±5%, If=250mA, 300mW	SOT-23	16dc	-	3a	Nte
Y4	-	RN2132F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1=200k	SOT-490	18ta	-	3a	Tos
Y4	-	SP809NEK-3-1	Vdet-IC	3.1V±1.5%, -Reset ODO	SOT-23	16vdc	VD6	3b	Sip
Y4	co	BZX84C15LT1G	Z-diode	13.8..15.6V, Zzt=30Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y40A	-	FC6206S402M	LVR-IC	4.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y40A	-	ML6206S402M	LVR-IC	4.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y41A	-	FC6206S412M	LVR-IC	4.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y41A	-	ML6206S412M	LVR-IC	4.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y42A	-	FC6206S422M	LVR-IC	4.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y42A	-	ML6206S422M	LVR-IC	4.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y43A	-	FC6206S432M	LVR-IC	4.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y43A	-	ML6206S432M	LVR-IC	4.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y44A	-	FC6206S442M	LVR-IC	4.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y44A	-	ML6206S442M	LVR-IC	4.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y45	-	BZX84-A27	Z-diode	27V±1%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y45A	-	FC6206S452M	LVR-IC	4.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y45A	-	ML6206S452M	LVR-IC	4.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y46	-	BZX84-A30	Z-diode	30V±1%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y46A	-	FC6206S462M	LVR-IC	4.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y46A	-	ML6206S462M	LVR-IC	4.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y47A	-	FC6206S472M	LVR-IC	4.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y47A	-	ML6206S472M	LVR-IC	4.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y48A	-	FC6206S482M	LVR-IC	4.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y48A	-	ML6206S482M	LVR-IC	4.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y49A	-	FC6206S492M	LVR-IC	4.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y49A	-	ML6206S492M	LVR-IC	4.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y4p	-	BZX84-C15	Z-diode	15V±5%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Y4t	-	BZX84-C15	Z-diode	15V±5%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Y4W	-	BZX84-C15	Z-diode	15V±5%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Y4Y	-	CMSZDA15V	Z-diode	Dual, 13.8..15.6V, Zzt=30Ω, 11mA, 275mW	SOT-323	16df	-	3a	Cen
Y5	-	APX809-31SR	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Di
Y5	-	BZX84B16	Z-diode	15.68..16.32V, Zzt=40Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Y5	-	BZX84C16	Z-diode	15.3..17.1V, Zzt=40Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Y5	-	BZX84-C16	Z-diode	15.3..17.1V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Y5	-	BZX84C16LT1	Z-diode	15.3..17.1V, Zzt=40Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y5	-	BZX88-C16	Z-diode	16V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
Y5	-	CZRT55C16	Z-diode	15.3..17.1V, Zzt=40Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Y5	-	ELM7645LBB	Vdet-IC	4.5V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Y5	-	ELM9725CBB	Vdet-IC	2.5V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
Y5	-	LBZX84C16L1	Z-diode	15.3..17.1V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y5	co	BZX84C16LT1G	Z-diode	15.3..17.1V, Zzt=40Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y50	-	BZX84-A2V4	Z-diode	2.4V±1%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Y50A	-	FC6206S502M	LVR-IC	5.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Fis
Y50A	-	ML6206S502M	LVR-IC	5.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Y51	-	BZX84-A2V7	Z-diode	2.7V±1%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y52	-	BZX84-A3V0	Z-diode	3.0V±1%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y53	-	BZX84-A3V3	Z-diode	3.3V±1%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y54	-	BZX84-A3V6	Z-diode	3.6V±1%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y55	-	BZX84-A3V9	Z-diode	3.9V±1%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y56	-	BZX84-A4V3	Z-diode	4.3V±1%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y57	-	BZX84-A4V7	Z-diode	4.7V±1%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y58	-	BZX84-A5V1	Z-diode	5.1V±1%, Zzt=60Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y59	-	BZX84-A5V6	Z-diode	5.6V±1%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y5p	-	BZX84-C16	Z-diode	16V±5%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Y5t	-	BZX84-C16	Z-diode	16V±5%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Y5W	-	BZX84-C16	Z-diode	16V±5%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Y5Y	-	CMSZDA16V	Z-diode	Dual, 15.3..17.1V, Zzt=40Ω, 10mA, 275mW	SOT-323	16df	-	3a	Cen
Y6	-	APX809-29SR	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Di
Y6	-	BZX84B18	Z-diode	17.64..18.36V, Zzt=45Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Y6	-	BZX84C18	Z-diode	16.8..19.1V, Zzt=45Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Y6	-	BZX84-C18	Z-diode	16.8..19.1V, Zzt=45Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Y6	-	BZX84C18LT1	Z-diode	16.8..19.1V, Zzt=45Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y6	-	BZX88-C18	Z-diode	18V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
Y6	-	CZRT55C18	Z-diode	16.8..19.1V, Zzt=45Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Y6	-	ELM7646LBB	Vdet-IC	4.6V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Y6	-	ELM9726CBB	Vdet-IC	2.6V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
Y6	-	LBZX84C18L1	Z-diode	16.8..19.1V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y6	-	NTE5027SM	Z-diode	18V±5%, If=250mA, 300mW	SOT-23	16dc	-	3a	Nte
Y6	co	BZX84C18LT1G	Z-diode	16.8..19.1V, Zzt=45Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y60	-	BZX84-A6V2	Z-diode	6.2V±1%, Zzt=10Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y61	-	BZX84-A6V8	Z-diode	6.8V±1%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y62	-	BZX84-A7V5	Z-diode	7.5V±1%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y63	-	BZX84-A8V2	Z-diode	8.2V±1%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y64	-	BZX84-A9V1	Z-diode	9.1V±1%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y65	-	BZX84-A10	Z-diode	10V±1%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y66	-	BZX84-A11	Z-diode	11V±1%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y67	-	BZX84-A12	Z-diode	12V±1%, Zzt=25Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y68	-	BZX84-A13	Z-diode	13V±1%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y69	-	BZX84-A15	Z-diode	15V±1%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y6p	-	BZX84-C18	Z-diode	18V±5%, Zzt=45Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Y6t	-	BZX84-C18	Z-diode	18V±5%, Zzt=45Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Y6W	-	BZX84-C18	Z-diode	18V±5%, Zzt=45Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Y6Y	-	CMSZDA18V	Z-diode	Dual, 16.8..19.1V, Zzt=45Ω, 9.2mA, 275mW	SOT-323	16df	-	3a	Cen
Y7	-	APX809-26SR	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Di
Y7	-	BZX84B20	Z-diode	19.60..20.40V, Zzt=55Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Y7	-	BZX84C20	Z-diode	18.8..21.2V, Zzt=55Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Y7	-	BZX84-C20	Z-diode	18.8..21.2V, Zzt=55Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Y7	-	BZX84C20LT1	Z-diode	18.8..21.2V, Zzt=55Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y7	-	BZX88-C20	Z-diode	20V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
Y7	-	CZRT55C20	Z-diode	18.8..21.2V, Zzt=55Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Y7	-	ELM7647LBB	Vdet-IC	4.7V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Y7	-	ELM9727CBB	Vdet-IC	2.7V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
Y7	-	KN4A4Z	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1=10k	SOT-416	16ta	-	3a	Nec
Y7	-	LBZX84C20L1	Z-diode	18.8..21.2V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y7	co	BZX84C20LT1G	Z-diode	18.8..21.2V, Zzt=55Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y70	-	BZX84-A16	Z-diode	16V±1%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y71	-	BZX84-A18	Z-diode	18V±1%, Zzt=45Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y72	-	BZX84-A20	Z-diode	20V±1%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y73	-	BZX84-A22	Z-diode	22V±1%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y74	-	BZX84-A24	Z-diode	24V±1%, Zzt=70Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y77	-	BZX84-A33	Z-diode	33V±1%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y78	-	BZX84-A36	Z-diode	36V±1%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y79	-	BZX84-A39	Z-diode	39V±1%, Zzt=130Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y7p	-	BZX84-C20	Z-diode	20V±5%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Y7t	-	BZX84-C20	Z-diode	20V±5%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Y7W	-	BZX84-C20	Z-diode	20V±5%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Y7Y	-	CMSZDA20V	Z-diode	Dual, 18.8..21.2V, Zzt=55Ω, 8.3mA, 275mW	SOT-323	16df	-	3a	Cen
Y8	-	APX809-23SR	Vdet-IC	2.25V±1.5%, -Reset PPO	SOT-23	16vdb	VD7	3b	Di
Y8	-	BZX84B22	Z-diode	21.56..22.44V, Zzt=55Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Y8	-	BZX84C22	Z-diode	20.8..23.3V, Zzt=55Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Y8	-	BZX84-C22	Z-diode	20.8..23.3V, Zzt=55Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Y8	-	BZX84C22LT1	Z-diode	20.8..23.3V, Zzt=55Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Y8	-	BZX84C7V5	Z-diode	7.0..7.9V, Zzt=15Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
Y8	-	BZX88-C22	Z-diode	22V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
Y8	-	CZRT55C22	Z-diode	20.8..23.3V, Zzt=55Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Y8	-	ELM7648LBB	Vdet-IC	4.8V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Y8	-	ELM9728CBB	Vdet-IC	2.8V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
Y8	-	LBZX84C22L1	Z-diode	20.8..23.3V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y8	co	BZX84C22LT1G	Z-diode	20.8..23.3V, Zzt=55Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y80	-	BZX84-A43	Z-diode	43V±1%, Zzt=150Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y81	-	BZX84-A47	Z-diode	47V±1%, Zzt=170Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y82	-	BZX84-A51	Z-diode	51V±1%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y83	-	BZX84-A56	Z-diode	56V±1%, Zzt=135Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y84	-	BZX84-A62	Z-diode	62V±1%, Zzt=150Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y85	-	BZX84-A68	Z-diode	68V±1%, Zzt=200Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y86	-	BZX84-A75	Z-diode	75V±1%, Zzt=250Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Y8p	-	BZX84-C22	Z-diode	22V±5%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Y8t	-	BZX84-C22	Z-diode	22V±5%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Y8W	-	BZX84-C22	Z-diode	22V±5%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Y8Y	-	CMSZDA22V	Z-diode	Dual, 20.8..23.3V, Zzt=55Ω, 7.6mA, 275mW	SOT-323	16df	-	3a	Cen
Y9	-	BZX84B24	Z-diode	23.52..24.48V, Zzt=70Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Y9	-	BZX84C24	Z-diode	22.8..25.6V, Zzt=70Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Y9	-	BZX84-C24	Z-diode	22.8..25.6V, Zzt=70Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Y9	-	BZX84C24LT1	Z-diode	22.8..25.6V, Zzt=70Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Y9	-	BZX84C36	Z-diode	34..38V, Zzt=90Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
Y9	-	BZX88-C24	Z-diode	24V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
Y9	-	CZRT55C24	Z-diode	22.8..25.6V, Zzt=70Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Y9	-	ELM7649LBB	Vdet-IC	4.9V±2%, -Reset PPO, 500ms	SOT-23	16vdc	VD7	3d	Elm
Y9	-	ELM9729CBB	Vdet-IC	2.9V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
Y9	-	LBZX84C24L1	Z-diode	22.8..25.6V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Y9	-	NTE5031SM	Z-diode	24V±5%, If=250mA, 300mW	SOT-23	16dc	-	3a	Nte
Y9	co	BZX84C24LT1G	Z-diode	22.8..25.6V, Zzt=70Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Y9p	-	BZX84-C24	Z-diode	24V±5%, Zzt=70Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Y9t	-	BZX84-C24	Z-diode	24V±5%, Zzt=70Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Y9W	-	BZX84-C24	Z-diode	24V±5%, Zzt=70Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Y9Y	-	CMSZDA24V	Z-diode	Dual, 22.8..25.6V, Zzt=70Ω, 7.0mA, 275mW	SOT-323	16df	-	3a	Cen
YA	-	3LN01C	n-MOSFET	Sw, U-Hi-Sp, 30V, 150mA, 250mW, 19/155ns, 3.7Ω (50mA)	SOT-23	16fh	-	3a	San
YA	-	3LN01M	n-MOSFET	Sw, U-Hi-Sp, 30V, 150mA, 150mW, 19/155ns, 3.7Ω (50mA)	MCP	16fh	-	3a	San
YA	-	3LN01S	n-MOSFET	Sw, U-Hi-Sp, 30V, 150mA, 150mW, 19/155ns, 3.7Ω (50mA)	SMCP	16fh	-	3a	San
YA	-	3LN01SS	n-MOSFET	Sw, U-Hi-Sp, 30V, 150mA, 150mW, 19/155ns, 3.7Ω (50mA)	SSFP	18fh	-	3a	San
YA	-	APX810-46SR	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Di
YA	-	RN1119FV	Si-npn-Digi	Sw, 50V, 100mA, 150mW, R1=1k	SOT-723	18ta	-	3a	Tos
YA	-	RN2101	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/4.7k	SOT-416	16ta	-	3a	Tos
YA	-	RN2101F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/4.7k	SOT-490	18ta	-	3a	Tos
YA	-	RN2101FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/4.7k	TESM	18ta	-	3a	Tos
YA	-	RN2101FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=4.7k/4.7k	SOT-723	18ta	-	3a	Tos
YA	-	RN2119FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1=1k	SOT-723	18ta	-	3a	Tos
YA	-	RN2301	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=4.7k/4.7k	SOT-346	16ta	-	3a	Tos
YA	-	RN2401	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=4.7k/4.7k	SOT-346	16ta	-	3a	Tos
YA-	-	2SC4784	Si-npn	VHF/UHF, 15V, 20mA, 100mW, 10GHz, B=50..250	SOT-323	16ta	-	3a	Ren
YA-	-	2SC5049	Si-npn	VHF/UHF, LN, 15V, 20mA, 150mW, B=50..250, 10GHz	SC-59A	16ta	-	3a	Ren
YA-	-	2SC5137	Si-npn	VHF/UHF, 15V, 20mA, 80mW, B=50..250, 10GHz	SMPAK	16ta	-	3a	Ren
YAs	-	BSS83P	p-MOSFET	V-MOS, LogL, 60V, 330mA, <3Ω	SOT-23	16fh	-	3a	Sie
YB	-	5LN01C	n-MOSFET	Sw, U-Hi-Sp, 50V, 100mA, 250mW, 25/350ns	SOT-23	16fh	-	3a	San
YB	-	5LN01M	n-MOSFET	Sw, U-Hi-Sp, 50V, 100mA, 150mW, 25/350ns	MCP	16fh	-	3a	San
YB	-	5LN01S	n-MOSFET	Sw, U-Hi-Sp, 50V, 100mA, 150mW, 25/350ns	SMCP	16fh	-	3a	San
YB	-	5LN01SS	n-MOSFET	Sw, U-Hi-Sp, 50V, 100mA, 150mW, 25/350ns	SSFP	18fh	-	3a	San
YB	-	APX810-44SR	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Di
YB	-	CZMK13	Z-diode	Dual, 13V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
YB	-	RN2102	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/10k	SOT-416	16ta	-	3a	Tos
YB	-	RN2102F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/10k	SOT-490	18ta	-	3a	Tos
YB	-	RN2102FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/10k	TESM	18ta	-	3a	Tos
YB	-	RN2102FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=10k/10k	SOT-723	18ta	-	3a	Tos
YB	-	RN2302	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=10k/10k	SOT-346	16ta	-	3a	Tos
YB	-	RN2402	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=10k/10k	SOT-346	16ta	-	3a	Tos
YB	-	TZT13CW	Z-diode	Dual, 12.4..14.1V, Izt=5mA, Zzt=30Ω, 300mW	SOT-23	16dg	-	3a	Ttr
YBs	-	BSS84P	p-MOSFET	V-MOS, LogL, 60V, 130mA, 250mW, <10Ω(130mA), 3/7ns	SOT-23	16fh	-	3c	Inf
YBs	-	BSS84PW	p-MOSFET	V-MOS, LogL, 60V, 130mA, 250mW, <10Ω(130mA), 3/7ns	SOT-23	16fh	-	3c	Inf
YC	-	5HN01C	n-MOSFET	Sw, U-Hi-Sp, 50V, 100mA, 250mW, 10/105ns, 5.8Ω (50mA)	SOT-23	16fh	-	3a	San
YC	-	5HN01M	n-MOSFET	Sw, U-Hi-Sp, 50V, 100mA, 150mW, 10/105ns, 5.8Ω (50mA)	MCP	16fh	-	3a	San
YC	-	5HN01S	n-MOSFET	Sw, U-Hi-Sp, 50V, 100mA, 150mW, 10/105ns, 5.8Ω (50mA)	SMCP	16fh	-	3a	San
YC	-	5HN01SS	n-MOSFET	Sw, U-Hi-Sp, 50V, 100mA, 150mW, 10/105ns, 5.8Ω (50mA)	SMCP	18fh	-	3a	San

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
YC	-	APX810-40SR	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Di
YC	-	CHT847BTPT-R	Si-npn	AF, Sw, 45V, 100mA, B=200..450, 200MHz	SOT-416	16ta	-	3a	Chm
YC	-	CZMK15	Z-diode	Dual, 15V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
YC	-	RN2103	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=22k/22k	SOT-416	16ta	-	3a	Tos
YC	-	RN2103F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=22k/22k	SOT-490	18ta	-	3a	Tos
YC	-	RN2103FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=22k/22k	TESM	18ta	-	3a	Tos
YC	-	RN2103FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=22k/22k	SOT-723	18ta	-	3a	Tos
YC	-	RN2303	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=22k/22k	SOT-346	16ta	-	3a	Tos
YC	-	RN2403	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=22k/22k	SOT-346	16ta	-	3a	Tos
YC	-	TZT15CW	Z-diode	Dual, 13.8..15.6V, Izt=5mA, Zzt=30Ω, 300mW	SOT-23	16dg	-	3a	Ttr
YC-	-	2SC5998	Si-npn	UHF/VHFamp, 13V, 500mA, 700mW, 11GHz, B=110..190	MPAK	16tb	-	3a	Ren
YD	-	APX810-31SR	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Di
YD	-	CZMK16	Z-diode	Dual, 16V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
YD	-	RN2104	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/47k	SOT-416	16ta	-	3a	Tos
YD	-	RN2104F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/47k	SOT-490	18ta	-	3a	Tos
YD	-	RN2104FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/47k	TESM	18ta	-	3a	Tos
YD	-	RN2104FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=47k/47k	SOT-723	18ta	-	3a	Tos
YD	-	RN2304	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=47k/47k	SOT-346	16ta	-	3a	Tos
YD	-	RN2404	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=47k/47k	SOT-346	16ta	-	3a	Tos
YD	-	TZT16CW	Z-diode	Dual, 15.3..17.1V, Izt=5mA, Zzt=40Ω, 300mW	SOT-23	16dg	-	3a	Ttr
YD2V	-	LSP2132ST23X440	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YD3V	-	LSP2132ST23X450	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YD4V	-	LSP2132ST23X460	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YD5V	-	LSP2132ST23X470	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YD6V	-	LSP2132ST23X470	LVR-IC	LDO, 4.75V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YD7V	-	LSP2132ST23X480	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YD8V	-	LSP2132ST23X490	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YD9V	-	LSP2132ST23X500	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDaV	-	LSP2132ST23X380	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDAV	-	LSP2132ST23X120	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDAV	-	YB1253ST23X120	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDbV	-	LSP2132ST23X390	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDBV	-	LSP2132ST23X130	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDBV	-	YB1253ST23X130	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDCV	-	LSP2132ST23X140	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDCV	-	YB1253ST23X140	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDdV	-	LSP2132ST23X400	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDDV	-	LSP2132ST23X150	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDDV	-	YB1253ST23X150	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDeV	-	LSP2132ST23X410	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDEV	-	LSP2132ST23X160	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDEV	-	YB1253ST23X160	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDfV	-	LSP2132ST23X420	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDFV	-	LSP2132ST23X170	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDFV	-	YB1253ST23X170	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDgV	-	LSP2132ST23X430	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDGV	-	LSP2132ST23X180	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDGV	-	YB1253ST23X180	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDHV	-	LSP2132ST23X190	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDHV	-	YB1253ST23X190	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDIV	-	LSP2132ST23X200	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDIV	-	YB1253ST23X200	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDJV	-	LSP2132ST23X210	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDJV	-	YB1253ST23X210	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDKV	-	LSP2132ST23X220	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDKV	-	YB1253ST23X220	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDLV	-	LSP2132ST23X230	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDLV	-	YB1253ST23X230	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDMV	-	LSP2132ST23X240	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDMV	-	YB1253ST23X240	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDNV	-	LSP2132ST23X250	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDNV	-	YB1253ST23X250	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDOV	-	LSP2132ST23X260	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDOV	-	YB1253ST23X260	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDPV	-	LSP2132ST23X270	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDPV	-	YB1253ST23X270	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDQV	-	LSP2132ST23X280	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDQV	-	YB1253ST23X280	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDRV	-	LSP2132ST23X290	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDRV	-	YB1253ST23X290	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
YDSV	-	LSP2132ST23X300	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDSV	-	YB1253ST23X300	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDTV	-	LSP2132ST23X310	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDTV	-	YB1253ST23X310	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDUV	-	LSP2132ST23X320	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDUV	-	YB1253ST23X320	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDVV	-	LSP2132ST23X330	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDVV	-	YB1253ST23X330	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDWV	-	LSP2132ST23X340	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDWV	-	YB1253ST23X340	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDXV	-	LSP2132ST23X350	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDXV	-	YB1253ST23X350	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDYV	-	LSP2132ST23X360	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YDYV	-	YB1253ST23X360	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23	16cg	VR1	3a	Ybn
YDZV	-	LSP2132ST23X370	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23	16cg	VR1	3a	Jbs
YE	-	5LN02C	n-MOSFET	Sw, U-Hi-Sp, 50V, 200mA, 250mW, 25/350ns	SOT-23	16fh	-	3a	San
YE	-	5LN02M	n-MOSFET	Sw, U-Hi-Sp, 50V, 200mA, 150mW, 25/350ns	MCP	16fh	-	3a	San
YE	-	APX810-29SR	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Di
YE	-	CZMK18	Z-diode	Dual, 18V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
YE	-	RN2105	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=2.2k/47k	SOT-416	16ta	-	3a	Tos
YE	-	RN2105F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=2.2k/47k	SOT-490	18ta	-	3a	Tos
YE	-	RN2105FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=2.2k/47k	TESM	18ta	-	3a	Tos
YE	-	RN2105FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=2.2k/47k	SOT-723	18ta	-	3a	Tos
YE	-	RN2305	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=2.2k/47k	SOT-346	16ta	-	3a	Tos
YE	-	RN2405	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=2.2k/47k	SOT-346	16ta	-	3a	Tos
YE	-	TZT18CW	Z-diode	Dual, 16.8..19.1V, Izt=5mA, Zzt=45Ω, 300mW	SOT-23	16dg	-	3a	Ttr
YE1	-	CHDTA123YEPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/10k	SOT-416	16ta	-	3a	Chm
YE2	-	CHDTA114YEPT	Si-pnp-Digi	Sw, 50V, 70mA, 250MHz, R1/R2=10/47k	SOT-416	16ta	-	3a	Chm
YEA	-	CHDTC123YEPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/10k	SOT-416	16ta	-	3a	Chm
YF	-	APX810-26SR	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Di
YF	-	CZMK20	Z-diode	Dual, 20V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
YF	-	RN2106	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/47k	SOT-416	16ta	-	3a	Tos
YF	-	RN2106F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/47k	SOT-490	18ta	-	3a	Tos
YF	-	RN2106FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/47k	TESM	18ta	-	3a	Tos
YF	-	RN2106FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=4.7k/47k	SOT-723	18ta	-	3a	Tos
YF	-	RN2306	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=4.7k/47k	SOT-346	16ta	-	3a	Tos
YF	-	RN2406	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=4.7k/47k	SOT-346	16ta	-	3a	Tos
YF	-	TZT20CW	Z-diode	Dual, 18.8..21.2V, Izt=5mA, Zzt=55Ω, 300mW	SOT-23	16dg	-	3a	Ttr
YFB	-	2SC4932-B	Si-npn	AF, GP, 20V, 500mA, 150mW, B=135..270, 300MHz	SOT-323	16ta	-	3a	Ren
YFC	-	2SC4932-C	Si-npn	AF, GP, 20V, 500mA, 150mW, B=200..400, 300MHz	SOT-323	16ta	-	3a	Ren
YFD	-	2SC4932-D	Si-npn	AF, GP, 20V, 500mA, 150mW, B=300..600, 300MHz	SOT-323	16ta	-	3a	Ren
YG	-	2SK210-GR	n-FET	VHF-FM, 18V, 10mA, 100mW, Idss=6..14mA, Nf=1.8dB	SC-59	16fk	-	3a	Tos
YG	-	APX810-23SR	Vdet-IC	2.25V±1.5%, +Reset PPO	SOT-23	16vdb	VD7	3b	Di
YG	-	BCX71RG	Si-pnp	GP, 45V, 100mA, 330mW, B= 120..220, 250MHz	SOT-23	16ta	-	3a	Sil
YG	-	CZMK22	Z-diode	Dual, 22V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
YG	-	TZT22CW	Z-diode	Dual, 20.8..23.3V, Izt=5mA, Zzt=55Ω, 300mW	SOT-23	16dg	-	3a	Ttr
YH	-	BCX71RH	Si-pnp	GP, 45V, 200mA, 250mW, B=180..310, >100MHz	SOT-23	16ta	-	3a	Sil
YH	-	CZMK24	Z-diode	Dual, 24V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
YH	-	RN2107	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/47k	SOT-416	16ta	-	3a	Tos
YH	-	RN2107F	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/47k	SOT-490	18ta	-	3a	Tos
YH	-	RN2307	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=10k/47k	SOT-346	16ta	-	3a	Tos
YH	-	RN2407	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=10k/47k	SOT-346	16ta	-	3a	Tos
YH	-	TZT24CW	Z-diode	Dual, 22.8..25.6V, Izt=5mA, Zzt=70Ω, 300mW	SOT-23	16dg	-	3a	Ttr
YH-	-	2SC4899	Si-npn	VHF/UHF, 15V, 20mA, 100mW, 9GHz, B=50..250	SOT-323	16ta	-	3a	Ren
YH-	-	2SC5140	Si-npn	VHF/UHF, 15V, 20mA, 80mW, B=50..250, 9GHz	SOT-23	16ta	-	3a	Ren
YI	-	RN2108	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=22k/47k	SOT-416	16ta	-	3a	Tos
YI	-	RN2308	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=22k/47k	SOT-346	16ta	-	3a	Tos
YI	-	RN2408	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=22k/47k	SOT-346	16ta	-	3a	Tos
YI-	-	2SA1666	Si-pnp	HF/Sw, 20V, 200mA, 35/70ns	SOT-23	16ta	-	3a	Ren
YJ	-	BCX71RJ	Si-pnp	GP, Sw, 45V, 100mA, 250mW, B=250..460, >100MHz	SOT-23	16ta	-	3a	Sil
YJ	-	CZMK27	Z-diode	Dual, 27V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
YJ	-	RN2109	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/22k	SOT-416	16ta	-	3a	Tos
YJ	-	RN2309	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=47k/22k	SOT-346	16ta	-	3a	Tos
YJ	-	RN2409	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=47k/22k	SOT-346	16ta	-	3a	Tos
YJ	-	TZT27CW	Z-diode	Dual, 25.1..28.9V, Izt=2mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3a	Ttr
YJ5	-	2SK2394-5	n-FET	LN, HF, 15V, 50mA, 200mW, Idss=6..12mA	CP	16fa	-	3a	San
YJ6	-	2SK2394-6	n-FET	LN, HF, 15V, 50mA, 200mW, Idss=10..20mA	CP	16fa	-	3a	San
YJ7	-	2SK2394-7	n-FET	LN, HF, 15V, 50mA, 200mW, Idss=16..32mA	CP	16fa	-	3a	San
YK	-	15C02S	Si-npn	AF, GP, 20V, 800mA, 200mW, B=300..600, 440MHz	SMCP	16ta	-	3a	San
YK	-	15C02SS	Si-npn	AF, GP, 20V, 800mA, 200mW, B=300..600, 440MHz	SSFP	18ta	-	3a	San

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
YK	-	BCX71RK	Si-pnp	GP, Sw, 45V, 100mA, 250mW, B=380..630, >100MHz	SOT-23	16ta	-	3a	Sil
YK	-	CZMK30	Z-diode	Dual, 30V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
YK	-	RN2110	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1=4.7k	SOT-416	16ta	-	3a	Tos
YK	-	RN2110FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1=4.7k	TESM	18ta	-	3a	Tos
YK	-	RN2310	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1=4.7k	SOT-346	16ta	-	3a	Tos
YK	-	RN2410	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1=4.7k	SOT-346	16ta	-	3a	Tos
YK	-	TZT30CW	Z-diode	Dual, 28.0..32.0V, Izt=2mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3a	Ttr
YK-	-	2SC4901	Si-npn	UHF/VHF WB-amp, 15V, 50mA, 150mW, 9GHz, B=50..250	CMPAK	16ta	-	3a	Ren
YK-	-	2SC5218	Si-npn	VHF/UHF, 15V, 50mA, 9GHz	SOT-23	16ta	-	3a	Ren
YK1	-	CHDTA123YKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	Chm
YK3	-	CHDTB123YKPT	Si-pnp-Digi	Sw, 50V, 500mA, 200MHz, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	Chm
YKA	-	CHDTC123YKPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	Chm
YKC	-	CHDTD123YKPT	Si-npn-Digi	Sw, 50V, 500mA, 200MHz, R1/R2=2.2k/10k	SOT-23	16ta	-	3a	Chm
YL	-	2SK210-BL	n-FET	VHF-FM, 18V, 10mA, 100mW, Idss=12..24mA, Nf=1.8dB	SC-59	16fk	-	3a	Tos
YL	-	CZMK33	Z-diode	Dual, 33V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
YL	-	TZT33CW	Z-diode	Dual, 31.0..35.0V, Izt=2mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3a	Ttr
YL-	-	2SC4902	Si-npn	VHF/UHF, 20V, 30mA, 150mW, B=50..250, 6GHz	SOT-23	16ta	-	3a	Ren
YL-	-	2SC4903	Si-npn	VHF/UHF, LN, 20V, 30mA, 100mW, B=50..250, 6GHz	SOT-323	16ta	-	3a	Ren
YL-	-	2SC5138	Si-npn	VHF/UHF, 20V, 30mA, 80mW, B=50..250, 6GHz	SOT-23	16ta	-	3a	Ren
YL09	-	SGM2021-09YN3G	LVR-IC	LDO, 0.9V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL12	-	SGM2021-1.2YN3G	LVR-IC	LDO, 1.2V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL13	-	SGM2021-1.3YN3G	LVR-IC	LDO, 1.3V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL15	-	SGM2021-1.5YN3G	LVR-IC	LDO, 1.5V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL18	-	SGM2021-1.8YN3G	LVR-IC	LDO, 1.8V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL21	-	SGM2021-2.1YN3G	LVR-IC	LDO, 2.1V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL25	-	SGM2021-2.5YN3G	LVR-IC	LDO, 2.5V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL26	-	SGM2021-2.6YN3G	LVR-IC	LDO, 2.6V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL27	-	SGM2021-2.7YN3G	LVR-IC	LDO, 2.7V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL28	-	SGM2021-2.8YN3G	LVR-IC	LDO, 2.8V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL29	-	SGM2021-2.9YN3G	LVR-IC	LDO, 2.9V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL2J	-	SGM2021-2.85YN3G	LVR-IC	LDO, 2.85V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL3	-	2SA1607-3	Si-pnp	Sw, 40V, 150mA, 200mA, B=60..120, 700MHz	SOT-23	16ta	-	3a	San
YL3	-	2SA1685-3	Si-pnp	Sw, 20V, 150mA, 150mW, B=60..120, 700MHz	MCP	16ta	-	3a	San
YL30	-	SGM2021-3.0YN3G	LVR-IC	LDO, 3.0V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL31	-	SGM2021-3.1YN3G	LVR-IC	LDO, 3.1V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL32	-	SGM2021-3.2YN3G	LVR-IC	LDO, 3.2V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL33	-	SGM2021-3.3YN3G	LVR-IC	LDO, 3.3V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL36	-	SGM2021-3.6YN3G	LVR-IC	LDO, 3.6V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL4	-	2SA1607-4	Si-pnp	Sw, 40V, 150mA, 200mA, B=90..180, 700MHz	SOT-23	16ta	-	3a	San
YL4	-	2SA1685-4	Si-pnp	Sw, 20V, 150mA, 150mW, B=90..180, 700MHz	MCP	16ta	-	3a	San
YL42	-	SGM2021-4.2YN3G	LVR-IC	LDO, 4.2V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YL50	-	SGM2021-5.0YN3G	LVR-IC	LDO, 5.0V±2.2%, 300mA	SOT-23	16cq	VR1	3a	Sgm
YM	-	30C02S	Si-npn	AF, GP, 40V, 600mA, 200mW, B=300..600, 540MHz	SMCP	16ta	-	3a	San
YM	-	30C02SS	Si-npn	AF, GP, 40V, 600mA, 200mW, B=300..600, 540MHz	SSFP	18ta	-	3a	San
YM	-	CZMK36	Z-diode	Dual, 36V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
YM	-	RN2111	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1=10k	SOT-416	16ta	-	3a	Tos
YM	-	RN2111FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1=10k	TESM	18ta	-	3a	Tos
YM	-	RN2311	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1=10k	SOT-346	16ta	-	3a	Tos
YM	-	RN2411	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1=10k	SOT-346	16ta	-	3a	Tos
YM	-	TZT36CW	Z-diode	Dual, 34.0..38.0V, Izt=2mA, Zzt=90Ω, 300mW	SOT-23	16dg	-	3a	Ttr
YM-	-	2SC4904	Si-npn	VHF/UHF, 20V, 50mA, 150mW, B=50..250, 5.8GHz	SOT-23	16ta	-	3a	Ren
YM-	-	2SC4905	Si-npn	VHF/UHF, LN, 20V, 50mA, 100mW, B=50..250, 5.8GHz	SOT-323	16ta	-	3a	Ren
YN	-	50C02S	Si-npn	AF, GP, 60V, 400mA, 200mW, B=300..800, 500MHz	SMCP	16ta	-	3a	San
YN	-	50C02SS	Si-npn	AF, GP, 60V, 400mA, 200mW, B=300..800, 500MHz	SSFP	18ta	-	3a	San
YN	-	CZMK39	Z-diode	Dual, 39V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
YN	-	RN2112	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1=22k	SOT-416	16ta	-	3a	Tos
YN	-	RN2112FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1=22k	TESM	18ta	-	3a	Tos
YN	-	RN2312	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1=22k	SOT-346	16ta	-	3a	Tos
YN	-	TZT39CW	Z-diode	Dual, 37.0..41.0V, Izt=2mA, Zzt=130Ω, 300mW	SOT-23	16dg	-	3a	Ttr
YN-	-	2SC4906	Si-npn	VHF/UHF, LN, 20V, 50mA, 100mW, B=50..250, 5.8GHz	SOT-323	16ta	-	3a	Ren
YN-	-	2SC5141	Si-npn	VHF/UHF, 20V, 50mA, 80mW, B=50..250, 5.8GHz	SOT-23	16ta	-	3a	Ren
YP	-	15C01C	Si-npn	AF, GP, 20V, 700mA, 300mW, B=300..600, 330MHz	CP	16ta	-	3a	San
YP	-	15C01M	Si-npn	AF, GP, 20V, 700mA, 300mW, B=300..600, 330MHz	MCP	16ta	-	3a	San
YP	-	15C01S	Si-npn	AF, GP, 20V, 600mA, 200mW, B=300..600, 330MHz	SMCP	16ta	-	3a	San
YP	-	15C01SS	Si-npn	AF, GP, 20V, 600mA, 200mW, B=300..600, 330MHz	SSFP	18ta	-	3a	San
YP	-	2SD1484K-P	Si-npn	AF-Drv, 50V, 500mA, 200mW, B=82..180, >250MHz	SOT-346	16ta	-	3a	Rhm
YP	-	2SD1949K-P	Si-npn	AF-Drv, 50V, 500mA, 200mW, B=82..180, >250MHz	SOT-323	16ta	-	3a	Rhm
YP	-	2SD1949-P	Si-npn	AF, 50V, 500mA, 200mW, B=82..180, >250MHz	SOT-323	16ta	-	3a	Rhm
YP	-	DDZX6V8C	Z-diode	6.8V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
YP	-	RN2113	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1=47k	SOT-416	16ta	-	3a	Tos

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
YP	-	RN2113FT	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1=47k	TESM	18ta	-	3a	Tos
YP	-	RN2313	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1=47k	SOT-346	16ta	-	3a	Tos
YQ	-	2PA1774Q	Si-pnp	LN, 50V, 100mA, 150mW, >100MHz, B=120..270	SOT-416	16ta	-	3a	Phi
YQ	-	2PA1774QJ	Si-pnp	LN, 50V, 100mA, 250mW, >100MHz, B=120..270	SOT-490	18ta	-	3a	Phi
YQ	-	2PD601Q	Si-npn	GP, Sw, 60V, 100mA, 250mW, B=160..260, >100MHz	SOT-23	16ta	-	3a	Phi
YQ	-	2SD1484K-Q	Si-npn	AF-Drv, 50V, 500mA, 200mW, B=120..270, >250MHz	SOT-346	16ta	-	3a	Rhm
YQ	-	2SD1949K-Q	Si-npn	AF-Drv, 50V, 500mA, 200mW, B=120..270, >250MHz	SOT-323	16ta	-	3a	Rhm
YQ	-	2SD1949-Q	Si-npn	AF, 50V, 500mA, 200mW, B=120..270, >250MHz	SOT-323	16ta	-	3a	Rhm
YQ	-	2SD2216-Q	Si-npn	GP, 60V, 200mA, 125mW, 150MHz, B=160..260	SOT-416	16ta	-	3a	Pan
YQ	-	2SD601-Q	Si-npn	GP, AF, 50V, 600mA, B=160..260, 150MHz	SC-59	16ta	-	3a	Pan
YQ	-	30C01C	Si-npn	AF, GP, 40V, 400mA, 300mW, B=300..600, 380MHz	CP	16ta	-	3a	San
YQ	-	30C01M	Si-npn	AF, GP, 40V, 400mA, 300mW, B=300..600, 380MHz	MCP	16ta	-	3a	San
YQ	-	30C01S	Si-npn	AF, GP, 40V, 400mA, 200mW, B=300..600, 380MHz	SMCP	16ta	-	3a	San
YQ	-	30C01SS	Si-npn	AF, GP, 40V, 400mA, 200mW, B=300..600, 380MHz	SSFP	18ta	-	3a	San
YQ	-	DDZX7V5C	Z-diode	7.5V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
YQ	-	RN2114	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=1k/10k	SOT-416	16ta	-	3a	Tos
YQ	-	RN2114FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=1k/10k	SOT-723	18ta	-	3a	Tos
YQ	-	RN2314	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=1k/10k	SOT-346	16ta	-	3a	Tos
YQ	-	RN2414	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=1k/10k	SOT-346	16ta	-	3a	Tos
YQB	-	2SA1867-B	Si-pnp	GP, AF, 20V, 500mA, 100mW, B=60..120	SOT-23	16ta	-	3a	Hit
YQC	-	2SA1867-C	Si-pnp	GP, AF, 20V, 500mA, 100mW, B=100..200	SOT-23	16ta	-	3a	Hit
YQD	-	2SA1867-D	Si-pnp	GP, AF, 20V, 500mA, 100mW, B=120..240	SOT-23	16ta	-	3a	Hit
YR	-	2PA1774R	Si-pnp	LN, 50V, 100mA, 150mW, >100MHz, B=180..390	SOT-416	16ta	-	3a	Phi
YR	-	2PA1774RJ	Si-pnp	LN, 50V, 100mA, 250mW, >100MHz, B=180..390	SOT-490	18ta	-	3a	Phi
YR	-	2PD601R	Si-npn	GP, Sw, 60V, 100mA, 250mW, B=210..340, >120MHz	SOT-23	16ta	-	3a	Phi
YR	-	2SD1484K-R	Si-npn	AF-Drv, 50V, 500mA, 200mW, B=180..390, >250MHz	SOT-346	16ta	-	3a	Tos
YR	-	2SD1949K-R	Si-npn	AF-Drv, 50V, 500mA, 200mW, B=180..390, >250MHz	SOT-323	16ta	-	3a	Rhm
YR	-	2SD1949-R	Si-npn	AF, 50V, 500mA, 200mW, B=180..390, >250MHz	SOT-323	16ta	-	3a	Rhm
YR	-	2SD2216-R	Si-npn	GP, 60V, 200mA, 125mW, 150MHz, B=210..340	SOT-416	16ta	-	3a	Pan
YR	-	2SD601-R	Si-npn	GP, AF, 50V, 600mA, B=210..340, 150MHz	SC-59	16ta	-	3a	Pan
YR	-	DDZX8V2C	Z-diode	8.2V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
YR	-	MSD601-R	Si-npn	GP, 60V, 100mA, 200mW, B=210..340	SOT-323	16ta	-	3a	Mot
YS	-	2PA1774S	Si-pnp	LN, 50V, 100mA, 150mW, >100MHz, B=270..560	SOT-416	16ta	-	3a	Phi
YS	-	2PA1774SJ	Si-pnp	LN, 50V, 100mA, 250mW, >100MHz, B=270..560	SOT-490	18ta	-	3a	Phi
YS	-	2PD601S	Si-npn	GP, Sw, 60V, 100mA, 250mW, B=290..460, >140MHz	SOT-23	16ta	-	3a	Phi
YS	-	2SD2216-S	Si-npn	GP, 60V, 200mA, 125mW, 150MHz, B=290..460	SOT-416	16ta	-	3a	Pan
YS	-	2SD601-S	Si-npn	GP, AF, 50V, 600mA, B=290..460, 150MHz	SC-59	16ta	-	3a	Pan
YS	-	DDZX9V1C	Z-diode	9.1V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
YS	-	MSD601-S	Si-npn	GP, 60V, 100mA, 200mW, B=290..460	SOT-323	16ta	-	3a	Mot
YS	-	RN2115	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=2.2k/10k	SOT-416	16ta	-	3a	Tos
YS	-	RN2115FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=2.2k/10k	SOT-723	18ta	-	3a	Tos
YS	-	RN2315	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=2.2k/10k	SOT-346	16ta	-	3a	Tos
YS	-	RN2415	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=2.2k/10k	SOT-346	16ta	-	3a	Tos
YT	-	08C02SS	Si-npn	AF, GP, 15V, 800mA, 200mW, B=300..800, 400MHz	SSFP	18ta	-	3a	San
YT	-	2SC4851	Si-npn	Mute, 25V, 0.1A, 0.2W, B=800..3200, 240MHz, Ron<0.9Ω	MCP	16ta	-	3a	San
YT	-	2SC4852	Si-npn	Mute, 25V, 0.1A, 0.25W, B=800..3200, 240MHz, Ron=0.9Ω	CP	16ta	-	3a	San
YT	-	DDZX10C	Z-diode	10V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
YT	-	RN2116	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=4.7k/10k	SOT-416	16ta	-	3a	Tos
YT	-	RN2316	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=4.7k/10k	SOT-346	16ta	-	3a	Tos
YT	-	RN2416	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=4.7k/10k	SOT-346	16ta	-	3a	Tos
YU	-	DDZX11C	Z-diode	11V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
YU	-	RN2117	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=10k/4.7k	SOT-416	16ta	-	3a	Tos
YU	-	RN2117FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=10k/4.7k	SOT-723	18ta	-	3a	Tos
YU	-	RN2317	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=10k/4.7k	SOT-346	16ta	-	3a	Tos
YU	-	RN2417	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=10k/4.7k	SOT-346	16ta	-	3a	Tos
YU1	-	CHDTA123YUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/10k	SOT-323	16ta	-	3a	Chm
YUA	-	CHDTC123YUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=2.2k/10k	SOT-323	16ta	-	3a	Chm
YV	-	DDZX12C	Z-diode	12V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
YV-	-	2SC4964	Si-npn	UHF/VHF, 12V, 100mA, 100mW, B=100..600	SOT-23	16ta	-	3a	Ren
YV-	-	2SC4965	Si-npn	UHF/VHF, 12V, 100mA, 100mW, B=100..600	SOT-323	16ta	-	3a	Ren
YW	-	CHT5551WPT	Si-npn	Drv, 160V, 200mA, B=80..250, 300MHz	SOT-323	16ta	-	3a	Chm
YW	-	RN2118	Si-pnp-Digi	Sw, 50V, 100mA, 100mW, R1/R2=47k/10k	SOT-416	16ta	-	3a	Tos
YW	-	RN2118FV	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=47k/10k	SOT-723	18ta	-	3a	Tos
YW	-	RN2318	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=47k/10k	SOT-346	16ta	-	3a	Tos
YW	-	RN2418	Si-pnp-Digi	Sw, 50V, 100mA, 400mW, R1/R2=47k/10k	SOT-346	16ta	-	3a	Tos
YW-	-	2SC4966	Si-npn	VHF/UHF, 12V, 100mA, 150mW, B=100..600	SOT-23	16ta	-	3a	Ren
YW-	-	2SC4967	Si-npn	VHF/UHF Ant.-Sw, 12V, 100mA, 100mW, B=100..600	SOT-323	16ta	-	3a	Ren
YY	-	2SK210-Y	n-FET	VHF-FM, 18V, 10mA, 100mW, Idss=3..7mA, Nf=1.8dB	SC-59	16fk	-	3a	Tos
YY	-	DDZX16	Z-diode	16V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
YY1	-	CMPZDA11V	Z-diode	Dual, 11V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
YY2	-	CMPZDA12V	Z-diode	Dual, 12V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
YY3	-	2SC4104-3	Si-npn	Vid, 70V, 50mA, 200mW, B=60..120, 700MHz	SOT-23	16ta	-	3a	San
YY3	-	CMPZDA13V	Z-diode	Dual, 13V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
YY4	-	2SC4104-4	Si-npn	Vid, 70V, 50mA, 200mW, B=90..180, 700MHz	SOT-23	16ta	-	3a	San
YY4	-	CMPZDA15V	Z-diode	Dual, 15V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
YY5	-	2SC4104-5	Si-npn	Vid, 70V, 50mA, 200mW, B=135..270, 700MHz	SOT-23	16ta	-	3a	San
YY5	-	CMPZDA16V	Z-diode	Dual, 16V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
YY6	-	CMPZDA18V	Z-diode	Dual, 18V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
YY7	-	CMPZDA20V	Z-diode	Dual, 20V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
YY8	-	CMPZDA22V	Z-diode	Dual, 22V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
YY9	-	CMPZDA24V	Z-diode	Dual, 24V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
YZ	-	DDZX18C	Z-diode	18V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
YZ-	-	2SC5050	Si-npn	VHF/UHF, LN, 15V, 50mA, 150mW, B=50..250, 11GHz	SC-59A	16ta	-	3a	Ren
YZ-	-	2SC5051	Si-npn	VHF/UHF, LN, 15V, 50mA, 100mW, B=50..250, 11GHz	CMPAK	16ta	-	3a	Ren
YZ-	-	2SC5139	Si-npn	VHF/UHF, 15V, 50mA, 80mW, B=50..250, 11GHz	SMPAK	16ta	-	3a	Ren
z	-	AX6904EA	Vdet-IC	2.93V±1.5%, +Reset PPO	SC-70	16vda	VD7	3b	Axl
Z	cr	ELM7515NEB	Vdet-IC	1.5V±2%, +Reset ODO	SC-70	16vdb	VD6	3d	Elm
Z	cs	ELM7515CEB	Vdet-IC	1.5V±2%, +Reset PPO	SC-70	16vdb	VD7	3d	Elm
Z0	-	ELM7640LCB	Vdet-IC	4.0V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
Z0	-	MMBZ5223B	Z-diode	2.7V±5%, Izt=20mA, Zzt=30Ω, 350mW	SOT-23	16dc	-	3c	Jiy
Z0	-	SST310	n-FET	UHF/VHF-Amp/Mix/Osc, 25V, 350mW, Idss=24..60mA, Up<6.5V	SOT-23	16fj	-	3a	Six
Z08	-	SST308	n-FET	UHF/VHF-Amp/Mix/Osc, 25V, 350mW, Idss=12..60mA, Up<6.5V	SOT-23	16fj	-	3a	Cal
Z09	-	SST309	n-FET	UHF/VHF-Amp/Mix/Osc, 25V, 350mW, Idss=12..30mA, Up<1.4V	SOT-23	16fj	-	3a	Cal
Z1	-	BZX84B4V7	Z-diode	4.61..4.79V, Zzt=80Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Z1	-	BZX84C4V7	Z-diode	4.4..5.0V, Zzt=80Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Z1	-	BZX84-C4V7	Z-diode	4.4..5.0V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Z1	-	BZX84C4V7LT1	Z-diode	4.4..5.0V, Zzt=80Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Z1	-	BZX88-C4V7	Z-diode	4.7V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
Z1	-	CZRT55C4V7	Z-diode	4.4..5.0V, Zzt=80Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Z1	-	ELM7641LCB	Vdet-IC	4.1V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
Z1	-	LBZX84C4V7L	Z-diode	4.4..5V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z1	-	SSTJ211	n-FET	UHF/VHF-Amp/Mix/Osc, 25V, 360mW, Idss=7..20mA	SOT-23	16fj	-	3a	Lns
Z1	-	TC1274-10ENB	Vdet-IC	4.37V±1%, +Reset PPO	SOT-23	16vdb	VD7	3d	Mcc
Z1	co	BZX84C4V7LT1G	Z-diode	4.4..5.0V, Zzt=80Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Z10	-	SST310	n-FET	UHF/VHF-Amp/Mix/Osc, 25V, 350mW, Idss=24..60mA, Up<6.5V	SOT-23	16fj	-	3a	Cal
Z10	-	SSTJ210	n-FET	UHF/VHF-Amp/Mix/Osc, 25V, 360mW, Idss=15..40mA	SOT-23	16fj	-	3a	Cal
Z11	-	BZX84C2V4	Z-diode	2.28..2.52V, Zzt=100Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Z11	-	BZX84-C2V4	Z-diode	2.4V±5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z11	-	BZX84C2V4LT1	Z-diode	2.2..2.6V, Zzt=100Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Z11	-	CZRT55C2V4	Z-diode	2.2..2.6V, Zzt=100Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Z11	-	LBZX84C2V4L	Z-diode	2.2..2.6V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z11	-	SSTJ211	n-FET	UHF/VHF-Amp/Mix/Osc, 25V, 360mW, Idss=7..20mA	SOT-23	16fj	-	3a	Cal
Z11	cn	BZX84C2V4LT1G	Z-diode	2.2..2.6V, Zzt=100Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Z12	-	BZX84C2V7	Z-diode	2.5..2.9V, Zzt=100Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Z12	-	BZX84-C2V7	Z-diode	2.7V±5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z12	-	BZX84C2V7LT1	Z-diode	2.5..2.9V, Zzt=100Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Z12	-	CZRT55C2V7	Z-diode	2.5..2.9V, Zzt=100Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Z12	-	LBZX84C2V7L	Z-diode	2.5..2.9V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z12	-	SSTJ212	n-FET	UHF/VHF-Amp/Mix/Osc, 25V, 360mW, Idss=7..20mA	SOT-23	16fj	-	3a	Cal
Z12	cn	BZX84C2V7LT1G	Z-diode	2.5..2.9V, Zzt=100Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Z13	-	BZX84C3V0	Z-diode	2.8..3.2V, Zzt=95Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Z13	-	BZX84-C3V0	Z-diode	3.0V±5%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z13	-	BZX84C3V0LT1	Z-diode	2.8..3.2V, Zzt=95Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Z13	-	CZRT55C3	Z-diode	2.8..3.2V, Zzt=95Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Z13	-	LBZX84C3V0L	Z-diode	2.8..3.2V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z13	cn	BZX84C3V0LT1G	Z-diode	2.8..3.2V, Zzt=95Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Z14	-	BZX84C3V3	Z-diode	3.1..3.5V, Zzt=95Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Z14	-	BZX84-C3V3	Z-diode	3.3V±5%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z14	-	BZX84C3V3LT1	Z-diode	3.1..3.5V, Zzt=95Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Z14	-	CZRT55C3V3	Z-diode	3.1..3.5V, Zzt=95Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Z14	-	LBZX84C3V3L	Z-diode	3.1..3.5V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z14	cn	BZX84C3V3LT1G	Z-diode	3.1..3.5V, Zzt=95Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Z15	-	BZX84C3V6	Z-diode	3.4..3.8V, Zzt=90Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Z15	-	BZX84-C3V6	Z-diode	3.6V±5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z15	-	BZX84C3V6LT1	Z-diode	3.4..3.8V, Zzt=90Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Z15	-	CZRT55C3V6	Z-diode	3.4..3.8V, Zzt=90Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Z15	-	LBZX84C3V6L	Z-diode	3.4..3.8V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z15	cn	BZX84C3V6LT1G	Z-diode	3.4..3.8V, Zzt=90Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Z15A	-	ML6206P153M	LVR-IC	1.5V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z16	-	BZX84C3V9	Z-diode	3.7..4.1V, Zzt=90Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Z16	-	BZX84-C3V9	Z-diode	3.9V±5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z16	-	BZX84C3V9LT1	Z-diode	3.7..4.1V, Zzt=90Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Z16	-	CZRT55C3V9	Z-diode	3.7..4.1V, Zzt=90Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Z16	-	LBZX84C3V9L	Z-diode	3.7..4.1V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z16	cn	BZX84C3V9LT1G	Z-diode	3.7..4.1V, Zzt=90Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Z16A	-	ML6206P163M	LVR-IC	1.6V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z17	-	BZX84C4V3	Z-diode	4..4.6V, Zzt=90Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Z17	-	BZX84-C4V3	Z-diode	4.3V±5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z17	-	CZRT55C4V3	Z-diode	4.0..4.6V, Zzt=90Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Z17A	-	ML6206P173M	LVR-IC	1.7V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z18A	-	ML6206P183M	LVR-IC	1.8V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z19A	-	ML6206P193M	LVR-IC	1.9V±3%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z1p	-	BZX84-C4V7	Z-diode	4.7V±5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Z1t	-	BZX84-C4V7	Z-diode	4.7V±5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Z1W	-	BZX84-C4V7	Z-diode	4.7V±5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Z1Z	-	CMSZDA4V7	Z-diode	Dual, 4.4..5.0V, Zzt=80Ω, 38mA, 275mW	SOT-323	16df	-	3a	Cen
Z2	-	BZX84B5V1	Z-diode	5.0..5.20V, Zzt=60Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Z2	-	BZX84C5V1	Z-diode	4.8..5.4V, Zzt=60Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Z2	-	BZX84-C5V1	Z-diode	4.8..5.4V, Zzt=60Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Z2	-	BZX84C5V1LT1	Z-diode	4.8..5.4V, Zzt=60Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Z2	-	BZX88-C5V1	Z-diode	5.1V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
Z2	-	CZRT55C5V1	Z-diode	4.8..5.4V, Zzt=60Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Z2	-	ELM7642LCB	Vdet-IC	4.2V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
Z2	-	KTA2015-2	Si-pnp	AF, Sw, 35V, 500mA, 100mW, B=40..120, 200MHz	USM	16ta	-	3f	Kec
Z2	-	LBZX84C5V1L	Z-diode	4.8..5.4V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z2	-	NTE5010SM	Z-diode	5.1V±5%, If=250mA, 300mW	SOT-23	16dc	-	3a	Nte
Z2	-	SSTJ212	n-FET	UHF/VHF-Amp/Mix/Osc, 25V, 360mW, Idss=7..20mA	SOT-23	16fj	-	3a	Lns
Z2	-	TC1274-15ENB	Vdet-IC	4.12V±1%, +Reset PPO	SOT-23	16vdb	VD7	3d	Mcc
Z2	co	BZX84C5V1LT1G	Z-diode	4.8..5.4V, Zzt=60Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Z20A	-	ML6206P202M	LVR-IC	2.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z21	-	DTC113ZKA	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=1k/10k	SOT-346	16ta	-	3a	Rhm
Z21A	-	ML6206P212M	LVR-IC	2.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z22A	-	ML6206P222M	LVR-IC	2.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z23A	-	ML6206P232M	LVR-IC	2.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z24A	-	ML6206P242M	LVR-IC	2.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z25A	-	ML6206P252M	LVR-IC	2.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z26A	-	ML6206P262M	LVR-IC	2.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z27A	-	ML6206P272M	LVR-IC	2.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z28A	-	ML6206P282M	LVR-IC	2.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z29A	-	ML6206P292M	LVR-IC	2.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z2p	-	BZX84-C5V1	Z-diode	5.1V±5%, Zzt=60Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Z2t	-	BZX84-C5V1	Z-diode	5.1V±5%, Zzt=60Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Z2U	-	FMMTA63	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>5000, >125MHz	SOT-23	16ta	-	3a	Zx
Z2V	-	FMMTA64	Si-pnp-Darl	GP, 30V, 500mA, 300mW, B>10000, >125MHz	SOT-23	16ta	-	3a	Zx
Z2W	-	BZX84-C5V1	Z-diode	5.1V±5%, Zzt=60Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Z2Z	-	CMSZDA5V1	Z-diode	Dual, 4.8..5.4V, Zzt=60Ω, 35mA, 275mW	SOT-323	16df	-	3a	Cen
Z3	-	BZX84B5V6	Z-diode	5.49..5.71V, Zzt=40Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Z3	-	BZX84C5V6	Z-diode	5.2..6.0V, Zzt=40Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Z3	-	BZX84-C5V6	Z-diode	5.2..6.0V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Z3	-	BZX84C5V6LT1	Z-diode	5.2..6.0V, Zzt=40Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Z3	-	BZX88-C5V6	Z-diode	5.6V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
Z3	-	CZRT55C5V6	Z-diode	5.2..6.0V, Zzt=40Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Z3	-	ELM7643LCB	Vdet-IC	4.3V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
Z3	-	LBZX84C5V6L	Z-diode	5.2..6V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z3	-	NTE5011SM	Z-diode	5.6V±5%, If=250mA, 300mW	SOT-23	16dc	-	3a	Nte
Z3	-	TC1274-5ENB	Vdet-IC	4.62V±1%, +Reset PPO	SOT-23	16vdb	VD7	3d	Mcc
Z3	co	BZX84C5V6LT1G	Z-diode	5.2..6.0V, Zzt=40Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Z30A	-	ML6206P302M	LVR-IC	3.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z31A	-	ML6206P312M	LVR-IC	3.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z32A	-	ML6206P322M	LVR-IC	3.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z33A	-	ML6206P332M	LVR-IC	3.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z34A	-	ML6206P342M	LVR-IC	3.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z35A	-	ML6206P352M	LVR-IC	3.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z36A	-	ML6206P362M	LVR-IC	3.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z37A	-	ML6206P372M	LVR-IC	3.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z38A	-	ML6206P382M	LVR-IC	3.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z39A	-	ML6206P392M	LVR-IC	3.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z3p	-	BZX84-C5V6	Z-diode	5.6V±5%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Z3t	-	BZX84-C5V6	Z-diode	5.6V±5%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Z3W	-	BZX84-C5V6	Z-diode	5.6V±5%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Z3Z	-	CMSZDA5V6	Z-diode	Dual, 5.2..6.0V, Zzt=40Ω, 32mA, 275mW	SOT-323	16df	-	3a	Cen
Z4	-	BZX84B6V2	Z-diode	6.08..6.32V, Zzt=10Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Z4	-	BZX84C6V2	Z-diode	5.8..6.6V, Zzt=10Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Z4	-	BZX84-C6V2	Z-diode	5.8..6.6V, Zzt=10Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Z4	-	BZX84C6V2LT1	Z-diode	5.8..6.6V, Zzt=10Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Z4	-	BZX88-C6V2	Z-diode	6.2V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
Z4	-	CZRT55C6V2	Z-diode	5.8..6.6V, Zzt=10Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Z4	-	ELM7644LCB	Vdet-IC	4.4V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
Z4	-	KA4F4Z	Si-npn-Digi	Sw, 60V, 100mA, 200mW, R1=22k	SOT-416	16ta	-	3a	Nec
Z4	-	KTA2015-4	Si-pnp	AF, Sw, 35V, 500mA, 100mW, B=120..240, 200MHz	USM	16ta	-	3f	Kec
Z4	-	LBZX84C6V2L	Z-diode	5.8..6.6V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z4	-	NTE5013SM	Z-diode	6.2V±5%, If=250mA, 300mW	SOT-23	16dc	-	3a	Nte
Z4	co	BZX84C6V2LT1G	Z-diode	5.8..6.6V, Zzt=10Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Z40A	-	ML6206P402M	LVR-IC	4.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z41A	-	ML6206P412M	LVR-IC	4.1V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z42A	-	ML6206P422M	LVR-IC	4.2V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z43A	-	ML6206P432M	LVR-IC	4.3V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z44A	-	ML6206P442M	LVR-IC	4.4V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z45A	-	ML6206P452M	LVR-IC	4.5V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z46A	-	ML6206P462M	LVR-IC	4.6V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z47A	-	ML6206P472M	LVR-IC	4.7V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z48A	-	ML6206P482M	LVR-IC	4.8V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z49A	-	ML6206P492M	LVR-IC	4.9V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z4p	-	BZX84-C6V2	Z-diode	6.2V±5%, Zzt=10Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Z4t	-	BZX84-C6V2	Z-diode	6.2V±5%, Zzt=10Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Z4W	-	BZX84-C6V2	Z-diode	6.2V±5%, Zzt=10Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Z4Z	-	CMSZDA6V2	Z-diode	Dual, 5.8..6.6V, Zzt=10Ω, 28mA, 275mW	SOT-323	16df	-	3a	Cen
Z5	-	BZX84B6V8	Z-diode	6.66..6.94V, Zzt=15Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Z5	-	BZX84C6V8	Z-diode	6.4..7.2V, Zzt=15Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Z5	-	BZX84-C6V8	Z-diode	6.4..7.2V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Z5	-	BZX84C6V8LT1	Z-diode	6.4..7.2V, Zzt=15Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Z5	-	BZX88-C6V8	Z-diode	6.8V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
Z5	-	CZRT55C6V8	Z-diode	6.4..7.2V, Zzt=15Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Z5	-	ELM7645LCB	Vdet-IC	4.5V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
Z5	-	LBZX84C6V8L	Z-diode	6.4..7.2V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z5	-	NTE5014SM	Z-diode	6.8V±5%, If=250mA, 300mW	SOT-23	16dc	-	3a	Nte
Z5	co	BZX84C6V8LT1G	Z-diode	6.4..7.2V, Zzt=15Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Z50	-	BZX84-B2V4	Z-diode	2.4V±2.5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z50	-	BZX84B2V4-V	Z-diode	2.35..2.45V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z50	-	LBZX84B2V4L	Z-diode	2.43..2.63V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z50A	-	ML6206P502M	LVR-IC	5.0V±2%, 250mA	SOT-23	16cg	VR1	3a	Mlc
Z51	-	BZX84-B2V7	Z-diode	2.7V±2.5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z51	-	BZX84B2V7-V	Z-diode	2.64..2.75V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z51	-	LBZX84B2V7L	Z-diode	2.69..2.91V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z52	-	BZX84-B3V0	Z-diode	3.0V±2.5%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z52	-	BZX84B3V0-V	Z-diode	2.94..3.06V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z52	-	LBZX84B3V0L	Z-diode	3.01..3.22V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z53	-	BZX84-B3V3	Z-diode	3.3V±2.5%, Zzt=95Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z53	-	BZX84B3V3-V	Z-diode	3.23..3.37V, Zzt=95Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z53	-	LBZX84B3V3L	Z-diode	3.32..3.53V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z54	-	BZX84-B3V6	Z-diode	3.6V±2.5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z54	-	BZX84B3V6-V	Z-diode	3.52..3.67V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z55	-	BZX84-B3V9	Z-diode	3.9V±2.5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z55	-	BZX84B3V9-V	Z-diode	3.82..3.98V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z55	-	LBZX84B3V9L	Z-diode	3.89..4.16V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z56	-	BZX84-B4V3	Z-diode	4.3V±2.5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z56	-	BZX84B4V3-V	Z-diode	4.21..4.39V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z56	-	LBZX84B4V3L	Z-diode	4.17..4.43V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z57	-	BZX84-B4V7	Z-diode	4.7V±2.5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z57	-	BZX84B4V7-V	Z-diode	4.61..4.79V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z58	-	BZX84-B5V1	Z-diode	5.1V±2.5%, Zzt=60Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z58	-	BZX84B5V1-V	Z-diode	5.0..5.20V, Zzt=60Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z59	-	BZX84-B5V6	Z-diode	5.6V±2.5%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z59	-	BZX84B5V6-V	Z-diode	5.49..5.71V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z5p	-	BZX84-C6V8	Z-diode	6.8V±5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Z5t	-	BZX84-C6V8	Z-diode	6.8V±5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Z5W	-	BZX84-C6V8	Z-diode	6.8V±5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Z5Z	-	CMSZDA6V8	Z-diode	Dual, 6.5..7.2V, Zzt=15Ω, 25mA, 275mW	SOT-323	16df	-	3a	Cen
Z6	-	BZX84B7V5	Z-diode	7.35..7.65V, Zzt=15Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Z6	-	BZX84C7V5	Z-diode	7.0..7.9V, Zzt=15Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Z6	-	BZX84-C7V5	Z-diode	7.0..7.9V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Z6	-	BZX84C7V5LT1	Z-diode	7.0..7.9V, Zzt=15Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Z6	-	BZX88-C7V5	Z-diode	7.5V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
Z6	-	CZRT55C7V5	Z-diode	7.0..7.9V, Zzt=15Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Z6	-	ELM7646LCB	Vdet-IC	4.6V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
Z6	-	ELM9716CBB	Vdet-IC	1.6V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
Z6	-	LBZX84C7V5L	Z-diode	7..7.9V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z6	-	NTE5015SM	Z-diode	7.5V±5%, If=250mA, 300mW	SOT-23	16dc	-	3a	Nte
Z6	co	BZX84C7V5LT1G	Z-diode	7.0..7.9V, Zzt=15Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Z60	-	BZX84-B6V2	Z-diode	6.2V±2.5%, Zzt=10Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z60	-	BZX84B6V2-V	Z-diode	6.08..6.32V, Zzt=10Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z61	-	BZX84-B6V8	Z-diode	6.8V±2.5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z61	-	BZX84B6V8-V	Z-diode	6.66..6.94V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z62	-	BZX84-B7V5	Z-diode	7.5V±2.5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z62	-	BZX84B7V5-V	Z-diode	7.35..7.65V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z63	-	BZX84-B8V2	Z-diode	8.2V±2.5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z63	-	BZX84B8V2-V	Z-diode	8.04..8.36V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z64	-	BZX84-B9V1	Z-diode	9.1V±2.5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z64	-	BZX84B9V1-V	Z-diode	8.92..9.28V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z65	-	BZX84-B10	Z-diode	10V±2.5%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z65	-	BZX84B10-V	Z-diode	9.80..10.20V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z65	-	LBZX84B10L	Z-diode	9.77..10.21V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z66	-	BZX84-B11	Z-diode	11V±2.5%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z66	-	BZX84B11-V	Z-diode	10.78..11.22V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z66	-	LBZX84B11L	Z-diode	10.76..11.22V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z67	-	BZX84-B12	Z-diode	12V±2.5%, Zzt=25Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z67	-	BZX84B12-V	Z-diode	11.76..12.24V, Zzt=25Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z67	-	LBZX84B12L	Z-diode	11.74..12.24V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z68	-	BZX84-B13	Z-diode	13V±2.5%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z68	-	BZX84B13-V	Z-diode	12.74..13.26V, Zzt=30Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z68	-	LBZX84B13L	Z-diode	12.91..13.49V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z69	-	BZX84-B15	Z-diode	15V±2.5%, Zzt=30Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z69	-	BZX84B15-V	Z-diode	14.70..15.30V, Zzt=30Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z69	-	LBZX84B15L	Z-diode	14.34..14.98V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z6p	-	BZX84-C7V5	Z-diode	7.5V±5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Z6t	-	BZX84-C7V5	Z-diode	7.5V±5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Z6W	-	BZX84-C7V5	Z-diode	7.5V±5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Z6Z	-	CMSZDA7V5	Z-diode	Dual, 7.0..7.9V, Zzt=15Ω, 23mA, 275mW	SOT-323	16df	-	3a	Cen
Z7	-	BZX84B8V2	Z-diode	8.04..8.36V, Zzt=15Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Z7	-	BZX84C8V2	Z-diode	7.7..8.7V, Zzt=15Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Z7	-	BZX84-C8V2	Z-diode	7.7..8.7V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Z7	-	BZX84C8V2LT1	Z-diode	7.7..8.7V, Zzt=15Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Z7	-	BZX88-C8V2	Z-diode	8.2V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
Z7	-	CZRT55C8V2	Z-diode	7.7..8.7V, Zzt=15Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Z7	-	ELM7647LCB	Vdet-IC	4.7V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
Z7	-	ELM9717CBB	Vdet-IC	1.7V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
Z7	-	KN4F4Z	Si-pnp-Digi	Sw, 60V, 100mA, 150mW, R1=22k	SOT-416	16ta	-	3a	Nec
Z7	-	LBZX84C8V2L	Z-diode	7.7..8.7V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z7	co	BZX84C8V2LT1G	Z-diode	7.7..8.7V, Zzt=15Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Z70	-	BZX84-B16	Z-diode	16V±2.5%, Zzt=40Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z70	-	BZX84B16-V	Z-diode	15.68..16.32V, Zzt=40Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z71	-	BZX84-B18	Z-diode	18V±2.5%, Zzt=45Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z71	-	BZX84B18-V	Z-diode	17.64..18.36V, Zzt=45Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z72	-	BZX84-B20	Z-diode	20V±2.5%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z72	-	BZX84B20-V	Z-diode	19.60..20.40V, Zzt=55Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z72	-	LBZX84B20L	Z-diode	19.52..20.39V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z73	-	BZX84-B22	Z-diode	22V±2.5%, Zzt=55Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z73	-	BZX84B22-V	Z-diode	21.56..22.44V, Zzt=55Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z73	-	LBZX84B22L	Z-diode	21.54..22.47V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z74	-	BZX84-B24	Z-diode	24V±2.5%, Zzt=70Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z74	-	BZX84B24-V	Z-diode	23.52..24.48V, Zzt=70Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z74	-	LBZX84B24L	Z-diode	23.72..24.78V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z75	-	BZX84-B27	Z-diode	27V±2.5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z75	-	BZX84B27-V	Z-diode	26.46..27.54V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z75	-	LBZX84B27L	Z-diode	26.19..27.53V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z76	-	BZX84-B30	Z-diode	30V±2.5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z76	-	BZX84B30-V	Z-diode	29.40..30.60V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z76	-	LBZX84B30L	Z-diode	29.19..30.69V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z77	-	BZX84-B33	Z-diode	33V±2.5%, Zzt=80Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z77	-	BZX84B33-V	Z-diode	32.34..33.66V, Zzt=80Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Z77	-	LBZX84B33L	Z-diode	32.15..33.79V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z78	-	BZX84-B36	Z-diode	36V±2.5%, Zzt=90Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z78	-	BZX84B36-V	Z-diode	35.28..36.72V, Zzt=90Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z78	-	LBZX84B36L	Z-diode	35.07..36.87V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z79	-	BZX84-B39	Z-diode	39V±2.5%, Zzt=130Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z79	-	BZX84B39-V	Z-diode	38.22..39.78V, Zzt=130Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z79	-	LBZX84B39L	Z-diode	38.22..39.78V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z7p	-	BZX84-C8V2	Z-diode	8.2V±5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Z7t	-	BZX84-C8V2	Z-diode	8.2V±5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Z7W	-	BZX84-C8V2	Z-diode	8.2V±5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Z7Z	-	CMSZDA8V2	Z-diode	Dual, 7.7..8.7V, Zzt=15Ω, 21mA, 275mW	SOT-323	16df	-	3a	Cen
Z8	-	BZX84B9V1	Z-diode	8.92..9.28V, Zzt=15Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Z8	-	BZX84C8V2	Z-diode	7.7..8.7V, Zzt=15Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
Z8	-	BZX84C9V1	Z-diode	8.5..9.6V, Zzt=15Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Z8	-	BZX84-C9V1	Z-diode	8.5..9.6V, Zzt=15Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Z8	-	BZX84C9V1LT1	Z-diode	8.5..9.6V, Zzt=15Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Z8	-	BZX88-C9V1	Z-diode	9.1V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
Z8	-	CZRT55C9V1	Z-diode	8.5..9.6V, Zzt=15Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Z8	-	ELM7648LCB	Vdet-IC	4.8V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
Z8	-	ELM9718CBB	Vdet-IC	1.8V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
Z8	-	LBZX84C9V1L	Z-diode	8.5..9.6V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z8	-	NTE5018SM	Z-diode	9.1V±5%, If=250mA, 300mW	SOT-23	16dc	-	3a	Nte
Z8	-	SST308	n-FET	UHF/VHF-Amp/Mix/Osc, 25V, 350mW, Idss=12..60mA, Up<6.5V	SOT-23	16fj	-	3a	Six
Z8	co	BZX84C9V1LT1G	Z-diode	8.5..9.6V, Zzt=15Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Z80	-	BZX84-B43	Z-diode	43V±2.5%, Zzt=150Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z80	-	BZX84B43-V	Z-diode	42.14..43.86V, Zzt=150Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z80	-	LBZX84B43L	Z-diode	42.14..43.86V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z81	-	BZX84-B47	Z-diode	47V±2.5%, Zzt=170Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z81	-	BZX84B47-V	Z-diode	46.06..47.94V, Zzt=170Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z81	-	LBZX84B47L	Z-diode	46.6..47.94V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z82	-	BZX84-B51	Z-diode	51V±2.5%, Zzt=100Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z82	-	BZX84B51-V	Z-diode	49.98..52.02V, Zzt=100Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z82	-	LBZX84B51L	Z-diode	49.98..51.02V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z83	-	BZX84-B56	Z-diode	56V±2.5%, Zzt=135Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z83	-	BZX84B56-V	Z-diode	54.88..57.12V, Zzt=135Ω, Izt=2.5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z84	-	BZX84-B62	Z-diode	62V±2.5%, Zzt=150Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z84	-	BZX84B62-V	Z-diode	60.76..63.24V, Zzt=150Ω, Izt=2.5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z85	-	BZX84-B68	Z-diode	68V±2.5%, Zzt=200Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z85	-	BZX84B68-V	Z-diode	66.64..69.36V, Zzt=200Ω, Izt=2.5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z86	-	BZX84-B75	Z-diode	75V±2.5%, Zzt=250Ω, Izt=2.5mA, 250mW	SOT-23	16dc	-	3a	Nxp
Z86	-	BZX84B75-V	Z-diode	73.50..76.50V, Zzt=250Ω, Izt=2.5mA, 300mW	SOT-23	16dc	-	3g	Vs
Z8p	-	BZX84-C9V1	Z-diode	9.1V±5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Z8t	-	BZX84-C9V1	Z-diode	9.1V±5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Z8W	-	BZX84-C9V1	Z-diode	9.1V±5%, Zzt=15Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Z8Z	-	CMSZDA9V1	Z-diode	Dual, 8.5..9.6V, Zzt=15Ω, 18mA, 275mW	SOT-323	16df	-	3a	Cen
Z9	-	BZX84B10	Z-diode	9.80..10.20V, Zzt=20Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Mco
Z9	-	BZX84C10	Z-diode	9.4..10.6V, Zzt=20Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cen
Z9	-	BZX84-C10	Z-diode	9.4..10.6V, Zzt=20Ω, Izt=5mA, 300mW	SOT-23	16dc	-	3a	Trs
Z9	-	BZX84C10LT1	Z-diode	9.4..10.6V, Zzt=20Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3b	Ons
Z9	-	BZX84C39	Z-diode	37..41V, Zzt=130Ω, Izt=5mA, 225mW	SOT-23	16dc	-	3a	Lge
Z9	-	BZX88-C10	Z-diode	10V±5%, Iz=5mA, 200mW	SOT-23	16dc	-	3a	Fer
Z9	-	CZRT55C10	Z-diode	9.4..10.6V, Zzt=20Ω, Izt=5mA, 350mW	SOT-23	16dc	-	3a	Cmc
Z9	-	ELM7649LCB	Vdet-IC	4.9V±2%, -Reset PPO, 150ms	SOT-23	16vdc	VD7	3d	Elm
Z9	-	ELM9719CBB	Vdet-IC	1.9V±2.5%, +Reset PPO	SOT-23	16vdb	VD7	3d	Elm
Z9	-	LBZX84C10L1	Z-diode	9.4..10.6V, Izt=5mA, 225mW	SOT-23	16dc	-	3c	Lrc
Z9	-	SST309	n-FET	UHF/VHF-Amp/Mix/Osc, 25V, 350mW, Idss=12..30mA, Up<1.4V	SOT-23	16fj	-	3a	Six
Z9	co	BZX84C10LT1G	Z-diode	9.4..10.6V, Zzt=20Ω, Izt=5mA, 225mW, Pb-free	SOT-23	16dc	-	3b	Ons
Z9p	-	BZX84-C10	Z-diode	10V±5%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxH
Z9t	-	BZX84-C10	Z-diode	10V±5%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxM
Z9W	-	BZX84-C10	Z-diode	10V±5%, Zzt=20Ω, Izt=5mA, 250mW	SOT-23	16dc	-	3a	NxC
Z9Z	-	CMSZDA10V	Z-diode	Dual, 9.4..10.6V, Zzt=20Ω, 16mA, 275mW	SOT-323	16df	-	3a	Cen
ZA	-	2N3906S	Si-pnp	GP, 40V, 200mA, 350mW, B=60..300, >250MHz	SOT-23	16ta	-	3f	Kec
ZA	-	2N3906U	Si-pnp	GP, 40V, 200mA, 100mW, B=60..300, >250MHz	USM	18ta	-	3a	Kec
ZA	-	RT9809-27CB	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23	16vdc	VD7	3a	Rct
ZAA	-	KN3906S	Si-pnp	GP, 40V, 200mA, 250mW, B=60..300, >250MHz	SOT-23	16ta	-	3a	Kec
ZB	-	FMMT4123	Si-npn	GP, 40V, 200mA, 350mW B=50..150, >250MHz	SOT-23	16ta	-	3a	Zx
ZB	-	KTN2222S	Si-npn	GP, 60V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3f	Kec
ZB	-	KTN2222U	Si-npn	GP, 60V, 600mA, 330mW, B=120..360, >300MHz	SOT-323	16ta	-	3f	Kec
ZB	-	MAX810SQ270T1G	Vdet-IC	2.70V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZBA	-	KN2222S	Si-npn	GP, 60V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Kec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ZC	-	2N3904S	Si-npn	GP, 60V, 200mA, 350mW, B=100..300, >300MHz	SOT-23	16ta	-	3f	Kec
ZC	-	2SK217-C	n-FET	VHF, 30V, 20mA, 150mA, Idss=2.5..5mA, Up<2.5V	SOT-23	16fk	-	3a	Ren
ZC	-	CHT847BTPT-S	Si-npn	AF, Sw, 45V, 100mA, B=420..800, 200MHz	SOT-416	16ta	-	3a	Chm
ZC	-	FMMT4124	Si-npn	Sw, 30V, 200mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Zx
ZC	-	KST4124	Si-npn	Sw, 30V, 200mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Sam
ZC	-	MAX810SQ400T1G	Vdet-IC	4.0V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZC	-	MMBT4124	Si-npn	Sw, 30V, 200mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Nsc
ZC	-	YTS4124	Si-npn	Sw, 30V, 200mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Tos
ZC-	-	2SC5246	Si-npn	VHF/UHF, 15V, 20mA, 12GHz	SOT-23	16ta	-	3a	Ren
ZCA	-	KN3904S	Si-npn	GP, 60V, 200mA, 250mW, B=100..300, >300MHz	SOT-23	16ta	-	3a	Kec
ZD	-	2SK217-D	n-FET	VHF, 30V, 20mA, 150mA, Idss=4..8mA, Up<2.5V	SOT-23	16fk	-	3a	Ren
ZD	-	FMMT4125	Si-pnp	GP, 30V, 200mA, 350mW, B=50..150, 200MHz	SOT-23	16ta	-	3a	Zx
ZD	-	KST4125	Si-pnp	AF, 30V, 200mA, 350mW, B=50..150, >200MHz	SOT-23	16ta	-	3a	Sam
ZD	-	KTN2907S	Si-pnp	GP, 40V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3f	Kec
ZD	-	KTN2907U	Si-pnp	GP, 40V, 600mA, 330mW, B=100..300, >200MHz	SOT-323	16te	-	3f	Kec
ZD	-	MAX809SQ120T1G	Vdet-IC	1.2V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZD	-	MMBT4125	Si-pnp	GP, 30V, 200mA, 350mW, B=50..150, 200MHz	SOT-23	16ta	-	3a	Sam
ZD-	-	2SC5247	Si-npn	VHF/UHF, 15V, 50mA, 13.5GHz	SOT-23	16ta	-	3a	Ren
ZDA	-	KN2907S	Si-pnp	GP, 40V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Kec
ZE	-	2N5401S	Si-pnp	GP, 150V, 600mA, 350mW, B=60..240, >100MHz	SOT-23	16ta	-	3f	Kec
ZE	-	2SK217-E	n-FET	VHF, 30V, 20mA, 150mA, Idss=6..12mA, Up<2.5V	SOT-23	16fk	-	3a	Ren
ZE	-	FMMT4126	Si-pnp	GP, 25V, 200mA, 350mW, B=120..360, >250MHz	SOT-23	16ta	-	3a	Zx
ZE	-	MAX809SQ232T1G	Vdet-IC	2.32V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZE	-	MMBT4123	Si-npn	GP, 40V, 200mA, 350mW B=50..150, >250MHz	SOT-23	16ta	-	3a	Nsc
ZE-	-	2SK2373	n-MOSFET	V-MOS, LogL, 30V, 200mA, <1.4Ω(10mA), integr, Rgate	SOT-23	16fh	-	3a	Ren
ZE1	-	CHDTA113ZEPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=1k/10k	SOT-416	16ta	-	3a	Chm
ZE2	-	CHDTA143ZEPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/47k	SOT-416	16ta	-	3a	Chm
ZF	-	2N5551S	Si-npn	GP, 160V, 600mA, 350mW, B=80..250, >100MHz	SOT-23	16ta	-	3f	Kec
ZF	-	CZMK3.3	Z-diode	Dual, 4.3V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
ZF	-	MAX809SQ263T1G	Vdet-IC	2.63V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZF	-	MMBT4126	Si-pnp	GP, 25V, 200mA, 350mW, B=120..360, >250MHz	SOT-23	16ta	-	3a	Nsc
ZF	-	TZT3V3CW	Z-diode	Dual, 3.1..3.5V, Izt=5mA, Zzt=95Ω, 300mW	SOT-23	16dg	-	3a	Ttr
ZF-	-	2SJ399	p-MOSFET	V-MOS, LogL, 30V, 0.2A, <7Ω(100mA), integr, Rgate	SOT-23	16fh	-	3a	Ren
ZG	-	BCX70RG	Si-npn	GP, 45V, 100mA, 330mW, B= 120..220, 250MHz	SOT-23	16ta	-	3a	Sil
ZG	-	CZMK3.6	Z-diode	Dual, 4.3V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
ZG	-	KTN2222AS	Si-npn	GP, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3f	Kec
ZG	-	KTN2222AU	Si-npn	GP, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-323	16ta	-	3f	Kec
ZG	-	MAX809SQ293T1G	Vdet-IC	2.93V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZG	-	TZT3V6CW	Z-diode	Dual, 3.4..3.8V, Izt=5mA, Zzt=90Ω, 300mW	SOT-23	16dg	-	3a	Ttr
ZGA	-	KN2222AS	Si-npn	GP, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-23	16ta	-	3a	Kec
ZH	-	BCX70RH	Si-npn	GP, 45V, 200mA, 250mW, B=180..310, >100MHz	SOT-23	16ta	-	3a	Sil
ZH	-	CZMK3.9	Z-diode	Dual, 4.3V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
ZH	-	KTN2907AS	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3f	Kec
ZH	-	KTN2907AU	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-323	16ta	-	3f	Kec
ZH	-	MAX809SQ308T1G	Vdet-IC	3.08V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZH	-	TZT3V9CW	Z-diode	Dual, 3.7..4.1V, Izt=5mA, Zzt=90Ω, 300mW	SOT-23	16dg	-	3a	Ttr
ZHA	-	KN2907AS	Si-pnp	GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-23	16ta	-	3a	Kec
ZI	-	KTN2369S	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120	SOT-23	16ta	-	3f	Kec
ZI	-	MAX809SQ438T1G	Vdet-IC	4.38V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZJ	-	BCX70RJ	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=250..460, >100MHz	SOT-23	16ta	-	3a	Sil
ZJ	-	CZMK4V3	Z-diode	Dual, 4.3V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
ZJ	-	MAX809SQ463T1G	Vdet-IC	4.63V±1.5%, -Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZJ	-	TZT4V3CW	Z-diode	Dual, 4.0..4.6V, Izt=5mA, Zzt=90Ω, 300mW	SOT-23	16dg	-	3a	Ttr
ZJY	-	FM810JP3X	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	F
ZJY	-	UM810JP	Vdet-IC	4.0V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZK	-	BCX70RK	Si-npn	GP, Sw, 45V, 100mA, 250mW, B=380..630, >100MHz	SOT-23	16ta	-	3a	Sie
ZK	-	CZMK4V7	Z-diode	Dual, 4.7V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
ZK	-	KTN2369AS	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120	SOT-23	16ta	-	3f	Kec
ZK	-	KTN2369AU	Si-npn	Sw, 40V, 200mA, 330mW, B=40..120	SOT-323	16ta	-	3f	Kec
ZK	-	MAX809SQ293D1T1G	Vdet-IC	2.93V±1.5%, 1ms, -Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZK	-	TZT4V7CW	Z-diode	Dual, 4.4..5.0V, Izt=5mA, Zzt=80Ω, 300mW	SOT-23	16dg	-	3a	Ttr
ZK-	-	2SJ451	p-MOSFET	V-MOS, LogL, 20V, 0.2A, <3.5Ω(0.1A), integr, Rgate	SOT-23	16fh	-	3a	Ren
ZK1	-	CHDTA113ZKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=1k/10k	SOT-23	16ta	-	3a	Chm
ZK2	-	CHDTA143ZKPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/47k	SOT-23	16ta	-	3a	Chm
ZK3	-	CHDTB113ZKPT	Si-pnp-Digi	Sw, 50V, 500mA, 200MHz, R1/R2=1k/10k	SOT-23	16ta	-	3a	Chm
ZKB	-	CHDTD113ZKPT	Si-npn-Digi	Sw, 50V, 500mA, 200MHz, R1/R2=1k/10k	SOT-23	16ta	-	3a	Chm
ZL	-	2SA1653	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=4.7k/10k	SOT-23	16ta	-	3a	San
ZL	-	CZMK5V1	Z-diode	Dual, 5.1V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
ZL	-	MAX809SQ293D2T1G	Vdet-IC	2.93V±1.5%, 20ms, -Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZL	-	TZT5V1CW	Z-diode	Dual, 4.8..5.4V, Izt=5mA, Zzt=60Ω, 300mW	SOT-23	16dg	-	3a	Ttr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
-ZL	-	PDTA123TT	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=2.2k	SOT-23	16ta	-	3a	NxH
ZL-	-	2SK2570	n-MOSFET	V-MOS, LogL, 20V, 0.2A, <1.1Ω, integr, Rgate	SOT-23	16fh	-	3a	Ren
ZLY	-	FM810LP3X	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	F
ZLY	-	UM810LP	Vdet-IC	4.63V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZM	-	CZMK5V6	Z-diode	Dual, 5.6V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
ZM	-	DDZX26	Z-diode	26V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
ZM	-	MAX809SQ293D3T1G	Vdet-IC	2.93V±1.5%, 100ms, -Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZM	-	TZT5V6CW	Z-diode	Dual, 5.2..6.0V, Izt=5mA, Zzt=40Ω, 300mW	SOT-23	16dg	-	3a	Ttr
-ZM	-	PDTC123TT	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=2.2k	SOT-23	16ta	-	3a	NxH
ZM-	-	2SJ452	p-MOSFET	V-MOS, LogL, 50V, 0.2A, <7Ω(0.1A), integr, Rgate	SOT-23	16fh	-	3a	Ren
ZMY	-	FM810MP3X	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	F
ZMY	-	UM810MP	Vdet-IC	4.38V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZN	-	2N5400S	Si-pnp	GP, 120V, 600mA, 350mW, B=40..180, >100MHz	SOT-23	16ta	-	3f	Kec
ZN	-	CZMK6V2	Z-diode	Dual, 6.2V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
ZN	-	MAX810SQ120T1G	Vdet-IC	1.20V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZN	-	TZT6V2CW	Z-diode	Dual, 5.8..6.6V, Izt=5mA, Zzt=10Ω, 300mW	SOT-23	16dg	-	3a	Ttr
ZN-	-	2SK2569	n-MOSFET	V-MOS, LogL, 50V, 0.2A, <2.6Ω(0.1A), integr, Rgate	SOT-23	16fh	-	3a	Ren
ZO	-	2SA1182-O	Si-pnp	AF, 35V, 500mA, 150mW, B=70..140, 200MHz	SOT-23	16ta	-	3a	Tos
ZO	-	2SA1588-O	Si-pnp	AF-Drv, Sw, 35V, 500mA, 100mW, B=70..140, 200MHz	SOT-323	16ta	-	3a	Tos
ZO	-	KTA2015-O	Si-pnp	AF, Sw, 35V, 500mA, 100mW, B=40..120, 200MHz	USM	16ta	-	3f	Kec
ZO	-	MAX810SQ263T1G	Vdet-IC	2.63V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZOP	-	STZ6.8T	Z-diode	Dual, 6.47..7.14V, Zzt<40Ω(5mA), 100mW	SOT-346	16df	-	3a	Rhm
ZP	-	2N5550S	Si-npn	GP, 140V, 600mA, 350mW, B=60..250, >100MHz	SOT-23	16ta	-	3f	Kec
ZP	-	CZMK6V8	Z-diode	Dual, 6.8V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
ZP	-	MAX810SQ293T1G	Vdet-IC	2.93V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZP	-	TZT6V8CW	Z-diode	Dual, 6.4..7.2V, Izt=5mA, Zzt=15Ω, 300mW	SOT-23	16dg	-	3a	Ttr
ZQ	-	2PC4081Q	Si-npn	GP, 50V, 100mA, 200mW, B=120..270, >100MHz	SOT-323	16ta	-	3a	PhH
ZQ	-	2PC4617Q	Si-npn	GP, 50V, 100mA, 150mW, >100MHz, B=120..270	SOT-416	16ta	-	3a	Phi
ZQ	-	2PC4617QJ	Si-npn	GP, 50V, 100mA, 250mW, >100MHz, B=120..270	SOT-490	18ta	-	3a	Phi
ZQ	-	2PD601AQ	Si-npn	GP, Sw, 60V, 100mA, 250mW, B=160..260, >100MHz	SC-59	16ta	-	3a	Phi
ZQ	-	2SD1819A-Q	Si-npn	GP, 60V, 200mA, 150mW, 150MHz, B=160..260	SOT-323	16ta	-	3a	Pan
ZQ	-	2SD2496-Q	Si-npn	GP, 60V, 100mA, 150MHz, B=60..120	SOT-23	16ta	-	3a	Pan
ZQ	-	2SD601A-Q	Si-npn	GP, AF, 60V, 600mA, B=160..260, 150MHz	SC-59	16ta	-	3a	Pan
ZQ	-	DDZX36	Z-diode	36V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
ZQ	-	MAX810SQ438T1G	Vdet-IC	4.38V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZQw	-	2PC4081Q	Si-npn	GP, 50V, 100mA, 200mW, B=120..270, >100MHz	SOT-323	16ta	-	3a	PhC
ZR	-	2PC4081R	Si-npn	GP, 50V, 100mA, 200mW, B=180..390, >100MHz	SOT-323	16ta	-	3a	PhH
ZR	-	2PC4617R	Si-npn	GP, 50V, 100mA, 150mW, >100MHz, B=180..390	SOT-416	16ta	-	3a	Phi
ZR	-	2PC4617RJ	Si-npn	GP, 50V, 100mA, 250mW, >100MHz, B=180..390	SOT-490	18ta	-	3a	Phi
ZR	-	2PD601AR	Si-npn	GP, Sw, 60V, 100mA, 250mW, B=210..340, >120MHz	SC-59	16ta	-	3a	Phi
ZR	-	2SD1819A-R	Si-npn	GP, 60V, 200mA, 150mW, 150MHz, B=210..340	SOT-323	16ta	-	3a	Pan
ZR	-	2SD2496-R	Si-npn	GP, 60V, 100mA, 150MHz, B=90..180	SOT-23	16ta	-	3a	Pan
ZR	-	2SD601A-R	Si-npn	GP, AF, 60V, 600mA, B=210..340, 150MHz	SC-59	16ta	-	3a	Pan
ZR	-	CAT809ZTBI-GT3	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23	16vdc	VD7	3b	Ons
ZR	-	DDZX43	Z-diode	43V±2.5%, If=10mA, 500mW	SOT-23	16dc	-	3a	Di
ZR	-	MAX810SQ463T1G	Vdet-IC	4.63V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZR	-	MSD1819A-R	Si-npn	GP, 60V, 100mA, 150mW, B=210..340	SOT-323	16ta	-	3a	Mot
ZRA	-	KN3903S	Si-npn	GP, 60V, 200mA, 250mW, B=50..150, >300MHz	SOT-23	16ta	-	3a	Kec
ZRK	-	UM810XP	Vdet-IC	2.8V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZRM	-	UM810WP	Vdet-IC	3.0V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZRN	-	UM810YP	Vdet-IC	2.7V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZRQ	-	UM810AAP	Vdet-IC	2.5V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZRR	-	UM810ABP	Vdet-IC	2.4V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZRT	-	UM810ACP	Vdet-IC	2.2V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZRw	-	2PC4081R	Si-npn	GP, 50V, 100mA, 200mW, B=180..390, >100MHz	SOT-323	16ta	-	3a	PhC
ZRY	-	FM810RP3X	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	F
ZRY	-	UM810RP	Vdet-IC	2.63V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZS	-	2PC4081S	Si-npn	GP, 50V, 100mA, 200mW, B=270..560, >100MHz	SOT-323	16ta	-	3a	PhH
ZS	-	2PC4617S	Si-npn	GP, 50V, 100mA, 150mW, >100MHz, B=270..560	SOT-416	16ta	-	3a	Phi
ZS	-	2PC4617SJ	Si-npn	GP, 50V, 100mA, 250mW, >100MHz, B=270..560	SOT-490	18ta	-	3a	Phi
ZS	-	2PD601AS	Si-npn	GP, Sw, 60V, 100mA, 250mW, B=290..460, >140MHz	SC-59	16ta	-	3a	Phi
ZS	-	2SD1819A-S	Si-npn	GP, 60V, 200mA, 150mW, 150MHz, B=290..460	SOT-323	16ta	-	3a	Pan
ZS	-	2SD2496-S	Si-npn	GP, 60V, 100mA, 150MHz, B=120..240	SOT-23	16ta	-	3a	Pan
ZS	-	2SD601A-S	Si-npn	GP, AF, 60V, 600mA, B=290..460, 150MHz	SC-59	16ta	-	3a	Pan
ZS	-	CAT810ZSDI-GT3	Vdet-IC	2.32V±1.5%, +Reset PPO	SC-70	16vdc	VD7	3d	Ons
ZS	-	CAT810ZTBI-GT3	Vdet-IC	2.32V±1.5%, +Reset PPO	SOT-23	16vdc	VD7	3b	Ons
ZS	-	MAX810SQ293D1T1G	Vdet-IC	2.93V±1.5%, 1ms, +Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZS	-	MSD1819A-S	Si-npn	GP, 60V, 100mA, 150mW, B=290..460	SOT-323	16ta	-	3a	Mot
ZS1	-	ZHCS1000	Si-diode	Schottky, 30V, 1A, Vf<0.5V(1)	SOT-23	16dc	-	3a	Zx
ZS2	-	ZHCS2000	Si-diode	Schottky, 40V, 2A	SOT-23	16dc	-	3a	Zx

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ZS5	-	ZHCS500	Si-diode	Schottky, 40V, 500mA, Vf<0.55V(500mA)	SOT-23	16dc	-	3a	Zx
ZS7	-	ZHCS750	Si-diode	Schottky, 30V, 750mA, Vf<0.54V(750mA)	SOT-23	16dc	-	3a	Zx
ZSA	-	KN3905S	Si-pnp	GP, Sw, 40V, 200mA, 250mW, B=30..150, 200MHz	SOT-23	16ta	-	3f	Kec
ZSJ	-	UM810IP	Vdet-IC	3.9V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZSK	-	UM810KP	Vdet-IC	3.8V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZSL	-	UM810HP	Vdet-IC	4.1V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZSN	-	UM810NP	Vdet-IC	3.7V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZSP	-	UM810OP	Vdet-IC	3.6V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZSQ	-	UM810PP	Vdet-IC	3.5V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZSR	-	UM810QP	Vdet-IC	3.4V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZSS	-	UM810UP	Vdet-IC	3.3V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZST	-	UM810VP	Vdet-IC	3.2V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZSw	-	2PC4081S	Si-npn	GP, 50V, 100mA, 200mW, B=270..560, >100MHz	SOT-323	16ta	-	3a	PhC
ZSY	-	FM810SP3X	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	F
ZSY	-	UM810SP	Vdet-IC	2.93V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZT	-	CZMK7V5	Z-diode	Dual, 7.5V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
ZT	-	MAX810SQ293D2T1G	Vdet-IC	2.93V±1.5%, 20ms, +Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZT	-	TZT7V5CW	Z-diode	Dual, 7.0..7.9V, Izt=5mA, Zzt=15Ω, 300mW	SOT-23	16dg	-	3a	Ttr
ZTA	-	KN4400S	Si-npn	GP, Sw, 60V, 600mA, 350mW, B=50..150, 200MHz	SOT-23	16ta	-	3f	Kec
ZTJ	-	UM810BP	Vdet-IC	4.9V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZTK	-	UM810CP	Vdet-IC	4.8V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZTM	-	UM810AP	Vdet-IC	5.0V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZTN	-	UM810DP	Vdet-IC	4.7V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZtQ	-	2PC4081Q	Si-npn	GP, 50V, 100mA, 200mW, B=120..270, >100MHz	SOT-323	16ta	-	3a	PhM
ZTQ	-	UM810EP	Vdet-IC	4.5V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZtR	-	2PC4081R	Si-npn	GP, 50V, 100mA, 200mW, B=180..390, >100MHz	SOT-323	16ta	-	3a	PhM
ZtS	-	2PC4081S	Si-npn	GP, 50V, 100mA, 200mW, B=270..560, >100MHz	SOT-323	16ta	-	3a	PhM
ZTS	-	UM810FP	Vdet-IC	4.3V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZTT	-	UM810GP	Vdet-IC	4.2V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZTY	-	FM810TP3X	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-323	16vdc	VD7	3a	F
ZTY	-	UM810TP	Vdet-IC	3.08V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZU	-	MAX810SQ293D3T1G	Vdet-IC	2.93V±1.5%, 100ms, +Reset PPO	SC-70	16vdc	VD7	3b	Ons
ZU-	-	2SJ486	p-MOSFET	V-MOS, LogL, 30V, 0.3A, <0.65Ω, integr, Rgate	SOT-23	16fh	-	3a	Ren
ZU1	-	CHDTA143ZUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=4.7k/47k	SOT-323	16ta	-	3a	Chm
ZU2	-	CHDTA113ZUPT	Si-pnp-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=1k/10k	SOT-323	16ta	-	3a	Chm
ZUA	-	CHDTC113ZUPT	Si-npn-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=1k/2k	SOT-323	16ta	-	3a	Chm
ZUA	-	KN4401S	Si-npn	GP, Sw, 60V, 600mA, 350mW, B=100..300, 250MHz	SOT-23	16ta	-	3f	Kec
ZUB	-	CHDTD113ZUPT	Si-npn-Digi	Sw, 50V, 500mA, 200MHz, R1/R2=1k/10k	SOT-323	16ta	-	3a	Chm
ZV	-	CZMK8V2	Z-diode	Dual, 8.2V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
ZV	-	TZT8V2CW	Z-diode	Dual, 7.7..8.7V, Izt=5mA, Zzt=15Ω, 300mW	SOT-23	16dg	-	3a	Ttr
ZV-	-	2SK2802	n-MOSFET	V-MOS, LogL, 30V, 0.5A, <0.28Ω, integr, Rgate	SOT-23	16fh	-	3a	Ren
ZVA	-	KN4402S	Si-pnp	GP, Sw, 40V, 600mA, 350mW, B=50..150, 250MHz	SOT-23	16ta	-	3f	Kec
ZW	-	CZMK9V1	Z-diode	Dual, 9.1V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
ZW	-	TZT9V1CW	Z-diode	Dual, 8.5..9.6V, Izt=5mA, Zzt=15Ω, 300mW	SOT-23	16dg	-	3a	Ttr
ZWA	-	KN4403S	Si-pnp	GP, Sw, 40V, 600mA, 350mW, B=100..300, 250MHz	SOT-23	16ta	-	3f	Kec
ZX	-	CZMK10	Z-diode	Dual, 10V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
ZX	-	TZT10CW	Z-diode	Dual, 9.4..10.6V, Izt=5mA, Zzt=20Ω, 300mW	SOT-23	16dg	-	3a	Ttr
ZY	-	2SA1182-Y	Si-pnp	AF, 35V, 500mA, 150mW, B=120..240, 200MHz	SOT-23	16ta	-	3a	Tos
ZY	-	2SA1588-Y	Si-pnp	AF-Drv, Sw, 35V, 500mA, 100mW, B=120..240, 200MHz	SOT-323	16ta	-	3a	Tos
ZY	-	2SC4047	Si-npn-Digi	Sw, 50V, 100mA, 200mW, 250MHz, B>70, R1/R2=10k/47k	CP	16ta	-	3a	San
ZY	-	CZMK11	Z-diode	Dual, 11V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
ZY	-	KTA2015-Y	Si-pnp	AF, Sw, 35V, 500mA, 100mW, B=120..240, 200MHz	USM	16ta	-	3f	Kec
ZY	-	TZT11CW	Z-diode	Dual, 10.4..11.6V, Izt=5mA, Zzt=20Ω, 300mW	SOT-23	16dg	-	3a	Ttr
ZY-	-	2SK3000	n-MOSFET	V-MOS, LogL, 40V, 1A, <0.5Ω(0.45A), In, Rgate	SOT-23	16fh	-	3a	Ren
ZZ	-	CZMK12	Z-diode	Dual, 12V±5%, Izt=5mA, 300mW	SOT-23	16dg	-	3a	Cdi
ZZ	-	TZT12CW	Z-diode	Dual, 11.4..12.7V, Izt=5mA, Zzt=25Ω, 300mW	SOT-23	16dg	-	3a	Ttr
ZZ-	-	2SK2980	n-MOSFET	V-MOS, LogL, 30V, 1A, <0.28Ω(0.5A)	MPAK	16fh	-	3a	Ren
ZZ1	-	CMPZDA4V7	Z-diode	Dual, 4.7V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
ZZ2	-	CMPZDA5V1	Z-diode	Dual, 5.1V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
ZZ3	-	CMPZDA5V6	Z-diode	Dual, 5.6V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
ZZ4	-	CMPZDA6V2	Z-diode	Dual, 6.2V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
ZZ5	-	CMPZDA6V8	Z-diode	Dual, 6.8V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
ZZ6	-	CMPZDA7V5	Z-diode	Dual, 7.5V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
ZZ7	-	CMPZDA8V2	Z-diode	Dual, 8.2V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
ZZ8	-	CMPZDA9V1	Z-diode	Dual, 9.1V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
ZZ9	-	CMPZDA10V	Z-diode	Dual, 10V±2.5%, If=10mA, 350mW	SOT-23	16df	-	3a	Cen
ZZL	-	UM810ADP	Vdet-IC	2.1V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZZM	-	UM810AEP	Vdet-IC	2.0V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns
ZZR	-	HWD809REX	Vdet-IC	2.63V±2%, -Reset PPO	SC-70	16vdc	VD7	3a	Csm
ZZY	-	UM810ZP	Vdet-IC	2.32V±1%, +Reset PPO	SC-70-3	16vdc	VD7	3c	Uns



SECTION 4

SOT-223 case SMD semiconductor components



0
1
2
3
4
5
6
7
8
9
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
01N60C3	-	SPN01N60C3	n-MOSFET	HV, LogL, 650V, 300mA, 1.8W, 5.5Ω(500mA), 45/60ns	SOT-223	21f2	-	4k	Inf
02N60C3	-	SPN02N60C3	n-MOSFET	HV, LogL, 600V, 400mA, 1.8W, 2.0Ω(1.1A), 6/68ns	SOT-223	21f2	-	4k	Inf
02N60S5	-	SPN02N60S5	n-MOSFET	HV, LogL, 600V, 400mA, 1.8W, 2.5Ω(1.1A), 30/110ns	SOT-223	21f2	-	4k	Inf
03N60C3	-	SPN03N60C3	n-MOSFET	HV, LogL, 650V, 700mA, 1.8W, 1.2Ω(2A), 7/64ns	SOT-223	21f2	-	4k	Inf
03N60S5	-	SPN03N60S5	n-MOSFET	HV, LogL, 600V, 700mA, 1.8W, 1.2Ω(2A), 35/120ns	SOT-223	21f2	-	4k	Inf
0410	-	SSM0410	n-MOSFET	Sw, 100V, 3.5A, 2.7W, Rds=220mΩ(2.6A), 9/26.8ns	SOT-223	21fi	-	4rb	Sec
04N60S5	-	SPN04N60S5	n-MOSFET	HV, LogL, 600V, 800mA, 1.8W, 0.8Ω(2.8A), 40/130ns	SOT-223	21f2	-	4k	Inf
103MN	-	Z0103MN	Triac	600V, 1A, 1W, Vtm<1.56V, <Igt>3mA	SOT-223	21hz	-	4s	Ons
107MN	-	Z0107MN	Triac	600V, 1A, 1W, Vtm<1.56V, Igt>5mA	SOT-223	21hz	-	4s	Ons
109MN	-	Z0109MN	Triac	600V, 1A, 1W, Vtm<1.56V, Igt>10mA	SOT-223	21hz	-	4s	Ons
1116	-	SL1116VADJ	LVR-IC	LDO, Adjustable 1.25..13.8V, 600mA	SOT-223	21cn	VR20	4rb	Sec
111615	-	SL1116-1.5V	LVR-IC	LDO, 1.5V±1%, 600mA	SOT-223	21cg	VR1	4rb	Sec
111618	-	SL1116-1.8V	LVR-IC	LDO, 1.8V±1%, 600mA	SOT-223	21cg	VR1	4rb	Sec
111625	-	SL1116-2.5V	LVR-IC	LDO, 2.5V±1%, 600mA	SOT-223	21cg	VR1	4rb	Sec
111633	-	SL1116-3.3V	LVR-IC	LDO, 3.3V±1%, 600mA	SOT-223	21cg	VR1	4rb	Sec
111650	-	SL1116-5.0V	LVR-IC	LDO, 5.0V±1%, 600mA	SOT-223	21cg	VR1	4rb	Sec
1117	-	LT1117CST	LVR-IC	LDO, Adjustable 1.5..15V, 800mA	SOT-223	21wc	VR20	4r	Ltc
11172	-	LT1117CST-2.85	LVR-IC	LDO, 2.85V±1%V, 800mA	SOT-223	21wb	VR1	4r	Ltc
11173	-	LT1117CST-3.3	LVR-IC	LDO, 3.3V±1%, 800mA	SOT-223	21wb	VR1	4r	Ltc
11175	-	LT1117CST-5	LVR-IC	LDO, 5.0V±1%, 800mA	SOT-223	21wb	VR1	4r	Ltc
1117C1.2	-	LM1117S-1.2V	LVR-IC	LDO, 1.2V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117C1.5	-	LM1117S-1.5V	LVR-IC	LDO, 1.5V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117C1.8	-	LM1117S-1.8V	LVR-IC	LDO, 1.8V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117C2.5	-	LM1117S-2.5V	LVR-IC	LDO, 2.5V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117C2.85	-	LM1117S-2.85V	LVR-IC	LDO, 2.85V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117C3.3	-	LM1117S-3.3V	LVR-IC	LDO, 3.3V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117C5.0	-	LM1117S-5.0V	LVR-IC	LDO, 5.0V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117CADJ	-	LM1117S-ADJ	LVR-IC	LDO, Adjustable 1.25..13.8V, 1A	SOT-223	21cn	VR20	4r	Htc
1117GC1.2	-	LM1117GS-1.2V	LVR-IC	LDO, 1.2V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117GC1.5	-	LM1117GS-1.5V	LVR-IC	LDO, 1.5V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117GC1.8	-	LM1117GS-1.8V	LVR-IC	LDO, 1.8V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117GC2.5	-	LM1117GS-2.5V	LVR-IC	LDO, 2.5V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117GC2.85	-	LM1117GS-2.85V	LVR-IC	LDO, 2.85V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117GC3.3	-	LM1117GS-3.3V	LVR-IC	LDO, 3.3V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117GC5.0	-	LM1117GS-5.0V	LVR-IC	LDO, 5.0V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117GCADJ	-	LM1117GS-ADJ	LVR-IC	LDO, Adjustable 1.25..13.8V, 1A	SOT-223	21cn	VR20	4r	Htc
1117Q1.2	-	LM1117QS-1.2V	LVR-IC	LDO, 1.2V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117Q1.5	-	LM1117QS-1.5V	LVR-IC	LDO, 1.5V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117Q1.8	-	LM1117QS-1.8V	LVR-IC	LDO, 1.8V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117Q2.5	-	LM1117QS-2.5V	LVR-IC	LDO, 2.5V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117Q2.85	-	LM1117QS-2.85V	LVR-IC	LDO, 2.85V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117Q3.3	-	LM1117QS-3.3V	LVR-IC	LDO, 3.3V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117Q5.0	-	LM1117QS-5.0V	LVR-IC	LDO, 5.0V±1%, 1A	SOT-223	21cg	VR1	4r	Htc
1117QADJ	-	LM1117QS-ADJ	LVR-IC	LDO, Adjustable 1.25..13.8V, 1A	SOT-223	21cn	VR20	4r	Htc
1118	-	SL1118ADJ	LVR-IC	LDO, Adjustable 0.8..5.0V±2%, 800mA	SOT-223	21cn	VR20	4rb	Sec
111815	-	SL1118-1.5	LVR-IC	LDO, 1.5V±2%, 800mA	SOT-223	21cg	VR1	4rb	Sec
111818	-	SL1118-1.8	LVR-IC	LDO, 1.8V±2%, 800mA	SOT-223	21cg	VR1	4rb	Sec
111825	-	SL1118-2.5	LVR-IC	LDO, 2.5V±2%, 800mA	SOT-223	21cg	VR1	4rb	Sec
111833	-	SL1118-3.3	LVR-IC	LDO, 3.3V±2%, 800mA	SOT-223	21cg	VR1	4rb	Sec
111850	-	SL1118-5.0	LVR-IC	LDO, 5.0V±2%, 800mA	SOT-223	21cg	VR1	4rb	Sec
117-2	-	NCP1117ST20T3	LVR-IC	LDO, 2.0V±1%, 800mA	SOT-223	21wb	VR1	4s	Ons
117-2V	-	NCV1117ST20T3	LVR-IC	LDO, 2.0V±1%, 800mA	SOT-223	21wb	VR1	4s	Ons
117-5	-	NCP1117ST50T3	LVR-IC	LDO, 5.0V±1%, 800mA	SOT-223	21wb	VR1	4s	Ons
117-5V	-	NCV1117ST50T3	LVR-IC	LDO, 5.0V±1%, 800mA	SOT-223	21wb	VR1	4s	Ons
117-A	-	NCP1117STAT3	LVR-IC	LDO, Adjustable 2..12V, 800mA	SOT-223	21wc	VR20	4s	Ons
117-AV	-	NCV1117STAT3	LVR-IC	LDO, Adjustable 2..12V, 800mA	SOT-223	21wc	VR20	4s	Ons
157	-	PZT157	Si-pnp	AF, Sw, 80V, 3A, 2W, B=100..300, 140MHz	SOT-223	21tm	-	4rb	Sec
158	-	PZT158	Si-npn	AF, Sw, 150V, 3A, 3W, B=100..300, 130MHz	SOT-223	21tm	-	4rb	Sec
159	-	PZT159	Si-pnp	AF, Sw, 100V, 5A, 3W, B=100..300, 120MHz	SOT-223	21tm	-	4rb	Sec
17-12	-	NCP1117ST12T3	LVR-IC	LDO, 12V±1%, 800mA	SOT-223	21wb	VR1	4s	Ons
17-12V	-	NCV1117ST12T3	LVR-IC	LDO, 12V±1%, 800mA	SOT-223	21wb	VR1	4s	Ons
17-15	-	NCP1117ST15T3	LVR-IC	LDO, 1.5V±1%, 800mA	SOT-223	21wb	VR1	4s	Ons
17-15V	-	NCV1117ST15T3	LVR-IC	LDO, 1.5V±1%, 800mA	SOT-223	21wb	VR1	4s	Ons
17-18	-	NCP1117ST18T3	LVR-IC	LDO, 1.8V±1%, 800mA	SOT-223	21wb	VR1	4s	Ons
17-18V	-	NCV1117ST18T3	LVR-IC	LDO, 1.8V±1%, 800mA	SOT-223	21wb	VR1	4s	Ons
17-25	-	NCP1117ST25T3	LVR-IC	LDO, 2.5V±1%, 800mA	SOT-223	21wb	VR1	4s	Ons
17-25V	-	NCV1117ST25T3	LVR-IC	LDO, 2.5V±1%, 800mA	SOT-223	21wb	VR1	4s	Ons
17-33	-	NCP1117ST33T3	LVR-IC	LDO, 3.3V±1%, 800mA	SOT-223	21wb	VR1	4s	Ons
17-33V	-	NCV1117ST33T3	LVR-IC	LDO, 3.3V±1%, 800mA	SOT-223	21wb	VR1	4s	Ons
1824S08	-	MCP1824ST-0802E/DB	LVR-IC	LDO, 0.8V±2%, 300mA	SOT-223	21eu	VR1	4wa	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1824S12	-	MCP1824ST-1202E/DB	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-223	21eu	VR1	4wa	Mcc
1824S18	-	MCP1824ST-1802E/DB	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-223	21eu	VR1	4wa	Mcc
1824S25	-	MCP1824ST-2502E/DB	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-223	21eu	VR1	4wa	Mcc
1824S30	-	MCP1824ST-3002E/DB	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-223	21eu	VR1	4wa	Mcc
1824S33	-	MCP1824ST-3302E/DB	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-223	21eu	VR1	4wa	Mcc
1824S50	-	MCP1824ST-5002E/DB	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-223	21eu	VR1	4wa	Mcc
1826S08	-	MCP1826ST-0802E/DB	LVR-IC	LDO, 0.8V±2%, 1A	SOT-223	21eu	VR1	4wa	Mcc
1826S12	-	MCP1826ST-1202E/DB	LVR-IC	LDO, 1.2V±2%, 1A	SOT-223	21eu	VR1	4wa	Mcc
1826S18	-	MCP1826ST-1802E/DB	LVR-IC	LDO, 1.8V±2%, 1A	SOT-223	21eu	VR1	4wa	Mcc
1826S25	-	MCP1826ST-2502E/DB	LVR-IC	LDO, 2.5V±2%, 1A	SOT-223	21eu	VR1	4wa	Mcc
1826S30	-	MCP1826ST-3002E/DB	LVR-IC	LDO, 3.0V±2%, 1A	SOT-223	21eu	VR1	4wa	Mcc
1826S33	-	MCP1826ST-3302E/DB	LVR-IC	LDO, 3.3V±2%, 1A	SOT-223	21eu	VR1	4wa	Mcc
1826S50	-	MCP1826ST-5002E/DB	LVR-IC	LDO, 5.0V±2%, 1A	SOT-223	21eu	VR1	4wa	Mcc
194	-	PZT194	Si-npn	AF, 80V, 1A, 2W, B=100..300, 150MHz	SOT-223	21tm	-	4rb	Sec
195	-	PZT195	Si-pnp	AF, Sw, 80V, 1A, 2W, B=100..300, 150MHz	SOT-223	21tm	-	4rb	Sec
1AM	-	PZT3904	Si-npn	Sw, 60V, 100mA, 1.2W, B=100..300, >300MHz	SOT-223	21tm	-	4s	Ons
1C200	-	NSS1C200MZ4	Si-npn	GP, 100V, 2A, 2W, B=150..360, 120MHz	SOT-223	21tm	-	4s	Ons
1N10	-	MMFT1N10E	n-MOSFET	V-MOS, 100V, 1A, <0.25Ω(500mA)	SOT-223	21f2	-	4s	Mot
24K	-	XC6202P182FR	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
24L	-	XC6202P192FR	LVR-IC	LDO, 1.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
24M	-	XC6202P202FR	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
24M	-	XC6216D202FR	LVR-IC	2.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
24N	-	XC6202P212FR	LVR-IC	LDO, 2.1V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
24N	-	XC6216D212FR	LVR-IC	2.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
24P	-	XC6202P222FR	LVR-IC	LDO, 2.2V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
24P	-	XC6216D222FR	LVR-IC	2.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
24R	-	XC6202P232FR	LVR-IC	LDO, 2.3V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
24R	-	XC6216D232FR	LVR-IC	2.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
24S	-	XC6202P242FR	LVR-IC	LDO, 2.4V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
24S	-	XC6216D242FR	LVR-IC	2.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
24T	-	XC6202P252FR	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
24T	-	XC6216D252FR	LVR-IC	2.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
24U	-	XC6202P262FR	LVR-IC	LDO, 2.6V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
24U	-	XC6216D262FR	LVR-IC	2.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
24V	-	XC6202P272FR	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
24V	-	XC6216D272FR	LVR-IC	2.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
24X	-	XC6202P282FR	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
24X	-	XC6216D282FR	LVR-IC	2.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
24Y	-	XC6202P292FR	LVR-IC	LDO, 2.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
24Y	-	XC6216D292FR	LVR-IC	2.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
24Z	-	XC6202P302FR	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
24Z	-	XC6216D302FR	LVR-IC	3.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
250	-	XC6202P312FR	LVR-IC	LDO, 3.1V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
250	-	XC6216D312FR	LVR-IC	3.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
251	-	XC6202P322FR	LVR-IC	LDO, 3.2V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
251	-	XC6216D322FR	LVR-IC	3.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
252	-	XC6202P332FR	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
252	-	XC6216D332FR	LVR-IC	3.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
253	-	XC6202P342FR	LVR-IC	LDO, 3.4V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
253	-	XC6216D342FR	LVR-IC	3.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
254	-	XC6202P352FR	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
254	-	XC6216D352FR	LVR-IC	3.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
255	-	XC6202P362FR	LVR-IC	LDO, 3.6V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
255	-	XC6216D362FR	LVR-IC	3.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
256	-	XC6202P372FR	LVR-IC	LDO, 3.7V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
256	-	XC6216D372FR	LVR-IC	3.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
257	-	XC6202P382FR	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
257	-	XC6216D382FR	LVR-IC	3.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
258	-	XC6202P392FR	LVR-IC	LDO, 3.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
258	-	XC6216D392FR	LVR-IC	3.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
259	-	XC6202P402FR	LVR-IC	LDO, 4.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
259	-	XC6216D402FR	LVR-IC	4.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25A	-	XC6202P412FR	LVR-IC	LDO, 4.1V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25A	-	XC6216D412FR	LVR-IC	4.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25B	-	XC6202P422FR	LVR-IC	LDO, 4.2V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25B	-	XC6216D422FR	LVR-IC	4.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25C	-	XC6202P432FR	LVR-IC	LDO, 4.3V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25C	-	XC6216D432FR	LVR-IC	4.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25D	-	XC6202P442FR	LVR-IC	LDO, 4.4V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25D	-	XC6216D442FR	LVR-IC	4.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
25E	-	XC6202P452FR	LVR-IC	LDO, 4.5V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25E	-	XC6216D452FR	LVR-IC	4.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25F	-	XC6202P462FR	LVR-IC	LDO, 4.6V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25F	-	XC6216D462FR	LVR-IC	4.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25H	-	XC6202P472FR	LVR-IC	LDO, 4.7V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25H	-	XC6216D472FR	LVR-IC	4.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25K	-	XC6202P482FR	LVR-IC	LDO, 4.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25K	-	XC6216D482FR	LVR-IC	4.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25L	-	XC6202P492FR	LVR-IC	LDO, 4.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25L	-	XC6216D492FR	LVR-IC	4.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25M	-	XC6202P502FR	LVR-IC	LDO, 5.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25M	-	XC6216D502FR	LVR-IC	5.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25N	-	XC6202P512FR	LVR-IC	LDO, 5.1V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25N	-	XC6216D512FR	LVR-IC	5.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25P	-	XC6202P522FR	LVR-IC	LDO, 5.2V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25P	-	XC6216D522FR	LVR-IC	5.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25R	-	XC6202P532FR	LVR-IC	LDO, 5.3V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25R	-	XC6216D532FR	LVR-IC	5.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25S	-	XC6202P542FR	LVR-IC	LDO, 5.4V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25S	-	XC6216D542FR	LVR-IC	5.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25T	-	XC6202P552FR	LVR-IC	LDO, 5.5V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25T	-	XC6216D552FR	LVR-IC	5.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25U	-	XC6202P562FR	LVR-IC	LDO, 5.6V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25U	-	XC6216D562FR	LVR-IC	5.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25V	-	XC6202P572FR	LVR-IC	LDO, 5.7V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25V	-	XC6216D572FR	LVR-IC	5.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25X	-	XC6202P582FR	LVR-IC	LDO, 5.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25X	-	XC6216D582FR	LVR-IC	5.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25Y	-	XC6202P592FR	LVR-IC	LDO, 5.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25Y	-	XC6216D592FR	LVR-IC	5.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
25Z	-	XC6202P602FR	LVR-IC	LDO, 6.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
25Z	-	XC6216D602FR	LVR-IC	6.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
260	-	XC6202P612FR	LVR-IC	LDO, 6.1V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
260	-	XC6216D612FR	LVR-IC	6.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
261	-	XC6202P622FR	LVR-IC	LDO, 6.2V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
261	-	XC6216D622FR	LVR-IC	6.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
262	-	XC6202P632FR	LVR-IC	LDO, 6.3V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
262	-	XC6216D632FR	LVR-IC	6.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
263	-	XC6202P642FR	LVR-IC	LDO, 6.4V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
263	-	XC6216D642FR	LVR-IC	6.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
264	-	XC6202P652FR	LVR-IC	LDO, 6.5V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
264	-	XC6216D652FR	LVR-IC	6.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
265	-	XC6202P662FR	LVR-IC	LDO, 6.6V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
265	-	XC6216D662FR	LVR-IC	6.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
266	-	XC6202P672FR	LVR-IC	LDO, 6.7V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
266	-	XC6216D672FR	LVR-IC	6.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
267	-	XC6202P682FR	LVR-IC	LDO, 6.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
267	-	XC6216D682FR	LVR-IC	6.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
268	-	XC6202P692FR	LVR-IC	LDO, 6.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
268	-	XC6216D692FR	LVR-IC	6.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
269	-	XC6202P702FR	LVR-IC	LDO, 7.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
269	-	XC6216D702FR	LVR-IC	7.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
2693	-	MC33269ST-3.3T3	LVR-IC	LDO, 3.3V±2%, 800mA	SOT-223	21cg	VR1	4s	Ons
26A	-	XC6202P712FR	LVR-IC	LDO, 7.1V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26A	-	XC6216D712FR	LVR-IC	7.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26B	-	XC6202P722FR	LVR-IC	LDO, 7.2V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26B	-	XC6216D722FR	LVR-IC	7.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26C	-	XC6202P732FR	LVR-IC	LDO, 7.3V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26C	-	XC6216D732FR	LVR-IC	7.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26D	-	XC6202P742FR	LVR-IC	LDO, 7.4V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26D	-	XC6216D742FR	LVR-IC	7.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26E	-	XC6202P752FR	LVR-IC	LDO, 7.5V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26E	-	XC6216D752FR	LVR-IC	7.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26F	-	XC6202P762FR	LVR-IC	LDO, 7.6V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26F	-	XC6216D762FR	LVR-IC	7.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26H	-	XC6202P772FR	LVR-IC	LDO, 7.7V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26H	-	XC6216D772FR	LVR-IC	7.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26K	-	XC6202P782FR	LVR-IC	LDO, 7.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26K	-	XC6216D782FR	LVR-IC	7.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26L	-	XC6202P792FR	LVR-IC	LDO, 7.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
26L	-	XC6216D792FR	LVR-IC	7.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26M	-	XC6202P802FR	LVR-IC	LDO, 8.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26M	-	XC6216D802FR	LVR-IC	8.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26N	-	XC6202P812FR	LVR-IC	LDO, 8.1V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26N	-	XC6216D812FR	LVR-IC	8.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26P	-	XC6202P822FR	LVR-IC	LDO, 8.2V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26P	-	XC6216D822FR	LVR-IC	8.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26R	-	XC6202P832FR	LVR-IC	LDO, 8.3V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26R	-	XC6216D832FR	LVR-IC	8.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26S	-	XC6202P842FR	LVR-IC	LDO, 8.4V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26S	-	XC6216D842FR	LVR-IC	8.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26T	-	XC6202P852FR	LVR-IC	LDO, 8.5V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26T	-	XC6216D852FR	LVR-IC	8.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26U	-	XC6202P862FR	LVR-IC	LDO, 8.6V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26U	-	XC6216D862FR	LVR-IC	8.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26V	-	XC6202P872FR	LVR-IC	LDO, 8.7V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26V	-	XC6216D872FR	LVR-IC	8.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26X	-	XC6202P882FR	LVR-IC	LDO, 8.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26X	-	XC6216D882FR	LVR-IC	8.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26Y	-	XC6202P892FR	LVR-IC	LDO, 8.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26Y	-	XC6216D892FR	LVR-IC	8.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
26Z	-	XC6202P902FR	LVR-IC	LDO, 9.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
26Z	-	XC6216D902FR	LVR-IC	9.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
270	-	XC6202P912FR	LVR-IC	LDO, 9.1V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
270	-	XC6216D912FR	LVR-IC	9.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
271	-	XC6202P922FR	LVR-IC	LDO, 9.2V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
271	-	XC6216D922FR	LVR-IC	9.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
272	-	XC6202P932FR	LVR-IC	LDO, 9.3V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
272	-	XC6216D932FR	LVR-IC	9.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
273	-	XC6202P942FR	LVR-IC	LDO, 9.4V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
273	-	XC6216D942FR	LVR-IC	9.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
274	-	XC6202P952FR	LVR-IC	LDO, 9.5V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
274	-	XC6216D952FR	LVR-IC	9.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
275	-	XC6202P962FR	LVR-IC	LDO, 9.6V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
275	-	XC6216D962FR	LVR-IC	9.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27525	-	MC33275ST-2.5T3	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-223	21hn	VR1	4s	Ons
27525G	-	MC33275ST-2.5T3G	LVR-IC	LDO, 2.5V±1%, 300mA, Pb-free	SOT-223	21hn	VR1	4s	Ons
27530	-	MC33275ST-3.0T3	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-223	21hn	VR1	4s	Ons
27530G	-	MC33275ST-3.0T3G	LVR-IC	LDO, 3.0V±1%, 300mA, Pb-free	SOT-223	21hn	VR1	4s	Ons
27533	-	MC33275ST-3.3T3	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-223	21hn	VR1	4s	Ons
27533G	-	MC33275ST-3.3T3G	LVR-IC	LDO, 3.3V±1%, 300mA, Pb-free	SOT-223	21hn	VR1	4s	Ons
27533V	-	NCV33275ST-3.3T3	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-223	21hn	VR1	4s	Ons
27533VG	-	NCV33275ST-3.3T3G	LVR-IC	LDO, 3.3V±1%, 300mA, Pb-free	SOT-223	21hn	VR1	4s	Ons
27550	-	MC33275ST-5.0T3	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-223	21hn	VR1	4s	Ons
27550G	-	MC33275ST-5.0T3G	LVR-IC	LDO, 5.0V±1%, 300mA, Pb-free	SOT-223	21hn	VR1	4s	Ons
27550V	-	NCV33275ST-5.0T3	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-223	21hn	VR1	4s	Ons
27550VG	-	NCV33275ST-5.0T3G	LVR-IC	LDO, 5.0V±1%, 300mA, Pb-free	SOT-223	21hn	VR1	4s	Ons
276	-	XC6202P972FR	LVR-IC	LDO, 9.7V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
276	-	XC6216D972FR	LVR-IC	9.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
277	-	XC6202P982FR	LVR-IC	LDO, 9.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
277	-	XC6216D982FR	LVR-IC	9.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
278	-	XC6202P992FR	LVR-IC	LDO, 9.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
278	-	XC6216D992FR	LVR-IC	9.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
279	-	XC6202PA02FR	LVR-IC	LDO, 10.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
279	-	XC6216DA02FR	LVR-IC	10.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27A	-	XC6202PA12FR	LVR-IC	LDO, 10.1V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27A	-	XC6216DA12FR	LVR-IC	10.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27B	-	XC6202PA22FR	LVR-IC	LDO, 10.2V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27B	-	XC6216DA22FR	LVR-IC	10.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27C	-	XC6202PA32FR	LVR-IC	LDO, 10.3V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27C	-	XC6216DA32FR	LVR-IC	10.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27D	-	XC6202PA42FR	LVR-IC	LDO, 10.4V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27D	-	XC6216DA42FR	LVR-IC	10.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27E	-	XC6202PA52FR	LVR-IC	LDO, 10.5V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27E	-	XC6216DA52FR	LVR-IC	10.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27F	-	XC6202PA62FR	LVR-IC	LDO, 10.6V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27F	-	XC6216DA62FR	LVR-IC	10.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27H	-	XC6202PA72FR	LVR-IC	LDO, 10.7V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27H	-	XC6216DA72FR	LVR-IC	10.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27K	-	XC6202PA82FR	LVR-IC	LDO, 10.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
27K	-	XC6216DA82FR	LVR-IC	10.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27L	-	XC6202PA92FR	LVR-IC	LDO, 10.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27L	-	XC6216DA92FR	LVR-IC	10.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27M	-	XC6202PB02FR	LVR-IC	LDO, 11.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27M	-	XC6216DB02FR	LVR-IC	11.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27N	-	XC6202PB12FR	LVR-IC	LDO, 11.1V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27N	-	XC6216DB12FR	LVR-IC	11.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27P	-	XC6202PB22FR	LVR-IC	LDO, 11.2V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27P	-	XC6216DB22FR	LVR-IC	11.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27R	-	XC6202PB32FR	LVR-IC	LDO, 11.3V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27R	-	XC6216DB32FR	LVR-IC	11.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27S	-	XC6202PB42FR	LVR-IC	LDO, 11.4V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27S	-	XC6216DB42FR	LVR-IC	11.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27T	-	XC6202PB52FR	LVR-IC	LDO, 11.5V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27T	-	XC6216DB52FR	LVR-IC	11.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27U	-	XC6202PB62FR	LVR-IC	LDO, 11.6V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27U	-	XC6216DB62FR	LVR-IC	11.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27V	-	XC6202PB72FR	LVR-IC	LDO, 11.7V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27V	-	XC6216DB72FR	LVR-IC	11.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27X	-	XC6202PB82FR	LVR-IC	LDO, 11.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27X	-	XC6216DB82FR	LVR-IC	11.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27Y	-	XC6202PB92FR	LVR-IC	LDO, 11.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27Y	-	XC6216DB92FR	LVR-IC	11.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
27Z	-	XC6202PC02FR	LVR-IC	LDO, 12.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
27Z	-	XC6216DC02FR	LVR-IC	12.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
280	-	XC6202PC12FR	LVR-IC	LDO, 12.1V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
281	-	XC6202PC22FR	LVR-IC	LDO, 12.2V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
282	-	XC6202PC32FR	LVR-IC	LDO, 12.3V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
283	-	XC6202PC42FR	LVR-IC	LDO, 12.4V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
284	-	XC6202PC52FR	LVR-IC	LDO, 12.5V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
285	-	XC6202PC62FR	LVR-IC	LDO, 12.6V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
286	-	XC6202PC72FR	LVR-IC	LDO, 12.7V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
287	-	XC6202PC82FR	LVR-IC	LDO, 12.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
288	-	XC6202PC92FR	LVR-IC	LDO, 12.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
289	-	XC6202PD02FR	LVR-IC	LDO, 13.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28A	-	XC6202PD12FR	LVR-IC	LDO, 13.1V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28B	-	XC6202PD22FR	LVR-IC	LDO, 13.2V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28C	-	XC6202PD32FR	LVR-IC	LDO, 13.3V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28D	-	XC6202PD42FR	LVR-IC	LDO, 13.4V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28E	-	XC6202PD52FR	LVR-IC	LDO, 13.5V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28F	-	XC6202PD62FR	LVR-IC	LDO, 13.6V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28H	-	XC6202PD72FR	LVR-IC	LDO, 13.7V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28K	-	XC6202PD82FR	LVR-IC	LDO, 13.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28L	-	XC6202PD92FR	LVR-IC	LDO, 13.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28M	-	XC6202PE02FR	LVR-IC	LDO, 14.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28N	-	XC6202PE12FR	LVR-IC	LDO, 14.1V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28P	-	XC6202PE22FR	LVR-IC	LDO, 14.2V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28R	-	XC6202PE32FR	LVR-IC	LDO, 14.3V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28S	-	XC6202PE42FR	LVR-IC	LDO, 14.4V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28T	-	XC6202PE52FR	LVR-IC	LDO, 14.5V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28U	-	XC6202PE62FR	LVR-IC	LDO, 14.6V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28V	-	XC6202PE72FR	LVR-IC	LDO, 14.7V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28X	-	XC6202PE82FR	LVR-IC	LDO, 14.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28Y	-	XC6202PE92FR	LVR-IC	LDO, 14.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
28Z	-	XC6202PF02FR	LVR-IC	LDO, 15.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
290	-	XC6202PF12FR	LVR-IC	LDO, 15.1V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
2907A	-	PZT2907A	Si-pnp	Sw, 60V, 600mA, 1.5W, B=100..300, >200MHz	SOT-223	21tm	-	4rb	Sec
291	-	XC6202PF22FR	LVR-IC	LDO, 15.2V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
292	-	XC6202PF32FR	LVR-IC	LDO, 15.3V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
293	-	XC6202PF42FR	LVR-IC	LDO, 15.4V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
294	-	XC6202PF52FR	LVR-IC	LDO, 15.5V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
295	-	XC6202PF62FR	LVR-IC	LDO, 15.6V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
2955	-	MMFT2955E	p-MOSFET	V-MOS, 60V, 1.2A, <0.3Ω(500mA)	SOT-223	21f2	-	4s	Mot
296	-	XC6202PF72FR	LVR-IC	LDO, 15.7V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
297	-	XC6202PF82FR	LVR-IC	LDO, 15.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
298	-	XC6202PF92FR	LVR-IC	LDO, 15.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
299	-	XC6202PG02FR	LVR-IC	LDO, 16.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29A	-	XC6202PG12FR	LVR-IC	LDO, 16.1V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29B	-	XC6202PG22FR	LVR-IC	LDO, 16.2V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29C	-	XC6202PG32FR	LVR-IC	LDO, 16.3V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
29D	-	XC6202PG42FR	LVR-IC	LDO, 16.4V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29E	-	XC6202PG52FR	LVR-IC	LDO, 16.5V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29F	-	XC6202PG62FR	LVR-IC	LDO, 16.6V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29H	-	XC6202PG72FR	LVR-IC	LDO, 16.7V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29K	-	XC6202PG82FR	LVR-IC	LDO, 16.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29L	-	XC6202PG92FR	LVR-IC	LDO, 16.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29M	-	XC6202PH02FR	LVR-IC	LDO, 17.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29N	-	XC6202PH12FR	LVR-IC	LDO, 17.1V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29P	-	XC6202PH22FR	LVR-IC	LDO, 17.2V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29R	-	XC6202PH32FR	LVR-IC	LDO, 17.3V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29S	-	XC6202PH42FR	LVR-IC	LDO, 17.4V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29T	-	XC6202PH52FR	LVR-IC	LDO, 17.5V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29U	-	XC6202PH62FR	LVR-IC	LDO, 17.6V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29V	-	XC6202PH72FR	LVR-IC	LDO, 17.7V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29X	-	XC6202PH82FR	LVR-IC	LDO, 17.8V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29Y	-	XC6202PH92FR	LVR-IC	LDO, 17.9V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
29Z	-	XC6202PJ02FR	LVR-IC	LDO, 18.0V±2%, 150mA	SOT-223	21ch	VR1	4w	Tor
2CJQE	-	20CJQ030	Si-diode	Dual, Schottky Rectifier, 30V, 2A, Vf<0.42V(1A)	SOT-223	21bs	-	4k	Irf
2N02L	-	MMFT2N02EL	n-MOSFET	V-MOS, LogL, 20V, 1.6A, <0.15Ω	SOT-223	21f2	-	4s	Mot
2N603L	-	BSP603S2L	n-MOSFET	OptiMOS, LogL, 55V, 5.2A, 1.8W, 33mΩ(2.6A), 10.8/28ns	SOT-223	21f2	-	4k	Inf
2N615L	-	BSP615S2L	n-MOSFET	OptiMOS, LogL, 55V, 2.8A, 1.8W, 90mΩ(1.4A), 7.8/22ns	SOT-223	21f2	-	4k	Inf
3019	-	PZT3019	Si-npn	AF, Sw, 140V, 1A, 2W, B=100..300, 100MHz	SOT-223	21tm	-	4rb	Sec
3055	-	CHM3055ZPT	n-MOSFET	GP, 60V, 4A, 3W, Rds=0.1Ω(4A), 17/41ns	SOT-223	21fh	-	4r	Chm
3055	-	NTF3055-100	n-MOSFET	V-MOS, LogL, 60V, 3A, 2.1W, 88mΩ(1.5A), 9.4/21ns	SOT-223	21f2	-	4s	Ons
3055L	-	NTF3055L108	n-MOSFET	V-MOS, LogL, 60V, 3A, 2.1W, 92mΩ(1.5A), 11/22ns	SOT-223	21f2	-	4s	Ons
32K	-	XC6203E182FR	LVR-IC	1.8V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
32L	-	XC6203E192FR	LVR-IC	1.9V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
32M	-	XC6203E202FR	LVR-IC	2.0V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
32N	-	XC6203E212FR	LVR-IC	2.1V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
32P	-	XC6203E222FR	LVR-IC	2.2V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
32R	-	XC6203E232FR	LVR-IC	2.3V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
32S	-	XC6203E242FR	LVR-IC	2.4V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
32T	-	XC6203E252FR	LVR-IC	2.5V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
32U	-	XC6203E262FR	LVR-IC	2.6V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
32V	-	XC6203E272FR	LVR-IC	2.7V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
32X	-	XC6203E282FR	LVR-IC	2.8V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
32Y	-	XC6203E292FR	LVR-IC	2.9V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
32Z	-	XC6203E302FR	LVR-IC	3.0V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
330	-	XC6203E312FR	LVR-IC	3.1V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
331	-	XC6203E322FR	LVR-IC	3.2V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
332	-	XC6203E332FR	LVR-IC	3.3V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
333	-	XC6203E342FR	LVR-IC	3.4V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
334	-	XC6203E352FR	LVR-IC	3.5V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
335	-	XC6203E362FR	LVR-IC	3.6V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
336	-	XC6203E372FR	LVR-IC	3.7V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
337	-	XC6203E382FR	LVR-IC	3.8V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
338	-	XC6203E392FR	LVR-IC	3.9V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
339	-	XC6203E402FR	LVR-IC	4.0V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33A	-	XC6203E412FR	LVR-IC	4.1V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33B	-	XC6203E422FR	LVR-IC	4.2V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33C	-	XC6203E432FR	LVR-IC	4.3V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33D	-	XC6203E442FR	LVR-IC	4.4V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33E	-	XC6203E452FR	LVR-IC	4.5V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33F	-	XC6203E462FR	LVR-IC	4.6V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33H	-	XC6203E472FR	LVR-IC	4.7V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33K	-	XC6203E482FR	LVR-IC	4.8V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33L	-	XC6203E492FR	LVR-IC	4.9V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33M	-	XC6203E502FR	LVR-IC	5.0V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33N	-	XC6203E512FR	LVR-IC	5.1V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33P	-	XC6203E522FR	LVR-IC	5.2V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33R	-	XC6203E532FR	LVR-IC	5.3V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33S	-	XC6203E542FR	LVR-IC	5.4V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33T	-	XC6203E552FR	LVR-IC	5.5V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33U	-	XC6203E562FR	LVR-IC	5.6V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33V	-	XC6203E572FR	LVR-IC	5.7V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33X	-	XC6203E582FR	LVR-IC	5.8V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33Y	-	XC6203E592FR	LVR-IC	5.9V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
33Z	-	XC6203E602FR	LVR-IC	6.0V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor
3435A	-	CHM9435AZPT	p-MOSFET	GP, 30V, 5.3A, 2.5W, Rds=0.09Ω(4.2A), 9/36ns	SOT-223	21fh	-	4r	Chm
34X	-	XC6203E28AFR	LVR-IC	2.85V±2%, 400mA	SOT-223	21vl	VR1	4w	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
358	-	PZT358	Si-npn	AF, Sw, 200V, 6A, 3W, B=100..300, 130MHz	SOT-223	21tm	-	4rb	Sec
359	-	PZT359	Si-pnp	AF, Sw, 140V, 5A, 3W, B=100..300, 125MHz	SOT-223	21tm	-	4rb	Sec
35K	-	XC6203P182FR	LVR-IC	1.8V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
35L	-	XC6203P192FR	LVR-IC	1.9V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
35M	-	XC6203P202FR	LVR-IC	2.0V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
35N	-	XC6203P212FR	LVR-IC	2.1V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
35P	-	XC6203P222FR	LVR-IC	2.2V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
35R	-	XC6203P232FR	LVR-IC	2.3V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
35S	-	XC6203P242FR	LVR-IC	2.4V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
35T	-	XC6203P252FR	LVR-IC	2.5V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
35U	-	XC6203P262FR	LVR-IC	2.6V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
35V	-	XC6203P272FR	LVR-IC	2.7V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
35X	-	XC6203P282FR	LVR-IC	2.8V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
35Y	-	XC6203P292FR	LVR-IC	2.9V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
35Z	-	XC6203P302FR	LVR-IC	3.0V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
360	-	XC6203P312FR	LVR-IC	3.1V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
361	-	XC6203P322FR	LVR-IC	3.2V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
362	-	XC6203P332FR	LVR-IC	3.3V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
363	-	XC6203P342FR	LVR-IC	3.4V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
364	-	XC6203P352FR	LVR-IC	3.5V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
365	-	XC6203P362FR	LVR-IC	3.6V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
366	-	XC6203P372FR	LVR-IC	3.7V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
367	-	XC6203P382FR	LVR-IC	3.8V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
368	-	XC6203P392FR	LVR-IC	3.9V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
369	-	XC6203P402FR	LVR-IC	4.0V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36A	-	XC6203P412FR	LVR-IC	4.1V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36B	-	XC6203P422FR	LVR-IC	4.2V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36C	-	XC6203P432FR	LVR-IC	4.3V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36D	-	XC6203P442FR	LVR-IC	4.4V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36E	-	XC6203P452FR	LVR-IC	4.5V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36F	-	XC6203P462FR	LVR-IC	4.6V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36H	-	XC6203P472FR	LVR-IC	4.7V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36K	-	XC6203P482FR	LVR-IC	4.8V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36L	-	XC6203P492FR	LVR-IC	4.9V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36M	-	XC6203P502FR	LVR-IC	5.0V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36N	-	XC6203P512FR	LVR-IC	5.1V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36P	-	XC6203P522FR	LVR-IC	5.2V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36R	-	XC6203P532FR	LVR-IC	5.3V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36S	-	XC6203P542FR	LVR-IC	5.4V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36T	-	XC6203P552FR	LVR-IC	5.5V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36U	-	XC6203P562FR	LVR-IC	5.6V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36V	-	XC6203P572FR	LVR-IC	5.7V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36X	-	XC6203P582FR	LVR-IC	5.8V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36Y	-	XC6203P592FR	LVR-IC	5.9V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
36Z	-	XC6203P602FR	LVR-IC	6.0V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
37518	-	MC33375ST-1.8T3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SOT-223	21hy	VR4	4s	Ons
37525	-	MC33375ST-2.5T3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-223	21hy	VR4	4s	Ons
37530	-	MC33375ST-3.0T3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SOT-223	21hy	VR4	4s	Ons
37533	-	MC33375ST-3.3T3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-223	21hy	VR4	4s	Ons
37550	-	MC33375ST-5.0T3	LVR-IC	LDO, 5.0V±1%, 300mA, +CE	SOT-223	21hy	VR4	4s	Ons
37X	-	XC6203P28AFR	LVR-IC	2.85V±2%, 400mA, Internal current limiter	SOT-223	21vl	VR1	4w	Tor
3904	-	PZT3904	Si-npn	Sw, 60V, 100mA, 1.2W, B=100..300, >300MHz	SOT-223	21tm	-	4k	Ste
3906	-	PZT3906	Si-pnp	Sw, 60V, 200mA, 1W, B=100..300, >250MHz	SOT-223	21tm	-	4rb	Sec
40300	-	NSS40300MZ4	Si-pnp	Drv, 40V, 3A, 2W, B=200..350, 126MHz	SOT-223	21tm	-	4s	Ons
40301	-	NSS40301MZ4	Si-npn	Drv, 40V, 3A, 2W, B=220..500, 215MHz	SOT-223	21tm	-	4s	Ons
4030P	-	NJT4030P	Si-npn	GP, 40V, 1A, 2W, B=220..400, 160MHz	SOT-223	21tm	-	4s	Ons
4301	-	CHM4301ZPT	p-MOSFET	GP, 40V, 6.3A, 3W, Rds=0.068Ω(3A)	SOT-223	21fh	-	4r	Chm
44	-	PZTA44	Si-npn	Vid, 500/400V, 300mA, 2W, B=400..300	SOT-223	21tm	-	4r	Wtr
4401	-	CHM4401ZPT	p-MOSFET	GP, 40V, 5.6A, 3W, Rds=0.085Ω(2.9A)	SOT-223	21fh	-	4r	Chm
4401Q	-	PZT4401Q	Si-npn	AF, Sw, 60V, 600mA, 1.5W, B=100..210, >250MHz	SOT-223	21tm	-	4rb	Sec
4401R	-	PZT4401R	Si-npn	AF, Sw, 60V, 600mA, 1.5W, B=190..300, >250MHz	SOT-223	21tm	-	4rb	Sec
4435A	-	CHM4435AZPT	p-MOSFET	GP, 30V, 8.8A, 3W, Rds=0.035Ω(5A)	SOT-223	21fh	-	4r	Chm
451AN	-	CHM451ANZPT	n-MOSFET	GP, 30V, 7.2A, 3W, Rds=0.05Ω(6A)	SOT-223	21fh	-	4r	Chm
452	-	SSM452	p-MOSFET	Sw, 30V, 6A, 2.7W, Rds=55mΩ(5.3A), 11/25ns	SOT-223	21fi	-	4rb	Sec
453N	-	CHM453NZPT	n-MOSFET	GP, 30V, 8A, 3W, Rds=0.042Ω(6.7A)	SOT-223	21fh	-	4r	Chm
456N	-	CHM456NZPT	n-MOSFET	GP, 30V, 5A, 3W, Rds=0.075Ω(3.8A)	SOT-223	21fh	-	4r	Chm
4N10	-	CHM04N10ZPT	n-MOSFET	GP, 100V, 3A, 3W, Rds=0.28Ω(1.3A)	SOT-223	21fh	-	4r	Chm
51A3	-	CHM51A3ZPT	n-MOSFET	GP, 30V, 9.5A, 3W, Rds=0.028Ω(17.5A), 20/30ns	SOT-223	21fh	-	4r	Chm
5401A	-	CZT5401A	Si-pnp	GP, 160V, 600mA, 1.5W, B=80..200, <300MHz	SOT-223	21tb	-	4rb	Sec
5401C	-	CZT5401C	Si-pnp	GP, 160V, 600mA, 1.5W, B=160..400, <300MHz	SOT-223	21tb	-	4rb	Sec





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5401N	-	CZT5401N	Si-pnp	GP, 160V, 600mA, 1.5W, B=100..240, <300MHz	SOT-223	21tb	-	4rb	Sec
5551A	-	CZT5551A	Si-npn	GP, 180V, 600mA, 1.5W, B=80..200, <300MHz	SOT-223	21tb	-	4rb	Sec
5551A	-	CZT5551C	Si-npn	GP, 180V, 600mA, 1.5W, B=160..400, <300MHz	SOT-223	21tb	-	4rb	Sec
5551A	-	CZT5551N	Si-npn	GP, 180V, 600mA, 1.5W, B=100..240, <300MHz	SOT-223	21tb	-	4rb	Sec
5551A	-	PZT5551A	Si-npn	Drv, 180V, 600mA, 1.5W, B=80..200, <300MHz	SOT-223	21tm	-	4r	Wtr
5551B	-	PZT5551B	Si-npn	Drv, 180V, 600mA, 1.5W, B=100..250, <300MHz	SOT-223	21tm	-	4r	Wtr
5551C	-	PZT5551C	Si-npn	Drv, 180V, 600mA, 1.5W, B=160..400, <300MHz	SOT-223	21tm	-	4r	Wtr
56512	-	NCP565ST12T3	LVR-IC	LDO, 1.2V±1%, 1.5A	SOT-223	21wb	VR1	4s	Ons
56512V	-	NCV565ST12T3	LVR-IC	LDO, 1.2V±1%, 1.5A	SOT-223	21wb	VR1	4s	Ons
5988	-	CHT5988ZPT	Si-pnp	AF, Sw, 60V, 5A, B=120..300, 100MHz	SOT-223	21tb	-	4r	Chm
5L175	-	NTF3055L175	n-MOSFET	V-MOS, LogL, 60V, 2A, 2.1W, 155mΩ(1A), 10.2/14.3ns	SOT-223	21f2	-	4s	Ons
5P03	-	NTF5P03T3	p-MOSFET	V-MOS, LogL, 30V, 5.2A, 1.5W, 56mΩ(5.2A), 10/38ns	SOT-223	21f2	-	4s	Ons
60600	-	NSS60600MZ4	Si-pnp	Drv, 100V, 6A, 800mW, B=150..360, 100MHz	SOT-223	21tm	-	4s	Ons
60601	-	NSS60601MZ4	Si-npn	Drv, 100V, 6A, 800mW, B=150..360, 100MHz	SOT-223	21tm	-	4s	Ons
61-10	-	AP7361-10E	LVR-IC	LDO, 1.0V±2%, 1A	SOT-223	21eu	VR4	4ma	Di
61-12	-	AP7361-12E	LVR-IC	LDO, 1.2V±2%, 1A	SOT-223	21eu	VR4	4ma	Di
61-15	-	AP7361-15E	LVR-IC	LDO, 1.5V±2%, 1A	SOT-223	21eu	VR4	4ma	Di
61-18	-	AP7361-18E	LVR-IC	LDO, 1.8V±2%, 1A	SOT-223	21eu	VR4	4ma	Di
61-25	-	AP7361-25E	LVR-IC	LDO, 2.5V±2%, 1A	SOT-223	21eu	VR4	4ma	Di
61-28	-	AP7361-28E	LVR-IC	LDO, 2.8V±2%, 1A	SOT-223	21eu	VR4	4ma	Di
61-33	-	AP7361-33E	LVR-IC	LDO, 3.3V±2%, 1A	SOT-223	21eu	VR4	4ma	Di
61R-10	-	AP7361-10ER	LVR-IC	LDO, 1.0V±2%, 1A	SOT-223	21cg	VR4	4ma	Di
61R-12	-	AP7361-12ER	LVR-IC	LDO, 1.2V±2%, 1A	SOT-223	21cg	VR4	4ma	Di
61R-15	-	AP7361-15ER	LVR-IC	LDO, 1.5V±2%, 1A	SOT-223	21cg	VR4	4ma	Di
61R-18	-	AP7361-18ER	LVR-IC	LDO, 1.8V±2%, 1A	SOT-223	21cg	VR4	4ma	Di
61R-25	-	AP7361-25ER	LVR-IC	LDO, 2.5V±2%, 1A	SOT-223	21cg	VR4	4ma	Di
61R-28	-	AP7361-28ER	LVR-IC	LDO, 2.8V±2%, 1A	SOT-223	21cg	VR4	4ma	Di
61R-33	-	AP7361-33ER	LVR-IC	LDO, 3.3V±2%, 1A	SOT-223	21cg	VR4	4ma	Di
642	-	NCV4264-2ST33T3G	LVR-IC	LDO, 3.3V±2%, 100mA	SOT-223	21eu	VR1	4s	Ons
642x	-	NCV4264-2ST50T3G	LVR-IC	LDO, 5.0V±2%, 100mA	SOT-223	21eu	VR1	4s	Ons
65-08	-	AP7365-08E	LVR-IC	LDO, 0.8V±2%, 600mA	SOT-223	21ch	VR4	4ma	Di
651	-	PZT651	Si-npn	GP, 80V, 2A, 800mW, B>75, >75MHz	SOT-223	21tm	-	4s	Ons
65-10	-	AP7365-10E	LVR-IC	LDO, 1.0V±2%, 600mA	SOT-223	21ch	VR4	4ma	Di
65-12	-	AP7365-12E	LVR-IC	LDO, 1.2V±2%, 600mA	SOT-223	21ch	VR4	4ma	Di
65-15	-	AP7365-15E	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-223	21ch	VR4	4ma	Di
65-18	-	AP7365-18E	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-223	21ch	VR4	4ma	Di
65-20	-	AP7365-20E	LVR-IC	LDO, 2.0V±2%, 600mA	SOT-223	21ch	VR4	4ma	Di
65-25	-	AP7365-25E	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-223	21ch	VR4	4ma	Di
65-28	-	AP7365-28E	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-223	21ch	VR4	4ma	Di
65-30	-	AP7365-30E	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-223	21ch	VR4	4ma	Di
65-33	-	AP7365-33E	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-223	21ch	VR4	4ma	Di
65-39	-	AP7365-39E	LVR-IC	LDO, 3.9V±2%, 600mA	SOT-223	21ch	VR4	4ma	Di
65R-08	-	AP7365-08ER	LVR-IC	LDO, 0.8V±2%, 600mA	SOT-223	21vl	VR4	4ma	Di
65R-10	-	AP7365-10ER	LVR-IC	LDO, 1.0V±2%, 600mA	SOT-223	21vl	VR4	4ma	Di
65R-12	-	AP7365-12ER	LVR-IC	LDO, 1.2V±2%, 600mA	SOT-223	21vl	VR4	4ma	Di
65R-15	-	AP7365-15ER	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-223	21vl	VR4	4ma	Di
65R-18	-	AP7365-18ER	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-223	21vl	VR4	4ma	Di
65R-20	-	AP7365-20ER	LVR-IC	LDO, 2.0V±2%, 600mA	SOT-223	21vl	VR4	4ma	Di
65R-25	-	AP7365-25ER	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-223	21vl	VR4	4ma	Di
65R-28	-	AP7365-28ER	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-223	21vl	VR4	4ma	Di
65R-30	-	AP7365-30ER	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-223	21vl	VR4	4ma	Di
65R-33	-	AP7365-33ER	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-223	21vl	VR4	4ma	Di
65R-39	-	AP7385-39ER	LVR-IC	LDO, 3.9V±2%, 600mA	SOT-223	21vl	VR4	4ma	Di
6718	-	PZT6718	Si-npn	AF, Sw, 100V, 1A, 1.5W, B=100..310, >50MHz	SOT-223	21tm	-	4rb	Sec
6861	-	CHM6861ZGP	p-MOSFET	GP, 60V, 3.5A, 3W, Rds<0.13Ω(3.1A), 12/38ns	SOT-223	21fh	-	4r	Chm
7-285	-	NCP1117ST285T3	LVR-IC	LDO, 2.85V±1%, 800mA	SOT-223	21wb	VR1	4s	Ons
7-285V	-	NCV1117ST285T3	LVR-IC	LDO, 2.85V±1%, 800mA	SOT-223	21wb	VR1	4s	Ons
74-25G	-	NCV4274ST25T3G	LVR-IC	LDO, 2.5V±2%, 100mA	SOT-223	21hn	VR1	4s	Ons
74-33G	-	NCV4274ST33T3G	LVR-IC	LDO, 3.3V±2%, 100mA	SOT-223	21hn	VR1	4s	Ons
74A-25G	-	NCV4274AST25T3G	LVR-IC	LDO, 2.5V±1%, 100mA	SOT-223	21hn	VR1	4s	Ons
74A-33G	-	NCV4274AST33T3G	LVR-IC	LDO, 3.3V±1%, 100mA	SOT-223	21hn	VR1	4s	Ons
772	-	2SB772ZPT	Si-pnp	AF, Sw, 30V, 3A, B=100..500, 100MHz	SOT-223	21tb	-	4r	Chm
7CE12Z	-	NX1117CE12Z	LVR-IC	LDO, 1.2V±1.5%, 1A	SOT-223	21wb	VR1	4r	Nxp
7CE15Z	-	NX1117CE15Z	LVR-IC	LDO, 1.5V±1.5%, 1A	SOT-223	21wb	VR1	4r	Nxp
7CE18Z	-	NX1117CE18Z	LVR-IC	LDO, 1.8V±1.5%, 1A	SOT-223	21wb	VR1	4r	Nxp
7CE19Z	-	NX1117CE19Z	LVR-IC	LDO, 1.9V±1.5%, 1A	SOT-223	21wb	VR1	4r	Nxp
7CE20Z	-	NX1117CE20Z	LVR-IC	LDO, 2.0V±1.5%, 1A	SOT-223	21wb	VR1	4r	Nxp
7CE25Z	-	NX1117CE25Z	LVR-IC	LDO, 2.5V±1.5%, 1A	SOT-223	21wb	VR1	4r	Nxp
7CE285	-	NX1117CE285Z	LVR-IC	LDO, 2.85V±1.5%, 1A	SOT-223	21wb	VR1	4r	Nxp
7CE33Z	-	NX1117CE33Z	LVR-IC	LDO, 3.0V±1.5%, 1A	SOT-223	21wb	VR1	4r	Nxp



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7CE50Z	-	NX1117CE50Z	LVR-IC	LDO, 5.0V±1.5%, 1A	SOT-223	21wb	VR1	4r	Nxp
7CEADJ	-	NX1117CEADJZ	LVR-IC	LDO, Adjustable 12..5.0V±1.5%, 1A	SOT-223	21wc	VR20	4r	Nxp
842	-	MCP1804T-3302I/DB	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-223	21ch	VR1	4wa	Mcc
849	-	MCP1804T-A002I/DB	LVR-IC	LDO, 10.0V±2%, 150mA	SOT-223	21ch	VR1	4wa	Mcc
84K	-	MCP1804T-1802I/DB	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-223	21ch	VR1	4wa	Mcc
84K	-	XC6701D18FR	LVR-IC	1.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
84L	-	XC6701D19FR	LVR-IC	1.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
84M	-	MCP1804T-5002I/DB	LVR-IC	LDO, 5.0V±2%, 150mA	SOT-223	21ch	VR1	4wa	Mcc
84M	-	XC6701D20FR	LVR-IC	2.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
84N	-	XC6701D21FR	LVR-IC	2.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
84P	-	XC6701D22FR	LVR-IC	2.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
84R	-	XC6701D23FR	LVR-IC	2.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
84S	-	XC6701D24FR	LVR-IC	2.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
84T	-	MCP1804T-2502I/DB	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-223	21ch	VR1	4wa	Mcc
84T	-	XC6701D25FR	LVR-IC	2.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
84U	-	XC6701D26FR	LVR-IC	2.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
84V	-	XC6701D27FR	LVR-IC	2.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
84X	-	XC6701D28FR	LVR-IC	2.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
84Y	-	XC6701D29FR	LVR-IC	2.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
84Z	-	MCP1804T-3002I/DB	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-223	21ch	VR1	4wa	Mcc
84Z	-	XC6701D30FR	LVR-IC	3.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
850	-	XC6701D31FR	LVR-IC	3.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
851	-	XC6701D32FR	LVR-IC	3.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
852	-	XC6701D33FR	LVR-IC	3.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
853	-	XC6701D34FR	LVR-IC	3.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
854	-	XC6701D35FR	LVR-IC	3.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
855	-	XC6701D36FR	LVR-IC	3.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
856	-	XC6701D37FR	LVR-IC	3.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
857	-	XC6701D38FR	LVR-IC	3.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
858	-	XC6701D39FR	LVR-IC	3.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
859	-	XC6701D40FR	LVR-IC	4.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85A	-	XC6701D41FR	LVR-IC	4.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85B	-	XC6701D42FR	LVR-IC	4.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85C	-	XC6701D43FR	LVR-IC	4.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85D	-	XC6701D44FR	LVR-IC	4.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85E	-	XC6701D45FR	LVR-IC	4.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85F	-	XC6701D46FR	LVR-IC	4.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85H	-	XC6701D47FR	LVR-IC	4.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85K	-	XC6701D48FR	LVR-IC	4.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85L	-	XC6701D49FR	LVR-IC	4.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85M	-	XC6701D50FR	LVR-IC	5.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85N	-	XC6701D51FR	LVR-IC	5.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85P	-	XC6701D52FR	LVR-IC	5.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85R	-	XC6701D53FR	LVR-IC	5.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85S	-	XC6701D54FR	LVR-IC	5.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85T	-	XC6701D55FR	LVR-IC	5.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85U	-	XC6701D56FR	LVR-IC	5.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85V	-	XC6701D57FR	LVR-IC	5.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85X	-	XC6701D58FR	LVR-IC	5.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85Y	-	XC6701D59FR	LVR-IC	5.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
85Z	-	XC6701D60FR	LVR-IC	6.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
860	-	XC6701D61FR	LVR-IC	6.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
861	-	XC6701D62FR	LVR-IC	6.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
862	-	XC6701D63FR	LVR-IC	6.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
863	-	XC6701D64FR	LVR-IC	6.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
864	-	XC6701D65FR	LVR-IC	6.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
865	-	XC6701D66FR	LVR-IC	6.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
866	-	XC6701D67FR	LVR-IC	6.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
867	-	XC6701D68FR	LVR-IC	6.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
868	-	XC6701D69FR	LVR-IC	6.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
869	-	XC6701D70FR	LVR-IC	7.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86A	-	XC6701D71FR	LVR-IC	7.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86B	-	XC6701D72FR	LVR-IC	7.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86C	-	XC6701D73FR	LVR-IC	7.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86D	-	XC6701D74FR	LVR-IC	7.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86E	-	XC6701D75FR	LVR-IC	7.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86F	-	XC6701D76FR	LVR-IC	7.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86H	-	XC6701D77FR	LVR-IC	7.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86K	-	XC6701D78FR	LVR-IC	7.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86L	-	XC6701D79FR	LVR-IC	7.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
86M	-	XC6701D80FR	LVR-IC	8.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86N	-	XC6701D81FR	LVR-IC	8.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86P	-	XC6701D82FR	LVR-IC	8.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86R	-	XC6701D83FR	LVR-IC	8.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86S	-	XC6701D84FR	LVR-IC	8.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86T	-	XC6701D85FR	LVR-IC	8.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86U	-	XC6701D86FR	LVR-IC	8.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86V	-	XC6701D87FR	LVR-IC	8.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86X	-	XC6701D88FR	LVR-IC	8.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86Y	-	XC6701D89FR	LVR-IC	8.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
86Z	-	XC6701D90FR	LVR-IC	9.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
870	-	XC6701D91FR	LVR-IC	9.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
871	-	XC6701D92FR	LVR-IC	9.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
872	-	XC6701D93FR	LVR-IC	9.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
873	-	XC6701D94FR	LVR-IC	9.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
874	-	XC6701D95FR	LVR-IC	9.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
875	-	XC6701D96FR	LVR-IC	9.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
876	-	XC6701D97FR	LVR-IC	9.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
877	-	XC6701D98FR	LVR-IC	9.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
878	-	XC6701D99FR	LVR-IC	9.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
879	-	XC6701DA0FR	LVR-IC	10.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87A	-	XC6701DA1FR	LVR-IC	10.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87B	-	XC6701DA2FR	LVR-IC	10.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87C	-	XC6701DA3FR	LVR-IC	10.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87D	-	XC6701DA4FR	LVR-IC	10.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87E	-	XC6701DA5FR	LVR-IC	10.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87F	-	XC6701DA6FR	LVR-IC	10.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87H	-	XC6701DA7FR	LVR-IC	10.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87K	-	XC6701DA8FR	LVR-IC	10.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87L	-	XC6701DA9FR	LVR-IC	10.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87M	-	XC6701DB0FR	LVR-IC	11.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87N	-	XC6701DB1FR	LVR-IC	11.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87P	-	XC6701DB2FR	LVR-IC	11.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87R	-	XC6701DB3FR	LVR-IC	11.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87S	-	XC6701DB4FR	LVR-IC	11.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87T	-	XC6701DB5FR	LVR-IC	11.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87U	-	XC6701DB6FR	LVR-IC	11.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87V	-	XC6701DB7FR	LVR-IC	11.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87X	-	XC6701DB8FR	LVR-IC	11.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87Y	-	XC6701DB9FR	LVR-IC	11.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
87Z	-	MCP1804T-C002I/DB	LVR-IC	LDO, 12.0V±2%, 150mA	SOT-223	21ch	VR1	4wa	Mcc
87Z	-	XC6701DC0FR	LVR-IC	12.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
882	-	2SD882ZPT	Si-npn	AF, Sw, 30V, 3A, B=100..500, 100MHz	SOT-223	21tb	-	4r	Chm
8C0	-	XC6701DC1FR	LVR-IC	12.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8C1	-	XC6701DC2FR	LVR-IC	12.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8C2	-	XC6701DC3FR	LVR-IC	12.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8C3	-	XC6701DC4FR	LVR-IC	12.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8C4	-	XC6701DC5FR	LVR-IC	12.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8C5	-	XC6701DC6FR	LVR-IC	12.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8C6	-	XC6701DC7FR	LVR-IC	12.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8C7	-	XC6701DC8FR	LVR-IC	12.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8C8	-	XC6701DC9FR	LVR-IC	12.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8C9	-	XC6701DD0FR	LVR-IC	13.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CA	-	XC6701DD1FR	LVR-IC	13.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CB	-	XC6701DD2FR	LVR-IC	13.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CC	-	XC6701DD3FR	LVR-IC	13.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CD	-	XC6701DD4FR	LVR-IC	13.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CE	-	XC6701DD5FR	LVR-IC	13.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CF	-	XC6701DD6FR	LVR-IC	13.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CH	-	XC6701DD7FR	LVR-IC	13.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CK	-	XC6701DD8FR	LVR-IC	13.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CL	-	XC6701DD9FR	LVR-IC	13.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CM	-	XC6701DE0FR	LVR-IC	14.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CN	-	XC6701DE1FR	LVR-IC	14.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CP	-	XC6701DE2FR	LVR-IC	14.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CR	-	XC6701DE3FR	LVR-IC	14.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CS	-	XC6701DE4FR	LVR-IC	14.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CT	-	XC6701DE5FR	LVR-IC	14.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CU	-	XC6701DE6FR	LVR-IC	14.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CV	-	XC6701DE7FR	LVR-IC	14.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8CX	-	XC6701DE8FR	LVR-IC	14.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CY	-	XC6701DE9FR	LVR-IC	14.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8CZ	-	XC6701DF0FR	LVR-IC	15.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8D0	-	XC6701DF1FR	LVR-IC	15.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8D1	-	XC6701DF2FR	LVR-IC	15.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8D2	-	XC6701DF3FR	LVR-IC	15.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8D3	-	XC6701DF4FR	LVR-IC	15.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8D4	-	XC6701DF5FR	LVR-IC	15.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8D5	-	XC6701DF6FR	LVR-IC	15.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8D6	-	XC6701DF7FR	LVR-IC	15.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8D7	-	XC6701DF8FR	LVR-IC	15.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8D8	-	XC6701DF9FR	LVR-IC	15.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8D9	-	XC6701DG0FR	LVR-IC	16.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DA	-	XC6701DG1FR	LVR-IC	16.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DB	-	XC6701DG2FR	LVR-IC	16.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DC	-	XC6701DG3FR	LVR-IC	16.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DD	-	XC6701DG4FR	LVR-IC	16.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DE	-	XC6701DG5FR	LVR-IC	16.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DF	-	XC6701DG6FR	LVR-IC	16.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DH	-	XC6701DG7FR	LVR-IC	16.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DK	-	XC6701DG8FR	LVR-IC	16.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DL	-	XC6701DG9FR	LVR-IC	16.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DM	-	XC6701DH0FR	LVR-IC	17.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DN	-	XC6701DH1FR	LVR-IC	17.1V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DP	-	XC6701DH2FR	LVR-IC	17.2V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DR	-	XC6701DH3FR	LVR-IC	17.3V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DS	-	XC6701DH4FR	LVR-IC	17.4V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DT	-	XC6701DH5FR	LVR-IC	17.5V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DU	-	XC6701DH6FR	LVR-IC	17.6V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DV	-	XC6701DH7FR	LVR-IC	17.7V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DX	-	XC6701DH8FR	LVR-IC	17.8V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DY	-	XC6701DH9FR	LVR-IC	17.9V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
8DZ	-	XC6701DJ0FR	LVR-IC	18.0V±2%, 150mA	SOT-223	21ch	VR1	4k	Tor
9184D	-	G9184-120T65U	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-223	21eu	VR1	4r	Gmt
9184I	-	G9184-110T65U	LVR-IC	LDO, 1.1V±2%, 500mA	SOT-223	21eu	VR1	4r	Gmt
9184J	-	G9184-115T65U	LVR-IC	LDO, 1.15V±2%, 500mA	SOT-223	21eu	VR1	4r	Gmt
9407A	-	CHM9407AZPT	p-MOSFET	GP, 60V, 3.7A, 3W, Rds=0.15Ω(3.1A)	SOT-223	21fh	-	4r	Chm
9435Z	-	CHT9435ZPT	Si-pnp	AF, Sw, 30V, 3A, B=125..220, 110MHz	SOT-223	21tb	-	4r	Chm
953	-	TFL953	Si-pnp	AF, GP, 100V, 5A, 3W, B=100..300, 120MHz	SOT-223	21tb	-	4q	Tfr
955	-	TFL955	Si-pnp	AF, GP, 140V, 4A, 3W, B=150..300, 110MHz	SOT-223	21tb	-	4q	Tfr
9575	-	SSM9575	p-MOSFET	Sw, 60V, 4A, 3W, Rds=90mΩ(4A), 12/68ns	SOT-223	21fi	-	4rb	Sec
9971	-	SSM9971	n-MOSFET	Sw, 60V, 5A, 2.7W, Rds=50mΩ(5A), 9.6/30ns	SOT-223	21fi	-	4rb	Sec
A42	-	PZTA42	Si-npn	Vid, 300/300V, 500mA, 2W, B>25, >50MHz	SOT-223	21tm	-	4r	Wtr
A8819AB	id	AME8819AEGT330Z	LVR-IC	LDO, 3.3V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
A8819AC	id	AME8819AEGT310Z	LVR-IC	LDO, 3.1V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
A8819AD	id	AME8819AEGT300Z	LVR-IC	LDO, 3.0V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
A8819AG	id	AME8819AEGT250Z	LVR-IC	LDO, 2.5V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
A8819AI	id	AME8819AEGT180Z	LVR-IC	LDO, 1.8V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
A8819AJ	id	AME8819AEGT150Z	LVR-IC	LDO, 1.5V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
A8819AK	id	AME8819AEGT120Z	LVR-IC	LDO, 1.2V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
A8819BB	id	AME8819BEGT330Z	LVR-IC	LDO, 3.3V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
A8819BD	id	AME8819BEGT300Z	LVR-IC	LDO, 3.0V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
A8819BG	id	AME8819BEGT250Z	LVR-IC	LDO, 2.5V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
A8819BI	id	AME8819BEGT180Z	LVR-IC	LDO, 1.8V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
A8819BJ	id	AME8819BEGT150Z	LVR-IC	LDO, 1.5V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
A8819BK	id	AME8819BEGT120Z	LVR-IC	LDO, 1.2V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
A8827AB	-	AME8827-AGT330	LVR-IC	LDO, 3.3V±1.5%, 1A	SOT-223	21eu	VR1	4q	Ame
A8827AG	-	AME8827-AGT250	LVR-IC	LDO, 2.5V±1.5%, 1A	SOT-223	21eu	VR1	4q	Ame
A8827AI	-	AME8827-AGT180	LVR-IC	LDO, 1.8V±1.5%, 1A	SOT-223	21eu	VR1	4q	Ame
A8827AK	-	AME8827-AGT120	LVR-IC	LDO, 1.2V±1.5%, 1A	SOT-223	21eu	VR1	4q	Ame
A8827EB	-	AME8827-BGT330	LVR-IC	LDO, 3.3V±1.5%, 1A	SOT-223	21cq	VR1	4q	Ame
A8827EG	-	AME8827-BGT250	LVR-IC	LDO, 2.5V±1.5%, 1A	SOT-223	21cq	VR1	4q	Ame
A8827EI	-	AME8827-BGT180	LVR-IC	LDO, 1.8V±1.5%, 1A	SOT-223	21cq	VR1	4q	Ame
A8827EJ	-	AME8827-BGT150	LVR-IC	LDO, 1.5V±1.5%, 1A	SOT-223	21cq	VR1	4q	Ame
A8827EK	-	AME8827-BGT120	LVR-IC	LDO, 1.2V±1.5%, 1A	SOT-223	21cq	VR1	4q	Ame
A94	-	PZTA94	Si-pnp	HV, 400V, 500mA, 2W, B=50..300	SOT-223	21tm	-	4rb	Sec
AA	-	BCP51	Si-pnp	AF, 45V, 1A, 1.3W, B=63..250, 115MHz	SOT-223	21tm	-	4k	Phi
AC	-	BCP51-10	Si-pnp	AF, 45V, 1A, 1.3W, B=63..160, 115MHz	SOT-223	21tm	-	4k	Phi
AD	-	BCP51-16	Si-pnp	AF, 45V, 1A, 1.3W, B=100, 250, 115MHz	SOT-223	21tm	-	4k	Phi
ADB	-	AME8805AEGT	LVR-IC	LDO, 3.3V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ADB	id	AME8805AEGTZ	LVR-IC	LDO, 3.3V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
ADC	-	AME8805BEGT	LVR-IC	LDO, 3.0V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
ADC	id	AME8805BEGTZ	LVR-IC	LDO, 3.0V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
ADD	-	AME8805CEGT	LVR-IC	LDO, 2.8V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
ADD	id	AME8805CEGTZ	LVR-IC	LDO, 2.8V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
ADE	-	AME8805DEGT	LVR-IC	LDO, 2.5V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
ADE	id	AME8805DEGTZ	LVR-IC	LDO, 2.5V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
ADF	-	AME8805EEGT	LVR-IC	LDO, 3.8V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
ADF	id	AME8805EEGTZ	LVR-IC	LDO, 3.8V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
ADH	-	AME8805GEGT	LVR-IC	LDO, 3.5V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
ADH	id	AME8805GEGTZ	LVR-IC	LDO, 3.5V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AE	-	BCP52	Si-pnp	AF, 60V, 1A, 1.3W, B=63..250, 115MHz	SOT-223	21tm	-	4k	Phi
AE	-	TSB1424ACW	Si-pnp	Lo-sat, 50V, 30A, 500mW, B=180..560, 240MHz	SOT-223	21tm	-	4k	Tsc
AEJ	-	AME8805HEGT	LVR-IC	LDO, 2.7V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AEJ	id	AME8805HEGTZ	LVR-IC	LDO, 2.7V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AER	-	AME8805IEGT	LVR-IC	LDO, 3.4V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AER	id	AME8805IEGTZ	LVR-IC	LDO, 3.4V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AET	-	AME8808AEGT	LVR-IC	LDO, 3.3V±1.5%, 750mA	SOT-223	21cq	VR1	4q	Ame
AET	id	AME8808AEGTZ	LVR-IC	LDO, 3.3V±1.5%, 750mA	SOT-223	21cq	VR1	4q	Ame
AEU	id	AME8808BEGTZ	LVR-IC	LDO, 3.0V±1.5%, 750mA	SOT-223	21cq	VR1	4q	Ame
AEV	id	AME8808CEGTZ	LVR-IC	LDO, 2.8V±1.5%, 750mA	SOT-223	21cq	VR1	4q	Ame
AEW	id	AME8808DEGTZ	LVR-IC	LDO, 2.5V±1.5%, 750mA	SOT-223	21cq	VR1	4q	Ame
AEX	id	AME8808EEGTZ	LVR-IC	LDO, 3.8V±1.5%, 750mA	SOT-223	21cq	VR1	4q	Ame
AEY	id	AME8808FEGTZ	LVR-IC	LDO, 3.6V±1.5%, 750mA	SOT-223	21cq	VR1	4q	Ame
AEZ	id	AME8808GEGTZ	LVR-IC	LDO, 3.5V±1.5%, 750mA	SOT-223	21cq	VR1	4q	Ame
AFA	id	AME8808HEGTZ	LVR-IC	LDO, 2.7V±1.5%, 750mA	SOT-223	21cq	VR1	4q	Ame
AFB	id	AME8808IEGTZ	LVR-IC	LDO, 3.4V±1.5%, 750mA	SOT-223	21cq	VR1	4q	Ame
AG	-	BCP52-10	Si-pnp	AF, 60V, 1A, 1.3W, B=63..160, 115MHz	SOT-223	21tm	-	4k	Phi
AGT	-	AME8805JEGT	LVR-IC	LDO, 2.85V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AGT	id	AME8805JEGTZ	LVR-IC	LDO, 2.85V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AGU	id	AME8808JEGTZ	LVR-IC	LDO, 2.85V±1.5%, 750mA	SOT-223	21cq	VR1	4q	Ame
AH	-	BCP53	Si-pnp	AF, 100V, 1A, 1.3W, B=63..250, 115MHz	SOT-223	21tm	-	4k	Ons
AH	-	BCP53T1	Si-pnp	AF, 100V, 1A, 1.3W, B=40..250, 115MHz	SOT-223	21tm	-	4k	Ons
AH-10	-	BCP53-10	Si-pnp	AF, 100V, 1.5A, 1.5W, B=63..160, 115MHz	SOT-223	21tm	-	4s	Ons
AH-10	-	BCP53-10T1	Si-pnp	AF, 100V, 1.5A, 1.5W, B=63..160, 115MHz	SOT-223	21tm	-	4s	Ons
AH-16	-	BCP53-16	Si-pnp	AF, 100V, 1.5A, 1.5W, B=100..250, 115MHz	SOT-223	21tm	-	4s	Ons
AH-16	-	BCP53-16T1	Si-pnp	AF, 100V, 1.5A, 1.5W, B=100..250, 115MHz	SOT-223	21tm	-	4s	Ons
AHV	-	AME8805KEGT	LVR-IC	LDO, 3.7V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AHV	id	AME8805KEGTZ	LVR-IC	LDO, 3.7V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AHW	id	AME8808KEGTZ	LVR-IC	LDO, 3.7V±1.5%, 750mA	SOT-223	21cq	VR1	4q	Ame
AJ	-	TFL56	Si-npn	AF, GP, 80V, 1A, 2W, B=100..400, 125MHz	SOT-223	21tb	-	4q	Tfr
AJ16	-	TFL56-16	Si-npn	AF, GP, 80V, 1A, 2W, B=100..250, 125MHz	SOT-223	21tb	-	4q	Tfr
AJ25	-	TFL56-25	Si-npn	AF, GP, 80V, 1A, 2W, B=160..400, 125MHz	SOT-223	21tb	-	4q	Tfr
AJG	id	AME8808LEGTZ	LVR-IC	LDO, 1.5V±1.5%, 750mA	SOT-223	21cq	VR1	4q	Ame
AJH	id	AME8808MEGTZ	LVR-IC	LDO, 1.8V±1.5%, 750mA	SOT-223	21cq	VR1	4q	Ame
AJI	-	AME8805LEGT	LVR-IC	LDO, 1.5V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AJI	id	AME8805LEGTZ	LVR-IC	LDO, 1.5V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AJJ	-	AME8805MEGT	LVR-IC	LDO, 1.8V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AJJ	id	AME8805MEGTZ	LVR-IC	LDO, 1.8V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AJY	-	AME8815BEGT150	LVR-IC	LDO, 1.50V±1.5%, 1.5A	SOT-223	21cq	VR1	4q	Ame
AJY	id	AME8815BEGT150Z	LVR-IC	LDO, 1.50V±1.5%, 1.5A	SOT-223	21cq	VR1	4q	Ame
AJZ	-	AME8815BEGT180	LVR-IC	LDO, 1.80V±1.5%, 1.5A	SOT-223	21cq	VR1	4q	Ame
AJZ	id	AME8815BEGT180Z	LVR-IC	LDO, 1.80V±1.5%, 1.5A	SOT-223	21cq	VR1	4q	Ame
AK	-	BCP53-10	Si-pnp	AF, 100V, 1A, 1.3W, B=63..160, 115MHz	SOT-223	21tm	-	4k	Phi
AK	-	TFL53	Si-pnp	AF, GP, 80V, 1A, 2W, B=100..400, 125MHz	SOT-223	21tb	-	4q	Tfr
AK16	-	TFL53-16	Si-pnp	AF, GP, 80V, 1A, 2W, B=100..250, 125MHz	SOT-223	21tb	-	4q	Tfr
AK25	-	TFL53-25	Si-pnp	AF, GP, 80V, 1A, 2W, B=160..400, 125MHz	SOT-223	21tb	-	4q	Tfr
AKB	-	AME8815BEGT250	LVR-IC	LDO, 2.50V±1.5%, 1.5A	SOT-223	21cq	VR1	4q	Ame
AKB	id	AME8815BEGT250Z	LVR-IC	LDO, 2.50V±1.5%, 1.5A	SOT-223	21cq	VR1	4q	Ame
AKC	-	AME8815AEGT330	LVR-IC	LDO, 3.30V±1.5%, 1.5A	SOT-223	21eu	VR1	4q	Ame
AKC	id	AME8815AEGT330Z	LVR-IC	LDO, 3.30V±1.5%, 1.5A	SOT-223	21eu	VR1	4q	Ame
AKD	-	AME8815BEGT330	LVR-IC	LDO, 3.30V±1.5%, 1.5A	SOT-223	21cq	VR1	4q	Ame
AKD	id	AME8815BEGT330Z	LVR-IC	LDO, 3.30V±1.5%, 1.5A	SOT-223	21cq	VR1	4q	Ame
AKS	-	AME8805NEGT	LVR-IC	LDO, 2.9V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AKS	id	AME8805NEGTZ	LVR-IC	LDO, 2.9V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AKT	-	AME8805OEGT	LVR-IC	LDO, 3.1V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AKT	id	AME8805OEGTZ	LVR-IC	LDO, 3.1V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AKU	id	AME8808NEGTZ	LVR-IC	LDO, 2.9V±1.5%, 750mA	SOT-223	21cq	VR1	4q	Ame
AKV	id	AME8808OEGTZ	LVR-IC	LDO, 3.1V±1.5%, 750mA	SOT-223	21cq	VR1	4q	Ame
AL	-	BCP53-16	Si-pnp	AF, 100V, 1A, 1.3W, B=100..250, 115MHz	SOT-223	21tm	-	4k	Phi

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AM	-	BCP52-16	Si-pnp	AF, 60V, 1A, 1.3W, B=100..250, 115MHz	SOT-223	21tm	-	4k	Phi
AMN	-	AME8815BEGT475	LVR-IC	LDO, 4.75V±1.5%, 1.5A	SOT-223	21cq	VR1	4q	Ame
AMN	id	AME8815BEGT475Z	LVR-IC	LDO, 4.75V±1.5%, 1.5A	SOT-223	21cq	VR1	4q	Ame
APR	-	AME8815AEGT250	LVR-IC	LDO, 2.50V±1.5%, 1.5A	SOT-223	21eu	VR1	4q	Ame
APR	id	AME8815AEGT250Z	LVR-IC	LDO, 2.50V±1.5%, 1.5A	SOT-223	21eu	VR1	4q	Ame
AQQ	-	AME8815BEGT390	LVR-IC	LDO, 3.90V±1.5%, 1.5A	SOT-223	21cq	VR1	4q	Ame
AQQ	id	AME8815BEGT390Z	LVR-IC	LDO, 3.90V±1.5%, 1.5A	SOT-223	21cq	VR1	4q	Ame
AQR	-	AME8815AEGT475	LVR-IC	LDO, 4.75V±1.5%, 1.5A	SOT-223	21eu	VR1	4q	Ame
AQR	id	AME8815AEGT475Z	LVR-IC	LDO, 4.75V±1.5%, 1.5A	SOT-223	21eu	VR1	4q	Ame
AQS	-	AME8815AEGT500	LVR-IC	LDO, 5.00V±1.5%, 1.5A	SOT-223	21eu	VR1	4q	Ame
AQS	id	AME8815AEGT500Z	LVR-IC	LDO, 5.00V±1.5%, 1.5A	SOT-223	21eu	VR1	4q	Ame
AQT	-	AME8815BEGT500	LVR-IC	LDO, 5.00V±1.5%, 1.5A	SOT-223	21cq	VR1	4q	Ame
AQT	id	AME8815BEGT500Z	LVR-IC	LDO, 5.00V±1.5%, 1.5A	SOT-223	21cq	VR1	4q	Ame
AQU	-	AME8815AEGT180	LVR-IC	LDO, 1.80V±1.5%, 1.5A	SOT-223	21eu	VR1	4q	Ame
AQU	id	AME8815AEGT180Z	LVR-IC	LDO, 1.80V±1.5%, 1.5A	SOT-223	21eu	VR1	4q	Ame
AS3	-	BSP52T1	Si-npn-Darl	AF, Sw, 90V, 1A, 800mW, B>1000	SOT-223	21tm	-	4s	Ons
ASP	-	AME8815AEGT150	LVR-IC	LDO, 1.50V±1.5%, 1.5A	SOT-223	21eu	VR1	4q	Ame
ASP	id	AME8815AEGT150Z	LVR-IC	LDO, 1.50V±1.5%, 1.5A	SOT-223	21eu	VR1	4q	Ame
AT120A	-	BAT120A	Si-diode	Dual, Schottky, Fast, 25V, 1A, Vf<0.45V(1A), <300µs	SOT-223	21bt	-	4k	Phi
AT120C	-	BAT120C	Si-diode	Dual, Schottky, Fast, 25V, 1A, Vf<0.45V(1A), <300µs	SOT-223	21bu	-	4k	Phi
AT120S	-	BAT120S	Si-diode	Dual, Schottky, Fast, 25V, 1A, Vf<0.45V(1A), <300µs	SOT-223	21bv	-	4k	Phi
AT140A	-	BAT140A	Si-diode	Dual, Schottky, Fast, 40V, 1A, Vf<0.5V(1A), <300µs	SOT-223	21bt	-	4k	Phi
AT140C	-	BAT140C	Si-diode	Dual, Schottky, Fast, 40V, 1A, Vf<0.5V(1A), <300µs	SOT-223	21bu	-	4k	Phi
AT140S	-	BAT140S	Si-diode	Dual, Schottky, Fast, 40V, 1A, Vf<0.5V(1A), <300µs	SOT-223	21bv	-	4k	Phi
AT160A	-	BAT160A	Si-diode	Dual, Schottky, Fast, 60V, 1A, Vf<0.65V(1A), <300µs	SOT-223	21bt	-	4k	Phi
AT160C	-	BAT160C	Si-diode	Dual, Schottky, Fast, 60V, 1A, Vf<0.65V(1A), <300µs	SOT-223	21bu	-	4k	Phi
AT160S	-	BAT160S	Si-diode	Dual, Schottky, Fast, 60V, 1A, Vf<0.65V(1A), <300µs	SOT-223	21bv	-	4k	Phi
AV2	-	TFL1236A	Si-pnp	HV, 160V, 1.5A, 5W, B=60..200, 140MHz	SOT-223	21tb	-	4q	Tfr
AV2K	-	TFL1236AK	Si-pnp	HV, 160V, 1.5A, 5W, B=60..120, 140MHz	SOT-223	21tb	-	4q	Tfr
AV2P	-	TFL1236AP	Si-pnp	HV, 160V, 1.5A, 5W, B=80..190, 140MHz	SOT-223	21tb	-	4q	Tfr
AV2Q	-	TFL1236AQ	Si-pnp	HV, 160V, 1.5A, 5W, B=120..200, 140MHz	SOT-223	21tb	-	4q	Tfr
AWF	-	AME8843AEGT250	LVR-IC	LDO, 2.5V±1.5%, 750mA	SOT-223	21eu	VR1	4q	Ame
AWF	id	AME8843AEGT250Z	LVR-IC	LDO, 2.5V±1.5%, 750mA	SOT-223	21eu	VR1	4q	Ame
AWL	-	AME88051EGT	LVR-IC	LDO, 1.3V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AWL	id	AME88051EGTZ	LVR-IC	LDO, 1.3V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
AWZ	-	AME8843AEGT180	LVR-IC	LDO, 1.8V±1.5%, 750mA	SOT-223	21eu	VR1	4q	Ame
AWZ	id	AME8843AEGT180Z	LVR-IC	LDO, 1.8V±1.5%, 750mA	SOT-223	21eu	VR1	4q	Ame
AZ18	-	AIC1740-18	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-223	21ch	VR1	4r	Aic
AZ20	-	AIC1740-20	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-223	21ch	VR1	4r	Aic
AZ25	-	AIC1740-25	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-223	21ch	VR1	4r	Aic
AZ27	-	AIC1740-27	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-223	21ch	VR1	4r	Aic
AZ30	-	AIC1740-30	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-223	21ch	VR1	4r	Aic
AZS	-	AME8845AEGT250	LVR-IC	LDO, 2.50V±1.5%, 3A	SOT-223	21eu	VR1	4q	Ame
AZS	id	AME8845AEGT250Z	LVR-IC	LDO, 2.50V±1.5%, 3A	SOT-223	21eu	VR1	4q	Ame
B1424	-	TFLB1424	Si-pnp	AF, GP, 50V, 3A, B=120..560, 240MHz	SOT-223	21tb	-	4q	Tfr
B1424Q	-	TFLB1424Q	Si-pnp	AF, GP, 50V, 3A, B=120..270, 240MHz	SOT-223	21tb	-	4q	Tfr
B1424R	-	TFLB1424R	Si-pnp	AF, GP, 50V, 3A, B=180..390, 240MHz	SOT-223	21tb	-	4q	Tfr
B1424S	-	TFLB1424S	Si-pnp	AF, GP, 50V, 3A, B=270..560, 240MHz	SOT-223	21tb	-	4q	Tfr
BA	-	BCP54	Si-npn	AF, 45V, 1A, 1.3W, B=63..250, 115MHz	SOT-223	21tm	-	4k	Phi
BAY	-	AME8815AEGT190	LVR-IC	LDO, 1.90V±1.5%, 1.5A	SOT-223	21eu	VR1	4q	Ame
BAY	id	AME8815AEGT190Z	LVR-IC	LDO, 1.90V±1.5%, 1.5A	SOT-223	21eu	VR1	4q	Ame
BAZ	-	AME8845AEGT180	LVR-IC	LDO, 1.80V±1.5%, 3A	SOT-223	21eu	VR1	4q	Ame
BAZ	id	AME8845AEGT180Z	LVR-IC	LDO, 1.80V±1.5%, 3A	SOT-223	21eu	VR1	4q	Ame
BC	-	BCP54-10	Si-npn	AF, 45V, 1A, 1.3W, B=63..160, 115MHz	SOT-223	21tm	-	4k	Phi
BCI	id	AME8805YEGTZ	LVR-IC	LDO, 1.9V±1.5%, 600mA	SOT-223	21eu	VR1	4q	Ame
BCP56	-	CHT3019ZPT	Si-npn	AF, Sw, 80V, 1A B=100..300, 100MHz	SOT-223	21tb	-	4r	Chm
BD	-	BCP54-16	Si-npn	AF, 45V, 1A, 1.3W, B=100..250, 115MHz	SOT-223	21tm	-	4k	Phi
BDF	id	AME8845AEGT330Z	LVR-IC	LDO, 3.30V±1.5%, 3A	SOT-223	21eu	VR1	4q	Ame
BE	-	BCP55	Si-npn	AF, 60V, 1A, 1.3W, B=63..250, 115MHz	SOT-223	21tm	-	4k	Phi
BFW	id	AME8847AEGT330Z	LVR-IC	LDO, 3.3V±1.5%, 800mA	SOT-223	21cq	VR1	4q	Ame
BG	-	BCP55-10	Si-npn	AF, 60V, 1A, 1.3W, B=63..160, 115MHz	SOT-223	21tm	-	4k	Phi
BGI	id	AME8845AEGT150Z	LVR-IC	LDO, 1.50V±1.5%, 3A	SOT-223	21eu	VR1	4q	Ame
BH	-	BCP56	Si-npn	AF, 80V, 1A, 1.3W, B=63..250, 115MHz	SOT-223	21tm	-	4k	Phi
BH	-	BCP56T1	Si-npn	AF, 80V, 1A, 1.3W, B=40..250, 115MHz	SOT-223	21tm	-	4s	Ons
BH-10	-	BCP56-10	Si-npn	AF, 80V, 1A, 1.5W, B=63..160, 115MHz	SOT-223	21tm	-	4s	Ons
BH-10	-	BCP56-10T1	Si-npn	AF, 80V, 1A, 1.5W, B=63..160, 115MHz	SOT-223	21tm	-	4s	Ons
BH-16	-	BCP56-16	Si-npn	AF, 80V, 1A, 1.5W, B=100..250, 115MHz	SOT-223	21tm	-	4s	Ons
BH-16	-	BCP56-16T1	Si-npn	AF, 80V, 1A, 1.5W, B=100..250, 115MHz	SOT-223	21tm	-	4s	Ons
BHI	id	AME8847AEGT180Z	LVR-IC	LDO, 1.8V±1.5%, 800mA	SOT-223	21cq	VR1	4q	Ame
BHJ	id	AME8847AEGT250Z	LVR-IC	LDO, 2.5V±1.5%, 800mA	SOT-223	21cq	VR1	4q	Ame





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BK	-	BCP56-10	Si-npn	AF, 80V, 1A, 1.3W, B=63..160, 115MHz	SOT-223	21tm	-	4k	Phi
BL	-	BCP56-16	Si-npn	AF, 80V, 1A, 1.3W, B=100..250, 115MHz	SOT-223	21tm	-	4k	Phi
BLI	id	AME8848AEGT180Z	LVR-IC	LDO, 1.8V±1.5%, 1A	SOT-223	21eu	VR1	4q	Ame
BLJ	id	AME8848AEGT250Z	LVR-IC	LDO, 2.5V±1.5%, 1A	SOT-223	21eu	VR1	4q	Ame
BLK	id	AME8848AEGT330Z	LVR-IC	LDO, 3.3V±1.5%, 1A	SOT-223	21eu	VR1	4q	Ame
BM	-	BCP55-16	Si-npn	AF, 60V, 1A, 1.3W, B=100..250, 115MHz	SOT-223	21tm	-	4k	Phi
BT2	-	BSP16T1	Si-pnp	AF, Sw, Vid, 350V, 1A, 1.5W, B=30..120, >15MHz	SOT-223	21tm	-	4s	Ons
BU15G	-	AIC1723A-15GY	LVR-IC	LDO, 1.5V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU15P	-	AIC1723A-15PY	LVR-IC	LDO, 1.5V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU18G	-	AIC1723A-18GY	LVR-IC	LDO, 1.8V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU18P	-	AIC1723A-18PY	LVR-IC	LDO, 1.8V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU20G	-	AIC1723A-20GY	LVR-IC	LDO, 2.0V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU20P	-	AIC1723A-20PY	LVR-IC	LDO, 2.0V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU25G	-	AIC1723A-25GY	LVR-IC	LDO, 2.5V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU25P	-	AIC1723A-25PY	LVR-IC	LDO, 2.5V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU27G	-	AIC1723A-27GY	LVR-IC	LDO, 2.7V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU27P	-	AIC1723A-27PY	LVR-IC	LDO, 2.7V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU30G	-	AIC1723A-30GY	LVR-IC	LDO, 3.0V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU30P	-	AIC1723A-30PY	LVR-IC	LDO, 3.0V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU33G	-	AIC1723A-33GY	LVR-IC	LDO, 3.3V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU33P	-	AIC1723A-33PY	LVR-IC	LDO, 3.3V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU35G	-	AIC1723A-35GY	LVR-IC	LDO, 3.5V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU35P	-	AIC1723A-35PY	LVR-IC	LDO, 3.5V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU37G	-	AIC1723A-37GY	LVR-IC	LDO, 3.7V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU37P	-	AIC1723A-37PY	LVR-IC	LDO, 3.7V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU38G	-	AIC1723A-38GY	LVR-IC	LDO, 3.8V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU38P	-	AIC1723A-38PY	LVR-IC	LDO, 3.8V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU50G	-	AIC1723A-50GY	LVR-IC	LDO, 5.0V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU50P	-	AIC1723A-50PY	LVR-IC	LDO, 5.0V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU52G	-	AIC1723A-52GY	LVR-IC	LDO, 5.2V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
BU52P	-	AIC1723A-52PY	LVR-IC	LDO, 5.2V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CA	-	BCP68	Si-npn	AF, 32V, 1A, 1.3W, B=50..375, >40MHz	SOT-223	21tm	-	4k	Phi
CA	-	BCP68T1	Si-npn	AF, 25V, 1A, 1.5W, B=85..375, >40MHz	SOT-223	21tm	-	4s	Ons
CAG	-	AME8815BEGT190Z	LVR-IC	LDO, 1.90V±1.5%, 1.5A	SOT-223	21cq	VR1	4q	Ame
CB	-	BCP68-16	Si-npn	AF, 32V, 1A, 1.3W, B=100..250, >40MHz	SOT-223	21tm	-	4k	Phi
CC	-	BCP68-25	Si-npn	AF, 32V, 1A, 1.3W, B=160..375, >40MHz	SOT-223	21tm	-	4k	Phi
CC15	-	AIC1735-15CY	LVR-IC	LDO, 1.5V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC15G	-	AIC1735-15GY	LVR-IC	LDO, 1.5V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC15P	-	AIC1735-15PY	LVR-IC	LDO, 1.5V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC18	-	AIC1735-18CY	LVR-IC	LDO, 1.8V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC18G	-	AIC1735-18GY	LVR-IC	LDO, 1.8V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC18P	-	AIC1735-18PY	LVR-IC	LDO, 1.8V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC18P	-	SS6735-18GY	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-223	21ch	VR1	4r	Ssc
CC20	-	AIC1735-20CY	LVR-IC	LDO, 2.0V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC20G	-	AIC1735-20GY	LVR-IC	LDO, 2.0V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC20P	-	AIC1735-20PY	LVR-IC	LDO, 2.0V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC20P	-	SS6735-20GY	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-223	21ch	VR1	4r	Ssc
CC25	-	AIC1735-25CY	LVR-IC	LDO, 2.5V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC25G	-	AIC1735-25GY	LVR-IC	LDO, 2.5V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC25P	-	AIC1735-25PY	LVR-IC	LDO, 2.5V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC25P	-	SS6735-25GY	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-223	21ch	VR1	4r	Ssc
CC27	-	AIC1735-27CY	LVR-IC	LDO, 2.7V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC27G	-	AIC1735-27GY	LVR-IC	LDO, 2.7V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC27P	-	AIC1735-27PY	LVR-IC	LDO, 2.7V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC27P	-	SS6735-27GY	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-223	21ch	VR1	4r	Ssc
CC30	-	AIC1735-30CY	LVR-IC	LDO, 3.0V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC30G	-	AIC1735-30GY	LVR-IC	LDO, 3.0V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC30P	-	AIC1735-30PY	LVR-IC	LDO, 3.0V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC30P	-	SS6735-30GY	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-223	21ch	VR1	4r	Ssc
CC33	-	AIC1735-33CY	LVR-IC	LDO, 3.3V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC33G	-	AIC1735-33GY	LVR-IC	LDO, 3.3V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC33P	-	AIC1735-33PY	LVR-IC	LDO, 3.3V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC33P	-	SS6735-33GY	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-223	21ch	VR1	4r	Ssc
CC35	-	AIC1735-35CY	LVR-IC	LDO, 3.5V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC35G	-	AIC1735-35GY	LVR-IC	LDO, 3.5V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC35P	-	AIC1735-35PY	LVR-IC	LDO, 3.5V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC35P	-	SS6735-35GY	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-223	21ch	VR1	4r	Ssc
CC37	-	AIC1735-37CY	LVR-IC	LDO, 3.7V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC37G	-	AIC1735-37GY	LVR-IC	LDO, 3.7V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC37P	-	AIC1735-37PY	LVR-IC	LDO, 3.7V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CC37P	-	SS6735-37GY	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-223	21ch	VR1	4r	Ssc
CC38	-	AIC1735-38CY	LVR-IC	LDO, 3.8V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC38G	-	AIC1735-38GY	LVR-IC	LDO, 3.8V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC38P	-	AIC1735-38PY	LVR-IC	LDO, 3.8V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC38P	-	SS6735-38GY	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-223	21ch	VR1	4r	Ssc
CC50	-	AIC1735-50CY	LVR-IC	LDO, 5.0V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC50G	-	AIC1735-50GY	LVR-IC	LDO, 5.0V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC50P	-	AIC1735-50PY	LVR-IC	LDO, 5.0V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC50P	-	SS6735-50GY	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-223	21ch	VR1	4r	Ssc
CC52	-	AIC1735-52CY	LVR-IC	LDO, 5.2V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC52G	-	AIC1735-52GY	LVR-IC	LDO, 5.2V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC52P	-	AIC1735-52PY	LVR-IC	LDO, 5.2V±1%, 500mA	SOT-223	21ch	VR1	4k	Aic
CC52P	-	SS6735-52GY	LVR-IC	LDO, 5.2V±2%, 500mA	SOT-223	21ch	VR1	4r	Ssc
CE	-	BCP69	Si-pnp	AF, 32V, 1A, 1.3W, B=100..375, >40MHz	SOT-223	21tm	-	4k	Phi
CE	-	BCP69T1	Si-pnp	AF, 25V, 1A, 1.5W, B=85..375, >40MHz	SOT-223	21tm	-	4s	Ons
CE	-	TFL2568	Si-npn	Vid, 400V, 300mA 5W, B=100..250, 50MHz	SOT-223	21tb	-	4q	Tfr
CF	-	BCP69-16	Si-pnp	AF, 32V, 1A, 1.3W, B=100..250, >40MHz	SOT-223	21tm	-	4k	Phi
CF	-	TFLD2150	Si-npn	AF, GP, 50V 3A, 5W, B=120..560, 90MHz	SOT-223	21tb	-	4q	Tfr
CFQ	-	TFLD2150Q	Si-npn	AF, GP, 50V 3A, 5W, B=120..270, 90MHz	SOT-223	21tb	-	4q	Tfr
CFR	-	TFLD2150R	Si-npn	AF, GP, 50V 3A, 5W, B=180..390, 90MHz	SOT-223	21tb	-	4q	Tfr
CFS	-	TFLD2150S	Si-npn	AF, GP, 50V 3A, 5W, B=270..560, 90MHz	SOT-223	21tb	-	4q	Tfr
CG	-	BCP69-25	Si-pnp	AF, 32V, 1A, 1.3W, B=160..375, >40MHz	SOT-223	21tm	-	4k	Phi
CHP69	-	CHP69PT	Si-pnp	AF, Sw, 20V, 1A, B=85..375, 40MHz	SOT-223	21tb	-	4r	Chm
DA	-	BF722	Si-npn	Vid, 250V, 100mA, 1.2W, B>50, >60MHz	SOT-223	21tb	-	4k	Phi
DB	-	BF723	Si-pnp	Vid, 250V, 100mA, 1.2W, B>50, >60MHz	SOT-223	21tb	-	4k	Phi
DC	-	BF720	Si-npn	Vid, 300V, 100mA, 1.5W, B>50, >60MHz	SOT-223	21tb	-	4s	Ons
DF	-	BF721	Si-pnp	Vid, 300V, 100mA, 1.5W, B>50, >60MHz	SOT-223	21tb	-	4s	Ons
DQ	-	TFL1857A	Si-npn	HV, 160V, 1.5A, 5W, B=82..390, 140MHz	SOT-223	21tb	-	4q	Tfr
F2K	-	LN6203E182F	LVR-IC	LDO, 1.8V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F2L	-	LN6203E192F	LVR-IC	LDO, 1.9V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F2M	-	LN6203E202F	LVR-IC	LDO, 2.0V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F2N	-	LN6203E212F	LVR-IC	LDO, 2.1V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F2P	-	LN6203E222F	LVR-IC	LDO, 2.2V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F2R	-	LN6203E232F	LVR-IC	LDO, 2.3V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F2S	-	LN6203E242F	LVR-IC	LDO, 2.4V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F2T	-	LN6203E252F	LVR-IC	LDO, 2.5V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F2U	-	LN6203E262F	LVR-IC	LDO, 2.6V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F2V	-	LN6203E272F	LVR-IC	LDO, 2.7V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F2X	-	LN6203E282F	LVR-IC	LDO, 2.8V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F2Y	-	LN6203E292F	LVR-IC	LDO, 2.9V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F2Z	-	LN6203E302F	LVR-IC	LDO, 3.0V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F30	-	LN6203E312F	LVR-IC	LDO, 3.1V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F31	-	LN6203E322F	LVR-IC	LDO, 3.2V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F32	-	LN6203E332F	LVR-IC	LDO, 3.3V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F33	-	LN6203E342F	LVR-IC	LDO, 3.4V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F34	-	LN6203E352F	LVR-IC	LDO, 3.5V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F35	-	LN6203E362F	LVR-IC	LDO, 3.6V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F36	-	LN6203E372F	LVR-IC	LDO, 3.7V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F37	-	LN6203E382F	LVR-IC	LDO, 3.8V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F38	-	LN6203E392F	LVR-IC	LDO, 3.9V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F39	-	LN6203E402F	LVR-IC	LDO, 4.0V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3A	-	LN6203E412F	LVR-IC	LDO, 4.1V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3B	-	LN6203E422F	LVR-IC	LDO, 4.2V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3C	-	LN6203E432F	LVR-IC	LDO, 4.3V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3D	-	LN6203E442F	LVR-IC	LDO, 4.4V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3E	-	LN6203E452F	LVR-IC	LDO, 4.5V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3F	-	LN6203E462F	LVR-IC	LDO, 4.6V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3H	-	LN6203E472F	LVR-IC	LDO, 4.7V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3K	-	LN6203E482F	LVR-IC	LDO, 4.8V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3L	-	LN6203E492F	LVR-IC	LDO, 4.9V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3M	-	LN6203E502F	LVR-IC	LDO, 5.0V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3N	-	LN6203E512F	LVR-IC	LDO, 5.1V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3P	-	LN6203E522F	LVR-IC	LDO, 5.2V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3R	-	LN6203E532F	LVR-IC	LDO, 5.3V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3S	-	LN6203E542F	LVR-IC	LDO, 5.4V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3T	-	LN6203E552F	LVR-IC	LDO, 5.5V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3U	-	LN6203E562F	LVR-IC	LDO, 5.6V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3V	-	LN6203E572F	LVR-IC	LDO, 5.7V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3X	-	LN6203E582F	LVR-IC	LDO, 5.8V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F3Y	-	LN6203E592F	LVR-IC	LDO, 5.9V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F3Z	-	LN6203E602F	LVR-IC	LDO, 6.0V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F4	-	LN6203E2A2F	LVR-IC	LDO, 2.85V±2%, 400mA	SOT-223	21vl	VR1	4k	Inw
F5K	-	LN6203P182F	LVR-IC	LDO, 1.8V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F5L	-	LN6203P192F	LVR-IC	LDO, 1.9V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F5M	-	LN6203P202F	LVR-IC	LDO, 2.0V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F5N	-	LN6203P212F	LVR-IC	LDO, 2.1V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F5P	-	LN6203P222F	LVR-IC	LDO, 2.2V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F5R	-	LN6203P232F	LVR-IC	LDO, 2.3V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F5S	-	LN6203P242F	LVR-IC	LDO, 2.4V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F5T	-	LN6203P252F	LVR-IC	LDO, 2.5V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F5U	-	LN6203P262F	LVR-IC	LDO, 2.6V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F5V	-	LN6203P272F	LVR-IC	LDO, 2.7V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F5X	-	LN6203P282F	LVR-IC	LDO, 2.8V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F5Y	-	LN6203P292F	LVR-IC	LDO, 2.9V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F5Z	-	LN6203P302F	LVR-IC	LDO, 3.0V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F60	-	LN6203P312F	LVR-IC	LDO, 3.1V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F61	-	LN6203P322F	LVR-IC	LDO, 3.2V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F62	-	LN6203P332F	LVR-IC	LDO, 3.3V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F63	-	LN6203P342F	LVR-IC	LDO, 3.4V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F64	-	LN6203P352F	LVR-IC	LDO, 3.5V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F65	-	LN6203P362F	LVR-IC	LDO, 3.6V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F66	-	LN6203P372F	LVR-IC	LDO, 3.7V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F67	-	LN6203P382F	LVR-IC	LDO, 3.8V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F68	-	LN6203P392F	LVR-IC	LDO, 3.9V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F69	-	LN6203P402F	LVR-IC	LDO, 4.0V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6A	-	LN6203P412F	LVR-IC	LDO, 4.1V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6B	-	LN6203P422F	LVR-IC	LDO, 4.2V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6C	-	LN6203P432F	LVR-IC	LDO, 4.3V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6D	-	LN6203P442F	LVR-IC	LDO, 4.4V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6E	-	LN6203P452F	LVR-IC	LDO, 4.5V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6F	-	LN6203P462F	LVR-IC	LDO, 4.6V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6H	-	LN6203P472F	LVR-IC	LDO, 4.7V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6K	-	LN6203P482F	LVR-IC	LDO, 4.8V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6L	-	LN6203P492F	LVR-IC	LDO, 4.9V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6M	-	LN6203P502F	LVR-IC	LDO, 5.0V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6N	-	LN6203P512F	LVR-IC	LDO, 5.1V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6P	-	LN6203P522F	LVR-IC	LDO, 5.2V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6R	-	LN6203P532F	LVR-IC	LDO, 5.3V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6S	-	LN6203P542F	LVR-IC	LDO, 5.4V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6T	-	LN6203P552F	LVR-IC	LDO, 5.5V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6U	-	LN6203P562F	LVR-IC	LDO, 5.6V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6V	-	LN6203P572F	LVR-IC	LDO, 5.7V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6X	-	LN6203P582F	LVR-IC	LDO, 5.8V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6Y	-	LN6203P592F	LVR-IC	LDO, 5.9V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F6Z	-	LN6203P602F	LVR-IC	LDO, 6.0V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
F7	-	LN6203P2A2F	LVR-IC	LDO, 2.85V±2%, 400mA, OCL	SOT-223	21vl	VR1	4k	Inw
FT107	-	MMFT107T1	n-MOSFET	TMOS, LogL, 200V, 250mA, 800mW, 14Ω(200mA), 60pF	SOT-223	21f2	-	4q	Mot
FT960	-	MMFT960T1	n-MOSFET	V-MOS, LogL, 60V, 300mA, 800mW, 1.7Ω(1A), Qg=3.2ns	SOT-223	21f2	-	4s	Ons
G1	-	TFL3906	Si-npn	HV, 160V, 600mA, 5W, B=120..390, 100MHz	SOT-223	21tb	-	4q	Tfr
G1Q	-	TFL3906Q	Si-npn	HV, 160V, 600mA, 5W, B=120..270, 100MHz	SOT-223	21tb	-	4q	Tfr
G1R	-	TFL3906R	Si-npn	HV, 160V, 600mA, 5W, B=180..390, 100MHz	SOT-223	21tb	-	4q	Tfr
G953-12	-	SS8053-12	LVR-IC	LDO, 1.2V±2%, 1.5A	SOT-223	21eu	VR1	4t	Ssc
G953-15	-	SS8053-15	LVR-IC	LDO, 1.5V±2%, 1.5A	SOT-223	21eu	VR1	4t	Ssc
G953-18	-	SS8053-18	LVR-IC	LDO, 1.8V±2%, 1.5A	SOT-223	21eu	VR1	4t	Ssc
G953-25	-	SS8053-25	LVR-IC	LDO, 2.5V±2%, 1.5A	SOT-223	21eu	VR1	4t	Ssc
G953-33	-	SS8053-33	LVR-IC	LDO, 3.3V±2%, 1.5A	SOT-223	21eu	VR1	4t	Ssc
GH11B	-	AP2111H-1.2TRG1	LVR-IC	LDO, 1.2V±1.5%, 600mA	SOT-223	21cg	VR1	4r	Bcd
GH11C	-	AP2111H-3.3TRG1	LVR-IC	LDO, 3.3V±1.5%, 600mA	SOT-223	21cg	VR1	4r	Bcd
GH11G	-	AP2111H-1.8TRG1	LVR-IC	LDO, 1.8V±1.5%, 600mA	SOT-223	21cg	VR1	4r	Bcd
GH11H	-	AP2111H-2.5TRG1	LVR-IC	LDO, 2.5V±1.5%, 600mA	SOT-223	21cg	VR1	4r	Bcd
GH13D	-	AP2111H-4.8TRG1	LVR-IC	LDO, 4.5V±1.5%, 600mA	SOT-223	21cg	VR1	4r	Bcd
GK08G	-	AIC1748-08GY3A	LVR-IC	LDO, 0.8V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK09G	-	AIC1748-09GY3A	LVR-IC	LDO, 0.9V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK10G	-	AIC1748-10GY3A	LVR-IC	LDO, 1.0V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK11G	-	AIC1748-11GY3A	LVR-IC	LDO, 1.1V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK12G	-	AIC1748-12GY3A	LVR-IC	LDO, 1.2V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK13G	-	AIC1748-13GY3A	LVR-IC	LDO, 1.3V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK14G	-	AIC1748-14GY3A	LVR-IC	LDO, 1.4V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK15G	-	AIC1748-15GY3A	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK16G	-	AIC1748-16GY3A	LVR-IC	LDO, 1.6V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GK17G	-	AIC1748-17GY3A	LVR-IC	LDO, 1.7V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK18G	-	AIC1748-18GY3A	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK19G	-	AIC1748-19GY3A	LVR-IC	LDO, 1.9V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK20G	-	AIC1748-20GY3A	LVR-IC	LDO, 2.0V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK21G	-	AIC1748-21GY3A	LVR-IC	LDO, 2.1V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK22G	-	AIC1748-22GY3A	LVR-IC	LDO, 2.2V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK23G	-	AIC1748-23GY3A	LVR-IC	LDO, 2.3V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK24G	-	AIC1748-24GY3A	LVR-IC	LDO, 2.4V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK25G	-	AIC1748-25GY3A	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK26G	-	AIC1748-26GY3A	LVR-IC	LDO, 2.6V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK27G	-	AIC1748-27GY3A	LVR-IC	LDO, 2.7V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK28G	-	AIC1748-28GY3A	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK29G	-	AIC1748-29GY3A	LVR-IC	LDO, 2.9V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK2JG	-	AIC1748-285GY3A	LVR-IC	LDO, 2.85V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK30G	-	AIC1748-30GY3A	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK31G	-	AIC1748-31GY3A	LVR-IC	LDO, 3.1V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK32G	-	AIC1748-32GY3A	LVR-IC	LDO, 3.2V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GK33G	-	AIC1748-33GY3A	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-223	21cg	VR1	4r	Aic
GL08G	-	AIC1748-08GY3T	LVR-IC	LDO, 0.8V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL09G	-	AIC1748-09GY3T	LVR-IC	LDO, 0.9V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL10G	-	AIC1748-10GY3T	LVR-IC	LDO, 1.0V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL11G	-	AIC1748-11GY3T	LVR-IC	LDO, 1.1V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL12G	-	AIC1748-12GY3T	LVR-IC	LDO, 1.2V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL13G	-	AIC1748-13GY3T	LVR-IC	LDO, 1.3V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL14G	-	AIC1748-14GY3T	LVR-IC	LDO, 1.4V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL15G	-	AIC1748-15GY3T	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL16G	-	AIC1748-16GY3T	LVR-IC	LDO, 1.6V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL17G	-	AIC1748-17GY3T	LVR-IC	LDO, 1.7V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL18G	-	AIC1748-18GY3T	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL19G	-	AIC1748-19GY3T	LVR-IC	LDO, 1.9V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL20G	-	AIC1748-20GY3T	LVR-IC	LDO, 2.0V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL21G	-	AIC1748-21GY3T	LVR-IC	LDO, 2.1V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL22G	-	AIC1748-22GY3T	LVR-IC	LDO, 2.2V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL23G	-	AIC1748-23GY3T	LVR-IC	LDO, 2.3V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL24G	-	AIC1748-24GY3T	LVR-IC	LDO, 2.4V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL25G	-	AIC1748-25GY3T	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL26G	-	AIC1748-26GY3T	LVR-IC	LDO, 2.6V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL27G	-	AIC1748-27GY3T	LVR-IC	LDO, 2.7V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL28G	-	AIC1748-28GY3T	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL29G	-	AIC1748-29GY3T	LVR-IC	LDO, 2.9V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL2JG	-	AIC1748-285GY3T	LVR-IC	LDO, 2.85V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL30G	-	AIC1748-30GY3T	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL31G	-	AIC1748-31GY3T	LVR-IC	LDO, 3.1V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL32G	-	AIC1748-32GY3T	LVR-IC	LDO, 3.2V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
GL33G	-	AIC1748-33GY3T	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-223	21ch	VR1	4r	Aic
H86A	-	EC1086H-ADJ	LVR-IC	LDO, Adjustable 1.5..5.0V±2%, 1.5A	SOT-223	21cn	VR20	4r	Brw
H86B	-	EC1086H-1.5	LVR-IC	LDO, 1.5V±2%, 1.5A	SOT-223	21cg	VR1	4r	Brw
H86C	-	EC1086H-2.5	LVR-IC	LDO, 2.5V±2%, 1.5A	SOT-223	21cg	VR1	4r	Brw
H86D	-	EC1086H-3.3	LVR-IC	LDO, 3.3V±2%, 1.5A	SOT-223	21cg	VR1	4r	Brw
H86E	-	EC1086H-1.8	LVR-IC	LDO, 1.8V±2%, 1.5A	SOT-223	21cg	VR1	4r	Brw
H86F	-	EC1086H-5.0	LVR-IC	LDO, 5.0V±2%, 1.5A	SOT-223	21cg	VR1	4r	Brw
H86G	-	EC1086H-3.0	LVR-IC	LDO, 3.0V±2%, 1.5A	SOT-223	21cg	VR1	4r	Brw
HB08G	-	AIC1190-08GY3	LVR-IC	LDO, 0.8V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB08P	-	AIC1190-08PY3	LVR-IC	LDO, 0.8V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB10G	-	AIC1190-10GY3	LVR-IC	LDO, 1.0V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB10P	-	AIC1190-10PY3	LVR-IC	LDO, 1.0V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB12G	-	AIC1190-12GY3	LVR-IC	LDO, 1.2V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB12P	-	AIC1190-12PY3	LVR-IC	LDO, 1.2V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB15G	-	AIC1190-15GY3	LVR-IC	LDO, 1.5V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB15P	-	AIC1190-15PY3	LVR-IC	LDO, 1.5V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB18G	-	AIC1190-18GY3	LVR-IC	LDO, 1.8V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB18P	-	AIC1190-18PY3	LVR-IC	LDO, 1.8V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB20G	-	AIC1190-20GY3	LVR-IC	LDO, 2.0V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB20P	-	AIC1190-20PY3	LVR-IC	LDO, 2.0V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB25G	-	AIC1190-25GY3	LVR-IC	LDO, 2.5V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB25P	-	AIC1190-25PY3	LVR-IC	LDO, 2.5V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB27G	-	AIC1190-27GY3	LVR-IC	LDO, 2.7V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB27P	-	AIC1190-27PY3	LVR-IC	LDO, 2.7V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB30G	-	AIC1190-30GY3	LVR-IC	LDO, 3.0V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB30P	-	AIC1190-30PY3	LVR-IC	LDO, 3.0V±2%, 1A	SOT-223	21hn	VR1	4r	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HB33G	-	AIC1190-33GY3	LVR-IC	LDO, 3.3V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB33P	-	AIC1190-33PY3	LVR-IC	LDO, 3.3V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB35G	-	AIC1190-35GY3	LVR-IC	LDO, 3.5V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB35P	-	AIC1190-35PY3	LVR-IC	LDO, 3.5V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB37G	-	AIC1190-37GY3	LVR-IC	LDO, 3.7V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB37P	-	AIC1190-37PY3	LVR-IC	LDO, 3.7V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB38G	-	AIC1190-38GY3	LVR-IC	LDO, 3.8V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HB38P	-	AIC1190-38PY3	LVR-IC	LDO, 3.8V±2%, 1A	SOT-223	21hn	VR1	4r	Aic
HD1	-	HDP01-0512N	Lin-IC	HDD/FDD/CD-R Power supply protection 5V/12V	SOT-223	21	-	4r	Ste
K1P	-	DZT2222A	Si-npn	AF, 75V, 600mA, 1W, B=100..300, 300MHz	SOT-223	21tm	-	4ma	Di
K2F	-	DZT2907A	Si-pnp	AF, 60V, 600mA, 1W, B=100..300, 200MHz	SOT-223	21tm	-	4ma	Di
L0EB	-	LM2940IMP-9.0	LVR-IC	LDO, 9V±2%, 1A	SOT-223	21hn	VR1	4k	Nsc
L3	-	LM317DCY	LVR-IC	LDO, Adjustable 3..37V, 1.5A	SOT-223	21wc	VR20	4r	Ti
L52B	-	LM3940IMP-3.3	LVR-IC	LDO, 3.3V±1%, 1A	SOT-223	21hn	VR1	4q	Nsc
L53B	-	LM2940IMP-5.0	LVR-IC	LDO, 5.0V±2%, 1A	SOT-223	21hn	VR1	4k	Nsc
L54B	-	LM2940IMP-8.0	LVR-IC	LDO, 8V±2%, 1A	SOT-223	21hn	VR1	4k	Nsc
L55B	-	LM2940IMP-10	LVR-IC	LDO, 10V±2%, 1A	SOT-223	21hn	VR1	4k	Nsc
L56B	-	LM2940IMP-12	LVR-IC	LDO, 12V±2%, 1A	SOT-223	21hn	VR1	4k	Nsc
L68B	-	LM2937IMP-2.5	LVR-IC	LDO, 2.5V±2%, 400mA	SOT-223	21hn	VR1	4k	Nsc
L69B	-	LM2937IMP-3.3	LVR-IC	LDO, 3.3V±2%, 400mA	SOT-223	21hn	VR1	4k	Nsc
L70B	-	LM2940IMP-15	LVR-IC	LDO, 15V±2%, 1A	SOT-223	21hn	VR1	4k	Nsc
L71B	-	LM2937IMP-5.0	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-223	21hn	VR1	4k	Nsc
L72B	-	LM2937IMP-8.0	LVR-IC	LDO, 8V±2%, 500mA	SOT-223	21hn	VR1	4k	Nsc
L73B	-	LM2937IMP-10	LVR-IC	LDO, 10V±2%, 500mA	SOT-223	21hn	VR1	4k	Nsc
L74B	-	LM2937IMP-12	LVR-IC	LDO, 12V±2%, 500mA	SOT-223	21hn	VR1	4k	Nsc
L75B	-	LM2937IMP-15	LVR-IC	LDO, 15V±2%, 500mA	SOT-223	21hn	VR1	4k	Nsc
LLNB	-	SM74501MP-5.0	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-223	21eu	VR1	4r	Nsc
LLSB	-	SM74501MP-3.3	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-223	21eu	VR1	4r	Nsc
LS00	-	LMS8117AMP-1.8	LVR-IC	LDO, 1.8V±1%, 1A	SOT-223	21wb	VR1	4k	Nsc
LS01	-	LMS8117AMP-3.3	LVR-IC	LDO, 3.3V±1%, 1A	SOT-223	21wb	VR1	4k	Nsc
LS0A	-	LMS8117AMP-ADJ	LVR-IC	LDO, Adjustable 1.25..13.8V, 1A	SOT-223	21wc	VR20	4k	Nsc
N00A	-	LM340MP-5.0	LVR-IC	LDO, 5.0V±2%, 1A	SOT-223	21hn	VR1	4r	Nsc
N01A	-	LM317EMP	LVR-IC	LDO, Adjustable 3..37V, 1.5A, 0..+125°C	SOT-223	21wc	VR20	4r	Nsc
N02A	-	LM337IMP	LVR-IC	LDO, Adjustable -1.2V..-37V, 1A	SOT-223	21cy	VR20	4r	Nsc
N03A	-	LM1117MP-ADJ	LVR-IC	LDO, Adjustable 1.25..13.8V, 800mA, 0..+125°	SOT-223	21wc	VR20	4k	Nsc
N03B	-	LM1117IMPX-ADJ	LVR-IC	LDO, Adjustable 1.25..13.8V, 800mA, -40..+125°	SOT-223	21wc	VR20	4k	Nsc
N04A	-	LM1117MP-2.85	LVR-IC	LDO, 2.85V, 800mA, 0..+125°	SOT-223	21wb	VR1	4k	Nsc
N05A	-	LM1117MP-3.3	LVR-IC	LDO, 3.3V, 800mA, 0..+125°	SOT-223	21wb	VR1	4k	Nsc
N05B	-	LM1117IMPX-3.3	LVR-IC	LDO, 3.3V, 800mA, -40..+125°	SOT-223	21wb	VR1	4k	Nsc
N06A	-	LM1117MP-5.0	LVR-IC	LDO, 5.0V, 800mA, 0..+125°	SOT-223	21wb	VR1	4k	Nsc
N06B	-	LM1117IMPX-5.0	LVR-IC	LDO, 5.0V, 800mA, -40..+125°	SOT-223	21wb	VR1	4k	Nsc
N07A	-	LM317AEMP	LVR-IC	LDO, Adjustable 3..37V, 1.5A, -40..+125°C	SOT-223	21wc	VR20	4r	Nsc
N1053	-	TFLN1053	Si-npn	AF, GP, 75V, 1.5A, 5W, B=300..1200, 140MHz	SOT-223	21tb	-	4q	Tfr
N12	-	DCP68	Si-npn	AF, 25V, 1A, 1W, B=85..375, 330MHz	SOT-223	21tm	-	4ma	Di
N12-25	-	DCP68-25	Si-npn	AF, 25V, 1A, 1W, B=160..375, 330MHz	SOT-223	21tm	-	4ma	Di
N12A	-	LM1117MPX-1.8	LVR-IC	LDO, 1.8V, 800mA, 0..+125°	SOT-223	21wb	VR1	4k	Nsc
N13A	-	LM1117MPX-2.5	LVR-IC	LDO, 2.5V, 0.8A, 0..+125°	SOT-223	21wb	VR1	4r	Nsc
N320	-	DNLS320E	Si-npn	AF, 20V, 3A, 1W, B>50, 150MHz	SOT-223	21tm	-	4ma	Di
N35	-	DNLS350E	Si-npn	AF, 60V, 3A, 1W, B>100, 100MHz	SOT-223	21tm	-	4ma	Di
N412	-	DNLS412E	Si-npn	AF, 12V, 4A, 1W, B>400, 150MHz	SOT-223	21tm	-	4ma	Di
N5E	-	LN6214P15F	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N5F	-	LN6214P16F	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N5H	-	LN6214P17F	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N5K	-	LN6214P18F	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N5L	-	LN6214P19F	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N5M	-	LN6214P20F	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N5N	-	LN6214P21F	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N5P	-	LN6214P22F	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N5R	-	LN6214P23F	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N5S	-	LN6214P24F	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N5T	-	LN6214P25F	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N5U	-	LN6214P26F	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N5V	-	LN6214P27F	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N5X	-	LN6214P28F	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N5Y	-	LN6214P29F	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N5Z	-	LN6214P30F	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N60	-	LN6214P31F	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N61	-	LN6214P32F	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N62	-	LN6214P33F	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N63	-	LN6214P34F	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N64	-	LN6214P35F	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N65	-	LN6214P36F	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N66	-	LN6214P37F	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N67	-	LN6214P38F	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N68	-	LN6214P39F	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N69	-	LN6214P40F	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6A	-	LN6214P41F	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6B	-	LN6214P42F	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6C	-	LN6214P43F	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6D	-	LN6214P44F	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6E	-	LN6214P45F	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6F	-	LN6214P46F	LVR-IC	LDO, 4.6V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6H	-	LN6214P47F	LVR-IC	LDO, 4.7V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6K	-	LN6214P48F	LVR-IC	LDO, 4.8V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6L	-	LN6214P49F	LVR-IC	LDO, 4.9V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6M	-	LN6214P50F	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6N	-	LN6214P51F	LVR-IC	LDO, 5.1V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6P	-	LN6214P52F	LVR-IC	LDO, 5.2V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6R	-	LN6214P53F	LVR-IC	LDO, 5.3V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6S	-	LN6214P54F	LVR-IC	LDO, 5.4V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6T	-	LN6214P55F	LVR-IC	LDO, 5.5V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6U	-	LN6214P56F	LVR-IC	LDO, 5.6V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6V	-	LN6214P57F	LVR-IC	LDO, 5.7V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6X	-	LN6214P58F	LVR-IC	LDO, 5.8V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6Y	-	LN6214P59F	LVR-IC	LDO, 5.9V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N6Z	-	LN6214P60F	LVR-IC	LDO, 6.0V±2%, 500mA	SOT-223	21vl	VR1	4za	Nln
N7C12Z	-	NX1117C12Z	LVR-IC	LDO, 1.2V±1%, 1A	SOT-223	21wb	VR1	4r	Nxp
N7C15Z	-	NX1117C15Z	LVR-IC	LDO, 1.5V±1%, 1A	SOT-223	21wb	VR1	4r	Nxp
N7C18Z	-	NX1117C18Z	LVR-IC	LDO, 1.8V±1%, 1A	SOT-223	21wb	VR1	4r	Nxp
N7C19Z	-	NX1117C19Z	LVR-IC	LDO, 1.9V±1%, 1A	SOT-223	21wb	VR1	4r	Nxp
N7C20Z	-	NX1117C20Z	LVR-IC	LDO, 2.0V±1%, 1A	SOT-223	21wb	VR1	4r	Nxp
N7C25Z	-	NX1117C25Z	LVR-IC	LDO, 2.5V±1%, 1A	SOT-223	21wb	VR1	4r	Nxp
N7C30Z	-	NX1117C33Z	LVR-IC	LDO, 3.0V±1%, 1A	SOT-223	21wb	VR1	4r	Nxp
N7C50Z	-	NX1117C50Z	LVR-IC	LDO, 5.0V±1%, 1A	SOT-223	21wb	VR1	4r	Nxp
NC285Z	-	NX1117C285Z	LVR-IC	LDO, 2.85V±1%, 1A	SOT-223	21wb	VR1	4r	Nxp
NCADJZ	-	NX1117CADJZ	LVR-IC	LDO, Adjustable 12..5.0V±1%, 1A	SOT-223	21wc	VR20	4r	Nxp
P12	-	DCP69	Si-pnp	AF, 25V, 1A, 1W, B=85..375, 200MHz	SOT-223	21tm	-	4ma	Di
P12-16	-	DCP69-16	Si-pnp	AF, 25V, 1A, 1W, B=100..250, 200MHz	SOT-223	21tm	-	4ma	Di
P12-25	-	DCP69-25	Si-pnp	AF, 25V, 1A, 1W, B=160..375, 200MHz	SOT-223	21tm	-	4ma	Di
P1A	-	PZT3904	Si-npn	Sw, 60V, 100mA, 1.2W, B=100..300, >300MHz	SOT-223	21tm	-	4s	Mot
P1D	-	PZTA42	Si-npn	Vid, 300/300V, 200mA, 1.5W, B>25, >50MHz	SOT-223	21tm	-	4s	Ons
P1E	-	PZTA43	Si-npn	Vid, 200/200V, 200mA, 1.5W, B>25, >50MHz	SOT-223	21tm	-	4s	Ons
P1F	-	PZT2222A	Si-npn	Sw, 75V, 600mA, 1.5W, B=100..300, >300MHz	SOT-223	21tm	-	4s	Ons
P1M	-	PZTA13	Si-npn-Darl	GP, 30V, 300mA, 1.5W, B>5000, >125MHz	SOT-223	21tm	-	4s	Ons
P1N	-	PZTA14	Si-npn-Darl	GP, 30V, 300mA, 1.5W, B>10000, >125MHz	SOT-223	21tm	-	4s	Ons
P2A	-	PZT3906	Si-pnp	Sw, 60V, 100mA, 1.2W, B=100..300, >250MHz	SOT-223	21tm	-	4s	Mot
P2D	-	PZTA92	Si-pnp	Vid, 300/300V, 500mA, 1.5W, B=25, >50MHz	SOT-223	21tm	-	4s	Ons
P2E	-	PZTA93	Si-pnp	Vid, 200/200V, 500mA, 1.5W, B=25, >50MHz	SOT-223	21tm	-	4s	Mot
P2F	-	PZT2907A	Si-pnp	Sw, 60V, 600mA, 1.5W, B=100..300, >200MHz	SOT-223	21tm	-	4s	Ons
P2U	-	PZTA63	Si-pnp-Darl	GP, 30V, 500mA, 1.5W, B>5000, >125MHz	SOT-223	21tm	-	4s	Ons
P2V	-	PZTA64	Si-pnp-Darl	GP, 30V, 500mA, 1.5W, B>10000, >125MHz	SOT-223	21tm	-	4s	Ons
P315	-	DPLS315E	Si-pnp	AF, 15V, 3A, 1W, B>300, 100MHz	SOT-223	21tm	-	4ma	Di
P325	-	DPLS325E	Si-pnp	AF, 25V, 3A, 1W, B=300..800, 100MHz	SOT-223	21tm	-	4ma	Di
P35	-	DPLS350E	Si-pnp	AF, 60V, 3A, 1W, B>200, 100MHz	SOT-223	21tm	-	4ma	Di
P414A	-	DPLS4140E	Si-pnp	AF, 180V, 4A, 1W, B=100..300, 150MHz	SOT-223	21tm	-	4ma	Di
S12	-	STPS120E	Si-diode	SBR, 20V, 1A, Vf<0.55V(1A)	SOT-223	21rt	-	4k	Ste
S13	-	STPS130E	Si-diode	SBR, 30V, 1A, Vf<0.55V(1A)	SOT-223	21rt	-	4k	Ste
S14	-	STPS140E	Si-diode	SBR, 40V, 1A, Vf<0.55V(1A)	SOT-223	21rt	-	4k	Ste
S16	-	STPS160E	Si-diode	SBR, 60V, 1A, Vf<0.55V(1A)	SOT-223	21rt	-	4k	Ste
SP19A	-	BSP19AT1	Si-npn	AF, Sw, Vid, 400V, 1A, 800mW, B>40, >70MHz	SOT-223	21tm	-	4s	Ons
SP20A	-	BSP20AT1	Si-npn	AF, Sw, Vid, 300V, 1A, 800mW, B>40, >70MHz	SOT-223	21tm	-	4s	Ons
T22	-	STPS220CE	Si-diode	Dual, Schottky barrier rectifier, 20V, 1A, Vf<0.55V(1A)	SOT-223	21bs	-	4k	Ste
T23	-	STPS230CE	Si-diode	Dual, Schottky barrier rectifier, 30V, 1A, Vf<0.55V(1A)	SOT-223	21bs	-	4k	Ste
T24	-	STPS240CE	Si-diode	Dual, Schottky barrier rectifier, 40V, 1A, Vf<0.55V(1A)	SOT-223	21bs	-	4k	Ste
T26	-	STPS260CE	Si-diode	Dual, Schottky barrier rectifier, 60V, 1A, Vf<0.55V(1A)	SOT-223	21bs	-	4k	Ste
T350	-	MMJT350T1	Si-pnp	Sw, Vid, 300V, 500mA, 2.75W, B=30..240	SOT-223	21tm	-	4s	Ons
TBD	-	NTF5P03T3	p-MOSFET	V-MOS, LogL, 30V, 5.2A, 1.5W, 56mΩ(5.2A), 10/38ns	SOT-223	21f2	-	4t	Ons
TM1101	-	PZTM1101	Si-npn	Sw, 60V, 200mA, 500mW, >250MHz, int, SBD, 40V, 1A	SOT-223	21to	-	4k	Phi
TM1102	-	PZTM1102	Si-pnp	Sw, 40V, 200mA, 500mW, >250MHz, int, SBD, 40V, 1A	SOT-223	21tn	-	4k	Phi
V6643	-	NCV8664ST33T3G	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-223	21hn	VR1	4s	Ons



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V6645	-	NCV8664ST50T3G	LVR-IC	LDO, 5.0V±2%, 150mA	SOT-223	21hn	VR1	4s	Ons
Z06	-	Z0110MN	Triac	600V, 1A, 1W, Vtm<1.56V, <Igt>25mA	SOT-223	21hz	-	4r	Ste
Z07	-	Z0110SN	Triac	700V, 1A, 1W, Vtm<1.56V, <Igt>25mA	SOT-223	21hz	-	4r	Ste
Z08	-	Z0110NN	Triac	800V, 1A, 1W, Vtm<1.56V, <Igt>25mA	SOT-223	21hz	-	4r	Ste
Z0D	-	Z0110DN	Triac	400V, 1A, 1W, Vtm<1.56V, <Igt>25mA	SOT-223	21hz	-	4r	Ste
Z0M	-	Z0110MN	Triac	600V, 1A, 1W, Vtm<1.56V, <Igt>25mA	SOT-223	21hz	-	4r	Ste
Z0N	-	Z0110NN	Triac	800V, 1A, 1W, Vtm<1.56V, <Igt>25mA	SOT-223	21hz	-	4r	Ste
Z0S	-	Z0110SN	Triac	700V, 1A, 1W, Vtm<1.56V, <Igt>25mA	SOT-223	21hz	-	4r	Ste
Z1	-	CHS04ZPT	Si-diode	SBD, 40V, 2A, Vf<0.6V(2A)	SOT-223	21dm	-	4r	Chm
Z36	-	Z0103MN	Triac	600V, 1A, 1W, Vtm<1.56V, <Igt>3mA	SOT-223	21hz	-	4r	Ste
Z37	-	Z0103SN	Triac	700V, 1A, 1W, Vtm<1.56V, <Igt>3mA	SOT-223	21hz	-	4r	Ste
Z38	-	Z0103NN	Triac	800V, 1A, 1W, Vtm<1.56V, <Igt>3mA	SOT-223	21hz	-	4r	Ste
Z3D	-	Z0103DN	Triac	400V, 1A, 1W, Vtm<1.56V, <Igt>3mA	SOT-223	21hz	-	4r	Ste
Z3M	-	Z0103MN	Triac	600V, 1A, 1W, Vtm<1.56V, <Igt>3mA	SOT-223	21hz	-	4r	Ste
Z3N	-	Z0103NN	Triac	800V, 1A, 1W, Vtm<1.56V, <Igt>3mA	SOT-223	21hz	-	4r	Ste
Z3S	-	Z0103SN	Triac	700V, 1A, 1W, Vtm<1.56V, <Igt>3mA	SOT-223	21hz	-	4r	Ste
Z76	-	Z0107MN	Triac	600V, 1A, 1W, Vtm<1.56V, <Igt>5mA	SOT-223	21hz	-	4r	Ste
Z77	-	Z0107SN	Triac	700V, 1A, 1W, Vtm<1.56V, <Igt>5mA	SOT-223	21hz	-	4r	Ste
Z78	-	Z0107NN	Triac	800V, 1A, 1W, Vtm<1.56V, <Igt>5mA	SOT-223	21hz	-	4r	Ste
Z7D	-	Z0107DN	Triac	400V, 1A, 1W, Vtm<1.56V, <Igt>5mA	SOT-223	21hz	-	4r	Ste
Z7M	-	Z0107MN	Triac	600V, 1A, 1W, Vtm<1.56V, <Igt>5mA	SOT-223	21hz	-	4r	Ste
Z7N	-	Z0107NN	Triac	800V, 1A, 1W, Vtm<1.56V, <Igt>5mA	SOT-223	21hz	-	4r	Ste
Z7S	-	Z0107SN	Triac	700V, 1A, 1W, Vtm<1.56V, <Igt>5mA	SOT-223	21hz	-	4r	Ste
Z96	-	Z0109MN	Triac	600V, 1A, 1W, Vtm<1.56V, <Igt>10mA	SOT-223	21hz	-	4r	Ste
Z97	-	Z0109SN	Triac	700V, 1A, 1W, Vtm<1.56V, <Igt>10mA	SOT-223	21hz	-	4r	Ste
Z98	-	Z0109NN	Triac	800V, 1A, 1W, Vtm<1.56V, <Igt>10mA	SOT-223	21hz	-	4r	Ste
Z9D	-	Z0109DN	Triac	400V, 1A, 1W, Vtm<1.56V, <Igt>10mA	SOT-223	21hz	-	4r	Ste
Z9M	-	Z0109MN	Triac	600V, 1A, 1W, Vtm<1.56V, <Igt>10mA	SOT-223	21hz	-	4r	Ste
Z9N	-	Z0110NN	Triac	800V, 1A, 1W, Vtm<1.56V, <Igt>10mA	SOT-223	21hz	-	4r	Ste
Z9S	-	Z0109SN	Triac	700V, 1A, 1W, Vtm<1.56V, <Igt>10mA	SOT-223	21hz	-	4r	Ste
ZAN	-	CHT31CZPT	Si-npn	AF, Sw, 100V, 3A B=10..100, 3MHz	SOT-223	21tb	-	4r	Chm
ZAP	-	CHT32CZPT	Si-pnp	AF, Sw, 100V, 3A, B=10..100, 3MHz	SOT-223	21tb	-	4r	Chm
ZBN	-	CHT122ZPT	Si-npn-Darl	AF, Drv, 100V, 5A B>1000, 4MHz	SOT-223	21tb	-	4r	Chm
ZBP	-	CHT127ZPT	Si-pnp-Darl	AF, Sw, 100V, 5A, B>1000, 4MHz	SOT-223	21tb	-	4r	Chm
ZCN	-	CHT2222ZPT	Si-npn	AF, Sw, 40V, 600mA B=100..300, 300MHz	SOT-223	21tb	-	4r	Chm
ZCP	-	CHT2907ZPT	Si-pnp	AF, Sw, 60V, 600mA, B=100..300, 200MHz	SOT-223	21tb	-	4r	Chm
ZDN	-	CHT3055ZPT	Si-npn	AF, Sw, 60V, 6A B=20..70, 2.5MHz	SOT-223	21tb	-	4r	Chm
ZDP	-	CHT2955ZPT	Si-pnp	AF, Sw, 60V, 6A, B=20..70, 2.5MHz	SOT-223	21tb	-	4r	Chm
ZEP	-	CHT4033ZPT	Si-pnp	AF, Sw, 80V, 1A, B=100..300, 100MHz	SOT-223	21tb	-	4r	Chm
ZFN	-	CHT5551ZPT	Si-npn	AF, Drv, 160V, 600mA B=80..250, 300MHz	SOT-223	21tb	-	4r	Chm
ZFP	-	CHT5401ZPT	Si-pnp	Af, Drv, 150V, 600mA, B=60..240, 100MHz	SOT-223	21tb	-	4r	Chm
ZGN	-	CHTA14ZPT	Si-npn-Darl	AF, Sw, 30V, 1A B>20000, 125MHz	SOT-223	21tb	-	4r	Chm
ZGP	-	CHTA64ZPT	Si-pnp-Darl	AF, Sw, 30V, 1A, B>20000, 125MHz	SOT-223	21tb	-	4r	Chm
ZHN	-	CHTA42ZPT	Si-npn	Vid, Drv, 300V, 300mA B>40, 50MHz	SOT-223	21tb	-	4r	Chm
ZHP	-	CHTA92ZPT	Si-pnp	Vid, Drv, 300V, 500mA, B>40, 50MHz	SOT-223	21tb	-	4r	Chm
ZIN	-	CH3904ZPT	Si-npn	AF, Sw, 40V, 200mA B=100..300, 300MHz	SOT-223	21tb	-	4r	Chm
ZIP	-	CH3906ZPT	Si-pnp	AF, Sw, 40V, 200mA, B=100..300, 250MHz	SOT-223	21tb	-	4r	Chm
ZJN	-	CHTA44ZPT	Si-npn	Vid, Drv, 400V, 300mA B=50..200, 50MHz	SOT-223	21tb	-	4r	Chm
ZKN	-	CHTA27ZPT	Si-npn-Darl	AF, Sw, 60V, 500mA B>10000, 125MHz	SOT-223	21tb	-	4r	Chm
ZLN	-	CHT5338ZPT	Si-npn	AF, Drv, 100V, 5A B=30..120, 30MHz	SOT-223	21tb	-	4r	Chm
ZMN	-	CHT2000ZPT	Si-npn-Darl	Vid, Drv, 200V, 600mA B>3000	SOT-223	21tb	-	4r	Chm
ZNS34	-	DJT4031N	Si-npn	AF, 40V, 3A, 1.2W, B=200..500, 105MHz	SOT-223	21tm	-	4ma	Di
ZNS66	-	DSS60601MZ4	Si-npn	AF, 100V, 6A, 1.2W, B=120..360, 100MHz	SOT-223	21tm	-	4ma	Di
ZPS33	-	DMJT9435	Si-pnp	AF, 45V, 3A, 1.2W, B>90, 160MHz	SOT-223	21tm	-	4ma	Di
ZPS34	-	DJT4030P	Si-pnp	AF, 40V, 3A, 1.2W, B=200..400, 150MHz	SOT-223	21tm	-	4ma	Di
ZPS66	-	DSS60600MZ4	Si-pnp	AF, 100V, 6A, 1.2W, B=120..360, 100MHz	SOT-223	21tm	-	4ma	Di
ZT2222	-	PZT2222	Si-npn	Sw, 60V, 600mA, 1.5W, B=100..300, >300MHz	SOT-223	21tm	-	4k	Sie
ZT2222A	-	PZT2222A	Si-npn	Sw, 75V, 600mA, 1.5W, B=100..300, >300MHz	SOT-223	21tm	-	4k	Sie
ZT2907	-	PZT2907	Si-pnp	Sw, 60V, 600mA, 1.5W, B=100..300, >200MHz	SOT-223	21tm	-	4k	Sie
ZT2907A	-	PZT2907A	Si-pnp	Sw, 60V, 600mA, 1.5W, B=100..300, >200MHz	SOT-223	21tm	-	4k	Sie
ZT3904	-	PZT3904	Si-npn	Sw, 60V, 100mA, 1.2W, B=100..300, >300MHz	SOT-223	21tm	-	4k	Sie
ZT3906	-	PZT3906	Si-pnp	Sw, 60V, 200mA, 1.5W, B=100..300, >250MHz	SOT-223	21tm	-	4k	Sie
ZT4401	-	PZT4401	Si-npn	AF, Sw, 60V, 600mA, 1.5W, B=100..300, >250MHz	SOT-223	21tm	-	4k	Phi
ZT4403	-	PZT4403	Si-pnp	Sw, 40V, 600mA, 1.15W, B=30..30, >200MHz	SOT-223	21tm	-	4k	Phi
ZT651	-	PZT651	Si-npn	GP, 80V, 2A, 800mW, B>75, >75MHz	SOT-223	21tm	-	4s	Mot
ZT751	-	PZT751	Si-pnp	GP, 80V, 2A, 800mW, B>75, >75MHz	SOT-223	21tm	-	4s	Ons
ZTA96	-	PZTA96S	Si-pnp	Vid, 450/450V, 500mA, 1.5W, B>25, >50MHz	SOT-223	21tm	-	4s	Ons

SECTION 5
SOT-89 case SMD semiconductor components



0
1
2
3
4
5
6
7
8
9
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
000	-	ELM85101A	LVR-IC	LDO, 1.0V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
008	-	ELM85081A	LVR-IC	LDO, 0.8V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
009	-	ELM85091A	LVR-IC	LDO, 0.9±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00A	-	ELM85111A	LVR-IC	LDO, 1.1V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00B	-	ELM85121A	LVR-IC	LDO, 1.2V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00C	-	ELM85131A	LVR-IC	LDO, 1.3V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00D	-	ELM85141A	LVR-IC	LDO, 1.4V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00E	-	ELM85151A	LVR-IC	LDO, 1.5V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00F	-	ELM85161A	LVR-IC	LDO, 1.6V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00G	-	ELM85171A	LVR-IC	LDO, 1.7V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00H	-	ELM85181A	LVR-IC	LDO, 1.8V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00J	-	ELM85191A	LVR-IC	LDO, 1.9V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00K	-	ELM85201A	LVR-IC	LDO, 2.0V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00L	-	ELM85211A	LVR-IC	LDO, 2.1V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00M	-	ELM85221A	LVR-IC	LDO, 2.2V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00N	-	ELM85231A	LVR-IC	LDO, 2.3V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00P	-	ELM85241A	LVR-IC	LDO, 2.4V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00Q	-	ELM85251A	LVR-IC	LDO, 2.5V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00R	-	ELM85261A	LVR-IC	LDO, 2.6V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00S	-	ELM85271A	LVR-IC	LDO, 2.7V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00T	-	ELM85281A	LVR-IC	LDO, 2.8V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00U	-	ELM85291A	LVR-IC	LDO, 2.9V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
00V	-	ELM85301A	LVR-IC	LDO, 3.0V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
01	-	Gali-1	MMIC	RF amplifier, DC..8GHz, 11dB (50Ω)	SOT-89	20aa	A1	4b	Mc
010	-	ELM85401A	LVR-IC	LDO, 4.0V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
011	-	ELM85311A	LVR-IC	LDO, 3.1V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
012	-	ELM85321A	LVR-IC	LDO, 3.2V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
013	-	ELM85331A	LVR-IC	LDO, 3.3V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
014	-	ELM85341A	LVR-IC	LDO, 3.4V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
015	-	ELM85351A	LVR-IC	LDO, 3.5V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
016	-	ELM85361A	LVR-IC	LDO, 3.6V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
017	-	ELM85371A	LVR-IC	LDO, 3.7V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
018	-	ELM85381A	LVR-IC	LDO, 3.8V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
019	-	ELM85391A	LVR-IC	LDO, 3.9V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
01A	-	ELM85411A	LVR-IC	LDO, 4.1V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
01B	-	ELM85421A	LVR-IC	LDO, 4.2V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
01C	-	ELM85431A	LVR-IC	LDO, 4.3V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
01D	-	ELM85441A	LVR-IC	LDO, 4.4V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
01E	-	ELM85451A	LVR-IC	LDO, 4.5V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
01F	-	ELM85461A	LVR-IC	LDO, 4.6V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
01G	-	ELM85471A	LVR-IC	LDO, 4.7V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
01H	-	ELM85481A	LVR-IC	LDO, 4.8V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
01J	-	ELM85491A	LVR-IC	LDO, 4.9V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
01K	-	ELM85501A	LVR-IC	LDO, 5.0V±2%, 800mA	SOT-89	20vl	VR1	4c	Elm
02	-	Gali-2	MMIC	RF amplifier, DC..8GHz, 15.1dB (50Ω)	SOT-89	20aa	A1	4b	Mc
03	-	Gali-3	MMIC	RF amplifier, DC..3GHz, 15.8dB (50Ω)	SOT-89	20aa	A1	4b	Mc
04	-	Gali-4	MMIC	RF amplifier, DC..4GHz, 13.1dB (50Ω)	SOT-89	20aa	A1	4b	Mc
047	-	FCX1047A	Si-npn	Hi-beta, Lo-sat, 35V, 4A, 2W, B=450..1200, 150MHz	SOT-89	20tb	-	4b	Zx
04F	-	Gali-4F	MMIC	RF amplifier, DC..4GHz, 13.2dB (50Ω)	SOT-89	20aa	A1	4b	Mc
05	-	Gali-5	MMIC	RF amplifier, DC..4GHz, 15.1dB (50Ω)	SOT-89	20aa	A1	4b	Mc
051	-	FCX1051A	Si-npn	Hi-beta, Lo-sat, 150V, 3A, 2W, B=450..1200, 155MHz	SOT-89	20tb	-	4b	Zx
053	-	FCX1053A	Si-npn	Hi-beta, Lo-sat, 150V, 3A, 1W, B=100..1200, 140MHz	SOT-89	20tb	-	4b	Zx
05F	-	Gali-5F	MMIC	RF amplifier, DC..4GHz, 15.1dB (50Ω)	SOT-89	20aa	A1	4b	Mc
06	-	Gali-6	MMIC	RF amplifier, DC..4GHz, 12.3dB (50Ω)	SOT-89	20aa	A1	4b	Mc
06F	-	Gali-6F	MMIC	RF amplifier, DC..4GHz, 12.3dB (50Ω)	SOT-89	20aa	A1	4b	Mc
09	-	ELM9709NAB	Vdet-IC	0.9V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
095	-	AP6209-12GL	LVR-IC	LDO, 1.2V±2%, 250mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
095	-	AP6209-12PL	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-89	20vl	VR1	4pa	Anw
098	-	AP6209-15GL	LVR-IC	LDO, 1.5V±2%, 250mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
098	-	AP6209-15PL	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-89	20vl	VR1	4pa	Anw
09A	-	AP6209-18GL	LVR-IC	LDO, 1.8V±2%, 250mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
09A	-	AP6209-18PL	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-89	20vl	VR1	4pa	Anw
09B	-	AP6209-BBGL	LVR-IC	LDO, 1.85V±2%, 250mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
09B	-	AP6209-BBPL	LVR-IC	LDO, 1.85V±2%, 250mA	SOT-89	20vl	VR1	4pa	Anw
09D	-	AP6209-20GL	LVR-IC	LDO, 2.0V±2%, 250mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
09D	-	AP6209-20PL	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-89	20vl	VR1	4pa	Anw
09E	-	AP6209-22GL	LVR-IC	LDO, 2.2V±2%, 250mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
09E	-	AP6209-22PL	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-89	20vl	VR1	4pa	Anw
09G	-	AP6209-25GL	LVR-IC	LDO, 2.5V±2%, 250mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
09G	-	AP6209-25PL	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-89	20vl	VR1	4pa	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
09J	-	AP6209-27GL	LVR-IC	LDO, 2.7V±2%, 250mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
09J	-	AP6209-27PL	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-89	20vl	VR1	4pa	Anw
09K	-	AP6209-28GL	LVR-IC	LDO, 2.8V±2%, 250mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
09K	-	AP6209-28PL	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-89	20vl	VR1	4pa	Anw
09M	-	AP6209-30GL	LVR-IC	LDO, 3.0V±2%, 250mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
09M	-	AP6209-30PL	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-89	20vl	VR1	4pa	Anw
09Q	-	AP6209-33GL	LVR-IC	LDO, 3.3V±2%, 250mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
09Q	-	AP6209-33PL	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-89	20vl	VR1	4pa	Anw
09S	-	AP6209-42GL	LVR-IC	LDO, 4.2V±2%, 250mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
09S	-	AP6209-42PL	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-89	20vl	VR1	4pa	Anw
09T	-	AP6209-35GL	LVR-IC	LDO, 3.5V±2%, 250mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
09T	-	AP6209-35PL	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-89	20vl	VR1	4pa	Anw
09V	-	AP6209-36GL	LVR-IC	LDO, 3.6V±2%, 250mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
09V	-	AP6209-36PL	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-89	20vl	VR1	4pa	Anw
09Z	-	AP6209-50GL	LVR-IC	LDO, 5.0V±2%, 250mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
09Z	-	AP6209-50PL	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-89	20vl	VR1	4pa	Anw
0B	-	RH5RL20AA	LVR-IC	2.0V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
0C	-	MC78LC30HT1	LVR-IC	Low Iq, 3V±2.5%, 80mA	SOT-89	20vl	VR1	4b	Ons
0C	-	RH5RL30AA	LVR-IC	3.0V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
0D	-	RH5RL40AA	LVR-IC	4.0V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
0E	-	RH5RL50AA	LVR-IC	5.0V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
0F	-	RH5RL60AA	LVR-IC	6V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
0J	-	RH5RE20AA	LVR-IC	Ultra-LDO, 2.0V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
0K	-	RH5RE30AA	LVR-IC	Ultra-LDO, 3.0V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
0L	-	RH5RE40AA	LVR-IC	Ultra-LDO, 4.0V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
0M	-	RH5RE50AA	LVR-IC	Ultra-LDO, 5.0V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
0N	-	RH5RE60AA	LVR-IC	Ultra-LDO, 6.0V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
10	-	ELM9710NAB	Vdet-IC	1.0V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
100	-	XC6503P121PR-G	LVR-IC	LDO, 1.2V±20mV, 500mA	SOT-89	20ch	VR1	4a	Tor
101	-	XC6503P131PR-G	LVR-IC	LDO, 1.3V±20mV, 500mA	SOT-89	20ch	VR1	4a	Tor
1019	-	EC1019B	MMIC	Buff/amp, DC..4GHz, 18.5dB (2GHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
1019G	-	EC1019B-G	MMIC	Buff/amp, DC..4GHz, 18.5dB (2GHz, 50Ω), Green package	SOT-89	20aa	A1	4i	Wjc
102	-	XC6503P141PR-G	LVR-IC	LDO, 1.4V±20mV, 500mA	SOT-89	20ch	VR1	4a	Tor
103	-	XC6503P151PR-G	LVR-IC	LDO, 1.5V±20mV, 500mA	SOT-89	20ch	VR1	4a	Tor
104	-	XC6503P161PR-G	LVR-IC	LDO, 1.6V±20mV, 500mA	SOT-89	20ch	VR1	4a	Tor
105	-	XC6503P171PR-G	LVR-IC	LDO, 1.7V±20mV, 500mA	SOT-89	20ch	VR1	4a	Tor
106	-	XC6503P181PR-G	LVR-IC	LDO, 1.8V±20mV, 500mA	SOT-89	20ch	VR1	4a	Tor
107	-	XC6503P191PR-G	LVR-IC	LDO, 1.9V±20mV, 500mA	SOT-89	20ch	VR1	4a	Tor
1078G	-	EC1078B-G	MMIC	Buff/amp, DC..3.5GHz, 20dB (1GHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
108	-	XC6503P201PR-G	LVR-IC	LDO, 2.0V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
109	-	XC6503P211PR-G	LVR-IC	LDO, 2.1V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10A	-	XC6503P221PR-G	LVR-IC	LDO, 2.2V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10B	-	XC6503P231PR-G	LVR-IC	LDO, 2.3V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10C	-	XC6503P241PR-G	LVR-IC	LDO, 2.4V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10D	-	XC6503P251PR-G	LVR-IC	LDO, 2.5V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10E	-	XC6503P261PR-G	LVR-IC	LDO, 2.6V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10F	-	XC6503P271PR-G	LVR-IC	LDO, 2.7V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10H	-	XC6503P281PR-G	LVR-IC	LDO, 2.8V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10K	-	XC6503P291PR-G	LVR-IC	LDO, 2.9V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10L	-	XC6503P301PR-G	LVR-IC	LDO, 3.0V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10M	-	XC6503P311PR-G	LVR-IC	LDO, 3.1V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10N	-	XC6503P321PR-G	LVR-IC	LDO, 3.2V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10P	-	XC6503P331PR-G	LVR-IC	LDO, 3.3V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10R	-	XC6503P341PR-G	LVR-IC	LDO, 3.4V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10S	-	XC6503P351PR-G	LVR-IC	LDO, 3.5V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10T	-	XC6503P361PR-G	LVR-IC	LDO, 3.6V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10U	-	XC6503P371PR-G	LVR-IC	LDO, 3.7V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10V	-	XC6503P381PR-G	LVR-IC	LDO, 3.8V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10X	-	XC6503P391PR-G	LVR-IC	LDO, 3.9V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10Y	-	BZV49-C10	Z-diode	10V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
10Y	-	XC6503P401PR-G	LVR-IC	LDO, 4.0V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
10Z	-	XC6503P411PR-G	LVR-IC	LDO, 4.1V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
11	-	ELM9711NAB	Vdet-IC	1.1V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
110	-	XC6503P421PR-G	LVR-IC	LDO, 4.2V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
111	-	XC6503P431PR-G	LVR-IC	LDO, 4.3V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
1117C1.2	-	LM1117F-1.2V	LVR-IC	LDO, 1.2V±1%, 1A	SOT-89	20cg	VR1	4g	Htc
1117C1.5	-	LM1117F-1.5V	LVR-IC	LDO, 1.5V±1%, 1A	SOT-89	20cg	VR1	4g	Htc
1117C1.8	-	LM1117F-1.8V	LVR-IC	LDO, 1.8V±1%, 1A	SOT-89	20cg	VR1	4g	Htc
1117C2.5	-	LM1117F-2.5V	LVR-IC	LDO, 2.5V±1%, 1A	SOT-89	20cg	VR1	4g	Htc
1117C2.85	-	LM1117F-2.85V	LVR-IC	LDO, 2.85V±1%, 1A	SOT-89	20cg	VR1	4g	Htc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1117C3.3	-	LM1117F-3.3V	LVR-IC	LDO, 3.3V±1%, 1A	SOT-89	20cg	VR1	4g	Htc
1117C5.0	-	LM1117F-5.0V	LVR-IC	LDO, 5.0V±1%, 1A	SOT-89	20cg	VR1	4g	Htc
1117CADJ	-	LM1117F-ADJ	LVR-IC	LDO, Adjustable 1.25..13.8V, 1A	SOT-89	20cn	VR20	4g	Htc
1117GC1.2	-	LM1117GF-1.2V	LVR-IC	LDO, 1.2V±1%, 1A	SOT-89	20cg	VR1	4g	Htc
1117GC1.5	-	LM1117GF-1.5V	LVR-IC	LDO, 1.5V±1%, 1A	SOT-89	20cg	VR1	4g	Htc
1117GC1.8	-	LM1117GF-1.8V	LVR-IC	LDO, 1.8V±1%, 1A	SOT-89	20cg	VR1	4g	Htc
1117GC2.5	-	LM1117GF-2.5V	LVR-IC	LDO, 2.5V±1%, 1A	SOT-89	20cg	VR1	4g	Htc
1117GC2.85	-	LM1117GF-2.85V	LVR-IC	LDO, 2.85V±1%, 1A	SOT-89	20cg	VR1	4g	Htc
1117GC3.3	-	LM1117GF-3.3V	LVR-IC	LDO, 3.3V±1%, 1A	SOT-89	20cg	VR1	4g	Htc
1117GC5.0	-	LM1117GF-5.0V	LVR-IC	LDO, 5.0V±1%, 1A	SOT-89	20cg	VR1	4g	Htc
1117GCADJ	-	LM1117GF-ADJ	LVR-IC	LDO, Adjustable 1.25..13.8V, 1A	SOT-89	20cn	VR20	4g	Htc
112	-	XC6503P441PR-G	LVR-IC	LDO, 4.4V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
1121R	-	KSB1121-R	Si-pnp	Lo-sat, 30V, 2A, 500mW, B=100..200, >150MHz	SOT-89	20tb	-	4n	F
1121S	-	KSB1121-S	Si-pnp	Lo-sat, 30V, 2A, 500mW, B=140..280, >150MHz	SOT-89	20tb	-	4n	F
1121T	-	KSB1121-T	Si-pnp	Lo-sat, 30V, 2A, 500mW, B=200..400, >150MHz	SOT-89	20tb	-	4n	F
1121U	-	KSB1121-U	Si-pnp	Lo-sat, 30V, 2A, 500mW, B=280..560, >150MHz	SOT-89	20tb	-	4n	F
113	-	XC6503P451PR-G	LVR-IC	LDO, 4.5V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
114	-	XC6503P461PR-G	LVR-IC	LDO, 4.6V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
115	-	XC6503P471PR-G	LVR-IC	LDO, 4.7V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
116	-	XC6503P481PR-G	LVR-IC	LDO, 4.8V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
117	-	XC6503P491PR-G	LVR-IC	LDO, 4.9V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
118	-	XC6503P501PR-G	LVR-IC	LDO, 5.0V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
11Y	-	BZV49-C11	Z-diode	11V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
12	-	ELM9712NAB	Vdet-IC	1.2V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
120	-	XC6503P12APR-G	LVR-IC	LDO, 1.25V±20mV, 500mA	SOT-89	20ch	VR1	4a	Tor
120	jb	XC6372A201P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1201O	-	KSA1201-O	Si-pnp	AF, Sw, 120V, 800mA, 500mW, B=80..160, 120MHz	SOT-89	20tb	-	4n	F
1201Y	-	KSA1201-Y	Si-pnp	AF, Sw, 120V, 800mA, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4n	F
1203O	-	KSA1203-O	Si-pnp	AF, 30V, 1.5A, 500mW, B=100..200, 20MHz	SOT-89	20tb	-	4n	F
1203Y	-	KSA1203-Y	Si-pnp	AF, 30V, 1.5A, 500mW, B=160..320, 20MHz	SOT-89	20tb	-	4n	F
121	-	XC6503P13APR-G	LVR-IC	LDO, 1.35V±20mV, 500mA	SOT-89	20ch	VR1	4a	Tor
121	jb	XC6372A202P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
122	-	XC6503P14APR-G	LVR-IC	LDO, 1.45V±20mV, 500mA	SOT-89	20ch	VR1	4a	Tor
122	jb	XC6372A221P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
123	-	XC6503P15APR-G	LVR-IC	LDO, 1.55V±20mV, 500mA	SOT-89	20ch	VR1	4a	Tor
123	jb	XC6372A231P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
124	-	XC6503P16APR-G	LVR-IC	LDO, 1.65V±20mV, 500mA	SOT-89	20ch	VR1	4a	Tor
124	jb	XC6372A241P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
125	-	XC6503P17APR-G	LVR-IC	LDO, 1.75V±20mV, 500mA	SOT-89	20ch	VR1	4a	Tor
125	jb	XC6372A251P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
126	-	XC6503P18APR-G	LVR-IC	LDO, 1.85V±20mV, 500mA	SOT-89	20ch	VR1	4a	Tor
126	jb	XC6372A261P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
127	-	XC6503P19APR-G	LVR-IC	LDO, 1.95V±20mV, 500mA	SOT-89	20ch	VR1	4a	Tor
127	jb	XC6372A271P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
128	-	XC6503P20APR-G	LVR-IC	LDO, 2.05V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
128	jb	XC6372A281P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
129	-	XC6503P21APR-G	LVR-IC	LDO, 2.15V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
129	jb	XC6372A291P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
12A	-	XC6503P22APR-G	LVR-IC	LDO, 2.25V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12A	jb	XC6372A211P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
12B	-	XC6503P23APR-G	LVR-IC	LDO, 2.35V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12B	jb	XC6372A212P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
12C	-	XC6503P24APR-G	LVR-IC	LDO, 2.45V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12C	jb	XC6372A222P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
12D	-	XC6503P25APR-G	LVR-IC	LDO, 2.55V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12D	jb	XC6372A232P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
12E	-	XC6503P26APR-G	LVR-IC	LDO, 2.65V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12E	jb	XC6372A242P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
12F	-	XC6503P27APR-G	LVR-IC	LDO, 2.75V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12F	jb	XC6372A252P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
12H	-	XC6503P28APR-G	LVR-IC	LDO, 2.85V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12H	jb	XC6372A262P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
12K	-	XC6503P29APR-G	LVR-IC	LDO, 2.95V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12K	jb	XC6372A272P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
12L	-	XC6503P30APR-G	LVR-IC	LDO, 3.05V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12L	jb	XC6372A282P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
12M	-	XC6503P31APR-G	LVR-IC	LDO, 3.15V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12M	jb	XC6372A292P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
12N	-	XC6503P32APR-G	LVR-IC	LDO, 3.25V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12P	-	XC6503P33APR-G	LVR-IC	LDO, 3.35V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
12R	-	XC6503P34APR-G	LVR-IC	LDO, 3.45V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12S	-	XC6503P35APR-G	LVR-IC	LDO, 3.55V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12T	-	XC6503P36APR-G	LVR-IC	LDO, 3.65V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12U	-	XC6503P37APR-G	LVR-IC	LDO, 3.75V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12V	-	XC6503P38APR-G	LVR-IC	LDO, 3.85V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12X	-	XC6503P39APR-G	LVR-IC	LDO, 3.95V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12Y	-	BZV49-C12	Z-diode	12V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
12Y	-	XC6503P40APR-G	LVR-IC	LDO, 4.05V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
12Z	-	XC6503P41APR-G	LVR-IC	LDO, 4.15V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
13	-	ELM9713NAB	Vdet-IC	1.3V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
130	-	XC6503P42APR-G	LVR-IC	LDO, 4.25V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
130	jb	XC6372A301P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
131	-	XC6503P43APR-G	LVR-IC	LDO, 4.35V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
131	jb	XC6372A311P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
132	-	XC6503P44APR-G	LVR-IC	LDO, 4.45V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
132	jb	XC6372A321P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
133	-	XC6503P45APR-G	LVR-IC	LDO, 4.55V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
133	jb	XC6372A331P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
134	-	XC6503P46APR-G	LVR-IC	LDO, 4.65V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
134	jb	XC6372A341P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
135	-	XC6503P47APR-G	LVR-IC	LDO, 4.75V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
135	jb	XC6372A351P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
136	-	XC6503P48APR-G	LVR-IC	LDO, 4.85V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
136	jb	XC6372A361P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
137	-	XC6503P49APR-G	LVR-IC	LDO, 4.95V±1%, 500mA	SOT-89	20ch	VR1	4a	Tor
137	jb	XC6372A371P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
138	jb	XC6372A381P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
139	jb	XC6372A391P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
13A	jb	XC6372A302P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
13B	jb	XC6372A312P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
13C	jb	XC6372A322P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
13D	jb	XC6372A332P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
13E	jb	XC6372A342P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
13F	jb	XC6372A352P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
13H	jb	XC6372A362P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
13K	jb	XC6372A372P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
13L	jb	XC6372A382P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
13M	jb	XC6372A392P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
13Y	-	BZV49-C13	Z-diode	13V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
14	-	ELM9714NAB	Vdet-IC	1.4V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
140	jb	XC6372A401P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
141	jb	XC6372A411P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
142	jb	XC6372A421P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
143	jb	XC6372A431P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
144	jb	XC6372A441P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
145	jb	XC6372A451P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
146	jb	XC6372A461P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
147	-	FCX1147A	Si-pnp	Lo-sat, 15V, 3A, 2W, B=250..850, 115MHz	SOT-89	20tb	-	4b	Zx
147	jb	XC6372A471P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
148	jb	XC6372A481P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
149	-	FCX1149A	Si-pnp	Sw, 30V, 3A, 2W, B=250..850, 135MHz	SOT-89	20tb	-	4b	Zx
149	jb	XC6372A491P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
14A	jb	XC6372A402P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
14B	jb	XC6372A412P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
14C	jb	XC6372A422P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
14D	jb	XC6372A432P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
14E	jb	XC6372A442P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
14F	jb	XC6372A452P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
14H	jb	XC6372A462P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
14K	jb	XC6372A472P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
14L	jb	XC6372A482P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
14M	jb	XC6372A492P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
15	-	ELM9715NAB	Vdet-IC	1.5V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
150	jb	XC6372A501P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
151	-	FCX1151A	Si-pnp	Lo-sat, 45V, 3A, 2W, B=250..800, 145MHz	SOT-89	20tb	-	4b	Zx
151	jb	XC6372A511P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
152	jb	XC6372A521P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
153	jb	XC6372A531P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
154	jb	XC6372A541P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
155	jb	XC6372A551P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
156	jb	XC6372A561P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
157	jb	XC6372A571P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
158	jb	XC6372A581P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
159	jb	XC6372A591P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
15A	jb	XC6372A502P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
15B	jb	XC6372A512P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
15C	-	XC6201P132PR	LVR-IC	1.3V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15C	jb	XC6372A522P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
15D	-	XC6201P142PR	LVR-IC	1.4V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15D	jb	XC6372A532P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
15E	-	XC6201P152PR	LVR-IC	1.5V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15E	jb	XC6372A542P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
15F	-	XC6201P162PR	LVR-IC	1.6V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15F	jb	XC6372A552P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
15H	-	XC6201P172PR	LVR-IC	1.7V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15H	jb	XC6372A562P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
15K	-	XC6201P182PR	LVR-IC	1.8V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15K	jb	XC6372A572P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
15L	-	XC6201P192PR	LVR-IC	1.9V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15L	jb	XC6372A582P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
15M	-	XC6201P202PR	LVR-IC	2.0V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15M	jb	XC6372A592P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
15N	-	XC6201P212PR	LVR-IC	2.1V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15P	-	XC6201P222PR	LVR-IC	2.2V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15R	-	XC6201P232PR	LVR-IC	2.3V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15S	-	XC6201P242PR	LVR-IC	2.4V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15T	-	XC6201P252PR	LVR-IC	2.5V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15U	-	XC6201P262PR	LVR-IC	2.6V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15V	-	XC6201P272PR	LVR-IC	2.7V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15X	-	XC6201P282PR	LVR-IC	2.8V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15Y	-	BZV49-C15	Z-diode	15V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
15Y	-	XC6201P292PR	LVR-IC	2.9V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
15Z	-	XC6201P302PR	LVR-IC	3.0V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16	-	ELM9716NAB	Vdet-IC	1.6V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
160	-	XC6201P312PR	LVR-IC	3.1V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
160	jb	XC6372A601P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
161	-	XC6201P322PR	LVR-IC	3.2V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
161	jb	XC6372A611P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
162	-	XC6201P332PR	LVR-IC	3.3V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
162	jb	XC6372A621P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1621R	-	KSD1621-R	Si-npn	AF-Drv, 30V, 2A, 500mW, B=100..200, >150MHz	SOT-89	20tb	-	4b	F
1621S	-	KSD1621-S	Si-npn	AF-Drv, 30V, 2A, 500mW, B=140..280, >150MHz	SOT-89	20tb	-	4b	F
1621T	-	KSD1621-T	Si-npn	AF-Drv, 30V, 2A, 500mW, B=200..400, >150MHz	SOT-89	20tb	-	4b	F
1621U	-	KSD1621-U	Si-npn	AF-Drv, 30V, 2A, 500mW, B=280..560, >150MHz	SOT-89	20tb	-	4b	F
163	-	XC6201P342PR	LVR-IC	3.4V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
163	jb	XC6372A631P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
164	-	XC6201P352PR	LVR-IC	3.5V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
164	jb	XC6372A641P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
165	-	XC6201P362PR	LVR-IC	3.6V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
165	jb	XC6372A651P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
166	-	XC6201P372PR	LVR-IC	3.7V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
166	jb	XC6372A661P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
167	-	XC6201P382PR	LVR-IC	3.8V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
167	jb	XC6372A671P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
168	-	XC6201P392PR	LVR-IC	3.9V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
168	jb	XC6372A681P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
169	-	XC6201P402PR	LVR-IC	4.0V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
169	jb	XC6372A691P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1697	-	2DB1697	Si-pnp	AF, Sw, 15V, 2A, 900mW, B=270..680, 140MHz	SOT-89	20tb	-	4m	Di
16A	-	XC6201P412PR	LVR-IC	4.1V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16A	jb	XC6372A602P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
16B	-	XC6201P422PR	LVR-IC	4.2V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16B	jb	XC6372A612P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
16C	-	XC6201P432PR	LVR-IC	4.3V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16C	jb	XC6372A622P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
16D	-	XC6201P442PR	LVR-IC	4.4V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16D	jb	XC6372A632P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
16E	-	XC6201P452PR	LVR-IC	4.5V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16E	jb	XC6372A642P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
16F	-	XC6201P462PR	LVR-IC	4.6V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
16F	jb	XC6372A652P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
16H	-	XC6201P472PR	LVR-IC	4.7V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16H	jb	XC6372A662P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
16K	-	XC6201P482PR	LVR-IC	4.8V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16K	jb	XC6372A672P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
16L	-	XC6201P492PR	LVR-IC	4.9V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16L	jb	XC6372A682P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
16M	-	XC6201P502PR	LVR-IC	5.0V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16M	jb	XC6372A692P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
16N	-	XC6201P512PR	LVR-IC	5.1V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16P	-	XC6201P522PR	LVR-IC	5.2V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16R	-	XC6201P532PR	LVR-IC	5.3V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16S	-	XC6201P542PR	LVR-IC	5.4V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16T	-	XC6201P552PR	LVR-IC	5.5V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16U	-	XC6201P562PR	LVR-IC	5.6V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16V	-	XC6201P572PR	LVR-IC	5.7V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16X	-	XC6201P582PR	LVR-IC	5.8V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16Y	-	BZV49-C16	Z-diode	16V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
16Y	-	XC6201P592PR	LVR-IC	5.9V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
16Z	-	XC6201P602PR	LVR-IC	6.0V±2%, 250mA	SOT-89	20ch	VR1	4c	Tor
17	-	ELM9717NAB	Vdet-IC	1.7V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
170	jb	XC6372A701P	DC-DC-IC	PWM/PFM step-up, 100kHz, 7.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1713	-	2DB1713	Si-pnp	AF, Sw, 15V, 3A, 900mW, B=270..680, 180MHz	SOT-89	20tb	-	4m	Di
1714	-	2DB1714	Si-pnp	AF, Sw, 30V, 2A, 900mW, B=270..680, 200MHz	SOT-89	20tb	-	4m	Di
1766	-	2SC1766PT-P	Si-npn	AF, Sw, 50V, 2A, B=82..180, 120MHz	SOT-89	20tb	-	4b	Chm
1797	-	2DA1797	Si-pnp	AF, Sw, 50V, 3A, 900mW, B=82..270, 160MHz	SOT-89	20tb	-	4m	Di
17A	jb	XC6372A702P	DC-DC-IC	PWM/PFM step-up, 180kHz, 7.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
18	-	ELM9718NAB	Vdet-IC	1.8V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
18	-	UTC8118	Vdet-IC	1.8V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
18A	-	AAT60018A-S16	Vdet-IC	1.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
18B	-	AAT60018B-S16	Vdet-IC	1.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
18C	-	AAT60018C-S16	Vdet-IC	1.8V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
18D	-	AAT60018D-S16	Vdet-IC	1.8V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
18Y	-	BZV49-C18	Z-diode	18V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
19	-	ELM9719NAB	Vdet-IC	1.9V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
19	-	Gali-19	MMIC	RF amplifier, DC..7GHz, 11dB (50Ω)	SOT-89	20aa	A1	4b	Mc
19	-	UTC8119	Vdet-IC	1.9V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
19A	-	AAT60019A-S16	Vdet-IC	1.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
19B	-	AAT60019B-S16	Vdet-IC	1.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
19C	-	AAT60019C-S16	Vdet-IC	1.9V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
19D	-	AAT60019D-S16	Vdet-IC	1.9V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
1A	-	2T664A9	Si-pnp	GP, 120V, 1A, 300mW, B=40..250, 140MHz	SOT-89	20tb	-	4g	Rus
1A	-	PXT3904	Si-npn	Sw, 60V, 100mA, 1.2W, B=100..300, >300MHz	SOT-89	20tb	-	4a	Kex
1A	-	SXT3904	Si-npn	GP, 60V, 0.1A, 200mW, B= 100..300, >300MHz	SOT-89	20tb	-	4b	Sie
1B	-	RH5RL21AA	LVR-IC	2.1V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
1B0	-	TC55RP112EMB	LVR-IC	LDO, 1.1V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
1C	-	RH5RL31AA	LVR-IC	3.1V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
1C0	-	TC55RP122EMB	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
1C0	jb	XC6372A200P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1C1	jb	XC6372A210P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1C2	jb	XC6372A220P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1C3	jb	XC6372A230P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1C4	jb	XC6372A240P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1C5	jb	XC6372A250P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1C6	jb	XC6372A260P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1C7	jb	XC6372A270P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1C8	jb	XC6372A280P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1C9	jb	XC6372A290P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1D	-	RH5RL41AA	LVR-IC	4.1V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
1D	-	SXTA42	Si-npn	Vid, 300V, 500mA, 1W, B>40, >50MHz	SOT-89	20tb	-	4b	Sie
1D0	-	TC55RP132EMB	LVR-IC	LDO, 1.3V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
1D0	jb	XC6372A300P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1D1	jb	XC6372A310P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1D2	jb	XC6372A320P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1D3	jb	XC6372A330P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1D4	jb	XC6372A340P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1D5	jb	XC6372A350P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1D6	jb	XC6372A360P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1D7	jb	XC6372A370P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1D8	jb	XC6372A380P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1D9	jb	XC6372A390P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1E	-	2SA1737	Si-pnp	Vid, 85V, 100mA, 1W, 50MHz, B>60	SC-62	20tb	-	4g	Pan
1E	-	RH5RL51AA	LVR-IC	5.1V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
1E	-	SXTA43	Si-npn	Vid, 200V, 500mA, 1W, B>40, >50MHz	SOT-89	20tb	-	4b	Sie
1E0	-	TC55RP142EMB	LVR-IC	LDO, 1.4V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
1E0	jb	XC6372A400P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1E1	jb	XC6372A410P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1E2	jb	XC6372A420P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1E3	jb	XC6372A430P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1E4	jb	XC6372A440P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1E5	jb	XC6372A450P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1E6	jb	XC6372A460P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1E7	jb	XC6372A470P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1E8	jb	XC6372A480P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1E9	jb	XC6372A490P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1F	-	2SC4543	Si-npn	Vid, 110V, 300mA, 1W, B>20, 350MHz	SOT-89	20tb	-	4b	Pan
1F0	-	TC55RP152EMB	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
1F0	jb	XC6372A500P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1F1	jb	XC6372A510P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1F2	jb	XC6372A520P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1F3	jb	XC6372A530P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1F4	jb	XC6372A540P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1F5	jb	XC6372A550P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1F6	jb	XC6372A560P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1F7	jb	XC6372A570P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1F8	jb	XC6372A580P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1F9	jb	XC6372A590P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1H0	-	TC55RP162EMB	LVR-IC	LDO, 1.6V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
1H0	jb	XC6372A600P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1H1	jb	XC6372A610P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1H2	jb	XC6372A620P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1H3	jb	XC6372A630P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1H4	jb	XC6372A640P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1H5	jb	XC6372A650P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1H6	jb	XC6372A660P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1H7	jb	XC6372A670P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1H8	jb	XC6372A680P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1H9	jb	XC6372A690P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1HR	-	2SD2185-R	Si-npn	AF-Drv, 50V, 3A, 1W, B=120..240, 120MHz	SOT-89	20tb	-	4g	Pan
1HS	-	2SD2185-S	Si-npn	AF-Drv, 50V, 3A, 1W, B=170..340, 120MHz	SOT-89	20tb	-	4g	Pan
1IR	-	2SB1440-R	Si-pnp	AF-Amp, 50V, 2A, 1W, B=120..240, 150MHz	SOT-89	20tb	-	4b	Pan
1IS	-	2SB1440-S	Si-pnp	AF-Amp, 50V, 2A, 1W, B=170..340, 150MHz	SOT-89	20tb	-	4b	Pan
1J	-	RH5RE21AA	LVR-IC	Ultra-LDO, 2.1V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
1K	-	RH5RE31AA	LVR-IC	Ultra-LDO, 3.1V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
1K0	-	TC55RP172EMB	LVR-IC	LDO, 1.7V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
1K0	jb	XC6372A700P	DC-DC-IC	PWM/PFM step-up, 50kHz, 7.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
1L	-	2SB1537	Si-pnp	AF, Lo-sat, 10V, 1A, 1W, B=200..800, 120MHz	SOT-89	20tb	-	4b	Pan
1L	-	RH5RE41AA	LVR-IC	Ultra-LDO, 4.1V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
1L0	-	TC55RP182EMB	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
1M	-	2SD2357	Si-npn	AF, Lo-sat, 10V, 1A, 1W, B=200..800, 100MHz	SOT-89	20tb	-	4b	Pan
1M	-	RH5RE51AA	LVR-IC	Ultra-LDO, 5.1V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
1M0	-	TC55RP192EMB	LVR-IC	LDO, 1.9V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
1M3	-	ZXTP19100CZ	Si-pnp	Drv, 100V, 2A, 2.4W, B=200..500, 142MHz	SOT-89	20tb	-	4g	Zx
1N	-	2SB1539	Si-pnp	AF, Lo-sat, 20V, 1A, 1W, B=200..800, 120MHz	SOT-89	20tb	-	4b	Pan
1O	-	2SD2359	Si-npn	AF, Lo-sat, 20V, 1A, 1W, B=200..800, 100MHz	SOT-89	20tb	-	4b	Pan
1P	-	PXT2222A	Si-npn	GP, 75V, 600mA, 1.25W, B=100..300, >300MHz	SOT-89	20tb	-	4a	Kex
1P	-	WTM2222A	Si-npn	Sw, 75V, 600mA, 1.2W, B=35..300, >300MHz	SOT-89	20tb	-	4b	Wtr
1R	-	2SC4929	Si-npn	Sw, 500/400V, 800mA, 80MHz	SOT-89	20tb	-	4b	Pan
1S	-	2SD2413	Si-npn	AF-Drv, 400V, 100mA, 1W, B>30, 40MHz	SOT-89	20tb	-	4b	Pan
1T	-	2SD2416	Si-npn-Darl+Di	Sw, 60V, 1A, 150MHz, B=6.5k..40k, Z-Di (E->C)	SOT-89	20tb	-	4b	Pan
1V	-	2SD2441	Si-npn	Lo-sat, 10V, 2A, 1W, B=200..700, 190MHz	SOT-89	20tb	-	4b	Pan
1W	-	2SC5019	Si-npn	UHF, LN, 15V, 80mA, 1W, B=80..250, 6GHz	SOT-89	20tb	-	4b	Pan
1XP	-	2SB1599-P	Si-pnp	AF, 50V, 1.5A, 1W, B=50..100, 150MHz	SOT-89	20tb	-	4b	Pan
1XQ	-	2SB1599-Q	Si-pnp	AF, 50V, 1.5A, 1W, B=80..160, 150MHz	SOT-89	20tb	-	4b	Pan
1XR	-	2SB1599-R	Si-pnp	AF, 50V, 1.5A, 1W, B=100..220, 150MHz	SOT-89	20tb	-	4b	Pan
1YP	-	2SD2457-P	Si-npn	AF, 50V, 1.5A, 1W, B=60..120, 150MHz	SOT-89	20tb	-	4b	Pan
1YQ	-	2SD2457-Q	Si-npn	AF, 50V, 1.5A, 1W, B=80..160, 150MHz	SOT-89	20tb	-	4b	Pan
1YR	-	2SD2457-R	Si-npn	AF, 50V, 1.5A, 1W, B=120..240, 150MHz	SOT-89	20tb	-	4b	Pan
1ZQ	-	2SA1890-Q	Si-pnp	AF-Drv, 80V, 1A, 1W, B=120..240, 120MHz	SOT-89	20tb	-	4b	Pan
1ZR	-	2SA1890-R	Si-pnp	AF-Drv, 80V, 1A, 1W, B=270..340, 120MHz	SOT-89	20tb	-	4b	Pan





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1Б	-	2Т664Б9	Si-pnp	GP, 100V, 1A, 300mW, B=40..250, 140MHz	SOT-89	20tb	-	4g	Rus
20	-	ELM9720NAB	Vdet-IC	2.0V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
20	-	UTC8120	Vdet-IC	2.0V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
20A	-	AAT60020A-S16	Vdet-IC	2.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
20B	-	AAT60020B-S16	Vdet-IC	2.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
20C	-	AAT60020C-S16	Vdet-IC	2.0V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
20D	-	AAT60020D-S16	Vdet-IC	2.0V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
20Y	-	BZV49-C20	Z-diode	20V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
21	-	ELM9721NAB	Vdet-IC	2.1V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
21	-	Gali-21	MMIC	RF amplifier, DC..8GHz, 12.4dB (50Ω)	SOT-89	20aa	A1	4b	Mc
21	-	UTC8121	Vdet-IC	2.1V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
21A	-	AAT60021A-S16	Vdet-IC	2.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
21B	-	AAT60021B-S16	Vdet-IC	2.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
21C	-	AAT60021C-S16	Vdet-IC	2.1V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
21D	-	AAT60021D-S16	Vdet-IC	2.1V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
22	-	ELM9722NAB	Vdet-IC	2.2V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
22	-	UTC8122	Vdet-IC	2.2V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
2222A	-	WTM2222A	Si-npn	Sw, 75V, 600mA, 1.2W, B=35..300, >300MHz	SOT-89	20tb	-	4b	Wtr
22A	-	AAT60022A-S16	Vdet-IC	2.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
22B	-	AAT60022B-S16	Vdet-IC	2.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
22C	-	AAT60022C-S16	Vdet-IC	2.2V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
22D	-	AAT60022D-S16	Vdet-IC	2.2V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
22Y	-	BZV49-C22	Z-diode	22V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
23	-	ELM9723NAB	Vdet-IC	2.3V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
23	-	UTC8123	Vdet-IC	2.3V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
23A	-	AAT60023A-S16	Vdet-IC	2.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
23B	-	AAT60023B-S16	Vdet-IC	2.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
23C	-	AAT60023C-S16	Vdet-IC	2.3V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
23D	-	AAT60023D-S16	Vdet-IC	2.3V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
24	-	ELM9724NAB	Vdet-IC	2.4V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
24	-	UTC8124	Vdet-IC	2.4V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
24A	-	AAT60024A-S16	Vdet-IC	2.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
24B	-	AAT60024B-S16	Vdet-IC	2.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
24C	-	AAT60024C-S16	Vdet-IC	2.4V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
24D	-	AAT60024D-S16	Vdet-IC	2.4V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
24K	-	XC6202P182PR	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
24L	-	XC6202P192PR	LVR-IC	LDO, 1.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
24M	-	XC6202P202PR	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
24M	-	XC6216D202PR	LVR-IC	2.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
24N	-	XC6202P212PR	LVR-IC	LDO, 2.1V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
24N	-	XC6216D212PR	LVR-IC	2.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
24P	-	XC6202P222PR	LVR-IC	LDO, 2.2V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
24P	-	XC6216D222PR	LVR-IC	2.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
24R	-	XC6202P232PR	LVR-IC	LDO, 2.3V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
24R	-	XC6216D232PR	LVR-IC	2.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
24S	-	XC6202P242PR	LVR-IC	LDO, 2.4V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
24S	-	XC6216D242PR	LVR-IC	2.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
24T	-	XC6202P252PR	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
24T	-	XC6216D252PR	LVR-IC	2.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
24U	-	XC6202P262PR	LVR-IC	LDO, 2.6V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
24U	-	XC6216D262PR	LVR-IC	2.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
24V	-	XC6202P272PR	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
24V	-	XC6216D272PR	LVR-IC	2.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
24X	-	XC6202P282PR	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
24X	-	XC6216D282PR	LVR-IC	2.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
24Y	-	BZV49-C24	Z-diode	24V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
24Y	-	XC6202P292PR	LVR-IC	LDO, 2.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
24Y	-	XC6216D292PR	LVR-IC	2.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
24Z	-	XC6202P302PR	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
24Z	-	XC6216D302PR	LVR-IC	3.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25	-	ELM9725NAB	Vdet-IC	2.5V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
25	-	UTC8125	Vdet-IC	2.5V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
250	-	XC6202P312PR	LVR-IC	LDO, 3.1V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
250	-	XC6216D312PR	LVR-IC	3.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
251	-	XC6202P322PR	LVR-IC	LDO, 3.2V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
251	-	XC6216D322PR	LVR-IC	3.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
252	-	XC6202P332PR	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
252	-	XC6216D332PR	LVR-IC	3.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
253	-	XC6202P342PR	LVR-IC	LDO, 3.4V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
253	-	XC6216D342PR	LVR-IC	3.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
254	-	XC6202P352PR	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
254	-	XC6216D352PR	LVR-IC	3.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
255	-	XC6202P362PR	LVR-IC	LDO, 3.6V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
255	-	XC6216D362PR	LVR-IC	3.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
256	-	XC6202P372PR	LVR-IC	LDO, 3.7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
256	-	XC6216D372PR	LVR-IC	3.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
257	-	XC6202P382PR	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
257	-	XC6216D382PR	LVR-IC	3.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
258	-	XC6202P392PR	LVR-IC	LDO, 3.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
258	-	XC6216D392PR	LVR-IC	3.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
259	-	XC6202P402PR	LVR-IC	LDO, 4.0V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
259	-	XC6216D402PR	LVR-IC	4.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25A	-	AAT60025A-S16	Vdet-IC	2.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
25A	-	XC6202P412PR	LVR-IC	LDO, 4.1V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25A	-	XC6216D412PR	LVR-IC	4.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25B	-	AAT60025B-S16	Vdet-IC	2.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
25B	-	XC6202P422PR	LVR-IC	LDO, 4.2V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25B	-	XC6216D422PR	LVR-IC	4.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25C	-	AAT60025C-S16	Vdet-IC	2.5V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
25C	-	XC6202P432PR	LVR-IC	LDO, 4.3V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25C	-	XC6216D432PR	LVR-IC	4.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25D	-	AAT60025D-S16	Vdet-IC	2.5V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
25D	-	XC6202P442PR	LVR-IC	LDO, 4.4V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25D	-	XC6216D442PR	LVR-IC	4.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25E	-	XC6202P452PR	LVR-IC	LDO, 4.5V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25E	-	XC6216D452PR	LVR-IC	4.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25F	-	XC6202P462PR	LVR-IC	LDO, 4.6V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25F	-	XC6216D462PR	LVR-IC	4.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25H	-	XC6202P472PR	LVR-IC	LDO, 4.7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25H	-	XC6216D472PR	LVR-IC	4.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25K	-	XC6202P482PR	LVR-IC	LDO, 4.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25K	-	XC6216D482PR	LVR-IC	4.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25L	-	XC6202P492PR	LVR-IC	LDO, 4.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25L	-	XC6216D492PR	LVR-IC	4.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25M	-	XC6202P502PR	LVR-IC	LDO, 5.0V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25M	-	XC6216D502PR	LVR-IC	5.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25N	-	XC6202P512PR	LVR-IC	LDO, 5.1V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25N	-	XC6216D512PR	LVR-IC	5.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25P	-	XC6202P522PR	LVR-IC	LDO, 5.2V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25P	-	XC6216D522PR	LVR-IC	5.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25R	-	XC6202P532PR	LVR-IC	LDO, 5.3V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25R	-	XC6216D532PR	LVR-IC	5.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25S	-	XC6202P542PR	LVR-IC	LDO, 5.4V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25S	-	XC6216D542PR	LVR-IC	5.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25T	-	XC6202P552PR	LVR-IC	LDO, 5.5V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25T	-	XC6216D552PR	LVR-IC	5.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25U	-	XC6202P562PR	LVR-IC	LDO, 5.6V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25U	-	XC6216D562PR	LVR-IC	5.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25V	-	XC6202P572PR	LVR-IC	LDO, 5.7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25V	-	XC6216D572PR	LVR-IC	5.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25X	-	XC6202P582PR	LVR-IC	LDO, 5.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25X	-	XC6216D582PR	LVR-IC	5.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25Y	-	XC6202P592PR	LVR-IC	LDO, 5.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25Y	-	XC6216D592PR	LVR-IC	5.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
25Z	-	XC6202P602PR	LVR-IC	LDO, 6.0V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
25Z	-	XC6216D602PR	LVR-IC	6.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26	-	ELM9726NAB	Vdet-IC	2.6V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
26	-	UTC8126	Vdet-IC	2.6V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
260	-	XC6202P612PR	LVR-IC	LDO, 6.1V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
260	-	XC6216D612PR	LVR-IC	6.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
261	-	XC6202P622PR	LVR-IC	LDO, 6.2V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
261	-	XC6216D622PR	LVR-IC	6.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
262	-	XC6202P632PR	LVR-IC	LDO, 6.3V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
262	-	XC6216D632PR	LVR-IC	6.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
263	-	XC6202P642PR	LVR-IC	LDO, 6.4V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
263	-	XC6216D642PR	LVR-IC	6.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
264	-	XC6202P652PR	LVR-IC	LDO, 6.5V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
264	-	XC6216D652PR	LVR-IC	6.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
265	-	XC6202P662PR	LVR-IC	LDO, 6.6V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
265	-	XC6216D662PR	LVR-IC	6.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
266	-	XC6202P672PR	LVR-IC	LDO, 6.7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
266	-	XC6216D672PR	LVR-IC	6.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
267	-	XC6202P682PR	LVR-IC	LDO, 6.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
267	-	XC6216D682PR	LVR-IC	6.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
268	-	XC6202P692PR	LVR-IC	LDO, 6.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
268	-	XC6216D692PR	LVR-IC	6.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
269	-	XC6202P702PR	LVR-IC	LDO, 7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
269	-	XC6216D702PR	LVR-IC	7.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26A	-	AAT60026A-S16	Vdet-IC	2.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
26A	-	XC6202P712PR	LVR-IC	LDO, 7.1V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26A	-	XC6216D712PR	LVR-IC	7.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26B	-	AAT60026B-S16	Vdet-IC	2.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
26B	-	XC6202P722PR	LVR-IC	LDO, 7.2V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26B	-	XC6216D722PR	LVR-IC	7.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26C	-	AAT60026C-S16	Vdet-IC	2.6V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
26C	-	XC6202P732PR	LVR-IC	LDO, 7.3V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26C	-	XC6216D732PR	LVR-IC	7.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26D	-	AAT60026D-S16	Vdet-IC	2.6V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
26D	-	XC6202P742PR	LVR-IC	LDO, 7.4V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26D	-	XC6216D742PR	LVR-IC	7.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26E	-	XC6202P752PR	LVR-IC	LDO, 7.5V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26E	-	XC6216D752PR	LVR-IC	7.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26F	-	XC6202P762PR	LVR-IC	LDO, 7.6V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26F	-	XC6216D762PR	LVR-IC	7.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26H	-	XC6202P772PR	LVR-IC	LDO, 7.7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26H	-	XC6216D772PR	LVR-IC	7.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26K	-	XC6202P782PR	LVR-IC	LDO, 7.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26K	-	XC6216D782PR	LVR-IC	7.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26L	-	XC6202P792PR	LVR-IC	LDO, 7.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26L	-	XC6216D792PR	LVR-IC	7.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26M	-	XC6202P802PR	LVR-IC	LDO, 8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26M	-	XC6216D802PR	LVR-IC	8.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26N	-	XC6202P812PR	LVR-IC	LDO, 8.1V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26N	-	XC6216D812PR	LVR-IC	8.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26P	-	XC6202P822PR	LVR-IC	LDO, 8.2V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26P	-	XC6216D822PR	LVR-IC	8.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26R	-	XC6202P832PR	LVR-IC	LDO, 8.3V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26R	-	XC6216D832PR	LVR-IC	8.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26S	-	XC6202P842PR	LVR-IC	LDO, 8.4V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26S	-	XC6216D842PR	LVR-IC	8.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26T	-	XC6202P852PR	LVR-IC	LDO, 8.5V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26T	-	XC6216D852PR	LVR-IC	8.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26U	-	XC6202P862PR	LVR-IC	LDO, 8.6V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26U	-	XC6216D862PR	LVR-IC	8.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26V	-	XC6202P872PR	LVR-IC	LDO, 8.7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26V	-	XC6216D872PR	LVR-IC	8.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26X	-	XC6202P882PR	LVR-IC	LDO, 8.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26X	-	XC6216D882PR	LVR-IC	8.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26Y	-	XC6202P892PR	LVR-IC	LDO, 8.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26Y	-	XC6216D892PR	LVR-IC	8.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
26Z	-	XC6202P902PR	LVR-IC	LDO, 9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
26Z	-	XC6216D902PR	LVR-IC	9.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27	-	ELM9727NAB	Vdet-IC	2.7V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
27	-	UTC8127	Vdet-IC	2.7V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
270	-	XC6202P912PR	LVR-IC	LDO, 9.1V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
270	-	XC6216D912PR	LVR-IC	9.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
271	-	XC6202P922PR	LVR-IC	LDO, 9.2V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
271	-	XC6216D922PR	LVR-IC	9.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
272	-	XC6202P932PR	LVR-IC	LDO, 9.3V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
272	-	XC6216D932PR	LVR-IC	9.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
273	-	XC6202P942PR	LVR-IC	LDO, 9.4V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
273	-	XC6216D942PR	LVR-IC	9.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
274	-	XC6202P952PR	LVR-IC	LDO, 9.5V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
274	-	XC6216D952PR	LVR-IC	9.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
275	-	XC6202P962PR	LVR-IC	LDO, 9.6V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
275	-	XC6216D962PR	LVR-IC	9.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
276	-	XC6202P972PR	LVR-IC	LDO, 9.7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
276	-	XC6216D972PR	LVR-IC	9.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
277	-	XC6202P982PR	LVR-IC	LDO, 9.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
277	-	XC6216D982PR	LVR-IC	9.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
278	-	XC6202P992PR	LVR-IC	LDO, 9.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
278	-	XC6216D992PR	LVR-IC	9.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
279	-	XC6202PA02PR	LVR-IC	LDO, 10V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
279	-	XC6216DA02PR	LVR-IC	10.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27A	-	AAT60027A-S16	Vdet-IC	2.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
27A	-	XC6202PA12PR	LVR-IC	LDO, 10.1V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27A	-	XC6216DA12PR	LVR-IC	10.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27B	-	AAT60027B-S16	Vdet-IC	2.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
27B	-	XC6202PA22PR	LVR-IC	LDO, 10.2V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27B	-	XC6216DA22PR	LVR-IC	10.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27C	-	AAT60027C-S16	Vdet-IC	2.7V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
27C	-	XC6202PA32PR	LVR-IC	LDO, 10.3V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27C	-	XC6216DA32PR	LVR-IC	10.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27D	-	AAT60027D-S16	Vdet-IC	2.7V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
27D	-	XC6202PA42PR	LVR-IC	LDO, 10.4V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27D	-	XC6216DA42PR	LVR-IC	10.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27E	-	XC6202PA52PR	LVR-IC	LDO, 10.5V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27E	-	XC6216DA52PR	LVR-IC	10.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27F	-	XC6202PA62PR	LVR-IC	LDO, 10.6V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27F	-	XC6216DA62PR	LVR-IC	10.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27H	-	XC6202PA72PR	LVR-IC	LDO, 10.7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27H	-	XC6216DA72PR	LVR-IC	10.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27K	-	XC6202PA82PR	LVR-IC	LDO, 10.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27K	-	XC6216DA82PR	LVR-IC	10.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27L	-	XC6202PA92PR	LVR-IC	LDO, 10.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27L	-	XC6216DA92PR	LVR-IC	10.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27M	-	XC6202PB02PR	LVR-IC	LDO, 11V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27M	-	XC6216DB02PR	LVR-IC	11.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27N	-	XC6202PB12PR	LVR-IC	LDO, 11.1V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27N	-	XC6216DB12PR	LVR-IC	11.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27P	-	XC6202PB22PR	LVR-IC	LDO, 11.2V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27P	-	XC6216DB22PR	LVR-IC	11.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27R	-	XC6202PB32PR	LVR-IC	LDO, 11.3V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27R	-	XC6216DB32PR	LVR-IC	11.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27S	-	XC6202PB42PR	LVR-IC	LDO, 11.4V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27S	-	XC6216DB42PR	LVR-IC	11.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27T	-	XC6202PB52PR	LVR-IC	LDO, 11.5V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27T	-	XC6216DB52PR	LVR-IC	11.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27U	-	XC6202PB62PR	LVR-IC	LDO, 11.6V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27U	-	XC6216DB62PR	LVR-IC	11.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27V	-	XC6202PB72PR	LVR-IC	LDO, 11.7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27V	-	XC6216DB72PR	LVR-IC	11.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27X	-	XC6202PB82PR	LVR-IC	LDO, 11.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27X	-	XC6216DB82PR	LVR-IC	11.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27Y	-	BZV49-C27	Z-diode	27V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Phi
27Y	-	XC6202PB92PR	LVR-IC	LDO, 11.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27Y	-	XC6216DB92PR	LVR-IC	11.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
27Z	-	XC6202PC02PR	LVR-IC	LDO, 12V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
27Z	-	XC6216DC02PR	LVR-IC	12.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
28	-	ELM9728NAB	Vdet-IC	2.8V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
28	-	UTC8128	Vdet-IC	2.8V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
280	-	XC6202PC12PR	LVR-IC	LDO, 12.1V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
281	-	XC6202PC22PR	LVR-IC	LDO, 12.2V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
282	-	XC6202PC32PR	LVR-IC	LDO, 12.3V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
283	-	XC6202PC42PR	LVR-IC	LDO, 12.4V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
284	-	XC6202PC52PR	LVR-IC	LDO, 12.5V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
285	-	XC6202PC62PR	LVR-IC	LDO, 12.6V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
286	-	XC6202PC72PR	LVR-IC	LDO, 12.7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
287	-	XC6202PC82PR	LVR-IC	LDO, 12.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
288	-	XC6202PC92PR	LVR-IC	LDO, 12.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
2881O	-	KSC2881-O	Si-npn	AF, Sw, 120V, 800mA, 500mW, B=300..450, >120MHz	SOT-89	20tb	-	4n	F
2881Y	-	KSC2881-Y	Si-npn	AF, Sw, 120V, 800mA, 500mW, B=120..240, >120MHz	SOT-89	20tb	-	4n	F
2883O	-	KSC2883-O	Si-npn	AF-Drv, 30V, 1.5A, 500mW, B=100..200, >120MHz	SOT-89	20tb	-	4n	F
2883Y	-	KSC2883-Y	Si-npn	AF-Drv, 30V, 1.5A, 500mW, B=160..320, >120MHz	SOT-89	20tb	-	4n	F
289	-	XC6202PD02PR	LVR-IC	LDO, 13V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28A	-	AAT60028A-S16	Vdet-IC	2.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
28A	-	XC6202PD12PR	LVR-IC	LDO, 13.1V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28B	-	AAT60028B-S16	Vdet-IC	2.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
28B	-	XC6202PD22PR	LVR-IC	LDO, 13.2V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28C	-	AAT60028C-S16	Vdet-IC	2.8V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
28C	-	XC6202PD32PR	LVR-IC	LDO, 13.3V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28D	-	AAT60028D-S16	Vdet-IC	2.8V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
28D	-	XC6202PD42PR	LVR-IC	LDO, 13.4V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28E	-	XC6202PD52PR	LVR-IC	LDO, 13.5V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28F	-	XC6202PD62PR	LVR-IC	LDO, 13.6V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28H	-	XC6202PD72PR	LVR-IC	LDO, 13.7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28K	-	XC6202PD82PR	LVR-IC	LDO, 13.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28L	-	XC6202PD92PR	LVR-IC	LDO, 13.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28M	-	XC6202PE02PR	LVR-IC	LDO, 14V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28N	-	XC6202PE12PR	LVR-IC	LDO, 14.1V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28P	-	XC6202PE22PR	LVR-IC	LDO, 14.2V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28R	-	XC6202PE32PR	LVR-IC	LDO, 14.3V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28S	-	XC6202PE42PR	LVR-IC	LDO, 14.4V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28T	-	XC6202PE52PR	LVR-IC	LDO, 14.5V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28U	-	XC6202PE62PR	LVR-IC	LDO, 14.6V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28V	-	XC6202PE72PR	LVR-IC	LDO, 14.7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28X	-	XC6202PE82PR	LVR-IC	LDO, 14.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28Y	-	XC6202PE92PR	LVR-IC	LDO, 14.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
28Z	-	XC6202PF02PR	LVR-IC	LDO, 15V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29	-	ELM9729NAB	Vdet-IC	2.9V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
29	-	Gali-29	MMIC	RF amplifier, DC..7GHz, 14.2dB (50Ω)	SOT-89	20aa	A1	4b	Mc
29	-	UTC8129	Vdet-IC	3.9V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
290	-	XC6202PF12PR	LVR-IC	LDO, 15.1V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
2907A	-	WTM2907A	Si-pnp	GP, 60V, 600mA, 1.2W, B=100..300, >200MHz	SOT-89	20tb	-	4b	Wtr
291	-	XC6202PF22PR	LVR-IC	LDO, 15.2V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
292	-	XC6202PF32PR	LVR-IC	LDO, 15.3V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
293	-	XC6202PF42PR	LVR-IC	LDO, 15.4V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
294	-	XC6202PF52PR	LVR-IC	LDO, 15.5V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
295	-	XC6202PF62PR	LVR-IC	LDO, 15.6V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
296	-	XC6202PF72PR	LVR-IC	LDO, 15.7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
297	-	XC6202PF82PR	LVR-IC	LDO, 15.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
298	-	XC6202PF92PR	LVR-IC	LDO, 15.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
2982A	-	KSC2982-A	Si-npn	AF-Drv, 30V, 2A, 500mW, B=140..240, >150MHz	SOT-89	20tb	-	4n	F
2982B	-	KSC2982-B	Si-npn	AF-Drv, 30V, 2A, 500mW, B=200..330, >150MHz	SOT-89	20tb	-	4n	F
2982C	-	KSC2982-C	Si-npn	AF-Drv, 30V, 2A, 500mW, B=300..450, >150MHz	SOT-89	20tb	-	4n	F
2982D	-	KSC2982-D	Si-npn	AF-Drv, 30V, 2A, 500mW, B=420..600, >150MHz	SOT-89	20tb	-	4n	F
299	-	XC6202PG02PR	LVR-IC	LDO, 16V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29A	-	AAT60029A-S16	Vdet-IC	2.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
29A	-	XC6202PG12PR	LVR-IC	LDO, 16.1V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29B	-	AAT60029B-S16	Vdet-IC	2.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
29B	-	XC6202PG22PR	LVR-IC	LDO, 16.2V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29C	-	AAT60029C-S16	Vdet-IC	2.9V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
29C	-	XC6202PG32PR	LVR-IC	LDO, 16.3V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29D	-	AAT60029D-S16	Vdet-IC	2.9V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
29D	-	XC6202PG42PR	LVR-IC	LDO, 16.4V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29E	-	XC6202PG52PR	LVR-IC	LDO, 16.5V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29F	-	XC6202PG62PR	LVR-IC	LDO, 16.6V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29H	-	XC6202PG72PR	LVR-IC	LDO, 16.7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29K	-	XC6202PG82PR	LVR-IC	LDO, 16.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29L	-	XC6202PG92PR	LVR-IC	LDO, 16.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29M	-	XC6202PH02PR	LVR-IC	LDO, 17V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29N	-	XC6202PH12PR	LVR-IC	LDO, 17.1V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29P	-	XC6202PH22PR	LVR-IC	LDO, 17.2V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29R	-	XC6202PH32PR	LVR-IC	LDO, 17.3V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29S	-	XC6202PH42PR	LVR-IC	LDO, 17.4V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29T	-	XC6202PH52PR	LVR-IC	LDO, 17.5V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29U	-	XC6202PH62PR	LVR-IC	LDO, 17.6V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29V	-	XC6202PH72PR	LVR-IC	LDO, 17.7V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29X	-	CHTA29XPT	Si-npn-Darl	AF, Sw, 40V, 500mA, B>20000, 220MHz	SOT-89	20tb	-	4b	Chm
29X	-	XC6202PH82PR	LVR-IC	LDO, 17.8V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29Y	-	XC6202PH92PR	LVR-IC	LDO, 17.9V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
29Z	-	XC6202PJ02PR	LVR-IC	LDO, 18V±2%, 150mA	SOT-89	20ch	VR1	4c	Tor
2A	-	2T665A9	Si-npn	GP, 120V, 1A, 300mW, B=40..250, 200MHz	SOT-89	20tb	-	4g	Rus
2A	-	KIA7219F	Vdet-IC	1.9V±2%, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
2A	-	PXT3906	Si-pnp	Sw, 40V, 100mA, 1.2W, B=100..300, >250MHz	SOT-89	20tb	-	4a	Kex
2A	-	SXT3906	Si-pnp	Sw, 40V, 200mA, 1W, B=100..300, >250MHz	SOT-89	20tb	-	4b	Sie
2A0	-	TC55RP202EMB	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
2A0	-	XC62FP2002P	LVR-IC	2.0V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
2A5	jc	AP1722A-12GI	LVR-IC	LDO, 1.2V±2%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2A5	jc	AP1722A-12PI	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20ch	VR1	4pa	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2A5	je	AP1722A-12GL1	LVR-IC	LDO, 1.2V±1%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2A5	je	AP1722A-12PL1	LVR-IC	LDO, 1.2V±1%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2A5	jf	AP1722A-12GL	LVR-IC	LDO, 1.2V±2%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2A5	jf	AP1722A-12PL	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2A5	jp	AP1722A-12Gl1	LVR-IC	LDO, 1.2V±1%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2A5	jp	AP1722A-12Pl1	LVR-IC	LDO, 1.2V±1%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2A8	jc	AP1722A-15Gl	LVR-IC	LDO, 1.5V±2%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2A8	jc	AP1722A-15Pl	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2A8	je	AP1722A-15GL1	LVR-IC	LDO, 1.5V±1%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2A8	je	AP1722A-15PL1	LVR-IC	LDO, 1.5V±1%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2A8	jf	AP1722A-15GL	LVR-IC	LDO, 1.5V±2%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2A8	jf	AP1722A-15PL	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2A8	jp	AP1722A-15Gl1	LVR-IC	LDO, 1.5V±1%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2A8	jp	AP1722A-15Pl1	LVR-IC	LDO, 1.5V±1%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AA	jc	AP1722A-18Gl	LVR-IC	LDO, 1.8V±2%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AA	jc	AP1722A-18Pl	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AA	je	AP1722A-18GL1	LVR-IC	LDO, 1.8V±1%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AA	je	AP1722A-18PL1	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AA	jf	AP1722A-18GL	LVR-IC	LDO, 1.8V±2%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AA	jf	AP1722A-18PL	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AA	jp	AP1722A-18Gl1	LVR-IC	LDO, 1.8V±1%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AA	jp	AP1722A-18Pl1	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AD	jc	AP1722A-20Gl	LVR-IC	LDO, 2.0V±2%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AD	jc	AP1722A-20Pl	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AD	je	AP1722A-20GL1	LVR-IC	LDO, 2.0V±1%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AD	je	AP1722A-20PL1	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AD	jf	AP1722A-20GL	LVR-IC	LDO, 2.0V±2%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AD	jf	AP1722A-20PL	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AD	jp	AP1722A-20Gl1	LVR-IC	LDO, 2.0V±1%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AD	jp	AP1722A-20Pl1	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AG	jc	AP1722A-25Gl	LVR-IC	LDO, 2.5V±2%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AG	jc	AP1722A-25Pl	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AG	je	AP1722A-25GL1	LVR-IC	LDO, 2.5V±1%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AG	je	AP1722A-25PL1	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AG	jf	AP1722A-25GL	LVR-IC	LDO, 2.5V±2%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AG	jf	AP1722A-25PL	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AG	jp	AP1722A-25Gl1	LVR-IC	LDO, 2.5V±1%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AG	jp	AP1722A-25Pl1	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AJ	jc	AP1722A-27Gl	LVR-IC	LDO, 2.7V±2%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AJ	jc	AP1722A-27Pl	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AJ	je	AP1722A-27GL1	LVR-IC	LDO, 2.7V±1%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AJ	je	AP1722A-27PL1	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AJ	jf	AP1722A-27GL	LVR-IC	LDO, 2.7V±2%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AJ	jf	AP1722A-27PL	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AJ	jp	AP1722A-27Gl1	LVR-IC	LDO, 2.7V±1%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AJ	jp	AP1722A-27Pl1	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AK	jc	AP1722A-28Gl	LVR-IC	LDO, 2.8V±2%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AK	jc	AP1722A-28Pl	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AK	je	AP1722A-28GL1	LVR-IC	LDO, 2.8V±1%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AK	je	AP1722A-28PL1	LVR-IC	LDO, 2.8V±1%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AK	jf	AP1722A-28GL	LVR-IC	LDO, 2.8V±2%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AK	jf	AP1722A-28PL	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AK	jp	AP1722A-28Gl1	LVR-IC	LDO, 2.8V±1%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AK	jp	AP1722A-28Pl1	LVR-IC	LDO, 2.8V±1%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AL	jc	AP1722A-LLGl	LVR-IC	LDO, 2.85V±2%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AL	jc	AP1722A-LLPl	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AL	je	AP1722A-LLGL1	LVR-IC	LDO, 2.85V±1%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AL	je	AP1722A-LLPL1	LVR-IC	LDO, 2.85V±1%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AL	jf	AP1722A-LLGL	LVR-IC	LDO, 2.85V±2%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AL	jf	AP1722A-LLPL	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AL	jp	AP1722A-LLGl1	LVR-IC	LDO, 2.85V±1%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AL	jp	AP1722A-LLPl1	LVR-IC	LDO, 2.85V±1%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AM	jc	AP1722A-30Gl	LVR-IC	LDO, 3.0V±2%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AM	jc	AP1722A-30Pl	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AM	je	AP1722A-30GL1	LVR-IC	LDO, 3.0V±1%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AM	je	AP1722A-30PL1	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AM	jf	AP1722A-30GL	LVR-IC	LDO, 3.0V±2%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AM	jf	AP1722A-30PL	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AM	jp	AP1722A-30Gl1	LVR-IC	LDO, 3.0V±1%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AM	jp	AP1722A-30Pl1	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-89	20ch	VR1	4pa	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2AQ	jc	AP1722A-33GI	LVR-IC	LDO, 3.3V±2%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AQ	jc	AP1722A-33PI	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AQ	je	AP1722A-33GL1	LVR-IC	LDO, 3.3V±1%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AQ	je	AP1722A-33PL1	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AQ	jf	AP1722A-33GL	LVR-IC	LDO, 3.3V±2%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AQ	jf	AP1722A-33PL	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AQ	jp	AP1722A-33GI1	LVR-IC	LDO, 3.3V±1%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AQ	jp	AP1722A-33PI1	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AR	-	2SC5026-R	Si-npn	AF-Drv, 80V, 1A, 1W, B=120..240, 120MHz	SOT-89	20tb	-	4b	Pan
2AS	-	2SC5026-S	Si-npn	AF-Drv, 80V, 1A, 1W, B=270..340, 120MHz	SOT-89	20tb	-	4b	Pan
2AV	jc	AP1722A-35GI	LVR-IC	LDO, 3.5V±2%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AV	jc	AP1722A-35PI	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2AV	je	AP1722A-35GL1	LVR-IC	LDO, 3.5V±1%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AV	je	AP1722A-35PL1	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AV	jf	AP1722A-35GL	LVR-IC	LDO, 3.5V±2%, 300mA, Halogen-free	SOT-89	20vl	VR1	4pb	Anw
2AV	jf	AP1722A-35PL	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4pa	Anw
2AV	jp	AP1722A-35GI1	LVR-IC	LDO, 3.5V±1%, 300mA, Halogen-free	SOT-89	20ch	VR1	4pb	Anw
2AV	jp	AP1722A-35PI1	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-89	20ch	VR1	4pa	Anw
2B	-	KIA7221F	Vdet-IC	2.1V±2%, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
2B	-	RH5RL22AA	LVR-IC	2.2V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
2B0	-	TC55RP212EMB	LVR-IC	LDO, 2.1V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
2B0	-	XC62FP2102P	LVR-IC	2.1V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
2B5	-	XC62KN212P	LVR-IC	LDO, -2.1V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
2C	-	KIA7223F	Vdet-IC	2.3V±2%, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
2C	-	RH5RL32AA	LVR-IC	3.2V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
2C0	-	TC55RP222EMB	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
2C0	-	XC62FP2202P	LVR-IC	2.2V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
2C5	-	XC62KN222P	LVR-IC	LDO, -2.2V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
2D	-	KIA7225F	Vdet-IC	2.5V±2%, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
2D	-	RH5RL42AA	LVR-IC	4.2V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
2D	-	SXTA92	Si-pnp	Vid, 300V, 500mA, 1W, B>25, >50MHz	SOT-89	20tb	-	4b	Sie
2D0	-	TC55RP232EMB	LVR-IC	LDO, 2.3V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
2D0	-	XC62FP2302P	LVR-IC	2.3V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
2D5	-	XC62KN232P	LVR-IC	LDO, -2.3V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
2E	-	KIA7227F	Vdet-IC	2.7V±2%, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
2E	-	RH5RL52AA	LVR-IC	5.2V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
2E	-	SXTA93	Si-pnp	Vid, 200V, 500mA, 1W, B>25, >50MHz	SOT-89	20tb	-	4b	Sie
2E0	-	TC55RP242EMB	LVR-IC	LDO, 2.4V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
2E0	-	XC62FP2402P	LVR-IC	2.4V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
2E5	-	XC62KN242P	LVR-IC	LDO, -2.4V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
2Eb	-	FT510Eb	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-89	20vl	VR1	4k	Fmd
2Ec	-	FT510Ec	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-89	20ch	VR1	4k	Fmd
2ER	-	2SD2459-R	Si-npn	AF, 150V, 1A, 1W, B=140..240, 90MHz	SOT-89	20tb	-	4b	Pan
2ES	-	2SD2459-S	Si-npn	AF, 150V, 1A, 1W, B=170..340, 90MHz	SOT-89	20tb	-	4b	Pan
2F	-	2SB1612	Si-pnp	AF, Lo-sat, 10V, 2A, 1W, B=200..800, 60MHz	SOT-89	20tb	-	4b	Pan
2F	-	KIA7229F	Vdet-IC	2.9V±2%, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
2F	-	SXT2907A	Si-pnp	GP, 60V, 600mA, 1W, B=100..300, >200MHz	SOT-89	20tb	-	4b	Sie
2F0	-	TC55RP252EMB	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
2F0	-	XC62FP2502P	LVR-IC	2.5V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
2F5	-	XC62KN252P	LVR-IC	LDO, -2.5V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
2Fb	-	FT510Fb	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20vl	VR1	4k	Fmd
2Fc	-	FT510Fc	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20ch	VR1	4k	Fmd
2G	-	KIA7231F	Vdet-IC	3.1V±2%, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
2Gb	-	FT510Gb	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20vl	VR1	4k	Fmd
2Gc	-	FT510Gc	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20ch	VR1	4k	Fmd
2H	-	KIA7232F	Vdet-IC	3.2V±2%, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
2H0	-	TC55RP262EMB	LVR-IC	LDO, 2.6V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
2H0	-	XC62FP2602P	LVR-IC	2.6V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
2H5	-	XC62KN262P	LVR-IC	LDO, -2.6V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
2Hb	-	FT510Hb	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-89	20vl	VR1	4k	Fmd
2Hc	-	FT510Hc	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-89	20ch	VR1	4k	Fmd
2I	-	2SD2474	Si-npn	AF, Lo-sat, 10V, 2A, 1W, B=200..800, 180MHz	SOT-89	20tb	-	4b	Pan
2J	-	KIA7233F	Vdet-IC	3.3V±2%, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
2J	-	RH5RE22AA	LVR-IC	Ultra-LDO, 2.2V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
2K	-	2SB1614	Si-pnp	AF, 20V, 2A, 1W, B=200..800, 60MHz	SOT-89	20tb	-	4b	Pan
2K	-	KIA7234F	Vdet-IC	3.4V±2%, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
2K	-	RH5RE32AA	LVR-IC	Ultra-LDO, 3.2V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
2K0	-	TC55RP272EMB	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
2K0	-	XC62FP2702P	LVR-IC	2.7V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
2K5	-	XC62KN272P	LVR-IC	LDO, -2.7V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2KP	-	2SB1678-P	Si-pnp	AF-Drv, 10V, 3A, 1W, B=90..135, 120MHz	SOT-89	20tb	-	4b	Pan
2KQ	-	2SB1678-Q	Si-pnp	AF-Drv, 10V, 3A, 1W, B=120..205, 120MHz	SOT-89	20tb	-	4b	Pan
2KR	-	2SB1678-R	Si-pnp	AF-Drv, 10V, 3A, 1W, B=180..625, 120MHz	SOT-89	20tb	-	4b	Pan
2L	-	KIA7235F	Vdet-IC	3.5V±2%, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
2L	-	RH5RE42AA	LVR-IC	Ultra-LDO, 4.2V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
2L	-	TFM1514	Si-pnp	HV, 150V, 500mA, 600mW, B=100..390, 100MHz	SOT-89	20tb	-	4g	Tfr
2L0	-	TC55RP282EMB	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
2L0	-	XC62FP2802P	LVR-IC	2.8V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
2L5	-	XC62KN282P	LVR-IC	LDO, -2.8V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
2LQ	-	TFM1514Q	Si-pnp	HV, 150V, 500mA, 600mW, B=120..270, 100MHz	SOT-89	20tb	-	4g	Tfr
2LR	-	TFM1514R	Si-pnp	HV, 150V, 500mA, 600mW, B=180..390, 100MHz	SOT-89	20tb	-	4g	Tfr
2M	-	2SK2211	n-MOSFET	V-MOS, LogL, 30V, ±1A, <0.6Ω(0.5A), 12/220ns, int, Rgate	SOT-89	20fa	-	4b	Pan
2M	-	KIA7236F	Vdet-IC	3.6V±2%, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
2M	-	RH5RE52AA	LVR-IC	Ultra-LDO, 5.2V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
2M0	-	TC55RP292EMB	LVR-IC	LDO, 2.9V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
2M0	-	XC62FP2902P	LVR-IC	2.9V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
2M5	-	XC62KN292P	LVR-IC	LDO, -2.9V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
2N	-	KIA7239F	Vdet-IC	3.9V±2%, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
2P	-	KIA7242F	Vdet-IC	4.2V±2%, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
2P	-	SXT2222A	Si-npn	GP, 40V, 600mA, 1W, B=100..300, >300MHz	SOT-89	20tb	-	4b	Sie
2R	-	KIA7245F	Vdet-IC	4.5V±2%, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
2X	-	PXT4401	Si-npn	Sw, 60V, 600mA, 1.3W, B=20..30, >250MHz	SOT-89	20tb	-	4a	Kex
2Y4	-	BZV49-C2V4	Z-diode	2.4V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
2Y7	-	BZV49-C2V7	Z-diode	2.7V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
2Б	-	2T665Б9	Si-npn	GP, 100V, 1A, 300mW, B=40..250, 200MHz	SOT-89	20tb	-	4g	Rus
30	-	ELM9730NAB	Vdet-IC	3.0V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
30	-	UTC8130	Vdet-IC	3.0V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
301	-	MC33463H-30K	DC-DC-IC	PFM, 3V±2.5%, 80..120kHz	SOT-89	20bq	DC2	4b	Ons
302B	-	MC33466H-30	DC-DC-IC	PWM, 3V±2.5%, 100kHz	SOT-89	20br	DC5	4b	Ons
3055	-	CHM3055LXPT	n-MOSFET	GP, 60V, 3.7A, 3W, Rds<0.12Ω(3.7A), 15/40ns	SOT-89	20fh	-	4d	Chm
30A	-	AAT60030A-S16	Vdet-IC	3.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
30B	-	AAT60030B-S16	Vdet-IC	3.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
30C	-	AAT60030C-S16	Vdet-IC	3.0V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
30D	-	AAT60030D-S16	Vdet-IC	3.0V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
30Y	-	BZV49-C30	Z-diode	30V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Phi
31	-	ELM9731NAB	Vdet-IC	3.1V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
31	-	UTC8131	Vdet-IC	3.1V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
31A	-	AAT60031A-S16	Vdet-IC	3.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
31B	-	AAT60031B-S16	Vdet-IC	3.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
31C	-	AAT60031C-S16	Vdet-IC	3.1V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
31D	-	AAT60031D-S16	Vdet-IC	3.1V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
32	-	ELM9732NAB	Vdet-IC	3.2V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
32	-	UTC8132	Vdet-IC	3.2V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
32A	-	AAT60032A-S16	Vdet-IC	3.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
32B	-	AAT60032B-S16	Vdet-IC	3.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
32C	-	AAT60032C-S16	Vdet-IC	3.2V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
32D	-	AAT60032D-S16	Vdet-IC	3.2V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
32K	-	XC6203E182PR	LVR-IC	1.8V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
32L	-	XC6203E192PR	LVR-IC	1.9V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
32M	-	XC6203E202PR	LVR-IC	2V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
32N	-	XC6203E212PR	LVR-IC	2.1V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
32P	-	XC6203E222PR	LVR-IC	2.2V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
32R	-	XC6203E232PR	LVR-IC	2.3V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
32S	-	XC6203E242PR	LVR-IC	2.4V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
32T	-	XC6203E252PR	LVR-IC	2.5V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
32V	-	XC6203E272PR	LVR-IC	2.7V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
32X	-	XC6203E282PR	LVR-IC	2.8V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
32Y	-	XC6203E292PR	LVR-IC	2.9V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
32Z	-	XC6203E302PR	LVR-IC	3V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33	-	ELM9733NAB	Vdet-IC	3.3V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
33	-	Gali-33	MMIC	RF amplifier, DC..4GHz, 15.8dB (50Ω)	SOT-89	20aa	A1	4b	Mc
33	-	UTC8133	Vdet-IC	3.3V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
330	-	XC6203E312PR	LVR-IC	3.1V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
331	-	XC6203E322PR	LVR-IC	3.2V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
332	-	XC6203E332PR	LVR-IC	3.3V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
333	-	XC6203E342PR	LVR-IC	3.4V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
334	-	XC6203E352PR	LVR-IC	3.5V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
335	-	XC6203E362PR	LVR-IC	3.6V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
336	-	XC6203E372PR	LVR-IC	3.7V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
337	-	XC6203E382PR	LVR-IC	3.8V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
338	-	XC6203E392PR	LVR-IC	3.9V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
339	-	XC6203E402PR	LVR-IC	4V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33A	-	AAT60033A-S16	Vdet-IC	3.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
33A	-	XC6203E412PR	LVR-IC	4.1V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33B	-	AAT60033B-S16	Vdet-IC	3.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
33B	-	XC6203E422PR	LVR-IC	4.2V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33C	-	AAT60033C-S16	Vdet-IC	3.3V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
33C	-	XC6203E432PR	LVR-IC	4.3V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33D	-	AAT60033D-S16	Vdet-IC	3.3V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
33D	-	XC6203E442PR	LVR-IC	4.4V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33E	-	XC6203E452PR	LVR-IC	4.5V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33F	-	XC6203E462PR	LVR-IC	4.6V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33H	-	XC6203E472PR	LVR-IC	4.7V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33K	-	XC6203E482PR	LVR-IC	4.8V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33L	-	XC6203E492PR	LVR-IC	4.9V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33M	-	XC6203E502PR	LVR-IC	5V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33N	-	XC6203E512PR	LVR-IC	5.1V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33P	-	XC6203E522PR	LVR-IC	5.2V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33R	-	XC6203E532PR	LVR-IC	5.3V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33S	-	XC6203E542PR	LVR-IC	5.4V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33T	-	XC6203E552PR	LVR-IC	5.5V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33U	-	XC6203E562PR	LVR-IC	5.6V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33V	-	XC6203E572PR	LVR-IC	5.7V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33X	-	XC6203E582PR	LVR-IC	5.8V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33Y	-	BZV49-C33	Z-diode	33V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Phi
33Y	-	XC6203E592PR	LVR-IC	5.9V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
33Z	-	XC6203E602PR	LVR-IC	6V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
34	-	ELM9734NAB	Vdet-IC	3.4V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
34	-	UTC8134	Vdet-IC	3.4V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
349B	-	AAT60039B-S16	Vdet-IC	3.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
34A	-	AAT60034A-S16	Vdet-IC	3.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
34B	-	AAT60034B-S16	Vdet-IC	3.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
34C	-	AAT60034C-S16	Vdet-IC	3.4V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
34D	-	AAT60034D-S16	Vdet-IC	3.4V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
34X	-	XC6203E28APR	LVR-IC	2.85V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
35	-	ELM9735NAB	Vdet-IC	3.5V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
35	-	UTC8135	Vdet-IC	3.5V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
351	-	MC33463H-35K	DC-DC-IC	PFM, 3.5V±2.5%, 80..120kHz	SOT-89	20bq	DC2	4b	Ons
351A	-	MC33466H-35J	DC-DC-IC	PWM, 3.5V±2.5%, 50kHz	SOT-89	20bq	DC2	4b	Ons
351A	-	SD42351NA	LDR-IC	White LED driver 3..6V, 335mA	SOT-89	20ch	LD4	4g	Sln
351B	-	SD42351NB	LDR-IC	White LED driver 3..6V, 305mA	SOT-89	20ch	LD4	4g	Sln
351C	-	SD42351NC	LDR-IC	White LED driver 3..6V, 270mA	SOT-89	20ch	LD4	4g	Sln
351D	-	SD42351ND	LDR-IC	White LED driver 3..6V, 245mA	SOT-89	20ch	LD4	4g	Sln
351E	-	SD42351NE	LDR-IC	White LED driver 3..6V, 215mA	SOT-89	20ch	LD4	4g	Sln
351G	-	SD42351NG	LDR-IC	White LED driver 3..6V, 170mA	SOT-89	20ch	LD4	4g	Sln
351H	-	SD42351NH	LDR-IC	White LED driver 3..6V, 150mA	SOT-89	20ch	LD4	4g	Sln
351L	-	SD42351NL	LDR-IC	White LED driver 3..6V, 110mA	SOT-89	20ch	LD4	4g	Sln
352B	-	MC33466H-35	DC-DC-IC	PWM, 3.5V±2.5%, 100kHz	SOT-89	20br	DC5	4b	Ons
35A	-	AAT60035A-S16	Vdet-IC	3.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
35B	-	AAT60035B-S16	Vdet-IC	3.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
35C	-	AAT60035C-S16	Vdet-IC	3.5V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
35D	-	AAT60035D-S16	Vdet-IC	3.5V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
35K	-	XC6203P182PR	LVR-IC	1.8V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
35L	-	XC6203P192PR	LVR-IC	1.9V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
35M	-	XC6203P202PR	LVR-IC	2V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
35N	-	XC6203P212PR	LVR-IC	2.1V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
35P	-	XC6203P222PR	LVR-IC	2.2V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
35R	-	XC6203P232PR	LVR-IC	2.3V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
35S	-	XC6203P242PR	LVR-IC	2.4V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
35T	-	XC6203P252PR	LVR-IC	2.5V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
35U	-	XC6203P262PR	LVR-IC	2.6V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
35V	-	XC6203P272PR	LVR-IC	2.7V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
35X	-	XC6203P282PR	LVR-IC	2.8V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
35Y	-	XC6203P292PR	LVR-IC	2.9V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
35Z	-	XC6203P302PR	LVR-IC	3V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36	-	ELM9736NAB	Vdet-IC	3.6V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
36	-	UTC8136	Vdet-IC	3.6V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
360	-	XC6203P312PR	LVR-IC	3.1V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
361	-	XC6203P322PR	LVR-IC	3.2V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
362	-	XC6203P332PR	LVR-IC	3.3V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
363	-	XC6203P342PR	LVR-IC	3.4V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
364	-	XC6203P352PR	LVR-IC	3.5V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
365	-	XC6203P362PR	LVR-IC	3.6V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
366	-	XC6203P372PR	LVR-IC	3.7V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
367	-	XC6203P382PR	LVR-IC	3.8V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
368	-	XC6203P392PR	LVR-IC	3.9V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
369	-	XC6203P402PR	LVR-IC	4V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36A	-	AAT60036A-S16	Vdet-IC	3.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
36A	-	XC6203P412PR	LVR-IC	4.1V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36B	-	AAT60036B-S16	Vdet-IC	3.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
36B	-	XC6203P422PR	LVR-IC	4.2V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36C	-	AAT60036C-S16	Vdet-IC	3.6V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
36C	-	XC6203P432PR	LVR-IC	4.3V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36D	-	AAT60036D-S16	Vdet-IC	3.6V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
36D	-	XC6203P442PR	LVR-IC	4.4V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36E	-	XC6203P452PR	LVR-IC	4.5V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36F	-	XC6203P462PR	LVR-IC	4.6V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36H	-	XC6203P472PR	LVR-IC	4.7V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36K	-	XC6203P482PR	LVR-IC	4.8V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36L	-	XC6203P492PR	LVR-IC	4.9V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36M	-	XC6203P502PR	LVR-IC	5V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36N	-	XC6203P512PR	LVR-IC	5.1V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36P	-	XC6203P522PR	LVR-IC	5.2V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36R	-	XC6203P532PR	LVR-IC	5.3V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36S	-	XC6203P542PR	LVR-IC	5.4V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36T	-	XC6203P552PR	LVR-IC	5.5V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36U	-	XC6203P562PR	LVR-IC	5.6V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36V	-	XC6203P572PR	LVR-IC	5.7V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36X	-	XC6203P582PR	LVR-IC	5.8V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36Y	-	BZV49-C36	Z-diode	36V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Phi
36Y	-	XC6203P592PR	LVR-IC	5.9V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
36Z	-	XC6203P602PR	LVR-IC	6V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
37	-	ELM9737NAB	Vdet-IC	3.7V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
37	-	UTC8137	Vdet-IC	3.7V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
37A	-	AAT60037A-S16	Vdet-IC	3.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
37B	-	AAT60037B-S16	Vdet-IC	3.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
37C	-	AAT60037C-S16	Vdet-IC	3.7V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
37D	-	AAT60037D-S16	Vdet-IC	3.7V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
37X	-	XC6203P28APR	LVR-IC	2.85V±2%, 400mA, Internal current limiter	SOT-89	20vl	VR1	4c	Tor
38	-	ELM9738NAB	Vdet-IC	3.8V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
38	-	UTC8138	Vdet-IC	3.8V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
38A	-	AAT60038A-S16	Vdet-IC	3.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
38B	-	AAT60038B-S16	Vdet-IC	3.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
38C	-	AAT60038C-S16	Vdet-IC	3.8V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
38D	-	AAT60038D-S16	Vdet-IC	3.8V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
39	-	ELM9739NAB	Vdet-IC	3.9V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
39	-	Gali-39	MMIC	RF amplifier, DC..7GHz, 17.6dB (50Ω)	SOT-89	20aa	A1	4b	Mc
39	-	UTC8139	Vdet-IC	3.9V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
39A	-	AAT60039A-S16	Vdet-IC	3.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
39C	-	AAT60039C-S16	Vdet-IC	3.9V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
39D	-	AAT60039D-S16	Vdet-IC	3.9V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
39U	-	XC6203E262PR	LVR-IC	2.6V±2%, 400mA	SOT-89	20vl	VR1	4c	Tor
39Y	-	BZV49-C39	Z-diode	39V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Phi
3A	-	2SB1699	Si-pnp	AF-Drv, 60V, 2A, 1W, B=80..250, 180MHz	SOT-89	20tb	-	4b	Pan
3A	-	BGA6289	MMIC	RF amp, DC..1.95GHz, 13dB (50Ω), Vcc=4.1V	SOT-89	20aa	A1	4g	Nxp
3A	-	LM431K	Vref-IC	Adjust, Precision, Shunt, 2.44..2.55V±2.2%	SOT-89	20rb	RF2	4g	Ttr
3A0	-	TC55RP302EMB	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
3A0	-	XC62FP3002P	LVR-IC	3.0V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
3A5	-	XC62KN302P	LVR-IC	LDO, -3.0V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
3Ab	-	FT511Ab	LVR-IC	LDO, 1.2V±2%, 400mA	SOT-89	20vl	VR1	4k	Fmd
3Ac	-	FT511Ac	LVR-IC	LDO, 1.2V±2%, 400mA	SOT-89	20ch	VR1	4k	Fmd
3B	-	RH5RL23AA	LVR-IC	2.3V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
3B0	-	TC55RP312EMB	LVR-IC	LDO, 3.1V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
3B0	-	XC62FP3102P	LVR-IC	3.1V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
3B5	-	XC62KN312P	LVR-IC	LDO, -3.1V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
3Bb	-	FT511Bb	LVR-IC	LDO, 1.5V±2%, 400mA	SOT-89	20vl	VR1	4k	Fmd
3Bc	-	FT511Bc	LVR-IC	LDO, 1.5V±2%, 400mA	SOT-89	20ch	VR1	4k	Fmd
3C	-	MC78LC33HT1	LVR-IC	Low Iq, 3.3V±2.5%, 80mA	SOT-89	20vl	VR1	4b	Ons
3C	-	RH5RL33AA	LVR-IC	3.3V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
3C0	-	TC55RP322EMB	LVR-IC	LDO, 3.2V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3C0	-	XC62FP3202P	LVR-IC	3.2V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
3C5	-	XC62KN322P	LVR-IC	LDO, -3.2V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
3Cb	-	FT511Cb	LVR-IC	LDO, 1.8V±2%, 400mA	SOT-89	20vl	VR1	4k	Fmd
3Cc	-	FT511Cc	LVR-IC	LDO, 1.8V±2%, 400mA	SOT-89	20ch	VR1	4k	Fmd
3D	-	RH5RL43AA	LVR-IC	4.3V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
3D	-	TFM4505	Si-npn	Vid, 400V, 300mA, 600mW, B=82..270, 20MHz	SOT-89	20tb	-	4g	Tfr
3D0	-	TC55RP332EMB	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
3D0	-	XC62FP3302P	LVR-IC	3.3V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
3D5	-	XC62KN332P	LVR-IC	LDO, -3.3V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
3Db	-	FT511Db	LVR-IC	LDO, 2.5V±2%, 400mA	SOT-89	20vl	VR1	4k	Fmd
3Dc	-	FT511Dc	LVR-IC	LDO, 2.5V±2%, 400mA	SOT-89	20ch	VR1	4k	Fmd
3E	-	RH5RL53AA	LVR-IC	5.3V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
3E0	-	TC55RP342EMB	LVR-IC	LDO, 3.4V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
3E0	-	XC62FP3402P	LVR-IC	3.4V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
3E5	-	XC62KN342P	LVR-IC	LDO, -3.4V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
3F0	-	TC55RP352EMB	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
3F0	-	XC62FP3502P	LVR-IC	3.5V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
3F5	-	XC62KN352P	LVR-IC	LDO, -3.5V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
3H0	-	TC55RP362EMB	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
3H0	-	XC62FP3602P	LVR-IC	3.6V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
3H5	-	XC62KN362P	LVR-IC	LDO, -3.6V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
3J	-	RH5RE23AA	LVR-IC	Ultra-LDO, 2.3V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
3K	-	RH5RE33AA	LVR-IC	Ultra-LDO, 3.3V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
3K0	-	TC55RP372EMB	LVR-IC	LDO, 3.7V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
3K0	-	XC62FP3702P	LVR-IC	3.7V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
3K5	-	XC62KN372P	LVR-IC	LDO, -3.7V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
3L	-	RH5RE43AA	LVR-IC	Ultra-LDO, 4.3V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
3L0	-	TC55RP382EMB	LVR-IC	LDO, 3.8V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
3L0	-	XC62FP3802P	LVR-IC	3.8V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
3L5	-	XC62KN382P	LVR-IC	LDO, -3.8V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
3M	-	RH5RE53AA	LVR-IC	Ultra-LDO, 5.3V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
3M0	-	TC55RP392EMB	LVR-IC	LDO, 3.9V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
3M0	-	XC62FP3902P	LVR-IC	3.9V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
3M5	-	XC62KN392P	LVR-IC	LDO, -3.9V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
3Y0	-	BZV49-C3V0	Z-diode	3V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
3Y3	-	BZV49-C3V3	Z-diode	3.3V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
3Y6	-	BZV49-C3V6	Z-diode	3.6V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
3Y9	-	BZV49-C3V9	Z-diode	3.9V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
40	-	ELM9740NAB	Vdet-IC	4.0V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
40	-	UTC8140	Vdet-IC	4.0V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
40A	-	AAT60040A-S16	Vdet-IC	4.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
40B	-	AAT60040B-S16	Vdet-IC	4.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
40C	-	AAT60040C-S16	Vdet-IC	4.0V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
40D	-	AAT60040D-S16	Vdet-IC	4.0V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
41	-	ELM9741NAB	Vdet-IC	4.1V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
41	-	UTC8141	Vdet-IC	4.1V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
41A	-	AAT60041A-S16	Vdet-IC	4.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
41B	-	AAT60041B-S16	Vdet-IC	4.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
41C	-	AAT60041C-S16	Vdet-IC	4.1V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
41D	-	AAT60041D-S16	Vdet-IC	4.1V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
42	-	ELM9742NAB	Vdet-IC	4.2V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
42	-	UTC8142	Vdet-IC	4.2V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
42A	-	AAT60042A-S16	Vdet-IC	4.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
42B	-	AAT60042B-S16	Vdet-IC	4.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
42C	-	AAT60042C-S16	Vdet-IC	4.2V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
42D	-	AAT60042D-S16	Vdet-IC	4.2V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
43	-	ELM9743NAB	Vdet-IC	4.3V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
43	-	UTC8143	Vdet-IC	4.3V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
43A	-	AAT60043A-S16	Vdet-IC	4.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
43B	-	AAT60043B-S16	Vdet-IC	4.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
43C	-	AAT60043C-S16	Vdet-IC	4.3V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
43D	-	AAT60043D-S16	Vdet-IC	4.3V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
43Y	-	BZV49-C43	Z-diode	43V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Phi
44	-	ELM9744NAB	Vdet-IC	4.4V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
44	-	UTC8144	Vdet-IC	4.4V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
44A	-	AAT60044A-S16	Vdet-IC	4.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
44B	-	AAT60044B-S16	Vdet-IC	4.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
44C	-	AAT60044C-S16	Vdet-IC	4.4V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
44D	-	AAT60044D-S16	Vdet-IC	4.4V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
45	-	ELM9745NAB	Vdet-IC	4.5V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
45	-	UTC8145	Vdet-IC	4.5V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
45A	-	AAT60045A-S16	Vdet-IC	4.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
45B	-	AAT60045B-S16	Vdet-IC	4.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
45C	-	AAT60045C-S16	Vdet-IC	4.5V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
45D	-	AAT60045D-S16	Vdet-IC	4.5V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
46	-	ELM9746NAB	Vdet-IC	4.6V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
46	-	UTC8146	Vdet-IC	4.6V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
4672	-	2DC4672	Si-npn	AF, Sw, 60V, 3A, 900mW, B=82..270, 180MHz	SOT-89	20tb	-	4m	Di
46A	-	AAT60046A-S16	Vdet-IC	4.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
46B	-	AAT60046B-S16	Vdet-IC	4.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
46C	-	AAT60046C-S16	Vdet-IC	4.6V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
46D	-	AAT60046D-S16	Vdet-IC	4.6V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
47	-	ELM9747NAB	Vdet-IC	4.7V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
47A	-	AAT60047A-S16	Vdet-IC	4.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
47B	-	AAT60047B-S16	Vdet-IC	4.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
47C	-	AAT60047C-S16	Vdet-IC	4.7V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
47D	-	AAT60047D-S16	Vdet-IC	4.7V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
47Y	-	BZV49-C47	Z-diode	47V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Phi
48	-	ELM9748NAB	Vdet-IC	4.8V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
48A	-	AAT60048A-S16	Vdet-IC	4.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
48B	-	AAT60048B-S16	Vdet-IC	4.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
48C	-	AAT60048C-S16	Vdet-IC	4.8V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
48D	-	AAT60048D-S16	Vdet-IC	4.8V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
49	-	ELM9749NAB	Vdet-IC	4.9V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
49	-	Gali-49	MMIC	RF amplifier, DC..5GHz, 10.7dB (50Ω)	SOT-89	20aa	A1	4b	Mc
49A	-	AAT60049A-S16	Vdet-IC	4.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
49B	-	AAT60049B-S16	Vdet-IC	4.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
49C	-	AAT60049C-S16	Vdet-IC	4.9V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
49D	-	AAT60049D-S16	Vdet-IC	4.9V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
4A	-	BGA6489	MMIC	RF amp, DC..1.95GHz, 16dB (50Ω), Vcc=5.1V	SOT-89	20aa	A1	4g	Nxp
4A	-	KIA7419F	Vdet-IC	1.9V, +Reset OCO	SOT-89	20vdd	VD6	4a	Kec
4A0	-	TC55RP402EMB	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
4A0	-	XC62FP4002P	LVR-IC	4.0V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
4A5	-	XC62KN402P	LVR-IC	LDO, -4.0V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
4AA	-	UM14225Y	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AA	jm	UM14225YB	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AB	-	UM14226Y	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AB	jm	UM14226YB	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AC	-	UM14227Y	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AC	jm	UM14227YB	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AD	-	UM14228Y	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AD	jm	UM14228YB	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AE	-	UM14229Y	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AE	jm	UM14229YB	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AF	-	UM14230Y	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AF	jm	UM14230YB	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AH	-	UM14231Y	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AH	jm	UM14231YB	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AJ	-	UM14234Y	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AJ	jm	UM14234YB	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AK	-	UM14235Y	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AK	jm	UM14235YB	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AL	-	UM14232Y	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AL	jm	UM14232YB	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AM	-	UM14233Y	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AM	jm	UM14233YB	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AN	-	UM14236Y	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AN	jm	UM14236YB	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AP	-	UM14237Y	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AP	jm	UM14237YB	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AQ	-	UM14238Y	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AQ	jm	UM14238YB	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AR	-	UM14239Y	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AR	jm	UM14239YB	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AS	-	UM14240Y	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AS	jm	UM14240YB	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AT	-	UM14241Y	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AT	jm	UM14241YB	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AU	-	UM14243Y	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AU	jm	UM14243YB	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4AY	-	UM14242Y	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AY	jm	UM14242YB	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4AZ	-	UM14244Y	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4AZ	jm	UM14244YB	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4B	-	KIA7421F	Vdet-IC	2.1V, +Reset OCO	SOT-89	20vdd	VD6	4a	Kec
4B	-	RH5RL24AA	LVR-IC	2.4V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
4B0	-	TC55RP412EMB	LVR-IC	LDO, 4.1V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
4B0	-	XC62FP4102P	LVR-IC	4.1V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
4B5	-	XC62KN412P	LVR-IC	LDO, -4.1V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
4BA	-	UM14245Y	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4BA	jm	UM14245YB	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4BB	-	UM14246Y	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4BB	jm	UM14246YB	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4BC	-	UM14247Y	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4BC	jm	UM14247YB	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4BD	-	UM14248Y	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4BD	jm	UM14248YB	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4BE	-	UM14249Y	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4BE	jm	UM14249YB	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4BF	-	UM14250Y	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-89	20vl	VR1	4x	Uns
4BF	jm	UM14250YB	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-89	20ch	VR1	4x	Uns
4C	-	KIA7423F	Vdet-IC	2.3V, +Reset OCO	SOT-89	20vdd	VD6	4a	Kec
4C	-	RH5RL34AA	LVR-IC	3.4V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
4C0	-	TC55RP422EMB	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
4C0	-	XC62FP4202P	LVR-IC	4.2V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
4C5	-	XC62KN422P	LVR-IC	LDO, -4.2V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
4D	-	KIA7425F	Vdet-IC	2.5V, +Reset OCO	SOT-89	20vdd	VD6	4a	Kec
4D	-	RH5RL44AA	LVR-IC	4.4V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
4D0	-	TC55RP432EMB	LVR-IC	LDO, 4.3V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
4D0	-	XC62FP4302P	LVR-IC	4.3V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
4D5	-	XC62KN432P	LVR-IC	LDO, -4.3V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
4E	-	KIA7427F	Vdet-IC	2.7V, +Reset OCO	SOT-89	20vdd	VD6	4a	Kec
4E	-	RH5RL54AA	LVR-IC	5.4V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
4E0	-	TC55RP442EMB	LVR-IC	LDO, 4.4V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
4E0	-	XC62FP4402P	LVR-IC	4.4V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
4E5	-	XC62KN442P	LVR-IC	LDO, -4.4V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
4F	-	KIA7429F	Vdet-IC	2.9V, +Reset OCO	SOT-89	20vdd	VD6	4a	Kec
4F0	-	TC55RP452EMB	LVR-IC	LDO, 4.5V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
4F0	-	XC62FP4502P	LVR-IC	4.5V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
4F5	-	XC62KN452P	LVR-IC	LDO, -4.5V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
4G	-	KIA7431F	Vdet-IC	3.1V, +Reset OCO	SOT-89	20vdd	VD6	4a	Kec
4H	-	KIA7432F	Vdet-IC	3.2V, +Reset OCO	SOT-89	20vdd	VD6	4a	Kec
4H0	-	TC55RP462EMB	LVR-IC	LDO, 4.6V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
4H0	-	XC62FP4602P	LVR-IC	4.6V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
4H5	-	XC62KN462P	LVR-IC	LDO, -4.6V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
4J	-	KIA7433F	Vdet-IC	3.3V, +Reset OCO	SOT-89	20vdd	VD6	4a	Kec
4J	-	RH5RE24AA	LVR-IC	Ultra-LDO, 2.4V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
4K	-	KIA7434F	Vdet-IC	3.4V, +Reset OCO	SOT-89	20vdd	VD6	4a	Kec
4K	-	RH5RE34AA	LVR-IC	Ultra-LDO, 3.4V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
4K0	-	TC55RP472EMB	LVR-IC	LDO, 4.7V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
4K0	-	XC62FP4702P	LVR-IC	4.7V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
4K5	-	XC62KN472P	LVR-IC	LDO, -4.7V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
4L	-	KIA7435F	Vdet-IC	3.5V, +Reset OCO	SOT-89	20vdd	VD6	4a	Kec
4L	-	RH5RE44AA	LVR-IC	Ultra-LDO, 4.4V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
4L0	-	TC55RP482EMB	LVR-IC	LDO, 4.8V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
4L0	-	XC62FP4802P	LVR-IC	4.8V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
4L5	-	XC62KN482P	LVR-IC	LDO, -4.8V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
4M	-	KIA7436F	Vdet-IC	3.6V, +Reset OCO	SOT-89	20vdd	VD6	4a	Kec
4M	-	RH5RE54AA	LVR-IC	Ultra-LDO, 5.4V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
4M0	-	TC55RP492EMB	LVR-IC	LDO, 4.9V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
4M0	-	XC62FP4902P	LVR-IC	4.9V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
4M5	-	XC62KN492P	LVR-IC	LDO, -4.9V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
4N	-	KIA7439F	Vdet-IC	3.9V, +Reset OCO	SOT-89	20vdd	VD6	4a	Kec
4P	-	KIA7442F	Vdet-IC	4.2V, +Reset OCO	SOT-89	20vdd	VD6	4a	Kec
4R	-	KIA7445F	Vdet-IC	4.5V, +Reset OCO	SOT-89	20vdd	VD6	4a	Kec
4Y3	-	BZV49-C4V3	Z-diode	4.3V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
4Y7	-	BZV49-C4V7	Z-diode	4.7V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
50	-	ELM9750NAB	Vdet-IC	5.0V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
50	-	UTC8150	Vdet-IC	5.0V±2%, -Reset OCO	SOT-89	20vdd	VD6	4b	Utc
501	-	MC33463H-50K	DC-DC-IC	PFM, 5V±2.5%, 80..120kHz	SOT-89	20bq	DC2	4b	Ons



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
501A	-	MC33466H-50J	DC-DC-IC	PWM, 5V±2.5%, 50kHz	SOT-89	20bq	DC2	4b	Ons
502B	-	MC33466H-50	DC-DC-IC	PWM, 5V±2.5%, 100kHz	SOT-89	20br	DC5	4b	Ons
50A	-	AAT60050A-S16	Vdet-IC	5.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
50B	-	AAT60050B-S16	Vdet-IC	5.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
50C	-	AAT60050C-S16	Vdet-IC	5.0V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
50D	-	AAT60050D-S16	Vdet-IC	5.0V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
51	-	ELM9751NAB	Vdet-IC	5.1V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
51	-	Gali-51	MMIC	RF amplifier, DC..4GHz, 13.4dB (50Ω)	SOT-89	20aa	A1	4b	Mc
5130Ax	-	G5130-25T21U	DC-DC-IC	PSM step-up, 2.5V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Bx	-	G5130-26T21U	DC-DC-IC	PSM step-up, 2.6V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Cx	-	G5130-27T21U	DC-DC-IC	PSM step-up, 2.7V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Dx	-	G5130-28T21U	DC-DC-IC	PSM step-up, 2.8V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Ex	-	G5130-29T21U	DC-DC-IC	PSM step-up, 2.9V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Fx	-	G5130-30T21U	DC-DC-IC	PSM step-up, 3.0V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Gx	-	G5130-31T21U	DC-DC-IC	PSM step-up, 3.1V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Hx	-	G5130-32T21U	DC-DC-IC	PSM step-up, 3.2V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Ix	-	G5130-33T21U	DC-DC-IC	PSM step-up, 3.3V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Jx	-	G5130-34T21U	DC-DC-IC	PSM step-up, 3.4V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Kx	-	G5130-35T21U	DC-DC-IC	PSM step-up, 3.5V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Lx	-	G5130-36T21U	DC-DC-IC	PSM step-up, 3.6V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Mx	-	G5130-37T21U	DC-DC-IC	PSM step-up, 3.7V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Nx	-	G5130-38T21U	DC-DC-IC	PSM step-up, 3.8V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Ox	-	G5130-39T21U	DC-DC-IC	PSM step-up, 3.9V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Px	-	G5130-40T21U	DC-DC-IC	PSM step-up, 4.0V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Qx	-	G5130-41T21U	DC-DC-IC	PSM step-up, 4.1V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Rx	-	G5130-42T21U	DC-DC-IC	PSM step-up, 4.2V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Sx	-	G5130-43T21U	DC-DC-IC	PSM step-up, 4.3V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Tx	-	G5130-44T21U	DC-DC-IC	PSM step-up, 4.4V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Ux	-	G5130-45T21U	DC-DC-IC	PSM step-up, 4.5V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Vx	-	G5130-46T21U	DC-DC-IC	PSM step-up, 4.6V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Wx	-	G5130-47T21U	DC-DC-IC	PSM step-up, 4.7V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Xx	-	G5130-48T21U	DC-DC-IC	PSM step-up, 4.8V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Yx	-	G5130-49T21U	DC-DC-IC	PSM step-up, 4.9V±2%	SOT-89	20bq	DC2	4p	Gmt
5130Zx	-	G5130-50T21U	DC-DC-IC	PSM step-up, 5.0V±2%	SOT-89	20bq	DC2	4p	Gmt
5131Ax	-	G5131-25T21U	DC-DC-IC	PSM step-up, 2.5V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Bx	-	G5131-26T21U	DC-DC-IC	PSM step-up, 2.6V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Cx	-	G5131-27T21U	DC-DC-IC	PSM step-up, 2.7V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Dx	-	G5131-28T21U	DC-DC-IC	PSM step-up, 2.8V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Ex	-	G5131-29T21U	DC-DC-IC	PSM step-up, 2.9V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Fx	-	G5131-30T21U	DC-DC-IC	PSM step-up, 3.0V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Gx	-	G5131-31T21U	DC-DC-IC	PSM step-up, 3.1V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Hx	-	G5131-32T21U	DC-DC-IC	PSM step-up, 3.2V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Ix	-	G5131-33T21U	DC-DC-IC	PSM step-up, 3.3V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Jx	-	G5131-34T21U	DC-DC-IC	PSM step-up, 3.4V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Kx	-	G5131-35T21U	DC-DC-IC	PSM step-up, 3.5V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Lx	-	G5131-36T21U	DC-DC-IC	PSM step-up, 3.6V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Mx	-	G5131-37T21U	DC-DC-IC	PSM step-up, 3.7V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Nx	-	G5131-38T21U	DC-DC-IC	PSM step-up, 3.8V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Ox	-	G5131-39T21U	DC-DC-IC	PSM step-up, 3.9V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Px	-	G5131-40T21U	DC-DC-IC	PSM step-up, 4.0V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Qx	-	G5131-41T21U	DC-DC-IC	PSM step-up, 4.1V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Rx	-	G5131-42T21U	DC-DC-IC	PSM step-up, 4.2V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Sx	-	G5131-43T21U	DC-DC-IC	PSM step-up, 4.3V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Tx	-	G5131-44T21U	DC-DC-IC	PSM step-up, 4.4V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Ux	-	G5131-45T21U	DC-DC-IC	PSM step-up, 4.5V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Vx	-	G5131-46T21U	DC-DC-IC	PSM step-up, 4.6V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Wx	-	G5131-47T21U	DC-DC-IC	PSM step-up, 4.7V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Xx	-	G5131-48T21U	DC-DC-IC	PSM step-up, 4.8V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Yx	-	G5131-49T21U	DC-DC-IC	PSM step-up, 4.9V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
5131Zx	-	G5131-50T21U	DC-DC-IC	PSM step-up, 5.0V±2%, ext, transistor	SOT-89	20br	DC5	4p	Gmt
515	jb	XC9111A151PR	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
516	jb	XC9111A161PR	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
517	jb	XC9111A171PR	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
518	jb	XC9111A181PR	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
519	jb	XC9111A191PR	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
51A	-	AAT60051A-S16	Vdet-IC	5.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
51B	-	AAT60051B-S16	Vdet-IC	5.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
51C	-	AAT60051C-S16	Vdet-IC	5.1V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
51D	-	AAT60051D-S16	Vdet-IC	5.1V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
51F	-	Gali-51F	MMIC	RF amplifier, DC..4GHz, 13.3dB (50Ω)	SOT-89	20aa	A1	4b	Mc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
51Y	-	BZV49-C51	Z-diode	51V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
52	-	ELM9752NAB	Vdet-IC	5.2V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
52	-	Gali-52	MMIC	RF amplifier, DC..2GHz, 14.4dB (50Ω)	SOT-89	20aa	A1	4b	Mc
520	jb	XC9111A201PR	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
521	jb	XC9111A211PR	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
522	jb	XC9111A221PR	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
523	jb	XC9111A231PR	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
524	jb	XC9111A241PR	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
525	jb	XC9111A251PR	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
526	jb	XC9111A261PR	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
527	jb	XC9111A271PR	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
528	jb	XC9111A281PR	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
529	jb	XC9111A291PR	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
52A	-	AAT60052A-S16	Vdet-IC	5.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
52B	-	AAT60052B-S16	Vdet-IC	5.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
52C	-	AAT60052C-S16	Vdet-IC	5.2V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
52D	-	AAT60052D-S16	Vdet-IC	5.2V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
53	-	ELM9753NAB	Vdet-IC	5.3V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
530	jb	XC9111A301PR	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
531	jb	XC9111A311PR	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
532	jb	XC9111A321PR	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
533	jb	XC9111A331PR	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
534	jb	XC9111A341PR	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
535	jb	XC9111A351PR	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
536	jb	XC9111A361PR	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
537	jb	XC9111A371PR	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
538	jb	XC9111A381PR	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
539	jb	XC9111A391PR	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
53A	-	AAT60053A-S16	Vdet-IC	5.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
53B	-	AAT60053B-S16	Vdet-IC	5.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
53C	-	AAT60053C-S16	Vdet-IC	5.3V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
53D	-	AAT60053D-S16	Vdet-IC	5.3V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
54	-	ELM9754NAB	Vdet-IC	5.4V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
540	jb	XC9111A401PR	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
541	jb	XC9111A411PR	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
542	jb	XC9111A421PR	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
543	jb	XC9111A431PR	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
544	jb	XC9111A441PR	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
545	jb	XC9111A451PR	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
546	jb	XC9111A461PR	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
547	jb	XC9111A471PR	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
548	jb	XC9111A481PR	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
549	jb	XC9111A491PR	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
54A	-	AAT60054A-S16	Vdet-IC	5.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
54B	-	AAT60054B-S16	Vdet-IC	5.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
54C	-	AAT60054C-S16	Vdet-IC	5.4V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
54D	-	AAT60054D-S16	Vdet-IC	5.4V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
55	-	ELM9755NAB	Vdet-IC	5.5V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
55	-	Gali-55	MMIC	RF amplifier, DC..4GHz, 15.7dB (50Ω)	SOT-89	20aa	A1	4b	Mc
550	jb	XC9111A501PR	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
551	jb	XC9111A511PR	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
552	jb	XC9111A521PR	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
553	jb	XC9111A531PR	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
554	jb	XC9111A541PR	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
555	-	FCX555	Si-pnp	Dr/Out, 180V, 750mA, 1.5W, B=100..300, 100MHz	SOT-89	20tb	-	4b	Zx
555	jb	XC9111A551PR	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
556	jb	XC9111A561PR	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
5564	-	CHT5564XPT	Si-npn	AF, Sw, 15V, 6A, B>250, 380MHz	SOT-89	20tb	-	4b	Chm
557	jb	XC9111A571PR	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
558	jb	XC9111A581PR	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
559	jb	XC9111A591PR	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
55A	-	AAT60055A-S16	Vdet-IC	5.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
55B	-	AAT60055B-S16	Vdet-IC	5.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
55C	-	AAT60055C-S16	Vdet-IC	5.5V±1%, -Reset ODO	SOT-89	20vda	VD6	4p	Aat
55D	-	AAT60055D-S16	Vdet-IC	5.5V±1%, -Reset PPO	SOT-89	20vda	VD7	4p	Aat
560	jb	XC9111A601PR	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
561	jb	XC9111A611PR	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
562	jb	XC9111A621PR	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
563	jb	XC9111A631PR	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
564	jb	XC9111A641PR	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
565	jb	XC9111A651PR	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
566	jb	XC9111A661PR	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
567	jb	XC9111A671PR	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
568	jb	XC9111A681PR	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
569	jb	XC9111A691PR	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
56Y	-	BZV49-C56	Z-diode	56V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Phi
570	jb	XC9111A701PR	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA	SOT-89	20bq	DC2	4c	Tor
5824	-	CHT5824XPT	Si-npn	AF, Sw, 60V, 3A, B=120..390, 200MHz	SOT-89	20tb	-	4b	Chm
59	-	Gali-59	MMIC	RF amplifier, DC..5GHz, 10.2dB (50Ω)	SOT-89	20aa	A1	4b	Mc
5A	-	BGA6589	MMIC	RF amp, DC..1.95GHz, 17dB (50Ω), Vcc=4.8V	SOT-89	20aa	A1	4g	Nxp
5A0	-	TC55RP502EMB	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
5A0	-	XC62FP5002P	LVR-IC	5.0V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
5A5	-	XC62KN502P	LVR-IC	LDO, -5.0V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
5B	-	RH5RL25AA	LVR-IC	2.5V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
5B0	-	TC55RP512EMB	LVR-IC	LDO, 5.1V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
5B0	-	XC62FP5102P	LVR-IC	5.1V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
5B5	-	XC62KN512P	LVR-IC	LDO, -5.1V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
5C	-	RH5RL35AA	LVR-IC	3.5V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
5C0	-	TC55RP522EMB	LVR-IC	LDO, 5.2V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
5C0	-	XC62FP5202P	LVR-IC	5.2V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
5C5	-	XC62KN522P	LVR-IC	LDO, -5.2V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
5D	-	FT533Di	LVR-IC	LDO, 1.8V±2%, 700mA	SOT-89	20vl	VR1	4k	Fmd
5D	-	RH5RL45AA	LVR-IC	4.5V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
5D0	-	TC55RP532EMB	LVR-IC	LDO, 5.3V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
5D0	-	XC62FP5302P	LVR-IC	5.3V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
5D5	-	XC62KN532P	LVR-IC	LDO, -5.3V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
5E	-	FT533Ei	LVR-IC	LDO, 2.5V±2%, 700mA	SOT-89	20vl	VR1	4k	Fmd
5E	-	RH5RL55AA	LVR-IC	5.5V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
5E0	-	TC55RP542EMB	LVR-IC	LDO, 5.4V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
5E0	-	XC62FP5402P	LVR-IC	5.4V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
5E5	-	XC62KN542P	LVR-IC	LDO, -5.4V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
5F	-	FT533Fi	LVR-IC	LDO, 2.7V±2%, 700mA	SOT-89	20vl	VR1	4k	Fmd
5F0	-	TC55RP552EMB	LVR-IC	LDO, 5.5V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
5F0	-	XC62FP5502P	LVR-IC	5.5V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
5F5	-	XC62KN552P	LVR-IC	LDO, -5.5V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
5G	-	FT533Gi	LVR-IC	LDO, 2.8V±2%, 700mA	SOT-89	20vl	VR1	4k	Fmd
5H	-	FT533Hi	LVR-IC	LDO, 2.85V±2%, 700mA	SOT-89	20vl	VR1	4k	Fmd
5H0	-	TC55RP562EMB	LVR-IC	LDO, 5.6V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
5H0	-	XC62FP5602P	LVR-IC	5.6V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
5H5	-	XC62KN562P	LVR-IC	LDO, -5.6V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
5I	-	FT533Ii	LVR-IC	LDO, 3.0V±2%, 700mA	SOT-89	20vl	VR1	4k	Fmd
5J	-	FT533Ji	LVR-IC	LDO, 3.3V±2%, 700mA	SOT-89	20vl	VR1	4k	Fmd
5J	-	RH5RE25AA	LVR-IC	Ultra-LDO, 2.5V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
5K	-	FT533Ki	LVR-IC	LDO, 3.6V±2%, 700mA	SOT-89	20vl	VR1	4k	Fmd
5K	-	RH5RE35AA	LVR-IC	Ultra-LDO, 3.5V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
5K0	-	TC55RP572EMB	LVR-IC	LDO, 5.7V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
5K0	-	XC62FP5702P	LVR-IC	5.7V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
5K5	-	XC62KN572P	LVR-IC	LDO, -5.7V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
5L	-	RH5RE45AA	LVR-IC	Ultra-LDO, 4.5V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
5L0	-	TC55RP582EMB	LVR-IC	LDO, 5.8V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
5L0	-	XC62FP5802P	LVR-IC	5.8V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
5L5	-	XC62KN582P	LVR-IC	LDO, -5.8V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
5M	-	RH5RE55AA	LVR-IC	Ultra-LDO, 5.5V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
5M0	-	TC55RP592EMB	LVR-IC	LDO, 5.9V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
5M0	-	XC62FP5902P	LVR-IC	5.9V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
5M5	-	XC62KN592P	LVR-IC	LDO, -5.9V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
5Y1	-	BZV49-C5V1	Z-diode	5.1V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
5Y6	-	BZV49-C5V6	Z-diode	5.6V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
60	jn	ELM7520NAB	Vdet-IC	2.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
60	jo	ELM7520CAB	Vdet-IC	2.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
605	-	FCX605	Si-npn-Darl	GP, 140V, 1A, 1W, B=5k..100k, >150MHz	SOT-89	20tb	-	4b	Zx
61	jn	ELM7521NAB	Vdet-IC	2.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
61	jo	ELM7521CAB	Vdet-IC	2.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
615	jb	XC9111B151PR	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
616	jb	XC9111B161PR	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
617	-	FCX617	Si-npn	Sw, 15V, 3A, 2W, B=200..415, >120MHz	SOT-89	20tb	-	4b	Zx
617	-	FCX619	Si-npn	Sw, 50V, 3A, 2W, B=100..200, 165MHz	SOT-89	20tb	-	4b	Zx
617	jb	XC9111B171PR	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
618	jb	XC9111B181PR	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
619	jb	XC9111B191PR	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
62	jn	ELM7522NAB	Vdet-IC	2.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
62	jo	ELM7522CAB	Vdet-IC	2.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
620	jb	XC9111B201PR	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
621	jb	XC9111B211PR	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
622	jb	XC9111B221PR	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
623	jb	XC9111B231PR	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
624	jb	XC9111B241PR	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
625	jb	XC9111B251PR	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
626	jb	XC9111B261PR	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
627	-	BST62-70	Si-pnp-Darl+Di	AF, 85V, 500mA, 1W, B>2000, 350MHz	SOT-89	20tb	-	4g	Zx
627	jb	XC9111B271PR	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
628	jb	XC9111B281PR	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
629	jb	XC9111B291PR	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
62Y	-	BZV49-C62	Z-diode	62V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Phi
63	jn	ELM7523NAB	Vdet-IC	2.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
63	jo	ELM7523CAB	Vdet-IC	2.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
630	-	TK11630U	LVR-IC	LDO, 3.0V±1.5%, 190mA	SOT-89	20hn	VR1	4d	Tok
630	jb	XC9111B301PR	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
631	jb	XC9111B311PR	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
632	jb	XC9111B321PR	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
633	-	TK11633U	LVR-IC	LDO, 3.3V±1.5%, 190mA	SOT-89	20hn	VR1	4d	Tok
633	jb	XC9111B331PR	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
634	jb	XC9111B341PR	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
635	jb	XC9111B351PR	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
636	jb	XC9111B361PR	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
637	jb	XC9111B371PR	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
638	jb	XC9111B381PR	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
639	jb	XC9111B391PR	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
64	jn	ELM7524NAB	Vdet-IC	2.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
64	jo	ELM7524CAB	Vdet-IC	2.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
640	jb	XC9111B401PR	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
641	jb	XC9111B411PR	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
642	jb	XC9111B421PR	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
643	jb	XC9111B431PR	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
644	jb	XC9111B441PR	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
645	jb	XC9111B451PR	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
646	jb	XC9111B461PR	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
647	jb	XC9111B471PR	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
648	jb	XC9111B481PR	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
649	jb	XC9111B491PR	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
649AB	-	WTM649A-B	Si-pnp	GP, 180V, 1.5A, 1W, B=60..120, 140MHz	SOT-89	20tb	-	4b	Wtr
649AC	-	WTM649A-C	Si-pnp	GP, 180V, 1.5A, 1W, B=100..200, 140MHz	SOT-89	20tb	-	4b	Wtr
65	jn	ELM7525NAB	Vdet-IC	2.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
65	jo	ELM7525CAB	Vdet-IC	2.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
650	-	LN1121P311PR	LVR-IC	LDO, 3.1V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
650	-	LN6206P311PR	LVR-IC	LDO, 3.1V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
650	-	TK11650U	LVR-IC	LDO, 5.0V±1.5%, 190mA	SOT-89	20hn	VR1	4d	Tok
650	-	XC6206P311PR	LVR-IC	LDO, 3.1V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
650	jb	XC9111B501PR	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
651	jb	XC9111B511PR	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
652	jb	XC9111B521PR	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
653	jb	XC9111B531PR	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
654	jb	XC9111B541PR	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
655	jb	XC9111B551PR	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
656	jb	XC9111B561PR	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
657	jb	XC9111B571PR	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
658	jb	XC9111B581PR	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
659	jb	XC9111B591PR	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
65A	-	FCX658A	Si-npn	Dr/Out, 400V, 1A, 1W, B=100..170, >50MHz	SOT-89	20tb	-	4b	Zx
65B	-	LN1121P122PR	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65B	-	LN6206P122PR	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65B	-	XC6206P122PR	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65C	-	LN1121P132PR	LVR-IC	LDO, 1.3V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65C	-	LN6206P132PR	LVR-IC	LDO, 1.3V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65C	-	XC6206P132PR	LVR-IC	LDO, 1.3V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65D	-	LN1121P142PR	LVR-IC	LDO, 1.4V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65D	-	LN6206P142PR	LVR-IC	LDO, 1.4V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65D	-	XC6206P142PR	LVR-IC	LDO, 1.4V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65E	-	LN1121P152PR	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65E	-	LN6206P152PR	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
65E	-	XC6206P152PR	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65F	-	LN1121P162PR	LVR-IC	LDO, 1.6V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65F	-	LN6206P162PR	LVR-IC	LDO, 1.6V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65F	-	XC6206P162PR	LVR-IC	LDO, 1.6V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65H	-	LN1121P172PR	LVR-IC	LDO, 1.7V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65H	-	LN6206P172PR	LVR-IC	LDO, 1.7V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65H	-	XC6206P172PR	LVR-IC	LDO, 1.7V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65K	-	LN1121P182PR	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65K	-	LN6206P182PR	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65K	-	XC6206P182PR	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65L	-	LN1121P192PR	LVR-IC	LDO, 1.9V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65L	-	LN6206P192PR	LVR-IC	LDO, 1.9V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65L	-	XC6206P192PR	LVR-IC	LDO, 1.9V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65M	-	LN1121P202PR	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65M	-	LN6206P202PR	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65M	-	XC6206P202PR	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65N	-	LN1121P212PR	LVR-IC	LDO, 2.1V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65N	-	LN6206P212PR	LVR-IC	LDO, 2.1V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65N	-	XC6206P212PR	LVR-IC	LDO, 2.1V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65P	-	LN1121P222PR	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65P	-	LN6206P222PR	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65P	-	XC6206P222PR	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65R	-	LN1121P232PR	LVR-IC	LDO, 2.3V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65R	-	LN6206P232PR	LVR-IC	LDO, 2.3V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65R	-	XC6206P232PR	LVR-IC	LDO, 2.3V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65S	-	LN1121P242PR	LVR-IC	LDO, 2.4V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65S	-	LN6206P242PR	LVR-IC	LDO, 2.4V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65S	-	XC6206P242PR	LVR-IC	LDO, 2.4V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65T	-	LN1121P252PR	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65T	-	LN6206P252PR	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65T	-	XC6206P252PR	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65U	-	LN1121P262PR	LVR-IC	LDO, 2.6V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65U	-	LN6206P262PR	LVR-IC	LDO, 2.6V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65U	-	XC6206P262PR	LVR-IC	LDO, 2.6V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65V	-	LN1121P272PR	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65V	-	LN6206P272PR	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65V	-	XC6206P272PR	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65X	-	LN1121P282PR	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65X	-	LN6206P282PR	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65X	-	XC6206P282PR	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65Y	-	LN1121P292PR	LVR-IC	LDO, 2.9V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65Y	-	LN6206P292PR	LVR-IC	LDO, 2.9V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65Y	-	XC6206P292PR	LVR-IC	LDO, 2.9V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
65Z	-	LN1121P302PR	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65Z	-	LN6206P302PR	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
65Z	-	XC6206P302PR	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
66	-	Gali-S66	MMIC	RF amplifier, DC..3GHz, 15.5dB (50Ω)	SOT-89	20aa	A1	4b	Mc
66	jn	ELM7526NAB	Vdet-IC	2.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
66	jo	ELM7526CAB	Vdet-IC	2.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
660	jb	XC9111B601PR	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
6601A	-	AX6601-15F	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89-3L	20vl	VR1	4n	Axl
6601B	-	AX6601-18F	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89-3L	20vl	VR1	4n	Axl
6601C	-	AX6601-25F	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89-3L	20vl	VR1	4n	Axl
6601D	-	AX6601-28F	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89-3L	20vl	VR1	4n	Axl
6601E	-	AX6601-30F	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89-3L	20vl	VR1	4n	Axl
6601F	-	AX6601-33F	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89-3L	20vl	VR1	4n	Axl
661	-	LN1121P322PR	LVR-IC	LDO, 3.2V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
661	-	LN6206P322PR	LVR-IC	LDO, 3.2V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
661	-	XC6206P322PR	LVR-IC	LDO, 3.2V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
661	jb	XC9111B611PR	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
662	-	LN1121P332PR	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
662	-	LN6206P332PR	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
662	-	XC6206P332PR	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
662	jb	XC9111B621PR	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
663	-	LN1121P342PR	LVR-IC	LDO, 3.4V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
663	-	LN6206P342PR	LVR-IC	LDO, 3.4V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
663	-	XC6206P342PR	LVR-IC	LDO, 3.4V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
663	jb	XC9111B631PR	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
6630a	-	AX6630-360F	LVR-IC	LDO, 3.6V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630A	-	AX6630-120F	LVR-IC	LDO, 1.2V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6630Aa	-	AX6630A-360F	LVR-IC	LDO, 3.6V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AA	-	AX6630A-120F	LVR-IC	LDO, 1.2V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630Ab	-	AX6630A-370F	LVR-IC	LDO, 3.7V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AB	-	AX6630A-130F	LVR-IC	LDO, 1.3V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AC	-	AX6630A-140F	LVR-IC	LDO, 1.4V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630Ad	-	AX6630A-380F	LVR-IC	LDO, 3.8V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AD	-	AX6630A-150F	LVR-IC	LDO, 1.5V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630Ae	-	AX6630A-390F	LVR-IC	LDO, 3.9V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AE	-	AX6630A-160F	LVR-IC	LDO, 1.6V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630Af	-	AX6630A-400F	LVR-IC	LDO, 4.0V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AF	-	AX6630A-170F	LVR-IC	LDO, 1.7V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630Ag	-	AX6630A-410F	LVR-IC	LDO, 4.1V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AG	-	AX6630A-180F	LVR-IC	LDO, 1.8V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630Ah	-	AX6630A-420F	LVR-IC	LDO, 4.2V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AH	-	AX6630A-190F	LVR-IC	LDO, 1.9V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AJ	-	AX6630A-200F	LVR-IC	LDO, 2.0V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AK	-	AX6630A-210F	LVR-IC	LDO, 2.1V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AL	-	AX6630A-220F	LVR-IC	LDO, 2.2V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630Am	-	AX6630A-430F	LVR-IC	LDO, 4.3V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AM	-	AX6630A-230F	LVR-IC	LDO, 2.3V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630An	-	AX6630A-440F	LVR-IC	LDO, 4.4V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AN	-	AX6630A-240F	LVR-IC	LDO, 2.4V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630Ao	-	AX6630A-450F	LVR-IC	LDO, 4.5V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AP	-	AX6630A-250F	LVR-IC	LDO, 2.5V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630Aq	-	AX6630A-460F	LVR-IC	LDO, 4.6V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AQ	-	AX6630A-260F	LVR-IC	LDO, 2.6V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630Ar	-	AX6630A-470F	LVR-IC	LDO, 4.7V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AR	-	AX6630A-270F	LVR-IC	LDO, 2.7V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AS	-	AX6630A-280F	LVR-IC	LDO, 2.8V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630At	-	AX6630A-480F	LVR-IC	LDO, 4.8V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AT	-	AX6630A-290F	LVR-IC	LDO, 2.9V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630Au	-	AX6630A-490F	LVR-IC	LDO, 4.9V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AU	-	AX6630A-300F	LVR-IC	LDO, 3.0V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AV	-	AX6630A-310F	LVR-IC	LDO, 3.1V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AW	-	AX6630A-320F	LVR-IC	LDO, 3.2V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AX	-	AX6630A-330F	LVR-IC	LDO, 3.3V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630Ay	-	AX6630A-500F	LVR-IC	LDO, 5.0V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AY	-	AX6630A-340F	LVR-IC	LDO, 3.4V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630AZ	-	AX6630A-350F	LVR-IC	LDO, 3.5V±2%, 1.2A	SOT-89	20cq	VR1	4n	Axl
6630b	-	AX6630-370F	LVR-IC	LDO, 3.7V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630B	-	AX6630-130F	LVR-IC	LDO, 1.3V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630C	-	AX6630-140F	LVR-IC	LDO, 1.4V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630d	-	AX6630-380F	LVR-IC	LDO, 3.8V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630D	-	AX6630-150F	LVR-IC	LDO, 1.5V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630e	-	AX6630-390F	LVR-IC	LDO, 3.9V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630E	-	AX6630-160F	LVR-IC	LDO, 1.6V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630f	-	AX6630-400F	LVR-IC	LDO, 4.0V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630F	-	AX6630-170F	LVR-IC	LDO, 1.7V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630g	-	AX6630-410F	LVR-IC	LDO, 4.1V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630G	-	AX6630-180F	LVR-IC	LDO, 1.8V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630h	-	AX6630-420F	LVR-IC	LDO, 4.2V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630H	-	AX6630-190F	LVR-IC	LDO, 1.9V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630J	-	AX6630-200F	LVR-IC	LDO, 2.0V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630K	-	AX6630-210F	LVR-IC	LDO, 2.1V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630L	-	AX6630-220F	LVR-IC	LDO, 2.2V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630m	-	AX6630-430F	LVR-IC	LDO, 4.3V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630M	-	AX6630-230F	LVR-IC	LDO, 2.3V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630n	-	AX6630-440F	LVR-IC	LDO, 4.4V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630N	-	AX6630-240F	LVR-IC	LDO, 2.4V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630o	-	AX6630-450F	LVR-IC	LDO, 4.5V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630P	-	AX6630-250F	LVR-IC	LDO, 2.5V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630q	-	AX6630-460F	LVR-IC	LDO, 4.6V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630Q	-	AX6630-260F	LVR-IC	LDO, 2.6V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630r	-	AX6630-470F	LVR-IC	LDO, 4.7V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630R	-	AX6630-270F	LVR-IC	LDO, 2.7V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630S	-	AX6630-280F	LVR-IC	LDO, 2.8V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630t	-	AX6630-480F	LVR-IC	LDO, 4.8V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630T	-	AX6630-290F	LVR-IC	LDO, 2.9V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630u	-	AX6630-490F	LVR-IC	LDO, 4.9V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630U	-	AX6630-300F	LVR-IC	LDO, 3.0V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6630V	-	AX6630-310F	LVR-IC	LDO, 3.1V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630W	-	AX6630-320F	LVR-IC	LDO, 3.2V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630X	-	AX6630-330F	LVR-IC	LDO, 3.3V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630y	-	AX6630-500F	LVR-IC	LDO, 5.0V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630Y	-	AX6630-340F	LVR-IC	LDO, 3.4V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6630Z	-	AX6630-350F	LVR-IC	LDO, 3.5V±2%, 1.2A	SOT-89	20eu	VR1	4n	Axl
6634a	-	AX6634-360F	LVR-IC	LDO, 3.6V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634A	-	AX6634-120F	LVR-IC	LDO, 1.2V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634b	-	AX6634-370F	LVR-IC	LDO, 3.7V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634B	-	AX6634-130F	LVR-IC	LDO, 1.3V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634C	-	AX6634-140F	LVR-IC	LDO, 1.4V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634d	-	AX6634-380F	LVR-IC	LDO, 3.8V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634D	-	AX6634-150F	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634e	-	AX6634-390F	LVR-IC	LDO, 3.9V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634E	-	AX6634-160F	LVR-IC	LDO, 1.6V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634f	-	AX6634-400F	LVR-IC	LDO, 4.0V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634F	-	AX6634-170F	LVR-IC	LDO, 1.7V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634g	-	AX6634-410F	LVR-IC	LDO, 4.1V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634G	-	AX6634-180F	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634h	-	AX6634-420F	LVR-IC	LDO, 4.2V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634H	-	AX6634-190F	LVR-IC	LDO, 1.9V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634J	-	AX6634-200F	LVR-IC	LDO, 2.0V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634K	-	AX6634-210F	LVR-IC	LDO, 2.1V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634L	-	AX6634-220F	LVR-IC	LDO, 2.2V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634m	-	AX6634-430F	LVR-IC	LDO, 4.3V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634M	-	AX6634-230F	LVR-IC	LDO, 2.3V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634n	-	AX6634-440F	LVR-IC	LDO, 4.4V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634N	-	AX6634-240F	LVR-IC	LDO, 2.4V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634o	-	AX6634-450F	LVR-IC	LDO, 4.5V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634P	-	AX6634-250F	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634q	-	AX6634-460F	LVR-IC	LDO, 4.6V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634Q	-	AX6634-260F	LVR-IC	LDO, 2.6V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634r	-	AX6634-470F	LVR-IC	LDO, 4.7V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634R	-	AX6634-270F	LVR-IC	LDO, 2.7V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634S	-	AX6634-280F	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634t	-	AX6634-480F	LVR-IC	LDO, 4.8V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634T	-	AX6634-290F	LVR-IC	LDO, 2.9V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634u	-	AX6634-490F	LVR-IC	LDO, 4.9V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634U	-	AX6634-300F	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634V	-	AX6634-310F	LVR-IC	LDO, 3.1V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634W	-	AX6634-320F	LVR-IC	LDO, 3.2V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634X	-	AX6634-330F	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634y	-	AX6634-500F	LVR-IC	LDO, 5.0V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634Y	-	AX6634-340F	LVR-IC	LDO, 3.4V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
6634Z	-	AX6634-350F	LVR-IC	LDO, 3.5V±2%, 600mA	SOT-89	20vl	VR1	4n	Axl
664	-	LN1121P352PR	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
664	-	LN6206P352PR	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
664	-	XC6206P352PR	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
664	jb	XC9111B641PR	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
665	-	LN1121P362PR	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
665	-	LN6206P362PR	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
665	-	XC6206P362PR	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
665	jb	XC9111B651PR	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
666	-	LN1121P372PR	LVR-IC	LDO, 3.7V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
666	-	LN6206P372PR	LVR-IC	LDO, 3.7V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
666	-	XC6206P372PR	LVR-IC	LDO, 3.7V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
666	jb	XC9111B661PR	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
667	-	LN1121P382PR	LVR-IC	LDO, 3.8V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
667	-	LN6206P382PR	LVR-IC	LDO, 3.8V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
667	-	XC6206P382PR	LVR-IC	LDO, 3.8V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
667	jb	XC9111B671PR	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
668	-	LN1121P392PR	LVR-IC	LDO, 3.9V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
668	-	LN6206P392PR	LVR-IC	LDO, 3.9V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
668	-	XC6206P392PR	LVR-IC	LDO, 3.9V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
668	jb	XC9111B681PR	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
669	-	LN1121P402PR	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
669	-	LN6206P402PR	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
669	-	XC6206P402PR	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
669	jb	XC9111B691PR	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
669AB	-	WTM669A-B	Si-npn	GP, 180V, 1.5A, 1W, B=60..120, 140MHz	SOT-89	20tb	-	4b	Wtr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
669AC	-	WTM669A-C	Si-npn	GP, 180V, 1.5A, 1W, B=100..200, 140MHz	SOT-89	20tb	-	4b	Wtr
66A	-	LN1121P412PR	LVR-IC	LDO, 4.1V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66A	-	LN6206P412PR	LVR-IC	LDO, 4.1V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66A	-	XC6206P412PR	LVR-IC	LDO, 4.1V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
66B	-	LN1121P422PR	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66B	-	LN6206P422PR	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66B	-	XC6206P422PR	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
66C	-	LN1121P432PR	LVR-IC	LDO, 4.3V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66C	-	LN6206P432PR	LVR-IC	LDO, 4.3V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66C	-	XC6206P432PR	LVR-IC	LDO, 4.3V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
66D	-	LN1121P442PR	LVR-IC	LDO, 4.4V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66D	-	LN6206P442PR	LVR-IC	LDO, 4.4V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66D	-	XC6206P442PR	LVR-IC	LDO, 4.4V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
66E	-	LN1121P452PR	LVR-IC	LDO, 4.5V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66E	-	LN6206P452PR	LVR-IC	LDO, 4.5V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66E	-	XC6206P452PR	LVR-IC	LDO, 4.5V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
66G	-	LN1121P462PR	LVR-IC	LDO, 4.6V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66G	-	LN6206P462PR	LVR-IC	LDO, 4.6V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66G	-	XC6206P462PR	LVR-IC	LDO, 4.6V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
66H	-	LN1121P472PR	LVR-IC	LDO, 4.7V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66H	-	LN6206P472PR	LVR-IC	LDO, 4.7V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66H	-	XC6206P472PR	LVR-IC	LDO, 4.7V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
66K	-	LN1121P482PR	LVR-IC	LDO, 4.8V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66K	-	LN6206P482PR	LVR-IC	LDO, 4.8V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66K	-	XC6206P482PR	LVR-IC	LDO, 4.8V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
66L	-	LN1121P492PR	LVR-IC	LDO, 4.9V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66L	-	LN6206P492PR	LVR-IC	LDO, 4.9V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66L	-	XC6206P492PR	LVR-IC	LDO, 4.9V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
66M	-	LN1121P502PR	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66M	-	LN6206P502PR	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-89	20vl	VR1	4h	Nln
66M	-	XC6206P502PR	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
67	jn	ELM7527NAB	Vdet-IC	2.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
67	jo	ELM7527CAB	Vdet-IC	2.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
670	jb	XC9111B701PR	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA	SOT-89	20br	DC5	4c	Tor
68	jn	ELM7528NAB	Vdet-IC	2.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
68	jo	ELM7528CAB	Vdet-IC	2.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
6861	-	CHM6861XPT	p-MOSFET	GP, 60V, 2.4A, 3W, Rds<0.18Ω(1.9A), 12/38ns	SOT-89	20fh	-	4d	Chm
688	-	FCX688B	Si-npn	Sw, 12V, 3A, 2W, B>400, >150MHz	SOT-89	20tb	-	4b	Zx
68BA	-	EUP7968-25CAI	LVR-IC	LDO, 2.5V±3%, 300mA	SOT-89	20ch	VR1	4b	Eut
68BB	-	EUP7968-25CBI	LVR-IC	LDO, 2.5V±3%, 300mA	SOT-89	20vl	VR1	4b	Eut
68CA	-	EUP7968-15CAI	LVR-IC	LDO, 1.5V±3%, 300mA	SOT-89	20ch	VR1	4b	Eut
68CB	-	EUP7968-15CBI	LVR-IC	LDO, 1.5V±3%, 300mA	SOT-89	20vl	VR1	4b	Eut
68DA	-	EUP7968-18CAI	LVR-IC	LDO, 1.8V±3%, 300mA	SOT-89	20ch	VR1	4b	Eut
68DB	-	EUP7968-18CBI	LVR-IC	LDO, 1.8V±3%, 300mA	SOT-89	20vl	VR1	4b	Eut
68EA	-	EUP7968-28CAI	LVR-IC	LDO, 2.8V±3%, 300mA	SOT-89	20ch	VR1	4b	Eut
68EB	-	EUP7968-28CBI	LVR-IC	LDO, 2.8V±3%, 300mA	SOT-89	20vl	VR1	4b	Eut
68GA	-	EUP7968-30CAI	LVR-IC	LDO, 3.0V±3%, 300mA	SOT-89	20ch	VR1	4b	Eut
68GB	-	EUP7968-30CBI	LVR-IC	LDO, 3.0V±3%, 300mA	SOT-89	20vl	VR1	4b	Eut
68HA	-	EUP7968-33CAI	LVR-IC	LDO, 3.3V±3%, 300mA	SOT-89	20ch	VR1	4b	Eut
68HB	-	EUP7968-33CBI	LVR-IC	LDO, 3.3V±3%, 300mA	SOT-89	20vl	VR1	4b	Eut
68RA	-	EUP7968-35CAI	LVR-IC	LDO, 3.5V±3%, 300mA	SOT-89	20ch	VR1	4b	Eut
68RB	-	EUP7968-35CBI	LVR-IC	LDO, 3.5V±3%, 300mA	SOT-89	20vl	VR1	4b	Eut
68Y	-	BZV49-C68	Z-diode	68V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Phi
69	jn	ELM7529NAB	Vdet-IC	2.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
69	jo	ELM7529CAB	Vdet-IC	2.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
690	-	FCX690B	Si-npn	Sw, 45V, 2A, 2W, B>400, >150MHz	SOT-89	20tb	-	4b	Zx
690	-	TK11690U	LVR-IC	LDO, 9V±1.5%, 190mA	SOT-89	20hn	VR1	4d	Tok
6A	-	FT531Ai	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-89	20vl	VR1	4k	Fmd
6A	-	KIA7019AF	Vdet-IC	1.9V, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
6A0	-	TC55RP602EMB	LVR-IC	LDO, 6.0V±2%, 250mA	SOT-89	20vl	VR1	4h	Mcc
6A0	-	XC62FP6002P	LVR-IC	6.0V±2%, 250mA	SOT-89	20vl	VR1	4c	Tor
6A5	-	XC62KN602P	LVR-IC	LDO, -6.0V±2%, 100mA, 500mW	SOT-89	20ch	VR2	4c	Tor
6B	-	FT531Bi	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-89	20vl	VR1	4k	Fmd
6B	-	KIA7021AF	Vdet-IC	2.1V, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
6B	-	RH5RL26AA	LVR-IC	2.6V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
6C	-	FT531Ci	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4k	Fmd
6C	-	KIA7023AF	Vdet-IC	2.3V, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
6C	-	RH5RL36AA	LVR-IC	3.6V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
6D	-	FT531Di	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4k	Fmd
6D	-	KIA7025AF	Vdet-IC	2.5V, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6D	-	RH5RL46AA	LVR-IC	4.6V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
6E	-	FT531Ei	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4k	Fmd
6E	-	KIA7027AF	Vdet-IC	2.7V, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
6E	-	RH5RL56AA	LVR-IC	5.6V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
6F	-	FT531Fi	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4k	Fmd
6F	-	KIA7029AF	Vdet-IC	2.9V, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
6G	-	FT531Gi	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4k	Fmd
6G	-	KIA7031AF	Vdet-IC	3.1V, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
6H	-	FT531Hi	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-89	20vl	VR1	4k	Fmd
6H	-	KIA7032AF	Vdet-IC	3.2V, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
6I	-	FT531Ii	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4k	Fmd
6J	-	FT531Ji	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4k	Fmd
6J	-	KIA7033AF	Vdet-IC	3.3V, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
6J	-	RH5RE26AA	LVR-IC	Ultra-LDO, 2.6V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
6K	-	FT531Ki	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20vl	VR1	4k	Fmd
6K	-	KIA7034AF	Vdet-IC	3.4V, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
6K	-	RH5RE36AA	LVR-IC	Ultra-LDO, 3.6V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
6L	-	KIA7035AF	Vdet-IC	3.5V, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
6L	-	RH5RE46AA	LVR-IC	Ultra-LDO, 4.6V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
6M	-	KIA7036AF	Vdet-IC	3.6V, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
6M	-	RH5RE56AA	LVR-IC	Ultra-LDO, 5.6V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
6N	-	KIA7039AF	Vdet-IC	3.9V, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
6P	-	KIA7042AF	Vdet-IC	4.2V, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
6R	-	KIA7045AF	Vdet-IC	4.5V, -Reset OCO	SOT-89	20vdd	VD6	4a	Kec
6Y2	-	BZV49-C6V2	Z-diode	6.2V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
6Y8	-	BZV49-C6V8	Z-diode	6.8V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
70	jn	ELM7530NAB	Vdet-IC	3.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
70	jo	ELM7530CAB	Vdet-IC	3.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
7024A-1	-	HT7024A-1	Vdet-IC	2.4V±2%,-Reset ODO	SOT-89	20vda	VD6	4b	Htk
7027A-1	-	HT7027A-1	Vdet-IC	2.7V±2%,-Reset ODO	SOT-89	20vda	VD6	4b	Htk
7033A-1	-	HT7033A-1	Vdet-IC	3.3V±2%,-Reset ODO	SOT-89	20vda	VD6	4b	Htk
7039A-1	-	HT7039A-1	Vdet-IC	3.9V±2%,-Reset ODO	SOT-89	20vda	VD6	4b	Htk
7044A-1	-	HT7044A-1	Vdet-IC	4.4V±2%,-Reset ODO	SOT-89	20vda	VD6	4b	Htk
705	-	FCX705	Si-pnp-Darl	HV, 140V, 1A, 1W, B=3k..30k, >150MHz	SOT-89	20tb	-	4b	Zx
7050A-1	-	HT7050A-1	Vdet-IC	5.0V±2%,-Reset ODO	SOT-89	20vda	VD6	4b	Htk
71	jn	ELM7531NAB	Vdet-IC	3.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
71	jo	ELM7531CAB	Vdet-IC	3.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
7130-1	-	HT7130-1	LVR-IC	LDO, 3.0V±3%, 30mA	SOT-89	20vl	VR1	4b	Htk
7133-1	-	HT7133-1	LVR-IC	LDO, 3.3V±3%, 30mA	SOT-89	20vl	VR1	4b	Htk
7136-1	-	HT7136-1	LVR-IC	LDO, 3.6V±3%, 30mA	SOT-89	20vl	VR1	4b	Htk
7144-1	-	HT7144-1	LVR-IC	LDO, 4.4V±3%, 30mA	SOT-89	20vl	VR1	4b	Htk
7150-1	-	HT7150-1	LVR-IC	LDO, 5.0V±3%, 30mA	SOT-89	20vl	VR1	4b	Htk
717	-	2SB717PT	Si-pnp	AF, Sw, 12V, 3A, B=300..450, 110MHz	SOT-89	20tb	-	4g	Chm
717	-	FCX717	Si-pnp	Sw, 12V, 3A, 2W, B=300..450, >110MHz	SOT-89	20tb	-	4b	Zx
718	-	FCX718	Si-pnp	Sw, 20V, 2.5A, 2W, B=300..450, >180MHz	SOT-89	20tb	-	4b	Zx
72	jn	ELM7532NAB	Vdet-IC	3.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
72	jo	ELM7532CAB	Vdet-IC	3.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
73	jn	ELM7533NAB	Vdet-IC	3.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
73	jo	ELM7533CAB	Vdet-IC	3.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
73L19	-	SJ73L19F	Vdet-IC	1.9V±5%, -Reset OCO	SOT-89	20vdd	VD6	4b	Kau
73L21	-	SJ73L21F	Vdet-IC	2.1V±5%, -Reset OCO	SOT-89	20vdd	VD6	4b	Kau
73L23	-	SJ73L23F	Vdet-IC	2.3V±5%, -Reset OCO	SOT-89	20vdd	VD6	4b	Kau
73L25	-	SJ73L25F	Vdet-IC	2.5V±5%, -Reset OCO	SOT-89	20vdd	VD6	4b	Kau
73L27	-	SJ73L27F	Vdet-IC	2.7V±5%, -Reset OCO	SOT-89	20vdd	VD6	4b	Kau
73L29	-	SJ73L29F	Vdet-IC	2.9V±5%, -Reset OCO	SOT-89	20vdd	VD6	4b	Kau
73L31	-	SJ73L31F	Vdet-IC	3.1V±5%, -Reset OCO	SOT-89	20vdd	VD6	4b	Kau
73L32	-	SJ73L32F	Vdet-IC	3.2V±5%, -Reset OCO	SOT-89	20vdd	VD6	4b	Kau
73L33	-	SJ73L33F	Vdet-IC	3.3V±5%, -Reset OCO	SOT-89	20vdd	VD6	4b	Kau
73L34	-	SJ73L34F	Vdet-IC	3.4V±5%, -Reset OCO	SOT-89	20vdd	VD6	4b	Kau
73L35	-	SJ73L35F	Vdet-IC	3.5V±5%, -Reset OCO	SOT-89	20vdd	VD6	4b	Kau
73L36	-	SJ73L36F	Vdet-IC	3.6V±5%, -Reset OCO	SOT-89	20vdd	VD6	4b	Kau
73L39	-	SJ73L39F	Vdet-IC	3.9V±5%, -Reset OCO	SOT-89	20vdd	VD6	4b	Kau
73L42	-	SJ73L42F	Vdet-IC	4.2V±5%, -Reset OCO	SOT-89	20vdd	VD6	4b	Kau
73L45	-	SJ73L45F	Vdet-IC	4.5V±5%, -Reset OCO	SOT-89	20vdd	VD6	4b	Kau
74	jn	ELM7534NAB	Vdet-IC	3.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
74	jo	ELM7534CAB	Vdet-IC	3.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
75	jn	ELM7535NAB	Vdet-IC	3.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
75	jo	ELM7535CAB	Vdet-IC	3.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
75Y	-	BZV49-C75	Z-diode	75V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
76	jn	ELM7536NAB	Vdet-IC	3.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
76	jo	ELM7536CAB	Vdet-IC	3.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
76H19	-	SJ76H19F	Vdet-IC	1.9V±5%, +Reset OCO	SOT-89	20vdd	VD6	4b	Kau
76H21	-	SJ76H21F	Vdet-IC	2.1V±5%, +Reset OCO	SOT-89	20vdd	VD6	4b	Kau
76H23	-	SJ76H23F	Vdet-IC	2.3V±5%, +Reset OCO	SOT-89	20vdd	VD6	4b	Kau
76H25	-	SJ76H25F	Vdet-IC	2.5V±5%, +Reset OCO	SOT-89	20vdd	VD6	4b	Kau
76H27	-	SJ76H27F	Vdet-IC	2.7V±5%, +Reset OCO	SOT-89	20vdd	VD6	4b	Kau
76H29	-	SJ76H29F	Vdet-IC	2.9V±5%, +Reset OCO	SOT-89	20vdd	VD6	4b	Kau
76H31	-	SJ76H31F	Vdet-IC	3.1V±5%, +Reset OCO	SOT-89	20vdd	VD6	4b	Kau
76H32	-	SJ76H32F	Vdet-IC	3.2V±5%, +Reset OCO	SOT-89	20vdd	VD6	4b	Kau
76H33	-	SJ76H33F	Vdet-IC	3.3V±5%, +Reset OCO	SOT-89	20vdd	VD6	4b	Kau
76H34	-	SJ76H34F	Vdet-IC	3.4V±5%, +Reset OCO	SOT-89	20vdd	VD6	4b	Kau
76H35	-	SJ76H35F	Vdet-IC	3.5V±5%, +Reset OCO	SOT-89	20vdd	VD6	4b	Kau
76H36	-	SJ76H36F	Vdet-IC	3.6V±5%, +Reset OCO	SOT-89	20vdd	VD6	4b	Kau
76H39	-	SJ76H39F	Vdet-IC	3.9V±5%, +Reset OCO	SOT-89	20vdd	VD6	4b	Kau
76H42	-	SJ76H42F	Vdet-IC	4.2V±5%, +Reset OCO	SOT-89	20vdd	VD6	4b	Kau
76H45	-	SJ76H45F	Vdet-IC	4.5V±5%, +Reset OCO	SOT-89	20vdd	VD6	4b	Kau
77	jn	ELM7537NAB	Vdet-IC	3.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
77	jo	ELM7537CAB	Vdet-IC	3.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
772	-	2SB772PT-P	Si-pnp	AF, Sw, 30V, 3A, B=160..320, 300MHz	SOT-89	20tb	-	4g	Chm
78	jn	ELM7538NAB	Vdet-IC	3.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
78	jo	ELM7538CAB	Vdet-IC	3.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
789	-	FCX789A	Si-pnp	Sw, 25V, 3A, 2W, B=300..800, >100MHz	SOT-89	20tb	-	4b	Zx
78L05	-	SN78L05F	LVR-IC	5.0V±10%, 150mA	SOT-89	20vl	VR1	4b	Kau
78L06	-	SN78L06F	LVR-IC	6.0V±10%, 150mA	SOT-89	20vl	VR1	4b	Kau
78L08	-	SN78L08F	LVR-IC	8.0V±10%, 150mA	SOT-89	20vl	VR1	4b	Kau
78L09	-	SN78L09F	LVR-IC	9.0V±10%, 150mA	SOT-89	20vl	VR1	4b	Kau
78L10	-	SN78L10F	LVR-IC	10V±10%, 150mA	SOT-89	20vl	VR1	4b	Kau
78L12	-	SN78L12F	LVR-IC	12V±10%, 150mA	SOT-89	20vl	VR1	4b	Kau
78L15	-	SN78L15F	LVR-IC	15V±10%, 150mA	SOT-89	20vl	VR1	4b	Kau
78L18	-	SN78L18F	LVR-IC	18V±10%, 150mA	SOT-89	20vl	VR1	4b	Kau
78L24	-	SN78L24F	LVR-IC	24V±10%, 150mA	SOT-89	20vl	VR1	4b	Kau
79	jn	ELM7539NAB	Vdet-IC	3.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
79	jo	ELM7539CAB	Vdet-IC	3.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
790	-	FCX790A	Si-pnp	Sw, 50V, 2A, 2W, B=300..800, >100MHz	SOT-89	20tb	-	4b	Zx
798G	-	KSB798-G	Si-pnp	AF-Drv, 30V, 1A, 2W, B=200..400, >110MHz	SOT-89	20tb	-	4n	F
798O	-	KSB798-O	Si-pnp	AF-Drv, 30V, 1A, 2W, B=90..180, >110MHz	SOT-89	20tb	-	4n	F
798Y	-	KSB798-Y	Si-pnp	AF-Drv, 30V, 1A, 2W, B=135..270, >110MHz	SOT-89	20tb	-	4n	F
79L05	-	SN79L05F	LVR-IC	-5.0V±10%, 150mA	SOT-89	20vl	VR2	4b	Kau
79L06	-	SN79L06F	LVR-IC	-6.0V±10%, 150mA	SOT-89	20vl	VR2	4b	Kau
79L08	-	SN79L08F	LVR-IC	-8.0V±10%, 150mA	SOT-89	20vl	VR2	4b	Kau
79L12	-	SN79L12F	LVR-IC	-12V±10%, 150mA	SOT-89	20vl	VR2	4b	Kau
79L15	-	SN79L15F	LVR-IC	-15V±10%, 150mA	SOT-89	20vl	VR2	4b	Kau
79L18	-	SN79L18F	LVR-IC	-18V±10%, 150mA	SOT-89	20vl	VR2	4b	Kau
79L24	-	SN79L24F	LVR-IC	-24V±10%, 150mA	SOT-89	20vl	VR2	4b	Kau
7B	-	RH5RL27AA	LVR-IC	2.7V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
7C	-	RH5RL37AA	LVR-IC	3.7V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
7D	-	FT532Di	LVR-IC	LDO, 1.8V±2%, 700mA	SOT-89	20vl	VR1	4k	Fmd
7D	-	RH5RL47AA	LVR-IC	4.7V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
7E	-	FT532Ei	LVR-IC	LDO, 2.5V±2%, 700mA	SOT-89	20vl	VR1	4k	Fmd
7E	-	RH5RL57AA	LVR-IC	5.7V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
7F	-	FT532Fi	LVR-IC	LDO, 2.7V±2%, 700mA	SOT-89	20vl	VR1	4k	Fmd
7G	-	FT532Gi	LVR-IC	LDO, 2.8V±2%, 700mA	SOT-89	20vl	VR1	4k	Fmd
7H	-	FT532Hi	LVR-IC	LDO, 2.85V±2%, 700mA	SOT-89	20vl	VR1	4k	Fmd
7I	-	FT532Ii	LVR-IC	LDO, 3.0V±2%, 700mA	SOT-89	20vl	VR1	4k	Fmd
7J	-	FT532Ji	LVR-IC	LDO, 3.3V±2%, 700mA	SOT-89	20vl	VR1	4k	Fmd
7J	-	RH5RE27AA	LVR-IC	Ultra-LDO, 2.7V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
7K	-	FT532Ki	LVR-IC	LDO, 3.6V±2%, 700mA	SOT-89	20vl	VR1	4k	Fmd
7K	-	RH5RE37AA	LVR-IC	Ultra-LDO, 3.7V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
7L	-	RH5RE47AA	LVR-IC	Ultra-LDO, 4.7V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
7M	-	RH5RE57AA	LVR-IC	Ultra-LDO, 5.7V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
7Y5	-	BZV49-C7V5	Z-diode	7.5V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
80	jn	ELM7540NAB	Vdet-IC	4.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
80	jo	ELM7540CAB	Vdet-IC	4.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
81	jn	ELM7541NAB	Vdet-IC	4.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
81	jo	ELM7541CAB	Vdet-IC	4.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
82	jn	ELM7542NAB	Vdet-IC	4.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
82	jo	ELM7542CAB	Vdet-IC	4.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
83	jn	ELM7543NAB	Vdet-IC	4.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
83	jo	ELM7543CAB	Vdet-IC	4.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
84	jn	ELM7544NAB	Vdet-IC	4.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
84	jo	ELM7544CAB	Vdet-IC	4.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
842	-	MCP1804T-3302I/MB	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-89	20ch	VR1	4ra	Mcc
849	-	MCP1804T-A002I/MB	LVR-IC	LDO, 10.0V±2%, 150mA	SOT-89	20ch	VR1	4ra	Mcc
84K	-	MCP1804T-1802I/MB	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-89	20ch	VR1	4ra	Mcc
84K	-	XC6701D18PR	LVR-IC	1.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
84L	-	XC6701D19PR	LVR-IC	1.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
84M	-	MCP1804T-5002I/MB	LVR-IC	LDO, 5.0V±2%, 150mA	SOT-89	20ch	VR1	4ra	Mcc
84M	-	XC6701D20PR	LVR-IC	2.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
84N	-	XC6701D21PR	LVR-IC	2.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
84P	-	XC6701D22PR	LVR-IC	2.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
84R	-	XC6701D23PR	LVR-IC	2.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
84S	-	XC6701D24PR	LVR-IC	2.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
84T	-	MCP1804T-2502I/MB	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-89	20ch	VR1	4ra	Mcc
84T	-	XC6701D25PR	LVR-IC	2.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
84U	-	XC6701D26PR	LVR-IC	2.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
84V	-	XC6701D27PR	LVR-IC	2.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
84X	-	XC6701D28PR	LVR-IC	2.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
84Y	-	XC6701D29PR	LVR-IC	2.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
84Z	-	MCP1804T-3002I/MB	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-89	20ch	VR1	4ra	Mcc
84Z	-	XC6701D30PR	LVR-IC	3.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85	jn	ELM7545NAB	Vdet-IC	4.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
85	jo	ELM7545CAB	Vdet-IC	4.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
850	-	XC6701D31PR	LVR-IC	3.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8506C09	-	BL8506-09CSM	Vdet-IC	0.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C10	-	BL8506-10CSM	Vdet-IC	1.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C11	-	BL8506-11CSM	Vdet-IC	1.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C12	-	BL8506-12CSM	Vdet-IC	1.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C13	-	BL8506-13CSM	Vdet-IC	1.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C14	-	BL8506-14CSM	Vdet-IC	1.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C15	-	BL8506-15CSM	Vdet-IC	1.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C16	-	BL8506-16CSM	Vdet-IC	1.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C17	-	BL8506-17CSM	Vdet-IC	1.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C18	-	BL8506-18CSM	Vdet-IC	1.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C19	-	BL8506-19CSM	Vdet-IC	1.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C20	-	BL8506-20CSM	Vdet-IC	2.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C21	-	BL8506-21CSM	Vdet-IC	2.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C22	-	BL8506-22CSM	Vdet-IC	2.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C23	-	BL8506-23CSM	Vdet-IC	2.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C24	-	BL8506-24CSM	Vdet-IC	2.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C25	-	BL8506-25CSM	Vdet-IC	2.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C26	-	BL8506-26CSM	Vdet-IC	2.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C27	-	BL8506-27CSM	Vdet-IC	2.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C28	-	BL8506-28CSM	Vdet-IC	2.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C29	-	BL8506-29CSM	Vdet-IC	2.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C30	-	BL8506-30CSM	Vdet-IC	3.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C31	-	BL8506-31CSM	Vdet-IC	3.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C32	-	BL8506-32CSM	Vdet-IC	3.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C33	-	BL8506-33CSM	Vdet-IC	3.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C34	-	BL8506-34CSM	Vdet-IC	3.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C35	-	BL8506-35CSM	Vdet-IC	3.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C36	-	BL8506-36CSM	Vdet-IC	3.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C37	-	BL8506-37CSM	Vdet-IC	3.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C38	-	BL8506-38CSM	Vdet-IC	3.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C39	-	BL8506-39CSM	Vdet-IC	3.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C40	-	BL8506-40CSM	Vdet-IC	4.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C41	-	BL8506-41CSM	Vdet-IC	4.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C42	-	BL8506-42CSM	Vdet-IC	4.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C43	-	BL8506-43CSM	Vdet-IC	4.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C44	-	BL8506-44CSM	Vdet-IC	4.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C45	-	BL8506-45CSM	Vdet-IC	4.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C46	-	BL8506-46CSM	Vdet-IC	4.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C47	-	BL8506-47CSM	Vdet-IC	4.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C48	-	BL8506-48CSM	Vdet-IC	4.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C49	-	BL8506-49CSM	Vdet-IC	4.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C50	-	BL8506-50CSM	Vdet-IC	5.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C51	-	BL8506-51CSM	Vdet-IC	5.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C52	-	BL8506-52CSM	Vdet-IC	5.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C53	-	BL8506-53CSM	Vdet-IC	5.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C54	-	BL8506-54CSM	Vdet-IC	5.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C55	-	BL8506-55CSM	Vdet-IC	5.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8506C56	-	BL8506-56CSM	Vdet-IC	5.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C57	-	BL8506-57CSM	Vdet-IC	5.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C58	-	BL8506-58CSM	Vdet-IC	5.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C59	-	BL8506-59CSM	Vdet-IC	5.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506C60	-	BL8506-60CSM	Vdet-IC	6.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Shb
8506N09	-	BL8506-09NSM	Vdet-IC	0.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N10	-	BL8506-10NSM	Vdet-IC	1.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N11	-	BL8506-11NSM	Vdet-IC	1.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N12	-	BL8506-12NSM	Vdet-IC	1.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N13	-	BL8506-13NSM	Vdet-IC	1.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N14	-	BL8506-14NSM	Vdet-IC	1.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N15	-	BL8506-15NSM	Vdet-IC	1.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N16	-	BL8506-16NSM	Vdet-IC	1.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N17	-	BL8506-17NSM	Vdet-IC	1.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N18	-	BL8506-18NSM	Vdet-IC	1.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N19	-	BL8506-19NSM	Vdet-IC	1.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N20	-	BL8506-20NSM	Vdet-IC	2.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N21	-	BL8506-21NSM	Vdet-IC	2.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N22	-	BL8506-22NSM	Vdet-IC	2.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N23	-	BL8506-23NSM	Vdet-IC	2.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N24	-	BL8506-24NSM	Vdet-IC	2.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N25	-	BL8506-25NSM	Vdet-IC	2.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N26	-	BL8506-26NSM	Vdet-IC	2.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N27	-	BL8506-27NSM	Vdet-IC	2.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N28	-	BL8506-28NSM	Vdet-IC	2.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N29	-	BL8506-29NSM	Vdet-IC	2.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N30	-	BL8506-30NSM	Vdet-IC	3.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N31	-	BL8506-31NSM	Vdet-IC	3.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N32	-	BL8506-32NSM	Vdet-IC	3.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N33	-	BL8506-33NSM	Vdet-IC	3.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N34	-	BL8506-34NSM	Vdet-IC	3.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N35	-	BL8506-35NSM	Vdet-IC	3.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N36	-	BL8506-36NSM	Vdet-IC	3.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N37	-	BL8506-37NSM	Vdet-IC	3.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N38	-	BL8506-38NSM	Vdet-IC	3.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N39	-	BL8506-39NSM	Vdet-IC	3.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N40	-	BL8506-40NSM	Vdet-IC	4.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N41	-	BL8506-41NSM	Vdet-IC	4.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N42	-	BL8506-42NSM	Vdet-IC	4.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N43	-	BL8506-43NSM	Vdet-IC	4.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N44	-	BL8506-44NSM	Vdet-IC	4.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N45	-	BL8506-45NSM	Vdet-IC	4.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N46	-	BL8506-46NSM	Vdet-IC	4.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N47	-	BL8506-47NSM	Vdet-IC	4.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N48	-	BL8506-48NSM	Vdet-IC	4.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N49	-	BL8506-49NSM	Vdet-IC	4.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N50	-	BL8506-50NSM	Vdet-IC	5.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N51	-	BL8506-51NSM	Vdet-IC	5.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N52	-	BL8506-52NSM	Vdet-IC	5.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N53	-	BL8506-53NSM	Vdet-IC	5.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N54	-	BL8506-54NSM	Vdet-IC	5.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N55	-	BL8506-55NSM	Vdet-IC	5.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N56	-	BL8506-56NSM	Vdet-IC	5.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N57	-	BL8506-57NSM	Vdet-IC	5.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N58	-	BL8506-58NSM	Vdet-IC	5.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N59	-	BL8506-59NSM	Vdet-IC	5.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
8506N60	-	BL8506-60NSM	Vdet-IC	6.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Shb
851	-	XC6701D32PR	LVR-IC	3.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
852	-	XC6701D33PR	LVR-IC	3.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
853	-	XC6701D34PR	LVR-IC	3.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
854	-	XC6701D35PR	LVR-IC	3.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
855	-	XC6701D36PR	LVR-IC	3.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
855315	-	BL8553-15PSM	LVR-IC	LDO, 1.5V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855316	-	BL8553-16PSM	LVR-IC	LDO, 1.6V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855317	-	BL8553-17PSM	LVR-IC	LDO, 1.7V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855318	-	BL8553-18PSM	LVR-IC	LDO, 1.8V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855319	-	BL8553-19PSM	LVR-IC	LDO, 1.9V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855320	-	BL8553-20PSM	LVR-IC	LDO, 2.0V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855321	-	BL8553-21PSM	LVR-IC	LDO, 2.1V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855322	-	BL8553-22PSM	LVR-IC	LDO, 2.2V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
855323	-	BL8553-23PSM	LVR-IC	LDO, 2.3V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855324	-	BL8553-24PSM	LVR-IC	LDO, 2.4V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855325	-	BL8553-25PSM	LVR-IC	LDO, 2.5V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855326	-	BL8553-26PSM	LVR-IC	LDO, 2.6V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855327	-	BL8553-27PSM	LVR-IC	LDO, 2.7V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855328	-	BL8553-28PSM	LVR-IC	LDO, 2.8V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855329	-	BL8553-29PSM	LVR-IC	LDO, 2.9V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855330	-	BL8553-30PSM	LVR-IC	LDO, 3.0V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855331	-	BL8553-31PSM	LVR-IC	LDO, 3.1V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855332	-	BL8553-32PSM	LVR-IC	LDO, 3.2V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855333	-	BL8553-33PSM	LVR-IC	LDO, 3.3V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855334	-	BL8553-34PSM	LVR-IC	LDO, 3.4V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855335	-	BL8553-35PSM	LVR-IC	LDO, 3.5V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855336	-	BL8553-36PSM	LVR-IC	LDO, 3.6V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855337	-	BL8553-37PSM	LVR-IC	LDO, 3.7V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855338	-	BL8553-38PSM	LVR-IC	LDO, 3.8V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855339	-	BL8553-39PSM	LVR-IC	LDO, 3.9V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855340	-	BL8553-40PSM	LVR-IC	LDO, 4.0V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855341	-	BL8553-41PSM	LVR-IC	LDO, 4.1V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855342	-	BL8553-42PSM	LVR-IC	LDO, 4.2V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855343	-	BL8553-43PSM	LVR-IC	LDO, 4.3V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855344	-	BL8553-44PSM	LVR-IC	LDO, 4.4V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855345	-	BL8553-45PSM	LVR-IC	LDO, 4.5V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855346	-	BL8553-46PSM	LVR-IC	LDO, 4.6V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855347	-	BL8553-47PSM	LVR-IC	LDO, 4.7V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855348	-	BL8553-48PSM	LVR-IC	LDO, 4.8V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855349	-	BL8553-49PSM	LVR-IC	LDO, 4.9V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855350	-	BL8553-50PSM	LVR-IC	LDO, 5.0V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855351	-	BL8553-51PSM	LVR-IC	LDO, 5.1V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855352	-	BL8553-52PSM	LVR-IC	LDO, 5.2V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855353	-	BL8553-53PSM	LVR-IC	LDO, 5.3V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855354	-	BL8553-54PSM	LVR-IC	LDO, 5.4V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855355	-	BL8553-55PSM	LVR-IC	LDO, 5.5V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855356	-	BL8553-56PSM	LVR-IC	LDO, 5.6V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855357	-	BL8553-57PSM	LVR-IC	LDO, 5.7V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855358	-	BL8553-58PSM	LVR-IC	LDO, 5.8V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855359	-	BL8553-59PSM	LVR-IC	LDO, 5.9V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855360	-	BL8553-60PSM	LVR-IC	LDO, 6.0V±2%, 200mA	SOT-89	20vl	VR1	4mb	Shb
855812A	-	BL8558-12PSA	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855812A	-	LR8558-12PSA	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855812B	-	BL8558-12PSB	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855812B	-	LR8558-12PSB	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855813A	-	BL8558-13PSA	LVR-IC	LDO, 1.3V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855813A	-	LR8558-13PSA	LVR-IC	LDO, 1.3V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855813B	-	BL8558-13PSB	LVR-IC	LDO, 1.3V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855813B	-	LR8558-13PSB	LVR-IC	LDO, 1.3V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855814A	-	BL8558-14PSA	LVR-IC	LDO, 1.4V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855814A	-	LR8558-14PSA	LVR-IC	LDO, 1.4V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855814B	-	BL8558-14PSB	LVR-IC	LDO, 1.4V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855814B	-	LR8558-14PSB	LVR-IC	LDO, 1.4V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855815A	-	BL8558-15PSA	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855815A	-	LR8558-15PSA	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855815B	-	BL8558-15PSB	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855815B	-	LR8558-15PSB	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855816A	-	BL8558-16PSA	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855816A	-	LR8558-16PSA	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855816B	-	BL8558-16PSB	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855816B	-	LR8558-16PSB	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855817A	-	BL8558-17PSA	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855817A	-	LR8558-17PSA	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855817B	-	BL8558-17PSB	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855817B	-	LR8558-17PSB	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855818A	-	BL8558-18PSA	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855818A	-	LR8558-18PSA	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855818B	-	BL8558-18PSB	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855818B	-	LR8558-18PSB	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855819A	-	BL8558-19PSA	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855819A	-	LR8558-19PSA	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855819B	-	BL8558-19PSB	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855819B	-	LR8558-19PSB	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
855820A	-	BL8558-20PSA	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855820A	-	LR8558-20PSA	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855820B	-	BL8558-20PSB	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855820B	-	LR8558-20PSB	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855821A	-	BL8558-21PSA	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855821A	-	LR8558-21PSA	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855821B	-	BL8558-21PSB	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855821B	-	LR8558-21PSB	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855822A	-	BL8558-22PSA	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855822A	-	LR8558-22PSA	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855822B	-	BL8558-22PSB	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855822B	-	LR8558-22PSB	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855823A	-	BL8558-23PSA	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855823A	-	LR8558-23PSA	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855823B	-	BL8558-23PSB	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855823B	-	LR8558-23PSB	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855824A	-	BL8558-24PSA	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855824A	-	LR8558-24PSA	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855824B	-	BL8558-24PSB	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855824B	-	LR8558-24PSB	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855825A	-	BL8558-25PSA	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855825A	-	LR8558-25PSA	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855825B	-	BL8558-25PSB	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855825B	-	LR8558-25PSB	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855826A	-	BL8558-26PSA	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855826A	-	LR8558-26PSA	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855826B	-	BL8558-26PSB	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855826B	-	LR8558-26PSB	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855827A	-	BL8558-27PSA	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855827A	-	LR8558-27PSA	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855827B	-	BL8558-27PSB	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855827B	-	LR8558-27PSB	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855828A	-	BL8558-28PSA	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855828A	-	LR8558-28PSA	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855828B	-	BL8558-28PSB	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855828B	-	LR8558-28PSB	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855829A	-	BL8558-29PSA	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855829A	-	LR8558-29PSA	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855829B	-	BL8558-29PSB	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855829B	-	LR8558-29PSB	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855830A	-	BL8558-30PSA	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855830A	-	LR8558-30PSA	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855830B	-	BL8558-30PSB	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855830B	-	LR8558-30PSB	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855831A	-	BL8558-31PSA	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855831A	-	LR8558-31PSA	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855831B	-	BL8558-31PSB	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855831B	-	LR8558-31PSB	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855832A	-	BL8558-32PSA	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855832A	-	LR8558-32PSA	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855832B	-	BL8558-32PSB	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855832B	-	LR8558-32PSB	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855833A	-	BL8558-33PSA	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855833A	-	LR8558-33PSA	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855833B	-	BL8558-33PSB	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855833B	-	LR8558-33PSB	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855834A	-	BL8558-34PSA	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855834A	-	LR8558-34PSA	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855834B	-	BL8558-34PSB	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855834B	-	LR8558-34PSB	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855835A	-	BL8558-35PSA	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855835A	-	LR8558-35PSA	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855835B	-	BL8558-35PSB	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855835B	-	LR8558-35PSB	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855836A	-	BL8558-36PSA	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855836A	-	LR8558-36PSA	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855836B	-	BL8558-36PSB	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855836B	-	LR8558-36PSB	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855837A	-	BL8558-37PSA	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855837A	-	LR8558-37PSA	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
855837B	-	BL8558-37PSB	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855837B	-	LR8558-37PSB	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855838A	-	BL8558-38PSA	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855838A	-	LR8558-38PSA	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855838B	-	BL8558-38PSB	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855838B	-	LR8558-38PSB	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855839A	-	BL8558-39PSA	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855839A	-	LR8558-39PSA	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855839B	-	BL8558-39PSB	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855839B	-	LR8558-39PSB	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855840A	-	BL8558-40PSA	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855840A	-	LR8558-40PSA	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855840B	-	BL8558-40PSB	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855840B	-	LR8558-40PSB	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855841A	-	BL8558-41PSA	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855841A	-	LR8558-41PSA	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855841B	-	BL8558-41PSB	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855841B	-	LR8558-41PSB	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855842A	-	BL8558-42PSA	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855842A	-	LR8558-42PSA	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855842B	-	BL8558-42PSB	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855842B	-	LR8558-42PSB	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855843A	-	BL8558-43PSA	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855843A	-	LR8558-43PSA	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855843B	-	BL8558-43PSB	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855843B	-	LR8558-43PSB	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855844A	-	BL8558-44PSA	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855844A	-	LR8558-44PSA	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855844B	-	BL8558-44PSB	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855844B	-	LR8558-44PSB	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
855845A	-	BL8558-45PSA	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-89	20ch	VR1	4mb	Shb
855845A	-	LR8558-45PSA	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-89	20ch	VR1	4mc	Lrc
855845B	-	BL8558-45PSB	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-89	20vl	VR1	4mb	Shb
855845B	-	LR8558-45PSB	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-89	20vl	VR1	4mc	Lrc
856	-	XC6701D37PR	LVR-IC	3.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
857	-	XC6701D38PR	LVR-IC	3.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
858	-	XC6701D39PR	LVR-IC	3.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
859	-	XC6701D40PR	LVR-IC	4.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85A	-	XC6701D41PR	LVR-IC	4.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85B	-	XC6701D42PR	LVR-IC	4.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85C	-	XC6701D43PR	LVR-IC	4.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85D	-	XC6701D44PR	LVR-IC	4.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85E	-	XC6701D45PR	LVR-IC	4.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85F	-	XC6701D46PR	LVR-IC	4.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85H	-	XC6701D47PR	LVR-IC	4.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85K	-	XC6701D48PR	LVR-IC	4.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85L	-	XC6701D49PR	LVR-IC	4.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85M	-	XC6701D50PR	LVR-IC	5.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85N	-	XC6701D51PR	LVR-IC	5.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85P	-	XC6701D52PR	LVR-IC	5.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85R	-	XC6701D53PR	LVR-IC	5.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85S	-	XC6701D54PR	LVR-IC	5.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85T	-	XC6701D55PR	LVR-IC	5.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85U	-	XC6701D56PR	LVR-IC	5.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85V	-	XC6701D57PR	LVR-IC	5.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85X	-	XC6701D58PR	LVR-IC	5.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85Y	-	XC6701D59PR	LVR-IC	5.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
85Z	-	XC6701D60PR	LVR-IC	6.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86	jn	ELM7546NAB	Vdet-IC	4.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
86	jo	ELM7546CAB	Vdet-IC	4.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
860	-	XC6701D61PR	LVR-IC	6.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
861	-	XC6701D62PR	LVR-IC	6.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
862	-	XC6701D63PR	LVR-IC	6.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
863	-	XC6701D64PR	LVR-IC	6.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
864	-	XC6701D65PR	LVR-IC	6.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
865	-	XC6701D66PR	LVR-IC	6.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
866	-	XC6701D67PR	LVR-IC	6.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
867	-	XC6701D68PR	LVR-IC	6.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
868	-	XC6701D69PR	LVR-IC	6.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
869	-	XC6701D70PR	LVR-IC	7.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
86A	-	XC6701D71PR	LVR-IC	7.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86B	-	XC6701D72PR	LVR-IC	7.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86C	-	XC6701D73PR	LVR-IC	7.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86D	-	XC6701D74PR	LVR-IC	7.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86E	-	XC6701D75PR	LVR-IC	7.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86F	-	XC6701D76PR	LVR-IC	7.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86H	-	XC6701D77PR	LVR-IC	7.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86K	-	XC6701D78PR	LVR-IC	7.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86L	-	XC6701D79PR	LVR-IC	7.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86M	-	XC6701D80PR	LVR-IC	8.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86N	-	XC6701D81PR	LVR-IC	8.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86P	-	XC6701D82PR	LVR-IC	8.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86R	-	XC6701D83PR	LVR-IC	8.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86S	-	XC6701D84PR	LVR-IC	8.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86T	-	XC6701D85PR	LVR-IC	8.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86U	-	XC6701D86PR	LVR-IC	8.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86V	-	XC6701D87PR	LVR-IC	8.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86X	-	XC6701D88PR	LVR-IC	8.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86Y	-	XC6701D89PR	LVR-IC	8.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
86Z	-	XC6701D90PR	LVR-IC	9.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87	jn	ELM7547NAB	Vdet-IC	4.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
87	jo	ELM7547CAB	Vdet-IC	4.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
870	-	XC6701D91PR	LVR-IC	9.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
871	-	XC6701D92PR	LVR-IC	9.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
872	-	XC6701D93PR	LVR-IC	9.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
873	-	XC6701D94PR	LVR-IC	9.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
874	-	XC6701D95PR	LVR-IC	9.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
875	-	XC6701D96PR	LVR-IC	9.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
876	-	XC6701D97PR	LVR-IC	9.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
877	-	XC6701D98PR	LVR-IC	9.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
878	-	XC6701D99PR	LVR-IC	9.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
879	-	XC6701DA0PR	LVR-IC	10.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87A	-	XC6701DA1PR	LVR-IC	10.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87B	-	XC6701DA2PR	LVR-IC	10.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87C	-	XC6701DA3PR	LVR-IC	10.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87D	-	XC6701DA4PR	LVR-IC	10.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87E	-	XC6701DA5PR	LVR-IC	10.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87F	-	XC6701DA6PR	LVR-IC	10.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87H	-	XC6701DA7PR	LVR-IC	10.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87K	-	XC6701DA8PR	LVR-IC	10.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87L	-	XC6701DA9PR	LVR-IC	10.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87M	-	XC6701DB0PR	LVR-IC	11.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87N	-	XC6701DB1PR	LVR-IC	11.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87P	-	XC6701DB2PR	LVR-IC	11.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87R	-	XC6701DB3PR	LVR-IC	11.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87S	-	XC6701DB4PR	LVR-IC	11.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87T	-	XC6701DB5PR	LVR-IC	11.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87U	-	XC6701DB6PR	LVR-IC	11.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87V	-	XC6701DB7PR	LVR-IC	11.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87X	-	XC6701DB8PR	LVR-IC	11.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87Y	-	XC6701DB9PR	LVR-IC	11.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
87Z	-	MCP1804T-C002I/MB	LVR-IC	LDO, 12.0V±2%, 150mA	SOT-89	20ch	VR1	4ra	Mcc
87Z	-	XC6701DC0PR	LVR-IC	12.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
88	jn	ELM7548NAB	Vdet-IC	4.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
88	jo	ELM7548CAB	Vdet-IC	4.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
882	-	2SD882PT-E	Si-npn	AF, Sw, 30V, 3A, B=250..500, 100MHz	SOT-89	20tb	-	4b	Chm
89	jn	ELM7549NAB	Vdet-IC	4.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
89	jo	ELM7549CAB	Vdet-IC	4.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
8A	-	HA178L02UA	LVR-IC	2.5V±5%, 150mA, 800mW	SOT-89	20ch	VR1	4e	Ren
8A	-	KIA78L05F	LVR-IC	5V±5%, 150mA	SOT-89	20ch	VR1	4a	Kec
8A	-	NJM78L02UA	LVR-IC	2.6V±5%, 100mA	SOT-89	20ch	VR1	4b	Njr
8B	-	HA178L05UA	LVR-IC	5V±5%, 150mA, 800mW	SOT-89	20ch	VR1	4e	Ren
8B	-	KIA78L06F	LVR-IC	6V±5%, 150mA	SOT-89	20ch	VR1	4a	Kec
8B	-	NJM78L03UA	LVR-IC	3V±5%, 100mA	SOT-89	20ch	VR1	4b	Njr
8B	-	RH5RL28AA	LVR-IC	2.8V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
8C	-	HA178L56UA	LVR-IC	5.6V±5%, 150mA, 800mW	SOT-89	20ch	VR1	4e	Ren
8C	-	NJM78L05UA	LVR-IC	5V±5%, 100mA	SOT-89	20ch	VR1	4b	Njr
8C	-	RH5RL38AA	LVR-IC	3.8V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
8C0	-	XC6701DC1PR	LVR-IC	12.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8C1	-	XC6701DC2PR	LVR-IC	12.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8C2	-	XC6701DC3PR	LVR-IC	12.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8C3	-	XC6701DC4PR	LVR-IC	12.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8C4	-	XC6701DC5PR	LVR-IC	12.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8C5	-	XC6701DC6PR	LVR-IC	12.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8C6	-	XC6701DC7PR	LVR-IC	12.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8C7	-	XC6701DC8PR	LVR-IC	12.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8C8	-	XC6701DC9PR	LVR-IC	12.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8C9	-	XC6701DD0PR	LVR-IC	13.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CA	-	XC6701DD1PR	LVR-IC	13.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CB	-	XC6701DD2PR	LVR-IC	13.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CC	-	XC6701DD3PR	LVR-IC	13.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CD	-	XC6701DD4PR	LVR-IC	13.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CE	-	XC6701DD5PR	LVR-IC	13.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CF	-	XC6701DD6PR	LVR-IC	13.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CH	-	XC6701DD7PR	LVR-IC	13.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CK	-	XC6701DD8PR	LVR-IC	13.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CL	-	XC6701DD9PR	LVR-IC	13.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CM	-	XC6701DE0PR	LVR-IC	14.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CN	-	XC6701DE1PR	LVR-IC	14.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CP	-	XC6701DE2PR	LVR-IC	14.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CR	-	XC6701DE3PR	LVR-IC	14.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CS	-	XC6701DE4PR	LVR-IC	14.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CT	-	XC6701DE5PR	LVR-IC	14.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CU	-	XC6701DE6PR	LVR-IC	14.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CV	-	XC6701DE7PR	LVR-IC	14.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CX	-	XC6701DE8PR	LVR-IC	14.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CY	-	XC6701DE9PR	LVR-IC	14.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8CZ	-	XC6701DF0PR	LVR-IC	15.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8D	-	HA178L06UA	LVR-IC	6V±5%, 150mA, 800mW	SOT-89	20ch	VR1	4e	Ren
8D	-	KIA78L08F	LVR-IC	8V±5%, 150mA	SOT-89	20ch	VR1	4a	Kec
8D	-	RH5RL48AA	LVR-IC	4.8V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
8D0	-	XC6701DF1PR	LVR-IC	15.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8D1	-	XC6701DF2PR	LVR-IC	15.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8D2	-	XC6701DF3PR	LVR-IC	15.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8D3	-	XC6701DF4PR	LVR-IC	15.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8D4	-	XC6701DF5PR	LVR-IC	15.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8D5	-	XC6701DF6PR	LVR-IC	15.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8D6	-	XC6701DF7PR	LVR-IC	15.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8D7	-	XC6701DF8PR	LVR-IC	15.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8D8	-	XC6701DF9PR	LVR-IC	15.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8D9	-	XC6701DG0PR	LVR-IC	16.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DA	-	XC6701DG1PR	LVR-IC	16.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DB	-	XC6701DG2PR	LVR-IC	16.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DC	-	XC6701DG3PR	LVR-IC	16.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DD	-	XC6701DG4PR	LVR-IC	16.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DE	-	XC6701DG5PR	LVR-IC	16.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DF	-	XC6701DG6PR	LVR-IC	16.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DH	-	XC6701DG7PR	LVR-IC	16.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DK	-	XC6701DG8PR	LVR-IC	16.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DL	-	XC6701DG9PR	LVR-IC	16.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DM	-	XC6701DH0PR	LVR-IC	17.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DN	-	XC6701DH1PR	LVR-IC	17.1V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DP	-	XC6701DH2PR	LVR-IC	17.2V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DR	-	XC6701DH3PR	LVR-IC	17.3V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DS	-	XC6701DH4PR	LVR-IC	17.4V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DT	-	XC6701DH5PR	LVR-IC	17.5V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DU	-	XC6701DH6PR	LVR-IC	17.6V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DV	-	XC6701DH7PR	LVR-IC	17.7V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DX	-	XC6701DH8PR	LVR-IC	17.8V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DY	-	XC6701DH9PR	LVR-IC	17.9V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8DZ	-	XC6701DJ0PR	LVR-IC	18.0V±2%, 150mA	SOT-89	20ch	VR1	4a	Tor
8E	-	HA178L08UA	LVR-IC	8V±5%, 150mA, 800mW	SOT-89	20ch	VR1	4e	Ren
8E	-	KIA78L09F	LVR-IC	9V±5%, 150mA	SOT-89	20ch	VR1	4a	Kec
8E	-	NJM78L06UA	LVR-IC	6V±5%, 100mA	SOT-89	20ch	VR1	4b	Njr
8E	-	RH5RL58AA	LVR-IC	5.8V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
8F	-	HA178L09UA	LVR-IC	9V±5%, 150mA, 800mW	SOT-89	20ch	VR1	4e	Ren
8F	-	KIA78L10F	LVR-IC	10V±5%, 150mA	SOT-89	20ch	VR1	4a	Kec
8F	-	NJM78L07UA	LVR-IC	7V±5%, 100mA	SOT-89	20ch	VR1	4b	Njr
8G	-	HA178L10UA	LVR-IC	10V±5%, 150mA, 800mW	SOT-89	20ch	VR1	4e	Ren
8G	-	KIA78L12F	LVR-IC	12V±5%, 150mA	SOT-89	20ch	VR1	4a	Kec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8G	-	NJM78L08UA	LVR-IC	8V±5%, 100mA	SOT-89	20ch	VR1	4b	Njr
8H	-	HA178L12UA	LVR-IC	12V±5%, 150mA, 800mW	SOT-89	20ch	VR1	4e	Ren
8H	-	NJM78L09UA	LVR-IC	9V±5%, 100mA	SOT-89	20ch	VR1	4b	Njr
8I	-	KIA78L15F	LVR-IC	15V±5%, 150mA	SOT-89	20ch	VR1	4a	Kec
8J	-	HA178L15UA	LVR-IC	15V±5%, 150mA, 800mW	SOT-89	20ch	VR1	4e	Ren
8J	-	KIA78L18F	LVR-IC	18V±5%, 150mA	SOT-89	20ch	VR1	4a	Kec
8J	-	NJM78L10UA	LVR-IC	10V±5%, 100mA	SOT-89	20ch	VR1	4b	Njr
8J	-	RH5RE28AA	LVR-IC	Ultra-LDO, 2.8V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
8K	-	KIA78L20F	LVR-IC	20V±5%, 150mA	SOT-89	20ch	VR1	4a	Kec
8K	-	NJM78L12UA	LVR-IC	12V±5%, 100mA	SOT-89	20ch	VR1	4b	Njr
8K	-	RH5RE38AA	LVR-IC	Ultra-LDO, 3.8V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
8L	-	KIA78L24F	LVR-IC	24V±5%, 150mA	SOT-89	20ch	VR1	4a	Kec
8L	-	NJM78L15UA	LVR-IC	15V±5%, 100mA	SOT-89	20ch	VR1	4b	Njr
8L	-	RH5RE48AA	LVR-IC	Ultra-LDO, 4.8V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
8M	-	NJM78L18UA	LVR-IC	18V±5%, 100mA	SOT-89	20ch	VR1	4b	Njr
8M	-	RH5RE58AA	LVR-IC	Ultra-LDO, 5.8V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
8N	-	NJM78L20UA	LVR-IC	20V±5%, 100mA	SOT-89	20ch	VR1	4b	Njr
8P	-	NJM78L24UA	LVR-IC	24V±5%, 100mA	SOT-89	20ch	VR1	4b	Njr
8Y2	-	BZV49-C8V2	Z-diode	8.2V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
8Z	-	NJM78L62UA	LVR-IC	6.2V±5%, 100mA	SOT-89	20ch	VR1	4b	Njr
9184D	-	G9184-120T21U	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-89	20ch	VR1	4g	Gmt
9301F	-	iDS930115A20	LVR-IC	LDO, 1.5V±2.0%, 400mA	SOT-89	20ch	VR1	4y	Ids
9301H	-	iDS930118A20	LVR-IC	LDO, 1.8V±2.0%, 400mA	SOT-89	20ch	VR1	4y	Ids
9301K	-	iDS930130A20	LVR-IC	LDO, 3.0V±2.0%, 400mA	SOT-89	20ch	VR1	4y	Ids
9301L	-	iDS930125A20	LVR-IC	LDO, 2.5V±2.0%, 400mA	SOT-89	20ch	VR1	4y	Ids
9301O	-	iDS930128A20	LVR-IC	LDO, 2.8V±2.0%, 400mA	SOT-89	20ch	VR1	4y	Ids
9301S	-	iDS930127A20	LVR-IC	LDO, 2.7V±2.0%, 400mA	SOT-89	20ch	VR1	4y	Ids
9301T	-	iDS930133A20	LVR-IC	LDO, 3.3V±2.0%, 400mA	SOT-89	20ch	VR1	4y	Ids
9301U	-	iDS9301285A20	LVR-IC	LDO, 2.85V±2.0%, 400mA	SOT-89	20ch	VR1	4y	Ids
9301V	-	iDS930131A20	LVR-IC	LDO, 3.1V±2.0%, 400mA	SOT-89	20ch	VR1	4y	Ids
9301X	-	iDS930132A20	LVR-IC	LDO, 3.2V±2.0%, 400mA	SOT-89	20ch	VR1	4y	Ids
9301Y	-	iDS930135A20	LVR-IC	LDO, 3.5V±2.0%, 400mA	SOT-89	20ch	VR1	4y	Ids
94	jn	ELM7514NAB	Vdet-IC	1.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
94	jo	ELM7514CAB	Vdet-IC	1.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
95	jn	ELM7515NAB	Vdet-IC	1.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
95	jo	ELM7515CAB	Vdet-IC	1.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
953	-	ZX5T953Z	Si-pnp	Lo-sat, 140V, 3.5A, 1.5W, 125MHz, B=100..300	SOT-89	20tb	-	4b	Zx
96	jn	ELM7516NAB	Vdet-IC	1.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
96	jo	ELM7516CAB	Vdet-IC	1.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
97	jn	ELM7517NAB	Vdet-IC	1.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
97	jo	ELM7517CAB	Vdet-IC	1.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
98	jn	ELM7518NAB	Vdet-IC	1.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
98	jo	ELM7518CAB	Vdet-IC	1.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
99	jn	ELM7519NAB	Vdet-IC	1.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
99	jo	ELM7519CAB	Vdet-IC	1.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
9A	-	KIA79L05F	LVR-IC	-5V±5%, 150mA	SOT-89	20vl	VR2	4a	Kec
9B	-	HA179L05U	LVR-IC	-5V±5%, 150mA, 800mW	SOT-89	20ch	VR2	4e	Ren
9B	-	KIA79L06F	LVR-IC	-6V±5%, 150mA	SOT-89	20vl	VR2	4a	Kec
9B	-	NJM79L03UA	LVR-IC	-3V±5%, 100mA	SOT-89	20vl	VR2	4b	Njr
9B	-	RH5RL29AA	LVR-IC	2.9V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
9C	-	NJM79L05UA	LVR-IC	-5V±5%, 100mA	SOT-89	20vl	VR2	4b	Njr
9C	-	RH5RL39AA	LVR-IC	3.9V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
9D	-	HA179L06U	LVR-IC	-6V±5%, 150mA, 800mW	SOT-89	20ch	VR2	4e	Ren
9D	-	KIA79L08F	LVR-IC	-8V±5%, 150mA	SOT-89	20vl	VR2	4a	Kec
9D	-	RH5RL49AA	LVR-IC	4.9V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
9E	-	HA179L08U	LVR-IC	-8V±5%, 150mA, 800mW	SOT-89	20ch	VR2	4e	Ren
9E	-	KIA79L09F	LVR-IC	-9V±5%, 150mA	SOT-89	20vl	VR2	4a	Kec
9E	-	NJM79L06UA	LVR-IC	-6V±5%, 100mA	SOT-89	20vl	VR2	4b	Njr
9E	-	RH5RL59AA	LVR-IC	5.9V±2.5%, 150mA	SOT-89	20vl	VR1	4c	Ric
9F	-	HA179L09U	LVR-IC	-9V±5%, 150mA, 800mW	SOT-89	20ch	VR2	4e	Ren
9F	-	KIA79L10F	LVR-IC	-10V±5%, 150mA	SOT-89	20vl	VR2	4a	Kec
9G	-	HA179L10U	LVR-IC	-10V±5%, 150mA, 800mW	SOT-89	20ch	VR2	4e	Ren
9G	-	KIA79L12F	LVR-IC	-12V±5%, 150mA	SOT-89	20vl	VR2	4a	Kec
9G	-	NJM79L08UA	LVR-IC	-8V±5%, 100mA	SOT-89	20vl	VR2	4b	Njr
9H	-	HA179L12U	LVR-IC	-12V±5%, 150mA, 800mW	SOT-89	20ch	VR2	4e	Ren
9H	-	NJM79L09UA	LVR-IC	-9V±5%, 100mA	SOT-89	20vl	VR2	4b	Njr
9I	-	KIA79L15F	LVR-IC	-15V±5%, 150mA	SOT-89	20vl	VR2	4a	Kec
9J	-	HA179L15U	LVR-IC	-15V±5%, 150mA, 800mW	SOT-89	20ch	VR2	4e	Ren
9J	-	KIA79L18F	LVR-IC	-18V±5%, 150mA	SOT-89	20vl	VR2	4a	Kec
9J	-	RH5RE29AA	LVR-IC	Ultra-LDO, 2.9V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9K	-	KIA79L20F	LVR-IC	-20V±5%, 150mA	SOT-89	20vl	VR2	4a	Kec
9K	-	NJM79L12UA	LVR-IC	-12±5%, 100mA	SOT-89	20vl	VR2	4b	Njr
9K	-	RH5RE39AA	LVR-IC	Ultra-LDO, 3.9V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
9L	-	KIA79L24F	LVR-IC	-24V±5%, 150mA	SOT-89	20vl	VR2	4a	Kec
9L	-	NJM79L15UA	LVR-IC	-15V±5%, 100mA	SOT-89	20vl	VR2	4b	Njr
9L	-	RH5RE49AA	LVR-IC	Ultra-LDO, 4.9V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
9M	-	NJM79L18UA	LVR-IC	-18V±5%, 100mA	SOT-89	20vl	VR2	4b	Njr
9M	-	RH5RE59AA	LVR-IC	Ultra-LDO, 5.9V±2.5%, 300mA	SOT-89	20vl	VR1	4c	Ric
9P	-	NJM79L24UA	LVR-IC	-24V± 5%, 100mA	SOT-89	20vl	VR2	4b	Njr
9Y1	-	BZV49-C9V1	Z-diode	9.1V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Phi
A	-	XMFP1-M3	n-FET	GaAs, UHF, 6V, 350mA, 1.2W, Idss=200mA(3V), 6GHz	SOT-89	20fh	-	4u	Mur
A	-	XMFP4-M4	n-FET	GaAs, UHF, 9V, 4A, 8W, Idss=2.8A(3V), 6GHz	SOT-89H	20fh	-	4u	Mur
A0	-	ELM89201A	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
A0	-	ELM9820AB	LVR-IC	2.0V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
A0	-	RT9162-33CX	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20ch	VR1	4g	Rct
A0-	-	RT9162-33PX	LVR-IC	LDO, 3.3V±2%, 300mA, Pb-free	SOT-89	20ch	VR1	4g	Rct
A09A	-	R3111H091A	Vdet-IC	0.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A09C	-	R3111H091C	Vdet-IC	0.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A1	-	D70G.05T1	Si-npn	Sw, 200/150V, 50mA	SOT-89	20tb	-	4b	Gen
A1	-	ELM89211A	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
A1	-	ELM9821AB	LVR-IC	2.1V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
A1	-	RT9162-35CX	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Rct
A1-	-	RT9162-35PX	LVR-IC	LDO, 3.5V±2%, 300mA, Pb-free	SOT-89	20ch	VR1	4g	Rct
A1000	-	WJA1000	MMIC	Gain-block, 50..1200MHz, 18.5dB (900MHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
A1001	-	WJA1001	MMIC	Gain-block, 50..3000MHz, 19dB (900MHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
A1005	-	WJA1005	MMIC	Gain-block, 50..1200MHz, 18dB (900MHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
A10A	-	R3111H101A	Vdet-IC	1V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A10C	-	R3111H101C	Vdet-IC	1V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A11A	-	ML6101C113P	Vdet-IC	1.1V±3%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A11A	-	R3111H111A	Vdet-IC	1.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A11C	-	R3111H111C	Vdet-IC	1.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A12A	-	ML6101C123P	Vdet-IC	1.2V±3%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A12A	-	R3111H121A	Vdet-IC	1.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A12C	-	R3111H121C	Vdet-IC	1.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A13A	-	ML6101C133P	Vdet-IC	1.3V±3%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A13A	-	R3111H131A	Vdet-IC	1.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A13C	-	R3111H131C	Vdet-IC	1.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A14A	-	ML6101C143P	Vdet-IC	1.4V±3%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A14A	-	R3111H141A	Vdet-IC	1.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A14C	-	R3111H141C	Vdet-IC	1.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A15	-	XC31PNS0015AP	LVR-IC	Temperature Sensitive, -T°factor, 1.5V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A15	-	XC31PPS0015AP	LVR-IC	Temperature Sensitive, +T°factor, 1.5V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A1510	-	WJA1510	MMIC	Gain-block, 50..1000MHz, 14dB (200MHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
A1515	-	WJA1515	MMIC	Gain-block, 50..1000MHz, 14dB (200MHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
A15A	-	ML6101C153P	Vdet-IC	1.5V±3%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A15A	-	R3111H151A	Vdet-IC	1.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A15C	-	R3111H151C	Vdet-IC	1.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A16	-	XC31PNS0016AP	LVR-IC	Temperature Sensitive, -T°factor, 1.6V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A16	-	XC31PPS0016AP	LVR-IC	Temperature Sensitive, +T°factor, 1.6V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A16A	-	ML6101C163P	Vdet-IC	1.6V±3%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A16A	-	R3111H161A	Vdet-IC	1.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A16C	-	R3111H161C	Vdet-IC	1.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A17	-	XC31PNS0017AP	LVR-IC	Temperature Sensitive, -T°factor, 1.7V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A17	-	XC31PPS0017AP	LVR-IC	Temperature Sensitive, +T°factor, 1.7V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A17A	-	ML6101C173P	Vdet-IC	1.7V±3%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A17A	-	R3111H171A	Vdet-IC	1.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A17C	-	R3111H171C	Vdet-IC	1.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A18	-	XC31PNS0018AP	LVR-IC	Temperature Sensitive, -T°factor, 1.8V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A18	-	XC31PPS0018AP	LVR-IC	Temperature Sensitive, +T°factor, 1.8V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A18A	-	ML6101C183P	Vdet-IC	1.8V±3%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A18A	-	R3111H181A	Vdet-IC	1.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A18C	-	R3111H181C	Vdet-IC	1.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A19	-	XC31PNS0019AP	LVR-IC	Temperature Sensitive, -T°factor, 1.9V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A19	-	XC31PPS0019AP	LVR-IC	Temperature Sensitive, +T°factor, 1.9V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A19A	-	ML6101C193P	Vdet-IC	1.9V±3%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A19A	-	R3111H191A	Vdet-IC	1.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A19C	-	R3111H191C	Vdet-IC	1.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A1E	-	LN2351P1512P	DC-DC-IC	PFM step-up, 1.5V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A1F	-	LN2351P1612P	DC-DC-IC	PFM step-up, 1.6V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A1H	-	LN2351P1712P	DC-DC-IC	PFM step-up, 1.7V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A1K	-	LN2351P1812P	DC-DC-IC	PFM step-up, 1.8V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A1L	-	LN2351P1912P	DC-DC-IC	PFM step-up, 1.9V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A1M	-	LN2351P2012P	DC-DC-IC	PFM st-up, 2.0V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A1N	-	LN2351P2112P	DC-DC-IC	PFM st-up, 2.1V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A1O	-	STB1132-O	Si-pnp	AF, 40V, 1A, 500mW, B=100..200, 150MHz	SOT-89	20tb	-	4b	Auk
A1P	-	LN2351P2212P	DC-DC-IC	PFM st-up, 2.2V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A1R	-	LN2351P2312P	DC-DC-IC	PFM st-up, 2.3V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A1S	-	LN2351P2412P	DC-DC-IC	PFM st-up, 2.4V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A1T	-	LN2351P2512P	DC-DC-IC	PFM st-up, 2.5V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A1U	-	LN2351P2612P	DC-DC-IC	PFM st-up, 2.6V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A1V	-	LN2351P2712P	DC-DC-IC	PFM st-up, 2.7V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A1X	-	LN2351P2812P	DC-DC-IC	PFM st-up, 2.8V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A1Y	-	LN2351P2912P	DC-DC-IC	PFM st-up, 2.9V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A1Y	-	STB1132-Y	Si-pnp	AF, 40V, 1A, 500mW, B=160..320, 150MHz	SOT-89	20tb	-	4b	Auk
A1Z	-	LN2351P3012P	DC-DC-IC	PFM st-up, 3.0V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2	-	ELM89221A	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
A2	-	ELM9822AB	LVR-IC	2.2V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
A2	-	KIC3201S-12	LVR-IC	LDO, 1.2V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
A2	-	RT9161-25CX	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
A2-	-	RT9161-25PX	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
A20	-	LN2351P3112P	DC-DC-IC	PFM st-up, 3.1V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A20	-	XC31PNS0020AP	LVR-IC	Temperature Sensitive, -T°factor, 2V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A20	-	XC31PPS0020AP	LVR-IC	Temperature Sensitive, +T°factor, 2V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A20	jb	XC6371A201P	DC-DC-IC	PWM step-up, 100kHz, 2.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A20A	-	ML6101C202P	Vdet-IC	2.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A20A	-	R3111H201A	Vdet-IC	2V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A20C	-	R3111H201C	Vdet-IC	2V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A21	-	LN2351P3212P	DC-DC-IC	PFM st-up, 3.2V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A21	-	XC31PNS0021AP	LVR-IC	Temperature Sensitive, -T°factor, 2.1V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A21	-	XC31PPS0021AP	LVR-IC	Temperature Sensitive, +T°factor, 2.1V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A21	jb	XC6371A211P	DC-DC-IC	PWM step-up, 100kHz, 2.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A21A	-	ML6101C212P	Vdet-IC	2.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A21A	-	R3111H211A	Vdet-IC	2.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A21C	-	R3111H211C	Vdet-IC	2.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A22	-	LN2351P3312P	DC-DC-IC	PFM st-up, 3.3V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A22	-	XC31PNS0022AP	LVR-IC	Temperature Sensitive, -T°factor, 2.2V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A22	-	XC31PPS0022AP	LVR-IC	Temperature Sensitive, +T°factor, 2.2V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A22	jb	XC6371A221P	DC-DC-IC	PWM step-up, 100kHz, 2.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A22A	-	ML6101C222P	Vdet-IC	2.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A22A	-	R3111H221A	Vdet-IC	2.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A22C	-	R3111H221C	Vdet-IC	2.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A23	-	LN2351P3412P	DC-DC-IC	PFM st-up, 3.4V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A23	-	XC31PNS0023AP	LVR-IC	Temperature Sensitive, -T°factor, 2.3V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A23	-	XC31PPS0023AP	LVR-IC	Temperature Sensitive, +T°factor, 2.3V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A23	jb	XC6371A231P	DC-DC-IC	PWM step-up, 100kHz, 2.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A23A	-	ML6101C232P	Vdet-IC	2.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A23A	-	R3111H231A	Vdet-IC	2.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A23C	-	R3111H231C	Vdet-IC	2.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A24	-	LN2351P3512P	DC-DC-IC	PFM st-up, 3.5V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A24	-	XC31PNS0024AP	LVR-IC	Temperature Sensitive, -T°factor, 2.4V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A24	-	XC31PPS0024AP	LVR-IC	Temperature Sensitive, +T°factor, 2.4V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A24	jb	XC6371A241P	DC-DC-IC	PWM step-up, 100kHz, 2.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A24A	-	ML6101C242P	Vdet-IC	2.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A24A	-	R3111H241A	Vdet-IC	2.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A24C	-	R3111H241C	Vdet-IC	2.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A25	-	LN2351P3612P	DC-DC-IC	PFM st-up, 3.6V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A25	-	XC31PNS0025AP	LVR-IC	Temperature Sensitive, -T°factor, 2.5V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A25	-	XC31PPS0025AP	LVR-IC	Temperature Sensitive, +T°factor, 2.5V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A25	jb	XC6371A251P	DC-DC-IC	PWM step-up, 100kHz, 2.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A25A	-	ML6101C252P	Vdet-IC	2.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A25A	-	R3111H251A	Vdet-IC	2.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A25C	-	R3111H251C	Vdet-IC	2.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A26	-	LN2351P3712P	DC-DC-IC	PFM st-up, 3.7V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A26	-	XC31PNS0026AP	LVR-IC	Temperature Sensitive, -T°factor, 2.6V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A26	-	XC31PPS0026AP	LVR-IC	Temperature Sensitive, +T°factor, 2.6V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A26	jb	XC6371A261P	DC-DC-IC	PWM step-up, 100kHz, 2.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A26A	-	ML6101C262P	Vdet-IC	2.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A26A	-	R3111H261A	Vdet-IC	2.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A26C	-	R3111H261C	Vdet-IC	2.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A27	-	LN2351P3812P	DC-DC-IC	PFM st-up, 3.8V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A27	-	PXTA27	Si-npn-Darl	GP, 60V, 500mA, 1.2W, B>10000, >125MHz	SOT-89	20tb	-	4b	Phi
A27	-	XC31PNS0027AP	LVR-IC	Temperature Sensitive, -T°factor, 2.7V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A27	-	XC31PPS0027AP	LVR-IC	Temperature Sensitive, +T°factor, 2.7V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A27	jb	XC6371A271P	DC-DC-IC	PWM step-up, 100kHz, 2.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A27A	-	ML6101C272P	Vdet-IC	2.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A27A	-	R3111H271A	Vdet-IC	2.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A27C	-	R3111H271C	Vdet-IC	2.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A28	-	LN2351P3912P	DC-DC-IC	PFM st-up, 3.9V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A28	-	XC31PNS0028AP	LVR-IC	Temperature Sensitive, -T°factor, 2.8V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A28	-	XC31PPS0028AP	LVR-IC	Temperature Sensitive, +T°factor, 2.8V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A28	jb	XC6371A281P	DC-DC-IC	PWM step-up, 100kHz, 2.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A28A	-	ML6101C282P	Vdet-IC	2.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A28A	-	R3111H281A	Vdet-IC	2.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A28C	-	R3111H281C	Vdet-IC	2.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A29	-	LN2351P4012P	DC-DC-IC	PFM st-up, 4.0V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A29	-	XC31PNS0029AP	LVR-IC	Temperature Sensitive, -T°factor, 2.9V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A29	-	XC31PPS0029AP	LVR-IC	Temperature Sensitive, +T°factor, 2.9V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A29	jb	XC6371A291P	DC-DC-IC	PWM step-up, 100kHz, 2.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A29A	-	ML6101C292P	Vdet-IC	2.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A29A	-	R3111H291A	Vdet-IC	2.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A29C	-	R3111H291C	Vdet-IC	2.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A2A	-	LN2351P4112P	DC-DC-IC	PFM st-up, 4.1V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2A	jb	XC6371A202P	DC-DC-IC	PWM step-up, 180kHz, 2.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A2B	-	LN2351P4212P	DC-DC-IC	PFM st-up, 4.2V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2B	jb	XC6371A212P	DC-DC-IC	PWM step-up, 180kHz, 2.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A2C	-	LN2351P4312P	DC-DC-IC	PFM st-up, 4.3V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2C	jb	XC6371A222P	DC-DC-IC	PWM step-up, 180kHz, 2.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A2D	-	LN2351P4412P	DC-DC-IC	PFM st-up, 4.4V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2D	jb	XC6371A232P	DC-DC-IC	PWM step-up, 180kHz, 2.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A2E	-	LN2351P4512P	DC-DC-IC	PFM st-up, 4.5V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2E	jb	XC6371A242P	DC-DC-IC	PWM step-up, 180kHz, 2.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A2F	-	LN2351P4612P	DC-DC-IC	PFM st-up, 4.6V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2F	jb	XC6371A252P	DC-DC-IC	PWM step-up, 180kHz, 2.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A2H	-	LN2351P4712P	DC-DC-IC	PFM st-up, 4.7V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2H	jb	XC6371A262P	DC-DC-IC	PWM step-up, 180kHz, 2.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A2K	-	LN2351P4812P	DC-DC-IC	PFM st-up, 4.8V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2K	jb	XC6371A272P	DC-DC-IC	PWM step-up, 180kHz, 2.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A2L	-	LN2351P4912P	DC-DC-IC	PFM st-up, 4.9V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2L	jb	XC6371A282P	DC-DC-IC	PWM step-up, 180kHz, 2.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A2M	-	LN2351P5012P	DC-DC-IC	PFM st-up, 5.0V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2M	jb	XC6371A292P	DC-DC-IC	PWM step-up, 180kHz, 2.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A2N	-	LN2351P5112P	DC-DC-IC	PFM st-up, 5.1V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2P	-	LN2351P5212P	DC-DC-IC	PFM st-up, 5.2V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2R	-	LN2351P5312P	DC-DC-IC	PFM st-up, 5.3V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2S	-	LN2351P5412P	DC-DC-IC	PFM st-up, 5.4V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2T	-	LN2351P5512P	DC-DC-IC	PFM st-up, 5.5V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2U	-	LN2351P5612P	DC-DC-IC	PFM st-up, 5.6V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2V	-	LN2351P5712P	DC-DC-IC	PFM st-up, 5.7V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2X	-	LN2351P5812P	DC-DC-IC	PFM st-up, 5.8V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2Y	-	LN2351P5912P	DC-DC-IC	PFM st-up, 5.9V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A2Z	-	LN2351P6012P	DC-DC-IC	PFM st-up, 6.0V±2%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Nln
A3	-	ELM89231A	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
A3	-	ELM9823AB	LVR-IC	2.3V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
A3	-	KIC3201S-13	LVR-IC	LDO, 1.3V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
A3	-	RT9161-33CX	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
A3-	-	RT9161-33PX	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
A30	-	TK11630U	LVR-IC	LDO, 3.0V±1.5%, 190mA	SOT-89	20hn	VR1	4d	Tok
A30	-	XC31PNS0030AP	LVR-IC	Temperature Sensitive, -T°factor, 3V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A30	-	XC31PPS0030AP	LVR-IC	Temperature Sensitive, +T°factor, 3V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A30	jb	XC6371A301P	DC-DC-IC	PWM step-up, 100kHz, 3.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A30A	-	ML6101C302P	Vdet-IC	3.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A30A	-	R3111H301A	Vdet-IC	3V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A30C	-	R3111H301C	Vdet-IC	3V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A31	-	XC31PNS0031AP	LVR-IC	Temperature Sensitive, -T°factor, 3.1V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A31	-	XC31PPS0031AP	LVR-IC	Temperature Sensitive, +T°factor, 3.1V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A31	jb	XC6371A311P	DC-DC-IC	PWM step-up, 100kHz, 3.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A31A	-	ML6101C312P	Vdet-IC	3.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A31A	-	R3111H311A	Vdet-IC	3.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A31C	-	R3111H311C	Vdet-IC	3.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A32	-	XC31PNS0032AP	LVR-IC	Temperature Sensitive, -T°factor, 3.2V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A32	-	XC31PPS0032AP	LVR-IC	Temperature Sensitive, +T°factor, 3.2V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A32	jb	XC6371A321P	DC-DC-IC	PWM step-up, 100kHz, 3.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A32A	-	ML6101C322P	Vdet-IC	3.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A32A	-	R3111H321A	Vdet-IC	3.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A32C	-	R3111H321C	Vdet-IC	3.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A33	-	TK11633U	LVR-IC	LDO, 3.3V±1.5%, 190mA	SOT-89	20hn	VR1	4d	Tok
A33	-	XC31PNS0033AP	LVR-IC	Temperature Sensitive, -T°factor, 3.3V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A33	-	XC31PPS0033AP	LVR-IC	Temperature Sensitive, +T°factor, 3.3V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A33	jb	XC6371A331P	DC-DC-IC	PWM step-up, 100kHz, 3.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A33A	-	ML6101C332P	Vdet-IC	3.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A33A	-	R3111H331A	Vdet-IC	3.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A33C	-	R3111H331C	Vdet-IC	3.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A34	-	XC31PNS0034AP	LVR-IC	Temperature Sensitive, -T°factor, 3.4V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A34	-	XC31PPS0034AP	LVR-IC	Temperature Sensitive, +T°factor, 3.4V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A34	jb	XC6371A341P	DC-DC-IC	PWM step-up, 100kHz, 3.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A34A	-	ML6101C342P	Vdet-IC	3.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A34A	-	R3111H341A	Vdet-IC	3.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A34C	-	R3111H341C	Vdet-IC	3.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A35	-	XC31PNS0035AP	LVR-IC	Temperature Sensitive, -T°factor, 3.5V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A35	-	XC31PPS0035AP	LVR-IC	Temperature Sensitive, +T°factor, 3.5V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A35	jb	XC6371A351P	DC-DC-IC	PWM step-up, 100kHz, 3.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A35A	-	ML6101C352P	Vdet-IC	3.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A35A	-	R3111H351A	Vdet-IC	3.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A35C	-	R3111H351C	Vdet-IC	3.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A36	-	XC31PNS0036AP	LVR-IC	Temperature Sensitive, -T°factor, 3.6V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A36	-	XC31PPS0036AP	LVR-IC	Temperature Sensitive, +T°factor, 3.6V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A36	jb	XC6371A361P	DC-DC-IC	PWM step-up, 100kHz, 3.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A36A	-	ML6101C362P	Vdet-IC	3.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A36A	-	R3111H361A	Vdet-IC	3.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A36C	-	R3111H361C	Vdet-IC	3.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A37	-	XC31PNS0037AP	LVR-IC	Temperature Sensitive, -T°factor, 3.7V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A37	-	XC31PPS0037AP	LVR-IC	Temperature Sensitive, +T°factor, 3.7V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A37	jb	XC6371A371P	DC-DC-IC	PWM step-up, 100kHz, 3.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A37A	-	ML6101C372P	Vdet-IC	3.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A37A	-	R3111H371A	Vdet-IC	3.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A37C	-	R3111H371C	Vdet-IC	3.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A38	-	XC31PNS0038AP	LVR-IC	Temperature Sensitive, -T°factor, 3.8V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A38	-	XC31PPS0038AP	LVR-IC	Temperature Sensitive, +T°factor, 3.8V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A38	jb	XC6371A381P	DC-DC-IC	PWM step-up, 100kHz, 3.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A38A	-	ML6101C382P	Vdet-IC	3.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A38A	-	R3111H381A	Vdet-IC	3.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A38C	-	R3111H381C	Vdet-IC	3.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A39	-	XC31PNS0039AP	LVR-IC	Temperature Sensitive, -T°factor, 3.9V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A39	-	XC31PPS0039AP	LVR-IC	Temperature Sensitive, +T°factor, 3.9V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A39	jb	XC6371A391P	DC-DC-IC	PWM step-up, 100kHz, 3.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A39A	-	ML6101C392P	Vdet-IC	3.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A39A	-	R3111H391A	Vdet-IC	3.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A39C	-	R3111H391C	Vdet-IC	3.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A3A	jb	XC6371A302P	DC-DC-IC	PWM step-up, 180kHz, 3.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A3B	jb	XC6371A312P	DC-DC-IC	PWM step-up, 180kHz, 3.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A3C	jb	XC6371A322P	DC-DC-IC	PWM step-up, 180kHz, 3.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A3D	jb	XC6371A332P	DC-DC-IC	PWM step-up, 180kHz, 3.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A3E	-	LN2351P1532P	DC-DC-IC	PFM step-up, 1.5V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A3E	jb	XC6371A342P	DC-DC-IC	PWM step-up, 180kHz, 3.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A3F	-	LN2351P1632P	DC-DC-IC	PFM step-up, 1.6V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A3F	jb	XC6371A352P	DC-DC-IC	PWM step-up, 180kHz, 3.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A3H	-	LN2351P1732P	DC-DC-IC	PFM step-up, 1.7V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A3H	jb	XC6371A362P	DC-DC-IC	PWM step-up, 180kHz, 3.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A3K	-	LN2351P1832P	DC-DC-IC	PFM step-up, 1.8V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A3K	jb	XC6371A372P	DC-DC-IC	PWM step-up, 180kHz, 3.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A3L	-	LN2351P1932P	DC-DC-IC	PFM step-up, 1.9V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A3L	jb	XC6371A382P	DC-DC-IC	PWM step-up, 180kHz, 3.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A3M	-	LN2351P2032P	DC-DC-IC	PFM st-up, 2.0V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A3M	jb	XC6371A392P	DC-DC-IC	PWM step-up, 180kHz, 3.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A3N	-	LN2351P2132P	DC-DC-IC	PFM st-up, 2.1V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A3P	-	LN2351P2232P	DC-DC-IC	PFM st-up, 2.2V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A3R	-	LN2351P2332P	DC-DC-IC	PFM st-up, 2.3V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A3S	-	LN2351P2432P	DC-DC-IC	PFM st-up, 2.4V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A3T	-	LN2351P2532P	DC-DC-IC	PFM st-up, 2.5V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A3U	-	LN2351P2632P	DC-DC-IC	PFM st-up, 2.6V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A3V	-	LN2351P2732P	DC-DC-IC	PFM st-up, 2.7V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A3X	-	LN2351P2832P	DC-DC-IC	PFM st-up, 2.8V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A3Y	-	LN2351P2932P	DC-DC-IC	PFM st-up, 2.9V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A3Z	-	LN2351P3032P	DC-DC-IC	PFM st-up, 3.0V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4	-	AP431Y	Vref-IC	Adjustable, Precision, Shunt, 2.495V±1%	SOT-89-3L	20rb	RF1	4b	Ana
A4	-	ELM89241A	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
A4	-	ELM9824AB	LVR-IC	2.4V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
A4	-	KIC3201S-14	LVR-IC	LDO, 1.4V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
A4	-	RT9161-35CX	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
A40	-	LN2351P3132P	DC-DC-IC	PFM st-up, 3.1V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A40	-	XC31PNS0040AP	LVR-IC	Temperature Sensitive, -T°factor, 4V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A40	-	XC31PPS0040AP	LVR-IC	Temperature Sensitive, +T°factor, 4V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A40	jb	XC6371A401P	DC-DC-IC	PWM step-up, 100kHz, 4.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A402G	-	AG402-89G	MMIC	Buff/amp, DC..6GHz, 15dB (900MHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
A403G	-	AG403-89G	MMIC	Buff/amp, DC..6GHz, 20.5dB (900MHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
A40A	-	ML6101C402P	Vdet-IC	4.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A40A	-	R3111H401A	Vdet-IC	4V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A40C	-	R3111H401C	Vdet-IC	4V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A41	-	LN2351P3232P	DC-DC-IC	PFM st-up, 3.2V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A41	-	XC31PNS0041AP	LVR-IC	Temperature Sensitive, -T°factor, 4.1V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A41	-	XC31PPS0041AP	LVR-IC	Temperature Sensitive, +T°factor, 4.1V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A41	jb	XC6371A411P	DC-DC-IC	PWM step-up, 100kHz, 4.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A41A	-	ML6101C412P	Vdet-IC	4.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A41A	-	R3111H411A	Vdet-IC	4.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A41C	-	R3111H411C	Vdet-IC	4.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A42	-	LN2351P3332P	DC-DC-IC	PFM st-up, 3.3V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A42	-	XC31PNS0042AP	LVR-IC	Temperature Sensitive, -T°factor, 4.2V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A42	-	XC31PPS0042AP	LVR-IC	Temperature Sensitive, +T°factor, 4.2V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A42	jb	XC6371A421P	DC-DC-IC	PWM step-up, 100kHz, 4.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A42A	-	ML6101C422P	Vdet-IC	4.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A42A	-	MXTA42-A	Si-npn	HV-Vid, 300V, 500mA, 500mW, B=80..100, >50MHz	SOT-89	20tb	-	4b	Wtr
A42A	-	R3111H421A	Vdet-IC	4.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A42B1	-	MXTA42-B1	Si-npn	HV-Vid, 300V, 500mA, 500mW, B=100..150, >50MHz	SOT-89	20tb	-	4b	Wtr
A42B2	-	MXTA42-B2	Si-npn	HV-Vid, 300V, 500mA, 500mW, B=150..200, >50MHz	SOT-89	20tb	-	4b	Wtr
A42C	-	MXTA42-C	Si-npn	HV-Vid, 300V, 500mA, 500mW, B=200..250, >50MHz	SOT-89	20tb	-	4b	Wtr
A42C	-	R3111H421C	Vdet-IC	4.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A43	-	LN2351P3432P	DC-DC-IC	PFM st-up, 3.4V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A43	-	XC31PNS0043AP	LVR-IC	Temperature Sensitive, -T°factor, 4.3V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A43	-	XC31PPS0043AP	LVR-IC	Temperature Sensitive, +T°factor, 4.3V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A43	jb	XC6371A431P	DC-DC-IC	PWM step-up, 100kHz, 4.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A43A	-	ML6101C432P	Vdet-IC	4.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A43A	-	R3111H431A	Vdet-IC	4.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A43C	-	R3111H431C	Vdet-IC	4.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A44	-	LN2351P3532P	DC-DC-IC	PFM st-up, 3.5V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A44	-	XC31PNS0044AP	LVR-IC	Temperature Sensitive, -T°factor, 4.4V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A44	-	XC31PPS0044AP	LVR-IC	Temperature Sensitive, +T°factor, 4.4V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A44	jb	XC6371A441P	DC-DC-IC	PWM step-up, 100kHz, 4.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A44A	-	ML6101C442P	Vdet-IC	4.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A44A	-	R3111H441A	Vdet-IC	4.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A44C	-	R3111H441C	Vdet-IC	4.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A45	-	LN2351P3632P	DC-DC-IC	PFM st-up, 3.6V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A45	-	XC31PNS0045AP	LVR-IC	Temperature Sensitive, -T°factor, 4.5V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A45	-	XC31PPS0045AP	LVR-IC	Temperature Sensitive, +T°factor, 4.5V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A45	jb	XC6371A451P	DC-DC-IC	PWM step-up, 100kHz, 4.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A45A	-	ML6101C452P	Vdet-IC	4.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A45A	-	R3111H451A	Vdet-IC	4.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A45C	-	R3111H451C	Vdet-IC	4.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A46	-	LN2351P3732P	DC-DC-IC	PFM st-up, 3.7V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A46	-	XC31PNS0046AP	LVR-IC	Temperature Sensitive, -T°factor, 4.6V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A46	-	XC31PPS0046AP	LVR-IC	Temperature Sensitive, +T°factor, 4.6V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A46	jb	XC6371A461P	DC-DC-IC	PWM step-up, 100kHz, 4.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A46A	-	ML6101C462P	Vdet-IC	4.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A46A	-	R3111H461A	Vdet-IC	4.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A46C	-	R3111H461C	Vdet-IC	4.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A47	-	LN2351P3832P	DC-DC-IC	PFM st-up, 3.8V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A47	-	XC31PNS0047AP	LVR-IC	Temperature Sensitive, -T°factor, 4.7V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A47	-	XC31PPS0047AP	LVR-IC	Temperature Sensitive, +T°factor, 4.7V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A47	jb	XC6371A471P	DC-DC-IC	PWM step-up, 100kHz, 4.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A47A	-	ML6101C472P	Vdet-IC	4.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A47A	-	R3111H471A	Vdet-IC	4.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A47C	-	R3111H471C	Vdet-IC	4.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A48	-	LN2351P3932P	DC-DC-IC	PFM st-up, 3.9V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A48	-	XC31PNS0048AP	LVR-IC	Temperature Sensitive, -T°factor, 4.8V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A48	-	XC31PPS0048AP	LVR-IC	Temperature Sensitive, +T°factor, 4.8V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A48	jb	XC6371A481P	DC-DC-IC	PWM step-up, 100kHz, 4.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A48A	-	ML6101C482P	Vdet-IC	4.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A48A	-	R3111H481A	Vdet-IC	4.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A48C	-	R3111H481C	Vdet-IC	4.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A49	-	LN2351P4032P	DC-DC-IC	PFM st-up, 4.0V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A49	-	XC31PNS0049AP	LVR-IC	Temperature Sensitive, -T°factor, 4.9V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A49	-	XC31PPS0049AP	LVR-IC	Temperature Sensitive, +T°factor, 4.9V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A49	jb	XC6371A491P	DC-DC-IC	PWM step-up, 100kHz, 4.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A49A	-	ML6101C492P	Vdet-IC	4.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A49A	-	R3111H491A	Vdet-IC	4.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A49C	-	R3111H491C	Vdet-IC	4.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A4A	-	LN2351P4132P	DC-DC-IC	PFM st-up, 4.1V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4A	jb	XC6371A402P	DC-DC-IC	PWM step-up, 180kHz, 4.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A4B	-	LN2351P4232P	DC-DC-IC	PFM st-up, 4.2V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4B	jb	XC6371A412P	DC-DC-IC	PWM step-up, 180kHz, 4.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A4C	-	LN2351P4332P	DC-DC-IC	PFM st-up, 4.3V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4C	jb	XC6371A422P	DC-DC-IC	PWM step-up, 180kHz, 4.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A4D	-	LN2351P4432P	DC-DC-IC	PFM st-up, 4.4V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4D	jb	XC6371A432P	DC-DC-IC	PWM step-up, 180kHz, 4.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A4E	-	LN2351P4532P	DC-DC-IC	PFM st-up, 4.5V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4E	jb	XC6371A442P	DC-DC-IC	PWM step-up, 180kHz, 4.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A4F	-	LN2351P4632P	DC-DC-IC	PFM st-up, 4.6V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4F	jb	XC6371A452P	DC-DC-IC	PWM step-up, 180kHz, 4.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A4H	-	LN2351P4732P	DC-DC-IC	PFM st-up, 4.7V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4H	jb	XC6371A462P	DC-DC-IC	PWM step-up, 180kHz, 4.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A4K	-	LN2351P4832P	DC-DC-IC	PFM st-up, 4.8V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4K	jb	XC6371A472P	DC-DC-IC	PWM step-up, 180kHz, 4.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A4L	-	LN2351P4932P	DC-DC-IC	PFM st-up, 4.9V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4L	jb	XC6371A482P	DC-DC-IC	PWM step-up, 180kHz, 4.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A4M	-	LN2351P5032P	DC-DC-IC	PFM st-up, 5.0V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4M	jb	XC6371A492P	DC-DC-IC	PWM step-up, 180kHz, 4.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A4N	-	LN2351P5132P	DC-DC-IC	PFM st-up, 5.1V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4P	-	LN2351P5232P	DC-DC-IC	PFM st-up, 5.2V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4R	-	LN2351P5332P	DC-DC-IC	PFM st-up, 5.3V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4S	-	LN2351P5432P	DC-DC-IC	PFM st-up, 5.4V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4T	-	LN2351P5532P	DC-DC-IC	PFM st-up, 5.5V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4U	-	LN2351P5632P	DC-DC-IC	PFM st-up, 5.6V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4V	-	LN2351P5732P	DC-DC-IC	PFM st-up, 5.7V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4X	-	LN2351P5832P	DC-DC-IC	PFM st-up, 5.8V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4Y	-	LN2351P5932P	DC-DC-IC	PFM st-up, 5.9V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A4Z	-	LN2351P6032P	DC-DC-IC	PFM st-up, 6.0V±2%, 400mA, 180kHz	SOT-89	20bq	DC2	4h	Nln
A5	-	AP431AY	Vref-IC	Adjustable, Precision, Shunt, 2.495V±0.5%	SOT-89-3L	20rb	RF1	4b	Ana
A5	-	ELM89251A	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
A5	-	ELM9825AB	LVR-IC	2.5V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
A5	-	KIC3201S-15	LVR-IC	LDO, 1.5V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
A5	-	RT9161-37CX	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
A50	-	TK11650U	LVR-IC	LDO, 5.0V±1.5%, 190mA	SOT-89	20hn	VR1	4d	Tok
A50	-	XC31PNS0050AP	LVR-IC	Temperature Sensitive, -T°factor, 5V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A50	-	XC31PPS0050AP	LVR-IC	Temperature Sensitive, +T°factor, 5V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A50	jb	XC6371A501P	DC-DC-IC	PWM step-up, 100kHz, 5.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A503G	-	AG503-89G	MMIC	Buff/amp, DC..4GHz, 21.5dB (900MHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
A50A	-	ML6101C502P	Vdet-IC	5.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A50A	-	R3111H501A	Vdet-IC	5V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A50C	-	R3111H501C	Vdet-IC	5V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A51	-	XC31PNS0051AP	LVR-IC	Temperature Sensitive, -T°factor, 5.1V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A51	-	XC31PPS0051AP	LVR-IC	Temperature Sensitive, +T°factor, 5.1V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A51	jb	XC6371A511P	DC-DC-IC	PWM step-up, 100kHz, 5.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A51A	-	ML6101C512P	Vdet-IC	5.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A51A	-	R3111H511A	Vdet-IC	5.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A51C	-	R3111H511C	Vdet-IC	5.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A52	-	XC31PNS0052AP	LVR-IC	Temperature Sensitive, -T°factor, 5.2V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A52	-	XC31PPS0052AP	LVR-IC	Temperature Sensitive, +T°factor, 5.2V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A52	jb	XC6371A521P	DC-DC-IC	PWM step-up, 100kHz, 5.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A52A	-	ML6101C522P	Vdet-IC	5.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A52A	-	R3111H521A	Vdet-IC	5.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A52C	-	R3111H521C	Vdet-IC	5.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A53	-	XC31PNS0053AP	LVR-IC	Temperature Sensitive, -T°factor, 5.3V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A53	-	XC31PPS0053AP	LVR-IC	Temperature Sensitive, +T°factor, 5.3V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A53	jb	XC6371A531P	DC-DC-IC	PWM step-up, 100kHz, 5.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A53A	-	ML6101C532P	Vdet-IC	5.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A53A	-	R3111H531A	Vdet-IC	5.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A53C	-	R3111H531C	Vdet-IC	5.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A54	-	XC31PNS0054AP	LVR-IC	Temperature Sensitive, -T°factor, 5.4V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A54	-	XC31PPS0054AP	LVR-IC	Temperature Sensitive, +T°factor, 5.4V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A54	jb	XC6371A541P	DC-DC-IC	PWM step-up, 100kHz, 5.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A54A	-	ML6101C542P	Vdet-IC	5.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A54A	-	R3111H541A	Vdet-IC	5.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A54C	-	R3111H541C	Vdet-IC	5.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A55	-	XC31PNS0055AP	LVR-IC	Temperature Sensitive, -T°factor, 5.5V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A55	-	XC31PPS0055AP	LVR-IC	Temperature Sensitive, +T°factor, 5.5V±5%, 50mA	SOT-89	20vl	VR1	4h	Tor
A55	jb	XC6371A551P	DC-DC-IC	PWM step-up, 100kHz, 5.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A55A	-	ML6101C552P	Vdet-IC	5.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A55A	-	R3111H551A	Vdet-IC	5.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A55C	-	R3111H551C	Vdet-IC	5.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A56	jb	XC6371A561P	DC-DC-IC	PWM step-up, 100kHz, 5.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A56A	-	ML6101C562P	Vdet-IC	5.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A56A	-	R3111H561A	Vdet-IC	5.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A56C	-	R3111H561C	Vdet-IC	5.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A57	jb	XC6371A571P	DC-DC-IC	PWM step-up, 100kHz, 5.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A57A	-	ML6101C572P	Vdet-IC	5.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A57A	-	R3111H571A	Vdet-IC	5.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A57C	-	R3111H571C	Vdet-IC	5.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A58	jb	XC6371A581P	DC-DC-IC	PWM step-up, 100kHz, 5.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A58A	-	ML6101C582P	Vdet-IC	5.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A58A	-	R3111H581A	Vdet-IC	5.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A58C	-	R3111H581C	Vdet-IC	5.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A59	jb	XC6371A591P	DC-DC-IC	PWM step-up, 100kHz, 5.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A59A	-	ML6101C592P	Vdet-IC	5.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A59A	-	R3111H591A	Vdet-IC	5.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A59C	-	R3111H591C	Vdet-IC	5.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A5A	jb	XC6371A502P	DC-DC-IC	PWM step-up, 180kHz, 5.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A5B	jb	XC6371A512P	DC-DC-IC	PWM step-up, 180kHz, 5.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A5C	jb	XC6371A522P	DC-DC-IC	PWM step-up, 180kHz, 5.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A5D	jb	XC6371A532P	DC-DC-IC	PWM step-up, 180kHz, 5.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A5E	-	LN2351P1552P	DC-DC-IC	PFM step-up, 1.5V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A5E	jb	XC6371A542P	DC-DC-IC	PWM step-up, 180kHz, 5.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A5F	-	LN2351P1652P	DC-DC-IC	PFM step-up, 1.6V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A5F	jb	XC6371A552P	DC-DC-IC	PWM step-up, 180kHz, 5.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A5H	-	LN2351P1752P	DC-DC-IC	PFM step-up, 1.7V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A5H	jb	XC6371A562P	DC-DC-IC	PWM step-up, 180kHz, 5.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A5K	-	LN2351P1852P	DC-DC-IC	PFM step-up, 1.8V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A5K	jb	XC6371A572P	DC-DC-IC	PWM step-up, 180kHz, 5.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A5L	-	LN2351P1952P	DC-DC-IC	PFM step-up, 1.9V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A5L	jb	XC6371A582P	DC-DC-IC	PWM step-up, 180kHz, 5.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A5M	-	LN2351P2052P	DC-DC-IC	PFM st-up, 2.0V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A5M	jb	XC6371A592P	DC-DC-IC	PWM step-up, 180kHz, 5.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A5N	-	LN2351P2152P	DC-DC-IC	PFM st-up, 2.1V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A5P	-	LN2351P2252P	DC-DC-IC	PFM st-up, 2.2V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A5R	-	LN2351P2352P	DC-DC-IC	PFM st-up, 2.3V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A5S	-	LN2351P2452P	DC-DC-IC	PFM st-up, 2.4V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A5T	-	LN2351P2552P	DC-DC-IC	PFM st-up, 2.5V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A5U	-	LN2351P2652P	DC-DC-IC	PFM st-up, 2.6V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A5V	-	LN2351P2752P	DC-DC-IC	PFM st-up, 2.7V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A5X	-	LN2351P2852P	DC-DC-IC	PFM st-up, 2.8V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A5Y	-	LN2351P2952P	DC-DC-IC	PFM st-up, 2.9V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A5Z	-	LN2351P3052P	DC-DC-IC	PFM st-up, 3.0V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6	-	ELM89261A	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
A6	-	ELM9826AB	LVR-IC	2.6V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
A6	-	KIC3201S-16	LVR-IC	LDO, 1.6V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
A6	-	RT9161-39CX	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
A6-	-	RT9161-39PX	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
A60	-	LN2351P3152P	DC-DC-IC	PFM st-up, 3.1V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A60	jb	XC6371A601P	DC-DC-IC	PWM step-up, 100kHz, 6.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A602G	-	AG602-89G	MMIC	Buff/amp, DC..3.5GHz, 14dB (900MHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
A603G	-	AG603-89G	MMIC	Buff/amp, DC..3GHz, 18.5dB (900MHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
A604G	-	AG604-89G	MMIC	Buff/amp, DC..2/7GHz, 21dB (900MHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A60A	-	ML6101C602P	Vdet-IC	6.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4g	Mlc
A60A	-	R3111H601A	Vdet-IC	6V±2%, -Reset PPO	SOT-89	20vda	VD7	4c	Ric
A60C	-	R3111H601C	Vdet-IC	6V±2%, -Reset ODO	SOT-89	20vda	VD6	4c	Ric
A61	-	LN2351P3252P	DC-DC-IC	PFM st-up, 3.2V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A61	jb	XC6371A611P	DC-DC-IC	PWM step-up, 100kHz, 6.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A62	-	LN2351P3352P	DC-DC-IC	PFM st-up, 3.3V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A62	jb	XC6371A621P	DC-DC-IC	PWM step-up, 100kHz, 6.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A63	-	LN2351P3452P	DC-DC-IC	PFM st-up, 3.4V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A63	jb	XC6371A631P	DC-DC-IC	PWM step-up, 100kHz, 6.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A64	-	LN2351P3552P	DC-DC-IC	PFM st-up, 3.5V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A64	jb	XC6371A641P	DC-DC-IC	PWM step-up, 100kHz, 6.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A65	-	LN2351P3652P	DC-DC-IC	PFM st-up, 3.6V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A65	jb	XC6371A651P	DC-DC-IC	PWM step-up, 100kHz, 6.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A66	-	LN2351P3752P	DC-DC-IC	PFM st-up, 3.7V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A66	jb	XC6371A661P	DC-DC-IC	PWM step-up, 100kHz, 6.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A67	-	LN2351P3852P	DC-DC-IC	PFM st-up, 3.8V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A67	jb	XC6371A671P	DC-DC-IC	PWM step-up, 100kHz, 6.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A68	-	LN2351P3952P	DC-DC-IC	PFM st-up, 3.9V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A68	jb	XC6371A681P	DC-DC-IC	PWM step-up, 100kHz, 6.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A69	-	LN2351P4052P	DC-DC-IC	PFM st-up, 4.0V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A69	jb	XC6371A691P	DC-DC-IC	PWM step-up, 100kHz, 6.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A6A	-	LN2351P4152P	DC-DC-IC	PFM st-up, 4.1V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6A	jb	XC6371A602P	DC-DC-IC	PWM step-up, 180kHz, 6.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A6B	-	LN2351P4252P	DC-DC-IC	PFM st-up, 4.2V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6B	jb	XC6371A612P	DC-DC-IC	PWM step-up, 180kHz, 6.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A6C	-	LN2351P4352P	DC-DC-IC	PFM st-up, 4.3V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6C	jb	XC6371A622P	DC-DC-IC	PWM step-up, 180kHz, 6.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A6D	-	LN2351P4452P	DC-DC-IC	PFM st-up, 4.4V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6D	jb	XC6371A632P	DC-DC-IC	PWM step-up, 180kHz, 6.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A6E	-	LN2351P4552P	DC-DC-IC	PFM st-up, 4.5V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6E	jb	XC6371A642P	DC-DC-IC	PWM step-up, 180kHz, 6.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A6F	-	LN2351P4652P	DC-DC-IC	PFM st-up, 4.6V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6F	jb	XC6371A652P	DC-DC-IC	PWM step-up, 180kHz, 6.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A6H	-	LN2351P4752P	DC-DC-IC	PFM st-up, 4.7V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6H	jb	XC6371A662P	DC-DC-IC	PWM step-up, 180kHz, 6.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A6K	-	LN2351P4852P	DC-DC-IC	PFM st-up, 4.8V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6K	jb	XC6371A672P	DC-DC-IC	PWM step-up, 180kHz, 6.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A6L	-	LN2351P4952P	DC-DC-IC	PFM st-up, 4.9V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6L	jb	XC6371A682P	DC-DC-IC	PWM step-up, 180kHz, 6.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A6M	-	LN2351P5052P	DC-DC-IC	PFM st-up, 5.0V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6M	jb	XC6371A692P	DC-DC-IC	PWM step-up, 180kHz, 6.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A6N	-	LN2351P5152P	DC-DC-IC	PFM st-up, 5.1V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6P	-	LN2351P5252P	DC-DC-IC	PFM st-up, 5.2V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6R	-	LN2351P5352P	DC-DC-IC	PFM st-up, 5.3V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6S	-	LN2351P5452P	DC-DC-IC	PFM st-up, 5.4V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6T	-	LN2351P5552P	DC-DC-IC	PFM st-up, 5.5V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6U	-	LN2351P5652P	DC-DC-IC	PFM st-up, 5.6V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6V	-	LN2351P5752P	DC-DC-IC	PFM st-up, 5.7V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6X	-	LN2351P5852P	DC-DC-IC	PFM st-up, 5.8V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6Y	-	LN2351P5952P	DC-DC-IC	PFM st-up, 5.9V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A6Z	-	LN2351P6052P	DC-DC-IC	PFM st-up, 6.0V±2%, 400mA, 300kHz	SOT-89	20bq	DC2	4h	Nln
A7	-	ELM89271A	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
A7	-	ELM9827AB	LVR-IC	2.7V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
A7	-	KIC3201S-17	LVR-IC	LDO, 1.7V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
A7	-	RT9161-40CX	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
A7-	-	RT9161-40PX	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
A70	jb	XC6371A701P	DC-DC-IC	PWM step-up, 100kHz, 7.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A7A	jb	XC6371A702P	DC-DC-IC	PWM step-up, 180kHz, 7.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
A8	-	ELM89281A	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
A8	-	ELM9828AB	LVR-IC	2.8V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
A8	-	KIC3201S-18	LVR-IC	LDO, 1.8V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
A8	-	RT9163-33CX	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20ch	VR1	4g	Rct
A8-	-	RT9163-33PX	LVR-IC	LDO, 3.3V±2%, 500mA, Pb-free	SOT-89	20ch	VR1	4g	Rct
A83	-	XC61CC0802P	Vdet-IC	0.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
A8500BAA21	-	AME8500BEFTAA21	Vdet-IC	2.1V±1.5%, -Reset PPO, 1.5ms	SOT-89	20vda	VD7	4o	Ame
A8500BAA21	jh	AME8500BEFTAA21Z	Vdet-IC	2.1V±1.5%, -Reset PPO, 1.5ms, lead free	SOT-89	20vda	VD7	4o	Ame
A8500BAA27	-	AME8500BEFTAA27	Vdet-IC	2.7V±1.5%, -Reset PPO, 1.5ms	SOT-89	20vda	VD7	4o	Ame
A8500BAA27	jh	AME8500BEFTAA27Z	Vdet-IC	2.7V±1.5%, -Reset PPO, 1.5ms, lead free	SOT-89	20vda	VD7	4o	Ame
A8500BAF27	-	AME8500BEFTAF27	Vdet-IC	2.7V±1.5%, -Reset PPO, 210ms	SOT-89	20vda	VD7	4o	Ame
A8500BAF27	jh	AME8500BEFTAF27Z	Vdet-IC	2.7V±1.5%, -Reset PPO, 210ms, lead free	SOT-89	20vda	VD7	4o	Ame



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A8500BAF40	-	AME8500BEFTAF40	Vdet-IC	4V±1.5%, -Reset PPO, 210ms	SOT-89	20vda	VD7	4o	Ame
A8500BAF40	jh	AME8500BEFTAF40Z	Vdet-IC	4V±1.5%, -Reset PPO, 210ms, lead free	SOT-89	20vda	VD7	4o	Ame
A8500BBA23	-	AME8500BEFTBA23	Vdet-IC	2.32V±1.5%, -Reset ODO, 1.5ms	SOT-89	20vda	VD7	4o	Ame
A8500BBA23	jh	AME8500BEFTBA23Z	Vdet-IC	2.32V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-89	20vda	VD7	4o	Ame
A8500BBA24	-	AME8500BEFTBA24	Vdet-IC	2.40V±1.5%, -Reset ODO, 1.5ms	SOT-89	20vda	VD7	4o	Ame
A8500BBA24	jh	AME8500BEFTBA24Z	Vdet-IC	2.40V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-89	20vda	VD7	4o	Ame
A8500CBA27	-	AME8500CEFTBA27	Vdet-IC	2.7V±1.5%, -Reset ODO, 1.5ms	SOT-89	20vda	VD6	4o	Ame
A8500CBA27	jh	AME8500CEFTBA27Z	Vdet-IC	2.7V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-89	20vda	VD6	4o	Ame
A8500CBA29	-	AME8500CEFTBA29	Vdet-IC	2.93V±1.5%, -Reset ODO, 1.5ms	SOT-89	20vda	VD6	4o	Ame
A8500CBA29	jh	AME8500CEFTBA29Z	Vdet-IC	2.93V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-89	20vda	VD6	4o	Ame
A8500CBA42	-	AME8500CEFTBA42	Vdet-IC	4.2V±1.5%, -Reset ODO, 1.5ms	SOT-89	20vda	VD6	4o	Ame
A8500CBA42	jh	AME8500CEFTBA42Z	Vdet-IC	4.2V±1.5%, -Reset ODO, 1.5ms, lead free	SOT-89	20vda	VD6	4o	Ame
A8500CCD28	-	AME8500CEFTCD28	Vdet-IC	2.8V±1.5%, +Reset PPO, 30ms	SOT-89	20vda	VD7	4o	Ame
A8500CCD28	jh	AME8500CEFTCD28Z	Vdet-IC	2.8V±1.5%, +Reset PPO, 30ms, lead free	SOT-89	20vda	VD7	4o	Ame
A8500CCD46	-	AME8500CEFTCD46	Vdet-IC	4.63V±1.5%, +Reset PPO, 30ms	SOT-89	20vda	VD7	4o	Ame
A8500CCD46	jh	AME8500CEFTCD46Z	Vdet-IC	4.63V±1.5%, +Reset PPO, 30ms, lead free	SOT-89	20vda	VD7	4o	Ame
A8550AA220	-	AME8550AEFTA220Z	Vdet-IC	2.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Ame
A8550AA220	jh	AME8550AEFTA220L	Vdet-IC	2.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Ame
A8550AA240	-	AME8550AEFTA240Z	Vdet-IC	2.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Ame
A8550AA240	jh	AME8550AEFTA240L	Vdet-IC	2.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Ame
A8550AA270	-	AME8550AEFTA270Z	Vdet-IC	2.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Ame
A8550AA270	jh	AME8550AEFTA270L	Vdet-IC	2.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Ame
A8550AA300	-	AME8550AEFTA300Z	Vdet-IC	3.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Ame
A8550AA300	jh	AME8550AEFTA300L	Vdet-IC	3.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Ame
A8550AA500	-	AME8550AEFTA500Z	Vdet-IC	5.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Ame
A8550AA500	jh	AME8550AEFTA500L	Vdet-IC	5.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4o	Ame
A8550AB210	-	AME8550AEFTB210Z	Vdet-IC	2.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Ame
A8550AB210	jh	AME8550AEFTB210L	Vdet-IC	2.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Ame
A8550AB220	-	AME8550AEFTB220Z	Vdet-IC	2.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Ame
A8550AB220	jh	AME8550AEFTB220L	Vdet-IC	2.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Ame
A8550AB240	-	AME8550AEFTB240Z	Vdet-IC	2.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Ame
A8550AB240	jh	AME8550AEFTB240L	Vdet-IC	2.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Ame
A8550AB250	-	AME8550AEFTB250Z	Vdet-IC	2.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Ame
A8550AB250	jh	AME8550AEFTB250L	Vdet-IC	2.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Ame
A8550AB270	-	AME8550AEFTB270Z	Vdet-IC	2.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Ame
A8550AB270	jh	AME8550AEFTB270L	Vdet-IC	2.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Ame
A8550AB280	-	AME8550AEFTB280Z	Vdet-IC	2.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Ame
A8550AB280	jh	AME8550AEFTB280L	Vdet-IC	2.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Ame
A8550AB340	-	AME8550AEFTB340Z	Vdet-IC	3.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Ame
A8550AB340	jh	AME8550AEFTB340L	Vdet-IC	3.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Ame
A8550AB440	-	AME8550AEFTB440Z	Vdet-IC	4.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Ame
A8550AB440	jh	AME8550AEFTB440L	Vdet-IC	4.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4o	Ame
A88001EF	-	AME88001EFT	LVR-IC	LDO, 1.3V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A88001EF	jh	AME88001EFTZ	LVR-IC	LDO, 1.3V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A88002EF	-	AME88002EFT	LVR-IC	LDO, 2.0V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A88002EF	jh	AME88002EFTZ	LVR-IC	LDO, 2.0V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A88003EF	-	AME88003EFT	LVR-IC	LDO, 4.2V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A88003EF	jh	AME88003EFTZ	LVR-IC	LDO, 4.2V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A88004EF	-	AME88004EFT	LVR-IC	LDO, 4.0V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A88004EF	jh	AME88004EFTZ	LVR-IC	LDO, 4.0V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800AEF	-	AME8800AEFT	LVR-IC	LDO, 3.3V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800AEF	jh	AME8800AEFTZ	LVR-IC	LDO, 3.3V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800BEF	-	AME8800BEFT	LVR-IC	LDO, 3.0V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800BEF	jh	AME8800BEFTZ	LVR-IC	LDO, 3.0V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800CEF	-	AME8800CEFT	LVR-IC	LDO, 2.8V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800CEF	jh	AME8800CEFTZ	LVR-IC	LDO, 2.8V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800DEF	-	AME8800DEFT	LVR-IC	LDO, 2.5V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800DEF	jh	AME8800DEFTZ	LVR-IC	LDO, 2.5V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800EEF	-	AME8800EEFT	LVR-IC	LDO, 3.8V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800EEF	jh	AME8800EEFTZ	LVR-IC	LDO, 3.8V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800FEF	-	AME8800FEFT	LVR-IC	LDO, 3.6V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800FEF	jh	AME8800FEFTZ	LVR-IC	LDO, 3.6V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800GEF	-	AME8800GEFT	LVR-IC	LDO, 3.5V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800GEF	jh	AME8800GEFTZ	LVR-IC	LDO, 3.5V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800HEF	-	AME8800HEFT	LVR-IC	LDO, 2.7V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800HEF	jh	AME8800HEFTZ	LVR-IC	LDO, 2.7V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800IEF	-	AME8800IEFT	LVR-IC	LDO, 3.4V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800IEF	jh	AME8800IEFTZ	LVR-IC	LDO, 3.4V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800JEF	-	AME8800JEFT	LVR-IC	LDO, 2.85V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800JEF	jh	AME8800JEFTZ	LVR-IC	LDO, 2.85V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A8800KEF	-	AME8800KEFT	LVR-IC	LDO, 3.7V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800KEF	jh	AME8800KEFTZ	LVR-IC	LDO, 3.7V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800LEF	-	AME8800LEFT	LVR-IC	LDO, 1.5V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800LEF	jh	AME8800LEFTZ	LVR-IC	LDO, 1.5V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800MEF	-	AME8800MEFT	LVR-IC	LDO, 1.8V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800MEF	jh	AME8800MEFTZ	LVR-IC	LDO, 1.8V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800NEF	-	AME8800NEFT	LVR-IC	LDO, 2.9V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800NEF	jh	AME8800NEFTZ	LVR-IC	LDO, 2.9V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800OEF	-	AME8800OEFT	LVR-IC	LDO, 3.1V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800OEF	jh	AME8800OEFTZ	LVR-IC	LDO, 3.1V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800SEF	-	AME8800SEFT	LVR-IC	LDO, 5.0V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800SEF	jh	AME8800SEFTZ	LVR-IC	LDO, 5.0V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800WEF	-	AME8800WEFT	LVR-IC	LDO, 2.3V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800WEF	jh	AME8800WEFTZ	LVR-IC	LDO, 2.3V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8800ZEF	-	AME8800ZEFT	LVR-IC	LDO, 1.7V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8800ZEF	jh	AME8800ZEFTZ	LVR-IC	LDO, 1.7V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A88052EF	-	AME88052EFT	LVR-IC	LDO, 2.0V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A88052EF	jh	AME88052EFTZ	LVR-IC	LDO, 2.0V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8805AEF	-	AME8805AEFT	LVR-IC	LDO, 3.3V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805AEF	jh	AME8805AEFTZ	LVR-IC	LDO, 3.3V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8805BEF	-	AME8805BEFT	LVR-IC	LDO, 3.0V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805BEF	jh	AME8805BEFTZ	LVR-IC	LDO, 3.0V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8805CEF	-	AME8805CEFT	LVR-IC	LDO, 2.8V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805CEF	jh	AME8805CEFTZ	LVR-IC	LDO, 2.8V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8805DEF	-	AME8805DEFT	LVR-IC	LDO, 2.5V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805DEF	jh	AME8805DEFTZ	LVR-IC	LDO, 2.5V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8805EEF	-	AME8805EEFT	LVR-IC	LDO, 3.8V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805EEF	jh	AME8805EEFTZ	LVR-IC	LDO, 3.8V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8805FEF	-	AME8805FEFT	LVR-IC	LDO, 3.6V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805FEF	jh	AME8805FEFTZ	LVR-IC	LDO, 3.6V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8805GEF	-	AME8805GEFT	LVR-IC	LDO, 3.5V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805GEF	jh	AME8805GEFTZ	LVR-IC	LDO, 3.5V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8805HEF	-	AME8805HEFT	LVR-IC	LDO, 2.7V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805HEF	jh	AME8805HEFTZ	LVR-IC	LDO, 2.7V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8805IEF	-	AME8805IEFT	LVR-IC	LDO, 3.4V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805IEF	jh	AME8805IEFTZ	LVR-IC	LDO, 3.4V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8805JEF	-	AME8805JEFT	LVR-IC	LDO, 2.85V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805JEF	jh	AME8805JEFTZ	LVR-IC	LDO, 2.85V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8805KEF	-	AME8805KEFT	LVR-IC	LDO, 3.7V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805KEF	jh	AME8805KEFTZ	LVR-IC	LDO, 3.7V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8805LEF	-	AME8805LEFT	LVR-IC	LDO, 1.5V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805LEF	jh	AME8805LEFTZ	LVR-IC	LDO, 1.5V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8805MEF	-	AME8805MEFT	LVR-IC	LDO, 1.8V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805MEF	jh	AME8805MEFTZ	LVR-IC	LDO, 1.8V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8805NEF	-	AME8805NEFT	LVR-IC	LDO, 2.9V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805NEF	jh	AME8805NEFTZ	LVR-IC	LDO, 2.9V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8805OEF	-	AME8805OEFT	LVR-IC	LDO, 3.1V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805OEF	jh	AME8805OEFTZ	LVR-IC	LDO, 3.1V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8805SEF	-	AME8805SEFTZ	LVR-IC	LDO, 5.0V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805YEF	-	AME8805YEFT	LVR-IC	LDO, 1.9V±1.5%, 600mA	SOT-89	20vl	VR1	4qa	Ame
A8805YEF	jh	AME8805YEFTZ	LVR-IC	LDO, 1.9V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8811AEF	-	AME8811AEFT	LVR-IC	LDO, 3.3V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8811AEF	jh	AME8811AEFTZ	LVR-IC	LDO, 3.3V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8811BEF	-	AME8811BEFT	LVR-IC	LDO, 3.0V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8811BEF	jh	AME8811BEFTZ	LVR-IC	LDO, 3.0V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8811CEF	-	AME8811CEFT	LVR-IC	LDO, 2.8V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8811CEF	jh	AME8811CEFTZ	LVR-IC	LDO, 2.8V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8811DEF	-	AME8811DEFT	LVR-IC	LDO, 2.5V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8811DEF	jh	AME8811DEFTZ	LVR-IC	LDO, 2.5V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8811EEF	-	AME8811EEFT	LVR-IC	LDO, 3.8V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8811EEF	jh	AME8811EEFTZ	LVR-IC	LDO, 3.8V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8811FEF	-	AME8811FEFT	LVR-IC	LDO, 3.6V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8811FEF	jh	AME8811FEFTZ	LVR-IC	LDO, 3.6V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8811GEF	-	AME8811GEFT	LVR-IC	LDO, 3.5V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8811GEF	jh	AME8811GEFTZ	LVR-IC	LDO, 3.5V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8811HEF	-	AME8811HEFT	LVR-IC	LDO, 2.7V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8811HEF	jh	AME8811HEFTZ	LVR-IC	LDO, 2.7V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8811IEF	-	AME8811IEFT	LVR-IC	LDO, 3.4V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8811IEF	jh	AME8811IEFTZ	LVR-IC	LDO, 3.4V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8811JEF	-	AME8811JEFT	LVR-IC	LDO, 2.85V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A8811JEF	jh	AME8811JEFTZ	LVR-IC	LDO, 2.85V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8811KEF	-	AME8811KEFT	LVR-IC	LDO, 3.7V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8811KEF	jh	AME8811KEFTZ	LVR-IC	LDO, 3.7V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8811LEF	-	AME8811LEFT	LVR-IC	LDO, 1.5V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8811LEF	jh	AME8811LEFTZ	LVR-IC	LDO, 1.5V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8811MEF	-	AME8811MEFT	LVR-IC	LDO, 1.8V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8811MEF	jh	AME8811MEFTZ	LVR-IC	LDO, 1.8V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8811NEF	-	AME8811NEFT	LVR-IC	LDO, 2.9V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8811NEF	jh	AME8811NEFTZ	LVR-IC	LDO, 2.9V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8811OEF	-	AME8811OEFT	LVR-IC	LDO, 3.1V±1.5%, 300mA	SOT-89	20vl	VR1	4qa	Ame
A8811OEF	jh	AME8811OEFTZ	LVR-IC	LDO, 3.1V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8811SEF	jh	AME8811SEFTZ	LVR-IC	LDO, 5.0V±1.5%, 300mA	SOT-89	20vl	VR1	4o	Ame
A8813AEF	jh	AME8813AEFTZ	LVR-IC	LDO, 3.3V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8813DEF	jh	AME8813DEFTZ	LVR-IC	LDO, 2.5V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8813SEF	jh	AME8813SEFTZ	LVR-IC	LDO, 5.0V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8819CB	jh	AME8819AEFT330Z	LVR-IC	LDO, 3.3V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8819CD	jh	AME8819AEFT300Z	LVR-IC	LDO, 3.0V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8819CG	jh	AME8819AEFT250Z	LVR-IC	LDO, 2.5V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8819CI	jh	AME8819AEFT180Z	LVR-IC	LDO, 1.8V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8819CJ	jh	AME8819AEFT150Z	LVR-IC	LDO, 1.5V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8819CK	jh	AME8819AEFT120Z	LVR-IC	LDO, 1.2V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8819DA	jh	AME8819BEFT360Z	LVR-IC	LDO, 3.6V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8819DB	jh	AME8819BEFT330Z	LVR-IC	LDO, 3.3V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8819DD	jh	AME8819BEFT300Z	LVR-IC	LDO, 3.0V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8819DG	jh	AME8819BEFT250Z	LVR-IC	LDO, 2.5V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8819DI	jh	AME8819BEFT180Z	LVR-IC	LDO, 1.8V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8819DJ	jh	AME8819BEFT150Z	LVR-IC	LDO, 1.5V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8819DK	jh	AME8819BEFT120Z	LVR-IC	LDO, 1.2V±1.5%, 600mA	SOT-89	20vl	VR1	4o	Ame
A8847A18	jh	AME8847AEFT180Z	LVR-IC	LDO, 1.8V±1.5%, 800mA	SOT-89	20vl	VR1	4o	Ame
A8847A25	jh	AME8847AEFT250Z	LVR-IC	LDO, 2.5V±1.5%, 800mA	SOT-89	20vl	VR1	4o	Ame
A8847A33	jh	AME8847AEFT330Z	LVR-IC	LDO, 3.3V±1.5%, 800mA	SOT-89	20vl	VR1	4o	Ame
A9	-	ELM89291A	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
A9	-	ELM9709NAB	Vdet-IC	0.9V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
A9	-	ELM9829AB	LVR-IC	2.9V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
A9	-	KIC3201S-19	LVR-IC	LDO, 1.9V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
A9	-	RT9163-35CX	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20ch	VR1	4g	Rct
A90	-	TK11690U	LVR-IC	LDO, 9V±1.5%, 190mA	SOT-89	20hn	VR1	4d	Tok
A93	-	XC61CC0902P	Vdet-IC	0.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
AA	-	2SD1366A	Si-npn	AF, 25V, 1A, 1W, B=85.170, 240MHz	SOT-89	20tb	-	4b	Ren
AA	-	AP431IY	Vref-IC	Adjustable, Precision, Shunt, 2.495V±1%	SOT-89-3L	20rb	RF1	4b	Ana
AA	-	BCX51	Si-pnp	AF, 45V, 1A, 1W, B=40..250, >100MHz	SOT-89	20tb	-	4b	Phi
AA	-	ELM99201B	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
AA	-	RT9161-28CX	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AA-	-	RT9161-28PX	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AA1	-	2SC4942-1	Si-npn	Sw, Hi-sp, HV, 600V, 1A, 2W, 30MHz, B=30..60	SOT-89	20tb	-	4b	Nec
AA12	-	LC1203CC3TR12	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA13	-	LC1203CC3TR13	LVR-IC	LDO, 1.3V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA14	-	LC1203CC3TR14	LVR-IC	LDO, 1.4V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA15	-	LC1203CC3TR15	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA16	-	LC1203CC3TR16	LVR-IC	LDO, 1.6V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA17	-	LC1203CC3TR17	LVR-IC	LDO, 1.7V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA18	-	LC1203CC3TR18	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA19	-	LC1203CC3TR19	LVR-IC	LDO, 1.9V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA2	-	2SC4942-2	Si-npn	Sw, Hi-sp, HV, 600V, 1A, 2W, 30MHz, B=40..80	SOT-89	20tb	-	4b	Nec
AA20	-	LC1203CC3TR20	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA21	-	LC1203CC3TR21	LVR-IC	LDO, 2.1V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA22	-	LC1203CC3TR22	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA23	-	LC1203CC3TR23	LVR-IC	LDO, 2.3V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA24	-	LC1203CC3TR24	LVR-IC	LDO, 2.4V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA25	-	LC1203CC3TR25	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA26	-	LC1203CC3TR26	LVR-IC	LDO, 2.6V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA27	-	LC1203CC3TR27	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA28	-	LC1203CC3TR28	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA29	-	LC1203CC3TR29	LVR-IC	LDO, 2.9V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA3	-	2SC4942-3	Si-npn	Sw, Hi-sp, HV, 600V, 1A, 2W, 30MHz, B=60..120	SOT-89	20tb	-	4b	Nec
AA30	-	LC1203CC3TR30	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA31	-	LC1203CC3TR31	LVR-IC	LDO, 3.1V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA32	-	LC1203CC3TR32	LVR-IC	LDO, 3.2V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA33	-	LC1203CC3TR33	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA34	-	LC1203CC3TR34	LVR-IC	LDO, 3.4V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AA35	-	LC1203CC3TR35	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA36	-	LC1203CC3TR36	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA37	-	LC1203CC3TR37	LVR-IC	LDO, 3.7V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA38	-	LC1203CC3TR38	LVR-IC	LDO, 3.8V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA39	-	LC1203CC3TR39	LVR-IC	LDO, 3.9V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA40	-	LC1203CC3TR40	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA41	-	LC1203CC3TR41	LVR-IC	LDO, 4.1V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA42	-	LC1203CC3TR42	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA43	-	LC1203CC3TR43	LVR-IC	LDO, 4.3V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA44	-	LC1203CC3TR44	LVR-IC	LDO, 4.4V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA45	-	LC1203CC3TR45	LVR-IC	LDO, 4.5V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA46	-	LC1203CC3TR46	LVR-IC	LDO, 4.6V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA47	-	LC1203CC3TR47	LVR-IC	LDO, 4.7V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA48	-	LC1203CC3TR48	LVR-IC	LDO, 4.8V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA49	-	LC1203CC3TR49	LVR-IC	LDO, 4.9V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA50	-	LC1203CC3TR50	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA51	-	LC1203CC3TR51	LVR-IC	LDO, 5.1V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA52	-	LC1203CC3TR52	LVR-IC	LDO, 5.2V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA53	-	LC1203CC3TR53	LVR-IC	LDO, 5.3V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA54	-	LC1203CC3TR54	LVR-IC	LDO, 5.4V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA55	-	LC1203CC3TR55	LVR-IC	LDO, 5.5V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA56	-	LC1203CC3TR56	LVR-IC	LDO, 5.6V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA57	-	LC1203CC3TR57	LVR-IC	LDO, 5.7V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA58	-	LC1203CC3TR58	LVR-IC	LDO, 5.8V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA59	-	LC1203CC3TR59	LVR-IC	LDO, 5.9V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AA60	-	LC1203CC3TR60	LVR-IC	LDO, 6.0V±2%, 250mA	SOT-89	20vl	VR1	4bb	Lch
AAA21	-	AME8500AEFTAA21	Vdet-IC	2.1V±1.5%, -Reset PPO, 1.5ms	SOT-89	20vde	VD7	4b	Ame
AAA21	jj	AME8500AEFTAA21Z	Vdet-IC	2.1V±1.5%, -Reset PPO, 1.5ms, lead free	SOT-89	20vde	VD7	4b	Ame
AAE	-	2SA1946-E	Si-pnp	Relay-Drv, 25V, 700mA, 500mW, B=150..300, 180MHz	SOT-89	20tb	-	4a	Mit
AAF	-	2SA1946-F	Si-pnp	Relay-Drv, 25V, 700mA, 500mW, B=250..500, 180MHz	SOT-89	20tb	-	4a	Mit
AAF27	-	AME8500AEFTAF27	Vdet-IC	2.7V±1.5%, -Reset PPO, 210ms	SOT-89	20vde	VD7	4b	Ame
AAF27	jj	AME8500AEFTAF27Z	Vdet-IC	2.7V±1.5%, -Reset PPO, 210ms, lead free	SOT-89	20vde	VD7	4b	Ame
AAG	-	2SA1946-G	Si-pnp	Relay-Drv, 25V, 700mA, 500mW, B=400..800, 180MHz	SOT-89	20tb	-	4a	Mit
AAR	jg	2SA1415-R	Si-pnp	Sw, 180V, 200mA, 500mW, B=100..200, >150MHz	PCP	20tb	-	4a	San
AAS	jg	2SA1415-S	Si-pnp	Sw, 180V, 200mA, 500mW, B=140..280, >150MHz	PCP	20tb	-	4a	San
AAT	jg	2SA1415-T	Si-pnp	Sw, 180V, 200mA, 500mW, B=200..400, >150MHz	PCP	20tb	-	4a	San
AB	-	2SD1366A-B	Si-npn	AF, 25V, 1A, 1W, B=120..240, 240MHz	SOT-89	20tb	-	4b	Ren
AB	-	AP431IAY	Vref-IC	Adjustable, Precision, Shunt, 2.495V±0.5%	SOT-89-3L	20rb	RF1	4b	Ana
AB	-	BCX51-06	Si-pnp	AF, 45V, 1A, 1W, B=40..100, >100MHz	SOT-89	20tb	-	4b	Inf
AB	-	ELM99211B	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
AB	-	RT9161-38CX	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AB1	-	2SD2425-1	Si-npn	Sw, 50V, 5A, 600/800ns, B=50..100	SOT-89	20tb	-	4b	Nec
AB2	-	2SD2425-2	Si-npn	Sw, 50V, 5A, 600/800ns, B=75..150	SOT-89	20tb	-	4b	Nec
AB3	-	2SD2425-3	Si-npn	Sw, 50V, 5A, 600/800ns, B=100..200	SOT-89	20tb	-	4b	Nec
ABC	-	2SA1947-C	Si-pnp	AF, 30, 1A, 500mW, B=55..110, 100MHz	SOT-89	20tb	-	4a	Mit
ABD	-	2SA1947-D	Si-pnp	AF, 30, 1A, 500mW, B=90..180, 100MHz	SOT-89	20tb	-	4a	Mit
ABE	-	2SA1947-E	Si-pnp	AF, 30, 1A, 500mW, B=150..300, 100MHz	SOT-89	20tb	-	4a	Mit
ABR	-	2SA1416-R	Si-pnp	HV, Sw, 120V, 1A, 500mW, B=100..200, 120MHz	PCP	20tb	-	4a	San
ABS	-	2SA1416-S	Si-pnp	HV, Sw, 120V, 1A, 500mW, B=140..280, 120MHz	PCP	20tb	-	4a	San
ABT	-	2SA1416-T	Si-pnp	HV, Sw, 120V, 1A, 500mW, B=200..400, 120MHz	PCP	20tb	-	4a	San
AC	-	2SA1690	Si-pnp	Sw, 400V, 100mA, 2W, B=56..270	SOT-89	20tb	-	4b	Rhm
AC	-	2SD1366A-C	Si-npn	AF, 30V, 1A, 1W, B=85..170, 240MHz	SOT-89	20tb	-	4b	Ren
AC	-	BCX51-10	Si-pnp	AF, 45V, 1A, 1W, B=63..160, >100MHz	SOT-89	20tb	-	4b	Phi
AC	-	ELM99221B	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
AC	-	RT9161-42CX	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AC	-	RXT2907A	Si-pnp	AF, Drv, 60V, 600mA, 1W, B=100..300, 200MHz	SOT-89	20tb	-	4b	Rhm
AC0	jb	XC6371A200P	DC-DC-IC	PWM step-up, 50kHz, 2.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC0	jd	XC6373A200P	DC-DC-IC	PWM step-up, 30kHz, 2.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC1	jb	XC6371A210P	DC-DC-IC	PWM step-up, 50kHz, 2.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC1	jd	XC6373A210P	DC-DC-IC	PWM step-up, 30kHz, 2.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC15	-	LC1253CC3TR15	LVR-IC	LDO, 1.5V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC16	-	LC1253CC3TR16	LVR-IC	LDO, 1.6V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC17	-	LC1253CC3TR17	LVR-IC	LDO, 1.7V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC18	-	LC1253CC3TR18	LVR-IC	LDO, 1.8V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC19	-	LC1253CC3TR19	LVR-IC	LDO, 1.9V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC2	jb	XC6371A220P	DC-DC-IC	PWM step-up, 50kHz, 2.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC2	jd	XC6373A220P	DC-DC-IC	PWM step-up, 30kHz, 2.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC20	-	LC1253CC3TR20	LVR-IC	LDO, 2.0V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC21	-	LC1253CC3TR21	LVR-IC	LDO, 2.1V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC22	-	LC1253CC3TR22	LVR-IC	LDO, 2.2V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AC23	-	LC1253CC3TR23	LVR-IC	LDO, 2.3V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC24	-	LC1253CC3TR24	LVR-IC	LDO, 2.4V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC25	-	LC1253CC3TR25	LVR-IC	LDO, 2.5V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC26	-	LC1253CC3TR26	LVR-IC	LDO, 2.6V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC27	-	LC1253CC3TR27	LVR-IC	LDO, 2.7V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC28	-	LC1253CC3TR28	LVR-IC	LDO, 2.8V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC29	-	LC1253CC3TR29	LVR-IC	LDO, 2.9V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC3	jb	XC6371A230P	DC-DC-IC	PWM step-up, 50kHz, 2.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC3	jd	XC6373A230P	DC-DC-IC	PWM step-up, 30kHz, 2.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC30	-	LC1253CC3TR30	LVR-IC	LDO, 3.0V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC31	-	LC1253CC3TR31	LVR-IC	LDO, 3.1V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC32	-	LC1253CC3TR32	LVR-IC	LDO, 3.2V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC33	-	LC1253CC3TR33	LVR-IC	LDO, 3.3V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC34	-	LC1253CC3TR34	LVR-IC	LDO, 3.4V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC35	-	LC1253CC3TR35	LVR-IC	LDO, 3.5V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC36	-	LC1253CC3TR36	LVR-IC	LDO, 3.6V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC37	-	LC1253CC3TR37	LVR-IC	LDO, 3.7V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC38	-	LC1253CC3TR38	LVR-IC	LDO, 3.8V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC39	-	LC1253CC3TR39	LVR-IC	LDO, 3.9V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC4	jb	XC6371A240P	DC-DC-IC	PWM step-up, 50kHz, 2.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC4	jd	XC6373A240P	DC-DC-IC	PWM step-up, 30kHz, 2.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC40	-	LC1253CC3TR40	LVR-IC	LDO, 4.0V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC41	-	LC1253CC3TR41	LVR-IC	LDO, 4.1V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC42	-	LC1253CC3TR42	LVR-IC	LDO, 4.2V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC43	-	LC1253CC3TR43	LVR-IC	LDO, 4.3V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC44	-	LC1253CC3TR44	LVR-IC	LDO, 4.4V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC45	-	LC1253CC3TR45	LVR-IC	LDO, 4.5V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC46	-	LC1253CC3TR46	LVR-IC	LDO, 4.6V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC47	-	LC1253CC3TR47	LVR-IC	LDO, 4.7V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC48	-	LC1253CC3TR48	LVR-IC	LDO, 4.8V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC49	-	LC1253CC3TR49	LVR-IC	LDO, 4.9V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC5	jb	XC6371A250P	DC-DC-IC	PWM step-up, 50kHz, 2.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC5	jd	XC6373A250P	DC-DC-IC	PWM step-up, 30kHz, 2.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC50	-	LC1253CC3TR50	LVR-IC	LDO, 5.0V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC51	-	LC1253CC3TR51	LVR-IC	LDO, 5.1V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC52	-	LC1253CC3TR52	LVR-IC	LDO, 5.2V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC53	-	LC1253CC3TR53	LVR-IC	LDO, 5.3V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC54	-	LC1253CC3TR54	LVR-IC	LDO, 5.4V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC55	-	LC1253CC3TR55	LVR-IC	LDO, 5.5V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC56	-	LC1253CC3TR56	LVR-IC	LDO, 5.6V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC57	-	LC1253CC3TR57	LVR-IC	LDO, 5.7V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC58	-	LC1253CC3TR58	LVR-IC	LDO, 5.8V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC59	-	LC1253CC3TR59	LVR-IC	LDO, 5.9V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC6	jb	XC6371A260P	DC-DC-IC	PWM step-up, 50kHz, 2.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC6	jd	XC6373A260P	DC-DC-IC	PWM step-up, 30kHz, 2.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC60	-	LC1253CC3TR60	LVR-IC	LDO, 6.0V±2%, 400mA	SOT-89	20vl	VR1	4bb	Lch
AC7	jb	XC6371A270P	DC-DC-IC	PWM step-up, 50kHz, 2.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC7	jd	XC6373A270P	DC-DC-IC	PWM step-up, 30kHz, 2.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC8	jb	XC6371A280P	DC-DC-IC	PWM step-up, 50kHz, 2.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC8	jd	XC6373A280P	DC-DC-IC	PWM step-up, 30kHz, 2.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC9	jb	XC6371A290P	DC-DC-IC	PWM step-up, 50kHz, 2.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AC9	jd	XC6373A290P	DC-DC-IC	PWM step-up, 30kHz, 2.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
ACA21	-	AME8500AEFTCA21	Vdet-IC	2.1V±1.5%, +Reset PPO, 1.5ms	SOT-89	20vde	VD7	4b	Ame
ACA21	jj	AME8500AEFTCA21Z	Vdet-IC	2.1V±1.5%, +Reset PPO, 1.5ms, lead free	SOT-89	20vde	VD7	4b	Ame
ACR	-	2SA1417-R	Si-pnp	HV, Sw, 120V, 2A, 500mW, B=100..200, 120MHz	PCP	20tb	-	4a	San
ACS	-	2SA1417-S	Si-pnp	HV, Sw, 120V, 2A, 500mW, B=140..280, 120MHz	PCP	20tb	-	4a	San
ACT	-	2SA1417-T	Si-pnp	HV, Sw, 120V, 2A, 500mW, B=200..400, 120MHz	PCP	20tb	-	4a	San
AD	-	2SD1366A-D	Si-npn	AF, 30V, 1A, 1W, B=120..240, 240MHz	SOT-89	20tb	-	4b	Ren
AD	-	BCX51-16	Si-pnp	AF, 45V, 1A, 1W, B=100..250, >100MHz	SOT-89	20tb	-	4b	Phi
AD	-	ELM99231B	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
AD	-	RT9161-26CX	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AD	-	RXT3906	Si-npn	GP, 40V, 200mA, 200mW, B= 100..300, >300MHz	SOT-89	20tb	-	4i	Rhm
AD-	-	RT9161-26PX	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AD0	jb	XC6371A300P	DC-DC-IC	PWM step-up, 50kHz, 3.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD0	jd	XC6373A300P	DC-DC-IC	PWM step-up, 30kHz, 3.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD1	jb	XC6371A310P	DC-DC-IC	PWM step-up, 50kHz, 3.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD1	jd	XC6373A310P	DC-DC-IC	PWM step-up, 30kHz, 3.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD15A	-	BL8069CC3ATR15	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD15B	-	BL8069CC3BTR15	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD15C	-	BL8069CC3CTR15	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AD16A	-	BL8069CC3ATR16	LVR-IC	LDO, 1.6V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD16B	-	BL8069CC3BTR16	LVR-IC	LDO, 1.6V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD16C	-	BL8069CC3CTR16	LVR-IC	LDO, 1.6V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD17A	-	BL8069CC3ATR17	LVR-IC	LDO, 1.7V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD17B	-	BL8069CC3BTR17	LVR-IC	LDO, 1.7V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD17C	-	BL8069CC3CTR17	LVR-IC	LDO, 1.7V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD18A	-	BL8069CC3ATR18	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD18B	-	BL8069CC3BTR18	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD18C	-	BL8069CC3CTR18	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD19A	-	BL8069CC3ATR19	LVR-IC	LDO, 1.9V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD19B	-	BL8069CC3BTR19	LVR-IC	LDO, 1.9V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD19C	-	BL8069CC3CTR19	LVR-IC	LDO, 1.9V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD2	jb	XC6371A320P	DC-DC-IC	PWM step-up, 50kHz, 3.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD2	jd	XC6373A320P	DC-DC-IC	PWM step-up, 30kHz, 3.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD20A	-	BL8069CC3ATR20	LVR-IC	LDO, 2.0V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD20B	-	BL8069CC3BTR20	LVR-IC	LDO, 2.0V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD20C	-	BL8069CC3CTR20	LVR-IC	LDO, 2.0V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD21A	-	BL8069CC3ATR21	LVR-IC	LDO, 2.1V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD21B	-	BL8069CC3BTR21	LVR-IC	LDO, 2.1V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD21C	-	BL8069CC3CTR21	LVR-IC	LDO, 2.1V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD22A	-	BL8069CC3ATR22	LVR-IC	LDO, 2.2V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD22B	-	BL8069CC3BTR22	LVR-IC	LDO, 2.2V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD22C	-	BL8069CC3CTR22	LVR-IC	LDO, 2.2V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD23A	-	BL8069CC3ATR23	LVR-IC	LDO, 2.3V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD23B	-	BL8069CC3BTR23	LVR-IC	LDO, 2.3V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD23C	-	BL8069CC3CTR23	LVR-IC	LDO, 2.3V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD24A	-	BL8069CC3ATR24	LVR-IC	LDO, 2.4V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD24B	-	BL8069CC3BTR24	LVR-IC	LDO, 2.4V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD24C	-	BL8069CC3CTR24	LVR-IC	LDO, 2.4V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD25A	-	BL8069CC3ATR25	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD25B	-	BL8069CC3BTR25	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD25C	-	BL8069CC3CTR25	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD26A	-	BL8069CC3ATR26	LVR-IC	LDO, 2.6V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD26B	-	BL8069CC3BTR26	LVR-IC	LDO, 2.6V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD26C	-	BL8069CC3CTR26	LVR-IC	LDO, 2.6V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD27A	-	BL8069CC3ATR27	LVR-IC	LDO, 2.7V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD27B	-	BL8069CC3BTR27	LVR-IC	LDO, 2.7V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD27C	-	BL8069CC3CTR27	LVR-IC	LDO, 2.7V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD28A	-	BL8069CC3ATR28	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD28B	-	BL8069CC3BTR28	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD28C	-	BL8069CC3CTR28	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD29A	-	BL8069CC3ATR29	LVR-IC	LDO, 2.9V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD29B	-	BL8069CC3BTR29	LVR-IC	LDO, 2.9V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD29C	-	BL8069CC3CTR29	LVR-IC	LDO, 2.9V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD3	jb	XC6371A330P	DC-DC-IC	PWM step-up, 50kHz, 3.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD3	jd	XC6373A330P	DC-DC-IC	PWM step-up, 30kHz, 3.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD30A	-	BL8069CC3ATR30	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD30B	-	BL8069CC3BTR30	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD30C	-	BL8069CC3CTR30	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD31A	-	BL8069CC3ATR31	LVR-IC	LDO, 3.1V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD31B	-	BL8069CC3BTR31	LVR-IC	LDO, 3.1V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD31C	-	BL8069CC3CTR31	LVR-IC	LDO, 3.1V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD32A	-	BL8069CC3ATR32	LVR-IC	LDO, 3.2V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD32B	-	BL8069CC3BTR32	LVR-IC	LDO, 3.2V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD32C	-	BL8069CC3CTR32	LVR-IC	LDO, 3.2V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD33A	-	BL8069CC3ATR33	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD33B	-	BL8069CC3BTR33	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD33C	-	BL8069CC3CTR33	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD34A	-	BL8069CC3ATR34	LVR-IC	LDO, 3.4V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD34B	-	BL8069CC3BTR34	LVR-IC	LDO, 3.4V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD34C	-	BL8069CC3CTR34	LVR-IC	LDO, 3.4V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD35A	-	BL8069CC3ATR35	LVR-IC	LDO, 3.5V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD35B	-	BL8069CC3BTR35	LVR-IC	LDO, 3.5V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD35C	-	BL8069CC3CTR35	LVR-IC	LDO, 3.5V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD36A	-	BL8069CC3ATR36	LVR-IC	LDO, 3.6V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD36B	-	BL8069CC3BTR36	LVR-IC	LDO, 3.6V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD36C	-	BL8069CC3CTR36	LVR-IC	LDO, 3.6V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD37A	-	BL8069CC3ATR37	LVR-IC	LDO, 3.7V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD37B	-	BL8069CC3BTR37	LVR-IC	LDO, 3.7V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD37C	-	BL8069CC3CTR37	LVR-IC	LDO, 3.7V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AD38A	-	BL8069CC3ATR38	LVR-IC	LDO, 3.8V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD38B	-	BL8069CC3BTR38	LVR-IC	LDO, 3.8V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD38C	-	BL8069CC3CTR38	LVR-IC	LDO, 3.8V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD39A	-	BL8069CC3ATR39	LVR-IC	LDO, 3.9V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD39B	-	BL8069CC3BTR39	LVR-IC	LDO, 3.9V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD39C	-	BL8069CC3CTR39	LVR-IC	LDO, 3.9V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD4	jb	XC6371A340P	DC-DC-IC	PWM step-up, 50kHz, 3.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD4	jd	XC6373A340P	DC-DC-IC	PWM step-up, 30kHz, 3.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD40A	-	BL8069CC3ATR40	LVR-IC	LDO, 4.0V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD40B	-	BL8069CC3BTR40	LVR-IC	LDO, 4.0V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD40C	-	BL8069CC3CTR40	LVR-IC	LDO, 4.0V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD41A	-	BL8069CC3ATR41	LVR-IC	LDO, 4.1V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD41B	-	BL8069CC3BTR41	LVR-IC	LDO, 4.1V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD41C	-	BL8069CC3CTR41	LVR-IC	LDO, 4.1V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD42A	-	BL8069CC3ATR42	LVR-IC	LDO, 4.2V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD42B	-	BL8069CC3BTR42	LVR-IC	LDO, 4.2V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD42C	-	BL8069CC3CTR42	LVR-IC	LDO, 4.2V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD43A	-	BL8069CC3ATR43	LVR-IC	LDO, 4.3V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD43B	-	BL8069CC3BTR43	LVR-IC	LDO, 4.3V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD43C	-	BL8069CC3CTR43	LVR-IC	LDO, 4.3V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD44A	-	BL8069CC3ATR44	LVR-IC	LDO, 4.4V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD44B	-	BL8069CC3BTR44	LVR-IC	LDO, 4.4V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD44C	-	BL8069CC3CTR44	LVR-IC	LDO, 4.4V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD45A	-	BL8069CC3ATR45	LVR-IC	LDO, 4.5V±2%, 600mA	SOT-89	20ch	VR1	4bb	Shb
AD45B	-	BL8069CC3BTR45	LVR-IC	LDO, 4.5V±2%, 600mA	SOT-89	20vl	VR1	4bb	Shb
AD45C	-	BL8069CC3CTR45	LVR-IC	LDO, 4.5V±2%, 600mA	SOT-89	20cg	VR1	4bb	Shb
AD5	jb	XC6371A350P	DC-DC-IC	PWM step-up, 50kHz, 3.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD5	jd	XC6373A350P	DC-DC-IC	PWM step-up, 30kHz, 3.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD6	jb	XC6371A360P	DC-DC-IC	PWM step-up, 50kHz, 3.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD6	jd	XC6373A360P	DC-DC-IC	PWM step-up, 30kHz, 3.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD7	jb	XC6371A370P	DC-DC-IC	PWM step-up, 50kHz, 3.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD7	jd	XC6373A370P	DC-DC-IC	PWM step-up, 30kHz, 3.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD8	jb	XC6371A380P	DC-DC-IC	PWM step-up, 50kHz, 3.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD8	jd	XC6373A380P	DC-DC-IC	PWM step-up, 30kHz, 3.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD9	jb	XC6371A390P	DC-DC-IC	PWM step-up, 50kHz, 3.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AD9	jd	XC6373A390P	DC-DC-IC	PWM step-up, 30kHz, 3.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
ADR	-	2SA1418-R	Si-pnp	HV, Pre-Drive, 180V, 700mA, 500mW, B=100..200, 120MHz	PCP	20tb	-	4a	San
ADS	-	2SA1418-S	Si-pnp	HV, Pre-Drive, 180V, 700mA, 500mW, B=140..280, 120MHz	PCP	20tb	-	4a	San
ADT	-	2SA1418-T	Si-pnp	HV, Pre-Drive, 180V, 700mA, 500mW, B=200..400, 120MHz	PCP	20tb	-	4a	San
ADW	-	2SC5547	Si-npn	UHF, TV-tun, 20V, 50mA, 400mW, 4.5GHz, B=30..200	SOT-89	20tb	-	4a	Ish
AE	-	2SA1363-E	Si-pnp	Relay-Drv, 20V, 2A, 500mW, B=150..300, 80MHz	SOT-89	20tb	-	4a	Mit
AE	-	BCX52	Si-pnp	AF, 60V, 1A, 1W, B=40..250, >100MHz	SOT-89	20tb	-	4b	Phi
AE	-	ELM99241B	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
AE	-	RT9161-30CX	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AE-	-	RT9161-30PX	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AE0	jb	XC6371A400P	DC-DC-IC	PWM step-up, 50kHz, 4.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE0	jd	XC6373A400P	DC-DC-IC	PWM step-up, 30kHz, 4.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE1	jb	XC6371A410P	DC-DC-IC	PWM step-up, 50kHz, 4.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE1	jd	XC6373A410P	DC-DC-IC	PWM step-up, 30kHz, 4.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE2	jb	XC6371A420P	DC-DC-IC	PWM step-up, 50kHz, 4.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE2	jd	XC6373A420P	DC-DC-IC	PWM step-up, 30kHz, 4.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE3	jb	XC6371A430P	DC-DC-IC	PWM step-up, 50kHz, 4.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE3	jd	XC6373A430P	DC-DC-IC	PWM step-up, 30kHz, 4.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE4	jb	XC6371A440P	DC-DC-IC	PWM step-up, 50kHz, 4.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE4	jd	XC6373A440P	DC-DC-IC	PWM step-up, 30kHz, 4.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE5	jb	XC6371A450P	DC-DC-IC	PWM step-up, 50kHz, 4.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE5	jd	XC6373A450P	DC-DC-IC	PWM step-up, 30kHz, 4.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE6	jb	XC6371A460P	DC-DC-IC	PWM step-up, 50kHz, 4.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE6	jd	XC6373A460P	DC-DC-IC	PWM step-up, 30kHz, 4.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE7	jb	XC6371A470P	DC-DC-IC	PWM step-up, 50kHz, 4.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE7	jd	XC6373A470P	DC-DC-IC	PWM step-up, 30kHz, 4.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE8	jb	XC6371A480P	DC-DC-IC	PWM step-up, 50kHz, 4.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE8	jd	XC6373A480P	DC-DC-IC	PWM step-up, 30kHz, 4.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE9	jb	XC6371A490P	DC-DC-IC	PWM step-up, 50kHz, 4.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AE9	jd	XC6373A490P	DC-DC-IC	PWM step-up, 30kHz, 4.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AEP	-	2SB1424-P	Si-pnp	AF, Lo-sat, 20V, 3A, 600mW, B=82..180, >240MHz	SOT-89	20tb	-	4b	Rhm
AEQ	-	2SB1424-Q	Si-pnp	AF, Lo-sat, 20V, 3A, 600mW, B=120..270, >240MHz	SOT-89	20tb	-	4b	Rhm
AER	-	2SA1419-R	Si-pnp	HV, Sw, 180V, 1.5A, 500mW, B=100..200, 120MHz	PCP	20tb	-	4a	San
AER	-	2SB1424-R	Si-pnp	AF, Lo-sat, 20V, 3A, 600mW, B=390..820, >240MHz	SOT-89	20tb	-	4b	Rhm
AES	-	2SA1419-S	Si-pnp	HV, Sw, 180V, 1.5A, 500mW, B=140..280, 120MHz	PCP	20tb	-	4a	San



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AET	-	2SA1419-T	Si-pnp	HV, Sw, 180V, 1.5A, 500mW, B=200..400, 120MHz	PCP	20tb	-	4a	San
AF	-	2SA1363-F	Si-pnp	Relay-Drv, 20V, 2A, 500mW, B=250..500, 80MHz	SOT-89	20tb	-	4a	Mit
AF	-	BCX52-06	Si-pnp	AF-Drv, 60V, 1A, 1W, B=40..100, 125MHz	SOT-89	20tb	-	4b	Phi
AF	-	BCX52-6	Si-pnp	AF, 60V, 1A, 1W, B=40..100, >100MHz	SOT-89	20tb	-	4b	Inf
AF	-	ELM99251B	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
AF	-	RT9161-29CX	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AF0	jb	XC6371A500P	DC-DC-IC	PWM step-up, 50kHz, 5.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF0	jd	XC6373A500P	DC-DC-IC	PWM step-up, 30kHz, 5.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF1	jb	XC6371A510P	DC-DC-IC	PWM step-up, 50kHz, 5.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF1	jd	XC6373A510P	DC-DC-IC	PWM step-up, 30kHz, 5.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF12	-	BL8552CC3TR12	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF13	-	BL8552CC3TR13	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF14	-	BL8552CC3TR14	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF15	-	BL8552CC3TR15	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF16	-	BL8552CC3TR16	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF17	-	BL8552CC3TR17	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF18	-	BL8552CC3TR18	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF19	-	BL8552CC3TR19	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF2	jb	XC6371A520P	DC-DC-IC	PWM step-up, 50kHz, 5.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF2	jd	XC6373A520P	DC-DC-IC	PWM step-up, 30kHz, 5.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF20	-	BL8552CC3TR20	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF21	-	BL8552CC3TR21	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF22	-	BL8552CC3TR22	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF23	-	BL8552CC3TR23	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF24	-	BL8552CC3TR24	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF25	-	BL8552CC3TR25	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF26	-	BL8552CC3TR26	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF27	-	BL8552CC3TR27	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF28	-	BL8552CC3TR28	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF29	-	BL8552CC3TR29	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF3	jb	XC6371A530P	DC-DC-IC	PWM step-up, 50kHz, 5.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF3	jd	XC6373A530P	DC-DC-IC	PWM step-up, 30kHz, 5.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF30	-	BL8552CC3TR30	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF31	-	BL8552CC3TR31	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF32	-	BL8552CC3TR32	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF33	-	BL8552CC3TR33	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF34	-	BL8552CC3TR34	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF35	-	BL8552CC3TR35	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF36	-	BL8552CC3TR36	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20vl	VR1	4ba	Shb
AF4	jb	XC6371A540P	DC-DC-IC	PWM step-up, 50kHz, 5.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF4	jd	XC6373A540P	DC-DC-IC	PWM step-up, 30kHz, 5.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF5	jb	XC6371A550P	DC-DC-IC	PWM step-up, 50kHz, 5.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF5	jd	XC6373A550P	DC-DC-IC	PWM step-up, 30kHz, 5.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF6	jb	XC6371A560P	DC-DC-IC	PWM step-up, 50kHz, 5.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF6	jd	XC6373A560P	DC-DC-IC	PWM step-up, 30kHz, 5.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF7	jb	XC6371A570P	DC-DC-IC	PWM step-up, 50kHz, 5.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF7	jd	XC6373A570P	DC-DC-IC	PWM step-up, 30kHz, 5.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF8	jb	XC6371A580P	DC-DC-IC	PWM step-up, 50kHz, 5.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF8	jd	XC6373A580P	DC-DC-IC	PWM step-up, 30kHz, 5.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF9	jb	XC6371A590P	DC-DC-IC	PWM step-up, 50kHz, 5.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AF9	jd	XC6373A590P	DC-DC-IC	PWM step-up, 30kHz, 5.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AFC	-	2SA1575-C	Si-pnp	Vid, HF, 200V, 100mA, 500mW, B=40..80, 400MHz	SOT-89	20tb	-	4a	San
AFD	-	2SA1575-D	Si-pnp	Vid, HF, 200V, 100mA, 500mW, B=60..120, 400MHz	SOT-89	20tb	-	4a	San
AFE	-	2SA1575-E	Si-pnp	Vid, HF, 200V, 100mA, 500mW, B=100..200, 400MHz	SOT-89	20tb	-	4a	San
AFF	-	2SA1575-F	Si-pnp	Vid, HF, 200V, 100mA, 500mW, B=160..320, 400MHz	SOT-89	20tb	-	4a	San
AG	-	2SA1363-G	Si-pnp	Relay-Drv, 20V, 2A, 500mW, B=400..800, 80MHz	SOT-89	20tb	-	4a	Mit
AG	-	BCX52-10	Si-pnp	AF, 60V, 1A, 1W, B=63..160, >100MHz	SOT-89	20tb	-	4b	Phi
AG	-	ELM99261B	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
AG	-	RT9161-27CX	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AG-	-	RT9161-27PX	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AGQ	-	2SA1729-Q	Si-pnp	Sw, 50V, 1.5A, 1.3W, B=70..140, 300MHz, 50/150ns	PCP	20tb	-	4a	San
AGQ	-	2SA1797-P	Si-pnp	AF, Lo-sat, 50V, 2A, 500mW, B=82..180, >200MHz	SOT-89	20tb	-	4b	Rhm
AGQ	-	2SA1797-Q	Si-pnp	AF, Lo-sat, 50V, 2A, 500mW, B=120..270, >200MHz	SOT-89	20tb	-	4b	Rhm
AGR	-	2SA1729-R	Si-pnp	Sw, 50V, 1.5A, 1.3W, B=100..200, 300MHz, 50/150ns	PCP	20tb	-	4a	San
AGS	-	2SA1729-S	Si-pnp	Sw, 50V, 1.5A, 1.3W, B=140..280, 300MHz, 50/150ns	PCP	20tb	-	4a	San
AH	-	2SB1000-H	Si-pnp	AF, 25V, 1A, 1W, 200MHz, B=85..120	SOT-89	20tb	-	4a	Ren
AH	-	BCX53	Si-pnp	AF, 80V, 1A, 1W, B=40..250, >100MHz	SOT-89	20tb	-	4b	Phi
AH	-	ELM99271B	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
AH	-	RT9161-31CX	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AH	-	TFM2098	Si-npn	AF, GP, 20V, 5A 600mW, B=120..820, 150MHz	SOT-89	20tb	-	4g	Tfr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AH	-	TFM69	Si-pnp	AF, GP, 30V, 1A, 600mW, B=100..400, 100MHz	SOT-89	20tb	-	4g	Tfr
AH-	-	RT9161-31PX	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AH0	jb	XC6371A600P	DC-DC-IC	PWM step-up, 50kHz, 6.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH0	jd	XC6373A600P	DC-DC-IC	PWM step-up, 30kHz, 6.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH1	jb	XC6371A610P	DC-DC-IC	PWM step-up, 50kHz, 6.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH1	jd	XC6373A610P	DC-DC-IC	PWM step-up, 30kHz, 6.1V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH16	-	TFM69-16	Si-pnp	AF, GP, 30V, 1A, 600mW, B=100..250, 100MHz	SOT-89	20tb	-	4g	Tfr
AH2	jb	XC6371A620P	DC-DC-IC	PWM step-up, 50kHz, 6.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH2	jd	XC6373A620P	DC-DC-IC	PWM step-up, 30kHz, 6.2V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH25	-	TFM69-25	Si-pnp	AF, GP, 30V, 1A, 600mW, B=160..400, 100MHz	SOT-89	20tb	-	4g	Tfr
AH3	jb	XC6371A630P	DC-DC-IC	PWM step-up, 50kHz, 6.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH3	jd	XC6373A630P	DC-DC-IC	PWM step-up, 30kHz, 6.3V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH4	jb	XC6371A640P	DC-DC-IC	PWM step-up, 50kHz, 6.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH4	jd	XC6373A640P	DC-DC-IC	PWM step-up, 30kHz, 6.4V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH5	jb	XC6371A650P	DC-DC-IC	PWM step-up, 50kHz, 6.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH5	jd	XC6373A650P	DC-DC-IC	PWM step-up, 30kHz, 6.5V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH6	jb	XC6371A660P	DC-DC-IC	PWM step-up, 50kHz, 6.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH6	jd	XC6373A660P	DC-DC-IC	PWM step-up, 30kHz, 6.6V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH7	jb	XC6371A670P	DC-DC-IC	PWM step-up, 50kHz, 6.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH7	jd	XC6373A670P	DC-DC-IC	PWM step-up, 30kHz, 6.7V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH8	jb	XC6371A680P	DC-DC-IC	PWM step-up, 50kHz, 6.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH8	jd	XC6373A680P	DC-DC-IC	PWM step-up, 30kHz, 6.8V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH9	jb	XC6371A690P	DC-DC-IC	PWM step-up, 50kHz, 6.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AH9	jd	XC6373A690P	DC-DC-IC	PWM step-up, 30kHz, 6.9V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AHN	-	2SA1759-N	Si-pnp	Sw, 400/400V, 100mA, 500mW, B=82..120, 12MHz	SOT-89	20tb	-	4b	Rhm
AHP	-	2SA1759-P	Si-pnp	Sw, 400/400V, 100mA, 500mW, B=100..160, 12MHz	SOT-89	20tb	-	4b	Rhm
AHQ	-	2SA1730-Q	Si-pnp	Sw, 50V, 3A, 1.5W, B=70..140, 300MHz, 50/150ns	PCP	20tb	-	4a	San
AHQ	-	2SA1759-Q	Si-pnp	Sw, 400/400V, 100mA, 500mW, B=140..180, 12MHz	SOT-89	20tb	-	4b	Rhm
AHQ	-	2SD2098-Q	Si-npn	AF-Drv, 50V, 5A, 500mW, B=120..270, 150MHz	SOT-89	20tb	-	4b	Rhm
AHQ	-	TFM2098Q	Si-npn	AF, GP, 20V, 5A 600mW, B=120..270, 150MHz	SOT-89	20tb	-	4g	Tfr
AHR	-	2SA1730-R	Si-pnp	Sw, 50V, 3A, 1.5W, B=100..200, 300MHz, 50/150ns	PCP	20tb	-	4a	San
AHR	-	2SD2098-R	Si-npn	AF-Drv, 50V, 5A, 500mW, B=180..390, 150MHz	SOT-89	20tb	-	4b	Rhm
AHR	-	TFM2098R	Si-npn	AF, GP, 20V, 5A 600mW, B=180..390, 150MHz	SOT-89	20tb	-	4g	Tfr
AHS	-	2SA1730-S	Si-pnp	Sw, 50V, 3A, 1.5W, B=140..280, 300MHz, 50/150ns	PCP	20tb	-	4a	San
AHS	-	TFM2098S	Si-npn	AF, GP, 20V, 5A 600mW, B=270..560, 150MHz	SOT-89	20tb	-	4g	Tfr
AHT	-	TFM2098T	Si-npn	AF, GP, 20V, 5A 600mW, B=390..820, 150MHz	SOT-89	20tb	-	4g	Tfr
AIS	-	2SA1882-S	Si-pnp	AF-Amp, 15V, 1.5A, 1.3W, B=140..280, 300MHz	PCP	20tb	-	4a	San
AIT	-	2SA1882-T	Si-pnp	AF-Amp, 15V, 1.5A, 1.3W, B=200..400, 300MHz	PCP	20tb	-	4a	San
AIU	-	2SA1882-U	Si-pnp	AF-Amp, 15V, 1.5A, 1.3W, B=280..560, 300MHz	PCP	20tb	-	4a	San
AJ	-	2SA1724	Si-pnp	Vid, Hi-def, 30V, 300mA, 500mW, B=155..100, 1.5GHz	PCP	20tb	-	4a	San
AJ	-	2SB1000-J	Si-pnp	AF, 25V, 1A, 1W, 200MHz, B=120..240	SOT-89	20tb	-	4a	Ren
AJ	-	BCX53-06	Si-pnp	AF, 80V, 1A, 1W, B=40..100, >100MHz	SOT-89	20tb	-	4b	Inf
AJ	-	ELM99281B	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
AJ	-	RT9161-32CX	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AJ	-	TFM56	Si-npn	AF, GP, 80V, 1A, 600mW, B=100..400, 150MHz	SOT-89	20tb	-	4g	Tfr
AJ16	-	TFM56-16	Si-npn	AF, GP, 80V, 1A, 600mW, B=100..250, 150MHz	SOT-89	20tb	-	4g	Tfr
AJ25	-	TFM56-25	Si-npn	AF, GP, 80V, 1A, 600mW, B=160..400, 150MHz	SOT-89	20tb	-	4g	Tfr
AJN	-	2SA1812-N	Si-pnp	Sw, 400V, 100mA, 500mW, B=56..120, >12MHz	SOT-89	20tb	-	4b	Rhm
AJP	-	2SA1812-P	Si-pnp	Sw, 400V, 100mA, 500mW, B=82..180, >12MHz	SOT-89	20tb	-	4b	Rhm
AJQ	-	2SA1812-Q	Si-pnp	Sw, 400V, 100mA, 500mW, B=120..270, >12MHz	SOT-89	20tb	-	4b	Rhm
AK	-	BCX53-10	Si-pnp	AF, 80V, 1A, 1W, B=63..160, >100MHz	SOT-89	20tb	-	4b	Phi
AK	-	ELM99291B	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
AK	-	RT9161-34CX	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AK	-	TFM53	Si-pnp	AF, GP, 80V, 1A, 600mW, B=100..400, 150MHz	SOT-89	20tb	-	4g	Tfr
AK0	jb	XC6371A700P	DC-DC-IC	PWM step-up, 50kHz, 7.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AK0	jd	XC6373A700P	DC-DC-IC	PWM step-up, 30kHz, 7.0V±2.5%, 100mA	SOT-89	20bq	DC2	4c	Tor
AK16	-	TFM53-16	Si-pnp	AF, GP, 80V, 1A, 600mW, B=100..250, 150MHz	SOT-89	20tb	-	4g	Tfr
AK25	-	TFM53-25	Si-pnp	AF, GP, 80V, 1A, 600mW, B=160..400, 150MHz	SOT-89	20tb	-	4g	Tfr
AKD	-	2SA1470-D	Si-pnp	HV, Drv, 400V, 200mA, 1.3W, B=60..120, 70MHz	PCP	20tb	-	4a	San
AKD	-	2SA1740-D	Si-pnp	Vid, HV, 400V, 200mA, 500mW, 70MHz, B=60..120	SOT-89	20tb	-	4a	San
AKE	-	2SA1470-E	Si-pnp	HV, Drv, 400V, 200mA, 1.3W, B=100..200, 70MHz	PCP	20tb	-	4a	San
AKE	-	2SA1740-E	Si-pnp	Vid, HV, 400V, 200mA, 500mW, 70MHz, B=100..200	SOT-89	20tb	-	4a	San
AKQ	-	2SC5807-Q	Si-npn	AF, 50V, 5A, 500mW, B=120..270, 150MHz	SOT-89	20tb	-	4a	Mit
AKR	-	2SC5807-R	Si-npn	AF, 50V, 5A, 500mW, B=180..390, 150MHz	SOT-89	20tb	-	4a	Mit
AL	-	2SA1766	Si-pnp	AF-Amp, , 30V, 300mA, 1.3W, B=500..1200, 100MHz	PCP	20tb	-	4a	San
AL	-	BCX53-16	Si-pnp	AF, 80V, 1A, 1W, B=100..250, >100MHz	SOT-89	20tb	-	4b	Phi
AL	-	RT9161-36CX	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AL-	-	RT9161-36PX	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AL15	-	AIC1722A-15CXA	LVR-IC	LDO, 1.5V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL15G	-	AIC1722A-15GXA	LVR-IC	LDO, 1.5V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AL15P	-	AIC1722A-15PXA	LVR-IC	LDO, 1.5V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL18	-	AIC1722A-18CXA	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL18G	-	AIC1722A-18GXA	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL18P	-	AIC1722A-18PXA	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL20	-	AIC1722A-20CXA	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL20G	-	AIC1722A-20GXA	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL20P	-	AIC1722A-20PXA	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL25	-	AIC1722A-25CXA	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL25G	-	AIC1722A-25GXA	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL25P	-	AIC1722A-25PXA	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL27	-	AIC1722A-27CXA	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL27G	-	AIC1722A-27GXA	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL27P	-	AIC1722A-27PXA	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL30	-	AIC1722A-30CXA	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL30G	-	AIC1722A-30GXA	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL30P	-	AIC1722A-30PXA	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL33	-	AIC1722A-33CXA	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL33G	-	AIC1722A-33GXA	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL33P	-	AIC1722A-33PXA	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL35	-	AIC1722A-35CXA	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL35G	-	AIC1722A-35GXA	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL35P	-	AIC1722A-35PXA	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL37	-	AIC1722A-37CXA	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL37G	-	AIC1722A-37GXA	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL37P	-	AIC1722A-37PXA	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL38	-	AIC1722A-38CXA	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL38G	-	AIC1722A-38GXA	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL38P	-	AIC1722A-38PXA	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL50	-	AIC1722A-50CXA	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL50G	-	AIC1722A-50GXA	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL50P	-	AIC1722A-50PXA	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL52	-	AIC1722A-52CXA	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL52G	-	AIC1722A-52GXA	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
AL52P	-	AIC1722A-52PXA	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
ALP	-	2SA1900-P	Si-pnp	Lo-sat, 60V, 1A, 500mW, B=82..180, >150MHz	SOT-89	20tb	-	4b	Rhm
ALQ	-	2SA1900-Q	Si-pnp	Lo-sat, 60V, 1A, 500mW, B=120..270, >150MHz	SOT-89	20tb	-	4b	Rhm
ALR	-	2SA1900-R	Si-pnp	Lo-sat, 60V, 1A, 500mW, B=180..390, >150MHz	SOT-89	20tb	-	4b	Rhm
AM	-	BCX52-16	Si-pnp	AF, 60V, 1A, 1W, B=100..250, >100MHz	SOT-89	20tb	-	4b	Phi
AM	-	RT9161-41CX	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AMS	-	2SA1896-S	Si-pnp	DC/DC-Conv, 25V, 2.5A, 1.3W, B=140..280, 400MHz	PCP	20tb	-	4a	San
AMT	-	2SA1896-T	Si-pnp	DC/DC-Conv, 25V, 2.5A, 1.3W, B=200..400, 400MHz	PCP	20tb	-	4a	San
ANR	-	2SA1898-R	Si-pnp	DC/DC-Conv, 15V, 3A, 1.3W, B=100..200, 400MHz	PCP	20tb	-	4a	San
ANS	-	2SA1898-S	Si-pnp	DC/DC-Conv, 15V, 3A, 1.3W, B=140..280, 400MHz	PCP	20tb	-	4a	San
AO	-	2SC2880-O	Si-npn	HV, 150V, 50mA, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4b	Tos
AO	-	KTC4372-O	Si-npn	HV, Sw, 150V, 50mA, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4a	Kec
AP	-	RT9161-15CX	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AP-	-	RT9161-15PX	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AQ	-	2SA1969	Si-pnp	HF, Fast-Sw, 10/10V, 400mA, 1.3W, B=20..120, 1.7GHz	PCP	20tb	-	4a	San
AQ	-	2SB766-Q	Si-pnp	AF, 50V, 1A, 1W, B=85..170, 200MHz	SOT-89	20tb	-	4b	Pan
AQ	-	RT9161-20CX	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AR	-	2SA2011	Si-pnp	Lo-sat, 15V, 6A, 1.3W, B=200..560, 380MHz, 35/1105ns	SOT-89	20tb	-	4a	San
AR	-	2SB766-R	Si-pnp	AF, 50V, 1A, 1W, B=120..240, 200MHz	SOT-89	20tb	-	4b	Pan
AR	-	2SC3338	Si-npn	UHF/VHF WB-Amp, 20V, 50mA, 400mW, 4.5GHz, B=30..200	SOT-89	20tb	-	4b	Ren
AR1	-	BSR40	Si-npn	AF, Sw, 70V, 1A, 1.35W, B=40..120, 100MHz	SOT-89	20tb	-	4b	Phi
AR2	-	BSR41	Si-npn	AF, Sw, 70V, 1A, 1W, B=100..300, 100MHz	SOT-89	20tb	-	4b	Phi
AR3	-	BSR42	Si-npn	AF, Sw, 90V, 1A, 1W, B=40..120, 100MHz	SOT-89	20tb	-	4b	Phi
AR4	-	BSR43	Si-npn	AF, Sw, 90V, 1A, 1W, B=100..300, 100MHz	SOT-89	20tb	-	4b	Phi
AS	-	2SA2012	Si-pnp	Lo-sat, 30V, 5A, 1.3W, B=200..560, 420MHz, 50/270ns	SOT-89	20tb	-	4a	San
AS	-	2SB766-S	Si-pnp	AF, 50V, 1A, 1W, B=170..340, 200MHz	SOT-89	20tb	-	4b	Pan
AS	-	2SC3380	Si-npn	Vid, 300V, 100mA, 1W, B=30..200, 80MHz	SOT-89	20tb	-	4b	Ren
AS	-	RT9161-22CX	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AS-	-	RT9161-22PX	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AS1	-	BST50	Si-npn-Darl+Di	AF, 60V, 500mA, 1.3W, B>2000, 350MHz	SOT-89	20tb	-	4b	Phi
AS2	-	BST51	Si-npn-Darl+Di	AF, 80V, 500mA, 1.3W, B>2000, 350MHz	SOT-89	20tb	-	4b	Phi
AS3	-	BST52	Si-npn-Darl+Di	AF, 90V, 500mA, 1.3W, B>2000, 350MHz	SOT-89	20tb	-	4b	Phi
AT	-	2SA2013	Si-pnp	Lo-sat, 50V, 4A, 1.3W, B=200..560, 400MHz, 30/230ns	SOT-89	20tb	-	4a	San
AT	-	2SD1470	Si-npn-Darl	GP, 60V, 1A, 1W. B=2000..100k	SOT-89	20te	-	4b	Ren
AT	-	RT9163-50CX	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20ch	VR1	4g	Rct
AT-	-	RT9163-50PX	LVR-IC	LDO, 3.3V±2%, 500mA, Pb-free	SOT-89	20ch	VR1	4g	Rct
AT1	-	BST39	Si-npn	AF, Sw, Vid, 450V, 1A, >70MHz	SOT-89	20tb	-	4b	Phi



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AT2	-	BST40	Si-npn	AF, Sw, Vid, 300V, 1A, 1W, B>40, >70MHz	SOT-89	20tb	-	4b	Phi
ATN	-	2SA1812T-N	Si-pnp	Sw, 400V, 500mA, 500mW, B=56..120, >12MHz	SOT-89	20tb	-	4b	Rhm
ATP	-	2SA1812T-P	Si-pnp	Sw, 400V, 500mA, 500mW, B=82..180, >12MHz	SOT-89	20tb	-	4b	Rhm
ATQ	-	2SA1812T-Q	Si-pnp	Sw, 400V, 500mA, 500mW, B=120..270, >12MHz	SOT-89	20tb	-	4b	Rhm
AU	-	2SA2014	Si-pnp	Relay-Drv, 15V, 9A, 1.3W, B=200..560, 220MHz	SOT-89	20tb	-	4a	San
AU	-	2SB804-U	Si-pnp	AF-Amp, 100V, 1A, 2W, 80MHz, B=200..400	SOT-89	20tb	-	4b	Nec
AV	-	2SA2015	Si-pnp	Lo-sat, 30V, 8A, 1.3W, B=200..560, 320MHz, 30/190ns	SOT-89	20tb	-	4a	San
AV	-	2SB804-V	Si-pnp	AF-Amp, 100V, 1A, 2W, 80MHz, B=135..270	SOT-89	20tb	-	4b	Nec
AV-	-	RT9261-50PX	DC-DC-IC	VFM step-up, 5.0V±2%, 50mA	SOT-89	20br	DC5	4b	Rct
AV15G	-	AIC1723A-15GX	LVR-IC	LDO, 1.5V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV15P	-	AIC1723A-15PX	LVR-IC	LDO, 1.5V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV18G	-	AIC1723A-18GX	LVR-IC	LDO, 1.8V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV18P	-	AIC1723A-18PX	LVR-IC	LDO, 1.8V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV2	-	TFM1236A	Si-pnp	HV, 160V, 1.5A, 600mW, B=60..200, 140MHz	SOT-89	20tb	-	4g	Tfr
AV20G	-	AIC1723A-20GX	LVR-IC	LDO, 2.0V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV20P	-	AIC1723A-20PX	LVR-IC	LDO, 2.0V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV25G	-	AIC1723A-25GX	LVR-IC	LDO, 2.5V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV25P	-	AIC1723A-25PX	LVR-IC	LDO, 2.5V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV27G	-	AIC1723A-27GX	LVR-IC	LDO, 2.7V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV27P	-	AIC1723A-27PX	LVR-IC	LDO, 2.7V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV2K	-	TFM1236AK	Si-pnp	HV, 160V, 1.5A, 600mW, B=60..120, 140MHz	SOT-89	20tb	-	4g	Tfr
AV2P	-	TFM1236AP	Si-pnp	HV, 160V, 1.5A, 600mW, B=82..190, 140MHz	SOT-89	20tb	-	4g	Tfr
AV2Q	-	TFM1236AQ	Si-pnp	HV, 160V, 1.5A, 600mW, B=120..200, 140MHz	SOT-89	20tb	-	4g	Tfr
AV30G	-	AIC1723A-30GX	LVR-IC	LDO, 3.0V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV30P	-	AIC1723A-30PX	LVR-IC	LDO, 3.0V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV33G	-	AIC1723A-33GX	LVR-IC	LDO, 3.3V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV33P	-	AIC1723A-33PX	LVR-IC	LDO, 3.3V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV35G	-	AIC1723A-35GX	LVR-IC	LDO, 3.5V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV35P	-	AIC1723A-35PX	LVR-IC	LDO, 3.5V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV37G	-	AIC1723A-37GX	LVR-IC	LDO, 3.7V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV37P	-	AIC1723A-37PX	LVR-IC	LDO, 3.7V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV38G	-	AIC1723A-38GX	LVR-IC	LDO, 3.8V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV38P	-	AIC1723A-38PX	LVR-IC	LDO, 3.8V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV50G	-	AIC1723A-50GX	LVR-IC	LDO, 5.0V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV50P	-	AIC1723A-50PX	LVR-IC	LDO, 5.0V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV52G	-	AIC1723A-52GX	LVR-IC	LDO, 5.2V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AV52P	-	AIC1723A-52PX	LVR-IC	LDO, 5.2V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
AW	-	2SA2016	Si-pnp	Lo-sat, 50V, 7A, 1.3W, B=200..560, 330MHz, 40/225ns	SOT-89	20tb	-	4a	San
AW	-	2SB804-W	Si-pnp	AF-Amp, 100V, 1A, 2W, 80MHz, B=90..180	SOT-89	20tb	-	4b	Nec
AX-	-	RT9261A-50PX	DC-DC-IC	VFM step-up, 5.0V±2%, 50mA	SOT-89	20bq	DC2	4b	Rct
AY	-	2SC2880-Y	Si-npn	HV, 150V, 50mA, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4b	Tos
AY	-	KTC4372-Y	Si-npn	HV, Sw, 150V, 50mA, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4a	Kec
AY	-	RT9161-17CX	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
AZ	-	2SJ518	p-MOSFET	V-MOS, LogL, 60V, 2A, <0.63Ω(5A)	SOT-89	20fa	-	4b	Ren
B	-	XMFP2-M3	n-FET	GaAs, UHF, 6V, 700mA, 2.5W, Idss=400mA(3V), 6GHz	SOT-89	20fh	-	4u	Mur
B0	-	ELM89301A	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
B0	-	ELM9710NAB	Vdet-IC	1.0V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
B0	-	ELM9830AB	LVR-IC	3.0V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
B0	-	KIC3201S-20	LVR-IC	LDO, 2.0V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
B03	-	XC61CC1002P	Vdet-IC	1.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
B1	-	AP432Y	Vref-IC	Adjustable, Precision, Shunt, 1.24V±1%	SOT-89-3L	20rb	RF1	4b	Ana
B1	-	D71G.05T1	Si-pnp	Sw, 150/150V, 50msA	SOT-89	20tb	-	4b	Gen
B1	-	ELM89311A	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
B1	-	ELM9711NAB	Vdet-IC	1.1V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
B1	-	ELM9831AB	LVR-IC	3.1V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
B1	-	KIC3201S-21	LVR-IC	LDO, 2.1V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
B1-	-	RT9169-12PX	LVR-IC	LDO, 1.2V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
B11A	-	ML6101N113P	Vdet-IC	1.1V±3%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B12	-	LN6206P122PR	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B12A	-	ML6101N123P	Vdet-IC	1.2V±3%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B13	-	LN6206P132PR	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B13	-	XC61CC1102P	Vdet-IC	1.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
B13A	-	ML6101N133P	Vdet-IC	1.3V±3%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B14	-	LN6206P142PR	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B14A	-	ML6101N143P	Vdet-IC	1.4V±3%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B15	-	LN6206P152PR	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B15A	-	ML6101N153P	Vdet-IC	1.5V±3%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B16	-	LN6206P162PR	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B16A	-	ML6101N163P	Vdet-IC	1.6V±3%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B17	-	LN6206P172PR	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B17A	-	ML6101N173P	Vdet-IC	1.7V±3%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B18	-	LN6206P182PR	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B18A	-	ML6101N183P	Vdet-IC	1.8V±3%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B19	-	LN6206P192PR	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B19A	-	ML6101N193P	Vdet-IC	1.9V±3%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B2	-	AP432AY	Vref-IC	Adjustable, Precision, Shunt, 1.24V±0.5%	SOT-89-3L	20rb	RF1	4b	Ana
B2	-	ELM89321A	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
B2	-	ELM9712NAB	Vdet-IC	1.2V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
B2	-	ELM9832AB	LVR-IC	3.2V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
B2	-	KIC3201S-22	LVR-IC	LDO, 2.2V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
B2	-	RT9169-13CX	LVR-IC	LDO, 1.3V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
B20	-	LN6206P202PR	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B20A	-	ML6101N202P	Vdet-IC	2.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B21	-	LN6206P212PR	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B21A	-	ML6101N212P	Vdet-IC	2.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B22	-	LN6206P222PR	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B22A	-	ML6101N222P	Vdet-IC	2.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B23	-	LN6206P232PR	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B23	-	XC61CC1202P	Vdet-IC	1.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
B23A	-	ML6101N232P	Vdet-IC	2.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B24	-	LN6206P242PR	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B24A	-	ML6101N242P	Vdet-IC	2.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B25	-	LN6206P252PR	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B25A	-	ML6101N252P	Vdet-IC	2.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B26	-	LN6206P262PR	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B26A	-	ML6101N262P	Vdet-IC	2.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B27	-	LN6206P272PR	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B27A	-	ML6101N272P	Vdet-IC	2.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B28	-	LN6206P282PR	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B28A	-	ML6101N282P	Vdet-IC	2.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B29	-	LN6206P292PR	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B29A	-	ML6101N292P	Vdet-IC	2.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B3	-	ELM89331A	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
B3	-	ELM9713NAB	Vdet-IC	1.3V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
B3	-	ELM9833AB	LVR-IC	3.3V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
B3	-	KIC3201S-23	LVR-IC	LDO, 2.3V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
B3	-	RT9169-14CX	LVR-IC	LDO, 1.4V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
B3-	-	RT9169-14PX	LVR-IC	LDO, 1.4V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
B30	-	LN6206P302PR	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B30A	-	ML6101N302P	Vdet-IC	3.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B31	-	LN6206P311PR	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B31A	-	ML6101N312P	Vdet-IC	3.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B32	-	LN6206P322PR	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B32A	-	ML6101N322P	Vdet-IC	3.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B33	-	LN6206P332PR	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B33	-	XC61CC1302P	Vdet-IC	1.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
B33A	-	ML6101N332P	Vdet-IC	3.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B34	-	LN6206P342PR	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B34A	-	ML6101N342P	Vdet-IC	3.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B35	-	LN6206P352PR	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B35A	-	ML6101N352P	Vdet-IC	3.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B36	-	LN6206P362PR	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B36A	-	ML6101N362P	Vdet-IC	3.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B37	-	LN6206P372PR	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B37A	-	ML6101N372P	Vdet-IC	3.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B38	-	LN6206P382PR	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B38A	-	ML6101N382P	Vdet-IC	3.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B39	-	LN6206P392PR	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B39A	-	ML6101N392P	Vdet-IC	3.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B4	-	ELM89341A	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
B4	-	ELM9714NAB	Vdet-IC	1.4V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
B4	-	ELM9834AB	LVR-IC	3.4V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
B4	-	KIC3201S-24	LVR-IC	LDO, 2.4V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
B4	-	RT9169-15CX	LVR-IC	LDO, 1.5V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
B4	-	TC54VC1402MB	Vdet-IC	1.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
B4-	-	RT9169-15PX	LVR-IC	LDO, 1.5V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
B40	-	LN6206P402PR	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B40A	-	ML6101N402P	Vdet-IC	4.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B41	-	LN6206P412PR	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B41A	-	ML6101N412P	Vdet-IC	4.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B42	-	LN6206P422PR	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B42A	-	ML6101N422P	Vdet-IC	4.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B43	-	LN6206P432PR	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B43	-	XC61CC1402P	Vdet-IC	1.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
B43A	-	ML6101N432P	Vdet-IC	4.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B44	-	LN6206P442PR	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B44A	-	ML6101N442P	Vdet-IC	4.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B45	-	LN6206P452PR	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B45A	-	ML6101N452P	Vdet-IC	4.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B46	-	LN6206P462PR	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B46A	-	ML6101N462P	Vdet-IC	4.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B47	-	LN6206P472PR	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B47A	-	ML6101N472P	Vdet-IC	4.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B48	-	LN6206P482PR	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B48A	-	ML6101N482P	Vdet-IC	4.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B49	-	LN6206P492PR	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B49A	-	ML6101N492P	Vdet-IC	4.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B5	-	ELM89351A	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
B5	-	ELM9715NAB	Vdet-IC	1.5V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
B5	-	ELM9835AB	LVR-IC	3.5V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
B5	-	KIC3201S-25	LVR-IC	LDO, 2.5V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
B5	-	RT9169-16CX	LVR-IC	LDO, 1.6V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
B5	-	TC54VC1502MB	Vdet-IC	1.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
B5	-	TFM7560	Si-pnp-Darl	HV, 150V, 4A, 600mW, B>1000	SOT-89	20tb	-	4g	Tfr
B5-	-	RT9169-16PX	LVR-IC	LDO, 1.6V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
B50	-	LN6206P502PR	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-89	20vl	VR1	4c	Inw
B50A	-	ML6101N502P	Vdet-IC	5.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B51A	-	ML6101N512P	Vdet-IC	5.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B52A	-	ML6101N522P	Vdet-IC	5.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B53	-	XC61CC1502P	Vdet-IC	1.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
B53A	-	ML6101N532P	Vdet-IC	5.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B54A	-	ML6101N542P	Vdet-IC	5.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B55A	-	ML6101N552P	Vdet-IC	5.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B56A	-	ML6101N562P	Vdet-IC	5.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B57A	-	ML6101N572P	Vdet-IC	5.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B58A	-	ML6101N582P	Vdet-IC	5.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B59A	-	ML6101N592P	Vdet-IC	5.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B6	-	ELM89361A	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
B6	-	ELM9716NAB	Vdet-IC	1.6V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
B6	-	ELM9836AB	LVR-IC	3.6V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
B6	-	KIC3201S-26	LVR-IC	LDO, 2.6V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
B6	-	TC54VC1602MB	Vdet-IC	1.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
B60A	-	ML6101N602P	Vdet-IC	6.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4g	Mlc
B62	-	S-80841CLUA-B62-T2	Vdet-IC	4.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B63	-	S-80842CLUA-B63-T2	Vdet-IC	4.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B63	-	XC61CC1602P	Vdet-IC	1.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
B63	-	XE61CC1645PR	Vdet-IC	1.6V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
B64	-	S-80843CLUA-B64-T2	Vdet-IC	4.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B65	-	LN61FC1612P	Vdet-IC	1.6V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
B65	-	S-80844CLUA-B65-T2	Vdet-IC	4.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B65	-	XC61FC1612P	Vdet-IC	1.6V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
B66	-	LN61FC1642P	Vdet-IC	1.6V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
B66	-	S-80845CLUA-B66-T2	Vdet-IC	4.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B66	-	XC61FC1642P	Vdet-IC	1.6V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
B67	-	LN61FC1652P	Vdet-IC	1.6V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
B67	-	S-80846CLUA-B67-T2	Vdet-IC	4.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B67	-	XC61FC1652P	Vdet-IC	1.6V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
B68	-	S-80847CLUA-B68-T2	Vdet-IC	4.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B69	-	S-80848CLUA-B69-T2	Vdet-IC	4.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6A	-	S-80815CLUA-B6A-T2	Vdet-IC	1.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6B	-	S-80816CLUA-B6B-T2	Vdet-IC	1.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6C	-	S-80817CLUA-B6C-T2	Vdet-IC	1.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6D	-	S-80818CLUA-B6D-T2	Vdet-IC	1.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6E	-	S-80819CLUA-B6E-T2	Vdet-IC	1.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6F	-	S-80820CLUA-B6F-T2	Vdet-IC	2.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6G	-	S-80821CLUA-B6G-T2	Vdet-IC	2.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6H	-	S-80822CLUA-B6H-T2	Vdet-IC	2.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6I	-	S-80823CLUA-B6I-T2	Vdet-IC	2.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6J	-	S-80824CLUA-B6J-T2	Vdet-IC	2.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6K	-	S-80825CLUA-B6K-T2	Vdet-IC	2.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B6L	-	S-80826CLUA-B6L-T2	Vdet-IC	2.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6M	-	S-80827CLUA-B6M-T2	Vdet-IC	2.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6N	-	S-80828CLUA-B6N-T2	Vdet-IC	2.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6O	-	S-80829CLUA-B6O-T2	Vdet-IC	2.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6P	-	S-80830CLUA-B6P-T2	Vdet-IC	3.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6Q	-	S-80831CLUA-B6Q-T2	Vdet-IC	3.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6R	-	S-80832CLUA-B6R-T2	Vdet-IC	3.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6S	-	S-80833CLUA-B6S-T2	Vdet-IC	3.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6T	-	S-80834CLUA-B6T-T2	Vdet-IC	3.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6U	-	S-80835CLUA-B6U-T2	Vdet-IC	3.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6V	-	S-80836CLUA-B8U-T2	Vdet-IC	3.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6W	-	S-80837CLUA-B6W-T2	Vdet-IC	3.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6X	-	S-80838CLUA-B6X-T2	Vdet-IC	3.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6Y	-	S-80839CLUA-B6Y-T2	Vdet-IC	3.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B6Z	-	S-80840CLUA-B6Z-T2	Vdet-IC	4.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B7	-	ELM89371A	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
B7	-	ELM9717NAB	Vdet-IC	1.7V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
B7	-	ELM9837AB	LVR-IC	3.7V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
B7	-	KIC3201S-27	LVR-IC	LDO, 2.7V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
B7	-	RT9169-18CX	LVR-IC	LDO, 1.8V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
B7	-	TC54VC1702MB	Vdet-IC	1.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
B7-	-	RT9169-18PX	LVR-IC	LDO, 1.8V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
B73	-	XC61CC1702P	Vdet-IC	1.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
B73	-	XE61CC1745PR	Vdet-IC	1.7V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
B75	-	LN61FC1712P	Vdet-IC	1.7V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
B75	-	XC61FC1712P	Vdet-IC	1.7V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
B76	-	LN61FC1742P	Vdet-IC	1.7V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
B76	-	XC61FC1742P	Vdet-IC	1.7V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
B77	-	LN61FC1752P	Vdet-IC	1.7V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
B77	-	XC61FC1752P	Vdet-IC	1.7V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
B772GR	-	WTM772-GR	Si-pnp	GP, 40V, 3A, 500mW, B=200..400, 80MHz	SOT-89	20tb	-	4b	Wtr
B772O	-	WTM772-O	Si-pnp	GP, 40V, 3A, 500mW, B=100..200, 80MHz	SOT-89	20tb	-	4b	Wtr
B772R	-	WTM772-R	Si-pnp	GP, 40V, 3A, 500mW, B=60..120, 80MHz	SOT-89	20tb	-	4b	Wtr
B772Y	-	WTM772-Y	Si-pnp	GP, 40V, 3A, 500mW, B=160..320, 80MHz	SOT-89	20tb	-	4b	Wtr
B7A	-	S-80849CLUA-B7A-T2	Vdet-IC	4.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B7B	-	S-80850CLUA-B7B-T2	Vdet-IC	5.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B7C	-	S-80851CLUA-B7C-T2	Vdet-IC	5.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B7D	-	S-80852CLUA-B7D-T2	Vdet-IC	5.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B7E	-	S-80853CLUA-B7E-T2	Vdet-IC	5.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B7F	-	S-80854CLUA-B7F-T2	Vdet-IC	5.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B7G	-	S-80855CLUA-B7G-T2	Vdet-IC	5.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B7H	-	S-80856CLUA-B7H-T2	Vdet-IC	5.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B7I	-	S-80857CLUA-B7I-T2	Vdet-IC	5.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B7J	-	S-80858CLUA-B7J-T2	Vdet-IC	5.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B7K	-	S-80859CLUA-B7K-T2	Vdet-IC	5.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B7L	-	S-80860CLUA-B7L-T2	Vdet-IC	6.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
B8	-	ELM89381A	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
B8	-	ELM9718NAB	Vdet-IC	1.8V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
B8	-	ELM9838AB	LVR-IC	3.8V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
B8	-	KIC3201S-28	LVR-IC	LDO, 2.8V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
B8	-	RT9169-19CX	LVR-IC	LDO, 1.9V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
B8	-	TC54VC1802MB	Vdet-IC	1.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
B82	-	S-80841CNUA-B82-T2	Vdet-IC	4.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B83	-	S-80842CNUA-B83-T2	Vdet-IC	4.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B83	-	XC61CC1802P	Vdet-IC	1.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
B83	-	XE61CC1845PR	Vdet-IC	1.8V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
B84	-	S-80843CNUA-B84-T2	Vdet-IC	4.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B85	-	LN61FC1812P	Vdet-IC	1.8V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
B85	-	S-80844CNUA-B85-T2	Vdet-IC	4.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B85	-	XC61FC1812P	Vdet-IC	1.8V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
B86	-	LN61FC1842P	Vdet-IC	1.8V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
B86	-	S-80845CNUA-B86-T2	Vdet-IC	4.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B86	-	XC61FC1842P	Vdet-IC	1.8V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
B87	-	LN61FC1852P	Vdet-IC	1.8V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
B87	-	S-80846CNUA-B87-T2	Vdet-IC	4.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B87	-	XC61FC1852P	Vdet-IC	1.8V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
B88	-	S-80847CNUA-B88-T2	Vdet-IC	4.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B89	-	S-80848CNUA-B89-T2	Vdet-IC	4.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8A	-	S-80815CNUA-B8A-T2	Vdet-IC	1.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8B	-	S-80816CNUA-B8B-T2	Vdet-IC	1.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B8C	-	S-80817CNUA-B8C-T2	Vdet-IC	1.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8D	-	S-80818CNUA-B8D-T2	Vdet-IC	1.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8E	-	S-80819CNUA-B8E-T2	Vdet-IC	1.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8F	-	S-80820CNUA-B8F-T2	Vdet-IC	2.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8G	-	S-80821CNUA-B8G-T2	Vdet-IC	2.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8H	-	S-80822CNUA-B8H-T2	Vdet-IC	2.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8I	-	S-80823CNUA-B8I-T2	Vdet-IC	2.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8J	-	S-80824CNUA-B8J-T2	Vdet-IC	2.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8K	-	S-80825CNUA-B8K-T2	Vdet-IC	2.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8L	-	S-80826CNUA-B8L-T2	Vdet-IC	2.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8M	-	S-80827CNUA-B8M-T2	Vdet-IC	2.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8N	-	S-80828CNUA-B8N-T2	Vdet-IC	2.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8O	-	S-80829CNUA-B8O-T2	Vdet-IC	2.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8P	-	S-80830CNUA-B8P-T2	Vdet-IC	3.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8Q	-	S-80831CNUA-B8Q-T2	Vdet-IC	3.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8R	-	S-80832CNUA-B8R-T2	Vdet-IC	3.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8S	-	S-80833CNUA-B8S-T2	Vdet-IC	3.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8T	-	S-80834CNUA-B8T-T2	Vdet-IC	3.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8U	-	S-80835CNUA-B8U-T2	Vdet-IC	3.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8V	-	S-80836CNUA-B8V-T2	Vdet-IC	3.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8W	-	S-80837CNUA-B8W-T2	Vdet-IC	3.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8X	-	S-80838CNUA-B8X-T2	Vdet-IC	3.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8Y	-	S-80839CNUA-B8Y-T2	Vdet-IC	3.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B8Z	-	S-80840CNUA-B8Z-T2	Vdet-IC	4.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B9	-	ELM89391A	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
B9	-	ELM9719NAB	Vdet-IC	1.9V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
B9	-	ELM9839AB	LVR-IC	3.9V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
B9	-	KIC3201S-29	LVR-IC	LDO, 2.9V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
B9	-	RT9169-20CX	LVR-IC	LDO, 2.0V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
B9	-	TC54VC1902MB	Vdet-IC	1.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
B93	-	XC61CC1902P	Vdet-IC	1.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
B93	-	XE61CC1945PR	Vdet-IC	1.9V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
B95	-	LN61FC1912P	Vdet-IC	1.9V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
B95	-	XC61FC1912P	Vdet-IC	1.9V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
B96	-	LN61FC1942P	Vdet-IC	1.9V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
B96	-	XC61FC1942P	Vdet-IC	1.9V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
B97	-	LN61FC1952P	Vdet-IC	1.9V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
B97	-	XC61FC1952P	Vdet-IC	1.9V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
B9A	-	S-80849CNUA-B9A-T2	Vdet-IC	4.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B9B	-	S-80850CNUA-B9B-T2	Vdet-IC	5.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B9C	-	S-80851CNUA-B9C-T2	Vdet-IC	5.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B9D	-	S-80852CNUA-B9D-T2	Vdet-IC	5.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B9E	-	S-80853CNUA-B9E-T2	Vdet-IC	5.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B9F	-	S-80854CNUA-B9F-T2	Vdet-IC	5.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B9G	-	S-80855CNUA-B9G-T2	Vdet-IC	5.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B9H	-	S-80856CNUA-B9H-T2	Vdet-IC	5.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B9I	-	S-80857CNUA-B9I-T2	Vdet-IC	5.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B9J	-	S-80858CNUA-B9J-T2	Vdet-IC	5.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B9K	-	S-80859CNUA-B9K-T2	Vdet-IC	5.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
B9L	-	S-80860CNUA-B9L-T2	Vdet-IC	6.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
BA	-	2SD1367-A	Si-npn	AF, 20V, 2A, 1W, B=100..200, 100MHz	SOT-89	20tb	-	4b	Ren
BA	-	AP432IY	Vref-IC	Adjustable, Precision, Shunt, 1.24V±1%	SOT-89-3L	20rb	RF1	4b	Ana
BA	-	BCX54	Si-npn	AF, 45V, 1A, 1W, B=40..250, >100MHz	SOT-89	20tb	-	4b	Phi
BA	-	ELM99301B	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
BA	-	RT9169-21CX	LVR-IC	LDO, 2.1V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BA15	-	AIC1722A-15CXT	LVR-IC	LDO, 1.5V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA15G	-	AIC1722A-15GXT	LVR-IC	LDO, 1.5V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA15P	-	AIC1722A-15PXT	LVR-IC	LDO, 1.5V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA18	-	AIC1722A-18CXT	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA18G	-	AIC1722A-18GXT	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA18P	-	AIC1722A-18PXT	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA20	-	AIC1722A-20CXT	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA20G	-	AIC1722A-20GXT	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA20P	-	AIC1722A-20PXT	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA25	-	AIC1722A-25CXT	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA25G	-	AIC1722A-25GXT	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA25P	-	AIC1722A-25PXT	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA27	-	AIC1722A-27CXT	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA27G	-	AIC1722A-27GXT	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA27P	-	AIC1722A-27PXT	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BA30	-	AIC1722A-30CXT	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA30G	-	AIC1722A-30GXT	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA30P	-	AIC1722A-30PXT	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA33	-	AIC1722A-33CXT	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA33G	-	AIC1722A-33GXT	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA33P	-	AIC1722A-33PXT	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA35	-	AIC1722A-35CXT	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA35G	-	AIC1722A-35GXT	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA35P	-	AIC1722A-35PXT	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA37	-	AIC1722A-37CXT	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA37G	-	AIC1722A-37GXT	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA37P	-	AIC1722A-37PXT	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA38	-	AIC1722A-38CXT	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA38G	-	AIC1722A-38GXT	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA38P	-	AIC1722A-38PXT	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA50	-	AIC1722A-50CXT	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA50G	-	AIC1722A-50GXT	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA50P	-	AIC1722A-50PXT	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA52	-	AIC1722A-52CXT	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA52G	-	AIC1722A-52GXT	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BA52P	-	AIC1722A-52PXT	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
BAP	-	2SB1132-P	Si-pnp	AF, 40V, 1A, 500mW, B=82..180, 150MHz	SOT-89	20tb	-	4b	Rhm
BAQ	-	2SB1132-Q	Si-pnp	AF, 40V, 1A, 500mW, B=120..270, 150MHz	SOT-89	20tb	-	4b	Rhm
BAR	-	2SB1132PT-R	Si-pnp	AF, Sw, 32V, 1A, B=180..390, 150MHz	SOT-89	20tb	-	4g	Chm
BAR	-	2SB1132-R	Si-pnp	AF, 40V, 1A, 500mW, B=180..390, 150MHz	SOT-89	20tb	-	4b	Rhm
BAS	-	2SB1118-S	Si-pnp	Lo-sat, 20V, 700mA, 500mW, B=140..280, 250MHz	PCP	20tb	-	4a	San
BAT	-	2SB1118-T	Si-pnp	Lo-sat, 20V, 700mA, 500mW, B=200..400, 250MHz	PCP	20tb	-	4a	San
BAU	-	2SB1118-U	Si-pnp	Lo-sat, 20V, 700mA, 500mW, B=280..560, 250MHz	PCP	20tb	-	4a	San
BB	-	2SD1367-B	Si-npn	AF, 20V, 2A, 1W, B=160..320, 100MHz	SOT-89	20tb	-	4b	Ren
BB	-	AP432IAY	Vref-IC	Adjustable, Precision, Shunt, 1.24V±0.5%	SOT-89-3L	20rb	RF1	4b	Ana
BB	-	BCX54-06	Si-npn	AF, 45V, 1A, 1W, B=40..100, >100MHz	SOT-89	20tb	-	4b	Inf
BB	-	ELM99311B	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
BB	-	RT9169-22CX	LVR-IC	LDO, 2.2V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BBR	-	2SB1119-R	Si-pnp	AF-Amp, 25V, 1A, 500mW, B=100..200, 180MHz	PCP	20tb	-	4a	San
BBS	-	2SB1119-S	Si-pnp	AF-Amp, 25V, 1A, 500mW, B=140..280, 180MHz	PCP	20tb	-	4a	San
BBT	-	2SB1119-T	Si-pnp	AF-Amp, 25V, 1A, 500mW, B=200..400, 180MHz	PCP	20tb	-	4a	San
BBU	-	2SB1119-U	Si-pnp	AF-Amp, 25V, 1A, 500mW, B=280..560, 180MHz	PCP	20tb	-	4a	San
BC	-	2SD1367-C	Si-npn	AF, 20V, 2A, 1W, B=250..500, 100MHz	SOT-89	20tb	-	4b	Ren
BC	-	BCX54-10	Si-npn	AF, 45V, 1A, 1W, B=63..160, >100MHz	SOT-89	20tb	-	4b	Phi
BC	-	ELM99321B	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
BC	-	RT9169-23CX	LVR-IC	LDO, 2.3V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BCE	-	2SB1120-E	Si-pnp	Relay-Drv, 20V, 2.5A, 1.3W, B=100..200, 250MHz	PCP	20tb	-	4a	San
BCF	-	2SB1120-F	Si-pnp	Relay-Drv, 20V, 2.5A, 1.3W, B=160..320, 250MHz	PCP	20tb	-	4a	San
BCG	-	2SB1120-G	Si-pnp	Relay-Drv, 20V, 2.5A, 1.3W, B=280..560, 250MHz	PCP	20tb	-	4a	San
BCp	-	BFQ591	Si-npn	RF, 25V, 200mA, 2.25W, B=60..250, 7GHz	SOT-89	20tb	-	4g	Phi
BCP	-	2SB1188-P	Si-pnp	AF, 40V, 2A, 500mW, B=82..180, >100MHz	SOT-89	20tb	-	4b	Rhm
BCQ	-	2SB1188-Q	Si-pnp	AF, 40V, 2A, 500mW, B=120..270, >100MHz	SOT-89	20tb	-	4b	Rhm
BCR	-	2SB1188-R	Si-pnp	AF, 40V, 2A, 500mW, B=180..390, >100MHz	SOT-89	20tb	-	4b	Rhm
BD	-	BCX54-16	Si-npn	AF, 45V, 1A, 1W, B=100..250, >100MHz	SOT-89	20tb	-	4b	Phi
BD	-	ELM99331B	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
BD	-	RT9169-24CX	LVR-IC	LDO, 2.4V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BDP	-	2SB1189-P	Si-pnp	AF, 80V, 800mA, 500mW, B=82..180, >100MHz	SOT-89	20tb	-	4b	Rhm
BDQ	-	2SB1189-Q	Si-pnp	AF, 80V, 800mA, 500mW, B=120..270, >100MHz	SOT-89	20tb	-	4b	Rhm
BDR	-	2SB1121-R	Si-pnp	Drv, 30V, 2A, 500mW, B=100..200, 150MHz	PCP	20tb	-	4a	San
BDR	-	2SB1189-R	Si-pnp	AF, 80V, 800mA, 500mW, B=180..390, >100MHz	SOT-89	20tb	-	4b	Rhm
BDS	-	2SB1121-S	Si-pnp	Drv, 30V, 2A, 500mW, B=140..280, 150MHz	PCP	20tb	-	4a	San
BDT	-	2SB1121-T	Si-pnp	Drv, 30V, 2A, 500mW, B=200..400, 150MHz	PCP	20tb	-	4a	San
BDU	-	2SB1121-U	Si-pnp	Drv, 30V, 2A, 500mW, B=280..560, 150MHz	PCP	20tb	-	4a	San
BE	-	2SC3443-E	Si-npn	Relay-Drv, 20V, 2A, 500mW, B=150..300, 80MHz	SOT-89	20tb	-	4a	Mit
BE	-	BCX55	Si-npn	AF, 60V, 1A, 1W, B=40..250, >100MHz	SOT-89	20tb	-	4b	Phi
BE	-	ELM99341B	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
BE	-	RT9169-25CX	LVR-IC	LDO, 2.5V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BE-	-	RT9169-25PX	LVR-IC	LDO, 2.5V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BEP	-	2SB1260-P	Si-pnp	AF, 80V, 1A, 500mW, B=82..180, >80MHz	SOT-89	20tb	-	4b	Rhm
BEQ	-	2SB1260-Q	Si-pnp	AF, 80V, 1A, 500mW, B=120..270, >80MHz	SOT-89	20tb	-	4b	Rhm
BER	-	2SB1122-R	Si-pnp	AF-Amp, 60V, 1A, 500mW, B=100..200, 150MHz	PCP	20tb	-	4a	San
BER	-	2SB1260-R	Si-pnp	AF, 80V, 1A, 500mW, B=180..390, >80MHz	SOT-89	20tb	-	4b	Rhm
BES	-	2SB1122-S	Si-pnp	AF-Amp, 60V, 1A, 500mW, B=140..280, 150MHz	PCP	20tb	-	4a	San
BET	-	2SB1122-T	Si-pnp	AF-Amp, 60V, 1A, 500mW, B=200..400, 150MHz	PCP	20tb	-	4a	San
BEU	-	2SB1122-U	Si-pnp	AF-Amp, 60V, 1A, 500mW, B=280..560, 150MHz	PCP	20tb	-	4a	San

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BF	-	2SC3443-F	Si-npn	Relay-Drv, 20V, 2A, 500mW, B=250..500, 80MHz	SOT-89	20tb	-	4a	Mit
BF	-	BCX55-06	Si-npn	AF-Drv, 60V, 1A, 1W, B=40..100, 100MHz	SOT-89	20tb	-	4b	Sie
BF	-	BCX55-6	Si-npn	AF, 60V, 1A, 1W, B=40..100, >100MHz	SOT-89	20tb	-	4b	Inf
BF	-	ELM99351B	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
BF	-	RT9169-26CX	LVR-IC	LDO, 2.6V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BF	-	XC62RP1502P	LVR-IC	LDO, 1.5V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
BF1	-	RXT-A64	Si-pnp-Darl	AF, Drv, 30V, 500mA, 1W, B=20000, 125MHz	SOT-89	20tb	-	4b	Rhm
BF2	-	RXT-A76	Si-pnp-Darl	AF, Drv, 50V, 500mA, 1W, B=20000, 125MHz	SOT-89	20tb	-	4b	Rhm
BFP	-	2SB1308-P	Si-pnp	Lo-sat, 30V, 3A, 0.5W, B=82..180, >120MHz	SOT-89	20tb	-	4b	Rhm
BFQ	-	2SB1308-Q	Si-pnp	Lo-sat, 30V, 3A, 0.5W, B=120..270, >120MHz	SOT-89	20tb	-	4b	Rhm
BFR	-	2SB1123-R	Si-pnp	Drv, 60V, 2A, 200mW, B=100..200, 150MHz	PCP	20tb	-	4a	San
BFR	-	2SB1308-R	Si-pnp	Lo-sat, 30V, 3A, 0.5W, B=180..390, >120MHz	SOT-89	20tb	-	4b	Rhm
BFS	-	2SB1123-S	Si-pnp	Drv, 60V, 2A, 200mW, B=140..280, 150MHz	PCP	20tb	-	4a	San
BFT	-	2SB1123-T	Si-pnp	Drv, 60V, 2A, 200mW, B=280..560, 150MHz	PCP	20tb	-	4a	San
BFU	-	2SB1123-U	Si-pnp	Drv, 60V, 2A, 200mW, B=280..560, 150MHz	PCP	20tb	-	4a	San
BG	-	2SC3443-G	Si-npn	Relay-Drv, 20V, 2A, 500mW, B=400..800, 80MHz	SOT-89	20tb	-	4a	Mit
BG	-	BCX55-10	Si-npn	AF, 60V, 1A, 1W, B=63..160, >100MHz	SOT-89	20tb	-	4b	Phi
BG	-	ELM99361B	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
BG	-	RT9169-27CX	LVR-IC	LDO, 2.7V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BGR	-	2SB1124-R	Si-pnp	Drv, 60V, 3A, 500mW, B=100..200, 150MHz	PCP	20tb	-	4a	San
BGS	-	2SB1124-S	Si-pnp	Drv, 60V, 3A, 500mW, B=140..280, 150MHz	PCP	20tb	-	4a	San
BGT	-	2SB1124-T	Si-pnp	Drv, 60V, 3A, 500mW, B=280..560, 150MHz	PCP	20tb	-	4a	San
BGU	-	2SB1124-U	Si-pnp	Drv, 60V, 3A, 500mW, B=280..560, 150MHz	PCP	20tb	-	4a	San
BH	-	2SB1001-H	Si-pnp	AF, 20V, 2A, 1W, B=100..200, 150MHz	SOT-89	20tb	-	4b	Ren
BH	-	2SB1125	Si-pnp-Darl	Drv, 80V, 700mA, 500mW, B>5000, 200MHz	PCP	20tb	-	4a	San
BH	-	BCX56	Si-npn	AF, 100V, 1A, 1W, B=40..250, >100MHz	SOT-89	20tb	-	4b	Phi
BH	-	ELM99371B	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
BH	-	RT9169-28CX	LVR-IC	LDO, 2.8V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BH	-	TFM1386	Si-pnp	AF, GP, 20V, 5A, 500mW, B=120..390, 120MHz	SOT-89	20tb	-	4g	Tfr
BH	-	TFM1424A	Si-pnp	AF, GP, 50V, 3A 600mW, B=82..560, 120MHz	SOT-89	20tb	-	4g	Tfr
BH	-	XC62RP1602P	LVR-IC	LDO, 1.6V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
BHP	-	2SB1386-P	Si-pnp	AF, 30V, 5A, 500mW, B=82..180, >120MHz	SOT-89	20tb	-	4b	Rhm
BHP	-	TFM1424AP	Si-pnp	AF, GP, 50V, 3A 600mW, B=82..180, 120MHz	SOT-89	20tb	-	4g	Tfr
BHQ	-	2SB1386-Q	Si-pnp	AF, 30V, 5A, 500mW, B=120..270, >120MHz	SOT-89	20tb	-	4b	Rhm
BHQ	-	TFM1386Q	Si-pnp	AF, GP, 20V, 5A, 500mW, B=120..270, 120MHz	SOT-89	20tb	-	4g	Tfr
BHQ	-	TFM1424AQ	Si-pnp	AF, GP, 50V, 3A 600mW, B=120..270, 120MHz	SOT-89	20tb	-	4g	Tfr
BHR	-	2SB1386-R	Si-pnp	AF, 30V, 5A, 500mW, B=180..390, >120MHz	SOT-89	20tb	-	4b	Rhm
BHR	-	TFM1386R	Si-pnp	AF, GP, 20V, 5A, 500mW, B=180..390, 120MHz	SOT-89	20tb	-	4g	Tfr
BHR	-	TFM1424AR	Si-pnp	AF, GP, 50V, 3A 600mW, B=180..390, 120MHz	SOT-89	20tb	-	4g	Tfr
BHS	-	TFM1424AS	Si-pnp	AF, GP, 50V, 3A 600mW, B=270..560, 120MHz	SOT-89	20tb	-	4g	Tfr
BI	-	2SB1126	Si-pnp-Darl	Drv, 80V, 1.5A, 500mW, B>4000, 120MHz	PCP	20tb	-	4a	San
BJ	-	2SB1001-J	Si-pnp	AF, 20V, 2A, 1W, B=160..320, 150MHz	SOT-89	20tb	-	4b	Ren
BJ	-	BCX56-06	Si-npn	AF-Drv, 80V, 1A, 1W, B=40..100, 100MHz	SOT-89	20tb	-	4b	Sie
BJ	-	BCX56-6	Si-npn	AF, 100V, 1A, 1W, B=40..100, >100MHz	SOT-89	20tb	-	4b	Inf
BJ	-	ELM99381B	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
BJ	-	KTD1302	Si-npn	GP, 25V, 300mA, 500mW, B=200..800, 60MHz	SOT-89	20tb	-	4a	Kec
BJ	-	RT9169-29CX	LVR-IC	LDO, 2.9V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BJE	-	2SB1427-E	Si-pnp	Hi-beta, 20V, 2A, 500mW, B=390..820, >90MHz	SOT-89	20tb	-	4b	Rhm
BJR	-	2SB1302-R	Si-pnp	DC/DC-Conv, 25V, 5A, 1.3W, B=100..200, 320MHz	PCP	20tb	-	4a	San
BJS	-	2SB1302-S	Si-pnp	DC/DC-Conv, 25V, 5A, 1.3W, B=140..280, 320MHz	PCP	20tb	-	4a	San
BJS	-	2SB1427-S	Si-pnp	Hi-beta, 20V, 2A, 500mW, B=270..560, >90MHz	SOT-89	20tb	-	4b	Rhm
BJT	-	2SB1302-T	Si-pnp	DC/DC-Conv, 25V, 5A, 1.3W, B=200..400, 320MHz	PCP	20tb	-	4a	San
BJU	-	2SB1427-U	Si-pnp	Hi-beta, 20V, 2A, 500mW, B=560..1200, >90MHz	SOT-89	20tb	-	4b	Rhm
BK	-	2SB1323	Si-pnp-Digi+Di	Motor-Driver, 40V, 3A, 1.5W, B>70, 100MHz, R1/R2=160Ω/800Ω	PCP	20tb	-	4a	San
BK	-	BCX56-10	Si-npn	AF, 100V, 1A, 1W, B=63..160, >100MHz	SOT-89	20tb	-	4b	Phi
BK	-	BCX56-10R	Si-npn	AF, 100V, 1A, 1.5W, B=63..160, >100MHz	SOT-89	20tb	-	4b	Ons
BK	-	ELM99391B	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
BK	-	RT9169-30CX	LVR-IC	LDO, 3.0V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BK	-	XC62RP1702P	LVR-IC	LDO, 1.7V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
BK-	-	RT9169-30PX	LVR-IC	LDO, 3.0V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BL	-	2SB1324	Si-pnp-Digi+Di	Motor-Driver, 40V, 3A, 1.5W, B>70, 100MHz, R2=800Ω	PCP	20tb	-	4a	San
BL	-	BCX56-16	Si-npn	AF, 100V, 1A, 1W, B=100..250, >100MHz	SOT-89	20tb	-	4b	Phi
BL	-	RT9169-31CX	LVR-IC	LDO, 3.1V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BL	-	XC62RP1802P	LVR-IC	LDO, 1.8V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
BLP	-	2SB1561-P	Si-pnp	Lo-sat, 60V, 2A, 500mW, B=82.180, >200MHz	SOT-89	20tb	-	4b	Rhm
BLQ	-	2SB1561-Q	Si-pnp	Lo-sat, 60V, 2A, 500mW, B=120..270, >200MHz	SOT-89	20tb	-	4b	Rhm
BM	-	2SB1325	Si-pnp-Digi+Di	Motor-Driver, 25V, 4A, 1.5W, B>70, 300MHz, R2=1.5kΩ	PCP	20tb	-	4a	San
BM	-	BCX55-16	Si-npn	AF, 60V, 1A, 1W, B=100..250, >100MHz	SOT-89	20tb	-	4b	Phi
BM	-	RT9169-32CX	LVR-IC	LDO, 3.2V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BM	-	XC62RP1902P	LVR-IC	LDO, 1.9V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BN	-	2SB1394	Si-pnp-Digi+Di	Motor-Driver, 40V, 3A, 1.5W, B>70, 100kHz, R1/R2=90Ω/800Ω	PCP	20tb	-	4a	San
BN	-	RT9169-33CX	LVR-IC	LDO, 3.3V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BN-	-	RT9169-33PX	LVR-IC	LDO, 3.3V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BO	-	2SA1200-O	Si-pnp	HV, 150V, 50mA, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4b	Tos
BO	-	KTA1660-O	Si-pnp	HV, Sw, 150V, 50mA, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4a	Kec
BOS	-	2SB1396-S	Si-pnp	DC/DC-Conv, 15V, 3A, 1.3W, B=140..280, 400MHz	PCP	20tb	-	4a	San
BOT	-	2SB1396-T	Si-pnp	DC/DC-Conv, 15V, 3A, 1.3W, B=200..400, 400MHz	PCP	20tb	-	4a	San
BOU	-	2SB1396-U	Si-pnp	DC/DC-Conv, 15V, 3A, 1.3W, B=280..560, 400MHz	PCP	20tb	-	4a	San
BP	-	2SB1397	Si-pnp-Digi+Di	Motor-Driver, 25V, 2A, 1.3W, B>70, 300MHz, R2=1.6kΩ	PCP	20tb	-	4a	San
BP	-	RT9169-34CX	LVR-IC	LDO, 3.4V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BQ	-	2SB766A-Q	Si-pnp	AF, 60V, 1A, 1W, B=85..170, 200MHz	SOT-89	20tb	-	4b	Pan
BQ	-	RT9169-35CX	LVR-IC	LDO, 3.5V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BR	-	2SB766A-R	Si-pnp	AF, 60V, 1A, 1W, B=120..240, 200MHz	SOT-89	20tb	-	4b	Pan
BR	-	RT9169-36CX	LVR-IC	LDO, 3.6V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BR1	-	BSR30	Si-pnp	AF, Sw, 70V, 1A, 1.35W, B=40..120, 100MHz	SOT-89	20tb	-	4b	Phi
BR2	-	BSR31	Si-pnp	AF, Sw, 70V, 1A, 1.35W, B=100..300, 100MHz	SOT-89	20tb	-	4b	Phi
BR3	-	BSR32	Si-pnp	AF, Sw, 90V, 1A, 1.35W, B=40..120, 100MHz	SOT-89	20tb	-	4b	Phi
BR4	-	BSR33	Si-pnp	AF, Sw, 90V, 1A, 1.35W, B=100..300, 100MHz	SOT-89	20tb	-	4b	Phi
BS	-	2SB766A-S	Si-pnp	AF, 60V, 1A, 1W, B=170..340, 200MHz	SOT-89	20tb	-	4b	Pan
BS	-	RT9169-37CX	LVR-IC	LDO, 3.7V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BS1	-	BST60	Si-pnp-Darl+Di	AF, 60V, 500mA, 1.3W, B>2000, 350MHz	SOT-89	20tb	-	4b	Phi
BS2	-	BST61	Si-pnp-Darl+Di	AF, 80V, 500mA, 1.3W, B>2000, 350MHz	SOT-89	20tb	-	4b	Phi
BS3	-	BST62	Si-pnp-Darl+Di	AF, 90V, 500mA, 1.3W, B>2000, 350MHz	SOT-89	20tb	-	4b	Phi
BT	-	2SB1048	Si-pnp-Darl	GP, 60V, 1A, 1W, B=2000..100000	UPAK	20tb	-	4b	Ren
BT	-	RT9169-38CX	LVR-IC	LDO, 3.8V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BT1	-	BST15	Si-pnp	AF, Sw, Vid, 200V, 1A, 1.3W, B=30..150, >15MHz	SOT-89	20tb	-	4b	Phi
BT2	-	BST16	Si-pnp	AF, Sw, Vid, 350V, 1A, 1.3W, B=30..120, >15MHz	SOT-89	20tb	-	4b	Phi
BU	-	2SD1005-U	Si-npn	AF-Amp, 100V, 1A, 2W, 160MHz, B=200..400	SOT-89	20tb	-	4a	Nec
BU	-	RT9169-39CX	LVR-IC	LDO, 3.9V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BV	-	2SD1005-V	Si-npn	AF-Amp, 100V, 1A, 2W, 160MHz, B=135..270	SOT-89	20tb	-	4a	Nec
BV	-	RT9169-40CX	LVR-IC	LDO, 4.0V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BV-	-	RT9169-40PX	LVR-IC	LDO, 4.0V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BW	-	2SD1005-W	Si-npn	AF-Amp, 100V, 1A, 2W, 160MHz, B=90..180	SOT-89	20tb	-	4a	Nec
BW	-	RT9169-41CX	LVR-IC	LDO, 4.1V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BX	-	RT9169-42CX	LVR-IC	LDO, 4.2V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BY	-	2SA1200-Y	Si-pnp	HV, 150V, 50mA, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4b	Tos
BY	-	2SK1334	n-MOSFET	V-MOS, 200V, 1A, <3.8Ω(0.5A), 13/17ns	SOT-89	20fa	-	4b	Ren
BY	-	KTA1660-Y	Si-pnp	HV, Sw, 150V, 50mA, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4a	Kec
BY	-	RT9169-43CX	LVR-IC	LDO, 4.3V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
BZ	-	RT9169-44CX	LVR-IC	LDO, 4.4V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
C	-	XMFP3-M3	n-FET	GaAs, UHF, 9V, 2.2A, 3.6W, Idss=1.2A(3V), 6GHz	SOT-89	20fh	-	4u	Mur
C0	-	AP130-41Y	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
C0	-	ELM89401A	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20eu	VR1	4a	Elm
C0	-	ELM9720NAB	Vdet-IC	2.0V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
C0	-	ELM9840AB	LVR-IC	4.0V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
C0	-	KIC3201S-30	LVR-IC	LDO, 3.0V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
C0	-	RT9169-45CX	LVR-IC	LDO, 4.5V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
C0	-	TC54VC2002MB	Vdet-IC	2.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
C03	-	XC61CC2002P	Vdet-IC	2.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
C03	-	XE61CC2045PR	Vdet-IC	2.0V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
C05	-	LN61FC2012P	Vdet-IC	2.0V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
C05	-	XC61FC2012P	Vdet-IC	2.0V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
C06	-	LN61FC2042P	Vdet-IC	2.0V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
C06	-	XC61FC2042P	Vdet-IC	2.0V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
C07	-	LN61FC2052P	Vdet-IC	2.0V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
C07	-	XC61FC2052P	Vdet-IC	2.0V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
C1	-	AP130-42Y	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
C1	-	ELM9721NAB	Vdet-IC	2.1V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
C1	-	ELM9841AB	LVR-IC	4.1V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
C1	-	KIC3201S-31	LVR-IC	LDO, 3.1V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
C1	-	RT9161-21CX	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
C1	-	TC54VC2102MB	Vdet-IC	2.1V±2%, -Reset PPO	SOT-89	20vda	VD6	4v	Mcc
C1-	-	RT9161-21PX	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
C11B	-	FC61C113PG	Vdet-IC	1.1V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C11B	-	ML61C113P	Vdet-IC	1.1V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C12B	-	FC61C123PG	Vdet-IC	1.2V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C12B	-	ML61C123P	Vdet-IC	1.2V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C13	-	XC61CC2102P	Vdet-IC	2.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
C13	-	XE61CC2145PR	Vdet-IC	2.1V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
C13B	-	FC61C133PG	Vdet-IC	1.3V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C13B	-	ML61C133P	Vdet-IC	1.3V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C14B	-	FC61C143PG	Vdet-IC	1.4V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C14B	-	ML61C143P	Vdet-IC	1.4V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C15	-	LN61FC2112P	Vdet-IC	2.1V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
C15	-	XC61FC2112P	Vdet-IC	2.1V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
C15B	-	FC61C153PG	Vdet-IC	1.5V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C15B	-	ML61C153P	Vdet-IC	1.5V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C16	-	LN61FC2142P	Vdet-IC	2.1V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
C16	-	XC61FC2142P	Vdet-IC	2.1V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
C16B	-	FC61C163PG	Vdet-IC	1.6V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C16B	-	ML61C163P	Vdet-IC	1.6V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C17	-	LN61FC2152P	Vdet-IC	2.1V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
C17	-	XC61FC2152P	Vdet-IC	2.1V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
C17B	-	FC61C173PG	Vdet-IC	1.7V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C17B	-	ML61C173P	Vdet-IC	1.7V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C18B	-	FC61C183PG	Vdet-IC	1.8V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C18B	-	ML61C183P	Vdet-IC	1.8V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C19B	-	FC61C193PG	Vdet-IC	1.9V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C19B	-	ML61C193P	Vdet-IC	1.9V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C2	-	AP130-43Y	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
C2	-	ELM9722NAB	Vdet-IC	2.2V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
C2	-	ELM9842AB	LVR-IC	4.2V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
C2	-	KIC3201S-32	LVR-IC	LDO, 3.2V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
C2	-	RT9169-46CX	LVR-IC	LDO, 4.6V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
C2	-	TC54VC2202MB	Vdet-IC	2.2V±2%, -Reset PPO	SOT-89	20vda	VD6	4v	Mcc
C20	ji	XC6381A201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C20B	-	FC61C202PG	Vdet-IC	2.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C20B	-	ML61C202P	Vdet-IC	2.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C21	ji	XC6381A211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C21B	-	FC61C212PG	Vdet-IC	2.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C21B	-	ML61C212P	Vdet-IC	2.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C22	ji	XC6381A221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C22B	-	FC61C222PG	Vdet-IC	2.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C22B	-	ML61C222P	Vdet-IC	2.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C23	-	XC61CC2202P	Vdet-IC	2.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
C23	-	XE61CC2245PR	Vdet-IC	2.2V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
C23	ji	XC6381A231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C23B	-	FC61C232PG	Vdet-IC	2.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C23B	-	ML61C232P	Vdet-IC	2.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C24	ji	XC6381A241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C24B	-	FC61C242PG	Vdet-IC	2.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C24B	-	ML61C242P	Vdet-IC	2.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C25	-	LN61FC2212P	Vdet-IC	2.2V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
C25	-	XC61FC2212P	Vdet-IC	2.2V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
C25	ji	XC6381A251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C25B	-	FC61C252PG	Vdet-IC	2.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C25B	-	ML61C252P	Vdet-IC	2.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C26	-	LN61FC2242P	Vdet-IC	2.2V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
C26	-	XC61FC2242P	Vdet-IC	2.2V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
C26	ji	XC6381A261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C26B	-	FC61C262PG	Vdet-IC	2.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C26B	-	ML61C262P	Vdet-IC	2.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C27	-	LN61FC2252P	Vdet-IC	2.2V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
C27	-	XC61FC2252P	Vdet-IC	2.2V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
C27	ji	XC6381A271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C27B	-	FC61C272PG	Vdet-IC	2.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C27B	-	ML61C272P	Vdet-IC	2.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C28	ji	XC6381A281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C28B	-	FC61C282PG	Vdet-IC	2.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C28B	-	ML61C282P	Vdet-IC	2.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C29	ji	XC6381A291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C29B	-	FC61C292PG	Vdet-IC	2.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C29B	-	ML61C292P	Vdet-IC	2.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C2A	-	S-812C20AUA-C2AT2G	LVR-IC	2.0V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2B	-	S-812C21AUA-C2BT2G	LVR-IC	2.1V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2C	-	S-812C22AUA-C2CT2G	LVR-IC	2.2V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2D	-	S-812C23AUA-C2DT2G	LVR-IC	2.3V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2E	-	S-812C24AUA-C2ET2G	LVR-IC	2.4V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2F	-	S-812C25AUA-C2FT2G	LVR-IC	2.5V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2G	-	S-812C26AUA-C2GT2G	LVR-IC	2.6V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C2H	-	S-812C27AUA-C2HT2G	LVR-IC	2.7V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2I	-	S-812C28AUA-C2IT2G	LVR-IC	2.8V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2J	-	S-812C29AUA-C2JT2G	LVR-IC	2.9V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2K	-	S-812C30AUA-C2KT2G	LVR-IC	3.0V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2L	-	S-812C31AUA-C2LT2G	LVR-IC	3.1V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2M	-	S-812C32AUA-C2MT2G	LVR-IC	3.2V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2N	-	S-812C33AUA-C2NT2G	LVR-IC	3.3V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2O	-	S-812C34AUA-C2OT2G	LVR-IC	3.4V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2P	-	S-812C35AUA-C2PT2G	LVR-IC	3.5V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2Q	-	S-812C36AUA-C2QT2G	LVR-IC	3.6V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2R	-	S-812C37AUA-C2RT2G	LVR-IC	3.7V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2S	-	S-812C38AUA-C2ST2G	LVR-IC	3.8V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2T	-	S-812C39AUA-C2TT2G	LVR-IC	3.9V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2U	-	S-812C40AUA-C2UT2G	LVR-IC	4.0V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2V	-	S-812C41AUA-C2VT2G	LVR-IC	4.1V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2W	-	S-812C42AUA-C2WT2G	LVR-IC	4.2V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2X	-	S-812C43AUA-C2XT2G	LVR-IC	4.3V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2Y	-	S-812C44AUA-C2YT2G	LVR-IC	4.4V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C2Z	-	S-812C45AUA-C2ZT2G	LVR-IC	4.5V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C3	-	AP130-44Y	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
C3	-	ELM9723NAB	Vdet-IC	2.3V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
C3	-	ELM9843AB	LVR-IC	4.3V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
C3	-	KIC3201S-33	LVR-IC	LDO, 3.3V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
C3	-	RT9169-47CX	LVR-IC	LDO, 4.7V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
C3	-	TC54VC2302MB	Vdet-IC	2.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
C30	ji	XC6381A301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C30B	-	FC61C302PG	Vdet-IC	3.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C30B	-	ML61C302P	Vdet-IC	3.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C31	ji	XC6381A311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C31B	-	FC61C312PG	Vdet-IC	3.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C31B	-	ML61C312P	Vdet-IC	3.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C32	ji	XC6381A321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C32B	-	FC61C322PG	Vdet-IC	3.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C32B	-	ML61C322P	Vdet-IC	3.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C33	-	XC61CC2302P	Vdet-IC	2.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
C33	-	XE61CC2345PR	Vdet-IC	2.3V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
C33	ji	XC6381A331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C33B	-	FC61C332PG	Vdet-IC	3.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C33B	-	ML61C332P	Vdet-IC	3.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C34	ji	XC6381A341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C34B	-	FC61C342PG	Vdet-IC	3.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C34B	-	ML61C342P	Vdet-IC	3.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C35	-	LN61FC2312P	Vdet-IC	2.3V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
C35	-	XC61FC2312P	Vdet-IC	2.3V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
C35	ji	XC6381A351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C35B	-	FC61C352PG	Vdet-IC	3.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C35B	-	ML61C352P	Vdet-IC	3.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C36	-	LN61FC2342P	Vdet-IC	2.3V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
C36	-	XC61FC2342P	Vdet-IC	2.3V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
C36	ji	XC6381A361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C36B	-	FC61C362PG	Vdet-IC	3.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C36B	-	ML61C362P	Vdet-IC	3.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C37	-	LN61FC2352P	Vdet-IC	2.3V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
C37	-	XC61FC2352P	Vdet-IC	2.3V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
C37	ji	XC6381A371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C37B	-	FC61C372PG	Vdet-IC	3.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C37B	-	ML61C372P	Vdet-IC	3.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C38	ji	XC6381A381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C38B	-	FC61C382PG	Vdet-IC	3.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C38B	-	ML61C382P	Vdet-IC	3.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C39	ji	XC6381A391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C39B	-	FC61C392PG	Vdet-IC	3.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C39B	-	ML61C392P	Vdet-IC	3.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C3A	-	S-812C46AUA-C3AT2G	LVR-IC	4.6V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C3B	-	S-812C47AUA-C3BT2G	LVR-IC	4.7V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C3C	-	S-812C48AUA-C3CT2G	LVR-IC	4.8V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C3D	-	S-812C49AUA-C3DT2G	LVR-IC	4.9V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C3E	-	S-812C50AUA-C3ET2G	LVR-IC	5.0V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C3F	-	S-812C51AUA-C3FT2G	LVR-IC	5.1V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C3G	-	S-812C52AUA-C3GT2G	LVR-IC	5.2V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C3H	-	S-812C53AUA-C3HT2G	LVR-IC	5.3V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C3I	-	S-812C54AUA-C3IT2G	LVR-IC	5.4V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C3J	-	S-812C55AUA-C3JT2G	LVR-IC	5.5V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C3K	-	S-812C56AUA-C3KT2G	LVR-IC	5.6V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C3L	-	S-812C57AUA-C3LT2G	LVR-IC	5.7V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C3M	-	S-812C58AUA-C3MT2G	LVR-IC	5.8V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C3N	-	S-812C59AUA-C3NT2G	LVR-IC	5.9V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C3O	-	S-812C60AUA-C3OT2G	LVR-IC	6.0V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C4	-	AP130-45Y	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
C4	-	ELM9724NAB	Vdet-IC	2.4V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
C4	-	ELM9844AB	LVR-IC	4.4V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
C4	-	KIC3201S-34	LVR-IC	LDO, 3.4V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
C4	-	RT9169-48CX	LVR-IC	LDO, 4.8V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
C4	-	TC54VC2402MB	Vdet-IC	2.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
C40	ji	XC6381A401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C40B	-	FC61C402PG	Vdet-IC	4.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C40B	-	ML61C402P	Vdet-IC	4.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C41	ji	XC6381A411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C41B	-	FC61C412PG	Vdet-IC	4.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C41B	-	ML61C412P	Vdet-IC	4.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C42	ji	XC6381A421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C42B	-	FC61C422PG	Vdet-IC	4.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C42B	-	ML61C422P	Vdet-IC	4.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C43	-	XC61CC2402P	Vdet-IC	2.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
C43	-	XE61CC2445PR	Vdet-IC	2.4V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
C43	ji	XC6381A431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C43B	-	FC61C432PG	Vdet-IC	4.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C43B	-	ML61C432P	Vdet-IC	4.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C44	ji	XC6381A441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C44B	-	FC61C442PG	Vdet-IC	4.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C44B	-	ML61C442P	Vdet-IC	4.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C45	-	LN61FC2412P	Vdet-IC	2.4V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
C45	-	XC61FC2412P	Vdet-IC	2.4V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
C45	ji	XC6381A451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C45B	-	FC61C452PG	Vdet-IC	4.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C45B	-	ML61C452P	Vdet-IC	4.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C46	-	LN61FC2442P	Vdet-IC	2.4V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
C46	-	XC61FC2442P	Vdet-IC	2.4V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
C46	ji	XC6381A461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C46B	-	FC61C462PG	Vdet-IC	4.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C46B	-	ML61C462P	Vdet-IC	4.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C47	-	LN61FC2452P	Vdet-IC	2.4V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
C47	-	XC61FC2452P	Vdet-IC	2.4V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
C47	ji	XC6381A471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C47B	-	FC61C472PG	Vdet-IC	4.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C47B	-	ML61C472P	Vdet-IC	4.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C48	ji	XC6381A481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C48B	-	FC61C482PG	Vdet-IC	4.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C48B	-	ML61C482P	Vdet-IC	4.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C49	ji	XC6381A491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C49B	-	FC61C492PG	Vdet-IC	4.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C49B	-	ML61C492P	Vdet-IC	4.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C5	-	AP130-46Y	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
C5	-	ELM9725NAB	Vdet-IC	2.5V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
C5	-	ELM9845AB	LVR-IC	4.5V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
C5	-	KIC3201S-35	LVR-IC	LDO, 3.5V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
C5	-	RT9169-49CX	LVR-IC	LDO, 4.9V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
C5	-	TC54VC2502MB	Vdet-IC	2.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
C50	ji	XC6381A501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C50B	-	FC61C502PG	Vdet-IC	5.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C50B	-	ML61C502P	Vdet-IC	5.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C51	ji	XC6381A511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C51B	-	FC61C512PG	Vdet-IC	5.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C51B	-	ML61C512P	Vdet-IC	5.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C52	ji	XC6381A521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C52B	-	FC61C522PG	Vdet-IC	5.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C52B	-	ML61C522P	Vdet-IC	5.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C53	-	XC61CC2502P	Vdet-IC	2.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
C53	-	XE61CC2545PR	Vdet-IC	2.5V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
C53	ji	XC6381A531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C53B	-	FC61C532PG	Vdet-IC	5.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C53B	-	ML61C532P	Vdet-IC	5.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C54	ji	XC6381A541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C54B	-	FC61C542PG	Vdet-IC	5.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C54B	-	ML61C542P	Vdet-IC	5.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C55	-	LN61FC2512P	Vdet-IC	2.5V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
C55	-	XC61FC2512P	Vdet-IC	2.5V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
C55	ji	XC6381A551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C55B	-	FC61C552PG	Vdet-IC	5.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C55B	-	ML61C552P	Vdet-IC	5.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C56	-	LN61FC2542P	Vdet-IC	2.5V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
C56	-	XC61FC2542P	Vdet-IC	2.5V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
C56	ji	XC6381A561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C56B	-	FC61C562PG	Vdet-IC	5.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C56B	-	ML61C562P	Vdet-IC	5.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C57	-	LN61FC2552P	Vdet-IC	2.5V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
C57	-	XC61FC2552P	Vdet-IC	2.5V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
C57	ji	XC6381A571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C57B	-	FC61C572PG	Vdet-IC	5.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C57B	-	ML61C572P	Vdet-IC	5.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C58	ji	XC6381A581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C58B	-	FC61C582PG	Vdet-IC	5.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C58B	-	ML61C582P	Vdet-IC	5.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C59	ji	XC6381A591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C59B	-	FC61C592PG	Vdet-IC	5.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C59B	-	ML61C592P	Vdet-IC	5.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C5P	-	S-812C33EUA-C5PT2G	LVR-IC	3.3V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C5Q	-	S-812C40EUA-C5QT2G	LVR-IC	4.0V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C5R	-	S-812C36EUA-C5RT2G	LVR-IC	3.6V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
C6	-	AP130-47Y	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
C6	-	ELM9726NAB	Vdet-IC	2.6V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
C6	-	ELM9846AB	LVR-IC	4.6V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
C6	-	KIC3201S-36	LVR-IC	LDO, 3.6V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
C6	-	RT9169-50CX	LVR-IC	LDO, 5.0V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
C6	-	TC54VC2602MB	Vdet-IC	2.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
C6-	-	RT9169-50PX	LVR-IC	LDO, 5.0V±2%, 100mA	SOT-89	20vl	VR1	4c	Rct
C60	ji	XC6381A601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C60B	-	FC61C602PG	Vdet-IC	6.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C60B	-	ML61C602P	Vdet-IC	6.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C61	ji	XC6381A611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C61B	-	FC61C612PG	Vdet-IC	6.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C61B	-	ML61C612P	Vdet-IC	6.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C62	ji	XC6381A621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C62B	-	FC61C622PG	Vdet-IC	6.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C62B	-	ML61C622P	Vdet-IC	6.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C63	-	XC61CC2602P	Vdet-IC	2.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
C63	-	XE61CC2645PR	Vdet-IC	2.6V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
C63	ji	XC6381A631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C63B	-	FC61C632PG	Vdet-IC	6.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C63B	-	ML61C632P	Vdet-IC	6.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C64	ji	XC6381A641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C64B	-	FC61C642PG	Vdet-IC	6.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C64B	-	ML61C642P	Vdet-IC	6.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C65	-	LN61FC2612P	Vdet-IC	2.6V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
C65	-	XC61FC2612P	Vdet-IC	2.6V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
C65	ji	XC6381A651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C65B	-	FC61C652PG	Vdet-IC	6.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C65B	-	ML61C652P	Vdet-IC	6.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C66	-	LN61FC2642P	Vdet-IC	2.6V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
C66	-	XC61FC2642P	Vdet-IC	2.6V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
C66	ji	XC6381A661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C66B	-	FC61C662PG	Vdet-IC	6.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C66B	-	ML61C662P	Vdet-IC	6.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C67	-	LN61FC2652P	Vdet-IC	2.6V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
C67	-	XC61FC2652P	Vdet-IC	2.6V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
C67	ji	XC6381A671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C67B	-	FC61C672PG	Vdet-IC	6.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C67B	-	ML61C672P	Vdet-IC	6.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C68	ji	XC6381A681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C68B	-	FC61C682PG	Vdet-IC	6.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C68B	-	ML61C682P	Vdet-IC	6.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C69	ji	XC6381A691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C69B	-	FC61C692PG	Vdet-IC	6.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C69B	-	ML61C692P	Vdet-IC	6.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C7	-	AP130-48Y	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
C7	-	ELM9727NAB	Vdet-IC	2.7V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
C7	-	ELM9847AB	LVR-IC	4.7V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
C7	-	KIC3201S-37	LVR-IC	LDO, 3.7V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
C7	-	RT9161-45CX	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
C7	-	TC54VC2702MB	Vdet-IC	2.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
C70	ji	XC6381A701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 155kHz	SOT-89	20bq	DC2	4h	Tor
C70B	-	FC61C702PG	Vdet-IC	7.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Fis
C70B	-	ML61C702P	Vdet-IC	7.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
C73	-	XC61CC2702P	Vdet-IC	2.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
C73	-	XE61CC2745PR	Vdet-IC	2.7V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
C75	-	LN61FC2712P	Vdet-IC	2.7V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
C75	-	XC61FC2712P	Vdet-IC	2.7V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
C76	-	LN61FC2742P	Vdet-IC	2.7V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
C76	-	XC61FC2742P	Vdet-IC	2.7V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
C77	-	LN61FC2752P	Vdet-IC	2.7V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
C77	-	XC61FC2752P	Vdet-IC	2.7V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
C8	-	AP130-49Y	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
C8	-	ELM9728NAB	Vdet-IC	2.8V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
C8	-	ELM9848AB	LVR-IC	4.8V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
C8	-	KIC3201S-38	LVR-IC	LDO, 3.8V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
C8	-	RT9161-47CX	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
C8	-	TC54VC2802MB	Vdet-IC	2.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
C83	-	XC61CC2802P	Vdet-IC	2.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
C83	-	XE61CC2845PR	Vdet-IC	2.8V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
C85	-	LN61FC2812P	Vdet-IC	2.8V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
C85	-	XC61FC2812P	Vdet-IC	2.8V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
C86	-	LN61FC2842P	Vdet-IC	2.8V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
C86	-	XC61FC2842P	Vdet-IC	2.8V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
C87	-	LN61FC2852P	Vdet-IC	2.8V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
C87	-	XC61FC2852P	Vdet-IC	2.8V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
C9	-	AP130-50Y	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
C9	-	ELM9729NAB	Vdet-IC	2.9V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
C9	-	ELM9849AB	LVR-IC	4.9V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
C9	-	KIC3201S-39	LVR-IC	LDO, 3.9V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
C9	-	RT9161-43CX	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
C9	-	TC54VC2902MB	Vdet-IC	2.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
C93	-	XC61CC2902P	Vdet-IC	2.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
C93	-	XE61CC2945PR	Vdet-IC	2.9V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
C95	-	LN61FC2912P	Vdet-IC	2.9V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
C95	-	XC61FC2912P	Vdet-IC	2.9V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
C96	-	LN61FC2942P	Vdet-IC	2.9V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
C96	-	XC61FC2942P	Vdet-IC	2.9V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
C97	-	LN61FC2952P	Vdet-IC	2.9V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
C97	-	XC61FC2952P	Vdet-IC	2.9V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
CA	-	2SD1368-A	Si-npn	AF, 100V, 1A, 1W, B=100..200, 100MHz	SOT-89	20tb	-	4b	Ren
CA	-	AP130-15Y	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CA	-	BCX68	Si-npn	AF, 25/20V, 1A, 1W, B=85..375, >100MHz	SOT-89	20tb	-	4b	Inf
CA	-	ELM99401B	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
CA	-	XC62RP2002P	LVR-IC	LDO, 2.0V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
CA18	-	AIC1734-18CXA	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA18G	-	AIC1734-18GXA	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA18P	-	AIC1734-18PXA	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA18P	-	SS6734-18GXA	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CA20	-	AIC1734-20CXA	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA20G	-	AIC1734-20GXA	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA20P	-	AIC1734-20PXA	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA20P	-	SS6734-20GXA	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CA25	-	AIC1734-25CXA	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA25G	-	AIC1734-25GXA	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA25P	-	AIC1734-25PXA	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA25P	-	SS6734-25GXA	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CA27	-	AIC1734-27CXA	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA27G	-	AIC1734-27GXA	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA27P	-	AIC1734-27PXA	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA27P	-	SS6734-27GXA	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CA30	-	AIC1734-30CXA	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA30G	-	AIC1734-30GXA	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA30P	-	AIC1734-30PXA	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA30P	-	SS6734-30GXA	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CA33	-	AIC1734-33CXA	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA33G	-	AIC1734-33GXA	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA33P	-	AIC1734-33PXA	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA33P	-	SS6734-33GXA	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CA35	-	AIC1734-35CXA	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA35G	-	AIC1734-35GXA	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA35P	-	AIC1734-35PXA	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA35P	-	SS6734-35GXA	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CA37	-	AIC1734-37CXA	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA37G	-	AIC1734-37GXA	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA37P	-	AIC1734-37PXA	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA37P	-	SS6734-37GXA	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CA38	-	AIC1734-38CXA	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA38G	-	AIC1734-38GXA	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA38P	-	AIC1734-38PXA	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA38P	-	SS6734-38GXA	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CA50	-	AIC1734-50CXA	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA50G	-	AIC1734-50GXA	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA50P	-	AIC1734-50PXA	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA50P	-	SS6734-50GXA	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CA52	-	AIC1734-52CXA	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA52G	-	AIC1734-52GXA	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA52P	-	AIC1734-52PXA	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-89	20vl	VR1	4g	Aic
CA52P	-	SS6734-52GXA	LVR-IC	LDO, 5.2V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CA9	-	LN61CC1002P	Vdet-IC	1.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAA	-	LN61CC1102P	Vdet-IC	1.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAB	-	FSP2114Y15AD	LVR-IC	LDO, 1.5V±3%, 250mA	SOT-89	20vl	VR1	4pd	Fsl
CAB	-	LN61CC1202P	Vdet-IC	1.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAC	-	BC868	Si-npn	GP, 32V, 1A, 1.35W, B=50..375, >40MHz	SOT-89	20tb	-	4b	Phi
CAC	-	FSP2114Y18AD	LVR-IC	LDO, 1.8V±3%, 250mA	SOT-89	20vl	VR1	4pd	Fsl
CAC	-	LN61CC1302P	Vdet-IC	1.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAD	-	FSP2114Y25AD	LVR-IC	LDO, 2.5V±3%, 250mA	SOT-89	20vl	VR1	4pd	Fsl
CAD	-	LN61CC1402P	Vdet-IC	1.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAE	-	FSP2114Y26AD	LVR-IC	LDO, 2.6V±3%, 250mA	SOT-89	20vl	VR1	4pd	Fsl
CAE	-	LN61CC1502P	Vdet-IC	1.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAF	-	FSP2114Y27AD	LVR-IC	LDO, 2.7V±3%, 250mA	SOT-89	20vl	VR1	4pd	Fsl
CAF	-	LN61CC1602P	Vdet-IC	1.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAG	-	FSP2114Y28AD	LVR-IC	LDO, 2.8V±3%, 250mA	SOT-89	20vl	VR1	4pd	Fsl
CAH	-	FSP2114Y285AD	LVR-IC	LDO, 2.85V±3%, 250mA	SOT-89	20vl	VR1	4pd	Fsl
CAH	-	LN61CC1702P	Vdet-IC	1.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAI	-	FSP2114Y30AD	LVR-IC	LDO, 3.0V±3%, 250mA	SOT-89	20vl	VR1	4pd	Fsl
CAJ	-	FSP2114Y33AD	LVR-IC	LDO, 3.3V±3%, 250mA	SOT-89	20vl	VR1	4pd	Fsl
CAK	-	FSP2114Y35AD	LVR-IC	LDO, 3.5V±3%, 250mA	SOT-89	20vl	VR1	4pd	Fsl
CAK	-	LN61CC1802P	Vdet-IC	1.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAL	-	FSP2114Y36AD	LVR-IC	LDO, 3.6V±3%, 250mA	SOT-89	20vl	VR1	4pd	Fsl
CAL	-	LN61CC1902P	Vdet-IC	1.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAM	-	LN61CC2002P	Vdet-IC	2.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAN	-	LN61CC2102P	Vdet-IC	2.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAP	-	LN61CC2202P	Vdet-IC	2.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAR	-	LN61CC2302P	Vdet-IC	2.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAR	jg	2SC3645-R	Si-npn	HV, Sw, 180V, 200mA, 500mW, B=100..200, >150MHz	PCP	20tb	-	4a	San
CAS	-	LN61CC2402P	Vdet-IC	2.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAS	jg	2SC3645-S	Si-npn	HV, Sw, 180V, 200mA, 500mW, B=140..280, >150MHz	PCP	20tb	-	4a	San
CAT	-	LN61CC2502P	Vdet-IC	2.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAT	jg	2SC3645-T	Si-npn	HV, Sw, 180V, 200mA, 500mW, B=200..400, >150MHz	PCP	20tb	-	4a	San
CAU	-	LN61CC2602P	Vdet-IC	2.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAV	-	LN61CC2702P	Vdet-IC	2.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAX	-	LN61CC2802P	Vdet-IC	2.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAY	-	LN61CC2902P	Vdet-IC	2.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CAZ	-	LN61CC3002P	Vdet-IC	3.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CB	-	2SD1368-B	Si-npn	AF, 100V, 1A, 1W, B=160..300, 100MHz	SOT-89	20tb	-	4b	Ren
CB	-	AP130-16Y	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CB	-	BCX68-10	Si-npn	AF, 25/20V, 1A, 1W, B=85..160, >100MHz	SOT-89	20tb	-	4b	Inf
CB	-	ELM99411B	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
CB	-	RXT2222A	Si-npn	AF, Drv, 40V, 600mA, 1W, B= 100..300, 300MHz	SOT-89	20tb	-	4i	Rhm
CB	-	TFM1053	Si-npn	AF, GP, 75V, 1.5A, 1W, B=300..820, 140MHz	SOT-89	20tb	-	4g	Tfr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CB	-	XC62RP2102P	LVR-IC	LDO, 2.1V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
CB0	-	LN61CC3102P	Vdet-IC	3.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CB1	-	LN61CC3202P	Vdet-IC	3.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CB18	-	AIC1734-18CXT	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB18G	-	AIC1734-18GXT	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB18P	-	AIC1734-18PXT	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB18P	-	SS6734-18GXT	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-89	20ch	VR1	4g	Ssc
CB2	-	LN61CC3302P	Vdet-IC	3.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CB20	-	AIC1734-20CXT	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB20G	-	AIC1734-20GXT	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB20P	-	AIC1734-20PXT	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB20P	-	SS6734-20GXT	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-89	20ch	VR1	4g	Ssc
CB25	-	AIC1734-25CXT	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB25G	-	AIC1734-25GXT	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB25P	-	AIC1734-25PXT	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB25P	-	SS6734-25GXT	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-89	20ch	VR1	4g	Ssc
CB27	-	AIC1734-27CXT	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB27G	-	AIC1734-27GXT	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB27P	-	AIC1734-27PXT	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB27P	-	SS6734-27GXT	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-89	20ch	VR1	4g	Ssc
CB3	-	LN61CC3402P	Vdet-IC	3.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CB30	-	AIC1734-30CXT	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB30G	-	AIC1734-30GXT	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB30P	-	AIC1734-30PXT	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB30P	-	SS6734-30GXT	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20ch	VR1	4g	Ssc
CB33	-	AIC1734-33CXT	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB33G	-	AIC1734-33GXT	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB33P	-	AIC1734-33PXT	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB33P	-	SS6734-33GXT	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20ch	VR1	4g	Ssc
CB35	-	AIC1734-35CXT	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB35G	-	AIC1734-35GXT	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB35P	-	AIC1734-35PXT	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB35P	-	SS6734-35GXT	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-89	20ch	VR1	4g	Ssc
CB37	-	AIC1734-37CXT	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB37G	-	AIC1734-37GXT	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB37P	-	AIC1734-37PXT	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB37P	-	SS6734-37GXT	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-89	20ch	VR1	4g	Ssc
CB38	-	AIC1734-38CXT	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB38G	-	AIC1734-38GXT	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB38P	-	AIC1734-38PXT	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB38P	-	SS6734-38GXT	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-89	20ch	VR1	4g	Ssc
CB4	-	LN61CC3502P	Vdet-IC	3.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CB5	-	LN61CC3602P	Vdet-IC	3.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CB50	-	AIC1734-50CXT	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB50G	-	AIC1734-50GXT	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB50P	-	AIC1734-50PXT	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB50P	-	SS6734-50GXT	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-89	20ch	VR1	4g	Ssc
CB52	-	AIC1734-52CXT	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB52G	-	AIC1734-52GXT	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB52P	-	AIC1734-52PXT	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-89	20ch	VR1	4g	Aic
CB52P	-	SS6734-52GXT	LVR-IC	LDO, 5.2V±2%, 500mA	SOT-89	20ch	VR1	4g	Ssc
CB6	-	LN61CC3702P	Vdet-IC	3.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CB7	-	LN61CC3802P	Vdet-IC	3.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CB8	-	LN61CC3902P	Vdet-IC	3.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CB9	-	LN61CC4002P	Vdet-IC	4.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBA	-	LN61CC4102P	Vdet-IC	4.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBB	-	LN61CC4202P	Vdet-IC	4.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBC	-	BC868-10	Si-npn	GP, 32V, 1A, 1.35W, B=75..150, >40MHz	SOT-89	20tb	-	4b	Phi
CBC	-	LN61CC4302P	Vdet-IC	4.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBD	-	LN61CC4402P	Vdet-IC	4.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBE	-	LN61CC4502P	Vdet-IC	4.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBF	-	LN61CC4602P	Vdet-IC	4.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBH	-	LN61CC4702P	Vdet-IC	4.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBK	-	LN61CC4802P	Vdet-IC	4.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBL	-	LN61CC4902P	Vdet-IC	4.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBM	-	LN61CC5002P	Vdet-IC	5.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBN	-	LN61CC5102P	Vdet-IC	5.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBP	-	2SC4132-P	Si-npn	Sw, 120V, 2A, 500mW, B=82..180, >80MHz	SOT-89	20tb	-	4b	Rhm
CBP	-	LN61CC5202P	Vdet-IC	5.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBQ	-	2SC4132-Q	Si-npn	Sw, 120V, 2A, 500mW, B=120..270, >80MHz	SOT-89	20tb	-	4b	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CBR	-	2SC3646-R	Si-npn	HV, Sw, 120V, 1A, 500mW, B=100..200, 120MHz	PCP	20tb	-	4a	San
CBR	-	2SC4132-R	Si-npn	Sw, 120V, 2A, 500mW, B=180..390, >80MHz	SOT-89	20tb	-	4b	Rhm
CBR	-	LN61CC5302P	Vdet-IC	5.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBS	-	2SC3646-S	Si-npn	HV, Sw, 120V, 1A, 500mW, B=140..280, 120MHz	PCP	20tb	-	4a	San
CBS	-	LN61CC5402P	Vdet-IC	5.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBS	-	TFM1053S	Si-npn	AF, GP, 75V, 1.5A, 1W, B=300..560, 140MHz	SOT-89	20tb	-	4g	Tfr
CBT	-	2SC3646-T	Si-npn	HV, Sw, 120V, 1A, 500mW, B=200..400, 120MHz	PCP	20tb	-	4a	San
CBT	-	LN61CC5502P	Vdet-IC	5.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBT	-	TFM1053T	Si-npn	AF, GP, 75V, 1.5A, 1W, B=390..820, 140MHz	SOT-89	20tb	-	4g	Tfr
CBU	-	LN61CC5602P	Vdet-IC	5.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBV	-	LN61CC5702P	Vdet-IC	5.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBX	-	LN61CC5802P	Vdet-IC	5.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBY	-	LN61CC5902P	Vdet-IC	5.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CBZ	-	LN61CC6002P	Vdet-IC	6.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4p	Nln
CC	-	2SA1364-C	Si-pnp	Relay-Drv, 60V, 1A, 500mW, B=55..110, 80MHz	SOT-89	20tb	-	4b	Mit
CC	-	2SD1368-C	Si-npn	AF, 100V, 1A, 1W, B=250..300, 100MHz	SOT-89	20tb	-	4b	Ren
CC	-	AP130-17Y	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CC	-	BCX68-16	Si-npn	AF, 25/20V, 1A, 1W, B=100..250, >100MHz	SOT-89	20tb	-	4b	Inf
CC	-	XC62RP2202P	LVR-IC	LDO, 2.2V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
-CC	-	BCX68-16	Si-npn	AF, 25/20V, 1A, 1W, B=100..250, >100MHz	SOT-89	20tb	-	4b	Zx
CCC	-	BC868-16	Si-npn	GP, 32V, 1A, 1.35W, B=100..250, >40MHz	SOT-89	20tb	-	4b	Phi
CCR	-	2SC3647-R	Si-npn	HV, Sw, 120V, 2A, 500mW, B=100..200, 120MHz	PCP	20tb	-	4a	San
CCS	-	2SC3647-S	Si-npn	HV, Sw, 120V, 2A, 500mW, B=140..280, 120MHz	PCP	20tb	-	4a	San
CCT	-	2SC3647-T	Si-npn	HV, Sw, 120V, 2A, 500mW, B=200..400, 120MHz	PCP	20tb	-	4a	San
CD	-	2SA1364-D	Si-pnp	Relay-Drv, 60V, 1A, 500mW, B=90..180, 80MHz	SOT-89	20tb	-	4b	Mit
CD	-	AP130-18Y	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CD	-	BCX68-25	Si-npn	AF, 25/20V, 1A, 1W, B=160..375, >100MHz	SOT-89	20tb	-	4b	Inf
CD	-	ELM99421B	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
CD	-	RXT3904	Si-npn	GP, 60V, 200mA, 200mW, B= 100..300, >300MHz	SOT-89	20tb	-	4i	Rhm
CD	-	XC62RP2302P	LVR-IC	LDO, 2.3V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
-CD	-	BCX68-25	Si-npn	AF, 25/20V, 1A, 1W, B=160..375, >100MHz	SOT-89	20tb	-	4b	Zx
CDC	-	2SC4673-C	Si-npn	UHF, LN, 20V, 100mA, 400mW, B=40..80, 4.5GHz	PCP	20tb	-	4a	San
CDC	-	BC868-25	Si-npn	GP, 32V, 1A, 1.35W, B=160..375, >40MHz	SOT-89	20tb	-	4b	Phi
CDD	-	2SC4673-D	Si-npn	UHF, LN, 20V, 100mA, 400mW, B=60..120, 4.5GHz	PCP	20tb	-	4a	San
CDE	-	2SC4673-E	Si-npn	UHF, LN, 20V, 100mA, 400mW, B=100..200, 4.5GHz	PCP	20tb	-	4a	San
CDR	-	2SC3648-R	Si-npn	AF-Drv, 180V, 700mA, 500mW, B=100..200, 120MHz	PCP	20tb	-	4a	San
CDS	-	2SC3648-S	Si-npn	AF-Drv, 180V, 700mA, 500mW, B=140..280, 120MHz	PCP	20tb	-	4a	San
CDT	-	2SC3648-T	Si-npn	AF-Drv, 180V, 700mA, 500mW, B=200..400, 120MHz	PCP	20tb	-	4a	San
CE	-	2SA1364-E	Si-pnp	Relay-Drv, 60V, 1A, 500mW, B=150..300, 80MHz	SOT-89	20tb	-	4b	Mit
CE	-	AP130-19Y	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CE	-	BCX69	Si-pnp	AF, 25/20V, 1A, 1W, B=85..375, >100MHz	SOT-89	20tb	-	4b	Zx
CE	-	ELM99431B	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
CE	-	ELM99441B	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
CE	-	XC62RP2402P	LVR-IC	LDO, 2.4V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
-CE	-	BCX68	Si-npn	AF, 25/20V, 1A, 1W, B=85..375, >100MHz	SOT-89	20tb	-	4b	Zx
CEC	-	BC869	Si-pnp	GP, 32V, 1A, 1.35W, B=50..375, >40MHz	SOT-89	20tb	-	4b	Phi
CEP	-	2SC4505-P	Si-npn	Sw, 400V, 100mA, 2W, 20MHz, B=82..180	MPT3	20tb	-	4b	Rhm
CEQ	-	2SC4505-Q	Si-npn	Sw, 400V, 100mA, 2W, 20MHz, B=120..270	MPT3	20tb	-	4b	Rhm
CER	-	2SC3649-R	Si-npn	HV, Sw, 180V, 1.5A, 500mW, B=100..200, 120MHz	PCP	20tb	-	4a	San
CES	-	2SC3649-S	Si-npn	HV, Sw, 180V, 1.5A, 500mW, B=140..280, 120MHz	PCP	20tb	-	4a	San
CET	-	2SC3649-T	Si-npn	HV, Sw, 180V, 1.5A, 500mW, B=200..400, 120MHz	PCP	20tb	-	4a	San
CF	-	2SC3650	Si-npn	AF-Amp, 30V, 1.2A, 500mW, B=800..3200, 220MHz	PCP	20tb	-	4a	San
CF	-	AP130-20Y	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CF	-	BCX69-10	Si-pnp	AF, 25/20V, 1A, 1W, B=85..160, >100MHz	SOT-89	20tb	-	4b	Inf
CF	-	ELM99451B	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
CF	-	RT9161A-42CX	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
CF	-	TFM2150A	Si-npn	AF, GP, 50V, 3A 600mW, B=120..820, 90MHz	SOT-89	20tb	-	4g	Tfr
CF	-	XC62RP2502P	LVR-IC	LDO, 2.5V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
CF-	-	RT9161A-42PX	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
CF15	-	AIC1735-15CX	LVR-IC	LDO, 1.5V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF15G	-	AIC1735-15GX	LVR-IC	LDO, 1.5V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF15P	-	AIC1735-15PX	LVR-IC	LDO, 1.5V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF18	-	AIC1735-18CX	LVR-IC	LDO, 1.8V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF18G	-	AIC1735-18GX	LVR-IC	LDO, 1.8V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF18P	-	AIC1735-18PX	LVR-IC	LDO, 1.8V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF18P	-	SS6735-18GX	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CF20	-	AIC1735-20CX	LVR-IC	LDO, 2.0V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF20G	-	AIC1735-20GX	LVR-IC	LDO, 2.0V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF20P	-	AIC1735-20PX	LVR-IC	LDO, 2.0V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF20P	-	SS6735-20GX	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CF25	-	AIC1735-25CX	LVR-IC	LDO, 2.5V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF25G	-	AIC1735-25GX	LVR-IC	LDO, 2.5V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF25P	-	AIC1735-25PX	LVR-IC	LDO, 2.5V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF25P	-	SS6735-25GX	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CF27	-	AIC1735-27CX	LVR-IC	LDO, 2.7V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF27G	-	AIC1735-27GX	LVR-IC	LDO, 2.7V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF27P	-	AIC1735-27PX	LVR-IC	LDO, 2.7V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF27P	-	SS6735-27GX	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CF30	-	AIC1735-30CX	LVR-IC	LDO, 3.0V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF30G	-	AIC1735-30GX	LVR-IC	LDO, 3.0V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF30P	-	AIC1735-30PX	LVR-IC	LDO, 3.0V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF30P	-	SS6735-30GX	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CF33	-	AIC1735-33CX	LVR-IC	LDO, 3.3V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF33G	-	AIC1735-33GX	LVR-IC	LDO, 3.3V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF33P	-	AIC1735-33PX	LVR-IC	LDO, 3.3V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF33P	-	SS6735-33GX	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CF35	-	AIC1735-35CX	LVR-IC	LDO, 3.5V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF35G	-	AIC1735-35GX	LVR-IC	LDO, 3.5V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF35P	-	AIC1735-35PX	LVR-IC	LDO, 3.5V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF35P	-	SS6735-35GX	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CF37	-	AIC1735-37CX	LVR-IC	LDO, 3.7V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF37G	-	AIC1735-37GX	LVR-IC	LDO, 3.7V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF37P	-	AIC1735-37PX	LVR-IC	LDO, 3.7V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF37P	-	SS6735-37GX	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CF38	-	AIC1735-38CX	LVR-IC	LDO, 3.8V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF38G	-	AIC1735-38GX	LVR-IC	LDO, 3.8V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF38P	-	AIC1735-38PX	LVR-IC	LDO, 3.8V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF38P	-	SS6735-38GX	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CF50	-	AIC1735-50CX	LVR-IC	LDO, 5.0V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF50G	-	AIC1735-50GX	LVR-IC	LDO, 5.0V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF50P	-	AIC1735-50PX	LVR-IC	LDO, 5.0V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF50P	-	SS6735-50GX	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CF52	-	AIC1735-52CX	LVR-IC	LDO, 5.2V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF52G	-	AIC1735-52GX	LVR-IC	LDO, 5.2V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF52P	-	AIC1735-52PX	LVR-IC	LDO, 5.2V±1%, 500mA	SOT-89	20vl	VR1	4g	Aic
CF52P	-	SS6735-52GX	LVR-IC	LDO, 5.2V±2%, 500mA	SOT-89	20vl	VR1	4g	Ssc
CFC	-	BC869-10	Si-pnp	AF-Drv, 25V, 1A, 1W, B>160, >40MHz	SOT-89	20tb	-	4b	Phi
CFQ	-	2SD2150-Q	Si-npn	AF-Drv, 40V, 3A, 500mW, B=120..270, 290MHz	SOT-89	20tb	-	4b	Rhm
CFQ	-	TFM2150AQ	Si-npn	AF, GP, 50V, 3A 600mW, B=120..270, 90MHz	SOT-89	20tb	-	4g	Tfr
CFR	-	2SD2150-R	Si-npn	AF-Drv, 40V, 3A, 500mW, B=180..390, 290MHz	SOT-89	20tb	-	4b	Rhm
CFR	-	TFM2150AR	Si-npn	AF, GP, 50V, 3A 600mW, B=180..390, 90MHz	SOT-89	20tb	-	4g	Tfr
CFS	-	2SD2150-S	Si-npn	AF-Drv, 40V, 3A, 500mW, B=270..560, 290MHz	SOT-89	20tb	-	4b	Rhm
CFS	-	TFM2150AS	Si-npn	AF, GP, 50V, 3A 600mW, B=270..560, 90MHz	SOT-89	20tb	-	4g	Tfr
CFT	-	TFM2150AT	Si-npn	AF, GP, 50V, 3A 600mW, B=390..820, 90MHz	SOT-89	20tb	-	4g	Tfr
CG	-	2SC3651	Si-npn	AF-Amp, 120V, 200mA, 500mW, B=500..2000, 150MHz	PCP	20tb	-	4a	San
CG	-	AP130-21Y	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CG	-	BCX69-16	Si-pnp	AF, 25/20V, 1A, 1W, B=100..250, >100MHz	SOT-89	20tb	-	4b	Inf
CG	-	ELM99461B	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
CG	-	RT9161A-50CX	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
-CG	-	BCX69-16	Si-pnp	AF, 25/20V, 1A, 1W, B=100..250, >100MHz	SOT-89	20tb	-	4b	Zx
CG-	-	RT9161A-50PX	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
CGC	-	BC869-16	Si-pnp	GP, 32V, 1A, 1.35W, B=100..250, >40MHz	SOT-89	20tb	-	4b	Phi
CGP	-	2SC5053-P	Si-npn	Sw, 60V, 1A, 500mW, B=82..180, >150MHz	SOT-89	20tb	-	4b	Rhm
CGQ	-	2SC5053-Q	Si-npn	Sw, 60V, 1A, 500mW, B=120..270, >150MHz	SOT-89	20tb	-	4b	Rhm
CGR	-	2SC5053-R	Si-npn	Sw, 60V, 1A, 500mW, B=180..390, >150MHz	SOT-89	20tb	-	4b	Rhm
CH	-	2SB1002-H	Si-pnp	AF, 70V, 1A, 1W, B=100..200, 150MHz	SOT-89	20tb	-	4b	Ren
CH	-	AP130-22Y	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CH	-	BCX69-25	Si-pnp	AF, 25/20V, 1A, 1W, B=160..375, >100MHz	SOT-89	20tb	-	4b	Inf
CH	-	ELM99471B	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
CH	-	RT9162-33CXL	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4g	Rct
CH	-	XC62RP2602P	LVR-IC	LDO, 2.6V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
-CH	-	BCX69-25	Si-pnp	AF, 25/20V, 1A, 1W, B=160..375, >100MHz	SOT-89	20tb	-	4b	Zx
CHC	-	BC869-25	Si-pnp	GP, 32V, 1A, 1.35W, B=160..375, >40MHz	SOT-89	20tb	-	4b	Phi
CHD	-	2SC4272-D	Si-npn	27MHz-CB, 75V, 1A, Pq=1.8W(27MHz), B=60..120, 250MHz	PCP	20tb	-	4a	San
CHE	-	2SC4272-E	Si-npn	27MHz-CB, 75V, 1A, Pq=1.8W(27MHz), B=100..200, 250MHz	PCP	20tb	-	4a	San
CHF	-	2SC4272-F	Si-npn	27MHz-CB, 75V, 1A, Pq=1.8W(27MHz), B=160..320, 250MHz	PCP	20tb	-	4a	San
CI	-	AP130-23Y	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CIC	-	2SC4080-C	Si-npn	Vid, HF, 200V, 100mA, 500mW, B=40..80, 400MHz	SOT-89	20tb	-	4a	San
CID	-	2SC4080-D	Si-npn	Vid, HF, 200V, 100mA, 500mW, B=60..120, 400MHz	SOT-89	20tb	-	4a	San
CIE	-	2SC4080-E	Si-npn	Vid, HF, 200V, 100mA, 500mW, B=100..200, 400MHz	SOT-89	20tb	-	4a	San

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CIF	-	2SC4080-F	Si-npn	Vid, HF, 200V, 100mA, 500mW, B=160..320, 400MHz	SOT-89	20tb	-	4a	San
CJ	-	2SB1002-J	Si-pnp	AF, 70V, 1A, 1W, B=160..320, 150MHz	SOT-89	20tb	-	4b	Ren
CJ	-	2SC4390	Si-npn	Hi-beta, AF, 20V, 2A, 500mW, B=800..3200, 260MHz	PCP	20tb	-	4a	San
CJ	-	AP130-24Y	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CJ	-	ELM99481B	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
CJ	-	RT9162-35CXL	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Rct
-CJ	-	BCX69	Si-pnp	AF, 25/20V, 1A, 1W, B=85..375, >100MHz	SOT-89	20tb	-	4b	Zx
CK	-	2SD999-K	Si-npn	AF-Drv, 30V, 1A, 2W, B=200..400, 130MHz	SOT-89	20tb	-	4b	Nec
CK	-	AP130-25Y	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CK	-	ELM99491B	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
CK	-	RT9163-33CXL	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20vl	VR1	4g	Rct
CK	-	XC62RP2702P	LVR-IC	LDO, 2.7V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
CK-	-	RT9163-33PXL	LVR-IC	LDO, 3.3V±2%, 500mA, Pb-free	SOT-89	20vl	VR1	4g	Rct
CKR	-	2SC4520-R	Si-npn	Sw, Hi-Sp, 60V, 1.5A, 1.3W, B=100..200, 300MHz, 50/180ns	PCP	20tb	-	4a	San
CKS	-	2SC4520-S	Si-npn	Sw, Hi-Sp, 60V, 1.5A, 1.3W, B=140..280, 300MHz, 50/180ns	PCP	20tb	-	4a	San
CKT	-	2SC4520-T	Si-npn	Sw, Hi-Sp, 60V, 1.5A, 1.3W, B=200..400, 300MHz, 50/180ns	PCP	20tb	-	4a	San
CL	-	2SD999-L	Si-npn	AF-Drv, 30V, 1A, 2W, B=135..270, 130MHz	SOT-89	20tb	-	4b	Nec
CL	-	AP130-26Y	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CL	-	RT9163-35CXL	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20vl	VR1	4g	Rct
CL	-	XC62RP2802P	LVR-IC	LDO, 2.8V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
CLR	-	2SC4521-R	Si-npn	Sw, Hi-Sp, 60V, 3A, 1.5W, B=100..200, 300MHz, 50/180ns	PCP	20tb	-	4a	San
CLS	-	2SC4521-S	Si-npn	Sw, Hi-Sp, 60V, 3A, 1.5W, B=140..280, 300MHz, 50/180ns	PCP	20tb	-	4a	San
CLT	-	2SC4521-T	Si-npn	Sw, Hi-Sp, 60V, 3A, 1.5W, B=200..400, 300MHz, 50/180ns	PCP	20tb	-	4a	San
CM	-	2SD999-M	Si-npn	AF-Drv, 30V, 1A, 2W, B=90..180, 130MHz	SOT-89	20tb	-	4b	Nec
CM	-	AP130-27Y	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CM	-	RT9163-50CXL	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20vl	VR1	4g	Rct
CM	-	XC62RP2902P	LVR-IC	LDO, 2.9V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
CMC	-	2SC4504-C	Si-npn	Vid-Drv, 30V, 300mA, 500mW, B=40..80, 2.2GHz	PCP	20tb	-	4a	San
CMD	-	2SC4504-D	Si-npn	Vid-Drv, 30V, 300mA, 500mW, B=60..120, 2.2GHz	PCP	20tb	-	4a	San
CME	-	2SC4504-E	Si-npn	Vid-Drv, 30V, 300mA, 500mW, B=100..200, 2.2GHz	PCP	20tb	-	4a	San
CN	-	AP130-28Y	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CN	-	RT9161-44CX	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
CN9	-	LN61CN1002P	Vdet-IC	1.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNA	-	LN61CN1102P	Vdet-IC	1.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNB	-	LN61CN1202P	Vdet-IC	1.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNC	-	LN61CN1302P	Vdet-IC	1.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CND	-	2SC4548-D	Si-npn	HV, Drv, 400V, 200mA, 1.3W, B=60..120, 70MHz	PCP	20tb	-	4a	San
CND	-	LN61CN1402P	Vdet-IC	1.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNE	-	2SC4548-E	Si-npn	HV, Drv, 400V, 200mA, 1.3W, B=100..200, 70MHz	PCP	20tb	-	4a	San
CNE	-	LN61CN1502P	Vdet-IC	1.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNF	-	LN61CN1602P	Vdet-IC	1.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNH	-	LN61CN1702P	Vdet-IC	1.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNK	-	LN61CN1802P	Vdet-IC	1.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNL	-	LN61CN1902P	Vdet-IC	1.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNM	-	LN61CN2002P	Vdet-IC	2.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNN	-	LN61CN2102P	Vdet-IC	2.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNP	-	LN61CN2202P	Vdet-IC	2.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNR	-	LN61CN2302P	Vdet-IC	2.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNS	-	LN61CN2402P	Vdet-IC	2.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNT	-	LN61CN2502P	Vdet-IC	2.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNU	-	LN61CN2602P	Vdet-IC	2.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNV	-	LN61CN2702P	Vdet-IC	2.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNX	-	LN61CN2802P	Vdet-IC	2.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNY	-	LN61CN2902P	Vdet-IC	2.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CNZ	-	LN61CN3002P	Vdet-IC	3.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CO	-	2SC2881-O	Si-npn	HV, 120V, 80mA, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4b	Tos
CO	-	AP130-29Y	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CO	-	KTC4373-O	Si-npn	AF-Drv, 120V, 800mA, 1W, B=80..160, 120MHz	SOT-89	20tb	-	4a	Kec
CP	-	2SB767-P	Si-pnp	AF, 80V, 1A, 1W, B=70..130, 120MHz	SOT-89	20tb	-	4b	Pan
CP	-	2SC4705	Si-npn	AF-Amp, 60V, 200mA, 1.3W, 250MHz, B=800..3200	PCP	20tb	-	4a	San
CP	-	AP130-30Y	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CP0	-	LN61CN3102P	Vdet-IC	3.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CP1	-	LN61CN3202P	Vdet-IC	3.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CP2	-	LN61CN3302P	Vdet-IC	3.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CP3	-	LN61CN3402P	Vdet-IC	3.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CP4	-	LN61CN3502P	Vdet-IC	3.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CP5	-	LN61CN3602P	Vdet-IC	3.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CP6	-	LN61CN3702P	Vdet-IC	3.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CP7	-	LN61CN3802P	Vdet-IC	3.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln
CP8	-	LN61CN3902P	Vdet-IC	3.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	Nln





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CP9	-	LN61CN4002P	Vdet-IC	4.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPA	-	LN61CN4102P	Vdet-IC	4.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPB	-	LN61CN4202P	Vdet-IC	4.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPC	-	LN61CN4302P	Vdet-IC	4.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPD	-	LN61CN4402P	Vdet-IC	4.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPE	-	LN61CN4502P	Vdet-IC	4.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPF	-	LN61CN4602P	Vdet-IC	4.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPH	-	LN61CN4702P	Vdet-IC	4.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPK	-	LN61CN4802P	Vdet-IC	4.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPL	-	LN61CN4902P	Vdet-IC	4.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPM	-	LN61CN5002P	Vdet-IC	5.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPN	-	LN61CN5102P	Vdet-IC	5.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPP	-	LN61CN5202P	Vdet-IC	5.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPR	-	LN61CN5302P	Vdet-IC	5.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPS	-	LN61CN5402P	Vdet-IC	5.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPT	-	LN61CN5502P	Vdet-IC	5.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPU	-	LN61CN5602P	Vdet-IC	5.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPV	-	LN61CN5702P	Vdet-IC	5.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPX	-	LN61CN5802P	Vdet-IC	5.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPY	-	LN61CN5902P	Vdet-IC	5.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CPZ	-	LN61CN6002P	Vdet-IC	6.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4p	NIn
CQ	-	2SB767-Q	Si-pnp	AF, 80V, 1A, 1W, B=90..155, 120MHz	SOT-89	20tb	-	4b	Pan
CQ	-	AP130-31Y	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CR	-	2SB767-R	Si-pnp	AF, 80V, 1A, 1W, B=130..200, 120MHz	SOT-89	20tb	-	4b	Pan
CR	-	2SC4422	Si-npn	UHF, 15V, 50mA, 400mW, B=50..250, >4.5GHz	SOT-89	20tb	-	4b	Ren
CR	-	AP130-32Y	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CR	-	RT9161-165CX	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
CS	-	2SB767-S	Si-pnp	AF, 80V, 1A, 1W, B=90..155, 120MHz	SOT-89	20tb	-	4b	Pan
CS	-	2SD1870	Si-npn	Hi-beta, 30V, 1A, B=1000..3000	SOT-89	20tb	-	4b	Ren
CS	-	AP130-33Y	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CS	-	RT9161-195CX	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
CT	-	2SD1472	Si-npn-Darl+Di	GP, 120V, 1.5A, 1W, B=2000..30k	SOT-89	20te	-	4b	Ren
CT	-	AP130-34Y	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CT	-	RT9161-18CX	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
CT-	-	RT9161-18PX	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
CTS	-	2SC4984-S	Si-npn	AF-Amp, 15V, 300mA, 1.3W, B=140..280, 200MHz	PCP	20tb	-	4a	San
CTT	-	2SC4984-T	Si-npn	AF-Amp, 15V, 300mA, 1.3W, B=200..400, 200MHz	PCP	20tb	-	4a	San
CTU	-	2SC4984-U	Si-npn	AF-Amp, 15V, 300mA, 1.3W, B=280..560, 200MHz	PCP	20tb	-	4a	San
CU	-	2SC5069	Si-npn	AF-Drv, 30V, 2A, 1.5W, B=800..3200, 250MHz	PCP	20tb	-	4a	San
CU	-	AP130-35Y	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CU	-	RT9161-50CX	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
CU-	-	RT9161-50PX	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
CV	-	AP130-36Y	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CW	-	AP130-37Y	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CWA	-	S-817B11AUA-CWAT2G	LVR-IC	1.1V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWB	-	S-817B12AUA-CWBT2G	LVR-IC	1.2V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWC	-	S-817B13AUA-CWCT2G	LVR-IC	1.3V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWD	-	S-817B14AUA-CWDT2G	LVR-IC	1.4V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWE	-	S-817B15AUA-CWET2G	LVR-IC	1.5V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWF	-	S-817B16AUA-CWFT2G	LVR-IC	1.6V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWG	-	S-817B17AUA-CWGT2G	LVR-IC	1.7V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWH	-	S-817B18AUA-CWHT2G	LVR-IC	1.8V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWI	-	S-817B19AUA-CWIT2G	LVR-IC	1.9V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWJ	-	S-817B20AUA-CWJT2G	LVR-IC	2.0V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWK	-	S-817B21AUA-CWKT2G	LVR-IC	2.1V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWL	-	S-817B22AUA-CWLT2G	LVR-IC	2.2V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWM	-	S-817B23AUA-CWMT2G	LVR-IC	2.3V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWN	-	S-817B24AUA-CWNT2G	LVR-IC	2.4V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWO	-	S-817B25AUA-CWOT2G	LVR-IC	2.5V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWP	-	S-817B26AUA-CWPT2G	LVR-IC	2.6V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWQ	-	S-817B27AUA-CWQT2G	LVR-IC	2.7V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWR	-	S-817B28AUA-CWRT2G	LVR-IC	2.8V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWS	-	S-817B29AUA-CWST2G	LVR-IC	2.9V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWT	-	S-817B30AUA-CWTT2G	LVR-IC	3.0V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWU	-	S-817B31AUA-CWUT2G	LVR-IC	3.1V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWV	-	S-817B32AUA-CWVT2G	LVR-IC	3.2V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWW	-	S-817B33AUA-CWWT2G	LVR-IC	3.3V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWX	-	S-817B34AUA-CWXT2G	LVR-IC	3.4V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWY	-	S-817B35AUA-CWYT2G	LVR-IC	3.5V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CWZ	-	S-817B36AUA-CWZT2G	LVR-IC	3.6V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CX	-	AP130-38Y	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CX-	-	RT9261B-50PX	DC-DC-IC	VFM step-up, 5.0V±2%, 50mA	SOT-89	20bq	DC2	4b	Rct
CXA	-	S-817B37AUA-CXAT2G	LVR-IC	3.7V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CXB	-	S-817B38AUA-CXBT2G	LVR-IC	3.8V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CXC	-	S-817B39AUA-CXCT2G	LVR-IC	3.9V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CXD	-	S-817B40AUA-CXDT2G	LVR-IC	4.0V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CXE	-	S-817B41AUA-CXET2G	LVR-IC	4.1V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CXF	-	S-817B42AUA-CXFT2G	LVR-IC	4.2V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CXG	-	S-817B43AUA-CXGT2G	LVR-IC	4.3V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CXH	-	S-817B44AUA-CXHT2G	LVR-IC	4.4V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CXI	-	S-817B45AUA-CXIT2G	LVR-IC	4.5V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CXJ	-	S-817B46AUA-CXJT2G	LVR-IC	4.6V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CXK	-	S-817B47AUA-CXKT2G	LVR-IC	4.7V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CXL	-	S-817B48AUA-CXLT2G	LVR-IC	4.8V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CXM	-	S-817B49AUA-CXMT2G	LVR-IC	4.9V±2%, 50mA	SOT-89	20vl	VR1	4i	Sii
CXN	-	S-817B50AUA-CXNT2G	LVR-IC	5.0V±2%, 75mA	SOT-89	20vl	VR1	4i	Sii
CXO	-	S-817B51AUA-CXOT2G	LVR-IC	5.1V±2%, 75mA	SOT-89	20vl	VR1	4i	Sii
CXP	-	S-817B52AUA-CXPT2G	LVR-IC	5.2V±2%, 75mA	SOT-89	20vl	VR1	4i	Sii
CXQ	-	S-817B53AUA-CXQT2G	LVR-IC	5.3V±2%, 75mA	SOT-89	20vl	VR1	4i	Sii
CXR	-	S-817B54AUA-CXRT2G	LVR-IC	5.4V±2%, 75mA	SOT-89	20vl	VR1	4i	Sii
CXS	-	S-817B55AUA-CXST2G	LVR-IC	5.5V±2%, 75mA	SOT-89	20vl	VR1	4i	Sii
CXT	-	S-817B56AUA-CXTT2G	LVR-IC	5.6V±2%, 75mA	SOT-89	20vl	VR1	4i	Sii
CXU	-	S-817B57AUA-CXUT2G	LVR-IC	5.7V±2%, 75mA	SOT-89	20vl	VR1	4i	Sii
CXV	-	S-817B58AUA-CXVT2G	LVR-IC	5.8V±2%, 75mA	SOT-89	20vl	VR1	4i	Sii
CXW	-	S-817B59AUA-CXWT2G	LVR-IC	5.9V±2%, 75mA	SOT-89	20vl	VR1	4i	Sii
CXX	-	S-817B60AUA-CXXT2G	LVR-IC	6.0V±2%, 75mA	SOT-89	20vl	VR1	4i	Sii
CY	-	2SC2881-Y	Si-npn	HV, 120V, 80mA, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4b	Tos
CY	-	2SJ186	p-MOSFET	V-MOS, 200V, 500mA, <12Ω(250mA),12/32ns	SOT-89	20fi	-	4b	Ren
CY	-	AP130-39Y	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CY	-	KTC4373-Y	Si-npn	AF-Drv, 120V, 800mA, 1W, B=120..240, 120MHz	SOT-89	20tb	-	4a	Kec
CY	-	RT9161-19CX	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
CYD	-	2SC5229-D	Si-npn	VHF/UHF, LN, 20V, 70mA, 700mW, B=60..120, 6.5GHz	PCP	20tb	-	4g	San
CYE	-	2SC5229-E	Si-npn	VHF/UHF, LN, 20V, 70mA, 700mW, B=90..180, 6.5GHz	PCP	20tb	-	4g	San
CYF	-	2SC5229-F	Si-npn	VHF/UHF, LN, 20V, 70mA, 700mW, B=135..270, 6.5GHz	PCP	20tb	-	4g	San
CZ	-	AP130-40Y	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20ch	VR1	4b	Ana
CZD	-	2SC5347-D	Si-npn	UHF-Amp, 20V, 150mA, 1.3W, B=60..120, 4.7GHz	SOT-89	20tb	-	4a	San
CZE	-	2SC5347-E	Si-npn	UHF-Amp, 20V, 150mA, 1.3W, B=90..180, 4.7GHz	SOT-89	20tb	-	4a	San
CZF	-	2SC5347-F	Si-npn	UHF-Amp, 20V, 150mA, 1.3W, B=130..270, 4.7GHz	SOT-89	20tb	-	4a	San
D0	-	ELM9730NAB	Vdet-IC	3.0V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
D0	-	ELM9850AB	LVR-IC	5.0V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
D0	-	KIC3201S-40	LVR-IC	LDO, 4.0V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
D0	-	TC54VC3002MB	Vdet-IC	3.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
D03	-	XC61CC3002P	Vdet-IC	3.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
D03	-	XE61CC3045PR	Vdet-IC	3.0V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
D05	-	LN61FC3012P	Vdet-IC	3.0V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
D05	-	XC61FC3012P	Vdet-IC	3.0V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
D06	-	LN61FC3042P	Vdet-IC	3.0V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
D06	-	XC61FC3042P	Vdet-IC	3.0V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
D07	-	LN61FC3052P	Vdet-IC	3.0V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
D07	-	XC61FC3052P	Vdet-IC	3.0V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
D1	-	ELM9731NAB	Vdet-IC	3.1V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
D1	-	ELM9851AB	LVR-IC	5.1V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
D1	-	KIC3201S-41	LVR-IC	LDO, 4.1V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
D1	-	TC54VC3102MB	Vdet-IC	3.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
D11A	-	ML6102C113P	Vdet-IC	1.1V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D12A	-	ML6102C123P	Vdet-IC	1.2V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D13	-	XC61CC3102P	Vdet-IC	3.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
D13	-	XE61CC3145PR	Vdet-IC	3.1V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
D13A	-	ML6102C133P	Vdet-IC	1.3V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D14A	-	ML6102C143P	Vdet-IC	1.4V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D15	-	LN61FC3112P	Vdet-IC	3.1V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
D15	-	XC61FC3112P	Vdet-IC	3.1V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
D15A	-	ML6102C153P	Vdet-IC	1.5V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D16	-	LN61FC3142P	Vdet-IC	3.1V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
D16	-	XC61FC3142P	Vdet-IC	3.1V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
D16A	-	ML6102C163P	Vdet-IC	1.6V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D17	-	LN61FC3152P	Vdet-IC	3.1V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
D17	-	XC61FC3152P	Vdet-IC	3.1V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
D17A	-	ML6102C173P	Vdet-IC	1.7V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D18A	-	ML6102C183P	Vdet-IC	1.8V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D19A	-	ML6102C193P	Vdet-IC	1.9V±3%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D2	-	ELM9732NAB	Vdet-IC	3.2V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
D2	-	ELM9852AB	LVR-IC	5.2V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
D2	-	KIC3201S-42	LVR-IC	LDO, 4.2V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
D2	-	TC54VC3202MB	Vdet-IC	3.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
D20A	-	ML6102C202P	Vdet-IC	2.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D21A	-	ML6102C212P	Vdet-IC	2.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D22A	-	ML6102C222P	Vdet-IC	2.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D23	-	XC61CC3202P	Vdet-IC	3.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
D23	-	XE61CC3245PR	Vdet-IC	3.2V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
D23A	-	ML6102C232P	Vdet-IC	2.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D24A	-	ML6102C242P	Vdet-IC	2.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D25	-	LN61FC3212P	Vdet-IC	3.2V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
D25	-	XC61FC3212P	Vdet-IC	3.2V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
D25A	-	ML6102C252P	Vdet-IC	2.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D26	-	LN61FC3242P	Vdet-IC	3.2V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
D26	-	XC61FC3242P	Vdet-IC	3.2V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
D26A	-	ML6102C262P	Vdet-IC	2.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D27	-	LN61FC3252P	Vdet-IC	3.2V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
D27	-	XC61FC3252P	Vdet-IC	3.2V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
D27A	-	ML6102C272P	Vdet-IC	2.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D28A	-	ML6102C282P	Vdet-IC	2.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D29A	-	ML6102C292P	Vdet-IC	2.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D2A	-	S-80844KLUA-D2A-T2	Vdet-IC	4.45V±2%, -Reset PPO	SOT-89	20vda	VD7	4b	Sii
D2B	-	S-80824KNUA-D2B-T2	Vdet-IC	2.45V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
D2C	-	S-80846KNUA-D2C-T2	Vdet-IC	4.65V±2%, -Reset ODO	SOT-89	20vda	VD6	4b	Sii
D3	-	ELM9733NAB	Vdet-IC	3.3V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
D3	-	ELM9853AB	LVR-IC	5.3V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
D3	-	KIC3201S-43	LVR-IC	LDO, 4.3V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
D3	-	TC54VC3302MB	Vdet-IC	3.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
D30A	-	ML6102C302P	Vdet-IC	3.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D31A	-	ML6102C312P	Vdet-IC	3.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D32A	-	ML6102C322P	Vdet-IC	3.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D33	-	XC61CC3302P	Vdet-IC	3.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
D33	-	XE61CC3345PR	Vdet-IC	3.3V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
D33A	-	ML6102C332P	Vdet-IC	3.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D34A	-	ML6102C342P	Vdet-IC	3.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D35	-	LN61FC3312P	Vdet-IC	3.3V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
D35	-	XC61FC3312P	Vdet-IC	3.3V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
D35A	-	ML6102C352P	Vdet-IC	3.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D36	-	LN61FC3342P	Vdet-IC	3.3V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
D36	-	XC61FC3342P	Vdet-IC	3.3V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
D36A	-	ML6102C362P	Vdet-IC	3.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D37	-	LN61FC3352P	Vdet-IC	3.3V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
D37	-	XC61FC3352P	Vdet-IC	3.3V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
D37A	-	ML6102C372P	Vdet-IC	3.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D38A	-	ML6102C382P	Vdet-IC	3.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D39A	-	ML6102C392P	Vdet-IC	3.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D4	-	ELM9734NAB	Vdet-IC	3.4V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
D4	-	ELM9854AB	LVR-IC	5.4V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
D4	-	KIC3201S-44	LVR-IC	LDO, 4.4V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
D4	-	TC54VC3402MB	Vdet-IC	3.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
D40A	-	ML6102C402P	Vdet-IC	4.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D41A	-	ML6102C412P	Vdet-IC	4.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D42A	-	ML6102C422P	Vdet-IC	4.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D43	-	XC61CC3402P	Vdet-IC	3.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
D43	-	XE61CC3445PR	Vdet-IC	3.4V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
D43A	-	ML6102C432P	Vdet-IC	4.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D44A	-	ML6102C442P	Vdet-IC	4.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D45	-	LN61FC3412P	Vdet-IC	3.4V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
D45	-	XC61FC3412P	Vdet-IC	3.4V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
D45A	-	ML6102C452P	Vdet-IC	4.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D46	-	LN61FC3442P	Vdet-IC	3.4V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
D46	-	XC61FC3442P	Vdet-IC	3.4V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
D46A	-	ML6102C462P	Vdet-IC	4.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D47	-	LN61FC3452P	Vdet-IC	3.4V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
D47	-	XC61FC3452P	Vdet-IC	3.4V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
D47A	-	ML6102C472P	Vdet-IC	4.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D48A	-	ML6102C482P	Vdet-IC	4.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D49A	-	ML6102C492P	Vdet-IC	4.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D5	-	ELM9735NAB	Vdet-IC	3.5V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
D5	-	ELM9855AB	LVR-IC	5.5V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
D5	-	KIC3201S-45	LVR-IC	LDO, 4.5V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
D5	-	TC54VC3502MB	Vdet-IC	3.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
D50A	-	ML6102C502P	Vdet-IC	5.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D51A	-	ML6102C512P	Vdet-IC	5.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D52A	-	ML6102C522P	Vdet-IC	5.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D53	-	XC61CC3502P	Vdet-IC	3.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
D53	-	XE61CC3545PR	Vdet-IC	3.5V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
D53A	-	ML6102C532P	Vdet-IC	5.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D54A	-	ML6102C542P	Vdet-IC	5.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D55	-	LN61FC3512P	Vdet-IC	3.5V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
D55	-	XC61FC3512P	Vdet-IC	3.5V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
D55A	-	ML6102C552P	Vdet-IC	5.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D56	-	LN61FC3542P	Vdet-IC	3.5V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
D56	-	XC61FC3542P	Vdet-IC	3.5V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
D56A	-	ML6102C562P	Vdet-IC	5.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D57	-	LN61FC3552P	Vdet-IC	3.5V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
D57	-	XC61FC3552P	Vdet-IC	3.5V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
D57A	-	ML6102C572P	Vdet-IC	5.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D58A	-	ML6102C582P	Vdet-IC	5.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D59A	-	ML6102C592P	Vdet-IC	5.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D6	-	ELM9736NAB	Vdet-IC	3.6V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
D6	-	ELM9856AB	LVR-IC	5.6V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
D6	-	KIC3201S-46	LVR-IC	LDO, 4.6V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
D6	-	TC54VC3602MB	Vdet-IC	3.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
D6	-	TFM7660	Si-npn-Darl	HV, 150V, 600mW, 4A, B>1000	SOT-89	20tb	-	4g	Tfr
D60A	-	ML6102C602P	Vdet-IC	6.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4g	Mlc
D63	-	XC61CC3602P	Vdet-IC	3.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
D63	-	XE61CC3645PR	Vdet-IC	3.6V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
D65	-	LN61FC3612P	Vdet-IC	3.6V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
D65	-	XC61FC3612P	Vdet-IC	3.6V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
D66	-	LN61FC3642P	Vdet-IC	3.6V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
D66	-	XC61FC3642P	Vdet-IC	3.6V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
D67	-	LN61FC3652P	Vdet-IC	3.6V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
D67	-	XC61FC3652P	Vdet-IC	3.6V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
D7	-	ELM9737NAB	Vdet-IC	3.7V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
D7	-	ELM9857AB	LVR-IC	5.7V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
D7	-	KIC3201S-47	LVR-IC	LDO, 4.7V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
D7	-	TC54VC3702MB	Vdet-IC	3.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
D73	-	XC61CC3702P	Vdet-IC	3.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
D73	-	XE61CC3745PR	Vdet-IC	3.7V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
D75	-	LN61FC3712P	Vdet-IC	3.7V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
D75	-	XC61FC3712P	Vdet-IC	3.7V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
D76	-	LN61FC3742P	Vdet-IC	3.7V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
D76	-	XC61FC3742P	Vdet-IC	3.7V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
D77	-	LN61FC3752P	Vdet-IC	3.7V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
D77	-	XC61FC3752P	Vdet-IC	3.7V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
D8	-	ELM9738NAB	Vdet-IC	3.8V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
D8	-	ELM9858AB	LVR-IC	5.8V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
D8	-	KIC3201S-48	LVR-IC	LDO, 4.8V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
D8	-	TC54VC3802MB	Vdet-IC	3.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
D83	-	XC61CC3802P	Vdet-IC	3.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
D83	-	XE61CC3845PR	Vdet-IC	3.8V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
D85	-	LN61FC3812P	Vdet-IC	3.8V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
D85	-	XC61FC3812P	Vdet-IC	3.8V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
D86	-	LN61FC3842P	Vdet-IC	3.8V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
D86	-	XC61FC3842P	Vdet-IC	3.8V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
D87	-	LN61FC3852P	Vdet-IC	3.8V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
D87	-	XC61FC3852P	Vdet-IC	3.8V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
D882GR	-	WTM882-GR	Si-npn	GP, 40V, 3A, 500mW, B=200..400, 80MHz	SOT-89	20tb	-	4b	Wtr
D882O	-	WTM882-O	Si-npn	GP, 40V, 3A, 500mW, B=100..200, 80MHz	SOT-89	20tb	-	4b	Wtr
D882R	-	WTM882-R	Si-npn	GP, 40V, 3A, 500mW, B=60..120, 80MHz	SOT-89	20tb	-	4b	Wtr
D882Y	-	WTM882-Y	Si-npn	GP, 40V, 3A, 500mW, B=160..320, 80MHz	SOT-89	20tb	-	4b	Wtr
D9	-	ELM9739NAB	Vdet-IC	3.9V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
D9	-	ELM9859AB	LVR-IC	5.9V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
D9	-	KIC3201S-49	LVR-IC	LDO, 4.9V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
D9	-	TC54VC3902MB	Vdet-IC	3.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
D93	-	XC61CC3902P	Vdet-IC	3.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
D93	-	XE61CC3945PR	Vdet-IC	3.9V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D95	-	LN61FC3912P	Vdet-IC	3.9V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
D95	-	XC61FC3912P	Vdet-IC	3.9V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
D96	-	LN61FC3942P	Vdet-IC	3.9V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
D96	-	XC61FC3942P	Vdet-IC	3.9V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
D97	-	LN61FC3952P	Vdet-IC	3.9V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
D97	-	XC61FC3952P	Vdet-IC	3.9V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
DA	-	2SD1418-A	Si-npn	AF, 120V, 1A, 1W, B=60..120, >100MHz	SOT-89	20tb	-	4b	Ren
DA	-	BF622	Si-npn	Vid, 250V, 50mA, 1.25W, B>50, >60MHz	SOT-89	20tb	-	4b	Phi
DA	-	ELM99501B	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
DA	-	XC62RP3002P	LVR-IC	LDO, 3.0V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
DAP	-	2SD1664-P	Si-npn	AF-Drv, 40V, 1A, 500mW, B=82..180, >150MHz	SOT-89	20tb	-	4b	Rhm
DAP	-	2SD1664PT-R	Si-npn	AF, Sw, 32V, 1A, B=82..180, 150MHz	SOT-89	20tb	-	4b	Chm
DAQ	-	2SD1664-Q	Si-npn	AF-Drv, 40V, 1A, 500mW, B=120..270, >150MHz	SOT-89	20tb	-	4b	Rhm
DAR	-	2SD1664-R	Si-npn	AF-Drv, 40V, 1A, 500mW, B=180..390, >150MHz	SOT-89	20tb	-	4b	Rhm
DAS	-	2SD1618-S	Si-npn	Lo-sat, 20V, 700mA, 500mW, B=140..280, 250MHz	PCP	20tb	-	4a	San
DAT	-	2SD1618-T	Si-npn	Lo-sat, 20V, 700mA, 500mW, B=200..400, 250MHz	PCP	20tb	-	4a	San
DAU	-	2SD1618-U	Si-npn	Lo-sat, 20V, 700mA, 500mW, B=280..560, 250MHz	PCP	20tb	-	4a	San
DB	-	2SD1418-B	Si-npn	AF, 120V, 1A, 1W, B=100..200, >100MHz	SOT-89	20tb	-	4b	Ren
DB	-	BF623	Si-pnp	Vid, 250V, 50mA, 1.25W, B>50, >60MHz	SOT-89	20tb	-	4b	Phi
DB	-	ELM99511B	LVR-IC	LDO, 5.1V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
DB	-	XC62RP3102P	LVR-IC	LDO, 3.1V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
DBP	-	2SD1766B-P	Si-npn	AF-Drv, 40V, 2A, 500mW, B=82..180, >100MHz	SOT-89	20tb	-	4b	Rhm
DBQ	-	2SD1766B-Q	Si-npn	AF-Drv, 40V, 2A, 500mW, B=120..270, >100MHz	SOT-89	20tb	-	4b	Rhm
DBR	-	2SD1619-R	Si-npn	AF-Amp, 25V, 1A, 500mW, B=100..200, 180MHz	PCP	20tb	-	4a	San
DBR	-	2SD1766B-R	Si-npn	AF-Drv, 40V, 2A, 500mW, B=180..390, >100MHz	SOT-89	20tb	-	4b	Rhm
DBS	-	2SD1619-S	Si-npn	AF-Amp, 25V, 1A, 500mW, B=140..280, 180MHz	PCP	20tb	-	4a	San
DBT	-	2SD1619-T	Si-npn	AF-Amp, 25V, 1A, 500mW, B=200..400, 180MHz	PCP	20tb	-	4a	San
DBU	-	2SD1619-U	Si-npn	AF-Amp, 25V, 1A, 500mW, B=280..560, 180MHz	PCP	20tb	-	4a	San
DC	-	2SC3444-C	Si-npn	Relay-Drv, 60V, 1A, 500mW, B=55..110, 80MHz	SOT-89	20tb	-	4a	Mit
DC	-	2SD1418-C	Si-npn	AF, 120V, 1A, 1W, B=160..320, >100MHz	SOT-89	20tb	-	4b	Ren
DC	-	2SD1620	Si-npn	Strobe, 30V, 3A, 500mW, B=1400..210, 200MHz	PCP	20tb	-	4a	San
DC	-	BF620	Si-npn	Vid, 300V, 50mA, 1.25W, B>50, >60MHz	SOT-89	20tb	-	4b	Phi
DC	-	BFN20	Si-npn	Vid, 300V, 20..50mA, >60MHz	SOT-89	20tb	-	4b	Sie
DC	-	ELM99521B	LVR-IC	LDO, 5.2V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
DC	-	XC62RP3202P	LVR-IC	LDO, 3.2V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
DC-	-	RT9261-27PX	DC-DC-IC	VFM step-up, 2.7V±2%, 50mA	SOT-89	20br	DC5	4b	Rct
DCP	-	2SD1767-P	Si-npn	GP, AF, 80V, 700mA, 500mW, B=82..180, >120MHz	SOT-89	20tb	-	4b	Rhm
DCQ	-	2SD1767-Q	Si-npn	GP, AF, 80V, 700mA, 500mW, B=120..270, >120MHz	SOT-89	20tb	-	4b	Rhm
DCR	-	2SD1767-R	Si-npn	GP, AF, 80V, 700mA, 500mW, B=180..390, >120MHz	SOT-89	20tb	-	4b	Rhm
DD	-	2SC3444-D	Si-npn	Relay-Drv, 60V, 1A, 500mW, B=90..180, 80MHz	SOT-89	20tb	-	4a	Mit
DD	-	2SD1419-D	Si-npn	AF, 120V, 1A, 1W, B=60..120, >100MHz	SOT-89	20tb	-	4b	Ren
DD	-	BFN16	Si-npn	Vid, 250V, 0.2A, >60MHz	SOT-89	20tb	-	4b	Sie
DD	-	ELM99531B	LVR-IC	LDO, 5.3V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
DD	-	XC62RP3302P	LVR-IC	LDO, 3.3V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
DDP	-	2SD1766D-P	Si-npn	AF-Drv, 40V, 2A, 500mW, B=82..180, >100MHz	SOT-89	20tb	-	4b	Rhm
DDQ	-	2SD1766D-Q	Si-npn	AF-Drv, 40V, 2A, 500mW, B=120..270, >100MHz	SOT-89	20tb	-	4b	Rhm
DDR	-	2SD1621-R	Si-npn	Drv, 30V, 2A, 500mW, B=100..200, 150MHz	PCP	20tb	-	4a	San
DDR	-	2SD1766D-R	Si-npn	AF-Drv, 40V, 2A, 500mW, B=180..390, >100MHz	SOT-89	20tb	-	4b	Rhm
DDS	-	2SD1621-S	Si-npn	Drv, 30V, 2A, 500mW, B=140..280, 150MHz	PCP	20tb	-	4a	San
DDT	-	2SD1621-T	Si-npn	Drv, 30V, 2A, 500mW, B=200..400, 150MHz	PCP	20tb	-	4a	San
DDU	-	2SD1621-U	Si-npn	Drv, 30V, 2A, 500mW, B=280..560, 150MHz	PCP	20tb	-	4a	San
DE	-	2SC3444-E	Si-npn	Relay-Drv, 60V, 1A, 500mW, B=150..300, 80MHz	SOT-89	20tb	-	4a	Mit
DE	-	2SD1419-E	Si-npn	AF, 120V, 1A, 1W, B=100..200, >100MHz	SOT-89	20tb	-	4b	Ren
DE	-	2SD1834	Si-npn-Darl	AF-Drv, 60V, 1A, 500mW, B>2000	SOT-89	20tb	-	4b	Rhm
DE	-	BFN18	Si-npn	Vid, 300V, 200mA, 1W, B>30, >70MHz	SOT-89	20tb	-	4b	Sie
DE	-	ELM99541B	LVR-IC	LDO, 5.4V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
DE	-	XC62RP3402P	LVR-IC	LDO, 3.4V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
DER	-	2SD1622-R	Si-npn	AF-Amp, 60V, 1A, 500mW, B=100..200, 150MHz	PCP	20tb	-	4a	San
DES	-	2SD1622-S	Si-npn	AF-Amp, 60V, 1A, 500mW, B=140..280, 150MHz	PCP	20tb	-	4a	San
DET	-	2SD1622-T	Si-npn	AF-Amp, 60V, 1A, 500mW, B=200..400, 150MHz	PCP	20tb	-	4a	San
DEU	-	2SD1622-U	Si-npn	AF-Amp, 60V, 1A, 500mW, B=280..560, 150MHz	PCP	20tb	-	4a	San
DF	-	BF621	Si-pnp	Vid, 300V, 50mA, 1.25W, B>50, >60MHz	SOT-89	20tb	-	4b	Phi
DF	-	BFN21	Si-pnp	Vid, 300V, 20..50mA, >60MHz	SOT-89	20tb	-	4b	Sie
DF	-	ELM99551B	LVR-IC	LDO, 5.5V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
DF	-	TFM5213	Si-npn	AF, GP, 80V, 1A 600mW, B=82..820, 100MHz	SOT-89	20tb	-	4g	Tfr
DF	-	XC62RP3502P	LVR-IC	LDO, 3.5V±2%, 6mA, 500mW	SOT-89	20vl	VR1	4c	Tor
DF-	-	RT9261-30PX	DC-DC-IC	VFM step-up, 3.0V±2%, 50mA	SOT-89	20br	DC5	4b	Rct
DF_	-	2SD1898	Si-npn	AF-Drv, 80V, 1A, 2W, B=82..390, >100MHz	SOT-89	20tb	-	4b	Rhm
DFP	-	2SD1898-P	Si-npn	GP, 100V, 1A, 500mW, 100MHz, B=82..180	SOT-89	20tb	-	4b	Rhm
DFP	-	TFM5213P	Si-npn	AF, GP, 80V, 1A 600mW, B=82..180, 100MHz	SOT-89	20tb	-	4g	Tfr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DFQ	-	2SD1898-Q	Si-npn	GP, 100V, 1A, 500mW, 100MHz, B=120..270	SOT-89	20tb	-	4b	Rhm
DFQ	-	TFM5213Q	Si-npn	AF, GP, 80V, 1A 600mW, B=120..270, 100MHz	SOT-89	20tb	-	4g	Tfr
DFR	-	2SD1623-R	Si-npn	Drv, 60V, 2A, 200mW, B=100..200, 150MHz	PCP	20tb	-	4a	San
DFR	-	2SD1898-R	Si-npn	GP, 100V, 1A, 500mW, 100MHz, B=180..390	SOT-89	20tb	-	4b	Rhm
DFR	-	TFM5213R	Si-npn	AF, GP, 80V, 1A 600mW, B=180..390, 100MHz	SOT-89	20tb	-	4g	Tfr
DFS	-	2SD1623-S	Si-npn	Drv, 60V, 2A, 200mW, B=140..280, 150MHz	PCP	20tb	-	4a	San
DFS	-	TFM5213S	Si-npn	AF, GP, 80V, 1A 600mW, B=270..560, 100MHz	SOT-89	20tb	-	4g	Tfr
DFT	-	2SD1623-T	Si-npn	Drv, 60V, 2A, 200mW, B=200..400, 150MHz	PCP	20tb	-	4a	San
DFT	-	TFM5213T	Si-npn	AF, GP, 80V, 1A 600mW, B=390..820, 100MHz	SOT-89	20tb	-	4g	Tfr
DFU	-	2SD1623-U	Si-npn	Drv, 60V, 2A, 200mW, B=280..560, 150MHz	PCP	20tb	-	4a	San
DG	-	BFN17	Si-pnp	Vid, 250V, 200mA, 1W, B>40, >100MHz	SOT-89	20tb	-	4b	Sie
DG	-	ELM99561B	LVR-IC	LDO, 5.6V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
DG	-	RXT-A14	Si-npn-Darl	AF, Drv, 40V, 500mA, 1W, B=20000	SOT-89	20tb	-	4b	Rhm
DGQ	-	2SD1963-Q	Si-npn	AF-Drv, 50V, 3A, 500mW, B=120..270, >150MHz	SOT-89	20tb	-	4b	Rhm
DGR	-	2SD1624-R	Si-npn	Drv, 60V, 3A, 500mW, B=100..200, 150MHz	PCP	20tb	-	4a	San
DGR	-	2SD1963-R	Si-npn	AF-Drv, 50V, 3A, 500mW, B=180..390, >150MHz	SOT-89	20tb	-	4b	Rhm
DGS	-	2SD1624-S	Si-npn	Drv, 60V, 3A, 500mW, B=140..280, 150MHz	PCP	20tb	-	4a	San
DGS	-	2SD1963-S	Si-npn	AF-Drv, 50V, 3A, 500mW, B=270..560, >150MHz	SOT-89	20tb	-	4b	Rhm
DGT	-	2SD1624-T	Si-npn	Drv, 60V, 3A, 500mW, B=280..560, 150MHz	PCP	20tb	-	4a	San
DGU	-	2SD1624-U	Si-npn	Drv, 60V, 3A, 500mW, B=280..560, 150MHz	PCP	20tb	-	4a	San
DH	-	2SB1025-H	Si-pnp	AF, 120V, 1A, 1W, B=60..120, >100MHz	SOT-89	20tb	-	4b	Ren
DH	-	2SD1625	Si-npn-Darl	Drv, 80V, 700mA, 500mW, B>5000, 200MHz	PCP	20tb	-	4a	San
DH	-	BFN19	Si-pnp	Vid, 300V, 200mA, 1W, B>30, >100MHz	SOT-89	20tb	-	4b	Sie
DH	-	ELM99571B	LVR-IC	LDO, 5.7V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
DH	-	RXT-A28	Si-npn-Darl	AF, Drv, 80V, 500mA, 1W, B>10000, 100MHz	SOT-89	20tb	-	4b	Rhm
DI	-	2SD1626	Si-npn-Darl	Drv, 80V, 1.5A, 500mW, B>4000, 120MHz	PCP	20tb	-	4a	San
DJ	-	2SB1025-J	Si-pnp	AF, 120V, 1A, 1W, B=100..200, >100MHz	SOT-89	20tb	-	4b	Ren
DJ	-	2SD1627	Si-npn-Darl	Drv, 30V, 2A, 500mW, B>4000, 120MHz	PCP	20tb	-	4a	San
DJ	-	ELM99581B	LVR-IC	LDO, 5.8V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
DJ-	-	RT9261-33PX	DC-DC-IC	VFM step-up, 3.3V±2%, 50mA	SOT-89	20br	DC5	4b	Rct
DK	-	2SB1025-K	Si-pnp	AF, 120V, 1A, 1W, B=160..320, >100MHz	SOT-89	20tb	-	4b	Ren
DK	-	2SB798-K	Si-pnp	AF-Amp, 30V, 1A, 2W, 110MHz, B=90..180	SOT-89	20tb	-	4b	Nec
DK	-	ELM99591B	LVR-IC	LDO, 5.9V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
DK	-	TFM4672	Si-npn	AF, GP, 50V, 600mW, 3A B=180..500, 210MHz	SOT-89	20tb	-	4g	Tfr
DKE	-	2SD1628-E	Si-npn	Sw, 60V, 5A, 500mA, B=120..200, 120MHz, 30/340ns	PCP	20tb	-	4a	San
DKF	-	2SD1628-F	Si-npn	Sw, 60V, 5A, 500mA, B=160..320, 120MHz, 30/340ns	PCP	20tb	-	4a	San
DKG	-	2SD1628-G	Si-npn	Sw, 60V, 5A, 500mA, B=280..560, 120MHz, 30/340ns	PCP	20tb	-	4a	San
DKP	-	2SC4672-P	Si-npn	AF-Drv, 60V, 2A, 500mW, B=82..180, >210MHz	SOT-89	20tb	-	4b	Rhm
DKQ	-	2SC4672-Q	Si-npn	AF-Drv, 60V, 2A, 500mW, B=120..270, >210MHz	SOT-89	20tb	-	4b	Rhm
DL	-	2SB1026-L	Si-pnp	AF, 120V, 1A, 1W, B=60..120, >100MHz	SOT-89	20tb	-	4b	Ren
DL	-	2SB798-L	Si-pnp	AF-Amp, 30V, 1A, 2W, 110MHz, B=135..270	SOT-89	20tb	-	4b	Nec
DL	-	2SD2099	Si-npn-Digi+Di	Motor-Driver, 40V, 3A, 1.5W, B>70, 100kHz, R1=90Ω, R2=800Ω	PCP	20tb	-	4a	San
DLN	-	2SD2167-N	Si-npn	Relay-Drv, 31V, 2A, 500mW, B=56..120, >100MHz, Z-Di (C->B)	SOT-89	20tb	-	4b	Rhm
DLP	-	2SD2167-P	Si-npn	Relay-Drv, 31V, 2A, 500mW, B=82..180, >100MHz, Z-Di (C->B)	SOT-89	20tb	-	4b	Rhm
DLQ	-	2SD2167-Q	Si-npn	Relay-Drv, 31V, 2A, 500mW, B=120..270, >100MHz, Z-Di (C->B)	SOT-89	20tb	-	4b	Rhm
DM	-	2SB1026-M	Si-pnp	AF, 120V, 1A, 1W, B=100..200, >100MHz	SOT-89	20tb	-	4b	Ren
DM	-	2SB798-M	Si-pnp	AF-Amp, 30V, 1A, 2W, 110MHz, B=200..400	SOT-89	20tb	-	4b	Nec
DM	-	2SD1998	Si-npn-Digi+Di	Motor-Driver, 40V, 3A, 1.5W, B>70, 100MHz, R2=800Ω	PCP	20tb	-	4a	San
DM	-	2SD2170	Si-npn-Darl	AF, 90V, 2A, 500mW, B=1000..10000, >80MHz	SOT-89	20tb	-	4b	Rhm
DN	-	2SD1999	Si-npn-Digi+Di	Motor-Driver, 25V, 4A, 1.5W, B>70, 200MHz, R2=1.5kΩ	PCP	20tb	-	4a	San
DNU	-	2SD2153-U	Si-npn	Hi-beta, 30, 2A, 500mW, 110MHz, B=560..1200	MPT3	20tb	-	4b	Rhm
DNV	-	2SD2153-V	Si-npn	Hi-beta, 30, 2A, 500mW, 110MHz, B=820..1800	MPT3	20tb	-	4b	Rhm
DNW	-	2SD2153-W	Si-npn	Hi-beta, 30, 2A, 500mW, 110MHz, B=1200..2700	MPT3	20tb	-	4b	Rhm
DO	-	2SA1201-O	Si-pnp	HV, 120V, 80mA, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4b	Tos
DO	-	2SD1997	Si-npn-Digi+Di	Motor-Driver, 40V, 3A, 1.5W, B>70, 100MHz, R1=160Ω, R2=0.8k	PCP	20tb	-	4a	San
DO	-	KTA1661-O	Si-pnp	Drv, 120V, 800mA, 1W, B=80..160, 120MHz	SOT-89	20tb	-	4a	Kec
DP	-	2SB789-P	Si-pnp	AF-Drv, 100V, 1A, 1W, B=60..120, 120MHz	SOT-89	20tb	-	4b	Pan
DP	-	2SD2100	Si-npn-Digi+Di	Motor-Driver, 25V, 2A, 1.3W, B>70, 200MHz, R2=1.6kΩ	PCP	20tb	-	4a	San
DP	-	2SD2195	Si-npn-Darl+Di	GP, 100V, 2A, 2W, B=1000..10000, 80MHz	SOT-89	20tb	-	4b	Rhm
DP	-	HQ1L2N	Si-pnp-Digi	Sw, 20V, 2A, 2W, R1/R2=0k47/4k7	SOT-89	20tb	-	4b	Nec
DPE	-	XC6214P152PR	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DPF	-	XC6214P162PR	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DPH	-	XC6214P172PR	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DPK	-	XC6214P182PR	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DPL	-	XC6214P192PR	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DPM	-	XC6214P202PR	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DPN	-	XC6214P212PR	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DPP	-	XC6214P222PR	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DPR	-	XC6214P232PR	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DPS	-	XC6214P242PR	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DPT	-	XC6214P252PR	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DPU	-	XC6214P262PR	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DPV	-	XC6214P272PR	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DPX	-	XC6214P282PR	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DPY	-	XC6214P292PR	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DPZ	-	XC6214P302PR	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DQ	-	2SB789-Q	Si-pnp	AF-Drv, 100V, 1A, 1W, B=90.155, 120MHz	SOT-89	20tb	-	4b	Pan
DQ	-	2SD2176	Si-npn-Darl+Di	Motor-Driver, 50V, 1.2A, 1.3W, B=1000..2000, Z-Di(B > C)	PCP	20tb	-	4a	San
DQ	-	HQ1A3M	Si-pnp-Digi	Sw, 20V, 2A, 2W, R1/R2=1k/1k	SOT-89	20tb	-	4b	Nec
DQ	-	TFM1857A	Si-npn	HV, 160V, 1.5A, 600mW, B=82..320, 140MHz	SOT-89	20tb	-	4g	Tfr
DQN	-	2SD2211-N	Si-npn	AF, Sw, 160V, 1.5A, 500mW, B=56..120, >80MHz	SOT-89	20tb	-	4b	Rhm
DQP	-	2SD2211-P	Si-npn	AF, Sw, 160V, 1.5A, 500mW, B=82..180, >80MHz	SOT-89	20tb	-	4b	Rhm
DQQ	-	2SD2211-Q	Si-npn	AF, Sw, 160V, 1.5A, 500mW, B=120..270, >80MHz	SOT-89	20tb	-	4b	Rhm
DR	-	2SB789-R	Si-pnp	AF-Drv, 100V, 1A, 1W, B=130..220, 120MHz	SOT-89	20tb	-	4b	Pan
DR	-	2SC4643	Si-npn	UHF, 15V, 50mA, 400mW, B=40..250, >5.5GHz	SOT-89	20tb	-	4b	Ren
DR	-	2SD2212	Si-npn-Darl+Di	AF, 60V, 2A, B=1k..10k, 80MHz, Z-Di(B ->C)	SOT-89	20tb	-	4b	Rhm
DR	-	2SD2261	Si-npn-Darl+Di	Motor-Driver, 80V, 2.5A, 1.5W, B=2000..30000	PCP	20tb	-	4a	San
DR	-	HQ1F3M	Si-pnp-Digi	Sw, 20V, 2A, 2W, R1/R2=0k22/2k2	SOT-89	20tb	-	4b	Nec
DR-	-	RT9261-40PX	DC-DC-IC	VFM step-up, 4.0V±2%, 50mA	SOT-89	20br	DC5	4b	Rct
DR0	-	XC6214P312PR	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DR1	-	XC6214P322PR	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DR2	-	XC6214P332PR	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DR3	-	XC6214P342PR	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DR4	-	XC6214P352PR	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DR5	-	XC6214P362PR	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DR6	-	XC6214P372PR	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DR7	-	XC6214P382PR	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DR8	-	XC6214P392PR	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DR9	-	XC6214P402PR	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DRA	-	XC6214P412PR	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DRB	-	XC6214P422PR	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DRC	-	XC6214P432PR	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DRD	-	XC6214P442PR	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DRE	-	XC6214P452PR	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DRF	-	XC6214P462PR	LVR-IC	LDO, 4.6V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DRH	-	XC6214P472PR	LVR-IC	LDO, 4.7V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DRK	-	XC6214P482PR	LVR-IC	LDO, 4.8V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DRL	-	XC6214P492PR	LVR-IC	LDO, 4.9V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DRN	-	XC6214P502PR	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-89	20vl	VR1	4e	Tor
DS	-	2SB789-S	Si-pnp	AF-Drv, 100V, 1A, 1W, B=170..340, 120MHz	SOT-89	20tb	-	4b	Pan
DS	-	2SD1946	Si-npn	Hi-beta, 15V, 1A, B=800	SOT-89	20tb	-	4b	Ren
DS	-	HQ1F3P	Si-pnp-Digi	Sw, 20V, 2A, 2W, R1/R2=2k2/10k	SOT-89	20tb	-	4b	Nec
DT	-	2SD1471-D	Si-npn-Darl+Di	GP, 40V, 300mA, 1W, B=2000..100K	SOT-89	20te	-	4b	Ren
DT	-	HQ1L2Q	Si-pnp-Digi	Sw, 20V, 2A, 2W, R1/R2=4k7/10k	SOT-89	20tb	-	4b	Nec
DTP	-	2SD2391-P	Si-npn	AF, 60V, 2A, 500mW, B=82..180, >210MHz	SOT-89	20tb	-	4b	Rhm
DTQ	-	2SD2391-Q	Si-npn	AF, 60V, 2A, 500mW, B=120..270, >210MHz	SOT-89	20tb	-	4b	Rhm
DU	-	HQ1F2Q	Si-pnp-Digi	Sw, 20V, 2A, 2W, R1/R2=10k/10k	SOT-89	20tb	-	4b	Nec
DVV	-	2SD2537-V	Si-npn	Hi-beta, 30V, 2A, 2W, 200MHz, B=820..1800	MPT3	20tb	-	4b	Rhm
DVW	-	2SD2537-W	Si-npn	Hi-beta, 30V, 2A, 2W, 200MHz, B=1200..2700	MPT3	20tb	-	4b	Rhm
DX	-	HQ1A4A	Si-pnp-Digi	Sw, 20V, 2A, 2W, R2=10k	SOT-89	20tb	-	4b	Nec
DY	-	2SA1201-Y	Si-pnp	HV, 120V, 80mA, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4b	Tos
DY	-	2SK1579	n-MOSFET	V-MOS, Rgate, 12V, ±2A, 500/1500ns	SOT-89	20fa	-	4b	Ren
DY	-	KTA1661-Y	Si-pnp	Drv, 120V, 800mA, 1W, B=120..240, 120MHz	SOT-89	20tb	-	4a	Kec
E0	-	ELM9740NAB	Vdet-IC	4.0V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
E0	-	ELM9860AB	LVR-IC	6.0V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
E0	-	KIC3201S-50	LVR-IC	LDO, 5.0V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
E0	-	TC54VC4002MB	Vdet-IC	4.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
E001G	-	ECG001B-G	MMIC	Buff/amp, DC..6GHz, 22dB (1GHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
E002G	-	ECG002B-G	MMIC	Buff/amp, DC..6GHz, 20dB (1GHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
E003G	-	ECG003B-G	MMIC	Buff/amp, DC..6GHz, 20dB (1GHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
E004G	-	ECG004B-G	MMIC	Buff/amp, DC..6GHz, 16.2dB (1GHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
E005G	-	ECG005B-G	MMIC	Buff/amp, DC..4GHz, 22.1dB (1GHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
E006G	-	ECG006B-G	MMIC	Buff/amp, DC..5.5GHz, 15dB (1GHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
E008G	-	ECG008B-G	MMIC	Buff/amp, DC..4GHz, 15dB (1GHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
E01	-	DTDG14GP	Si-npn-Digi	Sw, 60V, 1A, 500mW, B>300, 80MHz, R2=10k	SOT-89	20tb	-	4b	Rhm
E02	-	DTDG23YP	Si-npn-Digi	Sw, 50V, 1A, 1.5mW, 250MHz, R1/R2=4k7/4k7+Z-Di	MPT3	20tb	-	4b	Rhm
E03	-	XC61CC4002P	Vdet-IC	4.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
E03	-	XE61CC4045PR	Vdet-IC	4.0V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
E040G	-	ECG040B-G	MMIC	Buff/amp, DC..4GHz, 16dB (1GHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
E05	-	LN61FC4012P	Vdet-IC	4.0V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E05	-	XC61FC4012P	Vdet-IC	4.0V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
E055G	-	ECG055B-G	MMIC	Buff/amp, DC..6GHz, 20.5B (1GHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
E06	-	LN61FC4042P	Vdet-IC	4.0V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
E06	-	XC61FC4042P	Vdet-IC	4.0V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
E07	-	LN61FC4052P	Vdet-IC	4.0V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
E07	-	XC61FC4052P	Vdet-IC	4.0V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
E1	-	ELM9741NAB	Vdet-IC	4.1V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
E1	-	KIC3201S-51	LVR-IC	LDO, 5.1V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
E1	-	TC54VC4102MB	Vdet-IC	4.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
E11A	-	ML6102N113P	Vdet-IC	1.1V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E12A	-	ML6102N123P	Vdet-IC	1.2V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E13	-	XC61CC4102P	Vdet-IC	4.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
E13	-	XE61CC4145PR	Vdet-IC	4.1V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
E13A	-	ML6102N133P	Vdet-IC	1.3V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E14A	-	ML6102N143P	Vdet-IC	1.4V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E15	-	LN61FC4112P	Vdet-IC	4.1V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
E15	-	XC61FC4112P	Vdet-IC	4.1V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
E15A	-	ML6102N153P	Vdet-IC	1.5V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E16	-	LN61FC4142P	Vdet-IC	4.1V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
E16	-	XC61FC4142P	Vdet-IC	4.1V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
E16A	-	ML6102N163P	Vdet-IC	1.6V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E17	-	LN61FC4152P	Vdet-IC	4.1V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
E17	-	XC61FC4152P	Vdet-IC	4.1V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
E17A	-	ML6102N173P	Vdet-IC	1.7V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E18A	-	ML6102N183P	Vdet-IC	1.8V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E19A	-	ML6102N193P	Vdet-IC	1.9V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E1K8	-	MTE1K8N25KM3	n-MOSFET	Power, 250V, 1A, 2W, Rds=1.63 Ohm(2A), 12/13ns	SOT-89	20fi	-	4b	Cys
E2	-	ELM9742NAB	Vdet-IC	4.2V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
E2	-	KIC3201S-52	LVR-IC	LDO, 5.2V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
E2	-	TC54VC4202MB	Vdet-IC	4.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
E20	ji	XC6382A201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E20	jk	XC6385A201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E20A	-	ML6102N202P	Vdet-IC	2.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E21	ji	XC6382A211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E21	jk	XC6385A211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E21A	-	ML6102N212P	Vdet-IC	2.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E22	ji	XC6382A221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E22	jk	XC6385A221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E22A	-	ML6102N222P	Vdet-IC	2.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E23	-	XC61CC4202P	Vdet-IC	4.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
E23	-	XE61CC4245PR	Vdet-IC	4.2V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
E23	ji	XC6382A231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E23	jk	XC6385A231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E23A	-	ML6102N232P	Vdet-IC	2.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E24	ji	XC6382A241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E24	jk	XC6385A241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E24A	-	ML6102N242P	Vdet-IC	2.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E25	-	LN61FC4212P	Vdet-IC	4.2V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
E25	-	XC61FC4212P	Vdet-IC	4.2V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
E25	ji	XC6382A251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E25	jk	XC6385A251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E25A	-	ML6102N252P	Vdet-IC	2.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E26	-	LN61FC4242P	Vdet-IC	4.2V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
E26	-	XC61FC4242P	Vdet-IC	4.2V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
E26	ji	XC6382A261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E26	jk	XC6385A261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E26A	-	ML6102N262P	Vdet-IC	2.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E27	-	LN61FC4252P	Vdet-IC	4.2V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
E27	-	XC61FC4252P	Vdet-IC	4.2V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
E27	ji	XC6382A271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E27	jk	XC6385A271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E27A	-	ML6102N272P	Vdet-IC	2.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E28	ji	XC6382A281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E28	jk	XC6385A281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E28A	-	ML6102N282P	Vdet-IC	2.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E29	ji	XC6382A291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E29	jk	XC6385A291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E29A	-	ML6102N292P	Vdet-IC	2.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E3	-	ELM9743NAB	Vdet-IC	4.3V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
E3	-	KIC3201S-53	LVR-IC	LDO, 5.3V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E3	-	TC54VC4302MB	Vdet-IC	4.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
E30	ji	XC6382A301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E30	jk	XC6385A301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E30A	-	ML6102N302P	Vdet-IC	3.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E31	ji	XC6382A311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E31	jk	XC6385A311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E31A	-	ML6102N312P	Vdet-IC	3.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E32	ji	XC6382A321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E32	jk	XC6385A321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E32A	-	ML6102N322P	Vdet-IC	3.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E33	-	XC61CC4302P	Vdet-IC	4.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
E33	-	XE61CC4345PR	Vdet-IC	4.3V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
E33	ji	XC6382A331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E33	jk	XC6385A331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E33A	-	ML6102N332P	Vdet-IC	3.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E34	ji	XC6382A341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E34	jk	XC6385A341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E34A	-	ML6102N342P	Vdet-IC	3.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E35	-	LN61FC4312P	Vdet-IC	4.3V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
E35	-	XC61FC4312P	Vdet-IC	4.3V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
E35	ji	XC6382A351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E35	jk	XC6385A351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E35A	-	ML6102N352P	Vdet-IC	3.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E36	-	LN61FC4342P	Vdet-IC	4.3V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
E36	-	XC61FC4342P	Vdet-IC	4.3V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
E36	ji	XC6382A361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E36	jk	XC6385A361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E36A	-	ML6102N362P	Vdet-IC	3.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E37	-	LN61FC4352P	Vdet-IC	4.3V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
E37	-	XC61FC4352P	Vdet-IC	4.3V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
E37	ji	XC6382A371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E37	jk	XC6385A371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E37A	-	ML6102N372P	Vdet-IC	3.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E38	ji	XC6382A381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E38	jk	XC6385A381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E38A	-	ML6102N382P	Vdet-IC	3.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E39	ji	XC6382A391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E39	jk	XC6385A391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E39A	-	ML6102N392P	Vdet-IC	3.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E3A	-	LM431BK	Vref-IC	Adjust, Precision, Shunt, 2.44..2.55V±0.4%	SOT-89	20rb	RF2	4g	Ttr
E3B	-	LM431AK	Vref-IC	Adjust, Precision, Shunt, 2.44..2.55V±0.8%	SOT-89	20rb	RF2	4g	Ttr
E4	-	ELM9744NAB	Vdet-IC	4.4V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
E4	-	KIC3201S-54	LVR-IC	LDO, 5.4V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
E4	-	TC54VC4402MB	Vdet-IC	4.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
E40	ji	XC6382A401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E40	jk	XC6385A401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E40A	-	ML6102N402P	Vdet-IC	4.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E41	ji	XC6382A411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E41	jk	XC6385A411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E41A	-	ML6102N412P	Vdet-IC	4.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E42	ji	XC6382A421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E42	jk	XC6385A421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E42A	-	ML6102N422P	Vdet-IC	4.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E43	-	XC61CC4402P	Vdet-IC	4.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
E43	-	XE61CC4445PR	Vdet-IC	4.4V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
E43	ji	XC6382A431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E43	jk	XC6385A431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E43A	-	ML6102N432P	Vdet-IC	4.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E44	ji	XC6382A441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E44	jk	XC6385A441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E44A	-	ML6102N442P	Vdet-IC	4.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E45	-	LN61FC4412P	Vdet-IC	4.4V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
E45	-	XC61FC4412P	Vdet-IC	4.4V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
E45	ji	XC6382A451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E45	jk	XC6385A451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E45A	-	ML6102N452P	Vdet-IC	4.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E46	-	LN61FC4442P	Vdet-IC	4.4V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
E46	-	XC61FC4442P	Vdet-IC	4.4V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
E46	ji	XC6382A461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E46	jk	XC6385A461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E46A	-	ML6102N462P	Vdet-IC	4.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E47	-	LN61FC4452P	Vdet-IC	4.4V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
E47	-	XC61FC4452P	Vdet-IC	4.4V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
E47	ji	XC6382A471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E47	jk	XC6385A471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E47A	-	ML6102N472P	Vdet-IC	4.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E48	ji	XC6382A481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E48	jk	XC6385A481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E48A	-	ML6102N482P	Vdet-IC	4.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E49	ji	XC6382A491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E49	jk	XC6385A491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E49A	-	ML6102N492P	Vdet-IC	4.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E5	-	ELM9745NAB	Vdet-IC	4.5V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
E5	-	KIC3201S-55	LVR-IC	LDO, 5.5V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
E5	-	TC54VC4502MB	Vdet-IC	4.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
E50	ji	XC6382A501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E50	jk	XC6385A501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E50A	-	ML6102N502P	Vdet-IC	5.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E51	ji	XC6382A511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E51	jk	XC6385A511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E51A	-	ML6102N512P	Vdet-IC	5.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E52	ji	XC6382A521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E52	jk	XC6385A521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E52A	-	ML6102N522P	Vdet-IC	5.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E53	-	XC61CC4502P	Vdet-IC	4.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
E53	-	XE61CC4545PR	Vdet-IC	4.5V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
E53	ji	XC6382A531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E53	jk	XC6385A531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E53A	-	ML6102N532P	Vdet-IC	5.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E54	ji	XC6382A541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E54	jk	XC6385A541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E54A	-	ML6102N542P	Vdet-IC	5.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E55	-	LN61FC4512P	Vdet-IC	4.5V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
E55	-	XC61FC4512P	Vdet-IC	4.5V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
E55	ji	XC6382A551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E55	jk	XC6385A551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E55A	-	ML6102N552P	Vdet-IC	5.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E56	-	LN61FC4542P	Vdet-IC	4.5V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
E56	-	XC61FC4542P	Vdet-IC	4.5V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
E56	ji	XC6382A561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E56	jk	XC6385A561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E56A	-	ML6102N562P	Vdet-IC	5.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E57	-	LN61FC4552P	Vdet-IC	4.5V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
E57	-	XC61FC4552P	Vdet-IC	4.5V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
E57	ji	XC6382A571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E57	jk	XC6385A571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E57A	-	ML6102N572P	Vdet-IC	5.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E58	ji	XC6382A581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E58	jk	XC6385A581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E58A	-	ML6102N582P	Vdet-IC	5.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E59	ji	XC6382A591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E59	jk	XC6385A591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E59A	-	ML6102N592P	Vdet-IC	5.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E6	-	ELM9746NAB	Vdet-IC	4.6V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
E6	-	KIC3201S-56	LVR-IC	LDO, 5.6V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
E6	-	TC54VC4602MB	Vdet-IC	4.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
E60	ji	XC6382A601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E60	jk	XC6385A601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E60A	-	ML6102N602P	Vdet-IC	6.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
E61	ji	XC6382A611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E61	jk	XC6385A611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E62	ji	XC6382A621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E62	jk	XC6385A621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E63	-	XC61CC4602P	Vdet-IC	4.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
E63	-	XE61CC4645PR	Vdet-IC	4.6V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
E63	ji	XC6382A631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E63	jk	XC6385A631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E64	ji	XC6382A641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E64	jk	XC6385A641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E65	-	LN61FC4612P	Vdet-IC	4.6V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E65	-	XC61FC4612P	Vdet-IC	4.6V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
E65	ji	XC6382A651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E65	jk	XC6385A651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E66	-	LN61FC4642P	Vdet-IC	4.6V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
E66	-	XC61FC4642P	Vdet-IC	4.6V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
E66	ji	XC6382A661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E66	jk	XC6385A661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E67	-	LN61FC4652P	Vdet-IC	4.6V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
E67	-	XC61FC4652P	Vdet-IC	4.6V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
E67	ji	XC6382A671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E67	jk	XC6385A671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E68	ji	XC6382A681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E68	jk	XC6385A681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E69	ji	XC6382A691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E69	jk	XC6385A691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E7	-	ELM9747NAB	Vdet-IC	4.7V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
E7	-	KIC3201S-57	LVR-IC	LDO, 5.7V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
E7	-	TC54VC4702MB	Vdet-IC	4.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
E70	ji	XC6382A701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
E70	jk	XC6385A701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4z	Tor
E72	-	2SB772PT-E	Si-pnp	AF, Sw, 30V, 3A, B=250..500, 300MHz	SOT-89	20tb	-	4g	Chm
E723	-	AZ7023RTR-E1	Vdet-IC	2.3V±1.5%, -Reset OCO	SOT-89	20vdd	VD6	4g	Bcd
E725	-	AZ7025RTR-E1	Vdet-IC	2.5V±1.5%, -Reset OCO	SOT-89	20vdd	VD6	4g	Bcd
E727	-	AZ7027RTR-E1	Vdet-IC	2.7V±1.5%, -Reset OCO	SOT-89	20vdd	VD6	4g	Bcd
E729	-	AZ7029RTR-E1	Vdet-IC	2.9V±1.5%, -Reset OCO	SOT-89	20vdd	VD6	4g	Bcd
E73	-	XC61CC4702P	Vdet-IC	4.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
E73	-	XE61CC4745PR	Vdet-IC	4.7V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
E731	-	AZ7031RTR-E1	Vdet-IC	3.1V±1.5%, -Reset OCO	SOT-89	20vdd	VD6	4g	Bcd
E733	-	AZ7033RTR-E1	Vdet-IC	3.3V±1.5%, -Reset OCO	SOT-89	20vdd	VD6	4g	Bcd
E742	-	AZ7042RTR-E1	Vdet-IC	4.2V±1.5%, -Reset OCO	SOT-89	20vdd	VD6	4g	Bcd
E745	-	AZ7045RTR-E1	Vdet-IC	4.5V±1.5%, -Reset OCO	SOT-89	20vdd	VD6	4g	Bcd
E75	-	LN61FC4712P	Vdet-IC	4.7V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
E75	-	XC61FC4712P	Vdet-IC	4.7V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
E76	-	LN61FC4742P	Vdet-IC	4.7V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
E76	-	XC61FC4742P	Vdet-IC	4.7V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
E77	-	LN61FC4752P	Vdet-IC	4.7V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
E77	-	XC61FC4752P	Vdet-IC	4.7V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
E8	-	ELM9748NAB	Vdet-IC	4.8V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
E8	-	KIC3201S-58	LVR-IC	LDO, 5.8V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
E8	-	TC54VC4802MB	Vdet-IC	4.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
E83	-	XC61CC4802P	Vdet-IC	4.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
E83	-	XE61CC4845PR	Vdet-IC	4.8V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
E85	-	LN61FC4812P	Vdet-IC	4.8V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
E85	-	XC61FC4812P	Vdet-IC	4.8V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
E86	-	LN61FC4842P	Vdet-IC	4.8V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
E86	-	XC61FC4842P	Vdet-IC	4.8V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
E87	-	LN61FC4852P	Vdet-IC	4.8V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
E87	-	XC61FC4852P	Vdet-IC	4.8V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
E9	-	ELM9749NAB	Vdet-IC	4.9V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
E9	-	KIC3201S-59	LVR-IC	LDO, 5.9V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
E9	-	TC54VC4902MB	Vdet-IC	4.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
E93	-	XC61CC4902P	Vdet-IC	4.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
E93	-	XE61CC4945PR	Vdet-IC	4.9V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
E95	-	LN61FC4912P	Vdet-IC	4.9V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
E95	-	XC61FC4912P	Vdet-IC	4.9V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
E96	-	LN61FC4942P	Vdet-IC	4.9V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
E96	-	XC61FC4942P	Vdet-IC	4.9V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
E97	-	LN61FC4952P	Vdet-IC	4.9V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
E97	-	XC61FC4952P	Vdet-IC	4.9V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
EA	-	2SD1420-A	Si-npn	AF, 180V, 1.5A, 1W, B=60..120	SOT-89	20tb	-	4b	Ren
EA	-	ELM99601B	LVR-IC	LDO, 6.0V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
EA0	-	XC6902N091PR-G	LVR-IC	-0.9V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EA1	-	XC6902N101PR-G	LVR-IC	-1.0V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EA2	-	XC6902N111PR-G	LVR-IC	-1.1V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EA3	-	XC6902N121PR-G	LVR-IC	-1.2V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EA4	-	XC6902N131PR-G	LVR-IC	-1.3V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EA5	-	XC6902N141PR-G	LVR-IC	-1.4V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EA6	-	XC6902N151PR-G	LVR-IC	-1.5V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EA7	-	XC6902N161PR-G	LVR-IC	-1.6V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EA8	-	XC6902N171PR-G	LVR-IC	-1.7V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EA9	-	XC6902N181PR-G	LVR-IC	-1.8V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAA	-	XC6902N191PR-G	LVR-IC	-1.9V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAB	-	XC6902N201PR-G	LVR-IC	-2.0V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAC	-	XC6902N211PR-G	LVR-IC	-2.1V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAD	-	XC6902N221PR-G	LVR-IC	-2.2V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAE	-	2SC5415-E	Si-npn	HF, LN, 20V, 100mA, 800mW, B=90..180, 6.7GHz	PCP	20tb	-	4a	San
EAE	-	XC6902N231PR-G	LVR-IC	-2.3V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAF	-	2SC5415-F	Si-npn	HF, LN, 20V, 100mA, 800mW, B=135..270, 6.7GHz	PCP	20tb	-	4a	San
EAF	-	XC6902N241PR-G	LVR-IC	-2.4V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAH	-	XC6902N251PR-G	LVR-IC	-2.5V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAK	-	XC6902N261PR-G	LVR-IC	-2.6V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAL	-	XC6902N271PR-G	LVR-IC	-2.7V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAM	-	XC6902N281PR-G	LVR-IC	-2.8V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAN	-	XC6902N291PR-G	LVR-IC	-2.9V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAP	-	XC6902N301PR-G	LVR-IC	-3.0V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAR	-	XC6902N311PR-G	LVR-IC	-3.1V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAS	-	XC6902N321PR-G	LVR-IC	-3.2V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAT	-	XC6902N331PR-G	LVR-IC	-3.3V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAU	-	XC6902N341PR-G	LVR-IC	-3.4V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAV	-	XC6902N351PR-G	LVR-IC	-3.5V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAX	-	XC6902N361PR-G	LVR-IC	-3.6V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAY	-	XC6902N371PR-G	LVR-IC	-3.7V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EAZ	-	XC6902N381PR-G	LVR-IC	-3.8V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EB	-	2SD1420-B	Si-npn	AF, 180V, 1.5A, 1W, B=60..120	SOT-89	20tb	-	4b	Ren
EB0	-	XC6902N391PR-G	LVR-IC	-3.9V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EB1	-	XC6902N401PR-G	LVR-IC	-4.0V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EB2	-	XC6902N411PR-G	LVR-IC	-4.1V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EB3	-	XC6902N421PR-G	LVR-IC	-4.2V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EB4	-	XC6902N431PR-G	LVR-IC	-4.3V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EB5	-	XC6902N441PR-G	LVR-IC	-4.4V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EB6	-	XC6902N451PR-G	LVR-IC	-4.5V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EB7	-	XC6902N461PR-G	LVR-IC	-4.6V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EB8	-	XC6902N471PR-G	LVR-IC	-4.7V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EB9	-	XC6902N481PR-G	LVR-IC	-4.8V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBA	-	XC6902N491PR-G	LVR-IC	-4.9V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBB	-	XC6902N501PR-G	LVR-IC	-5.0V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBC	-	XC6902N511PR-G	LVR-IC	-5.1V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBD	-	XC6902N521PR-G	LVR-IC	-5.2V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBE	-	2SC5551-E	Si-npn	HF, 40V, 300mA, 1.3W, B=90..180, 3.5GHz	SOT-89	20tb	-	4a	San
EBE	-	XC6902N531PR-G	LVR-IC	-5.3V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBF	-	2SC5551-F	Si-npn	HF, 40V, 300mA, 1.3W, B=135..270, 3.5GHz	SOT-89	20tb	-	4a	San
EBF	-	XC6902N541PR-G	LVR-IC	-5.4V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBH	-	XC6902N551PR-G	LVR-IC	-5.5V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBK	-	XC6902N561PR-G	LVR-IC	-5.6V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBL	-	XC6902N571PR-G	LVR-IC	-5.7V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBM	-	XC6902N581PR-G	LVR-IC	-5.8V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBN	-	XC6902N591PR-G	LVR-IC	-5.9V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBP	-	XC6902N601PR-G	LVR-IC	-6.0V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBR	-	XC6902N611PR-G	LVR-IC	-6.1V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBS	-	XC6902N621PR-G	LVR-IC	-6.2V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBT	-	XC6902N631PR-G	LVR-IC	-6.3V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBU	-	XC6902N641PR-G	LVR-IC	-6.4V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBV	-	XC6902N651PR-G	LVR-IC	-6.5V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBX	-	XC6902N661PR-G	LVR-IC	-6.6V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBY	-	XC6902N671PR-G	LVR-IC	-6.7V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EBZ	-	XC6902N681PR-G	LVR-IC	-6.8V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EC	-	2SA1368-C	Si-pnp	AF, 100V, 500mA, 500mW, B=55..110, 130MHz	SOT-89	20tb	-	4b	Mit
EC	-	2SD1420-C	Si-npn	AF, 180V, 1.5A, 1W, B=160..320	SOT-89	20tb	-	4b	Ren
EC0	-	XC6902N691PR-G	LVR-IC	-6.9V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EC1	-	XC6902N701PR-G	LVR-IC	-7.0V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EC2	-	XC6902N711PR-G	LVR-IC	-7.1V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EC3	-	XC6902N721PR-G	LVR-IC	-7.2V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EC4	-	XC6902N731PR-G	LVR-IC	-7.3V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EC5	-	XC6902N741PR-G	LVR-IC	-7.4V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EC6	-	XC6902N751PR-G	LVR-IC	-7.5V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EC7	-	XC6902N761PR-G	LVR-IC	-7.6V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EC8	-	XC6902N771PR-G	LVR-IC	-7.7V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EC9	-	XC6902N781PR-G	LVR-IC	-7.8V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECA	-	XC6902N791PR-G	LVR-IC	-7.9V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECB	-	XC6902N801PR-G	LVR-IC	-8.0V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ECC	-	XC6902N811PR-G	LVR-IC	-8.1V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECD	-	XC6902N821PR-G	LVR-IC	-8.2V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECE	-	XC6902N831PR-G	LVR-IC	-8.3V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECF	-	XC6902N841PR-G	LVR-IC	-8.4V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECH	-	XC6902N851PR-G	LVR-IC	-8.5V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECK	-	XC6902N861PR-G	LVR-IC	-8.6V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECL	-	XC6902N871PR-G	LVR-IC	-8.7V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECM	-	XC6902N881PR-G	LVR-IC	-8.8V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECN	-	XC6902N891PR-G	LVR-IC	-8.9V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECP	-	XC6902N901PR-G	LVR-IC	-9.0V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECR	-	XC6902N911PR-G	LVR-IC	-9.1V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECS	-	XC6902N921PR-G	LVR-IC	-9.2V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECT	-	XC6902N931PR-G	LVR-IC	-9.3V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECU	-	XC6902N941PR-G	LVR-IC	-9.4V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECV	-	XC6902N951PR-G	LVR-IC	-9.5V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECX	-	XC6902N961PR-G	LVR-IC	-9.6V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECY	-	XC6902N971PR-G	LVR-IC	-9.7V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ECZ	-	XC6902N981PR-G	LVR-IC	-9.8V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ED	-	2SA1368-D	Si-pnp	AF, 100V, 500mA, 500mW, B=90..180, 130MHz	SOT-89	20tb	-	4b	Mit
ED	-	2SD1421-D	Si-npn	AF, 180V, 1.5A, 1W, B=60..120	SOT-89	20tb	-	4b	Ren
ED	-	BCV28	Si-pnp-Darl	AF, 40V, 500mA, 1.3W, 220MHz, B>4000	SOT-89	20tb	-	4b	Phi
ED0	-	XC6902N991PR-G	LVR-IC	-9.9V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ED1	-	XC6902NA01PR-G	LVR-IC	-10.0V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ED2	-	XC6902NA11PR-G	LVR-IC	-10.1V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ED3	-	XC6902NA21PR-G	LVR-IC	-10.2V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ED4	-	XC6902NA31PR-G	LVR-IC	-10.3V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ED5	-	XC6902NA41PR-G	LVR-IC	-10.4V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ED6	-	XC6902NA51PR-G	LVR-IC	-10.5V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ED7	-	XC6902NA61PR-G	LVR-IC	-10.6V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ED8	-	XC6902NA71PR-G	LVR-IC	-10.7V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
ED9	-	XC6902NA81PR-G	LVR-IC	-10.8V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EDA	-	XC6902NA91PR-G	LVR-IC	-10.9V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EDB	-	XC6902NB01PR-G	LVR-IC	-11.0V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EDC	-	XC6902NB11PR-G	LVR-IC	-11.1V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EDD	-	XC6902NB21PR-G	LVR-IC	-11.2V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EDE	-	XC6902NB31PR-G	LVR-IC	-11.3V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EDF	-	XC6902NB41PR-G	LVR-IC	-11.4V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EDH	-	XC6902NB51PR-G	LVR-IC	-11.5V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EDK	-	XC6902NB61PR-G	LVR-IC	-11.6V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EDL	-	XC6902NB71PR-G	LVR-IC	-11.7V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EDM	-	XC6902NB81PR-G	LVR-IC	-11.8V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EDN	-	XC6902NB91PR-G	LVR-IC	-11.9V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EDP	-	XC6902NC01PR-G	LVR-IC	-12.0V±1.5%, 500mA, soft start	SOT-89	20vl	VR2	4a	Tor
EE	-	2SA1368-E	Si-pnp	AF, 100V, 500mA, 500mW, B=150..300, 130MHz	SOT-89	20tb	-	4b	Mit
EE	-	2SD1421-E	Si-npn	AF, 180V, 1.5A, 1W, B=100..200	SOT-89	20tb	-	4b	Ren
EE	-	BCV48	Si-pnp-Darl	AF, 80V, 500mA, 1.3W, 220MHz, B>2000	SOT-89	20tb	-	4b	Phi
EF	-	BCV29	Si-npn-Darl	AF, 40V, 500mA, 1.3W, 220MHz, B>4000	SOT-89	20tb	-	4b	Phi
EG	-	BCV49	Si-npn-Darl	AF, 80V, 500mA, 1.3W, 220MHz, B>2000	SOT-89	20tb	-	4b	Phi
EH	-	2SB1027-H	Si-pnp	AF, 180V, 1.5A, 1W, B=60..120, >100MHz	SOT-89	20tb	-	4b	Ren
EH-	-	RT9261A-32PX	DC-DC-IC	VFM step-up, 3.2V±2%, 50mA	SOT-89	20bq	DC2	4b	Rct
EJ	-	2SB1027-J	Si-pnp	AF, 180V, 1.5A, 1W, B=100..200, >100MHz	SOT-89	20tb	-	4b	Ren
EJ-	-	RT9261A-33PX	DC-DC-IC	VFM step-up, 3.3V±2%, 50mA	SOT-89	20bq	DC2	4b	Rct
EK	-	2SB1027-K	Si-pnp	AF, 180V, 1.5A, 1W, B=160..320, >100MHz	SOT-89	20tb	-	4b	Ren
EK	-	2SD1001-K	Si-npn	AF-Amp, 80V, 300mA, 2W, 140MHz, B=200..400	SOT-89	20tb	-	4a	Nec
EL	-	2SB1028-L	Si-pnp	AF, 180V, 1.5A, 1W, B=60..120, >100MHz	SOT-89	20tb	-	4b	Ren
EL	-	2SD1001-L	Si-npn	AF-Amp, 80V, 300mA, 2W, 140MHz, B=135..270	SOT-89	20tb	-	4a	Nec
EM	-	2SB1028-M	Si-pnp	AF, 180V, 1.5A, 1W, B=100..200, >100MHz	SOT-89	20tb	-	4b	Ren
EM	-	2SD1001-M	Si-npn	AF-Amp, 80V, 300mA, 2W, 140MHz, B=90..180	SOT-89	20tb	-	4a	Nec
EO	-	2SC2882-O	Si-npn	GP, 80V, 400mA, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4b	Tos
EO	-	KTC4374-O	Si-npn	GP, AF, 80V, 400mA, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4a	Kec
EP	-	2SB789A-P	Si-pnp	AF-Drv, 120V, 1A, 1W, B=60..120, 120MHz	SOT-89	20tb	-	4b	Pan
EQ	-	2SB789A-Q	Si-pnp	AF-Drv, 120V, 1A, 1W, B=90.155, 120MHz	SOT-89	20tb	-	4b	Pan
ER	-	2SB789A-R	Si-pnp	AF-Drv, 120V, 1A, 1W, B=130..220, 120MHz	SOT-89	20tb	-	4b	Pan
ER	-	2SC4807	Si-npn	VHF/UHF, 20V, 200mA, 800mW, 4.4GHz, B=50..250	SOT-89	20tb	-	4b	Ren
ES	-	2SB789A-S	Si-pnp	AF-Drv, 120V, 1A, 1W, B=170..340, 120MHz	SOT-89	20tb	-	4b	Pan
ES	-	2SD1974	Si-npn+Di	AF, 25V, 800mA, 1W, B=250..1200	UPAK	20tb	-	4b	Ren
ET	-	2SD1471-E	Si-npn-Darl+Di	GP, 40V, 300mA, 1W, B=5000..100K	SOT-89	20te	-	4b	Ren
EX	-	2SD2402-X	Si-npn	AF, Sw, 50V, 5A, 2W, 170MHz, B=100..200	SOT-89	20tb	-	4b	Nec
EY	-	2SC2882-Y	Si-npn	GP, 80V, 400mA, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4b	Tos
EY	-	2SD2402-Y	Si-npn	AF, Sw, 50V, 5A, 2W, 170MHz, B=160..320	SOT-89	20tb	-	4b	Nec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EY	-	2SK1697	n-MOSFET	V-MOS, LogL, 60V, 0.5A,<1.7Ω(0.5A)	SOT-89	20fa	-	4b	Ren
EY	-	KTC4374-Y	Si-npn	GP, AF, 80V, 400mA, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4a	Kec
EZ	-	2SD2402-Z	Si-npn	AF, Sw, 50V, 5A, 2W, 170MHz, B=200..400	SOT-89	20tb	-	4b	Nec
F0	-	ELM9750NAB	Vdet-IC	5.0V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
F0	-	KIC3201S-60	LVR-IC	LDO, 6.0V±2%, 400mA	SOT-89	20vl	VR1	4p	Kec
F0	-	TC54VC5002MB	Vdet-IC	5.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
F03	-	XC61CC5002P	Vdet-IC	5.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
F03	-	XE61CC5045PR	Vdet-IC	5.0V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
F05	-	LN61FC5012P	Vdet-IC	5.0V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
F05	-	XC61FC5012P	Vdet-IC	5.0V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
F06	-	LN61FC5042P	Vdet-IC	5.0V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
F06	-	XC61FC5042P	Vdet-IC	5.0V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
F07	-	LN61FC5052P	Vdet-IC	5.0V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
F07	-	XC61FC5052P	Vdet-IC	5.0V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
F1	-	ELM9751NAB	Vdet-IC	5.1V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
F1	-	TC54VC5102MB	Vdet-IC	5.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
F13	-	XC61CC5102P	Vdet-IC	5.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
F13	-	XE61CC5145PR	Vdet-IC	5.1V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
F15	-	LN61FC5112P	Vdet-IC	5.1V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
F15	-	XC61FC5112P	Vdet-IC	5.1V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
F16	-	LN61FC5142P	Vdet-IC	5.1V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
F16	-	XC61FC5142P	Vdet-IC	5.1V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
F17	-	LN61FC5152P	Vdet-IC	5.1V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
F17	-	XC61FC5152P	Vdet-IC	5.1V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
F2	-	ELM9752NAB	Vdet-IC	5.2V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
F2	-	TC54VC5202MB	Vdet-IC	5.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
F20	ji	XC6382B201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F21	ji	XC6382B211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F22	ji	XC6382B221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F23	-	XC61CC5202P	Vdet-IC	5.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
F23	-	XE61CC5245PR	Vdet-IC	5.2V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
F23	ji	XC6382B231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F24	ji	XC6382B241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F25	-	LN61FC5212P	Vdet-IC	5.2V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
F25	-	XC61FC5212P	Vdet-IC	5.2V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
F25	ji	XC6382B251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F26	-	LN61FC5242P	Vdet-IC	5.2V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
F26	-	XC61FC5242P	Vdet-IC	5.2V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
F26	ji	XC6382B261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F27	-	LN61FC5252P	Vdet-IC	5.2V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
F27	-	XC61FC5252P	Vdet-IC	5.2V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
F27	ji	XC6382B271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F28	ji	XC6382B281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F29	ji	XC6382B291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F2K	-	LN6203E182M	LVR-IC	LDO, 1.8V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F2L	-	LN6203E192M	LVR-IC	LDO, 1.9V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F2M	-	LN6203E202M	LVR-IC	LDO, 2.0V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F2N	-	LN6203E212M	LVR-IC	LDO, 2.1V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F2P	-	LN6203E222M	LVR-IC	LDO, 2.2V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F2R	-	LN6203E232M	LVR-IC	LDO, 2.3V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F2S	-	LN6203E242M	LVR-IC	LDO, 2.4V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F2T	-	LN6203E252M	LVR-IC	LDO, 2.5V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F2U	-	LN6203E262M	LVR-IC	LDO, 2.6V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F2V	-	LN6203E272M	LVR-IC	LDO, 2.7V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F2X	-	LN6203E282M	LVR-IC	LDO, 2.8V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F2Y	-	LN6203E292M	LVR-IC	LDO, 2.9V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F2Z	-	LN6203E302M	LVR-IC	LDO, 3.0V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3	-	ELM9753NAB	Vdet-IC	5.3V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
F3	-	TC54VC5302MB	Vdet-IC	5.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
F30	-	LN6203E312M	LVR-IC	LDO, 3.1V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F30	ji	XC6382B301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F31	-	LN6203E322M	LVR-IC	LDO, 3.2V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F31	ji	XC6382B311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F32	-	LN6203E332M	LVR-IC	LDO, 3.3V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F32	ji	XC6382B321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F33	-	LN6203E342M	LVR-IC	LDO, 3.4V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F33	-	XC61CC5302P	Vdet-IC	5.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
F33	-	XE61CC5345PR	Vdet-IC	5.3V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
F33	ji	XC6382B331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F34	-	LN6203E352M	LVR-IC	LDO, 3.5V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F34	ji	XC6382B341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F35	-	LN61FC5312P	Vdet-IC	5.3V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
F35	-	LN6203E362M	LVR-IC	LDO, 3.6V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F35	-	XC61FC5312P	Vdet-IC	5.3V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
F35	ji	XC6382B351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F36	-	LN61FC5342P	Vdet-IC	5.3V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
F36	-	LN6203E372M	LVR-IC	LDO, 3.7V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F36	-	XC61FC5342P	Vdet-IC	5.3V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
F36	ji	XC6382B361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F37	-	LN61FC5352P	Vdet-IC	5.3V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
F37	-	LN6203E382M	LVR-IC	LDO, 3.8V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F37	-	XC61FC5352P	Vdet-IC	5.3V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
F37	ji	XC6382B371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F38	-	LN6203E392M	LVR-IC	LDO, 3.9V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F38	ji	XC6382B381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F39	-	LN6203E402M	LVR-IC	LDO, 4.0V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F39	ji	XC6382B391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F3A	-	LN6203E412M	LVR-IC	LDO, 4.1V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3B	-	LN6203E422M	LVR-IC	LDO, 4.2V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3C	-	LN6203E432M	LVR-IC	LDO, 4.3V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3D	-	LN6203E442M	LVR-IC	LDO, 4.4V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3E	-	LN6203E452M	LVR-IC	LDO, 4.5V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3F	-	LN6203E462M	LVR-IC	LDO, 4.6V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3H	-	LN6203E472M	LVR-IC	LDO, 4.7V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3K	-	LN6203E482M	LVR-IC	LDO, 4.8V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3L	-	LN6203E492M	LVR-IC	LDO, 4.9V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3M	-	LN6203E502M	LVR-IC	LDO, 5.0V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3N	-	LN6203E512M	LVR-IC	LDO, 5.1V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3P	-	LN6203E522M	LVR-IC	LDO, 5.2V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3R	-	LN6203E532M	LVR-IC	LDO, 5.3V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3S	-	LN6203E542M	LVR-IC	LDO, 5.4V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3T	-	LN6203E552M	LVR-IC	LDO, 5.5V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3U	-	LN6203E562M	LVR-IC	LDO, 5.6V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3V	-	LN6203E572M	LVR-IC	LDO, 5.7V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3X	-	LN6203E582M	LVR-IC	LDO, 5.8V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3Y	-	LN6203E592M	LVR-IC	LDO, 5.9V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F3Z	-	LN6203E602M	LVR-IC	LDO, 6.0V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F4	-	ELM9754NAB	Vdet-IC	5.4V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
F4	-	LN6203E2A2M	LVR-IC	LDO, 2.85V±2%, 400mA	SOT-89	20vl	VR1	4z	Inw
F4	-	TC54VC5402MB	Vdet-IC	5.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
F40	ji	XC6382B401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F41	ji	XC6382B411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F42	ji	XC6382B421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F43	-	XC61CC5402P	Vdet-IC	5.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
F43	-	XE61CC5445PR	Vdet-IC	5.4V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
F43	ji	XC6382B431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F44	ji	XC6382B441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F45	-	LN61FC5412P	Vdet-IC	5.4V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
F45	-	XC61FC5412P	Vdet-IC	5.4V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
F45	ji	XC6382B451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F46	-	LN61FC5442P	Vdet-IC	5.4V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
F46	-	XC61FC5442P	Vdet-IC	5.4V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
F46	ji	XC6382B461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F47	-	LN61FC5452P	Vdet-IC	5.4V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
F47	-	XC61FC5452P	Vdet-IC	5.4V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
F47	ji	XC6382B471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F48	ji	XC6382B481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F49	ji	XC6382B491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F5	-	ELM9755NAB	Vdet-IC	5.5V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
F5	-	TC54VC5502MB	Vdet-IC	5.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
F50	ji	XC6382B501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F51	ji	XC6382B511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F52	ji	XC6382B521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F53	-	XC61CC5502P	Vdet-IC	5.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
F53	-	XE61CC5545PR	Vdet-IC	5.5V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
F53	ji	XC6382B531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F54	ji	XC6382B541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F55	-	LN61FC5512P	Vdet-IC	5.5V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
F55	-	XC61FC5512P	Vdet-IC	5.5V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
F55	ji	XC6382B551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F56	-	LN61FC5542P	Vdet-IC	5.5V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
F56	-	XC61FC5542P	Vdet-IC	5.5V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
F56	ji	XC6382B561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F57	-	LN61FC5552P	Vdet-IC	5.5V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
F57	-	XC61FC5552P	Vdet-IC	5.5V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
F57	ji	XC6382B571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F58	ji	XC6382B581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F59	ji	XC6382B591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F5K	-	LN6203P182M	LVR-IC	LDO, 1.8V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F5L	-	LN6203P192M	LVR-IC	LDO, 1.9V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F5M	-	LN6203P202M	LVR-IC	LDO, 2.0V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F5N	-	LN6203P212M	LVR-IC	LDO, 2.1V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F5P	-	LN6203P222M	LVR-IC	LDO, 2.2V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F5R	-	LN6203P232M	LVR-IC	LDO, 2.3V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F5S	-	LN6203P242M	LVR-IC	LDO, 2.4V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F5T	-	LN6203P252M	LVR-IC	LDO, 2.5V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F5U	-	LN6203P262M	LVR-IC	LDO, 2.6V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F5V	-	LN6203P272M	LVR-IC	LDO, 2.7V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F5X	-	LN6203P282M	LVR-IC	LDO, 2.8V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F5Y	-	LN6203P292M	LVR-IC	LDO, 2.9V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F5Z	-	LN6203P302M	LVR-IC	LDO, 3.0V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6	-	ELM9816AB	LVR-IC	1.6V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
F6	-	TC54VC5602MB	Vdet-IC	5.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
F60	-	LN6203P312M	LVR-IC	LDO, 3.1V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F60	ji	XC6382B601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F61	-	LN6203P322M	LVR-IC	LDO, 3.2V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F61	ji	XC6382B611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F62	-	LN6203P332M	LVR-IC	LDO, 3.3V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F62	ji	XC6382B621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F63	-	LN6203P342M	LVR-IC	LDO, 3.4V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F63	-	XC61CC5602P	Vdet-IC	5.6V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
F63	-	XE61CC5645PR	Vdet-IC	5.6V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
F63	ji	XC6382B631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F64	-	LN6203P352M	LVR-IC	LDO, 3.5V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F64	ji	XC6382B641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F65	-	LN61FC5612P	Vdet-IC	5.6V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
F65	-	LN6203P362M	LVR-IC	LDO, 3.6V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F65	-	XC61FC5612P	Vdet-IC	5.6V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
F65	ji	XC6382B651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F66	-	LN61FC5642P	Vdet-IC	5.6V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
F66	-	LN6203P372M	LVR-IC	LDO, 3.7V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F66	-	XC61FC5642P	Vdet-IC	5.6V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
F66	ji	XC6382B661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F67	-	LN61FC5652P	Vdet-IC	5.6V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
F67	-	LN6203P382M	LVR-IC	LDO, 3.8V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F67	-	XC61FC5652P	Vdet-IC	5.6V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
F67	ji	XC6382B671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F68	-	LN6203P392M	LVR-IC	LDO, 3.9V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F68	ji	XC6382B681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F69	-	LN6203P402M	LVR-IC	LDO, 4.0V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F69	ji	XC6382B691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F6A	-	LN6203P412M	LVR-IC	LDO, 4.1V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6B	-	LN6203P422M	LVR-IC	LDO, 4.2V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6C	-	LN6203P432M	LVR-IC	LDO, 4.3V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6D	-	LN6203P442M	LVR-IC	LDO, 4.4V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6E	-	LN6203P452M	LVR-IC	LDO, 4.5V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6F	-	LN6203P462M	LVR-IC	LDO, 4.6V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6H	-	LN6203P472M	LVR-IC	LDO, 4.7V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6K	-	LN6203P482M	LVR-IC	LDO, 4.8V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6L	-	LN6203P492M	LVR-IC	LDO, 4.9V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6M	-	LN6203P502M	LVR-IC	LDO, 5.0V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6N	-	LN6203P512M	LVR-IC	LDO, 5.1V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6P	-	LN6203P522M	LVR-IC	LDO, 5.2V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6R	-	LN6203P532M	LVR-IC	LDO, 5.3V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6S	-	LN6203P542M	LVR-IC	LDO, 5.4V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6T	-	LN6203P552M	LVR-IC	LDO, 5.5V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6U	-	LN6203P562M	LVR-IC	LDO, 5.6V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6V	-	LN6203P572M	LVR-IC	LDO, 5.7V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6X	-	LN6203P582M	LVR-IC	LDO, 5.8V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F6Y	-	LN6203P592M	LVR-IC	LDO, 5.9V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F6Z	-	LN6203P602M	LVR-IC	LDO, 6.0V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F7	-	ELM9817AB	LVR-IC	1.7V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
F7	-	LN6203P2A2M	LVR-IC	LDO, 2.85V±2%, 400mA, OCL	SOT-89	20vl	VR1	4z	Inw
F7	-	TC54VC5702MB	Vdet-IC	5.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
F70	ji	XC6382B701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
F73	-	XC61CC5702P	Vdet-IC	5.7V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
F73	-	XE61CC5745PR	Vdet-IC	5.7V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
F75	-	LN61FC5712P	Vdet-IC	5.7V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
F75	-	XC61FC5712P	Vdet-IC	5.7V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
F76	-	LN61FC5742P	Vdet-IC	5.7V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
F76	-	XC61FC5742P	Vdet-IC	5.7V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
F77	-	LN61FC5752P	Vdet-IC	5.7V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
F77	-	XC61FC5752P	Vdet-IC	5.7V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
F8	-	ELM9818AB	LVR-IC	1.8V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
F8	-	TC54VC5802MB	Vdet-IC	5.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
F83	-	XC61CC5802P	Vdet-IC	5.8V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
F83	-	XE61CC5845PR	Vdet-IC	5.8V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
F85	-	LN61FC5812P	Vdet-IC	5.8V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
F85	-	XC61FC5812P	Vdet-IC	5.8V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
F86	-	LN61FC5842P	Vdet-IC	5.8V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
F86	-	XC61FC5842P	Vdet-IC	5.8V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
F87	-	LN61FC5852P	Vdet-IC	5.8V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
F87	-	XC61FC5852P	Vdet-IC	5.8V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
F9	-	ELM9819AB	LVR-IC	1.9V±2%, 200mA	SOT-89	20vl	VR1	4a	Elm
F9	-	TC54VC5901MB	Vdet-IC	5.9V±2%, -Reset PPO	SOT-89	20vda	VD6	4v	Mcc
F93	-	XC61CC5902P	Vdet-IC	5.9V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
F93	-	XE61CC5945PR	Vdet-IC	5.9V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
F95	-	LN61FC5912P	Vdet-IC	5.9V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
F95	-	XC61FC5912P	Vdet-IC	5.9V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
F96	-	LN61FC5942P	Vdet-IC	5.9V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
F96	-	XC61FC5942P	Vdet-IC	5.9V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
F97	-	LN61FC5952P	Vdet-IC	5.9V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
F97	-	XC61FC5952P	Vdet-IC	5.9V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
FA	-	2SC5564	Si-npn	Lo-sat, 15V, 6A, 1.3W, B=200..560, 380MHz, 30/110ns	SOT-89	20tb	-	4a	San
FA	-	BFQ17	Si-npn	RF, 40V, 150mA, 1W, B=25..80, 1.5GHz	SOT-89	20tb	-	4g	Phi
FB	-	2SC5565	Si-npn	Lo-sat, 40V, 5A, 1.3W, B=200..560, 420MHz, 30/270ns	SOT-89	20tb	-	4a	San
FB	-	BFQ19	Si-npn	RF, 20V, 100mA, 1W, B=25..80, 5.5GHz	SOT-89	20tb	-	4g	Phi
FC	-	2SC3438-C	Si-npn	AF-Drv, 100V, 500mA, 500mW, B=55..110, 130MHz	SOT-89	20tb	-	4a	Mit
FC	-	2SC5566	Si-npn	Lo-sat, 80V, 4A, 1.3W, B=200..560, 400MHz, 30/230ns	SOT-89	20tb	-	4a	San
FC	-	BFQ64	Si-npn	UHF-A, 30V, 200mA, 3GHz	SOT-89	20tb	-	4b	Sie
FD	-	2SC3438-D	Si-npn	AF-Drv, 100V, 500mA, 500mW, B=90..180, 130MHz	SOT-89	20tb	-	4a	Mit
FD	-	2SC5567	Si-npn	Relay-Drv, 15V, 9A, 1.3W, B=200..560, 280MHz	SOT-89	20tb	-	4a	San
FD	-	BFQ17	Si-npn	RF, 25V, 150mA, 1W, B>25, 1.2GHz	SOT-89	20tb	-	4g	Sie
FD-	-	RT9261B-28PX	DC-DC-IC	VFM step-up, 2.8V±2%, 50mA	SOT-89	20bq	DC2	4b	Rct
FD=	-	RT9261B-28GX	DC-DC-IC	VFM step-up, 2.8V±2%, 50mA	SOT-89	20bq	DC2	4b	Rct
FE	-	2SC3438-E	Si-npn	AF-Drv, 100V, 500mA, 500mW, B=150..300, 130MHz	SOT-89	20tb	-	4a	Mit
FE	-	2SC5568	Si-npn	Lo-sat, 40V, 8A, 1.3W, B=200..560, 320MHz, 30/190ns	SOT-89	20tb	-	4a	San
FEs	-	BFQ19P	Si-npn	RF, 40V, 100mA, 1W, B=25..70, 5.5GHz	SOT-89	20tb	-	4g	Sie
FF	-	2SC5569	Si-npn	Lo-sat, 80V, 7A, 1.3W, B=200..560, 330MHz, 30/225ns	SOT-89	20tb	-	4a	San
FF	-	BFQ18A	Si-npn	RF, 25V, 150mA, 1W, B>25, 4GHz	SOT-89	20tb	-	4g	Phi
FF	-	ELM99151B	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
FF-	-	RT9261B-30PX	DC-DC-IC	VFM step-up, 3.0V±2%, 50mA	SOT-89	20bq	DC2	4b	Rct
FG	-	BFQ149	Si-npn	RF, 20V, 150mA, 1W, B=20..50, 5GHz	SOT-89	20tb	-	4g	Phi
FG	-	ELM99161B	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
FG11G	-	AIC1747-11GX3A	LVR-IC	LDO, 1.1V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG11P	-	AIC1747-11PX3A	LVR-IC	LDO, 1.1V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG12G	-	AIC1747-12GX3A	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG12P	-	AIC1747-12PX3A	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG13G	-	AIC1747-13GX3A	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG13P	-	AIC1747-13PX3A	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG15G	-	AIC1747-15GX3A	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG15P	-	AIC1747-15PX3A	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG18G	-	AIC1747-18GX3A	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG18P	-	AIC1747-18PX3A	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG20G	-	AIC1747-20GX3A	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG20P	-	AIC1747-20PX3A	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG25G	-	AIC1747-25GX3A	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG25P	-	AIC1747-25PX3A	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG27G	-	AIC1747-27GX3A	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG27P	-	AIC1747-27PX3A	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FG2JG	-	AIC1747-285GX3A	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG2JP	-	AIC1747-285PX3A	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG30G	-	AIC1747-30GX3A	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG30P	-	AIC1747-30PX3A	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG33G	-	AIC1747-33GX3A	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG33P	-	AIC1747-33PX3A	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG35G	-	AIC1747-35GX3A	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG35P	-	AIC1747-35PX3A	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG37G	-	AIC1747-37GX3A	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG37P	-	AIC1747-37PX3A	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG38G	-	AIC1747-38GX3A	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FG38P	-	AIC1747-38PX3A	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20vl	VR1	4g	Aic
FGs	-	BFQ19S	Si-npn	RF, LN, 40V, 75mA, 1W, B=40..200, 5.5GHz	SOT-89	20tr	-	4b	Sie
FH	-	ELM99171B	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
FH11G	-	AIC1747-11GX3T	LVR-IC	LDO, 1.1V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH11P	-	AIC1747-11PX3T	LVR-IC	LDO, 1.1V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH12G	-	AIC1747-12GX3T	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH12P	-	AIC1747-12PX3T	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH13G	-	AIC1747-13GX3T	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH13P	-	AIC1747-13PX3T	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH15G	-	AIC1747-15GX3T	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH15P	-	AIC1747-15PX3T	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH18G	-	AIC1747-18GX3T	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH18P	-	AIC1747-18PX3T	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH20G	-	AIC1747-20GX3T	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH20P	-	AIC1747-20PX3T	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH25G	-	AIC1747-25GX3T	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH25P	-	AIC1747-25PX3T	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH27G	-	AIC1747-27GX3T	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH27P	-	AIC1747-27PX3T	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH2JG	-	AIC1747-285GX3T	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH2JP	-	AIC1747-285PX3T	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH30G	-	AIC1747-30GX3T	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH30P	-	AIC1747-30PX3T	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH33G	-	AIC1747-33GX3T	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH33P	-	AIC1747-33PX3T	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH35G	-	AIC1747-35GX3T	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH35P	-	AIC1747-35PX3T	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH37G	-	AIC1747-37GX3T	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH37P	-	AIC1747-37PX3T	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH38G	-	AIC1747-38GX3T	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FH38P	-	AIC1747-38PX3T	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20ch	VR1	4g	Aic
FJ	-	ELM99181B	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
FJ-	-	RT9261B-33PX	DC-DC-IC	VFM step-up, 3.3V±2%, 50mA	SOT-89	20bq	DC2	4b	Rct
FK	-	2SB800-K	Si-pnp	AF-Amp, 80V, 300mA, 2W, 100MHz, B=200..400	SOT-89	20tb	-	4b	Nec
FK	-	ELM99191B	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-89	20vl	VR1	4a	Elm
FL	-	2SB800-L	Si-pnp	AF-Amp, 80V, 300mA, 2W, 100MHz, B=135..270	SOT-89	20tb	-	4b	Nec
FM	-	2SB800-M	Si-pnp	AF-Amp, 80V, 300mA, 2W, 100MHz, B=90..180	SOT-89	20tb	-	4b	Nec
FO	-	2SA1202-O	Si-pnp	AF-Amp, 80V, 400mA, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4b	Tos
FO	-	KTA1662-O	Si-pnp	GP, AF, 80V, 400mA, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4a	Kec
FP11G	-	AIC1746-11GX3A	LVR-IC	LDO, 1.1V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP11P	-	AIC1746-11PX3A	LVR-IC	LDO, 1.1V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP12G	-	AIC1746-12GX3A	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP12P	-	AIC1746-12PX3A	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP13G	-	AIC1746-13GX3A	LVR-IC	LDO, 1.3V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP13P	-	AIC1746-13PX3A	LVR-IC	LDO, 1.3V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP15G	-	AIC1746-15GX3A	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP15P	-	AIC1746-15PX3A	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP18G	-	AIC1746-18GX3A	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP18P	-	AIC1746-18PX3A	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP20G	-	AIC1746-20GX3A	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP20P	-	AIC1746-20PX3A	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP25G	-	AIC1746-25GX3A	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP25P	-	AIC1746-25PX3A	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP27G	-	AIC1746-27GX3A	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP27P	-	AIC1746-27PX3A	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP2JG	-	AIC1746-285GX3A	LVR-IC	LDO, 2.85V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP2JP	-	AIC1746-285PX3A	LVR-IC	LDO, 2.85V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP30G	-	AIC1746-30GX3A	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP30P	-	AIC1746-30PX3A	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FP33G	-	AIC1746-33GX3A	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP33P	-	AIC1746-33PX3A	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP35G	-	AIC1746-35GX3A	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP35P	-	AIC1746-35PX3A	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP37G	-	AIC1746-37GX3A	LVR-IC	LDO, 3.7V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP37P	-	AIC1746-37PX3A	LVR-IC	LDO, 3.7V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP38G	-	AIC1746-38GX3A	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FP38P	-	AIC1746-38PX3A	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-89	20vl	VR1	4g	Aic
FQ11G	-	AIC1746-11GX3T	LVR-IC	LDO, 1.1V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ11P	-	AIC1746-11PX3T	LVR-IC	LDO, 1.1V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ12G	-	AIC1746-12GX3T	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ12P	-	AIC1746-12PX3T	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ13G	-	AIC1746-13GX3T	LVR-IC	LDO, 1.3V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ13P	-	AIC1746-13PX3T	LVR-IC	LDO, 1.3V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ15G	-	AIC1746-15GX3T	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ15P	-	AIC1746-15PX3T	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ18G	-	AIC1746-18GX3T	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ18P	-	AIC1746-18PX3T	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ20G	-	AIC1746-20GX3T	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ20P	-	AIC1746-20PX3T	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ25G	-	AIC1746-25GX3T	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ25P	-	AIC1746-25PX3T	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ27G	-	AIC1746-27GX3T	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ27P	-	AIC1746-27PX3T	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ2JG	-	AIC1746-285GX3T	LVR-IC	LDO, 2.85V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ2JP	-	AIC1746-285PX3T	LVR-IC	LDO, 2.85V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ30G	-	AIC1746-30GX3T	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ30P	-	AIC1746-30PX3T	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ33G	-	AIC1746-33GX3T	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ33P	-	AIC1746-33PX3T	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ35G	-	AIC1746-35GX3T	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ35P	-	AIC1746-35PX3T	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ37G	-	AIC1746-37GX3T	LVR-IC	LDO, 3.7V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ37P	-	AIC1746-37PX3T	LVR-IC	LDO, 3.7V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ38G	-	AIC1746-38GX3T	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FQ38P	-	AIC1746-38PX3T	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-89	20ch	VR1	4g	Aic
FR	-	2SC4988	Si-npn	VHF/UHF, 15V, 100mA, 800mW, B=50..250, 8.5GHz	UPAK	20tb	-	4b	Ren
FS	-	2SB1519	Si-pnp	AF, 50V, 2A, 1W, B=40..120	SOT-89	20tb	-	4g	Ren
FT-	-	RT9261B-42PX	DC-DC-IC	VFM step-up, 4.2V±2%, 50mA	SOT-89	20bq	DC2	4b	Rct
FX	-	2SB1571-X	Si-pnp	Lo-sat, 50V, 5A, 2W, 150MHz, B=100..200	SOT-89	20tb	-	4b	Nec
FY	-	2SA1202-Y	Si-pnp	AF-Amp, 80V, 400mA, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4b	Tos
FY	-	2SB1571-Y	Si-pnp	Lo-sat, 50V, 5A, 2W, 150MHz, B=160..320	SOT-89	20tb	-	4b	Nec
FY	-	2SK1698	n-MOSFET	V-MOS, LogL, 100V, 0.3A,<4.5Ω(0.5A)	SOT-89	20fa	-	4b	Ren
FY	-	KTA1662-Y	Si-pnp	GP, AF, 80V, 400mA, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4a	Kec
FZ	-	2SB1571-Z	Si-pnp	Lo-sat, 50V, 5A, 2W, 150MHz, B=200..400	SOT-89	20tb	-	4b	Nec
G1	-	D70Y1.5T1	Si-npn	AF, 30V, 1.5A	SOT-89	20tb	-	4b	Gen
G1	-	RT9161A-16CX	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
G1	-	TFM3906	Si-npn	HV, 160V, 600mA, 600mW, B=50..390, 100MHz	SOT-89	20tb	-	4ga	Tfr
G1-	-	RT9161A-16PX	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
G1Q	-	TFM3906Q	Si-npn	HV, 160V, 600mA, 600mW, B=120..270, 100MHz	SOT-89	20tb	-	4ga	Tfr
G1R	-	TFM3906R	Si-npn	HV, 160V, 600mA, 600mW, B=180..390, 100MHz	SOT-89	20tb	-	4ga	Tfr
G3	-	RT9161A-18CX	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
G3-	-	RT9161A-18PX	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
G4	-	RT9808-21CX	Vdet-IC	2.1V±2%, -ODO +Reset	SOT-89	20vda	VD6	4g	Rct
G4-	-	RT9808-21PX	Vdet-IC	2.1V±2%, -ODO +Reset	SOT-89	20vda	VD6	4g	Rct
G5	-	RT9808-33CX	Vdet-IC	3.3V±2%, -ODO +Reset	SOT-89	20vda	VD6	4g	Rct
G5-	-	RT9808-33PX	Vdet-IC	3.3V±2%, -ODO +Reset	SOT-89	20vda	VD6	4g	Rct
G6	-	RT9808-23CX	Vdet-IC	2.3V±2%, -ODO +Reset	SOT-89	20vda	VD6	4g	Rct
G7	-	RT9808-30CX	Vdet-IC	3.0V±2%, -ODO +Reset	SOT-89	20vda	VD6	4g	Rct
G70A	-	AZ7023RTR-G1	Vdet-IC	2.3V±1.5%, -Reset OCO	SOT-89	20vdd	VD6	4g	Bcd
G70B	-	AZ7027RTR-G1	Vdet-IC	2.7V±1.5%, -Reset OCO	SOT-89	20vdd	VD6	4g	Bcd
G70C	-	AZ7029RTR-G1	Vdet-IC	2.9V±1.5%, -Reset OCO	SOT-89	20vdd	VD6	4g	Bcd
G70D	-	AZ7033RTR-G1	Vdet-IC	3.3V±1.5%, -Reset OCO	SOT-89	20vdd	VD6	4g	Bcd
G70E	-	AZ7042RTR-G1	Vdet-IC	4.2V±1.5%, -Reset OCO	SOT-89	20vdd	VD6	4g	Bcd
G70F	-	AZ7045RTR-G1	Vdet-IC	4.5V±1.5%, -Reset OCO	SOT-89	20vdd	VD6	4g	Bcd
G70G	-	AZ7025RTR-G1	Vdet-IC	2.5V±1.5%, -Reset OCO	SOT-89	20vdd	VD6	4g	Bcd
G70H	-	AZ7031RTR-G1	Vdet-IC	3.1V±1.5%, -Reset OCO	SOT-89	20vdd	VD6	4g	Bcd
G8	-	RT9808-42CX	Vdet-IC	4.2V±2%, -ODO +Reset	SOT-89	20vda	VD6	4g	Rct
G8-	-	RT9808-42PX	Vdet-IC	4.2V±2%, -ODO +Reset	SOT-89	20vda	VD6	4g	Rct
G9	-	RT9161A-35CX	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G9-	-	RT9161A-35PX	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GA	-	2SD1463-A	Si-npn	GP, 120V, 50mA, 1W, B=60..120, 140MHz	SOT-89	20tb	-	4b	Ren
GA	-	BAW78A	Si-diode	Sw, 50V, 1A, <1000ns	SOT-89	20di	-	4b	Sie
GA	-	RT9161A-25CX	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GA-	-	RT9161A-25PX	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GA08G	-	AIC1748-08GX3A	LVR-IC	LDO, 0.8V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA09G	-	AIC1748-09GX3A	LVR-IC	LDO, 0.9V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA1	-	2SA1871-1	Si-pnp	HF, HV, 600V, 1A, 2W, 30MHz, B=30..60	SOT-89	20tb	-	4b	Nec
GA10G	-	AIC1748-10GX3A	LVR-IC	LDO, 1.0V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA11G	-	AIC1748-11GX3A	LVR-IC	LDO, 1.1V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA12G	-	AIC1748-12GX3A	LVR-IC	LDO, 1.2V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA13G	-	AIC1748-13GX3A	LVR-IC	LDO, 1.3V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA14G	-	AIC1748-14GX3A	LVR-IC	LDO, 1.4V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA15G	-	AIC1748-15GX3A	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA16G	-	AIC1748-16GX3A	LVR-IC	LDO, 1.6V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA17G	-	AIC1748-17GX3A	LVR-IC	LDO, 1.7V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA18G	-	AIC1748-18GX3A	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA19G	-	AIC1748-19GX3A	LVR-IC	LDO, 1.9V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA2	-	2SA1871-2	Si-pnp	HF, HV, 600V, 1A, 2W, 30MHz, B=40..80	SOT-89	20tb	-	4a	Nec
GA20G	-	AIC1748-20GX3A	LVR-IC	LDO, 2.0V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA21G	-	AIC1748-21GX3A	LVR-IC	LDO, 2.1V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA22G	-	AIC1748-22GX3A	LVR-IC	LDO, 2.2V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA23G	-	AIC1748-23GX3A	LVR-IC	LDO, 2.3V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA24G	-	AIC1748-24GX3A	LVR-IC	LDO, 2.4V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA25G	-	AIC1748-25GX3A	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA26G	-	AIC1748-26GX3A	LVR-IC	LDO, 2.6V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA27G	-	AIC1748-27GX3A	LVR-IC	LDO, 2.7V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA28G	-	AIC1748-28GX3A	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA29G	-	AIC1748-29GX3A	LVR-IC	LDO, 2.9V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA2JG	-	AIC1748-285GX3A	LVR-IC	LDO, 2.85V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA3	-	2SA1871-3	Si-pnp	HF, HV, 600V, 1A, 2W, 30MHz, B=60..120	SOT-89	20tb	-	4a	Nec
GA30G	-	AIC1748-30GX3A	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA31G	-	AIC1748-31GX3A	LVR-IC	LDO, 3.1V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA32G	-	AIC1748-32GX3A	LVR-IC	LDO, 3.2V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GA33G	-	AIC1748-33GX3A	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-89	20vl	VR1	4g	Aic
GB	-	2SD1463-B	Si-npn	GP, 120V, 50mA, 1W, B=100..200, 140MHz	SOT-89	20tb	-	4b	Ren
GB	-	BAW78B	Si-diode	Sw, 100V, 1A, <1000ns	SOT-89	20di	-	4b	Sie
GB	-	RT9161A-39CX	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GB1	-	2SB1578-1	Si-pnp	AF-Amp, Sw, 60V, 5A, 2W, 600/600ns, B=100..200	SOT-89	20tb	-	4b	Nec
GB2	-	2SB1578-2	Si-pnp	AF-Amp, Sw, 60V, 5A, 2W, 600/600ns, B=160..320	SOT-89	20tb	-	4b	Nec
GB3	-	2SB1578-3	Si-pnp	AF-Amp, Sw, 60V, 5A, 2W, 600/600ns, B=200..400	SOT-89	20tb	-	4b	Nec
GC	-	BAW78C	Si-diode	Sw, 200V, 1A, <1000ns	SOT-89	20di	-	4b	Sie
GD	-	BAW78D	Si-diode	Sw, 400V, 1A, <1000ns	SOT-89	20di	-	4b	Sie
GD	-	RT9161A-28CX	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GD=	-	RT9161A-28GX	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GE	-	BAW79A	Si-diode	Dual, Sw, 2x50V, 1A, <1000ns	SOT-89	20dj	-	4b	Sie
GE	-	RT9161A-21CX	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GF	-	BAW79B	Si-diode	Dual, Sw, 2x100V, 1A, <1000ns	SOT-89	20dj	-	4b	Sie
GF	-	RT9161A-15CX	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GF-	-	RT9161A-15PX	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GG	-	2SA1369-G	Si-pnp	AF-Drv, 30V, 1.5A, 500mW, B=400..800, 90MHz	SOT-89	20tb	-	4b	Mit
GG	-	BAW79C	Si-diode	Dual, Sw, 2x200V, 1A, <1000ns	SOT-89	20dj	-	4b	Sie
GG	-	RT9161A-45CX	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GG-	-	RT9161A-45PX	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GH	-	2SA1369-H	Si-pnp	AF-Drv, 30V, 1.5A, 500mW, B=600..1200, 90MHz	SOT-89	20tb	-	4b	Mit
GH	-	BAW79D	Si-diode	Dual, Sw, 2x400V, 1A, <1000ns	SOT-89	20dj	-	4b	Sie
GH	-	RT9161A-30CX	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GH-	-	RT9161A-30PX	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GJ	-	RT9161A-33CX	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GJ-	-	RT9161A-33PX	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GK	-	2SD1615-K	Si-npn	AF-Amp, Sw, 60V, 1A, 2W, 160MHz, B=300..600	SOT-89	20tb	-	4b	Nec
GK	-	RT9808-27CX	Vdet-IC	2.7V±2%, -ODO +Reset	SOT-89	20vda	VD6	4g	Rct
GL	-	2SD1615-L	Si-npn	AF-Amp, Sw, 60V, 1A, 2W, 160MHz, B=200..400	SOT-89	20tb	-	4b	Nec
GL	-	RT9808-36CX	Vdet-IC	3.6V±2%, -ODO +Reset	SOT-89	20vda	VD6	4g	Rct
GM	-	2SD1615-M	Si-npn	AF-Amp, Sw, 60V, 1A, 2W, 160MHz, B=135..270	SOT-89	20tb	-	4b	Nec
GM	-	RT9161A-36CX	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GN-	-	RT9166A-13PX	LVR-IC	LDO, 1.3V±2%, 600mA	SOT-89	20ch	VR1	4c	Rct
GO	-	2SC2883-O	Si-npn	GP, 30V, 1.5A, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4b	Tos
GO	-	AP130-15YR	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
GO	-	KTC4375-O	Si-npn	AF-Drv, 30V, 1.5A, 500mW, B=100..200, >120MHz	SOT-89	20tb	-	4a	Kec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GP	-	2SD1615A-P	Si-npn	AF-Amp, Sw, 120V, 1A, 2W, 160MHz, B=200..400	SOT-89	20tb	-	4b	Nec
GP	-	AP130-16YR	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
GP-	-	RT9161A-40PX	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
GQ	-	2SD1615A-Q	Si-npn	AF-Amp, Sw, 120V, 1A, 2W, 160MHz, B=135..270	SOT-89	20tb	-	4b	Nec
GQ	-	AP130-17YR	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
GQ-	-	RT9808-39PX	Vdet-IC	3.9V±2%, -ODO +Reset	SOT-89	20vda	VD6	4g	Rct
GR	-	AP130-18YR	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
GS	-	2SB1520	Si-pnp	AF, 80V, 2A, 1W, B=40..120	SOT-89	20tb	-	4g	Ren
GS	-	AP130-19YR	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
GT	-	2SD2423	Si-npn-Darl+Di	Sw, 50V, 1.5A, B>2000, Z-Di (B->C)	SOT-89	20tb	-	4b	Ren
GT	-	AP130-20YR	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
GU	-	AP130-21YR	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
GV	-	AP130-22YR	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
GW	-	AP130-23YR	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
GX	-	2SD2403-X	Si-npn	AF, Sw, 80V, 3A, 2W, 130MHz, B=100..200	SOT-89	20tb	-	4b	Nec
GX	-	AP130-24YR	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
GY	-	2SC2883-Y	Si-npn	GP, 30V, 1.5A, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4b	Tos
GY	-	2SD2403-Y	Si-npn	AF, Sw, 80V, 3A, 2W, 130MHz, B=160..320	SOT-89	20tb	-	4b	Nec
GY	-	AP130-25YR	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
GY	-	KTC4375-Y	Si-npn	AF-Drv, 30V, 1.5A, 500mW, B=160..320, >120MHz	SOT-89	20tb	-	4a	Kec
GZ	-	2SD2403-Z	Si-npn	AF, Sw, 80V, 3A, 2W, 130MHz, B=100..200	SOT-89	20tb	-	4b	Nec
GZ	-	AP130-26YR	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
H0	-	AP130-27YR	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
H0	-	RT9818C-21CX	Vdet-IC	2.1V±1.5%, -Reset ODO, Td=220ms	SOT-89	20vda	VD6	4g	Rct
H0	-	TC54VC6002MB	Vdet-IC	6.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4v	Mcc
H03	-	XC61CC6002P	Vdet-IC	6.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4c	Tor
H03	-	XE61CC6045PR	Vdet-IC	6.0V±2%, -Reset PPO	SOT-89	20cj	VD7	4j	Tor
H05	-	LN61FC6012P	Vdet-IC	6.0V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4h	Nln
H05	-	XC61FC6012P	Vdet-IC	6.0V±2%, +Reset PPO, 200ms	SOT-89	20vda	VD7	4c	Tor
H06	-	LN61FC6042P	Vdet-IC	6.0V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4h	Nln
H06	-	XC61FC6042P	Vdet-IC	6.0V±2%, +Reset PPO, 400ms	SOT-89	20vda	VD7	4c	Tor
H07	-	LN61FC6052P	Vdet-IC	6.0V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4h	Nln
H07	-	XC61FC6052P	Vdet-IC	6.0V±2%, +Reset PPO, 50ms	SOT-89	20vda	VD7	4c	Tor
H1	-	AP130-28YR	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
H1	-	D71Y1.5T1	Si-pnp	AF, 30V, 1.5A	SOT-89	20tb	-	4b	Gen
H1	-	RT9818C-33CX	Vdet-IC	3.3V±1.5%, -Reset ODO, Td=220ms	SOT-89	20vda	VD6	4g	Rct
H2	-	AP130-29YR	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
H2	-	RT9818C-42CX	Vdet-IC	4.2V±1.5%, -Reset ODO, Td=220ms	SOT-89	20vda	VD6	4g	Rct
H2-	-	RT9818C-42PX	Vdet-IC	4.2V±1.5%, -Reset ODO, Td=220ms	SOT-89	20vda	VD6	4g	Rct
H20	ji	XC6383A201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H21	ji	XC6383A211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H22	ji	XC6383A221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H23	ji	XC6383A231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H24	ji	XC6383A241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H25	ji	XC6383A251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H26	ji	XC6383A261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H27	ji	XC6383A271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H28	ji	XC6383A281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H29	ji	XC6383A291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H3	-	AP130-30YR	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
H30	ji	XC6383A301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H31	ji	XC6383A311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H32	ji	XC6383A321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H33	ji	XC6383A331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H34	ji	XC6383A341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H35	ji	XC6383A351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H36	ji	XC6383A361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H37	ji	XC6383A371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H38	ji	XC6383A381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H39	ji	XC6383A391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H4	-	AP130-31YR	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
H40	ji	XC6383A401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H41	ji	XC6383A411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H42	ji	XC6383A421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H43	ji	XC6383A431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H44	ji	XC6383A441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H45	ji	XC6383A451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H46	ji	XC6383A461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H47	ji	XC6383A471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H48	ji	XC6383A481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H49	ji	XC6383A491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H5	-	AP130-32YR	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
H50	-	LN1131P311PR	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H50	ji	XC6383A501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H51	ji	XC6383A511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H52	ji	XC6383A521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H53	ji	XC6383A531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H54	ji	XC6383A541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H55	ji	XC6383A551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H56	ji	XC6383A561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H57	ji	XC6383A571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H58	ji	XC6383A581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H59	ji	XC6383A591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H5B	-	LN1131P122PR	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5C	-	LN1131P132PR	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5D	-	LN1131P142PR	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5E	-	LN1131P152PR	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5F	-	LN1131P162PR	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5H	-	LN1131P172PR	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5K	-	LN1131P182PR	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5L	-	LN1131P192PR	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5M	-	LN1131P202PR	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5N	-	LN1131P212PR	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5P	-	LN1131P222PR	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5R	-	LN1131P232PR	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5S	-	LN1131P242PR	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5T	-	LN1131P252PR	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5U	-	LN1131P262PR	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5V	-	LN1131P272PR	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5X	-	LN1131P282PR	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5Y	-	LN1131P292PR	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H5Z	-	LN1131P302PR	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H60	ji	XC6383A601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H61	-	LN1131P322PR	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H61	ji	XC6383A611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H62	-	LN1131P332PR	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H62	ji	XC6383A621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H63	-	LN1131P342PR	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H63	ji	XC6383A631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H64	-	LN1131P352PR	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H64	ji	XC6383A641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H65	-	LN1131P362PR	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H65	ji	XC6383A651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H66	-	LN1131P372PR	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H66	ji	XC6383A661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H67	-	LN1131P382PR	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H67	ji	XC6383A671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H68	-	LN1131P392PR	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H68	ji	XC6383A681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H69	-	LN1131P402PR	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H69	ji	XC6383A691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H6A	-	LN1131P412PR	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6B	-	LN1131P422PR	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6C	-	LN1131P432PR	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6D	-	LN1131P442PR	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6E	-	LN1131P452PR	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6G	-	LN1131P462PR	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6H	-	LN1131P472PR	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6K	-	LN1131P482PR	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6L	-	LN1131P492PR	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6M	-	LN1131P502PR	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6N	-	LN1131P512PR	LVR-IC	LDO, 5.1V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6P	-	LN1131P522PR	LVR-IC	LDO, 5.2V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6R	-	LN1131P532PR	LVR-IC	LDO, 5.3V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6S	-	LN1131P542PR	LVR-IC	LDO, 5.4V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6T	-	LN1131P552PR	LVR-IC	LDO, 5.5V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6U	-	LN1131P562PR	LVR-IC	LDO, 5.6V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6V	-	LN1131P572PR	LVR-IC	LDO, 5.7V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6X	-	LN1131P582PR	LVR-IC	LDO, 5.8V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H6Y	-	LN1131P592PR	LVR-IC	LDO, 5.9V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H6Z	-	LN1131P602PR	LVR-IC	LDO, 6.0V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
H70	ji	XC6383A701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz	SOT-89	20bq	DC2	4h	Tor
H9	-	AP130-33YR	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HA	-	2SD1464-A	Si-npn	GP, 180V, 50mA, 1W, B=60..120, 140MHz	SOT-89	20tb	-	4b	Ren
HA	-	AP130-34YR	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HA	-	BU4809FP3	Vdet-IC	0.9V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HB	-	2SD1464-B	Si-npn	GP, 180V, 50mA, 1W, B=100..200, 140MHz	SOT-89	20tb	-	4b	Ren
HB	-	AP130-35YR	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HB	-	BU4810FP3	Vdet-IC	1.0V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HC	-	AP130-36YR	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HC	-	BU4811FP3	Vdet-IC	1.1V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HD	-	AP130-37YR	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HD	-	BU4812FP3	Vdet-IC	1.2V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HE	-	AP130-38YR	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HE	-	BU4813FP3	Vdet-IC	1.3V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HF	-	AP130-39YR	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HF	-	BU4814FP3	Vdet-IC	1.4V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HG	-	2SC3439-G	Si-npn	Motor-Drv, 30V, 1.5A, 500mW, B=400..800, 90MHz	SOT-89	20tb	-	4a	Mit
HG	-	AP130-40YR	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HG	-	BU4815FP3	Vdet-IC	1.5V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HH	-	2SC3439-H	Si-npn	Motor-Drv, 30V, 1.5A, 500mW, B=600..1200, 90MHz	SOT-89	20tb	-	4a	Mit
HH	-	AP130-41YR	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HH	-	BU4816FP3	Vdet-IC	1.6V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HI	-	AP130-42YR	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HJ	-	2SC3439-J	Si-npn	Motor-Drv, 30V, 1.5A, 500mW, B=800..1600, 90MHz	SOT-89	20tb	-	4a	Mit
HJ	-	AP130-43YR	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HJ	-	BU4817FP3	Vdet-IC	1.7V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HK	-	2SD1006-K	Si-npn	AF-Amp, 100V, 500mA, 2W, 90MHz, B=200..400	SOT-89	20tb	-	4a	Nec
HK	-	AP130-44YR	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HK	-	BU4818FP3	Vdet-IC	1.8V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HL	-	2SD1006-L	Si-npn	AF-Amp, 100V, 500mA, 2W, 90MHz, B=135..270	SOT-89	20tb	-	4a	Nec
HL	-	AP130-45YR	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HL	-	BU4819FP3	Vdet-IC	1.9V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HM	-	2SD1006-M	Si-npn	AF-Amp, 100V, 500mA, 2W, 90MHz, B=90..180	SOT-89	20tb	-	4a	Nec
HM	-	AP130-46YR	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HM	-	BU4820FP3	Vdet-IC	2.0V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HM	-	MCP1703T-1202E/MB	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-89	20vl	VR1	4ra	Mcc
HN	-	AP130-47YR	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HN	-	BU4821FP3	Vdet-IC	2.1V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HO	-	2SA1203-O	Si-pnp	GP, 30V, 1.5A, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4b	Tos
HO	-	AP130-48YR	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HO	-	KTA1663-O	Si-pnp	AF-Drv, 30V, 1.5A, 500mW, B=100..200, >120MHz	SOT-89	20tb	-	4a	Kec
HP	-	2SD1007-P	Si-npn	AF-Amp, 120V, 500mA, 2W, 90MHz, B=200..400	SOT-89	20tb	-	4a	Nec
HP	-	AP130-49YR	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HP	-	BU4822FP3	Vdet-IC	2.2V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HP	-	MCP1703T-1502E/MB	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-89	20vl	VR1	4ra	Mcc
HQ	-	2SD1007-Q	Si-npn	AF-Amp, 120V, 500mA, 2W, 90MHz, B=135..270	SOT-89	20tb	-	4a	Nec
HQ	-	AP130-50YR	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-89	20vl	VR1	4b	Ana
HQ	-	BU4823FP3	Vdet-IC	2.3V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HQ	-	MCP1703T-1802E/MB	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-89	20vl	VR1	4ra	Mcc
HR	-	2SB956-R	Si-pnp	GP, AF, 20V, 1A, 1W, B=130..210, 200MHz	SOT-89	20tb	-	4b	Pan
HR	-	2SD1007-R	Si-npn	AF-Amp, 120V, 500mA, 2W, 90MHz, B=90..180	SOT-89	20tb	-	4a	Nec
HR	-	BU4824FP3	Vdet-IC	2.4V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HR	-	MCP1703T-2502E/MB	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-89	20vl	VR1	4ra	Mcc
HS	-	2SB956-S	Si-pnp	GP, AF, 20V, 1A, 1W, B=180..280, 200MHz	SOT-89	20tb	-	4b	Pan
HS	-	2SD2540	Si-npn	Lo-sat, 40V, 5A, 1W, B=250..600, 190MHz	SOT-89	20tb	-	4b	Ren
HS	-	BU4825FP3	Vdet-IC	2.5V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HS	-	MCP1703T-2802E/MB	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-89	20vl	VR1	4ra	Mcc
HT	-	BU4826FP3	Vdet-IC	2.6V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HT	-	MCP1703T-3002E/MB	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-89	20vl	VR1	4ra	Mcc
HU	-	BU4827FP3	Vdet-IC	2.7V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HU	-	MCP1703T-3302E/MB	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-89	20vl	VR1	4ra	Mcc
HV	-	BU4828FP3	Vdet-IC	2.8V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HV	-	MCP1703T-4002E/MB	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-89	20vl	VR1	4ra	Mcc
HW	-	BU4829FP3	Vdet-IC	2.9V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HW	-	MCP1703T-5002E/MB	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-89	20vl	VR1	4ra	Mcc
HX	-	2SB1572-X	Si-pnp	Lo-sat, 80V, 3A, 2W, 160MHz, B=100..200	SOT-89	20tb	-	4b	Nec
HX	-	2SK2922	n-MOSFET	V-MOS, 10V, 0.7A, Pq>31dBm(836.5MHz)	SOT-89	20fa	-	4b	Ren
HX	-	BU4830FP3	Vdet-IC	3.0V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HY	-	2SA1203-Y	Si-pnp	GP, 30V, 1.5A, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4b	Tos



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HY	-	2SB1572-Y	Si-pnp	Lo-sat, 80V, 3A, 2W, 160MHz, B=160..320	SOT-89	20tb	-	4b	Nec
HY	-	2SK1772	n-MOSFET	V-MOS, LogL, 30V, 1A, <0.6Ω(0.5A)	SOT-89	20fa	-	4b	Ren
HY	-	BU4831FP3	Vdet-IC	3.1V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
HY	-	KTA1663-Y	Si-pnp	AF-Drv, 30V, 1.5A, 500mW, B=160..320, >120MHz	SOT-89	20tb	-	4a	Kec
HZ	-	2SB1572-Z	Si-pnp	Lo-sat, 80V, 3A, 2W, 160MHz, B=200..400	SOT-89	20tb	-	4b	Nec
HZ	-	BU4832FP3	Vdet-IC	3.2V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
IC	-	UN7231	Si-npn-Digi	Sw, 20V, 700mA, 1W, 55MHz, R1/R2=1k/47k	SOT-89	20tb	-	4b	Pan
IC	-	UNR7231	Si-npn-Digi	Sw, 20V, 700mA, 1W, 55MHz, R1/R2=1k/47k	SOT-89	20tb	-	4b	Pan
IK	-	2SA1463-K	Si-pnp	Sw, 60V, 1A, 2W, B=60..120, >300MHz	SOT-89	20tb	-	4b	Nec
IKR	-	2SD2210-R	Si-npn	LV, DC-DC conv, 25V, 500mA, 1W, 200MHz, B=200..350	SOT-89	20tb	-	4b	Pan
IKS	-	2SD2210-S	Si-npn	LV, DC-DC conv, 25V, 500mA, 1W, 200MHz, B=300..500	SOT-89	20tb	-	4b	Pan
IKT	-	2SD2210-T	Si-npn	LV, DC-DC conv, 25V, 500mA, 1W, 200MHz, B=400..800	SOT-89	20tb	-	4b	Pan
IL	-	2SA1463-L	Si-pnp	Sw, 60V, 1A, 2W, B=100..200, >300MHz	SOT-89	20tb	-	4b	Nec
IL7	-	ZXTP25100CZ	Si-pnp	Sw, HV, Drv, 115V, 1A, 1.8W, B=200..500, 180MHz	SOT-89	20tb	-	4i	Zx
IO	-	2SC3515-O	Si-npn	Drv, 300V, 100mA, 500mW, B=50..150, 80MHz	SOT-89	20tm	-	4f	Tos
IQ	-	2SB1073-Q	Si-pnp	AF, Lo-sat, 30V, 4A, 1W, B=120..205, 120MHz	SOT-89	20tb	-	4b	Pan
IR	-	2SB1073-R	Si-pnp	AF, Lo-sat, 30V, 4A, 1W, B=180..315, 120MHz	SOT-89	20tb	-	4b	Pan
IR	-	2SC3515-R	Si-npn	Drv, 300V, 100mA, 500mW, B=30..90, 80MHz	SOT-89	20tm	-	4f	Tos
IU	-	2SB1589	Si-pnp	AF-Drv, 10V, 1.5A, 1W, B=200..700, 190MHz	SOT-89	20tb	-	4b	Pan
J=	-	RT9161A-33GX	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20vl	VR1	4c	Rct
J0	-	RT9166-25CX	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
J1	-	RT9166-33CX	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
J1-	-	RT9166-33PX	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
J2	-	RT9166-35CX	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
J2-	-	RT9166-35PX	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
J3	-	RT9166A-25CX	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-89	20ch	VR1	4c	Rct
J3-	-	RT9166A-25PX	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-89	20ch	VR1	4c	Rct
J4	-	RT9166A-33CX	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-89	20ch	VR1	4c	Rct
J4-	-	RT9166A-33PX	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-89	20ch	VR1	4c	Rct
J5	-	RT9166A-12CX	LVR-IC	LDO, 1.2V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
J5-	-	RT9166A-12PX	LVR-IC	LDO, 1.2V±2%, 600mA	SOT-89	20ch	VR1	4c	Rct
J6	-	RT9166A-18CX	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-89	20ch	VR1	4c	Rct
J6-	-	RT9166A-18PX	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-89	20ch	VR1	4c	Rct
J7-	-	RT9166A-45PX	LVR-IC	LDO, 4.5V±2%, 600mA	SOT-89	20ch	VR1	4c	Rct
J8	-	RT9166A-35CXL	LVR-IC	LDO, 3.5V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
J8-	-	RT9166A-35PXL	LVR-IC	LDO, 3.5V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
J9	-	RT9166-33CXL	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JA	-	2SJ187	p-MOSFET	Sw, U-Speed, LogL, 30V, 1A, 1.5W, <0.75Ω(0.5A), 10/70ns	PCP	20fi	-	4a	San
JA	-	BU4833FP3	Vdet-IC	3.3V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
JA	-	RT9166-12CXL	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JA-	-	RT9166-12PXL	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JA12	-	BL8591CC3TR12	LVR-IC	LDO, 1.2V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA12	-	LC1458CC3TR12	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA13	-	BL8591CC3TR13	LVR-IC	LDO, 1.3V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA13	-	LC1458CC3TR13	LVR-IC	LDO, 1.3V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA14	-	BL8591CC3TR14	LVR-IC	LDO, 1.4V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA14	-	LC1458CC3TR14	LVR-IC	LDO, 1.4V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA15	-	BL8591CC3TR15	LVR-IC	LDO, 1.5V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA15	-	LC1458CC3TR15	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA16	-	BL8591CC3TR16	LVR-IC	LDO, 1.6V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA16	-	LC1458CC3TR16	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA17	-	BL8591CC3TR17	LVR-IC	LDO, 1.7V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA17	-	LC1458CC3TR17	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA18	-	BL8591CC3TR18	LVR-IC	LDO, 1.8V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA18	-	LC1458CC3TR18	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA19	-	BL8591CC3TR19	LVR-IC	LDO, 1.9V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA19	-	LC1458CC3TR19	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA20	-	BL8591CC3TR20	LVR-IC	LDO, 2.0V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA20	-	LC1458CC3TR20	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA21	-	BL8591CC3TR21	LVR-IC	LDO, 2.1V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA21	-	LC1458CC3TR21	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA22	-	BL8591CC3TR22	LVR-IC	LDO, 2.2V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA22	-	LC1458CC3TR22	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA23	-	BL8591CC3TR23	LVR-IC	LDO, 2.3V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA23	-	LC1458CC3TR23	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA24	-	BL8591CC3TR24	LVR-IC	LDO, 2.4V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA24	-	LC1458CC3TR24	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA25	-	BL8591CC3TR25	LVR-IC	LDO, 2.5V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA25	-	LC1458CC3TR25	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA26	-	BL8591CC3TR26	LVR-IC	LDO, 2.6V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JA26	-	LC1458CC3TR26	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA27	-	BL8591CC3TR27	LVR-IC	LDO, 2.7V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA27	-	LC1458CC3TR27	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA28	-	BL8591CC3TR28	LVR-IC	LDO, 2.8V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA28	-	LC1458CC3TR28	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA29	-	BL8591CC3TR29	LVR-IC	LDO, 2.9V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA29	-	LC1458CC3TR29	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA30	-	BL8591CC3TR30	LVR-IC	LDO, 3.0V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA30	-	LC1458CC3TR30	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA31	-	BL8591CC3TR31	LVR-IC	LDO, 3.1V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA31	-	LC1458CC3TR31	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA32	-	BL8591CC3TR32	LVR-IC	LDO, 3.2V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA32	-	LC1458CC3TR32	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA33	-	BL8591CC3TR33	LVR-IC	LDO, 3.3V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA33	-	LC1458CC3TR33	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA34	-	BL8591CC3TR34	LVR-IC	LDO, 3.4V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA34	-	LC1458CC3TR34	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA35	-	BL8591CC3TR35	LVR-IC	LDO, 3.5V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA35	-	LC1458CC3TR35	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA36	-	BL8591CC3TR36	LVR-IC	LDO, 3.6V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA36	-	LC1458CC3TR36	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA37	-	BL8591CC3TR37	LVR-IC	LDO, 3.7V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA37	-	LC1458CC3TR37	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA38	-	BL8591CC3TR38	LVR-IC	LDO, 3.8V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA38	-	LC1458CC3TR38	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA39	-	BL8591CC3TR39	LVR-IC	LDO, 3.9V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA39	-	LC1458CC3TR39	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA40	-	BL8591CC3TR40	LVR-IC	LDO, 4.0V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA40	-	LC1458CC3TR40	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA41	-	BL8591CC3TR41	LVR-IC	LDO, 4.1V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA41	-	LC1458CC3TR41	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA42	-	BL8591CC3TR42	LVR-IC	LDO, 4.2V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA42	-	LC1458CC3TR42	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA43	-	BL8591CC3TR43	LVR-IC	LDO, 4.3V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA43	-	LC1458CC3TR43	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA44	-	BL8591CC3TR44	LVR-IC	LDO, 4.4V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA44	-	LC1458CC3TR44	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JA45	-	BL8591CC3TR45	LVR-IC	LDO, 4.5V±2%, 100mA	SOT-89	20vl	VR1	4bb	Shb
JA45	-	LC1458CC3TR45	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-89	20vl	VR1	4bb	Lch
JB	-	BU4834FP3	Vdet-IC	3.4V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
JB	-	RT9166-25CXL	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JB-	-	RT9166-25PXL	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JC	-	AP1115AY-28	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-89	20ch	VR1	4b	Ana
JC	-	AP1115BY-28	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-89	20vl	VR1	4b	Ana
JC	-	BU4835FP3	Vdet-IC	3.5V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
JC	-	RT9166-27CXL	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JC-	-	RT9166-27PXL	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JD	-	2SJ287	p-MOSFET	Sw, U-Speed, LogL, 30V, 500mA, 1.3W, <2.2Ω(0.25A), 7/35ns	PCP	20fi	-	4a	San
JD	-	BU4836FP3	Vdet-IC	3.6V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
JD	-	RT9166A-25CXL	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
JD-	-	RT9166A-25PXL	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
JD=	-	RT9166A-25GXL	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
JE	-	2SJ288	p-MOSFET	Sw, U-Speed, LogL, 60V, 500mA, 1.3W, <3Ω(0.25A), 7/35ns	PCP	20fi	-	4a	San
JE	-	AP1116Y	LVR-IC	LDO, Adjustable 1.25..13.8V, 500mA	SOT-89	20cn	VR20	4b	Ana
JE	-	BU4837FP3	Vdet-IC	3.7V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
JE	-	RT9166A-33CXL	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
JE-	-	RT9166A-33PXL	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
JE=	-	RT9166A-33GXL	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
JF	-	AP1116Y-15	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-89	20cg	VR1	4b	Ana
JF	-	BU4838FP3	Vdet-IC	3.8V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
JF	-	RT9166-21CXL	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JF-	-	RT9166-21PXL	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JG	-	2SJ316	p-MOSFET	Sw, U-Speed, LogL, 12V, 1A, 1.5W, <0.42Ω(0.5A), 10/70nS	PCP	20fi	-	4a	San
JG	-	AP1116Y-18	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-89	20cg	VR1	4b	Ana
JG	-	BU4839FP3	Vdet-IC	3.9V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
JG	-	RT9166-12CX	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
JG-	-	RT9166-12PX	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JH	-	2SB1518-D	Si-pnp	Lo-sat, 30V, 3A, 900mW, B=160..320	SOT-89	20tb	-	4g	Ren
JH	-	AP1116Y-25	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-89	20cg	VR1	4b	Ana
JH	-	BU4840FP3	Vdet-IC	4.0V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JH	-	RT9166A-12CXL	LVR-IC	LDO, 1.2V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
JH-	-	RT9166A-12PXL	LVR-IC	LDO, 1.2V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
JH=	-	RT9166A-12GXL	LVR-IC	LDO, 1.2V±2%, 600mA	SOT-89	20ch	VR1	4c	Rct
JI	-	2SJ381	p-MOSFET	Sw, U-Speed, LogL, 12V, 2A, 1.5W, <0.4Ω(0.5A), 20/100nS	PCP	20fi	-	4a	San
JI	-	AP1116Y-33	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20cg	VR1	4b	Ana
JJ	-	2SB1518-E	Si-pnp	Lo-sat, 30V, 3A, 900mW, B=250..500	SOT-89	20tb	-	4g	Ren
JJ	-	2SJ416	p-MOSFET	Sw, U-Speed, LogL, 30V, 2A, 1.5W, 10/110nS	PCP	20fi	-	4a	San
JJ	-	AP1116Y-50	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-89	20cg	VR1	4b	Ana
JJ	-	BU4841FP3	Vdet-IC	4.1V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
JJ	-	RT9166-15CX	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
JJ-	-	RT9166-15PX	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
JK	-	AP1115AY-35	LVR-IC	LDO, 3.5V±2%, 600mA	SOT-89	20ch	VR1	4b	Ana
JK	-	AP1115BY-35	LVR-IC	LDO, 3.5V±2%, 600mA	SOT-89	20vl	VR1	4b	Ana
JK	-	BU4842FP3	Vdet-IC	4.2V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
JK	-	RT9166-15CXL	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JK-	-	RT9166-15PXL	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JL	-	2SJ560	p-MOSFET	Sw, U-Speed, LogL, 20V, 1.5A, 1.3W, <1Ω(0.75A), 10/25ns	PCP	20fi	-	4a	San
JL	-	BU4843FP3	Vdet-IC	4.3V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
JL	-	RT9166A-15CXL	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
JL-	-	RT9166A-15PXL	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
JM	-	2SJ561	p-MOSFET	Sw, U-Speed, LogL, 30V, 1.5A, 1.3W, <0.6Ω(0.75A), 6/20ns	PCP	20fi	-	4a	San
JM	-	AP1115AY-30	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-89	20ch	VR1	4b	Ana
JM	-	AP1115BY-30	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-89	20vl	VR1	4b	Ana
JM	-	BU4844FP3	Vdet-IC	4.4V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
JM	-	RT9166-18CX	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
JM-	-	RT9166-18PX	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
JN	-	2SJ562	p-MOSFET	Sw, U-Speed, LogL, 20V, 2A, 1.5W, <0.315Ω(1A), 10/32ns	PCP	20fi	-	4a	San
JN	-	BU4845FP3	Vdet-IC	4.5V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
JN	-	RT9166-18CXL	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JN-	-	RT9166-18PXL	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JO	-	2SA1384-O	Si-pnp	Vid, 300V, 100mA, 500mW, B=50..150, >50MHz	SOT-89	20tb	-	4b	Tos
JO	-	2SJ563	p-MOSFET	Sw, U-Speed, LogL, 30V, 2A, 1.5W, <0.315Ω(1A), 7/23ns	PCP	20fi	-	4a	San
JO	-	AP1115AY	LVR-IC	LDO, Adjustable 1.25..13.8V, 600mA	SOT-89	20ck	VR20	4b	Ana
JO	-	AP1115BY	LVR-IC	LDO, Adjustable 1.25..13.8V, 600mA	SOT-89	20cm	VR20	4b	Ana
JO	-	KTA1668-O	Si-pnp	Drv, 80V, 1A, 500mW, B=60..120, 150MHz	SOT-89	20tb	-	4a	Kec
JP	-	2SJ578	p-MOSFET	Sw, U-Speed, LogL, 60V, 1A, 1.3W, <1.3Ω(0.5A), 6/21ns	PCP	20fi	-	4a	San
JP	-	AP1115AY-15	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-89	20ch	VR1	4b	Ana
JP	-	AP1115BY-15	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-89	20vl	VR1	4b	Ana
JP	-	BU4846FP3	Vdet-IC	4.6V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
JP	-	RT9166A-18CXL	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
JP-	-	RT9166A-18PXL	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
JQ	-	2SJ579	p-MOSFET	Sw, U-Speed, LogL, 60V, 1.2A, 1.5W, <0.8Ω(0.6A), 8/22ns	PCP	20fi	-	4a	San
JQ	-	AP1115AY-18	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-89	20ch	VR1	4b	Ana
JQ	-	AP1115BY-18	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-89	20vl	VR1	4b	Ana
JQ	-	BU4847FP3	Vdet-IC	4.7V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
JQ	-	RT9166-27CX	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
JR	-	2SA1384-R	Si-pnp	Vid, 300V, 100mA, 500mW, B=30..90, >50MHz	SOT-89	20tb	-	4b	Tos
JR	-	2SC5631	Si-npn	UHF/VHF WB-amp, 15V, 80mA, 800mW, 11GHz, B=80..160	UPAK	20tm	-	4g	Ren
JR	-	2SJ580	p-MOSFET	Sw, U-Speed, LogL, 60V, 1.8A, 1.5W, <0.4Ω(1A), 9/38ns	PCP	20fi	-	4a	San
JR	-	AP1115AY-25	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-89	20ch	VR1	4b	Ana
JR	-	AP1115BY-25	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-89	20vl	VR1	4b	Ana
JR	-	BU4848FP3	Vdet-IC	4.8V±1%, -Reset ODO	SOT-89	20vda	VD6	4zb	Rhm
JR	-	RT9166-28CX	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
JS	-	2SD2532	Si-npn	Lo-sat, 50V, 2A, 1W, B=120..300	SOT-89	20tb	-	4b	Ren
JS	-	AP1115AY-33	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-89	20ch	VR1	4b	Ana
JS	-	AP1115BY-33	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-89	20vl	VR1	4b	Ana
JS	-	BU4909FP3	Vdet-IC	0.9V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
JS	-	RT9166-28CXL	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JS-	-	RT9166-28PXL	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JT	-	AP1115AY-50	LVR-IC	LDO, 5.0V±2%, 600mA	SOT-89	20ch	VR1	4b	Ana
JT	-	AP1115BY-50	LVR-IC	LDO, 5.0V±2%, 600mA	SOT-89	20vl	VR1	4b	Ana
JT	-	BU4910FP3	Vdet-IC	1.0V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
JT	-	RT9166-30CX	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
JT-	-	RT9166-30PX	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
JU	-	BU4911FP3	Vdet-IC	1.1V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
JU	-	RT9166-30CXL	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JU-	-	RT9166-30PXL	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JV	-	BU4912FP3	Vdet-IC	1.2V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
JV	-	RT9166A-30CXL	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
JV-	-	RT9166A-30PXL	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JW	-	BU4913FP3	Vdet-IC	1.3V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
JW	-	RT9166-36CX	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
JX	-	BU4914FP3	Vdet-IC	1.4V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
JX	-	RT9166-36CXL	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JX-	-	RT9166-36PXL	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JY	-	2SJ244	p-MOSFET	V-MOS, LogL, 12V, 2A, <0.9Ω(0.5A), integr, Rgate	SOT-89	20fa	-	4b	Ren
JY	-	BU4915FP3	Vdet-IC	1.5V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
JY	-	KTA1668-Y	Si-pnp	Drv, 80V, 1A, 500mW, B=120..200, 150MHz	SOT-89	20tb	-	4a	Kec
JZ	-	BU4916FP3	Vdet-IC	1.6V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
JZ	-	RT9166-42CXL	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
JZ-	-	RT9166-42PXL	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
K	-	2SB1208	Si-pnp-Digi	AF-Drv, 20V, 2A, 1W, 120MHz, B>70, R2=10k	SOT-89	20tb	-	4g	Pan
K1	-	2SK2741	n-MOSFET	V-MOS, LogL, 60V, 5A, <0.3Ω(1.5A)	SOT-89	20fa	-	4b	Tos
K2	-	2SK2742	n-MOSFET	V-MOS, LogL, 100V, 3A, <0.45Ω(5A)	SOT-89	20fa	-	4b	Tos
K20	ji	XC6383B201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K21	ji	XC6383B211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K22	ji	XC6383B221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K23	ji	XC6383B231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K24	ji	XC6383B241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K25	ji	XC6383B251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K26	ji	XC6383B261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K27	ji	XC6383B271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K28	ji	XC6383B281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K29	ji	XC6383B291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K2F	-	DXT2907A-13	Si-pnp	GP, 60V, 600mA, 1W, B=75..300, >200MHz	SOT-89	20tb	-	4m	Di
K3	-	2SK2839	n-MOSFET	V-MOS, LogL, 30V, 10A, <0.06Ω(5A)	SOT-89	20fa	-	4b	Tos
K30	ji	XC6383B301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K31	ji	XC6383B311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K32	ji	XC6383B321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K33	ji	XC6383B331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K34	ji	XC6383B341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K35	ji	XC6383B351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K36	ji	XC6383B361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K37	ji	XC6383B371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K38	ji	XC6383B381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K39	ji	XC6383B391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K4	-	2SK2836	n-MOSFET	V-MOS, 600V, 1A, <9Ω0.5A)	SOT-89	20fa	-	4b	Tos
K40	ji	XC6383B401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K41	ji	XC6383B411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K42	ji	XC6383B421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K43	ji	XC6383B431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K44	ji	XC6383B441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K45	ji	XC6383B451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K46	ji	XC6383B461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K47	ji	XC6383B471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K48	ji	XC6383B481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K49	ji	XC6383B491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K50	ji	XC6383B501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K51	ji	XC6383B511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K52	ji	XC6383B521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K53	ji	XC6383B531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K54	ji	XC6383B541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K55	ji	XC6383B551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K56	ji	XC6383B561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K57	ji	XC6383B571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K58	ji	XC6383B581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K59	ji	XC6383B591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K60	ji	XC6383B601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K61	ji	XC6383B611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K62	ji	XC6383B621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K63	ji	XC6383B631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K64	ji	XC6383B641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K65	ji	XC6383B651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K66	ji	XC6383B661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K67	ji	XC6383B671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K68	ji	XC6383B681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K69	ji	XC6383B691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K70	ji	XC6383B701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89	20br	DC5	4h	Tor
K72	-	2N7002X	n-MOSFET	TMOS, 60V, 115mA, 500mW, 1.5Ω(250mA), 20/40ns	SOT-89	20fi	-	4g	Jce
K83	-	XC61CN0802P	Vdet-IC	0.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K93	-	XC61CN0902P	Vdet-IC	0.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
KA	-	2SC4409	Si-npn	AF, 80V, 2A, 500mW, B=120..240, 100MHz	SOT-89	20tb	-	4b	Tos
KA	-	2SK2103	n-MOSFET	V-MOS, LogL, 30V, 2A, <0.4Ω(5A)	SOT-89	20fa	-	4b	Rhm
KA	-	BSS87	n-MOSFET	V-MOS, LogL, 240V, 290mA, 16/55ns	SOT-89	20fa	-	4b	Phi
KA	-	BU4917FP3	Vdet-IC	1.7V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KB	-	2SC4539	Si-npn	Sw, Lo-sat, 40V, 1.2A, 500mW, B=120..400, 100MHz	SOT-89	20tb	-	4b	Tos
KB	-	2SK1311	n-MOSFET	V-MOS, LogL, 60V, 2A, <0.45Ω(5A)	SOT-89	20fa	-	4b	Pan
KB	-	BSS192	p-MOSFET	V-MOS, LogL, 240V, 150mA, 1W, <3.5Ω	SOT-89	20fi	-	4b	Sie
KB	-	BU4918FP3	Vdet-IC	1.8V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KC	-	2SC4540	Si-npn	Sw, Lo-sat, 60V, 1A, 500mW, B=120..400, 100MHz	SOT-89	20tb	-	4b	Tos
KC	-	2SK1467	n-MOSFET	LogL, Sw, 30V, 2A, 3.5W, <0.3Ω(1A), 7/35ns	SOT-89	20fi	-	4a	San
KC	-	2SK2463	n-MOSFET	V-MOS, LogL, 60V, 2A, <0.38Ω(5A)	SOT-89	20fa	-	4b	Rhm
KC	-	BU4919FP3	Vdet-IC	1.9V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KD	-	2SC4541	Si-npn	Sw, Lo-sat, 60V, 3A, 500mW, B=120..400, 100MHz	SOT-89	20tb	-	4b	Tos
KD	-	2SK1470	n-MOSFET	LogL, Sw, 60V, 2A, 3.5W, <0.45Ω(1A), 6/60ns	SOT-89	20fa	-	4a	San
KD	-	BU4920FP3	Vdet-IC	2.0V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KE	-	2SK1473	n-MOSFET	LogL, Sw, 100V, 2A, 3.5W, <0.95Ω(1A), 6/60ns	SOT-89	20fa	-	4a	San
KE	-	2SK3065	n-MOSFET	Sw, LogL, 30V, 2A, 500mW, 20/120ns, 0.25Ω	SOT-89	20fi	-	4b	Rhm
KE	-	BU4921FP3	Vdet-IC	2.1V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KF	-	2SK1724	n-MOSFET	LogL, Sw, 30V, 1A, 3.5W, <0.75Ω(500mA), 5/30ns	SOT-89	20fa	-	4a	San
KF	-	BU4922FP3	Vdet-IC	2.2V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KG	-	2SK1726	n-MOSFET	LogL, Sw, 60V, 1A, 3.5W, <1.2Ω(500mA), 5/30ns	SOT-89	20fa	-	4a	San
KG	-	BU4923FP3	Vdet-IC	2.3V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KH	-	2SK1728	n-MOSFET	LogL, Sw, 100V, 1A, 3.5W, <3.5Ω(500mA), 5/30ns	SOT-89	20fa	-	4a	San
KH	-	BU4924FP3	Vdet-IC	2.4V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KI	-	2SK2151	n-MOSFET	Sw, 20V, 1A, 3.5W, <0.75Ω(500mA), 8/30ns	SOT-89	20fi	-	4a	San
KJ	-	2SK2152	n-MOSFET	Sw, 20V, 2A, 3.5W, <0.25Ω(1A), 10/50ns	SOT-89	20fi	-	4a	San
KJ	-	BU4925FP3	Vdet-IC	2.5V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KK	-	2SB805-K	Si-pnp	AF-Amp, 100V, 700mA, 2W, 75MHz, B=200..400	SOT-89	20tb	-	4b	Nec
KK	-	BU4926FP3	Vdet-IC	2.6V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KL	-	2SB805-L	Si-pnp	AF-Amp, 100V, 700mA, 2W, 75MHz, B=135..270	SOT-89	20tb	-	4b	Nec
KL	-	BU4927FP3	Vdet-IC	2.7V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KM	-	2SB805-M	Si-pnp	AF-Amp, 100V, 700mA, 2W, 75MHz, B=90..180	SOT-89	20tb	-	4b	Nec
KM	-	2SK2171	n-FET	40V, 100mA, Idss>40mA, Up<5V	SOT-89	20fa	-	4a	San
KM	-	BST80	n-MOSFET	VMOS, 80V, 500mA, 1W, Rds=2Ω(500mA), 10/15ns	SOT-89	20fi	-	4g	Phi
KM	-	BU4928FP3	Vdet-IC	2.8V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KM3	-	2SK2171-3	n-FET	40V, 100mA, 800mW, Idss=40..52mA, Up<5V	SOT-89	20fi	-	4g	San
KM4	-	2SK2171-4	n-FET	40V, 100mA, 800mW, Idss=48..63mA, Up<5V	SOT-89	20fi	-	4g	San
KM5	-	2SK2171-5	n-FET	40V, 100mA, 800mW, Idss=57..75mA, Up<5V	SOT-89	20fi	-	4g	San
KN	-	2SK2218	n-FET	15V, 100mA, Idss>40mA, Up<4.5V	SOT-89	20fa	-	4a	San
KN	-	BST84	n-MOSFET	VMOS, 200V, 250mA, 1W, Rds=6Ω(250mA), 4/15ns	SOT-89	20fi	-	4g	Phi
KN	-	BU4929FP3	Vdet-IC	2.9V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KN3	-	2SK2218-3	n-FET	15V, 100mA, 400mW, Idss=40..52mA, Up<4,5V	SOT-89	20fi	-	4g	San
KN4	-	2SK2218-4	n-FET	15V, 100mA, 400mW, Idss=48..63mA, Up<4,5V	SOT-89	20fi	-	4g	San
KN5	-	2SK2218-5	n-FET	15V, 100mA, 400mW, Idss=57..75mA, Up<4,5V	SOT-89	20fi	-	4g	San
KO	-	2SK2260	n-MOSFET	V-MOS, 150V, 1.2A, <2.2Ω(0.5A)	SOT-89	20fa	-	4a	San
KO	-	BST86	n-MOSFET	VMOS, 180V, 300mA, 1W, Rds=7Ω(250mA), 6/15ns	SOT-89	20fi	-	4g	Phi
KO	-	KTA1001-O	Si-pnp	Cam. strobo-flash, 35V, 3A, 1W, B=100..200, 170MHz	SOT-89	20tb	-	4a	Kec
KP	-	2SB806-P	Si-pnp	AF-Amp, 120V, 700mA, 2W, 75MHz, B=200..400	SOT-89	20tb	-	4b	Nec
KP	-	2SK2316	n-MOSFET	Sw, U-sp, LogL, 20V, 2A, 1.5W, <0.2Ω(1A), 15/50ns	PCP	20fi	-	4g	San
KP	-	BU4930FP3	Vdet-IC	3.0V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KP3Q	-	2DB1386Q	Si-pnp	AF, Sw, 30V, 5A, 1W, B=120..270, 100MHz	SOT-89	20tb	-	4m	Di
KP3R	-	2DB1386R	Si-pnp	AF, Sw, 30V, 5A, 1W, B=180..390, 100MHz	SOT-89	20tb	-	4m	Di
KQ	-	2SB806-Q	Si-pnp	AF-Amp, 120V, 700mA, 2W, 75MHz, B=135..270	SOT-89	20tb	-	4b	Nec
KQ	-	BU4931FP3	Vdet-IC	3.1V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KR	-	2SB806-R	Si-pnp	AF-Amp, 120V, 700mA, 2W, 75MHz, B=90..180	SOT-89	20tb	-	4b	Nec
KR	-	BU4932FP3	Vdet-IC	3.2V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KS	-	2SD2533	Si-npn	Lo-sat, 80V, 2A, 1W, B=120..300, 160MHz	SOT-89	20tb	-	4b	Ren
KS	-	2SK3119	n-MOSFET	V-MOS, LogL, 20V, 2A, <0.48Ω(0.5A)	SOT-89	20fa	-	4a	San
KS	-	BU4933FP3	Vdet-IC	3.3V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KT	-	2SK3120	n-MOSFET	V-MOS, LogL, 30V, 2A, <0.48Ω(0.5A)	SOT-89	20fa	-	4a	San
KT	-	BU4934FP3	Vdet-IC	3.4V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KU	-	2SK3121	n-MOSFET	V-MOS, LogL, 20V, 3A, <0.22Ω(0.5A)	SOT-89	20fa	-	4a	San
KU	-	BU4935FP3	Vdet-IC	3.5V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KV	-	BU4936FP3	Vdet-IC	3.6V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KW	-	2SK3122	n-MOSFET	V-MOS, LogL, 30V, 3A, <0.32Ω(0.5A)	SOT-89	20fa	-	4a	San
KW	-	BU4937FP3	Vdet-IC	3.7V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KX	-	2SK3291	n-MOSFET	Sw, U-Hi-Sp, 60V, 1.6A, 1.3W, 5/18ns, 0.68Ω(0.8A)	PCP	20fi	-	4a	San
KX	-	BU4938FP3	Vdet-IC	3.8V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KY	-	2SK1764	n-MOSFET	V-MOS, LogL, 60V, 2A, <0.45Ω(5A)	SOT-89	20fa	-	4b	Ren



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KY	-	2SK3292	n-MOSFET	Sw, U-Hi-Sp, 60V, 2A, 1.5W, 7/24ns, 0.44Ω(1A)	PCP	20fi	-	4a	San
KY	-	BU4939FP3	Vdet-IC	3.9V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
KY	-	KTA1001-Y	Si-pnp	Cam. strobo-flash, 35V, 3A, 1W, B=160..320, 170MHz	SOT-89	20tb	-	4a	Kec
KZ	-	2SK3293	n-MOSFET	Sw, U-Hi-Sp, 60V, 3A, 1.5W, 7/30ns, 0.21Ω(1.5A)	PCP	20fi	-	4a	San
KZ	-	BU4940FP3	Vdet-IC	4.0V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
L0	-	RT9166-38CXL	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
L03	-	XC61CN1002P	Vdet-IC	1.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
L1	-	RT9166A-36CXL	LVR-IC	LDO, 3.6V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
L1-	-	RT9166A-36PXL	LVR-IC	LDO, 3.6V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
L13	-	XC61CN1102P	Vdet-IC	1.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
L2	-	RT9166-40CXL	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
L23	-	XC61CN1202P	Vdet-IC	1.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
L33	-	XC61CN1302P	Vdet-IC	1.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
L4	-	TC54VN1402MB	Vdet-IC	1.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
L43	-	XC61CN1402P	Vdet-IC	1.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
L5	-	RT9166A-15CX	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-89	20ch	VR1	4c	Rct
L5	-	TC54VN1502MB	Vdet-IC	1.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
L5-	-	RT9166A-15PX	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-89	20ch	VR1	4c	Rct
L53	-	XC61CN1502P	Vdet-IC	1.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
L6	-	RT9166A-37CXL	LVR-IC	LDO, 3.7V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
L6	-	TC54VN1602MB	Vdet-IC	1.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
L63	-	XC61CN1602P	Vdet-IC	1.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
L63	-	XE61CN1645PR	Vdet-IC	1.6V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
L65	-	LN61FN1612P	Vdet-IC	1.6V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
L65	-	XC61FN1612P	Vdet-IC	1.6V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
L66	-	LN61FN1642P	Vdet-IC	1.6V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
L66	-	XC61FN1642P	Vdet-IC	1.6V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
L67	-	LN61FN1652P	Vdet-IC	1.6V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
L67	-	XC61FN1652P	Vdet-IC	1.6V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
L7	-	TC54VN1702MB	Vdet-IC	1.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
L7-	-	RT9166A-28PXL	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
L73	-	XC61CN1702P	Vdet-IC	1.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
L73	-	XE61CN1745PR	Vdet-IC	1.7V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
L75	-	LN61FN1712P	Vdet-IC	1.7V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
L75	-	XC61FN1712P	Vdet-IC	1.7V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
L76	-	LN61FN1742P	Vdet-IC	1.7V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
L76	-	XC61FN1742P	Vdet-IC	1.7V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
L77	-	LN61FN1752P	Vdet-IC	1.7V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
L77	-	XC61FN1752P	Vdet-IC	1.7V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
L8	-	TC54VN1802MB	Vdet-IC	1.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
L83	-	XC61CN1802P	Vdet-IC	1.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
L83	-	XE61CN1845PR	Vdet-IC	1.8V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
L85	-	LN61FN1812P	Vdet-IC	1.8V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
L85	-	XC61FN1812P	Vdet-IC	1.8V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
L86	-	LN61FN1842P	Vdet-IC	1.8V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
L86	-	XC61FN1842P	Vdet-IC	1.8V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
L87	-	LN61FN1852P	Vdet-IC	1.8V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
L87	-	XC61FN1852P	Vdet-IC	1.8V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
L9	-	TC54VN1902MB	Vdet-IC	1.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
L9-	-	RT9166-16PX	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
L93	-	XC61CN1902P	Vdet-IC	1.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
L93	-	XE61CN1945PR	Vdet-IC	1.9V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
L95	-	LN61FN1912P	Vdet-IC	1.9V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
L95	-	XC61FN1912P	Vdet-IC	1.9V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
L96	-	LN61FN1942P	Vdet-IC	1.9V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
L96	-	XC61FN1942P	Vdet-IC	1.9V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
L97	-	LN61FN1952P	Vdet-IC	1.9V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
L97	-	XC61FN1952P	Vdet-IC	1.9V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
LA	-	2SA1681	Si-pnp	AF-Amp, Sw, 60V, 2A, 500mW, B=120..400, 100MHz	SOT-89	20tb	-	4b	Tos
LA	-	BU4941FP3	Vdet-IC	4.1V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
LA	-	HD2A3M	Si-npn-Digi	Sw, 60V, 1A, 2W, R1/R2=1k/1k	SOT-89	20tb	-	4b	Nec
LA	-	KTD1003-A	Si-npn	AF-Drv, 60V, 1A, 500mW, B=800..1600, >250MHz	SOT-89	20tb	-	4a	Kec
LA	-	RT9166-19CXL	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
LA25	-	LC3030CC3TR25	DC-DC-IC	PFM, step-up, 2.5V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA26	-	LC3030CC3TR26	DC-DC-IC	PFM, step-up, 2.6V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA27	-	LC3030CC3TR27	DC-DC-IC	PFM, step-up, 2.7V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA28	-	LC3030CC3TR28	DC-DC-IC	PFM, step-up, 2.8V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA29	-	LC3030CC3TR29	DC-DC-IC	PFM, step-up, 2.9V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA30	-	LC3030CC3TR30	DC-DC-IC	PFM, step-up, 3.0V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA31	-	LC3030CC3TR31	DC-DC-IC	PFM, step-up, 3.1V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LA32	-	LC3030CC3TR32	DC-DC-IC	PFM, step-up, 3.2V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA33	-	LC3030CC3TR33	DC-DC-IC	PFM, step-up, 3.3V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA34	-	LC3030CC3TR34	DC-DC-IC	PFM, step-up, 3.4V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA35	-	LC3030CC3TR35	DC-DC-IC	PFM, step-up, 3.5V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA36	-	LC3030CC3TR36	DC-DC-IC	PFM, step-up, 3.6V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA37	-	LC3030CC3TR37	DC-DC-IC	PFM, step-up, 3.7V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA38	-	LC3030CC3TR38	DC-DC-IC	PFM, step-up, 3.8V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA39	-	LC3030CC3TR39	DC-DC-IC	PFM, step-up, 3.9V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA40	-	LC3030CC3TR40	DC-DC-IC	PFM, step-up, 4.0V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA41	-	LC3030CC3TR41	DC-DC-IC	PFM, step-up, 4.1V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA42	-	LC3030CC3TR42	DC-DC-IC	PFM, step-up, 4.2V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA43	-	LC3030CC3TR43	DC-DC-IC	PFM, step-up, 4.3V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA44	-	LC3030CC3TR44	DC-DC-IC	PFM, step-up, 4.4V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA45	-	LC3030CC3TR45	DC-DC-IC	PFM, step-up, 4.5V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA46	-	LC3030CC3TR46	DC-DC-IC	PFM, step-up, 4.6V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA47	-	LC3030CC3TR47	DC-DC-IC	PFM, step-up, 4.7V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA48	-	LC3030CC3TR48	DC-DC-IC	PFM, step-up, 4.8V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA49	-	LC3030CC3TR49	DC-DC-IC	PFM, step-up, 4.9V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA50	-	LC3030CC3TR50	DC-DC-IC	PFM, step-up, 5.0V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA51	-	LC3030CC3TR51	DC-DC-IC	PFM, step-up, 5.1V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA52	-	LC3030CC3TR52	DC-DC-IC	PFM, step-up, 5.2V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA53	-	LC3030CC3TR53	DC-DC-IC	PFM, step-up, 5.3V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA54	-	LC3030CC3TR54	DC-DC-IC	PFM, step-up, 5.4V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA55	-	LC3030CC3TR55	DC-DC-IC	PFM, step-up, 5.5V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA56	-	LC3030CC3TR56	DC-DC-IC	PFM, step-up, 5.6V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA57	-	LC3030CC3TR57	DC-DC-IC	PFM, step-up, 5.7V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA58	-	LC3030CC3TR58	DC-DC-IC	PFM, step-up, 5.8V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA59	-	LC3030CC3TR59	DC-DC-IC	PFM, step-up, 5.9V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LA60	-	LC3030CC3TR60	DC-DC-IC	PFM, step-up, 6.0V±2%, 200mA	SOT-89	20bq	DC2	4bb	Lch
LB	-	2SA1734	Si-pnp	Sw, Lo-sat, 40V, 1.2A, 500mW, B=120..400, 100MHz	SOT-89	20tb	-	4b	Tos
LB	-	BU4942FP3	Vdet-IC	4.2V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
LB	-	HD2F3P	Si-npn-Digi	Sw, 80V, 1A, 2W, R1/R2=2k2/10k	SOT-89	20tb	-	4b	Nec
LB	-	KTD1003-B	Si-npn	AF-Drv, 60V, 1A, 500mW, B=1200..2400, >250MHz	SOT-89	20tb	-	4a	Kec
LB	-	RT9166A-14CXL	LVR-IC	LDO, 1.4V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
LC	-	2SA1735	Si-pnp	Sw, Lo-sat, 60V, 1A, 500mW, B=120..400, 100MHz	SOT-89	20tb	-	4b	Tos
LC	-	2SC4357-C	Si-npn	Relay-Drv, 60V, 2A, 500mW, 80MHz, B=55..110	SOT-89	20tb	-	4a	Mit
LC	-	BU4943FP3	Vdet-IC	4.3V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
LC	-	HD2L3N	Si-npn-Digi	Sw, 80V, 1A, 2W, R1/R2=4k7/10k	SOT-89	20tb	-	4b	Nec
LC	-	KTD1003-C	Si-npn	AF-Drv, 60V, 1A, 500mW, B=2000..3200, >250MHz	SOT-89	20tb	-	4a	Kec
LC	-	RT9166A-32CX	LVR-IC	LDO, 3.2V±2%, 600mA	SOT-89	20ch	VR1	4c	Rct
LC-	-	RT9166A-32PX	LVR-IC	LDO, 3.2V±2%, 600mA	SOT-89	20ch	VR1	4c	Rct
LD	-	2SA1736	Si-pnp	Sw, Lo-sat, 60V, 3A, 500mW, B=120..400, 100MHz	SOT-89	20tb	-	4b	Tos
LD	-	2SC4357-D	Si-npn	Relay-Drv, 60V, 2A, 500mW, 80MHz, B=90..180	SOT-89	20tb	-	4a	Mit
LD	-	BU4944FP3	Vdet-IC	4.4V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
LD	-	HD2A4M	Si-npn-Digi	Sw, 60V, 1A, 2W, R1/R2=10k/10k	SOT-89	20tb	-	4b	Nec
LD-	-	RT9166A-29PXL	LVR-IC	LDO, 2.9V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
LD25	-	BL8534CC3TR25	DC-DC-IC	PFM step-up, 2.5V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD26	-	BL8534CC3TR26	DC-DC-IC	PFM step-up, 2.6V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD27	-	BL8534CC3TR27	DC-DC-IC	PFM step-up, 2.7V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD28	-	BL8534CC3TR28	DC-DC-IC	PFM step-up, 2.8V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD29	-	BL8534CC3TR29	DC-DC-IC	PFM step-up, 2.9V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD30	-	BL8534CC3TR30	DC-DC-IC	PFM step-up, 3.0V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD31	-	BL8534CC3TR31	DC-DC-IC	PFM step-up, 3.1V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD32	-	BL8534CC3TR32	DC-DC-IC	PFM step-up, 3.2V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD33	-	BL8534CC3TR33	DC-DC-IC	PFM step-up, 3.3V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD34	-	BL8534CC3TR34	DC-DC-IC	PFM step-up, 3.4V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD35	-	BL8534CC3TR35	DC-DC-IC	PFM step-up, 3.5V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD36	-	BL8534CC3TR36	DC-DC-IC	PFM step-up, 3.6V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD37	-	BL8534CC3TR37	DC-DC-IC	PFM step-up, 3.7V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD38	-	BL8534CC3TR38	DC-DC-IC	PFM step-up, 3.8V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD39	-	BL8534CC3TR39	DC-DC-IC	PFM step-up, 3.9V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD40	-	BL8534CC3TR40	DC-DC-IC	PFM step-up, 4.0V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD41	-	BL8534CC3TR41	DC-DC-IC	PFM step-up, 4.1V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD42	-	BL8534CC3TR42	DC-DC-IC	PFM step-up, 4.2V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD43	-	BL8534CC3TR43	DC-DC-IC	PFM step-up, 4.3V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD44	-	BL8534CC3TR44	DC-DC-IC	PFM step-up, 4.4V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD45	-	BL8534CC3TR45	DC-DC-IC	PFM step-up, 4.5V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD46	-	BL8534CC3TR46	DC-DC-IC	PFM step-up, 4.6V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD47	-	BL8534CC3TR47	DC-DC-IC	PFM step-up, 4.7V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD48	-	BL8534CC3TR48	DC-DC-IC	PFM step-up, 4.8V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LD49	-	BL8534CC3TR49	DC-DC-IC	PFM step-up, 4.9V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD50	-	BL8534CC3TR50	DC-DC-IC	PFM step-up, 5.0V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD51	-	BL8534CC3TR51	DC-DC-IC	PFM step-up, 5.1V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD52	-	BL8534CC3TR52	DC-DC-IC	PFM step-up, 5.2V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD53	-	BL8534CC3TR53	DC-DC-IC	PFM step-up, 5.3V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD54	-	BL8534CC3TR54	DC-DC-IC	PFM step-up, 5.4V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD55	-	BL8534CC3TR55	DC-DC-IC	PFM step-up, 5.5V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD56	-	BL8534CC3TR56	DC-DC-IC	PFM step-up, 5.6V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD57	-	BL8534CC3TR57	DC-DC-IC	PFM step-up, 5.7V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD58	-	BL8534CC3TR58	DC-DC-IC	PFM step-up, 5.8V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD59	-	BL8534CC3TR59	DC-DC-IC	PFM step-up, 5.9V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LD60	-	BL8534CC3TR60	DC-DC-IC	PFM step-up, 6.0V±2%, 200mA	SOT-89	20bq	DC2	4b	Shb
LE	-	2SC4357-E	Si-npn	Relay-Drv, 60V, 2A, 500mW, 80MHz, B=150..300	SOT-89	20tb	-	4a	Mit
LE	-	BU4945FP3	Vdet-IC	4.5V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
LE	-	HD2L2Q	Si-npn-Digi	Sw, 80V, 1A, 2W, R1/R2=0k47/4k7	SOT-89	20tb	-	4b	Nec
LE-	-	RT9166-29PXL	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
LF	-	BU4946FP3	Vdet-IC	4.6V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
LF	-	HD2F2Q	Si-npn-Digi	Sw, 80V, 1A, 2W, R1/R2=0k22/2k2	SOT-89	20tb	-	4b	Nec
LF-	-	RT9166-35PXL	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
LG	-	BU4947FP3	Vdet-IC	4.7V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
LG	-	RT9166A-36CX	LVR-IC	LDO, 3.6V±2%, 600mA	SOT-89	20ch	VR1	4c	Rct
LH	-	BU4948FP3	Vdet-IC	4.8V±1%, +Reset PPO	SOT-89	20vda	VD7	4zb	Rhm
LH	-	RT9166-20CXL	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
LJ-	-	RT9166-26PXL	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20vl	VR1	4c	Rct
LK	-	2SD1000-K	Si-npn	AF-Amp, 60V, 700mA, 2W, 100MHz, B=200..400	SOT-89	20tb	-	4a	Nec
LK-	-	RT9166A-42PX	LVR-IC	LDO, 4.2V±2%, 600mA	SOT-89	20ch	VR1	4c	Rct
LL	-	2SD1000-L	Si-npn	AF-Amp, 60V, 700mA, 2W, 100MHz, B=135..270	SOT-89	20tb	-	4a	Nec
LL-	-	RT9166-13PX	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-89	20ch	VR1	4c	Rct
LM	-	2SD1000-M	Si-npn	AF-Amp, 60V, 700mA, 2W, 100MHz, B=90..180	SOT-89	20tb	-	4a	Nec
LM	-	BST120	p-MOSFET	VMOS, 60V 300mA, 1W, Rds=6Ω(250mA), 4/15ns	SOT-89	20fi	-	4g	Phi
LM-	-	RT9818B-42PX	Vdet-IC	4.2V±1.5%, -Reset ODO, Td=55ms	SOT-89	20vda	VD6	4g	Rct
LN	-	BST122	p-MOSFET	VMOS, 50V 250mA, 1W, Rds=7.5Ω(250mA), 5/10ns	SOT-89	20fi	-	4g	Phi
LN-	-	RT9818A-42PX	Vdet-IC	4.2V±1.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Rct
LP	-	HD1A3M	Si-npn-Digi	Sw, 80V, 1A, 2W, R1/R2=1k/1k	SOT-89	20tb	-	4b	Nec
LP-	-	RT9818E-27PX	Vdet-IC	2.7V±1.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Rct
LQ	-	HD1F3P	Si-npn-Digi	Sw, 80V, 1A, 2W, R1/R2=2k2/10k	SOT-89	20tb	-	4b	Nec
LQ-	-	RT9818E-40PX	Vdet-IC	4.0V±1.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Rct
LR	-	HD1L3N	Si-npn-Digi	Sw, 80V, 1A, 2W, R1/R2=4k7/10k	SOT-89	20tb	-	4b	Nec
LR-	-	RT9818C-27PX	Vdet-IC	2.7V±1.5%, -Reset ODO, Td=220ms	SOT-89	20vda	VD6	4g	Rct
LS	-	HD1A4M	Si-npn-Digi	Sw, 80V, 1A, 2W, R1/R2=10k/10k	SOT-89	20tb	-	4b	Nec
LS-	-	RT9166A-31PXL	LVR-IC	LDO, 3.1V±2%, 600mA	SOT-89	20vl	VR1	4c	Rct
LT	-	HD1L2Q	Si-npn-Digi	Sw, 80V, 1A, 2W, R1/R2=0k47/4k7	SOT-89	20tb	-	4b	Nec
LU	-	HD1F2Q	Si-npn-Digi	Sw, 80V, 1A, 2W, R1/R2=0k22/2k2	SOT-89	20tb	-	4b	Nec
LX	-	HD1A4A	Si-npn-Digi	Sw, 80V, 1A, 2W, R2=10k	SOT-89	20tb	-	4b	Nec
M	-	2SK690	n-FET	GaAs, UHF, 2x Z-Di, 10V, 600mA, 1GHz	SOT-89	20fa	-	4b	Pan
M0	-	TC54VN2002MB	Vdet-IC	2.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
M03	-	XC61CN2002P	Vdet-IC	2.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
M03	-	XE61CN2045PR	Vdet-IC	2.0V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
M05	-	LN61FN2012P	Vdet-IC	2.0V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
M05	-	XC61FN2012P	Vdet-IC	2.0V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
M06	-	LN61FN2042P	Vdet-IC	2.0V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
M06	-	XC61FN2042P	Vdet-IC	2.0V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
M07	-	LN61FN2052P	Vdet-IC	2.0V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
M07	-	XC61FN2052P	Vdet-IC	2.0V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
M1	-	D70F2T1	Si-npn	Sw, Lo-sat, 50V, 2A, 100/1100ns	SOT-89	20tb	-	4b	Gen
M1	-	TC54VN2102MB	Vdet-IC	2.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
M13	-	XC61CN2102P	Vdet-IC	2.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
M13	-	XE61CN2145PR	Vdet-IC	2.1V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
M15	-	LN61FN2112P	Vdet-IC	2.1V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
M15	-	XC61FN2112P	Vdet-IC	2.1V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
M16	-	LN61FN2142P	Vdet-IC	2.1V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
M16	-	XC61FN2142P	Vdet-IC	2.1V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
M17	-	LN61FN2152P	Vdet-IC	2.1V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
M17	-	XC61FN2152P	Vdet-IC	2.1V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
M2	-	2PD2150	Si-npn	DC/DC-Conv, 20V, 3A, 500mW, B=180..390, 220MHz	SOT-89	20tb	-	4g	Phi
M2	-	TC54VN2202MB	Vdet-IC	2.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
M23	-	XC61CN2202P	Vdet-IC	2.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
M23	-	XE61CN2245PR	Vdet-IC	2.2V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
M25	-	LN61FN2212P	Vdet-IC	2.2V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
M25	-	XC61FN2212P	Vdet-IC	2.2V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M26	-	LN61FN2242P	Vdet-IC	2.2V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
M26	-	XC61FN2242P	Vdet-IC	2.2V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
M27	-	LN61FN2252P	Vdet-IC	2.2V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
M27	-	XC61FN2252P	Vdet-IC	2.2V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
M3	-	TC54VN2302MB	Vdet-IC	2.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
M3	-	XC61FN2312P	Vdet-IC	2.3V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
M33	-	XC61CN2302P	Vdet-IC	2.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
M33	-	XE61CN2345PR	Vdet-IC	2.3V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
M35	-	LN61FN2312P	Vdet-IC	2.3V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
M36	-	LN61FN2342P	Vdet-IC	2.3V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
M36	-	XC61FN2342P	Vdet-IC	2.3V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
M37	-	LN61FN2352P	Vdet-IC	2.3V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
M37	-	XC61FN2352P	Vdet-IC	2.3V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
M4	-	TC54VN2402MB	Vdet-IC	2.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
M43	-	XC61CN2402P	Vdet-IC	2.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
M43	-	XE61CN2445PR	Vdet-IC	2.4V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
M45	-	LN61FN2412P	Vdet-IC	2.4V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
M45	-	XC61FN2412P	Vdet-IC	2.4V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
M46	-	LN61FN2442P	Vdet-IC	2.4V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
M46	-	XC61FN2442P	Vdet-IC	2.4V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
M47	-	LN61FN2452P	Vdet-IC	2.4V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
M47	-	XC61FN2452P	Vdet-IC	2.4V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
M5	-	TC54VN2502MB	Vdet-IC	2.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
M53	-	XC61CN2502P	Vdet-IC	2.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
M53	-	XE61CN2545PR	Vdet-IC	2.5V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
M55	-	LN61FN2512P	Vdet-IC	2.5V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
M55	-	XC61FN2512P	Vdet-IC	2.5V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
M56	-	LN61FN2542P	Vdet-IC	2.5V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
M56	-	XC61FN2542P	Vdet-IC	2.5V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
M57	-	LN61FN2552P	Vdet-IC	2.5V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
M57	-	XC61FN2552P	Vdet-IC	2.5V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
M6	-	TC54VN2602MB	Vdet-IC	2.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
M63	-	XC61CN2602P	Vdet-IC	2.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
M63	-	XE61CN2645PR	Vdet-IC	2.6V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
M65	-	LN61FN2612P	Vdet-IC	2.6V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
M65	-	XC61FN2612P	Vdet-IC	2.6V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
M66	-	LN61FN2642P	Vdet-IC	2.6V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
M66	-	XC61FN2642P	Vdet-IC	2.6V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
M67	-	LN61FN2652P	Vdet-IC	2.6V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
M67	-	XC61FN2652P	Vdet-IC	2.6V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
M7	-	TC54VN2702MB	Vdet-IC	2.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
M73	-	XC61CN2702P	Vdet-IC	2.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
M73	-	XE61CN2745PR	Vdet-IC	2.7V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
M75	-	LN61FN2712P	Vdet-IC	2.7V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
M75	-	XC61FN2712P	Vdet-IC	2.7V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
M76	-	LN61FN2742P	Vdet-IC	2.7V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
M76	-	XC61FN2742P	Vdet-IC	2.7V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
M77	-	LN61FN2752P	Vdet-IC	2.7V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
M77	-	XC61FN2752P	Vdet-IC	2.7V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
M8	-	TC54VN2802MB	Vdet-IC	2.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
M83	-	XC61CN2802P	Vdet-IC	2.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
M83	-	XE61CN2845PR	Vdet-IC	2.8V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
M85	-	LN61FN2812P	Vdet-IC	2.8V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
M85	-	XC61FN2812P	Vdet-IC	2.8V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
M86	-	LN61FN2842P	Vdet-IC	2.8V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
M86	-	XC61FN2842P	Vdet-IC	2.8V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
M87	-	LN61FN2852P	Vdet-IC	2.8V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
M87	-	XC61FN2852P	Vdet-IC	2.8V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
M9	-	TC54VN2902MB	Vdet-IC	2.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
M93	-	XC61CN2902P	Vdet-IC	2.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
M93	-	XE61CN2945PR	Vdet-IC	2.9V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
M95	-	LN61FN2912P	Vdet-IC	2.9V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
M95	-	XC61FN2912P	Vdet-IC	2.9V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
M96	-	LN61FN2942P	Vdet-IC	2.9V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
M96	-	XC61FN2942P	Vdet-IC	2.9V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
M97	-	LN61FN2952P	Vdet-IC	2.9V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
M97	-	XC61FN2952P	Vdet-IC	2.9V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
M9X	-	TFM1759	Si-pnp	Vid, 400V, 300mA, 600mW, B=56..270MHz	SOT-89	20tb	-	4g	Tfr
MA	-	2SC3301	Si-npn	UHF, 15V, 80mA, 800mW, B=30..200, 7GHz	SOT-89	20tb	-	4b	Tos
MA	-	M5278L05M	LVR-IC	5V±2.5%, 100mA	SOT-89	20eu	VR1	4b	Mit



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MB	-	M5278L56M	LVR-IC	5.6V±2.5%, 100mA	SOT-89	20eu	VR1	4b	Mit
MD	-	M5278L08M	LVR-IC	8V±2.5%, 100mA	SOT-89	20eu	VR1	4b	Mit
MD5-12	-	AMS5312	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-13	-	AMS5313	LVR-IC	LDO, 1.3V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-14	-	AMS5314	LVR-IC	LDO, 1.4V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-15	-	AMS5315	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-16	-	AMS5316	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-17	-	AMS5317	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-18	-	AMS5318	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-19	-	AMS5319	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-20	-	AMS5320	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-21	-	AMS5321	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-22	-	AMS5322	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-23	-	AMS5323	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-24	-	AMS5324	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-25	-	AMS5325	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-26	-	AMS5326	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-27	-	AMS5327	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-28	-	AMS5328	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-29	-	AMS5329	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-30	-	AMS5330	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-31	-	AMS5331	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-32	-	AMS5332	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-33	-	AMS5333	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-34	-	AMS5334	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-35	-	AMS5335	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-36	-	AMS5336	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-37	-	AMS5337	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-38	-	AMS5338	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-39	-	AMS5339	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-40	-	AMS5340	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-41	-	AMS5341	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-42	-	AMS5342	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-43	-	AMS5343	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-44	-	AMS5344	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-45	-	AMS5345	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-46	-	AMS5346	LVR-IC	LDO, 4.6V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-47	-	AMS5347	LVR-IC	LDO, 4.7V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-48	-	AMS5348	LVR-IC	LDO, 4.8V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-49	-	AMS5349	LVR-IC	LDO, 4.9V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-50	-	AMS5350	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-51	-	AMS5351	LVR-IC	LDO, 5.1V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-52	-	AMS5352	LVR-IC	LDO, 5.2V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-53	-	AMS5353	LVR-IC	LDO, 5.3V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-54	-	AMS5354	LVR-IC	LDO, 5.4V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-55	-	AMS5355	LVR-IC	LDO, 5.5V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-56	-	AMS5356	LVR-IC	LDO, 5.6V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-57	-	AMS5357	LVR-IC	LDO, 5.7V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-58	-	AMS5358	LVR-IC	LDO, 5.8V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-59	-	AMS5359	LVR-IC	LDO, 5.9V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-60	-	AMS5360	LVR-IC	LDO, 6.0V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-61	-	AMS5361	LVR-IC	LDO, 6.1V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-62	-	AMS5362	LVR-IC	LDO, 6.2V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-63	-	AMS5363	LVR-IC	LDO, 6.3V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-64	-	AMS5364	LVR-IC	LDO, 6.4V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-65	-	AMS5365	LVR-IC	LDO, 6.5V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-66	-	AMS5366	LVR-IC	LDO, 6.6V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-67	-	AMS5367	LVR-IC	LDO, 6.7V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-68	-	AMS5368	LVR-IC	LDO, 6.8V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-69	-	AMS5369	LVR-IC	LDO, 6.9V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
MD5-70	-	AMS5370	LVR-IC	LDO, 7.0V±2%, 500mA	SOT-89	20cj	VR1	4g	Ams
ME	-	2SC3268	Si-npn	VHF/UHF, 17V, 70mA, 300mW, B=25..100, 5GHz	SOT-89	20tb	-	4b	Tos
ME	-	M5278L09M	LVR-IC	9V±2.5%, 100mA	SOT-89	20eu	VR1	4b	Mit
MF	-	M5278L10M	LVR-IC	10V±2.5%, 100mA	SOT-89	20eu	VR1	4b	Mit
MG	-	M5278L12M	LVR-IC	12V±2.5%, 100mA	SOT-89	20eu	VR1	4b	Mit
MH	-	2SC3607	Si-npn	VHF/UHF, LN, 20V, 80mA, 400mW, 6.5GHz, B=30..250	SOT-89	20tb	-	4g	Tos
MH	-	M5278L15M	LVR-IC	15V±2.5%, 100mA	SOT-89	20eu	VR1	4b	Mit
MK	-	2SB799-K	Si-pnp	AF-Amp, 60V, 1A, 2W, 120MHz, B=90..180	SOT-89	20tb	-	4b	Nec
ML	-	2SB799-L	Si-pnp	AF-Amp, 60V, 1A, 2W, 120MHz, B=135..270	SOT-89	20tb	-	4b	Nec
MM	-	2SB799-M	Si-pnp	AF-Amp, 60V, 1A, 2W, 120MHz, B=200..400	SOT-89	20tb	-	4b	Nec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MO	-	2SC2873-O	Si-npn	GP, 30V, 1.5A, 500mW, B=50..100, 120MHz	SOT-89	20tb	-	4b	Tos
MP	-	HR1A3M	Si-pnp-Digi	Sw, 80V, 1A, 2W, R1/R2=1k/1k	SOT-89	20tb	-	4b	Nec
MQ	-	HR1F3P	Si-pnp-Digi	Sw, 80V, 1A, 2W, R1/R2=2k2/10k	SOT-89	20tb	-	4b	Nec
MR	-	HR1L3N	Si-pnp-Digi	Sw, 80V, 1A, 2W, R1/R2=4k7/10k	SOT-89	20tb	-	4b	Nec
MS	-	HR1A4M	Si-pnp-Digi	Sw, 80V, 1A, 2W, R1/R2=10k/10k	SOT-89	20tb	-	4b	Nec
MT	-	HR1L2Q	Si-pnp-Digi	Sw, 80V, 1A, 2W, R1/R2=0k47/4k7	SOT-89	20tb	-	4b	Nec
MU	-	HR1F2Q	Si-pnp-Digi	Sw, 80V, 1A, 2W, R1/R2=0k22/2k2	SOT-89	20tb	-	4b	Nec
MX	-	HR1A4A	Si-pnp-Digi	Sw, 80V, 1A, 2W, R2=10k	SOT-89	20tb	-	4b	Nec
MY	-	2SC2873-Y	Si-npn	GP, 30V, 1.5A, 500mW, B=90..180, 120MHz	SOT-89	20tb	-	4b	Tos
MY	-	2SJ278	p-MOSFET	V-MOS, LogL, 60V, 1A, <0.83Ω(0.5A)	SOT-89	20fa	-	4b	Ren
N0	-	TC54VN3002MB	Vdet-IC	3.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
N03	-	XC61CN3002P	Vdet-IC	3.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
N03	-	XE61CN3045PR	Vdet-IC	3.0V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
N05	-	LN61FN3012P	Vdet-IC	3.0V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
N05	-	XC61FN3012P	Vdet-IC	3.0V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
N06	-	LN61FN3042P	Vdet-IC	3.0V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
N06	-	XC61FN3042P	Vdet-IC	3.0V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
N07	-	LN61FN3052P	Vdet-IC	3.0V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
N07	-	XC61FN3052P	Vdet-IC	3.0V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
N1	-	D71F2T1	Si-pnp	Sw, Lo-sat, 50V, 2A, 100/1100ns	SOT-89	20tb	-	4b	Gen
N1	-	FCX491	Si-npn	GP, 80V, 1A, 1W, B=100..300, >150MHz	SOT-89	20tb	-	4b	Zx
N1	-	RT1N137P	Si-npn-Digi	Sw, 40V, 1A, 500mW, 150MHz, R1/R2=1k/22k	SOT-89	20tb	-	4a	Mit
N1	-	TC54VN3102MB	Vdet-IC	3.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
N11B	-	FC61N113PG	Vdet-IC	1.1V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N11B	-	ML61N113P	Vdet-IC	1.1V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N11I	-	BL8060CC3TR11	LVR-IC	LDO, 1.1V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N11IB	-	BL8060CC3BTR11	LVR-IC	LDO, 1.1V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N12B	-	FC61N123PG	Vdet-IC	1.2V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N12B	-	ML61N123P	Vdet-IC	1.2V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N12I	-	BL8060CC3TR12	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N12IB	-	BL8060CC3BTR12	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N13	-	XC61CN3102P	Vdet-IC	3.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
N13	-	XE61CN3145PR	Vdet-IC	3.1V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
N13B	-	FC61N133PG	Vdet-IC	1.3V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N13B	-	ML61N133P	Vdet-IC	1.3V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N13I	-	BL8060CC3TR13	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N13IB	-	BL8060CC3BTR13	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N14B	-	FC61N143PG	Vdet-IC	1.4V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N14B	-	ML61N143P	Vdet-IC	1.4V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N14I	-	BL8060CC3TR14	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N14IB	-	BL8060CC3BTR14	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N15	-	LN61FN3112P	Vdet-IC	3.1V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
N15	-	XC61FN3112P	Vdet-IC	3.1V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
N15B	-	FC61N153PG	Vdet-IC	1.5V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N15B	-	ML61N153P	Vdet-IC	1.5V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N15I	-	BL8060CC3TR15	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N15IB	-	BL8060CC3BTR15	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N16	-	LN61FN3142P	Vdet-IC	3.1V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
N16	-	XC61FN3142P	Vdet-IC	3.1V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
N16B	-	FC61N163PG	Vdet-IC	1.6V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N16B	-	ML61N163P	Vdet-IC	1.6V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N16I	-	BL8060CC3TR16	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N16IB	-	BL8060CC3BTR16	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N17	-	LN61FN3152P	Vdet-IC	3.1V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
N17	-	XC61FN3152P	Vdet-IC	3.1V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
N17B	-	FC61N173PG	Vdet-IC	1.7V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N17B	-	ML61N173P	Vdet-IC	1.7V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N17I	-	BL8060CC3TR17	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N17IB	-	BL8060CC3BTR17	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N18B	-	FC61N183PG	Vdet-IC	1.8V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N18B	-	ML61N183P	Vdet-IC	1.8V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N18I	-	BL8060CC3TR18	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N18IB	-	BL8060CC3BTR18	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N19B	-	FC61N193PG	Vdet-IC	1.9V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N19B	-	ML61N193P	Vdet-IC	1.9V±3%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N19I	-	BL8060CC3TR19	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N19IB	-	BL8060CC3BTR19	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N2	-	FCX491A	Si-npn	GP, 40V, 1A, 1W, B=300..900, 150MHz	SOT-89	20tb	-	4g	Zx
N2	-	TC54VN3202MB	Vdet-IC	3.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
N20B	-	FC61N202PG	Vdet-IC	2.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N20B	-	ML61N202P	Vdet-IC	2.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N20I	-	BL8060CC3TR20	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N20IB	-	BL8060CC3BTR20	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N21B	-	FC61N212PG	Vdet-IC	2.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N21B	-	ML61N212P	Vdet-IC	2.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N21I	-	BL8060CC3TR21	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N21IB	-	BL8060CC3BTR21	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N22B	-	FC61N222PG	Vdet-IC	2.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N22B	-	ML61N222P	Vdet-IC	2.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N22I	-	BL8060CC3TR22	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N22IB	-	BL8060CC3BTR22	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N23	-	XC61CN3202P	Vdet-IC	3.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
N23	-	XE61CN3245PR	Vdet-IC	3.2V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
N23B	-	FC61N232PG	Vdet-IC	2.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N23B	-	ML61N232P	Vdet-IC	2.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N23I	-	BL8060CC3TR23	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N23IB	-	BL8060CC3BTR23	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N23P	-	2DD1766P	Si-npn	AF, Sw, 40V, 2A, 1W, B=82..180, 220MHz	SOT-89	20tb	-	4m	Di
N23Q	-	2DD1766Q	Si-npn	AF, Sw, 40V, 2A, 1W, B=120..270, 220MHz	SOT-89	20tb	-	4m	Di
N23R	-	2DD1766R	Si-npn	AF, Sw, 40V, 2A, 1W, B=180..390, 220MHz	SOT-89	20tb	-	4m	Di
N24B	-	FC61N242PG	Vdet-IC	2.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N24B	-	ML61N242P	Vdet-IC	2.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N24I	-	BL8060CC3TR24	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N24IB	-	BL8060CC3BTR24	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N25	-	LN61FN3212P	Vdet-IC	3.2V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
N25	-	XC61FN3212P	Vdet-IC	3.2V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
N25B	-	FC61N252PG	Vdet-IC	2.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N25B	-	ML61N252P	Vdet-IC	2.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N25I	-	BL8060CC3TR25	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N25IB	-	BL8060CC3BTR25	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N26	-	LN61FN3242P	Vdet-IC	3.2V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
N26	-	XC61FN3242P	Vdet-IC	3.2V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
N26B	-	FC61N262PG	Vdet-IC	2.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N26B	-	ML61N262P	Vdet-IC	2.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N26I	-	BL8060CC3TR26	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N26IB	-	BL8060CC3BTR26	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N27	-	LN61FN3252P	Vdet-IC	3.2V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
N27	-	XC61FN3252P	Vdet-IC	3.2V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
N27B	-	FC61N272PG	Vdet-IC	2.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N27B	-	ML61N272P	Vdet-IC	2.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N27I	-	BL8060CC3TR27	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N27IB	-	BL8060CC3BTR27	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N28B	-	FC61N282PG	Vdet-IC	2.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N28B	-	ML61N282P	Vdet-IC	2.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N28I	-	BL8060CC3TR28	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N28IB	-	BL8060CC3BTR28	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N29B	-	FC61N292PG	Vdet-IC	2.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N29B	-	ML61N292P	Vdet-IC	2.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N29I	-	BL8060CC3TR29	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N29IB	-	BL8060CC3BTR29	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N3	-	TC54VN3302MB	Vdet-IC	3.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
N30B	-	FC61N302PG	Vdet-IC	3.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N30B	-	ML61N302P	Vdet-IC	3.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N30I	-	BL8060CC3TR30	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N30IB	-	BL8060CC3BTR30	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N31B	-	FC61N312PG	Vdet-IC	3.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N31B	-	ML61N312P	Vdet-IC	3.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N31I	-	BL8060CC3TR31	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N31IB	-	BL8060CC3BTR31	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N32B	-	FC61N322PG	Vdet-IC	3.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N32B	-	ML61N322P	Vdet-IC	3.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N32I	-	BL8060CC3TR32	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N32IB	-	BL8060CC3BTR32	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N33	-	XC61CN3302P	Vdet-IC	3.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
N33	-	XE61CN3345PR	Vdet-IC	3.3V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
N33B	-	FC61N332PG	Vdet-IC	3.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N33B	-	ML61N332P	Vdet-IC	3.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N33I	-	BL8060CC3TR33	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N33IB	-	BL8060CC3BTR33	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N34B	-	FC61N342PG	Vdet-IC	3.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N34B	-	ML61N342P	Vdet-IC	3.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N34I	-	BL8060CC3TR34	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N34IB	-	BL8060CC3BTR34	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N35	-	LN61FN3312P	Vdet-IC	3.3V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
N35	-	XC61FN3312P	Vdet-IC	3.3V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
N35B	-	FC61N352PG	Vdet-IC	3.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N35B	-	ML61N352P	Vdet-IC	3.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N35I	-	BL8060CC3TR35	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N35IB	-	BL8060CC3BTR35	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N36	-	LN61FN3342P	Vdet-IC	3.3V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
N36	-	XC61FN3342P	Vdet-IC	3.3V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
N36B	-	FC61N362PG	Vdet-IC	3.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N36B	-	ML61N362P	Vdet-IC	3.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N36I	-	BL8060CC3TR36	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N36IB	-	BL8060CC3BTR36	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N37	-	LN61FN3352P	Vdet-IC	3.3V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
N37	-	XC61FN3352P	Vdet-IC	3.3V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
N37B	-	FC61N372PG	Vdet-IC	3.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N37B	-	ML61N372P	Vdet-IC	3.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N37I	-	BL8060CC3TR37	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N37IB	-	BL8060CC3BTR37	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N38B	-	FC61N382PG	Vdet-IC	3.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N38B	-	ML61N382P	Vdet-IC	3.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N38I	-	BL8060CC3TR38	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N38IB	-	BL8060CC3BTR38	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N39B	-	FC61N392PG	Vdet-IC	3.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N39B	-	ML61N392P	Vdet-IC	3.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N39I	-	BL8060CC3TR39	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N39IB	-	BL8060CC3BTR39	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N4	-	BFQ540	Si-npn	RF, 25V, 120mA, 1.2W, B=100..250, 9GHz	SOT-89	20tb	-	4g	Phi
N4	-	TC54VN3402MB	Vdet-IC	3.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
N40B	-	FC61N402PG	Vdet-IC	4.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N40B	-	ML61N402P	Vdet-IC	4.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N40I	-	BL8060CC3TR40	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N40IB	-	BL8060CC3BTR40	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N41B	-	FC61N412PG	Vdet-IC	4.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N41B	-	ML61N412P	Vdet-IC	4.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N41I	-	BL8060CC3TR41	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N41IB	-	BL8060CC3BTR41	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N42B	-	FC61N422PG	Vdet-IC	4.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N42B	-	ML61N422P	Vdet-IC	4.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N42I	-	BL8060CC3TR42	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N42IB	-	BL8060CC3BTR42	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N43	-	XC61CN3402P	Vdet-IC	3.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
N43	-	XE61CN3445PR	Vdet-IC	3.4V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
N43B	-	FC61N432PG	Vdet-IC	4.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N43B	-	ML61N432P	Vdet-IC	4.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N43I	-	BL8060CC3TR43	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N43IB	-	BL8060CC3BTR43	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N44B	-	FC61N442PG	Vdet-IC	4.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N44B	-	ML61N442P	Vdet-IC	4.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N44I	-	BL8060CC3TR44	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N44IB	-	BL8060CC3BTR44	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N45	-	LN61FN3412P	Vdet-IC	3.4V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
N45	-	XC61FN3412P	Vdet-IC	3.4V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
N45B	-	FC61N452PG	Vdet-IC	4.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N45B	-	ML61N452P	Vdet-IC	4.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N45I	-	BL8060CC3TR45	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N45IB	-	BL8060CC3BTR45	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N46	-	LN61FN3442P	Vdet-IC	3.4V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
N46	-	XC61FN3442P	Vdet-IC	3.4V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
N46B	-	FC61N462PG	Vdet-IC	4.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N46B	-	ML61N462P	Vdet-IC	4.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N46I	-	BL8060CC3TR46	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N46IB	-	BL8060CC3BTR46	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N47	-	LN61FN3452P	Vdet-IC	3.4V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
N47	-	XC61FN3452P	Vdet-IC	3.4V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
N47B	-	FC61N472PG	Vdet-IC	4.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N47B	-	ML61N472P	Vdet-IC	4.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N47I	-	BL8060CC3TR47	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N47IB	-	BL8060CC3BTR47	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N48B	-	FC61N482PG	Vdet-IC	4.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N48B	-	ML61N482P	Vdet-IC	4.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N48I	-	BL8060CC3TR48	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N48IB	-	BL8060CC3BTR48	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N49B	-	FC61N492PG	Vdet-IC	4.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N49B	-	ML61N492P	Vdet-IC	4.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N49I	-	BL8060CC3TR49	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N49IB	-	BL8060CC3BTR49	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N4A	-	S-1131B15UA-N4A-TF	LVR-IC	LDO, 1.5V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4B	-	S-1131B16UA-N4B-TF	LVR-IC	LDO, 1.6V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4C	-	S-1131B17UA-N4C-TF	LVR-IC	LDO, 1.7V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4D	-	S-1131B18UA-N4D-TF	LVR-IC	LDO, 1.8V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4E	-	S-1131B19UA-N4E-TF	LVR-IC	LDO, 1.9V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4F	-	S-1131B20UA-N4F-TF	LVR-IC	LDO, 2.0V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4G	-	S-1131B21UA-N4G-TF	LVR-IC	LDO, 2.1V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4H	-	S-1131B22UA-N4H-TF	LVR-IC	LDO, 2.2V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4I	-	S-1131B23UA-N4I-TF	LVR-IC	LDO, 2.3V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4J	-	S-1131B24UA-N4J-TF	LVR-IC	LDO, 2.4V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4K	-	S-1131B25UA-N4K-TF	LVR-IC	LDO, 2.5V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4L	-	S-1131B26UA-N4L-TF	LVR-IC	LDO, 2.6V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4M	-	S-1131B27UA-N4M-TF	LVR-IC	LDO, 2.7V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4N	-	S-1131B28UA-N4N-TF	LVR-IC	LDO, 2.8V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4O	-	S-1131B29UA-N4O-TF	LVR-IC	LDO, 2.9V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4P	-	S-1131B30UA-N4P-TF	LVR-IC	LDO, 3.0V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4Q	-	S-1131B31UA-N4Q-TF	LVR-IC	LDO, 3.1V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4R	-	S-1131B32UA-N4R-TF	LVR-IC	LDO, 3.2V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4S	-	S-1131B33UA-N4S-TF	LVR-IC	LDO, 3.3V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4T	-	S-1131B34UA-N4T-TF	LVR-IC	LDO, 3.4V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4U	-	S-1131B35UA-N4U-TF	LVR-IC	LDO, 3.5V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4V	-	S-1131B36UA-N4V-TF	LVR-IC	LDO, 3.6V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4W	-	S-1131B37UA-N4W-TF	LVR-IC	LDO, 3.7V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4X	-	S-1131B38UA-N4X-TF	LVR-IC	LDO, 3.8V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4Y	-	S-1131B39UA-N4Y-TF	LVR-IC	LDO, 3.9V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N4Z	-	S-1131B40UA-N4Z-TF	LVR-IC	LDO, 4.0V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N5	-	TC54VN3502MB	Vdet-IC	3.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
N50B	-	FC61N502PG	Vdet-IC	5.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N50B	-	ML61N502P	Vdet-IC	5.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N50I	-	BL8060CC3TR50	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N50IB	-	BL8060CC3BTR50	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N51B	-	FC61N512PG	Vdet-IC	5.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N51B	-	ML61N512P	Vdet-IC	5.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N51I	-	BL8060CC3TR51	LVR-IC	LDO, 5.1V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N51IB	-	BL8060CC3BTR51	LVR-IC	LDO, 5.1V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N52B	-	FC61N522PG	Vdet-IC	5.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N52B	-	ML61N522P	Vdet-IC	5.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N52I	-	BL8060CC3TR52	LVR-IC	LDO, 5.2V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N52IB	-	BL8060CC3BTR52	LVR-IC	LDO, 5.2V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N53	-	XC61CN3502P	Vdet-IC	3.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
N53	-	XE61CN3545PR	Vdet-IC	3.5V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
N53B	-	FC61N532PG	Vdet-IC	5.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N53B	-	ML61N532P	Vdet-IC	5.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N53I	-	BL8060CC3TR53	LVR-IC	LDO, 5.3V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N53IB	-	BL8060CC3BTR53	LVR-IC	LDO, 5.3V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N54B	-	FC61N542PG	Vdet-IC	5.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N54B	-	ML61N542P	Vdet-IC	5.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N54I	-	BL8060CC3TR54	LVR-IC	LDO, 5.4V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N54IB	-	BL8060CC3BTR54	LVR-IC	LDO, 5.4V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N55	-	LN61FN3512P	Vdet-IC	3.5V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
N55	-	XC61FN3512P	Vdet-IC	3.5V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
N55B	-	FC61N552PG	Vdet-IC	5.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N55B	-	ML61N552P	Vdet-IC	5.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N55I	-	BL8060CC3TR55	LVR-IC	LDO, 5.5V±2%, 300mA	SOT-89	20vl	VR1	4bb	Shb
N55IB	-	BL8060CC3BTR55	LVR-IC	LDO, 5.5V±2%, 300mA	SOT-89	20ch	VR1	4bb	Shb
N56	-	LN61FN3542P	Vdet-IC	3.5V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
N56	-	XC61FN3542P	Vdet-IC	3.5V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
N56B	-	FC61N562PG	Vdet-IC	5.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N56B	-	ML61N562P	Vdet-IC	5.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N57	-	LN61FN3552P	Vdet-IC	3.5V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
N57	-	XC61FN3552P	Vdet-IC	3.5V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N57B	-	FC61N572PG	Vdet-IC	5.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N57B	-	ML61N572P	Vdet-IC	5.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N58	-	FCX458	Si-npn	Sw, 400V, 225mA, 1W, B=200..300, >50MHz	SOT-89	20tb	-	4b	Zx
N58B	-	FC61N582PG	Vdet-IC	5.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N58B	-	ML61N582P	Vdet-IC	5.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N59B	-	FC61N592PG	Vdet-IC	5.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N59B	-	ML61N592P	Vdet-IC	5.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N5A	-	S-1131B41UA-N5A-TF	LVR-IC	LDO, 4.1V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N5B	-	S-1131B42UA-N5B-TF	LVR-IC	LDO, 4.2V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N5C	-	S-1131B43UA-N5C-TF	LVR-IC	LDO, 4.3V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N5D	-	S-1131B44UA-N5D-TF	LVR-IC	LDO, 4.4V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N5E	-	LN6214P15P	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N5E	-	S-1131B45UA-N5E-TF	LVR-IC	LDO, 4.5V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N5F	-	LN6214P16P	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N5F	-	S-1131B46UA-N5F-TF	LVR-IC	LDO, 4.6V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N5G	-	S-1131B47UA-N5G-TF	LVR-IC	LDO, 4.7V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N5H	-	LN6214P17P	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N5H	-	S-1131B48UA-N5H-TF	LVR-IC	LDO, 4.8V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N5I	-	S-1131B49UA-N5I-TF	LVR-IC	LDO, 4.9V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N5J	-	S-1131B50UA-N5J-TF	LVR-IC	LDO, 5.0V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N5K	-	LN6214P18P	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N5K	-	S-1131B51UA-N5K-TF	LVR-IC	LDO, 5.1V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N5L	-	LN6214P19P	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N5L	-	S-1131B52UA-N5L-TF	LVR-IC	LDO, 5.2V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N5M	-	LN6214P20P	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N5M	-	S-1131B53UA-N5M-TF	LVR-IC	LDO, 5.3V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N5N	-	LN6214P21P	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N5N	-	S-1131B54UA-N5N-TF	LVR-IC	LDO, 5.4V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N5O	-	S-1131B55UA-N5O-TF	LVR-IC	LDO, 5.5V±1%, 300mA	SOT-89	20ch	VR1	4b	Sii
N5P	-	LN6214P22P	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N5R	-	LN6214P23P	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N5S	-	LN6214P24P	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N5T	-	LN6214P25P	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N5U	-	LN6214P26P	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N5V	-	LN6214P27P	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N5X	-	LN6214P28P	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N5Y	-	LN6214P29P	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N5Z	-	LN6214P30P	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6	-	TC54VN3602MB	Vdet-IC	3.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
N60	-	LN6214P31P	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N60B	-	FC61N602PG	Vdet-IC	6.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N60B	-	ML61N602P	Vdet-IC	6.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N61	-	LN6214P32P	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N61B	-	FC61N612PG	Vdet-IC	6.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N61B	-	ML61N612P	Vdet-IC	6.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N62	-	LN6214P33P	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N62B	-	FC61N622PG	Vdet-IC	6.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N62B	-	ML61N622P	Vdet-IC	6.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N63	-	LN6214P34P	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N63	-	XC61CN3602P	Vdet-IC	3.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
N63	-	XE61CN3645PR	Vdet-IC	3.6V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
N63B	-	FC61N632PG	Vdet-IC	6.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N63B	-	ML61N632P	Vdet-IC	6.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N64	-	LN6214P35P	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N64B	-	FC61N642PG	Vdet-IC	6.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N64B	-	ML61N642P	Vdet-IC	6.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N65	-	LN61FN3612P	Vdet-IC	3.6V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
N65	-	LN6214P36P	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N65	-	XC61FN3612P	Vdet-IC	3.6V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
N65B	-	FC61N652PG	Vdet-IC	6.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N65B	-	ML61N652P	Vdet-IC	6.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N66	-	LN61FN3642P	Vdet-IC	3.6V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
N66	-	LN6214P37P	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N66	-	XC61FN3642P	Vdet-IC	3.6V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
N66B	-	FC61N662PG	Vdet-IC	6.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N66B	-	ML61N662P	Vdet-IC	6.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N67	-	LN61FN3652P	Vdet-IC	3.6V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
N67	-	LN6214P38P	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N67	-	XC61FN3652P	Vdet-IC	3.6V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
N67B	-	FC61N672PG	Vdet-IC	6.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N67B	-	ML61N672P	Vdet-IC	6.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N68	-	LN6214P39P	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N68B	-	FC61N682PG	Vdet-IC	6.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N68B	-	ML61N682P	Vdet-IC	6.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N69	-	LN6214P40P	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N69B	-	FC61N692PG	Vdet-IC	6.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N69B	-	ML61N692P	Vdet-IC	6.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N6A	-	LN6214P41P	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6B	-	LN6214P42P	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6C	-	LN6214P43P	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6D	-	LN6214P44P	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6E	-	LN6214P45P	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6F	-	LN6214P46P	LVR-IC	LDO, 4.6V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6H	-	LN6214P47P	LVR-IC	LDO, 4.7V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6K	-	LN6214P48P	LVR-IC	LDO, 4.8V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6L	-	LN6214P49P	LVR-IC	LDO, 4.9V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6M	-	LN6214P50P	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6N	-	LN6214P51P	LVR-IC	LDO, 5.1V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6P	-	LN6214P52P	LVR-IC	LDO, 5.2V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6R	-	LN6214P53P	LVR-IC	LDO, 5.3V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6S	-	LN6214P54P	LVR-IC	LDO, 5.4V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6T	-	LN6214P55P	LVR-IC	LDO, 5.5V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6U	-	LN6214P56P	LVR-IC	LDO, 5.6V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6V	-	LN6214P57P	LVR-IC	LDO, 5.7V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6X	-	LN6214P58P	LVR-IC	LDO, 5.8V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6Y	-	LN6214P59P	LVR-IC	LDO, 5.9V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N6Z	-	LN6214P60P	LVR-IC	LDO, 6.0V±2%, 500mA	SOT-89	20vl	VR1	4z	Nln
N7	-	TC54VN3702MB	Vdet-IC	3.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
N70B	-	FC61N702PG	Vdet-IC	7.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Fis
N70B	-	ML61N702P	Vdet-IC	7.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4g	Mlc
N73	-	XC61CN3702P	Vdet-IC	3.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
N73	-	XE61CN3745PR	Vdet-IC	3.7V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
N75	-	LN61FN3712P	Vdet-IC	3.7V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
N75	-	XC61FN3712P	Vdet-IC	3.7V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
N76	-	LN61FN3742P	Vdet-IC	3.7V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
N76	-	XC61FN3742P	Vdet-IC	3.7V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
N77	-	LN61FN3752P	Vdet-IC	3.7V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
N77	-	XC61FN3752P	Vdet-IC	3.7V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
N8	-	TC54VN3802MB	Vdet-IC	3.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
N83	-	XC61CN3802P	Vdet-IC	3.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
N83	-	XE61CN3845PR	Vdet-IC	3.8V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
N85	-	LN61FN3812P	Vdet-IC	3.8V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
N85	-	XC61FN3812P	Vdet-IC	3.8V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
N86	-	LN61FN3842P	Vdet-IC	3.8V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
N86	-	XC61FN3842P	Vdet-IC	3.8V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
N87	-	LN61FN3852P	Vdet-IC	3.8V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
N87	-	XC61FN3852P	Vdet-IC	3.8V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
N9	-	TC54VN3902MB	Vdet-IC	3.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
N93	-	FCX493	Si-npn	Dr/Out, 120, 1A, 1W, B=100..300, >150MHz	SOT-89	20tb	-	4b	Zx
N93	-	XC61CN3902P	Vdet-IC	3.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
N93	-	XE61CN3945PR	Vdet-IC	3.9V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
N95	-	FCX495	Si-npn	Dr/Out, 170V, 1A, 1W, B=100..300, >100MHz	SOT-89	20tb	-	4b	Zx
N95	-	LN61FN3912P	Vdet-IC	3.9V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
N95	-	XC61FN3912P	Vdet-IC	3.9V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
N96	-	LN61FN3942P	Vdet-IC	3.9V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
N96	-	XC61FN3942P	Vdet-IC	3.9V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
N97	-	LN61FN3952P	Vdet-IC	3.9V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
N97	-	XC61FN3952P	Vdet-IC	3.9V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
NA	-	2SK1273	n-MOSFET	Sw, 60V, ±2A, 2W, Rds=0.31Ω(0.5A), 15/30ns	SOT-89	20fi	-	4g	Nec
NA1	-	2SK2053	n-MOSFET	V-MOS, LogL, 16V, ±5A, <0.12Ω(2.5A)	SOT-89	20fa	-	4b	Nec
NA2	-	2SK2054	n-MOSFET	V-MOS, LogL, 60V, ±3A, <0.2Ω(1.5A)	SOT-89	20fa	-	4b	Nec
NA3	-	2SK2055	n-MOSFET	V-MOS, LogL, 100V, ±2A, <0.35Ω(5A)	SOT-89	20fa	-	4b	Nec
NA4	-	2SK2157	n-MOSFET	V-MOS, LogL, 30V, ±5A, <0.1Ω(2.5A)	SOT-89	20fa	-	4b	Nec
NB	-	2SK1483	n-MOSFET	LogL, Sw, 30V, ±2A, 2W, 0.4Ω (0.5A), 65/660ns	SOT-89	20fi	-	4g	Nec
NC	-	2SK1485	n-MOSFET	LogL, Sw, 100V, ±1A, 2W, 0.5Ω (0.5A), 28/435ns	SOT-89	20fi	-	4g	Nec
ND	-	2SK1583	n-MOSFET	V-MOS, LogL, 16V, ±0.5A, <1.5Ω	SOT-89	20fa	-	4b	Nec
NE	-	2SK1585	n-MOSFET	V-MOS, LogL, 16V, ±1A <1Ω(0.5A)	SOT-89	20fa	-	4b	Nec
NE	-	RTGN432P	Si-npn-Digi+Z-Di	Drv, 60V, 1A, 500mW, B>200, R1/R2=4.7k/10k	SOT-89	20tb	-	4a	Ish
NF	-	2SK1587	n-MOSFET	V-MOS, LogL, 16V, ±2A, <0.5Ω(1A)	SOT-89	20fa	-	4b	Nec
NG	-	2SK1588	n-MOSFET	V-MOS, LogL, 16V, ±3A, <0.3Ω(1A)	SOT-89	20fa	-	4b	Nec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NH	-	2SK1584	n-MOSFET	V-MOS, LogL, 30V, ±0.5A, <1.5Ω	SOT-89	20fa	-	4b	Nec
NI	-	2SK1586	n-MOSFET	V-MOS, LogL, 30V, ±1A <0.6Ω(0.5A)	SOT-89	20fa	-	4b	Nec
NK	-	2SC2780-K	Si-npn	AF-Amp, 140V, 50mA, 2W, 120MHz, B=200..400	SOT-89	20tb	-	4b	Nec
NL	-	2SC2780-L	Si-npn	AF-Amp, 140V, 50mA, 2W, 120MHz, B=135..270	SOT-89	20tb	-	4b	Nec
NM	-	2SC2780-M	Si-npn	AF-Amp, 140V, 50mA, 2W, 120MHz, B=90..180	SOT-89	20tb	-	4b	Nec
NO	-	2SA1213-O	Si-pnp	GP, 50V, 2A, 500mW, B=70..140, 100MHz	SOT-89	20tb	-	4b	Tos
NO	-	2SA1213PT-O	Si-pnp	GP, 50V, 2A, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4g	Chm
NO	-	2SK1592	n-MOSFET	V-MOS, LogL, 60V, ±0.5A, <2Ω(0.5A)	SOT-89	20fa	-	4b	Nec
NP	-	2SK1593	n-MOSFET	V-MOS, LogL, 100V, ±0.5A, <5Ω(0.5A)	SOT-89	20fa	-	4b	Nec
NQ	-	2SK1959	n-MOSFET	V-MOS, LogL, 16V, ±2A, <0.5Ω(5A)	SOT-89	20fa	-	4b	Nec
NR	-	2SK1960	n-MOSFET	V-MOS, LogL, 16V, ±3A, <0.2Ω(1.5A)	SOT-89	20fa	-	4b	Nec
NS	-	2SK2109	n-MOSFET	V-MOS, LogL, 60V,±0.5A,<0.8Ω(0.5A)	SOT-89	20fa	-	4b	Nec
NT	-	2SK2110	n-MOSFET	V-MOS, LogL, 100V,±0.5A,<1.2Ω(0.5A)	SOT-89	20fa	-	4b	Nec
NU	-	2SK2111	n-MOSFET	V-MOS, LogL, 60V, ±1A<0.45Ω(0.5A)	SOT-89	20fa	-	4b	Nec
NV	-	2SK2112	n-MOSFET	V-MOS, LogL, 100V, ±1A<0.8Ω(0.5A)	SOT-89	20fa	-	4b	Nec
NW	-	2SK2159	n-MOSFET	V-MOS, LogL, 60V, ±2A, <0.3Ω(2.5A)	SOT-89	20fa	-	4b	Nec
NX	-	2SK2857	n-MOSFET	V-MOS, LogL, 60V, ±4A, <0.22Ω	SOT-89	20fa	-	4b	Nec
NY	-	2SA1213PT-Y	Si-pnp	GP, 50V, 2A, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4g	Chm
NY	-	2SA1213-Y	Si-pnp	GP, 50V, 2A, 500mW, B=120..280, 100MHz	SOT-89	20tb	-	4b	Tos
NY	-	2SB1188PT-Q	Si-pnp	AF, Sw, 32V, 2A, B=120..270, 100MHz	SOT-89	20tb	-	4g	Chm
NY	-	2SJ317	p-MOSFET	V-MOS, LogL, 12V, ±2A, <0.7Ω(0.5A), integr, Rgate	SOT-89	20fa	-	4b	Ren
O	-	2SK601	n-MOSFET	V-MOS, Sw, 80V, ±0.5A, 1W, <4Ω, 15/20ns	SOT-89	20fa	-	4b	Pan
OA09C	-	LC9006CC3TR09C	Vdet-IC	0.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA09N	-	LC9006CC3TR09N	Vdet-IC	0.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA10C	-	LC9006CC3TR10C	Vdet-IC	1.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA10N	-	LC9006CC3TR10N	Vdet-IC	1.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA11C	-	LC9006CC3TR11C	Vdet-IC	1.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA11N	-	LC9006CC3TR11N	Vdet-IC	1.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA12C	-	LC9006CC3TR12C	Vdet-IC	1.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA12N	-	LC9006CC3TR12N	Vdet-IC	1.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA13C	-	LC9006CC3TR13C	Vdet-IC	1.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA13N	-	LC9006CC3TR13N	Vdet-IC	1.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA14C	-	LC9006CC3TR14C	Vdet-IC	1.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA14N	-	LC9006CC3TR14N	Vdet-IC	1.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA15C	-	LC9006CC3TR15C	Vdet-IC	1.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA15N	-	LC9006CC3TR15N	Vdet-IC	1.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA16C	-	LC9006CC3TR16C	Vdet-IC	1.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA16N	-	LC9006CC3TR16N	Vdet-IC	1.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA17C	-	LC9006CC3TR17C	Vdet-IC	1.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA17N	-	LC9006CC3TR17N	Vdet-IC	1.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA18C	-	LC9006CC3TR18C	Vdet-IC	1.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA18N	-	LC9006CC3TR18N	Vdet-IC	1.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA19C	-	LC9006CC3TR19C	Vdet-IC	1.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA19N	-	LC9006CC3TR19N	Vdet-IC	1.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA20C	-	LC9006CC3TR20C	Vdet-IC	2.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA20N	-	LC9006CC3TR20N	Vdet-IC	2.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA21C	-	LC9006CC3TR21C	Vdet-IC	2.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA21N	-	LC9006CC3TR21N	Vdet-IC	2.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA22C	-	LC9006CC3TR22C	Vdet-IC	2.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA22N	-	LC9006CC3TR22N	Vdet-IC	2.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA23C	-	LC9006CC3TR23C	Vdet-IC	2.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA23N	-	LC9006CC3TR23N	Vdet-IC	2.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA24C	-	LC9006CC3TR24C	Vdet-IC	2.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA24N	-	LC9006CC3TR24N	Vdet-IC	2.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA25C	-	LC9006CC3TR25C	Vdet-IC	2.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA25N	-	LC9006CC3TR25N	Vdet-IC	2.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA26C	-	LC9006CC3TR26C	Vdet-IC	2.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA26N	-	LC9006CC3TR26N	Vdet-IC	2.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA27C	-	LC9006CC3TR27C	Vdet-IC	2.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA27N	-	LC9006CC3TR27N	Vdet-IC	2.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA28C	-	LC9006CC3TR28C	Vdet-IC	2.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA28N	-	LC9006CC3TR28N	Vdet-IC	2.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA29C	-	LC9006CC3TR29C	Vdet-IC	2.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA29N	-	LC9006CC3TR29N	Vdet-IC	2.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA30C	-	LC9006CC3TR30C	Vdet-IC	3.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA30N	-	LC9006CC3TR30N	Vdet-IC	3.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA31C	-	LC9006CC3TR31C	Vdet-IC	3.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA31N	-	LC9006CC3TR31N	Vdet-IC	3.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA32C	-	LC9006CC3TR32C	Vdet-IC	3.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA32N	-	LC9006CC3TR32N	Vdet-IC	3.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
OA33C	-	LC9006CC3TR33C	Vdet-IC	3.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA33N	-	LC9006CC3TR33N	Vdet-IC	3.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA34C	-	LC9006CC3TR34C	Vdet-IC	3.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA34N	-	LC9006CC3TR34N	Vdet-IC	3.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA35C	-	LC9006CC3TR35C	Vdet-IC	3.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA35N	-	LC9006CC3TR35N	Vdet-IC	3.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA36C	-	LC9006CC3TR36C	Vdet-IC	3.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA36N	-	LC9006CC3TR36N	Vdet-IC	3.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA37C	-	LC9006CC3TR37C	Vdet-IC	3.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA37N	-	LC9006CC3TR37N	Vdet-IC	3.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA38C	-	LC9006CC3TR38C	Vdet-IC	3.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA38N	-	LC9006CC3TR38N	Vdet-IC	3.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA39C	-	LC9006CC3TR39C	Vdet-IC	3.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA39N	-	LC9006CC3TR39N	Vdet-IC	3.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA40C	-	LC9006CC3TR40C	Vdet-IC	4.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA40N	-	LC9006CC3TR40N	Vdet-IC	4.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA41C	-	LC9006CC3TR41C	Vdet-IC	4.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA41N	-	LC9006CC3TR41N	Vdet-IC	4.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA42C	-	LC9006CC3TR42C	Vdet-IC	4.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA42N	-	LC9006CC3TR42N	Vdet-IC	4.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA43C	-	LC9006CC3TR43C	Vdet-IC	4.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA43N	-	LC9006CC3TR43N	Vdet-IC	4.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA44C	-	LC9006CC3TR44C	Vdet-IC	4.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA44N	-	LC9006CC3TR44N	Vdet-IC	4.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA45C	-	LC9006CC3TR45C	Vdet-IC	4.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA45N	-	LC9006CC3TR45N	Vdet-IC	4.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA46C	-	LC9006CC3TR46C	Vdet-IC	4.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA46N	-	LC9006CC3TR46N	Vdet-IC	4.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA47C	-	LC9006CC3TR47C	Vdet-IC	4.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA47N	-	LC9006CC3TR47N	Vdet-IC	4.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA48C	-	LC9006CC3TR48C	Vdet-IC	4.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA48N	-	LC9006CC3TR48N	Vdet-IC	4.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA49C	-	LC9006CC3TR49C	Vdet-IC	4.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA49N	-	LC9006CC3TR49N	Vdet-IC	4.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA50C	-	LC9006CC3TR50C	Vdet-IC	5.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA50N	-	LC9006CC3TR50N	Vdet-IC	5.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA51C	-	LC9006CC3TR51C	Vdet-IC	5.1V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA51N	-	LC9006CC3TR51N	Vdet-IC	5.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA52C	-	LC9006CC3TR52C	Vdet-IC	5.2V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA52N	-	LC9006CC3TR52N	Vdet-IC	5.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA53C	-	LC9006CC3TR53C	Vdet-IC	5.3V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA53N	-	LC9006CC3TR53N	Vdet-IC	5.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA54C	-	LC9006CC3TR54C	Vdet-IC	5.4V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA54N	-	LC9006CC3TR54N	Vdet-IC	5.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA55C	-	LC9006CC3TR55C	Vdet-IC	5.5V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA55N	-	LC9006CC3TR55N	Vdet-IC	5.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA56C	-	LC9006CC3TR56C	Vdet-IC	5.6V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA56N	-	LC9006CC3TR56N	Vdet-IC	5.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA57C	-	LC9006CC3TR57C	Vdet-IC	5.7V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA57N	-	LC9006CC3TR57N	Vdet-IC	5.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA58C	-	LC9006CC3TR58C	Vdet-IC	5.8V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA58N	-	LC9006CC3TR58N	Vdet-IC	5.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA59C	-	LC9006CC3TR59C	Vdet-IC	5.9V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA59N	-	LC9006CC3TR59N	Vdet-IC	5.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OA60C	-	LC9006CC3TR60C	Vdet-IC	6.0V±2%, -Reset PPO	SOT-89	20vda	VD7	4oa	Lch
OA60N	-	LC9006CC3TR60N	Vdet-IC	6.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4oa	Lch
OD	-	MC78LC40HT1	LVR-IC	Low Iq, 4V±2.5%, 80mA	SOT-89	20vl	VR1	4b	Ons
OE	-	MC78LC50HT1	LVR-IC	Low Iq, 5V±2.5%, 80mA	SOT-89	20vl	VR1	4b	Ons
OK	-	2SC3736-K	Si-npn	Sw, 60V, 1A, 2W, B=60..120, >300MHz	SOT-89	20tb	-	4b	Nec
OL	-	2SC3736-L	Si-npn	Sw, 60V, 1A, 2W, B=100..200, >300MHz	SOT-89	20tb	-	4b	Nec
P0	-	ELM9720CAB	Vdet-IC	2.0V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
P0	-	TC54VN4002MB	Vdet-IC	4.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
P01	-	ZXTP5401Z	Si-pnp	Sw, HV, 160V, 600mA, 1.5W, B=60..240, 100MHz	SOT-89	20tb	-	4i	Zx
P03	-	XC61CN4002P	Vdet-IC	4.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
P03	-	XE61CN4045PR	Vdet-IC	4.0V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
P05	-	LN61FN4012P	Vdet-IC	4.0V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
P05	-	XC61FN4012P	Vdet-IC	4.0V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
P06	-	LN61FN4042P	Vdet-IC	4.0V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
P06	-	XC61FN4042P	Vdet-IC	4.0V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
P07	-	LN61FN4052P	Vdet-IC	4.0V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P07	-	XC61FN4052P	Vdet-IC	4.0V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
P1	-	D70Y.8T1	Si-npn	AF, 35V, 800mA, 500mW, B=70..240	SOT-89	20tb	-	4b	Gen
P1	-	ELM9721CAB	Vdet-IC	2.1V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
P1	-	FCX591	Si-pnp	Dr/Out, 80V, 1A, 1W, B=100..300, >150MHz	SOT-89	20tb	-	4b	Zx
P1	-	RT1P137P	Si-pnp-Digi	Sw, 40V, 1A, 500mW, 150MHz, R1/R2=1k/22k	SOT-89	20tb	-	4a	Mit
P1	-	SGA-9189	MMIC	Si/Ge RF amplifier, DC..3GHz, 13.2dB (50Ω)	SOT-89	20aa	A1	4b	Sir
P1	-	TC54VN4102MB	Vdet-IC	4.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
P1188	-	2SB1188PT-P	Si-pnp	AF, Sw, 32V, 2A, B=82..180, 100MHz	SOT-89	20tb	-	4g	Chm
P12BS	-	2DB1119S	Si-pnp	AF, Sw, 25V, 1A, 1W, B=140..280, 200MHz	SOT-89	20tb	-	4m	Di
P13	-	XC61CN4102P	Vdet-IC	4.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
P13	-	XE61CN4145PR	Vdet-IC	4.1V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
P13P	-	2DB1132P	Si-pnp	AF, Sw, 40V, 1A, 1W, B=82..180, 190MHz	SOT-89	20tb	-	4m	Di
P13Q	-	2DB1132Q	Si-pnp	AF, Sw, 40V, 1A, 1W, B=120..270, 190MHz	SOT-89	20tb	-	4m	Di
P13R	-	2DB1132R	Si-pnp	AF, Sw, 40V, 1A, 1W, B=180..390, 190MHz	SOT-89	20tb	-	4m	Di
P15	-	LN61FN4112P	Vdet-IC	4.1V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
P15	-	XC61FN4112P	Vdet-IC	4.1V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
P16	-	LN61FN4142P	Vdet-IC	4.1V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
P16	-	XC61FN4142P	Vdet-IC	4.1V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
P17	-	LN61FN4152P	Vdet-IC	4.1V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
P17	-	XC61FN4152P	Vdet-IC	4.1V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
p1A	-	PXT3904	Si-npn	Sw, 60V, 100mA, 1.2W, B=100..300, >300MHz	SOT-89	20tb	-	4b	Phi
p1B	-	PXT2222	Si-npn	GP, 60V, 600mA, 1.25W, B=100..300, >300MHz	SOT-89	20tb	-	4b	Phi
p1D	-	PXTA42	Si-npn	Vid, 300/300V, 200mA, 350mW, B>25, >50MHz	SOT-89	20tb	-	4b	Phi
p1E	-	PXTA43	Si-npn	Vid, 200/200V, 200mA, 350mW, B>25, >50MHz	SOT-89	20tb	-	4b	Phi
p1M	-	PXTA13	Si-npn-Darl	GP, 30V, 300mA, 300mW, B>5000, >125MHz	SOT-89	20tb	-	4b	Phi
p1N	-	PXTA14	Si-npn-Darl	GP, 30V, 500mA, 1.3W, B>10000, >125MHz	SOT-89	20tb	-	4b	Phi
p1P	-	PXT2222A	Si-npn	GP, 75V, 600mA, 1.25W, B=100..300, >300MHz	SOT-89	20tb	-	4b	Phi
P2	-	D70Y.8T1	Si-npn	AF, 35V, 800mA, 500mW, B=70..140	SOT-89	20tb	-	4b	Gen
P2	-	ELM9722CAB	Vdet-IC	2.2V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
P2	-	FCX591A	Si-pnp	Dr/Out, 40V, 1A, 1W, B=300..800, >150MHz	SOT-89	20tb	-	4g	Zx
P2	-	TC54VN4202MB	Vdet-IC	4.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
P23	-	XC61CN4202P	Vdet-IC	4.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
P23	-	XE61CN4245PR	Vdet-IC	4.2V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
P23P	-	2DB1188P	Si-pnp	AF, Sw, 40V, 2A, 1W, B=82..180, 120MHz	SOT-89	20tb	-	4m	Di
P23Q	-	2DB1188Q	Si-pnp	AF, Sw, 40V, 2A, 1W, B=120..270, 120MHz	SOT-89	20tb	-	4m	Di
P23R	-	2DB1188R	Si-pnp	AF, Sw, 40V, 2A, 1W, B=180..390, 120MHz	SOT-89	20tb	-	4m	Di
P25	-	LN61FN4212P	Vdet-IC	4.2V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
P25	-	XC61FN4212P	Vdet-IC	4.2V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
P25X	-	2DA1213O	Si-pnp	AF, Sw, 50V, 2A, 1W, B=70..140, 160MHz	SOT-89	20tb	-	4m	Di
P25Y	-	2DA1213Y	Si-pnp	AF, Sw, 50V, 2A, 1W, B=120..240, 160MHz	SOT-89	20tb	-	4m	Di
P26	-	LN61FN4242P	Vdet-IC	4.2V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
P26	-	XC61FN4242P	Vdet-IC	4.2V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
P27	-	LN61FN4252P	Vdet-IC	4.2V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
P27	-	XC61FN4252P	Vdet-IC	4.2V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
p2A	-	PXT3906	Si-pnp	Sw, 40V, 100mA, 1.2W, B=100..300, >250MHz	SOT-89	20tb	-	4b	Phi
p2B	-	PXT2907	Si-pnp	GP, 40V, 600mA, 1.3W, B=100..300, >200MHz	SOT-89	20tb	-	4b	Phi
p2D	-	PXTA92	Si-pnp	Vid, 300/300V, 500mA, 330mW, B=25, >50MHz	SOT-89	20tb	-	4b	Phi
p2E	-	PXTA93	Si-pnp	Vid, 200/200V, 500mA, 330mW, B=25, >50MHz	SOT-89	20tb	-	4b	Phi
p2F	-	PXT2907A	Si-pnp	GP, 60V, 600mA, 1.3W, B=100..300, >200MHz	SOT-89	20tb	-	4b	Phi
p2F	-	WTM2907A	Si-pnp	GP, 60V, 600mA, 1.2W, B=100..300, >200MHz	SOT-89	20tb	-	4b	Wtr
p2T	-	PXT4403	Si-pnp	Sw, 40V, 600mA, 1.3W, B=30..30, >200MHz	SOT-89	20tb	-	4b	Phi
p2V	-	PXTA64	Si-pnp-Darl	GP, AF, 30V, 500mA, 1.5W, B>10k, >125MHz	SOT-89	20tb	-	4b	Phi
p2X	-	PXT4401	Si-npn	Sw, 60V, 600mA, 1.3W, B=20..30, >250MHz	SOT-89	20tb	-	4b	Phi
P3	-	D70Y.8T1	Si-npn	AF, 35V, 800mA, 500mW, B=120..240	SOT-89	20tb	-	4b	Gen
P3	-	ELM9723CAB	Vdet-IC	2.3V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
P3	-	TC54VN4302MB	Vdet-IC	4.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
P3101C	-	PAM3101CCA150	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4b	Pam
P3101E	-	PAM3101CCA180	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4b	Pam
P3101G	-	PAM3101CCA250	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4b	Pam
P3101H	-	PAM3101CCA280	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4b	Pam
P3101H	-	PAM3101HCA280	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20ch	VR1	4b	Pam
P3101I	-	PAM3101CCA285	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-89	20vl	VR1	4b	Pam
P3101I	-	PAM3101HCA285	LVR-IC	LDO, 2.85V±2%, 300mA	SOT-89	20ch	VR1	4b	Pam
P3101J	-	PAM3101CCA300	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4b	Pam
P3101J	-	PAM3101HCA300	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20ch	VR1	4b	Pam
P3101K	-	PAM3101CCA330	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4b	Pam
P3101K	-	PAM3101HCA330	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20ch	VR1	4b	Pam
P3101M	-	PAM3101CCA400	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20vl	VR1	4b	Pam
P3101M	-	PAM3101HCA400	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20ch	VR1	4b	Pam
P3101O	-	PAM3101CCA380	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20vl	VR1	4b	Pam



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P3101O	-	PAM3101HCA380	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20ch	VR1	4b	Pam
P3101P	-	PAM3101CCA310	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20vl	VR1	4b	Pam
P3101P	-	PAM3101HCA310	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20ch	VR1	4b	Pam
P3101Q	-	PAM3101CCA290	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20vl	VR1	4b	Pam
P3101Q	-	PAM3101HCA290	LVR-IC	LDO, 2.90V±2%, 300mA	SOT-89	20ch	VR1	4b	Pam
P3101T	-	PAM3101CCA475	LVR-IC	LDO, 4.75V±2%, 300mA	SOT-89	20vl	VR1	4b	Pam
P3101T	-	PAM3101HCA475	LVR-IC	LDO, 4.75V±2%, 300mA	SOT-89	20ch	VR1	4b	Pam
P32	-	2SB1132PT-P	Si-pnp	AF, Sw, 32V, 1A, B=82..180, 150MHz	SOT-89	20tb	-	4g	Chm
P33	-	XC61CN4302P	Vdet-IC	4.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
P33	-	XE61CN4345PR	Vdet-IC	4.3V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
P33R	-	2DB1424R	Si-pnp	AF, Sw, 20V, 3A, 1W, B=180..390, 220MHz	SOT-89	20tb	-	4m	Di
P35	-	LN61FN4312P	Vdet-IC	4.3V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
P35	-	XC61FN4312P	Vdet-IC	4.3V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
P36	-	LN61FN4342P	Vdet-IC	4.3V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
P36	-	XC61FN4342P	Vdet-IC	4.3V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
P37	-	LN61FN4352P	Vdet-IC	4.3V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
P37	-	XC61FN4352P	Vdet-IC	4.3V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
P4	-	ELM9724CAB	Vdet-IC	2.4V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
P4	-	TC54VN4402MB	Vdet-IC	4.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
P43	-	XC61CN4402P	Vdet-IC	4.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
P43	-	XE61CN4445PR	Vdet-IC	4.4V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
P45	-	LN61FN4412P	Vdet-IC	4.4V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
P45	-	XC61FN4412P	Vdet-IC	4.4V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
P46	-	LN61FN4442P	Vdet-IC	4.4V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
P46	-	XC61FN4442P	Vdet-IC	4.4V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
P47	-	LN61FN4452P	Vdet-IC	4.4V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
P47	-	XC61FN4452P	Vdet-IC	4.4V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
P5	-	ELM9725CAB	Vdet-IC	2.5V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
P5	-	TC54VN4502MB	Vdet-IC	4.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
P52	-	ZVP4525Z	p-MOSFET	Switching, 250V, 205mA, 1.2W, Rds=14Ω(205mA), 1.53/17.5ms	SOT-89	20f2	-	4g	Zx
P53	-	XC61CN4502P	Vdet-IC	4.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
P53	-	XE61CN4545PR	Vdet-IC	4.5V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
P55	-	LN61FN4512P	Vdet-IC	4.5V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
P55	-	XC61FN4512P	Vdet-IC	4.5V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
P56	-	LN61FN4542P	Vdet-IC	4.5V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
P56	-	XC61FN4542P	Vdet-IC	4.5V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
P57	-	LN61FN4552P	Vdet-IC	4.5V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
P57	-	XC61FN4552P	Vdet-IC	4.5V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
P58	-	FCX558	Si-pnp	Sw, 400V, 200mA, 1W, B=100..300, >50MHz	SOT-89	20tb	-	4b	Zx
P6	-	ELM9726CAB	Vdet-IC	2.6V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
P6	-	TC54VN4602MB	Vdet-IC	4.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
P63	-	XC61CN4602P	Vdet-IC	4.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
P63	-	XE61CN4645PR	Vdet-IC	4.6V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
P64	-	2SD1664PT-P	Si-npn	AF, Sw, 32V, 1A, B=120..270, 150MHz	SOT-89	20tb	-	4b	Chm
P65	-	LN61FN4612P	Vdet-IC	4.6V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
P65	-	XC61FN4612P	Vdet-IC	4.6V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
P66	-	LN61FN4642P	Vdet-IC	4.6V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
P66	-	XC61FN4642P	Vdet-IC	4.6V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
P67	-	LN61FN4652P	Vdet-IC	4.6V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
P67	-	XC61FN4652P	Vdet-IC	4.6V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
P7	-	ELM9727CAB	Vdet-IC	2.7V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
P7	-	TC54VN4702MB	Vdet-IC	4.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
P73	-	XC61CN4702P	Vdet-IC	4.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
P73	-	XE61CN4745PR	Vdet-IC	4.7V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
P75	-	LN61FN4712P	Vdet-IC	4.7V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
P75	-	XC61FN4712P	Vdet-IC	4.7V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
P76	-	LN61FN4742P	Vdet-IC	4.7V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
P76	-	XC61FN4742P	Vdet-IC	4.7V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
P77	-	LN61FN4752P	Vdet-IC	4.7V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
P77	-	XC61FN4752P	Vdet-IC	4.7V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
P8	-	ELM9728CAB	Vdet-IC	2.8V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
P8	-	TC54VN4802MB	Vdet-IC	4.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
P82	-	2SD882PT-P	Si-npn	AF, Sw, 30V, 3A, B=160..320, 100MHz	SOT-89	20tb	-	4b	Chm
P83	-	XC61CN4802P	Vdet-IC	4.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
P83	-	XE61CN4845PR	Vdet-IC	4.8V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
P85	-	LN61FN4812P	Vdet-IC	4.8V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
P85	-	XC61FN4812P	Vdet-IC	4.8V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
P86	-	2SB1386PT-P	Si-pnp	AF, Sw, 20V, 5A, B=82..180, 120MHz	SOT-89	20tb	-	4g	Chm
P86	-	LN61FN4842P	Vdet-IC	4.8V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
P86	-	XC61FN4842P	Vdet-IC	4.8V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P87	-	LN61FN4852P	Vdet-IC	4.8V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
P87	-	XC61FN4852P	Vdet-IC	4.8V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
P89	-	FCX589	Si-pnp	GP, 50V, 1A, 1W, B=100..300, 100MHz	SOT-89	20tb	-	4g	Zx
P9	-	ELM9729CAB	Vdet-IC	2.9V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
P9	-	TC54VN4902MB	Vdet-IC	4.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
P93	-	FCX593	Si-pnp	Dr/Out, 120V, 1A, 1W, B=100..300, >50MHz	SOT-89	20tb	-	4b	Zx
P93	-	XC61CN4902P	Vdet-IC	4.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
P93	-	XE61CN4945PR	Vdet-IC	4.9V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
P95	-	LN61FN4912P	Vdet-IC	4.9V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
P95	-	XC61FN4912P	Vdet-IC	4.9V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
P96	-	FCX596	Si-pnp	Dr/Out, 220V, 300mA, 1W, B=35..100, >150MHz	SOT-89	20tb	-	4b	Zx
P96	-	LN61FN4942P	Vdet-IC	4.9V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
P96	-	XC61FN4942P	Vdet-IC	4.9V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
P97	-	LN61FN4952P	Vdet-IC	4.9V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
P97	-	XC61FN4952P	Vdet-IC	4.9V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
PA	-	2SJ179	p-MOSFET	GP, 30V, ±1.5A, 2W, <1Ω(500mA), 105/580ns	SOT-89	20fa	-	4b	Nec
PB	-	2SJ197	p-MOSFET	LogL, Sw, 60V, ±1.5A, 2W, Rds=0.9Ω(500mA), 45/380ns	SOT-89	20fi	-	4g	Nec
PB	-	DCG10	Si-diode	Hi-speed rect, 200V, 1A, Vf=1V(1A), 7pF, 90ns	PCP	20dm	-	4g	San
PC	-	2SJ199	p-MOSFET	LogL, Sw, 100V, ±1A, 2W, Rds=1.5Ω(500mA), 45/360ns	SOT-89	20fi	-	4g	Nec
PC	-	DCH10	Si-diode	Hi-speed rect., 200V, 1A, Vf=1V(1A), 7pF, 90ns	PCP	20bz	-	4g	San
PD	-	2SJ205	p-MOSFET	V-MOS, Sw, 16V, ±0.5A, <3Ω(0.5A)	SOT-89	20fa	-	4b	Nec
PE	-	2SJ207	p-MOSFET	V-MOS, Sw, 16V, ±1A <1.5Ω(0.5A)	SOT-89	20fa	-	4b	Nec
PF	-	2SJ208	p-MOSFET	V-MOS, Sw, 16V, ±2A, <1Ω(5A)	SOT-89	20fa	-	4b	Nec
PH	-	2SJ206	p-MOSFET	V-MOS, Sw, 30V, ±0.5A, <3Ω(0.5A)	SOT-89	20fa	-	4b	Nec
PK	-	2SA1173-K	Si-pnp	AF-Amp, 140V, 50mA, 2W, B=200..400, 80MHz	SOT-89	20tb	-	4b	Nec
PL	-	2SA1173-L	Si-pnp	AF-Amp, 140V, 50mA, 2W, B=135..270, 80MHz	SOT-89	20tb	-	4b	Nec
PM	-	2SA1173-M	Si-pnp	AF-Amp, 140V, 50mA, 2W, B=90..180, 80MHz	SOT-89	20tb	-	4b	Nec
PO	-	2SC2884-O	Si-npn	GP, 35V, 800mA, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4b	Tos
PO	-	2SJ212	p-MOSFET	V-MOS, Sw, 60V, ±0.5A, <3Ω(0.5A)	SOT-89	20fa	-	4b	Nec
PO	-	KTC4376-O	Si-npn	AF-Drv, 35V, 800mA, 500mW, B=100..200, >120MHz	SOT-89	20tb	-	4a	Kec
PP	-	2SJ213	p-MOSFET	V-MOS, Sw, 100V, ±0.5A, <4.2Ω(0.5A)	SOT-89	20fa	-	4b	Nec
PQ	-	2SD1511-Q	Si-npn-Darl	AF, 100V, 1A, 1W, 150MHz, B=4k..10k	SOT-89	20tb	-	4b	Pan
PQ	-	2SJ355	p-MOSFET	V-MOS, LogL, 30V, ±2A, <0.35Ω(5A)	SOT-89	20fa	-	4b	Nec
PR	-	2SD1511-R	Si-npn-Darl	AF, 100V, 1A, 1W, 150MHz, B=8k., 20k	SOT-89	20tb	-	4b	Pan
PR	-	2SJ356	p-MOSFET	V-MOS, LogL, 60V, ±2A, <0.5Ω(5A)	SOT-89	20fa	-	4b	Nec
PS	-	2SD1511-S	Si-npn-Darl	AF, 100V, 1A, 1W, 150MHz, B=16k..40k	SOT-89	20tb	-	4b	Pan
PY	-	2SC2884-Y	Si-npn	GP, 35V, 800mA, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4b	Tos
PY	-	2SJ363	p-MOSFET	V-MOS, LogL, 30V, 2A, <0.45Ω(1A), integr, Rgate	SOT-89	20fa	-	4b	Ren
PY	-	KTC4376-Y	Si-npn	AF-Drv, 35V, 800mA, 500mW, B=160..320, >120MHz	SOT-89	20tb	-	4a	Kec
Q1766	-	2SC1766PT-Q	Si-npn	AF, Sw, 50V, 2A, B=120..270, 120MHz	SOT-89	20tb	-	4b	Chm
Q32	-	2SB1132PT-Q	Si-pnp	AF, Sw, 32V, 1A, B=120..270, 150MHz	SOT-89	20tb	-	4g	Chm
Q64	-	2SD1664PT-Q	Si-npn	AF, Sw, 32V, 1A, B=180..390, 150MHz	SOT-89	20tb	-	4b	Chm
Q72	-	2SB772PT-Q	Si-pnp	AF, Sw, 30V, 3A, B=100..200, 300MHz	SOT-89	20tb	-	4g	Chm
Q82	-	2SD882PT-Q	Si-npn	AF, Sw, 30V, 3A, B=100..200, 100MHz	SOT-89	20tb	-	4b	Chm
Q86	-	2SB1386PT-Q	Si-pnp	AF, Sw, 20V, 5A, B=120..270, 120MHz	SOT-89	20tb	-	4g	Chm
Q98	-	2SD2098PT-Q	Si-npn	AF, Sw, 20V, 5A, B=120..270, 150MHz	SOT-89	20tb	-	4b	Chm
QG	-	KTB1260-G	Si-pnp	GP, 80V, 1A, 500mW, B=70..140, 100MHz	SOT-89	20tb	-	4a	Kec
QK	-	2SC2954	Si-npn	VHF/UHF-Mix, 35V, 150mA, 2W, B=30..200, 4GHz	SOT-89	20tb	-	4b	Nec
QK	-	AP160-25Y	LVR-IC	LDO, 2.5V±1.5%, 600mA	SOT-89	20vl	VR1	4b	Ana
QO	-	KTB1260-O	Si-pnp	GP, 80V, 1A, 500mW, B=120..240, 100MHz	SOT-89	20tb	-	4a	Kec
QQ	-	2SC4536-Q	Si-npn	UHF/CATV, 30V, 250mA, 2W, 5.5GHz, B=40..180	SOT-89	20tb	-	4b	Nec
QQ	-	2SC5337-Q	Si-npn	UHF-Amp, 30V, 250mA, 2W, B=40..80, 1GHz	SOT-89	20tb	-	4b	Nec
QR	-	2SC4536-R	Si-npn	UHF/CATV, 30V, 250mA, 2W, 5.5GHz, B=60..120	SOT-89	20tb	-	4b	Nec
QR	-	2SC5337-R	Si-npn	UHF-Amp, 30V, 250mA, 2W, B=60..120, 1GHz	SOT-89	20tb	-	4b	Nec
QS	-	2SC4536-S	Si-npn	UHF/CATV, 30V, 250mA, 2W, 5.5GHz, B=100..200	SOT-89	20tb	-	4b	Nec
QS	-	2SC5337-S	Si-npn	UHF-Amp, 30V, 250mA, 2W, B=100..200, 1GHz	SOT-89	20tb	-	4b	Nec
QS	-	AP160-33Y	LVR-IC	LDO, 3.3V±1.5%, 600mA	SOT-89	20vl	VR1	4b	Ana
QX	-	NEC46134	Si-npn	µWave, 30V, 250mA, 3.75W, B=40..200, 5.5GHz	SOT-89	20tb	-	4b	Cel
QY	-	2SK2247	n-MOSFET	V-MOS, LogL, 60V, ±2A, <0.35Ω(2.5A)	SOT-89	20fa	-	4b	Ren
QY	-	KTB1260-Y	Si-pnp	GP, 80V, 1A, 500mW, B=200..400, 100MHz	SOT-89	20tb	-	4a	Kec
R0	-	ELM9730CAB	Vdet-IC	3.0V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
R0	-	TC54VN5002MB	Vdet-IC	5.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
R03	-	XC61CN5002P	Vdet-IC	5.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
R03	-	XE61CN5045PR	Vdet-IC	5.0V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
R05	-	LN61FN5012P	Vdet-IC	5.0V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
R05	-	XC61FN5012P	Vdet-IC	5.0V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
R06	-	LN61FN5042P	Vdet-IC	5.0V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
R06	-	XC61FN5042P	Vdet-IC	5.0V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
R07	-	LN61FN5052P	Vdet-IC	5.0V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
R07	-	XC61FN5052P	Vdet-IC	5.0V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R1	-	D71Y.8T1	Si-pnp	AF, 35V, 800mA, 500mW, B=70..240	SOT-89	20tb	-	4b	Gen
R1	-	ELM9731CAB	Vdet-IC	3.1V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
R1	-	TC54VN5102MB	Vdet-IC	5.1V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
R113	-	CM7R250-11B-P	LVR-IC	LDO, 1.1V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R1188	-	2SB1188PT-R	Si-pnp	AF, Sw, 32V, 2A, B=180..390, 100MHz	SOT-89	20tb	-	4g	Chm
R11B	-	ML62113P	LVR-IC	1.1V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R123	-	CM7R250-12B-P	LVR-IC	LDO, 1.2V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R12B	-	ML62123P	LVR-IC	1.2V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R13	-	XC61CN5102P	Vdet-IC	5.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
R13	-	XE61CN5145PR	Vdet-IC	5.1V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
R133	-	CM7R250-13B-P	LVR-IC	LDO, 1.3V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R13B	-	ML62133P	LVR-IC	1.3V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R143	-	CM7R250-14B-P	LVR-IC	LDO, 1.4V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R14B	-	ML62143P	LVR-IC	1.4V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R15	-	LN61FN5112P	Vdet-IC	5.1V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
R15	-	XC61FN5112P	Vdet-IC	5.1V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
R153	-	CM7R250-15B-P	LVR-IC	LDO, 1.5V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R15B	-	ML62153P	LVR-IC	1.5V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R16	-	LN61FN5142P	Vdet-IC	5.1V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
R16	-	XC61FN5142P	Vdet-IC	5.1V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
R163	-	CM7R250-16B-P	LVR-IC	LDO, 1.6V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R16B	-	ML62163P	LVR-IC	1.6V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R17	-	LN61FN5152P	Vdet-IC	5.1V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
R17	-	XC61FN5152P	Vdet-IC	5.1V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
R173	-	CM7R250-17B-P	LVR-IC	LDO, 1.7V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R17B	-	ML62173P	LVR-IC	1.7V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R183	-	CM7R250-18B-P	LVR-IC	LDO, 1.8V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R18B	-	ML62183P	LVR-IC	1.8V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R193	-	CM7R250-19B-P	LVR-IC	LDO, 1.9V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R19B	-	ML62193P	LVR-IC	1.9V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R1B3	-	CM7R250-11A-P	LVR-IC	LDO, 1.15V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R1C3	-	CM7R250-12A-P	LVR-IC	LDO, 1.25V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R1D3	-	CM7R250-13A-P	LVR-IC	LDO, 1.35V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R1E3	-	CM7R250-14A-P	LVR-IC	LDO, 1.45V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R1F3	-	CM7R250-15A-P	LVR-IC	LDO, 1.55V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R1G3	-	CM7R250-16A-P	LVR-IC	LDO, 1.65V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R1H3	-	CM7R250-17A-P	LVR-IC	LDO, 1.75V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R1I3	-	CM7R250-18A-P	LVR-IC	LDO, 1.85V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R1J3	-	CM7R250-19A-P	LVR-IC	LDO, 1.95V±3%, 150mA	SOT-89	20vl	VR1	4g	Can
R2	-	D71Y.8T1	Si-pnp	AF, 35V, 800mA, 500mW, B=70..140	SOT-89	20tb	-	4b	Gen
R2	-	ELM9732CAB	Vdet-IC	3.2V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
R2	-	TC54VN5202MB	Vdet-IC	5.2V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
R202	-	CM7R250-20B-P	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R20B	-	ML62202P	LVR-IC	2.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R212	-	CM7R250-21B-P	LVR-IC	LDO, 2.1V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R21B	-	ML62212P	LVR-IC	2.1V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R222	-	CM7R250-22B-P	LVR-IC	LDO, 2.2V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R22B	-	ML62222P	LVR-IC	2.2V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R23	-	XC61CN5202P	Vdet-IC	5.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
R23	-	XE61CN5245PR	Vdet-IC	5.2V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
R232	-	CM7R250-23B-P	LVR-IC	LDO, 2.3V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R23B	-	ML62232P	LVR-IC	2.3V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R242	-	CM7R250-24B-P	LVR-IC	LDO, 2.4V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R24B	-	ML62242P	LVR-IC	2.4V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R25	-	LN61FN5212P	Vdet-IC	5.2V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
R25	-	XC61FN5212P	Vdet-IC	5.2V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
R252	-	CM7R250-25B-P	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R25B	-	ML62252P	LVR-IC	2.5V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R26	-	LN61FN5242P	Vdet-IC	5.2V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
R26	-	XC61FN5242P	Vdet-IC	5.2V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
R262	-	CM7R250-26B-P	LVR-IC	LDO, 2.6V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R26B	-	ML62262P	LVR-IC	2.6V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R27	-	LN61FN5252P	Vdet-IC	5.2V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
R27	-	XC61FN5252P	Vdet-IC	5.2V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
R272	-	CM7R250-27B-P	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R27B	-	ML62272P	LVR-IC	2.7V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R282	-	CM7R250-28B-P	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R28B	-	ML62282P	LVR-IC	2.8V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R292	-	CM7R250-29B-P	LVR-IC	LDO, 2.9V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R29B	-	ML62292P	LVR-IC	2.9V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R2A2	-	CM7R250-20A-P	LVR-IC	LDO, 2.05V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R2B2	-	CM7R250-21A-P	LVR-IC	LDO, 2.15V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R2C2	-	CM7R250-22A-P	LVR-IC	LDO, 2.25V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R2D2	-	CM7R250-23A-P	LVR-IC	LDO, 2.35V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R2E2	-	CM7R250-24A-P	LVR-IC	LDO, 2.45V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R2F2	-	CM7R250-25A-P	LVR-IC	LDO, 2.55V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R2G2	-	CM7R250-26A-P	LVR-IC	LDO, 2.65V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R2H2	-	CM7R250-27A-P	LVR-IC	LDO, 2.75V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R2I2	-	CM7R250-28A-P	LVR-IC	LDO, 2.85V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R2J2	-	CM7R250-29A-P	LVR-IC	LDO, 2.95V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R3	-	D71Y.8T1	Si-pnp	AF, 35V, 800mA, 500mW, B=120..240	SOT-89	20tb	-	4b	Gen
R3	-	ELM9733CAB	Vdet-IC	3.3V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
R3	-	TC54VN5302MB	Vdet-IC	5.3V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
R302	-	CM7R250-30B-P	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R30B	-	ML62302P	LVR-IC	3.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R312	-	CM7R250-31B-P	LVR-IC	LDO, 3.1V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R31B	-	ML62312P	LVR-IC	3.1V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R322	-	CM7R250-32B-P	LVR-IC	LDO, 3.2V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R32B	-	ML62322P	LVR-IC	3.2V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R33	-	XC61CN5302P	Vdet-IC	5.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
R33	-	XE61CN5345PR	Vdet-IC	5.3V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
R332	-	CM7R250-33B-P	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R33B	-	ML62332P	LVR-IC	3.3V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R342	-	CM7R250-34B-P	LVR-IC	LDO, 3.4V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R34B	-	ML62342P	LVR-IC	3.4V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R35	-	LN61FN5312P	Vdet-IC	5.3V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
R35	-	XC61FN5312P	Vdet-IC	5.3V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
R352	-	CM7R250-35B-P	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R35B	-	ML62352P	LVR-IC	3.5V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R36	-	LN61FN5342P	Vdet-IC	5.3V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
R36	-	XC61FN5342P	Vdet-IC	5.3V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
R362	-	CM7R250-36B-P	LVR-IC	LDO, 3.6V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R36B	-	ML62362P	LVR-IC	3.6V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R37	-	LN61FN5352P	Vdet-IC	5.3V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
R37	-	XC61FN5352P	Vdet-IC	5.3V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
R372	-	CM7R250-37B-P	LVR-IC	LDO, 3.7V±2%, 150mAV	SOT-89	20vl	VR1	4g	Can
R37B	-	ML62372P	LVR-IC	3.7V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R382	-	CM7R250-38B-P	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R38B	-	ML62382P	LVR-IC	3.8V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R392	-	CM7R250-39B-P	LVR-IC	LDO, 3.9V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R39B	-	ML62392P	LVR-IC	3.9V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R3A2	-	CM7R250-30A-P	LVR-IC	LDO, 3.05V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R3B2	-	CM7R250-31A-P	LVR-IC	LDO, 3.15V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R3C2	-	CM7R250-32A-P	LVR-IC	LDO, 3.25V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R3D2	-	CM7R250-33A-P	LVR-IC	LDO, 3.35V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R3E2	-	CM7R250-34A-P	LVR-IC	LDO, 3.45V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R3F2	-	CM7R250-35A-P	LVR-IC	LDO, 3.55V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R3G2	-	CM7R250-36A-P	LVR-IC	LDO, 3.65V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R3H2	-	CM7R250-37A-P	LVR-IC	LDO, 3.75V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R3I2	-	CM7R250-38A-P	LVR-IC	LDO, 3.85V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R3J2	-	CM7R250-39A-P	LVR-IC	LDO, 3.95V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R4	-	ELM9734CAB	Vdet-IC	3.4V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
R4	-	TC54VN5402MB	Vdet-IC	5.4V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
R402	-	CM7R250-40B-P	LVR-IC	LDO, 4.0V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R40B	-	ML62402P	LVR-IC	4.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R412	-	CM7R250-41B-P	LVR-IC	LDO, 4.1V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R41B	-	ML62412P	LVR-IC	4.1V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R422	-	CM7R250-42B-P	LVR-IC	LDO, 4.2V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R42B	-	ML62422P	LVR-IC	4.2V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R43	-	XC61CN5402P	Vdet-IC	5.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
R43	-	XE61CN5445PR	Vdet-IC	5.4V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
R432	-	CM7R250-43B-P	LVR-IC	LDO, 4.3V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R43B	-	ML62432P	LVR-IC	4.3V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R442	-	CM7R250-44B-P	LVR-IC	LDO, 4.4V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R44B	-	ML62442P	LVR-IC	4.4V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R45	-	LN61FN5412P	Vdet-IC	5.4V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
R45	-	XC61FN5412P	Vdet-IC	5.4V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
R452	-	CM7R250-45B-P	LVR-IC	LDO, 4.5V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R45B	-	ML62452P	LVR-IC	4.5V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R46	-	LN61FN5442P	Vdet-IC	5.4V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R46	-	XC61FN5442P	Vdet-IC	5.4V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
R462	-	CM7R250-46B-P	LVR-IC	LDO, 4.6V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R46B	-	ML62462P	LVR-IC	4.6V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R47	-	LN61FN5452P	Vdet-IC	5.4V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
R47	-	XC61FN5452P	Vdet-IC	5.4V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
R472	-	CM7R250-47B-P	LVR-IC	LDO, 4.7V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R47B	-	ML62472P	LVR-IC	4.7V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R482	-	CM7R250-48B-P	LVR-IC	LDO, 4.8V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R48B	-	ML62482P	LVR-IC	4.8V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R492	-	CM7R250-49B-P	LVR-IC	LDO, 4.9V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R49B	-	ML62492P	LVR-IC	4.9V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R4A2	-	CM7R250-40A-P	LVR-IC	LDO, 4.05V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R4B2	-	CM7R250-41A-P	LVR-IC	LDO, 4.15V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R4C2	-	CM7R250-42A-P	LVR-IC	LDO, 4.25V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R4D2	-	CM7R250-43A-P	LVR-IC	LDO, 4.35V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R4E2	-	CM7R250-44A-P	LVR-IC	LDO, 4.45V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R4F2	-	CM7R250-45A-P	LVR-IC	LDO, 4.55V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R4G2	-	CM7R250-46A-P	LVR-IC	LDO, 4.65V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R4H2	-	CM7R250-47A-P	LVR-IC	LDO, 4.75V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R4I2	-	CM7R250-48A-P	LVR-IC	LDO, 4.85V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R4J2	-	CM7R250-49A-P	LVR-IC	LDO, 4.95V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R5	-	ELM9735CAB	Vdet-IC	3.5V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
R5	-	TC54VN5502MB	Vdet-IC	5.5V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
R502	-	CM7R250-50B-P	LVR-IC	LDO, 5.0V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R50B	-	ML62502P	LVR-IC	5.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R512	-	CM7R250-51B-P	LVR-IC	LDO, 5.1V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R51B	-	ML62512P	LVR-IC	5.1V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R522	-	CM7R250-52B-P	LVR-IC	LDO, 5.2V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R52B	-	ML62522P	LVR-IC	5.2V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R53	-	XC61CN5502P	Vdet-IC	5.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
R53	-	XE61CN5545PR	Vdet-IC	5.5V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
R532	-	CM7R250-53B-P	LVR-IC	LDO, 5.3V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R53B	-	ML62532P	LVR-IC	5.3V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R542	-	CM7R250-54B-P	LVR-IC	LDO, 5.4V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R54B	-	ML62542P	LVR-IC	5.4V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R55	-	LN61FN5512P	Vdet-IC	5.5V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
R55	-	XC61FN5512P	Vdet-IC	5.5V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
R552	-	CM7R250-55B-P	LVR-IC	LDO, 5.5V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R55B	-	ML62552P	LVR-IC	5.5V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R56	-	LN61FN5542P	Vdet-IC	5.5V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
R56	-	XC61FN5542P	Vdet-IC	5.5V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
R562	-	CM7R250-56B-P	LVR-IC	LDO, 5.6V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R56B	-	ML62562P	LVR-IC	5.6V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R57	-	LN61FN5552P	Vdet-IC	5.5V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
R57	-	XC61FN5552P	Vdet-IC	5.5V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
R572	-	CM7R250-57B-P	LVR-IC	LDO, 5.7V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R57B	-	ML62572P	LVR-IC	5.7V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R582	-	CM7R250-58B-P	LVR-IC	LDO, 5.8V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R58B	-	ML62582P	LVR-IC	5.8V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R592	-	CM7R250-59B-P	LVR-IC	LDO, 5.9V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R59B	-	ML62592P	LVR-IC	5.9V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R5A2	-	CM7R250-50A-P	LVR-IC	LDO, 5.05V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R5B2	-	CM7R250-51A-P	LVR-IC	LDO, 5.15V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R5C2	-	CM7R250-52A-P	LVR-IC	LDO, 5.25V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R5D2	-	CM7R250-53A-P	LVR-IC	LDO, 5.35V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R5E2	-	CM7R250-54A-P	LVR-IC	LDO, 5.45V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R5F2	-	CM7R250-55A-P	LVR-IC	LDO, 5.55V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R5G2	-	CM7R250-56A-P	LVR-IC	LDO, 5.65V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R5H2	-	CM7R250-57A-P	LVR-IC	LDO, 5.75V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R5I2	-	CM7R250-58A-P	LVR-IC	LDO, 5.85V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R5J2	-	CM7R250-59A-P	LVR-IC	LDO, 5.95V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R6	-	ELM9736CAB	Vdet-IC	3.6V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
R6	-	TC54VN5602MB	Vdet-IC	5.6V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
R602	-	CM7R250-60B-P	LVR-IC	LDO, 6.0V±2%, 150mA	SOT-89	20vl	VR1	4g	Can
R60B	-	ML62602P	LVR-IC	6.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
R63	-	XC61CN5602P	Vdet-IC	5.6V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
R63	-	XE61CN5645PR	Vdet-IC	5.6V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
R65	-	LN61FN5612P	Vdet-IC	5.6V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
R65	-	XC61FN5612P	Vdet-IC	5.6V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
R66	-	LN61FN5642P	Vdet-IC	5.6V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R66	-	XC61FN5642P	Vdet-IC	5.6V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
R67	-	LN61FN5652P	Vdet-IC	5.6V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
R67	-	XC61FN5652P	Vdet-IC	5.6V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
R7	-	ELM9737CAB	Vdet-IC	3.7V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
R7	-	TC54VN5702MB	Vdet-IC	5.7V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
R73	-	XC61CN5702P	Vdet-IC	5.7V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
R73	-	XE61CN5745PR	Vdet-IC	5.7V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
R75	-	LN61FN5712P	Vdet-IC	5.7V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
R75	-	XC61FN5712P	Vdet-IC	5.7V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
R76	-	LN61FN5742P	Vdet-IC	5.7V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
R76	-	XC61FN5742P	Vdet-IC	5.7V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
R77	-	LN61FN5752P	Vdet-IC	5.7V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
R77	-	XC61FN5752P	Vdet-IC	5.7V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
R8	-	ELM9738CAB	Vdet-IC	3.8V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
R8	-	TC54VN5802MB	Vdet-IC	5.8V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
R83	-	XC61CN5802P	Vdet-IC	5.8V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
R83	-	XE61CN5845PR	Vdet-IC	5.8V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
R85	-	LN61FN5812P	Vdet-IC	5.8V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
R85	-	XC61FN5812P	Vdet-IC	5.8V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
R86	-	2SB1386PT-R	Si-pnp	AF, Sw, 20V, 5A, B=180..390, 120MHz	SOT-89	20tb	-	4g	Chm
R86	-	LN61FN5842P	Vdet-IC	5.8V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
R86	-	XC61FN5842P	Vdet-IC	5.8V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
R87	-	LN61FN5852P	Vdet-IC	5.8V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
R87	-	XC61FN5852P	Vdet-IC	5.8V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
R9	-	ELM9739CAB	Vdet-IC	3.9V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
R9	-	TC54VN5902MB	Vdet-IC	5.9V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
R93	-	XC61CN5902P	Vdet-IC	5.9V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
R93	-	XE61CN5945PR	Vdet-IC	5.9V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
R95	-	LN61FN5912P	Vdet-IC	5.9V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
R95	-	XC61FN5912P	Vdet-IC	5.9V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
R96	-	LN61FN5942P	Vdet-IC	5.9V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
R96	-	XC61FN5942P	Vdet-IC	5.9V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
R97	-	LN61FN5952P	Vdet-IC	5.9V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
R97	-	XC61FN5952P	Vdet-IC	5.9V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor
R98	-	2SD2098PT-R	Si-npn	AF, Sw, 20V, 5A, B=180..390, 150MHz	SOT-89	20tb	-	4b	Chm
RCs	-	BFQ193	Si-npn	UHF-A, 20V, 80mA, 600mW, B=50..500, 7.5GHz	SOT-89	20tb	-	4b	Sie
RE	-	2SC3357-E	Si-npn	VHF/UHF, CATV, 20V, 100mA, 1.2W, B=125..250, 6.5GHz	SOT-89	20tb	-	4b	Nec
RE	-	2SC5336-E	Si-npn	HF, 20V, 100mA, 1.2W, 5GHz, B=125..250	SOT-89	20tb	-	4b	Nec
RE	-	NE85634-E	Si-npn	VHF/UHF, CATV, 20V, 100mA, 1.2W, B=125..250, 6.5GHz	SOT-89	20tb	-	4b	Cel
RF	-	2SC3357-F	Si-npn	VHF/UHF, CATV, 20V, 100mA, 1.2W, B=80..160, 6.5GHz	SOT-89	20tb	-	4b	Nec
RF	-	2SC5336-F	Si-npn	HF, 20V, 100mA, 1.2W, 5GHz, B=80..160	SOT-89	20tb	-	4b	Nec
RF	-	NE85634-F	Si-npn	VHF/UHF, CATV, 20V, 100mA, 1.2W, B=80..160, 6.5GHz	SOT-89	20tb	-	4b	Cel
RH	-	2SC3357-H	Si-npn	VHF/UHF, CATV, 20V, 100mA, 1.2W, B=50..100, 6.5GHz	SOT-89	20tb	-	4b	Nec
RH	-	2SC5209-H	Si-npn	Hi-B, Rel-drv, 50V, 1A, 500mW, 130MHz, B=600..1200	SOT-89	20tb	-	4a	Ish
RH	-	2SC5209-J	Si-npn	Hi-B, Rel-drv, 50V, 1A, 500mW, 130MHz, B=900..1800	SOT-89	20tb	-	4a	Ish
RH	-	2SC5336-H	Si-npn	HF, 20V, 100mA, 1.2W, 5GHz, B=50..100	SOT-89	20tb	-	4b	Nec
RH	-	NE85634-H	Si-npn	VHF/UHF, CATV, 20V, 100mA, 1.2W, B=50..100, 6.5GHz	SOT-89	20tb	-	4b	Cel
RO	-	2SA1024-O	Si-pnp	GP, 30V, 800mA, 500mW, B=100..200, 120MHz	SOT-89	20tb	-	4b	Tos
RO	-	2SA1204-O	Si-pnp	GP, 35V, 800mA, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4b	Tos
RO	-	2SA1664-O	Si-pnp	AF, Sw, 35V, 800mA, 500mW, 120MHz, B=100..200	SOT-89	20tb	-	4b	Trs
RO	-	KTA1664-O	Si-pnp	AF-Drv, 35V, 800mA, 500mW, B=100..200, >120MHz	SOT-89	20tb	-	4a	Kec
RQ	-	2SD1280-Q	Si-npn	AF-Drv, 20V, 1A, 1W, B=90..155, 150MHz	SOT-89	20tb	-	4g	Pan
RR	-	2SD1280-R	Si-npn	GP, AF, 20V, 1A, 1W, B=130..210, 200MHz	SOT-89	20tb	-	4b	Pan
RS	-	2SD1280-S	Si-npn	GP, AF, 20V, 1A, 1W, B=180..280, 200MHz	SOT-89	20tb	-	4b	Pan
RY	-	2SA1024-Y	Si-pnp	GP, 30V, 800mA, 500mW, B=160..320, 120MHz	SOT-89	20tb	-	4b	Tos
RY	-	2SA1204-Y	Si-pnp	GP, 35V, 800mA, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4b	Tos
RY	-	2SA1664-Y	Si-pnp	AF, Sw, 35V, 800mA, 500mW, 120MHz, B=160..320	SOT-89	20tb	-	4b	Trs
RY	-	2SJ361	p-MOSFET	V-MOS, LogL, 20V, 2A, <0.4Ω(1A), integr, Rgate	SOT-89	20fa	-	4b	Ren
RY	-	KTA1664-Y	Si-pnp	AF-Drv, 35V, 800mA, 500mW, B=160..320, >120MHz	SOT-89	20tb	-	4a	Kec
S0	-	ELM9740CAB	Vdet-IC	4.0V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
S0	-	TC54VN6002MB	Vdet-IC	6.0V±2%, -Reset ODO	SOT-89	20vda	VD6	4v	Mcc
S002G	-	SCG002B-G	MMIC	Buff/amp, DC..6GHz, 21dB (1GHz, 50Ω)	SOT-89	20aa	A1	4i	Wjc
S03	-	XC61CN6002P	Vdet-IC	6.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4c	Tor
S03	-	XE61CN6045PR	Vdet-IC	6.0V±2%, -Reset ODO	SOT-89	20cj	VD6	4j	Tor
S05	-	LN61FN6012P	Vdet-IC	6.0V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4h	Nln
S05	-	XC61FN6012P	Vdet-IC	6.0V±2%, +Reset ODO, 200ms	SOT-89	20vda	VD6	4c	Tor
S06	-	LN61FN6042P	Vdet-IC	6.0V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4h	Nln
S06	-	XC61FN6042P	Vdet-IC	6.0V±2%, +Reset ODO, 400ms	SOT-89	20vda	VD6	4c	Tor
S07	-	LN61FN6052P	Vdet-IC	6.0V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4h	Nln
S07	-	XC61FN6052P	Vdet-IC	6.0V±2%, +Reset ODO, 50ms	SOT-89	20vda	VD6	4c	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S08	-	BS808	p-MOSFET	D-MOS, Sw, 240V, 200mA, 830mW, <7Ω(100mA), 5/20ns	SOT-89	20fi	-	4b	Itt
S1	-	ELM9741CAB	Vdet-IC	4.1V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
S2	-	ELM9742CAB	Vdet-IC	4.2V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
S23	-	BS723	p-MOSFET	D-MOS, Sw, 60V, 1A, 830mW, <0.7Ω(600mA), 40/100ns	SOT-89	20fi	-	4b	Itt
S3	-	ELM9743CAB	Vdet-IC	4.3V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
S4	-	ELM9744CAB	Vdet-IC	4.4V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
S5	-	ELM9745CAB	Vdet-IC	4.5V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
S50	-	LN1130P311PR	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S5E	-	LN1130P152PR	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S5F	-	LN1130P162PR	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S5H	-	LN1130P172PR	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S5K	-	LN1130P182PR	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S5L	-	LN1130P192PR	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S5M	-	LN1130P202PR	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S5N	-	LN1130P212PR	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S5P	-	LN1130P222PR	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S5R	-	LN1130P232PR	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S5S	-	LN1130P242PR	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S5T	-	LN1130P252PR	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S5U	-	LN1130P262PR	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S5V	-	LN1130P272PR	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S5X	-	LN1130P282PR	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S5Y	-	LN1130P292PR	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S5Z	-	LN1130P302PR	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S6	-	ELM9746CAB	Vdet-IC	4.6V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
S61	-	LN1130P322PR	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S62	-	LN1130P332PR	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S63	-	LN1130P342PR	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S64	-	LN1130P352PR	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S65	-	LN1130P362PR	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S66	-	LN1130P372PR	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S67	-	LN1130P382PR	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S68	-	LN1130P392PR	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S69	-	LN1130P402PR	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S6A	-	LN1130P412PR	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S6B	-	LN1130P422PR	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S6C	-	LN1130P432PR	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S6D	-	LN1130P442PR	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S6E	-	LN1130P452PR	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S6G	-	LN1130P462PR	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S6H	-	LN1130P472PR	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S6K	-	LN1130P482PR	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S6L	-	LN1130P492PR	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S6M	-	LN1130P502PR	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S6N	-	LN1130P512PR	LVR-IC	LDO, 5.1V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S6P	-	LN1130P522PR	LVR-IC	LDO, 5.2V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S6R	-	LN1130P532PR	LVR-IC	LDO, 5.3V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S6S	-	LN1130P542PR	LVR-IC	LDO, 5.4V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S6T	-	LN1130P552PR	LVR-IC	LDO, 5.5V±2%, 300mA	SOT-89	20vl	VR1	4h	Nln
S7	-	ELM9747CAB	Vdet-IC	4.7V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
S8	-	ELM9748CAB	Vdet-IC	4.8V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
S9	-	ELM9749CAB	Vdet-IC	4.9V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
SA	-	2SC2982-A	Si-npn	Lo-sat., 30V, 2A, 500mW, B=140..240, >140MHz	SOT-89	20tb	-	4b	Tos
SA	-	KTC4377-A	Si-npn	Lo-sat, 30V, 2A, 500mW, B=140..240, 150MHz	SOT-89	20tb	-	4a	Kec
SAA	-	S-1206B12-U3T1G	LVR-IC	LDO, 1.2V±15mV, 250mA	SOT-89	20vl	VR1	4a	Sii
SAB	-	S-1206B13-U3T1G	LVR-IC	LDO, 1.3V±15mV, 250mA	SOT-89	20vl	VR1	4a	Sii
SAC	-	S-1206B14-U3T1G	LVR-IC	LDO, 1.4V±15mV, 250mA	SOT-89	20vl	VR1	4a	Sii
SAD	-	S-1206B15-U3T1G	LVR-IC	LDO, 1.5V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAE	-	S-1206B16-U3T1G	LVR-IC	LDO, 1.6V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAF	-	S-1206B17-U3T1G	LVR-IC	LDO, 1.7V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAG	-	S-1206B18-U3T1G	LVR-IC	LDO, 1.8V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAH	-	S-1206B1J-U3T1G	LVR-IC	LDO, 1.85V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAI	-	S-1206B19-U3T1G	LVR-IC	LDO, 1.9V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAJ	-	S-1206B20-U3T1G	LVR-IC	LDO, 2.0V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAK	-	S-1206B21-U3T1G	LVR-IC	LDO, 2.1V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAL	-	S-1206B22-U3T1G	LVR-IC	LDO, 2.2V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAM	-	S-1206B23-U3T1G	LVR-IC	LDO, 2.3V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAN	-	S-1206B24-U3T1G	LVR-IC	LDO, 2.4V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAO	-	S-1206B25-U3T1G	LVR-IC	LDO, 2.5V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAP	-	S-1206B26-U3T1G	LVR-IC	LDO, 2.6V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SAQ	-	S-1206B27-U3T1G	LVR-IC	LDO, 2.7V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAR	-	S-1206B28-U3T1G	LVR-IC	LDO, 2.8V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAS	-	S-1206B2J-U3T1G	LVR-IC	LDO, 2.85V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAT	-	S-1206B29-U3T1G	LVR-IC	LDO, 2.9V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAU	-	S-1206B30-U3T1G	LVR-IC	LDO, 3.0V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAV	-	S-1206B31-U3T1G	LVR-IC	LDO, 3.1V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAW	-	S-1206B32-U3T1G	LVR-IC	LDO, 3.2V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAX	-	S-1206B33-U3T1G	LVR-IC	LDO, 3.3V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAY	-	S-1206B34-U3T1G	LVR-IC	LDO, 3.4V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SAZ	-	S-1206B35-U3T1G	LVR-IC	LDO, 3.5V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SB	-	2SC2982-B	Si-npn	Lo-sat., 30V, 2A, 500mW, B=200.330, >140MHz	SOT-89	20tb	-	4b	Tos
SB	-	KTC4377-B	Si-npn	Lo-sat, 30V, 2A, 500mW, B=200..330, 150MHz	SOT-89	20tb	-	4a	Kec
SBA	-	S-1206B36-U3T1G	LVR-IC	LDO, 3.6V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SBB	-	S-1206B37-U3T1G	LVR-IC	LDO, 3.7V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SBC	-	S-1206B38-U3T1G	LVR-IC	LDO, 3.8V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SBD	-	S-1206B39-U3T1G	LVR-IC	LDO, 3.9V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SBE	-	S-1206B40-U3T1G	LVR-IC	LDO, 4.0V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SBF	-	S-1206B41-U3T1G	LVR-IC	LDO, 4.1V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SBG	-	S-1206B42-U3T1G	LVR-IC	LDO, 4.2V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SBH	-	S-1206B43-U3T1G	LVR-IC	LDO, 4.3V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SBI	-	S-1206B44-U3T1G	LVR-IC	LDO, 4.4V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SBJ	-	S-1206B45-U3T1G	LVR-IC	LDO, 4.5V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SBK	-	S-1206B46-U3T1G	LVR-IC	LDO, 4.6V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SBL	-	S-1206B47-U3T1G	LVR-IC	LDO, 4.7V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SBM	-	S-1206B48-U3T1G	LVR-IC	LDO, 4.8V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SBN	-	S-1206B49-U3T1G	LVR-IC	LDO, 4.9V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SBO	-	S-1206B50-U3T1G	LVR-IC	LDO, 5.0V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SBP	-	S-1206B51-U3T1G	LVR-IC	LDO, 5.1V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SBQ	-	S-1206B52-U3T1G	LVR-IC	LDO, 5.2V±1.0%, 250mA	SOT-89	20vl	VR1	4a	Sii
SC	-	2SC2982-C	Si-npn	Lo-sat., 30V, 2A, 500mW, B=300.450, >140MHz	SOT-89	20tb	-	4b	Tos
SC	-	2SC5210-C	Si-npn	TV-Vid, 300V, 100mA, 500mW, 80MHz, B=55..110	SOT-89	20tb	-	4a	Ish
SC	-	KTC4377-C	Si-npn	Lo-sat, 30V, 2A, 500mW, B=300..450, 150MHz	SOT-89	20tb	-	4a	Kec
SCO	-	KSC2881-O	Si-npn	AF, Sw, 120V, 800mA, 500mW, B=300..450, >120MHz	SOT-89	20tb	-	4b	F
SCY	-	KSC2881-Y	Si-npn	AF, Sw, 120V, 800mA, 500mW, B=120..240, >120MHz	SOT-89	20tb	-	4b	F
SD	-	2SC2982-D	Si-npn	Lo-sat., 30V, 2A, 500mW, B=420..600, >140MHz	SOT-89	20tb	-	4b	Tos
SD	-	2SC5210-D	Si-npn	TV-Vid, 300V, 100mA, 500mW, 80MHz, B=90..180	SOT-89	20tb	-	4a	Ish
SD	-	KTC4377-D	Si-npn	Lo-sat, 30V, 2A, 500mW, B=240..600, 150MHz	SOT-89	20tb	-	4a	Kec
SDO	-	KSA1201-O	Si-pnp	AF, Sw, 120V, 800mA, 500mW, B=80..160, 120MHz	SOT-89	20tb	-	4b	F
SDY	-	KSA1201-Y	Si-pnp	AF, Sw, 120V, 800mA, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4g	F
SE	-	2SC4703-E	Si-npn	µWave, 25V, 150mA, 1.8W, 6GHz, B=125..250	SOT-89	20tb	-	4b	Nec
SE	-	2SC5210-E	Si-npn	TV-Vid, 300V, 100mA, 500mW, 80MHz, B=150..300	SOT-89	20tb	-	4a	Ish
SE	-	2SC5338-E	Si-npn	UHF, CATV, 25V, 150mA, 1.8W, 6GHz, B=125..250	SOT-89	20t8	-	4b	Nec
SE	-	SB05W05P	Si-diode	Dual, Schottky barrier rectifier, HF, 50V, 500mA, Vf<0.55V(500mA), 25pF, 10ns	PCP	20d1	-	4g	San
SF	-	2SC4703-F	Si-npn	µWave, 25V, 150mA, 1.8W, 6GHz, B=80..160	SOT-89	20tb	-	4b	Nec
SF	-	2SC5338-F	Si-npn	UHF, CATV, 25V, 150mA, 1.8W, 6GHz, B=80..160	SOT-89	20t8	-	4b	Nec
SGO	-	KSA1203-O	Si-pnp	AF, 30V, 1.5A, 500mW, B=100..200, 20MHz	SOT-89	20tb	-	4g	F
SGY	-	KSA1203-Y	Si-pnp	AF, 30V, 1.5A, 500mW, B=160..320, 20MHz	SOT-89	20tb	-	4g	F
SH	-	2SC4703-H	Si-npn	µWave, 25V, 150mA, 1.8W, 6GHz, B=50..100	SOT-89	20tb	-	4b	Nec
SH	-	2SC5338-H	Si-npn	UHF, CATV, 25V, 150mA, 1.8W, 6GHz, B=50..100	SOT-89	20t8	-	4b	Nec
SHO	-	KSC2883-O	Si-npn	AF-Drv, 30V, 1.5A, 500mW, B=100..200, >120MHz	SOT-89	20tb	-	4b	F
SHY	-	KSC2883-Y	Si-npn	AF-Drv, 30V, 1.5A, 500mW, B=160..320, >120MHz	SOT-89	20tb	-	4b	F
SK	-	2SC3554-K	Si-npn	HV, Sw, 300V, 200mA, 2W, 50MHz, B=160..250	SOT-89	20tb	-	4b	Nec
SL	-	2SC3554-L	Si-npn	HV, Sw, 300V, 200mA, 2W, 50MHz, B=100..200	SOT-89	20tb	-	4b	Nec
SLG	-	KSB798-G	Si-pnp	AF-Drv, 30V, 1A, 2W, B=200..400, >110MHz	SOT-89	20tb	-	4b	F
SLO	-	KSB798-O	Si-pnp	AF-Drv, 30V, 1A, 2W, B=90..180, >110MHz	SOT-89	20tb	-	4b	F
SLY	-	KSB798-Y	Si-pnp	AF-Drv, 30V, 1A, 2W, B=135..270, >110MHz	SOT-89	20tb	-	4b	F
SM	-	2SC3554-M	Si-npn	HV, Sw, 300V, 200mA, 2W, 50MHz, B=60..120	SOT-89	20tb	-	4b	Nec
SSA	-	KSC2982-A	Si-npn	AF-Drv, 30V, 2A, 500mW, B=140..240, >150MHz	SOT-89	20tb	-	4g	F
SSB	-	KSC2982-B	Si-npn	AF-Drv, 30V, 2A, 500mW, B=200..330, >150MHz	SOT-89	20tb	-	4g	F
SSC	-	KSC2982-C	Si-npn	AF-Drv, 30V, 2A, 500mW, B=300..450, >150MHz	SOT-89	20tb	-	4g	F
SSD	-	KSC2982-D	Si-npn	AF-Drv, 30V, 2A, 500mW, B=420..600, >150MHz	SOT-89	20tb	-	4g	F
SYR	-	KSD1621-R	Si-npn	AF-Drv, 30V, 2A, 500mW, B=100..200, >150MHz	SOT-89	20tb	-	4b	F
SYS	-	KSD1621-S	Si-npn	AF-Drv, 30V, 2A, 500mW, B=140..280, >150MHz	SOT-89	20tb	-	4b	F
SYT	-	KSD1621-T	Si-npn	AF-Drv, 30V, 2A, 500mW, B=200..400, >150MHz	SOT-89	20tb	-	4b	F
SYU	-	KSD1621-U	Si-npn	AF-Drv, 30V, 2A, 500mW, B=280..560, >150MHz	SOT-89	20tb	-	4b	F
SZR	-	KSB1121-R	Si-pnp	Lo-sat, 30V, 2A, 500mW, B=100..200, >150MHz	SOT-89	20tb	-	4b	F
SZS	-	KSB1121-S	Si-pnp	Lo-sat, 30V, 2A, 500mW, B=140..280, >150MHz	SOT-89	20tb	-	4b	F
SZT	-	KSB1121-T	Si-pnp	Lo-sat, 30V, 2A, 500mW, B=200..400, >150MHz	SOT-89	20tb	-	4b	F
SZU	-	KSB1121-U	Si-pnp	Lo-sat, 30V, 2A, 500mW, B=280..560, >150MHz	SOT-89	20tb	-	4b	F
T0	-	ELM9750CAB	Vdet-IC	5.0V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T1	-	ELM9751CAB	Vdet-IC	5.1V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
T2	-	ELM9752CAB	Vdet-IC	5.2V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
T3	-	ELM9753CAB	Vdet-IC	5.3V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
T4	-	ELM9754CAB	Vdet-IC	5.4V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
T5	-	ELM9755CAB	Vdet-IC	5.5V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
TA	-	2SA1314-A	Si-pnp	Lo-sat, 20V, 500mW, 500mW, B=140..280, 140MHz	SOT-89	20tb	-	4b	Tos
TAB	-	LN1250P122P	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAC	-	LN1250P132P	LVR-IC	LDO, 1.3V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAD	-	LN1250P142P	LVR-IC	LDO, 1.4V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAE	-	LN1250P152P	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAF	-	LN1250P162P	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAH	-	LN1250P172P	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAK	-	LN1250P182P	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAL	-	LN1250P192P	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAM	-	LN1250P202P	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAN	-	LN1250P212P	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAP	-	LN1250P222P	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAR	-	LN1250P232P	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAS	-	LN1250P242P	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAT	-	LN1250P252P	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAU	-	LN1250P262P	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAV	-	LN1250P272P	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAX	-	LN1250P282P	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAY	-	LN1250P292P	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TAZ	-	LN1250P302P	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TB	-	2SA1314-B	Si-pnp	Lo-sat, 20V, 500mW, 500mW, B=200..400, 140MHz	SOT-89	20tb	-	4b	Tos
TB	-	AP7365-08YR	LVR-IC	LDO, 0.8V±2%, 600mA	SOT-89	20vl	VR4	4ba	Di
TB0	-	LN1250P312P	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TB1	-	LN1250P322P	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TB2	-	LN1250P332P	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TB3	-	LN1250P342P	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TB4	-	LN1250P352P	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TB5	-	LN1250P362P	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TB6	-	LN1250P372P	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TB7	-	LN1250P382P	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TB8	-	LN1250P392P	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TB9	-	LN1250P402P	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBA	-	LN1250P412P	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBB	-	LN1250P422P	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBC	-	LN1250P432P	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBD	-	LN1250P442P	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBE	-	LN1250P452P	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBF	-	LN1250P462P	LVR-IC	LDO, 4.6V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBH	-	LN1250P472P	LVR-IC	LDO, 4.7V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBK	-	LN1250P482P	LVR-IC	LDO, 4.8V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBL	-	LN1250P492P	LVR-IC	LDO, 4,9V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBM	-	LN1250P502P	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBN	-	LN1250P512P	LVR-IC	LDO, 5.1V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBP	-	LN1250P522P	LVR-IC	LDO, 5.2V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBR	-	LN1250P532P	LVR-IC	LDO, 5.3V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBS	-	LN1250P542P	LVR-IC	LDO, 5.4V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBT	-	LN1250P552P	LVR-IC	LDO, 5.5V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBU	-	LN1250P562P	LVR-IC	LDO, 5.6V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBV	-	LN1250P572P	LVR-IC	LDO, 5.7V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBX	-	LN1250P582P	LVR-IC	LDO, 5.8V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBY	-	LN1250P592P	LVR-IC	LDO, 5.9V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TBZ	-	LN1250P602P	LVR-IC	LDO, 6.0V±2%, 500mA	SOT-89	20vl	VR1	4h	Nln
TC	-	2SA1314-C	Si-pnp	Lo-sat, 20V, 500mW, 500mW, B=300..600, 140MHz	SOT-89	20tb	-	4b	Tos
TC	-	AP7365-10YR	LVR-IC	LDO, 1.0V±2%, 600mA	SOT-89	20vl	VR4	4ba	Di
TD	-	2SC5211-D	Si-npn	AF-Amp-Drv, 55V, 400mA, 500mW, 150MHz, B=90..180	SOT-89	20tb	-	4a	Ish
TD	-	AP7365-12YR	LVR-IC	LDO, 1.2V±2%, 600mA	SOT-89	20vl	VR4	4ba	Di
TE	-	2SC5211-E	Si-npn	AF-Amp-Drv, 55V, 400mA, 500mW, 150MHz, B=150..300	SOT-89	20tb	-	4a	Ish
TE	-	2SD1702-E	Si-npn-Darl+Di	Driver, 60V, 800mA, 2W, B=8000..50000, 0.5/2.5µs	SOT-89	20tb	-	4g	Nec
TE	-	AP7365-15YR	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-89	20vl	VR4	4ba	Di
TF	-	2SC5211-F	Si-npn	AF-Amp-Drv, 55V, 400mA, 500mW, 150MHz, B=250..500	SOT-89	20tb	-	4a	Ish
TF	-	2SD1702-F	Si-npn-Darl+Di	Driver, 60V, 800mA, 2W, B=4000..12000, 0.5/2.5µs	SOT-89	20tb	-	4g	Nec
TF	-	AP7365-18YR	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-89	20vl	VR4	4ba	Di
TG	-	AP7365-20YR	LVR-IC	LDO, 2.0V±2%, 600mA	SOT-89	20vl	VR4	4ba	Di
TG	-	KTC4378-GR	Si-npn	Drv, 90V, 1A, 1W, B=160..320, 150MHz	SOT-89	20tb	-	4a	Kec
TH	-	AP7365-25YR	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-89	20vl	VR4	4ba	Di



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
TJ	-	AP7365-28YR	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-89	20vl	VR4	4ba	Di
TK	-	2SC3617-K	Si-npn	Hi-beta, 50V, 300mA, 500mW, 220MHz, B=2000..3200	SOT-89	20tb	-	4b	Nec
TK	-	AP7365-30YR	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-89	20vl	VR4	4ba	Di
TL	-	2SC3617-L	Si-npn	Hi-beta, 50V, 300mA, 500mW, 220MHz, B=1200..2400	SOT-89	20tb	-	4b	Nec
TM	-	2SC3617-M	Si-npn	Hi-beta, 50V, 300mA, 500mW, 220MHz, B=900..1600	SOT-89	20tb	-	4b	Nec
TM	-	AP7365-33YR	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-89	20vl	VR4	4ba	Di
TN	-	AP7365-39YR	LVR-IC	LDO, 3.9V±2%, 600mA	SOT-89	20vl	VR4	4ba	Di
TQ	-	2SD1119-Q	Si-npn	AF-Amp, 40V, 3A, 1W, 150MHz, B=230..380	SOT-89	20tb	-	4b	Pan
TQ	-	2SD1699-Q	Si-npn-Darl+Di	Driver, 100V, 1.6A, 2W, B=8000..50000	SOT-89	20tb	-	4b	Nec
TR	-	2SD1119-R	Si-npn	AF-Amp, 40V, 3A, 1W, 150MHz, B=340..600	SOT-89	20tb	-	4b	Pan
TR	-	2SD1699-R	Si-npn-Darl+Di	Driver, 100V, 1.6A, 2W, B=4000..12000	SOT-89	20tb	-	4b	Nec
TY	-	2SK2315	n-MOSFET	V-MOS, LogL, 60V, ±2A, <0.45Ω(2.5A)	SOT-89	20fa	-	4b	Ren
TY	-	KTC4378-Y	Si-npn	Drv, 90V, 1A, 1W, B=100..200, 150MHz	SOT-89	20tb	-	4a	Kec
U0	-	ELM9740CAB	Vdet-IC	4.0V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
U1	-	ELM9741CAB	Vdet-IC	4.1V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
U2	-	ELM9742CAB	Vdet-IC	4.2V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
U3	-	ELM9743CAB	Vdet-IC	4.3V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
U4	-	ELM9744CAB	Vdet-IC	4.4V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
U5	-	ELM9745CAB	Vdet-IC	4.5V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
U6	-	ELM9716CAB	Vdet-IC	1.6V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
U7	-	ELM9717CAB	Vdet-IC	1.7V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
U8	-	ELM9718CAB	Vdet-IC	1.8V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
U9	-	ELM9719CAB	Vdet-IC	1.9V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
UA1	-	2SJ357	p-MOSFET	V-MOS, LogL, 30V, ±3A, <0.2Ω(1.5A)	SOT-89	20fa	-	4b	Nec
UA2	-	2SJ358	p-MOSFET	V-MOS, LogL, 60V, ±3A, <0.3Ω(1.5A)	SOT-89	20fa	-	4b	Nec
UA3	-	2SJ462	p-MOSFET	V-MOS, LogL, 12V, ±2.5A, <0.19Ω	SOT-89	20fa	-	4b	Nec
UE	-	2SC5212-E	Si-npn	Relay-Drv, 25V, 1A, 500mW, 180MHz, B=150..300	SOT-89	20tb	-	4a	Ish
UF	-	2SC5212-F	Si-npn	Relay-Drv, 25V, 1A, 500mW, 180MHz, B=250..500	SOT-89	20tb	-	4a	Ish
UG	-	2SC5212-G	Si-npn	Relay-Drv, 25V, 1A, 500mW, 180MHz, B=400..800	SOT-89	20tb	-	4a	Ish
UK	-	2SC3618-K	Si-npn	AF-Amp, Sw, 25V, 1A, 2W, 250MHz, B=2000..3200	SOT-89	20tb	-	4b	Nec
UL	-	2SC3618-L	Si-npn	AF-Amp, Sw, 25V, 1A, 2W, 250MHz, B=1200..2400	SOT-89	20tb	-	4b	Nec
UM	-	2SC3618-M	Si-npn	AF-Amp, Sw, 25V, 1A, 2W, 250MHz, B=900..1600	SOT-89	20tb	-	4b	Nec
UO	-	KTC4379-O	Si-npn	AF, Sw, 50V, 2A, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4a	Kec
UPQ	-	2SC5824-Q	Si-npn	Sw, 60V, 3A, 500mW, B=120..270, 200MHz	MPT3	20tb	-	4b	Rhm
UPR	-	2SC5824-R	Si-npn	Sw, 60V, 3A, 500mW, B=180..390, 200MHz	MPT3	20tb	-	4b	Rhm
UY	-	2SJ450	p-MOSFET	V-MOS, LogL, 60V, 1A, <1.2Ω(0.5A)	SOT-89	20fa	-	4b	Ren
UY	-	KTC4379-Y	Si-npn	AF, Sw, 50V, 2A, 500mW, B=12..240, 120MHz	SOT-89	20tb	-	4a	Kec
V0	-	ELM9750CAB	Vdet-IC	5.0V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
V1	-	ELM9751CAB	Vdet-IC	5.1V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
V113A	-	FC6201P113P	LVR-IC	1.1V±3%, 250mA	SOT-89	20ch	VR1	4g	Fis
V113A	-	ML6201P113P	LVR-IC	1.1V±3%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V123A	-	FC6201P123P	LVR-IC	1.2V±3%, 250mA	SOT-89	20ch	VR1	4g	Fis
V123A	-	ML6201P123P	LVR-IC	1.2V±3%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V133A	-	FC6201P133P	LVR-IC	1.3V±3%, 250mA	SOT-89	20ch	VR1	4g	Fis
V133A	-	ML6201P133P	LVR-IC	1.3V±3%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V143A	-	FC6201P143P	LVR-IC	1.4V±3%, 250mA	SOT-89	20ch	VR1	4g	Fis
V143A	-	ML6201P143P	LVR-IC	1.4V±3%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V153A	-	FC6201P153P	LVR-IC	1.5V±3%, 250mA	SOT-89	20ch	VR1	4g	Fis
V153A	-	ML6201P153P	LVR-IC	1.5V±3%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V163A	-	FC6201P163P	LVR-IC	1.6V±3%, 250mA	SOT-89	20ch	VR1	4g	Fis
V163A	-	ML6201P163P	LVR-IC	1.6V±3%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V173A	-	FC6201P173P	LVR-IC	1.7V±3%, 250mA	SOT-89	20ch	VR1	4g	Fis
V173A	-	ML6201P173P	LVR-IC	1.7V±3%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V183A	-	FC6201P183P	LVR-IC	1.8V±3%, 250mA	SOT-89	20ch	VR1	4g	Fis
V183A	-	ML6201P183P	LVR-IC	1.8V±3%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V193A	-	FC6201P193P	LVR-IC	1.9V±3%, 250mA	SOT-89	20ch	VR1	4g	Fis
V193A	-	ML6201P193P	LVR-IC	1.9V±3%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V2	-	ELM9752CAB	Vdet-IC	5.2V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
V202A	-	FC6201P202P	LVR-IC	2.0V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V202A	-	ML6201P202P	LVR-IC	2.0V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V212A	-	FC6201P212P	LVR-IC	2.1V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V212A	-	ML6201P212P	LVR-IC	2.1V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V222A	-	FC6201P222P	LVR-IC	2.2V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V222A	-	ML6201P222P	LVR-IC	2.2V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V232A	-	FC6201P232P	LVR-IC	2.3V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V232A	-	ML6201P232P	LVR-IC	2.3V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V242A	-	FC6201P242P	LVR-IC	2.4V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V242A	-	ML6201P242P	LVR-IC	2.4V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V252A	-	FC6201P252P	LVR-IC	2.5V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V252A	-	ML6201P252P	LVR-IC	2.5V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V262A	-	FC6201P262P	LVR-IC	2.6V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V262A	-	ML6201P262P	LVR-IC	2.6V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V272A	-	FC6201P272P	LVR-IC	2.7V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V272A	-	ML6201P272P	LVR-IC	2.7V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V282A	-	FC6201P282P	LVR-IC	2.8V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V282A	-	ML6201P282P	LVR-IC	2.8V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V292A	-	FC6201P292P	LVR-IC	2.9V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V292A	-	ML6201P292P	LVR-IC	2.9V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V3	-	ELM9753CAB	Vdet-IC	5.3V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
V302A	-	FC6201P302P	LVR-IC	3.0V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V302A	-	ML6201P302P	LVR-IC	3.0V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V312A	-	FC6201P312P	LVR-IC	3.1V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V312A	-	ML6201P312P	LVR-IC	3.1V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V322A	-	FC6201P322P	LVR-IC	3.2V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V322A	-	ML6201P322P	LVR-IC	3.2V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V332A	-	FC6201P332P	LVR-IC	3.3V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V332A	-	ML6201P332P	LVR-IC	3.3V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V342A	-	FC6201P342P	LVR-IC	3.4V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V342A	-	ML6201P342P	LVR-IC	3.4V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V352A	-	FC6201P352P	LVR-IC	3.5V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V352A	-	ML6201P352P	LVR-IC	3.5V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V362A	-	FC6201P362P	LVR-IC	3.6V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V362A	-	ML6201P362P	LVR-IC	3.6V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V372A	-	FC6201P372P	LVR-IC	3.7V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V372A	-	ML6201P372P	LVR-IC	3.7V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V382A	-	FC6201P382P	LVR-IC	3.8V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V382A	-	ML6201P382P	LVR-IC	3.8V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V392A	-	FC6201P392P	LVR-IC	3.9V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V392A	-	ML6201P392P	LVR-IC	3.9V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V4	-	ELM9754CAB	Vdet-IC	5.4V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
V402A	-	FC6201P402P	LVR-IC	4.0V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V402A	-	ML6201P402P	LVR-IC	4.0V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V412A	-	FC6201P412P	LVR-IC	4.1V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V412A	-	ML6201P412P	LVR-IC	4.1V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V422A	-	FC6201P422P	LVR-IC	4.2V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V422A	-	ML6201P422P	LVR-IC	4.2V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V432A	-	FC6201P432P	LVR-IC	4.3V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V432A	-	ML6201P432P	LVR-IC	4.3V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V442A	-	FC6201P442P	LVR-IC	4.4V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V442A	-	ML6201P442P	LVR-IC	4.4V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V452A	-	FC6201P452P	LVR-IC	4.5V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V452A	-	ML6201P452P	LVR-IC	4.5V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V462A	-	FC6201P462P	LVR-IC	4.6V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V462A	-	ML6201P462P	LVR-IC	4.6V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V472A	-	FC6201P472P	LVR-IC	4.7V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V472A	-	ML6201P472P	LVR-IC	4.7V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V482A	-	FC6201P482P	LVR-IC	4.8V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V482A	-	ML6201P482P	LVR-IC	4.8V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V492A	-	FC6201P492P	LVR-IC	4.9V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V492A	-	ML6201P492P	LVR-IC	4.9V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V5	-	ELM9755CAB	Vdet-IC	5.5V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
V502A	-	FC6201P502P	LVR-IC	5.0V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V502A	-	ML6201P502P	LVR-IC	5.0V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V512A	-	FC6201P512P	LVR-IC	5.1V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V512A	-	ML6201P512P	LVR-IC	5.1V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V522A	-	FC6201P522P	LVR-IC	5.2V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V522A	-	ML6201P522P	LVR-IC	5.2V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V532A	-	FC6201P532P	LVR-IC	5.3V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V532A	-	ML6201P532P	LVR-IC	5.3V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V542A	-	FC6201P542P	LVR-IC	5.4V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V542A	-	ML6201P542P	LVR-IC	5.4V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V552A	-	FC6201P552P	LVR-IC	5.5V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V552A	-	ML6201P552P	LVR-IC	5.5V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V562A	-	FC6201P562P	LVR-IC	5.6V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V562A	-	ML6201P562P	LVR-IC	5.6V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V572A	-	FC6201P572P	LVR-IC	5.7V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V572A	-	ML6201P572P	LVR-IC	5.7V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V582A	-	FC6201P582P	LVR-IC	5.8V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V582A	-	ML6201P582P	LVR-IC	5.8V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V592A	-	FC6201P592P	LVR-IC	5.9V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V592A	-	ML6201P592P	LVR-IC	5.9V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
V602A	-	FC6201P602P	LVR-IC	6.0V±2%, 250mA	SOT-89	20ch	VR1	4g	Fis
V602A	-	ML6201P602P	LVR-IC	6.0V±2%, 250mA	SOT-89	20ch	VR1	4g	Mlc
VB	-	AP7365-08Y	LVR-IC	LDO, 0.8V±2%, 600mA	SOT-89	20ch	VR4	4ba	Di
VC	-	AP7365-10Y	LVR-IC	LDO, 1.0V±2%, 600mA	SOT-89	20ch	VR4	4ba	Di
VD	-	1SV268	PIN-diode	VHF/UHF, 50V,100mA, 0.7pF, 0.5Ω(470MHz)	SOT-89	20di	-	4a	San
VD	-	AP7365-12Y	LVR-IC	LDO, 1.2V±2%, 600mA	SOT-89	20ch	VR4	4ba	Di
VE	-	AP7365-15Y	LVR-IC	LDO, 1.5V±2%, 600mA	SOT-89	20ch	VR4	4ba	Di
VF	-	AP7365-18Y	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-89	20ch	VR4	4ba	Di
VG	-	AP7365-20Y	LVR-IC	LDO, 2.0V±2%, 600mA	SOT-89	20ch	VR4	4ba	Di
VH	-	AP7365-25Y	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-89	20ch	VR4	4ba	Di
VJ	-	AP7365-28Y	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-89	20ch	VR4	4ba	Di
VK	-	2SD1950-K	Si-npn	GP, Hi-beta, 30V, 2A, 2W, B=2000..3200, 350MHz	SOT-89	20tb	-	4b	Nec
VK	-	AP7365-30Y	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-89	20ch	VR4	4ba	Di
VL	-	2SD1950-L	Si-npn	GP, Hi-beta, 30V, 2A, 2W, B=1200..2400, 350MHz	SOT-89	20tb	-	4b	Nec
VM	-	2SD1950-M	Si-npn	GP, Hi-beta, 30V, 2A, 2W, B=800..1600, 350MHz	SOT-89	20tb	-	4b	Nec
VM	-	AP7365-33Y	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-89	20ch	VR4	4ba	Di
VN	-	AP7365-39Y	LVR-IC	LDO, 3.9V±2%, 600mA	SOT-89	20ch	VR4	4ba	Di
VO	-	2SC3803-O	Si-npn	Sw, 60/45V, 200mA, 1W, B=70..140, 200MHz	SOT-89	20tb	-	4b	Tos
VQ	-	2SD968A-Q	Si-npn	AF-Drv, 120V, 1A, 1W, B=90.155, 120MHz	SOT-89	20tb	-	4b	Pan
VR	-	2SC3803-R	Si-npn	Sw, 60/45V, 200mA, 1W, B=40..80, 200MHz	SOT-89	20tb	-	4b	Tos
VR	-	2SD968A-R	Si-npn	AF-Drv, 120V, 1A, 1W, B=130..220, 120MHz	SOT-89	20tb	-	4b	Pan
VY	-	2SC3803-Y	Si-npn	Sw, 60/45V, 200mA, 1W, B=140..280, 200MHz	SOT-89	20tb	-	4b	Tos
VY	-	2SK2788	n-MOSFET	V-MOS, LogL, 60V, 2A, <0.16Ω(5A)	SOT-89	20fa	-	4b	Ren
W0	-	ELM9730CAB	Vdet-IC	3.0V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
W1	-	ELM9731CAB	Vdet-IC	3.1V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
W2	-	BZV49-C0V8	Z-diode	0.8V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
W2	-	ELM9732CAB	Vdet-IC	3.2V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
W3	-	BZV49-C2V4	Z-diode	2.4V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
W3	-	ELM9733CAB	Vdet-IC	3.3V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
W4	-	BZV49-C2V7	Z-diode	2.7V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
W4	-	ELM9734CAB	Vdet-IC	3.4V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
W5	-	BZV49-C3V0	Z-diode	3V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
W5	-	ELM9735CAB	Vdet-IC	3.5V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
W6	-	BZV49-C3V3	Z-diode	3.3V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
W6	-	ELM9736CAB	Vdet-IC	3.6V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
W7	-	BZV49-C3V6	Z-diode	3.6V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
W7	-	ELM9737CAB	Vdet-IC	3.7V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
W8	-	BZV49-C3V9	Z-diode	3.9V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
W8	-	ELM9738CAB	Vdet-IC	3.8V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
W9	-	BZV49-C4V3	Z-diode	4.3V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
W9	-	ELM9739CAB	Vdet-IC	3.9V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
WC	-	2SC5214-C	Si-npn	AF-Amp-Drv, 30V, 1A, 500mW, 100MHz, B=55..110	SOT-89	20tb	-	4a	Ish
WD	-	2SC5214-D	Si-npn	AF-Amp-Drv, 30V, 1A, 500mW, 100MHz, B=90..180	SOT-89	20tb	-	4a	Ish
WE	-	2SC5214-E	Si-npn	AF-Amp-Drv, 30V, 1A, 500mW, 100MHz, B=150..300	SOT-89	20tb	-	4a	Ish
WO	-	2SA1483-O	Si-pnp	Sw, 60V, 200mA, 1W, B=70..140, >100MHz	SOT-89	20tb	-	4b	Tos
WO	-	KTA1666-O	Si-pnp	AF, Sw, 50V, 2A, 500mW, B=70..140, 120MHz	SOT-89	20tb	-	4a	Kec
WQ	-	2SD968-Q	Si-npn	AF-Drv, 100V, 1A, 1W, B=90.155, 120MHz	SOT-89	20tb	-	4b	Pan
WR	-	2SA1483-R	Si-pnp	Sw, 60V, 200mA, 1W, B=40..80, >100MHz	SOT-89	20tb	-	4b	Tos
WR	-	2SD968-R	Si-npn	AF-Drv, 100V, 1A, 1W, B=130..220, 120MHz	SOT-89	20tb	-	4b	Pan
WY	-	2SA1483-Y	Si-pnp	Sw, 60V, 200mA, 1W, B=120..240, >100MHz	SOT-89	20tb	-	4b	Tos
WY	-	2SJ484	p-MOSFET	V-MOS, LogL, 30V, 2A, 1W, <0.23Ω(1A)	SOT-89	20fi	-	4a	Ren
WY	-	KTA1666-Y	Si-pnp	AF, Sw, 50V, 2A, 500mW, B=120..240, 120MHz	SOT-89	20tb	-	4a	Kec
X0	jn	ELM7550NAB	Vdet-IC	5.0V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
X0	jo	ELM7550CAB	Vdet-IC	5.0V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
X1	-	BZV49-C27	Z-diode	27V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Zx
X1	-	CHS04XPT	Si-diode	SBD, 40V, 1A, Vf<0.55V(1A)	SOT-89	20dm	-	4g	Chm
X1	jn	ELM7551NAB	Vdet-IC	5.1V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
X1	jo	ELM7551CAB	Vdet-IC	5.1V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
X16C	-	SS6680C-16CX	Vdet-IC	1.6V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X16N	-	SS6680N-16CX	Vdet-IC	1.6V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X16P	-	SS6680P-16CX	Vdet-IC	1.6V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X17C	-	SS6680C-17CX	Vdet-IC	1.7V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X17N	-	SS6680N-17CX	Vdet-IC	1.7V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X17P	-	SS6680P-17CX	Vdet-IC	1.7V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X18C	-	SS6680C-18CX	Vdet-IC	1.8V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X18N	-	SS6680N-18CX	Vdet-IC	1.8V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X18P	-	SS6680P-18CX	Vdet-IC	1.8V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X19C	-	SS6680C-19CX	Vdet-IC	1.9V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X19N	-	SS6680N-19CX	Vdet-IC	1.9V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
X19P	-	SS6680P-19CX	Vdet-IC	1.9V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X2	-	BZV49-C30	Z-diode	30V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Zx
X2	jn	ELM7552NAB	Vdet-IC	5.2V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
X2	jo	ELM7552CAB	Vdet-IC	5.2V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
X20C	-	SS6680C-20CX	Vdet-IC	2.0V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X20N	-	SS6680N-20CX	Vdet-IC	2.0V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X20P	-	SS6680P-20CX	Vdet-IC	2.0V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X21C	-	SS6680C-21CX	Vdet-IC	2.1V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X21N	-	SS6680N-21CX	Vdet-IC	2.1V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X21P	-	SS6680P-21CX	Vdet-IC	2.1V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X22C	-	SS6680C-22CX	Vdet-IC	2.2V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X22N	-	SS6680N-22CX	Vdet-IC	2.2V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X22P	-	SS6680P-22CX	Vdet-IC	2.2V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X23C	-	SS6680C-23CX	Vdet-IC	2.3V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X23N	-	SS6680N-23CX	Vdet-IC	2.3V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X23P	-	SS6680P-23CX	Vdet-IC	2.3V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X24C	-	SS6680C-24CX	Vdet-IC	2.4V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X24N	-	SS6680N-24CX	Vdet-IC	2.4V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X24P	-	SS6680P-24CX	Vdet-IC	2.4V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X25C	-	SS6680C-25CX	Vdet-IC	2.5V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X25N	-	SS6680N-25CX	Vdet-IC	2.5V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X25P	-	SS6680P-25CX	Vdet-IC	2.5V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X26C	-	SS6680C-26CX	Vdet-IC	2.6V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X26N	-	SS6680N-26CX	Vdet-IC	2.6V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X26P	-	SS6680P-26CX	Vdet-IC	2.6V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X27C	-	SS6680C-27CX	Vdet-IC	2.7V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X27N	-	SS6680N-27CX	Vdet-IC	2.7V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X27P	-	SS6680P-27CX	Vdet-IC	2.7V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X28C	-	SS6680C-28CX	Vdet-IC	2.8V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X28N	-	SS6680N-28CX	Vdet-IC	2.8V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X28P	-	SS6680P-28CX	Vdet-IC	2.8V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X29C	-	SS6680C-29CX	Vdet-IC	2.9V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X29N	-	SS6680N-29CX	Vdet-IC	2.9V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X29P	-	SS6680P-29CX	Vdet-IC	2.9V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X3	-	BZV49-C33	Z-diode	33V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Zx
X3	jn	ELM7553NAB	Vdet-IC	5.3V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
X3	jo	ELM7553CAB	Vdet-IC	5.3V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
X30C	-	SS6680C-30CX	Vdet-IC	3.0V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X30N	-	SS6680N-30CX	Vdet-IC	3.0V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X30P	-	SS6680P-30CX	Vdet-IC	3.0V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X31C	-	SS6680C-31CX	Vdet-IC	3.1V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X31N	-	SS6680N-31CX	Vdet-IC	3.1V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X31P	-	SS6680P-31CX	Vdet-IC	3.1V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X32C	-	SS6680C-32CX	Vdet-IC	3.2V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X32N	-	SS6680N-32CX	Vdet-IC	3.2V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X32P	-	SS6680P-32CX	Vdet-IC	3.2V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X33C	-	SS6680C-33CX	Vdet-IC	3.3V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X33N	-	SS6680N-33CX	Vdet-IC	3.3V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X33P	-	SS6680P-33CX	Vdet-IC	3.3V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X34C	-	SS6680C-34CX	Vdet-IC	3.4V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X34N	-	SS6680N-34CX	Vdet-IC	3.4V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X34P	-	SS6680P-34CX	Vdet-IC	3.4V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X35C	-	SS6680C-35CX	Vdet-IC	3.5V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X35N	-	SS6680N-35CX	Vdet-IC	3.5V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X35P	-	SS6680P-35CX	Vdet-IC	3.5V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X36C	-	SS6680C-36CX	Vdet-IC	3.6V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X36N	-	SS6680N-36CX	Vdet-IC	3.6V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X36P	-	SS6680P-36CX	Vdet-IC	3.6V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X37C	-	SS6680C-37CX	Vdet-IC	3.7V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X37N	-	SS6680N-37CX	Vdet-IC	3.7V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X37P	-	SS6680P-37CX	Vdet-IC	3.7V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X38C	-	SS6680C-38CX	Vdet-IC	3.8V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X38N	-	SS6680N-38CX	Vdet-IC	3.8V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X38P	-	SS6680P-38CX	Vdet-IC	3.8V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X39C	-	SS6680C-39CX	Vdet-IC	3.9V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X39N	-	SS6680N-39CX	Vdet-IC	3.9V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X39P	-	SS6680P-39CX	Vdet-IC	3.9V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X4	-	BZV49-C36	Z-diode	36V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Zx
X4	jn	ELM7554NAB	Vdet-IC	5.4V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
X4	jo	ELM7554CAB	Vdet-IC	5.4V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
X40C	-	SS6680C-40CX	Vdet-IC	4.0V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X40N	-	SS6680N-40CX	Vdet-IC	4.0V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X40P	-	SS6680P-40CX	Vdet-IC	4.0V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X41C	-	SS6680C-41CX	Vdet-IC	4.1V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X41N	-	SS6680N-41CX	Vdet-IC	4.1V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X41P	-	SS6680P-41CX	Vdet-IC	4.1V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X42C	-	SS6680C-42CX	Vdet-IC	4.2V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X42N	-	SS6680N-42CX	Vdet-IC	4.2V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X42P	-	SS6680P-42CX	Vdet-IC	4.2V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X43C	-	SS6680C-43CX	Vdet-IC	4.3V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X43N	-	SS6680N-43CX	Vdet-IC	4.3V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X43P	-	SS6680P-43CX	Vdet-IC	4.3V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X44C	-	SS6680C-44CX	Vdet-IC	4.4V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X44N	-	SS6680N-44CX	Vdet-IC	4.4V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X44P	-	SS6680P-44CX	Vdet-IC	4.4V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X45C	-	SS6680C-45CX	Vdet-IC	4.5V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X45N	-	SS6680N-45CX	Vdet-IC	4.5V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X45P	-	SS6680P-45CX	Vdet-IC	4.5V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X46C	-	SS6680C-46CX	Vdet-IC	4.6V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X46N	-	SS6680N-46CX	Vdet-IC	4.6V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X46P	-	SS6680P-46CX	Vdet-IC	4.6V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X47C	-	SS6680C-47CX	Vdet-IC	4.7V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X47N	-	SS6680N-47CX	Vdet-IC	4.7V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X47P	-	SS6680P-47CX	Vdet-IC	4.7V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X48C	-	SS6680C-48CX	Vdet-IC	4.8V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X48N	-	SS6680N-48CX	Vdet-IC	4.8V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X48P	-	SS6680P-48CX	Vdet-IC	4.8V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X49C	-	SS6680C-49CX	Vdet-IC	4.9V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X49N	-	SS6680N-49CX	Vdet-IC	4.9V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X49P	-	SS6680P-49CX	Vdet-IC	4.9V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X5	-	BZV49-C39	Z-diode	39V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Zx
X5	jn	ELM7555NAB	Vdet-IC	5.5V±2%, +Reset ODO	SOT-89	20vda	VD6	4a	Elm
X5	jo	ELM7555CAB	Vdet-IC	5.5V±2%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
X50C	-	SS6680C-50CX	Vdet-IC	5.0V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X50N	-	SS6680N-50CX	Vdet-IC	5.0V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X50P	-	SS6680P-50CX	Vdet-IC	5.0V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X51C	-	SS6680C-51CX	Vdet-IC	5.1V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X51N	-	SS6680N-51CX	Vdet-IC	5.1V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X51P	-	SS6680P-51CX	Vdet-IC	5.1V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X52C	-	SS6680C-52CX	Vdet-IC	5.2V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X52N	-	SS6680N-52CX	Vdet-IC	5.2V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X52P	-	SS6680P-52CX	Vdet-IC	5.2V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X53C	-	SS6680C-53CX	Vdet-IC	5.3V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X53N	-	SS6680N-53CX	Vdet-IC	5.3V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X53P	-	SS6680P-53CX	Vdet-IC	5.3V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X54C	-	SS6680C-54CX	Vdet-IC	5.4V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X54N	-	SS6680N-54CX	Vdet-IC	5.4V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X54P	-	SS6680P-54CX	Vdet-IC	5.4V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X55C	-	SS6680C-55CX	Vdet-IC	5.5V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X55N	-	SS6680N-55CX	Vdet-IC	5.5V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X55P	-	SS6680P-55CX	Vdet-IC	5.5V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X56C	-	SS6680C-56CX	Vdet-IC	5.6V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X56N	-	SS6680N-56CX	Vdet-IC	5.6V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X56P	-	SS6680P-56CX	Vdet-IC	5.6V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X57C	-	SS6680C-57CX	Vdet-IC	5.7V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X57N	-	SS6680N-57CX	Vdet-IC	5.7V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X57P	-	SS6680P-57CX	Vdet-IC	5.7V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X58C	-	SS6680C-58CX	Vdet-IC	5.8V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X58N	-	SS6680N-58CX	Vdet-IC	5.8V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X58P	-	SS6680P-58CX	Vdet-IC	5.8V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X59C	-	SS6680C-59CX	Vdet-IC	5.9V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X59N	-	SS6680N-59CX	Vdet-IC	5.9V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X59P	-	SS6680P-59CX	Vdet-IC	5.9V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X6	-	BZV49-C43	Z-diode	43V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Zx
X60C	-	SS6680C-60CX	Vdet-IC	6.0V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4g	Ssc
X60N	-	SS6680N-60CX	Vdet-IC	6.0V±2.5%, +Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X60P	-	SS6680P-60CX	Vdet-IC	6.0V±2.5%, -Reset ODO	SOT-89	20vda	VD6	4g	Ssc
X7	-	BZV49-C47	Z-diode	47V±5%, Izt=2mA, 1W	SOT-89	20dm	-	4b	Zx
XA	-	KTB1124-A	Si-pnp	GP, 60V, 3A, 1W, B=100..200, 150MHz	SOT-89	20tb	-	4a	Kec
XAN	-	CHT2222XPT	Si-npn	AF, Sw, 40V, 600mA, B=100..300, 300MHz	SOT-89	20tb	-	4b	Chm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XAP	-	CHT2907XPT	Si-pnp	AF, Sw, 60V, 600mA, B=100..300, 200MHz	SOT-89	20tb	-	4g	Chm
XB	-	KTB1124-B	Si-pnp	GP, 60V, 3A, 1W, B=140..280, 150MHz	SOT-89	20tb	-	4a	Kec
XBN	-	CH3904XPT	Si-npn	AF, Sw, 40V, 200mA, B=100..300, 300MHz	SOT-89	20tb	-	4b	Chm
XBP	-	CH3906XPT	Si-pnp	AF, Sw, 40V, 200mA, B=100..300, 250MHz	SOT-89	20tb	-	4g	Chm
XC	-	KTB1124-C	Si-pnp	GP, 60V, 3A, 1W, B=200..400, 150MHz	SOT-89	20tb	-	4a	Kec
XCAR	-	YB1210ST8RR120	LVR-IC	LDO, ULN, 1.2V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCAS	-	YB1210ST89R120	LVR-IC	LDO, ULN, 1.2V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCBR	-	YB1210ST8RR130	LVR-IC	LDO, ULN, 1.3V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCBS	-	YB1210ST89R130	LVR-IC	LDO, ULN, 1.3V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCCR	-	YB1210ST8RR140	LVR-IC	LDO, ULN, 1.4V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCCS	-	YB1210ST89R140	LVR-IC	LDO, ULN, 1.4V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCDR	-	YB1210ST8RR150	LVR-IC	LDO, ULN, 1.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCDS	-	YB1210ST89R150	LVR-IC	LDO, ULN, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCER	-	YB1210ST8RR160	LVR-IC	LDO, ULN, 1.6V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCES	-	YB1210ST89R160	LVR-IC	LDO, ULN, 1.6V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCFR	-	YB1210ST8RR170	LVR-IC	LDO, ULN, 1.7V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCFS	-	YB1210ST89R170	LVR-IC	LDO, ULN, 1.7V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCGR	-	YB1210ST8RR180	LVR-IC	LDO, ULN, 1.8V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCGS	-	YB1210ST89R180	LVR-IC	LDO, ULN, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCHR	-	YB1210ST8RR190	LVR-IC	LDO, ULN, 1.9V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCHS	-	YB1210ST89R190	LVR-IC	LDO, ULN, 1.9V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCIR	-	YB1210ST8RR200	LVR-IC	LDO, ULN, 2.0V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCIS	-	YB1210ST89R200	LVR-IC	LDO, ULN, 2.0V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCJR	-	YB1210ST8RR210	LVR-IC	LDO, ULN, 2.1V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCJS	-	YB1210ST89R210	LVR-IC	LDO, ULN, 2.1V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCKR	-	YB1210ST8RR220	LVR-IC	LDO, ULN, 2.2V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCKS	-	YB1210ST89R220	LVR-IC	LDO, ULN, 2.2V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCLR	-	YB1210ST8RR230	LVR-IC	LDO, ULN, 2.3V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCLS	-	YB1210ST89R230	LVR-IC	LDO, ULN, 2.3V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCMR	-	YB1210ST8RR240	LVR-IC	LDO, ULN, 2.4V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCMS	-	YB1210ST89R240	LVR-IC	LDO, ULN, 2.4V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCN	-	CHT3019XPT	Si-npn	AF, Sw, 80V, 1A, B=100..300, 100MHz	SOT-89	20tb	-	4b	Chm
XCNR	-	YB1210ST8RR250	LVR-IC	LDO, ULN, 2.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCNS	-	YB1210ST89R250	LVR-IC	LDO, ULN, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCOR	-	YB1210ST8RR260	LVR-IC	LDO, ULN, 2.6V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCOS	-	YB1210ST89R260	LVR-IC	LDO, ULN, 2.6V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCP	-	CHT4033XPT	Si-pnp	AF, Sw, 80V, 1A, B=100..300, 100MHz	SOT-89	20tb	-	4g	Chm
XCPR	-	YB1210ST8RR270	LVR-IC	LDO, ULN, 2.7V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCPS	-	YB1210ST89R270	LVR-IC	LDO, ULN, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCQR	-	YB1210ST8RR280	LVR-IC	LDO, ULN, 2.8V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCQS	-	YB1210ST89R280	LVR-IC	LDO, ULN, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCRR	-	YB1210ST8RR290	LVR-IC	LDO, ULN, 2.9V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCRS	-	YB1210ST89R290	LVR-IC	LDO, ULN, 2.9V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCSR	-	YB1210ST8RR300	LVR-IC	LDO, ULN, 3.0V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCSS	-	YB1210ST89R300	LVR-IC	LDO, ULN, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCTR	-	YB1210ST8RR310	LVR-IC	LDO, ULN, 3.1V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCTS	-	YB1210ST89R310	LVR-IC	LDO, ULN, 3.1V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCUR	-	YB1210ST8RR320	LVR-IC	LDO, ULN, 3.2V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCUS	-	YB1210ST89R320	LVR-IC	LDO, ULN, 3.2V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCVR	-	YB1210ST8RR330	LVR-IC	LDO, ULN, 3.3V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCVS	-	YB1210ST89R330	LVR-IC	LDO, ULN, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCWR	-	YB1210ST8RR340	LVR-IC	LDO, ULN, 3.4V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCWS	-	YB1210ST89R340	LVR-IC	LDO, ULN, 3.4V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCXR	-	YB1210ST8RR350	LVR-IC	LDO, ULN, 3.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCXS	-	YB1210ST89R350	LVR-IC	LDO, ULN, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XCYR	-	YB1210ST8RR360	LVR-IC	LDO, ULN, 3.6V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
XCYS	-	YB1210ST89R360	LVR-IC	LDO, ULN, 3.6V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
XDN	-	CHT5551XPT	Si-npn	AF-Drv, 160V, 600mA, B=80..250, 100MHz	SOT-89	20tb	-	4b	Chm
XDP	-	CHT5401XPT	Si-pnp	AF-Drv, 150V, 500mA, B=60..240, 100MHz	SOT-89	20tb	-	4g	Chm
XEAR	-	YB1230ST8RX180	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XEAS	-	YB1230ST89X180	LVR-IC	LDO, 1.8V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XEBR	-	YB1230ST8RX190	LVR-IC	LDO, 1.9V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XEBS	-	YB1230ST89X190	LVR-IC	LDO, 1.9V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XECR	-	YB1230ST8RX200	LVR-IC	LDO, 2.0V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XECS	-	YB1230ST89X200	LVR-IC	LDO, 2.0V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XEDR	-	YB1230ST8RX210	LVR-IC	LDO, 2.1V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XEDS	-	YB1230ST89X210	LVR-IC	LDO, 2.1V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XEER	-	YB1230ST8RX220	LVR-IC	LDO, 2.2V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XEES	-	YB1230ST89X220	LVR-IC	LDO, 2.2V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XEFR	-	YB1230ST8RX230	LVR-IC	LDO, 2.3V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XEFS	-	YB1230ST89X230	LVR-IC	LDO, 2.3V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XEGR	-	YB1230ST8RX240	LVR-IC	LDO, 2.4V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XEGS	-	YB1230ST89X240	LVR-IC	LDO, 2.4V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XEHR	-	YB1230ST8RX250	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XEHS	-	YB1230ST89X250	LVR-IC	LDO, 2.5V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XEIR	-	YB1230ST8RX260	LVR-IC	LDO, 2.6V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XEIS	-	YB1230ST89X260	LVR-IC	LDO, 2.6V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XEJR	-	YB1230ST8RX270	LVR-IC	LDO, 2.7V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XEJS	-	YB1230ST89X270	LVR-IC	LDO, 2.7V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XEKR	-	YB1230ST8RX280	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XEKS	-	YB1230ST89X280	LVR-IC	LDO, 2.8V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XELR	-	YB1230ST8RX290	LVR-IC	LDO, 2.9V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XELS	-	YB1230ST89X290	LVR-IC	LDO, 2.9V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XEMR	-	YB1230ST8RX300	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XEMS	-	YB1230ST89X300	LVR-IC	LDO, 3.0V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XEN	-	CHTA14XPT	Si-npn-Darl	AF, Sw, 30V, 500mA, B>20000, 125MHz	SOT-89	20tb	-	4b	Chm
XENR	-	YB1230ST8RX310	LVR-IC	LDO, 3.1V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XENS	-	YB1230ST89X310	LVR-IC	LDO, 3.1V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XEP	-	CHTA64XPT	Si-pnp-Darl	AF, Sw, 30V, 500mA, B>20000, 125MHz	SOT-89	20tb	-	4g	Chm
XFN	-	CHTA42XPT	Si-npn	AF-Drv, 300V, 600mA, B>40, 50MHz	SOT-89	20tb	-	4b	Chm
XG	-	2SA1944	Si-pnp	Relay-Drv, 50V, 1A, 500mW, B=400..800, 90MHz	SOT-89	20tb	-	4a	Mit
XGN	-	CHTA27XPT	Si-npn-Darl	AF, Sw, 60V, 500mA, B>10000, 125MHz	SOT-89	20tb	-	4b	Chm
XJCR	-	YB1231ST8RX320	LVR-IC	LDO, 3.2V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XJCS	-	YB1231ST89X320	LVR-IC	LDO, 3.2V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XJDR	-	YB1231ST8RX330	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XJDS	-	YB1231ST89X330	LVR-IC	LDO, 3.3V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XJER	-	YB1231ST8RX340	LVR-IC	LDO, 3.4V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XJES	-	YB1231ST89X340	LVR-IC	LDO, 3.4V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XJFR	-	YB1231ST8RX350	LVR-IC	LDO, 3.5V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XJFS	-	YB1231ST89X350	LVR-IC	LDO, 3.5V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XJGR	-	YB1231ST8RX360	LVR-IC	LDO, 3.6V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XJGS	-	YB1231ST89X360	LVR-IC	LDO, 3.6V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XJHR	-	YB1231ST8RX370	LVR-IC	LDO, 3.7V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XJHS	-	YB1231ST89X370	LVR-IC	LDO, 3.7V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XJIR	-	YB1231ST8RX380	LVR-IC	LDO, 3.8V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XJIS	-	YB1231ST89X380	LVR-IC	LDO, 3.8V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XJJR	-	YB1231ST8RX390	LVR-IC	LDO, 3.9V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XJJS	-	YB1231ST89X390	LVR-IC	LDO, 3.9V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XJKR	-	YB1231ST8RX400	LVR-IC	LDO, 4.0V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XJKS	-	YB1231ST89X400	LVR-IC	LDO, 4.0V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XJLR	-	YB1231ST8RX410	LVR-IC	LDO, 4.1V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XJLS	-	YB1231ST89X410	LVR-IC	LDO, 4.1V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XJMR	-	YB1231ST8RX420	LVR-IC	LDO, 4.2V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XJMS	-	YB1231ST89X420	LVR-IC	LDO, 4.2V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XJNR	-	YB1231ST8RX430	LVR-IC	LDO, 4.3V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XJNS	-	YB1231ST89X430	LVR-IC	LDO, 4.3V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XJOR	-	YB1231ST8RX440	LVR-IC	LDO, 4.4V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XJOS	-	YB1231ST89X440	LVR-IC	LDO, 4.4V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XJPR	-	YB1231ST8RX450	LVR-IC	LDO, 4.5V±2%, 600mA	SOT-89	20ch	VR1	4g	Ybn
XJPS	-	YB1231ST89X450	LVR-IC	LDO, 4.5V±2%, 600mA	SOT-89	20vl	VR1	4g	Ybn
XK	-	2SD1614-K	Si-npn	AF, Sw, 40V, 2A, 2W, B=300..600, 200MHz	SOT-89	20tb	-	4b	Nec
XL	-	2SD1614-L	Si-npn	AF, Sw, 40V, 2A, 2W, B=200..400, 200MHz	SOT-89	20tb	-	4b	Nec
XM	-	2SD1614-M	Si-npn	AF, Sw, 40V, 2A, 2W, B=135..270, 200MHz	SOT-89	20tb	-	4b	Nec
XN	-	2SD1784	Si-npn-Darl	Sw, 30V, 1.5A, 1W, B>4000, 0.2/0.6µs	SOT-89	20tb	-	4g	Tos
XP	-	2SD875-P	Si-npn	AF, 80V, 1A, 1W, B=70..135, 120MHz	SOT-89	20tb	-	4b	Pan
XQ	-	2SD875-Q	Si-npn	AF, 80V, 1A, 1W, B=90..155, 120MHz	SOT-89	20tb	-	4b	Pan
XR	-	2SD875-R	Si-npn	AF, 80V, 1A, 1W, B=130..200, 120MHz	SOT-89	20tb	-	4b	Pan
XS	-	2SD875-S	Si-npn	AF, 80V, 1A, 1W, B=185..330, 120MHz	SOT-89	20tb	-	4b	Pan
Y0	-	ELM9720CAB	Vdet-IC	2.0V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
Y1	-	BZV49-C11	Z-diode	11V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Y1	-	ELM9721CAB	Vdet-IC	2.1V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
Y153A	-	FC6206S153P	LVR-IC	1.5V±3%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y153A	-	ML6206S153P	LVR-IC	1.5V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y163A	-	FC6206S163P	LVR-IC	1.6V±3%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y163A	-	ML6206S163P	LVR-IC	1.6V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y173A	-	FC6206S173P	LVR-IC	1.7V±3%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y173A	-	ML6206S173P	LVR-IC	1.7V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y1766	-	2SC1766PT-Y	Si-npn	AF, Sw, 50V, 2A, B=180..90, 120MHz	SOT-89	20tb	-	4b	Chm
Y183A	-	FC6206S183P	LVR-IC	1.8V±3%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y183A	-	ML6206S183P	LVR-IC	1.8V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Y193A	-	FC6206S193P	LVR-IC	1.9V±3%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y193A	-	ML6206S193P	LVR-IC	1.9V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y2	-	ELM9722CAB	Vdet-IC	2.2V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
Y202A	-	FC6206S202P	LVR-IC	2.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y202A	-	ML6206S202P	LVR-IC	2.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y212A	-	FC6206S212P	LVR-IC	2.1V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y212A	-	ML6206S212P	LVR-IC	2.1V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y222A	-	FC6206S222P	LVR-IC	2.2V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y222A	-	ML6206S222P	LVR-IC	2.2V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y232A	-	FC6206S232P	LVR-IC	2.3V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y232A	-	ML6206S232P	LVR-IC	2.3V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y242A	-	FC6206S242P	LVR-IC	2.4V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y242A	-	ML6206S242P	LVR-IC	2.4V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y252A	-	FC6206S252P	LVR-IC	2.5V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y252A	-	ML6206S252P	LVR-IC	2.5V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y262A	-	FC6206S262P	LVR-IC	2.6V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y262A	-	ML6206S262P	LVR-IC	2.6V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y272A	-	FC6206S272P	LVR-IC	2.7V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y272A	-	ML6206S272P	LVR-IC	2.7V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y282A	-	FC6206S282P	LVR-IC	2.8V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y282A	-	ML6206S282P	LVR-IC	2.8V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y292A	-	FC6206S292P	LVR-IC	2.9V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y292A	-	ML6206S292P	LVR-IC	2.9V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y3	-	BZV49-C13	Z-diode	13V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Y3	-	ELM9723CAB	Vdet-IC	2.3V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
Y302A	-	FC6206S302P	LVR-IC	3.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y302A	-	ML6206S302P	LVR-IC	3.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y312A	-	FC6206S312P	LVR-IC	3.1V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y312A	-	ML6206S312P	LVR-IC	3.1V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y322A	-	FC6206S322P	LVR-IC	3.2V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y322A	-	ML6206S322P	LVR-IC	3.2V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y332A	-	FC6206S332P	LVR-IC	3.3V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y332A	-	ML6206S332P	LVR-IC	3.3V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y342A	-	FC6206S342P	LVR-IC	3.4V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y342A	-	ML6206S342P	LVR-IC	3.4V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y352A	-	FC6206S352P	LVR-IC	3.5V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y352A	-	ML6206S352P	LVR-IC	3.5V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y362A	-	FC6206S362P	LVR-IC	3.6V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y362A	-	ML6206S362P	LVR-IC	3.6V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y372A	-	FC6206S372P	LVR-IC	3.7V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y372A	-	ML6206S372P	LVR-IC	3.7V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y382A	-	FC6206S382P	LVR-IC	3.8V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y382A	-	ML6206S382P	LVR-IC	3.8V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y392A	-	FC6206S392P	LVR-IC	3.9V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y392A	-	ML6206S392P	LVR-IC	3.9V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y4	-	BZV49-C15	Z-diode	15V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Y4	-	ELM9724CAB	Vdet-IC	2.4V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
Y402A	-	FC6206S402P	LVR-IC	4.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y402A	-	ML6206S402P	LVR-IC	4.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y412A	-	FC6206S412P	LVR-IC	4.1V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y412A	-	ML6206S412P	LVR-IC	4.1V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y422A	-	FC6206S422P	LVR-IC	4.2V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y422A	-	ML6206S422P	LVR-IC	4.2V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y432A	-	FC6206S432P	LVR-IC	4.3V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y432A	-	ML6206S432P	LVR-IC	4.3V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y442A	-	FC6206S442P	LVR-IC	4.4V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y442A	-	ML6206S442P	LVR-IC	4.4V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y452A	-	FC6206S452P	LVR-IC	4.5V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y452A	-	ML6206S452P	LVR-IC	4.5V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y462A	-	FC6206S462P	LVR-IC	4.6V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y462A	-	ML6206S462P	LVR-IC	4.6V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y472A	-	FC6206S472P	LVR-IC	4.7V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y472A	-	ML6206S472P	LVR-IC	4.7V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y482A	-	FC6206S482P	LVR-IC	4.8V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y482A	-	ML6206S482P	LVR-IC	4.8V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y492A	-	FC6206S492P	LVR-IC	4.9V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis
Y492A	-	ML6206S492P	LVR-IC	4.9V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y5	-	BZV49-C16	Z-diode	16V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Y5	-	ELM9725CAB	Vdet-IC	2.5V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
Y502A	-	FC6206S502P	LVR-IC	5.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Fis



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Y502A	-	ML6206S502P	LVR-IC	5.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Y6	-	BZV49-C18	Z-diode	18V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Y6	-	ELM9726CAB	Vdet-IC	2.6V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
Y7	-	BZV49-C20	Z-diode	20V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Y7	-	ELM9727CAB	Vdet-IC	2.7V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
Y8	-	BZV49-C22	Z-diode	22V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Y8	-	ELM9728CAB	Vdet-IC	2.8V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
Y9	-	BZV49-C24	Z-diode	24V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Y9	-	ELM9729CAB	Vdet-IC	2.9V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
YA	-	KTD1624-A	Si-npn	Drv, 60V, 3A, 500mW, B=100..200, 150MHz	SOT-89	20tb	-	4a	Kec
YA	-	RN6001	Si-pnp-Digi	Drv, 30V, 2A, 120MHz, R2=2k	SOT-89	20tb	-	4b	Tos
YB	-	2SK680A	n-MOSFET	Sw, 30V, 1A, 2W, Rds=0.6Ω(500mA), 12..44ns	SOT-89	20fi	-	4g	Nec
YB	-	KTD1624-B	Si-npn	Drv, 60V, 3A, 500mW, B=140..280, 150MHz	SOT-89	20tb	-	4a	Kec
YC	-	KTD1624-C	Si-npn	Drv, 60V, 3A, 500mW, B=200..400, 150MHz	SOT-89	20tb	-	4a	Kec
YD2R	-	LSP2132ST8RX440	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YD2S	-	LSP2132ST89X440	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YD3R	-	LSP2132ST8RX450	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YD3S	-	LSP2132ST89X450	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YD4R	-	LSP2132ST8RX460	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YD4S	-	LSP2132ST89X460	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YD5R	-	LSP2132ST8RX470	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YD5S	-	LSP2132ST89X470	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YD6R	-	LSP2132ST8RX470	LVR-IC	LDO, 4.75V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YD6S	-	LSP2132ST89X470	LVR-IC	LDO, 4.75V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YD7R	-	LSP2132ST8RX480	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YD7S	-	LSP2132ST89X480	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YD8R	-	LSP2132ST8RX490	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YD8S	-	LSP2132ST89X490	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YD9R	-	LSP2132ST8RX500	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YD9S	-	LSP2132ST89X500	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDaR	-	LSP2132ST8RX380	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDAR	-	LSP2132ST8RX120	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDAR	-	YB1253ST8RX120	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDaS	-	LSP2132ST89X380	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDAS	-	LSP2132ST89X120	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDAS	-	YB1253ST89X120	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDbR	-	LSP2132ST8RX390	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDBR	-	LSP2132ST8RX130	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDBR	-	YB1253ST8RX130	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDbS	-	LSP2132ST89X390	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDBS	-	LSP2132ST89X130	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDBS	-	YB1253ST89X130	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDCR	-	LSP2132ST8RX140	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDCR	-	YB1253ST8RX140	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDCS	-	LSP2132ST89X140	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDCS	-	YB1253ST89X140	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDdR	-	LSP2132ST8RX400	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDDR	-	LSP2132ST8RX150	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDDR	-	YB1253ST8RX150	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDdS	-	LSP2132ST89X400	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDDS	-	LSP2132ST89X150	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDDS	-	YB1253ST89X150	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDeR	-	LSP2132ST8RX410	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDER	-	LSP2132ST8RX160	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDER	-	YB1253ST8RX160	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDeS	-	LSP2132ST89X410	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDES	-	LSP2132ST89X160	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDES	-	YB1253ST89X160	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDfR	-	LSP2132ST8RX420	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDFR	-	LSP2132ST8RX170	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDFR	-	YB1253ST8RX170	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDfS	-	LSP2132ST89X420	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDFS	-	LSP2132ST89X170	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDFS	-	YB1253ST89X170	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDgR	-	LSP2132ST8RX430	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDGR	-	LSP2132ST8RX180	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDGR	-	YB1253ST8RX180	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDgS	-	LSP2132ST89X430	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDGS	-	LSP2132ST89X180	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDGS	-	YB1253ST89X180	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
YDHR	-	LSP2132ST8RX190	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDHR	-	YB1253ST8RX190	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDHS	-	LSP2132ST89X190	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDHS	-	YB1253ST89X190	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDIR	-	LSP2132ST8RX200	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDIR	-	YB1253ST8RX200	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDIS	-	LSP2132ST89X200	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDIS	-	YB1253ST89X200	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDJR	-	LSP2132ST8RX210	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDJR	-	YB1253ST8RX210	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDJS	-	LSP2132ST89X210	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDJS	-	YB1253ST89X210	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDKR	-	LSP2132ST8RX220	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDKR	-	YB1253ST8RX220	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDKS	-	LSP2132ST89X220	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDKS	-	YB1253ST89X220	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDLR	-	LSP2132ST8RX230	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDLR	-	YB1253ST8RX230	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDLS	-	LSP2132ST89X230	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDLS	-	YB1253ST89X230	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDMR	-	LSP2132ST8RX240	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDMR	-	YB1253ST8RX240	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDMS	-	LSP2132ST89X240	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDMS	-	YB1253ST89X240	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDNR	-	LSP2132ST8RX250	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDNR	-	YB1253ST8RX250	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDNS	-	LSP2132ST89X250	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDNS	-	YB1253ST89X250	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDOR	-	LSP2132ST8RX260	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDOR	-	YB1253ST8RX260	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDOS	-	LSP2132ST89X260	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDOS	-	YB1253ST89X260	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDPR	-	LSP2132ST8RX270	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDPR	-	YB1253ST8RX270	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDPS	-	LSP2132ST89X270	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDPS	-	YB1253ST89X270	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDQR	-	LSP2132ST8RX280	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDQR	-	YB1253ST8RX280	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDQS	-	LSP2132ST89X280	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDQS	-	YB1253ST89X280	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDRR	-	LSP2132ST8RX290	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDRR	-	YB1253ST8RX290	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDRS	-	LSP2132ST89X290	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDRS	-	YB1253ST89X290	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDSR	-	LSP2132ST8RX300	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDSR	-	YB1253ST8RX300	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDSS	-	LSP2132ST89X300	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDSS	-	YB1253ST89X300	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDTR	-	LSP2132ST8RX310	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDTR	-	YB1253ST8RX310	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDTS	-	LSP2132ST89X310	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDTS	-	YB1253ST89X310	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDUR	-	LSP2132ST8RX320	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDUR	-	YB1253ST8RX320	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDUS	-	LSP2132ST89X320	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDUS	-	YB1253ST89X320	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDVR	-	LSP2132ST8RX330	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDVR	-	YB1253ST8RX330	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDVS	-	LSP2132ST89X330	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDVS	-	YB1253ST89X330	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDWR	-	LSP2132ST8RX340	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDWR	-	YB1253ST8RX340	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDWS	-	LSP2132ST89X340	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDWS	-	YB1253ST89X340	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDXR	-	LSP2132ST8RX350	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDXR	-	YB1253ST8RX350	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn
YDXS	-	LSP2132ST89X350	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YDXS	-	YB1253ST89X350	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-89	20vl	VR1	4g	Ybn
YDYR	-	LSP2132ST8RX360	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDYR	-	YB1253ST8RX360	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-89	20ch	VR1	4g	Ybn



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
YDZR	-	LSP2132ST8RX370	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20ch	VR1	4g	Jbs
YDZS	-	LSP2132ST89X370	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-89	20vl	VR1	4g	Jbs
YE	-	2SC3728-E	Si-npn+Di	Driver, 20V, 2A, 500mW, 80MHz, B=150..300	SOT-89	20tb	-	4a	Mit
YF	-	2SC3728-F	Si-npn+Di	Driver, 20V, 2A, 500mW, 80MHz, B=250..500	SOT-89	20tb	-	4a	Mit
YG	-	2SC3728-G	Si-npn+Di	Driver, 20V, 2A, 500mW, 80MHz, B=400..800	SOT-89	20tb	-	4a	Mit
YK	-	2SB1115-K	Si-pnp	AF-Amp, Sw, 60V, 1A, 2W, 120MHz, B=300..600	SOT-89	20tb	-	4a	Nec
YL	-	2SB1115-L	Si-pnp	AF-Amp, Sw, 60V, 1A, 2W, 120MHz, B=200..400	SOT-89	20tb	-	4a	Nec
YM	-	2SB1115-M	Si-pnp	AF-Amp, Sw, 60V, 1A, 2W, 120MHz, B=135..270	SOT-89	20tb	-	4a	Nec
YP	-	2SB1115A-P	Si-pnp	AF-Amp, Sw, 80V, 1A, 2W, 120MHz, B=200..400	SOT-89	20tb	-	4a	Nec
YQ	-	2SB1115A-Q	Si-pnp	AF-Amp, Sw, 80V, 1A, 2W, 120MHz, B=135..270	SOT-89	20tb	-	4a	Nec
YQ	-	2SD874A-Q	Si-npn	GP, AF, 60V, 1A, 1W, B=85..170, 200MHz	SOT-89	20tb	-	4b	Pan
YR	-	2SD874A-R	Si-npn	GP, AF, 60V, 1A, 1W, B=120..240, 200MHz	SOT-89	20tb	-	4b	Pan
YS	-	2SD874A-S	Si-npn	GP, AF, 60V, 1A, 1W, B=170..340, 200MHz	SOT-89	20tb	-	4b	Pan
YY	-	2SJ517	p-MOSFET	V-MOS, LogL, 20V, 2A, <0.24Ω(5A)	SOT-89	20fa	-	4b	Ren
Z1	-	BZV49-C4V7	Z-diode	4.7V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Z153A	-	ML6206P153P	LVR-IC	1.5V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z163A	-	ML6206P163P	LVR-IC	1.6V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z173A	-	ML6206P173P	LVR-IC	1.7V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z183A	-	ML6206P183P	LVR-IC	1.8V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z193A	-	ML6206P193P	LVR-IC	1.9V±3%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z2	-	BZV49-C5V1	Z-diode	5.1V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Z202A	-	ML6206P202P	LVR-IC	2.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z20C	-	RH5RZ20CA	LVR-IC	LDO, LN, 2V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z212A	-	ML6206P212P	LVR-IC	2.1V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z21C	-	RH5RZ21CA	LVR-IC	LDO, LN, 2.1V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z222A	-	ML6206P222P	LVR-IC	2.2V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z22C	-	RH5RZ22CA	LVR-IC	LDO, LN, 2.2V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z232A	-	ML6206P232P	LVR-IC	2.3V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z23C	-	RH5RZ23CA	LVR-IC	LDO, LN, 2.3V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z242A	-	ML6206P242P	LVR-IC	2.4V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z24C	-	RH5RZ24CA	LVR-IC	LDO, LN, 2.4V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z252A	-	ML6206P252P	LVR-IC	2.5V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z25C	-	RH5RZ25CA	LVR-IC	LDO, LN, 2.5V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z262A	-	ML6206P262P	LVR-IC	2.6V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z26C	-	RH5RZ26CA	LVR-IC	LDO, LN, 2.6V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z272A	-	ML6206P272P	LVR-IC	2.7V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z27C	-	RH5RZ27CA	LVR-IC	LDO, LN, 2.7V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z282A	-	ML6206P282P	LVR-IC	2.8V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z28C	-	RH5RZ28CA	LVR-IC	LDO, LN, 2.8V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z292A	-	ML6206P292P	LVR-IC	2.9V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z29C	-	RH5RZ29CA	LVR-IC	LDO, LN, 2.9V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z3	-	2SK1078	n-MOSFET	LogL, 60V, 800mA, 900mW, <0.55Ω, 9/55ns	SOT-89	20fa	-	4g	Tos
Z3	-	BZV49-C5V6	Z-diode	5.6V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Z302A	-	ML6206P302P	LVR-IC	3.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z30C	-	RH5RZ30CA	LVR-IC	LDO, LN, 3V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z312A	-	ML6206P312P	LVR-IC	3.1V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z31C	-	RH5RZ31CA	LVR-IC	LDO, LN, 3.1V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z322A	-	ML6206P322P	LVR-IC	3.2V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z32C	-	RH5RZ32CA	LVR-IC	LDO, LN, 3.2V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z332A	-	ML6206P332P	LVR-IC	3.3V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z33C	-	RH5RZ33CA	LVR-IC	LDO, LN, 3.3V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z342A	-	ML6206P342P	LVR-IC	3.4V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z34C	-	RH5RZ34CA	LVR-IC	LDO, LN, 3.4V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z352A	-	ML6206P352P	LVR-IC	3.5V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z35C	-	RH5RZ35CA	LVR-IC	LDO, LN, 3.5V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z362A	-	ML6206P362P	LVR-IC	3.6V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z36C	-	RH5RZ36CA	LVR-IC	LDO, LN, 3.6V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z372A	-	ML6206P372P	LVR-IC	3.7V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z37C	-	RH5RZ37CA	LVR-IC	LDO, LN, 3.7V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z382A	-	ML6206P382P	LVR-IC	3.8V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z38C	-	RH5RZ38CA	LVR-IC	LDO, LN, 3.8V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z392A	-	ML6206P392P	LVR-IC	3.9V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z39C	-	RH5RZ39CA	LVR-IC	LDO, LN, 3.9V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z4	-	2SK1079	n-MOSFET	LogL, 100V, 600mA, 500mW, <0.95Ω, 9/75ns	SOT-89	20fa	-	4g	Tos
Z4	-	BZV49-C6V2	Z-diode	6.2V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Z402A	-	ML6206P402P	LVR-IC	4.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z40C	-	RH5RZ40CA	LVR-IC	LDO, LN, 4V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z412A	-	ML6206P412P2	LVR-IC	4.1V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z41C	-	RH5RZ41CA	LVR-IC	LDO, LN, 4.1V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z422A	-	ML6206P422P	LVR-IC	4.2V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Z42C	-	RH5RZ42CA	LVR-IC	LDO, LN, 4.2V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z432A	-	ML6206P432P	LVR-IC	4.3V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z43C	-	RH5RZ43CA	LVR-IC	LDO, LN, 4.3V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z442A	-	ML6206P442P	LVR-IC	4.4V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z44C	-	RH5RZ44CA	LVR-IC	LDO, LN, 4.4V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z452A	-	ML6206P452P	LVR-IC	4.5V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z45C	-	RH5RZ45CA	LVR-IC	LDO, LN, 4.5V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z462A	-	ML6206P462P	LVR-IC	4.6V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z46C	-	RH5RZ46CA	LVR-IC	LDO, LN, 4.6V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z472A	-	ML6206P472P	LVR-IC	4.7V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z47C	-	RH5RZ47CA	LVR-IC	LDO, LN, 4.7V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z482A	-	ML6206P482P	LVR-IC	4.8V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z48C	-	RH5RZ48CA	LVR-IC	LDO, LN, 4.8V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z492A	-	ML6206P492P	LVR-IC	4.9V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z49C	-	RH5RZ49CA	LVR-IC	LDO, LN, 4.9V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z5	-	2SK1717	n-MOSFET	V-MOS, LogL, 60V, 2A, 500mW, 0.37Ω(10V), 60/135ns	SOT-89	20fi	-	4g	Tos
Z5	-	BZV49-C6V8	Z-diode	6.8V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Z502A	-	ML6206P502P	LVR-IC	5.0V±2%, 250mA	SOT-89	20vl	VR1	4g	Mlc
Z50C	-	RH5RZ50CA	LVR-IC	LDO, LN, 5V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z51C	-	RH5RZ51CA	LVR-IC	LDO, LN, 5.1V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z52C	-	RH5RZ52CA	LVR-IC	LDO, LN, 5.2V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z53C	-	RH5RZ53CA	LVR-IC	LDO, LN, 5.3V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z54C	-	RH5RZ54CA	LVR-IC	LDO, LN, 5.4V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z55C	-	RH5RZ55CA	LVR-IC	LDO, LN, 5.5V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z56C	-	RH5RZ56CA	LVR-IC	LDO, LN, 5.6V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z57C	-	RH5RZ57CA	LVR-IC	LDO, LN, 5.7V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z58C	-	RH5RZ58CA	LVR-IC	LDO, LN, 5.8V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z59C	-	RH5RZ59CA	LVR-IC	LDO, LN, 5.9V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z6	-	2SJ238	p-MOSFET	V-MOS, LogL, 60V, 1A, <0.85Ω(0.5A)	SOT-89	20fa	-	4b	Tos
Z6	-	BZV49-C7V5	Z-diode	7.5V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Z6	-	ELM9716CAB	Vdet-IC	1.6V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
Z60C	-	RH5RZ60CA	LVR-IC	LDO, LN, 6V±2%, 100mA	SOT-89	20vl	VR1	4c	Ric
Z7	-	2SK2549	n-MOSFET	V-MOS, LogL, 16V, 2A, <0.29Ω(2.5A)	SOT-89	20fa	-	4b	Tos
Z7	-	BZV49-C8V2	Z-diode	8.2V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Z7	-	ELM9717CAB	Vdet-IC	1.7V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
Z8	-	2SJ360	p-MOSFET	V-MOS, LogL, 60V, 1A, <0.73Ω(0.5A)	SOT-89	20fa	-	4b	Tos
Z8	-	BZV49-C9V1	Z-diode	9.1V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Z8	-	ELM9718CAB	Vdet-IC	1.8V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
Z9	-	2SJ465	p-MOSFET	V-MOS, LogL, 16V, 2A, <0.71Ω(5A)	SOT-89	20fa	-	4b	Tos
Z9	-	BZV49-C10	Z-diode	10V±5%, Izt=5mA, 1W	SOT-89	20dm	-	4b	Zx
Z9	-	ELM9719CAB	Vdet-IC	1.9V±2.5%, +Reset PPO	SOT-89	20vda	VD7	4a	Elm
ZA	-	2SK2615	n-MOSFET	V-MOS, LogL, 60V, 2A, <0.44Ω(5A)	SOT-89	20fa	-	4b	Tos
ZC	-	2SK2964	n-MOSFET	V-MOS, LogL, 30V, 2A, <0.25Ω(5A)	SOT-89	20fa	-	4b	Tos
ZD	-	2SA1945-D	Si-pnp	GP, Drv, 55V, 400mA, 500mW, B=90..180, 150MHz	SOT-89	20tb	-	4a	Mit
ZD	-	2SK2992	n-MOSFET	V-MOS, 200V, 1A, <3.5Ω(0.5A), 17/45ns	SOT-89	20fa	-	4b	Tos
ZE	-	2SA1945-E	Si-pnp	GP, Drv, 55V, 400mA, 500mW, B=150..300, 150MHz	SOT-89	20tb	-	4a	Mit
ZF	-	2SA1945-F	Si-pnp	GP, Drv, 55V, 400mA, 500mW, B=250..500, 150MHz	SOT-89	20tb	-	4a	Mit
ZF	-	2SJ511	p-MOSFET	V-MOS, 30V, 2A, <0.76Ω(5A)	SOT-89	20fa	-	4b	Tos
ZFP	-	CHTA92XPT	Si-pnp	Vid, Drv, 300V, 500mA, B>40, 50MHz	SOT-89	20tb	-	4g	Chm
ZG	-	KTD1898-G	Si-npn	GP, 100V, 1A, 500mW, B=200..400, 100MHz	SOT-89	20tb	-	4a	Kec
ZGR	-	KTD1898-GR	Si-npn	AF-Drv, 100V, 1A, 500mW, B=200..400, 100MHz	SOT-89	20tb	-	4a	Kec
ZK	-	2SB1114-K	Si-pnp	AF-Amp, Sw, 20V, 2A, 2W, 180MHz, B=135..270	SOT-89	20tb	-	4a	Nec
ZL	-	2SB1114-L	Si-pnp	AF-Amp, Sw, 20V, 2A, 2W, 180MHz, B=200..400	SOT-89	20tb	-	4a	Nec
ZLP	-	2SB1260-P	Si-pnp	AF, 80V, 1A, 500mW, B=82..180, >80MHz	SOT-89	20tb	-	4b	Wtr
ZLQ	-	2SB1260-Q	Si-pnp	AF, 80V, 1A, 500mW, B=120..270, >80MHz	SOT-89	20tb	-	4b	Wtr
ZLR	-	2SB1260-R	Si-pnp	AF, 80V, 1A, 500mW, B=180..390, >80MHz	SOT-89	20tb	-	4b	Wtr
ZM	-	2SB1114-M	Si-pnp	AF-Amp, Sw, 20V, 2A, 2W, 180MHz, B=300..600	SOT-89	20tb	-	4a	Nec
ZO	-	KTD1898-O	Si-npn	GP, 100V, 1A, 500mW, B=70..140, 100MHz	SOT-89	20tb	-	4a	Kec
ZP	-	2SB1301-P	Si-pnp	AF, Sw, 20V, 3A, 2W, B=135..200, 100MHz	SOT-89	20tb	-	4b	Nec
ZQ	-	2SB1301-Q	Si-pnp	AF, Sw, 20V, 3A, 2W, B=200..300, 100MHz	SOT-89	20tb	-	4b	Nec
ZQ	-	2SD874-Q	Si-npn	GP, AF, 30V, 1A, 1W, B=85..170, 200MHz	SOT-89	20tb	-	4b	Pan
ZR	-	2SB1301-R	Si-pnp	AF, Sw, 20V, 3A, 2W, B=300..600, 100MHz	SOT-89	20tb	-	4b	Nec
ZR	-	2SD874-R	Si-npn	GP, AF, 30V, 1A, 1W, B=120..240, 200MHz	SOT-89	20tb	-	4b	Pan
ZR	-	KTD1898-R	Si-npn	AF-Drv, 100V, 1A, 500mW, B=120..240, 100MHz	SOT-89	20tb	-	4a	Kec
ZS	-	2SD874-S	Si-npn	GP, AF, 30V, 1A, 1W, B=170..340, 200MHz	SOT-89	20tb	-	4b	Pan
ZX	-	2SB1628-X	Si-pnp	AF-Amp, Sw, 20V, 3A, 2W, 320MHz, B=140..280	SOT-89	20tb	-	4b	Nec
ZY	-	2SB1628-Y	Si-pnp	AF-Amp, Sw, 20V, 3A, 2W, 320MHz, B=200..400	SOT-89	20tb	-	4b	Nec
ZY	-	2SK2978	n-MOSFET	V-MOS, LogL, 20V, 2.5A, <0.12Ω	SOT-89	20fa	-	4b	Ren
ZY	-	KTD1898-Y	Si-npn	GP, 100V, 1A, 500mW, B=120..240, 100MHz	SOT-89	20tb	-	4a	Kec
ZZ	-	2SB1628-Z	Si-pnp	AF-Amp, Sw, 20V, 3A, 2W, 320MHz, B=280..560	SOT-89	20tb	-	4b	Nec











SECTION 6

4-pin case SMD semiconductor components

0
1
2
3
4
5
6
7
8
9
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
-	gc	ELM7548NCB	Vdet-IC	4.8V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
-	gd	ELM7548CCB	Vdet-IC	4.8V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
#	gc	ELM7541NCB	Vdet-IC	4.1V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
#	gd	ELM7541CCB	Vdet-IC	4.1V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
%MY	-	BF1100	n-MOSFET	Dual gate, VHF, UHF, 14V, 30mA, 200mW	SOT-143	24fd	-	5c	Phi
%MZ	-	BF1100R	n-MOSFET	Dual gate, VHF, UHF, 14V, 30mA, 200mW	SOT-143R	26fm	-	5c	Phi
*****	gc	ELM7546NCB	Vdet-IC	4.6V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
*****	gd	ELM7546CCB	Vdet-IC	4.6V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
/	gc	ELM7554NCB	Vdet-IC	5.4V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
/	gd	ELM7554CCB	Vdet-IC	5.4V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
+	gc	ELM7547NCB	Vdet-IC	4.7V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
+	gd	ELM7547CCB	Vdet-IC	4.7V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
<	gc	ELM7553NCB	Vdet-IC	5.3V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
<	gd	ELM7553CCB	Vdet-IC	5.3V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
=	gc	ELM7544NCB	Vdet-IC	4.4V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
=	gd	ELM7544CCB	Vdet-IC	4.4V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
>	gc	ELM7549NCB	Vdet-IC	4.9V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
>	gd	ELM7549CCB	Vdet-IC	4.9V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
0.	gc	ELM7552NCB	Vdet-IC	5.2V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
0.	gd	ELM7552CCB	Vdet-IC	5.2V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
00	-	AP8822C-40GI	Vdet-IC	4.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
00	-	AP8822C-40GS	Vdet-IC	4.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
00	-	AP8822C-40PI	Vdet-IC	4.0V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
00	-	AP8822C-40PS	Vdet-IC	4.0V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
00	-	XC6127N55ANR	Vdet-IC	5.5V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
00	-	XC6221C081NR	LVR-IC	LDO, 0.8V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
00	-	XC6225A12ANR-G	LVR-IC	LDO, 1.25V±30mV, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
01	-	AP8822C-41GI	Vdet-IC	4.1V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
01	-	AP8822C-41GS	Vdet-IC	4.1V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
01	-	AP8822C-41PI	Vdet-IC	4.1V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
01	-	AP8822C-41PS	Vdet-IC	4.1V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
01	-	MRF9011	Si-npn	UHF, 25V, 30mA, 300mW, B=30..200, 3.8GHz	SOT-143	24tc	-	5c	Mot
01	-	XC6221C091NR	LVR-IC	LDO, 0.9V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
01	-	XC6225A132NR-G	LVR-IC	LDO, 1.3V±30mV, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
02	-	AP8822C-42GI	Vdet-IC	4.2V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
02	-	AP8822C-42GS	Vdet-IC	4.2V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
02	-	AP8822C-42PI	Vdet-IC	4.2V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
02	-	AP8822C-42PS	Vdet-IC	4.2V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
02	-	MRF5711	Si-npn	UHF, 20V, 80mA, 580mW, B=50..300, 8GHz	SOT-143	24tc	-	5c	Mot
02	-	XC6221C101NR	LVR-IC	LDO, 1.0V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
02	-	XC6225A13ANR-G	LVR-IC	LDO, 1.35V±30mV, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
03	-	AP8822C-43GI	Vdet-IC	4.3V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
03	-	AP8822C-43GS	Vdet-IC	4.3V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
03	-	AP8822C-43PI	Vdet-IC	4.3V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
03	-	AP8822C-43PS	Vdet-IC	4.3V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
03	-	VAM-3	MMIC	RF amplifier, DC..2GHz, 7.5dB (50Ω)	SOT-143	24aa	A1	5c	Mc
03	-	XC6221C111NR	LVR-IC	LDO, 1.1V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
03	-	XC6225A142NR-G	LVR-IC	LDO, 1.4V±30mV, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
04	-	AP8822C-44GI	Vdet-IC	4.4V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
04	-	AP8822C-44GS	Vdet-IC	4.4V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
04	-	AP8822C-44PI	Vdet-IC	4.4V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
04	-	AP8822C-44PS	Vdet-IC	4.4V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
04	-	MRF4427	Si-npn	UHF, 40V, 400mA, 220mW, B=10..200, 1.6GHz	SOT-143	24tc	-	5c	Mot
04	-	MRF5211	Si-pnp	UHF, 20V, 70mA, 333mW, B=25..125, 4.2GHz	SOT-143	24tc	-	5c	Mot
04	-	XC6221C121NR	LVR-IC	LDO, 1.2V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
04	-	XC6225A14ANR-G	LVR-IC	LDO, 1.45V±30mV, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
05	-	AP8822C-45GI	Vdet-IC	4.5V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
05	-	AP8822C-45GS	Vdet-IC	4.5V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
05	-	AP8822C-45PI	Vdet-IC	4.5V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
05	-	AP8822C-45PS	Vdet-IC	4.5V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
05	-	MRF9331	Si-npn	UHF, 15V, 2mA, 50mW, B=30..200, 5GHz	SOT-143	24tc	-	5c	Mot
05	-	XC6221C131NR	LVR-IC	LDO, 1.3V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
05	-	XC6225A152NR-G	LVR-IC	LDO, 1.5V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
05F	-	TSDF1205R	Si-npn	UHF-VHF, LN, 9V, 12mA, 40mW, B=50..250, 12GHz	SOT-143R	26tu	-	5b	Vs
06	-	AP8822C-46GI	Vdet-IC	4.6V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
06	-	AP8822C-46GS	Vdet-IC	4.6V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
06	-	AP8822C-46PI	Vdet-IC	4.6V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
06	-	AP8822C-46PS	Vdet-IC	4.6V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
06	-	VAM-6	MMIC	RF amplifier, DC..2GHz, 8dB (50Ω)	SOT-143	24aa	A1	5c	Mc
06	-	XC6221C141NR	LVR-IC	LDO, 1.4V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
06	-	XC6225A15ANR-G	LVR-IC	LDO, 1.55V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
07	-	AP8822C-47GI	Vdet-IC	4.7V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
07	-	AP8822C-47GS	Vdet-IC	4.7V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
07	-	AP8822C-47PI	Vdet-IC	4.7V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
07	-	AP8822C-47PS	Vdet-IC	4.7V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
07	-	VAM-7	MMIC	RF amplifier, DC..2GHz, 7.8dB (50Ω)	SOT-143	24aa	A1	5c	Mc
07	-	XC6221C151NR	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
07	-	XC6225A162NR-G	LVR-IC	LDO, 1.6V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
08	-	AP8822C-48GI	Vdet-IC	4.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
08	-	AP8822C-48GS	Vdet-IC	4.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
08	-	AP8822C-48PI	Vdet-IC	4.8V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
08	-	AP8822C-48PS	Vdet-IC	4.8V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
08	-	HBFP-0450	Si-npn	UHF, LN, 15V, 100mA, 450mW, B=50..150, 1.8GHz	SOT-343	24t1	-	5c	Agi
08	-	XC6221C161NR	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
08	-	XC6225A16ANR-G	LVR-IC	LDO, 1.65V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0808A	-	EC8908-08AC7	LVR-IC	LDO, 0.8V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0808B	-	EC8908-08BC7	LVR-IC	LDO, 0.8V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0808C	-	EC8908-08CC7	LVR-IC	LDO, 0.8V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0808D	-	EC8908-08DC7	LVR-IC	LDO, 0.8V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0809A	-	EC8908-09AC7	LVR-IC	LDO, 0.9V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0809B	-	EC8908-09BC7	LVR-IC	LDO, 0.9V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0809C	-	EC8908-09CC7	LVR-IC	LDO, 0.9V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0809D	-	EC8908-09DC7	LVR-IC	LDO, 0.9V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0810A	-	EC8908-10AC7	LVR-IC	LDO, 1.0V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0810B	-	EC8908-10BC7	LVR-IC	LDO, 1.0V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0810C	-	EC8908-10CC7	LVR-IC	LDO, 1.0V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0810D	-	EC8908-10DC7	LVR-IC	LDO, 1.0V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0811A	-	EC8908-11AC7	LVR-IC	LDO, 1.1V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0811B	-	EC8908-11BC7	LVR-IC	LDO, 1.1V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0811C	-	EC8908-11CC7	LVR-IC	LDO, 1.1V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0811D	-	EC8908-11DC7	LVR-IC	LDO, 1.1V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0812A	-	EC8908-12AC7	LVR-IC	LDO, 1.2V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0812B	-	EC8908-12BC7	LVR-IC	LDO, 1.2V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0812C	-	EC8908-12CC7	LVR-IC	LDO, 1.2V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0812D	-	EC8908-12DC7	LVR-IC	LDO, 1.2V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0813A	-	EC8908-13AC7	LVR-IC	LDO, 1.3V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0813B	-	EC8908-13BC7	LVR-IC	LDO, 1.3V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0813C	-	EC8908-13CC7	LVR-IC	LDO, 1.3V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0813D	-	EC8908-13DC7	LVR-IC	LDO, 1.3V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0814A	-	EC8908-14AC7	LVR-IC	LDO, 1.4V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0814B	-	EC8908-14BC7	LVR-IC	LDO, 1.4V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0814C	-	EC8908-14CC7	LVR-IC	LDO, 1.4V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0814D	-	EC8908-14DC7	LVR-IC	LDO, 1.4V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0815A	-	EC8908-15AC7	LVR-IC	LDO, 1.5V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0815B	-	EC8908-15BC7	LVR-IC	LDO, 1.5V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0815C	-	EC8908-15CC7	LVR-IC	LDO, 1.5V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0815D	-	EC8908-15DC7	LVR-IC	LDO, 1.5V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0816A	-	EC8908-16AC7	LVR-IC	LDO, 1.6V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0816B	-	EC8908-16BC7	LVR-IC	LDO, 1.6V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0816C	-	EC8908-16CC7	LVR-IC	LDO, 1.6V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0816D	-	EC8908-16DC7	LVR-IC	LDO, 1.6V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0817A	-	EC8908-17AC7	LVR-IC	LDO, 1.7V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0817B	-	EC8908-17BC7	LVR-IC	LDO, 1.7V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0817C	-	EC8908-17CC7	LVR-IC	LDO, 1.7V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0817D	-	EC8908-17DC7	LVR-IC	LDO, 1.7V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0818A	-	EC8908-18AC7	LVR-IC	LDO, 1.8V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0818B	-	EC8908-18BC7	LVR-IC	LDO, 1.8V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0818C	-	EC8908-18CC7	LVR-IC	LDO, 1.8V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0818D	-	EC8908-18DC7	LVR-IC	LDO, 1.8V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0819A	-	EC8908-19AC7	LVR-IC	LDO, 1.9V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0819B	-	EC8908-19BC7	LVR-IC	LDO, 1.9V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0819C	-	EC8908-19CC7	LVR-IC	LDO, 1.9V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0819D	-	EC8908-19DC7	LVR-IC	LDO, 1.9V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0820A	-	EC8908-20AC7	LVR-IC	LDO, 2.0V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0820B	-	EC8908-20BC7	LVR-IC	LDO, 2.0V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0820C	-	EC8908-20CC7	LVR-IC	LDO, 2.0V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0820D	-	EC8908-20DC7	LVR-IC	LDO, 2.0V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0821A	-	EC8908-21AC7	LVR-IC	LDO, 2.1V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0821B	-	EC8908-21BC7	LVR-IC	LDO, 2.1V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0821C	-	EC8908-21CC7	LVR-IC	LDO, 2.1V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0821D	-	EC8908-21DC7	LVR-IC	LDO, 2.1V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0822A	-	EC8908-22AC7	LVR-IC	LDO, 2.2V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0822B	-	EC8908-22BC7	LVR-IC	LDO, 2.2V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0822C	-	EC8908-22CC7	LVR-IC	LDO, 2.2V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0822D	-	EC8908-22DC7	LVR-IC	LDO, 2.2V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0823A	-	EC8908-23AC7	LVR-IC	LDO, 2.3V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0823B	-	EC8908-23BC7	LVR-IC	LDO, 2.3V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0823C	-	EC8908-23CC7	LVR-IC	LDO, 2.3V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0823D	-	EC8908-23DC7	LVR-IC	LDO, 2.3V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0824A	-	EC8908-24AC7	LVR-IC	LDO, 2.4V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0824B	-	EC8908-24BC7	LVR-IC	LDO, 2.4V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0824C	-	EC8908-24CC7	LVR-IC	LDO, 2.4V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0824D	-	EC8908-24DC7	LVR-IC	LDO, 2.4V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0825A	-	EC8908-25AC7	LVR-IC	LDO, 2.5V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0825B	-	EC8908-25BC7	LVR-IC	LDO, 2.5V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0825C	-	EC8908-25CC7	LVR-IC	LDO, 2.5V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0825D	-	EC8908-25DC7	LVR-IC	LDO, 2.5V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0826A	-	EC8908-26AC7	LVR-IC	LDO, 2.6V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0826B	-	EC8908-26BC7	LVR-IC	LDO, 2.6V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0826C	-	EC8908-26CC7	LVR-IC	LDO, 2.6V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0826D	-	EC8908-26DC7	LVR-IC	LDO, 2.6V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0827A	-	EC8908-27AC7	LVR-IC	LDO, 2.7V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0827B	-	EC8908-27BC7	LVR-IC	LDO, 2.7V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0827C	-	EC8908-27CC7	LVR-IC	LDO, 2.7V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0827D	-	EC8908-27DC7	LVR-IC	LDO, 2.7V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0828A	-	EC8908-28AC7	LVR-IC	LDO, 2.8V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0828B	-	EC8908-28BC7	LVR-IC	LDO, 2.8V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0828C	-	EC8908-28CC7	LVR-IC	LDO, 2.8V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0828D	-	EC8908-28DC7	LVR-IC	LDO, 2.8V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0829A	-	EC8908-29AC7	LVR-IC	LDO, 2.9V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0829B	-	EC8908-29BC7	LVR-IC	LDO, 2.9V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0829C	-	EC8908-29CC7	LVR-IC	LDO, 2.9V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0829D	-	EC8908-29DC7	LVR-IC	LDO, 2.9V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0830A	-	EC8908-30AC7	LVR-IC	LDO, 3.0V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0830B	-	EC8908-30BC7	LVR-IC	LDO, 3.0V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0830C	-	EC8908-30CC7	LVR-IC	LDO, 3.0V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0830D	-	EC8908-30DC7	LVR-IC	LDO, 3.0V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0831A	-	EC8908-31AC7	LVR-IC	LDO, 3.1V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0831B	-	EC8908-31BC7	LVR-IC	LDO, 3.1V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0831C	-	EC8908-31CC7	LVR-IC	LDO, 3.1V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0831D	-	EC8908-31DC7	LVR-IC	LDO, 3.1V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0832A	-	EC8908-32AC7	LVR-IC	LDO, 3.2V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0832B	-	EC8908-32BC7	LVR-IC	LDO, 3.2V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0832C	-	EC8908-32CC7	LVR-IC	LDO, 3.2V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0832D	-	EC8908-32DC7	LVR-IC	LDO, 3.2V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0833A	-	EC8908-33AC7	LVR-IC	LDO, 3.3V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0833B	-	EC8908-33BC7	LVR-IC	LDO, 3.3V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0833C	-	EC8908-33CC7	LVR-IC	LDO, 3.3V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0833D	-	EC8908-33DC7	LVR-IC	LDO, 3.3V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0834A	-	EC8908-34AC7	LVR-IC	LDO, 3.4V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0834B	-	EC8908-34BC7	LVR-IC	LDO, 3.4V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0834C	-	EC8908-34CC7	LVR-IC	LDO, 3.4V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0834D	-	EC8908-34DC7	LVR-IC	LDO, 3.4V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0835A	-	EC8908-35AC7	LVR-IC	LDO, 3.5V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0835B	-	EC8908-35BC7	LVR-IC	LDO, 3.5V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0835C	-	EC8908-35CC7	LVR-IC	LDO, 3.5V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0835D	-	EC8908-35DC7	LVR-IC	LDO, 3.5V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0836A	-	EC8908-36AC7	LVR-IC	LDO, 3.6V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0836B	-	EC8908-36BC7	LVR-IC	LDO, 3.6V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0836C	-	EC8908-36CC7	LVR-IC	LDO, 3.6V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0836D	-	EC8908-36DC7	LVR-IC	LDO, 3.6V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0837A	-	EC8908-37AC7	LVR-IC	LDO, 3.7V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0837B	-	EC8908-37BC7	LVR-IC	LDO, 3.7V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0837C	-	EC8908-37CC7	LVR-IC	LDO, 3.7V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0837D	-	EC8908-37DC7	LVR-IC	LDO, 3.7V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0838A	-	EC8908-38AC7	LVR-IC	LDO, 3.8V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0838B	-	EC8908-38BC7	LVR-IC	LDO, 3.8V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0838C	-	EC8908-38CC7	LVR-IC	LDO, 3.8V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0838D	-	EC8908-38DC7	LVR-IC	LDO, 3.8V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0839A	-	EC8908-39AC7	LVR-IC	LDO, 3.9V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0839B	-	EC8908-39BC7	LVR-IC	LDO, 3.9V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0839C	-	EC8908-39CC7	LVR-IC	LDO, 3.9V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0839D	-	EC8908-39DC7	LVR-IC	LDO, 3.9V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0840A	-	EC8908-40AC7	LVR-IC	LDO, 4.0V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0840B	-	EC8908-40BC7	LVR-IC	LDO, 4.0V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0840C	-	EC8908-40CC7	LVR-IC	LDO, 4.0V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0840D	-	EC8908-40DC7	LVR-IC	LDO, 4.0V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0841A	-	EC8908-41AC7	LVR-IC	LDO, 4.1V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0841B	-	EC8908-41BC7	LVR-IC	LDO, 4.1V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0841C	-	EC8908-41CC7	LVR-IC	LDO, 4.1V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0841D	-	EC8908-41DC7	LVR-IC	LDO, 4.1V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0842A	-	EC8908-42AC7	LVR-IC	LDO, 4.2V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0842B	-	EC8908-42BC7	LVR-IC	LDO, 4.2V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0842C	-	EC8908-42CC7	LVR-IC	LDO, 4.2V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0842D	-	EC8908-42DC7	LVR-IC	LDO, 4.2V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0843A	-	EC8908-43AC7	LVR-IC	LDO, 4.3V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0843B	-	EC8908-43BC7	LVR-IC	LDO, 4.3V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0843C	-	EC8908-43CC7	LVR-IC	LDO, 4.3V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0843D	-	EC8908-43DC7	LVR-IC	LDO, 4.3V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0844A	-	EC8908-44AC7	LVR-IC	LDO, 4.4V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0844B	-	EC8908-44BC7	LVR-IC	LDO, 4.4V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0844C	-	EC8908-44CC7	LVR-IC	LDO, 4.4V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0844D	-	EC8908-44DC7	LVR-IC	LDO, 4.4V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0845A	-	EC8908-45AC7	LVR-IC	LDO, 4.5V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0845B	-	EC8908-45BC7	LVR-IC	LDO, 4.5V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0845C	-	EC8908-45CC7	LVR-IC	LDO, 4.5V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0845D	-	EC8908-45DC7	LVR-IC	LDO, 4.5V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0846A	-	EC8908-46AC7	LVR-IC	LDO, 4.6V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0846B	-	EC8908-46BC7	LVR-IC	LDO, 4.6V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0846C	-	EC8908-46CC7	LVR-IC	LDO, 4.6V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0846D	-	EC8908-46DC7	LVR-IC	LDO, 4.6V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0847A	-	EC8908-47AC7	LVR-IC	LDO, 4.7V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0847B	-	EC8908-47BC7	LVR-IC	LDO, 4.7V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0847C	-	EC8908-47CC7	LVR-IC	LDO, 4.7V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0847D	-	EC8908-47DC7	LVR-IC	LDO, 4.7V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
0848A	-	EC8908-48AC7	LVR-IC	LDO, 4.8V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0848B	-	EC8908-48BC7	LVR-IC	LDO, 4.8V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
0848C	-	EC8908-48CC7	LVR-IC	LDO, 4.8V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
084HA	-	EC8908-4HAC7	LVR-IC	LDO, 4.75V±1.5%, 300mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
084HB	-	EC8908-4HBC7	LVR-IC	LDO, 4.75V±1.5%, 500mA, +CE	SC-82-4	26vn	VR4	5e	Ecm
084HC	-	EC8908-4HCC7	LVR-IC	LDO, 4.75V±1.5%, 300mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
084HD	-	EC8908-4HDC7	LVR-IC	LDO, 4.75V±1.5%, 500mA, -CE	SC-82-4	26vn	VR4	5e	Ecm
085	-	LN3526N0812M	Vdet-IC	0.8V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
086	-	LN3526N0842M	Vdet-IC	0.8V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
087	-	LN3526N0852M	Vdet-IC	0.8V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
09	-	AP8822C-49GI	Vdet-IC	4.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
09	-	AP8822C-49GS	Vdet-IC	4.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
09	-	AP8822C-49PI	Vdet-IC	4.9V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
09	-	AP8822C-49PS	Vdet-IC	4.9V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
09	-	R3111Q091B	Vdet-IC	0.9V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
09	-	XC6221C171NR	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
09	-	XC6225A172NR-G	LVR-IC	LDO, 1.7V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
095	-	LN3526N0912M	Vdet-IC	0.9V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
096	-	LN3526N0942M	Vdet-IC	0.9V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
097	-	LN3526N0952M	Vdet-IC	0.9V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
0A	-	BU4317F	Vdet-IC	1.7V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0A	-	R3132Q10EA	Vdet-IC	1V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0A	-	RQ5RW50BA	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
0A	-	XC6127N15ANR	Vdet-IC	1.5V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0A	-	XC6221A411NR	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0A	-	XC6221C181NR	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0A	-	XC6501C421NR-G	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0B	-	BU4318F	Vdet-IC	1.8V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0B	-	R3132Q11EA	Vdet-IC	1.1V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0B	-	RQ5RW51BA	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
0B	-	XC6127N17ANR	Vdet-IC	1.7V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0B	-	XC6221A421NR	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0B	-	XC6221C191NR	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0B	-	XC6501C42ANR-G	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0C	-	BU4319F	Vdet-IC	1.9V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0C	-	R3132Q12EA	Vdet-IC	1.2V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0C	-	RQ5RW52BA	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
0C	-	XC6127N19ANR	Vdet-IC	1.9V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0C	-	XC6221A431NR	LVR-IC	LDO, 4.3V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0C	-	XC6221C201NR	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0C	-	XC6501C431NR-G	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0D	-	BU4320F	Vdet-IC	2.0V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0D	-	R3132Q13EA	Vdet-IC	1.3V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0D	-	RQ5RW53BA	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
0D	-	XC6127N21ANR	Vdet-IC	2.1V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0D	-	XC6221A441NR	LVR-IC	LDO, 4.4V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0D	-	XC6221C211NR	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0D	-	XC6501C43ANR-G	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0E	-	BU4321F	Vdet-IC	2.1V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0E	-	R3132Q14EA	Vdet-IC	1.4V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0E	-	RQ5RW54BA	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
0E	-	XC6127N23ANR	Vdet-IC	2.3V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0E	-	XC6221A451NR	LVR-IC	LDO, 4.5V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0E	-	XC6221C221NR	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0E	-	XC6501C441NR-G	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0F	-	BU4322F	Vdet-IC	2.2V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0F	-	R3132Q15EA	Vdet-IC	1.5V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0F	-	RQ5RW55BA	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
0F	-	XC6127N25ANR	Vdet-IC	2.5V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0F	-	XC6221A461NR	LVR-IC	LDO, 4.6V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0F	-	XC6221C231NR	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0F	-	XC6501C44ANR-G	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0G	-	BU4323F	Vdet-IC	2.3V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0G	-	R3132Q16EA	Vdet-IC	1.6V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0G	-	RQ5RW56BA	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
0H	-	BU4324F	Vdet-IC	2.4V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0H	-	R3132Q17EA	Vdet-IC	1.7V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0H	-	RQ5RW57BA	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
0H	-	XC6127N27ANR	Vdet-IC	2.7V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0H	-	XC6221A471NR	LVR-IC	LDO, 4.7V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0H	-	XC6221C241NR	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0H	-	XC6501C451NR-G	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0J	-	BU4325F	Vdet-IC	2.5V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0J	-	R3132Q18EA	Vdet-IC	1.8V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0J	-	RQ5RW58BA	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
0K	-	BU4326F	Vdet-IC	2.6V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0K	-	R3132Q19EA	Vdet-IC	1.9V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0K	-	RQ5RW59BA	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
0K	-	XC6127N29ANR	Vdet-IC	2.9V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0K	-	XC6221A481NR	LVR-IC	LDO, 4.8V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0K	-	XC6221C251NR	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0K	-	XC6501C45ANR-G	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0L	-	BU4327F	Vdet-IC	2.7V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0L	-	R3133Q10EA	Vdet-IC	1V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0L	-	XC6127N31ANR	Vdet-IC	3.1V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0L	-	XC6221A491NR	LVR-IC	LDO, 4.9V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0L	-	XC6221C261NR	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0L	-	XC6501C461NR-G	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0M	-	BU4328F	Vdet-IC	2.8V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0M	-	R3133Q11EA	Vdet-IC	1.1V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0M	-	XC6127N33ANR	Vdet-IC	3.3V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0M	-	XC6221A501NR	LVR-IC	LDO, 5.0V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0M	-	XC6221C271NR	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0M	-	XC6501C46ANR-G	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0N	-	BU4329F	Vdet-IC	2.9V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0N	-	R3133Q12EA	Vdet-IC	1.2V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0N	-	XC6127N35ANR	Vdet-IC	3.5V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0N	-	XC6221A40BNR	LVR-IC	LDO, 4.05V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0N	-	XC6221C281NR	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0N	-	XC6501C471NR-G	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0P	-	BU4330F	Vdet-IC	3.0V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0P	-	R3133Q13EA	Vdet-IC	1.3V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0P	-	XC6127N37ANR	Vdet-IC	3.7V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0P	-	XC6221A41BNR	LVR-IC	LDO, 4.15V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0P	-	XC6221C291NR	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0P	-	XC6501C47ANR-G	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0Q	-	BU4331F	Vdet-IC	3.1V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0Q	-	R3133Q14EA	Vdet-IC	1.4V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0R	-	BU4332F	Vdet-IC	3.2V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0R	-	R3133Q15EA	Vdet-IC	1.5V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0R	-	XC6127N39ANR	Vdet-IC	3.9V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0R	-	XC6221A42BNR	LVR-IC	LDO, 4.25V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0R	-	XC6221C301NR	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0R	-	XC6501C481NR-G	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0S	-	BU4333F	Vdet-IC	3.3V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0S	-	R3133Q16EA	Vdet-IC	1.6V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0S	-	XC6127N41ANR	Vdet-IC	4.1V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0S	-	XC6221A43BNR	LVR-IC	LDO, 4.35V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0S	-	XC6221C311NR	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0S	-	XC6501C48ANR-G	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0T	-	BU4334F	Vdet-IC	3.4V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0T	-	R3133Q17EA	Vdet-IC	1.7V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0T	-	XC6127N43ANR	Vdet-IC	4.3V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0T	-	XC6221A44BNR	LVR-IC	LDO, 4.45V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0T	-	XC6221C321NR	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0T	-	XC6501C491NR-G	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0U	-	BU4335F	Vdet-IC	3.5V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0U	-	R3133Q18EA	Vdet-IC	1.8V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0U	-	XC6127N45ANR	Vdet-IC	4.5V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0U	-	XC6221A45BNR	LVR-IC	LDO, 4.55V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0U	-	XC6221C331NR	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0U	-	XC6501C49ANR-G	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0V	-	BU4336F	Vdet-IC	3.6V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0V	-	R3133Q19EA	Vdet-IC	1.9V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
0V	-	XC6127N47ANR	Vdet-IC	4.7V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0V	-	XC6221A46BNR	LVR-IC	LDO, 4.65V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0V	-	XC6221C341NR	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0V	-	XC6501C501NR-G	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
0W	-	BU4337F	Vdet-IC	3.7V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0X	-	BU4338F	Vdet-IC	3.8V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0X	-	XC6127N49ANR	Vdet-IC	4.9V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0X	-	XC6221A47BNR	LVR-IC	LDO, 4.75V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0X	-	XC6221C351NR	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0Y	-	BU4339F	Vdet-IC	3.9V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0Y	-	XC6127N51ANR	Vdet-IC	5.1V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0Y	-	XC6221A48BNR	LVR-IC	LDO, 4.85V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0Y	-	XC6221C361NR	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
0Z	-	BU4340F	Vdet-IC	4.0V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
0Z	-	XC6127N53ANR	Vdet-IC	5.3V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
0Z	-	XC6221A49BNR	LVR-IC	LDO, 4.95V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
0Z	-	XC6221C371NR	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
1	gc	ELM7516NCB	Vdet-IC	1.6V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
1	gd	ELM7516CCB	Vdet-IC	1.6V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
10	-	AP8822C-50GI	Vdet-IC	5.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
10	-	AP8822C-50GS	Vdet-IC	5.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
10	-	AP8822C-50PI	Vdet-IC	5.0V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
10	-	AP8822C-50PS	Vdet-IC	5.0V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
10	-	R3111Q101B	Vdet-IC	1V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
10	-	XC6127N55BNR	Vdet-IC	5.5V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
10	-	XC6221C381NR	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
10	-	XC6225A37ANR-G	LVR-IC	LDO, 3.75V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
105	-	LN3526N1012M	Vdet-IC	1.0V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
106	-	LN3526N1042M	Vdet-IC	1.0V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
107	-	LN3526N1052M	Vdet-IC	1.0V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
10W	-	MAZ3100W	Z-diode	Dual, 9.4..10.6V, If=100mA, Zzt=20Ω, 200mW	SOT-143	24ce	-	5b	Pan
11	-	AP8822C-51GI	Vdet-IC	5.1V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
11	-	AP8822C-51GS	Vdet-IC	5.1V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
11	-	AP8822C-51PI	Vdet-IC	5.1V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
11	-	AP8822C-51PS	Vdet-IC	5.1V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
11	-	MRF9511A	Si-npn	UHF, 20V, 100mA, 322mW, B=75..150, 8GHz	SOT-143	24tc	-	5c	Mot
11	-	R3111Q111B	Vdet-IC	1.1V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
11	-	XC6221C391NR	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
11	-	XC6225A382NR-G	LVR-IC	LDO, 3.8V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
115	-	LN3526N1112M	Vdet-IC	1.1V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
116	-	LN3526N1142M	Vdet-IC	1.1V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
117	-	LN3526N1152M	Vdet-IC	1.1V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
12	-	AP8822C-52GI	Vdet-IC	5.2V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
12	-	AP8822C-52GS	Vdet-IC	5.2V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
12	-	AP8822C-52PI	Vdet-IC	5.2V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
12	-	AP8822C-52PS	Vdet-IC	5.2V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
12	-	R3111Q121B	Vdet-IC	1.2V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
12	-	XC6213B122NR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
12	-	XC6221C401NR	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
12	-	XC6225A38ANR-G	LVR-IC	LDO, 3.85V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
125	-	LN3526N1212M	Vdet-IC	1.2V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
126	-	LN3526N1242M	Vdet-IC	1.2V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
127	-	LN3526N1252M	Vdet-IC	1.2V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
13	-	AP8822C-53GI	Vdet-IC	5.3V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
13	-	AP8822C-53GS	Vdet-IC	5.3V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
13	-	AP8822C-53PI	Vdet-IC	5.3V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
13	-	AP8822C-53PS	Vdet-IC	5.3V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
13	-	R3111Q131B	Vdet-IC	1.3V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
13	-	XC6213B132NR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
13	-	XC6221C411NR	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
13	-	XC6225A392NR-G	LVR-IC	LDO, 3.9V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
135	-	LN3526N1312M	Vdet-IC	1.3V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
136	-	LN3526N1342M	Vdet-IC	1.3V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
137	-	LN3526N1352M	Vdet-IC	1.3V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
13R	-	S913TR	MMIC	UHF, 12V, 30mA, 200mW, Idss=50..500µA	SOT-143R	26fm	A3	5c	Vs
14	-	AP8822C-54GI	Vdet-IC	5.4V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
14	-	AP8822C-54GS	Vdet-IC	5.4V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
14	-	AP8822C-54PI	Vdet-IC	5.4V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
14	-	AP8822C-54PS	Vdet-IC	5.4V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
14	-	R3111Q141B	Vdet-IC	1.4V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
14	-	XC6213B142NR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
14	-	XC6221C421NR	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
14	-	XC6225A39ANR-G	LVR-IC	LDO, 3.95V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
145	-	LN3526N1412M	Vdet-IC	1.4V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
146	-	LN3526N1442M	Vdet-IC	1.4V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
147	-	LN3526N1452M	Vdet-IC	1.4V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
15	-	AP8822C-55GI	Vdet-IC	5.5V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
15	-	AP8822C-55GS	Vdet-IC	5.5V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
15	-	AP8822C-55PI	Vdet-IC	5.5V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
15	-	AP8822C-55PS	Vdet-IC	5.5V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
15	-	MRF0211	Si-npn	UHF, 30V, 70mA, 580mW, B=50..300, 5.5GHz	SOT-143	24tc	-	5c	Mot
15	-	R3111Q151B	Vdet-IC	1.5V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
15	-	XC6213B152NR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
15	-	XC6221C431NR	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
15	-	XC6225A402NR-G	LVR-IC	LDO, 4.0V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
155	-	LN3526N1512M	Vdet-IC	1.5V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
156	-	LN3526N1542M	Vdet-IC	1.5V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
157	-	LN3526N1552M	Vdet-IC	1.5V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
16	-	AP8822C-56GI	Vdet-IC	5.6V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
16	-	AP8822C-56GS	Vdet-IC	5.6V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
16	-	AP8822C-56PI	Vdet-IC	5.6V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
16	-	AP8822C-56PS	Vdet-IC	5.6V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
16	-	R3111Q161B	Vdet-IC	1.6V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
16	-	XC6213B162NR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
16	-	XC6221C441NR	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
16	-	XC6225A40ANR-G	LVR-IC	LDO, 4.05V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
165	-	LN3526N1612M	Vdet-IC	1.6V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
166	-	LN3526N1642M	Vdet-IC	1.6V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
167	-	LN3526N1652M	Vdet-IC	1.6V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
17	-	AP8822C-57GI	Vdet-IC	5.7V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
17	-	AP8822C-57GS	Vdet-IC	5.7V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
17	-	AP8822C-57PI	Vdet-IC	5.7V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
17	-	AP8822C-57PS	Vdet-IC	5.7V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
17	-	R3111Q171B	Vdet-IC	1.7V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
17	-	XC6213B172NR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
17	-	XC6217C082NR	LVR-IC	LDO, 0.8V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
17	-	XC6221C451NR	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
175	-	LN3526N1712M	Vdet-IC	1.7V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
176	-	LN3526N1742M	Vdet-IC	1.7V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
177	-	LN3526N1752M	Vdet-IC	1.7V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
17s	-	BAS125-07	Si-diode	Dual, Schottky, 25V, 100mA, Vf<0.9V(35mA), Cd<1.1pF	SOT-143	24ce	-	5h	Inf





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
17s	-	BAS125-07W	Si-diode	Dual, Schottky, 25V, 100mA, Vf<0.9V(35mA), Cd<1.1pF	SOT-343	24ce	-	5h	Inf
18	-	AP8822C-58GI	Vdet-IC	5.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
18	-	AP8822C-58GS	Vdet-IC	5.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
18	-	AP8822C-58PI	Vdet-IC	5.8V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
18	-	AP8822C-58PS	Vdet-IC	5.8V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
18	-	BFP181T	Si-npn	UHF, 20V, 20mA, 175mW, B=50..200, 8GHz	SOT-143	24tc	-	5b	Tfk
18	-	MRF9331	Si-npn	UHF, 15V, 2mA, 50mW, B=30..200, 5GHz	SOT-143	24tc	-	5c	Mot
18	-	MRF9411B	Si-npn	UHF, 20V, 50mA, 250mW, B=100..200, 8GHz	SOT-143	24tc	-	5c	Mot
18	-	R3111Q181B	Vdet-IC	1.8V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
18	-	XC6213B182NR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
18	-	XC6217C092NR	LVR-IC	LDO, 0.9V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
18	-	XC6221C461NR	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
185	-	LN3526N1812M	Vdet-IC	1.8V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
186	-	LN3526N1842M	Vdet-IC	1.8V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
187	-	LN3526N1852M	Vdet-IC	1.8V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
18A	-	AAT60018A-S15	Vdet-IC	1.8V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
18B	-	AAT60018B-S15	Vdet-IC	1.8V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
18C	-	AAT60018C-S15	Vdet-IC	1.8V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
18D	-	AAT60018D-S15	Vdet-IC	1.8V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
18R	-	S918TR	MMIC	UHF, 16V, 30mA, 200mW, Idss=50..500µA	SOT-143R	26fm	A3	5c	Vs
19	-	AP8822C-59GI	Vdet-IC	5.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
19	-	AP8822C-59GS	Vdet-IC	5.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
19	-	AP8822C-59PI	Vdet-IC	5.9V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
19	-	AP8822C-59PS	Vdet-IC	5.9V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
19	-	R3111Q191B	Vdet-IC	1.9V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
19	-	XC6213B192NR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
19	-	XC6217C102NR	LVR-IC	LDO, 1.0V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
19	-	XC6221C471NR	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
193	-	BFP193T	Si-npn	UHF, 20V, 80mA, 580mW, B=50..200, 8GHz	SOT-143	24tc	-	5b	Sil
195	-	LN3526N1912M	Vdet-IC	1.9V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
196	-	LN3526N1942M	Vdet-IC	1.9V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
197	-	LN3526N1952M	Vdet-IC	1.9V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
19A	-	AAT60019A-S15	Vdet-IC	1.9V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
19B	-	AAT60019B-S15	Vdet-IC	1.9V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
19C	-	AAT60019C-S15	Vdet-IC	1.9V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
19D	-	AAT60019D-S15	Vdet-IC	1.9V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
1A	-	BU4341F	Vdet-IC	4.1V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
1A	-	R3132Q20EA	Vdet-IC	2V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1A	-	RQ5RW60BA	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
1A	-	XC6127N15BNR	Vdet-IC	1.5V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1A	-	XC6217C112NR	LVR-IC	LDO, 1.1V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1A	-	XC6221C481NR	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
1B	-	BU4342F	Vdet-IC	4.2V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
1B	-	R3132Q21EA	Vdet-IC	2.1V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1B	-	RQ5RW19BA	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
1B	-	XC6127N17BNR	Vdet-IC	1.7V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1B	-	XC6217C122NR	LVR-IC	LDO, 1.2V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1B	-	XC6221C491NR	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
1C	-	BU4343F	Vdet-IC	4.3V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
1C	-	R3132Q22EA	Vdet-IC	2.2V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1C	-	RQ5RW18BA	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
1C	-	XC6127N19BNR	Vdet-IC	1.9V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1C	-	XC6213B12ANR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
1C	-	XC6217C132NR	LVR-IC	LDO, 1.3V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1C	-	XC6221C501NR	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
1D	-	BU4344F	Vdet-IC	4.4V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
1D	-	R3132Q23EA	Vdet-IC	2.3V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1D	-	RQ5RW17BA	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
1D	-	XC6127N21BNR	Vdet-IC	2.1V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1D	-	XC6213B13ANR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
1D	-	XC6217C142NR	LVR-IC	LDO, 1.4V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1D1	-	S-1312A33-A4T1U3	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1D2	-	S-1312A34-A4T1U3	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1D3	-	S-1312A35-A4T1U3	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DA	-	S-1312A10-A4T1U3	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DB	-	S-1312A11-A4T1U3	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DC	-	S-1312A12-A4T1U3	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DD	-	S-1312A13-A4T1U3	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DE	-	S-1312A14-A4T1U3	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DF	-	S-1312A15-A4T1U3	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1DG	-	S-1312A16-A4T1U3	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DH	-	S-1312A17-A4T1U3	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DJ	-	S-1312A18-A4T1U3	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DK	-	S-1312A1J-A4T1U3	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DL	-	S-1312A19-A4T1U3	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DM	-	S-1312A20-A4T1U3	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DN	-	S-1312A21-A4T1U3	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DO	-	S-1312A22-A4T1U3	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DP	-	S-1312A23-A4T1U3	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DQ	-	S-1312A24-A4T1U3	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DR	-	S-1312A25-A4T1U3	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DS	-	S-1312A26-A4T1U3	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DT	-	S-1312A27-A4T1U3	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DU	-	S-1312A28-A4T1U3	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DV	-	S-1312A2J-A4T1U3	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DW	-	S-1312A29-A4T1U3	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DX	-	S-1312A30-A4T1U3	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DY	-	S-1312A31-A4T1U3	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1DZ	-	S-1312A32-A4T1U3	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1E	-	BU4345F	Vdet-IC	4.5V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
1E	-	R3132Q24EA	Vdet-IC	2.4V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1E	-	RQ5RW16BA	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
1E	-	XC6127N23BNR	Vdet-IC	2.3V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1E	-	XC6213B14ANR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
1E	-	XC6217C152NR	LVR-IC	LDO, 1.5V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1E1	-	S-1312B33-A4T1U3	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1E2	-	S-1312B34-A4T1U3	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1E3	-	S-1312B35-A4T1U3	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EA	-	S-1312B10-A4T1U3	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EB	-	S-1312B11-A4T1U3	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EC	-	S-1312B12-A4T1U3	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1ED	-	S-1312B13-A4T1U3	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EE	-	S-1312B14-A4T1U3	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EF	-	S-1312B15-A4T1U3	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EG	-	S-1312B16-A4T1U3	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EH	-	S-1312B17-A4T1U3	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EJ	-	S-1312B18-A4T1U3	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EK	-	S-1312B1J-A4T1U3	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EL	-	S-1312B19-A4T1U3	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EM	-	S-1312B20-A4T1U3	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EN	-	S-1312B21-A4T1U3	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EO	-	S-1312B22-A4T1U3	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EP	-	S-1312B23-A4T1U3	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EQ	-	S-1312B24-A4T1U3	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1ER	-	S-1312B25-A4T1U3	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1ES	-	S-1312B26-A4T1U3	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1ET	-	S-1312B27-A4T1U3	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EU	-	S-1312B28-A4T1U3	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EV	-	S-1312B2J-A4T1U3	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EW	-	S-1312B29-A4T1U3	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EX	-	S-1312B30-A4T1U3	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EY	-	S-1312B31-A4T1U3	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1EZ	-	S-1312B32-A4T1U3	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1F	-	BU4346F	Vdet-IC	4.6V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
1F	-	R3132Q25EA	Vdet-IC	2.5V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1F	-	RQ5RW15BA	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
1F	-	XC6127N25BNR	Vdet-IC	2.5V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1F	-	XC6213B15ANR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
1F	-	XC6217C162NR	LVR-IC	LDO, 1.6V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1F1	-	S-1312C33-A4T1U3	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1F2	-	S-1312C34-A4T1U3	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1F3	-	S-1312C35-A4T1U3	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FA	-	S-1312C10-A4T1U3	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FB	-	S-1312C11-A4T1U3	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FC	-	S-1312C12-A4T1U3	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FD	-	S-1312C13-A4T1U3	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FE	-	S-1312C14-A4T1U3	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FF	-	S-1312C15-A4T1U3	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FG	-	S-1312C16-A4T1U3	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FH	-	S-1312C17-A4T1U3	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1FJ	-	S-1312C18-A4T1U3	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FK	-	S-1312C1J-A4T1U3	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FL	-	S-1312C19-A4T1U3	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FM	-	S-1312C20-A4T1U3	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FN	-	S-1312C21-A4T1U3	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FO	-	S-1312C22-A4T1U3	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FP	-	S-1312C23-A4T1U3	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FQ	-	S-1312C24-A4T1U3	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FR	-	S-1312C25-A4T1U3	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FS	-	S-1312C26-A4T1U3	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FT	-	S-1312C27-A4T1U3	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FU	-	S-1312C28-A4T1U3	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FV	-	S-1312C2J-A4T1U3	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FW	-	S-1312C29-A4T1U3	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FX	-	S-1312C30-A4T1U3	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FY	-	S-1312C31-A4T1U3	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1FZ	-	S-1312C32-A4T1U3	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1G	-	BU4347F	Vdet-IC	4.7V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
1G	-	R3132Q26EA	Vdet-IC	2.6V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1G1	-	S-1312D33-A4T1U3	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1G2	-	S-1312D34-A4T1U3	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1G3	-	S-1312D35-A4T1U3	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GA	-	S-1312D10-A4T1U3	LVR-IC	LDO, 1.0V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GB	-	S-1312D11-A4T1U3	LVR-IC	LDO, 1.1V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GC	-	S-1312D12-A4T1U3	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GD	-	S-1312D13-A4T1U3	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GE	-	S-1312D14-A4T1U3	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GF	-	S-1312D15-A4T1U3	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GG	-	S-1312D16-A4T1U3	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GH	-	S-1312D17-A4T1U3	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GJ	-	S-1312D18-A4T1U3	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GK	-	S-1312D1J-A4T1U3	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GL	-	S-1312D19-A4T1U3	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GM	-	S-1312D20-A4T1U3	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GN	-	S-1312D21-A4T1U3	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GO	-	S-1312D22-A4T1U3	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GP	-	S-1312D23-A4T1U3	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GQ	-	S-1312D24-A4T1U3	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GR	-	S-1312D25-A4T1U3	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GS	-	S-1312D26-A4T1U3	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GT	-	S-1312D27-A4T1U3	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GU	-	S-1312D28-A4T1U3	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GV	-	S-1312D2J-A4T1U3	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GW	-	S-1312D29-A4T1U3	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GX	-	S-1312D30-A4T1U3	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GY	-	S-1312D31-A4T1U3	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1GZ	-	S-1312D32-A4T1U3	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1H	-	BU4348F	Vdet-IC	4.8V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
1H	-	R3132Q27EA	Vdet-IC	2.7V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1H	-	XC6127N27BNR	Vdet-IC	2.7V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1H	-	XC6213B16ANR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
1H	-	XC6217C172NR	LVR-IC	LDO, 1.7V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1J	-	BCV61A	Si-npn	Dual, 30V, 100mA, 300mW, B=110..220, =250MHz	SOT-143	24t5	-	5h	Inf
1J	-	IMP161JCUS	Vdet-IC	4.0V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
1J	-	R3132Q28EA	Vdet-IC	2.8V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1Jp	-	BCV61A	Si-npn	Dual, 30V, 100mA, 250mW, B=110..220, >100MHz	SOT-143	24t5	-	5c	Phi
1Js	-	BCV61A	Si-npn	Dual, 30V, 100mA, 300mW, B=110..220, =250MHz	SOT-143	24t5	-	5b	Sie
1K	-	R3132Q29EA	Vdet-IC	2.9V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1K	-	XC6127N29BNR	Vdet-IC	2.9V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1K	-	XC6213B17ANR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
1K	-	XC6217C182NR	LVR-IC	LDO, 1.8V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1Kp	-	BCV61B	Si-npn	Dual, 30V, 100mA, 250mW, B=200..450, >100MHz	SOT-143	24t5	-	5c	Phi
1Ks	-	BCV61B	Si-npn	Dual, 30V, 100mA, 300mW, B=200..450, =250MHz	SOT-143	24t5	-	5b	Sie
1L	-	BCV61C	Si-npn	Dual, 30V, 100mA, 250mW, B=420..800, 100MHz	SOT-143	24t5	-	5h	Inf
1L	-	IMP161LCUS	Vdet-IC	4.63V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
1L	-	R3133Q20EA	Vdet-IC	2V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1L	-	XC6127N31BNR	Vdet-IC	3.1V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1L	-	XC6213B18ANR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
1L	-	XC6217C192NR	LVR-IC	LDO, 1.9V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1L1	-	S-1313A31-A4T1U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1L1	-	S-1313A31-N4T1U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1L2	-	S-1313A32-A4T1U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1L2	-	S-1313A32-N4T1U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1L3	-	S-1313A33-A4T1U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1L3	-	S-1313A33-N4T1U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1L4	-	S-1313A34-A4T1U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1L4	-	S-1313A34-N4T1U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1L5	-	S-1313A35-A4T1U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1L5	-	S-1313A35-N4T1U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LA	-	S-1313A10-A4T1U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LA	-	S-1313A10-N4T1U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LB	-	S-1313A11-A4T1U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LB	-	S-1313A11-N4T1U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LC	-	S-1313A12-A4T1U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LC	-	S-1313A12-N4T1U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LD	-	S-1313A13-A4T1U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LD	-	S-1313A13-N4T1U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LE	-	S-1313A14-A4T1U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LE	-	S-1313A14-N4T1U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LF	-	S-1313A15-A4T1U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LF	-	S-1313A15-N4T1U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LG	-	S-1313A16-A4T1U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LG	-	S-1313A16-N4T1U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LH	-	S-1313A17-A4T1U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LH	-	S-1313A17-N4T1U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LJ	-	S-1313A18-A4T1U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LJ	-	S-1313A18-N4T1U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LK	-	S-1313A1J-A4T1U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LK	-	S-1313A1J-N4T1U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LL	-	S-1313A19-A4T1U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LL	-	S-1313A19-N4T1U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LN	-	S-1313A20-A4T1U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LN	-	S-1313A20-N4T1U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LO	-	S-1313A21-A4T1U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LO	-	S-1313A21-N4T1U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1Lp	-	BCV61C	Si-npn	Dual, 30V, 100mA, 250mW, B=420..800, 100MHz	SOT-143	24t5	-	5c	Phi
1LP	-	S-1313A22-A4T1U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LP	-	S-1313A22-N4T1U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LQ	-	S-1313A23-A4T1U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LQ	-	S-1313A23-N4T1U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LR	-	S-1313A24-A4T1U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LR	-	S-1313A24-N4T1U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1Ls	-	BCV61C	Si-npn	Dual, 30V, 100mA, 300mW, B=420..800, =250MHz	SOT-143	24t5	-	5b	Sie
1LS	-	S-1313A25-A4T1U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LS	-	S-1313A25-N4T1U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LT	-	S-1313A26-A4T1U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LT	-	S-1313A26-N4T1U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LU	-	S-1313A28-A4T1U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LU	-	S-1313A28-N4T1U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LV	-	S-1313A27-A4T1U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LV	-	S-1313A27-N4T1U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LX	-	S-1313A2J-A4T1U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LX	-	S-1313A2J-N4T1U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LY	-	S-1313A29-A4T1U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LY	-	S-1313A29-N4T1U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1LZ	-	S-1313A30-A4T1U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1LZ	-	S-1313A30-N4T1U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL, PDR	SC-82AB	26vn	VR4	5b	Sii
1M	-	IMP161MCUS	Vdet-IC	4.38V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
1M	-	R3133Q21EA	Vdet-IC	2.1V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1M	-	XC6127N33BNR	Vdet-IC	3.3V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1M	-	XC6213B19ANR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
1M	-	XC6217C202NR	LVR-IC	LDO, 2.0V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1Mp	-	BCV61	Si-npn	Dual, 30V, 100mA, 250mW, B=110..800, >100MHz	SOT-143	24t5	-	5c	Phi
1N	-	R3133Q22EA	Vdet-IC	2.2V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1N	-	XC6127N35BNR	Vdet-IC	3.5V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1N	-	XC6217C212NR	LVR-IC	LDO, 2.1V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1N1	-	S-1313B31-A4T1U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1N1	-	S-1313B31-N4T1U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1N2	-	S-1313B32-A4T1U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1N2	-	S-1313B32-N4T1U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1N3	-	S-1313B33-A4T1U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1N3	-	S-1313B33-N4T1U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1N4	-	S-1313B34-A4T1U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1N4	-	S-1313B34-N4T1U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1N5	-	S-1313B35-A4T1U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1N5	-	S-1313B35-N4T1U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NA	-	S-1313B10-A4T1U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NA	-	S-1313B10-N4T1U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NB	-	S-1313B11-A4T1U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NB	-	S-1313B11-N4T1U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NC	-	S-1313B12-A4T1U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NC	-	S-1313B12-N4T1U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1ND	-	S-1313B13-A4T1U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1ND	-	S-1313B13-N4T1U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NE	-	S-1313B14-A4T1U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NE	-	S-1313B14-N4T1U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NF	-	S-1313B15-A4T1U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NF	-	S-1313B15-N4T1U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NG	-	S-1313B16-A4T1U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NG	-	S-1313B16-N4T1U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NH	-	S-1313B17-A4T1U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NH	-	S-1313B17-N4T1U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NJ	-	S-1313B18-A4T1U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NJ	-	S-1313B18-N4T1U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NK	-	S-1313B1J-A4T1U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NK	-	S-1313B1J-N4T1U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NL	-	S-1313B19-A4T1U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NL	-	S-1313B19-N4T1U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NN	-	S-1313B20-A4T1U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NN	-	S-1313B20-N4T1U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NO	-	S-1313B21-A4T1U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NO	-	S-1313B21-N4T1U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NP	-	S-1313B22-A4T1U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NP	-	S-1313B22-N4T1U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NQ	-	S-1313B23-A4T1U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NQ	-	S-1313B23-N4T1U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NR	-	S-1313B24-A4T1U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NR	-	S-1313B24-N4T1U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NS	-	S-1313B25-A4T1U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NS	-	S-1313B25-N4T1U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NT	-	S-1313B26-A4T1U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NT	-	S-1313B26-N4T1U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NU	-	S-1313B27-A4T1U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NU	-	S-1313B27-N4T1U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NV	-	S-1313B28-A4T1U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NV	-	S-1313B28-N4T1U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NX	-	S-1313B2J-A4T1U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NX	-	S-1313B2J-N4T1U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NY	-	S-1313B29-A4T1U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NY	-	S-1313B29-N4T1U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1NZ	-	S-1313B30-A4T1U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1NZ	-	S-1313B30-N4T1U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	SC-82AB	26vn	VR4	5b	Sii
1O1	-	S-1313C31-A4T1U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1O1	-	S-1313C31-N4T1U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1O2	-	S-1313C32-A4T1U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1O2	-	S-1313C32-N4T1U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1O3	-	S-1313C33-A4T1U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1O3	-	S-1313C33-N4T1U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1O4	-	S-1313C34-A4T1U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1O4	-	S-1313C34-N4T1U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1O5	-	S-1313C35-A4T1U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1O5	-	S-1313C35-N4T1U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OA	-	S-1313C10-A4T1U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OA	-	S-1313C10-N4T1U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OB	-	S-1313C11-A4T1U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OB	-	S-1313C11-N4T1U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OC	-	S-1313C12-A4T1U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OC	-	S-1313C12-N4T1U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OD	-	S-1313C13-A4T1U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OD	-	S-1313C13-N4T1U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1OE	-	S-1313C14-A4T1U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OE	-	S-1313C14-N4T1U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OF	-	S-1313C15-A4T1U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OF	-	S-1313C15-N4T1U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OG	-	S-1313C16-A4T1U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OG	-	S-1313C16-N4T1U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OH	-	S-1313C17-A4T1U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OH	-	S-1313C17-N4T1U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OJ	-	S-1313C18-A4T1U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OJ	-	S-1313C18-N4T1U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OK	-	S-1313C1J-A4T1U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OK	-	S-1313C1J-N4T1U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OL	-	S-1313C19-A4T1U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OL	-	S-1313C19-N4T1U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1ON	-	S-1313C20-A4T1U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1ON	-	S-1313C20-N4T1U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OO	-	S-1313C21-A4T1U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OO	-	S-1313C21-N4T1U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OP	-	S-1313C22-A4T1U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OP	-	S-1313C22-N4T1U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OQ	-	S-1313C23-A4T1U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OQ	-	S-1313C23-N4T1U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OR	-	S-1313C24-A4T1U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OR	-	S-1313C24-N4T1U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OS	-	S-1313C25-A4T1U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OS	-	S-1313C25-N4T1U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OT	-	S-1313C26-A4T1U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OT	-	S-1313C26-N4T1U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OU	-	S-1313C27-A4T1U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OU	-	S-1313C27-N4T1U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OV	-	S-1313C28-A4T1U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OV	-	S-1313C28-N4T1U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OX	-	S-1313C2J-A4T1U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OX	-	S-1313C2J-N4T1U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OY	-	S-1313C29-A4T1U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OY	-	S-1313C29-N4T1U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1OZ	-	S-1313C30-A4T1U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1OZ	-	S-1313C30-N4T1U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, PDR	SC-82AB	26vn	VR4	5b	Sii
1P	-	R3133Q23EA	Vdet-IC	2.3V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1P	-	XC6127N37BNR	Vdet-IC	3.7V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1P	-	XC6217C222NR	LVR-IC	LDO, 2.2V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1P1	-	S-1313D31-A4T1U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1P1	-	S-1313D31-N4T1U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1P2	-	S-1313D32-A4T1U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1P2	-	S-1313D32-N4T1U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1P3	-	S-1313D33-A4T1U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1P3	-	S-1313D33-N4T1U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1P4	-	S-1313D34-A4T1U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1P4	-	S-1313D34-N4T1U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1P5	-	S-1313D35-A4T1U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1P5	-	S-1313D35-N4T1U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PA	-	S-1313D10-A4T1U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PA	-	S-1313D10-N4T1U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PB	-	S-1313D11-A4T1U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PB	-	S-1313D11-N4T1U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PC	-	S-1313D12-A4T1U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PC	-	S-1313D12-N4T1U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PD	-	S-1313D13-A4T1U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PD	-	S-1313D13-N4T1U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PE	-	S-1313D14-A4T1U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PE	-	S-1313D14-N4T1U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PF	-	S-1313D15-A4T1U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PF	-	S-1313D15-N4T1U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PG	-	S-1313D16-A4T1U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PG	-	S-1313D16-N4T1U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PH	-	S-1313D17-A4T1U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PH	-	S-1313D17-N4T1U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PJ	-	S-1313D18-A4T1U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PJ	-	S-1313D18-N4T1U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PK	-	S-1313D1J-A4T1U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1PK	-	S-1313D1J-N4T1U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PL	-	S-1313D19-A4T1U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PL	-	S-1313D19-N4T1U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PN	-	S-1313D20-A4T1U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PN	-	S-1313D20-N4T1U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PO	-	S-1313D21-A4T1U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PO	-	S-1313D21-N4T1U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PP	-	S-1313D22-A4T1U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PP	-	S-1313D22-N4T1U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PQ	-	S-1313D23-A4T1U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PQ	-	S-1313D23-N4T1U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PR	-	S-1313D24-A4T1U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PR	-	S-1313D24-N4T1U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PS	-	S-1313D25-A4T1U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PS	-	S-1313D25-N4T1U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PT	-	S-1313D26-A4T1U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PT	-	S-1313D26-N4T1U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PU	-	S-1313D27-A4T1U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PU	-	S-1313D27-N4T1U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PV	-	S-1313D28-A4T1U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PV	-	S-1313D28-N4T1U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PX	-	S-1313D2J-A4T1U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PX	-	S-1313D2J-N4T1U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PY	-	S-1313D29-A4T1U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PY	-	S-1313D29-N4T1U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1PZ	-	S-1313D30-A4T1U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1PZ	-	S-1313D30-N4T1U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SC-82AB	26vn	VR4	5b	Sii
1Q	-	R3133Q24EA	Vdet-IC	2.4V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1R	-	IMP161RCUS	Vdet-IC	2.63V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
1R	-	R3133Q25EA	Vdet-IC	2.5V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1R	-	XC6127N39BNR	Vdet-IC	3.9V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1R	-	XC6217C232NR	LVR-IC	LDO, 2.3V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1S	-	IMP161SCUS	Vdet-IC	2.93V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
1S	-	R3133Q26EA	Vdet-IC	2.6V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1S	-	XC6127N41BNR	Vdet-IC	4.1V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1S	-	XC6217C242NR	LVR-IC	LDO, 2.4V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1T	-	IMP161TCUS	Vdet-IC	3.08V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
1T	-	R3133Q27EA	Vdet-IC	2.7V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1T	-	XC6127N43BNR	Vdet-IC	4.3V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1T	-	XC6217C252NR	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1T1	-	S-1333A31-A4T1U3	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1T2	-	S-1333A32-A4T1U3	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1T3	-	S-1333A33-A4T1U3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1T4	-	S-1333A34-A4T1U3	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1T5	-	S-1333A35-A4T1U3	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TA	-	S-1333A10-A4T1U3	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TB	-	S-1333A11-A4T1U3	LVR-IC	LDO, 1.1V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TC	-	S-1333A12-A4T1U3	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TD	-	S-1333A13-A4T1U3	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TE	-	S-1333A14-A4T1U3	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TF	-	S-1333A15-A4T1U3	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TG	-	S-1333A16-A4T1U3	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TH	-	S-1333A17-A4T1U3	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TJ	-	S-1333A18-A4T1U3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TK	-	S-1333A1J-A4T1U3	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TL	-	S-1333A19-A4T1U3	LVR-IC	LDO, 1.9V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TN	-	S-1333A20-A4T1U3	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TO	-	S-1333A21-A4T1U3	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TP	-	S-1333A22-A4T1U3	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TQ	-	S-1333A23-A4T1U3	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TR	-	S-1333A24-A4T1U3	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TS	-	S-1333A25-A4T1U3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TT	-	S-1333A26-A4T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TU	-	S-1333A28-A4T1U3	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TV	-	S-1333A27-A4T1U3	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TX	-	S-1333A2J-A4T1U3	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TY	-	S-1333A29-A4T1U3	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1TZ	-	S-1333A30-A4T1U3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, PDR	HSNT-4	78vm	VR4	5b	Sii
1U	-	R3133Q28EA	Vdet-IC	2.8V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1U	-	XC6127N45BNR	Vdet-IC	4.5V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1U	-	XC6217C262NR	LVR-IC	LDO, 2.6V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1U1	-	S-1333B31-A4T1U3	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1U2	-	S-1333B32-A4T1U3	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1U3	-	S-1333B33-A4T1U3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1U4	-	S-1333B34-A4T1U3	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1U5	-	S-1333B35-A4T1U3	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UA	-	S-1333B10-A4T1U3	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UB	-	S-1333B11-A4T1U3	LVR-IC	LDO, 1.1V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UC	-	S-1333B12-A4T1U3	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UD	-	S-1333B13-A4T1U3	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UE	-	S-1333B14-A4T1U3	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UF	-	S-1333B15-A4T1U3	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UG	-	S-1333B16-A4T1U3	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UH	-	S-1333B17-A4T1U3	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UJ	-	S-1333B18-A4T1U3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UK	-	S-1333B1J-A4T1U3	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UL	-	S-1333B19-A4T1U3	LVR-IC	LDO, 1.9V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UN	-	S-1333B20-A4T1U3	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UO	-	S-1333B21-A4T1U3	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UP	-	S-1333B22-A4T1U3	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UQ	-	S-1333B23-A4T1U3	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UR	-	S-1333B24-A4T1U3	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1US	-	S-1333B25-A4T1U3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UT	-	S-1333B26-A4T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UU	-	S-1333B27-A4T1U3	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UV	-	S-1333B28-A4T1U3	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UX	-	S-1333B2J-A4T1U3	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UY	-	S-1333B29-A4T1U3	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1UZ	-	S-1333B30-A4T1U3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL	HSNT-4	78vm	VR4	5b	Sii
1V	-	R3133Q29EA	Vdet-IC	2.9V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
1V	-	XC6127N47BNR	Vdet-IC	4.7V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1V	-	XC6217C272NR	LVR-IC	LDO, 2.7V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1V1	-	S-1333C31-A4T1U3	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1V2	-	S-1333C32-A4T1U3	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1V3	-	S-1333C33-A4T1U3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1V4	-	S-1333C34-A4T1U3	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1V5	-	S-1333C35-A4T1U3	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VA	-	S-1333C10-A4T1U3	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VB	-	S-1333C11-A4T1U3	LVR-IC	LDO, 1.1V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VC	-	S-1333C12-A4T1U3	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VD	-	S-1333C13-A4T1U3	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VE	-	S-1333C14-A4T1U3	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VF	-	S-1333C15-A4T1U3	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VG	-	S-1333C16-A4T1U3	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VH	-	S-1333C17-A4T1U3	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VJ	-	S-1333C18-A4T1U3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VK	-	S-1333C1J-A4T1U3	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VL	-	S-1333C19-A4T1U3	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VN	-	S-1333C20-A4T1U3	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VO	-	S-1333C21-A4T1U3	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VP	-	S-1333C22-A4T1U3	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VQ	-	S-1333C23-A4T1U3	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VR	-	S-1333C24-A4T1U3	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VS	-	S-1333C25-A4T1U3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VT	-	S-1333C26-A4T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VU	-	S-1333C27-A4T1U3	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VV	-	S-1333C28-A4T1U3	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VX	-	S-1333C2J-A4T1U3	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VY	-	S-1333C29-A4T1U3	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1VZ	-	S-1333C30-A4T1U3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR	HSNT-4	78vm	VR4	5b	Sii
1X	-	XC6127N49BNR	Vdet-IC	4.9V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1X	-	XC6217C282NR	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1X1	-	S-1333D31-A4T1U3	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1X2	-	S-1333D32-A4T1U3	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1X3	-	S-1333D33-A4T1U3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1X4	-	S-1333D34-A4T1U3	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1X4	-	S-1333D34-M5T1U3	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1X5	-	S-1333D35-A4T1U3	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1X5	-	S-1333D35-M5T1U3	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XA	-	S-1333D10-A4T1U3	LVR-IC	LDO, 1.0V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1XB	-	S-1333D11-A4T1U3	LVR-IC	LDO, 1.1V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XC	-	S-1333D12-A4T1U3	LVR-IC	LDO, 1.2V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XD	-	S-1333D13-A4T1U3	LVR-IC	LDO, 1.3V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XE	-	S-1333D14-A4T1U3	LVR-IC	LDO, 1.4V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XF	-	S-1333D15-A4T1U3	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XG	-	S-1333D16-A4T1U3	LVR-IC	LDO, 1.6V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XH	-	S-1333D17-A4T1U3	LVR-IC	LDO, 1.7V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XJ	-	S-1333D18-A4T1U3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XK	-	S-1333D1J-A4T1U3	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XL	-	S-1333D19-A4T1U3	LVR-IC	LDO, 1.9V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XN	-	S-1333D20-A4T1U3	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XO	-	S-1333D21-A4T1U3	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XP	-	S-1333D22-A4T1U3	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XQ	-	S-1333D23-A4T1U3	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XR	-	S-1333D24-A4T1U3	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XS	-	S-1333D25-A4T1U3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XT	-	S-1333D26-A4T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XU	-	S-1333D27-A4T1U3	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XV	-	S-1333D28-A4T1U3	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XX	-	S-1333D2J-A4T1U3	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XY	-	S-1333D29-A4T1U3	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1XZ	-	S-1333D30-A4T1U3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	HSNT-4	78vm	VR4	5b	Sii
1Y	-	XC6127N51BNR	Vdet-IC	5.1V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1Y	-	XC6217C292NR	LVR-IC	LDO, 2.9V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
1Z	-	XC6127N53BNR	Vdet-IC	5.3V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
1Z	-	XC6217C302NR	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
2	gc	ELM7517NCB	Vdet-IC	1.7V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
2	gd	ELM7517CCB	Vdet-IC	1.7V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
20	-	AP8822C-60GI	Vdet-IC	6.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
20	-	AP8822C-60GS	Vdet-IC	6.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
20	-	AP8822C-60PI	Vdet-IC	6.0V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
20	-	AP8822C-60PS	Vdet-IC	6.0V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
20	-	R3111Q201B	Vdet-IC	2V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
20	-	XC6127N55CNR	Vdet-IC	5.5V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
20	-	XC6213B202NR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
20	-	XC6217C312NR	LVR-IC	LDO, 3.1V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
20	-	XC6221C08BNR	LVR-IC	LDO, 0.85V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
20	-	XC6225B37ANR-G	LVR-IC	LDO, 3.75V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
201	-	SSTSD201	n-MOSFET	VHF/UHF-Amp/Mix/Osc, 25V, 50mA, 360mW, Rds=40Ω, 1pf	SOT-143	24fx	-	5c	Cal
203	-	SSTSD203	n-MOSFET	VHF/UHF-Amp/Mix/Osc, 20V, 50mA, 360mW, Rds=35Ω, 1pf	SOT-143	24fx	-	5c	Cal
205	-	LN3526N2012M	Vdet-IC	2.0V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
206	-	LN3526N2042M	Vdet-IC	2.0V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
207	-	LN3526N2052M	Vdet-IC	2.0V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
20A	-	AAT60020A-S15	Vdet-IC	2.0V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
20B	-	AAT60020B-S15	Vdet-IC	2.0V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
20C	-	AAT60020C-S15	Vdet-IC	2.0V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
20D	-	AAT60020D-S15	Vdet-IC	2.0V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
20F	-	TSDF1220R	Si-npn	UHF-VHF, LN, 9V, 40mA, 200mW, B=50..150, 12GHz	SOT-143R	26tu	-	5b	Vs
20W	-	MA3200W	Z-diode	Dual, 17..22V, If=150mA, Zzt= 15Ω, 150mW	SOT-143R	26ce	-	5b	Pan
20W	-	MAZ3200W	Z-diode	Dual, 18.8..21.2V, If=100mA, Zzt=55Ω, 200mW	SOT-143	24ce	-	5b	Pan
21	-	R3111Q211B	Vdet-IC	2.1V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
21	-	XC6213B212NR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
21	-	XC6217C322NR	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
21	-	XC6221C09BNR	LVR-IC	LDO, 0.95V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
21	-	XC6225B382NR-G	LVR-IC	LDO, 3.8V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
211	-	SST211	n-MOSFET	Sw, 30V, 50mA, 360mW, Rds=7Ω, 0.7/10ns	SOT-143	24fx	-	5b	Cal
213	-	SST213	n-MOSFET	Sw, 10V, 50mA, 360mW, Rds=7Ω, 0.7/10ns	SOT-143	24fx	-	5b	Cal
215	-	LN3526N2112M	Vdet-IC	2.1V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
215	-	SST215	n-MOSFET	Sw, 20V, 50mA, 360mW, Rds=7Ω, 0.7/10ns	SOT-143	24fx	-	5b	Cal
216	-	LN3526N2142M	Vdet-IC	2.1V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
217	-	LN3526N2152M	Vdet-IC	2.1V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
21A	-	AAT60021A-S15	Vdet-IC	2.1V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
21A	-	AP6213A-4HNHFGS	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21A	-	AP6213A-4HNHFGW	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21A	-	AP6213A-4HNHFPS	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21A	-	AP6213A-4HNHFPW	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
21A	gf	AP6213A-09NHFGS	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21A	gf	AP6213A-09NHFGW	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21A	gf	AP6213A-09NHFPS	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21A	gf	AP6213A-09NHFPW	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
21A	gg	AP6213A-4HNHFGS1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21A	gg	AP6213A-4HNHFGW1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21A	gg	AP6213A-4HNHFPS1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21A	gg	AP6213A-4HNHFPW1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
21A	gj	AP6213A-09NHFGS1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21A	gj	AP6213A-09NHFGW1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21A	gj	AP6213A-09NHFPS1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21A	gj	AP6213A-09NHFPW1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
21B	-	AAT60021B-S15	Vdet-IC	2.1V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
21B	-	AP6213A-4HNLFGS	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21B	-	AP6213A-4HNLFGW	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21B	-	AP6213A-4HNLFPS	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21B	-	AP6213A-4HNLFPW	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
21B	gf	AP6213A-09NLFGS	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21B	gf	AP6213A-09NLFGW	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21B	gf	AP6213A-09NLFPS	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21B	gf	AP6213A-09NLFPW	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
21B	gg	AP6213A-4HNLFGS1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21B	gg	AP6213A-4HNLFGW1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21B	gg	AP6213A-4HNLFPS1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21B	gg	AP6213A-4HNLFPW1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
21B	gj	AP6213A-09NLFGS1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21B	gj	AP6213A-09NLFGW1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21B	gj	AP6213A-09NLFPS1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21B	gj	AP6213A-09NLFPW1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
21C	-	AAT60021C-S15	Vdet-IC	2.1V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
21C	-	AP6213A-4HNHNGS	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21C	-	AP6213A-4HNHNGW	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21C	-	AP6213A-4HNHNPS	LVR-IC	LDO, 4.75V±2%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
21C	-	AP6213A-4HNHNPW	LVR-IC	LDO, 4.75V±2%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
21C	gf	AP6213A-09NHNGS	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21C	gf	AP6213A-09NHNGW	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21C	gf	AP6213A-09NHNPS	LVR-IC	LDO, 0.9V±2%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
21C	gf	AP6213A-09NHNPW	LVR-IC	LDO, 0.9V±2%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
21C	gg	AP6213A-4HNHNGS1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21C	gg	AP6213A-4HNHNGW1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21C	gg	AP6213A-4HNHNPS1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
21C	gg	AP6213A-4HNHNPW1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
21C	gj	AP6213A-09NHNGS1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21C	gj	AP6213A-09NHNGW1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21C	gj	AP6213A-09NHNPS1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
21C	gj	AP6213A-09NHNPW1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
21D	-	AAT60021D-S15	Vdet-IC	2.1V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
21D	-	AP6213A-4HNLNGS	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21D	-	AP6213A-4HNLNGW	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21D	-	AP6213A-4HNLNPS	LVR-IC	LDO, 4.75V±2%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
21D	-	AP6213A-4HNLNPW	LVR-IC	LDO, 4.75V±2%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
21D	gf	AP6213A-09NLNGS	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21D	gf	AP6213A-09NLNGW	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21D	gf	AP6213A-09NLNPS	LVR-IC	LDO, 0.9V±2%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
21D	gf	AP6213A-09NLNPW	LVR-IC	LDO, 0.9V±2%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
21D	gg	AP6213A-4HNLNGS1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21D	gg	AP6213A-4HNLNGW1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21D	gg	AP6213A-4HNLNPS1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
21D	gg	AP6213A-4HNLNPW1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
21D	gj	AP6213A-09NLNGS1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21D	gj	AP6213A-09NLNGW1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21D	gj	AP6213A-09NLNPS1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
21D	gj	AP6213A-09NLNPW1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
21E	-	AP6213A-4HUHFGS	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21E	-	AP6213A-4HUHFGW	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21E	-	AP6213A-4HUHFPS	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21E	-	AP6213A-4HUHFPW	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
21E	gf	AP6213A-09UHFGS	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21E	gf	AP6213A-09UHFGW	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21E	gf	AP6213A-09UHFPS	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21E	gf	AP6213A-09UHFPW	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
21E	gg	AP6213A-4HUHFGS1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21E	gg	AP6213A-4HUHFGW1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21E	gg	AP6213A-4HUHFPS1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
21E	gg	AP6213A-4HUHFPW1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
21E	gj	AP6213A-09UHFGS1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21E	gj	AP6213A-09UHFGW1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21E	gj	AP6213A-09UHFPS1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21E	gj	AP6213A-09UHFPW1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
21F	-	AP6213A-4HULFGS	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21F	-	AP6213A-4HULFGW	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21F	-	AP6213A-4HULFPS	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21F	-	AP6213A-4HULFPW	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
21F	gf	AP6213A-09ULFGS	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21F	gf	AP6213A-09ULFGW	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21F	gf	AP6213A-09ULFPS	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21F	gf	AP6213A-09ULFPW	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
21F	gg	AP6213A-4HULFGS1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21F	gg	AP6213A-4HULFGW1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21F	gg	AP6213A-4HULFPS1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21F	gg	AP6213A-4HULFPW1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
21F	gj	AP6213A-09ULFGS1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21F	gj	AP6213A-09ULFGW1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21F	gj	AP6213A-09ULFPS1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21F	gj	AP6213A-09ULFPW1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
21G	-	AP6213A-4HUHNGS	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21G	-	AP6213A-4HUHNGW	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21G	-	AP6213A-4HUHNPS	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
21G	-	AP6213A-4HUHNPW	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
21G	gf	AP6213A-09UHNGS	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21G	gf	AP6213A-09UHNGW	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21G	gf	AP6213A-09UHNPS	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
21G	gf	AP6213A-09UHNPW	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
21G	gg	AP6213A-4HUHNGS1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21G	gg	AP6213A-4HUHNGW1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21G	gg	AP6213A-4HUHNPS1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
21G	gg	AP6213A-4HUHNPW1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
21G	gj	AP6213A-09UHNGS1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21G	gj	AP6213A-09UHNGW1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21G	gj	AP6213A-09UHNPS1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
21G	gj	AP6213A-09UHNPW1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
21H	-	AP6213A-4HULNGS	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21H	-	AP6213A-4HULNGW	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21H	-	AP6213A-4HULNPS	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
21H	-	AP6213A-4HULNPW	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
21H	gf	AP6213A-09ULNGS	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21H	gf	AP6213A-09ULNGW	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21H	gf	AP6213A-09ULNPS	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
21H	gf	AP6213A-09ULNPW	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
21H	gg	AP6213A-4HULNGS1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21H	gg	AP6213A-4HULNGW1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21H	gg	AP6213A-4HULNPS1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
21H	gg	AP6213A-4HULNPW1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
21H	gj	AP6213A-09ULNGS1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21H	gj	AP6213A-09ULNGW1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21H	gj	AP6213A-09ULNPS1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
21H	gj	AP6213A-09ULNPW1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
21J	-	AP6213A-4HDHFGS	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21J	-	AP6213A-4HDHFGW	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21J	-	AP6213A-4HDHFPS	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21J	-	AP6213A-4HDHFPW	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
21J	gf	AP6213A-09DHFGS	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21J	gf	AP6213A-09DHFGW	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21J	gf	AP6213A-09DHFPS	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21J	gf	AP6213A-09DHFPW	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
21J	gg	AP6213A-4HDHFGS1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21J	gg	AP6213A-4HDHFGW1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21J	gg	AP6213A-4HDHFPS1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21J	gg	AP6213A-4HDHFPW1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
21J	gj	AP6213A-09DHFGS1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21J	gj	AP6213A-09DHFGW1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21J	gj	AP6213A-09DHFPS1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21J	gj	AP6213A-09DHFPW1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
21K	-	AP6213A-4HDLFGS	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
21K	-	AP6213A-4HDLFGW	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21K	-	AP6213A-4HDLFPS	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21K	-	AP6213A-4HDLFPW	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
21K	gf	AP6213A-09DLFGS	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21K	gf	AP6213A-09DLFGW	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21K	gf	AP6213A-09DLFPS	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21K	gf	AP6213A-09DLFPW	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
21K	gg	AP6213A-4HDLFGS1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21K	gg	AP6213A-4HDLFGW1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21K	gg	AP6213A-4HDLFPS1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21K	gg	AP6213A-4HDLFPW1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
21K	gj	AP6213A-09DLFGS1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21K	gj	AP6213A-09DLFGW1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21K	gj	AP6213A-09DLFPS1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
21K	gj	AP6213A-09DLFPW1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
21L	-	AP6213A-4HDHNGS	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21L	-	AP6213A-4HDHNGW	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21L	-	AP6213A-4HDHNPS	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
21L	-	AP6213A-4HDHNPW	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
21L	gf	AP6213A-09DHNGS	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21L	gf	AP6213A-09DHNGW	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21L	gf	AP6213A-09DHNPS	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
21L	gf	AP6213A-09DHNPW	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
21L	gg	AP6213A-4HDHNGS1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21L	gg	AP6213A-4HDHNGW1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21L	gg	AP6213A-4HDHNPS1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
21L	gg	AP6213A-4HDHNPW1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
21L	gj	AP6213A-09DHNGS1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21L	gj	AP6213A-09DHNGW1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21L	gj	AP6213A-09DHNPS1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
21L	gj	AP6213A-09DHNPW1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
21M	-	AP6213A-4HDLNGS	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21M	-	AP6213A-4HDLNGW	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21M	-	AP6213A-4HDLNPS	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
21M	-	AP6213A-4HDLNPW	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
21M	gf	AP6213A-09DLNGS	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21M	gf	AP6213A-09DLNGW	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21M	gf	AP6213A-09DLNPS	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
21M	gf	AP6213A-09DLNPW	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
21M	gg	AP6213A-4HDLNGS1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21M	gg	AP6213A-4HDLNGW1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21M	gg	AP6213A-4HDLNPS1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
21M	gg	AP6213A-4HDLNPW1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
21M	gj	AP6213A-09DLNGS1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
21M	gj	AP6213A-09DLNGW1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
21M	gj	AP6213A-09DLNPS1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
21M	gj	AP6213A-09DLNPW1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
22	-	R3111Q221B	Vdet-IC	2.2V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
22	-	XC6213B222NR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
22	-	XC6217C332NR	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
22	-	XC6221C10BNR	LVR-IC	LDO, 1.05V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
22	-	XC6225B38ANR-G	LVR-IC	LDO, 3.85V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
225	-	LN3526N2212M	Vdet-IC	2.2V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
226	-	LN3526N2242M	Vdet-IC	2.2V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
227	-	LN3526N2252M	Vdet-IC	2.2V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
22A	-	AAT60022A-S15	Vdet-IC	2.2V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
22A	gf	AP6213A-21NHFGS	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22A	gf	AP6213A-21NHFGW	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22A	gf	AP6213A-21NHFPS	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
22A	gf	AP6213A-21NHFPW	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
22A	gj	AP6213A-21NHFGS1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22A	gj	AP6213A-21NHFGW1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22A	gj	AP6213A-21NHFPS1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
22A	gj	AP6213A-21NHFPW1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
22B	-	AAT60022B-S15	Vdet-IC	2.2V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
22B	gf	AP6213A-21NLFGS	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22B	gf	AP6213A-21NLFGW	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22B	gf	AP6213A-21NLFPS	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
22B	gf	AP6213A-21NLFPW	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
22B	gj	AP6213A-21NLFGS1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
22B	gj	AP6213A-21NLFGW1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22B	gj	AP6213A-21NLFPS1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
22B	gj	AP6213A-21NLFPW1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
22C	-	AAT60022C-S15	Vdet-IC	2.2V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
22C	gf	AP6213A-21NHNGS	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22C	gf	AP6213A-21NHNGW	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22C	gf	AP6213A-21NHNPS	LVR-IC	LDO, 2.1V±2%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
22C	gf	AP6213A-21NHNPW	LVR-IC	LDO, 2.1V±2%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
22C	gj	AP6213A-21NHNGS1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22C	gj	AP6213A-21NHNGW1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22C	gj	AP6213A-21NHNPS1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
22C	gj	AP6213A-21NHNPW1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
22D	-	AAT60022D-S15	Vdet-IC	2.2V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
22D	gf	AP6213A-21NLNGS	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22D	gf	AP6213A-21NLNGW	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22D	gf	AP6213A-21NLNPS	LVR-IC	LDO, 2.1V±2%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
22D	gf	AP6213A-21NLNPW	LVR-IC	LDO, 2.1V±2%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
22D	gj	AP6213A-21NLNGS1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22D	gj	AP6213A-21NLNGW1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22D	gj	AP6213A-21NLNPS1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
22D	gj	AP6213A-21NLNPW1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
22E	gf	AP6213A-21UHFGS	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22E	gf	AP6213A-21UHFGW	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22E	gf	AP6213A-21UHFPS	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
22E	gf	AP6213A-21UHFPW	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
22E	gj	AP6213A-21UHFGS1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22E	gj	AP6213A-21UHFGW1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22E	gj	AP6213A-21UHFPS1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
22E	gj	AP6213A-21UHFPW1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
22F	gf	AP6213A-21ULFGS	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22F	gf	AP6213A-21ULFGW	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22F	gf	AP6213A-21ULFPS	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
22F	gf	AP6213A-21ULFPW	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
22F	gj	AP6213A-21ULFGS1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22F	gj	AP6213A-21ULFGW1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22F	gj	AP6213A-21ULFPS1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
22F	gj	AP6213A-21ULFPW1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
22G	gf	AP6213A-21UHNGS	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22G	gf	AP6213A-21UHNGW	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22G	gf	AP6213A-21UHNPS	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
22G	gf	AP6213A-21UHNPW	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
22G	gj	AP6213A-21UHNGS1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22G	gj	AP6213A-21UHNGW1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22G	gj	AP6213A-21UHNPS1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
22G	gj	AP6213A-21UHNPW1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
22H	gf	AP6213A-21ULNGS	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22H	gf	AP6213A-21ULNGW	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22H	gf	AP6213A-21ULNPS	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
22H	gf	AP6213A-21ULNPW	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
22H	gj	AP6213A-21ULNGS1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22H	gj	AP6213A-21ULNGW1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22H	gj	AP6213A-21ULNPS1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
22H	gj	AP6213A-21ULNPW1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
22J	gf	AP6213A-21DHFGS	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22J	gf	AP6213A-21DHFGW	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22J	gf	AP6213A-21DHFPS	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
22J	gf	AP6213A-21DHFPW	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
22J	gj	AP6213A-21DHFGS1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22J	gj	AP6213A-21DHFGW1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22J	gj	AP6213A-21DHFPS1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
22J	gj	AP6213A-21DHFPW1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
22K	gf	AP6213A-21DLFGS	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22K	gf	AP6213A-21DLFGW	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22K	gf	AP6213A-21DLFPS	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
22K	gf	AP6213A-21DLFPW	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
22K	gj	AP6213A-21DLFGS1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22K	gj	AP6213A-21DLFGW1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22K	gj	AP6213A-21DLFPS1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
22K	gj	AP6213A-21DLFPW1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
22L	gf	AP6213A-21DHNGS	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
22L	gf	AP6213A-21DHNGW	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22L	gf	AP6213A-21DHNPS	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
22L	gf	AP6213A-21DHNPW	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
22L	gj	AP6213A-21DHNGS1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22L	gj	AP6213A-21DHNGW1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22L	gj	AP6213A-21DHNPS1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
22L	gj	AP6213A-21DHNPW1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
22M	gf	AP6213A-21DLNGS	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22M	gf	AP6213A-21DLNGW	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22M	gf	AP6213A-21DLNPS	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
22M	gf	AP6213A-21DLNPW	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
22M	gj	AP6213A-21DLNGS1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
22M	gj	AP6213A-21DLNGW1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
22M	gj	AP6213A-21DLNPS1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
22M	gj	AP6213A-21DLNPW1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
23	-	R3111Q231B	Vdet-IC	2.3V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
23	-	XC6213B232NR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
23	-	XC6217C342NR	LVR-IC	LDO, 3.4V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
23	-	XC6221C11BNR	LVR-IC	LDO, 1.15V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
23	-	XC6225B392NR-G	LVR-IC	LDO, 3.9V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
235	-	LN3526N2312M	Vdet-IC	2.3V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
236	-	LN3526N2342M	Vdet-IC	2.3V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
237	-	LN3526N2352M	Vdet-IC	2.3V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
23A	-	AAT60023A-S15	Vdet-IC	2.3V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
23B	-	AAT60023B-S15	Vdet-IC	2.3V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
23C	-	AAT60023C-S15	Vdet-IC	2.3V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
23D	-	AAT60023D-S15	Vdet-IC	2.3V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
24	-	R3111Q241B	Vdet-IC	2.4V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
24	-	XC6213B242NR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
24	-	XC6217C352NR	LVR-IC	LDO, 3.5V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
24	-	XC6221C12BNR	LVR-IC	LDO, 1.25V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
24	-	XC6225B39ANR-G	LVR-IC	LDO, 3.95V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
245	-	LN3526N2412M	Vdet-IC	2.4V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
246	-	LN3526N2442M	Vdet-IC	2.4V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
247	-	LN3526N2452M	Vdet-IC	2.4V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
24A	-	AAT60024A-S15	Vdet-IC	2.4V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
24A	-	AP6213A-10NHFGS	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24A	-	AP6213A-10NHFGW	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24A	-	AP6213A-10NHFPS	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
24A	-	AP6213A-10NHFPW	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
24A	gg	AP6213A-10NHFGS1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24A	gg	AP6213A-10NHFGW1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24A	gg	AP6213A-10NHFPS1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
24A	gg	AP6213A-10NHFPW1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
24B	-	AAT60024B-S15	Vdet-IC	2.4V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
24B	-	AP6213A-10NLFGS	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24B	-	AP6213A-10NLFGW	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24B	-	AP6213A-10NLFPS	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
24B	-	AP6213A-10NLFPW	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
24B	gg	AP6213A-10NLFGS1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24B	gg	AP6213A-10NLFGW1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24B	gg	AP6213A-10NLFPS1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
24B	gg	AP6213A-10NLFPW1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
24C	-	AAT60024C-S15	Vdet-IC	2.4V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
24C	-	AP6213A-10NHNGS	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24C	-	AP6213A-10NHNGW	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24C	-	AP6213A-10NHNPS	LVR-IC	LDO, 1.0V±2%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
24C	-	AP6213A-10NHNPW	LVR-IC	LDO, 1.0V±2%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
24C	gg	AP6213A-10NHNGS1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24C	gg	AP6213A-10NHNGW1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24C	gg	AP6213A-10NHNPS1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
24C	gg	AP6213A-10NHNPW1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
24D	-	AAT60024D-S15	Vdet-IC	2.4V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
24D	-	AP6213A-10NLNGS	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24D	-	AP6213A-10NLNGW	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24D	-	AP6213A-10NLNPS	LVR-IC	LDO, 1.0V±2%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
24D	-	AP6213A-10NLNPW	LVR-IC	LDO, 1.0V±2%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
24D	gg	AP6213A-10NLNGS1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24D	gg	AP6213A-10NLNGW1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24D	gg	AP6213A-10NLNPS1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
24D	gg	AP6213A-10NLNPW1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
24E	-	AP6213A-10UHFGS	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24E	-	AP6213A-10UHFGW	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24E	-	AP6213A-10UHFPS	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
24E	-	AP6213A-10UHFPW	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
24E	gg	AP6213A-10UHFGS1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24E	gg	AP6213A-10UHFGW1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24E	gg	AP6213A-10UHFPS1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
24E	gg	AP6213A-10UHFPW1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
24F	-	AP6213A-10ULFGS	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24F	-	AP6213A-10ULFGW	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24F	-	AP6213A-10ULFPS	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
24F	-	AP6213A-10ULFPW	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
24F	gg	AP6213A-10ULFGS1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24F	gg	AP6213A-10ULFGW1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24F	gg	AP6213A-10ULFPS1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
24F	gg	AP6213A-10ULFPW1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
24G	-	AP6213A-10UHNGS	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24G	-	AP6213A-10UHNGW	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24G	-	AP6213A-10UHNPS	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
24G	-	AP6213A-10UHNPW	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
24G	gg	AP6213A-10UHNGS1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24G	gg	AP6213A-10UHNGW1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24G	gg	AP6213A-10UHNPS1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
24G	gg	AP6213A-10UHNPW1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
24H	-	AP6213A-10ULNGS	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24H	-	AP6213A-10ULNGW	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24H	-	AP6213A-10ULNPS	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
24H	-	AP6213A-10ULNPW	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
24H	gg	AP6213A-10ULNGS1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24H	gg	AP6213A-10ULNGW1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24H	gg	AP6213A-10ULNPS1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
24H	gg	AP6213A-10ULNPW1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
24J	-	AP6213A-10DHFGS	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24J	-	AP6213A-10DHFGW	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24J	-	AP6213A-10DHFPS	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
24J	-	AP6213A-10DHFPW	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
24J	gg	AP6213A-10DHFGS1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24J	gg	AP6213A-10DHFGW1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24J	gg	AP6213A-10DHFPS1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
24J	gg	AP6213A-10DHFPW1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
24K	-	AP6213A-10DLFGS	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24K	-	AP6213A-10DLFGW	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24K	-	AP6213A-10DLFPS	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
24K	-	AP6213A-10DLFPW	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
24K	gg	AP6213A-10DLFGS1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24K	gg	AP6213A-10DLFGW1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24K	gg	AP6213A-10DLFPS1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
24K	gg	AP6213A-10DLFPW1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
24L	-	AP6213A-10DHNGS	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24L	-	AP6213A-10DHNGW	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24L	-	AP6213A-10DHNPS	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
24L	-	AP6213A-10DHNPW	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
24L	gg	AP6213A-10DHNGS1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24L	gg	AP6213A-10DHNGW1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24L	gg	AP6213A-10DHNPS1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
24L	gg	AP6213A-10DHNPW1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
24M	-	AP6213A-10DLNGS	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24M	-	AP6213A-10DLNGW	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24M	-	AP6213A-10DLNPS	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
24M	-	AP6213A-10DLNPW	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
24M	gg	AP6213A-10DLNGS1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
24M	gg	AP6213A-10DLNGW1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
24M	gg	AP6213A-10DLNPS1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
24M	gg	AP6213A-10DLNPW1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
25	-	R3111Q251B	Vdet-IC	2.5V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
25	-	XC6213B252NR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
25	-	XC6217C362NR	LVR-IC	LDO, 3.6V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
25	-	XC6221C13BNR	LVR-IC	LDO, 1.35V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
25	-	XC6225B402NR-G	LVR-IC	LDO, 4.0V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
255	-	LN3526N2512M	Vdet-IC	2.5V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
256	-	LN3526N2542M	Vdet-IC	2.5V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
257	-	LN3526N2552M	Vdet-IC	2.5V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
25A	-	AAT60025A-S15	Vdet-IC	2.5V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
25A	-	AP6213A-12NHFGS	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25A	-	AP6213A-12NHFGW	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25A	-	AP6213A-12NHFPS	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
25A	-	AP6213A-12NHFPW	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
25A	gg	AP6213A-12NHFGS1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25A	gg	AP6213A-12NHFGW1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25A	gg	AP6213A-12NHFPS1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
25A	gg	AP6213A-12NHFPW1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
25B	-	AAT60025B-S15	Vdet-IC	2.5V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
25B	-	AP6213A-12NLFGS	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25B	-	AP6213A-12NLFGW	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25B	-	AP6213A-12NLFPS	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
25B	-	AP6213A-12NLFPW	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
25B	gg	AP6213A-12NLFGS1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25B	gg	AP6213A-12NLFGW1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25B	gg	AP6213A-12NLFPS1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
25B	gg	AP6213A-12NLFPW1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
25C	-	AAT60025C-S15	Vdet-IC	2.5V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
25C	-	AP6213A-12NHNGS	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25C	-	AP6213A-12NHNGW	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25C	-	AP6213A-12NHNPS	LVR-IC	LDO, 1.2V±2%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
25C	-	AP6213A-12NHNPW	LVR-IC	LDO, 1.2V±2%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
25C	gg	AP6213A-12NHNGS1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25C	gg	AP6213A-12NHNGW1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25C	gg	AP6213A-12NHNPS1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
25C	gg	AP6213A-12NHNPW1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
25D	-	AAT60025D-S15	Vdet-IC	2.5V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
25D	-	AP6213A-12NLNGS	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25D	-	AP6213A-12NLNGW	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25D	-	AP6213A-12NLNPS	LVR-IC	LDO, 1.2V±2%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
25D	-	AP6213A-12NLNPW	LVR-IC	LDO, 1.2V±2%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
25D	gg	AP6213A-12NLNGS1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25D	gg	AP6213A-12NLNGW1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25D	gg	AP6213A-12NLNPS1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
25D	gg	AP6213A-12NLNPW1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
25E	-	AP6213A-12UHFGS	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25E	-	AP6213A-12UHFGW	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25E	-	AP6213A-12UHFPS	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
25E	-	AP6213A-12UHFPW	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
25E	gg	AP6213A-12UHFGS1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25E	gg	AP6213A-12UHFGW1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25E	gg	AP6213A-12UHFPS1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
25E	gg	AP6213A-12UHFPW1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
25F	-	AP6213A-12ULFGS	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25F	-	AP6213A-12ULFGW	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25F	-	AP6213A-12ULFPS	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
25F	-	AP6213A-12ULFPW	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
25F	gg	AP6213A-12ULFGS1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25F	gg	AP6213A-12ULFGW1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25F	gg	AP6213A-12ULFPS1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
25F	gg	AP6213A-12ULFPW1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
25G	-	AP6213A-12UHNGS	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25G	-	AP6213A-12UHNGW	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25G	-	AP6213A-12UHNPS	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
25G	-	AP6213A-12UHNPW	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
25G	gg	AP6213A-12UHNGS1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25G	gg	AP6213A-12UHNGW1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25G	gg	AP6213A-12UHNPS1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
25G	gg	AP6213A-12UHNPW1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
25H	-	AP6213A-12ULNGS	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25H	-	AP6213A-12ULNGW	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25H	-	AP6213A-12ULNPS	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
25H	-	AP6213A-12ULNPW	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
25H	gg	AP6213A-12ULNGS1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25H	gg	AP6213A-12ULNGW1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25H	gg	AP6213A-12ULNPS1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
25H	gg	AP6213A-12ULNPW1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
25J	-	AP6213A-12DHFGS	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25J	-	AP6213A-12DHFGW	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25J	-	AP6213A-12DHFPS	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
25J	-	AP6213A-12DHFPW	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
25J	gg	AP6213A-12DHFGS1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25J	gg	AP6213A-12DHFGW1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25J	gg	AP6213A-12DHFPS1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
25J	gg	AP6213A-12DHFPW1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
25K	-	AP6213A-12DLFGS	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25K	-	AP6213A-12DLFGW	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25K	-	AP6213A-12DLFPS	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
25K	-	AP6213A-12DLFPW	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
25K	gg	AP6213A-12DLFGS1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25K	gg	AP6213A-12DLFGW1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25K	gg	AP6213A-12DLFPS1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
25K	gg	AP6213A-12DLFPW1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
25L	-	AP6213A-12DHNGS	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25L	-	AP6213A-12DHNGW	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25L	-	AP6213A-12DHNPS	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
25L	-	AP6213A-12DHNPW	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
25L	gg	AP6213A-12DHNGS1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25L	gg	AP6213A-12DHNGW1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25L	gg	AP6213A-12DHNPS1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
25L	gg	AP6213A-12DHNPW1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
25M	-	AP6213A-12DLNGS	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25M	-	AP6213A-12DLNGW	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25M	-	AP6213A-12DLNPS	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
25M	-	AP6213A-12DLNPW	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
25M	gg	AP6213A-12DLNGS1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
25M	gg	AP6213A-12DLNGW1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
25M	gg	AP6213A-12DLNPS1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
25M	gg	AP6213A-12DLNPW1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
26	-	R3111Q261B	Vdet-IC	2.6V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
26	-	XC6213B262NR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
26	-	XC6217C372NR	LVR-IC	LDO, 3.7V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
26	-	XC6221C14BNR	LVR-IC	LDO, 1.45V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
26	-	XC6225B40ANR-G	LVR-IC	LDO, 4.05V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
265	-	LN3526N2612M	Vdet-IC	2.6V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
266	-	LN3526N2642M	Vdet-IC	2.6V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
267	-	LN3526N2652M	Vdet-IC	2.6V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
26A	-	AAT60026A-S15	Vdet-IC	2.6V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
26B	-	AAT60026B-S15	Vdet-IC	2.6V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
26C	-	AAT60026C-S15	Vdet-IC	2.6V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
26D	-	AAT60026D-S15	Vdet-IC	2.6V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
27	-	R3111Q271B	Vdet-IC	2.7V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
27	-	XC6213B272NR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
27	-	XC6217C382NR	LVR-IC	LDO, 3.8V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
27	-	XC6221C15BNR	LVR-IC	LDO, 1.55V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
275	-	LN3526N2712M	Vdet-IC	2.7V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
276	-	LN3526N2742M	Vdet-IC	2.7V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
277	-	LN3526N2752M	Vdet-IC	2.7V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
27A	-	AAT60027A-S15	Vdet-IC	2.7V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
27B	-	AAT60027B-S15	Vdet-IC	2.7V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
27C	-	AAT60027C-S15	Vdet-IC	2.7V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
27D	-	AAT60027D-S15	Vdet-IC	2.7V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
28	-	BFP280T	Si-npn	VHF/UHF, LN, 15V, 10mA, 80mW, B=50..150, 5GHz	SOT-143	24tc	-	5b	Vs
28	-	R3111Q281B	Vdet-IC	2.8V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
28	-	XC6213B282NR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
28	-	XC6217C392NR	LVR-IC	LDO, 3.9V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
28	-	XC6221C16BNR	LVR-IC	LDO, 1.65V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
285	-	LN3526N2812M	Vdet-IC	2.8V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
286	-	LN3526N2842M	Vdet-IC	2.8V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
287	-	LN3526N2852M	Vdet-IC	2.8V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
28A	-	AAT60028A-S15	Vdet-IC	2.8V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
28A	-	AP6213A-15NHFGS	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28A	-	AP6213A-15NHFGW	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28A	-	AP6213A-15NHFPS	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
28A	-	AP6213A-15NHFPW	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
28A	gg	AP6213A-15NHFGS1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
28A	gg	AP6213A-15NHFGW1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28A	gg	AP6213A-15NHFPS1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
28A	gg	AP6213A-15NHFPW1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
28B	-	AAT60028B-S15	Vdet-IC	2.8V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
28B	-	AP6213A-15NLFGS	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28B	-	AP6213A-15NLFGW	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28B	-	AP6213A-15NLFPS	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
28B	-	AP6213A-15NLFPW	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
28B	gg	AP6213A-15NLFGS1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28B	gg	AP6213A-15NLFGW1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28B	gg	AP6213A-15NLFPS1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
28B	gg	AP6213A-15NLFPW1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
28C	-	AAT60028C-S15	Vdet-IC	2.8V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
28C	-	AP6213A-15NHNGS	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28C	-	AP6213A-15NHNGW	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28C	-	AP6213A-15NHNPS	LVR-IC	LDO, 1.5V±2%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
28C	-	AP6213A-15NHNPW	LVR-IC	LDO, 1.5V±2%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
28C	gg	AP6213A-15NHNGS1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28C	gg	AP6213A-15NHNGW1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28C	gg	AP6213A-15NHNPS1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
28C	gg	AP6213A-15NHNPW1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
28D	-	AAT60028D-S15	Vdet-IC	2.8V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
28D	-	AP6213A-15NLNGS	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28D	-	AP6213A-15NLNGW	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28D	-	AP6213A-15NLNPS	LVR-IC	LDO, 1.5V±2%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
28D	-	AP6213A-15NLNPW	LVR-IC	LDO, 1.5V±2%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
28D	gg	AP6213A-15NLNGS1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28D	gg	AP6213A-15NLNGW1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28D	gg	AP6213A-15NLNPS1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
28D	gg	AP6213A-15NLNPW1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
28E	-	AP6213A-15UHFGS	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28E	-	AP6213A-15UHFGW	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28E	-	AP6213A-15UHFPS	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
28E	-	AP6213A-15UHFPW	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
28E	gg	AP6213A-15UHFGS1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28E	gg	AP6213A-15UHFGW1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28E	gg	AP6213A-15UHFPS1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
28E	gg	AP6213A-15UHFPW1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
28F	-	AP6213A-15ULFGS	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28F	-	AP6213A-15ULFGW	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28F	-	AP6213A-15ULFPS	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
28F	-	AP6213A-15ULFPW	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
28F	gg	AP6213A-15ULFGS1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28F	gg	AP6213A-15ULFGW1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28F	gg	AP6213A-15ULFPS1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
28F	gg	AP6213A-15ULFPW1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
28G	-	AP6213A-15UHNGS	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28G	-	AP6213A-15UHNGW	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28G	-	AP6213A-15UHNPS	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
28G	-	AP6213A-15UHNPW	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
28G	gg	AP6213A-15UHNGS1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28G	gg	AP6213A-15UHNGW1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28G	gg	AP6213A-15UHNPS1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
28G	gg	AP6213A-15UHNPW1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
28H	-	AP6213A-15ULNGS	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28H	-	AP6213A-15ULNGW	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28H	-	AP6213A-15ULNPS	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
28H	-	AP6213A-15ULNPW	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
28H	gg	AP6213A-15ULNGS1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28H	gg	AP6213A-15ULNGW1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28H	gg	AP6213A-15ULNPS1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
28H	gg	AP6213A-15ULNPW1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
28J	-	AP6213A-15DHFGS	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28J	-	AP6213A-15DHFGW	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28J	-	AP6213A-15DHFPS	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
28J	-	AP6213A-15DHFPW	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
28J	gg	AP6213A-15DHFGS1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28J	gg	AP6213A-15DHFGW1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28J	gg	AP6213A-15DHFPS1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
28J	gg	AP6213A-15DHFPW1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
28K	-	AP6213A-15DLFGS	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28K	-	AP6213A-15DLFGW	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28K	-	AP6213A-15DLFPS	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
28K	-	AP6213A-15DLFPW	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
28K	gg	AP6213A-15DLFGS1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28K	gg	AP6213A-15DLFGW1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28K	gg	AP6213A-15DLFPS1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
28K	gg	AP6213A-15DLFPW1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
28L	-	AP6213A-15DHNGS	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28L	-	AP6213A-15DHNGW	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28L	-	AP6213A-15DHNPS	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
28L	-	AP6213A-15DHNPW	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
28L	gg	AP6213A-15DHNGS1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28L	gg	AP6213A-15DHNGW1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28L	gg	AP6213A-15DHNPS1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
28L	gg	AP6213A-15DHNPW1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
28M	-	AP6213A-15DLNGS	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28M	-	AP6213A-15DLNGW	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28M	-	AP6213A-15DLNPS	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
28M	-	AP6213A-15DLNPW	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
28M	gg	AP6213A-15DLNGS1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
28M	gg	AP6213A-15DLNGW1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
28M	gg	AP6213A-15DLNPS1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
28M	gg	AP6213A-15DLNPW1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
29	-	R3111Q291B	Vdet-IC	2.9V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
29	-	XC6213B292NR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
29	-	XC6217C10ANR	LVR-IC	LDO, 1.05V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
29	-	XC6221C17BNR	LVR-IC	LDO, 1.75V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
295	-	LN3526N2912M	Vdet-IC	2.9V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
296	-	LN3526N2942M	Vdet-IC	2.9V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
297	-	LN3526N2952M	Vdet-IC	2.9V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
29A	-	AAT60029A-S15	Vdet-IC	2.9V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
29B	-	AAT60029B-S15	Vdet-IC	2.9V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
29C	-	AAT60029C-S15	Vdet-IC	2.9V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
29D	-	AAT60029D-S15	Vdet-IC	2.9V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
29R	-	S592TR	MMIC	UHF, 8V, 20mA, 160mW, Idss=50..500µA	SOT-143R	26fm	A3	5c	Vs
2A	-	R3132Q30EA	Vdet-IC	3V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2A	-	RQ5RW20AA	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
2A	-	XC6127N15CNR	Vdet-IC	1.5V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2A	-	XC6213B20ANR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
2A	-	XC6221C18BNR	LVR-IC	LDO, 1.85V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2AA	-	AP6213A-18NHFGS	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AA	-	AP6213A-18NHFGW	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AA	-	AP6213A-18NHFPS	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2AA	-	AP6213A-18NHFPW	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2AA	gg	AP6213A-18NHFGS1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AA	gg	AP6213A-18NHFGW1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AA	gg	AP6213A-18NHFPS1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2AA	gg	AP6213A-18NHFPW1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2AB	-	AP6213A-18NLFGS	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AB	-	AP6213A-18NLFGW	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AB	-	AP6213A-18NLFPS	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2AB	-	AP6213A-18NLFPW	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2AB	gg	AP6213A-18NLFGS1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AB	gg	AP6213A-18NLFGW1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AB	gg	AP6213A-18NLFPS1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2AB	gg	AP6213A-18NLFPW1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2AC	-	AP6213A-18NHNGS	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AC	-	AP6213A-18NHNGW	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AC	-	AP6213A-18NHNPS	LVR-IC	LDO, 1.8V±2%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2AC	-	AP6213A-18NHNPW	LVR-IC	LDO, 1.8V±2%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2AC	gg	AP6213A-18NHNGS1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AC	gg	AP6213A-18NHNGW1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AC	gg	AP6213A-18NHNPS1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2AC	gg	AP6213A-18NHNPW1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2AD	-	AP6213A-18NLNGS	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AD	-	AP6213A-18NLNGW	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AD	-	AP6213A-18NLNPS	LVR-IC	LDO, 1.8V±2%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2AD	-	AP6213A-18NLNPW	LVR-IC	LDO, 1.8V±2%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2AD	gg	AP6213A-18NLNGS1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2AD	gg	AP6213A-18NLNGW1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AD	gg	AP6213A-18NLNPS1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2AD	gg	AP6213A-18NLNPW1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2AE	-	AP6213A-18UHFGS	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AE	-	AP6213A-18UHFGW	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AE	-	AP6213A-18UHFPS	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2AE	-	AP6213A-18UHFPW	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2AE	gg	AP6213A-18UHFGS1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AE	gg	AP6213A-18UHFGW1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AE	gg	AP6213A-18UHFPS1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2AE	gg	AP6213A-18UHFPW1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2AF	-	AP6213A-18ULFGS	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AF	-	AP6213A-18ULFGW	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AF	-	AP6213A-18ULFPS	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2AF	-	AP6213A-18ULFPW	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2AF	gg	AP6213A-18ULFGS1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AF	gg	AP6213A-18ULFGW1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AF	gg	AP6213A-18ULFPS1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2AF	gg	AP6213A-18ULFPW1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2AG	-	AP6213A-18UHNGS	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AG	-	AP6213A-18UHNGW	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AG	-	AP6213A-18UHNPS	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2AG	-	AP6213A-18UHNPW	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2AG	gg	AP6213A-18UHNGS1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AG	gg	AP6213A-18UHNGW1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AG	gg	AP6213A-18UHNPS1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2AG	gg	AP6213A-18UHNPW1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2AH	-	AP6213A-18ULNGS	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AH	-	AP6213A-18ULNGW	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AH	-	AP6213A-18ULNPS	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2AH	-	AP6213A-18ULNPW	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2AH	gg	AP6213A-18ULNGS1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AH	gg	AP6213A-18ULNGW1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AH	gg	AP6213A-18ULNPS1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2AH	gg	AP6213A-18ULNPW1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2AJ	-	AP6213A-18DHFGS	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AJ	-	AP6213A-18DHFGW	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AJ	-	AP6213A-18DHFPS	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2AJ	-	AP6213A-18DHFPW	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2AJ	gg	AP6213A-18DHFGS1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AJ	gg	AP6213A-18DHFGW1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AJ	gg	AP6213A-18DHFPS1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2AJ	gg	AP6213A-18DHFPW1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2AK	-	AP6213A-18DLFGS	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AK	-	AP6213A-18DLFGW	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AK	-	AP6213A-18DLFPS	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2AK	-	AP6213A-18DLFPW	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2AK	gg	AP6213A-18DLFGS1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AK	gg	AP6213A-18DLFGW1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AK	gg	AP6213A-18DLFPS1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2AK	gg	AP6213A-18DLFPW1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2AL	-	AP6213A-18DHNGS	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AL	-	AP6213A-18DHNGW	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AL	-	AP6213A-18DHNPS	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2AL	-	AP6213A-18DHNPW	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2AL	gg	AP6213A-18DHNGS1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AL	gg	AP6213A-18DHNGW1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AL	gg	AP6213A-18DHNPS1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2AL	gg	AP6213A-18DHNPW1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2AM	-	AP6213A-18DLNGS	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AM	-	AP6213A-18DLNGW	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AM	-	AP6213A-18DLNPS	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2AM	-	AP6213A-18DLNPW	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2AM	gg	AP6213A-18DLNGS1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2AM	gg	AP6213A-18DLNGW1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2AM	gg	AP6213A-18DLNPS1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2AM	gg	AP6213A-18DLNPW1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2B	-	R3132Q31EA	Vdet-IC	3.1V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2B	-	RQ5RW21AA	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
2B	-	XC6127N17CNR	Vdet-IC	1.7V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2B	-	XC6213B21ANR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
2B	-	XC6221C19BNR	LVR-IC	LDO, 1.95V±20mV, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2C	-	R3132Q32EA	Vdet-IC	3.2V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2C	-	RQ5RW22AA	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
2C	-	XC6127N19CNR	Vdet-IC	1.9V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2C	-	XC6213B22ANR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
2C	-	XC6221C20BNR	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2D	-	R3132Q33EA	Vdet-IC	3.3V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2D	-	RQ5RW23AA	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
2D	-	XC6127N21CNR	Vdet-IC	2.1V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2D	-	XC6213B23ANR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
2D	-	XC6221C21BNR	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2E	-	R3132Q34EA	Vdet-IC	3.4V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2E	-	RQ5RW24AA	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
2E	-	UMZ7.5K	Z-diode	Dual, 7.28..7.60V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
2E	-	XC6127N23CNR	Vdet-IC	2.3V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2E	-	XC6213B24ANR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
2E	-	XC6221C22BNR	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2EA	-	AP6213A-22NHFGS	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EA	-	AP6213A-22NHFGW	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EA	-	AP6213A-22NHFPS	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2EA	-	AP6213A-22NHFPW	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2EA	gg	AP6213A-22NHFGS1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EA	gg	AP6213A-22NHFGW1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EA	gg	AP6213A-22NHFPS1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2EA	gg	AP6213A-22NHFPW1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2EB	-	AP6213A-22NLFGS	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EB	-	AP6213A-22NLFGW	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EB	-	AP6213A-22NLFPS	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2EB	-	AP6213A-22NLFPW	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2EB	gg	AP6213A-22NLFGS1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EB	gg	AP6213A-22NLFGW1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EB	gg	AP6213A-22NLFPS1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2EB	gg	AP6213A-22NLFPW1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2EC	-	AP6213A-22NHNGS	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EC	-	AP6213A-22NHNGW	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EC	-	AP6213A-22NHNPS	LVR-IC	LDO, 2.2V±2%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2EC	-	AP6213A-22NHNPW	LVR-IC	LDO, 2.2V±2%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2EC	gg	AP6213A-22NHNGS1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EC	gg	AP6213A-22NHNGW1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EC	gg	AP6213A-22NHNPS1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2EC	gg	AP6213A-22NHNPW1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2ED	-	AP6213A-22NLNGS	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ED	-	AP6213A-22NLNGW	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ED	-	AP6213A-22NLNPS	LVR-IC	LDO, 2.2V±2%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2ED	-	AP6213A-22NLNPW	LVR-IC	LDO, 2.2V±2%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2ED	gg	AP6213A-22NLNGS1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ED	gg	AP6213A-22NLNGW1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ED	gg	AP6213A-22NLNPS1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2ED	gg	AP6213A-22NLNPW1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2EE	-	AP6213A-22UHFGS	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EE	-	AP6213A-22UHFGW	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EE	-	AP6213A-22UHFPS	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2EE	-	AP6213A-22UHFPW	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2EE	gg	AP6213A-22UHFGS1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EE	gg	AP6213A-22UHFGW1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EE	gg	AP6213A-22UHFPS1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2EE	gg	AP6213A-22UHFPW1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2EF	-	AP6213A-22ULFGS	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EF	-	AP6213A-22ULFGW	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EF	-	AP6213A-22ULFPS	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2EF	-	AP6213A-22ULFPW	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2EF	gg	AP6213A-22ULFGS1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EF	gg	AP6213A-22ULFGW1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EF	gg	AP6213A-22ULFPS1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2EF	gg	AP6213A-22ULFPW1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2EG	-	AP6213A-22UHNGS	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EG	-	AP6213A-22UHNGW	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EG	-	AP6213A-22UHNPS	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2EG	-	AP6213A-22UHNPW	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2EG	gg	AP6213A-22UHNGS1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EG	gg	AP6213A-22UHNGW1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EG	gg	AP6213A-22UHNPS1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2EG	gg	AP6213A-22UHNPW1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2EH	-	AP6213A-22ULNGS	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EH	-	AP6213A-22ULNGW	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EH	-	AP6213A-22ULNPS	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2EH	-	AP6213A-22ULNPW	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2EH	gg	AP6213A-22ULNGS1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EH	gg	AP6213A-22ULNGW1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EH	gg	AP6213A-22ULNPS1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2EH	gg	AP6213A-22ULNPW1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2EJ	-	AP6213A-22DHFGS	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EJ	-	AP6213A-22DHFGW	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EJ	-	AP6213A-22DHFPS	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2EJ	-	AP6213A-22DHFPW	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2EJ	gg	AP6213A-22DHFGS1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EJ	gg	AP6213A-22DHFGW1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EJ	gg	AP6213A-22DHFPS1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2EJ	gg	AP6213A-22DHFPW1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2EK	-	AP6213A-22DLFGS	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EK	-	AP6213A-22DLFGW	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EK	-	AP6213A-22DLFPS	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2EK	-	AP6213A-22DLFPW	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2EK	gg	AP6213A-22DLFGS1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EK	gg	AP6213A-22DLFGW1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EK	gg	AP6213A-22DLFPS1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2EK	gg	AP6213A-22DLFPW1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2EL	-	AP6213A-22DHNGS	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EL	-	AP6213A-22DHNGW	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EL	-	AP6213A-22DHNPS	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2EL	-	AP6213A-22DHNPW	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2EL	gg	AP6213A-22DHNGS1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EL	gg	AP6213A-22DHNGW1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EL	gg	AP6213A-22DHNPS1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2EL	gg	AP6213A-22DHNPW1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2EM	-	AP6213A-22DLNGS	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2EM	-	AP6213A-22DLNGW	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2EM	-	AP6213A-22DLNPS	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2EM	-	AP6213A-22DLNPW	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2EM	gg	AP6213A-22DLNGS1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5ga	Anw
2EM	gg	AP6213A-22DLNGW1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR	SC-82	26vn	VR4	5ga	Anw
2EM	gg	AP6213A-22DLNPS1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2EM	gg	AP6213A-22DLNPW1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2F	-	R3132Q35EA	Vdet-IC	3.5V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2F	-	RQ5RW25AA	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
2F	-	XC6127N25CNR	Vdet-IC	2.5V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2F	-	XC6213B25ANR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
2F	-	XC6221C23BNR	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2G	-	R3132Q36EA	Vdet-IC	3.6V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2G	-	RQ5RW26AA	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
2GA	-	AP6213A-25NHFGS	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GA	-	AP6213A-25NHFGW	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GA	-	AP6213A-25NHFPS	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2GA	-	AP6213A-25NHFPW	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2GA	gg	AP6213A-25NHFGS1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GA	gg	AP6213A-25NHFGW1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GA	gg	AP6213A-25NHFPS1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2GA	gg	AP6213A-25NHFPW1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2GB	-	AP6213A-25NLFGS	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GB	-	AP6213A-25NLFGW	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GB	-	AP6213A-25NLFPS	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2GB	-	AP6213A-25NLFPW	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2GB	gg	AP6213A-25NLFGS1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GB	gg	AP6213A-25NLFGW1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GB	gg	AP6213A-25NLFPS1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2GB	gg	AP6213A-25NLFPW1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2GC	-	AP6213A-25NHNGS	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GC	-	AP6213A-25NHNGW	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GC	-	AP6213A-25NHNPS	LVR-IC	LDO, 2.5V±2%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2GC	-	AP6213A-25NHNPW	LVR-IC	LDO, 2.5V±2%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2GC	gg	AP6213A-25NHNGS1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GC	gg	AP6213A-25NHNGW1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GC	gg	AP6213A-25NHNPS1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2GC	gg	AP6213A-25NHNPW1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2GD	-	AP6213A-25NLNGS	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GD	-	AP6213A-25NLNGW	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GD	-	AP6213A-25NLNPS	LVR-IC	LDO, 2.5V±2%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2GD	-	AP6213A-25NLNPW	LVR-IC	LDO, 2.5V±2%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2GD	gg	AP6213A-25NLNGS1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GD	gg	AP6213A-25NLNGW1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GD	gg	AP6213A-25NLNPS1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2GD	gg	AP6213A-25NLNPW1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2GE	-	AP6213A-25UHFGS	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GE	-	AP6213A-25UHFGW	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GE	-	AP6213A-25UHFPS	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2GE	-	AP6213A-25UHFPW	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2GE	gg	AP6213A-25UHFGS1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GE	gg	AP6213A-25UHFGW1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GE	gg	AP6213A-25UHFPS1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2GE	gg	AP6213A-25UHFPW1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2GF	-	AP6213A-25ULFGS	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GF	-	AP6213A-25ULFGW	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GF	-	AP6213A-25ULFPS	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2GF	-	AP6213A-25ULFPW	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2GF	gg	AP6213A-25ULFGS1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GF	gg	AP6213A-25ULFGW1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GF	gg	AP6213A-25ULFPS1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2GF	gg	AP6213A-25ULFPW1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2GG	-	AP6213A-25UHNGS	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GG	-	AP6213A-25UHNGW	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GG	-	AP6213A-25UHNPS	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2GG	-	AP6213A-25UHNPW	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2GG	gg	AP6213A-25UHNGS1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GG	gg	AP6213A-25UHNGW1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GG	gg	AP6213A-25UHNPS1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2GG	gg	AP6213A-25UHNPW1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2GH	-	AP6213A-25ULNGS	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GH	-	AP6213A-25ULNGW	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GH	-	AP6213A-25ULNPS	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2GH	-	AP6213A-25ULNPW	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2GH	gg	AP6213A-25ULNGS1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GH	gg	AP6213A-25ULNGW1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GH	gg	AP6213A-25ULNPS1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2GH	gg	AP6213A-25ULNPW1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2GJ	-	AP6213A-25DHFGS	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GJ	-	AP6213A-25DHFGW	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GJ	-	AP6213A-25DHFPS	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2GJ	-	AP6213A-25DHFPW	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2GJ	gg	AP6213A-25DHFGS1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GJ	gg	AP6213A-25DHFGW1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GJ	gg	AP6213A-25DHFPS1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2GJ	gg	AP6213A-25DHFPW1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2GK	-	AP6213A-25DLFGS	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GK	-	AP6213A-25DLFGW	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GK	-	AP6213A-25DLFPS	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2GK	-	AP6213A-25DLFPW	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2GK	gg	AP6213A-25DLFGS1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GK	gg	AP6213A-25DLFGW1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GK	gg	AP6213A-25DLFPS1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2GK	gg	AP6213A-25DLFPW1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2GL	-	AP6213A-25DHNGS	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GL	-	AP6213A-25DHNGW	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GL	-	AP6213A-25DHNPS	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2GL	-	AP6213A-25DHNPW	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2GL	gg	AP6213A-25DHNGS1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GL	gg	AP6213A-25DHNGW1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GL	gg	AP6213A-25DHNPS1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2GL	gg	AP6213A-25DHNPW1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2GM	-	AP6213A-25DLNGS	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2GM	-	AP6213A-25DLNGW	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GM	-	AP6213A-25DLNPS	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2GM	-	AP6213A-25DLNPW	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2GM	gg	AP6213A-25DLNGS1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2GM	gg	AP6213A-25DLNGW1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2GM	gg	AP6213A-25DLNPS1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2GM	gg	AP6213A-25DLNPW1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2H	-	R3132Q37EA	Vdet-IC	3.7V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2H	-	RQ5RW27AA	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
2H	-	UMZ8.2K	Z-diode	Dual, 8.02..8.36V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
2H	-	XC6127N27CNR	Vdet-IC	2.7V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2H	-	XC6213B26ANR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
2H	-	XC6221C24BNR	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2J	-	IMP162JCUS	Vdet-IC	4.00V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
2J	-	R3132Q38EA	Vdet-IC	3.8V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2J	-	RQ5RW28AA	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
2K	-	R3132Q39EA	Vdet-IC	3.9V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2K	-	RQ5RW29AA	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
2K	-	UMZ11K	Z-diode	Dual, 10.76..11.22V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
2K	-	XC6127N29CNR	Vdet-IC	2.9V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2K	-	XC6213B27ANR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
2K	-	XC6221C25BNR	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2L	-	IMP162LCUS	Vdet-IC	4.63V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
2L	-	R3133Q30EA	Vdet-IC	3V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2L	-	RQ5RW20CA	LVR-IC	LDO, 2.0V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
2L	-	UMZ12K	Z-diode	Dual, 11.74..12.24V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
2L	-	XC6127N31CNR	Vdet-IC	3.1V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2L	-	XC6213B28ANR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
2L	-	XC6221C26BNR	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2LA	-	AP6213A-2JNHFGS	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LA	-	AP6213A-2JNHFGW	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LA	-	AP6213A-2JNHFPS	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2LA	-	AP6213A-2JNHFPW	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2LA	gg	AP6213A-2JNHFGS1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LA	gg	AP6213A-2JNHFGW1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LA	gg	AP6213A-2JNHFPS1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2LA	gg	AP6213A-2JNHFPW1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2LB	-	AP6213A-2JNLFGS	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LB	-	AP6213A-2JNLFGW	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LB	-	AP6213A-2JNLFPS	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2LB	-	AP6213A-2JNLFPW	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2LB	gg	AP6213A-2JNLFGS1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LB	gg	AP6213A-2JNLFGW1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LB	gg	AP6213A-2JNLFPS1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2LB	gg	AP6213A-2JNLFPW1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2LC	-	AP6213A-2JNHNGS	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LC	-	AP6213A-2JNHNGW	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LC	-	AP6213A-2JNHNPS	LVR-IC	LDO, 2.85V±2%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2LC	-	AP6213A-2JNHNPW	LVR-IC	LDO, 2.85V±2%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2LC	gg	AP6213A-2JNHNGS1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LC	gg	AP6213A-2JNHNGW1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LC	gg	AP6213A-2JNHNPS1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2LC	gg	AP6213A-2JNHNPW1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2LD	-	AP6213A-2JNLNGS	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LD	-	AP6213A-2JNLNGW	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LD	-	AP6213A-2JNLNPS	LVR-IC	LDO, 2.85V±2%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2LD	-	AP6213A-2JNLNPW	LVR-IC	LDO, 2.85V±2%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2LD	gg	AP6213A-2JNLNGS1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LD	gg	AP6213A-2JNLNGW1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LD	gg	AP6213A-2JNLNPS1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2LD	gg	AP6213A-2JNLNPW1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2LE	-	AP6213A-2JUHFGS	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LE	-	AP6213A-2JUHFGW	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LE	-	AP6213A-2JUHFPS	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2LE	-	AP6213A-2JUHFPW	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2LE	gg	AP6213A-2JUHFGS1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LE	gg	AP6213A-2JUHFGW1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LE	gg	AP6213A-2JUHFPS1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2LE	gg	AP6213A-2JUHFPW1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2LF	-	AP6213A-2JULFGS	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2LF	-	AP6213A-2JULFGW	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LF	-	AP6213A-2JULFPS	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2LF	-	AP6213A-2JULFPW	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2LF	gg	AP6213A-2JULFGS1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LF	gg	AP6213A-2JULFGW1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LF	gg	AP6213A-2JULFPS1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2LF	gg	AP6213A-2JULFPW1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2LG	-	AP6213A-2JUHNGS	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LG	-	AP6213A-2JUHNGW	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LG	-	AP6213A-2JUHNPS	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2LG	-	AP6213A-2JUHNPW	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2LG	gg	AP6213A-2JUHNGS1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LG	gg	AP6213A-2JUHNGW1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LG	gg	AP6213A-2JUHNPS1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2LG	gg	AP6213A-2JUHNPW1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2LH	-	AP6213A-2JULNGS	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LH	-	AP6213A-2JULNGW	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LH	-	AP6213A-2JULNPS	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2LH	-	AP6213A-2JULNPW	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2LH	gg	AP6213A-2JULNGS1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LH	gg	AP6213A-2JULNGW1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LH	gg	AP6213A-2JULNPS1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2LH	gg	AP6213A-2JULNPW1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2LJ	-	AP6213A-2JDHFGS	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LJ	-	AP6213A-2JDHFGW	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LJ	-	AP6213A-2JDHFPS	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2LJ	-	AP6213A-2JDHFPW	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2LJ	gg	AP6213A-2JDHFGS1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LJ	gg	AP6213A-2JDHFGW1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LJ	gg	AP6213A-2JDHFPS1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2LJ	gg	AP6213A-2JDHFPW1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2LK	-	AP6213A-2JDLFGS	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LK	-	AP6213A-2JDLFGW	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LK	-	AP6213A-2JDLFPS	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2LK	-	AP6213A-2JDLFPW	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2LK	gg	AP6213A-2JDLFGS1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LK	gg	AP6213A-2JDLFGW1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LK	gg	AP6213A-2JDLFPS1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2LK	gg	AP6213A-2JDLFPW1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2LL	-	AP6213A-2JDHNGS	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LL	-	AP6213A-2JDHNGW	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LL	-	AP6213A-2JDHNPS	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2LL	-	AP6213A-2JDHNPW	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2LL	gg	AP6213A-2JDHNGS1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LL	gg	AP6213A-2JDHNGW1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LL	gg	AP6213A-2JDHNPS1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2LL	gg	AP6213A-2JDHNPW1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2LM	-	AP6213A-2JDLNGS	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LM	-	AP6213A-2JDLNGW	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LM	-	AP6213A-2JDLNPS	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2LM	-	AP6213A-2JDLNPW	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2LM	gg	AP6213A-2JDLNGS1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2LM	gg	AP6213A-2JDLNGW1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2LM	gg	AP6213A-2JDLNPS1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2LM	gg	AP6213A-2JDLNPW1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2M	-	IMP162MCUS	Vdet-IC	4.38V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
2M	-	R3133Q31EA	Vdet-IC	3.1V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2M	-	RQ5RW21CA	LVR-IC	LDO, 2.1V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
2M	-	UMZ15K	Z-diode	Dual, 14.34..14.98V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
2M	-	XC6127N33CNR	Vdet-IC	3.3V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2M	-	XC6213B29ANR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
2M	-	XC6221C27BNR	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2M3	-	S-5844A70DB-A4T2U3	Tdet-IC	+70°C, 10°C hysteresis, -ODO	HSNT-4	78a9	TDET1	5e	Sii
2M3	-	S-5844A70DB-I4T1U3	Tdet-IC	+70°C, 10°C hysteresis, -ODO	SNT-4A	42a9	TDET1	5b	Sii
2MA	-	AP6213A-30NHFGS	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MA	-	AP6213A-30NHFGW	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MA	-	AP6213A-30NHFPS	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2MA	-	AP6213A-30NHFPW	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2MA	-	S-5844A75CB-A4T2U3	Tdet-IC	+75°C, 10°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2MA	-	S-5844A75CB-I4T1U3	Tdet-IC	+75°C, 10°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2MA	gg	AP6213A-30NHFGS1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MA	gg	AP6213A-30NHFGW1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MA	gg	AP6213A-30NHFPS1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2MA	gg	AP6213A-30NHFPW1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2MB	-	AP6213A-30NLFGS	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MB	-	AP6213A-30NLFGW	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MB	-	AP6213A-30NLFPS	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2MB	-	AP6213A-30NLFPW	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2MB	-	S-5844A80CB-A4T2U3	Tdet-IC	+80°C, 10°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2MB	-	S-5844A80CB-I4T1U3	Tdet-IC	+80°C, 10°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2MB	gg	AP6213A-30NLFGS1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MB	gg	AP6213A-30NLFGW1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MB	gg	AP6213A-30NLFPS1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2MB	gg	AP6213A-30NLFPW1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2MC	-	AP6213A-30NHNGS	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MC	-	AP6213A-30NHNGW	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MC	-	AP6213A-30NHNPS	LVR-IC	LDO, 3.0V±2%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2MC	-	AP6213A-30NHNPW	LVR-IC	LDO, 3.0V±2%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2MC	-	S-5844A85CB-A4T2U3	Tdet-IC	+85°C, 10°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2MC	-	S-5844A85CB-I4T1U3	Tdet-IC	+85°C, 10°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2MC	gg	AP6213A-30NHNGS1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MC	gg	AP6213A-30NHNGW1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MC	gg	AP6213A-30NHNPS1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2MC	gg	AP6213A-30NHNPW1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2MD	-	AP6213A-30NLNGS	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MD	-	AP6213A-30NLNGW	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MD	-	AP6213A-30NLNPS	LVR-IC	LDO, 3.0V±2%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2MD	-	AP6213A-30NLNPW	LVR-IC	LDO, 3.0V±2%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2MD	-	S-5844A90CB-A4T2U3	Tdet-IC	+90°C, 10°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2MD	-	S-5844A90CB-I4T1U3	Tdet-IC	+90°C, 10°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2MD	gg	AP6213A-30NLNGS1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MD	gg	AP6213A-30NLNGW1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MD	gg	AP6213A-30NLNPS1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2MD	gg	AP6213A-30NLNPW1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2ME	-	AP6213A-30UHFGS	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ME	-	AP6213A-30UHFGW	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ME	-	AP6213A-30UHFPS	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2ME	-	AP6213A-30UHFPW	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2ME	-	S-5844A95CB-A4T2U3	Tdet-IC	+95°C, 10°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2ME	-	S-5844A95CB-I4T1U3	Tdet-IC	+95°C, 10°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2ME	gg	AP6213A-30UHFGS1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ME	gg	AP6213A-30UHFGW1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ME	gg	AP6213A-30UHFPS1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2ME	gg	AP6213A-30UHFPW1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2MF	-	AP6213A-30ULFGS	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MF	-	AP6213A-30ULFGW	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MF	-	AP6213A-30ULFPS	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2MF	-	AP6213A-30ULFPW	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2MF	-	S-5844A55CB-A4T2U3	Tdet-IC	+55°C, 10°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2MF	gg	AP6213A-30ULFGS1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MF	gg	AP6213A-30ULFGW1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MF	gg	AP6213A-30ULFPS1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2MF	gg	AP6213A-30ULFPW1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2MG	-	AP6213A-30UHNGS	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MG	-	AP6213A-30UHNGW	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MG	-	AP6213A-30UHNPS	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2MG	-	AP6213A-30UHNPW	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2MG	-	S-5844A60CB-A4T2U3	Tdet-IC	+60°C, 10°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2MG	-	S-5844A60CB-I4T1U3	Tdet-IC	+60°C, 10°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2MG	gg	AP6213A-30UHNGS1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MG	gg	AP6213A-30UHNGW1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MG	gg	AP6213A-30UHNPS1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2MG	gg	AP6213A-30UHNPW1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2MH	-	AP6213A-30ULNGS	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MH	-	AP6213A-30ULNGW	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MH	-	AP6213A-30ULNPS	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2MH	-	AP6213A-30ULNPW	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2MH	-	S-5844A65CB-A4T2U3	Tdet-IC	+65°C, 10°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2MH	-	S-5844A65CB-I4T1U3	Tdet-IC	+65°C, 10°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2MH	gg	AP6213A-30ULNGS1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2MH	gg	AP6213A-30ULNGW1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MH	gg	AP6213A-30ULNPS1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2MH	gg	AP6213A-30ULNPW1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2MI	-	S-5844A70CB-A4T2U3	Tdet-IC	+70°C, 10°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2MI	-	S-5844A70CB-I4T1U3	Tdet-IC	+70°C, 10°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2MJ	-	AP6213A-30DHFGS	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MJ	-	AP6213A-30DHFGW	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MJ	-	AP6213A-30DHFPS	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2MJ	-	AP6213A-30DHFPW	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2MJ	gg	AP6213A-30DHFGS1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MJ	gg	AP6213A-30DHFGW1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MJ	gg	AP6213A-30DHFPS1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2MJ	gg	AP6213A-30DHFPW1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2MK	-	AP6213A-30DLFGS	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MK	-	AP6213A-30DLFGW	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MK	-	AP6213A-30DLFPS	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2MK	-	AP6213A-30DLFPW	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2MK	gg	AP6213A-30DLFGS1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MK	gg	AP6213A-30DLFGW1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MK	gg	AP6213A-30DLFPS1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2MK	gg	AP6213A-30DLFPW1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2ML	-	AP6213A-30DHNGS	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ML	-	AP6213A-30DHNGW	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ML	-	AP6213A-30DHNPS	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2ML	-	AP6213A-30DHNPW	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2ML	gg	AP6213A-30DHNGS1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ML	gg	AP6213A-30DHNGW1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ML	gg	AP6213A-30DHNPS1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2ML	gg	AP6213A-30DHNPW1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2MM	-	AP6213A-30DLNGS	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MM	-	AP6213A-30DLNGW	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MM	-	AP6213A-30DLNPS	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2MM	-	AP6213A-30DLNPW	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2MM	gg	AP6213A-30DLNGS1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2MM	gg	AP6213A-30DLNGW1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2MM	gg	AP6213A-30DLNPS1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2MM	gg	AP6213A-30DLNPW1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2MR	-	S-5844A75DB-A4T2U3	Tdet-IC	+75°C, 10°C hysteresis, -ODO	HSNT-4	78a9	TDET1	5e	Sii
2MR	-	S-5844A75DB-I4T1U3	Tdet-IC	+75°C, 10°C hysteresis, -ODO	SNT-4A	42a9	TDET1	5b	Sii
2MS	-	S-5844A80DB-A4T2U3	Tdet-IC	+80°C, 10°C hysteresis, -ODO	HSNT-4	78a9	TDET1	5e	Sii
2MS	-	S-5844A80DB-I4T1U3	Tdet-IC	+80°C, 10°C hysteresis, -ODO	SNT-4A	42a9	TDET1	5b	Sii
2MT	-	S-5844A85DB-A4T2U3	Tdet-IC	+85°C, 10°C hysteresis, -ODO	HSNT-4	78a9	TDET1	5e	Sii
2MT	-	S-5844A85DB-I4T1U3	Tdet-IC	+85°C, 10°C hysteresis, -ODO	SNT-4A	42a9	TDET1	5b	Sii
2MU	-	S-5844A90DB-A4T2U3	Tdet-IC	+90°C, 10°C hysteresis, -ODO	HSNT-4	78a9	TDET1	5e	Sii
2MU	-	S-5844A90DB-I4T1U3	Tdet-IC	+90°C, 10°C hysteresis, -ODO	SNT-4A	42a9	TDET1	5b	Sii
2MV	-	S-5844A95DB-A4T2U3	Tdet-IC	+95°C, 10°C hysteresis, -ODO	HSNT-4	78a9	TDET1	5e	Sii
2MV	-	S-5844A95DB-I4T1U3	Tdet-IC	+95°C, 10°C hysteresis, -ODO	SNT-4A	42a9	TDET1	5b	Sii
2MX	-	S-5844A55DB-A4T2U3	Tdet-IC	+55°C, 10°C hysteresis, -ODO	HSNT-4	78a9	TDET1	5e	Sii
2MY	-	S-5844A60DB-A4T2U3	Tdet-IC	+60°C, 10°C hysteresis, -ODO	HSNT-4	78a9	TDET1	5e	Sii
2MY	-	S-5844A60DB-I4T1U3	Tdet-IC	+60°C, 10°C hysteresis, -ODO	SNT-4A	42a9	TDET1	5b	Sii
2MZ	-	S-5844A65DB-A4T2U3	Tdet-IC	+65°C, 10°C hysteresis, -ODO	HSNT-4	78a9	TDET1	5e	Sii
2MZ	-	S-5844A65DB-I4T1U3	Tdet-IC	+65°C, 10°C hysteresis, -ODO	SNT-4A	42a9	TDET1	5b	Sii
2N	-	R3133Q32EA	Vdet-IC	3.2V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2N	-	RQ5RW22CA	LVR-IC	LDO, 2.2V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
2N	-	UMZ16K	Z-diode	Dual, 15.85..16.51V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
2N	-	XC6127N35CNR	Vdet-IC	3.5V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2N	-	XC6221C28BNR	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2NA	-	AP6213A-32NHFGS	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NA	-	AP6213A-32NHFGW	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NA	-	AP6213A-32NHFPS	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2NA	-	AP6213A-32NHFPW	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2NA	gg	AP6213A-32NHFGS1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NA	gg	AP6213A-32NHFGW1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NA	gg	AP6213A-32NHFPS1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2NA	gg	AP6213A-32NHFPW1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2NB	-	AP6213A-32NLFGS	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NB	-	AP6213A-32NLFGW	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NB	-	AP6213A-32NLFPS	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2NB	-	AP6213A-32NLFPW	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2NB	gg	AP6213A-32NLFGS1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2NB	gg	AP6213A-32NLFGW1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NB	gg	AP6213A-32NLFPS1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2NB	gg	AP6213A-32NLFPW1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2NC	-	AP6213A-32NHNGS	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NC	-	AP6213A-32NHNGW	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NC	-	AP6213A-32NHNPS	LVR-IC	LDO, 3.1V±2%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2NC	-	AP6213A-32NHNPW	LVR-IC	LDO, 3.1V±2%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2NC	gg	AP6213A-32NHNGS1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NC	gg	AP6213A-32NHNGW1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NC	gg	AP6213A-32NHNPS1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2NC	gg	AP6213A-32NHNPW1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2ND	-	AP6213A-32NLNGS	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ND	-	AP6213A-32NLNGW	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ND	-	AP6213A-32NLNPS	LVR-IC	LDO, 3.1V±2%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2ND	-	AP6213A-32NLNPW	LVR-IC	LDO, 3.1V±2%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2ND	gg	AP6213A-32NLNGS1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ND	gg	AP6213A-32NLNGW1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ND	gg	AP6213A-32NLNPS1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2ND	gg	AP6213A-32NLNPW1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2NE	-	AP6213A-32UHFGS	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NE	-	AP6213A-32UHFGW	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NE	-	AP6213A-32UHFPS	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2NE	-	AP6213A-32UHFPW	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2NE	gg	AP6213A-32UHFGS1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NE	gg	AP6213A-32UHFGW1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NE	gg	AP6213A-32UHFPS1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2NE	gg	AP6213A-32UHFPW1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2NF	-	AP6213A-32ULFGS	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NF	-	AP6213A-32ULFGW	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NF	-	AP6213A-32ULFPS	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2NF	-	AP6213A-32ULFPW	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2NF	gg	AP6213A-32ULFGS1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NF	gg	AP6213A-32ULFGW1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NF	gg	AP6213A-32ULFPS1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2NF	gg	AP6213A-32ULFPW1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2NG	-	AP6213A-32UHNGS	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NG	-	AP6213A-32UHNGW	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NG	-	AP6213A-32UHNPS	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2NG	-	AP6213A-32UHNPW	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2NG	gg	AP6213A-32UHNGS1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NG	gg	AP6213A-32UHNGW1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NG	gg	AP6213A-32UHNPS1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2NG	gg	AP6213A-32UHNPW1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2NH	-	AP6213A-32ULNGS	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NH	-	AP6213A-32ULNGW	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NH	-	AP6213A-32ULNPS	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2NH	-	AP6213A-32ULNPW	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2NH	gg	AP6213A-32ULNGS1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NH	gg	AP6213A-32ULNGW1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NH	gg	AP6213A-32ULNPS1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2NH	gg	AP6213A-32ULNPW1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2NJ	-	AP6213A-32DHFGS	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NJ	-	AP6213A-32DHFGW	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NJ	-	AP6213A-32DHFPS	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2NJ	-	AP6213A-32DHFPW	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2NJ	gg	AP6213A-32DHFGS1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NJ	gg	AP6213A-32DHFGW1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NJ	gg	AP6213A-32DHFPS1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2NJ	gg	AP6213A-32DHFPW1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2NK	-	AP6213A-32DLFGS	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NK	-	AP6213A-32DLFGW	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NK	-	AP6213A-32DLFPS	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2NK	-	AP6213A-32DLFPW	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2NK	gg	AP6213A-32DLFGS1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NK	gg	AP6213A-32DLFGW1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NK	gg	AP6213A-32DLFPS1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2NK	gg	AP6213A-32DLFPW1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2NL	-	AP6213A-32DHNGS	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NL	-	AP6213A-32DHNGW	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NL	-	AP6213A-32DHNPS	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2NL	-	AP6213A-32DHNPW	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2NL	gg	AP6213A-32DHNGS1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NL	gg	AP6213A-32DHNGW1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NL	gg	AP6213A-32DHNPS1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2NL	gg	AP6213A-32DHNPW1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2NM	-	AP6213A-32DLNGS	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NM	-	AP6213A-32DLNGW	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NM	-	AP6213A-32DLNPS	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2NM	-	AP6213A-32DLNPW	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2NM	gg	AP6213A-32DLNGS1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2NM	gg	AP6213A-32DLNGW1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2NM	gg	AP6213A-32DLNPS1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2NM	gg	AP6213A-32DLNPW1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2OA	-	S-5844A75CC-A4T2U3	Tdet-IC	+75°C, 15°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2OA	-	S-5844A75CC-I4T1U3	Tdet-IC	+75°C, 15°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2OB	-	S-5844A80CC-A4T2U3	Tdet-IC	+80°C, 15°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2OB	-	S-5844A80CC-I4T1U3	Tdet-IC	+80°C, 15°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2OC	-	S-5844A85CC-A4T2U3	Tdet-IC	+85°C, 15°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2OC	-	S-5844A85CC-I4T1U3	Tdet-IC	+85°C, 15°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2OD	-	S-5844A90CC-A4T2U3	Tdet-IC	+90°C, 15°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2OD	-	S-5844A90CC-I4T1U3	Tdet-IC	+90°C, 15°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2OE	-	S-5844A95CC-A4T2U3	Tdet-IC	+95°C, 15°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2OE	-	S-5844A95CC-I4T1U3	Tdet-IC	+95°C, 15°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2OF	-	S-5844A55CC-A4T2U3	Tdet-IC	+55°C, 15°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2OG	-	S-5844A60CC-A4T2U3	Tdet-IC	+60°C, 15°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2OG	-	S-5844A60CC-I4T1U3	Tdet-IC	+60°C, 15°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2OH	-	S-5844A65CC-A4T2U3	Tdet-IC	+65°C, 15°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2OH	-	S-5844A65CC-I4T1U3	Tdet-IC	+65°C, 15°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2OI	-	S-5844A70CC-A4T2U3	Tdet-IC	+70°C, 15°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2OI	-	S-5844A70CC-I4T1U3	Tdet-IC	+70°C, 15°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2P	-	R3133Q33EA	Vdet-IC	3.3V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2P	-	RQ5RW23CA	LVR-IC	LDO, 2.3V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
2P	-	UMZ18K	Z-diode	Dual, 17.56..18.35V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
2P	-	XC6127N37CNR	Vdet-IC	3.7V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2P	-	XC6221C29BNR	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2Q	-	R3133Q34EA	Vdet-IC	3.4V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2Q	-	UMZ20K	Z-diode	Dual, 19.52..20.39V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
2QA	-	AP6213A-33NHFGS	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QA	-	AP6213A-33NHFGW	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QA	-	AP6213A-33NHFPS	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2QA	-	AP6213A-33NHFPW	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2QA	-	S-5844A75CD-A4T2U3	Tdet-IC	+75°C, 20°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2QA	-	S-5844A75CD-I4T1U3	Tdet-IC	+75°C, 20°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2QA	gg	AP6213A-33NHFGS1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QA	gg	AP6213A-33NHFGW1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QA	gg	AP6213A-33NHFPS1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2QA	gg	AP6213A-33NHFPW1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2QB	-	AP6213A-33NLFGS	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QB	-	AP6213A-33NLFGW	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QB	-	AP6213A-33NLFPS	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2QB	-	AP6213A-33NLFPW	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2QB	-	S-5844A80CD-A4T2U3	Tdet-IC	+80°C, 20°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2QB	-	S-5844A80CD-I4T1U3	Tdet-IC	+80°C, 20°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2QB	gg	AP6213A-33NLFGS1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QB	gg	AP6213A-33NLFGW1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QB	gg	AP6213A-33NLFPS1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2QB	gg	AP6213A-33NLFPW1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2QC	-	AP6213A-33NHNGS	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QC	-	AP6213A-33NHNGW	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QC	-	AP6213A-33NHNPS	LVR-IC	LDO, 3.3V±2%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2QC	-	AP6213A-33NHNPW	LVR-IC	LDO, 3.3V±2%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2QC	-	S-5844A85CD-A4T2U3	Tdet-IC	+85°C, 20°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2QC	-	S-5844A85CD-I4T1U3	Tdet-IC	+85°C, 20°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2QC	gg	AP6213A-33NHNGS1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QC	gg	AP6213A-33NHNGW1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QC	gg	AP6213A-33NHNPS1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2QC	gg	AP6213A-33NHNPW1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2QD	-	AP6213A-33NLNGS	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QD	-	AP6213A-33NLNGW	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QD	-	AP6213A-33NLNPS	LVR-IC	LDO, 3.3V±2%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2QD	-	AP6213A-33NLNPW	LVR-IC	LDO, 3.3V±2%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2QD	-	S-5844A90CD-A4T2U3	Tdet-IC	+90°C, 20°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2QD	-	S-5844A90CD-I4T1U3	Tdet-IC	+90°C, 20°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2QD	gg	AP6213A-33NLNGS1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QD	gg	AP6213A-33NLNGW1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QD	gg	AP6213A-33NLNPS1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2QD	gg	AP6213A-33NLNPW1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2QE	-	AP6213A-33UHFGS	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QE	-	AP6213A-33UHFGW	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QE	-	AP6213A-33UHFPS	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2QE	-	AP6213A-33UHFPW	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2QE	-	S-5844A95CD-A4T2U3	Tdet-IC	+95°C, 20°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2QE	-	S-5844A95CD-I4T1U3	Tdet-IC	+95°C, 20°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2QE	gg	AP6213A-33UHFGS1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QE	gg	AP6213A-33UHFGW1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QE	gg	AP6213A-33UHFPS1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2QE	gg	AP6213A-33UHFPW1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2QF	-	AP6213A-33ULFGS	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QF	-	AP6213A-33ULFGW	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QF	-	AP6213A-33ULFPS	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2QF	-	AP6213A-33ULFPW	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2QF	-	S-5844A55CD-A4T2U3	Tdet-IC	+55°C, 20°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2QF	gg	AP6213A-33ULFGS1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QF	gg	AP6213A-33ULFGW1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QF	gg	AP6213A-33ULFPS1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2QF	gg	AP6213A-33ULFPW1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2QG	-	AP6213A-33UHNGS	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QG	-	AP6213A-33UHNGW	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QG	-	AP6213A-33UHNPS	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2QG	-	AP6213A-33UHNPW	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2QG	-	S-5844A60CD-A4T2U3	Tdet-IC	+60°C, 20°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2QG	-	S-5844A60CD-I4T1U3	Tdet-IC	+60°C, 20°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2QG	gg	AP6213A-33UHNGS1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QG	gg	AP6213A-33UHNGW1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QG	gg	AP6213A-33UHNPS1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2QG	gg	AP6213A-33UHNPW1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2QH	-	AP6213A-33ULNGS	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QH	-	AP6213A-33ULNGW	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QH	-	AP6213A-33ULNPS	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2QH	-	AP6213A-33ULNPW	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2QH	-	S-5844A65CD-A4T2U3	Tdet-IC	+65°C, 20°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2QH	-	S-5844A65CD-I4T1U3	Tdet-IC	+65°C, 20°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2QH	gg	AP6213A-33ULNGS1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QH	gg	AP6213A-33ULNGW1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QH	gg	AP6213A-33ULNPS1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2QH	gg	AP6213A-33ULNPW1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2QI	-	S-5844A70CD-A4T2U3	Tdet-IC	+70°C, 20°C hysteresis, +ODO	HSNT-4	78a9	TDET1	5e	Sii
2QI	-	S-5844A70CD-I4T1U3	Tdet-IC	+70°C, 20°C hysteresis, +ODO	SNT-4A	42a9	TDET1	5b	Sii
2QJ	-	AP6213A-33DHFGS	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QJ	-	AP6213A-33DHFGW	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QJ	-	AP6213A-33DHFPS	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2QJ	-	AP6213A-33DHFPW	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2QJ	gg	AP6213A-33DHFGS1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QJ	gg	AP6213A-33DHFGW1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QJ	gg	AP6213A-33DHFPS1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2QJ	gg	AP6213A-33DHFPW1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2QK	-	AP6213A-33DLFGS	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QK	-	AP6213A-33DLFGW	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QK	-	AP6213A-33DLFPS	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2QK	-	AP6213A-33DLFPW	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2QK	gg	AP6213A-33DLFGS1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QK	gg	AP6213A-33DLFGW1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QK	gg	AP6213A-33DLFPS1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2QK	gg	AP6213A-33DLFPW1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2QL	-	AP6213A-33DHNGS	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QL	-	AP6213A-33DHNGW	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QL	-	AP6213A-33DHNPS	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2QL	-	AP6213A-33DHNPW	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2QL	gg	AP6213A-33DHNGS1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QL	gg	AP6213A-33DHNGW1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2QL	gg	AP6213A-33DHNPS1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2QL	gg	AP6213A-33DHNPW1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2QM	-	AP6213A-33DLNGS	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QM	-	AP6213A-33DLNGW	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QM	-	AP6213A-33DLNPS	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2QM	-	AP6213A-33DLNPW	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2QM	gg	AP6213A-33DLNGS1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2QM	gg	AP6213A-33DLNGW1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2QM	gg	AP6213A-33DLNPS1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2QM	gg	AP6213A-33DLNPW1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2R	-	IMP162RCUS	Vdet-IC	2.63V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
2R	-	R3133Q35EA	Vdet-IC	3.5V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2R	-	RQ5RW24CA	LVR-IC	LDO, 2.4V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
2R	-	UMZ22K	Z-diode	Dual, 21.54..22.47V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
2R	-	XC6127N39CNR	Vdet-IC	3.9V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2R	-	XC6221C30BNR	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2S	-	IMP162SCUS	Vdet-IC	2.93V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
2S	-	R3133Q36EA	Vdet-IC	3.6V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2S	-	RQ5RW25CA	LVR-IC	LDO, 2.5V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
2S	-	UMZ24K	Z-diode	Dual, 23.72..24.78V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
2S	-	XC6127N41CNR	Vdet-IC	4.1V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2S	-	XC6221C31BNR	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2T	-	IMP162TCUS	Vdet-IC	3.08V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
2T	-	R3133Q37EA	Vdet-IC	3.7V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2T	-	RQ5RW26CA	LVR-IC	LDO, 2.6V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
2T	-	UMZ27K	Z-diode	Dual, 26.19..27.53V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
2T	-	XC6127N43CNR	Vdet-IC	4.3V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2T	-	XC6221C32BNR	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2U	-	R3133Q38EA	Vdet-IC	3.8V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2U	-	RQ5RW27CA	LVR-IC	LDO, 2.7V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
2U	-	UMZ30K	Z-diode	Dual, 29.19..30.69V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
2U	-	XC6127N45CNR	Vdet-IC	4.5V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2U	-	XC6221C33BNR	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2V	-	R3133Q39EA	Vdet-IC	3.9V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
2V	-	RQ5RW28CA	LVR-IC	LDO, 2.8V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
2V	-	UMZ33K	Z-diode	Dual, 32.15..33.79V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
2V	-	XC6127N47CNR	Vdet-IC	4.7V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2V	-	XC6221C34BNR	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2VA	-	AP6213A-36NHFGS	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VA	-	AP6213A-36NHFGW	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VA	-	AP6213A-36NHFPS	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2VA	-	AP6213A-36NHFPW	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2VA	gg	AP6213A-36NHFGS1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VA	gg	AP6213A-36NHFGW1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VA	gg	AP6213A-36NHFPS1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2VA	gg	AP6213A-36NHFPW1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2VB	-	AP6213A-36NLFGS	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VB	-	AP6213A-36NLFGW	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VB	-	AP6213A-36NLFPS	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2VB	-	AP6213A-36NLFPW	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2VB	gg	AP6213A-36NLFGS1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VB	gg	AP6213A-36NLFGW1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VB	gg	AP6213A-36NLFPS1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2VB	gg	AP6213A-36NLFPW1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2VC	-	AP6213A-36NHNGS	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VC	-	AP6213A-36NHNGW	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VC	-	AP6213A-36NHNPS	LVR-IC	LDO, 3.6V±2%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2VC	-	AP6213A-36NHNPW	LVR-IC	LDO, 3.6V±2%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2VC	gg	AP6213A-36NHNGS1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VC	gg	AP6213A-36NHNGW1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VC	gg	AP6213A-36NHNPS1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2VC	gg	AP6213A-36NHNPW1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2VD	-	AP6213A-36NLNGS	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VD	-	AP6213A-36NLNGW	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VD	-	AP6213A-36NLNPS	LVR-IC	LDO, 3.6V±2%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2VD	-	AP6213A-36NLNPW	LVR-IC	LDO, 3.6V±2%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2VD	gg	AP6213A-36NLNGS1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VD	gg	AP6213A-36NLNGW1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VD	gg	AP6213A-36NLNPS1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2VD	gg	AP6213A-36NLNPW1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2VE	-	AP6213A-36UHFGS	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VE	-	AP6213A-36UHFGW	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VE	-	AP6213A-36UHFPS	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2VE	-	AP6213A-36UHFPW	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2VE	gg	AP6213A-36UHFGS1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VE	gg	AP6213A-36UHFGW1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VE	gg	AP6213A-36UHFPS1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2VE	gg	AP6213A-36UHFPW1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2VF	-	AP6213A-36ULFGS	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VF	-	AP6213A-36ULFGW	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VF	-	AP6213A-36ULFPS	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2VF	-	AP6213A-36ULFPW	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2VF	gg	AP6213A-36ULFGS1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VF	gg	AP6213A-36ULFGW1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VF	gg	AP6213A-36ULFPS1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2VF	gg	AP6213A-36ULFPW1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2VG	-	AP6213A-36UHNGS	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VG	-	AP6213A-36UHNGW	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VG	-	AP6213A-36UHNPS	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2VG	-	AP6213A-36UHNPW	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2VG	gg	AP6213A-36UHNGS1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VG	gg	AP6213A-36UHNGW1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VG	gg	AP6213A-36UHNPS1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2VG	gg	AP6213A-36UHNPW1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2VH	-	AP6213A-36ULNGS	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VH	-	AP6213A-36ULNGW	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VH	-	AP6213A-36ULNPS	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2VH	-	AP6213A-36ULNPW	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2VH	gg	AP6213A-36ULNGS1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VH	gg	AP6213A-36ULNGW1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VH	gg	AP6213A-36ULNPS1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2VH	gg	AP6213A-36ULNPW1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2VJ	-	AP6213A-36DHFGS	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VJ	-	AP6213A-36DHFGW	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VJ	-	AP6213A-36DHFPS	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2VJ	-	AP6213A-36DHFPW	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2VJ	gg	AP6213A-36DHFGS1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VJ	gg	AP6213A-36DHFGW1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VJ	gg	AP6213A-36DHFPS1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2VJ	gg	AP6213A-36DHFPW1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2VK	-	AP6213A-36DLFGS	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VK	-	AP6213A-36DLFGW	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VK	-	AP6213A-36DLFPS	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2VK	-	AP6213A-36DLFPW	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2VK	gg	AP6213A-36DLFGS1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VK	gg	AP6213A-36DLFGW1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VK	gg	AP6213A-36DLFPS1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2VK	gg	AP6213A-36DLFPW1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2VL	-	AP6213A-36DHNGS	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VL	-	AP6213A-36DHNGW	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VL	-	AP6213A-36DHNPS	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2VL	-	AP6213A-36DHNPW	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2VL	gg	AP6213A-36DHNGS1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VL	gg	AP6213A-36DHNGW1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VL	gg	AP6213A-36DHNPS1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2VL	gg	AP6213A-36DHNPW1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2VM	-	AP6213A-36DLNGS	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VM	-	AP6213A-36DLNGW	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VM	-	AP6213A-36DLNPS	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2VM	-	AP6213A-36DLNPW	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2VM	gg	AP6213A-36DLNGS1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2VM	gg	AP6213A-36DLNGW1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2VM	gg	AP6213A-36DLNPS1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2VM	gg	AP6213A-36DLNPW1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2W	-	RQ5RW29CA	LVR-IC	LDO, 2.9V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
2W	-	UMZ36K	Z-diode	Dual, 35.07..36.87V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
2X	-	XC6127N49CNR	Vdet-IC	4.9V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2X	-	XC6221C35BNR	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2Y	-	XC6127N51CNR	Vdet-IC	5.1V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2Y	-	XC6221C36BNR	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2Z	-	XC6127N53CNR	Vdet-IC	5.3V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
2Z	-	XC6221C37BNR	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
2ZA	-	AP6213A-50NHFGS	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZA	-	AP6213A-50NHFGW	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZA	-	AP6213A-50NHFPS	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2ZA	-	AP6213A-50NHFPW	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2ZA	gg	AP6213A-50NHFGS1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZA	gg	AP6213A-50NHFGW1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZA	gg	AP6213A-50NHFPS1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2ZA	gg	AP6213A-50NHFPW1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2ZB	-	AP6213A-50NLFGS	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZB	-	AP6213A-50NLFGW	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZB	-	AP6213A-50NLFPS	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2ZB	-	AP6213A-50NLFPW	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2ZB	gg	AP6213A-50NLFGS1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZB	gg	AP6213A-50NLFGW1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZB	gg	AP6213A-50NLFPS1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2ZB	gg	AP6213A-50NLFPW1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, CL fast	SC-82	26vn	VR4	5gb	Anw
2ZC	-	AP6213A-50NHNGS	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZC	-	AP6213A-50NHNGW	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZC	-	AP6213A-50NHNPS	LVR-IC	LDO, 5.0V±2%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2ZC	-	AP6213A-50NHNPW	LVR-IC	LDO, 5.0V±2%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2ZC	gg	AP6213A-50NHNGS1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZC	gg	AP6213A-50NHNGW1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZC	gg	AP6213A-50NHNPS1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE	SC-82SA	23vn	VR4	5gb	Anw
2ZC	gg	AP6213A-50NHNPW1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE	SC-82	26vn	VR4	5gb	Anw
2ZD	-	AP6213A-50NLNGS	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZD	-	AP6213A-50NLNGW	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZD	-	AP6213A-50NLNPS	LVR-IC	LDO, 5.0V±2%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2ZD	-	AP6213A-50NLNPW	LVR-IC	LDO, 5.0V±2%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2ZD	gg	AP6213A-50NLNGS1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZD	gg	AP6213A-50NLNGW1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZD	gg	AP6213A-50NLNPS1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE	SC-82SA	23vn	VR4	5gb	Anw
2ZD	gg	AP6213A-50NLNPW1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE	SC-82	26vn	VR4	5gb	Anw
2ZE	-	AP6213A-50UHFGS	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZE	-	AP6213A-50UHFGW	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZE	-	AP6213A-50UHFPS	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2ZE	-	AP6213A-50UHFPW	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2ZE	gg	AP6213A-50UHFGS1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZE	gg	AP6213A-50UHFGW1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZE	gg	AP6213A-50UHFPS1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2ZE	gg	AP6213A-50UHFPW1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2ZF	-	AP6213A-50ULFGS	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZF	-	AP6213A-50ULFGW	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZF	-	AP6213A-50ULFPS	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2ZF	-	AP6213A-50ULFPW	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2ZF	gg	AP6213A-50ULFGS1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZF	gg	AP6213A-50ULFGW1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZF	gg	AP6213A-50ULFPS1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2ZF	gg	AP6213A-50ULFPW1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR, CL fast	SC-82	26vn	VR4	5gb	Anw
2ZG	-	AP6213A-50UHNGS	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZG	-	AP6213A-50UHNGW	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZG	-	AP6213A-50UHNPS	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2ZG	-	AP6213A-50UHNPW	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2ZG	gg	AP6213A-50UHNGS1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZG	gg	AP6213A-50UHNGW1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZG	gg	AP6213A-50UHNPS1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2ZG	gg	AP6213A-50UHNPW1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR	SC-82	26vn	VR4	5gb	Anw
2ZH	-	AP6213A-50ULNGS	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZH	-	AP6213A-50ULNGW	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZH	-	AP6213A-50ULNPS	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2ZH	-	AP6213A-50ULNPW	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2ZH	gg	AP6213A-50ULNGS1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZH	gg	AP6213A-50ULNGW1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZH	gg	AP6213A-50ULNPS1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR	SC-82SA	23vn	VR4	5gb	Anw
2ZH	gg	AP6213A-50ULNPW1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR	SC-82	26vn	VR4	5gb	Anw
2ZJ	-	AP6213A-50DHFGS	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZJ	-	AP6213A-50DHFGW	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZJ	-	AP6213A-50DHFPS	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2ZJ	-	AP6213A-50DHFPW	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2ZJ	gg	AP6213A-50DHFGS1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZJ	gg	AP6213A-50DHFGW1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZJ	gg	AP6213A-50DHFPS1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2ZJ	gg	AP6213A-50DHFPW1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2ZK	-	AP6213A-50DLFGS	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZK	-	AP6213A-50DLFGW	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZK	-	AP6213A-50DLFPS	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2ZK	-	AP6213A-50DLFPW	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2ZK	gg	AP6213A-50DLFGS1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZK	gg	AP6213A-50DLFGW1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZK	gg	AP6213A-50DLFPS1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR, CL fast	SC-82SA	23vn	VR4	5gb	Anw
2ZK	gg	AP6213A-50DLFPW1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR, CL fast	SC-82	26vn	VR4	5gb	Anw
2ZL	-	AP6213A-50DHNGS	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZL	-	AP6213A-50DHNGW	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZL	-	AP6213A-50DHNPS	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2ZL	-	AP6213A-50DHNPW	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2ZL	gg	AP6213A-50DHNGS1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZL	gg	AP6213A-50DHNGW1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZL	gg	AP6213A-50DHNPS1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2ZL	gg	AP6213A-50DHNPW1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR	SC-82	26vn	VR4	5gb	Anw
2ZM	-	AP6213A-50DLNGS	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZM	-	AP6213A-50DLNGW	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZM	-	AP6213A-50DLNPS	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2ZM	-	AP6213A-50DLNPW	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
2ZM	gg	AP6213A-50DLNGS1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR, Halogen-free	SC-82SA	23vn	VR4	5ga	Anw
2ZM	gg	AP6213A-50DLNGW1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR, Halogen-free	SC-82	26vn	VR4	5ga	Anw
2ZM	gg	AP6213A-50DLNPS1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR	SC-82SA	23vn	VR4	5gb	Anw
2ZM	gg	AP6213A-50DLNPW1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR	SC-82	26vn	VR4	5gb	Anw
3	gc	ELM7518NCB	Vdet-IC	1.8V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
3	gd	ELM7518CCB	Vdet-IC	1.8V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
30	-	R3111Q301B	Vdet-IC	3V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
30	-	XC6127N55DNR	Vdet-IC	5.5V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
30	-	XC6213B302NR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
30	-	XC6221C38BNR	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
30	-	XC6225A412NR-G	LVR-IC	LDO, 4.1V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
305	-	AT-30511	Si-npn	UHF, 11V, 8mA, 100mW, B=70..300, 10GHz	SOT-143	24t1	-	5c	Agi
305	-	LN3526N3012M	Vdet-IC	3.0V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
306	-	LN3526N3042M	Vdet-IC	3.0V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
307	-	LN3526N3052M	Vdet-IC	3.0V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
30A	-	AAT60030A-S15	Vdet-IC	3.0V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
30B	-	AAT60030B-S15	Vdet-IC	3.0V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
30C	-	AAT60030C-S15	Vdet-IC	3.0V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
30D	-	AAT60030D-S15	Vdet-IC	3.0V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
31	-	R3111Q311B	Vdet-IC	3.1V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
31	-	XC6213B312NR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
31	-	XC6221C39BNR	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
31	-	XC6225A41ANR-G	LVR-IC	LDO, 4.15V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
310	-	AT-31011	Si-npn	UHF, 11V, 16mA, 150mW, B=70..300, 10GHz	SOT-143	24t1	-	5c	Agi
315	-	LN3526N3112M	Vdet-IC	3.1V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
316	-	LN3526N3142M	Vdet-IC	3.1V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
317	-	LN3526N3152M	Vdet-IC	3.1V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
31A	-	AAT60031A-S15	Vdet-IC	3.1V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
31B	-	AAT60031B-S15	Vdet-IC	3.1V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
31C	-	AAT60031C-S15	Vdet-IC	3.1V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
31D	-	AAT60031D-S15	Vdet-IC	3.1V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
32	-	R3111Q321B	Vdet-IC	3.2V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
32	-	XC6213B322NR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
32	-	XC6221C40BNR	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
32	-	XC6225A422NR-G	LVR-IC	LDO, 4.2V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
320	-	AT-32011	Si-npn	UHF, 11V, 32mA, 0.2W, B=70..300, 10GHz	SOT-143	24tc	-	5c	Agi
325	-	LN3526N3212M	Vdet-IC	3.2V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
326	-	LN3526N3242M	Vdet-IC	3.2V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
327	-	LN3526N3252M	Vdet-IC	3.2V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
32A	-	AAT60032A-S15	Vdet-IC	3.2V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
32B	-	AAT60032B-S15	Vdet-IC	3.2V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
32C	-	AAT60032C-S15	Vdet-IC	3.2V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
32D	-	AAT60032D-S15	Vdet-IC	3.2V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
33	-	R3111Q331B	Vdet-IC	3.3V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
33	-	XC6213B332NR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
33	-	XC6221C41BNR	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
33	-	XC6225A42ANR-G	LVR-IC	LDO, 4.25V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
335	-	LN3526N3312M	Vdet-IC	3.3V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
336	-	LN3526N3342M	Vdet-IC	3.3V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
337	-	LN3526N3352M	Vdet-IC	3.3V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
33A	-	AAT60033A-S15	Vdet-IC	3.3V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
33B	-	AAT60033B-S15	Vdet-IC	3.3V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
33C	-	AAT60033C-S15	Vdet-IC	3.3V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
33D	-	AAT60033D-S15	Vdet-IC	3.3V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
34	-	R3111Q341B	Vdet-IC	3.4V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
34	-	XC6213B342NR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
34	-	XC6221C42BNR	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
34	-	XC6225A432NR-G	LVR-IC	LDO, 4.3V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
345	-	LN3526N3412M	Vdet-IC	3.4V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
346	-	LN3526N3442M	Vdet-IC	3.4V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
347	-	LN3526N3452M	Vdet-IC	3.4V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
34A	-	AAT60034A-S15	Vdet-IC	3.4V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
34B	-	AAT60034B-S15	Vdet-IC	3.4V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
34C	-	AAT60034C-S15	Vdet-IC	3.4V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
34D	-	AAT60034D-S15	Vdet-IC	3.4V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
35	-	R3111Q351B	Vdet-IC	3.5V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
35	-	XC6213B352NR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
35	-	XC6221C43BNR	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
35	-	XC6225A43ANR-G	LVR-IC	LDO, 4.35V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
355	-	LN3526N3512M	Vdet-IC	3.5V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
356	-	LN3526N3542M	Vdet-IC	3.5V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
357	-	LN3526N3552M	Vdet-IC	3.5V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
35A	-	AAT60035A-S15	Vdet-IC	3.5V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
35B	-	AAT60035B-S15	Vdet-IC	3.5V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
35C	-	AAT60035C-S15	Vdet-IC	3.5V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
35D	-	AAT60035D-S15	Vdet-IC	3.5V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
36	-	R3111Q361B	Vdet-IC	3.6V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
36	-	XC6213B362NR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
36	-	XC6221C44BNR	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
36	-	XC6225A442NR-G	LVR-IC	LDO, 4.4V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
365	-	LN3526N3612M	Vdet-IC	3.6V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
366	-	LN3526N3642M	Vdet-IC	3.6V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
367	-	LN3526N3652M	Vdet-IC	3.6V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
36A	-	AAT60036A-S15	Vdet-IC	3.6V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
36B	-	AAT60036B-S15	Vdet-IC	3.6V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
36C	-	AAT60036C-S15	Vdet-IC	3.6V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
36D	-	AAT60036D-S15	Vdet-IC	3.6V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
37	-	R3111Q371B	Vdet-IC	3.7V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
37	-	XC6213B372NR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
37	-	XC6217D082NR	LVR-IC	LDO, 0.8V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
37	-	XC6221C45BNR	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
375	-	LN3526N3712M	Vdet-IC	3.7V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
376	-	LN3526N3742M	Vdet-IC	3.7V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
377	-	LN3526N3752M	Vdet-IC	3.7V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
37A	-	AAT60037A-S15	Vdet-IC	3.7V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
37B	-	AAT60037B-S15	Vdet-IC	3.7V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
37C	-	AAT60037C-S15	Vdet-IC	3.7V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
37D	-	AAT60037D-S15	Vdet-IC	3.7V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
38	-	AP8822N-08GI	Vdet-IC	0.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
38	-	AP8822N-08GS	Vdet-IC	0.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
38	-	AP8822N-08PI	Vdet-IC	0.8V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
38	-	AP8822N-08PS	Vdet-IC	0.8V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
38	-	R3111Q381B	Vdet-IC	3.8V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
38	-	XC6213B382NR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
38	-	XC6217D092NR	LVR-IC	LDO, 0.9V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
38	-	XC6221C46BNR	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
385	-	LN3526N3812M	Vdet-IC	3.8V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
386	-	LN3526N3842M	Vdet-IC	3.8V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
387	-	LN3526N3852M	Vdet-IC	3.8V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
38A	-	AAT60038A-S15	Vdet-IC	3.8V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
38B	-	AAT60038B-S15	Vdet-IC	3.8V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
38C	-	AAT60038C-S15	Vdet-IC	3.8V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
38D	-	AAT60038D-S15	Vdet-IC	3.8V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
39	-	AP8822N-09GI	Vdet-IC	0.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
39	-	AP8822N-09GS	Vdet-IC	0.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
39	-	AP8822N-09PI	Vdet-IC	0.9V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
39	-	AP8822N-09PS	Vdet-IC	0.9V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
39	-	R3111Q391B	Vdet-IC	3.9V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
39	-	XC6213B392NR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
39	-	XC6217D102NR	LVR-IC	LDO, 1.0V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
39	-	XC6221C47BNR	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
395	-	LN3526N3912M	Vdet-IC	3.9V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
396	-	LN3526N3942M	Vdet-IC	3.9V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
397	-	LN3526N3952M	Vdet-IC	3.9V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
39A	-	AAT60039A-S15	Vdet-IC	3.9V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
39B	-	AAT60039B-S15	Vdet-IC	3.9V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
39C	-	AAT60039C-S15	Vdet-IC	3.9V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
39D	-	AAT60039D-S15	Vdet-IC	3.9V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
3A	-	2SC5473	Si-npn	HF-osc, 9V, 30mA, 150mW, B=80..200, 12GHz	SOT-343	24tu	-	5b	Pan
3A	-	R3132Q40EA	Vdet-IC	4V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3A	-	RQ5RW30AA	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
3A	-	XC6127N15DNR	Vdet-IC	1.5V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3A	-	XC6213B30ANR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
3A	-	XC6217D112NR	LVR-IC	LDO, 1.1V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3A	-	XC6221C48BNR	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
3B	-	R3132Q41EA	Vdet-IC	4.1V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3B	-	RQ5RW31AA	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
3B	-	XC6127N17DNR	Vdet-IC	1.7V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3B	-	XC6213B31ANR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
3B	-	XC6217D122NR	LVR-IC	LDO, 1.2V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3B	-	XC6221C49BNR	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5m	Tor
3C	-	R3132Q42EA	Vdet-IC	4.2V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3C	-	RQ5RW32AA	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
3C	-	XC6127N19DNR	Vdet-IC	1.9V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3C	-	XC6213B32ANR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
3C	-	XC6217D132NR	LVR-IC	LDO, 1.3V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3CP	-	3SK184-P	n-MESFET	GaAs, Dual gate, UHF, 13V, 50mA, 200mW, Idss=8.5..17mA	SOT-143	26fm	-	5b	Pan
3CQ	-	3SK184-Q	n-MESFET	GaAs, Dual gate, UHF, 13V, 50mA, 200mW, Idss=15..21mA	SOT-143	26fm	-	5b	Pan
3CR	-	3SK184-R	n-MESFET	GaAs, Dual gate, UHF, 13V, 50mA, 200mW, Idss=19..30mA	SOT-143	26fm	-	5b	Pan
3CS	-	3SK184-S	n-MESFET	GaAs, Dual gate, UHF, 13V, 50mA, 200mW, Idss=25..35mA	SOT-143	26fm	-	5b	Pan
3D	-	R3132Q43EA	Vdet-IC	4.3V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3D	-	RQ5RW33AA	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
3D	-	XC6127N21DNR	Vdet-IC	2.1V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3D	-	XC6213B33ANR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
3D	-	XC6217D142NR	LVR-IC	LDO, 1.4V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3D	-	XC6223A301NR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
3DO	-	3SK143-O	n-MOSFET	Dual gate, UHF, LN, 15V, ±30mA, 200mW, Idss=0.2..1.5mA	SOT-143	26fm	-	5b	Pan
3DP	-	3SK143-P	n-MOSFET	Dual gate, UHF, LN, 15V, ±30mA, 200mW, Idss=0.5..4mA	SOT-143	26fm	-	5b	Pan
3DQ	-	3SK143-Q	n-MOSFET	Dual gate, UHF, LN, 15V, ±30mA, 200mW, Idss=3..13mA	SOT-143	26fm	-	5b	Pan
3E	-	R3132Q44EA	Vdet-IC	4.4V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3E	-	RQ5RW34AA	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
3E	-	XC6127N23DNR	Vdet-IC	2.3V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3E	-	XC6213B34ANR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
3E	-	XC6217D152NR	LVR-IC	LDO, 1.5V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3E	-	XC6223A311NR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
3EQ	-	3SK144-Q	n-MOSFET	Dual gate, VHF, LN, 15V, ±30mA, 200mW, Idss=0.8..7mA	SOT-143	26fm	-	5b	Pan
3ER	-	3SK144-R	n-MOSFET	Dual gate, VHF, LN, 15V, ±30mA, 150mW, Idss=4..15mA	SOT-143	26fm	-	5b	Pan
3F	-	R3132Q45EA	Vdet-IC	4.5V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3F	-	RQ5RW35AA	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
3F	-	XC6127N25DNR	Vdet-IC	2.5V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3F	-	XC6213B35ANR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
3F	-	XC6217D162NR	LVR-IC	LDO, 1.6V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3F	-	XC6223A321NR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
3G	-	R3132Q46EA	Vdet-IC	4.6V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3G	-	RQ5RW36AA	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
3H	-	R3132Q47EA	Vdet-IC	4.7V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3H	-	RQ5RW37AA	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
3H	-	XC6127N27DNR	Vdet-IC	2.7V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3H	-	XC6213B36ANR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
3H	-	XC6217D172NR	LVR-IC	LDO, 1.7V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3H	-	XC6223A331NR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
3J	-	BCV62A	Si-pnp	Dual, 30V, 100mA, 250mW, B=125..250, >100MHz	SOT-143	24t5	-	5h	Inf
3J	-	IMP161JEUS	Vdet-IC	4.0V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
3J	-	R3132Q48EA	Vdet-IC	4.8V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3J	-	RQ5RW38AA	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
3Jp	-	BCV62A	Si-pnp	Dual, 30V, 100mA, 250mW, B=125..250, >100MHz	SOT-143	24t5	-	5c	Phi



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3Js	-	BCV62A	Si-pnp	Dual, 30V, 100mA, 300mW, B=125..220, =250MHz	SOT-143	24t5	-	5b	Sie
3K	-	R3132Q49EA	Vdet-IC	4.9V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3K	-	RQ5RW39AA	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
3K	-	XC6127N29DNR	Vdet-IC	2.9V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3K	-	XC6213B37ANR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
3K	-	XC6217D182NR	LVR-IC	LDO, 1.8V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3K	-	XC6223A341NR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
3Kp	-	BCV62B	Si-pnp	Dual, 30V, 100mA, 250mW, B=220..475, >100MHz	SOT-143	24t5	-	5c	Phi
3Ks	-	BCV62B	Si-pnp	Dual, 30V, 100mA, 300mW, B=220..475, =250MHz	SOT-143	24t5	-	5b	Sie
3L	-	IMP161LEUS	Vdet-IC	4.63V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
3L	-	R3133Q40EA	Vdet-IC	4V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3L	-	RQ5RW30CA	LVR-IC	LDO, 3.0V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
3L	-	XC6127N31DNR	Vdet-IC	3.1V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3L	-	XC6213B38ANR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
3L	-	XC6217D192NR	LVR-IC	LDO, 1.9V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3L	-	XC6223A351NR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
3Lp	-	BCV62C	Si-pnp	Dual, 30V, 100mA, 250mW, B=420..800, >100MHz	SOT-143	24t5	-	5c	Phi
3Ls	-	BCV62C	Si-pnp	Dual, 30V, 100mA, 300mW, B=420..800, =250MHz	SOT-143	24t5	-	5b	Sie
3M	-	IMP161MEUS	Vdet-IC	4.38V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
3M	-	R3133Q41EA	Vdet-IC	4.1V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3M	-	RQ5RW31CA	LVR-IC	LDO, 3.1V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
3M	-	XC6127N33DNR	Vdet-IC	3.3V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3M	-	XC6213B39ANR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
3M	-	XC6217D202NR	LVR-IC	LDO, 2.0V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3M	-	XC6223A361NR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
3M1	-	S-19100C38A-N4T2U	Vdet-IC	3.8V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3M2	-	S-19100C39A-N4T2U	Vdet-IC	3.9V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3M3	-	S-19100C40A-N4T2U	Vdet-IC	4.0V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3M4	-	S-19100C41A-N4T2U	Vdet-IC	4.1V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3M5	-	S-19100C42A-N4T2U	Vdet-IC	4.2V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3M6	-	S-19100C43A-N4T2U	Vdet-IC	4.3V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3M7	-	S-19100C44A-N4T2U	Vdet-IC	4.4V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3M8	-	S-19100C45A-N4T2U	Vdet-IC	4.5V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3M9	-	S-19100C46A-N4T2U	Vdet-IC	4.6V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MA	-	S-19100C12A-N4T2U	Vdet-IC	1.2V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MB	-	S-19100C13A-N4T2U	Vdet-IC	1.3V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MC	-	S-19100C14A-N4T2U	Vdet-IC	1.4V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MD	-	S-19100C15A-N4T2U	Vdet-IC	1.5V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3ME	-	S-19100C16A-N4T2U	Vdet-IC	1.6V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MF	-	S-19100C17A-N4T2U	Vdet-IC	1.7V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MG	-	S-19100C18A-N4T2U	Vdet-IC	1.8V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MH	-	S-19100C19A-N4T2U	Vdet-IC	1.9V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MI	-	S-19100C20A-N4T2U	Vdet-IC	2.0V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MJ	-	S-19100C21A-N4T2U	Vdet-IC	2.1V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MK	-	S-19100C22A-N4T2U	Vdet-IC	2.2V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3ML	-	S-19100C23A-N4T2U	Vdet-IC	2.3V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MM	-	S-19100C24A-N4T2U	Vdet-IC	2.4V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MN	-	S-19100C25A-N4T2U	Vdet-IC	2.5V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MO	-	S-19100C26A-N4T2U	Vdet-IC	2.6V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3Mp	-	BCV62	Si-pnp	Dual, 30V, 100mA, 250mW, B=100..800, >100MHz	SOT-143	24t5	-	5c	Phi
3MP	-	S-19100C27A-N4T2U	Vdet-IC	2.7V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MQ	-	S-19100C28A-N4T2U	Vdet-IC	2.8V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MR	-	S-19100C29A-N4T2U	Vdet-IC	2.9V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MS	-	S-19100C30A-N4T2U	Vdet-IC	3.0V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MT	-	S-19100C31A-N4T2U	Vdet-IC	3.1V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MU	-	S-19100C32A-N4T2U	Vdet-IC	3.2V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MV	-	S-19100C33A-N4T2U	Vdet-IC	3.3V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MW	-	S-19100C34A-N4T2U	Vdet-IC	3.4V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MX	-	S-19100C35A-N4T2U	Vdet-IC	3.5V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MY	-	S-19100C36A-N4T2U	Vdet-IC	3.6V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3MZ	-	S-191003C7A-N4T2U	Vdet-IC	3.7V±3%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3N	-	R3133Q42EA	Vdet-IC	4.2V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3N	-	RQ5RW32CA	LVR-IC	LDO, 3.2V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
3N	-	XC6127N35DNR	Vdet-IC	3.5V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3N	-	XC6217D212NR	LVR-IC	LDO, 2.1V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3N1	-	S-19100N38A-N4T2U	Vdet-IC	3.8V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3N2	-	S-19100N39A-N4T2U	Vdet-IC	3.9V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3N3	-	S-19100N40A-N4T2U	Vdet-IC	4.0V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3N4	-	S-19100N41A-N4T2U	Vdet-IC	4.1V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3N5	-	S-19100N42A-N4T2U	Vdet-IC	4.2V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3N6	-	S-19100N43A-N4T2U	Vdet-IC	4.3V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3N7	-	S-19100N44A-N4T2U	Vdet-IC	4.4V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3N8	-	S-19100N45A-N4T2U	Vdet-IC	4.5V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3N9	-	S-19100N46A-N4T2U	Vdet-IC	4.6V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NA	-	S-19100N12A-N4T2U	Vdet-IC	1.2V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NB	-	S-19100N13A-N4T2U	Vdet-IC	1.3V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NC	-	S-19100N14A-N4T2U	Vdet-IC	1.4V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3ND	-	S-19100N15A-N4T2U	Vdet-IC	1.5V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NE	-	S-19100N16A-N4T2U	Vdet-IC	1.6V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NF	-	S-19100N17A-N4T2U	Vdet-IC	1.7V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NG	-	S-19100N18A-N4T2U	Vdet-IC	1.8V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NH	-	S-19100N19A-N4T2U	Vdet-IC	1.9V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NI	-	S-19100N20A-N4T2U	Vdet-IC	2.0V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NJ	-	S-19100N21A-N4T2U	Vdet-IC	2.1V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NK	-	S-19100N22A-N4T2U	Vdet-IC	2.2V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NL	-	S-19100N23A-N4T2U	Vdet-IC	2.3V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NM	-	S-19100N24A-N4T2U	Vdet-IC	2.4V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NN	-	S-19100N25A-N4T2U	Vdet-IC	2.5V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NO	-	S-19100N26A-N4T2U	Vdet-IC	2.6V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NP	-	S-19100N27A-N4T2U	Vdet-IC	2.7V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NQ	-	S-19100N28A-N4T2U	Vdet-IC	2.8V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NR	-	S-19100N29A-N4T2U	Vdet-IC	2.9V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NS	-	S-19100N30A-N4T2U	Vdet-IC	3.0V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NT	-	S-19100N31A-N4T2U	Vdet-IC	3.1V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NU	-	S-19100N32A-N4T2U	Vdet-IC	3.2V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NV	-	S-19100N33A-N4T2U	Vdet-IC	3.3V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NW	-	S-19100N34A-N4T2U	Vdet-IC	3.4V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NX	-	S-19100N35A-N4T2U	Vdet-IC	3.5V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NY	-	S-19100N36A-N4T2U	Vdet-IC	3.6V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3NZ	-	S-19100N37A-N4T2U	Vdet-IC	3.7V±3%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3O1	-	S-19100C38H-N4T2U	Vdet-IC	3.8V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3O2	-	S-19100C39H-N4T2U	Vdet-IC	3.9V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3O3	-	S-19100C40H-N4T2U	Vdet-IC	4.0V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3O4	-	S-19100C41H-N4T2U	Vdet-IC	4.1V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3O5	-	S-19100C42H-N4T2U	Vdet-IC	4.2V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3O6	-	S-19100C43H-N4T2U	Vdet-IC	4.3V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3O7	-	S-19100C44H-N4T2U	Vdet-IC	4.4V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3O8	-	S-19100C45H-N4T2U	Vdet-IC	4.5V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3O9	-	S-19100C46H-N4T2U	Vdet-IC	4.6V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OA	-	S-19100C12H-N4T2U	Vdet-IC	1.2V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OB	-	S-19100C13H-N4T2U	Vdet-IC	1.3V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OC	-	S-19100C14H-N4T2U	Vdet-IC	1.4V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OD	-	S-19100C15H-N4T2U	Vdet-IC	1.5V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OE	-	S-19100C16H-N4T2U	Vdet-IC	1.6V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OF	-	S-19100C17H-N4T2U	Vdet-IC	1.7V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OG	-	S-19100C18H-N4T2U	Vdet-IC	1.8V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OH	-	S-19100C19H-N4T2U	Vdet-IC	1.9V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OI	-	S-19100C20H-N4T2U	Vdet-IC	2.0V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OJ	-	S-19100C21H-N4T2U	Vdet-IC	2.1V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OK	-	S-19100C22H-N4T2U	Vdet-IC	2.2V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OL	-	S-19100C23H-N4T2U	Vdet-IC	2.3V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OM	-	S-19100C24H-N4T2U	Vdet-IC	2.4V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3ON	-	S-19100C25H-N4T2U	Vdet-IC	2.5V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OO	-	S-19100C26H-N4T2U	Vdet-IC	2.6V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OP	-	S-19100C27H-N4T2U	Vdet-IC	2.7V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OQ	-	S-19100C28H-N4T2U	Vdet-IC	2.8V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OR	-	S-19100C29H-N4T2U	Vdet-IC	2.9V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OS	-	S-19100C30H-N4T2U	Vdet-IC	3.0V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OT	-	S-19100C31H-N4T2U	Vdet-IC	3.1V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OU	-	S-19100C32H-N4T2U	Vdet-IC	3.2V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OV	-	S-19100C33H-N4T2U	Vdet-IC	3.3V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OW	-	S-19100C34H-N4T2U	Vdet-IC	3.4V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OX	-	S-19100C35H-N4T2U	Vdet-IC	3.5V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OY	-	S-19100C36H-N4T2U	Vdet-IC	3.6V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3OZ	-	S-19100C37H-N4T2U	Vdet-IC	3.7V±2.5%, -Reset PPO	SC-82AB	26vdf	VD3	5b	Sii
3P	-	R3133Q43EA	Vdet-IC	4.3V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3P	-	RQ5RW33CA	LVR-IC	LDO, 3.3V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
3P	-	XC6127N37DNR	Vdet-IC	3.7V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3P	-	XC6217D222NR	LVR-IC	LDO, 2.2V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3P	-	XC6223A371NR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3P1	-	S-19100N38H-N4T2U	Vdet-IC	3.8V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3P2	-	S-19100N39H-N4T2U	Vdet-IC	3.9V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3P3	-	S-19100N40H-N4T2U	Vdet-IC	4.0V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3P4	-	S-19100N41H-N4T2U	Vdet-IC	4.1V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3P5	-	S-19100N42H-N4T2U	Vdet-IC	4.2V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3P6	-	S-19100N43H-N4T2U	Vdet-IC	4.3V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3P7	-	S-19100N44H-N4T2U	Vdet-IC	4.4V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3P8	-	S-19100N45H-N4T2U	Vdet-IC	4.5V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3P9	-	S-19100N46H-N4T2U	Vdet-IC	4.6V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PA	-	S-19100N12H-N4T2U	Vdet-IC	1.2V±2%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PB	-	S-19100N13H-N4T2U	Vdet-IC	1.3V±2%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PC	-	S-19100N14H-N4T2U	Vdet-IC	1.4V±2%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PD	-	S-19100N15H-N4T2U	Vdet-IC	1.5V±2%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PE	-	S-19100N16H-N4T2U	Vdet-IC	1.6V±2%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PF	-	S-19100N17H-N4T2U	Vdet-IC	1.7V±2%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PG	-	S-19100N18H-N4T2U	Vdet-IC	1.8V±2%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PH	-	S-19100N19H-N4T2U	Vdet-IC	1.9V±2%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PI	-	S-19100N20H-N4T2U	Vdet-IC	2.0V±2%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PJ	-	S-19100N21H-N4T2U	Vdet-IC	2.1V±2%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PK	-	S-19100N22H-N4T2U	Vdet-IC	2.2V±2%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PL	-	S-19100N23H-N4T2U	Vdet-IC	2.3V±2%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PM	-	S-19100N24H-N4T2U	Vdet-IC	2.4V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PN	-	S-19100N25H-N4T2U	Vdet-IC	2.5V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PO	-	S-19100N26H-N4T2U	Vdet-IC	2.6V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PP	-	S-19100N27H-N4T2U	Vdet-IC	2.7V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PQ	-	S-19100N28H-N4T2U	Vdet-IC	2.8V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PR	-	S-19100N29H-N4T2U	Vdet-IC	2.9V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PS	-	S-19100N30H-N4T2U	Vdet-IC	3.0V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PT	-	S-19100N31H-N4T2U	Vdet-IC	3.1V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PU	-	S-19100N32H-N4T2U	Vdet-IC	3.2V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PV	-	S-19100N33H-N4T2U	Vdet-IC	3.3V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PW	-	S-19100N34H-N4T2U	Vdet-IC	3.4V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PX	-	S-19100N35H-N4T2U	Vdet-IC	3.5V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PY	-	S-19100N36H-N4T2U	Vdet-IC	3.6V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3PZ	-	S-19100N37H-N4T2U	Vdet-IC	3.7V±2.5%, -Reset ODO	SC-82AB	26vdf	VD1	5b	Sii
3Q	-	R3133Q44EA	Vdet-IC	4.4V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3R	-	CH481KPT	Si-diode	Dual, Schottky barrier, 30V, 200mA, Vf<0.5V(200mA)	SOT-343	26dv	-	5b	Chm
3R	-	IMP161REUS	Vdet-IC	2.63V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
3R	-	R3133Q45EA	Vdet-IC	4.5V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3R	-	RQ5RW34CA	LVR-IC	LDO, 3.4V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
3R	-	XC6127N39DNR	Vdet-IC	3.9V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3R	-	XC6217D232NR	LVR-IC	LDO, 2.3V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3R	-	XC6223A381NR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
3S	-	CH480YPT	Si-diode	Dual, Schottky barrier, 30V, 100mA, Vf<0.53V(100mA)	SOT-543	59dv	-	5b	Chm
3S	-	IMP161SEUS	Vdet-IC	2.93V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
3S	-	R3133Q46EA	Vdet-IC	4.6V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3S	-	RQ5RW35CA	LVR-IC	LDO, 3.5V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
3S	-	XC6127N41DNR	Vdet-IC	4.1V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3S	-	XC6217D242NR	LVR-IC	LDO, 2.4V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3S	-	XC6223A391NR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
3T	-	CH480KPT	Si-diode	Dual, Schottky barrier, 45V, 100mA, Vf<0.6V(100mA)	SOT-343	26dv	-	5b	Chm
3T	-	IMP161TEUS	Vdet-IC	3.08V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
3T	-	R3133Q47EA	Vdet-IC	4.7V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3T	-	RQ5RW36CA	LVR-IC	LDO, 3.6V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
3T	-	XC6127N43DNR	Vdet-IC	4.3V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3T	-	XC6217D252NR	LVR-IC	LDO, 2.5V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3T	-	XC6223A401NR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
3U	-	CH481YPT	Si-diode	Dual, Schottky barrier, 30V, 100mA, Vf<0.43V(100mA)	SOT-543	59dv	-	5b	Chm
3U	-	R3133Q48EA	Vdet-IC	4.8V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3U	-	RQ5RW37CA	LVR-IC	LDO, 3.7V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
3U	-	XC6127N45DNR	Vdet-IC	4.5V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3U	-	XC6217D262NR	LVR-IC	LDO, 2.6V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3V	-	R3133Q49EA	Vdet-IC	4.9V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
3V	-	RQ5RW38CA	LVR-IC	LDO, 3.8V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
3V	-	UMZ5.6K	Z-diode	Dual, 5.49..5.73V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
3V	-	XC6127N47DNR	Vdet-IC	4.7V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3V	-	XC6217D272NR	LVR-IC	LDO, 2.7V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3W	-	CH483KPT	Si-diode	Dual, Schottky barrier, 30V, 200mA, Vf<0.5V(200mA)	SOT-343	24ce	-	5b	Chm
3W	-	RQ5RW39CA	LVR-IC	LDO, 3.9V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
3X	-	UMZ6.8K	Z-diode	Dual, 6.65..6.93V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3X	-	XC6127N49DNR	Vdet-IC	4.9V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3X	-	XC6217D282NR	LVR-IC	LDO, 2.8V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3Y	-	XC6127N51DNR	Vdet-IC	5.1V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3Y	-	XC6217D292NR	LVR-IC	LDO, 2.9V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
3Z	-	CH227PT	Si-diode	Dual, Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	SOT-343	26de	-	5b	Chm
3Z	-	UMZ10K	Z-diode	Dual, 9.77..10.21V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
3Z	-	XC6127N53DNR	Vdet-IC	5.3V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
3Z	-	XC6217D302NR	LVR-IC	LDO, 3.0V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
4	gc	ELM7519NCB	Vdet-IC	1.9V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
4	gd	ELM7519CCB	Vdet-IC	1.9V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
4.7W	-	MAZ3047W	Z-diode	Dual, 4.7V, If=100mA, Zzt=50Ω, 200mW	SOT-143	24ce	-	5b	Pan
40	-	AP8822N-10GI	Vdet-IC	1.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
40	-	AP8822N-10GS	Vdet-IC	1.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
40	-	AP8822N-10PI	Vdet-IC	1.0V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
40	-	AP8822N-10PS	Vdet-IC	1.0V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
40	-	R3111Q401B	Vdet-IC	4V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
40	-	XC6127N55ENR	Vdet-IC	5.5V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
40	-	XC6213B402NR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
40	-	XC6217D312NR	LVR-IC	LDO, 3.1V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
40	-	XC6221D081NR	LVR-IC	LDO, 0.8V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
40	-	XC6225B412NR-G	LVR-IC	LDO, 4.1V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
405	-	LN3526N4012M	Vdet-IC	4.0V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
406	-	LN3526N4042M	Vdet-IC	4.0V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
407	-	LN3526N4052M	Vdet-IC	4.0V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
40A	-	AAT60040A-S15	Vdet-IC	4.0V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
40B	-	AAT60040B-S15	Vdet-IC	4.0V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
40C	-	AAT60040C-S15	Vdet-IC	4.0V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
40D	-	AAT60040D-S15	Vdet-IC	4.0V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
41	-	AP8822N-11GI	Vdet-IC	1.1V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
41	-	AP8822N-11GS	Vdet-IC	1.1V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
41	-	AP8822N-11PI	Vdet-IC	1.1V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
41	-	AP8822N-11PS	Vdet-IC	1.1V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
41	-	R3111Q411B	Vdet-IC	4.1V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
41	-	XC6213B412NR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
41	-	XC6217D322NR	LVR-IC	LDO, 3.2V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
41	-	XC6221D091NR	LVR-IC	LDO, 0.9V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
41	-	XC6225B41ANR-G	LVR-IC	LDO, 4.15V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
414	-	AT-41411	Si-npn	UHF, 20V, 50mA, 225mW, B=30..270, 7GHz	SOT-143	24tc	-	5c	Agi
415	-	LN3526N4112M	Vdet-IC	4.1V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
416	-	LN3526N4142M	Vdet-IC	4.1V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
417	-	LN3526N4152M	Vdet-IC	4.1V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
41A	-	AAT60041A-S15	Vdet-IC	4.1V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
41B	-	AAT60041B-S15	Vdet-IC	4.1V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
41C	-	AAT60041C-S15	Vdet-IC	4.1V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
41D	-	AAT60041D-S15	Vdet-IC	4.1V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
42	-	AP8822N-12GI	Vdet-IC	1.2V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
42	-	AP8822N-12GS	Vdet-IC	1.2V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
42	-	AP8822N-12PI	Vdet-IC	1.2V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
42	-	AP8822N-12PS	Vdet-IC	1.2V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
42	-	R3111Q421B	Vdet-IC	4.2V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
42	-	XC6213B422NR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
42	-	XC6217D332NR	LVR-IC	LDO, 3.3V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
42	-	XC6221D101NR	LVR-IC	LDO, 1.0V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
42	-	XC6225B422NR-G	LVR-IC	LDO, 4.2V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
425	-	LN3526N4212M	Vdet-IC	4.2V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
426	-	LN3526N4242M	Vdet-IC	4.2V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
427	-	LN3526N4252M	Vdet-IC	4.2V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
42A	-	AAT60042A-S15	Vdet-IC	4.2V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
42B	-	AAT60042B-S15	Vdet-IC	4.2V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
42C	-	AAT60042C-S15	Vdet-IC	4.2V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
42D	-	AAT60042D-S15	Vdet-IC	4.2V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
43	-	AP8822N-13GI	Vdet-IC	1.3V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
43	-	AP8822N-13GS	Vdet-IC	1.3V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
43	-	AP8822N-13PI	Vdet-IC	1.3V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
43	-	AP8822N-13PS	Vdet-IC	1.3V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
43	-	R3111Q431B	Vdet-IC	4.3V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
43	-	XC6213B432NR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
43	-	XC6217D342NR	LVR-IC	LDO, 3.4V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
43	-	XC6221D111NR	LVR-IC	LDO, 1.1V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
43	-	XC6225B42ANR-G	LVR-IC	LDO, 4.25V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
435	-	LN3526N4312M	Vdet-IC	4.3V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
436	-	LN3526N4342M	Vdet-IC	4.3V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
437	-	LN3526N4352M	Vdet-IC	4.3V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
43A	-	AAT60043A-S15	Vdet-IC	4.3V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
43B	-	AAT60043B-S15	Vdet-IC	4.3V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
43C	-	AAT60043C-S15	Vdet-IC	4.3V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
43D	-	AAT60043D-S15	Vdet-IC	4.3V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
44	-	AP8822N-14GI	Vdet-IC	1.4V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
44	-	AP8822N-14GS	Vdet-IC	1.4V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
44	-	AP8822N-14PI	Vdet-IC	1.4V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
44	-	AP8822N-14PS	Vdet-IC	1.4V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
44	-	R3111Q441B	Vdet-IC	4.4V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
44	-	XC6213B442NR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
44	-	XC6217D352NR	LVR-IC	LDO, 3.5V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
44	-	XC6221D121NR	LVR-IC	LDO, 1.2V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
44	-	XC6225B432NR-G	LVR-IC	LDO, 4.3V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
445	-	LN3526N4412M	Vdet-IC	4.4V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
446	-	LN3526N4442M	Vdet-IC	4.4V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
447	-	LN3526N4452M	Vdet-IC	4.4V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
44A	-	AAT60044A-S15	Vdet-IC	4.4V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
44B	-	AAT60044B-S15	Vdet-IC	4.4V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
44C	-	AAT60044C-S15	Vdet-IC	4.4V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
44D	-	AAT60044D-S15	Vdet-IC	4.4V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
45	-	AP8822N-15GI	Vdet-IC	1.5V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
45	-	AP8822N-15GS	Vdet-IC	1.5V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
45	-	AP8822N-15PI	Vdet-IC	1.5V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
45	-	AP8822N-15PS	Vdet-IC	1.5V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
45	-	R3111Q451B	Vdet-IC	4.5V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
45	-	XC6213B452NR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
45	-	XC6217D362NR	LVR-IC	LDO, 3.6V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
45	-	XC6221D131NR	LVR-IC	LDO, 1.3V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
45	-	XC6225B43ANR-G	LVR-IC	LDO, 4.35V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
455	-	LN3526N4512M	Vdet-IC	4.5V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
456	-	LN3526N4542M	Vdet-IC	4.5V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
457	-	LN3526N4552M	Vdet-IC	4.5V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
45A	-	AAT60045A-S15	Vdet-IC	4.5V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
45B	-	AAT60045B-S15	Vdet-IC	4.5V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
45C	-	AAT60045C-S15	Vdet-IC	4.5V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
45D	-	AAT60045D-S15	Vdet-IC	4.5V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
46	-	AP8822N-16GI	Vdet-IC	1.6V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
46	-	AP8822N-16GS	Vdet-IC	1.6V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
46	-	AP8822N-16PI	Vdet-IC	1.6V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
46	-	AP8822N-16PS	Vdet-IC	1.6V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
46	-	R3111Q461B	Vdet-IC	4.6V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
46	-	XC6213B462NR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
46	-	XC6217D372NR	LVR-IC	LDO, 3.7V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
46	-	XC6221D141NR	LVR-IC	LDO, 1.4V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
46	-	XC6225B442NR-G	LVR-IC	LDO, 4.4V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
465	-	LN3526N4612M	Vdet-IC	4.6V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
466	-	LN3526N4642M	Vdet-IC	4.6V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
467	-	LN3526N4652M	Vdet-IC	4.6V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
46A	-	AAT60046A-S15	Vdet-IC	4.6V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
46B	-	AAT60046B-S15	Vdet-IC	4.6V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
46C	-	AAT60046C-S15	Vdet-IC	4.6V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
46D	-	AAT60046D-S15	Vdet-IC	4.6V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
47	-	AP8822N-17GI	Vdet-IC	1.7V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
47	-	AP8822N-17GS	Vdet-IC	1.7V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
47	-	AP8822N-17PI	Vdet-IC	1.7V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
47	-	AP8822N-17PS	Vdet-IC	1.7V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
47	-	R3111Q471B	Vdet-IC	4.7V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
47	-	XC6213B472NR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
47	-	XC6217D382NR	LVR-IC	LDO, 3.8V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
47	-	XC6221D151NR	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
47-	-	BAS40-07	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-143	24ce	-	5c	NxH
475	-	LN3526N4712M	Vdet-IC	4.7V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
476	-	LN3526N4742M	Vdet-IC	4.7V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
477	-	LN3526N4752M	Vdet-IC	4.7V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
47A	-	AAT60047A-S15	Vdet-IC	4.7V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
47B	-	AAT60047B-S15	Vdet-IC	4.7V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
47C	-	AAT60047C-S15	Vdet-IC	4.7V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
47D	-	AAT60047D-S15	Vdet-IC	4.7V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
47p	-	BAS40-07	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-143	24ce	-	5c	NxH
47s	-	BAS40-07	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-143	24ce	-	5b	Inf
47s	-	BAS40-07W	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-343	24ce	-	5b	Inf
47t	-	BAS40-07	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-143	24ce	-	5c	NxM
47W	-	BAS40-07	Si-diode	Dual, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-143	24ce	-	5c	NxC
48	-	AP8822N-18GI	Vdet-IC	1.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
48	-	AP8822N-18GS	Vdet-IC	1.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
48	-	AP8822N-18PI	Vdet-IC	1.8V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
48	-	AP8822N-18PS	Vdet-IC	1.8V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
48	-	R3111Q481B	Vdet-IC	4.8V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
48	-	XC6213B482NR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
48	-	XC6217D392NR	LVR-IC	LDO, 3.9V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
48	-	XC6221D161NR	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
485	-	LN3526N4812M	Vdet-IC	4.8V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
486	-	LN3526N4842M	Vdet-IC	4.8V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
487	-	LN3526N4852M	Vdet-IC	4.8V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
48A	-	AAT60048A-S15	Vdet-IC	4.8V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
48B	-	AAT60048B-S15	Vdet-IC	4.8V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
48C	-	AAT60048C-S15	Vdet-IC	4.8V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
48D	-	AAT60048D-S15	Vdet-IC	4.8V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
49	-	AP8822N-19GI	Vdet-IC	1.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
49	-	AP8822N-19GS	Vdet-IC	1.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
49	-	AP8822N-19PI	Vdet-IC	1.9V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
49	-	AP8822N-19PS	Vdet-IC	1.9V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
49	-	R3111Q491B	Vdet-IC	4.9V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
49	-	XC6213B492NR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
49	-	XC6217D10ANR	LVR-IC	LDO, 1.05V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
49	-	XC6221D171NR	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
495	-	LN3526N4912M	Vdet-IC	4.9V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
496	-	LN3526N4942M	Vdet-IC	4.9V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
497	-	LN3526N4952M	Vdet-IC	4.9V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
49A	-	AAT60049A-S15	Vdet-IC	4.9V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
49B	-	AAT60049B-S15	Vdet-IC	4.9V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
49C	-	AAT60049C-S15	Vdet-IC	4.9V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
49D	-	AAT60049D-S15	Vdet-IC	4.9V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
49R	-	S849TR	MMIC	UHF, 16V, 30mA, 200mW, Idss=50..500µA	SOT-143R	26fm	A3	5c	Vs
4A	-	R3132Q50EA	Vdet-IC	5V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
4A	-	RQ5RW40AA	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
4A	-	XC6127N15ENR	Vdet-IC	1.5V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4A	-	XC6213B40ANR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
4A	-	XC6221D181NR	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4A0	-	LN1134A312CR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4A1	-	LN1134A322CR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4A2	-	LN1134A332CR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4A3	-	LN1134A342CR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4A4	-	LN1134A352CR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4A5	-	LN1134A362CR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4A6	-	LN1134A372CR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4A7	-	LN1134A382CR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4A8	-	LN1134A392CR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4A9	-	LN1134A402CR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AA	-	LN1134A412CR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AB	-	LN1134A422CR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AC	-	LN1134A432CR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AD	-	LN1134A442CR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AE	-	LN1134A452CR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AF	-	LN1134A462CR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AH	-	LN1134A472CR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AK	-	LN1134A482CR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AL	-	LN1134A492CR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AM	-	LN1134A502CR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AN	-	LN1134A512CR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AP	-	LN1134A522CR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AR	-	LN1134A532CR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AS	-	LN1134A542CR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AT	-	LN1134A552CR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AU	-	LN1134A562CR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AV	-	LN1134A572CR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AX	-	LN1134A582CR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4AY	-	LN1134A592CR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4AZ	-	LN1134A602CR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4B	-	RQ5RW41AA	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
4B	-	XC6127N17ENR	Vdet-IC	1.7V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4B	-	XC6213B41ANR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
4B	-	XC6221D191NR	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4B0	-	LN1134B312CR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4B1	-	LN1134B322CR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4B2	-	LN1134B332CR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4B3	-	LN1134B342CR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4B4	-	LN1134B352CR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4B5	-	LN1134B362CR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4B6	-	LN1134B372CR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4B7	-	LN1134B382CR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4B8	-	LN1134B392CR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4B9	-	LN1134B402CR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BA	-	LN1134B412CR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BB	-	LN1134B422CR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BC	-	LN1134B432CR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BD	-	LN1134B442CR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BE	-	LN1134B452CR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BF	-	LN1134B462CR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BH	-	LN1134B472CR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BK	-	LN1134B482CR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BL	-	LN1134B492CR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BM	-	LN1134B502CR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BN	-	LN1134B512CR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BP	-	LN1134B522CR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BR	-	LN1134B532CR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BS	-	LN1134B542CR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BT	-	LN1134B552CR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BU	-	LN1134B562CR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BV	-	LN1134B572CR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BX	-	LN1134B582CR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BY	-	LN1134B592CR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4BZ	-	LN1134B602CR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4C	-	3SK200	n-MOSFET	Dual gate, UHF, 15V, Idss>4mA	SOT-143	26fm	-	5c	Pan
4C	-	3SK269	n-MOSFET	Dual gate, UHF, LN, 15V, ±30mA, 150mW, Idss=4..20mA	SOT-343	26fm	-	5b	Pan
4C	-	RQ5RW42AA	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
4C	-	XC6127N19ENR	Vdet-IC	1.9V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4C	-	XC6213B42ANR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
4C	-	XC6221D201NR	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4C0	-	LN1134C312CR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4C1	-	LN1134C322CR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4C2	-	LN1134C332CR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4C3	-	LN1134C342CR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4C4	-	LN1134C352CR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4C5	-	LN1134C362CR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4C6	-	LN1134C372CR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4C7	-	LN1134C382CR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4C8	-	LN1134C392CR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4C9	-	LN1134C402CR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CA	-	LN1134C412CR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CB	-	LN1134C422CR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CC	-	LN1134C432CR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CD	-	LN1134C442CR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CE	-	LN1134C452CR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CF	-	LN1134C462CR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CH	-	LN1134C472CR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CK	-	LN1134C482CR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CL	-	LN1134C492CR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CM	-	LN1134C502CR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CN	-	LN1134C512CR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CP	-	LN1134C522CR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CR	-	LN1134C532CR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CS	-	LN1134C542CR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CT	-	LN1134C552CR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CU	-	LN1134C562CR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CV	-	LN1134C572CR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CX	-	LN1134C582CR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4CY	-	LN1134C592CR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4CZ	-	LN1134C602CR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4D	-	RQ5RW43AA	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
4D	-	XC6127N21ENR	Vdet-IC	2.1V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4D	-	XC6213B43ANR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
4D	-	XC6221D211NR	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4D0	-	LN1134D312CR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4D1	-	LN1134D322CR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4D2	-	LN1134D332CR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4D3	-	LN1134D342CR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4D4	-	LN1134D352CR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4D5	-	LN1134D362CR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4D6	-	LN1134D372CR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4D7	-	LN1134D382CR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4D8	-	LN1134D392CR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4D9	-	LN1134D402CR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DA	-	LN1134D412CR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DB	-	LN1134D422CR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DC	-	LN1134D432CR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DD	-	LN1134D442CR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DE	-	LN1134D452CR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DF	-	LN1134D462CR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DH	-	LN1134D472CR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DK	-	LN1134D482CR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DL	-	LN1134D492CR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DM	-	LN1134D502CR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DN	-	LN1134D512CR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DP	-	LN1134D522CR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DR	-	LN1134D532CR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DS	-	LN1134D542CR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DT	-	LN1134D552CR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DU	-	LN1134D562CR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DV	-	LN1134D572CR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DX	-	LN1134D582CR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DY	-	LN1134D592CR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4DZ	-	LN1134D602CR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4E	-	RQ5RW44AA	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
4E	-	XC6127N23ENR	Vdet-IC	2.3V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4E	-	XC6213B44ANR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
4E	-	XC6221D221NR	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4E9	-	LN1134A10ACR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4EA	-	LN1134A11ACR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4EB	-	LN1134A12ACR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4EC	-	LN1134A13ACR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4ED	-	LN1134A14ACR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4EE	-	LN1134A15ACR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4EF	-	LN1134A16ACR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4EH	-	LN1134A17ACR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4EK	-	LN1134A18ACR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4EL	-	LN1134A19ACR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4EM	-	LN1134A20ACR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4EN	-	LN1134A21ACR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4EP	-	LN1134A22ACR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4ER	-	LN1134A23ACR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4ES	-	LN1134A24ACR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4ET	-	LN1134A25ACR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4EU	-	LN1134A26ACR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4EV	-	LN1134A27ACR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4EX	-	LN1134A28ACR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4EY	-	LN1134A29ACR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4EZ	-	LN1134A30ACR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4F	-	RQ5RW45AA	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
4F	-	XC6127N25ENR	Vdet-IC	2.5V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4F	-	XC6213B45ANR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
4F	-	XC6221D231NR	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4F9	-	LN1134B10ACR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4FA	-	LN1134B11ACR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4FB	-	LN1134B12ACR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4FC	-	LN1134B13ACR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4FD	-	LN1134B14ACR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4FE	-	LN1134B15ACR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	NIn
4FF	-	LN1134B16ACR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	NIn
4FH	-	LN1134B17ACR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	NIn
4FK	-	LN1134B18ACR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	NIn
4FL	-	LN1134B19ACR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	NIn
4FM	-	LN1134B20ACR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	NIn
4FN	-	LN1134B21ACR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	NIn
4FP	-	LN1134B22ACR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	NIn
4FR	-	LN1134B23ACR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	NIn
4FS	-	LN1134B24ACR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	NIn
4FT	-	LN1134B25ACR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	NIn
4FU	-	LN1134B26ACR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	NIn
4FV	-	LN1134B27ACR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	NIn
4FX	-	LN1134B28ACR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	NIn
4FY	-	LN1134B29ACR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	NIn
4FZ	-	LN1134B30ACR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	NIn
4G	-	RQ5RW46AA	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
4H	-	RQ5RW47AA	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
4H	-	XC6127N27ENR	Vdet-IC	2.7V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4H	-	XC6213B46ANR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
4H	-	XC6221D241NR	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4H9	-	LN1134C10ACR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HA	-	LN1134C11ACR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HB	-	LN1134C12ACR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HC	-	LN1134C13ACR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HD	-	LN1134C14ACR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HE	-	LN1134C15ACR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HF	-	LN1134C16ACR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HH	-	LN1134C17ACR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HK	-	LN1134C18ACR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HL	-	LN1134C19ACR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HM	-	LN1134C20ACR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HN	-	LN1134C21ACR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HP	-	LN1134C22ACR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HR	-	LN1134C23ACR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HS	-	LN1134C24ACR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HT	-	LN1134C25ACR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HU	-	LN1134C26ACR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HV	-	LN1134C27ACR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HX	-	LN1134C28ACR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HY	-	LN1134C29ACR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4HZ	-	LN1134C30ACR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	NIn
4J	-	IMP162JEUS	Vdet-IC	4.0V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
4J	-	RQ5RW48AA	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
4K	-	RQ5RW49AA	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
4K	-	XC6127N29ENR	Vdet-IC	2.9V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4K	-	XC6213B47ANR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
4K	-	XC6221D251NR	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4K9	-	LN1134D10ACR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KA	-	LN1134D11ACR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KB	-	LN1134D12ACR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KC	-	LN1134D13ACR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KD	-	LN1134D14ACR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KE	-	LN1134D15ACR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KF	-	LN1134D16ACR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KH	-	LN1134D17ACR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KK	-	LN1134D18ACR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KL	-	LN1134D19ACR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KM	-	LN1134D20ACR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KN	-	LN1134D21ACR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KP	-	LN1134D22ACR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KR	-	LN1134D23ACR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KS	-	LN1134D24ACR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KT	-	LN1134D25ACR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KU	-	LN1134D26ACR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KV	-	LN1134D27ACR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KX	-	LN1134D28ACR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KY	-	LN1134D29ACR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4KZ	-	LN1134D30ACR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	NIn
4L	-	IMP162LEUS	Vdet-IC	4.63V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4L	-	R3133Q50EA	Vdet-IC	5V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
4L	-	RQ5RW40CA	LVR-IC	LDO, 4.0V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
4L	-	XC6127N31ENR	Vdet-IC	3.1V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4L	-	XC6213B48ANR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
4L	-	XC6221D261NR	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4L0	-	LN1134A31ACR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4L1	-	LN1134A32ACR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4L2	-	LN1134A33ACR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4L3	-	LN1134A34ACR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4L4	-	LN1134A35ACR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4L5	-	LN1134A36ACR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4L6	-	LN1134A37ACR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4L7	-	LN1134A38ACR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4L8	-	LN1134A39ACR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4L9	-	LN1134A40ACR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LA	-	LN1134A41ACR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LB	-	LN1134A42ACR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LC	-	LN1134A43ACR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LD	-	LN1134A44ACR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LE	-	LN1134A45ACR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LF	-	LN1134A46ACR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LH	-	LN1134A47ACR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LK	-	LN1134A48ACR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LL	-	LN1134A49ACR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LM	-	LN1134A50ACR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LN	-	LN1134A51ACR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LP	-	LN1134A52ACR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LR	-	LN1134A53ACR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LS	-	LN1134A54ACR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LT	-	LN1134A55ACR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LU	-	LN1134A56ACR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LV	-	LN1134A57ACR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LX	-	LN1134A58ACR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4LY	-	LN1134A59ACR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4M	-	IMP162MEUS	Vdet-IC	4.38V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
4M	-	RQ5RW41CA	LVR-IC	LDO, 4.1V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
4M	-	XC6127N33ENR	Vdet-IC	3.3V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4M	-	XC6213B49ANR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
4M	-	XC6221D271NR	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4M0	-	LN1134B31ACR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4M1	-	LN1134B32ACR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4M2	-	LN1134B33ACR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4M3	-	LN1134B34ACR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4M4	-	LN1134B35ACR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4M5	-	LN1134B36ACR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4M6	-	LN1134B37ACR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4M7	-	LN1134B38ACR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4M8	-	LN1134B39ACR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4M9	-	LN1134B40ACR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MA	-	LN1134B41ACR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MB	-	LN1134B42ACR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MC	-	LN1134B43ACR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MD	-	LN1134B44ACR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4ME	-	LN1134B45ACR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MF	-	LN1134B46ACR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MH	-	LN1134B47ACR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MK	-	LN1134B48ACR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4ML	-	LN1134B49ACR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MM	-	LN1134B50ACR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MN	-	LN1134B51ACR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MP	-	LN1134B52ACR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MR	-	LN1134B53ACR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MS	-	LN1134B54ACR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MT	-	LN1134B55ACR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MU	-	LN1134B56ACR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MV	-	LN1134B57ACR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MX	-	LN1134B58ACR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4MY	-	LN1134B59ACR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4N	-	RQ5RW42CA	LVR-IC	LDO, 4.2V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
4N	-	XC6127N35ENR	Vdet-IC	3.5V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4N	-	XC6221D281NR	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4N0	-	LN1134C31ACR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4N1	-	LN1134C32ACR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4N2	-	LN1134C33ACR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4N3	-	LN1134C34ACR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4N4	-	LN1134C35ACR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4N5	-	LN1134C36ACR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4N6	-	LN1134C37ACR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4N7	-	LN1134C38ACR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4N8	-	LN1134C39ACR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4N9	-	LN1134C40ACR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NA	-	LN1134C41ACR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NB	-	LN1134C42ACR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NC	-	LN1134C43ACR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4ND	-	LN1134C44ACR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NE	-	LN1134C45ACR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NF	-	LN1134C46ACR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NH	-	LN1134C47ACR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NK	-	LN1134C48ACR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NL	-	LN1134C49ACR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NM	-	LN1134C50ACR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NN	-	LN1134C51ACR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NP	-	LN1134C52ACR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NR	-	LN1134C53ACR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NS	-	LN1134C54ACR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NT	-	LN1134C55ACR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NU	-	LN1134C56ACR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NV	-	LN1134C57ACR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NX	-	LN1134C58ACR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4NY	-	LN1134C59ACR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4P	-	RQ5RW43CA	LVR-IC	LDO, 4.3V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
4P	-	XC6127N37ENR	Vdet-IC	3.7V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4P	-	XC6221D291NR	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4P0	-	LN1134D31ACR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4P1	-	LN1134D32ACR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4P2	-	LN1134D33ACR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4P3	-	LN1134D34ACR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4P4	-	LN1134D35ACR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4P5	-	LN1134D36ACR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4P6	-	LN1134D37ACR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4P7	-	LN1134D38ACR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4P8	-	LN1134D39ACR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4P9	-	LN1134D40ACR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PA	-	LN1134D41ACR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PB	-	LN1134D42ACR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PC	-	LN1134D43ACR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PD	-	LN1134D44ACR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PE	-	LN1134D45ACR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PF	-	LN1134D46ACR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PH	-	LN1134D47ACR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PK	-	LN1134D48ACR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PL	-	LN1134D49ACR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PM	-	LN1134D50ACR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PN	-	LN1134D51ACR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PP	-	LN1134D52ACR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PR	-	LN1134D53ACR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PS	-	LN1134D54ACR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PT	-	LN1134D55ACR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PU	-	LN1134D56ACR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PV	-	LN1134D57ACR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PX	-	LN1134D58ACR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4PY	-	LN1134D59ACR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4R	-	IMP162REUS	Vdet-IC	2.63V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
4R	-	RQ5RW44CA	LVR-IC	LDO, 4.4V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
4R	-	XC6127N39ENR	Vdet-IC	3.9V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4R	-	XC6221D301NR	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4S	-	IMP162SEUS	Vdet-IC	2.93V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
4S	-	RQ5RW45CA	LVR-IC	LDO, 4.5V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
4S	-	XC6127N41ENR	Vdet-IC	4.1V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4S	-	XC6221D311NR	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4T	-	IMP162TEUS	Vdet-IC	3.08V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5c	Imp
4T	-	RQ5RW46CA	LVR-IC	LDO, 4.6V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
4T	-	XC6127N43ENR	Vdet-IC	4.3V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4T	-	XC6221D321NR	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4U	-	RQ5RW47CA	LVR-IC	LDO, 4.7V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
4U	-	XC6127N45ENR	Vdet-IC	4.5V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4U	-	XC6221D331NR	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4V	-	RQ5RW48CA	LVR-IC	LDO, 4.8V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
4V	-	XC6127N47ENR	Vdet-IC	4.7V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4V	-	XC6221D341NR	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4V9	-	LN1134A102CR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VA	-	LN1134A112CR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VB	-	LN1134A122CR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VC	-	LN1134A132CR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VD	-	LN1134A142CR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VE	-	LN1134A152CR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VF	-	LN1134A162CR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VH	-	LN1134A172CR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VK	-	LN1134A182CR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VL	-	LN1134A192CR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VM	-	LN1134A202CR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VN	-	LN1134A212CR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VP	-	LN1134A222CR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VR	-	LN1134A232CR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VS	-	LN1134A242CR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VT	-	LN1134A252CR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VU	-	LN1134A262CR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VV	-	LN1134A272CR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VX	-	LN1134A282CR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VY	-	LN1134A292CR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4VZ	-	LN1134A302CR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR	SOT-343	23vn	VR4	5c	Nln
4W	-	RQ5RW49CA	LVR-IC	LDO, 4.9V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
4X	-	2SC4515	Si-npn	UHF, 15V, 50mA, 200mW, 7GHz	SOT-143	26tu	-	5c	Pan
4X	-	XC6127N49ENR	Vdet-IC	4.9V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4X	-	XC6221D351NR	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4X9	-	LN1134B102CR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XA	-	LN1134B112CR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XB	-	LN1134B122CR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XC	-	LN1134B132CR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XD	-	LN1134B142CR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XE	-	LN1134B152CR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XF	-	LN1134B162CR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XH	-	LN1134B172CR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XK	-	LN1134B182CR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XL	-	LN1134B192CR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XM	-	LN1134B202CR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XN	-	LN1134B212CR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XP	-	LN1134B222CR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XR	-	LN1134B232CR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XS	-	LN1134B242CR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XT	-	LN1134B252CR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XU	-	LN1134B262CR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XV	-	LN1134B272CR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XX	-	LN1134B282CR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XY	-	LN1134B292CR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4XZ	-	LN1134B302CR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-343	23vn	VR4	5c	Nln
4Y	-	2SC4516	Si-npn	UHF, 15V, 80mA, 200mW, 8GHz	SOT-143	26tu	-	5c	Pan
4Y	-	XC6127N51ENR	Vdet-IC	5.1V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4Y	-	XC6221D361NR	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4Y9	-	LN1134C102CR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YA	-	LN1134C112CR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YB	-	LN1134C122CR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YC	-	LN1134C132CR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YD	-	LN1134C142CR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YE	-	LN1134C152CR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YF	-	LN1134C162CR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YH	-	LN1134C172CR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YK	-	LN1134C182CR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YL	-	LN1134C192CR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YM	-	LN1134C202CR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4YN	-	LN1134C212CR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YP	-	LN1134C222CR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YR	-	LN1134C232CR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YS	-	LN1134C242CR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YT	-	LN1134C252CR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YU	-	LN1134C262CR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YV	-	LN1134C272CR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YX	-	LN1134C282CR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YY	-	LN1134C292CR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4YZ	-	LN1134C302CR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR	SOT-343	23vn	VR4	5c	Nln
4Z	-	XC6127N53ENR	Vdet-IC	5.3V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
4Z	-	XC6221D371NR	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
4Z9	-	LN1134D102CR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZA	-	LN1134D112CR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZB	-	LN1134D122CR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZC	-	LN1134D132CR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZD	-	LN1134D142CR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZE	-	LN1134D152CR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZF	-	LN1134D162CR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZH	-	LN1134D172CR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZK	-	LN1134D182CR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZL	-	LN1134D192CR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZM	-	LN1134D202CR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZN	-	LN1134D212CR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZP	-	LN1134D222CR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZR	-	LN1134D232CR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZS	-	LN1134D242CR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZT	-	LN1134D252CR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZU	-	LN1134D262CR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZV	-	LN1134D272CR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZX	-	LN1134D282CR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZY	-	LN1134D292CR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
4ZZ	-	LN1134D302CR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SOT-343	23vn	VR4	5c	Nln
5	gc	ELM7542NCB	Vdet-IC	4.2V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
5	gd	ELM7542CCB	Vdet-IC	4.2V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
50	-	AP8822N-20GI	Vdet-IC	2.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
50	-	AP8822N-20GS	Vdet-IC	2.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
50	-	AP8822N-20PI	Vdet-IC	2.0V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
50	-	AP8822N-20PS	Vdet-IC	2.0V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
50	-	R3111Q501B	Vdet-IC	5V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
50	-	XC6127C55ANR	Vdet-IC	5.5V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
50	-	XC6127N55FNR	Vdet-IC	5.5V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
50	-	XC6213B502NR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SSOT-24	26vn	VR4	5c	Tor
50	-	XC6221D381NR	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
503	-	S503T	MMIC	DG, UHF, 8V, 30mA, 200mW, Idss=9..18mA	SOT-143	24fd	A3	5c	Vs
504	-	S504T	MMIC	UHF, 8V, 30mA, 200mW, Idss=7..14mA	SOT-143	24fd	A3	5c	Vs
505	-	LN3526N5012M	Vdet-IC	5.0V±2%, -Reset ODO, -MR, 200ms	SOT-143	24vdh	VD4	5c	Nln
505	-	S505T	MMIC	UHF, 8V, 30mA, 200mW, Idss=8..16mA	SOT-143	24fd	A3	5c	Vs
506	-	LN3526N5042M	Vdet-IC	5.0V±2%, -Reset ODO, -MR, 400ms	SOT-143	24vdh	VD4	5c	Nln
507	-	LN3526N5052M	Vdet-IC	5.0V±2%, -Reset ODO, -MR, 50ms	SOT-143	24vdh	VD4	5c	Nln
50A	-	AAT60050A-S15	Vdet-IC	5.0V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
50B	-	AAT60050B-S15	Vdet-IC	5.0V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
50C	-	AAT60050C-S15	Vdet-IC	5.0V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
50D	-	AAT60050D-S15	Vdet-IC	5.0V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
51	-	AP8822N-21GI	Vdet-IC	2.1V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
51	-	AP8822N-21GS	Vdet-IC	2.1V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
51	-	AP8822N-21PI	Vdet-IC	2.1V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
51	-	AP8822N-21PS	Vdet-IC	2.1V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
51	-	R3111Q511B	Vdet-IC	5.1V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
51	-	XC6221D391NR	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
51A	-	AAT60051A-S15	Vdet-IC	5.1V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
51B	-	AAT60051B-S15	Vdet-IC	5.1V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
51C	-	AAT60051C-S15	Vdet-IC	5.1V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
51D	-	AAT60051D-S15	Vdet-IC	5.1V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
52	-	AP8822N-22GI	Vdet-IC	2.2V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
52	-	AP8822N-22GS	Vdet-IC	2.2V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
52	-	AP8822N-22PI	Vdet-IC	2.2V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
52	-	AP8822N-22PS	Vdet-IC	2.2V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
52	-	R3111Q521B	Vdet-IC	5.2V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
52	-	XC6221D401NR	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
52A	-	AAT60052A-S15	Vdet-IC	5.2V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
52B	-	AAT60052B-S15	Vdet-IC	5.2V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
52C	-	AAT60052C-S15	Vdet-IC	5.2V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
52D	-	AAT60052D-S15	Vdet-IC	5.2V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
53	-	AP8822N-23GI	Vdet-IC	2.3V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
53	-	AP8822N-23GS	Vdet-IC	2.3V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
53	-	AP8822N-23PI	Vdet-IC	2.3V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
53	-	AP8822N-23PS	Vdet-IC	2.3V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
53	-	R3111Q531B	Vdet-IC	5.3V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
53	-	XC6221D411NR	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
53A	-	AAT60053A-S15	Vdet-IC	5.3V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
53B	-	AAT60053B-S15	Vdet-IC	5.3V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
53C	-	AAT60053C-S15	Vdet-IC	5.3V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
53D	-	AAT60053D-S15	Vdet-IC	5.3V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
53R	-	S503TR	MMIC	DG, UHF, 8V, 30mA, 200mW, Idss=9..18mA	SOT-143R	26fm	A3	5c	Vs
54	-	AP8822N-24GI	Vdet-IC	2.4V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
54	-	AP8822N-24GS	Vdet-IC	2.4V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
54	-	AP8822N-24PI	Vdet-IC	2.4V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
54	-	AP8822N-24PS	Vdet-IC	2.4V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
54	-	R3111Q541B	Vdet-IC	5.4V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
54	-	XC6221D421NR	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
54A	-	AAT60054A-S15	Vdet-IC	5.4V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
54B	-	AAT60054B-S15	Vdet-IC	5.4V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
54C	-	AAT60054C-S15	Vdet-IC	5.4V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
54D	-	AAT60054D-S15	Vdet-IC	5.4V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
54R	-	S504TR	MMIC	UHF, 8V, 30mA, 200mW, Idss=7..14mA	SOT-143R	26fm	A3	5c	Vs
55	-	AP8822N-25GI	Vdet-IC	2.5V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
55	-	AP8822N-25GS	Vdet-IC	2.5V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
55	-	AP8822N-25PI	Vdet-IC	2.5V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
55	-	AP8822N-25PS	Vdet-IC	2.5V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
55	-	R3111Q551B	Vdet-IC	5.5V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
55	-	XC6221D431NR	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
55A	-	AAT60055A-S15	Vdet-IC	5.5V±2%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
55B	-	AAT60055B-S15	Vdet-IC	5.5V±2%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
55C	-	AAT60055C-S15	Vdet-IC	5.5V±1%, -Reset ODO	SOT-143R	26vdf	VD1	5c	Aat
55D	-	AAT60055D-S15	Vdet-IC	5.5V±1%, -Reset PPO	SOT-143R	26vdf	VD3	5c	Aat
55R	-	S505TR	MMIC	UHF, 8V, 30mA, 200mW, Idss=8..16mA	SOT-143R	26fm	A3	5c	Vs
56	-	AP8822N-26GI	Vdet-IC	2.6V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
56	-	AP8822N-26GS	Vdet-IC	2.6V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
56	-	AP8822N-26PI	Vdet-IC	2.6V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
56	-	AP8822N-26PS	Vdet-IC	2.6V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
56	-	R3111Q561B	Vdet-IC	5.6V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
56	-	XC6221D441NR	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
57	-	AP8822N-27GI	Vdet-IC	2.7V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
57	-	AP8822N-27GS	Vdet-IC	2.7V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
57	-	AP8822N-27PI	Vdet-IC	2.7V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
57	-	AP8822N-27PS	Vdet-IC	2.7V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
57	-	BAT17-07	Si-diode	Dual, Schottky, 4V, 130mA, Vf<0.6V(10mA), Cd<0.75pF	SOT-143	24ce	-	5b	Sie
57	-	R3111Q571B	Vdet-IC	5.7V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
57	-	XC6217C08ANR	LVR-IC	LDO, 0.85V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
57	-	XC6221D451NR	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
58	-	AP8822N-28GI	Vdet-IC	2.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
58	-	AP8822N-28GS	Vdet-IC	2.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
58	-	AP8822N-28PI	Vdet-IC	2.8V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
58	-	AP8822N-28PS	Vdet-IC	2.8V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
58	-	R3111Q581B	Vdet-IC	5.8V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
58	-	XC6217C09ANR	LVR-IC	LDO, 0.95V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
58	-	XC6221D461NR	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
59	-	AP8822N-29GI	Vdet-IC	2.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
59	-	AP8822N-29GS	Vdet-IC	2.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
59	-	AP8822N-29PI	Vdet-IC	2.9V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
59	-	AP8822N-29PS	Vdet-IC	2.9V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
59	-	R3111Q591B	Vdet-IC	5.9V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
59	-	XC6221D471NR	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
592	-	S592T	MMIC	UHF, 8V, 20mA, 160mW, Idss=50..500µA	SOT-143	24fd	A3	5c	Vs
593	-	S593T	MMIC	UHF, 8V, 30mA, 200mW, Idss=50..500µA	SOT-143	24fd	A3	5c	Vs
594	-	S594T	MMIC	UHF, 8V, 20mA, 160mW, Idss=50..500µA	SOT-143	24fd	A3	5c	Vs
595	-	S595T	MMIC	UHF, 8V, 20mA, 200µA, Idss=50..500µA	SOT-143	24fd	A3	5c	Vs
59R	-	S595TR	MMIC	UHF, 8V, 20mA, 200µA, Idss=50..500µA	SOT-143R	26fm	A3	5c	Vs
5A	-	R3132Q10EC	Vdet-IC	1V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5A	-	RQ5RW50AA	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
5A	-	XC6127C15ANR	Vdet-IC	1.5V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5A	-	XC6127N15FNR	Vdet-IC	1.5V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5A	-	XC6217C11ANR	LVR-IC	LDO, 1.15V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5A	-	XC6221D481NR	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
5A	-	XC6501A121NR-G	LVR-IC	LDO, 1.2V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5B	-	R3132Q11EC	Vdet-IC	1.1V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5B	-	RQ5RW51AA	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
5B	-	UMZ13K	Z-diode	Dual, 12.91..13.49V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
5B	-	XC6127C17ANR	Vdet-IC	1.7V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5B	-	XC6127N17FNR	Vdet-IC	1.7V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5B	-	XC6217C12ANR	LVR-IC	LDO, 1.25V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5B	-	XC6221D491NR	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
5B	-	XC6501A12ANR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5C	-	R3132Q12EC	Vdet-IC	1.2V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5C	-	RQ5RW52AA	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
5C	-	XC6127C19ANR	Vdet-IC	1.9V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5C	-	XC6127N19FNR	Vdet-IC	1.9V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5C	-	XC6217C13ANR	LVR-IC	LDO, 1.35V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5C	-	XC6221D501NR	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
5C	-	XC6501A131NR-G	LVR-IC	LDO, 1.3V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5D	-	R3132Q13EC	Vdet-IC	1.3V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5D	-	RQ5RW53AA	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
5D	-	XC6127C21ANR	Vdet-IC	2.1V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5D	-	XC6127N21FNR	Vdet-IC	2.1V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5D	-	XC6217C14ANR	LVR-IC	LDO, 1.45V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5D	-	XC6223B301NR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
5D	-	XC6501A13ANR-G	LVR-IC	LDO, 1.35V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5E	-	R3132Q14EC	Vdet-IC	1.4V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5E	-	RQ5RW54AA	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
5E	-	UMZ9.1K	Z-diode	Dual, 8.85..9.23V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
5E	-	XC6127C23ANR	Vdet-IC	2.3V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5E	-	XC6127N23FNR	Vdet-IC	2.3V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5E	-	XC6217C15ANR	LVR-IC	LDO, 1.55V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5E	-	XC6223B311NR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
5E	-	XC6501A141NR-G	LVR-IC	LDO, 1.4V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5F	-	R3132Q15EC	Vdet-IC	1.5V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5F	-	RQ5RW55AA	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
5F	-	XC6127C25ANR	Vdet-IC	2.5V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5F	-	XC6127N25FNR	Vdet-IC	2.5V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5F	-	XC6217C16ANR	LVR-IC	LDO, 1.65V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5F	-	XC6223B321NR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
5F	-	XC6501A14ANR-G	LVR-IC	LDO, 1.45V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5G	-	R3132Q16EC	Vdet-IC	1.6V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5G	-	RQ5RW56AA	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
5H	-	R3132Q17EC	Vdet-IC	1.7V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5H	-	RQ5RW57AA	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
5H	-	XC6127C27ANR	Vdet-IC	2.7V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5H	-	XC6127N27FNR	Vdet-IC	2.7V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5H	-	XC6217C17ANR	LVR-IC	LDO, 1.75V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5H	-	XC6223B331NR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
5H	-	XC6501A151NR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5J	-	R3132Q18EC	Vdet-IC	1.8V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5J	-	RQ5RW58AA	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
5K	-	R3132Q19EC	Vdet-IC	1.9V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5K	-	RQ5RW59AA	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
5K	-	XC6127C29ANR	Vdet-IC	2.9V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5K	-	XC6127N29FNR	Vdet-IC	2.9V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5K	-	XC6217C18ANR	LVR-IC	LDO, 1.85V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5K	-	XC6223B341NR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
5K	-	XC6501A15ANR-G	LVR-IC	LDO, 1.55V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5L	-	R3133Q10EC	Vdet-IC	1V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5L	-	RQ5RW50CA	LVR-IC	LDO, 5.0V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
5L	-	XC6127C31ANR	Vdet-IC	3.1V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5L	-	XC6127N31FNR	Vdet-IC	3.1V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5L	-	XC6217C19ANR	LVR-IC	LDO, 1.95V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5L	-	XC6223B351NR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
5L	-	XC6501A161NR-G	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5M	-	R3133Q11EC	Vdet-IC	1.1V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5M	-	RQ5RW51CA	LVR-IC	LDO, 5.1V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5M	-	XC6127C33ANR	Vdet-IC	3.3V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5M	-	XC6127N33FNR	Vdet-IC	3.3V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5M	-	XC6217C20ANR	LVR-IC	LDO, 2.05V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5M	-	XC6223B361NR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
5M	-	XC6501A16ANR-G	LVR-IC	LDO, 1.65V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5N	-	R3133Q12EC	Vdet-IC	1.2V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5N	-	RQ5RW52CA	LVR-IC	LDO, 5.2V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
5N	-	XC6127C35ANR	Vdet-IC	3.5V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5N	-	XC6127N35FNR	Vdet-IC	3.5V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5N	-	XC6217C21ANR	LVR-IC	LDO, 2.15V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5N	-	XC6501A171NR-G	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5P	-	R3133Q13EC	Vdet-IC	1.3V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5P	-	RQ5RW53CA	LVR-IC	LDO, 5.3V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
5P	-	XC6127C37ANR	Vdet-IC	3.7V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5P	-	XC6127N37FNR	Vdet-IC	3.7V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5P	-	XC6217C22ANR	LVR-IC	LDO, 2.25V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5P	-	XC6223B371NR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
5P	-	XC6501A17ANR-G	LVR-IC	LDO, 1.75V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5Q	-	R3133Q14EC	Vdet-IC	1.4V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5R	-	R3133Q15EC	Vdet-IC	1.5V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5R	-	RQ5RW54CA	LVR-IC	LDO, 5.4V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
5R	-	XC6127C39ANR	Vdet-IC	3.9V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5R	-	XC6127N39FNR	Vdet-IC	3.9V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5R	-	XC6217C23ANR	LVR-IC	LDO, 2.35V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5R	-	XC6223B381NR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
5R	-	XC6501A181NR-G	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5S	-	R3133Q16EC	Vdet-IC	1.6V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5S	-	RQ5RW55CA	LVR-IC	LDO, 5.5V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
5S	-	XC6127C41ANR	Vdet-IC	4.1V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5S	-	XC6127N41FNR	Vdet-IC	4.1V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5S	-	XC6217C24ANR	LVR-IC	LDO, 2.45V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5S	-	XC6223B391NR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
5S	-	XC6501A18ANR-G	LVR-IC	LDO, 1.85V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5T	-	R3133Q17EC	Vdet-IC	1.7V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5T	-	RQ5RW56CA	LVR-IC	LDO, 5.6V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
5T	-	XC6127C43ANR	Vdet-IC	4.3V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5T	-	XC6127N43FNR	Vdet-IC	4.3V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5T	-	XC6217C25ANR	LVR-IC	LDO, 2.55V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5T	-	XC6223B401NR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
5T	-	XC6501A191NR-G	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5U	-	R3133Q18EC	Vdet-IC	1.8V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5U	-	RQ5RW57CA	LVR-IC	LDO, 5.7V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
5U	-	UMZ3.6K	Z-diode	Dual, 3.60..3.845V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
5U	-	XC6127C45ANR	Vdet-IC	4.5V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5U	-	XC6127N45FNR	Vdet-IC	4.5V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5U	-	XC6217C26ANR	LVR-IC	LDO, 2.65V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5U	-	XC6501A19ANR-G	LVR-IC	LDO, 1.95V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5V	-	R3133Q19EC	Vdet-IC	1.9V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
5V	-	RQ5RW58CA	LVR-IC	LDO, 5.8V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
5V	-	UMZ3.9K	Z-diode	Dual, 3.89..4.16V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
5V	-	XC6127C47ANR	Vdet-IC	4.7V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5V	-	XC6127N47FNR	Vdet-IC	4.7V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5V	-	XC6217C27ANR	LVR-IC	LDO, 2.75V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5V	-	XC6501A201NR-G	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5W	-	RQ5RW59CA	LVR-IC	LDO, 5.9V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
5W	-	UMZ4.3K	Z-diode	Dual, 4.17..4.43V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
5X	-	UMZ4.7K	Z-diode	Dual, 4.55..4.75V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
5X	-	XC6127C49ANR	Vdet-IC	4.9V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5X	-	XC6127N49FNR	Vdet-IC	4.9V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5X	-	XC6217C28ANR	LVR-IC	LDO, 2.85V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5X	-	XC6501A20ANR-G	LVR-IC	LDO, 2.05V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5Y	-	UMZ5.1K	Z-diode	Dual, 4.98..5.20V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
5Y	-	XC6127C51ANR	Vdet-IC	5.1V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5Y	-	XC6127N51FNR	Vdet-IC	5.1V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5Y	-	XC6217C29ANR	LVR-IC	LDO, 2.95V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5Y	-	XC6501A211NR-G	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
5Z	-	UMZ6.2K	Z-diode	Dual, 6.06..6.33V, Izt=5mA, 200mW	SOT-343	23dv	-	5f	Rhm
5Z	-	XC6127C53ANR	Vdet-IC	5.3V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
5Z	-	XC6127N53FNR	Vdet-IC	5.3V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
5Z	-	XC6217C30ANR	LVR-IC	LDO, 3.05V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5Z	-	XC6501A21ANR-G	LVR-IC	LDO, 2.15V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6	gc	ELM7543NCB	Vdet-IC	4.3V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
6	gd	ELM7543CCB	Vdet-IC	4.3V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
6.2W	-	MAZ3062W	Z-diode	Dual, 6.2V, If=100mA, Zzt=20Ω, 200mW	SOT-143	24ce	-	5b	Pan
60	-	AP8822N-30GI	Vdet-IC	3.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
60	-	AP8822N-30GS	Vdet-IC	3.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
60	-	AP8822N-30PI	Vdet-IC	3.0V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
60	-	AP8822N-30PS	Vdet-IC	3.0V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
60	-	BAR60	PIN-diode	Triple, RF, 100V, 140mA, 250mW, Vf<1.25V (100mA), <0.5pF	SOT-143	24cd	-	5b	Sie
60	-	R3111Q601B	Vdet-IC	6V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
60	-	XC6127C55BNR	Vdet-IC	5.5V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
60	-	XC6127N55GNR	Vdet-IC	5.5V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
60	-	XC6217C31ANR	LVR-IC	LDO, 3.15V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
60	-	XC6221D08BNR	LVR-IC	LDO, 0.85V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
61	-	AP8822N-31GI	Vdet-IC	3.1V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
61	-	AP8822N-31GS	Vdet-IC	3.1V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
61	-	AP8822N-31PI	Vdet-IC	3.1V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
61	-	AP8822N-31PS	Vdet-IC	3.1V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
61	-	BAR61	PIN-diode	Triple, RF, 100V, 140mA, 250mW, Vf<1.25V (100mA), <0.5pF	SOT-143	24do	-	5b	Sie
61	-	XC6217C32ANR	LVR-IC	LDO, 3.25V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
61	-	XC6221D09BNR	LVR-IC	LDO, 0.95V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
61s	-	BAR61	PIN-diode	Triple, RF, 100V, 140mA, 250mW, Vf<1.25V (100mA), <0.5pF	SOT-143	24do	-	5h	Inf
62	-	AP8822N-32GI	Vdet-IC	3.2V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
62	-	AP8822N-32GS	Vdet-IC	3.2V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
62	-	AP8822N-32PI	Vdet-IC	3.2V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
62	-	AP8822N-32PS	Vdet-IC	3.2V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
62	-	BAT62	Si-diode	Dual, Schottky, 40V, 20mA, Vf<1.0V, Cd<0.6pF	SOT-143	24cs	-	5h	Kex
62	-	XC6217C33ANR	LVR-IC	LDO, 3.35V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
62	-	XC6221D10BNR	LVR-IC	LDO, 1.05V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
62s	-	BAT62	Si-diode	Dual, Schottky, 40V, 20mA, Vf<1.0V, Cd<0.6pF	SOT-143	24cs	-	5h	Inf
62s	-	BAT62-07W	Si-diode	Dual, Schottky, 40V, 20mA, Vf<1.0V, Cd<0.6pF	SOT-343	26ce	-	5h	Inf
63	-	AP8822N-33GI	Vdet-IC	3.3V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
63	-	AP8822N-33GS	Vdet-IC	3.3V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
63	-	AP8822N-33PI	Vdet-IC	3.3V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
63	-	AP8822N-33PS	Vdet-IC	3.3V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
63	-	XC6217C34ANR	LVR-IC	LDO, 3.45V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
63	-	XC6221D11BNR	LVR-IC	LDO, 1.15V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
64	-	AP8822N-34GI	Vdet-IC	3.4V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
64	-	AP8822N-34GS	Vdet-IC	3.4V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
64	-	AP8822N-34PI	Vdet-IC	3.4V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
64	-	AP8822N-34PS	Vdet-IC	3.4V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
64	-	XC6217C35ANR	LVR-IC	LDO, 3.55V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
64	-	XC6221D12BNR	LVR-IC	LDO, 1.25V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
65	-	AP8822N-35GI	Vdet-IC	3.5V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
65	-	AP8822N-35GS	Vdet-IC	3.5V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
65	-	AP8822N-35PI	Vdet-IC	3.5V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
65	-	AP8822N-35PS	Vdet-IC	3.5V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
65	-	XC6217C36ANR	LVR-IC	LDO, 3.65V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
65	-	XC6221D13BNR	LVR-IC	LDO, 1.35V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
66	-	AP8822N-36GI	Vdet-IC	3.6V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
66	-	AP8822N-36GS	Vdet-IC	3.6V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
66	-	AP8822N-36PI	Vdet-IC	3.6V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
66	-	AP8822N-36PS	Vdet-IC	3.6V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
66	-	XC6217C37ANR	LVR-IC	LDO, 3.75V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
66	-	XC6221D14BNR	LVR-IC	LDO, 1.45V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
67	-	AP8822N-37GI	Vdet-IC	3.7V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
67	-	AP8822N-37GS	Vdet-IC	3.7V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
67	-	AP8822N-37PI	Vdet-IC	3.7V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
67	-	AP8822N-37PS	Vdet-IC	3.7V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
67	-	XC6217C38ANR	LVR-IC	LDO, 3.85V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
67	-	XC6221D15BNR	LVR-IC	LDO, 1.55V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
68	-	AP8822N-38GI	Vdet-IC	3.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
68	-	AP8822N-38GS	Vdet-IC	3.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
68	-	AP8822N-38PI	Vdet-IC	3.8V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
68	-	AP8822N-38PS	Vdet-IC	3.8V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
68	-	XC6217C39ANR	LVR-IC	LDO, 3.95V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
68	-	XC6221D16BNR	LVR-IC	LDO, 1.65V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
69	-	AP8822N-39GI	Vdet-IC	3.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
69	-	AP8822N-39GS	Vdet-IC	3.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
69	-	AP8822N-39PI	Vdet-IC	3.9V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
69	-	AP8822N-39PS	Vdet-IC	3.9V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
69	-	XC6217C402NR	LVR-IC	LDO, 4.0V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
69	-	XC6221D17BNR	LVR-IC	LDO, 1.75V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
692Ax	-	SS8039L263TC	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ssc
692Bx	-	SS8039L293TC	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ssc
692Cx	-	SS8039L308TC	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ssc
692Dx	-	SS8039L400TC	Vdet-IC	4.0V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ssc
692Ex	-	SS8039L438TC	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ssc
692Fx	-	SS8039L463TC	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ssc
692Gx	-	SS8039H263TC	Vdet-IC	2.63V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ssc
692Hx	-	SS8039H293TC	Vdet-IC	2.93V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ssc
692Ix	-	SS8039H308TC	Vdet-IC	3.08V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ssc
692Jx	-	SS8039H400TC	Vdet-IC	4.0V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ssc
692Kx	-	SS8039H438TC	Vdet-IC	4.38V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ssc
692Lx	-	SSSS8039H463TC	Vdet-IC	4.63V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ssc
6A	-	R3132Q20EC	Vdet-IC	2V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6A	-	RQ5RW60AA	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
6A	-	XC6127C15BNR	Vdet-IC	1.5V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6A	-	XC6127N15GNR	Vdet-IC	1.5V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6A	-	XC6221D18BNR	LVR-IC	LDO, 1.85V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6A	-	XC6501A221NR-G	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6B	-	R3132Q21EC	Vdet-IC	2.1V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6B	-	RQ5RW19AA	LVR-IC	LDO, 1.9V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
6B	-	XC6127C17BNR	Vdet-IC	1.7V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6B	-	XC6127N17GNR	Vdet-IC	1.7V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6B	-	XC6221D19BNR	LVR-IC	LDO, 1.95V±20mV, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6B	-	XC6501A22ANR-G	LVR-IC	LDO, 2.25V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6C	-	R3132Q22EC	Vdet-IC	2.2V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6C	-	RQ5RW18AA	LVR-IC	LDO, 1.8V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
6C	-	XC6127C19BNR	Vdet-IC	1.9V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6C	-	XC6127N19GNR	Vdet-IC	1.9V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6C	-	XC6221D20BNR	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6C	-	XC6501A231NR-G	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6D	-	R3132Q23EC	Vdet-IC	2.3V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6D	-	RQ5RW17AA	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
6D	-	XC6127C21BNR	Vdet-IC	2.1V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6D	-	XC6127N21GNR	Vdet-IC	2.1V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6D	-	XC6221D21BNR	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6D	-	XC6501A23ANR-G	LVR-IC	LDO, 2.35V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6E	-	R3132Q24EC	Vdet-IC	2.4V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6E	-	RQ5RW16AA	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
6E	-	XC6127C23BNR	Vdet-IC	2.3V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6E	-	XC6127N23GNR	Vdet-IC	2.3V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6E	-	XC6221D22BNR	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6E	-	XC6501A241NR-G	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6F	-	R3132Q25EC	Vdet-IC	2.5V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6F	-	RQ5RW15AA	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	SC-82AB	26vp	VR4	5m	Ric
6F	-	XC6127C25BNR	Vdet-IC	2.5V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6F	-	XC6127N25GNR	Vdet-IC	2.5V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6F	-	XC6221D23BNR	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6F	-	XC6501A24ANR-G	LVR-IC	LDO, 2.45V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6G	-	R3132Q26EC	Vdet-IC	2.6V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6H	-	R3132Q27EC	Vdet-IC	2.7V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6H	-	XC6127C27BNR	Vdet-IC	2.7V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6H	-	XC6127N27GNR	Vdet-IC	2.7V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6H	-	XC6221D24BNR	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6H	-	XC6501A251NR-G	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6J	-	R3132Q28EC	Vdet-IC	2.8V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6K	-	R3132Q29EC	Vdet-IC	2.9V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6K	-	XC6127C29BNR	Vdet-IC	2.9V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6K	-	XC6127N29GNR	Vdet-IC	2.9V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6K	-	XC6221D25BNR	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6K	-	XC6501A25ANR-G	LVR-IC	LDO, 2.55V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6L	-	R3133Q20EC	Vdet-IC	2V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6L	-	RQ5RW60CA	LVR-IC	LDO, 6.0V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
6L	-	XC6127C31BNR	Vdet-IC	3.1V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6L	-	XC6127N31GNR	Vdet-IC	3.1V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6L	-	XC6221D26BNR	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6L	-	XC6501A261NR-G	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6M	-	R3133Q21EC	Vdet-IC	2.1V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6M	-	RQ5RW19CA	LVR-IC	LDO, 1.9V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
6M	-	XC6127C33BNR	Vdet-IC	3.3V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6M	-	XC6127N33GNR	Vdet-IC	3.3V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6M	-	XC6221D27BNR	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6M	-	XC6501A26ANR-G	LVR-IC	LDO, 2.65V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6N	-	R3133Q22EC	Vdet-IC	2.2V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6N	-	RQ5RW18CA	LVR-IC	LDO, 1.8V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
6N	-	XC6127C35BNR	Vdet-IC	3.5V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6N	-	XC6127N35GNR	Vdet-IC	3.5V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6N	-	XC6221D28BNR	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6N	-	XC6501A271NR-G	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6P	-	R3133Q23EC	Vdet-IC	2.3V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6P	-	RQ5RW17CA	LVR-IC	LDO, 1.7V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
6P	-	XC6127C37BNR	Vdet-IC	3.7V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6P	-	XC6127N37GNR	Vdet-IC	3.7V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6P	-	XC6221D29BNR	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6P	-	XC6501A27ANR-G	LVR-IC	LDO, 2.75V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6Q	-	R3133Q24EC	Vdet-IC	2.4V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6R	-	R3133Q25EC	Vdet-IC	2.5V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6R	-	XC6127C39BNR	Vdet-IC	3.9V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6R	-	XC6127N39GNR	Vdet-IC	3.9V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6R	-	XC6221D30BNR	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6R	-	XC6501A281NR-G	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6S	-	R3133Q26EC	Vdet-IC	2.6V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6S	-	RQ5RW16CA	LVR-IC	LDO, 1.6V±2%, 150mA	SC-82AB	26vs	VR1	5m	Ric
6S	-	XC6127C41BNR	Vdet-IC	4.1V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6S	-	XC6127N41GNR	Vdet-IC	4.1V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6S	-	XC6221D31BNR	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6S	-	XC6501A28ANR-G	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6T	-	R3133Q27EC	Vdet-IC	2.7V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6T	-	XC6127C43BNR	Vdet-IC	4.3V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6T	-	XC6127N43GNR	Vdet-IC	4.3V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6T	-	XC6221D32BNR	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6T	-	XC6501A291NR-G	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6U	-	R3133Q28EC	Vdet-IC	2.8V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6U	-	XC6127C45BNR	Vdet-IC	4.5V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6U	-	XC6127N45GNR	Vdet-IC	4.5V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6U	-	XC6221D33BNR	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6U	-	XC6501A29ANR-G	LVR-IC	LDO, 2.95V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6V	-	R3133Q29EC	Vdet-IC	2.9V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
6V	-	XC6127C47BNR	Vdet-IC	4.7V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6V	-	XC6127N47GNR	Vdet-IC	4.7V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6V	-	XC6221D34BNR	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6V	-	XC6501A301NR-G	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6X	-	XC6127C49BNR	Vdet-IC	4.9V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6X	-	XC6127N49GNR	Vdet-IC	4.9V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6X	-	XC6221D35BNR	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6X	-	XC6501A30ANR-G	LVR-IC	LDO, 3.05V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6Y	-	XC6127C51BNR	Vdet-IC	5.1V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6Y	-	XC6127N51GNR	Vdet-IC	5.1V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6Y	-	XC6221D36BNR	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6Y	-	XC6501A311NR-G	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
6Z	-	XC6127C53BNR	Vdet-IC	5.3V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
6Z	-	XC6127N53GNR	Vdet-IC	5.3V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
6Z	-	XC6221D37BNR	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
6Z	-	XC6501A31ANR-G	LVR-IC	LDO, 3.15V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7	gc	ELM7545NCB	Vdet-IC	4.5V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
7	gd	ELM7545CCB	Vdet-IC	4.5V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
70	-	AP8822N-40GI	Vdet-IC	4.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
70	-	AP8822N-40GS	Vdet-IC	4.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
70	-	AP8822N-40PI	Vdet-IC	4.0V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
70	-	AP8822N-40PS	Vdet-IC	4.0V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
70	-	XC6127C55CNR	Vdet-IC	5.5V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
70	-	XC6127N55HNR	Vdet-IC	5.5V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
70	-	XC6221D38BNR	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
71	-	AP8822N-41GI	Vdet-IC	4.1V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
71	-	AP8822N-41GS	Vdet-IC	4.1V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
71	-	AP8822N-41PI	Vdet-IC	4.1V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
71	-	AP8822N-41PS	Vdet-IC	4.1V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
71	-	MGA-71543	MMIC	Ga-As, LN, RF amp, 0.1..6GHz, 15dB (50Ω), Vcc=3.3V	SOT-343	26am	A1	5c	Agi



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
71	-	XC6221D39BNR	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
72	-	AP8822N-42GI	Vdet-IC	4.2V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
72	-	AP8822N-42GS	Vdet-IC	4.2V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
72	-	AP8822N-42PI	Vdet-IC	4.2V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
72	-	AP8822N-42PS	Vdet-IC	4.2V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
72	-	MGA-72543	MMIC	Ga-As LN, RF amp, 0.1..6GHz, 14dB (50Ω), Vcc=3.3V	SOT-343	26am	A1	5c	Agi
72	-	XC6221D40BNR	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
73	-	AP8822N-43GI	Vdet-IC	4.3V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
73	-	AP8822N-43GS	Vdet-IC	4.3V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
73	-	AP8822N-43PI	Vdet-IC	4.3V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
73	-	AP8822N-43PS	Vdet-IC	4.3V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
73	-	XC6221D41BNR	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
74	-	AP8822N-44GI	Vdet-IC	4.4V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
74	-	AP8822N-44GS	Vdet-IC	4.4V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
74	-	AP8822N-44PI	Vdet-IC	4.4V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
74	-	AP8822N-44PS	Vdet-IC	4.4V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
74	-	XC6221D42BNR	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
75	-	AP8822N-45GI	Vdet-IC	4.5V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
75	-	AP8822N-45GS	Vdet-IC	4.5V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
75	-	AP8822N-45PI	Vdet-IC	4.5V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
75	-	AP8822N-45PS	Vdet-IC	4.5V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
75	-	XC6221D43BNR	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
76	-	AP8822N-46GI	Vdet-IC	4.6V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
76	-	AP8822N-46GS	Vdet-IC	4.6V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
76	-	AP8822N-46PI	Vdet-IC	4.6V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
76	-	AP8822N-46PS	Vdet-IC	4.6V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
76	-	XC6221D44BNR	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
77	-	AP8822N-47GI	Vdet-IC	4.7V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
77	-	AP8822N-47GS	Vdet-IC	4.7V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
77	-	AP8822N-47PI	Vdet-IC	4.7V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
77	-	AP8822N-47PS	Vdet-IC	4.7V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
77	-	XC6217D08ANR	LVR-IC	LDO, 0.85V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
77	-	XC6221D45BNR	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
77-	-	BAS70-07	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-143B	24ce	-	5c	NxH
77p	-	BAS70-07	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-143B	24ce	-	5c	NxH
77s	-	BAS70-07	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-143	24ce	-	5h	Inf
77s	-	BAS70-07W	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-343	24ce	-	5h	Inf
77t	-	BAS70-07	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-143B	24ce	-	5c	NxM
77W	-	BAS70-07	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-143B	24ce	-	5c	NxC
78	-	AP8822N-48GI	Vdet-IC	4.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
78	-	AP8822N-48GS	Vdet-IC	4.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
78	-	AP8822N-48PI	Vdet-IC	4.8V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
78	-	AP8822N-48PS	Vdet-IC	4.8V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
78	-	XC6217D09ANR	LVR-IC	LDO, 0.95V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
78	-	XC6221D46BNR	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
79	-	AP8822N-49GI	Vdet-IC	4.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
79	-	AP8822N-49GS	Vdet-IC	4.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
79	-	AP8822N-49PI	Vdet-IC	4.9V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
79	-	AP8822N-49PS	Vdet-IC	4.9V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
79	-	XC6221D47BNR	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
7A	-	R3132Q30EC	Vdet-IC	3V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7A	-	RQ5RW20BA	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
7A	-	XC6127C15CNR	Vdet-IC	1.5V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7A	-	XC6127N15HNR	Vdet-IC	1.5V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7A	-	XC6217D11ANR	LVR-IC	LDO, 1.15V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7A	-	XC6221D48BNR	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
7A	-	XC6501A321NR-G	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7B	-	R3132Q31EC	Vdet-IC	3.1V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7B	-	RQ5RW21BA	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
7B	-	XC6127C17CNR	Vdet-IC	1.7V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7B	-	XC6127N17HNR	Vdet-IC	1.7V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7B	-	XC6217D12ANR	LVR-IC	LDO, 1.25V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7B	-	XC6221D49BNR	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5m	Tor
7B	-	XC6501A32ANR-G	LVR-IC	LDO, 3.25V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7C	-	R3132Q32EC	Vdet-IC	3.2V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7C	-	RQ5RW22BA	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
7C	-	XC6127C19CNR	Vdet-IC	1.9V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7C	-	XC6127N19HNR	Vdet-IC	1.9V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7C	-	XC6217D13ANR	LVR-IC	LDO, 1.35V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7C	-	XC6501A331NR-G	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7D	-	R3132Q33EC	Vdet-IC	3.3V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7D	-	RQ5RW23BA	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
7D	-	XC6127C21CNR	Vdet-IC	2.1V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7D	-	XC6127N21HNR	Vdet-IC	2.1V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7D	-	XC6217D14ANR	LVR-IC	LDO, 1.45V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7D	-	XC6223C301NR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
7D	-	XC6501A33ANR-G	LVR-IC	LDO, 3.35V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7E	-	R3132Q34EC	Vdet-IC	3.4V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7E	-	RQ5RW24BA	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
7E	-	XC6127C23CNR	Vdet-IC	2.3V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7E	-	XC6127N23HNR	Vdet-IC	2.3V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7E	-	XC6217D15ANR	LVR-IC	LDO, 1.55V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7E	-	XC6223C311NR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
7E	-	XC6501A341NR-G	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7F	-	R3132Q35EC	Vdet-IC	3.5V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7F	-	RQ5RW25BA	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
7F	-	XC6127C25CNR	Vdet-IC	2.5V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7F	-	XC6127N25HNR	Vdet-IC	2.5V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7F	-	XC6217D16ANR	LVR-IC	LDO, 1.65V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7F	-	XC6223C321NR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
7F	-	XC6501A34ANR-G	LVR-IC	LDO, 3.45V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7G	-	R3132Q36EC	Vdet-IC	3.6V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7G	-	RQ5RW26BA	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
7H	-	R3132Q37EC	Vdet-IC	3.7V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7H	-	RQ5RW27BA	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
7H	-	XC6127C27CNR	Vdet-IC	2.7V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7H	-	XC6127N27HNR	Vdet-IC	2.7V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7H	-	XC6217D17ANR	LVR-IC	LDO, 1.75V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7H	-	XC6223C331NR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
7H	-	XC6501A351NR-G	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7J	-	R3132Q38EC	Vdet-IC	3.8V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7J	-	RQ5RW28BA	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
7K	-	R3132Q39EC	Vdet-IC	3.9V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7K	-	RQ5RW29BA	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
7K	-	XC6127C29CNR	Vdet-IC	2.9V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7K	-	XC6127N29HNR	Vdet-IC	2.9V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7K	-	XC6217D18ANR	LVR-IC	LDO, 1.85V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7K	-	XC6223C341NR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
7K	-	XC6501A35ANR-G	LVR-IC	LDO, 3.55V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7L	-	R3133Q30EC	Vdet-IC	3V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7L	-	XC6127C31CNR	Vdet-IC	3.1V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7L	-	XC6127N31HNR	Vdet-IC	3.1V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7L	-	XC6217D19ANR	LVR-IC	LDO, 1.95V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7L	-	XC6223C351NR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
7L	-	XC6501A361NR-G	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7M	-	R3133Q31EC	Vdet-IC	3.1V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7M	-	XC6127C33CNR	Vdet-IC	3.3V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7M	-	XC6127N33HNR	Vdet-IC	3.3V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7M	-	XC6217D20ANR	LVR-IC	LDO, 2.05V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7M	-	XC6223C361NR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
7M	-	XC6501A36ANR-G	LVR-IC	LDO, 3.65V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7N	-	R3133Q32EC	Vdet-IC	3.2V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7N	-	XC6127C35CNR	Vdet-IC	3.5V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7N	-	XC6127N35HNR	Vdet-IC	3.5V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7N	-	XC6217D21ANR	LVR-IC	LDO, 2.15V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7N	-	XC6501A371NR-G	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7P	-	R3133Q33EC	Vdet-IC	3.3V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7P	-	XC6127C37CNR	Vdet-IC	3.7V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7P	-	XC6127N37HNR	Vdet-IC	3.7V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7P	-	XC6217D22ANR	LVR-IC	LDO, 2.25V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7P	-	XC6223C371NR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
7P	-	XC6501A37ANR-G	LVR-IC	LDO, 3.75V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7Q	-	R3133Q34EC	Vdet-IC	3.4V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7R	-	R3133Q35EC	Vdet-IC	3.5V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7R	-	XC6127C39CNR	Vdet-IC	3.9V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7R	-	XC6127N39HNR	Vdet-IC	3.9V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7R	-	XC6217D23ANR	LVR-IC	LDO, 2.35V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7R	-	XC6223C381NR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
7R	-	XC6501A381NR-G	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7S	-	R3133Q36EC	Vdet-IC	3.6V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7S	-	XC6127C41CNR	Vdet-IC	4.1V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7S	-	XC6127N41HNR	Vdet-IC	4.1V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7S	-	XC6217D24ANR	LVR-IC	LDO, 2.45V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7S	-	XC6223C391NR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
7S	-	XC6501A38ANR-G	LVR-IC	LDO, 3.85V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7T	-	R3133Q37EC	Vdet-IC	3.7V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7T	-	XC6127C43CNR	Vdet-IC	4.3V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7T	-	XC6127N43HNR	Vdet-IC	4.3V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7T	-	XC6217D25ANR	LVR-IC	LDO, 2.55V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7T	-	XC6223C401NR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
7T	-	XC6501A391NR-G	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7U	-	R3133Q38EC	Vdet-IC	3.8V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7U	-	XC6127C45CNR	Vdet-IC	4.5V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7U	-	XC6127N45HNR	Vdet-IC	4.5V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7U	-	XC6217D26ANR	LVR-IC	LDO, 2.65V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7U	-	XC6501A39ANR-G	LVR-IC	LDO, 3.95V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7V	-	R3133Q39EC	Vdet-IC	3.9V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
7V	-	XC6127C47CNR	Vdet-IC	4.7V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7V	-	XC6127N47HNR	Vdet-IC	4.7V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7V	-	XC6217D27ANR	LVR-IC	LDO, 2.75V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7V	-	XC6501A401NR-G	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7X	-	XC6127C49CNR	Vdet-IC	4.9V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7X	-	XC6127N49HNR	Vdet-IC	4.9V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7X	-	XC6217D28ANR	LVR-IC	LDO, 2.85V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7X	-	XC6501A40ANR-G	LVR-IC	LDO, 4.05V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7Y	-	XC6127C51CNR	Vdet-IC	5.1V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7Y	-	XC6127N51HNR	Vdet-IC	5.1V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7Y	-	XC6217D29ANR	LVR-IC	LDO, 2.95V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7Y	-	XC6501A411NR-G	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
7Z	-	XC6127C53CNR	Vdet-IC	5.3V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
7Z	-	XC6127N53HNR	Vdet-IC	5.3V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
7Z	-	XC6217D30ANR	LVR-IC	LDO, 3.05V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
7Z	-	XC6501A41ANR-G	LVR-IC	LDO, 4.15V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8	gc	ELM7550NCB	Vdet-IC	5.0V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
8	gd	ELM7550CCB	Vdet-IC	5.0V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
80	-	AP8822N-50GI	Vdet-IC	5.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
80	-	AP8822N-50GS	Vdet-IC	5.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
80	-	AP8822N-50PI	Vdet-IC	5.0V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
80	-	AP8822N-50PS	Vdet-IC	5.0V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
80	-	XC6127C55DNR	Vdet-IC	5.5V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
80	-	XC6127N55JNR	Vdet-IC	5.5V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
80	-	XC6217D31ANR	LVR-IC	LDO, 3.15V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
81	-	AP8822N-51GI	Vdet-IC	5.1V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
81	-	AP8822N-51GS	Vdet-IC	5.1V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
81	-	AP8822N-51PI	Vdet-IC	5.1V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
81	-	AP8822N-51PS	Vdet-IC	5.1V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
81	-	XC6217D32ANR	LVR-IC	LDO, 3.25V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
811J	-	SGM811-JXKA4	Vdet-IC	4.0V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5b	Sgm
811L	-	SGM811-LXKA4	Vdet-IC	4.63V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5b	Sgm
811M	-	SGM811-MXKA4	Vdet-IC	4.38V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5b	Sgm
811R	-	SGM811-RXKA4	Vdet-IC	2.63V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5b	Sgm
811S	-	SGM811-SXKA4	Vdet-IC	2.93V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5b	Sgm
811T	-	SGM811-TXKA4	Vdet-IC	3.08V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5b	Sgm
811Z	-	SGM811-ZXKA4	Vdet-IC	2.32V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5b	Sgm
812J	-	SGM812-JXKA4	Vdet-IC	4.0V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5b	Sgm
812L	-	SGM812-LXKA4	Vdet-IC	4.63V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5b	Sgm
812M	-	SGM812-MXKA4	Vdet-IC	4.38V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5b	Sgm
812R	-	SGM812-RXKA4	Vdet-IC	2.63V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5b	Sgm
812S	-	SGM812-SXKA4	Vdet-IC	2.93V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5b	Sgm
812T	-	SGM812-TXKA4	Vdet-IC	3.08V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5b	Sgm
812Z	-	SGM812-ZXKA4	Vdet-IC	2.32V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5b	Sgm
82	-	AP8822N-52GI	Vdet-IC	5.2V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
82	-	AP8822N-52GS	Vdet-IC	5.2V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
82	-	AP8822N-52PI	Vdet-IC	5.2V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
82	-	AP8822N-52PS	Vdet-IC	5.2V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
82	-	XC6217D33ANR	LVR-IC	LDO, 3.35V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
82	-	XC6223A12BNR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
822	-	S822T	Si-npn	UHF, LN, 12V, 8mA, 30mW, B=40..150, 5.2GHz	SOT-143	24tc	-	5b	Vs
82P	-	BFP182T	Si-npn	UHF, 20V, 35mA, 250mW, B=50..200, >8GHz	SOT-143	24tc	-	5b	Tfk
82R	-	S886TR	MMIC	UHF, 16V, 30mA, 200mW, Idss=50..500µA	SOT-143R	26fm	A3	5c	Vs



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
83	-	AP8822N-53GI	Vdet-IC	5.3V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
83	-	AP8822N-53GS	Vdet-IC	5.3V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
83	-	AP8822N-53PI	Vdet-IC	5.3V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
83	-	AP8822N-53PS	Vdet-IC	5.3V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
83	-	XC6217D34ANR	LVR-IC	LDO, 3.45V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
83	-	XC6223A13BNR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
83P	-	BFP183T	Si-npn	UHF, 20V, 65mA, 450mW, B=50..200, 8GHz	SOT-143	24tc	-	5b	Tfk
84	-	AP8822N-54GI	Vdet-IC	5.4V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
84	-	AP8822N-54GS	Vdet-IC	5.4V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
84	-	AP8822N-54PI	Vdet-IC	5.4V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
84	-	AP8822N-54PS	Vdet-IC	5.4V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
84	-	XC6217D35ANR	LVR-IC	LDO, 3.55V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
84	-	XC6223A14BNR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
849	-	S849T	MMIC	UHF, 16V, 30mA, 200mW, Idss=50..500µA	SOT-143	24fd	A3	5c	Vs
85	-	AP8822N-55GI	Vdet-IC	5.5V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
85	-	AP8822N-55GS	Vdet-IC	5.5V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
85	-	AP8822N-55PI	Vdet-IC	5.5V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
85	-	AP8822N-55PS	Vdet-IC	5.5V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
85	-	XC6217D36ANR	LVR-IC	LDO, 3.65V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
85	-	XC6223A15BNR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
858	-	S858TA1	MMIC	UHF-Amplifier, 5V, Pq=5dBm(550MHz)	SOT-143	24am	A1	5b	Vs
86	-	AP8822N-56GI	Vdet-IC	5.6V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
86	-	AP8822N-56GS	Vdet-IC	5.6V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
86	-	AP8822N-56PI	Vdet-IC	5.6V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
86	-	AP8822N-56PS	Vdet-IC	5.6V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
86	-	XC6217D37ANR	LVR-IC	LDO, 3.75V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
86	-	XC6223A16BNR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
860	-	S860T	MMIC	UHF-Amplifier, 1.8V, Gp=8dB(2500MHz)	SOT-143	24am	A1	5b	Vs
868	-	S868T	MMIC	UHF-Amplifier, 5V, Pq=13dBm(550MHz)	SOT-143	24am	A1	5b	Vs
87	-	AP8822N-57GI	Vdet-IC	5.7V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
87	-	AP8822N-57GS	Vdet-IC	5.7V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
87	-	AP8822N-57PI	Vdet-IC	5.7V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
87	-	AP8822N-57PS	Vdet-IC	5.7V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
87	-	XC6217D38ANR	LVR-IC	LDO, 3.85V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
87	-	XC6223A17BNR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
88	-	AP8822N-58GI	Vdet-IC	5.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
88	-	AP8822N-58GS	Vdet-IC	5.8V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
88	-	AP8822N-58PI	Vdet-IC	5.8V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
88	-	AP8822N-58PS	Vdet-IC	5.8V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
88	-	XC6217D39ANR	LVR-IC	LDO, 3.95V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
88	-	XC6223A18BNR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
888	-	S888T	n-MOSFET	Dual gate, UHF, 10V, 20mA, 160mW, Idss=1..12mA	SOT-143	24fd	-	5b	Vs
89	-	AP8822N-59GI	Vdet-IC	5.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
89	-	AP8822N-59GS	Vdet-IC	5.9V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
89	-	AP8822N-59PI	Vdet-IC	5.9V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
89	-	AP8822N-59PS	Vdet-IC	5.9V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
89	-	XC6217D402NR	LVR-IC	LDO, 4.0V±2%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
89	-	XC6221B40BNR	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
89	-	XC6223A19BNR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
897	-	S897T	Si-npn	UHF, 15V, 60mA, 200mW, 5GHz	SOT-143	24t1	-	5b	Vs
8A	-	R3132Q40EC	Vdet-IC	4V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8A	-	RQ5RW30BA	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
8A	-	XC6127C15DNR	Vdet-IC	1.5V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8A	-	XC6127N15JNR	Vdet-IC	1.5V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8A	-	XC6223A20BNR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8A	-	XC6501A421NR-G	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8AL	-	STM811L	Vdet-IC	4.63V±2%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Ste
8AM	-	STM811M	Vdet-IC	4.38V±2%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Ste
8AN	-	STM811T	Vdet-IC	3.08V±2%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Ste
8AP	-	STM811S	Vdet-IC	2.93V±2%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Ste
8AQ	-	STM811R	Vdet-IC	2.63V±2%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Ste
8AR	-	STM812L	Vdet-IC	4.63V±2%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Ste
8AS	-	STM812M	Vdet-IC	4.38V±2%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Ste
8AT	-	STM812T	Vdet-IC	3.08V±2%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Ste
8AU	-	STM812S	Vdet-IC	2.93V±2%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Ste
8AV	-	STM812R	Vdet-IC	2.63V±2%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Ste
8B	-	R3132Q41EC	Vdet-IC	4.1V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8B	-	RQ5RW31BA	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
8B	-	XC6127C17DNR	Vdet-IC	1.7V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8B	-	XC6127N17JNR	Vdet-IC	1.7V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8B	-	XC6223A21BNR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8B	-	XC6501A42ANR-G	LVR-IC	LDO, 4.25V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8C	-	R3132Q42EC	Vdet-IC	4.2V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8C	-	RQ5RW32BA	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
8C	-	XC6127C19DNR	Vdet-IC	1.9V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8C	-	XC6127N19JNR	Vdet-IC	1.9V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8C	-	XC6223A22BNR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8C	-	XC6501A431NR-G	LVR-IC	LDO, 4.3V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8D	-	R3132Q43EC	Vdet-IC	4.3V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8D	-	RQ5RW33BA	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
8D	-	XC6127C21DNR	Vdet-IC	2.1V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8D	-	XC6127N21JNR	Vdet-IC	2.1V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8D	-	XC6223A23BNR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8D	-	XC6501A43ANR-G	LVR-IC	LDO, 4.35V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8E	-	R3132Q44EC	Vdet-IC	4.4V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8E	-	RQ5RW34BA	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
8E	-	XC6127C23DNR	Vdet-IC	2.3V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8E	-	XC6127N23JNR	Vdet-IC	2.3V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8E	-	XC6223A24BNR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8E	-	XC6501A441NR-G	LVR-IC	LDO, 4.4V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8F	-	R3132Q45EC	Vdet-IC	4.5V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8F	-	RQ5RW35BA	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
8F	-	XC6127C25DNR	Vdet-IC	2.5V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8F	-	XC6127N25JNR	Vdet-IC	2.5V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8F	-	XC6223A25BNR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8F	-	XC6501A44ANR-G	LVR-IC	LDO, 4.45V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8G	-	R3132Q46EC	Vdet-IC	4.6V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8G	-	RQ5RW36BA	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
8H	-	R3132Q47EC	Vdet-IC	4.7V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8H	-	RQ5RW37BA	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
8H	-	XC6127C27DNR	Vdet-IC	2.7V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8H	-	XC6127N27JNR	Vdet-IC	2.7V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8H	-	XC6223A26BNR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8H	-	XC6501A451NR-G	LVR-IC	LDO, 4.5V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8J	-	R3132Q48EC	Vdet-IC	4.8V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8J	-	RQ5RW38BA	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
8K	-	R3132Q49EC	Vdet-IC	4.9V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8K	-	RQ5RW39BA	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
8K	-	XC6127C29DNR	Vdet-IC	2.9V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8K	-	XC6127N29JNR	Vdet-IC	2.9V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8K	-	XC6223A27BNR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8K	-	XC6501A45ANR-G	LVR-IC	LDO, 4.55V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8L	-	R3133Q40EC	Vdet-IC	4V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8L	-	XC6127C31DNR	Vdet-IC	3.1V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8L	-	XC6127N31JNR	Vdet-IC	3.1V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8L	-	XC6223A28BNR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8L	-	XC6501A461NR-G	LVR-IC	LDO, 4.6V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8M	-	R3133Q41EC	Vdet-IC	4.1V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8M	-	XC6127C33DNR	Vdet-IC	3.3V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8M	-	XC6127N33JNR	Vdet-IC	3.3V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8M	-	XC6223A29BNR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8M	-	XC6501A46ANR-G	LVR-IC	LDO, 4.65V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8N	-	R3133Q42EC	Vdet-IC	4.2V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8N	-	XC6127C35DNR	Vdet-IC	3.5V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8N	-	XC6127N35JNR	Vdet-IC	3.5V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8N	-	XC6223A30BNR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8N	-	XC6501A471NR-G	LVR-IC	LDO, 4.7V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8P	-	R3133Q43EC	Vdet-IC	4.3V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8P	-	XC6127C37DNR	Vdet-IC	3.7V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8P	-	XC6127N37JNR	Vdet-IC	3.7V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8P	-	XC6223A31BNR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8P	-	XC6501A47ANR-G	LVR-IC	LDO, 4.75V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8Q	-	R3133Q44EC	Vdet-IC	4.4V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8R	-	R3133Q45EC	Vdet-IC	4.5V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8R	-	XC6127C39DNR	Vdet-IC	3.9V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8R	-	XC6127N39JNR	Vdet-IC	3.9V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8R	-	XC6223A32BNR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8R	-	XC6501A481NR-G	LVR-IC	LDO, 4.8V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8S	-	R3133Q46EC	Vdet-IC	4.6V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8S	-	XC6127C41DNR	Vdet-IC	4.1V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8S	-	XC6127N41JNR	Vdet-IC	4.1V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8S	-	XC6223A33BNR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8S	-	XC6501A48ANR-G	LVR-IC	LDO, 4.85V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8T	-	R3133Q47EC	Vdet-IC	4.7V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8T	-	XC6127C43DNR	Vdet-IC	4.3V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8T	-	XC6127N43JNR	Vdet-IC	4.3V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8T	-	XC6223A34BNR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8T	-	XC6501A491NR-G	LVR-IC	LDO, 4.9V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8U	-	R3133Q48EC	Vdet-IC	4.8V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8U	-	XC6127C45DNR	Vdet-IC	4.5V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8U	-	XC6127N45JNR	Vdet-IC	4.5V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8U	-	XC6223A35BNR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8U	-	XC6501A49ANR-G	LVR-IC	LDO, 4.95V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8V	-	R3133Q49EC	Vdet-IC	4.9V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
8V	-	XC6127C47DNR	Vdet-IC	4.7V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8V	-	XC6127N47JNR	Vdet-IC	4.7V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8V	-	XC6223A36BNR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8V	-	XC6501A501NR-G	LVR-IC	LDO, 5.0V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8X	-	XC6127C49DNR	Vdet-IC	4.9V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8X	-	XC6127N49JNR	Vdet-IC	4.9V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8X	-	XC6221B41BNR	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
8X	-	XC6223A37BNR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8Y	-	XC6127C51DNR	Vdet-IC	5.1V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8Y	-	XC6127N51JNR	Vdet-IC	5.1V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8Y	-	XC6221B42BNR	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
8Y	-	XC6223A38BNR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
8Z	-	XC6127C53DNR	Vdet-IC	5.3V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
8Z	-	XC6127N53JNR	Vdet-IC	5.3V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
8Z	-	XC6221B43BNR	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
8Z	-	XC6223A39BNR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9	gc	ELM7551NCB	Vdet-IC	5.1V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
9	gd	ELM7551CCB	Vdet-IC	5.1V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
90	-	AP8822N-60GI	Vdet-IC	6.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82	26vdl	VD6	5ga	Anw
90	-	AP8822N-60GS	Vdet-IC	6.0V±2%, -Reset ODO, 200ms, Halogen-fre	SC-82S	90vdl	VD6	5ga	Anw
90	-	AP8822N-60PI	Vdet-IC	6.0V±2%, -Reset ODO, 200ms	SC-82	26vdl	VD6	5g	Anw
90	-	AP8822N-60PS	Vdet-IC	6.0V±2%, -Reset ODO, 200ms	SC-82S	90vdl	VD6	5g	Anw
90	-	XC6127C55ENR	Vdet-IC	5.5V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
90	-	XC6127N55KNR	Vdet-IC	5.5V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
90	-	XC6225A44ANR-G	LVR-IC	LDO, 4.45V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
91	-	XC6225A452NR-G	LVR-IC	LDO, 4.5V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
913	-	S913T	MMIC	UHF, 12V, 30mA, 200mW, Idss=50..500µA	SOT-143	24fd	A3	5c	Vs
918	-	S918T	MMIC	UHF, 16V, 30mA, 200mW, Idss=50..500µA	SOT-143	24fd	A3	5c	Vs
92	-	XC6223B12BNR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
92	-	XC6225A45ANR-G	LVR-IC	LDO, 4.55V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
93	-	XC6223B13BNR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
93	-	XC6225A462NR-G	LVR-IC	LDO, 4.6V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
93R	-	S593TR	MMIC	UHF, 8V, 30mA, 200mW, Idss=50..500µA	SOT-143R	26fm	A3	5c	Vs
94	-	XC6223B14BNR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
94	-	XC6225A46ANR-G	LVR-IC	LDO, 4.65V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
949	-	S949T	MMIC	UHF, 12V, 30mA, 200mW, Idss=50..500µA	SOT-143	24fd	A3	5c	Vs
94R	-	S594TR	MMIC	UHF, 8V, 20mA, 160mW, Idss=50..500µA	SOT-143R	26fm	A3	5c	Vs
95	-	AP6209-12GS	LVR-IC	LDO, 1.2V±2%, 250mA, +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
95	-	AP6209-12PS	LVR-IC	LDO, 1.2V±2%, 250mA, +CE	SC-82	26vn	VR4	5g	Anw
95	-	XC6223B15BNR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
95	-	XC6225A472NR-G	LVR-IC	LDO, 4.7V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
96	-	XC6223B16BNR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
96	-	XC6225A47ANR-G	LVR-IC	LDO, 4.75V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
97	-	XC6221A081NR	LVR-IC	LDO, 0.8V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
97	-	XC6223B17BNR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
97p	-	BCV65	Si-n/p	Dual, 30V, 100mA, 250mW, B=75..800	SOT-143	24tt	T27a	5c	Phi
98	-	AP6209-15GS	LVR-IC	LDO, 1.5V±2%, 250mA, +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
98	-	AP6209-15PS	LVR-IC	LDO, 1.5V±2%, 250mA, +CE	SC-82	26vn	VR4	5g	Anw
98	-	XC6221A091NR	LVR-IC	LDO, 0.9V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
98	-	XC6223B18BNR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
982	-	S886T	MMIC	UHF, 16V, 30mA, 200mW, Idss=50..500µA	SOT-143	24fd	A3	5c	Vs
98p	-	BCV65B	Si-n/p	Dual, 30V, 100mA, 250mW, B=75..800	SOT-143	24tt	T27a	5c	Phi
99	-	XC6221A101NR	LVR-IC	LDO, 1.0V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
99	-	XC6223B19BNR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
99R	-	S949TR	MMIC	UHF, 12V, 30mA, 200mW, Idss=50..500µA	SOT-143R	26fm	A3	5c	Vs
9A	-	AP6209-18GS	LVR-IC	LDO, 1.8V±2%, 250mA, +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9A	-	AP6209-18PS	LVR-IC	LDO, 1.8V±2%, 250mA, +CE	SC-82	26vn	VR4	5g	Anw
9A	-	R3132Q50EC	Vdet-IC	5V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
9A	-	RQ5RW40BA	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
9A	-	XC6127C15ENR	Vdet-IC	1.5V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9A	-	XC6127N15KNR	Vdet-IC	1.5V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9A	-	XC6221A111NR	LVR-IC	LDO, 1.1V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9A	-	XC6223B20BNR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9B	-	AP6209-BBGS	LVR-IC	LDO, 1.85V±2%, 250mA, +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
9B	-	AP6209-BBPS	LVR-IC	LDO, 1.85V±2%, 250mA, +CE	SC-82	26vn	VR4	5g	Anw
9B	-	RQ5RW41BA	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
9B	-	XC6127C17ENR	Vdet-IC	1.7V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9B	-	XC6127N17KNR	Vdet-IC	1.7V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9B	-	XC6221A121NR	LVR-IC	LDO, 1.2V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9B	-	XC6223B21BNR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9C	-	RQ5RW42BA	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
9C	-	XC6127C19ENR	Vdet-IC	1.9V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9C	-	XC6127N19KNR	Vdet-IC	1.9V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9C	-	XC6221A131NR	LVR-IC	LDO, 1.3V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9C	-	XC6223B22BNR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9D	-	AP6209-20GS	LVR-IC	LDO, 2.0V±2%, 250mA, +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
9D	-	AP6209-20PS	LVR-IC	LDO, 2.0V±2%, 250mA, +CE	SC-82	26vn	VR4	5g	Anw
9D	-	RQ5RW43BA	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
9D	-	XC6127C21ENR	Vdet-IC	2.1V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9D	-	XC6127N21KNR	Vdet-IC	2.1V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9D	-	XC6221A141NR	LVR-IC	LDO, 1.4V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9D	-	XC6223B23BNR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9E	-	AP6209-22GS	LVR-IC	LDO, 2.2V±2%, 250mA, +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
9E	-	AP6209-22PS	LVR-IC	LDO, 2.2V±2%, 250mA, +CE	SC-82	26vn	VR4	5g	Anw
9E	-	RQ5RW44BA	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
9E	-	XC6127C23ENR	Vdet-IC	2.3V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9E	-	XC6127N23KNR	Vdet-IC	2.3V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9E	-	XC6221A151NR	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9E	-	XC6223B24BNR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9F	-	RQ5RW45BA	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
9F	-	XC6127C25ENR	Vdet-IC	2.5V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9F	-	XC6127N25KNR	Vdet-IC	2.5V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9F	-	XC6221A161NR	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9F	-	XC6223B25BNR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9G	-	AP6209-25GS	LVR-IC	LDO, 2.5V±2%, 250mA, +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
9G	-	AP6209-25PS	LVR-IC	LDO, 2.5V±2%, 250mA, +CE	SC-82	26vn	VR4	5g	Anw
9G	-	RQ5RW46BA	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
9H	-	RQ5RW47BA	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
9H	-	XC6127C27ENR	Vdet-IC	2.7V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9H	-	XC6127N27KNR	Vdet-IC	2.7V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9H	-	XC6221A171NR	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9H	-	XC6223B26BNR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9J	-	AP6209-27GS	LVR-IC	LDO, 2.7V±2%, 250mA, +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
9J	-	AP6209-27PS	LVR-IC	LDO, 2.7V±2%, 250mA, +CE	SC-82	26vn	VR4	5g	Anw
9J	-	RQ5RW48BA	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
9K	-	AP6209-28GS	LVR-IC	LDO, 2.8V±2%, 250mA, +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
9K	-	AP6209-28PS	LVR-IC	LDO, 2.8V±2%, 250mA, +CE	SC-82	26vn	VR4	5g	Anw
9K	-	RQ5RW49BA	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SC-82AB	26vp	VR4	5m	Ric
9K	-	XC6127C29ENR	Vdet-IC	2.9V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9K	-	XC6127N29KNR	Vdet-IC	2.9V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9K	-	XC6221A181NR	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9K	-	XC6223B27BNR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9L	-	R3133Q50EC	Vdet-IC	5V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
9L	-	XC6127C31ENR	Vdet-IC	3.1V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9L	-	XC6127N31KNR	Vdet-IC	3.1V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9L	-	XC6221A191NR	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9L	-	XC6223B28BNR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9LB	-	STM6315LB	Vdet-IC	4.63V±2%, 30ms, -Reset ODO	SOT-143	24vdh	VD6	5g	Ste
9M	-	AP6209-30GS	LVR-IC	LDO, 3.0V±2%, 250mA, +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
9M	-	AP6209-30PS	LVR-IC	LDO, 3.0V±2%, 250mA, +CE	SC-82	26vn	VR4	5g	Anw
9M	-	XC6127C33ENR	Vdet-IC	3.3V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9M	-	XC6127N33KNR	Vdet-IC	3.3V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9M	-	XC6221A201NR	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9M	-	XC6223B29BNR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9MD	-	STM6315MD	Vdet-IC	4.38V±2%, 210ms, -Reset ODO	SOT-143	24vdh	VD6	5g	Ste
9N	-	XC6127C35ENR	Vdet-IC	3.5V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9N	-	XC6127N35KNR	Vdet-IC	3.5V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9N	-	XC6221A211NR	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9N	-	XC6223B30BNR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9P	-	XC6127C37ENR	Vdet-IC	3.7V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9P	-	XC6127N37KNR	Vdet-IC	3.7V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9P	-	XC6221A221NR	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9P	-	XC6223B31BNR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9Q	-	AP6209-33GS	LVR-IC	LDO, 3.3V±2%, 250mA, +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
9Q	-	AP6209-33PS	LVR-IC	LDO, 3.3V±2%, 250mA, +CE	SC-82	26vn	VR4	5g	Anw
9R	-	XC6127C39ENR	Vdet-IC	3.9V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9R	-	XC6127N39KNR	Vdet-IC	3.9V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9R	-	XC6221A231NR	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9R	-	XC6223B32BNR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9RA	-	STM6315RA	Vdet-IC	2.63V±2%, 1.5ms, -Reset ODO	SOT-143	24vdh	VD6	5g	Ste
9RB	-	STM6315RB	Vdet-IC	2.63V±2%, 30ms, -Reset ODO	SOT-143	24vdh	VD6	5g	Ste
9RD	-	STM6315RD	Vdet-IC	2.63V±2%, 210ms, -Reset ODO	SOT-143	24vdh	VD6	5g	Ste
9RG	-	STM6315RG	Vdet-IC	2.63V±2%, 1680ms, -Reset ODO	SOT-143	24vdh	VD6	5g	Ste
9S	-	AP6209-42GS	LVR-IC	LDO, 4.2V±2%, 250mA, +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
9S	-	AP6209-42PS	LVR-IC	LDO, 4.2V±2%, 250mA, +CE	SC-82	26vn	VR4	5g	Anw
9S	-	XC6127C41ENR	Vdet-IC	4.1V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9S	-	XC6127N41KNR	Vdet-IC	4.1V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9S	-	XC6221A241NR	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9S	-	XC6223B33BNR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9SD	-	STM6315SD	Vdet-IC	2.93V±2%, 210ms, -Reset ODO	SOT-143	24vdh	VD6	5g	Ste
9T	-	AP6209-35GS	LVR-IC	LDO, 3.5V±2%, 250mA, +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
9T	-	AP6209-35PS	LVR-IC	LDO, 3.5V±2%, 250mA, +CE	SC-82	26vn	VR4	5g	Anw
9T	-	XC6127C43ENR	Vdet-IC	4.3V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9T	-	XC6127N43KNR	Vdet-IC	4.3V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9T	-	XC6221A251NR	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9T	-	XC6223B34BNR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9U	-	XC6127C45ENR	Vdet-IC	4.5V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9U	-	XC6127N45KNR	Vdet-IC	4.5V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9U	-	XC6221A261NR	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9U	-	XC6223B35BNR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9V	-	AP6209-36GS	LVR-IC	LDO, 3.6V±2%, 250mA, +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
9V	-	AP6209-36PS	LVR-IC	LDO, 3.6V±2%, 250mA, +CE	SC-82	26vn	VR4	5g	Anw
9V	-	XC6127C47ENR	Vdet-IC	4.7V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9V	-	XC6127N47KNR	Vdet-IC	4.7V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9V	-	XC6221A271NR	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9V	-	XC6223B36BNR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9X	-	XC6127C49ENR	Vdet-IC	4.9V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9X	-	XC6127N49KNR	Vdet-IC	4.9V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9X	-	XC6221A281NR	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9X	-	XC6223B37BNR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9Y	-	XC6127C51ENR	Vdet-IC	5.1V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9Y	-	XC6127N51KNR	Vdet-IC	5.1V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9Y	-	XC6221A291NR	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9Y	-	XC6223B38BNR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
9Z	-	AP6209-50GS	LVR-IC	LDO, 5.0V±2%, 250mA, +CE, Halogen-free	SC-82	26vn	VR4	5ga	Anw
9Z	-	AP6209-50PS	LVR-IC	LDO, 5.0V±2%, 250mA, +CE	SC-82	26vn	VR4	5g	Anw
9Z	-	XC6127C53ENR	Vdet-IC	5.3V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
9Z	-	XC6127N53KNR	Vdet-IC	5.3V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
9Z	-	XC6221A301NR	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
9Z	-	XC6223B39BNR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
A	-	3SK147	n-MESFET	GaAs Dual gate, UHF, 12V, 55mA, 150mW, 800MHz	SOT-143R	26fm	-	5b	Soy
A	-	3SK301	n-MOSFET	Dual gate, VHF-amp, 15V, ±30mA, 150mW, Idss=5..23mA	SOT-143	26fm	-	5b	Pan
A	-	3SK305	n-MOSFET	Dual gate, VHF-amp, 15V, ±30mA, 150mW, Idss=5..23mA	SOT-343	26fm	-	5b	Pan
A	-	XMFS2-M1	n-FET	GaAs, UHF, 6V, 100mA, 300mW, Idss=60mA(3V), 6GHz	SOT-143	23f3	-	5c	Mur
A	gc	ELM7522NCB	Vdet-IC	2.2V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
A	gd	ELM7522CCB	Vdet-IC	2.2V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
A0	-	R3114Q071A	Vdet-IC	0.7V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
A0	-	XC6127C55FNR	Vdet-IC	5.5V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
A0	-	XC6224A081NR	LVR-IC	LDO, 0.8V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
A0	-	XC6225B44ANR-G	LVR-IC	LDO, 4.45V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
A0-	-	RT9818E-23PY	Vdet-IC	2.3V±1.5%, +Reset ODO	SOT-343R	26ut	VD6	5b	Rct
A1	-	1SS272	Si-diode	Dual, Sw, Fast, 85V, 100mA, <2pf, <4ns	SOT-143	24dv	-	5b	Tos
A1	-	BGA2001	MMIC	RF amp, DC..1.88GHz, 19.5dB (50Ω), Vcc=4.5V	SOT-143	26aa	A1	5c	Phi
A1	-	R3114Q081A	Vdet-IC	0.8V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
A1	-	XC6224A091NR	LVR-IC	LDO, 0.9V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
A1	-	XC6225B452NR-G	LVR-IC	LDO, 4.5V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A1	-	XC6233H121NR-G	LVR-IC	LVO, 1.2V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
A1	ga	1SS382	Si-diode	Dual, Fast Sw, 85V, 100mA, 100mW, <4ns	SOT-343	26dv	-	5b	Tos
A1-	-	RT9198-18PY	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SOT-343R	26vn	VR4	5b	Rct
A2	-	CFY30	n-FET	GaAs, LN, UHF, 7V, 80mA, 250mW, 12GHz, 11.5dB	SOT-143	24fp	-	5h	Inf
A2	-	DWC010	Si-diode	Dual, Sw, Hi-sp, 200V, 100mA, Vf<1.2V(100mA), 60ns	CP4	26ce	-	5b	San
A2	-	R1180Q121B	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
A2	-	R3114Q091A	Vdet-IC	0.9V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
A2	-	XC6224A101NR	LVR-IC	LDO, 1.0V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
A2	-	XC6225B45ANR-G	LVR-IC	LDO, 4.55V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
A2	-	XC6233H131NR-G	LVR-IC	LVO, 1.3V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
A2-	-	RT9198-25PY	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-343R	26vn	VR4	5b	Rct
A3	-	1SS306	Si-diode	Dual, Sw, 250V, 100mA, <3pF, <60ns	SOT-143	24dv	-	5b	Tos
A3	-	BGA2003	MMIC	RF amp, DC..1.88GHz, 16dB (50Ω), Vcc=4.5V	SOT-143	26aa	A1	5c	Phi
A3	-	R1180Q131B	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
A3	-	R3114Q101A	Vdet-IC	1V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
A3	-	XC6224A111NR	LVR-IC	LDO, 1.1V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
A3	-	XC6225B462NR-G	LVR-IC	LDO, 4.6V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
A3	-	XC6233H141NR-G	LVR-IC	LVO, 1.4V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
A3-	-	RT9198-28PY	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SOT-343R	26vn	VR4	5b	Rct
A4	-	1SS319	Si-diode	Dual, Schottky, Sw, 45V, 100mA, Vf<0.6V(100mA)	SOT-143	24dv	-	5b	Tos
A4	-	R1180Q141B	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
A4	-	R3114Q111A	Vdet-IC	1.1V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
A4	-	XC6224A121NR	LVR-IC	LDO, 1.2V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
A4	-	XC6225B46ANR-G	LVR-IC	LDO, 4.65V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
A4	-	XC6233H151NR-G	LVR-IC	LVO, 1.5V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
A4	ga	1SS383	Si-diode	Dual, Schottky, 45V, 100mA, 100mW, <18pF	SC-61	24dv	-	5b	Tos
A4-	-	RT9198-30PY	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SOT-343R	26vn	VR4	5b	Rct
A5	-	1SS391	Si-diode	Dual, Schottky, 15V, 100mA	SOT-143	24dv	-	5b	Tos
A5	-	HSMS-2805	Si-diode	Dual, Schottky, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-143	24ce	-	5c	Agi
A5	-	R1140Q151B	LVR-IC	LDO, 1.5V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
A5	-	R1180Q151B	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
A5	-	R3114Q121A	Vdet-IC	1.2V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
A5	-	XC6224A131NR	LVR-IC	LDO, 1.3V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
A5	-	XC6225B472NR-G	LVR-IC	LDO, 4.7V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
A5	-	XC6233H161NR-G	LVR-IC	LVO, 1.6V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
A5	ga	1SS384	Si-diode	Dual, Schottky, 15V, 100mA, 100mW, <20pF	SOT-343	24dv	-	5b	Tos
A5-	-	RT9198-33PY	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-343R	26vn	VR4	5b	Rct
A6	-	1SS399	Si-diode	Dual, Rectifier, 420V, 100mA, 500ns	SOT-143	24dv	-	5b	Tos
A6	-	R1140Q161B	LVR-IC	LDO, 1.6V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
A6	-	R1180Q161B	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
A6	-	R3114Q131A	Vdet-IC	1.3V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
A6	-	XC6224A141NR	LVR-IC	LDO, 1.4V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
A6	-	XC6225B47ANR-G	LVR-IC	LDO, 4.75V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
A6	-	XC6233H171NR-G	LVR-IC	LVO, 1.7V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
A6-	-	RT9198-15PY	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SOT-343R	26vn	VR4	5b	Rct
A61	-	BAS28	Si-diode	Dual, Fast Sw, 75V, 250mA, Vf<1.25V(150mA), <6ns	SOT-143	24ce	-	5b	Cen
A7	-	1SS402	Si-diode	Dual, Schottky, 20V, 50mA	SOT-143	24dv	-	5b	Tos
A7	-	BFG310W/XR	Si-npn	UHF, 15V, 10mA, 60mW, B=60..200, 14GHz	SOT-343R	26tu	-	5b	Phi
A7	-	HSMS-2807	Si-diode	4x SBD, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-143	24	D1	5c	Agi
A7	-	R1140Q171B	LVR-IC	LDO, 1.7V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
A7	-	R1180Q171B	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
A7	-	R3114Q141A	Vdet-IC	1.4V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
A7	-	XC6221A08BNR	LVR-IC	LDO, 0.85V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
A7	-	XC6224A151NR	LVR-IC	LDO, 1.5V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
A7	-	XC6233H181NR-G	LVR-IC	LVO, 1.8V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
A7-	-	RT9818A-23PY	Vdet-IC	2.3V±1.5%, +Reset ODO	SOT-343R	26ut	VD6	5b	Rct
A7p	-	BFG310W/XR	Si-npn	UHF, 15V, 10mA, 60mW, B=60..200, 14GHz	SOT-343R	26tu	-	5b	PhH
A7W	-	BFG310W/XR	Si-npn	UHF, 15V, 10mA, 60mW, B=60..200, 14GHz	SOT-343R	26tu	-	5b	PhC
A8	-	AP8821C-08GI	Vdet-IC	0.8V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
A8	-	AP8821C-08GS	Vdet-IC	0.8V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
A8	-	AP8821C-08PI	Vdet-IC	0.8V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
A8	-	AP8821C-08PS	Vdet-IC	0.8V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
A8	-	HSMS-2808	Si-diode	4x SBD, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-143	24	D2	5c	Agi
A8	-	R1140Q181B	LVR-IC	LDO, 1.8V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
A8	-	R1180Q181B	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
A8	-	R3114Q151A	Vdet-IC	1.5V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
A8	-	XC61CC0802N	Vdet-IC	0.8V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
A8	-	XC6221A09BNR	LVR-IC	LDO, 0.95V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
A8	-	XC6224A161NR	LVR-IC	LDO, 1.6V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
A8	-	XC6233H191NR-G	LVR-IC	LVO, 1.9V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A8-	-	RT9818E-21PY	Vdet-IC	2.1V±1.5%, +Reset ODO	SOT-343R	26ut	VD6	5b	Rct
A83	-	SGA-8343	SiGe-npn	UHF-amp, LN, 12V, 72mA, 350mW, B=120..300, 6GHz	SOT-343	26t1	-	5b	Sir
A83Z	-	SGA-8343Z	SiGe-npn	UHF-amp, LN, 12V, 72mA, 350mW, B=120..300, 6GHz	SOT-143	26t1	-	5b	Sir
a85	-	LN3526C0812M	Vdet-IC	0.8V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
a86	-	LN3526C0842M	Vdet-IC	0.8V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
a87	-	LN3526C0852M	Vdet-IC	0.8V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
A9	-	AP8821C-09GI	Vdet-IC	0.9V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
A9	-	AP8821C-09GS	Vdet-IC	0.9V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
A9	-	AP8821C-09PI	Vdet-IC	0.9V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
A9	-	AP8821C-09PS	Vdet-IC	0.9V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
A9	-	R1140Q191B	LVR-IC	LDO, 1.9V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
A9	-	R1180Q191B	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
A9	-	R3114Q161A	Vdet-IC	1.6V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
A9	-	XC61CC0902N	Vdet-IC	0.9V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
A9	-	XC6221A10BNR	LVR-IC	LDO, 1.05V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
A9	-	XC6224A171NR	LVR-IC	LDO, 1.7V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
A9	-	XC6233H201NR-G	LVR-IC	LVO, 2.0V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
A9-	-	RT9818E-22PY	Vdet-IC	2.2V±1.5%, +Reset ODO	SOT-343R	26ut	VD6	5b	Rct
a95	-	LN3526C0912M	Vdet-IC	0.9V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
a96	-	LN3526C0942M	Vdet-IC	0.9V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
a97	-	LN3526C0952M	Vdet-IC	0.9V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
AA	-	MAX6314US50D1-T	Vdet-IC	5.0V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
AA	-	RP130Q121A	LVR-IC	LDO, LN, -CE, 1.2V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
AA	-	XC6127C15FNR	Vdet-IC	1.5V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AA	-	XC6127N16ANR	Vdet-IC	1.6V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AA	-	XC6221A11BNR	LVR-IC	LDO, 1.15V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AA	-	XC6224A181NR	LVR-IC	LDO, 1.8V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AA-	-	RT9818E-24PY	Vdet-IC	2.4V±1.5%, +Reset ODO	SOT-343R	26ut	VD6	5b	Rct
AAC	-	PAM3101FUK150	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SC-70-4L	24vn	VR4	5d	Pam
AAE	-	PAM3101FUK180	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SC-70-4L	24vn	VR4	5d	Pam
AAG	-	PAM3101FUK250	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SC-70-4L	24vn	VR4	5d	Pam
AAH	-	PAM3101FUK280	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SC-70-4L	24vn	VR4	5d	Pam
AAI	-	PAM3101FUK285	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SC-70-4L	24vn	VR4	5d	Pam
AAJ	-	PAM3101FUK300	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SC-70-4L	24vn	VR4	5d	Pam
AAK	-	PAM3101FUK330	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SC-70-4L	24vn	VR4	5d	Pam
AAM	-	PAM3101FUK400	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SC-70-4L	24vn	VR4	5d	Pam
AAO	-	PAM3101FUK380	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SC-70-4L	24vn	VR4	5d	Pam
AAP	-	PAM3101FUK310	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SC-70-4L	24vn	VR4	5d	Pam
AAQ	-	PAM3101FUK290	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SC-70-4L	24vn	VR4	5d	Pam
AAs	-	BAR80	Si-diode	Triple, RF, Shunt, 35V, 100mA, Vf<1V(100mA), 0.6pF	MW-4	25cd	-	5c	Inf
AAT	-	PAM3101FUK475	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	SC-70-4L	24vn	VR4	5d	Pam
AB	-	MAX6314US49D1-T	Vdet-IC	4.9V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
AB	-	RP130Q131A	LVR-IC	LDO, LN, -CE, 1.3V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
AB	-	XC6127C17FNR	Vdet-IC	1.7V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AB	-	XC6127N18ANR	Vdet-IC	1.8V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AB	-	XC6221A12BNR	LVR-IC	LDO, 1.25V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AB	-	XC6224A191NR	LVR-IC	LDO, 1.9V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AB-	-	RT9818E-40PY	Vdet-IC	4.0V±1.5%, +Reset ODO	SOT-343R	26ut	VD6	5b	Rct
AC	-	MAX6314US48D1-T	Vdet-IC	4.8V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
AC	-	MT4S06	Si-npn	VHF/UHF, 10V, 15mA, 10GHz	SOT-143	26tu	-	5b	Tos
AC	-	RP130Q141A	LVR-IC	LDO, LN, -CE, 1.4V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
AC	-	XC6127C19FNR	Vdet-IC	1.9V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AC	-	XC6127N20ANR	Vdet-IC	2.0V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AC	-	XC6221A13BNR	LVR-IC	LDO, 1.35V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AC	-	XC6224A201NR	LVR-IC	LDO, 2.0V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AC-	-	RT9198A-42PY	LVR-IC	LDO, 4.2V±1%, 300mA, -CE	SOT-343R	26vn	VR4	5b	Rct
AD	-	MAX6314US47D1-T	Vdet-IC	4.7V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
AD	-	RP130Q151A	LVR-IC	LDO, LN, -CE, 1.5V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
AD	-	XC6127C21FNR	Vdet-IC	2.1V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AD	-	XC6127N22ANR	Vdet-IC	2.2V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AD	-	XC6221A14BNR	LVR-IC	LDO, 1.45V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AD	-	XC6223D301NR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
AD-	-	RT9818A-36PY	Vdet-IC	3.6V±1.5%, +Reset ODO	SOT-343R	26ut	VD6	5b	Rct
AD=	-	RT9818A-36GY	Vdet-IC	3.6V±1.5%, +Reset ODO	SOT-343R	26ut	VD6	5c	Rct
AE	-	1SS383	Si-diode	Dual, Schottky, 40V, 300mA, 100mW, <25pF	SOT-343	24dv	-	5c	Ons
AE	-	3SK219	n-MOSFET	Dual gate, VHF-amp, 15V, ±30mA, 150mW, Idss=0..8mA	SOT-143	26fm	-	5b	Pan
AE	-	3SK268	n-MOSFET	Dual gate, VHF-amp, 15V, ±30mA, 150mW, Idss=0..8mA	SOT-343	26fm	-	5b	Pan
AE	-	MAX6314US46D1-T	Vdet-IC	4.63V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
AE	-	MT4S04A	Si-npn	VHF/UHF, 10V, 40mA, 7GHz	SOT-143	26tu	-	5b	Tos
AE	-	RP130Q161A	LVR-IC	LDO, LN, -CE, 1.6V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AE	-	XC6127C23FNR	Vdet-IC	2.3V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AE	-	XC6127N24ANR	Vdet-IC	2.4V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AE	-	XC6221A15BNR	LVR-IC	LDO, 1.55V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AE	-	XC6223D311NR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
AE-	-	RT9816A-18PY	Vdet-IC	1.8V±1.5%, -Reset ODO, -MR	SC-82	26vdh	VD4	5b	Rct
AF	-	3SK220	n-MOSFET	Dual gate, VHF/UHF, 15V, 30mA	SOT-143	26fm	-	5c	Pan
AF	-	3SK270	n-MOSFET	Dual gate, VHF/UHF-amp, 15V, ±30mA, 150mW, Idss=12..22mA	SOT-343	26fm	-	5b	Pan
AF	-	MAX6314US45D1-T	Vdet-IC	4.5V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
AF	-	R1141Q151B	LVR-IC	LDO, 1.5V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
AF	-	RP130Q171A	LVR-IC	LDO, LN, -CE, 1.7V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
AF	-	XC6127C25FNR	Vdet-IC	2.5V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AF	-	XC6127N26ANR	Vdet-IC	2.6V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AF	-	XC6221A16BNR	LVR-IC	LDO, 1.65V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AF	-	XC6223D321NR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
AF-	-	RT9816A-20PY	Vdet-IC	2.0V±1.5%, -Reset ODO, -MR	SC-82	26vdh	VD4	5b	Rct
AF-	-	RT9816D-31PY	Vdet-IC	3.1V±1.5%, 450ms, -Reset ODO, -MR	SC-82	26vdh	VD4	5b	Rct
AG	-	MAX6314US44D1-T	Vdet-IC	4.39V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
AG	-	R1141Q161B	LVR-IC	LDO, 1.6V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
AG	-	RP130Q181A	LVR-IC	LDO, LN, -CE, 1.8V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
AGB	-	MAX6468XS46D3	Vdet-IC	4.6V±1.5%, -MR, Reset PPO	SC-70-4	23vdh	VD5	5c	Max
AGC	-	MAX6468XS29D3	Vdet-IC	2.9V±1.5%, -MR, Reset PPO	SC-70-4	23vdh	VD5	5c	Max
AGL	-	MAX6467XS16D3	Vdet-IC	1.6V±1.5%, -MR, Reset ODO	SC-70-4	23vdh	VD4	5c	Max
AGM	-	MAX6467XS22D3	Vdet-IC	2.2V±1.5%, -MR, Reset ODO	SC-70-4	23vdh	VD4	5c	Max
AGN	-	MAX6467XS26D3	Vdet-IC	2.6V±1.5%, -MR, Reset ODO	SC-70-4	23vdh	VD4	5c	Max
AGO	-	MAX6467XS29D3	Vdet-IC	2.9V±1.5%, -MR, Reset ODO	SC-70-4	23vdh	VD4	5c	Max
AGP	-	MAX6467XS46D3	Vdet-IC	4.6V±1.5%, -MR, Reset ODO	SC-70-4	23vdh	VD4	5c	Max
AGQ	-	MAX6468XS16D3	Vdet-IC	1.6V±1.5%, -MR, Reset PPO	SC-70-4	23vdh	VD5	5c	Max
AGR	-	MAX6468XS22D3	Vdet-IC	2.2V±1.5%, -MR, Reset PPO	SC-70-4	23vdh	VD5	5c	Max
AGS	-	MAX6468XS26D3	Vdet-IC	2.6V±1.5%, -MR, Reset PPO	SC-70-4	23vdh	VD5	5c	Max
AH	-	MAX6314US43D1-T	Vdet-IC	4.3V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
AH	-	R1141Q171B	LVR-IC	LDO, 1.7V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
AH	-	RP130Q181A5	LVR-IC	LDO, LN, -CE, 1.85V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
AH	-	XC6127C27FNR	Vdet-IC	2.7V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AH	-	XC6127N28ANR	Vdet-IC	2.8V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AH	-	XC6221A17BNR	LVR-IC	LDO, 1.75V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AH	-	XC6223D331NR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
AI	-	MAX6314US42D1-T	Vdet-IC	4.2V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
AJ	-	MAX6314US41D1-T	Vdet-IC	4.1V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
AJ	-	R1141Q181B	LVR-IC	LDO, 1.8V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
AJ	-	RP130Q191A	LVR-IC	LDO, LN, -CE, 1.9V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
AJ-	-	RT9818C-14PY	Vdet-IC	1.4V±1.5%, +Reset ODO, Td=220ms	SOT-343R	26ut	VD6	5b	Rct
AK	-	MAX6314US40D1-T	Vdet-IC	4.0V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
AK	-	R1141Q191B	LVR-IC	LDO, 1.9V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
AK	-	R3112Q091A	Vdet-IC	0.91V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
AK	-	RP130Q201A	LVR-IC	LDO, LN, -CE, 2V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
AK	-	XC6127C29FNR	Vdet-IC	2.9V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AK	-	XC6127N30ANR	Vdet-IC	3.0V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AK	-	XC6221A18BNR	LVR-IC	LDO, 1.85V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AK	-	XC6223D341NR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
AK-	-	RT9198-31PY	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SOT-343R	26vn	VR4	5b	Rct
AK=	-	RT9198-31GY	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SOT-343R	26vn	VR4	5b	Rct
AL	-	MAX6314US39D1-T	Vdet-IC	3.9V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
AL	-	XC6127C31FNR	Vdet-IC	3.1V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AL	-	XC6127N32ANR	Vdet-IC	3.2V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AL	-	XC6221A19BNR	LVR-IC	LDO, 1.95V±20mV, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AL	-	XC6223D351NR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
AL-	-	RT9198-32PY	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SOT-343R	26vn	VR4	5b	Rct
AM	-	IMP811LEUS-T	Vdet-IC	4.63V±2%,MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Imp
AM	-	MAX811LUS	Vdet-IC	4.63V±1.5%, -MR, -Reset PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
AM	-	XC6127C33FNR	Vdet-IC	3.3V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AM	-	XC6127N34ANR	Vdet-IC	3.4V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AM	-	XC6221A20BNR	LVR-IC	LDO, 2.05V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AM	-	XC6223D361NR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
AM-	-	RT9198-34PY	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	SOT-343R	26vn	VR4	5b	Rct
AN	-	IMP811MEUS-T	Vdet-IC	4.38V±2%,MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Imp
AN	-	MAX811MUS	Vdet-IC	4.38V±1.5%, -MR, -Reset PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
AN	-	XC6127C35FNR	Vdet-IC	3.5V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AN	-	XC6127N36ANR	Vdet-IC	3.6V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AN	-	XC6221A21BNR	LVR-IC	LDO, 2.15V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AN	-	XC6224A211NR	LVR-IC	LDO, 2.1V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AN-	-	RT9198-35PY	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	SOT-343R	26vn	VR4	5b	Rct
ANs	-	BFP450	Si-npn	UHF, 15V, 100mA, 450mW, B=50..150, 24GHz	SOT-343	24t1	-	5b	Inf
AO	-	IMP811JEUS-T	Vdet-IC	4V±2%,MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Imp
AO	-	PT7M7811LTB	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
AO	gh	PT7M7811LTBE	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR, Lead free	SOT-143	24vdh	VD5	5g	Pti
AP	-	IMP811TEUS-T	Vdet-IC	3.08V±2%,MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Imp
AP	-	MAX811TUS	Vdet-IC	3.08V±1.5%, -MR, -Reset PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
AP	-	PT7M7811MTB	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
AP	-	XC6127C37FNR	Vdet-IC	3.7V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AP	-	XC6127N38ANR	Vdet-IC	3.8V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AP	-	XC6221A22BNR	LVR-IC	LDO, 2.25V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AP	-	XC6223D371NR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
AP	gh	PT7M7811MTBE	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR, Lead free	SOT-143	24vdh	VD5	5g	Pti
AP-	-	RT9198-44PY	LVR-IC	LDO, 4.4V±1%, 300mA, +CE	SOT-343R	26vn	VR4	5b	Rct
APs	-	BFP520	Si-npn	UHF, 12V, 40mA, 45GHz	SOT-343	24t1	-	5b	Sie
AQ	-	IMP811SEUS-T	Vdet-IC	2.93V±2%,MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Imp
AQ	-	MAX811SUS	Vdet-IC	2.93V±1.5%, -MR, -Reset PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
AQ	-	PT7M7811TTB	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
AQ	gh	PT7M7811TTBE	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR, Lead free	SOT-143	24vdh	VD5	5g	Pti
AQ-	-	RT9818A-27PY	Vdet-IC	2.7V±1.5%, +Reset ODO	SOT-343R	26ut	VD6	5b	Rct
AR	-	IMP811REUS-T	Vdet-IC	2.63V±2%,MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Imp
AR	-	MAX811RUS	Vdet-IC	2.63V±1.5%, -MR, -Reset PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
AR	-	PT7M7811STB	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
AR	-	XC6127C39FNR	Vdet-IC	3.9V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AR	-	XC6127N40ANR	Vdet-IC	4.0V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AR	-	XC6221A23BNR	LVR-IC	LDO, 2.35V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AR	-	XC6223D381NR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
AR	gh	PT7M7811STBE	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR, Lead free	SOT-143	24vdh	VD5	5g	Pti
AR-	-	RT9818A-13PY	Vdet-IC	1.3V±1.5%, +Reset ODO	SOT-343R	26ut	VD6	5b	Rct
AS	-	IMP812LEUS-T	Vdet-IC	4.63V±2%,MR, +Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Imp
AS	-	MAX812LUS	Vdet-IC	4.63V±1.5%, -MR, +Reset PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
AS	-	PT7M7811RTB	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
AS	-	XC6127C41FNR	Vdet-IC	4.1V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AS	-	XC6127N42ANR	Vdet-IC	4.2V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AS	-	XC6221A24BNR	LVR-IC	LDO, 2.45V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AS	-	XC6223D391NR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
AS	gh	PT7M7811RTBE	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR, Lead free	SOT-143	24vdh	VD5	5g	Pti
AS-	-	RT9819E-43PY	Vdet-IC	4.3V±1.5%, +Reset PPO	SOT-343R	26ut	VD7	5b	Rct
AT	-	IMP812MEUS-T	Vdet-IC	4.38V±2%,MR, +Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Imp
AT	-	MAX812MUS	Vdet-IC	4.38V±1.5%, -MR, +Reset PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
AT	-	PT7M7811ZTB	Vdet-IC	2.32V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
AT	-	XC6127C43FNR	Vdet-IC	4.3V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AT	-	XC6127N44ANR	Vdet-IC	4.4V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AT	-	XC6221A25BNR	LVR-IC	LDO, 2.55V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AT	-	XC6223D401NR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
AT	gh	PT7M7811ZTBE	Vdet-IC	2.32V±1.5%, -Reset PPO, -MR, Lead free	SOT-143	24vdh	VD5	5g	Pti
AT-	-	RT9198A-44PY	LVR-IC	LDO, 4.4V±1%, 300mA, -CE	SOT-343R	26vn	VR4	5c	Rct
AT=	-	RT9198A-44GY	LVR-IC	LDO, 4.4V±1%, 300mA, -CE	SOT-343R	26vn	VR4	5c	Rct
AU	-	IMP812JEUS-T	Vdet-IC	4.0V±2%,MR, +Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Imp
AU	-	PT7M7811YTB	Vdet-IC	2.20V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
AU	-	XC6127C45FNR	Vdet-IC	4.5V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AU	-	XC6127N46ANR	Vdet-IC	4.6V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AU	-	XC6221A26BNR	LVR-IC	LDO, 2.65V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AU	-	XC6224A221NR	LVR-IC	LDO, 2.2V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AU	gh	PT7M7811YTBE	Vdet-IC	2.20V±1.5%, -Reset PPO, -MR, Lead free	SOT-143	24vdh	VD5	5g	Pti
AU-	-	RT9818C-26PY	Vdet-IC	2.6V±1.5%, +Reset ODO, Td=220ms	SOT-343R	26ut	VD6	5b	Rct
AV	-	IMP812TEUS-T	Vdet-IC	3.08V±2%,MR, +Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Imp
AV	-	MAX812TUS	Vdet-IC	3.08V±1.5%, -MR, +Reset PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
AV	-	PT7M7812LTB	Vdet-IC	4.63V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
AV	-	R3112Q091C	Vdet-IC	0.91V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
AV	-	XC6127C47FNR	Vdet-IC	4.7V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AV	-	XC6127N48ANR	Vdet-IC	4.8V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AV	-	XC6221A27BNR	LVR-IC	LDO, 2.75V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AV	-	XC6224A231NR	LVR-IC	LDO, 2.3V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AV	gh	PT7M7812LTBE	Vdet-IC	4.63V±1.5%, +Reset PPO, -MR, Lead free	SOT-143	24vdh	VD5	5g	Pti
AW	-	IMP812SEUS-T	Vdet-IC	2.93V±2%,MR, +Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Imp
AW	-	MAX812SUS	Vdet-IC	2.93V±1.5%, -MR, +Reset PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
AW	-	PT7M7812MTB	Vdet-IC	4.38V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
AW	gh	PT7M7812MTBE	Vdet-IC	4.38V±1.5%, +Reset PPO, -MR, Lead free	SOT-143	24vdh	VD5	5g	Pti
AW-	-	RT9818E-25PY	Vdet-IC	2.5V±1.5%, +Reset ODO	SOT-343R	26ut	VD6	5b	Rct



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AX	-	IMP812REUS-T	Vdet-IC	2.63V±2%,MR, +Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Imp
AX	-	MAX812RUS	Vdet-IC	2.63V±1.5%, -MR, +Reset PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
AX	-	PT7M7812TTB	Vdet-IC	3.08V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
AX	-	XC6127C49FNR	Vdet-IC	4.9V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AX	-	XC6127N50ANR	Vdet-IC	5.0V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AX	-	XC6221A28BNR	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AX	-	XC6224A241NR	LVR-IC	LDO, 2.4V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AX	gh	PT7M7812TTBE	Vdet-IC	3.08V±1.5%, +Reset PPO, -MR, Lead free	SOT-143	24vdh	VD5	5g	Pti
AX-	-	RT9819A-39PY	Vdet-IC	3.9V±1.5%, -Reset PPO	SOT-343R	26ut	VD7	5b	Rct
AY	-	PT7M7812STB	Vdet-IC	2.93V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
AY	-	XC6109C08AN	Vdet-IC	0.8V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
AY	-	XC6119C08ANR	Vdet-IC	0.8V±30mV, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
AY	-	XC6127C51FNR	Vdet-IC	5.1V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AY	-	XC6127N52ANR	Vdet-IC	5.2V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AY	-	XC6221A29BNR	LVR-IC	LDO, 2.95V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AY	gh	PT7M7812STBE	Vdet-IC	2.93V±1.5%, +Reset PPO, -MR, Lead free	SOT-143	24vdh	VD5	5g	Pti
AY=	-	RT9013A-18GY	LVR-IC	LDO, 1.8V±2%, 120mA, +CE	SC-82	26vn	VR4	5c	Rct
AZ	-	MAX821LUS-T	Vdet-IC	4.63V±1.5%, -Reset PPO, Select Rt	SOT-143	24a5	-	5c	Max
AZ	-	PT7M7812RTB	Vdet-IC	2.63V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
AZ	-	XC6109C09AN	Vdet-IC	0.9V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
AZ	-	XC6119C09ANR	Vdet-IC	0.9V±30mV, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
AZ	-	XC6127C53FNR	Vdet-IC	5.3V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
AZ	-	XC6127N54ANR	Vdet-IC	5.4V±0.8%, -Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
AZ	-	XC6221A30BNR	LVR-IC	LDO, 3.05V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
AZ	gh	PT7M7812RTBE	Vdet-IC	2.63V±1.5%, +Reset PPO, -MR, Lead free	SOT-143	24vdh	VD5	5g	Pti
AZ=	-	RT9013A-25GY	LVR-IC	LDO, 2.5V±2%, 120mA, +CE	SC-82	26vn	VR4	5c	Rct
B	-	3SK302	n-MOSFET	Dual gate, UHF-amp, 15V, ±30mA, 150mW, Idss=0..10mA	SOT-143	26fm	-	5b	Pan
B	-	3SK306	n-MOSFET	Dual gate, UHF-amp, 15V, ±30mA, 150mW, Idss=0..10mA	SOT-343	26fm	-	5b	Pan
B	-	XMFS3-M1	n-FET	GaAs, UHF, 5V, 60mA, 200mW, Idss=15mA(3V), 6GHz	SOT-143	23f3	-	5c	Mur
B	gc	ELM7523NCB	Vdet-IC	2.3V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
B	gd	ELM7523CCB	Vdet-IC	2.3V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
B0	-	AP8821C-10GI	Vdet-IC	1.0V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
B0	-	AP8821C-10GS	Vdet-IC	1.0V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
B0	-	AP8821C-10PI	Vdet-IC	1.0V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
B0	-	AP8821C-10PS	Vdet-IC	1.0V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
B0	-	R1140Q201B	LVR-IC	LDO, 2.0V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
B0	-	R1180Q201B	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
B0	-	R3114Q171A	Vdet-IC	1.7V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
B0	-	XC6127C55GNR	Vdet-IC	5.5V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
B0	-	XC61CC1002N	Vdet-IC	1.0V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
B0	-	XC6225A482NR-G	LVR-IC	LDO, 4.8V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
B0=	-	RT9013A-28GY	LVR-IC	LDO, 2.8V±2%, 120mA, +CE	SC-82	26vn	VR4	5c	Rct
b05	-	LN3526C1012M	Vdet-IC	1.0V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
b06	-	LN3526C1042M	Vdet-IC	1.0V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
b07	-	LN3526C1052M	Vdet-IC	1.0V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
B1	-	AP8821C-11GI	Vdet-IC	1.1V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
B1	-	AP8821C-11GS	Vdet-IC	1.1V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
B1	-	AP8821C-11PI	Vdet-IC	1.1V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
B1	-	AP8821C-11PS	Vdet-IC	1.1V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
B1	-	R1140Q211B	LVR-IC	LDO, 2.1V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
B1	-	R1180Q211B	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
B1	-	R3114Q181A	Vdet-IC	1.8V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
B1	-	XC61CC1102N	Vdet-IC	1.1V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
B1	-	XC6225A48ANR-G	LVR-IC	LDO, 4.85V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
B1	-	XC6233H211NR-G	LVR-IC	LVO, 2.1V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
B1=	-	RT9013A-33GY	LVR-IC	LDO, 3.3V±2%, 120mA, +CE	SC-82	26vn	VR4	5c	Rct
b15	-	LN3526C1112M	Vdet-IC	1.1V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
b16	-	LN3526C1142M	Vdet-IC	1.1V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
b17	-	LN3526C1152M	Vdet-IC	1.1V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
B2	-	AP8821C-12GI	Vdet-IC	1.2V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
B2	-	AP8821C-12GS	Vdet-IC	1.2V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
B2	-	AP8821C-12PI	Vdet-IC	1.2V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
B2	-	AP8821C-12PS	Vdet-IC	1.2V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
B2	-	R1140Q221B	LVR-IC	LDO, 2.2V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
B2	-	R1180Q221B	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
B2	-	R3114Q191A	Vdet-IC	1.9V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
B2	-	XC61CC1202N	Vdet-IC	1.2V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
B2	-	XC6223A121NR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
B2	-	XC6225A492NR-G	LVR-IC	LDO, 4.9V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
B2	-	XC6233H221NR-G	LVR-IC	LVO, 2.2V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
b25	-	LN3526C1212M	Vdet-IC	1.2V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
b26	-	LN3526C1242M	Vdet-IC	1.2V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
b27	-	LN3526C1252M	Vdet-IC	1.2V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
B3	-	AP8821C-13GI	Vdet-IC	1.3V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
B3	-	AP8821C-13GS	Vdet-IC	1.3V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
B3	-	AP8821C-13PI	Vdet-IC	1.3V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
B3	-	AP8821C-13PS	Vdet-IC	1.3V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
B3	-	R1140Q231B	LVR-IC	LDO, 2.3V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
B3	-	R1180Q231B	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
B3	-	R3114Q201A	Vdet-IC	2V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
B3	-	XC61CC1302N	Vdet-IC	1.3V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
B3	-	XC6223A131NR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
B3	-	XC6225A49ANR-G	LVR-IC	LDO, 4.95V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
B3	-	XC6233H231NR-G	LVR-IC	LVO, 2.3V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
B3=	-	RT9816D-12GY	Vdet-IC	1.2V±1.5%, 450ms, -Reset ODO, -MR	SC-82	26vdh	VD4	5b	Rct
b35	-	LN3526C1312M	Vdet-IC	1.3V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
b36	-	LN3526C1342M	Vdet-IC	1.3V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
b37	-	LN3526C1352M	Vdet-IC	1.3V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
B4	-	AP8821C-14GI	Vdet-IC	1.4V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
B4	-	AP8821C-14GS	Vdet-IC	1.4V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
B4	-	AP8821C-14PI	Vdet-IC	1.4V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
B4	-	AP8821C-14PS	Vdet-IC	1.4V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
B4	-	R1140Q241B	LVR-IC	LDO, 2.4V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
B4	-	R1180Q241B	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
B4	-	R3114Q211A	Vdet-IC	2.1V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
B4	-	XC61CC1402N	Vdet-IC	1.4V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
B4	-	XC6223A141NR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
B4	-	XC6225A502NR-G	LVR-IC	LDO, 5.0V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
B4	-	XC6233H241NR-G	LVR-IC	LVO, 2.4V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
b45	-	LN3526C1412M	Vdet-IC	1.4V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
b46	-	LN3526C1442M	Vdet-IC	1.4V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
b47	-	LN3526C1452M	Vdet-IC	1.4V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
B5	-	AP8821C-15GI	Vdet-IC	1.5V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
B5	-	AP8821C-15GS	Vdet-IC	1.5V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
B5	-	AP8821C-15PI	Vdet-IC	1.5V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
B5	-	AP8821C-15PS	Vdet-IC	1.5V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
B5	-	HSMS-2815	Si-diode	Dual, Schottky, RF, 20V, 1A, Vf<0.4V(1mA), <1.2pF, 15Ω(5mA)	SOT-143	24ce	-	5c	Agi
B5	-	R1140Q251B	LVR-IC	LDO, 2.5V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
B5	-	R1180Q251B	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
B5	-	R3114Q221A	Vdet-IC	2.2V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
B5	-	XC61CC1502N	Vdet-IC	1.5V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
B5	-	XC6223A151NR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
B5	-	XC6233H251NR-G	LVR-IC	LVO, 2.5V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
B5=	-	RT9013A-30GY	LVR-IC	LDO, 3.0V±2%, 120mA, +CE	SC-82	26vn	VR4	5c	Rct
b55	-	LN3526C1512M	Vdet-IC	1.5V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
b56	-	LN3526C1542M	Vdet-IC	1.5V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
b57	-	LN3526C1552M	Vdet-IC	1.5V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
B6	-	AP8821C-16GI	Vdet-IC	1.6V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
B6	-	AP8821C-16GS	Vdet-IC	1.6V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
B6	-	AP8821C-16PI	Vdet-IC	1.6V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
B6	-	AP8821C-16PS	Vdet-IC	1.6V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
B6	-	R1140Q261B	LVR-IC	LDO, 2.6V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
B6	-	R1180Q261B	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
B6	-	R3114Q231A	Vdet-IC	2.3V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
B6	-	XC61CC1602N	Vdet-IC	1.6V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
B6	-	XC6223A161NR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
B6	-	XC6233H261NR-G	LVR-IC	LVO, 2.6V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
B6=	-	RT9013A-15GY	LVR-IC	LDO, 1.5V±2%, 120mA, +CE	SC-82	26vn	VR4	5c	Rct
B62	-	S-80841CLNB-B62-T2	Vdet-IC	4.1V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B62	-	S-80841CLPF-B62-T2	Vdet-IC	4.1V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B63	-	S-80842CLNB-B63-T2	Vdet-IC	4.2V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B63	-	S-80842CLPF-B63-T2	Vdet-IC	4.2V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B64	-	S-80843CLNB-B64-T2	Vdet-IC	4.3V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B64	-	S-80843CLPF-B64-T2	Vdet-IC	4.3V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
b65	-	LN3526C1612M	Vdet-IC	1.6V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
B65	-	S-80844CLNB-B65-T2	Vdet-IC	4.4V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B65	-	S-80844CLPF-B65-T2	Vdet-IC	4.4V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
b66	-	LN3526C1642M	Vdet-IC	1.6V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
B66	-	S-80845CLNB-B66-T2	Vdet-IC	4.5V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B66	-	S-80845CLPF-B66-T2	Vdet-IC	4.5V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
b67	-	LN3526C1652M	Vdet-IC	1.6V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
B67	-	S-80846CLNB-B67-T2	Vdet-IC	4.6V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B67	-	S-80846CLPF-B67-T2	Vdet-IC	4.6V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B68	-	S-80847CLNB-B68-T2	Vdet-IC	4.7V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B68	-	S-80847CLPF-B68-T2	Vdet-IC	4.7V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B69	-	S-80848CLNB-B69-T2	Vdet-IC	4.8V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B69	-	S-80848CLPF-B69-T2	Vdet-IC	4.8V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6A	-	S-80815CLNB-B6A-T2	Vdet-IC	1.5V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6A	-	S-80815CLPF-B6A-T2	Vdet-IC	1.5V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6B	-	S-80816CLNB-B6B-T2	Vdet-IC	1.6V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6B	-	S-80816CLPF-B6B-T2	Vdet-IC	1.6V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6C	-	S-80817CLNB-B6C-T2	Vdet-IC	1.7V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6C	-	S-80817CLPF-B6C-T2	Vdet-IC	1.7V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6D	-	S-80818CLNB-B6D-T2	Vdet-IC	1.8V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6D	-	S-80818CLPF-B6D-T2	Vdet-IC	1.8V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6E	-	S-80819CLNB-B6E-T2	Vdet-IC	1.9V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6E	-	S-80819CLPF-B6E-T2	Vdet-IC	1.9V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6F	-	S-80820CLNB-B6F-T2	Vdet-IC	2.0V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6F	-	S-80820CLPF-B6F-T2	Vdet-IC	2.0V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6G	-	S-80821CLNB-B6G-T2	Vdet-IC	2.1V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6G	-	S-80821CLPF-B6G-T2	Vdet-IC	2.1V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6H	-	S-80822CLNB-B6H-T2	Vdet-IC	2.2V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6H	-	S-80822CLPF-B6H-T2	Vdet-IC	2.2V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6I	-	S-80823CLNB-B6I-T2	Vdet-IC	2.3V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6I	-	S-80823CLPF-B6I-T2	Vdet-IC	2.3V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6J	-	S-80824CLNB-B6J-T2	Vdet-IC	2.4V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6J	-	S-80824CLPF-B6J-T2	Vdet-IC	2.4V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6K	-	S-80825CLNB-B6K-T2	Vdet-IC	2.5V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6K	-	S-80825CLPF-B6K-T2	Vdet-IC	2.5V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6L	-	S-80826CLNB-B6L-T2	Vdet-IC	2.6V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6L	-	S-80826CLPF-B6L-T2	Vdet-IC	2.6V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6M	-	S-80827CLNB-B6M-T2	Vdet-IC	2.7V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6M	-	S-80827CLPF-B6M-T2	Vdet-IC	2.7V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6N	-	S-80828CLNB-B6N-T2	Vdet-IC	2.8V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6N	-	S-80828CLPF-B6N-T2	Vdet-IC	2.8V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6O	-	S-80829CLNB-B6O-T2	Vdet-IC	2.9V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6O	-	S-80829CLPF-B6O-T2	Vdet-IC	2.9V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6P	-	S-80830CLNB-B6P-T2	Vdet-IC	3.0V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6P	-	S-80830CLPF-B6P-T2	Vdet-IC	3.0V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6Q	-	S-80831CLNB-B6Q-T2	Vdet-IC	3.1V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6Q	-	S-80831CLPF-B6Q-T2	Vdet-IC	3.1V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6R	-	S-80832CLNB-B6R-T2	Vdet-IC	3.2V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6R	-	S-80832CLPF-B6R-T2	Vdet-IC	3.2V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6S	-	S-80833CLNB-B6S-T2	Vdet-IC	3.3V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6S	-	S-80833CLPF-B6S-T2	Vdet-IC	3.3V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6T	-	S-80834CLNB-B6T-T2	Vdet-IC	3.4V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6T	-	S-80834CLPF-B6T-T2	Vdet-IC	3.4V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6U	-	S-80835CLNB-B6U-T2	Vdet-IC	3.5V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6U	-	S-80835CLPF-B6U-T2	Vdet-IC	3.5V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6V	-	S-80836CLNB-B8U-T2	Vdet-IC	3.6V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6V	-	S-80836CLPF-B8U-T2	Vdet-IC	3.6V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6W	-	S-80837CLNB-B6W-T2	Vdet-IC	3.7V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6W	-	S-80837CLPF-B6W-T2	Vdet-IC	3.7V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6X	-	S-80838CLNB-B6X-T2	Vdet-IC	3.8V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6X	-	S-80838CLPF-B6X-T2	Vdet-IC	3.8V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6Y	-	S-80839CLNB-B6Y-T2	Vdet-IC	3.9V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6Y	-	S-80839CLPF-B6Y-T2	Vdet-IC	3.9V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B6Z	-	S-80840CLNB-B6Z-T2	Vdet-IC	4.0V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B6Z	-	S-80840CLPF-B6Z-T2	Vdet-IC	4.0V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7	-	AP8821C-17GI	Vdet-IC	1.7V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
B7	-	AP8821C-17GS	Vdet-IC	1.7V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
B7	-	AP8821C-17PI	Vdet-IC	1.7V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
B7	-	AP8821C-17PS	Vdet-IC	1.7V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
B7	-	HSMS-2817	Si-diode	4x SBD, RF, 20V, 1A, Vf<0.4V(1mA), <1.2pF, 15Ω(5mA)	SOT-143	24	D1	5c	Agi
B7	-	R1140Q271B	LVR-IC	LDO, 2.7V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
B7	-	R1180Q271B	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
B7	-	R3114Q241A	Vdet-IC	2.4V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
B7	-	XC61CC1702N	Vdet-IC	1.7V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
B7	-	XC6221B081NR	LVR-IC	LDO, 0.8V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
B7	-	XC6223A171NR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B7	-	XC6233H271NR-G	LVR-IC	LVO, 2.7V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
b75	-	LN3526C1712M	Vdet-IC	1.7V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
b76	-	LN3526C1742M	Vdet-IC	1.7V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
b77	-	LN3526C1752M	Vdet-IC	1.7V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
B7A	-	S-80849CLNB-B7A-T2	Vdet-IC	4.9V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7A	-	S-80849CLPF-B7A-T2	Vdet-IC	4.9V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7B	-	S-80850CLNB-B7B-T2	Vdet-IC	5.0V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7B	-	S-80850CLPF-B7B-T2	Vdet-IC	5.0V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7C	-	S-80851CLNB-B7C-T2	Vdet-IC	5.1V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7C	-	S-80851CLPF-B7C-T2	Vdet-IC	5.1V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7D	-	S-80852CLNB-B7D-T2	Vdet-IC	5.2V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7D	-	S-80852CLPF-B7D-T2	Vdet-IC	5.2V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7E	-	S-80853CLNB-B7E-T2	Vdet-IC	5.3V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7E	-	S-80853CLPF-B7E-T2	Vdet-IC	5.3V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7F	-	S-80854CLNB-B7F-T2	Vdet-IC	5.4V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7F	-	S-80854CLPF-B7F-T2	Vdet-IC	5.4V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7G	-	S-80855CLNB-B7G-T2	Vdet-IC	5.5V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7G	-	S-80855CLPF-B7G-T2	Vdet-IC	5.5V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7H	-	S-80856CLNB-B7H-T2	Vdet-IC	5.6V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7H	-	S-80856CLPF-B7H-T2	Vdet-IC	5.6V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7I	-	S-80857CLNB-B7I-T2	Vdet-IC	5.7V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7I	-	S-80857CLPF-B7I-T2	Vdet-IC	5.7V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7J	-	S-80858CLNB-B7J-T2	Vdet-IC	5.8V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7J	-	S-80858CLPF-B7J-T2	Vdet-IC	5.8V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7K	-	S-80859CLNB-B7K-T2	Vdet-IC	5.9V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7K	-	S-80859CLPF-B7K-T2	Vdet-IC	5.9V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7L	-	S-80860CLNB-B7L-T2	Vdet-IC	6.0V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7L	-	S-80860CLPF-B7L-T2	Vdet-IC	6.0V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7M	-	S-80808CLNB-B7M-T2	Vdet-IC	0.8V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7M	-	S-80808CLPF-B7M-T2	Vdet-IC	0.8V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7N	-	S-80809CLNB-B7N-T2	Vdet-IC	0.9V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7N	-	S-80809CLPF-B7N-T2	Vdet-IC	0.9V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7O	-	S-80810CLNB-B7O-T2	Vdet-IC	1.0V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7O	-	S-80810CLPF-B7O-T2	Vdet-IC	1.0V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7P	-	S-80811CLNB-B7P-T2	Vdet-IC	1.1V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7P	-	S-80811CLPF-B7P-T2	Vdet-IC	1.1V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7Q	-	S-80812CLNB-B7Q-T2	Vdet-IC	1.2V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7Q	-	S-80812CLPF-B7Q-T2	Vdet-IC	1.2V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7R	-	S-80813CLNB-B7R-T2	Vdet-IC	1.3V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7R	-	S-80813CLPF-B7R-T2	Vdet-IC	1.3V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B7S	-	S-80814CLNB-B7S-T2	Vdet-IC	1.4V±2%, -Reset PPO	SOT-143R	26vdl	VD7	5b	Sii
B7S	-	S-80814CLPF-B7S-T2	Vdet-IC	1.4V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B8	-	AP8821C-18GI	Vdet-IC	1.8V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
B8	-	AP8821C-18GS	Vdet-IC	1.8V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
B8	-	AP8821C-18PI	Vdet-IC	1.8V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
B8	-	AP8821C-18PS	Vdet-IC	1.8V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
B8	-	HSMS-2818	Si-diode	4x SBD, RF, 20V, 1A, Vf<0.4V(1mA), <1.2pF, 15Ω(5mA)	SOT-143	24	D2	5c	Agi
B8	-	R1140Q281B	LVR-IC	LDO, 2.8V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
B8	-	R1180Q281B	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
B8	-	R3114Q251A	Vdet-IC	2.5V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
B8	-	XC61CC1802N	Vdet-IC	1.8V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
B8	-	XC6221B091NR	LVR-IC	LDO, 0.9V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
B8	-	XC6223A181NR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
B8	-	XC6233H281NR-G	LVR-IC	LVO, 2.8V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
B8=	-	RT9818E-27GY	Vdet-IC	2.7V±1.5%, +Reset ODO	SOT-343R	26ut	VD6	5b	Rct
B82	-	S-80841CNNB-B82-T2	Vdet-IC	4.1V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B82	-	S-80841CNPF-B82-T2	Vdet-IC	4.1V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B83	-	S-80842CNNB-B83-T2	Vdet-IC	4.2V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B83	-	S-80842CNPF-B83-T2	Vdet-IC	4.2V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B84	-	S-80843CNNB-B84-T2	Vdet-IC	4.3V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B84	-	S-80843CNPF-B84-T2	Vdet-IC	4.3V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
b85	-	LN3526C1812M	Vdet-IC	1.8V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
B85	-	S-80844CNNB-B85-T2	Vdet-IC	4.4V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B85	-	S-80844CNPF-B85-T2	Vdet-IC	4.4V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
b86	-	LN3526C1842M	Vdet-IC	1.8V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
B86	-	S-80845CNNB-B86-T2	Vdet-IC	4.5V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B86	-	S-80845CNPF-B86-T2	Vdet-IC	4.5V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
b87	-	LN3526C1852M	Vdet-IC	1.8V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
B87	-	S-80846CNNB-B87-T2	Vdet-IC	4.6V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B87	-	S-80846CNPF-B87-T2	Vdet-IC	4.6V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B88	-	S-80847CNNB-B88-T2	Vdet-IC	4.7V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B88	-	S-80847CNPF-B88-T2	Vdet-IC	4.7V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B89	-	S-80848CNNB-B89-T2	Vdet-IC	4.8V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B89	-	S-80848CNPF-B89-T2	Vdet-IC	4.8V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8A	-	S-80815CNNB-B8A-T2	Vdet-IC	1.5V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8A	-	S-80815CNPF-B8A-T2	Vdet-IC	1.5V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8B	-	S-80816CNNB-B8B-T2	Vdet-IC	1.6V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8B	-	S-80816CNPF-B8B-T2	Vdet-IC	1.6V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8C	-	S-80817CNNB-B8C-T2	Vdet-IC	1.7V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8C	-	S-80817CNPF-B8C-T2	Vdet-IC	1.7V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8D	-	S-80818CNNB-B8D-T2	Vdet-IC	1.8V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8D	-	S-80818CNPF-B8D-T2	Vdet-IC	1.8V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8E	-	S-80819CNNB-B8E-T2	Vdet-IC	1.9V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8E	-	S-80819CNPF-B8E-T2	Vdet-IC	1.9V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8F	-	S-80820CNNB-B8F-T2	Vdet-IC	2.0V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8F	-	S-80820CNPF-B8F-T2	Vdet-IC	2.0V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8G	-	S-80821CNNB-B8G-T2	Vdet-IC	2.1V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8G	-	S-80821CNPF-B8G-T2	Vdet-IC	2.1V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8H	-	S-80822CNNB-B8H-T2	Vdet-IC	2.2V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8H	-	S-80822CNPF-B8H-T2	Vdet-IC	2.2V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8I	-	S-80823CNNB-B8I-T2	Vdet-IC	2.3V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8I	-	S-80823CNPF-B8I-T2	Vdet-IC	2.3V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8J	-	S-80824CNNB-B8J-T2	Vdet-IC	2.4V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8J	-	S-80824CNPF-B8J-T2	Vdet-IC	2.4V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8K	-	S-80825CNNB-B8K-T2	Vdet-IC	2.5V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8K	-	S-80825CNPF-B8K-T2	Vdet-IC	2.5V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8L	-	S-80826CNNB-B8L-T2	Vdet-IC	2.6V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8L	-	S-80826CNPF-B8L-T2	Vdet-IC	2.6V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8M	-	S-80827CNNB-B8M-T2	Vdet-IC	2.7V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8M	-	S-80827CNPF-B8M-T2	Vdet-IC	2.7V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8N	-	S-80828CNNB-B8N-T2	Vdet-IC	2.8V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8N	-	S-80828CNPF-B8N-T2	Vdet-IC	2.8V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8O	-	S-80829CNNB-B8O-T2	Vdet-IC	2.9V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8O	-	S-80829CNPF-B8O-T2	Vdet-IC	2.9V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8P	-	S-80830CNNB-B8P-T2	Vdet-IC	3.0V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8P	-	S-80830CNPF-B8P-T2	Vdet-IC	3.0V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8Q	-	S-80831CNNB-B8Q-T2	Vdet-IC	3.1V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8Q	-	S-80831CNPF-B8Q-T2	Vdet-IC	3.1V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8R	-	S-80832CNNB-B8R-T2	Vdet-IC	3.2V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8R	-	S-80832CNPF-B8R-T2	Vdet-IC	3.2V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8S	-	S-80833CNNB-B8S-T2	Vdet-IC	3.3V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8S	-	S-80833CNPF-B8S-T2	Vdet-IC	3.3V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8T	-	S-80834CNNB-B8T-T2	Vdet-IC	3.4V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8T	-	S-80834CNPF-B8T-T2	Vdet-IC	3.4V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8U	-	S-80835CNNB-B8U-T2	Vdet-IC	3.5V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8U	-	S-80835CNPF-B8U-T2	Vdet-IC	3.5V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8V	-	S-80836CNNB-B8V-T2	Vdet-IC	3.6V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8V	-	S-80836CNPF-B8V-T2	Vdet-IC	3.6V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8W	-	S-80837CNNB-B8W-T2	Vdet-IC	3.7V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8W	-	S-80837CNPF-B8W-T2	Vdet-IC	3.7V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8X	-	S-80838CNNB-B8X-T2	Vdet-IC	3.8V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8X	-	S-80838CNPF-B8X-T2	Vdet-IC	3.8V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8Y	-	S-80839CNNB-B8Y-T2	Vdet-IC	3.9V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8Y	-	S-80839CNPF-B8Y-T2	Vdet-IC	3.9V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B8Z	-	S-80840CNNB-B8Z-T2	Vdet-IC	4.0V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B8Z	-	S-80840CNPF-B8Z-T2	Vdet-IC	4.0V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B9	-	AP8821C-19GI	Vdet-IC	1.9V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
B9	-	AP8821C-19GS	Vdet-IC	1.9V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
B9	-	AP8821C-19PI	Vdet-IC	1.9V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
B9	-	AP8821C-19PS	Vdet-IC	1.9V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
B9	-	R1140Q291B	LVR-IC	LDO, 2.9V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
B9	-	R1180Q291B	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
B9	-	R3114Q261A	Vdet-IC	2.6V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
B9	-	XC61CC1902N	Vdet-IC	1.9V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
B9	-	XC6221B101NR	LVR-IC	LDO, 1.0V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
B9	-	XC6223A191NR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
B9	-	XC6233H291NR-G	LVR-IC	LVO, 2.9V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
B9=	-	RT9818E-33GY	Vdet-IC	3.3V±1.5%, +Reset ODO	SOT-343R	26ut	VD6	5b	Rct
b95	-	LN3526C1912M	Vdet-IC	1.9V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
b96	-	LN3526C1942M	Vdet-IC	1.9V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
b97	-	LN3526C1952M	Vdet-IC	1.9V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
B9A	-	S-80849CNNB-B9A-T2	Vdet-IC	4.9V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9A	-	S-80849CNPF-B9A-T2	Vdet-IC	4.9V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B9B	-	S-80850CNNB-B9B-T2	Vdet-IC	5.0V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9B	-	S-80850CNPF-B9B-T2	Vdet-IC	5.0V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B9C	-	S-80851CNNB-B9C-T2	Vdet-IC	5.1V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9C	-	S-80851CNPF-B9C-T2	Vdet-IC	5.1V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B9D	-	S-80852CNNB-B9D-T2	Vdet-IC	5.2V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9D	-	S-80852CNPF-B9D-T2	Vdet-IC	5.2V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B9E	-	S-80853CNNB-B9E-T2	Vdet-IC	5.3V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9E	-	S-80853CNPF-B9E-T2	Vdet-IC	5.3V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B9F	-	S-80854CNNB-B9F-T2	Vdet-IC	5.4V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9F	-	S-80854CNPF-B9F-T2	Vdet-IC	5.4V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B9G	-	S-80855CNNB-B9G-T2	Vdet-IC	5.5V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9G	-	S-80855CNPF-B9G-T2	Vdet-IC	5.5V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B9H	-	S-80856CNNB-B9H-T2	Vdet-IC	5.6V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9H	-	S-80856CNPF-B9H-T2	Vdet-IC	5.6V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B9I	-	S-80857CNNB-B9I-T2	Vdet-IC	5.7V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9I	-	S-80857CNPF-B9I-T2	Vdet-IC	5.7V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B9J	-	S-80858CNNB-B9J-T2	Vdet-IC	5.8V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9J	-	S-80858CNPF-B9J-T2	Vdet-IC	5.8V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B9K	-	S-80859CNNB-B9K-T2	Vdet-IC	5.9V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9K	-	S-80859CNPF-B9K-T2	Vdet-IC	5.9V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B9L	-	S-80860CNNB-B9L-T2	Vdet-IC	6.0V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9L	-	S-80860CNPF-B9L-T2	Vdet-IC	6.0V±2%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
B9M	-	S-80808CNNB-B9M-T2	Vdet-IC	0.8V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9M	-	S-80808CNPF-B9M-T2	Vdet-IC	0.8V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B9N	-	S-80809CNNB-B9N-T2	Vdet-IC	0.9V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9N	-	S-80809CNPF-B9N-T2	Vdet-IC	0.9V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B9O	-	S-80810CNNB-B9O-T2	Vdet-IC	1.0V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9O	-	S-80810CNPF-B9O-T2	Vdet-IC	1.0V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B9P	-	S-80811CNNB-B9P-T2	Vdet-IC	1.1V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9P	-	S-80811CNPF-B9P-T2	Vdet-IC	1.1V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B9Q	-	S-80812CNNB-B9Q-T2	Vdet-IC	1.2V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9Q	-	S-80812CNPF-B9Q-T2	Vdet-IC	1.2V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B9R	-	S-80813CNNB-B9R-T2	Vdet-IC	1.3V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9R	-	S-80813CNPF-B9R-T2	Vdet-IC	1.3V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
B9S	-	S-80814CNNB-B9S-T2	Vdet-IC	1.4V±2%, -Reset ODO	SOT-143R	26vdl	VD6	5b	Sii
B9S	-	S-80814CNPF-B9S-T2	Vdet-IC	1.4V±2%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
BA	-	MAX821MUS-T	Vdet-IC	4.38V±1.5%, -Reset PPO, Select Rt	SOT-143	24a5	-	5c	Max
BA	-	PT7M7812ZTB	Vdet-IC	2.32V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
BA	-	R1141Q201B	LVR-IC	LDO, 2.0V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
BA	-	R3112Q101A	Vdet-IC	1V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
BA	-	RP130Q211A	LVR-IC	LDO, LN, -CE, 2.1V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
BA	-	XC6127C15GNR	Vdet-IC	1.5V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BA	-	XC6127N16BNR	Vdet-IC	1.6V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BA	-	XC6221B111NR	LVR-IC	LDO, 1.1V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BA	-	XC6223A201NR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
BA	gh	PT7M7812ZTBE	Vdet-IC	2.32V±1.5%, +Reset PPO, -MR, Lead free	SOT-143	24vdh	VD5	5g	Pti
BA=	-	RT9816D-30GY	Vdet-IC	3.0V±1.5%, 450ms, -Reset ODO, -MR	SC-82	26vdh	VD4	5b	Rct
BB	-	1SV237	PIN-diode	Dual, VHF/UHF, 50V, 0.25pF(50V), Rs=4Ω(10mA, 100MHz)	SOT-143	24dv	-	5b	Tos
BB	-	MAX821TUS-T	Vdet-IC	3.08V±1.5%, -Reset PPO, Select Rt	SOT-143	24a5	-	5c	Max
BB	-	PT7M7812YTB	Vdet-IC	2.20V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
BB	-	R1141Q211B	LVR-IC	LDO, 2.1V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
BB	-	R3112Q111A	Vdet-IC	1.1V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
BB	-	RP130Q221A	LVR-IC	LDO, LN, -CE, 2.2V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
BB	-	XC6127C17GNR	Vdet-IC	1.7V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BB	-	XC6127N18BNR	Vdet-IC	1.8V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BB	-	XC6221B121NR	LVR-IC	LDO, 1.2V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BB	-	XC6223A211NR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
BB	gh	PT7M7812YTBE	Vdet-IC	2.20V±1.5%, +Reset PPO, -MR, Lead free	SOT-143	24vdh	VD5	5g	Pti
BB=	-	RT9818A-30GY	Vdet-IC	3.0V±1.5%, +Reset ODO	SOT-343R	26ut	VD6	5c	Rct
BBs	-	BAR81	Si-diode	Triple, RF, Shunt, 30V, 100mA, Vf<0.93V(100mA), <1.3pF	MW-4	25cd	-	5c	Inf
BC	-	MAX821SUS-T	Vdet-IC	2.93V±1.5%, -Reset PPO, Select Rt	SOT-143	24a5	-	5c	Max
BC	-	R1141Q221B	LVR-IC	LDO, 2.2V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
BC	-	R3112Q121A	Vdet-IC	1.2V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
BC	-	RP130Q231A	LVR-IC	LDO, LN, -CE, 2.3V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
BC	-	XC6127C19GNR	Vdet-IC	1.9V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BC	-	XC6127N20BNR	Vdet-IC	2.0V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BC	-	XC6221B131NR	LVR-IC	LDO, 1.3V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BC	-	XC6223A221NR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
BC=	-	RT9818E-20GY	Vdet-IC	2.0V±1.5%, +Reset ODO	SOT-343R	26ut	VD6	5b	Rct
BD	-	MAX821RUS-T	Vdet-IC	2.63V±1.5%, -Reset PPO, Select Rt	SOT-143	24a5	-	5c	Max
BD	-	R1141Q231B	LVR-IC	LDO, 2.3V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
BD	-	R3112Q131A	Vdet-IC	1.3V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
BD	-	RP130Q241A	LVR-IC	LDO, LN, -CE, 2.4V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
BD	-	XC6127C21GNR	Vdet-IC	2.1V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BD	-	XC6127N22BNR	Vdet-IC	2.2V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BD	-	XC6221B141NR	LVR-IC	LDO, 1.4V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BD	-	XC6223A231NR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
BD=	-	RT9818G-20GY	Vdet-IC	2.0V±1.5%, +Reset ODO, Td=220ms	SOT-343R	26ut	VD6	5b	Rct
BE	-	R1141Q241B	LVR-IC	LDO, 2.4V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
BE	-	R3112Q141A	Vdet-IC	1.4V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
BE	-	RP130Q251A	LVR-IC	LDO, LN, -CE, 2.5V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
BE	-	XC6127C23GNR	Vdet-IC	2.3V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BE	-	XC6127N24BNR	Vdet-IC	2.4V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BE	-	XC6221B151NR	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BE	-	XC6223A241NR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
BE=	-	RT9198-1HGY	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	SOT-343R	26vn	VR4	5b	Rct
BF	-	MAX822LUS-T	Vdet-IC	4.63V±1.5%, +Reset PPO, Select Rt	SOT-143	24a5	-	5c	Max
BF	-	R1141Q251B	LVR-IC	LDO, 2.5V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
BF	-	R3112Q151A	Vdet-IC	1.5V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
BF	-	RP130Q261A	LVR-IC	LDO, LN, -CE, 2.6V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
BF	-	XC6127C25GNR	Vdet-IC	2.5V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BF	-	XC6127N26BNR	Vdet-IC	2.6V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BF	-	XC6221B161NR	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BF	-	XC6223A251NR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
BG	-	MAX822MUS-T	Vdet-IC	4.38V±1.5%, +Reset PPO, Select Rt	SOT-143	24a5	-	5c	Max
BG	-	R1141Q261B	LVR-IC	LDO, 2.6V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
BG	-	R3112Q161A	Vdet-IC	1.6V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
BG	-	RP130Q271A	LVR-IC	LDO, LN, -CE, 2.7V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
BH	-	MAX822TUS-T	Vdet-IC	3.08V±1.5%, +Reset PPO, Select Rt	SOT-143	24a5	-	5c	Max
BH	-	R1141Q271B	LVR-IC	LDO, 2.7V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
BH	-	R3112Q171A	Vdet-IC	1.7V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
BH	-	RP130Q281A	LVR-IC	LDO, LN, -CE, 2.8V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
BH	-	XC6127C27GNR	Vdet-IC	2.7V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BH	-	XC6127N28BNR	Vdet-IC	2.8V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BH	-	XC6221B171NR	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BH	-	XC6223A261NR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
BJ	-	MAX822SUS-T	Vdet-IC	2.93V±1.5%, +Reset PPO, Select Rt	SOT-143	24a5	-	5c	Max
BJ	-	R1141Q281B	LVR-IC	LDO, 2.8V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
BJ	-	R3112Q181A	Vdet-IC	1.8V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
BJ	-	RP130Q281A5	LVR-IC	LDO, LN, -CE, 2.85V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
BJQ	-	AME8570AEIUAF23Z	Vdet-IC	2.32V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD5	5g	Ame
BJQ	gg	AME8570AEIUAF23L	Vdet-IC	2.32V±1.5%, -Reset PPO, -MR, lead free	SC-70-4	23vdh	VD5	5g	Ame
BJT	-	AME8570AEIUAF26Z	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD5	5g	Ame
BJT	gg	AME8570AEIUAF26L	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR, lead free	SC-70-4	23vdh	VD5	5g	Ame
BJW	-	AME8570AEIUAF29Z	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD5	5g	Ame
BJW	gg	AME8570AEIUAF29L	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR, lead free	SC-70-4	23vdh	VD5	5g	Ame
BJZ	-	AME8570AEIUCF29Z	Vdet-IC	2.93V±1.5%, +Reset PPO, -MR	SC-70-4	23vdh	VD5	5g	Ame
BJZ	gg	AME8570AEIUCF29L	Vdet-IC	2.93V±1.5%, +Reset PPO, -MR, lead free	SC-70-4	23vdh	VD5	5g	Ame
BK	-	MAX822RUS-T	Vdet-IC	2.63V±1.5%, +Reset PPO, Select Rt	SOT-143	24a5	-	5c	Max
BK	-	R1141Q291B	LVR-IC	LDO, 2.9V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
BK	-	R3112Q191A	Vdet-IC	1.9V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
BK	-	RP130Q291A	LVR-IC	LDO, LN, -CE, 2.9V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
BK	-	XC6127C29GNR	Vdet-IC	2.9V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BK	-	XC6127N30BNR	Vdet-IC	3.0V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BK	-	XC6221B181NR	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BK	-	XC6223A271NR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
BKC	-	AME8570AEIUAF31Z	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD5	5g	Ame
BKC	gg	AME8570AEIUAF31L	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR, lead free	SC-70-4	23vdh	VD5	5g	Ame
BKF	-	AME8570AEIUBF31Z	Vdet-IC	3.08V±1.5%, -Reset ODO, -MR	SC-70-4	23vdh	VD4	5g	Ame
BKF	gg	AME8570AEIUBF31L	Vdet-IC	3.08V±1.5%, -Reset ODO, -MR, lead free	SC-70-4	23vdh	VD4	5g	Ame
BKI	-	AME8570AEIUAF46Z	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD5	5g	Ame
BKI	gg	AME8570AEIUAF46L	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR, lead free	SC-70-4	23vdh	VD5	5g	Ame
BKL	-	AME8570AEIUCF46Z	Vdet-IC	4.63V±1.5%, +Reset PPO, -MR	SC-70-4	23vdh	VD5	5g	Ame
BKL	gg	AME8570AEIUCF46L	Vdet-IC	4.63V±1.5%, +Reset PPO, -MR, lead free	SC-70-4	23vdh	VD5	5g	Ame
BKZ	-	AME8570AEIUBF29Z	Vdet-IC	2.93V±1.5%, -Reset ODO, -MR	SC-70-4	23vdh	VD4	5g	Ame
BKZ	gg	AME8570AEIUBF29L	Vdet-IC	2.93V±1.5%, -Reset ODO, -MR, lead free	SC-70-4	23vdh	VD4	5g	Ame
BL	-	MAX821UUS-T	Vdet-IC	2.78V±1.5%, -Reset PPO, Select Rt	SOT-143	24a5	-	5c	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BL	-	R3112Q101C	Vdet-IC	1V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
BL	-	XC6127C31GNR	Vdet-IC	3.1V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BL	-	XC6127N32BNR	Vdet-IC	3.2V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BL	-	XC6221B191NR	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BL	-	XC6223A281NR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
BLM	-	AME8550AEIUA390Z	Vdet-IC	3.9V±2%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Ame
BLM	gg	AME8550AEIUA390L	Vdet-IC	3.9V±2%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Ame
BLs	-	BGA310	MMIC	RF amp, UHF, 9dB, 0..2.4GHz	SOT-143	24aa	A1	5b	Sie
BM	-	MAX821PUS-T	Vdet-IC	4.0V±1.5%, -Reset PPO, Select Rt	SOT-143	24a5	-	5c	Max
BM	-	R3112Q111C	Vdet-IC	1.1V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
BM	-	XC6127C33GNR	Vdet-IC	3.3V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BM	-	XC6127N34BNR	Vdet-IC	3.4V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BM	-	XC6221B201NR	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BM	-	XC6223A291NR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SSOT-24	26vn	VR4	5a	Tor
BMG	-	AME8570AEIUAA16Z	Vdet-IC	1.60V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD5	5g	Ame
BMG	gg	AME8570AEIUAA16L	Vdet-IC	1.60V±1.5%, -Reset PPO, -MR, lead free	SC-70-4	23vdh	VD5	5g	Ame
BML	-	AME8570AEIUBE20Z	Vdet-IC	2.0V±1.5%, -Reset ODO, -MR	SC-70-4	23vdh	VD4	5g	Ame
BML	gg	AME8570AEIUBE20L	Vdet-IC	2.0V±1.5%, -Reset ODO, -MR, lead free	SC-70-4	23vdh	VD4	5g	Ame
BMQ	-	AME8570AEIUAE21Z	Vdet-IC	2.10V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD5	5g	Ame
BMQ	gg	AME8570AEIUAE21L	Vdet-IC	2.10V±1.5%, -Reset PPO, -MR, lead free	SC-70-4	23vdh	VD5	5g	Ame
BMs	-	BGA312	MMIC	RF amp, UHF, 11dB, 0..2GHz	SOT-143	24aa	A1	5b	Sie
BMW	-	AME8570AEIUAE26Z	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD5	5g	Ame
BMW	gg	AME8570AEIUAE26L	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR, lead free	SC-70-4	23vdh	VD5	5g	Ame
BN	-	R3112Q121C	Vdet-IC	1.2V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
BN	-	XC6109C10AN	Vdet-IC	1.0V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
BN	-	XC6119C10ANR	Vdet-IC	1.0V±30mV, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
BN	-	XC6127C35GNR	Vdet-IC	3.5V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BN	-	XC6127N36BNR	Vdet-IC	3.6V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BN	-	XC6221B211NR	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BNC	-	AME8570AEIUAA27Z	Vdet-IC	2.70V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD5	5g	Ame
BNC	gg	AME8570AEIUAA27L	Vdet-IC	2.70V±1.5%, -Reset PPO, -MR, lead free	SC-70-4	23vdh	VD5	5g	Ame
BNH	-	AME8570AEIUAF27Z	Vdet-IC	2.70V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD5	5g	Ame
BNH	gg	AME8570AEIUAF27L	Vdet-IC	2.70V±1.5%, -Reset PPO, -MR, lead free	SC-70-4	23vdh	VD5	5g	Ame
BNL	-	AME8570AEIUBA28Z	Vdet-IC	2.80V±1.5%, -Reset ODO, -MR	SC-70-4	23vdh	VD4	5g	Ame
BNL	gg	AME8570AEIUBA28L	Vdet-IC	2.80V±1.5%, -Reset ODO, -MR, lead free	SC-70-4	23vdh	VD4	5g	Ame
BNQ	-	AME8570AEIUAE29Z	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD5	5g	Ame
BNQ	gg	AME8570AEIUAE29L	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR, lead free	SC-70-4	23vdh	VD5	5g	Ame
BNs	-	BGA318	MMIC	RF amp, UHF, 16dB, 0..1.2GHz	SOT-143	24aa	A1	5b	Sie
BOG	-	AME8570AEIUBE31Z	Vdet-IC	3.08V±1.5%, -Reset ODO, -MR	SC-70-4	23vdh	VD4	5g	Ame
BOG	gg	AME8570AEIUBE31L	Vdet-IC	3.08V±1.5%, -Reset ODO, -MR, lead free	SC-70-4	23vdh	VD4	5g	Ame
BOL	-	AME8570AEIUCF31Z	Vdet-IC	3.08V±1.5%, +Reset PPO, -MR	SC-70-4	23vdh	VD5	5g	Ame
BOL	gg	AME8570AEIUCF31L	Vdet-IC	3.08V±1.5%, +Reset PPO, -MR, lead free	SC-70-4	23vdh	VD5	5g	Ame
BOQ	-	AME8570AEIUAF40Z	Vdet-IC	4.0V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD5	5g	Ame
BOQ	gg	AME8570AEIUAF40L	Vdet-IC	4.0V±1.5%, -Reset PPO, -MR, lead free	SC-70-4	23vdh	VD5	5g	Ame
BOV	-	AME8570AEIUAF44Z	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD5	5g	Ame
BOV	gg	AME8570AEIUAF44L	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR, lead free	SC-70-4	23vdh	VD5	5g	Ame
BP	-	R3112Q131C	Vdet-IC	1.3V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
BP	-	XC6109C11AN	Vdet-IC	1.1V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
BP	-	XC6119C11ANR	Vdet-IC	1.1V±30mV, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
BP	-	XC6127C37GNR	Vdet-IC	3.7V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BP	-	XC6127N38BNR	Vdet-IC	3.8V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BP	-	XC6221B221NR	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BPA	-	AME8570AEIUBF44Z	Vdet-IC	4.38V±1.5%, -Reset ODO, -MR	SC-70-4	23vdh	VD4	5g	Ame
BPA	gg	AME8570AEIUBF44L	Vdet-IC	4.38V±1.5%, -Reset ODO, -MR, lead free	SC-70-4	23vdh	VD4	5g	Ame
BQ	-	R3112Q141C	Vdet-IC	1.4V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
BR	-	R3112Q151C	Vdet-IC	1.5V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
BR	-	XC6109C12AN	Vdet-IC	1.2V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
BR	-	XC6119C12ANR	Vdet-IC	1.2V±30mV, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
BR	-	XC6127C39GNR	Vdet-IC	3.9V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BR	-	XC6127N40BNR	Vdet-IC	4.0V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BR	-	XC6221B231NR	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BS	-	R3112Q161C	Vdet-IC	1.6V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
BS	-	XC6109C13AN	Vdet-IC	1.3V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
BS	-	XC6119C13ANR	Vdet-IC	1.3V±30mV, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
BS	-	XC6127C41GNR	Vdet-IC	4.1V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BS	-	XC6127N42BNR	Vdet-IC	4.2V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BS	-	XC6221B241NR	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BT	-	R3112Q171C	Vdet-IC	1.7V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
BT	-	XC6109C14AN	Vdet-IC	1.4V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
BT	-	XC6119C14ANR	Vdet-IC	1.4V±30mV, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BT	-	XC6127C43GNR	Vdet-IC	4.3V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BT	-	XC6127N44BNR	Vdet-IC	4.4V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BT	-	XC6221B251NR	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BU	-	R3112Q181C	Vdet-IC	1.8V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
BU	-	XC6109C15AN	Vdet-IC	1.5V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
BU	-	XC6119C15ANR	Vdet-IC	1.5V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
BU	-	XC6127C45GNR	Vdet-IC	4.5V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BU	-	XC6127N46BNR	Vdet-IC	4.6V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BU	-	XC6221B261NR	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BV	-	R3112Q191C	Vdet-IC	1.9V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
BV	-	XC6109C16AN	Vdet-IC	1.6V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
BV	-	XC6119C16ANR	Vdet-IC	1.6V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
BV	-	XC6127C47GNR	Vdet-IC	4.7V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BV	-	XC6127N48BNR	Vdet-IC	4.8V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BV	-	XC6221B271NR	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BVM	-	AME8550AEIUA270Z	Vdet-IC	2.7V±2%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Ame
BVM	gg	AME8550AEIUA270L	Vdet-IC	2.7V±2%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Ame
BVO	-	AME8570AEIUBA27Z	Vdet-IC	2.70V±1.5%, -Reset ODO, -MR	SC-70-4	23vdh	VD4	5g	Ame
BVO	gg	AME8570AEIUBA27L	Vdet-IC	2.70V±1.5%, -Reset ODO, -MR, lead free	SC-70-4	23vdh	VD4	5g	Ame
BX	-	XC6109C17AN	Vdet-IC	1.7V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
BX	-	XC6119C17ANR	Vdet-IC	1.7V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
BX	-	XC6127C49GNR	Vdet-IC	4.9V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BX	-	XC6127N50BNR	Vdet-IC	5.0V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BX	-	XC6221B281NR	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BY	-	XC6109C18AN	Vdet-IC	1.8V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
BY	-	XC6119C18ANR	Vdet-IC	1.8V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
BY	-	XC6127C51GNR	Vdet-IC	5.1V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BY	-	XC6127N52BNR	Vdet-IC	5.2V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BY	-	XC6221B291NR	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
BZ	-	XC6109C19AN	Vdet-IC	1.9V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
BZ	-	XC6119C19ANR	Vdet-IC	1.9V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
BZ	-	XC6127C53GNR	Vdet-IC	5.3V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
BZ	-	XC6127N54BNR	Vdet-IC	5.4V±0.8%, -Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
BZ	-	XC6221B301NR	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
C	-	3SK303	n-MOSFET	Dual gate, VHF-amp, 15V, ±30mA, 150mW, Idss=0..10mA	SOT-143	26fm	-	5b	Pan
C	-	3SK307	n-MOSFET	Dual gate, VHF-amp, 15V, ±30mA, 150mW, Idss=0..10mA	SOT-343	26fm	-	5b	Pan
C	gc	ELM7524NCB	Vdet-IC	2.4V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
C	gd	ELM7524CCB	Vdet-IC	2.4V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
C0	-	AP8821C-20GI	Vdet-IC	2.0V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
C0	-	AP8821C-20GS	Vdet-IC	2.0V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
C0	-	AP8821C-20PI	Vdet-IC	2.0V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
C0	-	AP8821C-20PS	Vdet-IC	2.0V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
C0	-	R1140Q301B	LVR-IC	LDO, 3.0V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
C0	-	R1180Q301B	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
C0	-	R3114Q271A	Vdet-IC	2.7V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
C0	-	XC6127C55HNR	Vdet-IC	5.5V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
C0	-	XC61CC2002N	Vdet-IC	2.0V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
C0	-	XC6225B482NR-G	LVR-IC	LDO, 4.8V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
c05	-	LN3526C2012M	Vdet-IC	2.0V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
c06	-	LN3526C2042M	Vdet-IC	2.0V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
c07	-	LN3526C2052M	Vdet-IC	2.0V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
C082A	-	VDA0820CTN	Vdet-IC	0.8V±2%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C092A	-	VDA0920CTN	Vdet-IC	0.9V±2%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C1	-	AP8821C-21GI	Vdet-IC	2.1V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
C1	-	AP8821C-21GS	Vdet-IC	2.1V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
C1	-	AP8821C-21PI	Vdet-IC	2.1V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
C1	-	AP8821C-21PS	Vdet-IC	2.1V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
C1	-	R1140Q311B	LVR-IC	LDO, 3.1V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
C1	-	R1180Q311B	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
C1	-	R3114Q281A	Vdet-IC	2.8V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
C1	-	XC61CC2102N	Vdet-IC	2.1V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
C1	-	XC6225B48ANR-G	LVR-IC	LDO, 4.85V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
C1	-	XC6233H301NR-G	LVR-IC	LVO, 3.0V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
C102A	-	VDA1020CTN	Vdet-IC	1.0V±2%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C112A	-	VDA1120CTN	Vdet-IC	1.1V±2%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C122A	-	VDA1220CTN	Vdet-IC	1.2V±2%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C132A	-	VDA1320CTN	Vdet-IC	1.3V±2%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C142A	-	VDA1420CTN	Vdet-IC	1.4V±2%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
c15	-	LN3526C2112M	Vdet-IC	2.1V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
C152A	-	VDA1520CTN	Vdet-IC	1.5V±2%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
c16	-	LN3526C2142M	Vdet-IC	2.1V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
C162A	-	VDA1620CTN	Vdet-IC	1.6V±2%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
c17	-	LN3526C2152M	Vdet-IC	2.1V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
C172A	-	VDA1720CTN	Vdet-IC	1.7V±2%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C181A	-	VDA1810CTN	Vdet-IC	1.8V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C18LA	-	VDD1810LCTN	Vdet-IC	1.8V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C18MA	-	VDD1810MCTN	Vdet-IC	1.8V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C18SA	-	VDD1810SCTN	Vdet-IC	1.8V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C191A	-	VDA1910CTN	Vdet-IC	1.9V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C19LA	-	VDD1910LCTN	Vdet-IC	1.9V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C19MA	-	VDD1910MCTN	Vdet-IC	1.9V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C19SA	-	VDD1910SCTN	Vdet-IC	1.9V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C2	-	AP8821C-22GI	Vdet-IC	2.2V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
C2	-	AP8821C-22GS	Vdet-IC	2.2V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
C2	-	AP8821C-22PI	Vdet-IC	2.2V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
C2	-	AP8821C-22PS	Vdet-IC	2.2V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
C2	-	R1140Q321B	LVR-IC	LDO, 3.2V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
C2	-	R1180Q321B	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
C2	-	R3114Q291A	Vdet-IC	2.9V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
C2	-	XC61CC2202N	Vdet-IC	2.2V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
C2	-	XC6223B121NR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
C2	-	XC6225B492NR-G	LVR-IC	LDO, 4.9V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
C2	-	XC6233H311NR-G	LVR-IC	LVO, 3.1V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
C201A	-	VDA2010CTN	Vdet-IC	2.0V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C20LA	-	VDD2010LCTN	Vdet-IC	2.0V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C20MA	-	VDD2010MCTN	Vdet-IC	2.0V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C20SA	-	VDD2010SCTN	Vdet-IC	2.0V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C211A	-	VDA2110CTN	Vdet-IC	2.1V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C21LA	-	VDD2110LCTN	Vdet-IC	2.1V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C21MA	-	VDD2110MCTN	Vdet-IC	2.1V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C21SA	-	VDD2110SCTN	Vdet-IC	2.1V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C221A	-	VDA2210CTN	Vdet-IC	2.2V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C22LA	-	VDD2210LCTN	Vdet-IC	2.2V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C22MA	-	VDD2210MCTN	Vdet-IC	2.2V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C22SA	-	VDD2210SCTN	Vdet-IC	2.2V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C231A	-	VDA2310CTN	Vdet-IC	2.3V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C23LA	-	VDD2310LCTN	Vdet-IC	2.3V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C23MA	-	VDD2310MCTN	Vdet-IC	2.3V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C23SA	-	VDD2310SCTN	Vdet-IC	2.3V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C241A	-	VDA2410CTN	Vdet-IC	2.4V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C24LA	-	VDD2410LCTN	Vdet-IC	2.4V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C24MA	-	VDD2410MCTN	Vdet-IC	2.4V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C24SA	-	VDD2410SCTN	Vdet-IC	2.4V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
c25	-	LN3526C2212M	Vdet-IC	2.2V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
C251A	-	VDA2510CTN	Vdet-IC	2.5V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C25LA	-	VDD2510LCTN	Vdet-IC	2.5V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C25MA	-	VDD2510MCTN	Vdet-IC	2.5V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C25SA	-	VDD2510SCTN	Vdet-IC	2.5V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
c26	-	LN3526C2242M	Vdet-IC	2.2V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
C261A	-	VDA2610CTN	Vdet-IC	2.6V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C26LA	-	VDD2610LCTN	Vdet-IC	2.6V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C26MA	-	VDD2610MCTN	Vdet-IC	2.6V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C26SA	-	VDD2610SCTN	Vdet-IC	2.6V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
c27	-	LN3526C2252M	Vdet-IC	2.2V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
C271A	-	VDA2710CTN	Vdet-IC	2.7V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C27LA	-	VDD2710LCTN	Vdet-IC	2.7V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C27MA	-	VDD2710MCTN	Vdet-IC	2.7V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C27SA	-	VDD2710SCTN	Vdet-IC	2.7V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C281A	-	VDA2810CTN	Vdet-IC	2.8V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C28LA	-	VDD2810LCTN	Vdet-IC	2.8V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C28MA	-	VDD2810MCTN	Vdet-IC	2.8V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C28SA	-	VDD2810SCTN	Vdet-IC	2.8V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C291A	-	VDA2910CTN	Vdet-IC	2.9V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C29LA	-	VDD2910LCTN	Vdet-IC	2.9V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C29MA	-	VDD2910MCTN	Vdet-IC	2.9V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C29SA	-	VDD2910SCTN	Vdet-IC	2.9V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C3	-	AP8821C-23GI	Vdet-IC	2.3V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
C3	-	AP8821C-23GS	Vdet-IC	2.3V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
C3	-	AP8821C-23PI	Vdet-IC	2.3V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
C3	-	AP8821C-23PS	Vdet-IC	2.3V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C3	-	R1140Q331B	LVR-IC	LDO, 3.3V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
C3	-	R1180Q331B	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
C3	-	R3114Q301A	Vdet-IC	3V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
C3	-	XC61CC2302N	Vdet-IC	2.3V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
C3	-	XC6223B131NR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
C3	-	XC6225B49ANR-G	LVR-IC	LDO, 4.95V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
C3	-	XC6233H321NR-G	LVR-IC	LVO, 3.2V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
C301A	-	VDA3010CTN	Vdet-IC	3.0V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C30LA	-	VDD3010LCTN	Vdet-IC	3.0V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C30MA	-	VDD3010MCTN	Vdet-IC	3.0V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C30SA	-	VDD3010SCTN	Vdet-IC	3.0V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C311A	-	VDA3110CTN	Vdet-IC	3.1V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C31LA	-	VDD3110LCTN	Vdet-IC	3.1V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C31MA	-	VDD3110MCTN	Vdet-IC	3.1V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C31SA	-	VDD3110SCTN	Vdet-IC	3.1V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C321A	-	VDA3210CTN	Vdet-IC	3.2V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C32LA	-	VDD3210LCTN	Vdet-IC	3.2V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C32MA	-	VDD3210MCTN	Vdet-IC	3.2V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C32SA	-	VDD3210SCTN	Vdet-IC	3.2V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C331A	-	VDA3310CTN	Vdet-IC	3.3V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C33LA	-	VDD3310LCTN	Vdet-IC	3.3V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C33MA	-	VDD3310MCTN	Vdet-IC	3.3V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C33SA	-	VDD3310SCTN	Vdet-IC	3.3V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C341A	-	VDA3410CTN	Vdet-IC	3.4V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C34LA	-	VDD3410LCTN	Vdet-IC	3.4V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C34MA	-	VDD3410MCTN	Vdet-IC	3.4V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C34SA	-	VDD3410SCTN	Vdet-IC	3.4V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
c35	-	LN3526C2312M	Vdet-IC	2.3V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
C351A	-	VDA3510CTN	Vdet-IC	3.5V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C35LA	-	VDD3510LCTN	Vdet-IC	3.5V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C35MA	-	VDD3510MCTN	Vdet-IC	3.5V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C35SA	-	VDD3510SCTN	Vdet-IC	3.5V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
c36	-	LN3526C2342M	Vdet-IC	2.3V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
C361A	-	VDA3610CTN	Vdet-IC	3.6V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C36LA	-	VDD3610LCTN	Vdet-IC	3.6V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C36MA	-	VDD3610MCTN	Vdet-IC	3.6V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C36SA	-	VDD3610SCTN	Vdet-IC	3.6V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
c37	-	LN3526C2352M	Vdet-IC	2.3V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
C371A	-	VDA3710CTN	Vdet-IC	3.7V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C37LA	-	VDD3710LCTN	Vdet-IC	3.7V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C37MA	-	VDD3710MCTN	Vdet-IC	3.7V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C37SA	-	VDD3710SCTN	Vdet-IC	3.7V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C381A	-	VDA3810CTN	Vdet-IC	3.8V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C38LA	-	VDD3810LCTN	Vdet-IC	3.8V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C38MA	-	VDD3810MCTN	Vdet-IC	3.8V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C38SA	-	VDD3810SCTN	Vdet-IC	3.8V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C391A	-	VDA3910CTN	Vdet-IC	3.9V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C39LA	-	VDD3910LCTN	Vdet-IC	3.9V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C39MA	-	VDD3910MCTN	Vdet-IC	3.9V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C39SA	-	VDD3910SCTN	Vdet-IC	3.9V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C3I	-	CMFSH-3i	Si-diode	Dual, Sw, 30V, 100mA, 350mW, Vf<1V(100mA), 7pF	SOT-143	24ce	-	5b	Cen
C4	-	AP8821C-24GI	Vdet-IC	2.4V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
C4	-	AP8821C-24GS	Vdet-IC	2.4V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
C4	-	AP8821C-24PI	Vdet-IC	2.4V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
C4	-	AP8821C-24PS	Vdet-IC	2.4V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
C4	-	R1140Q341B	LVR-IC	LDO, 3.4V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
C4	-	R1180Q341B	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
C4	-	R3114Q311A	Vdet-IC	3.1V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
C4	-	XC61CC2402N	Vdet-IC	2.4V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
C4	-	XC6223B141NR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
C4	-	XC6225B502NR-G	LVR-IC	LDO, 5.0V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
C4	-	XC6233H331NR-G	LVR-IC	LVO, 3.3V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
C401A	-	VDA4010CTN	Vdet-IC	4.0V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C40LA	-	VDD4010LCTN	Vdet-IC	4.0V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C40MA	-	VDD4010MCTN	Vdet-IC	4.0V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C40SA	-	VDD4010SCTN	Vdet-IC	4.0V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C411A	-	VDA4110CTN	Vdet-IC	4.1V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C41LA	-	VDD4110LCTN	Vdet-IC	4.1V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C41MA	-	VDD4110MCTN	Vdet-IC	4.1V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C41SA	-	VDD4110SCTN	Vdet-IC	4.1V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C421A	-	VDA4210CTN	Vdet-IC	4.2V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C42LA	-	VDD4210LCTN	Vdet-IC	4.2V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C42MA	-	VDD4210MCTN	Vdet-IC	4.2V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C42SA	-	VDD4210SCTN	Vdet-IC	4.2V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C431A	-	VDA4310CTN	Vdet-IC	4.3V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C43LA	-	VDD4310LCTN	Vdet-IC	4.3V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C43MA	-	VDD4310MCTN	Vdet-IC	4.3V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C43SA	-	VDD4310SCTN	Vdet-IC	4.3V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C441A	-	VDA4410CTN	Vdet-IC	4.4V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C44LA	-	VDD4410LCTN	Vdet-IC	4.4V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C44MA	-	VDD4410MCTN	Vdet-IC	4.4V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C44SA	-	VDD4410SCTN	Vdet-IC	4.4V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
c45	-	LN3526C2412M	Vdet-IC	2.4V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
C451A	-	VDA4510CTN	Vdet-IC	4.5V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C45LA	-	VDD4510LCTN	Vdet-IC	4.5V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C45MA	-	VDD4510MCTN	Vdet-IC	4.5V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C45SA	-	VDD4510SCTN	Vdet-IC	4.5V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
c46	-	LN3526C2442M	Vdet-IC	2.4V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
C461A	-	VDA4610CTN	Vdet-IC	4.6V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C46LA	-	VDD4610LCTN	Vdet-IC	4.6V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C46MA	-	VDD4610MCTN	Vdet-IC	4.6V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C46SA	-	VDD4610SCTN	Vdet-IC	4.6V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
c47	-	LN3526C2452M	Vdet-IC	2.4V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
C471A	-	VDA4710CTN	Vdet-IC	4.7V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C47LA	-	VDD4710LCTN	Vdet-IC	4.7V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C47MA	-	VDD4710MCTN	Vdet-IC	4.7V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C47SA	-	VDD4710SCTN	Vdet-IC	4.7V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C481A	-	VDA4810CTN	Vdet-IC	4.8V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C48LA	-	VDD4810LCTN	Vdet-IC	4.8V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C48MA	-	VDD4810MCTN	Vdet-IC	4.8V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C48SA	-	VDD4810SCTN	Vdet-IC	4.8V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C491A	-	VDA4910CTN	Vdet-IC	4.9V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C49LA	-	VDD4910LCTN	Vdet-IC	4.9V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C49MA	-	VDD4910MCTN	Vdet-IC	4.9V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C49SA	-	VDD4910SCTN	Vdet-IC	4.9V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C5	-	AP8821C-25GI	Vdet-IC	2.5V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
C5	-	AP8821C-25GS	Vdet-IC	2.5V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
C5	-	AP8821C-25PI	Vdet-IC	2.5V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
C5	-	AP8821C-25PS	Vdet-IC	2.5V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
C5	-	HSMS-2825	Si-diode	Dual, Schottky, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-143	24ce	-	5c	Agi
C5	-	R1140Q351B	LVR-IC	LDO, 3.5V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
C5	-	R1180Q351B	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
C5	-	R3114Q321A	Vdet-IC	3.2V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
C5	-	XC61CC2502N	Vdet-IC	2.5V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
C5	-	XC6223B151NR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
C5	-	XC6233H341NR-G	LVR-IC	LVO, 3.4V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
C501A	-	VDA5010CTN	Vdet-IC	5.0V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C50LA	-	VDD5010LCTN	Vdet-IC	5.0V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C50MA	-	VDD5010MCTN	Vdet-IC	5.0V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C50SA	-	VDD5010SCTN	Vdet-IC	5.0V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C511A	-	VDA5110CTN	Vdet-IC	5.1V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C51LA	-	VDD5110LCTN	Vdet-IC	5.1V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C51MA	-	VDD5110MCTN	Vdet-IC	5.1V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C51SA	-	VDD5110SCTN	Vdet-IC	5.1V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C521A	-	VDA5210CTN	Vdet-IC	5.2V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C52LA	-	VDD5210LCTN	Vdet-IC	5.2V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C52MA	-	VDD5210MCTN	Vdet-IC	5.2V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C52SA	-	VDD5210SCTN	Vdet-IC	5.2V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C531A	-	VDA5310CTN	Vdet-IC	5.3V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C53LA	-	VDD5310LCTN	Vdet-IC	5.3V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C53MA	-	VDD5310MCTN	Vdet-IC	5.3V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C53SA	-	VDD5310SCTN	Vdet-IC	5.3V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C541A	-	VDA5410CTN	Vdet-IC	5.4V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C54LA	-	VDD5410LCTN	Vdet-IC	5.4V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C54MA	-	VDD5410MCTN	Vdet-IC	5.4V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C54SA	-	VDD5410SCTN	Vdet-IC	5.4V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
c55	-	LN3526C2512M	Vdet-IC	2.5V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
C551A	-	VDA5510CTN	Vdet-IC	5.5V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C55LA	-	VDD5510LCTN	Vdet-IC	5.5V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C55MA	-	VDD5510MCTN	Vdet-IC	5.5V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C55SA	-	VDD5510SCTN	Vdet-IC	5.5V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
c56	-	LN3526C2542M	Vdet-IC	2.5V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
C561A	-	VDA5610CTN	Vdet-IC	5.6V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C56LA	-	VDD5610LCTN	Vdet-IC	5.6V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C56MA	-	VDD5610MCTN	Vdet-IC	5.6V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C56SA	-	VDD5610SCTN	Vdet-IC	5.6V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
c57	-	LN3526C2552M	Vdet-IC	2.5V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
C571A	-	VDA5710CTN	Vdet-IC	5.7V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C57LA	-	VDD5710LCTN	Vdet-IC	5.7V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C57MA	-	VDD5710MCTN	Vdet-IC	5.7V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C57SA	-	VDD5710SCTN	Vdet-IC	5.7V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C581A	-	VDA5810CTN	Vdet-IC	5.8V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C58LA	-	VDD5810LCTN	Vdet-IC	5.8V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C58MA	-	VDD5810MCTN	Vdet-IC	5.8V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C58SA	-	VDD5810SCTN	Vdet-IC	5.8V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C591A	-	VDA5910CTN	Vdet-IC	5.9V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C59LA	-	VDD5910LCTN	Vdet-IC	5.9V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C59MA	-	VDD5910MCTN	Vdet-IC	5.9V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C59SA	-	VDD5910SCTN	Vdet-IC	5.9V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
C6	-	AP8821C-26GI	Vdet-IC	2.6V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
C6	-	AP8821C-26GS	Vdet-IC	2.6V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
C6	-	AP8821C-26PI	Vdet-IC	2.6V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
C6	-	AP8821C-26PS	Vdet-IC	2.6V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
C6	-	R1140Q361B	LVR-IC	LDO, 3.6V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
C6	-	R1180Q361B	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
C6	-	R3114Q331A	Vdet-IC	3.3V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
C6	-	XC61CC2602N	Vdet-IC	2.6V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
C6	-	XC6223B161NR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
C6	-	XC6233H351NR-G	LVR-IC	LVO, 3.5V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
C601A	-	VDA6010CTN	Vdet-IC	6.0V±1%, -Reset PPO	SON-4	59vdl	VD7	5e	Ans
C60LA	-	VDD6010LCTN	Vdet-IC	6.0V±1%, -Reset PPO, 80..400ms	SON-4	59vdl	VD7	5e	Ans
C60MA	-	VDD6010MCTN	Vdet-IC	6.0V±1%, -Reset PPO, 50..200ms	SON-4	59vdl	VD7	5e	Ans
C60SA	-	VDD6010SCTN	Vdet-IC	6.0V±1%, -Reset PPO, 10..50ms	SON-4	59vdl	VD7	5e	Ans
c65	-	LN3526C2612M	Vdet-IC	2.6V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
c66	-	LN3526C2642M	Vdet-IC	2.6V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
c67	-	LN3526C2652M	Vdet-IC	2.6V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
C7	-	AP8821C-27GI	Vdet-IC	2.7V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
C7	-	AP8821C-27GS	Vdet-IC	2.7V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
C7	-	AP8821C-27PI	Vdet-IC	2.7V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
C7	-	AP8821C-27PS	Vdet-IC	2.7V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
C7	-	HSMS-2827	Si-diode	4x SBD, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-143	24	D1	5c	Agi
C7	-	R1140Q371B	LVR-IC	LDO, 3.7V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
C7	-	R3114Q341A	Vdet-IC	3.4V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
C7	-	XC61CC2702N	Vdet-IC	2.7V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
C7	-	XC6221B08BNR	LVR-IC	LDO, 0.85V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
C7	-	XC6223B171NR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
C7	-	XC6233H361NR-G	LVR-IC	LVO, 3.6V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
c75	-	LN3526C2712M	Vdet-IC	2.7V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
c76	-	LN3526C2742M	Vdet-IC	2.7V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
c77	-	LN3526C2752M	Vdet-IC	2.7V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
C8	-	AP8821C-28GI	Vdet-IC	2.8V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
C8	-	AP8821C-28GS	Vdet-IC	2.8V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
C8	-	AP8821C-28PI	Vdet-IC	2.8V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
C8	-	AP8821C-28PS	Vdet-IC	2.8V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
C8	-	HSMS-2828	Si-diode	4x SBD, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-143	24	D2	5c	Agi
C8	-	R1140Q381B	LVR-IC	LDO, 3.8V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
C8	-	R3114Q351A	Vdet-IC	3.5V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
C8	-	XC61CC2802N	Vdet-IC	2.8V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
C8	-	XC6221B09BNR	LVR-IC	LDO, 0.95V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
C8	-	XC6223B181NR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
c85	-	LN3526C2812M	Vdet-IC	2.8V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
c86	-	LN3526C2842M	Vdet-IC	2.8V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
c87	-	LN3526C2852M	Vdet-IC	2.8V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
C9	-	AP8821C-29GI	Vdet-IC	2.9V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
C9	-	AP8821C-29GS	Vdet-IC	2.9V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
C9	-	AP8821C-29PI	Vdet-IC	2.9V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
C9	-	AP8821C-29PS	Vdet-IC	2.9V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
C9	-	HSMS-2829	Si-diode	4x SBD, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-143	24	D3	5c	Agi
C9	-	R1140Q391B	LVR-IC	LDO, 3.9V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
C9	-	R3114Q361A	Vdet-IC	3.6V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C9	-	XC61CC2902N	Vdet-IC	2.9V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
C9	-	XC6221B10BNR	LVR-IC	LDO, 1.05V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
C9	-	XC6223B191NR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
c95	-	LN3526C2912M	Vdet-IC	2.9V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
C95	-	BCV64	Si-pnp	Dual, 30V, 100mA, 250mW, B=110..800, >100MHz	SOT-143	24t5	-	5c	Phi
c96	-	LN3526C2942M	Vdet-IC	2.9V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
C96	-	BCV64B	Si-pnp	Dual, 30V, 100mA, 250mW, B=110..800, >100MHz	SOT-143	24t5	-	5c	Phi
c97	-	LN3526C2952M	Vdet-IC	2.9V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
CA	-	MAX6314US38D1-T	Vdet-IC	3.8V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
CA	-	R1141Q301B	LVR-IC	LDO, 3.0V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
CA	-	R3112Q201A	Vdet-IC	2V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
CA	-	RP130Q301A	LVR-IC	LDO, LN, -CE, 3V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
CA	-	XC6127C15HNR	Vdet-IC	1.5V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CA	-	XC6127N16CNR	Vdet-IC	1.6V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CA	-	XC6221B11BNR	LVR-IC	LDO, 1.15V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CA	-	XC6223B201NR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CA9	-	LN61CC1002N	Vdet-IC	1.0V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAA	-	LN61CC1102N	Vdet-IC	1.1V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAB	-	LN61CC1202N	Vdet-IC	1.2V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAC	-	LN61CC1302N	Vdet-IC	1.3V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAD	-	LN61CC1402N	Vdet-IC	1.4V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAE	-	LN61CC1502N	Vdet-IC	1.5V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAF	-	LN61CC1602N	Vdet-IC	1.6V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAH	-	LN61CC1702N	Vdet-IC	1.7V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAK	-	LN61CC1802N	Vdet-IC	1.8V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAL	-	LN61CC1902N	Vdet-IC	1.9V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAM	-	LN61CC2002N	Vdet-IC	2.0V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAN	-	LN61CC2102N	Vdet-IC	2.1V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAP	-	LN61CC2202N	Vdet-IC	2.2V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAR	-	LN61CC2302N	Vdet-IC	2.3V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAS	-	LN61CC2402N	Vdet-IC	2.4V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAT	-	LN61CC2502N	Vdet-IC	2.5V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAU	-	LN61CC2602N	Vdet-IC	2.6V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAV	-	LN61CC2702N	Vdet-IC	2.7V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAX	-	LN61CC2802N	Vdet-IC	2.8V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAY	-	LN61CC2902N	Vdet-IC	2.9V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CAZ	-	LN61CC3002N	Vdet-IC	3.0V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CB	-	MAX6314US37D1-T	Vdet-IC	3.7V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
CB	-	R1141Q311B	LVR-IC	LDO, 3.1V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
CB	-	R3112Q211A	Vdet-IC	2.1V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
CB	-	RP130Q311A	LVR-IC	LDO, LN, -CE, 3.1V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
CB	-	XC6127C17HNR	Vdet-IC	1.7V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CB	-	XC6127N18CNR	Vdet-IC	1.8V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CB	-	XC6221B12BNR	LVR-IC	LDO, 1.25V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CB	-	XC6223B211NR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CB0	-	LN61CC3102N	Vdet-IC	3.1V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CB1	-	LN61CC3202N	Vdet-IC	3.2V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CB10	-	CBRHD10	Bridge	Rectifier, 1000V, 500mA, Vf<1V(400mA)	HD DIP	24	D5	5b	Cen
CB2	-	LN61CC3302N	Vdet-IC	3.3V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CB3	-	LN61CC3402N	Vdet-IC	3.4V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CB4	-	LN61CC3502N	Vdet-IC	3.5V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CB5	-	LN61CC3602N	Vdet-IC	3.6V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CB6	-	LN61CC3702N	Vdet-IC	3.7V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CB7	-	LN61CC3802N	Vdet-IC	3.8V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CB8	-	LN61CC3902N	Vdet-IC	3.9V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CB9	-	LN61CC4002N	Vdet-IC	4.0V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBA	-	LN61CC4102N	Vdet-IC	4.1V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBB	-	AME8570AE4UAF29Z	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Ame
CBB	-	LN61CC4202N	Vdet-IC	4.2V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBB	gg	AME8570AE4UAF29L	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR, lead free	SOT-143	24vdh	VD5	5g	Ame
CBC	-	LN61CC4302N	Vdet-IC	4.3V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBD	-	LN61CC4402N	Vdet-IC	4.4V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBD2	-	CBRHD02	Bridge	Rectifier, 200V, 500mA, Vf<1V(400mA)	HD DIP	24	D5	5b	Cen
CBD4	-	CBRHD04	Bridge	Rectifier, 400V, 500mA, Vf<1V(400mA)	HD DIP	24	D5	5b	Cen
CBD6	-	CBRHD06	Bridge	Rectifier, 600V, 500mA, Vf<1V(400mA)	HD DIP	24	D5	5b	Cen
CBE	-	LN61CC4502N	Vdet-IC	4.5V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBF	-	LN61CC4602N	Vdet-IC	4.6V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBH	-	LN61CC4702N	Vdet-IC	4.7V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBK	-	LN61CC4802N	Vdet-IC	4.8V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBL	-	LN61CC4902N	Vdet-IC	4.9V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CBM	-	LN61CC5002N	Vdet-IC	5.0V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBN	-	LN61CC5102N	Vdet-IC	5.1V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBP	-	LN61CC5202N	Vdet-IC	5.2V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBR	-	LN61CC5302N	Vdet-IC	5.3V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBR2	-	CMFBR-6F	Bridge	Rectifier, 60V, 140mA, Vf<1V(20mA)	SOT-143	24	D2	5b	Cen
CBS	-	LN61CC5402N	Vdet-IC	5.4V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBT	-	LN61CC5502N	Vdet-IC	5.5V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBU	-	LN61CC5602N	Vdet-IC	5.6V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBV	-	LN61CC5702N	Vdet-IC	5.7V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBX	-	LN61CC5802N	Vdet-IC	5.8V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBY	-	LN61CC5902N	Vdet-IC	5.9V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CBZ	-	LN61CC6002N	Vdet-IC	6.0V±2%, +Reset PPO	SOT-343R	26vdl	VD7	5c	Nln
CC	-	MAX6314US36D1-T	Vdet-IC	3.6V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
CC	-	R1141Q321B	LVR-IC	LDO, 3.2V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
CC	-	R3112Q221A	Vdet-IC	2.2V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
CC	-	RP130Q321A	LVR-IC	LDO, LN, -CE, 3.2V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
CC	-	XC6127C19HNR	Vdet-IC	1.9V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CC	-	XC6127N20CNR	Vdet-IC	2.0V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CC	-	XC6221B13BNR	LVR-IC	LDO, 1.35V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CC	-	XC6223B221NR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CD	-	MAX6314US35D1-T	Vdet-IC	3.5V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
CD	-	R1141Q331B	LVR-IC	LDO, 3.3V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
CD	-	R3112Q231A	Vdet-IC	2.3V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
CD	-	RP130Q331A	LVR-IC	LDO, LN, -CE, 3.3V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
CD	-	XC6127C21HNR	Vdet-IC	2.1V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CD	-	XC6127N22CNR	Vdet-IC	2.2V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CD	-	XC6221B14BNR	LVR-IC	LDO, 1.45V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CD	-	XC6223B231NR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CE	-	MAX6314US34D1-T	Vdet-IC	3.4V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
CE	-	R1141Q341B	LVR-IC	LDO, 3.4V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
CE	-	R3112Q241A	Vdet-IC	2.4V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
CE	-	RP130Q341A	LVR-IC	LDO, LN, -CE, 3.4V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
CE	-	XC6127C23HNR	Vdet-IC	2.3V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CE	-	XC6127N24CNR	Vdet-IC	2.4V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CE	-	XC6221B15BNR	LVR-IC	LDO, 1.55V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CE	-	XC6223B241NR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CF	-	MAX6314US33D1-T	Vdet-IC	3.3V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
CF	-	R1141Q351B	LVR-IC	LDO, 3.5V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
CF	-	R3112Q251A	Vdet-IC	2.5V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
CF	-	RP130Q351A	LVR-IC	LDO, LN, -CE, 3.5V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
CF	-	XC6127C25HNR	Vdet-IC	2.5V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CF	-	XC6127N26CNR	Vdet-IC	2.6V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CF	-	XC6221B16BNR	LVR-IC	LDO, 1.65V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CF	-	XC6223B251NR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CG	-	MAX6314US32D1-T	Vdet-IC	3.2V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
CG	-	R1141Q361B	LVR-IC	LDO, 3.6V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
CG	-	R3112Q261A	Vdet-IC	2.6V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
CG	-	RP130Q361A	LVR-IC	LDO, LN, -CE, 3.6V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
CH	-	MAX6314US31D1-T	Vdet-IC	3.08V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
CH	-	R1141Q371B	LVR-IC	LDO, 3.7V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
CH	-	R3112Q271A	Vdet-IC	2.7V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
CH	-	RP130Q371A	LVR-IC	LDO, LN, -CE, 3.7V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
CH	-	XC6127C27HNR	Vdet-IC	2.7V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CH	-	XC6127N28CNR	Vdet-IC	2.8V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CH	-	XC6221B17BNR	LVR-IC	LDO, 1.75V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CH	-	XC6223B261NR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CI	-	MAX6314US30D1-T	Vdet-IC	3.0V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
CJ	-	MAX6314US29D1-T	Vdet-IC	2.93V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
CJ	-	R1141Q381B	LVR-IC	LDO, 3.8V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
CJ	-	R3112Q281A	Vdet-IC	2.8V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
CJ	-	RP130Q381A	LVR-IC	LDO, LN, -CE, 3.8V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
CJP	-	BAW101	Si-diode	Dual, Sw, 300V, 200mA, Vf<1.3V(100mA), 50ns	SOT-143	24ce	-	5b	Cen
CJP	-	CMFD2004i	Si-diode	Dual, Sw, 240V, 200mA, 350mW, Vf<1V(100mA), <5pF	SOT-143	24ce	-	5b	Cen
CJSS	-	BAW100	Si-diode	Dual, Sw, 75V, 250mA, Vf<1.25V (150mA), 6ns	SOT-143	24dv	-	5b	Cen
CK	-	MAX6314US28D1-T	Vdet-IC	2.8V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
CK	-	R1141Q391B	LVR-IC	LDO, 3.9V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
CK	-	R3112Q291A	Vdet-IC	2.9V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
CK	-	RP130Q391A	LVR-IC	LDO, LN, -CE, 3.9V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
CK	-	XC6127C29HNR	Vdet-IC	2.9V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CK	-	XC6127N30CNR	Vdet-IC	3.0V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CK	-	XC6221B18BNR	LVR-IC	LDO, 1.85V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CK	-	XC6223B271NR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CL	-	FP6812-23CC4P	Vdet-IC	2.32V±1.5%, +Reset PPO, -MR	SC-70-4	23vdh	VD6	5b	Fit
CL	-	MAX6314US27D1-T	Vdet-IC	2.7V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
CL	-	R3112Q201C	Vdet-IC	2V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
CL	-	XC6127C31HNR	Vdet-IC	3.1V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CL	-	XC6127N32CNR	Vdet-IC	3.2V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CL	-	XC6221B19BNR	LVR-IC	LDO, 1.95V±20mV, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CL	-	XC6223B281NR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CM	-	FP6812-26CC4P	Vdet-IC	2.63V±1.5%, +Reset PPO, -MR	SC-70-4	23vdh	VD6	5b	Fit
CM	-	MAX6314US26D1-T	Vdet-IC	2.63V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
CM	-	R3112Q211C	Vdet-IC	2.1V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
CM	-	XC6127C33HNR	Vdet-IC	3.3V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CM	-	XC6127N34CNR	Vdet-IC	3.4V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CM	-	XC6221B20BNR	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CM	-	XC6223B291NR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CN	-	FP6812-29CC4P	Vdet-IC	2.93V±1.5%, +Reset PPO, -MR	SC-70-4	23vdh	VD6	5b	Fit
CN	-	MAX6314US25D1-T	Vdet-IC	2.5V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
CN	-	R3112Q221C	Vdet-IC	2.2V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
CN	-	XC6109C20AN	Vdet-IC	2.0V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
CN	-	XC6119C20ANR	Vdet-IC	2.0V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
CN	-	XC6127C35HNR	Vdet-IC	3.5V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CN	-	XC6127N36CNR	Vdet-IC	3.6V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CN	-	XC6221B21BNR	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CN3	-	2SC4855-3	Si-npn	VHF/UHF, 12V, 15mA, 80mW, B=60..120, 5GHz	CP4	26tu	-	5b	San
CN4	-	2SC4855-4	Si-npn	VHF/UHF, 12V, 15mA, 80mW, B=901..180, 5GHz	CP4	26tu	-	5b	San
CN5	-	2SC4855-5	Si-npn	VHF/UHF, 12V, 15mA, 80mW, B=60..120, 5GHz	CP4	26tu	-	5b	San
CN9	-	LN61CN1002N	Vdet-IC	1.0V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNA	-	LN61CN1102N	Vdet-IC	1.1V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNB	-	LN61CN1202N	Vdet-IC	1.2V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNC	-	LN61CN1302N	Vdet-IC	1.3V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CND	-	LN61CN1402N	Vdet-IC	1.4V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNE	-	LN61CN1502N	Vdet-IC	1.5V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNF	-	LN61CN1602N	Vdet-IC	1.6V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNH	-	LN61CN1702N	Vdet-IC	1.7V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNK	-	LN61CN1802N	Vdet-IC	1.8V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNL	-	LN61CN1902N	Vdet-IC	1.9V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNM	-	LN61CN2002N	Vdet-IC	2.0V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNN	-	LN61CN2102N	Vdet-IC	2.1V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNP	-	LN61CN2202N	Vdet-IC	2.2V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNR	-	LN61CN2302N	Vdet-IC	2.3V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNS	-	LN61CN2402N	Vdet-IC	2.4V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNT	-	LN61CN2502N	Vdet-IC	2.5V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNU	-	LN61CN2602N	Vdet-IC	2.6V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNV	-	LN61CN2702N	Vdet-IC	2.7V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNX	-	LN61CN2802N	Vdet-IC	2.8V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNY	-	LN61CN2902N	Vdet-IC	2.9V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CNZ	-	LN61CN3002N	Vdet-IC	3.0V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CO	-	2SC5087-O	Si-npn	VHF/UHF, LN, 20V, 80mA, 150mW, 7GHz, B=80..160	SMQ	26tu	-	5b	Tos
CO	-	MAX6314US50D2-T	Vdet-IC	5.0V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
CP	-	FP6812-31CC4P	Vdet-IC	3.08V±1.5%, +Reset PPO, -MR	SC-70-4	23vdh	VD6	5b	Fit
CP	-	MAX6314US49D2-T	Vdet-IC	4.9V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
CP	-	R3112Q231C	Vdet-IC	2.3V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
CP	-	XC6109C21AN	Vdet-IC	2.1V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
CP	-	XC6119C21ANR	Vdet-IC	2.1V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
CP	-	XC6127C37HNR	Vdet-IC	3.7V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CP	-	XC6127N38CNR	Vdet-IC	3.8V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CP	-	XC6221B22BNR	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CP0	-	LN61CN3102N	Vdet-IC	3.1V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CP1	-	LN61CN3202N	Vdet-IC	3.2V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CP2	-	LN61CN3302N	Vdet-IC	3.3V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CP3	-	LN61CN3402N	Vdet-IC	3.4V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CP4	-	LN61CN3502N	Vdet-IC	3.5V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CP5	-	LN61CN3602N	Vdet-IC	3.6V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CP6	-	LN61CN3702N	Vdet-IC	3.7V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CP7	-	LN61CN3802N	Vdet-IC	3.8V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CP8	-	LN61CN3902N	Vdet-IC	3.9V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CP9	-	LN61CN4002N	Vdet-IC	4.0V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPA	-	LN61CN4102N	Vdet-IC	4.1V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPB	-	LN61CN4202N	Vdet-IC	4.2V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CPC	-	LN61CN4302N	Vdet-IC	4.3V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPD	-	LN61CN4402N	Vdet-IC	4.4V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPE	-	LN61CN4502N	Vdet-IC	4.5V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPF	-	LN61CN4602N	Vdet-IC	4.6V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPH	-	LN61CN4702N	Vdet-IC	4.7V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPK	-	LN61CN4802N	Vdet-IC	4.8V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPL	-	LN61CN4902N	Vdet-IC	4.9V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPM	-	LN61CN5002N	Vdet-IC	5.0V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPN	-	LN61CN5102N	Vdet-IC	5.1V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPP	-	LN61CN5202N	Vdet-IC	5.2V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPR	-	LN61CN5302N	Vdet-IC	5.3V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPS	-	LN61CN5402N	Vdet-IC	5.4V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPT	-	LN61CN5502N	Vdet-IC	5.5V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPU	-	LN61CN5602N	Vdet-IC	5.6V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPV	-	LN61CN5702N	Vdet-IC	5.7V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPX	-	LN61CN5802N	Vdet-IC	5.8V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPY	-	LN61CN5902N	Vdet-IC	5.9V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CPZ	-	LN61CN6002N	Vdet-IC	6.0V±2%, +Reset ODO	SOT-343R	26vdl	VD6	5c	Nln
CQ	-	MAX6314US48D2-T	Vdet-IC	4.8V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
CQ	-	R3112Q241C	Vdet-IC	2.4V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
CR	-	FP6812-40CC4P	Vdet-IC	4.0V±1.5%, +Reset PPO, -MR	SC-70-4	23vdh	VD6	5b	Fit
CR	-	MAX6314US47D2-T	Vdet-IC	4.7V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
CR	-	R3112Q251C	Vdet-IC	2.5V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
CR	-	XC6109C22AN	Vdet-IC	2.2V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
CR	-	XC6119C22ANR	Vdet-IC	2.2V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
CR	-	XC6127C39HNR	Vdet-IC	3.9V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CR	-	XC6127N40CNR	Vdet-IC	4.0V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CR	-	XC6221B23BNR	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CS	-	FP6812-44CC4P	Vdet-IC	4.38V±1.5%, +Reset PPO, -MR	SC-70-4	23vdh	VD6	5b	Fit
CS	-	MAX6314US46D2-T	Vdet-IC	4.63V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
CS	-	R3112Q261C	Vdet-IC	2.6V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
CS	-	XC6109C23AN	Vdet-IC	2.3V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
CS	-	XC6119C23ANR	Vdet-IC	2.3V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
CS	-	XC6127C41HNR	Vdet-IC	4.1V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CS	-	XC6127N42CNR	Vdet-IC	4.2V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CS	-	XC6221B24BNR	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CT	-	FP6812-46CC4P	Vdet-IC	4.63V±1.5%, +Reset PPO, -MR	SC-70-4	23vdh	VD6	5b	Fit
CT	-	MAX6314US45D2-T	Vdet-IC	4.5V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
CT	-	R3112Q271C	Vdet-IC	2.7V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
CT	-	XC6109C24AN	Vdet-IC	2.4V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
CT	-	XC6119C24ANR	Vdet-IC	2.4V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
CT	-	XC6127C43HNR	Vdet-IC	4.3V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CT	-	XC6127N44CNR	Vdet-IC	4.4V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CT	-	XC6221B25BNR	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CU	-	MAX6314US44D2-T	Vdet-IC	4.39V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
CU	-	R3112Q281C	Vdet-IC	2.8V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
CU	-	XC6109C25AN	Vdet-IC	2.5V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
CU	-	XC6119C25ANR	Vdet-IC	2.5V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
CU	-	XC6127C45HNR	Vdet-IC	4.5V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CU	-	XC6127N46CNR	Vdet-IC	4.6V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CU	-	XC6221B26BNR	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CUA	-	S-817A11ANB-CUAT2G	LVR-IC	1.1V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUA	-	S-817A11APF-CUATFG	LVR-IC	1.1V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUB	-	S-817A12ANB-CUBT2G	LVR-IC	1.2V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUB	-	S-817A12APF-CUBTFG	LVR-IC	1.2V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUC	-	S-817A13ANB-CUCT2G	LVR-IC	1.3V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUC	-	S-817A13APF-CUCTFG	LVR-IC	1.3V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUD	-	S-817A14ANB-CUDT2G	LVR-IC	1.4V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUD	-	S-817A14APF-CUDTFG	LVR-IC	1.4V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUE	-	S-817A15ANB-CUET2G	LVR-IC	1.5V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUE	-	S-817A15APF-CUETFG	LVR-IC	1.5V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUF	-	S-817A16ANB-CUFT2G	LVR-IC	1.6V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUF	-	S-817A16APF-CUFTFG	LVR-IC	1.6V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUG	-	S-817A17ANB-CUGT2G	LVR-IC	1.7V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUG	-	S-817A17APF-CUGTFG	LVR-IC	1.7V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUH	-	S-817A18ANB-CUHT2G	LVR-IC	1.8V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUH	-	S-817A18APF-CUHTFG	LVR-IC	1.8V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUI	-	S-817A19ANB-CUIT2G	LVR-IC	1.9V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUI	-	S-817A19APF-CUITFG	LVR-IC	1.9V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUJ	-	S-817A20ANB-CUJT2G	LVR-IC	2.0V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CUJ	-	S-817A20APF-CUJTFG	LVR-IC	2.0V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUK	-	S-817A21ANB-CUKTFG	LVR-IC	2.1V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUK	-	S-817A21APF-CUKTFG	LVR-IC	2.1V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUL	-	S-817A22ANB-CULTFG	LVR-IC	2.2V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUL	-	S-817A22APF-CULTFG	LVR-IC	2.2V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUM	-	S-817A23ANB-CUMT2G	LVR-IC	2.3V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUM	-	S-817A23APF-CUMTFG	LVR-IC	2.3V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUN	-	S-817A24ANB-CUNT2G	LVR-IC	2.4V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUN	-	S-817A24APF-CUNTFG	LVR-IC	2.4V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUO	-	S-817A25ANB-CUOT2G	LVR-IC	2.5V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUO	-	S-817A25APF-CUOTFG	LVR-IC	2.5V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUP	-	S-817A26ANB-CUPT2G	LVR-IC	2.6V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUP	-	S-817A26APF-CUPTFG	LVR-IC	2.6V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUQ	-	S-817A27ANB-CUQT2G	LVR-IC	2.7V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUQ	-	S-817A27APF-CUQTFG	LVR-IC	2.7V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUR	-	S-817A28ANB-CURT2G	LVR-IC	2.8V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUR	-	S-817A28APF-CURTFG	LVR-IC	2.8V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUS	-	S-817A29ANB-CUST2G	LVR-IC	2.9V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUS	-	S-817A29APF-CUSTFG	LVR-IC	2.9V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUT	-	S-817A30ANB-CUTT2G	LVR-IC	3.0V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUT	-	S-817A30APF-CUTTFG	LVR-IC	3.0V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUU	-	S-817A31ANB-CUUT2G	LVR-IC	3.1V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUU	-	S-817A31APF-CUUTFG	LVR-IC	3.1V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUV	-	S-817A32ANB-CUVT2G	LVR-IC	3.2V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUV	-	S-817A32APF-CUVTFG	LVR-IC	3.2V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUW	-	S-817A33ANB-CUWT2G	LVR-IC	3.3V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUW	-	S-817A33APF-CUWTFG	LVR-IC	3.3V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUX	-	S-817A34ANB-CUXT2G	LVR-IC	3.4V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUX	-	S-817A34APF-CUXTFG	LVR-IC	3.4V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUY	-	S-817A35ANB-CUYT2G	LVR-IC	3.5V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUY	-	S-817A35APF-CUYTFG	LVR-IC	3.5V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CUZ	-	S-817A36ANB-CUZT2G	LVR-IC	3.6V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CUZ	-	S-817A36APF-CUZTFG	LVR-IC	3.6V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CV	-	MAX6314US43D2-T	Vdet-IC	4.3V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
CV	-	R3112Q291C	Vdet-IC	2.9V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
CV	-	XC6109C26AN	Vdet-IC	2.6V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
CV	-	XC6119C26ANR	Vdet-IC	2.6V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
CV	-	XC6127C47HNR	Vdet-IC	4.7V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CV	-	XC6127N48CNR	Vdet-IC	4.8V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CV	-	XC6221B27BNR	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CVA	-	S-817A37ANB-CVAT2G	LVR-IC	3.7V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CVA	-	S-817A37APF-CVATFG	LVR-IC	3.7V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CVB	-	S-817A38ANB-CVBT2G	LVR-IC	3.8V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CVB	-	S-817A38APF-CVBTFG	LVR-IC	3.8V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CVC	-	S-817A39ANB-CVCT2G	LVR-IC	3.9V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CVC	-	S-817A39APF-CVCTFG	LVR-IC	3.9V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CVD	-	S-817A40ANB-CVDT2G	LVR-IC	4.0V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CVD	-	S-817A40APF-CVDTFG	LVR-IC	4.0V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CVE	-	S-817A41ANB-CVET2G	LVR-IC	4.1V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CVE	-	S-817A41APF-CVETFG	LVR-IC	4.1V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CVF	-	S-817A42ANB-CVFT2G	LVR-IC	4.2V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CVF	-	S-817A42APF-CVFTFG	LVR-IC	4.2V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CVG	-	S-817A43ANB-CVGT2G	LVR-IC	4.3V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CVG	-	S-817A43APF-CVGTFG	LVR-IC	4.3V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CVH	-	S-817A44ANB-CVHT2G	LVR-IC	4.4V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CVH	-	S-817A44APF-CVHTFG	LVR-IC	4.4V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CVI	-	S-817A45ANB-CVIT2G	LVR-IC	4.5V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CVI	-	S-817A45APF-CVITFG	LVR-IC	4.5V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CVJ	-	S-817A46ANB-CVJT2G	LVR-IC	4.6V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CVJ	-	S-817A46APF-CVJTFG	LVR-IC	4.6V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CVK	-	S-817A47ANB-CVKT2G	LVR-IC	4.7V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CVK	-	S-817A47APF-CVKTFG	LVR-IC	4.7V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CVL	-	S-817A48ANB-CVLT2G	LVR-IC	4.8V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CVL	-	S-817A48APF-CVLTFG	LVR-IC	4.8V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CVM	-	S-817A49ANB-CVMT2G	LVR-IC	4.9V±2%, 50mA	SC-82AB	26vs	VR1	5e	Sii
CVM	-	S-817A49APF-CVMTFG	LVR-IC	4.9V±2%, 50mA	SNT-4A	42rw	VR1	5e	Sii
CVN	-	S-817A50ANB-CVNT2G	LVR-IC	5.0V±2%, 75mA	SC-82AB	26vs	VR1	5e	Sii
CVN	-	S-817A50APF-CVNTFG	LVR-IC	5.0V±2%, 75mA	SNT-4A	42rw	VR1	5e	Sii
CVO	-	S-817A51ANB-CVOT2G	LVR-IC	5.1V±2%, 75mA	SC-82AB	26vs	VR1	5e	Sii
CVO	-	S-817A51APF-CVOTFG	LVR-IC	5.1V±2%, 75mA	SNT-4A	42rw	VR1	5e	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CVP	-	S-817A52ANB-CVPT2G	LVR-IC	5.2V±2%, 75mA	SC-82AB	26vs	VR1	5e	Sii
CVP	-	S-817A52APF-CVPTFG	LVR-IC	5.2V±2%, 75mA	SNT-4A	42rw	VR1	5e	Sii
CVQ	-	S-817A53ANB-CVQT2G	LVR-IC	5.3V±2%, 75mA	SC-82AB	26vs	VR1	5e	Sii
CVQ	-	S-817A53APF-CVQTFG	LVR-IC	5.3V±2%, 75mA	SNT-4A	42rw	VR1	5e	Sii
CVR	-	S-817A54ANB-CVRT2G	LVR-IC	5.4V±2%, 75mA	SC-82AB	26vs	VR1	5e	Sii
CVR	-	S-817A54APF-CVRTFG	LVR-IC	5.4V±2%, 75mA	SNT-4A	42rw	VR1	5e	Sii
CVS	-	S-817A55ANB-CVST2G	LVR-IC	5.5V±2%, 75mA	SC-82AB	26vs	VR1	5e	Sii
CVS	-	S-817A55APF-CVSTFG	LVR-IC	5.5V±2%, 75mA	SNT-4A	42rw	VR1	5e	Sii
CVT	-	S-817A56ANB-CVTT2G	LVR-IC	5.6V±2%, 75mA	SC-82AB	26vs	VR1	5e	Sii
CVT	-	S-817A56APF-CVTTFG	LVR-IC	5.6V±2%, 75mA	SNT-4A	42rw	VR1	5e	Sii
CVU	-	S-817A57ANB-CVUT2G	LVR-IC	5.7V±2%, 75mA	SC-82AB	26vs	VR1	5e	Sii
CVU	-	S-817A57APF-CVUTFG	LVR-IC	5.7V±2%, 75mA	SNT-4A	42rw	VR1	5e	Sii
CVV	-	S-817A58ANB-CVVT2G	LVR-IC	5.8V±2%, 75mA	SC-82AB	26vs	VR1	5e	Sii
CVV	-	S-817A58APF-CVVTFG	LVR-IC	5.8V±2%, 75mA	SNT-4A	42rw	VR1	5e	Sii
CVW	-	S-817A59ANB-CVWT2G	LVR-IC	5.9V±2%, 75mA	SC-82AB	26vs	VR1	5e	Sii
CVW	-	S-817A59APF-CVWTFG	LVR-IC	5.9V±2%, 75mA	SNT-4A	42rw	VR1	5e	Sii
CVX	-	S-817A60ANB-CVXT2G	LVR-IC	6.0V±2%, 75mA	SC-82AB	26vs	VR1	5e	Sii
CVX	-	S-817A60APF-CVXTFG	LVR-IC	6.0V±2%, 75mA	SNT-4A	42rw	VR1	5e	Sii
CW	-	MAX6314US42D2-T	Vdet-IC	4.2V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
CX	-	3SK227	n-MOSFET	Dual gate, UHF-amp, 15V, ±30mA, 200mW, Idss=6..25mA	SOT-143	26fm	-	5b	Pan
CX	-	3SK271	n-MOSFET	Dual gate, UHF-amp, 15V, ±30mA, 150mW, Idss=mA	SOT-343	26fm	-	5b	Pan
CX	-	MAX6314US41D2-T	Vdet-IC	4.1V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
CX	-	XC6109C27AN	Vdet-IC	2.7V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
CX	-	XC6119C27ANR	Vdet-IC	2.7V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
CX	-	XC6127C49HNR	Vdet-IC	4.9V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CX	-	XC6127N50CNR	Vdet-IC	5.0V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CX	-	XC6221B28BNR	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CY	-	2SC5087-Y	Si-npn	VHF/UHF, LN, 20V, 80mA, 150mW, 7GHz, B=120..240	SMQ	26tu	-	5b	Tos
CY	-	MAX6314US40D2-T	Vdet-IC	4.0V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
CY	-	XC6109C28AN	Vdet-IC	2.8V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
CY	-	XC6119C28ANR	Vdet-IC	2.8V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
CY	-	XC6127C51HNR	Vdet-IC	5.1V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CY	-	XC6127N52CNR	Vdet-IC	5.2V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CY	-	XC6221B29BNR	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
CZ	-	MAX6314US39D2-T	Vdet-IC	3.9V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
CZ	-	XC6109C29AN	Vdet-IC	2.9V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
CZ	-	XC6119C29ANR	Vdet-IC	2.9V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
CZ	-	XC6127C53HNR	Vdet-IC	5.3V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
CZ	-	XC6127N54CNR	Vdet-IC	5.4V±0.8%, -Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
CZ	-	XC6221B30BNR	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
D	-	3SK304	n-MOSFET	Dual gate, UHF-amp, 15V, ±30mA, 150mW, Idss=0..10mA	SOT-143	26fm	-	5b	Pan
D	-	3SK308	n-MOSFET	Dual gate, UHF-amp, 15V, ±30mA, 150mW, Idss=0..10mA	SOT-343	26fm	-	5b	Pan
D	gc	ELM7525NCB	Vdet-IC	2.5V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
D	gd	ELM7525CCB	Vdet-IC	2.5V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
D0	-	AP8821C-30GI	Vdet-IC	3.0V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
D0	-	AP8821C-30GS	Vdet-IC	3.0V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
D0	-	AP8821C-30PI	Vdet-IC	3.0V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
D0	-	AP8821C-30PS	Vdet-IC	3.0V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
D0	-	R1140Q401B	LVR-IC	LDO, 4.0V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
D0	-	R3114Q371A	Vdet-IC	3.7V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
D0	-	XC6127C55JNR	Vdet-IC	5.5V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
D0	-	XC61CC3002N	Vdet-IC	3.0V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
D0	-	XC6221A311NR	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
d05	-	LN3526C3012M	Vdet-IC	3.0V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
d06	-	LN3526C3042M	Vdet-IC	3.0V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
d07	-	LN3526C3052M	Vdet-IC	3.0V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
D1	-	AP8821C-31GI	Vdet-IC	3.1V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
D1	-	AP8821C-31GS	Vdet-IC	3.1V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
D1	-	AP8821C-31PI	Vdet-IC	3.1V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
D1	-	AP8821C-31PS	Vdet-IC	3.1V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
D1	-	R3114Q381A	Vdet-IC	3.8V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
D1	-	SST211	n-MOSFET	Sw, 30V, 50mA, 360mW, Rds=7Ω, 0.7/10ns	SOT-143	24fx	-	5b	Six
D1	-	XC61CC3102N	Vdet-IC	3.1V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
D1	-	XC6221A321NR	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
D1	-	XC6233H12BNR-G	LVR-IC	LVO, 1.25V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
D11	-	SST211	n-MOSFET	Sw, 30V, 50mA, 360mW, Rds=7Ω, 0.7/10ns	SOT-143	24fx	-	5b	Lns
D13	-	SST213	n-MOSFET	Sw, 10V, 50mA, 360mW, Rds=7Ω, 0.7/10ns	SOT-143	24fx	-	5b	Lns
d15	-	LN3526C3112M	Vdet-IC	3.1V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
D15	-	SST215	n-MOSFET	Sw, 20V, 50mA, 360mW, Rds=7Ω, 0.7/10ns	SOT-143	24fx	-	5b	Lns
d16	-	LN3526C3142M	Vdet-IC	3.1V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
d17	-	LN3526C3152M	Vdet-IC	3.1V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
D2	-	AP8821C-32GI	Vdet-IC	3.2V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
D2	-	AP8821C-32GS	Vdet-IC	3.2V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
D2	-	AP8821C-32PI	Vdet-IC	3.2V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
D2	-	AP8821C-32PS	Vdet-IC	3.2V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
D2	-	R1180Q121C	LVR-IC	LDO, 1.2V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
D2	-	R3114Q391A	Vdet-IC	3.9V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
D2	-	XC61CC3202N	Vdet-IC	3.2V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
D2	-	XC6221A331NR	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
D2	-	XC6223C121NR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
D2	-	XC6233H13BNR-G	LVR-IC	LVO, 1.35V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
d25	-	LN3526C3212M	Vdet-IC	3.2V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
d26	-	LN3526C3242M	Vdet-IC	3.2V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
d27	-	LN3526C3252M	Vdet-IC	3.2V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
D3	-	AP8821C-33GI	Vdet-IC	3.3V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
D3	-	AP8821C-33GS	Vdet-IC	3.3V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
D3	-	AP8821C-33PI	Vdet-IC	3.3V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
D3	-	AP8821C-33PS	Vdet-IC	3.3V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
D3	-	R1180Q131C	LVR-IC	LDO, 1.3V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
D3	-	R3114Q401A	Vdet-IC	4V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
D3	-	SST213	n-MOSFET	Sw, 10V, 50mA, 360mW, Rds=7Ω, 0.7/10ns	SOT-143	24fx	-	5b	Six
D3	-	XC61CC3302N	Vdet-IC	3.3V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
D3	-	XC6221A341NR	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
D3	-	XC6223C131NR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
D3	-	XC6233H14BNR-G	LVR-IC	LVO, 1.45V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
d35	-	LN3526C3312M	Vdet-IC	3.3V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
d36	-	LN3526C3342M	Vdet-IC	3.3V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
d37	-	LN3526C3352M	Vdet-IC	3.3V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
D4	-	AP8821C-34GI	Vdet-IC	3.4V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
D4	-	AP8821C-34GS	Vdet-IC	3.4V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
D4	-	AP8821C-34PI	Vdet-IC	3.4V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
D4	-	AP8821C-34PS	Vdet-IC	3.4V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
D4	-	R1180Q141C	LVR-IC	LDO, 1.4V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
D4	-	R3114Q411A	Vdet-IC	4.1V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
D4	-	XC61CC3402N	Vdet-IC	3.4V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
D4	-	XC6221A351NR	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
D4	-	XC6223C141NR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
D4	-	XC6233H15BNR-G	LVR-IC	LVO, 1.55V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
d45	-	LN3526C3412M	Vdet-IC	3.4V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
d46	-	LN3526C3442M	Vdet-IC	3.4V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
d47	-	LN3526C3452M	Vdet-IC	3.4V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
D5	-	AP8821C-35GI	Vdet-IC	3.5V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
D5	-	AP8821C-35GS	Vdet-IC	3.5V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
D5	-	AP8821C-35PI	Vdet-IC	3.5V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
D5	-	AP8821C-35PS	Vdet-IC	3.5V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
D5	-	R1180Q151C	LVR-IC	LDO, 1.5V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
D5	-	R3114Q421A	Vdet-IC	4.2V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
D5	-	SST215	n-MOSFET	Sw, 20V, 50mA, 360mW, Rds=7Ω, 0.7/10ns	SOT-143	24fx	-	5b	Six
D5	-	XC61CC3502N	Vdet-IC	3.5V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
D5	-	XC6221A361NR	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
D5	-	XC6223C151NR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
D5	-	XC6233H16BNR-G	LVR-IC	LVO, 1.65V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
d55	-	LN3526C3512M	Vdet-IC	3.5V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
d56	-	LN3526C3542M	Vdet-IC	3.5V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
d57	-	LN3526C3552M	Vdet-IC	3.5V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
D6	-	AP8821C-36GI	Vdet-IC	3.6V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
D6	-	AP8821C-36GS	Vdet-IC	3.6V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
D6	-	AP8821C-36PI	Vdet-IC	3.6V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
D6	-	AP8821C-36PS	Vdet-IC	3.6V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
D6	-	R1180Q161C	LVR-IC	LDO, 1.6V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
D6	-	R3114Q431A	Vdet-IC	4.3V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
D6	-	XC61CC3602N	Vdet-IC	3.6V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
D6	-	XC6221A371NR	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
D6	-	XC6223C161NR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
D6	-	XC6233H17BNR-G	LVR-IC	LVO, 1.75V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
d65	-	LN3526C3612M	Vdet-IC	3.6V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
d66	-	LN3526C3642M	Vdet-IC	3.6V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
d67	-	LN3526C3652M	Vdet-IC	3.6V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
D7	-	AP8821C-37GI	Vdet-IC	3.7V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
D7	-	AP8821C-37GS	Vdet-IC	3.7V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D7	-	AP8821C-37PI	Vdet-IC	3.7V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
D7	-	AP8821C-37PS	Vdet-IC	3.7V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
D7	-	R1180Q171C	LVR-IC	LDO, 1.7V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
D7	-	R3114Q441A	Vdet-IC	4.4V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
D7	-	XC61CC3702N	Vdet-IC	3.7V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
D7	-	XC6221A381NR	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
D7	-	XC6223C171NR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
D7	-	XC6233H18BNR-G	LVR-IC	LVO, 1.85V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
d75	-	LN3526C3712M	Vdet-IC	3.7V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
d76	-	LN3526C3742M	Vdet-IC	3.7V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
d77	-	LN3526C3752M	Vdet-IC	3.7V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
D8	-	AP8821C-38GI	Vdet-IC	3.8V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
D8	-	AP8821C-38GS	Vdet-IC	3.8V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
D8	-	AP8821C-38PI	Vdet-IC	3.8V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
D8	-	AP8821C-38PS	Vdet-IC	3.8V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
D8	-	R1180Q181C	LVR-IC	LDO, 1.8V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
D8	-	R3114Q451A	Vdet-IC	4.5V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
D8	-	XC61CC3802N	Vdet-IC	3.8V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
D8	-	XC6221A391NR	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
D8	-	XC6223C181NR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
D8	-	XC6233H19BNR-G	LVR-IC	LVO, 1.95V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
d85	-	LN3526C3812M	Vdet-IC	3.8V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
d86	-	LN3526C3842M	Vdet-IC	3.8V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
d87	-	LN3526C3852M	Vdet-IC	3.8V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
D89	-	BAT74	Si-diode	Dual, Sw, 30V, 200mA, 250mW, Vf<0.9V(0.1A), <5ns	SOT-143B	24ce	-	5b	Ste
D9	-	AP8821C-39GI	Vdet-IC	3.9V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
D9	-	AP8821C-39GS	Vdet-IC	3.9V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
D9	-	AP8821C-39PI	Vdet-IC	3.9V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
D9	-	AP8821C-39PS	Vdet-IC	3.9V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
D9	-	R1180Q191C	LVR-IC	LDO, 1.9V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
D9	-	R3114Q461A	Vdet-IC	4.6V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
D9	-	XC61CC3902N	Vdet-IC	3.9V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
D9	-	XC6221A401NR	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
D9	-	XC6223C191NR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
D9	-	XC6233H20BNR-G	LVR-IC	LVO, 2.05V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
d95	-	LN3526C3912M	Vdet-IC	3.9V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
D95	-	BCV63	Si-npn	Dual, 30V, 100mA, 250mW, B=110..800, >100MHz	SOT-143	24t5	-	5c	Phi
d96	-	LN3526C3942M	Vdet-IC	3.9V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
D96	-	BCV63B	Si-npn	Dual, 30V, 100mA, 250mW, B=200..450, >100MHz	SOT-143	24t5	-	5c	Phi
d97	-	LN3526C3952M	Vdet-IC	3.9V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
DA	-	MAX6314US38D2-T	Vdet-IC	3.8V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
DA	-	R1141Q401B	LVR-IC	LDO, 4.0V±2%, 120mA, +CE	SOT-143R	26vm	VR4	5m	Ric
DA	-	R3112Q301A	Vdet-IC	3V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
DA	-	RP130Q401A	LVR-IC	LDO, LN, -CE, 4V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
DA	-	XC6127C15JNR	Vdet-IC	1.5V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DA	-	XC6127N16DNR	Vdet-IC	1.6V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DA	-	XC6223C201NR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
DA	-	XC6501B121NR-G	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DB	-	MAX6314US37D2-T	Vdet-IC	3.7V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
DB	-	R3112Q311A	Vdet-IC	3.1V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
DB	-	RP130Q411A	LVR-IC	LDO, LN, -CE, 4.1V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
DB	-	XC6127C17JNR	Vdet-IC	1.7V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DB	-	XC6127N18DNR	Vdet-IC	1.8V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DB	-	XC6223C211NR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
DB	-	XC6501B12ANR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DC	-	MAX6314US36D2-T	Vdet-IC	3.6V±1.8%, -MR, -Reset Bidir, PPO, 1ms	SOT-143	24vdh	VD5	5c	Max
DC	-	R3112Q321A	Vdet-IC	3.2V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
DC	-	RP130Q421A	LVR-IC	LDO, LN, -CE, 4.2V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
DC	-	XC6127C19JNR	Vdet-IC	1.9V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DC	-	XC6127N20DNR	Vdet-IC	2.0V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DC	-	XC6223C221NR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
DC	-	XC6501B131NR-G	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DD	-	MAX6314US35D2-T	Vdet-IC	3.5V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
DD	-	R3112Q331A	Vdet-IC	3.3V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
DD	-	RP130Q431A	LVR-IC	LDO, LN, -CE, 4.3V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
DD	-	XC6127C21JNR	Vdet-IC	2.1V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DD	-	XC6127N22DNR	Vdet-IC	2.2V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DD	-	XC6223C231NR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
DD	-	XC6501B13ANR-G	LVR-IC	LDO, 1.35V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DE	-	MAX6314US34D2-T	Vdet-IC	3.4V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DE	-	R3112Q341A	Vdet-IC	3.4V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
DE	-	RP130Q441A	LVR-IC	LDO, LN, -CE, 4.4V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
DE	-	XC6127C23JNR	Vdet-IC	2.3V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DE	-	XC6127N24DNR	Vdet-IC	2.4V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DE	-	XC6223C241NR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
DE	-	XC6501B141NR-G	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DF	-	R3112Q351A	Vdet-IC	3.5V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
DF	-	RP130Q451A	LVR-IC	LDO, LN, -CE, 4.5V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
DF	-	XC6127C25JNR	Vdet-IC	2.5V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DF	-	XC6127N26DNR	Vdet-IC	2.6V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DF	-	XC6223C251NR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
DF	-	XC6501B14ANR-G	LVR-IC	LDO, 1.45V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DG	-	R3112Q361A	Vdet-IC	3.6V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
DG	-	RP130Q461A	LVR-IC	LDO, LN, -CE, 4.6V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
DH	-	R3112Q371A	Vdet-IC	3.7V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
DH	-	RP130Q471A	LVR-IC	LDO, LN, -CE, 4.7V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
DH	-	XC6127C27JNR	Vdet-IC	2.7V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DH	-	XC6127N28DNR	Vdet-IC	2.8V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DH	-	XC6223C261NR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
DH	-	XC6501B151NR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DJ	-	MAX6314US33D2-T	Vdet-IC	3.3V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
DJ	-	R3112Q381A	Vdet-IC	3.8V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
DJ	-	RP130Q481A	LVR-IC	LDO, LN, -CE, 4.8V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
DJ4	-	3SK180-4	n-FET	Dual gate, FM/VHF, 15V, 30mA, 200mW, Idss=1.5..6mA	SOT-143	26fm	-	5b	San
DJ5	-	3SK180-5	n-FET	Dual gate, FM/VHF, 15V, 30mA, 200mW, Idss=5..12mA	SOT-143	26fm	-	5b	San
DJ6	-	3SK180-6	n-FET	Dual gate, FM/VHF, 15V, 30mA, 200mW, Idss=10..24mA	SOT-143	26fm	-	5b	San
DK	-	MAX6314US32D2-T	Vdet-IC	3.2V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
DK	-	R3112Q391A	Vdet-IC	3.9V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
DK	-	RP130Q491A	LVR-IC	LDO, LN, -CE, 4.9V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
DK	-	XC6127C29JNR	Vdet-IC	2.9V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DK	-	XC6127N30DNR	Vdet-IC	3.0V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DK	-	XC6223C271NR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
DK	-	XC6501B15ANR-G	LVR-IC	LDO, 1.55V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DL	-	MAX6314US31D2-T	Vdet-IC	3.08V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
DL	-	R3112Q301C	Vdet-IC	3V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
DL	-	XC6127C31JNR	Vdet-IC	3.1V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DL	-	XC6127N32DNR	Vdet-IC	3.2V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DL	-	XC6223C281NR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
DL	-	XC6501B161NR-G	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DM	-	MAX6314US30D2-T	Vdet-IC	3.0V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
DM	-	R3112Q311C	Vdet-IC	3.1V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
DM	-	XC6127C33JNR	Vdet-IC	3.3V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DM	-	XC6127N34DNR	Vdet-IC	3.4V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DM	-	XC6223C291NR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
DM	-	XC6501B16ANR-G	LVR-IC	LDO, 1.65V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DN	-	AAT3526ICX-2.63-200	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5i	Ant
DN	-	MAX6314US29D2-T	Vdet-IC	2.93V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
DN	-	R3112Q321C	Vdet-IC	3.2V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
DN	-	XC6109C30AN	Vdet-IC	3.0V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
DN	-	XC6119C30ANR	Vdet-IC	3.0V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
DN	-	XC6127C35JNR	Vdet-IC	3.5V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DN	-	XC6127N36DNR	Vdet-IC	3.6V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DN	-	XC6501B171NR-G	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DO	-	2SC5092-O	Si-npn	VHF/UHF, LN, 20V, 40mA, 150mW, 10GHz, B=80..160	SMQ	26tu	-	5b	Tos
DO	-	AAT3526ICX-2.93-200	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5i	Ant
DO	-	MAX6314US28D2-T	Vdet-IC	2.8V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
DP	-	AAT3526ICX-4.63-200	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5i	Ant
DP	-	MAX6314US27D2-T	Vdet-IC	2.7V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
DP	-	R3112Q331C	Vdet-IC	3.3V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
DP	-	XC6109C31AN	Vdet-IC	3.1V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
DP	-	XC6119C31ANR	Vdet-IC	3.1V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
DP	-	XC6127C37JNR	Vdet-IC	3.7V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DP	-	XC6127N38DNR	Vdet-IC	3.8V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DP	-	XC6501B17ANR-G	LVR-IC	LDO, 1.75V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DQ	-	AAT3527ICX-2.93-200	Vdet-IC	2.93V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5i	Ant
DQ	-	MAX6314US26D2-T	Vdet-IC	2.63V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max
DQ	-	R3112Q341C	Vdet-IC	3.4V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
DR	-	2SC5092-R	Si-npn	VHF/UHF, LN, 20V, 40mA, 150mW, 10GHz, B=50..100	SMQ	26tu	-	5b	Tos
DR	-	AAT3528ICX-2.63-200	Vdet-IC	2.63V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5i	Ant
DR	-	MAX6314US25D2-T	Vdet-IC	2.5V±1.8%, -MR, -Reset Bidir, PPO, 20ms	SOT-143	24vdh	VD5	5c	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DR	-	R3112Q351C	Vdet-IC	3.5V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
DR	-	XC6109C32AN	Vdet-IC	3.2V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
DR	-	XC6119C32ANR	Vdet-IC	3.2V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
DR	-	XC6127C39JNR	Vdet-IC	3.9V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DR	-	XC6127N40DNR	Vdet-IC	4.0V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DR	-	XC6501B181NR-G	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DS	-	MAX6314US50D3-T	Vdet-IC	5.0V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
DS	-	R3112Q361C	Vdet-IC	3.6V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
DS	-	XC6109C33AN	Vdet-IC	3.3V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
DS	-	XC6119C33ANR	Vdet-IC	3.3V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
DS	-	XC6127C41JNR	Vdet-IC	4.1V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DS	-	XC6127N42DNR	Vdet-IC	4.2V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DS	-	XC6501B18ANR-G	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DT	-	MAX6314US49D3-T	Vdet-IC	4.9V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
DT	-	R3112Q371C	Vdet-IC	3.7V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
DT	-	XC6109C34AN	Vdet-IC	3.4V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
DT	-	XC6119C34ANR	Vdet-IC	3.4V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
DT	-	XC6127C43JNR	Vdet-IC	4.3V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DT	-	XC6127N44DNR	Vdet-IC	4.4V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DT	-	XC6501B191NR-G	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DU	-	3SK241	n-FET	GaAs, Dual gate, VHF/UHF, 13V, 50mA, Idss=8.5..35mA, Up<-3.5	SOT-143	26fm	-	5c	Pan
DU	-	MAX6314US48D3-T	Vdet-IC	4.8V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
DU	-	R3112Q381C	Vdet-IC	3.8V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
DU	-	XC6109C35AN	Vdet-IC	3.5V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
DU	-	XC6119C35ANR	Vdet-IC	3.5V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
DU	-	XC6127C45JNR	Vdet-IC	4.5V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DU	-	XC6127N46DNR	Vdet-IC	4.6V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DU	-	XC6501B19ANR-G	LVR-IC	LDO, 1.95V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DV	-	MAX6314US47D3-T	Vdet-IC	4.7V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
DV	-	R3112Q391C	Vdet-IC	3.9V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
DV	-	XC6109C36AN	Vdet-IC	3.6V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
DV	-	XC6119C36ANR	Vdet-IC	3.6V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
DV	-	XC6127C47JNR	Vdet-IC	4.7V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DV	-	XC6127N48DNR	Vdet-IC	4.8V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DV	-	XC6501B201NR-G	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DW	-	MAX6314US46D3-T	Vdet-IC	4.63V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
DX	-	MAX6314US45D3-T	Vdet-IC	4.5V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
DX	-	XC6109C37AN	Vdet-IC	3.7V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
DX	-	XC6119C37ANR	Vdet-IC	3.7V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
DX	-	XC6127C49JNR	Vdet-IC	4.9V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DX	-	XC6127N50DNR	Vdet-IC	5.0V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DX	-	XC6501B20ANR-G	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DX-	-	BB404M	MMIC	DG BBFET, 5..9V, 29dB(200MHz)	MPAK-4R	24fd	A3	5b	Hit
DY	-	MAX6314US44D3-T	Vdet-IC	4.39V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
DY	-	XC6109C38AN	Vdet-IC	3.8V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
DY	-	XC6119C38ANR	Vdet-IC	3.8V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
DY	-	XC6127C51JNR	Vdet-IC	5.1V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DY	-	XC6127N52DNR	Vdet-IC	5.2V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DY	-	XC6501B211NR-G	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
DZ	-	MAX6314US43D3-T	Vdet-IC	4.3V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
DZ	-	XC6109C39AN	Vdet-IC	3.9V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
DZ	-	XC6119C39ANR	Vdet-IC	3.9V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
DZ	-	XC6127C53JNR	Vdet-IC	5.3V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
DZ	-	XC6127N54DNR	Vdet-IC	5.4V±0.8%, -Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
DZ	-	XC6501B21ANR-G	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
E	gc	ELM7526NCB	Vdet-IC	2.6V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
E	gd	ELM7526CCB	Vdet-IC	2.6V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
E0	-	AP8821C-40GI	Vdet-IC	4.0V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
E0	-	AP8821C-40GS	Vdet-IC	4.0V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
E0	-	AP8821C-40PI	Vdet-IC	4.0V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
E0	-	AP8821C-40PS	Vdet-IC	4.0V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
E0	-	R1180Q201C	LVR-IC	LDO, 2.0V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
E0	-	R3114Q471A	Vdet-IC	4.7V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
E0	-	XC6127C55KNR	Vdet-IC	5.5V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
E0	-	XC61CC4002N	Vdet-IC	4.0V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
E0	-	XC6221A31BNR	LVR-IC	LDO, 3.15V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
e05	-	LN3526C4012M	Vdet-IC	4.0V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
e06	-	LN3526C4042M	Vdet-IC	4.0V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
e07	-	LN3526C4052M	Vdet-IC	4.0V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
E1	-	AP8821C-41GI	Vdet-IC	4.1V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E1	-	AP8821C-41GS	Vdet-IC	4.1V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
E1	-	AP8821C-41PI	Vdet-IC	4.1V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
E1	-	AP8821C-41PS	Vdet-IC	4.1V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
E1	-	R1180Q211C	LVR-IC	LDO, 2.1V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
E1	-	R3114Q481A	Vdet-IC	4.8V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
E1	-	XC61CC4102N	Vdet-IC	4.1V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
E1	-	XC6221A32BNR	LVR-IC	LDO, 3.25V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
E1	-	XC6233H21BNR-G	LVR-IC	LVO, 2.15V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
e15	-	LN3526C4112M	Vdet-IC	4.1V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
e16	-	LN3526C4142M	Vdet-IC	4.1V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
e17	-	LN3526C4152M	Vdet-IC	4.1V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
E2	-	AP8821C-42GI	Vdet-IC	4.2V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
E2	-	AP8821C-42GS	Vdet-IC	4.2V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
E2	-	AP8821C-42PI	Vdet-IC	4.2V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
E2	-	AP8821C-42PS	Vdet-IC	4.2V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
E2	-	R1180Q221C	LVR-IC	LDO, 2.2V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
E2	-	R3114Q491A	Vdet-IC	4.9V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
E2	-	XC61CC4202N	Vdet-IC	4.2V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
E2	-	XC6221A33BNR	LVR-IC	LDO, 3.35V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
E2	-	XC6223D121NR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
E2	-	XC6233H22BNR-G	LVR-IC	LVO, 2.25V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
e25	-	LN3526C4212M	Vdet-IC	4.2V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
e26	-	LN3526C4242M	Vdet-IC	4.2V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
e27	-	LN3526C4252M	Vdet-IC	4.2V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
E3	-	AP8821C-43GI	Vdet-IC	4.3V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
E3	-	AP8821C-43GS	Vdet-IC	4.3V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
E3	-	AP8821C-43PI	Vdet-IC	4.3V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
E3	-	AP8821C-43PS	Vdet-IC	4.3V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
E3	-	R1180Q231C	LVR-IC	LDO, 2.3V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
E3	-	R3114Q501A	Vdet-IC	5V±0.8%, -Reset ODO	SC-82AB	26vdl	VD9	5m	Ric
E3	-	XC61CC4302N	Vdet-IC	4.3V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
E3	-	XC6221A34BNR	LVR-IC	LDO, 3.45V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
E3	-	XC6223D131NR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
E3	-	XC6233H23BNR-G	LVR-IC	LVO, 2.35V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
e35	-	LN3526C4312M	Vdet-IC	4.3V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
e36	-	LN3526C4342M	Vdet-IC	4.3V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
e37	-	LN3526C4352M	Vdet-IC	4.3V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
E4	-	AP8821C-44GI	Vdet-IC	4.4V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
E4	-	AP8821C-44GS	Vdet-IC	4.4V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
E4	-	AP8821C-44PI	Vdet-IC	4.4V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
E4	-	AP8821C-44PS	Vdet-IC	4.4V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
E4	-	R1180Q241C	LVR-IC	LDO, 2.4V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
E4	-	XC61CC4402N	Vdet-IC	4.4V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
E4	-	XC6221A35BNR	LVR-IC	LDO, 3.55V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
E4	-	XC6223D141NR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
E4	-	XC6233H24BNR-G	LVR-IC	LVO, 2.45V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
e45	-	LN3526C4412M	Vdet-IC	4.4V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
e46	-	LN3526C4442M	Vdet-IC	4.4V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
e47	-	LN3526C4452M	Vdet-IC	4.4V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
E5	-	AP8821C-45GI	Vdet-IC	4.5V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
E5	-	AP8821C-45GS	Vdet-IC	4.5V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
E5	-	AP8821C-45PI	Vdet-IC	4.5V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
E5	-	AP8821C-45PS	Vdet-IC	4.5V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
E5	-	R1140Q151D	LVR-IC	LDO, 1.5V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
E5	-	R1180Q251C	LVR-IC	LDO, 2.5V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
E5	-	XC61CC4502N	Vdet-IC	4.5V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
E5	-	XC6221A36BNR	LVR-IC	LDO, 3.65V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
E5	-	XC6223D151NR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
E5	-	XC6233H25BNR-G	LVR-IC	LVO, 2.55V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
e55	-	LN3526C4512M	Vdet-IC	4.5V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
e56	-	LN3526C4542M	Vdet-IC	4.5V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
e57	-	LN3526C4552M	Vdet-IC	4.5V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
E6	-	AP8821C-46GI	Vdet-IC	4.6V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
E6	-	AP8821C-46GS	Vdet-IC	4.6V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
E6	-	AP8821C-46PI	Vdet-IC	4.6V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
E6	-	AP8821C-46PS	Vdet-IC	4.6V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
E6	-	BFG17A	Si-npn	VHF/UHF-Amp, 25V, 50mA, 300mW, B>20..150, 2.8GHz	SOT-143	24t6	-	5c	Phi
E6	-	R1140Q161D	LVR-IC	LDO, 1.6V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
E6	-	R1180Q261C	LVR-IC	LDO, 2.6V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
E6	-	XC61CC4602N	Vdet-IC	4.6V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E6	-	XC6221A37BNR	LVR-IC	LDO, 3.75V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
E6	-	XC6223D161NR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
E6	-	XC6233H26BNR-G	LVR-IC	LVO, 2.65V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
e65	-	LN3526C4612M	Vdet-IC	4.6V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
e66	-	LN3526C4642M	Vdet-IC	4.6V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
e67	-	LN3526C4652M	Vdet-IC	4.6V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
E7	-	AP8821C-47GI	Vdet-IC	4.7V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
E7	-	AP8821C-47GS	Vdet-IC	4.7V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
E7	-	AP8821C-47PI	Vdet-IC	4.7V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
E7	-	AP8821C-47PS	Vdet-IC	4.7V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
E7	-	R1140Q171D	LVR-IC	LDO, 1.7V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
E7	-	R1180Q271C	LVR-IC	LDO, 2.7V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
E7	-	XC61CC4702N	Vdet-IC	4.7V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
E7	-	XC6221A38BNR	LVR-IC	LDO, 3.85V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
E7	-	XC6223D171NR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
E7	-	XC6233H27BNR-G	LVR-IC	LVO, 2.75V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
e75	-	LN3526C4712M	Vdet-IC	4.7V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
e76	-	LN3526C4742M	Vdet-IC	4.7V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
e77	-	LN3526C4752M	Vdet-IC	4.7V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
E8	-	AP8821C-48GI	Vdet-IC	4.8V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
E8	-	AP8821C-48GS	Vdet-IC	4.8V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
E8	-	AP8821C-48PI	Vdet-IC	4.8V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
E8	-	AP8821C-48PS	Vdet-IC	4.8V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
E8	-	R1140Q181D	LVR-IC	LDO, 1.8V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
E8	-	R1180Q281C	LVR-IC	LDO, 2.8V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
E8	-	XC61CC4802N	Vdet-IC	4.8V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
E8	-	XC6221A39BNR	LVR-IC	LDO, 3.95V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5a	Tor
E8	-	XC6223D181NR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
E8	-	XC6233H28BNR-G	LVR-IC	LVO, 2.85V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
e85	-	LN3526C4812M	Vdet-IC	4.8V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
e86	-	LN3526C4842M	Vdet-IC	4.8V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
e87	-	LN3526C4852M	Vdet-IC	4.8V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
E9	-	AP8821C-49GI	Vdet-IC	4.9V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
E9	-	AP8821C-49GS	Vdet-IC	4.9V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
E9	-	AP8821C-49PI	Vdet-IC	4.9V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
E9	-	AP8821C-49PS	Vdet-IC	4.9V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
E9	-	R1140Q191D	LVR-IC	LDO, 1.9V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
E9	-	R1180Q291C	LVR-IC	LDO, 2.9V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
E9	-	XC61CC4902N	Vdet-IC	4.9V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
E9	-	XC6223D191NR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
E9	-	XC6233H29BNR-G	LVR-IC	LVO, 2.95V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
e95	-	LN3526C4912M	Vdet-IC	4.9V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
e96	-	LN3526C4942M	Vdet-IC	4.9V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
e97	-	LN3526C4952M	Vdet-IC	4.9V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
E99	-	START499ETR	Si-npn	RF, UHF-VHF, 15V, 600mA, 600mW, B=160, 42GHz	SOT-343	26te	-	5c	Ste
EA	-	MAX6314US42D3-T	Vdet-IC	4.2V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
EA	-	R3112Q401A	Vdet-IC	4V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
EA	-	RP130Q501A	LVR-IC	LDO, LN, -CE, 5V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
EA	-	XC6127C15KNR	Vdet-IC	1.5V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
EA	-	XC6127N16ENR	Vdet-IC	1.6V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
EA	-	XC6223D201NR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
EA	-	XC6501B221NR-G	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
EB	-	MAX6314US41D3-T	Vdet-IC	4.1V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
EB	-	R3112Q411A	Vdet-IC	4.1V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
EB	-	XC6127C17KNR	Vdet-IC	1.7V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
EB	-	XC6127N18ENR	Vdet-IC	1.8V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
EB	-	XC6223D211NR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
EB	-	XC6501B22ANR-G	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
EC	-	3SK247	n-MOSFET	Dual gate, VHF, 15V, Idss=0..10mA	SOT-143	26fm	-	5c	Pan
EC	-	MAX6314US40D3-T	Vdet-IC	4.0V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
EC	-	R3112Q421A	Vdet-IC	4.2V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
EC	-	XC6127C19KNR	Vdet-IC	1.9V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
EC	-	XC6127N20ENR	Vdet-IC	2.0V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
EC	-	XC6223D221NR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
EC	-	XC6501B231NR-G	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
ED	-	R3112Q431A	Vdet-IC	4.3V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
ED	-	XC6127C21KNR	Vdet-IC	2.1V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
ED	-	XC6127N22ENR	Vdet-IC	2.2V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
ED	-	XC6223D231NR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ED	-	XC6501B23ANR-G	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EE	-	R3112Q441A	Vdet-IC	4.4V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
EE	-	XC6127C23KNR	Vdet-IC	2.3V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
EE	-	XC6127N24ENR	Vdet-IC	2.4V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
EE	-	XC6223D241NR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
EE	-	XC6501B241NR-G	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
EF	-	R1141Q151D	LVR-IC	LDO, 1.5V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
EF	-	R3112Q451A	Vdet-IC	4.5V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
EF	-	XC6127C25KNR	Vdet-IC	2.5V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
EF	-	XC6127N26ENR	Vdet-IC	2.6V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
EF	-	XC6223D251NR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
EF	-	XC6501B24ANR-G	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
EG	-	MAX6314US39D3-T	Vdet-IC	3.9V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
EG	-	R1141Q161D	LVR-IC	LDO, 1.6V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
EG	-	R3112Q461A	Vdet-IC	4.6V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
EH	-	MAX6314US38D3-T	Vdet-IC	3.8V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
EH	-	R1141Q171D	LVR-IC	LDO, 1.7V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
EH	-	R3112Q471A	Vdet-IC	4.7V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
EH	-	XC6127C27KNR	Vdet-IC	2.7V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
EH	-	XC6127N28ENR	Vdet-IC	2.8V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
EH	-	XC6223D261NR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
EH	-	XC6501B251NR-G	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
EI	-	MAX6314US37D3-T	Vdet-IC	3.7V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
EJ	-	MAX6314US36D3-T	Vdet-IC	3.6V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
EJ	-	R1141Q181D	LVR-IC	LDO, 1.8V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
EJ	-	R3112Q481A	Vdet-IC	4.8V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
EJ4	-	3SK181-4	n-FET	Dual gate, FM/VHF, 15V, 30mA, 200mW, Idss=2.5..6mA	SOT-143	26fm	-	5b	San
EJ5	-	3SK181-5	n-FET	Dual gate, FM/VHF, 15V, 30mA, 200mW, Idss=5..12mA	SOT-143	26fm	-	5b	San
EJ6	-	3SK181-6	n-FET	Dual gate, FM/VHF, 15V, 30mA, 200mW, Idss=10..24mA	SOT-143	26fm	-	5b	San
EK	-	MAX6314US35D3-T	Vdet-IC	3.5V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
EK	-	R1141Q191D	LVR-IC	LDO, 1.9V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
EK	-	R3112Q491A	Vdet-IC	4.9V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
EK	-	XC6127C29KNR	Vdet-IC	2.9V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
EK	-	XC6127N30ENR	Vdet-IC	3.0V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
EK	-	XC6223D271NR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
EK	-	XC6501B25ANR-G	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
EL	-	MAX6314US34D3-T	Vdet-IC	3.4V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
EL	-	R3112Q401C	Vdet-IC	4V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
EL	-	XC6127C31KNR	Vdet-IC	3.1V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
EL	-	XC6127N32ENR	Vdet-IC	3.2V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
EL	-	XC6223D281NR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
EL	-	XC6501B261NR-G	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
EM	-	MAX6314US33D3-T	Vdet-IC	3.3V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
EM	-	R3112Q411C	Vdet-IC	4.1V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
EM	-	XC6127C33KNR	Vdet-IC	3.3V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
EM	-	XC6127N34ENR	Vdet-IC	3.4V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
EM	-	XC6223D291NR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
EM	-	XC6501B26ANR-G	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
EN	-	MAX6314US32D3-T	Vdet-IC	3.2V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
EN	-	R3112Q421C	Vdet-IC	4.2V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
EN	-	XC6109C40AN	Vdet-IC	4.0V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
EN	-	XC6119C40ANR	Vdet-IC	4.0V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
EN	-	XC6127C35KNR	Vdet-IC	3.5V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
EN	-	XC6127N36ENR	Vdet-IC	3.6V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
EN	-	XC6501B271NR-G	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
EN3	-	2SC4862-3	Si-npn	UHF, Osc, 20V, 30mA, 20mW, B=60..120, 6.5GHz	SOT-143	26tu	-	5b	San
EN4	-	2SC4862-4	Si-npn	UHF, Osc, 20V, 30mA, 20mW, B=90..180, 6.5GHz	SOT-143	26tu	-	5b	San
EN5	-	2SC4862-5	Si-npn	UHF, Osc, 20V, 30mA, 20mW, B=60..120, 6.5GHz	SOT-143	26tu	-	5b	San
EO	-	2SC5097-O	Si-npn	VHF/UHF, LN, 20V, 15mA, 150mW, 10GHz, B=80..160	SMQ	26tu	-	5b	Tos
EO	-	MAX6314US31D3-T	Vdet-IC	3.08V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
EP	-	MAX6314US30D3-T	Vdet-IC	3.0V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
EP	-	R3112Q431C	Vdet-IC	4.3V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
EP	-	XC6109C41AN	Vdet-IC	4.1V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
EP	-	XC6119C41ANR	Vdet-IC	4.1V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
EP	-	XC6127C37KNR	Vdet-IC	3.7V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
EP	-	XC6127N38ENR	Vdet-IC	3.8V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
EP	-	XC6501B27ANR-G	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
EQ	-	AAT3526ICX-3.08-200	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5i	Ant
EQ	-	R3112Q441C	Vdet-IC	4.4V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
ER	-	2SC5097-R	Si-npn	VHF/UHF, LN, 20V, 15mA, 150mW, 10GHz, B=50..100	SMQ	26tu	-	5b	Tos
ER	-	R3112Q451C	Vdet-IC	4.5V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ER	-	XC6109C42AN	Vdet-IC	4.2V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
ER	-	XC6119C42ANR	Vdet-IC	4.2V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
ER	-	XC6127C39KNR	Vdet-IC	3.9V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
ER	-	XC6127N40ENR	Vdet-IC	4.0V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
ER	-	XC6501B281NR-G	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
ES	-	MAX6314US29D3-T	Vdet-IC	2.93V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
ES	-	R3112Q461C	Vdet-IC	4.6V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
ES	-	XC6109C43AN	Vdet-IC	4.3V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
ES	-	XC6119C43ANR	Vdet-IC	4.3V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
ES	-	XC6127C41KNR	Vdet-IC	4.1V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
ES	-	XC6127N42ENR	Vdet-IC	4.2V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
ES	-	XC6501B28ANR-G	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
ET	-	MAX6314US28D3-T	Vdet-IC	2.8V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
ET	-	R3112Q471C	Vdet-IC	4.7V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
ET	-	XC6109C44AN	Vdet-IC	4.4V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
ET	-	XC6119C44ANR	Vdet-IC	4.4V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
ET	-	XC6127C43KNR	Vdet-IC	4.3V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
ET	-	XC6127N44ENR	Vdet-IC	4.4V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
ET	-	XC6501B291NR-G	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
ETP	-	3SK273-P	n-MESFET	GaAs, Dual gate, VHF/UHF, 13V, 50mA, 200mW, Idss=8.5..17mA	SOT-143	26fm	-	5b	Pan
ETQ	-	3SK273-Q	n-MESFET	GaAs, Dual gate, VHF/UHF, 13V, 50mA, 200mW, Idss=15..21mA	SOT-143	26fm	-	5b	Pan
ETR	-	3SK273-R	n-MESFET	GaAs, Dual gate, VHF/UHF, 13V, 50mA, 200mW, Idss=19..30mA	SOT-143	26fm	-	5b	Pan
ETS	-	3SK273-S	n-MESFET	GaAs, Dual gate, VHF/UHF, 13V, 50mA, 200mW, Idss=25..35mA	SOT-143	26fm	-	5b	Pan
EU	-	MAX6314US27D3-T	Vdet-IC	2.7V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
EU	-	R3112Q481C	Vdet-IC	4.8V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
EU	-	XC6109C45AN	Vdet-IC	4.5V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
EU	-	XC6119C45ANR	Vdet-IC	4.5V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
EU	-	XC6127C45KNR	Vdet-IC	4.5V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
EU	-	XC6127N46ENR	Vdet-IC	4.6V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
EU	-	XC6501B29ANR-G	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
EV	-	MAX6314US26D3-T	Vdet-IC	2.63V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
EV	-	R3112Q491C	Vdet-IC	4.9V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
EV	-	XC6109C46AN	Vdet-IC	4.6V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
EV	-	XC6119C46ANR	Vdet-IC	4.6V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
EV	-	XC6127C47KNR	Vdet-IC	4.7V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
EV	-	XC6127N48ENR	Vdet-IC	4.8V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
EV	-	XC6501B301NR-G	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
EW	-	MAX6314US25D3-T	Vdet-IC	2.5V±1.8%, -MR, -Reset Bidir, PPO, 140ms	SOT-143	24vdh	VD5	5c	Max
EX	-	MAX6314US50D4-T	Vdet-IC	5.0V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
EX	-	XC6109C47AN	Vdet-IC	4.7V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
EX	-	XC6119C47ANR	Vdet-IC	4.7V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
EX	-	XC6127C49KNR	Vdet-IC	4.9V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
EX	-	XC6127N50ENR	Vdet-IC	5.0V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
EX	-	XC6501B30ANR-G	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
EY	-	MAX6314US49D4-T	Vdet-IC	4.9V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
EY	-	XC6109C48AN	Vdet-IC	4.8V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
EY	-	XC6119C48ANR	Vdet-IC	4.8V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
EY	-	XC6127C51KNR	Vdet-IC	5.1V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
EY	-	XC6127N52ENR	Vdet-IC	5.2V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
EY	-	XC6501B311NR-G	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
EZ	-	MAX6314US48D4-T	Vdet-IC	4.8V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
EZ	-	XC6109C49AN	Vdet-IC	4.9V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
EZ	-	XC6119C49ANR	Vdet-IC	4.9V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
EZ	-	XC6127C53KNR	Vdet-IC	5.3V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
EZ	-	XC6127N54ENR	Vdet-IC	5.4V±0.8%, -Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
EZ	-	XC6501B31ANR-G	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
F	gc	ELM7527NCB	Vdet-IC	2.7V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
F	gd	ELM7527CCB	Vdet-IC	2.7V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
F0	-	AP8821C-50GI	Vdet-IC	5.0V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
F0	-	AP8821C-50GS	Vdet-IC	5.0V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
F0	-	AP8821C-50PI	Vdet-IC	5.0V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
F0	-	AP8821C-50PS	Vdet-IC	5.0V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
F0	-	R1140Q201D	LVR-IC	LDO, 2.0V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
F0	-	R1180Q301C	LVR-IC	LDO, 3.0V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
F0	-	R3114Q071C	Vdet-IC	0.7V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
F0	-	XC61CC5002N	Vdet-IC	5.0V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
F0	-	XC6221B311NR	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
F0	-	XC6224A08BNR	LVR-IC	LDO, 0.85V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
f05	-	LN3526C5012M	Vdet-IC	5.0V±2%, -Reset PPO, -MR, 200ms	SOT-143	24vdh	VD5	5c	Nln
F05	-	TSDF1205	Si-npn	UHF-VHF, LN, 9V, 12mA, 40mW, B=50..250, 12GHz	SOT-143	24tc	-	5b	Vs



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
f06	-	LN3526C5042M	Vdet-IC	5.0V±2%, -Reset PPO, -MR, 400ms	SOT-143	24vdh	VD5	5c	Nln
f07	-	LN3526C5052M	Vdet-IC	5.0V±2%, -Reset PPO, -MR, 50ms	SOT-143	24vdh	VD5	5c	Nln
F1	-	AP8821C-51GI	Vdet-IC	5.1V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
F1	-	AP8821C-51GS	Vdet-IC	5.1V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
F1	-	AP8821C-51PI	Vdet-IC	5.1V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
F1	-	AP8821C-51PS	Vdet-IC	5.1V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
F1	-	R1140Q211D	LVR-IC	LDO, 2.1V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
F1	-	R1180Q311C	LVR-IC	LDO, 3.1V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
F1	-	R3114Q081C	Vdet-IC	0.8V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
F1	-	XC61CC5102N	Vdet-IC	5.1V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
F1	-	XC6221B321NR	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
F1	-	XC6224A09BNR	LVR-IC	LDO, 0.95V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
F1	-	XC6233H30BNR-G	LVR-IC	LVO, 3.05V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
F2	-	AP8821C-52GI	Vdet-IC	5.2V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
F2	-	AP8821C-52GS	Vdet-IC	5.2V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
F2	-	AP8821C-52PI	Vdet-IC	5.2V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
F2	-	AP8821C-52PS	Vdet-IC	5.2V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
F2	-	R1140Q221D	LVR-IC	LDO, 2.2V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
F2	-	R1180Q321C	LVR-IC	LDO, 3.2V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
F2	-	R3114Q091C	Vdet-IC	0.9V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
F2	-	XC61CC5202N	Vdet-IC	5.2V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
F2	-	XC6221B331NR	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
F2	-	XC6224A10BNR	LVR-IC	LDO, 1.05V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
F2	-	XC6233H31BNR-G	LVR-IC	LVO, 3.15V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
F20	-	TSDF1220	Si-npn	UHF-VHF, LN, 9V, 40mA, 200mW, B=50..150, 12GHz	SOT-143	24tc	-	5b	Vs
F3	-	AP8821C-53GI	Vdet-IC	5.3V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
F3	-	AP8821C-53GS	Vdet-IC	5.3V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
F3	-	AP8821C-53PI	Vdet-IC	5.3V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
F3	-	AP8821C-53PS	Vdet-IC	5.3V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
F3	-	R1140Q231D	LVR-IC	LDO, 2.3V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
F3	-	R1180Q331C	LVR-IC	LDO, 3.3V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
F3	-	R3114Q101C	Vdet-IC	1V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
F3	-	SPF-3043	p-FET	GaAs, UHF, LN, 7V, 60mA, 420mW, 10GHz, 22dB(2GHz)	SOT-143	26fq	-	5b	Sir
F3	-	XC61CC5302N	Vdet-IC	5.3V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
F3	-	XC6221B341NR	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
F3	-	XC6224A11BNR	LVR-IC	LDO, 1.15V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
F3	-	XC6233H32BNR-G	LVR-IC	LVO, 3.25V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
F31Z	-	SPF-3143Z	p-FET	GaAs, UHF, LN, 7V, 180mA, 325mW, 3.5GHz, 21dB(2GHz)	SOT-143	26fq	-	5b	Sir
F4	-	AP8821C-54GI	Vdet-IC	5.4V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
F4	-	AP8821C-54GS	Vdet-IC	5.4V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
F4	-	AP8821C-54PI	Vdet-IC	5.4V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
F4	-	AP8821C-54PS	Vdet-IC	5.4V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
F4	-	R1140Q241D	LVR-IC	LDO, 2.4V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
F4	-	R1180Q341C	LVR-IC	LDO, 3.4V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
F4	-	R3114Q111C	Vdet-IC	1.1V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
F4	-	XC61CC5402N	Vdet-IC	5.4V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
F4	-	XC6221B351NR	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
F4	-	XC6224A12BNR	LVR-IC	LDO, 1.25V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
F4	-	XC6233H33BNR-G	LVR-IC	LVO, 3.35V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
F5	-	AP8821C-55GI	Vdet-IC	5.5V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
F5	-	AP8821C-55GS	Vdet-IC	5.5V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
F5	-	AP8821C-55PI	Vdet-IC	5.5V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
F5	-	AP8821C-55PS	Vdet-IC	5.5V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
F5	-	R1140Q251D	LVR-IC	LDO, 2.5V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
F5	-	R1180Q351C	LVR-IC	LDO, 3.5V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
F5	-	R3114Q121C	Vdet-IC	1.2V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
F5	-	XC61CC5502N	Vdet-IC	5.5V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
F5	-	XC6221B361NR	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
F5	-	XC6224A13BNR	LVR-IC	LDO, 1.25V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
F5	-	XC6233H34BNR-G	LVR-IC	LVO, 3.45V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
F6	-	AP8821C-56GI	Vdet-IC	5.6V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
F6	-	AP8821C-56GS	Vdet-IC	5.6V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
F6	-	AP8821C-56PI	Vdet-IC	5.6V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
F6	-	AP8821C-56PS	Vdet-IC	5.6V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
F6	-	R1140Q261D	LVR-IC	LDO, 2.6V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
F6	-	R1180Q361C	LVR-IC	LDO, 3.6V±2%, 150mA	SC-82AB	26yr	VR1	5m	Ric
F6	-	R3114Q131C	Vdet-IC	1.3V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
F6	-	XC61CC5602N	Vdet-IC	5.6V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
F6	-	XC6221B371NR	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
F6	-	XC6224A14BNR	LVR-IC	LDO, 1.45V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F6	-	XC6233H35BNR-G	LVR-IC	LVO, 3.55V±1%, 200mA, +CE	SSOT-24	26vn	VR4	5j	Tor
F7	-	AP8821C-57GI	Vdet-IC	5.7V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
F7	-	AP8821C-57GS	Vdet-IC	5.7V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
F7	-	AP8821C-57PI	Vdet-IC	5.7V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
F7	-	AP8821C-57PS	Vdet-IC	5.7V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
F7	-	R1140Q271D	LVR-IC	LDO, 2.7V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
F7	-	R3114Q141C	Vdet-IC	1.4V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
F7	-	XC61CC5702N	Vdet-IC	5.7V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
F7	-	XC6221B381NR	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
F7	-	XC6224A15BNR	LVR-IC	LDO, 1.55V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
F8	-	AP8821C-58GI	Vdet-IC	5.8V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
F8	-	AP8821C-58GS	Vdet-IC	5.8V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
F8	-	AP8821C-58PI	Vdet-IC	5.8V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
F8	-	AP8821C-58PS	Vdet-IC	5.8V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
F8	-	R1140Q281D	LVR-IC	LDO, 2.8V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
F8	-	R3114Q151C	Vdet-IC	1.5V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
F8	-	XC61CC5802N	Vdet-IC	5.8V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
F8	-	XC6221B391NR	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
F8	-	XC6224A16BNR	LVR-IC	LDO, 1.65V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
F9	-	AP8821C-59GI	Vdet-IC	5.9V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
F9	-	AP8821C-59GS	Vdet-IC	5.9V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
F9	-	AP8821C-59PI	Vdet-IC	5.9V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
F9	-	AP8821C-59PS	Vdet-IC	5.9V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
F9	-	R1140Q291D	LVR-IC	LDO, 2.9V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
F9	-	R3114Q161C	Vdet-IC	1.6V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
F9	-	XC61CC5902N	Vdet-IC	5.9V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
F9	-	XC6221B401NR	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
F9	-	XC6224A17BNR	LVR-IC	LDO, 1.75V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
FA	-	BFP81	Si-npn	VHF/UHF, 25V, 30mA, 200mW, B=50..200, >5.8GHz	SOT-143	24tc	-	5b	Vs
FA	-	MAX6314US47D4-T	Vdet-IC	4.7V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FA	-	R1141Q201D	LVR-IC	LDO, 2.0V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
FA	-	RP130Q121B	LVR-IC	LDO, LN, +CE, 1.2V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
FA	-	XC6127C16ANR	Vdet-IC	1.6V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FA	-	XC6127N16FNR	Vdet-IC	1.6V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FA	-	XC6224A18BNR	LVR-IC	LDO, 1.85V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
FA	-	XC6501B321NR-G	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FAs	-	BFP81	Si-npn	VHF/UHF, 25V, 30mA, 280mW, B=50..200, >5.8GHz	SOT-143	24tc	-	5b	Sie
FB	-	MAX6314US46D4-T	Vdet-IC	4.63V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FB	-	R1141Q211D	LVR-IC	LDO, 2.1V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
FB	-	RP130Q131B	LVR-IC	LDO, LN, +CE, 1.3V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
FB	-	XC6127C18ANR	Vdet-IC	1.8V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FB	-	XC6127N18FNR	Vdet-IC	1.8V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FB	-	XC6224A19BNR	LVR-IC	LDO, 1.95V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
FB	-	XC6501B32ANR-G	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FC	-	MAX6314US45D4-T	Vdet-IC	4.5V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FC	-	R1141Q221D	LVR-IC	LDO, 2.2V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
FC	-	RP130Q141B	LVR-IC	LDO, LN, +CE, 1.4V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
FC	-	XC6127C20ANR	Vdet-IC	2.0V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FC	-	XC6127N20FNR	Vdet-IC	2.0V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FC	-	XC6224A251NR	LVR-IC	LDO, 2.5V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
FC	-	XC6501B331NR-G	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FD	-	MAX6314US44D4-T	Vdet-IC	4.39V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FD	-	R1141Q231D	LVR-IC	LDO, 2.3V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
FD	-	RP130Q151B	LVR-IC	LDO, LN, +CE, 1.5V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
FD	-	XC6127C22ANR	Vdet-IC	2.2V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FD	-	XC6127N22FNR	Vdet-IC	2.2V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FD	-	XC6223E301NR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
FD	-	XC6501B33ANR-G	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FE	-	BFP93A	Si-npn	VHF/UHF, 20V, 50mA, 200mW, B=50..200, >6GHz	SOT-143	24tc	-	5b	Vs
FE	-	MAX6314US43D4-T	Vdet-IC	4.3V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FE	-	R1141Q241D	LVR-IC	LDO, 2.4V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
FE	-	RP130Q161B	LVR-IC	LDO, LN, +CE, 1.6V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
FE	-	XC6127C24ANR	Vdet-IC	2.4V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FE	-	XC6127N24FNR	Vdet-IC	2.4V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FE	-	XC6223E311NR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
FE	-	XC6501B341NR-G	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FEs	-	BFP93A	Si-npn	VHF/UHF, 20V, 50mA, 300mW, B=50..200, >6GHz	SOT-143	24tc	-	5b	Sie
FF	-	MAX6314US42D4-T	Vdet-IC	4.2V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FF	-	R1141Q251D	LVR-IC	LDO, 2.5V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
FF	-	RP130Q171B	LVR-IC	LDO, LN, +CE, 1.7V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FF	-	XC6127C26ANR	Vdet-IC	2.6V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FF	-	XC6127N26FNR	Vdet-IC	2.6V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FF	-	XC6223E321NR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
FF	-	XC6501B34ANR-G	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FG	-	MAX6314US41D4-T	Vdet-IC	4.1V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FG	-	R1141Q261D	LVR-IC	LDO, 2.6V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
FG	-	RP130Q181B	LVR-IC	LDO, LN, +CE, 1.8V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
FH	-	AAT3527ICX-3.08-200	Vdet-IC	3.08V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5i	Ant
FH	-	MAX6314US40D4-T	Vdet-IC	4.0V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FH	-	R1141Q271D	LVR-IC	LDO, 2.7V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
FH	-	RP130Q181B5	LVR-IC	LDO, LN, +CE, 1.85V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
FH	-	XC6127C28ANR	Vdet-IC	2.8V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FH	-	XC6127N28FNR	Vdet-IC	2.8V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FH	-	XC6223E331NR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
FH	-	XC6501B351NR-G	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FI	-	AAT3528ICX-3.00-200	Vdet-IC	3.0V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5i	Ant
FI	-	MAX6314US39D4-T	Vdet-IC	3.9V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FI-	-	3SK186	n-MOSFET	Dual gate, UHF, 12V, Idss=0..4V	SOT-143	26fm	-	5c	Ren
FJ	-	AAT3528ICX-3.08-200-	Vdet-IC	3.08V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5i	Ant
FJ	-	MAX6314US38D4-T	Vdet-IC	3.8V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FJ	-	R1141Q281D	LVR-IC	LDO, 2.8V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
FJ	-	RP130Q191B	LVR-IC	LDO, LN, +CE, 1.9V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
FK	-	MAX6314US37D4-T	Vdet-IC	3.7V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FK	-	R1141Q291D	LVR-IC	LDO, 2.9V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
FK	-	RP130Q201B	LVR-IC	LDO, LN, +CE, 2V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
FK	-	XC6127C30ANR	Vdet-IC	3.0V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FK	-	XC6127N30FNR	Vdet-IC	3.0V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FK	-	XC6223E341NR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
FK	-	XC6501B35ANR-G	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FL	-	MAX6314US36D4-T	Vdet-IC	3.6V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FL	-	XC6127C32ANR	Vdet-IC	3.2V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FL	-	XC6127N32FNR	Vdet-IC	3.2V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FL	-	XC6223E351NR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
FL	-	XC6501B361NR-G	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FM	-	MAX6314US35D4-T	Vdet-IC	3.5V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FM	-	XC6127C34ANR	Vdet-IC	3.4V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FM	-	XC6127N34FNR	Vdet-IC	3.4V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FM	-	XC6223E361NR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
FM	-	XC6501B36ANR-G	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FN	-	MAX6314US34D4-T	Vdet-IC	3.4V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FN	-	XC6109C50AN	Vdet-IC	5.0V±2%, +Reset PPO	SSOT-24	26rp	VD3	5c	Tor
FN	-	XC6119C50ANR	Vdet-IC	5.0V±2%, -Reset PPO	SSOT-24	26gh	VD3	5a	Tor
FN	-	XC6127C36ANR	Vdet-IC	3.6V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FN	-	XC6127N36FNR	Vdet-IC	3.6V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FN	-	XC6501B371NR-G	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FN3	-	2SC4865-3	Si-npn	VHF/UHF-Amp, 16V, 70mA, 200mW, B=60..120, 7GHz	SOT-143	26tu	-	5b	San
FN4	-	2SC4865-4	Si-npn	VHF/UHF-Amp, 16V, 70mA, 200mW, B=90..180, 7GHz	SOT-143	26tu	-	5b	San
FN5	-	2SC4865-5	Si-npn	VHF/UHF-Amp, 16V, 70mA, 200mW, B=130..270, 7GHz	SOT-143	26tu	-	5b	San
FO	-	MAX6314US33D4-T	Vdet-IC	3.3V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FP	-	MAX6314US32D4-T	Vdet-IC	3.2V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FP	-	XC6127C38ANR	Vdet-IC	3.8V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FP	-	XC6127N38FNR	Vdet-IC	3.8V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FP	-	XC6223E371NR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
FP	-	XC6501B37ANR-G	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FQ	-	AAT3528ICX-2.93-200	Vdet-IC	2.93V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5i	Ant
FQ	-	MAX6314US31D4-T	Vdet-IC	3.08V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FR	-	MAX6314US30D4-T	Vdet-IC	3.0V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FR	-	XC6127C40ANR	Vdet-IC	4.0V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FR	-	XC6127N40FNR	Vdet-IC	4.0V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FR	-	XC6223E381NR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
FR	-	XC6501B381NR-G	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FS	-	MAX6314US29D4-T	Vdet-IC	2.93V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FS	-	XC6127C42ANR	Vdet-IC	4.2V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FS	-	XC6127N42FNR	Vdet-IC	4.2V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FS	-	XC6223E391NR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
FS	-	XC6501B38ANR-G	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FT	-	MAX6314US28D4-T	Vdet-IC	2.8V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FT	-	XC6127C44ANR	Vdet-IC	4.4V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FT	-	XC6127N44FNR	Vdet-IC	4.4V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FT	-	XC6223E401NR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FT	-	XC6501B391NR-G	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FU	-	MAX6314US27D4-T	Vdet-IC	2.7V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FU	-	XC6127C46ANR	Vdet-IC	4.6V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FU	-	XC6127N46FNR	Vdet-IC	4.6V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FU	-	XC6224A261NR	LVR-IC	LDO, 2.6V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
FU	-	XC6501B39ANR-G	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FV	-	MAX6314US26D4-T	Vdet-IC	2.63V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FV	-	XC6127C48ANR	Vdet-IC	4.8V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FV	-	XC6127N48FNR	Vdet-IC	4.8V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FV	-	XC6224A271NR	LVR-IC	LDO, 2.7V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
FV	-	XC6501B401NR-G	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FW	-	MAX6314US25D4-T	Vdet-IC	2.5V±1.8%, -MR, -Reset Bidir, PPO, 1120ms	SOT-143	24vdh	VD5	5c	Max
FX	-	MAX6315US50D1-T	Vdet-IC	5.0V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
FX	-	XC6127C50ANR	Vdet-IC	5.0V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FX	-	XC6127N50FNR	Vdet-IC	5.0V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FX	-	XC6224A281NR	LVR-IC	LDO, 2.8V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
FX	-	XC6501B40ANR-G	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FY	-	MAX6315US49D1-T	Vdet-IC	4.9V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
FY	-	XC6127C52ANR	Vdet-IC	5.2V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FY	-	XC6127N52FNR	Vdet-IC	5.2V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FY	-	XC6224A291NR	LVR-IC	LDO, 2.9V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
FY	-	XC6501B411NR-G	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
FZ	-	MAX6315US48D1-T	Vdet-IC	4.8V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
FZ	-	XC6127C54ANR	Vdet-IC	5.4V±0.8%, -Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
FZ	-	XC6127N54FNR	Vdet-IC	5.4V±0.8%, +Reset ODO, -MR, Rt=50ms	SSOT-24	26cr	VD4	5k	Tor
FZ	-	XC6224A301NR	LVR-IC	LDO, 3.0V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
FZ	-	XC6501B41ANR-G	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
G	gc	ELM7528NCB	Vdet-IC	2.8V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
G	gd	ELM7528CCB	Vdet-IC	2.8V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
G0	-	AP8821C-60GI	Vdet-IC	6.0V±2%, -Reset PPO, Halogen-free	SC-82	26vdl	VD7	5ga	Anw
G0	-	AP8821C-60GS	Vdet-IC	6.0V±2%, -Reset PPO, Halogen-free	SC-82S	90vdl	VD7	5ga	Anw
G0	-	AP8821C-60PI	Vdet-IC	6.0V±2%, -Reset PPO	SC-82	26vdl	VD7	5g	Anw
G0	-	AP8821C-60PS	Vdet-IC	6.0V±2%, -Reset PPO	SC-82S	90vdl	VD7	5g	Anw
G0	-	R1140Q301D	LVR-IC	LDO, 3.0V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
G0	-	R3114Q171C	Vdet-IC	1.7V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
G0	-	RP103Q121B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
G1	-	R1140Q311D	LVR-IC	LDO, 3.1V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
G1	-	R3114Q181C	Vdet-IC	1.8V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
G1	-	RP103Q131B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
G2	-	CGY50	MMIC	GaAs UHF amp. 5.5..7.5V, 0.1...3GHz (30dB)	SOT-143	24aj	A1	5h	Inf
G2	-	R1140Q321D	LVR-IC	LDO, 3.2V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
G2	-	R3114Q191C	Vdet-IC	1.9V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
G2	-	RP103Q151B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
G3	-	FP6801-24CC8P	Vdet-IC	2.4V±2%, -Reset PPO	SC-82	26vdf	VD3	5b	Fit
G3	-	R1140Q331D	LVR-IC	LDO, 3.3V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
G3	-	R3114Q201C	Vdet-IC	2V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
G3	-	RP103Q181B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
G4	-	FP6801-27CC8P	Vdet-IC	2.7V±2%, -Reset PPO	SC-82	26vdf	VD3	5b	Fit
G4	-	R1140Q341D	LVR-IC	LDO, 3.4V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
G4	-	R3114Q211C	Vdet-IC	2.1V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
G4	-	RP103Q181B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
G5	-	FP6801-24NC8P	Vdet-IC	2.4V±2%, -Reset ODO	SC-82	26vdf	VD1	5b	Fit
G5	-	R1140Q351D	LVR-IC	LDO, 3.5V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
G5	-	R3114Q221C	Vdet-IC	2.2V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
G5	-	RP103Q191B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
G6	-	FP6801-27NC8P	Vdet-IC	2.7V±2%, -Reset ODO	SC-82	26vdf	VD1	5b	Fit
G6	-	R1140Q361D	LVR-IC	LDO, 3.6V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
G6	-	R3114Q231C	Vdet-IC	2.3V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
G6	-	RP103Q201B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
G60	-	S-80930CLNB-G60T2	Vdet-IC	3.0V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G60	-	S-80930CLPF-G60T2	Vdet-IC	3.0V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G61	-	S-80931CLNB-G61T2	Vdet-IC	3.1V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G61	-	S-80931CLPF-G61T2	Vdet-IC	3.1V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G62	-	S-80932CLNB-G62T2	Vdet-IC	3.2V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G62	-	S-80932CLPF-G62T2	Vdet-IC	3.2V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G63	-	S-80933CLNB-G63T2	Vdet-IC	3.3V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G63	-	S-80933CLPF-G63T2	Vdet-IC	3.3V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G64	-	S-80934CLNB-G64T2	Vdet-IC	3.4V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G64	-	S-80934CLPF-G64T2	Vdet-IC	3.4V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G65	-	S-80935CLNB-G65T2	Vdet-IC	3.5V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G65	-	S-80935CLPF-G65T2	Vdet-IC	3.5V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G66	-	S-80936CLNB-G66T2	Vdet-IC	3.6V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G66	-	S-80936CLPF-G66T2	Vdet-IC	3.6V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G67	-	S-80937CLNB-G67T2	Vdet-IC	3.7V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G67	-	S-80937CLPF-G67T2	Vdet-IC	3.7V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G68	-	S-80938CLNB-G68T2	Vdet-IC	3.8V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G68	-	S-80938CLPF-G68T2	Vdet-IC	3.8V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G69	-	S-80939CLNB-G69T2	Vdet-IC	3.9V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G69	-	S-80939CLPF-G69T2	Vdet-IC	3.9V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6H	-	S-80913CLNB-G6HT2	Vdet-IC	1.3V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6H	-	S-80913CLPF-G6HT2	Vdet-IC	1.3V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6J	-	S-80914CLNB-G6JT2	Vdet-IC	1.4V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6J	-	S-80914CLPF-G6JT2	Vdet-IC	1.4V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6K	-	S-80915CLNB-G6KT2	Vdet-IC	1.5V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6K	-	S-80915CLPF-G6KT2	Vdet-IC	1.5V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6L	-	S-80916CLNB-G6LT2	Vdet-IC	1.6V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6L	-	S-80916CLPF-G6LT2	Vdet-IC	1.6V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6M	-	S-80917CLNB-G6MT2	Vdet-IC	1.7V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6M	-	S-80917CLPF-G6MT2	Vdet-IC	1.7V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6N	-	S-80918CLNB-G6NT2	Vdet-IC	1.8V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6N	-	S-80918CLPF-G6NT2	Vdet-IC	1.8V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6P	-	S-80919CLNB-G6PT2	Vdet-IC	1.9V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6P	-	S-80919CLPF-G6PT2	Vdet-IC	1.9V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6Q	-	S-80920CLNB-G6QT2	Vdet-IC	2.0V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6Q	-	S-80920CLPF-G6QT2	Vdet-IC	2.0V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6R	-	S-80921CLNB-G6RT2	Vdet-IC	2.1V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6R	-	S-80921CLPF-G6RT2	Vdet-IC	2.1V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6S	-	S-80922CLNB-G6ST2	Vdet-IC	2.2V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6S	-	S-80922CLPF-G6ST2	Vdet-IC	2.2V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6T	-	S-80923CLNB-G6TT2	Vdet-IC	2.3V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6T	-	S-80923CLPF-G6TT2	Vdet-IC	2.3V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6U	-	S-80924CLNB-G6UT2	Vdet-IC	2.4V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6U	-	S-80924CLPF-G6UT2	Vdet-IC	2.4V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6V	-	S-80925CLNB-G6VT2	Vdet-IC	2.5V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6V	-	S-80925CLPF-G6VT2	Vdet-IC	2.5V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6W	-	S-80926CLNB-G6WT2	Vdet-IC	2.6V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6W	-	S-80926CLPF-G6WT2	Vdet-IC	2.6V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6X	-	S-80927CLNB-G6XT2	Vdet-IC	2.7V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6X	-	S-80927CLPF-G6XT2	Vdet-IC	2.7V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6Y	-	S-80928CLNB-G6YT2	Vdet-IC	2.8V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6Y	-	S-80928CLPF-G6YT2	Vdet-IC	2.8V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G6Z	-	S-80929CLNB-G6ZT2	Vdet-IC	2.9V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G6Z	-	S-80929CLPF-G6ZT2	Vdet-IC	2.9V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7	-	R1140Q371D	LVR-IC	LDO, 3.7V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
G7	-	R3114Q241C	Vdet-IC	2.4V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
G7	-	RP103Q251B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
G7A	-	S-80940CLNB-G7AT2	Vdet-IC	4.0V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7A	-	S-80940CLPF-G7AT2	Vdet-IC	4.0V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7B	-	S-80941CLNB-G7BT2	Vdet-IC	4.1V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7B	-	S-80941CLPF-G7BT2	Vdet-IC	4.1V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7C	-	S-80942CLNB-G7CT2	Vdet-IC	4.2V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7C	-	S-80942CLPF-G7CT2	Vdet-IC	4.2V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7D	-	S-80943CLNB-G7DT2	Vdet-IC	4.3V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7D	-	S-80943CLPF-G7DT2	Vdet-IC	4.3V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7E	-	S-80944CLNB-G7ET2	Vdet-IC	4.4V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7E	-	S-80944CLPF-G7ET2	Vdet-IC	4.4V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7F	-	S-80945CLNB-G7FT2	Vdet-IC	4.5V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7F	-	S-80945CLPF-G7FT2	Vdet-IC	4.5V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7G	-	S-80946CLNB-G7GT2	Vdet-IC	4.6V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7G	-	S-80946CLPF-G7GT2	Vdet-IC	4.6V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7H	-	S-80947CLNB-G7HT2	Vdet-IC	4.7V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7H	-	S-80947CLPF-G7HT2	Vdet-IC	4.7V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7J	-	S-80948CLNB-G7JT2	Vdet-IC	4.8V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7J	-	S-80948CLPF-G7JT2	Vdet-IC	4.8V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7K	-	S-80949CLNB-G7KT2	Vdet-IC	4.9V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7K	-	S-80949CLPF-G7KT2	Vdet-IC	4.9V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7L	-	S-80950CLNB-G7LT2	Vdet-IC	5.0V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7L	-	S-80950CLPF-G7LT2	Vdet-IC	5.0V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7M	-	S-80951CLNB-G7MT2	Vdet-IC	5.1V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7M	-	S-80951CLPF-G7MT2	Vdet-IC	5.1V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G7N	-	S-80952CLNB-G7NT2	Vdet-IC	5.2V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7N	-	S-80952CLPF-G7NT2	Vdet-IC	5.2V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7P	-	S-80953CLNB-G7PT2	Vdet-IC	5.3V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7P	-	S-80953CLPF-G7PT2	Vdet-IC	5.3V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7Q	-	S-80954CLNB-G7QT2	Vdet-IC	5.4V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7Q	-	S-80954CLPF-G7QT2	Vdet-IC	5.4V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7R	-	S-80955CLNB-G7RT2	Vdet-IC	5.5V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7R	-	S-80955CLPF-G7RT2	Vdet-IC	5.5V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7S	-	S-80956CLNB-G7ST2	Vdet-IC	5.6V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7S	-	S-80956CLPF-G7ST2	Vdet-IC	5.6V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7T	-	S-80957CLNB-G7TT2	Vdet-IC	5.7V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7T	-	S-80957CLPF-G7TT2	Vdet-IC	5.7V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7U	-	S-80958CLNB-G7UT2	Vdet-IC	5.8V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7U	-	S-80958CLPF-G7UT2	Vdet-IC	5.8V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7V	-	S-80959CLNB-G7VT2	Vdet-IC	5.9V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7V	-	S-80959CLPF-G7VT2	Vdet-IC	5.9V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G7W	-	S-80960CLNB-G7WT2	Vdet-IC	6.0V±2%, -Reset PPO	SC-82AB	26vdf	VD3	5d	Sii
G7W	-	S-80960CLPF-G7WT2	Vdet-IC	6.0V±2%, -Reset ODO	SNT-4A	42hx	VD13	5e	Sii
G8	-	R1140Q381D	LVR-IC	LDO, 3.8V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
G8	-	R3114Q251C	Vdet-IC	2.5V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
G8	-	RP103Q261B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
G80	-	S-80930CNNB-G80T2	Vdet-IC	3.0V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G80	-	S-80930CNPF-G80T2	Vdet-IC	3.0V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G81	-	S-80931CNNB-G81T2	Vdet-IC	3.1V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G81	-	S-80931CNPF-G81T2	Vdet-IC	3.1V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G82	-	S-80932CNNB-G82T2	Vdet-IC	3.2V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G82	-	S-80932CNPF-G82T2	Vdet-IC	3.2V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G83	-	S-80933CNNB-G83T2	Vdet-IC	3.3V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G83	-	S-80933CNPF-G83T2	Vdet-IC	3.3V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G84	-	S-80934CNNB-G84T2	Vdet-IC	3.4V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G84	-	S-80934CNPF-G84T2	Vdet-IC	3.4V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G85	-	S-80935CNNB-G85T2	Vdet-IC	3.5V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G85	-	S-80935CNPF-G85T2	Vdet-IC	3.5V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G86	-	S-80936CNNB-G86T2	Vdet-IC	3.6V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G86	-	S-80936CNPF-G86T2	Vdet-IC	3.6V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G87	-	S-80937CNNB-G87T2	Vdet-IC	3.7V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G87	-	S-80937CNPF-G87T2	Vdet-IC	3.7V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G88	-	S-80938CNNB-G88T2	Vdet-IC	3.8V±2.0%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G88	-	S-80938CNPF-G88T2	Vdet-IC	3.8±V2.0%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G89	-	S-80939CNNB-G89T2	Vdet-IC	3.9V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G89	-	S-80939CNPF-G89T2	Vdet-IC	3.9V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8H	-	S-80913CNNB-G8HT2	Vdet-IC	1.3V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G8H	-	S-80913CNPF-G8HT2	Vdet-IC	1.3V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8J	-	S-80914CNNB-G8JT2	Vdet-IC	1.4V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G8J	-	S-80914CNPF-G8JT2	Vdet-IC	1.4V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8K	-	S-80915CNNB-G8KT2	Vdet-IC	1.5V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G8K	-	S-80915CNPF-G8KT2	Vdet-IC	1.5V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8L	-	S-80916CNNB-G8LT2	Vdet-IC	1.6V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G8L	-	S-80916CNPF-G8LT2	Vdet-IC	1.6V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8M	-	S-80917CNNB-G8MT2	Vdet-IC	1.7V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G8M	-	S-80917CNPF-G8MT2	Vdet-IC	1.7V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8N	-	S-80918CNNB-G8NT2	Vdet-IC	1.8V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G8N	-	S-80918CNPF-G8NT2	Vdet-IC	1.8V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8P	-	S-80919CNNB-G8PT2	Vdet-IC	1.9V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G8P	-	S-80919CNPF-G8PT2	Vdet-IC	1.9V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8Q	-	S-80920CNNB-G8QT2	Vdet-IC	2.0V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G8Q	-	S-80920CNPF-G8QT2	Vdet-IC	2.0V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8R	-	S-80921CNNB-G8RT2	Vdet-IC	2.1V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G8R	-	S-80921CNPF-G8RT2	Vdet-IC	2.1V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8S	-	S-80922CNNB-G8ST2	Vdet-IC	2.2V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G8S	-	S-80922CNPF-G8ST2	Vdet-IC	2.2V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8T	-	S-80923CNNB-G8TT2	Vdet-IC	2.3V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G8T	-	S-80923CNPF-G8TT2	Vdet-IC	2.3V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8U	-	S-80924CNNB-G8UT2	Vdet-IC	2.4V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G8U	-	S-80924CNPF-G8UT2	Vdet-IC	2.4V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8V	-	S-80925CNNB-G8VT2	Vdet-IC	2.5V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G8V	-	S-80925CNPF-G8VT2	Vdet-IC	2.5V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8W	-	S-80926CNNB-G8WT2	Vdet-IC	2.6V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G8W	-	S-80926CNPF-G8WT2	Vdet-IC	2.6V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8X	-	S-80927CNNB-G8XT2	Vdet-IC	2.7V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G8X	-	S-80927CNPF-G8XT2	Vdet-IC	2.7V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8Y	-	S-80928CNNB-G8YT2	Vdet-IC	2.8V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G8Y	-	S-80928CNPF-G8YT2	Vdet-IC	2.8V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G8Z	-	S-80929CNNB-G8ZT2	Vdet-IC	2.9V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G8Z	-	S-80929CNPF-G8ZT2	Vdet-IC	2.9V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9	-	R1140Q391D	LVR-IC	LDO, 3.9V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
G9	-	R3114Q261C	Vdet-IC	2.6V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
G9	-	RP103Q271B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
G9A	-	S-80940CNNB-G9AT2	Vdet-IC	4.0V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9A	-	S-80940CNPF-G9AT2	Vdet-IC	4.0V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9B	-	S-80941CNNB-G9BT2	Vdet-IC	4.1V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9B	-	S-80941CNPF-G9BT2	Vdet-IC	4.1V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9C	-	S-80942CNNB-G9CT2	Vdet-IC	4.2V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9C	-	S-80942CNPF-G9CT2	Vdet-IC	4.2V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9D	-	S-80943CNNB-G9DT2	Vdet-IC	4.3V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9D	-	S-80943CNPF-G9DT2	Vdet-IC	4.3V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9E	-	S-80944CNNB-G9ET2	Vdet-IC	4.4V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9E	-	S-80944CNPF-G9ET2	Vdet-IC	4.4V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9F	-	S-80945CNNB-G9FT2	Vdet-IC	4.5V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9F	-	S-80945CNPF-G9FT2	Vdet-IC	4.5V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9G	-	S-80946CNNB-G9GT2	Vdet-IC	4.6V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9G	-	S-80946CNPF-G9GT2	Vdet-IC	4.6V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9H	-	S-80947CNNB-G9HT2	Vdet-IC	4.7V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9H	-	S-80947CNPF-G9HT2	Vdet-IC	4.7V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9J	-	S-80948CNNB-G9JT2	Vdet-IC	4.8V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9J	-	S-80948CNPF-G9JT2	Vdet-IC	4.8V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9K	-	S-80949CNNB-G9KT2	Vdet-IC	4.9V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9K	-	S-80949CNPF-G9KT2	Vdet-IC	4.9V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9L	-	S-80950CNNB-G9LT2	Vdet-IC	5.0V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9L	-	S-80950CNPF-G9LT2	Vdet-IC	5.0V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9M	-	S-80951CNNB-G9MT2	Vdet-IC	5.1V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9M	-	S-80951CNPF-G9MT2	Vdet-IC	5.1V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9N	-	S-80952CNNB-G9NT2	Vdet-IC	5.2V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9N	-	S-80952CNPF-G9NT2	Vdet-IC	5.2V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9P	-	S-80953CNNB-G9PT2	Vdet-IC	5.3V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9P	-	S-80953CNPF-G9PT2	Vdet-IC	5.3V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9Q	-	S-80954CNNB-G9QT2	Vdet-IC	5.4V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9Q	-	S-80954CNPF-G9QT2	Vdet-IC	5.4V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9R	-	S-80955CNNB-G9RT2	Vdet-IC	5.5V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9R	-	S-80955CNPF-G9RT2	Vdet-IC	5.5V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9S	-	S-80956CNNB-G9ST2	Vdet-IC	5.6V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9S	-	S-80956CNPF-G9ST2	Vdet-IC	5.6V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9T	-	S-80957CNNB-G9TT2	Vdet-IC	5.7V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9T	-	S-80957CNPF-G9TT2	Vdet-IC	5.7V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9U	-	S-80958CNNB-G9UT2	Vdet-IC	5.8V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9U	-	S-80958CNPF-G9UT2	Vdet-IC	5.8V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9V	-	S-80959CNNB-G9VT2	Vdet-IC	5.9V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9V	-	S-80959CNPF-G9VT2	Vdet-IC	5.9V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
G9W	-	S-80960CNNB-G9WT2	Vdet-IC	6.0V±2%, -Reset ODO	SC-82AB	26vdf	VD13	5d	Sii
G9W	-	S-80960CNPF-G9WT2	Vdet-IC	6.0V±2%, -Reset PPO	SNT-4A	42hx	VD3	5e	Sii
GA	-	MAX6315US47D1-T	Vdet-IC	4.7V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
GA	-	R1141Q301D	LVR-IC	LDO, 3.0V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
GA	-	RP130Q211B	LVR-IC	LDO, LN, +CE, 2.1V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
GB	-	MAX6315US46D1-T	Vdet-IC	4.63V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
GB	-	R1141Q311D	LVR-IC	LDO, 3.1V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
GB	-	RP130Q221B	LVR-IC	LDO, LN, +CE, 2.2V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
GC	-	AAT3526ICX-4.38-200	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5i	Ant
GC	-	MAX6315US45D1-T	Vdet-IC	4.5V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
GC	-	R1141Q321D	LVR-IC	LDO, 3.2V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
GC	-	RP130Q231B	LVR-IC	LDO, LN, +CE, 2.3V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
GD	-	FP6801-22NC8P	Vdet-IC	2.2V±2%, -Reset ODO	SC-82	26vdf	VD1	5b	Fit
GD	-	MAX6315US44D1-T	Vdet-IC	4.39V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
GD	-	R1141Q331D	LVR-IC	LDO, 3.3V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
GD	-	RP130Q241B	LVR-IC	LDO, LN, +CE, 2.4V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
GE	-	FP6801-26NC8P	Vdet-IC	2.6V±2%, -Reset ODO	SC-82	26vdf	VD1	5b	Fit
GE	-	MAX6315US43D1-T	Vdet-IC	4.3V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
GE	-	R1141Q341D	LVR-IC	LDO, 3.4V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
GE	-	RP130Q251B	LVR-IC	LDO, LN, +CE, 2.5V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
GF	-	FP6801-29NC8P	Vdet-IC	2.9V±2%, -Reset ODO	SC-82	26vdf	VD1	5b	Fit
GF	-	MAX6315US42D1-T	Vdet-IC	4.2V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GF	-	R1141Q351D	LVR-IC	LDO, 3.5V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
GF	-	RP130Q261B	LVR-IC	LDO, LN, +CE, 2.6V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
GG	-	FP6801-31NC8P	Vdet-IC	3.1V±2%, -Reset ODO	SC-82	26vdf	VD1	5b	Fit
GG	-	MAX6315US41D1-T	Vdet-IC	4.1V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
GG	-	R1141Q361D	LVR-IC	LDO, 3.6V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
GG	-	RP130Q271B	LVR-IC	LDO, LN, +CE, 2.7V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
GH	-	MAX6315US40D1-T	Vdet-IC	4.0V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
GH	-	R1141Q371D	LVR-IC	LDO, 3.7V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
GH	-	RP130Q281B	LVR-IC	LDO, LN, +CE, 2.8V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
Gi	-	FP6801-21CC8P	Vdet-IC	2.1V±2%, -Reset PPO	SC-82	26vdf	VD3	5b	Fit
GI	-	MAX6315US39D1-T	Vdet-IC	3.9V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
GIA	-	2SC3957-A	Si-npn-Darl	AF, 40V, 300mA, 150mW, B=2000..100000	MPAK-4	26tq	-	5b	Ren
GIB	-	2SC3957-B	Si-npn-Darl	AF, 40V, 300mA, 150mW, B=5000..100000	MPAK-4	26tq	-	5b	Ren
GJ	-	MAX6315US38D1-T	Vdet-IC	3.8V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
GJ	-	R1141Q381D	LVR-IC	LDO, 3.8V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
GJ	-	RP130Q281B5	LVR-IC	LDO, LN, +CE, 2.85V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
GK	-	MAX6315US37D1-T	Vdet-IC	3.7V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
GK	-	R1141Q391D	LVR-IC	LDO, 3.9V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
GK	-	RP130Q291B	LVR-IC	LDO, LN, +CE, 2.9V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
GL	-	MAX6315US36D1-T	Vdet-IC	3.6V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
GM	-	MAX6315US35D1-T	Vdet-IC	3.5V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
GN	-	MAX6315US34D1-T	Vdet-IC	3.4V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
GN3	-	2SC4869-3	Si-npn	VHF/UHF-Amp, 16V, 50mA, 200mW, B=60..120, 9GHz	SOT-143	26tu	-	5b	San
GN4	-	2SC4869-4	Si-npn	VHF/UHF-Amp, 16V, 50mA, 200mW, B=90..180, 9GHz	SOT-143	26tu	-	5b	San
GN4	-	2SC5503-4	Si-npn	VHF/UHF, LN, 16V, 50mA, 400mW, B=90..180, 9GHz	SOT-343	26tu	-	5b	San
GN5	-	2SC4869-5	Si-npn	VHF/UHF-Amp, 16V, 50mA, 200mW, B=130..270, 9GHz	SOT-143	26tu	-	5b	San
GN5	-	2SC5503-5	Si-npn	VHF/UHF, LN, 16V, 50mA, 400mW, B=135..270, 9GHz	SOT-343	26tu	-	5b	San
GO	-	MAX6315US33D1-T	Vdet-IC	3.3V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
Gs	-	FP6801-21NC8P	Vdet-IC	2.1V±2%, -Reset ODO	SC-82	26vdf	VD1	5b	Fit
GT	-	MAX6315US28D1-T	Vdet-IC	2.8V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
GU	-	MAX6315US27D1-T	Vdet-IC	2.7V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
Gv	-	FP6801-22CC8P	Vdet-IC	2.2V±2%, -Reset PPO	SC-82	26vdf	VD3	5b	Fit
GV	-	MAX6315US26D1-T	Vdet-IC	2.63V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
Gw	-	FP6801-26CC8P	Vdet-IC	2.6V±2%, -Reset PPO	SC-82	26vdf	VD3	5b	Fit
GW	-	MAX6315US25D1-T	Vdet-IC	2.5V±1.8%, -MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Max
Gx	-	FP6801-29CC8P	Vdet-IC	2.9V±2%, -Reset PPO	SC-82	26vdf	VD3	5b	Fit
GX	-	MAX6315US50D2-T	Vdet-IC	5.0V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
GY	-	MAX6315US49D2-T	Vdet-IC	4.9V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
Gz	-	FP6801-31CC8P	Vdet-IC	3.1V±2%, -Reset PPO	SC-82	26vdf	VD3	5b	Fit
GZ	-	MAX6315US48D2-T	Vdet-IC	4.8V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
H	gc	ELM7529NCB	Vdet-IC	2.9V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
H	gd	ELM7529CCB	Vdet-IC	2.9V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
H0	-	R1140Q401D	LVR-IC	LDO, 4.0V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
H0	-	R3114Q271C	Vdet-IC	2.7V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
H0	-	RP103Q281B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
H0	-	XC61CC6002N	Vdet-IC	6.0V±2%, +Reset PPO	SSOT-24	26vdl	VD7	5c	Tor
H0	-	XC6221B31BNR	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
H0	-	XC6224B081NR	LVR-IC	LDO, 0.8V±20mV, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
H1	-	R3114Q281C	Vdet-IC	2.8V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
H1	-	RP103Q281B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
H1	-	XC6221B32BNR	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
H1	-	XC6224B091NR	LVR-IC	LDO, 0.9V±20mV, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
H2	-	R3114Q291C	Vdet-IC	2.9V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
H2	-	RP103Q291B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
H2	-	XC6221B33BNR	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
H2	-	XC6224B101NR	LVR-IC	LDO, 1.0V±20mV, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
H3	-	R3114Q301C	Vdet-IC	3V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
H3	-	RP103Q301B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
H3	-	XC6221B34BNR	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
H3	-	XC6224B111NR	LVR-IC	LDO, 1.1V±20mV, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
H3s	-	CFH120-08	HEMT	GaAs, LN, UHF, 4V, 40mA, 180mW, 12GHz, 12.0dB	MW-4	25fp	-	5b	Inf
H4	-	R3114Q311C	Vdet-IC	3.1V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
H4	-	RP103Q311B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
H4	-	RP103Q311D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
H4	-	XC6221B35BNR	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
H4	-	XC6224B121NR	LVR-IC	LDO, 1.2V±20mV, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
H4s	-	CFH120-10	HEMT	GaAs, LN, UHF, 4V, 40mA, 180mW, 12GHz, 11.0dB	MW-4	25fp	-	5b	Inf
H5	-	R3114Q321C	Vdet-IC	3.2V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
H5	-	RP103Q331B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
H5	-	XC6221B36BNR	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H5	-	XC6224B131NR	LVR-IC	LDO, 1.3V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
H6	-	R3114Q331C	Vdet-IC	3.3V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
H6	-	RP103Q231B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
H6	-	XC6221B37BNR	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
H6	-	XC6224B141NR	LVR-IC	LDO, 1.4V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
H7	-	R3114Q341C	Vdet-IC	3.4V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
H7	-	RP103Q211B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
H7	-	XC6221B38BNR	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
H7	-	XC6224B151NR	LVR-IC	LDO, 1.5V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
H8	-	AP8821N-08GI	Vdet-IC	0.8V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
H8	-	AP8821N-08GS	Vdet-IC	0.8V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
H8	-	AP8821N-08PI	Vdet-IC	0.8V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
H8	-	AP8821N-08PS	Vdet-IC	0.8V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
H8	-	R3114Q351C	Vdet-IC	3.5V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
H8	-	RP103Q321B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
H8	-	XC6221B39BNR	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
H8	-	XC6224B161NR	LVR-IC	LDO, 1.6V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
H9	-	AP8821N-09GI	Vdet-IC	0.9V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
H9	-	AP8821N-09GS	Vdet-IC	0.9V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
H9	-	AP8821N-09PI	Vdet-IC	0.9V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
H9	-	AP8821N-09PS	Vdet-IC	0.9V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
H9	-	R3114Q361C	Vdet-IC	3.6V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
H9	-	RP103Q291B5	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
H9	-	XC6221B44BNR	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
H9	-	XC6224B171NR	LVR-IC	LDO, 1.7V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
HA	-	BU4809F	Vdet-IC	0.9V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HA	-	MAX6315US47D2-T	Vdet-IC	4.7V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HA	-	R1141Q401D	LVR-IC	LDO, 4.0V±2%, 120mA, +CE, CL	SOT-143R	26vm	VR4	5m	Ric
HA	-	RP130Q301B	LVR-IC	LDO, LN, +CE, 3V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
HA	-	XC6127C16BNR	Vdet-IC	1.6V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HA	-	XC6127N16GNR	Vdet-IC	1.6V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HA	-	XC6224B181NR	LVR-IC	LDO, 1.8V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
HA	-	XC6501B421NR-G	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HB	-	BU4810F	Vdet-IC	1.0V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HB	-	MAX6315US46D2-T	Vdet-IC	4.63V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HB	-	RP130Q311B	LVR-IC	LDO, LN, +CE, 3.1V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
HB	-	XC6127C18BNR	Vdet-IC	1.8V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HB	-	XC6127N18GNR	Vdet-IC	1.8V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HB	-	XC6224B191NR	LVR-IC	LDO, 1.9V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
HB	-	XC6501B42ANR-G	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HC	-	BU4811F	Vdet-IC	1.1V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HC	-	MAX6315US45D2-T	Vdet-IC	4.5V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HC	-	RP130Q321B	LVR-IC	LDO, LN, +CE, 3.2V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
HC	-	XC6127C20BNR	Vdet-IC	2.0V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HC	-	XC6127N20GNR	Vdet-IC	2.0V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HC	-	XC6224B201NR	LVR-IC	LDO, 2.0V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
HC	-	XC6501B431NR-G	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HC10	-	HDC10CA	TVS	Vrwm=10V, 21.8A, 375W (1ms), Bidir.	SOP-4	23	-	5b	Di
HC12	-	HDC12CA	TVS	Vrwm=12V, 18.6A, 375W (1ms), Bidir.	SOP-4	23	-	5b	Di
HC15	-	HDC15CA	TVS	Vrwm=15V, 15.2A, 375W (1ms), Bidir.	SOP-4	23	-	5b	Di
HC18	-	HDC18CA	TVS	Vrwm=18V, 12.7A, 375W (1ms), Bidir.	SOP-4	23	-	5b	Di
HC22	-	HDC22CA	TVS	Vrwm=22V, 10.4A, 375W (1ms), Bidir.	SOP-4	23	-	5b	Di
HC26	-	HDC26CA	TVS	Vrwm=26V, 8.8A, 375W (1ms), Bidir.	SOP-4	23	-	5b	Di
HC30	-	HDC30CA	TVS	Vrwm=30V, 7.6A, 375W (1ms), Bidir.	SOP-4	23	-	5b	Di
HC5	-	HDC5.0CA	TVS	Vrwm=5V, 40.2A, 375W (1ms), Bidir.	SOP-4	23	-	5b	Di
HC6	-	HDC6.0CA	TVS	Vrwm=6V, 35.9A, 375W (1ms), Bidir.	SOP-4	23	-	5b	Di
HC7	-	HDC7.0CA	TVS	Vrwm=7V, 30.8A, 375W (1ms), Bidir.	SOP-4	23	-	5b	Di
HC8	-	HDC8.0CA	TVS	Vrwm=8V, 27.2A, 375W (1ms), Bidir.	SOP-4	23	-	5b	Di
HD	-	BU4812F	Vdet-IC	1.2V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HD	-	MAX6315US44D2-T	Vdet-IC	4.39V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HD	-	RP130Q331B	LVR-IC	LDO, LN, +CE, 3.3V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
HD	-	XC6127C22BNR	Vdet-IC	2.2V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HD	-	XC6127N22GNR	Vdet-IC	2.2V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HD	-	XC6223F301NR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
HD	-	XC6501B43ANR-G	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HE	-	BU4813F	Vdet-IC	1.3V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HE	-	MAX6315US43D2-T	Vdet-IC	4.3V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HE	-	RP130Q341B	LVR-IC	LDO, LN, +CE, 3.4V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
HE	-	XC6127C24BNR	Vdet-IC	2.4V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HE	-	XC6127N24GNR	Vdet-IC	2.4V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HE	-	XC6223F311NR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
HE	-	XC6501B441NR-G	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HF	-	BU4814F	Vdet-IC	1.4V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HF	-	MAX6315US42D2-T	Vdet-IC	4.2V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HF	-	RP130Q351B	LVR-IC	LDO, LN, +CE, 3.5V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
HF	-	XC6127C26BNR	Vdet-IC	2.6V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HF	-	XC6127N26GNR	Vdet-IC	2.6V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HF	-	XC6223F321NR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
HF	-	XC6501B44ANR-G	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HG	-	BU4815F	Vdet-IC	1.5V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HG	-	MAX6315US41D2-T	Vdet-IC	4.1V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HG	-	RP130Q361B	LVR-IC	LDO, LN, +CE, 3.6V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
HH	-	BU4816F	Vdet-IC	1.6V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HH	-	MAX6315US40D2-T	Vdet-IC	4.0V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HH	-	RP130Q371B	LVR-IC	LDO, LN, +CE, 3.7V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
HH	-	XC6127C28BNR	Vdet-IC	2.8V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HH	-	XC6127N28GNR	Vdet-IC	2.8V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HH	-	XC6223F331NR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
HH	-	XC6501B451NR-G	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HI	-	MAX6315US39D2-T	Vdet-IC	3.9V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HJ	-	2SC3828	Si-npn	TV-UHF-Tuner, 20V, 20mA, 150mW, 1,1GHz, B=40..100	SOT-143	26t9	-	5b	Tos
HJ	-	BU4817F	Vdet-IC	1.7V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HJ	-	MAX6315US38D2-T	Vdet-IC	3.8V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HJ	-	RP130Q381B	LVR-IC	LDO, LN, +CE, 3.8V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
HK	-	BU4818F	Vdet-IC	1.8V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HK	-	RP130Q391B	LVR-IC	LDO, LN, +CE, 3.9V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
HK	-	XC6127C30BNR	Vdet-IC	3.0V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HK	-	XC6127N30GNR	Vdet-IC	3.0V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HK	-	XC6223F341NR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
HK	-	XC6501B45ANR-G	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HL	-	AAT3527ICX-4.38-200	Vdet-IC	4.38V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5i	Ant
HL	-	BU4819F	Vdet-IC	1.9V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HL	-	XC6127C32BNR	Vdet-IC	3.2V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HL	-	XC6127N32GNR	Vdet-IC	3.2V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HL	-	XC6223F351NR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
HL	-	XC6501B461NR-G	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HM	-	AAT3527ICX-4.63-200	Vdet-IC	4.63V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5i	Ant
HM	-	BU4820F	Vdet-IC	2.0V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HM	-	MAX6315US35D2-T	Vdet-IC	3.5V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HM	-	XC6127C34BNR	Vdet-IC	3.4V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HM	-	XC6127N34GNR	Vdet-IC	3.4V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HM	-	XC6223F361NR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
HM	-	XC6501B46ANR-G	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HN	-	2SC4214	Si-npn	TV-Tuner-UHF, 25V, 20mA, 150mW, 850MHz, B~100	2-3J1B	26t9	-	5b	Tos
HN	-	BU4821F	Vdet-IC	2.1V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HN	-	MAX6315US34D2-T	Vdet-IC	3.4V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HN	-	XC6127C36BNR	Vdet-IC	3.6V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HN	-	XC6127N36GNR	Vdet-IC	3.6V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HN	-	XC6224B211NR	LVR-IC	LDO, 2.1V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
HN	-	XC6501B471NR-G	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HO	-	MAX6315US33D2-T	Vdet-IC	3.3V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HP	-	BU4822F	Vdet-IC	2.2V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HP	-	MAX6315US32D2-T	Vdet-IC	4.2V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HP	-	XC6127C38BNR	Vdet-IC	3.8V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HP	-	XC6127N38GNR	Vdet-IC	3.8V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HP	-	XC6223F371NR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
HP	-	XC6501B47ANR-G	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HQ	-	BU4823F	Vdet-IC	2.3V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HQ	-	MAX6315US31D2-T	Vdet-IC	3.08V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HR	-	BU4824F	Vdet-IC	2.4V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HR	-	MAX6315US30D2-T	Vdet-IC	3.0V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HR	-	XC6127C40BNR	Vdet-IC	4.0V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HR	-	XC6127N40GNR	Vdet-IC	4.0V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HR	-	XC6223F381NR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
HR	-	XC6501B481NR-G	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HS	-	BU4825F	Vdet-IC	2.5V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HS	-	MAX6315US29D2-T	Vdet-IC	2.93V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HS	-	XC6127C42BNR	Vdet-IC	4.2V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HS	-	XC6127N42GNR	Vdet-IC	4.2V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HS	-	XC6223F391NR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HS	-	XC6501B48ANR-G	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HT	-	BU4826F	Vdet-IC	2.6V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HT	-	MAX6315US28D2-T	Vdet-IC	2.8V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HT	-	XC6127C44BNR	Vdet-IC	4.4V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HT	-	XC6127N44GNR	Vdet-IC	4.4V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HT	-	XC6223F401NR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
HT	-	XC6501B491NR-G	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HU	-	BU4827F	Vdet-IC	2.7V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HU	-	MAX6315US27D2-T	Vdet-IC	2.7V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HU	-	XC6127C46BNR	Vdet-IC	4.6V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HU	-	XC6127N46GNR	Vdet-IC	4.6V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HU	-	XC6224B221NR	LVR-IC	LDO, 2.2V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
HU	-	XC6501B49ANR-G	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HV	-	3SK285	n-MOSFET	Dual gate, UHF, LN, 13V, ±30mA, 150mW, Idss=10..25mA	SOT-143	26fm	-	5b	Pan
HV	-	BU4828F	Vdet-IC	2.8V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HV	-	MAX6315US26D2-T	Vdet-IC	2.63V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HV	-	XC6127C48BNR	Vdet-IC	4.8V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HV	-	XC6127N48GNR	Vdet-IC	4.8V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HV	-	XC6224B231NR	LVR-IC	LDO, 2.3V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
HV	-	XC6501B501NR-G	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HW	-	3SK286	n-MOSFET	Dual gate, UHF, LN, 15V, ±30mA, 150mA, Idss=6..20mA	SOT-143	26fm	-	5b	Pan
HW	-	BU4829F	Vdet-IC	2.9V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HW	-	MAX6315US25D2-T	Vdet-IC	2.5V±1.8%, -MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Max
HX	-	BU4830F	Vdet-IC	3.0V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HX	-	MAX6315US50D3-T	Vdet-IC	5.0V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
HX	-	XC6127C50BNR	Vdet-IC	5.0V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HX	-	XC6127N50GNR	Vdet-IC	5.0V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HX	-	XC6221B45BNR	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HX	-	XC6224B241NR	LVR-IC	LDO, 2.4V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
HY	-	BU4831F	Vdet-IC	3.1V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HY	-	MAX6315US49D3-T	Vdet-IC	4.9V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
HY	-	XC6119N08ANR	Vdet-IC	0.8V±30mV, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
HY	-	XC6127C52BNR	Vdet-IC	5.2V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HY	-	XC6127N52GNR	Vdet-IC	5.2V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HY	-	XC6221B46BNR	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
HZ	-	BU4832F	Vdet-IC	3.2V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
HZ	-	MAX6315US48D3-T	Vdet-IC	4.8V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
HZ	-	XC6119N09ANR	Vdet-IC	0.9V±30mV, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
HZ	-	XC6127C54BNR	Vdet-IC	5.4V±0.8%, -Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
HZ	-	XC6127N54GNR	Vdet-IC	5.4V±0.8%, +Reset ODO, -MR, Rt=100ms	SSOT-24	26cr	VD4	5k	Tor
HZ	-	XC6221B47BNR	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
IA	-	MAX6315US47D3-T	Vdet-IC	4.7V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IB	-	MAX6315US46D3-T	Vdet-IC	4.63V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IC	-	MAX6315US45D3-T	Vdet-IC	4.5V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
ID	-	MAX6315US44D3-T	Vdet-IC	4.39V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IE	-	MAX6315US43D3-T	Vdet-IC	4.3V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IF	-	MAX6315US42D3-T	Vdet-IC	4.2V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IG	-	MAX6315US41D3-T	Vdet-IC	4.1V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IH	-	MAX6315US40D3-T	Vdet-IC	4.0V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
II	-	MAX6315US39D3-T	Vdet-IC	3.9V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IJ	-	MAX6315US38D3-T	Vdet-IC	3.8V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IK	-	MAX6315US37D3-T	Vdet-IC	3.7V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IL	-	MAX6315US36D3-T	Vdet-IC	3.6V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IM	-	MAX6315US35D3-T	Vdet-IC	3.5V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IN	-	MAX6315US34D3-T	Vdet-IC	3.4V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IO	-	MAX6315US33D3-T	Vdet-IC	3.3V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IP	-	MAX6315US32D3-T	Vdet-IC	3.2V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IQ	-	MAX6315US31D3-T	Vdet-IC	3.08V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IR	-	MAX6315US30D3-T	Vdet-IC	3.0V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IS	-	MAX6315US29D3-T	Vdet-IC	2.93V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IT	-	MAX6315US28D3-T	Vdet-IC	2.8V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IT-	-	3SK162	n-MOSFET	Dual gate, VHF, 12V, Idss=0..12mA	SOT-143	26fm	-	5c	Ren
IU	-	MAX6315US27D3-T	Vdet-IC	2.7V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IV	-	MAX6315US26D3-T	Vdet-IC	2.63V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IV-	-	3SK136	n-MOSFET	Dual gate, VHF, 20V, Idss>5mA, Up<3V	SOT-143	26fm	-	5c	Ren
IW	-	MAX6315US25D3-T	Vdet-IC	2.5V±1.8%, -MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Max
IW-	-	3SK137	n-MOSFET	Dual gate, UHF, 15V, Idss<20mA, Up<2V	SOT-143	26fm	-	5c	Ren
IX	-	MAX6315US50D4-T	Vdet-IC	5.0V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
IX-	-	3SK138	n-MOSFET	Dual gate, UHF, 15V, Idss<10mA, Up<1V	SOT-143	26fm	-	5c	Ren
IY	-	MAX6315US49D4-T	Vdet-IC	4.9V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
IY-	-	3SK194	n-MOSFET	Dual gate, VHF/UHF-Tuner, 15V, 35mA, Idss=0..10mA, Up<1.5V	SOT-143	26fm	-	5c	Ren
IZ	-	MAX6315US48D4-T	Vdet-IC	4.8V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
IZ2	-	3SK167-2	n-FET	GaAs, Dual gate, UHF, 12V, 55mA, 200mW, Idss=10..25mA	SOT-143	26fm	-	5c	San
IZ3	-	3SK167-3	n-FET	GaAs, Dual gate, UHF, 12V, 55mA, 200mW, Idss=20..35mA	SOT-143	26fm	-	5c	San
IZ4	-	3SK167-4	n-FET	GaAs, Dual gate, UHF, 12V, 55mA, 200mW, Idss=30..45mA	SOT-143	26fm	-	5c	San
IZ5	-	3SK167-5	n-FET	GaAs, Dual gate, UHF, 12V, 55mA, 200mW, Idss=40..55mA	SOT-143	26fm	-	5c	San
J	gc	ELM7530NCB	Vdet-IC	3.0V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
J	gd	ELM7530CCB	Vdet-IC	3.0V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
J0	-	AP8821N-10GI	Vdet-IC	1.0V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
J0	-	AP8821N-10GS	Vdet-IC	1.0V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
J0	-	AP8821N-10PI	Vdet-IC	1.0V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
J0	-	AP8821N-10PS	Vdet-IC	1.0V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
J0	-	R3114Q371C	Vdet-IC	3.7V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
J0	-	RP103Q121D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
J1	-	AP8821N-11GI	Vdet-IC	1.1V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
J1	-	AP8821N-11GS	Vdet-IC	1.1V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
J1	-	AP8821N-11PI	Vdet-IC	1.1V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
J1	-	AP8821N-11PS	Vdet-IC	1.1V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
J1	-	R3114Q381C	Vdet-IC	3.8V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
J1	-	RP103Q131D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
J2	-	AP8821N-12GI	Vdet-IC	1.2V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
J2	-	AP8821N-12GS	Vdet-IC	1.2V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
J2	-	AP8821N-12PI	Vdet-IC	1.2V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
J2	-	AP8821N-12PS	Vdet-IC	1.2V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
J2	-	R3114Q391C	Vdet-IC	3.9V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
J2	-	RP103Q151D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
J3	-	AP8821N-13GI	Vdet-IC	1.3V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
J3	-	AP8821N-13GS	Vdet-IC	1.3V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
J3	-	AP8821N-13PI	Vdet-IC	1.3V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
J3	-	AP8821N-13PS	Vdet-IC	1.3V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
J3	-	R3114Q401C	Vdet-IC	4V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
J3	-	RP103Q181D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
J4	-	AP8821N-14GI	Vdet-IC	1.4V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
J4	-	AP8821N-14GS	Vdet-IC	1.4V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
J4	-	AP8821N-14PI	Vdet-IC	1.4V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
J4	-	AP8821N-14PS	Vdet-IC	1.4V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
J4	-	R3114Q411C	Vdet-IC	4.1V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
J4	-	RP103Q181D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
J5	-	AP8821N-15GI	Vdet-IC	1.5V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
J5	-	AP8821N-15GS	Vdet-IC	1.5V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
J5	-	AP8821N-15PI	Vdet-IC	1.5V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
J5	-	AP8821N-15PS	Vdet-IC	1.5V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
J5	-	R3114Q421C	Vdet-IC	4.2V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
J5	-	RP103Q191D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
J6	-	AP8821N-16GI	Vdet-IC	1.6V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
J6	-	AP8821N-16GS	Vdet-IC	1.6V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
J6	-	AP8821N-16PI	Vdet-IC	1.6V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
J6	-	AP8821N-16PS	Vdet-IC	1.6V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
J6	-	R3114Q431C	Vdet-IC	4.3V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
J6	-	RP103Q201D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
J7	-	AP8821N-17GI	Vdet-IC	1.7V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
J7	-	AP8821N-17GS	Vdet-IC	1.7V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
J7	-	AP8821N-17PI	Vdet-IC	1.7V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
J7	-	AP8821N-17PS	Vdet-IC	1.7V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
J7	-	R3114Q441C	Vdet-IC	4.4V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
J7	-	RP103Q251D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
J8	-	AP8821N-18GI	Vdet-IC	1.8V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
J8	-	AP8821N-18GS	Vdet-IC	1.8V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
J8	-	AP8821N-18PI	Vdet-IC	1.8V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
J8	-	AP8821N-18PS	Vdet-IC	1.8V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
J8	-	R3114Q451C	Vdet-IC	4.5V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
J8	-	RP103Q261D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
J9	-	AP8821N-19GI	Vdet-IC	1.9V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
J9	-	AP8821N-19GS	Vdet-IC	1.9V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
J9	-	AP8821N-19PI	Vdet-IC	1.9V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
J9	-	AP8821N-19PS	Vdet-IC	1.9V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
J9	-	R3114Q461C	Vdet-IC	4.6V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
J9	-	RP103Q271D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
JA	-	BU4833F	Vdet-IC	3.3V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
JA	-	MAX6315US47D4-T	Vdet-IC	4.7V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JA	-	RP130Q401B	LVR-IC	LDO, LN, +CE, 4V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
JA2	-	S-80141ALPF-JA2-T2	Vdet-IC	4.1V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JA3	-	S-80142ALPF-JA3-T2	Vdet-IC	4.2V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JA4	-	S-80143ALPF-JA4-T2	Vdet-IC	4.3V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JA5	-	S-80144ALPF-JA5-T2	Vdet-IC	4.4V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JA6	-	S-80145ALPF-JA6-T2	Vdet-IC	4.5V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JA7	-	S-80146ALPF-JA7-T2	Vdet-IC	4.6V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JA8	-	S-80147ALPF-JA8-T2	Vdet-IC	4.7V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JA9	-	S-80148ALPF-JA9-T2	Vdet-IC	4.8V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAH	-	S-80122ALPF-JAH-T2	Vdet-IC	2.2V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAI	-	S-80123ALPF-JAI-T2	Vdet-IC	2.3V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAJ	-	S-80124ALPF-JAJ-T2	Vdet-IC	2.4V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAK	-	S-80125ALPF-JAK-T2	Vdet-IC	2.5V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAL	-	S-80126ALPF-JAL-T2	Vdet-IC	2.6V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAM	-	S-80127ALPF-JAM-T2	Vdet-IC	2.7V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAN	-	S-80128ALPF-JAN-T2	Vdet-IC	2.8V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAO	-	S-80129ALPF-JAO-T2	Vdet-IC	2.9V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAP	-	S-80130ALPF-JAP-T2	Vdet-IC	3.0V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAQ	-	S-80131ALPF-JAQ-T2	Vdet-IC	3.1V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAR	-	S-80132ALPF-JAR-T2	Vdet-IC	3.2V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAS	-	S-80133ALPF-JAS-T2	Vdet-IC	3.3V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAT	-	S-80134ALPF-JAT-T2	Vdet-IC	3.4V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAU	-	S-80135ALPF-JAU-T2	Vdet-IC	3.5V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAV	-	S-80136ALPF-JAV-T2	Vdet-IC	3.6V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAW	-	S-80137ALPF-JAW-T2	Vdet-IC	3.7V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAX	-	S-80138ALPF-JAX-T2	Vdet-IC	3.8V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAY	-	S-80139ALPF-JAY-T2	Vdet-IC	3.9V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JAZ	-	S-80140ALPF-JAZ-T2	Vdet-IC	4.0V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JB	-	BU4834F	Vdet-IC	3.4V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
JB	-	MAX6315US46D4-T	Vdet-IC	4.63V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JB	-	RP130Q411B	LVR-IC	LDO, LN, +CE, 4.1V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
JBA	-	S-80149ALPF-JBA-T2	Vdet-IC	4.9V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JBB	-	S-80150ALPF-JBB-T2	Vdet-IC	5.0V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JBC	-	S-80151ALPF-JBC-T2	Vdet-IC	5.1V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JBD	-	S-80152ALPF-JBD-T2	Vdet-IC	5.2V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JBE	-	S-80153ALPF-JBE-T2	Vdet-IC	5.3V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JBF	-	S-80154ALPF-JBF-T2	Vdet-IC	5.4V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JBG	-	S-80155ALPF-JBG-T2	Vdet-IC	5.5V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JBH	-	S-80156ALPF-JBH-T2	Vdet-IC	5.6V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JBI	-	S-80157ALPF-JBI-T2	Vdet-IC	5.7V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JBJ	-	S-80158ALPF-JBJ-T2	Vdet-IC	5.8V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JBK	-	S-80159ALPF-JBK-T2	Vdet-IC	5.9V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JBL	-	S-80160ALPF-JBL-T2	Vdet-IC	6V±2%, -Reset PPO, Td=50ms	SNT-4	42ye	VD3	5e	Sii
JC	-	BU4835F	Vdet-IC	3.5V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
JC	-	MAX6315US45D4-T	Vdet-IC	4.5V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JC	-	RP130Q421B	LVR-IC	LDO, LN, +CE, 4.2V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
JC2	-	S-80141ANPF-JC2-T2	Vdet-IC	4.1V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JC3	-	S-80142ANPF-JC3-T2	Vdet-IC	4.2V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JC4	-	S-80143ANPF-JC4-T2	Vdet-IC	4.3V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JC5	-	S-80144ANPF-JC5-T2	Vdet-IC	4.4V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JC6	-	S-80145ANPF-JC6-T2	Vdet-IC	4.5V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JC7	-	S-80146ANPF-JC7-T2	Vdet-IC	4.6V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JC8	-	S-80147ANPF-JC8-T2	Vdet-IC	4.7V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JC9	-	S-80148ANPF-JC9-T2	Vdet-IC	4.8V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCH	-	S-80122ANPF-JCH-T2	Vdet-IC	2.2V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCI	-	S-80123ANPF-JCI-T2	Vdet-IC	2.3V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCJ	-	S-80124ANPF-JCJ-T2	Vdet-IC	2.4V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCK	-	S-80125ANPF-JCK-T2	Vdet-IC	2.5V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCL	-	S-80126ANPF-JCL-T2	Vdet-IC	2.6V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCM	-	S-80127ANPF-JCM-T2	Vdet-IC	2.7V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCN	-	S-80128ANPF-JCN-T2	Vdet-IC	2.8V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCO	-	S-80129ANPF-JCO-T2	Vdet-IC	2.9V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCP	-	S-80130ANPF-JCP-T2	Vdet-IC	3.0V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCQ	-	S-80131ANPF-JCQ-T2	Vdet-IC	3.1V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCR	-	S-80132ANPF-JCR-T2	Vdet-IC	3.2V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCS	-	S-80133ANPF-JCS-T2	Vdet-IC	3.3V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCT	-	S-80134ANPF-JCT-T2	Vdet-IC	3.4V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCU	-	S-80135ANPF-JCU-T2	Vdet-IC	3.5V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCV	-	S-80136ANPF-JCV-T2	Vdet-IC	3.6V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCW	-	S-80137ANPF-JCW-T2	Vdet-IC	3.7V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JCX	-	S-80138ANPF-JCX-T2	Vdet-IC	3.8V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCY	-	S-80139ANPF-JCY-T2	Vdet-IC	3.9V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JCZ	-	S-80140ANPF-JCZ-T2	Vdet-IC	4.0V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JD	-	BU4836F	Vdet-IC	3.6V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
JD	-	MAX6315US44D4-T	Vdet-IC	4.39V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JD	-	RP130Q431B	LVR-IC	LDO, LN, +CE, 4.3V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
JDA	-	S-80149ANPF-JDA-T2	Vdet-IC	4.9V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JDB	-	S-80150ANPF-JDB-T2	Vdet-IC	5.0V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JDC	-	S-80151ANPF-JDC-T2	Vdet-IC	5.1V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JDD	-	S-80152ANPF-JDD-T2	Vdet-IC	5.2V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JDE	-	S-80153ANPF-JDE-T2	Vdet-IC	5.3V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JDF	-	S-80154ANPF-JDF-T2	Vdet-IC	5.4V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JDG	-	S-80155ANPF-JDG-T2	Vdet-IC	5.5V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JDH	-	S-80156ANPF-JDH-T2	Vdet-IC	5.6V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JDI	-	S-80157ANPF-JDI-T2	Vdet-IC	5.7V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JDJ	-	S-80158ANPF-JDJ-T2	Vdet-IC	5.8V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JDK	-	S-80159ANPF-JDK-T2	Vdet-IC	5.9V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JDL	-	S-80160ANPF-JDL-T2	Vdet-IC	6.0V±2%, -Reset ODO, Td=50ms	SNT-4	42ye	VD1	5e	Sii
JE	-	BU4837F	Vdet-IC	3.7V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
JE	-	MAX6315US43D4-T	Vdet-IC	4.3V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JE	-	RP130Q441B	LVR-IC	LDO, LN, +CE, 4.4V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
JE2	-	S-80141BLPF-JE2-T2	Vdet-IC	4.1V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JE3	-	S-80142BLPF-JE3-T2	Vdet-IC	4.2V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JE4	-	S-80143BLPF-JE4-T2	Vdet-IC	4.3V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JE5	-	S-80144BLPF-JE5-T2	Vdet-IC	4.4V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JE6	-	S-80145BLPF-JE6-T2	Vdet-IC	4.5V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JE7	-	S-80146BLPF-JE7-T2	Vdet-IC	4.6V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JE8	-	S-80147BLPF-JE8-T2	Vdet-IC	4.7V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JE9	-	S-80148BLPF-JE9-T2	Vdet-IC	4.8V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JEH	-	S-80122BLPF-JEH-T2	Vdet-IC	2.2V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JEI	-	S-80123BLPF-JEI-T2	Vdet-IC	2.3V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JEJ	-	S-80124BLPF-JEJ-T2	Vdet-IC	2.4V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JEK	-	S-80125BLPF-JEK-T2	Vdet-IC	2.5V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JEL	-	S-80126BLPF-JEL-T2	Vdet-IC	2.6V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JEM	-	S-80127BLPF-JEM-T2	Vdet-IC	2.7V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JEN	-	S-80128BLPF-JEN-T2	Vdet-IC	2.8V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JEO	-	S-80129BLPF-JEO-T2	Vdet-IC	2.9V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JEP	-	S-80130BLPF-JEP-T2	Vdet-IC	3.0V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JEQ	-	S-80131BLPF-JEQ-T2	Vdet-IC	3.1V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JER	-	S-80132BLPF-JER-T2	Vdet-IC	3.2V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JES	-	S-80133BLPF-JES-T2	Vdet-IC	3.3V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JET	-	S-80134BLPF-JET-T2	Vdet-IC	3.4V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JEU	-	S-80135BLPF-JEU-T2	Vdet-IC	3.5V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JEV	-	S-80136BLPF-JEV-T2	Vdet-IC	3.6V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JEW	-	S-80137BLPF-JEW-T2	Vdet-IC	3.7V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JEX	-	S-80138BLPF-JEX-T2	Vdet-IC	3.8V±2% -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JEY	-	S-80139BLPF-JEY-T2	Vdet-IC	3.9V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JEZ	-	S-80140BLPF-JEZ-T2	Vdet-IC	4.0V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JF	-	BU4838F	Vdet-IC	3.8V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
JF	-	MAX6315US42D4-T	Vdet-IC	4.2V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JF	-	R1114Q151A	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
JF	-	RP130Q451B	LVR-IC	LDO, LN, +CE, 4.5V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
JFA	-	S-80149BLPF-JFA-T2	Vdet-IC	4.9V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JFB	-	S-80150BLPF-JFB-T2	Vdet-IC	5.0V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JFC	-	S-80151BLPF-JFC-T2	Vdet-IC	5.1V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JFD	-	S-80152BLPF-JFD-T2	Vdet-IC	5.2V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JFE	-	S-80153BLPF-JFE-T2	Vdet-IC	5.3V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JFF	-	S-80154BLPF-JFF-T2	Vdet-IC	5.4V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JFG	-	S-80155BLPF-JFG-T2	Vdet-IC	5.5V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JFH	-	S-80156BLPF-JFH-T2	Vdet-IC	5.6V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JFI	-	S-80157BLPF-JFI-T2	Vdet-IC	5.7V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JFJ	-	S-80158BLPF-JFJ-T2	Vdet-IC	5.8V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JFK	-	S-80159BLPF-JFK-T2	Vdet-IC	5.9V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JFL	-	S-80160BLPF-JFL-T2	Vdet-IC	6.0V±2%, -Reset PPO, Td=100ms	SNT-4	42ye	VD3	5e	Sii
JG	-	BU4839F	Vdet-IC	3.9V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
JG	-	MAX6315US41D4-T	Vdet-IC	4.1V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JG	-	R1114Q161A	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
JG	-	RP130Q461B	LVR-IC	LDO, LN, +CE, 4.6V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
JG2	-	S-80141BNPF-JG2-T2	Vdet-IC	4.1V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JG3	-	S-80142BNPF-JG3-T2	Vdet-IC	4.2V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JG4	-	S-80143BNPF-JG4-T2	Vdet-IC	4.3V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JG5	-	S-80144BNPF-JG5-T2	Vdet-IC	4.4V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JG6	-	S-80145BNPF-JG6-T2	Vdet-IC	4.5V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JG7	-	S-80146BNPF-JG7-T2	Vdet-IC	4.6V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JG8	-	S-80147BNPF-JG8-T2	Vdet-IC	4.7V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JG9	-	S-80148BNPF-JG9-T2	Vdet-IC	4.8V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGH	-	S-80122BNPF-JGH-T2	Vdet-IC	2.2V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGI	-	S-80123BNPF-JGI-T2	Vdet-IC	2.3V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGJ	-	S-80124BNPF-JGJ-T2	Vdet-IC	2.4V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGK	-	S-80125BNPF-JGK-T2	Vdet-IC	2.5V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGL	-	S-80126BNPF-JGL-T2	Vdet-IC	2.6V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGM	-	S-80127BNPF-JGM-T2	Vdet-IC	2.7V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGN	-	S-80128BNPF-JGN-T2	Vdet-IC	2.8V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGO	-	S-80129BNPF-JGO-T2	Vdet-IC	2.9V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGP	-	S-80130BNPF-JGP-T2	Vdet-IC	3.0V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGQ	-	S-80131BNPF-JGQ-T2	Vdet-IC	3.1V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGR	-	S-80132BNPF-JGR-T2	Vdet-IC	3.2V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGS	-	S-80133BNPF-JGS-T2	Vdet-IC	3.3V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGT	-	S-80134BNPF-JGT-T2	Vdet-IC	3.4V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGU	-	S-80135BNPF-JGU-T2	Vdet-IC	3.5V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGV	-	S-80136BNPF-JGV-T2	Vdet-IC	3.6V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGW	-	S-80137BNPF-JGW-T2	Vdet-IC	3.7V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGX	-	S-80138BNPF-JGX-T2	Vdet-IC	3.8V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGY	-	S-80139BNPF-JGY-T2	Vdet-IC	3.9V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JGZ	-	S-80140BNPF-JGZ-T2	Vdet-IC	4.0V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JH	-	BU4840F	Vdet-IC	4.0V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
JH	-	MAX6315US40D4-T	Vdet-IC	4.0V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JH	-	R1114Q171A	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
JH	-	RP130Q471B	LVR-IC	LDO, LN, +CE, 4.7V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
JHA	-	S-80149BNPF-JHA-T2	Vdet-IC	4.9V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JHB	-	S-80150BNPF-JHB-T2	Vdet-IC	5.0V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JHC	-	S-80151BNPF-JHC-T2	Vdet-IC	5.1V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JHD	-	S-80152BNPF-JHD-T2	Vdet-IC	5.2V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JHE	-	S-80153BNPF-JHE-T2	Vdet-IC	5.3V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JHF	-	S-80154BNPF-JHF-T2	Vdet-IC	5.4V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JHG	-	S-80155BNPF-JHG-T2	Vdet-IC	5.5V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JHH	-	S-80156BNPF-JHH-T2	Vdet-IC	5.6V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JHI	-	S-80157BNPF-JHI-T2	Vdet-IC	5.7V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JHJ	-	S-80158BNPF-JHJ-T2	Vdet-IC	5.8V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JHK	-	S-80159BNPF-JHK-T2	Vdet-IC	5.9V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JHL	-	S-80160BNPF-JHL-T2	Vdet-IC	6.0V±2%, -Reset ODO, Td=100ms	SNT-4	42ye	VD1	5e	Sii
JI	-	MAX6315US39D4-T	Vdet-IC	3.9V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JI2	-	S-80141CLPF-JI2-T2	Vdet-IC	4.1V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JI3	-	S-80142CLPF-JI3-T2	Vdet-IC	4.2V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JI4	-	S-80143CLPF-JI4-T2	Vdet-IC	4.3V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JI5	-	S-80144CLPF-JI5-T2	Vdet-IC	4.4V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JI6	-	S-80145CLPF-JI6-T2	Vdet-IC	4.5V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JI7	-	S-80146CLPF-JI7-T2	Vdet-IC	4.6V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JI8	-	S-80147CLPF-JI8-T2	Vdet-IC	4.7V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JI9	-	S-80148CLPF-JI9-T2	Vdet-IC	4.8V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIH	-	S-80122CLPF-JIH-T2	Vdet-IC	2.2V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JII	-	S-80123CLPF-JII-T2	Vdet-IC	2.3V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIJ	-	S-80124CLPF-JIJ-T2	Vdet-IC	2.4V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIK	-	S-80125CLPF-JIK-T2	Vdet-IC	2.5V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIL	-	S-80126CLPF-JIL-T2	Vdet-IC	2.6V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIM	-	S-80127CLPF-JIM-T2	Vdet-IC	2.7V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIN	-	S-80128CLPF-JIN-T2	Vdet-IC	2.8V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIO	-	S-80129CLPF-JIO-T2	Vdet-IC	2.9V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIP	-	S-80130CLPF-JIP-T2	Vdet-IC	3.0V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIQ	-	S-80131CLPF-JIQ-T2	Vdet-IC	3.1V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIR	-	S-80132CLPF-JIR-T2	Vdet-IC	3.2V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIS	-	S-80133CLPF-JIS-T2	Vdet-IC	3.3V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIT	-	S-80134CLPF-JIT-T2	Vdet-IC	3.4V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIU	-	S-80135CLPF-JIU-T2	Vdet-IC	3.5V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIV	-	S-80136CLPF-JIV-T2	Vdet-IC	3.6V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIW	-	S-80137CLPF-JIW-T2	Vdet-IC	3.7V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIX	-	S-80138CLPF-JGX-T2	Vdet-IC	3.8V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIY	-	S-80139CLPF-JIY-T2	Vdet-IC	3.9V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JIZ	-	S-80140CLPF-JIZ-T2	Vdet-IC	4.0V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JJ	-	BU4841F	Vdet-IC	4.1V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JJ	-	MAX6315US38D4-T	Vdet-IC	3.8V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JJ	-	R1114Q181A	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
JJ	-	RP130Q481B	LVR-IC	LDO, LN, +CE, 4.8V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
JJA	-	S-80149CLPF-JJA-T2	Vdet-IC	4.9V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JJB	-	S-80150CLPF-JJB-T2	Vdet-IC	5.0V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JJC	-	S-80151CLPF-JHC-T2	Vdet-IC	5.1V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JJD	-	S-80152CLPF-JJD-T2	Vdet-IC	5.2V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JJE	-	S-80153CLPF-JJE-T2	Vdet-IC	5.3V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JJF	-	S-80154CLPF-JJF-T2	Vdet-IC	5.4V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JJG	-	S-80155CLPF-JJG-T2	Vdet-IC	5.5V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JJH	-	S-80156CLPF-JJH-T2	Vdet-IC	5.6V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JJI	-	S-80157CLPF-JJI-T2	Vdet-IC	5.7V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JJJ	-	S-80158CLPF-JJJ-T2	Vdet-IC	5.8V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JJK	-	S-80159CLPF-JJK-T2	Vdet-IC	5.9V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JJL	-	S-80160CLPF-JJL-T2	Vdet-IC	6.0V±2%, -Reset PPO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JK	-	BU4842F	Vdet-IC	4.2V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
JK	-	MAX6315US37D4-T	Vdet-IC	3.7V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JK	-	R1114Q191A	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
JK	-	RP130Q491B	LVR-IC	LDO, LN, +CE, 4.9V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
JK2	-	S-80141CNPF-JK2-T2	Vdet-IC	4.1V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JK3	-	S-80142CNPF-JK3-T2	Vdet-IC	4.2V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JK4	-	S-80143CNPF-JK4-T2	Vdet-IC	4.3V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JK5	-	S-80144CNPF-JK5-T2	Vdet-IC	4.4V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JK6	-	S-80145CNPF-JK6-T2	Vdet-IC	4.5V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JK7	-	S-80146CNPF-JK7-T2	Vdet-IC	4.6V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JK8	-	S-80147CNPF-JK8-T2	Vdet-IC	4.7V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JK9	-	S-80148CNPF-JK9-T2	Vdet-IC	4.8V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKH	-	S-80122CNPF-JKH-T2	Vdet-IC	2.2V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKI	-	S-80123CNPF-JKI-T2	Vdet-IC	2.3V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKJ	-	S-80124CNPF-JKJ-T2	Vdet-IC	2.4V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKK	-	S-80125CNPF-JKK-T2	Vdet-IC	2.5V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKL	-	S-80126CNPF-JKL-T2	Vdet-IC	2.6V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKM	-	S-80127CNPF-JKM-T2	Vdet-IC	2.7V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKN	-	S-80128CNPF-JKN-T2	Vdet-IC	2.8V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKO	-	S-80129CNPF-JKO-T2	Vdet-IC	2.9V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKP	-	S-80130CNPF-JKP-T2	Vdet-IC	3.0V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKQ	-	S-80131CNPF-JKQ-T2	Vdet-IC	3.1V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKR	-	S-80132CNPF-JKR-T2	Vdet-IC	3.2V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKS	-	S-80133CNPF-JKS-T2	Vdet-IC	3.3V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKT	-	S-80134CNPF-JKT-T2	Vdet-IC	3.4V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKU	-	S-80135CNPF-JKU-T2	Vdet-IC	3.5V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKV	-	S-80136CNPF-JKV-T2	Vdet-IC	3.6V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKW	-	S-80137CNPF-JKW-T2	Vdet-IC	3.7V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKX	-	S-80138CNPF-JKX-T2	Vdet-IC	3.8V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKY	-	S-80139CNPF-JKY-T2	Vdet-IC	3.9V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JKZ	-	S-80140CNPF-JKZ-T2	Vdet-IC	4.0V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JL	-	BU4843F	Vdet-IC	4.3V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
JL	-	MAX6315US36D4-T	Vdet-IC	3.6V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JLA	-	S-80149CNPF-JLA-T2	Vdet-IC	4.9V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD3	5e	Sii
JLB	-	S-80150CNPF-JLB-T2	Vdet-IC	5.0V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JLC	-	S-80151CNPF-JLC-T2	Vdet-IC	5.1V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JLD	-	S-80152CNPF-JLD-T2	Vdet-IC	5.2V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JLE	-	S-80153CNPF-JLE-T2	Vdet-IC	5.3V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JLF	-	S-80154CNPF-JLF-T2	Vdet-IC	5.4V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JLG	-	S-80155CNPF-JLG-T2	Vdet-IC	5.5V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JLH	-	S-80156CNPF-JLH-T2	Vdet-IC	5.6V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JLI	-	S-80157CNPF-JLI-T2	Vdet-IC	5.7V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JLJ	-	S-80158CNPF-JLJ-T2	Vdet-IC	5.8V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JLK	-	S-80159CNPF-JLK-T2	Vdet-IC	5.9V±2%, -Reset ODO, Td=200ms	SNT-4	42ye	VD1	5e	Sii
JLL	-	S-80160CNPF-JLL-T2	Vdet-IC	6.0V±2%, -Reset ODO, 200ms	SNT-4	42ye	VD1	5e	Sii
JLs	-	BF1109S	n-MOSFET	Dual gate, VHF, UHF, 12V, 25mA, 200mW	SOT-143	24fd	-	5h	Inf
JLs	-	BF1109SR	n-MOSFET	Dual gate, VHF, UHF, 12V, 25mA, 200mW	SOT-143R	26fm	-	5h	Inf
JM	-	BU4844F	Vdet-IC	4.4V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
JM	-	MAX6315US35D4-T	Vdet-IC	3.5V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JN	-	BU4845F	Vdet-IC	4.5V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
JN	-	MAX6315US34D4-T	Vdet-IC	3.4V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JO	-	MAX6315US33D4-T	Vdet-IC	3.3V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JP	-	BU4846F	Vdet-IC	4.6V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
JP	-	MAX6315US32D4-T	Vdet-IC	3.2V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JPs	-	BAW101	Si-diode	Dual, Sw, 300V, 250mA, Vf<1.3V(100mA), 1µs	SOT-143	24ce	-	5h	Inf



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JQ	-	BU4847F	Vdet-IC	4.7V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
JQ	-	MAX6315US31D4-T	Vdet-IC	3.08V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JR	-	BU4848F	Vdet-IC	4.8V±1%, -Reset ODO	SOP-4	23vdl	VD6	5n	Rhm
JR	-	MAX6315US30D4-T	Vdet-IC	3.0V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
js	-	PT7M6218CLC4	Vdet-IC	1.8V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
js	gb	PT7M6218CLC4E	Vdet-IC	1.8V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
JS	-	BU4909F	Vdet-IC	0.9V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
JS	-	MAX6315US29D4-T	Vdet-IC	2.93V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
jt	-	PT7M6218CHC4	Vdet-IC	1.8V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
jt	gb	PT7M6218CHC4E	Vdet-IC	1.8V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
JT	-	BU4910F	Vdet-IC	1.0V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
JT	-	MAX6315US28D4-T	Vdet-IC	2.8V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
JTp	-	BAS28	Si-diode	Dual, Fast Sw, 75V, 250mA, Vf<1.25V(150mA), <6ns	SOT-143	24ce	-	5b	Phi
JTs	-	BAS28	Si-diode	Dual, Fast Sw, 75V, 250mA, Vf<1.25V(150mA), <6ns	SOT-143	24ce	-	5c	Inf
JTs	-	BAS28W	Si-diode	Dual, Fast Sw, 75V, 250mA, Vf<1.25V(150mA), <6ns	SOT-343	26ce	-	5c	Inf
ju	-	PT7M6218NLC4	Vdet-IC	1.8V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
ju	gb	PT7M6218NLC4E	Vdet-IC	1.8V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
JU	-	BU4911F	Vdet-IC	1.1V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
JU	-	MAX6315US27D4-T	Vdet-IC	2.7V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
jv	-	PT7M6219CLC4	Vdet-IC	1.9V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
jv	gb	PT7M6219CLC4E	Vdet-IC	1.9V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
JV	-	BU4912F	Vdet-IC	1.2V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
JV	-	MAX6315US26D4-T	Vdet-IC	2.63V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
jw	-	PT7M6219CHC4	Vdet-IC	1.9V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
jw	gb	PT7M6219CHC4E	Vdet-IC	1.9V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
JW	-	BU4913F	Vdet-IC	1.3V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
JW	-	MAX6315US25D4-T	Vdet-IC	2.5V±1.8%, -MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Max
jx	-	PT7M6219NLC4	Vdet-IC	1.9V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
jx	gb	PT7M6219NLC4E	Vdet-IC	1.9V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
JX	-	BU4914F	Vdet-IC	1.4V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
jy	-	PT7M6220CLC4	Vdet-IC	2.0V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
jy	gb	PT7M6220CLC4E	Vdet-IC	2.0V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
JY	-	BU4915F	Vdet-IC	1.5V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
jz	-	PT7M6220CHC4	Vdet-IC	2.0V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
jz	gb	PT7M6220CHC4E	Vdet-IC	2.0V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
JZ	-	BU4916F	Vdet-IC	1.6V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
K	gc	ELM7531NCB	Vdet-IC	3.1V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
K	gd	ELM7531CCB	Vdet-IC	3.1V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
K0	-	AP8821N-20GI	Vdet-IC	2.0V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
K0	-	AP8821N-20GS	Vdet-IC	2.0V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
K0	-	AP8821N-20PI	Vdet-IC	2.0V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
K0	-	AP8821N-20PS	Vdet-IC	2.0V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
K0	-	R3114Q471C	Vdet-IC	4.7V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
K0	-	RP103Q281D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
K0	-	XC6225B12ANR-G	LVR-IC	LDO, 1.25V±30mV, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
K1	-	AP8821N-21GI	Vdet-IC	2.1V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
K1	-	AP8821N-21GS	Vdet-IC	2.1V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
K1	-	AP8821N-21PI	Vdet-IC	2.1V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
K1	-	AP8821N-21PS	Vdet-IC	2.1V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
K1	-	R3114Q481C	Vdet-IC	4.8V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
K1	-	RP103Q281D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
K1	-	XC6225B132NR-G	LVR-IC	LDO, 1.3V±30mV, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
K2	-	AP8821N-22GI	Vdet-IC	2.2V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
K2	-	AP8821N-22GS	Vdet-IC	2.2V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
K2	-	AP8821N-22PI	Vdet-IC	2.2V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
K2	-	AP8821N-22PS	Vdet-IC	2.2V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
K2	-	R3114Q491C	Vdet-IC	4.9V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
K2	-	RP103Q291D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
K2	-	XC6223E121NR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
K2	-	XC6225B13ANR-G	LVR-IC	LDO, 1.35V±30mV, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
K3	-	AP8821N-23GI	Vdet-IC	2.3V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
K3	-	AP8821N-23GS	Vdet-IC	2.3V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
K3	-	AP8821N-23PI	Vdet-IC	2.3V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
K3	-	AP8821N-23PS	Vdet-IC	2.3V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
K3	-	R3114Q501C	Vdet-IC	5V±0.8%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
K3	-	RP103Q301D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
K3	-	XC6223E131NR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
K3	-	XC6225B142NR-G	LVR-IC	LDO, 1.4V±30mV, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
K4	-	AP8821N-24GI	Vdet-IC	2.4V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
K4	-	AP8821N-24GS	Vdet-IC	2.4V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K4	-	AP8821N-24PI	Vdet-IC	2.4V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
K4	-	AP8821N-24PS	Vdet-IC	2.4V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
K4	-	XC6223E141NR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
K4	-	XC6225B14ANR-G	LVR-IC	LDO, 1.45V±30mV, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
K5	-	AP8821N-25GI	Vdet-IC	2.5V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
K5	-	AP8821N-25GS	Vdet-IC	2.5V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
K5	-	AP8821N-25PI	Vdet-IC	2.5V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
K5	-	AP8821N-25PS	Vdet-IC	2.5V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
K5	-	RP103Q331D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
K5	-	XC6223E151NR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
K5	-	XC6225B152NR-G	LVR-IC	LDO, 1.5V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
K6	-	AP8821N-26GI	Vdet-IC	2.6V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
K6	-	AP8821N-26GS	Vdet-IC	2.6V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
K6	-	AP8821N-26PI	Vdet-IC	2.6V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
K6	-	AP8821N-26PS	Vdet-IC	2.6V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
K6	-	RP103Q231D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
K6	-	XC6223E161NR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
K6	-	XC6225B15ANR-G	LVR-IC	LDO, 1.55V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
K7	-	AP8821N-27GI	Vdet-IC	2.7V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
K7	-	AP8821N-27GS	Vdet-IC	2.7V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
K7	-	AP8821N-27PI	Vdet-IC	2.7V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
K7	-	AP8821N-27PS	Vdet-IC	2.7V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
K7	-	RP103Q211D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
K7	-	XC6223E171NR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
K7	-	XC6225B162NR-G	LVR-IC	LDO, 1.6V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
K8	-	AP8821N-28GI	Vdet-IC	2.8V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
K8	-	AP8821N-28GS	Vdet-IC	2.8V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
K8	-	AP8821N-28PI	Vdet-IC	2.8V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
K8	-	AP8821N-28PS	Vdet-IC	2.8V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
K8	-	RP103Q321D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
K8	-	XC61CN0802N	Vdet-IC	0.8V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
K8	-	XC6223E181NR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
K8	-	XC6225B16ANR-G	LVR-IC	LDO, 1.65V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
K9	-	AP8821N-29GI	Vdet-IC	2.9V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
K9	-	AP8821N-29GS	Vdet-IC	2.9V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
K9	-	AP8821N-29PI	Vdet-IC	2.9V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
K9	-	AP8821N-29PS	Vdet-IC	2.9V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
K9	-	R3111Q091A	Vdet-IC	0.9V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
K9	-	RP103Q291D5	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
K9	-	XC61CN0902N	Vdet-IC	0.9V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
K9	-	XC6223E191NR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
K9	-	XC6225B172NR-G	LVR-IC	LDO, 1.7V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
ka	-	PT7M6220NLC4	Vdet-IC	2.0V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
ka	gb	PT7M6220NLC4E	Vdet-IC	2.0V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
Ka	-	FP6811-23NC4P	Vdet-IC	2.32V±1.5%, -Reset ODO, -MR	SC-70-4	23vdh	VD5	5b	Fit
KA	-	BU4917F	Vdet-IC	1.7V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KA	-	R1114Q201A	LVR-IC	LDO, Low noise, 2.0V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
KA	-	RP130Q501B	LVR-IC	LDO, LN, +CE, 5V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
KA	-	XC6120C10N	Vdet-IC	1V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KA	-	XC6127C16CNR	Vdet-IC	1.6V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KA	-	XC6127N16HNR	Vdet-IC	1.6V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
KA	-	XC6223E201NR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
KAAP	-	MAX6335US16D3	Vdet-IC	1.6V±1.5%, -MR, +Reset PPO Voltage Detector	SOT-143	24vdh	VD5	5c	Max
KAAQ	-	MAX6335US18D3	Vdet-IC	1.8V±1.5%, -MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Max
KAAR	-	MAX6335US22D3	Vdet-IC	2.2V±1.5%, -MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Max
KAAS	-	MAX6336US16D3	Vdet-IC	1.6V±1.5%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Max
KAAT	-	MAX6336US18D3	Vdet-IC	1.8V±1.5%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Max
KAAU	-	MAX6336US20D3	Vdet-IC	2.0V±1.5%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Max
KAAV	-	MAX6336US22D3	Vdet-IC	2.2V±1.5%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Max
KAAW	-	MAX6336US23D3	Vdet-IC	2.3V±1.5%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Max
KAAX	-	MAX6337US16D3	Vdet-IC	1.6V±1.5%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Max
KAAY	-	MAX6337US18D3	Vdet-IC	1.8V±1.5%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Max
KAAZ	-	MAX6337US22D3	Vdet-IC	2.2V±1.5%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Max
KABP	-	MAX6335US20D3	Vdet-IC	2.0V±1.5%, -MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Max
KABQ	-	MAX6335US23D3	Vdet-IC	2.3V±1.5%, -MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Max
KABR	-	MAX6337US20D3	Vdet-IC	2.0V±1.5%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Max
KABS	-	MAX6337US23D3	Vdet-IC	2.3V±1.5%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Max
KABT	-	MAX6806US46-T	Vdet-IC	4.6V±1.5%, -MR, -Reset PPO	SOT-143	24co	VD5	5c	Max
KABU	-	MAX6806US26-T	Vdet-IC	2.6V±1.5%, -MR, -Reset PPO	SOT-143	24co	VD5	5c	Max
KABV	-	MAX6806US23-T	Vdet-IC	2.3V±1.5%, -MR, -Reset PPO	SOT-143	24co	VD5	5c	Max

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KABW	-	MAX6807US46-T	Vdet-IC	4.6V±1.5%, -MR, +Reset PPO	SOT-143	24co	VD5	5c	Max
KABX	-	MAX6807US26-T	Vdet-IC	2.6V±1.5%, -MR, +Reset PPO	SOT-143	24co	VD5	5c	Max
KABY	-	MAX6808US46-T	Vdet-IC	4.6V±1.5%, -MR, -Reset ODO	SOT-143	24co	VD4	5c	Max
KABZ	-	MAX6808US26-T	Vdet-IC	2.6V±1.5%, -MR, -Reset ODO	SOT-143	24co	VD4	5c	Max
KACC	-	MAX6808US32-T	Vdet-IC	3.2V±1.5%, -MR, -Reset ODO	SOT-143	24co	VD4	5c	Max
KAEW	-	MAX6468US29D3	Vdet-IC	2.9V±1.5%, -MR, Reset PPO	SOT-143R	26vdh	VD5	5c	Max
KAFK	-	MAX6443US29L	Vdet-IC	2.9V±1.5%, ±MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Max
KAFL	-	MAX6444US46L	Vdet-IC	4.6V±1.5%, ±MR, -Reset ODO	SOT-143	24vdh	VD5	5c	Max
KAFN	-	MAX6467US16D3	Vdet-IC	1.6V±1.5%, -MR, Reset ODO	SOT-143R	26vdh	VD4	5c	Max
KAFO	-	MAX6467US22D3	Vdet-IC	2.2V±1.5%, -MR, Reset ODO	SOT-143R	26vdh	VD4	5c	Max
KAFP	-	MAX6467US26D3	Vdet-IC	2.6V±1.5%, -MR, Reset ODO	SOT-143R	26vdh	VD4	5c	Max
KAFQ	-	MAX6467US29D3	Vdet-IC	2.9V±1.5%, -MR, Reset ODO	SOT-143R	26vdh	VD4	5c	Max
KAFR	-	MAX6467US46D3	Vdet-IC	4.6V±1.5%, -MR, Reset ODO	SOT-143R	26vdh	VD4	5c	Max
KAFS	-	MAX6468US16D3	Vdet-IC	1.6V±1.5%, -MR, Reset PPO	SOT-143R	26vdh	VD5	5c	Max
KAFT	-	MAX6468US22D3	Vdet-IC	2.2V±1.5%, -MR, Reset PPO	SOT-143R	26vdh	VD5	5c	Max
KAFU	-	MAX6468US26D3	Vdet-IC	2.6V±1.5%, -MR, Reset PPO	SOT-143R	26vdh	VD5	5c	Max
KAFV	-	MAX6468US46D3	Vdet-IC	4.6V±1.5%, -MR, Reset PPO	SOT-143R	26vdh	VD5	5c	Max
KAFW	-	MAX6443US16L	Vdet-IC	1.6V±1.5%, ±MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Max
KAFX	-	MAX6443US23L	Vdet-IC	2.3V±1.5%, ±MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Max
KAFY	-	MAX6443US26L	Vdet-IC	2.6V±1.5%, ±MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Max
KAFZ	-	MAX6443US46L	Vdet-IC	4.6V±1.5%, ±MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Max
KAGA	-	MAX6444US16L	Vdet-IC	1.6V±1.5%, ±MR, -Reset ODO	SOT-143	24vdh	VD5	5c	Max
KAGB	-	MAX6444US23L	Vdet-IC	2.3V±1.5%, ±MR, -Reset ODO	SOT-143	24vdh	VD5	5c	Max
KAGC	-	MAX6444US26L	Vdet-IC	2.6V±1.5%, ±MR, -Reset ODO	SOT-143	24vdh	VD5	5c	Max
KAGD	-	MAX6444US29L	Vdet-IC	2.9V±1.5%, ±MR, -Reset ODO	SOT-143	24vdh	VD5	5c	Max
KAGG	-	MAX6394-US45D3	Vdet-IC	4.5V±1%, -MR. -Reset ODO	SOT-143	24vdh	VD4	5c	Max
KAHA	-	MAX6394-US455D3	Vdet-IC	4.45V±1%, -MR. -Reset ODO, Td=200ms	SOT-143	24vdh	VD4	5c	Max
KAHB	-	MAX6394-US310D3	Vdet-IC	3.1V±1%, -MR. -Reset ODO, Td=200ms	SOT-143	24vdh	VD4	5c	Max
KAHC	-	MAX6394-US240D3	Vdet-IC	2.4V±1%, -MR. -Reset ODO, Td=200ms	SOT-143	24vdh	VD4	5c	Max
KAHD	-	MAX6394-US480D3	Vdet-IC	4.8V±1%, -MR. -Reset ODO, Td=200ms	SOT-143	24vdh	VD4	5c	Max
KAHE	-	MAX6394-US240D1	Vdet-IC	2.4V±1%, -MR. -Reset ODO, Td=1.4ms	SOT-143	24vdh	VD4	5c	Max
KAHF	-	MAX6394-US240D2	Vdet-IC	2.4V±1%, -MR. -Reset ODO, Td=28ms	SOT-143	24vdh	VD4	5c	Max
KAHG	-	MAX6394-US240D4	Vdet-IC	2.4V±1%, -MR. -Reset ODO, Td=1570ms	SOT-143	24vdh	VD4	5c	Max
KAHH	-	MAX6394-US294D1	Vdet-IC	2.9V±1%, -MR. -Reset ODO, Td=1.4ms	SOT-143	24vdh	VD4	5c	Max
KAHI	-	MAX6394-US294D2	Vdet-IC	2.9V±1%, -MR. -Reset ODO, Td=28ms	SOT-143	24vdh	VD4	5c	Max
KAHJ	-	MAX6394-US294D3	Vdet-IC	2.9V±1%, -MR. -Reset ODO, Td=200ms	SOT-143	24vdh	VD4	5c	Max
KAHK	-	MAX6394-US294D4	Vdet-IC	2.9V±1%, -MR. -Reset ODO, Td=1570ms	SOT-143	24vdh	VD4	5c	Max
KAHL	-	MAX6394-US300D1	Vdet-IC	3.0V±1%, -MR. -Reset ODO, Td=1.4ms	SOT-143	24vdh	VD4	5c	Max
KAHM	-	MAX6394-US300D2	Vdet-IC	3.0V±1%, -MR. -Reset ODO, Td=28ms	SOT-143	24vdh	VD4	5c	Max
KAHN	-	MAX6394-US300D3	Vdet-IC	3.0V±1%, -MR. -Reset ODO, Td=200ms	SOT-143	24vdh	VD4	5c	Max
KAHO	-	MAX6394-US300D4	Vdet-IC	3.0V±1%, -MR. -Reset ODO, Td=1570ms	SOT-143	24vdh	VD4	5c	Max
KAHP	-	MAX6394-US310D1	Vdet-IC	3.1V±1%, -MR. -Reset ODO, Td=1.4ms	SOT-143	24vdh	VD4	5c	Max
KAHQ	-	MAX6394-US310D2	Vdet-IC	3.1V±1%, -MR. -Reset ODO, Td=28ms	SOT-143	24vdh	VD4	5c	Max
KAHR	-	MAX6394-US310D4	Vdet-IC	3.1V±1%, -MR. -Reset ODO, Td=1570ms	SOT-143	24vdh	VD4	5c	Max
KAHS	-	MAX6394-US317D1	Vdet-IC	3.17V±1%, -MR. -Reset ODO, Td=1.4ms	SOT-143	24vdh	VD4	5c	Max
KAHT	-	MAX6394-US317D2	Vdet-IC	3.17V±1%, -MR. -Reset ODO, Td=28ms	SOT-143	24vdh	VD4	5c	Max
KAHU	-	MAX6394-US317D3	Vdet-IC	3.17V±1%, -MR. -Reset ODO, Td=200ms	SOT-143	24vdh	VD4	5c	Max
KAHV	-	MAX6394-US317D4	Vdet-IC	3.17V±1%, -MR. -Reset ODO, Td=1570ms	SOT-143	24vdh	VD4	5c	Max
KAHW	-	MAX6394-US445D1	Vdet-IC	4.45V±1%, -MR. -Reset ODO, Td=1.4ms	SOT-143	24vdh	VD4	5c	Max
KAHX	-	MAX6394-US445D2	Vdet-IC	4.45V±1%, -MR. -Reset ODO, Td=28ms	SOT-143	24vdh	VD4	5c	Max
KAHY	-	MAX6394-US445D3	Vdet-IC	4.45V±1%, -MR. -Reset ODO, Td=200ms	SOT-143	24vdh	VD4	5c	Max
KAHZ	-	MAX6394-US445D4	Vdet-IC	4.45V±1%, -MR. -Reset ODO, Td=1570ms	SOT-143	24vdh	VD4	5c	Max
KAIA	-	MAX6394-US455D1	Vdet-IC	4.45V±1%, -MR. -Reset ODO, Td=1.4ms	SOT-143	24vdh	VD4	5c	Max
KAIB	-	MAX6394-US455D2	Vdet-IC	4.45V±1%, -MR. -Reset ODO, Td=28ms	SOT-143	24vdh	VD4	5c	Max
KAIC	-	MAX6394-US455D4	Vdet-IC	4.45V±1%, -MR. -Reset ODO, Td=1570ms	SOT-143	24vdh	VD4	5c	Max
KAID	-	MAX6394-US470D1	Vdet-IC	4.7V±1%, -MR. -Reset ODO, Td=1.4ms	SOT-143	24vdh	VD4	5c	Max
KAIE	-	MAX6394-US470D2	Vdet-IC	4.7V±1%, -MR. -Reset ODO, Td=28ms	SOT-143	24vdh	VD4	5c	Max
KAIF	-	MAX6394-US470D3	Vdet-IC	4.7V±1%, -MR. -Reset ODO, Td=200ms	SOT-143	24vdh	VD4	5c	Max
KAIG	-	MAX6394-US470D4	Vdet-IC	4.7V±1%, -MR. -Reset ODO, Td=1570ms	SOT-143	24vdh	VD4	5c	Max
KAIH	-	MAX6394-US480D1	Vdet-IC	4.8V±1%, -MR. -Reset ODO, Td=1.4ms	SOT-143	24vdh	VD4	5c	Max
KAII	-	MAX6394-US480D2	Vdet-IC	4.8V±1%, -MR. -Reset ODO, Td=28ms	SOT-143	24vdh	VD4	5c	Max
KAIJ	-	MAX6394-US480D4	Vdet-IC	4.8V±1%, -MR. -Reset ODO, Td=1570ms	SOT-143	24vdh	VD4	5c	Max
kb	-	PT7M6221CLC4	Vdet-IC	2.1V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
kb	gb	PT7M6221CLC4E	Vdet-IC	2.1V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
Kb	-	FP6811-26NC4P	Vdet-IC	2.63V±1.5%, -Reset ODO, -MR	SC-70-4	23vdh	VD5	5b	Fit
KB	-	BU4918F	Vdet-IC	1.8V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KB	-	R1114Q211A	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
KB	-	XC6120C11N	Vdet-IC	1.1V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KB	-	XC6127C18CNR	Vdet-IC	1.8V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KB	-	XC6127N18HNR	Vdet-IC	1.8V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KB	-	XC6223E211NR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
kc	-	PT7M6221CHC4	Vdet-IC	2.1V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
kc	gb	PT7M6221CHC4E	Vdet-IC	2.1V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
KC	-	BU4919F	Vdet-IC	1.9V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KC	-	R1114Q221A	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
KC	-	XC6120C12N	Vdet-IC	1.2V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KC	-	XC6127C20CNR	Vdet-IC	2.0V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KC	-	XC6127N20HNR	Vdet-IC	2.0V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
KC	-	XC6223E221NR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
kd	-	PT7M6221NLC4	Vdet-IC	2.1V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
kd	gb	PT7M6221NLC4E	Vdet-IC	2.1V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
Kd	-	FP6811-29NC4P	Vdet-IC	2.93V±1.5%, -Reset ODO, -MR	SC-70-4	23vdh	VD5	5b	Fit
KD	-	BU4920F	Vdet-IC	2.0V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KD	-	R1114Q231A	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
KD	-	XC6120C13N	Vdet-IC	1.3V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KD	-	XC6127C22CNR	Vdet-IC	2.2V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KD	-	XC6127N22HNR	Vdet-IC	2.2V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
KD	-	XC6223E231NR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
ke	-	PT7M6222CLC4	Vdet-IC	2.2V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
ke	gb	PT7M6222CLC4E	Vdet-IC	2.2V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
Ke	-	FP6811-31NC4P	Vdet-IC	3.08V±1.5%, -Reset ODO, -MR	SC-70-4	23vdh	VD5	5b	Fit
KE	-	BU4921F	Vdet-IC	2.1V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KE	-	R1114Q241A	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
KE	-	XC6120C14N	Vdet-IC	1.4V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KE	-	XC6127C24CNR	Vdet-IC	2.4V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KE	-	XC6127N24HNR	Vdet-IC	2.4V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
KE	-	XC6223E241NR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
kf	-	PT7M6222CHC4	Vdet-IC	2.2V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
kf	gb	PT7M6222CHC4E	Vdet-IC	2.2V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
Kf	-	FP6811-40NC4P	Vdet-IC	4.0V±1.5%, -Reset ODO, -MR	SC-70-4	23vdh	VD5	5b	Fit
KF	-	BU4922F	Vdet-IC	2.2V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KF	-	R1114Q251A	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
KF	-	XC6120C15N	Vdet-IC	1.5V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KF	-	XC6127C26CNR	Vdet-IC	2.6V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KF	-	XC6127N26HNR	Vdet-IC	2.6V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
KF	-	XC6223E251NR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
kg	-	PT7M6222NLC4	Vdet-IC	2.2V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
kg	gb	PT7M6222NLC4E	Vdet-IC	2.2V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
KG	-	BU4923F	Vdet-IC	2.3V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KG	-	R1114Q261A	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
kh	-	PT7M6223CLC4	Vdet-IC	2.3V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
kh	gb	PT7M6223CLC4E	Vdet-IC	2.3V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
Kh	-	FP6811-44NC4P	Vdet-IC	4.38V±1.5%, -Reset ODO, -MR	SC-70-4	23vdh	VD5	5b	Fit
KH	-	BU4924F	Vdet-IC	2.4V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KH	-	R1114Q271A	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
KH	-	XC6120C16N	Vdet-IC	1.6V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KH	-	XC6127C28CNR	Vdet-IC	2.8V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KH	-	XC6127N28HNR	Vdet-IC	2.8V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
KH	-	XC6223E261NR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
ki	-	PT7M6223CHC4	Vdet-IC	2.3V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
ki	gb	PT7M6223CHC4E	Vdet-IC	2.3V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
Ki	-	FP6811-46NC4P	Vdet-IC	4.63V±1.5%, -Reset ODO, -MR	SC-70-4	23vdh	VD5	5b	Fit
kj	-	PT7M6223NLC4	Vdet-IC	2.3V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
kj	gb	PT7M6223NLC4E	Vdet-IC	2.3V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
KJ	-	BU4925F	Vdet-IC	2.5V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KJ	-	ETC811JU	Vdet-IC	4.0V±2%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Etc
KJ	-	FM811JUX	Vdet-IC	4.0V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	F
KJ	-	MIC811JU	Vdet-IC	4.0V±1%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Mcr
KJ	-	R1114Q281A	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
KJ	gk	MIC811JUY	Vdet-IC	4.0V±1%, -MR, -Reset PPO, Pb-free	SOT-143	24vdh	VD5	5c	Mcr
kk	-	PT7M6224CLC4	Vdet-IC	2.4V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
kk	gb	PT7M6224CLC4E	Vdet-IC	2.4V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
KK	-	BU4926F	Vdet-IC	2.6V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KK	-	R1114Q291A	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
KK	-	XC6120C17N	Vdet-IC	1.7V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KK	-	XC6127C30CNR	Vdet-IC	3.0V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KK	-	XC6127N30HNR	Vdet-IC	3.0V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
KK	-	XC6223E271NR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
kl	-	PT7M6224CHC4	Vdet-IC	2.4V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
kl	gb	PT7M6224CHC4E	Vdet-IC	2.4V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KL	-	BU4927F	Vdet-IC	2.7V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KL	-	ETC811LU	Vdet-IC	4.63V±2%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Etc
KL	-	FM811LUX	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	F
KL	-	MIC811LU	Vdet-IC	4.63V±1%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Mcr
KL	-	XC6120C18N	Vdet-IC	1.8V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KL	-	XC6127C32CNR	Vdet-IC	3.2V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KL	-	XC6127N32HNR	Vdet-IC	3.2V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
KL	-	XC6223E281NR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
KL	gk	MIC811LUY	Vdet-IC	4.63V±1%, -MR, -Reset PPO, Pb-free	SOT-143	24vdh	VD5	5c	Mcr
km	-	PT7M6224NLC4	Vdet-IC	2.4V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
km	gb	PT7M6224NLC4E	Vdet-IC	2.4V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
Km	-	FP6811-23CC4P	Vdet-IC	2.32V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD6	5b	Fit
KM	-	BU4928F	Vdet-IC	2.8V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KM	-	ETC811MU	Vdet-IC	4.38V±2%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Etc
KM	-	FM811MUX	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	F
KM	-	MIC811MU	Vdet-IC	4.38V±1%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Mcr
KM	-	XC6120C19N	Vdet-IC	1.9V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KM	-	XC6127C34CNR	Vdet-IC	3.4V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KM	-	XC6127N34HNR	Vdet-IC	3.4V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
KM	-	XC6223E291NR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
KM	gk	MIC811MUY	Vdet-IC	4.38V±1%, -MR, -Reset PPO, Pb-free	SOT-143	24vdh	VD5	5c	Mcr
kn	-	PT7M6225CLC4	Vdet-IC	2.5V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
kn	gb	PT7M6225CLC4E	Vdet-IC	2.5V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
Kn	-	FP6811-26CC4P	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD6	5b	Fit
KN	-	BU4929F	Vdet-IC	2.9V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KN	-	XC6119N10ANR	Vdet-IC	1.0V±30mV, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
KN	-	XC6120C20N	Vdet-IC	2V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KN	-	XC6127C36CNR	Vdet-IC	3.6V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KN	-	XC6127N36HNR	Vdet-IC	3.6V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
ko	-	PT7M6225CHC4	Vdet-IC	2.5V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
ko	gb	PT7M6225CHC4E	Vdet-IC	2.5V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
kp	-	PT7M6225NLC4	Vdet-IC	2.5V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
kp	gb	PT7M6225NLC4E	Vdet-IC	2.5V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
KP	-	BU4930F	Vdet-IC	3.0V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KP	-	XC6119N11ANR	Vdet-IC	1.1V±30mV, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
KP	-	XC6120C21N	Vdet-IC	2.1V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KP	-	XC6127C38CNR	Vdet-IC	3.8V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KP	-	XC6127N38HNR	Vdet-IC	3.8V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
kq	-	PT7M6226CLC4	Vdet-IC	2.6V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
kq	gb	PT7M6226CLC4E	Vdet-IC	2.6V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
KQ	-	BU4931F	Vdet-IC	3.1V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
kr	-	PT7M6226CHC4	Vdet-IC	2.6V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
kr	gb	PT7M6226CHC4E	Vdet-IC	2.6V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
Kr	-	FP6811-29CC4P	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD6	5b	Fit
KR	-	BU4932F	Vdet-IC	3.2V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KR	-	ETC811RU	Vdet-IC	2.63V±2%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Etc
KR	-	FM811RUX	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	F
KR	-	MIC811RU	Vdet-IC	2.63V±1%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Mcr
KR	-	XC6119N12ANR	Vdet-IC	1.2V±30mV, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
KR	-	XC6120C22N	Vdet-IC	2.2V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KR	-	XC6127C40CNR	Vdet-IC	4.0V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KR	-	XC6127N40HNR	Vdet-IC	4.0V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
KR	gk	MIC811RUY	Vdet-IC	2.63V±1%, -MR, -Reset PPO, Pb-free	SOT-143	24vdh	VD5	5c	Mcr
ks	-	PT7M6226NLC4	Vdet-IC	2.6V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
ks	gb	PT7M6226NLC4E	Vdet-IC	2.6V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
Ks	-	FP6811-31CC4P	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD6	5b	Fit
KS	-	BU4933F	Vdet-IC	3.3V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KS	-	ETC811SU	Vdet-IC	2.93V±2%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Etc
KS	-	FM811SUX	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	F
KS	-	MIC811SU	Vdet-IC	2.93V±1%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Mcr
KS	-	XC6119N13ANR	Vdet-IC	1.3V±30mV, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
KS	-	XC6120C23N	Vdet-IC	2.3V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KS	-	XC6127C42CNR	Vdet-IC	4.2V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KS	-	XC6127N42HNR	Vdet-IC	4.2V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
KS	gk	MIC811SUY	Vdet-IC	2.93V±1%, -MR, -Reset PPO, Pb-free	SOT-143	24vdh	VD5	5c	Mcr
kt	-	PT7M6227CLC4	Vdet-IC	2.7V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
kt	gb	PT7M6227CLC4E	Vdet-IC	2.7V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
Kt	-	FP6811-40CC4P	Vdet-IC	4.0V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD6	5b	Fit
KT	-	BU4934F	Vdet-IC	3.4V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KT	-	ETC811TU	Vdet-IC	3.08V±2%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Etc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KT	-	FM811TUX	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	F
KT	-	MIC811TU	Vdet-IC	3.08V±1%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Mcr
KT	-	XC6119N14ANR	Vdet-IC	1.4V±30mV, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
KT	-	XC6120C24N	Vdet-IC	2.4V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KT	-	XC6127C44CNR	Vdet-IC	4.4V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KT	-	XC6127N44HNR	Vdet-IC	4.4V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
KT	gk	MIC811TUY	Vdet-IC	3.08V±1%, -MR, -Reset PPO, Pb-free	SOT-143	24vdh	VD5	5c	Mcr
ku	-	PT7M6227CHC4	Vdet-IC	2.7V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
ku	gb	PT7M6227CHC4E	Vdet-IC	2.7V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
Ku	-	FP6811-44CC4P	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD6	5b	Fit
KU	-	BU4935F	Vdet-IC	3.5V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KU	-	XC6119N15ANR	Vdet-IC	1.5V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
KU	-	XC6120C25N	Vdet-IC	2.5V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KU	-	XC6127C46CNR	Vdet-IC	4.6V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KU	-	XC6127N46HNR	Vdet-IC	4.6V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
kv	-	PT7M6227NLC4	Vdet-IC	2.7V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
kv	gb	PT7M6227NLC4E	Vdet-IC	2.7V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
Kv	-	FP6811-46CC4P	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR	SC-70-4	23vdh	VD6	5b	Fit
KV	-	BU4936F	Vdet-IC	3.6V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KV	-	XC6119N16ANR	Vdet-IC	1.6V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
KV	-	XC6120C26N	Vdet-IC	2.6V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KV	-	XC6127C48CNR	Vdet-IC	4.8V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KV	-	XC6127N48HNR	Vdet-IC	4.8V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
kw	-	PT7M6228CLC4	Vdet-IC	2.8V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
kw	gb	PT7M6228CLC4E	Vdet-IC	2.8V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
KW	-	BU4937F	Vdet-IC	3.7V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
kx	-	PT7M6228CHC4	Vdet-IC	2.8V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
kx	gb	PT7M6228CHC4E	Vdet-IC	2.8V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
KX	-	BU4938F	Vdet-IC	3.8V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KX	-	XC6119N17ANR	Vdet-IC	1.7V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
KX	-	XC6120C27N	Vdet-IC	2.7V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KX	-	XC6127C50CNR	Vdet-IC	5.0V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KX	-	XC6127N50HNR	Vdet-IC	5.0V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
ky	-	PT7M6228NLC4	Vdet-IC	2.8V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
ky	gb	PT7M6228NLC4E	Vdet-IC	2.8V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
KY	-	BU4939F	Vdet-IC	3.9V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KY	-	XC6109N08AN	Vdet-IC	0.8V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
KY	-	XC6119N18ANR	Vdet-IC	1.8V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
KY	-	XC6120C28N	Vdet-IC	2.8V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KY	-	XC6127C52CNR	Vdet-IC	5.2V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KY	-	XC6127N52HNR	Vdet-IC	5.2V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
kz	-	PT7M6229CLC4	Vdet-IC	2.9V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
kz	gb	PT7M6229CLC4E	Vdet-IC	2.9V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
KZ	-	BU4940F	Vdet-IC	4.0V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
KZ	-	XC6109N09AN	Vdet-IC	0.9V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
KZ	-	XC6119N19ANR	Vdet-IC	1.9V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
KZ	-	XC6120C29N	Vdet-IC	2.9V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
KZ	-	XC6127C54CNR	Vdet-IC	5.4V±0.8%, -Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
KZ	-	XC6127N54HNR	Vdet-IC	5.4V±0.8%, +Reset ODO, -MR, Rt=200ms	SSOT-24	26cr	VD4	5k	Tor
L	gc	ELM7532NCB	Vdet-IC	3.2V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
L	gd	ELM7532CCB	Vdet-IC	3.2V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
L0	-	AP8821N-30GI	Vdet-IC	3.0V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
L0	-	AP8821N-30GS	Vdet-IC	3.0V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
L0	-	AP8821N-30PI	Vdet-IC	3.0V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
L0	-	AP8821N-30PS	Vdet-IC	3.0V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
L0	-	R3111Q101A	Vdet-IC	1V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
L0	-	R3116Q071A	Vdet-IC	0.7V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
L0	-	RP104Q121B	LVR-IC	LDO, 1.2V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
L0	-	XC6120C30N	Vdet-IC	3V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
L0	-	XC61CN1002N	Vdet-IC	1.0V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
L1	-	AP8821N-31GI	Vdet-IC	3.1V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
L1	-	AP8821N-31GS	Vdet-IC	3.1V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
L1	-	AP8821N-31PI	Vdet-IC	3.1V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
L1	-	AP8821N-31PS	Vdet-IC	3.1V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
L1	-	R3111Q111A	Vdet-IC	1.1V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
L1	-	R3116Q081A	Vdet-IC	0.8V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
L1	-	RP104Q131B	LVR-IC	LDO, 1.3V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
L1	-	XC6120C31N	Vdet-IC	3.1V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
L1	-	XC61CN1102N	Vdet-IC	1.1V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
L2	-	AP8821N-32GI	Vdet-IC	3.2V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L2	-	AP8821N-32GS	Vdet-IC	3.2V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
L2	-	AP8821N-32PI	Vdet-IC	3.2V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
L2	-	AP8821N-32PS	Vdet-IC	3.2V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
L2	-	R3111Q121A	Vdet-IC	1.2V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
L2	-	R3116Q091A	Vdet-IC	0.9V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
L2	-	RP104Q151B	LVR-IC	LDO, 1.5V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
L2	-	XC6120C32N	Vdet-IC	3.2V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
L2	-	XC61CN1202N	Vdet-IC	1.2V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
L2	-	XC6223F121NR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
L3	-	AP8821N-33GI	Vdet-IC	3.3V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
L3	-	AP8821N-33GS	Vdet-IC	3.3V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
L3	-	AP8821N-33PI	Vdet-IC	3.3V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
L3	-	AP8821N-33PS	Vdet-IC	3.3V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
L3	-	R3111Q131A	Vdet-IC	1.3V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
L3	-	R3116Q101A	Vdet-IC	1V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
L3	-	RP104Q181B	LVR-IC	LDO, 1.8V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
L3	-	XC6120C33N	Vdet-IC	3.3V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
L3	-	XC61CN1302N	Vdet-IC	1.3V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
L3	-	XC6223F131NR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
L30	-	BAV23	Si-diode	Dual, GP, 200V, 225mA, Vs<1.25V(200mA), <50ns	SOT-143	24ce	-	5c	Phi
L4	-	AP8821N-34GI	Vdet-IC	3.4V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
L4	-	AP8821N-34GS	Vdet-IC	3.4V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
L4	-	AP8821N-34PI	Vdet-IC	3.4V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
L4	-	AP8821N-34PS	Vdet-IC	3.4V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
L4	-	R3111Q141A	Vdet-IC	1.4V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
L4	-	R3116Q111A	Vdet-IC	1.1V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
L4	-	RP104Q181B5	LVR-IC	LDO, 1.85V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
L4	-	XC6120C34N	Vdet-IC	3.4V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
L4	-	XC61CN1402N	Vdet-IC	1.4V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
L4	-	XC6223F141NR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
L41	-	BAT74	Si-diode	Dual, Sw, 30V, 200mA, 230mW, Vf<0.8V(0.1A), <5ns	SOT-143B	24ce	-	5c	Phi
L5	-	AP8821N-35GI	Vdet-IC	3.5V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
L5	-	AP8821N-35GS	Vdet-IC	3.5V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
L5	-	AP8821N-35PI	Vdet-IC	3.5V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
L5	-	AP8821N-35PS	Vdet-IC	3.5V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
L5	-	R3111Q151A	Vdet-IC	1.5V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
L5	-	R3116Q121A	Vdet-IC	1.2V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
L5	-	RP104Q191B	LVR-IC	LDO, 1.9V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
L5	-	XC6120C35N	Vdet-IC	3.5V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
L5	-	XC61CN1502N	Vdet-IC	1.5V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
L5	-	XC6223F151NR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
L51	-	BAS56	Si-diode	Dual, Sw, Ultra-fast, 60V, 200mA, 250mW, <6ns	SOT-143	24ce	-	5c	Phi
L6	-	AP8821N-36GI	Vdet-IC	3.6V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
L6	-	AP8821N-36GS	Vdet-IC	3.6V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
L6	-	AP8821N-36PI	Vdet-IC	3.6V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
L6	-	AP8821N-36PS	Vdet-IC	3.6V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
L6	-	R3111Q161A	Vdet-IC	1.6V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
L6	-	R3116Q131A	Vdet-IC	1.3V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
L6	-	RP104Q201B	LVR-IC	LDO, 2.0V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
L6	-	XC6120C36N	Vdet-IC	3.6V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
L6	-	XC61CN1602N	Vdet-IC	1.6V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
L6	-	XC6223F161NR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
L7	-	AP8821N-37GI	Vdet-IC	3.7V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
L7	-	AP8821N-37GS	Vdet-IC	3.7V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
L7	-	AP8821N-37PI	Vdet-IC	3.7V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
L7	-	AP8821N-37PS	Vdet-IC	3.7V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
L7	-	R3111Q171A	Vdet-IC	1.7V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
L7	-	R3116Q141A	Vdet-IC	1.4V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
L7	-	RP104Q251B	LVR-IC	LDO, 2.5V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
L7	-	XC6120C37N	Vdet-IC	3.7V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
L7	-	XC61CN1702N	Vdet-IC	1.7V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
L7	-	XC6223F171NR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
L8	-	AP8821N-38GI	Vdet-IC	3.8V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
L8	-	AP8821N-38GS	Vdet-IC	3.8V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
L8	-	AP8821N-38PI	Vdet-IC	3.8V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
L8	-	AP8821N-38PS	Vdet-IC	3.8V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
L8	-	R3111Q181A	Vdet-IC	1.8V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
L8	-	R3116Q151A	Vdet-IC	1.5V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
L8	-	RP104Q261B	LVR-IC	LDO, 2.6V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
L8	-	XC6120C38N	Vdet-IC	3.8V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L8	-	XC61CN1802N	Vdet-IC	1.8V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
L8	-	XC6223F181NR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
L9	-	AP8821N-39GI	Vdet-IC	3.9V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
L9	-	AP8821N-39GS	Vdet-IC	3.9V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
L9	-	AP8821N-39PI	Vdet-IC	3.9V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
L9	-	AP8821N-39PS	Vdet-IC	3.9V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
L9	-	R3111Q191A	Vdet-IC	1.9V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
L9	-	R3116Q161A	Vdet-IC	1.6V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
L9	-	RP104Q271B	LVR-IC	LDO, 2.7V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
L9	-	XC6120C39N	Vdet-IC	3.9V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
L9	-	XC61CN1902N	Vdet-IC	1.9V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
L9	-	XC6223F191NR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
la	-	PT7M6229CHC4	Vdet-IC	2.9V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
la	gb	PT7M6229CHC4E	Vdet-IC	2.9V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
LA	-	BF1201WR	n-MOSFET	Dual gate, VHF, UHF, 10V, 30mA, 200mW, 35ms	SOT-343R	26fm	-	5c	Phi
LA	-	BU4941F	Vdet-IC	4.1V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
LA	-	R1114Q301A	LVR-IC	LDO, Low noise, 3.0V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
LA	-	RP130Q121D	LVR-IC	LDO, LN, +CE, CL, 1.2V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
LA	-	XC6120C40N	Vdet-IC	4V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
LA	-	XC6127N16JNR	Vdet-IC	1.6V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LA	-	XC6223F201NR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
LA26	-	MIC5203-2.6BM4	LVR-IC	LDO, 2.6V±1%, 80mA, +CE	SOT-143	24uc	VR4	5c	Mcr
LA26	ge	MIC5203-2.6YM4	LVR-IC	LDO, 2.6V±1%, 80mA, +CE, Pb. Free	SOT-143	24uc	VR4	5c	Mcr
LA28	-	MIC5203-2.8BM4	LVR-IC	LDO, 2.8V±1%, 80mA, +CE	SOT-143	24uc	VR4	5c	Mcr
LA28	ge	MIC5203-2.8YM4	LVR-IC	LDO, 2.8V±1%, 80mA, +CE, Pb. Free	SOT-143	24uc	VR4	5c	Mcr
LA30	-	MIC5203-3.0BM4	LVR-IC	LDO, 3V±1%, 80mA, +CE	SOT-143	24uc	VR4	5c	Mcr
LA30	ge	MIC5203-3.0YM4	LVR-IC	LDO, 3V±1%, 80mA, +CE, Pb. Free	SOT-143	24uc	VR4	5c	Mcr
LA33	-	MIC5203-3.3BM4	LVR-IC	LDO, 3.3V±1%, 80mA, +CE	SOT-143	24uc	VR4	5c	Mcr
LA33	ge	MIC5203-3.3YM4	LVR-IC	LDO, 3.3V±1%, 80mA, +CE, Pb. Free	SOT-143	24uc	VR4	5c	Mcr
LA36	-	MIC5203-3.6BM4	LVR-IC	LDO, 3.6V±1%, 80mA, +CE	SOT-143	24uc	VR4	5c	Mcr
LA36	ge	MIC5203-3.6YM4	LVR-IC	LDO, 3.6V±1%, 80mA, +CE, Pb. Free	SOT-143	24uc	VR4	5c	Mcr
LA38	-	MIC5203-3.8BM4	LVR-IC	LDO, 3.8V±1%, 80mA, +CE	SOT-143	24uc	VR4	5c	Mcr
LA38	ge	MIC5203-3.8YM4	LVR-IC	LDO, 3.8V±1%, 80mA, +CE, Pb. Free	SOT-143	24uc	VR4	5c	Mcr
LA40	-	MIC5203-4.0BM4	LVR-IC	LDO, 4.0V±1%, 80mA, +CE	SOT-143	24uc	VR4	5c	Mcr
LA40	ge	MIC5203-4.0YM4	LVR-IC	LDO, 4.0V±1%, 80mA, +CE, Pb. Free	SOT-143	24uc	VR4	5c	Mcr
LA45	-	MIC5203-4.5BM4	LVR-IC	LDO, 4.5V±1%, 80mA, +CE	SOT-143	24uc	VR4	5c	Mcr
LA45	ge	MIC5203-4.5YM4	LVR-IC	LDO, 4.5V±1%, 80mA, +CE, Pb. Free	SOT-143	24uc	VR4	5c	Mcr
LA47	-	MIC5203-4.7BM4	LVR-IC	LDO, 4.7V±1%, 80mA, +CE	SOT-143	24uc	VR4	5c	Mcr
LA47	ge	MIC5203-4.7YM4	LVR-IC	LDO, 4.7V±1%, 80mA, +CE, Pb. Free	SOT-143	24uc	VR4	5c	Mcr
LA50	-	MIC5203-5.0BM4	LVR-IC	LDO, 5.0V±1%, 80mA, +CE	SOT-143	24uc	VR4	5c	Mcr
LA50	ge	MIC5203-5.0YM4	LVR-IC	LDO, 5.0V±1%, 80mA, +CE, Pb. Free	SOT-143	24uc	VR4	5c	Mcr
LAp	-	BF1201	n-MOSFET	Dual gate, VHF, UHF, 10V, 30mA, 200mW, 35ms	SOT-143	24fd	-	5c	Phi
LAW	-	NCP552SQ15T1	LVR-IC	Low Iq, +CE, 1.5V±2%, 80mA	SOT-143	26vp	VR4	5c	Ons
LAX	-	NCP552SQ18T1	LVR-IC	Low Iq, +CE, 1.8V±2%, 80mA	SOT-143	26vp	VR4	5c	Ons
LAY	-	NCP552SQ25T1	LVR-IC	Low Iq, +CE, 2.5V±2%, 80mA	SOT-143	26vp	VR4	5c	Ons
LAZ	-	NCP552SQ27T1	LVR-IC	Low Iq, +CE, 2.7V±2%, 80mA	SOT-143	26vp	VR4	5c	Ons
lb	-	PT7M6229NLC4	Vdet-IC	2.9V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
lb	gb	PT7M6229NLC4E	Vdet-IC	2.9V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
LB	-	BU4942F	Vdet-IC	4.2V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
LB	-	R1114Q311A	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
LB	-	RP130Q131D	LVR-IC	LDO, LN, +CE, CL, 1.3V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
LB	-	XC6120C41N	Vdet-IC	4.1V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
LB	-	XC6127N18JNR	Vdet-IC	1.8V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LB	-	XC6223F211NR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
LBA	-	NCP552SQ28T1	LVR-IC	Low Iq, +CE, 2.8V±2%, 80mA	SOT-143	26vp	VR4	5c	Ons
LBB	-	NCP552SQ30T1	LVR-IC	Low Iq, +CE, 3V±2%, 80mA	SOT-143	26vp	VR4	5c	Ons
LBC	-	NCP552SQ33T1	LVR-IC	Low Iq, +CE, 3.3V±2%, 80mA	SOT-143	26vp	VR4	5c	Ons
LBD	-	NCP552SQ50T1	LVR-IC	Low Iq, +CE, 5V±2%, 80mA	SOT-143	26vp	VR4	5c	Ons
LBE	-	NCP553SQ15T1	LVR-IC	Low Iq, 1.5V±2%, 80mA	SOT-143	26vs	VR1	5c	Ons
LBF	-	NCP553SQ18T1	LVR-IC	Low Iq, 1.8V±2%, 80mA	SOT-143	26vs	VR1	5c	Ons
LBG	-	NCP553SQ25T1	LVR-IC	Low Iq, 2.5V±2%, 80mA	SOT-143	26vs	VR1	5c	Ons
LBH	-	NCP553SQ27T1	LVR-IC	Low Iq, 2.7V±2%, 80mA	SOT-143	26vs	VR1	5c	Ons
LBI	-	NCP553SQ28T1	LVR-IC	Low Iq, 2.8V±2%, 80mA	SOT-143	26vs	VR1	5c	Ons
LBJ	-	NCP553SQ30T1	LVR-IC	Low Iq, 3V±2%, 80mA	SOT-143	26vs	VR1	5c	Ons
LBK	-	NCP553SQ33T1	LVR-IC	Low Iq, 3.3V±2%, 80mA	SOT-143	26vs	VR1	5c	Ons
LBL	-	NCP553SQ50T1	LVR-IC	Low Iq, 5V±2%, 80mA	SOT-143	26vs	VR1	5c	Ons
LBp	-	BF1201R	n-MOSFET	Dual gate, VHF, UHF, 10V, 30mA, 200mW, 35ms	SOT-143R	26fm	-	5c	Phi
lc	-	PT7M6230CLC4	Vdet-IC	3.0V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
lc	gb	PT7M6230CLC4E	Vdet-IC	3.0V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
LC	-	BU4943F	Vdet-IC	4.3V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LC	-	R1114Q321A	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
LC	-	RP130Q141D	LVR-IC	LDO, LN, +CE, CL, 1.4V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
LC	-	XC6120C42N	Vdet-IC	4.2V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
LC	-	XC6127N20JNR	Vdet-IC	2.0V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LC	-	XC6223F221NR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
ld	-	PT7M6230CHC4	Vdet-IC	3.0V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
ld	gb	PT7M6230CHC4E	Vdet-IC	3.0V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
LD	-	BU4944F	Vdet-IC	4.4V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
LD	-	R1114Q331A	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
LD	-	RP130Q151D	LVR-IC	LDO, LN, +CE, CL, 1.5V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
LD	-	XC6120C43N	Vdet-IC	4.3V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
LD	-	XC6127N22JNR	Vdet-IC	2.2V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LD	-	XC6223F231NR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
LD-	-	BF1202R	n-MOSFET	Dual gate, VHF, UHF, 10V, 30mA, 200mW, 30ms	SOT-143R	26fm	-	5c	NxH
LDI	-	NCP562SQ15T1	LVR-IC	LDO, Low Iq, +CE, 1.5V±2%, 80mA	SOT-143	26vp	VR4	5c	Ons
LDK	-	NCP562SQ25T1	LVR-IC	LDO, Low Iq, +CE, 2.5V±2%, 80mA	SOT-143	26vp	VR4	5c	Ons
LDL	-	NCP562SQ28T1	LVR-IC	LDO, Low Iq, +CE, 2.8V±2%, 80mA	SOT-143	26vp	VR4	5c	Ons
LDM	-	NCP562SQ30T1	LVR-IC	LDO, Low Iq, +CE, 3V±2%, 80mA	SOT-143	26vp	VR4	5c	Ons
LDN	-	NCP562SQ33T1	LVR-IC	LDO, Low Iq, +CE, 3.3V±2%, 80mA	SOT-143	26vp	VR4	5c	Ons
LDp	-	BF1202R	n-MOSFET	Dual gate, VHF, UHF, 10V, 30mA, 200mW, 30ms	SOT-143R	26fm	-	5c	NxH
LDp	-	BF1202R	n-MOSFET	Dual gate, VHF, UHF, 10V, 30mA, 200mW, 30ms	SOT-143R	26fm	-	5c	Phi
LDP	-	NCP562SQ50T1	LVR-IC	LDO, Low Iq, +CE, 5V±2%, 80mA	SOT-143	26vp	VR4	5c	Ons
LDQ	-	NCP563SQ15T1	LVR-IC	LDO, Low Iq, 1.5V±2%, 80mA	SOT-143	26vs	VR1	5c	Ons
LDS	-	NCP563SQ25T1	LVR-IC	LDO, Low Iq, 2.5V±2%, 80mA	SOT-143	26vs	VR1	5c	Ons
LDt	-	BF1202R	n-MOSFET	Dual gate, VHF, UHF, 10V, 30mA, 200mW, 30ms	SOT-143R	26fm	-	5c	NxM
LDT	-	NCP563SQ28T1	LVR-IC	LDO, Low Iq, 2.8V±2%, 80mA	SOT-143	26vs	VR1	5c	Ons
LDU	-	NCP563SQ30T1	LVR-IC	LDO, Low Iq, 3V±2%, 80mA	SOT-143	26vs	VR1	5c	Ons
LDV	-	NCP563SQ33T1	LVR-IC	LDO, Low Iq, 3.3V±2%, 80mA	SOT-143	26vs	VR1	5c	Ons
LDX	-	NCP563SQ50T1	LVR-IC	LDO, Low Iq, 5V±2%, 80mA	SOT-143	26vs	VR1	5c	Ons
le	-	PT7M6230NLC4	Vdet-IC	3.0V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
le	gb	PT7M6230NLC4E	Vdet-IC	3.0V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
LE	-	BF1202WE	n-MOSFET	Dual gate, VHF, UHF, 10V, 30mA, 200mW, 30ms	SOT-343R	26fm	-	5c	Phi
LE	-	BU4945F	Vdet-IC	4.5V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
LE	-	R1114Q341A	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
LE	-	RP130Q161D	LVR-IC	LDO, LN, +CE, CL, 1.6V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
LE	-	XC6120C44N	Vdet-IC	4.4V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
LE	-	XC6127N24JNR	Vdet-IC	2.4V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LE	-	XC6223F241NR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
LE-	-	BF1202	n-MOSFET	Dual gate, VHF, UHF, 10V, 30mA, 200mW, 30ms	SOT-143	24fd	-	5c	NxH
LE-	-	BF1202WE	n-MOSFET	Dual gate, VHF, UHF, 10V, 30mA, 200mW, 30ms	SOT-343R	26fm	-	5c	NxH
LEp	-	BF1202	n-MOSFET	Dual gate, VHF, UHF, 10V, 30mA, 200mW, 30ms	SOT-143	24fd	-	5c	Phi
LEp	-	BF1202	n-MOSFET	Dual gate, VHF, UHF, 10V, 30mA, 200mW, 30ms	SOT-143	24fd	-	5c	NxH
LEp	-	BF1202WE	n-MOSFET	Dual gate, VHF, UHF, 10V, 30mA, 200mW, 30ms	SOT-343R	26fm	-	5c	NxH
LEt	-	BF1202	n-MOSFET	Dual gate, VHF, UHF, 10V, 30mA, 200mW, 30ms	SOT-143	24fd	-	5c	NxM
LEt	-	BF1202WE	n-MOSFET	Dual gate, VHF, UHF, 10V, 30mA, 200mW, 30ms	SOT-343R	26fm	-	5c	NxM
LEY	-	NCP562SQ18T1	LVR-IC	LDO, Low Iq, +CE, 1.8V±2%, 80mA	SOT-143	26vp	VR4	5c	Ons
LEZ	-	NCP562SQ27T1	LVR-IC	LDO, Low Iq, +CE, 2.7V±2%, 80mA	SOT-143	26vp	VR4	5c	Ons
lf	-	PT7M6231CLC4	Vdet-IC	3.1V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
lf	gb	PT7M6231CLC4E	Vdet-IC	3.1V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
LF	-	BU4946F	Vdet-IC	4.6V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
LF	-	R1114Q351A	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
LF	-	RP130Q171D	LVR-IC	LDO, LN, +CE, CL, 1.7V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
LF	-	XC6120C45N	Vdet-IC	4.5V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
LF	-	XC6127N26JNR	Vdet-IC	2.6V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LF	-	XC6223F251NR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
LFA	-	NCP563SQ18T1	LVR-IC	LDO, Low Iq, 1.8V±2%, 80mA	SOT-143	26vs	VR1	5c	Ons
LFB	-	NCP563SQ27T1	LVR-IC	LDO, Low Iq, 2.7V±2%, 80mA	SOT-143	26vs	VR1	5c	Ons
lg	-	PT7M6231CHC4	Vdet-IC	3.1V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
lg	gb	PT7M6231CHC4E	Vdet-IC	3.1V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
LG	-	BU4947F	Vdet-IC	4.7V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
LG	-	R1114Q361A	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
LG	-	RP130Q181D	LVR-IC	LDO, LN, +CE, CL, 1.8V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
lh	-	PT7M6231NLC4	Vdet-IC	3.1V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
lh	gb	PT7M6231NLC4E	Vdet-IC	3.1V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
LH	-	BU4948F	Vdet-IC	4.8V±1%, +Reset PPO	SOP-4	23vdl	VD7	5n	Rhm
LH	-	R1114Q371A	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
LH	-	RP130Q181D5	LVR-IC	LDO, LN, +CE, CL, 1.85V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
LH	-	XC6120C46N	Vdet-IC	4.6V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
LH	-	XC6127N28JNR	Vdet-IC	2.8V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LH	-	XC6223F261NR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
li	-	PT7M6232CLC4	Vdet-IC	3.2V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
li	gb	PT7M6232CLC4E	Vdet-IC	3.2V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
lj	-	PT7M6232CHC4	Vdet-IC	3.2V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
lj	gb	PT7M6232CHC4E	Vdet-IC	3.2V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
LJ	-	ETC812JU	Vdet-IC	4.0V±2%, -MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Etc
LJ	-	FM812JUX	Vdet-IC	4.0V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	F
LJ	-	MIC812JU	Vdet-IC	4.0V±1%, -MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Mcr
LJ	-	R1114Q381A	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
LJ	-	RP130Q191D	LVR-IC	LDO, LN, +CE, CL, 1.9V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
LJ	gk	MIC812JUY	Vdet-IC	4.0V±1%, -MR, +Reset PPO, Pb-free	SOT-143	24vdh	VD5	5c	Mcr
lk	-	PT7M6232NLC4	Vdet-IC	3.2V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
lk	gb	PT7M6232NLC4E	Vdet-IC	3.2V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
LK	-	R1114Q391A	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
LK	-	RP130Q201D	LVR-IC	LDO, LN, +CE, CL, 2V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
LK	-	XC6120C47N	Vdet-IC	4.7V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
LK	-	XC6127N30JNR	Vdet-IC	3.0V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LK	-	XC6223F271NR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
ll	-	PT7M6233CLC4	Vdet-IC	3.3V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
ll	gb	PT7M6233CLC4E	Vdet-IC	3.3V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
LL	-	ETC812LU	Vdet-IC	4.63V±2%, -MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Etc
LL	-	FM812LUX	Vdet-IC	4.63V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	F
LL	-	MIC812LU	Vdet-IC	4.63V±1%, -MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Mcr
LL	-	XC6120C48N	Vdet-IC	4.8V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
LL	-	XC6127N32JNR	Vdet-IC	3.2V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LL	-	XC6223F281NR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
LL	gk	MIC812LUY	Vdet-IC	4.63V±1%, -MR, +Reset PPO, Pb-free	SOT-143	24vdh	VD5	5c	Mcr
lm	-	PT7M6233CHC4	Vdet-IC	3.3V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
lm	gb	PT7M6233CHC4E	Vdet-IC	3.3V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
LM	-	ETC812MU	Vdet-IC	4.38V±2%, -MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Etc
LM	-	FM812MUX	Vdet-IC	4.38V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	F
LM	-	MIC812MU	Vdet-IC	4.38V±1%, -MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Mcr
LM	-	XC6120C49N	Vdet-IC	4.9V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
LM	-	XC6127N34JNR	Vdet-IC	3.4V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LM	-	XC6223F291NR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
LM	gk	MIC812MUY	Vdet-IC	4.38V±1%, -MR, +Reset PPO, Pb-free	SOT-143	24vdh	VD5	5c	Mcr
ln	-	PT7M6233NLC4	Vdet-IC	3.3V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
ln	gb	PT7M6233NLC4E	Vdet-IC	3.3V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
LN	-	XC6109N10AN	Vdet-IC	1.0V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
LN	-	XC6119N20ANR	Vdet-IC	2.0V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
LN	-	XC6120C50N	Vdet-IC	5V±2%, CMOS +Reset PPO	SSOT-24	26yu	VD7	5a	Tor
LN	-	XC6127N36JNR	Vdet-IC	3.6V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LN3	-	2SC5228-3	Si-npn	VHF/UHF, LN, 20V, 70mA, 200mW, B=60..120, 7GHz	CP4	26tu	-	5b	San
LN4	-	2SC5228-4	Si-npn	VHF/UHF, LN, 20V, 70mA, 200mW, B=90..180, 7GHz	CP4	26tu	-	5b	San
LN4	-	2SC5501-4	Si-npn	VHF/UHF LN, 20V, 70mA, 500mW, B=90..180, 7GHz	SOT-343	26tu	-	5b	San
LN5	-	2SC5228-5	Si-npn	VHF/UHF, LN, 20V, 70mA, 200mW, B=135..270, 7GHz	CP4	26tu	-	5b	San
LN5	-	2SC5501-5	Si-npn	VHF/UHF LN, 20V, 70mA, 500mW, B=135..270, 7GHz	SOT-343	26tu	-	5b	San
lo	-	PT7M6234CLC4	Vdet-IC	3.4V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
lo	gb	PT7M6234CLC4E	Vdet-IC	3.4V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
lp	-	PT7M6234CHC4	Vdet-IC	3.4V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
lp	gb	PT7M6234CHC4E	Vdet-IC	3.4V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
LP	-	XC6109N11AN	Vdet-IC	1.1V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
LP	-	XC6119N21ANR	Vdet-IC	2.1V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
LP	-	XC6127N38JNR	Vdet-IC	3.8V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LP	-	XC6225A082NR-G	LVR-IC	LDO, 0.8V±30mV, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
lq	-	PT7M6234NLC4	Vdet-IC	3.4V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
lq	gb	PT7M6234NLC4E	Vdet-IC	3.4V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
lr	-	PT7M6235CLC4	Vdet-IC	3.5V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
lr	gb	PT7M6235CLC4E	Vdet-IC	3.5V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
LR	-	ETC812RU	Vdet-IC	2.63V±2%, -MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Etc
LR	-	FM812RUX	Vdet-IC	2.63V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	F
LR	-	MIC812RU	Vdet-IC	2.63V±1%, -MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Mcr
LR	-	XC6109N12AN	Vdet-IC	1.2V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
LR	-	XC6119N22ANR	Vdet-IC	2.2V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
LR	-	XC6127N40JNR	Vdet-IC	4.0V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LR	-	XC6225A08ANR-G	LVR-IC	LDO, 0.85V±30mV, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
LR	gk	MIC812RUY	Vdet-IC	2.63V±1%, -MR, +Reset PPO, Pb-free	SOT-143	24vdh	VD5	5c	Mcr
ls	-	PT7M6235CHC4	Vdet-IC	3.5V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
ls	gb	PT7M6235CHC4E	Vdet-IC	3.5V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
LS	-	ETC812SU	Vdet-IC	2.93V±2%, -MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Etc
LS	-	FM812SUX	Vdet-IC	2.93V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	F



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LS	-	MIC812SU	Vdet-IC	2.93V±1%, -MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Mcr
LS	-	XC6109N13AN	Vdet-IC	1.3V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
LS	-	XC6119N23ANR	Vdet-IC	2.3V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
LS	-	XC6127N42JNR	Vdet-IC	4.2V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LS	-	XC6225A092NR-G	LVR-IC	LDO, 0.9V±30mV, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
LS	gk	MIC812SUY	Vdet-IC	2.93V±1%, -MR, +Reset PPO, Pb-free	SOT-143	24vdh	VD5	5c	Mcr
lt	-	PT7M6235NLC4	Vdet-IC	3.5V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
lt	gb	PT7M6235NLC4E	Vdet-IC	3.5V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
LT	-	ETC812TU	Vdet-IC	3.08V±2%, -MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Etc
LT	-	FM812TUX	Vdet-IC	3.08V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	F
LT	-	MIC812TU	Vdet-IC	3.08V±1%, -MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Mcr
LT	-	XC6109N14AN	Vdet-IC	1.4V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
LT	-	XC6119N24ANR	Vdet-IC	2.4V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
LT	-	XC6127N44JNR	Vdet-IC	4.4V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LT	-	XC6225A09ANR-G	LVR-IC	LDO, 0.95V±30mV, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
LT	gk	MIC812TUY	Vdet-IC	3.08V±1%, -MR, +Reset PPO, Pb-free	SOT-143	24vdh	VD5	5c	Mcr
lu	-	PT7M6236CLC4	Vdet-IC	3.6V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
lu	gb	PT7M6236CLC4E	Vdet-IC	3.6V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
LU	-	XC6109N15AN	Vdet-IC	1.5V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
LU	-	XC6119N25ANR	Vdet-IC	2.5V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
LU	-	XC6127N46JNR	Vdet-IC	4.6V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LU	-	XC6225A102NR-G	LVR-IC	LDO, 1.0V±30mV, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
lv	-	PT7M6236CHC4	Vdet-IC	3.6V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
lv	gb	PT7M6236CHC4E	Vdet-IC	3.6V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
LV	-	XC6109N16AN	Vdet-IC	1.6V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
LV	-	XC6119N26ANR	Vdet-IC	2.6V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
LV	-	XC6127N48JNR	Vdet-IC	4.8V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LV	-	XC6225A10ANR-G	LVR-IC	LDO, 1.05V±30mV, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
lw	-	PT7M6236NLC4	Vdet-IC	3.6V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
lw	gb	PT7M6236NLC4E	Vdet-IC	3.6V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
lx	-	PT7M6237CLC4	Vdet-IC	3.7V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
lx	gb	PT7M6237CLC4E	Vdet-IC	3.7V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
LX	-	XC6109N17AN	Vdet-IC	1.7V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
LX	-	XC6119N27ANR	Vdet-IC	2.7V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
LX	-	XC6127N50JNR	Vdet-IC	5.0V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LX	-	XC6225A112NR-G	LVR-IC	LDO, 1.1V±30mV, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
ly	-	PT7M6237CHC4	Vdet-IC	3.7V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
ly	gb	PT7M6237CHC4E	Vdet-IC	3.7V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
LY	-	XC6109N18AN	Vdet-IC	1.8V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
LY	-	XC6119N28ANR	Vdet-IC	2.8V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
LY	-	XC6127N52JNR	Vdet-IC	5.2V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LY	-	XC6225A11ANR-G	LVR-IC	LDO, 1.15V±30mV, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
lz	-	PT7M6237NLC4	Vdet-IC	3.7V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
lz	gb	PT7M6237NLC4E	Vdet-IC	3.7V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
LZ	-	XC6109N19AN	Vdet-IC	1.9V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
LZ	-	XC6119N29ANR	Vdet-IC	2.9V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
LZ	-	XC6127N54JNR	Vdet-IC	5.4V±0.8%, +Reset ODO, -MR, Rt=400ms	SSOT-24	26cr	VD4	5k	Tor
LZ	-	XC6225A122NR-G	LVR-IC	LDO, 1.2V±30mV, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
M	gc	ELM7533NCB	Vdet-IC	3.3V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
M	gd	ELM7533CCB	Vdet-IC	3.3V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
M0	-	AP8821N-40GI	Vdet-IC	4.0V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
M0	-	AP8821N-40GS	Vdet-IC	4.0V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
M0	-	AP8821N-40PI	Vdet-IC	4.0V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
M0	-	AP8821N-40PS	Vdet-IC	4.0V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
M0	-	R3111Q201A	Vdet-IC	2V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
M0	-	R3116Q171A	Vdet-IC	1.7V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
M0	-	RP104Q281B	LVR-IC	LDO, 2.8V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
M0	-	XC61CN2002N	Vdet-IC	2.0V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
M0	-	XC6225A17ANR-G	LVR-IC	LDO, 1.75V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
M03	-	BSS83	n-MOSFET	Sw, 10V, 50mA, 230mW, Up<2V, <45Ω, 1/5ns	SOT-143	24fx	-	5b	Ste
M04	-	BF904	n-MOSFET	Dual gate, VHF/UHF, 7V, 30mA, 200mW	SOT-143	24fd	-	5c	Phi
M06	-	BF904R	n-MOSFET	Dual gate, VHF/UHF, 7V, 30mA, 200mW	SOT-143	26fm	-	5c	Phi
M0B	-	ADM6711LAKS	Vdet-IC	4.63V±1%, -Reset PPO, -MR	SC-70-4	26vdh	VD5	5b	Ad
M0C	-	ADM6711MAKS	Vdet-IC	4.38V±1%, -Reset PPO, -MR	SC-70-4	26vdh	VD5	5b	Ad
M0D	-	ADM6711TAKS	Vdet-IC	3.08V±1%, -Reset PPO, -MR	SC-70-4	26vdh	VD5	5b	Ad
M0E	-	ADM6711SAKS	Vdet-IC	2.93V±1%, -Reset PPO, -MR	SC-70-4	26vdh	VD5	5b	Ad
M0F	-	ADM6711RAKS	Vdet-IC	2.63V±1%, -Reset PPO, -MR	SC-70-4	26vdh	VD5	5b	Ad
M0G	-	ADM6711ZAKS	Vdet-IC	2.32V±1%, -Reset PPO, -MR	SC-70-4	26vdh	VD5	5b	Ad
M0H	-	ADM6713LAKS	Vdet-IC	4.63V±1%, -Reset ODO, -MR	SC-70-4	26vdh	VD4	5b	Ad
M0J	-	ADM6713MAKS	Vdet-IC	4.38V±1%, -Reset ODO, -MR	SC-70-4	26vdh	VD4	5b	Ad



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M0K	-	ADM6713TAKS	Vdet-IC	3.08V±1%, -Reset ODO, -MR	SC-70-4	26vdh	VD4	5b	Ad
M0L	-	ADM6713SAKS	Vdet-IC	2.93V±1%, -Reset ODO, -MR	SC-70-4	26vdh	VD4	5b	Ad
M0M	-	ADM6713RAKS	Vdet-IC	2.63V±1%, -Reset ODO, -MR	SC-70-4	26vdh	VD4	5b	Ad
M0N	-	ADM6713ZAKS	Vdet-IC	2.32V±1%, -Reset ODO, -MR	SC-70-4	26vdh	VD4	5b	Ad
M1	-	AP8821N-41GI	Vdet-IC	4.1V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
M1	-	AP8821N-41GS	Vdet-IC	4.1V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
M1	-	AP8821N-41PI	Vdet-IC	4.1V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
M1	-	AP8821N-41PS	Vdet-IC	4.1V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
M1	-	R3111Q211A	Vdet-IC	2.1V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
M1	-	R3116Q181A	Vdet-IC	1.8V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
M1	-	RP104Q281B5	LVR-IC	LDO, 2.85V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
M1	-	XC61CN2102N	Vdet-IC	2.1V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
M1	-	XC6225A182NR-G	LVR-IC	LDO, 1.8V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
M1S	-	MA348	C-diode	Dual, FM-tuner AFC, 15V, <16pF	SC-61	24ce	-	5b	Pan
M1S	-	MA4X348	C-diode	Dual, FM-tuner AFC, 15V, <16pF	SC-61	24ce	-	5b	Pan
M2	-	AP8821N-42GI	Vdet-IC	4.2V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
M2	-	AP8821N-42GS	Vdet-IC	4.2V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
M2	-	AP8821N-42PI	Vdet-IC	4.2V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
M2	-	AP8821N-42PS	Vdet-IC	4.2V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
M2	-	R3111Q221A	Vdet-IC	2.2V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
M2	-	R3116Q191A	Vdet-IC	1.9V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
M2	-	RP104Q291B	LVR-IC	LDO, 2.9V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
M2	-	XC61CN2202N	Vdet-IC	2.2V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
M2	-	XC6223G121NR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
M2	-	XC6225A192NR-G	LVR-IC	LDO, 1.9V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
M26	-	BF908	n-MOSFET	Dual gate, VHF/UHF, 12V, 40mA, 200mW, 1GHz	SOT-143	24fd	-	5c	Phi
M28	-	BF909	n-MOSFET	Dual gate, VHF/UHF, 7V, 40mA	SOT-143	24fd	-	5c	Phi
M3	-	AP8821N-43GI	Vdet-IC	4.3V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
M3	-	AP8821N-43GS	Vdet-IC	4.3V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
M3	-	AP8821N-43PI	Vdet-IC	4.3V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
M3	-	AP8821N-43PS	Vdet-IC	4.3V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
M3	-	R3111Q231A	Vdet-IC	2.3V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
M3	-	R3116Q201A	Vdet-IC	2V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
M3	-	RP104Q301B	LVR-IC	LDO, 3.0V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
M3	-	XC61CN2302N	Vdet-IC	2.3V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
M3	-	XC6223G131NR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
M3	-	XC6225A18ANR-G	LVR-IC	LDO, 1.85V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
M32	-	BSD22	n-MOSFET	Sw, Chopper, 20V, 50mA, 230mW, 25Ω(1mA), 1/5ns	SOT-143	24fx	-	5c	Phi
M3K	-	MA999	Si-diode	Sw, 30V, 30mA, Vf<1V(30mA), 1ns	SOT-143	24ce	-	5b	Pan
M4	-	AP8821N-44GI	Vdet-IC	4.4V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
M4	-	AP8821N-44GS	Vdet-IC	4.4V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
M4	-	AP8821N-44PI	Vdet-IC	4.4V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
M4	-	AP8821N-44PS	Vdet-IC	4.4V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
M4	-	R3111Q241A	Vdet-IC	2.4V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
M4	-	R3116Q211A	Vdet-IC	2.1V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
M4	-	RP104Q321B	LVR-IC	LDO, 3.2V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
M4	-	XC61CN2402N	Vdet-IC	2.4V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
M4	-	XC6223G141NR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
M4	-	XC6225A19ANR-G	LVR-IC	LDO, 1.95V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
M4A	-	ADM6711TAKSZ	Vdet-IC	3.08V±1%, -Reset PPO, -MR	SC-70-4	26vdh	VD5	5b	Ad
M4B	-	ADM6711SAKSZ	Vdet-IC	2.93V±1%, -Reset PPO, -MR	SC-70-4	26vdh	VD5	5b	Ad
M4H	-	ADM6711ZAKSZ	Vdet-IC	2.32V±1%, -Reset PPO, -MR	SC-70-4	26vdh	VD5	5b	Ad
M4R	-	ADM6713ZAKSZ	Vdet-IC	2.32V±1%, -Reset ODO, -MR	SC-70-4	26vdh	VD4	5b	Ad
M4S	-	ADM6713RAKSZ	Vdet-IC	2.63V±1%, -Reset ODO, -MR	SC-70-4	26vdh	VD4	5b	Ad
M4U	-	ADM6711LAKSZ	Vdet-IC	4.63V±1%, -Reset PPO, -MR	SC-70-4	26vdh	VD5	5b	Ad
M5	-	AP8821N-45GI	Vdet-IC	4.5V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
M5	-	AP8821N-45GS	Vdet-IC	4.5V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
M5	-	AP8821N-45PI	Vdet-IC	4.5V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
M5	-	AP8821N-45PS	Vdet-IC	4.5V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
M5	-	R3111Q251A	Vdet-IC	2.5V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
M5	-	R3116Q221A	Vdet-IC	2.2V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
M5	-	RP104Q331B	LVR-IC	LDO, 3.3V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
M5	-	XC61CN2502N	Vdet-IC	2.5V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
M5	-	XC6223G151NR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
M5	-	XC6225A202NR-G	LVR-IC	LDO, 2.0V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
M56	-	BF1100	n-MOSFET	Dual gate, VHF, UHF, 14V, 30mA, 200mW	SOT-143	24fd	-	5c	Phi
M57	-	ADM6713SAKSZ	Vdet-IC	2.93V±1%, -Reset ODO, -MR	SC-70-4	26vdh	VD4	5b	Ad
M57	-	BF1100R	n-MOSFET	Dual gate, VHF, UHF, 14V, 30mA, 200mW	SOT-143R	26fm	-	5c	Phi
M5F	-	ADM6711RAKSZ	Vdet-IC	2.63V±1%, -Reset PPO, -MR	SC-70-4	26vdh	VD5	5b	Ad
M6	-	AP8821N-46GI	Vdet-IC	4.6V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M6	-	AP8821N-46GS	Vdet-IC	4.6V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
M6	-	AP8821N-46PI	Vdet-IC	4.6V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
M6	-	AP8821N-46PS	Vdet-IC	4.6V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
M6	-	R3111Q261A	Vdet-IC	2.6V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
M6	-	R3116Q231A	Vdet-IC	2.3V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
M6	-	RP104Q311B	LVR-IC	LDO, 3.1V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
M6	-	XC61CN2602N	Vdet-IC	2.6V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
M6	-	XC6223G161NR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
M6	-	XC6225A20ANR-G	LVR-IC	LDO, 2.05V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
M7	-	AP8821N-47GI	Vdet-IC	4.7V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
M7	-	AP8821N-47GS	Vdet-IC	4.7V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
M7	-	AP8821N-47PI	Vdet-IC	4.7V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
M7	-	AP8821N-47PS	Vdet-IC	4.7V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
M7	-	R3111Q271A	Vdet-IC	2.7V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
M7	-	R3116Q241A	Vdet-IC	2.4V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
M7	-	RP104Q241B	LVR-IC	LDO, 2.4V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
M7	-	XC61CN2702N	Vdet-IC	2.7V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
M7	-	XC6223G171NR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
M7	-	XC6225A212NR-G	LVR-IC	LDO, 2.1V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
M74	-	BSS83	n-MOSFET	Sw, 10V, 50mA, 230mW, Up<2V, <45Ω, 1/5ns	SOT-143	24fx	-	5c	Phi
M8	-	AP8821N-48GI	Vdet-IC	4.8V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
M8	-	AP8821N-48GS	Vdet-IC	4.8V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
M8	-	AP8821N-48PI	Vdet-IC	4.8V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
M8	-	AP8821N-48PS	Vdet-IC	4.8V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
M8	-	R3111Q281A	Vdet-IC	2.8V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
M8	-	R3116Q251A	Vdet-IC	2.5V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
M8	-	RP104Q221B	LVR-IC	LDO, 2.2V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
M8	-	XC61CN2802N	Vdet-IC	2.8V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
M8	-	XC6223G181NR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
M8	-	XC6225A21ANR-G	LVR-IC	LDO, 2.15V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
M83	-	BF997	n-MOSFET	Dual gate, 20V, 30mA, 200mW, Nf=1dB, Idss=20mA, Gf>15mΩ	SOT-143	24fd	-	5c	Phi
M86	-	ADM6711MAKSZ	Vdet-IC	4.38V±1%, -Reset PPO, -MR	SC-70-4	26vdh	VD5	5b	Ad
M87	-	ADM6713LAKSZ	Vdet-IC	4.63V±1%, -Reset ODO, -MR	SC-70-4	26vdh	VD4	5b	Ad
M88	-	ADM6713MAKSZ	Vdet-IC	4.38V±1%, -Reset ODO, -MR	SC-70-4	26vdh	VD4	5b	Ad
M89	-	ADM6713TAKSZ	Vdet-IC	3.08V±1%, -Reset ODO, -MR	SC-70-4	26vdh	VD4	5b	Ad
M9	-	AP8821N-49GI	Vdet-IC	4.9V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
M9	-	AP8821N-49GS	Vdet-IC	4.9V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
M9	-	AP8821N-49PI	Vdet-IC	4.9V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
M9	-	AP8821N-49PS	Vdet-IC	4.9V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
M9	-	R3111Q291A	Vdet-IC	2.9V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
M9	-	R3116Q261A	Vdet-IC	2.6V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
M9	-	RP104Q231B	LVR-IC	LDO, 2.3V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
M9	-	XC61CN2902N	Vdet-IC	2.9V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
M9	-	XC6223G191NR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
M9	-	XC6225A222NR-G	LVR-IC	LDO, 2.2V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
M94	-	BF994	n-MOSFET	Dual gate, 20V, 30mA, 200mW, Nf=1dB, Idss=20mA, Gf>15mΩ	SOT-143	24fd	-	5b	Vs
M95	-	BF996S	n-MOSFET	Dual gate, 20V, 50mA, 200mW, NF=1dB, Idss=20mA, Gf>15mΩ	SOT-143	24fd	-	5b	Vs
M96	-	BF996	n-MOSFET	Dual gate, 20V, 50mA, 200mW, NF=1dB, Idss=20mA, Gf>15mΩ	SOT-143	24fd	-	5b	Vs
M97	-	BFR101A	n-FET+Di	GP, 30V, 20mA, 200mW, Idss=0.2..1.5mA, Up<1V	SOT-143	25ft	-	5b	Phi
M98	-	BFR101B	n-FET+Di	GP, 30V, 20mA, 200mW, Idss=1.0..5.0mA, Up<1V	SOT-143	25ft	-	5b	Phi
ma	-	PT7M6238CLC4	Vdet-IC	3.8V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
ma	gb	PT7M6238CLC4E	Vdet-IC	3.8V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
MA	-	ASM161LCUSF	Vdet-IC	4.63V±2%, -MR, -Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MA	-	R1114Q401A	LVR-IC	LDO, Low noise, 4.0V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
MA	-	RP130Q211D	LVR-IC	LDO, LN, +CE, CL, 2.1V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
MA	-	XC6120N10N	Vdet-IC	1V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MA	-	XC6127N16KNR	Vdet-IC	1.6V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
MA	-	XC6223G201NR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
mb	-	PT7M6238CHC4	Vdet-IC	3.8V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
mb	gb	PT7M6238CHC4E	Vdet-IC	3.8V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
MB	-	ASM161MCUSF	Vdet-IC	4.38V±2%, -MR, -Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MB	-	BF995	n-MOSFET	AF, 20V, 30mA, 200mW, Nf=1.1dB, Idss=40mA, Gf>12Ω	SOT-143	24fd	-	5b	Sie
MB	-	BF998WR	n-MOSFET	Dual gate, 12V, 30mA, 200mW, Nf=1dB, Idss=20mA, Gf>24mΩ	SOT-343	24fm	-	5c	Phi
MB	-	R1114Q281A5	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, -CE	SC-82AB	26vn	VR4	5m	Ric
MB	-	RP130Q221D	LVR-IC	LDO, LN, +CE, CL, 2.2V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
MB	-	XC6120N11N	Vdet-IC	1.1V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MB	-	XC6127N18KNR	Vdet-IC	1.8V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
MB	-	XC6223G211NR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
MB3	-	ADM811-3TART	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5b	Ad
MBB	-	ADM811RART	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5b	Ad



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MBE	-	ADM811SART	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5b	Ad
MBG	-	ADM811TART	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5b	Ad
MBT	-	ADM811MART	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5b	Ad
MBV	-	ADM811LART	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5b	Ad
MBZ	-	ADM811ZART	Vdet-IC	2.32V±2%, MR, -Reset PPO	SOT-143	24vdh	VD5	5c	Ad
mc	-	PT7M6238NLC4	Vdet-IC	3.8V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
mc	gb	PT7M6238NLC4E	Vdet-IC	3.8V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
MC	-	ASM161JCUSF	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MC	-	RP130Q231D	LVR-IC	LDO, LN, +CE, CL, 2.3V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
MC	-	XC6120N12N	Vdet-IC	1.2V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MC	-	XC6127N20KNR	Vdet-IC	2.0V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
MC	-	XC6223G221NR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
MCB	-	ADM812RART	Vdet-IC	2.63V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5b	Ad
MCE	-	ADM812SART	Vdet-IC	2.93V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5b	Ad
MCG	-	ADM812TART	Vdet-IC	3.08V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5b	Ad
MCO	-	2SC5088-O	Si-npn	VHF/UHF, LN, 20V, 80mA, 100mW, 7GHz, B=80..160	USQ	24tu	-	5b	Tos
MCT	-	ADM812MART	Vdet-IC	4.38V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5b	Ad
MCV	-	ADM812LART	Vdet-IC	4.63V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5b	Ad
MCY	-	2SC5088-Y	Si-npn	VHF/UHF, LN, 20V, 80mA, 100mW, 7GHz, B=120..240	USQ	24tu	-	5b	Tos
MCZ	-	ADM812ZART	Vdet-IC	2.32V±2%, MR, +Reset PPO	SOT-143	24vdh	VD5	5c	Ad
md	-	PT7M6239CLC4	Vdet-IC	3.9V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
md	gb	PT7M6239CLC4E	Vdet-IC	3.9V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
MD	-	ASM161TCUSF	Vdet-IC	3.08V±2%, -MR, -Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MD	-	BF996	n-MOSFET	Dual gate, 20V, 50mA, 200mW, NF=1dB, Idss=20mA, Gf>15mΩ	SOT-143	24fd	-	5b	Sie
MD	-	RP130Q241D	LVR-IC	LDO, LN, +CE, CL, 2.4V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
MD	-	XC6120N13N	Vdet-IC	1.3V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MD	-	XC6127N22KNR	Vdet-IC	2.2V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
MD	-	XC6223G231NR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
MDB	-	ADM6315-26D1ART	Vdet-IC	2.63V±2%, MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Ad
MDC	-	ADM6315-29D1ART	Vdet-IC	2.93V±2%, MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Ad
MDG	-	ADM6315-31D1ART	Vdet-IC	3.08V±2%, MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Ad
MDO	-	2SC5093-O	Si-npn	VHF/UHF, LN, 20V, 40mA, 100mW, 10GHz, B=80..160	USQ	24tu	-	5b	Tos
MDR	-	2SC5093-R	Si-npn	VHF/UHF, LN, 20V, 40mA, 100mW, 10GHz, B=50..100	USQ	24tu	-	5b	Tos
MDT	-	ADM6315-44D1ART	Vdet-IC	4.39V±2%, MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Ad
MDU	-	ADM6315-45D1ART	Vdet-IC	4.5V±2%, MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Ad
MDV	-	ADM6315-46D1ART	Vdet-IC	4.63V±2%, MR, -Reset ODO, 1ms	SOT-143	24vdh	VD4	5c	Ad
me	-	PT7M6239CHC4	Vdet-IC	3.9V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
me	gb	PT7M6239CHC4E	Vdet-IC	3.9V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
ME	-	ASM161SCUSF	Vdet-IC	2.93V±2%, -MR, -Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
ME	-	RP130Q251D	LVR-IC	LDO, LN, +CE, CL, 2.5V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
ME	-	XC6120N14N	Vdet-IC	1.4V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
ME	-	XC6127N24KNR	Vdet-IC	2.4V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
ME	-	XC6223G241NR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
MEB	-	ADM6315-26D2ART	Vdet-IC	2.63V±2%, MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Ad
MEC	-	ADM6315-29D2ART	Vdet-IC	2.93V±2%, MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Ad
MEG	-	ADM6315-31D2ART	Vdet-IC	3.08V±2%, MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Ad
MEO	-	2SC5098-O	Si-npn	VHF/UHF, LN, 20V, 15mA, 100mW, 10GHz, B=80..160	USQ	26tu	-	5b	Tos
MER	-	2SC5098-R	Si-npn	VHF/UHF, LN, 20V, 15mA, 100mW, 10GHz, B=50..100	USQ	26tu	-	5b	Tos
MET	-	ADM6315-44D2ART	Vdet-IC	4.39V±2%, MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Ad
MEU	-	ADM6315-45D2ART	Vdet-IC	4.5V±2%, MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Ad
MEV	-	ADM6315-46D2ART	Vdet-IC	4.63V±2%, MR, -Reset ODO, 20ms	SOT-143	24vdh	VD4	5c	Ad
mf	-	PT7M6239NLC4	Vdet-IC	3.9V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
mf	gb	PT7M6239NLC4E	Vdet-IC	3.9V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
MF	-	ASM161RCUSF	Vdet-IC	2.63V±2%, -MR, -Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MF	-	BF1100WR	n-MOSFET	Dual gate, VHF, UHF, 14V, 30mA, 200mW	SOT-343R	26fm	-	5c	Phi
MF	-	RP130Q261D	LVR-IC	LDO, LN, +CE, CL, 2.6V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
MF	-	XC6120N15N	Vdet-IC	1.5V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MF	-	XC6127N26KNR	Vdet-IC	2.6V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
MF	-	XC6223G251NR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
MFB	-	ADM6315-26D3ART	Vdet-IC	2.63V±2%, MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Ad
MFC	-	ADM6315-29D3ART	Vdet-IC	2.93V±2%, MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Ad
MFG	-	ADM6315-31D3ART	Vdet-IC	3.08V±2%, MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Ad
MFT	-	ADM6315-44D3ART	Vdet-IC	4.39V±2%, MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Ad
MFU	-	ADM6315-45D3ART	Vdet-IC	4.5V±2%, MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Ad
MFV	-	ADM6315-46D3ART	Vdet-IC	4.63V±2%, MR, -Reset ODO, 140ms	SOT-143	24vdh	VD4	5c	Ad
mg	-	PT7M6240CLC4	Vdet-IC	4.0V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
mg	gb	PT7M6240CLC4E	Vdet-IC	4.0V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
MG	-	ASM162LCUSF	Vdet-IC	4.63V±2%, -MR, +Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MG	-	BF994S	n-MOSFET	Dual gate, 20V, 30mA, 200mW, Nf=1dB, Idss=20mA, Gf>15mΩ	SOT-143	24fd	-	5b	Sil
MG	-	RP130Q271D	LVR-IC	LDO, LN, +CE, CL, 2.7V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MGB	-	ADM6315-26D4ART	Vdet-IC	2.63V±2%, MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Ad
MGC	-	ADM6315-29D4ART	Vdet-IC	2.93V±2%, MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Ad
MGG	-	ADM6315-31D4ART	Vdet-IC	3.08V±2%, MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Ad
MGp	-	BF994S	n-MOSFET	Dual gate, 20V, 30mA, 200mW, Nf=1dB, Idss=20mA, Gf>15mΩ	SOT-143	24fd	-	5c	Phi
MGs	-	BF994S	n-MOSFET	Dual gate, 20V, 30mA, 200mW, Nf=1dB, Idss=20mA, Gf>15mΩ	SOT-143	24fd	-	5b	Sie
MGT	-	ADM6315-44D4ART	Vdet-IC	4.39V±2%, MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Ad
MGU	-	ADM6315-45D4ART	Vdet-IC	4.5V±2%, MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Ad
MGV	-	ADM6315-46D4ART	Vdet-IC	4.63V±2%, MR, -Reset ODO, 1120ms	SOT-143	24vdh	VD4	5c	Ad
mh	-	PT7M6240CHC4	Vdet-IC	4.0V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
mh	gb	PT7M6240CHC4E	Vdet-IC	4.0V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
MH	-	2SC3609	Si-npn	VHF/UHF, LN, 12V, 80mA, 150mW, 7GHz, B=30..250	SOT-143	26tu	-	5b	Tos
MH	-	ASM162MCUSF	Vdet-IC	4.38V±2%, -MR, +Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MH	-	BF996S	n-MOSFET	Dual gate, 20V, 50mA, 200mW, NF=1dB, Idss=20mA, Gf>15mΩ	SOT-143	24fd	-	5b	Sie
MH	-	RP130Q281D	LVR-IC	LDO, LN, +CE, CL, 2.8V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
MH	-	XC6120N16N	Vdet-IC	1.6V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MH	-	XC6127N28KNR	Vdet-IC	2.8V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
MH	-	XC6223G261NR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
MHp	-	BF996S	n-MOSFET	Dual gate, 20V, 50mA, 200mW, NF=1dB, Idss=20mA, Gf>15mΩ	SOT-143	24fd	-	5c	Phi
MHs	-	BF996S	n-MOSFET	Dual gate, 20V, 50mA, 200mW, NF=1dB, Idss=20mA, Gf>15mΩ	SOT-143	24fd	-	5b	Sie
mi	-	PT7M6240NLC4	Vdet-IC	4.0V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
mi	gb	PT7M6240NLC4E	Vdet-IC	4.0V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
MI	-	2SC3745	Si-npn	UHF, 20V, 30mA, 6.5GHz	SOT-143	26tu	-	5b	Tos
MI	-	ASM162JCUSF	Vdet-IC	4.0V±2%, -MR, +Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MI-	-	2SC4126	Si-npn	VHF/UHF, 15V, 50mA, 150mW, B=50..250, 6GHz	SOT-143	26tu	-	5c	Ren
mj	-	PT7M6241CLC4	Vdet-IC	4.1V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
mj	gb	PT7M6241CLC4E	Vdet-IC	4.1V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
MJ	-	ASM162TCUSF	Vdet-IC	3.08V±2%, -MR, +Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MJ	-	RP130Q281D5	LVR-IC	LDO, LN, +CE, CL, 2.85V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
mk	-	PT7M6241CHC4	Vdet-IC	4.1V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
mk	gb	PT7M6241CHC4E	Vdet-IC	4.1V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
MK	-	2SC4315	Si-npn	VHF/UHF, LN, 20V, 80mA, 150mW, B=30..250, 7GHz	SOT-143	26tu	-	5b	Tos
MK	-	2SC4842	Si-npn	VHF-UHF, LN, 20V, 80mA, 100mW, B=30..250, 7GHz	2-2K1A	23t8	-	5b	Tos
MK	-	ASM162SCUSF	Vdet-IC	2.93V±2%, -MR, +Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MK	-	BF997	n-MOSFET	Dual gate, 20V, 30mA, 200mW, Nf=1dB, Idss=20mA, Gf>15mΩ	SOT-143	24fd	-	5b	Sie
MK	-	RP130Q291D	LVR-IC	LDO, LN, +CE, CL, 2.9V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
MK	-	XC6120N17N	Vdet-IC	1.7V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MK	-	XC6127N30KNR	Vdet-IC	3.0V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
MK	-	XC6223G271NR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
MKp	-	BF997	n-MOSFET	Dual gate, 20V, 30mA, 200mW, Nf=1dB, Idss=20mA, Gf>15mΩ	SOT-143	24fd	-	5c	Phi
ml	-	PT7M6241NLC4	Vdet-IC	4.1V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
ml	gb	PT7M6241NLC4E	Vdet-IC	4.1V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
ML	-	ASM162RCUSF	Vdet-IC	2.63V±2%, -MR, +Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
ML	-	XC6120N18N	Vdet-IC	1.8V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
ML	-	XC6127N32KNR	Vdet-IC	3.2V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
ML	-	XC6223G281NR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
mm	-	PT7M6242CLC4	Vdet-IC	4.2V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
mm	gb	PT7M6242CLC4E	Vdet-IC	4.2V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
MM	-	ASM161LEUSF	Vdet-IC	4.63V±2%, -MR, -Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MM	-	XC6120N19N	Vdet-IC	1.9V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MM	-	XC6127N34KNR	Vdet-IC	3.4V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
MM	-	XC6223G291NR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
mn	-	PT7M6242CHC4	Vdet-IC	4.2V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
mn	gb	PT7M6242CHC4E	Vdet-IC	4.2V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
MN	-	2SC4843	Si-npn	VHF-UHF, LN, 20V, 40mA, 100mW, B=50..250, 10GHz	2-2K1A	23t8	-	5b	Tos
MN	-	ASM161MEUSF	Vdet-IC	4.38V±2%, -MR, -Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MN	-	XC6109N20AN	Vdet-IC	2.0V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
MN	-	XC6119N30ANR	Vdet-IC	3.0V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
MN	-	XC6120N20N	Vdet-IC	2V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MN	-	XC6127N36KNR	Vdet-IC	3.6V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
MN3	-	2SC5276-3	Si-npn	UHF-S-band, 20V, 30mA, 200mW, B=60..120, 11GHz	CP4	26tu	-	5b	San
MN4	-	2SC5276-4	Si-npn	UHF-S-band, 20V, 30mA, 200mW, B=90..180, 11GHz	CP4	26tu	-	5b	San
MN4	-	2SC5504-4	Si-npn	UHF-S-Band, LN, 20V, 30mA, 300mW, B=90..180, 11GHz	SOT-343	26tu	-	5b	San
MN5	-	2SC5276-5	Si-npn	UHF-S-band, 20V, 30mA, 200mW, B=135..270, 11GHz	CP4	26tu	-	5b	San
MN5	-	2SC5504-5	Si-npn	UHF-S-Band, LN, 20V, 30mA, 300mW, B=135..270, 11GHz	SOT-343	26tu	-	5b	San
mo	-	PT7M6242NLC4	Vdet-IC	4.2V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
mo	gb	PT7M6242NLC4E	Vdet-IC	4.2V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
MO	-	2SC4844	Si-npn	VHF-UHF, LN, 20V, 15mA, 100mW, B=50..250, 10GHz	2-2K1A	23t8	-	5b	Tos
MO	-	ASM161JEUSF	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MO	-	BF998	n-MOSFET	Dual gate, 12V, 30mA, 200mW, Nf=1dB, Idss=20mA, Gf>24mΩ	SOT-143	24fd	-	5b	Sie
MO1	-	BF901	n-MOSFET	Dual gate, VHF/UHF, 12V, 30mA	SOT-143	24fd	-	5c	Phi

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MOp	-	BF998R	n-MOSFET	Dual gate, 12V, 30mA, 200mW, Nf=1dB, Idss=20mA, Gf>24mΩ	SOT-143R	24fm	-	5c	Phi
MOR	-	BF998R	n-MOSFET	Dual gate, 12V, 30mA, 200mW, Nf=1dB, Idss=20mA, Gf>24mΩ	SOT-143R	24fm	-	5b	Sil
MOs	-	BF998	n-MOSFET	Dual gate, 12V, 30mA, 200mW, Nf=1dB, Idss=20mA, Gf>24mΩ	SOT-143	24fd	-	5b	Sie
mp	-	PT7M6243CLC4	Vdet-IC	4.3V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
mp	gb	PT7M6243CLC4E	Vdet-IC	4.3V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
MP	-	ASM161TEUSF	Vdet-IC	3.08V±2%, -MR, -Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MP	-	XC6109N21AN	Vdet-IC	2.1V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
MP	-	XC6119N31ANR	Vdet-IC	3.1V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
MP	-	XC6120N21N	Vdet-IC	2.1V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MP	-	XC6127N38KNR	Vdet-IC	3.8V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
mq	-	PT7M6243CHC4	Vdet-IC	4.3V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
mq	gb	PT7M6243CHC4E	Vdet-IC	4.3V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
MQ	-	ASM161SEUSF	Vdet-IC	2.93V±2%, -MR, -Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
mr	-	PT7M6243NLC4	Vdet-IC	4.3V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
mr	gb	PT7M6243NLC4E	Vdet-IC	4.3V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
MR	-	ASM161REUSF	Vdet-IC	2.63V±2%, -MR, -Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MR	-	BF998W	n-MOSFET	Dual gate, 12V, 30mA, 200mW, Nf=1dB, Idss=20mA, Gf>24mΩ	SOT-143R	24fm	-	5b	Sie
MR	-	MT4S03A	Si-npn	VHF/UHF, 10V, 40mA, 10GHz	SOT-143	26tu	-	5b	Tos
MR	-	XC6109N22AN	Vdet-IC	2.2V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
MR	-	XC6119N32ANR	Vdet-IC	3.2V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
MR	-	XC6120N22N	Vdet-IC	2.2V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MR	-	XC6127N40KNR	Vdet-IC	4.0V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
ms	-	PT7M6244CLC4	Vdet-IC	4.4V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
ms	gb	PT7M6244CLC4E	Vdet-IC	4.4V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
Ms	-	BAR65-07	PIN-diode	Dual, TV-Tuner, 30V, 100mA, Vf<1V(50mA), <0.9pF	SOT-143	24ce	-	5h	Inf
MS	-	ASM162LEUSF	Vdet-IC	4.63V±2%, -MR, +Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MS	-	XC6109N23AN	Vdet-IC	2.3V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
MS	-	XC6119N33ANR	Vdet-IC	3.3V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
MS	-	XC6120N23N	Vdet-IC	2.3V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MS	-	XC6127N42KNR	Vdet-IC	4.2V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
MSs	-	CF739	n-MESFET	GaAs, Dual gate, UHF, 10V, 80mA, 240mW, Idss=6..60mA, Gfs=25ms	SOT-143	24fd	-	5h	Inf
mt	-	PT7M6244CHC4	Vdet-IC	4.4V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
mt	gb	PT7M6244CHC4E	Vdet-IC	4.4V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
MT	-	ASM162MEUSF	Vdet-IC	4.38V±2%, -MR, +Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MT	-	XC6109N24AN	Vdet-IC	2.4V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
MT	-	XC6119N34ANR	Vdet-IC	3.4V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
MT	-	XC6120N24N	Vdet-IC	2.4V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MT	-	XC6127N44KNR	Vdet-IC	4.4V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
mu	-	PT7M6244NLC4	Vdet-IC	4.4V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
mu	gb	PT7M6244NLC4E	Vdet-IC	4.4V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
MU	-	ASM162JEUSF	Vdet-IC	4.0V±2%, -MR, +Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MU	-	XC6109N25AN	Vdet-IC	2.5V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
MU	-	XC6119N35ANR	Vdet-IC	3.5V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
MU	-	XC6120N25N	Vdet-IC	2.5V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MU	-	XC6127N46KNR	Vdet-IC	4.6V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
mv	-	PT7M6245CLC4	Vdet-IC	4.5V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
mv	gb	PT7M6245CLC4E	Vdet-IC	4.5V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
MV	-	ASM162TEUSF	Vdet-IC	3.08V±2%, -MR, +Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MV	-	XC6109N26AN	Vdet-IC	2.6V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
MV	-	XC6119N36ANR	Vdet-IC	3.6V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
MV	-	XC6120N26N	Vdet-IC	2.6V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MV	-	XC6127N48KNR	Vdet-IC	4.8V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
mw	-	PT7M6245CHC4	Vdet-IC	4.5V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
mw	gb	PT7M6245CHC4E	Vdet-IC	4.5V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
MW	-	ASM162SEUSF	Vdet-IC	2.93V±2%, -MR, +Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MW	-	BF996S	n-MOSFET	Dual gate, 20V, 50mA, 200mW, NF=1dB, Idss=20mA, Gf>15mΩ	SOT-143	24fd	-	5c	Phi
mx	-	PT7M6245NLC4	Vdet-IC	4.5V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
mx	gb	PT7M6245NLC4E	Vdet-IC	4.5V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
MX	-	ASM162REUSF	Vdet-IC	2.63V±2%, -MR, +Reset ODO, Lead-free	SOT-143	24vdh	VD4	5c	Pcr
MX	-	CF750	MMIC	GaAs UHF-mix, amp, 8V, 80mA, 300mW, Gfs=25ms	SOT-143	24ai	A2	5h	Inf
MX	-	XC6109N27AN	Vdet-IC	2.7V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
MX	-	XC6119N37ANR	Vdet-IC	3.7V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
MX	-	XC6120N27N	Vdet-IC	2.7V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MX	-	XC6127N50KNR	Vdet-IC	5.0V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
my	-	PT7M6246CLC4	Vdet-IC	4.6V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
my	gb	PT7M6246CLC4E	Vdet-IC	4.6V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
MY	-	XC6109N28AN	Vdet-IC	2.8V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
MY	-	XC6119N38ANR	Vdet-IC	3.8V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
MY	-	XC6120N28N	Vdet-IC	2.8V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MY	-	XC6127N52KNR	Vdet-IC	5.2V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MYs	-	BF1012	n-MOSFET	Dual gate, 16V, Id=25mA, 200mW, Nf=1.4dB, Gf=26mΩ	SOT-143	24fd	-	5b	Sie
MYs	-	BF1012W	n-MOSFET	Dual gate, 16V, Id=25mA, 200mW, Nf=1.4dB, Gf=26mΩ	SOT-343	26fm	-	5h	Sie
mz	-	PT7M6246CHC4	Vdet-IC	4.6V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
mz	gb	PT7M6246CHC4E	Vdet-IC	4.6V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
MZ	-	BF1005W	n-MOSFET	Dual gate, VHF, UHF, 7V, 30mA, 200mW	SOT-343R	26fm	-	5h	Inf
MZ	-	XC6109N29AN	Vdet-IC	2.9V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
MZ	-	XC6119N39ANR	Vdet-IC	3.9V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
MZ	-	XC6120N29N	Vdet-IC	2.9V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
MZ	-	XC6127N54KNR	Vdet-IC	5.4V±0.8%, +Reset ODO, -MR, Rt=800ms	SSOT-24	26cr	VD4	5k	Tor
MZs	-	BF1005	n-MOSFET	Dual gate, VHF, UHF, 7V, 30mA, 200mW	SOT-143	24fd	-	5h	Inf
MZs	-	BF1005R	n-MOSFET	Dual gate, VHF, UHF, 7V, 30mA, 200mW	SOT-143R	26fm	-	5h	Inf
N	gc	ELM7534NCB	Vdet-IC	3.4V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
N	gd	ELM7534CCB	Vdet-IC	3.4V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
N0	-	AP8821N-50GI	Vdet-IC	5.0V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
N0	-	AP8821N-50GS	Vdet-IC	5.0V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
N0	-	AP8821N-50PI	Vdet-IC	5.0V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
N0	-	AP8821N-50PS	Vdet-IC	5.0V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
N0	-	BFG505W	Si-npn	UHF, 20V, 18mA, 150mW, B=120..250, 9GHz	SOT-343	24t6	-	5b	Phi
N0	-	R3111Q301A	Vdet-IC	3V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
N0	-	R3116Q271A	Vdet-IC	2.7V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
N0	-	RP104Q121C	LVR-IC	LDO, 1.2V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
N0	-	XC6120N30N	Vdet-IC	3V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
N0	-	XC61CN3002N	Vdet-IC	3.0V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
N082A	-	VDA0820NTN	Vdet-IC	0.8V±2%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N092A	-	VDA0920NTN	Vdet-IC	0.9V±2%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N1	-	AP8821N-51GI	Vdet-IC	5.1V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
N1	-	AP8821N-51GS	Vdet-IC	5.1V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
N1	-	AP8821N-51PI	Vdet-IC	5.1V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
N1	-	AP8821N-51PS	Vdet-IC	5.1V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
N1	-	BFG505W/X	Si-npn	UHF, 20V, 18mA, 150mW, B=120..250, 9GHz	SOT-343	26tc	-	5b	Phi
N1	-	R3111Q311A	Vdet-IC	3.1V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
N1	-	R3116Q281A	Vdet-IC	2.8V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
N1	-	RP104Q131C	LVR-IC	LDO, 1.3V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
N1	-	XC6120N31N	Vdet-IC	3.1V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
N1	-	XC61CN3102N	Vdet-IC	3.1V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
N102A	-	VDA1020NTN	Vdet-IC	1.0V±2%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N112A	-	VDA1120NTN	Vdet-IC	1.1V±2%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N122A	-	VDA1220NTN	Vdet-IC	1.2V±2%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N132A	-	VDA1320NTN	Vdet-IC	1.3V±2%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N142A	-	VDA1420NTN	Vdet-IC	1.4V±2%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N152A	-	VDA1520NTN	Vdet-IC	1.5V±2%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N162A	-	VDA1620NTN	Vdet-IC	1.6V±2%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N172A	-	VDA1720NTN	Vdet-IC	1.7V±2%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N181A	-	VDA1810NTN	Vdet-IC	1.8V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N18LA	-	VDD1810LNTN	Vdet-IC	1.8V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N18MA	-	VDD1810MNTN	Vdet-IC	1.8V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N18SA	-	VDD1810SNTN	Vdet-IC	1.8V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N191A	-	VDA1910NTN	Vdet-IC	1.9V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N19LA	-	VDD1910LNTN	Vdet-IC	1.9V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N19MA	-	VDD1910MNTN	Vdet-IC	1.9V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N19SA	-	VDD1910SNTN	Vdet-IC	1.9V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N2	-	AP8821N-52GI	Vdet-IC	5.2V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
N2	-	AP8821N-52GS	Vdet-IC	5.2V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
N2	-	AP8821N-52PI	Vdet-IC	5.2V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
N2	-	AP8821N-52PS	Vdet-IC	5.2V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
N2	-	R3111Q321A	Vdet-IC	3.2V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
N2	-	R3116Q291A	Vdet-IC	2.9V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
N2	-	RP104Q151C	LVR-IC	LDO, 1.5V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
N2	-	XC6120N32N	Vdet-IC	3.2V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
N2	-	XC61CN3202N	Vdet-IC	3.2V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
N2	-	XC6223H121NR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
N20	-	DA227	Si-diode	Dual, Sw, 80V, 300mA, 150mW, Vf<1.2V(100mA), <1.5ns	SOT-343	23ce	-	5f	Rhm
N201A	-	VDA2010NTN	Vdet-IC	2.0V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N20LA	-	VDD2010LNTN	Vdet-IC	2.0V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N20MA	-	VDD2010MNTN	Vdet-IC	2.0V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N20SA	-	VDD2010SNTN	Vdet-IC	2.0V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N211A	-	VDA2110NTN	Vdet-IC	2.1V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N21LA	-	VDD2110LNTN	Vdet-IC	2.1V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N21MA	-	VDD2110MNTN	Vdet-IC	2.1V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N21SA	-	VDD2110SNTN	Vdet-IC	2.1V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N221A	-	VDA2210NTN	Vdet-IC	2.2V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N22LA	-	VDD2210LNTN	Vdet-IC	2.2V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N22MA	-	VDD2210MNTN	Vdet-IC	2.2V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N22SA	-	VDD2210SNTN	Vdet-IC	2.2V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N231A	-	VDA2310NTN	Vdet-IC	2.3V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N23LA	-	VDD2310LNTN	Vdet-IC	2.3V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N23MA	-	VDD2310MNTN	Vdet-IC	2.3V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N23SA	-	VDD2310SNTN	Vdet-IC	2.3V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N241A	-	VDA2410NTN	Vdet-IC	2.4V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N24LA	-	VDD2410LNTN	Vdet-IC	2.4V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N24MA	-	VDD2410MNTN	Vdet-IC	2.4V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N24SA	-	VDD2410SNTN	Vdet-IC	2.4V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N251A	-	VDA2510NTN	Vdet-IC	2.5V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N25LA	-	VDD2510LNTN	Vdet-IC	2.5V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N25MA	-	VDD2510MNTN	Vdet-IC	2.5V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N25SA	-	VDD2510SNTN	Vdet-IC	2.5V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N261A	-	VDA2610NTN	Vdet-IC	2.6V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N26LA	-	VDD2610LNTN	Vdet-IC	2.6V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N26MA	-	VDD2610MNTN	Vdet-IC	2.6V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N26SA	-	VDD2610SNTN	Vdet-IC	2.6V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N271A	-	VDA2710NTN	Vdet-IC	2.7V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N27LA	-	VDD2710LNTN	Vdet-IC	2.7V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N27MA	-	VDD2710MNTN	Vdet-IC	2.7V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N27SA	-	VDD2710SNTN	Vdet-IC	2.7V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N281A	-	VDA2810NTN	Vdet-IC	2.8V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N28LA	-	VDD2810LNTN	Vdet-IC	2.8V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N28MA	-	VDD2810MNTN	Vdet-IC	2.8V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N28SA	-	VDD2810SNTN	Vdet-IC	2.8V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N291A	-	VDA2910NTN	Vdet-IC	2.9V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N29LA	-	VDD2910LNTN	Vdet-IC	2.9V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N29MA	-	VDD2910MNTN	Vdet-IC	2.9V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N29SA	-	VDD2910SNTN	Vdet-IC	2.9V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N3	-	AP8821N-53GI	Vdet-IC	5.3V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
N3	-	AP8821N-53GS	Vdet-IC	5.3V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
N3	-	AP8821N-53PI	Vdet-IC	5.3V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
N3	-	AP8821N-53PS	Vdet-IC	5.3V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
N3	-	BFG520W	Si-npn	UHF, 20V, 70mA, 300mW, B=60..250, 9GHz	SOT-343	24t6	-	5b	Phi
N3	-	R3111Q331A	Vdet-IC	3.3V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
N3	-	R3116Q301A	Vdet-IC	3V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
N3	-	RP104Q181C	LVR-IC	LDO, 1.8V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
N3	-	XC6120N33N	Vdet-IC	3.3V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
N3	-	XC61CN3302N	Vdet-IC	3.3V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
N3	-	XC6223H131NR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
N301A	-	VDA3010NTN	Vdet-IC	3.0V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N30LA	-	VDD3010LNTN	Vdet-IC	3.0V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N30MA	-	VDD3010MNTN	Vdet-IC	3.0V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N30SA	-	VDD3010SNTN	Vdet-IC	3.0V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N311A	-	VDA3110NTN	Vdet-IC	3.1V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N31LA	-	VDD3110LNTN	Vdet-IC	3.1V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N31MA	-	VDD3110MNTN	Vdet-IC	3.1V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N31SA	-	VDD3110SNTN	Vdet-IC	3.1V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N321A	-	VDA3210NTN	Vdet-IC	3.2V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N32LA	-	VDD3210LNTN	Vdet-IC	3.2V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N32MA	-	VDD3210MNTN	Vdet-IC	3.2V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N32SA	-	VDD3210SNTN	Vdet-IC	3.2V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N33	-	BFG505	Si-npn	UHF, 20V, 18mA, 150mW, B=120..250, 9GHz	SOT-143	24t6	-	5b	Phi
N331A	-	VDA3310NTN	Vdet-IC	3.3V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N33LA	-	VDD3310LNTN	Vdet-IC	3.3V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N33MA	-	VDD3310MNTN	Vdet-IC	3.3V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N33SA	-	VDD3310SNTN	Vdet-IC	3.3V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N341A	-	VDA3410NTN	Vdet-IC	3.4V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N34LA	-	VDD3410LNTN	Vdet-IC	3.4V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N34MA	-	VDD3410MNTN	Vdet-IC	3.4V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N34SA	-	VDD3410SNTN	Vdet-IC	3.4V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N351A	-	VDA3510NTN	Vdet-IC	3.5V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N35LA	-	VDD3510LNTN	Vdet-IC	3.5V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N35MA	-	VDD3510MNTN	Vdet-IC	3.5V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N35SA	-	VDD3510SNTN	Vdet-IC	3.5V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N36	-	BFG520	Si-npn	UHF, 20V, 70mA, 300mW, B=60..250, 9GHz	SOT-143	24t6	-	5b	Phi
N361A	-	VDA3610NTN	Vdet-IC	3.6V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N36LA	-	VDD3610LNTN	Vdet-IC	3.6V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N36MA	-	VDD3610MNTN	Vdet-IC	3.6V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N36SA	-	VDD3610SNTN	Vdet-IC	3.6V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N37	-	BFG540	Si-npn	UHF, 20V, 120mA, 400mW, B=60..250, 9GHz	SOT-143	24t6	-	5b	Phi
N371A	-	VDA3710NTN	Vdet-IC	3.7V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N37LA	-	VDD3710LNTN	Vdet-IC	3.7V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N37MA	-	VDD3710MNTN	Vdet-IC	3.7V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N37SA	-	VDD3710SNTN	Vdet-IC	3.7V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N38	-	BFG590	Si-npn	UHF, 20V, 200mA, 400mW, B=60..250, 5GHz	SOT-143	24t6	-	5b	Phi
N381A	-	VDA3810NTN	Vdet-IC	3.8V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N38LA	-	VDD3810LNTN	Vdet-IC	3.8V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N38MA	-	VDD3810MNTN	Vdet-IC	3.8V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N38SA	-	VDD3810SNTN	Vdet-IC	3.8V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N39	-	BFG505/X	Si-npn	UHF, 20V, 18mA, 150mW, B=120..250, 9GHz	SOT-143	26tc	-	5b	Phi
N391A	-	VDA3910NTN	Vdet-IC	3.9V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N39LA	-	VDD3910LNTN	Vdet-IC	3.9V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N39MA	-	VDD3910MNTN	Vdet-IC	3.9V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N39SA	-	VDD3910SNTN	Vdet-IC	3.9V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N4	-	AP8821N-54GI	Vdet-IC	5.4V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
N4	-	AP8821N-54GS	Vdet-IC	5.4V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
N4	-	AP8821N-54PI	Vdet-IC	5.4V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
N4	-	AP8821N-54PS	Vdet-IC	5.4V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
N4	-	BFG520W/X	Si-npn	UHF, 20V, 70mA, 300mW, B=60..250, 9GHz	SOT-343	26tc	-	5b	Phi
N4	-	R3111Q341A	Vdet-IC	3.4V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
N4	-	R3116Q311A	Vdet-IC	3.1V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
N4	-	RP104Q181C5	LVR-IC	LDO, 1.85V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
N4	-	XC6120N34N	Vdet-IC	3.4V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
N4	-	XC61CN3402N	Vdet-IC	3.4V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
N4	-	XC6223H141NR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
N401A	-	VDA4010NTN	Vdet-IC	4.0V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N40LA	-	VDD4010LNTN	Vdet-IC	4.0V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N40MA	-	VDD4010MNTN	Vdet-IC	4.0V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N40SA	-	VDD4010SNTN	Vdet-IC	4.0V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N411A	-	VDA4110NTN	Vdet-IC	4.1V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N41LA	-	VDD4110LNTN	Vdet-IC	4.1V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N41MA	-	VDD4110MNTN	Vdet-IC	4.1V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N41SA	-	VDD4110SNTN	Vdet-IC	4.1V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N42	-	BFG520/X	Si-npn	UHF, 20V, 70mA, 300mW, B=60..250, 9GHz	SOT-143	26tc	-	5b	Phi
N421A	-	VDA4210NTN	Vdet-IC	4.2V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N42LA	-	VDD4210LNTN	Vdet-IC	4.2V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N42MA	-	VDD4210MNTN	Vdet-IC	4.2V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N42SA	-	VDD4210SNTN	Vdet-IC	4.2V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N43	-	BFG540/X	Si-npn	UHF, 20V, 120mA, 400mW, B=60..250, 9GHz	SOT-143	26tc	-	5b	Phi
N43	-	BFG540X	Si-npn	UHF, 20V, 120mA, 400mW, B=60..250, 9GHz	SOT-143	26tc	-	5b	Phi
N431A	-	VDA4310NTN	Vdet-IC	4.3V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N43LA	-	VDD4310LNTN	Vdet-IC	4.3V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N43MA	-	VDD4310MNTN	Vdet-IC	4.3V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N43SA	-	VDD4310SNTN	Vdet-IC	4.3V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N44	-	BFG590/X	Si-npn	UHF, 20V, 200mA, 400mW, B=60..250, 5GHz	SOT-143	26tc	-	5b	Phi
N441A	-	VDA4410NTN	Vdet-IC	4.4V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N44LA	-	VDD4410LNTN	Vdet-IC	4.4V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N44MA	-	VDD4410MNTN	Vdet-IC	4.4V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N44SA	-	VDD4410SNTN	Vdet-IC	4.4V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N45	-	BFG505/XR	Si-npn	UHF, 20V, 18mA, 150mW, B=120..250, 9GHz	SOT-143R	26tu	-	5b	Phi
N451A	-	VDA4510NTN	Vdet-IC	4.5V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N45LA	-	VDD4510LNTN	Vdet-IC	4.5V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N45MA	-	VDD4510MNTN	Vdet-IC	4.5V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N45SA	-	VDD4510SNTN	Vdet-IC	4.5V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N461A	-	VDA4610NTN	Vdet-IC	4.6V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N46LA	-	VDD4610LNTN	Vdet-IC	4.6V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N46MA	-	VDD4610MNTN	Vdet-IC	4.6V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N46SA	-	VDD4610SNTN	Vdet-IC	4.6V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N471A	-	VDA4710NTN	Vdet-IC	4.7V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N47LA	-	VDD4710LNTN	Vdet-IC	4.7V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N47MA	-	VDD4710MNTN	Vdet-IC	4.7V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N47SA	-	VDD4710SNTN	Vdet-IC	4.7V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N48	-	BFG520/XR	Si-npn	UHF, 20V, 70mA, 300mW, B=60..250, 9GHz	SOT-143R	26tu	-	5b	Phi
N481A	-	VDA4810NTN	Vdet-IC	4.8V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N48LA	-	VDD4810LNTN	Vdet-IC	4.8V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N48MA	-	VDD4810MNTN	Vdet-IC	4.8V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N48SA	-	VDD4810SNTN	Vdet-IC	4.8V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N49	-	BFG540/XR	Si-npn	UHF, 20V, 120mA, 400mW, B=60..250, 9GHz	SOT-143R	26tu	-	5b	Phi
N49	-	BFG540XR	Si-npn	UHF, 20V, 120mA, 400mW, B=60..250, 9GHz	SOT-143R	26tu	-	5b	Phi
N491A	-	VDA4910NTN	Vdet-IC	4.9V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N49LA	-	VDD4910LNTN	Vdet-IC	4.9V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N49MA	-	VDD4910MNTN	Vdet-IC	4.9V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N49SA	-	VDD4910SNTN	Vdet-IC	4.9V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N4s	-	CFH400	PHEMT	GaAs, LN, UHF, 6.5V, 80mA, 150mW, 1.8GHz, 15.7dB	SOT-343	26fq	-	5h	Inf
N4s	-	CFH400T	PHEMT	GaAs, LN, UHF, 6.5V, 80mA, 150mW, 1.8GHz, 15.7dB	TSFP-4	42fq	-	5b	Inf
N5	-	AP8821N-55GI	Vdet-IC	5.5V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
N5	-	AP8821N-55GS	Vdet-IC	5.5V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
N5	-	AP8821N-55PI	Vdet-IC	5.5V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
N5	-	AP8821N-55PS	Vdet-IC	5.5V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
N5	-	BFG520W/XR	Si-npn	UHF, 20V, 70mA, 300mW, B=60..250, 9GHz	SOT-343R	26tu	-	5b	Phi
N5	-	R3111Q351A	Vdet-IC	3.5V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
N5	-	R3116Q321A	Vdet-IC	3.2V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
N5	-	RP104Q191C	LVR-IC	LDO, 1.9V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
N5	-	XC6120N35N	Vdet-IC	3.5V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
N5	-	XC61CN3502N	Vdet-IC	3.5V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
N5	-	XC6223H151NR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
N50	-	BFG590/XR	Si-npn	UHF, 20V, 200mA, 400mW, B=60..250, 5GHz	SOT-143R	26tu	-	5b	Phi
N501A	-	VDA5010NTN	Vdet-IC	5.0V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N50LA	-	VDD5010LNTN	Vdet-IC	5.0V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N50MA	-	VDD5010MNTN	Vdet-IC	5.0V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N50SA	-	VDD5010SNTN	Vdet-IC	5.0V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N511A	-	VDA5110NTN	Vdet-IC	5.1V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N51LA	-	VDD5110LNTN	Vdet-IC	5.1V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N51MA	-	VDD5110MNTN	Vdet-IC	5.1V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N51SA	-	VDD5110SNTN	Vdet-IC	5.1V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N521A	-	VDA5210NTN	Vdet-IC	5.2V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N52LA	-	VDD5210LNTN	Vdet-IC	5.2V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N52MA	-	VDD5210MNTN	Vdet-IC	5.2V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N52SA	-	VDD5210SNTN	Vdet-IC	5.2V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N531A	-	VDA5310NTN	Vdet-IC	5.3V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N53LA	-	VDD5310LNTN	Vdet-IC	5.3V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N53MA	-	VDD5310MNTN	Vdet-IC	5.3V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N53SA	-	VDD5310SNTN	Vdet-IC	5.3V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N541A	-	VDA5410NTN	Vdet-IC	5.4V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N54LA	-	VDD5410LNTN	Vdet-IC	5.4V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N54MA	-	VDD5410MNTN	Vdet-IC	5.4V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N54SA	-	VDD5410SNTN	Vdet-IC	5.4V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N551A	-	VDA5510NTN	Vdet-IC	5.5V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N55LA	-	VDD5510LNTN	Vdet-IC	5.5V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N55MA	-	VDD5510MNTN	Vdet-IC	5.5V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N55SA	-	VDD5510SNTN	Vdet-IC	5.5V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N561A	-	VDA5610NTN	Vdet-IC	5.6V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N56LA	-	VDD5610LNTN	Vdet-IC	5.6V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N56MA	-	VDD5610MNTN	Vdet-IC	5.6V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N56SA	-	VDD5610SNTN	Vdet-IC	5.6V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N571A	-	VDA5710NTN	Vdet-IC	5.7V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N57LA	-	VDD5710LNTN	Vdet-IC	5.7V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N57MA	-	VDD5710MNTN	Vdet-IC	5.7V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N57SA	-	VDD5710SNTN	Vdet-IC	5.7V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N581A	-	VDA5810NTN	Vdet-IC	5.8V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N58LA	-	VDD5810LNTN	Vdet-IC	5.8V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N58MA	-	VDD5810MNTN	Vdet-IC	5.8V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N58SA	-	VDD5810SNTN	Vdet-IC	5.8V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N591A	-	VDA5910NTN	Vdet-IC	5.9V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N59LA	-	VDD5910LNTN	Vdet-IC	5.9V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N59MA	-	VDD5910MNTN	Vdet-IC	5.9V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N59SA	-	VDD5910SNTN	Vdet-IC	5.9V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N6	-	AP8821N-56GI	Vdet-IC	5.6V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
N6	-	AP8821N-56GS	Vdet-IC	5.6V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
N6	-	AP8821N-56PI	Vdet-IC	5.6V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
N6	-	AP8821N-56PS	Vdet-IC	5.6V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
N6	-	BFG25AW	Si-npn	VHF/UHF-Amp, 8V, 6.5mA, 200mW, B>50..200, 5GHz	SOT-343	24t6	-	5b	Phi
N6	-	R3111Q361A	Vdet-IC	3.6V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
N6	-	R3116Q331A	Vdet-IC	3.3V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
N6	-	RP104Q201C	LVR-IC	LDO, 2.0V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
N6	-	XC6120N36N	Vdet-IC	3.6V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N6	-	XC61CN3602N	Vdet-IC	3.6V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
N6	-	XC6223H161NR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
N601A	-	VDA6010NTN	Vdet-IC	6.0V±1%, -Reset ODO	SON-4	59vdl	VD6	5e	Ans
N60LA	-	VDD6010LNTN	Vdet-IC	6.0V±1%, -Reset ODO, 80..400ms	SON-4	59vdl	VD6	5e	Ans
N60MA	-	VDD6010MNTN	Vdet-IC	6.0V±1%, -Reset ODO, 50..200ms	SON-4	59vdl	VD6	5e	Ans
N60SA	-	VDD6010SNTN	Vdet-IC	6.0V±1%, -Reset ODO, 10..50ms	SON-4	59vdl	VD6	5e	Ans
N7	-	AP8821N-57GI	Vdet-IC	5.7V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
N7	-	AP8821N-57GS	Vdet-IC	5.7V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
N7	-	AP8821N-57PI	Vdet-IC	5.7V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
N7	-	AP8821N-57PS	Vdet-IC	5.7V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
N7	-	BFG540W/X	Si-npn	UHF, 20V, 120mA, 400mW, B=60..250, 9GHz	SOT-343	26tc	-	5b	Phi
N7	-	R3111Q371A	Vdet-IC	3.7V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
N7	-	R3116Q341A	Vdet-IC	3.4V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
N7	-	RP104Q251C	LVR-IC	LDO, 2.5V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
N7	-	XC6120N37N	Vdet-IC	3.7V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
N7	-	XC61CN3702N	Vdet-IC	3.7V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
N7	-	XC6223H171NR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
N70	-	BFG10	Si-npn	VHF/UHF-Amp, 20V, 250mA, 400mW, B>25, 1.9GHz	SOT-143	24t6	-	5c	Phi
N71	-	BFG10/X	Si-npn	VHF/UHF-Amp, 20V, 250mA, 400mW, B>25, 1.9GHz	SOT-143	24tc	-	5c	Phi
N72	-	BFG11	Si-npn	VHF/UHF-Amp, 20V, 500mA, 400mW, B>25, 1.9GHz	SOT-143	24t6	-	5c	Phi
N72	-	BFG11W/X	Si-npn	VHF/UHF-Amp, 20V, 500mA, 400mW, B>25, 1.9GHz	SOT-343	24tc	-	5c	Phi
N73	-	BFG11/X	Si-npn	VHF/UHF-Amp, 20V, 500mA, 400mW, B>25, 1.9GHz	SOT-143	24tc	-	5b	Phi
N8	-	AP8821N-58GI	Vdet-IC	5.8V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
N8	-	AP8821N-58GS	Vdet-IC	5.8V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
N8	-	AP8821N-58PI	Vdet-IC	5.8V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
N8	-	AP8821N-58PS	Vdet-IC	5.8V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
N8	-	BFG540W/XR	Si-npn	UHF, 20V, 120mA, 400mW, B=60..250, 9GHz	SOT-343R	26tu	-	5b	Phi
N8	-	R3111Q381A	Vdet-IC	3.8V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
N8	-	R3116Q351A	Vdet-IC	3.5V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
N8	-	RP104Q261C	LVR-IC	LDO, 2.6V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
N8	-	XC6120N38N	Vdet-IC	3.8V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
N8	-	XC61CN3802N	Vdet-IC	3.8V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
N8	-	XC6223H181NR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
N8A	-	S-1323B15NB-N8ATF	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8A	-	S-1323B15PF-N8ATF	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8B	-	S-1323B16NB-N8BTF	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8B	-	S-1323B16PF-N8BTF	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8C	-	S-1323B17NB-N8CTF	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8C	-	S-1323B17PF-N8CTF	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8D	-	S-1323B18NB-N8DTF	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8D	-	S-1323B18PF-N8DTF	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8E	-	S-1323B19NB-N8ETF	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8E	-	S-1323B19PF-N8ETF	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8F	-	S-1323B20NB-N8FTF	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8F	-	S-1323B20PF-N8FTF	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8G	-	S-1323B21NB-N8GTF	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8G	-	S-1323B21PF-N8GTF	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8H	-	S-1323B22NB-N8HTF	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8H	-	S-1323B22PF-N8HTF	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8I	-	S-1323B23NB-N8ITF	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8I	-	S-1323B23PF-N8ITF	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8J	-	S-1323B24NB-N8JTF	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8J	-	S-1323B24PF-N8JTF	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8K	-	S-1323B25NB-N8KTF	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8K	-	S-1323B25PF-N8KTF	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8L	-	S-1323B26NB-N8LTF	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8L	-	S-1323B26PF-N8LTF	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8M	-	S-1323B27NB-N8MTF	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8M	-	S-1323B27PF-N8MTF	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8N	-	S-1323B28NB-N8NTF	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8N	-	S-1323B28PF-N8NTF	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8O	-	S-1323B29NB-N8OTF	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8O	-	S-1323B29PF-N8OTF	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8P	-	S-1323B30NB-N8PTF	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8P	-	S-1323B30PF-N8PTF	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8Q	-	S-1323B31NB-N8QTF	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8Q	-	S-1323B31PF-N8QTF	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8R	-	S-1323B32NB-N8RTF	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8R	-	S-1323B32PF-N8RTF	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8s	-	CFH800	PHEMT	GaAs, LN, UHF, 6.5V, 160mA, 350mW, 4GHz, 15.2dB	SOT-343	26fq	-	5h	Inf



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N8s	-	CFH800T	PHEMT	GaAs, LN, UHF, 6.5V, 160mA, 350mW, 4GHz, 15.2dB	TSFP-4	42fq	-	5b	Inf
N8S	-	S-1323B33NB-N8STF	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8S	-	S-1323B33PF-N8STF	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8T	-	S-1323B34NB-N8TTF	LVR-IC	LDO, 3.4V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8T	-	S-1323B34PF-N8TTF	LVR-IC	LDO, 3.4V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8U	-	S-1323B35NB-N8UTF	LVR-IC	LDO, 3.5V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8U	-	S-1323B35PF-N8UTF	LVR-IC	LDO, 3.5V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8V	-	S-1323B36NB-N8VTF	LVR-IC	LDO, 3.6V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8V	-	S-1323B36PF-N8VTF	LVR-IC	LDO, 3.6V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8W	-	S-1323B37NB-N8WTF	LVR-IC	LDO, 3.7V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8W	-	S-1323B37PF-N8WTF	LVR-IC	LDO, 3.7V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8X	-	S-1323B38NB-N8XTF	LVR-IC	LDO, 3.8V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8X	-	S-1323B38PF-N8XTF	LVR-IC	LDO, 3.8V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8Y	-	S-1323B39NB-N8YTF	LVR-IC	LDO, 3.9V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8Y	-	S-1323B39PF-N8YTF	LVR-IC	LDO, 3.9V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N8Z	-	S-1323B40NB-N8ZTF	LVR-IC	LDO, 4.0V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N8Z	-	S-1323B40PF-N8ZTF	LVR-IC	LDO, 4.0V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9	-	AP8821N-59GI	Vdet-IC	5.9V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
N9	-	AP8821N-59GS	Vdet-IC	5.9V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
N9	-	AP8821N-59PI	Vdet-IC	5.9V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
N9	-	AP8821N-59PS	Vdet-IC	5.9V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
N9	-	BFG540W	Si-npn	UHF, 20V, 120mA, 400mW, B=60..250, 9GHz	SOT-343	24t6	-	5b	Phi
N9	-	R3111Q391A	Vdet-IC	3.9V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
N9	-	R3116Q361A	Vdet-IC	3.6V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
N9	-	RP104Q271C	LVR-IC	LDO, 2.7V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
N9	-	XC6120N39N	Vdet-IC	3.9V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
N9	-	XC61CN3902N	Vdet-IC	3.9V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
N9	-	XC6223H191NR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
N9A	-	S-1323B41NB-N9ATF	LVR-IC	LDO, 4.1V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N9A	-	S-1323B41PF-N9ATF	LVR-IC	LDO, 4.1V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9B	-	S-1323B42NB-N9BTF	LVR-IC	LDO, 4.2V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N9B	-	S-1323B42PF-N9BTF	LVR-IC	LDO, 4.2V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9C	-	S-1323B43NB-N9CTF	LVR-IC	LDO, 4.3V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N9C	-	S-1323B43PF-N9CTF	LVR-IC	LDO, 4.3V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9D	-	S-1323B44NB-N9DTF	LVR-IC	LDO, 4.4V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N9D	-	S-1323B44PF-N9DTF	LVR-IC	LDO, 4.4V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9E	-	S-1323B45NB-N9ETF	LVR-IC	LDO, 4.5V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N9E	-	S-1323B45PF-N9ETF	LVR-IC	LDO, 4.5V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9F	-	S-1323B46NB-N9FTF	LVR-IC	LDO, 4.6V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N9F	-	S-1323B46PF-N9FTF	LVR-IC	LDO, 4.6V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9G	-	S-1323B47NB-N9GTF	LVR-IC	LDO, 4.7V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N9G	-	S-1323B47PF-N9GTF	LVR-IC	LDO, 4.7V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9H	-	S-1323B48NB-N9HTF	LVR-IC	LDO, 4.8V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N9H	-	S-1323B48PF-N9HTF	LVR-IC	LDO, 4.8V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9I	-	S-1323B49NB-N9ITF	LVR-IC	LDO, 4.9V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N9I	-	S-1323B49PF-N9ITF	LVR-IC	LDO, 4.9V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9J	-	S-1323B50NB-N9JTF	LVR-IC	LDO, 5.0V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N9J	-	S-1323B50PF-N9JTF	LVR-IC	LDO, 5.0V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9K	-	S-1323B51NB-N9KTF	LVR-IC	LDO, 5.1V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N9K	-	S-1323B51PF-N9KTF	LVR-IC	LDO, 5.1V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9L	-	S-1323B52NB-N9LTF	LVR-IC	LDO, 5.2V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N9L	-	S-1323B52PF-N9LTF	LVR-IC	LDO, 5.2V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9M	-	S-1323B53NB-N9MTF	LVR-IC	LDO, 5.3V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N9M	-	S-1323B53PF-N9MTF	LVR-IC	LDO, 5.3V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9N	-	S-1323B54NB-N9NTF	LVR-IC	LDO, 5.4V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N9N	-	S-1323B54PF-N9NTF	LVR-IC	LDO, 5.4V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9O	-	S-1323B55NB-N9OTF	LVR-IC	LDO, 5.5V±1.0%, 150mA, +CE	SC-82AB	26vm	VR4	5c	Sii
N9O	-	S-1323B55PF-N9OTF	LVR-IC	LDO, 5.5V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9P	-	S-1323B1JPF-N9PTF	LVR-IC	LDO, 1.85V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
N9Q	-	S-1323B2JPF-N9QTF	LVR-IC	LDO, 2.85V±1.0%, 150mA, +CE	SNT-4A	42g6	VR4	5e	Sii
na	-	PT7M6246NLC4	Vdet-IC	4.6V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
na	gb	PT7M6246NLC4E	Vdet-IC	4.6V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
NA	-	BF1105WR	n-MOSFET	Dual gate, VHF, UHF, 7V, 30mA, 200mW	SOT-343R	26fm	-	5c	Phi
NA	-	CFY35-20	n-FET	GaAs, LN, UHF, 6V, 60mA, 250mW, 12GHz, 1.9dB	MW-4	25fp	-	5b	Inf
NA	-	RP130Q301D	LVR-IC	LDO, LN, +CE, CL, 3V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
NA	-	XC6120N40N	Vdet-IC	4V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
NA	-	XC6127C16DNR	Vdet-IC	1.6V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NA	-	XC6223H201NR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
NAp	-	BF1105R	n-MOSFET	Dual gate, VHF, UHF, 7V, 30mA, 200mW	SOT-143R	26fm	-	5c	Phi
nb	-	PT7M6247CLC4	Vdet-IC	4.7V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
nb	gb	PT7M6247CLC4E	Vdet-IC	4.7V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
NB	-	BF1109WR	n-MOSFET	Dual gate, VHF, UHF, 11V, 30mA, 200mW	SOT-343R	26fm	-	5c	Phi
NB	-	CFY35-23	n-FET	GaAs, LN, UHF, 6V, 60mA, 250mW, 12GHz, 2.2dB	MW-4	25fp	-	5b	Inf
NB	-	RP130Q311D	LVR-IC	LDO, LN, +CE, CL, 3.1V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
NB	-	XC6120N41N	Vdet-IC	4.1V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
NB	-	XC6127C18DNR	Vdet-IC	1.8V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NB	-	XC6223H211NR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
NBp	-	BF1109R	n-MOSFET	Dual gate, VHF, UHF, 11V, 30mA, 200mW	SOT-143R	26fm	-	5c	Phi
nc	-	PT7M6247CHC4	Vdet-IC	4.7V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
nc	gb	PT7M6247CHC4E	Vdet-IC	4.7V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
NC	-	RP130Q321D	LVR-IC	LDO, LN, +CE, CL, 3.2V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
NC	-	XC6120N42N	Vdet-IC	4.2V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
NC	-	XC6127C20DNR	Vdet-IC	2.0V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NC	-	XC6223H221NR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
NCs	-	BF2040	n-MOSFET	Dual gate, UHF, 14V, 40mA, 200mW, >1GHz	SOT-143	24fd	-	5h	Sie
NCs	-	BF2040W	n-MOSFET	Dual gate, UHF, 14V, 40mA, 200mW, >1GHz	SOT-343	26fm	-	5h	Sie
nd	-	PT7M6247NLC4	Vdet-IC	4.7V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
nd	gb	PT7M6247NLC4E	Vdet-IC	4.7V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
ND	-	RP130Q331D	LVR-IC	LDO, LN, +CE, CL, 3.3V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
ND	-	XC6120N43N	Vdet-IC	4.3V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
ND	-	XC6127C22DNR	Vdet-IC	2.2V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
ND	-	XC6223H231NR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
NDs	-	BF2000	n-MOSFET	Dual gate, UHF, 12V, 30mA, 200mW, 1GHz	SOT-143	24fd	-	5h	Sie
NDs	-	BF2000W	n-MOSFET	Dual gate, UHF, 12V, 30mA, 200mW, 1GHz	SOT-343	26fm	-	5h	Sie
NDs	-	BF2030	n-MOSFET	Dual gate, UHF, 8V, 40mA, 200mW, >1GHz	SOT-143	24fd	-	5h	Inf
NDs	-	BF2030R	n-MOSFET	Dual gate, UHF, 8V, 40mA, 200mW, >1GHz	SOT-143R	26fm	-	5h	Inf
NDs	-	BF2030W	n-MOSFET	Dual gate, UHF, 8V, 40mA, 200mW, >1GHz	SOT-343	26fm	-	5h	Inf
ne	-	PT7M6248CLC4	Vdet-IC	4.8V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
ne	gb	PT7M6248CLC4E	Vdet-IC	4.8V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
NE	-	RP130Q341D	LVR-IC	LDO, LN, +CE, CL, 3.4V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
NE	-	XC6120N44N	Vdet-IC	4.4V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
NE	-	XC6127C24DNR	Vdet-IC	2.4V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NE	-	XC6223H241NR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
NEp	-	BF1105	n-MOSFET	Dual gate, VHF, UHF, 7V, 30mA, 200mW	SOT-143	24fd	-	5c	Phi
NEs	-	BF2030	n-MOSFET	Dual gate, UHF, 14V, 40mA, 200mW, >1GHz	SOT-143	24fd	-	5h	Sie
NEs	-	BF2030W	n-MOSFET	Dual gate, UHF, 14V, 40mA, 200mW, >1GHz	SOT-343	26fm	-	5h	Sie
nf	-	PT7M6248CHC4	Vdet-IC	4.8V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
nf	gb	PT7M6248CHC4E	Vdet-IC	4.8V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
NF	-	R1114Q151B	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
NF	-	RP130Q351D	LVR-IC	LDO, LN, +CE, CL, 3.5V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
NF	-	XC6120N45N	Vdet-IC	4.5V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
NF	-	XC6127C26DNR	Vdet-IC	2.6V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NF	-	XC6223H251NR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
NFp	-	BF1109	n-MOSFET	Dual gate, VHF, UHF, 11V, 30mA, 200mW	SOT-143	24fd	-	5c	Phi
NFs	-	BF2040	n-MOSFET	Dual gate, UHF, 8V, 40mA, 200mW, >1GHz	SOT-143	24fd	-	5h	Inf
NFs	-	BF2040R	n-MOSFET	Dual gate, UHF, 8V, 40mA, 200mW, >1GHz	SOT-143R	26fm	-	5h	Inf
NFs	-	BF2040W	n-MOSFET	Dual gate, UHF, 8V, 40mA, 200mW, >1GHz	SOT-343	26fm	-	5h	Inf
ng	-	PT7M6248NLC4	Vdet-IC	4.8V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
ng	gb	PT7M6248NLC4E	Vdet-IC	4.8V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
NG	-	R1114Q161B	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
NG	-	RP130Q361D	LVR-IC	LDO, LN, +CE, CL, 3.6V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
nh	-	PT7M6249CLC4	Vdet-IC	4.9V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
nh	gb	PT7M6249CLC4E	Vdet-IC	4.9V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
NH	-	R1114Q171B	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
NH	-	RP130Q371D	LVR-IC	LDO, LN, +CE, CL, 3.7V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
NH	-	XC6120N46N	Vdet-IC	4.6V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
NH	-	XC6127C28DNR	Vdet-IC	2.8V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NH	-	XC6223H261NR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
ni	-	PT7M6249CHC4	Vdet-IC	4.9V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
ni	gb	PT7M6249CHC4E	Vdet-IC	4.9V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
NI-	-	3SK191	n-MOSFET	GaAs, Dual gate, UHF, 12V, Idss>10mA	SOT-143	26fm	-	5c	Ren
nj	-	PT7M6249NLC4	Vdet-IC	4.9V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
nj	gb	PT7M6249NLC4E	Vdet-IC	4.9V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
NJ	-	3SK248	n-MOSFET	Dual gate, 10V, 100mA, Up<1.5V	SOT-143	26fm	-	5b	San
NJ	-	R1114Q181B	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
NJ	-	RP130Q381D	LVR-IC	LDO, LN, +CE, CL, 3.8V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
nk	-	PT7M6250CLC4	Vdet-IC	5.0V±1.5%, -Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
nk	gb	PT7M6250CLC4E	Vdet-IC	5.0V±1.5%, -Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
NK	-	R1114Q191B	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
NK	-	RP130Q391D	LVR-IC	LDO, LN, +CE, CL, 3.9V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NK	-	XC6120N47N	Vdet-IC	4.7V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
NK	-	XC6127C30DNR	Vdet-IC	3.0V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NK	-	XC6223H271NR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
nl	-	PT7M6250CHC4	Vdet-IC	5.0V±1.5%, +Reset PPO	SC-70-4	23vdl	VD7	5g	Pti
nl	gb	PT7M6250CHC4E	Vdet-IC	5.0V±1.5%, +Reset PPO, Lead free	SC-70-4	23vdl	VD7	5g	Pti
NL	-	XC6120N48N	Vdet-IC	4.8V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
NL	-	XC6127C32DNR	Vdet-IC	3.2V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NL	-	XC6223H281NR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
nm	-	PT7M6250NLC4	Vdet-IC	5.0V±1.5%, -Reset ODO	SC-70-4	23vdl	VD6	5g	Pti
nm	gb	PT7M6250NLC4E	Vdet-IC	5.0V±1.5%, -Reset ODO, Lead free	SC-70-4	23vdl	VD6	5g	Pti
NM	-	ASM811LEUSF	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
NM	-	XC6120N49N	Vdet-IC	4.9V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
NM	-	XC6127C34DNR	Vdet-IC	3.4V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NM	-	XC6223H291NR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
NN	-	ASM811MEUSF	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
NN	-	XC6109N30AN	Vdet-IC	3.0V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
NN	-	XC6119N40ANR	Vdet-IC	4.0V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
NN	-	XC6120N50N	Vdet-IC	5V±2%, N-ch, +Reset ODO	SSOT-24	26yu	VD6	5a	Tor
NN	-	XC6127C36DNR	Vdet-IC	3.6V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NO	-	AAT3526ICX-2.32-200	Vdet-IC	2.32V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5i	Ant
NO	-	ASM811JEUSF	Vdet-IC	4.0V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
NP	-	ASM811TEUSF	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
NP	-	XC6109N31AN	Vdet-IC	3.1V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
NP	-	XC6119N41ANR	Vdet-IC	4.1V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
NP	-	XC6127C38DNR	Vdet-IC	3.8V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NP	-	XC6225B082NR-G	LVR-IC	LDO, 0.8V±30mV, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
NQ	-	ASM811SEUSF	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
NR	-	ASM811REUSF	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
NR	-	XC6109N32AN	Vdet-IC	3.2V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
NR	-	XC6119N42ANR	Vdet-IC	4.2V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
NR	-	XC6127C40DNR	Vdet-IC	4.0V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NR	-	XC6225B08ANR-G	LVR-IC	LDO, 0.85V±30mV, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
NS	-	ASM812LEUSF	Vdet-IC	4.63V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
NS	-	XC6109N33AN	Vdet-IC	3.3V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
NS	-	XC6119N43ANR	Vdet-IC	4.3V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
NS	-	XC6127C42DNR	Vdet-IC	4.2V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NS	-	XC6225B092NR-G	LVR-IC	LDO, 0.9V±30mV, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
NT	-	ASM812MEUSF	Vdet-IC	4.38V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
NT	-	XC6109N34AN	Vdet-IC	3.4V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
NT	-	XC6119N44ANR	Vdet-IC	4.4V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
NT	-	XC6127C44DNR	Vdet-IC	4.4V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NT	-	XC6225B09ANR-G	LVR-IC	LDO, 0.95V±30mV, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
NU	-	ASM812JEUSF	Vdet-IC	4.0V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
NU	-	XC6109N35AN	Vdet-IC	3.5V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
NU	-	XC6119N45ANR	Vdet-IC	4.5V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
NU	-	XC6127C46DNR	Vdet-IC	4.6V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NU	-	XC6225B102NR-G	LVR-IC	LDO, 1.0V±30mV, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
NV	-	ASM812TEUSF	Vdet-IC	3.08V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
NV	-	XC6109N36AN	Vdet-IC	3.6V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
NV	-	XC6119N46ANR	Vdet-IC	4.6V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
NV	-	XC6127C48DNR	Vdet-IC	4.8V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NV	-	XC6225B10ANR-G	LVR-IC	LDO, 1.05V±30mV, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
NW	-	ASM812SEUSF	Vdet-IC	2.93V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
NX	-	ASM812REUSF	Vdet-IC	2.63V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
NX	-	XC6109N37AN	Vdet-IC	3.7V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
NX	-	XC6119N47ANR	Vdet-IC	4.7V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
NX	-	XC6127C50DNR	Vdet-IC	5.0V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NX	-	XC6225B112NR-G	LVR-IC	LDO, 1.1V±30mV, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
NY	-	XC6109N38AN	Vdet-IC	3.8V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
NY	-	XC6119N48ANR	Vdet-IC	4.8V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
NY	-	XC6127C52DNR	Vdet-IC	5.2V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NY	-	XC6225B11ANR-G	LVR-IC	LDO, 1.15V±30mV, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
NYs	-	BF1012S	n-MOSFET	Dual gate, 16V, 25mA, 200mW, Nf=1.4dB, Gf=26mΩ	SOT-143	24fd	-	5b	Inf
NZ	-	BF1105SW	n-MOSFET	Dual gate, VHF, UHF, 7V, 30mA, 200mW	SOT-343	26fm	-	5h	Inf
NZ	-	XC6109N39AN	Vdet-IC	3.9V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
NZ	-	XC6119N49ANR	Vdet-IC	4.9V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
NZ	-	XC6127C54DNR	Vdet-IC	5.4V±0.8%, -Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
NZ	-	XC6225B122NR-G	LVR-IC	LDO, 1.2V±30mV, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
NZs	-	BF1105S	n-MOSFET	Dual gate, VHF, UHF, 7V, 30mA, 200mW	SOT-143	24fd	-	5h	Inf
NZs	-	BF1105SR	n-MOSFET	Dual gate, VHF, UHF, 7V, 30mA, 200mW	SOT-143R	26fm	-	5h	Inf

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P	gc	ELM7535NCB	Vdet-IC	3.5V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
P	gd	ELM7535CCB	Vdet-IC	3.5V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
P0	-	AP8821N-60GI	Vdet-IC	6.0V±2%, -Reset ODO, Halogen-free	SC-82	26vdl	VD6	5ga	Anw
P0	-	AP8821N-60GS	Vdet-IC	6.0V±2%, -Reset ODO, Halogen-free	SC-82S	90vdl	VD6	5ga	Anw
P0	-	AP8821N-60PI	Vdet-IC	6.0V±2%, -Reset ODO	SC-82	26vdl	VD6	5g	Anw
P0	-	AP8821N-60PS	Vdet-IC	6.0V±2%, -Reset ODO	SC-82S	90vdl	VD6	5g	Anw
P0	-	BFG505W/XR	Si-npn	UHF, 20V, 18mA, 150mW, B=120..250, 9GHz	SOT-343R	26tu	-	5b	Phi
P0	-	R3111Q401A	Vdet-IC	4V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
P0	-	R3116Q371A	Vdet-IC	3.7V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
P0	-	RP104Q281C	LVR-IC	LDO, 2.8V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
P0	-	XC61CN4002N	Vdet-IC	4.0V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
P0	-	XC6221B411NR	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
P0	-	XC6224B08BNR	LVR-IC	LDO, 0.85V±20mV, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
P1	-	BFG121W	Si-npn	VHF/UHF-Amp, 15V, 500mA, 600mW, B=40..100, 1.9GHz	SOT-343R	26tu	-	5c	Phi
P1	-	BFG21W	Si-npn	VHF/UHF-Amp, 15V, 500mA, 600mW, B=40..100, 18GHz	SOT-343R	26tm	-	5b	Phi
P1	-	R3111Q411A	Vdet-IC	4.1V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
P1	-	R3116Q381A	Vdet-IC	3.8V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
P1	-	RP104Q281C5	LVR-IC	LDO, 2.85V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
P1	-	XC61CN4102N	Vdet-IC	4.1V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
P1	-	XC6221B421NR	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
P1	-	XC6224B09BNR	LVR-IC	LDO, 0.95V±20mV, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
P1	-	XC6504A111NR-G	LVR-IC	LDO, 1.1V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
P2	-	R3111Q421A	Vdet-IC	4.2V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
P2	-	R3116Q391A	Vdet-IC	3.9V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
P2	-	RP104Q291C	LVR-IC	LDO, 2.9V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
P2	-	XC61CN4202N	Vdet-IC	4.2V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
P2	-	XC6221B431NR	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
P2	-	XC6224B10BNR	LVR-IC	LDO, 1.05V±20mV, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
P2	-	XC6504A121NR-G	LVR-IC	LDO, 1.2V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
P3	-	R3111Q431A	Vdet-IC	4.3V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
P3	-	R3116Q401A	Vdet-IC	4V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
P3	-	RP104Q301C	LVR-IC	LDO, 3.0V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
P3	-	XC61CN4302N	Vdet-IC	4.3V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
P3	-	XC6221B441NR	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
P3	-	XC6224B11BNR	LVR-IC	LDO, 1.15V±20mV, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
P3	-	XC6504A131NR-G	LVR-IC	LDO, 1.3V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
P4	-	R3111Q441A	Vdet-IC	4.4V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
P4	-	R3116Q411A	Vdet-IC	4.1V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
P4	-	RP104Q321C	LVR-IC	LDO, 3.2V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
P4	-	XC61CN4402N	Vdet-IC	4.4V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
P4	-	XC6221B451NR	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
P4	-	XC6224B12BNR	LVR-IC	LDO, 1.25V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
P4	-	XC6504A141NR-G	LVR-IC	LDO, 1.4V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
P5	-	R3111Q451A	Vdet-IC	4.5V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
P5	-	R3116Q421A	Vdet-IC	4.2V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
P5	-	RP104Q331C	LVR-IC	LDO, 3.3V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
P5	-	XC61CN4502N	Vdet-IC	4.5V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
P5	-	XC6221B461NR	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
P5	-	XC6224B13BNR	LVR-IC	LDO, 1.25V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
P5	-	XC6504A151NR-G	LVR-IC	LDO, 1.5V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
P6	-	R3111Q461A	Vdet-IC	4.6V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
P6	-	R3116Q431A	Vdet-IC	4.3V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
P6	-	RP104Q311C	LVR-IC	LDO, 3.1V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
P6	-	XC61CN4602N	Vdet-IC	4.6V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
P6	-	XC6221B471NR	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
P6	-	XC6224B14BNR	LVR-IC	LDO, 1.45V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
P6	-	XC6504A161NR-G	LVR-IC	LDO, 1.6V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
P7	-	R3111Q471A	Vdet-IC	4.7V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
P7	-	R3116Q441A	Vdet-IC	4.4V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
P7	-	RP104Q241C	LVR-IC	LDO, 2.4V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
P7	-	XC61CN4702N	Vdet-IC	4.7V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
P7	-	XC6221B481NR	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
P7	-	XC6224B15BNR	LVR-IC	LDO, 1.55V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
P7	-	XC6504A171NR-G	LVR-IC	LDO, 1.7V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
P8	-	BFG92A	Si-npn	VHF/UHF-Amp, 20V, 30mA, 200mW, B=50..150, 6GHz	SOT-143	24t6	-	5c	Phi
P8	-	R3111Q481A	Vdet-IC	4.8V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
P8	-	R3116Q451A	Vdet-IC	4.5V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
P8	-	RP104Q221C	LVR-IC	LDO, 2.2V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
P8	-	XC61CN4802N	Vdet-IC	4.8V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
P8	-	XC6218P09N	LVR-IC	LDO, 0.9V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P8	-	XC6224B16BNR	LVR-IC	LDO, 1.65V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
P8	-	XC6504A181NR-G	LVR-IC	LDO, 1.8V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
P9	-	R3111Q491A	Vdet-IC	4.9V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
P9	-	R3116Q461A	Vdet-IC	4.6V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
P9	-	RP104Q231C	LVR-IC	LDO, 2.3V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
P9	-	XC61CN4902N	Vdet-IC	4.9V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
P9	-	XC6218P10N	LVR-IC	LDO, 1.0V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
P9	-	XC6224B17BNR	LVR-IC	LDO, 1.75V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
P9	-	XC6504A191NR-G	LVR-IC	LDO, 1.9V±20mV, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PA	-	R1114Q201B	LVR-IC	LDO, Low noise, 2.0V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
PA	-	RP130Q401D	LVR-IC	LDO, LN, +CE, CL, 4V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
PA	-	XC6127C16ENR	Vdet-IC	1.6V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PA	-	XC6218P11N	LVR-IC	LDO, 1.1V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PA	-	XC6224B18BNR	LVR-IC	LDO, 1.85V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
PA	-	XC6504A201NR-G	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PAs	-	BFP136W	Si-npn	UHF, DECT, 20V, 0.15A, 5.5GHz	SOT-343	26tu	-	5b	Sie
PB	-	R1114Q211B	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
PB	-	RP130Q411D	LVR-IC	LDO, LN, +CE, CL, 4.1V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
PB	-	XC6127C18ENR	Vdet-IC	1.8V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PB	-	XC6218P12N	LVR-IC	LDO, 1.2V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PB	-	XC6224B19BNR	LVR-IC	LDO, 1.95V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
PB	-	XC6504A211NR-G	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PC	-	R1114Q221B	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
PC	-	RP130Q421D	LVR-IC	LDO, LN, +CE, CL, 4.2V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
PC	-	XC6127C20ENR	Vdet-IC	2.0V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PC	-	XC6218P13N	LVR-IC	LDO, 1.3V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PC	-	XC6224B251NR	LVR-IC	LDO, 2.5V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
PC	-	XC6504A221NR-G	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PD	-	R1114Q231B	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
PD	-	RP130Q431D	LVR-IC	LDO, LN, +CE, CL, 4.3V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
PD	-	XC6127C22ENR	Vdet-IC	2.2V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PD	-	XC6218P14N	LVR-IC	LDO, 1.4V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PD	-	XC6223G301NR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
PD	-	XC6504A231NR-G	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PE	-	R1114Q241B	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
PE	-	RP130Q441D	LVR-IC	LDO, LN, +CE, CL, 4.4V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
PE	-	XC6127C24ENR	Vdet-IC	2.4V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PE	-	XC6218P15N	LVR-IC	LDO, 1.5V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PE	-	XC6223G311NR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
PE	-	XC6504A241NR-G	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PF	-	R1114Q251B	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
PF	-	RP130Q451D	LVR-IC	LDO, LN, +CE, CL, 4.5V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
PF	-	XC6127C26ENR	Vdet-IC	2.6V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PF	-	XC6218P16N	LVR-IC	LDO, 1.6V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PF	-	XC6223G321NR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
PF	-	XC6504A251NR-G	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PG	-	R1114Q261B	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
PG	-	RP130Q461D	LVR-IC	LDO, LN, +CE, CL, 4.6V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
PH	-	R1114Q271B	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
PH	-	RP130Q471D	LVR-IC	LDO, LN, +CE, CL, 4.7V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
PH	-	XC6127C28ENR	Vdet-IC	2.8V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PH	-	XC6218P17N	LVR-IC	LDO, 1.7V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PH	-	XC6223G331NR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
PH	-	XC6504A261NR-G	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PJ	-	R1114Q281B	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
PJ	-	RP130Q481D	LVR-IC	LDO, LN, +CE, CL, 4.8V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
PK	-	R1114Q291B	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
PK	-	RP130Q491D	LVR-IC	LDO, LN, +CE, CL, 4.9V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
PK	-	XC6127C30ENR	Vdet-IC	3.0V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PK	-	XC6218P18N	LVR-IC	LDO, 1.8V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PK	-	XC6223G341NR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
PK	-	XC6504A271NR-G	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PK2	-	S-1000C41-I4T1G	Vdet-IC	4.1V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PK2	-	S-1000C41-N4T1	Vdet-IC	4.1V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PK3	-	S-1000C42-I4T1G	Vdet-IC	4.2V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PK3	-	S-1000C42-N4T1	Vdet-IC	4.2V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PK4	-	S-1000C43-I4T1G	Vdet-IC	4.3V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PK4	-	S-1000C43-N4T1	Vdet-IC	4.3V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PK5	-	S-1000C44-I4T1G	Vdet-IC	4.4V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PK5	-	S-1000C44-N4T1	Vdet-IC	4.4V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PK6	-	S-1000C45-I4T1G	Vdet-IC	4.5V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PK6	-	S-1000C45-N4T1	Vdet-IC	4.5V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PK7	-	S-1000C46-I4T1G	Vdet-IC	4.6V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PK7	-	S-1000C46-N4T1	Vdet-IC	4.6V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKA	-	S-1000C15-I4T1G	Vdet-IC	1.5V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKA	-	S-1000C15-N4T1	Vdet-IC	1.5V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKB	-	S-1000C16-I4T1G	Vdet-IC	1.6V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKB	-	S-1000C16-N4T1	Vdet-IC	1.6V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKC	-	S-1000C17-I4T1G	Vdet-IC	1.7V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKC	-	S-1000C17-N4T1	Vdet-IC	1.7V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKD	-	S-1000C18-I4T1G	Vdet-IC	1.8V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKD	-	S-1000C18-N4T1	Vdet-IC	1.8V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKE	-	S-1000C19-I4T1G	Vdet-IC	1.9V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKE	-	S-1000C19-N4T1	Vdet-IC	1.9V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKF	-	S-1000C20-I4T1G	Vdet-IC	2.0V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKF	-	S-1000C20-N4T1	Vdet-IC	2.0V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKG	-	S-1000C21-I4T1G	Vdet-IC	2.1V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKG	-	S-1000C21-N4T1	Vdet-IC	2.1V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKH	-	S-1000C22-I4T1G	Vdet-IC	2.2V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKH	-	S-1000C22-N4T1	Vdet-IC	2.2V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKI	-	S-1000C23-I4T1G	Vdet-IC	2.3V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKI	-	S-1000C23-N4T1	Vdet-IC	2.3V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKJ	-	S-1000C24-I4T1G	Vdet-IC	2.4V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKJ	-	S-1000C24-N4T1	Vdet-IC	2.4V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKK	-	S-1000C25-I4T1G	Vdet-IC	2.5V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKK	-	S-1000C25-N4T1	Vdet-IC	2.5V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKL	-	S-1000C26-I4T1G	Vdet-IC	2.6V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKL	-	S-1000C26-N4T1	Vdet-IC	2.6V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKM	-	S-1000C27-I4T1G	Vdet-IC	2.7V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKM	-	S-1000C27-N4T1	Vdet-IC	2.7V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKN	-	S-1000C28-I4T1G	Vdet-IC	2.8V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKN	-	S-1000C28-N4T1	Vdet-IC	2.8V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKO	-	S-1000C29-I4T1G	Vdet-IC	2.9V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKO	-	S-1000C29-N4T1	Vdet-IC	2.9V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKP	-	S-1000C30-I4T1G	Vdet-IC	3.0V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKP	-	S-1000C30-N4T1	Vdet-IC	3.0V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKQ	-	S-1000C31-I4T1G	Vdet-IC	3.1V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKQ	-	S-1000C31-N4T1	Vdet-IC	3.1V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKR	-	S-1000C32-I4T1G	Vdet-IC	3.2V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKR	-	S-1000C32-N4T1	Vdet-IC	3.2V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKS	-	S-1000C33-I4T1G	Vdet-IC	3.3V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKS	-	S-1000C33-N4T1	Vdet-IC	3.3V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKT	-	S-1000C34-I4T1G	Vdet-IC	3.4V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKT	-	S-1000C34-N4T1	Vdet-IC	3.4V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKU	-	S-1000C35-I4T1G	Vdet-IC	3.5V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKU	-	S-1000C35-N4T1	Vdet-IC	3.5V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKV	-	S-1000C36-I4T1G	Vdet-IC	3.6V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKV	-	S-1000C36-N4T1	Vdet-IC	3.6V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKW	-	S-1000C37-I4T1G	Vdet-IC	3.7V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKW	-	S-1000C37-N4T1	Vdet-IC	3.7V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKX	-	S-1000C38-I4T1G	Vdet-IC	3.8V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKX	-	S-1000C38-N4T1	Vdet-IC	3.8V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKY	-	S-1000C39-I4T1G	Vdet-IC	3.9V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKY	-	S-1000C39-N4T1	Vdet-IC	3.9V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PKZ	-	S-1000C40-I4T1G	Vdet-IC	4.0V±1.0%, -Reset PPO	SNT-4A	42vdj	VD7	5e	Sii
PKZ	-	S-1000C40-N4T1	Vdet-IC	4.0V±1.0%, -Reset PPO	SC-82AB	26vdl	VD7	5b	Sii
PL	-	XC6127C32ENR	Vdet-IC	3.2V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PL	-	XC6218P19N	LVR-IC	LDO, 1.9V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PL	-	XC6223G351NR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
PL	-	XC6504A281NR-G	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PL2	-	S-1000N41-I4T1G	Vdet-IC	4.1V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PL2	-	S-1000N41-N4T1	Vdet-IC	4.1V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PL3	-	S-1000N42-I4T1G	Vdet-IC	4.2V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PL3	-	S-1000N42-N4T1	Vdet-IC	4.2V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PL4	-	S-1000N43-I4T1G	Vdet-IC	4.3V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PL4	-	S-1000N43-N4T1	Vdet-IC	4.3V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PL5	-	S-1000N44-I4T1G	Vdet-IC	4.4V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PL5	-	S-1000N44-N4T1	Vdet-IC	4.4V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PL6	-	S-1000N45-I4T1G	Vdet-IC	4.5V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PL6	-	S-1000N45-N4T1	Vdet-IC	4.5V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PL7	-	S-1000N46-I4T1G	Vdet-IC	4.6V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PL7	-	S-1000N46-N4T1	Vdet-IC	4.6V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLA	-	S-1000N15-I4T1G	Vdet-IC	1.5V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLA	-	S-1000N15-N4T1	Vdet-IC	1.5V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLB	-	S-1000N16-I4T1G	Vdet-IC	1.6V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLB	-	S-1000N16-N4T1	Vdet-IC	1.6V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLC	-	S-1000N17-I4T1G	Vdet-IC	1.7V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLC	-	S-1000N17-N4T1	Vdet-IC	1.7V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLD	-	S-1000N18-I4T1G	Vdet-IC	1.8V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLD	-	S-1000N18-N4T1	Vdet-IC	1.8V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLE	-	S-1000N19-I4T1G	Vdet-IC	1.9V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLE	-	S-1000N19-N4T1	Vdet-IC	1.9V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLF	-	S-1000N20-I4T1G	Vdet-IC	2.0V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLF	-	S-1000N20-N4T1	Vdet-IC	2.0V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLG	-	S-1000N21-I4T1G	Vdet-IC	2.1V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLG	-	S-1000N21-N4T1	Vdet-IC	2.1V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLH	-	S-1000N22-I4T1G	Vdet-IC	2.2V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLH	-	S-1000N22-N4T1	Vdet-IC	2.2V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLI	-	S-1000N23-I4T1G	Vdet-IC	2.3V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLI	-	S-1000N23-N4T1	Vdet-IC	2.3V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLJ	-	S-1000N24-I4T1G	Vdet-IC	2.4V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLJ	-	S-1000N24-N4T1	Vdet-IC	2.4V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLK	-	S-1000N25-I4T1G	Vdet-IC	2.5V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLK	-	S-1000N25-N4T1	Vdet-IC	2.5V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLL	-	S-1000N26-I4T1G	Vdet-IC	2.6V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLL	-	S-1000N26-N4T1	Vdet-IC	2.6V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLM	-	S-1000N27-I4T1G	Vdet-IC	2.7V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLM	-	S-1000N27-N4T1	Vdet-IC	2.7V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLN	-	S-1000N28-I4T1G	Vdet-IC	2.8V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLN	-	S-1000N28-N4T1	Vdet-IC	2.8V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLO	-	S-1000N29-I4T1G	Vdet-IC	2.9V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLO	-	S-1000N29-N4T1	Vdet-IC	2.9V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLP	-	S-1000N30-I4T1G	Vdet-IC	3.0V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLP	-	S-1000N30-N4T1	Vdet-IC	3.0V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLQ	-	S-1000N31-I4T1G	Vdet-IC	3.1V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLQ	-	S-1000N31-N4T1	Vdet-IC	3.1V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLR	-	S-1000N32-I4T1G	Vdet-IC	3.2V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLR	-	S-1000N32-N4T1	Vdet-IC	3.2V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLS	-	S-1000N33-I4T1G	Vdet-IC	3.3V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLS	-	S-1000N33-N4T1	Vdet-IC	3.3V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLT	-	S-1000N34-I4T1G	Vdet-IC	3.4V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLT	-	S-1000N34-N4T1	Vdet-IC	3.4V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLU	-	S-1000N35-I4T1G	Vdet-IC	3.5V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLU	-	S-1000N35-N4T1	Vdet-IC	3.5V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLV	-	S-1000N36-I4T1G	Vdet-IC	3.6V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLV	-	S-1000N36-N4T1	Vdet-IC	3.6V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLW	-	S-1000N37-I4T1G	Vdet-IC	3.7V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLW	-	S-1000N37-N4T1	Vdet-IC	3.7V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLX	-	S-1000N38-I4T1G	Vdet-IC	3.8V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLX	-	S-1000N38-N4T1	Vdet-IC	3.8V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLY	-	S-1000N39-I4T1G	Vdet-IC	3.9V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLY	-	S-1000N39-N4T1	Vdet-IC	3.9V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PLZ	-	S-1000N40-I4T1G	Vdet-IC	4.0V±1.0%, -Reset ODO	SNT-4A	42vdj	VD6	5e	Sii
PLZ	-	S-1000N40-N4T1	Vdet-IC	4.0V±1.0%, -Reset ODO	SC-82AB	26vdl	VD6	5b	Sii
PM	-	XC6127C34ENR	Vdet-IC	3.4V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PM	-	XC6218P20N	LVR-IC	LDO, 2.0V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PM	-	XC6223G361NR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
PM	-	XC6504A291NR-G	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PN	-	XC6109N40AN	Vdet-IC	4.0V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
PN	-	XC6119N50ANR	Vdet-IC	5.0V±2%, -Reset ODO	SSOT-24	26gh	VD1	5a	Tor
PN	-	XC6127C36ENR	Vdet-IC	3.6V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PN	-	XC6218P21N	LVR-IC	LDO, 2.1V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PN	-	XC6504A301NR-G	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PP	-	XC6109N41AN	Vdet-IC	4.1V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
PP	-	XC6127C38ENR	Vdet-IC	3.8V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PP	-	XC6218P22N	LVR-IC	LDO, 2.2V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PP	-	XC6223G371NR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
PP	-	XC6504A311NR-G	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PR	-	XC6109N42AN	Vdet-IC	4.2V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
PR	-	XC6127C40ENR	Vdet-IC	4.0V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PR	-	XC6218P23N	LVR-IC	LDO, 2.3V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PR	-	XC6223G381NR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
PR	-	XC6504A321NR-G	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PS	-	XC6109N43AN	Vdet-IC	4.3V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
PS	-	XC6127C42ENR	Vdet-IC	4.2V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PS	-	XC6218P24N	LVR-IC	LDO, 2.4V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PS	-	XC6223G391NR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
PS	-	XC6504A331NR-G	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PT	-	XC6109N44AN	Vdet-IC	4.4V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
PT	-	XC6127C44ENR	Vdet-IC	4.4V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PT	-	XC6218P25N	LVR-IC	LDO, 2.5V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PT	-	XC6223G401NR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
PT	-	XC6504A341NR-G	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PTs	-	BAR64-07	PIN-diode	Dual, Sw, RF-Att, 150V, 100mA, Vf<1.1V(50mA), < 0.35pF	SOT-143	24ce	-	5h	Inf
PU	-	XC6109N45AN	Vdet-IC	4.5V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
PU	-	XC6127C46ENR	Vdet-IC	4.6V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PU	-	XC6218P26N	LVR-IC	LDO, 2.6V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PU	-	XC6224B261NR	LVR-IC	LDO, 2.6V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
PU	-	XC6504A351NR-G	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PV	-	XC6109N46AN	Vdet-IC	4.6V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
PV	-	XC6127C48ENR	Vdet-IC	4.8V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PV	-	XC6218P27N	LVR-IC	LDO, 2.7V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PV	-	XC6224B271NR	LVR-IC	LDO, 2.7V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
PV	-	XC6504A361NR-G	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PX	-	XC6109N47AN	Vdet-IC	4.7V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
PX	-	XC6127C50ENR	Vdet-IC	5.0V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PX	-	XC6218P28N	LVR-IC	LDO, 2.8V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PX	-	XC6224B281NR	LVR-IC	LDO, 2.8V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
PX	-	XC6504A371NR-G	LVR-IC	LDO, 3.7V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PY	-	XC6109N48AN	Vdet-IC	4.8V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
PY	-	XC6127C52ENR	Vdet-IC	5.2V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PY	-	XC6218P29N	LVR-IC	LDO, 2.9V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PY	-	XC6224B291NR	LVR-IC	LDO, 2.9V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
PY	-	XC6504A381NR-G	LVR-IC	LDO, 3.8V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
PZ	-	XC6109N49AN	Vdet-IC	4.9V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
PZ	-	XC6127C54ENR	Vdet-IC	5.4V±0.8%, -Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
PZ	-	XC6218P30N	LVR-IC	LDO, 3.0V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
PZ	-	XC6224B301NR	LVR-IC	LDO, 3.0V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
PZ	-	XC6504A391NR-G	LVR-IC	LDO, 3.9V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
Q	gc	ELM7536NCB	Vdet-IC	3.6V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
Q	gd	ELM7536CCB	Vdet-IC	3.6V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
Q0	-	R3116Q471A	Vdet-IC	4.7V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
Q1	-	R3116Q481A	Vdet-IC	4.8V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
Q2	-	R3116Q491A	Vdet-IC	4.9V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
Q3	-	R3116Q501A	Vdet-IC	5V±0.8%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
QA	-	R1114Q301B	LVR-IC	LDO, Low noise, 3.0V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
QA	-	RP130Q501D	LVR-IC	LDO, LN, +CE, CL, 5V±1%, 150mA	SC-82AB	26vn	VR4	5m	Ric
QB	-	R1114Q311B	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
QC	-	R1114Q321B	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
QD	-	R1114Q331B	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
QE	-	R1114Q341B	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
QF	-	R1114Q351B	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
QG	-	R1114Q361B	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
QH	-	R1114Q371B	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
QJ	-	R1114Q381B	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
QK	-	R1114Q391B	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
QV	-	1SV298	PIN-diode	Triple, VHF/UHF Atten., 50V, 0.05A, 0.23pF, 7Ω(100MHz)	SOT-143	26do	-	5b	San
R	gc	ELM7537NCB	Vdet-IC	3.7V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
R	gd	ELM7537CCB	Vdet-IC	3.7V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
R0	-	R3111Q501A	Vdet-IC	5V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
R0	-	R3116Q071C	Vdet-IC	0.7V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
R0	-	RP104Q121D	LVR-IC	LDO, 1.2V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
R0	-	XC61CN5002N	Vdet-IC	5.0V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
R0	-	XC6218P31N	LVR-IC	LDO, 3.1V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
R0	-	XC6504A401NR-G	LVR-IC	LDO, 4.0V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
R1	-	R3111Q511A	Vdet-IC	5.1V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
R1	-	R3116Q081C	Vdet-IC	0.8V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
R1	-	RP104Q131D	LVR-IC	LDO, 1.3V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
R1	-	XC61CN5102N	Vdet-IC	5.1V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
R1	-	XC6218P32N	LVR-IC	LDO, 3.2V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R1	-	XC6504A411NR-G	LVR-IC	LDO, 4.1V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
R2	-	R3111Q521A	Vdet-IC	5.2V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
R2	-	R3116Q091C	Vdet-IC	0.9V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
R2	-	RP104Q151D	LVR-IC	LDO, 1.5V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
R2	-	XC61CN5202N	Vdet-IC	5.2V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
R2	-	XC6218P33N	LVR-IC	LDO, 3.3V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
R2	-	XC6504A421NR-G	LVR-IC	LDO, 4.2V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
R26	-	2SC4093-26	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=50..100, 7GHz	SOT-143	26tu	-	5c	Nec
R26	-	2SC4093RB-F	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=50..100, 7GHz	SOT-143	26tu	-	5c	Nec
R26	-	2SC5011-EB	Si-npn	UHF, LN, 20V, 100mA, 150mW, B=50..100, 6.5Hz	SOT-143	25tu	-	5b	Nec
R26	-	NE85618-EB	Si-npn	UHF, LN, 20V, 100mA, 150mW, B=50..100, 6.5Hz	SOT-143	25tu	-	5c	Cel
R26	-	NE85639-26	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=50..100, 7GHz	SOT-143	24tu	-	5c	Cel
R26	-	NE85639R-F	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=50..100, 7GHz	SOT-143	26tu	-	5c	Cel
R27	-	2SC4093-27	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=80..160, 7GHz	SOT-143	26tu	-	5c	Nec
R27	-	2SC4093RB-G	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=80..160, 7GHz	SOT-143	26tu	-	5c	Nec
R27	-	2SC5011-FB	Si-npn	UHF, LN, 20V, 100mA, 150mW, B=80..160, 6.5Hz	SOT-143	25tu	-	5b	Nec
R27	-	NE85618-FB	Si-npn	UHF, LN, 20V, 100mA, 150mW, B=80..160, 6.5Hz	SOT-143	25tu	-	5c	Cel
R27	-	NE85639-27	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=80..160, 7GHz	SOT-143	24tu	-	5c	Cel
R27	-	NE85639R-G	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=80..160, 7GHz	SOT-143	26tu	-	5c	Cel
R28	-	2SC4093-28	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=125..250, 7GHz	SOT-143	26tu	-	5c	Nec
R28	-	2SC4093RB-H	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=125..250, 7GHz	SOT-143	26tu	-	5c	Nec
R28	-	2SC5011-GB	Si-npn	UHF, LN, 20V, 100mA, 150mW, B=125..250, 6.5Hz	SOT-143	25tu	-	5b	Nec
R28	-	NE85618-GB	Si-npn	UHF, LN, 20V, 100mA, 150mW, B=125..250, 6.5Hz	SOT-143	25tu	-	5c	Cel
R28	-	NE85639-28	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=125..250, 7GHz	SOT-143	24tu	-	5c	Cel
R28	-	NE85639R-H	Si-npn	VHF/UHF, CATV, 20V, 100mA, 200mW, B=125..250, 7GHz	SOT-143	24tu	-	5c	Nec
R2s	-	BFP620	SiGeC-npn	RF, 7.5V, 80mA, 185mW, 65GHz, B=110..270	SOT-343	26t1	-	5h	Inf
R2s	-	BFP620F	SiGeC-npn	RF, 7.5V, 80mA, 185mW, 65GHz, B=110..270	TSFP-4	42t1	-	5b	Inf
R3	-	R3111Q531A	Vdet-IC	5.3V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
R3	-	R3116Q101C	Vdet-IC	1V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
R3	-	RP104Q181D	LVR-IC	LDO, 1.8V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
R3	-	XC61CN5302N	Vdet-IC	5.3V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
R3	-	XC6218P34N	LVR-IC	LDO, 3.4V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
R3	-	XC6504A431NR-G	LVR-IC	LDO, 4.3V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
R36	-	2SC4094-36	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=50..100, 9GHz	SOT-143	26tu	-	5c	Nec
R36	-	2SC4094RC-F	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=50..100, 9GHz	SOT-143	26tu	-	5c	Nec
R36	-	2SC5012-EB	Si-npn	HF, WB, LN, 20V, 65mA, 150mW, B=50..100, 9GHz	SOT-343	25tu	-	5b	Nec
R36	-	NE68118-EB	Si-npn	HF, WB, LN, 20V, 65mA, 150mW, B=50..100, 9GHz	SOT-343	25tu	-	5c	Cel
R36	-	NE68139-36	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=50..100, 9GHz	SOT-143	26tu	-	5c	Cel
R36	-	NE68139R-F	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=50..100, 9GHz	SOT-143	26tu	-	5c	Cel
R37	-	2SC4094-37	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=80..160, 9GHz	SOT-143	26tu	-	5c	Nec
R37	-	2SC4094RC-G	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=80..160, 9GHz	SOT-143	26tu	-	5c	Nec
R37	-	2SC5012-FB	Si-npn	HF, WB, LN, 20V, 65mA, 150mW, B=80..160, 9GHz	SOT-343	25tu	-	5b	Nec
R37	-	NE68118-FB	Si-npn	HF, WB, LN, 20V, 65mA, 150mW, B=80..160, 9GHz	SOT-343	25tu	-	5c	Cel
R37	-	NE68139-37	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=80..160, 9GHz	SOT-143	26tu	-	5c	Cel
R37	-	NE68139R-G	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=80..160, 9GHz	SOT-143	26tu	-	5c	Cel
R38	-	2SC4094-38	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=125..250, 9GHz	SOT-143	26tu	-	5c	Nec
R38	-	2SC4094RC-H	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=125..250, 9GHz	SOT-143	26tu	-	5c	Nec
R38	-	2SC5012-GB	Si-npn	HF, WB, LN, 20V, 65mA, 150mW, B=125..250, 9GHz	SOT-343	25tu	-	5b	Nec
R38	-	NE68139-38	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=125..250, 9GHz	SOT-143	26tu	-	5c	Cel
R38	-	NE68139R-H	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=125..250, 9GHz	SOT-143	26tu	-	5c	Cel
R4	-	2SC4092-4	Si-npn	UHF, LN, 25V, 70mA, 200mW, B=40..120, 6GHz	SOT-143	26tu	-	5c	Nec
R4	-	2SC4092-D	Si-npn	UHF, LN, 25V, 70mA, 200mW, B=40..120, 6GHz	SOT-143	26tu	-	5c	Nec
R4	-	NE02139-4	Si-npn	UHF, LN, 25V, 70mA, 200mW, B=40..120, 4.5Hz	SOT-143	26tu	-	5c	Cel
R4	-	NE02139-D	Si-npn	UHF, LN, 25V, 70mA, 200mW, B=40..120, 4.5Hz	SOT-143	26tu	-	5c	Cel
R4	-	R3111Q541A	Vdet-IC	5.4V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
R4	-	R3116Q111C	Vdet-IC	1.1V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
R4	-	RP104Q181D5	LVR-IC	LDO, 1.85V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
R4	-	XC61CN5402N	Vdet-IC	5.4V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
R4	-	XC6218P35N	LVR-IC	LDO, 3.5V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
R4	-	XC6504A441NR-G	LVR-IC	LDO, 4.4V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
R46	-	2SC4095-46	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=50..100, 10GHz	SOT-143	26tu	-	5c	Nec
R46	-	2SC4095RD-F	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=80..160, 10GHz	SOT-143	26tu	-	5c	Nec
R46	-	2SC5013-EB	Si-npn	HF, WB, LN, 20V, 35mA, 150mW, B=50..100, 10GHz	SOT-143	26t8	-	5b	Nec
R47	-	2SC4095-47	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=80..160, 10GHz	SOT-143	26tu	-	5c	Nec
R47	-	2SC4095RD-G	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=80..160, 10GHz	SOT-143	26tu	-	5c	Nec
R47	-	2SC5013-FB	Si-npn	HF, WB, LN, 20V, 35mA, 150mW, B=80..160, 10GHz	SOT-143	26t8	-	5b	Nec
R48	-	2SC4095-48	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=80..160.10GHz	SOT-143	26tu	-	5c	Nec
R48	-	2SC4095RF-H	Si-npn	VHF/UHF, 20V, 35mA, 200mW, B=80..160.10GHz	SOT-143	26tu	-	5c	Nec
R48	-	2SC5013-GB	Si-npn	HF, WB, LN, 20V, 35mA, 150mW, B=125..250, 10GHz	SOT-143	26t8	-	5b	Nec
R4s	-	BFP640	SiGeC-npn	RF, 13V, 50mA, 200mW, 40GHz, B=110..270	SOT-343	26t1	-	5h	Inf



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R4s	-	BFP640F	SiGeC-npn	RF, 13V, 50mA, 200mW, 40GHz, B=110..270	TSFP-4	42t1	-	5b	Inf
R5	-	2SC4092-5	Si-npn	UHF, LN, 25V, 70mA, 200mW, B=100..200, 6GHz	SOT-143	26tu	-	5c	Nec
R5	-	2SC4092-E	Si-npn	UHF, LN, 25V, 70mA, 200mW, B=100..200, 6GHz	SOT-143	26tu	-	5c	Nec
R5	-	NE02139-5	Si-npn	UHF, LN, 25V, 70mA, 200mW, B=100..200, 4.5Hz	SOT-143	26tu	-	5c	Cel
R5	-	NE02139-E	Si-npn	UHF, LN, 25V, 70mA, 200mW, B=100..200, 4.5Hz	SOT-143	26tu	-	5c	Cel
R5	-	R3111Q551A	Vdet-IC	5.5V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
R5	-	R3116Q121C	Vdet-IC	1.2V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
R5	-	RP104Q191D	LVR-IC	LDO, 1.9V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
R5	-	XC61CN5502N	Vdet-IC	5.5V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
R5	-	XC6218P36N	LVR-IC	LDO, 3.6V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
R5	-	XC6504A451NR-G	LVR-IC	LDO, 4.5V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
R6	-	R3111Q561A	Vdet-IC	5.6V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
R6	-	R3116Q131C	Vdet-IC	1.3V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
R6	-	RP104Q201D	LVR-IC	LDO, 2.0V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
R6	-	XC61CN5602N	Vdet-IC	5.6V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
R6	-	XC6218P37N	LVR-IC	LDO, 3.7V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
R6	-	XC6504A461NR-G	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
R66	-	2SC4091-Q	Si-npn	UHF, 15V, 5mA, 50mW, B=50..100, 4GHz	SOT-143	26tc	-	5b	Nec
R67	-	2SC4091-R	Si-npn	UHF, 15V, 5mA, 50mW, B=80..160, 4GHz	SOT-143	26tc	-	5b	Nec
R68	-	2SC4091-S	Si-npn	UHF, 15V, 5mA, 50mW, B=15..250, 4GHz	SOT-143	26tc	-	5b	Nec
R7	-	R3111Q571A	Vdet-IC	5.7V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
R7	-	R3116Q141C	Vdet-IC	1.4V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
R7	-	RP104Q251D	LVR-IC	LDO, 2.5V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
R7	-	XC61CN5702N	Vdet-IC	5.7V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
R7	-	XC6218P38N	LVR-IC	LDO, 3.8V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
R7	-	XC6504A471NR-G	LVR-IC	LDO, 4.7V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
R7s	-	BFP740	SiGeC-npn	RF, 13V, 30mA, 160mW, 42GHz, B=160..400	SOT-343	26t1	-	5h	Inf
R7s	-	BFP740F	SiGeC-npn	RF, 13V, 30mA, 160mW, 42GHz, B=160..400	TSFP-4	42t1	-	5b	Inf
R8	-	AP8822C-08GI	Vdet-IC	0.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
R8	-	AP8822C-08GS	Vdet-IC	0.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
R8	-	AP8822C-08PI	Vdet-IC	0.8V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
R8	-	AP8822C-08PS	Vdet-IC	0.8V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
R8	-	BFG93A	Si-npn	VHF/UHF-Amp, 20V, 35mA, 300mW, B=90, 6GHz	SOT-143	24t6	-	5c	Phi
R8	-	R3111Q581A	Vdet-IC	5.8V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
R8	-	R3116Q151C	Vdet-IC	1.5V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
R8	-	RP104Q261D	LVR-IC	LDO, 2.6V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
R8	-	XC61CN5802N	Vdet-IC	5.8V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
R8	-	XC6218P39N	LVR-IC	LDO, 3.9V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
R8	-	XC6504A481NR-G	LVR-IC	LDO, 4.8V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
R9	-	AP8822C-09GI	Vdet-IC	0.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
R9	-	AP8822C-09GS	Vdet-IC	0.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
R9	-	AP8822C-09PI	Vdet-IC	0.9V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
R9	-	AP8822C-09PS	Vdet-IC	0.9V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
R9	-	R3111Q591A	Vdet-IC	5.9V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
R9	-	R3116Q161C	Vdet-IC	1.6V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
R9	-	RP104Q271D	LVR-IC	LDO, 2.7V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
R9	-	XC61CN5902N	Vdet-IC	5.9V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
R9	-	XC6218P40N	LVR-IC	LDO, 4.0V±2%, 200mA	SSOT-24	26yr	VR1	5a	Tor
R9	-	XC6504A491NR-G	LVR-IC	LDO, 4.9V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
R9s	-	BFP720	SiGeC-npn	RF, 15V, 25mA, 100mW, 45GHz, B=160..400	SOT-343	26t1	-	5h	Inf
R9s	-	BFP720F	SiGeC-npn	RF, 15V, 25mA, 100mW, 45GHz, B=160..400	TSFP-4	42t1	-	5b	Inf
RA	-	R1114Q401B	LVR-IC	LDO, Low noise, 4.0V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
RA	-	XC6127C16FNR	Vdet-IC	1.6V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RA	-	XC6501C121NR-G	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RA	-	XC6504A501NR-G	LVR-IC	LDO, 5.0V±1%, 150mA, +CE	SSOT-24	26vn	VR4	5k	Tor
RB	-	R1114Q281B5	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
RB	-	XC6127C18FNR	Vdet-IC	1.8V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RB	-	XC6501C12ANR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RC	-	XC6127C20FNR	Vdet-IC	2.0V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RC	-	XC6501C131NR-G	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RCs	-	BFP193	Si-npn	UHF, 20V, 80mA, 580mW, B=50..200, 8GHz	SOT-143	24tc	-	5b	Inf
RCs	-	BFP193W	Si-npn	UHF, 20V, 80mA, 580mW, B=50..200, 8GHz	SOT-343	24tc	-	5b	Sie
RD	-	BFP180W	Si-npn	UHF, 10V, 4mA, 30mW, B=30..200, 6.2GHz	SOT-343	24tc	-	5h	Inf
RD	-	XC6127C22FNR	Vdet-IC	2.2V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RD	-	XC6501C13ANR-G	LVR-IC	LDO, 1.35V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RDs	-	BFP180	Si-npn	UHF, 10V, 4mA, 30mW, B=30..200, 6.2GHz	SOT-143	24tc	-	5b	Sie
RDs	-	BFP180W	Si-npn	UHF, 10V, 4mA, 30mW, B=30..200, 6.2GHz	SOT-343	24tc	-	5b	Sie
RE	-	XC6127C24FNR	Vdet-IC	2.4V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RE	-	XC6501C141NR-G	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
REs	-	BFP280	Si-npn	UHF, 10V, 10mA, 80mW, B=30..200, 7GHz	SOT-143	24tc	-	5b	Sie



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
REs	-	BFP280W	Si-npn	UHF, 10V, 10mA, 80mW, B=30..200, 7GHz	SOT-343	24tc	-	5b	Sie
RF	-	BFP181W	Si-npn	UHF, 20V, 20mA, 175mW, B=50..200, 8GHz	SOT-343	24tc	-	5h	Inf
RF	-	XC6127C26FNR	Vdet-IC	2.6V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RF	-	XC6501C14ANR-G	LVR-IC	LDO, 1.45V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RFs	-	BFP181	Si-npn	UHF, 20V, 20mA, 175mW, B=50..200, 8GHz	SOT-143	24tc	-	5b	Sie
RFs	-	BFP181R	Si-npn	UHF, 20V, 20mA, 175mW, B=50..200, 8GHz	SOT-143	24tc	-	5b	Sie
RFs	-	BFP181W	Si-npn	UHF, 20V, 20mA, 175mW, B=50..200, 8GHz	SOT-343	24tc	-	5b	Sie
RG	-	BFP182W	Si-npn	UHF, 20V, 35mA, 250mW, B=50..200, >8GHz	SOT-343	24tc	-	5h	Inf
RGs	-	BFP182	Si-npn	UHF, 20V, 35mA, 250mW, B=50..200, >8GHz	SOT-143	24tc	-	5b	Sie
RGs	-	BFP182R	Si-npn	UHF, 20V, 35mA, 250mW, B=50..200, >8GHz	SOT-143	26tu	-	5b	Sie
RGs	-	BFP182W	Si-npn	UHF, 20V, 35mA, 250mW, B=50..200, >8GHz	SOT-343	24tc	-	5b	Sie
RH	-	XC6127C28FNR	Vdet-IC	2.8V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RH	-	XC6501C151NR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RHs	-	BFP183	Si-npn	UHF, 20V, 65mA, 450mW, B=50..200, 8GHz	SOT-143	24tc	-	5b	Sie
RHs	-	BFP183R	Si-npn	UHF, 20V, 65mA, 450mW, B=50..200, 8GHz	SOT-143	26tu	-	5b	Sie
RHs	-	BFP183W	Si-npn	UHF, 20V, 65mA, 450mW, B=50..200, 8GHz	SOT-343	24tc	-	5b	Sie
RJ4	-	3SK263-4	n-MOSFET	VHF FM-Tuner, Dual gate, 15V, 30mA, 200mW, Idsx=2.5..6mA	CP4	26fm	-	5b	San
RJ5	-	3SK263-5	n-MOSFET	VHF FM-Tuner, Dual gate, 15V, 30mA, 200mW, Idsx=5..12mA	CP4	26fm	-	5b	San
RJ6	-	3SK263-6	n-MOSFET	VHF FM-Tuner, Dual gate, 15V, 30mA, 200mW, Idsx=10..24mA	CP4	26fm	-	5b	San
RK	-	XC6127C30FNR	Vdet-IC	3.0V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RK	-	XC6501C15ANR-G	LVR-IC	LDO, 1.55V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RKs	-	BFP194	Si-npn	UHF, 20V, 100mA, 700mW, B=20..150, 5GHz	SOT-143	24tc	-	5b	Sie
RL	-	XC6127C32FNR	Vdet-IC	3.2V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RL	-	XC6501C161NR-G	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RLs	-	BFP196	Si-npn	UHF-A, 20V, 100mA, 700mW, B=50..200, 7.5GHz	SOT-143	24t1	-	5b	Sie
RM	-	XC6127C34FNR	Vdet-IC	3.4V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RM	-	XC6501C16ANR-G	LVR-IC	LDO, 1.65V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RN	-	XC6109N50AN	Vdet-IC	5.0V±2%, +Reset ODO	SSOT-24	26rp	VD1	5c	Tor
RN	-	XC6127C36FNR	Vdet-IC	3.6V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RN	-	XC6224B20BNR	LVR-IC	LDO, 2.05V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RN	-	XC6501C171NR-G	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RP	-	XC6127C38FNR	Vdet-IC	3.8V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RP	-	XC6224B21BNR	LVR-IC	LDO, 2.15V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RP	-	XC6501C17ANR-G	LVR-IC	LDO, 1.75V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RR	-	XC6127C40FNR	Vdet-IC	4.0V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RR	-	XC6224B22BNR	LVR-IC	LDO, 2.25V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RR	-	XC6501C181NR-G	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RS	-	XC6127C42FNR	Vdet-IC	4.2V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RS	-	XC6224B23BNR	LVR-IC	LDO, 2.25V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RS	-	XC6501C18ANR-G	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RT	-	XC6127C44FNR	Vdet-IC	4.4V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RT	-	XC6224B24BNR	LVR-IC	LDO, 2.45V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RT	-	XC6501C191NR-G	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RU	-	XC6127C46FNR	Vdet-IC	4.6V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RU	-	XC6224B25BNR	LVR-IC	LDO, 2.55V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RU	-	XC6501C19ANR-G	LVR-IC	LDO, 1.95V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RV	-	XC6127C48FNR	Vdet-IC	4.8V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RV	-	XC6224B26BNR	LVR-IC	LDO, 2.65V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RV	-	XC6501C201NR-G	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RX	-	XC6127C50FNR	Vdet-IC	5.0V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RX	-	XC6224B27BNR	LVR-IC	LDO, 2.75V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RX	-	XC6501C20ANR-G	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RY	-	2SC5534	Si-npn	UHF-S-Band, LN, 9V, 30mA, 150mW, B=90..200, 13GHz	SOT-343	26tu	-	5b	San
RY	-	XC6127C52FNR	Vdet-IC	5.2V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RY	-	XC6224B28BNR	LVR-IC	LDO, 2.85V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RY	-	XC6501C211NR-G	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RZ	-	XC6127C54FNR	Vdet-IC	5.4V±0.8%, +Reset PPO, -MR, Rt=50ms	SSOT-24	26cr	VD5	5j	Tor
RZ	-	XC6224B29BNR	LVR-IC	LDO, 2.95V±1.5%, 150mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
RZ	-	XC6501C21ANR-G	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
S	gc	ELM7538NCB	Vdet-IC	3.8V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
S	gd	ELM7538CCB	Vdet-IC	3.8V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
S0	-	R3111Q601A	Vdet-IC	6V±2%, -Reset PPO	SC-82AB	26vdl	VD7	5m	Ric
S0	-	R3116Q171C	Vdet-IC	1.7V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
S0	-	RP104Q281D	LVR-IC	LDO, 2.8V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
S0	-	XC61CN6002N	Vdet-IC	6.0V±2%, +Reset ODO	SSOT-24	26vdl	VD6	5c	Tor
S0	-	XC6225B17ANR-G	LVR-IC	LDO, 1.75V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
S1	-	BFG310/XR	Si-npn	UHF, 15V, 10mA, 60mW, B=60..200, 14GHz	SOT-143R	26tu	-	5b	Phi
S1	-	R3116Q181C	Vdet-IC	1.8V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
S1	-	RP104Q281D5	LVR-IC	LDO, 2.85V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
S1	-	XC6225B182NR-G	LVR-IC	LDO, 1.8V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S1p	-	BFG310/XR	Si-npn	UHF, 15V, 10mA, 60mW, B=60..200, 14GHz	SOT-143R	26tu	-	5b	PhH
S1W	-	BFG310/XR	Si-npn	UHF, 15V, 10mA, 60mW, B=60..200, 14GHz	SOT-143R	26tu	-	5b	PhC
S2	-	R3116Q191C	Vdet-IC	1.9V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
S2	-	RP104Q291D	LVR-IC	LDO, 2.9V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
S2	-	XC6223C12BNR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
S2	-	XC6225B192NR-G	LVR-IC	LDO, 1.9V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
S3	-	R3116Q201C	Vdet-IC	2V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
S3	-	RP104Q301D	LVR-IC	LDO, 3.0V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
S3	-	XC6223C13BNR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
S3	-	XC6225B19ANR-G	LVR-IC	LDO, 1.95V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
S4	-	BBY62	C-diode	Dual, UHF-Tuning, 30V, 20mA, 1.6..16.5pF(28/1V)	SOT-143	24ce	-	5c	Phi
S4	-	R3116Q211C	Vdet-IC	2.1V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
S4	-	RP104Q321D	LVR-IC	LDO, 3.2V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
S4	-	XC6223C14BNR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
S4	-	XC6225B18ANR-G	LVR-IC	LDO, 1.85V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
S5	-	R3116Q221C	Vdet-IC	2.2V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
S5	-	RP104Q331D	LVR-IC	LDO, 3.3V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
S5	-	XC6223C15BNR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
S5	-	XC6225B202NR-G	LVR-IC	LDO, 2.0V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
S5s	-	BAT15-099	Si-diode	Dual, Schottky, DBS-mix, 4V, 100mA, <12GHz, <0.35pF	SOT-143	24ef	-	5h	Inf
S6	-	R3116Q231C	Vdet-IC	2.3V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
S6	-	RP104Q311D	LVR-IC	LDO, 3.1V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
S6	-	XC6223C16BNR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
S6	-	XC6225B20ANR-G	LVR-IC	LDO, 2.05V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
S6s	-	BAT15-099R	Si-diode	Quad, Schottky, DBS-mix, 4V, 100mA, <12GHz, <0.35pF	SOT-143	24	D3	5h	Inf
S7	-	R3116Q241C	Vdet-IC	2.4V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
S7	-	RP104Q241D	LVR-IC	LDO, 2.4V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
S7	-	XC6223C17BNR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
S7	-	XC6225B212NR-G	LVR-IC	LDO, 2.1V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
S8	-	R3116Q251C	Vdet-IC	2.5V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
S8	-	RP104Q221D	LVR-IC	LDO, 2.2V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
S8	-	XC6223C18BNR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
S8	-	XC6225B21ANR-G	LVR-IC	LDO, 2.15V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
S8s	-	BAT14-099R	Si-diode	Quad, Schottky, UHF-mix, 4V, 90mA, Vf<0.66V(10mA, <0.35pF	SOT-143	24	D3	5b	Sie
S9	-	BAT14-099	Si-diode	Dual, Schottky, UHF-mix, 4V, 90mA, Vf<0.66V(10mA, <0.35pF	SOT-143	24	D3	5b	Sie
S9	-	R3116Q261C	Vdet-IC	2.6V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
S9	-	RP104Q231D	LVR-IC	LDO, 2.3V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
S9	-	XC6223C19BNR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
S9	-	XC6225B222NR-G	LVR-IC	LDO, 2.2V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
SA	-	XC6127C16GNR	Vdet-IC	1.6V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SA	-	XC6223C20BNR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SA	-	XC6501C221NR-G	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SB	-	XC6127C18GNR	Vdet-IC	1.8V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SB	-	XC6223C21BNR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SB	-	XC6501C22ANR-G	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SC	-	XC6127C20GNR	Vdet-IC	2.0V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SC	-	XC6223C22BNR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SC	-	XC6501C231NR-G	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SD	-	XC6127C22GNR	Vdet-IC	2.2V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SD	-	XC6223C23BNR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SD	-	XC6501C23ANR-G	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SE	-	XC6127C24GNR	Vdet-IC	2.4V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SE	-	XC6223C24BNR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SE	-	XC6501C241NR-G	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
sf	-	PT7M7811JTB	Vdet-IC	4.0V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
sf	gh	PT7M7811JTBE	Vdet-IC	4.0V±1.5%, -Reset PPO, -MR, Lead free	SOT-143	24vdh	VD5	5g	Pti
SF	-	R1114Q151D	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
SF	-	XC6127C26GNR	Vdet-IC	2.6V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SF	-	XC6223C25BNR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SF	-	XC6501C24ANR-G	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SFQ	-	NCP304LSQ47T1	Vdet-IC	4.7V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SFR	-	NCP304LSQ46T1	Vdet-IC	4.6V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SFS	-	NCP304LSQ45T1	Vdet-IC	4.5V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SFU	-	NCP304LSQ42T1	Vdet-IC	4.2V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SFV	-	NCP304LSQ43T1	Vdet-IC	4.3V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SFY	-	NCP304LSQ40T1	Vdet-IC	4.0V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
sg	-	PT7M7812JTB	Vdet-IC	4.0V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
sg	gi	PT7M7812JTBE	Vdet-IC	4.0V±1.5%, +Reset PPO, -MR, Lead free	SOT-143	24vdh	VD5	5g	Pti
SG	-	R1114Q161D	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
SGA	-	NCP304LSQ38T1	Vdet-IC	3.8V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SGB	-	NCP304LSQ37T1	Vdet-IC	3.7V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SGG	-	NCP304LSQ33T1	Vdet-IC	3.3V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SGJ	-	NCP304LSQ30T1	Vdet-IC	3.0V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SGK	-	NCP304LSQ29T1	Vdet-IC	2.9V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SGN	-	NCP304LSQ27T1	Vdet-IC	2.7V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SGP	-	NCP304LSQ25T1	Vdet-IC	2.5V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SGR	-	NCP304LSQ23T1	Vdet-IC	2.3V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SGV	-	NCP304LSQ20T1	Vdet-IC	2.0V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SGX	-	NCP304LSQ18T1	Vdet-IC	1.8V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SH	-	R1114Q171D	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
SH	-	XC6127C28GNR	Vdet-IC	2.8V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SH	-	XC6223C26BNR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SH	-	XC6501C251NR-G	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SHG	-	NCP304LSQ09T1	Vdet-IC	0.9V±1.5%, -Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SHH	-	NCP305LSQ49T1	Vdet-IC	4.9V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SHJ	-	NCP305LSQ47T1	Vdet-IC	4.7V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SHL	-	NCP305LSQ45T1	Vdet-IC	4.5V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SHN	-	NCP305LSQ44T1	Vdet-IC	4.4V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SHR	-	NCP305LSQ40T1	Vdet-IC	4.0V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SHU	-	NCP305LSQ36T1	Vdet-IC	3.6V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SHV	-	NCP305LSQ37T1	Vdet-IC	3.7V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SHX	-	NCP305LSQ35T1	Vdet-IC	3.5V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SHY	-	NCP305LSQ34T1	Vdet-IC	3.4V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SHZ	-	NCP305LSQ33T1	Vdet-IC	3.3V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SIA	-	NCP305LSQ32T1	Vdet-IC	3.2V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SIB	-	NCP305LSQ31T1	Vdet-IC	3.1V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SIC	-	NCP305LSQ30T1	Vdet-IC	3.0V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SID	-	NCP305LSQ29T1	Vdet-IC	2.9V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SIE	-	NCP305LSQ28T1	Vdet-IC	2.8V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SIF	-	NCP305LSQ27T1	Vdet-IC	2.7V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SIH	-	NCP305LSQ25T1	Vdet-IC	2.5V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SII	-	NCP305LSQ24T1	Vdet-IC	2.4V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SIJ	-	NCP305LSQ23T1	Vdet-IC	2.3V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SIK	-	NCP305LSQ22T1	Vdet-IC	2.2V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SIN	-	NCP305LSQ20T1	Vdet-IC	2.0V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SIP	-	NCP305LSQ18T1	Vdet-IC	1.8V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SIQ	-	NCP305LSQ17T1	Vdet-IC	1.7V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SIR	-	NCP305LSQ16T1	Vdet-IC	1.6V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SIS	-	NCP305LSQ15T1	Vdet-IC	1.5V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SIX	-	NCP305LSQ11T1	Vdet-IC	1.1V±1.5%, -Reset ODO	SC-82AB	26vdl	VD6	5g	Ons
SIZ	-	NCP305LSQ09T1	Vdet-IC	0.9V±1.5%, -Reset PPO	SC-82AB	26vdl	VD6	5g	Ons
SJ	-	R1114Q181D	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
SJ5	-	3SK264-5	n-MOSFET	VHF-Tuner, Dual gate, 15V, 30mA, 200mW, Idsx=5..12mA	CP4	26fm	-	5b	San
SJ6	-	3SK264-6	n-MOSFET	VHF-Tuner, Dual gate, 15V, 30mA, 200mW, Idsx=10..24mA	CP4	26fm	-	5b	San
SK	-	R1114Q191D	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
SK	-	XC6127C30GNR	Vdet-IC	3.0V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SK	-	XC6223C27BNR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SK	-	XC6501C25ANR-G	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SL	-	XC6127C32GNR	Vdet-IC	3.2V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SL	-	XC6223C28BNR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SL	-	XC6501C261NR-G	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SM	-	ASM811LEUS	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
SM	-	XC6127C34GNR	Vdet-IC	3.4V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SM	-	XC6223C29BNR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SM	-	XC6501C26ANR-G	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SN	-	ASM811MEUS	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
SN	-	XC6127C36GNR	Vdet-IC	3.6V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SN	-	XC6223C30BNR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SN	-	XC6501C271NR-G	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SNQ	-	NCP304HSQ09T1	Vdet-IC	0.9V±1.5%, +Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SNZ	-	NCP304HSQ18T1	Vdet-IC	1.8V±1.5%, +Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SO	-	ASM811JEUS	Vdet-IC	4.0V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
SOB	-	NCP304HSQ20T1	Vdet-IC	2.0V±1.5%, +Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SOD	-	NCP304HSQ22T1	Vdet-IC	2.2V±1.5%, +Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SOI	-	NCP304HSQ27T1	Vdet-IC	2.7V±1.5%, +Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SOK	-	NCP304HSQ29T1	Vdet-IC	2.9V±1.5%, +Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SOL	-	NCP304HSQ30T1	Vdet-IC	3.0V±1.5%, +Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SP	-	ASM811TEUS	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
SP	-	XC6127C38GNR	Vdet-IC	3.8V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SP	-	XC6223C31BNR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SP	-	XC6501C27ANR-G	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SPA	-	NCP304HSQ45T1	Vdet-IC	4.5V±1.5%, +Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SPC	-	NCP304HSQ47T1	Vdet-IC	4.7V±1.5%, +Reset PPO	SC-82AB	26vdl	VD7	5g	Ons
SQ	-	ASM811SEUS	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
SR	-	ASM811REUS	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
SR	-	XC6127C40GNR	Vdet-IC	4.0V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SR	-	XC6223C32BNR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SR	-	XC6501C281NR-G	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SS	-	ASM812LEUS	Vdet-IC	4.63V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
SS	-	XC6127C42GNR	Vdet-IC	4.2V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SS	-	XC6223C33BNR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SS	-	XC6501C28ANR-G	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
ST	-	ASM812MEUS	Vdet-IC	4.38V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
ST	-	XC6127C44GNR	Vdet-IC	4.4V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
ST	-	XC6223C34BNR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
ST	-	XC6501C291NR-G	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SU	-	ASM812JEUS	Vdet-IC	4.0V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
SU	-	XC6127C46GNR	Vdet-IC	4.6V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SU	-	XC6223C35BNR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SU	-	XC6501C29ANR-G	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SV	-	ASM812TEUS	Vdet-IC	3.08V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
SV	-	XC6127C48GNR	Vdet-IC	4.8V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SV	-	XC6223C36BNR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SV	-	XC6501C301NR-G	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SW	-	ASM812SEUS	Vdet-IC	2.93V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
SX	-	ASM812REUS	Vdet-IC	2.63V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5c	Ali
SX	-	XC6127C50GNR	Vdet-IC	5.0V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SX	-	XC6223C37BNR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SX	-	XC6501C30ANR-G	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SY	-	PT7M6314US25D3	Vdet-IC	2.5V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
SY	-	XC6127C52GNR	Vdet-IC	5.2V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SY	-	XC6223C38BNR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SY	-	XC6501C311NR-G	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SZ	-	PT7M6314US25D4	Vdet-IC	2.5V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
SZ	-	XC6127C54GNR	Vdet-IC	5.4V±0.8%, +Reset PPO, -MR, Rt=100ms	SSOT-24	26cr	VD5	5j	Tor
SZ	-	XC6223C39BNR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
SZ	-	XC6501C31ANR-G	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
T	gc	ELM7539NCB	Vdet-IC	3.9V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
T	gd	ELM7539CCB	Vdet-IC	3.9V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
T0	-	AP8822C-10GI	Vdet-IC	1.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
T0	-	AP8822C-10GS	Vdet-IC	1.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
T0	-	AP8822C-10PI	Vdet-IC	1.0V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
T0	-	AP8822C-10PS	Vdet-IC	1.0V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
T0	-	R3116Q271C	Vdet-IC	2.7V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
T0	-	RP104Q271B5	LVR-IC	LDO, 2.75V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
T0	-	XC6225A22ANR-G	LVR-IC	LDO, 2.25V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
T1	-	AP8822C-11GI	Vdet-IC	1.1V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
T1	-	AP8822C-11GS	Vdet-IC	1.1V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
T1	-	AP8822C-11PI	Vdet-IC	1.1V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
T1	-	AP8822C-11PS	Vdet-IC	1.1V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
T1	-	BFG590W	Si-npn	UHF, 20V, 200mA, 400mW, B=60..250, 5GHz	SOT-343	24t6	-	5b	Phi
T1	-	R3116Q281C	Vdet-IC	2.8V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
T1	-	RP104Q211B	LVR-IC	LDO, 2.1V±0.8%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
T1	-	XC6225A232NR-G	LVR-IC	LDO, 2.3V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
T16	-	NESG2030M04	SiGeC-npn	HF, 8V, 35mA, 80mW, 60GHz, B=200..400	M04	59tc	-	5b	Cel
T1K	-	NESG3031m05	SiGeC-npn	HF, 12V, 35mA, 150mW, <110GHz, B=220..380	M05	42t1	-	5b	Cel
T2	-	AP8822C-12GI	Vdet-IC	1.2V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
T2	-	AP8822C-12GS	Vdet-IC	1.2V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
T2	-	AP8822C-12PI	Vdet-IC	1.2V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
T2	-	AP8822C-12PS	Vdet-IC	1.2V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
T2	-	BFG590W/X	Si-npn	UHF, 20V, 200mA, 400mW, B=60..250, 5GHz	SOT-343	26tc	-	5b	Phi
T2	-	R3116Q291C	Vdet-IC	2.9V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
T2	-	XC6223D12BNR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
T2	-	XC6225A23ANR-G	LVR-IC	LDO, 2.35V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
T3	-	AP8822C-13GI	Vdet-IC	1.3V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
T3	-	AP8822C-13GS	Vdet-IC	1.3V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
T3	-	AP8822C-13PI	Vdet-IC	1.3V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
T3	-	AP8822C-13PS	Vdet-IC	1.3V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
T3	-	BFG590W/XR	Si-npn	UHF, 20V, 200mA, 400mW, B=60..250, 5GHz	SOT-343R	26tu	-	5b	Phi
T3	-	R3116Q301C	Vdet-IC	3V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T3	-	XC6223D13BNR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
T3	-	XC6225A242NR-G	LVR-IC	LDO, 2.4V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
T4	-	AP8822C-14GI	Vdet-IC	1.4V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
T4	-	AP8822C-14GS	Vdet-IC	1.4V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
T4	-	AP8822C-14PI	Vdet-IC	1.4V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
T4	-	AP8822C-14PS	Vdet-IC	1.4V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
T4	-	R3116Q311C	Vdet-IC	3.1V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
T4	-	XC6223D14BNR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
T4	-	XC6225A24ANR-G	LVR-IC	LDO, 2.45V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
T5	-	AP8822C-15GI	Vdet-IC	1.5V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
T5	-	AP8822C-15GS	Vdet-IC	1.5V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
T5	-	AP8822C-15PI	Vdet-IC	1.5V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
T5	-	AP8822C-15PS	Vdet-IC	1.5V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
T5	-	BFG10W/X	Si-npn	VHF/UHF-Amp, 20V, 250mA, 400mW, B>25, 1.9GHz	SOT-343	24tc	-	5c	Phi
T5	-	R3116Q321C	Vdet-IC	3.2V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
T5	-	XC6223D15BNR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
T5	-	XC6225A252NR-G	LVR-IC	LDO, 2.5V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
T6	-	AP8822C-16GI	Vdet-IC	1.6V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
T6	-	AP8822C-16GS	Vdet-IC	1.6V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
T6	-	AP8822C-16PI	Vdet-IC	1.6V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
T6	-	AP8822C-16PS	Vdet-IC	1.6V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
T6	-	R3116Q331C	Vdet-IC	3.3V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
T6	-	XC6223D16BNR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
T6	-	XC6225A25ANR-G	LVR-IC	LDO, 2.55V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
T6A	-	S-1009C08I-N4T1U	Vdet-IC	0.8V±12mV, -Reset PPO	SC-82AB	26vdf	VD1	5c	Sii
T6B	-	S-1009C09I-N4T1U	Vdet-IC	0.9V±12mV, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6C	-	S-1009C10I-N4T1U	Vdet-IC	1.0V±12mV, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6D	-	S-1009C11I-N4T1U	Vdet-IC	1.1V±12mV, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6E	-	S-1009C12I-N4T1U	Vdet-IC	1.2V±12mV, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6F	-	S-1009C13I-N4T1U	Vdet-IC	1.3V±12mV, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6G	-	S-1009C14I-N4T1U	Vdet-IC	1.4V±12mV, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6H	-	S-1009C15I-N4T1U	Vdet-IC	1.5V±12mV, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6I	-	S-1009C16I-N4T1U	Vdet-IC	1.6V±12mV, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6J	-	S-1009C17I-N4T1U	Vdet-IC	1.7V±12mV, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6K	-	S-1009C18I-N4T1U	Vdet-IC	1.8V±12mV, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6L	-	S-1009C19I-N4T1U	Vdet-IC	1.9V±12mV, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6M	-	S-1009C20I-N4T1U	Vdet-IC	2.0V±12mV, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6N	-	S-1009C21I-N4T1U	Vdet-IC	2.1V±12mV, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6O	-	S-1009C22I-N4T1U	Vdet-IC	2.2V±12mV, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6P	-	S-1009C23I-N4T1U	Vdet-IC	2.3V±12mV, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6Q	-	S-1009C24I-N4T1U	Vdet-IC	2.4V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6R	-	S-1009C25I-N4T1U	Vdet-IC	2.5V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6S	-	S-1009C26I-N4T1U	Vdet-IC	2.6V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6T	-	S-1009C27I-N4T1U	Vdet-IC	2.7V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6U	-	S-1009C28I-N4T1U	Vdet-IC	2.8V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6V	-	S-1009C29I-N4T1U	Vdet-IC	2.9V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6W	-	S-1009C30I-N4T1U	Vdet-IC	3.0V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6X	-	S-1009C31I-N4T1U	Vdet-IC	3.1V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6Y	-	S-1009C32I-N4T1U	Vdet-IC	3.2V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T6Z	-	S-1009C33I-N4T1U	Vdet-IC	3.3V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T7	-	AP8822C-17GI	Vdet-IC	1.7V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
T7	-	AP8822C-17GS	Vdet-IC	1.7V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
T7	-	AP8822C-17PI	Vdet-IC	1.7V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
T7	-	AP8822C-17PS	Vdet-IC	1.7V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
T7	-	R3116Q341C	Vdet-IC	3.4V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
T7	-	XC6223D17BNR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
T7	-	XC6225A262NR-G	LVR-IC	LDO, 2.6V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
T78	-	2SC5507-FB	Si-npn	RF, LN, 15V, 12mA, 39mW, B=50..100, 25GHz	SOT-343	24tc	-	5c	Nec
T79	-	2SC5508-FB	Si-npn	RF, LN, 15V, 35mA, 115mW, B=50..100, 25GHz	SOT-343	24tc	-	5c	Nec
T7A	-	S-1009C34I-N4T1U	Vdet-IC	3.4V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T7B	-	S-1009C35I-N4T1U	Vdet-IC	3.5V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T7C	-	S-1009C36I-N4T1U	Vdet-IC	3.6V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T7D	-	S-1009C37I-N4T1U	Vdet-IC	3.7V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T7E	-	S-1009C38I-N4T1U	Vdet-IC	3.8V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T7F	-	S-1009C39I-N4T1U	Vdet-IC	3.9V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T7G	-	S-1009C40I-N4T1U	Vdet-IC	4.0V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T7H	-	S-1009C41I-N4T1U	Vdet-IC	4.1V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T7I	-	S-1009C42I-N4T1U	Vdet-IC	4.2V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T7J	-	S-1009C43I-N4T1U	Vdet-IC	4.3V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T7K	-	S-1009C44I-N4T1U	Vdet-IC	4.4V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T7L	-	S-1009C45I-N4T1U	Vdet-IC	4.5V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T7M	-	S-1009C46I-N4T1U	Vdet-IC	4.6V±0.5%, -Reset PPO	SC-82AB	26vdf	VD3	5c	Sii
T7s	-	BFP740ESD	SiGeC-npn	RF, 4.7V, 45mA, 160mW, 47GHz, B=160..400	SOT-343	26t1	-	5h	Inf
T7s	-	BFP740FESD	SiGeC-npn	RF, 4.7V, 45mA, 160mW, 47GHz, B=160..400	TSFP-4	42t1	-	5b	Inf
T8	-	1SV306	C-diode	Dual, VCO, VHF-Band, 15V, 5.5/6.5pF(2/10V), Rs<0.4Ω	SOT-343	24dv	-	5b	Tos
T8	-	AP8822C-18GI	Vdet-IC	1.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
T8	-	AP8822C-18GS	Vdet-IC	1.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
T8	-	AP8822C-18PI	Vdet-IC	1.8V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
T8	-	AP8822C-18PS	Vdet-IC	1.8V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
T8	-	R3116Q351C	Vdet-IC	3.5V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
T8	-	XC6215B092NR	LVR-IC	LDO, 0.9V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
T8	-	XC6223D18BNR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
T8	-	XC6225A26ANR-G	LVR-IC	LDO, 2.65V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
T80	-	2SC5509-FB	Si-npn	RF, LN, 15V, 100mA, 190mW, B=50..100, 15GHz	SOT-343	24tc	-	5c	Nec
T82	-	2SC4956	Si-npn	LN, HF, 9V, 10mA, 60mW, B=75..150, 12GHz	SOT-143	26tp	-	5c	Nec
T82	-	2SC5014-KB	Si-npn	HF, LN, 9V, 10mA, 60mW, B=75..150, 12GHz	SOT-143	26tu	-	5b	Nec
T83	-	2SC5015-KB	Si-npn	HF, LN, 9V, 30mA, 150mW, B=75..150, 12GHz	SOT-143	26tu	-	5b	Nec
T84	-	2SC5178	Si-npn	UHF, LN, 5V, 10mA, 30mW, B=70..140, 13.5GHz	SOT-143	26tu	-	5b	Nec
T84	-	2SC5178-FB	Si-npn	µWave, LN, 5V, 10mA, 30mW, B=70..140, 13.5GHz	SC-61	26tu	-	5b	Nec
T84	-	2SC5180-FB	Si-npn	µWave, LN, 5V, 10mA, 30mW, B=70..140, 15GHz	SOT-143	26tu	-	5b	Nec
T86	-	2SC5183-FB	Si-npn	µWave, LN, 5V, 30mA, 90mW, B=70..140, 12.5GHz	SC-61	26tu	-	5b	Nec
T86	-	2SC5185-FB	Si-npn	µWave, LN, 5V, 30mA, 90mW, B=70..140, 13GHz	SOT-143	26tu	-	5b	Nec
T88	-	2SC5192-FB	Si-npn	µWave, LN, 9V, 100mA, 200mW, B=80..160, 4.5GHz	SOT-143	26tu	-	5b	Nec
T88	-	2SC5194-FB	Si-npn	µWave, LN, 9V, 100mA, 150mW, 5GHz, B=80..160	SOT-143	26tu	-	5b	Nec
T89	-	2SC5288	Si-npn	UHF, DECT, 9V, 150mA, 200mW, 1.9GHz, B>60	SOT-143	26tc	-	5b	Nec
T8A	-	S-1009N08I-N4T1U	Vdet-IC	0.8V±12mV, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8B	-	S-1009N09I-N4T1U	Vdet-IC	0.9V±12mV, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8C	-	S-1009N10I-N4T1U	Vdet-IC	1.0V±12mV, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8D	-	S-1009N11I-N4T1U	Vdet-IC	1.1V±12mV, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8E	-	S-1009N12I-N4T1U	Vdet-IC	1.2V±12mV, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8F	-	S-1009N13I-N4T1U	Vdet-IC	1.3V±12mV, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8G	-	S-1009N14I-N4T1U	Vdet-IC	1.4V±12mV, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8H	-	S-1009N15I-N4T1U	Vdet-IC	1.5V±12mV, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8I	-	S-1009N16I-N4T1U	Vdet-IC	1.6V±12mV, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8J	-	S-1009N17I-N4T1U	Vdet-IC	1.7V±12mV, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8K	-	S-1009N18I-N4T1U	Vdet-IC	1.8V±12mV, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8L	-	S-1009N19I-N4T1U	Vdet-IC	1.9V±12mV, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8M	-	S-1009N20I-N4T1U	Vdet-IC	2.0V±12mV, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8N	-	S-1009N21I-N4T1U	Vdet-IC	2.1V±12mV, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8O	-	S-1009N22I-N4T1U	Vdet-IC	2.2V±12mV, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8P	-	S-1009N23I-N4T1U	Vdet-IC	2.3V±12mV, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8Q	-	S-1009N24I-N4T1U	Vdet-IC	2.4V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8R	-	S-1009N25I-N4T1U	Vdet-IC	2.5V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8S	-	S-1009N26I-N4T1U	Vdet-IC	2.6V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8T	-	S-1009N27I-N4T1U	Vdet-IC	2.7V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8U	-	S-1009N28I-N4T1U	Vdet-IC	2.8V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8V	-	S-1009N29I-N4T1U	Vdet-IC	2.9V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8W	-	S-1009N30I-N4T1U	Vdet-IC	3.0V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8X	-	S-1009N31I-N4T1U	Vdet-IC	3.1V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8Y	-	S-1009N32I-N4T1U	Vdet-IC	3.2V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T8Z	-	S-1009N33I-N4T1U	Vdet-IC	3.3V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T9	-	AP8822C-19GI	Vdet-IC	1.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
T9	-	AP8822C-19GS	Vdet-IC	1.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
T9	-	AP8822C-19PI	Vdet-IC	1.9V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
T9	-	AP8822C-19PS	Vdet-IC	1.9V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
T9	-	R3111Q091C	Vdet-IC	0.9V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
T9	-	R3116Q361C	Vdet-IC	3.6V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
T9	-	XC6215B102NR	LVR-IC	LDO, 1.0V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
T9	-	XC6223D19BNR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
T9	-	XC6225A272NR-G	LVR-IC	LDO, 2.7V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
T90	-	2SC5289	Si-npn	UHF, DECT, 9V, 300mA, 1.9GHz	SOT-143	26tc	-	5b	Nec
T9A	-	S-1009N34I-N4T1U	Vdet-IC	3.4V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T9B	-	S-1009N35I-N4T1U	Vdet-IC	3.5V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T9C	-	S-1009N36I-N4T1U	Vdet-IC	3.6V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T9D	-	S-1009N37I-N4T1U	Vdet-IC	3.7V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T9E	-	S-1009N38I-N4T1U	Vdet-IC	3.8V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T9F	-	S-1009N39I-N4T1U	Vdet-IC	3.9V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T9G	-	S-1009N40I-N4T1U	Vdet-IC	4.0V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T9H	-	S-1009N41I-N4T1U	Vdet-IC	4.1V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T9I	-	S-1009N42I-N4T1U	Vdet-IC	4.2V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T9J	-	S-1009N43I-N4T1U	Vdet-IC	4.3V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T9K	-	S-1009N44I-N4T1U	Vdet-IC	4.4V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T9L	-	S-1009N45I-N4T1U	Vdet-IC	4.5V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
T9M	-	S-1009N46I-N4T1U	Vdet-IC	4.6V±0.5%, -Reset ODO	SC-82AB	26vdf	VD1	5c	Sii
TA	-	ASM161LCUS	Vdet-IC	4.63V±2%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TA	-	R1114Q201D	LVR-IC	LDO, Low noise, 2.0V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
TA	-	XC6127C16HNR	Vdet-IC	1.6V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TA	-	XC6215B112NR	LVR-IC	LDO, 1.1V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TA	-	XC6223D20BNR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TA	-	XC6501C321NR-G	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TA3	-	S858TA3	MMIC	UHF-Amplifier, 3.6V, Pq=10dBm(500MHz)	SOT-143	24am	A1	5b	Vs
TB	-	ASM161MCUS	Vdet-IC	4.38V±2%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TB	-	R1114Q211D	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
TB	-	XC6127C18HNR	Vdet-IC	1.8V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TB	-	XC6215B122NR	LVR-IC	LDO, 1.2V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TB	-	XC6223D21BNR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TB	-	XC6501C32ANR-G	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TC	-	ASM161JCUS	Vdet-IC	4.0V±2%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TC	-	PT7M6314US26D3	Vdet-IC	2.6V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
TC	-	R1114Q221D	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
TC	-	XC6127C20HNR	Vdet-IC	2.0V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TC	-	XC6215B132NR	LVR-IC	LDO, 1.3V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TC	-	XC6223D22BNR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TC	-	XC6501C331NR-G	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TD	-	ASM161TCUS	Vdet-IC	3.08V±2%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TD	-	PT7M6314US26D4	Vdet-IC	2.6V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
TD	-	R1114Q231D	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
TD	-	XC6127C22HNR	Vdet-IC	2.2V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TD	-	XC6215B142NR	LVR-IC	LDO, 1.4V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TD	-	XC6223D23BNR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TD	-	XC6501C33ANR-G	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TE	-	ASM161SCUS	Vdet-IC	2.93V±2%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TE	-	R1114Q241D	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
TE	-	XC6127C24HNR	Vdet-IC	2.4V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TE	-	XC6215B152NR	LVR-IC	LDO, 1.5V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TE	-	XC6223D24BNR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TE	-	XC6501C341NR-G	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TF	-	ASM161RCUS	Vdet-IC	2.63V±2%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TF	-	R1114Q251D	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
TF	-	XC6127C26HNR	Vdet-IC	2.6V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TF	-	XC6215B162NR	LVR-IC	LDO, 1.6V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TF	-	XC6223D25BNR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TF	-	XC6501C34ANR-G	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TG	-	ASM162LCUS	Vdet-IC	4.63V±2%, -MR, +Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TG	-	PT7M6314US27D3	Vdet-IC	2.7V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
TG	-	R1114Q261D	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
TH	-	ASM162MCUS	Vdet-IC	4.38V±2%, -MR, +Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TH	-	PT7M6314US27D4	Vdet-IC	2.7V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
TH	-	R1114Q271D	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
TH	-	XC6127C28HNR	Vdet-IC	2.8V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TH	-	XC6215B172NR	LVR-IC	LDO, 1.7V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TH	-	XC6223D26BNR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TH	-	XC6501C351NR-G	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TI	-	ASM162JCUS	Vdet-IC	4.0V±2%, -MR, +Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TJ	-	ASM162TCUS	Vdet-IC	3.08V±2%, -MR, +Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TJ	-	R1114Q281D	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
TJ5	-	3SK265-5	n-MOSFET	VHF Catv-Tuner, Dual gate, 15V, 30mA, 200mW, Idsx=5..12mA	CP4	26fm	-	5b	San
TJ6	-	3SK265-6	n-MOSFET	VHF Catv-Tuner, Dual gate, 15V, 30mA, 200mW, Idsx=10..24mA	CP4	26fm	-	5b	San
TK	-	ASM162SCUS	Vdet-IC	2.93V±2%, -MR, +Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TK	-	PT7M6314US28D3	Vdet-IC	2.8V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
TK	-	R1114Q291D	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
TK	-	XC6127C30HNR	Vdet-IC	3.0V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TK	-	XC6215B182NR	LVR-IC	LDO, 1.8V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TK	-	XC6223D27BNR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TK	-	XC6501C35ANR-G	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TL	-	ASM162RCUS	Vdet-IC	2.63V±2%, -MR, +Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TL	-	PT7M6314US28D4	Vdet-IC	2.8V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
TL	-	XC6127C32HNR	Vdet-IC	3.2V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TL	-	XC6215B192NR	LVR-IC	LDO, 1.9V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TL	-	XC6223D28BNR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
TL	-	XC6501C361NR-G	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TM	-	ASM161LEUS	Vdet-IC	4.63V±2%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TM	-	XC6127C34HNR	Vdet-IC	3.4V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TM	-	XC6215B202NR	LVR-IC	LDO, 2.0V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TM	-	XC6223D29BNR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TM	-	XC6501C36ANR-G	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TN	-	ASM161MEUS	Vdet-IC	4.38V±2%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TN	-	XC6127C36HNR	Vdet-IC	3.6V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TN	-	XC6215B212NR	LVR-IC	LDO, 2.1V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TN	-	XC6223D30BNR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TN	-	XC6501C371NR-G	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TO	-	ASM161JEUS	Vdet-IC	4.0V±2%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TO	-	PT7M6314US29D3	Vdet-IC	2.9V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
TP	-	ASM161TEUS	Vdet-IC	3.08V±2%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TP	-	PT7M6314US29D4	Vdet-IC	2.9V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
TP	-	XC6127C38HNR	Vdet-IC	3.8V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TP	-	XC6215B222NR	LVR-IC	LDO, 2.2V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TP	-	XC6223D31BNR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TP	-	XC6501C37ANR-G	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TQ	-	ASM161SEUS	Vdet-IC	2.93V±2%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TR	-	ASM161REUS	Vdet-IC	2.63V±2%, -MR, -Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TR	-	XC6127C40HNR	Vdet-IC	4.0V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TR	-	XC6215B232NR	LVR-IC	LDO, 2.3V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TR	-	XC6223D32BNR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TR	-	XC6501C381NR-G	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TS	-	ASM162LEUS	Vdet-IC	4.63V±2%, -MR, +Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TS	-	PT7M6314US30D3	Vdet-IC	3.0V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
TS	-	XC6127C42HNR	Vdet-IC	4.2V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TS	-	XC6215B242NR	LVR-IC	LDO, 2.4V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TS	-	XC6223D33BNR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TS	-	XC6501C38ANR-G	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TT	-	ASM162MEUS	Vdet-IC	4.38V±2%, -MR, +Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TT	-	PT7M6314US30D4	Vdet-IC	3.0V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
TT	-	XC6127C44HNR	Vdet-IC	4.4V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TT	-	XC6215B252NR	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TT	-	XC6223D34BNR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TT	-	XC6501C391NR-G	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TU	-	ASM162JEUS	Vdet-IC	4.0V±2%, -MR, +Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TU	-	XC6127C46HNR	Vdet-IC	4.6V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TU	-	XC6215B262NR	LVR-IC	LDO, 2.6V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TU	-	XC6223D35BNR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TU	-	XC6501C39ANR-G	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TV	-	ASM162TEUS	Vdet-IC	3.08V±2%, -MR, +Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TV	-	XC6127C48HNR	Vdet-IC	4.8V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TV	-	XC6215B272NR	LVR-IC	LDO, 2.7V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TV	-	XC6223D36BNR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TV	-	XC6501C401NR-G	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TW	-	ASM162SEUS	Vdet-IC	2.93V±2%, -MR, +Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TW	-	PT7M6314US31D3	Vdet-IC	3.1V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
TX	-	ASM162REUS	Vdet-IC	2.63V±2%, -MR, +Reset ODO	SOT-143	24vdh	VD4	5c	Ali
TX	-	PT7M6314US31D4	Vdet-IC	3.1V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
TX	-	XC6127C50HNR	Vdet-IC	5.0V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TX	-	XC6215B282NR	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TX	-	XC6223D37BNR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TX	-	XC6501C40ANR-G	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TY	-	XC6127C52HNR	Vdet-IC	5.2V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TY	-	XC6215B292NR	LVR-IC	LDO, 2.9V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TY	-	XC6223D38BNR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TY	-	XC6501C411NR-G	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
TY4	-	2SC5502-4	Si-npn	VHF/UHF LN, 20V, 100mA, 500mW, B=90..180, 8GHz	SOT-343	26tu	-	5b	San
TY5	-	2SC5502-5	Si-npn	VHF/UHF LN, 20V, 100mA, 500mW, B=135..270, 8GHz	SOT-343	26tu	-	5b	San
TZ	-	XC6127C54HNR	Vdet-IC	5.4V±0.8%, +Reset PPO, -MR, Rt=200ms	SSOT-24	26cr	VD5	5j	Tor
TZ	-	XC6215B302NR	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
TZ	-	XC6223D39BNR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
TZ	-	XC6501C41ANR-G	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, PDR	SSOT-24	26vn	VR4	5a	Tor
U	gc	ELM7540NCB	Vdet-IC	4.0V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
U	gd	ELM7540CCB	Vdet-IC	4.0V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
U0	-	AP8822C-20GI	Vdet-IC	2.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
U0	-	AP8822C-20GS	Vdet-IC	2.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
U0	-	AP8822C-20PI	Vdet-IC	2.0V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U0	-	AP8822C-20PS	Vdet-IC	2.0V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
U0	-	R3111Q101C	Vdet-IC	1V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
U0	-	R3116Q371C	Vdet-IC	3.7V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
U0	-	RP104Q271C5	LVR-IC	LDO, 2.75V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
U0	-	XC6215B312NR	LVR-IC	LDO, 3.1V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
U0	-	XC6225B22ANR-G	LVR-IC	LDO, 2.25V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
U1	-	3SK283	n-FET	GaAs, Dual gate, UHF-TV-Tuner, 6V, Idss=4..16mA, Up=0.5..1.5V	SOT-143	26fm	-	5b	Tos
U1	-	AP8822C-21GI	Vdet-IC	2.1V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
U1	-	AP8822C-21GS	Vdet-IC	2.1V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
U1	-	AP8822C-21PI	Vdet-IC	2.1V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
U1	-	AP8822C-21PS	Vdet-IC	2.1V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
U1	-	R3111Q111C	Vdet-IC	1.1V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
U1	-	R3116Q381C	Vdet-IC	3.8V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
U1	-	RP104Q211C	LVR-IC	LDO, 2.1V±0.8%, 150mA	SC-82AB	26yr	VR1	5m	Ric
U1	-	XC6215B322NR	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
U1	-	XC6225B232NR-G	LVR-IC	LDO, 2.3V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
U2	-	AP8822C-22GI	Vdet-IC	2.2V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
U2	-	AP8822C-22GS	Vdet-IC	2.2V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
U2	-	AP8822C-22PI	Vdet-IC	2.2V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
U2	-	AP8822C-22PS	Vdet-IC	2.2V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
U2	-	R3111Q121C	Vdet-IC	1.2V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
U2	-	R3116Q391C	Vdet-IC	3.9V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
U2	-	XC6215B332NR	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
U2	-	XC6223E12BNR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
U2	-	XC6225B23ANR-G	LVR-IC	LDO, 2.35V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
U3	-	AP8822C-23GI	Vdet-IC	2.3V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
U3	-	AP8822C-23GS	Vdet-IC	2.3V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
U3	-	AP8822C-23PI	Vdet-IC	2.3V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
U3	-	AP8822C-23PS	Vdet-IC	2.3V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
U3	-	R3111Q131C	Vdet-IC	1.3V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
U3	-	R3116Q401C	Vdet-IC	4V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
U3	-	XC6215B342NR	LVR-IC	LDO, 3.4V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
U3	-	XC6223E13BNR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
U3	-	XC6225B242NR-G	LVR-IC	LDO, 2.4V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
U32	-	3SK132-32	n-MOSFET	Dual gate, VHF-Tuner, 20V, 25mA, 200mW, Idss=0.5..5mA	SOT-143	26fm	-	5c	Nec
U33	-	3SK132-33	n-MOSFET	Dual gate, VHF-Tuner, 20V, 25mA, 200mW, Idss=3..8mA	SOT-143	26fm	-	5c	Nec
U4	-	AP8822C-24GI	Vdet-IC	2.4V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
U4	-	AP8822C-24GS	Vdet-IC	2.4V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
U4	-	AP8822C-24PI	Vdet-IC	2.4V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
U4	-	AP8822C-24PS	Vdet-IC	2.4V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
U4	-	R3111Q141C	Vdet-IC	1.4V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
U4	-	R3116Q411C	Vdet-IC	4.1V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
U4	-	XC6215B352NR	LVR-IC	LDO, 3.5V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
U4	-	XC6223E14BNR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
U4	-	XC6225B24ANR-G	LVR-IC	LDO, 2.45V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
U42	-	3SK133-42	n-MOSFET	Dual gate, VHF-Tuner, 20V, 25mA, 200mW, Idss=0.01..2mA	SOT-143	26fm	-	5c	Nec
U43	-	3SK133-43	n-MOSFET	Dual gate, VHF-Tuner, 20V, 25mA, 200mW, Idss=1..6mA	SOT-143	26fm	-	5c	Nec
U5	-	AP8822C-25GI	Vdet-IC	2.5V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
U5	-	AP8822C-25GS	Vdet-IC	2.5V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
U5	-	AP8822C-25PI	Vdet-IC	2.5V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
U5	-	AP8822C-25PS	Vdet-IC	2.5V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
U5	-	R3111Q151C	Vdet-IC	1.5V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
U5	-	R3116Q421C	Vdet-IC	4.2V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
U5	-	XC6215B362NR	LVR-IC	LDO, 3.6V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
U5	-	XC6223E15BNR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
U5	-	XC6225B252NR-G	LVR-IC	LDO, 2.5V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
U55	-	3SK134B-UEE	n-MOSFET	Dual gate, UHF, 18V, 25mA, 200mW, Idss=0.4..5.0mA, 900MHz	SC-61	26fm	-	5b	Nec
U56	-	3SK134B-UEF	n-MOSFET	Dual gate, UHF, 18V, 25mA, 200mW, Idss=3.0..8.0mA, 900MHz	SC-61	26fm	-	5b	Nec
U56	-	3SK245	n-MOSFET	Dual gate, UHF-Tuner, 18V, 25mA	SOT-343	26fm	-	5c	Nec
U6	-	AP8822C-26GI	Vdet-IC	2.6V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
U6	-	AP8822C-26GS	Vdet-IC	2.6V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
U6	-	AP8822C-26PI	Vdet-IC	2.6V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
U6	-	AP8822C-26PS	Vdet-IC	2.6V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
U6	-	R3111Q161C	Vdet-IC	1.6V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
U6	-	R3116Q431C	Vdet-IC	4.3V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
U6	-	XC6215B372NR	LVR-IC	LDO, 3.7V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
U6	-	XC6223E16BNR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
U6	-	XC6225B25ANR-G	LVR-IC	LDO, 2.55V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
U65	-	3SK135A-LS	n-MOSFET	Dual gate, UHF, 20V, 25mA, 200mW, Idss=0.01..2.0mA, 900MHz	SC-61	23fm	-	5b	Nec
U66	-	3SK135A-KS	n-MOSFET	Dual gate, UHF, 20V, 25mA, 200mW, Idss=1.0..6.0mA, 900MHz	SC-61	23fm	-	5b	Nec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U7	-	3SK320	n-MESFET	GaAs, Dual gate, UHF, 6V, 18mA, 100mW, 20.5dB	2-2K1B	23fd	-	5b	Tos
U7	-	AP8822C-27GI	Vdet-IC	2.7V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
U7	-	AP8822C-27GS	Vdet-IC	2.7V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
U7	-	AP8822C-27PI	Vdet-IC	2.7V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
U7	-	AP8822C-27PS	Vdet-IC	2.7V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
U7	-	R3111Q171C	Vdet-IC	1.7V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
U7	-	R3116Q441C	Vdet-IC	4.4V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
U7	-	XC6215B382NR	LVR-IC	LDO, 3.8V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
U7	-	XC6223E17BNR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
U7	-	XC6225B262NR-G	LVR-IC	LDO, 2.6V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
U71	-	3SK177-71	n-MESFET	GaAs, Dual gate, UHF, 13V, 40mA, 200mW, Idss=5..15mA	SOT-143	23fm	-	5b	Nec
U71	-	3SK299-71	n-MOSFET	GaAs, Dual gate, UHF, 13V, Idss=5..15mA	SOT-343	26fm	-	5c	Nec
U72	-	3SK177-72	n-MESFET	GaAs, Dual gate, UHF, 13V, 40mA, 200mW, Idss=10..25mA	SOT-143	23fm	-	5b	Nec
U72	-	3SK299-72	n-MOSFET	GaAs, Dual gate, UHF, 13V, Idss=10..25mA	SOT-343	26fm	-	5c	Nec
U73	-	3SK177-73	n-MESFET	GaAs, Dual gate, UHF, 13V, 40mA, 200mW, Idss=20..35mA	SOT-143	23fm	-	5b	Nec
U73	-	3SK299-73	n-MOSFET	GaAs, Dual gate, UHF, 13V, Idss=20..35mA	SOT-343	26fm	-	5c	Nec
U74	-	3SK177-74	n-MESFET	GaAs, Dual gate, UHF, 13V, 40mA, 200mW, Idss=30..40mA	SOT-143	23fm	-	5b	Nec
U74	-	3SK299-74	n-MOSFET	GaAs, Dual gate, UHF, 13V, Idss=30..40mA	SOT-343	26fm	-	5c	Nec
U76	-	3SK206-76	n-MESFET	GaAs, Dual gate, UHF, 10V, 80mA, 200mW, Idss=10..25mA	SOT-143	23fm	-	5b	Nec
U77	-	3SK206-77	n-MESFET	GaAs, Dual gate, UHF, 10V, 80mA, 200mW, Idss=20..35mA	SOT-143	23fm	-	5b	Nec
U78	-	3SK206-78	n-MESFET	GaAs, Dual gate, UHF, 10V, 80mA, 200mW, Idss=30..50mA	SOT-143	23fm	-	5b	Nec
U79	-	3SK206-79	n-MESFET	GaAs, Dual gate, UHF, 10V, 80mA, 200mW, Idss=45..80mA	SOT-143	23fm	-	5b	Nec
U8	-	AP8822C-28GI	Vdet-IC	2.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
U8	-	AP8822C-28GS	Vdet-IC	2.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
U8	-	AP8822C-28PI	Vdet-IC	2.8V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
U8	-	AP8822C-28PS	Vdet-IC	2.8V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
U8	-	R3111Q181C	Vdet-IC	1.8V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
U8	-	R3116Q451C	Vdet-IC	4.5V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
U8	-	XC6215B392NR	LVR-IC	LDO, 3.9V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
U8	-	XC6223E18BNR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
U8	-	XC6225B26ANR-G	LVR-IC	LDO, 2.65V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
U9	-	AP8822C-29GI	Vdet-IC	2.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
U9	-	AP8822C-29GS	Vdet-IC	2.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
U9	-	AP8822C-29PI	Vdet-IC	2.9V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
U9	-	AP8822C-29PS	Vdet-IC	2.9V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
U9	-	R3111Q191C	Vdet-IC	1.9V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
U9	-	R3116Q461C	Vdet-IC	4.6V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
U9	-	XC6215B402NR	LVR-IC	LDO, 4.0V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
U9	-	XC6223E19BNR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
U9	-	XC6225B272NR-G	LVR-IC	LDO, 2.7V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
U91	-	3SK243	n-MOSFET	Dual gate, CATV-Tuner, 18V, 25mA	SOT-143	26fm	-	5c	Nec
UA	-	PT7M6314US32D3	Vdet-IC	3.2V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
UA	-	R1114Q301D	LVR-IC	LDO, Low noise, 3.0V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
UA	-	XC6127C16JNR	Vdet-IC	1.6V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UA	-	XC6215B412NR	LVR-IC	LDO, 4.1V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
UA	-	XC6223E20BNR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UAG	-	UIC8111G-A-AD4-R	Vdet-IC	2.63V±2%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5b	Utc
UB	-	2SK1771	n-MOSFET	V-MOS, FM/VHF, 12.5V, 30mA, 150mW, Gps=23dB	SOT-143R	26fn	-	5b	Tos
UB	-	PT7M6314US32D4	Vdet-IC	3.2V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
UB	-	R1114Q311D	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
UB	-	XC6127C18JNR	Vdet-IC	1.8V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UB	-	XC6215B422NR	LVR-IC	LDO, 4.2V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
UB	-	XC6223E21BNR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UBG	-	UIC8111G-B-AD4-R	Vdet-IC	2.93V±2%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5b	Utc
UC	-	3SK126	n-MOSFET	Dual gate, VHF, 15V, Idss>0mA, Up<1V	SOT-143	26fm	-	5b	Tos
UC	-	R1114Q321D	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
UC	-	XC6127C20JNR	Vdet-IC	2.0V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UC	-	XC6215B432NR	LVR-IC	LDO, 4.3V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
UC	-	XC6223E22BNR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UCG	-	UIC8111G-C-AD4-R	Vdet-IC	3.08V±2%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5b	Utc
UD	-	3SK127	n-MOSFET	Dual gate, UHF, 15V, Idss>0mA, Up<1V	SOT-143	26fm	-	5b	Tos
UD	-	R1114Q331D	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
UD	-	XC6127C22JNR	Vdet-IC	2.2V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UD	-	XC6215B442NR	LVR-IC	LDO, 4.4V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
UD	-	XC6223E23BNR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UDG	-	UIC8111G-D-AD4-R	Vdet-IC	4.0V±2%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5b	Utc
UE	-	PT7M6314US33D3	Vdet-IC	3.3V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
UE	-	R1114Q341D	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
UE	-	XC6127C24JNR	Vdet-IC	2.4V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UE	-	XC6215B452NR	LVR-IC	LDO, 4.5V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UE	-	XC6223E24BNR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UEG	-	UIC8111G-E-AD4-R	Vdet-IC	4.38V±2%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5b	Utc
UF	-	PT7M6314US33D4	Vdet-IC	3.3V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
UF	-	R1114Q351D	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
UF	-	XC6127C26JNR	Vdet-IC	2.6V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UF	-	XC6215B462NR	LVR-IC	LDO, 4.6V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
UF	-	XC6223E25BNR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UFG	-	UIC8111G-F-AD4-R	Vdet-IC	4.38V±2%, -MR, -Reset PPO	SOT-143	24vdh	VD5	5b	Utc
UG	-	3SK140	n-MOSFET	GaAs, Dual gate, UHF-TV-Tuner	SOT-143	26fm	-	5b	Tos
UG	-	R1114Q361D	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
UH	-	R1114Q371D	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
UH	-	XC6127C28JNR	Vdet-IC	2.8V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UH	-	XC6215B472NR	LVR-IC	LDO, 4.7V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
UH	-	XC6223E26BNR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UHGR	-	3SK151-GR	n-MOSFET	Dual gate, VHF, 15V, 30mA, 150mW, Ids=6..14mA	2-3J1A	26fm	-	5b	Tos
UHY	-	3SK151-Y	n-MOSFET	Dual gate, VHF, 15V, 30mA, 150mW, Ids=3..7mA	2-3J1A	26fm	-	5b	Tos
UI	-	PT7M6314US34D3	Vdet-IC	3.4V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
UJ	-	3SK195	n-MOSFET	Dual gate, VHF, 13.5V, Idss>0mA	SOT-143	26fm	-	5b	Tos
UJ	-	PT7M6314US34D4	Vdet-IC	3.4V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
UJ	-	R1114Q381D	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
UK	-	R1114Q391D	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
UK	-	XC6127C30JNR	Vdet-IC	3.0V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UK	-	XC6215B482NR	LVR-IC	LDO, 4.8V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
UK	-	XC6223E27BNR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UL	-	XC6127C32JNR	Vdet-IC	3.2V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UL	-	XC6215B492NR	LVR-IC	LDO, 4.9V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
UL	-	XC6223E28BNR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UM	-	PT7M6314US35D3	Vdet-IC	3.5V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
UM	-	XC6127C34JNR	Vdet-IC	3.4V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UM	-	XC6215B502NR	LVR-IC	LDO, 5.0V±2%, 200mA, +CE	SSOT-24	26vn	VR4	5b	Tor
UM	-	XC6223E29BNR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UN	-	3SK240	n-FET	GaAs, Dual gate, UHF, 9V, Idss=6..20mA	SOT-143	26fm	-	5b	Tos
UN	-	3SK274	n-FET	GaAs, Dual gate, UHF, RF-Amp, 9V, Idss=6..20mA, 100mW, 19ms	SOT-143	24f1	-	5b	Tos
UN	-	PT7M6314US35D4	Vdet-IC	3.5V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
UN	-	XC6127C36JNR	Vdet-IC	3.6V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UN	-	XC6223E30BNR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UO	-	3SK232	n-MOSFET	Dual gate, UHF, 12.5V, Idss<0.1mA	SOT-143	26fm	-	5b	Tos
UP	-	XC6127C38JNR	Vdet-IC	3.8V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UP	-	XC6223E31BNR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UQ	-	PT7M6314US36D3	Vdet-IC	3.6V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
UR	-	3SK207	n-MOSFET	Dual gate, UHF, 13.5V, Idss>0V	SOT-143	26fm	-	5b	Tos
UR	-	PT7M6314US36D4	Vdet-IC	3.6V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
UR	-	XC6127C40JNR	Vdet-IC	4.0V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UR	-	XC6223E32BNR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
US	-	XC6127C42JNR	Vdet-IC	4.2V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
US	-	XC6223E33BNR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UT	-	3SK225	n-MOSFET	Dual gate, FM..UHF, 13.5V, Idss>0V	SOT-143	26fm	-	5b	Tos
UT	-	XC6127C44JNR	Vdet-IC	4.4V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UT	-	XC6223E34BNR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UU	-	3SK226	n-MOSFET	Dual gate, FM/VHF, 13.5V, Idss>0V	SOT-143	26fm	-	5b	Tos
UU	-	PT7M6314US37D3	Vdet-IC	3.7V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
UU	-	XC6127C46JNR	Vdet-IC	4.6V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UU	-	XC6223E35BNR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UV	-	PT7M6314US37D4	Vdet-IC	3.7V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
UV	-	XC6127C48JNR	Vdet-IC	4.8V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UV	-	XC6223E36BNR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UX	-	XC6127C50JNR	Vdet-IC	5.0V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UX	-	XC6221B491NR	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
UX	-	XC6223E37BNR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UY	-	PT7M6314US38D3	Vdet-IC	3.8V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
UY	-	XC6127C52JNR	Vdet-IC	5.2V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UY	-	XC6221B501NR	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
UY	-	XC6223E38BNR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
UZ	-	PT7M6314US38D4	Vdet-IC	3.8V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
UZ	-	XC6127C54JNR	Vdet-IC	5.4V±0.8%, +Reset PPO, -MR, Rt=400ms	SSOT-24	26cr	VD5	5j	Tor
UZ	-	XC6223E39BNR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, ICP	SSOT-24	26vn	VR4	5a	Tor
V	gc	ELM7520NCB	Vdet-IC	2.0V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
V	gd	ELM7520CCB	Vdet-IC	2.0V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
V0	-	R3111Q201C	Vdet-IC	2V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
V0	-	R3116Q471C	Vdet-IC	4.7V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V0	-	RP104Q271D5	LVR-IC	LDO, 2.75V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
V0	-	XC6225A27ANR-G	LVR-IC	LDO, 2.75V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
V01	-	3SK179-M	n-MOSFET	Dual gate, VHF TV-Tun/Mix, 20V, 20mA, 200mW, Idsx=7..13mA	SOT-143	26fm	-	5b	Pan
V02	-	3SK179-L	n-MOSFET	Dual gate, VHF TV-Tun/Mix, 20V, 20mA, 200mW, Idsx=11..19mA	SOT-143	26fm	-	5b	Pan
V03	-	3SK179-K	n-MOSFET	Dual gate, VHF TV-Tun/Mix, 20V, 20mA, 200mW, Idsx=17..25mA	SOT-143	26fm	-	5b	Pan
V1	-	BFG25AW/X	Si-npn	VHF/UHF-Amp, 8V, 6.5mA, 200mW, B>50..200, 5GHz	SOT-343	24tc	-	5b	Phi
V1	-	R3111Q211C	Vdet-IC	2.1V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
V1	-	R3116Q481C	Vdet-IC	4.8V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
V1	-	RP104Q211D	LVR-IC	LDO, 2.1V±0.8%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
V1	-	XC6225A282NR-G	LVR-IC	LDO, 2.8V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
V10	-	3SK131-10	n-MOSFET	Dual gate, VHF-Tuner, 20V, 25mA, 200mW, Idss=7..13mA	SOT-143	26fm	-	5c	Nec
V11	-	3SK131-11	n-MOSFET	Dual gate, VHF-Tuner, 20V, 25mA, 200mW, Idss=11..19mA	SOT-143	26fm	-	5c	Nec
V11	-	3SK242	n-MOSFET	Dual gate, VHF-Tuner, 20V, 25mA	SOT-343	26fm	-	5c	Nec
V11	-	BFG25A/X	Si-npn	VHF/UHF-Amp, 8V, 6.5mA, 32mW, B>50..200, 5GHz	SOT-143B	24tc	-	5c	Phi
V12	-	3SK131-12	n-MOSFET	Dual gate, VHF-Tuner, 20V, 25mA, 200mW, Idss=17..25mA	SOT-143	26fm	-	5c	Nec
V12	-	BFG67/X	Si-npn	VHF/UHF-Amp, 20V, 50mA, 200mW, B=65..150, 7.5GHz	SOT-143	24tc	-	5c	Phi
V13	-	3SK131-13	n-MOSFET	Dual gate, VHF-Tuner, 20V, 25mA, 200mW, Idss=20..30mA	SOT-143	26fm	-	5c	Nec
V13	-	BFG197/X	Si-npn	VHF/UHF, 20V, 100mA, 350mW, B=110, 7.5GHz	SOT-143	24tc	-	5c	Phi
V14	-	BFG93A/X	Si-npn	VHF/UHF-Amp, 20V, 35mA, 300mW, B=90, 6GHz	SOT-143	24tc	-	5c	Phi
V16	-	BFG33/X	Si-npn	UHF, 9V, 20mA, 140mW, B=50..90, 12GHz	SOT-143	24tc	-	5b	Phi
V2	-	BFG67W	Si-npn	VHF/UHF-Amp, 20V, 50mA, 200mW, B=65..150, 7.5GHz	SOT-343	24t6	-	5c	Phi
V2	-	R3111Q221C	Vdet-IC	2.2V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
V2	-	R3116Q491C	Vdet-IC	4.9V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
V2	-	XC6223F12BNR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
V2	-	XC6225A28ANR-G	LVR-IC	LDO, 2.85V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
V21	-	3SK222	n-MOSFET	Dual gate, VHF, 18V, 25mA	SOT-143	26fm	-	5c	Nec
V21	-	3SK246	n-MOSFET	Dual gate, FM/VHF, 18V, 25mA	SOT-343	26fm	-	5c	Nec
V22	-	3SK223	n-MOSFET	Dual gate, CATV, 18V, 25mA	SOT-143	26fm	-	5c	Nec
V26	-	BFG67/XR	Si-npn	VHF/UHF-Amp, 20V, 50mA, 200mW, B=65..150, 7.5GHz	SOT-143R	26tc	-	5c	Phi
V3	-	BFG25AW/XR	Si-npn	VHF/UHF-Amp, 8V, 6.5mA, 200mW, B>50..200, 5GHz	SOT-343R	26tc	-	5b	Phi
V3	-	BFG67	Si-npn	VHF/UHF-Amp, 20V, 50mA, 200mW, B=65..150, 7.5GHz	SOT-143	24t6	-	5c	Phi
V3	-	R3111Q231C	Vdet-IC	2.3V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
V3	-	R3116Q501C	Vdet-IC	5V±0.8%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
V3	-	XC6223F13BNR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
V3	-	XC6225A292NR-G	LVR-IC	LDO, 2.9V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
V32	-	BF750	Si-npn	UHF, 15V, 35mA, 7000MHz	SOT-143	26tu	-	5c	Phi
V34	-	BF749	Si-npn	UHF, 20V, 25mA, 5000MHz	SOT-143	26tu	-	5c	Phi
V35	-	BFG197/XR	Si-npn	VHF/UHF, 20V, 100mA, 350mW, B=110, 7.5GHz	SOT-143R	26tc	-	5c	Phi
V38	-	BF752	Si-npn	UHF, 15V, 35mA, 7GHz	SOT-143	24t1	-	5c	Phi
V4	-	R3111Q241C	Vdet-IC	2.4V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
V4	-	XC6223F14BNR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
V4	-	XC6225A29ANR-G	LVR-IC	LDO, 2.95V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
V5	-	BFG197	Si-npn	VHF/UHF, 20V, 100mA, 350mW, B=110, 7.5GHz	SOT-143	24t6	-	5c	Phi
V5	-	R3111Q251C	Vdet-IC	2.5V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
V5	-	XC6223F15BNR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
V5	-	XC6225A302NR-G	LVR-IC	LDO, 3.0V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
V6	-	BFG33	Si-npn	UHF, 9V, 20mA, 140mW, B=50..90, 12GHz	SOT-143	24t6	-	5b	Phi
V6	-	BFG67W/X	Si-npn	VHF/UHF-Amp, 20V, 50mA, 200mW, B=65..150, 7.5GHz	SOT-343	24tc	-	5c	Phi
V6	-	R3111Q261C	Vdet-IC	2.6V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
V6	-	XC6223F16BNR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
V6	-	XC6225A30ANR-G	LVR-IC	LDO, 3.05V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
V7	-	BFG67W/XR	Si-npn	VHF/UHF-Amp, 20V, 50mA, 200mW, B=65..150, 7.5GHz	SOT-343R	26tc	-	5c	Phi
V7	-	R3111Q271C	Vdet-IC	2.7V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
V7	-	XC6223F17BNR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
V7	-	XC6225A312NR-G	LVR-IC	LDO, 3.1V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
V8	-	R3111Q281C	Vdet-IC	2.8V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
V8	-	XC6223F18BNR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
V8	-	XC6225A31ANR-G	LVR-IC	LDO, 3.15V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
V9	-	R3111Q291C	Vdet-IC	2.9V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
V9	-	XC6223F19BNR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
V9	-	XC6225A322NR-G	LVR-IC	LDO, 3.2V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
VA	-	R1114Q401D	LVR-IC	LDO, Low noise, 4.0V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
VA	-	XC6127C16KNR	Vdet-IC	1.6V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VA	-	XC6223F20BNR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VA	-	XC6501D121NR-G	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VB	-	R1114Q281D5	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
VB	-	XC6127C18KNR	Vdet-IC	1.8V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VB	-	XC6223F21BNR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VB	-	XC6501D12ANR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VC	-	PT7M6314US39D3	Vdet-IC	3.9V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VC	-	XC6127C20KNR	Vdet-IC	2.0V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VC	-	XC6223F22BNR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VC	-	XC6501D131NR-G	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VD	-	PT7M6314US39D4	Vdet-IC	3.9V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
VD	-	XC6127C22KNR	Vdet-IC	2.2V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VD	-	XC6223F23BNR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VD	-	XC6501D13ANR-G	LVR-IC	LDO, 1.35V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VE	-	XC6127C24KNR	Vdet-IC	2.4V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VE	-	XC6223F24BNR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VE	-	XC6501D141NR-G	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VF	-	XC6127C26KNR	Vdet-IC	2.6V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VF	-	XC6223F25BNR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VF	-	XC6501D14ANR-G	LVR-IC	LDO, 1.45V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VG	-	PT7M6314US40D3	Vdet-IC	4.0V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
VH	-	PT7M6314US40D4	Vdet-IC	4.0V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
VH	-	XC6127C28KNR	Vdet-IC	2.8V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VH	-	XC6223F26BNR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VH	-	XC6501D151NR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VK	-	PT7M6314US41D3	Vdet-IC	4.1V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
VK	-	XC6127C30KNR	Vdet-IC	3.0V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VK	-	XC6223F27BNR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VK	-	XC6501D15ANR-G	LVR-IC	LDO, 1.55V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VL	-	PT7M6314US41D4	Vdet-IC	4.1V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
VL	-	XC6127C32KNR	Vdet-IC	3.2V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VL	-	XC6223F28BNR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VL	-	XC6501D161NR-G	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VM	-	XC6127C34KNR	Vdet-IC	3.4V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VM	-	XC6223F29BNR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VM	-	XC6501D16ANR-G	LVR-IC	LDO, 1.65V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VN	-	XC6127C36KNR	Vdet-IC	3.6V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VN	-	XC6223F30BNR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VN	-	XC6501D171NR-G	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VO	-	PT7M6314US42D3	Vdet-IC	4.2V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
VP	-	PT7M6314US42D4	Vdet-IC	4.2V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
VP	-	XC6127C38KNR	Vdet-IC	3.8V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VP	-	XC6223F31BNR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VP	-	XC6501D17ANR-G	LVR-IC	LDO, 1.75V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VR	-	XC6127C40KNR	Vdet-IC	4.0V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VR	-	XC6223F32BNR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VR	-	XC6501D181NR-G	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VS	-	PT7M6314US43D3	Vdet-IC	4.3V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
VS	-	XC6127C42KNR	Vdet-IC	4.2V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VS	-	XC6223F33BNR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VS	-	XC6501D18ANR-G	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VT	-	PT7M6314US43D4	Vdet-IC	4.3V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
VT	-	XC6127C44KNR	Vdet-IC	4.4V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VT	-	XC6223F34BNR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VT	-	XC6501D191NR-G	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VU	-	XC6127C46KNR	Vdet-IC	4.6V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VU	-	XC6223F35BNR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VU	-	XC6501D19ANR-G	LVR-IC	LDO, 1.95V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VV	-	XC6127C48KNR	Vdet-IC	4.8V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VV	-	XC6223F36BNR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VV	-	XC6501D201NR-G	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VW	-	PT7M6314US44D3	Vdet-IC	4.4V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
VX	-	PT7M6314US44D4	Vdet-IC	4.4V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
VX	-	XC6127C50KNR	Vdet-IC	5.0V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VX	-	XC6223F37BNR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VX	-	XC6501D20ANR-G	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VX3	-	S593TXRW	MMIC	UHF, 8V, 30mA, 200mW, Idss=50..500µA	SOT-343R	26fm	A3	5c	Vs
VY	-	XC6127C52KNR	Vdet-IC	5.2V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VY	-	XC6223F38BNR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VY	-	XC6501D211NR-G	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
VZ	-	XC6127C54KNR	Vdet-IC	5.4V±0.8%, +Reset PPO, -MR, Rt=800ms	SSOT-24	26cr	VD5	5j	Tor
VZ	-	XC6223F39BNR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL, ICP	SSOT-24	26vn	VR4	5a	Tor
VZ	-	XC6501D21ANR-G	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
W	gc	ELM7521NCB	Vdet-IC	2.1V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
W	gd	ELM7521CCB	Vdet-IC	2.1V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
W0	-	AP8822C-30GI	Vdet-IC	3.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
W0	-	AP8822C-30GS	Vdet-IC	3.0V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
W0	-	AP8822C-30PI	Vdet-IC	3.0V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
W0	-	AP8822C-30PS	Vdet-IC	3.0V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
W0	-	R3111Q301C	Vdet-IC	3V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
W0	-	RP103Q221B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
W03	-	S503TRW	MMIC	DG, UHF, 8V, 30mA, 200mW, Idss=9..18mA	SOT-343R	26fm	A3	5c	Vs
W04	-	S504TRW	MMIC	UHF, 8V, 30mA, 200mW, Idss=7..14mA	SOT-343R	26fm	A3	5c	Vs
W05	-	S505TRW	MMIC	UHF, 8V, 30mA, 200mW, Idss=8..16mA	SOT-343R	26fm	A3	5c	Vs
W0F	-	TSDF1205RW	Si-npn	UHF-VHF, LN, 9V, 12mA, 40mW, B=50..250, 12GHz	SOT-343R	26tu	-	5b	Vs
W1	-	AP8822C-31GI	Vdet-IC	3.1V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
W1	-	AP8822C-31GS	Vdet-IC	3.1V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
W1	-	AP8822C-31PI	Vdet-IC	3.1V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
W1	-	AP8822C-31PS	Vdet-IC	3.1V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
W1	-	R3111Q311C	Vdet-IC	3.1V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
W1	-	RP103Q161B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
W13	-	S913TRW	MMIC	UHF, 12V, 30mA, 200mW, Idss=50..500µA	SOT-343R	26fm	A3	5c	Vs
W18	-	BFP181TRW	Si-npn	UHF, 20V, 20mA, 175mW, B=50..200, 8GHz	SOT-343R	26tu	-	5b	Vs
W18	-	BFP181TW	Si-npn	UHF, 20V, 20mA, 175mW, B=50..200, 8GHz	SOT-343	24tc	-	5b	Sil
W19	-	BFP193TRW	Si-npn	UHF, 20V, 80mA, 580mW, B=50..200, 8GHz	SOT-343	26tu	-	5b	Sil
W2	-	AP8822C-32GI	Vdet-IC	3.2V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
W2	-	AP8822C-32GS	Vdet-IC	3.2V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
W2	-	AP8822C-32PI	Vdet-IC	3.2V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
W2	-	AP8822C-32PS	Vdet-IC	3.2V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
W2	-	R3111Q321C	Vdet-IC	3.2V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
W2	-	RP103Q141B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
W2	-	TSDF1220RW	Si-npn	UHF-VHF, LN, 9V, 40mA, 200mW, B=50..150, 12GHz	SOT-343R	26tu	-	5b	Vs
W22	-	S822TRW	Si-npn	UHF, LN, 12V, 8mA, 30mW, B=40..150, 5.2GHz	SOT-343R	26tu	-	5b	Vs
W28	-	BFP280TRW	Si-npn	UHF, 10V, 10mA, 80mW, B=30..200, 7GHz	SOT-343	26tu	-	5b	Vs
W28	-	BFP280TW	Si-npn	VHF/UHF, LN, 15V, 10mA, 80mW, B=50..150, 5GHz	SOT-343	24tc	-	5b	Vs
W3	-	AP8822C-33GI	Vdet-IC	3.3V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
W3	-	AP8822C-33GS	Vdet-IC	3.3V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
W3	-	AP8822C-33PI	Vdet-IC	3.3V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
W3	-	AP8822C-33PS	Vdet-IC	3.3V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
W3	-	R3111Q331C	Vdet-IC	3.3V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
W3	-	RP103Q171B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
W4	-	AP8822C-34GI	Vdet-IC	3.4V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
W4	-	AP8822C-34GS	Vdet-IC	3.4V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
W4	-	AP8822C-34PI	Vdet-IC	3.4V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
W4	-	AP8822C-34PS	Vdet-IC	3.4V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
W4	-	R3111Q341C	Vdet-IC	3.4V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
W4	-	RP103Q241B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SC-82AB	26vn	VR4	5m	Ric
W5	-	AP8822C-35GI	Vdet-IC	3.5V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
W5	-	AP8822C-35GS	Vdet-IC	3.5V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
W5	-	AP8822C-35PI	Vdet-IC	3.5V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
W5	-	AP8822C-35PS	Vdet-IC	3.5V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
W5	-	R3111Q351C	Vdet-IC	3.5V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
W59	-	S595TRW	MMIC	UHF, 8V, 20mA, 200µA, Idss=50..500µA	SOT-343R	26fm	A3	5c	Vs
W5L	-	S592TRW	MMIC	UHF, 8V, 20mA, 160mW, Idss=50..500µA	SOT-343R	26fm	A3	5c	Vs
W6	-	AP8822C-36GI	Vdet-IC	3.6V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
W6	-	AP8822C-36GS	Vdet-IC	3.6V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
W6	-	AP8822C-36PI	Vdet-IC	3.6V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
W6	-	AP8822C-36PS	Vdet-IC	3.6V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
W6	-	R3111Q361C	Vdet-IC	3.6V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
W7	-	AP8822C-37GI	Vdet-IC	3.7V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
W7	-	AP8822C-37GS	Vdet-IC	3.7V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
W7	-	AP8822C-37PI	Vdet-IC	3.7V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
W7	-	AP8822C-37PS	Vdet-IC	3.7V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
W7	-	R3111Q371C	Vdet-IC	3.7V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
W8	-	AP8822C-38GI	Vdet-IC	3.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
W8	-	AP8822C-38GS	Vdet-IC	3.8V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw
W8	-	AP8822C-38PI	Vdet-IC	3.8V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
W8	-	AP8822C-38PS	Vdet-IC	3.8V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
W8	-	DWA010	Si-diode	Dual, Sw, U-sp, 85V, 100mA, Vf<1.2V(100mA), 4ns	CP4	26dv	-	5b	San
W8	-	R3111Q381C	Vdet-IC	3.8V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
W82	-	BFP182TRW	Si-npn	UHF, 20V, 35mA, 250mW, B=50..200, >8GHz	SOT-343	26tu	-	5b	Vs
W82	-	BFP182TW	Si-npn	UHF, 20V, 35mA, 250mW, B=50..200, >8GHz	SOT-343	24tc	-	5b	Sil
W83	-	BFP183T	Si-npn	UHF, 20V, 65mA, 450mW, B=50..200, 8GHz	SOT-143	24tc	-	5b	Vs
W83	-	BFP183TRW	Si-npn	UHF, 20V, 65mA, 450mW, B=50..200, 8GHz	SOT-343	26tu	-	5b	Vs
W83	-	BFP183TW	Si-npn	UHF, 20V, 65mA, 450mW, B=50..200, 8GHz	SOT-343	24tc	-	5b	Sil
W9	-	AP8822C-39GI	Vdet-IC	3.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82	26vdl	VD7	5ga	Anw
W9	-	AP8822C-39GS	Vdet-IC	3.9V±2%, -Reset PPO, 200ms, Halogen-fre	SC-82S	90vdl	VD7	5ga	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
W9	-	AP8822C-39PI	Vdet-IC	3.9V±2%, -Reset PPO, 200ms	SC-82	26vdl	VD7	5g	Anw
W9	-	AP8822C-39PS	Vdet-IC	3.9V±2%, -Reset PPO, 200ms	SC-82S	90vdl	VD7	5g	Anw
W9	-	R3111Q391C	Vdet-IC	3.9V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
W91	-	BFP193TW	Si-npn	UHF, 20V, 80mA, 580mW, B=50..200, 8GHz	SOT-343	24tc	-	5b	Sil
W93	-	S593TRW	MMIC	UHF, 8V, 30mA, 200mW, Idss=50..500µA	SOT-343R	26fm	A3	5c	Vs
W94	-	S594TRW	MMIC	UHF, 8V, 20mA, 160mW, Idss=50..500µA	SOT-343R	26fm	A3	5c	Vs
W99	-	S949TRW	MMIC	UHF, 12V, 30mA, 200mW, Idss=50..500µA	SOT-343R	26fm	A3	5c	Vs
WA	-	PT7M6314US45D3	Vdet-IC	4.5V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
WA	-	R3112Q501A	Vdet-IC	5V±2%, -Reset PPO	SC-82AB	26rp	VD3	5m	Ric
WA	-	R3132Q23EA2	Vdet-IC	2.32V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
WB	-	PT7M6314US45D4	Vdet-IC	4.5V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
WB	-	R3132Q26EA3	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
WC	-	R3132Q29EA3	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
WD	-	R3132Q30EA8	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
WE	-	PT7M6314US46D3	Vdet-IC	4.6V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
WE	-	R3132Q43EA8	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
WF	-	PT7M6314US46D4	Vdet-IC	4.6V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
WF	-	R3132Q46EA3	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
WF0	-	TSDF1205W	Si-npn	UHF-VHF, LN, 9V, 12mA, 40mW, B=50..250, 12GHz	SOT-343	24tc	-	5b	Vs
WF2	-	TSDF1220W	Si-npn	UHF-VHF, LN, 9V, 40mA, 200mW, B=50..150, 12GHz	SOT-343	24tc	-	5b	Vs
WFE	-	BFP93AW	Si-npn	VHF/UHF, 20V, 50mA, 200mW, B=50..200, >6GHz	SOT-343	24tc	-	5b	Vs
WI	-	PT7M6314US47D3	Vdet-IC	4.7V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
WI-	-	3SK197	n-MOSFET	Dual gate, VHF-TV-Tun, 12V, 35mA, Idss=10mA, Up<1V	SOT-143	26fm	-	5c	Ren
WJ	-	PT7M6314US47D4	Vdet-IC	4.7V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
WL	-	R3112Q501C	Vdet-IC	5V±2%, -Reset ODO	SC-82AB	26rp	VD1	5m	Ric
WL	-	R3133Q23EA2	Vdet-IC	2.32V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
WM	-	PT7M6314US48D3	Vdet-IC	4.8V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
WM	-	R3133Q26EA3	Vdet-IC	2.63V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
WMO	-	BF998RW	n-MOSFET	Dual gate, 12V, 30mA, 200mW, Nf=1dB, Idss=20mA, Gf>24mΩ	SOT-343R	24fm	-	5b	Sil
WN	-	PT7M6314US48D4	Vdet-IC	4.8V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
WN	-	R3133Q29EA3	Vdet-IC	2.93V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
WQ	-	PT7M6314US49D3	Vdet-IC	4.9V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
WQ	-	R3133Q43EA8	Vdet-IC	4.38V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
WR	-	PT7M6314US49D4	Vdet-IC	4.9V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
WR	-	R3133Q46EA3	Vdet-IC	4.63V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
WS2	-	S822TW	Si-npn	UHF, LN, 12V, 8mA, 30mW, B=40..150, 5.2GHz	SOT-343	24tc	-	5b	Vs
WSE	-	BFP280TRW	Si-npn	VHF/UHF, LN, 15V, 10mA, 80mW, B=50..150, 5GHz	SOT-343	26tu	-	5b	Vs
WU	-	PT7M6314US50D3	Vdet-IC	5.0V±1.5%, 200ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
WV	-	PT7M6314US50D4	Vdet-IC	5.0V±1.5%, 1570ms, -Restet PPO, -MR	SOT-143	24vdh	VD5	5g	Pti
WX4	-	S594TRW	MMIC	UHF, 8V, 20mA, 160mW, Idss=50..500µA	SOT-343R	26fm	A3	5c	Vs
WX5	-	S595TRW	MMIC	UHF, 8V, 20mA, 200µA, Idss=50..500µA	SOT-343R	26fm	A3	5c	Vs
WX6	-	S504TXRW	MMIC	UHF, 8V, 30mA, 200mW, Idss=7..14mA	SOT-343R	26fm	A3	5c	Vs
WX7	-	S505TXRW	MMIC	UHF, 8V, 30mA, 200mW, Idss=8..16mA	SOT-343R	26fm	A3	5c	Vs
WX8	-	S503TXRW	MMIC	DG, UHF, 8V, 30mA, 200mW, Idss=9..18mA	SOT-343R	26fm	A3	5c	Vs
WY-	-	2SC5820	Si-npn	HF, LN, 12V, 35mA, 100mW, 20GHz, B=70..150	CMPAK-4	26t1	-	5b	Ren
X	gc	ELM7555NCB	Vdet-IC	5.5V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
X	gd	ELM7555CCB	Vdet-IC	5.5V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
X0	-	R3111Q401C	Vdet-IC	4V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
X0	-	RP103Q221D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
X0	-	XC6225B27ANR-G	LVR-IC	LDO, 2.75V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
X03	-	S503TX	MMIC	DG, UHF, 8V, 30mA, 200mW, Idss=9..18mA	SOT-143	24fd	A3	5c	Vs
X04	-	S504TX	MMIC	UHF, 8V, 30mA, 200mW, Idss=7..14mA	SOT-143	24fd	A3	5c	Vs
X05	-	S505TX	MMIC	UHF, 8V, 30mA, 200mW, Idss=8..16mA	SOT-143	24fd	A3	5c	Vs
X1	-	R3111Q411C	Vdet-IC	4.1V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
X1	-	RP103Q161D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
X1	-	XC6225B282NR-G	LVR-IC	LDO, 2.8V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
X2	-	R3111Q421C	Vdet-IC	4.2V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
X2	-	RP103Q141D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
X2	-	XC6223G12BNR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
X2	-	XC6225B28ANR-G	LVR-IC	LDO, 2.85V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
X3	-	R3111Q431C	Vdet-IC	4.3V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
X3	-	RP103Q171D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
X3	-	XC6223G13BNR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
X3	-	XC6225B292NR-G	LVR-IC	LDO, 2.9V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
X3R	-	S593TXR	MMIC	UHF, 8V, 30mA, 200mW, Idss=50..500µA	SOT-143R	26fm	A3	5c	Vs
X4	-	R3111Q441C	Vdet-IC	4.4V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
X4	-	RP103Q241D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	SC-82AB	26vn	VR4	5m	Ric
X4	-	XC6223G14BNR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
X4	-	XC6225B29ANR-G	LVR-IC	LDO, 2.95V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
X4R	-	S594TR	MMIC	UHF, 8V, 20mA, 160mW, Idss=50..500µA	SOT-143R	26fm	A3	5c	Vs

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
X5	-	R3111Q451C	Vdet-IC	4.5V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
X5	-	XC6223G15BNR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
X5	-	XC6225B302NR-G	LVR-IC	LDO, 3.0V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
X5R	-	S595TR	MMIC	UHF, 8V, 20mA, 200µA, Idss=50..500µA	SOT-143R	26fm	A3	5c	Vs
X6	-	R3111Q461C	Vdet-IC	4.6V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
X6	-	XC6223G16BNR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
X6	-	XC6225B30ANR-G	LVR-IC	LDO, 3.05V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
X6R	-	S504TXR	MMIC	UHF, 8V, 30mA, 200mW, Idss=7..14mA	SOT-143R	26fm	A3	5c	Vs
X7	-	R3111Q471C	Vdet-IC	4.7V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
X7	-	XC6223G17BNR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
X7	-	XC6225B312NR-G	LVR-IC	LDO, 3.1V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
X7R	-	S505TXR	MMIC	UHF, 8V, 30mA, 200mW, Idss=8..16mA	SOT-143R	26fm	A3	5c	Vs
X8	-	R3111Q481C	Vdet-IC	4.8V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
X8	-	XC6223G18BNR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
X8	-	XC6225B31ANR-G	LVR-IC	LDO, 3.15V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
X8R	-	S503TXR	MMIC	DG, UHF, 8V, 30mA, 200mW, Idss=9..18mA	SOT-143R	26fm	A3	5c	Vs
X9	-	R3111Q491C	Vdet-IC	4.9V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
X9	-	XC6223G19BNR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
X9	-	XC6225B322NR-G	LVR-IC	LDO, 3.2V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
X93	-	S593TX	MMIC	UHF, 8V, 30mA, 200mW, Idss=50..500µA	SOT-143	24fd	A3	5c	Vs
X94	-	S594T	MMIC	UHF, 8V, 20mA, 160mW, Idss=50..500µA	SOT-143	24fd	A3	5c	Vs
X95	-	S595T	MMIC	UHF, 8V, 20mA, 200µA, Idss=50..500µA	SOT-143	24fd	A3	5c	Vs
XA	-	R3132Q23EC2	Vdet-IC	2.32V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
XA	-	XC6223G20BNR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XA	-	XC6501D221NR-G	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XB	-	R3132Q26EC3	Vdet-IC	2.63V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
XB	-	XC6223G21BNR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XB	-	XC6501D22ANR-G	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XC	-	R3132Q29EC3	Vdet-IC	2.93V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
XC	-	XC6223G22BNR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XC	-	XC6501D231NR-G	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XD	-	R3132Q30EC8	Vdet-IC	3.08V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
XD	-	XC6223G23BNR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XD	-	XC6501D23ANR-G	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XE	-	R3132Q43EC8	Vdet-IC	4.38V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
XE	-	XC6223G24BNR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XE	-	XC6501D241NR-G	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XF	-	R3132Q46EC3	Vdet-IC	4.63V±1.5%, -Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
XF	-	XC6223G25BNR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XF	-	XC6501D24ANR-G	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XH	-	XC6223G26BNR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XH	-	XC6501D251NR-G	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XI-	-	3SK196	n-MOSFET	Dual gate, VHF/UHF-Tuner, 12V, 35mA, Idss=1mA, Up<1.5V	SOT-143	26fm	-	5c	Ren
XK	-	XC6223G27BNR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XK	-	XC6501D25ANR-G	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XL	-	R3133Q23EC2	Vdet-IC	2.32V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
XL	-	XC6223G28BNR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XL	-	XC6501D261NR-G	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XM	-	R3133Q26EC3	Vdet-IC	2.63V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
XM	-	XC6223G29BNR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XM	-	XC6501D26ANR-G	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XN	-	R3133Q29EC3	Vdet-IC	2.93V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
XN	-	XC6223G30BNR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XN	-	XC6501D271NR-G	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XN-	-	2SC4592	Si-npn	UHF/VHF WB-amp, 15V, 50mA, 150mW, 9.5GHz, B=40..250	SOT-143	26tu	-	5b	Ren
XP	-	R3133Q30EC8	Vdet-IC	3.08V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
XP	-	XC6223G31BNR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XP	-	XC6501D27ANR-G	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XP-	-	2SC5594	Si-npn	HF, LN, 12V, 35mA, 100mW, 24GHz, B=60..140	CMPAK-4	26t1	-	5b	Ren
XQ	-	R3133Q43EC8	Vdet-IC	4.38V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
XR	-	R3133Q46EC3	Vdet-IC	4.63V±1.5%, +Reset ODO, -MR	SOT-143	24vdh	VD4	5m	Ric
XR	-	XC6223G32BNR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XR	-	XC6501D281NR-G	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XS	-	XC6223G33BNR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XS	-	XC6501D28ANR-G	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XS-	-	3SK229	n-FET	GaAs, Dual gate, UHF-TV-Tuner, 12V, 80mA, Idss=15..40mA, Up<3.5V	SOT-143	26fm	-	5c	Ren
XT	-	XC6223G34BNR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XT	-	XC6501D291NR-G	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XU	-	XC6223G35BNR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XU	-	XC6501D29ANR-G	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XV	-	XC6223G36BNR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XV	-	XC6501D301NR-G	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XV-	-	3SK309	n-FET	GaAs, Dual gate, UHF, 6V, 18mA, Idss=25..60mA, Up=0.2..1.5V	SOT-143	26fm	-	5c	Ren
XW-	-	3SK233	n-MOSFET	Dual gate, UHF-TV-Tuner, 12V, 35mA, Idss=0..2mA, Up<0.8V	SOT-143	26fm	-	5c	Ren
XX	-	XC6223G37BNR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XX	-	XC6501D30ANR-G	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XX-	-	3SK234	n-MOSFET	Dual gate, VHF-TV-Tuner, 12V, 35mA, Idss=0..1mA, U=0..1V	SOT-143	26fm	-	5c	Ren
XY	-	XC6223G38BNR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XY	-	XC6501D311NR-G	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
XZ	-	XC6223G39BNR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
XZ	-	XC6501D31ANR-G	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
Y	gc	ELM7514NCB	Vdet-IC	1.4V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
Y	gd	ELM7514CCB	Vdet-IC	1.4V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
Y0	-	R3111Q501C	Vdet-IC	5V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
Y0	-	XC6225A32ANR-G	LVR-IC	LDO, 3.25V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Y1	-	R3111Q511C	Vdet-IC	5.1V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
Y1	-	XC6225A332NR-G	LVR-IC	LDO, 3.3V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Y2	-	R3111Q521C	Vdet-IC	5.2V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
Y2	-	XC6223H12BNR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
Y2	-	XC6225A33ANR-G	LVR-IC	LDO, 3.35V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Y3	-	R3111Q531C	Vdet-IC	5.3V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
Y3	-	XC6223H13BNR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
Y3	-	XC6225A342NR-G	LVR-IC	LDO, 3.4V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Y4	-	R3111Q541C	Vdet-IC	5.4V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
Y4	-	XC6223H14BNR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
Y4	-	XC6225A34ANR-G	LVR-IC	LDO, 3.45V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Y5	-	R3111Q551C	Vdet-IC	5.5V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
Y5	-	XC6223H15BNR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
Y5	-	XC6225A352NR-G	LVR-IC	LDO, 3.5V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Y6	-	R3111Q561C	Vdet-IC	5.6V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
Y6	-	XC6223H16BNR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
Y6	-	XC6225A35ANR-G	LVR-IC	LDO, 3.55V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Y7	-	R3111Q571C	Vdet-IC	5.7V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
Y7	-	XC6223H17BNR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
Y7	-	XC6225A362NR-G	LVR-IC	LDO, 3.6V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Y8	-	R3111Q581C	Vdet-IC	5.8V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
Y8	-	XC6223H18BNR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
Y8	-	XC6225A36ANR-G	LVR-IC	LDO, 3.65V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Y9	-	R3111Q591C	Vdet-IC	5.9V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
Y9	-	XC6223H19BNR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
Y9	-	XC6225A372NR-G	LVR-IC	LDO, 3.7V±2%, 30mA, +CE	SSOT-24	26vn	VR4	5a	Tor
YA	-	BU4209F	Vdet-IC	0.9V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YA	-	XC6223H20BNR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YA	-	XC6501D321NR-G	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YA-	-	2SC4791	Si-npn	VHF/UHF, 15V, 20mA, 150mW, B=50..250, 10GHz	MPAK-4	26tu	-	5b	Ren
YB	-	BU4210F	Vdet-IC	1.0V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YB	-	XC6223H21BNR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YB	-	XC6501D32ANR-G	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YC	-	BU4211F	Vdet-IC	1.1V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YC	-	XC6223H22BNR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YC	-	XC6501D331NR-G	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YD	-	BU4212F	Vdet-IC	1.2V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YD	-	XC6223H23BNR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YD	-	XC6501D33ANR-G	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YD-	-	2SC4926	Si-npn	VHF/UHF, 15V, 50mA, 11GHz	SOT-143	26tu	-	5c	Ren
YD-	-	2SC4995	Si-npn	VHF/UHF, 15V, 50mA, 100mW, B=50..250, 11GHz	CMPAK-4	26tu	-	5b	Ren
YE	-	BU4213F	Vdet-IC	1.3V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YE	-	XC6223H24BNR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YE	-	XC6501D341NR-G	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YF	-	BU4214F	Vdet-IC	1.4V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YF	-	XC6223H25BNR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YF	-	XC6501D34ANR-G	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YG	-	BU4215F	Vdet-IC	1.5V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YH	-	BU4216F	Vdet-IC	1.6V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YH	-	XC6223H26BNR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YH	-	XC6501D351NR-G	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YJ	-	BU4217F	Vdet-IC	1.7V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YJ-	-	2SC4900	Si-npn	VHF/UHF, 15V, 20mA, 100mW, 9GHz, B=50..250	SOT-143	26tu	-	5c	Ren
YK	-	BU4218F	Vdet-IC	1.8V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YK	-	XC6223H27BNR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
YK	-	XC6501D35ANR-G	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YL	-	BU4219F	Vdet-IC	1.9V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YL	-	XC6223H28BNR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YL	-	XC6501D361NR-G	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YM	-	BU4220F	Vdet-IC	2.0V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YM	-	XC6223H29BNR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YM	-	XC6501D36ANR-G	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YN	-	BU4221F	Vdet-IC	2.1V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YN	-	XC6223H30BNR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YN	-	XC6501D371NR-G	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YP	-	BU4222F	Vdet-IC	2.2V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YP	-	R3133Q30EA8	Vdet-IC	3.08V±1.5%, +Reset PPO, -MR	SOT-143	24vdh	VD5	5m	Ric
YP	-	XC6223H31BNR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YP	-	XC6501D37ANR-G	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YQ	-	BU4223F	Vdet-IC	2.3V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YR	-	BU4224F	Vdet-IC	2.4V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YR	-	XC6223H32BNR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YR	-	XC6501D381NR-G	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YR-	-	2SC4991	Si-npn	VHF/UHF, 15V, 50mA, 9.5GHz	SOT-143	26tu	-	5c	Ren
YS	-	BU4225F	Vdet-IC	2.5V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YS	-	XC6223H33BNR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YS	-	XC6501D38ANR-G	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YS-	-	2SC4993	Si-npn	VHF/UHF, 15V, 20mA, 150mW, B=50..250, 10.5GHz	MPAK-4	26tu	-	5b	Ren
YS-	-	2SC4994	Si-npn	VHF/UHF, 15V, 20mA, 100mW, B=50..250, 10.5GHz	CMPAK-4	26tu	-	5b	Ren
YT	-	BU4226F	Vdet-IC	2.6V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YT	-	XC6223H34BNR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YT	-	XC6501D391NR-G	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YU	-	BU4227F	Vdet-IC	2.7V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YU	-	XC6223H35BNR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YU	-	XC6501D39ANR-G	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YV	-	BU4228F	Vdet-IC	2.8V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YV	-	XC6223H36BNR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YV	-	XC6501D401NR-G	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YW	-	BU4229F	Vdet-IC	2.9V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YX	-	BU4230F	Vdet-IC	3.0V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YX	-	XC6223H37BNR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YX	-	XC6501D40ANR-G	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YY	-	BU4231F	Vdet-IC	3.1V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YY	-	XC6223H38BNR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YY	-	XC6501D411NR-G	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
YZ	-	BU4232F	Vdet-IC	3.2V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
YZ	-	XC6223H39BNR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
YZ	-	XC6501D41ANR-G	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
Z	gc	ELM7515NCB	Vdet-IC	1.5V±2%, +Reset ODO	SC-82AB	26vdl	VD6	5c	Elm
Z	gd	ELM7515CCB	Vdet-IC	1.5V±2%, +Reset PPO	SC-82AB	26vdl	VD7	5c	Elm
Z0	-	R3111Q601C	Vdet-IC	6V±2%, -Reset ODO	SC-82AB	26vdl	VD6	5m	Ric
Z0	-	XC6224A20BNR	LVR-IC	LDO, 2.05V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Z0	-	XC6225B32ANR-G	LVR-IC	LDO, 3.25V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
Z1	-	XC6224A21BNR	LVR-IC	LDO, 2.15V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Z1	-	XC6225B332NR-G	LVR-IC	LDO, 3.3V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
Z2	-	XC6224A22BNR	LVR-IC	LDO, 2.25V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Z2	-	XC6225B33ANR-G	LVR-IC	LDO, 3.35V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
Z3	-	XC6224A23BNR	LVR-IC	LDO, 2.25V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Z3	-	XC6225B342NR-G	LVR-IC	LDO, 3.4V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
Z4	-	XC6224A24BNR	LVR-IC	LDO, 2.45V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Z4	-	XC6225B34ANR-G	LVR-IC	LDO, 3.45V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
Z5	-	XC6224A25BNR	LVR-IC	LDO, 2.55V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Z5	-	XC6225B352NR-G	LVR-IC	LDO, 3.5V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
Z6	-	XC6224A26BNR	LVR-IC	LDO, 2.65V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Z6	-	XC6225B35ANR-G	LVR-IC	LDO, 3.55V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
Z7	-	XC6224A27BNR	LVR-IC	LDO, 2.75V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Z7	-	XC6225B362NR-G	LVR-IC	LDO, 3.6V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
Z8	-	XC6224A28BNR	LVR-IC	LDO, 2.85V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Z8	-	XC6225B36ANR-G	LVR-IC	LDO, 3.65V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
Z9	-	XC6224A29BNR	LVR-IC	LDO, 2.95V±1.5%, 150mA, +CE	SSOT-24	26vn	VR4	5a	Tor
Z9	-	XC6225B372NR-G	LVR-IC	LDO, 3.7V±2%, 30mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
ZA	-	BU4233F	Vdet-IC	3.3V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
ZA	-	XC6501D421NR-G	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ZB	-	BU4234F	Vdet-IC	3.4V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
ZB	-	XC6501D42ANR-G	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ZC	-	BU4235F	Vdet-IC	3.5V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
ZC	-	XC6501D431NR-G	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ZC-	-	2SC5078	Si-npn	VHF/UHF, LN, 15V, 20mA, 150mW, B=50..160, 12GHz	MPAK-4	26tu	-	5b	Ren
ZC-	-	2SC5079	Si-npn	VHF/UHF, LN, 15V, 20mA, 100mW, B=50..160, 12GHz	CMPAK-4	26tu	-	5b	Ren
ZD	-	BU4236F	Vdet-IC	3.6V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
ZD	-	XC6223H301NR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
ZD	-	XC6501D43ANR-G	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ZD-	-	2SC5080	Si-npn	VHF/UHF, LN, 15V, 50mA, 150mW, B=50..160, 13.5GHz	MPAK-4	26tu	-	5b	Ren
ZD-	-	2SC5081	Si-npn	VHF/UHF, LN, 15V, 50mA, 100mW, B=50..160, 13.5GHz	CMPAK-4	26tu	-	5b	Ren
ZE	-	BU4237F	Vdet-IC	3.7V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
ZE	-	XC6223H311NR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
ZE	-	XC6501D441NR-G	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ZF	-	BU4238F	Vdet-IC	3.8V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
ZF	-	XC6223H321NR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
ZF	-	XC6501D44ANR-G	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ZG	-	BU4239F	Vdet-IC	3.9V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
ZG-	-	3SK276	n-MOSFET	Dual gate, VHF/UHF, 12V, 25mA, Idss=0.5..10mA, Up<0.8V	SOT-143	26fm	-	5c	Ren
ZH	-	BU4240F	Vdet-IC	4.0V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
ZH	-	XC6223H331NR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
ZH	-	XC6501D451NR-G	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ZH-	-	3SK288	n-MOSFET	Dual gate, VHF, 12V, 25mA, Idss=1..10mA, Up<1V	SOT-143	26fm	-	5c	Ren
ZJ	-	BU4241F	Vdet-IC	4.1V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
ZJ-	-	3SK290	n-MOSFET	Dual gate, UHF, 12V, 25mA, Idss=0.5..10mA, Up<1V	SOT-343	26fm	-	5c	Ren
ZK	-	BU4242F	Vdet-IC	4.2V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
ZK	-	XC6223H341NR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
ZK	-	XC6501D45ANR-G	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ZL	-	BU4243F	Vdet-IC	4.3V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
ZL	-	XC6223H351NR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
ZL	-	XC6501D461NR-G	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ZM	-	BU4244F	Vdet-IC	4.4V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
ZM	-	XC6223H361NR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
ZM	-	XC6501D46ANR-G	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ZN	-	BU4245F	Vdet-IC	4.5V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
ZN	-	XC6501D471NR-G	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ZP	-	BU4246F	Vdet-IC	4.6V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
ZP	-	XC6223H371NR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
ZP	-	XC6501D47ANR-G	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ZP-	-	3SK298	n-MOSFET	Dual gate, UHF/VHF RF, 12V, 25mA, 100mW, NF=1dB(200MHz)	CMPAK-4	26fm	-	5b	Ren
ZQ	-	BU4247F	Vdet-IC	4.7V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
ZQ-	-	3SK295	n-MOSFET	Dual gate, UHF, 12V, 25mA, Up<1V	SOT-143	26fm	-	5c	Ren
ZR	-	BU4248F	Vdet-IC	4.8V±1%, -Reset ODO	SOP-4	23vdf	VD1	5n	Rhm
ZR	-	XC6223H381NR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
ZR	-	XC6501D481NR-G	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ZR-	-	3SK300	n-MOSFET	Dual gate, VHF/UHF, 14V, 25mA, Up<1V, F<4dB(900MHz)	SOT-143	26fm	-	5c	Ren
ZS	-	BU4309F	Vdet-IC	0.9V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
ZS	-	XC6223H391NR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
ZS	-	XC6501D48ANR-G	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ZT	-	BU4310F	Vdet-IC	1.0V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
ZT	-	XC6223H401NR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL, PDR, ICP	SSOT-24	26vn	VR4	5a	Tor
ZT	-	XC6501D491NR-G	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ZU	-	BU4311F	Vdet-IC	1.1V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
ZU	-	XC6501D49ANR-G	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ZV	-	BU4312F	Vdet-IC	1.2V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
ZV	-	XC6501D501NR-G	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL, PDR	SSOT-24	26vn	VR4	5a	Tor
ZW	-	BU4313F	Vdet-IC	1.3V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
ZX	-	BU4314F	Vdet-IC	1.4V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
ZX	-	XC6221B48BNR	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
ZY	-	BU4315F	Vdet-IC	1.5V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm
ZY	-	XC6221B49BNR	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, CL	SSOT-24	26vn	VR4	5a	Tor
ZZ	-	BU4316F	Vdet-IC	1.6V±1%, -Reset PPO	SOP-4	23vdf	VD3	5n	Rhm







SECTION 7
5-pin case SMD semiconductor components

0
1
2
3
4
5
6
7
8
9
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
+ACAB	-	MAX999EUK-T	Comp-IC	U-High Speed, Vcc=2.7..5.5V, Icco=5mA, <5ns	SOT-23-5	28opa	OP1	6k	Max
+AFEI	-	MAX999AAUK+T	Comp-IC	U-High Speed, Vcc=2.7..5.5V, Icco=5mA, <5ns	SOT-23-5	28opa	OP1	6k	Max
00	-	R1223N252A	DC-DC-IC	PWM/VFM step-down, +CE, 2.5V±2%, 300kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
00	-	RN5RF50BA	LVR-IC	LRip, +CE, 5V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
00	-	RN5RZ50BA	LVR-IC	LDO, LN, 5V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
000	ej	XC6101A131MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
001	ej	XC6101A132MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
002	ej	XC6101A133MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
003	ej	XC6101A134MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
004	ej	XC6101A135MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
005	ej	XC6101A136MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
006	ej	XC6101A137MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
007	ej	XC6101A138MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
008	-	R1160N081A	LVR-IC	LDO, 0.8V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
008	ej	XC6101A139MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
009	-	R1160N091A	LVR-IC	LDO, 0.9V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
009	ej	XC6101A140MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00A	ej	XC6101A141MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00B	ej	XC6101A142MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00C	ej	XC6101A143MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00D	ej	XC6101A144MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00E	-	XC6505A151MR	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
00E	ej	XC6101A145MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00F	-	XC6505A161MR	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
00F	ec	XC6101A116MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00F	ej	XC6101A146MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00H	-	XC6505A171MR	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
00H	ec	XC6101A117MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00H	ej	XC6101A147MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00K	-	XC6505A181MR	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
00K	ec	XC6101A118MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00K	ej	XC6101A148MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00L	-	XC6505A191MR	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
00L	ec	XC6101A119MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00L	ej	XC6101A149MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00M	-	XC6505A201MR	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
00M	ec	XC6101A120MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00M	ej	XC6101A150MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00N	-	XC6505A211MR	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
00N	ec	XC6101A121MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00P	-	XC6505A221MR	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
00P	ec	XC6101A122MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00R	-	XC6505A231MR	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
00R	ec	XC6101A123MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00S	-	XC6505A241MR	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
00S	ec	XC6101A124MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00T	-	XC6505A251MR	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
00T	ec	XC6101A125MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00U	-	XC6505A261MR	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
00U	ec	XC6101A126MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00V	-	XC6505A271MR	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
00V	ec	XC6101A127MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00X	-	XC6505A281MR	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
00X	ec	XC6101A128MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00Y	-	XC6505A291MR	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
00Y	ec	XC6101A129MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
00Z	-	XC6505A301MR	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
00Z	ec	XC6101A130MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01	-	R1223N152C	DC-DC-IC	PWM step-down, +CE, 1.5V±2%, 300kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
01	-	RN5RF51BA	LVR-IC	LRip, +CE, 5.1V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
01	-	RN5RZ51BA	LVR-IC	LDO, LN, 5.1V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
010	-	R1160N101A	LVR-IC	LDO, 1.0V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
010	-	XC6505A311MR	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
010	ej	XC6101A231MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
011	-	R1160N111A	LVR-IC	LDO, 1.1V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
011	-	XC6505A321MR	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
011	ej	XC6101A232MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
012	-	R1160N121A	LVR-IC	LDO, 1.2V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
012	-	XC6505A331MR	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
012	ej	XC6101A233MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
013	-	R1160N131A	LVR-IC	LDO, 1.3V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
013	-	XC6505A341MR	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
013	ej	XC6101A234MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
014	-	R1160N141A	LVR-IC	LDO, 1.4V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
014	-	XC6505A351MR	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
014	ej	XC6101A235MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
015	-	R1116N151B	LVR-IC	LDO, Low noise, 1.5V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
015	-	R1160N151A	LVR-IC	LDO, 1.5V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
015	-	XC6505A361MR	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
015	ej	XC6101A236MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
016	-	R1116N161B	LVR-IC	LDO, Low noise, 1.6V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
016	-	R1160N161A	LVR-IC	LDO, 1.6V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
016	-	XC6505A371MR	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
016	ej	XC6101A237MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
017	-	R1116N171B	LVR-IC	LDO, Low noise, 1.7V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
017	-	R1160N171A	LVR-IC	LDO, 1.7V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
017	-	XC6505A381MR	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
017	ej	XC6101A238MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
018	-	R1116N181B	LVR-IC	LDO, Low noise, 1.8V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
018	-	R1160N181A	LVR-IC	LDO, 1.8V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
018	-	XC6505A391MR	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
018	ej	XC6101A239MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
019	-	R1116N191B	LVR-IC	LDO, Low noise, 1.9V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
019	-	R1160N191A	LVR-IC	LDO, 1.9V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
019	-	XC6505A401MR	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
019	ej	XC6101A240MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01A	-	APR3001-15B	Vdet-IC	1.5V±1.5%, -Reset PPO	SOT-23-5	28vdm	VD7	6kd	Anp
01A	-	XC6505A411MR	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
01A	ej	XC6101A241MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01B	-	APR3001-17B	Vdet-IC	1.75V±1.5%, -Reset PPO	SOT-23-5	28vdm	VD7	6kd	Anp
01B	-	XC6505A421MR	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
01B	ej	XC6101A242MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01C	-	APR3001-23B	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23-5	28vdm	VD7	6k	Anp
01C	-	R1182N121B	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
01C	-	XC6505A431MR	LVR-IC	LDO, 4.3V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
01C	ej	XC6101A243MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01D	-	APR3001-26B	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23-5	28vdm	VD7	6k	Anp
01D	-	R1182N131B	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
01D	-	XC6505A441MR	LVR-IC	LDO, 4.4V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
01D	ej	XC6101A244MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01E	-	APR3001-29B	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23-5	28vdm	VD7	6k	Anp
01E	-	R1182N141B	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
01E	-	XC6505A451MR	LVR-IC	LDO, 4.5V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
01E	ej	XC6101A245MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01F	-	APR3001-30B	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23-5	28vdm	VD7	6kd	Anp
01F	-	R1182N151B	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
01F	-	XC6505A461MR	LVR-IC	LDO, 4.6V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
01F	ec	XC6101A216MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01F	ej	XC6101A246MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01G	-	APR3001-39B	Vdet-IC	3.9V±1.5%, -Reset PPO	SOT-23-5	28vdm	VD7	6kd	Anp
01G	-	R1182N161B	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
01H	-	APR3001-43B	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23-5	28vdm	VD7	6kd	Anp
01H	-	R1182N171B	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
01H	-	XC6505A471MR	LVR-IC	LDO, 4.7V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
01H	ec	XC6101A217MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01H	ej	XC6101A247MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01J	-	APR3001-46B	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23-5	28vdm	VD7	6kd	Anp
01J	-	R1182N181B	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
01K	-	R1182N191B	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
01K	-	XC6505A481MR	LVR-IC	LDO, 4.8V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
01K	ec	XC6101A218MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01K	ej	XC6101A248MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01L	-	XC6505A491MR	LVR-IC	LDO, 4.9V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
01L	ec	XC6101A219MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01L	ej	XC6101A249MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01M	-	XC6505A501MR	LVR-IC	LDO, 5.0V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
01M	ec	XC6101A220MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01M	ej	XC6101A250MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01N	ec	XC6101A221MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01P	ec	XC6101A222MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
01R	ec	XC6101A223MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01S	ec	XC6101A224MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01T	ec	XC6101A225MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01U	ec	XC6101A226MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01V	ec	XC6101A227MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01X	ec	XC6101A228MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01Y	ec	XC6101A229MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
01Z	ec	XC6101A230MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02	-	R1223N182C	DC-DC-IC	PWM step-down, +CE, 1.8V±2%, 300kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
02	-	RN5RF52BA	LVR-IC	LRip, +CE, 5.2V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
02	-	RN5RZ52BA	LVR-IC	LDO, LN, 5.2V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
020	-	R1116N201B	LVR-IC	LDO, Low noise, 2.0V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
020	-	R1160N201A	LVR-IC	LDO, 2.0V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
020	-	XC6505A611MR	LVR-IC	LDO, 6.1V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
020	ej	XC6101A331MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
021	-	R1116N211B	LVR-IC	LDO, Low noise, 2.1V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
021	-	R1160N211A	LVR-IC	LDO, 2.1V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
021	-	XC6505A621MR	LVR-IC	LDO, 6.2V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
021	ej	XC6101A332MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
022	-	R1116N221B	LVR-IC	LDO, Low noise, 2.2V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
022	-	R1160N221A	LVR-IC	LDO, 2.2V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
022	-	XC6505A631MR	LVR-IC	LDO, 6.3V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
022	ej	XC6101A333MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
023	-	R1116N231B	LVR-IC	LDO, Low noise, 2.3V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
023	-	R1160N231A	LVR-IC	LDO, 2.3V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
023	-	XC6505A641MR	LVR-IC	LDO, 6.4V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
023	ej	XC6101A334MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
024	-	R1116N241B	LVR-IC	LDO, Low noise, 2.4V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
024	-	R1160N241A	LVR-IC	LDO, 2.4V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
024	-	XC6505A651MR	LVR-IC	LDO, 6.5V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
024	ej	XC6101A335MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
024A	-	HT7024A-1	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Htk
025	-	R1116N251B	LVR-IC	LDO, Low noise, 2.5V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
025	-	R1160N251A	LVR-IC	LDO, 2.5V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
025	-	XC6505A661MR	LVR-IC	LDO, 6.6V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
025	ej	XC6101A336MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
026	-	R1116N261B	LVR-IC	LDO, Low noise, 2.6V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
026	-	R1160N261A	LVR-IC	LDO, 2.6V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
026	-	XC6505A671MR	LVR-IC	LDO, 6.7V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
026	ej	XC6101A337MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
027	-	R1116N271B	LVR-IC	LDO, Low noise, 2.7V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
027	-	R1160N271A	LVR-IC	LDO, 2.7V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
027	-	XC6505A681MR	LVR-IC	LDO, 6.8V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
027	ej	XC6101A338MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
027A	-	HT7027A-1	Vdet-IC	2.7V±2%,-Reset ODO	SOT-23-5	28vdm	VD6	6a	Htk
028	-	R1116N281B	LVR-IC	LDO, Low noise, 2.8V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
028	-	R1160N281A	LVR-IC	LDO, 2.8V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
028	-	XC6505A691MR	LVR-IC	LDO, 6.9V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
028	ej	XC6101A339MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
029	-	R1116N291B	LVR-IC	LDO, Low noise, 2.9V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
029	-	R1160N291A	LVR-IC	LDO, 2.9V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
029	-	XC6505A701MR	LVR-IC	LDO, 7.0V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
029	ej	XC6101A340MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02A	-	APR3002-15B	Vdet-IC	1.5V±1.5%, +Reset PPO	SOT-23-5	28vdm	VD7	6kd	Anp
02A	-	R1182N201B	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
02A	ej	XC6101A341MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02B	-	APR3002-17B	Vdet-IC	1.75V±1.5%, +Reset PPO	SOT-23-5	28vdm	VD7	6k	Anp
02B	-	R1182N211B	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
02B	ej	XC6101A342MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02C	-	APR3002-23B	Vdet-IC	2.32V±1.5%, +Reset PPO	SOT-23-5	28vdm	VD7	6k	Anp
02C	-	R1182N221B	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
02C	ej	XC6101A343MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02D	-	APR3002-26B	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23-5	28vdm	VD7	6kd	Anp
02D	-	R1182N231B	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
02D	ej	XC6101A344MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02E	-	APR3002-29B	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23-5	28vdm	VD7	6kd	Anp
02E	-	R1182N241B	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
02E	ej	XC6101A345MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02F	-	APR3002-30B	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23-5	28vdm	VD7	6kd	Anp
02F	-	R1182N251B	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
02F	ec	XC6101A316MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02F	ej	XC6101A346MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02G	-	APR3002-39B	Vdet-IC	3.9V±1.5%, +Reset PPO	SOT-23-5	28vdm	VD7	6k	Anp
02G	-	R1182N261B	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
02H	-	APR3002-43B	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23-5	28vdm	VD7	6kd	Anp
02H	-	R1182N271B	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
02H	ec	XC6101A317MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02H	ej	XC6101A347MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02J	-	APR3002-46B	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23-5	28vdm	VD7	6kd	Anp
02J	-	R1182N281B	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
02K	-	R1182N291B	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
02K	ec	XC6101A318MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02K	ej	XC6101A348MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02L	ec	XC6101A319MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02L	ej	XC6101A349MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02M	ec	XC6101A320MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02M	ej	XC6101A350MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02N	-	XC6505A511MR	LVR-IC	LDO, 5.1V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
02N	ec	XC6101A321MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02P	-	XC6505A521MR	LVR-IC	LDO, 5.2V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
02P	ec	XC6101A322MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02R	-	XC6505A531MR	LVR-IC	LDO, 5.3V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
02R	ec	XC6101A323MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02S	-	XC6505A541MR	LVR-IC	LDO, 5.4V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
02S	ec	XC6101A324MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02T	-	XC6505A551MR	LVR-IC	LDO, 5.5V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
02T	ec	XC6101A325MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02U	-	XC6505A561MR	LVR-IC	LDO, 5.6V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
02U	ec	XC6101A326MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02V	-	XC6505A571MR	LVR-IC	LDO, 5.7V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
02V	ec	XC6101A327MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02X	-	XC6505A581MR	LVR-IC	LDO, 5.8V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
02X	ec	XC6101A328MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02Y	-	XC6505A591MR	LVR-IC	LDO, 5.9V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
02Y	ec	XC6101A329MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
02Z	-	XC6505A601MR	LVR-IC	LDO, 6.0V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
02Z	ec	XC6101A330MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03	-	R1223N252C	DC-DC-IC	PWM step-down, +CE, 2.5V±2%, 300kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
03	-	RN5RF53BA	LVR-IC	LRip, +CE, 5.3V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
03	-	RN5RZ53BA	LVR-IC	LDO, LN, 5.3V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
030	-	R1116N301B	LVR-IC	LDO, Low noise, 3.0V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
030	-	R1160N301A	LVR-IC	LDO, 3.0V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
030	ej	XC6101A431MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
031	-	R1116N311B	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
031	-	R1160N311A	LVR-IC	LDO, 3.1V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
031	ej	XC6101A432MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
032	-	R1116N321B	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
032	-	R1160N321A	LVR-IC	LDO, 3.2V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
032	ej	XC6101A433MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
033	-	R1116N331B	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
033	-	R1160N331A	LVR-IC	LDO, 3.3V±2%, 200mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
033	ej	XC6101A434MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
033A	-	HT7033A-1	Vdet-IC	3.3V±2%,-Reset ODO	SOT-23-5	28vdm	VD6	6a	Htk
034	-	R1116N341B	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
034	ej	XC6101A435MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
035	-	R1116N351B	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
035	ej	XC6101A436MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
036	-	R1116N361B	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
036	ej	XC6101A437MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
037	-	R1116N371B	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
037	ej	XC6101A438MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
038	-	R1116N381B	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
038	ej	XC6101A439MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
039	-	R1116N391B	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
039	ej	XC6101A440MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
039A	-	HT7039A-1	Vdet-IC	3.9V±2%,-Reset ODO	SOT-23-5	28vdm	VD6	6a	Htk
03A	-	APR3003-15B	Vdet-IC	1.5V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6k	Anp
03A	-	R1182N301B	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
03A	-	XC6505A711MR	LVR-IC	LDO, 7.1V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
03A	ej	XC6101A441MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
03B	-	APR3003-17B	Vdet-IC	1.75V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6kd	Anp
03B	-	R1182N311B	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
03B	-	XC6505A721MR	LVR-IC	LDO, 7.2V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
03B	ej	XC6101A442MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03C	-	APR3003-23B	Vdet-IC	2.32V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6kd	Anp
03C	-	R1182N321B	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
03C	-	XC6505A731MR	LVR-IC	LDO, 7.3V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
03C	ej	XC6101A443MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03D	-	APR3003-26B	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6kd	Anp
03D	-	R1182N331B	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
03D	-	XC6505A741MR	LVR-IC	LDO, 7.4V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
03D	ej	XC6101A444MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03E	-	APR3003-29B	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6kd	Anp
03E	-	R1182N341B	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
03E	-	XC6505A751MR	LVR-IC	LDO, 7.5V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
03E	ej	XC6101A445MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03F	-	APR3003-30B	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6kd	Anp
03F	-	R1182N351B	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
03F	-	XC6505A761MR	LVR-IC	LDO, 7.6V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
03F	ec	XC6101A416MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03F	ej	XC6101A446MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03G	-	APR3003-39B	Vdet-IC	3.9V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6k	Anp
03G	-	R1182N361B	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
03H	-	APR3003-43B	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6k	Anp
03H	-	R1182N371B	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
03H	-	XC6505A771MR	LVR-IC	LDO, 7.7V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
03H	ec	XC6101A417MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03H	ej	XC6101A447MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03J	-	APR3003-46B	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6kd	Anp
03J	-	R1182N381B	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
03K	-	R1182N391B	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
03K	-	XC6505A781MR	LVR-IC	LDO, 7.8V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
03K	ec	XC6101A418MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03K	ej	XC6101A448MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03L	-	R1182N401B	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
03L	-	XC6505A791MR	LVR-IC	LDO, 7.9V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
03L	ec	XC6101A419MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03L	ej	XC6101A449MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03M	-	R1182N121B5	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
03M	-	XC6505A801MR	LVR-IC	LDO, 8.0V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
03M	ec	XC6101A420MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03M	ej	XC6101A450MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03N	-	R1182N181B5	LVR-IC	LDO, 1.85V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
03N	ec	XC6101A421MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03P	-	R1182N291B5	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
03P	ec	XC6101A422MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03R	ec	XC6101A423MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03S	ec	XC6101A424MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03T	ec	XC6101A425MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03U	ec	XC6101A426MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03V	ec	XC6101A427MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03X	ec	XC6101A428MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03Y	ec	XC6101A429MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
03Z	ec	XC6101A430MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04	-	R1223N302C	DC-DC-IC	PWM step-down, +CE, 3V±2%, 300kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
04	-	RN5RF54BA	LVR-IC	LRip, +CE, 5.4V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
04	-	RN5RZ54BA	LVR-IC	LDO, LN, 5.4V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
040	-	R1116N401B	LVR-IC	LDO, Low noise, 4.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
040	ej	XC6101A531MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
041	-	R1116N181B5	LVR-IC	LDO, Low noise, 1.85V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
041	ej	XC6101A532MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
042	-	R1116N281B5	LVR-IC	LDO, Low noise, 2.85V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
042	ej	XC6101A533MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
043	ej	XC6101A534MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
044	ej	XC6101A535MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
044A	-	HT7044A-1	Vdet-IC	4.4V±2%,-Reset ODO	SOT-23-5	28vdm	VD6	6a	Htk
045	ej	XC6101A536MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
046	ej	XC6101A537MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
047	ej	XC6101A538MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
048	ej	XC6101A539MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
049	ej	XC6101A540MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04A	ej	XC6101A541MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04B	ej	XC6101A542MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04C	ej	XC6101A543MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04D	ej	XC6101A544MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04E	-	XC6505C151MR	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
04E	ej	XC6101A545MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04F	-	XC6505C161MR	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
04F	ec	XC6101A516MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04F	ej	XC6101A546MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04H	-	XC6505C171MR	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
04H	ec	XC6101A517MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04H	ej	XC6101A547MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04K	-	XC6505C181MR	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
04K	ec	XC6101A518MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04K	ej	XC6101A548MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04L	-	XC6505C191MR	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
04L	ec	XC6101A519MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04L	ej	XC6101A549MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04M	-	XC6505C201MR	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
04M	ec	XC6101A520MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04M	ej	XC6101A550MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04N	-	XC6505C211MR	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
04N	ec	XC6101A521MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04P	-	XC6505C221MR	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
04P	ec	XC6101A522MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04R	-	XC6505C231MR	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
04R	ec	XC6101A523MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04S	-	XC6505C241MR	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
04S	ec	XC6101A524MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04T	-	XC6505C251MR	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
04T	ec	XC6101A525MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04U	-	XC6505C261MR	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
04U	ec	XC6101A526MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04V	-	XC6505C271MR	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
04V	ec	XC6101A527MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04X	-	XC6505C281MR	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
04X	ec	XC6101A528MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04Y	-	XC6505C291MR	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
04Y	ec	XC6101A529MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
04Z	-	XC6505C301MR	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
04Z	ec	XC6101A530MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05	-	R1223N332C	DC-DC-IC	PWM step-down, +CE, 3.3V±2%, 300kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
05	-	RN5RF55BA	LVR-IC	LRip, +CE, 5.5V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
05	-	RN5RZ55BA	LVR-IC	LDO, LN, 5.5V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
050	-	XC6505C311MR	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
050	ej	XC6101A631MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
050A	-	HT7050A-1	Vdet-IC	5.0V±2%,-Reset ODO	SOT-23-5	28vdm	VD6	6a	Htk
051	-	XC6505C321MR	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
051	ej	XC6101A632MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
052	-	XC6505C331MR	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
052	ej	XC6101A633MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
053	-	XC6505C341MR	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
053	ej	XC6101A634MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
054	-	XC6505C351MR	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
054	ej	XC6101A635MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
055	-	XC6505C361MR	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
055	ej	XC6101A636MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
056	-	XC6505C371MR	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
056	ej	XC6101A637MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
057	-	XC6505C381MR	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
057	ej	XC6101A638MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
058	-	XC6505C391MR	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
058	ej	XC6101A639MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
059	-	XC6505C401MR	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
059	ej	XC6101A640MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05A	-	XC6505C411MR	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
05A	ej	XC6101A641MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05B	-	XC6505C421MR	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
05B	ej	XC6101A642MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
05C	-	XC6505C431MR	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
05C	ej	XC6101A643MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05D	-	XC6505C441MR	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
05D	ej	XC6101A644MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05E	-	XC6505C451MR	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
05E	ej	XC6101A645MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05F	-	XC6505C461MR	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
05F	ec	XC6101A616MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05F	ej	XC6101A646MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05H	-	XC6505C471MR	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
05H	ec	XC6101A617MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05H	ej	XC6101A647MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05K	-	XC6505C481MR	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
05K	ec	XC6101A618MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05K	ej	XC6101A648MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05L	-	XC6505C491MR	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
05L	ec	XC6101A619MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05L	ej	XC6101A649MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05M	-	XC6505C501MR	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
05M	ec	XC6101A620MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05M	ej	XC6101A650MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05N	ec	XC6101A621MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05P	ec	XC6101A622MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05R	ec	XC6101A623MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05S	ec	XC6101A624MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05T	ec	XC6101A625MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05U	ec	XC6101A626MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05V	ec	XC6101A627MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05X	ec	XC6101A628MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05Y	ec	XC6101A629MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
05Z	ec	XC6101A630MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
06	-	R1223N502C	DC-DC-IC	PWM step-down, +CE, 5V±2%, 300kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
06	-	RN5RF56BA	LVR-IC	LRip, +CE, 5.6V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
06	-	RN5RZ56BA	LVR-IC	LDO, LN, 5.6V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
060	-	XC6505C611MR	LVR-IC	LDO, 6.1V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
060	ej	XC6101B231MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
061	-	XC6505C621MR	LVR-IC	LDO, 6.2V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
061	ej	XC6101B232MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
062	-	XC6505C631MR	LVR-IC	LDO, 6.3V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
062	ej	XC6101B233MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
063	-	XC6505C641MR	LVR-IC	LDO, 6.4V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
063	ej	XC6101B234MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
064	-	XC6505C651MR	LVR-IC	LDO, 6.5V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
064	ej	XC6101B235MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
065	-	XC6505C661MR	LVR-IC	LDO, 6.6V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
065	ej	XC6101B236MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
066	-	XC6505C671MR	LVR-IC	LDO, 6.7V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
066	ej	XC6101B237MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
067	-	XC6505C681MR	LVR-IC	LDO, 6.8V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
067	ej	XC6101B238MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
068	-	XC6505C691MR	LVR-IC	LDO, 6.9V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
068	ej	XC6101B239MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
069	-	XC6505C701MR	LVR-IC	LDO, 7.0V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
069	ej	XC6101B240MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06A	ej	XC6101B241MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06B	ej	XC6101B242MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06C	ej	XC6101B243MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06D	ej	XC6101B244MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06E	ej	XC6101B245MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06F	ec	XC6101B216MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06F	ej	XC6101B246MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06H	ec	XC6101B217MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06H	ej	XC6101B247MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06K	ec	XC6101B218MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06K	ej	XC6101B248MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06L	ec	XC6101B219MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06L	ej	XC6101B249MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06M	ec	XC6101B220MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06M	ej	XC6101B250MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06N	-	XC6505C511MR	LVR-IC	LDO, 5.1V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
06N	ec	XC6101B221MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06P	-	XC6505C521MR	LVR-IC	LDO, 5.2V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
06P	ec	XC6101B222MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06R	-	XC6505C531MR	LVR-IC	LDO, 5.3V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
06R	ec	XC6101B223MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06S	-	XC6505C541MR	LVR-IC	LDO, 5.4V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
06S	ec	XC6101B224MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06T	-	XC6505C551MR	LVR-IC	LDO, 5.5V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
06T	ec	XC6101B225MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06U	-	XC6505C561MR	LVR-IC	LDO, 5.6V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
06U	ec	XC6101B226MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06V	-	XC6505C571MR	LVR-IC	LDO, 5.7V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
06V	ec	XC6101B227MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06X	-	XC6505C581MR	LVR-IC	LDO, 5.8V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
06X	ec	XC6101B228MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06Y	-	XC6505C591MR	LVR-IC	LDO, 5.9V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
06Y	ec	XC6101B229MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
06Z	-	XC6505C601MR	LVR-IC	LDO, 6.0V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
06Z	ec	XC6101B230MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07	-	R1223N252D	DC-DC-IC	PWM step-down, +CE, 2.5V±2%, 500kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
07	-	RN5RF57BA	LVR-IC	LRip, +CE, 5.7V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
07	-	RN5RZ57BA	LVR-IC	LDO, LN, 5.7V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
070	ej	XC6101B331MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
071	ej	XC6101B332MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
072	ej	XC6101B333MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
073	ej	XC6101B334MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
074	ej	XC6101B335MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
075	ej	XC6101B336MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
076	ej	XC6101B337MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
077	ej	XC6101B338MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
078	ej	XC6101B339MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
079	ej	XC6101B340MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07A	-	XC6505C711MR	LVR-IC	LDO, 7.1V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
07A	ej	XC6101B341MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07B	-	XC6505C721MR	LVR-IC	LDO, 7.2V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
07B	ej	XC6101B342MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07C	-	XC6505C731MR	LVR-IC	LDO, 7.3V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
07C	ej	XC6101B343MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07D	-	XC6505C741MR	LVR-IC	LDO, 7.4V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
07D	ej	XC6101B344MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07E	-	XC6505C751MR	LVR-IC	LDO, 7.5V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
07E	ej	XC6101B345MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07F	-	XC6505C761MR	LVR-IC	LDO, 7.6V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
07F	ec	XC6101B316MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07F	ej	XC6101B346MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07H	-	XC6505C771MR	LVR-IC	LDO, 7.7V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
07H	ec	XC6101B317MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07H	ej	XC6101B347MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07K	-	XC6505C781MR	LVR-IC	LDO, 7.8V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
07K	ec	XC6101B318MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07K	ej	XC6101B348MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07L	-	XC6505C791MR	LVR-IC	LDO, 7.9V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
07L	ec	XC6101B319MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07L	ej	XC6101B349MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07M	-	XC6505C801MR	LVR-IC	LDO, 8.0V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
07M	ec	XC6101B320MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07M	ej	XC6101B350MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07N	ec	XC6101B321MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07P	ec	XC6101B322MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07R	ec	XC6101B323MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07S	ec	XC6101B324MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07T	ec	XC6101B325MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07U	ec	XC6101B326MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07V	ec	XC6101B327MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07X	ec	XC6101B328MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07Y	ec	XC6101B329MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
07Z	ec	XC6101B330MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08	-	R1223N152D	DC-DC-IC	PWM step-down, +CE, 1.5V±2%, 500kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
08	-	RN5RF58BA	LVR-IC	LRip, +CE, 5.8V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
08	-	RN5RZ58BA	LVR-IC	LDO, LN, 5.8V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
080	ej	XC6101B431MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0808A	-	EC8908-08AB2	LVR-IC	LDO, 0.8V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0808A	-	EC8908-08AC5	LVR-IC	LDO, 0.8V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0808B	-	EC8908-08BB2	LVR-IC	LDO, 0.8V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0808B	-	EC8908-08BC5	LVR-IC	LDO, 0.8V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0808C	-	EC8908-08CB2	LVR-IC	LDO, 0.8V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0808C	-	EC8908-08CC5	LVR-IC	LDO, 0.8V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0808D	-	EC8908-08DB2	LVR-IC	LDO, 0.8V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0808D	-	EC8908-08DC5	LVR-IC	LDO, 0.8V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0809A	-	EC8908-09AB2	LVR-IC	LDO, 0.9V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0809A	-	EC8908-09AC5	LVR-IC	LDO, 0.9V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0809B	-	EC8908-09BB2	LVR-IC	LDO, 0.9V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0809B	-	EC8908-09BC5	LVR-IC	LDO, 0.9V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0809C	-	EC8908-09CB2	LVR-IC	LDO, 0.9V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0809C	-	EC8908-09CC5	LVR-IC	LDO, 0.9V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0809D	-	EC8908-09DB2	LVR-IC	LDO, 0.9V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0809D	-	EC8908-09DC5	LVR-IC	LDO, 0.9V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
081	ej	XC6101B432MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0810A	-	EC8908-10AB2	LVR-IC	LDO, 1.0V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0810A	-	EC8908-10AC5	LVR-IC	LDO, 1.0V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0810B	-	EC8908-10BB2	LVR-IC	LDO, 1.0V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0810B	-	EC8908-10BC5	LVR-IC	LDO, 1.0V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0810C	-	EC8908-10CB2	LVR-IC	LDO, 1.0V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0810C	-	EC8908-10CC5	LVR-IC	LDO, 1.0V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0810D	-	EC8908-10DB2	LVR-IC	LDO, 1.0V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0810D	-	EC8908-10DC5	LVR-IC	LDO, 1.0V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0811A	-	EC8908-11AB2	LVR-IC	LDO, 1.1V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0811A	-	EC8908-11AC5	LVR-IC	LDO, 1.1V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0811B	-	EC8908-11BB2	LVR-IC	LDO, 1.1V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0811B	-	EC8908-11BC5	LVR-IC	LDO, 1.1V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0811C	-	EC8908-11CB2	LVR-IC	LDO, 1.1V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0811C	-	EC8908-11CC5	LVR-IC	LDO, 1.1V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0811D	-	EC8908-11DB2	LVR-IC	LDO, 1.1V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0811D	-	EC8908-11DC5	LVR-IC	LDO, 1.1V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0812A	-	EC8908-12AB2	LVR-IC	LDO, 1.2V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0812A	-	EC8908-12AC5	LVR-IC	LDO, 1.2V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0812B	-	EC8908-12BB2	LVR-IC	LDO, 1.2V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0812B	-	EC8908-12BC5	LVR-IC	LDO, 1.2V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0812C	-	EC8908-12CB2	LVR-IC	LDO, 1.2V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0812C	-	EC8908-12CC5	LVR-IC	LDO, 1.2V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0812D	-	EC8908-12DB2	LVR-IC	LDO, 1.2V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0812D	-	EC8908-12DC5	LVR-IC	LDO, 1.2V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0813A	-	EC8908-13AB2	LVR-IC	LDO, 1.3V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0813A	-	EC8908-13AC5	LVR-IC	LDO, 1.3V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0813B	-	EC8908-13BB2	LVR-IC	LDO, 1.3V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0813B	-	EC8908-13BC5	LVR-IC	LDO, 1.3V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0813C	-	EC8908-13CB2	LVR-IC	LDO, 1.3V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0813C	-	EC8908-13CC5	LVR-IC	LDO, 1.3V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0813D	-	EC8908-13DB2	LVR-IC	LDO, 1.3V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0813D	-	EC8908-13DC5	LVR-IC	LDO, 1.3V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0814A	-	EC8908-14AB2	LVR-IC	LDO, 1.4V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0814A	-	EC8908-14AC5	LVR-IC	LDO, 1.4V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0814B	-	EC8908-14BB2	LVR-IC	LDO, 1.4V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0814B	-	EC8908-14BC5	LVR-IC	LDO, 1.4V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0814C	-	EC8908-14CB2	LVR-IC	LDO, 1.4V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0814C	-	EC8908-14CC5	LVR-IC	LDO, 1.4V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0814D	-	EC8908-14DB2	LVR-IC	LDO, 1.4V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0814D	-	EC8908-14DC5	LVR-IC	LDO, 1.4V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0815A	-	EC8908-15AB2	LVR-IC	LDO, 1.5V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0815A	-	EC8908-15AC5	LVR-IC	LDO, 1.5V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0815B	-	EC8908-15BB2	LVR-IC	LDO, 1.5V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0815B	-	EC8908-15BC5	LVR-IC	LDO, 1.5V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0815C	-	EC8908-15CB2	LVR-IC	LDO, 1.5V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0815C	-	EC8908-15CC5	LVR-IC	LDO, 1.5V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0815D	-	EC8908-15DB2	LVR-IC	LDO, 1.5V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0815D	-	EC8908-15DC5	LVR-IC	LDO, 1.5V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0816A	-	EC8908-16AB2	LVR-IC	LDO, 1.6V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0816A	-	EC8908-16AC5	LVR-IC	LDO, 1.6V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0816B	-	EC8908-16BB2	LVR-IC	LDO, 1.6V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0816B	-	EC8908-16BC5	LVR-IC	LDO, 1.6V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0816C	-	EC8908-16CB2	LVR-IC	LDO, 1.6V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0816C	-	EC8908-16CC5	LVR-IC	LDO, 1.6V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0816D	-	EC8908-16DB2	LVR-IC	LDO, 1.6V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0816D	-	EC8908-16DC5	LVR-IC	LDO, 1.6V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0817A	-	EC8908-17AB2	LVR-IC	LDO, 1.7V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0817A	-	EC8908-17AC5	LVR-IC	LDO, 1.7V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0817B	-	EC8908-17BB2	LVR-IC	LDO, 1.7V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0817B	-	EC8908-17BC5	LVR-IC	LDO, 1.7V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0817C	-	EC8908-17CB2	LVR-IC	LDO, 1.7V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0817C	-	EC8908-17CC5	LVR-IC	LDO, 1.7V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0817D	-	EC8908-17DB2	LVR-IC	LDO, 1.7V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0817D	-	EC8908-17DC5	LVR-IC	LDO, 1.7V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0818A	-	EC8908-18AB2	LVR-IC	LDO, 1.8V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0818A	-	EC8908-18AC5	LVR-IC	LDO, 1.8V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0818B	-	EC8908-18BB2	LVR-IC	LDO, 1.8V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0818B	-	EC8908-18BC5	LVR-IC	LDO, 1.8V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0818C	-	EC8908-18CB2	LVR-IC	LDO, 1.8V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0818C	-	EC8908-18CC5	LVR-IC	LDO, 1.8V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0818D	-	EC8908-18DB2	LVR-IC	LDO, 1.8V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0818D	-	EC8908-18DC5	LVR-IC	LDO, 1.8V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0819A	-	EC8908-19AB2	LVR-IC	LDO, 1.9V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0819A	-	EC8908-19AC5	LVR-IC	LDO, 1.9V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0819B	-	EC8908-19BB2	LVR-IC	LDO, 1.9V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0819B	-	EC8908-19BC5	LVR-IC	LDO, 1.9V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0819C	-	EC8908-19CB2	LVR-IC	LDO, 1.9V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0819C	-	EC8908-19CC5	LVR-IC	LDO, 1.9V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0819D	-	EC8908-19DB2	LVR-IC	LDO, 1.9V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0819D	-	EC8908-19DC5	LVR-IC	LDO, 1.9V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
082	ej	XC6101B433MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0820A	-	EC8908-20AB2	LVR-IC	LDO, 2.0V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0820A	-	EC8908-20AC5	LVR-IC	LDO, 2.0V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0820B	-	EC8908-20BB2	LVR-IC	LDO, 2.0V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0820B	-	EC8908-20BC5	LVR-IC	LDO, 2.0V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0820C	-	EC8908-20CB2	LVR-IC	LDO, 2.0V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0820C	-	EC8908-20CC5	LVR-IC	LDO, 2.0V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0820D	-	EC8908-20DB2	LVR-IC	LDO, 2.0V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0820D	-	EC8908-20DC5	LVR-IC	LDO, 2.0V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0821A	-	EC8908-21AB2	LVR-IC	LDO, 2.1V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0821A	-	EC8908-21AC5	LVR-IC	LDO, 2.1V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0821B	-	EC8908-21BB2	LVR-IC	LDO, 2.1V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0821B	-	EC8908-21BC5	LVR-IC	LDO, 2.1V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0821C	-	EC8908-21CB2	LVR-IC	LDO, 2.1V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0821C	-	EC8908-21CC5	LVR-IC	LDO, 2.1V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0821D	-	EC8908-21DB2	LVR-IC	LDO, 2.1V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0821D	-	EC8908-21DC5	LVR-IC	LDO, 2.1V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0822A	-	EC8908-22AB2	LVR-IC	LDO, 2.2V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0822A	-	EC8908-22AC5	LVR-IC	LDO, 2.2V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0822B	-	EC8908-22BB2	LVR-IC	LDO, 2.2V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0822B	-	EC8908-22BC5	LVR-IC	LDO, 2.2V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0822C	-	EC8908-22CB2	LVR-IC	LDO, 2.2V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0822C	-	EC8908-22CC5	LVR-IC	LDO, 2.2V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0822D	-	EC8908-22DB2	LVR-IC	LDO, 2.2V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0822D	-	EC8908-22DC5	LVR-IC	LDO, 2.2V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0823A	-	EC8908-23AB2	LVR-IC	LDO, 2.3V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0823A	-	EC8908-23AC5	LVR-IC	LDO, 2.3V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0823B	-	EC8908-23BB2	LVR-IC	LDO, 2.3V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0823B	-	EC8908-23BC5	LVR-IC	LDO, 2.3V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0823C	-	EC8908-23CB2	LVR-IC	LDO, 2.3V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0823C	-	EC8908-23CC5	LVR-IC	LDO, 2.3V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0823D	-	EC8908-23DB2	LVR-IC	LDO, 2.3V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0823D	-	EC8908-23DC5	LVR-IC	LDO, 2.3V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0824A	-	EC8908-24AB2	LVR-IC	LDO, 2.4V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0824A	-	EC8908-24AC5	LVR-IC	LDO, 2.4V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0824B	-	EC8908-24BB2	LVR-IC	LDO, 2.4V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0824B	-	EC8908-24BC5	LVR-IC	LDO, 2.4V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0824C	-	EC8908-24CB2	LVR-IC	LDO, 2.4V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0824C	-	EC8908-24CC5	LVR-IC	LDO, 2.4V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0824D	-	EC8908-24DB2	LVR-IC	LDO, 2.4V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0824D	-	EC8908-24DC5	LVR-IC	LDO, 2.4V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0825A	-	EC8908-25AB2	LVR-IC	LDO, 2.5V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0825A	-	EC8908-25AC5	LVR-IC	LDO, 2.5V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0825B	-	EC8908-25BB2	LVR-IC	LDO, 2.5V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0825B	-	EC8908-25BC5	LVR-IC	LDO, 2.5V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0825C	-	EC8908-25CB2	LVR-IC	LDO, 2.5V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0825C	-	EC8908-25CC5	LVR-IC	LDO, 2.5V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0825D	-	EC8908-25DB2	LVR-IC	LDO, 2.5V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0825D	-	EC8908-25DC5	LVR-IC	LDO, 2.5V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0826A	-	EC8908-26AB2	LVR-IC	LDO, 2.6V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0826A	-	EC8908-26AC5	LVR-IC	LDO, 2.6V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0826B	-	EC8908-26BB2	LVR-IC	LDO, 2.6V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0826B	-	EC8908-26BC5	LVR-IC	LDO, 2.6V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0826C	-	EC8908-26CB2	LVR-IC	LDO, 2.6V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0826C	-	EC8908-26CC5	LVR-IC	LDO, 2.6V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0826D	-	EC8908-26DB2	LVR-IC	LDO, 2.6V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0826D	-	EC8908-26DC5	LVR-IC	LDO, 2.6V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0827A	-	EC8908-27AB2	LVR-IC	LDO, 2.7V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0827A	-	EC8908-27AC5	LVR-IC	LDO, 2.7V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0827B	-	EC8908-27BB2	LVR-IC	LDO, 2.7V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0827B	-	EC8908-27BC5	LVR-IC	LDO, 2.7V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0827C	-	EC8908-27CB2	LVR-IC	LDO, 2.7V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0827C	-	EC8908-27CC5	LVR-IC	LDO, 2.7V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0827D	-	EC8908-27DB2	LVR-IC	LDO, 2.7V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0827D	-	EC8908-27DC5	LVR-IC	LDO, 2.7V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0828A	-	EC8908-28AB2	LVR-IC	LDO, 2.8V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0828A	-	EC8908-28AC5	LVR-IC	LDO, 2.8V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0828B	-	EC8908-28BB2	LVR-IC	LDO, 2.8V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0828B	-	EC8908-28BC5	LVR-IC	LDO, 2.8V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0828C	-	EC8908-28CB2	LVR-IC	LDO, 2.8V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0828C	-	EC8908-28CC5	LVR-IC	LDO, 2.8V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0828D	-	EC8908-28DB2	LVR-IC	LDO, 2.8V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0828D	-	EC8908-28DC5	LVR-IC	LDO, 2.8V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0829A	-	EC8908-29AB2	LVR-IC	LDO, 2.9V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0829A	-	EC8908-29AC5	LVR-IC	LDO, 2.9V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0829B	-	EC8908-29BB2	LVR-IC	LDO, 2.9V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0829B	-	EC8908-29BC5	LVR-IC	LDO, 2.9V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0829C	-	EC8908-29CB2	LVR-IC	LDO, 2.9V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0829C	-	EC8908-29CC5	LVR-IC	LDO, 2.9V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0829D	-	EC8908-29DB2	LVR-IC	LDO, 2.9V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0829D	-	EC8908-29DC5	LVR-IC	LDO, 2.9V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
083	ej	XC6101B434MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0830A	-	EC8908-30AB2	LVR-IC	LDO, 3.0V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0830A	-	EC8908-30AC5	LVR-IC	LDO, 3.0V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0830B	-	EC8908-30BB2	LVR-IC	LDO, 3.0V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0830B	-	EC8908-30BC5	LVR-IC	LDO, 3.0V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0830C	-	EC8908-30CB2	LVR-IC	LDO, 3.0V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0830C	-	EC8908-30CC5	LVR-IC	LDO, 3.0V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0830D	-	EC8908-30DB2	LVR-IC	LDO, 3.0V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0830D	-	EC8908-30DC5	LVR-IC	LDO, 3.0V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0831A	-	EC8908-31AB2	LVR-IC	LDO, 3.1V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0831A	-	EC8908-31AC5	LVR-IC	LDO, 3.1V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0831B	-	EC8908-31BB2	LVR-IC	LDO, 3.1V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0831B	-	EC8908-31BC5	LVR-IC	LDO, 3.1V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0831C	-	EC8908-31CB2	LVR-IC	LDO, 3.1V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0831C	-	EC8908-31CC5	LVR-IC	LDO, 3.1V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0831D	-	EC8908-31DB2	LVR-IC	LDO, 3.1V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0831D	-	EC8908-31DC5	LVR-IC	LDO, 3.1V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0832A	-	EC8908-32AB2	LVR-IC	LDO, 3.2V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0832A	-	EC8908-32AC5	LVR-IC	LDO, 3.2V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0832B	-	EC8908-32BB2	LVR-IC	LDO, 3.2V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0832B	-	EC8908-32BC5	LVR-IC	LDO, 3.2V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0832C	-	EC8908-32CB2	LVR-IC	LDO, 3.2V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0832C	-	EC8908-32CC5	LVR-IC	LDO, 3.2V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0832D	-	EC8908-32DB2	LVR-IC	LDO, 3.2V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0832D	-	EC8908-32DC5	LVR-IC	LDO, 3.2V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0833A	-	EC8908-33AB2	LVR-IC	LDO, 3.3V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0833A	-	EC8908-33AC5	LVR-IC	LDO, 3.3V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0833B	-	EC8908-33BB2	LVR-IC	LDO, 3.3V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0833B	-	EC8908-33BC5	LVR-IC	LDO, 3.3V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0833C	-	EC8908-33CB2	LVR-IC	LDO, 3.3V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0833C	-	EC8908-33CC5	LVR-IC	LDO, 3.3V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0833D	-	EC8908-33DB2	LVR-IC	LDO, 3.3V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0833D	-	EC8908-33DC5	LVR-IC	LDO, 3.3V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0834A	-	EC8908-34AB2	LVR-IC	LDO, 3.4V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0834A	-	EC8908-34AC5	LVR-IC	LDO, 3.4V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0834B	-	EC8908-34BB2	LVR-IC	LDO, 3.4V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0834B	-	EC8908-34BC5	LVR-IC	LDO, 3.4V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0834C	-	EC8908-34CB2	LVR-IC	LDO, 3.4V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0834C	-	EC8908-34CC5	LVR-IC	LDO, 3.4V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0834D	-	EC8908-34DB2	LVR-IC	LDO, 3.4V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0834D	-	EC8908-34DC5	LVR-IC	LDO, 3.4V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0835A	-	EC8908-35AB2	LVR-IC	LDO, 3.5V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0835A	-	EC8908-35AC5	LVR-IC	LDO, 3.5V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0835B	-	EC8908-35BB2	LVR-IC	LDO, 3.5V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0835B	-	EC8908-35BC5	LVR-IC	LDO, 3.5V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0835C	-	EC8908-35CB2	LVR-IC	LDO, 3.5V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0835C	-	EC8908-35CC5	LVR-IC	LDO, 3.5V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0835D	-	EC8908-35DB2	LVR-IC	LDO, 3.5V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0835D	-	EC8908-35DC5	LVR-IC	LDO, 3.5V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0836A	-	EC8908-36AB2	LVR-IC	LDO, 3.6V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0836A	-	EC8908-36AC5	LVR-IC	LDO, 3.6V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0836B	-	EC8908-36BB2	LVR-IC	LDO, 3.6V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0836B	-	EC8908-36BC5	LVR-IC	LDO, 3.6V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0836C	-	EC8908-36CB2	LVR-IC	LDO, 3.6V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0836C	-	EC8908-36CC5	LVR-IC	LDO, 3.6V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0836D	-	EC8908-36DB2	LVR-IC	LDO, 3.6V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0836D	-	EC8908-36DC5	LVR-IC	LDO, 3.6V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0837A	-	EC8908-37AB2	LVR-IC	LDO, 3.7V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0837A	-	EC8908-37AC5	LVR-IC	LDO, 3.7V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0837B	-	EC8908-37BB2	LVR-IC	LDO, 3.7V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0837B	-	EC8908-37BC5	LVR-IC	LDO, 3.7V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0837C	-	EC8908-37CB2	LVR-IC	LDO, 3.7V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0837C	-	EC8908-37CC5	LVR-IC	LDO, 3.7V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0837D	-	EC8908-37DB2	LVR-IC	LDO, 3.7V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0837D	-	EC8908-37DC5	LVR-IC	LDO, 3.7V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0838A	-	EC8908-38AB2	LVR-IC	LDO, 3.8V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0838A	-	EC8908-38AC5	LVR-IC	LDO, 3.8V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0838B	-	EC8908-38BB2	LVR-IC	LDO, 3.8V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0838B	-	EC8908-38BC5	LVR-IC	LDO, 3.8V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0838C	-	EC8908-38CB2	LVR-IC	LDO, 3.8V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0838C	-	EC8908-38CC5	LVR-IC	LDO, 3.8V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0838D	-	EC8908-38DB2	LVR-IC	LDO, 3.8V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0838D	-	EC8908-38DC5	LVR-IC	LDO, 3.8V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0839A	-	EC8908-39AB2	LVR-IC	LDO, 3.9V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0839A	-	EC8908-39AC5	LVR-IC	LDO, 3.9V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0839B	-	EC8908-39BB2	LVR-IC	LDO, 3.9V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0839B	-	EC8908-39BC5	LVR-IC	LDO, 3.9V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0839C	-	EC8908-39CB2	LVR-IC	LDO, 3.9V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0839C	-	EC8908-39CC5	LVR-IC	LDO, 3.9V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0839D	-	EC8908-39DB2	LVR-IC	LDO, 3.9V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0839D	-	EC8908-39DC5	LVR-IC	LDO, 3.9V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
084	ej	XC6101B435MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0840A	-	EC8908-40AB2	LVR-IC	LDO, 4.0V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0840A	-	EC8908-40AC5	LVR-IC	LDO, 4.0V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0840B	-	EC8908-40BB2	LVR-IC	LDO, 4.0V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0840B	-	EC8908-40BC5	LVR-IC	LDO, 4.0V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0840C	-	EC8908-40CB2	LVR-IC	LDO, 4.0V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0840C	-	EC8908-40CC5	LVR-IC	LDO, 4.0V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0840D	-	EC8908-40DB2	LVR-IC	LDO, 4.0V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0840D	-	EC8908-40DC5	LVR-IC	LDO, 4.0V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0841A	-	EC8908-41AB2	LVR-IC	LDO, 4.1V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0841A	-	EC8908-41AC5	LVR-IC	LDO, 4.1V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0841B	-	EC8908-41BB2	LVR-IC	LDO, 4.1V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0841B	-	EC8908-41BC5	LVR-IC	LDO, 4.1V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0841C	-	EC8908-41CB2	LVR-IC	LDO, 4.1V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0841C	-	EC8908-41CC5	LVR-IC	LDO, 4.1V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0841D	-	EC8908-41DB2	LVR-IC	LDO, 4.1V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0841D	-	EC8908-41DC5	LVR-IC	LDO, 4.1V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0842A	-	EC8908-42AB2	LVR-IC	LDO, 4.2V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0842A	-	EC8908-42AC5	LVR-IC	LDO, 4.2V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0842B	-	EC8908-42BB2	LVR-IC	LDO, 4.2V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0842B	-	EC8908-42BC5	LVR-IC	LDO, 4.2V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0842C	-	EC8908-42CB2	LVR-IC	LDO, 4.2V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0842C	-	EC8908-42CC5	LVR-IC	LDO, 4.2V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0842D	-	EC8908-42DB2	LVR-IC	LDO, 4.2V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0842D	-	EC8908-42DC5	LVR-IC	LDO, 4.2V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0843A	-	EC8908-43AB2	LVR-IC	LDO, 4.3V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0843A	-	EC8908-43AC5	LVR-IC	LDO, 4.3V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0843B	-	EC8908-43BB2	LVR-IC	LDO, 4.3V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0843B	-	EC8908-43BC5	LVR-IC	LDO, 4.3V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0843C	-	EC8908-43CB2	LVR-IC	LDO, 4.3V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0843C	-	EC8908-43CC5	LVR-IC	LDO, 4.3V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0843D	-	EC8908-43DB2	LVR-IC	LDO, 4.3V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0843D	-	EC8908-43DC5	LVR-IC	LDO, 4.3V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0844A	-	EC8908-44AB2	LVR-IC	LDO, 4.4V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0844A	-	EC8908-44AC5	LVR-IC	LDO, 4.4V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0844B	-	EC8908-44BB2	LVR-IC	LDO, 4.4V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0844B	-	EC8908-44BC5	LVR-IC	LDO, 4.4V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0844C	-	EC8908-44CB2	LVR-IC	LDO, 4.4V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0844C	-	EC8908-44CC5	LVR-IC	LDO, 4.4V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0844D	-	EC8908-44DB2	LVR-IC	LDO, 4.4V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0844D	-	EC8908-44DC5	LVR-IC	LDO, 4.4V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0845A	-	EC8908-45AB2	LVR-IC	LDO, 4.5V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0845A	-	EC8908-45AC5	LVR-IC	LDO, 4.5V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0845B	-	EC8908-45BB2	LVR-IC	LDO, 4.5V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0845B	-	EC8908-45BC5	LVR-IC	LDO, 4.5V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0845C	-	EC8908-45CB2	LVR-IC	LDO, 4.5V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0845C	-	EC8908-45CC5	LVR-IC	LDO, 4.5V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0845D	-	EC8908-45DB2	LVR-IC	LDO, 4.5V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0845D	-	EC8908-45DC5	LVR-IC	LDO, 4.5V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0846A	-	EC8908-46AB2	LVR-IC	LDO, 4.6V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0846A	-	EC8908-46AC5	LVR-IC	LDO, 4.6V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0846B	-	EC8908-46BB2	LVR-IC	LDO, 4.6V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0846B	-	EC8908-46BC5	LVR-IC	LDO, 4.6V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0846C	-	EC8908-46CB2	LVR-IC	LDO, 4.6V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0846C	-	EC8908-46CC5	LVR-IC	LDO, 4.6V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0846D	-	EC8908-46DB2	LVR-IC	LDO, 4.6V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0846D	-	EC8908-46DC5	LVR-IC	LDO, 4.6V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0847A	-	EC8908-47AB2	LVR-IC	LDO, 4.7V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0847A	-	EC8908-47AC5	LVR-IC	LDO, 4.7V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0847B	-	EC8908-47BB2	LVR-IC	LDO, 4.7V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0847B	-	EC8908-47BC5	LVR-IC	LDO, 4.7V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0847C	-	EC8908-47CB2	LVR-IC	LDO, 4.7V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0847C	-	EC8908-47CC5	LVR-IC	LDO, 4.7V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0847D	-	EC8908-47DB2	LVR-IC	LDO, 4.7V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0847D	-	EC8908-47DC5	LVR-IC	LDO, 4.7V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
0848A	-	EC8908-48AB2	LVR-IC	LDO, 4.8V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0848A	-	EC8908-48AC5	LVR-IC	LDO, 4.8V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0848B	-	EC8908-48BB2	LVR-IC	LDO, 4.8V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
0848B	-	EC8908-48BC5	LVR-IC	LDO, 4.8V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
0848C	-	EC8908-48CB2	LVR-IC	LDO, 4.8V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
0848C	-	EC8908-48CC5	LVR-IC	LDO, 4.8V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
084HA	-	EC8908-4HAB2	LVR-IC	LDO, 4.75V±1.5%, 300mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
084HA	-	EC8908-4HAC5	LVR-IC	LDO, 4.75V±1.5%, 300mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
084HB	-	EC8908-4HBB2	LVR-IC	LDO, 4.75V±1.5%, 500mA, +CE	SOT-23-5	28cx	VR4	6r	Ecm
084HB	-	EC8908-4HBC5	LVR-IC	LDO, 4.75V±1.5%, 500mA, +CE	SC-70-5	28cx	VR4	6r	Ecm
084HC	-	EC8908-4HCB2	LVR-IC	LDO, 4.75V±1.5%, 300mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
084HC	-	EC8908-4HCC5	LVR-IC	LDO, 4.75V±1.5%, 300mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
084HD	-	EC8908-4HDB2	LVR-IC	LDO, 4.75V±1.5%, 500mA, -CE	SOT-23-5	28cx	VR4	6r	Ecm
084HD	-	EC8908-4HDC5	LVR-IC	LDO, 4.75V±1.5%, 500mA, -CE	SC-70-5	28cx	VR4	6r	Ecm
085	ej	XC6101B436MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
086	ej	XC6101B437MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
087	ej	XC6101B438MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
088	ej	XC6101B439MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
089	ej	XC6101B440MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08A	ej	XC6101B441MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08B	ej	XC6101B442MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08C	ej	XC6101B443MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08D	ej	XC6101B444MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08E	ej	XC6101B445MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08F	ec	XC6101B416MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
08F	ej	XC6101B446MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08H	ec	XC6101B417MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08H	ej	XC6101B447MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08K	ec	XC6101B418MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08K	ej	XC6101B448MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08L	ec	XC6101B419MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08L	ej	XC6101B449MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08M	ec	XC6101B420MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08M	ej	XC6101B450MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08N	ec	XC6101B421MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08P	ec	XC6101B422MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08R	ec	XC6101B423MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08S	ec	XC6101B424MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08T	ec	XC6101B425MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08U	ec	XC6101B426MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08V	ec	XC6101B427MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08X	ec	XC6101B428MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08Y	ec	XC6101B429MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
08Z	ec	XC6101B430MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09	-	R1223N182D	DC-DC-IC	PWM step-down, +CE, 1.8V±2%, 500kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
09	-	RN5RF59BA	LVR-IC	LRip, +CE, 5.9V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
09	-	RN5RZ59BA	LVR-IC	LDO, LN, 5.9V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
090	ej	XC6101B531MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
090AC	-	BL8509-090ACRN	Vdet-IC	0.9V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
090AC	-	LC9009CB5TR090AC	Vdet-IC	0.9V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
090AN	-	BL8509-090ANRN	Vdet-IC	0.9V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
090AN	-	LC9009CB5TR090AN	Vdet-IC	0.9V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
090BC	-	BL8509-090BCRN	Vdet-IC	0.9V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
090BC	-	LC9009CB5TR090BC	Vdet-IC	0.9V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
090BN	-	BL8509-090BNRN	Vdet-IC	0.9V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
090BN	-	LC9009CB5TR090BN	Vdet-IC	0.9V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
090CC	-	BL8509-090CCRN	Vdet-IC	0.9V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
090CC	-	LC9009CB5TR090CC	Vdet-IC	0.9V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
090CN	-	BL8509-090CNRN	Vdet-IC	0.9V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
090CN	-	LC9009CB5TR090CN	Vdet-IC	0.9V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
090DC	-	BL8509-090DCRN	Vdet-IC	0.9V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
090DC	-	LC9009CB5TR090DC	Vdet-IC	0.9V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
090DN	-	BL8509-090DNRN	Vdet-IC	0.9V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
090DN	-	LC9009CB5TR090DN	Vdet-IC	0.9V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
090EC	-	BL8509-090ECRN	Vdet-IC	0.9V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
090EC	-	LC9009CB5TR090EC	Vdet-IC	0.9V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
090EN	-	BL8509-090ENRN	Vdet-IC	0.9V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
090EN	-	LC9009CB5TR090EN	Vdet-IC	0.9V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
090FC	-	BL8509-090FCRN	Vdet-IC	0.9V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
090FC	-	LC9009CB5TR090FC	Vdet-IC	0.9V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
090FN	-	BL8509-090FNRN	Vdet-IC	0.9V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
090FN	-	LC9009CB5TR090FN	Vdet-IC	0.9V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
090GC	-	BL8509-090GCRN	Vdet-IC	0.9V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
090GC	-	LC9009CB5TR090GC	Vdet-IC	0.9V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
090GN	-	BL8509-090GNRN	Vdet-IC	0.9V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
090GN	-	LC9009CB5TR090GN	Vdet-IC	0.9V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
091	ej	XC6101B532MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
092	ej	XC6101B533MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
093	ej	XC6101B534MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
094	ej	XC6101B535MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
095	-	AP6209-12GA	LVR-IC	LDO, 1.2V±2%, 250mA, +CE, Halogen-free	SOT-23-5	28cx	VR4	6ka	Anw
095	-	AP6209-12PA	LVR-IC	LDO, 1.2V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6k	Anw
095	ej	XC6101B536MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
096	ej	XC6101B537MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
097	ej	XC6101B538MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
098	-	AP6209-15GA	LVR-IC	LDO, 1.5V±2%, 250mA, +CE, Halogen-free	SOT-23-5	28cx	VR4	6ka	Anw
098	-	AP6209-15PA	LVR-IC	LDO, 1.5V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6k	Anw
098	ej	XC6101B539MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
099	ej	XC6101B540MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09A	-	AP6209-18GA	LVR-IC	LDO, 1.8V±2%, 250mA, +CE, Halogen-free	SOT-23-5	28cx	VR4	6ka	Anw
09A	-	AP6209-18PA	LVR-IC	LDO, 1.8V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6k	Anw
09A	ej	XC6101B541MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09B	-	AP6209-BBGA	LVR-IC	LDO, 1.85V±2%, 250mA, +CE, Halogen-free	SOT-23-5	28cx	VR4	6ka	Anw
09B	-	AP6209-BBPA	LVR-IC	LDO, 1.85V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6k	Anw
09B	ej	XC6101B542MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
09C	ej	XC6101B543MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09D	-	AP6209-20GA	LVR-IC	LDO, 2.0V±2%, 250mA, +CE, Halogen-free	SOT-23-5	28cx	VR4	6ka	Anw
09D	-	AP6209-20PA	LVR-IC	LDO, 2.0V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6k	Anw
09D	ej	XC6101B544MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09E	-	AP6209-22GA	LVR-IC	LDO, 2.2V±2%, 250mA, +CE, Halogen-free	SOT-23-5	28cx	VR4	6ka	Anw
09E	-	AP6209-22PA	LVR-IC	LDO, 2.2V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6k	Anw
09E	ej	XC6101B545MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09F	ec	XC6101B516MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09F	ej	XC6101B546MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09G	-	AP6209-25GA	LVR-IC	LDO, 2.5V±2%, 250mA, +CE, Halogen-free	SOT-23-5	28cx	VR4	6ka	Anw
09G	-	AP6209-25PA	LVR-IC	LDO, 2.5V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6k	Anw
09H	ec	XC6101B517MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09H	ej	XC6101B547MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09J	-	AP6209-27GA	LVR-IC	LDO, 2.7V±2%, 250mA, +CE, Halogen-free	SOT-23-5	28cx	VR4	6ka	Anw
09J	-	AP6209-27PA	LVR-IC	LDO, 2.7V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6k	Anw
09K	-	AP6209-28GA	LVR-IC	LDO, 2.8V±2%, 250mA, +CE, Halogen-free	SOT-23-5	28cx	VR4	6ka	Anw
09K	-	AP6209-28PA	LVR-IC	LDO, 2.8V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6k	Anw
09K	ec	XC6101B518MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09K	ej	XC6101B548MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09L	ec	XC6101B519MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09L	ej	XC6101B549MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09M	-	AP6209-30GA	LVR-IC	LDO, 3.0V±2%, 250mA, +CE, Halogen-free	SOT-23-5	28cx	VR4	6ka	Anw
09M	-	AP6209-30PA	LVR-IC	LDO, 3.0V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6k	Anw
09M	ec	XC6101B520MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09M	ej	XC6101B550MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09N	ec	XC6101B521MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09P	ec	XC6101B522MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09Q	-	AP6209-33GA	LVR-IC	LDO, 3.3V±2%, 250mA, +CE, Halogen-free	SOT-23-5	28cx	VR4	6ka	Anw
09Q	-	AP6209-33PA	LVR-IC	LDO, 3.3V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6k	Anw
09R	ec	XC6101B523MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09S	-	AP6209-42GA	LVR-IC	LDO, 4.2V±2%, 250mA, +CE, Halogen-free	SOT-23-5	28cx	VR4	6ka	Anw
09S	-	AP6209-42PA	LVR-IC	LDO, 4.2V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6k	Anw
09S	ec	XC6101B524MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09T	-	AP6209-35GA	LVR-IC	LDO, 3.5V±2%, 250mA, +CE, Halogen-free	SOT-23-5	28cx	VR4	6ka	Anw
09T	-	AP6209-35PA	LVR-IC	LDO, 3.5V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6k	Anw
09T	ec	XC6101B525MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09U	ec	XC6101B526MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09V	-	AP6209-36GA	LVR-IC	LDO, 3.6V±2%, 250mA, +CE, Halogen-free	SOT-23-5	28cx	VR4	6ka	Anw
09V	-	AP6209-36PA	LVR-IC	LDO, 3.6V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6k	Anw
09V	ec	XC6101B527MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09X	ec	XC6101B528MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09Y	ec	XC6101B529MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
09Z	-	AP6209-50GA	LVR-IC	LDO, 5.0V±2%, 250mA, +CE, Halogen-free	SOT-23-5	28cx	VR4	6ka	Anw
09Z	-	AP6209-50PA	LVR-IC	LDO, 5.0V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6k	Anw
09Z	ec	XC6101B530MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0A	-	BU4317FWE	Vdet-IC	1.7V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0A	-	BU4317G	Vdet-IC	1.7V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0A0	-	LN6210A312M	LVR-IC	LDO, 3.1V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0A0	-	XC6210A312MR	LVR-IC	LDO, 3.1V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A0	-	XC6221C311MR	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A0	ej	XC6101B631MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0A1	-	LN6210A322M	LVR-IC	LDO, 3.2V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0A1	-	XC6210A322MR	LVR-IC	LDO, 3.2V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A1	-	XC6221C321MR	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A1	ej	XC6101B632MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0A2	-	LN6210A332M	LVR-IC	LDO, 3.3V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0A2	-	XC6210A332MR	LVR-IC	LDO, 3.3V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A2	-	XC6221C331MR	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A2	ej	XC6101B633MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0A3	-	LN6210A342M	LVR-IC	LDO, 3.4V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0A3	-	XC6210A342MR	LVR-IC	LDO, 3.4V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A3	-	XC6221C341MR	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A3	ej	XC6101B634MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0A4	-	LN6210A352M	LVR-IC	LDO, 3.5V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0A4	-	XC6210A352MR	LVR-IC	LDO, 3.5V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A4	-	XC6221C351MR	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A4	ej	XC6101B635MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0A5	-	LN6210A362M	LVR-IC	LDO, 3.6V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0A5	-	XC6210A362MR	LVR-IC	LDO, 3.6V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A5	-	XC6221C361MR	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0A5	ej	XC6101B636MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0A6	-	LN6210A372M	LVR-IC	LDO, 3.7V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0A6	-	XC6210A372MR	LVR-IC	LDO, 3.7V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A6	-	XC6221C371MR	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A6	ej	XC6101B637MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0A7	-	LN6210A382M	LVR-IC	LDO, 3.8V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0A7	-	XC6210A382MR	LVR-IC	LDO, 3.8V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A7	-	XC6221C381MR	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A7	ej	XC6101B638MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0A8	-	LN6210A392M	LVR-IC	LDO, 3.9V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0A8	-	XC6210A392MR	LVR-IC	LDO, 3.9V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A8	-	XC6221C391MR	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A8	ej	XC6101B639MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0A9	-	LN6210A402M	LVR-IC	LDO, 4.0V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0A9	-	XC6210A402MR	LVR-IC	LDO, 4.0V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A9	-	XC6221C401MR	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0A9	ej	XC6101B640MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AA	-	LN6210A412M	LVR-IC	LDO, 4.1V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0AA	-	XC6210A412MR	LVR-IC	LDO, 4.1V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AA	-	XC6221C411MR	LVR-IC	LDO, 4.1±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AA	ej	XC6101B641MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AB	-	LN6210A422M	LVR-IC	LDO, 4.2V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0AB	-	XC6210A422MR	LVR-IC	LDO, 4.2V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AB	-	XC6221C421MR	LVR-IC	LDO, 4.2±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AB	ej	XC6101B642MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AC	-	LN6210A432M	LVR-IC	LDO, 4.3V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0AC	-	XC6210A432MR	LVR-IC	LDO, 4.3V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AC	-	XC6221C431MR	LVR-IC	LDO, 4.3±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AC	ej	XC6101B643MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AD	-	LN6210A442M	LVR-IC	LDO, 4.4V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0AD	-	XC6210A442MR	LVR-IC	LDO, 4.4V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AD	-	XC6221C441MR	LVR-IC	LDO, 4.4±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AD	ej	XC6101B644MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AE	-	LN6210A452M	LVR-IC	LDO, 4.5V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0AE	-	XC6210A452MR	LVR-IC	LDO, 4.5V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AE	-	XC6221C451MR	LVR-IC	LDO, 4.5±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AE	ej	XC6101B645MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AF	-	LN6210A462M	LVR-IC	LDO, 4.6V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0AF	-	XC6210A462MR	LVR-IC	LDO, 4.6V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AF	-	XC6221C461MR	LVR-IC	LDO, 4.6±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AF	ec	XC6101B616MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AF	ej	XC6101B646MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AH	-	LN6210A472M	LVR-IC	LDO, 4.7V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0AH	-	XC6210A472MR	LVR-IC	LDO, 4.7V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AH	-	XC6221C471MR	LVR-IC	LDO, 4.7±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AH	ec	XC6101B617MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AH	ej	XC6101B647MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AK	-	LN6210A482M	LVR-IC	LDO, 4.8V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0AK	-	XC6210A482MR	LVR-IC	LDO, 4.8V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AK	-	XC6221C481MR	LVR-IC	LDO, 4.8±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AK	ec	XC6101B618MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AK	ej	XC6101B648MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AL	-	LN6210A492M	LVR-IC	LDO, 4.9V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0AL	-	XC6210A492MR	LVR-IC	LDO, 4.9V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AL	-	XC6221C491MR	LVR-IC	LDO, 4.9±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AL	ec	XC6101B619MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AL	ej	XC6101B649MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AM	-	LN6210A502M	LVR-IC	LDO, 5.0V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0AM	-	XC6210A502MR	LVR-IC	LDO, 5.0V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AM	-	XC6221C501MR	LVR-IC	LDO, 5.0±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0AM	ec	XC6101B620MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AM	ej	XC6101B650MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AN	ec	XC6101B621MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AP	ec	XC6101B622MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AR	ec	XC6101B623MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AS	ec	XC6101B624MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AT	ec	XC6101B625MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AU	ec	XC6101B626MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AV	ec	XC6101B627MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AX	ec	XC6101B628MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0AY	ec	XC6101B629MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0AZ	ec	XC6101B630MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
0B	-	BU4318FWE	Vdet-IC	1.8V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0B	-	BU4318G	Vdet-IC	1.8V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0B	-	R3111N101A	Vdet-IC	1.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
0B	-	RN5RL20AA	LVR-IC	2.0V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
0B	eu	RN5VD10CA	Vdet-IC	1.0V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
0B0	-	LN6210B312M	LVR-IC	LDO, 3.1V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0B0	-	XC6210B312MR	LVR-IC	LDO, 3.1V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0B0	ej	XC6101C231MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0B1	-	LN6210B322M	LVR-IC	LDO, 3.2V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0B1	-	XC6210B322MR	LVR-IC	LDO, 3.2V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0B1	-	XC6221D321MR	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0B1	ej	XC6101C232MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0B2	-	LN6210B332M	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0B2	-	XC6210B332MR	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0B2	-	XC6221D331MR	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0B2	ej	XC6101C233MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0B3	-	LN6210B342M	LVR-IC	LDO, 3.4V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0B3	-	XC6210B342MR	LVR-IC	LDO, 3.4V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0B3	-	XC6221D341MR	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0B3	ej	XC6101C234MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0B4	-	LN6210B352M	LVR-IC	LDO, 3.5V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0B4	-	XC6210B352MR	LVR-IC	LDO, 3.5V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0B4	-	XC6221D351MR	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0B4	ej	XC6101C235MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0B5	-	LN6210B362M	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0B5	-	XC6210B362MR	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0B5	-	XC6221D361MR	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0B5	ej	XC6101C236MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0B6	-	LN6210B372M	LVR-IC	LDO, 3.7V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0B6	-	XC6210B372MR	LVR-IC	LDO, 3.7V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0B6	-	XC6221D371MR	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0B6	ej	XC6101C237MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0B7	-	LN6210B382M	LVR-IC	LDO, 3.8V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0B7	-	XC6210B382MR	LVR-IC	LDO, 3.8V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0B7	-	XC6221D381MR	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0B7	ej	XC6101C238MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0B8	-	LN6210B392M	LVR-IC	LDO, 3.9V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0B8	-	XC6210B392MR	LVR-IC	LDO, 3.9V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0B8	-	XC6221D391MR	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0B8	ej	XC6101C239MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0B9	-	LN6210B402M	LVR-IC	LDO, 4.0V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0B9	-	XC6210B402MR	LVR-IC	LDO, 4.0V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0B9	-	XC6221D401MR	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0B9	ej	XC6101C240MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BA	-	LN6210B412M	LVR-IC	LDO, 4.1V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0BA	-	XC6210B412MR	LVR-IC	LDO, 4.1V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0BA	-	XC6221D411MR	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0BA	ej	XC6101C241MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BB	-	LN6210B422M	LVR-IC	LDO, 4.2V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0BB	-	XC6210B422MR	LVR-IC	LDO, 4.2V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0BB	-	XC6221D421MR	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0BB	ej	XC6101C242MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BC	-	LN6210B432M	LVR-IC	LDO, 4.3V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0BC	-	XC6210B432MR	LVR-IC	LDO, 4.3V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0BC	-	XC6221D431MR	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0BC	ej	XC6101C243MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BD	-	LN6210B442M	LVR-IC	LDO, 4.4V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0BD	-	XC6210B442MR	LVR-IC	LDO, 4.4V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0BD	-	XC6221D441MR	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0BD	ej	XC6101C244MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BE	-	LN6210B452M	LVR-IC	LDO, 4.5V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0BE	-	XC6210B452MR	LVR-IC	LDO, 4.5V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0BE	-	XC6221D451MR	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0BE	ej	XC6101C245MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BF	-	LN6210B462M	LVR-IC	LDO, 4.6V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0BF	-	XC6210B462MR	LVR-IC	LDO, 4.6V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0BF	-	XC6221D461MR	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0BF	ec	XC6101C216MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0BF	ej	XC6101C246MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BH	-	LN6210B472M	LVR-IC	LDO, 4.7V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0BH	-	XC6210B472MR	LVR-IC	LDO, 4.7V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0BH	-	XC6221D471MR	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0BH	ec	XC6101C217MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BH	ej	XC6101C247MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BK	-	LN6210B482M	LVR-IC	LDO, 4.8V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0BK	-	XC6210B482MR	LVR-IC	LDO, 4.8V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0BK	-	XC6221D481MR	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0BK	ec	XC6101C218MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BK	ej	XC6101C248MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BL	-	LN6210B492M	LVR-IC	LDO, 4.9V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0BL	-	XC6210B492MR	LVR-IC	LDO, 4.9V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0BL	-	XC6221D491MR	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0BL	ec	XC6101C219MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BL	ej	XC6101C249MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BM	-	LN6210B502M	LVR-IC	LDO, 5.0V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0BM	-	XC6210B502MR	LVR-IC	LDO, 5.0V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0BM	-	XC6221D501MR	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0BM	ec	XC6101C220MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BM	ej	XC6101C250MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BN	ec	XC6101C221MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BP	ec	XC6101C222MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BR	ec	XC6101C223MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BS	ec	XC6101C224MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BT	ec	XC6101C225MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BU	ec	XC6101C226MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BV	ec	XC6101C227MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BX	ec	XC6101C228MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BY	ec	XC6101C229MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0BZ	ec	XC6101C230MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0C	-	BU4319FWE	Vdet-IC	1.9V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0C	-	BU4319G	Vdet-IC	1.9V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0C	-	MC78LC30NTR	LVR-IC	Low Iq, 3V±2.5%, 80mA	SOT-23-5	28vu	VR1	6b	Ons
0C	-	R3111N201A	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
0C	-	RN5RL30AA	LVR-IC	3.0V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
0C	eu	RN5VD20CA	Vdet-IC	2.0V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
0C0	-	LN6210C312M	LVR-IC	LDO, 3.1V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0C0	-	XC6210C312MR	LVR-IC	LDO, 3.1V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0C0	ej	XC6101C331MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0C1	-	LN6210C322M	LVR-IC	LDO, 3.2V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0C1	-	XC6210C322MR	LVR-IC	LDO, 3.2V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0C1	ej	XC6101C332MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0C2	-	LN6210C332M	LVR-IC	LDO, 3.3V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0C2	-	XC6210C332MR	LVR-IC	LDO, 3.3V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0C2	ej	XC6101C333MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0C3	-	LN6210C342M	LVR-IC	LDO, 3.4V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0C3	-	XC6210C342MR	LVR-IC	LDO, 3.4V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0C3	ej	XC6101C334MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0C4	-	LN6210C352M	LVR-IC	LDO, 3.5V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0C4	-	XC6210C352MR	LVR-IC	LDO, 3.5V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0C4	ej	XC6101C335MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0C5	-	LN6210C362M	LVR-IC	LDO, 3.6V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0C5	-	XC6210C362MR	LVR-IC	LDO, 3.6V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0C5	ej	XC6101C336MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0C6	-	LN6210C372M	LVR-IC	LDO, 3.7V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0C6	-	XC6210C372MR	LVR-IC	LDO, 3.7V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0C6	ej	XC6101C337MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0C7	-	LN6210C382M	LVR-IC	LDO, 3.8V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0C7	-	XC6210C382MR	LVR-IC	LDO, 3.8V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0C7	ej	XC6101C338MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0C8	-	LN6210C392M	LVR-IC	LDO, 3.9V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0C8	-	XC6210C392MR	LVR-IC	LDO, 3.9V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0C8	ej	XC6101C339MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0C9	-	LN6210C402M	LVR-IC	LDO, 4.0V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0C9	-	XC6210C402MR	LVR-IC	LDO, 4.0V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0C9	ej	XC6101C340MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CA	-	LN6210C412M	LVR-IC	LDO, 4.1V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0CA	-	XC6210C412MR	LVR-IC	LDO, 4.1V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0CA	ej	XC6101C341MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0CB	-	LN6210C422M	LVR-IC	LDO, 4.2V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0CB	-	XC6210C422MR	LVR-IC	LDO, 4.2V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0CB	ej	XC6101C342MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CC	-	LN6210C432M	LVR-IC	LDO, 4.3V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0CC	-	XC6210C432MR	LVR-IC	LDO, 4.3V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0CC	ej	XC6101C343MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CD	-	LN6210C442M	LVR-IC	LDO, 4.4V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0CD	-	XC6210C442MR	LVR-IC	LDO, 4.4V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0CD	ej	XC6101C344MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CE	-	LN6210C452M	LVR-IC	LDO, 4.5V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0CE	-	XC6210C452MR	LVR-IC	LDO, 4.5V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0CE	ej	XC6101C345MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CF	-	LN6210C462M	LVR-IC	LDO, 4.6V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0CF	-	XC6210C462MR	LVR-IC	LDO, 4.6V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0CF	ec	XC6101C316MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CF	ej	XC6101C346MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CH	-	LN6210C472M	LVR-IC	LDO, 4.7V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0CH	-	XC6210C472MR	LVR-IC	LDO, 4.7V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0CH	ec	XC6101C317MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CH	ej	XC6101C347MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CK	-	LN6210C482M	LVR-IC	LDO, 4.8V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0CK	-	XC6210C482MR	LVR-IC	LDO, 4.8V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0CK	ec	XC6101C318MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CK	ej	XC6101C348MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CL	-	LN6210C492M	LVR-IC	LDO, 4.9V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0CL	-	XC6210C492MR	LVR-IC	LDO, 4.9V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0CL	ec	XC6101C319MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CL	ej	XC6101C349MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CM	-	LN6210C502M	LVR-IC	LDO, 5.0V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0CM	-	XC6210C502MR	LVR-IC	LDO, 5.0V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0CM	ec	XC6101C320MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CM	ej	XC6101C350MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CN	ec	XC6101C321MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CP	ec	XC6101C322MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CR	ec	XC6101C323MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CS	ec	XC6101C324MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CT	ec	XC6101C325MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CU	ec	XC6101C326MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CV	ec	XC6101C327MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CX	ec	XC6101C328MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CY	ec	XC6101C329MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0CZ	ec	XC6101C330MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0D	-	BU4320FWE	Vdet-IC	2.0V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0D	-	BU4320G	Vdet-IC	2.0V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0D	-	R3111N301A	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
0D	-	RN5RL40AA	LVR-IC	4.0V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
0D	eu	RN5VD30CA	Vdet-IC	3V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
0D0	-	LN6210D312M	LVR-IC	LDO, 3.1V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0D0	-	XC6210D312MR	LVR-IC	LDO, 3.1V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0D0	ej	XC6101C431MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0D1	-	LN6210D322M	LVR-IC	LDO, 3.2V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0D1	-	XC6210D322MR	LVR-IC	LDO, 3.2V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0D1	ej	XC6101C432MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0D2	-	LN6210D332M	LVR-IC	LDO, 3.3V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0D2	-	XC6210D332MR	LVR-IC	LDO, 3.3V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0D2	ej	XC6101C433MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0D3	-	LN6210D342M	LVR-IC	LDO, 3.4V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0D3	-	XC6210D342MR	LVR-IC	LDO, 3.4V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0D3	ej	XC6101C434MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0D4	-	LN6210D352M	LVR-IC	LDO, 3.5V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0D4	-	XC6210D352MR	LVR-IC	LDO, 3.5V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0D4	ej	XC6101C435MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0D5	-	LN6210D362M	LVR-IC	LDO, 3.6V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0D5	-	XC6210D362MR	LVR-IC	LDO, 3.6V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0D5	ej	XC6101C436MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0D6	-	LN6210D372M	LVR-IC	LDO, 3.7V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0D6	-	XC6210D372MR	LVR-IC	LDO, 3.7V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0D6	ej	XC6101C437MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0D7	-	LN6210D382M	LVR-IC	LDO, 3.8V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0D7	-	XC6210D382MR	LVR-IC	LDO, 3.8V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0D7	ej	XC6101C438MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0D8	-	LN6210D392M	LVR-IC	LDO, 3.9V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0D8	-	XC6210D392MR	LVR-IC	LDO, 3.9V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0D8	ej	XC6101C439MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0D9	-	LN6210D402M	LVR-IC	LDO, 4.0V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0D9	-	XC6210D402MR	LVR-IC	LDO, 4.0V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0D9	ej	XC6101C440MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DA	-	LN6210D412M	LVR-IC	LDO, 4.1V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0DA	-	XC6210D412MR	LVR-IC	LDO, 4.1V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0DA	ej	XC6101C441MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DB	-	LN6210D422M	LVR-IC	LDO, 4.2V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0DB	-	XC6210D422MR	LVR-IC	LDO, 4.2V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0DB	ej	XC6101C442MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DC	-	LN6210D432M	LVR-IC	LDO, 4.3V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0DC	-	XC6210D432MR	LVR-IC	LDO, 4.3V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0DC	ej	XC6101C443MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DD	-	LN6210D442M	LVR-IC	LDO, 4.4V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0DD	-	XC6210D442MR	LVR-IC	LDO, 4.4V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0DD	ej	XC6101C444MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DE	-	LN6210D452M	LVR-IC	LDO, 4.5V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0DE	-	XC6210D452MR	LVR-IC	LDO, 4.5V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0DE	ej	XC6101C445MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DF	-	LN6210D462M	LVR-IC	LDO, 4.6V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0DF	-	XC6210D462MR	LVR-IC	LDO, 4.6V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0DF	ec	XC6101C416MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DF	ej	XC6101C446MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DH	-	LN6210D472M	LVR-IC	LDO, 4.7V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0DH	-	XC6210D472MR	LVR-IC	LDO, 4.7V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0DH	ec	XC6101C417MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DH	ej	XC6101C447MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DK	-	LN6210D482M	LVR-IC	LDO, 4.8V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0DK	-	XC6210D482MR	LVR-IC	LDO, 4.8V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0DK	ec	XC6101C418MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DK	ej	XC6101C448MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DL	-	LN6210D492M	LVR-IC	LDO, 4.9V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0DL	-	XC6210D492MR	LVR-IC	LDO, 4.9V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0DL	ec	XC6101C419MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DL	ej	XC6101C449MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DM	-	LN6210D502M	LVR-IC	LDO, 5.0V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0DM	-	XC6210D502MR	LVR-IC	LDO, 5.0V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0DM	ec	XC6101C420MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DM	ej	XC6101C450MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DN	ec	XC6101C421MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DP	ec	XC6101C422MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DR	ec	XC6101C423MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DS	ec	XC6101C424MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DT	ec	XC6101C425MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DU	ec	XC6101C426MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DV	ec	XC6101C427MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DX	ec	XC6101C428MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DY	ec	XC6101C429MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0DZ	ec	XC6101C430MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0E	-	BU4321FWE	Vdet-IC	2.1V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0E	-	BU4321G	Vdet-IC	2.1V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0E	-	R3111N401A	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
0E	-	RN5RL50AA	LVR-IC	5.0V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
0E	eu	RN5VD40CA	Vdet-IC	4V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
0E0	ej	XC6101C531MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0E1	ej	XC6101C532MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0E2	ej	XC6101C533MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0E3	ej	XC6101C534MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0E4	ej	XC6101C535MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0E5	ej	XC6101C536MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0E6	ej	XC6101C537MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0E7	-	XC6221C08BMR	LVR-IC	LDO, 0.85V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0E7	ej	XC6101C538MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0E8	-	XC6210A08AMR	LVR-IC	LDO, 0.85V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0E8	-	XC6221C09BMR	LVR-IC	LDO, 0.95V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0E8	ej	XC6101C539MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0E9	-	XC6210A09AMR	LVR-IC	LDO, 0.95V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0E9	-	XC6221C10BMR	LVR-IC	LDO, 1.05V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0E9	ej	XC6101C540MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EA	-	XC6210A11AMR	LVR-IC	LDO, 1.15V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EA	-	XC6221C11BMR	LVR-IC	LDO, 1.15V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EA	ej	XC6101C541MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EB	-	XC6210A12AMR	LVR-IC	LDO, 1.25V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EB	-	XC6221C12BMR	LVR-IC	LDO, 1.25V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EB	ej	XC6101C542MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EC	-	XC6210A13AMR	LVR-IC	LDO, 1.35V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EC	-	XC6221C13BMR	LVR-IC	LDO, 1.35V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EC	ej	XC6101C543MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0ED	-	XC6210A14AMR	LVR-IC	LDO, 1.45V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0ED	-	XC6221C14BMR	LVR-IC	LDO, 1.45V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0ED	ej	XC6101C544MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EE	-	LN6210A15AM	LVR-IC	LDO, 1.55V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0EE	-	XC6210A15AMR	LVR-IC	LDO, 1.55V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EE	-	XC6221C15BMR	LVR-IC	LDO, 1.55V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EE	ej	XC6101C545MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EF	-	LN6210A16AM	LVR-IC	LDO, 1.65V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0EF	-	XC6210A16AMR	LVR-IC	LDO, 1.65V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EF	-	XC6221C16BMR	LVR-IC	LDO, 1.65V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EF	ec	XC6101C516MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EF	ej	XC6101C546MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EH	-	LN6210A17AM	LVR-IC	LDO, 1.75V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0EH	-	XC6210A17AMR	LVR-IC	LDO, 1.75V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EH	-	XC6221C17BMR	LVR-IC	LDO, 1.75V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EH	ec	XC6101C517MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EH	ej	XC6101C547MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EK	-	LN6210A18AM	LVR-IC	LDO, 1.85V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0EK	-	XC6210A18AMR	LVR-IC	LDO, 1.85V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EK	-	XC6221C18BMR	LVR-IC	LDO, 1.85V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EK	ec	XC6101C518MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EK	ej	XC6101C548MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EL	-	LN6210A19AM	LVR-IC	LDO, 1.95V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0EL	-	XC6210A19AMR	LVR-IC	LDO, 1.95V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EL	-	XC6221C19BMR	LVR-IC	LDO, 1.95V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EL	ec	XC6101C519MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EL	ej	XC6101C549MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EM	-	LN6210A20AM	LVR-IC	LDO, 2.05V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0EM	-	XC6210A20AMR	LVR-IC	LDO, 2.05V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EM	-	XC6221C20BMR	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EM	ec	XC6101C520MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EM	ej	XC6101C550MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EN	-	LN6210A21AM	LVR-IC	LDO, 2.15V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0EN	-	XC6210A21AMR	LVR-IC	LDO, 2.15V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EN	-	XC6221C21BMR	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EN	ec	XC6101C521MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EP	-	LN6210A22AM	LVR-IC	LDO, 2.25V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0EP	-	XC6210A22AMR	LVR-IC	LDO, 2.25V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EP	-	XC6221C22BMR	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EP	ec	XC6101C522MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0ER	-	LN6210A23AM	LVR-IC	LDO, 2.35V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0ER	-	XC6210A23AMR	LVR-IC	LDO, 2.35V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0ER	-	XC6221C23BMR	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0ER	ec	XC6101C523MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0ES	-	LN6210A24AM	LVR-IC	LDO, 2.45V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0ES	-	XC6210A24AMR	LVR-IC	LDO, 2.45V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0ES	-	XC6221C24BMR	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0ES	ec	XC6101C524MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0ET	-	LN6210A25AM	LVR-IC	LDO, 2.55V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0ET	-	XC6210A25AMR	LVR-IC	LDO, 2.55V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0ET	-	XC6221C25BMR	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0ET	ec	XC6101C525MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EU	-	LN6210A26AM	LVR-IC	LDO, 2.65V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0EU	-	XC6210A26AMR	LVR-IC	LDO, 2.65V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EU	-	XC6221C26BMR	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EU	ec	XC6101C526MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EV	-	LN6210A27AM	LVR-IC	LDO, 2.75V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0EV	-	XC6210A27AMR	LVR-IC	LDO, 2.75V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EV	-	XC6221C27BMR	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0EV	ec	XC6101C527MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EX	-	LN6210A28AM	LVR-IC	LDO, 2.85V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0EX	-	XC6210A28AMR	LVR-IC	LDO, 2.85V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EX	-	XC6221C28BMR	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EX	ec	XC6101C528MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EY	-	LN6210A29AM	LVR-IC	LDO, 2.95V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0EY	-	XC6210A29AMR	LVR-IC	LDO, 2.95V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EY	-	XC6221C29BMR	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EY	ec	XC6101C529MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0EZ	-	LN6210A30AM	LVR-IC	LDO, 3.05V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0EZ	-	XC6210A30AMR	LVR-IC	LDO, 3.05V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EZ	-	XC6221C30BMR	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0EZ	ec	XC6101C530MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0F	-	BU4322FWE	Vdet-IC	2.2V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0F	-	BU4322G	Vdet-IC	2.2V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0F	-	R3111N501A	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
0F	-	RN5RL60AA	LVR-IC	6.0V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
0F	eu	RN5VD50CA	Vdet-IC	5V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
0F0	ej	XC6101C631MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0F1	ej	XC6101C632MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0F2	ej	XC6101C633MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0F3	ej	XC6101C634MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0F4	ej	XC6101C635MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0F5	ej	XC6101C636MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0F6	-	U74HCT1G66-AF5	CMOS-Log	Single-pole single-throw analog switch	SOT-25	28	Log16	6a	Utc
0F6	ej	XC6101C637MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0F6G	-	U74HCT1G66G-AF5	CMOS-Log	Single-pole single-throw analog switch	SOT-25	28	Log16	6a	Utc
0F6L	-	U74HCT1G66L-AF5	CMOS-Log	Single-pole single-throw analog switch	SOT-25	28	Log16	6a	Utc
0F7	-	XC6221D08BMR	LVR-IC	LDO, 0.85V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0F7	ej	XC6101C638MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0F8	-	XC6210B08AMR	LVR-IC	LDO, 0.85V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0F8	-	XC6221D09BMR	LVR-IC	LDO, 0.95V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0F8	ej	XC6101C639MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0F9	-	XC6210B09AMR	LVR-IC	LDO, 0.95V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0F9	-	XC6221D10BMR	LVR-IC	LDO, 1.05V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0F9	ej	XC6101C640MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FA	-	XC6210B11AMR	LVR-IC	LDO, 1.15V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FA	-	XC6221D11BMR	LVR-IC	LDO, 1.15V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FA	ej	XC6101C641MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FB	-	XC6210B12AMR	LVR-IC	LDO, 1.25V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FB	-	XC6221D12BMR	LVR-IC	LDO, 1.25V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FB	ej	XC6101C642MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FC	-	XC6210B13AMR	LVR-IC	LDO, 1.35V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FC	-	XC6221D13BMR	LVR-IC	LDO, 1.35V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FC	ej	XC6101C643MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FD	-	XC6210B14AMR	LVR-IC	LDO, 1.45V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FD	-	XC6221D14BMR	LVR-IC	LDO, 1.45V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FD	ej	XC6101C644MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FE	-	LN6210B15AM	LVR-IC	LDO, 1.55V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0FE	-	XC6210B15AMR	LVR-IC	LDO, 1.55V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FE	-	XC6221D15BMR	LVR-IC	LDO, 1.55V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FE	ej	XC6101C645MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FF	-	LN6210B16AM	LVR-IC	LDO, 1.65V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0FF	-	XC6210B16AMR	LVR-IC	LDO, 1.65V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FF	-	XC6221D16BMR	LVR-IC	LDO, 1.65V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FF	ec	XC6101C616MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FF	ej	XC6101C646MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FH	-	LN6210B17AM	LVR-IC	LDO, 1.75V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0FH	-	XC6210B17AMR	LVR-IC	LDO, 1.75V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FH	-	XC6221D17BMR	LVR-IC	LDO, 1.75V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FH	ec	XC6101C617MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FH	ej	XC6101C647MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FK	-	LN6210B18AM	LVR-IC	LDO, 1.85V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0FK	-	XC6210B18AMR	LVR-IC	LDO, 1.85V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FK	-	XC6221D18BMR	LVR-IC	LDO, 1.85V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FK	ec	XC6101C618MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FK	ej	XC6101C648MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FL	-	LN6210B19AM	LVR-IC	LDO, 1.95V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0FL	-	XC6210B19AMR	LVR-IC	LDO, 1.95V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FL	-	XC6221D19BMR	LVR-IC	LDO, 1.95V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0FL	ec	XC6101C619MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FL	ej	XC6101C649MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FM	-	LN6210B20AM	LVR-IC	LDO, 2.05V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0FM	-	XC6210B20AMR	LVR-IC	LDO, 2.05V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FM	-	XC6221D20BMR	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FM	ec	XC6101C620MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FM	ej	XC6101C650MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FN	-	LN6210B21AM	LVR-IC	LDO, 2.15V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0FN	-	XC6210B21AMR	LVR-IC	LDO, 2.15V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FN	-	XC6221D21BMR	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FN	ec	XC6101C621MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FP	-	LN6210B22AM	LVR-IC	LDO, 2.25V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0FP	-	XC6210B22AMR	LVR-IC	LDO, 2.25V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FP	-	XC6221D22BMR	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FP	ec	XC6101C622MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FR	-	LN6210B23AM	LVR-IC	LDO, 2.35V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0FR	-	XC6210B23AMR	LVR-IC	LDO, 2.35V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FR	-	XC6221D23BMR	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FR	ec	XC6101C623MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FS	-	LN6210B24AM	LVR-IC	LDO, 2.45V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0FS	-	XC6210B24AMR	LVR-IC	LDO, 2.45V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FS	-	XC6221D24BMR	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FS	ec	XC6101C624MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FT	-	LN6210B25AM	LVR-IC	LDO, 2.55V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0FT	-	XC6210B25AMR	LVR-IC	LDO, 2.55V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FT	-	XC6221D25BMR	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FT	ec	XC6101C625MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FU	-	LN6210B26AM	LVR-IC	LDO, 2.65V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0FU	-	XC6210B26AMR	LVR-IC	LDO, 2.65V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FU	-	XC6221D26BMR	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FU	ec	XC6101C626MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FV	-	LN6210B27AM	LVR-IC	LDO, 2.75V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0FV	-	XC6210B27AMR	LVR-IC	LDO, 2.75V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FV	-	XC6221D27BMR	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FV	ec	XC6101C627MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FX	-	LN6210B28AM	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0FX	-	XC6210B28AMR	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FX	-	XC6221D28BMR	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FX	ec	XC6101C628MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FY	-	LN6210B29AM	LVR-IC	LDO, 2.95V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0FY	-	XC6210B29AMR	LVR-IC	LDO, 2.95V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FY	-	XC6221D29BMR	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FY	ec	XC6101C629MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0FZ	-	LN6210B30AM	LVR-IC	LDO, 3.05V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0FZ	-	XC6210B30AMR	LVR-IC	LDO, 3.05V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0FZ	-	XC6221D30BMR	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0FZ	ec	XC6101C630MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
0G	-	BU4323FWE	Vdet-IC	2.3V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0G	-	BU4323G	Vdet-IC	2.3V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0G	-	R3111N601A	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
0G	eu	RN5VD60CA	Vdet-IC	6V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
0G=	-	RT9193-39GB	LVR-IC	LDO, 3.9V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
0H	-	BU4324FWE	Vdet-IC	2.4V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0H	-	BU4324G	Vdet-IC	2.4V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0H=	-	RT9198-4GGBR	LVR-IC	LDO, 4.75V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
0H0	ej	XC6101D331MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0H1	ej	XC6101D332MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0H2	ej	XC6101D333MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0H3	ej	XC6101D334MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0H4	ej	XC6101D335MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0H5	ej	XC6101D336MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0H6	ej	XC6101D337MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0H7	ej	XC6101D338MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0H8	-	XC6210C08AMR	LVR-IC	LDO, 0.85V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0H8	ej	XC6101D339MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0H9	-	XC6210C09AMR	LVR-IC	LDO, 0.95V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0H9	ej	XC6101D340MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HA	-	XC6210C11AMR	LVR-IC	LDO, 1.15V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HA	ej	XC6101D341MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HB	-	XC6210C12AMR	LVR-IC	LDO, 1.25V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0HB	ej	XC6101D342MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HC	-	XC6210C13AMR	LVR-IC	LDO, 1.35V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HC	ej	XC6101D343MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HD	-	XC6210C14AMR	LVR-IC	LDO, 1.45V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HD	ej	XC6101D344MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HE	-	LN6210C15AM	LVR-IC	LDO, 1.55V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0HE	-	XC6210C15AMR	LVR-IC	LDO, 1.55V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HE	ej	XC6101D345MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HF	-	LN6210C16AM	LVR-IC	LDO, 1.65V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0HF	-	XC6210C16AMR	LVR-IC	LDO, 1.65V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HF	ec	XC6101D316MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HF	ej	XC6101D346MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HH	-	LN6210C17AM	LVR-IC	LDO, 1.75V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0HH	-	XC6210C17AMR	LVR-IC	LDO, 1.75V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HH	ec	XC6101D317MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HH	ej	XC6101D347MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HK	-	LN6210C18AM	LVR-IC	LDO, 1.85V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0HK	-	XC6210C18AMR	LVR-IC	LDO, 1.85V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HK	ec	XC6101D318MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HK	ej	XC6101D348MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HL	-	LN6210C19AM	LVR-IC	LDO, 1.95V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0HL	-	XC6210C19AMR	LVR-IC	LDO, 1.95V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HL	ec	XC6101D319MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HL	ej	XC6101D349MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HM	-	LN6210C20AM	LVR-IC	LDO, 2.05V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0HM	-	XC6210C20AMR	LVR-IC	LDO, 2.05V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HM	ec	XC6101D320MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HM	ej	XC6101D350MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HN	-	LN6210C21AM	LVR-IC	LDO, 2.15V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0HN	-	XC6210C21AMR	LVR-IC	LDO, 2.15V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HN	ec	XC6101D321MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HP	-	LN6210C22AM	LVR-IC	LDO, 2.25V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0HP	-	XC6210C22AMR	LVR-IC	LDO, 2.25V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HP	ec	XC6101D322MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HR	-	LN6210C23AM	LVR-IC	LDO, 2.35V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0HR	-	XC6210C23AMR	LVR-IC	LDO, 2.35V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HR	ec	XC6101D323MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HS	-	LN6210C24AM	LVR-IC	LDO, 2.45V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0HS	-	XC6210C24AMR	LVR-IC	LDO, 2.45V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HS	ec	XC6101D324MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HT	-	LN6210C25AM	LVR-IC	LDO, 2.55V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0HT	-	XC6210C25AMR	LVR-IC	LDO, 2.55V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HT	ec	XC6101D325MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HU	-	LN6210C26AM	LVR-IC	LDO, 2.65V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0HU	-	XC6210C26AMR	LVR-IC	LDO, 2.65V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HU	ec	XC6101D326MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HV	-	LN6210C27AM	LVR-IC	LDO, 2.75V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0HV	-	XC6210C27AMR	LVR-IC	LDO, 2.75V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HV	ec	XC6101D327MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HX	-	LN6210C28AM	LVR-IC	LDO, 2.85V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0HX	-	XC6210C28AMR	LVR-IC	LDO, 2.85V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HX	ec	XC6101D328MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HY	-	LN6210C29AM	LVR-IC	LDO, 2.95V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0HY	-	XC6210C29AMR	LVR-IC	LDO, 2.95V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HY	ec	XC6101D329MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0HZ	-	LN6210C30AM	LVR-IC	LDO, 3.05V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0HZ	-	XC6210C30AMR	LVR-IC	LDO, 3.05V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0HZ	ec	XC6101D330MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0J	-	BU4325FWE	Vdet-IC	2.5V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0J	-	BU4325G	Vdet-IC	2.5V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0J	-	R3111N101C	Vdet-IC	1.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
0K	-	BU4326FWE	Vdet-IC	2.6V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0K	-	BU4326G	Vdet-IC	2.6V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0K	-	R3111N201C	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
0K0	ej	XC6101D431MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0K1	ej	XC6101D432MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0K2	ej	XC6101D433MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0K3	ej	XC6101D434MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0K4	ej	XC6101D435MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0K5	ej	XC6101D436MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0K6	ej	XC6101D437MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0K7	ej	XC6101D438MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0K8	-	XC6210D08AMR	LVR-IC	LDO, 0.85V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0K8	ej	XC6101D439MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0K9	-	XC6210D09AMR	LVR-IC	LDO, 0.95V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0K9	ej	XC6101D440MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KA	-	XC6210D11AMR	LVR-IC	LDO, 1.15V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KA	ej	XC6101D441MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KB	-	XC6210D12AMR	LVR-IC	LDO, 1.25V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KB	ej	XC6101D442MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KC	-	XC6210D13AMR	LVR-IC	LDO, 1.35V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KC	ej	XC6101D443MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KD	-	XC6210D14AMR	LVR-IC	LDO, 1.45V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KD	ej	XC6101D444MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KE	-	LN6210D15AM	LVR-IC	LDO, 1.55V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0KE	-	XC6210D15AMR	LVR-IC	LDO, 1.55V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KE	ej	XC6101D445MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KF	-	LN6210D16AM	LVR-IC	LDO, 1.65V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0KF	-	XC6210D16AMR	LVR-IC	LDO, 1.65V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KF	ec	XC6101D416MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KF	ej	XC6101D446MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KH	-	LN6210D17AM	LVR-IC	LDO, 1.75V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0KH	-	XC6210D17AMR	LVR-IC	LDO, 1.75V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KH	ec	XC6101D417MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KH	ej	XC6101D447MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KK	-	LN6210D18AM	LVR-IC	LDO, 1.85V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0KK	-	XC6210D18AMR	LVR-IC	LDO, 1.85V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KK	ec	XC6101D418MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KK	ej	XC6101D448MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KL	-	LN6210D19AM	LVR-IC	LDO, 1.95V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0KL	-	XC6210D19AMR	LVR-IC	LDO, 1.95V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KL	ec	XC6101D419MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KL	ej	XC6101D449MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KM	-	LN6210D20AM	LVR-IC	LDO, 2.05V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0KM	-	XC6210D20AMR	LVR-IC	LDO, 2.05V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KM	ec	XC6101D420MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KM	ej	XC6101D450MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KN	-	LN6210D21AM	LVR-IC	LDO, 2.15V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0KN	-	XC6210D21AMR	LVR-IC	LDO, 2.15V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KN	ec	XC6101D421MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KP	-	LN6210D22AM	LVR-IC	LDO, 2.25V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0KP	-	XC6210D22AMR	LVR-IC	LDO, 2.25V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KP	ec	XC6101D422MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KR	-	LN6210D23AM	LVR-IC	LDO, 2.35V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0KR	-	XC6210D23AMR	LVR-IC	LDO, 2.35V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KR	ec	XC6101D423MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KS	-	LN6210D24AM	LVR-IC	LDO, 2.45V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0KS	-	XC6210D24AMR	LVR-IC	LDO, 2.45V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KS	ec	XC6101D424MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KT	-	LN6210D25AM	LVR-IC	LDO, 2.55V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0KT	-	XC6210D25AMR	LVR-IC	LDO, 2.55V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KT	ec	XC6101D425MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KU	-	LN6210D26AM	LVR-IC	LDO, 2.65V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0KU	-	XC6210D26AMR	LVR-IC	LDO, 2.65V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KU	ec	XC6101D426MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KV	-	LN6210D27AM	LVR-IC	LDO, 2.75V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0KV	-	XC6210D27AMR	LVR-IC	LDO, 2.75V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KV	ec	XC6101D427MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KX	-	LN6210D28AM	LVR-IC	LDO, 2.85V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0KX	-	XC6210D28AMR	LVR-IC	LDO, 2.85V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KX	ec	XC6101D428MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KY	-	LN6210D29AM	LVR-IC	LDO, 2.95V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0KY	-	XC6210D29AMR	LVR-IC	LDO, 2.95V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KY	ec	XC6101D429MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0KZ	-	LN6210D30AM	LVR-IC	LDO, 3.05V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0KZ	-	XC6210D30AMR	LVR-IC	LDO, 3.05V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0KZ	ec	XC6101D430MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0L	-	BU4327FWE	Vdet-IC	2.7V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0L	-	BU4327G	Vdet-IC	2.7V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0L	-	R3111N301C	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0L=	-	RT9818A-40GB	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Rct
0L0	-	LN6210A31AM	LVR-IC	LDO, 3.15V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0L0	-	XC6210A31AMR	LVR-IC	LDO, 3.15V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L0	-	XC6221C31BMR	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L0	ej	XC6101D531MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0L1	-	LN6210A32AM	LVR-IC	LDO, 3.25V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0L1	-	XC6210A32AMR	LVR-IC	LDO, 3.25V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L1	-	XC6221C32BMR	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L1	ej	XC6101D532MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0L2	-	LN6210A33AM	LVR-IC	LDO, 3.35V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0L2	-	XC6210A33AMR	LVR-IC	LDO, 3.35V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L2	-	XC6221C33BMR	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L2	ej	XC6101D533MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0L3	-	LN6210A34AM	LVR-IC	LDO, 3.45V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0L3	-	XC6210A34AMR	LVR-IC	LDO, 3.45V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L3	-	XC6221C34BMR	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L3	ej	XC6101D534MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0L4	-	LN6210A35AM	LVR-IC	LDO, 3.55V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0L4	-	XC6210A35AMR	LVR-IC	LDO, 3.55V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L4	-	XC6221C35BMR	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L4	ej	XC6101D535MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0L5	-	LN6210A36AM	LVR-IC	LDO, 3.65V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0L5	-	XC6210A36AMR	LVR-IC	LDO, 3.65V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L5	-	XC6221C36BMR	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L5	ej	XC6101D536MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0L6	-	LN6210A37AM	LVR-IC	LDO, 3.75V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0L6	-	XC6210A37AMR	LVR-IC	LDO, 3.75V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L6	-	XC6221C37BMR	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L6	ej	XC6101D537MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0L7	-	LN6210A38AM	LVR-IC	LDO, 3.85V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0L7	-	XC6210A38AMR	LVR-IC	LDO, 3.85V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L7	-	XC6221C38BMR	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L7	ej	XC6101D538MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0L8	-	LN6210A39AM	LVR-IC	LDO, 3.95V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0L8	-	XC6210A39AMR	LVR-IC	LDO, 3.95V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L8	-	XC6221C39BMR	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L8	ej	XC6101D539MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0L9	-	LN6210A40AM	LVR-IC	LDO, 4.05V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0L9	-	XC6210A40AMR	LVR-IC	LDO, 4.05V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L9	-	XC6221C40BMR	LVR-IC	LDO, 4.05±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0L9	ej	XC6101D540MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LA	-	LN6210A41AM	LVR-IC	LDO, 4.15V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0LA	-	XC6210A41AMR	LVR-IC	LDO, 4.15V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LA	-	XC6221C41BMR	LVR-IC	LDO, 4.15±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LA	ej	XC6101D541MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LB	-	LN6210A42AM	LVR-IC	LDO, 4.25V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0LB	-	XC6210A42AMR	LVR-IC	LDO, 4.25V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LB	-	XC6221C42BMR	LVR-IC	LDO, 4.25±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LB	ej	XC6101D542MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LC	-	LN6210A43AM	LVR-IC	LDO, 4.35V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0LC	-	XC6210A43AMR	LVR-IC	LDO, 4.35V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LC	-	XC6221C43BMR	LVR-IC	LDO, 4.35±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LC	ej	XC6101D543MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LD	-	LN6210A44AM	LVR-IC	LDO, 4.45V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0LD	-	XC6210A44AMR	LVR-IC	LDO, 4.45V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LD	-	XC6221C44BMR	LVR-IC	LDO, 4.45±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LD	ej	XC6101D544MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LE	-	LN6210A45AM	LVR-IC	LDO, 4.55V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0LE	-	XC6210A45AMR	LVR-IC	LDO, 4.55V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LE	-	XC6221C45BMR	LVR-IC	LDO, 4.55±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LE	ej	XC6101D545MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LF	-	LN6210A46AM	LVR-IC	LDO, 4.65V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0LF	-	XC6210A46AMR	LVR-IC	LDO, 4.65V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LF	-	XC6221C46BMR	LVR-IC	LDO, 4.65±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LF	ec	XC6101D516MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LF	ej	XC6101D546MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LH	-	LN6210A47AM	LVR-IC	LDO, 4.75V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0LH	-	XC6210A47AMR	LVR-IC	LDO, 4.75V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LH	-	XC6221C47BMR	LVR-IC	LDO, 4.75±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LH	ec	XC6101D517MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0LH	ej	XC6101D547MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LK	-	LN6210A48AM	LVR-IC	LDO, 4.85V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0LK	-	XC6210A48AMR	LVR-IC	LDO, 4.85V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LK	-	XC6221C48BMR	LVR-IC	LDO, 4.85±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LK	ec	XC6101D518MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LK	ej	XC6101D548MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LL	-	LN6210A49AM	LVR-IC	LDO, 4.95V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0LL	-	XC6210A49AMR	LVR-IC	LDO, 4.95V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LL	-	XC6221C49BMR	LVR-IC	LDO, 4.95±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0LL	ec	XC6101D519MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LL	ej	XC6101D549MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LM	ec	XC6101D520MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LM	ej	XC6101D550MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LN	ec	XC6101D521MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LP	ec	XC6101D522MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LR	ec	XC6101D523MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LS	ec	XC6101D524MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LT	ec	XC6101D525MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LU	ec	XC6101D526MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LV	ec	XC6101D527MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LX	ec	XC6101D528MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LY	ec	XC6101D529MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0LZ	ec	XC6101D530MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0M	-	BU4328FWE	Vdet-IC	2.8V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0M	-	BU4328G	Vdet-IC	2.8V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0M	-	R3111N401C	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
0M0	-	LN6210B31AM	LVR-IC	LDO, 3.15V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0M0	-	XC6210B31AMR	LVR-IC	LDO, 3.15V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0M0	-	XC6221D31BMR	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0M0	ej	XC6101D631MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0M1	-	LN6210B32AM	LVR-IC	LDO, 3.25V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0M1	-	XC6210B32AMR	LVR-IC	LDO, 3.25V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0M1	-	XC6221D32BMR	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0M1	ej	XC6101D632MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0M2	-	LN6210B33AM	LVR-IC	LDO, 3.35V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0M2	-	XC6210B33AMR	LVR-IC	LDO, 3.35V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0M2	-	XC6221D33BMR	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0M2	ej	XC6101D633MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0M3	-	LN6210B34AM	LVR-IC	LDO, 3.45V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0M3	-	XC6210B34AMR	LVR-IC	LDO, 3.45V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0M3	-	XC6221D34BMR	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0M3	ej	XC6101D634MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0M4	-	LN6210B35AM	LVR-IC	LDO, 3.55V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0M4	-	XC6210B35AMR	LVR-IC	LDO, 3.55V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0M4	-	XC6221D35BMR	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0M4	ej	XC6101D635MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0M5	-	LN6210B36AM	LVR-IC	LDO, 3.65V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0M5	-	XC6210B36AMR	LVR-IC	LDO, 3.65V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0M5	-	XC6221D36BMR	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0M5	ej	XC6101D636MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0M6	-	LN6210B37AM	LVR-IC	LDO, 3.75V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0M6	-	XC6210B37AMR	LVR-IC	LDO, 3.75V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0M6	-	XC6221D37BMR	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0M6	ej	XC6101D637MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0M7	-	LN6210B38AM	LVR-IC	LDO, 3.85V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0M7	-	XC6210B38AMR	LVR-IC	LDO, 3.85V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0M7	-	XC6221D38BMR	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0M7	ej	XC6101D638MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0M8	-	LN6210B39AM	LVR-IC	LDO, 3.95V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0M8	-	XC6210B39AMR	LVR-IC	LDO, 3.95V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0M8	-	XC6221D39BMR	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0M8	ej	XC6101D639MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0M9	-	LN6210B40AM	LVR-IC	LDO, 4.05V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0M9	-	XC6210B40AMR	LVR-IC	LDO, 4.05V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0M9	-	XC6221D40BMR	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0M9	ej	XC6101D640MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MA	-	LN6210B41AM	LVR-IC	LDO, 4.15V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0MA	-	XC6210B41AMR	LVR-IC	LDO, 4.15V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0MA	-	XC6221D41BMR	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0MA	ej	XC6101D641MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0MB	-	LN6210B42AM	LVR-IC	LDO, 4.25V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0MB	-	XC6210B42AMR	LVR-IC	LDO, 4.25V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0MB	-	XC6221D42BMR	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0MB	ej	XC6101D642MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MC	-	LN6210B43AM	LVR-IC	LDO, 4.35V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0MC	-	XC6210B43AMR	LVR-IC	LDO, 4.35V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0MC	-	XC6221D43BMR	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0MC	ej	XC6101D643MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MD	-	LN6210B44AM	LVR-IC	LDO, 4.45V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0MD	-	XC6210B44AMR	LVR-IC	LDO, 4.45V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0MD	-	XC6221D44BMR	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0MD	ej	XC6101D644MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0ME	-	LN6210B45AM	LVR-IC	LDO, 4.55V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0ME	-	XC6210B45AMR	LVR-IC	LDO, 4.55V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0ME	-	XC6221D45BMR	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0ME	ej	XC6101D645MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MF	-	LN6210B46AM	LVR-IC	LDO, 4.65V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0MF	-	XC6210B46AMR	LVR-IC	LDO, 4.65V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0MF	-	XC6221D46BMR	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0MF	ec	XC6101D616MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MF	ej	XC6101D646MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MH	-	LN6210B47AM	LVR-IC	LDO, 4.75V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0MH	-	XC6210B47AMR	LVR-IC	LDO, 4.75V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0MH	-	XC6221D47BMR	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0MH	ec	XC6101D617MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MH	ej	XC6101D647MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MK	-	LN6210B48AM	LVR-IC	LDO, 4.85V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0MK	-	XC6210B48AMR	LVR-IC	LDO, 4.85V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0MK	-	XC6221D48BMR	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0MK	ec	XC6101D618MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MK	ej	XC6101D648MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0ML	-	LN6210B49AM	LVR-IC	LDO, 4.95V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0ML	-	XC6210B49AMR	LVR-IC	LDO, 4.95V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0ML	-	XC6221D49BMR	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0ML	ec	XC6101D619MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0ML	ej	XC6101D649MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MM	ec	XC6101D620MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MM	ej	XC6101D650MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MN	ec	XC6101D621MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MP	ec	XC6101D622MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MR	ec	XC6101D623MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MS	ec	XC6101D624MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MT	ec	XC6101D625MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MU	ec	XC6101D626MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MV	ec	XC6101D627MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MX	ec	XC6101D628MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MY	ec	XC6101D629MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0MZ	ec	XC6101D630MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
0N	-	BU4329FWE	Vdet-IC	2.9V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0N	-	BU4329G	Vdet-IC	2.9V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0N	-	R3111N501C	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
0N0	-	LN6210C31AM	LVR-IC	LDO, 3.15V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0N0	-	XC6210C31AMR	LVR-IC	LDO, 3.15V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0N1	-	LN6210C32AM	LVR-IC	LDO, 3.25V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0N1	-	XC6210C32AMR	LVR-IC	LDO, 3.25V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0N2	-	LN6210C33AM	LVR-IC	LDO, 3.35V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0N2	-	XC6210C33AMR	LVR-IC	LDO, 3.35V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0N3	-	LN6210C34AM	LVR-IC	LDO, 3.45V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0N3	-	XC6210C34AMR	LVR-IC	LDO, 3.45V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0N4	-	LN6210C35AM	LVR-IC	LDO, 3.55V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0N4	-	XC6210C35AMR	LVR-IC	LDO, 3.55V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0N5	-	LN6210C36AM	LVR-IC	LDO, 3.65V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0N5	-	XC6210C36AMR	LVR-IC	LDO, 3.65V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0N6	-	LN6210C37AM	LVR-IC	LDO, 3.75V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0N6	-	XC6210C37AMR	LVR-IC	LDO, 3.75V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0N7	-	LN6210C38AM	LVR-IC	LDO, 3.85V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0N7	-	XC6210C38AMR	LVR-IC	LDO, 3.85V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0N8	-	LN6210C39AM	LVR-IC	LDO, 3.95V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0N8	-	XC6210C39AMR	LVR-IC	LDO, 3.95V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0N9	-	LN6210C40AM	LVR-IC	LDO, 4.05V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0N9	-	XC6210C40AMR	LVR-IC	LDO, 4.05V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0NA	-	LN6210C41AM	LVR-IC	LDO, 4.15V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0NA	-	XC6210C41AMR	LVR-IC	LDO, 4.15V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0NB	-	LN6210C42AM	LVR-IC	LDO, 4.25V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0NB	-	XC6210C42AMR	LVR-IC	LDO, 4.25V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0NC	-	LN6210C43AM	LVR-IC	LDO, 4.35V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0NC	-	XC6210C43AMR	LVR-IC	LDO, 4.35V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0ND	-	LN6210C44AM	LVR-IC	LDO, 4.45V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0ND	-	XC6210C44AMR	LVR-IC	LDO, 4.45V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0NE	-	LN6210C45AM	LVR-IC	LDO, 4.55V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0NE	-	XC6210C45AMR	LVR-IC	LDO, 4.55V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0NF	-	LN6210C46AM	LVR-IC	LDO, 4.65V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0NF	-	XC6210C46AMR	LVR-IC	LDO, 4.65V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0NH	-	LN6210C47AM	LVR-IC	LDO, 4.75V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0NH	-	XC6210C47AMR	LVR-IC	LDO, 4.75V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0NK	-	LN6210C48AM	LVR-IC	LDO, 4.85V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0NK	-	XC6210C48AMR	LVR-IC	LDO, 4.85V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0NL	-	LN6210C49AM	LVR-IC	LDO, 4.95V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0NL	-	XC6210C49AMR	LVR-IC	LDO, 4.95V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0P	-	BU4330FWE	Vdet-IC	3.0V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0P	-	BU4330G	Vdet-IC	3.0V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0P	-	R3111N601C	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
0P0	-	LN6210D31AM	LVR-IC	LDO, 3.15V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0P0	-	XC6210D31AMR	LVR-IC	LDO, 3.15V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0P0	ej	XC6101E431MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0P1	-	LN6210D32AM	LVR-IC	LDO, 3.25V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0P1	-	XC6210D32AMR	LVR-IC	LDO, 3.25V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0P1	ej	XC6101E432MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0P2	-	LN6210D33AM	LVR-IC	LDO, 3.35V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0P2	-	XC6210D33AMR	LVR-IC	LDO, 3.35V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0P2	ej	XC6101E433MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0P3	-	LN6210D34AM	LVR-IC	LDO, 3.45V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0P3	-	XC6210D34AMR	LVR-IC	LDO, 3.45V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0P3	ej	XC6101E434MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0P4	-	LN6210D35AM	LVR-IC	LDO, 3.55V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0P4	-	XC6210D35AMR	LVR-IC	LDO, 3.55V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0P4	ej	XC6101E435MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0P5	-	LN6210D36AM	LVR-IC	LDO, 3.65V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0P5	-	XC6210D36AMR	LVR-IC	LDO, 3.65V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0P5	ej	XC6101E436MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0P6	-	LN6210D37AM	LVR-IC	LDO, 3.75V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0P6	-	XC6210D37AMR	LVR-IC	LDO, 3.75V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0P6	ej	XC6101E437MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0P7	-	LN6210D38AM	LVR-IC	LDO, 3.85V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0P7	-	XC6210D38AMR	LVR-IC	LDO, 3.85V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0P7	ej	XC6101E438MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0P8	-	LN6210D39AM	LVR-IC	LDO, 3.95V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0P8	-	XC6210D39AMR	LVR-IC	LDO, 3.95V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0P8	ej	XC6101E439MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0P9	-	LN6210D40AM	LVR-IC	LDO, 4.05V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0P9	-	XC6210D40AMR	LVR-IC	LDO, 4.05V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0P9	ej	XC6101E440MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PA	-	LN6210D41AM	LVR-IC	LDO, 4.15V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0PA	-	XC6210D41AMR	LVR-IC	LDO, 4.15V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0PA	ej	XC6101E441MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PB	-	LN6210D42AM	LVR-IC	LDO, 4.25V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0PB	-	XC6210D42AMR	LVR-IC	LDO, 4.25V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0PB	ej	XC6101E442MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PC	-	LN6210D43AM	LVR-IC	LDO, 4.35V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0PC	-	XC6210D43AMR	LVR-IC	LDO, 4.35V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0PC	ej	XC6101E443MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PD	-	LN6210D44AM	LVR-IC	LDO, 4.45V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0PD	-	XC6210D44AMR	LVR-IC	LDO, 4.45V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0PD	ej	XC6101E444MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PE	-	LN6210D45AM	LVR-IC	LDO, 4.55V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0PE	-	XC6210D45AMR	LVR-IC	LDO, 4.55V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0PE	ej	XC6101E445MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PF	-	LN6210D46AM	LVR-IC	LDO, 4.65V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0PF	-	XC6210D46AMR	LVR-IC	LDO, 4.65V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0PF	ec	XC6101E416MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0PF	ej	XC6101E446MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PH	-	LN6210D47AM	LVR-IC	LDO, 4.75V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0PH	-	XC6210D47AMR	LVR-IC	LDO, 4.75V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0PH	ec	XC6101E417MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PH	ej	XC6101E447MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PK	-	LN6210D48AM	LVR-IC	LDO, 4.85V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0PK	-	XC6210D48AMR	LVR-IC	LDO, 4.85V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0PK	ec	XC6101E418MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PK	ej	XC6101E448MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PL	-	LN6210D49AM	LVR-IC	LDO, 4.95V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0PL	-	XC6210D49AMR	LVR-IC	LDO, 4.95V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0PL	ec	XC6101E419MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PL	ej	XC6101E449MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PM	ec	XC6101E420MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PM	ej	XC6101E450MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PN	ec	XC6101E421MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PP	ec	XC6101E422MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PR	ec	XC6101E423MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PS	ec	XC6101E424MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PT	ec	XC6101E425MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PU	ec	XC6101E426MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PV	ec	XC6101E427MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PX	ec	XC6101E428MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PY	ec	XC6101E429MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0PZ	ec	XC6101E430MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0Q	-	BU4331FWE	Vdet-IC	3.1V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0Q	-	BU4331G	Vdet-IC	3.1V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0R	-	BU4332FWE	Vdet-IC	3.2V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0R	-	BU4332G	Vdet-IC	3.2V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0R	-	R1210N301A	DC-DC-IC	PWM step-up, 3V, 35..100kHz	SOT-23-5	28sc	DC3	6g	Ric
0R=	-	RT9818C-29GB	Vdet-IC	2.9V±1.5%, -Reset ODO, Td=220ms	SOT-23-5	28vdm	VD6	6a	Rct
0R0	ej	XC6101E531MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0R1	ej	XC6101E532MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0R2	ej	XC6101E533MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0R3	ej	XC6101E534MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0R4	ej	XC6101E535MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0R5	ej	XC6101E536MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0R6	ej	XC6101E537MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0R7	ej	XC6101E538MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0R8	ej	XC6101E539MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0R9	ej	XC6101E540MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RA	ej	XC6101E541MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RB	ej	XC6101E542MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RC	ej	XC6101E543MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RD	ej	XC6101E544MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RE	ej	XC6101E545MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RF	ec	XC6101E516MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RF	ej	XC6101E546MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RH	ec	XC6101E517MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RH	ej	XC6101E547MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RK	ec	XC6101E518MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RK	ej	XC6101E548MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RL	ec	XC6101E519MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RL	ej	XC6101E549MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RM	ec	XC6101E520MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RM	ej	XC6101E550MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RN	ec	XC6101E521MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RP	ec	XC6101E522MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RR	ec	XC6101E523MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RS	ec	XC6101E524MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RT	ec	XC6101E525MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RU	ec	XC6101E526MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RV	ec	XC6101E527MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RX	ec	XC6101E528MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RY	ec	XC6101E529MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0RZ	ec	XC6101E530MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0S	-	BU4333FWE	Vdet-IC	3.3V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0S	-	BU4333G	Vdet-IC	3.3V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0S0	ej	XC6101E631MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0S1	ej	XC6101E632MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0S2	ej	XC6101E633MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0S3	ej	XC6101E634MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0S4	ej	XC6101E635MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0S5	ej	XC6101E636MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0S6	ej	XC6101E637MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0S7	ej	XC6101E638MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0S8	ej	XC6101E639MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0S9	ej	XC6101E640MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SA	ej	XC6101E641MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SB	ej	XC6101E642MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SC	ej	XC6101E643MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SD	ej	XC6101E644MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SE	ej	XC6101E645MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SF	ec	XC6101E616MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SF	ej	XC6101E646MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SH	ec	XC6101E617MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SH	ej	XC6101E647MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SK	ec	XC6101E618MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SK	ej	XC6101E648MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SL	ec	XC6101E619MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SL	ej	XC6101E649MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SM	ec	XC6101E620MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SM	ej	XC6101E650MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SN	ec	XC6101E621MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SP	ec	XC6101E622MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SR	ec	XC6101E623MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SS	ec	XC6101E624MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0ST	ec	XC6101E625MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SU	ec	XC6101E626MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SV	ec	XC6101E627MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SX	ec	XC6101E628MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SY	ec	XC6101E629MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0SZ	ec	XC6101E630MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
0T	-	BU4334FWE	Vdet-IC	3.4V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0T	-	BU4334G	Vdet-IC	3.4V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0T0	ej	XC6101F531MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0T1	ej	XC6101F532MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0T2	ej	XC6101F533MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0T3	ej	XC6101F534MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0T4	ej	XC6101F535MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0T5	ej	XC6101F536MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0T6	ej	XC6101F537MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0T7	ej	XC6101F538MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0T8	ej	XC6101F539MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0T9	ej	XC6101F540MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TA	ej	XC6101F541MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TB	ej	XC6101F542MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TC	ej	XC6101F543MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TD	ej	XC6101F544MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TE	ej	XC6101F545MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TF	ec	XC6101F516MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TF	ej	XC6101F546MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TH	ec	XC6101F517MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TH	ej	XC6101F547MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TK	ec	XC6101F518MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TK	ej	XC6101F548MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TL	ec	XC6101F519MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TL	ej	XC6101F549MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TM	ec	XC6101F520MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TM	ej	XC6101F550MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TN	ec	XC6101F521MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TP	ec	XC6101F522MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TR	ec	XC6101F523MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TS	ec	XC6101F524MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TT	ec	XC6101F525MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TU	ec	XC6101F526MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TV	ec	XC6101F527MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TX	ec	XC6101F528MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TY	ec	XC6101F529MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0TZ	ec	XC6101F530MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0U	-	BU4335FWE	Vdet-IC	3.5V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0U	-	BU4335G	Vdet-IC	3.5V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0U0	ej	XC6101F631MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0U1	ej	XC6101F632MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0U2	ej	XC6101F633MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0U3	ej	XC6101F634MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0U4	ej	XC6101F635MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0U5	ej	XC6101F636MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0U6	ej	XC6101F637MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0U7	ej	XC6101F638MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0U8	ej	XC6101F639MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0U9	ej	XC6101F640MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UA	ej	XC6101F641MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UB	ej	XC6101F642MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UC	ej	XC6101F643MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UD	ej	XC6101F644MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UE	ej	XC6101F645MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UF	ec	XC6101F616MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UF	ej	XC6101F646MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UH	ec	XC6101F617MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UH	ej	XC6101F647MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UK	ec	XC6101F618MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UK	ej	XC6101F648MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UL	ec	XC6101F619MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UL	ej	XC6101F649MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UM	ec	XC6101F620MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UM	ej	XC6101F650MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UN	ec	XC6101F621MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UP	ec	XC6101F622MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UR	ec	XC6101F623MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0US	ec	XC6101F624MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UT	ec	XC6101F625MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UU	ec	XC6101F626MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UV	ec	XC6101F627MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UX	ec	XC6101F628MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UY	ec	XC6101F629MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0UZ	ec	XC6101F630MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
0V	-	BU4336FWE	Vdet-IC	3.6V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0V	-	BU4336G	Vdet-IC	3.6V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0V0	ej	XC6101H631MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0V1	ej	XC6101H632MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0V2	ej	XC6101H633MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0V3	ej	XC6101H634MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0V4	ej	XC6101H635MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0V5	ej	XC6101H636MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0V6	ej	XC6101H637MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0V7	-	XC6210A082MR	LVR-IC	LDO, 0.8V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0V7	-	XC6221C081MR	LVR-IC	LDO, 0.8V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0V7	ej	XC6101H638MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0V8	-	XC6210A092MR	LVR-IC	LDO, 0.9V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0V8	-	XC6221C091MR	LVR-IC	LDO, 0.9V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0V8	ej	XC6101H639MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0V9	-	XC6210A102MR	LVR-IC	LDO, 1.0V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0V9	-	XC6221C101MR	LVR-IC	LDO, 1.0V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0V9	ej	XC6101H640MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VA	-	XC6210A112MR	LVR-IC	LDO, 1.1V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VA	-	XC6221C111MR	LVR-IC	LDO, 1.1V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VA	ej	XC6101H641MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VB	-	XC6210A122MR	LVR-IC	LDO, 1.2V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VB	-	XC6221C121MR	LVR-IC	LDO, 1.2V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VB	ej	XC6101H642MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VC	-	XC6210A132MR	LVR-IC	LDO, 1.3V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VC	-	XC6221C131MR	LVR-IC	LDO, 1.3V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VC	ej	XC6101H643MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VD	-	XC6210A142MR	LVR-IC	LDO, 1.4V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VD	-	XC6221C141MR	LVR-IC	LDO, 1.4V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VD	ej	XC6101H644MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VE	-	LN6210A152M	LVR-IC	LDO, 1.5V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0VE	-	XC6210A152MR	LVR-IC	LDO, 1.5V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VE	-	XC6221C151MR	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0VE	ej	XC6101H645MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VF	-	LN6210A162M	LVR-IC	LDO, 1.6V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0VF	-	XC6210A162MR	LVR-IC	LDO, 1.6V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VF	-	XC6221C161MR	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VF	ec	XC6101H616MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VF	ej	XC6101H646MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VH	-	LN6210A172M	LVR-IC	LDO, 1.7V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0VH	-	XC6210A172MR	LVR-IC	LDO, 1.7V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VH	-	XC6221C171MR	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VH	ec	XC6101H617MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VH	ej	XC6101H647MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VK	-	LN6210A182M	LVR-IC	LDO, 1.8V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0VK	-	XC6210A182MR	LVR-IC	LDO, 1.8V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VK	-	XC6221C181MR	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VK	ec	XC6101H618MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VK	ej	XC6101H648MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VL	-	LN6210A192M	LVR-IC	LDO, 1.9V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0VL	-	XC6210A192MR	LVR-IC	LDO, 1.9V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VL	-	XC6221C191MR	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VL	ec	XC6101H619MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VL	ej	XC6101H649MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VM	-	LN6210A202M	LVR-IC	LDO, 2.0V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0VM	-	XC6210A202MR	LVR-IC	LDO, 2.0V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VM	-	XC6221C201MR	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VM	ec	XC6101H620MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VM	ej	XC6101H650MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VN	-	LN6210A212M	LVR-IC	LDO, 2.1V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0VN	-	XC6210A212MR	LVR-IC	LDO, 2.1V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VN	-	XC6221C211MR	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VN	ec	XC6101H621MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VP	-	LN6210A222M	LVR-IC	LDO, 2.2V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0VP	-	XC6210A222MR	LVR-IC	LDO, 2.2V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VP	-	XC6221C221MR	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VP	ec	XC6101H622MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VR	-	LN6210A232M	LVR-IC	LDO, 2.3V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0VR	-	XC6210A232MR	LVR-IC	LDO, 2.3V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VR	-	XC6221C231MR	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VR	ec	XC6101H623MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VS	-	LN6210A242M	LVR-IC	LDO, 2.4V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0VS	-	XC6210A242MR	LVR-IC	LDO, 2.4V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VS	-	XC6221C241MR	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VS	ec	XC6101H624MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VT	-	LN6210A252M	LVR-IC	LDO, 2.5V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0VT	-	XC6210A252MR	LVR-IC	LDO, 2.5V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VT	-	XC6221C251MR	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VT	ec	XC6101H625MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VU	-	LN6210A262M	LVR-IC	LDO, 2.6V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0VU	-	XC6210A262MR	LVR-IC	LDO, 2.6V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VU	-	XC6221C261MR	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VU	ec	XC6101H626MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VV	-	LN6210A272M	LVR-IC	LDO, 2.7V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0VV	-	XC6210A272MR	LVR-IC	LDO, 2.7V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VV	-	XC6221C271MR	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VV	ec	XC6101H627MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VX	-	LN6210A282M	LVR-IC	LDO, 2.8V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0VX	-	XC6210A282MR	LVR-IC	LDO, 2.8V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VX	-	XC6221C281MR	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VX	ec	XC6101H628MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VY	-	LN6210A292M	LVR-IC	LDO, 2.9V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0VY	-	XC6210A292MR	LVR-IC	LDO, 2.9V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VY	-	XC6221C291MR	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VY	ec	XC6101H629MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0VZ	-	LN6210A302M	LVR-IC	LDO, 3.0V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Nln
0VZ	-	XC6210A302MR	LVR-IC	LDO, 3.0V±2%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VZ	-	XC6221C301MR	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
0VZ	ec	XC6101H630MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
0W	-	BU4337FWE	Vdet-IC	3.7V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0W	-	BU4337G	Vdet-IC	3.7V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0W	-	R1210N301C	DC-DC-IC	PWM step-up, 3V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
0X	-	BU4338FWE	Vdet-IC	3.8V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0X	-	BU4338G	Vdet-IC	3.8V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0X	-	R1210N401C	DC-DC-IC	PWM step-up, 4V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
0X=	-	RT9193-36GB	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
0X0	-	XC6221D311MR	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0X7	-	XC6210B082MR	LVR-IC	LDO, 0.8V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0X7	-	XC6221D081MR	LVR-IC	LDO, 0.8V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0X8	-	XC6210B092MR	LVR-IC	LDO, 0.9V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0X8	-	XC6221D091MR	LVR-IC	LDO, 0.9V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0X9	-	XC6210B102MR	LVR-IC	LDO, 1.0V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0X9	-	XC6221D101MR	LVR-IC	LDO, 1.0V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XA	-	XC6210B112MR	LVR-IC	LDO, 1.1V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XA	-	XC6221D111MR	LVR-IC	LDO, 1.1V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XB	-	XC6210B122MR	LVR-IC	LDO, 1.2V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XB	-	XC6221D121MR	LVR-IC	LDO, 1.2V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XC	-	XC6210B132MR	LVR-IC	LDO, 1.3V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XC	-	XC6221D131MR	LVR-IC	LDO, 1.3V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XD	-	XC6210B142MR	LVR-IC	LDO, 1.4V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XD	-	XC6221D141MR	LVR-IC	LDO, 1.4V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XE	-	LN6210B152M	LVR-IC	LDO, 1.5V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0XE	-	XC6210B152MR	LVR-IC	LDO, 1.5V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XE	-	XC6221D151MR	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XF	-	LN6210B162M	LVR-IC	LDO, 1.6V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0XF	-	XC6210B162MR	LVR-IC	LDO, 1.6V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XF	-	XC6221D161MR	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XH	-	LN6210B172M	LVR-IC	LDO, 1.7V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0XH	-	XC6210B172MR	LVR-IC	LDO, 1.7V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XH	-	XC6221D171MR	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XK	-	LN6210B182M	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0XK	-	XC6210B182MR	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XK	-	XC6221D181MR	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XL	-	LN6210B192M	LVR-IC	LDO, 1.9V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0XL	-	XC6210B192MR	LVR-IC	LDO, 1.9V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XL	-	XC6221D191MR	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XM	-	LN6210B202M	LVR-IC	LDO, 2.0V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0XM	-	XC6210B202MR	LVR-IC	LDO, 2.0V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XM	-	XC6221D201MR	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XN	-	LN6210B212M	LVR-IC	LDO, 2.1V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0XN	-	XC6210B212MR	LVR-IC	LDO, 2.1V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XN	-	XC6221D211MR	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XP	-	LN6210B222M	LVR-IC	LDO, 2.2V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0XP	-	XC6210B222MR	LVR-IC	LDO, 2.2V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XP	-	XC6221D221MR	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XR	-	LN6210B232M	LVR-IC	LDO, 2.3V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0XR	-	XC6210B232MR	LVR-IC	LDO, 2.3V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XR	-	XC6221D231MR	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XS	-	LN6210B242M	LVR-IC	LDO, 2.4V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0XS	-	XC6210B242MR	LVR-IC	LDO, 2.4V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XS	-	XC6221D241MR	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XT	-	LN6210B252M	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0XT	-	XC6210B252MR	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XT	-	XC6221D251MR	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XU	-	LN6210B262M	LVR-IC	LDO, 2.6V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0XU	-	XC6210B262MR	LVR-IC	LDO, 2.6V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XU	-	XC6221D261MR	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XV	-	LN6210B272M	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0XV	-	XC6210B272MR	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XV	-	XC6221D271MR	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XX	-	LN6210B282M	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0XX	-	XC6210B282MR	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XX	-	XC6221D281MR	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XY	-	LN6210B292M	LVR-IC	LDO, 2.9V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0XY	-	XC6210B292MR	LVR-IC	LDO, 2.9V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XY	-	XC6221D291MR	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0XZ	-	LN6210B302M	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Nln
0XZ	-	XC6210B302MR	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
0XZ	-	XC6221D301MR	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
0Y	-	BU4339FWE	Vdet-IC	3.9V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0Y	-	BU4339G	Vdet-IC	3.9V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0Y	-	R1210N501C	DC-DC-IC	PWM step-up, 5V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
0Y7	-	XC6210C082MR	LVR-IC	LDO, 0.8V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0Y8	-	XC6210C092MR	LVR-IC	LDO, 0.9V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0Y9	-	XC6210C102MR	LVR-IC	LDO, 1.0V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YA	-	XC6210C112MR	LVR-IC	LDO, 1.1V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YB	-	XC6210C122MR	LVR-IC	LDO, 1.2V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YC	-	XC6210C132MR	LVR-IC	LDO, 1.3V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YD	-	XC6210C142MR	LVR-IC	LDO, 1.4V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YE	-	LN6210C152M	LVR-IC	LDO, 1.5V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0YE	-	XC6210C152MR	LVR-IC	LDO, 1.5V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YF	-	LN6210C162M	LVR-IC	LDO, 1.6V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0YF	-	XC6210C162MR	LVR-IC	LDO, 1.6V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YH	-	LN6210C172M	LVR-IC	LDO, 1.7V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0YH	-	XC6210C172MR	LVR-IC	LDO, 1.7V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YK	-	LN6210C182M	LVR-IC	LDO, 1.8V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0YK	-	XC6210C182MR	LVR-IC	LDO, 1.8V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YL	-	LN6210C192M	LVR-IC	LDO, 1.9V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0YL	-	XC6210C192MR	LVR-IC	LDO, 1.9V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YM	-	LN6210C202M	LVR-IC	LDO, 2.0V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0YM	-	XC6210C202MR	LVR-IC	LDO, 2.0V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YN	-	LN6210C212M	LVR-IC	LDO, 2.1V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0YN	-	XC6210C212MR	LVR-IC	LDO, 2.1V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YP	-	LN6210C222M	LVR-IC	LDO, 2.2V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0YP	-	XC6210C222MR	LVR-IC	LDO, 2.2V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YR	-	LN6210C232M	LVR-IC	LDO, 2.3V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0YR	-	XC6210C232MR	LVR-IC	LDO, 2.3V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YS	-	LN6210C242M	LVR-IC	LDO, 2.4V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0YS	-	XC6210C242MR	LVR-IC	LDO, 2.4V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YT	-	LN6210C252M	LVR-IC	LDO, 2.5V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0YT	-	XC6210C252MR	LVR-IC	LDO, 2.5V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YU	-	LN6210C262M	LVR-IC	LDO, 2.6V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0YU	-	XC6210C262MR	LVR-IC	LDO, 2.6V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YV	-	LN6210C272M	LVR-IC	LDO, 2.7V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0YV	-	XC6210C272MR	LVR-IC	LDO, 2.7V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YX	-	LN6210C282M	LVR-IC	LDO, 2.8V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0YX	-	XC6210C282MR	LVR-IC	LDO, 2.8V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YY	-	LN6210C292M	LVR-IC	LDO, 2.9V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0YY	-	XC6210C292MR	LVR-IC	LDO, 2.9V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0YZ	-	LN6210C302M	LVR-IC	LDO, 3.0V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Nln
0YZ	-	XC6210C302MR	LVR-IC	LDO, 3.0V±2%, 700mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
0Z	-	BU4340FWE	Vdet-IC	4.0V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
0Z	-	BU4340G	Vdet-IC	4.0V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
0Z0	-	XC6210D102MR	LVR-IC	LDO, 1.0V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0Z7	-	XC6210D082MR	LVR-IC	LDO, 0.8V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0Z8	-	XC6210D092MR	LVR-IC	LDO, 0.9V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZA	-	XC6210D112MR	LVR-IC	LDO, 1.1V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZB	-	XC6210D122MR	LVR-IC	LDO, 1.2V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZC	-	XC6210D132MR	LVR-IC	LDO, 1.3V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZD	-	XC6210D142MR	LVR-IC	LDO, 1.4V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZE	-	LN6210D152M	LVR-IC	LDO, 1.5V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0ZE	-	XC6210D152MR	LVR-IC	LDO, 1.5V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZF	-	LN6210D162M	LVR-IC	LDO, 1.6V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0ZF	-	XC6210D162MR	LVR-IC	LDO, 1.6V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZH	-	LN6210D172M	LVR-IC	LDO, 1.7V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0ZH	-	XC6210D172MR	LVR-IC	LDO, 1.7V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZK	-	LN6210D182M	LVR-IC	LDO, 1.8V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0ZK	-	XC6210D182MR	LVR-IC	LDO, 1.8V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZL	-	LN6210D192M	LVR-IC	LDO, 1.9V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0ZL	-	XC6210D192MR	LVR-IC	LDO, 1.9V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZM	-	LN6210D202M	LVR-IC	LDO, 2.0V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0ZM	-	XC6210D202MR	LVR-IC	LDO, 2.0V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZN	-	LN6210D212M	LVR-IC	LDO, 2.1V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0ZN	-	XC6210D212MR	LVR-IC	LDO, 2.1V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZP	-	LN6210D222M	LVR-IC	LDO, 2.2V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0ZP	-	XC6210D222MR	LVR-IC	LDO, 2.2V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZR	-	LN6210D232M	LVR-IC	LDO, 2.3V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0ZR	-	XC6210D232MR	LVR-IC	LDO, 2.3V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZS	-	LN6210D242M	LVR-IC	LDO, 2.4V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0ZS	-	XC6210D242MR	LVR-IC	LDO, 2.4V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZT	-	LN6210D252M	LVR-IC	LDO, 2.5V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0ZT	-	XC6210D252MR	LVR-IC	LDO, 2.5V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZU	-	LN6210D262M	LVR-IC	LDO, 2.6V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0ZU	-	XC6210D262MR	LVR-IC	LDO, 2.6V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZV	-	LN6210D272M	LVR-IC	LDO, 2.7V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0ZV	-	XC6210D272MR	LVR-IC	LDO, 2.7V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZX	-	LN6210D282M	LVR-IC	LDO, 2.8V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0ZX	-	XC6210D282MR	LVR-IC	LDO, 2.8V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZY	-	LN6210D292M	LVR-IC	LDO, 2.9V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0ZY	-	XC6210D292MR	LVR-IC	LDO, 2.9V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
0ZZ	-	LN6210D302M	LVR-IC	LDO, 3.0V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Nln
0ZZ	-	XC6210D302MR	LVR-IC	LDO, 3.0V±2%, 700mA, -CE	SOT-25	28cx	VR4	6g	Tor
10	-	R1223N302D	DC-DC-IC	PWM step-down, +CE, 3V±2%, 500kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
10	-	RN5RF60BA	LVR-IC	LRip, +CE, 6V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
10	-	RN5RZ60BA	LVR-IC	LDO, LN, 6V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
100	ej	XC6102A131MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
100AC	-	BL8509-100ACRN	Vdet-IC	1.0V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
100AC	-	LC9009CB5TR100AC	Vdet-IC	1.0V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
100AN	-	BL8509-100ANRN	Vdet-IC	1.0V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
100AN	-	LC9009CB5TR100AN	Vdet-IC	1.0V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
100BC	-	BL8509-100BCRN	Vdet-IC	1.0V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
100BC	-	LC9009CB5TR100BC	Vdet-IC	1.0V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
100BN	-	BL8509-100BNRN	Vdet-IC	1.0V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
100BN	-	LC9009CB5TR100BN	Vdet-IC	1.0V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
100CC	-	BL8509-100CCRN	Vdet-IC	1.0V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
100CC	-	LC9009CB5TR100CC	Vdet-IC	1.0V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
100CN	-	BL8509-100CNRN	Vdet-IC	1.0V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
100CN	-	LC9009CB5TR100CN	Vdet-IC	1.0V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
100DC	-	BL8509-100DCRN	Vdet-IC	1.0V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
100DC	-	LC9009CB5TR100DC	Vdet-IC	1.0V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
100DN	-	BL8509-100DNRN	Vdet-IC	1.0V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
100DN	-	LC9009CB5TR100DN	Vdet-IC	1.0V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
100EC	-	BL8509-100ECRN	Vdet-IC	1.0V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
100EC	-	LC9009CB5TR100EC	Vdet-IC	1.0V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
100EN	-	BL8509-100ENRN	Vdet-IC	1.0V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
100EN	-	LC9009CB5TR100EN	Vdet-IC	1.0V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
100FC	-	BL8509-100FCRN	Vdet-IC	1.0V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
100FC	-	LC9009CB5TR100FC	Vdet-IC	1.0V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
100FN	-	BL8509-100FNRN	Vdet-IC	1.0V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
100FN	-	LC9009CB5TR100FN	Vdet-IC	1.0V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
100GC	-	BL8509-100GCRN	Vdet-IC	1.0V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
100GC	-	LC9009CB5TR100GC	Vdet-IC	1.0V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
100GN	-	BL8509-100GNRN	Vdet-IC	1.0V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
100GN	-	LC9009CB5TR100GN	Vdet-IC	1.0V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
101	ej	XC6102A132MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
102	ej	XC6102A133MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
103	ej	XC6102A134MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
104	ej	XC6102A135MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
105	-	APL5101-12BI	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
105	-	APL5102-12BI	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
105	ej	XC6102A136MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
106	ej	XC6102A137MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
107	-	APL5101-13BI	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
107	ej	XC6102A138MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
108	-	APL5101-14BI	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
108	-	R1160N081B	LVR-IC	LDO, 0.8V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
108	ej	XC6102A139MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
109	-	APL5101-15BI	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
109	-	R1160N091B	LVR-IC	LDO, 0.9V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
109	ej	XC6102A140MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10A	-	APL5101-16BI	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10A	ej	XC6102A141MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10B	-	APL5101-17BI	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10B	ej	XC6102A142MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10C	-	APL5101-18BI	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10C	ej	XC6102A143MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10D	-	APL5101-19BI	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10D	ej	XC6102A144MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10E	-	APL5101-20BI	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10E	ej	XC6102A145MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10F	-	APL5101-21BI	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10F	ec	XC6102A116MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10F	ej	XC6102A146MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
10G	-	APL5101-22BI	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10H	-	APL5101-23BI	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10H	ec	XC6102A117MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10H	ej	XC6102A147MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10I	-	APL5101-24BI	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10J	-	APL5101-25BI	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10K	-	APL5101-26BI	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10K	ec	XC6102A118MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10K	ej	XC6102A148MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10L	-	APL5101-27BI	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10L	ec	XC6102A119MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10L	ej	XC6102A149MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10M	-	APL5101-28BI	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10M	ec	XC6102A120MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10M	ej	XC6102A150MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10N	-	APL5101-29BI	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10N	ec	XC6102A121MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10O	-	APL5101-30BI	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10P	-	APL5101-31BI	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10P	ec	XC6102A122MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10Q	-	APL5101-32BI	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10R	-	APL5101-33BI	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10R	ec	XC6102A123MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10S	-	APL5101-34BI	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10S	ec	XC6102A124MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10T	-	APL5101-35BI	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Anp
10T	ec	XC6102A125MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10U	ec	XC6102A126MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10V	ec	XC6102A127MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10X	ec	XC6102A128MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10Y	ec	XC6102A129MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
10Z	-	MAZL100H	SA-Z-diode	Quad, 10V, 5mA, 200mW	SC-74A	28	D16	6a	Pan
10Z	-	MAZM100H	SA-Z-diode	Quad, 10V, 5mA, 150mW	SSMini5	30	D16	6a	Pan
10Z	-	MAZZ100H	SA-Z-diode	Quad, 10V, 5mA, 200mW	SMini5	30	D16	6a	Pan
10Z	ec	XC6102A130MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11	-	BU4S11G2	CMOS-Log	2-input NAND gate	SSOP-5	28	Log1	6c	Rhm
11	-	R1223N332D	DC-DC-IC	PWM step-down, +CE, 3.3V±2%, 500kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
110	-	R1160N101B	LVR-IC	LDO, 1.0V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
110	ej	XC6102A231MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
110AC	-	BL8509-110ACRN	Vdet-IC	1.1V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
110AC	-	LC9009CB5TR110AC	Vdet-IC	1.1V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
110AN	-	BL8509-110ANRN	Vdet-IC	1.1V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
110AN	-	LC9009CB5TR110AN	Vdet-IC	1.1V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
110BC	-	BL8509-110BCRN	Vdet-IC	1.1V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
110BC	-	LC9009CB5TR110BC	Vdet-IC	1.1V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
110BN	-	BL8509-110BNRN	Vdet-IC	1.1V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
110BN	-	LC9009CB5TR110BN	Vdet-IC	1.1V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
110CC	-	BL8509-110CCRN	Vdet-IC	1.1V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
110CC	-	LC9009CB5TR110CC	Vdet-IC	1.1V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
110CN	-	BL8509-110CNRN	Vdet-IC	1.1V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
110CN	-	LC9009CB5TR110CN	Vdet-IC	1.1V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
110DC	-	BL8509-110DCRN	Vdet-IC	1.1V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
110DC	-	LC9009CB5TR110DC	Vdet-IC	1.1V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
110DN	-	BL8509-110DNRN	Vdet-IC	1.1V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
110DN	-	LC9009CB5TR110DN	Vdet-IC	1.1V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
110EC	-	BL8509-110ECRN	Vdet-IC	1.1V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
110EC	-	LC9009CB5TR110EC	Vdet-IC	1.1V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
110EN	-	BL8509-110ENRN	Vdet-IC	1.1V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
110EN	-	LC9009CB5TR110EN	Vdet-IC	1.1V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
110FC	-	BL8509-110FCRN	Vdet-IC	1.1V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
110FC	-	LC9009CB5TR110FC	Vdet-IC	1.1V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
110FN	-	BL8509-110FNRN	Vdet-IC	1.1V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
110FN	-	LC9009CB5TR110FN	Vdet-IC	1.1V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
110GC	-	BL8509-110GCRN	Vdet-IC	1.1V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
110GC	-	LC9009CB5TR110GC	Vdet-IC	1.1V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
110GN	-	BL8509-110GNRN	Vdet-IC	1.1V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
110GN	-	LC9009CB5TR110GN	Vdet-IC	1.1V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
111	-	R1160N111B	LVR-IC	LDO, 1.1V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
111	ej	XC6102A232MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
112	-	R1160N121B	LVR-IC	LDO, 1.2V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
112	ej	XC6102A233MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
113	-	R1160N131B	LVR-IC	LDO, 1.3V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
113	ej	XC6102A234MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
114	-	R1160N141B	LVR-IC	LDO, 1.4V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
114	ej	XC6102A235MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
115	-	R1116N151D	LVR-IC	LDO, Low noise, 1.5V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
115	-	R1160N151B	LVR-IC	LDO, 1.5V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
115	ej	XC6102A236MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
116	-	R1116N161D	LVR-IC	LDO, Low noise, 1.6V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
116	-	R1160N161B	LVR-IC	LDO, 1.6V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
116	ej	XC6102A237MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
117	-	R1116N171D	LVR-IC	LDO, Low noise, 1.7V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
117	-	R1160N171B	LVR-IC	LDO, 1.7V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
117	ej	XC6102A238MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
118	-	R1116N181D	LVR-IC	LDO, Low noise, 1.8V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
118	-	R1160N181B	LVR-IC	LDO, 1.8V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
118	ej	XC6102A239MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
118A	-	AAT60118A-S5	Vdet-IC	1.8V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
118B	-	AAT60118B-S5	Vdet-IC	1.8V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
118C	-	AAT60118C-S5	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
118D	-	AAT60118D-S5	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
119	-	R1116N191D	LVR-IC	LDO, Low noise, 1.9V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
119	-	R1160N191B	LVR-IC	LDO, 1.9V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
119	ej	XC6102A240MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
119A	-	AAT60119A-S5	Vdet-IC	1.9V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
119B	-	AAT60119B-S5	Vdet-IC	1.9V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
119C	-	AAT60119C-S5	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
119D	-	AAT60119D-S5	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD6	6g	Aat
11A	-	APR3011-15B	Vdet-IC	1.5V±1.5%, -Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
11A	ej	XC6102A241MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11B	-	APR3011-17B	Vdet-IC	1.75V±1.5%, -Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
11B	ej	XC6102A242MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11C	-	APR3011-23B	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
11C	-	R1182N121D	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
11C	ej	XC6102A243MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11D	-	APR3011-26B	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
11D	-	R1182N131D	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
11D	ej	XC6102A244MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11E	-	APR3011-29B	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
11E	-	R1182N141D	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
11E	ej	XC6102A245MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11F	-	APR3011-30B	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
11F	-	R1182N151D	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
11F	ec	XC6102A216MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11F	ej	XC6102A246MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11G	-	APR3011-39B	Vdet-IC	3.9V±1.5%, -Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
11G	-	R1182N161D	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
11H	-	APR3011-43B	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
11H	-	R1182N171D	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
11H	ec	XC6102A217MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11H	ej	XC6102A247MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11J	-	APR3011-46B	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
11J	-	R1182N181D	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
11K	-	R1182N191D	LVR-IC	LDO, 1.9V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
11K	ec	XC6102A218MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11K	ej	XC6102A248MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11L	ec	XC6102A219MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11L	ej	XC6102A249MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11M	ec	XC6102A220MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11M	ej	XC6102A250MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11N	ec	XC6102A221MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11P	ec	XC6102A222MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11R	ec	XC6102A223MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11S	ec	XC6102A224MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11T	ec	XC6102A225MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11U	ec	XC6102A226MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11V	ec	XC6102A227MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11X	ec	XC6102A228MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11Y	ec	XC6102A229MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
11Z	ec	XC6102A230MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
12	-	BU4S01G2	CMOS-Log	2-input NOR gate	SSOP-5	28	Log2	6c	Rhm
12	-	BU4S81G2	CMOS-Log	2-input AND gate	SSOP-5	28	Log3	6c	Rhm
12	-	R1223N502D	DC-DC-IC	PWM step-down, +CE, 5V±2%, 500kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
120	-	R1116N201D	LVR-IC	LDO, Low noise, 2.0V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
120	-	R1160N201B	LVR-IC	LDO, 2.0V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
120	ej	XC6102A331MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
120A	-	AAT60120A-S5	Vdet-IC	2.0V±2%, +Reset ODO	SOT-23-5	28vdm	VD7	6g	Aat
120AC	-	BL8509-120ACRN	Vdet-IC	1.2V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
120AC	-	LC9009CB5TR120AC	Vdet-IC	1.2V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
120AN	-	BL8509-120ANRN	Vdet-IC	1.2V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
120AN	-	LC9009CB5TR120AN	Vdet-IC	1.2V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
120B	-	AAT60120B-S5	Vdet-IC	2.0V±2%, +Reset PPO	SOT-23-5	28vdm	VD6	6g	Aat
120BC	-	BL8509-120BCRN	Vdet-IC	1.2V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
120BC	-	LC9009CB5TR120BC	Vdet-IC	1.2V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
120BN	-	BL8509-120BNRN	Vdet-IC	1.2V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
120BN	-	LC9009CB5TR120BN	Vdet-IC	1.2V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
120C	-	AAT60120C-S5	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
120CC	-	BL8509-120CCRN	Vdet-IC	1.2V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
120CC	-	LC9009CB5TR120CC	Vdet-IC	1.2V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
120CN	-	BL8509-120CNRN	Vdet-IC	1.2V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
120CN	-	LC9009CB5TR120CN	Vdet-IC	1.2V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
120D	-	AAT60120D-S5	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
120DC	-	BL8509-120DCRN	Vdet-IC	1.2V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
120DC	-	LC9009CB5TR120DC	Vdet-IC	1.2V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
120DN	-	BL8509-120DNRN	Vdet-IC	1.2V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
120DN	-	LC9009CB5TR120DN	Vdet-IC	1.2V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
120EC	-	BL8509-120ECRN	Vdet-IC	1.2V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
120EC	-	LC9009CB5TR120EC	Vdet-IC	1.2V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
120EN	-	BL8509-120ENRN	Vdet-IC	1.2V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
120EN	-	LC9009CB5TR120EN	Vdet-IC	1.2V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
120FC	-	BL8509-120FCRN	Vdet-IC	1.2V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
120FC	-	LC9009CB5TR120FC	Vdet-IC	1.2V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
120FN	-	BL8509-120FNRN	Vdet-IC	1.2V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
120FN	-	LC9009CB5TR120FN	Vdet-IC	1.2V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
120GC	-	BL8509-120GCRN	Vdet-IC	1.2V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
120GC	-	LC9009CB5TR120GC	Vdet-IC	1.2V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
120GN	-	BL8509-120GNRN	Vdet-IC	1.2V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
120GN	-	LC9009CB5TR120GN	Vdet-IC	1.2V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
121	-	R1116N211D	LVR-IC	LDO, Low noise, 2.1V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
121	-	R1160N211B	LVR-IC	LDO, 2.1V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
121	ej	XC6102A332MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
121A	-	AAT60121A-S5	Vdet-IC	2.1V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
121B	-	AAT60121B-S5	Vdet-IC	2.1V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
121C	-	AAT60121C-S5	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
121D	-	AAT60121D-S5	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
122	-	R1116N221D	LVR-IC	LDO, Low noise, 2.2V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
122	-	R1160N221B	LVR-IC	LDO, 2.2V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
122	ej	XC6102A333MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
122A	-	AAT60122A-S5	Vdet-IC	2.2V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
122B	-	AAT60122B-S5	Vdet-IC	2.2V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
122C	-	AAT60122C-S5	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
122D	-	AAT60122D-S5	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
123	-	R1116N231D	LVR-IC	LDO, Low noise, 2.3V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
123	-	R1160N231B	LVR-IC	LDO, 2.3V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
123	ej	XC6102A334MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
123A	-	AAT60123A-S5	Vdet-IC	2.3V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
123B	-	AAT60123B-S5	Vdet-IC	2.3V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
123C	-	AAT60123C-S5	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
123D	-	AAT60123D-S5	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
124	-	R1116N241D	LVR-IC	LDO, Low noise, 2.4V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
124	-	R1160N241B	LVR-IC	LDO, 2.4V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
124	ej	XC6102A335MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
124A	-	AAT60124A-S5	Vdet-IC	2.4V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
124B	-	AAT60124B-S5	Vdet-IC	2.4V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
124C	-	AAT60124C-S5	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
124D	-	AAT60124D-S5	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
125	-	R1116N251D	LVR-IC	LDO, Low noise, 2.5V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
125	-	R1160N251B	LVR-IC	LDO, 2.5V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
125	ej	XC6102A336MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
125A	-	AAT60125A-S5	Vdet-IC	2.5V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
125B	-	AAT60125B-S5	Vdet-IC	2.5V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
125C	-	AAT60125C-S5	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
125D	-	AAT60125D-S5	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
126	-	R1116N261D	LVR-IC	LDO, Low noise, 2.6V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
126	-	R1160N261B	LVR-IC	LDO, 2.6V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
126	ej	XC6102A337MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
126A	-	AAT60126A-S5	Vdet-IC	2.6V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
126B	-	AAT60126B-S5	Vdet-IC	2.6V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
126C	-	AAT60126C-S5	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
126D	-	AAT60126D-S5	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
127	-	R1116N271D	LVR-IC	LDO, Low noise, 2.7V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
127	-	R1160N271B	LVR-IC	LDO, 2.7V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
127	ej	XC6102A338MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
127A	-	AAT60127A-S5	Vdet-IC	2.7V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
127B	-	AAT60127B-S5	Vdet-IC	2.7V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
127C	-	AAT60127C-S5	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
127D	-	AAT60127D-S5	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
128	-	R1116N281D	LVR-IC	LDO, Low noise, 2.8V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
128	-	R1160N281B	LVR-IC	LDO, 2.8V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
128	ej	XC6102A339MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
128A	-	AAT60128A-S5	Vdet-IC	2.8V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
128B	-	AAT602128B-S5	Vdet-IC	2.8V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
128C	-	AAT60128C-S5	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
128D	-	AAT60128D-S5	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
129	-	R1116N291D	LVR-IC	LDO, Low noise, 2.9V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
129	-	R1160N291B	LVR-IC	LDO, 2.9V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
129	ej	XC6102A340MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
129A	-	AAT60129A-S5	Vdet-IC	2.9V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
129B	-	AAT60129B-S5	Vdet-IC	2.9V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
129C	-	AAT60129C-S5	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
129D	-	AAT60129D-S5	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
12A	-	APR3012-15B	Vdet-IC	1.5V±1.5%, +Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
12A	-	MAZK120D	Z-diode	Quad, 12V, Zzt=1Ω (5mA), 200mW	SOT-23-5	28	D16	6a	Pan
12A	-	R1182N201D	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
12A	ej	XC6102A341MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12B	-	APR3012-17B	Vdet-IC	1.75V±1.5%, +Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
12B	-	R1182N211D	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
12B	ej	XC6102A342MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12C	-	APR3012-23B	Vdet-IC	2.32V±1.5%, +Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
12C	-	R1182N221D	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
12C	ej	XC6102A343MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12D	-	APR3012-26B	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
12D	-	MAZL120D	Z-diode	Quad, 12V, Zzt=30Ω (5mA), 200mW	SOT-23-5	28	D16	6a	Pan
12D	-	R1182N231D	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
12D	ej	XC6102A344MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12E	-	APR3012-29B	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
12E	-	R1182N241D	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
12E	ej	XC6102A345MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12F	-	APR3012-30B	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
12F	-	R1182N251D	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
12F	ec	XC6102A316MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12F	ej	XC6102A346MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12G	-	APR3012-39B	Vdet-IC	3.9V±1.5%, +Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
12G	-	R1182N261D	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
12H	-	APR3012-43B	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
12H	-	R1182N271D	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
12H	ec	XC6102A317MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12H	ej	XC6102A347MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12J	-	APR3012-46B	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23-5	28vdg	VD7	6kd	Anp
12J	-	R1182N281D	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
12K	-	R1182N291D	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
12K	ec	XC6102A318MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12K	ej	XC6102A348MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12L	ec	XC6102A319MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12L	ej	XC6102A349MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12M	ec	XC6102A320MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12M	ej	XC6102A350MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12N	ec	XC6102A321MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12P	ec	XC6102A322MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12R	ec	XC6102A323MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
12S	ec	XC6102A324MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12T	ec	XC6102A325MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12U	ec	XC6102A326MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12V	ec	XC6102A327MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12X	ec	XC6102A328MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12Y	ec	XC6102A329MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
12Z	-	MAZL120H	SA-Z-diode	Quad, 12V, Zzt=30Ω(5mA), 200mW	SC-74A	28	D16	6a	Pan
12Z	-	MAZM120H	SA-Z-diode	Quad, 12V, 5mA, 150mW	SSMini5	30	D16	6a	Pan
12Z	-	MAZZ120H	SA-Z-diode	Quad, 12V, 5mA, 200mW	SMini5	30	D16	6a	Pan
12Z	ec	XC6102A330MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13	-	R1223N152A	DC-DC-IC	PWM/VFM step-down, +CE, 1.5V±2%, 300kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
13	-	RN5RF13BA	LVR-IC	LRip, +CE, 1.3V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
130	-	R1116N301D	LVR-IC	LDO, Low noise, 3.0V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
130	-	R1160N301B	LVR-IC	LDO, 3.0V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
130	ej	XC6102A431MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
1301	-	HT7130-1	LVR-IC	LDO, 3.0V±3%, 30mA	SOT-23-5	28vu	VR1	6a	Htk
130A	-	AAT60130A-S5	Vdet-IC	3.0V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
130AC	-	BL8509-130ACRN	Vdet-IC	1.3V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
130AC	-	LC9009CB5TR130AC	Vdet-IC	1.3V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
130AN	-	BL8509-130ANRN	Vdet-IC	1.3V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
130AN	-	LC9009CB5TR130AN	Vdet-IC	1.3V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
130B	-	AAT60130B-S5	Vdet-IC	3.0V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
130BC	-	BL8509-130BCRN	Vdet-IC	1.3V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
130BC	-	LC9009CB5TR130BC	Vdet-IC	1.3V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
130BN	-	BL8509-130BNRN	Vdet-IC	1.3V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
130BN	-	LC9009CB5TR130BN	Vdet-IC	1.3V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
130C	-	AAT60130C-S5	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
130CC	-	BL8509-130CCRN	Vdet-IC	1.3V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
130CC	-	LC9009CB5TR130CC	Vdet-IC	1.3V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
130CN	-	BL8509-130CNRN	Vdet-IC	1.3V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
130CN	-	LC9009CB5TR130CN	Vdet-IC	1.3V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
130D	-	AAT60130D-S5	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
130DC	-	BL8509-130DCRN	Vdet-IC	1.3V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
130DC	-	LC9009CB5TR130DC	Vdet-IC	1.3V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
130DN	-	BL8509-130DNRN	Vdet-IC	1.3V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
130DN	-	LC9009CB5TR130DN	Vdet-IC	1.3V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
130EC	-	BL8509-130ECRN	Vdet-IC	1.3V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
130EC	-	LC9009CB5TR130EC	Vdet-IC	1.3V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
130EN	-	BL8509-130ENRN	Vdet-IC	1.3V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
130EN	-	LC9009CB5TR130EN	Vdet-IC	1.3V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
130FC	-	BL8509-130FCRN	Vdet-IC	1.3V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
130FC	-	LC9009CB5TR130FC	Vdet-IC	1.3V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
130FN	-	BL8509-130FNRN	Vdet-IC	1.3V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
130FN	-	LC9009CB5TR130FN	Vdet-IC	1.3V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
130GC	-	BL8509-130GCRN	Vdet-IC	1.3V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
130GC	-	LC9009CB5TR130GC	Vdet-IC	1.3V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
130GN	-	BL8509-130GNRN	Vdet-IC	1.3V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
130GN	-	LC9009CB5TR130GN	Vdet-IC	1.3V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
131	-	R1116N311D	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
131	-	R1160N311B	LVR-IC	LDO, 3.1V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
131	ej	XC6102A432MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
131A	-	AAT60131A-S5	Vdet-IC	3.1V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
131B	-	AAT60131B-S5	Vdet-IC	3.1V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
131C	-	AAT60131C-S5	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
131D	-	AAT60131D-S5	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
132	-	R1116N321D	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
132	-	R1160N321B	LVR-IC	LDO, 3.2V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
132	ej	XC6102A433MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
132A	-	AAT60132A-S5	Vdet-IC	3.2V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
132B	-	AAT60132B-S5	Vdet-IC	3.2V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
132C	-	AAT60132C-S5	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
132D	-	AAT60132D-S5	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
133	-	R1116N331D	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
133	-	R1160N331B	LVR-IC	LDO, 3.3V±2%, 200mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
133	ej	XC6102A434MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
1331	-	HT7133-1	LVR-IC	LDO, 3.3V±3%, 30mA	SOT-23-5	28vu	VR1	6a	Htk
133A	-	AAT60133A-S5	Vdet-IC	3.3V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
133B	-	AAT60133B-S5	Vdet-IC	3.3V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
133C	-	AAT60133C-S5	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
133D	-	AAT60133D-S5	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
134	-	R1116N341D	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
134	ej	XC6102A435MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
134A	-	AAT60134A-S5	Vdet-IC	3.4V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
134B	-	AAT60134B-S5	Vdet-IC	3.4V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
134C	-	AAT60134C-S5	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
134D	-	AAT60134D-S5	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
135	-	R1116N351D	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
135	ej	XC6102A436MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
135A	-	AAT60135A-S5	Vdet-IC	3.5V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
135B	-	AAT60135B-S5	Vdet-IC	3.5V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
135C	-	AAT60135C-S5	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
135D	-	AAT60135D-S5	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
136	-	R1116N361D	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
136	ej	XC6102A437MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
1361	-	HT7136-1	LVR-IC	LDO, 3.6V±3%, 30mA	SOT-23-5	28vu	VR1	6a	Htk
136A	-	AAT60136A-S5	Vdet-IC	3.6V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
136B	-	AAT60136B-S5	Vdet-IC	3.6V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
136C	-	AAT60136C-S5	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
136D	-	AAT60136D-S5	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
137	-	R1116N371D	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
137	ej	XC6102A438MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
137A	-	AAT60137A-S5	Vdet-IC	3.7V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
137B	-	AAT60137B-S5	Vdet-IC	3.7V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
137C	-	AAT60137C-S5	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
137D	-	AAT60137D-S5	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
138	-	R1116N381D	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
138	ej	XC6102A439MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
138A	-	AAT60138A-S5	Vdet-IC	3.8V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
138B	-	AAT60138B-S5	Vdet-IC	3.8V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
138C	-	AAT60138C-S5	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
138D	-	AAT60138D-S5	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
139	-	R1116N391D	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
139	ej	XC6102A440MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
139A	-	AAT60139A-S5	Vdet-IC	3.9V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
139B	-	AAT60139B-S5	Vdet-IC	3.9V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
139C	-	AAT60139C-S5	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
139D	-	AAT60139D-S5	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
13A	-	APR3013-15B	Vdet-IC	1.5V±1.5%, -Reset ODO	SOT-23-5	28vdg	VD6	6kd	Anp
13A	-	R1182N301D	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
13A	ej	XC6102A441MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13B	-	APR3013-17B	Vdet-IC	1.75V±1.5%, -Reset ODO	SOT-23-5	28vdg	VD6	6kd	Anp
13B	-	R1182N311D	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
13B	ej	XC6102A442MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13C	-	APR3013-23B	Vdet-IC	2.32V±1.5%, -Reset ODO	SOT-23-5	28vdg	VD6	6kd	Anp
13C	-	R1182N321D	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
13C	ej	XC6102A443MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13D	-	APR3013-26B	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23-5	28vdg	VD6	6kd	Anp
13D	-	R1182N331D	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
13D	ej	XC6102A444MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13E	-	APR3013-29B	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23-5	28vdg	VD6	6kd	Anp
13E	-	R1182N341D	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
13E	ej	XC6102A445MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13F	-	APR3013-30B	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23-5	28vdg	VD6	6kd	Anp
13F	-	R1182N351D	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
13F	ec	XC6102A416MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13F	ej	XC6102A446MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13G	-	APR3013-39B	Vdet-IC	3.9V±1.5%, -Reset ODO	SOT-23-5	28vdg	VD6	6kd	Anp
13G	-	R1182N361D	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
13H	-	APR3013-43B	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23-5	28vdg	VD6	6kd	Anp
13H	-	R1182N371D	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
13H	ec	XC6102A417MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13H	ej	XC6102A447MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13J	-	APR3013-46B	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23-5	28vdg	VD6	6kd	Anp
13J	-	R1182N381D	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
13K	-	R1182N391D	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
13K	ec	XC6102A418MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13K	ej	XC6102A448MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13L	-	R1182N401D	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
13L	-	TK71613ASCL	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
13L	ec	XC6102A419MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
13L	ej	XC6102A449MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13M	-	R1182N121D5	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
13M	ec	XC6102A420MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13M	ej	XC6102A450MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13N	-	R1182N181D5	LVR-IC	LDO, 1.85V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
13N	ec	XC6102A421MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13P	-	R1182N291D5	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, CL	SOT-23-5	28vrt	VR4	6g	Ric
13P	ec	XC6102A422MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13R	ec	XC6102A423MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13S	ec	XC6102A424MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13T	ec	XC6102A425MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13U	ec	XC6102A426MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13V	ec	XC6102A427MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13X	ec	XC6102A428MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13Y	ec	XC6102A429MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
13Z	ec	XC6102A430MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14	-	BU4S71G2	CMOS-Log	2-input OR gate	SSOP-5	28	Log4	6c	Rhm
14	-	R1223N182A	DC-DC-IC	PWM/VFM step-down, +CE, 1.8V±2%, 300kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
140	-	R1116N401D	LVR-IC	LDO, Low noise, 4.0V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
140	ej	XC6102A531MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
140A	-	AAT60140A-S5	Vdet-IC	4.0V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
140AC	-	BL8509-140ACRN	Vdet-IC	1.4V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
140AC	-	LC9009CB5TR140AC	Vdet-IC	1.4V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
140AN	-	BL8509-140ANRN	Vdet-IC	1.4V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
140AN	-	LC9009CB5TR140AN	Vdet-IC	1.4V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
140B	-	AAT60140B-S5	Vdet-IC	4.0V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
140BC	-	BL8509-140BCRN	Vdet-IC	1.4V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
140BC	-	LC9009CB5TR140BC	Vdet-IC	1.4V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
140BN	-	BL8509-140BNRN	Vdet-IC	1.4V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
140BN	-	LC9009CB5TR140BN	Vdet-IC	1.4V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
140C	-	AAT60140C-S5	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
140CC	-	BL8509-140CCRN	Vdet-IC	1.4V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
140CC	-	LC9009CB5TR140CC	Vdet-IC	1.4V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
140CN	-	BL8509-140CNRN	Vdet-IC	1.4V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
140CN	-	LC9009CB5TR140CN	Vdet-IC	1.4V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
140D	-	AAT60140D-S5	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
140DC	-	BL8509-140DCRN	Vdet-IC	1.4V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
140DC	-	LC9009CB5TR140DC	Vdet-IC	1.4V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
140DN	-	BL8509-140DNRN	Vdet-IC	1.4V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
140DN	-	LC9009CB5TR140DN	Vdet-IC	1.4V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
140EC	-	BL8509-140ECRN	Vdet-IC	1.4V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
140EC	-	LC9009CB5TR140EC	Vdet-IC	1.4V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
140EN	-	BL8509-140ENRN	Vdet-IC	1.4V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
140EN	-	LC9009CB5TR140EN	Vdet-IC	1.4V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
140FC	-	BL8509-140FCRN	Vdet-IC	1.4V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
140FC	-	LC9009CB5TR140FC	Vdet-IC	1.4V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
140FN	-	BL8509-140FNRN	Vdet-IC	1.4V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
140FN	-	LC9009CB5TR140FN	Vdet-IC	1.4V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
140GC	-	BL8509-140GCRN	Vdet-IC	1.4V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
140GC	-	LC9009CB5TR140GC	Vdet-IC	1.4V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
140GN	-	BL8509-140GNRN	Vdet-IC	1.4V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
140GN	-	LC9009CB5TR140GN	Vdet-IC	1.4V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
141	-	R1116N181D5	LVR-IC	LDO, Low noise, 1.85V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
141	ej	XC6102A532MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
141A	-	AAT60141A-S5	Vdet-IC	4.1V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
141B	-	AAT60141B-S5	Vdet-IC	4.1V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
141C	-	AAT60141C-S5	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
141D	-	AAT60141D-S5	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
142	-	R1116N281D5	LVR-IC	LDO, Low noise, 2.85V±1.5%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
142	ej	XC6102A533MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
142A	-	AAT60142A-S5	Vdet-IC	4.2V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
142B	-	AAT60142B-S5	Vdet-IC	4.2V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
142C	-	AAT60142C-S5	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
142D	-	AAT60142D-S5	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
143	ej	XC6102A534MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
143A	-	AAT60143A-S5	Vdet-IC	4.3V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
143B	-	AAT60143B-S5	Vdet-IC	4.3V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
143C	-	AAT60143C-S5	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
143D	-	AAT60143D-S5	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
144	ej	XC6102A535MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1441	-	HT7144-1	LVR-IC	LDO, 4.4V±3%, 30mA	SOT-23-5	28vu	VR1	6a	Htk
144A	-	AAT60144A-S5	Vdet-IC	4.4V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
144B	-	AAT60144B-S5	Vdet-IC	4.4V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
144C	-	AAT60144C-S5	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
144D	-	AAT60144D-S5	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
145	ej	XC6102A536MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
145A	-	AAT60145A-S5	Vdet-IC	4.5V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
145B	-	AAT60145B-S5	Vdet-IC	4.5V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
145C	-	AAT60145C-S5	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
145D	-	AAT60145D-S5	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
146	ej	XC6102A537MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
146A	-	AAT60146A-S5	Vdet-IC	4.6V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
146B	-	AAT60146B-S5	Vdet-IC	4.6V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
146C	-	AAT60146C-S5	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
146D	-	AAT60146D-S5	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
147	ej	XC6102A538MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
147A	-	AAT60147A-S5	Vdet-IC	4.7V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
147B	-	AAT60147B-S5	Vdet-IC	4.7V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
147C	-	AAT60147C-S5	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
147D	-	AAT60147D-S5	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD6	6g	Aat
148	ej	XC6102A539MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
148A	-	AAT60148A-S5	Vdet-IC	4.8V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
148B	-	AAT60148B-S5	Vdet-IC	4.8V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
148C	-	AAT60148C-S5	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
148D	-	AAT60148D-S5	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
149	ej	XC6102A540MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
149A	-	AAT60149A-S5	Vdet-IC	4.9V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
149B	-	AAT60149B-S5	Vdet-IC	4.9V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
149C	-	AAT60149C-S5	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
149D	-	AAT60149D-S5	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
14A	ej	XC6102A541MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14AA	-	DS1814AA	Vdet-IC	5V±5%, MR, Strobe, -Reset Output	SOT-23-5	28cp	-	6a	Dal
14AB	-	DS1814AB	Vdet-IC	5V±10%, MR, Strobe, -Reset Output	SOT-23-5	28cp	-	6a	Dal
14AC	-	DS1814AC	Vdet-IC	5V±20%, MR and Strobe, -Reset Output	SOT-23-5	28cp	-	6a	Dal
14B	ej	XC6102A542MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14BA	-	DS1814BA	Vdet-IC	5V±5%, Strobe, ±Reset Output	SOT-23-5	28xq	-	6a	Dal
14BB	-	DS1814BB	Vdet-IC	5V±10%, Strobe, ±Reset Output	SOT-23-5	28xq	-	6a	Dal
14BC	-	DS1814BC	Vdet-IC	5V±20%, Strobe, ±Reset Output	SOT-23-5	28xq	-	6a	Dal
14C	ej	XC6102A543MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14CA	-	DS1814CA	Vdet-IC	5V±5%, ±Reset PPO, MR	SOT-23-5	28xf	VD21	6a	Dal
14CB	-	DS1814CB	Vdet-IC	5V±10%, ±Reset PPO, MR	SOT-23-5	28xf	VD21	6a	Dal
14CC	-	DS1814CC	Vdet-IC	5V±20%, ±Reset PPO, MR	SOT-23-5	28xf	VD21	6a	Dal
14D	ej	XC6102A544MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14E	ej	XC6102A545MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14F	ec	XC6102A516MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14F	ej	XC6102A546MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14H	ec	XC6102A517MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14H	ej	XC6102A547MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14K	ec	XC6102A518MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14K	ej	XC6102A548MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14L	-	TK71614ASCL	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
14L	ec	XC6102A519MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14L	ej	XC6102A549MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14M	ec	XC6102A520MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14M	ej	XC6102A550MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14N	ec	XC6102A521MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14P	ec	XC6102A522MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14R	ec	XC6102A523MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14S	ec	XC6102A524MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14T	ec	XC6102A525MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14U	ec	XC6102A526MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14V	ec	XC6102A527MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14X	ec	XC6102A528MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14Y	ec	XC6102A529MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
14Z	ec	XC6102A530MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15	-	BU4SU69G2	CMOS-Log	Inverter	SSOP-5	28	Log6	6c	Rhm
15	-	R1223N302A	DC-DC-IC	PWM/VFM step-down, +CE, 3V±2%, 300kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
15	-	RN5RF15AA	LVR-IC	LRip, -CE, 1.5V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
15	-	XC62EP1502MR-G	LVR-IC	LDO, boosted, 1.5V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
15	ea	XC62ER1502MR-G	LVR-IC	LDO, boosted, 1.5V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
15-	-	XC62HR1502MR-G	LVR-IC	LDO, 1.5V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
150	ej	XC6102A631MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
1501	-	HT7150-1	LVR-IC	LDO, 5.0V±3%, 30mA	SOT-23-5	28vu	VR1	6a	Htk
150A	-	AAT60150A-S5	Vdet-IC	5.0V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
150AC	-	BL8509-150ACRN	Vdet-IC	1.5V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
150AC	-	LC9009CB5TR150AC	Vdet-IC	1.5V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
150AN	-	BL8509-150ANRN	Vdet-IC	1.5V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
150AN	-	LC9009CB5TR150AN	Vdet-IC	1.5V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
150B	-	AAT60150B-S5	Vdet-IC	5.0V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
150BC	-	BL8509-150BCRN	Vdet-IC	1.5V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
150BC	-	LC9009CB5TR150BC	Vdet-IC	1.5V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
150BN	-	BL8509-150BNRN	Vdet-IC	1.5V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
150BN	-	LC9009CB5TR150BN	Vdet-IC	1.5V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
150C	-	AAT60150C-S5	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
150CC	-	BL8509-150CCRN	Vdet-IC	1.5V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
150CC	-	LC9009CB5TR150CC	Vdet-IC	1.5V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
150CN	-	BL8509-150CNRN	Vdet-IC	1.5V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
150CN	-	LC9009CB5TR150CN	Vdet-IC	1.5V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
150D	-	AAT60150D-S5	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
150DC	-	BL8509-150DCRN	Vdet-IC	1.5V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
150DC	-	LC9009CB5TR150DC	Vdet-IC	1.5V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
150DN	-	BL8509-150DNRN	Vdet-IC	1.5V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
150DN	-	LC9009CB5TR150DN	Vdet-IC	1.5V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
150EC	-	BL8509-150ECRN	Vdet-IC	1.5V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
150EC	-	LC9009CB5TR150EC	Vdet-IC	1.5V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
150EN	-	BL8509-150ENRN	Vdet-IC	1.5V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
150EN	-	LC9009CB5TR150EN	Vdet-IC	1.5V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
150FC	-	BL8509-150FCRN	Vdet-IC	1.5V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
150FC	-	LC9009CB5TR150FC	Vdet-IC	1.5V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
150FN	-	BL8509-150FNRN	Vdet-IC	1.5V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
150FN	-	LC9009CB5TR150FN	Vdet-IC	1.5V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
150GC	-	BL8509-150GCRN	Vdet-IC	1.5V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
150GC	-	LC9009CB5TR150GC	Vdet-IC	1.5V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
150GN	-	BL8509-150GNRN	Vdet-IC	1.5V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
150GN	-	LC9009CB5TR150GN	Vdet-IC	1.5V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
151	ej	XC6102A632MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
1512	-	APL5151-285BC	LVR-IC	LDO, LN, +CE, 2.85V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
1517	-	APL5151-13BC	LVR-IC	LDO, LN, +CE, 1.3V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
1518	-	APL5151-14BC	LVR-IC	LDO, LN, +CE, 1.4V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
1519	-	APL5151-15BC	LVR-IC	LDO, LN, +CE, 1.5V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151A	-	AAT60151A-S5	Vdet-IC	5.1V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
151A	-	APL5151-16BC	LVR-IC	LDO, LN, +CE, 1.6V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151B	-	AAT60151B-S5	Vdet-IC	5.1V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
151B	-	APL5151-17BC	LVR-IC	LDO, LN, +CE, 1.7V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151C	-	AAT60151C-S5	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
151C	-	APL5151-18BC	LVR-IC	LDO, LN, +CE, 1.8V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151D	-	AAT60151D-S5	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
151D	-	APL5151-19BC	LVR-IC	LDO, LN, +CE, 1.9V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151E	-	APL5151-20BC	LVR-IC	LDO, LN, +CE, 2V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151F	-	APL5151-21BC	LVR-IC	LDO, LN, +CE, 2.1V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151G	-	APL5151-22BC	LVR-IC	LDO, LN, +CE, 2.2V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151H	-	APL5151-23BC	LVR-IC	LDO, LN, +CE, 2.3V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151I	-	APL5151-24BC	LVR-IC	LDO, LN, +CE, 2.4V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151J	-	APL5151-25BC	LVR-IC	LDO, LN, +CE, 2.5V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151K	-	APL5151-26BC	LVR-IC	LDO, LN, +CE, 2.6V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151L	-	APL5151-27BC	LVR-IC	LDO, LN, +CE, 2.7V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151M	-	APL5151-28BC	LVR-IC	LDO, LN, +CE, 2.8V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151N	-	APL5151-29BC	LVR-IC	LDO, LN, +CE, 2.9V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151O	-	APL5151-30BC	LVR-IC	LDO, LN, +CE, 3V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151P	-	APL5151-31BC	LVR-IC	LDO, LN, +CE, 3.1V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151Q	-	APL5151-32BC	LVR-IC	LDO, LN, +CE, 3.2V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151R	-	APL5151-33BC	LVR-IC	LDO, LN, +CE, 3.3V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151S	-	APL5151-34BC	LVR-IC	LDO, LN, +CE, 3.4V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151T	-	APL5151-35BC	LVR-IC	LDO, LN, +CE, 3.5V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151X	-	APL5151-48BC	LVR-IC	LDO, LN, +CE, 4.8V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151Y	-	APL5151-49BC	LVR-IC	LDO, LN, +CE, 4.9V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
151Z	-	APL5151-50BC	LVR-IC	LDO, LN, +CE, 5V±2%, 150mA	SOT-23-5	28vrx	VR7	6k	Anp
152	ej	XC6102A633MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
1522	-	APL5152-285BC	LVR-IC	LDO, LN, +CE, 2.85V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
1527	-	APL5152-13BC	LVR-IC	LDO, LN, +CE, 1.3V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1528	-	APL5152-14BC	LVR-IC	LDO, LN, +CE, 1.4V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
1529	-	APL5152-15BC	LVR-IC	LDO, LN, +CE, 1.5V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152A	-	AAT60152A-S5	Vdet-IC	5.2V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
152A	-	APL5152-16BC	LVR-IC	LDO, LN, +CE, 1.6V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152B	-	AAT60152B-S5	Vdet-IC	5.2V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
152B	-	APL5152-17BC	LVR-IC	LDO, LN, +CE, 1.7V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152C	-	AAT60152C-S5	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
152C	-	APL5152-18BC	LVR-IC	LDO, LN, +CE, 1.7V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152D	-	AAT60152D-S5	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
152D	-	APL5152-19BC	LVR-IC	LDO, LN, +CE, 1.9V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152E	-	APL5152-20BC	LVR-IC	LDO, LN, +CE, 2V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152F	-	APL5152-21BC	LVR-IC	LDO, LN, +CE, 2.1V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152G	-	APL5152-22BC	LVR-IC	LDO, LN, +CE, 2.2V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152H	-	APL5152-23BC	LVR-IC	LDO, LN, +CE, 2.3V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152I	-	APL5152-24BC	LVR-IC	LDO, LN, +CE, 2.4V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152J	-	APL5152-25BC	LVR-IC	LDO, LN, +CE, 2.5V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152K	-	APL5152-26BC	LVR-IC	LDO, LN, +CE, 2.6V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152L	-	APL5152-27BC	LVR-IC	LDO, LN, +CE, 2.7V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152M	-	APL5152-28BC	LVR-IC	LDO, LN, +CE, 2.8V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152N	-	APL5152-29BC	LVR-IC	LDO, LN, +CE, 2.9V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152O	-	APL5152-30BC	LVR-IC	LDO, LN, +CE, 3V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152P	-	APL5152-31BC	LVR-IC	LDO, LN, +CE, 3.1V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152Q	-	APL5152-32BC	LVR-IC	LDO, LN, +CE, 3.2V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152R	-	APL5152-33BC	LVR-IC	LDO, LN, +CE, 3.3V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152S	-	APL5152-34BC	LVR-IC	LDO, LN, +CE, 3.4V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152T	-	APL5152-35BC	LVR-IC	LDO, LN, +CE, 3.5V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152X	-	APL5152-48BC	LVR-IC	LDO, LN, +CE, 4.8V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152Y	-	APL5152-49BC	LVR-IC	LDO, LN, +CE, 4.9V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
152Z	-	APL5152-50BC	LVR-IC	LDO, LN, +CE, 5V±2%, 150mA	SOT-23-5	28sp	VR7	6k	Anp
153	ej	XC6102A634MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
1532	-	APL5153-285BC	LVR-IC	LDO, LN, +CE, 2.85V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
1537	-	APL5153-13BC	LVR-IC	LDO, LN, +CE, 1.3V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
1538	-	APL5153-14BC	LVR-IC	LDO, LN, +CE, 1.4V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
1539	-	APL5153-15BC	LVR-IC	LDO, LN, +CE, 1.5V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153A	-	AAT60153A-S5	Vdet-IC	5.3V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
153A	-	APL5153-16BC	LVR-IC	LDO, LN, +CE, 1.6V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153B	-	AAT60153B-S5	Vdet-IC	5.3V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
153B	-	APL5153-17BC	LVR-IC	LDO, LN, +CE, 1.7V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153C	-	AAT60153C-S5	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
153C	-	APL5153-18BC	LVR-IC	LDO, LN, +CE, 1.8V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153D	-	AAT60153D-S5	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
153D	-	APL5153-19BC	LVR-IC	LDO, LN, +CE, 1.9V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153E	-	APL5153-20BC	LVR-IC	LDO, LN, +CE, 2V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153F	-	APL5153-21BC	LVR-IC	LDO, LN, +CE, 2.1V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153G	-	APL5153-22BC	LVR-IC	LDO, LN, +CE, 2.2V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153H	-	APL5153-23BC	LVR-IC	LDO, LN, +CE, 2.3V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153I	-	APL5153-24BC	LVR-IC	LDO, LN, +CE, 2.4V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153J	-	APL5153-25BC	LVR-IC	LDO, LN, +CE, 2.5V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153K	-	APL5153-26BC	LVR-IC	LDO, LN, +CE, 2.6V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153L	-	APL5153-27BC	LVR-IC	LDO, LN, +CE, 2.7V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153M	-	APL5153-28BC	LVR-IC	LDO, LN, +CE, 2.8V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153N	-	APL5153-29BC	LVR-IC	LDO, LN, +CE, 2.9V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153O	-	APL5153-30BC	LVR-IC	LDO, LN, +CE, 3V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153P	-	APL5153-31BC	LVR-IC	LDO, LN, +CE, 3.1V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153Q	-	APL5153-32BC	LVR-IC	LDO, LN, +CE, 3.2V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153R	-	APL5153-33BC	LVR-IC	LDO, LN, +CE, 3.3V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153S	-	APL5153-34BC	LVR-IC	LDO, LN, +CE, 3.4V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153T	-	APL5153-35BC	LVR-IC	LDO, LN, +CE, 3.5V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153X	-	APL5153-48BC	LVR-IC	LDO, LN, +CE, 4.8V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153Y	-	APL5153-49BC	LVR-IC	LDO, LN, +CE, 4.9V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
153Z	-	APL5153-50BC	LVR-IC	LDO, LN, +CE, 5V±2%, 150mA	SOT-23-5	28vr1	VR7	6k	Anp
154	ej	XC6102A635MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
1542	-	APL5154-285BC	LVR-IC	LDO, LN, +CE, 2.85V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
1547	-	APL5154-13BC	LVR-IC	LDO, LN, +CE, 1.3V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
1548	-	APL5154-14BC	LVR-IC	LDO, LN, +CE, 1.4V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
1549	-	APL5154-15BC	LVR-IC	LDO, LN, +CE, 1.5V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154A	-	AAT60154A-S5	Vdet-IC	5.4V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
154A	-	APL5154-16BC	LVR-IC	LDO, LN, +CE, 1.6V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154B	-	AAT60154B-S5	Vdet-IC	5.4V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
154B	-	APL5154-17BC	LVR-IC	LDO, LN, +CE, 1.7V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
154C	-	AAT60154C-S5	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
154C	-	APL5154-18BC	LVR-IC	LDO, LN, +CE, 1.8V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154D	-	AAT60154D-S5	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
154D	-	APL5154-19BC	LVR-IC	LDO, LN, +CE, 1.9V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154E	-	APL5154-20BC	LVR-IC	LDO, LN, +CE, 2V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154F	-	APL5154-21BC	LVR-IC	LDO, LN, +CE, 2.1V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154G	-	APL5154-22BC	LVR-IC	LDO, LN, +CE, 2.2V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154H	-	APL5154-23BC	LVR-IC	LDO, LN, +CE, 2.3V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154I	-	APL5154-24BC	LVR-IC	LDO, LN, +CE, 2.4V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154J	-	APL5154-25BC	LVR-IC	LDO, LN, +CE, 2.5V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154K	-	APL5154-26BC	LVR-IC	LDO, LN, +CE, 2.6V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154L	-	APL5154-27BC	LVR-IC	LDO, LN, +CE, 2.7V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154M	-	APL5154-28BC	LVR-IC	LDO, LN, +CE, 2.8V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154N	-	APL5154-29BC	LVR-IC	LDO, LN, +CE, 2.9V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154O	-	APL5154-30BC	LVR-IC	LDO, LN, +CE, 3V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154P	-	APL5154-31BC	LVR-IC	LDO, LN, +CE, 3.1V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154Q	-	APL5154-32BC	LVR-IC	LDO, LN, +CE, 3.2V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154R	-	APL5154-33BC	LVR-IC	LDO, LN, +CE, 3.3V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154S	-	APL5154-34BC	LVR-IC	LDO, LN, +CE, 3.4V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154T	-	APL5154-35BC	LVR-IC	LDO, LN, +CE, 3.5V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154X	-	APL5154-48BC	LVR-IC	LDO, LN, +CE, 4.8V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154Y	-	APL5154-49BC	LVR-IC	LDO, LN, +CE, 4.9V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
154Z	-	APL5154-50BC	LVR-IC	LDO, LN, +CE, 5V±2%, 150mA	SOT-23-5	28un	VR7	6k	Anp
155	ej	XC6102A636MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
155A	-	AAT60155A-S5	Vdet-IC	5.5V±2%, +Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
155B	-	AAT60155B-S5	Vdet-IC	5.5V±2%, +Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
155C	-	AAT60155C-S5	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Aat
155D	-	AAT60155D-S5	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Aat
156	ej	XC6102A637MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
157	ej	XC6102A638MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
158	ej	XC6102A639MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
159	ej	XC6102A640MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15A	ej	XC6102A641MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15B	ej	XC6102A642MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15C	-	XC6201132MR	LVR-IC	1.3V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15C	ej	XC6102A643MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15D	-	XC6201142MR	LVR-IC	1.4V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15D	ej	XC6102A644MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15E	-	XC6201152MR	LVR-IC	1.5V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15E	ej	XC6102A645MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15F	-	XC6201162MR	LVR-IC	1.6V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15F	ec	XC6102A616MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15F	ej	XC6102A646MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15H	-	XC6201172MR	LVR-IC	1.7V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15H	ec	XC6102A617MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15H	ej	XC6102A647MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15K	-	TK71715S	LVR-IC	LDO, 1.5V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
15K	-	XC6201182MR	LVR-IC	1.8V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15K	ec	XC6102A618MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15K	ej	XC6102A648MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15L	-	TK71615ASCL	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
15L	-	XC6201192MR	LVR-IC	1.9V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15L	ec	XC6102A619MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15L	ej	XC6102A649MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15M	-	XC6201202MR	LVR-IC	2.0V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15M	ec	XC6102A620MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15M	ej	XC6102A650MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15N	-	XC6201212MR	LVR-IC	2.1V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15N	ec	XC6102A621MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15P	-	XC6201222MR	LVR-IC	2.2V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15P	ec	XC6102A622MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15R	-	XC6201232MR	LVR-IC	2.3V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15R	ec	XC6102A623MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15S	-	XC6201242MR	LVR-IC	2.4V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15S	ec	XC6102A624MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15T	-	TK71415S	LVR-IC	LDO, 1.5V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
15T	-	XC6201252MR	LVR-IC	2.5V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15T	ec	XC6102A625MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15U	-	XC6201262MR	LVR-IC	2.6V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15U	ec	XC6102A626MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
15V	-	XC6201272MR	LVR-IC	2.7V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15V	ec	XC6102A627MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15X	-	XC6201282MR	LVR-IC	2.8V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15X	ec	XC6102A628MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15Y	-	XC6201292MR	LVR-IC	2.9V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15Y	ec	XC6102A629MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
15Z	-	XC6201302MR	LVR-IC	3.0V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
15Z	ec	XC6102A630MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
16	-	BU4S584G2	CMOS-Log	Inverting Schmitt-trigger	SSOP-5	28	Log7	6c	Rhm
16	-	R1223N332A	DC-DC-IC	PWM/VFM step-down, +CE, 3.3V±2%, 300kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
16	-	XC62EP1602MR-G	LVR-IC	LDO, boosted, 1.6V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
16	ea	XC62ER1602MR-G	LVR-IC	LDO, boosted, 1.6V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
16-	-	XC62HR1602MR-G	LVR-IC	LDO, 1.6V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
160	-	XC6201312MR	LVR-IC	3.1V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
160	ej	XC6102B231MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
160AC	-	BL8509-160ACRN	Vdet-IC	1.6V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
160AC	-	LC9009CB5TR160AC	Vdet-IC	1.6V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
160AN	-	BL8509-160ANRN	Vdet-IC	1.6V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
160AN	-	LC9009CB5TR160AN	Vdet-IC	1.6V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
160BC	-	BL8509-160BCRN	Vdet-IC	1.6V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
160BC	-	LC9009CB5TR160BC	Vdet-IC	1.6V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
160BN	-	BL8509-160BNRN	Vdet-IC	1.6V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
160BN	-	LC9009CB5TR160BN	Vdet-IC	1.6V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
160CC	-	BL8509-160CCRN	Vdet-IC	1.6V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
160CC	-	LC9009CB5TR160CC	Vdet-IC	1.6V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
160CN	-	BL8509-160CNRN	Vdet-IC	1.6V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
160CN	-	LC9009CB5TR160CN	Vdet-IC	1.6V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
160DC	-	BL8509-160DCRN	Vdet-IC	1.6V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
160DC	-	LC9009CB5TR160DC	Vdet-IC	1.6V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
160DN	-	BL8509-160DNRN	Vdet-IC	1.6V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
160DN	-	LC9009CB5TR160DN	Vdet-IC	1.6V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
160EC	-	BL8509-160ECRN	Vdet-IC	1.6V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
160EC	-	LC9009CB5TR160EC	Vdet-IC	1.6V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
160EN	-	BL8509-160ENRN	Vdet-IC	1.6V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
160EN	-	LC9009CB5TR160EN	Vdet-IC	1.6V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
160FC	-	BL8509-160FCRN	Vdet-IC	1.6V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
160FC	-	LC9009CB5TR160FC	Vdet-IC	1.6V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
160FN	-	BL8509-160FNRN	Vdet-IC	1.6V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
160FN	-	LC9009CB5TR160FN	Vdet-IC	1.6V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
160GC	-	BL8509-160GCRN	Vdet-IC	1.6V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
160GC	-	LC9009CB5TR160GC	Vdet-IC	1.6V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
160GN	-	BL8509-160GNRN	Vdet-IC	1.6V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
160GN	-	LC9009CB5TR160GN	Vdet-IC	1.6V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
161	-	XC6201322MR	LVR-IC	3.2V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
161	ej	XC6102B232MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
162	-	XC6201332MR	LVR-IC	3.3V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
162	ej	XC6102B233MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
163	-	XC6201342MR	LVR-IC	3.4V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
163	ej	XC6102B234MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
164	-	XC6201352MR	LVR-IC	3.5V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
164	ej	XC6102B235MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1647	-	AIC1647CV	LDR-IC	1.2 MHz PWM White LED driver, OVP 4.2V	SOT-23-5	28sq	LD3	6a	Aic
1647P	-	AIC1647PV	LDR-IC	1.2 MHz PWM White LED driver, OVP 4.2V	SOT-23-5	28sq	LD3	6a	Aic
165	-	XC6201362MR	LVR-IC	3.6V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
165	ej	XC6102B236MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
166	-	XC6201372MR	LVR-IC	3.7V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
166	ej	XC6102B237MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
167	-	XC6201382MR	LVR-IC	3.8V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
167	ej	XC6102B238MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
168	-	XC6201392MR	LVR-IC	3.9V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
168	ej	XC6102B239MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
169	-	XC6201402MR	LVR-IC	4.0V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
169	ej	XC6102B240MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16A	-	XC6201412MR	LVR-IC	4.1V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16A	ej	XC6102B241MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16B	-	XC6201422MR	LVR-IC	4.2V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16B	ej	XC6102B242MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16C	-	XC6201432MR	LVR-IC	4.3V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16C	ej	XC6102B243MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16D	-	XC6201442MR	LVR-IC	4.4V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
16D	ej	XC6102B244MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16E	-	XC6201452MR	LVR-IC	4.5V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16E	ej	XC6102B245MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16F	-	XC6201462MR	LVR-IC	4.6V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16F	ec	XC6102B216MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16F	ej	XC6102B246MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16H	-	XC6201472MR	LVR-IC	4.7V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16H	ec	XC6102B217MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16H	ej	XC6102B247MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16K	-	TK71716S	LVR-IC	LDO, 1.6V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
16K	-	XC6201482MR	LVR-IC	4.8V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16K	ec	XC6102B218MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16K	ej	XC6102B248MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16L	-	TK71616ASCL	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
16L	-	XC6201492MR	LVR-IC	4.9V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16L	ec	XC6102B219MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16L	ej	XC6102B249MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16M	-	XC6201502MR	LVR-IC	5.0V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16M	ec	XC6102B220MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16M	ej	XC6102B250MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16N	-	XC6201512MR	LVR-IC	5.1V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16N	ec	XC6102B221MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16P	-	XC6201522MR	LVR-IC	5.2V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16P	ec	XC6102B222MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16R	-	XC6201532MR	LVR-IC	5.3V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16R	ec	XC6102B223MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16S	-	XC6201542MR	LVR-IC	5.4V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16S	ec	XC6102B224MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16T	-	TK71416S	LVR-IC	LDO, 1.6V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
16T	-	XC6201552MR	LVR-IC	5.5V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16T	ec	XC6102B225MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16U	-	XC6201562MR	LVR-IC	5.6V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16U	ec	XC6102B226MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16V	-	XC6201572MR	LVR-IC	5.7V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16V	ec	XC6102B227MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16X	-	XC6201582MR	LVR-IC	5.8V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16X	ec	XC6102B228MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16Y	-	XC6201592MR	LVR-IC	5.9V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16Y	ec	XC6102B229MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
16Z	-	XC6201602MR	LVR-IC	6.0V±2%, 250mA	SOT-25	28ym	VR1	6g	Tor
16Z	ec	XC6102B230MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17	-	BU4S66G2	CMOS-Log	Single-pole single-throw analog switch	SSOP-5	28	Log16	6c	Rhm
17	-	R1223N502A	DC-DC-IC	PWM/VFM step-down, +CE, 5V±2%, 300kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
17	-	XC62EP1702MR-G	LVR-IC	LDO, boosted, 1.7V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
17	ea	XC62ER1702MR-G	LVR-IC	LDO, boosted, 1.7V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
17-	-	XC62HR1702MR-G	LVR-IC	LDO, 1.7V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
170	ej	XC6102B331MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
170AC	-	BL8509-170ACRN	Vdet-IC	1.7V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
170AC	-	LC9009CB5TR170AC	Vdet-IC	1.7V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
170AN	-	BL8509-170ANRN	Vdet-IC	1.7V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
170AN	-	LC9009CB5TR170AN	Vdet-IC	1.7V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
170BC	-	BL8509-170BCRN	Vdet-IC	1.7V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
170BC	-	LC9009CB5TR170BC	Vdet-IC	1.7V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
170BN	-	BL8509-170BNRN	Vdet-IC	1.7V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
170BN	-	LC9009CB5TR170BN	Vdet-IC	1.7V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
170CC	-	BL8509-170CCRN	Vdet-IC	1.7V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
170CC	-	LC9009CB5TR170CC	Vdet-IC	1.7V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
170CN	-	BL8509-170CNRN	Vdet-IC	1.7V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
170CN	-	LC9009CB5TR170CN	Vdet-IC	1.7V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
170DC	-	BL8509-170DCRN	Vdet-IC	1.7V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
170DC	-	LC9009CB5TR170DC	Vdet-IC	1.7V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
170DN	-	BL8509-170DNRN	Vdet-IC	1.7V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
170DN	-	LC9009CB5TR170DN	Vdet-IC	1.7V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
170EC	-	BL8509-170ECRN	Vdet-IC	1.7V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
170EC	-	LC9009CB5TR170EC	Vdet-IC	1.7V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
170EN	-	BL8509-170ENRN	Vdet-IC	1.7V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
170EN	-	LC9009CB5TR170EN	Vdet-IC	1.7V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
170FC	-	BL8509-170FCRN	Vdet-IC	1.7V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
170FC	-	LC9009CB5TR170FC	Vdet-IC	1.7V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
170FN	-	BL8509-170FNRN	Vdet-IC	1.7V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
170FN	-	LC9009CB5TR170FN	Vdet-IC	1.7V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
170GC	-	BL8509-170GCRN	Vdet-IC	1.7V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
170GC	-	LC9009CB5TR170GC	Vdet-IC	1.7V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
170GN	-	BL8509-170GNRN	Vdet-IC	1.7V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
170GN	-	LC9009CB5TR170GN	Vdet-IC	1.7V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
171	ej	XC6102B332MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
172	ej	XC6102B333MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
173	ej	XC6102B334MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
174	ej	XC6102B335MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
175	ej	XC6102B336MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
176	ej	XC6102B337MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
177	ej	XC6102B338MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
178	ej	XC6102B339MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
179	ej	XC6102B340MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17A	ej	XC6102B341MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17B	ej	XC6102B342MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17C	ej	XC6102B343MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17D	ej	XC6102B344MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17E	ej	XC6102B345MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17F	ec	XC6102B316MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17F	ej	XC6102B346MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17H	ec	XC6102B317MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17H	ej	XC6102B347MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17K	-	TK71717S	LVR-IC	LDO, 1.7V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
17K	ec	XC6102B318MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17K	ej	XC6102B348MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17L	-	TK71617ASCL	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
17L	ec	XC6102B319MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17L	ej	XC6102B349MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17M	ec	XC6102B320MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17M	ej	XC6102B350MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17N	ec	XC6102B321MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17P	ec	XC6102B322MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17R	ec	XC6102B323MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17S	ec	XC6102B324MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17T	-	TK71417S	LVR-IC	LDO, 1.7V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
17T	ec	XC6102B325MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17U	ec	XC6102B326MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17V	ec	XC6102B327MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17X	ec	XC6102B328MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17Y	ec	XC6102B329MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
17Z	ec	XC6102B330MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18	-	R1223N152B	DC-DC-IC	PWM/VFM step-down, +CE, 1.5V±2%, 500kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
18	-	XC62EP1802MR-G	LVR-IC	LDO, boosted, 1.8V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
18	ea	XC62ER1802MR-G	LVR-IC	LDO, boosted, 1.8V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
18-	-	XC62HR1802MR-G	LVR-IC	LDO, 1.8V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
180	ej	XC6102B431MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
180AC	-	BL8509-180ACRN	Vdet-IC	1.8V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
180AC	-	LC9009CB5TR180AC	Vdet-IC	1.8V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
180AN	-	BL8509-180ANRN	Vdet-IC	1.8V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
180AN	-	LC9009CB5TR180AN	Vdet-IC	1.8V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
180BC	-	BL8509-180BCRN	Vdet-IC	1.8V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
180BC	-	LC9009CB5TR180BC	Vdet-IC	1.8V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
180BN	-	BL8509-180BNRN	Vdet-IC	1.8V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
180BN	-	LC9009CB5TR180BN	Vdet-IC	1.8V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
180CC	-	BL8509-180CCRN	Vdet-IC	1.8V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
180CC	-	LC9009CB5TR180CC	Vdet-IC	1.8V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
180CN	-	BL8509-180CNRN	Vdet-IC	1.8V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
180CN	-	LC9009CB5TR180CN	Vdet-IC	1.8V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
180DC	-	BL8509-180DCRN	Vdet-IC	1.8V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
180DC	-	LC9009CB5TR180DC	Vdet-IC	1.8V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
180DN	-	BL8509-180DNRN	Vdet-IC	1.8V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
180DN	-	LC9009CB5TR180DN	Vdet-IC	1.8V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
180EC	-	BL8509-180ECRN	Vdet-IC	1.8V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
180EC	-	LC9009CB5TR180EC	Vdet-IC	1.8V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
180EN	-	BL8509-180ENRN	Vdet-IC	1.8V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
180EN	-	LC9009CB5TR180EN	Vdet-IC	1.8V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
180FC	-	BL8509-180FCRN	Vdet-IC	1.8V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
180FC	-	LC9009CB5TR180FC	Vdet-IC	1.8V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
180FN	-	BL8509-180FNRN	Vdet-IC	1.8V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
180FN	-	LC9009CB5TR180FN	Vdet-IC	1.8V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
180GC	-	BL8509-180GCRN	Vdet-IC	1.8V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
180GC	-	LC9009CB5TR180GC	Vdet-IC	1.8V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
180GN	-	BL8509-180GNRN	Vdet-IC	1.8V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
180GN	-	LC9009CB5TR180GN	Vdet-IC	1.8V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
181	ej	XC6102B432MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
182	ej	XC6102B433MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1824082	-	MCP1824T-0802E/DC	LVR-IC	LDO, 0.8V±2%, 300mA, +CE	SOT-223-5A	89h1	VR4	6w	Mcc
1824122	-	MCP1824T-1202E/DC	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-223-5A	89h1	VR4	6w	Mcc
1824182	-	MCP1824T-1802E/DC	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-223-5A	89h1	VR4	6w	Mcc
1824252	-	MCP1824T-2502E/DC	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-223-5A	89h1	VR4	6w	Mcc
1824302	-	MCP1824T-3002E/DC	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-223-5A	89h1	VR4	6w	Mcc
1824332	-	MCP1824T-3302E/DC	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-223-5A	89h1	VR4	6w	Mcc
1824502	-	MCP1824T-5002E/DC	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-223-5A	89h1	VR4	6w	Mcc
1824ADJ	-	MCP1824T-ADJE/DC	LVR-IC	LDO, Adjustable, 0.8..5.0V±2%, 300mA, +CE	SOT-223-5A	89h2	VR16	6w	Mcc
1826-08	-	MCP1826T-0802E/DC	LVR-IC	LDO, 0.8V±2%, 1A, +CE	SOT-223-5A	89h1	VR4	6w	Mcc
1826-12	-	MCP1826T-1202E/DC	LVR-IC	LDO, 1.2V±2%, 1A, +CE	SOT-223-5A	89h1	VR4	6w	Mcc
1826-18	-	MCP1826T-1802E/DC	LVR-IC	LDO, 1.8V±2%, 1A, +CE	SOT-223-5A	89h1	VR4	6w	Mcc
1826-25	-	MCP1826T-2502E/DC	LVR-IC	LDO, 2.5V±2%, 1A, +CE	SOT-223-5A	89h1	VR4	6w	Mcc
1826-30	-	MCP1826T-3002E/DC	LVR-IC	LDO, 3.0V±2%, 1A, +CE	SOT-223-5A	89h1	VR4	6w	Mcc
1826-33	-	MCP1826T-3302E/DC	LVR-IC	LDO, 3.3V±2%, 1A, +CE	SOT-223-5A	89h1	VR4	6w	Mcc
1826-35	-	MCP1826T-5002E/DC	LVR-IC	LDO, 5.0V±2%, 1A, +CE	SOT-223-5A	89h1	VR4	6w	Mcc
1826-ADJ	-	MCP1826T-ADJE/DC	LVR-IC	LDO, Adjustable, 0.8..5.0V±2%, 300mA, +CE	SOT-223-5A	89h2	VR16	6w	Mcc
183	ej	XC6102B434MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
184	ej	XC6102B435MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
185	ej	XC6102B436MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
186	ej	XC6102B437MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
187	ej	XC6102B438MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
188	ej	XC6102B439MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
189	ej	XC6102B440MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18A	-	AAT60018A-S5	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
18A	ej	XC6102B441MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18-A	-	UTC8118-A	Vdet-IC	1.8V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
18AA	-	DS1819AA	Vdet-IC	3.3V±5%, MR and Strobe, -Reset Output	SOT-23-5	28cp	-	6a	Dal
18AB	-	DS1819AB	Vdet-IC	3.3V±10%, MR, Strobe, -Reset Output	SOT-23-5	28cp	-	6a	Dal
18AC	-	DS1819AC	Vdet-IC	3.3V±20%, MR, Strobe, -Reset Output	SOT-23-5	28cp	-	6a	Dal
18B	-	AAT60018B-S5	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
18B	ej	XC6102B442MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18-B	-	UTC8118-B	Vdet-IC	1.8V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
18BA	-	DS1819BA	Vdet-IC	3.3V±5%, Strobe, ±Reset Output	SOT-23-5	28xq	-	6a	Dal
18BB	-	DS1819BB	Vdet-IC	3.3V±10%, Strobe, ±Reset Output	SOT-23-5	28xq	-	6a	Dal
18BC	-	DS1819BC	Vdet-IC	3.3V±20%, Strobe, ±Reset Output	SOT-23-5	28xq	-	6a	Dal
18C	-	AAT60018C-S5	Vdet-IC	1.8V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
18C	ej	XC6102B443MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18CA	-	DS1819CA	Vdet-IC	3.3V±5%, MR, ±Reset PPO	SOT-23-5	28xf	VD21	6a	Dal
18CB	-	DS1819CB	Vdet-IC	3.3V±10%, MR, ±Reset PPO	SOT-23-5	28xf	VD21	6a	Dal
18CC	-	DS1819CC	Vdet-IC	3.3V±20%, MR, ±Reset PPO	SOT-23-5	28xf	VD21	6a	Dal
18D	-	AAT60018D-S5	Vdet-IC	1.8V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
18D	ej	XC6102B444MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18E	ej	XC6102B445MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18F	ec	XC6102B416MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18F	ej	XC6102B446MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18H	ec	XC6102B417MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18H	ej	XC6102B447MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18K	-	TK71718S	LVR-IC	LDO, 1.8V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
18K	ec	XC6102B418MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18K	ej	XC6102B448MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18L	-	TK71618ASCL	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
18L	ec	XC6102B419MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18L	ej	XC6102B449MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18M	ec	XC6102B420MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18M	ej	XC6102B450MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18N	ec	XC6102B421MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18P	ec	XC6102B422MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18R	ec	XC6102B423MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18S	ec	XC6102B424MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18T	-	TK71418S	LVR-IC	LDO, 1.8V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
18T	ec	XC6102B425MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18U	ec	XC6102B426MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18V	ec	XC6102B427MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
18X	ec	XC6102B428MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18Y	ec	XC6102B429MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
18Z	ec	XC6102B430MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19	-	R1223N182B	DC-DC-IC	PWM/VFM step-down, +CE, 1.8V±2%, 500kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
19	-	XC62EP1902MR-G	LVR-IC	LDO, boosted, 1.9V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
19	ea	XC62ER1902MR-G	LVR-IC	LDO, boosted, 1.9V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
19-	-	XC62HR1902MR-G	LVR-IC	LDO, 1.9V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
190	ej	XC6102B531MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
190AC	-	BL8509-190ACRN	Vdet-IC	1.9V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
190AC	-	LC9009CB5TR190AC	Vdet-IC	1.9V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
190AN	-	BL8509-190ANRN	Vdet-IC	1.9V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
190AN	-	LC9009CB5TR190AN	Vdet-IC	1.9V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
190BC	-	BL8509-190BCRN	Vdet-IC	1.9V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
190BC	-	LC9009CB5TR190BC	Vdet-IC	1.9V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
190BN	-	BL8509-190BNRN	Vdet-IC	1.9V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
190BN	-	LC9009CB5TR190BN	Vdet-IC	1.9V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
190CC	-	BL8509-190CCRN	Vdet-IC	1.9V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
190CC	-	LC9009CB5TR190CC	Vdet-IC	1.9V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
190CN	-	BL8509-190CNRN	Vdet-IC	1.9V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
190CN	-	LC9009CB5TR190CN	Vdet-IC	1.9V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
190DC	-	BL8509-190DCRN	Vdet-IC	1.9V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
190DC	-	LC9009CB5TR190DC	Vdet-IC	1.9V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
190DN	-	BL8509-190DNRN	Vdet-IC	1.9V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
190DN	-	LC9009CB5TR190DN	Vdet-IC	1.9V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
190EC	-	BL8509-190ECRN	Vdet-IC	1.9V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
190EC	-	LC9009CB5TR190EC	Vdet-IC	1.9V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
190EN	-	BL8509-190ENRN	Vdet-IC	1.9V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
190EN	-	LC9009CB5TR190EN	Vdet-IC	1.9V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
190FC	-	BL8509-190FCRN	Vdet-IC	1.9V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
190FC	-	LC9009CB5TR190FC	Vdet-IC	1.9V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
190FN	-	BL8509-190FNRN	Vdet-IC	1.9V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
190FN	-	LC9009CB5TR190FN	Vdet-IC	1.9V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
190GC	-	BL8509-190GCRN	Vdet-IC	1.9V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
190GC	-	LC9009CB5TR190GC	Vdet-IC	1.9V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
190GN	-	BL8509-190GNRN	Vdet-IC	1.9V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
190GN	-	LC9009CB5TR190GN	Vdet-IC	1.9V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
191	ej	XC6102B532MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
192	ej	XC6102B533MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
193	ej	XC6102B534MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
194	ej	XC6102B535MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
195	ej	XC6102B536MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
196	ej	XC6102B537MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
197	ej	XC6102B538MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
198	ej	XC6102B539MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
199	ej	XC6102B540MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19A	-	AAT60019A-S5	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
19A	ej	XC6102B541MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19-A	-	UTC8119-A	Vdet-IC	1.9V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
19B	-	AAT60019B-S5	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
19B	ej	XC6102B542MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19-B	-	UTC8119-B	Vdet-IC	1.9V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
19C	-	AAT60019C-S5	Vdet-IC	1.9V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
19C	ej	XC6102B543MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19D	-	AAT60019D-S5	Vdet-IC	1.9V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
19D	ej	XC6102B544MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19E	ej	XC6102B545MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19F	ec	XC6102B516MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19F	ej	XC6102B546MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19H	ec	XC6102B517MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19H	ej	XC6102B547MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19K	-	TK71719S	LVR-IC	LDO, 1.9V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
19K	ec	XC6102B518MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19K	ej	XC6102B548MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19L	-	TK71619ASCL	LVR-IC	LDO, 1.9V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
19L	ec	XC6102B519MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19L	ej	XC6102B549MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19M	ec	XC6102B520MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19M	ej	XC6102B550MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19N	ec	XC6102B521MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19P	ec	XC6102B522MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
19R	ec	XC6102B523MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19S	ec	XC6102B524MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19T	-	TK71419S	LVR-IC	LDO, 1.9V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
19T	ec	XC6102B525MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19U	ec	XC6102B526MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19V	ec	XC6102B527MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19X	ec	XC6102B528MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19Y	ec	XC6102B529MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
19Z	ec	XC6102B530MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1a	-	BD46E432G-M	Vdet-IC	4.3V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
1A	-	BU4341FWE	Vdet-IC	4.1V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
1A	-	BU4341G	Vdet-IC	4.1V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
1A0	-	XC2211A1100M	Op-IC	µPower, ±0.6..±5V, Icco=15µA, 550kHz, 0.5V/µs	SOT-25	28opb	OP1	6g	Tor
1A0	ej	XC6102B631MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1A1	ej	XC6102B632MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1A2	ej	XC6102B633MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1A3	ej	XC6102B634MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1A4	ej	XC6102B635MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1A5	ej	XC6102B636MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1A6	ej	XC6102B637MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1A7	-	XC6217A08AMR	LVR-IC	LDO, 0.85V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1A7	ej	XC6102B638MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1A8	-	XC6217A09AMR	LVR-IC	LDO, 0.95V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1A8	ej	XC6102B639MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1A9	-	XC6217A402MR	LVR-IC	LDO, 4.0V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1A9	ej	XC6102B640MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AA	-	XC6217A11AMR	LVR-IC	LDO, 1.15V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AA	ej	XC6102B641MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AB	-	XC6217A12AMR	LVR-IC	LDO, 1.25V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AB	ej	XC6102B642MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AC	-	XC6217A13AMR	LVR-IC	LDO, 1.35V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AC	ej	XC6102B643MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AD	-	XC6217A14AMR	LVR-IC	LDO, 1.45V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AD	ej	XC6102B644MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AE	-	XC6217A15AMR	LVR-IC	LDO, 1.55V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AE	ej	XC6102B645MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AF	-	XC6217A16AMR	LVR-IC	LDO, 1.65V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AF	ec	XC6102B616MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AF	ej	XC6102B646MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AH	-	XC6217A17AMR	LVR-IC	LDO, 1.75V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AH	ec	XC6102B617MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AH	ej	XC6102B647MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AK	-	XC6217A18AMR	LVR-IC	LDO, 1.85V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AK	ec	XC6102B618MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AK	ej	XC6102B648MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AL	-	XC6217A19AMR	LVR-IC	LDO, 1.95V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AL	ec	XC6102B619MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AL	ej	XC6102B649MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AM	-	XC6217A20AMR	LVR-IC	LDO, 2.05V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AM	ec	XC6102B620MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AM	ej	XC6102B650MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AN	-	XC6217A21AMR	LVR-IC	LDO, 2.15V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AN	ec	XC6102B621MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AP	-	XC6217A22AMR	LVR-IC	LDO, 2.25V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AP	ec	XC6102B622MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AR	-	XC6217A23AMR	LVR-IC	LDO, 2.35V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AR	ec	XC6102B623MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AS	-	XC6217A24AMR	LVR-IC	LDO, 2.45V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AS	ec	XC6102B624MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AT	-	XC6217A25AMR	LVR-IC	LDO, 2.55V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AT	ec	XC6102B625MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AU	-	XC6217A26AMR	LVR-IC	LDO, 2.65V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AU	ec	XC6102B626MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AV	-	XC6217A27AMR	LVR-IC	LDO, 2.75V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AV	ec	XC6102B627MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AX	-	XC6217A28AMR	LVR-IC	LDO, 2.85V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AX	ec	XC6102B628MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AY	-	XC6217A29AMR	LVR-IC	LDO, 2.95V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1AY	ec	XC6102B629MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1AZ	-	XC6217A30AMR	LVR-IC	LDO, 3.05V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1AZ	ec	XC6102B630MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
1b	-	BD46E442G-M	Vdet-IC	4.4V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
1B	-	BU4342FWE	Vdet-IC	4.2V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
1B	-	BU4342G	Vdet-IC	4.2V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
1B	-	R3111N111A	Vdet-IC	1.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
1B	-	RN5RL21AA	LVR-IC	2.1V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
1B	eu	RN5VD11CA	Vdet-IC	1.1V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
1B0	-	XC6217B312MR	LVR-IC	LDO, 3.1V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1B0	ej	XC6102C231MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1B1	-	XC6217B322MR	LVR-IC	LDO, 3.2V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1B1	ej	XC6102C232MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1B2	-	XC6217B332MR	LVR-IC	LDO, 3.3V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1B2	ej	XC6102C233MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1B3	-	XC6217B342MR	LVR-IC	LDO, 3.4V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1B3	ej	XC6102C234MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1B4	-	XC6217B352MR	LVR-IC	LDO, 3.5V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1B4	ej	XC6102C235MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1B5	-	TAR5SB15	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
1B5	-	XC6217B362MR	LVR-IC	LDO, 3.6V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1B5	ej	XC6102C236MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1B6	-	TAR5SB16	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
1B6	-	XC6217B372MR	LVR-IC	LDO, 3.7V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1B6	ej	XC6102C237MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1B7	-	TAR5SB17	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
1B7	-	XC6217B382MR	LVR-IC	LDO, 3.8V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1B7	ej	XC6102C238MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1B8	-	TAR5SB18	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
1B8	-	XC6217B392MR	LVR-IC	LDO, 3.9V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1B8	ej	XC6102C239MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1B9	-	TAR5SB19	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
1B9	-	XC6217B402MR	LVR-IC	LDO, 4.0V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1B9	ej	XC6102C240MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BA	ej	XC6102C241MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BB	ej	XC6102C242MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BC	ej	XC6102C243MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BD	ej	XC6102C244MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BE	ej	XC6102C245MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BF	ec	XC6102C216MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BF	ej	XC6102C246MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BH	ec	XC6102C217MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BH	ej	XC6102C247MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BK	ec	XC6102C218MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BK	ej	XC6102C248MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BL	ec	XC6102C219MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BL	ej	XC6102C249MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BM	ec	XC6102C220MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BM	ej	XC6102C250MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BN	ec	XC6102C221MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BP	ec	XC6102C222MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BR	ec	XC6102C223MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BS	ec	XC6102C224MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BT	ec	XC6102C225MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BU	ec	XC6102C226MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BV	ec	XC6102C227MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BX	ec	XC6102C228MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BY	ec	XC6102C229MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1BZ	ec	XC6102C230MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1c	-	BD46E452G-M	Vdet-IC	4.5V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
1C	-	BU4343FWE	Vdet-IC	4.3V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
1C	-	BU4343G	Vdet-IC	4.3V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
1C	-	R3111N211A	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
1C	-	RN5RL31AA	LVR-IC	3.1V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
1C	eu	RN5VD21CA	Vdet-IC	2.1V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
1C0	-	XC6224A081MR	LVR-IC	LDO, 0.8V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C0	-	XC6503D121MR-G	LVR-IC	LDO, 1.2V±20mV, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C0	ej	XC6102C331MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1C1	-	XC6224A091MR	LVR-IC	LDO, 0.9V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C1	-	XC6503D131MR-G	LVR-IC	LDO, 1.3V±20mV, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C1	ej	XC6102C332MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1C2	-	XC6224A101MR	LVR-IC	LDO, 1.0V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1C2	-	XC6503D141MR-G	LVR-IC	LDO, 1.4V±20mV, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C2	ej	XC6102C333MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1C3	-	XC6224A111MR	LVR-IC	LDO, 1.1V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C3	-	XC6503D151MR-G	LVR-IC	LDO, 1.5V±20mV, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C3	ej	XC6102C334MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1C4	-	XC6224A121MR	LVR-IC	LDO, 1.2V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C4	-	XC6503D161MR-G	LVR-IC	LDO, 1.6V±20mV, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C4	ej	XC6102C335MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1C5	-	XC6224A131MR	LVR-IC	LDO, 1.3V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C5	-	XC6503D171MR-G	LVR-IC	LDO, 1.7V±20mV, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C5	ej	XC6102C336MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1C6	-	XC6224A141MR	LVR-IC	LDO, 1.4V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C6	-	XC6503D181MR-G	LVR-IC	LDO, 1.8V±20mV, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C6	ej	XC6102C337MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1C7	-	XC6224A151MR	LVR-IC	LDO, 1.5V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C7	-	XC6503D191MR-G	LVR-IC	LDO, 1.9V±20mV, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C7	ej	XC6102C338MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1C8	-	XC6224A161MR	LVR-IC	LDO, 1.6V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C8	-	XC6503D201MR-G	LVR-IC	LDO, 2.0V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C8	ej	XC6102C339MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1C9	-	XC6224A171MR	LVR-IC	LDO, 1.7V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C9	-	XC6503D211MR-G	LVR-IC	LDO, 2.1V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1C9	ej	XC6102C340MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CA	-	XC6224A181MR	LVR-IC	LDO, 1.8V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CA	-	XC6503D221MR-G	LVR-IC	LDO, 2.2V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CA	ej	XC6102C341MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CB	-	XC6224A191MR	LVR-IC	LDO, 1.9V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CB	-	XC6503D231MR-G	LVR-IC	LDO, 2.3V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CB	ej	XC6102C342MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CC	-	XC6224A201MR	LVR-IC	LDO, 2.0V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CC	-	XC6503D241MR-G	LVR-IC	LDO, 2.4V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CC	ej	XC6102C343MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CD	-	XC6224A211MR	LVR-IC	LDO, 2.1V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CD	-	XC6503D251MR-G	LVR-IC	LDO, 2.5V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CD	ej	XC6102C344MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CE	-	XC6224A221MR	LVR-IC	LDO, 2.2V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CE	-	XC6503D261MR-G	LVR-IC	LDO, 2.6V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CE	ej	XC6102C345MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CF	-	XC6224A231MR	LVR-IC	LDO, 2.3V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CF	-	XC6503D271MR-G	LVR-IC	LDO, 2.7V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CF	ec	XC6102C316MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CF	ej	XC6102C346MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CH	-	XC6224A241MR	LVR-IC	LDO, 2.4V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CH	-	XC6503D281MR-G	LVR-IC	LDO, 2.8V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CH	ec	XC6102C317MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CH	ej	XC6102C347MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CK	-	XC6224A251MR	LVR-IC	LDO, 2.5V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CK	-	XC6503D291MR-G	LVR-IC	LDO, 2.9V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CK	ec	XC6102C318MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CK	ej	XC6102C348MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CL	-	XC6224A261MR	LVR-IC	LDO, 2.6V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CL	-	XC6503D301MR-G	LVR-IC	LDO, 3.0V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CL	ec	XC6102C319MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CL	ej	XC6102C349MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CM	-	XC6224A271MR	LVR-IC	LDO, 2.7V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CM	-	XC6503D311MR-G	LVR-IC	LDO, 3.1V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CM	ec	XC6102C320MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CM	ej	XC6102C350MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CN	-	XC6224A281MR	LVR-IC	LDO, 2.8V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CN	-	XC6503D321MR-G	LVR-IC	LDO, 3.2V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CN	ec	XC6102C321MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CP	-	XC6224A291MR	LVR-IC	LDO, 2.9V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CP	-	XC6503D331MR-G	LVR-IC	LDO, 3.3V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CP	ec	XC6102C322MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CR	-	XC6224A301MR	LVR-IC	LDO, 3.0V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CR	-	XC6503D341MR-G	LVR-IC	LDO, 3.4V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CR	ec	XC6102C323MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CS	-	XC6503D351MR-G	LVR-IC	LDO, 3.5V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CS	ec	XC6102C324MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CT	-	XC6503D361MR-G	LVR-IC	LDO, 3.6V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1CT	ec	XC6102C325MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CU	-	XC6503D371MR-G	LVR-IC	LDO, 3.7V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CU	ec	XC6102C326MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CV	-	XC6503D381MR-G	LVR-IC	LDO, 3.8V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CV	ec	XC6102C327MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CX	-	XC6503D391MR-G	LVR-IC	LDO, 3.9V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CX	ec	XC6102C328MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CY	-	XC6503D401MR-G	LVR-IC	LDO, 4.0V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CY	ec	XC6102C329MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1CZ	-	XC6503D411MR-G	LVR-IC	LDO, 4.1V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1CZ	ec	XC6102C330MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1d	-	BD46E462G-M	Vdet-IC	4.6V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
1D	-	BU4344FWE	Vdet-IC	4.4V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
1D	-	BU4344G	Vdet-IC	4.4V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
1D	-	R3111N311A	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
1D	-	RN5RL41AA	LVR-IC	4.1V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
1D	eu	RN5VD31CA	Vdet-IC	3.1V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
1D=	-	RT9818B-30GB	Vdet-IC	3.0V±1.5%, -Reset ODO, Td=55ms	SOT-23-5	28vdm	VD6	6a	Rct
1D0	-	XC6224B081MR	LVR-IC	LDO, 0.8V±20mV, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1D0	-	XC6503D421MR-G	LVR-IC	LDO, 4.2V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1D0	ej	XC6102C431MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1D1	-	S-1312A33-M5T1U3	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1D1	-	XC6224B091MR	LVR-IC	LDO, 0.9V±20mV, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1D1	-	XC6503D431MR-G	LVR-IC	LDO, 4.3V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1D1	ej	XC6102C432MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1D2	-	S-1312A34-M5T1U3	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1D2	-	XC6224B101MR	LVR-IC	LDO, 1.0V±20mV, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1D2	-	XC6503D441MR-G	LVR-IC	LDO, 4.4V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1D2	ej	XC6102C433MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1D3	-	S-1312A35-M5T1U3	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1D3	-	XC6224B111MR	LVR-IC	LDO, 1.1V±20mV, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1D3	-	XC6503D451MR-G	LVR-IC	LDO, 4.5V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1D3	ej	XC6102C434MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1D4	-	XC6224B121MR	LVR-IC	LDO, 1.2V±20mV, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1D4	-	XC6503D461MR-G	LVR-IC	LDO, 4.6V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1D4	ej	XC6102C435MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1D5	-	XC6224B131MR	LVR-IC	LDO, 1.3V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1D5	-	XC6503D471MR-G	LVR-IC	LDO, 4.7V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1D5	ej	XC6102C436MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1D6	-	XC6224B141MR	LVR-IC	LDO, 1.4V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1D6	-	XC6503D481MR-G	LVR-IC	LDO, 4.8V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1D6	ej	XC6102C437MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1D7	-	XC6224B151MR	LVR-IC	LDO, 1.5V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1D7	-	XC6503D491MR-G	LVR-IC	LDO, 4.9V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1D7	ej	XC6102C438MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1D8	-	XC6224B161MR	LVR-IC	LDO, 1.6V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1D8	-	XC6503D501MR-G	LVR-IC	LDO, 5.0V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1D8	ej	XC6102C439MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1D9	-	XC6224B171MR	LVR-IC	LDO, 1.7V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1D9	ej	XC6102C440MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DA	-	S-1312A10-M5T1U3	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DA	-	XC6224B181MR	LVR-IC	LDO, 1.8V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1DA	ej	XC6102C441MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DB	-	S-1312A11-M5T1U3	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DB	-	XC6224B191MR	LVR-IC	LDO, 1.9V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1DB	ej	XC6102C442MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DC	-	S-1312A12-M5T1U3	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DC	-	XC6224B201MR	LVR-IC	LDO, 2.0V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1DC	ej	XC6102C443MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DD	-	S-1312A13-M5T1U3	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DD	-	XC6224B211MR	LVR-IC	LDO, 2.1V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1DD	ej	XC6102C444MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DE	-	S-1312A14-M5T1U3	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DE	-	XC6224B221MR	LVR-IC	LDO, 2.2V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1DE	ej	XC6102C445MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DF	-	S-1312A15-M5T1U3	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DF	-	XC6224B231MR	LVR-IC	LDO, 2.3V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1DF	ec	XC6102C416MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DF	ej	XC6102C446MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DG	-	S-1312A16-M5T1U3	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1DH	-	S-1312A17-M5T1U3	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DH	-	XC6224B241MR	LVR-IC	LDO, 2.4V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1DH	ec	XC6102C417MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DH	ej	XC6102C447MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DJ	-	S-1312A18-M5T1U3	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DK	-	S-1312A1J-M5T1U3	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DK	-	XC6224B251MR	LVR-IC	LDO, 2.5V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1DK	ec	XC6102C418MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DK	ej	XC6102C448MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DL	-	S-1312A19-M5T1U3	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DL	-	XC6224B261MR	LVR-IC	LDO, 2.6V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1DL	ec	XC6102C419MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DL	ej	XC6102C449MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DM	-	S-1312A20-M5T1U3	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DM	-	XC6224B271MR	LVR-IC	LDO, 2.7V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1DM	ec	XC6102C420MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DM	ej	XC6102C450MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DN	-	S-1312A21-M5T1U3	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DN	-	XC6224B281MR	LVR-IC	LDO, 2.8V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1DN	ec	XC6102C421MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DO	-	S-1312A22-M5T1U3	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DP	-	S-1312A23-M5T1U3	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DP	-	XC6224B291MR	LVR-IC	LDO, 2.9V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1DP	ec	XC6102C422MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DQ	-	S-1312A24-M5T1U3	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DR	-	S-1312A25-M5T1U3	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DR	-	XC6224B301MR	LVR-IC	LDO, 3.0V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1DR	ec	XC6102C423MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DS	-	S-1312A26-M5T1U3	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DS	ec	XC6102C424MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DT	-	S-1312A27-M5T1U3	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DT	ec	XC6102C425MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DU	-	S-1312A28-M5T1U3	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DU	ec	XC6102C426MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DV	-	S-1312A2J-M5T1U3	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DV	ec	XC6102C427MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DW	-	S-1312A29-M5T1U3	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DX	-	S-1312A30-M5T1U3	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DX	ec	XC6102C428MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DY	-	S-1312A31-M5T1U3	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DY	ec	XC6102C429MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1DZ	-	S-1312A32-M5T1U3	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1DZ	ec	XC6102C430MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1e	-	BD46E472G-M	Vdet-IC	4.7V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
1E	-	BU4345FWE	Vdet-IC	4.5V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
1E	-	BU4345G	Vdet-IC	4.5V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
1E	-	R3111N411A	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
1E	-	RN5RL51AA	LVR-IC	5.1V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
1E	eu	RN5VD41CA	Vdet-IC	4.1V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
1E=	-	RT9198-15GBG	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
1E0	-	XC6217A312MR	LVR-IC	LDO, 3.1V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1E0	-	XC6503D12AMR-G	LVR-IC	LDO, 1.25V±20mV, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1E0	ej	XC6102C531MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1E1	-	S-1312B33-M5T1U3	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1E1	-	XC6217A322MR	LVR-IC	LDO, 3.2V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1E1	-	XC6503D13AMR-G	LVR-IC	LDO, 1.35V±20mV, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1E1	ej	XC6102C532MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1E2	-	S-1312B34-M5T1U3	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1E2	-	XC6217A332MR	LVR-IC	LDO, 3.3V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1E2	-	XC6503D14AMR-G	LVR-IC	LDO, 1.45V±20mV, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1E2	ej	XC6102C533MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1E3	-	S-1312B35-M5T1U3	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1E3	-	XC6217A342MR	LVR-IC	LDO, 3.4V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1E3	-	XC6503D15AMR-G	LVR-IC	LDO, 1.55V±20mV, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1E3	ej	XC6102C534MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1E4	-	XC6217A352MR	LVR-IC	LDO, 3.5V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1E4	-	XC6503D16AMR-G	LVR-IC	LDO, 1.65V±20mV, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1E4	ej	XC6102C535MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1E5	-	XC6217A362MR	LVR-IC	LDO, 3.6V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1E5	-	XC6503D17AMR-G	LVR-IC	LDO, 1.75V±20mV, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1E5	ej	XC6102C536MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1E6	-	XC6217A372MR	LVR-IC	LDO, 3.7V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1E6	-	XC6503D18AMR-G	LVR-IC	LDO, 1.85V±20mV, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1E6	ej	XC6102C537MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1E7	-	XC6217A382MR	LVR-IC	LDO, 3.8V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1E7	-	XC6503D19AMR-G	LVR-IC	LDO, 1.95V±20mV, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1E7	ej	XC6102C538MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1E8	-	XC6217A392MR	LVR-IC	LDO, 3.9V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1E8	-	XC6503D20AMR-G	LVR-IC	LDO, 2.05V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1E8	ej	XC6102C539MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1E9	-	XC6217A10AMR	LVR-IC	LDO, 1.05V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1E9	-	XC6503D21AMR-G	LVR-IC	LDO, 2.15V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1E9	ej	XC6102C540MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EA	-	S-1312B10-M5T1U3	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EA	-	XC6503D22AMR-G	LVR-IC	LDO, 2.25V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1EA	ej	XC6102C541MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EB	-	S-1312B11-M5T1U3	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EB	-	XC6503D23AMR-G	LVR-IC	LDO, 2.35V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1EB	ej	XC6102C542MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EC	-	S-1312B12-M5T1U3	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EC	-	XC6503D24AMR-G	LVR-IC	LDO, 2.45V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1EC	ej	XC6102C543MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1ED	-	S-1312B13-M5T1U3	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1ED	-	XC6503D25AMR-G	LVR-IC	LDO, 2.55V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1ED	ej	XC6102C544MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EE	-	S-1312B14-M5T1U3	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EE	-	XC6503D26AMR-G	LVR-IC	LDO, 2.65V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1EE	ej	XC6102C545MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EF	-	S-1312B15-M5T1U3	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EF	-	XC6503D27AMR-G	LVR-IC	LDO, 2.75V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1EF	ec	XC6102C516MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EF	ej	XC6102C546MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EG	-	S-1312B16-M5T1U3	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EH	-	S-1312B17-M5T1U3	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EH	-	XC6503D28AMR-G	LVR-IC	LDO, 2.85V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1EH	ec	XC6102C517MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EH	ej	XC6102C547MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EJ	-	S-1312B18-M5T1U3	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EK	-	S-1312B1J-M5T1U3	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EK	-	XC6503D29AMR-G	LVR-IC	LDO, 2.95V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1EK	ec	XC6102C518MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EK	ej	XC6102C548MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EL	-	S-1312B19-M5T1U3	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EL	-	XC6503D30AMR-G	LVR-IC	LDO, 3.05V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1EL	ec	XC6102C519MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EL	ej	XC6102C549MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EM	-	S-1312B20-M5T1U3	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EM	-	XC6503D31AMR-G	LVR-IC	LDO, 3.15V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1EM	ec	XC6102C520MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EM	ej	XC6102C550MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EN	-	S-1312B21-M5T1U3	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EN	-	XC6503D32AMR-G	LVR-IC	LDO, 3.25V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1EN	ec	XC6102C521MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EO	-	S-1312B22-M5T1U3	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EP	-	S-1312B23-M5T1U3	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EP	-	XC6503D33AMR-G	LVR-IC	LDO, 3.35V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1EP	ec	XC6102C522MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EQ	-	S-1312B24-M5T1U3	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1ER	-	S-1312B25-M5T1U3	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1ER	-	XC6503D34AMR-G	LVR-IC	LDO, 3.45V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1ER	ec	XC6102C523MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1ES	-	S-1312B26-M5T1U3	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1ES	-	XC6503D35AMR-G	LVR-IC	LDO, 3.55V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1ES	ec	XC6102C524MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1ET	-	S-1312B27-M5T1U3	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1ET	-	XC6503D36AMR-G	LVR-IC	LDO, 3.65V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1ET	ec	XC6102C525MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EU	-	S-1312B28-M5T1U3	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EU	-	XC6503D37AMR-G	LVR-IC	LDO, 3.75V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1EU	ec	XC6102C526MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1EV	-	S-1312B2J-M5T1U3	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EV	-	XC6503D38AMR-G	LVR-IC	LDO, 3.85V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1EV	ec	XC6102C527MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EW	-	S-1312B29-M5T1U3	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EX	-	S-1312B30-M5T1U3	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EX	-	XC6503D39AMR-G	LVR-IC	LDO, 3.95V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1EX	ec	XC6102C528MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EY	-	S-1312B31-M5T1U3	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EY	-	XC6503D40AMR-G	LVR-IC	LDO, 4.05V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1EY	ec	XC6102C529MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1EZ	-	S-1312B32-M5T1U3	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1EZ	-	XC6503D41AMR-G	LVR-IC	LDO, 4.15V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1EZ	ec	XC6102C530MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1f	-	BD46E482G-M	Vdet-IC	4.8V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
1F	-	BU4346FWE	Vdet-IC	4.6V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
1F	-	BU4346G	Vdet-IC	4.6V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
1F	-	R3111N511A	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
1F	eu	RN5VD51CA	Vdet-IC	5.1V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
1F0	-	XC6503D42AMR-G	LVR-IC	LDO, 4.25V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1F0	ej	XC6102C631MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1F1	-	S-1312C33-M5T1U3	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1F1	-	XC6503D43AMR-G	LVR-IC	LDO, 4.35V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1F1	ej	XC6102C632MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1F2	-	S-1312C34-M5T1U3	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1F2	-	XC6503D44AMR-G	LVR-IC	LDO, 4.45V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1F2	ej	XC6102C633MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1F3	-	S-1312C35-M5T1U3	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1F3	-	XC6503D45AMR-G	LVR-IC	LDO, 4.55V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1F3	ej	XC6102C634MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1F4	-	XC6503D46AMR-G	LVR-IC	LDO, 4.65V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1F4	ej	XC6102C635MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1F5	-	XC6503D47AMR-G	LVR-IC	LDO, 4.75V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1F5	ej	XC6102C636MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1F6	-	XC6503D48AMR-G	LVR-IC	LDO, 4.85V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1F6	ej	XC6102C637MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1F7	-	XC6217B08AMR	LVR-IC	LDO, 0.85V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1F7	-	XC6503D49AMR-G	LVR-IC	LDO, 4.95V±1%, 500mA, +CE	SOT-25	28cx	VR4	6g	Tor
1F7	ej	XC6102C638MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1F8	-	XC6217B09AMR	LVR-IC	LDO, 0.95V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1F8	ej	XC6102C639MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1F9	-	XC6217B10AMR	LVR-IC	LDO, 1.05V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1F9	ej	XC6102C640MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FA	-	S-1312C10-M5T1U3	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FA	-	XC6217B11AMR	LVR-IC	LDO, 1.15V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FA	ej	XC6102C641MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FB	-	S-1312C11-M5T1U3	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FB	-	XC6217B12AMR	LVR-IC	LDO, 1.25V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FB	ej	XC6102C642MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FC	-	S-1312C12-M5T1U3	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FC	-	XC6217B13AMR	LVR-IC	LDO, 1.35V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FC	ej	XC6102C643MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FD	-	S-1312C13-M5T1U3	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FD	-	XC6217B14AMR	LVR-IC	LDO, 1.45V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FD	ej	XC6102C644MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FE	-	S-1312C14-M5T1U3	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FE	-	XC6217B15AMR	LVR-IC	LDO, 1.55V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FE	ej	XC6102C645MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FF	-	S-1312C15-M5T1U3	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FF	-	XC6217B16AMR	LVR-IC	LDO, 1.65V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FF	ec	XC6102C616MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FF	ej	XC6102C646MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FG	-	S-1312C16-M5T1U3	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FH	-	S-1312C17-M5T1U3	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FH	-	XC6217B17AMR	LVR-IC	LDO, 1.75V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FH	ec	XC6102C617MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FH	ej	XC6102C647MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FJ	-	S-1312C18-M5T1U3	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FK	-	S-1312C1J-M5T1U3	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FK	-	XC6217B18AMR	LVR-IC	LDO, 1.85V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FK	ec	XC6102C618MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1FK	ej	XC6102C648MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FL	-	S-1312C19-M5T1U3	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FL	-	XC6217B19AMR	LVR-IC	LDO, 1.95V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FL	ec	XC6102C619MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FL	ej	XC6102C649MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FM	-	S-1312C20-M5T1U3	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FM	-	XC6217B20AMR	LVR-IC	LDO, 2.05V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FM	ec	XC6102C620MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FM	ej	XC6102C650MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FN	-	S-1312C21-M5T1U3	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FN	-	XC6217B21AMR	LVR-IC	LDO, 2.15V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FN	ec	XC6102C621MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FO	-	S-1312C22-M5T1U3	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FP	-	S-1312C23-M5T1U3	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FP	-	XC6217B22AMR	LVR-IC	LDO, 2.25V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FP	ec	XC6102C622MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FQ	-	S-1312C24-M5T1U3	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FR	-	S-1312C25-M5T1U3	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FR	-	XC6217B23AMR	LVR-IC	LDO, 2.35V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FR	ec	XC6102C623MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FS	-	S-1312C26-M5T1U3	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FS	-	XC6217B24AMR	LVR-IC	LDO, 2.45V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FS	ec	XC6102C624MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FT	-	S-1312C27-M5T1U3	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FT	-	XC6217B25AMR	LVR-IC	LDO, 2.55V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FT	ec	XC6102C625MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FU	-	S-1312C28-M5T1U3	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FU	-	XC6217B26AMR	LVR-IC	LDO, 2.65V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FU	ec	XC6102C626MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FV	-	S-1312C2J-M5T1U3	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FV	-	XC6217B27AMR	LVR-IC	LDO, 2.75V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FV	ec	XC6102C627MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FW	-	S-1312C29-M5T1U3	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FX	-	S-1312C30-M5T1U3	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FX	-	XC6217B28AMR	LVR-IC	LDO, 2.85V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FX	ec	XC6102C628MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FY	-	S-1312C31-M5T1U3	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FY	-	XC6217B29AMR	LVR-IC	LDO, 2.95V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FY	ec	XC6102C629MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1FZ	-	S-1312C32-M5T1U3	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1FZ	-	XC6217B30AMR	LVR-IC	LDO, 3.05V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1FZ	ec	XC6102C630MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
1G	-	BU4347FWE	Vdet-IC	4.7V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
1G	-	BU4347G	Vdet-IC	4.7V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
1G1	-	S-1312D33-M5T1U3	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1G2	-	S-1312D34-M5T1U3	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1G3	-	S-1312D35-M5T1U3	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GA	-	S-1312D10-M5T1U3	LVR-IC	LDO, 1.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GB	-	S-1312D11-M5T1U3	LVR-IC	LDO, 1.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GC	-	S-1312D12-M5T1U3	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GD	-	S-1312D13-M5T1U3	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GE	-	S-1312D14-M5T1U3	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GF	-	S-1312D15-M5T1U3	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GG	-	S-1312D16-M5T1U3	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GH	-	S-1312D17-M5T1U3	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GJ	-	S-1312D18-M5T1U3	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GK	-	S-1312D1J-M5T1U3	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GL	-	S-1312D19-M5T1U3	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GM	-	S-1312D20-M5T1U3	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GN	-	S-1312D21-M5T1U3	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GO	-	S-1312D22-M5T1U3	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GP	-	S-1312D23-M5T1U3	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GQ	-	S-1312D24-M5T1U3	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GR	-	S-1312D25-M5T1U3	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GS	-	S-1312D26-M5T1U3	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GT	-	S-1312D27-M5T1U3	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GU	-	S-1312D28-M5T1U3	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GV	-	S-1312D2J-M5T1U3	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GW	-	S-1312D29-M5T1U3	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GX	-	S-1312D30-M5T1U3	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1GY	-	S-1312D31-M5T1U3	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1GZ	-	S-1312D32-M5T1U3	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1H	-	BU4348FWE	Vdet-IC	4.8V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
1H	-	BU4348G	Vdet-IC	4.8V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
1H0	-	XC6224A08BMR	LVR-IC	LDO, 0.85V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1H0	ej	XC6102D331MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1H1	-	XC6224A09BMR	LVR-IC	LDO, 0.95V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1H1	ej	XC6102D332MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1H2	-	XC6224A10BMR	LVR-IC	LDO, 1.05V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1H2	ej	XC6102D333MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1H3	-	XC6224A11BMR	LVR-IC	LDO, 1.15V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1H3	ej	XC6102D334MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1H4	-	XC6224A12BMR	LVR-IC	LDO, 1.25V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1H4	ej	XC6102D335MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1H5	-	XC6224A13BMR	LVR-IC	LDO, 1.25V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1H5	ej	XC6102D336MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1H6	-	XC6224A14BMR	LVR-IC	LDO, 1.45V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1H6	ej	XC6102D337MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1H7	-	XC6224A15BMR	LVR-IC	LDO, 1.55V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1H7	ej	XC6102D338MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1H8	-	XC6224A16BMR	LVR-IC	LDO, 1.65V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1H8	ej	XC6102D339MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1H9	-	XC6224A17BMR	LVR-IC	LDO, 1.75V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1H9	ej	XC6102D340MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HA	-	XC6224A18BMR	LVR-IC	LDO, 1.85V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1HA	ej	XC6102D341MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HB	-	XC6224A19BMR	LVR-IC	LDO, 1.95V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1HB	ej	XC6102D342MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HC	-	XC6224A20BMR	LVR-IC	LDO, 2.05V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1HC	ej	XC6102D343MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HD	-	XC6224A21BMR	LVR-IC	LDO, 2.15V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1HD	ej	XC6102D344MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HE	-	XC6224A22BMR	LVR-IC	LDO, 2.25V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1HE	ej	XC6102D345MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HF	-	XC6224A23BMR	LVR-IC	LDO, 2.25V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1HF	ec	XC6102D316MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HF	ej	XC6102D346MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HH	-	XC6224A24BMR	LVR-IC	LDO, 2.45V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1HH	ec	XC6102D317MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HH	ej	XC6102D347MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HK	-	XC6224A25BMR	LVR-IC	LDO, 2.55V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1HK	ec	XC6102D318MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HK	ej	XC6102D348MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HL	-	XC6224A26BMR	LVR-IC	LDO, 2.65V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1HL	ec	XC6102D319MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HL	ej	XC6102D349MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HM	-	XC6224A27BMR	LVR-IC	LDO, 2.75V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1HM	ec	XC6102D320MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HM	ej	XC6102D350MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HN	-	XC6224A28BMR	LVR-IC	LDO, 2.85V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1HN	ec	XC6102D321MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HP	-	XC6224A29BMR	LVR-IC	LDO, 2.95V±1.5%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
1HP	ec	XC6102D322MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HR	ec	XC6102D323MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HS	ec	XC6102D324MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HT	ec	XC6102D325MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HU	ec	XC6102D326MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HV	ec	XC6102D327MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HX	ec	XC6102D328MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HY	ec	XC6102D329MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1HZ	ec	XC6102D330MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1J	-	R3111N111C	Vdet-IC	1.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
1K	-	R3111N211C	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
1K0	-	XC6224B08BMR	LVR-IC	LDO, 0.85V±20mV, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1K0	-	XC6233H121MR-G	LVR-IC	LVO, 1.2V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1K0	ej	XC6102D431MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1K1	-	XC6224B09BMR	LVR-IC	LDO, 0.95V±20mV, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1K1	-	XC6233H131MR-G	LVR-IC	LVO, 1.3V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1K1	ej	XC6102D432MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1K2	-	XC6224B10BMR	LVR-IC	LDO, 1.05V±20mV, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1K2	-	XC6233H141MR-G	LVR-IC	LVO, 1.4V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1K2	ej	XC6102D433MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1K3	-	XC6224B11BMR	LVR-IC	LDO, 1.15V±20mV, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1K3	-	XC6233H151MR-G	LVR-IC	LVO, 1.5V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1K3	ej	XC6102D434MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1K4	-	XC6224B12BMR	LVR-IC	LDO, 1.25V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1K4	-	XC6233H161MR-G	LVR-IC	LVO, 1.6V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1K4	ej	XC6102D435MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1K5	-	XC6224B13BMR	LVR-IC	LDO, 1.25V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1K5	-	XC6233H171MR-G	LVR-IC	LVO, 1.7V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1K5	ej	XC6102D436MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1K6	-	XC6224B14BMR	LVR-IC	LDO, 1.45V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1K6	-	XC6233H181MR-G	LVR-IC	LVO, 1.8V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1K6	ej	XC6102D437MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1K7	-	XC6224B15BMR	LVR-IC	LDO, 1.55V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1K7	-	XC6233H191MR-G	LVR-IC	LVO, 1.9V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1K7	ej	XC6102D438MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1K8	-	XC6224B16BMR	LVR-IC	LDO, 1.65V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1K8	-	XC6233H201MR-G	LVR-IC	LVO, 2.0V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1K8	ej	XC6102D439MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1K9	-	XC6224B17BMR	LVR-IC	LDO, 1.75V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1K9	-	XC6233H211MR-G	LVR-IC	LVO, 2.1V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1K9	ej	XC6102D440MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KA	-	XC6224B18BMR	LVR-IC	LDO, 1.85V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1KA	-	XC6233H221MR-G	LVR-IC	LVO, 2.2V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1KA	ej	XC6102D441MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KB	-	XC6224B19BMR	LVR-IC	LDO, 1.95V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1KB	-	XC6233H231MR-G	LVR-IC	LVO, 2.3V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1KB	ej	XC6102D442MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KC	-	XC6224B20BMR	LVR-IC	LDO, 2.05V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1KC	-	XC6233H241MR-G	LVR-IC	LVO, 2.4V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1KC	ej	XC6102D443MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KD	-	XC6224B21BMR	LVR-IC	LDO, 2.15V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1KD	-	XC6233H251MR-G	LVR-IC	LVO, 2.5V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1KD	ej	XC6102D444MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KE	-	XC6224B22BMR	LVR-IC	LDO, 2.25V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1KE	-	XC6233H261MR-G	LVR-IC	LVO, 2.6V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1KE	ej	XC6102D445MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KF	-	XC6224B23BMR	LVR-IC	LDO, 2.25V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1KF	-	XC6233H271MR-G	LVR-IC	LVO, 2.7V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1KF	ec	XC6102D416MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KF	ej	XC6102D446MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KH	-	XC6224B24BMR	LVR-IC	LDO, 2.45V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1KH	-	XC6233H281MR-G	LVR-IC	LVO, 2.8V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1KH	ec	XC6102D417MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KH	ej	XC6102D447MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KK	-	XC6224B25BMR	LVR-IC	LDO, 2.55V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1KK	-	XC6233H291MR-G	LVR-IC	LVO, 2.9V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1KK	ec	XC6102D418MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KK	ej	XC6102D448MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KL	-	XC6224B26BMR	LVR-IC	LDO, 2.65V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1KL	-	XC6233H301MR-G	LVR-IC	LVO, 3.0V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1KL	ec	XC6102D419MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KL	ej	XC6102D449MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KM	-	XC6224B27BMR	LVR-IC	LDO, 2.75V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1KM	-	XC6233H311MR-G	LVR-IC	LVO, 3.1V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1KM	ec	XC6102D420MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KM	ej	XC6102D450MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KN	-	XC6224B28BMR	LVR-IC	LDO, 2.85V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1KN	-	XC6233H321MR-G	LVR-IC	LVO, 3.2V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1KN	ec	XC6102D421MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KP	-	XC6224B29BMR	LVR-IC	LDO, 2.95V±1.5%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
1KP	-	XC6233H331MR-G	LVR-IC	LVO, 3.3V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1KP	ec	XC6102D422MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KR	-	XC6233H341MR-G	LVR-IC	LVO, 3.4V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1KR	ec	XC6102D423MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KS	-	XC6233H351MR-G	LVR-IC	LVO, 3.5V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1KS	ec	XC6102D424MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KT	-	XC6233H361MR-G	LVR-IC	LVO, 3.6V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1KT	ec	XC6102D425MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1KU	ec	XC6102D426MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KV	ec	XC6102D427MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KX	ec	XC6102D428MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KY	ec	XC6102D429MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1KZ	ec	XC6102D430MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1L	-	R3111N311C	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
1L0	-	XC6217A31AMR	LVR-IC	LDO, 3.15V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1L0	ej	XC6102D531MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1L1	-	S-1313A31-M5T1U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1L1	-	XC6217A32AMR	LVR-IC	LDO, 3.25V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1L1	ej	XC6102D532MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1L2	-	S-1313A32-M5T1U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1L2	-	XC6217A33AMR	LVR-IC	LDO, 3.35V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1L2	ej	XC6102D533MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1L3	-	S-1313A33-M5T1U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1L3	-	XC6217A34AMR	LVR-IC	LDO, 3.45V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1L3	ej	XC6102D534MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1L4	-	S-1313A34-M5T1U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1L4	-	XC6217A35AMR	LVR-IC	LDO, 3.55V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1L4	ej	XC6102D535MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1L5	-	S-1313A35-M5T1U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1L5	-	XC6217A36AMR	LVR-IC	LDO, 3.65V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1L5	ej	XC6102D536MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1L6	-	XC6217A37AMR	LVR-IC	LDO, 3.75V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1L6	ej	XC6102D537MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1L7	-	XC6217A38AMR	LVR-IC	LDO, 3.85V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1L7	ej	XC6102D538MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1L8	-	XC6217A39AMR	LVR-IC	LDO, 3.95V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1L8	ej	XC6102D539MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1L9	ej	XC6102D540MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LA	-	S-1313A10-M5T1U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LA	ej	XC6102D541MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LB	-	S-1313A11-M5T1U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LB	ej	XC6102D542MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LC	-	S-1313A12-M5T1U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LC	ej	XC6102D543MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LD	-	S-1313A13-M5T1U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LD	ej	XC6102D544MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LE	-	S-1313A14-M5T1U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LE	ej	XC6102D545MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LF	-	S-1313A15-M5T1U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LF	ec	XC6102D516MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LF	ej	XC6102D546MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LG	-	S-1313A16-M5T1U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LH	-	S-1313A17-M5T1U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LH	ec	XC6102D517MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LH	ej	XC6102D547MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LJ	-	S-1313A18-M5T1U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LK	-	S-1313A1J-M5T1U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LK	ec	XC6102D518MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LK	ej	XC6102D548MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LL	-	S-1313A19-M5T1U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LL	ec	XC6102D519MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LL	ej	XC6102D549MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LM	ec	XC6102D520MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LM	ej	XC6102D550MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LN	-	S-1313A20-M5T1U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LN	ec	XC6102D521MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LO	-	S-1313A21-M5T1U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LP	-	S-1313A22-M5T1U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LP	ec	XC6102D522MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LQ	-	S-1313A23-M5T1U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LR	-	S-1313A24-M5T1U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LR	ec	XC6102D523MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LS	-	S-1313A25-M5T1U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LS	ec	XC6102D524MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LT	-	S-1313A26-M5T1U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LT	ec	XC6102D525MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LU	-	S-1313A28-M5T1U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LU	ec	XC6102D526MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1LV	-	S-1313A27-M5T1U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LV	ec	XC6102D527MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LX	-	S-1313A2J-M5T1U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LX	ec	XC6102D528MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LY	-	S-1313A29-M5T1U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LY	ec	XC6102D529MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1LZ	-	S-1313A30-M5T1U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1LZ	ec	XC6102D530MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1M	-	R3111N411C	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
1M0	-	XC6217B31AMR	LVR-IC	LDO, 3.15V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1M0	-	XC6233H12BMR-G	LVR-IC	LVO, 1.25V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1M0	ej	XC6102D631MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1M1	-	XC6217B32AMR	LVR-IC	LDO, 3.25V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1M1	-	XC6233H13BMR-G	LVR-IC	LVO, 1.35V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1M1	ej	XC6102D632MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1M2	-	XC6217B33AMR	LVR-IC	LDO, 3.35V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1M2	-	XC6233H14BMR-G	LVR-IC	LVO, 1.45V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1M2	ej	XC6102D633MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1M3	-	XC6217B34AMR	LVR-IC	LDO, 3.45V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1M3	-	XC6233H15BMR-G	LVR-IC	LVO, 1.55V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1M3	ej	XC6102D634MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1M4	-	XC6217B35AMR	LVR-IC	LDO, 3.55V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1M4	-	XC6233H16BMR-G	LVR-IC	LVO, 1.65V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1M4	ej	XC6102D635MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1M5	-	XC6217B36AMR	LVR-IC	LDO, 3.65V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1M5	-	XC6233H17BMR-G	LVR-IC	LVO, 1.75V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1M5	ej	XC6102D636MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1M6	-	XC6217B37AMR	LVR-IC	LDO, 3.75V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1M6	-	XC6233H18BMR-G	LVR-IC	LVO, 1.85V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1M6	ej	XC6102D637MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1M7	-	XC6217B38AMR	LVR-IC	LDO, 3.85V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1M7	-	XC6233H19BMR-G	LVR-IC	LVO, 1.95V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1M7	ej	XC6102D638MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1M8	-	XC6217B39AMR	LVR-IC	LDO, 3.95V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1M8	-	XC6233H20BMR-G	LVR-IC	LVO, 2.05V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1M8	ej	XC6102D639MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1M9	-	XC6233H21BMR-G	LVR-IC	LVO, 2.15V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1M9	ej	XC6102D640MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MA	-	XC6233H22BMR-G	LVR-IC	LVO, 2.25V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1MA	ej	XC6102D641MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MB	-	XC6233H23BMR-G	LVR-IC	LVO, 2.35V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1MB	ej	XC6102D642MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MC	-	XC6233H24BMR-G	LVR-IC	LVO, 2.45V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1MC	ej	XC6102D643MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MD	-	XC6233H25BMR-G	LVR-IC	LVO, 2.55V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1MD	ej	XC6102D644MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1ME	-	XC6233H26BMR-G	LVR-IC	LVO, 2.65V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1ME	ej	XC6102D645MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MF	-	XC6233H27BMR-G	LVR-IC	LVO, 2.75V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1MF	ec	XC6102D616MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MF	ej	XC6102D646MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MH	-	XC6233H28BMR-G	LVR-IC	LVO, 2.85V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1MH	ec	XC6102D617MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MH	ej	XC6102D647MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MK	-	XC6233H29BMR-G	LVR-IC	LVO, 2.95V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1MK	ec	XC6102D618MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MK	ej	XC6102D648MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1ML	-	XC6233H30BMR-G	LVR-IC	LVO, 3.05V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1ML	ec	XC6102D619MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1ML	ej	XC6102D649MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MM	-	XC6233H31BMR-G	LVR-IC	LVO, 3.15V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1MM	ec	XC6102D620MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MM	ej	XC6102D650MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MN	-	XC6233H32BMR-G	LVR-IC	LVO, 3.25V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1MN	ec	XC6102D621MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MP	-	XC6233H33BMR-G	LVR-IC	LVO, 3.35V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1MP	ec	XC6102D622MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MR	-	XC6233H34BMR-G	LVR-IC	LVO, 3.45V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
1MR	ec	XC6102D623MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MS	-	XC6233H35BMR-G	LVR-IC	LVO, 3.55V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1MS	ec	XC6102D624MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MT	ec	XC6102D625MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MU	ec	XC6102D626MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MV	ec	XC6102D627MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MX	ec	XC6102D628MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MY	ec	XC6102D629MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1MZ	ec	XC6102D630MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
1N	-	R3111N511C	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
1N1	-	S-1313B31-M5T1U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1N2	-	S-1313B32-M5T1U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1N3	-	S-1313B33-M5T1U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1N4	-	S-1313B34-M5T1U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1N5	-	S-1313B35-M5T1U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NA	-	S-1313B10-M5T1U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NB	-	S-1313B11-M5T1U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NC	-	S-1313B12-M5T1U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1ND	-	S-1313B13-M5T1U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NE	-	S-1313B14-M5T1U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NF	-	S-1313B15-M5T1U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NG	-	S-1313B16-M5T1U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NH	-	S-1313B17-M5T1U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NJ	-	S-1313B18-M5T1U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NK	-	S-1313B1J-M5T1U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NL	-	S-1313B19-M5T1U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NN	-	S-1313B20-M5T1U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NO	-	S-1313B21-M5T1U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NP	-	S-1313B22-M5T1U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NQ	-	S-1313B23-M5T1U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NR	-	S-1313B24-M5T1U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NS	-	S-1313B25-M5T1U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NT	-	S-1313B26-M5T1U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NU	-	S-1313B27-M5T1U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NV	-	S-1313B28-M5T1U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NX	-	S-1313B2J-M5T1U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NY	-	S-1313B29-M5T1U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1NZ	-	S-1313B30-M5T1U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1O1	-	S-1313C31-M5T1U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1O2	-	S-1313C32-M5T1U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1O3	-	S-1313C33-M5T1U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1O4	-	S-1313C34-M5T1U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1O5	-	S-1313C35-M5T1U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OA	-	S-1313C10-M5T1U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OB	-	S-1313C11-M5T1U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OC	-	S-1313C12-M5T1U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OD	-	S-1313C13-M5T1U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OE	-	S-1313C14-M5T1U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OF	-	S-1313C15-M5T1U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OG	-	S-1313C16-M5T1U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OH	-	S-1313C17-M5T1U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OJ	-	S-1313C18-M5T1U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OK	-	S-1313C1J-M5T1U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OL	-	S-1313C19-M5T1U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1ON	-	S-1313C20-M5T1U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OO	-	S-1313C21-M5T1U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OP	-	S-1313C22-M5T1U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OQ	-	S-1313C23-M5T1U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OR	-	S-1313C24-M5T1U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OS	-	S-1313C25-M5T1U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OT	-	S-1313C26-M5T1U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OU	-	S-1313C27-M5T1U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OV	-	S-1313C28-M5T1U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OX	-	S-1313C2J-M5T1U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OY	-	S-1313C29-M5T1U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1OZ	-	S-1313C30-M5T1U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1P0	ej	XC6102E431MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1P1	-	S-1313D31-M5T1U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1P1	ej	XC6102E432MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1P2	-	S-1313D32-M5T1U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1P2	ej	XC6102E433MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1P3	-	S-1313D33-M5T1U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1P3	ej	XC6102E434MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1P4	-	S-1313D34-M5T1U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1P4	ej	XC6102E435MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1P5	-	S-1313D35-M5T1U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1P5	ej	XC6102E436MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1P6	ej	XC6102E437MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1P7	ej	XC6102E438MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1P8	ej	XC6102E439MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1P9	ej	XC6102E440MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PA	-	S-1313D10-M5T1U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PA	ej	XC6102E441MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PB	-	S-1313D11-M5T1U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PB	ej	XC6102E442MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PC	-	S-1313D12-M5T1U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PC	ej	XC6102E443MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PD	-	S-1313D13-M5T1U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PD	ej	XC6102E444MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PE	-	S-1313D14-M5T1U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PE	ej	XC6102E445MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PF	-	S-1313D15-M5T1U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PF	ec	XC6102E416MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PF	ej	XC6102E446MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PG	-	S-1313D16-M5T1U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PH	-	S-1313D17-M5T1U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PH	ec	XC6102E417MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PH	ej	XC6102E447MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PJ	-	S-1313D18-M5T1U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PK	-	S-1313D1J-M5T1U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PK	ec	XC6102E418MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PK	ej	XC6102E448MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PL	-	S-1313D19-M5T1U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PL	ec	XC6102E419MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PL	ej	XC6102E449MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PM	ec	XC6102E420MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PM	ej	XC6102E450MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PN	-	S-1313D20-M5T1U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PN	ec	XC6102E421MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PO	-	S-1313D21-M5T1U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PP	-	S-1313D22-M5T1U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PP	ec	XC6102E422MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PQ	-	S-1313D23-M5T1U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PR	-	S-1313D24-M5T1U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PR	ec	XC6102E423MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PS	-	S-1313D25-M5T1U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PS	ec	XC6102E424MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PT	-	S-1313D26-M5T1U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PT	ec	XC6102E425MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PU	-	S-1313D27-M5T1U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PU	ec	XC6102E426MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PV	-	S-1313D28-M5T1U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PV	ec	XC6102E427MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PX	-	S-1313D2J-M5T1U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PX	ec	XC6102E428MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PY	-	S-1313D29-M5T1U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PY	ec	XC6102E429MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1PZ	-	S-1313D30-M5T1U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1PZ	ec	XC6102E430MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1R	-	R1210N311A	DC-DC-IC	PWM step-up, 3.1V, 35..100kHz	SOT-23-5	28sc	DC3	6g	Ric
1R0	ej	XC6102E531MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1R1	ej	XC6102E532MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1R2	ej	XC6102E533MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1R3	ej	XC6102E534MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1R4	ej	XC6102E535MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1R5	ej	XC6102E536MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1R6	ej	XC6102E537MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1R7	ej	XC6102E538MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1R8	ej	XC6102E539MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1R9	ej	XC6102E540MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RA	ej	XC6102E541MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RB	ej	XC6102E542MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1RC	ej	XC6102E543MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RD	ej	XC6102E544MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RE	ej	XC6102E545MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RF	ec	XC6102E516MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RF	ej	XC6102E546MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RH	ec	XC6102E517MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RH	ej	XC6102E547MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RK	ec	XC6102E518MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RK	ej	XC6102E548MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RL	ec	XC6102E519MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RL	ej	XC6102E549MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RM	ec	XC6102E520MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RM	ej	XC6102E550MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RN	ec	XC6102E521MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RP	ec	XC6102E522MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RR	ec	XC6102E523MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RS	ec	XC6102E524MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RT	ec	XC6102E525MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RU	ec	XC6102E526MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RV	ec	XC6102E527MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RX	ec	XC6102E528MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RY	ec	XC6102E529MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1RZ	ec	XC6102E530MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1S0	ej	XC6102E631MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1S1	ej	XC6102E632MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1S2	ej	XC6102E633MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1S3	ej	XC6102E634MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1S4	ej	XC6102E635MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1S5	ej	XC6102E636MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1S6	ej	XC6102E637MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1S7	ej	XC6102E638MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1S8	ej	XC6102E639MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1S9	ej	XC6102E640MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SA	ej	XC6102E641MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SB	ej	XC6102E642MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SC	ej	XC6102E643MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SD	ej	XC6102E644MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SE	ej	XC6102E645MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SF	ec	XC6102E616MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SF	ej	XC6102E646MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SH	ec	XC6102E617MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SH	ej	XC6102E647MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SK	ec	XC6102E618MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SK	ej	XC6102E648MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SL	ec	XC6102E619MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SL	ej	XC6102E649MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SM	ec	XC6102E620MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SM	ej	XC6102E650MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SN	ec	XC6102E621MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SP	ec	XC6102E622MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SR	ec	XC6102E623MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SS	ec	XC6102E624MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1ST	ec	XC6102E625MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SU	ec	XC6102E626MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SV	ec	XC6102E627MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SX	ec	XC6102E628MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SY	ec	XC6102E629MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1SZ	ec	XC6102E630MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
1T0	ej	XC6102F531MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1T1	-	S-1333A31-M5T1U3	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1T1	ej	XC6102F532MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1T2	-	S-1333A32-M5T1U3	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1T2	ej	XC6102F533MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1T3	-	S-1333A33-M5T1U3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1T3	ej	XC6102F534MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1T4	-	S-1333A34-M5T1U3	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1T4	ej	XC6102F535MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1T5	-	S-1333A35-M5T1U3	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1T5	ej	XC6102F536MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1T6	ej	XC6102F537MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1T7	ej	XC6102F538MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1T8	ej	XC6102F539MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1T9	ej	XC6102F540MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TA	-	S-1333A10-M5T1U3	LVR-IC	LDO, 1.0V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1TA	ej	XC6102F541MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TB	-	S-1333A11-M5T1U3	LVR-IC	LDO, 1.1V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TB	ej	XC6102F542MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TC	-	S-1333A12-M5T1U3	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TC	ej	XC6102F543MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TD	-	S-1333A13-M5T1U3	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TD	ej	XC6102F544MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TE	-	S-1333A14-M5T1U3	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TE	ej	XC6102F545MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TF	-	S-1333A15-M5T1U3	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TF	ec	XC6102F516MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TF	ej	XC6102F546MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TG	-	S-1333A16-M5T1U3	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TH	-	S-1333A17-M5T1U3	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TH	ec	XC6102F517MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TH	ej	XC6102F547MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TJ	-	S-1333A18-M5T1U3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TK	-	S-1333A1J-M5T1U3	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TK	ec	XC6102F518MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TK	ej	XC6102F548MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TL	-	S-1333A19-M5T1U3	LVR-IC	LDO, 1.9V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TL	ec	XC6102F519MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TL	ej	XC6102F549MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TM	ec	XC6102F520MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TM	ej	XC6102F550MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TN	-	S-1333A20-M5T1U3	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TN	ec	XC6102F521MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TO	-	S-1333A21-M5T1U3	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TP	-	S-1333A22-M5T1U3	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TP	ec	XC6102F522MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TQ	-	S-1333A23-M5T1U3	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TR	-	S-1333A24-M5T1U3	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TR	ec	XC6102F523MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TS	-	S-1333A25-M5T1U3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TS	ec	XC6102F524MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TT	-	S-1333A26-M5T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TT	ec	XC6102F525MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TU	-	S-1333A28-M5T1U3	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TU	ec	XC6102F526MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TV	-	S-1333A27-M5T1U3	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TV	ec	XC6102F527MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TX	-	S-1333A2J-M5T1U3	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TX	ec	XC6102F528MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TY	-	S-1333A29-M5T1U3	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TY	ec	XC6102F529MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1TZ	-	S-1333A30-M5T1U3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
1TZ	ec	XC6102F530MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1U0	ej	XC6102F631MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1U1	-	S-1333B31-M5T1U3	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1U1	ej	XC6102F632MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1U2	-	S-1333B32-M5T1U3	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1U2	ej	XC6102F633MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1U3	-	S-1333B33-M5T1U3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1U3	ej	XC6102F634MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1U4	-	S-1333B34-M5T1U3	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1U4	ej	XC6102F635MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1U5	-	S-1333B35-M5T1U3	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1U5	ej	XC6102F636MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1U6	ej	XC6102F637MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1U7	ej	XC6102F638MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1U8	ej	XC6102F639MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1U9	ej	XC6102F640MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UA	-	S-1333B10-M5T1U3	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UA	ej	XC6102F641MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UB	-	S-1333B11-M5T1U3	LVR-IC	LDO, 1.1V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UB	ej	XC6102F642MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1UC	-	S-1333B12-M5T1U3	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UC	ej	XC6102F643MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UD	-	S-1333B13-M5T1U3	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UD	ej	XC6102F644MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UE	-	S-1333B14-M5T1U3	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UE	ej	XC6102F645MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UF	-	S-1333B15-M5T1U3	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UF	ec	XC6102F616MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UF	ej	XC6102F646MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UG	-	S-1333B16-M5T1U3	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UH	-	S-1333B17-M5T1U3	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UH	ec	XC6102F617MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UH	ej	XC6102F647MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UJ	-	S-1333B18-M5T1U3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UK	-	S-1333B1J-M5T1U3	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UK	ec	XC6102F618MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UK	ej	XC6102F648MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UL	-	S-1333B19-M5T1U3	LVR-IC	LDO, 1.9V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UL	ec	XC6102F619MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UL	ej	XC6102F649MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UM	ec	XC6102F620MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UM	ej	XC6102F650MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UN	-	S-1333B20-M5T1U3	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UN	ec	XC6102F621MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UO	-	S-1333B21-M5T1U3	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UP	-	S-1333B22-M5T1U3	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UP	ec	XC6102F622MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UQ	-	S-1333B23-M5T1U3	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UR	-	S-1333B24-M5T1U3	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UR	ec	XC6102F623MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1US	-	S-1333B25-M5T1U3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1US	ec	XC6102F624MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UT	-	S-1333B26-M5T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UT	ec	XC6102F625MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UU	-	S-1333B27-M5T1U3	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UU	ec	XC6102F626MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UV	-	S-1333B28-M5T1U3	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UV	ec	XC6102F627MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UX	-	S-1333B2J-M5T1U3	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UX	ec	XC6102F628MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UY	-	S-1333B29-M5T1U3	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UY	ec	XC6102F629MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1UZ	-	S-1333B30-M5T1U3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
1UZ	ec	XC6102F630MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
1V0	ej	XC6102H631MR	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1V1	-	S-1333C31-M5T1U3	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1V1	ej	XC6102H632MR	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1V2	-	S-1333C32-M5T1U3	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1V2	ej	XC6102H633MR	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1V3	-	S-1333C33-M5T1U3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1V3	ej	XC6102H634MR	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1V4	-	S-1333C34-M5T1U3	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1V4	ej	XC6102H635MR	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1V5	-	S-1333C35-M5T1U3	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1V5	-	TAR5S15	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
1V5	-	TAR5S15U	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
1V5	ej	XC6102H636MR	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1V6	-	TAR5S16	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
1V6	-	TAR5S16U	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
1V6	ej	XC6102H637MR	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1V7	-	TAR5S17	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
1V7	-	TAR5S17U	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
1V7	-	XC6217A082MR	LVR-IC	LDO, 0.8V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1V7	ej	XC6102H638MR	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1V8	-	TAR5S18	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
1V8	-	TAR5S18U	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
1V8	-	XC6217A092MR	LVR-IC	LDO, 0.9V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1V8	ej	XC6102H639MR	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1V9	-	TAR5S19	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
1V9	-	TAR5S19U	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1V9	-	XC6217A102MR	LVR-IC	LDO, 1.0V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1V9	ej	XC6102H640MR	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VA	-	S-1333C10-M5T1U3	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VA	-	XC6217A112MR	LVR-IC	LDO, 1.1V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VA	ej	XC6102H641MR	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VB	-	S-1333C11-M5T1U3	LVR-IC	LDO, 1.1V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VB	-	XC6217A122MR	LVR-IC	LDO, 1.2V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VB	ej	XC6102H642MR	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VC	-	S-1333C12-M5T1U3	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VC	-	XC6217A132MR	LVR-IC	LDO, 1.3V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VC	ej	XC6102H643MR	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VD	-	S-1333C13-M5T1U3	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VD	-	XC6217A142MR	LVR-IC	LDO, 1.4V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VD	ej	XC6102H644MR	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VE	-	S-1333C14-M5T1U3	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VE	-	XC6217A152MR	LVR-IC	LDO, 1.5V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VE	ej	XC6102H645MR	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VF	-	S-1333C15-M5T1U3	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VF	-	XC6217A162MR	LVR-IC	LDO, 1.6V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VF	ec	XC6102H616MR	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VF	ej	XC6102H646MR	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VG	-	S-1333C16-M5T1U3	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VH	-	S-1333C17-M5T1U3	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VH	-	XC6217A172MR	LVR-IC	LDO, 1.7V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VH	ec	XC6102H617MR	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VH	ej	XC6102H647MR	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VJ	-	S-1333C18-M5T1U3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VK	-	S-1333C1J-M5T1U3	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VK	-	XC6217A182MR	LVR-IC	LDO, 1.8V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VK	ec	XC6102H618MR	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VK	ej	XC6102H648MR	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VL	-	S-1333C19-M5T1U3	LVR-IC	LDO, 1.9V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VL	-	XC6217A192MR	LVR-IC	LDO, 1.9V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VL	ec	XC6102H619MR	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VL	ej	XC6102H649MR	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VM	-	XC6217A202MR	LVR-IC	LDO, 2.0V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VM	ec	XC6102H620MR	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VM	ej	XC6102H650MR	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VN	-	S-1333C20-M5T1U3	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VN	-	XC6217A212MR	LVR-IC	LDO, 2.1V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VN	ec	XC6102H621MR	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VO	-	S-1333C21-M5T1U3	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VP	-	S-1333C22-M5T1U3	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VP	-	XC6217A222MR	LVR-IC	LDO, 2.2V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VP	ec	XC6102H622MR	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VQ	-	S-1333C23-M5T1U3	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VR	-	S-1333C24-M5T1U3	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VR	-	XC6217A232MR	LVR-IC	LDO, 2.3V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VR	ec	XC6102H623MR	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VS	-	S-1333C25-M5T1U3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VS	-	XC6217A242MR	LVR-IC	LDO, 2.4V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VS	ec	XC6102H624MR	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VT	-	S-1333C26-M5T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VT	-	XC6217A252MR	LVR-IC	LDO, 2.5V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VT	ec	XC6102H625MR	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VU	-	S-1333C27-M5T1U3	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VU	-	XC6217A262MR	LVR-IC	LDO, 2.6V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VU	ec	XC6102H626MR	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VV	-	S-1333C28-M5T1U3	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VV	-	XC6217A272MR	LVR-IC	LDO, 2.7V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VV	ec	XC6102H627MR	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VX	-	S-1333C2J-M5T1U3	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VX	-	XC6217A282MR	LVR-IC	LDO, 2.8V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VX	ec	XC6102H628MR	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VY	-	S-1333C29-M5T1U3	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VY	-	XC6217A292MR	LVR-IC	LDO, 2.9V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VY	ec	XC6102H629MR	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
1VZ	-	S-1333C30-M5T1U3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
1VZ	-	XC6217A302MR	LVR-IC	LDO, 3.0V±2%, 200mA, +CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1VZ	ec	XC6102H630MR	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1W	-	R1210N311C	DC-DC-IC	PWM step-up, 3.1V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
1X	-	R1210N411C	DC-DC-IC	PWM step-up, 4.1V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
1X1	-	S-1333D31-M5T1U3	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1X2	-	S-1333D32-M5T1U3	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1X3	-	S-1333D33-M5T1U3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1X7	-	XC6217B082MR	LVR-IC	LDO, 0.8V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1X8	-	XC6217B092MR	LVR-IC	LDO, 0.9V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1X9	-	XC6217B102MR	LVR-IC	LDO, 1.0V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XA	-	S-1333D10-M5T1U3	LVR-IC	LDO, 1.0V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XA	-	XC6217B112MR	LVR-IC	LDO, 1.1V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XB	-	S-1333D11-M5T1U3	LVR-IC	LDO, 1.1V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XB	-	XC6217B122MR	LVR-IC	LDO, 1.2V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XC	-	S-1333D12-M5T1U3	LVR-IC	LDO, 1.2V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XC	-	XC6217B132MR	LVR-IC	LDO, 1.3V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XD	-	S-1333D13-M5T1U3	LVR-IC	LDO, 1.3V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XD	-	XC6217B142MR	LVR-IC	LDO, 1.4V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XE	-	S-1333D14-M5T1U3	LVR-IC	LDO, 1.4V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XE	-	XC6217B152MR	LVR-IC	LDO, 1.5V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XF	-	S-1333D15-M5T1U3	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XF	-	XC6217B162MR	LVR-IC	LDO, 1.6V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XG	-	S-1333D16-M5T1U3	LVR-IC	LDO, 1.6V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XH	-	S-1333D17-M5T1U3	LVR-IC	LDO, 1.7V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XH	-	XC6217B172MR	LVR-IC	LDO, 1.7V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XJ	-	S-1333D18-M5T1U3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XK	-	S-1333D1J-M5T1U3	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XK	-	XC6217B182MR	LVR-IC	LDO, 1.8V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XL	-	S-1333D19-M5T1U3	LVR-IC	LDO, 1.9V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XL	-	XC6217B192MR	LVR-IC	LDO, 1.9V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XM	-	XC6217B202MR	LVR-IC	LDO, 2.0V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XN	-	S-1333D20-M5T1U3	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XN	-	XC6217B212MR	LVR-IC	LDO, 2.1V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XO	-	S-1333D21-M5T1U3	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XP	-	S-1333D22-M5T1U3	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XP	-	XC6217B222MR	LVR-IC	LDO, 2.2V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XQ	-	S-1333D23-M5T1U3	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XR	-	S-1333D24-M5T1U3	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XR	-	XC6217B232MR	LVR-IC	LDO, 2.3V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XS	-	S-1333D25-M5T1U3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XS	-	XC6217B242MR	LVR-IC	LDO, 2.4V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XT	-	S-1333D26-M5T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XT	-	XC6217B252MR	LVR-IC	LDO, 2.5V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XU	-	S-1333D27-M5T1U3	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XU	-	XC6217B262MR	LVR-IC	LDO, 2.6V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XV	-	S-1333D28-M5T1U3	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XV	-	XC6217B272MR	LVR-IC	LDO, 2.7V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XX	-	S-1333D2J-M5T1U3	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XX	-	XC6217B282MR	LVR-IC	LDO, 2.8V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XY	-	S-1333D29-M5T1U3	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XY	-	XC6217B292MR	LVR-IC	LDO, 2.9V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1XZ	-	S-1333D30-M5T1U3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
1XZ	-	XC6217B302MR	LVR-IC	LDO, 3.0V±2%, 200mA, +CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
1Y	-	R1210N511C	DC-DC-IC	PWM step-up, 5.1V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
20	-	R1223N252B	DC-DC-IC	PWM/VFM step-down, +CE, 2.5V±2%, 500kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
20	-	RN5RF20AA	LVR-IC	LRip, -CE, 2V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
20	-	RN5RZ20AA	LVR-IC	LDO, LN, 2V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
20	-	XC62EP2002MR-G	LVR-IC	LDO, boosted, 2.0V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
20	ea	XC62ER2002MR-G	LVR-IC	LDO, boosted, 2.0V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
20-	-	XC62HR2002MR-G	LVR-IC	LDO, 2.0V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
200	ej	XC6103A131MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
200AC	-	BL8509-200ACRN	Vdet-IC	2.0V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
200AC	-	LC9009CB5TR200AC	Vdet-IC	2.0V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
200AN	-	BL8509-200ANRN	Vdet-IC	2.0V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
200AN	-	LC9009CB5TR200AN	Vdet-IC	2.0V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
200BC	-	BL8509-200BCRN	Vdet-IC	2.0V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
200BC	-	LC9009CB5TR200BC	Vdet-IC	2.0V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
200BN	-	BL8509-200BNRN	Vdet-IC	2.0V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
200BN	-	LC9009CB5TR200BN	Vdet-IC	2.0V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
200CC	-	BL8509-200CCRN	Vdet-IC	2.0V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
200CC	-	LC9009CB5TR200CC	Vdet-IC	2.0V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
200CN	-	BL8509-200CNRN	Vdet-IC	2.0V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
200CN	-	LC9009CB5TR200CN	Vdet-IC	2.0V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
200DC	-	BL8509-200DCRN	Vdet-IC	2.0V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
200DC	-	LC9009CB5TR200DC	Vdet-IC	2.0V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
200DN	-	BL8509-200DNRN	Vdet-IC	2.0V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
200DN	-	LC9009CB5TR200DN	Vdet-IC	2.0V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
200EC	-	BL8509-200ECRN	Vdet-IC	2.0V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
200EC	-	LC9009CB5TR200EC	Vdet-IC	2.0V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
200EN	-	BL8509-200ENRN	Vdet-IC	2.0V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
200EN	-	LC9009CB5TR200EN	Vdet-IC	2.0V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
200FC	-	BL8509-200FCRN	Vdet-IC	2.0V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
200FC	-	LC9009CB5TR200FC	Vdet-IC	2.0V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
200FN	-	BL8509-200FNRN	Vdet-IC	2.0V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
200FN	-	LC9009CB5TR200FN	Vdet-IC	2.0V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
200GC	-	BL8509-200GCRN	Vdet-IC	2.0V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
200GC	-	LC9009CB5TR200GC	Vdet-IC	2.0V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
200GN	-	BL8509-200GNRN	Vdet-IC	2.0V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
200GN	-	LC9009CB5TR200GN	Vdet-IC	2.0V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
201	ej	XC6103A132MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
202	ej	XC6103A133MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
203	ej	XC6103A134MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
204	ej	XC6103A135MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
205	ej	XC6103A136MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
206	ej	XC6103A137MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
207	ej	XC6103A138MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
208	ej	XC6103A139MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
209	-	R3112N091A	Vdet-IC	0.91V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
209	ej	XC6103A140MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20A	-	AAT60020A-S5	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
20A	ej	XC6103A141MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20-A	-	UTC8120-A	Vdet-IC	2.0V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
20B	-	AAT60020B-S5	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
20B	ej	XC6103A142MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20-B	-	UTC8120-B	Vdet-IC	2.0V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
20C	-	AAT60020C-S5	Vdet-IC	2.0V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
20C	ej	XC6103A143MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20D	-	AAT60020D-S5	Vdet-IC	2.0V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
20D	ej	XC6103A144MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20E	ej	XC6103A145MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20F	ec	XC6103A116MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20F	ej	XC6103A146MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20H	ec	XC6103A117MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20H	ej	XC6103A147MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20K	-	TK71720S	LVR-IC	LDO, 2.0V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
20K	ec	XC6103A118MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20K	ej	XC6103A148MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20L	-	TK71620ASCL	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
20L	ec	XC6103A119MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20L	ej	XC6103A149MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20M	-	XC6216B202MR	LVR-IC	2.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
20M	ec	XC6103A120MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20M	ej	XC6103A150MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20N	-	XC6216B212MR	LVR-IC	2.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
20N	ec	XC6103A121MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20P	-	XC6216B222MR	LVR-IC	2.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
20P	ec	XC6103A122MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20R	-	XC6216B232MR	LVR-IC	2.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
20R	ec	XC6103A123MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20S	-	XC6216B242MR	LVR-IC	2.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
20S	ec	XC6103A124MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20T	-	TK71420S	LVR-IC	LDO, 2.0V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
20T	-	XC6216B252MR	LVR-IC	2.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
20T	ec	XC6103A125MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20U	-	XC6216B262MR	LVR-IC	2.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
20U	ec	XC6103A126MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20V	-	XC6216B272MR	LVR-IC	2.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
20V	ec	XC6103A127MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20X	-	XC6216B282MR	LVR-IC	2.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
20X	ec	XC6103A128MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
20Y	-	XC6216B292MR	LVR-IC	2.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
20Y	ec	XC6103A129MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
20Z	-	XC6216B302MR	LVR-IC	3.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
20Z	ec	XC6103A130MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21	-	R1223N302B	DC-DC-IC	PWM/VFM step-down, +CE, 3V±2%, 500kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
21	-	RN5RF21AA	LVR-IC	LRip, -CE, 2.1V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
21	-	RN5RZ21AA	LVR-IC	LDO, LN, 2.1V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
21	-	XC62EP2102MR-G	LVR-IC	LDO, boosted, 2.1V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
21	ea	XC62ER2102MR-G	LVR-IC	LDO, boosted, 2.1V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
21-	-	XC62HR2102MR-G	LVR-IC	LDO, 2.1V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
210	-	R3112N101A	Vdet-IC	1.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
210	-	XC6216B312MR	LVR-IC	3.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
210	ej	XC6103A231MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
210AC	-	BL8509-210ACRN	Vdet-IC	2.1V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
210AC	-	LC9009CB5TR210AC	Vdet-IC	2.1V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
210AN	-	BL8509-210ANRN	Vdet-IC	2.1V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
210AN	-	LC9009CB5TR210AN	Vdet-IC	2.1V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
210BC	-	BL8509-210BCRN	Vdet-IC	2.1V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
210BC	-	LC9009CB5TR210BC	Vdet-IC	2.1V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
210BN	-	BL8509-210BNRN	Vdet-IC	2.1V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
210BN	-	LC9009CB5TR210BN	Vdet-IC	2.1V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
210CC	-	BL8509-210CCRN	Vdet-IC	2.1V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
210CC	-	LC9009CB5TR210CC	Vdet-IC	2.1V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
210CN	-	BL8509-210CNRN	Vdet-IC	2.1V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
210CN	-	LC9009CB5TR210CN	Vdet-IC	2.1V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
210DC	-	BL8509-210DCRN	Vdet-IC	2.1V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
210DC	-	LC9009CB5TR210DC	Vdet-IC	2.1V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
210DN	-	BL8509-210DNRN	Vdet-IC	2.1V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
210DN	-	LC9009CB5TR210DN	Vdet-IC	2.1V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
210EC	-	BL8509-210ECRN	Vdet-IC	2.1V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
210EC	-	LC9009CB5TR210EC	Vdet-IC	2.1V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
210EN	-	BL8509-210ENRN	Vdet-IC	2.1V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
210EN	-	LC9009CB5TR210EN	Vdet-IC	2.1V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
210FC	-	BL8509-210FCRN	Vdet-IC	2.1V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
210FC	-	LC9009CB5TR210FC	Vdet-IC	2.1V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
210FN	-	BL8509-210FNRN	Vdet-IC	2.1V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
210FN	-	LC9009CB5TR210FN	Vdet-IC	2.1V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
210GC	-	BL8509-210GCRN	Vdet-IC	2.1V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
210GC	-	LC9009CB5TR210GC	Vdet-IC	2.1V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
210GN	-	BL8509-210GNRN	Vdet-IC	2.1V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
210GN	-	LC9009CB5TR210GN	Vdet-IC	2.1V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
211	-	R3112N111A	Vdet-IC	1.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
211	-	XC6216B322MR	LVR-IC	3.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
211	ej	XC6103A232MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
212	-	R3112N121A	Vdet-IC	1.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
212	-	XC6216B332MR	LVR-IC	3.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
212	ej	XC6103A233MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
213	-	R3112N131A	Vdet-IC	1.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
213	-	XC6216B342MR	LVR-IC	3.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
213	ej	XC6103A234MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
214	-	R3112N141A	Vdet-IC	1.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
214	-	XC6216B352MR	LVR-IC	3.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
214	ej	XC6103A235MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
215	-	R1126N151B	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
215	-	R3112N151A	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
215	-	XC6216B362MR	LVR-IC	3.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
215	ej	XC6103A236MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
216	-	R1126N161B	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
216	-	R3112N161A	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
216	-	XC6216B372MR	LVR-IC	3.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
216	ej	XC6103A237MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
217	-	R1126N171B	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
217	-	R3112N171A	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
217	-	XC6216B382MR	LVR-IC	3.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
217	ej	XC6103A238MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
218	-	R1126N181B	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
218	-	R3112N181A	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
218	-	XC6216B392MR	LVR-IC	3.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
218	ej	XC6103A239MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
219	-	R1126N191B	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
219	-	R3112N191A	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
219	-	XC6216B402MR	LVR-IC	4.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
219	ej	XC6103A240MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21A	-	AAT60021A-S5	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
21A	-	AP6213A-4HNHFGP	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21A	-	AP6213A-4HNHFPP	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21A	-	APR3021-15B	Vdet-IC	1.5V±1.5%, -Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
21A	-	XC6216B412MR	LVR-IC	4.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21A	eb	AP6213A-4HNHFGA	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21A	eb	AP6213A-4HNHFPA	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
21A	ec	AP6213A-4HNHFGA1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21A	ec	AP6213A-4HNHFPA1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
21A	eg	AP6213A-09NHFGP	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21A	eg	AP6213A-09NHFPP	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21A	eh	AP6213A-4HNHFGP1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21A	eh	AP6213A-4HNHFPP1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21A	ej	XC6103A241MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21A	ek	AP6213A-09NHFGA	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21A	ek	AP6213A-09NHFPA	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
21A	em	AP6213A-09NHFGA1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21A	em	AP6213A-09NHFPA1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
21A	en	AP6213A-09NHFGP1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21A	en	AP6213A-09NHFPP1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21-A	-	UTC8121-A	Vdet-IC	2.1V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
21B	-	AAT60021B-S5	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
21B	-	AP6213A-4HNLFGP	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21B	-	AP6213A-4HNLFPP	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21B	-	APR3021-17B	Vdet-IC	1.75V±1.5%, -Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
21B	-	XC6216B422MR	LVR-IC	4.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21B	eb	AP6213A-4HNLFGA	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21B	eb	AP6213A-4HNLFPA	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
21B	ec	AP6213A-4HNLFGA1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21B	ec	AP6213A-4HNLFPA1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
21B	eg	AP6213A-09NLFGP	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21B	eg	AP6213A-09NLFPP	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21B	eh	AP6213A-4HNLFGP1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21B	eh	AP6213A-4HNLFPP1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21B	ej	XC6103A242MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21B	ek	AP6213A-09NLFGA	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21B	ek	AP6213A-09NLFPA	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
21B	em	AP6213A-09NLFGA1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21B	em	AP6213A-09NLFPA1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
21B	en	AP6213A-09NLFGP1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21B	en	AP6213A-09NLFPP1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21-B	-	UTC8121-B	Vdet-IC	2.1V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
21C	-	AAT60021C-S5	Vdet-IC	2.1V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
21C	-	AP6213A-4HNHNGP	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21C	-	AP6213A-4HNHNPP	LVR-IC	LDO, 4.75V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
21C	-	APR3021-23B	Vdet-IC	2.32V±1.5%, -Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
21C	-	XC6216B432MR	LVR-IC	4.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21C	eb	AP6213A-4HNHNGA	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21C	eb	AP6213A-4HNHNPA	LVR-IC	LDO, 4.75V±2%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
21C	ec	AP6213A-4HNHNGA1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21C	ec	AP6213A-4HNHNPA1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
21C	eg	AP6213A-09NHNGP	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21C	eg	AP6213A-09NHNPP	LVR-IC	LDO, 0.9V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
21C	eh	AP6213A-4HNHNGP1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21C	eh	AP6213A-4HNHNPP1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
21C	ej	XC6103A243MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21C	ek	AP6213A-09NHNGA	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21C	ek	AP6213A-09NHNPA	LVR-IC	LDO, 0.9V±2%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
21C	em	AP6213A-09NHNGA1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21C	em	AP6213A-09NHNPA1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
21C	en	AP6213A-09NHNGP1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21C	en	AP6213A-09NHNPP1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
21D	-	AAT60021D-S5	Vdet-IC	2.1V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
21D	-	AP6213A-4HNLNGP	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21D	-	AP6213A-4HNLNPP	LVR-IC	LDO, 4.75V±2%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
21D	-	APR3021-26B	Vdet-IC	2.63V±1.5%, -Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
21D	-	XC6216B442MR	LVR-IC	4.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21D	eb	AP6213A-4HNLNGA	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21D	eb	AP6213A-4HNLNPA	LVR-IC	LDO, 4.75V±2%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
21D	ec	AP6213A-4HNLNGA1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21D	ec	AP6213A-4HNLNPA1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
21D	eg	AP6213A-09NLNGP	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21D	eg	AP6213A-09NLNPP	LVR-IC	LDO, 0.9V±2%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
21D	eh	AP6213A-4HNLNGP1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21D	eh	AP6213A-4HNLNPP1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
21D	ej	XC6103A244MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21D	ek	AP6213A-09NLNGA	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21D	ek	AP6213A-09NLNPA	LVR-IC	LDO, 0.9V±2%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
21D	em	AP6213A-09NLNGA1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21D	em	AP6213A-09NLNPA1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
21D	en	AP6213A-09NLNGP1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21D	en	AP6213A-09NLNPP1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
21E	-	AP6213A-4HUHFGP	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21E	-	AP6213A-4HUHFPP	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21E	-	APR3021-29B	Vdet-IC	2.93V±1.5%, -Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
21E	-	XC6216B452MR	LVR-IC	4.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21E	eb	AP6213A-4HUHFGA	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21E	eb	AP6213A-4HUHFPA	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
21E	ec	AP6213A-4HUHFGA1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21E	ec	AP6213A-4HUHFPA1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
21E	eg	AP6213A-09UHFGP	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21E	eg	AP6213A-09UHFPP	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21E	eh	AP6213A-4HUHFGP1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21E	eh	AP6213A-4HUHFPP1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21E	ej	XC6103A245MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21E	ek	AP6213A-09UHFGA	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21E	ek	AP6213A-09UHFPA	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
21E	em	AP6213A-09UHFGA1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21E	em	AP6213A-09UHFPA1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
21E	en	AP6213A-09UHFGP1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21E	en	AP6213A-09UHFPP1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21F	-	AP6213A-4HULFGP	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21F	-	AP6213A-4HULFPP	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21F	-	APR3021-30B	Vdet-IC	3.08V±1.5%, -Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
21F	-	XC6216B462MR	LVR-IC	4.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21F	eb	AP6213A-4HULFGA	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21F	eb	AP6213A-4HULFPA	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
21F	ec	AP6213A-4HULFGA1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21F	ec	AP6213A-4HULFPA1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
21F	ec	XC6103A216MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21F	eg	AP6213A-09ULFGP	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21F	eg	AP6213A-09ULFPP	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21F	eh	AP6213A-4HULFGP1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21F	eh	AP6213A-4HULFPP1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21F	ej	XC6103A246MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21F	ek	AP6213A-09ULFGA	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21F	ek	AP6213A-09ULFPA	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
21F	em	AP6213A-09ULFGA1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21F	em	AP6213A-09ULFPA1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
21F	en	AP6213A-09ULFGP1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21F	en	AP6213A-09ULFPP1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21G	-	AP6213A-4HUHNGP	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21G	-	AP6213A-4HUHNPP	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
21G	-	APR3021-39B	Vdet-IC	3.9V±1.5%, -Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
21G	eb	AP6213A-4HUHNGA	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21G	eb	AP6213A-4HUHNPA	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
21G	ec	AP6213A-4HUHNGA1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21G	ec	AP6213A-4HUHNPA1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
21G	eg	AP6213A-09UHNGP	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21G	eg	AP6213A-09UHNPP	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
21G	eh	AP6213A-4HUHNGP1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21G	eh	AP6213A-4HUHNPP1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
21G	ek	AP6213A-09UHNGA	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21G	ek	AP6213A-09UHNPA	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
21G	em	AP6213A-09UHNGA1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21G	em	AP6213A-09UHNPA1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
21G	en	AP6213A-09UHNGP1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21G	en	AP6213A-09UHNPP1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
21H	-	AP6213A-4HULNGP	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
21H	-	AP6213A-4HULNPP	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
21H	-	APR3021-43B	Vdet-IC	4.38V±1.5%, -Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
21H	-	XC6216B472MR	LVR-IC	4.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21H	eb	AP6213A-4HULNGA	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21H	eb	AP6213A-4HULNPA	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
21H	ec	AP6213A-4HULNGA1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21H	ec	AP6213A-4HULNPA1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
21H	ec	XC6103A217MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21H	eg	AP6213A-09ULNGP	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21H	eg	AP6213A-09ULNPP	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
21H	eh	AP6213A-4HULNGP1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21H	eh	AP6213A-4HULNPP1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
21H	ej	XC6103A247MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21H	ek	AP6213A-09ULNGA	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21H	ek	AP6213A-09ULNPA	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
21H	em	AP6213A-09ULNGA1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21H	em	AP6213A-09ULNPA1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
21H	en	AP6213A-09ULNGP1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21H	en	AP6213A-09ULNPP1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
21J	-	AP6213A-4HDHFGP	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21J	-	AP6213A-4HDHFPP	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21J	-	APR3021-46B	Vdet-IC	4.63V±1.5%, -Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
21J	eb	AP6213A-4HDHFGA	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21J	eb	AP6213A-4HDHFPA	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
21J	ec	AP6213A-4HDHFGA1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21J	ec	AP6213A-4HDHFPA1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
21J	eg	AP6213A-09DHFGP	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21J	eg	AP6213A-09DHFPP	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21J	eh	AP6213A-4HDHFGP1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21J	eh	AP6213A-4HDHFPP1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21J	ek	AP6213A-09DHFGA	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21J	ek	AP6213A-09DHFPA	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
21J	em	AP6213A-09DHFGA1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21J	em	AP6213A-09DHFPA1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
21J	en	AP6213A-09DHFGP1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21J	en	AP6213A-09DHFPP1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21K	-	AP6213A-4HDLFGP	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21K	-	AP6213A-4HDLFPP	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21K	-	TK71721S	LVR-IC	LDO, 2.1V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
21K	-	XC6216B482MR	LVR-IC	4.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21K	eb	AP6213A-4HDLFGA	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21K	eb	AP6213A-4HDLFPA	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
21K	ec	AP6213A-4HDLFGA1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21K	ec	AP6213A-4HDLFPA1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
21K	ec	XC6103A218MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21K	eg	AP6213A-09DLFGP	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21K	eg	AP6213A-09DLFPP	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21K	eh	AP6213A-4HDLFGP1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21K	eh	AP6213A-4HDLFPP1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21K	ej	XC6103A248MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21K	ek	AP6213A-09DLFGA	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21K	ek	AP6213A-09DLFPA	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
21K	em	AP6213A-09DLFGA1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21K	em	AP6213A-09DLFPA1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
21K	en	AP6213A-09DLFGP1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21K	en	AP6213A-09DLFPP1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
21L	-	AP6213A-4HDHNGP	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21L	-	AP6213A-4HDHNPP	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
21L	-	TK71621ASCL	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
21L	-	XC6216B492MR	LVR-IC	4.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21L	eb	AP6213A-4HDHNGA	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21L	eb	AP6213A-4HDHNPA	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
21L	ec	AP6213A-4HDHNGA1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21L	ec	AP6213A-4HDHNPA1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
21L	ec	XC6103A219MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21L	eg	AP6213A-09DHNGP	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21L	eg	AP6213A-09DHNPP	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
21L	eh	AP6213A-4HDHNGP1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21L	eh	AP6213A-4HDHNPP1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
21L	ej	XC6103A249MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
21L	ek	AP6213A-09DHNGA	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21L	ek	AP6213A-09DHNPA	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
21L	em	AP6213A-09DHNGA1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21L	em	AP6213A-09DHNPA1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
21L	en	AP6213A-09DHNGP1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21L	en	AP6213A-09DHNPP1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
21M	-	AP6213A-4HDLNGP	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21M	-	AP6213A-4HDLNPP	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
21M	-	XC6216B502MR	LVR-IC	5.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21M	eb	AP6213A-4HDLNGA	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21M	eb	AP6213A-4HDLNPA	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
21M	ec	AP6213A-4HDLNGA1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21M	ec	AP6213A-4HDLNPA1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
21M	ec	XC6103A220MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21M	eg	AP6213A-09DLNGP	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21M	eg	AP6213A-09DLNPP	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
21M	eh	AP6213A-4HDLNGP1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21M	eh	AP6213A-4HDLNPP1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
21M	ej	XC6103A250MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21M	ek	AP6213A-09DLNGA	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21M	ek	AP6213A-09DLNPA	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
21M	em	AP6213A-09DLNGA1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
21M	em	AP6213A-09DLNPA1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
21M	en	AP6213A-09DLNGP1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
21M	en	AP6213A-09DLNPP1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
21N	-	XC6216B512MR	LVR-IC	5.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21N	ec	XC6103A221MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21P	-	XC6216B522MR	LVR-IC	5.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21P	ec	XC6103A222MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21R	-	XC6216B532MR	LVR-IC	5.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21R	ec	XC6103A223MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21S	-	XC6216B542MR	LVR-IC	5.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21S	ec	XC6103A224MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21T	-	TK71421S	LVR-IC	LDO, 2.1V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
21T	-	XC6216B552MR	LVR-IC	5.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21T	ec	XC6103A225MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21U	-	XC6216B562MR	LVR-IC	5.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21U	ec	XC6103A226MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21V	-	XC6216B572MR	LVR-IC	5.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21V	ec	XC6103A227MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21X	-	XC6216B582MR	LVR-IC	5.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21X	ec	XC6103A228MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21Y	-	XC6216B592MR	LVR-IC	5.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21Y	ec	XC6103A229MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
21Z	-	XC6216B602MR	LVR-IC	6.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
21Z	ec	XC6103A230MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22	-	R1223N332B	DC-DC-IC	PWM/VFM step-down, +CE, 3.3V±2%, 500kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
22	-	RN5RF22AA	LVR-IC	LRip, -CE, 2.2V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
22	-	RN5RZ22AA	LVR-IC	LDO, LN, 2.2V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
22	-	XC62EP2202MR-G	LVR-IC	LDO, boosted, 2.2V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
22	ea	XC62ER2202MR-G	LVR-IC	LDO, boosted, 2.2V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
22-	-	XC62HR2202MR-G	LVR-IC	LDO, 2.2V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
220	-	R1126N201B	LVR-IC	LDO, Low noise, 2V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
220	-	R3112N201A	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
220	-	XC6216B612MR	LVR-IC	6.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
220	ej	XC6103A331MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
220AC	-	BL8509-220ACRN	Vdet-IC	2.2V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
220AC	-	LC9009CB5TR220AC	Vdet-IC	2.2V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
220AN	-	BL8509-220ANRN	Vdet-IC	2.2V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
220AN	-	LC9009CB5TR220AN	Vdet-IC	2.2V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
220BC	-	BL8509-220BCRN	Vdet-IC	2.2V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
220BC	-	LC9009CB5TR220BC	Vdet-IC	2.2V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
220BN	-	BL8509-220BNRN	Vdet-IC	2.2V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
220BN	-	LC9009CB5TR220BN	Vdet-IC	2.2V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
220CC	-	BL8509-220CCRN	Vdet-IC	2.2V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
220CC	-	LC9009CB5TR220CC	Vdet-IC	2.2V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
220CN	-	BL8509-220CNRN	Vdet-IC	2.2V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
220CN	-	LC9009CB5TR220CN	Vdet-IC	2.2V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
220DC	-	BL8509-220DCRN	Vdet-IC	2.2V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
220DC	-	LC9009CB5TR220DC	Vdet-IC	2.2V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
220DN	-	BL8509-220DNRN	Vdet-IC	2.2V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
220DN	-	LC9009CB5TR220DN	Vdet-IC	2.2V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
220EC	-	BL8509-220ECRN	Vdet-IC	2.2V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
220EC	-	LC9009CB5TR220EC	Vdet-IC	2.2V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
220EN	-	BL8509-220ENRN	Vdet-IC	2.2V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
220EN	-	LC9009CB5TR220EN	Vdet-IC	2.2V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
220FC	-	BL8509-220FCRN	Vdet-IC	2.2V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
220FC	-	LC9009CB5TR220FC	Vdet-IC	2.2V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
220FN	-	BL8509-220FNRN	Vdet-IC	2.2V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
220FN	-	LC9009CB5TR220FN	Vdet-IC	2.2V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
220GC	-	BL8509-220GCRN	Vdet-IC	2.2V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
220GC	-	LC9009CB5TR220GC	Vdet-IC	2.2V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
220GN	-	BL8509-220GNRN	Vdet-IC	2.2V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
220GN	-	LC9009CB5TR220GN	Vdet-IC	2.2V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
221	-	R1126N211B	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
221	-	R3112N211A	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
221	-	XC6216B622MR	LVR-IC	6.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
221	ej	XC6103A332MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
222	-	R1126N221B	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
222	-	R3112N221A	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
222	-	XC6216B632MR	LVR-IC	6.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
222	ej	XC6103A333MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
223	-	R1126N231B	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
223	-	R3112N231A	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
223	-	XC6216B642MR	LVR-IC	6.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
223	ej	XC6103A334MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
224	-	R1126N241B	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
224	-	R3112N241A	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
224	-	XC6216B652MR	LVR-IC	6.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
224	ej	XC6103A335MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
225	-	R1126N251B	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
225	-	R3112N251A	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
225	-	XC6216B662MR	LVR-IC	6.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
225	ej	XC6103A336MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
226	-	R1126N261B	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
226	-	R3112N261A	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
226	-	XC6216B672MR	LVR-IC	6.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
226	ej	XC6103A337MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
227	-	R1126N271B	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
227	-	R3112N271A	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
227	-	XC6216B682MR	LVR-IC	6.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
227	ej	XC6103A338MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
228	-	R1126N281B	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
228	-	R3112N281A	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
228	-	XC6216B692MR	LVR-IC	6.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
228	ej	XC6103A339MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
229	-	R1126N291B	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
229	-	R3112N291A	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
229	-	XC6216B702MR	LVR-IC	7.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
229	ej	XC6103A340MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22A	-	AAT60022A-S5	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
22A	-	APR3022-15B	Vdet-IC	1.5V±1.5%, +Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
22A	-	XC6216B712MR	LVR-IC	7.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22A	eg	AP6213A-21NHFGP	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22A	eg	AP6213A-21NHFPP	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
22A	ej	XC6103A341MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22A	ek	AP6213A-21NHFGA	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22A	ek	AP6213A-21NHFPA	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
22A	em	AP6213A-21NHFGA1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22A	em	AP6213A-21NHFPA1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
22A	en	AP6213A-21NHFGP1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22A	en	AP6213A-21NHFPP1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
22-A	-	UTC8122-A	Vdet-IC	2.2V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
22B	-	AAT60022B-S5	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
22B	-	APR3022-17B	Vdet-IC	1.75V±1.5%, +Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
22B	-	XC6216B722MR	LVR-IC	7.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22B	eg	AP6213A-21NLFGP	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22B	eg	AP6213A-21NLFPP	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
22B	ej	XC6103A342MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22B	ek	AP6213A-21NLFGA	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
22B	ek	AP6213A-21NLFPA	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
22B	em	AP6213A-21NLFGA1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22B	em	AP6213A-21NLFPA1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
22B	en	AP6213A-21NLFGP1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22B	en	AP6213A-21NLFPP1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
22-B	-	UTC8122-B	Vdet-IC	2.2V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
22C	-	AAT60022C-S5	Vdet-IC	2.2V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
22C	-	APR3022-23B	Vdet-IC	2.32V±1.5%, +Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
22C	-	XC6216B732MR	LVR-IC	7.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22C	eg	AP6213A-21NHNGP	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22C	eg	AP6213A-21NHNPP	LVR-IC	LDO, 2.1V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
22C	ej	XC6103A343MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22C	ek	AP6213A-21NHNGA	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22C	ek	AP6213A-21NHNPA	LVR-IC	LDO, 2.1V±2%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
22C	em	AP6213A-21NHNGA1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22C	em	AP6213A-21NHNPA1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
22C	en	AP6213A-21NHNGP1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22C	en	AP6213A-21NHNPP1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
22D	-	AAT60022D-S5	Vdet-IC	2.2V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
22D	-	APR3022-26B	Vdet-IC	2.63V±1.5%, +Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
22D	-	XC6216B742MR	LVR-IC	7.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22D	eg	AP6213A-21NLNGP	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22D	eg	AP6213A-21NLNPP	LVR-IC	LDO, 2.1V±2%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
22D	ej	XC6103A344MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22D	ek	AP6213A-21NLNGA	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22D	ek	AP6213A-21NLNPA	LVR-IC	LDO, 2.1V±2%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
22D	em	AP6213A-21NLNGA1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22D	em	AP6213A-21NLNPA1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
22D	en	AP6213A-21NLNGP1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22D	en	AP6213A-21NLNPP1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
22E	-	APR3022-29B	Vdet-IC	2.93V±1.5%, +Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
22E	-	XC6216B752MR	LVR-IC	7.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22E	eg	AP6213A-21UHFGP	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22E	eg	AP6213A-21UHFPP	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
22E	ej	XC6103A345MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22E	ek	AP6213A-21UHFGA	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22E	ek	AP6213A-21UHFPA	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
22E	em	AP6213A-21UHFGA1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22E	em	AP6213A-21UHFPA1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
22E	en	AP6213A-21UHFGP1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22E	en	AP6213A-21UHFPP1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
22F	-	APR3022-30B	Vdet-IC	3.08V±1.5%, +Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
22F	-	XC6216B762MR	LVR-IC	7.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22F	ec	XC6103A316MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22F	eg	AP6213A-21ULFGP	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22F	eg	AP6213A-21ULFPP	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
22F	ej	XC6103A346MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22F	ek	AP6213A-21ULFGA	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22F	ek	AP6213A-21ULFPA	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
22F	em	AP6213A-21ULFGA1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22F	em	AP6213A-21ULFPA1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
22F	en	AP6213A-21ULFGP1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22F	en	AP6213A-21ULFPP1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
22G	-	APR3022-39B	Vdet-IC	3.9V±1.5%, +Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
22G	eg	AP6213A-21UHNGP	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22G	eg	AP6213A-21UHNPP	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
22G	ek	AP6213A-21UHNGA	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22G	ek	AP6213A-21UHNPA	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
22G	em	AP6213A-21UHNGA1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22G	em	AP6213A-21UHNPA1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
22G	en	AP6213A-21UHNGP1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22G	en	AP6213A-21UHNPP1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
22H	-	APR3022-43B	Vdet-IC	4.38V±1.5%, +Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
22H	-	XC6216B772MR	LVR-IC	7.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22H	ec	XC6103A317MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22H	eg	AP6213A-21ULNGP	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22H	eg	AP6213A-21ULNPP	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
22H	ej	XC6103A347MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22H	ek	AP6213A-21ULNGA	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22H	ek	AP6213A-21ULNPA	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
22H	em	AP6213A-21ULNGA1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22H	em	AP6213A-21ULNPA1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
22H	en	AP6213A-21ULNGP1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22H	en	AP6213A-21ULNPP1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
22J	-	APR3022-46B	Vdet-IC	4.63V±1.5%, +Reset PPO	SOT-23-5	28vd1	VD7	6kd	Anp
22J	eg	AP6213A-21DHFGP	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22J	eg	AP6213A-21DHFPP	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
22J	ek	AP6213A-21DHFGA	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22J	ek	AP6213A-21DHFPA	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
22J	em	AP6213A-21DHFGA1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22J	em	AP6213A-21DHFPA1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
22J	en	AP6213A-21DHFGP1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22J	en	AP6213A-21DHFPP1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
22K	-	TK71722S	LVR-IC	LDO, 2.2V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
22K	-	XC6216B782MR	LVR-IC	7.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22K	ec	XC6103A318MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22K	eg	AP6213A-21DLFGP	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22K	eg	AP6213A-21DLFPP	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
22K	ej	XC6103A348MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22K	ek	AP6213A-21DLFGA	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22K	ek	AP6213A-21DLFPA	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
22K	em	AP6213A-21DLFGA1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22K	em	AP6213A-21DLFPA1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
22K	en	AP6213A-21DLFGP1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22K	en	AP6213A-21DLFPP1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
22L	-	TK71622ASCL	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
22L	-	XC6216B792MR	LVR-IC	7.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22L	ec	XC6103A319MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22L	eg	AP6213A-21DHNGP	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22L	eg	AP6213A-21DHNPP	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
22L	ej	XC6103A349MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22L	ek	AP6213A-21DHNGA	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22L	ek	AP6213A-21DHNPA	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
22L	em	AP6213A-21DHNGA1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22L	em	AP6213A-21DHNPA1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
22L	en	AP6213A-21DHNGP1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22L	en	AP6213A-21DHNPP1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
22M	-	XC6216B802MR	LVR-IC	8.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22M	ec	XC6103A320MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22M	eg	AP6213A-21DLNGP	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22M	eg	AP6213A-21DLNPP	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
22M	ej	XC6103A350MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22M	ek	AP6213A-21DLNGA	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22M	ek	AP6213A-21DLNPA	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
22M	em	AP6213A-21DLNGA1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
22M	em	AP6213A-21DLNPA1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
22M	en	AP6213A-21DLNGP1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
22M	en	AP6213A-21DLNPP1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
22N	-	XC6216B812MR	LVR-IC	8.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22N	ec	XC6103A321MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22P	-	XC6216B822MR	LVR-IC	8.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22P	ec	XC6103A322MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22R	-	XC6216B832MR	LVR-IC	8.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22R	ec	XC6103A323MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22S	-	XC6216B842MR	LVR-IC	8.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22S	ec	XC6103A324MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22T	-	TK71422S	LVR-IC	LDO, 2.2V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
22T	-	XC6216B852MR	LVR-IC	8.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22T	ec	XC6103A325MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22U	-	XC6216B862MR	LVR-IC	8.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22U	ec	XC6103A326MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22V	-	XC6216B872MR	LVR-IC	8.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22V	ec	XC6103A327MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22X	-	XC6216B882MR	LVR-IC	8.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22X	ec	XC6103A328MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22Y	-	XC6216B892MR	LVR-IC	8.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22Y	ec	XC6103A329MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
22Z	-	XC6216B902MR	LVR-IC	9.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
22Z	ec	XC6103A330MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23	-	R1223N502B	DC-DC-IC	PWM/VFM step-down, +CE, 5V±2%, 500kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
23	-	RN5RF23AA	LVR-IC	LRip, -CE, 2.3V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
23	-	RN5RZ23AA	LVR-IC	LDO, LN, 2.3V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
23	-	XC62EP2302MR-G	LVR-IC	LDO, boosted, 2.3V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
23	ea	XC62ER2302MR-G	LVR-IC	LDO, boosted, 2.3V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
23-	-	XC62HR2302MR-G	LVR-IC	LDO, 2.3V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
230	-	R1126N301B	LVR-IC	LDO, Low noise, 3V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
230	-	R3112N301A	Vdet-IC	3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
230	-	XC6216B912MR	LVR-IC	9.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
230	ej	XC6103A431MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
230AC	-	BL8509-230ACRN	Vdet-IC	2.3V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
230AC	-	LC9009CB5TR230AC	Vdet-IC	2.3V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
230AN	-	BL8509-230ANRN	Vdet-IC	2.3V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
230AN	-	LC9009CB5TR230AN	Vdet-IC	2.3V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
230BC	-	BL8509-230BCRN	Vdet-IC	2.3V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
230BC	-	LC9009CB5TR230BC	Vdet-IC	2.3V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
230BN	-	BL8509-230BNRN	Vdet-IC	2.3V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
230BN	-	LC9009CB5TR230BN	Vdet-IC	2.3V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
230CC	-	BL8509-230CCRN	Vdet-IC	2.3V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
230CC	-	LC9009CB5TR230CC	Vdet-IC	2.3V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
230CN	-	BL8509-230CNRN	Vdet-IC	2.3V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
230CN	-	LC9009CB5TR230CN	Vdet-IC	2.3V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
230DC	-	BL8509-230DCRN	Vdet-IC	2.3V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
230DC	-	LC9009CB5TR230DC	Vdet-IC	2.3V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
230DN	-	BL8509-230DNRN	Vdet-IC	2.3V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
230DN	-	LC9009CB5TR230DN	Vdet-IC	2.3V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
230EC	-	BL8509-230ECRN	Vdet-IC	2.3V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
230EC	-	LC9009CB5TR230EC	Vdet-IC	2.3V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
230EN	-	BL8509-230ENRN	Vdet-IC	2.3V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
230EN	-	LC9009CB5TR230EN	Vdet-IC	2.3V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
230FC	-	BL8509-230FCRN	Vdet-IC	2.3V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
230FC	-	LC9009CB5TR230FC	Vdet-IC	2.3V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
230FN	-	BL8509-230FNRN	Vdet-IC	2.3V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
230FN	-	LC9009CB5TR230FN	Vdet-IC	2.3V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
230GC	-	BL8509-230GCRN	Vdet-IC	2.3V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
230GC	-	LC9009CB5TR230GC	Vdet-IC	2.3V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
230GN	-	BL8509-230GNRN	Vdet-IC	2.3V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
230GN	-	LC9009CB5TR230GN	Vdet-IC	2.3V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
231	-	R1126N311B	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
231	-	R3112N311A	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
231	-	XC6216B922MR	LVR-IC	9.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
231	ej	XC6103A432MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
232	-	R1126N321B	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
232	-	R3112N321A	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
232	-	XC6216B932MR	LVR-IC	9.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
232	ej	XC6103A433MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
233	-	R1126N331B	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
233	-	R3112N331A	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
233	-	XC6216B942MR	LVR-IC	9.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
233	ej	XC6103A434MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
234	-	R1126N341B	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
234	-	R3112N341A	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
234	-	XC6216B952MR	LVR-IC	9.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
234	ej	XC6103A435MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
235	-	R1126N351B	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
235	-	R3112N351A	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
235	-	XC6216B962MR	LVR-IC	9.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
235	ej	XC6103A436MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
236	-	R1126N361B	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
236	-	R3112N361A	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
236	-	XC6216B972MR	LVR-IC	9.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
236	ej	XC6103A437MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
237	-	R1126N371B	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
237	-	R3112N371A	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
237	-	XC6216B982MR	LVR-IC	9.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
237	ej	XC6103A438MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
238	-	R1126N381B	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
238	-	R3112N381A	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
238	-	XC6216B992MR	LVR-IC	9.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
238	ej	XC6103A439MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
239	-	R1126N391B	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
239	-	R3112N391A	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
239	-	XC6216BA02MR	LVR-IC	10.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
239	ej	XC6103A440MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23A	-	AAT60023A-S5	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
23A	-	APR3023-15B	Vdet-IC	1.5V±1.5%, -Reset ODO	SOT-23-5	28vd1	VD6	6kd	Anp
23A	-	XC6216BA12MR	LVR-IC	10.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23A	ej	XC6103A441MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23-A	-	UTC8123-A	Vdet-IC	2.3V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
23B	-	AAT60023B-S5	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
23B	-	APR3023-17B	Vdet-IC	1.75V±1.5%, -Reset ODO	SOT-23-5	28vd1	VD6	6kd	Anp
23B	-	XC6216BA22MR	LVR-IC	10.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23B	ej	XC6103A442MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23-B	-	UTC8123-B	Vdet-IC	2.3V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
23C	-	AAT60023C-S5	Vdet-IC	2.3V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
23C	-	APR3023-23B	Vdet-IC	2.32V±1.5%, -Reset ODO	SOT-23-5	28vd1	VD6	6kd	Anp
23C	-	XC6216BA32MR	LVR-IC	10.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23C	ej	XC6103A443MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23D	-	AAT60023D-S5	Vdet-IC	2.3V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
23D	-	APR3023-26B	Vdet-IC	2.63V±1.5%, -Reset ODO	SOT-23-5	28vd1	VD6	6kd	Anp
23D	-	XC6216BA42MR	LVR-IC	10.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23D	ej	XC6103A444MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23E	-	APR3023-29B	Vdet-IC	2.93V±1.5%, -Reset ODO	SOT-23-5	28vd1	VD6	6kd	Anp
23E	-	XC6216BA52MR	LVR-IC	10.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23E	ej	XC6103A445MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23F	-	APR3023-30B	Vdet-IC	3.08V±1.5%, -Reset ODO	SOT-23-5	28vd1	VD6	6kd	Anp
23F	-	XC6216BA62MR	LVR-IC	10.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23F	ec	XC6103A416MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23F	ej	XC6103A446MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23G	-	APR3023-39B	Vdet-IC	3.9V±1.5%, -Reset ODO	SOT-23-5	28vd1	VD6	6kd	Anp
23H	-	APR3023-43B	Vdet-IC	4.38V±1.5%, -Reset ODO	SOT-23-5	28vd1	VD6	6kd	Anp
23H	-	XC6216BA72MR	LVR-IC	10.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23H	ec	XC6103A417MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23H	ej	XC6103A447MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23J	-	APR3023-46B	Vdet-IC	4.63V±1.5%, -Reset ODO	SOT-23-5	28vd1	VD6	6kd	Anp
23K	-	TK71723S	LVR-IC	LDO, 2.3V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
23K	-	XC6216BA82MR	LVR-IC	10.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23K	ec	XC6103A418MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23K	ej	XC6103A448MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23L	-	TK71623ASCL	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
23L	-	XC6216BA92MR	LVR-IC	10.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23L	ec	XC6103A419MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23L	ej	XC6103A449MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23M	-	XC6216BB02MR	LVR-IC	11.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23M	ec	XC6103A420MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23M	ej	XC6103A450MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23N	-	XC6216BB12MR	LVR-IC	11.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23N	ec	XC6103A421MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23P	-	XC6216BB22MR	LVR-IC	11.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23P	ec	XC6103A422MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23R	-	XC6216BB32MR	LVR-IC	11.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23R	ec	XC6103A423MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23S	-	XC6216BB42MR	LVR-IC	11.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23S	ec	XC6103A424MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23T	-	TK71423S	LVR-IC	LDO, 2.3V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
23T	-	XC6216BB52MR	LVR-IC	11.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23T	ec	XC6103A425MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23U	-	TK61023S	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Tok
23U	-	XC6216BB62MR	LVR-IC	11.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23U	ec	XC6103A426MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23V	-	XC6216BB72MR	LVR-IC	11.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23V	ec	XC6103A427MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23X	-	XC6216BB82MR	LVR-IC	11.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23X	ec	XC6103A428MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23Y	-	XC6216BB92MR	LVR-IC	11.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23Y	ec	XC6103A429MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
23Z	-	XC6216BC02MR	LVR-IC	12.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
23Z	ec	XC6103A430MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24	-	R1223N152E	DC-DC-IC	PWM/VFM step-down, +CE, 1.5V±2%, 300kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
24	-	RN5RF24AA	LVR-IC	LRip, -CE, 2.4V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
24	-	RN5RZ24AA	LVR-IC	LDO, LN, 2.4V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
24	-	XC62EP2402MR-G	LVR-IC	LDO, boosted, 2.4V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
24	ea	XC62ER2402MR-G	LVR-IC	LDO, boosted, 2.4V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
24-	-	XC62HR2402MR-G	LVR-IC	LDO, 2.4V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
240	-	R1126N401B	LVR-IC	LDO, Low noise, 4V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
240	-	R3112N401A	Vdet-IC	4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
240	ej	XC6103A531MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
240AC	-	BL8509-240ACRN	Vdet-IC	2.4V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
240AC	-	LC9009CB5TR240AC	Vdet-IC	2.4V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
240AN	-	BL8509-240ANRN	Vdet-IC	2.4V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
240AN	-	LC9009CB5TR240AN	Vdet-IC	2.4V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
240BC	-	BL8509-240BCRN	Vdet-IC	2.4V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
240BC	-	LC9009CB5TR240BC	Vdet-IC	2.4V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
240BN	-	BL8509-240BNRN	Vdet-IC	2.4V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
240BN	-	LC9009CB5TR240BN	Vdet-IC	2.4V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
240CC	-	BL8509-240CCRN	Vdet-IC	2.4V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
240CC	-	LC9009CB5TR240CC	Vdet-IC	2.4V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
240CN	-	BL8509-240CNRN	Vdet-IC	2.4V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
240CN	-	LC9009CB5TR240CN	Vdet-IC	2.4V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
240DC	-	BL8509-240DCRN	Vdet-IC	2.4V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
240DC	-	LC9009CB5TR240DC	Vdet-IC	2.4V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
240DN	-	BL8509-240DNRN	Vdet-IC	2.4V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
240DN	-	LC9009CB5TR240DN	Vdet-IC	2.4V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
240EC	-	BL8509-240ECRN	Vdet-IC	2.4V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
240EC	-	LC9009CB5TR240EC	Vdet-IC	2.4V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
240EN	-	BL8509-240ENRN	Vdet-IC	2.4V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
240EN	-	LC9009CB5TR240EN	Vdet-IC	2.4V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
240FC	-	BL8509-240FCRN	Vdet-IC	2.4V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
240FC	-	LC9009CB5TR240FC	Vdet-IC	2.4V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
240FN	-	BL8509-240FNRN	Vdet-IC	2.4V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
240FN	-	LC9009CB5TR240FN	Vdet-IC	2.4V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
240GC	-	BL8509-240GCRN	Vdet-IC	2.4V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
240GC	-	LC9009CB5TR240GC	Vdet-IC	2.4V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
240GN	-	BL8509-240GNRN	Vdet-IC	2.4V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
240GN	-	LC9009CB5TR240GN	Vdet-IC	2.4V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
241	-	R1126N181B5	LVR-IC	LDO, Low noise, 1.85V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
241	-	R3112N411A	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
241	ej	XC6103A532MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
242	-	R1126N281B5	LVR-IC	LDO, Low noise, 2.85V±2%, 150mA, +CE	SOT-23-5	28vc	VR4	6g	Ric
242	-	R3112N421A	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
242	ej	XC6103A533MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
243	-	R3112N431A	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
243	ej	XC6103A534MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
244	-	R3112N441A	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
244	ej	XC6103A535MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
245	-	R3112N451A	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
245	ej	XC6103A536MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
246	-	R3112N461A	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
246	ej	XC6103A537MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
247	-	R3112N471A	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
247	ej	XC6103A538MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
248	-	R3112N481A	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
248	ej	XC6103A539MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
249	-	R3112N491A	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
249	ej	XC6103A540MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24A	-	AAT60024A-S5	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
24A	-	AP6213A-10NHFGP	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24A	-	AP6213A-10NHFPP	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
24A	eb	AP6213A-10NHFGA	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24A	eb	AP6213A-10NHFPA	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
24A	ec	AP6213A-10NHFGA1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24A	ec	AP6213A-10NHFPA1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
24A	eh	AP6213A-10NHFGP1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24A	eh	AP6213A-10NHFPP1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
24A	ej	XC6103A541MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24-A	-	UTC8124-A	Vdet-IC	2.4V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
24A1	-	MAS9124AST1-T	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Mas
24A2	-	MAS9124AST2-T	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Mas
24A3	-	MAS9124AST3-T	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Mas
24A4	-	MAS9124AST4-T	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Mas
24A5	-	MAS9124AST5-T	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Mas



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
24A6	-	MAS9124AST6-T	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Mas
24A7	-	MAS9124AST7-T	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Mas
24A8	-	MAS9124AST8-T	LVR-IC	LDO, 2.86V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Mas
24A9	-	MAS9124AST9-T	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Mas
24AA	-	MAS9124ASTA-T	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Mas
24AB	-	MAS9124ASTB-T	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Mas
24AC	-	MAS9124ASTC-T	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Mas
24AD	-	MAS9124ASTD-T	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Mas
24AF	-	MAS9124ASTF-T	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Mas
24AG	-	MAS9124ASTG-T	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Mas
24B	-	AAT60024B-S5	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
24B	-	AP6213A-10NLFGP	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24B	-	AP6213A-10NLFPP	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
24B	eb	AP6213A-10NLFGA	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24B	eb	AP6213A-10NLFPA	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
24B	ec	AP6213A-10NLFGA1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24B	ec	AP6213A-10NLFPA1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
24B	eh	AP6213A-10NLFGP1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24B	eh	AP6213A-10NLFPP1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
24B	ej	XC6103A542MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24-B	-	UTC8124-B	Vdet-IC	2.4V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
24C	-	AAT60024C-S5	Vdet-IC	2.4V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
24C	-	AP6213A-10NHNGP	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24C	-	AP6213A-10NHNPP	LVR-IC	LDO, 1.0V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
24C	eb	AP6213A-10NHNGA	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24C	eb	AP6213A-10NHNPA	LVR-IC	LDO, 1.0V±2%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
24C	ec	AP6213A-10NHNGA1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24C	ec	AP6213A-10NHNPA1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
24C	eh	AP6213A-10NHNGP1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24C	eh	AP6213A-10NHNPP1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
24C	ej	XC6103A543MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24D	-	AAT60024D-S5	Vdet-IC	2.4V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
24D	-	AP6213A-10NLNGP	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24D	-	AP6213A-10NLNPP	LVR-IC	LDO, 1.0V±2%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
24D	eb	AP6213A-10NLNGA	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24D	eb	AP6213A-10NLNPA	LVR-IC	LDO, 1.0V±2%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
24D	ec	AP6213A-10NLNGA1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24D	ec	AP6213A-10NLNPA1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
24D	eh	AP6213A-10NLNGP1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24D	eh	AP6213A-10NLNPP1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
24D	ej	XC6103A544MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24E	-	AP6213A-10UHFGP	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24E	-	AP6213A-10UHFPP	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
24E	eb	AP6213A-10UHFGA	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24E	eb	AP6213A-10UHFPA	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
24E	ec	AP6213A-10UHFGA1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24E	ec	AP6213A-10UHFPA1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
24E	eh	AP6213A-10UHFGP1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24E	eh	AP6213A-10UHFPP1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
24E	ej	XC6103A545MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24F	-	AP6213A-10ULFGP	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24F	-	AP6213A-10ULFPP	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
24F	eb	AP6213A-10ULFGA	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24F	eb	AP6213A-10ULFPA	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
24F	ec	AP6213A-10ULFGA1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24F	ec	AP6213A-10ULFPA1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
24F	ec	XC6103A516MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24F	eh	AP6213A-10ULFGP1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24F	eh	AP6213A-10ULFPP1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
24F	ej	XC6103A546MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24G	-	AP6213A-10UHNGP	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24G	-	AP6213A-10UHNPP	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
24G	eb	AP6213A-10UHNGA	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24G	eb	AP6213A-10UHNPA	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
24G	ec	AP6213A-10UHNGA1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24G	ec	AP6213A-10UHNPA1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
24G	eh	AP6213A-10UHNGP1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24G	eh	AP6213A-10UHNPP1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
24H	-	AP6213A-10ULNGP	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24H	-	AP6213A-10ULNPP	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
24H	eb	AP6213A-10ULNGA	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24H	eb	AP6213A-10ULNPA	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
24H	ec	AP6213A-10ULNGA1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24H	ec	AP6213A-10ULNPA1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
24H	ec	XC6103A517MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24H	eh	AP6213A-10ULNGP1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24H	eh	AP6213A-10ULNPP1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
24H	ej	XC6103A547MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24J	-	AP6213A-10DHFGP	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24J	-	AP6213A-10DHFPP	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
24J	eb	AP6213A-10DHFGA	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24J	eb	AP6213A-10DHFPA	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
24J	ec	AP6213A-10DHFGA1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24J	ec	AP6213A-10DHFPA1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
24J	eh	AP6213A-10DHFGP1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24J	eh	AP6213A-10DHFPP1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
24K	-	AP6213A-10DLFGP	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24K	-	AP6213A-10DLFPP	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
24K	-	TK71724S	LVR-IC	LDO, 2.4V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
24K	eb	AP6213A-10DLFGA	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24K	eb	AP6213A-10DLFPA	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
24K	ec	AP6213A-10DLFGA1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24K	ec	AP6213A-10DLFPA1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
24K	ec	XC6103A518MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24K	eh	AP6213A-10DLFGP1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24K	eh	AP6213A-10DLFPP1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
24K	ej	XC6103A548MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24L	-	AP6213A-10DHNGP	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24L	-	AP6213A-10DHNPP	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
24L	-	TK71624ASCL	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
24L	eb	AP6213A-10DHNGA	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24L	eb	AP6213A-10DHNPA	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
24L	ec	AP6213A-10DHNGA1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24L	ec	AP6213A-10DHNPA1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
24L	ec	XC6103A519MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24L	eh	AP6213A-10DHNGP1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24L	eh	AP6213A-10DHNPP1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
24L	ej	XC6103A549MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24M	-	AP6213A-10DLNGP	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24M	-	AP6213A-10DLNPP	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
24M	eb	AP6213A-10DLNGA	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24M	eb	AP6213A-10DLNPA	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
24M	ec	AP6213A-10DLNGA1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
24M	ec	AP6213A-10DLNPA1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
24M	ec	XC6103A520MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24M	eh	AP6213A-10DLNGP1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
24M	eh	AP6213A-10DLNPP1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
24M	ej	XC6103A550MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24N	ec	XC6103A521MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24P	ec	XC6103A522MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24R	ec	XC6103A523MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24S	ec	XC6103A524MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24T	-	TK71424S	LVR-IC	LDO, 2.4V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
24T	ec	XC6103A525MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24U	ec	XC6103A526MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24V	ec	XC6103A527MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24X	ec	XC6103A528MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24Y	ec	XC6103A529MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
24Z	ec	XC6103A530MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25	-	R1223N182E	DC-DC-IC	PWM/VFM step-down, +CE, 1.8V±2%, 300kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
25	-	RN5RF25AA	LVR-IC	LRip, -CE, 2.5V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
25	-	RN5RZ25AA	LVR-IC	LDO, LN, 2.5V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
25	-	XC62EP2502MR-G	LVR-IC	LDO, boosted, 2.5V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
25	ea	XC62ER2502MR-G	LVR-IC	LDO, boosted, 2.5V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
25-	-	XC62HR2502MR-G	LVR-IC	LDO, 2.5V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
250	-	R3112N501A	Vdet-IC	5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
250	ej	XC6103A631MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
250AC	-	BL8509-250ACRN	Vdet-IC	2.5V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
250AC	-	LC9009CB5TR250AC	Vdet-IC	2.5V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
250AN	-	BL8509-250ANRN	Vdet-IC	2.5V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
250AN	-	LC9009CB5TR250AN	Vdet-IC	2.5V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
250BC	-	BL8509-250BCRN	Vdet-IC	2.5V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
250BC	-	LC9009CB5TR250BC	Vdet-IC	2.5V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
250BN	-	BL8509-250BNRN	Vdet-IC	2.5V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
250BN	-	LC9009CB5TR250BN	Vdet-IC	2.5V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
250CC	-	BL8509-250CCRN	Vdet-IC	2.5V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
250CC	-	LC9009CB5TR250CC	Vdet-IC	2.5V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
250CN	-	BL8509-250CNRN	Vdet-IC	2.5V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
250CN	-	LC9009CB5TR250CN	Vdet-IC	2.5V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
250DC	-	BL8509-250DCRN	Vdet-IC	2.5V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
250DC	-	LC9009CB5TR250DC	Vdet-IC	2.5V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
250DN	-	BL8509-250DNRN	Vdet-IC	2.5V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
250DN	-	LC9009CB5TR250DN	Vdet-IC	2.5V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
250EC	-	BL8509-250ECRN	Vdet-IC	2.5V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
250EC	-	LC9009CB5TR250EC	Vdet-IC	2.5V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
250EN	-	BL8509-250ENRN	Vdet-IC	2.5V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
250EN	-	LC9009CB5TR250EN	Vdet-IC	2.5V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
250FC	-	BL8509-250FCRN	Vdet-IC	2.5V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
250FC	-	LC9009CB5TR250FC	Vdet-IC	2.5V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
250FN	-	BL8509-250FNRN	Vdet-IC	2.5V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
250FN	-	LC9009CB5TR250FN	Vdet-IC	2.5V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
250GC	-	BL8509-250GCRN	Vdet-IC	2.5V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
250GC	-	LC9009CB5TR250GC	Vdet-IC	2.5V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
250GN	-	BL8509-250GNRN	Vdet-IC	2.5V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
250GN	-	LC9009CB5TR250GN	Vdet-IC	2.5V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
251	ej	XC6103A632MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
252	ej	XC6103A633MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
253	ej	XC6103A634MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
254	ej	XC6103A635MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
255	ej	XC6103A636MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
256	ej	XC6103A637MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
257	ej	XC6103A638MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
258	ej	XC6103A639MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
259	ej	XC6103A640MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25A	-	AAT60025A-S5	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
25A	-	AP6213A-12NHFGP	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25A	-	AP6213A-12NHFPP	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
25A	-	KIC3210T-025	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	TSV	28vrx	VR7	6l	Kec
25A	eb	AP6213A-12NHFGA	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25A	eb	AP6213A-12NHFPA	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
25A	ec	AP6213A-12NHFGA1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25A	ec	AP6213A-12NHFPA1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
25A	eh	AP6213A-12NHFGP1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25A	eh	AP6213A-12NHFPP1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
25A	ej	XC6103A641MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25-A	-	UTC8125-A	Vdet-IC	2.5V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
25B	-	AAT60025B-S5	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
25B	-	AP6213A-12NLFGP	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25B	-	AP6213A-12NLFPP	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
25B	eb	AP6213A-12NLFGA	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25B	eb	AP6213A-12NLFPA	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
25B	ec	AP6213A-12NLFGA1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25B	ec	AP6213A-12NLFPA1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
25B	eh	AP6213A-12NLFGP1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25B	eh	AP6213A-12NLFPP1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
25B	ej	XC6103A642MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25-B	-	UTC8125-B	Vdet-IC	2.5V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
25C	-	AAT60025C-S5	Vdet-IC	2.5V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
25C	-	AP6213A-12NHNGP	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25C	-	AP6213A-12NHNPP	LVR-IC	LDO, 1.2V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
25C	eb	AP6213A-12NHNGA	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25C	eb	AP6213A-12NHNPA	LVR-IC	LDO, 1.2V±2%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
25C	ec	AP6213A-12NHNGA1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25C	ec	AP6213A-12NHNPA1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
25C	eh	AP6213A-12NHNGP1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25C	eh	AP6213A-12NHNPP1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
25C	ej	XC6103A643MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25D	-	AAT60025D-S5	Vdet-IC	2.5V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
25D	-	AP6213A-12NLNGP	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25D	-	AP6213A-12NLNPP	LVR-IC	LDO, 1.2V±2%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
25D	eb	AP6213A-12NLNGA	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25D	eb	AP6213A-12NLNPA	LVR-IC	LDO, 1.2V±2%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
25D	ec	AP6213A-12NLNGA1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25D	ec	AP6213A-12NLNPA1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
25D	eh	AP6213A-12NLNGP1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25D	eh	AP6213A-12NLNPP1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
25D	ej	XC6103A644MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25E	-	AP6213A-12UHFGP	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25E	-	AP6213A-12UHFPP	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
25E	eb	AP6213A-12UHFGA	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25E	eb	AP6213A-12UHFPA	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
25E	ec	AP6213A-12UHFGA1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25E	ec	AP6213A-12UHFPA1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
25E	eh	AP6213A-12UHFGP1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25E	eh	AP6213A-12UHFPP1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
25E	ej	XC6103A645MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25F	-	AP6213A-12ULFGP	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25F	-	AP6213A-12ULFPP	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
25F	eb	AP6213A-12ULFGA	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25F	eb	AP6213A-12ULFPA	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
25F	ec	AP6213A-12ULFGA1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25F	ec	AP6213A-12ULFPA1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
25F	ec	XC6103A616MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25F	eh	AP6213A-12ULFGP1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25F	eh	AP6213A-12ULFPP1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
25F	ej	XC6103A646MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25G	-	AP6213A-12UHNGP	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25G	-	AP6213A-12UHNPP	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
25G	eb	AP6213A-12UHNGA	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25G	eb	AP6213A-12UHNPA	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
25G	ec	AP6213A-12UHNGA1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25G	ec	AP6213A-12UHNPA1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
25G	eh	AP6213A-12UHNGP1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25G	eh	AP6213A-12UHNPP1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
25H	-	AP6213A-12ULNGP	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25H	-	AP6213A-12ULNPP	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
25H	eb	AP6213A-12ULNGA	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25H	eb	AP6213A-12ULNPA	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
25H	ec	AP6213A-12ULNGA1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25H	ec	AP6213A-12ULNPA1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
25H	ec	XC6103A617MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25H	eh	AP6213A-12ULNGP1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25H	eh	AP6213A-12ULNPP1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
25H	ej	XC6103A647MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25J	-	AP6213A-12DHFGP	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25J	-	AP6213A-12DHFPP	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
25J	eb	AP6213A-12DHFGA	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25J	eb	AP6213A-12DHFPA	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
25J	ec	AP6213A-12DHFGA1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25J	ec	AP6213A-12DHFPA1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
25J	eh	AP6213A-12DHFGP1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25J	eh	AP6213A-12DHFPP1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
25K	-	AP6213A-12DLFGP	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25K	-	AP6213A-12DLFPP	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
25K	-	TK71725S	LVR-IC	LDO, 2.5V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
25K	eb	AP6213A-12DLFGA	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25K	eb	AP6213A-12DLFPA	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
25K	ec	AP6213A-12DLFGA1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25K	ec	AP6213A-12DLFPA1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
25K	ec	XC6103A618MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25K	eh	AP6213A-12DLFGP1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25K	eh	AP6213A-12DLFPP1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
25K	ej	XC6103A648MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25L	-	AP6213A-12DHNGP	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25L	-	AP6213A-12DHNPP	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
25L	-	TK71625ASCL	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
25L	eb	AP6213A-12DHNGA	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25L	eb	AP6213A-12DHNPA	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
25L	ec	AP6213A-12DHNGA1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25L	ec	AP6213A-12DHNPA1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
25L	ec	XC6103A619MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25L	eh	AP6213A-12DHNGP1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25L	eh	AP6213A-12DHNPP1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
25L	ej	XC6103A649MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25M	-	AP6213A-12DLNGP	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25M	-	AP6213A-12DLNPP	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
25M	eb	AP6213A-12DLNGA	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25M	eb	AP6213A-12DLNPA	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
25M	ec	AP6213A-12DLNGA1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
25M	ec	AP6213A-12DLNPA1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
25M	ec	XC6103A620MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25M	eh	AP6213A-12DLNGP1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
25M	eh	AP6213A-12DLNPP1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
25M	ej	XC6103A650MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25N	ec	XC6103A621MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25P	ec	XC6103A622MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25R	ec	XC6103A623MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25S	ec	XC6103A624MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25T	-	TK71425S	LVR-IC	LDO, 2.5V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
25T	ec	XC6103A625MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25U	-	TK61025S	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Tok
25U	ec	XC6103A626MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25V	ec	XC6103A627MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25X	ec	XC6103A628MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25Y	ec	XC6103A629MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
25Z	ec	XC6103A630MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
26	-	R1223N252E	DC-DC-IC	PWM/VFM step-down, +CE, 2.5V±2%, 300kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
26	-	RN5RF26AA	LVR-IC	LRip, -CE, 2.6V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
26	-	RN5RZ26AA	LVR-IC	LDO, LN, 2.6V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
26	-	XC62EP2602MR-G	LVR-IC	LDO, boosted, 2.6V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
26	ea	XC62ER2602MR-G	LVR-IC	LDO, boosted, 2.6V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
26-	-	XC62HR2602MR-G	LVR-IC	LDO, 2.6V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
260	ej	XC6103B231MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
260AC	-	BL8509-260ACRN	Vdet-IC	2.6V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
260AC	-	LC9009CB5TR260AC	Vdet-IC	2.6V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
260AN	-	BL8509-260ANRN	Vdet-IC	2.6V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
260AN	-	LC9009CB5TR260AN	Vdet-IC	2.6V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
260BC	-	BL8509-260BCRN	Vdet-IC	2.6V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
260BC	-	LC9009CB5TR260BC	Vdet-IC	2.6V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
260BN	-	BL8509-260BNRN	Vdet-IC	2.6V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
260BN	-	LC9009CB5TR260BN	Vdet-IC	2.6V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
260CC	-	BL8509-260CCRN	Vdet-IC	2.6V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
260CC	-	LC9009CB5TR260CC	Vdet-IC	2.6V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
260CN	-	BL8509-260CNRN	Vdet-IC	2.6V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
260CN	-	LC9009CB5TR260CN	Vdet-IC	2.6V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
260DC	-	BL8509-260DCRN	Vdet-IC	2.6V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
260DC	-	LC9009CB5TR260DC	Vdet-IC	2.6V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
260DN	-	BL8509-260DNRN	Vdet-IC	2.6V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
260DN	-	LC9009CB5TR260DN	Vdet-IC	2.6V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
260EC	-	BL8509-260ECRN	Vdet-IC	2.6V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
260EC	-	LC9009CB5TR260EC	Vdet-IC	2.6V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
260EN	-	BL8509-260ENRN	Vdet-IC	2.6V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
260EN	-	LC9009CB5TR260EN	Vdet-IC	2.6V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
260FC	-	BL8509-260FCRN	Vdet-IC	2.6V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
260FC	-	LC9009CB5TR260FC	Vdet-IC	2.6V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
260FN	-	BL8509-260FNRN	Vdet-IC	2.6V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
260FN	-	LC9009CB5TR260FN	Vdet-IC	2.6V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
260GC	-	BL8509-260GCRN	Vdet-IC	2.6V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
260GC	-	LC9009CB5TR260GC	Vdet-IC	2.6V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
260GN	-	BL8509-260GNRN	Vdet-IC	2.6V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
260GN	-	LC9009CB5TR260GN	Vdet-IC	2.6V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
261	ej	XC6103B232MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
262	ej	XC6103B233MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
263	ej	XC6103B234MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
263AC	-	BL8509-263ACRN	Vdet-IC	2.63V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
263AN	-	BL8509-263ANRN	Vdet-IC	2.63V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
263BC	-	BL8509-263BCRN	Vdet-IC	2.63V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
263BN	-	BL8509-263BNRN	Vdet-IC	2.63V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
263CC	-	BL8509-263CCRN	Vdet-IC	2.63V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
263CN	-	BL8509-263CNRN	Vdet-IC	2.63V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
263DC	-	BL8509-263DCRN	Vdet-IC	2.63V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
263DN	-	BL8509-263DNRN	Vdet-IC	2.63V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
263EC	-	BL8509-263ECRN	Vdet-IC	2.63V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
263EN	-	BL8509-263ENRN	Vdet-IC	2.63V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
263FC	-	BL8509-263FCRN	Vdet-IC	2.63V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
263FN	-	BL8509-263FNRN	Vdet-IC	2.63V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
263GC	-	BL8509-263GCRN	Vdet-IC	2.63V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
263GN	-	BL8509-263GNRN	Vdet-IC	2.63V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
264	ej	XC6103B235MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
265	ej	XC6103B236MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
266	ej	XC6103B237MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
267	ej	XC6103B238MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
268	ej	XC6103B239MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
269	ej	XC6103B240MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26A	-	AAT60026A-S5	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
26A	-	KIC3210T-026	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	TSV	28vrx	VR7	6l	Kec
26A	ej	XC6103B241MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26-A	-	UTC8126-A	Vdet-IC	2.6V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
26B	-	AAT60026B-S5	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
26B	ej	XC6103B242MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26-B	-	UTC8126-B	Vdet-IC	2.6V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
26C	-	AAT60026C-S5	Vdet-IC	2.6V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
26C	ej	XC6103B243MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26D	-	AAT60026D-S5	Vdet-IC	2.6V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
26D	ej	XC6103B244MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26E	ej	XC6103B245MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26F	ec	XC6103B216MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26F	ej	XC6103B246MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26H	ec	XC6103B217MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26H	ej	XC6103B247MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26K	-	TK71726S	LVR-IC	LDO, 2.6V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
26K	ec	XC6103B218MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26K	ej	XC6103B248MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26L	-	TK71626ASCL	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
26L	ec	XC6103B219MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26L	ej	XC6103B249MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26M	ec	XC6103B220MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26M	ej	XC6103B250MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26N	ec	XC6103B221MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26P	ec	XC6103B222MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26R	ec	XC6103B223MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26S	ec	XC6103B224MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26T	-	TK71426S	LVR-IC	LDO, 2.6V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
26T	ec	XC6103B225MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26U	ec	XC6103B226MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26V	ec	XC6103B227MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26X	ec	XC6103B228MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26Y	ec	XC6103B229MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
26Z	ec	XC6103B230MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27	-	R1223N302E	DC-DC-IC	PWM/VFM step-down, +CE, 3V±2%, 300kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
27	-	RN5RF27AA	LVR-IC	LRip, -CE, 2.7V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
27	-	RN5RZ27AA	LVR-IC	LDO, LN, 2.7V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
27	-	XC62EP2702MR-G	LVR-IC	LDO, boosted, 2.7V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
27	ea	XC62ER2702MR-G	LVR-IC	LDO, boosted, 2.7V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
27-	-	XC62HR2702MR-G	LVR-IC	LDO, 2.7V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
270	ej	XC6103B331MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
270AC	-	BL8509-270ACRN	Vdet-IC	2.7V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
270AC	-	LC9009CB5TR270AC	Vdet-IC	2.7V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
270AN	-	BL8509-270ANRN	Vdet-IC	2.7V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
270AN	-	LC9009CB5TR270AN	Vdet-IC	2.7V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
270BC	-	BL8509-270BCRN	Vdet-IC	2.7V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
270BC	-	LC9009CB5TR270BC	Vdet-IC	2.7V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
270BN	-	BL8509-270BNRN	Vdet-IC	2.7V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
270BN	-	LC9009CB5TR270BN	Vdet-IC	2.7V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
270CC	-	BL8509-270CCRN	Vdet-IC	2.7V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
270CC	-	LC9009CB5TR270CC	Vdet-IC	2.7V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
270CN	-	BL8509-270CNRN	Vdet-IC	2.7V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
270CN	-	LC9009CB5TR270CN	Vdet-IC	2.7V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
270DC	-	BL8509-270DCRN	Vdet-IC	2.7V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
270DC	-	LC9009CB5TR270DC	Vdet-IC	2.7V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
270DN	-	BL8509-270DNRN	Vdet-IC	2.7V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
270DN	-	LC9009CB5TR270DN	Vdet-IC	2.7V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
270EC	-	BL8509-270ECRN	Vdet-IC	2.7V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
270EC	-	LC9009CB5TR270EC	Vdet-IC	2.7V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
270EN	-	BL8509-270ENRN	Vdet-IC	2.7V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
270EN	-	LC9009CB5TR270EN	Vdet-IC	2.7V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
270FC	-	BL8509-270FCRN	Vdet-IC	2.7V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
270FC	-	LC9009CB5TR270FC	Vdet-IC	2.7V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
270FN	-	BL8509-270FNRN	Vdet-IC	2.7V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
270FN	-	LC9009CB5TR270FN	Vdet-IC	2.7V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
270GC	-	BL8509-270GCRN	Vdet-IC	2.7V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
270GC	-	LC9009CB5TR270GC	Vdet-IC	2.7V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
270GN	-	BL8509-270GNRN	Vdet-IC	2.7V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
270GN	-	LC9009CB5TR270GN	Vdet-IC	2.7V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
271	ej	XC6103B332MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
272	ej	XC6103B333MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
273	ej	XC6103B334MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
274	ej	XC6103B335MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
275	ej	XC6103B336MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
276	ej	XC6103B337MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
277	ej	XC6103B338MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
278	ej	XC6103B339MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
279	ej	XC6103B340MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27A	-	AAT60027A-S5	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
27A	-	KIC3210T-027	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	TSV	28vrx	VR7	6l	Kec
27A	-	MAZK270D	Z-diode	Quad, 27V, Zzt=2Ω (2mA), 200mW	SOT-23-5	28	D16	6a	Pan
27A	ej	XC6103B341MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27-A	-	UTC8127-A	Vdet-IC	2.7V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
27B	-	AAT60027B-S5	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
27B	-	KIC3210T-275	LVR-IC	LDO, 2.75V±1%, 150mA, +CE	TSV	28vrx	VR7	6l	Kec
27B	ej	XC6103B342MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27-B	-	UTC8127-B	Vdet-IC	2.7V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
27C	-	AAT60027C-S5	Vdet-IC	2.7V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
27C	ej	XC6103B343MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27D	-	AAT60027D-S5	Vdet-IC	2.7V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
27D	ej	XC6103B344MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27E	ej	XC6103B345MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27F	ec	XC6103B316MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27F	ej	XC6103B346MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27H	ec	XC6103B317MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27H	ej	XC6103B347MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27K	-	TK71727S	LVR-IC	LDO, 2.7V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
27K	ec	XC6103B318MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27K	ej	XC6103B348MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27L	-	TK71627ASCL	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
27L	ec	XC6103B319MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27L	ej	XC6103B349MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27M	ec	XC6103B320MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27M	ej	XC6103B350MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27N	ec	XC6103B321MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27P	ec	XC6103B322MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27R	ec	XC6103B323MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27S	ec	XC6103B324MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27T	-	TK71427S	LVR-IC	LDO, 2.7V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
27T	ec	XC6103B325MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27U	-	TK61027S	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Tok
27U	ec	XC6103B326MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27V	ec	XC6103B327MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27X	ec	XC6103B328MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27Y	ec	XC6103B329MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
27Z	ec	XC6103B330MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28	-	R1223N332E	DC-DC-IC	PWM/VFM step-down, +CE, 3.3V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
28	-	RN5RF28AA	LVR-IC	LRip, -CE, 2.8V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
28	-	RN5RZ28AA	LVR-IC	LDO, LN, 2.8V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
28	-	XC62EP2802MR-G	LVR-IC	LDO, boosted, 2.8V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
28	ea	XC62ER2802MR-G	LVR-IC	LDO, boosted, 2.8V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
28-	-	XC62HR2802MR-G	LVR-IC	LDO, 2.8V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
280	ej	XC6103B431MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
280AC	-	BL8509-280ACRN	Vdet-IC	2.8V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
280AC	-	LC9009CB5TR280AC	Vdet-IC	2.8V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
280AN	-	BL8509-280ANRN	Vdet-IC	2.8V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
280AN	-	LC9009CB5TR280AN	Vdet-IC	2.8V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
280BC	-	BL8509-280BCRN	Vdet-IC	2.8V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
280BC	-	LC9009CB5TR280BC	Vdet-IC	2.8V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
280BN	-	BL8509-280BNRN	Vdet-IC	2.8V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
280BN	-	LC9009CB5TR280BN	Vdet-IC	2.8V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
280CC	-	BL8509-280CCRN	Vdet-IC	2.8V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
280CC	-	LC9009CB5TR280CC	Vdet-IC	2.8V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
280CN	-	BL8509-280CNRN	Vdet-IC	2.8V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
280CN	-	LC9009CB5TR280CN	Vdet-IC	2.8V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
280DC	-	BL8509-280DCRN	Vdet-IC	2.8V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
280DC	-	LC9009CB5TR280DC	Vdet-IC	2.8V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
280DN	-	BL8509-280DNRN	Vdet-IC	2.8V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
280DN	-	LC9009CB5TR280DN	Vdet-IC	2.8V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
280EC	-	BL8509-280ECRN	Vdet-IC	2.8V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
280EC	-	LC9009CB5TR280EC	Vdet-IC	2.8V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
280EN	-	BL8509-280ENRN	Vdet-IC	2.8V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
280EN	-	LC9009CB5TR280EN	Vdet-IC	2.8V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
280FC	-	BL8509-280FCRN	Vdet-IC	2.8V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
280FC	-	LC9009CB5TR280FC	Vdet-IC	2.8V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
280FN	-	BL8509-280FNRN	Vdet-IC	2.8V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
280FN	-	LC9009CB5TR280FN	Vdet-IC	2.8V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
280GC	-	BL8509-280GCRN	Vdet-IC	2.8V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
280GC	-	LC9009CB5TR280GC	Vdet-IC	2.8V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
280GN	-	BL8509-280GNRN	Vdet-IC	2.8V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
280GN	-	LC9009CB5TR280GN	Vdet-IC	2.8V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
281	ej	XC6103B432MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
282	ej	XC6103B433MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
283	ej	XC6103B434MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
284	ej	XC6103B435MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
285	ej	XC6103B436MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
286	ej	XC6103B437MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
287	ej	XC6103B438MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
288	ej	XC6103B439MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
289	ej	XC6103B440MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28A	-	AAT60028A-S5	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
28A	-	AP6213A-15NHFGP	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28A	-	AP6213A-15NHFPP	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
28A	-	KIC3210T-028	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	TSV	28vrx	VR7	6l	Kec
28A	eb	AP6213A-15NHFGA	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28A	eb	AP6213A-15NHFPA	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
28A	ec	AP6213A-15NHFGA1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28A	ec	AP6213A-15NHFPA1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
28A	eh	AP6213A-15NHFGP1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28A	eh	AP6213A-15NHFPP1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
28A	ej	XC6103B441MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28-A	-	UTC8128-A	Vdet-IC	2.8V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
28B	-	AAT60028B-S5	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
28B	-	AP6213A-15NLFGP	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28B	-	AP6213A-15NLFPP	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
28B	-	KIC3210T-285	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	TSV	28vrx	VR7	6l	Kec
28B	eb	AP6213A-15NLFGA	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28B	eb	AP6213A-15NLFPA	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
28B	ec	AP6213A-15NLFGA1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28B	ec	AP6213A-15NLFPA1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
28B	eh	AP6213A-15NLFGP1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28B	eh	AP6213A-15NLFPP1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
28B	ej	XC6103B442MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28-B	-	UTC8128-B	Vdet-IC	2.8V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
28C	-	AAT60028C-S5	Vdet-IC	2.8V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
28C	-	AP6213A-15NHNGP	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28C	-	AP6213A-15NHNPP	LVR-IC	LDO, 1.5V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
28C	eb	AP6213A-15NHNGA	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28C	eb	AP6213A-15NHNPA	LVR-IC	LDO, 1.5V±2%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
28C	ec	AP6213A-15NHNGA1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28C	ec	AP6213A-15NHNPA1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
28C	eh	AP6213A-15NHNGP1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28C	eh	AP6213A-15NHNPP1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
28C	ej	XC6103B443MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28D	-	AAT60028D-S5	Vdet-IC	2.8V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
28D	-	AP6213A-15NLNGP	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28D	-	AP6213A-15NLNPP	LVR-IC	LDO, 1.5V±2%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
28D	eb	AP6213A-15NLNGA	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28D	eb	AP6213A-15NLNPA	LVR-IC	LDO, 1.5V±2%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
28D	ec	AP6213A-15NLNGA1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28D	ec	AP6213A-15NLNPA1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
28D	eh	AP6213A-15NLNGP1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28D	eh	AP6213A-15NLNPP1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
28D	ej	XC6103B444MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28E	-	AP6213A-15UHFGP	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28E	-	AP6213A-15UHFPP	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
28E	eb	AP6213A-15UHFGA	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28E	eb	AP6213A-15UHFPA	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
28E	ec	AP6213A-15UHFGA1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28E	ec	AP6213A-15UHFPA1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
28E	eh	AP6213A-15UHFGP1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28E	eh	AP6213A-15UHFPP1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
28E	ej	XC6103B445MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28F	-	AP6213A-15ULFGP	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28F	-	AP6213A-15ULFPP	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
28F	eb	AP6213A-15ULFGA	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28F	eb	AP6213A-15ULFPA	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
28F	ec	AP6213A-15ULFGA1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28F	ec	AP6213A-15ULFPA1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
28F	ec	XC6103B416MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28F	eh	AP6213A-15ULFGP1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28F	eh	AP6213A-15ULFPP1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
28F	ej	XC6103B446MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28G	-	AP6213A-15UHNGP	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28G	-	AP6213A-15UHNPP	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
28G	eb	AP6213A-15UHNGA	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28G	eb	AP6213A-15UHNPA	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
28G	ec	AP6213A-15UHNGA1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28G	ec	AP6213A-15UHNPA1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
28G	eh	AP6213A-15UHNGP1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28G	eh	AP6213A-15UHNPP1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
28H	-	AP6213A-15ULNGP	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28H	-	AP6213A-15ULNPP	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
28H	eb	AP6213A-15ULNGA	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28H	eb	AP6213A-15ULNPA	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
28H	ec	AP6213A-15ULNGA1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28H	ec	AP6213A-15ULNPA1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
28H	ec	XC6103B417MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28H	eh	AP6213A-15ULNGP1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28H	eh	AP6213A-15ULNPP1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
28H	ej	XC6103B447MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28J	-	AP6213A-15DHFGP	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28J	-	AP6213A-15DHFPP	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
28J	eb	AP6213A-15DHFGA	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28J	eb	AP6213A-15DHFPA	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
28J	ec	AP6213A-15DHFGA1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28J	ec	AP6213A-15DHFPA1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
28J	eh	AP6213A-15DHFGP1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28J	eh	AP6213A-15DHFPP1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
28K	-	AP6213A-15DLFGP	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28K	-	AP6213A-15DLFPP	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
28K	-	TK71728S	LVR-IC	LDO, 2.8V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
28K	eb	AP6213A-15DLFGA	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28K	eb	AP6213A-15DLFPA	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
28K	ec	AP6213A-15DLFGA1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28K	ec	AP6213A-15DLFPA1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
28K	ec	XC6103B418MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28K	eh	AP6213A-15DLFGP1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28K	eh	AP6213A-15DLFPP1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
28K	ej	XC6103B448MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28L	-	AP6213A-15DHNGP	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28L	-	AP6213A-15DHNPP	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
28L	-	TK71628ASCL	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
28L	eb	AP6213A-15DHNGA	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28L	eb	AP6213A-15DHNPA	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
28L	ec	AP6213A-15DHNGA1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28L	ec	AP6213A-15DHNPA1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
28L	ec	XC6103B419MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28L	eh	AP6213A-15DHNGP1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28L	eh	AP6213A-15DHNPP1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
28L	ej	XC6103B449MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28M	-	AP6213A-15DLNGP	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28M	-	AP6213A-15DLNPP	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
28M	eb	AP6213A-15DLNGA	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28M	eb	AP6213A-15DLNPA	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
28M	ec	AP6213A-15DLNGA1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
28M	ec	AP6213A-15DLNPA1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
28M	ec	XC6103B420MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28M	eh	AP6213A-15DLNGP1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
28M	eh	AP6213A-15DLNPP1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
28M	ej	XC6103B450MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28N	ec	XC6103B421MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28P	ec	XC6103B422MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28R	ec	XC6103B423MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28S	ec	XC6103B424MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28T	-	TK71428S	LVR-IC	LDO, 2.8V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
28T	ec	XC6103B425MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28U	ec	XC6103B426MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28V	ec	XC6103B427MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28X	ec	XC6103B428MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28Y	ec	XC6103B429MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
28Z	ec	XC6103B430MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29	-	R1223N502E	DC-DC-IC	PWM/VFM step-down, +CE, 5V±2%, 300kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
29	-	RN5RF29AA	LVR-IC	LRip, -CE, 2.9V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
29	-	RN5RZ29AA	LVR-IC	LDO, LN, 2.9V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
29	-	XC62EP2902MR-G	LVR-IC	LDO, boosted, 2.9V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
29	ea	XC62ER2902MR-G	LVR-IC	LDO, boosted, 2.9V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
29-	-	XC62HR2902MR-G	LVR-IC	LDO, 2.9V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
290	ej	XC6103B531MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
290AC	-	BL8509-290ACRN	Vdet-IC	2.9V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
290AC	-	LC9009CB5TR290AC	Vdet-IC	2.9V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
290AN	-	BL8509-290ANRN	Vdet-IC	2.9V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
290AN	-	LC9009CB5TR290AN	Vdet-IC	2.9V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
290BC	-	BL8509-290BCRN	Vdet-IC	2.9V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
290BC	-	LC9009CB5TR290BC	Vdet-IC	2.9V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
290BN	-	BL8509-290BNRN	Vdet-IC	2.9V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
290BN	-	LC9009CB5TR290BN	Vdet-IC	2.9V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
290CC	-	BL8509-290CCRN	Vdet-IC	2.9V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
290CC	-	LC9009CB5TR290CC	Vdet-IC	2.9V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
290CN	-	BL8509-290CNRN	Vdet-IC	2.9V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
290CN	-	LC9009CB5TR290CN	Vdet-IC	2.9V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
290DC	-	BL8509-290DCRN	Vdet-IC	2.9V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
290DC	-	LC9009CB5TR290DC	Vdet-IC	2.9V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
290DN	-	BL8509-290DNRN	Vdet-IC	2.9V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
290DN	-	LC9009CB5TR290DN	Vdet-IC	2.9V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
290EC	-	BL8509-290ECRN	Vdet-IC	2.9V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
290EC	-	LC9009CB5TR290EC	Vdet-IC	2.9V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
290EN	-	BL8509-290ENRN	Vdet-IC	2.9V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
290EN	-	LC9009CB5TR290EN	Vdet-IC	2.9V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
290FC	-	BL8509-290FCRN	Vdet-IC	2.9V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
290FC	-	LC9009CB5TR290FC	Vdet-IC	2.9V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
290FN	-	BL8509-290FNRN	Vdet-IC	2.9V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
290FN	-	LC9009CB5TR290FN	Vdet-IC	2.9V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
290GC	-	BL8509-290GCRN	Vdet-IC	2.9V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
290GC	-	LC9009CB5TR290GC	Vdet-IC	2.9V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
290GN	-	BL8509-290GNRN	Vdet-IC	2.9V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
290GN	-	LC9009CB5TR290GN	Vdet-IC	2.9V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
291	ej	XC6103B532MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
292	ej	XC6103B533MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
293	ej	XC6103B534MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
293AC	-	LC9009CB5TR293AC	Vdet-IC	2.93V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
293AN	-	LC9009CB5TR293AN	Vdet-IC	2.93V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
293BC	-	LC9009CB5TR293BC	Vdet-IC	2.93V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
293BN	-	LC9009CB5TR293BN	Vdet-IC	2.93V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
293CC	-	LC9009CB5TR293CC	Vdet-IC	2.93V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
293CN	-	LC9009CB5TR293CN	Vdet-IC	2.93V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
293DC	-	LC9009CB5TR293DC	Vdet-IC	2.93V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
293DN	-	LC9009CB5TR293DN	Vdet-IC	2.93V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
293EC	-	LC9009CB5TR293EC	Vdet-IC	2.93V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
293EN	-	LC9009CB5TR293EN	Vdet-IC	2.93V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
293FC	-	LC9009CB5TR293FC	Vdet-IC	2.93V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
293FN	-	LC9009CB5TR293FN	Vdet-IC	2.93V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
293GC	-	LC9009CB5TR293GC	Vdet-IC	2.93V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
293GN	-	LC9009CB5TR293GN	Vdet-IC	2.93V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
294	ej	XC6103B535MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
295	ej	XC6103B536MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
296	ej	XC6103B537MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
297	ej	XC6103B538MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
298	ej	XC6103B539MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
299	ej	XC6103B540MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29A	-	AAT60029A-S5	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
29A	-	KIC3210T-029	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	TSV	28vrx	VR7	6l	Kec
29A	ej	XC6103B541MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29-A	-	UTC8129-A	Vdet-IC	3.9V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
29B	-	AAT60029B-S5	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
29B	ej	XC6103B542MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29-B	-	UTC8129-B	Vdet-IC	3.9V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
29C	-	AAT60029C-S5	Vdet-IC	2.9V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
29C	ej	XC6103B543MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29D	-	AAT60029D-S5	Vdet-IC	2.9V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
29D	ej	XC6103B544MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29E	ej	XC6103B545MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29F	ec	XC6103B516MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29F	ej	XC6103B546MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29H	ec	XC6103B517MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29H	ej	XC6103B547MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29K	-	TK71729S	LVR-IC	LDO, 2.9V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
29K	ec	XC6103B518MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29K	ej	XC6103B548MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29L	-	TK71629ASCL	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
29L	ec	XC6103B519MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29L	ej	XC6103B549MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29M	ec	XC6103B520MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29M	ej	XC6103B550MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29N	ec	XC6103B521MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29P	ec	XC6103B522MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29R	ec	XC6103B523MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29S	ec	XC6103B524MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29T	-	TK71429S	LVR-IC	LDO, 2.9V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
29T	ec	XC6103B525MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29U	ec	XC6103B526MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29V	ec	XC6103B527MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29X	ec	XC6103B528MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29Y	ec	XC6103B529MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
29Z	ec	XC6103B530MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2A0	-	XC2211A1200M	Op-IC	µPower, ±0.6..±5V, Icco=100µA, 550kHz, 0.5V/µs	SOT-25	28opb	OP1	6g	Tor
2A0	ej	XC6103B631MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2A1	ej	XC6103B632MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2A2	ej	XC6103B633MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2A3	ej	XC6103B634MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2A4	ej	XC6103B635MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2A5	ej	XC6103B636MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2A6	ej	XC6103B637MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2A7	ej	XC6103B638MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2A8	-	XC9235F08CMR-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2A8	ej	XC6103B639MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2A9	-	XC9235F09CMR-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2A9	ej	XC6103B640MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AA	-	AP6213A-18NHFGP	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AA	-	AP6213A-18NHFPP	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2AA	eb	AP6213A-18NHFGA	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AA	eb	AP6213A-18NHFPA	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2AA	ec	AP6213A-18NHFGA1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AA	ec	AP6213A-18NHFPA1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2AA	eh	AP6213A-18NHFGP1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2AA	eh	AP6213A-18NHFPP1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2AA	ej	XC6103B641MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AB	-	AP6213A-18NLFGP	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AB	-	AP6213A-18NLFPP	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2AB	eb	AP6213A-18NLFGA	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AB	eb	AP6213A-18NLFPA	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2AB	ec	AP6213A-18NLFGA1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AB	ec	AP6213A-18NLFPA1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2AB	eh	AP6213A-18NLFGP1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AB	eh	AP6213A-18NLFPP1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2AB	ej	XC6103B642MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AC	-	AP6213A-18NHNGP	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AC	-	AP6213A-18NHNPP	LVR-IC	LDO, 1.8V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2AC	eb	AP6213A-18NHNGA	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AC	eb	AP6213A-18NHNPA	LVR-IC	LDO, 1.8V±2%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2AC	ec	AP6213A-18NHNGA1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AC	ec	AP6213A-18NHNPA1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2AC	eh	AP6213A-18NHNGP1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AC	eh	AP6213A-18NHNPP1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2AC	ej	XC6103B643MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AD	-	AP6213A-18NLNGP	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AD	-	AP6213A-18NLNPP	LVR-IC	LDO, 1.8V±2%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2AD	eb	AP6213A-18NLNGA	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AD	eb	AP6213A-18NLNPA	LVR-IC	LDO, 1.8V±2%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2AD	ec	AP6213A-18NLNGA1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AD	ec	AP6213A-18NLNPA1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2AD	eh	AP6213A-18NLNGP1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AD	eh	AP6213A-18NLNPP1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2AD	ej	XC6103B644MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AE	-	AP6213A-18UHFGP	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AE	-	AP6213A-18UHFPP	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2AE	eb	AP6213A-18UHFGA	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AE	eb	AP6213A-18UHFPA	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2AE	ec	AP6213A-18UHFGA1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AE	ec	AP6213A-18UHFPA1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2AE	eh	AP6213A-18UHFGP1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AE	eh	AP6213A-18UHFPP1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2AE	ej	XC6103B645MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AF	-	AP6213A-18ULFGP	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AF	-	AP6213A-18ULFPP	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2AF	eb	AP6213A-18ULFGA	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AF	eb	AP6213A-18ULFPA	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2AF	ec	AP6213A-18ULFGA1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AF	ec	AP6213A-18ULFPA1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2AF	ec	XC6103B616MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AF	eh	AP6213A-18ULFGP1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AF	eh	AP6213A-18ULFPP1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2AF	ej	XC6103B646MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AG	-	AP6213A-18UHNGP	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AG	-	AP6213A-18UHNPP	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2AG	eb	AP6213A-18UHNGA	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AG	eb	AP6213A-18UHNPA	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2AG	ec	AP6213A-18UHNGA1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AG	ec	AP6213A-18UHNPA1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2AG	eh	AP6213A-18UHNGP1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AG	eh	AP6213A-18UHNPP1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2AH	-	AP6213A-18ULNGP	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AH	-	AP6213A-18ULNPP	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2AH	eb	AP6213A-18ULNGA	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AH	eb	AP6213A-18ULNPA	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2AH	ec	AP6213A-18ULNGA1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AH	ec	AP6213A-18ULNPA1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2AH	ec	XC6103B617MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AH	eh	AP6213A-18ULNGP1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AH	eh	AP6213A-18ULNPP1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2AH	ej	XC6103B647MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AJ	-	AP6213A-18DHFGP	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AJ	-	AP6213A-18DHFPP	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2AJ	eb	AP6213A-18DHFGA	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AJ	eb	AP6213A-18DHFPA	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2AJ	ec	AP6213A-18DHFGA1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AJ	ec	AP6213A-18DHFPA1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2AJ	eh	AP6213A-18DHFGP1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AJ	eh	AP6213A-18DHFPP1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2AK	-	AP6213A-18DLFGP	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AK	-	AP6213A-18DLFPP	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2AK	eb	AP6213A-18DLFGA	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AK	eb	AP6213A-18DLFPA	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2AK	ec	AP6213A-18DLFGA1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AK	ec	AP6213A-18DLFPA1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2AK	ec	XC6103B618MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AK	eh	AP6213A-18DLFGP1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AK	eh	AP6213A-18DLFPP1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2AK	ej	XC6103B648MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AL	-	AP6213A-18DHNGP	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AL	-	AP6213A-18DHNPP	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2AL	-	XC9235F0LCMR-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2AL	eb	AP6213A-18DHNGA	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AL	eb	AP6213A-18DHNPA	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2AL	ec	AP6213A-18DHNGA1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AL	ec	AP6213A-18DHNPA1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2AL	ec	XC6103B619MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AL	eh	AP6213A-18DHNGP1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AL	eh	AP6213A-18DHNPP1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2AL	ej	XC6103B649MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AM	-	AP6213A-18DLNGP	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AM	-	AP6213A-18DLNPP	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2AM	-	XC9235F0MCMR-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2AM	eb	AP6213A-18DLNGA	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AM	eb	AP6213A-18DLNPA	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2AM	ec	AP6213A-18DLNGA1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2AM	ec	AP6213A-18DLNPA1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2AM	ec	XC6103B620MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AM	eh	AP6213A-18DLNGP1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2AM	eh	AP6213A-18DLNPP1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2AM	ej	XC6103B650MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AN	ec	XC6103B621MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AP	ec	XC6103B622MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AR	ec	XC6103B623MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AS	ec	XC6103B624MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AT	ec	XC6103B625MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AU	ec	XC6103B626MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AV	ec	XC6103B627MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AX	ec	XC6103B628MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AY	ec	XC6103B629MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2AZ	ec	XC6103B630MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
2B	-	R3111N121A	Vdet-IC	1.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
2B	-	RN5RL22AA	LVR-IC	2.2V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
2B	eu	RN5VD12CA	Vdet-IC	1.2V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
2B0	-	TAR5SB20	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
2B0	-	XC9235F10CMR-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2B0	ej	XC6103C231MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2B1	-	TAR5SB21	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
2B1	-	XC9235F11CMR-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2B1	ej	XC6103C232MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2B2	-	TAR5SB22	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
2B2	-	XC9235F12CMR-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2B2	ej	XC6103C233MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2B3	-	TAR5SB23	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
2B3	-	XC9235F13CMR-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2B3	ej	XC6103C234MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2B4	-	TAR5SB24	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
2B4	-	XC9235F14CMR-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2B4	ej	XC6103C235MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2B5	-	TAR5SB25	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
2B5	-	XC9235F15CMR-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2B5	ej	XC6103C236MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2B6	-	TAR5SB26	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
2B6	-	XC9235F16CMR-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2B6	ej	XC6103C237MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2B7	-	TAR5SB27	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
2B7	-	XC9235F17CMR-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2B7	ej	XC6103C238MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2B8	-	TAR5SB28	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
2B8	-	XC9235F18CMR-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2B8	ej	XC6103C239MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2B9	-	TAR5SB29	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
2B9	-	XC9235F19CMR-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2B9	ej	XC6103C240MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BA	-	XC9235F1ACMR-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2BA	ej	XC6103C241MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BB	-	XC9235F1BCMR-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2BB	ej	XC6103C242MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BC	-	XC9235F1CCMR-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2BC	ej	XC6103C243MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BD	-	XC9235F1DCMR-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2BD	ej	XC6103C244MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BE	-	XC9235F1ECMR-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2BE	ej	XC6103C245MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BF	-	XC9235F1FCMR-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2BF	ec	XC6103C216MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BF	ej	XC6103C246MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BH	-	XC9235F1HCMR-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2BH	ec	XC6103C217MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BH	ej	XC6103C247MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BK	-	XC9235F1KCMR-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2BK	ec	XC6103C218MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BK	ej	XC6103C248MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BL	-	XC9235F1LCMR-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2BL	ec	XC6103C219MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BL	ej	XC6103C249MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BM	-	XC9235F1MCMR-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2BM	ec	XC6103C220MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BM	ej	XC6103C250MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BN	ec	XC6103C221MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BP	ec	XC6103C222MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BR	ec	XC6103C223MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BS	ec	XC6103C224MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BT	ec	XC6103C225MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BU	ec	XC6103C226MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BV	ec	XC6103C227MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BX	ec	XC6103C228MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BY	ec	XC6103C229MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2BZ	ec	XC6103C230MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2C	-	R3111N221A	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
2C	-	RN5RL32AA	LVR-IC	3.2V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
2C	eu	RN5VD22CA	Vdet-IC	2.2V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
2C0	-	XC9235F20CMR-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2C0	ej	XC6103C331MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2C1	-	XC9235F21CMR-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2C1	ej	XC6103C332MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2C2	-	XC9235F22CMR-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2C2	ej	XC6103C333MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2C3	-	XC9235F23CMR-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2C3	ej	XC6103C334MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2C4	-	XC9235F24CMR-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2C4	ej	XC6103C335MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2C5	-	XC9235F25CMR-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2C5	ej	XC6103C336MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2C6	-	XC9235F26CMR-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2C6	ej	XC6103C337MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2C7	-	XC9235F27CMR-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2C7	ej	XC6103C338MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2C8	-	XC9235F28CMR-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2C8	ej	XC6103C339MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2C9	-	XC9235F29CMR-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2C9	ej	XC6103C340MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CA	-	XC9235F2ACMR-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2CA	ej	XC6103C341MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CB	-	XC9235F2BCMR-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2CB	ej	XC6103C342MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CC	-	XC9235F2CCMR-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2CC	ej	XC6103C343MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CD	-	XC9235F2DCMR-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2CD	ej	XC6103C344MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CE	-	XC9235F2ECMR-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2CE	ej	XC6103C345MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CF	-	XC9235F2FCMR-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2CF	ec	XC6103C316MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CF	ej	XC6103C346MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CH	-	XC9235F2HCMR-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2CH	ec	XC6103C317MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CH	ej	XC6103C347MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CK	-	XC9235F2KCMR-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2CK	ec	XC6103C318MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CK	ej	XC6103C348MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CL	-	XC9235F2LCMR-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2CL	ec	XC6103C319MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CL	ej	XC6103C349MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CM	-	XC9235F2MCMR-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2CM	ec	XC6103C320MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CM	ej	XC6103C350MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CN	ec	XC6103C321MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CP	ec	XC6103C322MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CR	ec	XC6103C323MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CS	ec	XC6103C324MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CT	ec	XC6103C325MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CU	ec	XC6103C326MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CV	ec	XC6103C327MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CX	ec	XC6103C328MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CY	ec	XC6103C329MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2CZ	ec	XC6103C330MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2D	-	R3111N321A	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
2D	-	RN5RL42AA	LVR-IC	4.2V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
2D	eu	RN5VD32CA	Vdet-IC	3.2V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
2D0	-	XC9235F30CMR-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2D0	ej	XC6103C431MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2D1	-	XC9235F31CMR-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2D1	ej	XC6103C432MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2D2	-	XC9235F32CMR-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2D2	ej	XC6103C433MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2D3	-	XC9235F33CMR-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2D3	ej	XC6103C434MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2D4	-	XC9235F34CMR-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2D4	ej	XC6103C435MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2D5	-	XC9235F35CMR-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2D5	ej	XC6103C436MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2D6	-	XC9235F36CMR-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2D6	ej	XC6103C437MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2D7	-	XC9235F37CMR-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2D7	ej	XC6103C438MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2D8	-	XC9235F38CMR-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2D8	ej	XC6103C439MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2D9	-	XC9235F39CMR-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2D9	ej	XC6103C440MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DA	-	XC9235F3ACMR-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2DA	ej	XC6103C441MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DB	-	XC9235F3BCMR-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2DB	ej	XC6103C442MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DC	-	XC9235F3CCMR-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2DC	ej	XC6103C443MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DD	-	XC9235F3DCMR-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2DD	ej	XC6103C444MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DE	-	XC9235F3ECMR-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2DE	ej	XC6103C445MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DF	-	XC9235F3FCMR-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2DF	ec	XC6103C416MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DF	ej	XC6103C446MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DH	-	XC9235F3HCMR-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2DH	ec	XC6103C417MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2DH	ej	XC6103C447MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DK	-	XC9235F3KCMR-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2DK	ec	XC6103C418MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DK	ej	XC6103C448MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DL	-	XC9235F3LCMR-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2DL	ec	XC6103C419MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DL	ej	XC6103C449MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DM	-	XC9235F3MCMR-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2DM	ec	XC6103C420MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DM	ej	XC6103C450MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DN	ec	XC6103C421MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DP	ec	XC6103C422MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DR	ec	XC6103C423MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DS	ec	XC6103C424MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DT	ec	XC6103C425MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DU	ec	XC6103C426MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DV	ec	XC6103C427MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DX	ec	XC6103C428MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DY	ec	XC6103C429MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2DZ	ec	XC6103C430MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2E	-	R3111N421A	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
2E	-	RN5RL52AA	LVR-IC	5.2V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
2E	eu	RN5VD42CA	Vdet-IC	4.2V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
2E0	-	XC9235F40CMR-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2E0	ej	XC6103C531MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2E1	ej	XC6103C532MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2E2	ej	XC6103C533MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2E3	ej	XC6103C534MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2E4	ej	XC6103C535MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2E5	ej	XC6103C536MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2E6	ej	XC6103C537MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2E7	ej	XC6103C538MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2E8	ej	XC6103C539MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2E9	ej	XC6103C540MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EA	-	AP6213A-22NHFGP	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EA	-	AP6213A-22NHFPP	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2EA	eb	AP6213A-22NHFGA	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EA	eb	AP6213A-22NHFPA	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2EA	ec	AP6213A-22NHFGA1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EA	ec	AP6213A-22NHFPA1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2EA	eh	AP6213A-22NHFGP1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EA	eh	AP6213A-22NHFPP1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2EA	ej	XC6103C541MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EB	-	AP6213A-22NLFGP	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EB	-	AP6213A-22NLFPP	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2EB	eb	AP6213A-22NLFGA	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EB	eb	AP6213A-22NLFPA	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2EB	ec	AP6213A-22NLFGA1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EB	ec	AP6213A-22NLFPA1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2EB	eh	AP6213A-22NLFGP1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EB	eh	AP6213A-22NLFPP1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2EB	ej	XC6103C542MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EC	-	AP6213A-22NHNGP	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EC	-	AP6213A-22NHNPP	LVR-IC	LDO, 2.2V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2EC	eb	AP6213A-22NHNGA	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EC	eb	AP6213A-22NHNPA	LVR-IC	LDO, 2.2V±2%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2EC	ec	AP6213A-22NHNGA1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EC	ec	AP6213A-22NHNPA1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2EC	eh	AP6213A-22NHNGP1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EC	eh	AP6213A-22NHNPP1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2EC	ej	XC6103C543MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2ED	-	AP6213A-22NLNGP	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ED	-	AP6213A-22NLNPP	LVR-IC	LDO, 2.2V±2%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2ED	eb	AP6213A-22NLNGA	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ED	eb	AP6213A-22NLNPA	LVR-IC	LDO, 2.2V±2%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2ED	ec	AP6213A-22NLNGA1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ED	ec	AP6213A-22NLNPA1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2ED	eh	AP6213A-22NLNGP1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ED	eh	AP6213A-22NLNPP1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2ED	ej	XC6103C544MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2EE	-	AP6213A-22UHFGP	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EE	-	AP6213A-22UHFPP	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2EE	eb	AP6213A-22UHFGA	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EE	eb	AP6213A-22UHFPA	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2EE	ec	AP6213A-22UHFGA1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EE	ec	AP6213A-22UHFPA1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2EE	eh	AP6213A-22UHFGP1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EE	eh	AP6213A-22UHFPP1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2EE	ej	XC6103C545MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EF	-	AP6213A-22ULFGP	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EF	-	AP6213A-22ULFPP	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2EF	eb	AP6213A-22ULFGA	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EF	eb	AP6213A-22ULFPA	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2EF	ec	AP6213A-22ULFGA1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EF	ec	AP6213A-22ULFPA1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2EF	ec	XC6103C516MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EF	eh	AP6213A-22ULFGP1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EF	eh	AP6213A-22ULFPP1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2EF	ej	XC6103C546MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EG	-	AP6213A-22UHNGP	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EG	-	AP6213A-22UHNPP	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2EG	eb	AP6213A-22UHNGA	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EG	eb	AP6213A-22UHNPA	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2EG	ec	AP6213A-22UHNGA1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EG	ec	AP6213A-22UHNPA1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2EG	eh	AP6213A-22UHNGP1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EG	eh	AP6213A-22UHNPP1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2EH	-	AP6213A-22ULNGP	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EH	-	AP6213A-22ULNPP	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2EH	eb	AP6213A-22ULNGA	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EH	eb	AP6213A-22ULNPA	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2EH	ec	AP6213A-22ULNGA1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EH	ec	AP6213A-22ULNPA1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2EH	ec	XC6103C517MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EH	eh	AP6213A-22ULNGP1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EH	eh	AP6213A-22ULNPP1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2EH	ej	XC6103C547MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EJ	-	AP6213A-22DHFGP	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EJ	-	AP6213A-22DHFPP	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2EJ	eb	AP6213A-22DHFGA	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EJ	eb	AP6213A-22DHFPA	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2EJ	ec	AP6213A-22DHFGA1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EJ	ec	AP6213A-22DHFPA1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2EJ	eh	AP6213A-22DHFGP1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EJ	eh	AP6213A-22DHFPP1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2EK	-	AP6213A-22DLFGP	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EK	-	AP6213A-22DLFPP	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2EK	eb	AP6213A-22DLFGA	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EK	eb	AP6213A-22DLFPA	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2EK	ec	AP6213A-22DLFGA1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EK	ec	AP6213A-22DLFPA1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2EK	ec	XC6103C518MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EK	eh	AP6213A-22DLFGP1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EK	eh	AP6213A-22DLFPP1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2EK	ej	XC6103C548MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EL	-	AP6213A-22DHNGP	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EL	-	AP6213A-22DHNPP	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2EL	eb	AP6213A-22DHNGA	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EL	eb	AP6213A-22DHNPA	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2EL	ec	AP6213A-22DHNGA1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EL	ec	AP6213A-22DHNPA1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2EL	ec	XC6103C519MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EL	eh	AP6213A-22DHNGP1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EL	eh	AP6213A-22DHNPP1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2EL	ej	XC6103C549MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EM	-	AP6213A-22DLNGP	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2EM	-	AP6213A-22DLNPP	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2EM	eb	AP6213A-22DLNGA	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2EM	eb	AP6213A-22DLNPA	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2EM	ec	AP6213A-22DLNGA1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6ka	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2EM	ec	AP6213A-22DLNPA1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2EM	ec	XC6103C520MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EM	eh	AP6213A-22DLNGP1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6ka	Anw
2EM	eh	AP6213A-22DLNPP1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2EM	ej	XC6103C550MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EN	ec	XC6103C521MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EP	ec	XC6103C522MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2ER	ec	XC6103C523MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2ES	ec	XC6103C524MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2ET	ec	XC6103C525MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EU	ec	XC6103C526MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EV	ec	XC6103C527MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EX	ec	XC6103C528MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EY	ec	XC6103C529MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2EZ	ec	XC6103C530MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2F	-	R3111N521A	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
2F	eu	RN5VD52CA	Vdet-IC	5.2V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
2F0	ej	XC6103C631MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2F1	ej	XC6103C632MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2F2	ej	XC6103C633MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2F3	ej	XC6103C634MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2F4	ej	XC6103C635MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2F5	ej	XC6103C636MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2F6	ej	XC6103C637MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2F7	ej	XC6103C638MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2F8	-	XC9235F08DMR-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2F8	ej	XC6103C639MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2F9	-	XC9235F09DMR-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2F9	ej	XC6103C640MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FA	ej	XC6103C641MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FB	ej	XC6103C642MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FC	ej	XC6103C643MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FD	ej	XC6103C644MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FE	ej	XC6103C645MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FF	ec	XC6103C616MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FF	ej	XC6103C646MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FH	ec	XC6103C617MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FH	ej	XC6103C647MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FK	ec	XC6103C618MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FK	ej	XC6103C648MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FL	-	XC9235F0LDMR-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2FL	ec	XC6103C619MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FL	ej	XC6103C649MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FM	-	XC9235F0MDMR-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2FM	ec	XC6103C620MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FM	ej	XC6103C650MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FN	ec	XC6103C621MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FP	ec	XC6103C622MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FR	ec	XC6103C623MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FS	ec	XC6103C624MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FT	ec	XC6103C625MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FU	ec	XC6103C626MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FV	ec	XC6103C627MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FX	ec	XC6103C628MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FY	ec	XC6103C629MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2FZ	ec	XC6103C630MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
2GA	-	AP6213A-25NHFGP	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GA	-	AP6213A-25NHFPP	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2GA	eb	AP6213A-25NHFGA	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GA	eb	AP6213A-25NHFPA	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2GA	ec	AP6213A-25NHFGA1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GA	ec	AP6213A-25NHFPA1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2GA	eh	AP6213A-25NHFGP1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GA	eh	AP6213A-25NHFPP1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2GB	-	AP6213A-25NLFGP	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GB	-	AP6213A-25NLFPP	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2GB	eb	AP6213A-25NLFGA	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GB	eb	AP6213A-25NLFPA	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2GB	ec	AP6213A-25NLFGA1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GB	ec	AP6213A-25NLFPA1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2GB	eh	AP6213A-25NLFGP1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GB	eh	AP6213A-25NLFPP1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2GC	-	AP6213A-25NHNGP	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GC	-	AP6213A-25NHNPP	LVR-IC	LDO, 2.5V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2GC	eb	AP6213A-25NHNGA	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GC	eb	AP6213A-25NHNPA	LVR-IC	LDO, 2.5V±2%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2GC	ec	AP6213A-25NHNGA1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GC	ec	AP6213A-25NHNPA1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2GC	eh	AP6213A-25NHNGP1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GC	eh	AP6213A-25NHNPP1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2GD	-	AP6213A-25NLNGP	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GD	-	AP6213A-25NLNPP	LVR-IC	LDO, 2.5V±2%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2GD	eb	AP6213A-25NLNGA	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GD	eb	AP6213A-25NLNPA	LVR-IC	LDO, 2.5V±2%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2GD	ec	AP6213A-25NLNGA1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GD	ec	AP6213A-25NLNPA1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2GD	eh	AP6213A-25NLNGP1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GD	eh	AP6213A-25NLNPP1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2GE	-	AP6213A-25UHFGP	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GE	-	AP6213A-25UHFPP	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2GE	eb	AP6213A-25UHFGA	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GE	eb	AP6213A-25UHFPA	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2GE	ec	AP6213A-25UHFGA1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GE	ec	AP6213A-25UHFPA1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2GE	eh	AP6213A-25UHFGP1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GE	eh	AP6213A-25UHFPP1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2GF	-	AP6213A-25ULFGP	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GF	-	AP6213A-25ULFPP	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2GF	eb	AP6213A-25ULFGA	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GF	eb	AP6213A-25ULFPA	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2GF	ec	AP6213A-25ULFGA1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GF	ec	AP6213A-25ULFPA1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2GF	eh	AP6213A-25ULFGP1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GF	eh	AP6213A-25ULFPP1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2GG	-	AP6213A-25UHNGP	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GG	-	AP6213A-25UHNPP	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2GG	eb	AP6213A-25UHNGA	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GG	eb	AP6213A-25UHNPA	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2GG	ec	AP6213A-25UHNGA1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GG	ec	AP6213A-25UHNPA1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2GG	eh	AP6213A-25UHNGP1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GG	eh	AP6213A-25UHNPP1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2GH	-	AP6213A-25ULNGP	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GH	-	AP6213A-25ULNPP	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2GH	eb	AP6213A-25ULNGA	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GH	eb	AP6213A-25ULNPA	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2GH	ec	AP6213A-25ULNGA1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GH	ec	AP6213A-25ULNPA1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2GH	eh	AP6213A-25ULNGP1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GH	eh	AP6213A-25ULNPP1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2GJ	-	AP6213A-25DHFGP	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GJ	-	AP6213A-25DHFPP	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2GJ	eb	AP6213A-25DHFGA	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GJ	eb	AP6213A-25DHFPA	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2GJ	ec	AP6213A-25DHFGA1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GJ	ec	AP6213A-25DHFPA1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2GJ	eh	AP6213A-25DHFGP1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GJ	eh	AP6213A-25DHFPP1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2GK	-	AP6213A-25DLFGP	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GK	-	AP6213A-25DLFPP	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2GK	eb	AP6213A-25DLFGA	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GK	eb	AP6213A-25DLFPA	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2GK	ec	AP6213A-25DLFGA1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GK	ec	AP6213A-25DLFPA1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2GK	eh	AP6213A-25DLFGP1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GK	eh	AP6213A-25DLFPP1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2GL	-	AP6213A-25DHNGP	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GL	-	AP6213A-25DHNPP	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2GL	eb	AP6213A-25DHNGA	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GL	eb	AP6213A-25DHNPA	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2GL	ec	AP6213A-25DHNGA1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GL	ec	AP6213A-25DHNPA1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2GL	eh	AP6213A-25DHNGP1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GL	eh	AP6213A-25DHNPP1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2GM	-	AP6213A-25DLNGP	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GM	-	AP6213A-25DLNPP	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2GM	eb	AP6213A-25DLNGA	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GM	eb	AP6213A-25DLNPA	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2GM	ec	AP6213A-25DLNGA1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2GM	ec	AP6213A-25DLNPA1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2GM	eh	AP6213A-25DLNGP1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2GM	eh	AP6213A-25DLNPP1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2H0	-	XC9235F10DMR-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2H0	ej	XC6103D331MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2H1	-	XC9235F11DMR-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2H1	ej	XC6103D332MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2H2	-	XC9235F12DMR-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2H2	ej	XC6103D333MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2H3	-	XC9235F13DMR-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2H3	ej	XC6103D334MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2H4	-	XC9235F14DMR-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2H4	ej	XC6103D335MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2H5	-	XC9235F15DMR-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2H5	ej	XC6103D336MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2H6	-	XC9235F16DMR-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2H6	ej	XC6103D337MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2H7	-	XC9235F17DMR-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2H7	ej	XC6103D338MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2H8	-	XC9235F18DMR-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2H8	ej	XC6103D339MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2H9	-	XC9235F19DMR-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2H9	ej	XC6103D340MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HA	-	XC9235F1ADMR-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2HA	ej	XC6103D341MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HB	-	XC9235F1BDMR-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2HB	ej	XC6103D342MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HC	-	XC9235F1CDMR-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2HC	ej	XC6103D343MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HD	-	XC9235F1DDMR-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2HD	ej	XC6103D344MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HE	-	XC9235F1EDMR-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2HE	ej	XC6103D345MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HF	-	XC9235F1FDMR-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2HF	ec	XC6103D316MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HF	ej	XC6103D346MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HH	-	XC9235F1HDMR-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2HH	ec	XC6103D317MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HH	ej	XC6103D347MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HK	-	XC9235F1KDMR-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2HK	ec	XC6103D318MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HK	ej	XC6103D348MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HL	-	XC9235F1LDMR-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2HL	ec	XC6103D319MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HL	ej	XC6103D349MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HM	-	XC9235F1MDMR-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2HM	ec	XC6103D320MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HM	ej	XC6103D350MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HN	ec	XC6103D321MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HP	ec	XC6103D322MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HR	ec	XC6103D323MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HS	ec	XC6103D324MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HT	ec	XC6103D325MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HU	ec	XC6103D326MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HV	ec	XC6103D327MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HX	ec	XC6103D328MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HY	ec	XC6103D329MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2HZ	ec	XC6103D330MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2J	-	BH2JNB1WHFV	LVR-IC	LDO, 2.85V±1.0%, 150mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
2J	-	R3111N121C	Vdet-IC	1.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
2K	-	R3111N221C	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2K0	-	XC9235F20DMR-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2K0	ej	XC6103D431MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2K1	-	XC9235F21DMR-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2K1	ej	XC6103D432MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2K2	-	XC9235F22DMR-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2K2	ej	XC6103D433MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2K3	-	XC9235F23DMR-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2K3	ej	XC6103D434MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2K4	-	XC9235F24DMR-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2K4	ej	XC6103D435MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2K5	-	XC9235F25DMR-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2K5	ej	XC6103D436MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2K6	-	XC9235F26DMR-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2K6	ej	XC6103D437MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2K7	-	XC9235F27DMR-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2K7	ej	XC6103D438MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2K8	-	XC9235F28DMR-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2K8	ej	XC6103D439MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2K9	-	XC9235F29DMR-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2K9	ej	XC6103D440MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KA	-	XC9235F2ADMR-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2KA	ej	XC6103D441MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KB	-	XC9235F2BDMR-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2KB	ej	XC6103D442MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KC	-	XC9235F2CDMR-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2KC	ej	XC6103D443MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KD	-	XC9235F2DDMR-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2KD	ej	XC6103D444MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KE	-	XC9235F2EDMR-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2KE	ej	XC6103D445MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KF	-	XC9235F2FDMR-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2KF	ec	XC6103D416MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KF	ej	XC6103D446MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KH	-	XC9235F2HDMR-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2KH	ec	XC6103D417MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KH	ej	XC6103D447MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KK	-	XC9235F2KDMR-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2KK	ec	XC6103D418MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KK	ej	XC6103D448MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KL	-	XC9235F2LDMR-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2KL	ec	XC6103D419MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KL	ej	XC6103D449MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KM	-	XC9235F2MDMR-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2KM	ec	XC6103D420MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KM	ej	XC6103D450MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KN	ec	XC6103D421MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KP	ec	XC6103D422MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KR	ec	XC6103D423MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KS	ec	XC6103D424MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KT	ec	XC6103D425MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KU	ec	XC6103D426MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KV	ec	XC6103D427MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KX	ec	XC6103D428MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KY	ec	XC6103D429MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2KZ	ec	XC6103D430MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2L	-	R3111N321C	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
2L0	-	XC9235F30DMR-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2L0	ej	XC6103D531MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2L1	-	XC9235F31DMR-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2L1	ej	XC6103D532MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2L2	-	XC9235F32DMR-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2L2	ej	XC6103D533MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2L3	-	XC9235F33DMR-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2L3	ej	XC6103D534MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2L4	-	XC9235F34DMR-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2L4	ej	XC6103D535MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2L5	-	XC9235F35DMR-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2L5	ej	XC6103D536MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2L6	-	XC9235F36DMR-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2L6	ej	XC6103D537MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2L7	-	XC9235F37DMR-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2L7	ej	XC6103D538MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2L8	-	XC9235F38DMR-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2L8	ej	XC6103D539MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2L9	-	XC9235F39DMR-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2L9	ej	XC6103D540MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LA	-	AP6213A-2JNHFGP	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LA	-	AP6213A-2JNHFPP	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2LA	-	XC9235F3ADMR-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2LA	eb	AP6213A-2JNHFGA	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LA	eb	AP6213A-2JNHFPA	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2LA	ec	AP6213A-2JNHFGA1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LA	ec	AP6213A-2JNHFPA1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2LA	eh	AP6213A-2JNHFGP1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LA	eh	AP6213A-2JNHFPP1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2LA	ej	XC6103D541MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LB	-	AP6213A-2JNLFGP	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LB	-	AP6213A-2JNLFPP	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2LB	-	XC9235F3BDMR-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2LB	eb	AP6213A-2JNLFGA	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LB	eb	AP6213A-2JNLFPA	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2LB	ec	AP6213A-2JNLFGA1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LB	ec	AP6213A-2JNLFPA1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2LB	eh	AP6213A-2JNLFGP1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LB	eh	AP6213A-2JNLFPP1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2LB	ej	XC6103D542MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LC	-	AP6213A-2JNHNGP	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LC	-	AP6213A-2JNHNPP	LVR-IC	LDO, 2.85V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2LC	-	XC9235F3CDMR-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2LC	eb	AP6213A-2JNHNGA	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LC	eb	AP6213A-2JNHNPA	LVR-IC	LDO, 2.85V±2%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2LC	ec	AP6213A-2JNHNGA1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LC	ec	AP6213A-2JNHNPA1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2LC	eh	AP6213A-2JNHNGP1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LC	eh	AP6213A-2JNHNPP1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2LC	ej	XC6103D543MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LD	-	AP6213A-2JNLNGP	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LD	-	AP6213A-2JNLNPP	LVR-IC	LDO, 2.85V±2%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2LD	-	XC9235F3DDMR-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2LD	eb	AP6213A-2JNLNGA	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LD	eb	AP6213A-2JNLNPA	LVR-IC	LDO, 2.85V±2%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2LD	ec	AP6213A-2JNLNGA1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LD	ec	AP6213A-2JNLNPA1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2LD	eh	AP6213A-2JNLNGP1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LD	eh	AP6213A-2JNLNPP1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2LD	ej	XC6103D544MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LE	-	AP6213A-2JUHFGP	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LE	-	AP6213A-2JUHFPP	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2LE	-	XC9235F3EDMR-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2LE	eb	AP6213A-2JUHFGA	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LE	eb	AP6213A-2JUHFPA	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2LE	ec	AP6213A-2JUHFGA1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LE	ec	AP6213A-2JUHFPA1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2LE	eh	AP6213A-2JUHFGP1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LE	eh	AP6213A-2JUHFPP1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2LE	ej	XC6103D545MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LF	-	AP6213A-2JULFGP	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LF	-	AP6213A-2JULFPP	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2LF	-	XC9235F3FDMR-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2LF	eb	AP6213A-2JULFGA	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LF	eb	AP6213A-2JULFPA	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2LF	ec	AP6213A-2JULFGA1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LF	ec	AP6213A-2JULFPA1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2LF	ec	XC6103D516MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LF	eh	AP6213A-2JULFGP1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LF	eh	AP6213A-2JULFPP1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2LF	ej	XC6103D546MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LG	-	AP6213A-2JUHNGP	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LG	-	AP6213A-2JUHNPP	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2LG	eb	AP6213A-2JUHNGA	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2LG	eb	AP6213A-2JUHNPA	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2LG	ec	AP6213A-2JUHNGA1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LG	ec	AP6213A-2JUHNPA1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2LG	eh	AP6213A-2JUHNGP1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LG	eh	AP6213A-2JUHNPP1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2LH	-	AP6213A-2JULNGP	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LH	-	AP6213A-2JULNPP	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2LH	-	XC9235F3HDMR-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2LH	eb	AP6213A-2JULNGA	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LH	eb	AP6213A-2JULNPA	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2LH	ec	AP6213A-2JULNGA1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LH	ec	AP6213A-2JULNPA1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2LH	ec	XC6103D517MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LH	eh	AP6213A-2JULNGP1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LH	eh	AP6213A-2JULNPP1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2LH	ej	XC6103D547MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LJ	-	AP6213A-2JDHFGP	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LJ	-	AP6213A-2JDHFPP	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2LJ	eb	AP6213A-2JDHFGA	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LJ	eb	AP6213A-2JDHFPA	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2LJ	ec	AP6213A-2JDHFGA1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LJ	ec	AP6213A-2JDHFPA1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2LJ	eh	AP6213A-2JDHFGP1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LJ	eh	AP6213A-2JDHFPP1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2LK	-	AP6213A-2JDLFGP	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LK	-	AP6213A-2JDLFPP	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2LK	-	XC9235F3KDMR-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2LK	eb	AP6213A-2JDLFGA	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LK	eb	AP6213A-2JDLFPA	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2LK	ec	AP6213A-2JDLFGA1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LK	ec	AP6213A-2JDLFPA1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2LK	ec	XC6103D518MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LK	eh	AP6213A-2JDLFGP1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LK	eh	AP6213A-2JDLFPP1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2LK	ej	XC6103D548MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LL	-	AP6213A-2JDHNGP	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LL	-	AP6213A-2JDHNPP	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2LL	-	XC9235F3LDMR-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2LL	eb	AP6213A-2JDHNGA	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LL	eb	AP6213A-2JDHNPA	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2LL	ec	AP6213A-2JDHNGA1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LL	ec	AP6213A-2JDHNPA1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2LL	ec	XC6103D519MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LL	eh	AP6213A-2JDHNGP1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LL	eh	AP6213A-2JDHNPP1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2LL	ej	XC6103D549MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LM	-	AP6213A-2JDLNGP	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LM	-	AP6213A-2JDLNPP	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2LM	-	XC9235F3MDMR-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2LM	eb	AP6213A-2JDLNGA	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LM	eb	AP6213A-2JDLNPA	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2LM	ec	AP6213A-2JDLNGA1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2LM	ec	AP6213A-2JDLNPA1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2LM	ec	XC6103D520MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LM	eh	AP6213A-2JDLNGP1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2LM	eh	AP6213A-2JDLNPP1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2LM	ej	XC6103D550MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LN	ec	XC6103D521MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LP	ec	XC6103D522MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LR	ec	XC6103D523MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LS	ec	XC6103D524MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LT	ec	XC6103D525MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LU	ec	XC6103D526MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LV	ec	XC6103D527MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LX	ec	XC6103D528MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LY	ec	XC6103D529MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2LZ	ec	XC6103D530MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2M	-	R3111N421C	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
2M0	-	XC9235F40DMR-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
2M0	ej	XC6103D631MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2M1	ej	XC6103D632MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2M2	ej	XC6103D633MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2M3	-	S-5844A70DB-M5T1U3	Tdet-IC	+70°C, 10°C hysteresis, -ODO	SOT-23-5	28a8	TDET1	6g	Sii
2M3	ej	XC6103D634MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2M4	ej	XC6103D635MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2M5	ej	XC6103D636MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2M6	ej	XC6103D637MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2M7	ej	XC6103D638MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2M8	ej	XC6103D639MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2M9	ej	XC6103D640MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MA	-	AP6213A-30NHFGP	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MA	-	AP6213A-30NHFPP	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2MA	-	S-5844A75CB-M5T1U3	Tdet-IC	+75°C, 10°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MA	eb	AP6213A-30NHFGA	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MA	eb	AP6213A-30NHFPA	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2MA	ec	AP6213A-30NHFGA1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MA	ec	AP6213A-30NHFPA1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2MA	eh	AP6213A-30NHFGP1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MA	eh	AP6213A-30NHFPP1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2MA	ej	XC6103D641MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MB	-	AP6213A-30NLFGP	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MB	-	AP6213A-30NLFPP	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2MB	-	S-5844A80CB-M5T1U3	Tdet-IC	+80°C, 10°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MB	eb	AP6213A-30NLFGA	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MB	eb	AP6213A-30NLFPA	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2MB	ec	AP6213A-30NLFGA1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MB	ec	AP6213A-30NLFPA1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2MB	eh	AP6213A-30NLFGP1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MB	eh	AP6213A-30NLFPP1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2MB	ej	XC6103D642MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MC	-	AP6213A-30NHNGP	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MC	-	AP6213A-30NHNPP	LVR-IC	LDO, 3.0V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2MC	-	S-5844A85CB-M5T1U3	Tdet-IC	+85°C, 10°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MC	eb	AP6213A-30NHNGA	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MC	eb	AP6213A-30NHNPA	LVR-IC	LDO, 3.0V±2%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2MC	ec	AP6213A-30NHNGA1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MC	ec	AP6213A-30NHNPA1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2MC	eh	AP6213A-30NHNGP1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MC	eh	AP6213A-30NHNPP1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2MC	ej	XC6103D643MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MD	-	AP6213A-30NLNGP	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MD	-	AP6213A-30NLNPP	LVR-IC	LDO, 3.0V±2%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2MD	-	S-5844A90CB-M5T1U3	Tdet-IC	+90°C, 10°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MD	eb	AP6213A-30NLNGA	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MD	eb	AP6213A-30NLNPA	LVR-IC	LDO, 3.0V±2%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2MD	ec	AP6213A-30NLNGA1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MD	ec	AP6213A-30NLNPA1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2MD	eh	AP6213A-30NLNGP1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MD	eh	AP6213A-30NLNPP1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2MD	ej	XC6103D644MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2ME	-	AP6213A-30UHFGP	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ME	-	AP6213A-30UHFPP	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2ME	-	S-5844A95CB-M5T1U3	Tdet-IC	+95°C, 10°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2ME	eb	AP6213A-30UHFGA	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ME	eb	AP6213A-30UHFPA	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2ME	ec	AP6213A-30UHFGA1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ME	ec	AP6213A-30UHFPA1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2ME	eh	AP6213A-30UHFGP1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ME	eh	AP6213A-30UHFPP1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2ME	ej	XC6103D645MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MF	-	AP6213A-30ULFGP	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MF	-	AP6213A-30ULFPP	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2MF	-	S-5844A55CB-I4T1U3	Tdet-IC	+55°C, 10°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MF	-	S-5844A55CB-M5T1U3	Tdet-IC	+55°C, 10°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MF	eb	AP6213A-30ULFGA	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MF	eb	AP6213A-30ULFPA	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2MF	ec	AP6213A-30ULFGA1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MF	ec	AP6213A-30ULFPA1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2MF	ec	XC6103D616MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MF	eh	AP6213A-30ULFGP1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2MF	eh	AP6213A-30ULFPP1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2MF	ej	XC6103D646MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MG	-	AP6213A-30UHNGP	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MG	-	AP6213A-30UHNPP	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2MG	-	S-5844A60CB-M5T1U3	Tdet-IC	+60°C, 10°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MG	eb	AP6213A-30UHNGA	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MG	eb	AP6213A-30UHNPA	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2MG	ec	AP6213A-30UHNGA1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MG	ec	AP6213A-30UHNPA1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2MG	eh	AP6213A-30UHNGP1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MG	eh	AP6213A-30UHNPP1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2MH	-	AP6213A-30ULNGP	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MH	-	AP6213A-30ULNPP	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2MH	-	S-5844A65CB-M5T1U3	Tdet-IC	+65°C, 10°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MH	eb	AP6213A-30ULNGA	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MH	eb	AP6213A-30ULNPA	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2MH	ec	AP6213A-30ULNGA1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MH	ec	AP6213A-30ULNPA1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2MH	ec	XC6103D617MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MH	eh	AP6213A-30ULNGP1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MH	eh	AP6213A-30ULNPP1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2MH	ej	XC6103D647MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MI	-	S-5844A70CB-M5T1U3	Tdet-IC	+70°C, 10°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MJ	-	AP6213A-30DHFGP	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MJ	-	AP6213A-30DHFPP	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2MJ	eb	AP6213A-30DHFGA	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MJ	eb	AP6213A-30DHFPA	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2MJ	ec	AP6213A-30DHFGA1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MJ	ec	AP6213A-30DHFPA1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2MJ	eh	AP6213A-30DHFGP1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MJ	eh	AP6213A-30DHFPP1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2MK	-	AP6213A-30DLFGP	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MK	-	AP6213A-30DLFPP	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2MK	eb	AP6213A-30DLFGA	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MK	eb	AP6213A-30DLFPA	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2MK	ec	AP6213A-30DLFGA1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MK	ec	AP6213A-30DLFPA1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2MK	ec	XC6103D618MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MK	eh	AP6213A-30DLFGP1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MK	eh	AP6213A-30DLFPP1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2MK	ej	XC6103D648MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2ML	-	AP6213A-30DHNGP	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ML	-	AP6213A-30DHNPP	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2ML	eb	AP6213A-30DHNGA	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ML	eb	AP6213A-30DHNPA	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2ML	ec	AP6213A-30DHNGA1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ML	ec	AP6213A-30DHNPA1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2ML	ec	XC6103D619MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2ML	eh	AP6213A-30DHNGP1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ML	eh	AP6213A-30DHNPP1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2ML	ej	XC6103D649MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MM	-	AP6213A-30DLNGP	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MM	-	AP6213A-30DLNPP	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2MM	eb	AP6213A-30DLNGA	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MM	eb	AP6213A-30DLNPA	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2MM	ec	AP6213A-30DLNGA1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2MM	ec	AP6213A-30DLNPA1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2MM	ec	XC6103D620MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MM	eh	AP6213A-30DLNGP1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2MM	eh	AP6213A-30DLNPP1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2MM	ej	XC6103D650MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MN	ec	XC6103D621MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MP	ec	XC6103D622MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MR	-	S-5844A75DB-M5T1U3	Tdet-IC	+75°C, 10°C hysteresis, -ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MR	ec	XC6103D623MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MS	-	S-5844A80DB-M5T1U3	Tdet-IC	+80°C, 10°C hysteresis, -ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MS	ec	XC6103D624MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MT	-	S-5844A85DB-M5T1U3	Tdet-IC	+85°C, 10°C hysteresis, -ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MT	ec	XC6103D625MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MU	-	S-5844A90DB-M5T1U3	Tdet-IC	+90°C, 10°C hysteresis, -ODO	SOT-23-5	28a8	TDET1	6g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2MU	ec	XC6103D626MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MV	-	S-5844A95DB-M5T1U3	Tdet-IC	+95°C, 10°C hysteresis, -ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MV	ec	XC6103D627MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MX	-	S-5844A55DB-I4T1U3	Tdet-IC	+55°C, 10°C hysteresis, -ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MX	-	S-5844A55DB-M5T1U3	Tdet-IC	+55°C, 10°C hysteresis, -ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MX	ec	XC6103D628MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MY	-	S-5844A60DB-M5T1U3	Tdet-IC	+60°C, 10°C hysteresis, -ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MY	ec	XC6103D629MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2MZ	-	S-5844A65DB-M5T1U3	Tdet-IC	+65°C, 10°C hysteresis, -ODO	SOT-23-5	28a8	TDET1	6g	Sii
2MZ	ec	XC6103D630MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
2N	-	R3111N521C	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
2NA	-	AP6213A-32NHFGP	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NA	-	AP6213A-32NHFPP	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2NA	eb	AP6213A-32NHFGA	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NA	eb	AP6213A-32NHFPA	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2NA	ec	AP6213A-32NHFGA1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NA	ec	AP6213A-32NHFPA1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2NA	eh	AP6213A-32NHFGP1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NA	eh	AP6213A-32NHFPP1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2NB	-	AP6213A-32NLFGP	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NB	-	AP6213A-32NLFPP	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2NB	eb	AP6213A-32NLFGA	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NB	eb	AP6213A-32NLFPA	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2NB	ec	AP6213A-32NLFGA1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NB	ec	AP6213A-32NLFPA1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2NB	eh	AP6213A-32NLFGP1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NB	eh	AP6213A-32NLFPP1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2NC	-	AP6213A-32NHNGP	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NC	-	AP6213A-32NHNPP	LVR-IC	LDO, 3.1V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2NC	eb	AP6213A-32NHNGA	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NC	eb	AP6213A-32NHNPA	LVR-IC	LDO, 3.1V±2%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2NC	ec	AP6213A-32NHNGA1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NC	ec	AP6213A-32NHNPA1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2NC	eh	AP6213A-32NHNGP1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NC	eh	AP6213A-32NHNPP1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2ND	-	AP6213A-32NLNGP	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ND	-	AP6213A-32NLNPP	LVR-IC	LDO, 3.1V±2%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2ND	eb	AP6213A-32NLNGA	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ND	eb	AP6213A-32NLNPA	LVR-IC	LDO, 3.1V±2%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2ND	ec	AP6213A-32NLNGA1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ND	ec	AP6213A-32NLNPA1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2ND	eh	AP6213A-32NLNGP1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ND	eh	AP6213A-32NLNPP1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2NE	-	AP6213A-32UHFGP	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NE	-	AP6213A-32UHFPP	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2NE	eb	AP6213A-32UHFGA	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NE	eb	AP6213A-32UHFPA	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2NE	ec	AP6213A-32UHFGA1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NE	ec	AP6213A-32UHFPA1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2NE	eh	AP6213A-32UHFGP1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NE	eh	AP6213A-32UHFPP1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2NF	-	AP6213A-32ULFGP	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NF	-	AP6213A-32ULFPP	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2NF	eb	AP6213A-32ULFGA	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NF	eb	AP6213A-32ULFPA	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2NF	ec	AP6213A-32ULFGA1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NF	ec	AP6213A-32ULFPA1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2NF	eh	AP6213A-32ULFGP1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NF	eh	AP6213A-32ULFPP1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2NG	-	AP6213A-32UHNGP	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NG	-	AP6213A-32UHNPP	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2NG	eb	AP6213A-32UHNGA	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NG	eb	AP6213A-32UHNPA	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2NG	ec	AP6213A-32UHNGA1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NG	ec	AP6213A-32UHNPA1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2NG	eh	AP6213A-32UHNGP1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NG	eh	AP6213A-32UHNPP1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2NH	-	AP6213A-32ULNGP	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NH	-	AP6213A-32ULNPP	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2NH	eb	AP6213A-32ULNGA	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2NH	eb	AP6213A-32ULNPA	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2NH	ec	AP6213A-32ULNGA1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NH	ec	AP6213A-32ULNPA1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2NH	eh	AP6213A-32ULNGP1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NH	eh	AP6213A-32ULNPP1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2NJ	-	AP6213A-32DHFGP	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NJ	-	AP6213A-32DHFPP	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2NJ	eb	AP6213A-32DHFGA	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NJ	eb	AP6213A-32DHFPA	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2NJ	ec	AP6213A-32DHFGA1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NJ	ec	AP6213A-32DHFPA1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2NJ	eh	AP6213A-32DHFGP1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NJ	eh	AP6213A-32DHFPP1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2NK	-	AP6213A-32DLFGP	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NK	-	AP6213A-32DLFPP	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2NK	eb	AP6213A-32DLFGA	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NK	eb	AP6213A-32DLFPA	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2NK	ec	AP6213A-32DLFGA1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NK	ec	AP6213A-32DLFPA1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2NK	eh	AP6213A-32DLFGP1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NK	eh	AP6213A-32DLFPP1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2NL	-	AP6213A-32DHNGP	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NL	-	AP6213A-32DHNPP	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2NL	eb	AP6213A-32DHNGA	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NL	eb	AP6213A-32DHNPA	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2NL	ec	AP6213A-32DHNGA1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NL	ec	AP6213A-32DHNPA1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2NL	eh	AP6213A-32DHNGP1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NL	eh	AP6213A-32DHNPP1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2NM	-	AP6213A-32DLNGP	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NM	-	AP6213A-32DLNPP	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2NM	eb	AP6213A-32DLNGA	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NM	eb	AP6213A-32DLNPA	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2NM	ec	AP6213A-32DLNGA1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2NM	ec	AP6213A-32DLNPA1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2NM	eh	AP6213A-32DLNGP1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2NM	eh	AP6213A-32DLNPP1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2OA	-	S-5844A75CC-M5T1U3	Tdet-IC	+75°C, 15°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2OB	-	S-5844A80CC-M5T1U3	Tdet-IC	+80°C, 15°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2OC	-	S-5844A85CC-M5T1U3	Tdet-IC	+85°C, 15°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2OD	-	S-5844A90CC-M5T1U3	Tdet-IC	+90°C, 15°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2OE	-	S-5844A95CC-M5T1U3	Tdet-IC	+95°C, 15°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2OF	-	S-5844A55CC-I4T1U3	Tdet-IC	+55°C, 15°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2OF	-	S-5844A55CC-M5T1U3	Tdet-IC	+55°C, 15°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2OG	-	S-5844A60CC-M5T1U3	Tdet-IC	+60°C, 15°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2OH	-	S-5844A65CC-M5T1U3	Tdet-IC	+65°C, 15°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2OI	-	S-5844A70CC-M5T1U3	Tdet-IC	+70°C, 15°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2P0	ej	XC6103E431MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2P1	ej	XC6103E432MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2P2	ej	XC6103E433MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2P3	ej	XC6103E434MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2P4	ej	XC6103E435MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2P5	ej	XC6103E436MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2P6	ej	XC6103E437MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2P7	ej	XC6103E438MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2P8	ej	XC6103E439MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2P9	ej	XC6103E440MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PA	ej	XC6103E441MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PB	ej	XC6103E442MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PC	ej	XC6103E443MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PD	ej	XC6103E444MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PE	ej	XC6103E445MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PF	ec	XC6103E416MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PF	ej	XC6103E446MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PH	ec	XC6103E417MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PH	ej	XC6103E447MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PK	ec	XC6103E418MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PK	ej	XC6103E448MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PL	ec	XC6103E419MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PL	ej	XC6103E449MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2PM	ec	XC6103E420MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PM	ej	XC6103E450MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PN	ec	XC6103E421MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PP	ec	XC6103E422MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PR	ec	XC6103E423MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PS	ec	XC6103E424MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PT	ec	XC6103E425MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PU	ec	XC6103E426MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PV	ec	XC6103E427MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PX	ec	XC6103E428MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PY	ec	XC6103E429MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2PZ	ec	XC6103E430MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2Q	-	R1210N221A	DC-DC-IC	PWM step-up, 2.1V, 35..100kHz	SOT-23-5	28sc	DC3	6g	Ric
2QA	-	AP6213A-33NHFGP	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QA	-	AP6213A-33NHFPP	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2QA	-	S-5844A75CD-M5T1U3	Tdet-IC	+75°C, 20°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2QA	eb	AP6213A-33NHFGA	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QA	eb	AP6213A-33NHFPA	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2QA	ec	AP6213A-33NHFGA1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QA	ec	AP6213A-33NHFPA1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2QA	eh	AP6213A-33NHFGP1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QA	eh	AP6213A-33NHFPP1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2QB	-	AP6213A-33NLFGP	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QB	-	AP6213A-33NLFPP	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2QB	-	S-5844A80CD-M5T1U3	Tdet-IC	+80°C, 20°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2QB	eb	AP6213A-33NLFGA	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QB	eb	AP6213A-33NLFPA	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2QB	ec	AP6213A-33NLFGA1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QB	ec	AP6213A-33NLFPA1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2QB	eh	AP6213A-33NLFGP1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QB	eh	AP6213A-33NLFPP1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2QC	-	AP6213A-33NHNGP	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QC	-	AP6213A-33NHNPP	LVR-IC	LDO, 3.3V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2QC	-	S-5844A85CD-M5T1U3	Tdet-IC	+85°C, 20°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2QC	eb	AP6213A-33NHNGA	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QC	eb	AP6213A-33NHNPA	LVR-IC	LDO, 3.3V±2%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2QC	ec	AP6213A-33NHNGA1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QC	ec	AP6213A-33NHNPA1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2QC	eh	AP6213A-33NHNGP1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QC	eh	AP6213A-33NHNPP1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2QD	-	AP6213A-33NLNGP	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QD	-	AP6213A-33NLNPP	LVR-IC	LDO, 3.3V±2%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2QD	-	S-5844A90CD-M5T1U3	Tdet-IC	+90°C, 20°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2QD	eb	AP6213A-33NLNGA	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QD	eb	AP6213A-33NLNPA	LVR-IC	LDO, 3.3V±2%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2QD	ec	AP6213A-33NLNGA1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QD	ec	AP6213A-33NLNPA1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2QD	eh	AP6213A-33NLNGP1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QD	eh	AP6213A-33NLNPP1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2QE	-	AP6213A-33UHFGP	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QE	-	AP6213A-33UHFPP	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2QE	-	S-5844A95CD-M5T1U3	Tdet-IC	+95°C, 20°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2QE	eb	AP6213A-33UHFGA	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QE	eb	AP6213A-33UHFPA	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2QE	ec	AP6213A-33UHFGA1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QE	ec	AP6213A-33UHFPA1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2QE	eh	AP6213A-33UHFGP1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QE	eh	AP6213A-33UHFPP1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2QF	-	AP6213A-33ULFGP	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QF	-	AP6213A-33ULFPP	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2QF	-	S-5844A55CD-I4T1U3	Tdet-IC	+55°C, 20°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2QF	-	S-5844A55CD-M5T1U3	Tdet-IC	+55°C, 20°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2QF	eb	AP6213A-33ULFGA	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QF	eb	AP6213A-33ULFPA	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2QF	ec	AP6213A-33ULFGA1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QF	ec	AP6213A-33ULFPA1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2QF	eh	AP6213A-33ULFGP1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QF	eh	AP6213A-33ULFPP1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2QG	-	AP6213A-33UHNGP	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QG	-	AP6213A-33UHNPP	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2QG	-	S-5844A60CD-M5T1U3	Tdet-IC	+60°C, 20°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2QG	eb	AP6213A-33UHNGA	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QG	eb	AP6213A-33UHNPA	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2QG	ec	AP6213A-33UHNGA1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QG	ec	AP6213A-33UHNPA1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2QG	eh	AP6213A-33UHNGP1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QG	eh	AP6213A-33UHNPP1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2QH	-	AP6213A-33ULNGP	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QH	-	AP6213A-33ULNPP	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2QH	-	S-5844A65CD-M5T1U3	Tdet-IC	+65°C, 20°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2QH	eb	AP6213A-33ULNGA	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QH	eb	AP6213A-33ULNPA	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2QH	ec	AP6213A-33ULNGA1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QH	ec	AP6213A-33ULNPA1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2QH	eh	AP6213A-33ULNGP1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QH	eh	AP6213A-33ULNPP1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2QI	-	S-5844A70CD-M5T1U3	Tdet-IC	+70°C, 20°C hysteresis, +ODO	SOT-23-5	28a8	TDET1	6g	Sii
2QJ	-	AP6213A-33DHFGP	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QJ	-	AP6213A-33DHFPP	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2QJ	eb	AP6213A-33DHFGA	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QJ	eb	AP6213A-33DHFPA	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2QJ	ec	AP6213A-33DHFGA1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QJ	ec	AP6213A-33DHFPA1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2QJ	eh	AP6213A-33DHFGP1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QJ	eh	AP6213A-33DHFPP1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2QK	-	AP6213A-33DLFGP	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QK	-	AP6213A-33DLFPP	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2QK	eb	AP6213A-33DLFGA	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QK	eb	AP6213A-33DLFPA	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2QK	ec	AP6213A-33DLFGA1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QK	ec	AP6213A-33DLFPA1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2QK	eh	AP6213A-33DLFGP1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QK	eh	AP6213A-33DLFPP1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2QL	-	AP6213A-33DHNGP	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QL	-	AP6213A-33DHNPP	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2QL	eb	AP6213A-33DHNGA	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QL	eb	AP6213A-33DHNPA	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2QL	ec	AP6213A-33DHNGA1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QL	ec	AP6213A-33DHNPA1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2QL	eh	AP6213A-33DHNGP1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QL	eh	AP6213A-33DHNPP1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2QM	-	AP6213A-33DLNGP	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QM	-	AP6213A-33DLNPP	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2QM	eb	AP6213A-33DLNGA	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QM	eb	AP6213A-33DLNPA	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2QM	ec	AP6213A-33DLNGA1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2QM	ec	AP6213A-33DLNPA1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2QM	eh	AP6213A-33DLNGP1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2QM	eh	AP6213A-33DLNPP1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2R	-	R1210N321A	DC-DC-IC	PWM step-up, 3.2V, 35..100kHz	SOT-23-5	28sc	DC3	6g	Ric
2R0	ej	XC6103E531MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2R1	ej	XC6103E532MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2R2	ej	XC6103E533MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2R3	ej	XC6103E534MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2R4	ej	XC6103E535MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2R5	ej	XC6103E536MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2R6	ej	XC6103E537MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2R7	ej	XC6103E538MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2R8	ej	XC6103E539MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2R9	ej	XC6103E540MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RA	ej	XC6103E541MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RB	ej	XC6103E542MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RC	ej	XC6103E543MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RD	ej	XC6103E544MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RE	ej	XC6103E545MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RF	ec	XC6103E516MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RF	ej	XC6103E546MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RH	ec	XC6103E517MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RH	ej	XC6103E547MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RK	ec	XC6103E518MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2RK	ej	XC6103E548MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RL	ec	XC6103E519MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RL	ej	XC6103E549MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RM	ec	XC6103E520MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RM	ej	XC6103E550MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RN	ec	XC6103E521MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RP	ec	XC6103E522MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RR	ec	XC6103E523MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RS	ec	XC6103E524MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RT	ec	XC6103E525MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RU	ec	XC6103E526MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RV	ec	XC6103E527MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RX	ec	XC6103E528MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RY	ec	XC6103E529MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2RZ	ec	XC6103E530MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2S	-	RN5RF12AA	LVR-IC	LRip, -CE, 1.2V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
2S0	ej	XC6103E631MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2S1	ej	XC6103E632MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2S2	ej	XC6103E633MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2S3	ej	XC6103E634MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2S4	ej	XC6103E635MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2S5	ej	XC6103E636MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2S6	ej	XC6103E637MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2S7	ej	XC6103E638MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2S8	ej	XC6103E639MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2S9	ej	XC6103E640MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SA	ej	XC6103E641MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SB	ej	XC6103E642MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SC	ej	XC6103E643MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SD	ej	XC6103E644MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SE	ej	XC6103E645MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SF	ec	XC6103E616MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SF	ej	XC6103E646MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SH	ec	XC6103E617MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SH	ej	XC6103E647MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SK	ec	XC6103E618MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SK	ej	XC6103E648MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SL	ec	XC6103E619MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SL	ej	XC6103E649MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SM	ec	XC6103E620MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SM	ej	XC6103E650MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SN	ec	XC6103E621MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SP	ec	XC6103E622MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SR	ec	XC6103E623MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SS	ec	XC6103E624MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2ST	ec	XC6103E625MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SU	ec	XC6103E626MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SV	ec	XC6103E627MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SX	ec	XC6103E628MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SY	ec	XC6103E629MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2SZ	ec	XC6103E630MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
2T	-	RN5RF12BA	LVR-IC	LRip, +CE, 1.2V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
2T0	ej	XC6103F531MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2T1	ej	XC6103F532MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2T2	ej	XC6103F533MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2T3	ej	XC6103F534MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2T4	ej	XC6103F535MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2T5	ej	XC6103F536MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2T6	ej	XC6103F537MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2T7	ej	XC6103F538MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2T8	ej	XC6103F539MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2T9	ej	XC6103F540MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TA	ej	XC6103F541MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TB	ej	XC6103F542MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TC	ej	XC6103F543MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TD	ej	XC6103F544MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TE	ej	XC6103F545MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TF	ec	XC6103F516MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TF	ej	XC6103F546MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TH	ec	XC6103F517MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2TH	ej	XC6103F547MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TK	ec	XC6103F518MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TK	ej	XC6103F548MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TL	ec	XC6103F519MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TL	ej	XC6103F549MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TM	ec	XC6103F520MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TM	ej	XC6103F550MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TN	ec	XC6103F521MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TP	ec	XC6103F522MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TR	ec	XC6103F523MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TS	ec	XC6103F524MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TT	ec	XC6103F525MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TU	ec	XC6103F526MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TV	ec	XC6103F527MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TX	ec	XC6103F528MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TY	ec	XC6103F529MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2TZ	ec	XC6103F530MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2U	-	R1210N221C	DC-DC-IC	PWM step-up, 2.1V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
2U0	ej	XC6103F631MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2U1	ej	XC6103F632MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2U2	ej	XC6103F633MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2U3	ej	XC6103F634MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2U4	ej	XC6103F635MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2U5	ej	XC6103F636MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2U6	ej	XC6103F637MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2U7	ej	XC6103F638MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2U8	ej	XC6103F639MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2U9	ej	XC6103F640MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UA	ej	XC6103F641MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UB	ej	XC6103F642MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UC	ej	XC6103F643MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UD	ej	XC6103F644MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UE	ej	XC6103F645MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UF	ec	XC6103F616MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UF	ej	XC6103F646MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UH	ec	XC6103F617MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UH	ej	XC6103F647MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UK	ec	XC6103F618MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UK	ej	XC6103F648MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UL	ec	XC6103F619MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UL	ej	XC6103F649MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UM	ec	XC6103F620MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UM	ej	XC6103F650MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UN	ec	XC6103F621MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UP	ec	XC6103F622MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UR	ec	XC6103F623MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2US	ec	XC6103F624MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UT	ec	XC6103F625MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UU	ec	XC6103F626MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UV	ec	XC6103F627MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UX	ec	XC6103F628MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UY	ec	XC6103F629MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2UZ	ec	XC6103F630MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
2V0	-	TAR5S20	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
2V0	-	TAR5S20U	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
2V0	ej	XC6103H631MR	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2V1	-	TAR5S21	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
2V1	-	TAR5S21U	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
2V1	ej	XC6103H632MR	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2V2	-	TAR5S22	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
2V2	-	TAR5S22U	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
2V2	ej	XC6103H633MR	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2V3	-	TAR5S23	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
2V3	-	TAR5S23U	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
2V3	ej	XC6103H634MR	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2V4	-	TAR5S24	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
2V4	-	TAR5S24U	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
2V4	ej	XC6103H635MR	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2V5	-	TAR5S25	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
2V5	-	TAR5S25U	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2V5	ej	XC6103H636MR	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2V6	-	TAR5S26	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
2V6	-	TAR5S26U	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
2V6	ej	XC6103H637MR	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2V7	-	TAR5S27	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
2V7	-	TAR5S27U	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
2V7	ej	XC6103H638MR	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2V8	-	TAR5S28	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
2V8	-	TAR5S28U	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
2V8	ej	XC6103H639MR	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2V9	-	TAR5S29	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
2V9	-	TAR5S29U	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
2V9	ej	XC6103H640MR	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VA	-	AP6213A-36NHFGP	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VA	-	AP6213A-36NHFPP	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2VA	eb	AP6213A-36NHFGA	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VA	eb	AP6213A-36NHFPA	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2VA	ec	AP6213A-36NHFGA1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VA	ec	AP6213A-36NHFPA1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2VA	eh	AP6213A-36NHFGP1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VA	eh	AP6213A-36NHFPP1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2VA	ej	XC6103H641MR	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VB	-	AP6213A-36NLFGP	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VB	-	AP6213A-36NLFPP	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2VB	eb	AP6213A-36NLFGA	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VB	eb	AP6213A-36NLFPA	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2VB	ec	AP6213A-36NLFGA1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VB	ec	AP6213A-36NLFPA1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2VB	eh	AP6213A-36NLFGP1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VB	eh	AP6213A-36NLFPP1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2VB	ej	XC6103H642MR	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VC	-	AP6213A-36NHNGP	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VC	-	AP6213A-36NHNPP	LVR-IC	LDO, 3.6V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2VC	eb	AP6213A-36NHNGA	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VC	eb	AP6213A-36NHNPA	LVR-IC	LDO, 3.6V±2%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2VC	ec	AP6213A-36NHNGA1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VC	ec	AP6213A-36NHNPA1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2VC	eh	AP6213A-36NHNGP1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VC	eh	AP6213A-36NHNPP1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2VC	ej	XC6103H643MR	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VD	-	AP6213A-36NLNGP	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VD	-	AP6213A-36NLNPP	LVR-IC	LDO, 3.6V±2%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2VD	eb	AP6213A-36NLNGA	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VD	eb	AP6213A-36NLNPA	LVR-IC	LDO, 3.6V±2%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2VD	ec	AP6213A-36NLNGA1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VD	ec	AP6213A-36NLNPA1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2VD	eh	AP6213A-36NLNGP1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VD	eh	AP6213A-36NLNPP1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2VD	ej	XC6103H644MR	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VE	-	AP6213A-36UHFGP	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VE	-	AP6213A-36UHFPP	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2VE	eb	AP6213A-36UHFGA	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VE	eb	AP6213A-36UHFPA	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2VE	ec	AP6213A-36UHFGA1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VE	ec	AP6213A-36UHFPA1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2VE	eh	AP6213A-36UHFGP1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VE	eh	AP6213A-36UHFPP1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2VE	ej	XC6103H645MR	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VF	-	AP6213A-36ULFGP	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VF	-	AP6213A-36ULFPP	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2VF	eb	AP6213A-36ULFGA	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VF	eb	AP6213A-36ULFPA	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2VF	ec	AP6213A-36ULFGA1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VF	ec	AP6213A-36ULFPA1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2VF	ec	XC6103H616MR	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VF	eh	AP6213A-36ULFGP1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VF	eh	AP6213A-36ULFPP1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2VF	ej	XC6103H646MR	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VG	-	AP6213A-36UHNGP	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VG	-	AP6213A-36UHNPP	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2VG	eb	AP6213A-36UHNGA	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VG	eb	AP6213A-36UHNPA	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2VG	ec	AP6213A-36UHNGA1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VG	ec	AP6213A-36UHNPA1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2VG	eh	AP6213A-36UHNGP1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VG	eh	AP6213A-36UHNPP1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2VH	-	AP6213A-36ULNGP	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VH	-	AP6213A-36ULNPP	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2VH	eb	AP6213A-36ULNGA	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VH	eb	AP6213A-36ULNPA	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2VH	ec	AP6213A-36ULNGA1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VH	ec	AP6213A-36ULNPA1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2VH	ec	XC6103H617MR	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VH	eh	AP6213A-36ULNGP1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VH	eh	AP6213A-36ULNPP1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2VH	ej	XC6103H647MR	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VJ	-	AP6213A-36DHFGP	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VJ	-	AP6213A-36DHFPP	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2VJ	eb	AP6213A-36DHFGA	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VJ	eb	AP6213A-36DHFPA	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2VJ	ec	AP6213A-36DHFGA1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VJ	ec	AP6213A-36DHFPA1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2VJ	eh	AP6213A-36DHFGP1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VJ	eh	AP6213A-36DHFPP1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2VK	-	AP6213A-36DLFGP	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VK	-	AP6213A-36DLFPP	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2VK	eb	AP6213A-36DLFGA	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VK	eb	AP6213A-36DLFPA	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2VK	ec	AP6213A-36DLFGA1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VK	ec	AP6213A-36DLFPA1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2VK	ec	XC6103H618MR	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VK	eh	AP6213A-36DLFGP1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VK	eh	AP6213A-36DLFPP1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2VK	ej	XC6103H648MR	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VL	-	AP6213A-36DHNGP	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VL	-	AP6213A-36DHNPP	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2VL	eb	AP6213A-36DHNGA	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VL	eb	AP6213A-36DHNPA	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2VL	ec	AP6213A-36DHNGA1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VL	ec	AP6213A-36DHNPA1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2VL	ec	XC6103H619MR	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VL	eh	AP6213A-36DHNGP1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VL	eh	AP6213A-36DHNPP1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2VL	ej	XC6103H649MR	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VM	-	AP6213A-36DLNGP	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VM	-	AP6213A-36DLNPP	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2VM	eb	AP6213A-36DLNGA	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VM	eb	AP6213A-36DLNPA	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2VM	ec	AP6213A-36DLNGA1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2VM	ec	AP6213A-36DLNPA1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2VM	ec	XC6103H620MR	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VM	eh	AP6213A-36DLNGP1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2VM	eh	AP6213A-36DLNPP1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2VM	ej	XC6103H650MR	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VN	ec	XC6103H621MR	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VP	ec	XC6103H622MR	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VR	ec	XC6103H623MR	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VS	ec	XC6103H624MR	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VT	ec	XC6103H625MR	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VU	ec	XC6103H626MR	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VV	ec	XC6103H627MR	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VX	ec	XC6103H628MR	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VY	ec	XC6103H629MR	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2VZ	ec	XC6103H630MR	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
2W	-	R1210N321C	DC-DC-IC	PWM step-up, 3.2V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
2X	-	R1210N421C	DC-DC-IC	PWM step-up, 4.1V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
2Y	-	R1210N521C	DC-DC-IC	PWM step-up, 5.2V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
2Z	-	R1210N221D	DC-DC-IC	PWM step-up, 2.1V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
2ZA	-	AP6213A-50NHFGP	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZA	-	AP6213A-50NHFPP	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2ZA	eb	AP6213A-50NHFGA	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZA	eb	AP6213A-50NHFPA	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2ZA	ec	AP6213A-50NHFGA1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZA	ec	AP6213A-50NHFPA1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2ZA	eh	AP6213A-50NHFGP1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZA	eh	AP6213A-50NHFPP1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2ZB	-	AP6213A-50NLFGP	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZB	-	AP6213A-50NLFPP	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2ZB	eb	AP6213A-50NLFGA	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZB	eb	AP6213A-50NLFPA	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2ZB	ec	AP6213A-50NLFGA1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZB	ec	AP6213A-50NLFPA1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, CL fast	SOT-25	28cx	VR4	6kb	Anw
2ZB	eh	AP6213A-50NLFGP1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZB	eh	AP6213A-50NLFPP1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2ZC	-	AP6213A-50NHNGP	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZC	-	AP6213A-50NHNPP	LVR-IC	LDO, 5.0V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2ZC	eb	AP6213A-50NHNGA	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZC	eb	AP6213A-50NHNPA	LVR-IC	LDO, 5.0V±2%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2ZC	ec	AP6213A-50NHNGA1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZC	ec	AP6213A-50NHNPA1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE	SOT-25	28cx	VR4	6kb	Anw
2ZC	eh	AP6213A-50NHNGP1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZC	eh	AP6213A-50NHNPP1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE	SC-70-5	28cx	VR4	6kb	Anw
2ZD	-	AP6213A-50NLNGP	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZD	-	AP6213A-50NLNPP	LVR-IC	LDO, 5.0V±2%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2ZD	eb	AP6213A-50NLNGA	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZD	eb	AP6213A-50NLNPA	LVR-IC	LDO, 5.0V±2%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2ZD	ec	AP6213A-50NLNGA1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZD	ec	AP6213A-50NLNPA1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE	SOT-25	28cx	VR4	6kb	Anw
2ZD	eh	AP6213A-50NLNGP1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZD	eh	AP6213A-50NLNPP1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE	SC-70-5	28cx	VR4	6kb	Anw
2ZE	-	AP6213A-50UHFGP	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZE	-	AP6213A-50UHFPP	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2ZE	eb	AP6213A-50UHFGA	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZE	eb	AP6213A-50UHFPA	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2ZE	ec	AP6213A-50UHFGA1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZE	ec	AP6213A-50UHFPA1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2ZE	eh	AP6213A-50UHFGP1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZE	eh	AP6213A-50UHFPP1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2ZF	-	AP6213A-50ULFGP	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZF	-	AP6213A-50ULFPP	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2ZF	eb	AP6213A-50ULFGA	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZF	eb	AP6213A-50ULFPA	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2ZF	ec	AP6213A-50ULFGA1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZF	ec	AP6213A-50ULFPA1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2ZF	eh	AP6213A-50ULFGP1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZF	eh	AP6213A-50ULFPP1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2ZG	-	AP6213A-50UHNGP	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZG	-	AP6213A-50UHNPP	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2ZG	eb	AP6213A-50UHNGA	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZG	eb	AP6213A-50UHNPA	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2ZG	ec	AP6213A-50UHNGA1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZG	ec	AP6213A-50UHNPA1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2ZG	eh	AP6213A-50UHNGP1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZG	eh	AP6213A-50UHNPP1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2ZH	-	AP6213A-50ULNGP	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZH	-	AP6213A-50ULNPP	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2ZH	eb	AP6213A-50ULNGA	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZH	eb	AP6213A-50ULNPA	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2ZH	ec	AP6213A-50ULNGA1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZH	ec	AP6213A-50ULNPA1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
2ZH	eh	AP6213A-50ULNGP1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZH	eh	AP6213A-50ULNPP1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
2ZJ	-	AP6213A-50DHFGP	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZJ	-	AP6213A-50DHFPP	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2ZJ	eb	AP6213A-50DHFGA	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZJ	eb	AP6213A-50DHFPA	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2ZJ	ec	AP6213A-50DHFGA1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZJ	ec	AP6213A-50DHFPA1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2ZJ	eh	AP6213A-50DHFGP1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZJ	eh	AP6213A-50DHFPP1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2ZK	-	AP6213A-50DLFGP	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZK	-	AP6213A-50DLFPP	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2ZK	eb	AP6213A-50DLFGA	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZK	eb	AP6213A-50DLFPA	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2ZK	ec	AP6213A-50DLFGA1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZK	ec	AP6213A-50DLFPA1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR, CL fast	SOT-25	28cx	VR4	6kb	Anw
2ZK	eh	AP6213A-50DLFGP1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZK	eh	AP6213A-50DLFPP1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR, CL fast	SC-70-5	28cx	VR4	6kb	Anw
2ZL	-	AP6213A-50DHNGP	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZL	-	AP6213A-50DHNPP	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2ZL	eb	AP6213A-50DHNGA	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZL	eb	AP6213A-50DHNPA	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2ZL	ec	AP6213A-50DHNGA1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZL	ec	AP6213A-50DHNPA1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2ZL	eh	AP6213A-50DHNGP1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZL	eh	AP6213A-50DHNPP1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2ZM	-	AP6213A-50DLNGP	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZM	-	AP6213A-50DLNPP	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
2ZM	eb	AP6213A-50DLNGA	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZM	eb	AP6213A-50DLNPA	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2ZM	ec	AP6213A-50DLNGA1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
2ZM	ec	AP6213A-50DLNPA1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
2ZM	eh	AP6213A-50DLNGP1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
2ZM	eh	AP6213A-50DLNPP1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
30	-	R1223N152F	DC-DC-IC	PWM/VFM step-down, +CE, 1.5V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
30	-	RN5RF30AA	LVR-IC	LRip, -CE, 3V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
30	-	RN5RZ30AA	LVR-IC	LDO, LN, 3V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
30	-	XC62EP3002MR-G	LVR-IC	LDO, boosted, 3.0V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
30	ea	XC62ER3002MR-G	LVR-IC	LDO, boosted, 3.0V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
30-	-	XC62HR3002MR-G	LVR-IC	LDO, 3.0V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
300	ej	XC6104A131MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
300AC	-	BL8509-300ACRN	Vdet-IC	3.0V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
300AC	-	LC9009CB5TR300AC	Vdet-IC	3.0V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
300AN	-	BL8509-300ANRN	Vdet-IC	3.0V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
300AN	-	LC9009CB5TR300AN	Vdet-IC	3.0V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
300BC	-	BL8509-300BCRN	Vdet-IC	3.0V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
300BC	-	LC9009CB5TR300BC	Vdet-IC	3.0V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
300BN	-	BL8509-300BNRN	Vdet-IC	3.0V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
300BN	-	LC9009CB5TR300BN	Vdet-IC	3.0V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
300CC	-	BL8509-300CCRN	Vdet-IC	3.0V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
300CC	-	LC9009CB5TR300CC	Vdet-IC	3.0V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
300CN	-	BL8509-300CNRN	Vdet-IC	3.0V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
300CN	-	LC9009CB5TR300CN	Vdet-IC	3.0V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
300DC	-	BL8509-300DCRN	Vdet-IC	3.0V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
300DC	-	LC9009CB5TR300DC	Vdet-IC	3.0V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
300DN	-	BL8509-300DNRN	Vdet-IC	3.0V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
300DN	-	LC9009CB5TR300DN	Vdet-IC	3.0V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
300EC	-	BL8509-300ECRN	Vdet-IC	3.0V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
300EC	-	LC9009CB5TR300EC	Vdet-IC	3.0V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
300EN	-	BL8509-300ENRN	Vdet-IC	3.0V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
300EN	-	LC9009CB5TR300EN	Vdet-IC	3.0V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
300FC	-	BL8509-300FCRN	Vdet-IC	3.0V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
300FC	-	LC9009CB5TR300FC	Vdet-IC	3.0V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
300FN	-	BL8509-300FNRN	Vdet-IC	3.0V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
300FN	-	LC9009CB5TR300FN	Vdet-IC	3.0V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
300GC	-	BL8509-300GCRN	Vdet-IC	3.0V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
300GC	-	LC9009CB5TR300GC	Vdet-IC	3.0V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
300GN	-	BL8509-300GNRN	Vdet-IC	3.0V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
300GN	-	LC9009CB5TR300GN	Vdet-IC	3.0V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
301	eb	XC6403AA01M	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
301	ej	XC6104A132MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
302	eb	XC6403AA02M	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
302	ej	XC6104A133MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
3025	-	LC3030CB5TR25	DC-DC-IC	PFM, step-up, 2.5V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3026	-	LC3030CB5TR26	DC-DC-IC	PFM, step-up, 2.6V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3027	-	LC3030CB5TR27	DC-DC-IC	PFM, step-up, 2.7V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3028	-	LC3030CB5TR28	DC-DC-IC	PFM, step-up, 2.8V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3029	-	LC3030CB5TR29	DC-DC-IC	PFM, step-up, 2.9V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
303	eb	XC6403AA03M	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
303	ej	XC6104A134MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3030	-	LC3030CB5TR30	DC-DC-IC	PFM, step-up, 3.0V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3031	-	LC3030CB5TR31	DC-DC-IC	PFM, step-up, 3.1V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3032	-	LC3030CB5TR32	DC-DC-IC	PFM, step-up, 3.2V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3033	-	LC3030CB5TR33	DC-DC-IC	PFM, step-up, 3.3V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3034	-	LC3030CB5TR34	DC-DC-IC	PFM, step-up, 3.4V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3035	-	LC3030CB5TR35	DC-DC-IC	PFM, step-up, 3.5V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3036	-	LC3030CB5TR36	DC-DC-IC	PFM, step-up, 3.6V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3037	-	LC3030CB5TR37	DC-DC-IC	PFM, step-up, 3.7V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3038	-	LC3030CB5TR38	DC-DC-IC	PFM, step-up, 3.8V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3039	-	LC3030CB5TR39	DC-DC-IC	PFM, step-up, 3.9V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
304	eb	XC6403AA04M	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
304	ej	XC6104A135MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
3040	-	LC3030CB5TR40	DC-DC-IC	PFM, step-up, 4.0V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3041	-	LC3030CB5TR41	DC-DC-IC	PFM, step-up, 4.1V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3042	-	LC3030CB5TR42	DC-DC-IC	PFM, step-up, 4.2V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3043	-	LC3030CB5TR43	DC-DC-IC	PFM, step-up, 4.3V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3044	-	LC3030CB5TR44	DC-DC-IC	PFM, step-up, 4.4V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3045	-	LC3030CB5TR45	DC-DC-IC	PFM, step-up, 4.5V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3046	-	LC3030CB5TR46	DC-DC-IC	PFM, step-up, 4.6V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3047	-	LC3030CB5TR47	DC-DC-IC	PFM, step-up, 4.7V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3048	-	LC3030CB5TR48	DC-DC-IC	PFM, step-up, 4.8V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3049	-	LC3030CB5TR49	DC-DC-IC	PFM, step-up, 4.9V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
305	eb	XC6403AA05M	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
305	ej	XC6104A136MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
3050	-	LC3030CB5TR50	DC-DC-IC	PFM, step-up, 5.0V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3051	-	LC3030CB5TR51	DC-DC-IC	PFM, step-up, 5.1V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3052	-	LC3030CB5TR52	DC-DC-IC	PFM, step-up, 5.2V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3053	-	LC3030CB5TR53	DC-DC-IC	PFM, step-up, 5.3V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3054	-	LC3030CB5TR54	DC-DC-IC	PFM, step-up, 5.4V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3055	-	LC3030CB5TR55	DC-DC-IC	PFM, step-up, 5.5V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3056	-	LC3030CB5TR56	DC-DC-IC	PFM, step-up, 5.6V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3057	-	LC3030CB5TR57	DC-DC-IC	PFM, step-up, 5.7V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3058	-	LC3030CB5TR58	DC-DC-IC	PFM, step-up, 5.8V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
3059	-	LC3030CB5TR59	DC-DC-IC	PFM, step-up, 5.9V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
306	eb	XC6403AA06M	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
306	ej	XC6104A137MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
3060	-	LC3030CB5TR60	DC-DC-IC	PFM, step-up, 6.0V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6a	Lch
307	eb	XC6403AA07M	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
307	ej	XC6104A138MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
308	eb	XC6403AA08M	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
308	ej	XC6104A139MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
309	-	R3112N091C	Vdet-IC	0.91V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
309	eb	XC6403AA09M	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
309	ej	XC6104A140MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30A	-	AAT60030A-S5	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
30A	-	KIC3210T-030	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	TSV	28vrx	VR7	6l	Kec
30A	ej	XC6104A141MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30-A	-	UTC8130-A	Vdet-IC	3.0V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
30B	-	AAT60030B-S5	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
30B	ej	XC6104A142MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30-B	-	UTC8130-B	Vdet-IC	3.0V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
30C	-	AAT60030C-S5	Vdet-IC	3.0V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
30C	ej	XC6104A143MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30D	-	AAT60030D-S5	Vdet-IC	3.0V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
30D	ej	XC6104A144MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30E	ej	XC6104A145MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30F	ec	XC6104A116MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30F	ej	XC6104A146MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30H	ec	XC6104A117MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30H	ej	XC6104A147MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30K	-	TK71730S	LVR-IC	LDO, 3.0V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
30K	ec	XC6104A118MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30K	ej	XC6104A148MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30L	-	TK71630ASCL	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
30L	ec	XC6104A119MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30L	ej	XC6104A149MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30M	ec	XC6104A120MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30M	ej	XC6104A150MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30N	ec	XC6104A121MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30P	ec	XC6104A122MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
30R	ec	XC6104A123MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30S	ec	XC6104A124MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30T	-	TK71430S	LVR-IC	LDO, 3.0V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
30T	ec	XC6104A125MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30U	-	TK61030S	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Tok
30U	ec	XC6104A126MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30V	ec	XC6104A127MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30X	ec	XC6104A128MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30Y	ec	XC6104A129MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
30Z	ec	XC6104A130MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31	-	R1223N182F	DC-DC-IC	PWM/VFM step-down, +CE, 1.8V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
31	-	RN5RF31AA	LVR-IC	LRip, -CE, 3.1V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
31	-	RN5RZ31AA	LVR-IC	LDO, LN, 3.1V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
31	-	XC62EP3102MR-G	LVR-IC	LDO, boosted, 3.1V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
31	ea	XC62ER3102MR-G	LVR-IC	LDO, boosted, 3.1V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
31-	-	XC62HR3102MR-G	LVR-IC	LDO, 3.1V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
310	-	R3112N101C	Vdet-IC	1.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
310	eb	XC6403AA10M	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
310	ej	XC6104A231MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
310AC	-	BL8509-310ACRN	Vdet-IC	3.1V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
310AC	-	LC9009CB5TR310AC	Vdet-IC	3.1V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
310AN	-	BL8509-310ANRN	Vdet-IC	3.1V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
310AN	-	LC9009CB5TR310AN	Vdet-IC	3.1V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
310BC	-	BL8509-310BCRN	Vdet-IC	3.1V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
310BC	-	LC9009CB5TR310BC	Vdet-IC	3.1V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
310BN	-	BL8509-310BNRN	Vdet-IC	3.1V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
310BN	-	LC9009CB5TR310BN	Vdet-IC	3.1V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
310CC	-	BL8509-310CCRN	Vdet-IC	3.1V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
310CC	-	LC9009CB5TR310CC	Vdet-IC	3.1V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
310CN	-	BL8509-310CNRN	Vdet-IC	3.1V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
310CN	-	LC9009CB5TR310CN	Vdet-IC	3.1V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
310DC	-	BL8509-310DCRN	Vdet-IC	3.1V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
310DC	-	LC9009CB5TR310DC	Vdet-IC	3.1V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
310DN	-	BL8509-310DNRN	Vdet-IC	3.1V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
310DN	-	LC9009CB5TR310DN	Vdet-IC	3.1V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
310EC	-	BL8509-310ECRN	Vdet-IC	3.1V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
310EC	-	LC9009CB5TR310EC	Vdet-IC	3.1V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
310EN	-	BL8509-310ENRN	Vdet-IC	3.1V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
310EN	-	LC9009CB5TR310EN	Vdet-IC	3.1V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
310FC	-	BL8509-310FCRN	Vdet-IC	3.1V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
310FC	-	LC9009CB5TR310FC	Vdet-IC	3.1V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
310FN	-	BL8509-310FNRN	Vdet-IC	3.1V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
310FN	-	LC9009CB5TR310FN	Vdet-IC	3.1V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
310GC	-	BL8509-310GCRN	Vdet-IC	3.1V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
310GC	-	LC9009CB5TR310GC	Vdet-IC	3.1V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
310GN	-	BL8509-310GNRN	Vdet-IC	3.1V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
310GN	-	LC9009CB5TR310GN	Vdet-IC	3.1V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
311	-	R3112N111C	Vdet-IC	1.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
311	eb	XC6403AA11M	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
311	ej	XC6104A232MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
312	-	R3112N121C	Vdet-IC	1.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
312	eb	XC6403AA12M	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
312	ej	XC6104A233MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
313	-	R3112N131C	Vdet-IC	1.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
313	eb	XC6403AA13M	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
313	ej	XC6104A234MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
314	-	R3112N141C	Vdet-IC	1.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
314	eb	XC6403AA14M	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
314	ej	XC6104A235MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
315	-	R3112N151C	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
315	eb	XC6403AA15M	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
315	ej	XC6104A236MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
316	-	R3112N161C	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
316	eb	XC6403AA16M	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
316	ej	XC6104A237MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
317	-	R3112N171C	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
317	eb	XC6403AA17M	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
317	ej	XC6104A238MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
318	-	R3112N181C	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
318	eb	XC6403AA18M	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
318	ej	XC6104A239MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
319	-	R3112N191C	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
319	ej	XC6104A240MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31A	-	AAT60031A-S5	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
31A	-	KIC3210T-031	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	TSV	28vrx	VR7	6l	Kec
31A	ej	XC6104A241MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31-A	-	UTC8131-A	Vdet-IC	3.1V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
31B	-	AAT60031B-S5	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
31B	ej	XC6104A242MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31-B	-	UTC8131-B	Vdet-IC	3.1V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
31C	-	AAT60031C-S5	Vdet-IC	3.1V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
31C	-	TK11031M	Tdet-IC	Sensor (-30 to + 105°C), 10mV/°C, 4.5..10V	SOT-23-5	28	-	6a	Tok
31C	ej	XC6104A243MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31D	-	AAT60031D-S5	Vdet-IC	3.1V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
31D	ej	XC6104A244MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31E	ej	XC6104A245MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31F	-	R1163N151E	LVR-IC	LDO, 1.5V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
31F	ec	XC6104A216MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31F	ej	XC6104A246MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31G	-	R1163N161E	LVR-IC	LDO, 1.6V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
31H	-	R1163N171E	LVR-IC	LDO, 1.7V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
31H	ec	XC6104A217MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31H	ej	XC6104A247MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31J	-	R1163N181E5	LVR-IC	LDO, 1.85V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
31K	-	R1163N191E	LVR-IC	LDO, 1.9V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
31K	-	TK71731S	LVR-IC	LDO, 3.1V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
31K	ec	XC6104A218MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31K	ej	XC6104A248MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31L	-	TK71631ASCL	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
31L	ec	XC6104A219MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31L	ej	XC6104A249MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31M	ec	XC6104A220MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31M	ej	XC6104A250MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31N	ec	XC6104A221MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31P	ec	XC6104A222MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31R	ec	XC6104A223MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31S	ec	XC6104A224MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31T	-	TK71431S	LVR-IC	LDO, 3.1V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
31T	ec	XC6104A225MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31U	ec	XC6104A226MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31V	ec	XC6104A227MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31X	ec	XC6104A228MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31Y	ec	XC6104A229MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
31Z	ec	XC6104A230MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32	-	R1223N252F	DC-DC-IC	PWM/VFM step-down, +CE, 2.5V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
32	-	RN5RF32AA	LVR-IC	LRip, -CE, 3.2V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
32	-	RN5RZ32AA	LVR-IC	LDO, LN, 3.2V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
32	-	XC62EP3202MR-G	LVR-IC	LDO, boosted, 3.2V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
32	ea	XC62ER3202MR-G	LVR-IC	LDO, boosted, 3.2V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
32-	-	XC62HR3202MR-G	LVR-IC	LDO, 3.2V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
320	-	R3112N201C	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
320	eb	XC6403AA20M	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
320	ej	XC6104A331MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
320AC	-	BL8509-320ACRN	Vdet-IC	3.2V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
320AC	-	LC9009CB5TR320AC	Vdet-IC	3.2V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
320AN	-	BL8509-320ANRN	Vdet-IC	3.2V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
320AN	-	LC9009CB5TR320AN	Vdet-IC	3.2V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
320BC	-	BL8509-320BCRN	Vdet-IC	3.2V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
320BC	-	LC9009CB5TR320BC	Vdet-IC	3.2V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
320BN	-	BL8509-320BNRN	Vdet-IC	3.2V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
320BN	-	LC9009CB5TR320BN	Vdet-IC	3.2V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
320CC	-	BL8509-320CCRN	Vdet-IC	3.2V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
320CC	-	LC9009CB5TR320CC	Vdet-IC	3.2V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
320CN	-	BL8509-320CNRN	Vdet-IC	3.2V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
320CN	-	LC9009CB5TR320CN	Vdet-IC	3.2V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
320DC	-	BL8509-320DCRN	Vdet-IC	3.2V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
320DC	-	LC9009CB5TR320DC	Vdet-IC	3.2V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
320DN	-	BL8509-320DNRN	Vdet-IC	3.2V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
320DN	-	LC9009CB5TR320DN	Vdet-IC	3.2V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
320EC	-	BL8509-320ECRN	Vdet-IC	3.2V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
320EC	-	LC9009CB5TR320EC	Vdet-IC	3.2V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
320EN	-	BL8509-320ENRN	Vdet-IC	3.2V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
320EN	-	LC9009CB5TR320EN	Vdet-IC	3.2V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
320FC	-	BL8509-320FCRN	Vdet-IC	3.2V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
320FC	-	LC9009CB5TR320FC	Vdet-IC	3.2V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
320FN	-	BL8509-320FNRN	Vdet-IC	3.2V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
320FN	-	LC9009CB5TR320FN	Vdet-IC	3.2V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
320GC	-	BL8509-320GCRN	Vdet-IC	3.2V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
320GC	-	LC9009CB5TR320GC	Vdet-IC	3.2V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
320GN	-	BL8509-320GNRN	Vdet-IC	3.2V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
320GN	-	LC9009CB5TR320GN	Vdet-IC	3.2V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
321	-	R3112N211C	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
321	eb	XC6403AA21M	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
321	ej	XC6104A332MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
322	-	R3112N221C	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
322	eb	XC6403AA22M	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
322	ej	XC6104A333MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
323	-	R3112N231C	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
323	ej	XC6104A334MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
324	-	R3112N241C	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
324	eb	XC6403AA24M	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
324	ej	XC6104A335MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
325	-	R3112N251C	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
325	eb	XC6403AA25M	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
325	ej	XC6104A336MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
326	-	R3112N261C	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
326	ej	XC6104A337MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
327	-	R3112N271C	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
327	ej	XC6104A338MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
328	-	R3112N281C	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
328	ej	XC6104A339MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
329	-	R3112N291C	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
329	ej	XC6104A340MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32A	-	AAT60032A-S5	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
32A	-	KIC3210T-032	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	TSV	28vrx	VR7	6l	Kec
32A	-	R1163N201E	LVR-IC	LDO, 2.0V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
32A	-	SP432AS25RG	Vref-IC	Precision, Shunt, adjustable 1.24...20V±0.5%	SOT-23-5L	28re	RF1	6k	Syn
32A	-	SP432AS35RG	Vref-IC	Precision, Shunt, adjustable 1.24...20V±0.5%	SOT-353	28gh	RF1	6k	Syn
32A	ej	XC6104A341MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32-A	-	UTC8132-A	Vdet-IC	3.2V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
32B	-	AAT60032B-S5	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
32B	-	R1163N211E	LVR-IC	LDO, 2.1V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
32B	-	SP432BS25RG	Vref-IC	Precision, Shunt, adjustable 1.24...20V±1.0%	SOT-23-5L	28re	RF1	6k	Syn
32B	-	SP432BS35RG	Vref-IC	Precision, Shunt, adjustable 1.24...20V±1.0%	SOT-353	28re	RF1	6k	Syn
32B	ej	XC6104A342MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32-B	-	UTC8132-B	Vdet-IC	3.2V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
32C	-	AAT60032C-S5	Vdet-IC	3.2V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
32C	-	R1163N221E	LVR-IC	LDO, 2.2V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
32C	-	TK11032M	Tdet-IC	Sensor (-30 to + 105°C), 6mV/°C, 2.7..10V	SOT-23-5	28	-	6a	Tok
32C	ej	XC6104A343MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32D	-	AAT60032D-S5	Vdet-IC	3.2V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
32D	-	R1163N231E	LVR-IC	LDO, 2.3V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
32D	ej	XC6104A344MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32E	-	R1163N241E	LVR-IC	LDO, 2.4V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
32E	ej	XC6104A345MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32F	-	R1163N251E	LVR-IC	LDO, 2.5V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
32F	ec	XC6104A316MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32F	ej	XC6104A346MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32G	-	R1163N261E	LVR-IC	LDO, 2.6V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
32H	-	R1163N271E	LVR-IC	LDO, 2.7V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
32H	ec	XC6104A317MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32H	ej	XC6104A347MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32J	-	R1163N281E5	LVR-IC	LDO, 2.85V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
32K	-	R1163N291E	LVR-IC	LDO, 2.9V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
32K	-	TK71732S	LVR-IC	LDO, 3.2V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
32K	ec	XC6104A318MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32K	ej	XC6104A348MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32L	-	TK71632ASCL	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
32L	ec	XC6104A319MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32L	ej	XC6104A349MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
32M	ec	XC6104A320MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32M	ej	XC6104A350MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32N	ec	XC6104A321MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32P	ec	XC6104A322MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32R	ec	XC6104A323MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32S	ec	XC6104A324MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32T	-	TK71432S	LVR-IC	LDO, 3.2V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
32T	ec	XC6104A325MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32U	ec	XC6104A326MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32V	ec	XC6104A327MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32X	ec	XC6104A328MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32Y	ec	XC6104A329MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
32Z	ec	XC6104A330MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33	-	R1223N302F	DC-DC-IC	PWM/VFM step-down, +CE, 3V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
33	-	RN5RF33AA	LVR-IC	LRip, -CE, 3.3V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
33	-	RN5RZ33AA	LVR-IC	LDO, LN, 3.3V±2%, 100mA	SOT-23-5	28vrt	VR4	6g	Ric
33	-	XC62EP3302MR-G	LVR-IC	LDO, boosted, 3.3V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
33	ea	XC62ER3302MR-G	LVR-IC	LDO, boosted, 3.3V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
33-	-	XC62HR3302MR-G	LVR-IC	LDO, 3.3V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
330	-	R3112N301C	Vdet-IC	3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
330	eb	XC6403AA30M	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
330	ej	XC6104A431MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
330AC	-	BL8509-330ACRN	Vdet-IC	3.3V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
330AC	-	LC9009CB5TR330AC	Vdet-IC	3.3V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
330AN	-	BL8509-330ANRN	Vdet-IC	3.3V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
330AN	-	LC9009CB5TR330AN	Vdet-IC	3.3V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
330BC	-	BL8509-330BCRN	Vdet-IC	3.3V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
330BC	-	LC9009CB5TR330BC	Vdet-IC	3.3V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
330BN	-	BL8509-330BNRN	Vdet-IC	3.3V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
330BN	-	LC9009CB5TR330BN	Vdet-IC	3.3V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
330CC	-	BL8509-330CCRN	Vdet-IC	3.3V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
330CC	-	LC9009CB5TR330CC	Vdet-IC	3.3V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
330CN	-	BL8509-330CNRN	Vdet-IC	3.3V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
330CN	-	LC9009CB5TR330CN	Vdet-IC	3.3V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
330DC	-	BL8509-330DCRN	Vdet-IC	3.3V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
330DC	-	LC9009CB5TR330DC	Vdet-IC	3.3V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
330DN	-	BL8509-330DNRN	Vdet-IC	3.3V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
330DN	-	LC9009CB5TR330DN	Vdet-IC	3.3V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
330EC	-	BL8509-330ECRN	Vdet-IC	3.3V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
330EC	-	LC9009CB5TR330EC	Vdet-IC	3.3V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
330EN	-	BL8509-330ENRN	Vdet-IC	3.3V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
330EN	-	LC9009CB5TR330EN	Vdet-IC	3.3V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
330FC	-	BL8509-330FCRN	Vdet-IC	3.3V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
330FC	-	LC9009CB5TR330FC	Vdet-IC	3.3V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
330FN	-	BL8509-330FNRN	Vdet-IC	3.3V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
330FN	-	LC9009CB5TR330FN	Vdet-IC	3.3V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
330GC	-	BL8509-330GCRN	Vdet-IC	3.3V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
330GC	-	LC9009CB5TR330GC	Vdet-IC	3.3V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
330GN	-	BL8509-330GNRN	Vdet-IC	3.3V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
330GN	-	LC9009CB5TR330GN	Vdet-IC	3.3V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
331	-	R3112N311C	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
331	eb	XC6403AA31M	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
331	ej	XC6104A432MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
332	-	R3112N321C	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
332	eb	XC6403AA32M	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
332	ej	XC6104A433MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
333	-	R3112N331C	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
333	eb	XC6403AA33M	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
333	ej	XC6104A434MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
334	-	R1126N341D	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE, CL	SOT-23-5	28vc	VR4	6g	Ric
334	-	R3112N341C	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
334	eb	XC6403AA34M	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
334	ej	XC6104A435MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
335	-	R1126N351D	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE, CL	SOT-23-5	28vc	VR4	6g	Ric
335	-	R3112N351C	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
335	ej	XC6104A436MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
336	-	R1126N361D	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE, CL	SOT-23-5	28vc	VR4	6g	Ric
336	-	R3112N361C	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
336	ej	XC6104A437MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
337	-	R1126N371D	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE, CL	SOT-23-5	28vc	VR4	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
337	-	R3112N371C	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
337	ej	XC6104A438MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
338	-	R1126N381D	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE, CL	SOT-23-5	28vc	VR4	6g	Ric
338	-	R3112N381C	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
338	ej	XC6104A439MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
339	-	R1126N391D	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE, CL	SOT-23-5	28vc	VR4	6g	Ric
339	-	R3112N391C	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
339	ej	XC6104A440MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33A	-	AAT60033A-S5	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
33A	-	KIC3210T-033	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	TSV	28vrx	VR7	6l	Kec
33A	-	R1163N301E	LVR-IC	LDO, 3.0V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
33A	ej	XC6104A441MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33-A	-	UTC8133-A	Vdet-IC	3.3V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
33B	-	AAT60033B-S5	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
33B	-	R1163N311E	LVR-IC	LDO, 3.1V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
33B	ej	XC6104A442MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33-B	-	UTC8133-B	Vdet-IC	3.3V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
33C	-	AAT60033C-S5	Vdet-IC	3.3V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
33C	-	R1163N321E	LVR-IC	LDO, 3.2V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
33C	-	TK11033M	Tdet-IC	Sensor (-30 to + 105°C), 5mV/°C, 2.4..10V	SOT-23-5	28	-	6a	Tok
33C	ej	XC6104A443MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33D	-	AAT60033D-S5	Vdet-IC	3.3V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
33D	-	R1163N331E	LVR-IC	LDO, 3.3V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
33D	ej	XC6104A444MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33E	-	R1163N341E	LVR-IC	LDO, 3.4V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
33E	ej	XC6104A445MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33F	-	R1163N351E	LVR-IC	LDO, 3.5V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
33F	ec	XC6104A416MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33F	ej	XC6104A446MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33G	-	R1163N361E	LVR-IC	LDO, 3.6V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
33H	-	R1163N371E	LVR-IC	LDO, 3.7V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
33H	ec	XC6104A417MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33H	ej	XC6104A447MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33J	-	R1163N381E	LVR-IC	LDO, 3.8V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
33K	-	R1163N391E	LVR-IC	LDO, 3.9V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
33K	-	TK71733S	LVR-IC	LDO, 3.3V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
33K	ec	XC6104A418MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33K	ej	XC6104A448MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33L	-	TK71633ASCL	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
33L	ec	XC6104A419MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33L	ej	XC6104A449MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33M	ec	XC6104A420MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33M	ej	XC6104A450MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33N	ec	XC6104A421MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33P	ec	XC6104A422MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33R	ec	XC6104A423MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33S	ec	XC6104A424MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33T	-	TK71433S	LVR-IC	LDO, 3.3V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
33T	ec	XC6104A425MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33U	-	TK61033S	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Tok
33U	ec	XC6104A426MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33V	ec	XC6104A427MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33X	ec	XC6104A428MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33Y	ec	XC6104A429MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
33Z	ec	XC6104A430MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34	-	R1223N332F	DC-DC-IC	PWM/VFM step-down, +CE, 3.3V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
34	-	RN5RF34AA	LVR-IC	LRip, -CE, 3.4V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
34	-	RN5RZ34AA	LVR-IC	LDO, LN, 3.4V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
34	-	XC62EP3402MR-G	LVR-IC	LDO, boosted, 3.4V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
34	ea	XC62ER3402MR-G	LVR-IC	LDO, boosted, 3.4V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
34-	-	XC62HR3402MR-G	LVR-IC	LDO, 3.4V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
340	-	R1126N401D	LVR-IC	LDO, Low noise, 4V±2%, 150mA, +CE, CL	SOT-23-5	28vc	VR4	6g	Ric
340	-	R3112N401C	Vdet-IC	4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
340	ej	XC6104A531MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
340AC	-	BL8509-340ACRN	Vdet-IC	3.4V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
340AC	-	LC9009CB5TR340AC	Vdet-IC	3.4V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
340AN	-	BL8509-340ANRN	Vdet-IC	3.4V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
340AN	-	LC9009CB5TR340AN	Vdet-IC	3.4V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
340BC	-	BL8509-340BCRN	Vdet-IC	3.4V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
340BC	-	LC9009CB5TR340BC	Vdet-IC	3.4V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
340BN	-	BL8509-340BNRN	Vdet-IC	3.4V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
340BN	-	LC9009CB5TR340BN	Vdet-IC	3.4V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
340CC	-	BL8509-340CCRN	Vdet-IC	3.4V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
340CC	-	LC9009CB5TR340CC	Vdet-IC	3.4V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
340CN	-	BL8509-340CNRN	Vdet-IC	3.4V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
340CN	-	LC9009CB5TR340CN	Vdet-IC	3.4V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
340DC	-	BL8509-340DCRN	Vdet-IC	3.4V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
340DC	-	LC9009CB5TR340DC	Vdet-IC	3.4V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
340DN	-	BL8509-340DNRN	Vdet-IC	3.4V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
340DN	-	LC9009CB5TR340DN	Vdet-IC	3.4V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
340EC	-	BL8509-340ECRN	Vdet-IC	3.4V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
340EC	-	LC9009CB5TR340EC	Vdet-IC	3.4V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
340EN	-	BL8509-340ENRN	Vdet-IC	3.4V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
340EN	-	LC9009CB5TR340EN	Vdet-IC	3.4V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
340FC	-	BL8509-340FCRN	Vdet-IC	3.4V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
340FC	-	LC9009CB5TR340FC	Vdet-IC	3.4V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
340FN	-	BL8509-340FNRN	Vdet-IC	3.4V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
340FN	-	LC9009CB5TR340FN	Vdet-IC	3.4V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
340GC	-	BL8509-340GCRN	Vdet-IC	3.4V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
340GC	-	LC9009CB5TR340GC	Vdet-IC	3.4V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
340GN	-	BL8509-340GNRN	Vdet-IC	3.4V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
340GN	-	LC9009CB5TR340GN	Vdet-IC	3.4V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
341	-	R1126N181D5	LVR-IC	LDO, Low noise, 1.85V±2%, 150mA, +CE, CL	SOT-23-5	28vc	VR4	6g	Ric
341	-	R3112N411C	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
341	ej	XC6104A532MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
342	-	R1126N281D5	LVR-IC	LDO, Low noise, 2.85V±2%, 150mA, +CE, CL	SOT-23-5	28vc	VR4	6g	Ric
342	-	R3112N421C	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
342	ej	XC6104A533MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
343	-	R3112N431C	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
343	ej	XC6104A534MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
344	-	R3112N441C	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
344	ej	XC6104A535MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
345	-	R3112N451C	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
345	ej	XC6104A536MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
346	-	R3112N461C	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
346	ej	XC6104A537MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
347	-	R3112N471C	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
347	ej	XC6104A538MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
348	-	R3112N481C	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
348	ej	XC6104A539MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
349	-	R3112N491C	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
349	ej	XC6104A540MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34A	-	AAT60034A-S5	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
34A	-	AP6233A-10NHFGP	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34A	-	AP6233A-10NHFPP	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
34A	-	KIC3210T-034	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	TSV	28vrx	VR7	6l	Kec
34A	-	R1163N401E	LVR-IC	LDO, 4.0V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
34A	eb	AP6233A-10NHFGA	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34A	eb	AP6233A-10NHFPA	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
34A	ec	AP6233A-10NHFGA1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34A	ec	AP6233A-10NHFPA1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
34A	eh	AP6233A-10NHFGP1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34A	eh	AP6233A-10NHFPP1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
34A	ej	XC6104A541MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34-A	-	UTC8134-A	Vdet-IC	3.4V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
34B	-	AAT60034B-S5	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
34B	-	AP6233A-10NLFGP	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34B	-	AP6233A-10NLFPP	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
34B	-	R1163N181E	LVR-IC	LDO, 1.8V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
34B	eb	AP6233A-10NLFGA	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34B	eb	AP6233A-10NLFPA	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
34B	ec	AP6233A-10NLFGA1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34B	ec	AP6233A-10NLFPA1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
34B	eh	AP6233A-10NLFGP1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34B	eh	AP6233A-10NLFPP1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
34B	ej	XC6104A542MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34-B	-	UTC8134-B	Vdet-IC	3.4V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
34C	-	AAT60034C-S5	Vdet-IC	3.4V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
34C	-	AP6233A-10NHNGP	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34C	-	AP6233A-10NHNPP	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
34C	-	R1163N281E	LVR-IC	LDO, 2.8V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
34C	eb	AP6233A-10NHNGA	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34C	eb	AP6233A-10NHNPA	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
34C	ec	AP6233A-10NHNGA1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34C	ec	AP6233A-10NHNPA1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
34C	eh	AP6233A-10NHNGP1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34C	eh	AP6233A-10NHNPP1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
34C	ej	XC6104A543MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34D	-	AAT60034D-S5	Vdet-IC	3.4V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
34D	-	AP6233A-10NLNGP	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34D	-	AP6233A-10NLNPP	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
34D	eb	AP6233A-10NLNGA	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34D	eb	AP6233A-10NLNPA	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
34D	ec	AP6233A-10NLNGA1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34D	ec	AP6233A-10NLNPA1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
34D	eh	AP6233A-10NLNGP1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34D	eh	AP6233A-10NLNPP1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
34D	ej	XC6104A544MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34E	-	AP6233A-10UHFGP	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34E	-	AP6233A-10UHFPP	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
34E	eb	AP6233A-10UHFGA	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34E	eb	AP6233A-10UHFPA	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
34E	ec	AP6233A-10UHFGA1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34E	ec	AP6233A-10UHFPA1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
34E	eh	AP6233A-10UHFGP1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34E	eh	AP6233A-10UHFPP1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
34E	ej	XC6104A545MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34F	-	AP6233A-10ULFGP	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34F	-	AP6233A-10ULFPP	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
34F	eb	AP6233A-10ULFGA	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34F	eb	AP6233A-10ULFPA	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
34F	ec	AP6233A-10ULFGA1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34F	ec	AP6233A-10ULFPA1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
34F	ec	XC6104A516MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34F	eh	AP6233A-10ULFGP1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34F	eh	AP6233A-10ULFPP1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
34F	ej	XC6104A546MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34G	-	AP6233A-10UHNGP	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34G	-	AP6233A-10UHNPP	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
34G	eb	AP6233A-10UHNGA	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34G	eb	AP6233A-10UHNPA	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
34G	ec	AP6233A-10UHNGA1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34G	ec	AP6233A-10UHNPA1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
34G	eh	AP6233A-10UHNGP1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34G	eh	AP6233A-10UHNPP1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
34H	-	AP6233A-10ULNGP	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34H	-	AP6233A-10ULNPP	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
34H	eb	AP6233A-10ULNGA	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34H	eb	AP6233A-10ULNPA	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
34H	ec	AP6233A-10ULNGA1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34H	ec	AP6233A-10ULNPA1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
34H	ec	XC6104A517MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34H	eh	AP6233A-10ULNGP1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34H	eh	AP6233A-10ULNPP1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
34H	ej	XC6104A547MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34J	-	AP6233A-10DHFGP	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34J	-	AP6233A-10DHFPP	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
34J	eb	AP6233A-10DHFGA	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34J	eb	AP6233A-10DHFPA	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
34J	ec	AP6233A-10DHFGA1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34J	ec	AP6233A-10DHFPA1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
34J	eh	AP6233A-10DHFGP1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34J	eh	AP6233A-10DHFPP1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
34K	-	AP6233A-10DLFGP	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34K	-	AP6233A-10DLFPP	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
34K	-	TK71734S	LVR-IC	LDO, 3.4V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
34K	eb	AP6233A-10DLFGA	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34K	eb	AP6233A-10DLFPA	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
34K	ec	AP6233A-10DLFGA1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34K	ec	AP6233A-10DLFPA1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
34K	ec	XC6104A518MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34K	eh	AP6233A-10DLFGP1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34K	eh	AP6233A-10DLFPP1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
34K	ej	XC6104A548MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34L	-	AP6233A-10DHNGP	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34L	-	AP6233A-10DHNPP	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
34L	-	TK71634ASCL	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
34L	eb	AP6233A-10DHNGA	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34L	eb	AP6233A-10DHNPA	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
34L	ec	AP6233A-10DHNGA1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34L	ec	AP6233A-10DHNPA1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
34L	ec	XC6104A519MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34L	eh	AP6233A-10DHNGP1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34L	eh	AP6233A-10DHNPP1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
34L	ej	XC6104A549MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34M	-	AP6233A-10DLNGP	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34M	-	AP6233A-10DLNPP	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
34M	eb	AP6233A-10DLNGA	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34M	eb	AP6233A-10DLNPA	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
34M	ec	AP6233A-10DLNGA1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
34M	ec	AP6233A-10DLNPA1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
34M	ec	XC6104A520MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34M	eh	AP6233A-10DLNGP1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
34M	eh	AP6233A-10DLNPP1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
34M	ej	XC6104A550MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34N	ec	XC6104A521MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34P	ec	XC6104A522MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34R	ec	XC6104A523MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34S	ec	XC6104A524MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34T	-	TK71434S	LVR-IC	LDO, 3.4V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
34T	ec	XC6104A525MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34U	ec	XC6104A526MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34V	ec	XC6104A527MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34X	ec	XC6104A528MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34Y	ec	XC6104A529MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
34Z	ec	XC6104A530MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35	-	R1223N502F	DC-DC-IC	PWM/VFM step-down, +CE, 5V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
35	-	RN5RF35AA	LVR-IC	LRip, -CE, 3.5V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
35	-	RN5RZ35AA	LVR-IC	LDO, LN, 3.5V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
35	-	XC62EP3502MR-G	LVR-IC	LDO, boosted, 3.5V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
35	ea	XC62ER3502MR-G	LVR-IC	LDO, boosted, 3.5V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
35-	-	XC62HR3502MR-G	LVR-IC	LDO, 3.5V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
350	-	R3112N501C	Vdet-IC	5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
350	ej	XC6104A631MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
350AC	-	BL8509-350ACRN	Vdet-IC	3.5V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
350AC	-	LC9009CB5TR350AC	Vdet-IC	3.5V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
350AN	-	BL8509-350ANRN	Vdet-IC	3.5V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
350AN	-	LC9009CB5TR350AN	Vdet-IC	3.5V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
350BC	-	BL8509-350BCRN	Vdet-IC	3.5V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
350BC	-	LC9009CB5TR350BC	Vdet-IC	3.5V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
350BN	-	BL8509-350BNRN	Vdet-IC	3.5V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
350BN	-	LC9009CB5TR350BN	Vdet-IC	3.5V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
350CC	-	BL8509-350CCRN	Vdet-IC	3.5V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
350CC	-	LC9009CB5TR350CC	Vdet-IC	3.5V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
350CN	-	BL8509-350CNRN	Vdet-IC	3.5V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
350CN	-	LC9009CB5TR350CN	Vdet-IC	3.5V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
350DC	-	BL8509-350DCRN	Vdet-IC	3.5V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
350DC	-	LC9009CB5TR350DC	Vdet-IC	3.5V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
350DN	-	BL8509-350DNRN	Vdet-IC	3.5V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
350DN	-	LC9009CB5TR350DN	Vdet-IC	3.5V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
350EC	-	BL8509-350ECRN	Vdet-IC	3.5V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
350EC	-	LC9009CB5TR350EC	Vdet-IC	3.5V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
350EN	-	BL8509-350ENRN	Vdet-IC	3.5V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
350EN	-	LC9009CB5TR350EN	Vdet-IC	3.5V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
350FC	-	BL8509-350FCRN	Vdet-IC	3.5V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
350FC	-	LC9009CB5TR350FC	Vdet-IC	3.5V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
350FN	-	BL8509-350FNRN	Vdet-IC	3.5V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
350FN	-	LC9009CB5TR350FN	Vdet-IC	3.5V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
350GC	-	BL8509-350GCRN	Vdet-IC	3.5V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
350GC	-	LC9009CB5TR350GC	Vdet-IC	3.5V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
350GN	-	BL8509-350GNRN	Vdet-IC	3.5V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
350GN	-	LC9009CB5TR350GN	Vdet-IC	3.5V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
351	ej	XC6104A632MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
352	ej	XC6104A633MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
353	ej	XC6104A634MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
354	ej	XC6104A635MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
355	ej	XC6104A636MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
356	ej	XC6104A637MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
357	ej	XC6104A638MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
358	ej	XC6104A639MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
359	ej	XC6104A640MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35A	-	AAT60035A-S5	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
35A	-	AP6233A-12NHFGP	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35A	-	AP6233A-12NHFPP	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
35A	-	KIC3210T-035	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	TSV	28vrx	VR7	6l	Kec
35A	eb	AP6233A-12NHFGA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35A	eb	AP6233A-12NHFPA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
35A	ec	AP6233A-12NHFGA1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35A	ec	AP6233A-12NHFPA1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
35A	eh	AP6233A-12NHFGP1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35A	eh	AP6233A-12NHFPP1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
35A	ej	XC6104A641MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35-A	-	UTC8135-A	Vdet-IC	3.5V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
35B	-	AAT60035B-S5	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
35B	-	AP6233A-12NLFGP	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35B	-	AP6233A-12NLFPP	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
35B	eb	AP6233A-12NLFGA	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35B	eb	AP6233A-12NLFPA	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
35B	ec	AP6233A-12NLFGA1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35B	ec	AP6233A-12NLFPA1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
35B	eh	AP6233A-12NLFGP1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35B	eh	AP6233A-12NLFPP1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
35B	ej	XC6104A642MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35-B	-	UTC8135-B	Vdet-IC	3.5V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
35C	-	AAT60035C-S5	Vdet-IC	3.5V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
35C	-	AP6233A-12NHNGP	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35C	-	AP6233A-12NHNPP	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
35C	eb	AP6233A-12NHNGA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35C	eb	AP6233A-12NHNPA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
35C	ec	AP6233A-12NHNGA1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35C	ec	AP6233A-12NHNPA1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
35C	eh	AP6233A-12NHNGP1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35C	eh	AP6233A-12NHNPP1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
35C	ej	XC6104A643MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35D	-	AAT60035D-S5	Vdet-IC	3.5V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
35D	-	AP6233A-12NLNGP	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35D	-	AP6233A-12NLNPP	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
35D	eb	AP6233A-12NLNGA	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35D	eb	AP6233A-12NLNPA	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
35D	ec	AP6233A-12NLNGA1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35D	ec	AP6233A-12NLNPA1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
35D	eh	AP6233A-12NLNGP1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35D	eh	AP6233A-12NLNPP1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
35D	ej	XC6104A644MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35E	-	AP6233A-12UHFGP	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35E	-	AP6233A-12UHFPP	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
35E	eb	AP6233A-12UHFGA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35E	eb	AP6233A-12UHFPA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
35E	ec	AP6233A-12UHFGA1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35E	ec	AP6233A-12UHFPA1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
35E	eh	AP6233A-12UHFGP1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35E	eh	AP6233A-12UHFPP1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
35E	ej	XC6104A645MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35F	-	AP6233A-12ULFGP	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35F	-	AP6233A-12ULFPP	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
35F	eb	AP6233A-12ULFGA	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35F	eb	AP6233A-12ULFPA	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
35F	ec	AP6233A-12ULFGA1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35F	ec	AP6233A-12ULFPA1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
35F	ec	XC6104A616MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
35F	eh	AP6233A-12ULFGP1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35F	eh	AP6233A-12ULFPP1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
35F	ej	XC6104A646MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35G	-	AP6233A-12UHNGP	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35G	-	AP6233A-12UHNPP	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
35G	eb	AP6233A-12UHNGA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35G	eb	AP6233A-12UHNPA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
35G	ec	AP6233A-12UHNGA1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35G	ec	AP6233A-12UHNPA1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
35G	eh	AP6233A-12UHNGP1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35G	eh	AP6233A-12UHNPP1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
35H	-	AP6233A-12ULNGP	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35H	-	AP6233A-12ULNPP	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
35H	eb	AP6233A-12ULNGA	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35H	eb	AP6233A-12ULNPA	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
35H	ec	AP6233A-12ULNGA1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35H	ec	AP6233A-12ULNPA1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
35H	ec	XC6104A617MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35H	eh	AP6233A-12ULNGP1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35H	eh	AP6233A-12ULNPP1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
35H	ej	XC6104A647MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35J	-	AP6233A-12DHFGP	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35J	-	AP6233A-12DHFPP	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
35J	eb	AP6233A-12DHFGA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35J	eb	AP6233A-12DHFPA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
35J	ec	AP6233A-12DHFGA1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35J	ec	AP6233A-12DHFPA1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
35J	eh	AP6233A-12DHFGP1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35J	eh	AP6233A-12DHFPP1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
35K	-	AP6233A-12DLFGP	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35K	-	AP6233A-12DLFPP	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
35K	-	TK71735S	LVR-IC	LDO, 3.5V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
35K	eb	AP6233A-12DLFGA	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35K	eb	AP6233A-12DLFPA	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
35K	ec	AP6233A-12DLFGA1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35K	ec	AP6233A-12DLFPA1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
35K	ec	XC6104A618MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35K	eh	AP6233A-12DLFGP1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35K	eh	AP6233A-12DLFPP1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
35K	ej	XC6104A648MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35L	-	AP6233A-12DHNGP	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35L	-	AP6233A-12DHNPP	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
35L	-	TK71635ASCL	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
35L	eb	AP6233A-12DHNGA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35L	eb	AP6233A-12DHNPA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
35L	ec	AP6233A-12DHNGA1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35L	ec	AP6233A-12DHNPA1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
35L	ec	XC6104A619MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35L	eh	AP6233A-12DHNGP1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35L	eh	AP6233A-12DHNPP1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
35L	ej	XC6104A649MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35M	-	AP6233A-12DLNGP	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35M	-	AP6233A-12DLNPP	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
35M	eb	AP6233A-12DLNGA	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35M	eb	AP6233A-12DLNPA	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
35M	ec	AP6233A-12DLNGA1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
35M	ec	AP6233A-12DLNPA1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
35M	ec	XC6104A620MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35M	eh	AP6233A-12DLNGP1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
35M	eh	AP6233A-12DLNPP1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
35M	ej	XC6104A650MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35N	ec	XC6104A621MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35P	ec	XC6104A622MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35R	ec	XC6104A623MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35S	ec	XC6104A624MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35T	-	TK71435S	LVR-IC	LDO, 3.5V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
35T	ec	XC6104A625MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35U	ec	XC6104A626MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35V	ec	XC6104A627MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35X	ec	XC6104A628MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
35Y	ec	XC6104A629MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
35Z	ec	XC6104A630MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
36	-	R1223N152G	DC-DC-IC	PWM step-down, +CE, 1.5V±2%, 300kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
36	-	RN5RF36AA	LVR-IC	LRip, -CE, 3.6V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
36	-	RN5RZ36AA	LVR-IC	LDO, LN, 3.6V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
36	-	XC62EP3602MR-G	LVR-IC	LDO, boosted, 3.6V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
36	ea	XC62ER3602MR-G	LVR-IC	LDO, boosted, 3.6V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
36-	-	XC62HR3602MR-G	LVR-IC	LDO, 3.6V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
360	ej	XC6104B231MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
360AC	-	BL8509-360ACRN	Vdet-IC	3.6V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
360AC	-	LC9009CB5TR360AC	Vdet-IC	3.6V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
360AN	-	BL8509-360ANRN	Vdet-IC	3.6V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
360AN	-	LC9009CB5TR360AN	Vdet-IC	3.6V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
360BC	-	BL8509-360BCRN	Vdet-IC	3.6V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
360BC	-	LC9009CB5TR360BC	Vdet-IC	3.6V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
360BN	-	BL8509-360BNRN	Vdet-IC	3.6V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
360BN	-	LC9009CB5TR360BN	Vdet-IC	3.6V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
360CC	-	BL8509-360CCRN	Vdet-IC	3.6V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
360CC	-	LC9009CB5TR360CC	Vdet-IC	3.6V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
360CN	-	BL8509-360CNRN	Vdet-IC	3.6V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
360CN	-	LC9009CB5TR360CN	Vdet-IC	3.6V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
360DC	-	BL8509-360DCRN	Vdet-IC	3.6V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
360DC	-	LC9009CB5TR360DC	Vdet-IC	3.6V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
360DN	-	BL8509-360DNRN	Vdet-IC	3.6V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
360DN	-	LC9009CB5TR360DN	Vdet-IC	3.6V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
360EC	-	BL8509-360ECRN	Vdet-IC	3.6V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
360EC	-	LC9009CB5TR360EC	Vdet-IC	3.6V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
360EN	-	BL8509-360ENRN	Vdet-IC	3.6V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
360EN	-	LC9009CB5TR360EN	Vdet-IC	3.6V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
360FC	-	BL8509-360FCRN	Vdet-IC	3.6V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
360FC	-	LC9009CB5TR360FC	Vdet-IC	3.6V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
360FN	-	BL8509-360FNRN	Vdet-IC	3.6V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
360FN	-	LC9009CB5TR360FN	Vdet-IC	3.6V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
360GC	-	BL8509-360GCRN	Vdet-IC	3.6V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
360GC	-	LC9009CB5TR360GC	Vdet-IC	3.6V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
360GN	-	BL8509-360GNRN	Vdet-IC	3.6V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
360GN	-	LC9009CB5TR360GN	Vdet-IC	3.6V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
361	ej	XC6104B232MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
362	ej	XC6104B233MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
363	ej	XC6104B234MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
364	ej	XC6104B235MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
365	ej	XC6104B236MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
366	ej	XC6104B237MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
367	ej	XC6104B238MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
368	ej	XC6104B239MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
369	ej	XC6104B240MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36A	-	AAT60036A-S5	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
36A	ej	XC6104B241MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36-A	-	UTC8136-A	Vdet-IC	3.6V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
36B	-	AAT60036B-S5	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
36B	ej	XC6104B242MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36-B	-	UTC8136-B	Vdet-IC	3.6V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
36C	-	AAT60036C-S5	Vdet-IC	3.6V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
36C	ej	XC6104B243MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36D	-	AAT60036D-S5	Vdet-IC	3.6V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
36D	ej	XC6104B244MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36E	ej	XC6104B245MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36F	ec	XC6104B216MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36F	ej	XC6104B246MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36H	ec	XC6104B217MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36H	ej	XC6104B247MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36K	-	TK71736S	LVR-IC	LDO, 3.6V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
36K	ec	XC6104B218MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36K	ej	XC6104B248MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36L	-	TK71636ASCL	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
36L	ec	XC6104B219MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36L	ej	XC6104B249MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36M	ec	XC6104B220MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36M	ej	XC6104B250MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36N	ec	XC6104B221MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
36P	ec	XC6104B222MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36R	ec	XC6104B223MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36S	ec	XC6104B224MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36T	-	TK71436S	LVR-IC	LDO, 3.6V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
36T	ec	XC6104B225MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36U	-	TK61036S	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Tok
36U	ec	XC6104B226MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36V	ec	XC6104B227MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36X	ec	XC6104B228MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36Y	ec	XC6104B229MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
36Z	ec	XC6104B230MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37	-	R1223N182G	DC-DC-IC	PWM step-down, +CE, 1.8V±2%, 300kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
37	-	RN5RF37AA	LVR-IC	LRip, -CE, 3.7V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
37	-	RN5RZ37AA	LVR-IC	LDO, LN, 3.7V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
37	-	XC62EP3702MR-G	LVR-IC	LDO, boosted, 3.7V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
37	ea	XC62ER3702MR-G	LVR-IC	LDO, boosted, 3.7V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
37-	-	XC62HR3702MR-G	LVR-IC	LDO, 3.7V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
370	ej	XC6104B331MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
370AC	-	BL8509-370ACRN	Vdet-IC	3.7V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
370AC	-	LC9009CB5TR370AC	Vdet-IC	3.7V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
370AN	-	BL8509-370ANRN	Vdet-IC	3.7V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
370AN	-	LC9009CB5TR370AN	Vdet-IC	3.7V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
370BC	-	BL8509-370BCRN	Vdet-IC	3.7V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
370BC	-	LC9009CB5TR370BC	Vdet-IC	3.7V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
370BN	-	BL8509-370BNRN	Vdet-IC	3.7V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
370BN	-	LC9009CB5TR370BN	Vdet-IC	3.7V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
370CC	-	BL8509-370CCRN	Vdet-IC	3.7V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
370CC	-	LC9009CB5TR370CC	Vdet-IC	3.7V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
370CN	-	BL8509-370CNRN	Vdet-IC	3.7V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
370CN	-	LC9009CB5TR370CN	Vdet-IC	3.7V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
370DC	-	BL8509-370DCRN	Vdet-IC	3.7V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
370DC	-	LC9009CB5TR370DC	Vdet-IC	3.7V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
370DN	-	BL8509-370DNRN	Vdet-IC	3.7V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
370DN	-	LC9009CB5TR370DN	Vdet-IC	3.7V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
370EC	-	BL8509-370ECRN	Vdet-IC	3.7V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
370EC	-	LC9009CB5TR370EC	Vdet-IC	3.7V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
370EN	-	BL8509-370ENRN	Vdet-IC	3.7V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
370EN	-	LC9009CB5TR370EN	Vdet-IC	3.7V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
370FC	-	BL8509-370FCRN	Vdet-IC	3.7V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
370FC	-	LC9009CB5TR370FC	Vdet-IC	3.7V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
370FN	-	BL8509-370FNRN	Vdet-IC	3.7V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
370FN	-	LC9009CB5TR370FN	Vdet-IC	3.7V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
370GC	-	BL8509-370GCRN	Vdet-IC	3.7V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
370GC	-	LC9009CB5TR370GC	Vdet-IC	3.7V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
370GN	-	BL8509-370GNRN	Vdet-IC	3.7V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
370GN	-	LC9009CB5TR370GN	Vdet-IC	3.7V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
371	ej	XC6104B332MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
372	ej	XC6104B333MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
373	ej	XC6104B334MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
374	ej	XC6104B335MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
375	ej	XC6104B336MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
376	ej	XC6104B337MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
377	ej	XC6104B338MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
378	ej	XC6104B339MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
379	ej	XC6104B340MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37A	-	AAT60037A-S5	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
37A	ej	XC6104B341MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37-A	-	UTC8137-A	Vdet-IC	3.7V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
37B	-	AAT60037B-S5	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
37B	ej	XC6104B342MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37-B	-	UTC8137-B	Vdet-IC	3.7V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
37C	-	AAT60037C-S5	Vdet-IC	3.7V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
37C	ej	XC6104B343MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37D	-	AAT60037D-S5	Vdet-IC	3.7V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
37D	ej	XC6104B344MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37E	ej	XC6104B345MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37F	ec	XC6104B316MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37F	ej	XC6104B346MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37H	ec	XC6104B317MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37H	ej	XC6104B347MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
37K	-	TK71737S	LVR-IC	LDO, 3.7V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
37K	ec	XC6104B318MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37K	ej	XC6104B348MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37L	-	TK71637ASCL	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
37L	ec	XC6104B319MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37L	ej	XC6104B349MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37M	ec	XC6104B320MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37M	ej	XC6104B350MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37N	ec	XC6104B321MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37P	ec	XC6104B322MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37R	ec	XC6104B323MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37S	ec	XC6104B324MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37T	-	TK71437S	LVR-IC	LDO, 3.7V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
37T	ec	XC6104B325MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37U	ec	XC6104B326MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37V	ec	XC6104B327MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37X	ec	XC6104B328MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37Y	ec	XC6104B329MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
37Z	ec	XC6104B330MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38	-	R1223N252G	DC-DC-IC	PWM step-down, +CE, 2.5V±2%, 300kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
38	-	RN5RF38AA	LVR-IC	LRip, -CE, 3.8V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
38	-	RN5RZ38AA	LVR-IC	LDO, LN, 3.8V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
38	-	XC62EP3802MR-G	LVR-IC	LDO, boosted, 3.8V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
38	ea	XC62ER3802MR-G	LVR-IC	LDO, boosted, 3.8V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
38-	-	XC62HR3802MR-G	LVR-IC	LDO, 3.8V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
380	eb	XC6403AA80M	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
380	ej	XC6104B431MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
380AC	-	BL8509-380ACRN	Vdet-IC	3.8V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
380AC	-	LC9009CB5TR380AC	Vdet-IC	3.8V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
380AN	-	BL8509-380ANRN	Vdet-IC	3.8V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
380AN	-	LC9009CB5TR380AN	Vdet-IC	3.8V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
380BC	-	BL8509-380BCRN	Vdet-IC	3.8V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
380BC	-	LC9009CB5TR380BC	Vdet-IC	3.8V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
380BN	-	BL8509-380BNRN	Vdet-IC	3.8V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
380BN	-	LC9009CB5TR380BN	Vdet-IC	3.8V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
380CC	-	BL8509-380CCRN	Vdet-IC	3.8V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
380CC	-	LC9009CB5TR380CC	Vdet-IC	3.8V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
380CN	-	BL8509-380CNRN	Vdet-IC	3.8V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
380CN	-	LC9009CB5TR380CN	Vdet-IC	3.8V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
380DC	-	BL8509-380DCRN	Vdet-IC	3.8V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
380DC	-	LC9009CB5TR380DC	Vdet-IC	3.8V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
380DN	-	BL8509-380DNRN	Vdet-IC	3.8V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
380DN	-	LC9009CB5TR380DN	Vdet-IC	3.8V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
380EC	-	BL8509-380ECRN	Vdet-IC	3.8V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
380EC	-	LC9009CB5TR380EC	Vdet-IC	3.8V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
380EN	-	BL8509-380ENRN	Vdet-IC	3.8V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
380EN	-	LC9009CB5TR380EN	Vdet-IC	3.8V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
380FC	-	BL8509-380FCRN	Vdet-IC	3.8V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
380FC	-	LC9009CB5TR380FC	Vdet-IC	3.8V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
380FN	-	BL8509-380FNRN	Vdet-IC	3.8V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
380FN	-	LC9009CB5TR380FN	Vdet-IC	3.8V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
380GC	-	BL8509-380GCRN	Vdet-IC	3.8V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
380GC	-	LC9009CB5TR380GC	Vdet-IC	3.8V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
380GN	-	BL8509-380GNRN	Vdet-IC	3.8V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
380GN	-	LC9009CB5TR380GN	Vdet-IC	3.8V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
381	eb	XC6403AA81M	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
381	ej	XC6104B432MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
382	eb	XC6403AA82M	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
382	ej	XC6104B433MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
383	eb	XC6403AA83M	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
383	ej	XC6104B434MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
384	eb	XC6403AA84M	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
384	ej	XC6104B435MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
385	eb	XC6403AA85M	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
385	ej	XC6104B436MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
386	eb	XC6403AA86M	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
386	ej	XC6104B437MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
387	eb	XC6403AA87M	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor
387	ej	XC6104B438MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
388	eb	XC6403AA88M	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, +CE, PDR	SOT-25	28hq	VR15	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
388	ej	XC6104B439MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
389	ej	XC6104B440MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38A	-	AAT60038A-S5	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
38A	-	AP6233A-15NHFGP	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38A	-	AP6233A-15NHFPP	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
38A	eb	AP6233A-15NHFGA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38A	eb	AP6233A-15NHFPA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
38A	ec	AP6233A-15NHFGA1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38A	ec	AP6233A-15NHFPA1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
38A	eh	AP6233A-15NHFGP1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38A	eh	AP6233A-15NHFPP1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
38A	ej	XC6104B441MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38-A	-	UTC8138-A	Vdet-IC	3.8V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
38B	-	AAT60038B-S5	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
38B	-	AP6233A-15NLFGP	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38B	-	AP6233A-15NLFPP	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
38B	eb	AP6233A-15NLFGA	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38B	eb	AP6233A-15NLFPA	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
38B	ec	AP6233A-15NLFGA1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38B	ec	AP6233A-15NLFPA1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
38B	eh	AP6233A-15NLFGP1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38B	eh	AP6233A-15NLFPP1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
38B	ej	XC6104B442MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38-B	-	UTC8138-B	Vdet-IC	3.8V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
38C	-	AAT60038C-S5	Vdet-IC	3.8V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
38C	-	AP6233A-15NHNGP	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38C	-	AP6233A-15NHNPP	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
38C	eb	AP6233A-15NHNGA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38C	eb	AP6233A-15NHNPA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
38C	ec	AP6233A-15NHNGA1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38C	ec	AP6233A-15NHNPA1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
38C	eh	AP6233A-15NHNGP1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38C	eh	AP6233A-15NHNPP1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
38C	ej	XC6104B443MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38D	-	AAT60038D-S5	Vdet-IC	3.8V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
38D	-	AP6233A-15NLNGP	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38D	-	AP6233A-15NLNPP	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
38D	eb	AP6233A-15NLNGA	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38D	eb	AP6233A-15NLNPA	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
38D	ec	AP6233A-15NLNGA1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38D	ec	AP6233A-15NLNPA1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
38D	eh	AP6233A-15NLNGP1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38D	eh	AP6233A-15NLNPP1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
38D	ej	XC6104B444MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38E	-	AP6233A-15UHFGP	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38E	-	AP6233A-15UHFPP	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
38E	eb	AP6233A-15UHFGA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38E	eb	AP6233A-15UHFPA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
38E	ec	AP6233A-15UHFGA1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38E	ec	AP6233A-15UHFPA1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
38E	eh	AP6233A-15UHFGP1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38E	eh	AP6233A-15UHFPP1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
38E	ej	XC6104B445MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38F	-	AP6233A-15ULFGP	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38F	-	AP6233A-15ULFPP	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
38F	eb	AP6233A-15ULFGA	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38F	eb	AP6233A-15ULFPA	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
38F	ec	AP6233A-15ULFGA1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38F	ec	AP6233A-15ULFPA1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
38F	ec	XC6104B416MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38F	eh	AP6233A-15ULFGP1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38F	eh	AP6233A-15ULFPP1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
38F	ej	XC6104B446MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38G	-	AP6233A-15UHNGP	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38G	-	AP6233A-15UHNPP	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
38G	eb	AP6233A-15UHNGA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38G	eb	AP6233A-15UHNPA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
38G	ec	AP6233A-15UHNGA1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38G	ec	AP6233A-15UHNPA1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
38G	eh	AP6233A-15UHNGP1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
38G	eh	AP6233A-15UHNPP1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
38H	-	AP6233A-15ULNGP	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38H	-	AP6233A-15ULNPP	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
38H	eb	AP6233A-15ULNGA	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38H	eb	AP6233A-15ULNPA	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
38H	ec	AP6233A-15ULNGA1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38H	ec	AP6233A-15ULNPA1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
38H	ec	XC6104B417MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38H	eh	AP6233A-15ULNGP1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38H	eh	AP6233A-15ULNPP1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
38H	ej	XC6104B447MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38J	-	AP6233A-15DHFGP	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38J	-	AP6233A-15DHFPP	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
38J	eb	AP6233A-15DHFGA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38J	eb	AP6233A-15DHFPA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
38J	ec	AP6233A-15DHFGA1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38J	ec	AP6233A-15DHFPA1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
38J	eh	AP6233A-15DHFGP1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38J	eh	AP6233A-15DHFPP1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
38K	-	AP6233A-15DLFGP	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38K	-	AP6233A-15DLFPP	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
38K	-	TK71738S	LVR-IC	LDO, 3.8V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
38K	eb	AP6233A-15DLFGA	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38K	eb	AP6233A-15DLFPA	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
38K	ec	AP6233A-15DLFGA1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38K	ec	AP6233A-15DLFPA1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
38K	ec	XC6104B418MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38K	eh	AP6233A-15DLFGP1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38K	eh	AP6233A-15DLFPP1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
38K	ej	XC6104B448MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38L	-	AP6233A-15DHNGP	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38L	-	AP6233A-15DHNPP	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
38L	-	TK71638ASCL	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
38L	eb	AP6233A-15DHNGA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38L	eb	AP6233A-15DHNPA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
38L	ec	AP6233A-15DHNGA1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38L	ec	AP6233A-15DHNPA1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
38L	ec	XC6104B419MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38L	eh	AP6233A-15DHNGP1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38L	eh	AP6233A-15DHNPP1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
38L	ej	XC6104B449MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38M	-	AP6233A-15DLNGP	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38M	-	AP6233A-15DLNPP	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
38M	eb	AP6233A-15DLNGA	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38M	eb	AP6233A-15DLNPA	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
38M	ec	AP6233A-15DLNGA1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
38M	ec	AP6233A-15DLNPA1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
38M	ec	XC6104B420MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38M	eh	AP6233A-15DLNGP1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
38M	eh	AP6233A-15DLNPP1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
38M	ej	XC6104B450MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38N	ec	XC6104B421MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38P	ec	XC6104B422MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38R	ec	XC6104B423MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38S	ec	XC6104B424MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38T	-	TK71438S	LVR-IC	LDO, 3.8V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
38T	ec	XC6104B425MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38U	ec	XC6104B426MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38V	ec	XC6104B427MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38X	ec	XC6104B428MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38Y	ec	XC6104B429MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
38Z	ec	XC6104B430MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39	-	R1223N302G	DC-DC-IC	PWM step-down, +CE, 3V±2%, 300kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
39	-	RN5RF39AA	LVR-IC	LRip, -CE, 3.9V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
39	-	RN5RZ39AA	LVR-IC	LDO, LN, 3.9V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
39	-	XC62EP3902MR-G	LVR-IC	LDO, boosted, 3.9V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
39	ea	XC62ER3902MR-G	LVR-IC	LDO, boosted, 3.9V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
39-	-	XC62HR3902MR-G	LVR-IC	LDO, 3.9V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
390	ej	XC6104B531MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
390AC	-	BL8509-390ACRN	Vdet-IC	3.9V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
390AC	-	LC9009CB5TR390AC	Vdet-IC	3.9V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
390AN	-	BL8509-390ANRN	Vdet-IC	3.9V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
390AN	-	LC9009CB5TR390AN	Vdet-IC	3.9V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
390BC	-	BL8509-390BCRN	Vdet-IC	3.9V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
390BC	-	LC9009CB5TR390BC	Vdet-IC	3.9V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
390BN	-	BL8509-390BNRN	Vdet-IC	3.9V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
390BN	-	LC9009CB5TR390BN	Vdet-IC	3.9V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
390CC	-	BL8509-390CCRN	Vdet-IC	3.9V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
390CC	-	LC9009CB5TR390CC	Vdet-IC	3.9V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
390CN	-	BL8509-390CNRN	Vdet-IC	3.9V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
390CN	-	LC9009CB5TR390CN	Vdet-IC	3.9V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
390DC	-	BL8509-390DCRN	Vdet-IC	3.9V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
390DC	-	LC9009CB5TR390DC	Vdet-IC	3.9V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
390DN	-	BL8509-390DNRN	Vdet-IC	3.9V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
390DN	-	LC9009CB5TR390DN	Vdet-IC	3.9V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
390EC	-	BL8509-390ECRN	Vdet-IC	3.9V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
390EC	-	LC9009CB5TR390EC	Vdet-IC	3.9V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
390EN	-	BL8509-390ENRN	Vdet-IC	3.9V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
390EN	-	LC9009CB5TR390EN	Vdet-IC	3.9V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
390FC	-	BL8509-390FCRN	Vdet-IC	3.9V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
390FC	-	LC9009CB5TR390FC	Vdet-IC	3.9V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
390FN	-	BL8509-390FNRN	Vdet-IC	3.9V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
390FN	-	LC9009CB5TR390FN	Vdet-IC	3.9V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
390GC	-	BL8509-390GCRN	Vdet-IC	3.9V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
390GC	-	LC9009CB5TR390GC	Vdet-IC	3.9V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
390GN	-	BL8509-390GNRN	Vdet-IC	3.9V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
390GN	-	LC9009CB5TR390GN	Vdet-IC	3.9V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
391	ej	XC6104B532MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
392	ej	XC6104B533MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
393	ej	XC6104B534MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
394	ej	XC6104B535MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
395	ej	XC6104B536MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
396	ej	XC6104B537MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
397	ej	XC6104B538MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
398	ej	XC6104B539MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
399	ej	XC6104B540MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39A	-	AAT60039A-S5	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
39A	ej	XC6104B541MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39-A	-	UTC8139-A	Vdet-IC	3.9V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
39B	-	AAT60039B-S5	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
39B	ej	XC6104B542MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39-B	-	UTC8139-B	Vdet-IC	3.9V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
39C	-	AAT60039C-S5	Vdet-IC	3.9V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
39C	ej	XC6104B543MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39D	-	AAT60039D-S5	Vdet-IC	3.9V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
39D	ej	XC6104B544MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39E	ej	XC6104B545MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39F	ec	XC6104B516MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39F	ej	XC6104B546MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39H	ec	XC6104B517MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39H	ej	XC6104B547MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39K	-	TK71739S	LVR-IC	LDO, 3.9V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
39K	ec	XC6104B518MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39K	ej	XC6104B548MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39L	-	TK71639ASCL	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
39L	ec	XC6104B519MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39L	ej	XC6104B549MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39M	ec	XC6104B520MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39M	ej	XC6104B550MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39N	ec	XC6104B521MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39P	ec	XC6104B522MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39R	ec	XC6104B523MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39S	ec	XC6104B524MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39T	-	TK71439S	LVR-IC	LDO, 3.9V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
39T	ec	XC6104B525MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39U	ec	XC6104B526MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39V	ec	XC6104B527MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39X	ec	XC6104B528MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39Y	ec	XC6104B529MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
39Z	ec	XC6104B530MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3A	-	LM431N5	Vref-IC	Adjust, Precision, Shunt, 2.44..2.55V±2.2%	SOT-23-5	28re	RF2	6a	Ttr
3A0	-	XC6221A311MR	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3A0	ej	XC6104B631MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3A1	-	XC6221A321MR	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3A1	ej	XC6104B632MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3A2	-	XC6221A331MR	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3A2	ej	XC6104B633MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3A3	-	XC6221A341MR	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3A3	ej	XC6104B634MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3A4	-	U74LVC1G14-AF5	CMOS-Log	Inverting Schmitt-trigger	SOT-23-5	28	Log7	6a	Utc
3A4	-	U74LVC1G14-AL5	CMOS-Log	Inverting Schmitt-trigger	SOT-353	28	Log7	6a	Utc
3A4	-	XC6221A351MR	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3A4	ej	XC6104B635MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3A4L	-	U74LVC1G14L-AF5	CMOS-Log	Inverting Schmitt-trigger	SOT-23-5	28	Log7	6a	Utc
3A4L	-	U74LVC1G14L-AL5	CMOS-Log	Inverting Schmitt-trigger	SOT-353	28	Log7	6a	Utc
3A5	-	XC6221A361MR	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3A5	eb	AP6203A-12GA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3A5	eb	AP6203A-12PA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-25	28cx	VR4	6k	Anw
3A5	ej	XC6104B636MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3A6	-	XC6221A371MR	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3A6	ej	XC6104B637MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3A7	-	U74LVC1G17-AF5	CMOS-Log	Schmitt-trigger	SOT-23-5	28	Log11	6a	Utc
3A7	-	U74LVC1G17-AL5	CMOS-Log	Schmitt-trigger	SOT-353	28	Log11	6a	Utc
3A7	-	XC6221A381MR	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3A7	ej	XC6104B638MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3A7G	-	U74LVC1G17G-AF5	CMOS-Log	Schmitt-trigger	SOT-23-5	28	Log11	6a	Utc
3A7G	-	U74LVC1G17G-AL5	CMOS-Log	Schmitt-trigger	SOT-353	28	Log11	6a	Utc
3A7L	-	U74LVC1G17L-AF5	CMOS-Log	Schmitt-trigger	SOT-23-5	28	Log11	6a	Utc
3A7L	-	U74LVC1G17L-AL5	CMOS-Log	Schmitt-trigger	SOT-353	28	Log11	6a	Utc
3A8	-	XC6221A391MR	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3A8	-	XC6227A081MR	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3A8	eb	AP6203A-15GA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3A8	eb	AP6203A-15PA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-25	28cx	VR4	6k	Anw
3A8	ej	XC6104B639MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3A9	-	XC6221A401MR	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3A9	-	XC6227A091MR	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3A9	ej	XC6104B640MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AA	-	AP6233A-18NHFGP	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AA	-	AP6233A-18NHFPP	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3AA	-	XC6221A411MR	LVR-IC	LDO, 4.1±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3AA	-	XC6227A101MR	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AA	eb	AP6203A-18GA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AA	eb	AP6203A-18PA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-25	28cx	VR4	6k	Anw
3AA	eb	AP6233A-18NHFGA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AA	eb	AP6233A-18NHFPA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3AA	ec	AP6233A-18NHFGA1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AA	ec	AP6233A-18NHFPA1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3AA	eh	AP6233A-18NHFGP1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AA	eh	AP6233A-18NHFPP1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3AA	ej	XC6104B641MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AB	-	AP6233A-18NLFGP	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AB	-	AP6233A-18NLFPP	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3AB	-	XC6221A421MR	LVR-IC	LDO, 4.2±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3AB	-	XC6227A111MR	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AB	eb	AP6233A-18NLFGA	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AB	eb	AP6233A-18NLFPA	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3AB	ec	AP6233A-18NLFGA1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AB	ec	AP6233A-18NLFPA1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3AB	eh	AP6233A-18NLFGP1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AB	eh	AP6233A-18NLFPP1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3AB	ej	XC6104B642MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AC	-	AP6233A-18NHNGP	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AC	-	AP6233A-18NHNPP	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
3AC	-	XC6221A431MR	LVR-IC	LDO, 4.3±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3AC	-	XC6227A121MR	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AC	eb	AP6233A-18NHNGA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AC	eb	AP6233A-18NHNPA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
3AC	ec	AP6233A-18NHNGA1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AC	ec	AP6233A-18NHNPA1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
3AC	eh	AP6233A-18NHNGP1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3AC	eh	AP6233A-18NHNPP1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
3AC	ej	XC6104B643MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AD	-	AP6233A-18NLNGP	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AD	-	AP6233A-18NLNPP	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
3AD	-	XC6221A441MR	LVR-IC	LDO, 4.4±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3AD	-	XC6227A131MR	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AD	eb	AP6233A-18NLNGA	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AD	eb	AP6233A-18NLNPA	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
3AD	ec	AP6233A-18NLNGA1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AD	ec	AP6233A-18NLNPA1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
3AD	eh	AP6233A-18NLNGP1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AD	eh	AP6233A-18NLNPP1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
3AD	ej	XC6104B644MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AE	-	AP6233A-18UHFGP	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AE	-	AP6233A-18UHFPP	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3AE	-	XC6221A451MR	LVR-IC	LDO, 4.5±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3AE	-	XC6227A141MR	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AE	eb	AP6233A-18UHFGA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AE	eb	AP6233A-18UHFPA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3AE	ec	AP6233A-18UHFGA1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AE	ec	AP6233A-18UHFPA1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3AE	eh	AP6233A-18UHFGP1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AE	eh	AP6233A-18UHFPP1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3AE	ej	XC6104B645MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AF	-	AP6233A-18ULFGP	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AF	-	AP6233A-18ULFPP	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3AF	-	XC6221A461MR	LVR-IC	LDO, 4.6±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3AF	-	XC6227A151MR	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AF	eb	AP6233A-18ULFGA	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AF	eb	AP6233A-18ULFPA	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3AF	ec	AP6233A-18ULFGA1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AF	ec	AP6233A-18ULFPA1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3AF	ec	XC6104B616MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AF	eh	AP6233A-18ULFGP1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AF	eh	AP6233A-18ULFPP1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3AF	ej	XC6104B646MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AG	-	AP6233A-18UHNGP	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AG	-	AP6233A-18UHNPP	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3AG	eb	AP6203A-25GA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AG	eb	AP6203A-25PA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-25	28cx	VR4	6k	Anw
3AG	eb	AP6233A-18UHNGA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AG	eb	AP6233A-18UHNPA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3AG	ec	AP6233A-18UHNGA1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AG	ec	AP6233A-18UHNPA1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3AG	eh	AP6233A-18UHNGP1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AG	eh	AP6233A-18UHNPP1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3AH	-	AP6233A-18ULNGP	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AH	-	AP6233A-18ULNPP	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3AH	-	XC6221A471MR	LVR-IC	LDO, 4.7±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3AH	-	XC6227A161MR	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AH	eb	AP6233A-18ULNGA	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AH	eb	AP6233A-18ULNPA	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3AH	ec	AP6233A-18ULNGA1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AH	ec	AP6233A-18ULNPA1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3AH	ec	XC6104B617MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AH	eh	AP6233A-18ULNGP1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AH	eh	AP6233A-18ULNPP1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3AH	ej	XC6104B647MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AJ	-	AP6233A-18DHFGP	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AJ	-	AP6233A-18DHFPP	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3AJ	eb	AP6203A-27GA	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AJ	eb	AP6203A-27PA	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-25	28cx	VR4	6k	Anw
3AJ	eb	AP6233A-18DHFGA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AJ	eb	AP6233A-18DHFPA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3AJ	ec	AP6233A-18DHFGA1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AJ	ec	AP6233A-18DHFPA1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3AJ	eh	AP6233A-18DHFGP1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AJ	eh	AP6233A-18DHFPP1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3AK	-	AP6233A-18DLFGP	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AK	-	AP6233A-18DLFPP	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3AK	-	XC6221A481MR	LVR-IC	LDO, 4.8±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3AK	-	XC6227A171MR	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AK	eb	AP6203A-28GA	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AK	eb	AP6203A-28PA	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-25	28cx	VR4	6k	Anw
3AK	eb	AP6233A-18DLFGA	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AK	eb	AP6233A-18DLFPA	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3AK	ec	AP6233A-18DLFGA1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AK	ec	AP6233A-18DLFPA1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3AK	ec	XC6104B618MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AK	eh	AP6233A-18DLFGP1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AK	eh	AP6233A-18DLFPP1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3AK	ej	XC6104B648MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AL	-	AP6233A-18DHNGP	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AL	-	AP6233A-18DHNPP	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3AL	-	XC6221A491MR	LVR-IC	LDO, 4.9±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3AL	-	XC6227A181MR	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AL	eb	AP6203A-LLGA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AL	eb	AP6203A-LLPA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-25	28cx	VR4	6k	Anw
3AL	eb	AP6233A-18DHNGA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AL	eb	AP6233A-18DHNPA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3AL	ec	AP6233A-18DHNGA1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AL	ec	AP6233A-18DHNPA1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3AL	ec	XC6104B619MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AL	eh	AP6233A-18DHNGP1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AL	eh	AP6233A-18DHNPP1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3AL	ej	XC6104B649MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AM	-	AP6233A-18DLNGP	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AM	-	AP6233A-18DLNPP	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3AM	-	XC6221A501MR	LVR-IC	LDO, 5.0±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3AM	-	XC6227A191MR	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AM	eb	AP6203A-30GA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AM	eb	AP6203A-30PA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6k	Anw
3AM	eb	AP6233A-18DLNGA	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AM	eb	AP6233A-18DLNPA	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3AM	ec	AP6233A-18DLNGA1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AM	ec	AP6233A-18DLNPA1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3AM	ec	XC6104B620MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AM	eh	AP6233A-18DLNGP1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3AM	eh	AP6233A-18DLNPP1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3AM	ej	XC6104B650MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AN	-	XC6227A201MR	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AN	ec	XC6104B621MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AP	-	XC6227A211MR	LVR-IC	LDO, 2.1V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AP	ec	XC6104B622MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AQ	eb	AP6203A-33GA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AQ	eb	AP6203A-33PA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-25	28cx	VR4	6k	Anw
3AR	-	XC6227A221MR	LVR-IC	LDO, 2.2V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AR	ec	XC6104B623MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AS	-	XC6227A231MR	LVR-IC	LDO, 2.3V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AS	eb	AP6203A-42GA	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AS	eb	AP6203A-42PA	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-25	28cx	VR4	6k	Anw
3AS	ec	XC6104B624MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AT	-	XC6227A241MR	LVR-IC	LDO, 2.4V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AT	ec	XC6104B625MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AU	-	XC6227A251MR	LVR-IC	LDO, 2.5V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AU	ec	XC6104B626MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AV	-	XC6227A261MR	LVR-IC	LDO, 2.6V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AV	eb	AP6203A-36GA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3AV	eb	AP6203A-36PA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-25	28cx	VR4	6k	Anw
3AV	ec	XC6104B627MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AX	-	XC6227A271MR	LVR-IC	LDO, 2.7V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AX	ec	XC6104B628MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AY	-	XC6227A281MR	LVR-IC	LDO, 2.8V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AY	ec	XC6104B629MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3AZ	-	XC6227A291MR	LVR-IC	LDO, 2.9V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3AZ	ec	XC6104B630MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
3B	-	R3111N131A	Vdet-IC	1.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
3B	-	RN5RL23AA	LVR-IC	2.3V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
3B	eu	RN5VD13CA	Vdet-IC	1.3V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
3B0	-	TAR5SB30	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3B0	ej	XC6104C231MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3B1	-	TAR5SB31	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
3B1	-	XC6221B321MR	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3B1	ej	XC6104C232MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3B2	-	TAR5SB32	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
3B2	-	XC6221B331MR	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3B2	ej	XC6104C233MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3B3	-	TAR5SB33	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
3B3	-	XC6221B341MR	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3B3	ej	XC6104C234MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3B4	-	TAR5SB34	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
3B4	-	XC6221B351MR	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3B4	ej	XC6104C235MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3B5	-	TAR5SB35	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
3B5	-	XC6221B361MR	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3B5	ej	XC6104C236MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3B6	-	TAR5SB36	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
3B6	-	XC6221B371MR	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3B6	ej	XC6104C237MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3B7	-	TAR5SB37	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
3B7	-	XC6221B381MR	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3B7	ej	XC6104C238MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3B8	-	TAR5SB38	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
3B8	-	XC6221B391MR	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3B8	-	XC6227A08BMR	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3B8	ej	XC6104C239MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3B9	-	TAR5SB39	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
3B9	-	XC6221B401MR	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3B9	-	XC6227A09BMR	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3B9	ej	XC6104C240MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BA	-	XC6221B411MR	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3BA	-	XC6227A10BMR	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BA	ej	XC6104C241MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BB	-	XC6221B421MR	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3BB	-	XC6227A11BMR	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BB	ej	XC6104C242MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BC	-	XC6221B431MR	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3BC	-	XC6227A12BMR	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BC	ej	XC6104C243MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BD	-	XC6221B441MR	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3BD	-	XC6227A13BMR	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BD	ej	XC6104C244MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BE	-	XC6221B451MR	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3BE	-	XC6227A14BMR	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BE	ej	XC6104C245MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BF	-	XC6221B461MR	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3BF	-	XC6227A15BMR	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BF	ec	XC6104C216MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BF	ej	XC6104C246MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BH	-	XC6221B471MR	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3BH	-	XC6227A16BMR	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BH	ec	XC6104C217MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BH	ej	XC6104C247MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BK	-	XC6221B481MR	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3BK	-	XC6227A17BMR	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BK	ec	XC6104C218MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BK	ej	XC6104C248MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BL	-	XC6221B491MR	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3BL	-	XC6227A18BMR	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BL	ec	XC6104C219MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BL	ej	XC6104C249MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BM	-	XC6221B501MR	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3BM	-	XC6227A19BMR	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BM	ec	XC6104C220MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BM	ej	XC6104C250MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BN	-	XC6227A20BMR	LVR-IC	LDO, 2.05V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BN	ec	XC6104C221MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BP	-	XC6227A21BMR	LVR-IC	LDO, 2.15V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BP	ec	XC6104C222MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BR	-	XC6227A22BMR	LVR-IC	LDO, 2.25V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3BR	ec	XC6104C223MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BS	-	XC6227A23BMR	LVR-IC	LDO, 2.35V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BS	ec	XC6104C224MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BT	-	XC6227A24BMR	LVR-IC	LDO, 2.45V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BT	ec	XC6104C225MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BU	-	XC6227A25BMR	LVR-IC	LDO, 2.55V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BU	ec	XC6104C226MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BV	-	XC6227A26BMR	LVR-IC	LDO, 2.65V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BV	ec	XC6104C227MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BX	-	XC6227A27BMR	LVR-IC	LDO, 2.75V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BX	ec	XC6104C228MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BY	-	XC6227A28BMR	LVR-IC	LDO, 2.85V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BY	ec	XC6104C229MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3BZ	-	XC6227A29BMR	LVR-IC	LDO, 2.95V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3BZ	ec	XC6104C230MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3C	-	R3111N231A	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
3C	-	RN5RL33AA	LVR-IC	3.3V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
3C	eu	RN5VD23CA	Vdet-IC	2.3V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
3C0	-	XC6227A301MR	LVR-IC	LDO, 3.0V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3C0	ej	XC6104C331MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3C1	-	XC6227A311MR	LVR-IC	LDO, 3.1V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3C1	ej	XC6104C332MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3C2	-	XC6227A321MR	LVR-IC	LDO, 3.2V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3C2	ej	XC6104C333MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3C25	-	LC3030CCB5TR25	DC-DC-IC	PFM, step-up, 2.5V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C26	-	LC3030CCB5TR26	DC-DC-IC	PFM, step-up, 2.6V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C27	-	LC3030CCB5TR27	DC-DC-IC	PFM, step-up, 2.7V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C28	-	LC3030CCB5TR28	DC-DC-IC	PFM, step-up, 2.8V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C29	-	LC3030CCB5TR29	DC-DC-IC	PFM, step-up, 2.9V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C3	-	XC6227A331MR	LVR-IC	LDO, 3.3V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3C3	ej	XC6104C334MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3C30	-	LC3030CCB5TR30	DC-DC-IC	PFM, step-up, 3.0V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C31	-	LC3030CCB5TR31	DC-DC-IC	PFM, step-up, 3.1V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C32	-	LC3030CCB5TR32	DC-DC-IC	PFM, step-up, 3.2V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C33	-	LC3030CCB5TR33	DC-DC-IC	PFM, step-up, 3.3V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C34	-	LC3030CCB5TR34	DC-DC-IC	PFM, step-up, 3.4V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C35	-	LC3030CCB5TR35	DC-DC-IC	PFM, step-up, 3.5V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C36	-	LC3030CCB5TR36	DC-DC-IC	PFM, step-up, 3.6V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C37	-	LC3030CCB5TR37	DC-DC-IC	PFM, step-up, 3.7V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C38	-	LC3030CCB5TR38	DC-DC-IC	PFM, step-up, 3.8V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C39	-	LC3030CCB5TR39	DC-DC-IC	PFM, step-up, 3.9V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C4	-	U74LVC1G34-AF5	CMOS-Log	Noninverting buffer	SOT-23-5	28	Log10	6a	Utc
3C4	-	U74LVC1G34-AL5	CMOS-Log	Noninverting buffer	SOT-353	28	Log10	6a	Utc
3C4	-	XC6227A341MR	LVR-IC	LDO, 3.4V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3C4	ej	XC6104C335MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3C40	-	LC3030CCB5TR40	DC-DC-IC	PFM, step-up, 4.0V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C41	-	LC3030CCB5TR41	DC-DC-IC	PFM, step-up, 4.1V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C42	-	LC3030CCB5TR42	DC-DC-IC	PFM, step-up, 4.2V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C43	-	LC3030CCB5TR43	DC-DC-IC	PFM, step-up, 4.3V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C44	-	LC3030CCB5TR44	DC-DC-IC	PFM, step-up, 4.4V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C45	-	LC3030CCB5TR45	DC-DC-IC	PFM, step-up, 4.5V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C46	-	LC3030CCB5TR46	DC-DC-IC	PFM, step-up, 4.6V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C47	-	LC3030CCB5TR47	DC-DC-IC	PFM, step-up, 4.7V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C48	-	LC3030CCB5TR48	DC-DC-IC	PFM, step-up, 4.8V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C49	-	LC3030CCB5TR49	DC-DC-IC	PFM, step-up, 4.9V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C4L	-	U74LVC1G34L-AF5	CMOS-Log	Noninverting buffer	SOT-23-5	28	Log10	6a	Utc
3C4L	-	U74LVC1G34L-AL5	CMOS-Log	Noninverting buffer	SOT-353	28	Log10	6a	Utc
3C5	-	XC6227A351MR	LVR-IC	LDO, 3.5V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3C5	ej	XC6104C336MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3C50	-	LC3030CCB5TR50	DC-DC-IC	PFM, step-up, 5.0V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C51	-	LC3030CCB5TR51	DC-DC-IC	PFM, step-up, 5.1V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C52	-	LC3030CCB5TR52	DC-DC-IC	PFM, step-up, 5.2V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C53	-	LC3030CCB5TR53	DC-DC-IC	PFM, step-up, 5.3V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C54	-	LC3030CCB5TR54	DC-DC-IC	PFM, step-up, 5.4V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C55	-	LC3030CCB5TR55	DC-DC-IC	PFM, step-up, 5.5V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C56	-	LC3030CCB5TR56	DC-DC-IC	PFM, step-up, 5.6V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C57	-	LC3030CCB5TR57	DC-DC-IC	PFM, step-up, 5.7V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C58	-	LC3030CCB5TR58	DC-DC-IC	PFM, step-up, 5.8V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C59	-	LC3030CCB5TR59	DC-DC-IC	PFM, step-up, 5.9V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C6	-	XC6227A361MR	LVR-IC	LDO, 3.6V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3C6	ej	XC6104C337MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3C60	-	LC3030CCB5TR60	DC-DC-IC	PFM, step-up, 6.0V±2%, 200mA, +CE	SOT-23-5	28sd	DC6	6a	Lch
3C7	-	XC6227A371MR	LVR-IC	LDO, 3.7V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3C7	ej	XC6104C338MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3C8	-	XC6227A381MR	LVR-IC	LDO, 3.8V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3C8	ej	XC6104C339MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3C9	-	XC6227A391MR	LVR-IC	LDO, 3.9V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3C9	ej	XC6104C340MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CA	-	XC6227A401MR	LVR-IC	LDO, 4.0V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3CA	ej	XC6104C341MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CB	-	XC6227A411MR	LVR-IC	LDO, 4.1V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3CB	ej	XC6104C342MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CC	-	XC6227A421MR	LVR-IC	LDO, 4.2V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3CC	ej	XC6104C343MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CD	-	XC6227A431MR	LVR-IC	LDO, 4.3V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3CD	ej	XC6104C344MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CE	-	XC6227A441MR	LVR-IC	LDO, 4.4V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3CE	ej	XC6104C345MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CF	-	XC6227A451MR	LVR-IC	LDO, 4.5V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3CF	ec	XC6104C316MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CF	ej	XC6104C346MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CH	-	XC6227A461MR	LVR-IC	LDO, 4.6V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3CH	ec	XC6104C317MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CH	ej	XC6104C347MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CK	-	XC6227A471MR	LVR-IC	LDO, 4.7V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3CK	ec	XC6104C318MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CK	ej	XC6104C348MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CL	-	XC6227A481MR	LVR-IC	LDO, 4.8V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3CL	ec	XC6104C319MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CL	ej	XC6104C349MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CM	-	XC6227A491MR	LVR-IC	LDO, 4.9V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3CM	ec	XC6104C320MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CM	ej	XC6104C350MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CN	-	XC6227A501MR	LVR-IC	LDO, 5.0V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3CN	ec	XC6104C321MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CP	ec	XC6104C322MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CR	ec	XC6104C323MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CS	ec	XC6104C324MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CT	ec	XC6104C325MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CU	ec	XC6104C326MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CV	ec	XC6104C327MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CX	ec	XC6104C328MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CY	ec	XC6104C329MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3CZ	ec	XC6104C330MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3D	-	R3111N331A	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
3D	-	RN5RL43AA	LVR-IC	4.3V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
3D	eu	RN5VD33CA	Vdet-IC	3.3V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
3D0	-	XC6227A30BMR	LVR-IC	LDO, 3.05V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3D0	ej	XC6104C431MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3D1	-	XC6227A31BMR	LVR-IC	LDO, 3.15V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3D1	ej	XC6104C432MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3D2	-	XC6227A32BMR	LVR-IC	LDO, 3.25V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3D2	ej	XC6104C433MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3D3	-	XC6227A33BMR	LVR-IC	LDO, 3.35V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3D3	ej	XC6104C434MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3D4	-	XC6227A34BMR	LVR-IC	LDO, 3.45V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3D4	ej	XC6104C435MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3D5	-	XC6227A35BMR	LVR-IC	LDO, 3.55V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3D5	ej	XC6104C436MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3D6	-	XC6227A36BMR	LVR-IC	LDO, 3.65V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3D6	ej	XC6104C437MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3D7	-	XC6227A37BMR	LVR-IC	LDO, 3.75V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3D7	ej	XC6104C438MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3D8	-	XC6227A38BMR	LVR-IC	LDO, 3.85V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3D8	ej	XC6104C439MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3D9	-	XC6227A39BMR	LVR-IC	LDO, 3.95V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3D9	ej	XC6104C440MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DA	-	XC6227A40BMR	LVR-IC	LDO, 4.05V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3DA	ej	XC6104C441MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DB	-	XC6227A41BMR	LVR-IC	LDO, 4.15V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3DB	ej	XC6104C442MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DC	-	XC6227A42BMR	LVR-IC	LDO, 4.25V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3DC	ej	XC6104C443MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DD	-	XC6227A43BMR	LVR-IC	LDO, 4.35V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3DD	ej	XC6104C444MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DE	-	XC6227A44BMR	LVR-IC	LDO, 4.45V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3DE	ej	XC6104C445MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DF	-	XC6227A45BMR	LVR-IC	LDO, 4.55V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3DF	ec	XC6104C416MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DF	ej	XC6104C446MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DH	-	XC6227A46BMR	LVR-IC	LDO, 4.65V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3DH	ec	XC6104C417MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DH	ej	XC6104C447MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DK	-	XC6227A47BMR	LVR-IC	LDO, 4.75V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3DK	ec	XC6104C418MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DK	ej	XC6104C448MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DL	-	XC6227A48BMR	LVR-IC	LDO, 4.85V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3DL	ec	XC6104C419MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DL	ej	XC6104C449MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DM	-	XC6227A49BMR	LVR-IC	LDO, 4.95V±1%, 700mA, +CE	SOT-25	28cx	VR4	6a	Tor
3DM	ec	XC6104C420MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DM	ej	XC6104C450MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DN	ec	XC6104C421MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DP	ec	XC6104C422MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DR	ec	XC6104C423MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DS	ec	XC6104C424MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DT	ec	XC6104C425MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DU	ec	XC6104C426MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DV	ec	XC6104C427MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DX	ec	XC6104C428MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DY	ec	XC6104C429MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3DZ	ec	XC6104C430MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3E	-	R3111N431A	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
3E	-	RN5RL53AA	LVR-IC	5.3V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
3E	eu	RN5VD43CA	Vdet-IC	4.3V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
3E0	ej	XC6104C531MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3E1	ej	XC6104C532MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3E2	ej	XC6104C533MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3E3	ej	XC6104C534MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3E4	ej	XC6104C535MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3E5	ej	XC6104C536MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3E6	ej	XC6104C537MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3E7	-	XC6221A08BMR	LVR-IC	LDO, 0.85V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3E7	ej	XC6104C538MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3E8	-	XC6221A09BMR	LVR-IC	LDO, 0.95V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3E8	-	XC6227C081MR	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3E8	ej	XC6104C539MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3E9	-	XC6221A10BMR	LVR-IC	LDO, 1.05V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3E9	-	XC6227C091MR	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3E9	ej	XC6104C540MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EA	-	XC6221A11BMR	LVR-IC	LDO, 1.15V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3EA	-	XC6227C101MR	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3EA	ej	XC6104C541MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EB	-	XC6221A12BMR	LVR-IC	LDO, 1.25V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3EB	-	XC6227C111MR	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3EB	ej	XC6104C542MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EC	-	XC6221A13BMR	LVR-IC	LDO, 1.35V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3EC	-	XC6227C121MR	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3EC	ej	XC6104C543MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3ED	-	XC6221A14BMR	LVR-IC	LDO, 1.45V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3ED	-	XC6227C131MR	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3ED	ej	XC6104C544MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EE	-	XC6221A15BMR	LVR-IC	LDO, 1.55V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3EE	-	XC6227C141MR	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3EE	ej	XC6104C545MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EF	-	XC6221A16BMR	LVR-IC	LDO, 1.65V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3EF	-	XC6227C151MR	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3EF	ec	XC6104C516MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EF	ej	XC6104C546MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EH	-	XC6221A17BMR	LVR-IC	LDO, 1.75V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3EH	-	XC6227C161MR	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3EH	ec	XC6104C517MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EH	ej	XC6104C547MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EK	-	XC6221A18BMR	LVR-IC	LDO, 1.85V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3EK	-	XC6227C171MR	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3EK	ec	XC6104C518MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EK	ej	XC6104C548MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EL	-	XC6221A19BMR	LVR-IC	LDO, 1.95V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3EL	-	XC6227C181MR	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3EL	ec	XC6104C519MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EL	ej	XC6104C549MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EM	-	XC6221A20BMR	LVR-IC	LDO, 2.05V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3EM	-	XC6227C191MR	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3EM	ec	XC6104C520MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EM	ej	XC6104C550MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EN	-	XC6221A21BMR	LVR-IC	LDO, 2.15V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3EN	-	XC6227C201MR	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3EN	ec	XC6104C521MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EP	-	XC6221A22BMR	LVR-IC	LDO, 2.25V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3EP	-	XC6227C211MR	LVR-IC	LDO, 2.1V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3EP	ec	XC6104C522MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3ER	-	XC6221A23BMR	LVR-IC	LDO, 2.35V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3ER	-	XC6227C221MR	LVR-IC	LDO, 2.2V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3ER	ec	XC6104C523MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3ES	-	XC6221A24BMR	LVR-IC	LDO, 2.45V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3ES	-	XC6227C231MR	LVR-IC	LDO, 2.3V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3ES	ec	XC6104C524MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3ET	-	XC6221A25BMR	LVR-IC	LDO, 2.55V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3ET	-	XC6227C241MR	LVR-IC	LDO, 2.4V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3ET	ec	XC6104C525MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EU	-	XC6221A26BMR	LVR-IC	LDO, 2.65V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3EU	-	XC6227C251MR	LVR-IC	LDO, 2.5V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3EU	ec	XC6104C526MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EV	-	XC6221A27BMR	LVR-IC	LDO, 2.75V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3EV	-	XC6227C261MR	LVR-IC	LDO, 2.6V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3EV	ec	XC6104C527MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EX	-	XC6221A28BMR	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3EX	-	XC6227C271MR	LVR-IC	LDO, 2.7V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3EX	ec	XC6104C528MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EY	-	XC6221A29BMR	LVR-IC	LDO, 2.95V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3EY	-	XC6227C281MR	LVR-IC	LDO, 2.8V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3EY	ec	XC6104C529MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3EZ	-	XC6221A30BMR	LVR-IC	LDO, 3.05V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3EZ	-	XC6227C291MR	LVR-IC	LDO, 2.9V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3EZ	ec	XC6104C530MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3F	-	R3111N531A	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
3F	eu	RN5VD53CA	Vdet-IC	5.3V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
3F0	ej	XC6104C631MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3F1	ej	XC6104C632MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3F2	ej	XC6104C633MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3F3	ej	XC6104C634MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3F4	ej	XC6104C635MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3F5	ej	XC6104C636MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3F6	ej	XC6104C637MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3F7	-	XC6221B08BMR	LVR-IC	LDO, 0.85V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3F7	ej	XC6104C638MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3F8	-	XC6221B09BMR	LVR-IC	LDO, 0.95V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3F8	-	XC6227C08BMR	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3F8	ej	XC6104C639MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3F9	-	XC6221B10BMR	LVR-IC	LDO, 1.05V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3F9	-	XC6227C09BMR	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3F9	ej	XC6104C640MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FA	-	XC6221B11BMR	LVR-IC	LDO, 1.15V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FA	-	XC6227C10BMR	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FA	ej	XC6104C641MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FB	-	XC6221B12BMR	LVR-IC	LDO, 1.25V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FB	-	XC6227C11BMR	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FB	ej	XC6104C642MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FC	-	XC6221B13BMR	LVR-IC	LDO, 1.35V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FC	-	XC6227C12BMR	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3FC	ej	XC6104C643MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FD	-	XC6221B14BMR	LVR-IC	LDO, 1.45V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FD	-	XC6227C13BMR	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FD	ej	XC6104C644MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FE	-	XC6221B15BMR	LVR-IC	LDO, 1.55V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FE	-	XC6227C14BMR	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FE	ej	XC6104C645MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FF	-	XC6221B16BMR	LVR-IC	LDO, 1.65V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FF	-	XC6227C15BMR	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FF	ec	XC6104C616MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FF	ej	XC6104C646MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FH	-	XC6221B17BMR	LVR-IC	LDO, 1.75V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FH	-	XC6227C16BMR	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FH	ec	XC6104C617MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FH	ej	XC6104C647MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FK	-	XC6221B18BMR	LVR-IC	LDO, 1.85V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FK	-	XC6227C17BMR	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FK	ec	XC6104C618MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FK	ej	XC6104C648MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FL	-	XC6221B19BMR	LVR-IC	LDO, 1.95V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FL	-	XC6227C18BMR	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FL	ec	XC6104C619MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FL	ej	XC6104C649MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FM	-	XC6221B20BMR	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FM	-	XC6227C19BMR	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FM	ec	XC6104C620MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FM	ej	XC6104C650MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FN	-	XC6221B21BMR	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FN	-	XC6227C20BMR	LVR-IC	LDO, 2.05V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FN	ec	XC6104C621MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FP	-	XC6221B22BMR	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FP	-	XC6227C21BMR	LVR-IC	LDO, 2.15V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FP	ec	XC6104C622MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FR	-	XC6221B23BMR	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FR	-	XC6227C22BMR	LVR-IC	LDO, 2.25V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FR	ec	XC6104C623MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FS	-	XC6221B24BMR	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FS	-	XC6227C23BMR	LVR-IC	LDO, 2.35V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FS	ec	XC6104C624MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FT	-	XC6221B25BMR	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FT	-	XC6227C24BMR	LVR-IC	LDO, 2.45V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FT	ec	XC6104C625MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FU	-	XC6221B26BMR	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FU	-	XC6227C25BMR	LVR-IC	LDO, 2.55V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FU	ec	XC6104C626MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FV	-	XC6221B27BMR	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FV	-	XC6227C26BMR	LVR-IC	LDO, 2.65V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FV	ec	XC6104C627MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FX	-	XC6221B28BMR	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FX	-	XC6227C27BMR	LVR-IC	LDO, 2.75V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FX	ec	XC6104C628MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FY	-	XC6221B29BMR	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FY	-	XC6227C28BMR	LVR-IC	LDO, 2.85V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FY	ec	XC6104C629MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3FZ	-	XC6221B30BMR	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3FZ	-	XC6227C29BMR	LVR-IC	LDO, 2.95V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3FZ	ec	XC6104C630MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
3GA	-	AP6233A-25NHFGP	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GA	-	AP6233A-25NHFPP	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3GA	eb	AP6233A-25NHFGA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GA	eb	AP6233A-25NHFPA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3GA	ec	AP6233A-25NHFGA1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GA	ec	AP6233A-25NHFPA1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3GA	eh	AP6233A-25NHFGP1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GA	eh	AP6233A-25NHFPP1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3GB	-	AP6233A-25NLFGP	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GB	-	AP6233A-25NLFPP	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3GB	eb	AP6233A-25NLFGA	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GB	eb	AP6233A-25NLFPA	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3GB	ec	AP6233A-25NLFGA1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3GB	ec	AP6233A-25NLFPA1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3GB	eh	AP6233A-25NLFGP1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GB	eh	AP6233A-25NLFPP1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3GC	-	AP6233A-25NHNGP	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GC	-	AP6233A-25NHNPP	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
3GC	eb	AP6233A-25NHNGA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GC	eb	AP6233A-25NHNPA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
3GC	ec	AP6233A-25NHNGA1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GC	ec	AP6233A-25NHNPA1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
3GC	eh	AP6233A-25NHNGP1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GC	eh	AP6233A-25NHNPP1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
3GD	-	AP6233A-25NLNGP	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GD	-	AP6233A-25NLNPP	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
3GD	eb	AP6233A-25NLNGA	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GD	eb	AP6233A-25NLNPA	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
3GD	ec	AP6233A-25NLNGA1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GD	ec	AP6233A-25NLNPA1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
3GD	eh	AP6233A-25NLNGP1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GD	eh	AP6233A-25NLNPP1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
3GE	-	AP6233A-25UHFGP	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GE	-	AP6233A-25UHFPP	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3GE	eb	AP6233A-25UHFGA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GE	eb	AP6233A-25UHFPA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3GE	ec	AP6233A-25UHFGA1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GE	ec	AP6233A-25UHFPA1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3GE	eh	AP6233A-25UHFGP1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GE	eh	AP6233A-25UHFPP1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3GF	-	AP6233A-25ULFGP	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GF	-	AP6233A-25ULFPP	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3GF	eb	AP6233A-25ULFGA	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GF	eb	AP6233A-25ULFPA	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3GF	ec	AP6233A-25ULFGA1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GF	ec	AP6233A-25ULFPA1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3GF	eh	AP6233A-25ULFGP1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GF	eh	AP6233A-25ULFPP1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3GG	-	AP6233A-25UHNGP	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GG	-	AP6233A-25UHNPP	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3GG	eb	AP6233A-25UHNGA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GG	eb	AP6233A-25UHNPA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3GG	ec	AP6233A-25UHNGA1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GG	ec	AP6233A-25UHNPA1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3GG	eh	AP6233A-25UHNGP1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GG	eh	AP6233A-25UHNPP1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3GH	-	AP6233A-25ULNGP	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GH	-	AP6233A-25ULNPP	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3GH	eb	AP6233A-25ULNGA	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GH	eb	AP6233A-25ULNPA	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3GH	ec	AP6233A-25ULNGA1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GH	ec	AP6233A-25ULNPA1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3GH	eh	AP6233A-25ULNGP1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GH	eh	AP6233A-25ULNPP1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3GJ	-	AP6233A-25DHFGP	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GJ	-	AP6233A-25DHFPP	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3GJ	eb	AP6233A-25DHFGA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GJ	eb	AP6233A-25DHFPA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3GJ	ec	AP6233A-25DHFGA1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GJ	ec	AP6233A-25DHFPA1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3GJ	eh	AP6233A-25DHFGP1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GJ	eh	AP6233A-25DHFPP1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3GK	-	AP6233A-25DLFGP	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GK	-	AP6233A-25DLFPP	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3GK	eb	AP6233A-25DLFGA	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GK	eb	AP6233A-25DLFPA	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3GK	ec	AP6233A-25DLFGA1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GK	ec	AP6233A-25DLFPA1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3GK	eh	AP6233A-25DLFGP1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GK	eh	AP6233A-25DLFPP1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3GL	-	AP6233A-25DHNGP	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GL	-	AP6233A-25DHNPP	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3GL	eb	AP6233A-25DHNGA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3GL	eb	AP6233A-25DHNPA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3GL	ec	AP6233A-25DHNGA1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GL	ec	AP6233A-25DHNPA1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3GL	eh	AP6233A-25DHNGP1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GL	eh	AP6233A-25DHNPP1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3GM	-	AP6233A-25DLNGP	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GM	-	AP6233A-25DLNPP	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3GM	eb	AP6233A-25DLNGA	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GM	eb	AP6233A-25DLNPA	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3GM	ec	AP6233A-25DLNGA1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3GM	ec	AP6233A-25DLNPA1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3GM	eh	AP6233A-25DLNGP1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3GM	eh	AP6233A-25DLNPP1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3H0	-	XC6227C301MR	LVR-IC	LDO, 3.0V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3H0	ej	XC6104D331MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3H1	-	XC6227C311MR	LVR-IC	LDO, 3.1V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3H1	ej	XC6104D332MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3H2	-	XC6227C321MR	LVR-IC	LDO, 3.2V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3H2	ej	XC6104D333MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3H3	-	XC6227C331MR	LVR-IC	LDO, 3.3V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3H3	ej	XC6104D334MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3H4	-	XC6227C341MR	LVR-IC	LDO, 3.4V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3H4	ej	XC6104D335MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3H5	-	XC6227C351MR	LVR-IC	LDO, 3.5V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3H5	ej	XC6104D336MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3H6	-	XC6227C361MR	LVR-IC	LDO, 3.6V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3H6	ej	XC6104D337MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3H7	-	XC6227C371MR	LVR-IC	LDO, 3.7V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3H7	ej	XC6104D338MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3H8	-	XC6227C381MR	LVR-IC	LDO, 3.8V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3H8	ej	XC6104D339MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3H9	-	XC6227C391MR	LVR-IC	LDO, 3.9V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3H9	ej	XC6104D340MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HA	-	XC6227C401MR	LVR-IC	LDO, 4.0V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3HA	ej	XC6104D341MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HB	-	XC6227C411MR	LVR-IC	LDO, 4.1V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3HB	ej	XC6104D342MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HC	-	XC6227C421MR	LVR-IC	LDO, 4.2V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3HC	ej	XC6104D343MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HD	-	XC6227C431MR	LVR-IC	LDO, 4.3V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3HD	ej	XC6104D344MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HE	-	XC6227C441MR	LVR-IC	LDO, 4.4V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3HE	ej	XC6104D345MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HF	-	XC6227C451MR	LVR-IC	LDO, 4.5V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3HF	ec	XC6104D316MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HF	ej	XC6104D346MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HH	-	XC6227C461MR	LVR-IC	LDO, 4.6V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3HH	ec	XC6104D317MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HH	ej	XC6104D347MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HK	-	XC6227C471MR	LVR-IC	LDO, 4.7V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3HK	ec	XC6104D318MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HK	ej	XC6104D348MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HL	-	XC6227C481MR	LVR-IC	LDO, 4.8V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3HL	ec	XC6104D319MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HL	ej	XC6104D349MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HM	-	XC6227C491MR	LVR-IC	LDO, 4.9V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3HM	ec	XC6104D320MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HM	ej	XC6104D350MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HN	-	XC6227C501MR	LVR-IC	LDO, 5.0V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3HN	ec	XC6104D321MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HP	ec	XC6104D322MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HR	ec	XC6104D323MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HS	ec	XC6104D324MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HT	ec	XC6104D325MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HU	ec	XC6104D326MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HV	ec	XC6104D327MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HX	ec	XC6104D328MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HY	ec	XC6104D329MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3HZ	ec	XC6104D330MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3J	-	R3111N131C	Vdet-IC	1.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3K	-	R3111N231C	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
3K0	-	XC6227C30BMR	LVR-IC	LDO, 3.05V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3K0	ej	XC6104D431MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3K1	-	XC6227C31BMR	LVR-IC	LDO, 3.15V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3K1	ej	XC6104D432MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3K2	-	XC6227C32BMR	LVR-IC	LDO, 3.25V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3K2	ej	XC6104D433MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3K3	-	XC6227C33BMR	LVR-IC	LDO, 3.35V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3K3	ej	XC6104D434MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3K4	-	XC6227C34BMR	LVR-IC	LDO, 3.45V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3K4	ej	XC6104D435MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3K5	-	XC6227C35BMR	LVR-IC	LDO, 3.55V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3K5	ej	XC6104D436MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3K6	-	XC6227C36BMR	LVR-IC	LDO, 3.65V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3K6	ej	XC6104D437MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3K7	-	XC6227C37BMR	LVR-IC	LDO, 3.75V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3K7	ej	XC6104D438MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3K8	-	XC6227C38BMR	LVR-IC	LDO, 3.85V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3K8	ej	XC6104D439MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3K9	-	XC6227C39BMR	LVR-IC	LDO, 3.95V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3K9	ej	XC6104D440MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KA	-	XC6227C40BMR	LVR-IC	LDO, 4.05V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3KA	ej	XC6104D441MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KB	-	XC6227C41BMR	LVR-IC	LDO, 4.15V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3KB	ej	XC6104D442MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KC	-	XC6227C42BMR	LVR-IC	LDO, 4.25V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3KC	ej	XC6104D443MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KD	-	XC6227C43BMR	LVR-IC	LDO, 4.35V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3KD	ej	XC6104D444MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KE	-	XC6227C44BMR	LVR-IC	LDO, 4.45V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3KE	ej	XC6104D445MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KF	-	XC6227C45BMR	LVR-IC	LDO, 4.55V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3KF	ec	XC6104D416MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KF	ej	XC6104D446MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KH	-	XC6227C46BMR	LVR-IC	LDO, 4.65V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3KH	ec	XC6104D417MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KH	ej	XC6104D447MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KK	-	XC6227C47BMR	LVR-IC	LDO, 4.75V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3KK	ec	XC6104D418MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KK	ej	XC6104D448MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KL	-	XC6227C48BMR	LVR-IC	LDO, 4.85V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3KL	ec	XC6104D419MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KL	ej	XC6104D449MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KM	-	XC6227C49BMR	LVR-IC	LDO, 4.95V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6a	Tor
3KM	ec	XC6104D420MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KM	ej	XC6104D450MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KN	ec	XC6104D421MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KP	ec	XC6104D422MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KR	ec	XC6104D423MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KS	ec	XC6104D424MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KT	ec	XC6104D425MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KU	ec	XC6104D426MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KV	ec	XC6104D427MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KX	ec	XC6104D428MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KY	ec	XC6104D429MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3KZ	ec	XC6104D430MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3L	-	R3111N331C	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
3L0	-	XC6221A31BMR	LVR-IC	LDO, 3.15V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3L0	ej	XC6104D531MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3L1	-	XC6221A32BMR	LVR-IC	LDO, 3.25V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3L1	ej	XC6104D532MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3L2	-	XC6221A33BMR	LVR-IC	LDO, 3.35V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3L2	ej	XC6104D533MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3L3	-	XC6221A34BMR	LVR-IC	LDO, 3.45V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3L3	ej	XC6104D534MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3L4	-	XC6221A35BMR	LVR-IC	LDO, 3.55V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3L4	ej	XC6104D535MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3L5	-	XC6221A36BMR	LVR-IC	LDO, 3.65V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3L5	eb	AP6203L-12GA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3L5	eb	AP6203L-12PA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, CL	SOT-25	28cx	VR4	6k	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3L5	ej	XC6104D536MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3L6	-	XC6221A37BMR	LVR-IC	LDO, 3.75V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3L6	ej	XC6104D537MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3L7	-	XC6221A38BMR	LVR-IC	LDO, 3.85V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3L7	ej	XC6104D538MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3L8	-	XC6221A39BMR	LVR-IC	LDO, 3.95V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3L8	eb	AP6203L-15GA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3L8	eb	AP6203L-15PA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, CL	SOT-25	28cx	VR4	6k	Anw
3L8	ej	XC6104D539MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3L9	-	XC6221A40BMR	LVR-IC	LDO, 4.05±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3L9	ej	XC6104D540MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LA	-	AP6233A-285NHFGP	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LA	-	AP6233A-285NHFPP	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3LA	-	XC6221A41BMR	LVR-IC	LDO, 4.15±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3LA	eb	AP6203L-18GA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LA	eb	AP6203L-18PA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, CL	SOT-25	28cx	VR4	6k	Anw
3LA	eb	AP6233A-285NHFGA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LA	eb	AP6233A-285NHFPA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3LA	ec	AP6233A-285NHFGA1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LA	ec	AP6233A-285NHFPA1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3LA	eh	AP6233A-285NHFGP1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LA	eh	AP6233A-285NHFPP1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3LA	ej	XC6104D541MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LB	-	AP6233A-285NLFGP	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LB	-	AP6233A-285NLFPP	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3LB	-	XC6221A42BMR	LVR-IC	LDO, 4.25±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3LB	eb	AP6233A-285NLFGA	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LB	eb	AP6233A-285NLFPA	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3LB	ec	AP6233A-285NLFGA1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LB	ec	AP6233A-285NLFPA1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3LB	eh	AP6233A-285NLFGP1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LB	eh	AP6233A-285NLFPP1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3LB	ej	XC6104D542MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LC	-	AP6233A-285NHNGP	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LC	-	AP6233A-285NHNPP	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
3LC	-	XC6221A43BMR	LVR-IC	LDO, 4.35±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3LC	eb	AP6233A-285NHNGA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LC	eb	AP6233A-285NHNPA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
3LC	ec	AP6233A-285NHNGA1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LC	ec	AP6233A-285NHNPA1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
3LC	eh	AP6233A-285NHNGP1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LC	eh	AP6233A-285NHNPP1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
3LC	ej	XC6104D543MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LD	-	AP6233A-285NLNGP	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LD	-	AP6233A-285NLNPP	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
3LD	-	XC6221A44BMR	LVR-IC	LDO, 4.45±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3LD	eb	AP6233A-285NLNGA	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LD	eb	AP6233A-285NLNPA	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
3LD	ec	AP6233A-285NLNGA1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LD	ec	AP6233A-285NLNPA1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
3LD	eh	AP6233A-285NLNGP1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LD	eh	AP6233A-285NLNPP1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
3LD	ej	XC6104D544MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LE	-	AP6233A-285UHFGP	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LE	-	AP6233A-285UHFPP	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3LE	-	XC6221A45BMR	LVR-IC	LDO, 4.55±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3LE	eb	AP6233A-285UHFGA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LE	eb	AP6233A-285UHFPA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3LE	ec	AP6233A-285UHFGA1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LE	ec	AP6233A-285UHFPA1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3LE	eh	AP6233A-285UHFGP1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LE	eh	AP6233A-285UHFPP1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3LE	ej	XC6104D545MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LF	-	AP6233A-285ULFGP	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LF	-	AP6233A-285ULFPP	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3LF	-	XC6221A46BMR	LVR-IC	LDO, 4.65±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3LF	eb	AP6233A-285ULFGA	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LF	eb	AP6233A-285ULFPA	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3LF	ec	AP6233A-285ULFGA1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LF	ec	AP6233A-285ULFPA1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3LF	ec	XC6104D516MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LF	eh	AP6233A-285ULFGP1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LF	eh	AP6233A-285ULFPP1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3LF	ej	XC6104D546MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LG	-	AP6233A-285UHNGP	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LG	-	AP6233A-285UHNPP	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3LG	eb	AP6203L-25GA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LG	eb	AP6203L-25PA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, CL	SOT-25	28cx	VR4	6k	Anw
3LG	eb	AP6233A-285UHNGA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LG	eb	AP6233A-285UHNPA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3LG	ec	AP6233A-285UHNGA1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LG	ec	AP6233A-285UHNPA1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3LG	eh	AP6233A-285UHNGP1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LG	eh	AP6233A-285UHNPP1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3LH	-	AP6233A-285ULNGP	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LH	-	AP6233A-285ULNPP	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3LH	-	XC6221A47BMR	LVR-IC	LDO, 4.75±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3LH	eb	AP6233A-285ULNGA	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LH	eb	AP6233A-285ULNPA	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3LH	ec	AP6233A-285ULNGA1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LH	ec	AP6233A-285ULNPA1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3LH	ec	XC6104D517MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LH	eh	AP6233A-285ULNGP1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LH	eh	AP6233A-285ULNPP1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3LH	ej	XC6104D547MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LJ	-	AP6233A-285DHFGP	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LJ	-	AP6233A-285DHFPP	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3LJ	eb	AP6203L-27GA	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LJ	eb	AP6203L-27PA	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, CL	SOT-25	28cx	VR4	6k	Anw
3LJ	eb	AP6233A-285DHFGA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LJ	eb	AP6233A-285DHFPA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3LJ	ec	AP6233A-285DHFGA1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LJ	ec	AP6233A-285DHFPA1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3LJ	eh	AP6233A-285DHFGP1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LJ	eh	AP6233A-285DHFPP1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3LK	-	AP6233A-285DLFGP	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LK	-	AP6233A-285DLFPP	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3LK	-	XC6221A48BMR	LVR-IC	LDO, 4.85±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3LK	eb	AP6203L-28GA	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LK	eb	AP6203L-28PA	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, CL	SOT-25	28cx	VR4	6k	Anw
3LK	eb	AP6233A-285DLFGA	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LK	eb	AP6233A-285DLFPA	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3LK	ec	AP6233A-285DLFGA1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LK	ec	AP6233A-285DLFPA1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3LK	ec	XC6104D518MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LK	eh	AP6233A-285DLFGP1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LK	eh	AP6233A-285DLFPP1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3LK	ej	XC6104D548MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LL	-	AP6233A-285DHNGP	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LL	-	AP6233A-285DHNPP	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3LL	-	XC6221A49BMR	LVR-IC	LDO, 4.95±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3LL	eb	AP6203L-LLGA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LL	eb	AP6203L-LLPA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, CL	SOT-25	28cx	VR4	6k	Anw
3LL	eb	AP6233A-285DHNGA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LL	eb	AP6233A-285DHNPA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3LL	ec	AP6233A-285DHNGA1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LL	ec	AP6233A-285DHNPA1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3LL	ec	XC6104D519MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LL	eh	AP6233A-285DHNGP1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LL	eh	AP6233A-285DHNPP1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3LL	ej	XC6104D549MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LM	-	AP6233A-285DLNGP	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LM	-	AP6233A-285DLNPP	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3LM	eb	AP6203L-30GA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LM	eb	AP6203L-30PA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, CL	SOT-25	28cx	VR4	6k	Anw
3LM	eb	AP6233A-285DLNGA	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LM	eb	AP6233A-285DLNPA	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3LM	ec	AP6233A-285DLNGA1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LM	ec	AP6233A-285DLNPA1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3LM	ec	XC6104D520MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3LM	eh	AP6233A-285DLNGP1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3LM	eh	AP6233A-285DLNPP1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3LM	ej	XC6104D550MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LN	ec	XC6104D521MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LP	ec	XC6104D522MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LQ	eb	AP6203L-33GA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LQ	eb	AP6203L-33PA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, CL	SOT-25	28cx	VR4	6k	Anw
3LR	ec	XC6104D523MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LS	eb	AP6203L-42GA	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LS	eb	AP6203L-42PA	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, CL	SOT-25	28cx	VR4	6k	Anw
3LS	ec	XC6104D524MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LT	ec	XC6104D525MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LU	ec	XC6104D526MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LV	eb	AP6203L-36GA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3LV	eb	AP6203L-36PA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, CL	SOT-25	28cx	VR4	6k	Anw
3LV	ec	XC6104D527MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LX	ec	XC6104D528MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LY	ec	XC6104D529MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3LZ	ec	XC6104D530MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3M	-	R3111N431C	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
3M0	-	XC6221B31BMR	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3M0	ej	XC6104D631MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3M1	-	S-19100C38A-M5T2U	Vdet-IC	3.8V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3M1	-	XC6221B32BMR	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3M1	ej	XC6104D632MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3M2	-	S-19100C39A-M5T2U	Vdet-IC	3.9V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3M2	-	XC6221B33BMR	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3M2	ej	XC6104D633MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3M3	-	S-19100C40A-M5T2U	Vdet-IC	4.0V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3M3	-	XC6221B34BMR	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3M3	ej	XC6104D634MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3M4	-	S-19100C41A-M5T2U	Vdet-IC	4.1V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3M4	-	XC6221B35BMR	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3M4	ej	XC6104D635MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3M5	-	S-19100C42A-M5T2U	Vdet-IC	4.2V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3M5	-	XC6221B36BMR	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3M5	ej	XC6104D636MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3M6	-	S-19100C43A-M5T2U	Vdet-IC	4.3V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3M6	-	XC6221B37BMR	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3M6	ej	XC6104D637MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3M7	-	S-19100C44A-M5T2U	Vdet-IC	4.4V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3M7	-	XC6221B38BMR	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3M7	ej	XC6104D638MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3M8	-	S-19100C45A-M5T2U	Vdet-IC	4.5V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3M8	-	XC6221B39BMR	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3M8	ej	XC6104D639MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3M9	-	S-19100C46A-M5T2U	Vdet-IC	4.6V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3M9	-	XC6221B40BMR	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3M9	ej	XC6104D640MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MA	-	AP6233A-30NHFGP	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MA	-	AP6233A-30NHFPP	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3MA	-	S-19100C12A-M5T2U	Vdet-IC	1.2V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MA	-	XC6221B41BMR	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3MA	eb	AP6233A-30NHFGA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MA	eb	AP6233A-30NHFPA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3MA	ec	AP6233A-30NHFGA1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MA	ec	AP6233A-30NHFPA1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3MA	eh	AP6233A-30NHFGP1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MA	eh	AP6233A-30NHFPP1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3MA	ej	XC6104D641MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MB	-	AP6233A-30NLFGP	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MB	-	AP6233A-30NLFPP	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3MB	-	S-19100C13A-M5T2U	Vdet-IC	1.3V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MB	-	XC6221B42BMR	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3MB	eb	AP6233A-30NLFGA	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MB	eb	AP6233A-30NLFPA	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3MB	ec	AP6233A-30NLFGA1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MB	ec	AP6233A-30NLFPA1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3MB	eh	AP6233A-30NLFGP1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MB	eh	AP6233A-30NLFPP1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3MB	ej	XC6104D642MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MC	-	AP6233A-30NHNGP	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MC	-	AP6233A-30NHNPP	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
3MC	-	S-19100C14A-M5T2U	Vdet-IC	1.4V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MC	-	XC6221B43BMR	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3MC	eb	AP6233A-30NHNGA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MC	eb	AP6233A-30NHNPA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
3MC	ec	AP6233A-30NHNGA1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MC	ec	AP6233A-30NHNPA1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
3MC	eh	AP6233A-30NHNGP1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MC	eh	AP6233A-30NHNPP1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
3MC	ej	XC6104D643MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MD	-	AP6233A-30NLNGP	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MD	-	AP6233A-30NLNPP	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
3MD	-	S-19100C15A-M5T2U	Vdet-IC	1.5V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MD	-	XC6221B44BMR	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3MD	eb	AP6233A-30NLNGA	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MD	eb	AP6233A-30NLNPA	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
3MD	ec	AP6233A-30NLNGA1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MD	ec	AP6233A-30NLNPA1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
3MD	eh	AP6233A-30NLNGP1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MD	eh	AP6233A-30NLNPP1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
3MD	ej	XC6104D644MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3ME	-	AP6233A-30UHFGP	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ME	-	AP6233A-30UHFPP	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3ME	-	S-19100C16A-M5T2U	Vdet-IC	1.6V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3ME	-	XC6221B45BMR	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3ME	eb	AP6233A-30UHFGA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ME	eb	AP6233A-30UHFPA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3ME	ec	AP6233A-30UHFGA1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ME	ec	AP6233A-30UHFPA1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3ME	eh	AP6233A-30UHFGP1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ME	eh	AP6233A-30UHFPP1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3ME	ej	XC6104D645MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MF	-	AP6233A-30ULFGP	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MF	-	AP6233A-30ULFPP	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3MF	-	S-19100C17A-M5T2U	Vdet-IC	1.7V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MF	-	XC6221B46BMR	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3MF	eb	AP6233A-30ULFGA	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MF	eb	AP6233A-30ULFPA	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3MF	ec	AP6233A-30ULFGA1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MF	ec	AP6233A-30ULFPA1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3MF	ec	XC6104D616MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MF	eh	AP6233A-30ULFGP1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MF	eh	AP6233A-30ULFPP1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3MF	ej	XC6104D646MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MG	-	AP6233A-30UHNGP	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MG	-	AP6233A-30UHNPP	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3MG	-	S-19100C18A-M5T2U	Vdet-IC	1.8V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MG	eb	AP6233A-30UHNGA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MG	eb	AP6233A-30UHNPA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3MG	ec	AP6233A-30UHNGA1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MG	ec	AP6233A-30UHNPA1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3MG	eh	AP6233A-30UHNGP1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MG	eh	AP6233A-30UHNPP1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3MH	-	AP6233A-30ULNGP	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MH	-	AP6233A-30ULNPP	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3MH	-	S-19100C19A-M5T2U	Vdet-IC	1.9V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MH	-	XC6221B47BMR	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3MH	eb	AP6233A-30ULNGA	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MH	eb	AP6233A-30ULNPA	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3MH	ec	AP6233A-30ULNGA1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MH	ec	AP6233A-30ULNPA1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3MH	ec	XC6104D617MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MH	eh	AP6233A-30ULNGP1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MH	eh	AP6233A-30ULNPP1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3MH	ej	XC6104D647MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MI	-	S-19100C20A-M5T2U	Vdet-IC	2.0V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MJ	-	AP6233A-30DHFGP	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MJ	-	AP6233A-30DHFPP	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3MJ	-	S-19100C21A-M5T2U	Vdet-IC	2.1V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MJ	eb	AP6233A-30DHFGA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MJ	eb	AP6233A-30DHFPA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3MJ	ec	AP6233A-30DHFGA1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MJ	ec	AP6233A-30DHFPA1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3MJ	eh	AP6233A-30DHFGP1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MJ	eh	AP6233A-30DHFPP1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3MK	-	AP6233A-30DLFGP	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MK	-	AP6233A-30DLFPP	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3MK	-	S-19100C22A-M5T2U	Vdet-IC	2.2V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MK	-	XC6221B48BMR	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3MK	eb	AP6233A-30DLFGA	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MK	eb	AP6233A-30DLFPA	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3MK	ec	AP6233A-30DLFGA1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MK	ec	AP6233A-30DLFPA1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3MK	ec	XC6104D618MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MK	eh	AP6233A-30DLFGP1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MK	eh	AP6233A-30DLFPP1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3MK	ej	XC6104D648MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3ML	-	AP6233A-30DHNGP	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ML	-	AP6233A-30DHNPP	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3ML	-	S-19100C23A-M5T2U	Vdet-IC	2.3V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3ML	-	XC6221B49BMR	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3ML	eb	AP6233A-30DHNGA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ML	eb	AP6233A-30DHNPA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3ML	ec	AP6233A-30DHNGA1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ML	ec	AP6233A-30DHNPA1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3ML	ec	XC6104D619MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3ML	eh	AP6233A-30DHNGP1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ML	eh	AP6233A-30DHNPP1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3ML	ej	XC6104D649MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MM	-	AP6233A-30DLNGP	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MM	-	AP6233A-30DLNPP	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3MM	-	S-19100C24A-M5T2U	Vdet-IC	2.4V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MM	eb	AP6233A-30DLNGA	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MM	eb	AP6233A-30DLNPA	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3MM	ec	AP6233A-30DLNGA1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3MM	ec	AP6233A-30DLNPA1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3MM	ec	XC6104D620MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MM	eh	AP6233A-30DLNGP1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3MM	eh	AP6233A-30DLNPP1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3MM	ej	XC6104D650MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MN	-	S-19100C25A-M5T2U	Vdet-IC	2.5V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MN	ec	XC6104D621MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MO	-	S-19100C26A-M5T2U	Vdet-IC	2.6V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MP	-	S-19100C27A-M5T2U	Vdet-IC	2.7V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MP	ec	XC6104D622MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MQ	-	S-19100C28A-M5T2U	Vdet-IC	2.8V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MR	-	S-19100C29A-M5T2U	Vdet-IC	2.9V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MR	ec	XC6104D623MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MS	-	S-19100C30A-M5T2U	Vdet-IC	3.0V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MS	ec	XC6104D624MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MT	-	S-19100C31A-M5T2U	Vdet-IC	3.1V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MT	ec	XC6104D625MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MU	-	S-19100C32A-M5T2U	Vdet-IC	3.2V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MU	ec	XC6104D626MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MV	-	S-19100C33A-M5T2U	Vdet-IC	3.3V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MV	ec	XC6104D627MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MW	-	S-19100C34A-M5T2U	Vdet-IC	3.4V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MX	-	S-19100C35A-M5T2U	Vdet-IC	3.5V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MX	ec	XC6104D628MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MY	-	S-19100C36A-M5T2U	Vdet-IC	3.6V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MY	ec	XC6104D629MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3MZ	-	S-19100C37A-M5T2U	Vdet-IC	3.7V±3%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3MZ	ec	XC6104D630MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
3N	-	R3111N531C	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
3N1	-	S-19100N38A-M5T2U	Vdet-IC	3.8V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3N2	-	S-19100N39A-M5T2U	Vdet-IC	3.9V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3N3	-	S-19100N40A-M5T2U	Vdet-IC	4.0V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3N4	-	S-19100N41A-M5T2U	Vdet-IC	4.1V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3N5	-	S-19100N42A-M5T2U	Vdet-IC	4.2V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3N6	-	S-19100N43A-M5T2U	Vdet-IC	4.3V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3N7	-	S-19100N44A-M5T2U	Vdet-IC	4.4V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3N8	-	S-19100N45A-M5T2U	Vdet-IC	4.5V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3N9	-	S-19100N46A-M5T2U	Vdet-IC	4.6V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NA	-	AP6233A-31NHFGP	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NA	-	AP6233A-31NHFPP	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3NA	-	S-19100N12A-M5T2U	Vdet-IC	1.2V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NA	eb	AP6233A-31NHFGA	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NA	eb	AP6233A-31NHFPA	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3NA	ec	AP6233A-31NHFGA1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NA	ec	AP6233A-31NHFPA1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3NA	eh	AP6233A-31NHFGP1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NA	eh	AP6233A-31NHFPP1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3NB	-	AP6233A-31NLFGP	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NB	-	AP6233A-31NLFPP	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3NB	-	S-19100N13A-M5T2U	Vdet-IC	1.3V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NB	eb	AP6233A-31NLFGA	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NB	eb	AP6233A-31NLFPA	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3NB	ec	AP6233A-31NLFGA1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NB	ec	AP6233A-31NLFPA1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3NB	eh	AP6233A-31NLFGP1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NB	eh	AP6233A-31NLFPP1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3NC	-	AP6233A-31NHNGP	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NC	-	AP6233A-31NHNPP	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
3NC	-	S-19100N14A-M5T2U	Vdet-IC	1.4V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NC	eb	AP6233A-31NHNGA	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NC	eb	AP6233A-31NHNPA	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
3NC	ec	AP6233A-31NHNGA1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NC	ec	AP6233A-31NHNPA1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
3NC	eh	AP6233A-31NHNGP1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NC	eh	AP6233A-31NHNPP1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
3ND	-	AP6233A-31NLNGP	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ND	-	AP6233A-31NLNPP	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
3ND	-	S-19100N15A-M5T2U	Vdet-IC	1.5V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3ND	eb	AP6233A-31NLNGA	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ND	eb	AP6233A-31NLNPA	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
3ND	ec	AP6233A-31NLNGA1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ND	ec	AP6233A-31NLNPA1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
3ND	eh	AP6233A-31NLNGP1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ND	eh	AP6233A-31NLNPP1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
3NE	-	AP6233A-31UHFGP	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NE	-	AP6233A-31UHFPP	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3NE	-	S-19100N16A-M5T2U	Vdet-IC	1.6V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NE	eb	AP6233A-31UHFGA	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NE	eb	AP6233A-31UHFPA	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3NE	ec	AP6233A-31UHFGA1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NE	ec	AP6233A-31UHFPA1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3NE	eh	AP6233A-31UHFGP1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NE	eh	AP6233A-31UHFPP1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3NF	-	AP6233A-31ULFGP	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NF	-	AP6233A-31ULFPP	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3NF	-	S-19100N17A-M5T2U	Vdet-IC	1.7V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NF	eb	AP6233A-31ULFGA	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NF	eb	AP6233A-31ULFPA	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3NF	ec	AP6233A-31ULFGA1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NF	ec	AP6233A-31ULFPA1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3NF	eh	AP6233A-31ULFGP1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NF	eh	AP6233A-31ULFPP1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3NG	-	AP6233A-31UHNGP	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NG	-	AP6233A-31UHNPP	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3NG	-	S-19100N18A-M5T2U	Vdet-IC	1.8V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NG	eb	AP6233A-31UHNGA	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NG	eb	AP6233A-31UHNPA	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3NG	ec	AP6233A-31UHNGA1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NG	ec	AP6233A-31UHNPA1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3NG	eh	AP6233A-31UHNGP1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NG	eh	AP6233A-31UHNPP1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3NH	-	AP6233A-31ULNGP	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NH	-	AP6233A-31ULNPP	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3NH	-	S-19100N19A-M5T2U	Vdet-IC	1.9V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NH	eb	AP6233A-31ULNGA	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NH	eb	AP6233A-31ULNPA	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3NH	ec	AP6233A-31ULNGA1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NH	ec	AP6233A-31ULNPA1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3NH	eh	AP6233A-31ULNGP1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NH	eh	AP6233A-31ULNPP1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3NI	-	S-19100N20A-M5T2U	Vdet-IC	2.0V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NJ	-	AP6233A-31DHFGP	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NJ	-	AP6233A-31DHFPP	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3NJ	-	S-19100N21A-M5T2U	Vdet-IC	2.1V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NJ	eb	AP6233A-31DHFGA	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NJ	eb	AP6233A-31DHFPA	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3NJ	ec	AP6233A-31DHFGA1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NJ	ec	AP6233A-31DHFPA1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3NJ	eh	AP6233A-31DHFGP1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NJ	eh	AP6233A-31DHFPP1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3NK	-	AP6233A-31DLFGP	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NK	-	AP6233A-31DLFPP	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3NK	-	S-19100N22A-M5T2U	Vdet-IC	2.2V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NK	eb	AP6233A-31DLFGA	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NK	eb	AP6233A-31DLFPA	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3NK	ec	AP6233A-31DLFGA1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NK	ec	AP6233A-31DLFPA1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3NK	eh	AP6233A-31DLFGP1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NK	eh	AP6233A-31DLFPP1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3NL	-	AP6233A-31DHNGP	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NL	-	AP6233A-31DHNPP	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3NL	-	S-19100N23A-M5T2U	Vdet-IC	2.3V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NL	eb	AP6233A-31DHNGA	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NL	eb	AP6233A-31DHNPA	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3NL	ec	AP6233A-31DHNGA1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NL	ec	AP6233A-31DHNPA1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3NL	eh	AP6233A-31DHNGP1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NL	eh	AP6233A-31DHNPP1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3NM	-	AP6233A-31DLNGP	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NM	-	AP6233A-31DLNPP	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3NM	-	S-19100N24A-M5T2U	Vdet-IC	2.4V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NM	eb	AP6233A-31DLNGA	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NM	eb	AP6233A-31DLNPA	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3NM	ec	AP6233A-31DLNGA1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3NM	ec	AP6233A-31DLNPA1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3NM	eh	AP6233A-31DLNGP1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3NM	eh	AP6233A-31DLNPP1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3NN	-	S-19100N25A-M5T2U	Vdet-IC	2.5V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NO	-	S-19100N26A-M5T2U	Vdet-IC	2.6V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NP	-	S-19100N27A-M5T2U	Vdet-IC	2.7V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NQ	-	S-19100N28A-M5T2U	Vdet-IC	2.8V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NR	-	S-19100N29A-M5T2U	Vdet-IC	2.9V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NS	-	S-19100N30A-M5T2U	Vdet-IC	3.0V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NT	-	S-19100N31A-M5T2U	Vdet-IC	3.1V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NU	-	S-19100N32A-M5T2U	Vdet-IC	3.2V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NV	-	S-19100N33A-M5T2U	Vdet-IC	3.3V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NW	-	S-19100N34A-M5T2U	Vdet-IC	3.4V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NX	-	S-19100N35A-M5T2U	Vdet-IC	3.5V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NY	-	S-19100N36A-M5T2U	Vdet-IC	3.6V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3NZ	-	S-19100N37A-M5T2U	Vdet-IC	3.7V±3%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3O1	-	S-19100C38H-M5T2U	Vdet-IC	3.8V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3O2	-	S-19100C39H-M5T2U	Vdet-IC	3.9V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3O3	-	S-19100C40H-M5T2U	Vdet-IC	4.0V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3O4	-	S-19100C41H-M5T2U	Vdet-IC	4.1V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3O5	-	S-19100C42H-M5T2U	Vdet-IC	4.2V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3O6	-	S-19100C43H-M5T2U	Vdet-IC	4.3V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3O7	-	S-19100C44H-M5T2U	Vdet-IC	4.4V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3O8	-	S-19100C45H-M5T2U	Vdet-IC	4.5V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3O9	-	S-19100C46H-M5T2U	Vdet-IC	4.6V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OA	-	S-19100C12H-M5T2U	Vdet-IC	1.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OB	-	S-19100C13H-M5T2U	Vdet-IC	1.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OC	-	S-19100C14H-M5T2U	Vdet-IC	1.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OD	-	S-19100C15H-M5T2U	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3OE	-	S-19100C16H-M5T2U	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OF	-	S-19100C17H-M5T2U	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OG	-	S-19100C18H-M5T2U	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OH	-	S-19100C19H-M5T2U	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OI	-	S-19100C20H-M5T2U	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OJ	-	S-19100C21H-M5T2U	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OK	-	S-19100C22H-M5T2U	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OL	-	S-19100C23H-M5T2U	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OM	-	S-19100C24H-M5T2U	Vdet-IC	2.4V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3ON	-	S-19100C25H-M5T2U	Vdet-IC	2.5V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OO	-	S-19100C26H-M5T2U	Vdet-IC	2.6V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OP	-	S-19100C27H-M5T2U	Vdet-IC	2.7V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OQ	-	S-19100C28H-M5T2U	Vdet-IC	2.8V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OR	-	S-19100C29H-M5T2U	Vdet-IC	2.9V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OS	-	S-19100C30H-M5T2U	Vdet-IC	3.0V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OT	-	S-19100C31H-M5T2U	Vdet-IC	3.1V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OU	-	S-19100C32H-M5T2U	Vdet-IC	3.2V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OV	-	S-19100C33H-M5T2U	Vdet-IC	3.3V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OW	-	S-19100C34H-M5T2U	Vdet-IC	3.4V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OX	-	S-19100C35H-M5T2U	Vdet-IC	3.5V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OY	-	S-19100C36H-M5T2U	Vdet-IC	3.6V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3OZ	-	S-19100C37H-M5T2U	Vdet-IC	3.7V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
3P0	ej	XC6104E431MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3P1	-	S-19100N38H-M5T2U	Vdet-IC	3.8V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3P1	ej	XC6104E432MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3P2	-	S-19100N39H-M5T2U	Vdet-IC	3.9V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3P2	ej	XC6104E433MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3P3	-	S-19100N40H-M5T2U	Vdet-IC	4.0V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3P3	ej	XC6104E434MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3P4	-	S-19100N41H-M5T2U	Vdet-IC	4.1V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3P4	ej	XC6104E435MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3P5	-	S-19100N42H-M5T2U	Vdet-IC	4.2V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3P5	ej	XC6104E436MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3P6	-	S-19100N43H-M5T2U	Vdet-IC	4.3V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3P6	ej	XC6104E437MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3P7	-	S-19100N44H-M5T2U	Vdet-IC	4.4V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3P7	ej	XC6104E438MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3P8	-	S-19100N45H-M5T2U	Vdet-IC	4.5V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3P8	ej	XC6104E439MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3P9	-	S-19100N46H-M5T2U	Vdet-IC	4.6V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3P9	ej	XC6104E440MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PA	-	S-19100N12H-M5T2U	Vdet-IC	1.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PA	ej	XC6104E441MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PB	-	S-19100N13H-M5T2U	Vdet-IC	1.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PB	ej	XC6104E442MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PC	-	S-19100N14H-M5T2U	Vdet-IC	1.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PC	ej	XC6104E443MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PD	-	S-19100N15H-M5T2U	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PD	ej	XC6104E444MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PE	-	S-19100N16H-M5T2U	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PE	ej	XC6104E445MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PF	-	S-19100N17H-M5T2U	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PF	ec	XC6104E416MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PF	ej	XC6104E446MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PG	-	S-19100N18H-M5T2U	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PH	-	S-19100N19H-M5T2U	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PH	ec	XC6104E417MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PH	ej	XC6104E447MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PI	-	S-19100N20H-M5T2U	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PJ	-	S-19100N21H-M5T2U	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PK	-	S-19100N22H-M5T2U	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PK	ec	XC6104E418MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PK	ej	XC6104E448MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PL	-	S-19100N23H-M5T2U	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PL	ec	XC6104E419MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PL	ej	XC6104E449MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PM	-	S-19100N24H-M5T2U	Vdet-IC	2.4V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PM	ec	XC6104E420MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PM	ej	XC6104E450MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PN	-	S-19100N25H-M5T2U	Vdet-IC	2.5V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3PN	ec	XC6104E421MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PO	-	S-19100N26H-M5T2U	Vdet-IC	2.6V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PP	-	S-19100N27H-M5T2U	Vdet-IC	2.7V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PP	ec	XC6104E422MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PQ	-	S-19100N28H-M5T2U	Vdet-IC	2.8V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PR	-	S-19100N29H-M5T2U	Vdet-IC	2.9V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PR	ec	XC6104E423MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PS	-	S-19100N30H-M5T2U	Vdet-IC	3.0V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PS	ec	XC6104E424MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PT	-	S-19100N31H-M5T2U	Vdet-IC	3.1V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PT	ec	XC6104E425MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PU	-	S-19100N32H-M5T2U	Vdet-IC	3.2V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PU	ec	XC6104E426MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PV	-	S-19100N33H-M5T2U	Vdet-IC	3.3V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PV	ec	XC6104E427MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PW	-	S-19100N34H-M5T2U	Vdet-IC	3.4V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PX	-	S-19100N35H-M5T2U	Vdet-IC	3.5V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PX	ec	XC6104E428MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PY	-	S-19100N36H-M5T2U	Vdet-IC	3.6V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PY	ec	XC6104E429MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3PZ	-	S-19100N37H-M5T2U	Vdet-IC	3.7V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
3PZ	ec	XC6104E430MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3Q	-	R1210N231A	DC-DC-IC	PWM step-up, 2.3V, 35..100kHz	SOT-23-5	28sc	DC3	6g	Ric
3QA	-	AP6233A-33NHFGP	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QA	-	AP6233A-33NHFPP	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3QA	eb	AP6233A-33NHFGA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QA	eb	AP6233A-33NHFPA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3QA	ec	AP6233A-33NHFGA1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QA	ec	AP6233A-33NHFPA1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3QA	eh	AP6233A-33NHFGP1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QA	eh	AP6233A-33NHFPP1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3QB	-	AP6233A-33NLFGP	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QB	-	AP6233A-33NLFPP	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3QB	eb	AP6233A-33NLFGA	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QB	eb	AP6233A-33NLFPA	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3QB	ec	AP6233A-33NLFGA1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QB	ec	AP6233A-33NLFPA1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3QB	eh	AP6233A-33NLFGP1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QB	eh	AP6233A-33NLFPP1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3QC	-	AP6233A-33NHNGP	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QC	-	AP6233A-33NHNPP	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
3QC	eb	AP6233A-33NHNGA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QC	eb	AP6233A-33NHNPA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
3QC	ec	AP6233A-33NHNGA1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QC	ec	AP6233A-33NHNPA1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
3QC	eh	AP6233A-33NHNGP1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QC	eh	AP6233A-33NHNPP1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
3QD	-	AP6233A-33NLNGP	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QD	-	AP6233A-33NLNPP	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
3QD	eb	AP6233A-33NLNGA	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QD	eb	AP6233A-33NLNPA	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
3QD	ec	AP6233A-33NLNGA1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QD	ec	AP6233A-33NLNPA1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
3QD	eh	AP6233A-33NLNGP1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QD	eh	AP6233A-33NLNPP1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
3QE	-	AP6233A-33UHFGP	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QE	-	AP6233A-33UHFPP	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3QE	eb	AP6233A-33UHFGA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QE	eb	AP6233A-33UHFPA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3QE	ec	AP6233A-33UHFGA1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QE	ec	AP6233A-33UHFPA1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3QE	eh	AP6233A-33UHFGP1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QE	eh	AP6233A-33UHFPP1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3QF	-	AP6233A-33ULFGP	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QF	-	AP6233A-33ULFPP	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3QF	eb	AP6233A-33ULFGA	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QF	eb	AP6233A-33ULFPA	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3QF	ec	AP6233A-33ULFGA1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QF	ec	AP6233A-33ULFPA1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3QF	eh	AP6233A-33ULFGP1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3QF	eh	AP6233A-33ULFPP1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3QG	-	AP6233A-33UHNGP	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QG	-	AP6233A-33UHNPP	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3QG	eb	AP6233A-33UHNGA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QG	eb	AP6233A-33UHNPA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3QG	ec	AP6233A-33UHNGA1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QG	ec	AP6233A-33UHNPA1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3QG	eh	AP6233A-33UHNGP1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QG	eh	AP6233A-33UHNPP1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3QH	-	AP6233A-33ULNGP	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QH	-	AP6233A-33ULNPP	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3QH	eb	AP6233A-33ULNGA	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QH	eb	AP6233A-33ULNPA	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3QH	ec	AP6233A-33ULNGA1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QH	ec	AP6233A-33ULNPA1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3QH	eh	AP6233A-33ULNGP1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QH	eh	AP6233A-33ULNPP1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3QJ	-	AP6233A-33DHFGP	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QJ	-	AP6233A-33DHFPP	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3QJ	eb	AP6233A-33DHFGA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QJ	eb	AP6233A-33DHFPA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3QJ	ec	AP6233A-33DHFGA1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QJ	ec	AP6233A-33DHFPA1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3QJ	eh	AP6233A-33DHFGP1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QJ	eh	AP6233A-33DHFPP1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3QK	-	AP6233A-33DLFGP	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QK	-	AP6233A-33DLFPP	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3QK	eb	AP6233A-33DLFGA	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QK	eb	AP6233A-33DLFPA	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3QK	ec	AP6233A-33DLFGA1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QK	ec	AP6233A-33DLFPA1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3QK	eh	AP6233A-33DLFGP1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QK	eh	AP6233A-33DLFPP1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3QL	-	AP6233A-33DHNGP	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QL	-	AP6233A-33DHNPP	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3QL	eb	AP6233A-33DHNGA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QL	eb	AP6233A-33DHNPA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3QL	ec	AP6233A-33DHNGA1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QL	ec	AP6233A-33DHNPA1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3QL	eh	AP6233A-33DHNGP1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QL	eh	AP6233A-33DHNPP1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3QM	-	AP6233A-33DLNGP	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QM	-	AP6233A-33DLNPP	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3QM	eb	AP6233A-33DLNGA	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QM	eb	AP6233A-33DLNPA	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3QM	ec	AP6233A-33DLNGA1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3QM	ec	AP6233A-33DLNPA1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3QM	eh	AP6233A-33DLNGP1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3QM	eh	AP6233A-33DLNPP1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3R	-	R1210N331A	DC-DC-IC	PWM step-up, 3.3V, 35..100kHz	SOT-23-5	28sc	DC3	6g	Ric
3R0	ej	XC6104E531MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3R1	ej	XC6104E532MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3R2	ej	XC6104E533MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3R3	ej	XC6104E534MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3R4	ej	XC6104E535MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3R5	ej	XC6104E536MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3R6	ej	XC6104E537MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3R7	ej	XC6104E538MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3R8	ej	XC6104E539MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3R9	ej	XC6104E540MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RA	ej	XC6104E541MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RB	ej	XC6104E542MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RC	ej	XC6104E543MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RD	ej	XC6104E544MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RE	ej	XC6104E545MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RF	ec	XC6104E516MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RF	ej	XC6104E546MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RH	ec	XC6104E517MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RH	ej	XC6104E547MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RK	ec	XC6104E518MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3RK	ej	XC6104E548MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RL	ec	XC6104E519MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RL	ej	XC6104E549MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RM	ec	XC6104E520MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RM	ej	XC6104E550MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RN	ec	XC6104E521MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RP	ec	XC6104E522MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RR	ec	XC6104E523MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RS	ec	XC6104E524MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RT	ec	XC6104E525MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RU	ec	XC6104E526MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RV	ec	XC6104E527MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RX	ec	XC6104E528MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RY	ec	XC6104E529MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3RZ	ec	XC6104E530MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3S	-	RN5RF13AA	LVR-IC	LRip, -CE, 1.3V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
3S0	ej	XC6104E631MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3S1	ej	XC6104E632MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3S2	ej	XC6104E633MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3S3	ej	XC6104E634MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3S4	ej	XC6104E635MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3S5	ej	XC6104E636MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3S6	ej	XC6104E637MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3S7	ej	XC6104E638MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3S8	ej	XC6104E639MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3S9	ej	XC6104E640MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SA	ej	XC6104E641MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SB	ej	XC6104E642MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SC	ej	XC6104E643MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SD	ej	XC6104E644MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SE	ej	XC6104E645MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SF	ec	XC6104E616MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SF	ej	XC6104E646MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SH	ec	XC6104E617MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SH	ej	XC6104E647MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SK	ec	XC6104E618MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SK	ej	XC6104E648MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SL	ec	XC6104E619MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SL	ej	XC6104E649MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SM	ec	XC6104E620MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SM	ej	XC6104E650MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SN	ec	XC6104E621MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SP	ec	XC6104E622MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SR	ec	XC6104E623MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SS	ec	XC6104E624MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3ST	ec	XC6104E625MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SU	ec	XC6104E626MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SV	ec	XC6104E627MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SX	ec	XC6104E628MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SY	ec	XC6104E629MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3SZ	ec	XC6104E630MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
3T0	ej	XC6104F531MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3T1	ej	XC6104F532MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3T2	ej	XC6104F533MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3T3	ej	XC6104F534MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3T4	ej	XC6104F535MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3T5	ej	XC6104F536MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3T6	ej	XC6104F537MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3T7	ej	XC6104F538MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3T8	ej	XC6104F539MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3T9	ej	XC6104F540MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TA	ej	XC6104F541MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TB	ej	XC6104F542MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TC	ej	XC6104F543MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TD	ej	XC6104F544MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TE	ej	XC6104F545MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TF	ec	XC6104F516MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TF	ej	XC6104F546MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TH	ec	XC6104F517MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TH	ej	XC6104F547MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3TK	ec	XC6104F518MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TK	ej	XC6104F548MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TL	ec	XC6104F519MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TL	ej	XC6104F549MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TM	ec	XC6104F520MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TM	ej	XC6104F550MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TN	ec	XC6104F521MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TP	ec	XC6104F522MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TR	ec	XC6104F523MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TS	ec	XC6104F524MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TT	ec	XC6104F525MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TU	ec	XC6104F526MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TV	ec	XC6104F527MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TX	ec	XC6104F528MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TY	ec	XC6104F529MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3TZ	ec	XC6104F530MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3U	-	R1210N231C	DC-DC-IC	PWM step-up, 2.3V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
3U0	ej	XC6104F631MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3U1	ej	XC6104F632MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3U2	ej	XC6104F633MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3U3	ej	XC6104F634MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3U4	ej	XC6104F635MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3U5	ej	XC6104F636MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3U6	ej	XC6104F637MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3U7	ej	XC6104F638MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3U8	ej	XC6104F639MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3U9	ej	XC6104F640MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UA	ej	XC6104F641MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UB	ej	XC6104F642MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UC	ej	XC6104F643MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UD	ej	XC6104F644MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UE	ej	XC6104F645MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UF	ec	XC6104F616MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UF	ej	XC6104F646MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UH	ec	XC6104F617MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UH	ej	XC6104F647MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UK	ec	XC6104F618MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UK	ej	XC6104F648MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UL	ec	XC6104F619MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UL	ej	XC6104F649MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UM	ec	XC6104F620MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UM	ej	XC6104F650MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UN	ec	XC6104F621MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UP	ec	XC6104F622MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UR	ec	XC6104F623MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3US	ec	XC6104F624MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UT	ec	XC6104F625MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UU	ec	XC6104F626MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UV	ec	XC6104F627MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UX	ec	XC6104F628MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UY	ec	XC6104F629MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3UZ	ec	XC6104F630MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
3V0	-	TAR5S30	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
3V0	-	TAR5S30U	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
3V0	ej	XC6104H631MR	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3V1	-	TAR5S31	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
3V1	-	TAR5S31U	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
3V1	ej	XC6104H632MR	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3V2	-	TAR5S32	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
3V2	-	TAR5S32U	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
3V2	ej	XC6104H633MR	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3V3	-	TAR5S33	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
3V3	-	TAR5S33U	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
3V3	ej	XC6104H634MR	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3V4	-	TAR5S34	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
3V4	-	TAR5S34U	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
3V4	ej	XC6104H635MR	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3V5	-	TAR5S35	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
3V5	-	TAR5S35U	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
3V5	ej	XC6104H636MR	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3V6	-	TAR5S36	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
3V6	-	TAR5S36U	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
3V6	ej	XC6104H637MR	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3V7	-	TAR5S37	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
3V7	-	TAR5S37U	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
3V7	-	XC6221A081MR	LVR-IC	LDO, 0.8V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3V7	ej	XC6104H638MR	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3V8	-	TAR5S38	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
3V8	-	TAR5S38U	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
3V8	-	XC6221A091MR	LVR-IC	LDO, 0.9V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3V8	ej	XC6104H639MR	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3V9	-	TAR5S39	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
3V9	-	TAR5S39U	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
3V9	-	XC6221A101MR	LVR-IC	LDO, 1.0V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3V9	ej	XC6104H640MR	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VA	-	AP6233A-36NHFGP	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VA	-	AP6233A-36NHFPP	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3VA	-	XC6221A111MR	LVR-IC	LDO, 1.1V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VA	eb	AP6233A-36NHFGA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VA	eb	AP6233A-36NHFPA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3VA	ec	AP6233A-36NHFGA1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VA	ec	AP6233A-36NHFPA1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3VA	eh	AP6233A-36NHFGP1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VA	eh	AP6233A-36NHFPP1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3VA	ej	XC6104H641MR	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VB	-	AP6233A-36NLFGP	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VB	-	AP6233A-36NLFPP	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3VB	-	XC6221A121MR	LVR-IC	LDO, 1.2V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VB	eb	AP6233A-36NLFGA	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VB	eb	AP6233A-36NLFPA	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3VB	ec	AP6233A-36NLFGA1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VB	ec	AP6233A-36NLFPA1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3VB	eh	AP6233A-36NLFGP1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VB	eh	AP6233A-36NLFPP1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3VB	ej	XC6104H642MR	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VC	-	AP6233A-36NHNGP	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VC	-	AP6233A-36NHNPP	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
3VC	-	XC6221A131MR	LVR-IC	LDO, 1.3V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VC	eb	AP6233A-36NHNGA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VC	eb	AP6233A-36NHNPA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
3VC	ec	AP6233A-36NHNGA1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VC	ec	AP6233A-36NHNPA1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
3VC	eh	AP6233A-36NHNGP1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VC	eh	AP6233A-36NHNPP1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
3VC	ej	XC6104H643MR	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VD	-	AP6233A-36NLNGP	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VD	-	AP6233A-36NLNPP	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
3VD	-	XC6221A141MR	LVR-IC	LDO, 1.4V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VD	eb	AP6233A-36NLNGA	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VD	eb	AP6233A-36NLNPA	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
3VD	ec	AP6233A-36NLNGA1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VD	ec	AP6233A-36NLNPA1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
3VD	eh	AP6233A-36NLNGP1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VD	eh	AP6233A-36NLNPP1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
3VD	ej	XC6104H644MR	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VE	-	AP6233A-36UHFGP	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VE	-	AP6233A-36UHFPP	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3VE	-	XC6221A151MR	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VE	eb	AP6233A-36UHFGA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VE	eb	AP6233A-36UHFPA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3VE	ec	AP6233A-36UHFGA1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VE	ec	AP6233A-36UHFPA1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3VE	eh	AP6233A-36UHFGP1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VE	eh	AP6233A-36UHFPP1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3VE	ej	XC6104H645MR	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VF	-	AP6233A-36ULFGP	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VF	-	AP6233A-36ULFPP	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3VF	-	XC6221A161MR	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VF	eb	AP6233A-36ULFGA	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VF	eb	AP6233A-36ULFPA	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3VF	ec	AP6233A-36ULFGA1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VF	ec	AP6233A-36ULFPA1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3VF	ec	XC6104H616MR	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VF	eh	AP6233A-36ULFGP1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VF	eh	AP6233A-36ULFPP1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3VF	ej	XC6104H646MR	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VG	-	AP6233A-36UHNGP	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VG	-	AP6233A-36UHNPP	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3VG	eb	AP6233A-36UHNGA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VG	eb	AP6233A-36UHNPA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3VG	ec	AP6233A-36UHNGA1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VG	ec	AP6233A-36UHNPA1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3VG	eh	AP6233A-36UHNGP1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VG	eh	AP6233A-36UHNPP1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3VH	-	AP6233A-36ULNGP	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VH	-	AP6233A-36ULNPP	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3VH	-	XC6221A171MR	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VH	eb	AP6233A-36ULNGA	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VH	eb	AP6233A-36ULNPA	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3VH	ec	AP6233A-36ULNGA1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VH	ec	AP6233A-36ULNPA1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3VH	ec	XC6104H617MR	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VH	eh	AP6233A-36ULNGP1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VH	eh	AP6233A-36ULNPP1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3VH	ej	XC6104H647MR	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VJ	-	AP6233A-36DHFGP	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VJ	-	AP6233A-36DHFPP	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3VJ	eb	AP6233A-36DHFGA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VJ	eb	AP6233A-36DHFPA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3VJ	ec	AP6233A-36DHFGA1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VJ	ec	AP6233A-36DHFPA1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3VJ	eh	AP6233A-36DHFGP1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VJ	eh	AP6233A-36DHFPP1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3VK	-	AP6233A-36DLFGP	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VK	-	AP6233A-36DLFPP	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3VK	-	XC6221A181MR	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VK	eb	AP6233A-36DLFGA	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VK	eb	AP6233A-36DLFPA	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3VK	ec	AP6233A-36DLFGA1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VK	ec	AP6233A-36DLFPA1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3VK	ec	XC6104H618MR	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VK	eh	AP6233A-36DLFGP1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VK	eh	AP6233A-36DLFPP1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3VK	ej	XC6104H648MR	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VL	-	AP6233A-36DHNGP	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VL	-	AP6233A-36DHNPP	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3VL	-	XC6221A191MR	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VL	eb	AP6233A-36DHNGA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VL	eb	AP6233A-36DHNPA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3VL	ec	AP6233A-36DHNGA1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VL	ec	AP6233A-36DHNPA1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3VL	ec	XC6104H619MR	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VL	eh	AP6233A-36DHNGP1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VL	eh	AP6233A-36DHNPP1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3VL	ej	XC6104H649MR	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VM	-	AP6233A-36DLNGP	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VM	-	AP6233A-36DLNPP	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3VM	-	XC6221A201MR	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VM	eb	AP6233A-36DLNGA	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VM	eb	AP6233A-36DLNPA	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3VM	ec	AP6233A-36DLNGA1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3VM	ec	AP6233A-36DLNPA1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3VM	ec	XC6104H620MR	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VM	eh	AP6233A-36DLNGP1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3VM	eh	AP6233A-36DLNPP1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3VM	ej	XC6104H650MR	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VN	-	XC6221A211MR	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VN	ec	XC6104H621MR	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VP	-	XC6221A221MR	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VP	ec	XC6104H622MR	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3VR	-	XC6221A231MR	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VR	ec	XC6104H623MR	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VS	-	XC6221A241MR	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VS	ec	XC6104H624MR	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VT	-	XC6221A251MR	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VT	ec	XC6104H625MR	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VU	-	XC6221A261MR	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VU	ec	XC6104H626MR	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VV	-	XC6221A271MR	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VV	ec	XC6104H627MR	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VX	-	XC6221A281MR	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VX	ec	XC6104H628MR	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VY	-	XC6221A291MR	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VY	ec	XC6104H629MR	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3VZ	-	XC6221A301MR	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
3VZ	ec	XC6104H630MR	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
3W	-	R1210N331C	DC-DC-IC	PWM step-up, 3.3V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
3X	-	R1210N431C	DC-DC-IC	PWM step-up, 4.2V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
3X0	-	XC6221B311MR	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3X7	-	XC6221B081MR	LVR-IC	LDO, 0.8V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3X8	-	XC6221B091MR	LVR-IC	LDO, 0.9V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3X9	-	XC6221B101MR	LVR-IC	LDO, 1.0V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XA	-	XC6221B111MR	LVR-IC	LDO, 1.1V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XB	-	XC6221B121MR	LVR-IC	LDO, 1.2V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XC	-	XC6221B131MR	LVR-IC	LDO, 1.3V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XD	-	XC6221B141MR	LVR-IC	LDO, 1.4V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XE	-	XC6221B151MR	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XF	-	XC6221B161MR	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XH	-	XC6221B171MR	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XK	-	XC6221B181MR	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XL	-	XC6221B191MR	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XM	-	XC6221B201MR	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XN	-	XC6221B211MR	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XP	-	XC6221B221MR	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XR	-	XC6221B231MR	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XS	-	XC6221B241MR	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XT	-	XC6221B251MR	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XU	-	XC6221B261MR	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XV	-	XC6221B271MR	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XX	-	XC6221B281MR	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XY	-	XC6221B291MR	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3XZ	-	XC6221B301MR	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
3Y	-	R1210N531C	DC-DC-IC	PWM step-up, 5.3V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
3Y0	-	U74LVC1G00-AF5	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6a	Utc
3Y0	-	U74LVC1G00-AL5	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6a	Utc
3Y0L	-	U74LVC1G00L-AF5	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6a	Utc
3Y0L	-	U74LVC1G00L-AL5	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6a	Utc
3Y4	-	U74LVC1G04-AF5	CMOS-Log	Inverter	SOT-23-5	28	Log6	6a	Utc
3Y4	-	U74LVC1G04-AL5	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Utc
3Y4L	-	U74LVC1G04L-AF5	CMOS-Log	Inverter	SOT-23-5	28	Log6	6a	Utc
3Y4L	-	U74LVC1G04L-AL5	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Utc
3Y6	-	U74LVC1G06-AF5	CMOS-Log	Inverter (ODO)	SOT-23-5	28	Log19	6a	Utc
3Y6	-	U74LVC1G06-AL5	CMOS-Log	Inverter (ODO)	SOT-353	28	Log19	6a	Utc
3Y6L	-	U74LVC1G06L-AF5	CMOS-Log	Inverter (ODO)	SOT-23-5	28	Log19	6a	Utc
3Y6L	-	U74LVC1G06L-AL5	CMOS-Log	Inverter (ODO)	SOT-353	28	Log19	6a	Utc
3Y7	-	U74LVC1G07-AF5	CMOS-Log	Noninverting buffer/driver (ODO)	SOT-23-5	28	Log8	6a	Utc
3Y7	-	U74LVC1G07-AL5	CMOS-Log	Noninverting buffer/driver (ODO)	SOT-353	28	Log8	6a	Utc
3Y7L	-	U74LVC1G07L-AF5	CMOS-Log	Noninverting buffer/driver (ODO)	SOT-23-5	28	Log8	6a	Utc
3Y7L	-	U74LVC1G07L-AL5	CMOS-Log	Noninverting buffer/driver (ODO)	SOT-353	28	Log8	6a	Utc
3Y8	-	U74LVC1G08-AF5	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6a	Utc
3Y8	-	U74LVC1G08-AL5	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Utc
3Y8L	-	U74LVC1G08L-AF5	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6a	Utc
3Y8L	-	U74LVC1G08L-AL5	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Utc
3Z	-	R1210N231D	DC-DC-IC	PWM step-up, 2.3V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
3ZA	-	AP6233A-50NHFGP	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZA	-	AP6233A-50NHFPP	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3ZA	eb	AP6233A-50NHFGA	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZA	eb	AP6233A-50NHFPA	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3ZA	ec	AP6233A-50NHFGA1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZA	ec	AP6233A-50NHFPA1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3ZA	eh	AP6233A-50NHFGP1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZA	eh	AP6233A-50NHFPP1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3ZB	-	AP6233A-50NLFGP	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZB	-	AP6233A-50NLFPP	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3ZB	eb	AP6233A-50NLFGA	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZB	eb	AP6233A-50NLFPA	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3ZB	ec	AP6233A-50NLFGA1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZB	ec	AP6233A-50NLFPA1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge	SOT-25	28cx	VR4	6kb	Anw
3ZB	eh	AP6233A-50NLFGP1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZB	eh	AP6233A-50NLFPP1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge	SC-70-5	28cx	VR4	6kb	Anw
3ZC	-	AP6233A-50NHNGP	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZC	-	AP6233A-50NHNPP	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
3ZC	eb	AP6233A-50NHNGA	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZC	eb	AP6233A-50NHNPA	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
3ZC	ec	AP6233A-50NHNGA1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZC	ec	AP6233A-50NHNPA1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE	SOT-25	28cx	VR4	6kb	Anw
3ZC	eh	AP6233A-50NHNGP1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZC	eh	AP6233A-50NHNPP1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6kb	Anw
3ZD	-	AP6233A-50NLNGP	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZD	-	AP6233A-50NLNPP	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
3ZD	eb	AP6233A-50NLNGA	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZD	eb	AP6233A-50NLNPA	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
3ZD	ec	AP6233A-50NLNGA1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZD	ec	AP6233A-50NLNPA1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE	SOT-25	28cx	VR4	6kb	Anw
3ZD	eh	AP6233A-50NLNGP1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZD	eh	AP6233A-50NLNPP1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE	SC-70-5	28cx	VR4	6kb	Anw
3ZE	-	AP6233A-50UHFGP	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZE	-	AP6233A-50UHFPP	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3ZE	eb	AP6233A-50UHFGA	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZE	eb	AP6233A-50UHFPA	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3ZE	ec	AP6233A-50UHFGA1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZE	ec	AP6233A-50UHFPA1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3ZE	eh	AP6233A-50UHFGP1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZE	eh	AP6233A-50UHFPP1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3ZF	-	AP6233A-50ULFGP	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZF	-	AP6233A-50ULFPP	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3ZF	eb	AP6233A-50ULFGA	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZF	eb	AP6233A-50ULFPA	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3ZF	ec	AP6233A-50ULFGA1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZF	ec	AP6233A-50ULFPA1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge, PUR	SOT-25	28cx	VR4	6kb	Anw
3ZF	eh	AP6233A-50ULFGP1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZF	eh	AP6233A-50ULFPP1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge, PUR	SC-70-5	28cx	VR4	6kb	Anw
3ZG	-	AP6233A-50UHNGP	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZG	-	AP6233A-50UHNPP	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3ZG	eb	AP6233A-50UHNGA	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZG	eb	AP6233A-50UHNPA	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3ZG	ec	AP6233A-50UHNGA1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZG	ec	AP6233A-50UHNPA1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3ZG	eh	AP6233A-50UHNGP1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZG	eh	AP6233A-50UHNPP1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3ZH	-	AP6233A-50ULNGP	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZH	-	AP6233A-50ULNPP	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3ZH	eb	AP6233A-50ULNGA	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZH	eb	AP6233A-50ULNPA	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3ZH	ec	AP6233A-50ULNGA1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZH	ec	AP6233A-50ULNPA1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
3ZH	eh	AP6233A-50ULNGP1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZH	eh	AP6233A-50ULNPP1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
3ZJ	-	AP6233A-50DHFGP	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZJ	-	AP6233A-50DHFPP	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3ZJ	eb	AP6233A-50DHFGA	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZJ	eb	AP6233A-50DHFPA	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3ZJ	ec	AP6233A-50DHFGA1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZJ	ec	AP6233A-50DHFPA1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3ZJ	eh	AP6233A-50DHFGP1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZJ	eh	AP6233A-50DHFPP1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3ZK	-	AP6233A-50DLFGP	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZK	-	AP6233A-50DLFPP	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3ZK	eb	AP6233A-50DLFGA	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZK	eb	AP6233A-50DLFPA	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3ZK	ec	AP6233A-50DLFGA1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZK	ec	AP6233A-50DLFPA1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge, PDR	SOT-25	28cx	VR4	6kb	Anw
3ZK	eh	AP6233A-50DLFGP1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZK	eh	AP6233A-50DLFPP1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge, PDR	SC-70-5	28cx	VR4	6kb	Anw
3ZL	-	AP6233A-50DHNGP	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZL	-	AP6233A-50DHNPP	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3ZL	eb	AP6233A-50DHNGA	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZL	eb	AP6233A-50DHNPA	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3ZL	ec	AP6233A-50DHNGA1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZL	ec	AP6233A-50DHNPA1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3ZL	eh	AP6233A-50DHNGP1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZL	eh	AP6233A-50DHNPP1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3ZM	-	AP6233A-50DLNGP	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZM	-	AP6233A-50DLNPP	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
3ZM	eb	AP6233A-50DLNGA	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZM	eb	AP6233A-50DLNPA	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3ZM	ec	AP6233A-50DLNGA1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
3ZM	ec	AP6233A-50DLNPA1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
3ZM	eh	AP6233A-50DLNGP1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
3ZM	eh	AP6233A-50DLNPP1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
40	-	R1223N332G	DC-DC-IC	PWM step-down, +CE, 3.3V±2%, 300kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
40	-	RN5RF40AA	LVR-IC	LRip, -CE, 4V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
40	-	RN5RZ40AA	LVR-IC	LDO, LN, 4V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
40	-	XC62EP4002MR-G	LVR-IC	LDO, boosted, 4.0V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
40	ea	XC62ER4002MR-G	LVR-IC	LDO, boosted, 4.0V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
40-	-	XC62HR4002MR-G	LVR-IC	LDO, 4.0V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
400	ej	XC6105A131MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
400AC	-	BL8509-400ACRN	Vdet-IC	4.0V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
400AC	-	LC9009CB5TR400AC	Vdet-IC	4.0V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
400AN	-	BL8509-400ANRN	Vdet-IC	4.0V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
400AN	-	LC9009CB5TR400AN	Vdet-IC	4.0V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
400BC	-	BL8509-400BCRN	Vdet-IC	4.0V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
400BC	-	LC9009CB5TR400BC	Vdet-IC	4.0V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
400BN	-	BL8509-400BNRN	Vdet-IC	4.0V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
400BN	-	LC9009CB5TR400BN	Vdet-IC	4.0V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
400CC	-	BL8509-400CCRN	Vdet-IC	4.0V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
400CC	-	LC9009CB5TR400CC	Vdet-IC	4.0V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
400CN	-	BL8509-400CNRN	Vdet-IC	4.0V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
400CN	-	LC9009CB5TR400CN	Vdet-IC	4.0V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
400DC	-	BL8509-400DCRN	Vdet-IC	4.0V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
400DC	-	LC9009CB5TR400DC	Vdet-IC	4.0V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
400DN	-	BL8509-400DNRN	Vdet-IC	4.0V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
400DN	-	LC9009CB5TR400DN	Vdet-IC	4.0V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
400EC	-	BL8509-400ECRN	Vdet-IC	4.0V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
400EC	-	LC9009CB5TR400EC	Vdet-IC	4.0V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
400EN	-	BL8509-400ENRN	Vdet-IC	4.0V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
400EN	-	LC9009CB5TR400EN	Vdet-IC	4.0V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
400FC	-	BL8509-400FCRN	Vdet-IC	4.0V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
400FC	-	LC9009CB5TR400FC	Vdet-IC	4.0V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
400FN	-	BL8509-400FNRN	Vdet-IC	4.0V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
400FN	-	LC9009CB5TR400FN	Vdet-IC	4.0V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
400GC	-	BL8509-400GCRN	Vdet-IC	4.0V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
400GC	-	LC9009CB5TR400GC	Vdet-IC	4.0V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
400GN	-	BL8509-400GNRN	Vdet-IC	4.0V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
400GN	-	LC9009CB5TR400GN	Vdet-IC	4.0V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
401	eb	XC6404AA01M	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
401	ej	XC6105A132MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
402	eb	XC6404AA02M	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
402	ej	XC6105A133MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
403	eb	XC6404AA03M	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
403	ej	XC6105A134MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
404	eb	XC6404AA04M	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
404	ej	XC6105A135MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
405	eb	XC6404AA05M	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
405	ej	XC6105A136MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
406	ej	XC6105A137MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
407	eb	XC6404AA07M	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
407	ej	XC6105A138MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
408	eb	XC6404AA08M	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
408	ej	XC6105A139MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
409	eb	XC6404AA09M	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
409	ej	XC6105A140MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40A	-	AAT60040A-S5	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
40A	ej	XC6105A141MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40-A	-	UTC8140-A	Vdet-IC	4.0V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
40B	-	AAT60040B-S5	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
40B	ej	XC6105A142MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40-B	-	UTC8140-B	Vdet-IC	4.0V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
40C	-	AAT60040C-S5	Vdet-IC	4.0V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
40C	ej	XC6105A143MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40D	-	AAT60040D-S5	Vdet-IC	4.0V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
40D	ej	XC6105A144MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40E	ej	XC6105A145MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40F	ec	XC6105A116MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40F	ej	XC6105A146MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40H	ec	XC6105A117MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40H	ej	XC6105A147MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40K	-	TK71740S	LVR-IC	LDO, 4.0V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
40K	ec	XC6105A118MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40K	ej	XC6105A148MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40L	-	TK71640ASCL	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
40L	ec	XC6105A119MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40L	ej	XC6105A149MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40M	ec	XC6105A120MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40M	ej	XC6105A150MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40N	-	XC9140A181MR-G	DC-DC-IC	PWM step-up, 1.8V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
40N	ec	XC6105A121MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40P	-	XC9140A351MR-G	DC-DC-IC	PWM step-up, 3.5V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
40P	ec	XC6105A122MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40R	ec	XC6105A123MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40S	ec	XC6105A124MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40T	-	TK71440S	LVR-IC	LDO, 4.0V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
40T	-	XC9140C181MR-G	DC-DC-IC	PWM step-up, 1.8V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
40T	ec	XC6105A125MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40U	-	TK61040S	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Tok
40U	-	XC9140C351MR-G	DC-DC-IC	PWM step-up, 3.5V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
40U	ec	XC6105A126MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40V	ec	XC6105A127MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40X	ec	XC6105A128MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40Y	ec	XC6105A129MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
40Z	ec	XC6105A130MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41	-	R1223N502G	DC-DC-IC	PWM step-down, +CE, 5V±2%, 300kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
41	-	RN5RF41AA	LVR-IC	LRip, -CE, 4.1V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
41	-	RN5RZ41AA	LVR-IC	LDO, LN, 4.1V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
41	-	XC62EP4102MR-G	LVR-IC	LDO, boosted, 4.1V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
41	ea	XC62ER4102MR-G	LVR-IC	LDO, boosted, 4.1V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
41-	-	XC62HR4102MR-G	LVR-IC	LDO, 4.1V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
410	eb	XC6404AA10M	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
410	ej	XC6105A231MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
410AC	-	BL8509-410ACRN	Vdet-IC	4.1V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
410AC	-	LC9009CB5TR410AC	Vdet-IC	4.1V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
410AN	-	BL8509-410ANRN	Vdet-IC	4.1V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
410AN	-	LC9009CB5TR410AN	Vdet-IC	4.1V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
410BC	-	BL8509-410BCRN	Vdet-IC	4.1V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
410BC	-	LC9009CB5TR410BC	Vdet-IC	4.1V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
410BN	-	BL8509-410BNRN	Vdet-IC	4.1V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
410BN	-	LC9009CB5TR410BN	Vdet-IC	4.1V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
410CC	-	BL8509-410CCRN	Vdet-IC	4.1V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
410CC	-	LC9009CB5TR410CC	Vdet-IC	4.1V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
410CN	-	BL8509-410CNRN	Vdet-IC	4.1V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
410CN	-	LC9009CB5TR410CN	Vdet-IC	4.1V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
410DC	-	BL8509-410DCRN	Vdet-IC	4.1V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
410DC	-	LC9009CB5TR410DC	Vdet-IC	4.1V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
410DN	-	BL8509-410DNRN	Vdet-IC	4.1V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
410DN	-	LC9009CB5TR410DN	Vdet-IC	4.1V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
410EC	-	BL8509-410ECRN	Vdet-IC	4.1V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
410EC	-	LC9009CB5TR410EC	Vdet-IC	4.1V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
410EN	-	BL8509-410ENRN	Vdet-IC	4.1V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
410EN	-	LC9009CB5TR410EN	Vdet-IC	4.1V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
410FC	-	BL8509-410FCRN	Vdet-IC	4.1V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
410FC	-	LC9009CB5TR410FC	Vdet-IC	4.1V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
410FN	-	BL8509-410FNRN	Vdet-IC	4.1V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
410FN	-	LC9009CB5TR410FN	Vdet-IC	4.1V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
410GC	-	BL8509-410GCRN	Vdet-IC	4.1V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
410GC	-	LC9009CB5TR410GC	Vdet-IC	4.1V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
410GN	-	BL8509-410GNRN	Vdet-IC	4.1V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
410GN	-	LC9009CB5TR410GN	Vdet-IC	4.1V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
411	eb	XC6404AA11M	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
411	ej	XC6105A232MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
412	eb	XC6404AA12M	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
412	ej	XC6105A233MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
413	eb	XC6404AA13M	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
413	ej	XC6105A234MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
414	eb	XC6404AA14M	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
414	ej	XC6105A235MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
415	-	R1114N151A	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
415	eb	XC6404AA15M	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
415	ej	XC6105A236MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
416	-	R1114N161A	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
416	eb	XC6404AA16M	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
416	ej	XC6105A237MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
417	-	R1114N171A	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
417	eb	XC6404AA17M	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
417	ej	XC6105A238MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
418	-	R1114N181A	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
418	eb	XC6404AA18M	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
418	ej	XC6105A239MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
419	-	R1114N191A	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
419	eb	XC6404AA19M	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
419	ej	XC6105A240MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41A	-	AAT60041A-S5	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
41A	ej	XC6105A241MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41-A	-	UTC8141-A	Vdet-IC	4.1V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
41B	-	AAT60041B-S5	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
41B	ej	XC6105A242MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41-B	-	UTC8141-B	Vdet-IC	4.1V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
41C	-	AAT60041C-S5	Vdet-IC	4.1V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
41C	-	TK11041M-1	Tdet-IC	Sensor (-30 to + 105°C), 10mV/°C, 4.5..10V	SOT-23-5	28	-	6a	Tok
41C	ej	XC6105A243MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41D	-	AAT60041D-S5	Vdet-IC	4.1V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
41D	ej	XC6105A244MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41E	ej	XC6105A245MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41F	ec	XC6105A216MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41F	ej	XC6105A246MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41H	ec	XC6105A217MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41H	ej	XC6105A247MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41K	-	TK71741S	LVR-IC	LDO, 4.1V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
41K	ec	XC6105A218MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41K	ej	XC6105A248MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41L	-	TK71641ASCL	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
41L	ec	XC6105A219MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41L	ej	XC6105A249MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41M	ec	XC6105A220MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41M	ej	XC6105A250MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41N	-	XC9140A191MR-G	DC-DC-IC	PWM step-up, 1.9V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
41N	ec	XC6105A221MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41P	-	XC9140A361MR-G	DC-DC-IC	PWM step-up, 3.6V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
41P	ec	XC6105A222MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41R	ec	XC6105A223MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41S	ec	XC6105A224MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41T	-	TK71441S	LVR-IC	LDO, 4.1V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
41T	-	XC9140C191MR-G	DC-DC-IC	PWM step-up, 1.9V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
41T	ec	XC6105A225MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41U	-	TK61041S	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Tok
41U	-	XC9140C361MR-G	DC-DC-IC	PWM step-up, 3.6V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
41U	ec	XC6105A226MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41V	ec	XC6105A227MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41X	ec	XC6105A228MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41Y	ec	XC6105A229MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
41Z	ec	XC6105A230MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
42	-	R1223N152H	DC-DC-IC	PWM step-down, +CE, 1.5V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
42	-	RN5RF42AA	LVR-IC	LRip, -CE, 4.2V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
42	-	RN5RZ42AA	LVR-IC	LDO, LN, 4.2V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
42	-	XC62EP4202MR-G	LVR-IC	LDO, boosted, 4.2V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
42	ea	XC62ER4202MR-G	LVR-IC	LDO, boosted, 4.2V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
42-	-	XC62HR4202MR-G	LVR-IC	LDO, 4.2V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
420	-	R1114N201A	LVR-IC	LDO, Low noise, 2.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
420	-	R1191N020B	LVR-IC	LDO, 2.0V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
420	eb	XC6404AA20M	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
420	ej	XC6105A331MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
420AC	-	BL8509-420ACRN	Vdet-IC	4.2V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
420AC	-	LC9009CB5TR420AC	Vdet-IC	4.2V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
420AN	-	BL8509-420ANRN	Vdet-IC	4.2V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
420AN	-	LC9009CB5TR420AN	Vdet-IC	4.2V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
420BC	-	BL8509-420BCRN	Vdet-IC	4.2V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
420BC	-	LC9009CB5TR420BC	Vdet-IC	4.2V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
420BN	-	BL8509-420BNRN	Vdet-IC	4.2V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
420BN	-	LC9009CB5TR420BN	Vdet-IC	4.2V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
420CC	-	BL8509-420CCRN	Vdet-IC	4.2V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
420CC	-	LC9009CB5TR420CC	Vdet-IC	4.2V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
420CN	-	BL8509-420CNRN	Vdet-IC	4.2V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
420CN	-	LC9009CB5TR420CN	Vdet-IC	4.2V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
420DC	-	BL8509-420DCRN	Vdet-IC	4.2V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
420DC	-	LC9009CB5TR420DC	Vdet-IC	4.2V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
420DN	-	BL8509-420DNRN	Vdet-IC	4.2V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
420DN	-	LC9009CB5TR420DN	Vdet-IC	4.2V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
420EC	-	BL8509-420ECRN	Vdet-IC	4.2V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
420EC	-	LC9009CB5TR420EC	Vdet-IC	4.2V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
420EN	-	BL8509-420ENRN	Vdet-IC	4.2V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
420EN	-	LC9009CB5TR420EN	Vdet-IC	4.2V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
420FC	-	BL8509-420FCRN	Vdet-IC	4.2V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
420FC	-	LC9009CB5TR420FC	Vdet-IC	4.2V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
420FN	-	BL8509-420FNRN	Vdet-IC	4.2V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
420FN	-	LC9009CB5TR420FN	Vdet-IC	4.2V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
420GC	-	BL8509-420GCRN	Vdet-IC	4.2V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
420GC	-	LC9009CB5TR420GC	Vdet-IC	4.2V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
420GN	-	BL8509-420GNRN	Vdet-IC	4.2V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
420GN	-	LC9009CB5TR420GN	Vdet-IC	4.2V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
421	-	R1114N211A	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
421	-	R1191N021B	LVR-IC	LDO, 2.1V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
421	eb	XC6404AA21M	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
421	ej	XC6105A332MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
422	-	R1114N221A	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
422	-	R1191N022B	LVR-IC	LDO, 2.2V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
422	eb	XC6404AA22M	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
422	ej	XC6105A333MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
423	-	R1114N231A	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
423	-	R1191N023B	LVR-IC	LDO, 2.3V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
423	eb	XC6404AA23M	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
423	ej	XC6105A334MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
424	-	R1114N241A	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
424	-	R1191N024B	LVR-IC	LDO, 2.4V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
424	eb	XC6404AA24M	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
424	ej	XC6105A335MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
425	-	R1114N251A	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
425	-	R1191N025B	LVR-IC	LDO, 2.5V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
425	eb	XC6404AA25M	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
425	ej	XC6105A336MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
426	-	R1114N261A	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
426	-	R1191N026B	LVR-IC	LDO, 2.6V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
426	eb	XC6404AA26M	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
426	ej	XC6105A337MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
427	-	R1114N271A	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
427	-	R1191N027B	LVR-IC	LDO, 2.7V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
427	eb	XC6404AA27M	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
427	ej	XC6105A338MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
428	-	R1114N281A	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
428	-	R1191N028B	LVR-IC	LDO, 2.8V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
428	eb	XC6404AA28M	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
428	ej	XC6105A339MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
429	-	R1114N291A	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
429	-	R1191N029B	LVR-IC	LDO, 2.9V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
429	eb	XC6404AA29M	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
429	ej	XC6105A340MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42A	-	AAT60042A-S5	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
42A	ej	XC6105A341MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42-A	-	UTC8142-A	Vdet-IC	4.2V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
42B	-	AAT60042B-S5	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
42B	ej	XC6105A342MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42-B	-	UTC8142-B	Vdet-IC	4.2V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
42C	-	AAT60042C-S5	Vdet-IC	4.2V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
42C	-	TK11042M-1	Tdet-IC	Sensor (-30 to + 105°C), 6mV/°C, 2.7..10V	SOT-23-5	28	-	6a	Tok
42C	ej	XC6105A343MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42D	-	AAT60042D-S5	Vdet-IC	4.2V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
42D	ej	XC6105A344MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42E	ej	XC6105A345MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42F	ec	XC6105A316MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42F	ej	XC6105A346MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42H	ec	XC6105A317MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42H	ej	XC6105A347MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42K	-	TK71742S	LVR-IC	LDO, 4.2V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
42K	ec	XC6105A318MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42K	ej	XC6105A348MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42L	-	TK71642ASCL	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
42L	ec	XC6105A319MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42L	ej	XC6105A349MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42M	ec	XC6105A320MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42M	ej	XC6105A350MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42N	-	XC9140A201MR-G	DC-DC-IC	PWM step-up, 2.0V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
42N	ec	XC6105A321MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42P	-	XC9140A371MR-G	DC-DC-IC	PWM step-up, 3.7V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
42P	ec	XC6105A322MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42R	ec	XC6105A323MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42S	ec	XC6105A324MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42T	-	TK71442S	LVR-IC	LDO, 4.2V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
42T	-	XC9140C201MR-G	DC-DC-IC	PWM step-up, 2.0V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
42T	ec	XC6105A325MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42U	-	TK61042S	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Tok
42U	-	XC9140C371MR-G	DC-DC-IC	PWM step-up, 3.7V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
42U	ec	XC6105A326MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42V	ec	XC6105A327MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42X	ec	XC6105A328MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42Y	ec	XC6105A329MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
42Z	ec	XC6105A330MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43	-	R1223N182H	DC-DC-IC	PWM step-down, +CE, 1.8V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
43	-	RN5RF43AA	LVR-IC	LRip, -CE, 4.3V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
43	-	RN5RZ43AA	LVR-IC	LDO, LN, 4.3V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
43	-	XC62EP4302MR-G	LVR-IC	LDO, boosted, 4.3V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
43	ea	XC62ER4302MR-G	LVR-IC	LDO, boosted, 4.3V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
43-	-	XC62HR4302MR-G	LVR-IC	LDO, 4.3V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
430	-	R1114N301A	LVR-IC	LDO, Low noise, 3.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
430	-	R1191N030B	LVR-IC	LDO, 3.0V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
430	eb	XC6404AA30M	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
430	ej	XC6105A431MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
430AC	-	BL8509-430ACRN	Vdet-IC	4.3V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
430AC	-	LC9009CB5TR430AC	Vdet-IC	4.3V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
430AN	-	BL8509-430ANRN	Vdet-IC	4.3V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
430AN	-	LC9009CB5TR430AN	Vdet-IC	4.3V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
430BC	-	BL8509-430BCRN	Vdet-IC	4.3V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
430BC	-	LC9009CB5TR430BC	Vdet-IC	4.3V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
430BN	-	BL8509-430BNRN	Vdet-IC	4.3V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
430BN	-	LC9009CB5TR430BN	Vdet-IC	4.3V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
430CC	-	BL8509-430CCRN	Vdet-IC	4.3V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
430CC	-	LC9009CB5TR430CC	Vdet-IC	4.3V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
430CN	-	BL8509-430CNRN	Vdet-IC	4.3V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
430CN	-	LC9009CB5TR430CN	Vdet-IC	4.3V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
430DC	-	BL8509-430DCRN	Vdet-IC	4.3V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
430DC	-	LC9009CB5TR430DC	Vdet-IC	4.3V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
430DN	-	BL8509-430DNRN	Vdet-IC	4.3V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
430DN	-	LC9009CB5TR430DN	Vdet-IC	4.3V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
430EC	-	BL8509-430ECRN	Vdet-IC	4.3V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
430EC	-	LC9009CB5TR430EC	Vdet-IC	4.3V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
430EN	-	BL8509-430ENRN	Vdet-IC	4.3V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
430EN	-	LC9009CB5TR430EN	Vdet-IC	4.3V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
430FC	-	BL8509-430FCRN	Vdet-IC	4.3V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
430FC	-	LC9009CB5TR430FC	Vdet-IC	4.3V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
430FN	-	BL8509-430FNRN	Vdet-IC	4.3V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
430FN	-	LC9009CB5TR430FN	Vdet-IC	4.3V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
430GC	-	BL8509-430GCRN	Vdet-IC	4.3V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
430GC	-	LC9009CB5TR430GC	Vdet-IC	4.3V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
430GN	-	BL8509-430GNRN	Vdet-IC	4.3V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
430GN	-	LC9009CB5TR430GN	Vdet-IC	4.3V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
431	-	R1114N311A	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
431	-	R1191N031B	LVR-IC	LDO, 3.1V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
431	eb	XC6404AA31M	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
431	ej	XC6105A432MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
432	-	R1114N321A	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
432	-	R1191N032B	LVR-IC	LDO, 3.2V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
432	eb	XC6404AA32M	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
432	ej	XC6105A433MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
433	-	R1114N331A	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
433	-	R1191N033B	LVR-IC	LDO, 3.3V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
433	eb	XC6404AA33M	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
433	ej	XC6105A434MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
434	-	R1114N341A	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
434	-	R1191N034B	LVR-IC	LDO, 3.4V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
434	eb	XC6404AA34M	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
434	ej	XC6105A435MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
435	-	R1114N351A	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
435	-	R1191N035B	LVR-IC	LDO, 3.5V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
435	ej	XC6105A436MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
436	-	R1114N361A	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
436	-	R1191N036B	LVR-IC	LDO, 3.6V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
436	ej	XC6105A437MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
437	-	R1114N371A	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
437	-	R1191N037B	LVR-IC	LDO, 3.7V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
437	ej	XC6105A438MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
438	-	R1114N381A	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
438	-	R1191N038B	LVR-IC	LDO, 3.8V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
438	ej	XC6105A439MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
439	-	R1114N391A	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
439	-	R1191N039B	LVR-IC	LDO, 3.9V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
439	ej	XC6105A440MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43A	-	AAT60043A-S5	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
43A	ej	XC6105A441MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43-A	-	UTC8143-A	Vdet-IC	4.3V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
43B	-	AAT60043B-S5	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
43B	ej	XC6105A442MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43-B	-	UTC8143-B	Vdet-IC	4.3V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
43C	-	AAT60043C-S5	Vdet-IC	4.3V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
43C	-	TK11043M-1	Tdet-IC	Sensor (-30 to + 105°C), 5mV/°C, 2.4..10V	SOT-23-5	28	-	6a	Tok
43C	ej	XC6105A443MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43D	-	AAT60043D-S5	Vdet-IC	4.3V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
43D	ej	XC6105A444MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43E	ej	XC6105A445MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43F	ec	XC6105A416MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43F	ej	XC6105A446MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43H	ec	XC6105A417MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43H	ej	XC6105A447MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43K	-	TK71743S	LVR-IC	LDO, 4.3V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
43K	ec	XC6105A418MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43K	ej	XC6105A448MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43L	-	TK71643ASCL	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
43L	ec	XC6105A419MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43L	ej	XC6105A449MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43M	ec	XC6105A420MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43M	ej	XC6105A450MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43N	-	XC9140A211MR-G	DC-DC-IC	PWM step-up, 2.1V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
43N	ec	XC6105A421MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43P	-	XC9140A381MR-G	DC-DC-IC	PWM step-up, 3.8V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
43P	ec	XC6105A422MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43R	ec	XC6105A423MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43S	ec	XC6105A424MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43T	-	TK71443S	LVR-IC	LDO, 4.3V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
43T	-	XC9140C211MR-G	DC-DC-IC	PWM step-up, 2.1V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
43T	ec	XC6105A425MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43U	-	XC9140C381MR-G	DC-DC-IC	PWM step-up, 3.8V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
43U	ec	XC6105A426MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43V	ec	XC6105A427MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43X	ec	XC6105A428MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43Y	ec	XC6105A429MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
43Z	ec	XC6105A430MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44	-	R1223N252H	DC-DC-IC	PWM step-down, +CE, 2.5V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
44	-	RN5RF44AA	LVR-IC	LRip, -CE, 4.4V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
44	-	RN5RZ44AA	LVR-IC	LDO, LN, 4.4V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
44	-	XC62EP4402MR-G	LVR-IC	LDO, boosted, 4.4V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
44	ea	XC62ER4402MR-G	LVR-IC	LDO, boosted, 4.4V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
44-	-	XC62HR4402MR-G	LVR-IC	LDO, 4.4V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
440	-	R1114N401A	LVR-IC	LDO, Low noise, 4.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
440	-	R1191N040B	LVR-IC	LDO, 4.0V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
440	ej	XC6105A531MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
440AC	-	BL8509-440ACRN	Vdet-IC	4.4V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
440AC	-	LC9009CB5TR440AC	Vdet-IC	4.4V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
440AN	-	BL8509-440ANRN	Vdet-IC	4.4V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
440AN	-	LC9009CB5TR440AN	Vdet-IC	4.4V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
440BC	-	BL8509-440BCRN	Vdet-IC	4.4V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
440BC	-	LC9009CB5TR440BC	Vdet-IC	4.4V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
440BN	-	BL8509-440BNRN	Vdet-IC	4.4V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
440BN	-	LC9009CB5TR440BN	Vdet-IC	4.4V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
440CC	-	BL8509-440CCRN	Vdet-IC	4.4V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
440CC	-	LC9009CB5TR440CC	Vdet-IC	4.4V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
440CN	-	BL8509-440CNRN	Vdet-IC	4.4V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
440CN	-	LC9009CB5TR440CN	Vdet-IC	4.4V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
440DC	-	BL8509-440DCRN	Vdet-IC	4.4V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
440DC	-	LC9009CB5TR440DC	Vdet-IC	4.4V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
440DN	-	BL8509-440DNRN	Vdet-IC	4.4V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
440DN	-	LC9009CB5TR440DN	Vdet-IC	4.4V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
440EC	-	BL8509-440ECRN	Vdet-IC	4.4V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
440EC	-	LC9009CB5TR440EC	Vdet-IC	4.4V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
440EN	-	BL8509-440ENRN	Vdet-IC	4.4V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
440EN	-	LC9009CB5TR440EN	Vdet-IC	4.4V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
440FC	-	BL8509-440FCRN	Vdet-IC	4.4V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
440FC	-	LC9009CB5TR440FC	Vdet-IC	4.4V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
440FN	-	BL8509-440FNRN	Vdet-IC	4.4V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
440FN	-	LC9009CB5TR440FN	Vdet-IC	4.4V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
440GC	-	BL8509-440GCRN	Vdet-IC	4.4V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
440GC	-	LC9009CB5TR440GC	Vdet-IC	4.4V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
440GN	-	BL8509-440GNRN	Vdet-IC	4.4V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
440GN	-	LC9009CB5TR440GN	Vdet-IC	4.4V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
441	-	R1114N281A5	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
441	-	R1191N041B	LVR-IC	LDO, 4.1V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
441	ej	XC6105A532MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
442	-	R1191N042B	LVR-IC	LDO, 4.2V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
442	ej	XC6105A533MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
443	-	R1191N043B	LVR-IC	LDO, 4.3V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
443	ej	XC6105A534MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
444	-	R1191N044B	LVR-IC	LDO, 4.4V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
444	ej	XC6105A535MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
445	-	R1191N045B	LVR-IC	LDO, 4.5V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
445	ej	XC6105A536MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
446	-	R1191N046B	LVR-IC	LDO, 4.6V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
446	ej	XC6105A537MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
447	-	R1191N047B	LVR-IC	LDO, 4.7V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
447	ej	XC6105A538MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
448	-	R1191N048B	LVR-IC	LDO, 4.8V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
448	ej	XC6105A539MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
449	-	R1191N049B	LVR-IC	LDO, 4.9V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
449	ej	XC6105A540MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44A	-	AAT60044A-S5	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
44A	-	AP6233S-10NHFGP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
44A	-	AP6233S-10NHFPP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
44A	eb	AP6233S-10NHFGA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44A	eb	AP6233S-10NHFPA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
44A	ec	AP6233S-10NHFGA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44A	ec	AP6233S-10NHFPA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
44A	eh	AP6233S-10NHFGP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44A	eh	AP6233S-10NHFPP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
44A	ej	XC6105A541MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44-A	-	UTC8144-A	Vdet-IC	4.4V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
44B	-	AAT60044B-S5	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
44B	-	AP6233S-10NLFGP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44B	-	AP6233S-10NLFPP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
44B	eb	AP6233S-10NLFGA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44B	eb	AP6233S-10NLFPA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
44B	ec	AP6233S-10NLFGA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44B	ec	AP6233S-10NLFPA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
44B	eh	AP6233S-10NLFGP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44B	eh	AP6233S-10NLFPP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
44B	ej	XC6105A542MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44-B	-	UTC8144-B	Vdet-IC	4.4V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
44C	-	AAT60044C-S5	Vdet-IC	4.4V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
44C	-	AP6233S-10NHNGP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44C	-	AP6233S-10NHNPP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
44C	eb	AP6233S-10NHNGA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44C	eb	AP6233S-10NHNPA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
44C	ec	AP6233S-10NHNGA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44C	ec	AP6233S-10NHNPA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
44C	eh	AP6233S-10NHNGP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44C	eh	AP6233S-10NHNPP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
44C	ej	XC6105A543MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44D	-	AAT60044D-S5	Vdet-IC	4.4V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
44D	-	AP6233S-10NLNGP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44D	-	AP6233S-10NLNPP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
44D	eb	AP6233S-10NLNGA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44D	eb	AP6233S-10NLNPA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
44D	ec	AP6233S-10NLNGA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44D	ec	AP6233S-10NLNPA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
44D	eh	AP6233S-10NLNGP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44D	eh	AP6233S-10NLNPP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
44D	ej	XC6105A544MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44E	-	AP6233S-10UHFGP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44E	-	AP6233S-10UHFPP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
44E	eb	AP6233S-10UHFGA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44E	eb	AP6233S-10UHFPA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
44E	ec	AP6233S-10UHFGA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44E	ec	AP6233S-10UHFPA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
44E	eh	AP6233S-10UHFGP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44E	eh	AP6233S-10UHFPP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
44E	ej	XC6105A545MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44F	-	AP6233S-10ULFGP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44F	-	AP6233S-10ULFPP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
44F	eb	AP6233S-10ULFGA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44F	eb	AP6233S-10ULFPA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
44F	ec	AP6233S-10ULFGA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44F	ec	AP6233S-10ULFPA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
44F	ec	XC6105A516MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44F	eh	AP6233S-10ULFGP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44F	eh	AP6233S-10ULFPP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
44F	ej	XC6105A546MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44G	-	AP6233S-10UHNGP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44G	-	AP6233S-10UHNPP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
44G	eb	AP6233S-10UHNGA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44G	eb	AP6233S-10UHNPA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
44G	ec	AP6233S-10UHNGA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44G	ec	AP6233S-10UHNPA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
44G	eh	AP6233S-10UHNGP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44G	eh	AP6233S-10UHNPP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
44H	-	AP6233S-10ULNGP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44H	-	AP6233S-10ULNPP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
44H	eb	AP6233S-10ULNGA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
44H	eb	AP6233S-10ULNPA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
44H	ec	AP6233S-10ULNGA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44H	ec	AP6233S-10ULNPA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
44H	ec	XC6105A517MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44H	eh	AP6233S-10ULNGP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44H	eh	AP6233S-10ULNPP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
44H	ej	XC6105A547MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44J	-	AP6233S-10DHFGP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44J	-	AP6233S-10DHFPP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
44J	eb	AP6233S-10DHFGA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44J	eb	AP6233S-10DHFPA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
44J	ec	AP6233S-10DHFGA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44J	ec	AP6233S-10DHFPA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
44J	eh	AP6233S-10DHFGP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44J	eh	AP6233S-10DHFPP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
44K	-	AP6233S-10DLFGP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44K	-	AP6233S-10DLFPP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
44K	-	TK71744S	LVR-IC	LDO, 4.4V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
44K	eb	AP6233S-10DLFGA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44K	eb	AP6233S-10DLFPA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
44K	ec	AP6233S-10DLFGA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44K	ec	AP6233S-10DLFPA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
44K	ec	XC6105A518MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44K	eh	AP6233S-10DLFGP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44K	eh	AP6233S-10DLFPP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
44K	ej	XC6105A548MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44L	-	AP6233S-10DHNGP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44L	-	AP6233S-10DHNPP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
44L	-	TK71644ASCL	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
44L	eb	AP6233S-10DHNGA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44L	eb	AP6233S-10DHNPA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
44L	ec	AP6233S-10DHNGA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44L	ec	AP6233S-10DHNPA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
44L	ec	XC6105A519MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44L	eh	AP6233S-10DHNGP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44L	eh	AP6233S-10DHNPP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
44L	ej	XC6105A549MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44M	-	AP6233S-10DLNGP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44M	-	AP6233S-10DLNPP	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
44M	eb	AP6233S-10DLNGA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44M	eb	AP6233S-10DLNPA	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
44M	ec	AP6233S-10DLNGA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
44M	ec	AP6233S-10DLNPA1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
44M	ec	XC6105A520MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44M	eh	AP6233S-10DLNGP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
44M	eh	AP6233S-10DLNPP1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
44M	ej	XC6105A550MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44N	-	XC9140A221MR-G	DC-DC-IC	PWM step-up, 2.2V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
44N	ec	XC6105A521MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44P	-	XC9140A391MR-G	DC-DC-IC	PWM step-up, 3.9V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
44P	ec	XC6105A522MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44R	ec	XC6105A523MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44S	ec	XC6105A524MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44T	-	TK71444S	LVR-IC	LDO, 4.4V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
44T	-	XC9140C221MR-G	DC-DC-IC	PWM step-up, 2.2V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
44T	ec	XC6105A525MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44U	-	XC9140C391MR-G	DC-DC-IC	PWM step-up, 3.9V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
44U	ec	XC6105A526MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44V	ec	XC6105A527MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44X	ec	XC6105A528MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44Y	ec	XC6105A529MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
44Z	ec	XC6105A530MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45	-	R1223N302H	DC-DC-IC	PWM step-down, +CE, 3V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
45	-	RN5RF45AA	LVR-IC	LRip, -CE, 4.5V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
45	-	RN5RZ45AA	LVR-IC	LDO, LN, 4.5V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
45	-	XC62EP4502MR-G	LVR-IC	LDO, boosted, 4.5V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
45	ea	XC62ER4502MR-G	LVR-IC	LDO, boosted, 4.5V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
45-	-	XC62HR4502MR-G	LVR-IC	LDO, 4.5V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
450	-	R1191N050B	LVR-IC	LDO, 5.0V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
450	ej	XC6105A631MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
450AC	-	BL8509-450ACRN	Vdet-IC	4.5V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
450AC	-	LC9009CB5TR450AC	Vdet-IC	4.5V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
450AN	-	BL8509-450ANRN	Vdet-IC	4.5V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
450AN	-	LC9009CB5TR450AN	Vdet-IC	4.5V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
450BC	-	BL8509-450BCRN	Vdet-IC	4.5V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
450BC	-	LC9009CB5TR450BC	Vdet-IC	4.5V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
450BN	-	BL8509-450BNRN	Vdet-IC	4.5V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
450BN	-	LC9009CB5TR450BN	Vdet-IC	4.5V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
450CC	-	BL8509-450CCRN	Vdet-IC	4.5V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
450CC	-	LC9009CB5TR450CC	Vdet-IC	4.5V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
450CN	-	BL8509-450CNRN	Vdet-IC	4.5V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
450CN	-	LC9009CB5TR450CN	Vdet-IC	4.5V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
450DC	-	BL8509-450DCRN	Vdet-IC	4.5V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
450DC	-	LC9009CB5TR450DC	Vdet-IC	4.5V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
450DN	-	BL8509-450DNRN	Vdet-IC	4.5V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
450DN	-	LC9009CB5TR450DN	Vdet-IC	4.5V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
450EC	-	BL8509-450ECRN	Vdet-IC	4.5V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
450EC	-	LC9009CB5TR450EC	Vdet-IC	4.5V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
450EN	-	BL8509-450ENRN	Vdet-IC	4.5V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
450EN	-	LC9009CB5TR450EN	Vdet-IC	4.5V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
450FC	-	BL8509-450FCRN	Vdet-IC	4.5V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
450FC	-	LC9009CB5TR450FC	Vdet-IC	4.5V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
450FN	-	BL8509-450FNRN	Vdet-IC	4.5V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
450FN	-	LC9009CB5TR450FN	Vdet-IC	4.5V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
450GC	-	BL8509-450GCRN	Vdet-IC	4.5V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
450GC	-	LC9009CB5TR450GC	Vdet-IC	4.5V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
450GN	-	BL8509-450GNRN	Vdet-IC	4.5V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
450GN	-	LC9009CB5TR450GN	Vdet-IC	4.5V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
451	-	R1191N051B	LVR-IC	LDO, 5.1V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
451	ej	XC6105A632MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
452	-	R1191N052B	LVR-IC	LDO, 5.2V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
452	ej	XC6105A633MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
453	-	R1191N053B	LVR-IC	LDO, 5.3V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
453	ej	XC6105A634MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
454	-	R1191N054B	LVR-IC	LDO, 5.4V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
454	ej	XC6105A635MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
455	-	R1191N055B	LVR-IC	LDO, 5.5V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
455	ej	XC6105A636MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
456	-	R1191N056B	LVR-IC	LDO, 5.6V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
456	ej	XC6105A637MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
457	-	R1191N057B	LVR-IC	LDO, 5.7V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
457	ej	XC6105A638MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
458	-	R1191N058B	LVR-IC	LDO, 5.8V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
458	ej	XC6105A639MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
459	-	R1191N059B	LVR-IC	LDO, 5.9V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
459	ej	XC6105A640MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45A	-	AAT60045A-S5	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
45A	-	AP6233S-12NHFGP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45A	-	AP6233S-12NHFPP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
45A	eb	AP6233S-12NHFGA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45A	eb	AP6233S-12NHFPA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
45A	ec	AP6233S-12NHFGA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45A	ec	AP6233S-12NHFPA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
45A	eh	AP6233S-12NHFGP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45A	eh	AP6233S-12NHFPP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
45A	ej	XC6105A641MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45-A	-	UTC8145-A	Vdet-IC	4.5V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
45B	-	AAT60045B-S5	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
45B	-	AP6233S-12NLFGP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45B	-	AP6233S-12NLFPP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
45B	eb	AP6233S-12NLFGA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45B	eb	AP6233S-12NLFPA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
45B	ec	AP6233S-12NLFGA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45B	ec	AP6233S-12NLFPA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
45B	eh	AP6233S-12NLFGP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45B	eh	AP6233S-12NLFPP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
45B	ej	XC6105A642MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45-B	-	UTC8145-B	Vdet-IC	4.5V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
45C	-	AAT60045C-S5	Vdet-IC	4.5V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
45C	-	AP6233S-12NHNGP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
45C	-	AP6233S-12NHNPP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
45C	eb	AP6233S-12NHNGA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45C	eb	AP6233S-12NHNPA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
45C	ec	AP6233S-12NHNGA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45C	ec	AP6233S-12NHNPA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
45C	eh	AP6233S-12NHNGP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45C	eh	AP6233S-12NHNPP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
45C	ej	XC6105A643MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45D	-	AAT60045D-S5	Vdet-IC	4.5V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
45D	-	AP6233S-12NLNGP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45D	-	AP6233S-12NLNPP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
45D	eb	AP6233S-12NLNGA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45D	eb	AP6233S-12NLNPA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
45D	ec	AP6233S-12NLNGA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45D	ec	AP6233S-12NLNPA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
45D	eh	AP6233S-12NLNGP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45D	eh	AP6233S-12NLNPP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
45D	ej	XC6105A644MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45E	-	AP6233S-12UHFGP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45E	-	AP6233S-12UHFPP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
45E	eb	AP6233S-12UHFGA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45E	eb	AP6233S-12UHFPA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
45E	ec	AP6233S-12UHFGA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45E	ec	AP6233S-12UHFPA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
45E	eh	AP6233S-12UHFGP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45E	eh	AP6233S-12UHFPP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
45E	ej	XC6105A645MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45F	-	AP6233S-12ULFGP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45F	-	AP6233S-12ULFPP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
45F	eb	AP6233S-12ULFGA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45F	eb	AP6233S-12ULFPA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
45F	ec	AP6233S-12ULFGA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45F	ec	AP6233S-12ULFPA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
45F	ec	XC6105A616MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45F	eh	AP6233S-12ULFGP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45F	eh	AP6233S-12ULFPP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
45F	ej	XC6105A646MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45G	-	AP6233S-12UHNGP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45G	-	AP6233S-12UHNPP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
45G	eb	AP6233S-12UHNGA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45G	eb	AP6233S-12UHNPA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
45G	ec	AP6233S-12UHNGA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45G	ec	AP6233S-12UHNPA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
45G	eh	AP6233S-12UHNGP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45G	eh	AP6233S-12UHNPP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
45H	-	AP6233S-12ULNGP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45H	-	AP6233S-12ULNPP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
45H	eb	AP6233S-12ULNGA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45H	eb	AP6233S-12ULNPA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
45H	ec	AP6233S-12ULNGA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45H	ec	AP6233S-12ULNPA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
45H	ec	XC6105A617MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45H	eh	AP6233S-12ULNGP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45H	eh	AP6233S-12ULNPP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
45H	ej	XC6105A647MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45J	-	AP6233S-12DHFGP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45J	-	AP6233S-12DHFPP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
45J	eb	AP6233S-12DHFGA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45J	eb	AP6233S-12DHFPA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
45J	ec	AP6233S-12DHFGA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45J	ec	AP6233S-12DHFPA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
45J	eh	AP6233S-12DHFGP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45J	eh	AP6233S-12DHFPP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
45K	-	AP6233S-12DLFGP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45K	-	AP6233S-12DLFPP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
45K	-	TK71745S	LVR-IC	LDO, 4.5V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
45K	eb	AP6233S-12DLFGA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45K	eb	AP6233S-12DLFPA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
45K	ec	AP6233S-12DLFGA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45K	ec	AP6233S-12DLFPA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
45K	ec	XC6105A618MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45K	eh	AP6233S-12DLFGP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45K	eh	AP6233S-12DLFPP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
45K	ej	XC6105A648MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45L	-	AP6233S-12DHNGP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45L	-	AP6233S-12DHNPP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
45L	-	TK71645ASCL	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
45L	eb	AP6233S-12DHNGA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45L	eb	AP6233S-12DHNPA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
45L	ec	AP6233S-12DHNGA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45L	ec	AP6233S-12DHNPA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
45L	ec	XC6105A619MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45L	eh	AP6233S-12DHNGP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45L	eh	AP6233S-12DHNPP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
45L	ej	XC6105A649MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45M	-	AP6233S-12DLNGP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45M	-	AP6233S-12DLNPP	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
45M	eb	AP6233S-12DLNGA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45M	eb	AP6233S-12DLNPA	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
45M	ec	AP6233S-12DLNGA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
45M	ec	AP6233S-12DLNPA1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
45M	ec	XC6105A620MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45M	eh	AP6233S-12DLNGP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
45M	eh	AP6233S-12DLNPP1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
45M	ej	XC6105A650MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45N	-	XC9140A231MR-G	DC-DC-IC	PWM step-up, 2.3V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
45N	ec	XC6105A621MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45P	-	XC9140A401MR-G	DC-DC-IC	PWM step-up, 4.0V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
45P	ec	XC6105A622MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45R	ec	XC6105A623MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45S	ec	XC6105A624MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45T	-	TK71445S	LVR-IC	LDO, 4.5V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
45T	-	XC9140C231MR-G	DC-DC-IC	PWM step-up, 2.3V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
45T	ec	XC6105A625MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45U	-	TK61045S	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Tok
45U	-	XC9140C401MR-G	DC-DC-IC	PWM step-up, 4.0V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
45U	ec	XC6105A626MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45V	ec	XC6105A627MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45X	ec	XC6105A628MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45Y	ec	XC6105A629MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
45Z	ec	XC6105A630MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
46	-	R1223N332H	DC-DC-IC	PWM step-down, +CE, 3.3V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
46	-	RN5RF46AA	LVR-IC	LRip, -CE, 4.6V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
46	-	RN5RZ46AA	LVR-IC	LDO, LN, 4.6V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
46	-	XC62EP4602MR-G	LVR-IC	LDO, boosted, 4.6V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
46	ea	XC62ER4602MR-G	LVR-IC	LDO, boosted, 4.6V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
46-	-	XC62HR4602MR-G	LVR-IC	LDO, 4.6V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
460	-	R1191N060B	LVR-IC	LDO, 6.0V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
460	ej	XC6105B231MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
460AC	-	BL8509-460ACRN	Vdet-IC	4.6V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
460AC	-	LC9009CB5TR460AC	Vdet-IC	4.6V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
460AN	-	BL8509-460ANRN	Vdet-IC	4.6V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
460AN	-	LC9009CB5TR460AN	Vdet-IC	4.6V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
460BC	-	BL8509-460BCRN	Vdet-IC	4.6V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
460BC	-	LC9009CB5TR460BC	Vdet-IC	4.6V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
460BN	-	BL8509-460BNRN	Vdet-IC	4.6V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
460BN	-	LC9009CB5TR460BN	Vdet-IC	4.6V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
460CC	-	BL8509-460CCRN	Vdet-IC	4.6V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
460CC	-	LC9009CB5TR460CC	Vdet-IC	4.6V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
460CN	-	BL8509-460CNRN	Vdet-IC	4.6V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
460CN	-	LC9009CB5TR460CN	Vdet-IC	4.6V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
460DC	-	BL8509-460DCRN	Vdet-IC	4.6V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
460DC	-	LC9009CB5TR460DC	Vdet-IC	4.6V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
460DN	-	BL8509-460DNRN	Vdet-IC	4.6V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
460DN	-	LC9009CB5TR460DN	Vdet-IC	4.6V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
460EC	-	BL8509-460ECRN	Vdet-IC	4.6V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
460EC	-	LC9009CB5TR460EC	Vdet-IC	4.6V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
460EN	-	BL8509-460ENRN	Vdet-IC	4.6V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
460EN	-	LC9009CB5TR460EN	Vdet-IC	4.6V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
460FC	-	BL8509-460FCRN	Vdet-IC	4.6V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
460FC	-	LC9009CB5TR460FC	Vdet-IC	4.6V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
460FN	-	BL8509-460FNRN	Vdet-IC	4.6V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
460FN	-	LC9009CB5TR460FN	Vdet-IC	4.6V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
460GC	-	BL8509-460GCRN	Vdet-IC	4.6V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
460GC	-	LC9009CB5TR460GC	Vdet-IC	4.6V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
460GN	-	BL8509-460GNRN	Vdet-IC	4.6V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
460GN	-	LC9009CB5TR460GN	Vdet-IC	4.6V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
461	-	R1191N061B	LVR-IC	LDO, 6.1V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
461	ej	XC6105B232MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
462	-	R1191N062B	LVR-IC	LDO, 6.2V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
462	ej	XC6105B233MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
463	-	R1191N063B	LVR-IC	LDO, 6.3V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
463	ej	XC6105B234MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
464	-	R1191N064B	LVR-IC	LDO, 6.4V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
464	ej	XC6105B235MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
465	-	R1191N065B	LVR-IC	LDO, 6.5V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
465	ej	XC6105B236MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
465AC	-	BL8509-465ACRN	Vdet-IC	4.65V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
465AN	-	BL8509-465ANRN	Vdet-IC	4.65V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
465BC	-	BL8509-465BCRN	Vdet-IC	4.65V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
465BN	-	BL8509-465BNRN	Vdet-IC	4.65V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
465CC	-	BL8509-465CCRN	Vdet-IC	4.65V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
465CN	-	BL8509-465CNRN	Vdet-IC	4.65V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
465DC	-	BL8509-465DCRN	Vdet-IC	4.65V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
465DN	-	BL8509-465DNRN	Vdet-IC	4.65V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
465EC	-	BL8509-465ECRN	Vdet-IC	4.65V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
465EN	-	BL8509-465ENRN	Vdet-IC	4.65V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
465FC	-	BL8509-465FCRN	Vdet-IC	4.65V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
465FN	-	BL8509-465FNRN	Vdet-IC	4.65V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
465GC	-	BL8509-465GCRN	Vdet-IC	4.65V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
465GN	-	BL8509-465GNRN	Vdet-IC	4.65V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
466	-	R1191N066B	LVR-IC	LDO, 6.6V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
466	ej	XC6105B237MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
467	-	R1191N067B	LVR-IC	LDO, 6.7V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
467	ej	XC6105B238MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
468	-	R1191N068B	LVR-IC	LDO, 6.8V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
468	ej	XC6105B239MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
469	-	R1191N069B	LVR-IC	LDO, 6.9V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
469	ej	XC6105B240MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46A	-	AAT60046A-S5	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
46A	ej	XC6105B241MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46-A	-	UTC8146-A	Vdet-IC	4.6V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
46B	-	AAT60046B-S5	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
46B	ej	XC6105B242MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46-B	-	UTC8146-B	Vdet-IC	4.6V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
46C	-	AAT60046C-S5	Vdet-IC	4.6V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
46C	ej	XC6105B243MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46D	-	AAT60046D-S5	Vdet-IC	4.6V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
46D	ej	XC6105B244MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46E	ej	XC6105B245MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46F	ec	XC6105B216MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46F	ej	XC6105B246MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46H	ec	XC6105B217MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46H	ej	XC6105B247MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46K	-	TK71746S	LVR-IC	LDO, 4.6V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
46K	ec	XC6105B218MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46K	ej	XC6105B248MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46L	-	TK71646ASCL	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
46L	ec	XC6105B219MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46L	ej	XC6105B249MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46M	ec	XC6105B220MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46M	ej	XC6105B250MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46N	-	XC9140A241MR-G	DC-DC-IC	PWM step-up, 2.4V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
46N	ec	XC6105B221MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46P	-	XC9140A411MR-G	DC-DC-IC	PWM step-up, 4.1V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
46P	ec	XC6105B222MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46R	ec	XC6105B223MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46S	ec	XC6105B224MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46T	-	TK71446S	LVR-IC	LDO, 4.6V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
46T	-	XC9140C241MR-G	DC-DC-IC	PWM step-up, 2.4V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
46T	ec	XC6105B225MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46U	-	XC9140C411MR-G	DC-DC-IC	PWM step-up, 4.1V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
46U	ec	XC6105B226MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46V	ec	XC6105B227MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46X	ec	XC6105B228MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46Y	ec	XC6105B229MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
46Z	ec	XC6105B230MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47	-	R1223N502H	DC-DC-IC	PWM step-down, +CE, 5V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
47	-	RN5RF47AA	LVR-IC	LRip, -CE, 4.7V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
47	-	RN5RZ47AA	LVR-IC	LDO, LN, 4.7V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
47	-	XC62EP4702MR-G	LVR-IC	LDO, boosted, 4.7V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
47	ea	XC62ER4702MR-G	LVR-IC	LDO, boosted, 4.7V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
47-	-	XC62HR4702MR-G	LVR-IC	LDO, 4.7V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
470	-	R1191N070B	LVR-IC	LDO, 7.0V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
470	ej	XC6105B331MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
470AC	-	BL8509-470ACRN	Vdet-IC	4.7V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
470AC	-	LC9009CB5TR470AC	Vdet-IC	4.7V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
470AN	-	BL8509-470ANRN	Vdet-IC	4.7V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
470AN	-	LC9009CB5TR470AN	Vdet-IC	4.7V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
470BC	-	BL8509-470BCRN	Vdet-IC	4.7V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
470BC	-	LC9009CB5TR470BC	Vdet-IC	4.7V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
470BN	-	BL8509-470BNRN	Vdet-IC	4.7V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
470BN	-	LC9009CB5TR470BN	Vdet-IC	4.7V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
470CC	-	BL8509-470CCRN	Vdet-IC	4.7V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
470CC	-	LC9009CB5TR470CC	Vdet-IC	4.7V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
470CN	-	BL8509-470CNRN	Vdet-IC	4.7V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
470CN	-	LC9009CB5TR470CN	Vdet-IC	4.7V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
470DC	-	BL8509-470DCRN	Vdet-IC	4.7V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
470DC	-	LC9009CB5TR470DC	Vdet-IC	4.7V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
470DN	-	BL8509-470DNRN	Vdet-IC	4.7V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
470DN	-	LC9009CB5TR470DN	Vdet-IC	4.7V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
470EC	-	BL8509-470ECRN	Vdet-IC	4.7V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
470EC	-	LC9009CB5TR470EC	Vdet-IC	4.7V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
470EN	-	BL8509-470ENRN	Vdet-IC	4.7V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
470EN	-	LC9009CB5TR470EN	Vdet-IC	4.7V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
470FC	-	BL8509-470FCRN	Vdet-IC	4.7V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
470FC	-	LC9009CB5TR470FC	Vdet-IC	4.7V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
470FN	-	BL8509-470FNRN	Vdet-IC	4.7V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
470FN	-	LC9009CB5TR470FN	Vdet-IC	4.7V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
470GC	-	BL8509-470GCRN	Vdet-IC	4.7V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
470GC	-	LC9009CB5TR470GC	Vdet-IC	4.7V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
470GN	-	BL8509-470GNRN	Vdet-IC	4.7V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
470GN	-	LC9009CB5TR470GN	Vdet-IC	4.7V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
471	-	R1191N071B	LVR-IC	LDO, 7.1V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
471	ej	XC6105B332MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
472	-	R1191N072B	LVR-IC	LDO, 7.2V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
472	ej	XC6105B333MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
473	-	R1191N073B	LVR-IC	LDO, 7.3V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
473	ej	XC6105B334MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
474	-	R1191N074B	LVR-IC	LDO, 7.4V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
474	ej	XC6105B335MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
475	-	R1191N075B	LVR-IC	LDO, 7.5V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
475	ej	XC6105B336MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
476	-	R1191N076B	LVR-IC	LDO, 7.6V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
476	ej	XC6105B337MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
477	-	R1191N077B	LVR-IC	LDO, 7.7V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
477	ej	XC6105B338MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
478	-	R1191N078B	LVR-IC	LDO, 7.8V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
478	ej	XC6105B339MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
479	-	R1191N079B	LVR-IC	LDO, 7.9V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
479	ej	XC6105B340MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47A	-	AAT60047A-S5	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
47A	ej	XC6105B341MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47B	-	AAT60047B-S5	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
47B	ej	XC6105B342MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47C	-	AAT60047C-S5	Vdet-IC	4.7V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
47C	ej	XC6105B343MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47D	-	AAT60047D-S5	Vdet-IC	4.7V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
47D	ej	XC6105B344MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47E	ej	XC6105B345MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
47F	ec	XC6105B316MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47F	ej	XC6105B346MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47H	ec	XC6105B317MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47H	ej	XC6105B347MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47K	-	TK71747S	LVR-IC	LDO, 4.7V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
47K	ec	XC6105B318MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47K	ej	XC6105B348MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47L	-	TK71647ASCL	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
47L	ec	XC6105B319MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47L	ej	XC6105B349MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47M	ec	XC6105B320MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47M	ej	XC6105B350MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47N	-	XC9140A251MR-G	DC-DC-IC	PWM step-up, 2.5V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
47N	ec	XC6105B321MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47P	-	XC9140A421MR-G	DC-DC-IC	PWM step-up, 4.2V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
47P	ec	XC6105B322MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47R	ec	XC6105B323MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47S	ec	XC6105B324MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47T	-	TK71447S	LVR-IC	LDO, 4.7V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
47T	-	XC9140C251MR-G	DC-DC-IC	PWM step-up, 2.5V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
47T	ec	XC6105B325MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47U	-	XC9140C421MR-G	DC-DC-IC	PWM step-up, 4.2V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
47U	ec	XC6105B326MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47V	ec	XC6105B327MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47X	ec	XC6105B328MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47Y	ec	XC6105B329MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
47Z	ec	XC6105B330MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48	-	R1223N162F	DC-DC-IC	PWM/VFM step-down, +CE, 1.6V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
48	-	RN5RF48AA	LVR-IC	LRip, -CE, 4.8V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
48	-	RN5RZ48AA	LVR-IC	LDO, LN, 4.8V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
48	-	XC62EP4802MR-G	LVR-IC	LDO, boosted, 4.8V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
48	ea	XC62ER4802MR-G	LVR-IC	LDO, boosted, 4.8V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
48-	-	XC62HR4802MR-G	LVR-IC	LDO, 4.8V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
480	-	R1191N080B	LVR-IC	LDO, 8.0V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
480	eb	XC6404AA80M	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
480	ej	XC6105B431MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
480AC	-	BL8509-480ACRN	Vdet-IC	4.8V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
480AC	-	LC9009CB5TR480AC	Vdet-IC	4.8V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
480AN	-	BL8509-480ANRN	Vdet-IC	4.8V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
480AN	-	LC9009CB5TR480AN	Vdet-IC	4.8V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
480BC	-	BL8509-480BCRN	Vdet-IC	4.8V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
480BC	-	LC9009CB5TR480BC	Vdet-IC	4.8V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
480BN	-	BL8509-480BNRN	Vdet-IC	4.8V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
480BN	-	LC9009CB5TR480BN	Vdet-IC	4.8V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
480CC	-	BL8509-480CCRN	Vdet-IC	4.8V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
480CC	-	LC9009CB5TR480CC	Vdet-IC	4.8V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
480CN	-	BL8509-480CNRN	Vdet-IC	4.8V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
480CN	-	LC9009CB5TR480CN	Vdet-IC	4.8V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
480DC	-	BL8509-480DCRN	Vdet-IC	4.8V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
480DC	-	LC9009CB5TR480DC	Vdet-IC	4.8V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
480DN	-	BL8509-480DNRN	Vdet-IC	4.8V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
480DN	-	LC9009CB5TR480DN	Vdet-IC	4.8V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
480EC	-	BL8509-480ECRN	Vdet-IC	4.8V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
480EC	-	LC9009CB5TR480EC	Vdet-IC	4.8V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
480EN	-	BL8509-480ENRN	Vdet-IC	4.8V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
480EN	-	LC9009CB5TR480EN	Vdet-IC	4.8V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
480FC	-	BL8509-480FCRN	Vdet-IC	4.8V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
480FC	-	LC9009CB5TR480FC	Vdet-IC	4.8V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
480FN	-	BL8509-480FNRN	Vdet-IC	4.8V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
480FN	-	LC9009CB5TR480FN	Vdet-IC	4.8V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
480GC	-	BL8509-480GCRN	Vdet-IC	4.8V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
480GC	-	LC9009CB5TR480GC	Vdet-IC	4.8V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
480GN	-	BL8509-480GNRN	Vdet-IC	4.8V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
480GN	-	LC9009CB5TR480GN	Vdet-IC	4.8V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
481	-	R1191N081B	LVR-IC	LDO, 8.1V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
481	eb	XC6404AA81M	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
481	ej	XC6105B432MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
482	-	R1191N082B	LVR-IC	LDO, 8.2V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
482	eb	XC6404AA82M	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
482	ej	XC6105B433MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
483	-	R1191N083B	LVR-IC	LDO, 8.3V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
483	eb	XC6404AA83M	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
483	ej	XC6105B434MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
484	-	R1191N084B	LVR-IC	LDO, 8.4V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
484	eb	XC6404AA84M	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
484	ej	XC6105B435MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
485	-	R1191N085B	LVR-IC	LDO, 8.5V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
485	eb	XC6404AA85M	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
485	ej	XC6105B436MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
486	-	R1191N086B	LVR-IC	LDO, 8.6V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
486	eb	XC6404AA86M	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
486	ej	XC6105B437MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
487	-	R1191N087B	LVR-IC	LDO, 8.7V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
487	eb	XC6404AA87M	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
487	ej	XC6105B438MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
488	-	R1191N088B	LVR-IC	LDO, 8.8V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
488	eb	XC6404AA88M	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE, PDR	SOT-25	28hg	VR15	6g	Tor
488	ej	XC6105B439MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
489	-	R1191N089B	LVR-IC	LDO, 8.9V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
489	ej	XC6105B440MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48A	-	AAT60048A-S5	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
48A	-	AP6233S-15NHFGP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48A	-	AP6233S-15NHFPP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
48A	eb	AP6233S-15NHFGA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48A	eb	AP6233S-15NHFPA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, CL	SOT-25	28cx	VR4	6kb	Anw
48A	ec	AP6233S-15NHFGA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48A	ec	AP6233S-15NHFPA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
48A	eh	AP6233S-15NHFGP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48A	eh	AP6233S-15NHFPP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
48A	ej	XC6105B441MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48B	-	AAT60048B-S5	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
48B	-	AP6233S-15NLFGP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48B	-	AP6233S-15NLFPP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
48B	eb	AP6233S-15NLFGA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48B	eb	AP6233S-15NLFPA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
48B	ec	AP6233S-15NLFGA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48B	ec	AP6233S-15NLFPA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
48B	eh	AP6233S-15NLFGP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48B	eh	AP6233S-15NLFPP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
48B	ej	XC6105B442MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48C	-	AAT60048C-S5	Vdet-IC	4.8V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
48C	-	AP6233S-15NHNGP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48C	-	AP6233S-15NHNPP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
48C	eb	AP6233S-15NHNGA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48C	eb	AP6233S-15NHNPA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
48C	ec	AP6233S-15NHNGA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48C	ec	AP6233S-15NHNPA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
48C	eh	AP6233S-15NHNGP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48C	eh	AP6233S-15NHNPP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
48C	ej	XC6105B443MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48D	-	AAT60048D-S5	Vdet-IC	4.8V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
48D	-	AP6233S-15NLNGP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48D	-	AP6233S-15NLNPP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
48D	eb	AP6233S-15NLNGA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48D	eb	AP6233S-15NLNPA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
48D	ec	AP6233S-15NLNGA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48D	ec	AP6233S-15NLNPA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
48D	eh	AP6233S-15NLNGP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48D	eh	AP6233S-15NLNPP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
48D	ej	XC6105B444MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48E	-	AP6233S-15UHFGP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48E	-	AP6233S-15UHFPP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
48E	eb	AP6233S-15UHFGA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48E	eb	AP6233S-15UHFPA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
48E	ec	AP6233S-15UHFGA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48E	ec	AP6233S-15UHFPA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
48E	eh	AP6233S-15UHFGP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48E	eh	AP6233S-15UHFPP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
48E	ej	XC6105B445MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48F	-	AP6233S-15ULFGP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
48F	-	AP6233S-15ULFPP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
48F	eb	AP6233S-15ULFGA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48F	eb	AP6233S-15ULFPA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
48F	ec	AP6233S-15ULFGA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48F	ec	AP6233S-15ULFPA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
48F	ec	XC6105B416MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48F	eh	AP6233S-15ULFGP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48F	eh	AP6233S-15ULFPP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
48F	ej	XC6105B446MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48G	-	AP6233S-15UHNGP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48G	-	AP6233S-15UHNPP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
48G	eb	AP6233S-15UHNGA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48G	eb	AP6233S-15UHNPA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
48G	ec	AP6233S-15UHNGA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48G	ec	AP6233S-15UHNPA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
48G	eh	AP6233S-15UHNGP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48G	eh	AP6233S-15UHNPP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
48H	-	AP6233S-15ULNGP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48H	-	AP6233S-15ULNPP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
48H	eb	AP6233S-15ULNGA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48H	eb	AP6233S-15ULNPA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
48H	ec	AP6233S-15ULNGA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48H	ec	AP6233S-15ULNPA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
48H	ec	XC6105B417MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48H	eh	AP6233S-15ULNGP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48H	eh	AP6233S-15ULNPP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
48H	ej	XC6105B447MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48J	-	AP6233S-15DHFGP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48J	-	AP6233S-15DHFPP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
48J	eb	AP6233S-15DHFGA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48J	eb	AP6233S-15DHFPA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
48J	ec	AP6233S-15DHFGA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48J	ec	AP6233S-15DHFPA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
48J	eh	AP6233S-15DHFGP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48J	eh	AP6233S-15DHFPP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
48K	-	AP6233S-15DLFGP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48K	-	AP6233S-15DLFPP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
48K	-	TK71748S	LVR-IC	LDO, 4.8V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
48K	eb	AP6233S-15DLFGA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48K	eb	AP6233S-15DLFPA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
48K	ec	AP6233S-15DLFGA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48K	ec	AP6233S-15DLFPA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
48K	ec	XC6105B418MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48K	eh	AP6233S-15DLFGP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48K	eh	AP6233S-15DLFPP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
48K	ej	XC6105B448MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48L	-	AP6233S-15DHNGP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48L	-	AP6233S-15DHNPP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
48L	-	TK71648ASCL	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
48L	eb	AP6233S-15DHNGA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48L	eb	AP6233S-15DHNPA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
48L	ec	AP6233S-15DHNGA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48L	ec	AP6233S-15DHNPA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
48L	ec	XC6105B419MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48L	eh	AP6233S-15DHNGP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48L	eh	AP6233S-15DHNPP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
48L	ej	XC6105B449MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48M	-	AP6233S-15DLNGP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48M	-	AP6233S-15DLNPP	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
48M	eb	AP6233S-15DLNGA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48M	eb	AP6233S-15DLNPA	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
48M	ec	AP6233S-15DLNGA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
48M	ec	AP6233S-15DLNPA1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
48M	ec	XC6105B420MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48M	eh	AP6233S-15DLNGP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
48M	eh	AP6233S-15DLNPP1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
48M	ej	XC6105B450MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48N	-	XC9140A261MR-G	DC-DC-IC	PWM step-up, 2.6V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
48N	ec	XC6105B421MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48P	-	XC9140A431MR-G	DC-DC-IC	PWM step-up, 4.3V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
48P	ec	XC6105B422MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48R	ec	XC6105B423MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48S	ec	XC6105B424MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48T	-	TK71448S	LVR-IC	LDO, 4.8V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
48T	-	XC9140C261MR-G	DC-DC-IC	PWM step-up, 2.6V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
48T	ec	XC6105B425MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48U	-	XC9140C431MR-G	DC-DC-IC	PWM step-up, 4.3V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
48U	ec	XC6105B426MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48V	ec	XC6105B427MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48X	ec	XC6105B428MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48Y	ec	XC6105B429MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
48Z	ec	XC6105B430MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49	-	R1223N382C	DC-DC-IC	PWM step-down, +CE, 3.8V±2%, 300kHz, Latch-prot.	SOT-23-5	28ud	DC7	6g	Ric
49	-	RN5RF49AA	LVR-IC	LRip, -CE, 4.9V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
49	-	RN5RZ49AA	LVR-IC	LDO, LN, 4.9V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
49	-	XC62EP4902MR-G	LVR-IC	LDO, boosted, 4.9V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
49	ea	XC62ER4902MR-G	LVR-IC	LDO, boosted, 4.9V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
49-	-	XC62HR4902MR-G	LVR-IC	LDO, 4.9V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
490	-	R1191N090B	LVR-IC	LDO, 9.0V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
490	ej	XC6105B531MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
490AC	-	BL8509-490ACRN	Vdet-IC	4.9V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
490AC	-	LC9009CB5TR490AC	Vdet-IC	4.9V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
490AN	-	BL8509-490ANRN	Vdet-IC	4.9V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
490AN	-	LC9009CB5TR490AN	Vdet-IC	4.9V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
490BC	-	BL8509-490BCRN	Vdet-IC	4.9V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
490BC	-	LC9009CB5TR490BC	Vdet-IC	4.9V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
490BN	-	BL8509-490BNRN	Vdet-IC	4.9V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
490BN	-	LC9009CB5TR490BN	Vdet-IC	4.9V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
490CC	-	BL8509-490CCRN	Vdet-IC	4.9V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
490CC	-	LC9009CB5TR490CC	Vdet-IC	4.9V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
490CN	-	BL8509-490CNRN	Vdet-IC	4.9V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
490CN	-	LC9009CB5TR490CN	Vdet-IC	4.9V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
490DC	-	BL8509-490DCRN	Vdet-IC	4.9V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
490DC	-	LC9009CB5TR490DC	Vdet-IC	4.9V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
490DN	-	BL8509-490DNRN	Vdet-IC	4.9V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
490DN	-	LC9009CB5TR490DN	Vdet-IC	4.9V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
490EC	-	BL8509-490ECRN	Vdet-IC	4.9V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
490EC	-	LC9009CB5TR490EC	Vdet-IC	4.9V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
490EN	-	BL8509-490ENRN	Vdet-IC	4.9V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
490EN	-	LC9009CB5TR490EN	Vdet-IC	4.9V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
490FC	-	BL8509-490FCRN	Vdet-IC	4.9V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
490FC	-	LC9009CB5TR490FC	Vdet-IC	4.9V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
490FN	-	BL8509-490FNRN	Vdet-IC	4.9V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
490FN	-	LC9009CB5TR490FN	Vdet-IC	4.9V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
490GC	-	BL8509-490GCRN	Vdet-IC	4.9V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
490GC	-	LC9009CB5TR490GC	Vdet-IC	4.9V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
490GN	-	BL8509-490GNRN	Vdet-IC	4.9V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
490GN	-	LC9009CB5TR490GN	Vdet-IC	4.9V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
491	-	R1191N091B	LVR-IC	LDO, 9.1V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
491	ej	XC6105B532MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
492	-	R1191N092B	LVR-IC	LDO, 9.2V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
492	ej	XC6105B533MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
493	-	R1191N093B	LVR-IC	LDO, 9.3V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
493	ej	XC6105B534MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
494	-	R1191N094B	LVR-IC	LDO, 9.4V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
494	ej	XC6105B535MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
495	-	R1191N095B	LVR-IC	LDO, 9.5V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
495	ej	XC6105B536MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
496	-	R1191N096B	LVR-IC	LDO, 9.6V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
496	ej	XC6105B537MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
497	-	R1191N097B	LVR-IC	LDO, 9.7V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
497	ej	XC6105B538MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
498	-	R1191N098B	LVR-IC	LDO, 9.8V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
498	ej	XC6105B539MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
499	-	R1191N099B	LVR-IC	LDO, 9.9V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
499	ej	XC6105B540MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49A	-	AAT60049A-S5	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
49A	ej	XC6105B541MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49B	-	AAT60049B-S5	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
49B	ej	XC6105B542MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
49C	-	AAT60049C-S5	Vdet-IC	4.9V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
49C	ej	XC6105B543MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49D	-	AAT60049D-S5	Vdet-IC	4.9V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
49D	ej	XC6105B544MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49E	ej	XC6105B545MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49F	ec	XC6105B516MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49F	ej	XC6105B546MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49H	ec	XC6105B517MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49H	ej	XC6105B547MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49K	-	TK71749S	LVR-IC	LDO, 4.9V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
49K	ec	XC6105B518MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49K	ej	XC6105B548MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49L	-	TK71649ASCL	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
49L	ec	XC6105B519MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49L	ej	XC6105B549MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49M	ec	XC6105B520MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49M	ej	XC6105B550MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49N	-	XC9140A271MR-G	DC-DC-IC	PWM step-up, 2.7V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
49N	ec	XC6105B521MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49P	-	XC9140A441MR-G	DC-DC-IC	PWM step-up, 4.4V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
49P	ec	XC6105B522MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49R	ec	XC6105B523MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49S	ec	XC6105B524MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49T	-	TK71449S	LVR-IC	LDO, 4.9V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
49T	-	XC9140C271MR-G	DC-DC-IC	PWM step-up, 2.7V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
49T	ec	XC6105B525MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49U	-	XC9140C441MR-G	DC-DC-IC	PWM step-up, 4.4V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
49U	ec	XC6105B526MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49V	ec	XC6105B527MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49X	ec	XC6105B528MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49Y	ec	XC6105B529MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
49Z	ec	XC6105B530MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4A0	-	LN1134A312KR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4A0	-	LN1134A312MR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4A0	-	LN1193A312KR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4A0	-	LN1193A312MR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4A0	-	XC6204A312MR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4A0	ej	XC6105B631MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4A1	-	LN1134A322KR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4A1	-	LN1134A322MR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4A1	-	LN1193A322KR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4A1	-	LN1193A322MR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4A1	-	XC6204A322MR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4A1	ej	XC6105B632MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4A2	-	LN1134A332KR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4A2	-	LN1134A332MR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4A2	-	LN1193A332KR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4A2	-	LN1193A332MR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4A2	-	XC6204A332MR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4A2	ej	XC6105B633MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4A3	-	LN1134A342KR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4A3	-	LN1134A342MR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4A3	-	LN1193A342KR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4A3	-	LN1193A342MR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4A3	-	XC6204A342MR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4A3	ej	XC6105B634MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4A4	-	LN1134A352KR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4A4	-	LN1134A352MR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4A4	-	LN1193A352KR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4A4	-	LN1193A352MR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4A4	-	XC6204A352MR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4A4	ej	XC6105B635MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4A5	-	LN1134A362KR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4A5	-	LN1134A362MR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4A5	-	LN1193A362KR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4A5	-	LN1193A362MR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4A5	-	XC6204A362MR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4A5	ej	XC6105B636MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4A6	-	LN1134A372KR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4A6	-	LN1134A372MR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4A6	-	LN1193A372KR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4A6	-	LN1193A372MR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4A6	-	XC6204A372MR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4A6	ej	XC6105B637MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4A7	-	LN1134A382KR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4A7	-	LN1134A382MR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4A7	-	LN1193A382KR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4A7	-	LN1193A382MR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4A7	-	LN1234A08AKR	LVR-IC	LDO, 0.85V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4A7	-	LN1234A08AMR	LVR-IC	LDO, 0.85V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4A7	-	XC6204A382MR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4A7	ej	XC6105B638MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4A8	-	LN1134A392KR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4A8	-	LN1134A392MR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4A8	-	LN1193A392KR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4A8	-	LN1193A392MR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4A8	-	LN1234A09AKR	LVR-IC	LDO, 0.95V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4A8	-	LN1234A09AMR	LVR-IC	LDO, 0.95V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4A8	-	XC6204A392MR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4A8	-	XC9235A08CMR-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4A8	ej	XC6105B639MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4A9	-	LN1134A402KR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4A9	-	LN1134A402MR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4A9	-	LN1193A402KR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4A9	-	LN1193A402MR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4A9	-	LN1234A10AKR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4A9	-	LN1234A10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4A9	-	XC6204A402MR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4A9	-	XC9235A09CMR-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4A9	ej	XC6105B640MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AA	-	AP6233S-18NHFGP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AA	-	AP6233S-18NHFPP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4AA	-	LN1134A412KR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AA	-	LN1134A412MR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AA	-	LN1193A412KR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AA	-	LN1193A412MR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AA	-	LN1234A11AKR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AA	-	LN1234A11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AA	-	XC6204A412MR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AA	eb	AP6233S-18NHFGA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AA	eb	AP6233S-18NHFPA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
4AA	ec	AP6233S-18NHFGA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AA	ec	AP6233S-18NHFPA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
4AA	eh	AP6233S-18NHFGP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AA	eh	AP6233S-18NHFPP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4AA	ej	XC6105B641MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AB	-	AP6233S-18NLFGP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AB	-	AP6233S-18NLFPP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4AB	-	LN1134A422KR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AB	-	LN1134A422MR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AB	-	LN1193A422KR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AB	-	LN1193A422MR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AB	-	LN1234A12AKR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AB	-	LN1234A12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AB	-	XC6204A422MR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AB	eb	AP6233S-18NLFGA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AB	eb	AP6233S-18NLFPA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
4AB	ec	AP6233S-18NLFGA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AB	ec	AP6233S-18NLFPA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
4AB	eh	AP6233S-18NLFGP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AB	eh	AP6233S-18NLFPP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4AB	ej	XC6105B642MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AC	-	AP6233S-18NHNGP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AC	-	AP6233S-18NHNPP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
4AC	-	LN1134A432KR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AC	-	LN1134A432MR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AC	-	LN1193A432KR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AC	-	LN1193A432MR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AC	-	LN1234A13AKR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AC	-	LN1234A13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4AC	-	XC6204A432MR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AC	eb	AP6233S-18NHNGA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AC	eb	AP6233S-18NHNPA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
4AC	ec	AP6233S-18NHNGA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AC	ec	AP6233S-18NHNPA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
4AC	eh	AP6233S-18NHNGP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AC	eh	AP6233S-18NHNPP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
4AC	ej	XC6105B643MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AD	-	AP6233S-18NLNGP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AD	-	AP6233S-18NLNPP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
4AD	-	LN1134A442KR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AD	-	LN1134A442MR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AD	-	LN1193A442KR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AD	-	LN1193A442MR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AD	-	LN1234A14AKR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AD	-	LN1234A14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AD	-	XC6204A442MR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AD	eb	AP6233S-18NLNGA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AD	eb	AP6233S-18NLNPA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
4AD	ec	AP6233S-18NLNGA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AD	ec	AP6233S-18NLNPA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
4AD	eh	AP6233S-18NLNGP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AD	eh	AP6233S-18NLNPP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
4AD	ej	XC6105B644MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AE	-	AP6233S-18UHFGP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AE	-	AP6233S-18UHFPP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4AE	-	LN1134A452KR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AE	-	LN1134A452MR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AE	-	LN1193A452KR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AE	-	LN1193A452MR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AE	-	LN1234A15AKR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AE	-	LN1234A15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AE	-	XC6204A452MR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AE	eb	AP6233S-18UHFGA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AE	eb	AP6233S-18UHFPA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4AE	ec	AP6233S-18UHFGA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AE	ec	AP6233S-18UHFPA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4AE	eh	AP6233S-18UHFGP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AE	eh	AP6233S-18UHFPP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4AE	ej	XC6105B645MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AF	-	AP6233S-18ULFGP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AF	-	AP6233S-18ULFPP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4AF	-	LN1134A462KR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AF	-	LN1134A462MR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AF	-	LN1193A462KR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AF	-	LN1193A462MR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AF	-	LN1234A16AKR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AF	-	LN1234A16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AF	-	XC6204A462MR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AF	eb	AP6233S-18ULFGA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AF	eb	AP6233S-18ULFPA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4AF	ec	AP6233S-18ULFGA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AF	ec	AP6233S-18ULFPA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4AF	ec	XC6105B616MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AF	eh	AP6233S-18ULFGP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AF	eh	AP6233S-18ULFPP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4AF	ej	XC6105B646MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AG	-	AP6233S-18UHNGP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AG	-	AP6233S-18UHNPP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4AG	eb	AP6233S-18UHNGA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AG	eb	AP6233S-18UHNPA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4AG	ec	AP6233S-18UHNGA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AG	ec	AP6233S-18UHNPA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4AG	eh	AP6233S-18UHNGP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AG	eh	AP6233S-18UHNPP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4AH	-	AP6233S-18ULNGP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AH	-	AP6233S-18ULNPP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4AH	-	LN1134A472KR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AH	-	LN1134A472MR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AH	-	LN1193A472KR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4AH	-	LN1193A472MR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AH	-	LN1234A17AKR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AH	-	LN1234A17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AH	-	XC6204A472MR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AH	eb	AP6233S-18ULNGA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AH	eb	AP6233S-18ULNPA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4AH	ec	AP6233S-18ULNGA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AH	ec	AP6233S-18ULNPA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4AH	ec	XC6105B617MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AH	eh	AP6233S-18ULNGP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AH	eh	AP6233S-18ULNPP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4AH	ej	XC6105B647MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AJ	-	AP6233S-18DHFGP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AJ	-	AP6233S-18DHFPP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4AJ	eb	AP6233S-18DHFGA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AJ	eb	AP6233S-18DHFPA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4AJ	ec	AP6233S-18DHFGA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AJ	ec	AP6233S-18DHFPA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4AJ	eh	AP6233S-18DHFGP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AJ	eh	AP6233S-18DHFPP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4AK	-	AP6233S-18DLFGP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AK	-	AP6233S-18DLFPP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4AK	-	LN1134A482KR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AK	-	LN1134A482MR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AK	-	LN1193A482KR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AK	-	LN1193A482MR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AK	-	XC6204A482MR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AK	eb	AP6233S-18DLFGA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AK	eb	AP6233S-18DLFPA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4AK	ec	AP6233S-18DLFGA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AK	ec	AP6233S-18DLFPA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4AK	ec	XC6105B618MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AK	eh	AP6233S-18DLFGP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AK	eh	AP6233S-18DLFPP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4AK	ej	XC6105B648MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AL	-	AP6233S-18DHNGP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AL	-	AP6233S-18DHNPP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4AL	-	LN1134A492KR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AL	-	LN1134A492MR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AL	-	LN1193A492KR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AL	-	LN1193A492MR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AL	-	XC6204A492MR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AL	-	XC9235A0LCMR-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4AL	eb	AP6233S-18DHNGA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AL	eb	AP6233S-18DHNPA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4AL	ec	AP6233S-18DHNGA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AL	ec	AP6233S-18DHNPA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4AL	ec	XC6105B619MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AL	eh	AP6233S-18DHNGP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AL	eh	AP6233S-18DHNPP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4AL	ej	XC6105B649MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AM	-	AP6233S-18DLNGP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AM	-	AP6233S-18DLNPP	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4AM	-	LN1134A502KR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AM	-	LN1134A502MR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AM	-	LN1193A502KR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AM	-	LN1193A502MR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AM	-	XC6204A502MR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AM	-	XC9235A0MCMR-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4AM	eb	AP6233S-18DLNGA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AM	eb	AP6233S-18DLNPA	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4AM	ec	AP6233S-18DLNGA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4AM	ec	AP6233S-18DLNPA1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4AM	ec	XC6105B620MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AM	eh	AP6233S-18DLNGP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4AM	eh	AP6233S-18DLNPP1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4AM	ej	XC6105B650MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AN	-	LN1134A512KR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AN	-	LN1134A512MR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AN	-	LN1193A512KR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4AN	-	LN1193A512MR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AN	-	XC6204A512MR	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AN	-	XC9140A281MR-G	DC-DC-IC	PWM step-up, 2.8V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
4AN	ec	XC6105B621MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AP	-	LN1134A522KR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AP	-	LN1134A522MR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AP	-	LN1193A522KR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AP	-	LN1193A522MR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AP	-	XC6204A522MR	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AP	-	XC9140A451MR-G	DC-DC-IC	PWM step-up, 4.5V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
4AP	ec	XC6105B622MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AR	-	LN1134A532KR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AR	-	LN1134A532MR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AR	-	LN1193A532KR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AR	-	LN1193A532MR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AR	-	XC6204A532MR	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AR	ec	XC6105B623MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AS	-	LN1134A542KR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AS	-	LN1134A542MR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AS	-	LN1193A542KR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AS	-	LN1193A542MR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AS	-	XC6204A542MR	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AS	ec	XC6105B624MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AT	-	LN1134A552KR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AT	-	LN1134A552MR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AT	-	LN1193A552KR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AT	-	LN1193A552MR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AT	-	XC6204A552MR	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AT	-	XC9140C281MR-G	DC-DC-IC	PWM step-up, 2.8V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
4AT	ec	XC6105B625MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AU	-	LN1134A562KR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AU	-	LN1134A562MR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AU	-	LN1193A562KR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AU	-	LN1193A562MR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AU	-	XC6204A562MR	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AU	-	XC9140C451MR-G	DC-DC-IC	PWM step-up, 4.5V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
4AU	ec	XC6105B626MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AV	-	LN1134A572KR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AV	-	LN1134A572MR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AV	-	LN1193A572KR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AV	-	LN1193A572MR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AV	-	XC6204A572MR	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AV	ec	XC6105B627MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AX	-	LN1134A582KR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AX	-	LN1134A582MR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AX	-	LN1193A582KR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AX	-	LN1193A582MR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AX	-	XC6204A582MR	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AX	ec	XC6105B628MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AY	-	LN1134A592KR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AY	-	LN1134A592MR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AY	-	LN1193A592KR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AY	-	LN1193A592MR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AY	-	XC6204A592MR	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AY	ec	XC6105B629MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4AZ	-	LN1134A602KR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4AZ	-	LN1134A602MR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4AZ	-	LN1193A602KR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4AZ	-	LN1193A602MR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4AZ	-	XC6204A602MR	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4AZ	ec	XC6105B630MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
4B	-	R3111N141A	Vdet-IC	1.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
4B	-	RN5RL24AA	LVR-IC	2.4V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
4B	eu	RN5VD14CA	Vdet-IC	1.4V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
4B0	-	LN1134B312KR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4B0	-	LN1134B312MR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4B0	-	LN1193B312KR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4B0	-	LN1193B312MR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4B0	-	TAR5SB40	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
4B0	-	XC6204B312MR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4B0	-	XC9235A10CMR-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4B0	ej	XC6105C231MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4B1	-	LN1134B322KR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4B1	-	LN1134B322MR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4B1	-	LN1193B322KR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4B1	-	LN1193B322MR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4B1	-	TAR5SB41	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
4B1	-	XC6204B322MR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4B1	-	XC9235A11CMR-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4B1	ej	XC6105C232MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4B2	-	LN1134B332KR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4B2	-	LN1134B332MR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4B2	-	LN1193B332KR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4B2	-	LN1193B332MR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4B2	-	TAR5SB42	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
4B2	-	XC6204B332MR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4B2	-	XC9235A12CMR-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4B2	ej	XC6105C233MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4B3	-	LN1134B342KR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4B3	-	LN1134B342MR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4B3	-	LN1193B342KR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4B3	-	LN1193B342MR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4B3	-	TAR5SB43	LVR-IC	LDO, 4.3V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
4B3	-	XC6204B342MR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4B3	-	XC9235A13CMR-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4B3	ej	XC6105C234MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4B4	-	LN1134B352KR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4B4	-	LN1134B352MR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4B4	-	LN1193B352KR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4B4	-	LN1193B352MR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4B4	-	TAR5SB44	LVR-IC	LDO, 4.4V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
4B4	-	XC6204B352MR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4B4	-	XC9235A14CMR-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4B4	ej	XC6105C235MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4B5	-	LN1134B362KR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4B5	-	LN1134B362MR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4B5	-	LN1193B362KR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4B5	-	LN1193B362MR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4B5	-	TAR5SB45	LVR-IC	LDO, 4.5V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
4B5	-	XC6204B362MR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4B5	-	XC9235A15CMR-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4B5	ej	XC6105C236MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4B6	-	LN1134B372KR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4B6	-	LN1134B372MR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4B6	-	LN1193B372KR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4B6	-	LN1193B372MR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4B6	-	TAR5SB46	LVR-IC	LDO, 4.6V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
4B6	-	XC6204B372MR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4B6	-	XC9235A16CMR-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4B6	ej	XC6105C237MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4B7	-	LN1134B382KR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4B7	-	LN1134B382MR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4B7	-	LN1193B382KR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4B7	-	LN1193B382MR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4B7	-	LN1234B08AKR	LVR-IC	LDO, 0.85V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4B7	-	LN1234B08AMR	LVR-IC	LDO, 0.85V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4B7	-	TAR5SB47	LVR-IC	LDO, 4.7V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
4B7	-	XC6204B382MR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4B7	-	XC9235A17CMR-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4B7	ej	XC6105C238MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4B8	-	LN1134B392KR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4B8	-	LN1134B392MR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4B8	-	LN1193B392KR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4B8	-	LN1193B392MR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4B8	-	LN1234B09AKR	LVR-IC	LDO, 0.95V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4B8	-	LN1234B09AMR	LVR-IC	LDO, 0.95V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4B8	-	TAR5SB48	LVR-IC	LDO, 4.8V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
4B8	-	XC6204B392MR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4B8	-	XC9235A18CMR-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4B8	ej	XC6105C239MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4B9	-	LN1134B402KR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4B9	-	LN1134B402MR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4B9	-	LN1193B402KR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4B9	-	LN1193B402MR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4B9	-	LN1234B10AKR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4B9	-	LN1234B10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4B9	-	TAR5SB49	LVR-IC	LDO, 4.9V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
4B9	-	XC6204B402MR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4B9	-	XC9235A19CMR-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4B9	ej	XC6105C240MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BA	-	LN1134B412KR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BA	-	LN1134B412MR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BA	-	LN1193B412KR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BA	-	LN1193B412MR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BA	-	LN1234B11AKR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BA	-	LN1234B11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BA	-	XC6204B412MR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BA	-	XC9235A1ACMR-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4BA	ej	XC6105C241MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BB	-	LN1134B422KR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BB	-	LN1134B422MR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BB	-	LN1193B422KR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BB	-	LN1193B422MR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BB	-	LN1234B12AKR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BB	-	LN1234B12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BB	-	XC6204B422MR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BB	-	XC9235A1BCMR-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4BB	ej	XC6105C242MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BC	-	LN1134B432KR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BC	-	LN1134B432MR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BC	-	LN1193B432KR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BC	-	LN1193B432MR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BC	-	LN1234B13AKR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BC	-	LN1234B13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BC	-	XC6204B432MR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BC	-	XC9235A1CCMR-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4BC	ej	XC6105C243MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BD	-	LN1134B442KR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BD	-	LN1134B442MR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BD	-	LN1193B442KR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BD	-	LN1193B442MR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BD	-	LN1234B14AKR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BD	-	LN1234B14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BD	-	XC6204B442MR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BD	-	XC9235A1DCMR-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4BD	ej	XC6105C244MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BE	-	LN1134B452KR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BE	-	LN1134B452MR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BE	-	LN1193B452KR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BE	-	LN1193B452MR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BE	-	LN1234B15AKR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BE	-	LN1234B15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BE	-	XC6204B452MR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BE	-	XC9235A1ECMR-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4BE	ej	XC6105C245MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BF	-	LN1134B462KR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BF	-	LN1134B462MR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BF	-	LN1193B462KR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BF	-	LN1193B462MR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BF	-	LN1234B16AKR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BF	-	LN1234B16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BF	-	XC6204B462MR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BF	-	XC9235A1FCMR-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4BF	ec	XC6105C216MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BF	ej	XC6105C246MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BH	-	LN1134B472KR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BH	-	LN1134B472MR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BH	-	LN1193B472KR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BH	-	LN1193B472MR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BH	-	LN1234B17AKR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4BH	-	LN1234B17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BH	-	XC6204B472MR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BH	-	XC9235A1HCMR-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4BH	ec	XC6105C217MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BH	ej	XC6105C247MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BK	-	LN1134B482KR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BK	-	LN1134B482MR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BK	-	LN1193B482KR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BK	-	LN1193B482MR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BK	-	XC6204B482MR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BK	-	XC9235A1KCMR-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4BK	ec	XC6105C218MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BK	ej	XC6105C248MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BL	-	LN1134B492KR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BL	-	LN1134B492MR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BL	-	LN1193B492KR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BL	-	LN1193B492MR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BL	-	XC6204B492MR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BL	-	XC9235A1LCMR-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4BL	ec	XC6105C219MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BL	ej	XC6105C249MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BM	-	LN1134B502KR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BM	-	LN1134B502MR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BM	-	LN1193B502KR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BM	-	LN1193B502MR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BM	-	XC6204B502MR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BM	-	XC9235A1MCMR-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4BM	ec	XC6105C220MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BM	ej	XC6105C250MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BN	-	LN1134B512KR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BN	-	LN1134B512MR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BN	-	LN1193B512KR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BN	-	LN1193B512MR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BN	-	XC6204B512MR	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BN	-	XC9140A291MR-G	DC-DC-IC	PWM step-up, 2.9V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
4BN	ec	XC6105C221MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BP	-	LN1134B522KR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BP	-	LN1134B522MR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BP	-	LN1193B522KR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BP	-	LN1193B522MR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BP	-	XC6204B522MR	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BP	-	XC9140A461MR-G	DC-DC-IC	PWM step-up, 4.6V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
4BP	ec	XC6105C222MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BR	-	LN1134B532KR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BR	-	LN1134B532MR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BR	-	LN1193B532KR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BR	-	LN1193B532MR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BR	-	XC6204B532MR	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BR	ec	XC6105C223MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BS	-	LN1134B542KR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BS	-	LN1134B542MR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BS	-	LN1193B542KR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BS	-	LN1193B542MR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BS	-	XC6204B542MR	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BS	ec	XC6105C224MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BT	-	LN1134B552KR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BT	-	LN1134B552MR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BT	-	LN1193B552KR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BT	-	LN1193B552MR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BT	-	XC6204B552MR	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BT	-	XC9140C291MR-G	DC-DC-IC	PWM step-up, 2.9V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
4BT	ec	XC6105C225MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BU	-	LN1134B562KR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BU	-	LN1134B562MR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BU	-	LN1193B562KR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BU	-	LN1193B562MR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BU	-	XC6204B562MR	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BU	-	XC9140C461MR-G	DC-DC-IC	PWM step-up, 4.6V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
4BU	ec	XC6105C226MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BV	-	LN1134B572KR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4BV	-	LN1134B572MR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BV	-	LN1193B572KR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BV	-	LN1193B572MR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BV	-	XC6204B572MR	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BV	ec	XC6105C227MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BX	-	LN1134B582KR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BX	-	LN1134B582MR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BX	-	LN1193B582KR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BX	-	LN1193B582MR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BX	-	XC6204B582MR	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BX	ec	XC6105C228MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BY	-	LN1134B592KR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BY	-	LN1134B592MR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BY	-	LN1193B592KR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BY	-	LN1193B592MR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BY	-	XC6204B592MR	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BY	ec	XC6105C229MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4BZ	-	LN1134B602KR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4BZ	-	LN1134B602MR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4BZ	-	LN1193B602KR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4BZ	-	LN1193B602MR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4BZ	-	XC6204B602MR	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4BZ	ec	XC6105C230MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4C	-	R3111N241A	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
4C	-	RN5RL34AA	LVR-IC	3.4V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
4C	eu	RN5VD24CA	Vdet-IC	2.4V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
4C0	-	LN1134C312KR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4C0	-	LN1134C312MR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4C0	-	LN1193C312KR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4C0	-	LN1193C312MR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4C0	-	XC6204C312MR	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4C0	-	XC9235A20CMR-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4C0	ej	XC6105C331MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4C1	-	LN1134C322KR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4C1	-	LN1134C322MR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4C1	-	LN1193C322KR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4C1	-	LN1193C322MR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4C1	-	XC6204C322MR	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4C1	-	XC9235A21CMR-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4C1	ej	XC6105C332MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4C2	-	LN1134C332KR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4C2	-	LN1134C332MR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4C2	-	LN1193C332KR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4C2	-	LN1193C332MR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4C2	-	XC6204C332MR	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4C2	-	XC9235A22CMR-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4C2	ej	XC6105C333MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4C3	-	LN1134C342KR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4C3	-	LN1134C342MR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4C3	-	LN1193C342KR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4C3	-	LN1193C342MR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4C3	-	XC6204C342MR	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4C3	-	XC9235A23CMR-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4C3	ej	XC6105C334MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4C4	-	LN1134C352KR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4C4	-	LN1134C352MR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4C4	-	LN1193C352KR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4C4	-	LN1193C352MR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4C4	-	XC6204C352MR	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4C4	-	XC9235A24CMR-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4C4	ej	XC6105C335MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4C5	-	LN1134C362KR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4C5	-	LN1134C362MR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4C5	-	LN1193C362KR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4C5	-	LN1193C362MR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4C5	-	XC6204C362MR	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4C5	-	XC9235A25CMR-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4C5	ej	XC6105C336MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4C6	-	LN1134C372KR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4C6	-	LN1134C372MR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4C6	-	LN1193C372KR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4C6	-	LN1193C372MR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4C6	-	XC6204C372MR	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4C6	-	XC9235A26CMR-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4C6	ej	XC6105C337MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4C7	-	LN1134C382KR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4C7	-	LN1134C382MR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4C7	-	LN1193C382KR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4C7	-	LN1193C382MR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4C7	-	LN1234C08AKR	LVR-IC	LDO, 0.85V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4C7	-	LN1234C08AMR	LVR-IC	LDO, 0.85V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4C7	-	XC6204C382MR	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4C7	-	XC9235A27CMR-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4C7	ej	XC6105C338MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4C8	-	LN1134C392KR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4C8	-	LN1134C392MR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4C8	-	LN1193C392KR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4C8	-	LN1193C392MR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4C8	-	LN1234C09AKR	LVR-IC	LDO, 0.95V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4C8	-	LN1234C09AMR	LVR-IC	LDO, 0.95V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4C8	-	XC6204C392MR	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4C8	-	XC9235A28CMR-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4C8	ej	XC6105C339MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4C9	-	LN1134C402KR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4C9	-	LN1134C402MR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4C9	-	LN1193C402KR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4C9	-	LN1193C402MR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4C9	-	LN1234C10AKR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4C9	-	LN1234C10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4C9	-	XC6204C402MR	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4C9	-	XC9235A29CMR-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4C9	ej	XC6105C340MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CA	-	LN1134C412KR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CA	-	LN1134C412MR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CA	-	LN1193C412KR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CA	-	LN1193C412MR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CA	-	LN1234C11AKR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CA	-	LN1234C11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CA	-	XC6204C412MR	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CA	-	XC9235A2ACMR-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4CA	ej	XC6105C341MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CB	-	LN1134C422KR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CB	-	LN1134C422MR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CB	-	LN1193C422KR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CB	-	LN1193C422MR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CB	-	LN1234C12AKR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CB	-	LN1234C12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CB	-	XC6204C422MR	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CB	-	XC9235A2BCMR-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4CB	ej	XC6105C342MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CC	-	LN1134C432KR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CC	-	LN1134C432MR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CC	-	LN1193C432KR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CC	-	LN1193C432MR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CC	-	LN1234C13AKR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CC	-	LN1234C13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CC	-	XC6204C432MR	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CC	-	XC9235A2CCMR-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4CC	ej	XC6105C343MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CD	-	LN1134C442KR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CD	-	LN1134C442MR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CD	-	LN1193C442KR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CD	-	LN1193C442MR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CD	-	LN1234C14AKR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CD	-	LN1234C14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CD	-	XC6204C442MR	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CD	-	XC9235A2DCMR-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4CD	ej	XC6105C344MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CE	-	LN1134C452KR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CE	-	LN1134C452MR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4CE	-	LN1193C452KR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CE	-	LN1193C452MR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CE	-	LN1234C15AKR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CE	-	LN1234C15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CE	-	XC6204C452MR	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CE	-	XC9235A2ECMR-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4CE	ej	XC6105C345MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CF	-	LN1134C462KR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CF	-	LN1134C462MR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CF	-	LN1193C462KR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CF	-	LN1193C462MR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CF	-	LN1234C16AKR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CF	-	LN1234C16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CF	-	XC6204C462MR	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CF	-	XC9235A2FCMR-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4CF	ec	XC6105C316MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CF	ej	XC6105C346MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CH	-	LN1134C472KR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CH	-	LN1134C472MR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CH	-	LN1193C472KR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CH	-	LN1193C472MR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CH	-	LN1234C17AKR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CH	-	LN1234C17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CH	-	XC6204C472MR	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CH	-	XC9235A2HCMR-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4CH	ec	XC6105C317MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CH	ej	XC6105C347MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CK	-	LN1134C482KR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CK	-	LN1134C482MR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CK	-	LN1193C482KR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CK	-	LN1193C482MR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CK	-	XC6204C482MR	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CK	-	XC9235A2KCMR-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4CK	ec	XC6105C318MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CK	ej	XC6105C348MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CL	-	LN1134C492KR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CL	-	LN1134C492MR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CL	-	LN1193C492KR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CL	-	LN1193C492MR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CL	-	XC6204C492MR	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CL	-	XC9235A2LCMR-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4CL	ec	XC6105C319MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CL	ej	XC6105C349MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CM	-	LN1134C502KR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CM	-	LN1134C502MR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CM	-	LN1193C502KR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CM	-	LN1193C502MR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CM	-	XC6204C502MR	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CM	-	XC9235A2MCMR-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4CM	ec	XC6105C320MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CM	ej	XC6105C350MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CN	-	LN1134C512KR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CN	-	LN1134C512MR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CN	-	LN1193C512KR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CN	-	LN1193C512MR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CN	-	XC6204C512MR	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CN	-	XC9140A301MR-G	DC-DC-IC	PWM step-up, 3.0V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
4CN	ec	XC6105C321MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CP	-	LN1134C522KR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CP	-	LN1134C522MR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CP	-	LN1193C522KR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CP	-	LN1193C522MR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CP	-	XC6204C522MR	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CP	-	XC9140A471MR-G	DC-DC-IC	PWM step-up, 4.7V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
4CP	ec	XC6105C322MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CR	-	LN1134C532KR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CR	-	LN1134C532MR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CR	-	LN1193C532KR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CR	-	LN1193C532MR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CR	-	XC6204C532MR	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4CR	ec	XC6105C323MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CS	-	LN1134C542KR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CS	-	LN1134C542MR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CS	-	LN1193C542KR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CS	-	LN1193C542MR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CS	-	XC6204C542MR	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CS	ec	XC6105C324MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CT	-	LN1134C552KR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CT	-	LN1134C552MR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CT	-	LN1193C552KR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CT	-	LN1193C552MR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CT	-	XC6204C552MR	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CT	-	XC9140C301MR-G	DC-DC-IC	PWM step-up, 3.0V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
4CT	ec	XC6105C325MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CU	-	LN1134C562KR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CU	-	LN1134C562MR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CU	-	LN1193C562KR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CU	-	LN1193C562MR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CU	-	XC6204C562MR	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CU	-	XC9140C471MR-G	DC-DC-IC	PWM step-up, 4.7V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
4CU	ec	XC6105C326MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CV	-	LN1134C572KR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CV	-	LN1134C572MR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CV	-	LN1193C572KR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CV	-	LN1193C572MR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CV	-	XC6204C572MR	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CV	ec	XC6105C327MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CX	-	LN1134C582KR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CX	-	LN1134C582MR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CX	-	LN1193C582KR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CX	-	LN1193C582MR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CX	-	XC6204C582MR	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CX	ec	XC6105C328MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CY	-	LN1134C592KR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CY	-	LN1134C592MR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CY	-	LN1193C592KR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CY	-	LN1193C592MR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CY	-	XC6204C592MR	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CY	ec	XC6105C329MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4CZ	-	LN1134C602KR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4CZ	-	LN1134C602MR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4CZ	-	LN1193C602KR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4CZ	-	LN1193C602MR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4CZ	-	XC6204C602MR	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4CZ	ec	XC6105C330MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4D	-	R3111N341A	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
4D	-	RN5RL44AA	LVR-IC	4.4V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
4D	eu	RN5VD34CA	Vdet-IC	3.4V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
4D0	-	LN1134D312KR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4D0	-	LN1134D312MR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4D0	-	LN1193D312KR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4D0	-	LN1193D312MR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4D0	-	XC6204D312MR	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4D0	-	XC9235A30CMR-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4D0	ej	XC6105C431MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4D1	-	LN1134D322KR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4D1	-	LN1134D322MR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4D1	-	LN1193D322KR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4D1	-	LN1193D322MR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4D1	-	XC6204D322MR	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4D1	-	XC9235A31CMR-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4D1	ej	XC6105C432MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4D2	-	LN1134D332KR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4D2	-	LN1134D332MR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4D2	-	LN1193D332KR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4D2	-	LN1193D332MR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4D2	-	XC6204D332MR	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4D2	-	XC9235A32CMR-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4D2	ej	XC6105C433MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4D3	-	LN1134D342KR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4D3	-	LN1134D342MR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4D3	-	LN1193D342KR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4D3	-	LN1193D342MR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4D3	-	XC6204D342MR	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4D3	-	XC9235A33CMR-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4D3	ej	XC6105C434MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4D4	-	LN1134D352KR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4D4	-	LN1134D352MR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4D4	-	LN1193D352KR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4D4	-	LN1193D352MR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4D4	-	XC6204D352MR	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4D4	-	XC9235A34CMR-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4D4	ej	XC6105C435MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4D5	-	LN1134D362KR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4D5	-	LN1134D362MR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4D5	-	LN1193D362KR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4D5	-	LN1193D362MR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4D5	-	XC6204D362MR	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4D5	-	XC9235A35CMR-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4D5	ej	XC6105C436MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4D6	-	LN1134D372KR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4D6	-	LN1134D372MR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4D6	-	LN1193D372KR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4D6	-	LN1193D372MR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4D6	-	XC6204D372MR	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4D6	-	XC9235A36CMR-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4D6	ej	XC6105C437MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4D7	-	LN1134D382KR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4D7	-	LN1134D382MR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4D7	-	LN1193D382KR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4D7	-	LN1193D382MR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4D7	-	LN1234D08AKR	LVR-IC	LDO, 0.85V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4D7	-	LN1234D08AMR	LVR-IC	LDO, 0.85V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4D7	-	XC6204D382MR	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4D7	-	XC9235A37CMR-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4D7	ej	XC6105C438MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4D8	-	LN1134D392KR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4D8	-	LN1134D392MR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4D8	-	LN1193D392KR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4D8	-	LN1193D392MR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4D8	-	LN1234D09AKR	LVR-IC	LDO, 0.95V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4D8	-	LN1234D09AMR	LVR-IC	LDO, 0.95V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4D8	-	XC6204D392MR	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4D8	-	XC9235A38CMR-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4D8	ej	XC6105C439MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4D9	-	LN1134D402KR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4D9	-	LN1134D402MR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4D9	-	LN1193D402KR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4D9	-	LN1193D402MR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4D9	-	LN1234D10AKR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4D9	-	LN1234D10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4D9	-	XC6204D402MR	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4D9	-	XC9235A39CMR-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4D9	ej	XC6105C440MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DA	-	LN1134D412KR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DA	-	LN1134D412MR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DA	-	LN1193D412KR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DA	-	LN1193D412MR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DA	-	LN1234D11AKR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DA	-	LN1234D11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DA	-	XC6204D412MR	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DA	-	XC9235A3ACMR-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4DA	ej	XC6105C441MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DB	-	LN1134D422KR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DB	-	LN1134D422MR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DB	-	LN1193D422KR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DB	-	LN1193D422MR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DB	-	LN1234D12AKR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DB	-	LN1234D12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DB	-	XC6204D422MR	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4DB	-	XC9235A3BCMR-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4DB	ej	XC6105C442MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DC	-	LN1134D432KR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DC	-	LN1134D432MR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DC	-	LN1193D432KR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DC	-	LN1193D432MR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DC	-	LN1234D13AKR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DC	-	LN1234D13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DC	-	XC6204D432MR	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DC	-	XC9235A3CCMR-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4DC	ej	XC6105C443MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DD	-	LN1134D442KR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DD	-	LN1134D442MR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DD	-	LN1193D442KR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DD	-	LN1193D442MR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DD	-	LN1234D14AKR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DD	-	LN1234D14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DD	-	XC6204D442MR	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DD	-	XC9235A3DCMR-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4DD	ej	XC6105C444MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DE	-	LN1134D452KR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DE	-	LN1134D452MR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DE	-	LN1193D452KR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DE	-	LN1193D452MR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DE	-	LN1234D15AKR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DE	-	LN1234D15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DE	-	XC6204D452MR	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DE	-	XC9235A3ECMR-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4DE	ej	XC6105C445MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DF	-	LN1134D462KR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DF	-	LN1134D462MR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DF	-	LN1193D462KR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DF	-	LN1193D462MR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DF	-	LN1234D16AKR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DF	-	LN1234D16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DF	-	XC6204D462MR	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DF	-	XC9235A3FCMR-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4DF	ec	XC6105C416MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DF	ej	XC6105C446MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DH	-	LN1134D472KR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DH	-	LN1134D472MR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DH	-	LN1193D472KR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DH	-	LN1193D472MR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DH	-	LN1234D17AKR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DH	-	LN1234D17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DH	-	XC6204D472MR	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DH	-	XC9235A3HCMR-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4DH	ec	XC6105C417MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DH	ej	XC6105C447MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DK	-	LN1134D482KR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DK	-	LN1134D482MR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DK	-	LN1193D482KR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DK	-	LN1193D482MR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DK	-	XC6204D482MR	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DK	-	XC9235A3KCMR-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4DK	ec	XC6105C418MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DK	ej	XC6105C448MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DL	-	LN1134D492KR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DL	-	LN1134D492MR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DL	-	LN1193D492KR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DL	-	LN1193D492MR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DL	-	XC6204D492MR	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DL	-	XC9235A3LCMR-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4DL	ec	XC6105C419MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DL	ej	XC6105C449MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DM	-	LN1134D502KR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DM	-	LN1134D502MR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DM	-	LN1193D502KR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DM	-	LN1193D502MR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DM	-	XC6204D502MR	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4DM	-	XC9235A3MCMR-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4DM	ec	XC6105C420MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DM	ej	XC6105C450MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DN	-	LN1134D512KR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DN	-	LN1134D512MR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DN	-	LN1193D512KR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DN	-	LN1193D512MR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DN	-	XC6204D512MR	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DN	-	XC9140A311MR-G	DC-DC-IC	PWM step-up, 3.1V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
4DN	ec	XC6105C421MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DP	-	LN1134D522KR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DP	-	LN1134D522MR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DP	-	LN1193D522KR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DP	-	LN1193D522MR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DP	-	XC6204D522MR	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DP	-	XC9140A481MR-G	DC-DC-IC	PWM step-up, 4.8V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
4DP	ec	XC6105C422MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DR	-	LN1134D532KR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DR	-	LN1134D532MR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DR	-	LN1193D532KR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DR	-	LN1193D532MR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DR	-	XC6204D532MR	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DR	ec	XC6105C423MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DS	-	LN1134D542KR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DS	-	LN1134D542MR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DS	-	LN1193D542KR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DS	-	LN1193D542MR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DS	-	XC6204D542MR	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DS	ec	XC6105C424MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DT	-	LN1134D552KR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DT	-	LN1134D552MR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DT	-	LN1193D552KR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DT	-	LN1193D552MR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DT	-	XC6204D552MR	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DT	-	XC9140C311MR-G	DC-DC-IC	PWM step-up, 3.1V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
4DT	ec	XC6105C425MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DU	-	LN1134D562KR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DU	-	LN1134D562MR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DU	-	LN1193D562KR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DU	-	LN1193D562MR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DU	-	XC6204D562MR	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DU	-	XC9140C481MR-G	DC-DC-IC	PWM step-up, 4.8V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
4DU	ec	XC6105C426MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DV	-	LN1134D572KR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DV	-	LN1134D572MR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DV	-	LN1193D572KR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DV	-	LN1193D572MR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DV	-	XC6204D572MR	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DV	ec	XC6105C427MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DX	-	LN1134D582KR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DX	-	LN1134D582MR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DX	-	LN1193D582KR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DX	-	LN1193D582MR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DX	-	XC6204D582MR	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DX	ec	XC6105C428MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DY	-	LN1134D592KR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DY	-	LN1134D592MR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DY	-	LN1193D592KR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DY	-	LN1193D592MR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DY	-	XC6204D592MR	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DY	ec	XC6105C429MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4DZ	-	LN1134D602KR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4DZ	-	LN1134D602MR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4DZ	-	LN1193D602KR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4DZ	-	LN1193D602MR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4DZ	-	XC6204D602MR	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4DZ	ec	XC6105C430MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4E	-	R3111N441A	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
4E	-	RN5RL54AA	LVR-IC	5.4V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
4E	eu	RN5VD44CA	Vdet-IC	4.4V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4E0	-	XC9235A40CMR-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4E0	ej	XC6105C531MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4E1	ej	XC6105C532MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4E2	ej	XC6105C533MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4E3	ej	XC6105C534MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4E4	ej	XC6105C535MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4E5	ej	XC6105C536MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4E6	ej	XC6105C537MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4E7	ej	XC6105C538MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4E8	ej	XC6105C539MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4E9	-	LN1134A10AKR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4E9	-	LN1134A10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4E9	-	LN1193A10AKR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4E9	-	LN1193A10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4E9	ej	XC6105C540MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EA	-	LN1134A11AKR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4EA	-	LN1134A11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4EA	-	LN1193A11AKR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4EA	-	LN1193A11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4EA	ej	XC6105C541MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EB	-	LN1134A12AKR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4EB	-	LN1134A12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4EB	-	LN1193A12AKR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4EB	-	LN1193A12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4EB	ej	XC6105C542MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EC	-	LN1134A13AKR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4EC	-	LN1134A13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4EC	-	LN1193A13AKR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4EC	-	LN1193A13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4EC	ej	XC6105C543MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4ED	-	LN1134A14AKR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4ED	-	LN1134A14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4ED	-	LN1193A14AKR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4ED	-	LN1193A14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4ED	ej	XC6105C544MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EE	-	LN1134A15AKR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4EE	-	LN1134A15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4EE	-	LN1193A15AKR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4EE	-	LN1193A15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4EE	ej	XC6105C545MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EF	-	LN1134A16AKR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4EF	-	LN1134A16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4EF	-	LN1193A16AKR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4EF	-	LN1193A16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4EF	ec	XC6105C516MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EF	ej	XC6105C546MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EH	-	LN1134A17AKR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4EH	-	LN1134A17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4EH	-	LN1193A17AKR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4EH	-	LN1193A17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4EH	ec	XC6105C517MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EH	ej	XC6105C547MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EK	-	LN1134A18AKR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4EK	-	LN1134A18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4EK	-	LN1193A18AKR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4EK	-	LN1193A18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4EK	-	XC6204A18AMR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4EK	ec	XC6105C518MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EK	ej	XC6105C548MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EL	-	LN1134A19AKR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4EL	-	LN1134A19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4EL	-	LN1193A19AKR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4EL	-	LN1193A19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4EL	-	XC6204A19AMR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4EL	ec	XC6105C519MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EL	ej	XC6105C549MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EM	-	LN1134A20AKR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4EM	-	LN1134A20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4EM	-	LN1193A20AKR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4EM	-	LN1193A20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4EM	-	XC6204A20AMR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4EM	ec	XC6105C520MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EM	ej	XC6105C550MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EN	-	LN1134A21AKR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4EN	-	LN1134A21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4EN	-	LN1193A21AKR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4EN	-	LN1193A21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4EN	-	XC6204A21AMR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4EN	-	XC9140A321MR-G	DC-DC-IC	PWM step-up, 3.2V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
4EN	ec	XC6105C521MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EP	-	LN1134A22AKR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4EP	-	LN1134A22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4EP	-	LN1193A22AKR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4EP	-	LN1193A22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4EP	-	XC6204A22AMR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4EP	-	XC9140A491MR-G	DC-DC-IC	PWM step-up, 4.9V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
4EP	ec	XC6105C522MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4ER	-	LN1134A23AKR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4ER	-	LN1134A23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4ER	-	LN1193A23AKR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4ER	-	LN1193A23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4ER	-	XC6204A23AMR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4ER	ec	XC6105C523MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4ES	-	LN1134A24AKR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4ES	-	LN1134A24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4ES	-	LN1193A24AKR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4ES	-	LN1193A24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4ES	-	XC6204A24AMR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4ES	ec	XC6105C524MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4ET	-	LN1134A25AKR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4ET	-	LN1134A25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4ET	-	LN1193A25AKR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4ET	-	LN1193A25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4ET	-	XC6204A25AMR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4ET	-	XC9140C321MR-G	DC-DC-IC	PWM step-up, 3.2V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
4ET	ec	XC6105C525MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EU	-	LN1134A26AKR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4EU	-	LN1134A26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4EU	-	LN1193A26AKR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4EU	-	LN1193A26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4EU	-	XC6204A26AMR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4EU	-	XC9140C491MR-G	DC-DC-IC	PWM step-up, 4.9V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
4EU	ec	XC6105C526MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EV	-	LN1134A27AKR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4EV	-	LN1134A27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4EV	-	LN1193A27AKR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4EV	-	LN1193A27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4EV	-	XC6204A27AMR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4EV	ec	XC6105C527MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EX	-	LN1134A28AKR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4EX	-	LN1134A28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4EX	-	LN1193A28AKR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4EX	-	LN1193A28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4EX	-	XC6204A28AMR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4EX	ec	XC6105C528MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EY	-	LN1134A29AKR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4EY	-	LN1134A29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4EY	-	LN1193A29AKR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4EY	-	LN1193A29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4EY	-	XC6204A29AMR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4EY	ec	XC6105C529MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4EZ	-	LN1134A30AKR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4EZ	-	LN1134A30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4EZ	-	LN1193A30AKR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4EZ	-	LN1193A30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4EZ	-	XC6204A30AMR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4EZ	ec	XC6105C530MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4F	-	R3111N541A	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
4F	eu	RN5VD54CA	Vdet-IC	5.4V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
4F0	ej	XC6105C631MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4F1	ej	XC6105C632MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4F2	ej	XC6105C633MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4F3	ej	XC6105C634MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4F4	ej	XC6105C635MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4F5	ej	XC6105C636MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4F6	ej	XC6105C637MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4F7	ej	XC6105C638MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4F8	-	XC9235A08DMR-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4F8	ej	XC6105C639MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4F9	-	LN1134B10AKR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4F9	-	LN1134B10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4F9	-	LN1193B10AKR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4F9	-	LN1193B10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4F9	-	XC9235A09DMR-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4F9	ej	XC6105C640MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FA	-	LN1134B11AKR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FA	-	LN1134B11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FA	-	LN1193B11AKR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FA	-	LN1193B11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FA	ej	XC6105C641MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FB	-	LN1134B12AKR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FB	-	LN1134B12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FB	-	LN1193B12AKR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FB	-	LN1193B12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FB	ej	XC6105C642MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FC	-	LN1134B13AKR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FC	-	LN1134B13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FC	-	LN1193B13AKR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FC	-	LN1193B13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FC	ej	XC6105C643MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FD	-	LN1134B14AKR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FD	-	LN1134B14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FD	-	LN1193B14AKR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FD	-	LN1193B14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FD	ej	XC6105C644MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FE	-	LN1134B15AKR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FE	-	LN1134B15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FE	-	LN1193B15AKR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FE	-	LN1193B15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FE	ej	XC6105C645MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FF	-	LN1134B16AKR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FF	-	LN1134B16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FF	-	LN1193B16AKR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FF	-	LN1193B16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FF	ec	XC6105C616MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FF	ej	XC6105C646MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FH	-	LN1134B17AKR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FH	-	LN1134B17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FH	-	LN1193B17AKR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FH	-	LN1193B17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FH	ec	XC6105C617MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FH	ej	XC6105C647MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FK	-	LN1134B18AKR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FK	-	LN1134B18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FK	-	LN1193B18AKR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FK	-	LN1193B18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FK	-	XC6204B18AMR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4FK	ec	XC6105C618MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FK	ej	XC6105C648MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FL	-	LN1134B19AKR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FL	-	LN1134B19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FL	-	LN1193B19AKR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FL	-	LN1193B19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FL	-	XC6204B19AMR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4FL	-	XC9235A0LDMR-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4FL	ec	XC6105C619MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FL	ej	XC6105C649MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FM	-	LN1134B20AKR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FM	-	LN1134B20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FM	-	LN1193B20AKR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4FM	-	LN1193B20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FM	-	XC6204B20AMR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4FM	-	XC9235A0MDMR-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4FM	ec	XC6105C620MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FM	ej	XC6105C650MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FN	-	LN1134B21AKR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FN	-	LN1134B21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FN	-	LN1193B21AKR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FN	-	LN1193B21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FN	-	XC6204B21AMR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4FN	-	XC9140A331MR-G	DC-DC-IC	PWM step-up, 3.3V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
4FN	ec	XC6105C621MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FP	-	LN1134B22AKR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FP	-	LN1134B22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FP	-	LN1193B22AKR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FP	-	LN1193B22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FP	-	XC6204B22AMR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4FP	-	XC9140A501MR-G	DC-DC-IC	PWM step-up, 5.0V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
4FP	ec	XC6105C622MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FR	-	LN1134B23AKR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FR	-	LN1134B23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FR	-	LN1193B23AKR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FR	-	LN1193B23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FR	-	XC6204B23AMR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4FR	ec	XC6105C623MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FS	-	LN1134B24AKR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FS	-	LN1134B24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FS	-	LN1193B24AKR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FS	-	LN1193B24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FS	-	XC6204B24AMR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4FS	ec	XC6105C624MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FT	-	LN1134B25AKR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FT	-	LN1134B25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FT	-	LN1193B25AKR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FT	-	LN1193B25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FT	-	XC6204B25AMR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4FT	-	XC9140C331MR-G	DC-DC-IC	PWM step-up, 3.3V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
4FT	ec	XC6105C625MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FU	-	LN1134B26AKR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FU	-	LN1134B26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FU	-	LN1193B26AKR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FU	-	LN1193B26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FU	-	XC6204B26AMR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4FU	-	XC9140C501MR-G	DC-DC-IC	PWM step-up, 5.0V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
4FU	ec	XC6105C626MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FV	-	LN1134B27AKR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FV	-	LN1134B27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FV	-	LN1193B27AKR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FV	-	LN1193B27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FV	-	XC6204B27AMR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4FV	ec	XC6105C627MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FX	-	LN1134B28AKR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FX	-	LN1134B28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FX	-	LN1193B28AKR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FX	-	LN1193B28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FX	-	XC6204B28AMR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4FX	ec	XC6105C628MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FY	-	LN1134B29AKR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FY	-	LN1134B29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FY	-	LN1193B29AKR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FY	-	LN1193B29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FY	-	XC6204B29AMR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4FY	ec	XC6105C629MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4FZ	-	LN1134B30AKR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4FZ	-	LN1134B30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4FZ	-	LN1193B30AKR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4FZ	-	LN1193B30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4FZ	-	XC6204B30AMR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4FZ	ec	XC6105C630MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
4GA	-	AP6233S-25NHFGP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4GA	-	AP6233S-25NHFPP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4GA	eb	AP6233S-25NHFGA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GA	eb	AP6233S-25NHFPA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
4GA	ec	AP6233S-25NHFGA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GA	ec	AP6233S-25NHFPA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
4GA	eh	AP6233S-25NHFGP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GA	eh	AP6233S-25NHFPP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4GB	-	AP6233S-25NLFGP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GB	-	AP6233S-25NLFPP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4GB	eb	AP6233S-25NLFGA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GB	eb	AP6233S-25NLFPA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
4GB	ec	AP6233S-25NLFGA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GB	ec	AP6233S-25NLFPA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
4GB	eh	AP6233S-25NLFGP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GB	eh	AP6233S-25NLFPP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4GC	-	AP6233S-25NHNGP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GC	-	AP6233S-25NHNPP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
4GC	eb	AP6233S-25NHNGA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GC	eb	AP6233S-25NHNPA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
4GC	ec	AP6233S-25NHNGA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GC	ec	AP6233S-25NHNPA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
4GC	eh	AP6233S-25NHNGP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GC	eh	AP6233S-25NHNPP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
4GD	-	AP6233S-25NLNGP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GD	-	AP6233S-25NLNPP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
4GD	eb	AP6233S-25NLNGA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GD	eb	AP6233S-25NLNPA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
4GD	ec	AP6233S-25NLNGA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GD	ec	AP6233S-25NLNPA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
4GD	eh	AP6233S-25NLNGP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GD	eh	AP6233S-25NLNPP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
4GE	-	AP6233S-25UHFGP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GE	-	AP6233S-25UHFPP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4GE	eb	AP6233S-25UHFGA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GE	eb	AP6233S-25UHFPA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4GE	ec	AP6233S-25UHFGA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GE	ec	AP6233S-25UHFPA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4GE	eh	AP6233S-25UHFGP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GE	eh	AP6233S-25UHFPP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4GF	-	AP6233S-25ULFGP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GF	-	AP6233S-25ULFPP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4GF	eb	AP6233S-25ULFGA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GF	eb	AP6233S-25ULFPA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4GF	ec	AP6233S-25ULFGA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GF	ec	AP6233S-25ULFPA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4GF	eh	AP6233S-25ULFGP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GF	eh	AP6233S-25ULFPP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4GG	-	AP6233S-25UHNGP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GG	-	AP6233S-25UHNPP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4GG	eb	AP6233S-25UHNGA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GG	eb	AP6233S-25UHNPA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4GG	ec	AP6233S-25UHNGA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GG	ec	AP6233S-25UHNPA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4GG	eh	AP6233S-25UHNGP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GG	eh	AP6233S-25UHNPP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4GH	-	AP6233S-25ULNGP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GH	-	AP6233S-25ULNPP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4GH	eb	AP6233S-25ULNGA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GH	eb	AP6233S-25ULNPA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4GH	ec	AP6233S-25ULNGA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GH	ec	AP6233S-25ULNPA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4GH	eh	AP6233S-25ULNGP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GH	eh	AP6233S-25ULNPP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4GJ	-	AP6233S-25DHFGP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GJ	-	AP6233S-25DHFPP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4GJ	eb	AP6233S-25DHFGA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GJ	eb	AP6233S-25DHFPA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4GJ	ec	AP6233S-25DHFGA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GJ	ec	AP6233S-25DHFPA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4GJ	eh	AP6233S-25DHFGP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4GJ	eh	AP6233S-25DHFPP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4GK	-	AP6233S-25DLFGP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GK	-	AP6233S-25DLFPP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4GK	eb	AP6233S-25DLFGA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GK	eb	AP6233S-25DLFPA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4GK	ec	AP6233S-25DLFGA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GK	ec	AP6233S-25DLFPA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4GK	eh	AP6233S-25DLFGP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GK	eh	AP6233S-25DLFPP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4GL	-	AP6233S-25DHNGP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GL	-	AP6233S-25DHNPP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4GL	eb	AP6233S-25DHNGA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GL	eb	AP6233S-25DHNPA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4GL	ec	AP6233S-25DHNGA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GL	ec	AP6233S-25DHNPA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4GL	eh	AP6233S-25DHNGP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GL	eh	AP6233S-25DHNPP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4GM	-	AP6233S-25DLNGP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GM	-	AP6233S-25DLNPP	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4GM	eb	AP6233S-25DLNGA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GM	eb	AP6233S-25DLNPA	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4GM	ec	AP6233S-25DLNGA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4GM	ec	AP6233S-25DLNPA1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4GM	eh	AP6233S-25DLNGP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4GM	eh	AP6233S-25DLNPP1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4H0	-	XC9235A10DMR-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4H0	ej	XC6105D331MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4H1	-	XC9235A11DMR-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4H1	ej	XC6105D332MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4H2	-	XC9235A12DMR-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4H2	ej	XC6105D333MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4H3	-	XC9235A13DMR-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4H3	ej	XC6105D334MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4H4	-	XC9235A14DMR-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4H4	ej	XC6105D335MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4H5	-	XC9235A15DMR-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4H5	ej	XC6105D336MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4H6	-	XC9235A16DMR-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4H6	ej	XC6105D337MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4H7	-	XC9235A17DMR-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4H7	ej	XC6105D338MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4H8	-	XC9235A18DMR-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4H8	ej	XC6105D339MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4H9	-	LN1134C10AKR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4H9	-	LN1134C10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4H9	-	LN1193C10AKR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4H9	-	LN1193C10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4H9	-	XC9235A19DMR-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4H9	ej	XC6105D340MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HA	-	LN1134C11AKR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HA	-	LN1134C11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HA	-	LN1193C11AKR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HA	-	LN1193C11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HA	-	XC9235A1ADMR-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4HA	ej	XC6105D341MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HB	-	LN1134C12AKR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HB	-	LN1134C12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HB	-	LN1193C12AKR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HB	-	LN1193C12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HB	-	XC9235A1BDMR-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4HB	ej	XC6105D342MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HC	-	LN1134C13AKR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HC	-	LN1134C13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HC	-	LN1193C13AKR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HC	-	LN1193C13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HC	-	XC9235A1CDMR-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4HC	ej	XC6105D343MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HD	-	LN1134C14AKR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HD	-	LN1134C14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HD	-	LN1193C14AKR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4HD	-	LN1193C14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HD	-	XC9235A1DDMR-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4HD	ej	XC6105D344MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HE	-	LN1134C15AKR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HE	-	LN1134C15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HE	-	LN1193C15AKR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HE	-	LN1193C15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HE	-	XC9235A1EDMR-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4HE	ej	XC6105D345MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HF	-	LN1134C16AKR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HF	-	LN1134C16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HF	-	LN1193C16AKR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HF	-	LN1193C16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HF	-	XC9235A1FDMR-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4HF	ec	XC6105D316MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HF	ej	XC6105D346MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HH	-	LN1134C17AKR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HH	-	LN1134C17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HH	-	LN1193C17AKR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HH	-	LN1193C17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HH	-	XC9235A1HDMR-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4HH	ec	XC6105D317MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HH	ej	XC6105D347MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HK	-	LN1134C18AKR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HK	-	LN1134C18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HK	-	LN1193C18AKR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HK	-	LN1193C18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HK	-	XC6204C18AMR	LVR-IC	LDO, 1.85V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4HK	-	XC9235A1KDMR-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4HK	ec	XC6105D318MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HK	ej	XC6105D348MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HL	-	LN1134C19AKR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HL	-	LN1134C19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HL	-	LN1193C19AKR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HL	-	LN1193C19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HL	-	XC6204C19AMR	LVR-IC	LDO, 1.95V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4HL	-	XC9235A1LDMR-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4HL	ec	XC6105D319MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HL	ej	XC6105D349MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HM	-	LN1134C20AKR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HM	-	LN1134C20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HM	-	LN1193C20AKR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HM	-	LN1193C20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HM	-	XC6204C20AMR	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4HM	-	XC9235A1MDMR-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4HM	ec	XC6105D320MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HM	ej	XC6105D350MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HN	-	LN1134C21AKR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HN	-	LN1134C21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HN	-	LN1193C21AKR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HN	-	LN1193C21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HN	-	XC6204C21AMR	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4HN	-	XC9140A341MR-G	DC-DC-IC	PWM step-up, 3.4V±2%, 100mA, +CE	SOT-25	28g7	DC19a	6g	Tor
4HN	ec	XC6105D321MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HP	-	LN1134C22AKR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HP	-	LN1134C22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HP	-	LN1193C22AKR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HP	-	LN1193C22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HP	-	XC6204C22AMR	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4HP	ec	XC6105D322MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HR	-	LN1134C23AKR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HR	-	LN1134C23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HR	-	LN1193C23AKR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HR	-	LN1193C23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HR	-	XC6204C23AMR	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4HR	ec	XC6105D323MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HS	-	LN1134C24AKR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HS	-	LN1134C24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HS	-	LN1193C24AKR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HS	-	LN1193C24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4HS	-	XC6204C24AMR	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4HS	ec	XC6105D324MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HT	-	LN1134C25AKR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HT	-	LN1134C25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HT	-	LN1193C25AKR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HT	-	LN1193C25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HT	-	XC6204C25AMR	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4HT	-	XC9140C341MR-G	DC-DC-IC	PWM step-up, 3.4V±2%, 100mA, +CE, CL	SOT-25	28g7	DC19a	6g	Tor
4HT	ec	XC6105D325MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HU	-	LN1134C26AKR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HU	-	LN1134C26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HU	-	LN1193C26AKR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HU	-	LN1193C26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HU	-	XC6204C26AMR	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4HU	ec	XC6105D326MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HV	-	LN1134C27AKR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HV	-	LN1134C27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HV	-	LN1193C27AKR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HV	-	LN1193C27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HV	-	XC6204C27AMR	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4HV	ec	XC6105D327MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HX	-	LN1134C28AKR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HX	-	LN1134C28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HX	-	LN1193C28AKR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HX	-	LN1193C28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HX	-	XC6204C28AMR	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4HX	ec	XC6105D328MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HY	-	LN1134C29AKR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HY	-	LN1134C29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HY	-	LN1193C29AKR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HY	-	LN1193C29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HY	-	XC6204C29AMR	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4HY	ec	XC6105D329MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4HZ	-	LN1134C30AKR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4HZ	-	LN1134C30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4HZ	-	LN1193C30AKR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4HZ	-	LN1193C30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4HZ	-	XC6204C30AMR	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4HZ	ec	XC6105D330MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4J	-	R3111N141C	Vdet-IC	1.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
4K	-	R3111N241C	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
4K0	-	XC9235A20DMR-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4K0	ej	XC6105D431MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4K1	-	XC9235A21DMR-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4K1	ej	XC6105D432MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4K2	-	XC9235A22DMR-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4K2	ej	XC6105D433MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4K3	-	XC9235A23DMR-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4K3	ej	XC6105D434MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4K4	-	XC9235A24DMR-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4K4	ej	XC6105D435MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4K5	-	XC9235A25DMR-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4K5	ej	XC6105D436MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4K6	-	XC9235A26DMR-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4K6	ej	XC6105D437MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4K7	-	XC9235A27DMR-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4K7	ej	XC6105D438MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4K8	-	XC9235A28DMR-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4K8	ej	XC6105D439MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4K9	-	LN1134D10AKR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4K9	-	LN1134D10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4K9	-	LN1193D10AKR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4K9	-	LN1193D10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4K9	-	XC9235A29DMR-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4K9	ej	XC6105D440MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KA	-	LN1134D11AKR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KA	-	LN1134D11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KA	-	LN1193D11AKR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KA	-	LN1193D11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KA	-	XC9235A2ADMR-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4KA	ej	XC6105D441MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KB	-	LN1134D12AKR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KB	-	LN1134D12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KB	-	LN1193D12AKR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KB	-	LN1193D12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KB	-	XC9235A2BDMR-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4KB	ej	XC6105D442MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KC	-	LN1134D13AKR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KC	-	LN1134D13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KC	-	LN1193D13AKR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KC	-	LN1193D13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KC	-	XC9235A2CDMR-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4KC	ej	XC6105D443MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KD	-	LN1134D14AKR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KD	-	LN1134D14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KD	-	LN1193D14AKR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KD	-	LN1193D14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KD	-	XC9235A2DDMR-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4KD	ej	XC6105D444MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KE	-	LN1134D15AKR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KE	-	LN1134D15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KE	-	LN1193D15AKR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KE	-	LN1193D15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KE	-	XC9235A2EDMR-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4KE	ej	XC6105D445MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KF	-	LN1134D16AKR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KF	-	LN1134D16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KF	-	LN1193D16AKR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KF	-	LN1193D16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KF	-	XC9235A2FDMR-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4KF	ec	XC6105D416MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KF	ej	XC6105D446MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KH	-	LN1134D17AKR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KH	-	LN1134D17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KH	-	LN1193D17AKR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KH	-	LN1193D17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KH	-	XC9235A2HDMR-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4KH	ec	XC6105D417MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KH	ej	XC6105D447MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KK	-	LN1134D18AKR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KK	-	LN1134D18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KK	-	LN1193D18AKR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KK	-	LN1193D18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KK	-	XC6204D18AMR	LVR-IC	LDO, 1.85V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4KK	-	XC9235A2KDMR-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4KK	ec	XC6105D418MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KK	ej	XC6105D448MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KL	-	LN1134D19AKR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KL	-	LN1134D19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KL	-	LN1193D19AKR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KL	-	LN1193D19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KL	-	XC6204D19AMR	LVR-IC	LDO, 1.95V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4KL	-	XC9235A2LDMR-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4KL	ec	XC6105D419MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KL	ej	XC6105D449MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KM	-	LN1134D20AKR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KM	-	LN1134D20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KM	-	LN1193D20AKR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KM	-	LN1193D20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KM	-	XC6204D20AMR	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4KM	-	XC9235A2MDMR-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4KM	ec	XC6105D420MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KM	ej	XC6105D450MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KN	-	LN1134D21AKR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KN	-	LN1134D21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KN	-	LN1193D21AKR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KN	-	LN1193D21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KN	-	XC6204D21AMR	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4KN	ec	XC6105D421MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KP	-	LN1134D22AKR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4KP	-	LN1134D22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KP	-	LN1193D22AKR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KP	-	LN1193D22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KP	-	XC6204D22AMR	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4KP	ec	XC6105D422MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KR	-	LN1134D23AKR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KR	-	LN1134D23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KR	-	LN1193D23AKR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KR	-	LN1193D23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KR	-	XC6204D23AMR	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4KR	ec	XC6105D423MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KS	-	LN1134D24AKR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KS	-	LN1134D24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KS	-	LN1193D24AKR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KS	-	LN1193D24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KS	-	XC6204D24AMR	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4KS	ec	XC6105D424MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KT	-	LN1134D25AKR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KT	-	LN1134D25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KT	-	LN1193D25AKR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KT	-	LN1193D25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KT	-	XC6204D25AMR	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4KT	ec	XC6105D425MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KU	-	LN1134D26AKR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KU	-	LN1134D26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KU	-	LN1193D26AKR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KU	-	LN1193D26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KU	-	XC6204D26AMR	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4KU	ec	XC6105D426MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KV	-	LN1134D27AKR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KV	-	LN1134D27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KV	-	LN1193D27AKR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KV	-	LN1193D27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KV	-	XC6204D27AMR	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4KV	ec	XC6105D427MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KX	-	LN1134D28AKR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KX	-	LN1134D28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KX	-	LN1193D28AKR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KX	-	LN1193D28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KX	-	XC6204D28AMR	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4KX	ec	XC6105D428MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KY	-	LN1134D29AKR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KY	-	LN1134D29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KY	-	LN1193D29AKR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KY	-	LN1193D29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KY	-	XC6204D29AMR	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4KY	ec	XC6105D429MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4KZ	-	LN1134D30AKR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4KZ	-	LN1134D30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4KZ	-	LN1193D30AKR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4KZ	-	LN1193D30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4KZ	-	XC6204D30AMR	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4KZ	ec	XC6105D430MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4L	-	R3111N341C	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
4L0	-	LN1134A31AKR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4L0	-	LN1134A31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4L0	-	XC6204A31AMR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4L0	-	XC9235A30DMR-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4L0	ej	XC6105D531MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4L1	-	LN1134A32AKR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4L1	-	LN1134A32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4L1	-	XC6204A32AMR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4L1	-	XC9235A31DMR-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4L1	ej	XC6105D532MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4L2	-	LN1134A33AKR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4L2	-	LN1134A33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4L2	-	XC6204A33AMR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4L2	-	XC9235A32DMR-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4L2	ej	XC6105D533MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4L3	-	LN1134A34AKR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4L3	-	LN1134A34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4L3	-	XC6204A34AMR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4L3	-	XC9235A33DMR-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4L3	ej	XC6105D534MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4L4	-	LN1134A35AKR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4L4	-	LN1134A35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4L4	-	XC6204A35AMR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4L4	-	XC9235A34DMR-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4L4	ej	XC6105D535MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4L5	-	LN1134A36AKR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4L5	-	LN1134A36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4L5	-	XC6204A36AMR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4L5	-	XC9235A35DMR-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4L5	ej	XC6105D536MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4L6	-	LN1134A37AKR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4L6	-	LN1134A37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4L6	-	XC6204A37AMR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4L6	-	XC9235A36DMR-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4L6	ej	XC6105D537MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4L7	-	LN1134A38AKR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4L7	-	LN1134A38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4L7	-	XC6204A38AMR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4L7	-	XC9235A37DMR-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4L7	ej	XC6105D538MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4L8	-	LN1134A39AKR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4L8	-	LN1134A39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4L8	-	XC6204A39AMR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4L8	-	XC9235A38DMR-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4L8	ej	XC6105D539MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4L9	-	LN1134A40AKR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4L9	-	LN1134A40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4L9	-	XC6204A40AMR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4L9	-	XC9235A39DMR-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4L9	ej	XC6105D540MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LA	-	AP6233S-285NHFGP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LA	-	AP6233S-285NHFPP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4LA	-	LN1134A41AKR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LA	-	LN1134A41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LA	-	XC6204A41AMR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LA	-	XC9235A3ADMR-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4LA	eb	AP6233S-285NHFGA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LA	eb	AP6233S-285NHFPA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
4LA	ec	AP6233S-285NHFGA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LA	ec	AP6233S-285NHFPA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
4LA	eh	AP6233S-285NHFGP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LA	eh	AP6233S-285NHFPP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4LA	ej	XC6105D541MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LB	-	AP6233S-285NLFGP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LB	-	AP6233S-285NLFPP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4LB	-	LN1134A42AKR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LB	-	LN1134A42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LB	-	XC6204A42AMR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LB	-	XC9235A3BDMR-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4LB	eb	AP6233S-285NLFGA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LB	eb	AP6233S-285NLFPA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
4LB	ec	AP6233S-285NLFGA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LB	ec	AP6233S-285NLFPA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
4LB	eh	AP6233S-285NLFGP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LB	eh	AP6233S-285NLFPP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4LB	ej	XC6105D542MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LC	-	AP6233S-285NHNGP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LC	-	AP6233S-285NHNPP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
4LC	-	LN1134A43AKR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LC	-	LN1134A43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LC	-	XC6204A43AMR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LC	-	XC9235A3CDMR-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4LC	eb	AP6233S-285NHNGA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LC	eb	AP6233S-285NHNPA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
4LC	ec	AP6233S-285NHNGA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LC	ec	AP6233S-285NHNPA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4LC	eh	AP6233S-285NHNGP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LC	eh	AP6233S-285NHNPP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
4LC	ej	XC6105D543MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LD	-	AP6233S-285NLNGP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LD	-	AP6233S-285NLNPP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
4LD	-	LN1134A44AKR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LD	-	LN1134A44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LD	-	XC6204A44AMR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LD	-	XC9235A3DDMR-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4LD	eb	AP6233S-285NLNGA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LD	eb	AP6233S-285NLNPA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
4LD	ec	AP6233S-285NLNGA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LD	ec	AP6233S-285NLNPA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
4LD	eh	AP6233S-285NLNGP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LD	eh	AP6233S-285NLNPP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
4LD	ej	XC6105D544MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LE	-	AP6233S-285UHFGP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LE	-	AP6233S-285UHFPP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4LE	-	LN1134A45AKR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LE	-	LN1134A45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LE	-	XC6204A45AMR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LE	-	XC9235A3EDMR-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4LE	eb	AP6233S-285UHFGA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LE	eb	AP6233S-285UHFPA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4LE	ec	AP6233S-285UHFGA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LE	ec	AP6233S-285UHFPA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4LE	eh	AP6233S-285UHFGP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LE	eh	AP6233S-285UHFPP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4LE	ej	XC6105D545MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LF	-	AP6233S-285ULFGP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LF	-	AP6233S-285ULFPP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4LF	-	LN1134A46AKR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LF	-	LN1134A46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LF	-	XC6204A46AMR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LF	-	XC9235A3FDMR-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4LF	eb	AP6233S-285ULFGA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LF	eb	AP6233S-285ULFPA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4LF	ec	AP6233S-285ULFGA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LF	ec	AP6233S-285ULFPA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4LF	ec	XC6105D516MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LF	eh	AP6233S-285ULFGP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LF	eh	AP6233S-285ULFPP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4LF	ej	XC6105D546MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LG	-	AP6233S-285UHNGP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LG	-	AP6233S-285UHNPP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4LG	eb	AP6233S-285UHNGA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LG	eb	AP6233S-285UHNPA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4LG	ec	AP6233S-285UHNGA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LG	ec	AP6233S-285UHNPA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4LG	eh	AP6233S-285UHNGP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LG	eh	AP6233S-285UHNPP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4LH	-	AP6233S-285ULNGP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LH	-	AP6233S-285ULNPP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4LH	-	LN1134A47AKR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LH	-	LN1134A47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LH	-	XC6204A47AMR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LH	-	XC9235A3HDMR-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4LH	eb	AP6233S-285ULNGA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LH	eb	AP6233S-285ULNPA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4LH	ec	AP6233S-285ULNGA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LH	ec	AP6233S-285ULNPA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4LH	ec	XC6105D517MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LH	eh	AP6233S-285ULNGP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LH	eh	AP6233S-285ULNPP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4LH	ej	XC6105D547MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LJ	-	AP6233S-285DHFGP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LJ	-	AP6233S-285DHFPP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4LJ	eb	AP6233S-285DHFGA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LJ	eb	AP6233S-285DHFPA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4LJ	ec	AP6233S-285DHFGA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4LJ	ec	AP6233S-285DHFPA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4LJ	eh	AP6233S-285DHFGP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LJ	eh	AP6233S-285DHFPP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4LK	-	AP6233S-285DLFGP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LK	-	AP6233S-285DLFPP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4LK	-	LN1134A48AKR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LK	-	LN1134A48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LK	-	XC6204A48AMR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LK	-	XC9235A3KDMR-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4LK	eb	AP6233S-285DLFGA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LK	eb	AP6233S-285DLFPA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4LK	ec	AP6233S-285DLFGA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LK	ec	AP6233S-285DLFPA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4LK	ec	XC6105D518MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LK	eh	AP6233S-285DLFGP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LK	eh	AP6233S-285DLFPP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4LK	ej	XC6105D548MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LL	-	AP6233S-285DHNGP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LL	-	AP6233S-285DHNPP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4LL	-	LN1134A49AKR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LL	-	LN1134A49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LL	-	XC6204A49AMR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LL	-	XC9235A3LDMR-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4LL	eb	AP6233S-285DHNGA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LL	eb	AP6233S-285DHNPA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4LL	ec	AP6233S-285DHNGA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LL	ec	AP6233S-285DHNPA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4LL	ec	XC6105D519MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LL	eh	AP6233S-285DHNGP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LL	eh	AP6233S-285DHNPP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4LL	ej	XC6105D549MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LM	-	AP6233S-285DLNGP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LM	-	AP6233S-285DLNPP	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4LM	-	LN1134A50AKR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LM	-	LN1134A50AMR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LM	-	XC6204A50AMR	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LM	-	XC9235A3MDMR-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4LM	eb	AP6233S-285DLNGA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LM	eb	AP6233S-285DLNPA	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4LM	ec	AP6233S-285DLNGA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4LM	ec	AP6233S-285DLNPA1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4LM	ec	XC6105D520MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LM	eh	AP6233S-285DLNGP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4LM	eh	AP6233S-285DLNPP1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4LM	ej	XC6105D550MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LN	-	LN1134A51AKR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LN	-	LN1134A51AMR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LN	-	XC6204A51AMR	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LN	ec	XC6105D521MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LP	-	LN1134A52AKR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LP	-	LN1134A52AMR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LP	-	XC6204A52AMR	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LP	ec	XC6105D522MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LR	-	LN1134A53AKR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LR	-	LN1134A53AMR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LR	-	XC6204A53AMR	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LR	ec	XC6105D523MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LS	-	LN1134A54AKR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LS	-	LN1134A54AMR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LS	-	XC6204A54AMR	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LS	ec	XC6105D524MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LT	-	LN1134A55AKR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LT	-	LN1134A55AMR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LT	-	XC6204A55AMR	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LT	ec	XC6105D525MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LU	-	LN1134A56AKR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LU	-	LN1134A56AMR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LU	-	XC6204A56AMR	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LU	ec	XC6105D526MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LV	-	LN1134A57AKR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4LV	-	LN1134A57AMR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LV	-	XC6204A57AMR	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LV	ec	XC6105D527MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LX	-	LN1134A58AKR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LX	-	LN1134A58AMR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LX	-	XC6204A58AMR	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LX	ec	XC6105D528MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LY	-	LN1134A59AKR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4LY	-	LN1134A59AMR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4LY	-	XC6204A59AMR	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4LY	ec	XC6105D529MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4LZ	ec	XC6105D530MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4M	-	R3111N441C	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
4M0	-	LN1134B31AKR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4M0	-	LN1134B31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4M0	-	LN1193A31AKR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4M0	-	LN1193A31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4M0	-	XC6204B31AMR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4M0	-	XC9235A40DMR-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
4M0	ej	XC6105D631MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4M1	-	LN1134B32AKR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4M1	-	LN1134B32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4M1	-	LN1193A32AKR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4M1	-	LN1193A32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4M1	-	XC6204B32AMR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4M1	ej	XC6105D632MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4M2	-	LN1134B33AKR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4M2	-	LN1134B33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4M2	-	LN1193A33AKR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4M2	-	LN1193A33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4M2	-	XC6204B33AMR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4M2	ej	XC6105D633MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4M3	-	LN1134B34AKR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4M3	-	LN1134B34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4M3	-	LN1193A34AKR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4M3	-	LN1193A34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4M3	-	XC6204B34AMR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4M3	ej	XC6105D634MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4M4	-	LN1134B35AKR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4M4	-	LN1134B35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4M4	-	LN1193A35AKR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4M4	-	LN1193A35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4M4	-	XC6204B35AMR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4M4	ej	XC6105D635MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4M5	-	LN1134B36AKR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4M5	-	LN1134B36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4M5	-	LN1193A36AKR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4M5	-	LN1193A36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4M5	-	XC6204B36AMR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4M5	ej	XC6105D636MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4M6	-	LN1134B37AKR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4M6	-	LN1134B37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4M6	-	LN1193A37AKR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4M6	-	LN1193A37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4M6	-	XC6204B37AMR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4M6	ej	XC6105D637MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4M7	-	LN1134B38AKR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4M7	-	LN1134B38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4M7	-	LN1193A38AKR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4M7	-	LN1193A38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4M7	-	XC6204B38AMR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4M7	ej	XC6105D638MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4M8	-	LN1134B39AKR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4M8	-	LN1134B39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4M8	-	LN1193A39AKR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4M8	-	LN1193A39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4M8	-	XC6204B39AMR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4M8	ej	XC6105D639MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4M9	-	LN1134B40AKR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4M9	-	LN1134B40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4M9	-	LN1193A40AKR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4M9	-	LN1193A40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4M9	-	XC6204B40AMR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4M9	ej	XC6105D640MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MA	-	AP6233S-30NHFGP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MA	-	AP6233S-30NHFPP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4MA	-	LN1134B41AKR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MA	-	LN1134B41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MA	-	LN1193A41AKR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4MA	-	LN1193A41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MA	-	XC6204B41AMR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MA	eb	AP6233S-30NHFGA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MA	eb	AP6233S-30NHFPA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
4MA	ec	AP6233S-30NHFGA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MA	ec	AP6233S-30NHFPA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
4MA	eh	AP6233S-30NHFGP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MA	eh	AP6233S-30NHFPP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4MA	ej	XC6105D641MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MB	-	AP6233S-30NLFGP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MB	-	AP6233S-30NLFPP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4MB	-	LN1134B42AKR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MB	-	LN1134B42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MB	-	LN1193A42AKR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4MB	-	LN1193A42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MB	-	XC6204B42AMR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MB	eb	AP6233S-30NLFGA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MB	eb	AP6233S-30NLFPA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
4MB	ec	AP6233S-30NLFGA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MB	ec	AP6233S-30NLFPA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
4MB	eh	AP6233S-30NLFGP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MB	eh	AP6233S-30NLFPP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4MB	ej	XC6105D642MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MC	-	AP6233S-30NHNGP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MC	-	AP6233S-30NHNPP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
4MC	-	LN1134B43AKR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MC	-	LN1134B43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MC	-	LN1193A43AKR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4MC	-	LN1193A43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MC	-	XC6204B43AMR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MC	eb	AP6233S-30NHNGA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MC	eb	AP6233S-30NHNPA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
4MC	ec	AP6233S-30NHNGA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MC	ec	AP6233S-30NHNPA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
4MC	eh	AP6233S-30NHNGP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MC	eh	AP6233S-30NHNPP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
4MC	ej	XC6105D643MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MD	-	AP6233S-30NLNGP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MD	-	AP6233S-30NLNPP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
4MD	-	LN1134B44AKR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MD	-	LN1134B44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MD	-	LN1193A44AKR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4MD	-	LN1193A44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MD	-	XC6204B44AMR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MD	eb	AP6233S-30NLNGA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MD	eb	AP6233S-30NLNPA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
4MD	ec	AP6233S-30NLNGA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MD	ec	AP6233S-30NLNPA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
4MD	eh	AP6233S-30NLNGP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MD	eh	AP6233S-30NLNPP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
4MD	ej	XC6105D644MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4ME	-	AP6233S-30UHFGP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ME	-	AP6233S-30UHFPP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4ME	-	LN1134B45AKR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4ME	-	LN1134B45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4ME	-	LN1193A45AKR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4ME	-	LN1193A45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4ME	-	XC6204B45AMR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4ME	eb	AP6233S-30UHFGA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ME	eb	AP6233S-30UHFPA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4ME	ec	AP6233S-30UHFGA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4ME	ec	AP6233S-30UHFPA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4ME	eh	AP6233S-30UHFGP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ME	eh	AP6233S-30UHFPP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4ME	ej	XC6105D645MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MF	-	AP6233S-30ULFGP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MF	-	AP6233S-30ULFPP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4MF	-	LN1134B46AKR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MF	-	LN1134B46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MF	-	LN1193A46AKR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4MF	-	LN1193A46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MF	-	XC6204B46AMR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MF	eb	AP6233S-30ULFGA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MF	eb	AP6233S-30ULFPA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4MF	ec	AP6233S-30ULFGA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MF	ec	AP6233S-30ULFPA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4MF	ec	XC6105D616MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MF	eh	AP6233S-30ULFGP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MF	eh	AP6233S-30ULFPP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4MF	ej	XC6105D646MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MG	-	AP6233S-30UHNGP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MG	-	AP6233S-30UHNPP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4MG	eb	AP6233S-30UHNGA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MG	eb	AP6233S-30UHNPA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4MG	ec	AP6233S-30UHNGA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MG	ec	AP6233S-30UHNPA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4MG	eh	AP6233S-30UHNGP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MG	eh	AP6233S-30UHNPP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4MH	-	AP6233S-30ULNGP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MH	-	AP6233S-30ULNPP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4MH	-	LN1134B47AKR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MH	-	LN1134B47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MH	-	LN1193A47AKR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4MH	-	LN1193A47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MH	-	XC6204B47AMR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MH	eb	AP6233S-30ULNGA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MH	eb	AP6233S-30ULNPA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4MH	ec	AP6233S-30ULNGA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MH	ec	AP6233S-30ULNPA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4MH	ec	XC6105D617MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MH	eh	AP6233S-30ULNGP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MH	eh	AP6233S-30ULNPP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4MH	ej	XC6105D647MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MJ	-	AP6233S-30DHFGP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MJ	-	AP6233S-30DHFPP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4MJ	eb	AP6233S-30DHFGA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MJ	eb	AP6233S-30DHFPA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4MJ	ec	AP6233S-30DHFGA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MJ	ec	AP6233S-30DHFPA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4MJ	eh	AP6233S-30DHFGP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MJ	eh	AP6233S-30DHFPP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4MK	-	AP6233S-30DLFGP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MK	-	AP6233S-30DLFPP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4MK	-	LN1134B48AKR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MK	-	LN1134B48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MK	-	LN1193A48AKR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4MK	-	LN1193A48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MK	-	XC6204B48AMR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MK	eb	AP6233S-30DLFGA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MK	eb	AP6233S-30DLFPA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4MK	ec	AP6233S-30DLFGA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MK	ec	AP6233S-30DLFPA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4MK	ec	XC6105D618MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MK	eh	AP6233S-30DLFGP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MK	eh	AP6233S-30DLFPP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4MK	ej	XC6105D648MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4ML	-	AP6233S-30DHNGP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ML	-	AP6233S-30DHNPP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4ML	-	LN1134B49AKR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4ML	-	LN1134B49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4ML	-	LN1193A49AKR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4ML	-	LN1193A49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4ML	-	XC6204B49AMR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4ML	eb	AP6233S-30DHNGA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ML	eb	AP6233S-30DHNPA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4ML	ec	AP6233S-30DHNGA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ML	ec	AP6233S-30DHNPA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4ML	ec	XC6105D619MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4ML	eh	AP6233S-30DHNGP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ML	eh	AP6233S-30DHNPP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4ML	ej	XC6105D649MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MM	-	AP6233S-30DLNGP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MM	-	AP6233S-30DLNPP	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4MM	-	LN1134B50AKR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MM	-	LN1134B50AMR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MM	-	LN1193A50AKR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4MM	-	LN1193A50AMR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MM	-	XC6204B50AMR	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MM	eb	AP6233S-30DLNGA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MM	eb	AP6233S-30DLNPA	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4MM	ec	AP6233S-30DLNGA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4MM	ec	AP6233S-30DLNPA1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4MM	ec	XC6105D620MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MM	eh	AP6233S-30DLNGP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4MM	eh	AP6233S-30DLNPP1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4MM	ej	XC6105D650MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MN	-	LN1134B51AKR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MN	-	LN1134B51AMR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MN	-	LN1193A51AKR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4MN	-	LN1193A51AMR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MN	-	XC6204B51AMR	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MN	ec	XC6105D621MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MP	-	LN1134B52AKR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MP	-	LN1134B52AMR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MP	-	LN1193A52AKR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4MP	-	LN1193A52AMR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MP	-	XC6204B52AMR	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MP	ec	XC6105D622MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MR	-	LN1134B53AKR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MR	-	LN1134B53AMR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MR	-	LN1193A53AKR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4MR	-	LN1193A53AMR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MR	-	XC6204B53AMR	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MR	ec	XC6105D623MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MS	-	LN1134B54AKR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MS	-	LN1134B54AMR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MS	-	LN1193A54AKR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4MS	-	LN1193A54AMR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MS	-	XC6204B54AMR	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MS	ec	XC6105D624MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MT	-	LN1134B55AKR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MT	-	LN1134B55AMR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MT	-	LN1193A55AKR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4MT	-	LN1193A55AMR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MT	-	XC6204B55AMR	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MT	ec	XC6105D625MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MU	-	LN1134B56AKR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MU	-	LN1134B56AMR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MU	-	LN1193A56AKR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4MU	-	LN1193A56AMR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MU	-	XC6204B56AMR	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MU	ec	XC6105D626MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MV	-	LN1134B57AKR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MV	-	LN1134B57AMR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MV	-	LN1193A57AKR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4MV	-	LN1193A57AMR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MV	-	XC6204B57AMR	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MV	ec	XC6105D627MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MX	-	LN1134B58AKR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MX	-	LN1134B58AMR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MX	-	LN1193A58AKR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4MX	-	LN1193A58AMR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MX	-	XC6204B58AMR	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MX	ec	XC6105D628MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MY	-	LN1134B59AKR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4MY	-	LN1134B59AMR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4MY	-	LN1193A59AKR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4MY	-	LN1193A59AMR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4MY	-	XC6204B59AMR	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4MY	ec	XC6105D629MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4MZ	ec	XC6105D630MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
4N	-	R3111N541C	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
4N0	-	LN1134C31AKR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4N0	-	LN1134C31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4N0	-	LN1193B31AKR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4N0	-	LN1193B31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4N0	-	XC6204C31AMR	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4N1	-	LN1134C32AKR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4N1	-	LN1134C32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4N1	-	LN1193B32AKR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4N1	-	LN1193B32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4N1	-	XC6204C32AMR	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4N2	-	LN1134C33AKR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4N2	-	LN1134C33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4N2	-	LN1193B33AKR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4N2	-	LN1193B33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4N2	-	XC6204C33AMR	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4N3	-	LN1134C34AKR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4N3	-	LN1134C34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4N3	-	LN1193B34AKR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4N3	-	LN1193B34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4N3	-	XC6204C34AMR	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4N4	-	LN1134C35AKR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4N4	-	LN1134C35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4N4	-	LN1193B35AKR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4N4	-	LN1193B35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4N4	-	XC6204C35AMR	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4N5	-	LN1134C36AKR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4N5	-	LN1134C36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4N5	-	LN1193B36AKR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4N5	-	LN1193B36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4N5	-	XC6204C36AMR	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4N6	-	LN1134C37AKR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4N6	-	LN1134C37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4N6	-	LN1193B37AKR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4N6	-	LN1193B37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4N6	-	XC6204C37AMR	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4N7	-	LN1134C38AKR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4N7	-	LN1134C38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4N7	-	LN1193B38AKR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4N7	-	LN1193B38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4N7	-	XC6204C38AMR	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4N8	-	LN1134C39AKR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4N8	-	LN1134C39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4N8	-	LN1193B39AKR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4N8	-	LN1193B39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4N8	-	XC6204C39AMR	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4N8	-	XC9235E08CMR-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4N9	-	LN1134C40AKR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4N9	-	LN1134C40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4N9	-	LN1193B40AKR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4N9	-	LN1193B40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4N9	-	XC6204C40AMR	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4N9	-	XC9235E09CMR-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4NA	-	AP6233S-31NHFGP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NA	-	AP6233S-31NHFPP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4NA	-	LN1134C41AKR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NA	-	LN1134C41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NA	-	LN1193B41AKR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NA	-	LN1193B41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NA	-	XC6204C41AMR	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4NA	eb	AP6233S-31NHFGA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NA	eb	AP6233S-31NHFPA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
4NA	ec	AP6233S-31NHFGA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NA	ec	AP6233S-31NHFPA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
4NA	eh	AP6233S-31NHFGP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NA	eh	AP6233S-31NHFPP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4NB	-	AP6233S-31NLFGP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NB	-	AP6233S-31NLFPP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4NB	-	LN1134C42AKR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NB	-	LN1134C42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NB	-	LN1193B42AKR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NB	-	LN1193B42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NB	-	XC6204C42AMR	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4NB	eb	AP6233S-31NLFGA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NB	eb	AP6233S-31NLFPA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
4NB	ec	AP6233S-31NLFGA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NB	ec	AP6233S-31NLFPA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
4NB	eh	AP6233S-31NLFGP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NB	eh	AP6233S-31NLFPP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4NC	-	AP6233S-31NHNGP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NC	-	AP6233S-31NHNPP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
4NC	-	LN1134C43AKR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NC	-	LN1134C43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NC	-	LN1193B43AKR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NC	-	LN1193B43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NC	-	XC6204C43AMR	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4NC	eb	AP6233S-31NHNGA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NC	eb	AP6233S-31NHNPA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
4NC	ec	AP6233S-31NHNGA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NC	ec	AP6233S-31NHNPA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
4NC	eh	AP6233S-31NHNGP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NC	eh	AP6233S-31NHNPP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
4ND	-	AP6233S-31NLNGP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ND	-	AP6233S-31NLNPP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
4ND	-	LN1134C44AKR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4ND	-	LN1134C44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4ND	-	LN1193B44AKR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4ND	-	LN1193B44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4ND	-	XC6204C44AMR	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4ND	eb	AP6233S-31NLNGA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ND	eb	AP6233S-31NLNPA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
4ND	ec	AP6233S-31NLNGA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ND	ec	AP6233S-31NLNPA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
4ND	eh	AP6233S-31NLNGP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ND	eh	AP6233S-31NLNPP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
4NE	-	AP6233S-31UHFGP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NE	-	AP6233S-31UHFPP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4NE	-	LN1134C45AKR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NE	-	LN1134C45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NE	-	LN1193B45AKR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NE	-	LN1193B45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NE	-	XC6204C45AMR	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4NE	eb	AP6233S-31UHFGA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NE	eb	AP6233S-31UHFPA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4NE	ec	AP6233S-31UHFGA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NE	ec	AP6233S-31UHFPA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4NE	eh	AP6233S-31UHFGP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NE	eh	AP6233S-31UHFPP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4NF	-	AP6233S-31ULFGP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NF	-	AP6233S-31ULFPP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4NF	-	LN1134C46AKR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NF	-	LN1134C46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NF	-	LN1193B46AKR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NF	-	LN1193B46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NF	-	XC6204C46AMR	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4NF	eb	AP6233S-31ULFGA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NF	eb	AP6233S-31ULFPA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4NF	ec	AP6233S-31ULFGA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NF	ec	AP6233S-31ULFPA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4NF	eh	AP6233S-31ULFGP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4NF	eh	AP6233S-31ULFPP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4NG	-	AP6233S-31UHNGP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NG	-	AP6233S-31UHNPP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4NG	eb	AP6233S-31UHNGA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NG	eb	AP6233S-31UHNPA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4NG	ec	AP6233S-31UHNGA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NG	ec	AP6233S-31UHNPA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4NG	eh	AP6233S-31UHNGP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NG	eh	AP6233S-31UHNPP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4NH	-	AP6233S-31ULNGP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NH	-	AP6233S-31ULNPP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4NH	-	LN1134C47AKR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NH	-	LN1134C47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NH	-	LN1193B47AKR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NH	-	LN1193B47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NH	-	XC6204C47AMR	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4NH	eb	AP6233S-31ULNGA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NH	eb	AP6233S-31ULNPA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4NH	ec	AP6233S-31ULNGA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NH	ec	AP6233S-31ULNPA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4NH	eh	AP6233S-31ULNGP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NH	eh	AP6233S-31ULNPP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4NJ	-	AP6233S-31DHFGP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NJ	-	AP6233S-31DHFPP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4NJ	eb	AP6233S-31DHFGA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NJ	eb	AP6233S-31DHFPA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4NJ	ec	AP6233S-31DHFGA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NJ	ec	AP6233S-31DHFPA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4NJ	eh	AP6233S-31DHFGP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NJ	eh	AP6233S-31DHFPP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4NK	-	AP6233S-31DLFGP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NK	-	AP6233S-31DLFPP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4NK	-	LN1134C48AKR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NK	-	LN1134C48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NK	-	LN1193B48AKR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NK	-	LN1193B48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NK	-	XC6204C48AMR	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4NK	eb	AP6233S-31DLFGA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NK	eb	AP6233S-31DLFPA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4NK	ec	AP6233S-31DLFGA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NK	ec	AP6233S-31DLFPA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4NK	eh	AP6233S-31DLFGP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NK	eh	AP6233S-31DLFPP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4NL	-	AP6233S-31DHNGP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NL	-	AP6233S-31DHNPP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4NL	-	LN1134C49AKR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NL	-	LN1134C49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NL	-	LN1193B49AKR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NL	-	LN1193B49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NL	-	XC6204C49AMR	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4NL	-	XC9235E0LCMR-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4NL	eb	AP6233S-31DHNGA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NL	eb	AP6233S-31DHNPA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4NL	ec	AP6233S-31DHNGA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NL	ec	AP6233S-31DHNPA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4NL	eh	AP6233S-31DHNGP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NL	eh	AP6233S-31DHNPP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4NM	-	AP6233S-31DLNGP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4NM	-	AP6233S-31DLNPP	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4NM	-	LN1134C50AKR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NM	-	LN1134C50AMR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NM	-	LN1193B50AKR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NM	-	LN1193B50AMR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NM	-	XC6204C50AMR	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4NM	-	XC9235E0MCMR-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4NM	eb	AP6233S-31DLNGA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NM	eb	AP6233S-31DLNPA	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4NM	ec	AP6233S-31DLNGA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4NM	ec	AP6233S-31DLNPA1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4NM	eh	AP6233S-31DLNGP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4NM	eh	AP6233S-31DLNPP1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4NN	-	LN1134C51AKR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NN	-	LN1134C51AMR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NN	-	LN1193B51AKR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NN	-	LN1193B51AMR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NN	-	XC6204C51AMR	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4NP	-	LN1134C52AKR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NP	-	LN1134C52AMR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NP	-	LN1193B52AKR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NP	-	LN1193B52AMR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NP	-	XC6204C52AMR	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4NR	-	LN1134C53AKR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NR	-	LN1134C53AMR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NR	-	LN1193B53AKR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NR	-	LN1193B53AMR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NR	-	XC6204C53AMR	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4NS	-	LN1134C54AKR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NS	-	LN1134C54AMR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NS	-	LN1193B54AKR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NS	-	LN1193B54AMR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NS	-	XC6204C54AMR	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4NT	-	LN1134C55AKR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NT	-	LN1134C55AMR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NT	-	LN1193B55AKR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NT	-	LN1193B55AMR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NT	-	XC6204C55AMR	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4NU	-	LN1134C56AKR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NU	-	LN1134C56AMR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NU	-	LN1193B56AKR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NU	-	LN1193B56AMR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NU	-	XC6204C56AMR	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4NV	-	LN1134C57AKR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NV	-	LN1134C57AMR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NV	-	LN1193B57AKR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NV	-	LN1193B57AMR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NV	-	XC6204C57AMR	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4NX	-	LN1134C58AKR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NX	-	LN1134C58AMR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NX	-	LN1193B58AKR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NX	-	LN1193B58AMR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NX	-	XC6204C58AMR	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4NY	-	LN1134C59AKR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4NY	-	LN1134C59AMR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4NY	-	LN1193B59AKR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4NY	-	LN1193B59AMR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4NY	-	XC6204C59AMR	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4O	-	XP01507	Si-npn	Dual, LN, 150V, 50mA, 150mW, >150MHz	SC-88A	28	T11	6a	Pan
4O	-	XP1507	Si-npn	Dual, LN, 150V, 50mA, 150mW, >150MHz	SC-88A	28	T11	6a	Pan
4P	-	XN1A312	Si-n/p-Digi	Dual, 50V, 100mA, 300mW, 150MHz, R1/R2=22k/22k	SOT-23-5	28	TD1	6a	Pan
4P0	-	LN1134D31AKR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4P0	-	LN1134D31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4P0	-	LN1193C31AKR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4P0	-	LN1193C31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4P0	-	XC6204D31AMR	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4P0	-	XC9235E10CMR-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4P0	ej	XC6105E431MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4P1	-	LN1134D32AKR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4P1	-	LN1134D32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4P1	-	LN1193C32AKR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4P1	-	LN1193C32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4P1	-	XC6204D32AMR	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4P1	-	XC9235E11CMR-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4P1	ej	XC6105E432MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4P2	-	LN1134D33AKR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4P2	-	LN1134D33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4P2	-	LN1193C33AKR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4P2	-	LN1193C33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4P2	-	XC6204D33AMR	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4P2	-	XC9235E12CMR-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4P2	ej	XC6105E433MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4P3	-	LN1134D34AKR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4P3	-	LN1134D34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4P3	-	LN1193C34AKR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4P3	-	LN1193C34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4P3	-	XC6204D34AMR	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4P3	-	XC9235E13CMR-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4P3	ej	XC6105E434MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4P4	-	LN1134D35AKR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4P4	-	LN1134D35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4P4	-	LN1193C35AKR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4P4	-	LN1193C35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4P4	-	XC6204D35AMR	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4P4	-	XC9235E14CMR-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4P4	ej	XC6105E435MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4P5	-	LN1134D36AKR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4P5	-	LN1134D36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4P5	-	LN1193C36AKR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4P5	-	LN1193C36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4P5	-	XC6204D36AMR	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4P5	-	XC9235E15CMR-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4P5	ej	XC6105E436MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4P6	-	LN1134D37AKR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4P6	-	LN1134D37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4P6	-	LN1193C37AKR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4P6	-	LN1193C37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4P6	-	XC6204D37AMR	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4P6	-	XC9235E16CMR-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4P6	ej	XC6105E437MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4P7	-	LN1134D38AKR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4P7	-	LN1134D38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4P7	-	LN1193C38AKR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4P7	-	LN1193C38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4P7	-	XC6204D38AMR	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4P7	-	XC9235E17CMR-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4P7	ej	XC6105E438MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4P8	-	LN1134D39AKR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4P8	-	LN1134D39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4P8	-	LN1193C39AKR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4P8	-	LN1193C39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4P8	-	XC6204D39AMR	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4P8	-	XC9235E18CMR-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4P8	ej	XC6105E439MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4P9	-	LN1134D40AKR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4P9	-	LN1134D40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4P9	-	LN1193C40AKR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4P9	-	LN1193C40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4P9	-	XC6204D40AMR	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4P9	-	XC9235E19CMR-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4P9	ej	XC6105E440MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PA	-	LN1134D41AKR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PA	-	LN1134D41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PA	-	LN1193C41AKR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PA	-	LN1193C41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PA	-	XC6204D41AMR	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PA	-	XC9235E1ACMR-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4PA	ej	XC6105E441MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PB	-	LN1134D42AKR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PB	-	LN1134D42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PB	-	LN1193C42AKR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PB	-	LN1193C42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PB	-	XC6204D42AMR	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PB	-	XC9235E1BCMR-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4PB	ej	XC6105E442MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PC	-	LN1134D43AKR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PC	-	LN1134D43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PC	-	LN1193C43AKR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PC	-	LN1193C43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PC	-	XC6204D43AMR	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PC	-	XC9235E1CCMR-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4PC	ej	XC6105E443MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4PD	-	LN1134D44AKR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PD	-	LN1134D44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PD	-	LN1193C44AKR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PD	-	LN1193C44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PD	-	XC6204D44AMR	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PD	-	XC9235E1DCMR-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4PD	ej	XC6105E444MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PE	-	LN1134D45AKR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PE	-	LN1134D45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PE	-	LN1193C45AKR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PE	-	LN1193C45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PE	-	XC6204D45AMR	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PE	-	XC9235E1ECMR-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4PE	ej	XC6105E445MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PF	-	LN1134D46AKR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PF	-	LN1134D46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PF	-	LN1193C46AKR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PF	-	LN1193C46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PF	-	XC6204D46AMR	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PF	-	XC9235E1FCMR-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4PF	ec	XC6105E416MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PF	ej	XC6105E446MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PH	-	LN1134D47AKR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PH	-	LN1134D47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PH	-	LN1193C47AKR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PH	-	LN1193C47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PH	-	XC6204D47AMR	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PH	-	XC9235E1HCMR-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4PH	ec	XC6105E417MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PH	ej	XC6105E447MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PK	-	LN1134D48AKR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PK	-	LN1134D48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PK	-	LN1193C48AKR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PK	-	LN1193C48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PK	-	XC6204D48AMR	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PK	-	XC9235E1KCMR-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4PK	ec	XC6105E418MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PK	ej	XC6105E448MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PL	-	LN1134D49AKR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PL	-	LN1134D49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PL	-	LN1193C49AKR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PL	-	LN1193C49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PL	-	XC6204D49AMR	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PL	-	XC9235E1LCMR-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4PL	ec	XC6105E419MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PL	ej	XC6105E449MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PM	-	LN1134D50AKR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PM	-	LN1134D50AMR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PM	-	LN1193C50AKR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PM	-	LN1193C50AMR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PM	-	XC6204D50AMR	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PM	-	XC9235E1MCMR-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4PM	ec	XC6105E420MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PM	ej	XC6105E450MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PN	-	LN1134D51AKR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PN	-	LN1134D51AMR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PN	-	LN1193C51AKR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PN	-	LN1193C51AMR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PN	-	XC6204D51AMR	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PN	ec	XC6105E421MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PP	-	LN1134D52AKR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PP	-	LN1134D52AMR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PP	-	LN1193C52AKR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PP	-	LN1193C52AMR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PP	-	XC6204D52AMR	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PP	ec	XC6105E422MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PR	-	LN1134D53AKR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PR	-	LN1134D53AMR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PR	-	LN1193C53AKR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PR	-	LN1193C53AMR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4PR	-	XC6204D53AMR	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PR	ec	XC6105E423MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PS	-	LN1134D54AKR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PS	-	LN1134D54AMR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PS	-	LN1193C54AKR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PS	-	LN1193C54AMR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PS	-	XC6204D54AMR	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PS	ec	XC6105E424MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PT	-	LN1134D55AKR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PT	-	LN1134D55AMR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PT	-	LN1193C55AKR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PT	-	LN1193C55AMR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PT	-	XC6204D55AMR	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PT	ec	XC6105E425MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PU	-	LN1134D56AKR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PU	-	LN1134D56AMR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PU	-	LN1193C56AKR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PU	-	LN1193C56AMR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PU	-	XC6204D56AMR	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PU	ec	XC6105E426MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PV	-	LN1134D57AKR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PV	-	LN1134D57AMR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PV	-	LN1193C57AKR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PV	-	LN1193C57AMR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PV	-	XC6204D57AMR	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PV	ec	XC6105E427MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PX	-	LN1134D58AKR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PX	-	LN1134D58AMR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PX	-	LN1193C58AKR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PX	-	LN1193C58AMR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PX	-	XC6204D58AMR	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PX	ec	XC6105E428MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PY	-	LN1134D59AKR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4PY	-	LN1134D59AMR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4PY	-	LN1193C59AKR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4PY	-	LN1193C59AMR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4PY	-	XC6204D59AMR	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4PY	ec	XC6105E429MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4PZ	ec	XC6105E430MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4Q	-	R1210N241A	DC-DC-IC	PWM step-up, 2.4V, 35..100kHz	SOT-23-5	28sc	DC3	6g	Ric
4QA	-	AP6233S-33NHFGP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QA	-	AP6233S-33NHFPP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4QA	eb	AP6233S-33NHFGA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QA	eb	AP6233S-33NHFPA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
4QA	ec	AP6233S-33NHFGA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QA	ec	AP6233S-33NHFPA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
4QA	eh	AP6233S-33NHFGP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QA	eh	AP6233S-33NHFPP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4QB	-	AP6233S-33NLFGP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QB	-	AP6233S-33NLFPP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4QB	eb	AP6233S-33NLFGA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QB	eb	AP6233S-33NLFPA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
4QB	ec	AP6233S-33NLFGA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QB	ec	AP6233S-33NLFPA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
4QB	eh	AP6233S-33NLFGP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QB	eh	AP6233S-33NLFPP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4QC	-	AP6233S-33NHNGP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QC	-	AP6233S-33NHNPP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
4QC	eb	AP6233S-33NHNGA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QC	eb	AP6233S-33NHNPA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
4QC	ec	AP6233S-33NHNGA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QC	ec	AP6233S-33NHNPA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
4QC	eh	AP6233S-33NHNGP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QC	eh	AP6233S-33NHNPP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
4QD	-	AP6233S-33NLNGP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QD	-	AP6233S-33NLNPP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
4QD	eb	AP6233S-33NLNGA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QD	eb	AP6233S-33NLNPA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
4QD	ec	AP6233S-33NLNGA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QD	ec	AP6233S-33NLNPA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4QD	eh	AP6233S-33NLNGP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QD	eh	AP6233S-33NLNPP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
4QE	-	AP6233S-33UHFGP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QE	-	AP6233S-33UHFPP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4QE	eb	AP6233S-33UHFGA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QE	eb	AP6233S-33UHFPA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4QE	ec	AP6233S-33UHFGA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QE	ec	AP6233S-33UHFPA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4QE	eh	AP6233S-33UHFGP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QE	eh	AP6233S-33UHFPP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4QF	-	AP6233S-33ULFGP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QF	-	AP6233S-33ULFPP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4QF	eb	AP6233S-33ULFGA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QF	eb	AP6233S-33ULFPA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4QF	ec	AP6233S-33ULFGA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QF	ec	AP6233S-33ULFPA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4QF	eh	AP6233S-33ULFGP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QF	eh	AP6233S-33ULFPP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4QG	-	AP6233S-33UHNGP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QG	-	AP6233S-33UHNPP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4QG	eb	AP6233S-33UHNGA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QG	eb	AP6233S-33UHNPA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4QG	ec	AP6233S-33UHNGA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QG	ec	AP6233S-33UHNPA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4QG	eh	AP6233S-33UHNGP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QG	eh	AP6233S-33UHNPP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4QH	-	AP6233S-33ULNGP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QH	-	AP6233S-33ULNPP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4QH	eb	AP6233S-33ULNGA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QH	eb	AP6233S-33ULNPA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4QH	ec	AP6233S-33ULNGA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QH	ec	AP6233S-33ULNPA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4QH	eh	AP6233S-33ULNGP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QH	eh	AP6233S-33ULNPP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4QJ	-	AP6233S-33DHFGP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QJ	-	AP6233S-33DHFPP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4QJ	eb	AP6233S-33DHFGA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QJ	eb	AP6233S-33DHFPA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4QJ	ec	AP6233S-33DHFGA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QJ	ec	AP6233S-33DHFPA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4QJ	eh	AP6233S-33DHFGP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QJ	eh	AP6233S-33DHFPP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4QK	-	AP6233S-33DLFGP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QK	-	AP6233S-33DLFPP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4QK	eb	AP6233S-33DLFGA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QK	eb	AP6233S-33DLFPA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4QK	ec	AP6233S-33DLFGA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QK	ec	AP6233S-33DLFPA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4QK	eh	AP6233S-33DLFGP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QK	eh	AP6233S-33DLFPP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4QL	-	AP6233S-33DHNGP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QL	-	AP6233S-33DHNPP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4QL	eb	AP6233S-33DHNGA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QL	eb	AP6233S-33DHNPA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4QL	ec	AP6233S-33DHNGA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QL	ec	AP6233S-33DHNPA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4QL	eh	AP6233S-33DHNGP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QL	eh	AP6233S-33DHNPP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4QM	-	AP6233S-33DLNGP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QM	-	AP6233S-33DLNPP	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4QM	eb	AP6233S-33DLNGA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QM	eb	AP6233S-33DLNPA	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4QM	ec	AP6233S-33DLNGA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4QM	ec	AP6233S-33DLNPA1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4QM	eh	AP6233S-33DLNGP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4QM	eh	AP6233S-33DLNPP1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4R	-	R1210N341A	DC-DC-IC	PWM step-up, 3.4V, 35..100kHz	SOT-23-5	28sc	DC3	6g	Ric
4R0	-	LN1193D31AKR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4R0	-	LN1193D31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4R0	-	XC9235E20CMR-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4R0	ej	XC6105E531MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4R1	-	LN1193D32AKR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4R1	-	LN1193D32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4R1	-	XC9235E21CMR-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4R1	ej	XC6105E532MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4R2	-	LN1193D33AKR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4R2	-	LN1193D33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4R2	-	XC9235E22CMR-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4R2	ej	XC6105E533MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4R3	-	LN1193D34AKR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4R3	-	LN1193D34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4R3	-	XC9235E23CMR-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4R3	ej	XC6105E534MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4R4	-	LN1193D35AKR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4R4	-	LN1193D35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4R4	-	XC9235E24CMR-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4R4	ej	XC6105E535MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4R5	-	LN1193D36AKR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4R5	-	LN1193D36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4R5	-	XC9235E25CMR-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4R5	ej	XC6105E536MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4R6	-	LN1193D37AKR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4R6	-	LN1193D37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4R6	-	XC9235E26CMR-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4R6	ej	XC6105E537MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4R7	-	LN1193D38AKR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4R7	-	LN1193D38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4R7	-	XC9235E27CMR-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4R7	ej	XC6105E538MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4R8	-	LN1193D39AKR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4R8	-	LN1193D39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4R8	-	XC9235E28CMR-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4R8	ej	XC6105E539MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4R9	-	LN1193D40AKR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4R9	-	LN1193D40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4R9	-	XC9235E29CMR-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4R9	ej	XC6105E540MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RA	-	LN1193D41AKR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RA	-	LN1193D41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RA	-	XC9235E2ACMR-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4RA	ej	XC6105E541MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RB	-	LN1193D42AKR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RB	-	LN1193D42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RB	-	XC9235E2BCMR-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4RB	ej	XC6105E542MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RC	-	LN1193D43AKR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RC	-	LN1193D43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RC	-	XC9235E2CCMR-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4RC	ej	XC6105E543MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RD	-	LN1193D44AKR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RD	-	LN1193D44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RD	-	XC9235E2DCMR-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4RD	ej	XC6105E544MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RE	-	LN1193D45AKR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RE	-	LN1193D45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RE	-	XC9235E2ECMR-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4RE	ej	XC6105E545MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RF	-	LN1193D46AKR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RF	-	LN1193D46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RF	-	XC9235E2FCMR-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4RF	ec	XC6105E516MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RF	ej	XC6105E546MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RH	-	LN1193D47AKR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RH	-	LN1193D47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RH	-	XC9235E2HCMR-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4RH	ec	XC6105E517MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RH	ej	XC6105E547MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RK	-	LN1193D48AKR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RK	-	LN1193D48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RK	-	XC9235E2KCMR-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4RK	ec	XC6105E518MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RK	ej	XC6105E548MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RL	-	LN1193D49AKR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RL	-	LN1193D49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RL	-	XC9235E2LCMR-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4RL	ec	XC6105E519MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RL	ej	XC6105E549MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RM	-	LN1193D50AKR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RM	-	LN1193D50AMR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RM	-	XC9235E2MCMR-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4RM	ec	XC6105E520MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RM	ej	XC6105E550MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RN	-	LN1193D51AKR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RN	-	LN1193D51AMR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RN	ec	XC6105E521MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RP	-	LN1193D52AKR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RP	-	LN1193D52AMR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RP	ec	XC6105E522MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RR	-	LN1193D53AKR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RR	-	LN1193D53AMR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RR	ec	XC6105E523MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RS	-	LN1193D54AKR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RS	-	LN1193D54AMR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RS	ec	XC6105E524MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RT	-	LN1193D55AKR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RT	-	LN1193D55AMR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RT	ec	XC6105E525MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RU	-	LN1193D56AKR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RU	-	LN1193D56AMR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RU	ec	XC6105E526MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RV	-	LN1193D57AKR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RV	-	LN1193D57AMR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RV	ec	XC6105E527MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RX	-	LN1193D58AKR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RX	-	LN1193D58AMR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RX	ec	XC6105E528MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RY	-	LN1193D59AKR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4RY	-	LN1193D59AMR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4RY	ec	XC6105E529MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4RZ	ec	XC6105E530MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4S	-	RN5RF14AA	LVR-IC	LRip, -CE, 1.4V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
4S0	-	XC9235E30CMR-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4S0	ej	XC6105E631MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4S1	-	XC9235E31CMR-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4S1	ej	XC6105E632MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4S2	-	XC9235E32CMR-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4S2	ej	XC6105E633MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4S3	-	XC9235E33CMR-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4S3	ej	XC6105E634MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4S4	-	XC9235E34CMR-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4S4	ej	XC6105E635MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4S5	-	XC9235E35CMR-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4S5	ej	XC6105E636MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4S6	-	XC9235E36CMR-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4S6	ej	XC6105E637MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4S7	-	XC9235E37CMR-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4S7	ej	XC6105E638MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4S8	-	XC9235E38CMR-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4S8	ej	XC6105E639MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4S9	-	XC9235E39CMR-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4S9	ej	XC6105E640MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SA	-	XC9235E3ACMR-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4SA	ej	XC6105E641MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SB	-	XC9235E3BCMR-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4SB	ej	XC6105E642MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SC	-	XC9235E3CCMR-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4SC	ej	XC6105E643MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SD	-	XC9235E3DCMR-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4SD	ej	XC6105E644MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SE	-	XC9235E3ECMR-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4SE	ej	XC6105E645MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SF	-	XC9235E3FCMR-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4SF	ec	XC6105E616MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SF	ej	XC6105E646MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SH	-	XC9235E3HCMR-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4SH	ec	XC6105E617MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SH	ej	XC6105E647MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SK	-	XC9235E3KCMR-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4SK	ec	XC6105E618MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SK	ej	XC6105E648MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SL	-	XC9235E3LCMR-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4SL	ec	XC6105E619MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SL	ej	XC6105E649MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SM	-	XC9235E3MCMR-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4SM	ec	XC6105E620MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SM	ej	XC6105E650MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SN	ec	XC6105E621MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SP	ec	XC6105E622MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SR	ec	XC6105E623MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SS	ec	XC6105E624MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4ST	ec	XC6105E625MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SU	ec	XC6105E626MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SV	ec	XC6105E627MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SX	ec	XC6105E628MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SY	ec	XC6105E629MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4SZ	ec	XC6105E630MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
4T	-	RN5RF14BA	LVR-IC	LRip, +CE, 1.4V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
4T0	-	XC9235E40CMR-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4T0	ej	XC6105F531MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4T1	ej	XC6105F532MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4T2	ej	XC6105F533MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4T3	ej	XC6105F534MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4T4	ej	XC6105F535MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4T5	ej	XC6105F536MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4T6	ej	XC6105F537MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4T7	ej	XC6105F538MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4T8	ej	XC6105F539MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4T9	ej	XC6105F540MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TA	ej	XC6105F541MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TB	ej	XC6105F542MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TC	ej	XC6105F543MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TD	ej	XC6105F544MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TE	ej	XC6105F545MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TF	ec	XC6105F516MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TF	ej	XC6105F546MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TH	ec	XC6105F517MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TH	ej	XC6105F547MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TK	ec	XC6105F518MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TK	ej	XC6105F548MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TL	ec	XC6105F519MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TL	ej	XC6105F549MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TM	ec	XC6105F520MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TM	ej	XC6105F550MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TN	ec	XC6105F521MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TP	ec	XC6105F522MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TR	ec	XC6105F523MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TS	ec	XC6105F524MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TT	ec	XC6105F525MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TU	ec	XC6105F526MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TV	ec	XC6105F527MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TX	ec	XC6105F528MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TY	ec	XC6105F529MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4TZ	ec	XC6105F530MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4U	-	R1210N241C	DC-DC-IC	PWM step-up, 2.4V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
4U0	ej	XC6105F631MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4U1	ej	XC6105F632MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4U2	ej	XC6105F633MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4U3	ej	XC6105F634MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4U4	ej	XC6105F635MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4U5	ej	XC6105F636MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4U6	ej	XC6105F637MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4U7	ej	XC6105F638MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4U8	-	XC9235E08DMR-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4U8	ej	XC6105F639MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4U9	-	XC9235E09DMR-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4U9	ej	XC6105F640MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UA	ej	XC6105F641MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UB	ej	XC6105F642MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UC	ej	XC6105F643MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UD	ej	XC6105F644MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UE	ej	XC6105F645MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UF	ec	XC6105F616MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UF	ej	XC6105F646MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UH	ec	XC6105F617MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UH	ej	XC6105F647MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UK	ec	XC6105F618MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UK	ej	XC6105F648MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UL	-	XC9235E0LDMR-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4UL	ec	XC6105F619MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UL	ej	XC6105F649MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UM	-	XC9235E0MDMR-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4UM	ec	XC6105F620MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UM	ej	XC6105F650MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UN	ec	XC6105F621MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UP	ec	XC6105F622MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UR	ec	XC6105F623MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4US	ec	XC6105F624MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UT	ec	XC6105F625MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UU	ec	XC6105F626MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UV	ec	XC6105F627MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UX	ec	XC6105F628MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UY	ec	XC6105F629MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4UZ	ec	XC6105F630MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
4V	-	R1210N501D	DC-DC-IC	PWM step-up, 5V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
4V0	-	TAR5S40	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
4V0	-	TAR5S40U	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
4V0	-	XC9235E10DMR-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4V0	ej	XC6105H631MR	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4V1	-	TAR5S41	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
4V1	-	TAR5S41U	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
4V1	-	XC9235E11DMR-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4V1	ej	XC6105H632MR	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4V2	-	TAR5S42	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
4V2	-	TAR5S42U	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
4V2	-	XC9235E12DMR-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4V2	ej	XC6105H633MR	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4V3	-	TAR5S43	LVR-IC	LDO, 4.3V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
4V3	-	TAR5S43U	LVR-IC	LDO, 4.3V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
4V3	-	XC9235E13DMR-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4V3	ej	XC6105H634MR	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4V4	-	TAR5S44	LVR-IC	LDO, 4.4V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
4V4	-	TAR5S44U	LVR-IC	LDO, 4.4V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
4V4	-	XC9235E14DMR-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4V4	ej	XC6105H635MR	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4V5	-	TAR5S45	LVR-IC	LDO, 4.5V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
4V5	-	TAR5S45U	LVR-IC	LDO, 4.5V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
4V5	-	XC9235E15DMR-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4V5	ej	XC6105H636MR	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4V6	-	TAR5S46	LVR-IC	LDO, 4.6V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
4V6	-	TAR5S46U	LVR-IC	LDO, 4.6V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
4V6	-	XC9235E16DMR-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4V6	ej	XC6105H637MR	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4V7	-	LN1234A082KR	LVR-IC	LDO, 0.8V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4V7	-	LN1234A082MR	LVR-IC	LDO, 0.8V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4V7	-	TAR5S47	LVR-IC	LDO, 4.7V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
4V7	-	TAR5S47U	LVR-IC	LDO, 4.7V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
4V7	-	XC9235E17DMR-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4V7	ej	XC6105H638MR	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4V8	-	LN1234A092KR	LVR-IC	LDO, 0.9V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4V8	-	LN1234A092MR	LVR-IC	LDO, 0.9V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4V8	-	TAR5S48	LVR-IC	LDO, 4.8V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
4V8	-	TAR5S48U	LVR-IC	LDO, 4.8V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
4V8	-	XC9235E18DMR-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4V8	ej	XC6105H639MR	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4V9	-	LN1134A102KR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4V9	-	LN1134A102MR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4V9	-	LN1193A102KR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4V9	-	LN1193A102MR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4V9	-	LN1234A102KR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4V9	-	LN1234A102MR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4V9	-	TAR5S49	LVR-IC	LDO, 4.9V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
4V9	-	TAR5S49U	LVR-IC	LDO, 4.9V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
4V9	-	XC9235E19DMR-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4V9	ej	XC6105H640MR	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VA	-	AP6233S-36NHFGP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VA	-	AP6233S-36NHFPP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4VA	-	LN1134A112KR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VA	-	LN1134A112MR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VA	-	LN1193A112KR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VA	-	LN1193A112MR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VA	-	LN1234A112KR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VA	-	LN1234A112MR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VA	-	XC9235E1ADMR-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4VA	eb	AP6233S-36NHFGA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VA	eb	AP6233S-36NHFPA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
4VA	ec	AP6233S-36NHFGA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VA	ec	AP6233S-36NHFPA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
4VA	eh	AP6233S-36NHFGP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VA	eh	AP6233S-36NHFPP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4VA	ej	XC6105H641MR	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VB	-	AP6233S-36NLFGP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VB	-	AP6233S-36NLFPP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4VB	-	LN1134A122KR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VB	-	LN1134A122MR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VB	-	LN1193A122KR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VB	-	LN1193A122MR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VB	-	LN1234A122KR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VB	-	LN1234A122MR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VB	-	XC9235E1BDMR-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4VB	eb	AP6233S-36NLFGA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VB	eb	AP6233S-36NLFPA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
4VB	ec	AP6233S-36NLFGA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VB	ec	AP6233S-36NLFPA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
4VB	eh	AP6233S-36NLFGP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VB	eh	AP6233S-36NLFPP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4VB	ej	XC6105H642MR	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VC	-	AP6233S-36NHNGP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VC	-	AP6233S-36NHNPP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
4VC	-	LN1134A132KR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VC	-	LN1134A132MR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VC	-	LN1193A132KR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VC	-	LN1193A132MR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VC	-	LN1234A132KR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VC	-	LN1234A132MR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VC	-	XC9235E1CDMR-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4VC	eb	AP6233S-36NHNGA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VC	eb	AP6233S-36NHNPA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
4VC	ec	AP6233S-36NHNGA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VC	ec	AP6233S-36NHNPA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
4VC	eh	AP6233S-36NHNGP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VC	eh	AP6233S-36NHNPP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
4VC	ej	XC6105H643MR	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VD	-	AP6233S-36NLNGP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VD	-	AP6233S-36NLNPP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
4VD	-	LN1134A142KR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VD	-	LN1134A142MR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VD	-	LN1193A142KR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VD	-	LN1193A142MR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VD	-	LN1234A142KR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VD	-	LN1234A142MR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4VD	-	XC9235E1DDMR-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4VD	eb	AP6233S-36NLNGA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VD	eb	AP6233S-36NLNPA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
4VD	ec	AP6233S-36NLNGA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VD	ec	AP6233S-36NLNPA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
4VD	eh	AP6233S-36NLNGP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VD	eh	AP6233S-36NLNPP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
4VD	ej	XC6105H644MR	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VE	-	AP6233S-36UHFGP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VE	-	AP6233S-36UHFPP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4VE	-	LN1134A152KR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VE	-	LN1134A152MR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VE	-	LN1193A152KR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VE	-	LN1193A152MR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VE	-	LN1234A152KR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VE	-	LN1234A152MR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VE	-	XC9235E1EDMR-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4VE	eb	AP6233S-36UHFGA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VE	eb	AP6233S-36UHFPA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4VE	ec	AP6233S-36UHFGA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VE	ec	AP6233S-36UHFPA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4VE	eh	AP6233S-36UHFGP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VE	eh	AP6233S-36UHFPP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4VE	ej	XC6105H645MR	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VF	-	AP6233S-36ULFGP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VF	-	AP6233S-36ULFPP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4VF	-	LN1134A162KR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VF	-	LN1134A162MR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VF	-	LN1193A162KR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VF	-	LN1193A162MR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VF	-	LN1234A162KR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VF	-	LN1234A162MR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VF	-	XC9235E1FDMR-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4VF	eb	AP6233S-36ULFGA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VF	eb	AP6233S-36ULFPA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4VF	ec	AP6233S-36ULFGA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VF	ec	AP6233S-36ULFPA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4VF	ec	XC6105H616MR	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VF	eh	AP6233S-36ULFGP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VF	eh	AP6233S-36ULFPP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4VF	ej	XC6105H646MR	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VG	-	AP6233S-36UHNGP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VG	-	AP6233S-36UHNPP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4VG	eb	AP6233S-36UHNGA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VG	eb	AP6233S-36UHNPA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4VG	ec	AP6233S-36UHNGA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VG	ec	AP6233S-36UHNPA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4VG	eh	AP6233S-36UHNGP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VG	eh	AP6233S-36UHNPP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4VH	-	AP6233S-36ULNGP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VH	-	AP6233S-36ULNPP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4VH	-	LN1134A172KR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VH	-	LN1134A172MR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VH	-	LN1193A172KR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VH	-	LN1193A172MR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VH	-	LN1234A172KR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VH	-	LN1234A172MR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VH	-	XC9235E1HDMR-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4VH	eb	AP6233S-36ULNGA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VH	eb	AP6233S-36ULNPA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4VH	ec	AP6233S-36ULNGA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VH	ec	AP6233S-36ULNPA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4VH	ec	XC6105H617MR	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VH	eh	AP6233S-36ULNGP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VH	eh	AP6233S-36ULNPP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4VH	ej	XC6105H647MR	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VJ	-	AP6233S-36DHFGP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VJ	-	AP6233S-36DHFPP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4VJ	eb	AP6233S-36DHFGA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VJ	eb	AP6233S-36DHFPA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4VJ	ec	AP6233S-36DHFGA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VJ	ec	AP6233S-36DHFPA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4VJ	eh	AP6233S-36DHFGP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VJ	eh	AP6233S-36DHFPP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4VK	-	AP6233S-36DLFGP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VK	-	AP6233S-36DLFPP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4VK	-	LN1134A182KR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VK	-	LN1134A182MR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VK	-	LN1193A182KR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VK	-	LN1193A182MR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VK	-	LN1234A182KR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VK	-	LN1234A182MR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VK	-	XC6204A182MR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4VK	-	XC9235E1KDMR-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4VK	eb	AP6233S-36DLFGA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VK	eb	AP6233S-36DLFPA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4VK	ec	AP6233S-36DLFGA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VK	ec	AP6233S-36DLFPA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4VK	ec	XC6105H618MR	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VK	eh	AP6233S-36DLFGP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VK	eh	AP6233S-36DLFPP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4VK	ej	XC6105H648MR	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VL	-	AP6233S-36DHNGP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VL	-	AP6233S-36DHNPP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4VL	-	LN1134A192KR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VL	-	LN1134A192MR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VL	-	LN1193A192KR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VL	-	LN1193A192MR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VL	-	XC6204A192MR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4VL	-	XC9235E1LDMR-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4VL	eb	AP6233S-36DHNGA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VL	eb	AP6233S-36DHNPA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4VL	ec	AP6233S-36DHNGA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VL	ec	AP6233S-36DHNPA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4VL	ec	XC6105H619MR	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VL	eh	AP6233S-36DHNGP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VL	eh	AP6233S-36DHNPP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4VL	ej	XC6105H649MR	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VM	-	AP6233S-36DLNGP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VM	-	AP6233S-36DLNPP	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4VM	-	LN1134A202KR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VM	-	LN1134A202MR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VM	-	LN1193A202KR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VM	-	LN1193A202MR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VM	-	XC6204A202MR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4VM	-	XC9235E1MDMR-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4VM	eb	AP6233S-36DLNGA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VM	eb	AP6233S-36DLNPA	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4VM	ec	AP6233S-36DLNGA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4VM	ec	AP6233S-36DLNPA1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4VM	ec	XC6105H620MR	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VM	eh	AP6233S-36DLNGP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4VM	eh	AP6233S-36DLNPP1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4VM	ej	XC6105H650MR	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VN	-	LN1134A212KR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VN	-	LN1134A212MR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VN	-	LN1193A212KR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VN	-	LN1193A212MR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VN	-	XC6204A212MR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4VN	ec	XC6105H621MR	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VP	-	LN1134A222KR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VP	-	LN1134A222MR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VP	-	LN1193A222KR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VP	-	LN1193A222MR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VP	-	XC6204A222MR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4VP	ec	XC6105H622MR	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VR	-	LN1134A232KR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VR	-	LN1134A232MR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VR	-	LN1193A232KR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VR	-	LN1193A232MR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4VR	-	XC6204A232MR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4VR	ec	XC6105H623MR	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VS	-	LN1134A242KR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VS	-	LN1134A242MR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VS	-	LN1193A242KR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VS	-	LN1193A242MR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VS	-	XC6204A242MR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4VS	ec	XC6105H624MR	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VT	-	LN1134A252KR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VT	-	LN1134A252MR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VT	-	LN1193A252KR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VT	-	LN1193A252MR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VT	-	XC6204A252MR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4VT	ec	XC6105H625MR	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VU	-	LN1134A262KR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VU	-	LN1134A262MR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VU	-	LN1193A262KR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VU	-	LN1193A262MR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VU	-	XC6204A262MR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4VU	ec	XC6105H626MR	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VV	-	LN1134A272KR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VV	-	LN1134A272MR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VV	-	LN1193A272KR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VV	-	LN1193A272MR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VV	-	XC6204A272MR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4VV	ec	XC6105H627MR	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VX	-	LN1134A282KR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VX	-	LN1134A282MR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VX	-	LN1193A282KR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VX	-	LN1193A282MR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VX	-	XC6204A282MR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4VX	ec	XC6105H628MR	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VY	-	LN1134A292KR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VY	-	LN1134A292MR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VY	-	LN1193A292KR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VY	-	LN1193A292MR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VY	-	XC6204A292MR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4VY	ec	XC6105H629MR	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4VZ	-	LN1134A302KR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
4VZ	-	LN1134A302MR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
4VZ	-	LN1193A302KR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR	SOT-353	28vrx	VR7	6g	Nln
4VZ	-	LN1193A302MR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Nln
4VZ	-	XC6204A302MR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
4VZ	ec	XC6105H630MR	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
4W	-	R1210N341C	DC-DC-IC	PWM step-up, 3.4V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
4X	-	R1210N441C	DC-DC-IC	PWM step-up, 4.3V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
4X0	-	XC9235E20DMR-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4X1	-	XC9235E21DMR-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4X2	-	XC9235E22DMR-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4X3	-	XC9235E23DMR-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4X4	-	XC9235E24DMR-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4X5	-	XC9235E25DMR-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4X6	-	XC9235E26DMR-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4X7	-	LN1234B082KR	LVR-IC	LDO, 0.8V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4X7	-	LN1234B082MR	LVR-IC	LDO, 0.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4X7	-	XC9235E27DMR-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4X8	-	LN1234B092KR	LVR-IC	LDO, 0.9V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4X8	-	LN1234B092MR	LVR-IC	LDO, 0.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4X8	-	XC9235E28DMR-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4X9	-	LN1134B102KR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4X9	-	LN1134B102MR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4X9	-	LN1193B102KR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4X9	-	LN1193B102MR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4X9	-	LN1234B102KR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4X9	-	LN1234B102MR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4X9	-	XC9235E29DMR-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4XA	-	LN1134B112KR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XA	-	LN1134B112MR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XA	-	LN1193B112KR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XA	-	LN1193B112MR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4XA	-	LN1234B112KR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XA	-	LN1234B112MR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XA	-	XC9235E2ADMR-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4XB	-	LN1134B122KR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XB	-	LN1134B122MR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XB	-	LN1193B122KR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XB	-	LN1193B122MR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XB	-	LN1234B122KR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XB	-	LN1234B122MR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XB	-	XC9235E2BDMR-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4XC	-	LN1134B132KR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XC	-	LN1134B132MR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XC	-	LN1193B132KR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XC	-	LN1193B132MR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XC	-	LN1234B132KR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XC	-	LN1234B132MR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XC	-	XC9235E2CDMR-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4XD	-	LN1134B142KR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XD	-	LN1134B142MR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XD	-	LN1193B142KR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XD	-	LN1193B142MR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XD	-	LN1234B142KR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XD	-	LN1234B142MR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XD	-	XC9235E2DDMR-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4XE	-	LN1134B152KR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XE	-	LN1134B152MR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XE	-	LN1193B152KR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XE	-	LN1193B152MR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XE	-	LN1234B152KR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XE	-	LN1234B152MR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XE	-	XC9235E2EDMR-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4XF	-	LN1134B162KR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XF	-	LN1134B162MR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XF	-	LN1193B162KR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XF	-	LN1193B162MR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XF	-	LN1234B162KR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XF	-	LN1234B162MR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XF	-	XC9235E2FDMR-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4XH	-	LN1134B172KR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XH	-	LN1134B172MR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XH	-	LN1193B172KR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XH	-	LN1193B172MR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XH	-	LN1234B172KR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XH	-	LN1234B172MR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XH	-	XC9235E2HDMR-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4XK	-	LN1134B182KR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XK	-	LN1134B182MR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XK	-	LN1193B182KR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XK	-	LN1193B182MR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XK	-	LN1234B182KR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XK	-	LN1234B182MR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XK	-	XC6204B182MR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4XK	-	XC9235E2KDMR-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4XL	-	LN1134B192KR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XL	-	LN1134B192MR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XL	-	LN1193B192KR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XL	-	LN1193B192MR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XL	-	XC6204B192MR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4XL	-	XC9235E2LDMR-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4XM	-	LN1134B202KR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XM	-	LN1134B202MR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XM	-	LN1193B202KR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XM	-	LN1193B202MR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XM	-	XC6204B202MR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4XM	-	XC9235E2MDMR-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4XN	-	LN1134B212KR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XN	-	LN1134B212MR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XN	-	LN1193B212KR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XN	-	LN1193B212MR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XN	-	XC6204B212MR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4XP	-	LN1134B222KR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XP	-	LN1134B222MR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XP	-	LN1193B222KR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XP	-	LN1193B222MR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XP	-	XC6204B222MR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4XR	-	LN1134B232KR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XR	-	LN1134B232MR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XR	-	LN1193B232KR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XR	-	LN1193B232MR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XR	-	XC6204B232MR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4XS	-	LN1134B242KR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XS	-	LN1134B242MR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XS	-	LN1193B242KR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XS	-	LN1193B242MR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XS	-	XC6204B242MR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4XT	-	LN1134B252KR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XT	-	LN1134B252MR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XT	-	LN1193B252KR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XT	-	LN1193B252MR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XT	-	XC6204B252MR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4XU	-	LN1134B262KR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XU	-	LN1134B262MR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XU	-	LN1193B262KR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XU	-	LN1193B262MR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XU	-	XC6204B262MR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4XV	-	LN1134B272KR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XV	-	LN1134B272MR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XV	-	LN1193B272KR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XV	-	LN1193B272MR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XV	-	XC6204B272MR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4XX	-	LN1134B282KR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XX	-	LN1134B282MR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XX	-	LN1193B282KR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XX	-	LN1193B282MR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XX	-	XC6204B282MR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4XY	-	LN1134B292KR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XY	-	LN1134B292MR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XY	-	LN1193B292KR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XY	-	LN1193B292MR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XY	-	XC6204B292MR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4XZ	-	LN1134B302KR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
4XZ	-	LN1134B302MR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
4XZ	-	LN1193B302KR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-353	28vrx	VR7	6g	Nln
4XZ	-	LN1193B302MR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Nln
4XZ	-	XC6204B302MR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
4Y	-	R1210N541C	DC-DC-IC	PWM step-up, 5.4V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
4Y0	-	XC9235E30DMR-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4Y1	-	XC9235E31DMR-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4Y2	-	XC9235E32DMR-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4Y3	-	XC9235E33DMR-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4Y4	-	XC9235E34DMR-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4Y5	-	XC9235E35DMR-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4Y6	-	XC9235E36DMR-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4Y7	-	LN1234C082KR	LVR-IC	LDO, 0.8V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4Y7	-	LN1234C082MR	LVR-IC	LDO, 0.8V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4Y7	-	XC9235E37DMR-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4Y8	-	LN1234C092KR	LVR-IC	LDO, 0.9V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4Y8	-	LN1234C092MR	LVR-IC	LDO, 0.9V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4Y8	-	XC9235E38DMR-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4Y9	-	LN1134C102KR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4Y9	-	LN1134C102MR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4Y9	-	LN1193C102KR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4Y9	-	LN1193C102MR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4Y9	-	LN1234C102KR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4Y9	-	LN1234C102MR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4Y9	-	XC9235E39DMR-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4YA	-	LN1134C112KR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YA	-	LN1134C112MR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YA	-	LN1193C112KR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YA	-	LN1193C112MR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4YA	-	LN1234C112KR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YA	-	LN1234C112MR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YA	-	XC9235E3ADMR-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4YB	-	LN1134C122KR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YB	-	LN1134C122MR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YB	-	LN1193C122KR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YB	-	LN1193C122MR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YB	-	LN1234C122KR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YB	-	LN1234C122MR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YB	-	XC9235E3BDMR-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4YC	-	LN1134C132KR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YC	-	LN1134C132MR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YC	-	LN1193C132KR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YC	-	LN1193C132MR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YC	-	LN1234C132KR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YC	-	LN1234C132MR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YC	-	XC9235E3CDMR-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4YD	-	LN1134C142KR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YD	-	LN1134C142MR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YD	-	LN1193C142KR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YD	-	LN1193C142MR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YD	-	LN1234C142KR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YD	-	LN1234C142MR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YD	-	XC9235E3DDMR-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4YE	-	LN1134C152KR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YE	-	LN1134C152MR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YE	-	LN1193C152KR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YE	-	LN1193C152MR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YE	-	LN1234C152KR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YE	-	LN1234C152MR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YE	-	XC9235E3EDMR-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4YF	-	LN1134C162KR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YF	-	LN1134C162MR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YF	-	LN1193C162KR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YF	-	LN1193C162MR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YF	-	LN1234C162KR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YF	-	LN1234C162MR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YF	-	XC9235E3FDMR-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4YH	-	LN1134C172KR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YH	-	LN1134C172MR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YH	-	LN1193C172KR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YH	-	LN1193C172MR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YH	-	LN1234C172KR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YH	-	LN1234C172MR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YH	-	XC9235E3HDMR-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4YK	-	LN1134C182KR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YK	-	LN1134C182MR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YK	-	LN1193C182KR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YK	-	LN1193C182MR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YK	-	LN1234C182KR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YK	-	LN1234C182MR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YK	-	XC6204C182MR	LVR-IC	LDO, 1.8V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4YK	-	XC9235E3KDMR-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4YL	-	LN1134C192KR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YL	-	LN1134C192MR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YL	-	LN1193C192KR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YL	-	LN1193C192MR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YL	-	XC6204C192MR	LVR-IC	LDO, 1.9V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4YL	-	XC9235E3LDMR-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4YM	-	LN1134C202KR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YM	-	LN1134C202MR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YM	-	LN1193C202KR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YM	-	LN1193C202MR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YM	-	XC6204C202MR	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4YM	-	XC9235E3MDMR-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4YN	-	LN1134C212KR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YN	-	LN1134C212MR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YN	-	LN1193C212KR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YN	-	LN1193C212MR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YN	-	XC6204C212MR	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4YP	-	LN1134C222KR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YP	-	LN1134C222MR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YP	-	LN1193C222KR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YP	-	LN1193C222MR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YP	-	XC6204C222MR	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4YR	-	LN1134C232KR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YR	-	LN1134C232MR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YR	-	LN1193C232KR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YR	-	LN1193C232MR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YR	-	XC6204C232MR	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4YS	-	LN1134C242KR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YS	-	LN1134C242MR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YS	-	LN1193C242KR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YS	-	LN1193C242MR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YS	-	XC6204C242MR	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4YT	-	LN1134C252KR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YT	-	LN1134C252MR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YT	-	LN1193C252KR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YT	-	LN1193C252MR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YT	-	XC6204C252MR	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4YU	-	LN1134C262KR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YU	-	LN1134C262MR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YU	-	LN1193C262KR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YU	-	LN1193C262MR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YU	-	XC6204C262MR	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4YV	-	LN1134C272KR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YV	-	LN1134C272MR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YV	-	LN1193C272KR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YV	-	LN1193C272MR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YV	-	XC6204C272MR	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4YX	-	LN1134C282KR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YX	-	LN1134C282MR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YX	-	LN1193C282KR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YX	-	LN1193C282MR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YX	-	XC6204C282MR	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4YY	-	LN1134C292KR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YY	-	LN1134C292MR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YY	-	LN1193C292KR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YY	-	LN1193C292MR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YY	-	XC6204C292MR	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4YZ	-	LN1134C302KR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
4YZ	-	LN1134C302MR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
4YZ	-	LN1193C302KR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR	SOT-353	28vrx	VR7	6g	Nln
4YZ	-	LN1193C302MR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR	SOT-23-5	28vrx	VR7	6g	Nln
4YZ	-	XC6204C302MR	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
4Z	-	R1210N241D	DC-DC-IC	PWM step-up, 2.4V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
4Z0	-	XC9235E40DMR-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
4Z7	-	LN1234D082KR	LVR-IC	LDO, 0.8V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4Z7	-	LN1234D082MR	LVR-IC	LDO, 0.8V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4Z8	-	LN1234D092KR	LVR-IC	LDO, 0.9V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4Z8	-	LN1234D092MR	LVR-IC	LDO, 0.9V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4Z9	-	LN1134D102KR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4Z9	-	LN1134D102MR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4Z9	-	LN1193D102KR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4Z9	-	LN1193D102MR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4Z9	-	LN1234D102KR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4Z9	-	LN1234D102MR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZA	-	AP6233S-50NHFGP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZA	-	AP6233S-50NHFPP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4ZA	-	LN1134D112KR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZA	-	LN1134D112MR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZA	-	LN1193D112KR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZA	-	LN1193D112MR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZA	-	LN1234D112KR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZA	-	LN1234D112MR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZA	eb	AP6233S-50NHFGA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZA	eb	AP6233S-50NHFPA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
4ZA	ec	AP6233S-50NHFGA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZA	ec	AP6233S-50NHFPA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL	SOT-25	28cx	VR4	6kb	Anw
4ZA	eh	AP6233S-50NHFGP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4ZA	eh	AP6233S-50NHFPP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4ZB	-	AP6233S-50NLFGP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZB	-	AP6233S-50NLFPP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4ZB	-	LN1134D122KR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZB	-	LN1134D122MR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZB	-	LN1193D122KR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZB	-	LN1193D122MR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZB	-	LN1234D122KR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZB	-	LN1234D122MR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZB	eb	AP6233S-50NLFGA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZB	eb	AP6233S-50NLFPA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
4ZB	ec	AP6233S-50NLFGA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZB	ec	AP6233S-50NLFPA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL	SOT-25	28cx	VR4	6kb	Anw
4ZB	eh	AP6233S-50NLFGP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZB	eh	AP6233S-50NLFPP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL	SC-70-5	28cx	VR4	6kb	Anw
4ZC	-	AP6233S-50NHNGP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZC	-	AP6233S-50NHNPP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
4ZC	-	LN1134D132KR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZC	-	LN1134D132MR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZC	-	LN1193D132KR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZC	-	LN1193D132MR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZC	-	LN1234D132KR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZC	-	LN1234D132MR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZC	eb	AP6233S-50NHNGA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZC	eb	AP6233S-50NHNPA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
4ZC	ec	AP6233S-50NHNGA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZC	ec	AP6233S-50NHNPA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE	SOT-25	28cx	VR4	6kb	Anw
4ZC	eh	AP6233S-50NHNGP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZC	eh	AP6233S-50NHNPP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE	SC-70-5	28cx	VR4	6kb	Anw
4ZD	-	AP6233S-50NLNGP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZD	-	AP6233S-50NLNPP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
4ZD	-	LN1134D142KR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZD	-	LN1134D142MR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZD	-	LN1193D142KR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZD	-	LN1193D142MR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZD	-	LN1234D142KR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZD	-	LN1234D142MR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZD	eb	AP6233S-50NLNGA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZD	eb	AP6233S-50NLNPA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
4ZD	ec	AP6233S-50NLNGA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZD	ec	AP6233S-50NLNPA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE	SOT-25	28cx	VR4	6kb	Anw
4ZD	eh	AP6233S-50NLNGP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZD	eh	AP6233S-50NLNPP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE	SC-70-5	28cx	VR4	6kb	Anw
4ZE	-	AP6233S-50UHFGP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZE	-	AP6233S-50UHFPP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4ZE	-	LN1134D152KR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZE	-	LN1134D152MR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZE	-	LN1193D152KR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZE	-	LN1193D152MR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZE	-	LN1234D152KR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZE	-	LN1234D152MR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZE	eb	AP6233S-50UHFGA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZE	eb	AP6233S-50UHFPA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4ZE	ec	AP6233S-50UHFGA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZE	ec	AP6233S-50UHFPA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4ZE	eh	AP6233S-50UHFGP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZE	eh	AP6233S-50UHFPP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4ZF	-	AP6233S-50ULFGP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZF	-	AP6233S-50ULFPP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4ZF	-	LN1134D162KR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZF	-	LN1134D162MR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZF	-	LN1193D162KR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZF	-	LN1193D162MR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZF	-	LN1234D162KR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZF	-	LN1234D162MR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZF	eb	AP6233S-50ULFGA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZF	eb	AP6233S-50ULFPA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4ZF	ec	AP6233S-50ULFGA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZF	ec	AP6233S-50ULFPA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL, PUR	SOT-25	28cx	VR4	6kb	Anw
4ZF	eh	AP6233S-50ULFGP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4ZF	eh	AP6233S-50ULFPP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL, PUR	SC-70-5	28cx	VR4	6kb	Anw
4ZG	-	AP6233S-50UHNGP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZG	-	AP6233S-50UHNPP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4ZG	eb	AP6233S-50UHNGA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZG	eb	AP6233S-50UHNPA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4ZG	ec	AP6233S-50UHNGA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZG	ec	AP6233S-50UHNPA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4ZG	eh	AP6233S-50UHNGP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZG	eh	AP6233S-50UHNPP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4ZH	-	AP6233S-50ULNGP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZH	-	AP6233S-50ULNPP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4ZH	-	LN1134D172KR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZH	-	LN1134D172MR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZH	-	LN1193D172KR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZH	-	LN1193D172MR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZH	-	LN1234D172KR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZH	-	LN1234D172MR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZH	eb	AP6233S-50ULNGA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZH	eb	AP6233S-50ULNPA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4ZH	ec	AP6233S-50ULNGA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, PUR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZH	ec	AP6233S-50ULNPA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, PUR	SOT-25	28cx	VR4	6kb	Anw
4ZH	eh	AP6233S-50ULNGP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, PUR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZH	eh	AP6233S-50ULNPP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, PUR	SC-70-5	28cx	VR4	6kb	Anw
4ZJ	-	AP6233S-50DHFGP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZJ	-	AP6233S-50DHFPP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4ZJ	eb	AP6233S-50DHFGA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZJ	eb	AP6233S-50DHFPA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4ZJ	ec	AP6233S-50DHFGA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZJ	ec	AP6233S-50DHFPA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4ZJ	eh	AP6233S-50DHFGP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZJ	eh	AP6233S-50DHFPP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4ZK	-	AP6233S-50DLFGP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZK	-	AP6233S-50DLFPP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4ZK	-	LN1134D182KR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZK	-	LN1134D182MR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZK	-	LN1193D182KR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZK	-	LN1193D182MR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZK	-	LN1234D182KR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZK	-	LN1234D182MR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZK	-	XC6204D182MR	LVR-IC	LDO, 1.8V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4ZK	eb	AP6233S-50DLFGA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZK	eb	AP6233S-50DLFPA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4ZK	ec	AP6233S-50DLFGA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZK	ec	AP6233S-50DLFPA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL, PDR	SOT-25	28cx	VR4	6kb	Anw
4ZK	eh	AP6233S-50DLFGP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZK	eh	AP6233S-50DLFPP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL, PDR	SC-70-5	28cx	VR4	6kb	Anw
4ZL	-	AP6233S-50DHNGP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZL	-	AP6233S-50DHNPP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4ZL	-	LN1134D192KR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZL	-	LN1134D192MR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZL	-	LN1193D192KR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZL	-	LN1193D192MR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZL	-	XC6204D192MR	LVR-IC	LDO, 1.9V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4ZL	eb	AP6233S-50DHNGA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZL	eb	AP6233S-50DHNPA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4ZL	ec	AP6233S-50DHNGA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZL	ec	AP6233S-50DHNPA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4ZL	eh	AP6233S-50DHNGP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZL	eh	AP6233S-50DHNPP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4ZM	-	AP6233S-50DLNGP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZM	-	AP6233S-50DLNPP	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4ZM	-	LN1134D202KR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZM	-	LN1134D202MR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZM	-	LN1193D202KR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZM	-	LN1193D202MR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZM	-	XC6204D202MR	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4ZM	eb	AP6233S-50DLNGA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZM	eb	AP6233S-50DLNPA	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw
4ZM	ec	AP6233S-50DLNGA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, PDR, Halogen-free	SOT-25	28cx	VR4	6ka	Anw
4ZM	ec	AP6233S-50DLNPA1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, PDR	SOT-25	28cx	VR4	6kb	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4ZM	eh	AP6233S-50DLNGP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, PDR, Halogen-free	SC-70-5	28cx	VR4	6ka	Anw
4ZM	eh	AP6233S-50DLNPP1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, PDR	SC-70-5	28cx	VR4	6kb	Anw
4ZN	-	LN1134D212KR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZN	-	LN1134D212MR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZN	-	LN1193D212KR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZN	-	LN1193D212MR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZN	-	XC6204D212MR	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4ZP	-	LN1134D222KR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZP	-	LN1134D222MR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZP	-	LN1193D222KR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZP	-	LN1193D222MR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZP	-	XC6204D222MR	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4ZR	-	LN1134D232KR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZR	-	LN1134D232MR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZR	-	LN1193D232KR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZR	-	LN1193D232MR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZR	-	XC6204D232MR	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4ZS	-	LN1134D242KR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZS	-	LN1134D242MR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZS	-	LN1193D242KR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZS	-	LN1193D242MR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZS	-	XC6204D242MR	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4ZT	-	LN1134D252KR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZT	-	LN1134D252MR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZT	-	LN1193D252KR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZT	-	LN1193D252MR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZT	-	XC6204D252MR	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4ZU	-	LN1134D262KR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZU	-	LN1134D262MR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZU	-	LN1193D262KR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZU	-	LN1193D262MR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZU	-	XC6204D262MR	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4ZV	-	LN1134D272KR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZV	-	LN1134D272MR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZV	-	LN1193D272KR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZV	-	LN1193D272MR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZV	-	XC6204D272MR	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4ZX	-	LN1134D282KR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZX	-	LN1134D282MR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZX	-	LN1193D282KR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZX	-	LN1193D282MR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZX	-	XC6204D282MR	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4ZY	-	LN1134D292KR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZY	-	LN1134D292MR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZY	-	LN1193D292KR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZY	-	LN1193D292MR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZY	-	XC6204D292MR	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
4ZZ	-	LN1134D302KR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
4ZZ	-	LN1134D302MR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
4ZZ	-	LN1193D302KR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SOT-353	28vrx	VR7	6g	Nln
4ZZ	-	LN1193D302MR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SOT-23-5	28vrx	VR7	6g	Nln
4ZZ	-	XC6204D302MR	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5.6Z	-	MAZZ056H	SA-Z-diode	Quad, 5.6V, 5mA, 200mW	SMini5	30	D16	6a	Pan
50	-	R1223N472F	DC-DC-IC	PWM/VFM step-down, +CE, 4.7V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
50	-	RN5RF50AA	LVR-IC	LRip, -CE, 5V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
50	-	RN5RZ50AA	LVR-IC	LDO, LN, 5V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
50	-	XC62EP5002MR-G	LVR-IC	LDO, boosted, 5.0V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
50	ea	XC62ER5002MR-G	LVR-IC	LDO, boosted, 5.0V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
50-	-	XC62HR5002MR-G	LVR-IC	LDO, 5.0V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
500	-	R1191N100B	LVR-IC	LDO, 10.0V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
500AC	-	BL8509-500ACRN	Vdet-IC	5.0V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
500AC	-	LC9009CB5TR500AC	Vdet-IC	5.0V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
500AN	-	BL8509-500ANRN	Vdet-IC	5.0V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
500AN	-	LC9009CB5TR500AN	Vdet-IC	5.0V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
500BC	-	BL8509-500BCRN	Vdet-IC	5.0V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
500BC	-	LC9009CB5TR500BC	Vdet-IC	5.0V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
500BN	-	BL8509-500BNRN	Vdet-IC	5.0V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
500BN	-	LC9009CB5TR500BN	Vdet-IC	5.0V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
500CC	-	BL8509-500CCRN	Vdet-IC	5.0V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
500CC	-	LC9009CB5TR500CC	Vdet-IC	5.0V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
500CN	-	BL8509-500CNRN	Vdet-IC	5.0V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
500CN	-	LC9009CB5TR500CN	Vdet-IC	5.0V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
500DC	-	BL8509-500DCRN	Vdet-IC	5.0V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
500DC	-	LC9009CB5TR500DC	Vdet-IC	5.0V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
500DN	-	BL8509-500DNRN	Vdet-IC	5.0V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
500DN	-	LC9009CB5TR500DN	Vdet-IC	5.0V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
500EC	-	BL8509-500ECRN	Vdet-IC	5.0V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
500EC	-	LC9009CB5TR500EC	Vdet-IC	5.0V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
500EN	-	BL8509-500ENRN	Vdet-IC	5.0V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
500EN	-	LC9009CB5TR500EN	Vdet-IC	5.0V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
500FC	-	BL8509-500FCRN	Vdet-IC	5.0V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
500FC	-	LC9009CB5TR500FC	Vdet-IC	5.0V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
500FN	-	BL8509-500FNRN	Vdet-IC	5.0V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
500FN	-	LC9009CB5TR500FN	Vdet-IC	5.0V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
500GC	-	BL8509-500GCRN	Vdet-IC	5.0V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
500GC	-	LC9009CB5TR500GC	Vdet-IC	5.0V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
500GN	-	BL8509-500GNRN	Vdet-IC	5.0V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
500GN	-	LC9009CB5TR500GN	Vdet-IC	5.0V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
501	-	R1191N101B	LVR-IC	LDO, 10.1V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
502	-	R1191N102B	LVR-IC	LDO, 10.2V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
503	-	R1191N103B	LVR-IC	LDO, 10.3V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
504	-	R1191N104B	LVR-IC	LDO, 10.4V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
505	-	R1191N105B	LVR-IC	LDO, 10.5V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
506	-	R1191N106B	LVR-IC	LDO, 10.6V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
507	-	R1191N107B	LVR-IC	LDO, 10.7V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
508	-	R1191N108B	LVR-IC	LDO, 10.8V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
509	-	R1191N109B	LVR-IC	LDO, 10.9V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
50A	-	AAT60050A-S5	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
50A	-	RP100N121B	LVR-IC	LDO, LN, 1.2V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50A	-	XC6127C55AMR	Vdet-IC	5.5V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
50-A	-	UTC8150-A	Vdet-IC	5.0V±2%, -Reset OCO	SOT-23-5	28vdz	VD6	6k	Utc
50B	-	AAT60050B-S5	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
50B	-	RP100N131B	LVR-IC	LDO, LN, 1.3V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50B	-	XC6127C55BMR	Vdet-IC	5.5V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
50-B	-	UTC8150-B	Vdet-IC	5.0V±2%, -Reset OCO	SOT-23-5	28vdm	VD6	6k	Utc
50C	-	AAT60050C-S5	Vdet-IC	5.0V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
50C	-	RP100N151B	LVR-IC	LDO, LN, 1.5V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50C	-	XC6127C55CMR	Vdet-IC	5.5V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
50D	-	AAT60050D-S5	Vdet-IC	5.0V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
50D	-	RP100N181B	LVR-IC	LDO, LN, 1.8V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50D	-	XC6127C55DMR	Vdet-IC	5.5V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
50E	-	RP100N181B5	LVR-IC	LDO, LN, 1.85V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50E	-	XC6127C55EMR	Vdet-IC	5.5V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
50F	-	RP100N191B	LVR-IC	LDO, LN, 1.9V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50F	-	XC6127C55FMR	Vdet-IC	5.5V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
50G	-	RP100N201B	LVR-IC	LDO, LN, 2.0V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50H	-	RP100N251B	LVR-IC	LDO, LN, 2.5V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50H	-	XC6127C55GMR	Vdet-IC	5.5V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
50J	-	RP100N261B	LVR-IC	LDO, LN, 2.6V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50K	-	RP100N271B	LVR-IC	LDO, LN, 2.7V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50K	-	TK71750S	LVR-IC	LDO, 5.0V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Tok
50K	-	XC6127C55HMR	Vdet-IC	5.5V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
50L	-	RP100N281B	LVR-IC	LDO, LN, 2.8V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50L	-	TK71650ASCL	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
50L	-	XC6127C55JMR	Vdet-IC	5.5V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
50M	-	RP100N281B5	LVR-IC	LDO, LN, 2.85V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50M	-	XC6127C55KMR	Vdet-IC	5.5V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
50N	-	RP100N291B	LVR-IC	LDO, LN, 2.9V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50P	-	RP100N301B	LVR-IC	LDO, LN, 3.0V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50Q	-	RP100N311B	LVR-IC	LDO, LN, 3.1V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50R	-	RP100N331B	LVR-IC	LDO, LN, 3.3V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50S	-	RP100N211B	LVR-IC	LDO, LN, 2.1V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50T	-	RP100N121B5	LVR-IC	LDO, LN, 1.25V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50T	-	TK71450S	LVR-IC	LDO, 5.0V±2%, 100mA, +CE, Ext. transistor	SOT-23-5	28zh	VR6	6a	Tok
50U	-	RP100N241B	LVR-IC	LDO, LN, 2.4V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
50V	-	RP100N221B	LVR-IC	LDO, LN, 2.2V±0.8%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
51	-	R1223N322F	DC-DC-IC	PWM/VFM step-down, +CE, 3.2V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
51	-	RN5RF51AA	LVR-IC	LRip, -CE, 5.1V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
51	-	RN5RZ51AA	LVR-IC	LDO, LN, 5.4V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
51	-	XC62EP5102MR-G	LVR-IC	LDO, boosted, 5.1V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
51	ea	XC62ER5102MR-G	LVR-IC	LDO, boosted, 5.1V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
51-	-	XC62HR5102MR-G	LVR-IC	LDO, 5.1V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
510	-	R1191N110B	LVR-IC	LDO, 11.0V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
510AC	-	BL8509-510ACRN	Vdet-IC	5.1V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
510AC	-	LC9009CB5TR510AC	Vdet-IC	5.1V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
510AN	-	BL8509-510ANRN	Vdet-IC	5.1V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
510AN	-	LC9009CB5TR510AN	Vdet-IC	5.1V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
510BC	-	BL8509-510BCRN	Vdet-IC	5.1V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
510BC	-	LC9009CB5TR510BC	Vdet-IC	5.1V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
510BN	-	BL8509-510BNRN	Vdet-IC	5.1V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
510BN	-	LC9009CB5TR510BN	Vdet-IC	5.1V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
510CC	-	BL8509-510CCRN	Vdet-IC	5.1V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
510CC	-	LC9009CB5TR510CC	Vdet-IC	5.1V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
510CN	-	BL8509-510CNRN	Vdet-IC	5.1V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
510CN	-	LC9009CB5TR510CN	Vdet-IC	5.1V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
510DC	-	BL8509-510DCRN	Vdet-IC	5.1V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
510DC	-	LC9009CB5TR510DC	Vdet-IC	5.1V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
510DN	-	BL8509-510DNRN	Vdet-IC	5.1V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
510DN	-	LC9009CB5TR510DN	Vdet-IC	5.1V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
510EC	-	BL8509-510ECRN	Vdet-IC	5.1V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
510EC	-	LC9009CB5TR510EC	Vdet-IC	5.1V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
510EN	-	BL8509-510ENRN	Vdet-IC	5.1V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
510EN	-	LC9009CB5TR510EN	Vdet-IC	5.1V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
510FC	-	BL8509-510FCRN	Vdet-IC	5.1V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
510FC	-	LC9009CB5TR510FC	Vdet-IC	5.1V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
510FN	-	BL8509-510FNRN	Vdet-IC	5.1V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
510FN	-	LC9009CB5TR510FN	Vdet-IC	5.1V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
510GC	-	BL8509-510GCRN	Vdet-IC	5.1V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
510GC	-	LC9009CB5TR510GC	Vdet-IC	5.1V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
510GN	-	BL8509-510GNRN	Vdet-IC	5.1V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
510GN	-	LC9009CB5TR510GN	Vdet-IC	5.1V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
511	-	R1191N111B	LVR-IC	LDO, 11.1V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
512	-	R1191N112B	LVR-IC	LDO, 11.2V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
513	-	R1191N113B	LVR-IC	LDO, 11.3V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
514	-	R1191N114B	LVR-IC	LDO, 11.4V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
515	-	R1114N151B	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
515	-	R1191N115B	LVR-IC	LDO, 11.5V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
515	eh	XC9111C151MR	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
516	-	R1114N161B	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
516	-	R1191N116B	LVR-IC	LDO, 11.6V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
516	eh	XC9111C161MR	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
517	-	R1114N171B	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
517	-	R1191N117B	LVR-IC	LDO, 11.7V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
517	eh	XC9111C171MR	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
518	-	R1114N181B	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
518	-	R1191N118B	LVR-IC	LDO, 11.8V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
518	eh	XC9111C181MR	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
519	-	R1114N191B	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
519	-	R1191N119B	LVR-IC	LDO, 11.9V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
519	eh	XC9111C191MR	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
51A	-	AAT60051A-S5	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
51A	-	RP100N121D	LVR-IC	LDO, LN, 1.2V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51B	-	AAT60051B-S5	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
51B	-	RP100N131D	LVR-IC	LDO, LN, 1.3V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51C	-	AAT60051C-S5	Vdet-IC	5.1V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
51C	-	RP100N151D	LVR-IC	LDO, LN, 1.5V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51D	-	AAT60051D-S5	Vdet-IC	5.1V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
51D	-	RP100N181D	LVR-IC	LDO, LN, 1.8V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51E	-	RP100N181D5	LVR-IC	LDO, LN, 1.85V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51F	-	RP100N191D	LVR-IC	LDO, LN, 1.9V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51G	-	RP100N201D	LVR-IC	LDO, LN, 2V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51H	-	RP100N251D	LVR-IC	LDO, LN, 2.5V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51J	-	RP100N261D	LVR-IC	LDO, LN, 2.6V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51K	-	RP100N271D	LVR-IC	LDO, LN, 2.7V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51L	-	RP100N281D	LVR-IC	LDO, LN, 2.8V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51L	-	TK71651ASCL	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
51M	-	RP100N281D5	LVR-IC	LDO, LN, 2.85V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51N	-	RP100N291D	LVR-IC	LDO, LN, 2.9V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51P	-	RP100N301D	LVR-IC	LDO, LN, 3.0V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51Q	-	RP100N311D	LVR-IC	LDO, LN, 3.1V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
51R	-	RP100N331D	LVR-IC	LDO, LN, 3.3V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51S	-	RP100N211D	LVR-IC	LDO, LN, 2.1V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51T	-	RP100N121D5	LVR-IC	LDO, LN, 1.25V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51U	-	RP100N241D	LVR-IC	LDO, LN, 2.4V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
51V	-	RP100N221D	LVR-IC	LDO, LN, 2.2V±0.8%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
52	-	R1223N482F	DC-DC-IC	PWM/VFM step-down, +CE, 4.8V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
52	-	RN5RF52AA	LVR-IC	LRip, -CE, 5.2V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
52	-	RN5RZ52AA	LVR-IC	LDO, LN, 5.2V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
52	-	XC62EP5202MR-G	LVR-IC	LDO, boosted, 5.2V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
52	ea	XC62ER5202MR-G	LVR-IC	LDO, boosted, 5.2V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
52-	-	XC62HR5202MR-G	LVR-IC	LDO, 5.2V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
520	-	R1114N201B	LVR-IC	LDO, Low noise, 2.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
520	-	R1191N120B	LVR-IC	LDO, 12.0V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
520	eh	XC9111C201MR	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
520AC	-	BL8509-520ACRN	Vdet-IC	5.2V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
520AC	-	LC9009CB5TR520AC	Vdet-IC	5.2V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
520AN	-	BL8509-520ANRN	Vdet-IC	5.2V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
520AN	-	LC9009CB5TR520AN	Vdet-IC	5.2V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
520BC	-	BL8509-520BCRN	Vdet-IC	5.2V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
520BC	-	LC9009CB5TR520BC	Vdet-IC	5.2V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
520BN	-	BL8509-520BNRN	Vdet-IC	5.2V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
520BN	-	LC9009CB5TR520BN	Vdet-IC	5.2V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
520CC	-	BL8509-520CCRN	Vdet-IC	5.2V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
520CC	-	LC9009CB5TR520CC	Vdet-IC	5.2V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
520CN	-	BL8509-520CNRN	Vdet-IC	5.2V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
520CN	-	LC9009CB5TR520CN	Vdet-IC	5.2V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
520DC	-	BL8509-520DCRN	Vdet-IC	5.2V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
520DC	-	LC9009CB5TR520DC	Vdet-IC	5.2V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
520DN	-	BL8509-520DNRN	Vdet-IC	5.2V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
520DN	-	LC9009CB5TR520DN	Vdet-IC	5.2V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
520EC	-	BL8509-520ECRN	Vdet-IC	5.2V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
520EC	-	LC9009CB5TR520EC	Vdet-IC	5.2V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
520EN	-	BL8509-520ENRN	Vdet-IC	5.2V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
520EN	-	LC9009CB5TR520EN	Vdet-IC	5.2V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
520FC	-	BL8509-520FCRN	Vdet-IC	5.2V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
520FC	-	LC9009CB5TR520FC	Vdet-IC	5.2V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
520FN	-	BL8509-520FNRN	Vdet-IC	5.2V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
520FN	-	LC9009CB5TR520FN	Vdet-IC	5.2V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
520GC	-	BL8509-520GCRN	Vdet-IC	5.2V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
520GC	-	LC9009CB5TR520GC	Vdet-IC	5.2V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
520GN	-	BL8509-520GNRN	Vdet-IC	5.2V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
520GN	-	LC9009CB5TR520GN	Vdet-IC	5.2V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
521	-	R1114N211B	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
521	-	R1191N121B	LVR-IC	LDO, 12.1V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
521	eh	XC9111C211MR	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
522	-	R1114N221B	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
522	-	R1191N122B	LVR-IC	LDO, 12.2V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
522	eh	XC9111C221MR	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
523	-	R1114N231B	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
523	-	R1191N123B	LVR-IC	LDO, 12.3V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
523	eh	XC9111C231MR	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
524	-	R1114N241B	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
524	-	R1191N124B	LVR-IC	LDO, 12.4V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
524	eh	XC9111C241MR	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
525	-	R1114N251B	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
525	-	R1191N125B	LVR-IC	LDO, 12.5V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
525	eh	XC9111C251MR	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
526	-	R1114N261B	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
526	-	R1191N126B	LVR-IC	LDO, 12.6V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
526	eh	XC9111C261MR	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
527	-	R1114N271B	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
527	-	R1191N127B	LVR-IC	LDO, 12.7V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
527	eh	XC9111C271MR	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
528	-	R1114N281B	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
528	-	R1191N128B	LVR-IC	LDO, 12.8V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
528	eh	XC9111C281MR	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
529	-	R1114N291B	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
529	-	R1191N129B	LVR-IC	LDO, 12.9V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
529	eh	XC9111C291MR	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
52A	-	AAT60052A-S5	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
52B	-	AAT60052B-S5	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
52C	-	AAT60052C-S5	Vdet-IC	5.2V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
52D	-	AAT60052D-S5	Vdet-IC	5.2V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
52L	-	TK71652ASCL	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
53	-	R1223N322H	DC-DC-IC	PWM step-down, +CE, 3.2V±2%, 500kHz, +Reset-prot.	SOT-23-5	28ud	DC7	6g	Ric
53	-	RN5RF53AA	LVR-IC	LRip, -CE, 5.3V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
53	-	RN5RZ53AA	LVR-IC	LDO, LN, 5.3V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
53	-	XC62EP5302MR-G	LVR-IC	LDO, boosted, 5.3V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
53	ea	XC62ER5302MR-G	LVR-IC	LDO, boosted, 5.3V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
53-	-	XC62HR5302MR-G	LVR-IC	LDO, 5.3V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
530	-	R1114N301B	LVR-IC	LDO, Low noise, 3.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
530	-	R1191N130B	LVR-IC	LDO, 13.0V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
530	eh	XC9111C301MR	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
530AC	-	BL8509-530ACRN	Vdet-IC	5.3V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
530AC	-	LC9009CB5TR530AC	Vdet-IC	5.3V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
530AN	-	BL8509-530ANRN	Vdet-IC	5.3V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
530AN	-	LC9009CB5TR530AN	Vdet-IC	5.3V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
530BC	-	BL8509-530BCRN	Vdet-IC	5.3V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
530BC	-	LC9009CB5TR530BC	Vdet-IC	5.3V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
530BN	-	BL8509-530BNRN	Vdet-IC	5.3V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
530BN	-	LC9009CB5TR530BN	Vdet-IC	5.3V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
530CC	-	BL8509-530CCRN	Vdet-IC	5.3V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
530CC	-	LC9009CB5TR530CC	Vdet-IC	5.3V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
530CN	-	BL8509-530CNRN	Vdet-IC	5.3V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
530CN	-	LC9009CB5TR530CN	Vdet-IC	5.3V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
530DC	-	BL8509-530DCRN	Vdet-IC	5.3V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
530DC	-	LC9009CB5TR530DC	Vdet-IC	5.3V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
530DN	-	BL8509-530DNRN	Vdet-IC	5.3V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
530DN	-	LC9009CB5TR530DN	Vdet-IC	5.3V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
530EC	-	BL8509-530ECRN	Vdet-IC	5.3V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
530EC	-	LC9009CB5TR530EC	Vdet-IC	5.3V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
530EN	-	BL8509-530ENRN	Vdet-IC	5.3V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
530EN	-	LC9009CB5TR530EN	Vdet-IC	5.3V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
530FC	-	BL8509-530FCRN	Vdet-IC	5.3V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
530FC	-	LC9009CB5TR530FC	Vdet-IC	5.3V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
530FN	-	BL8509-530FNRN	Vdet-IC	5.3V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
530FN	-	LC9009CB5TR530FN	Vdet-IC	5.3V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
530GC	-	BL8509-530GCRN	Vdet-IC	5.3V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
530GC	-	LC9009CB5TR530GC	Vdet-IC	5.3V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
530GN	-	BL8509-530GNRN	Vdet-IC	5.3V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
530GN	-	LC9009CB5TR530GN	Vdet-IC	5.3V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
531	-	R1114N311B	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
531	-	R1191N131B	LVR-IC	LDO, 13.1V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
531	eh	XC9111C311MR	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
5315	-	BL8553-15PARN	LVR-IC	LDO, 1.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5316	-	BL8553-16PARN	LVR-IC	LDO, 1.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5317	-	BL8553-17PARN	LVR-IC	LDO, 1.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5318	-	BL8553-18PARN	LVR-IC	LDO, 1.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5319	-	BL8553-19PARN	LVR-IC	LDO, 1.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
532	-	R1114N321B	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
532	-	R1191N132B	LVR-IC	LDO, 13.2V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
532	eh	XC9111C321MR	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
5320	-	BL8553-20PARN	LVR-IC	LDO, 2.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5321	-	BL8553-21PARN	LVR-IC	LDO, 2.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5322	-	BL8553-22PARN	LVR-IC	LDO, 2.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5323	-	BL8553-23PARN	LVR-IC	LDO, 2.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5324	-	BL8553-24PARN	LVR-IC	LDO, 2.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5325	-	BL8553-25PARN	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5326	-	BL8553-26PARN	LVR-IC	LDO, 2.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5327	-	BL8553-27PARN	LVR-IC	LDO, 2.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5328	-	BL8553-28PARN	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5329	-	BL8553-29PARN	LVR-IC	LDO, 2.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
533	-	R1114N331B	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
533	-	R1191N133B	LVR-IC	LDO, 13.3V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
533	eh	XC9111C331MR	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
5330	-	BL8553-30PARN	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5331	-	BL8553-31PARN	LVR-IC	LDO, 3.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5332	-	BL8553-32PARN	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5333	-	BL8553-33PARN	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5334	-	BL8553-34PARN	LVR-IC	LDO, 3.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5335	-	BL8553-35PARN	LVR-IC	LDO, 3.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5336	-	BL8553-36PARN	LVR-IC	LDO, 3.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5337	-	BL8553-37PARN	LVR-IC	LDO, 3.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5338	-	BL8553-38PARN	LVR-IC	LDO, 3.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5339	-	BL8553-39PARN	LVR-IC	LDO, 3.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
534	-	R1114N341B	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
534	-	R1191N134B	LVR-IC	LDO, 13.4V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
534	eh	XC9111C341MR	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
5340	-	BL8553-40PARN	LVR-IC	LDO, 4.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5341	-	BL8553-41PARN	LVR-IC	LDO, 4.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5342	-	BL8553-42PARN	LVR-IC	LDO, 4.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5343	-	BL8553-43PARN	LVR-IC	LDO, 4.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5344	-	BL8553-44PARN	LVR-IC	LDO, 4.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5345	-	BL8553-45PARN	LVR-IC	LDO, 4.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5346	-	BL8553-46PARN	LVR-IC	LDO, 4.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5347	-	BL8553-47PARN	LVR-IC	LDO, 4.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5348	-	BL8553-48PARN	LVR-IC	LDO, 4.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5349	-	BL8553-49PARN	LVR-IC	LDO, 4.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
535	-	R1114N351B	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
535	-	R1191N135B	LVR-IC	LDO, 13.5V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
535	eh	XC9111C351MR	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
5350	-	BL8553-50PARN	LVR-IC	LDO, 5.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5351	-	BL8553-51PARN	LVR-IC	LDO, 5.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5352	-	BL8553-52PARN	LVR-IC	LDO, 5.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5353	-	BL8553-53PARN	LVR-IC	LDO, 5.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5354	-	BL8553-54PARN	LVR-IC	LDO, 5.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5355	-	BL8553-55PARN	LVR-IC	LDO, 5.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5356	-	BL8553-56PARN	LVR-IC	LDO, 5.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5357	-	BL8553-57PARN	LVR-IC	LDO, 5.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5358	-	BL8553-58PARN	LVR-IC	LDO, 5.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
5359	-	BL8553-59PARN	LVR-IC	LDO, 5.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
536	-	R1114N361B	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
536	-	R1191N136B	LVR-IC	LDO, 13.6V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
536	eh	XC9111C361MR	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
5360	-	BL8553-60PARN	LVR-IC	LDO, 6.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6a	Shb
537	-	R1114N371B	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
537	-	R1191N137B	LVR-IC	LDO, 13.7V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
537	eh	XC9111C371MR	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
538	-	R1114N381B	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
538	-	R1191N138B	LVR-IC	LDO, 13.8V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
538	eh	XC9111C381MR	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
539	-	R1114N391B	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
539	-	R1191N139B	LVR-IC	LDO, 13.9V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
539	eh	XC9111C391MR	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
53A	-	AAT60053A-S5	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
53B	-	AAT60053B-S5	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
53C	-	AAT60053C-S5	Vdet-IC	5.3V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
53D	-	AAT60053D-S5	Vdet-IC	5.3V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
53L	-	TK71653ASCL	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
54	-	RN5RF54AA	LVR-IC	LRip, -CE, 5.4V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
54	-	RN5RZ54AA	LVR-IC	LDO, LN, 5.4V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
54	-	XC62EP5402MR-G	LVR-IC	LDO, boosted, 5.4V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
54	ea	XC62ER5402MR-G	LVR-IC	LDO, boosted, 5.4V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
54-	-	XC62HR5402MR-G	LVR-IC	LDO, 5.4V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
540	-	R1114N401B	LVR-IC	LDO, Low noise, 4.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
540	-	R1191N140B	LVR-IC	LDO, 14.0V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
540	eh	XC9111C401MR	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
540AC	-	BL8509-540ACRN	Vdet-IC	5.4V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
540AC	-	LC9009CB5TR540AC	Vdet-IC	5.4V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
540AN	-	BL8509-540ANRN	Vdet-IC	5.4V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
540AN	-	LC9009CB5TR540AN	Vdet-IC	5.4V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
540BC	-	BL8509-540BCRN	Vdet-IC	5.4V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
540BC	-	LC9009CB5TR540BC	Vdet-IC	5.4V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
540BN	-	BL8509-540BNRN	Vdet-IC	5.4V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
540BN	-	LC9009CB5TR540BN	Vdet-IC	5.4V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
540CC	-	BL8509-540CCRN	Vdet-IC	5.4V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
540CC	-	LC9009CB5TR540CC	Vdet-IC	5.4V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
540CN	-	BL8509-540CNRN	Vdet-IC	5.4V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
540CN	-	LC9009CB5TR540CN	Vdet-IC	5.4V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
540DC	-	BL8509-540DCRN	Vdet-IC	5.4V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
540DC	-	LC9009CB5TR540DC	Vdet-IC	5.4V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
540DN	-	BL8509-540DNRN	Vdet-IC	5.4V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
540DN	-	LC9009CB5TR540DN	Vdet-IC	5.4V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
540EC	-	BL8509-540ECRN	Vdet-IC	5.4V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
540EC	-	LC9009CB5TR540EC	Vdet-IC	5.4V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
540EN	-	BL8509-540ENRN	Vdet-IC	5.4V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
540EN	-	LC9009CB5TR540EN	Vdet-IC	5.4V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
540FC	-	BL8509-540FCRN	Vdet-IC	5.4V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
540FC	-	LC9009CB5TR540FC	Vdet-IC	5.4V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
540FN	-	BL8509-540FNRN	Vdet-IC	5.4V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
540FN	-	LC9009CB5TR540FN	Vdet-IC	5.4V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
540GC	-	BL8509-540GCRN	Vdet-IC	5.4V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
540GC	-	LC9009CB5TR540GC	Vdet-IC	5.4V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
540GN	-	BL8509-540GNRN	Vdet-IC	5.4V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
540GN	-	LC9009CB5TR540GN	Vdet-IC	5.4V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
541	-	R1114N281B5	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
541	-	R1191N141B	LVR-IC	LDO, 14.1V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
541	eh	XC9111C411MR	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
542	-	R1191N142B	LVR-IC	LDO, 14.2V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
542	eh	XC9111C421MR	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
543	-	R1191N143B	LVR-IC	LDO, 14.3V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
543	eh	XC9111C431MR	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
544	-	R1191N144B	LVR-IC	LDO, 14.4V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
544	eh	XC9111C441MR	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
545	-	R1191N145B	LVR-IC	LDO, 14.5V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
545	eh	XC9111C451MR	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
546	-	R1191N146B	LVR-IC	LDO, 14.6V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
546	eh	XC9111C461MR	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
547	-	R1191N147B	LVR-IC	LDO, 14.7V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
547	eh	XC9111C471MR	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
548	-	R1191N148B	LVR-IC	LDO, 14.8V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
548	eh	XC9111C481MR	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
549	-	R1191N149B	LVR-IC	LDO, 14.9V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
549	eh	XC9111C491MR	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
54A	-	AAT60054A-S5	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
54B	-	AAT60054B-S5	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
54C	-	AAT60054C-S5	Vdet-IC	5.4V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
54D	-	AAT60054D-S5	Vdet-IC	5.4V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
54L	-	TK71654ASCL	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
55	-	RN5RF55AA	LVR-IC	LRip, -CE, 5.5V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
55	-	RN5RZ55AA	LVR-IC	LDO, LN, 5.5V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
55	-	XC62EP5502MR-G	LVR-IC	LDO, boosted, 5.5V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
55	ea	XC62ER5502MR-G	LVR-IC	LDO, boosted, 5.5V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
55-	-	XC62HR5502MR-G	LVR-IC	LDO, 5.5V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
550	-	R1191N150B	LVR-IC	LDO, 15.0V±1.5%, 300mA, +CE, ECO	SOT-23-5	28ca	VR10	6g	Ric
550	eh	XC9111C501MR	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
550AC	-	BL8509-550ACRN	Vdet-IC	5.5V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
550AC	-	LC9009CB5TR550AC	Vdet-IC	5.5V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
550AN	-	BL8509-550ANRN	Vdet-IC	5.5V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
550AN	-	LC9009CB5TR550AN	Vdet-IC	5.5V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
550BC	-	BL8509-550BCRN	Vdet-IC	5.5V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
550BC	-	LC9009CB5TR550BC	Vdet-IC	5.5V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
550BN	-	BL8509-550BNRN	Vdet-IC	5.5V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
550BN	-	LC9009CB5TR550BN	Vdet-IC	5.5V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
550CC	-	BL8509-550CCRN	Vdet-IC	5.5V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
550CC	-	LC9009CB5TR550CC	Vdet-IC	5.5V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
550CN	-	BL8509-550CNRN	Vdet-IC	5.5V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
550CN	-	LC9009CB5TR550CN	Vdet-IC	5.5V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
550DC	-	BL8509-550DCRN	Vdet-IC	5.5V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
550DC	-	LC9009CB5TR550DC	Vdet-IC	5.5V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
550DN	-	BL8509-550DNRN	Vdet-IC	5.5V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
550DN	-	LC9009CB5TR550DN	Vdet-IC	5.5V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
550EC	-	BL8509-550ECRN	Vdet-IC	5.5V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
550EC	-	LC9009CB5TR550EC	Vdet-IC	5.5V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
550EN	-	BL8509-550ENRN	Vdet-IC	5.5V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
550EN	-	LC9009CB5TR550EN	Vdet-IC	5.5V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
550FC	-	BL8509-550FCRN	Vdet-IC	5.5V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
550FC	-	LC9009CB5TR550FC	Vdet-IC	5.5V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
550FN	-	BL8509-550FNRN	Vdet-IC	5.5V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
550FN	-	LC9009CB5TR550FN	Vdet-IC	5.5V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
550GC	-	BL8509-550GCRN	Vdet-IC	5.5V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
550GC	-	LC9009CB5TR550GC	Vdet-IC	5.5V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
550GN	-	BL8509-550GNRN	Vdet-IC	5.5V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
550GN	-	LC9009CB5TR550GN	Vdet-IC	5.5V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
551	eh	XC9111C511MR	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
552	eh	XC9111C521MR	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
553	eh	XC9111C531MR	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
554	eh	XC9111C541MR	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
555	eh	XC9111C551MR	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
556	eh	XC9111C561MR	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
557	eh	XC9111C571MR	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
558	eh	XC9111C581MR	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
559	eh	XC9111C591MR	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
55A	-	AAT60055A-S5	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
55B	-	AAT60055B-S5	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
55C	-	AAT60055C-S5	Vdet-IC	5.5V±1%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Aat
55D	-	AAT60055D-S5	Vdet-IC	5.5V±1%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Aat
56	-	RN5RF56AA	LVR-IC	LRip, -CE, 5.6V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
56	-	RN5RZ56AA	LVR-IC	LDO, LN, 5.6V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
56	-	XC62EP5602MR-G	LVR-IC	LDO, boosted, 5.6V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
56	ea	XC62ER5602MR-G	LVR-IC	LDO, boosted, 5.6V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
56-	-	XC62HR5602MR-G	LVR-IC	LDO, 5.6V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
560	eh	XC9111C601MR	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
560AC	-	BL8509-560ACRN	Vdet-IC	5.6V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
560AC	-	LC9009CB5TR560AC	Vdet-IC	5.6V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
560AN	-	BL8509-560ANRN	Vdet-IC	5.6V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
560AN	-	LC9009CB5TR560AN	Vdet-IC	5.6V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
560BC	-	BL8509-560BCRN	Vdet-IC	5.6V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
560BC	-	LC9009CB5TR560BC	Vdet-IC	5.6V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
560BN	-	BL8509-560BNRN	Vdet-IC	5.6V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
560BN	-	LC9009CB5TR560BN	Vdet-IC	5.6V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
560CC	-	BL8509-560CCRN	Vdet-IC	5.6V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
560CC	-	LC9009CB5TR560CC	Vdet-IC	5.6V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
560CN	-	BL8509-560CNRN	Vdet-IC	5.6V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
560CN	-	LC9009CB5TR560CN	Vdet-IC	5.6V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
560DC	-	BL8509-560DCRN	Vdet-IC	5.6V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
560DC	-	LC9009CB5TR560DC	Vdet-IC	5.6V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
560DN	-	BL8509-560DNRN	Vdet-IC	5.6V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
560DN	-	LC9009CB5TR560DN	Vdet-IC	5.6V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
560EC	-	BL8509-560ECRN	Vdet-IC	5.6V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
560EC	-	LC9009CB5TR560EC	Vdet-IC	5.6V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
560EN	-	BL8509-560ENRN	Vdet-IC	5.6V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
560EN	-	LC9009CB5TR560EN	Vdet-IC	5.6V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
560FC	-	BL8509-560FCRN	Vdet-IC	5.6V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
560FC	-	LC9009CB5TR560FC	Vdet-IC	5.6V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
560FN	-	BL8509-560FNRN	Vdet-IC	5.6V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
560FN	-	LC9009CB5TR560FN	Vdet-IC	5.6V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
560GC	-	BL8509-560GCRN	Vdet-IC	5.6V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
560GC	-	LC9009CB5TR560GC	Vdet-IC	5.6V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
560GN	-	BL8509-560GNRN	Vdet-IC	5.6V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
560GN	-	LC9009CB5TR560GN	Vdet-IC	5.6V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
561	eh	XC9111C611MR	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
562	eh	XC9111C621MR	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
563	eh	XC9111C631MR	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
564	eh	XC9111C641MR	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
565	eh	XC9111C651MR	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
566	eh	XC9111C661MR	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
567	eh	XC9111C671MR	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
568	eh	XC9111C681MR	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
569	eh	XC9111C691MR	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
57	-	RN5RF57AA	LVR-IC	LRip, -CE, 5.7V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
57	-	RN5RZ57AA	LVR-IC	LDO, LN, 5.7V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
57	-	XC62EP5702MR-G	LVR-IC	LDO, boosted, 5.7V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
57	ea	XC62ER5702MR-G	LVR-IC	LDO, boosted, 5.7V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
57-	-	XC62HR5702MR-G	LVR-IC	LDO, 5.7V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
570	eh	XC9111C701MR	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
570AC	-	BL8509-570ACRN	Vdet-IC	5.7V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
570AC	-	LC9009CB5TR570AC	Vdet-IC	5.7V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
570AN	-	BL8509-570ANRN	Vdet-IC	5.7V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
570AN	-	LC9009CB5TR570AN	Vdet-IC	5.7V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
570BC	-	BL8509-570BCRN	Vdet-IC	5.7V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
570BC	-	LC9009CB5TR570BC	Vdet-IC	5.7V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
570BN	-	BL8509-570BNRN	Vdet-IC	5.7V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
570BN	-	LC9009CB5TR570BN	Vdet-IC	5.7V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
570CC	-	BL8509-570CCRN	Vdet-IC	5.7V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
570CC	-	LC9009CB5TR570CC	Vdet-IC	5.7V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
570CN	-	BL8509-570CNRN	Vdet-IC	5.7V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
570CN	-	LC9009CB5TR570CN	Vdet-IC	5.7V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
570DC	-	BL8509-570DCRN	Vdet-IC	5.7V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
570DC	-	LC9009CB5TR570DC	Vdet-IC	5.7V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
570DN	-	BL8509-570DNRN	Vdet-IC	5.7V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
570DN	-	LC9009CB5TR570DN	Vdet-IC	5.7V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
570EC	-	BL8509-570ECRN	Vdet-IC	5.7V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
570EC	-	LC9009CB5TR570EC	Vdet-IC	5.7V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
570EN	-	BL8509-570ENRN	Vdet-IC	5.7V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
570EN	-	LC9009CB5TR570EN	Vdet-IC	5.7V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
570FC	-	BL8509-570FCRN	Vdet-IC	5.7V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
570FC	-	LC9009CB5TR570FC	Vdet-IC	5.7V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
570FN	-	BL8509-570FNRN	Vdet-IC	5.7V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
570FN	-	LC9009CB5TR570FN	Vdet-IC	5.7V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
570GC	-	BL8509-570GCRN	Vdet-IC	5.7V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
570GC	-	LC9009CB5TR570GC	Vdet-IC	5.7V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
570GN	-	BL8509-570GNRN	Vdet-IC	5.7V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
570GN	-	LC9009CB5TR570GN	Vdet-IC	5.7V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
58	-	RN5RF58AA	LVR-IC	LRip, -CE, 5.8V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
58	-	RN5RZ58AA	LVR-IC	LDO, LN, 5.8V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
58	-	XC62EP5802MR-G	LVR-IC	LDO, boosted, 5.8V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
58	ea	XC62ER5802MR-G	LVR-IC	LDO, boosted, 5.8V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
58-	-	XC62HR5802MR-G	LVR-IC	LDO, 5.8V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
580AC	-	BL8509-580ACRN	Vdet-IC	5.8V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
580AC	-	LC9009CB5TR580AC	Vdet-IC	5.8V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
580AN	-	BL8509-580ANRN	Vdet-IC	5.8V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
580AN	-	LC9009CB5TR580AN	Vdet-IC	5.8V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
580BC	-	BL8509-580BCRN	Vdet-IC	5.8V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
580BC	-	LC9009CB5TR580BC	Vdet-IC	5.8V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
580BN	-	BL8509-580BNRN	Vdet-IC	5.8V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
580BN	-	LC9009CB5TR580BN	Vdet-IC	5.8V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
580CC	-	BL8509-580CCRN	Vdet-IC	5.8V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
580CC	-	LC9009CB5TR580CC	Vdet-IC	5.8V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
580CN	-	BL8509-580CNRN	Vdet-IC	5.8V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
580CN	-	LC9009CB5TR580CN	Vdet-IC	5.8V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
580DC	-	BL8509-580DCRN	Vdet-IC	5.8V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
580DC	-	LC9009CB5TR580DC	Vdet-IC	5.8V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
580DN	-	BL8509-580DNRN	Vdet-IC	5.8V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
580DN	-	LC9009CB5TR580DN	Vdet-IC	5.8V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
580EC	-	BL8509-580ECRN	Vdet-IC	5.8V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
580EC	-	LC9009CB5TR580EC	Vdet-IC	5.8V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
580EN	-	BL8509-580ENRN	Vdet-IC	5.8V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
580EN	-	LC9009CB5TR580EN	Vdet-IC	5.8V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
580FC	-	BL8509-580FCRN	Vdet-IC	5.8V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
580FC	-	LC9009CB5TR580FC	Vdet-IC	5.8V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
580FN	-	BL8509-580FNRN	Vdet-IC	5.8V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
580FN	-	LC9009CB5TR580FN	Vdet-IC	5.8V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
580GC	-	BL8509-580GCRN	Vdet-IC	5.8V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
580GC	-	LC9009CB5TR580GC	Vdet-IC	5.8V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
580GN	-	BL8509-580GNRN	Vdet-IC	5.8V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
580GN	-	LC9009CB5TR580GN	Vdet-IC	5.8V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
59	-	74AUP1T97GW	CMOS-Log	Configurable gate with voltage-level translator	SOT-353-1	28	Log41	6a	Nxp
59	-	RN5RF59AA	LVR-IC	LRip, -CE, 5.9V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
59	-	RN5RZ59AA	LVR-IC	LDO, LN, 5.9V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
59	-	XC62EP5902MR-G	LVR-IC	LDO, boosted, 5.9V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
59	ea	XC62ER5902MR-G	LVR-IC	LDO, boosted, 5.9V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
59-	-	XC62HR5902MR-G	LVR-IC	LDO, 5.9V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
590AC	-	BL8509-590ACRN	Vdet-IC	5.9V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
590AC	-	LC9009CB5TR590AC	Vdet-IC	5.9V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
590AN	-	BL8509-590ANRN	Vdet-IC	5.9V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
590AN	-	LC9009CB5TR590AN	Vdet-IC	5.9V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
590BC	-	BL8509-590BCRN	Vdet-IC	5.9V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
590BC	-	LC9009CB5TR590BC	Vdet-IC	5.9V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
590BN	-	BL8509-590BNRN	Vdet-IC	5.9V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
590BN	-	LC9009CB5TR590BN	Vdet-IC	5.9V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
590CC	-	BL8509-590CCRN	Vdet-IC	5.9V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
590CC	-	LC9009CB5TR590CC	Vdet-IC	5.9V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
590CN	-	BL8509-590CNRN	Vdet-IC	5.9V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
590CN	-	LC9009CB5TR590CN	Vdet-IC	5.9V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
590DC	-	BL8509-590DCRN	Vdet-IC	5.9V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
590DC	-	LC9009CB5TR590DC	Vdet-IC	5.9V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
590DN	-	BL8509-590DNRN	Vdet-IC	5.9V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
590DN	-	LC9009CB5TR590DN	Vdet-IC	5.9V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
590EC	-	BL8509-590ECRN	Vdet-IC	5.9V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
590EC	-	LC9009CB5TR590EC	Vdet-IC	5.9V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
590EN	-	BL8509-590ENRN	Vdet-IC	5.9V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
590EN	-	LC9009CB5TR590EN	Vdet-IC	5.9V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
590FC	-	BL8509-590FCRN	Vdet-IC	5.9V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
590FC	-	LC9009CB5TR590FC	Vdet-IC	5.9V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
590FN	-	BL8509-590FNRN	Vdet-IC	5.9V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
590FN	-	LC9009CB5TR590FN	Vdet-IC	5.9V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
590GC	-	BL8509-590GCRN	Vdet-IC	5.9V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
590GC	-	LC9009CB5TR590GC	Vdet-IC	5.9V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
590GN	-	BL8509-590GNRN	Vdet-IC	5.9V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
590GN	-	LC9009CB5TR590GN	Vdet-IC	5.9V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
5A0	ej	XC6106A031MR	Vdet-IC	3.1V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5A1	ej	XC6106A032MR	Vdet-IC	3.2V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5A2	ej	XC6106A033MR	Vdet-IC	3.3V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5A3	ej	XC6106A034MR	Vdet-IC	3.4V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5A4	ej	XC6106A035MR	Vdet-IC	3.5V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5A5	ej	XC6106A036MR	Vdet-IC	3.6V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5A6	ej	XC6106A037MR	Vdet-IC	3.7V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5A7	ej	XC6106A038MR	Vdet-IC	3.8V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5A8	-	XC9236A08CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5A8	ej	XC6106A039MR	Vdet-IC	3.9V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5A9	-	XC9236A09CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5A9	ej	XC6106A040MR	Vdet-IC	4.0V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AA	-	XC6127C15AMR	Vdet-IC	1.5V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5AA	ej	XC6106A041MR	Vdet-IC	4.1V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AB	-	XC6127C15BMR	Vdet-IC	1.5V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5AB	ej	XC6106A042MR	Vdet-IC	4.2V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AC	-	XC6127C15CMR	Vdet-IC	1.5V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5AC	ej	XC6106A043MR	Vdet-IC	4.3V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AD	-	XC6127C15DMR	Vdet-IC	1.5V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5AD	ej	XC6106A044MR	Vdet-IC	4.4V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AE	-	XC6127C15EMR	Vdet-IC	1.5V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5AE	ej	XC6106A045MR	Vdet-IC	4.5V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AF	-	XC6127C15FMR	Vdet-IC	1.5V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5AF	ec	XC6106A016MR	Vdet-IC	1.6V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AF	ej	XC6106A046MR	Vdet-IC	4.6V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AH	-	XC6127C15GMR	Vdet-IC	1.5V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5AH	ec	XC6106A017MR	Vdet-IC	1.7V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AH	ej	XC6106A047MR	Vdet-IC	4.7V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AK	-	XC6127C15HMR	Vdet-IC	1.5V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5AK	ec	XC6106A018MR	Vdet-IC	1.8V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AK	ej	XC6106A048MR	Vdet-IC	4.8V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AL	-	XC6127C15JMR	Vdet-IC	1.5V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5AL	-	XC9236A0LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5AL	ec	XC6106A019MR	Vdet-IC	1.9V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AL	ej	XC6106A049MR	Vdet-IC	4.9V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AM	-	XC6127C15KMR	Vdet-IC	1.5V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5AM	-	XC9236A0MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5AM	ec	XC6106A020MR	Vdet-IC	2.0V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AM	ej	XC6106A050MR	Vdet-IC	5.0V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AN	-	XC6127C16AMR	Vdet-IC	1.6V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5AN	ec	XC6106A021MR	Vdet-IC	2.1V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AP	-	XC6127C16BMR	Vdet-IC	1.6V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5AP	ec	XC6106A022MR	Vdet-IC	2.2V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AR	-	XC6127C16CMR	Vdet-IC	1.6V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5AR	ec	XC6106A023MR	Vdet-IC	2.3V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AS	-	XC6127C16DMR	Vdet-IC	1.6V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5AS	ec	XC6106A024MR	Vdet-IC	2.4V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AT	-	XC6127C16EMR	Vdet-IC	1.6V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5AT	ec	XC6106A025MR	Vdet-IC	2.5V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5AU	-	XC6127C16FMR	Vdet-IC	1.6V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5AU	ec	XC6106A026MR	Vdet-IC	2.6V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AV	-	XC6127C16GMR	Vdet-IC	1.6V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5AV	ec	XC6106A027MR	Vdet-IC	2.7V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AX	-	XC6127C16HMR	Vdet-IC	1.6V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5AX	ec	XC6106A028MR	Vdet-IC	2.8V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AY	-	XC6127C16JMR	Vdet-IC	1.6V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5AY	ec	XC6106A029MR	Vdet-IC	2.9V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5AZ	-	XC6127C16KMR	Vdet-IC	1.6V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5AZ	ec	XC6106A030MR	Vdet-IC	3.0V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
5B	-	R3111N151A	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
5B	-	RN5RL25AA	LVR-IC	2.5V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
5B	eu	RN5VD15CA	Vdet-IC	1.5V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
5B0	-	TAR5SB50	LVR-IC	LDO, 5.0V±1%, 200mA, +CE	SSOP-5	28vrx	VR7	6a	Tos
5B0	-	XC9236A10CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5B0	ej	XC6106B031MR	Vdet-IC	3.1V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5B1	-	XC9236A11CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5B1	ej	XC6106B032MR	Vdet-IC	3.2V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5B2	-	XC9236A12CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5B2	ej	XC6106B033MR	Vdet-IC	3.3V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5B3	-	XC9236A13CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5B3	ej	XC6106B034MR	Vdet-IC	3.4V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5B4	-	XC9236A14CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5B4	ej	XC6106B035MR	Vdet-IC	3.5V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5B5	-	XC9236A15CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5B5	ej	XC6106B036MR	Vdet-IC	3.6V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5B6	-	XC9236A16CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5B6	ej	XC6106B037MR	Vdet-IC	3.7V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5B7	-	XC9236A17CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5B7	ej	XC6106B038MR	Vdet-IC	3.8V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5B8	-	XC9236A18CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5B8	ej	XC6106B039MR	Vdet-IC	3.9V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5B9	-	XC9236A19CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5B9	ej	XC6106B040MR	Vdet-IC	4.0V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BA	-	XC6127C17AMR	Vdet-IC	1.7V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5BA	-	XC9236A1ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5BA	ej	XC6106B041MR	Vdet-IC	4.1V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BB	-	XC6127C17BMR	Vdet-IC	1.7V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5BB	-	XC9236A1BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5BB	ej	XC6106B042MR	Vdet-IC	4.2V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BC	-	XC6127C17CMR	Vdet-IC	1.7V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5BC	-	XC9236A1CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5BC	ej	XC6106B043MR	Vdet-IC	4.3V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BD	-	XC6127C17DMR	Vdet-IC	1.7V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5BD	-	XC9236A1DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5BD	ej	XC6106B044MR	Vdet-IC	4.4V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BE	-	XC6127C17EMR	Vdet-IC	1.7V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5BE	-	XC9236A1ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5BE	ej	XC6106B045MR	Vdet-IC	4.5V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BF	-	XC6127C17FMR	Vdet-IC	1.7V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5BF	-	XC9236A1FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5BF	ec	XC6106B016MR	Vdet-IC	1.6V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BF	ej	XC6106B046MR	Vdet-IC	4.6V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BH	-	XC6127C17GMR	Vdet-IC	1.7V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5BH	-	XC9236A1HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5BH	ec	XC6106B017MR	Vdet-IC	1.7V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BH	ej	XC6106B047MR	Vdet-IC	4.7V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BK	-	XC6127C17HMR	Vdet-IC	1.7V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5BK	-	XC9236A1KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5BK	ec	XC6106B018MR	Vdet-IC	1.8V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BK	ej	XC6106B048MR	Vdet-IC	4.8V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BL	-	XC6127C17JMR	Vdet-IC	1.7V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5BL	-	XC9236A1LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5BL	ec	XC6106B019MR	Vdet-IC	1.9V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BL	ej	XC6106B049MR	Vdet-IC	4.9V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BM	-	XC6127C17KMR	Vdet-IC	1.7V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5BM	-	XC9236A1MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5BM	ec	XC6106B020MR	Vdet-IC	2.0V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BM	ej	XC6106B050MR	Vdet-IC	5.0V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BN	-	XC6127C18AMR	Vdet-IC	1.8V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5BN	ec	XC6106B021MR	Vdet-IC	2.1V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BP	-	XC6127C18BMR	Vdet-IC	1.8V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5BP	ec	XC6106B022MR	Vdet-IC	2.2V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BR	-	XC6127C18CMR	Vdet-IC	1.8V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5BR	ec	XC6106B023MR	Vdet-IC	2.3V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BS	-	XC6127C18DMR	Vdet-IC	1.8V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5BS	ec	XC6106B024MR	Vdet-IC	2.4V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BT	-	XC6127C18EMR	Vdet-IC	1.8V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5BT	ec	XC6106B025MR	Vdet-IC	2.5V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BU	-	XC6127C18FMR	Vdet-IC	1.8V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5BU	ec	XC6106B026MR	Vdet-IC	2.6V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BV	-	XC6127C18GMR	Vdet-IC	1.8V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5BV	ec	XC6106B027MR	Vdet-IC	2.7V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BX	-	XC6127C18HMR	Vdet-IC	1.8V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5BX	ec	XC6106B028MR	Vdet-IC	2.8V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BY	-	XC6127C18JMR	Vdet-IC	1.8V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5BY	ec	XC6106B029MR	Vdet-IC	2.9V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5BZ	-	XC6127C18KMR	Vdet-IC	1.8V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5BZ	ec	XC6106B030MR	Vdet-IC	3.0V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
5C	-	R3111N251A	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
5C	-	RN5RL35AA	LVR-IC	3.5V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
5C	eu	RN5VD25CA	Vdet-IC	2.5V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
5C0	-	XC9236A20CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5C0	ej	XC6106C031MR	Vdet-IC	3.1V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5C1	-	XC9236A21CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5C1	ej	XC6106C032MR	Vdet-IC	3.2V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5C2	-	XC9236A22CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5C2	ej	XC6106C033MR	Vdet-IC	3.3V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5C3	-	XC9236A23CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5C3	ej	XC6106C034MR	Vdet-IC	3.4V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5C4	-	XC9236A24CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5C4	ej	XC6106C035MR	Vdet-IC	3.5V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5C5	-	XC9236A25CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5C5	ej	XC6106C036MR	Vdet-IC	3.6V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5C6	-	XC9236A26CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5C6	ej	XC6106C037MR	Vdet-IC	3.7V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5C7	-	XC9236A27CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5C7	ej	XC6106C038MR	Vdet-IC	3.8V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5C8	-	XC9236A28CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5C8	ej	XC6106C039MR	Vdet-IC	3.9V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5C9	-	XC9236A29CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5C9	ej	XC6106C040MR	Vdet-IC	4.0V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CA	-	XC6127C19AMR	Vdet-IC	1.9V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5CA	-	XC9236A2ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5CA	ej	XC6106C041MR	Vdet-IC	4.1V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CB	-	XC6127C19BMR	Vdet-IC	1.9V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5CB	-	XC9236A2BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5CB	ej	XC6106C042MR	Vdet-IC	4.2V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CC	-	XC6127C19CMR	Vdet-IC	1.9V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5CC	-	XC9236A2CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5CC	ej	XC6106C043MR	Vdet-IC	4.3V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CD	-	XC6127C19DMR	Vdet-IC	1.9V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5CD	-	XC9236A2DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5CD	ej	XC6106C044MR	Vdet-IC	4.4V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CE	-	XC6127C19EMR	Vdet-IC	1.9V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5CE	-	XC9236A2ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5CE	ej	XC6106C045MR	Vdet-IC	4.5V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CF	-	XC6127C19FMR	Vdet-IC	1.9V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5CF	-	XC9236A2FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5CF	ec	XC6106C016MR	Vdet-IC	1.6V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CF	ej	XC6106C046MR	Vdet-IC	4.6V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CH	-	XC6127C19GMR	Vdet-IC	1.9V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5CH	-	XC9236A2HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5CH	ec	XC6106C017MR	Vdet-IC	1.7V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CH	ej	XC6106C047MR	Vdet-IC	4.7V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CK	-	XC6127C19HMR	Vdet-IC	1.9V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5CK	-	XC9236A2KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5CK	ec	XC6106C018MR	Vdet-IC	1.8V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CK	ej	XC6106C048MR	Vdet-IC	4.8V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CL	-	XC6127C19JMR	Vdet-IC	1.9V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5CL	-	XC9236A2LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5CL	ec	XC6106C019MR	Vdet-IC	1.9V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CL	ej	XC6106C049MR	Vdet-IC	4.9V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CM	-	XC6127C19KMR	Vdet-IC	1.9V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5CM	-	XC9236A2MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5CM	ec	XC6106C020MR	Vdet-IC	2.0V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CM	ej	XC6106C050MR	Vdet-IC	5.0V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CN	-	XC6127C20AMR	Vdet-IC	2.0V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5CN	ec	XC6106C021MR	Vdet-IC	2.1V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CP	-	XC6127C20BMR	Vdet-IC	2.0V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5CP	ec	XC6106C022MR	Vdet-IC	2.2V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CR	-	XC6127C20CMR	Vdet-IC	2.0V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5CR	ec	XC6106C023MR	Vdet-IC	2.3V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CS	-	XC6127C20DMR	Vdet-IC	2.0V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5CS	ec	XC6106C024MR	Vdet-IC	2.4V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CT	-	XC6127C20EMR	Vdet-IC	2.0V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5CT	ec	XC6106C025MR	Vdet-IC	2.5V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CU	-	XC6127C20FMR	Vdet-IC	2.0V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5CU	ec	XC6106C026MR	Vdet-IC	2.6V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CV	-	XC6127C20GMR	Vdet-IC	2.0V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5CV	ec	XC6106C027MR	Vdet-IC	2.7V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CX	-	XC6127C20HMR	Vdet-IC	2.0V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5CX	ec	XC6106C028MR	Vdet-IC	2.8V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CY	-	XC6127C20JMR	Vdet-IC	2.0V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5CY	ec	XC6106C029MR	Vdet-IC	2.9V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5CZ	-	XC6127C20KMR	Vdet-IC	2.0V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5CZ	ec	XC6106C030MR	Vdet-IC	3.0V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
5D	-	R3111N351A	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
5D	-	RN5RL45AA	LVR-IC	4.5V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
5D	eu	RN5VD35CA	Vdet-IC	3.5V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
5D0	-	XC9236A30CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5D0	ej	XC6106D031MR	Vdet-IC	3.1V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5D1	-	XC9236A31CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5D1	ej	XC6106D032MR	Vdet-IC	3.2V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5D2	-	XC9236A32CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5D2	ej	XC6106D033MR	Vdet-IC	3.3V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5D3	-	XC9236A33CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5D3	ej	XC6106D034MR	Vdet-IC	3.4V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5D4	-	XC9236A34CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5D4	ej	XC6106D035MR	Vdet-IC	3.5V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5D5	-	XC9236A35CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5D5	ej	XC6106D036MR	Vdet-IC	3.6V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5D6	-	XC9236A36CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5D6	ej	XC6106D037MR	Vdet-IC	3.7V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5D7	-	XC9236A37CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5D7	ej	XC6106D038MR	Vdet-IC	3.8V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5D8	-	XC9236A38CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5D8	ej	XC6106D039MR	Vdet-IC	3.9V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5D9	-	UM37549S	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5D9	-	XC9236A39CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5D9	ej	XC6106D040MR	Vdet-IC	4.0V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5Da	-	FT533Da	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
5DA	-	UM37537S	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DA	-	XC6127C21AMR	Vdet-IC	2.1V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5DA	-	XC9236A3ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5DA	ej	XC6106D041MR	Vdet-IC	4.1V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5Db	-	FT533Db	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
5DB	-	UM37534S	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DB	-	XC6127C21BMR	Vdet-IC	2.1V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5DB	-	XC9236A3BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5DB	ej	XC6106D042MR	Vdet-IC	4.2V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5Dc	-	FT533Dc	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
5DC	-	XC6127C21CMR	Vdet-IC	2.1V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5DC	-	XC9236A3CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5DC	ej	XC6106D043MR	Vdet-IC	4.3V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5Dd	-	FT533Dd	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
5DD	-	UM37532S	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DD	-	XC6127C21DMR	Vdet-IC	2.1V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5DD	-	XC9236A3DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5DD	ej	XC6106D044MR	Vdet-IC	4.4V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5De	-	FT533De	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
5DE	-	UM37533S	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DE	-	XC6127C21EMR	Vdet-IC	2.1V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5DE	-	XC9236A3ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5DE	ej	XC6106D045MR	Vdet-IC	4.5V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5Df	-	FT533Df	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
5DF	-	UM37535S	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DF	-	XC6127C21FMR	Vdet-IC	2.1V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5DF	-	XC9236A3FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5DF	ec	XC6106D016MR	Vdet-IC	1.6V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DF	ej	XC6106D046MR	Vdet-IC	4.6V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DH	-	UM37536S	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DH	-	XC6127C21GMR	Vdet-IC	2.1V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5DH	-	XC9236A3HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5DH	ec	XC6106D017MR	Vdet-IC	1.7V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DH	ej	XC6106D047MR	Vdet-IC	4.7V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DJ	-	UM37542S	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DK	-	XC6127C21HMR	Vdet-IC	2.1V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5DK	-	XC9236A3KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5DK	ec	XC6106D018MR	Vdet-IC	1.8V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DK	ej	XC6106D048MR	Vdet-IC	4.8V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DL	-	UM37538S	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DL	-	XC6127C21JMR	Vdet-IC	2.1V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5DL	-	XC9236A3LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5DL	ec	XC6106D019MR	Vdet-IC	1.9V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DL	ej	XC6106D049MR	Vdet-IC	4.9V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DM	-	UM37540S	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DM	-	XC6127C21KMR	Vdet-IC	2.1V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5DM	-	XC9236A3MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5DM	ec	XC6106D020MR	Vdet-IC	2.0V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DM	ej	XC6106D050MR	Vdet-IC	5.0V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DN	-	UM37543S	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DN	-	XC6127C22AMR	Vdet-IC	2.2V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5DN	ec	XC6106D021MR	Vdet-IC	2.1V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DP	-	UM37545S	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DP	-	XC6127C22BMR	Vdet-IC	2.2V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5DP	ec	XC6106D022MR	Vdet-IC	2.2V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DQ	-	UM37547S	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DR	-	UM37548S	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DR	-	XC6127C22CMR	Vdet-IC	2.2V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5DR	ec	XC6106D023MR	Vdet-IC	2.3V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DS	-	UM37550S	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DS	-	XC6127C22DMR	Vdet-IC	2.2V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5DS	ec	XC6106D024MR	Vdet-IC	2.4V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DT	-	UM37539S	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DT	-	XC6127C22EMR	Vdet-IC	2.2V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5DT	ec	XC6106D025MR	Vdet-IC	2.5V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DU	-	XC6127C22FMR	Vdet-IC	2.2V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5DU	ec	XC6106D026MR	Vdet-IC	2.6V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DV	-	UM37544S	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DV	-	XC6127C22GMR	Vdet-IC	2.2V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5DV	ec	XC6106D027MR	Vdet-IC	2.7V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DX	-	XC6127C22HMR	Vdet-IC	2.2V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5DX	ec	XC6106D028MR	Vdet-IC	2.8V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DY	-	UM37541S	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DY	-	XC6127C22JMR	Vdet-IC	2.2V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5DY	ec	XC6106D029MR	Vdet-IC	2.9V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5DZ	-	UM37546S	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5DZ	-	XC6127C22KMR	Vdet-IC	2.2V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5DZ	ec	XC6106D030MR	Vdet-IC	3.0V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
5E	-	R3111N451A	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
5E	-	RN5RL55AA	LVR-IC	5.5V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
5E	eu	RN5VD45CA	Vdet-IC	4.5V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
5E0	-	XC9236A40CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5E0	ej	XC6106E031MR	Vdet-IC	3.1V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5E1	ej	XC6106E032MR	Vdet-IC	3.2V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5E2	ej	XC6106E033MR	Vdet-IC	3.3V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5E3	ej	XC6106E034MR	Vdet-IC	3.4V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5E4	ej	XC6106E035MR	Vdet-IC	3.5V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5E5	ej	XC6106E036MR	Vdet-IC	3.6V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5E6	ej	XC6106E037MR	Vdet-IC	3.7V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5E7	ej	XC6106E038MR	Vdet-IC	3.8V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5E8	-	XC6205A09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5E8	ej	XC6106E039MR	Vdet-IC	3.9V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5E9	-	XC6205A10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5E9	ej	XC6106E040MR	Vdet-IC	4.0V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5Ea	-	FT533Ea	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
5EA	-	UM37531S	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5EA	-	XC6127C23AMR	Vdet-IC	2.3V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5EA	-	XC6205A11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5EA	ej	XC6106E041MR	Vdet-IC	4.1V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5Eb	-	FT533Eb	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
5EB	-	UM37529S	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5EB	-	XC6127C23BMR	Vdet-IC	2.3V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5EB	-	XC6205A12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5EB	ej	XC6106E042MR	Vdet-IC	4.2V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5Ec	-	FT533Ec	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
5EC	-	UM37520S	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5EC	-	XC6127C23CMR	Vdet-IC	2.3V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5EC	-	XC6205A13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5EC	ej	XC6106E043MR	Vdet-IC	4.3V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5Ed	-	FT533Ed	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
5ED	-	UM37512S	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5ED	-	XC6127C23DMR	Vdet-IC	2.3V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5ED	-	XC6205A14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5ED	ej	XC6106E044MR	Vdet-IC	4.4V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5Ee	-	FT533Ee	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
5EE	-	UM37513S	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5EE	-	XC6127C23EMR	Vdet-IC	2.3V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5EE	-	XC6205A15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5EE	ej	XC6106E045MR	Vdet-IC	4.5V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5Ef	-	FT533Ef	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
5EF	-	UM37519S	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5EF	-	XC6127C23FMR	Vdet-IC	2.3V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5EF	-	XC6205A16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5EF	ec	XC6106E016MR	Vdet-IC	1.6V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EF	ej	XC6106E046MR	Vdet-IC	4.6V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EH	-	UM37514S	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5EH	-	XC6127C23GMR	Vdet-IC	2.3V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5EH	-	XC6205A17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5EH	ec	XC6106E017MR	Vdet-IC	1.7V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EH	ej	XC6106E047MR	Vdet-IC	4.7V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EJ	-	UM37515S	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5EK	-	UM37518S	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5EK	-	XC6127C23HMR	Vdet-IC	2.3V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5EK	ec	XC6106E018MR	Vdet-IC	1.8V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EK	ej	XC6106E048MR	Vdet-IC	4.8V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EL	-	UM37516S	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5EL	-	XC6127C23JMR	Vdet-IC	2.3V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5EL	ec	XC6106E019MR	Vdet-IC	1.9V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EL	ej	XC6106E049MR	Vdet-IC	4.9V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EM	-	UM37517S	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5EM	-	XC6127C23KMR	Vdet-IC	2.3V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5EM	ec	XC6106E020MR	Vdet-IC	2.0V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EM	ej	XC6106E050MR	Vdet-IC	5.0V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EN	-	UM37525S	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5EN	-	XC6127C24AMR	Vdet-IC	2.4V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5EN	ec	XC6106E021MR	Vdet-IC	2.1V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EP	-	UM37527S	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5EP	-	XC6127C24BMR	Vdet-IC	2.4V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5EP	ec	XC6106E022MR	Vdet-IC	2.2V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EQ	-	UM37528S	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5ER	-	UM37530S	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5ER	-	XC6127C24CMR	Vdet-IC	2.4V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5ER	ec	XC6106E023MR	Vdet-IC	2.3V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5ES	-	UM37521S	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5ES	-	XC6127C24DMR	Vdet-IC	2.4V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5ES	ec	XC6106E024MR	Vdet-IC	2.4V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5ET	-	UM37522S	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5ET	-	XC6127C24EMR	Vdet-IC	2.4V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5ET	ec	XC6106E025MR	Vdet-IC	2.5V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EU	-	UM37524S	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5EU	-	XC6127C24FMR	Vdet-IC	2.4V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5EU	ec	XC6106E026MR	Vdet-IC	2.6V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EV	-	XC6127C24GMR	Vdet-IC	2.4V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5EV	ec	XC6106E027MR	Vdet-IC	2.7V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EX	-	XC6127C24HMR	Vdet-IC	2.4V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5EX	ec	XC6106E028MR	Vdet-IC	2.8V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EY	-	UM37523S	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5EY	-	XC6127C24JMR	Vdet-IC	2.4V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5EY	ec	XC6106E029MR	Vdet-IC	2.9V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5EZ	-	UM37526S	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6v	Uns
5EZ	-	XC6127C24KMR	Vdet-IC	2.4V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5EZ	ec	XC6106E030MR	Vdet-IC	3.0V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
5F	-	R3111N551A	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
5F	eu	RN5VD55CA	Vdet-IC	5.5V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
5F0	ej	XC6106F031MR	Vdet-IC	3.1V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5F1	ej	XC6106F032MR	Vdet-IC	3.2V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5F2	ej	XC6106F033MR	Vdet-IC	3.3V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5F3	ej	XC6106F034MR	Vdet-IC	3.4V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5F4	ej	XC6106F035MR	Vdet-IC	3.5V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5F5	ej	XC6106F036MR	Vdet-IC	3.6V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5F6	ej	XC6106F037MR	Vdet-IC	3.7V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5F7	ej	XC6106F038MR	Vdet-IC	3.8V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5F8	-	XC6205B09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5F8	-	XC9236A08DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5F8	ej	XC6106F039MR	Vdet-IC	3.9V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5F9	-	XC6205B10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5F9	-	XC9236A09DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5F9	ej	XC6106F040MR	Vdet-IC	4.0V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5Fa	-	FT533Fa	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
5FA	-	XC6127C25AMR	Vdet-IC	2.5V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5FA	-	XC6205B11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5FA	ej	XC6106F041MR	Vdet-IC	4.1V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5Fb	-	FT533Fb	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
5FB	-	XC6127C25BMR	Vdet-IC	2.5V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5FB	-	XC6205B12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5FB	ej	XC6106F042MR	Vdet-IC	4.2V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5Fc	-	FT533Fc	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
5FC	-	XC6127C25CMR	Vdet-IC	2.5V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5FC	-	XC6205B13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5FC	ej	XC6106F043MR	Vdet-IC	4.3V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5Fd	-	FT533Fd	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
5FD	-	XC6127C25DMR	Vdet-IC	2.5V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5FD	-	XC6205B14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5FD	ej	XC6106F044MR	Vdet-IC	4.4V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5Fe	-	FT533Fe	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
5FE	-	XC6127C25EMR	Vdet-IC	2.5V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5FE	-	XC6205B15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5FE	ej	XC6106F045MR	Vdet-IC	4.5V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5Ff	-	FT533Ff	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
5FF	-	XC6127C25FMR	Vdet-IC	2.5V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5FF	-	XC6205B16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5FF	ec	XC6106F016MR	Vdet-IC	1.6V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FF	ej	XC6106F046MR	Vdet-IC	4.6V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FH	-	XC6127C25GMR	Vdet-IC	2.5V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5FH	-	XC6205B17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5FH	ec	XC6106F017MR	Vdet-IC	1.7V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FH	ej	XC6106F047MR	Vdet-IC	4.7V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FK	-	XC6127C25HMR	Vdet-IC	2.5V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5FK	ec	XC6106F018MR	Vdet-IC	1.8V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FK	ej	XC6106F048MR	Vdet-IC	4.8V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FL	-	XC6127C25JMR	Vdet-IC	2.5V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5FL	-	XC9236A0LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5FL	ec	XC6106F019MR	Vdet-IC	1.9V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FL	ej	XC6106F049MR	Vdet-IC	4.9V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FM	-	XC6127C25KMR	Vdet-IC	2.5V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5FM	-	XC9236A0MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5FM	ec	XC6106F020MR	Vdet-IC	2.0V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FM	ej	XC6106F050MR	Vdet-IC	5.0V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5FN	-	XC6127C26AMR	Vdet-IC	2.6V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5FN	ec	XC6106F021MR	Vdet-IC	2.1V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FP	-	XC6127C26BMR	Vdet-IC	2.6V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5FP	ec	XC6106F022MR	Vdet-IC	2.2V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FR	-	XC6127C26CMR	Vdet-IC	2.6V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5FR	ec	XC6106F023MR	Vdet-IC	2.3V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FS	-	XC6127C26DMR	Vdet-IC	2.6V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5FS	ec	XC6106F024MR	Vdet-IC	2.4V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FT	-	XC6127C26EMR	Vdet-IC	2.6V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5FT	ec	XC6106F025MR	Vdet-IC	2.5V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FU	-	XC6127C26FMR	Vdet-IC	2.6V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5FU	ec	XC6106F026MR	Vdet-IC	2.6V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FV	-	XC6127C26GMR	Vdet-IC	2.6V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5FV	ec	XC6106F027MR	Vdet-IC	2.7V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FX	-	XC6127C26HMR	Vdet-IC	2.6V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5FX	ec	XC6106F028MR	Vdet-IC	2.8V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FY	-	XC6127C26JMR	Vdet-IC	2.6V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5FY	ec	XC6106F029MR	Vdet-IC	2.9V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5FZ	-	XC6127C26KMR	Vdet-IC	2.6V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5FZ	ec	XC6106F030MR	Vdet-IC	3.0V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
5Ga	-	FT533Ga	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
5Gb	-	FT533Gb	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
5Gc	-	FT533Gc	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
5Gd	-	FT533Gd	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
5Ge	-	FT533Ge	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
5Gf	-	FT533Gf	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
5H0	-	XC9236A10DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5H0	ej	XC6106H031MR	Vdet-IC	3.1V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5H1	-	XC9236A11DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5H1	ej	XC6106H032MR	Vdet-IC	3.2V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5H2	-	XC9236A12DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5H2	ej	XC6106H033MR	Vdet-IC	3.3V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5H3	-	XC9236A13DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5H3	ej	XC6106H034MR	Vdet-IC	3.4V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5H4	-	XC9236A14DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5H4	ej	XC6106H035MR	Vdet-IC	3.5V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5H5	-	XC9236A15DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5H5	ej	XC6106H036MR	Vdet-IC	3.6V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5H6	-	XC9236A16DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5H6	ej	XC6106H037MR	Vdet-IC	3.7V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5H7	-	XC9236A17DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5H7	ej	XC6106H038MR	Vdet-IC	3.8V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5H8	-	XC6205C09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5H8	-	XC9236A18DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5H8	ej	XC6106H039MR	Vdet-IC	3.9V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5H9	-	XC6205C10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5H9	-	XC9236A19DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5H9	ej	XC6106H040MR	Vdet-IC	4.0V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5Ha	-	FT533Ha	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
5HA	-	XC6127C27AMR	Vdet-IC	2.7V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5HA	-	XC6205C11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5HA	-	XC9236A1ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5HA	ej	XC6106H041MR	Vdet-IC	4.1V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5Hb	-	FT533Hb	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
5HB	-	XC6127C27BMR	Vdet-IC	2.7V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5HB	-	XC6205C12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5HB	-	XC9236A1BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5HB	ej	XC6106H042MR	Vdet-IC	4.2V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5Hc	-	FT533Hc	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
5HC	-	XC6127C27CMR	Vdet-IC	2.7V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5HC	-	XC6205C13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5HC	-	XC9236A1CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5HC	ej	XC6106H043MR	Vdet-IC	4.3V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5Hd	-	FT533Hd	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
5HD	-	XC6127C27DMR	Vdet-IC	2.7V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5HD	-	XC6205C14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5HD	-	XC9236A1DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5HD	ej	XC6106H044MR	Vdet-IC	4.4V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5He	-	FT533He	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
5HE	-	XC6127C27EMR	Vdet-IC	2.7V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5HE	-	XC6205C15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5HE	-	XC9236A1EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5HE	ej	XC6106H045MR	Vdet-IC	4.5V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5Hf	-	FT533Hf	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
5HF	-	XC6127C27FMR	Vdet-IC	2.7V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5HF	-	XC6205C16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5HF	-	XC9236A1FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5HF	ec	XC6106H016MR	Vdet-IC	1.6V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HF	ej	XC6106H046MR	Vdet-IC	4.6V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HH	-	XC6127C27GMR	Vdet-IC	2.7V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5HH	-	XC6205C17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5HH	-	XC9236A1HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5HH	ec	XC6106H017MR	Vdet-IC	1.7V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HH	ej	XC6106H047MR	Vdet-IC	4.7V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HK	-	XC6127C27HMR	Vdet-IC	2.7V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5HK	-	XC9236A1KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5HK	ec	XC6106H018MR	Vdet-IC	1.8V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HK	ej	XC6106H048MR	Vdet-IC	4.8V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HL	-	XC6127C27JMR	Vdet-IC	2.7V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5HL	-	XC9236A1LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5HL	ec	XC6106H019MR	Vdet-IC	1.9V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HL	ej	XC6106H049MR	Vdet-IC	4.9V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HM	-	XC6127C27KMR	Vdet-IC	2.7V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5HM	-	XC9236A1MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5HM	ec	XC6106H020MR	Vdet-IC	2.0V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HM	ej	XC6106H050MR	Vdet-IC	5.0V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HN	-	XC6127C28AMR	Vdet-IC	2.8V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5HN	ec	XC6106H021MR	Vdet-IC	2.1V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HP	-	XC6127C28BMR	Vdet-IC	2.8V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5HP	ec	XC6106H022MR	Vdet-IC	2.2V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HR	-	XC6127C28CMR	Vdet-IC	2.8V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5HR	ec	XC6106H023MR	Vdet-IC	2.3V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HS	-	XC6127C28DMR	Vdet-IC	2.8V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5HS	ec	XC6106H024MR	Vdet-IC	2.4V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HT	-	XC6127C28EMR	Vdet-IC	2.8V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5HT	ec	XC6106H025MR	Vdet-IC	2.5V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HU	-	XC6127C28FMR	Vdet-IC	2.8V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5HU	ec	XC6106H026MR	Vdet-IC	2.6V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HV	-	XC6127C28GMR	Vdet-IC	2.8V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5HV	ec	XC6106H027MR	Vdet-IC	2.7V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HX	-	XC6127C28HMR	Vdet-IC	2.8V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5HX	ec	XC6106H028MR	Vdet-IC	2.8V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HY	-	XC6127C28JMR	Vdet-IC	2.8V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5HY	ec	XC6106H029MR	Vdet-IC	2.9V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5HZ	-	XC6127C28KMR	Vdet-IC	2.8V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5HZ	ec	XC6106H030MR	Vdet-IC	3.0V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
5Ia	-	FT533Ia	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
5Ib	-	FT533Ib	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
5Ic	-	FT533Ic	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
5Id	-	FT533Id	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
5Ie	-	FT533Ie	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
5If	-	FT533If	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
5J	-	R3111N151C	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
5Ja	-	FT533Ja	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
5Jb	-	FT533Jb	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
5Jc	-	FT533Jc	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
5Jd	-	FT533Jd	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
5Je	-	FT533Je	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
5Jf	-	FT533Jf	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
5K	-	R3111N251C	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
5K0	-	XC9236A20DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5K1	-	XC9236A21DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5K2	-	XC9236A22DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5K3	-	XC9236A23DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5K4	-	XC9236A24DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5K5	-	XC9236A25DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5K6	-	XC9236A26DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5K7	-	XC9236A27DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5K8	-	XC6205D09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5K8	-	XC9236A28DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5K9	-	XC6205D10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5K9	-	XC9236A29DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5Ka	-	FT533Ka	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
5KA	-	XC6127C29AMR	Vdet-IC	2.9V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5KA	-	XC6205D11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5KA	-	XC9236A2ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5Kb	-	FT533Kb	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
5KB	-	XC6127C29BMR	Vdet-IC	2.9V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5KB	-	XC6205D12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5KB	-	XC9236A2BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5Kc	-	FT533Kc	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
5KC	-	XC6127C29CMR	Vdet-IC	2.9V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5KC	-	XC6205D13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5KC	-	XC9236A2CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5Kd	-	FT533Kd	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
5KD	-	XC6127C29DMR	Vdet-IC	2.9V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5KD	-	XC6205D14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5KD	-	XC9236A2DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5Ke	-	FT533Ke	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
5KE	-	XC6127C29EMR	Vdet-IC	2.9V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5KE	-	XC6205D15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5KE	-	XC9236A2EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5Kf	-	FT533Kf	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
5KF	-	XC6127C29FMR	Vdet-IC	2.9V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5KF	-	XC6205D16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5KF	-	XC9236A2FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5KH	-	XC6127C29GMR	Vdet-IC	2.9V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5KH	-	XC6205D17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5KH	-	XC9236A2HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5KK	-	XC6127C29HMR	Vdet-IC	2.9V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5KK	-	XC9236A2KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5KL	-	XC6127C29JMR	Vdet-IC	2.9V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5KL	-	XC9236A2LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5KM	-	XC6127C29KMR	Vdet-IC	2.9V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5KM	-	XC9236A2MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5KN	-	XC6127C30AMR	Vdet-IC	3.0V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5KP	-	XC6127C30BMR	Vdet-IC	3.0V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5KR	-	XC6127C30CMR	Vdet-IC	3.0V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5KS	-	XC6127C30DMR	Vdet-IC	3.0V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5KT	-	XC6127C30EMR	Vdet-IC	3.0V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5KU	-	XC6127C30FMR	Vdet-IC	3.0V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5KV	-	XC6127C30GMR	Vdet-IC	3.0V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5KX	-	XC6127C30HMR	Vdet-IC	3.0V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5KY	-	XC6127C30JMR	Vdet-IC	3.0V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5KZ	-	XC6127C30KMR	Vdet-IC	3.0V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5L	-	R3111N351C	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
5L0	-	XC9236A30DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5L1	-	S-75L00ANC	CMOS-Log	2-input NAND gate	SC-88A	28	Log1	6a	Sii
5L1	-	XC9236A31DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5L2	-	S-75L08ANC	CMOS-Log	2-input AND gate	SC-88A	28	Log3	6a	Sii
5L2	-	XC9236A32DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5L3	-	S-75L02ANC	CMOS-Log	2-input NOR gate	SC-88A	28	Log2	6a	Sii
5L3	-	XC9236A33DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5L4	-	S-75L32ANC	CMOS-Log	2-input OR gate	SC-88A	28	Log4	6a	Sii
5L4	-	XC9236A34DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5L5	-	S-75L04ANC	CMOS-Log	Inverter	SC-88A	28	Log6	6a	Sii
5L5	-	XC9236A35DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5L6	-	S-75LU04ANC	CMOS-Log	Inverter	SC-88A	28	Log6	6a	Sii
5L6	-	XC9236A36DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5L7	-	XC9236A37DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5L8	-	S-75L86ANC	CMOS-Log	2-input EXCLUSIVE-OR gate	SC-88A	28	Log5	6a	Sii
5L8	-	XC9236A38DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5L9	-	XC9236A39DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5LA	-	S-75L14ANC	CMOS-Log	Inverting Schmitt-trigger	SC-88A	28	Log7	6a	Sii
5LA	-	XC6127C31AMR	Vdet-IC	3.1V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5LA	-	XC9236A3ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5LB	-	XC6127C31BMR	Vdet-IC	3.1V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5LB	-	XC9236A3BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5LC	-	XC6127C31CMR	Vdet-IC	3.1V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5LC	-	XC9236A3CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5LD	-	XC6127C31DMR	Vdet-IC	3.1V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5LD	-	XC9236A3DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5LE	-	XC6127C31EMR	Vdet-IC	3.1V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5LE	-	XC9236A3EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5LF	-	XC6127C31FMR	Vdet-IC	3.1V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5LF	-	XC9236A3FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5LH	-	XC6127C31GMR	Vdet-IC	3.1V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5LH	-	XC9236A3HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5LK	-	XC6127C31HMR	Vdet-IC	3.1V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5LK	-	XC9236A3KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5LL	-	XC6127C31JMR	Vdet-IC	3.1V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5LL	-	XC9236A3LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5LM	-	XC6127C31KMR	Vdet-IC	3.1V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5LM	-	XC9236A3MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5LN	-	XC6127C32AMR	Vdet-IC	3.2V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5LP	-	XC6127C32BMR	Vdet-IC	3.2V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5LR	-	XC6127C32CMR	Vdet-IC	3.2V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5LS	-	XC6127C32DMR	Vdet-IC	3.2V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5LT	-	XC6127C32EMR	Vdet-IC	3.2V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5LU	-	XC6127C32FMR	Vdet-IC	3.2V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5LV	-	XC6127C32GMR	Vdet-IC	3.2V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5LX	-	XC6127C32HMR	Vdet-IC	3.2V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5LY	-	XC6127C32JMR	Vdet-IC	3.2V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5LZ	-	XC6127C32KMR	Vdet-IC	3.2V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5M	-	R3111N451C	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
5M0	-	XC9236A40DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
5MA	-	XC6127C33AMR	Vdet-IC	3.3V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5MB	-	XC6127C33BMR	Vdet-IC	3.3V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5MC	-	XC6127C33CMR	Vdet-IC	3.3V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5MD	-	XC6127C33DMR	Vdet-IC	3.3V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5ME	-	XC6127C33EMR	Vdet-IC	3.3V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5MF	-	XC6127C33FMR	Vdet-IC	3.3V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5MH	-	XC6127C33GMR	Vdet-IC	3.3V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5MK	-	XC6127C33HMR	Vdet-IC	3.3V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5ML	-	XC6127C33JMR	Vdet-IC	3.3V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5MM	-	XC6127C33KMR	Vdet-IC	3.3V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5MN	-	XC6127C34AMR	Vdet-IC	3.4V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5MP	-	XC6127C34BMR	Vdet-IC	3.4V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5MR	-	XC6127C34CMR	Vdet-IC	3.4V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5MS	-	XC6127C34DMR	Vdet-IC	3.4V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5MT	-	XC6127C34EMR	Vdet-IC	3.4V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5MU	-	XC6127C34FMR	Vdet-IC	3.4V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5MV	-	XC6127C34GMR	Vdet-IC	3.4V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5MX	-	XC6127C34HMR	Vdet-IC	3.4V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5MY	-	XC6127C34JMR	Vdet-IC	3.4V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5MZ	-	XC6127C34KMR	Vdet-IC	3.4V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5N	-	R3111N551C	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
5N8	-	XC9236E08CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5N9	-	XC9236E09CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5NA	-	XC6127C35AMR	Vdet-IC	3.5V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5NB	-	XC6127C35BMR	Vdet-IC	3.5V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5NC	-	XC6127C35CMR	Vdet-IC	3.5V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5ND	-	XC6127C35DMR	Vdet-IC	3.5V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5NE	-	XC6127C35EMR	Vdet-IC	3.5V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5NF	-	XC6127C35FMR	Vdet-IC	3.5V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5NH	-	XC6127C35GMR	Vdet-IC	3.5V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5NK	-	XC6127C35HMR	Vdet-IC	3.5V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5NL	-	XC6127C35JMR	Vdet-IC	3.5V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5NL	-	XC9236E0LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5NM	-	XC6127C35KMR	Vdet-IC	3.5V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5NM	-	XC9236E0MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5NN	-	XC6127C36AMR	Vdet-IC	3.6V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5NP	-	XC6127C36BMR	Vdet-IC	3.6V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5NR	-	XC6127C36CMR	Vdet-IC	3.6V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5NS	-	XC6127C36DMR	Vdet-IC	3.6V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5NT	-	XC6127C36EMR	Vdet-IC	3.6V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5NU	-	XC6127C36FMR	Vdet-IC	3.6V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5NV	-	XC6127C36GMR	Vdet-IC	3.6V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5NX	-	XC6127C36HMR	Vdet-IC	3.6V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5NY	-	XC6127C36JMR	Vdet-IC	3.6V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5NZ	-	XC6127C36KMR	Vdet-IC	3.6V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5P0	-	XC9236E10CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5P1	-	XC9236E11CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5P2	-	XC9236E12CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5P3	-	XC9236E13CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5P4	-	XC9236E14CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5P5	-	XC9236E15CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5P6	-	XC9236E16CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5P7	-	XC9236E17CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5P8	-	XC9236E18CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5P9	-	XC9236E19CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5PA	-	XC6127C37AMR	Vdet-IC	3.7V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5PA	-	XC9236E1ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5PB	-	XC6127C37BMR	Vdet-IC	3.7V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5PB	-	XC9236E1BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5PC	-	XC6127C37CMR	Vdet-IC	3.7V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5PC	-	XC9236E1CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5PD	-	XC6127C37DMR	Vdet-IC	3.7V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5PD	-	XC9236E1DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5PE	-	XC6127C37EMR	Vdet-IC	3.7V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5PE	-	XC9236E1ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5PF	-	XC6127C37FMR	Vdet-IC	3.7V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5PF	-	XC9236E1FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5PH	-	XC6127C37GMR	Vdet-IC	3.7V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5PH	-	XC9236E1HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5PK	-	XC6127C37HMR	Vdet-IC	3.7V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5PK	-	XC9236E1KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5PL	-	XC6127C37JMR	Vdet-IC	3.7V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5PL	-	XC9236E1LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5PM	-	XC6127C37KMR	Vdet-IC	3.7V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5PM	-	XC9236E1MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5PN	-	XC6127C38AMR	Vdet-IC	3.8V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5PP	-	XC6127C38BMR	Vdet-IC	3.8V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5PR	-	XC6127C38CMR	Vdet-IC	3.8V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5PS	-	XC6127C38DMR	Vdet-IC	3.8V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5PT	-	XC6127C38EMR	Vdet-IC	3.8V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5PU	-	XC6127C38FMR	Vdet-IC	3.8V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5PV	-	XC6127C38GMR	Vdet-IC	3.8V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5PX	-	XC6127C38HMR	Vdet-IC	3.8V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5PY	-	XC6127C38JMR	Vdet-IC	3.8V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5PZ	-	XC6127C38KMR	Vdet-IC	3.8V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5Q	-	R1210N251A	DC-DC-IC	PWM step-up, 2.5V, 35..100kHz	SOT-23-5	28sc	DC3	6g	Ric
5R	-	R1210N351A	DC-DC-IC	PWM step-up, 3.5V, 35..100kHz	SOT-23-5	28sc	DC3	6g	Ric
5R0	-	XC9236E20CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5R1	-	XC9236E21CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5R2	-	XC9236E22CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5R3	-	XC9236E23CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5R4	-	XC9236E24CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5R5	-	XC9236E25CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5R6	-	XC9236E26CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5R7	-	XC9236E27CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5R8	-	XC9236E28CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5R9	-	XC9236E29CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5RA	-	XC6127C39AMR	Vdet-IC	3.9V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5RA	-	XC9236E2ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5RB	-	XC6127C39BMR	Vdet-IC	3.9V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5RB	-	XC9236E2BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5RC	-	XC6127C39CMR	Vdet-IC	3.9V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5RC	-	XC9236E2CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5RD	-	XC6127C39DMR	Vdet-IC	3.9V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5RD	-	XC9236E2DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5RE	-	XC6127C39EMR	Vdet-IC	3.9V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5RE	-	XC9236E2ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5RF	-	XC6127C39FMR	Vdet-IC	3.9V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5RF	-	XC9236E2FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5RH	-	XC6127C39GMR	Vdet-IC	3.9V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5RH	-	XC9236E2HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5RK	-	XC6127C39HMR	Vdet-IC	3.9V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5RK	-	XC9236E2KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5RL	-	XC6127C39JMR	Vdet-IC	3.9V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5RL	-	XC9236E2LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5RM	-	XC6127C39KMR	Vdet-IC	3.9V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5RM	-	XC9236E2MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5RN	-	XC6127C40AMR	Vdet-IC	4.0V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5RP	-	XC6127C40BMR	Vdet-IC	4.0V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5RR	-	XC6127C40CMR	Vdet-IC	4.0V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5RS	-	XC6127C40DMR	Vdet-IC	4.0V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5RT	-	XC6127C40EMR	Vdet-IC	4.0V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5RU	-	XC6127C40FMR	Vdet-IC	4.0V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5RV	-	XC6127C40GMR	Vdet-IC	4.0V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5RX	-	XC6127C40HMR	Vdet-IC	4.0V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5RY	-	XC6127C40JMR	Vdet-IC	4.0V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5RZ	-	XC6127C40KMR	Vdet-IC	4.0V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5S0	-	XC9236E30CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5S1	-	XC9236E31CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5S2	-	XC9236E32CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5S3	-	XC9236E33CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5S4	-	XC9236E34CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5S5	-	XC9236E35CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5S6	-	XC9236E36CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5S7	-	XC9236E37CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5S8	-	XC9236E38CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5S9	-	XC9236E39CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5SA	-	XC6127C41AMR	Vdet-IC	4.1V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5SA	-	XC9236E3ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5SB	-	XC6127C41BMR	Vdet-IC	4.1V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5SB	-	XC9236E3BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5SC	-	XC6127C41CMR	Vdet-IC	4.1V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5SC	-	XC9236E3CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5SD	-	XC6127C41DMR	Vdet-IC	4.1V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5SD	-	XC9236E3DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5SE	-	XC6127C41EMR	Vdet-IC	4.1V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5SE	-	XC9236E3ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5SF	-	XC6127C41FMR	Vdet-IC	4.1V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5SF	-	XC9236E3FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5SH	-	XC6127C41GMR	Vdet-IC	4.1V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5SH	-	XC9236E3HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5SK	-	XC6127C41HMR	Vdet-IC	4.1V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5SK	-	XC9236E3KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5SL	-	XC6127C41JMR	Vdet-IC	4.1V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5SL	-	XC9236E3LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5SM	-	XC6127C41KMR	Vdet-IC	4.1V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5SM	-	XC9236E3MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5SN	-	XC6127C42AMR	Vdet-IC	4.2V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5SP	-	XC6127C42BMR	Vdet-IC	4.2V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5SR	-	XC6127C42CMR	Vdet-IC	4.2V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5SS	-	XC6127C42DMR	Vdet-IC	4.2V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5ST	-	XC6127C42EMR	Vdet-IC	4.2V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5SU	-	XC6127C42FMR	Vdet-IC	4.2V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5SV	-	XC6127C42GMR	Vdet-IC	4.2V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5SX	-	XC6127C42HMR	Vdet-IC	4.2V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5SY	-	XC6127C42JMR	Vdet-IC	4.2V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5SZ	-	XC6127C42KMR	Vdet-IC	4.2V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5T	-	RN5RF15BA	LVR-IC	LRip, +CE, 1.5V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
5T0	-	XC9236E40CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5TA	-	XC6127C43AMR	Vdet-IC	4.3V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5TB	-	XC6127C43BMR	Vdet-IC	4.3V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5TC	-	XC6127C43CMR	Vdet-IC	4.3V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5TD	-	XC6127C43DMR	Vdet-IC	4.3V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5TE	-	XC6127C43EMR	Vdet-IC	4.3V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5TF	-	XC6127C43FMR	Vdet-IC	4.3V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5TH	-	XC6127C43GMR	Vdet-IC	4.3V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5TK	-	XC6127C43HMR	Vdet-IC	4.3V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5TL	-	XC6127C43JMR	Vdet-IC	4.3V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5TM	-	XC6127C43KMR	Vdet-IC	4.3V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5TN	-	XC6127C44AMR	Vdet-IC	4.4V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5TP	-	XC6127C44BMR	Vdet-IC	4.4V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5TR	-	XC6127C44CMR	Vdet-IC	4.4V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5TS	-	XC6127C44DMR	Vdet-IC	4.4V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5TT	-	XC6127C44EMR	Vdet-IC	4.4V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5TU	-	XC6127C44FMR	Vdet-IC	4.4V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5TV	-	XC6127C44GMR	Vdet-IC	4.4V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5TX	-	XC6127C44HMR	Vdet-IC	4.4V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5TY	-	XC6127C44JMR	Vdet-IC	4.4V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5TZ	-	XC6127C44KMR	Vdet-IC	4.4V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5U	-	R1210N251C	DC-DC-IC	PWM step-up, 2.5V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
5U8	-	XC9236E08DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5U9	-	XC9236E09DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5UA	-	XC6127C45AMR	Vdet-IC	4.5V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5UB	-	XC6127C45BMR	Vdet-IC	4.5V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5UC	-	XC6127C45CMR	Vdet-IC	4.5V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5UD	-	XC6127C45DMR	Vdet-IC	4.5V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5UE	-	XC6127C45EMR	Vdet-IC	4.5V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5UF	-	XC6127C45FMR	Vdet-IC	4.5V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5UH	-	XC6127C45GMR	Vdet-IC	4.5V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5UK	-	XC6127C45HMR	Vdet-IC	4.5V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5UL	-	XC6127C45JMR	Vdet-IC	4.5V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5UL	-	XC9236E0LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5UM	-	XC6127C45KMR	Vdet-IC	4.5V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5UM	-	XC9236E0MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5UN	-	XC6127C46AMR	Vdet-IC	4.6V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5UP	-	XC6127C46BMR	Vdet-IC	4.6V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5UR	-	XC6127C46CMR	Vdet-IC	4.6V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5US	-	XC6127C46DMR	Vdet-IC	4.6V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5UT	-	XC6127C46EMR	Vdet-IC	4.6V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5UU	-	XC6127C46FMR	Vdet-IC	4.6V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5UV	-	XC6127C46GMR	Vdet-IC	4.6V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5UX	-	XC6127C46HMR	Vdet-IC	4.6V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5UY	-	XC6127C46JMR	Vdet-IC	4.6V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5UZ	-	XC6127C46KMR	Vdet-IC	4.6V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5V0	-	TAR5S50	LVR-IC	LDO, 5.0V±1%, 200mA, +CE	SSOP-5	28un	VR7	6a	Tos
5V0	-	TAR5S50U	LVR-IC	LDO, 5.0V±1%, 200mA, +CE	SSOP-5-P	30un	VR7	6a	Tos
5V0	-	XC9236E10DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5V1	-	S-75V00ANC	CMOS-Log	2-input NAND gate	SC-88A	28	Log1	6a	Sii
5V1	-	XC9236E11DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5V2	-	S-75V08ANC	CMOS-Log	2-input AND gate	SC-88A	28	Log3	6a	Sii
5V2	-	XC9236E12DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5V3	-	S-75V02ANC	CMOS-Log	2-input NOR gate	SC-88A	28	Log2	6a	Sii
5V3	-	XC9236E13DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5V4	-	S-75V32ANC	CMOS-Log	2-input OR gate	SC-88A	28	Log4	6a	Sii
5V4	-	XC9236E14DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5V5	-	S-75V04ANC	CMOS-Log	Inverter	SC-88A	28	Log6	6a	Sii
5V5	-	XC9236E15DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5V6	-	S-75VU04ANC	CMOS-Log	Inverter	SC-88A	28	Log6	6a	Sii
5V6	-	XC9236E16DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5V7	-	XC9236E17DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5V8	-	S-75V86ANC	CMOS-Log	2-input EXCLUSIVE-OR gate	SC-88A	28	Log5	6a	Sii
5V8	-	XC6205A092MR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5V8	-	XC9236E18DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5V9	-	XC6205A102MR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5V9	-	XC9236E19DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5VA	-	S-75V14ANC	CMOS-Log	Inverting Schmitt-trigger	SC-88A	28	Log7	6a	Sii
5VA	-	XC6127C47AMR	Vdet-IC	4.7V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5VA	-	XC6205A112MR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5VA	-	XC9236E1ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5VB	-	XC6127C47BMR	Vdet-IC	4.7V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5VB	-	XC6205A122MR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5VB	-	XC9236E1BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5VC	-	XC6127C47CMR	Vdet-IC	4.7V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5VC	-	XC6205A132MR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5VC	-	XC9236E1CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5VD	-	XC6127C47DMR	Vdet-IC	4.7V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5VD	-	XC6205A142MR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5VD	-	XC9236E1DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5VE	-	XC6127C47EMR	Vdet-IC	4.7V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5VE	-	XC6205A152MR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5VE	-	XC9236E1EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5VF	-	XC6127C47FMR	Vdet-IC	4.7V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5VF	-	XC6205A162MR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5VF	-	XC9236E1FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5VH	-	XC6127C47GMR	Vdet-IC	4.7V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5VH	-	XC6205A172MR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
5VH	-	XC9236E1HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5VK	-	XC6127C47HMR	Vdet-IC	4.7V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5VK	-	XC9236E1KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5VL	-	XC6127C47JMR	Vdet-IC	4.7V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5VL	-	XC9236E1LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5VM	-	XC6127C47KMR	Vdet-IC	4.7V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5VM	-	XC9236E1MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5VN	-	XC6127C48AMR	Vdet-IC	4.8V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5VP	-	XC6127C48BMR	Vdet-IC	4.8V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5VR	-	XC6127C48CMR	Vdet-IC	4.8V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5VS	-	XC6127C48DMR	Vdet-IC	4.8V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5VT	-	XC6127C48EMR	Vdet-IC	4.8V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5VU	-	XC6127C48FMR	Vdet-IC	4.8V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5VV	-	XC6127C48GMR	Vdet-IC	4.8V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5VX	-	XC6127C48HMR	Vdet-IC	4.8V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5VY	-	XC6127C48JMR	Vdet-IC	4.8V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5VZ	-	XC6127C48KMR	Vdet-IC	4.8V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5W	-	R1210N351C	DC-DC-IC	PWM step-up, 3.5V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
5X	-	R1210N451C	DC-DC-IC	PWM step-up, 4.4V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
5X0	-	XC9236E20DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5X1	-	XC9236E21DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5X2	-	XC9236E22DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5X3	-	XC9236E23DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5X4	-	XC9236E24DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5X5	-	XC9236E25DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5X6	-	XC9236E26DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5X7	-	XC9236E27DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5X8	-	XC6205B092MR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5X8	-	XC9236E28DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5X9	-	XC6205B102MR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5X9	-	XC9236E29DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5XA	-	XC6127C49AMR	Vdet-IC	4.9V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5XA	-	XC6205B112MR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5XA	-	XC9236E2ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5XB	-	XC6127C49BMR	Vdet-IC	4.9V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5XB	-	XC6205B122MR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5XB	-	XC9236E2BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5XC	-	XC6127C49CMR	Vdet-IC	4.9V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5XC	-	XC6205B132MR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5XC	-	XC9236E2CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5XD	-	XC6127C49DMR	Vdet-IC	4.9V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5XD	-	XC6205B142MR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5XD	-	XC9236E2DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5XE	-	XC6127C49EMR	Vdet-IC	4.9V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5XE	-	XC6205B152MR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5XE	-	XC9236E2EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5XF	-	XC6127C49FMR	Vdet-IC	4.9V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5XF	-	XC6205B162MR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5XF	-	XC9236E2FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5XH	-	XC6127C49GMR	Vdet-IC	4.9V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5XH	-	XC6205B172MR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
5XH	-	XC9236E2HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5XK	-	XC6127C49HMR	Vdet-IC	4.9V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5XK	-	XC9236E2KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5XL	-	XC6127C49JMR	Vdet-IC	4.9V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5XL	-	XC9236E2LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5XM	-	XC6127C49KMR	Vdet-IC	4.9V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5XM	-	XC9236E2MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5XN	-	XC6127C50AMR	Vdet-IC	5.0V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5XP	-	XC6127C50BMR	Vdet-IC	5.0V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5XR	-	XC6127C50CMR	Vdet-IC	5.0V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5XS	-	XC6127C50DMR	Vdet-IC	5.0V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5XT	-	XC6127C50EMR	Vdet-IC	5.0V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5XU	-	XC6127C50FMR	Vdet-IC	5.0V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5XV	-	XC6127C50GMR	Vdet-IC	5.0V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5XX	-	XC6127C50HMR	Vdet-IC	5.0V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5XY	-	XC6127C50JMR	Vdet-IC	5.0V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5XZ	-	XC6127C50KMR	Vdet-IC	5.0V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5Y	-	R1210N551C	DC-DC-IC	PWM step-up, 5.5V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
5Y0	-	XC9236E30DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5Y1	-	XC9236E31DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5Y2	-	XC9236E32DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5Y3	-	XC9236E33DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5Y4	-	XC9236E34DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5Y5	-	XC9236E35DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5Y6	-	XC9236E36DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5Y7	-	XC9236E37DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5Y8	-	XC6205C092MR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5Y8	-	XC9236E38DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5Y9	-	XC6205C102MR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5Y9	-	XC9236E39DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5YA	-	XC6127C51AMR	Vdet-IC	5.1V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5YA	-	XC6205C112MR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5YA	-	XC9236E3ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5YB	-	XC6127C51BMR	Vdet-IC	5.1V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5YB	-	XC6205C122MR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5YB	-	XC9236E3BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5YC	-	XC6127C51CMR	Vdet-IC	5.1V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5YC	-	XC6205C132MR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5YC	-	XC9236E3CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5YD	-	XC6127C51DMR	Vdet-IC	5.1V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5YD	-	XC6205C142MR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5YD	-	XC9236E3DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5YE	-	XC6127C51EMR	Vdet-IC	5.1V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5YE	-	XC6205C152MR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5YE	-	XC9236E3EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5YF	-	XC6127C51FMR	Vdet-IC	5.1V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5YF	-	XC6205C162MR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5YF	-	XC9236E3FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5YH	-	XC6127C51GMR	Vdet-IC	5.1V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5YH	-	XC6205C172MR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
5YH	-	XC9236E3HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5YK	-	XC6127C51HMR	Vdet-IC	5.1V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5YK	-	XC9236E3KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5YL	-	XC6127C51JMR	Vdet-IC	5.1V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5YL	-	XC9236E3LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5YM	-	XC6127C51KMR	Vdet-IC	5.1V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5YM	-	XC9236E3MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5YN	-	XC6127C52AMR	Vdet-IC	5.2V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5YP	-	XC6127C52BMR	Vdet-IC	5.2V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5YR	-	XC6127C52CMR	Vdet-IC	5.2V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5YS	-	XC6127C52DMR	Vdet-IC	5.2V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5YT	-	XC6127C52EMR	Vdet-IC	5.2V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5YU	-	XC6127C52FMR	Vdet-IC	5.2V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5YV	-	XC6127C52GMR	Vdet-IC	5.2V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5YX	-	XC6127C52HMR	Vdet-IC	5.2V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5YY	-	XC6127C52JMR	Vdet-IC	5.2V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5YZ	-	XC6127C52KMR	Vdet-IC	5.2V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5Z	-	R1210N251D	DC-DC-IC	PWM step-up, 2.5V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
5Z0	-	XC9236E40DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
5Z8	-	XC6205D092MR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5Z9	-	XC6205D102MR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5ZA	-	XC6127C53AMR	Vdet-IC	5.3V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5ZA	-	XC6205D112MR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5ZB	-	XC6127C53BMR	Vdet-IC	5.3V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5ZB	-	XC6205D122MR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5ZC	-	XC6127C53CMR	Vdet-IC	5.3V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5ZC	-	XC6205D132MR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5ZD	-	XC6127C53DMR	Vdet-IC	5.3V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5ZD	-	XC6205D142MR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5ZE	-	XC6127C53EMR	Vdet-IC	5.3V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5ZE	-	XC6205D152MR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5ZF	-	XC6127C53FMR	Vdet-IC	5.3V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5ZF	-	XC6205D162MR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5ZH	-	XC6127C53GMR	Vdet-IC	5.3V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5ZH	-	XC6205D172MR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
5ZK	-	XC6127C53HMR	Vdet-IC	5.3V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5ZL	-	XC6127C53JMR	Vdet-IC	5.3V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5ZM	-	XC6127C53KMR	Vdet-IC	5.3V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5ZN	-	XC6127C54AMR	Vdet-IC	5.4V±0.8%, -Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5ZP	-	XC6127C54BMR	Vdet-IC	5.4V±0.8%, -Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5ZR	-	XC6127C54CMR	Vdet-IC	5.4V±0.8%, -Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5ZS	-	XC6127C54DMR	Vdet-IC	5.4V±0.8%, -Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5ZT	-	XC6127C54EMR	Vdet-IC	5.4V±0.8%, -Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
5ZU	-	XC6127C54FMR	Vdet-IC	5.4V±0.8%, +Reset PPO, -MR, Rt=50ms	SOT-25	28yx	VD5	6g	Tor
5ZV	-	XC6127C54GMR	Vdet-IC	5.4V±0.8%, +Reset PPO, -MR, Rt=100ms	SOT-25	28yx	VD5	6g	Tor
5ZX	-	XC6127C54HMR	Vdet-IC	5.4V±0.8%, +Reset PPO, -MR, Rt=200ms	SOT-25	28yx	VD5	6g	Tor
5ZY	-	XC6127C54JMR	Vdet-IC	5.4V±0.8%, +Reset PPO, -MR, Rt=400ms	SOT-25	28yx	VD5	6g	Tor
5ZZ	-	XC6127C54KMR	Vdet-IC	5.4V±0.8%, +Reset PPO, -MR, Rt=800ms	SOT-25	28yx	VD5	6g	Tor
6.2D	-	MAZL062D	SA-Z-diode	Quad, 6.2V±5%, Zzt=30Ω(5mA), 100mA, 200mW	SOT-23-5	28	D16	6a	Pan
6.2Z	-	MAZL062H	SA-Z-diode	Quad, 6.2V±5%, Zzt=30Ω(5mA), 200mW	SC-74A	28	D16	6a	Pan
6.2Z	-	MAZM062H	SA-Z-diode	Quad, 6.2V, 5mA, 150mW	SSMini5	30	D16	6a	Pan
6.2Z	-	MAZZ062H	SA-Z-diode	Quad, 6.2V, 5mA, 200mW	SMini5	30	D16	6a	Pan
6.8A	-	MAZK068D	SA-Z-diode	Quad, 6.8V±5%, Zzt=6Ω(5mA), 100mA, 200mW	SOT-23-5	28	D16	6a	Pan
6.8D	-	MAZL068D	SA-Z-diode	Quad, 6.8V±5%, Zzt=20Ω(5mA), 100mA, 200mW	SOT-23-5	28	D16	6a	Pan
6.8Z	-	MAZL068H	SA-Z-diode	Quad, 6.8V, 5mA, 200mW	SC-74A	28	D16	6a	Pan
6.8Z	-	MAZM068H	SA-Z-diode	Quad, 6.8V, 5mA, 150mW	SSMini5	30	D16	6a	Pan
6.8Z	-	MAZZ068H	SA-Z-diode	Quad, 6.8V, 5mA, 200mW	SMini5	30	D16	6a	Pan
60	-	RN5RF60AA	LVR-IC	LRip, -CE, 6V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
60	-	RN5RZ60AA	LVR-IC	LDO, LN, 6V±2%, 100mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
60	-	XC62EP6002MR-G	LVR-IC	LDO, boosted, 6.0V±2%, 1A, -CE	SOT-25	28vw	VR6	6g	Tor
60	ea	XC62ER6002MR-G	LVR-IC	LDO, boosted, 6.0V±2%, 1A, +CE	SOT-25	28vw	VR6	6g	Tor
60-	-	XC62HR6002MR-G	LVR-IC	LDO, 6.0V±2%, 165mA, +CE	SOT-25	28ex	VR4	6g	Tor
600AC	-	BL8509-600ACRN	Vdet-IC	6.0V±2%, -Reset PPO, Td=50ms	SOT-23-5	28vdm	VD7	6a	Shb
600AC	-	LC9009CB5TR600AC	Vdet-IC	6.0V±2%, -Reset PPO, Rtd=50ms	SOT-23-5	28vda	VD7	6a	Lch
600AN	-	BL8509-600ANRN	Vdet-IC	6.0V±2%, -Reset ODO, Td=50ms	SOT-23-5	28vdm	VD6	6a	Shb
600AN	-	LC9009CB5TR600AN	Vdet-IC	6.0V±2%, -Reset ODO, Rtd=50ms	SOT-23-5	28vda	VD6	6a	Lch
600BC	-	BL8509-600BCRN	Vdet-IC	6.0V±2%, -Reset PPO, Td=100ms	SOT-23-5	28vdm	VD7	6a	Shb
600BC	-	LC9009CB5TR600BC	Vdet-IC	6.0V±2%, -Reset PPO, Rtd=100ms	SOT-23-5	28vda	VD7	6a	Lch
600BN	-	BL8509-600BNRN	Vdet-IC	6.0V±2%, -Reset ODO, Td=100ms	SOT-23-5	28vdm	VD6	6a	Shb
600BN	-	LC9009CB5TR600BN	Vdet-IC	6.0V±2%, -Reset ODO, Rtd=100ms	SOT-23-5	28vda	VD6	6a	Lch
600CC	-	BL8509-600CCRN	Vdet-IC	6.0V±2%, -Reset PPO, Td=150ms	SOT-23-5	28vdm	VD7	6a	Shb
600CC	-	LC9009CB5TR600CC	Vdet-IC	6.0V±2%, -Reset PPO, Rtd=150ms	SOT-23-5	28vda	VD7	6a	Lch
600CN	-	BL8509-600CNRN	Vdet-IC	6.0V±2%, -Reset ODO, Td=150ms	SOT-23-5	28vdm	VD6	6a	Shb
600CN	-	LC9009CB5TR600CN	Vdet-IC	6.0V±2%, -Reset ODO, Rtd=150ms	SOT-23-5	28vda	VD6	6a	Lch
600DC	-	BL8509-600DCRN	Vdet-IC	6.0V±2%, -Reset PPO, Td=200ms	SOT-23-5	28vdm	VD7	6a	Shb
600DC	-	LC9009CB5TR600DC	Vdet-IC	6.0V±2%, -Reset PPO, Rtd=200ms	SOT-23-5	28vda	VD7	6a	Lch
600DN	-	BL8509-600DNRN	Vdet-IC	6.0V±2%, -Reset ODO, Td=200ms	SOT-23-5	28vdm	VD6	6a	Shb
600DN	-	LC9009CB5TR600DN	Vdet-IC	6.0V±2%, -Reset ODO, Rtd=200ms	SOT-23-5	28vda	VD6	6a	Lch
600EC	-	BL8509-600ECRN	Vdet-IC	6.0V±2%, -Reset PPO, Td=250ms	SOT-23-5	28vdm	VD7	6a	Shb
600EC	-	LC9009CB5TR600EC	Vdet-IC	6.0V±2%, -Reset PPO, Rtd=250ms	SOT-23-5	28vda	VD7	6a	Lch
600EN	-	BL8509-600ENRN	Vdet-IC	6.0V±2%, -Reset ODO, Td=250ms	SOT-23-5	28vdm	VD6	6a	Shb
600EN	-	LC9009CB5TR600EN	Vdet-IC	6.0V±2%, -Reset ODO, Rtd=250ms	SOT-23-5	28vda	VD6	6a	Lch
600FC	-	BL8509-600FCRN	Vdet-IC	6.0V±2%, -Reset PPO, Td=300ms	SOT-23-5	28vdm	VD7	6a	Shb
600FC	-	LC9009CB5TR600FC	Vdet-IC	6.0V±2%, -Reset PPO, Rtd=300ms	SOT-23-5	28vda	VD7	6a	Lch
600FN	-	BL8509-600FNRN	Vdet-IC	6.0V±2%, -Reset ODO, Td=300ms	SOT-23-5	28vdm	VD6	6a	Shb
600FN	-	LC9009CB5TR600FN	Vdet-IC	6.0V±2%, -Reset ODO, Rtd=300ms	SOT-23-5	28vda	VD6	6a	Lch
600GC	-	BL8509-600GCRN	Vdet-IC	6.0V±2%, -Reset PPO, Td=400ms	SOT-23-5	28vdm	VD7	6a	Shb
600GC	-	LC9009CB5TR600GC	Vdet-IC	6.0V±2%, -Reset PPO, Rtd=400ms	SOT-23-5	28vda	VD7	6a	Lch
600GN	-	BL8509-600GNRN	Vdet-IC	6.0V±2%, -Reset ODO, Td=400ms	SOT-23-5	28vdm	VD6	6a	Shb
600GN	-	LC9009CB5TR600GN	Vdet-IC	6.0V±2%, -Reset ODO, Rtd=400ms	SOT-23-5	28vda	VD6	6a	Lch
609	ed	XC9206A093M	DC-DC-IC	PWM step-down, 300kHz, 0.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
60A	-	RP102N121B	LVR-IC	LDO, LN, 1.2V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60A	-	XC6127N55AMR	Vdet-IC	5.5V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
60B	-	RP102N131B	LVR-IC	LDO, LN, 1.3V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60B	-	XC6127N55BMR	Vdet-IC	5.5V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
60C	-	RP102N151B	LVR-IC	LDO, LN, 1.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60C	-	XC6127N55CMR	Vdet-IC	5.5V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
60D	-	RP102N181B	LVR-IC	LDO, LN, 1.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60D	-	XC6127N55DMR	Vdet-IC	5.5V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
60E	-	RP102N251B	LVR-IC	LDO, LN, 2.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60E	-	XC6127N55EMR	Vdet-IC	5.5V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
60F	-	RP102N261B	LVR-IC	LDO, LN, 2.6V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60F	-	XC6127N55FMR	Vdet-IC	5.5V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
60G	-	RP102N281B	LVR-IC	LDO, LN, 2.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60H	-	RP102N281B5	LVR-IC	LDO, LN, 2.85V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60H	-	XC6127N55GMR	Vdet-IC	5.5V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
60J	-	RP102N291B	LVR-IC	LDO, LN, 2.9V±1%, 300mA	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
60K	-	RP102N301B	LVR-IC	LDO, LN, 3.0V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60K	-	XC6127N55HMR	Vdet-IC	5.5V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
60L	-	RP102N331B	LVR-IC	LDO, LN, 3.3V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60L	-	XC6127N55JMR	Vdet-IC	5.5V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
60M	-	RP102N181B5	LVR-IC	LDO, LN, 1.85V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60M	-	XC6127N55KMR	Vdet-IC	5.5V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
60M	ed	XC9206A096M	DC-DC-IC	PWM step-down, 600kHz, 0.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
60N	-	RP102N271B	LVR-IC	LDO, LN, 2.7V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60P	-	RP102N121B5	LVR-IC	LDO, LN, 1.25V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60Q	-	RP102N311B	LVR-IC	LDO, LN, 3.1V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60R	-	RP102N171B5	LVR-IC	LDO, LN, 1.75V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60S	-	RP102N211B	LVR-IC	LDO, LN, 2.1V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60T	-	RP102N141B	LVR-IC	LDO, LN, 1.4V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60U	-	RP102N321B	LVR-IC	LDO, LN, 3.2V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60V	-	RP102N171B	LVR-IC	LDO, LN, 1.7V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60W	-	RP102N201B	LVR-IC	LDO, LN, 2.0V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60X	-	RP102N291B5	LVR-IC	LDO, LN, 2.95V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60Y	-	RP102N321B5	LVR-IC	LDO, LN, 3.25V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
60Z	-	RP102N161B	LVR-IC	LDO, LN, 1.6V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
610	ed	XC9206A103M	DC-DC-IC	PWM step-down, 300kHz, 1.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
611	ed	XC9206A113M	DC-DC-IC	PWM step-down, 300kHz, 1.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
612	ed	XC9206A123M	DC-DC-IC	PWM step-down, 300kHz, 1.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
613	ed	XC9206A133M	DC-DC-IC	PWM step-down, 300kHz, 1.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
614	ed	XC9206A143M	DC-DC-IC	PWM step-down, 300kHz, 1.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
615	-	R1114N151D	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
615	ed	XC9206A153M	DC-DC-IC	PWM step-down, 300kHz, 1.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
615	eh	XC9111D151MR	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
616	-	R1114N161D	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
616	ed	XC9206A163M	DC-DC-IC	PWM step-down, 300kHz, 1.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
616	eh	XC9111D161MR	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
617	-	R1114N171D	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
617	ed	XC9206A173M	DC-DC-IC	PWM step-down, 300kHz, 1.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
617	eh	XC9111D171MR	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
618	-	R1114N181D	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
618	ed	XC9206A183M	DC-DC-IC	PWM step-down, 300kHz, 1.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
618	eh	XC9111D181MR	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
619	-	R1114N191D	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
619	ed	XC9206A193M	DC-DC-IC	PWM step-down, 300kHz, 1.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
619	eh	XC9111D191MR	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
61A	-	RP102N121D	LVR-IC	LDO, LN, 1.2V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61A	ed	XC9206A106M	DC-DC-IC	PWM step-down, 600kHz, 1.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
61B	-	RP102N131D	LVR-IC	LDO, LN, 1.3V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61B	ed	XC9206A116M	DC-DC-IC	PWM step-down, 600kHz, 1.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
61C	-	RP102N151D	LVR-IC	LDO, LN, 1.5V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61C	ed	XC9206A126M	DC-DC-IC	PWM step-down, 600kHz, 1.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
61D	-	RP102N181D	LVR-IC	LDO, LN, 1.8V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61D	ed	XC9206A136M	DC-DC-IC	PWM step-down, 600kHz, 1.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
61E	-	RP102N251D	LVR-IC	LDO, LN, 2.5V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61E	ed	XC9206A146M	DC-DC-IC	PWM step-down, 600kHz, 1.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
61F	-	RP102N261D	LVR-IC	LDO, LN, 2.6V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61F	ed	XC9206A156M	DC-DC-IC	PWM step-down, 600kHz, 1.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
61G	-	RP102N281D	LVR-IC	LDO, LN, 2.8V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61H	-	RP102N281D5	LVR-IC	LDO, LN, 2.85V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61H	ed	XC9206A166M	DC-DC-IC	PWM step-down, 600kHz, 1.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
61J	-	RP102N291D	LVR-IC	LDO, LN, 2.9V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61K	-	RP102N301D	LVR-IC	LDO, LN, 3.0V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61K	ed	XC9206A176M	DC-DC-IC	PWM step-down, 600kHz, 1.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
61L	-	RP102N331D	LVR-IC	LDO, LN, 3.3V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61L	ed	XC9206A186M	DC-DC-IC	PWM step-down, 600kHz, 1.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
61M	-	RP102N181D5	LVR-IC	LDO, LN, 1.85V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61M	ed	XC9206A196M	DC-DC-IC	PWM step-down, 600kHz, 1.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
61N	-	RP102N271D	LVR-IC	LDO, LN, 2.7V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61P	-	RP102N121D5	LVR-IC	LDO, LN, 1.25V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61Q	-	RP102N311D	LVR-IC	LDO, LN, 3.1V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61R	-	RP102N171D5	LVR-IC	LDO, LN, 1.75V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61S	-	RP102N211D	LVR-IC	LDO, LN, 2.1V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61T	-	RP102N141D	LVR-IC	LDO, LN, 1.4V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61U	-	RP102N321D	LVR-IC	LDO, LN, 3.2V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61V	-	RP102N171D	LVR-IC	LDO, LN, 1.7V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61W	-	RP102N201D	LVR-IC	LDO, LN, 2.0V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
61X	-	RP102N291D5	LVR-IC	LDO, LN, 2.95V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61Y	-	RP102N321D5	LVR-IC	LDO, LN, 3.25V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61Y	ed	XC9206A1L6M	DC-DC-IC	PWM step-down, 600kHz, 1.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
61Z	-	RP102N161D	LVR-IC	LDO, LN, 1.6V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
61Z	ed	XC9206A1L3M	DC-DC-IC	PWM step-down, 300kHz, 1.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
620	-	R1114N201D	LVR-IC	LDO, Low noise, 2.0V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
620	-	R1191N020D	LVR-IC	LDO, 2.0V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
620	ed	XC9206A203M	DC-DC-IC	PWM step-down, 300kHz, 2.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
620	eh	XC9111D201MR	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
621	-	R1114N211D	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
621	-	R1191N021D	LVR-IC	LDO, 2.1V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
621	ed	XC9206A213M	DC-DC-IC	PWM step-down, 300kHz, 2.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
621	eh	XC9111D211MR	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
622	-	R1114N221D	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
622	-	R1191N022D	LVR-IC	LDO, 2.2V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
622	ed	XC9206A223M	DC-DC-IC	PWM step-down, 300kHz, 2.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
622	eh	XC9111D221MR	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
6220	-	UC62120-AF5-R	LVR-IC	LDO, 2.0V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6221	-	UC62121-AF5-R	LVR-IC	LDO, 2.1V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6222	-	UC62122-AF5-R	LVR-IC	LDO, 2.2V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6223	-	UC62123-AF5-R	LVR-IC	LDO, 2.3V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6224	-	UC62124-AF5-R	LVR-IC	LDO, 2.4V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6225	-	UC62125-AF5-R	LVR-IC	LDO, 2.5V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6226	-	UC62126-AF5-R	LVR-IC	LDO, 2.6V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6227	-	UC62127-AF5-R	LVR-IC	LDO, 2.7V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6228	-	UC62128-AF5-R	LVR-IC	LDO, 2.8V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6229	-	UC62129-AF5-R	LVR-IC	LDO, 2.9V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
623	-	R1114N231D	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
623	-	R1191N023D	LVR-IC	LDO, 2.3V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
623	ed	XC9206A233M	DC-DC-IC	PWM step-down, 300kHz, 2.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
623	eh	XC9111D231MR	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
6230	-	UC62130-AF5-R	LVR-IC	LDO, 3.0V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6231	-	UC62131-AF5-R	LVR-IC	LDO, 3.1V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6232	-	UC62132-AF5-R	LVR-IC	LDO, 3.2V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6233	-	UC62133-AF5-R	LVR-IC	LDO, 3.3V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6234	-	UC62134-AF5-R	LVR-IC	LDO, 3.4V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6235	-	UC62135-AF5-R	LVR-IC	LDO, 3.5V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6236	-	UC62136-AF5-R	LVR-IC	LDO, 3.6V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6237	-	UC62137-AF5-R	LVR-IC	LDO, 3.7V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6238	-	UC62138-AF5-R	LVR-IC	LDO, 3.8V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6239	-	UC62139-AF5-R	LVR-IC	LDO, 3.9V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
624	-	R1114N241D	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
624	-	R1191N024D	LVR-IC	LDO, 2.4V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
624	ed	XC9206A243M	DC-DC-IC	PWM step-down, 300kHz, 2.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
624	eh	XC9111D241MR	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
6240	-	UC62140-AF5-R	LVR-IC	LDO, 4.0V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6241	-	UC62141-AF5-R	LVR-IC	LDO, 4.1V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6242	-	UC62142-AF5-R	LVR-IC	LDO, 4.2V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6243	-	UC62143-AF5-R	LVR-IC	LDO, 4.3V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6244	-	UC62144-AF5-R	LVR-IC	LDO, 4.4V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6245	-	UC62145-AF5-R	LVR-IC	LDO, 4.5V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6246	-	UC62146-AF5-R	LVR-IC	LDO, 4.6V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6247	-	UC62147-AF5-R	LVR-IC	LDO, 4.7V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6248	-	UC62148-AF5-R	LVR-IC	LDO, 4.8V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6249	-	UC62149-AF5-R	LVR-IC	LDO, 4.9V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
625	-	R1114N251D	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
625	-	R1191N025D	LVR-IC	LDO, 2.5V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
625	ed	XC9206A253M	DC-DC-IC	PWM step-down, 300kHz, 2.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
625	eh	XC9111D251MR	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
6250	-	UC62150-AF5-R	LVR-IC	LDO, 5.0V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6251	-	UC62151-AF5-R	LVR-IC	LDO, 5.1V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6252	-	UC62152-AF5-R	LVR-IC	LDO, 5.2V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6253	-	UC62153-AF5-R	LVR-IC	LDO, 5.3V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6254	-	UC62154-AF5-R	LVR-IC	LDO, 5.4V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6255	-	UC62155-AF5-R	LVR-IC	LDO, 5.5V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6256	-	UC62156-AF5-R	LVR-IC	LDO, 5.6V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6257	-	UC62157-AF5-R	LVR-IC	LDO, 5.7V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6258	-	UC62158-AF5-R	LVR-IC	LDO, 5.8V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
6259	-	UC62159-AF5-R	LVR-IC	LDO, 5.9V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
626	-	R1114N261D	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
626	-	R1191N026D	LVR-IC	LDO, 2.6V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
626	ed	XC9206A263M	DC-DC-IC	PWM step-down, 300kHz, 2.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
626	eh	XC9111D261MR	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
6260	-	UC62160-AF5-R	LVR-IC	LDO, 6.0V±2%, 100mA, +CE, external transistor	SOT-25	28vw	VR6	6a	Utc
627	-	R1114N271D	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
627	-	R1191N027D	LVR-IC	LDO, 2.7V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
627	ed	XC9206A273M	DC-DC-IC	PWM step-down, 300kHz, 2.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
627	eh	XC9111D271MR	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
628	-	R1114N281D	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
628	-	R1191N028D	LVR-IC	LDO, 2.8V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
628	ed	XC9206A283M	DC-DC-IC	PWM step-down, 300kHz, 2.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
628	eh	XC9111D281MR	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
629	-	R1114N291D	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
629	-	R1191N029D	LVR-IC	LDO, 2.9V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
629	ed	XC9206A293M	DC-DC-IC	PWM step-down, 300kHz, 2.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
629	eh	XC9111D291MR	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
62A	-	RP102N191B	LVR-IC	LDO, LN, 1.9V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
62A	ed	XC9206A206M	DC-DC-IC	PWM step-down, 600kHz, 2.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
62B	-	RP102N221B	LVR-IC	LDO, LN, 2.2V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
62B	ed	XC9206A216M	DC-DC-IC	PWM step-down, 600kHz, 2.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
62C	-	RP102N231B	LVR-IC	LDO, LN, 2.3V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
62C	ed	XC9206A226M	DC-DC-IC	PWM step-down, 600kHz, 2.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
62D	-	RP102N241B	LVR-IC	LDO, LN, 2.4V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
62D	ed	XC9206A236M	DC-DC-IC	PWM step-down, 600kHz, 2.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
62E	ed	XC9206A246M	DC-DC-IC	PWM step-down, 600kHz, 2.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
62F	ed	XC9206A256M	DC-DC-IC	PWM step-down, 600kHz, 2.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
62H	ed	XC9206A266M	DC-DC-IC	PWM step-down, 600kHz, 2.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
62K	ed	XC9206A276M	DC-DC-IC	PWM step-down, 600kHz, 2.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
62L	ed	XC9206A286M	DC-DC-IC	PWM step-down, 600kHz, 2.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
62M	ed	XC9206A296M	DC-DC-IC	PWM step-down, 600kHz, 2.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
62N	-	HZM6.2ZMFA	TVS	Quad, Vrwm=6.2V, 200mW	SOT-23-5	28	D16	6a	Ren
62Y	ed	XC9206A2L6M	DC-DC-IC	PWM step-down, 600kHz, 2.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
62Z	ed	XC9206A2L3M	DC-DC-IC	PWM step-down, 300kHz, 2.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
630	-	R1114N301D	LVR-IC	LDO, Low noise, 3.0V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
630	-	R1191N030D	LVR-IC	LDO, 3.0V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
630	ed	XC9206A303M	DC-DC-IC	PWM step-down, 300kHz, 3.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
630	eh	XC9111D301MR	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
631	-	R1114N311D	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
631	-	R1191N031D	LVR-IC	LDO, 3.1V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
631	ed	XC9206A313M	DC-DC-IC	PWM step-down, 300kHz, 3.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
631	eh	XC9111D311MR	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
632	-	R1114N321D	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
632	-	R1191N032D	LVR-IC	LDO, 3.2V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
632	ed	XC9206A323M	DC-DC-IC	PWM step-down, 300kHz, 3.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
632	eh	XC9111D321MR	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
633	-	R1114N331D	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
633	-	R1191N033D	LVR-IC	LDO, 3.3V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
633	ed	XC9206A333M	DC-DC-IC	PWM step-down, 300kHz, 3.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
633	eh	XC9111D331MR	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
634	-	R1114N341D	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
634	-	R1191N034D	LVR-IC	LDO, 3.4V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
634	ed	XC9206A343M	DC-DC-IC	PWM step-down, 300kHz, 3.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
634	eh	XC9111D341MR	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
635	-	R1114N351D	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
635	-	R1191N035D	LVR-IC	LDO, 3.5V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
635	ed	XC9206A353M	DC-DC-IC	PWM step-down, 300kHz, 3.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
635	eh	XC9111D351MR	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
636	-	R1114N361D	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
636	-	R1191N036D	LVR-IC	LDO, 3.6V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
636	ed	XC9206A363M	DC-DC-IC	PWM step-down, 300kHz, 3.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
636	eh	XC9111D361MR	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
637	-	R1114N371D	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
637	-	R1191N037D	LVR-IC	LDO, 3.7V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
637	ed	XC9206A373M	DC-DC-IC	PWM step-down, 300kHz, 3.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
637	eh	XC9111D371MR	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
638	-	R1114N381D	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
638	-	R1191N038D	LVR-IC	LDO, 3.8V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
638	ed	XC9206A383M	DC-DC-IC	PWM step-down, 300kHz, 3.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
638	eh	XC9111D381MR	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
639	-	R1114N391D	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
639	-	R1191N039D	LVR-IC	LDO, 3.9V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
639	ed	XC9206A393M	DC-DC-IC	PWM step-down, 300kHz, 3.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
639	eh	XC9111D391MR	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
63A	-	RP102N191D	LVR-IC	LDO, LN, 1.9V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
63A	ed	XC9206A306M	DC-DC-IC	PWM step-down, 600kHz, 3.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
63B	-	RP102N221D	LVR-IC	LDO, LN, 2.2V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
63B	ed	XC9206A316M	DC-DC-IC	PWM step-down, 600kHz, 3.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
63C	-	RP102N231D	LVR-IC	LDO, LN, 2.3V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
63C	ed	XC9206A326M	DC-DC-IC	PWM step-down, 600kHz, 3.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
63D	-	RP102N241D	LVR-IC	LDO, LN, 2.4V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
63D	ed	XC9206A336M	DC-DC-IC	PWM step-down, 600kHz, 3.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
63E	ed	XC9206A346M	DC-DC-IC	PWM step-down, 600kHz, 3.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
63F	ed	XC9206A356M	DC-DC-IC	PWM step-down, 600kHz, 3.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
63H	ed	XC9206A366M	DC-DC-IC	PWM step-down, 600kHz, 3.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
63K	ed	XC9206A376M	DC-DC-IC	PWM step-down, 600kHz, 3.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
63L	ed	XC9206A386M	DC-DC-IC	PWM step-down, 600kHz, 3.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
63M	ed	XC9206A396M	DC-DC-IC	PWM step-down, 600kHz, 3.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
640	-	R1114N401D	LVR-IC	LDO, Low noise, 4.0V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
640	-	R1191N040D	LVR-IC	LDO, 4.0V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
640	ed	XC9206A403M	DC-DC-IC	PWM step-down, 300kHz, 4.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
640	eh	XC9111D401MR	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
641	-	R1114N281D5	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
641	-	R1191N041D	LVR-IC	LDO, 4.1V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
641	eh	XC9111D411MR	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
642	-	R1191N042D	LVR-IC	LDO, 4.2V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
642	eh	XC9111D421MR	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
643	-	R1191N043D	LVR-IC	LDO, 4.3V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
643	eh	XC9111D431MR	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
644	-	R1191N044D	LVR-IC	LDO, 4.4V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
644	eh	XC9111D441MR	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
645	-	R1191N045D	LVR-IC	LDO, 4.5V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
645	eh	XC9111D451MR	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
645	fc	MIC5365-1.2YD5	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	TSOT-23-5	28gf	VR4	6g	Mcr
646	-	R1191N046D	LVR-IC	LDO, 4.6V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
646	eh	XC9111D461MR	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
647	-	R1191N047D	LVR-IC	LDO, 4.7V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
647	eh	XC9111D471MR	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
648	-	R1191N048D	LVR-IC	LDO, 4.8V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
648	eh	XC9111D481MR	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
649	-	R1191N049D	LVR-IC	LDO, 4.9V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
649	eh	XC9111D491MR	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
64A	ed	XC9206A406M	DC-DC-IC	PWM step-down, 600kHz, 4.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
650	-	R1191N050D	LVR-IC	LDO, 5.0V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
650	eh	XC9111D501MR	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
651	-	R1191N051D	LVR-IC	LDO, 5.1V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
651	eh	XC9111D511MR	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
652	-	R1191N052D	LVR-IC	LDO, 5.2V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
652	eh	XC9111D521MR	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
653	-	R1191N053D	LVR-IC	LDO, 5.3V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
653	eh	XC9111D531MR	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
654	-	R1191N054D	LVR-IC	LDO, 5.4V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
654	eh	XC9111D541MR	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
654	fc	MIC5365-1.2YC5	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SC-70-5	28gf	VR4	6g	Mcr
655	-	R1191N055D	LVR-IC	LDO, 5.5V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
655	eh	XC9111D551MR	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
655	fc	MIC5365-1.3YC5	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SC-70-5	28gf	VR4	6g	Mcr
656	-	R1191N056D	LVR-IC	LDO, 5.6V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
656	eh	XC9111D561MR	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
657	-	R1191N057D	LVR-IC	LDO, 5.7V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
657	eh	XC9111D571MR	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
658	-	R1191N058D	LVR-IC	LDO, 5.8V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
658	eh	XC9111D581MR	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
659	-	R1191N059D	LVR-IC	LDO, 5.9V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
659	eh	XC9111D591MR	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
65C	fc	MIC5365-1.0YC5	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	SC-70-5	28gf	VR4	6g	Mcr
65F	-	LN1121P162KR	LVR-IC	LDO, 1.6V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
65F	fc	MIC5365-1.5YC5	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SC-70-5	28gf	VR4	6g	Mcr
65G	fc	MIC5365-1.8YC5	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SC-70-5	28gf	VR4	6g	Mcr
65H	fc	MIC5365-2.0YC5	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SC-70-5	28gf	VR4	6g	Mcr
65J	fc	MIC5365-2.5YC5	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SC-70-5	28gf	VR4	6g	Mcr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
65K	fc	MIC5365-2.6YC5	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SC-70-5	28gf	VR4	6g	Mcr
65L	fc	MIC5365-2.7YC5	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SC-70-5	28gf	VR4	6g	Mcr
65M	fc	MIC5365-2.8YC5	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SC-70-5	28gf	VR4	6g	Mcr
65N	fc	MIC5365-2.85YC5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SC-70-5	28gf	VR4	6g	Mcr
65O	fc	MIC5365-2.9YC5	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SC-70-5	28gf	VR4	6g	Mcr
65P	fc	MIC5365-3.0YC5	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SC-70-5	28gf	VR4	6g	Mcr
65S	fc	MIC5365-3.3YC5	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SC-70-5	28gf	VR4	6g	Mcr
660	-	R1191N060D	LVR-IC	LDO, 6.0V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
660	eh	XC9111D601MR	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
661	-	R1191N061D	LVR-IC	LDO, 6.1V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
661	eh	XC9111D611MR	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
662	-	R1191N062D	LVR-IC	LDO, 6.2V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
662	eh	XC9111D621MR	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
663	-	R1191N063D	LVR-IC	LDO, 6.3V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
663	eh	XC9111D631MR	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
664	-	R1191N064D	LVR-IC	LDO, 6.4V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
664	eh	XC9111D641MR	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
664	fc	MIC5366-1.2YC5	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, CL autodischarge	SC-70-5	28gf	VR4	6g	Mcr
665	-	R1191N065D	LVR-IC	LDO, 6.5V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
665	eh	XC9111D651MR	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
665	fc	MIC5366-1.3YC5	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, CL autodischarge	SC-70-5	28gf	VR4	6g	Mcr
666	-	R1191N066D	LVR-IC	LDO, 6.6V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
666	eh	XC9111D661MR	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
667	-	R1191N067D	LVR-IC	LDO, 6.7V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
667	eh	XC9111D671MR	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
668	-	R1191N068D	LVR-IC	LDO, 6.8V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
668	eh	XC9111D681MR	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
669	-	R1191N069D	LVR-IC	LDO, 6.9V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
669	eh	XC9111D691MR	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
66C	fc	MIC5366-1.0YC5	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, CL autodischarge	SC-70-5	28gf	VR4	6g	Mcr
66F	fc	MIC5366-1.5YC5	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, CL autodischarge	SC-70-5	28gf	VR4	6g	Mcr
66G	fc	MIC5366-1.8YC5	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, CL autodischarge	SC-70-5	28gf	VR4	6g	Mcr
66H	fc	MIC5366-2.0YC5	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, CL autodischarge	SC-70-5	28gf	VR4	6g	Mcr
66J	fc	MIC5366-2.5YC5	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, CL autodischarge	SC-70-5	28gf	VR4	6g	Mcr
66K	fc	MIC5366-2.6YC5	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, CL autodischarge	SC-70-5	28gf	VR4	6g	Mcr
66L	fc	MIC5366-2.7YC5	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, CL autodischarge	SC-70-5	28gf	VR4	6g	Mcr
66M	fc	MIC5366-2.8YC5	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, CL autodischarge	SC-70-5	28gf	VR4	6g	Mcr
66N	fc	MIC5366-2.85YC5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, CL autodischarge	SC-70-5	28gf	VR4	6g	Mcr
66O	fc	MIC5366-2.9YC5	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, CL autodischarge	SC-70-5	28gf	VR4	6g	Mcr
66P	fc	MIC5366-3.0YC5	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, CL autodischarge	SC-70-5	28gf	VR4	6g	Mcr
66S	fc	MIC5366-3.3YC5	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, CL autodischarge	SC-70-5	28gf	VR4	6g	Mcr
670	-	R1191N070D	LVR-IC	LDO, 7.0V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
670	eh	XC9111D701MR	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
671	-	R1191N071D	LVR-IC	LDO, 7.1V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
672	-	R1191N072D	LVR-IC	LDO, 7.2V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
673	-	R1191N073D	LVR-IC	LDO, 7.3V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
674	-	R1191N074D	LVR-IC	LDO, 7.4V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
675	-	R1191N075D	LVR-IC	LDO, 7.5V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
676	-	R1191N076D	LVR-IC	LDO, 7.6V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
677	-	R1191N077D	LVR-IC	LDO, 7.7V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
678	-	R1191N078D	LVR-IC	LDO, 7.8V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
679	-	R1191N079D	LVR-IC	LDO, 7.9V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
680	-	R1191N080D	LVR-IC	LDO, 8.0V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
681	-	R1191N081D	LVR-IC	LDO, 8.1V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
682	-	R1191N082D	LVR-IC	LDO, 8.2V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
683	-	R1191N083D	LVR-IC	LDO, 8.3V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
684	-	R1191N084D	LVR-IC	LDO, 8.4V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
685	-	R1191N085D	LVR-IC	LDO, 8.5V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
686	-	R1191N086D	LVR-IC	LDO, 8.6V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
687	-	R1191N087D	LVR-IC	LDO, 8.7V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
688	-	R1191N088D	LVR-IC	LDO, 8.8V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
689	-	R1191N089D	LVR-IC	LDO, 8.9V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
690	-	R1191N090D	LVR-IC	LDO, 9.0V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
691	-	R1191N091D	LVR-IC	LDO, 9.1V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
692	-	R1191N092D	LVR-IC	LDO, 9.2V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
693	-	R1191N093D	LVR-IC	LDO, 9.3V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
694	-	R1191N094D	LVR-IC	LDO, 9.4V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
695	-	R1191N095D	LVR-IC	LDO, 9.5V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
696	-	R1191N096D	LVR-IC	LDO, 9.6V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
697	-	R1191N097D	LVR-IC	LDO, 9.7V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
698	-	R1191N098D	LVR-IC	LDO, 9.8V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
699	-	R1191N099D	LVR-IC	LDO, 9.9V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
6A	-	SN74AUP1T00DCK	CMOS-Log	2-input NAND gate	SC-70-5	28	Log1	6g	Ti
6A0	ej	XC6107A031MR	Vdet-IC	3.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6A1	ej	XC6107A032MR	Vdet-IC	3.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6A2	ej	XC6107A033MR	Vdet-IC	3.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6A3	ej	XC6107A034MR	Vdet-IC	3.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6A4	ej	XC6107A035MR	Vdet-IC	3.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6A5	ej	XC6107A036MR	Vdet-IC	3.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6A6	ej	XC6107A037MR	Vdet-IC	3.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6A7	ej	XC6107A038MR	Vdet-IC	3.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6A8	-	XC9237A08CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6A8	ej	XC6107A039MR	Vdet-IC	3.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6A9	-	XC9237A09CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6A9	ej	XC6107A040MR	Vdet-IC	4.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6Aa	-	FT531Aa	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
6AA	-	XC6127N15AMR	Vdet-IC	1.5V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6AA	ej	XC6107A041MR	Vdet-IC	4.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6Ab	-	FT531Ab	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
6AB	-	XC6127N15BMR	Vdet-IC	1.5V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6AB	ej	XC6107A042MR	Vdet-IC	4.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6Ac	-	FT531Ac	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
6AC	-	XC6127N15CMR	Vdet-IC	1.5V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6AC	ej	XC6107A043MR	Vdet-IC	4.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6Ad	-	FT531Ad	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
6AD	-	XC6127N15DMR	Vdet-IC	1.5V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6AD	ej	XC6107A044MR	Vdet-IC	4.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6Ae	-	FT531Ae	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
6AE	-	XC6127N15EMR	Vdet-IC	1.5V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6AE	ej	XC6107A045MR	Vdet-IC	4.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6Af	-	FT531Af	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
6AF	-	XC6127N15FMR	Vdet-IC	1.5V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6AF	ec	XC6107A016MR	Vdet-IC	1.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AF	ej	XC6107A046MR	Vdet-IC	4.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AH	-	XC6127N15GMR	Vdet-IC	1.5V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6AH	ec	XC6107A017MR	Vdet-IC	1.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AH	ej	XC6107A047MR	Vdet-IC	4.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AK	-	XC6127N15HMR	Vdet-IC	1.5V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6AK	ec	XC6107A018MR	Vdet-IC	1.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AK	ej	XC6107A048MR	Vdet-IC	4.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AL	-	XC6127N15JMR	Vdet-IC	1.5V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6AL	-	XC9237A0LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6AL	ec	XC6107A019MR	Vdet-IC	1.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AL	ej	XC6107A049MR	Vdet-IC	4.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AM	-	XC6127N15KMR	Vdet-IC	1.5V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6AM	-	XC9237A0MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6AM	ec	XC6107A020MR	Vdet-IC	2.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AM	ed	XC9206A09CM	DC-DC-IC	PWM step-down, 1.2MHz, 0.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6AM	ej	XC6107A050MR	Vdet-IC	5.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AN	-	XC6127N16AMR	Vdet-IC	1.6V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6AN	ec	XC6107A021MR	Vdet-IC	2.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AP	-	XC6127N16BMR	Vdet-IC	1.6V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6AP	ec	XC6107A022MR	Vdet-IC	2.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AR	-	XC6127N16CMR	Vdet-IC	1.6V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6AR	ec	XC6107A023MR	Vdet-IC	2.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AS	-	XC6127N16DMR	Vdet-IC	1.6V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6AS	ec	XC6107A024MR	Vdet-IC	2.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AT	-	XC6127N16EMR	Vdet-IC	1.6V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6AT	ec	XC6107A025MR	Vdet-IC	2.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AU	-	XC6127N16FMR	Vdet-IC	1.6V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6AU	ec	XC6107A026MR	Vdet-IC	2.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AV	-	XC6127N16GMR	Vdet-IC	1.6V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6AV	ec	XC6107A027MR	Vdet-IC	2.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AX	-	XC6127N16HMR	Vdet-IC	1.6V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6AX	ec	XC6107A028MR	Vdet-IC	2.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AY	-	XC6127N16JMR	Vdet-IC	1.6V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6AY	ec	XC6107A029MR	Vdet-IC	2.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6AZ	-	XC6127N16KMR	Vdet-IC	1.6V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6AZ	ec	XC6107A030MR	Vdet-IC	3.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
6B	-	R3111N161A	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6B	-	RN5RL26AA	LVR-IC	2.6V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
6B	-	SN74AUP1T02DCK	CMOS-Log	2-input NOR gate	SC-70-5	28	Log2	6g	Ti
6B	eu	RN5VD16CA	Vdet-IC	1.6V±2.5V, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
6B0	-	XC9237A10CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6B0	ej	XC6107B031MR	Vdet-IC	3.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6B1	-	XC9237A11CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6B1	ej	XC6107B032MR	Vdet-IC	3.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6B2	-	XC9237A12CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6B2	ej	XC6107B033MR	Vdet-IC	3.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6B3	-	XC9237A13CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6B3	ej	XC6107B034MR	Vdet-IC	3.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6B4	-	XC9237A14CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6B4	ej	XC6107B035MR	Vdet-IC	3.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6B5	-	XC9237A15CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6B5	ej	XC6107B036MR	Vdet-IC	3.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6B6	-	XC9237A16CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6B6	ej	XC6107B037MR	Vdet-IC	3.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6B7	-	XC9237A17CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6B7	ej	XC6107B038MR	Vdet-IC	3.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6B8	-	XC9237A18CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6B8	ej	XC6107B039MR	Vdet-IC	3.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6B9	-	XC9237A19CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6B9	ej	XC6107B040MR	Vdet-IC	4.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6Ba	-	FT531Ba	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
6BA	-	XC6127N17AMR	Vdet-IC	1.7V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6BA	-	XC9237A1ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6BA	ed	XC9206A10CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6BA	ej	XC6107B041MR	Vdet-IC	4.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6Bb	-	FT531Bb	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
6BB	-	XC6127N17BMR	Vdet-IC	1.7V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6BB	-	XC9237A1BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6BB	ed	XC9206A11CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6BB	ej	XC6107B042MR	Vdet-IC	4.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6Bc	-	FT531Bc	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
6BC	-	XC6127N17CMR	Vdet-IC	1.7V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6BC	-	XC9237A1CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6BC	ed	XC9206A12CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6BC	ej	XC6107B043MR	Vdet-IC	4.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6Bd	-	FT531Bd	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
6BD	-	XC6127N17DMR	Vdet-IC	1.7V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6BD	-	XC9237A1DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6BD	ed	XC9206A13CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6BD	ej	XC6107B044MR	Vdet-IC	4.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6Be	-	FT531Be	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
6BE	-	XC6127N17EMR	Vdet-IC	1.7V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6BE	-	XC9237A1ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6BE	ed	XC9206A14CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6BE	ej	XC6107B045MR	Vdet-IC	4.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6Bf	-	FT531Bf	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
6BF	-	XC6127N17FMR	Vdet-IC	1.7V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6BF	-	XC9237A1FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6BF	ec	XC6107B016MR	Vdet-IC	1.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BF	ed	XC9206A15CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6BF	ej	XC6107B046MR	Vdet-IC	4.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BH	-	XC6127N17GMR	Vdet-IC	1.7V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6BH	-	XC9237A1HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6BH	ec	XC6107B017MR	Vdet-IC	1.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BH	ed	XC9206A16CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6BH	ej	XC6107B047MR	Vdet-IC	4.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BK	-	XC6127N17HMR	Vdet-IC	1.7V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6BK	-	XC9237A1KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6BK	ec	XC6107B018MR	Vdet-IC	1.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BK	ed	XC9206A17CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6BK	ej	XC6107B048MR	Vdet-IC	4.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BL	-	XC6127N17JMR	Vdet-IC	1.7V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6BL	-	XC9237A1LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6BL	ec	XC6107B019MR	Vdet-IC	1.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BL	ed	XC9206A18CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6BL	ej	XC6107B049MR	Vdet-IC	4.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BM	-	XC6127N17KMR	Vdet-IC	1.7V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6BM	-	XC9237A1MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6BM	ec	XC6107B020MR	Vdet-IC	2.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BM	ed	XC9206A19CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6BM	ej	XC6107B050MR	Vdet-IC	5.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BN	-	XC6127N18AMR	Vdet-IC	1.8V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6BN	ec	XC6107B021MR	Vdet-IC	2.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BP	-	XC6127N18BMR	Vdet-IC	1.8V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6BP	ec	XC6107B022MR	Vdet-IC	2.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BR	-	XC6127N18CMR	Vdet-IC	1.8V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6BR	ec	XC6107B023MR	Vdet-IC	2.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BS	-	XC6127N18DMR	Vdet-IC	1.8V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6BS	ec	XC6107B024MR	Vdet-IC	2.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BT	-	XC6127N18EMR	Vdet-IC	1.8V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6BT	ec	XC6107B025MR	Vdet-IC	2.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BU	-	XC6127N18FMR	Vdet-IC	1.8V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6BU	ec	XC6107B026MR	Vdet-IC	2.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BV	-	XC6127N18GMR	Vdet-IC	1.8V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6BV	ec	XC6107B027MR	Vdet-IC	2.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BX	-	XC6127N18HMR	Vdet-IC	1.8V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6BX	ec	XC6107B028MR	Vdet-IC	2.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BY	-	XC6127N18JMR	Vdet-IC	1.8V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6BY	ec	XC6107B029MR	Vdet-IC	2.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6BY	ed	XC9206A1LCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6BZ	-	XC6127N18KMR	Vdet-IC	1.8V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6BZ	ec	XC6107B030MR	Vdet-IC	3.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
6C	-	R3111N261A	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
6C	-	RN5RL36AA	LVR-IC	3.6V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
6C	-	SN74AUP1T04DCK	CMOS-Log	Inverter	SC-70-5	28	Log6	6g	Ti
6C	eu	RN5VD26CA	Vdet-IC	2.6V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
6C0	-	XC9237A20CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6C0	ej	XC6107C031MR	Vdet-IC	3.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6C1	-	XC9237A21CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6C1	ej	XC6107C032MR	Vdet-IC	3.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6C2	-	XC9237A22CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6C2	ej	XC6107C033MR	Vdet-IC	3.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6C3	-	XC9237A23CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6C3	ej	XC6107C034MR	Vdet-IC	3.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6C4	-	XC9237A24CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6C4	ej	XC6107C035MR	Vdet-IC	3.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6C5	-	XC9237A25CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6C5	ej	XC6107C036MR	Vdet-IC	3.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6C6	-	XC9237A26CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6C6	ej	XC6107C037MR	Vdet-IC	3.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6C7	-	XC9237A27CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6C7	ej	XC6107C038MR	Vdet-IC	3.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6C8	-	XC9237A28CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6C8	ej	XC6107C039MR	Vdet-IC	3.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6C9	-	XC9237A29CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6C9	ej	XC6107C040MR	Vdet-IC	4.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6Ca	-	FT531Ca	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
6CA	-	XC6127N19AMR	Vdet-IC	1.9V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6CA	-	XC9237A2ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6CA	ed	XC9206A20CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6CA	ej	XC6107C041MR	Vdet-IC	4.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6Cb	-	FT531Cb	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
6CB	-	XC6127N19BMR	Vdet-IC	1.9V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6CB	-	XC9237A2BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6CB	ed	XC9206A21CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6CB	ej	XC6107C042MR	Vdet-IC	4.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6Cc	-	FT531Cc	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
6CC	-	XC6127N19CMR	Vdet-IC	1.9V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6CC	-	XC9237A2CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6CC	ed	XC9206A22CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6CC	ej	XC6107C043MR	Vdet-IC	4.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6Cd	-	FT531Cd	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
6CD	-	XC6127N19DMR	Vdet-IC	1.9V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6CD	-	XC9237A2DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6CD	ed	XC9206A23CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6CD	ej	XC6107C044MR	Vdet-IC	4.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6Ce	-	FT531Ce	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SC-70-5	28vc	VR4	6g	Fmd

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6CE	-	XC6127N19EMR	Vdet-IC	1.9V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6CE	-	XC9237A2ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6CE	ed	XC9206A24CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6CE	ej	XC6107C045MR	Vdet-IC	4.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6Cf	-	FT531Cf	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
6CF	-	XC6127N19FMR	Vdet-IC	1.9V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6CF	-	XC9237A2FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6CF	ec	XC6107C016MR	Vdet-IC	1.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CF	ed	XC9206A25CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6CF	ej	XC6107C046MR	Vdet-IC	4.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CH	-	XC6127N19GMR	Vdet-IC	1.9V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6CH	-	XC9237A2HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6CH	ec	XC6107C017MR	Vdet-IC	1.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CH	ed	XC9206A26CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6CH	ej	XC6107C047MR	Vdet-IC	4.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CK	-	XC6127N19HMR	Vdet-IC	1.9V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6CK	-	XC9237A2KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6CK	ec	XC6107C018MR	Vdet-IC	1.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CK	ed	XC9206A27CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6CK	ej	XC6107C048MR	Vdet-IC	4.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CL	-	XC6127N19JMR	Vdet-IC	1.9V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6CL	-	XC9237A2LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6CL	ec	XC6107C019MR	Vdet-IC	1.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CL	ed	XC9206A28CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6CL	ej	XC6107C049MR	Vdet-IC	4.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CM	-	XC6127N19KMR	Vdet-IC	1.9V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6CM	-	XC9237A2MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6CM	ec	XC6107C020MR	Vdet-IC	2.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CM	ed	XC9206A29CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6CM	ej	XC6107C050MR	Vdet-IC	5.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CN	-	XC6127N20AMR	Vdet-IC	2.0V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6CN	ec	XC6107C021MR	Vdet-IC	2.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CP	-	XC6127N20BMR	Vdet-IC	2.0V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6CP	ec	XC6107C022MR	Vdet-IC	2.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CR	-	XC6127N20CMR	Vdet-IC	2.0V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6CR	ec	XC6107C023MR	Vdet-IC	2.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CS	-	XC6127N20DMR	Vdet-IC	2.0V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6CS	ec	XC6107C024MR	Vdet-IC	2.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CT	-	XC6127N20EMR	Vdet-IC	2.0V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6CT	ec	XC6107C025MR	Vdet-IC	2.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CU	-	XC6127N20FMR	Vdet-IC	2.0V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6CU	ec	XC6107C026MR	Vdet-IC	2.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CV	-	XC6127N20GMR	Vdet-IC	2.0V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6CV	ec	XC6107C027MR	Vdet-IC	2.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CX	-	XC6127N20HMR	Vdet-IC	2.0V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6CX	ec	XC6107C028MR	Vdet-IC	2.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CY	-	XC6127N20JMR	Vdet-IC	2.0V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6CY	ec	XC6107C029MR	Vdet-IC	2.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6CY	ed	XC9206A2LCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6CZ	-	XC6127N20KMR	Vdet-IC	2.0V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6CZ	ec	XC6107C030MR	Vdet-IC	3.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
6D	-	R3111N361A	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
6D	-	RN5RL46AA	LVR-IC	4.6V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
6D	eu	RN5VD36CA	Vdet-IC	3.6V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
6D0	-	XC9237A30CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6D0	ej	XC6107D031MR	Vdet-IC	3.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6D1	-	XC9237A31CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6D1	ej	XC6107D032MR	Vdet-IC	3.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6D2	-	XC9237A32CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6D2	ej	XC6107D033MR	Vdet-IC	3.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6D3	-	XC9237A33CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6D3	ej	XC6107D034MR	Vdet-IC	3.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6D4	-	XC9237A34CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6D4	ej	XC6107D035MR	Vdet-IC	3.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6D5	-	XC9237A35CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6D5	ej	XC6107D036MR	Vdet-IC	3.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6D6	-	XC9237A36CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6D6	ej	XC6107D037MR	Vdet-IC	3.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6D7	-	XC9237A37CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6D7	ej	XC6107D038MR	Vdet-IC	3.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6D8	-	XC9237A38CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6D8	ej	XC6107D039MR	Vdet-IC	3.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6D9	-	XC9237A39CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6D9	ej	XC6107D040MR	Vdet-IC	4.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6Da	-	FT531Da	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
6DA	-	XC6127N21AMR	Vdet-IC	2.1V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6DA	-	XC9237A3ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6DA	ed	XC9206A30CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6DA	ej	XC6107D041MR	Vdet-IC	4.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6Db	-	FT531Db	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
6DB	-	XC6127N21BMR	Vdet-IC	2.1V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6DB	-	XC9237A3BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6DB	ed	XC9206A31CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6DB	ej	XC6107D042MR	Vdet-IC	4.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6Dc	-	FT531Dc	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
6DC	-	XC6127N21CMR	Vdet-IC	2.1V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6DC	-	XC9237A3CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6DC	ed	XC9206A32CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6DC	ej	XC6107D043MR	Vdet-IC	4.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6Dd	-	FT531Dd	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
6DD	-	XC6127N21DMR	Vdet-IC	2.1V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6DD	-	XC9237A3DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6DD	ed	XC9206A33CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6DD	ej	XC6107D044MR	Vdet-IC	4.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6De	-	FT531De	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
6DE	-	XC6127N21EMR	Vdet-IC	2.1V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6DE	-	XC9237A3ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6DE	ed	XC9206A34CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6DE	ej	XC6107D045MR	Vdet-IC	4.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6Df	-	FT531Df	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
6DF	-	XC6127N21FMR	Vdet-IC	2.1V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6DF	-	XC9237A3FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6DF	ec	XC6107D016MR	Vdet-IC	1.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DF	ed	XC9206A35CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6DF	ej	XC6107D046MR	Vdet-IC	4.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DH	-	XC6127N21GMR	Vdet-IC	2.1V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6DH	-	XC9237A3HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6DH	ec	XC6107D017MR	Vdet-IC	1.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DH	ed	XC9206A36CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6DH	ej	XC6107D047MR	Vdet-IC	4.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DK	-	XC6127N21HMR	Vdet-IC	2.1V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6DK	-	XC9237A3KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6DK	ec	XC6107D018MR	Vdet-IC	1.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DK	ed	XC9206A37CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6DK	ej	XC6107D048MR	Vdet-IC	4.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DL	-	XC6127N21JMR	Vdet-IC	2.1V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6DL	-	XC9237A3LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6DL	ec	XC6107D019MR	Vdet-IC	1.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DL	ed	XC9206A38CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6DL	ej	XC6107D049MR	Vdet-IC	4.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DM	-	XC6127N21KMR	Vdet-IC	2.1V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6DM	-	XC9237A3MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6DM	ec	XC6107D020MR	Vdet-IC	2.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DM	ed	XC9206A39CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6DM	ej	XC6107D050MR	Vdet-IC	5.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DN	-	XC6127N22AMR	Vdet-IC	2.2V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6DN	ec	XC6107D021MR	Vdet-IC	2.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DP	-	XC6127N22BMR	Vdet-IC	2.2V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6DP	ec	XC6107D022MR	Vdet-IC	2.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DR	-	XC6127N22CMR	Vdet-IC	2.2V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6DR	ec	XC6107D023MR	Vdet-IC	2.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DS	-	XC6127N22DMR	Vdet-IC	2.2V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6DS	ec	XC6107D024MR	Vdet-IC	2.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DT	-	XC6127N22EMR	Vdet-IC	2.2V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6DT	ec	XC6107D025MR	Vdet-IC	2.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DU	-	XC6127N22FMR	Vdet-IC	2.2V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6DU	ec	XC6107D026MR	Vdet-IC	2.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DV	-	XC6127N22GMR	Vdet-IC	2.2V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6DV	ec	XC6107D027MR	Vdet-IC	2.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DX	-	XC6127N22HMR	Vdet-IC	2.2V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6DX	ec	XC6107D028MR	Vdet-IC	2.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DY	-	XC6127N22JMR	Vdet-IC	2.2V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6DY	ec	XC6107D029MR	Vdet-IC	2.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6DZ	-	XC6127N22KMR	Vdet-IC	2.2V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6DZ	ec	XC6107D030MR	Vdet-IC	3.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
6E	-	R3111N461A	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
6E	-	RN5RL56AA	LVR-IC	5.6V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
6E	eu	RN5VD46CA	Vdet-IC	4.6V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
6E0	-	XC9237A40CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6E0	ej	XC6107E031MR	Vdet-IC	3.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6E1	ej	XC6107E032MR	Vdet-IC	3.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6E2	ej	XC6107E033MR	Vdet-IC	3.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6E3	ej	XC6107E034MR	Vdet-IC	3.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6E4	ej	XC6107E035MR	Vdet-IC	3.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6E5	ej	XC6107E036MR	Vdet-IC	3.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6E6	ej	XC6107E037MR	Vdet-IC	3.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6E7	ej	XC6107E038MR	Vdet-IC	3.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6E8	ej	XC6107E039MR	Vdet-IC	3.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6E9	ej	XC6107E040MR	Vdet-IC	4.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6Ea	-	FT531Ea	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
6EA	-	XC6127N23AMR	Vdet-IC	2.3V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6EA	ed	XC9206A40CM	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
6EA	ej	XC6107E041MR	Vdet-IC	4.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6Eb	-	FT531Eb	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
6EB	-	XC6127N23BMR	Vdet-IC	2.3V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6EB	ej	XC6107E042MR	Vdet-IC	4.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6Ec	-	FT531Ec	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
6EC	-	XC6127N23CMR	Vdet-IC	2.3V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6EC	ej	XC6107E043MR	Vdet-IC	4.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6Ed	-	FT531Ed	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
6ED	-	XC6127N23DMR	Vdet-IC	2.3V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6ED	ej	XC6107E044MR	Vdet-IC	4.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6Ee	-	FT531Ee	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
6EE	-	XC6127N23EMR	Vdet-IC	2.3V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6EE	ej	XC6107E045MR	Vdet-IC	4.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6Ef	-	FT531Ef	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
6EF	-	XC6127N23FMR	Vdet-IC	2.3V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6EF	ec	XC6107E016MR	Vdet-IC	1.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6EF	ej	XC6107E046MR	Vdet-IC	4.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6EH	-	XC6127N23GMR	Vdet-IC	2.3V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6EH	ec	XC6107E017MR	Vdet-IC	1.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6EH	ej	XC6107E047MR	Vdet-IC	4.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6EK	-	XC6127N23HMR	Vdet-IC	2.3V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6EK	ec	XC6107E018MR	Vdet-IC	1.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6EK	ej	XC6107E048MR	Vdet-IC	4.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6EL	-	XC6127N23JMR	Vdet-IC	2.3V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6EL	ec	XC6107E019MR	Vdet-IC	1.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6EL	ej	XC6107E049MR	Vdet-IC	4.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6EM	-	XC6127N23KMR	Vdet-IC	2.3V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6EM	ec	XC6107E020MR	Vdet-IC	2.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6EM	ej	XC6107E050MR	Vdet-IC	5.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6EN	-	XC6127N24AMR	Vdet-IC	2.4V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6EN	ec	XC6107E021MR	Vdet-IC	2.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6EP	-	XC6127N24BMR	Vdet-IC	2.4V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6EP	ec	XC6107E022MR	Vdet-IC	2.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6ER	-	XC6127N24CMR	Vdet-IC	2.4V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6ER	ec	XC6107E023MR	Vdet-IC	2.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6ES	-	XC6127N24DMR	Vdet-IC	2.4V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6ES	ec	XC6107E024MR	Vdet-IC	2.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6ET	-	XC6127N24EMR	Vdet-IC	2.4V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6ET	ec	XC6107E025MR	Vdet-IC	2.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6EU	-	XC6127N24FMR	Vdet-IC	2.4V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6EU	ec	XC6107E026MR	Vdet-IC	2.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6EV	-	XC6127N24GMR	Vdet-IC	2.4V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6EV	ec	XC6107E027MR	Vdet-IC	2.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6EX	-	XC6127N24HMR	Vdet-IC	2.4V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6EX	ec	XC6107E028MR	Vdet-IC	2.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6EY	-	XC6127N24JMR	Vdet-IC	2.4V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6EY	ec	XC6107E029MR	Vdet-IC	2.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6EZ	-	XC6127N24KMR	Vdet-IC	2.4V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6EZ	ec	XC6107E030MR	Vdet-IC	3.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
6F	-	R3111N561A	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
6F	eu	RN5VD56CA	Vdet-IC	5.6V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
6F0	ej	XC6107F031MR	Vdet-IC	3.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6F1	ej	XC6107F032MR	Vdet-IC	3.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6F2	ej	XC6107F033MR	Vdet-IC	3.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6F3	ej	XC6107F034MR	Vdet-IC	3.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6F4	ej	XC6107F035MR	Vdet-IC	3.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6F5	ej	XC6107F036MR	Vdet-IC	3.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6F6	ej	XC6107F037MR	Vdet-IC	3.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6F7	ej	XC6107F038MR	Vdet-IC	3.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6F8	-	XC9237A08DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6F8	ej	XC6107F039MR	Vdet-IC	3.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6F9	-	XC9237A09DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6F9	ej	XC6107F040MR	Vdet-IC	4.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6Fa	-	FT531Fa	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
6FA	-	XC6127N25AMR	Vdet-IC	2.5V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6FA	ej	XC6107F041MR	Vdet-IC	4.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6Fb	-	FT531Fb	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
6FB	-	XC6127N25BMR	Vdet-IC	2.5V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6FB	ej	XC6107F042MR	Vdet-IC	4.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6Fc	-	FT531Fc	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
6FC	-	XC6127N25CMR	Vdet-IC	2.5V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6FC	ej	XC6107F043MR	Vdet-IC	4.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6Fd	-	FT531Fd	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
6FD	-	XC6127N25DMR	Vdet-IC	2.5V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6FD	ej	XC6107F044MR	Vdet-IC	4.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6Fe	-	FT531Fe	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
6FE	-	XC6127N25EMR	Vdet-IC	2.5V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6FE	ej	XC6107F045MR	Vdet-IC	4.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6Ff	-	FT531Ff	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
6FF	-	XC6127N25FMR	Vdet-IC	2.5V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6FF	ec	XC6107F016MR	Vdet-IC	1.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FF	ej	XC6107F046MR	Vdet-IC	4.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FH	-	XC6127N25GMR	Vdet-IC	2.5V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6FH	ec	XC6107F017MR	Vdet-IC	1.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FH	ej	XC6107F047MR	Vdet-IC	4.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FK	-	XC6127N25HMR	Vdet-IC	2.5V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6FK	ec	XC6107F018MR	Vdet-IC	1.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FK	ej	XC6107F048MR	Vdet-IC	4.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FL	-	XC6127N25JMR	Vdet-IC	2.5V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6FL	-	XC9237A0LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6FL	ec	XC6107F019MR	Vdet-IC	1.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FL	ej	XC6107F049MR	Vdet-IC	4.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FM	-	XC6127N25KMR	Vdet-IC	2.5V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6FM	-	XC9237A0MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6FM	ec	XC6107F020MR	Vdet-IC	2.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FM	ej	XC6107F050MR	Vdet-IC	5.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FN	-	XC6127N26AMR	Vdet-IC	2.6V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6FN	ec	XC6107F021MR	Vdet-IC	2.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FP	-	XC6127N26BMR	Vdet-IC	2.6V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6FP	ec	XC6107F022MR	Vdet-IC	2.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FR	-	XC6127N26CMR	Vdet-IC	2.6V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6FR	ec	XC6107F023MR	Vdet-IC	2.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FS	-	XC6127N26DMR	Vdet-IC	2.6V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6FS	ec	XC6107F024MR	Vdet-IC	2.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FT	-	XC6127N26EMR	Vdet-IC	2.6V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6FT	ec	XC6107F025MR	Vdet-IC	2.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FU	-	XC6127N26FMR	Vdet-IC	2.6V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6FU	ec	XC6107F026MR	Vdet-IC	2.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FV	-	XC6127N26GMR	Vdet-IC	2.6V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6FV	ec	XC6107F027MR	Vdet-IC	2.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FX	-	XC6127N26HMR	Vdet-IC	2.6V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6FX	ec	XC6107F028MR	Vdet-IC	2.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FY	-	XC6127N26JMR	Vdet-IC	2.6V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6FY	ec	XC6107F029MR	Vdet-IC	2.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6FZ	-	XC6127N26KMR	Vdet-IC	2.6V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6FZ	ec	XC6107F030MR	Vdet-IC	3.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
6G5	fc	MIC5365-1.8YD5	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	TSOT-23-5	28gf	VR4	6g	Mcr
6Ga	-	FT531Ga	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6Gb	-	FT531Gb	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
6Gc	-	FT531Gc	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
6Gd	-	FT531Gd	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
6Ge	-	FT531Ge	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
6Gf	-	FT531Gf	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
6H	-	SN74AUP1T86DCK	CMOS-Log	2-input EXCLUSIVE OR gate	SC-70-5	28	Log5	6g	Ti
6H0	-	XC9237A10DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6H0	ej	XC6107H031MR	Vdet-IC	3.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6H1	-	XC9237A11DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6H1	ej	XC6107H032MR	Vdet-IC	3.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6H2	-	XC9237A12DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6H2	ej	XC6107H033MR	Vdet-IC	3.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6H3	-	XC9237A13DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6H3	ej	XC6107H034MR	Vdet-IC	3.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6H4	-	XC9237A14DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6H4	ej	XC6107H035MR	Vdet-IC	3.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6H5	-	XC9237A15DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6H5	ej	XC6107H036MR	Vdet-IC	3.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6H6	-	XC9237A16DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6H6	ej	XC6107H037MR	Vdet-IC	3.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6H7	-	XC9237A17DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6H7	ej	XC6107H038MR	Vdet-IC	3.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6H8	-	XC9237A18DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6H8	ej	XC6107H039MR	Vdet-IC	3.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6H9	-	XC9237A19DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6H9	ej	XC6107H040MR	Vdet-IC	4.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6Ha	-	FT531Ha	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
6HA	-	XC6127N27AMR	Vdet-IC	2.7V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6HA	-	XC9237A1ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6HA	ej	XC6107H041MR	Vdet-IC	4.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6Hb	-	FT531Hb	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
6HB	-	XC6127N27BMR	Vdet-IC	2.7V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6HB	-	XC9237A1BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6HB	ej	XC6107H042MR	Vdet-IC	4.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6Hc	-	FT531Hc	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
6HC	-	XC6127N27CMR	Vdet-IC	2.7V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6HC	-	XC9237A1CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6HC	ej	XC6107H043MR	Vdet-IC	4.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6Hd	-	FT531Hd	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
6HD	-	XC6127N27DMR	Vdet-IC	2.7V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6HD	-	XC9237A1DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6HD	ej	XC6107H044MR	Vdet-IC	4.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6He	-	FT531He	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
6HE	-	XC6127N27EMR	Vdet-IC	2.7V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6HE	-	XC9237A1EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6HE	ej	XC6107H045MR	Vdet-IC	4.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6Hf	-	FT531Hf	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
6HF	-	XC6127N27FMR	Vdet-IC	2.7V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6HF	-	XC9237A1FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6HF	ec	XC6107H016MR	Vdet-IC	1.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HF	ej	XC6107H046MR	Vdet-IC	4.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HH	-	XC6127N27GMR	Vdet-IC	2.7V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6HH	-	XC9237A1HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6HH	ec	XC6107H017MR	Vdet-IC	1.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HH	ej	XC6107H047MR	Vdet-IC	4.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HK	-	XC6127N27HMR	Vdet-IC	2.7V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6HK	-	XC9237A1KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6HK	ec	XC6107H018MR	Vdet-IC	1.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HK	ej	XC6107H048MR	Vdet-IC	4.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HL	-	XC6127N27JMR	Vdet-IC	2.7V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6HL	-	XC9237A1LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6HL	ec	XC6107H019MR	Vdet-IC	1.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HL	ej	XC6107H049MR	Vdet-IC	4.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HM	-	XC6127N27KMR	Vdet-IC	2.7V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6HM	-	XC9237A1MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6HM	ec	XC6107H020MR	Vdet-IC	2.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HM	ej	XC6107H050MR	Vdet-IC	5.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HN	-	XC6127N28AMR	Vdet-IC	2.8V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6HN	ec	XC6107H021MR	Vdet-IC	2.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HP	-	XC6127N28BMR	Vdet-IC	2.8V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6HP	ec	XC6107H022MR	Vdet-IC	2.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HR	-	XC6127N28CMR	Vdet-IC	2.8V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6HR	ec	XC6107H023MR	Vdet-IC	2.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HS	-	XC6127N28DMR	Vdet-IC	2.8V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6HS	ec	XC6107H024MR	Vdet-IC	2.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HT	-	XC6127N28EMR	Vdet-IC	2.8V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6HT	ec	XC6107H025MR	Vdet-IC	2.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HU	-	XC6127N28FMR	Vdet-IC	2.8V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6HU	ec	XC6107H026MR	Vdet-IC	2.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HV	-	XC6127N28GMR	Vdet-IC	2.8V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6HV	ec	XC6107H027MR	Vdet-IC	2.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HX	-	XC6127N28HMR	Vdet-IC	2.8V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6HX	ec	XC6107H028MR	Vdet-IC	2.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HY	-	XC6127N28JMR	Vdet-IC	2.8V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6HY	ec	XC6107H029MR	Vdet-IC	2.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6HZ	-	XC6127N28KMR	Vdet-IC	2.8V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6HZ	ec	XC6107H030MR	Vdet-IC	3.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
6Ia	-	FT531Ia	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
6Ib	-	FT531Ib	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
6Ic	-	FT531Ic	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
6Id	-	FT531Id	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
6Ie	-	FT531Ie	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
6If	-	FT531If	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
6J	-	R3111N161C	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
6J	-	SN74AUP1T87DCK	CMOS-Log	2-input EXCLUSIVE NOR gate	SC-70-5	28	Log81	6g	Ti
6Ja	-	FT531Ja	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
6Jb	-	FT531Jb	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
6Jc	-	FT531Jc	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
6Jd	-	FT531Jd	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
6Je	-	FT531Je	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
6Jf	-	FT531Jf	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
6K	-	R3111N261C	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
6K0	-	XC9237A20DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6K1	-	XC9237A21DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6K2	-	XC9237A22DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6K3	-	XC9237A23DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6K4	-	XC9237A24DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6K5	-	XC9237A25DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6K6	-	XC9237A26DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6K7	-	XC9237A27DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6K8	-	XC9237A28DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6K9	-	XC9237A29DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6Ka	-	FT531Ka	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
6KA	-	XC6127N29AMR	Vdet-IC	2.9V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6KA	-	XC9237A2ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6Kb	-	FT531Kb	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
6KB	-	XC6127N29BMR	Vdet-IC	2.9V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6KB	-	XC9237A2BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6Kc	-	FT531Kc	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
6KC	-	XC6127N29CMR	Vdet-IC	2.9V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6KC	-	XC9237A2CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6Kd	-	FT531Kd	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
6KD	-	XC6127N29DMR	Vdet-IC	2.9V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6KD	-	XC9237A2DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6Ke	-	FT531Ke	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
6KE	-	XC6127N29EMR	Vdet-IC	2.9V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6KE	-	XC9237A2EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6Kf	-	FT531Kf	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
6KF	-	XC6127N29FMR	Vdet-IC	2.9V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6KF	-	XC9237A2FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6KH	-	XC6127N29GMR	Vdet-IC	2.9V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6KH	-	XC9237A2HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6KK	-	XC6127N29HMR	Vdet-IC	2.9V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6KK	-	XC9237A2KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6KL	-	XC6127N29JMR	Vdet-IC	2.9V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6KL	-	XC9237A2LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6KM	-	XC6127N29KMR	Vdet-IC	2.9V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6KM	-	XC9237A2MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6KN	-	XC6127N30AMR	Vdet-IC	3.0V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6KP	-	XC6127N30BMR	Vdet-IC	3.0V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6KR	-	XC6127N30CMR	Vdet-IC	3.0V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6KS	-	XC6127N30DMR	Vdet-IC	3.0V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6KT	-	XC6127N30EMR	Vdet-IC	3.0V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6KU	-	XC6127N30FMR	Vdet-IC	3.0V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6KV	-	XC6127N30GMR	Vdet-IC	3.0V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6KX	-	XC6127N30HMR	Vdet-IC	3.0V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6KY	-	XC6127N30JMR	Vdet-IC	3.0V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6KZ	-	XC6127N30KMR	Vdet-IC	3.0V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6L	-	R3111N361C	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
6L0	-	XC9237A30DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6L1	-	XC9237A31DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6L2	-	XC9237A32DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6L3	-	XC9237A33DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6L4	-	XC9237A34DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6L5	-	XC9237A35DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6L6	-	XC9237A36DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6L7	-	XC9237A37DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6L8	-	XC9237A38DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6L9	-	XC9237A39DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6LA	-	XC6127N31AMR	Vdet-IC	3.1V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6LA	-	XC9237A3ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6LB	-	XC6127N31BMR	Vdet-IC	3.1V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6LB	-	XC9237A3BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6LC	-	XC6127N31CMR	Vdet-IC	3.1V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6LC	-	XC9237A3CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6LD	-	XC6127N31DMR	Vdet-IC	3.1V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6LD	-	XC9237A3DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6LE	-	XC6127N31EMR	Vdet-IC	3.1V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6LE	-	XC9237A3EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6LF	-	XC6127N31FMR	Vdet-IC	3.1V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6LF	-	XC9237A3FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6LH	-	XC6127N31GMR	Vdet-IC	3.1V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6LH	-	XC9237A3HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6LK	-	XC6127N31HMR	Vdet-IC	3.1V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6LK	-	XC9237A3KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6LL	-	XC6127N31JMR	Vdet-IC	3.1V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6LL	-	XC9237A3LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6LM	-	XC6127N31KMR	Vdet-IC	3.1V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6LM	-	XC9237A3MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6LN	-	XC6127N32AMR	Vdet-IC	3.2V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6LP	-	XC6127N32BMR	Vdet-IC	3.2V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6LR	-	XC6127N32CMR	Vdet-IC	3.2V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6LS	-	XC6127N32DMR	Vdet-IC	3.2V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6LT	-	XC6127N32EMR	Vdet-IC	3.2V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6LU	-	XC6127N32FMR	Vdet-IC	3.2V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6LV	-	XC6127N32GMR	Vdet-IC	3.2V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6LX	-	XC6127N32HMR	Vdet-IC	3.2V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6LY	-	XC6127N32JMR	Vdet-IC	3.2V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6LZ	-	XC6127N32KMR	Vdet-IC	3.2V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6M	-	R3111N461C	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
6M0	-	XC9237A40DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST	SOT-25	28dc4	DC1	6g	Tor
6M5	fc	MIC5365-2.8YD5	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	TSOT-23-5	28gf	VR4	6g	Mcr
6MA	-	XC6127N33AMR	Vdet-IC	3.3V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6MB	-	XC6127N33BMR	Vdet-IC	3.3V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6MC	-	XC6127N33CMR	Vdet-IC	3.3V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6MD	-	XC6127N33DMR	Vdet-IC	3.3V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6ME	-	XC6127N33EMR	Vdet-IC	3.3V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6MF	-	XC6127N33FMR	Vdet-IC	3.3V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6MH	-	XC6127N33GMR	Vdet-IC	3.3V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6MK	-	XC6127N33HMR	Vdet-IC	3.3V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6ML	-	XC6127N33JMR	Vdet-IC	3.3V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6MM	-	XC6127N33KMR	Vdet-IC	3.3V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6MN	-	XC6127N34AMR	Vdet-IC	3.4V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6MP	-	XC6127N34BMR	Vdet-IC	3.4V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6MR	-	XC6127N34CMR	Vdet-IC	3.4V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6MS	-	XC6127N34DMR	Vdet-IC	3.4V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6MT	-	XC6127N34EMR	Vdet-IC	3.4V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6MU	-	XC6127N34FMR	Vdet-IC	3.4V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6MV	-	XC6127N34GMR	Vdet-IC	3.4V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6MX	-	XC6127N34HMR	Vdet-IC	3.4V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6MY	-	XC6127N34JMR	Vdet-IC	3.4V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6MZ	-	XC6127N34KMR	Vdet-IC	3.4V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6N	-	R3111N561C	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
6N5	fc	MIC5365-2.85YD5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	TSOT-23-5	28gf	VR4	6g	Mcr
6N8	-	XC9237E08CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6N9	-	XC9237E09CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6NA	-	XC6127N35AMR	Vdet-IC	3.5V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6NB	-	XC6127N35BMR	Vdet-IC	3.5V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6NC	-	XC6127N35CMR	Vdet-IC	3.5V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6ND	-	XC6127N35DMR	Vdet-IC	3.5V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6NE	-	XC6127N35EMR	Vdet-IC	3.5V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6NF	-	XC6127N35FMR	Vdet-IC	3.5V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6NH	-	XC6127N35GMR	Vdet-IC	3.5V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6NK	-	XC6127N35HMR	Vdet-IC	3.5V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6NL	-	XC6127N35JMR	Vdet-IC	3.5V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6NL	-	XC9237E0LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6NM	-	XC6127N35KMR	Vdet-IC	3.5V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6NM	-	XC9237E0MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6NN	-	XC6127N36AMR	Vdet-IC	3.6V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6NP	-	XC6127N36BMR	Vdet-IC	3.6V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6NR	-	XC6127N36CMR	Vdet-IC	3.6V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6NS	-	XC6127N36DMR	Vdet-IC	3.6V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6NT	-	XC6127N36EMR	Vdet-IC	3.6V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6NU	-	XC6127N36FMR	Vdet-IC	3.6V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6NV	-	XC6127N36GMR	Vdet-IC	3.6V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6NX	-	XC6127N36HMR	Vdet-IC	3.6V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6NY	-	XC6127N36JMR	Vdet-IC	3.6V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6NZ	-	XC6127N36KMR	Vdet-IC	3.6V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6P0	-	XC9237E10CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6P1	-	XC9237E11CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6P2	-	XC9237E12CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6P3	-	XC9237E13CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6P4	-	XC9237E14CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6P5	-	XC9237E15CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6P6	-	XC9237E16CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6P7	-	XC9237E17CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6P8	-	XC9237E18CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6P9	-	XC9237E19CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6PA	-	XC6127N37AMR	Vdet-IC	3.7V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6PA	-	XC9237E1ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6PB	-	XC6127N37BMR	Vdet-IC	3.7V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6PB	-	XC9237E1BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6PC	-	XC6127N37CMR	Vdet-IC	3.7V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6PC	-	XC9237E1CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6PD	-	XC6127N37DMR	Vdet-IC	3.7V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6PD	-	XC9237E1DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6PE	-	XC6127N37EMR	Vdet-IC	3.7V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6PE	-	XC9237E1ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6PF	-	XC6127N37FMR	Vdet-IC	3.7V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6PF	-	XC9237E1FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6PH	-	XC6127N37GMR	Vdet-IC	3.7V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6PH	-	XC9237E1HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6PK	-	XC6127N37HMR	Vdet-IC	3.7V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6PK	-	XC9237E1KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6PL	-	XC6127N37JMR	Vdet-IC	3.7V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6PL	-	XC9237E1LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6PM	-	XC6127N37KMR	Vdet-IC	3.7V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6PM	-	XC9237E1MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6PN	-	XC6127N38AMR	Vdet-IC	3.8V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6PP	-	XC6127N38BMR	Vdet-IC	3.8V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6PR	-	XC6127N38CMR	Vdet-IC	3.8V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6PS	-	XC6127N38DMR	Vdet-IC	3.8V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6PT	-	XC6127N38EMR	Vdet-IC	3.8V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6PU	-	XC6127N38FMR	Vdet-IC	3.8V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6PV	-	XC6127N38GMR	Vdet-IC	3.8V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6PX	-	XC6127N38HMR	Vdet-IC	3.8V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6PY	-	XC6127N38JMR	Vdet-IC	3.8V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6PZ	-	XC6127N38KMR	Vdet-IC	3.8V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6Q	-	R1210N261A	DC-DC-IC	PWM step-up, 2.6V, 35..100kHz	SOT-23-5	28sc	DC3	6g	Ric
6R0	-	XC9237E20CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6R1	-	XC9237E21CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6R2	-	XC9237E22CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6R3	-	XC9237E23CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6R4	-	XC9237E24CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6R5	-	XC9237E25CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6R6	-	XC9237E26CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6R7	-	XC9237E27CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6R8	-	XC9237E28CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6R9	-	XC9237E29CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6RA	-	XC6127N39AMR	Vdet-IC	3.9V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6RA	-	XC9237E2ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6RB	-	XC6127N39BMR	Vdet-IC	3.9V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6RB	-	XC9237E2BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6RC	-	XC6127N39CMR	Vdet-IC	3.9V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6RC	-	XC9237E2CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6RD	-	XC6127N39DMR	Vdet-IC	3.9V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6RD	-	XC9237E2DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6RE	-	XC6127N39EMR	Vdet-IC	3.9V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6RE	-	XC9237E2ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6RF	-	XC6127N39FMR	Vdet-IC	3.9V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6RF	-	XC9237E2FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6RH	-	XC6127N39GMR	Vdet-IC	3.9V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6RH	-	XC9237E2HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6RK	-	XC6127N39HMR	Vdet-IC	3.9V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6RK	-	XC9237E2KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6RL	-	XC6127N39JMR	Vdet-IC	3.9V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6RL	-	XC9237E2LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6RM	-	XC6127N39KMR	Vdet-IC	3.9V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6RM	-	XC9237E2MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6RN	-	XC6127N40AMR	Vdet-IC	4.0V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6RP	-	XC6127N40BMR	Vdet-IC	4.0V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6RR	-	XC6127N40CMR	Vdet-IC	4.0V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6RS	-	XC6127N40DMR	Vdet-IC	4.0V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6RT	-	XC6127N40EMR	Vdet-IC	4.0V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6RU	-	XC6127N40FMR	Vdet-IC	4.0V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6RV	-	XC6127N40GMR	Vdet-IC	4.0V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6RX	-	XC6127N40HMR	Vdet-IC	4.0V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6RY	-	XC6127N40JMR	Vdet-IC	4.0V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6RZ	-	XC6127N40KMR	Vdet-IC	4.0V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6S	-	RN5RF16AA	LVR-IC	LRip, -CE, 1.6V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
6S0	-	XC9237E30CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6S1	-	XC9237E31CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6S2	-	XC9237E32CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6S3	-	XC9237E33CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6S4	-	XC9237E34CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6S5	-	XC9237E35CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6S5	fc	MIC5365-3.3YD5	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	TSOT-23-5	28gf	VR4	6g	Mcr
6S6	-	XC9237E36CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6S7	-	XC9237E37CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6S8	-	XC9237E38CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6S9	-	XC9237E39CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6SA	-	XC6127N41AMR	Vdet-IC	4.1V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6SA	-	XC9237E3ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6SB	-	XC6127N41BMR	Vdet-IC	4.1V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6SB	-	XC9237E3BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6SC	-	XC6127N41CMR	Vdet-IC	4.1V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6SC	-	XC9237E3CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6SD	-	XC6127N41DMR	Vdet-IC	4.1V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6SD	-	XC9237E3DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6SE	-	XC6127N41EMR	Vdet-IC	4.1V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6SE	-	XC9237E3ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6SF	-	XC6127N41FMR	Vdet-IC	4.1V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6SF	-	XC9237E3FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6SH	-	XC6127N41GMR	Vdet-IC	4.1V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6SH	-	XC9237E3HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6SK	-	XC6127N41HMR	Vdet-IC	4.1V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6SK	-	XC9237E3KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6SL	-	XC6127N41JMR	Vdet-IC	4.1V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6SL	-	XC9237E3LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6SM	-	XC6127N41KMR	Vdet-IC	4.1V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6SM	-	XC9237E3MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6SN	-	XC6127N42AMR	Vdet-IC	4.2V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6SP	-	XC6127N42BMR	Vdet-IC	4.2V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6SR	-	XC6127N42CMR	Vdet-IC	4.2V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6SS	-	XC6127N42DMR	Vdet-IC	4.2V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6ST	-	XC6127N42EMR	Vdet-IC	4.2V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6SU	-	XC6127N42FMR	Vdet-IC	4.2V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6SV	-	XC6127N42GMR	Vdet-IC	4.2V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6SX	-	XC6127N42HMR	Vdet-IC	4.2V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6SY	-	XC6127N42JMR	Vdet-IC	4.2V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6SZ	-	XC6127N42KMR	Vdet-IC	4.2V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6T	-	RN5RF16BA	LVR-IC	LRip, +CE, 1.6V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
6T0	-	XC9237E40CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6TA	-	XC6127N43AMR	Vdet-IC	4.3V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6TB	-	XC6127N43BMR	Vdet-IC	4.3V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6TC	-	XC6127N43CMR	Vdet-IC	4.3V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6TD	-	XC6127N43DMR	Vdet-IC	4.3V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6TE	-	XC6127N43EMR	Vdet-IC	4.3V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6TF	-	XC6127N43FMR	Vdet-IC	4.3V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6TH	-	XC6127N43GMR	Vdet-IC	4.3V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6TK	-	XC6127N43HMR	Vdet-IC	4.3V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6TL	-	XC6127N43JMR	Vdet-IC	4.3V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6TM	-	XC6127N43KMR	Vdet-IC	4.3V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6TN	-	XC6127N44AMR	Vdet-IC	4.4V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6TP	-	XC6127N44BMR	Vdet-IC	4.4V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6TR	-	XC6127N44CMR	Vdet-IC	4.4V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6TS	-	XC6127N44DMR	Vdet-IC	4.4V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6TT	-	RXC6127N44EMR	Vdet-IC	4.4V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6TU	-	XC6127N44FMR	Vdet-IC	4.4V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6TV	-	XC6127N44GMR	Vdet-IC	4.4V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6TX	-	XC6127N44HMR	Vdet-IC	4.4V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6TY	-	XC6127N44JMR	Vdet-IC	4.4V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6TZ	-	XC6127N44KMR	Vdet-IC	4.4V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6U	-	R1210N261C	DC-DC-IC	PWM step-up, 2.6V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
6U8	-	XC9237E08DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6U9	-	XC9237E09DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6UA	-	XC6127N45AMR	Vdet-IC	4.5V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6UB	-	XC6127N45BMR	Vdet-IC	4.5V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6UC	-	XC6127N45CMR	Vdet-IC	4.5V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6UD	-	XC6127N45DMR	Vdet-IC	4.5V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6UE	-	XC6127N45EMR	Vdet-IC	4.5V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6UF	-	XC6127N45FMR	Vdet-IC	4.5V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6UH	-	XC6127N45GMR	Vdet-IC	4.5V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6UK	-	XC6127N45HMR	Vdet-IC	4.5V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6UL	-	XC6127N45JMR	Vdet-IC	4.5V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6UL	-	XC9237E0LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6UM	-	XC6127N45KMR	Vdet-IC	4.5V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6UM	-	XC9237E0MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6UN	-	XC6127N46AMR	Vdet-IC	4.6V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6UP	-	XC6127N46BMR	Vdet-IC	4.6V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6UR	-	XC6127N46CMR	Vdet-IC	4.6V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6US	-	XC6127N46DMR	Vdet-IC	4.6V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6UT	-	XC6127N46EMR	Vdet-IC	4.6V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6UU	-	XC6127N46FMR	Vdet-IC	4.6V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6UV	-	XC6127N46GMR	Vdet-IC	4.6V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6UX	-	XC6127N46HMR	Vdet-IC	4.6V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6UY	-	XC6127N46JMR	Vdet-IC	4.6V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6UZ	-	XC6127N46KMR	Vdet-IC	4.6V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6V0	-	XC9237E10DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6V1	-	XC9237E11DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6V2	-	XC9237E12DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6V3	-	XC9237E13DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6V4	-	XC9237E14DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6V5	-	XC9237E15DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6V6	-	XC9237E16DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6V7	-	XC9237E17DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6V8	-	XC9237E18DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6V9	-	XC9237E19DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6VA	-	XC6127N47AMR	Vdet-IC	4.7V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6VA	-	XC9237E1ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6VB	-	XC6127N47BMR	Vdet-IC	4.7V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6VB	-	XC9237E1BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6VC	-	XC6127N47CMR	Vdet-IC	4.7V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6VC	-	XC9237E1CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6VD	-	XC6127N47DMR	Vdet-IC	4.7V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6VD	-	XC9237E1DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6VE	-	XC6127N47EMR	Vdet-IC	4.7V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6VE	-	XC9237E1EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6VF	-	XC6127N47FMR	Vdet-IC	4.7V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6VF	-	XC9237E1FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6VH	-	XC6127N47GMR	Vdet-IC	4.7V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6VH	-	XC9237E1HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6VK	-	XC6127N47HMR	Vdet-IC	4.7V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6VK	-	XC9237E1KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6VL	-	XC6127N47JMR	Vdet-IC	4.7V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6VL	-	XC9237E1LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6VM	-	XC6127N47KMR	Vdet-IC	4.7V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6VM	-	XC9237E1MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6VN	-	XC6127N48AMR	Vdet-IC	4.8V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6VP	-	XC6127N48BMR	Vdet-IC	4.8V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6VR	-	XC6127N48CMR	Vdet-IC	4.8V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6VS	-	XC6127N48DMR	Vdet-IC	4.8V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6VT	-	XC6127N48EMR	Vdet-IC	4.8V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6VU	-	XC6127N48FMR	Vdet-IC	4.8V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6VV	-	XC6127N48GMR	Vdet-IC	4.8V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6VX	-	XC6127N48HMR	Vdet-IC	4.8V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6VY	-	XC6127N48JMR	Vdet-IC	4.8V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6VZ	-	XC6127N48KMR	Vdet-IC	4.8V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6W	-	R1210N361C	DC-DC-IC	PWM step-up, 3.6V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
6X	-	R1210N461C	DC-DC-IC	PWM step-up, 4.6V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
6X0	-	XC9237E20DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6X1	-	XC9237E21DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6X2	-	XC9237E22DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6X3	-	XC9237E23DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6X4	-	XC9237E24DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6X5	-	XC9237E25DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6X6	-	XC9237E26DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6X7	-	XC9237E27DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6X8	-	XC9237E28DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6X9	-	XC9237E29DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6XA	-	XC6127N49AMR	Vdet-IC	4.9V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6XA	-	XC9237E2ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6XB	-	XC6127N49BMR	Vdet-IC	4.9V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6XB	-	XC9237E2BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6XC	-	XC6127N49CMR	Vdet-IC	4.9V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6XC	-	XC9237E2CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6XD	-	XC6127N49DMR	Vdet-IC	4.9V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6XD	-	XC9237E2DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6XE	-	XC6127N49EMR	Vdet-IC	4.9V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6XE	-	XC9237E2EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6XF	-	XC6127N49FMR	Vdet-IC	4.9V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6XF	-	XC9237E2FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6XH	-	XC6127N49GMR	Vdet-IC	4.9V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6XH	-	XC9237E2HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6XK	-	XC6127N49HMR	Vdet-IC	4.9V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6XK	-	XC9237E2KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6XL	-	XC6127N49JMR	Vdet-IC	4.9V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6XL	-	XC9237E2LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6XM	-	XC6127N49KMR	Vdet-IC	4.9V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6XM	-	XC9237E2MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6XN	-	XC6127N50AMR	Vdet-IC	5.0V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6XP	-	XC6127N50BMR	Vdet-IC	5.0V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6XR	-	XC6127N50CMR	Vdet-IC	5.0V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6XS	-	XC6127N50DMR	Vdet-IC	5.0V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6XT	-	XC6127N50EMR	Vdet-IC	5.0V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6XU	-	XC6127N50FMR	Vdet-IC	5.0V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6XV	-	XC6127N50GMR	Vdet-IC	5.0V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6XX	-	XC6127N50HMR	Vdet-IC	5.0V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6XY	-	XC6127N50JMR	Vdet-IC	5.0V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6XZ	-	XC6127N50KMR	Vdet-IC	5.0V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6Y	-	R1210N561C	DC-DC-IC	PWM step-up, 5.6V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
6Y0	-	XC9237E30DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6Y1	-	XC9237E31DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6Y2	-	XC9237E32DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6Y3	-	XC9237E33DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6Y4	-	XC9237E34DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6Y5	-	XC9237E35DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6Y6	-	XC9237E36DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6Y7	-	XC9237E37DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6Y8	-	XC9237E38DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6Y9	-	XC9237E39DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6YA	-	XC6127N51AMR	Vdet-IC	5.1V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6YA	-	XC9237E3ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6YB	-	XC6127N51BMR	Vdet-IC	5.1V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6YB	-	XC9237E3BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6YC	-	XC6127N51CMR	Vdet-IC	5.1V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6YC	-	XC9237E3CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6YD	-	XC6127N51DMR	Vdet-IC	5.1V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6YD	-	XC9237E3DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6YE	-	XC6127N51EMR	Vdet-IC	5.1V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6YE	-	XC9237E3EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6YF	-	XC6127N51FMR	Vdet-IC	5.1V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6YF	-	XC9237E3FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6YH	-	XC6127N51GMR	Vdet-IC	5.1V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6YH	-	XC9237E3HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6YK	-	XC6127N51HMR	Vdet-IC	5.1V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6YK	-	XC9237E3KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6YL	-	XC6127N51JMR	Vdet-IC	5.1V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6YL	-	XC9237E3LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6YM	-	XC6127N51KMR	Vdet-IC	5.1V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6YM	-	XC9237E3MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6YN	-	XC6127N52AMR	Vdet-IC	5.2V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6YP	-	XC6127N52BMR	Vdet-IC	5.2V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6YR	-	XC6127N52CMR	Vdet-IC	5.2V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6YS	-	XC6127N52DMR	Vdet-IC	5.2V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6YT	-	XC6127N52EMR	Vdet-IC	5.2V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6YU	-	XC6127N52FMR	Vdet-IC	5.2V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6YV	-	XC6127N52GMR	Vdet-IC	5.2V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6YX	-	XC6127N52HMR	Vdet-IC	5.2V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6YY	-	XC6127N52JMR	Vdet-IC	5.2V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6YZ	-	XC6127N52KMR	Vdet-IC	5.2V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6Z	-	R1210N261D	DC-DC-IC	PWM step-up, 2.6V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
6Z0	-	XC9237E40DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
6ZA	-	XC6127N53AMR	Vdet-IC	5.3V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6ZB	-	XC6127N53BMR	Vdet-IC	5.3V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6ZC	-	XC6127N53CMR	Vdet-IC	5.3V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6ZD	-	XC6127N53DMR	Vdet-IC	5.3V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6ZE	-	XC6127N53EMR	Vdet-IC	5.3V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6ZF	-	XC6127N53FMR	Vdet-IC	5.3V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6ZH	-	XC6127N53GMR	Vdet-IC	5.3V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6ZK	-	XC6127N53HMR	Vdet-IC	5.3V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6ZL	-	XC6127N53JMR	Vdet-IC	5.3V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6ZM	-	XC6127N53KMR	Vdet-IC	5.3V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6ZN	-	XC6127N54AMR	Vdet-IC	5.4V±0.8%, -Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6ZP	-	XC6127N54BMR	Vdet-IC	5.4V±0.8%, -Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6ZR	-	XC6127N54CMR	Vdet-IC	5.4V±0.8%, -Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6ZS	-	XC6127N54DMR	Vdet-IC	5.4V±0.8%, -Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6ZT	-	XC6127N54EMR	Vdet-IC	5.4V±0.8%, -Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
6ZU	-	XC6127N54FMR	Vdet-IC	5.4V±0.8%, +Reset ODO, -MR, Rt=50ms	SOT-25	28yx	VD4	6g	Tor
6ZV	-	XC6127N54GMR	Vdet-IC	5.4V±0.8%, +Reset ODO, -MR, Rt=100ms	SOT-25	28yx	VD4	6g	Tor
6ZX	-	XC6127N54HMR	Vdet-IC	5.4V±0.8%, +Reset ODO, -MR, Rt=200ms	SOT-25	28yx	VD4	6g	Tor
6ZY	-	XC6127N54JMR	Vdet-IC	5.4V±0.8%, +Reset ODO, -MR, Rt=400ms	SOT-25	28yx	VD4	6g	Tor
6ZZ	-	XC6127N54KMR	Vdet-IC	5.4V±0.8%, +Reset ODO, -MR, Rt=800ms	SOT-25	28yx	VD4	6g	Tor
70	-	RN5RF20BA	LVR-IC	LRip, +CE, 2V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
70	-	RN5RZ20BA	LVR-IC	LDO, LN, 2V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
700	-	R1191N100D	LVR-IC	LDO, 10.0V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
700	ej	XC6111A131MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
701	-	R1191N101D	LVR-IC	LDO, 10.1V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
701	ej	XC6111A132MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
702	-	R1191N102D	LVR-IC	LDO, 10.2V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
702	ej	XC6111A133MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
703	-	R1191N103D	LVR-IC	LDO, 10.3V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
703	ej	XC6111A134MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
704	-	R1191N104D	LVR-IC	LDO, 10.4V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
704	ej	XC6111A135MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
705	-	R1191N105D	LVR-IC	LDO, 10.5V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
705	ej	XC6111A136MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
706	-	R1191N106D	LVR-IC	LDO, 10.6V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
706	ej	XC6111A137MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
707	-	R1191N107D	LVR-IC	LDO, 10.7V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
707	ej	XC6111A138MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
708	-	R1191N108D	LVR-IC	LDO, 10.8V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
708	ej	XC6111A139MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
709	-	R1191N109D	LVR-IC	LDO, 10.9V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
709	ed	XC9207A093M	DC-DC-IC	PWM/PFM step-down, 300kHz, 0.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
709	ej	XC6111A140MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70A	-	RP101N121B	LVR-IC	LDO, LN, 1.2V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70A	ej	XC6111A141MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70B	-	RP101N131B	LVR-IC	LDO, LN, 1.3V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70B	ej	XC6111A142MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70C	-	RP101N151B	LVR-IC	LDO, LN, 1.5V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70C	ej	XC6111A143MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70D	-	RP101N181B	LVR-IC	LDO, LN, 1.8V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70D	ej	XC6111A144MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70E	-	RP101N181B5	LVR-IC	LDO, LN, 1.85V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70E	ej	XC6111A145MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70F	-	RP101N191B	LVR-IC	LDO, LN, 1.9V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70F	ec	XC6111A116MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70F	ej	XC6111A146MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70G	-	RP101N201B	LVR-IC	LDO, LN, 2.0V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70H	-	RP101N251B	LVR-IC	LDO, LN, 2.5V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70H	ec	XC6111A117MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70H	ej	XC6111A147MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70J	-	RP101N261B	LVR-IC	LDO, LN, 2.6V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70K	-	RP101N271B	LVR-IC	LDO, LN, 2.7V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70K	ec	XC6111A118MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70K	ej	XC6111A148MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70L	-	RP101N281B	LVR-IC	LDO, LN, 2.8V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70L	ec	XC6111A119MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70L	ej	XC6111A149MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70M	-	RP101N281B5	LVR-IC	LDO, LN, 2.85V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70M	ec	XC6111A120MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70M	ed	XC9207A096M	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
70M	ej	XC6111A150MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70N	-	RP101N291B	LVR-IC	LDO, LN, 2.9V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70N	ec	XC6111A121MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70P	-	RP101N301B	LVR-IC	LDO, LN, 3.0V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70P	ec	XC6111A122MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70Q	-	RP101N311B	LVR-IC	LDO, LN, 3.1V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70R	-	RP101N331B	LVR-IC	LDO, LN, 3.3V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70R	ec	XC6111A123MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70S	-	RP101N211B	LVR-IC	LDO, LN, 2.1V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70S	ec	XC6111A124MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70T	-	RP101N231B	LVR-IC	LDO, LN, 2.3V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70T	ec	XC6111A125MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70U	-	RP101N241B	LVR-IC	LDO, LN, 2.4V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70U	ec	XC6111A126MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70V	-	RP101N321B	LVR-IC	LDO, LN, 3.2V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70V	ec	XC6111A127MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70W	-	RP101N221B	LVR-IC	LDO, LN, 2.2V±0.8%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
70X	ec	XC6111A128MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70Y	ec	XC6111A129MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
70Z	ec	XC6111A130MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71	-	RN5RF21BA	LVR-IC	LRip, +CE, 2.1V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
71	-	RN5RZ21BA	LVR-IC	LDO, LN, 2.1V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
710	-	R1191N110D	LVR-IC	LDO, 11.0V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
710	ed	XC9207A103M	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
710	ej	XC6111A231MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
711	-	R1191N111D	LVR-IC	LDO, 11.1V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
711	ed	XC9207A113M	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
711	ej	XC6111A232MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
712	-	R1191N112D	LVR-IC	LDO, 11.2V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
712	ed	XC9207A123M	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
712	ej	XC6111A233MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
713	-	R1191N113D	LVR-IC	LDO, 11.3V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
713	ed	XC9207A133M	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
713	ej	XC6111A234MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
714	-	R1191N114D	LVR-IC	LDO, 11.4V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
714	ed	XC9207A143M	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
714	ej	XC6111A235MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
715	-	R1124N151A	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
715	-	R1191N115D	LVR-IC	LDO, 11.5V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
715	ed	XC9207A153M	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
715	eh	XC9111E151MR	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
715	ej	XC6111A236MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
716	-	R1124N161A	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
716	-	R1191N116D	LVR-IC	LDO, 11.6V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
716	ed	XC9207A163M	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
716	eh	XC9111E161MR	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
716	ej	XC6111A237MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
717	-	R1124N171A	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
717	-	R1191N117D	LVR-IC	LDO, 11.7V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
717	ed	XC9207A173M	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
717	eh	XC9111E171MR	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
717	ej	XC6111A238MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
718	-	R1124N181A	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
718	-	R1191N118D	LVR-IC	LDO, 11.8V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
718	ed	XC9207A183M	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
718	eh	XC9111E181MR	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
718	ej	XC6111A239MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
719	-	R1124N191A	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
719	-	R1191N119D	LVR-IC	LDO, 11.9V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
719	ed	XC9207A193M	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
719	eh	XC9111E191MR	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
719	ej	XC6111A240MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71A	-	RP101N121D	LVR-IC	LDO, LN, 1.2V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71A	ed	XC9207A106M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
71A	ej	XC6111A241MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71B	-	RP101N131D	LVR-IC	LDO, LN, 1.3V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71B	ed	XC9207A116M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
71B	ej	XC6111A242MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71C	-	RP101N151D	LVR-IC	LDO, LN, 1.5V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71C	ed	XC9207A126M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
71C	ej	XC6111A243MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71D	-	RP101N181D	LVR-IC	LDO, LN, 1.8V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71D	ed	XC9207A136M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
71D	ej	XC6111A244MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71E	-	RP101N181D5	LVR-IC	LDO, LN, 1.85V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71E	ed	XC9207A146M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
71E	ej	XC6111A245MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71F	-	RP101N191D	LVR-IC	LDO, LN, 1.9V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71F	ec	XC6111A216MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71F	ed	XC9207A156M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
71F	ej	XC6111A246MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71G	-	RP101N201D	LVR-IC	LDO, LN, 2.0V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71H	-	RP101N251D	LVR-IC	LDO, LN, 2.5V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71H	ec	XC6111A217MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71H	ed	XC9207A166M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
71H	ej	XC6111A247MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71J	-	RP101N261D	LVR-IC	LDO, LN, 2.6V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71K	-	RP101N271D	LVR-IC	LDO, LN, 2.7V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71K	ec	XC6111A218MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71K	ed	XC9207A176M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
71K	ej	XC6111A248MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71L	-	RP101N281D	LVR-IC	LDO, LN, 2.8V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71L	ec	XC6111A219MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71L	ed	XC9207A186M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
71L	ej	XC6111A249MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71M	-	RP101N281D5	LVR-IC	LDO, LN, 2.85V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71M	ec	XC6111A220MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
71M	ed	XC9207A196M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
71M	ej	XC6111A250MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71N	-	RP101N291D	LVR-IC	LDO, LN, 2.9V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71N	ec	XC6111A221MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71P	-	RP101N301D	LVR-IC	LDO, LN, 3.0V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71P	ec	XC6111A222MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71Q	-	RP101N311D	LVR-IC	LDO, LN, 3.1V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71R	-	RP101N331D	LVR-IC	LDO, LN, 3.3V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71R	ec	XC6111A223MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71S	-	RP101N211D	LVR-IC	LDO, LN, 2.1V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71S	ec	XC6111A224MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71T	-	RP101N231D	LVR-IC	LDO, LN, 2.3V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71T	ec	XC6111A225MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71U	-	RP101N241D	LVR-IC	LDO, LN, 2.4V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71U	ec	XC6111A226MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71V	-	RP101N321D	LVR-IC	LDO, LN, 3.2V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71V	ec	XC6111A227MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71W	-	RP101N221D	LVR-IC	LDO, LN, 2.2V±0.8%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
71X	ec	XC6111A228MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71Y	ec	XC6111A229MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71Y	ed	XC9207A1L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
71Z	ec	XC6111A230MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
71Z	ed	XC9207A1L3M	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
72	-	RN5RF22BA	LVR-IC	LRip, +CE, 2.2V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
72	-	RN5RZ22BA	LVR-IC	LDO, LN, 2.2V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
720	-	R1124N201A	LVR-IC	LDO, Low noise, 2V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
720	-	R1191N120D	LVR-IC	LDO, 12.0V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
720	ed	XC9207A203M	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
720	eh	XC9111E201MR	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
720	ej	XC6111A331MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
721	-	R1124N211A	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
721	-	R1191N121D	LVR-IC	LDO, 12.1V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
721	ed	XC9207A213M	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
721	eh	XC9111E211MR	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
721	ej	XC6111A332MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
722	-	R1124N221A	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
722	-	R1191N122D	LVR-IC	LDO, 12.2V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
722	ed	XC9207A223M	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
722	eh	XC9111E221MR	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
722	ej	XC6111A333MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
723	-	R1124N231A	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
723	-	R1191N123D	LVR-IC	LDO, 12.3V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
723	ed	XC9207A233M	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
723	eh	XC9111E231MR	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
723	ej	XC6111A334MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
724	-	R1124N241A	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
724	-	R1191N124D	LVR-IC	LDO, 12.4V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
724	ed	XC9207A243M	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
724	eh	XC9111E241MR	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
724	ej	XC6111A335MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
725	-	R1124N251A	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
725	-	R1191N125D	LVR-IC	LDO, 12.5V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
725	ed	XC9207A253M	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
725	eh	XC9111E251MR	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
725	ej	XC6111A336MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
726	-	R1124N261A	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
726	-	R1191N126D	LVR-IC	LDO, 12.6V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
726	ed	XC9207A263M	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
726	eh	XC9111E261MR	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
726	ej	XC6111A337MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
727	-	R1124N271A	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
727	-	R1191N127D	LVR-IC	LDO, 12.7V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
727	ed	XC9207A273M	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
727	eh	XC9111E271MR	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
727	ej	XC6111A338MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
728	-	R1124N281A	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
728	-	R1191N128D	LVR-IC	LDO, 12.8V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
728	ed	XC9207A283M	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
728	eh	XC9111E281MR	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
728	ej	XC6111A339MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
729	-	R1124N291A	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
729	-	R1191N129D	LVR-IC	LDO, 12.9V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
729	ed	XC9207A293M	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
729	eh	XC9111E291MR	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
729	ej	XC6111A340MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72A	ed	XC9207A206M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
72A	ej	XC6111A341MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72B	ed	XC9207A216M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
72B	ej	XC6111A342MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72C	ed	XC9207A226M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
72C	ej	XC6111A343MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72D	ed	XC9207A236M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
72D	ej	XC6111A344MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72E	ed	XC9207A246M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
72E	ej	XC6111A345MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72F	ec	XC6111A316MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72F	ed	XC9207A256M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
72F	ej	XC6111A346MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72H	ec	XC6111A317MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72H	ed	XC9207A266M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
72H	ej	XC6111A347MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72K	ec	XC6111A318MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72K	ed	XC9207A276M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
72K	ej	XC6111A348MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72L	ec	XC6111A319MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72L	ed	XC9207A286M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
72L	ej	XC6111A349MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72M	ec	XC6111A320MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72M	ed	XC9207A296M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
72M	ej	XC6111A350MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72N	ec	XC6111A321MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72P	ec	XC6111A322MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72R	ec	XC6111A323MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72S	ec	XC6111A324MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72T	ec	XC6111A325MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72U	ec	XC6111A326MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72V	ec	XC6111A327MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72X	ec	XC6111A328MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72Y	ec	XC6111A329MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72Y	ed	XC9207A2L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
72Z	ec	XC6111A330MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
72Z	ed	XC9207A2L3M	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
73	-	RN5RF23BA	LVR-IC	LRip, +CE, 2.3V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
73	-	RN5RZ23BA	LVR-IC	LDO, LN, 2.3V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
730	-	R1124N301A	LVR-IC	LDO, Low noise, 3V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
730	-	R1191N130D	LVR-IC	LDO, 13.0V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
730	ed	XC9207A303M	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
730	eh	XC9111E301MR	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
730	ej	XC6111A431MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
731	-	R1124N311A	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
731	-	R1191N131D	LVR-IC	LDO, 13.1V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
731	ed	XC9207A313M	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
731	eh	XC9111E311MR	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
731	ej	XC6111A432MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
732	-	R1124N321A	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
732	-	R1191N132D	LVR-IC	LDO, 13.2V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
732	ed	XC9207A323M	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
732	eh	XC9111E321MR	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
732	ej	XC6111A433MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
733	-	R1124N331A	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
733	-	R1191N133D	LVR-IC	LDO, 13.3V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
733	ed	XC9207A333M	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
733	eh	XC9111E331MR	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
733	ej	XC6111A434MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
734	-	R1124N341A	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
734	-	R1191N134D	LVR-IC	LDO, 13.4V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
734	ed	XC9207A343M	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
734	eh	XC9111E341MR	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
734	ej	XC6111A435MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
735	-	R1124N351A	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
735	-	R1191N135D	LVR-IC	LDO, 13.5V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
735	ed	XC9207A353M	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
735	eh	XC9111E351MR	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
735	ej	XC6111A436MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
736	-	R1124N361A	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
736	-	R1191N136D	LVR-IC	LDO, 13.6V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
736	ed	XC9207A363M	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
736	eh	XC9111E361MR	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
736	ej	XC6111A437MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
737	-	R1124N371A	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
737	-	R1191N137D	LVR-IC	LDO, 13.7V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
737	ed	XC9207A373M	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
737	eh	XC9111E371MR	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
737	ej	XC6111A438MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
738	-	R1124N381A	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
738	-	R1191N138D	LVR-IC	LDO, 13.8V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
738	ed	XC9207A383M	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
738	eh	XC9111E381MR	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
738	ej	XC6111A439MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
739	-	R1124N391A	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
739	-	R1191N139D	LVR-IC	LDO, 13.9V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
739	ed	XC9207A393M	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
739	eh	XC9111E391MR	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
739	ej	XC6111A440MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73A	ed	XC9207A306M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
73A	ej	XC6111A441MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73B	ed	XC9207A316M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
73B	ej	XC6111A442MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73C	ed	XC9207A326M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
73C	ej	XC6111A443MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73D	ed	XC9207A336M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
73D	ej	XC6111A444MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73E	ed	XC9207A346M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
73E	ej	XC6111A445MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73F	ec	XC6111A416MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73F	ed	XC9207A356M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
73F	ej	XC6111A446MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73H	ec	XC6111A417MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73H	ed	XC9207A366M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
73H	ej	XC6111A447MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73K	ec	XC6111A418MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73K	ed	XC9207A376M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
73K	ej	XC6111A448MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73L	ec	XC6111A419MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73L	ed	XC9207A386M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
73L	ej	XC6111A449MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73M	ec	XC6111A420MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73M	ed	XC9207A396M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
73M	ej	XC6111A450MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73N	ec	XC6111A421MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73P	ec	XC6111A422MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73R	ec	XC6111A423MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73S	ec	XC6111A424MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73T	ec	XC6111A425MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73U	ec	XC6111A426MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73V	ec	XC6111A427MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73X	ec	XC6111A428MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73Y	ec	XC6111A429MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
73Z	ec	XC6111A430MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74	-	RN5RF24BA	LVR-IC	LRip, +CE, 2.4V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
74	-	RN5RZ24BA	LVR-IC	LDO, LN, 2.4V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
740	-	R1124N401A	LVR-IC	LDO, Low noise, 4V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
740	-	R1191N140D	LVR-IC	LDO, 14.0V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
740	ed	XC9207A403M	DC-DC-IC	PWM/PFM step-down, 300kHz, 4.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
740	eh	XC9111E401MR	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
740	ej	XC6111A531MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
741	-	R1124N281A5	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
741	-	R1191N141D	LVR-IC	LDO, 14.1V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
741	eh	XC9111E411MR	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
741	ej	XC6111A532MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
742	-	R1191N142D	LVR-IC	LDO, 14.2V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
742	eh	XC9111E421MR	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
742	ej	XC6111A533MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
743	-	R1191N143D	LVR-IC	LDO, 14.3V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
743	eh	XC9111E431MR	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
743	ej	XC6111A534MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
744	-	R1191N144D	LVR-IC	LDO, 14.4V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
744	eh	XC9111E441MR	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
744	ej	XC6111A535MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
745	-	R1191N145D	LVR-IC	LDO, 14.5V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
745	eh	XC9111E451MR	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
745	ej	XC6111A536MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
746	-	R1191N146D	LVR-IC	LDO, 14.6V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
746	eh	XC9111E461MR	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
746	ej	XC6111A537MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
747	-	R1191N147D	LVR-IC	LDO, 14.7V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
747	eh	XC9111E471MR	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
747	ej	XC6111A538MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
748	-	R1191N148D	LVR-IC	LDO, 14.8V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
748	eh	XC9111E481MR	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
748	ej	XC6111A539MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
749	-	R1191N149D	LVR-IC	LDO, 14.9V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
749	eh	XC9111E491MR	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
749	ej	XC6111A540MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74A	ed	XC9207A406M	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
74A	ej	XC6111A541MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74B	ej	XC6111A542MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74C	ej	XC6111A543MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74D	ej	XC6111A544MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74E	ej	XC6111A545MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74F	ec	XC6111A516MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74F	ej	XC6111A546MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74H	ec	XC6111A517MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74H	ej	XC6111A547MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74K	ec	XC6111A518MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74K	ej	XC6111A548MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74L	ec	XC6111A519MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74L	ej	XC6111A549MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74M	ec	XC6111A520MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74M	ej	XC6111A550MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74N	ec	XC6111A521MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74P	ec	XC6111A522MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74R	ec	XC6111A523MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74S	ec	XC6111A524MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74T	ec	XC6111A525MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74U	ec	XC6111A526MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74V	ec	XC6111A527MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74X	ec	XC6111A528MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74Y	ec	XC6111A529MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
74Z	ec	XC6111A530MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75	-	RN5RF25BA	LVR-IC	LRip, +CE, 2.5V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
75	-	RN5RZ25BA	LVR-IC	LDO, LN, 2.5V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
750	-	R1191N150D	LVR-IC	LDO, 15.0V±1.5%, 300mA, +CE, ECO, CL	SOT-23-5	28ca	VR10	6g	Ric
750	eh	XC9111E501MR	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
750	ej	XC6111A631MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
751	eh	XC9111E511MR	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
751	ej	XC6111A632MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
752	eh	XC9111E521MR	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
752	ej	XC6111A633MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
753	eh	XC9111E531MR	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
753	ej	XC6111A634MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
754	eh	XC9111E541MR	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
754	ej	XC6111A635MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
755	eh	XC9111E551MR	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
755	ej	XC6111A636MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
756	eh	XC9111E561MR	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
756	ej	XC6111A637MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
757	eh	XC9111E571MR	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
757	ej	XC6111A638MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
758	eh	XC9111E581MR	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
758	ej	XC6111A639MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
759	eh	XC9111E591MR	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
759	ej	XC6111A640MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75A	ej	XC6111A641MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75B	ej	XC6111A642MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75C	ej	XC6111A643MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75D	ej	XC6111A644MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75E	ej	XC6111A645MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75F	ec	XC6111A616MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75F	ej	XC6111A646MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75H	ec	XC6111A617MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75H	ej	XC6111A647MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75K	ec	XC6111A618MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75K	ej	XC6111A648MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75L	ec	XC6111A619MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75L	ej	XC6111A649MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75M	ec	XC6111A620MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75M	ej	XC6111A650MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75N	ec	XC6111A621MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75P	ec	XC6111A622MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75R	ec	XC6111A623MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75S	ec	XC6111A624MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75T	ec	XC6111A625MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75U	ec	XC6111A626MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75V	ec	XC6111A627MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75X	ec	XC6111A628MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75Y	ec	XC6111A629MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
75Z	ec	XC6111A630MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
76	-	RN5RF26BA	LVR-IC	LRip, +CE, 2.6V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
76	-	RN5RZ26BA	LVR-IC	LDO, LN, 2.6V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
760	eh	XC9111E601MR	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
760	ej	XC6111B231MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
761	eh	XC9111E611MR	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
761	ej	XC6111B232MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
762	eh	XC9111E621MR	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
762	ej	XC6111B233MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
763	eh	XC9111E631MR	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
763	ej	XC6111B234MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
764	eh	XC9111E641MR	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
764	ej	XC6111B235MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
765	eh	XC9111E651MR	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
765	ej	XC6111B236MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
766	eh	XC9111E661MR	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
766	ej	XC6111B237MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
767	eh	XC9111E671MR	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
767	ej	XC6111B238MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
768	eh	XC9111E681MR	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
768	ej	XC6111B239MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
769	eh	XC9111E691MR	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
769	ej	XC6111B240MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76A	ej	XC6111B241MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76B	ej	XC6111B242MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76C	ej	XC6111B243MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76D	ej	XC6111B244MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76E	ej	XC6111B245MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76F	ec	XC6111B216MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76F	ej	XC6111B246MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76H	ec	XC6111B217MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76H	ej	XC6111B247MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76K	ec	XC6111B218MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76K	ej	XC6111B248MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76L	ec	XC6111B219MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76L	ej	XC6111B249MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76M	ec	XC6111B220MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76M	ej	XC6111B250MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76N	ec	XC6111B221MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76P	ec	XC6111B222MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76R	ec	XC6111B223MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76S	ec	XC6111B224MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76T	ec	XC6111B225MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
76U	ec	XC6111B226MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76V	ec	XC6111B227MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76X	ec	XC6111B228MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76Y	ec	XC6111B229MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
76Z	ec	XC6111B230MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77	-	RN5RF27BA	LVR-IC	LRip, +CE, 2.7V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
77	-	RN5RZ27BA	LVR-IC	LDO, LN, 2.7V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
770	eh	XC9111E701MR	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
770	ej	XC6111B331MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
771	ej	XC6111B332MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
772	ej	XC6111B333MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
773	ej	XC6111B334MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
774	ej	XC6111B335MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
775	ej	XC6111B336MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
776	ej	XC6111B337MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
777	ej	XC6111B338MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
778	ej	XC6111B339MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
779	ej	XC6111B340MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77A	ej	XC6111B341MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77B	ej	XC6111B342MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77C	ej	XC6111B343MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77D	ej	XC6111B344MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77E	ej	XC6111B345MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77F	ec	XC6111B316MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77F	ej	XC6111B346MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77H	ec	XC6111B317MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77H	ej	XC6111B347MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77K	ec	XC6111B318MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77K	ej	XC6111B348MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77L	ec	XC6111B319MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77L	ej	XC6111B349MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77M	ec	XC6111B320MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77M	ej	XC6111B350MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77N	ec	XC6111B321MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77P	ec	XC6111B322MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77R	ec	XC6111B323MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77S	ec	XC6111B324MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77T	ec	XC6111B325MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77U	ec	XC6111B326MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77V	ec	XC6111B327MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77X	ec	XC6111B328MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77Y	ec	XC6111B329MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
77Z	ec	XC6111B330MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78	-	RN5RF28BA	LVR-IC	LRip, +CE, 2.8V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
78	-	RN5RZ28BA	LVR-IC	LDO, LN, 2.8V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
780	ej	XC6111B431MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
781	ej	XC6111B432MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
782	ej	XC6111B433MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
783	ej	XC6111B434MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
784	ej	XC6111B435MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
785	ej	XC6111B436MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
786	ej	XC6111B437MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
787	ej	XC6111B438MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
788	ej	XC6111B439MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
789	ej	XC6111B440MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78A	ej	XC6111B441MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78B	ej	XC6111B442MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78C	ej	XC6111B443MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78D	ej	XC6111B444MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78E	ej	XC6111B445MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78F	ec	XC6111B416MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78F	ej	XC6111B446MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78H	ec	XC6111B417MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78H	ej	XC6111B447MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78K	ec	XC6111B418MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78K	ej	XC6111B448MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78L	ec	XC6111B419MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78L	ej	XC6111B449MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78M	ec	XC6111B420MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78M	ej	XC6111B450MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
78N	ec	XC6111B421MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78P	ec	XC6111B422MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78R	ec	XC6111B423MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78S	ec	XC6111B424MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78T	ec	XC6111B425MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78U	ec	XC6111B426MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78V	ec	XC6111B427MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78X	ec	XC6111B428MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78Y	ec	XC6111B429MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
78Z	ec	XC6111B430MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79	-	RN5RF29BA	LVR-IC	LRip, +CE, 2.9V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
79	-	RN5RZ29BA	LVR-IC	LDO, LN, 2.9V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
790	ej	XC6111B531MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
791	ej	XC6111B532MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
792	ej	XC6111B533MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
793	ej	XC6111B534MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
794	ej	XC6111B535MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
795	ej	XC6111B536MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
796	ej	XC6111B537MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
797	ej	XC6111B538MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
798	ej	XC6111B539MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
799	ej	XC6111B540MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79A	ej	XC6111B541MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79B	ej	XC6111B542MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79C	ej	XC6111B543MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79D	ej	XC6111B544MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79E	ej	XC6111B545MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79F	ec	XC6111B516MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79F	ej	XC6111B546MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79H	ec	XC6111B517MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79H	ej	XC6111B547MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79K	ec	XC6111B518MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79K	ej	XC6111B548MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79L	ec	XC6111B519MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79L	ej	XC6111B549MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79M	ec	XC6111B520MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79M	ej	XC6111B550MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79N	ec	XC6111B521MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79P	ec	XC6111B522MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79R	ec	XC6111B523MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79S	ec	XC6111B524MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79T	ec	XC6111B525MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79U	ec	XC6111B526MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79V	ec	XC6111B527MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79X	ec	XC6111B528MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79Y	ec	XC6111B529MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
79Z	ec	XC6111B530MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7A0	-	XC6207A312MR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7A0	ej	XC6111B631MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7A1	-	XC6207A322MR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7A1	ej	XC6111B632MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7A2	-	XC6207A332MR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7A2	ej	XC6111B633MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7A3	-	XC6207A342MR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7A3	ej	XC6111B634MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7A4	-	XC6207A352MR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7A4	ej	XC6111B635MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7A5	-	XC6207A362MR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7A5	ej	XC6111B636MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7A6	-	XC6207A372MR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7A6	ej	XC6111B637MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7A7	-	XC6207A382MR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7A7	ej	XC6111B638MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7A8	-	XC6207A392MR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7A8	-	XC9236F08CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7A8	ej	XC6111B639MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7A9	-	XC6207A402MR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7A9	-	XC9236F09CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7A9	ej	XC6111B640MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AA	-	XC6207A412MR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7AA	ej	XC6111B641MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AB	-	XC6207A122MR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AB	ej	XC6111B642MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AB	es	XC6207A422MR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AC	-	XC6207A132MR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AC	ej	XC6111B643MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AC	es	XC6207A432MR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AD	-	XC6207A142MR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AD	ej	XC6111B644MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AD	es	XC6207A442MR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AE	-	XC6207A152MR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AE	ej	XC6111B645MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AE	es	XC6207A452MR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AF	-	XC6207A162MR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AF	ec	XC6111B616MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AF	ej	XC6111B646MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AF	es	XC6207A462MR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AH	-	XC6207A172MR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AH	ec	XC6111B617MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AH	ej	XC6111B647MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AH	es	XC6207A472MR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AK	-	XC6207A182MR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AK	ec	XC6111B618MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AK	ej	XC6111B648MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AK	es	XC6207A482MR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AL	-	XC6207A192MR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AL	-	XC9236F0LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7AL	ec	XC6111B619MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AL	ej	XC6111B649MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AL	es	XC6207A492MR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AM	-	XC6207A202MR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AM	-	XC9236F0MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7AM	ec	XC6111B620MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AM	ed	XC9207A09CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7AM	ej	XC6111B650MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AM	es	XC6207A502MR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AN	-	XC6207A212MR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AN	ec	XC6111B621MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AP	-	XC6207A222MR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AP	ec	XC6111B622MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AR	-	XC6207A232MR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AR	ec	XC6111B623MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AS	-	XC6207A242MR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AS	ec	XC6111B624MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AT	-	XC6207A252MR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AT	ec	XC6111B625MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AU	-	XC6207A262MR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AU	ec	XC6111B626MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AV	-	XC6207A272MR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AV	ec	XC6111B627MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AX	-	XC6207A282MR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AX	ec	XC6111B628MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AY	-	XC6207A292MR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AY	ec	XC6111B629MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7AZ	-	XC6207A302MR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7AZ	ec	XC6111B630MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
7B	-	R3111N171A	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
7B	-	RN5RL27AA	LVR-IC	2.7V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
7B	eu	RN5VD17CA	Vdet-IC	1.7V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
7B0	-	XC6207B312MR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7B0	-	XC9236F10CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7B0	ej	XC6111C231MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7B1	-	XC6207B322MR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7B1	-	XC9236F11CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7B1	ej	XC6111C232MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7B2	-	XC6207B332MR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7B2	-	XC9236F12CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7B2	ej	XC6111C233MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7B3	-	XC6207B342MR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7B3	-	XC9236F13CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7B3	ej	XC6111C234MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7B4	-	XC6207B352MR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7B4	-	XC9236F14CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7B4	ej	XC6111C235MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7B5	-	XC6207B362MR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7B5	-	XC9236F15CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7B5	ej	XC6111C236MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7B6	-	XC6207B372MR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7B6	-	XC9236F16CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7B6	ej	XC6111C237MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7B7	-	XC6207B382MR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7B7	-	XC9236F17CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7B7	ej	XC6111C238MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7B8	-	XC6207B392MR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7B8	-	XC9236F18CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7B8	ej	XC6111C239MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7B9	-	XC6207B402MR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7B9	-	XC9236F19CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7B9	ej	XC6111C240MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BA	-	XC6207B412MR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BA	-	XC9236F1ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7BA	ed	XC9207A10CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7BA	ej	XC6111C241MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BB	-	XC6207B122MR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BB	-	XC9236F1BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7BB	ed	XC9207A11CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7BB	ej	XC6111C242MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BB	es	XC6207B422MR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BC	-	XC6207B132MR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BC	-	XC9236F1CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7BC	ed	XC9207A12CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7BC	ej	XC6111C243MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BC	es	XC6207B432MR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BD	-	XC6207B142MR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BD	-	XC9236F1DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7BD	ed	XC9207A13CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7BD	ej	XC6111C244MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BD	es	XC6207B442MR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BE	-	XC6207B152MR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BE	-	XC9236F1ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7BE	ed	XC9207A14CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7BE	ej	XC6111C245MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BE	es	XC6207B452MR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BF	-	XC6207B162MR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BF	-	XC9236F1FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7BF	ec	XC6111C216MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BF	ed	XC9207A15CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7BF	ej	XC6111C246MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BF	es	XC6207B462MR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BH	-	XC6207B172MR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BH	-	XC9236F1HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7BH	ec	XC6111C217MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BH	ed	XC9207A16CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7BH	ej	XC6111C247MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BH	es	XC6207B472MR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BK	-	XC6207B182MR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BK	-	XC9236F1KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7BK	ec	XC6111C218MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BK	ed	XC9207A17CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7BK	ej	XC6111C248MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BK	es	XC6207B482MR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BL	-	XC6207B192MR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BL	-	XC9236F1LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7BL	ec	XC6111C219MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BL	ed	XC9207A18CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7BL	ej	XC6111C249MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BL	es	XC6207B492MR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BM	-	XC6207B202MR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BM	-	XC9236F1MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7BM	ec	XC6111C220MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7BM	ed	XC9207A19CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7BM	ej	XC6111C250MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BM	es	XC6207B502MR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BN	-	XC6207B212MR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BN	ec	XC6111C221MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BP	-	XC6207B222MR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BP	ec	XC6111C222MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BR	-	XC6207B232MR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BR	ec	XC6111C223MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BS	-	XC6207B242MR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BS	ec	XC6111C224MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BT	-	XC6207B252MR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BT	ec	XC6111C225MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BU	-	XC6207B262MR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BU	ec	XC6111C226MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BV	-	XC6207B272MR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BV	ec	XC6111C227MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BX	-	XC6207B282MR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BX	ec	XC6111C228MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BY	-	XC6207B292MR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BY	ec	XC6111C229MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7BY	ed	XC9207A1LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7BZ	-	XC6207B302MR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7BZ	ec	XC6111C230MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7C	-	R3111N271A	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
7C	-	RN5RL37AA	LVR-IC	3.7V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
7C	eu	RN5VD27CA	Vdet-IC	2.7V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
7C0	-	XC9236F20CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7C0	ej	XC6111C331MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7C1	-	XC9236F21CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7C1	ej	XC6111C332MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7C2	-	XC9236F22CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7C2	ej	XC6111C333MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7C3	-	XC9236F23CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7C3	ej	XC6111C334MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7C4	-	XC9236F24CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7C4	ej	XC6111C335MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7C5	-	XC9236F25CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7C5	ej	XC6111C336MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7C6	-	XC9236F26CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7C6	ej	XC6111C337MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7C7	-	XC9236F27CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7C7	ej	XC6111C338MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7C8	-	XC9236F28CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7C8	ej	XC6111C339MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7C9	-	XC9236F29CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7C9	ej	XC6111C340MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CA	-	XC9236F2ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7CA	ed	XC9207A20CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7CA	ej	XC6111C341MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CB	-	XC9236F2BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7CB	ed	XC9207A21CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7CB	ej	XC6111C342MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CC	-	XC9236F2CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7CC	ed	XC9207A22CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7CC	ej	XC6111C343MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CD	-	XC9236F2DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7CD	ed	XC9207A23CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7CD	ej	XC6111C344MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CE	-	XC9236F2ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7CE	ed	XC9207A24CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7CE	ej	XC6111C345MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CF	-	XC9236F2FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7CF	ec	XC6111C316MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CF	ed	XC9207A25CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7CF	ej	XC6111C346MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CH	-	XC9236F2HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7CH	ec	XC6111C317MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CH	ed	XC9207A26CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7CH	ej	XC6111C347MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7CK	-	XC9236F2KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7CK	ec	XC6111C318MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CK	ed	XC9207A27CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7CK	ej	XC6111C348MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CL	-	XC9236F2LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7CL	ec	XC6111C319MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CL	ed	XC9207A28CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7CL	ej	XC6111C349MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CM	-	XC9236F2MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7CM	ec	XC6111C320MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CM	ed	XC9207A29CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7CM	ej	XC6111C350MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CN	ec	XC6111C321MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CP	ec	XC6111C322MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CR	ec	XC6111C323MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CS	ec	XC6111C324MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CT	ec	XC6111C325MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CU	ec	XC6111C326MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CV	ec	XC6111C327MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CX	ec	XC6111C328MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CY	ec	XC6111C329MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7CY	ed	XC9207A2LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7CZ	ec	XC6111C330MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7D	-	R3111N371A	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
7D	-	RN5RL47AA	LVR-IC	4.7V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
7D	eu	RN5VD37CA	Vdet-IC	3.7V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
7D0	-	XC9236F30CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7D0	ej	XC6111C431MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7D1	-	XC9236F31CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7D1	ej	XC6111C432MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7D2	-	XC9236F32CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7D2	ej	XC6111C433MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7D3	-	XC9236F33CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7D3	ej	XC6111C434MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7D4	-	XC9236F34CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7D4	ej	XC6111C435MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7D5	-	XC9236F35CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7D5	ej	XC6111C436MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7D6	-	XC9236F36CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7D6	ej	XC6111C437MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7D7	-	XC9236F37CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7D7	ej	XC6111C438MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7D8	-	XC9236F38CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7D8	ej	XC6111C439MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7D9	-	XC9236F39CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7D9	ej	XC6111C440MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Da	-	FT532Da	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
7DA	-	XC9236F3ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7DA	ed	XC9207A30CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7DA	ej	XC6111C441MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Db	-	FT532Db	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
7DB	-	XC9236F3BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7DB	ed	XC9207A31CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7DB	ej	XC6111C442MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Dc	-	FT532Dc	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
7DC	-	XC9236F3CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7DC	ed	XC9207A32CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7DC	ej	XC6111C443MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Dd	-	FT532Dd	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
7DD	-	XC9236F3DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7DD	ed	XC9207A33CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7DD	ej	XC6111C444MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7De	-	FT532De	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
7DE	-	XC9236F3ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7DE	ed	XC9207A34CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7DE	ej	XC6111C445MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Df	-	FT532Df	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
7DF	-	XC9236F3FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7DF	ec	XC6111C416MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DF	ed	XC9207A35CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7DF	ej	XC6111C446MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DH	-	XC9236F3HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7DH	ec	XC6111C417MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DH	ed	XC9207A36CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7DH	ej	XC6111C447MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DK	-	XC9236F3KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7DK	ec	XC6111C418MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DK	ed	XC9207A37CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7DK	ej	XC6111C448MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DL	-	XC9236F3LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7DL	ec	XC6111C419MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DL	ed	XC9207A38CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7DL	ej	XC6111C449MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DM	-	XC9236F3MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7DM	ec	XC6111C420MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DM	ed	XC9207A39CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7DM	ej	XC6111C450MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DN	ec	XC6111C421MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DP	ec	XC6111C422MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DR	ec	XC6111C423MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DS	ec	XC6111C424MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DT	ec	XC6111C425MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DU	ec	XC6111C426MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DV	ec	XC6111C427MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DX	ec	XC6111C428MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DY	ec	XC6111C429MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7DZ	ec	XC6111C430MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7E	-	R3111N471A	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
7E	-	RN5RL57AA	LVR-IC	5.7V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
7E	eu	RN5VD47CA	Vdet-IC	4.7V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
7E0	-	XC9236F40CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7E0	ej	XC6111C531MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7E1	ej	XC6111C532MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7E2	ej	XC6111C533MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7E3	ej	XC6111C534MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7E4	ej	XC6111C535MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7E5	ej	XC6111C536MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7E6	ej	XC6111C537MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7E7	ej	XC6111C538MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7E8	ej	XC6111C539MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7E9	ej	XC6111C540MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Ea	-	FT532Ea	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
7EA	ed	XC9207A40CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
7EA	ej	XC6111C541MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Eb	-	FT532Eb	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
7EB	ej	XC6111C542MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Ec	-	FT532Ec	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
7EC	ej	XC6111C543MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Ed	-	FT532Ed	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
7ED	ej	XC6111C544MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Ee	-	FT532Ee	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
7EE	ej	XC6111C545MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Ef	-	FT532Ef	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
7EF	ec	XC6111C516MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7EF	ej	XC6111C546MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7EH	ec	XC6111C517MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7EH	ej	XC6111C547MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7EK	ec	XC6111C518MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7EK	ej	XC6111C548MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7EL	ec	XC6111C519MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7EL	ej	XC6111C549MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7EM	ec	XC6111C520MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7EM	ej	XC6111C550MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7EN	ec	XC6111C521MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7EP	ec	XC6111C522MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7ER	ec	XC6111C523MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7ES	ec	XC6111C524MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7ET	ec	XC6111C525MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7EU	ec	XC6111C526MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7EV	ec	XC6111C527MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7EX	ec	XC6111C528MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7EY	ec	XC6111C529MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7EZ	ec	XC6111C530MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7F	-	R3111N571A	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
7F	eu	RN5VD57CA	Vdet-IC	5.7V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
7F0	ej	XC6111C631MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7F1	ej	XC6111C632MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7F2	ej	XC6111C633MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7F3	ej	XC6111C634MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7F4	ej	XC6111C635MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7F5	ej	XC6111C636MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7F6	ej	XC6111C637MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7F7	ej	XC6111C638MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7F8	-	XC9236F08DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7F8	ej	XC6111C639MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7F9	-	XC9236F09DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7F9	ej	XC6111C640MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Fa	-	FT532Fa	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
7FA	ej	XC6111C641MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Fb	-	FT532Fb	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
7FB	ej	XC6111C642MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Fc	-	FT532Fc	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
7FC	ej	XC6111C643MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Fd	-	FT532Fd	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
7FD	ej	XC6111C644MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Fe	-	FT532Fe	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
7FE	ej	XC6111C645MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Ff	-	FT532Ff	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
7FF	ec	XC6111C616MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FF	ej	XC6111C646MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FH	ec	XC6111C617MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FH	ej	XC6111C647MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FK	ec	XC6111C618MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FK	ej	XC6111C648MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FL	-	XC9236F0LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7FL	ec	XC6111C619MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FL	ej	XC6111C649MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FM	-	XC9236F0MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7FM	ec	XC6111C620MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FM	ej	XC6111C650MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FN	ec	XC6111C621MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FP	ec	XC6111C622MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FR	ec	XC6111C623MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FS	ec	XC6111C624MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FT	ec	XC6111C625MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FU	ec	XC6111C626MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FV	ec	XC6111C627MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FX	ec	XC6111C628MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FY	ec	XC6111C629MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7FZ	ec	XC6111C630MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
7Ga	-	FT532Ga	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
7Gb	-	FT532Gb	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
7Gc	-	FT532Gc	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
7Gd	-	FT532Gd	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
7Ge	-	FT532Ge	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
7Gf	-	FT532Gf	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
7H0	-	XC9236F10DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7H0	ej	XC6111D331MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7H1	-	XC9236F11DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7H1	ej	XC6111D332MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7H2	-	XC9236F12DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7H2	ej	XC6111D333MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7H3	-	XC9236F13DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7H3	ej	XC6111D334MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7H4	-	XC9236F14DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7H4	ej	XC6111D335MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7H5	-	XC9236F15DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7H5	ej	XC6111D336MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7H6	-	XC9236F16DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7H6	ej	XC6111D337MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7H7	-	XC9236F17DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7H7	ej	XC6111D338MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7H8	-	XC9236F18DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7H8	ej	XC6111D339MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7H9	-	XC9236F19DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7H9	ej	XC6111D340MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7Ha	-	FT532Ha	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
7HA	-	XC9236F1ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7HA	ej	XC6111D341MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7Hb	-	FT532Hb	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
7HB	-	XC9236F1BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7HB	ej	XC6111D342MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7Hc	-	FT532Hc	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
7HC	-	XC9236F1CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7HC	ej	XC6111D343MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7Hd	-	FT532Hd	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
7HD	-	XC9236F1DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7HD	ej	XC6111D344MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7He	-	FT532He	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
7HE	-	XC9236F1EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7HE	ej	XC6111D345MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7Hf	-	FT532Hf	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
7HF	-	XC9236F1FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7HF	ec	XC6111D316MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HF	ej	XC6111D346MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HH	-	XC9236F1HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7HH	ec	XC6111D317MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HH	ej	XC6111D347MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HK	-	XC9236F1KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7HK	ec	XC6111D318MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HK	ej	XC6111D348MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HL	-	XC9236F1LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7HL	ec	XC6111D319MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HL	ej	XC6111D349MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HM	-	XC9236F1MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7HM	ec	XC6111D320MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HM	ej	XC6111D350MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HN	ec	XC6111D321MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HP	ec	XC6111D322MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HR	ec	XC6111D323MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HS	ec	XC6111D324MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HT	ec	XC6111D325MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HU	ec	XC6111D326MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HV	ec	XC6111D327MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HX	ec	XC6111D328MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HY	ec	XC6111D329MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7HZ	ec	XC6111D330MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7Ia	-	FT532Ia	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
7Ib	-	FT532Ib	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
7Ic	-	FT532Ic	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
7Id	-	FT532Id	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
7Ie	-	FT532Ie	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
7If	-	FT532If	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
7J	-	R3111N171C	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
7Ja	-	FT532Ja	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
7Jb	-	FT532Jb	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
7Jc	-	FT532Jc	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
7Jd	-	FT532Jd	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
7Je	-	FT532Je	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
7Jf	-	FT532Jf	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
7K	-	R3111N271C	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
7K0	-	XC9236F20DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7K0	ej	XC6111D431MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7K1	-	XC9236F21DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7K1	ej	XC6111D432MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7K2	-	XC9236F22DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7K2	ej	XC6111D433MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7K3	-	XC9236F23DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7K3	ej	XC6111D434MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7K4	-	XC9236F24DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7K4	ej	XC6111D435MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7K5	-	XC9236F25DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7K5	ej	XC6111D436MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7K6	-	XC9236F26DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7K6	ej	XC6111D437MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7K7	-	XC9236F27DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7K7	ej	XC6111D438MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7K8	-	XC9236F28DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7K8	ej	XC6111D439MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7K9	-	XC9236F29DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7K9	ej	XC6111D440MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7Ka	-	FT532Ka	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	SOT-23-5	28cx	VR4	6g	Fmd
7KA	-	XC9236F2ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7KA	ej	XC6111D441MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7Kb	-	FT532Kb	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	SOT-23-5	28vc	VR4	6g	Fmd
7KB	-	XC9236F2BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7KB	ej	XC6111D442MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7Kc	-	FT532Kc	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	SOT-23-5	28xm	VR4	6g	Fmd
7KC	-	XC9236F2CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7KC	ej	XC6111D443MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7Kd	-	FT532Kd	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	SC-70-5	28cx	VR4	6g	Fmd
7KD	-	XC9236F2DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7KD	ej	XC6111D444MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7Ke	-	FT532Ke	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	SC-70-5	28vc	VR4	6g	Fmd
7KE	-	XC9236F2EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7KE	ej	XC6111D445MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7Kf	-	FT532Kf	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	SC-70-5	28xm	VR4	6g	Fmd
7KF	-	XC9236F2FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7KF	ec	XC6111D416MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KF	ej	XC6111D446MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KH	-	XC9236F2HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7KH	ec	XC6111D417MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KH	ej	XC6111D447MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KK	-	XC9236F2KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7KK	ec	XC6111D418MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KK	ej	XC6111D448MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KL	-	XC9236F2LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7KL	ec	XC6111D419MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KL	ej	XC6111D449MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KM	-	XC9236F2MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7KM	ec	XC6111D420MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KM	ej	XC6111D450MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KN	ec	XC6111D421MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KP	ec	XC6111D422MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KR	ec	XC6111D423MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KS	ec	XC6111D424MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KT	ec	XC6111D425MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KU	ec	XC6111D426MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KV	ec	XC6111D427MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KX	ec	XC6111D428MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KY	ec	XC6111D429MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7KZ	ec	XC6111D430MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7L	-	R3111N371C	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
7L0	-	XC9236F30DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7L0	ej	XC6111D531MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7L1	-	XC9236F31DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7L1	ej	XC6111D532MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7L2	-	XC9236F32DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7L2	ej	XC6111D533MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7L3	-	XC9236F33DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7L3	ej	XC6111D534MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7L4	-	XC9236F34DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7L4	ej	XC6111D535MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7L5	-	XC9236F35DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7L5	ej	XC6111D536MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7L6	-	XC9236F36DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7L6	ej	XC6111D537MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7L7	-	XC9236F37DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7L7	ej	XC6111D538MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7L8	-	XC9236F38DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7L8	ej	XC6111D539MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7L9	-	XC9236F39DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7L9	ej	XC6111D540MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LA	-	XC9236F3ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7LA	ej	XC6111D541MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LB	-	XC9236F3BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7LB	ej	XC6111D542MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LC	-	XC9236F3CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7LC	ej	XC6111D543MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LD	-	XC9236F3DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7LD	ej	XC6111D544MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LE	-	XC9236F3EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7LE	ej	XC6111D545MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LF	-	XC9236F3FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7LF	ec	XC6111D516MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LF	ej	XC6111D546MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LH	-	XC9236F3HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7LH	ec	XC6111D517MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LH	ej	XC6111D547MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LK	-	XC9236F3KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7LK	ec	XC6111D518MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LK	ej	XC6111D548MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LL	-	XC9236F3LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7LL	ec	XC6111D519MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LL	ej	XC6111D549MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LM	-	XC9236F3MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7LM	ec	XC6111D520MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LM	ej	XC6111D550MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LN	ec	XC6111D521MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LP	ec	XC6111D522MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LR	ec	XC6111D523MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LS	ec	XC6111D524MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LT	ec	XC6111D525MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LU	ec	XC6111D526MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LV	ec	XC6111D527MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LX	ec	XC6111D528MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LY	ec	XC6111D529MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7LZ	ec	XC6111D530MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7M	-	R3111N471C	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
7M0	-	XC9236F40DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
7M0	ej	XC6111D631MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7M1	ej	XC6111D632MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7M2	ej	XC6111D633MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7M3	ej	XC6111D634MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7M4	ej	XC6111D635MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7M5	ej	XC6111D636MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7M6	ej	XC6111D637MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7M7	ej	XC6111D638MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7M8	ej	XC6111D639MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7M9	ej	XC6111D640MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MA	ej	XC6111D641MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MB	ej	XC6111D642MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MC	ej	XC6111D643MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MD	ej	XC6111D644MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7ME	ej	XC6111D645MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MF	ec	XC6111D616MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MF	ej	XC6111D646MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MH	ec	XC6111D617MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MH	ej	XC6111D647MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MK	ec	XC6111D618MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MK	ej	XC6111D648MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7ML	ec	XC6111D619MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7ML	ej	XC6111D649MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MM	ec	XC6111D620MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MM	ej	XC6111D650MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MN	ec	XC6111D621MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MP	ec	XC6111D622MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MR	ec	XC6111D623MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MS	ec	XC6111D624MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MT	ec	XC6111D625MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7MU	ec	XC6111D626MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MV	ec	XC6111D627MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MX	ec	XC6111D628MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MY	ec	XC6111D629MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7MZ	ec	XC6111D630MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
7N	-	R3111N571C	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
7N0	-	XC6207A31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7N1	-	XC6207A32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7N2	-	XC6207A33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7N3	-	XC6207A34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7N4	-	XC6207A35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7N5	-	XC6207A36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7N6	-	XC6207A37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7N7	-	XC6207A38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7N8	-	XC6207A39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7N9	-	XC6207A40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NA	-	XC6207A41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NB	-	XC6207A12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NB	es	XC6207A42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NC	-	XC6207A13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NC	es	XC6207A43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7ND	-	XC6207A14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7ND	es	XC6207A44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NE	-	XC6207A15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NE	es	XC6207A45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NF	-	XC6207A16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NF	es	XC6207A46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NH	-	XC6207A17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NH	es	XC6207A47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NK	-	XC6207A18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NK	es	XC6207A48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NL	-	XC6207A19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NL	es	XC6207A49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NM	-	XC6207A20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NN	-	XC6207A21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NP	-	XC6207A22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NR	-	XC6207A23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NS	-	XC6207A24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NT	-	XC6207A25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NU	-	XC6207A26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NV	-	XC6207A27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NX	-	XC6207A28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NY	-	XC6207A29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7NZ	-	XC6207A30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7P0	-	XC6207B31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7P0	ej	XC6111E431MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7P1	-	XC6207B32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7P1	ej	XC6111E432MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7P2	-	XC6207B33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7P2	ej	XC6111E433MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7P3	-	XC6207B34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7P3	ej	XC6111E434MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7P4	-	XC6207B35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7P4	ej	XC6111E435MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7P5	-	XC6207B36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7P5	ej	XC6111E436MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7P6	-	XC6207B37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7P6	ej	XC6111E437MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7P7	-	XC6207B38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7P7	ej	XC6111E438MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7P8	-	XC6207B39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7P8	ej	XC6111E439MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7P9	-	XC6207B40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7P9	ej	XC6111E440MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PA	-	XC6207B41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PA	ej	XC6111E441MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PB	-	XC6207B12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PB	ej	XC6111E442MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PB	es	XC6207B42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PC	-	XC6207B13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7PC	ej	XC6111E443MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PC	es	XC6207B43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PD	-	XC6207B14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PD	ej	XC6111E444MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PD	es	XC6207B44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PE	-	XC6207B15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PE	ej	XC6111E445MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PE	es	XC6207B45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PF	-	XC6207B16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PF	ec	XC6111E416MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PF	ej	XC6111E446MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PF	es	XC6207B46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PH	-	XC6207B17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PH	ec	XC6111E417MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PH	ej	XC6111E447MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PH	es	XC6207B47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PK	-	XC6207B18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PK	ec	XC6111E418MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PK	ej	XC6111E448MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PK	es	XC6207B48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PL	-	XC6207B19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PL	ec	XC6111E419MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PL	ej	XC6111E449MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PL	es	XC6207B49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PM	-	XC6207B20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PM	ec	XC6111E420MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PM	ej	XC6111E450MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PN	-	XC6207B21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PN	ec	XC6111E421MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PP	-	XC6207B22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PP	ec	XC6111E422MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PR	-	XC6207B23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PR	ec	XC6111E423MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PS	-	XC6207B24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PS	ec	XC6111E424MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PT	-	XC6207B25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PT	ec	XC6111E425MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PU	-	XC6207B26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PU	ec	XC6111E426MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PV	-	XC6207B27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PV	ec	XC6111E427MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PX	-	XC6207B28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PX	ec	XC6111E428MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PY	-	XC6207B29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PY	ec	XC6111E429MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7PZ	-	XC6207B30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, CL, Shutdown	SOT-25	28cu	VR4a	6g	Tor
7PZ	ec	XC6111E430MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7Q	-	R1210N271A	DC-DC-IC	PWM step-up, 2.7V, 35..100kHz	SOT-23-5	28sc	DC3	6g	Ric
7R0	ej	XC6111E531MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7R1	ej	XC6111E532MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7R2	ej	XC6111E533MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7R3	ej	XC6111E534MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7R4	ej	XC6111E535MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7R5	ej	XC6111E536MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7R6	ej	XC6111E537MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7R7	ej	XC6111E538MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7R8	ej	XC6111E539MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7R9	ej	XC6111E540MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RA	ej	XC6111E541MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RB	ej	XC6111E542MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RC	ej	XC6111E543MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RD	ej	XC6111E544MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RE	ej	XC6111E545MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RF	ec	XC6111E516MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RF	ej	XC6111E546MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RH	ec	XC6111E517MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RH	ej	XC6111E547MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RK	ec	XC6111E518MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RK	ej	XC6111E548MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RL	ec	XC6111E519MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7RL	ej	XC6111E549MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RM	ec	XC6111E520MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RM	ej	XC6111E550MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RN	ec	XC6111E521MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RP	ec	XC6111E522MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RR	ec	XC6111E523MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RS	ec	XC6111E524MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RT	ec	XC6111E525MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RU	ec	XC6111E526MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RV	ec	XC6111E527MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RX	ec	XC6111E528MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RY	ec	XC6111E529MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7RZ	ec	XC6111E530MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7S	-	RN5RF17AA	LVR-IC	LRip, -CE, 1.7V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
7S0	ej	XC6111E631MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7S00	-	NC7S00M5	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6a	F
7S02	-	NC7S02M5	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6a	F
7S04	-	NC7S04M5	CMOS-Log	Inverter	SOT-23-5	28	Log6	6a	F
7S08	-	NC7S08M5	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6a	F
7S1	ej	XC6111E632MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7S14	-	NC7S14M5	CMOS-Log	Inverting Schmitt-trigger	SOT-23-5	28	Log7	6a	F
7S2	ej	XC6111E633MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7S3	ej	XC6111E634MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7S32	-	NC7S32M5	CMOS-Log	2-input OR gate	SOT-23-5	28	Log4	6a	F
7S4	ej	XC6111E635MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7S5	ej	XC6111E636MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7S6	ej	XC6111E637MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7S7	ej	XC6111E638MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7S8	ej	XC6111E639MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7S86	-	NC7S86M5	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-23-5	28	Log5	6a	F
7S9	ej	XC6111E640MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SA	ej	XC6111E641MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SB	ej	XC6111E642MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SC	ej	XC6111E643MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SD	ej	XC6111E644MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SE	ej	XC6111E645MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SF	ec	XC6111E616MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SF	ej	XC6111E646MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SH	ec	XC6111E617MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SH	ej	XC6111E647MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SK	ec	XC6111E618MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SK	ej	XC6111E648MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SL	ec	XC6111E619MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SL	ej	XC6111E649MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SM	ec	XC6111E620MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SM	ej	XC6111E650MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SN	ec	XC6111E621MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SP	ec	XC6111E622MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SR	ec	XC6111E623MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SS	ec	XC6111E624MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7ST	ec	XC6111E625MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SU	ec	XC6111E626MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SU4	-	NC7SU04M5	CMOS-Log	Inverter	SOT-23-5	28	Log6	6a	F
7SV	ec	XC6111E627MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SX	ec	XC6111E628MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SY	ec	XC6111E629MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7SZ	ec	XC6111E630MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
7T	-	RN5RF17BA	LVR-IC	LRip, +CE, 1.7V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
7T0	ej	XC6111F531MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7T1	ej	XC6111F532MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7T2	ej	XC6111F533MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7T3	ej	XC6111F534MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7T4	ej	XC6111F535MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7T5	ej	XC6111F536MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7T6	ej	XC6111F537MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7T7	ej	XC6111F538MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7T8	ej	XC6111F539MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7T9	ej	XC6111F540MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TA	ej	XC6111F541MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TB	ej	XC6111F542MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7TC	ej	XC6111F543MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TD	ej	XC6111F544MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TE	ej	XC6111F545MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TF	ec	XC6111F516MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TF	ej	XC6111F546MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TH	ec	XC6111F517MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TH	ej	XC6111F547MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TK	ec	XC6111F518MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TK	ej	XC6111F548MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TL	ec	XC6111F519MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TL	ej	XC6111F549MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TM	ec	XC6111F520MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TM	ej	XC6111F550MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TN	ec	XC6111F521MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TP	ec	XC6111F522MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TR	ec	XC6111F523MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TS	ec	XC6111F524MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TT	ec	XC6111F525MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TU	ec	XC6111F526MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TV	ec	XC6111F527MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TX	ec	XC6111F528MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TY	ec	XC6111F529MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7TZ	ec	XC6111F530MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7U	-	R1210N271C	DC-DC-IC	PWM step-up, 2.7V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
7U0	ej	XC6111F631MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7U1	ej	XC6111F632MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7U2	ej	XC6111F633MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7U3	ej	XC6111F634MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7U4	ej	XC6111F635MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7U5	ej	XC6111F636MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7U6	ej	XC6111F637MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7U7	ej	XC6111F638MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7U8	ej	XC6111F639MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7U9	ej	XC6111F640MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UA	ej	XC6111F641MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UB	ej	XC6111F642MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UC	ej	XC6111F643MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UD	ej	XC6111F644MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UE	ej	XC6111F645MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UF	ec	XC6111F616MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UF	ej	XC6111F646MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UH	ec	XC6111F617MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UH	ej	XC6111F647MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UK	ec	XC6111F618MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UK	ej	XC6111F648MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UL	ec	XC6111F619MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UL	ej	XC6111F649MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UM	ec	XC6111F620MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UM	ej	XC6111F650MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UN	ec	XC6111F621MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UP	ec	XC6111F622MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UR	ec	XC6111F623MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7US	ec	XC6111F624MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UT	ec	XC6111F625MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UU	ec	XC6111F626MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UV	ec	XC6111F627MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UX	ec	XC6111F628MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UY	ec	XC6111F629MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7UZ	ec	XC6111F630MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
7V0	ej	XC6111H631MR	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7V1	ej	XC6111H632MR	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7V2	ej	XC6111H633MR	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7V3	ej	XC6111H634MR	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7V4	ej	XC6111H635MR	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7V5	ej	XC6111H636MR	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7V6	ej	XC6111H637MR	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7V7	ej	XC6111H638MR	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7V8	ej	XC6111H639MR	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7V9	ej	XC6111H640MR	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VA	ej	XC6111H641MR	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7VB	ej	XC6111H642MR	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VC	ej	XC6111H643MR	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VD	ej	XC6111H644MR	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VE	ej	XC6111H645MR	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VF	ec	XC6111H616MR	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VF	ej	XC6111H646MR	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VH	ec	XC6111H617MR	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VH	ej	XC6111H647MR	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VK	ec	XC6111H618MR	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VK	ej	XC6111H648MR	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VL	ec	XC6111H619MR	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VL	ej	XC6111H649MR	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VM	ec	XC6111H620MR	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VM	ej	XC6111H650MR	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VN	ec	XC6111H621MR	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VP	ec	XC6111H622MR	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VR	ec	XC6111H623MR	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VS	ec	XC6111H624MR	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VT	ec	XC6111H625MR	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VU	ec	XC6111H626MR	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VV	ec	XC6111H627MR	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VX	ec	XC6111H628MR	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VY	ec	XC6111H629MR	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7VZ	ec	XC6111H630MR	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
7W	-	R1210N371C	DC-DC-IC	PWM step-up, 3.7V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
7X	-	R1210N471C	DC-DC-IC	PWM step-up, 4.7V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
7Y	-	R1210N571C	DC-DC-IC	PWM step-up, 5.7V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
7Z	-	R1210N271D	DC-DC-IC	PWM step-up, 2.7V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
7Z00	-	NC7SZ00M5	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6a	F
7Z02	-	NC7SZ02M5	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6a	F
7Z08	-	NC7SZ08M5	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6a	F
8.2Z	-	MAZL082H	SA-Z-diode	Quad, 8.2V, 5mA, 200mW	SC-74A	28	D16	6a	Pan
8.2Z	-	MAZM082H	SA-Z-diode	Quad, 8.2V, 5mA, 150mW	SSMini5	30	D16	6a	Pan
8.2Z	-	MAZZ082H	SA-Z-diode	Quad, 8.2V, 5mA, 200mW	SMini5	30	D16	6a	Pan
80	-	RN5RF30BA	LVR-IC	LRip, +CE, 3V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
80	-	RN5RZ30BA	LVR-IC	LDO, LN, 3V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
800	ej	XC6112A131MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
801	ej	XC6112A132MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
802	ej	XC6112A133MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
803	ej	XC6112A134MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
804	ej	XC6112A135MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
805	ej	XC6112A136MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
806	ej	XC6112A137MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
807	ej	XC6112A138MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
808	ej	XC6112A139MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
809	ed	XC9208A093M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 0.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
809	ej	XC6112A140MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80A	-	RP103N121B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80A	ej	XC6112A141MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80B	-	RP103N131B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80B	ej	XC6112A142MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80C	-	RP103N151B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80C	ej	XC6112A143MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80D	-	RP103N181B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80D	ej	XC6112A144MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80E	-	RP103N181B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80E	ej	XC6112A145MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80F	-	RP103N191B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80F	ec	XC6112A116MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80F	ej	XC6112A146MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80G	-	RP103N201B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80H	-	RP103N251B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80H	ec	XC6112A117MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80H	ej	XC6112A147MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80J	-	RP103N261B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80K	-	RP103N271B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80K	ec	XC6112A118MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80K	ej	XC6112A148MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80L	-	RP103N281B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80L	ec	XC6112A119MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
80L	ej	XC6112A149MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80M	-	RP103N281B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80M	ec	XC6112A120MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80M	ed	XC9208A096M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 0.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
80M	ej	XC6112A150MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80N	-	RP103N291B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80N	ec	XC6112A121MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80P	-	RP103N301B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80P	ec	XC6112A122MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80Q	-	RP103N311B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80R	-	RP103N331B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80R	ec	XC6112A123MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80S	-	RP103N231B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80S	ec	XC6112A124MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80T	-	RP103N211B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80T	ec	XC6112A125MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80U	-	RP103N321B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80U	ec	XC6112A126MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80V	-	RP103N291B5	LVR-IC	LDO, 2.95V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80V	ec	XC6112A127MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80W	-	RP103N221B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80X	-	RP103N161B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80X	ec	XC6112A128MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80Y	-	RP103N141B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80Y	ec	XC6112A129MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
80Z	-	MCP1804T-3002I/OT	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28hw	VR4	6g	Mcc
80Z	-	RP103N171B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
80Z	ec	XC6112A130MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81	-	RN5RF31BA	LVR-IC	LRip, +CE, 3.1V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
81	-	RN5RZ31BA	LVR-IC	LDO, LN, 3.1V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
810	ed	XC9208A103M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 1.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
810	ej	XC6112A231MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
811	ed	XC9208A113M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 1.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
811	ej	XC6112A232MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
811J	-	SGM811-JXN5	Vdet-IC	4.0V±1.5%, -Reset ODO, -MR	SOT-23-5	28vd2	VD4	6a	Sgm
811L	-	SGM811-LXN5	Vdet-IC	4.63V±1.5%, -Reset ODO, -MR	SOT-23-5	28vd2	VD4	6a	Sgm
811M	-	SGM811-MXN5	Vdet-IC	4.38V±1.5%, -Reset ODO, -MR	SOT-23-5	28vd2	VD4	6a	Sgm
811R	-	SGM811-RXN5	Vdet-IC	2.63V±1.5%, -Reset ODO, -MR	SOT-23-5	28vd2	VD4	6a	Sgm
811S	-	SGM811-SXN5	Vdet-IC	2.93V±1.5%, -Reset ODO, -MR	SOT-23-5	28vd2	VD4	6a	Sgm
811T	-	SGM811-TXN5	Vdet-IC	3.08V±1.5%, -Reset ODO, -MR	SOT-23-5	28vd2	VD4	6a	Sgm
811Z	-	SGM811-ZXN5	Vdet-IC	2.32V±1.5%, -Reset ODO, -MR	SOT-23-5	28vd2	VD4	6a	Sgm
812	ed	XC9208A123M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 1.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
812	ej	XC6112A233MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
812J	-	SGM812-JXN5	Vdet-IC	4.0V±1.5%, +Reset ODO, -MR	SOT-23-5	28vd2	VD4	6a	Sgm
812L	-	SGM812-LXN5	Vdet-IC	4.63V±1.5%, +Reset ODO, -MR	SOT-23-5	28vd2	VD4	6a	Sgm
812M	-	SGM812-MXN5	Vdet-IC	4.38V±1.5%, +Reset ODO, -MR	SOT-23-5	28vd2	VD4	6a	Sgm
812R	-	SGM812-RXN5	Vdet-IC	2.63V±1.5%, +Reset ODO, -MR	SOT-23-5	28vd2	VD4	6a	Sgm
812S	-	SGM812-SXN5	Vdet-IC	2.93V±1.5%, +Reset ODO, -MR	SOT-23-5	28vd2	VD4	6a	Sgm
812T	-	SGM812-TXN5	Vdet-IC	3.08V±1.5%, +Reset ODO, -MR	SOT-23-5	28vd2	VD4	6a	Sgm
812Z	-	SGM812-ZXN5	Vdet-IC	2.32V±1.5%, +Reset ODO, -MR	SOT-23-5	28vd2	VD4	6a	Sgm
813	ed	XC9208A133M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 1.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
813	ej	XC6112A234MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
814	ed	XC9208A143M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 1.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
814	ej	XC6112A235MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
815	-	R1124N151B	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
815	ed	XC9208A153M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 1.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
815	eh	XC9111F151MR	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
815	ej	XC6112A236MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
816	-	R1124N161B	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
816	ed	XC9208A163M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 1.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
816	eh	XC9111F161MR	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
816	ej	XC6112A237MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
817	-	R1124N171B	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
817	ed	XC9208A173M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 1.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
817	eh	XC9111F171MR	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
817	ej	XC6112A238MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
818	-	R1124N181B	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
818	ed	XC9208A183M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 1.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
818	eh	XC9111F181MR	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
818	ej	XC6112A239MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
819	-	R1124N191B	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
819	ed	XC9208A193M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 1.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
819	eh	XC9111F191MR	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
819	ej	XC6112A240MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81A	-	RP103N121D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81A	ed	XC9208A106M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 1.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
81A	ej	XC6112A241MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81B	-	RP103N131D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81B	ed	XC9208A116M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 1.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
81B	ej	XC6112A242MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81C	-	RP103N151D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81C	ed	XC9208A126M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 1.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
81C	ej	XC6112A243MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81D	-	RP103N181D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81D	ed	XC9208A136M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 1.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
81D	ej	XC6112A244MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81E	-	RP103N181D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81E	ed	XC9208A146M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 1.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
81E	ej	XC6112A245MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81F	-	RP103N191D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81F	ec	XC6112A216MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81F	ed	XC9208A156M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 1.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
81F	ej	XC6112A246MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81G	-	RP103N201D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81H	-	RP103N251D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81H	ec	XC6112A217MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81H	ed	XC9208A166M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 1.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
81H	ej	XC6112A247MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81J	-	RP103N261D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81K	-	RP103N271D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81K	-	XC6701B18MR	LVR-IC	1.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
81K	ec	XC6112A218MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81K	ed	XC9208A176M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 1.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
81K	ej	XC6112A248MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81L	-	RP103N281D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81L	-	XC6701B19MR	LVR-IC	1.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
81L	ec	XC6112A219MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81L	ed	XC9208A186M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 1.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
81L	ej	XC6112A249MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81M	-	RP103N281D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81M	-	XC6701B20MR	LVR-IC	2.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
81M	ec	XC6112A220MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81M	ed	XC9208A196M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 1.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
81M	ej	XC6112A250MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81N	-	RP103N291D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81N	-	XC6701B21MR	LVR-IC	2.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
81N	ec	XC6112A221MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81P	-	RP103N301D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81P	-	XC6701B22MR	LVR-IC	2.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
81P	ec	XC6112A222MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81Q	-	RP103N311D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81R	-	RP103N331D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81R	-	XC6701B23MR	LVR-IC	2.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
81R	ec	XC6112A223MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81S	-	RP103N231D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81S	-	XC6701B24MR	LVR-IC	2.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
81S	ec	XC6112A224MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81T	-	RP103N211D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81T	-	XC6701B25MR	LVR-IC	2.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
81T	ec	XC6112A225MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81U	-	RP103N321D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81U	-	XC6701B26MR	LVR-IC	2.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
81U	ec	XC6112A226MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81V	-	RP103N291D5	LVR-IC	LDO, 2.95V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81V	-	XC6701B27MR	LVR-IC	2.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
81V	ec	XC6112A227MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81W	-	RP103N221D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81X	-	RP103N161D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81X	-	XC6701B28MR	LVR-IC	2.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
81X	ec	XC6112A228MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
81Y	-	RP103N141D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81Y	-	XC6701B29MR	LVR-IC	2.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
81Y	ec	XC6112A229MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81Y	ed	XC9208A1L6M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 1.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
81Z	-	RP103N171D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
81Z	-	XC6701B30MR	LVR-IC	3.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
81Z	ec	XC6112A230MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
81Z	ed	XC9208A1L3M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 1.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
82	-	RN5RF32BA	LVR-IC	LRip, +CE, 3.2V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
82	-	RN5RZ32BA	LVR-IC	LDO, LN, 3.2V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
820	-	R1124N201B	LVR-IC	LDO, Low noise, 2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
820	-	XC6701B31MR	LVR-IC	3.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
820	ed	XC9208A203M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 2.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
820	eh	XC9111F201MR	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
820	ej	XC6112A331MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
821	-	R1124N211B	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
821	-	XC6701B32MR	LVR-IC	3.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
821	ed	XC9208A213M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 2.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
821	eh	XC9111F211MR	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
821	ej	XC6112A332MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
822	-	R1124N221B	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
822	-	XC6701B33MR	LVR-IC	3.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
822	ed	XC9208A223M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 2.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
822	eh	XC9111F221MR	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
822	ej	XC6112A333MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
823	-	R1124N231B	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
823	-	XC6701B34MR	LVR-IC	3.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
823	ed	XC9208A233M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 2.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
823	eh	XC9111F231MR	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
823	ej	XC6112A334MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
824	-	R1124N241B	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
824	-	XC6701B35MR	LVR-IC	3.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
824	ed	XC9208A243M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 2.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
824	eh	XC9111F241MR	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
824	ej	XC6112A335MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
825	-	R1124N251B	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
825	-	XC6701B36MR	LVR-IC	3.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
825	ed	XC9208A253M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 2.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
825	eh	XC9111F251MR	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
825	ej	XC6112A336MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
826	-	R1124N261B	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
826	-	XC6701B37MR	LVR-IC	3.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
826	ed	XC9208A263M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 2.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
826	eh	XC9111F261MR	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
826	ej	XC6112A337MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
827	-	R1124N271B	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
827	-	XC6701B38MR	LVR-IC	3.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
827	ed	XC9208A273M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 2.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
827	eh	XC9111F271MR	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
827	ej	XC6112A338MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
828	-	R1124N281B	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
828	-	XC6701B39MR	LVR-IC	3.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
828	ed	XC9208A283M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 2.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
828	eh	XC9111F281MR	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
828	ej	XC6112A339MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
829	-	R1124N291B	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
829	-	XC6701B40MR	LVR-IC	4.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
829	ed	XC9208A293M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 2.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
829	eh	XC9111F291MR	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
829	ej	XC6112A340MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82A	-	RP103N241B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
82A	-	XC6701B41MR	LVR-IC	4.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82A	ed	XC9208A206M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 2.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
82A	ej	XC6112A341MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82A1	-	LX8211-00ISE	LVR-IC	Adjustable, 150mA	SOT-23-5	28sg	VR16	6a	Msc
82B	-	XC6701B42MR	LVR-IC	4.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82B	ed	XC9208A216M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 2.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
82B	ej	XC6112A342MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82B1	-	LX8211-25ISE	LVR-IC	2.5V±0.25%, 150mA	SOT-23-5	28vrx	VR7	6a	Msc
82C	-	XC6701B43MR	LVR-IC	4.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
82C	ed	XC9208A226M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 2.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
82C	ej	XC6112A343MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82D	-	XC6701B44MR	LVR-IC	4.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82D	ed	XC9208A236M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 2.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
82D	ej	XC6112A344MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82D1	-	LX8211-27ISE	LVR-IC	2.7V±0.25%, 150mA	SOT-23-5	28vrx	VR7	6a	Msc
82E	-	XC6701B45MR	LVR-IC	4.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82E	ed	XC9208A246M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 2.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
82E	ej	XC6112A345MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82E1	-	LX8211-28ISE	LVR-IC	2.8V±0.25%, 150mA	SOT-23-5	28vrx	VR7	6a	Msc
82F	-	XC6701B46MR	LVR-IC	4.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82F	ec	XC6112A316MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82F	ed	XC9208A256M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 2.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
82F	ej	XC6112A346MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82G1	-	LX8211-30ISE	LVR-IC	3.0V±0.25%, 150mA	SOT-23-5	28vrx	VR7	6a	Msc
82H	-	XC6701B47MR	LVR-IC	4.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82H	ec	XC6112A317MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82H	ed	XC9208A266M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 2.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
82H	ej	XC6112A347MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82K	-	XC6701B48MR	LVR-IC	4.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82K	ec	XC6112A318MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82K	ed	XC9208A276M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 2.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
82K	ej	XC6112A348MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82K1	-	LX8211-33ISE	LVR-IC	3.3V±0.25%, 150mA	SOT-23-5	28vrx	VR7	6a	Msc
82L	-	XC6701B49MR	LVR-IC	4.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82L	ec	XC6112A319MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82L	ed	XC9208A286M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 2.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
82L	ej	XC6112A349MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82M	-	XC6701B50MR	LVR-IC	5.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82M	ec	XC6112A320MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82M	ed	XC9208A296M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 2.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
82M	ej	XC6112A350MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82N	-	XC6701B51MR	LVR-IC	5.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82N	ec	XC6112A321MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82P	-	XC6701B52MR	LVR-IC	5.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82P	ec	XC6112A322MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82R	-	XC6701B53MR	LVR-IC	5.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82R	ec	XC6112A323MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82S	-	XC6701B54MR	LVR-IC	5.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82S	ec	XC6112A324MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82T	-	XC6701B55MR	LVR-IC	5.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82T	ec	XC6112A325MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82U	-	XC6701B56MR	LVR-IC	5.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82U	ec	XC6112A326MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82V	-	XC6701B57MR	LVR-IC	5.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82V	ec	XC6112A327MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82X	-	XC6701B58MR	LVR-IC	5.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82X	ec	XC6112A328MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82Y	-	XC6701B59MR	LVR-IC	5.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82Y	ec	XC6112A329MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82Y	ed	XC9208A2L6M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 2.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
82Z	-	XC6701B60MR	LVR-IC	6.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
82Z	ec	XC6112A330MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
82Z	ed	XC9208A2L3M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 2.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
83	-	RN5RF33BA	LVR-IC	LRip, +CE, 3.3V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
83	-	RN5RZ33BA	LVR-IC	LDO, LN, 3.3V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
830	-	R1124N301B	LVR-IC	LDO, Low noise, 3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
830	-	XC6701B61MR	LVR-IC	6.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
830	ed	XC9208A303M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 3.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
830	eh	XC9111F301MR	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
830	ej	XC6112A431MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
831	-	R1124N311B	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
831	-	XC6701B62MR	LVR-IC	6.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
831	ed	XC9208A313M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 3.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
831	eh	XC9111F311MR	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
831	ej	XC6112A432MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
832	-	R1124N321B	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
832	-	XC6701B63MR	LVR-IC	6.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
832	ed	XC9208A323M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 3.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
832	eh	XC9111F321MR	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
832	ej	XC6112A433MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
833	-	R1124N331B	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
833	-	XC6701B64MR	LVR-IC	6.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
833	ed	XC9208A333M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 3.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
833	eh	XC9111F331MR	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
833	ej	XC6112A434MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
834	-	R1124N341B	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
834	-	XC6701B65MR	LVR-IC	6.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
834	ed	XC9208A343M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 3.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
834	eh	XC9111F341MR	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
834	ej	XC6112A435MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
835	-	R1124N351B	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
835	-	XC6701B66MR	LVR-IC	6.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
835	ed	XC9208A353M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 3.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
835	eh	XC9111F351MR	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
835	ej	XC6112A436MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
836	-	R1124N361B	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
836	-	XC6701B67MR	LVR-IC	6.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
836	ed	XC9208A363M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 3.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
836	eh	XC9111F361MR	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
836	ej	XC6112A437MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
837	-	R1124N371B	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
837	-	XC6701B68MR	LVR-IC	6.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
837	ed	XC9208A373M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 3.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
837	eh	XC9111F371MR	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
837	ej	XC6112A438MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
838	-	R1124N381B	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
838	-	XC6701B69MR	LVR-IC	6.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
838	ed	XC9208A383M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 3.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
838	eh	XC9111F381MR	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
838	ej	XC6112A439MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
839	-	R1124N391B	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
839	-	XC6701B70MR	LVR-IC	7.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
839	ed	XC9208A393M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 3.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
839	eh	XC9111F391MR	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
839	ej	XC6112A440MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83A	-	RP103N241D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
83A	-	XC6701B71MR	LVR-IC	7.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83A	ed	XC9208A306M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 3.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
83A	ej	XC6112A441MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83B	-	XC6701B72MR	LVR-IC	7.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83B	ed	XC9208A316M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 3.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
83B	ej	XC6112A442MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83C	-	XC6701B73MR	LVR-IC	7.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83C	ed	XC9208A326M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 3.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
83C	ej	XC6112A443MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83D	-	XC6701B74MR	LVR-IC	7.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83D	ed	XC9208A336M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 3.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
83D	ej	XC6112A444MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83E	-	XC6701B75MR	LVR-IC	7.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83E	ed	XC9208A346M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 3.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
83E	ej	XC6112A445MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83F	-	XC6701B76MR	LVR-IC	7.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83F	ec	XC6112A416MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83F	ed	XC9208A356M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 3.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
83F	ej	XC6112A446MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83H	-	XC6701B77MR	LVR-IC	7.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83H	ec	XC6112A417MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83H	ed	XC9208A366M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 3.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
83H	ej	XC6112A447MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83K	-	XC6701B78MR	LVR-IC	7.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83K	ec	XC6112A418MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83K	ed	XC9208A376M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 3.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
83K	ej	XC6112A448MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83L	-	XC6701B79MR	LVR-IC	7.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83L	ec	XC6112A419MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83L	ed	XC9208A386M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 3.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
83L	ej	XC6112A449MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83M	-	XC6701B80MR	LVR-IC	8.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83M	ec	XC6112A420MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
83M	ed	XC9208A396M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 3.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
83M	ej	XC6112A450MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83N	-	XC6701B81MR	LVR-IC	8.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83N	ec	XC6112A421MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83P	-	XC6701B82MR	LVR-IC	8.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83P	ec	XC6112A422MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83R	-	XC6701B83MR	LVR-IC	8.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83R	ec	XC6112A423MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83S	-	XC6701B84MR	LVR-IC	8.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83S	ec	XC6112A424MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83T	-	XC6701B85MR	LVR-IC	8.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83T	ec	XC6112A425MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83U	-	XC6701B86MR	LVR-IC	8.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83U	ec	XC6112A426MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83V	-	XC6701B87MR	LVR-IC	8.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83V	ec	XC6112A427MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83X	-	XC6701B88MR	LVR-IC	8.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83X	ec	XC6112A428MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83Y	-	XC6701B89MR	LVR-IC	8.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83Y	ec	XC6112A429MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
83Z	-	MCP1804T-C002I/OT	LVR-IC	LDO, 12.0V±2%, 150mA, +CE	SOT-23-5	28hw	VR4	6g	Mcc
83Z	-	XC6701B90MR	LVR-IC	9.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
83Z	ec	XC6112A430MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84	-	RN5RF34BA	LVR-IC	LRip, +CE, 3.4V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
84	-	RN5RZ34BA	LVR-IC	LDO, LN, 3.4V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
840	-	R1124N401B	LVR-IC	LDO, Low noise, 4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
840	-	XC6701B91MR	LVR-IC	9.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
840	ed	XC9208A403M	DC-DC-IC	PWM-PWM/PFM step-down, 300kHz, 4.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
840	eh	XC9111F401MR	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
840	ej	XC6112A531MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
841	-	R1124N281B5	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
841	-	XC6701B92MR	LVR-IC	9.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
841	eh	XC9111F411MR	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
841	ej	XC6112A532MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
842	-	MCP1804T-3302I/OT	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28hw	VR4	6g	Mcc
842	-	XC6701B93MR	LVR-IC	9.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
842	eh	XC9111F421MR	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
842	ej	XC6112A533MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
843	-	XC6701B94MR	LVR-IC	9.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
843	eh	XC9111F431MR	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
843	ej	XC6112A534MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
844	-	XC6701B95MR	LVR-IC	9.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
844	eh	XC9111F441MR	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
844	ej	XC6112A535MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
845	-	XC6701B96MR	LVR-IC	9.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
845	eh	XC9111F451MR	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
845	ej	XC6112A536MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
846	-	XC6701B97MR	LVR-IC	9.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
846	eh	XC9111F461MR	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
846	ej	XC6112A537MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
847	-	XC6701B98MR	LVR-IC	9.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
847	eh	XC9111F471MR	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
847	ej	XC6112A538MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
848	-	XC6701B99MR	LVR-IC	9.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
848	eh	XC9111F481MR	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
848	ej	XC6112A539MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
849	-	MCP1804T-A002I/OT	LVR-IC	LDO, 10.0V±2%, 150mA, +CE	SOT-23-5	28hw	VR4	6g	Mcc
849	-	XC6701BA0MR	LVR-IC	10.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
849	eh	XC9111F491MR	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
849	ej	XC6112A540MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84A	-	XC6701BA1MR	LVR-IC	10.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84A	ed	XC9208A406M	DC-DC-IC	PWM-PWM/PFM step-down, 600kHz, 4.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
84A	ej	XC6112A541MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84B	-	XC6701BA2MR	LVR-IC	10.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84B	ej	XC6112A542MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84C	-	XC6701BA3MR	LVR-IC	10.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84C	ej	XC6112A543MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84D	-	XC6701BA4MR	LVR-IC	10.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84D	ej	XC6112A544MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84E	-	XC6701BA5MR	LVR-IC	10.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
84E	ej	XC6112A545MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84F	-	XC6701BA6MR	LVR-IC	10.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84F	ec	XC6112A516MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84F	ej	XC6112A546MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84H	-	XC6701BA7MR	LVR-IC	10.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84H	ec	XC6112A517MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84H	ej	XC6112A547MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84K	-	MCP1804T-1802I/OT	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28hw	VR4	6g	Mcc
84K	-	XC6701BA8MR	LVR-IC	10.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84K	ec	XC6112A518MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84K	ej	XC6112A548MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84L	-	XC6701BA9MR	LVR-IC	10.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84L	ec	XC6112A519MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84L	ej	XC6112A549MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84M	-	MCP1804T-5002I/OT	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-23-5	28hw	VR4	6g	Mcc
84M	-	XC6701BB0MR	LVR-IC	11.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84M	ec	XC6112A520MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84M	ej	XC6112A550MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84N	-	XC6701BB1MR	LVR-IC	11.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84N	ec	XC6112A521MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84P	-	XC6701BB2MR	LVR-IC	11.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84P	ec	XC6112A522MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84R	-	XC6701BB3MR	LVR-IC	11.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84R	ec	XC6112A523MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84S	-	XC6701BB4MR	LVR-IC	11.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84S	ec	XC6112A524MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84T	-	MCP1804T-2502I/OT	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28hw	VR4	6g	Mcc
84T	-	XC6701BB5MR	LVR-IC	11.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84T	ec	XC6112A525MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84U	-	XC6701BB6MR	LVR-IC	11.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84U	ec	XC6112A526MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84V	-	XC6701BB7MR	LVR-IC	11.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84V	ec	XC6112A527MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84X	-	XC6701BB8MR	LVR-IC	11.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84X	ec	XC6112A528MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84Y	-	XC6701BB9MR	LVR-IC	11.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84Y	ec	XC6112A529MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
84Z	-	XC6701BC0MR	LVR-IC	12.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
84Z	ec	XC6112A530MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85	-	RN5RF35BA	LVR-IC	LRip, +CE, 3.5V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
85	-	RN5RZ35BA	LVR-IC	LDO, LN, 3.5V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
850	eh	XC9111F501MR	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
850	ej	XC6112A631MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
851	eh	XC9111F511MR	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
851	ej	XC6112A632MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
852	eh	XC9111F521MR	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
852	ej	XC6112A633MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
853	eh	XC9111F531MR	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
853	ej	XC6112A634MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
854	eh	XC9111F541MR	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
854	ej	XC6112A635MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
855	eh	XC9111F551MR	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
855	ej	XC6112A636MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
856	eh	XC9111F561MR	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
856	ej	XC6112A637MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
857	eh	XC9111F571MR	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
857	ej	XC6112A638MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
858	eh	XC9111F581MR	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
858	ej	XC6112A639MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
859	eh	XC9111F591MR	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
859	ej	XC6112A640MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85A	ej	XC6112A641MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85A2	-	MAS9485AST2	LVR-IC	LDO, 2.8V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6a	Mas
85B	ej	XC6112A642MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85C	ej	XC6112A643MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85D	ej	XC6112A644MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85E	ej	XC6112A645MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85F	ec	XC6112A616MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85F	ej	XC6112A646MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85H	ec	XC6112A617MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
85H	ej	XC6112A647MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85K	ec	XC6112A618MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85K	ej	XC6112A648MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85L	ec	XC6112A619MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85L	ej	XC6112A649MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85M	ec	XC6112A620MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85M	ej	XC6112A650MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85N	ec	XC6112A621MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85P	ec	XC6112A622MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85R	ec	XC6112A623MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85S	ec	XC6112A624MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85T	ec	XC6112A625MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85U	ec	XC6112A626MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85V	ec	XC6112A627MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85X	ec	XC6112A628MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85Y	ec	XC6112A629MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
85Z	ec	XC6112A630MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD16	6g	Tor
86	-	RN5RF36BA	LVR-IC	LRip, +CE, 3.6V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
86	-	RN5RZ36BA	LVR-IC	LDO, LN, 3.6V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
860	eh	XC9111F601MR	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
860	ej	XC6112B231MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
861	eh	XC9111F611MR	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
861	ej	XC6112B232MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
862	eh	XC9111F621MR	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
862	ej	XC6112B233MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
863	eh	XC9111F631MR	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
863	ej	XC6112B234MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
864	eh	XC9111F641MR	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
864	ej	XC6112B235MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
865	eh	XC9111F651MR	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
865	ej	XC6112B236MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
866	eh	XC9111F661MR	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
866	ej	XC6112B237MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
867	eh	XC9111F671MR	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
867	ej	XC6112B238MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
868	eh	XC9111F681MR	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
868	ej	XC6112B239MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
869	eh	XC9111F691MR	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
869	ej	XC6112B240MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86A	ej	XC6112B241MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86B	ej	XC6112B242MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86C	ej	XC6112B243MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86D	ej	XC6112B244MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86E	ej	XC6112B245MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86F	ec	XC6112B216MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86F	ej	XC6112B246MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86H	ec	XC6112B217MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86H	ej	XC6112B247MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86K	ec	XC6112B218MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86K	ej	XC6112B248MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86L	ec	XC6112B219MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86L	ej	XC6112B249MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86M	ec	XC6112B220MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86M	ej	XC6112B250MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86N	ec	XC6112B221MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86P	ec	XC6112B222MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86R	ec	XC6112B223MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86S	ec	XC6112B224MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86T	ec	XC6112B225MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86U	ec	XC6112B226MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86V	ec	XC6112B227MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86X	ec	XC6112B228MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86Y	ec	XC6112B229MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
86Z	ec	XC6112B230MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87	-	RN5RF37BA	LVR-IC	LRip, +CE, 3.7V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
87	-	RN5RZ37BA	LVR-IC	LDO, LN, 3.7V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
870	eh	XC9111F701MR	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
870	ej	XC6112B331MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
871	ej	XC6112B332MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
872	ej	XC6112B333MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
873	ej	XC6112B334MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
874	ej	XC6112B335MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
875	ej	XC6112B336MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
876	ej	XC6112B337MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
877	ej	XC6112B338MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
878	ej	XC6112B339MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
879	ej	XC6112B340MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87A	ej	XC6112B341MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87B	ej	XC6112B342MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87C	ej	XC6112B343MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87D	ej	XC6112B344MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87E	ej	XC6112B345MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87F	ec	XC6112B316MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87F	ej	XC6112B346MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87H	ec	XC6112B317MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87H	ej	XC6112B347MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87K	ec	XC6112B318MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87K	ej	XC6112B348MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87L	ec	XC6112B319MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87L	ej	XC6112B349MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87M	ec	XC6112B320MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87M	ej	XC6112B350MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87N	ec	XC6112B321MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87P	ec	XC6112B322MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87R	ec	XC6112B323MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87S	ec	XC6112B324MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87T	ec	XC6112B325MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87U	ec	XC6112B326MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87V	ec	XC6112B327MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87X	ec	XC6112B328MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87Y	ec	XC6112B329MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
87Z	ec	XC6112B330MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88	-	RN5RF38BA	LVR-IC	LRip, +CE, 3.8V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
88	-	RN5RZ38BA	LVR-IC	LDO, LN, 3.8V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
880	ej	XC6112B431MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
881	ej	XC6112B432MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
882	ej	XC6112B433MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
883	ej	XC6112B434MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
884	ej	XC6112B435MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
885	ej	XC6112B436MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
886	ej	XC6112B437MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
887	ej	XC6112B438MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
888	ej	XC6112B439MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
889	ej	XC6112B440MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88A	ej	XC6112B441MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88B	ej	XC6112B442MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88C	ej	XC6112B443MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88D	ej	XC6112B444MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88E	ej	XC6112B445MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88F	ec	XC6112B416MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88F	ej	XC6112B446MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88H	ec	XC6112B417MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88H	ej	XC6112B447MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88K	ec	XC6112B418MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88K	ej	XC6112B448MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88L	ec	XC6112B419MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88L	ej	XC6112B449MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88M	ec	XC6112B420MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88M	ej	XC6112B450MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88N	ec	XC6112B421MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88P	ec	XC6112B422MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88R	ec	XC6112B423MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88S	ec	XC6112B424MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88T	ec	XC6112B425MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88U	ec	XC6112B426MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88V	ec	XC6112B427MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88X	ec	XC6112B428MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88Y	ec	XC6112B429MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
88Z	ec	XC6112B430MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89	-	RN5RF39BA	LVR-IC	LRip, +CE, 3.9V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
89	-	RN5RZ39BA	LVR-IC	LDO, LN, 3.9V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
890	ej	XC6112B531MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
891	ej	XC6112B532MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
892	ej	XC6112B533MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
893	ej	XC6112B534MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
894	ej	XC6112B535MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
895	ej	XC6112B536MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
896	ej	XC6112B537MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
897	ej	XC6112B538MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
898	ej	XC6112B539MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
899	ej	XC6112B540MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89A	ej	XC6112B541MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89B	ej	XC6112B542MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89C	ej	XC6112B543MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89D	ej	XC6112B544MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89E	ej	XC6112B545MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89F	ec	XC6112B516MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89F	ej	XC6112B546MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89H	ec	XC6112B517MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89H	ej	XC6112B547MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89K	ec	XC6112B518MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89K	ej	XC6112B548MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89L	ec	XC6112B519MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89L	ej	XC6112B549MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89M	ec	XC6112B520MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89M	ej	XC6112B550MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89N	ec	XC6112B521MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89P	ec	XC6112B522MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89R	ec	XC6112B523MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89S	ec	XC6112B524MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89T	ec	XC6112B525MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89U	ec	XC6112B526MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89V	ec	XC6112B527MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89X	ec	XC6112B528MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89Y	ec	XC6112B529MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
89Z	ec	XC6112B530MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8A0	-	LN1138A312KR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8A0	-	LN1138A312MR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8A0	-	XC6701BC1MR	LVR-IC	12.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8A0	ej	XC6112B631MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8A1	-	LN1138A322KR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8A1	-	LN1138A322MR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8A1	-	XC6701BC2MR	LVR-IC	12.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8A1	ej	XC6112B632MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8A2	-	LN1138A332KR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8A2	-	LN1138A332MR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8A2	-	XC6701BC3MR	LVR-IC	12.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8A2	ej	XC6112B633MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8A3	-	LN1138A342KR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8A3	-	LN1138A342MR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8A3	-	XC6701BC4MR	LVR-IC	12.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8A3	ej	XC6112B634MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8A4	-	LN1138A352KR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8A4	-	LN1138A352MR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8A4	-	XC6701BC5MR	LVR-IC	12.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8A4	ej	XC6112B635MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8A5	-	LN1138A362KR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8A5	-	LN1138A362MR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8A5	-	XC6701BC6MR	LVR-IC	12.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8A5	ej	XC6112B636MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8A6	-	LN1138A372KR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8A6	-	LN1138A372MR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8A6	-	XC6701BC7MR	LVR-IC	12.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8A6	ej	XC6112B637MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8A7	-	LN1138A382KR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8A7	-	LN1138A382MR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8A7	-	XC6701BC8MR	LVR-IC	12.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8A7	ej	XC6112B638MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8A8	-	LN1138A392KR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8A8	-	LN1138A392MR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8A8	-	XC6701BC9MR	LVR-IC	12.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8A8	ej	XC6112B639MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8A9	-	LN1138A402KR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8A9	-	LN1138A402MR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8A9	-	XC6701BD0MR	LVR-IC	13.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8A9	ej	XC6112B640MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AA	-	LN1138A412KR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AA	-	LN1138A412MR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AA	-	XC6701BD1MR	LVR-IC	13.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AA	ej	XC6112B641MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AB	-	LN1138A422KR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AB	-	LN1138A422MR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AB	-	XC6701BD2MR	LVR-IC	13.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AB	ej	XC6112B642MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AC	-	LN1138A432KR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AC	-	LN1138A432MR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AC	-	XC6701BD3MR	LVR-IC	13.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AC	ej	XC6112B643MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AD	-	LN1138A442KR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AD	-	LN1138A442MR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AD	-	XC6701BD4MR	LVR-IC	13.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AD	ej	XC6112B644MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AE	-	LN1138A452KR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AE	-	LN1138A452MR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AE	-	XC6701BD5MR	LVR-IC	13.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AE	ej	XC6112B645MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AF	-	LN1138A462KR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AF	-	LN1138A462MR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AF	-	XC6701BD6MR	LVR-IC	13.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AF	ec	XC6112B616MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AF	ej	XC6112B646MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AH	-	LN1138A472KR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AH	-	LN1138A472MR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AH	-	XC6701BD7MR	LVR-IC	13.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AH	ec	XC6112B617MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AH	ej	XC6112B647MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AK	-	LN1138A482KR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AK	-	LN1138A482MR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AK	-	XC6701BD8MR	LVR-IC	13.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AK	ec	XC6112B618MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AK	ej	XC6112B648MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AL	-	LN1138A492KR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AL	-	LN1138A492MR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AL	-	XC6701BD9MR	LVR-IC	13.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AL	ec	XC6112B619MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AL	ej	XC6112B649MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AM	-	LN1138A502KR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AM	-	LN1138A502MR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AM	-	XC6701BE0MR	LVR-IC	14.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AM	ec	XC6112B620MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AM	ed	XC9208A09CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 0.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8AM	ej	XC6112B650MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AN	-	LN1138A512KR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AN	-	LN1138A512MR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AN	-	XC6701BE1MR	LVR-IC	14.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AN	ec	XC6112B621MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AP	-	LN1138A522KR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AP	-	LN1138A522MR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AP	-	XC6701BE2MR	LVR-IC	14.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AP	ec	XC6112B622MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AR	-	LN1138A532KR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AR	-	LN1138A532MR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AR	-	XC6701BE3MR	LVR-IC	14.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AR	ec	XC6112B623MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AS	-	LN1138A542KR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AS	-	LN1138A542MR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AS	-	XC6701BE4MR	LVR-IC	14.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AS	ec	XC6112B624MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AT	-	LN1138A552KR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AT	-	LN1138A552MR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8AT	-	XC6701BE5MR	LVR-IC	14.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AT	ec	XC6112B625MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AU	-	LN1138A562KR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AU	-	LN1138A562MR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AU	-	XC6701BE6MR	LVR-IC	14.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AU	ec	XC6112B626MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AV	-	LN1138A572KR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AV	-	LN1138A572MR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AV	-	XC6701BE7MR	LVR-IC	14.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AV	ec	XC6112B627MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AX	-	LN1138A582KR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AX	-	LN1138A582MR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AX	-	XC6701BE8MR	LVR-IC	14.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AX	ec	XC6112B628MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AY	-	LN1138A592KR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AY	-	LN1138A592MR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AY	-	XC6701BE9MR	LVR-IC	14.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AY	ec	XC6112B629MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8AZ	-	LN1138A602KR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8AZ	-	LN1138A602MR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8AZ	-	XC6701BF0MR	LVR-IC	15.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8AZ	ec	XC6112B630MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD16	6g	Tor
8B	-	R3111N181A	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
8B	-	RN5RL28AA	LVR-IC	2.8V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
8B	eu	RN5VD18CA	Vdet-IC	1.8V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
8B0	-	LN1138B312KR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8B0	-	LN1138B312MR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8B0	-	XC6701BF1MR	LVR-IC	15.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8B0	ej	XC6112C231MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8B1	-	LN1138B322KR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8B1	-	LN1138B322MR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8B1	-	XC6701BF2MR	LVR-IC	15.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8B1	ej	XC6112C232MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8B2	-	LN1138B332KR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8B2	-	LN1138B332MR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8B2	-	XC6701BF3MR	LVR-IC	15.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8B2	ej	XC6112C233MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8B3	-	LN1138B342KR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8B3	-	LN1138B342MR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8B3	-	XC6701BF4MR	LVR-IC	15.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8B3	ej	XC6112C234MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8B4	-	LN1138B352KR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8B4	-	LN1138B352MR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8B4	-	XC6701BF5MR	LVR-IC	15.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8B4	ej	XC6112C235MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8B5	-	LN1138B362KR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8B5	-	LN1138B362MR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8B5	-	XC6701BF6MR	LVR-IC	15.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8B5	ej	XC6112C236MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8B6	-	LN1138B372KR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8B6	-	LN1138B372MR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8B6	-	XC6701BF7MR	LVR-IC	15.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8B6	ej	XC6112C237MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8B7	-	LN1138B382KR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8B7	-	LN1138B382MR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8B7	-	XC6701BF8MR	LVR-IC	15.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8B7	ej	XC6112C238MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8B8	-	LN1138B392KR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8B8	-	LN1138B392MR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8B8	-	XC6701BF9MR	LVR-IC	15.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8B8	ej	XC6112C239MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8B9	-	LN1138B402KR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8B9	-	LN1138B402MR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8B9	-	XC6701BG0MR	LVR-IC	16.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8B9	ej	XC6112C240MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BA	-	LN1138B412KR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BA	-	LN1138B412MR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BA	-	XC6701BG1MR	LVR-IC	16.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BA	ed	XC9208A10CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 1.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8BA	ej	XC6112C241MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8BB	-	LN1138B422KR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BB	-	LN1138B422MR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BB	-	XC6701BG2MR	LVR-IC	16.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BB	ed	XC9208A11CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 1.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8BB	ej	XC6112C242MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BC	-	LN1138B432KR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BC	-	LN1138B432MR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BC	-	XC6701BG3MR	LVR-IC	16.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BC	ed	XC9208A12CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 1.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8BC	ej	XC6112C243MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BD	-	LN1138B442KR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BD	-	LN1138B442MR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BD	-	XC6701BG4MR	LVR-IC	16.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BD	ed	XC9208A13CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 1.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8BD	ej	XC6112C244MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BE	-	LN1138B452KR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BE	-	LN1138B452MR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BE	-	XC6701BG5MR	LVR-IC	16.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BE	ed	XC9208A14CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 1.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8BE	ej	XC6112C245MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BF	-	LN1138B462KR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BF	-	LN1138B462MR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BF	-	XC6701BG6MR	LVR-IC	16.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BF	ec	XC6112C216MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BF	ed	XC9208A15CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 1.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8BF	ej	XC6112C246MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BH	-	LN1138B472KR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BH	-	LN1138B472MR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BH	-	XC6701BG7MR	LVR-IC	16.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BH	ec	XC6112C217MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BH	ed	XC9208A16CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 1.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8BH	ej	XC6112C247MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BK	-	LN1138B482KR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BK	-	LN1138B482MR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BK	-	XC6701BG8MR	LVR-IC	16.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BK	ec	XC6112C218MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BK	ed	XC9208A17CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 1.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8BK	ej	XC6112C248MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BL	-	LN1138B492KR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BL	-	LN1138B492MR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BL	-	XC6701BG9MR	LVR-IC	16.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BL	ec	XC6112C219MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BL	ed	XC9208A18CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 1.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8BL	ej	XC6112C249MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BM	-	LN1138B502KR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BM	-	LN1138B502MR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BM	-	XC6701BH0MR	LVR-IC	17.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BM	ec	XC6112C220MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BM	ed	XC9208A19CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 1.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8BM	ej	XC6112C250MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BN	-	LN1138B512KR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BN	-	LN1138B512MR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BN	-	XC6701BH1MR	LVR-IC	17.1V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BN	ec	XC6112C221MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BP	-	LN1138B522KR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BP	-	LN1138B522MR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BP	-	XC6701BH2MR	LVR-IC	17.2V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BP	ec	XC6112C222MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BR	-	LN1138B532KR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BR	-	LN1138B532MR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BR	-	XC6701BH3MR	LVR-IC	17.3V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BR	ec	XC6112C223MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BS	-	LN1138B542KR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BS	-	LN1138B542MR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BS	-	XC6701BH4MR	LVR-IC	17.4V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BS	ec	XC6112C224MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BT	-	LN1138B552KR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BT	-	LN1138B552MR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BT	-	XC6701BH5MR	LVR-IC	17.5V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BT	ec	XC6112C225MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8BU	-	LN1138B562KR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BU	-	LN1138B562MR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BU	-	XC6701BH6MR	LVR-IC	17.6V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BU	ec	XC6112C226MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BV	-	LN1138B572KR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BV	-	LN1138B572MR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BV	-	XC6701BH7MR	LVR-IC	17.7V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BV	ec	XC6112C227MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BX	-	LN1138B582KR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BX	-	LN1138B582MR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BX	-	XC6701BH8MR	LVR-IC	17.8V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BX	ec	XC6112C228MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BY	-	LN1138B592KR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BY	-	LN1138B592MR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BY	-	XC6701BH9MR	LVR-IC	17.9V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BY	ec	XC6112C229MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8BY	ed	XC9208A1LCM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 1.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8BZ	-	LN1138B602KR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8BZ	-	LN1138B602MR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8BZ	-	XC6701BJ0MR	LVR-IC	18.0V±2%, 150mA, +CE	SOT-25	28hw	VR4	6g	Tor
8BZ	ec	XC6112C230MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8C	-	R3111N281A	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
8C	-	RN5RL38AA	LVR-IC	3.8V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
8C	eu	RN5VD28CA	Vdet-IC	2.8V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
8C0	-	LN1138C312KR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8C0	-	LN1138C312MR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8C0	ej	XC6112C331MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8C1	-	LN1138C322KR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8C1	-	LN1138C322MR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8C1	ej	XC6112C332MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8C2	-	LN1138C332KR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8C2	-	LN1138C332MR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8C2	ej	XC6112C333MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8C3	-	LN1138C342KR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8C3	-	LN1138C342MR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8C3	ej	XC6112C334MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8C4	-	LN1138C352KR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8C4	-	LN1138C352MR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8C4	ej	XC6112C335MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8C5	-	LN1138C362KR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8C5	-	LN1138C362MR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8C5	ej	XC6112C336MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8C6	-	LN1138C372KR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8C6	-	LN1138C372MR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8C6	ej	XC6112C337MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8C7	-	LN1138C382KR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8C7	-	LN1138C382MR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8C7	ej	XC6112C338MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8C8	-	LN1138C392KR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8C8	-	LN1138C392MR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8C8	ej	XC6112C339MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8C9	-	LN1138C402KR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8C9	-	LN1138C402MR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8C9	ej	XC6112C340MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CA	-	LN1138C412KR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CA	-	LN1138C412MR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CA	ed	XC9208A20CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 2.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8CA	ej	XC6112C341MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CB	-	LN1138C422KR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CB	-	LN1138C422MR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CB	ed	XC9208A21CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 2.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8CB	ej	XC6112C342MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CC	-	LN1138C432KR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CC	-	LN1138C432MR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CC	ed	XC9208A22CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 2.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8CC	ej	XC6112C343MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CD	-	LN1138C442KR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CD	-	LN1138C442MR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CD	ed	XC9208A23CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 2.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8CD	ej	XC6112C344MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8CE	-	LN1138C452KR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CE	-	LN1138C452MR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CE	ed	XC9208A24CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 2.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8CE	ej	XC6112C345MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CF	-	LN1138C462KR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CF	-	LN1138C462MR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CF	ec	XC6112C316MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CF	ed	XC9208A25CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 2.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8CF	ej	XC6112C346MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CH	-	LN1138C472KR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CH	-	LN1138C472MR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CH	ec	XC6112C317MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CH	ed	XC9208A26CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 2.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8CH	ej	XC6112C347MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CK	-	LN1138C482KR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CK	-	LN1138C482MR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CK	ec	XC6112C318MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CK	ed	XC9208A27CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 2.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8CK	ej	XC6112C348MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CL	-	LN1138C492KR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CL	-	LN1138C492MR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CL	ec	XC6112C319MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CL	ed	XC9208A28CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 2.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8CL	ej	XC6112C349MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CM	-	LN1138C502KR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CM	-	LN1138C502MR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CM	ec	XC6112C320MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CM	ed	XC9208A29CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 2.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8CM	ej	XC6112C350MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CN	-	LN1138C512KR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CN	-	LN1138C512MR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CN	ec	XC6112C321MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CP	-	LN1138C522KR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CP	-	LN1138C522MR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CP	ec	XC6112C322MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CR	-	LN1138C532KR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CR	-	LN1138C532MR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CR	ec	XC6112C323MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CS	-	LN1138C542KR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CS	-	LN1138C542MR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CS	ec	XC6112C324MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CT	-	LN1138C552KR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CT	-	LN1138C552MR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CT	ec	XC6112C325MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CU	-	LN1138C562KR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CU	-	LN1138C562MR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CU	ec	XC6112C326MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CV	-	LN1138C572KR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CV	-	LN1138C572MR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CV	ec	XC6112C327MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CX	-	LN1138C582KR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CX	-	LN1138C582MR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CX	ec	XC6112C328MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CY	-	LN1138C592KR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CY	-	LN1138C592MR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CY	ec	XC6112C329MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8CY	ed	XC9208A2LCM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 2.85V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8CZ	-	LN1138C602KR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8CZ	-	LN1138C602MR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8CZ	ec	XC6112C330MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8D	-	R3111N381A	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
8D	-	RN5RL48AA	LVR-IC	4.8V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
8D	eu	RN5VD38CA	Vdet-IC	3.8V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
8D0	-	LN1138D312KR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8D0	-	LN1138D312MR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8D0	ej	XC6112C431MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8D1	-	LN1138D322KR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8D1	-	LN1138D322MR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8D1	ej	XC6112C432MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8D2	-	LN1138D332KR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8D2	-	LN1138D332MR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8D2	ej	XC6112C433MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8D3	-	LN1138D342KR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8D3	-	LN1138D342MR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8D3	ej	XC6112C434MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8D4	-	LN1138D352KR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8D4	-	LN1138D352MR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8D4	ej	XC6112C435MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8D5	-	LN1138D362KR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8D5	-	LN1138D362MR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8D5	ej	XC6112C436MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8D6	-	LN1138D372KR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8D6	-	LN1138D372MR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8D6	ej	XC6112C437MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8D7	-	LN1138D382KR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8D7	-	LN1138D382MR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8D7	ej	XC6112C438MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8D8	-	LN1138D392KR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8D8	-	LN1138D392MR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8D8	ej	XC6112C439MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8D9	-	LN1138D402KR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8D9	-	LN1138D402MR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8D9	ej	XC6112C440MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DA	-	LN1138D412KR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DA	-	LN1138D412MR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DA	ed	XC9208A30CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 3.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8DA	ej	XC6112C441MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DB	-	LN1138D422KR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DB	-	LN1138D422MR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DB	ed	XC9208A31CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 3.1V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8DB	ej	XC6112C442MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DC	-	LN1138D432KR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DC	-	LN1138D432MR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DC	ed	XC9208A32CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 3.2V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8DC	ej	XC6112C443MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DD	-	LN1138D442KR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DD	-	LN1138D442MR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DD	ed	XC9208A33CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 3.3V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8DD	ej	XC6112C444MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DE	-	LN1138D452KR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DE	-	LN1138D452MR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DE	ed	XC9208A34CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 3.4V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8DE	ej	XC6112C445MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DF	-	LN1138D462KR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DF	-	LN1138D462MR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DF	ec	XC6112C416MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DF	ed	XC9208A35CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 3.5V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8DF	ej	XC6112C446MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DH	-	LN1138D472KR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DH	-	LN1138D472MR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DH	ec	XC6112C417MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DH	ed	XC9208A36CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 3.6V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8DH	ej	XC6112C447MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DK	-	LN1138D482KR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DK	-	LN1138D482MR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DK	ec	XC6112C418MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DK	ed	XC9208A37CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 3.7V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8DK	ej	XC6112C448MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DL	-	LN1138D492KR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DL	-	LN1138D492MR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DL	ec	XC6112C419MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DL	ed	XC9208A38CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 3.8V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8DL	ej	XC6112C449MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DM	-	LN1138D502KR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DM	-	LN1138D502MR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DM	ec	XC6112C420MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DM	ed	XC9208A39CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 3.9V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8DM	ej	XC6112C450MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DN	-	LN1138D512KR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DN	-	LN1138D512MR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8DN	ec	XC6112C421MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DP	-	LN1138D522KR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DP	-	LN1138D522MR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DP	ec	XC6112C422MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DR	-	LN1138D532KR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DR	-	LN1138D532MR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DR	ec	XC6112C423MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DS	-	LN1138D542KR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DS	-	LN1138D542MR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DS	ec	XC6112C424MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DT	-	LN1138D552KR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DT	-	LN1138D552MR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DT	ec	XC6112C425MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DU	-	LN1138D562KR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DU	-	LN1138D562MR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DU	ec	XC6112C426MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DV	-	LN1138D572KR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DV	-	LN1138D572MR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DV	ec	XC6112C427MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DX	-	LN1138D582KR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DX	-	LN1138D582MR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DX	ec	XC6112C428MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DY	-	LN1138D592KR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DY	-	LN1138D592MR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DY	ec	XC6112C429MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8DZ	-	LN1138D602KR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8DZ	-	LN1138D602MR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8DZ	ec	XC6112C430MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8E	-	R3111N481A	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
8E	-	RN5RL58AA	LVR-IC	5.8V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
8E	eu	RN5VD48CA	Vdet-IC	4.8V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
8E0	ej	XC6112C531MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8E1	ej	XC6112C532MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8E2	ej	XC6112C533MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8E3	ej	XC6112C534MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8E4	ej	XC6112C535MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8E5	ej	XC6112C536MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8E6	ej	XC6112C537MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8E7	ej	XC6112C538MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8E8	ej	XC6112C539MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8E9	-	LN1138A10AKR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8E9	-	LN1138A10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8E9	ej	XC6112C540MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EA	-	LN1138A11AKR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8EA	-	LN1138A11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8EA	ed	XC9208A40CM	DC-DC-IC	PWM-PWM/PFM step-down, 1.2MHz, 4.0V±2%, 600mA, +CE	SOT-25	28zq	DC1	6g	Tor
8EA	ej	XC6112C541MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EB	-	LN1138A12AKR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8EB	-	LN1138A12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8EB	ej	XC6112C542MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EC	-	LN1138A13AKR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8EC	-	LN1138A13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8EC	ej	XC6112C543MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8ED	-	LN1138A14AKR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8ED	-	LN1138A14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8ED	ej	XC6112C544MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EE	-	LN1138A15AKR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8EE	-	LN1138A15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8EE	ej	XC6112C545MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EF	-	LN1138A16AKR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8EF	-	LN1138A16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8EF	ec	XC6112C516MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EF	ej	XC6112C546MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EH	-	LN1138A17AKR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8EH	-	LN1138A17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8EH	ec	XC6112C517MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EH	ej	XC6112C547MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EK	-	LN1138A18AKR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8EK	-	LN1138A18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8EK	ec	XC6112C518MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8EK	ej	XC6112C548MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EL	-	LN1138A19AKR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8EL	-	LN1138A19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8EL	ec	XC6112C519MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EL	ej	XC6112C549MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EM	-	LN1138A20AKR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8EM	-	LN1138A20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8EM	ec	XC6112C520MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EM	ej	XC6112C550MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EN	-	LN1138A21AKR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8EN	-	LN1138A21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8EN	ec	XC6112C521MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EP	-	LN1138A22AKR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8EP	-	LN1138A22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8EP	ec	XC6112C522MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8ER	-	LN1138A23AKR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8ER	-	LN1138A23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8ER	ec	XC6112C523MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8ES	-	LN1138A24AKR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8ES	-	LN1138A24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8ES	ec	XC6112C524MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8ET	-	LN1138A25AKR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8ET	-	LN1138A25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8ET	ec	XC6112C525MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EU	-	LN1138A26AKR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8EU	-	LN1138A26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8EU	ec	XC6112C526MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EV	-	LN1138A27AKR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8EV	-	LN1138A27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8EV	ec	XC6112C527MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EX	-	LN1138A28AKR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8EX	-	LN1138A28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8EX	ec	XC6112C528MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EY	-	LN1138A29AKR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8EY	-	LN1138A29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8EY	ec	XC6112C529MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8EZ	-	LN1138A30AKR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8EZ	-	LN1138A30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8EZ	ec	XC6112C530MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8F	-	R3111N581A	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
8F	eu	RN5VD58CA	Vdet-IC	5.8V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
8F0	ej	XC6112C631MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8F1	ej	XC6112C632MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8F2	ej	XC6112C633MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8F3	ej	XC6112C634MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8F4	ej	XC6112C635MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8F5	ej	XC6112C636MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8F6	ej	XC6112C637MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8F7	ej	XC6112C638MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8F8	ej	XC6112C639MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8F9	-	LN1138B10AKR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8F9	-	LN1138B10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8F9	ej	XC6112C640MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FA	-	LN1138B11AKR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FA	-	LN1138B11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FA	ej	XC6112C641MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FB	-	LN1138B12AKR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FB	-	LN1138B12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FB	ej	XC6112C642MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FC	-	LN1138B13AKR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FC	-	LN1138B13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FC	ej	XC6112C643MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FD	-	LN1138B14AKR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FD	-	LN1138B14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FD	ej	XC6112C644MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FE	-	LN1138B15AKR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FE	-	LN1138B15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FE	ej	XC6112C645MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FF	-	LN1138B16AKR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FF	-	LN1138B16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8FF	ec	XC6112C616MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FF	ej	XC6112C646MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FH	-	LN1138B17AKR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FH	-	LN1138B17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FH	ec	XC6112C617MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FH	ej	XC6112C647MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FK	-	LN1138B18AKR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FK	-	LN1138B18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FK	ec	XC6112C618MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FK	ej	XC6112C648MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FL	-	LN1138B19AKR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FL	-	LN1138B19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FL	ec	XC6112C619MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FL	ej	XC6112C649MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FM	-	LN1138B20AKR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FM	-	LN1138B20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FM	ec	XC6112C620MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FM	ej	XC6112C650MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FN	-	LN1138B21AKR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FN	-	LN1138B21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FN	ec	XC6112C621MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FP	-	LN1138B22AKR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FP	-	LN1138B22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FP	ec	XC6112C622MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FR	-	LN1138B23AKR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FR	-	LN1138B23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FR	ec	XC6112C623MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FS	-	LN1138B24AKR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FS	-	LN1138B24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FS	ec	XC6112C624MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FT	-	LN1138B25AKR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FT	-	LN1138B25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FT	ec	XC6112C625MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FU	-	LN1138B26AKR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FU	-	LN1138B26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FU	ec	XC6112C626MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FV	-	LN1138B27AKR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FV	-	LN1138B27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FV	ec	XC6112C627MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FX	-	LN1138B28AKR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FX	-	LN1138B28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FX	ec	XC6112C628MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FY	-	LN1138B29AKR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FY	-	LN1138B29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FY	ec	XC6112C629MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8FZ	-	LN1138B30AKR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8FZ	-	LN1138B30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8FZ	ec	XC6112C630MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD16	6g	Tor
8H0	ej	XC6112D331MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8H1	ej	XC6112D332MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8H2	ej	XC6112D333MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8H3	ej	XC6112D334MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8H4	ej	XC6112D335MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8H5	ej	XC6112D336MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8H6	ej	XC6112D337MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8H7	ej	XC6112D338MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8H8	ej	XC6112D339MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8H9	-	LN1138C10AKR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8H9	-	LN1138C10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8H9	ej	XC6112D340MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HA	-	LN1138C11AKR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HA	-	LN1138C11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HA	ej	XC6112D341MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HB	-	LN1138C12AKR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HB	-	LN1138C12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HB	ej	XC6112D342MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HC	-	LN1138C13AKR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HC	-	LN1138C13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HC	ej	XC6112D343MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HD	-	LN1138C14AKR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8HD	-	LN1138C14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HD	ej	XC6112D344MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HE	-	LN1138C15AKR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HE	-	LN1138C15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HE	ej	XC6112D345MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HF	-	LN1138C16AKR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HF	-	LN1138C16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HF	ec	XC6112D316MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HF	ej	XC6112D346MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HH	-	LN1138C17AKR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HH	-	LN1138C17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HH	ec	XC6112D317MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HH	ej	XC6112D347MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HK	-	LN1138C18AKR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HK	-	LN1138C18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HK	ec	XC6112D318MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HK	ej	XC6112D348MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HL	-	LN1138C19AKR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HL	-	LN1138C19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HL	ec	XC6112D319MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HL	ej	XC6112D349MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HM	-	LN1138C20AKR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HM	-	LN1138C20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HM	ec	XC6112D320MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HM	ej	XC6112D350MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HN	-	LN1138C21AKR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HN	-	LN1138C21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HN	ec	XC6112D321MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HP	-	LN1138C22AKR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HP	-	LN1138C22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HP	ec	XC6112D322MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HR	-	LN1138C23AKR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HR	-	LN1138C23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HR	ec	XC6112D323MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HS	-	LN1138C24AKR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HS	-	LN1138C24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HS	ec	XC6112D324MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HT	-	LN1138C25AKR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HT	-	LN1138C25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HT	ec	XC6112D325MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HU	-	LN1138C26AKR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HU	-	LN1138C26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HU	ec	XC6112D326MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HV	-	LN1138C27AKR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HV	-	LN1138C27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HV	ec	XC6112D327MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HX	-	LN1138C28AKR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HX	-	LN1138C28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HX	ec	XC6112D328MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HY	-	LN1138C29AKR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HY	-	LN1138C29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HY	ec	XC6112D329MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8HZ	-	LN1138C30AKR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8HZ	-	LN1138C30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8HZ	ec	XC6112D330MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8J	-	R3111N181C	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
8K	-	R3111N281C	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
8K0	ej	XC6112D431MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8K1	ej	XC6112D432MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8K2	ej	XC6112D433MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8K3	ej	XC6112D434MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8K4	ej	XC6112D435MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8K5	ej	XC6112D436MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8K6	ej	XC6112D437MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8K7	ej	XC6112D438MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8K8	ej	XC6112D439MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8K9	-	LN1138D10AKR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8K9	-	LN1138D10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8K9	ej	XC6112D440MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KA	-	LN1138D11AKR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8KA	-	LN1138D11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KA	ej	XC6112D441MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KB	-	LN1138D12AKR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KB	-	LN1138D12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KB	ej	XC6112D442MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KC	-	LN1138D13AKR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KC	-	LN1138D13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KC	ej	XC6112D443MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KD	-	LN1138D14AKR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KD	-	LN1138D14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KD	ej	XC6112D444MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KE	-	LN1138D15AKR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KE	-	LN1138D15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KE	ej	XC6112D445MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KF	-	LN1138D16AKR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KF	-	LN1138D16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KF	ec	XC6112D416MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KF	ej	XC6112D446MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KH	-	LN1138D17AKR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KH	-	LN1138D17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KH	ec	XC6112D417MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KH	ej	XC6112D447MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KK	-	LN1138D18AKR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KK	-	LN1138D18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KK	ec	XC6112D418MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KK	ej	XC6112D448MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KL	-	LN1138D19AKR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KL	-	LN1138D19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KL	ec	XC6112D419MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KL	ej	XC6112D449MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KM	-	LN1138D20AKR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KM	-	LN1138D20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KM	ec	XC6112D420MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KM	ej	XC6112D450MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KN	-	LN1138D21AKR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KN	-	LN1138D21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KN	ec	XC6112D421MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KP	-	LN1138D22AKR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KP	-	LN1138D22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KP	ec	XC6112D422MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KR	-	LN1138D23AKR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KR	-	LN1138D23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KR	ec	XC6112D423MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KS	-	LN1138D24AKR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KS	-	LN1138D24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KS	ec	XC6112D424MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KT	-	LN1138D25AKR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KT	-	LN1138D25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KT	ec	XC6112D425MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KU	-	LN1138D26AKR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KU	-	LN1138D26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KU	ec	XC6112D426MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KV	-	LN1138D27AKR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KV	-	LN1138D27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KV	ec	XC6112D427MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KX	-	LN1138D28AKR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KX	-	LN1138D28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KX	ec	XC6112D428MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KY	-	LN1138D29AKR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KY	-	LN1138D29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KY	ec	XC6112D429MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8KZ	-	LN1138D30AKR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8KZ	-	LN1138D30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8KZ	ec	XC6112D430MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8L	-	R3111N381C	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
8L0	-	LN1138A31AKR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8L0	-	LN1138A31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8L0	ej	XC6112D531MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8L1	-	LN1138A32AKR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8L1	-	LN1138A32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8L1	ej	XC6112D532MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8L2	-	LN1138A33AKR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8L2	-	LN1138A33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8L2	ej	XC6112D533MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8L3	-	LN1138A34AKR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8L3	-	LN1138A34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8L3	ej	XC6112D534MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8L4	-	LN1138A35AKR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8L4	-	LN1138A35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8L4	ej	XC6112D535MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8L5	-	LN1138A36AKR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8L5	-	LN1138A36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8L5	ej	XC6112D536MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8L6	-	LN1138A37AKR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8L6	-	LN1138A37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8L6	ej	XC6112D537MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8L7	-	LN1138A38AKR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8L7	-	LN1138A38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8L7	ej	XC6112D538MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8L8	-	LN1138A39AKR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8L8	-	LN1138A39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8L8	ej	XC6112D539MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8L9	-	LN1138A40AKR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8L9	-	LN1138A40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8L9	ej	XC6112D540MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LA	-	LN1138A41AKR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LA	-	LN1138A41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LA	ej	XC6112D541MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LB	-	LN1138A42AKR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LB	-	LN1138A42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LB	ej	XC6112D542MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LC	-	LN1138A43AKR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LC	-	LN1138A43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LC	ej	XC6112D543MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LD	-	LN1138A44AKR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LD	-	LN1138A44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LD	ej	XC6112D544MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LE	-	LN1138A45AKR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LE	-	LN1138A45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LE	ej	XC6112D545MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LF	-	LN1138A46AKR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LF	-	LN1138A46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LF	ec	XC6112D516MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LF	ej	XC6112D546MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LH	-	LN1138A47AKR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LH	-	LN1138A47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LH	ec	XC6112D517MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LH	ej	XC6112D547MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LK	-	LN1138A48AKR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LK	-	LN1138A48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LK	ec	XC6112D518MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LK	ej	XC6112D548MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LL	-	LN1138A49AKR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LL	-	LN1138A49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LL	ec	XC6112D519MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LL	ej	XC6112D549MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LM	-	LN1138A50AKR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LM	-	LN1138A50AMR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LM	ec	XC6112D520MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LM	ej	XC6112D550MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LN	-	LN1138A51AKR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LN	-	LN1138A51AMR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LN	ec	XC6112D521MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LP	-	LN1138A52AKR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LP	-	LN1138A52AMR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LP	ec	XC6112D522MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LR	-	LN1138A53AKR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LR	-	LN1138A53AMR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LR	ec	XC6112D523MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LS	-	LN1138A54AKR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8LS	-	LN1138A54AMR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LS	ec	XC6112D524MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LT	-	LN1138A55AKR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LT	-	LN1138A55AMR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LT	ec	XC6112D525MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LU	-	LN1138A56AKR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LU	-	LN1138A56AMR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LU	ec	XC6112D526MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LV	-	LN1138A57AKR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LV	-	LN1138A57AMR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LV	ec	XC6112D527MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LX	-	LN1138A58AKR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LX	-	LN1138A58AMR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LX	ec	XC6112D528MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LY	-	LN1138A59AKR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8LY	-	LN1138A59AMR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8LY	ec	XC6112D529MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8LZ	ec	XC6112D530MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8M	-	R3111N481C	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
8M0	-	LN1138B31AKR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8M0	-	LN1138B31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8M0	ej	XC6112D631MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8M1	-	LN1138B32AKR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8M1	-	LN1138B32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8M1	ej	XC6112D632MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8M2	-	LN1138B33AKR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8M2	-	LN1138B33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8M2	ej	XC6112D633MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8M3	-	LN1138B34AKR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8M3	-	LN1138B34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8M3	ej	XC6112D634MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8M4	-	LN1138B35AKR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8M4	-	LN1138B35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8M4	ej	XC6112D635MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8M5	-	LN1138B36AKR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8M5	-	LN1138B36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8M5	ej	XC6112D636MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8M6	-	LN1138B37AKR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8M6	-	LN1138B37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8M6	ej	XC6112D637MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8M7	-	LN1138B38AKR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8M7	-	LN1138B38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8M7	ej	XC6112D638MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8M8	-	LN1138B39AKR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8M8	-	LN1138B39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8M8	ej	XC6112D639MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8M9	-	LN1138B40AKR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8M9	-	LN1138B40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8M9	ej	XC6112D640MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MA	-	LN1138B41AKR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MA	-	LN1138B41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8MA	ej	XC6112D641MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MB	-	LN1138B42AKR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MB	-	LN1138B42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8MB	ej	XC6112D642MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MC	-	LN1138B43AKR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MC	-	LN1138B43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8MC	ej	XC6112D643MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MD	-	LN1138B44AKR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MD	-	LN1138B44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8MD	ej	XC6112D644MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8ME	-	LN1138B45AKR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8ME	-	LN1138B45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8ME	ej	XC6112D645MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MF	-	LN1138B46AKR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MF	-	LN1138B46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8MF	ec	XC6112D616MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MF	ej	XC6112D646MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MH	-	LN1138B47AKR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MH	-	LN1138B47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8MH	ec	XC6112D617MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MH	ej	XC6112D647MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MK	-	LN1138B48AKR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MK	-	LN1138B48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8MK	ec	XC6112D618MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MK	ej	XC6112D648MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8ML	-	LN1138B49AKR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8ML	-	LN1138B49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8ML	ec	XC6112D619MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8ML	ej	XC6112D649MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MM	-	LN1138B50AKR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MM	-	LN1138B50AMR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8MM	ec	XC6112D620MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MM	ej	XC6112D650MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MN	-	LN1138B51AKR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MN	-	LN1138B51AMR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8MN	ec	XC6112D621MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MP	-	LN1138B52AKR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MP	-	LN1138B52AMR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8MP	ec	XC6112D622MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MR	-	LN1138B53AKR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MR	-	LN1138B53AMR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8MR	ec	XC6112D623MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MS	-	LN1138B54AKR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MS	-	LN1138B54AMR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8MS	ec	XC6112D624MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MT	-	LN1138B55AKR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MT	-	LN1138B55AMR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8MT	ec	XC6112D625MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MU	-	LN1138B56AKR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MU	-	LN1138B56AMR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8MU	ec	XC6112D626MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MV	-	LN1138B57AKR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MV	-	LN1138B57AMR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8MV	ec	XC6112D627MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MX	-	LN1138B58AKR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MX	-	LN1138B58AMR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8MX	ec	XC6112D628MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MY	-	LN1138B59AKR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8MY	-	LN1138B59AMR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8MY	ec	XC6112D629MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8MZ	ec	XC6112D630MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD16	6g	Tor
8N	-	R3111N581C	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
8N0	-	LN1138C31AKR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8N0	-	LN1138C31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8N1	-	LN1138C32AKR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8N1	-	LN1138C32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8N2	-	LN1138C33AKR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8N2	-	LN1138C33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8N3	-	LN1138C34AKR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8N3	-	LN1138C34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8N4	-	LN1138C35AKR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8N4	-	LN1138C35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8N5	-	LN1138C36AKR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8N5	-	LN1138C36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8N6	-	LN1138C37AKR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8N6	-	LN1138C37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8N7	-	LN1138C38AKR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8N7	-	LN1138C38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8N8	-	LN1138C39AKR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8N8	-	LN1138C39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8N9	-	LN1138C40AKR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8N9	-	LN1138C40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NA	-	LN1138C41AKR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NA	-	LN1138C41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NB	-	LN1138C42AKR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NB	-	LN1138C42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NC	-	LN1138C43AKR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NC	-	LN1138C43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8ND	-	LN1138C44AKR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8ND	-	LN1138C44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NE	-	LN1138C45AKR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NE	-	LN1138C45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NF	-	LN1138C46AKR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NF	-	LN1138C46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NH	-	LN1138C47AKR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NH	-	LN1138C47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NK	-	LN1138C48AKR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NK	-	LN1138C48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NL	-	LN1138C49AKR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NL	-	LN1138C49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NM	-	LN1138C50AKR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NM	-	LN1138C50AMR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NN	-	LN1138C51AKR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NN	-	LN1138C51AMR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NP	-	LN1138C52AKR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NP	-	LN1138C52AMR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NR	-	LN1138C53AKR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NR	-	LN1138C53AMR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NS	-	LN1138C54AKR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NS	-	LN1138C54AMR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NT	-	LN1138C55AKR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NT	-	LN1138C55AMR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NU	-	LN1138C56AKR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NU	-	LN1138C56AMR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NV	-	LN1138C57AKR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NV	-	LN1138C57AMR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NX	-	LN1138C58AKR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NX	-	LN1138C58AMR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8NY	-	LN1138C59AKR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8NY	-	LN1138C59AMR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8P0	-	LN1138D31AKR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8P0	-	LN1138D31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8P0	ej	XC6112E431MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8P1	-	LN1138D32AKR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8P1	-	LN1138D32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8P1	ej	XC6112E432MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8P2	-	LN1138D33AKR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8P2	-	LN1138D33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8P2	ej	XC6112E433MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8P3	-	LN1138D34AKR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8P3	-	LN1138D34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8P3	ej	XC6112E434MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8P4	-	LN1138D35AKR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8P4	-	LN1138D35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8P4	ej	XC6112E435MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8P5	-	LN1138D36AKR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8P5	-	LN1138D36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8P5	ej	XC6112E436MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8P6	-	LN1138D37AKR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8P6	-	LN1138D37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8P6	ej	XC6112E437MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8P7	-	LN1138D38AKR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8P7	-	LN1138D38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8P7	ej	XC6112E438MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8P8	-	LN1138D39AKR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8P8	-	LN1138D39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8P8	ej	XC6112E439MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8P9	-	LN1138D40AKR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8P9	-	LN1138D40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8P9	ej	XC6112E440MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PA	-	LN1138D41AKR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PA	-	LN1138D41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PA	ej	XC6112E441MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PB	-	LN1138D42AKR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PB	-	LN1138D42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PB	ej	XC6112E442MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PC	-	LN1138D43AKR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PC	-	LN1138D43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PC	ej	XC6112E443MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8PD	-	LN1138D44AKR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PD	-	LN1138D44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PD	ej	XC6112E444MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PE	-	LN1138D45AKR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PE	-	LN1138D45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PE	ej	XC6112E445MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PF	-	LN1138D46AKR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PF	-	LN1138D46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PF	ec	XC6112E416MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PF	ej	XC6112E446MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PH	-	LN1138D47AKR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PH	-	LN1138D47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PH	ec	XC6112E417MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PH	ej	XC6112E447MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PK	-	LN1138D48AKR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PK	-	LN1138D48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PK	ec	XC6112E418MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PK	ej	XC6112E448MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PL	-	LN1138D49AKR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PL	-	LN1138D49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PL	ec	XC6112E419MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PL	ej	XC6112E449MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PM	-	LN1138D50AKR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PM	-	LN1138D50AMR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PM	ec	XC6112E420MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PM	ej	XC6112E450MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PN	-	LN1138D51AKR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PN	-	LN1138D51AMR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PN	ec	XC6112E421MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PP	-	LN1138D52AKR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PP	-	LN1138D52AMR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PP	ec	XC6112E422MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PR	-	LN1138D53AKR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PR	-	LN1138D53AMR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PR	ec	XC6112E423MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PS	-	LN1138D54AKR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PS	-	LN1138D54AMR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PS	ec	XC6112E424MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PT	-	LN1138D55AKR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PT	-	LN1138D55AMR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PT	ec	XC6112E425MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PU	-	LN1138D56AKR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PU	-	LN1138D56AMR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PU	ec	XC6112E426MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PV	-	LN1138D57AKR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PV	-	LN1138D57AMR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PV	ec	XC6112E427MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PX	-	LN1138D58AKR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PX	-	LN1138D58AMR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PX	ec	XC6112E428MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PY	-	LN1138D59AKR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	Nln
8PY	-	LN1138D59AMR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Nln
8PY	ec	XC6112E429MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8PZ	ec	XC6112E430MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8Q	-	R1210N281A	DC-DC-IC	PWM step-up, 2.8V, 35..100kHz	SOT-23-5	28sc	DC3	6g	Ric
8R0	ej	XC6112E531MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8R1	ej	XC6112E532MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8R2	ej	XC6112E533MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8R3	ej	XC6112E534MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8R4	ej	XC6112E535MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8R5	ej	XC6112E536MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8R6	ej	XC6112E537MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8R7	ej	XC6112E538MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8R8	ej	XC6112E539MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8R9	ej	XC6112E540MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RA	ej	XC6112E541MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RB	ej	XC6112E542MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RC	ej	XC6112E543MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RD	ej	XC6112E544MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RE	ej	XC6112E545MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8RF	ec	XC6112E516MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RF	ej	XC6112E546MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RH	ec	XC6112E517MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RH	ej	XC6112E547MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RK	ec	XC6112E518MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RK	ej	XC6112E548MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RL	ec	XC6112E519MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RL	ej	XC6112E549MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RM	ec	XC6112E520MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RM	ej	XC6112E550MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RN	ec	XC6112E521MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RP	ec	XC6112E522MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RR	ec	XC6112E523MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RS	ec	XC6112E524MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RT	ec	XC6112E525MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RU	ec	XC6112E526MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RV	ec	XC6112E527MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RX	ec	XC6112E528MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RY	ec	XC6112E529MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8RZ	ec	XC6112E530MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8S	-	RN5RF18AA	LVR-IC	LRip, -CE, 1.8V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
8S0	ej	XC6112E631MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8S00	-	NC7ST00M5	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6a	F
8S02	-	NC7ST02M5	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6a	F
8S04	-	NC7ST04M5	CMOS-Log	Inverter	SOT-23-5	28	Log6	6a	F
8S08	-	NC7ST08M5	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6a	F
8S1	ej	XC6112E632MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8S14	-	NC7ST14M5	CMOS-Log	Inverting Schmitt-trigger	SC-59-5	28	Log7	6a	F
8S2	ej	XC6112E633MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8S3	ej	XC6112E634MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8S32	-	NC7ST32M5	CMOS-Log	2-input OR gate	SOT-23-5	28	Log4	6a	F
8S4	ej	XC6112E635MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8S5	ej	XC6112E636MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8S6	ej	XC6112E637MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8S7	ej	XC6112E638MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8S8	ej	XC6112E639MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8S86	-	NC7ST86M5	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-23-5	28	Log5	6a	F
8S9	ej	XC6112E640MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SA	ej	XC6112E641MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SB	ej	XC6112E642MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SC	ej	XC6112E643MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SD	ej	XC6112E644MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SE	ej	XC6112E645MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SF	ec	XC6112E616MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SF	ej	XC6112E646MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SH	ec	XC6112E617MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SH	ej	XC6112E647MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SK	ec	XC6112E618MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SK	ej	XC6112E648MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SL	ec	XC6112E619MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SL	ej	XC6112E649MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SM	ec	XC6112E620MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SM	ej	XC6112E650MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SN	ec	XC6112E621MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SP	ec	XC6112E622MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SR	ec	XC6112E623MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SS	ec	XC6112E624MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8ST	ec	XC6112E625MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SU	ec	XC6112E626MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SV	ec	XC6112E627MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SX	ec	XC6112E628MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SY	ec	XC6112E629MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8SZ	ec	XC6112E630MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD16	6g	Tor
8T	-	RN5RF18BA	LVR-IC	LRip, +CE, 1.8V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
8T0	ej	XC6112F531MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8T1	ej	XC6112F532MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8T2	ej	XC6112F533MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8T3	ej	XC6112F534MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8T4	ej	XC6112F535MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8T5	ej	XC6112F536MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8T6	ej	XC6112F537MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8T7	ej	XC6112F538MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8T8	ej	XC6112F539MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8T9	ej	XC6112F540MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TA	ej	XC6112F541MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TB	ej	XC6112F542MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TC	ej	XC6112F543MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TD	ej	XC6112F544MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TE	ej	XC6112F545MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TF	ec	XC6112F516MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TF	ej	XC6112F546MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TH	ec	XC6112F517MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TH	ej	XC6112F547MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TK	ec	XC6112F518MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TK	ej	XC6112F548MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TL	ec	XC6112F519MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TL	ej	XC6112F549MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TM	ec	XC6112F520MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TM	ej	XC6112F550MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TN	ec	XC6112F521MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TP	ec	XC6112F522MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TR	ec	XC6112F523MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TS	ec	XC6112F524MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TT	ec	XC6112F525MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TU	ec	XC6112F526MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TV	ec	XC6112F527MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TX	ec	XC6112F528MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TY	ec	XC6112F529MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8TZ	ec	XC6112F530MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8U	-	R1210N281C	DC-DC-IC	PWM step-up, 2.8V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
8U0	ej	XC6112F631MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8U1	ej	XC6112F632MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8U2	ej	XC6112F633MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8U3	ej	XC6112F634MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8U4	ej	XC6112F635MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8U5	ej	XC6112F636MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8U6	ej	XC6112F637MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8U7	ej	XC6112F638MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8U8	ej	XC6112F639MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8U9	ej	XC6112F640MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UA	ej	XC6112F641MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UB	ej	XC6112F642MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UC	ej	XC6112F643MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UD	ej	XC6112F644MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UE	ej	XC6112F645MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UF	ec	XC6112F616MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UF	ej	XC6112F646MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UH	ec	XC6112F617MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UH	ej	XC6112F647MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UK	ec	XC6112F618MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UK	ej	XC6112F648MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UL	ec	XC6112F619MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UL	ej	XC6112F649MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UM	ec	XC6112F620MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UM	ej	XC6112F650MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UN	ec	XC6112F621MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UP	ec	XC6112F622MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UR	ec	XC6112F623MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8US	ec	XC6112F624MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UT	ec	XC6112F625MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UU	ec	XC6112F626MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UV	ec	XC6112F627MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UX	ec	XC6112F628MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UY	ec	XC6112F629MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8UZ	ec	XC6112F630MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD16	6g	Tor
8V0	ej	XC6112H631MR	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8V1	ej	XC6112H632MR	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8V2	ej	XC6112H633MR	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8V3	ej	XC6112H634MR	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8V4	ej	XC6112H635MR	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8V5	ej	XC6112H636MR	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8V6	ej	XC6112H637MR	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8V7	ej	XC6112H638MR	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8V8	ej	XC6112H639MR	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8V9	-	LN1138A102KR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8V9	-	LN1138A102MR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8V9	ej	XC6112H640MR	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VA	-	LN1138A112KR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VA	-	LN1138A112MR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VA	ej	XC6112H641MR	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VB	-	LN1138A122KR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VB	-	LN1138A122MR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VB	ej	XC6112H642MR	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VC	-	LN1138A132KR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VC	-	LN1138A132MR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VC	ej	XC6112H643MR	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VD	-	LN1138A142KR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VD	-	LN1138A142MR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VD	ej	XC6112H644MR	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VE	-	LN1138A152KR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VE	-	LN1138A152MR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VE	ej	XC6112H645MR	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VF	-	LN1138A162KR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VF	-	LN1138A162MR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VF	ec	XC6112H616MR	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VF	ej	XC6112H646MR	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VH	-	LN1138A172KR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VH	-	LN1138A172MR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VH	ec	XC6112H617MR	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VH	ej	XC6112H647MR	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VK	-	LN1138A182KR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VK	-	LN1138A182MR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VK	ec	XC6112H618MR	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VK	ej	XC6112H648MR	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VL	-	LN1138A192KR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VL	-	LN1138A192MR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VL	ec	XC6112H619MR	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VL	ej	XC6112H649MR	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VM	-	LN1138A202KR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VM	-	LN1138A202MR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VM	ec	XC6112H620MR	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VM	ej	XC6112H650MR	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VN	-	LN1138A212KR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VN	-	LN1138A212MR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VN	ec	XC6112H621MR	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VP	-	LN1138A222KR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VP	-	LN1138A222MR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VP	ec	XC6112H622MR	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VR	-	LN1138A232KR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VR	-	LN1138A232MR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VR	ec	XC6112H623MR	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VS	-	LN1138A242KR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VS	-	LN1138A242MR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VS	ec	XC6112H624MR	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VT	-	LN1138A252KR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VT	-	LN1138A252MR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VT	ec	XC6112H625MR	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VU	-	LN1138A262KR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VU	-	LN1138A262MR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VU	ec	XC6112H626MR	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VV	-	LN1138A272KR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VV	-	LN1138A272MR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VV	ec	XC6112H627MR	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VX	-	LN1138A282KR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VX	-	LN1138A282MR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VX	ec	XC6112H628MR	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VY	-	LN1138A292KR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln
8VY	-	LN1138A292MR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VY	ec	XC6112H629MR	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8VZ	-	LN1138A302KR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR	SOT-353	28cx	VR4	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8VZ	-	LN1138A302MR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Nln
8VZ	ec	XC6112H630MR	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD16	6g	Tor
8W	-	R1210N381C	DC-DC-IC	PWM step-up, 3.8V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
8X	-	R1210N481C	DC-DC-IC	PWM step-up, 4.8V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
8X9	-	LN1138B102KR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8X9	-	LN1138B102MR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XA	-	LN1138B112KR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XA	-	LN1138B112MR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XB	-	LN1138B122KR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XB	-	LN1138B122MR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XC	-	LN1138B132KR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XC	-	LN1138B132MR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XD	-	LN1138B142KR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XD	-	LN1138B142MR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XE	-	LN1138B152KR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XE	-	LN1138B152MR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XF	-	LN1138B162KR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XF	-	LN1138B162MR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XH	-	LN1138B172KR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XH	-	LN1138B172MR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XK	-	LN1138B182KR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XK	-	LN1138B182MR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XL	-	LN1138B192KR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XL	-	LN1138B192MR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XM	-	LN1138B202KR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XM	-	LN1138B202MR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XN	-	LN1138B212KR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XN	-	LN1138B212MR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XP	-	LN1138B222KR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XP	-	LN1138B222MR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XR	-	LN1138B232KR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XR	-	LN1138B232MR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XS	-	LN1138B242KR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XS	-	LN1138B242MR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XT	-	LN1138B252KR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XT	-	LN1138B252MR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XU	-	LN1138B262KR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XU	-	LN1138B262MR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XV	-	LN1138B272KR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XV	-	LN1138B272MR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XX	-	LN1138B282KR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XX	-	LN1138B282MR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XY	-	LN1138B292KR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XY	-	LN1138B292MR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8XZ	-	LN1138B302KR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6g	Nln
8XZ	-	LN1138B302MR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Nln
8Y	-	R1210N581C	DC-DC-IC	PWM step-up, 5.8V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
8Y9	-	LN1138C102KR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8Y9	-	LN1138C102MR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8YA	-	LN1138C112KR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8YA	-	LN1138C112MR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8YB	-	LN1138C122KR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8YB	-	LN1138C122MR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8YC	-	LN1138C132KR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8YC	-	LN1138C132MR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8YD	-	LN1138C142KR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8YD	-	LN1138C142MR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8YE	-	LN1138C152KR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8YE	-	LN1138C152MR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8YF	-	LN1138C162KR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8YF	-	LN1138C162MR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8YH	-	LN1138C172KR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8YH	-	LN1138C172MR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8YK	-	LN1138C182KR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8YK	-	LN1138C182MR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8YL	-	LN1138C192KR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8YL	-	LN1138C192MR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8YM	-	LN1138C202KR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln
8YM	-	LN1138C202MR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	Nln
8YN	-	LN1138C212KR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	Nln





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8YN	-	LN1138C212MR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	NIn
8YP	-	LN1138C222KR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	NIn
8YP	-	LN1138C222MR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	NIn
8YR	-	LN1138C232KR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	NIn
8YR	-	LN1138C232MR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	NIn
8YS	-	LN1138C242KR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	NIn
8YS	-	LN1138C242MR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	NIn
8YT	-	LN1138C252KR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	NIn
8YT	-	LN1138C252MR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	NIn
8YU	-	LN1138C262KR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	NIn
8YU	-	LN1138C262MR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	NIn
8YV	-	LN1138C272KR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	NIn
8YV	-	LN1138C272MR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	NIn
8YX	-	LN1138C282KR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	NIn
8YX	-	LN1138C282MR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	NIn
8YY	-	LN1138C292KR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	NIn
8YY	-	LN1138C292MR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	NIn
8YZ	-	LN1138C302KR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR	SOT-353	28cx	VR4	6g	NIn
8YZ	-	LN1138C302MR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR	SOT-23-5	28cx	VR4	6g	NIn
8Z	-	R1210N281D	DC-DC-IC	PWM step-up, 2.8V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
8Z9	-	LN1138D102KR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8Z9	-	LN1138D102MR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZA	-	LN1138D112KR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZA	-	LN1138D112MR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZB	-	LN1138D122KR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZB	-	LN1138D122MR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZC	-	LN1138D132KR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZC	-	LN1138D132MR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZD	-	LN1138D142KR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZD	-	LN1138D142MR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZE	-	LN1138D152KR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZE	-	LN1138D152MR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZF	-	LN1138D162KR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZF	-	LN1138D162MR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZH	-	LN1138D172KR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZH	-	LN1138D172MR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZK	-	LN1138D182KR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZK	-	LN1138D182MR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZL	-	LN1138D192KR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZL	-	LN1138D192MR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZM	-	LN1138D202KR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZM	-	LN1138D202MR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZN	-	LN1138D212KR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZN	-	LN1138D212MR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZP	-	LN1138D222KR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZP	-	LN1138D222MR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZR	-	LN1138D232KR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZR	-	LN1138D232MR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZS	-	LN1138D242KR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZS	-	LN1138D242MR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZT	-	LN1138D252KR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZT	-	LN1138D252MR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZU	-	LN1138D262KR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZU	-	LN1138D262MR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZV	-	LN1138D272KR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZV	-	LN1138D272MR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZX	-	LN1138D282KR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZX	-	LN1138D282MR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZY	-	LN1138D292KR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZY	-	LN1138D292MR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
8ZZ	-	LN1138D302KR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SOT-353	28cx	VR4	6g	NIn
8ZZ	-	LN1138D302MR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	NIn
90	-	RN5RF40BA	LVR-IC	LRip, +CE, 4V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
90	-	RN5RZ40BA	LVR-IC	LDO, LN, 4V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
900	ej	XC6113A131MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
901	ej	XC6113A132MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
902	-	XC6223G121MR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
902	ej	XC6113A133MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
903	-	XC6223G131MR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
903	ej	XC6113A134MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
904	-	XC6223G141MR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
904	ej	XC6113A135MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
905	-	XC6223G151MR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
905	ej	XC6113A136MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
906	-	XC6223G161MR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
906	ej	XC6113A137MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
907	-	XC6223G171MR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
907	ej	XC6113A138MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
908	-	XC6223G181MR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
908	ej	XC6113A139MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
909	-	XC6223G191MR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
909	ej	XC6113A140MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90A	-	RP104N121B	LVR-IC	LDO, 1.2V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90A	-	XC6223G201MR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90A	ej	XC6113A141MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90B	-	RP104N131B	LVR-IC	LDO, 1.3V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90B	-	XC6223G211MR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90B	ej	XC6113A142MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90C	-	RP104N151B	LVR-IC	LDO, 1.5V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90C	-	XC6223G221MR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90C	ej	XC6113A143MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90D	-	RP104N181B	LVR-IC	LDO, 1.8V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90D	-	XC6223G231MR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90D	ej	XC6113A144MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90E	-	RP104N181B5	LVR-IC	LDO, 1.85V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90E	-	XC6223G241MR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90E	ej	XC6113A145MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90F	-	RP104N191B	LVR-IC	LDO, 1.9V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90F	-	XC6223G251MR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90F	ec	XC6113A116MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90F	ej	XC6113A146MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90G	-	RP104N201B	LVR-IC	LDO, 2.0V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90H	-	RP104N251B	LVR-IC	LDO, 2.5V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90H	-	XC6223G261MR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90H	ec	XC6113A117MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90H	ej	XC6113A147MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90J	-	RP104N261B	LVR-IC	LDO, 2.6V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90K	-	RP104N271B	LVR-IC	LDO, 2.7V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90K	-	XC6223G271MR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90K	ec	XC6113A118MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90K	ej	XC6113A148MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90L	-	RP104N281B	LVR-IC	LDO, 2.8V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90L	-	XC6223G281MR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90L	ec	XC6113A119MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90L	ej	XC6113A149MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90M	-	RP104N281B5	LVR-IC	LDO, 2.85V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90M	-	XC6223G291MR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90M	ec	XC6113A120MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90M	ej	XC6113A150MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90N	-	RP104N291B	LVR-IC	LDO, 2.9V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90N	-	XC6223G301MR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90N	ec	XC6113A121MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90P	-	RP104N301B	LVR-IC	LDO, 3.0V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90P	-	XC6223G311MR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90P	ec	XC6113A122MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90Q	-	RP104N321B	LVR-IC	LDO, 3.2V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90R	-	RP104N331B	LVR-IC	LDO, 3.3V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90R	-	XC6223G321MR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90R	ec	XC6113A123MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90S	-	RP104N311B	LVR-IC	LDO, 3.1V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90S	-	XC6223G331MR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90S	ec	XC6113A124MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90T	-	RP104N241B	LVR-IC	LDO, 2.4V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90T	-	XC6223G341MR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90T	ec	XC6113A125MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90U	-	RP104N221B	LVR-IC	LDO, 2.2V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90U	-	XC6223G351MR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90U	ec	XC6113A126MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90V	-	RP104N231B	LVR-IC	LDO, 2.3V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90V	-	XC6223G361MR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
90V	ec	XC6113A127MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90W	-	RP104N271B5	LVR-IC	LDO, 2.75V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90X	-	RP104N211B	LVR-IC	LDO, 2.1V±0.8%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
90X	-	XC6223G371MR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90X	ec	XC6113A128MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90Y	-	XC6223G381MR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90Y	ec	XC6113A129MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
90Z	-	XC6223G391MR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
90Z	ec	XC6113A130MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91	-	RN5RF41BA	LVR-IC	LRip, +CE, 4.1V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
91	-	RN5RZ41BA	LVR-IC	LDO, LN, 4.1V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
910	-	XC6223G401MR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
910	ej	XC6113A231MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
911	ej	XC6113A232MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
912	ej	XC6113A233MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
913	ej	XC6113A234MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
914	ej	XC6113A235MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
914Ax	-	G9184-080T11U	LVR-IC	LDO, 0.8V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Gmt
914Bx	-	G9184-100T11U	LVR-IC	LDO, 1.0V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Gmt
914Cx	-	G9184-105T11U	LVR-IC	LDO, 1.05V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Gmt
914Dx	-	G9184-120T11U	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Gmt
914Ex	-	G9184-150T11U	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Gmt
914Fx	-	G9184-160T11U	LVR-IC	LDO, 1.6V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Gmt
914Gx	-	G9184-180T11U	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Gmt
914Hx	-	G9184-135T11U	LVR-IC	LDO, 1.35V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Gmt
915	-	R1124N151D	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
915	ej	XC6113A236MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
916	-	R1124N161D	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
916	ej	XC6113A237MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
917	-	R1124N171D	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
917	ej	XC6113A238MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
918	-	R1124N181D	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
918	ej	XC6113A239MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
919	-	R1124N191D	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
919	ej	XC6113A240MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91A	-	RP104N121C	LVR-IC	LDO, 1.2V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91A	ej	XC6113A241MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91B	-	RP104N131C	LVR-IC	LDO, 1.3V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91B	ej	XC6113A242MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91C	-	RP104N151C	LVR-IC	LDO, 1.5V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91C	ej	XC6113A243MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91D	-	RP104N181C	LVR-IC	LDO, 1.8V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91D	ej	XC6113A244MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91E	-	RP104N181C5	LVR-IC	LDO, 1.85V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91E	ej	XC6113A245MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91F	-	RP104N191C	LVR-IC	LDO, 1.9V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91F	ec	XC6113A216MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91F	ej	XC6113A246MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91G	-	RP104N201C	LVR-IC	LDO, 2.0V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91H	-	RP104N251C	LVR-IC	LDO, 2.5V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91H	ec	XC6113A217MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91H	ej	XC6113A247MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91J	-	RP104N261C	LVR-IC	LDO, 2.6V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91K	-	RP104N271C	LVR-IC	LDO, 2.7V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91K	ec	XC6113A218MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91K	ej	XC6113A248MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91L	-	RP104N281C	LVR-IC	LDO, 2.8V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91L	ec	XC6113A219MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91L	ej	XC6113A249MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91M	-	RP104N281C5	LVR-IC	LDO, 2.85V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91M	ec	XC6113A220MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91M	ej	XC6113A250MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91N	-	RP104N291C	LVR-IC	LDO, 2.9V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91N	ec	XC6113A221MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91P	-	RP104N301C	LVR-IC	LDO, 3.0V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91P	ec	XC6113A222MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91Q	-	RP104N321C	LVR-IC	LDO, 3.2V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91R	-	RP104N331C	LVR-IC	LDO, 3.3V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91R	ec	XC6113A223MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91S	-	RP104N311C	LVR-IC	LDO, 3.1V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
91S	ec	XC6113A224MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91T	-	RP104N241C	LVR-IC	LDO, 2.4V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91T	ec	XC6113A225MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91U	-	RP104N221C	LVR-IC	LDO, 2.2V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91U	ec	XC6113A226MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91V	-	RP104N231C	LVR-IC	LDO, 2.3V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91V	ec	XC6113A227MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91W	-	RP104N271C5	LVR-IC	LDO, 2.75V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91X	-	RP104N211C	LVR-IC	LDO, 2.1V±0.8%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
91X	ec	XC6113A228MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91Y	ec	XC6113A229MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
91Z	ec	XC6113A230MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92	-	RN5RF42BA	LVR-IC	LRip, +CE, 4.2V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
92	-	RN5RZ42BA	LVR-IC	LDO, LN, 4.2V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
920	-	R1124N201D	LVR-IC	LDO, Low noise, 2V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
920	ej	XC6113A331MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
921	-	R1124N211D	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
921	ej	XC6113A332MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
922	-	R1124N221D	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
922	-	XC6223G12BMR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
922	ej	XC6113A333MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
923	-	R1124N231D	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
923	-	XC6223G13BMR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
923	ej	XC6113A334MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
924	-	R1124N241D	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
924	-	XC6223G14BMR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
924	ej	XC6113A335MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
925	-	R1124N251D	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
925	-	XC6223G15BMR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
925	ej	XC6113A336MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
926	-	R1124N261D	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
926	-	XC6223G16BMR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
926	ej	XC6113A337MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
927	-	R1124N271D	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
927	-	XC6223G17BMR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
927	ej	XC6113A338MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
928	-	R1124N281D	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
928	-	XC6223G18BMR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
928	ej	XC6113A339MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
929	-	R1124N291D	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
929	-	XC6223G19BMR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
929	ej	XC6113A340MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92A	-	RP104N121D	LVR-IC	LDO, 1.2V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92A	-	XC6223G20BMR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92A	ej	XC6113A341MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92B	-	RP104N131D	LVR-IC	LDO, 1.3V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92B	-	XC6223G21BMR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92B	ej	XC6113A342MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92C	-	RP104N151D	LVR-IC	LDO, 1.5V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92C	-	XC6223G22BMR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92C	ej	XC6113A343MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92D	-	RP104N181D	LVR-IC	LDO, 1.8V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92D	-	XC6223G23BMR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92D	ej	XC6113A344MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92E	-	RP104N181D5	LVR-IC	LDO, 1.85V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92E	-	XC6223G24BMR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92E	ej	XC6113A345MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92F	-	RP104N191D	LVR-IC	LDO, 1.9V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92F	-	XC6223G25BMR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92F	ec	XC6113A316MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92F	ej	XC6113A346MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92G	-	RP104N201D	LVR-IC	LDO, 2.0V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92H	-	RP104N251D	LVR-IC	LDO, 2.5V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92H	-	XC6223G26BMR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92H	ec	XC6113A317MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92H	ej	XC6113A347MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92J	-	RP104N261D	LVR-IC	LDO, 2.6V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92K	-	RP104N271D	LVR-IC	LDO, 2.7V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92K	-	XC6223G27BMR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92K	ec	XC6113A318MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
92K	ej	XC6113A348MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92L	-	RP104N281D	LVR-IC	LDO, 2.8V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92L	-	XC6223G28BMR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92L	ec	XC6113A319MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92L	ej	XC6113A349MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92M	-	RP104N281D5	LVR-IC	LDO, 2.85V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92M	-	XC6223G29BMR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92M	ec	XC6113A320MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92M	ej	XC6113A350MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92N	-	RP104N291D	LVR-IC	LDO, 2.9V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92N	-	XC6223G30BMR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92N	ec	XC6113A321MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92P	-	RP104N301D	LVR-IC	LDO, 3.0V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92P	-	XC6223G31BMR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92P	ec	XC6113A322MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92Q	-	RP104N321D	LVR-IC	LDO, 3.2V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92R	-	RP104N331D	LVR-IC	LDO, 3.3V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92R	-	XC6223G32BMR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92R	ec	XC6113A323MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92S	-	RP104N311D	LVR-IC	LDO, 3.1V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92S	-	XC6223G33BMR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92S	ec	XC6113A324MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92T	-	RP104N241D	LVR-IC	LDO, 2.4V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92T	-	XC6223G34BMR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92T	ec	XC6113A325MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92U	-	RP104N221D	LVR-IC	LDO, 2.2V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92U	-	XC6223G35BMR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92U	ec	XC6113A326MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92V	-	RP104N231D	LVR-IC	LDO, 2.3V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92V	-	XC6223G36BMR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92V	ec	XC6113A327MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92W	-	RP104N271D5	LVR-IC	LDO, 2.75V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92X	-	RP104N211D	LVR-IC	LDO, 2.1V±0.8%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
92X	-	XC6223G37BMR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92X	ec	XC6113A328MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92Y	-	XC6223G38BMR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92Y	ec	XC6113A329MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
92Z	-	XC6223G39BMR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
92Z	ec	XC6113A330MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93	-	RN5RF43BA	LVR-IC	LRip, +CE, 4.3V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
93	-	RN5RZ43BA	LVR-IC	LDO, LN, 4.3V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
930	-	R1124N301D	LVR-IC	LDO, Low noise, 3V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
930	ej	XC6113A431MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
931	-	R1124N311D	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
931	ej	XC6113A432MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
932	-	R1124N321D	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
932	-	XC6223H121MR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
932	ej	XC6113A433MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
933	-	R1124N331D	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
933	-	XC6223H131MR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
933	ej	XC6113A434MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
934	-	R1124N341D	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
934	-	XC6223H141MR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
934	ej	XC6113A435MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
935	-	R1124N351D	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
935	-	XC6223H151MR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
935	ej	XC6113A436MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
936	-	R1124N361D	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
936	-	XC6223H161MR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
936	ej	XC6113A437MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
937	-	R1124N371D	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
937	-	XC6223H171MR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
937	ej	XC6113A438MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
938	-	R1124N381D	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
938	-	XC6223H181MR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
938	ej	XC6113A439MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
939	-	R1124N391D	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
939	-	XC6223H191MR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
939	ej	XC6113A440MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93A	-	XC6223H201MR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
93A	ej	XC6113A441MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93B	-	XC6223H211MR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93B	ej	XC6113A442MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93C	-	XC6223H221MR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93C	ej	XC6113A443MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93D	-	XC6223H231MR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93D	ej	XC6113A444MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93E	-	XC6223H241MR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93E	ej	XC6113A445MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93F	-	XC6223H251MR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93F	ec	XC6113A416MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93F	ej	XC6113A446MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93H	-	XC6223H261MR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93H	ec	XC6113A417MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93H	ej	XC6113A447MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93K	-	XC6223H271MR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93K	ec	XC6113A418MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93K	ej	XC6113A448MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93L	-	XC6223H281MR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93L	ec	XC6113A419MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93L	ej	XC6113A449MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93M	-	XC6223H291MR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93M	ec	XC6113A420MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93M	ej	XC6113A450MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93N	-	XC6223H301MR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93N	ec	XC6113A421MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93P	-	XC6223H311MR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93P	ec	XC6113A422MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93R	-	XC6223H321MR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93R	ec	XC6113A423MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93S	-	XC6223H331MR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93S	ec	XC6113A424MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93T	-	XC6223H341MR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93T	ec	XC6113A425MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93U	-	XC6223H351MR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93U	ec	XC6113A426MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93V	-	XC6223H361MR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93V	ec	XC6113A427MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93X	-	XC6223H371MR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93X	ec	XC6113A428MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93Y	-	XC6223H381MR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93Y	ec	XC6113A429MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
93Z	-	XC6223H391MR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
93Z	ec	XC6113A430MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94	-	RN5RF44BA	LVR-IC	LRip, +CE, 4.4V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
94	-	RN5RZ44BA	LVR-IC	LDO, LN, 4.4V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
940	-	R1124N401D	LVR-IC	LDO, Low noise, 4V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
940	-	XC6223H401MR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
940	ej	XC6113A531MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
941	-	R1124N281D5	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE, CL	SOT-23-5	28vt	VR4	6g	Ric
941	ej	XC6113A532MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
942	ej	XC6113A533MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
943	ej	XC6113A534MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
944	ej	XC6113A535MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
945	ej	XC6113A536MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
946	ej	XC6113A537MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
947	ej	XC6113A538MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
948	ej	XC6113A539MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
949	ej	XC6113A540MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94A	ej	XC6113A541MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94B	ej	XC6113A542MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94C	ej	XC6113A543MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94D	ej	XC6113A544MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94E	ej	XC6113A545MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94F	ec	XC6113A516MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94F	ej	XC6113A546MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94H	ec	XC6113A517MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94H	ej	XC6113A547MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94K	ec	XC6113A518MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94K	ej	XC6113A548MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
94L	ec	XC6113A519MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94L	ej	XC6113A549MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94M	ec	XC6113A520MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94M	ej	XC6113A550MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94N	ec	XC6113A521MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94P	ec	XC6113A522MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94R	ec	XC6113A523MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94S	ec	XC6113A524MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94T	ec	XC6113A525MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94U	ec	XC6113A526MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94V	ec	XC6113A527MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94X	ec	XC6113A528MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94Y	ec	XC6113A529MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
94Z	ec	XC6113A530MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95	-	RN5RF45BA	LVR-IC	LRip, +CE, 4.5V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
95	-	RN5RZ45BA	LVR-IC	LDO, LN, 4.5V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
950	-	LN1121P311KR	LVR-IC	LDO, 3.1V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
950	ej	XC6113A631MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
951	ej	XC6113A632MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
952	-	XC6223H12BMR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
952	ej	XC6113A633MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
953	-	XC6223H13BMR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
953	ej	XC6113A634MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
954	-	XC6223H14BMR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
954	ej	XC6113A635MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
955	-	XC6223H15BMR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
955	ej	XC6113A636MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
956	-	XC6223H16BMR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
956	ej	XC6113A637MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
957	-	XC6223H17BMR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
957	ej	XC6113A638MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
958	-	XC6223H18BMR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
958	ej	XC6113A639MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
959	-	XC6223H19BMR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
959	ej	XC6113A640MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95A	-	XC6223H20BMR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95A	ej	XC6113A641MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95B	-	LN1121P122KR	LVR-IC	LDO, 1.2V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95B	-	XC6223H21BMR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95B	ej	XC6113A642MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95C	-	LN1121P132KR	LVR-IC	LDO, 1.3V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95C	-	XC6223H22BMR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95C	ej	XC6113A643MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95D	-	LN1121P142KR	LVR-IC	LDO, 1.4V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95D	-	XC6223H23BMR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95D	ej	XC6113A644MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95E	-	LN1121P152KR	LVR-IC	LDO, 1.5V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95E	-	XC6223H24BMR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95E	ej	XC6113A645MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95F	-	XC6223H25BMR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95F	ec	XC6113A616MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95F	ej	XC6113A646MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95H	-	LN1121P172KR	LVR-IC	LDO, 1.7V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95H	-	XC6223H26BMR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95H	ec	XC6113A617MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95H	ej	XC6113A647MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95K	-	LN1121P182KR	LVR-IC	LDO, 1.8V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95K	-	XC6223H27BMR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95K	ec	XC6113A618MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95K	ej	XC6113A648MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95L	-	LN1121P192KR	LVR-IC	LDO, 1.9V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95L	-	XC6223H28BMR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95L	ec	XC6113A619MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95L	ej	XC6113A649MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95M	-	LN1121P202KR	LVR-IC	LDO, 2.0V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95M	-	XC6223H29BMR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95M	ec	XC6113A620MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95M	ej	XC6113A650MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95N	-	LN1121P212KR	LVR-IC	LDO, 2.1V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95N	-	XC6223H30BMR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
95N	ec	XC6113A621MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95P	-	LN1121P222KR	LVR-IC	LDO, 2.2V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95P	-	XC6223H31BMR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95P	ec	XC6113A622MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95R	-	LN1121P232KR	LVR-IC	LDO, 2.3V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95R	-	XC6223H32BMR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95R	ec	XC6113A623MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95S	-	LN1121P242KR	LVR-IC	LDO, 2.4V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95S	-	XC6223H33BMR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95S	ec	XC6113A624MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95T	-	LN1121P252KR	LVR-IC	LDO, 2.5V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95T	-	XC6223H34BMR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95T	ec	XC6113A625MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95U	-	LN1121P262KR	LVR-IC	LDO, 2.6V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95U	-	XC6223H35BMR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95U	ec	XC6113A626MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95V	-	LN1121P272KR	LVR-IC	LDO, 2.7V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95V	-	XC6223H36BMR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95V	ec	XC6113A627MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95X	-	LN1121P282KR	LVR-IC	LDO, 2.8V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95X	-	XC6223H37BMR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95X	ec	XC6113A628MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95Y	-	LN1121P292KR	LVR-IC	LDO, 2.9V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95Y	-	XC6223H38BMR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95Y	ec	XC6113A629MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
95Z	-	LN1121P302KR	LVR-IC	LDO, 3.0V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
95Z	-	XC6223H39BMR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL, PDR, ICP	SOT-25	28cx	VR4	6g	Tor
95Z	ec	XC6113A630MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28cp	VD17	6g	Tor
96	-	RN5RF46BA	LVR-IC	LRip, +CE, 4.6V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
96	-	RN5RZ46BA	LVR-IC	LDO, LN, 4.6V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
960	ej	XC6113B231MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
961	-	LN1121P322KR	LVR-IC	LDO, 3.2V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
961	ej	XC6113B232MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
962	-	LN1121P332KR	LVR-IC	LDO, 3.3V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
962	ej	XC6113B233MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
963	-	LN1121P342KR	LVR-IC	LDO, 3.4V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
963	ej	XC6113B234MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
964	-	LN1121P352KR	LVR-IC	LDO, 3.5V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
964	ej	XC6113B235MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
965	-	LN1121P362KR	LVR-IC	LDO, 3.6V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
965	ej	XC6113B236MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
966	-	LN1121P372KR	LVR-IC	LDO, 3.7V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
966	ej	XC6113B237MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
967	-	LN1121P382KR	LVR-IC	LDO, 3.8V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
967	ej	XC6113B238MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
968	-	LN1121P392KR	LVR-IC	LDO, 3.9V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
968	ej	XC6113B239MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
969	-	LN1121P402KR	LVR-IC	LDO, 4.0V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
969	ej	XC6113B240MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96A	-	LN1121P412KR	LVR-IC	LDO, 4.1V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
96A	ej	XC6113B241MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96B	-	LN1121P422KR	LVR-IC	LDO, 4.2V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
96B	ej	XC6113B242MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96C	-	LN1121P432KR	LVR-IC	LDO, 4.3V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
96C	ej	XC6113B243MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96D	-	LN1121P442KR	LVR-IC	LDO, 4.4V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
96D	ej	XC6113B244MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96E	-	LN1121P452KR	LVR-IC	LDO, 4.5V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
96E	ej	XC6113B245MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96F	ec	XC6113B216MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96F	ej	XC6113B246MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96G	-	LN1121P462KR	LVR-IC	LDO, 4.6V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
96H	-	LN1121P472KR	LVR-IC	LDO, 4.7V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
96H	ec	XC6113B217MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96H	ej	XC6113B247MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96K	-	LN1121P482KR	LVR-IC	LDO, 4.8V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
96K	ec	XC6113B218MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96K	ej	XC6113B248MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96L	-	LN1121P492KR	LVR-IC	LDO, 4.9V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
96L	ec	XC6113B219MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
96L	ej	XC6113B249MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96M	-	LN1121P502KR	LVR-IC	LDO, 5.0V±2%, 250mA	SC-70-5	28g	VR1	6g	Nln
96M	ec	XC6113B220MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96M	ej	XC6113B250MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96N	ec	XC6113B221MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96P	ec	XC6113B222MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96R	ec	XC6113B223MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96S	ec	XC6113B224MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96T	ec	XC6113B225MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96U	ec	XC6113B226MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96V	ec	XC6113B227MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96X	ec	XC6113B228MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96Y	ec	XC6113B229MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
96Z	ec	XC6113B230MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97	-	RN5RF47BA	LVR-IC	LRip, +CE, 4.7V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
97	-	RN5RZ47BA	LVR-IC	LDO, LN, 4.7V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
970	ej	XC6113B331MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
971	ej	XC6113B332MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
972	ej	XC6113B333MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
973	ej	XC6113B334MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
974	ej	XC6113B335MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
975	ej	XC6113B336MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
976	ej	XC6113B337MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
977	ej	XC6113B338MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
978	ej	XC6113B339MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
979	ej	XC6113B340MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97A	ej	XC6113B341MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97B	ej	XC6113B342MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97C	ej	XC6113B343MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97D	ej	XC6113B344MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97E	ej	XC6113B345MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97F	ec	XC6113B316MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97F	ej	XC6113B346MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97H	ec	XC6113B317MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97H	ej	XC6113B347MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97K	ec	XC6113B318MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97K	ej	XC6113B348MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97L	ec	XC6113B319MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97L	ej	XC6113B349MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97M	ec	XC6113B320MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97M	ej	XC6113B350MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97N	ec	XC6113B321MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97P	ec	XC6113B322MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97R	ec	XC6113B323MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97S	ec	XC6113B324MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97T	ec	XC6113B325MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97U	ec	XC6113B326MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97V	ec	XC6113B327MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97X	ec	XC6113B328MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97Y	ec	XC6113B329MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
97Z	ec	XC6113B330MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98	-	RN5RF48BA	LVR-IC	LRip, +CE, 4.8V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
98	-	RN5RZ48BA	LVR-IC	LDO, LN, 4.8V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
980	ej	XC6113B431MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
981	ej	XC6113B432MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
982	ej	XC6113B433MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
983	ej	XC6113B434MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
984	ej	XC6113B435MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
985	ej	XC6113B436MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
986	ej	XC6113B437MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
987	ej	XC6113B438MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
988	ej	XC6113B439MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
989	ej	XC6113B440MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98A	ej	XC6113B441MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98B	ej	XC6113B442MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98C	ej	XC6113B443MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98D	ej	XC6113B444MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98E	ej	XC6113B445MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98F	ec	XC6113B416MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98F	ej	XC6113B446MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
98H	ec	XC6113B417MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98H	ej	XC6113B447MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98K	ec	XC6113B418MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98K	ej	XC6113B448MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98L	ec	XC6113B419MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98L	ej	XC6113B449MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98M	ec	XC6113B420MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98M	ej	XC6113B450MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98N	ec	XC6113B421MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98P	ec	XC6113B422MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98R	ec	XC6113B423MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98S	ec	XC6113B424MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98T	ec	XC6113B425MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98U	ec	XC6113B426MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98V	ec	XC6113B427MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98X	ec	XC6113B428MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98Y	ec	XC6113B429MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
98Z	ec	XC6113B430MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99	-	RN5RF49BA	LVR-IC	LRip, +CE, 4.9V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
99	-	RN5RZ49BA	LVR-IC	LDO, LN, 4.9V±2%, 100mA, +CE	SOT-23-5	28vrt	VR4	6g	Ric
990	ej	XC6113B531MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
991	ej	XC6113B532MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
992	ej	XC6113B533MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
993	ej	XC6113B534MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
994	ej	XC6113B535MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
995	ej	XC6113B536MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
996	ej	XC6113B537MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
997	ej	XC6113B538MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
998	ej	XC6113B539MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
999	ej	XC6113B540MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99A	ej	XC6113B541MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99B	ej	XC6113B542MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99C	ej	XC6113B543MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99D	ej	XC6113B544MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99E	ej	XC6113B545MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99F	ec	XC6113B516MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99F	ej	XC6113B546MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99H	ec	XC6113B517MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99H	ej	XC6113B547MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99K	ec	XC6113B518MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99K	ej	XC6113B548MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99L	ec	XC6113B519MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99L	ej	XC6113B549MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99M	ec	XC6113B520MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99M	ej	XC6113B550MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99N	ec	XC6113B521MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99P	ec	XC6113B522MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99R	ec	XC6113B523MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99S	ec	XC6113B524MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99T	ec	XC6113B525MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99U	ec	XC6113B526MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99V	ec	XC6113B527MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99X	ec	XC6113B528MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99Y	ec	XC6113B529MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
99Z	ec	XC6113B530MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9A	-	R3111N091A	Vdet-IC	0.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
9A	eu	RN5VD09CA	Vdet-IC	0.9V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
9A0	-	XC6209A312MR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A0	-	XC6601A071MR	LVR-IC	0.7V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9A0	eg	XC6209E312MR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A0	eh	XC6212A312MR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9A0	ej	XC6113B631MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9A1	-	XC6209A322MR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A1	-	XC6504A111MR-G	LVR-IC	LDO, 1.1V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9A1	-	XC6601A07BMR	LVR-IC	0.75V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9A1	eg	XC6209E322MR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A1	eh	XC6212A322MR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9A1	ej	XC6113B632MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9A2	-	XC6209A332MR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A2	-	XC6504A121MR-G	LVR-IC	LDO, 1.2V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9A2	-	XC6601A081MR	LVR-IC	0.8V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9A2	eg	XC6209E332MR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A2	eh	XC6212A332MR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9A2	ej	XC6113B633MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9A3	-	XC6209A342MR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A3	-	XC6504A131MR-G	LVR-IC	LDO, 1.3V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9A3	-	XC6601A08BMR	LVR-IC	0.85V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9A3	eg	XC6209E342MR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A3	eh	XC6212A342MR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9A3	ej	XC6113B634MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9A4	-	XC6209A352MR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A4	-	XC6504A141MR-G	LVR-IC	LDO, 1.4V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9A4	-	XC6601A091MR	LVR-IC	0.9V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9A4	eg	XC6209E352MR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A4	eh	XC6212A352MR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9A4	ej	XC6113B635MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9A5	-	XC6209A362MR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A5	-	XC6504A151MR-G	LVR-IC	LDO, 1.5V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9A5	-	XC6601A09BMR	LVR-IC	0.95V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9A5	eg	XC6209E362MR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A5	eh	XC6212A362MR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9A5	ej	XC6113B636MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9A6	-	XC6209A372MR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A6	-	XC6504A161MR-G	LVR-IC	LDO, 1.6V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9A6	-	XC6601A101MR	LVR-IC	1.0V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9A6	eg	XC6209E372MR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A6	eh	XC6212A372MR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9A6	ej	XC6113B637MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9A7	-	XC6209A382MR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A7	-	XC6504A171MR-G	LVR-IC	LDO, 1.7V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9A7	-	XC6601A10BMR	LVR-IC	1.05V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9A7	eg	XC6209E382MR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A7	eh	XC6212A382MR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9A7	ej	XC6113B638MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9A8	-	XC6209A392MR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A8	-	XC6504A181MR-G	LVR-IC	LDO, 1.8V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9A8	-	XC6601A111MR	LVR-IC	1.1V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9A8	eg	XC6209E392MR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A8	eh	XC6212A392MR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9A8	ej	XC6113B639MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9A9	-	XC6209A402MR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A9	-	XC6504A191MR-G	LVR-IC	LDO, 1.9V±20mV, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9A9	-	XC6601A11BMR	LVR-IC	1.15V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9A9	eg	XC6209E402MR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9A9	eh	XC6212A402MR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9A9	ej	XC6113B640MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AA	-	XC6209A412MR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AA	-	XC6504A201MR-G	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AA	-	XC6601A121MR	LVR-IC	1.2V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9AA	eg	XC6209E412MR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AA	eh	XC6212A412MR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AA	ej	XC6113B641MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AB	-	XC6209A422MR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AB	-	XC6504A211MR-G	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AB	-	XC6601A12BMR	LVR-IC	1.25V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9AB	eg	XC6209E422MR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AB	eh	XC6212A422MR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AB	ej	XC6113B642MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AC	-	XC6209A432MR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AC	-	XC6504A221MR-G	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AC	-	XC6601A131MR	LVR-IC	1.3V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9AC	eg	XC6209E432MR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AC	eh	XC6212A432MR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AC	ej	XC6113B643MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AD	-	XC6209A442MR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AD	-	XC6504A231MR-G	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AD	-	XC6601A13BMR	LVR-IC	1.35V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9AD	eg	XC6209E442MR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AD	eh	XC6212A442MR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AD	ej	XC6113B644MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9AE	-	XC6209A452MR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AE	-	XC6504A241MR-G	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AE	-	XC6601A141MR	LVR-IC	1.4V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9AE	eg	XC6209E452MR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AE	eh	XC6212A452MR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AE	ej	XC6113B645MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AF	-	XC6209A462MR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AF	-	XC6504A251MR-G	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AF	-	XC6601A14BMR	LVR-IC	1.45V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9AF	ec	XC6113B616MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AF	eg	XC6209E462MR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AF	eh	XC6212A462MR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AF	ej	XC6113B646MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AH	-	XC6209A472MR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AH	-	XC6504A261MR-G	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AH	-	XC6601A151MR	LVR-IC	1.5V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9AH	ec	XC6113B617MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AH	eg	XC6209E472MR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AH	eh	XC6212A472MR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AH	ej	XC6113B647MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AK	-	XC6209A482MR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AK	-	XC6504A271MR-G	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AK	-	XC6601A15BMR	LVR-IC	1.55V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9AK	ec	XC6113B618MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AK	eg	XC6209E482MR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AK	eh	XC6212A482MR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AK	ej	XC6113B648MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AL	-	XC6209A492MR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AL	-	XC6504A281MR-G	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AL	-	XC6601A161MR	LVR-IC	1.6V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9AL	ec	XC6113B619MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AL	eg	XC6209E492MR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AL	eh	XC6212A492MR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AL	ej	XC6113B649MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AM	-	XC6209A502MR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AM	-	XC6504A291MR-G	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AM	-	XC6601A16BMR	LVR-IC	1.65V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9AM	ec	XC6113B620MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AM	eg	XC6209E502MR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AM	eh	XC6212A502MR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AM	ej	XC6113B650MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AN	-	XC6209A512MR	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AN	-	XC6504A301MR-G	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AN	-	XC6601A171MR	LVR-IC	1.7V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9AN	ec	XC6113B621MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AN	eg	XC6209E512MR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AN	eh	XC6212A512MR	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AP	-	XC6209A522MR	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AP	-	XC6504A311MR-G	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AP	-	XC6601A17BMR	LVR-IC	1.75V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9AP	ec	XC6113B622MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AP	eg	XC6209E522MR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AP	eh	XC6212A522MR	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AR	-	XC6209A532MR	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AR	-	XC6504A321MR-G	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AR	-	XC6601A181MR	LVR-IC	1.8V±20mV, 400mA, +CE, PDR, UVLO	SOT-25	28gj	VR11	6g	Tor
9AR	ec	XC6113B623MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AR	eg	XC6209E532MR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AR	eh	XC6212A532MR	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AS	-	XC6209A542MR	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AS	-	XC6504A331MR-G	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AS	ec	XC6113B624MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AS	eg	XC6209E542MR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AS	eh	XC6212A542MR	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AT	-	XC6209A552MR	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AT	-	XC6504A341MR-G	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AT	ec	XC6113B625MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AT	eg	XC6209E552MR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AT	eh	XC6212A552MR	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AU	-	XC6209A562MR	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9AU	-	XC6504A351MR-G	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AU	ec	XC6113B626MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AU	eg	XC6209E562MR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AU	eh	XC6212A562MR	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AV	-	XC6209A572MR	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AV	-	XC6504A361MR-G	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AV	ec	XC6113B627MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AV	eg	XC6209E572MR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AV	eh	XC6212A572MR	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AX	-	XC6209A582MR	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AX	-	XC6504A371MR-G	LVR-IC	LDO, 3.7V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AX	ec	XC6113B628MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AX	eg	XC6209E582MR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AX	eh	XC6212A582MR	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AY	-	XC6209A592MR	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AY	-	XC6504A381MR-G	LVR-IC	LDO, 3.8V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AY	ec	XC6113B629MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AY	eg	XC6209E592MR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AY	eh	XC6212A592MR	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9AZ	-	XC6209A602MR	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AZ	-	XC6504A391MR-G	LVR-IC	LDO, 3.9V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9AZ	ec	XC6113B630MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28cp	VD17	6g	Tor
9AZ	eg	XC6209E602MR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9AZ	eh	XC6212A602MR	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9B	-	R3111N191A	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
9B	-	RN5RL29AA	LVR-IC	2.9V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
9B	eu	RN5VD19CA	Vdet-IC	1.9V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
9B0	-	XC6209B312MR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B0	-	XC6504A401MR-G	LVR-IC	LDO, 4.0V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B0	-	XC6601B071MR	LVR-IC	0.7V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9B0	eg	XC6209F312MR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B0	eh	XC6212B312MR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9B0	ej	XC6113C231MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9B1	-	XC6209B322MR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B1	-	XC6504A411MR-G	LVR-IC	LDO, 4.1V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B1	-	XC6601B07BMR	LVR-IC	0.75V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9B1	eg	XC6209F322MR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B1	eh	XC6212B322MR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9B1	ej	XC6113C232MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9B2	-	XC6209B332MR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B2	-	XC6504A421MR-G	LVR-IC	LDO, 4.2V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B2	-	XC6601B081MR	LVR-IC	0.8V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9B2	eg	XC6209F332MR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B2	eh	XC6212B332MR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9B2	ej	XC6113C233MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9B3	-	XC6209B342MR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B3	-	XC6504A431MR-G	LVR-IC	LDO, 4.3V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B3	-	XC6601B08BMR	LVR-IC	0.85V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9B3	eg	XC6209F342MR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B3	eh	XC6212B342MR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9B3	ej	XC6113C234MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9B4	-	XC6209B352MR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B4	-	XC6504A441MR-G	LVR-IC	LDO, 4.4V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B4	-	XC6601B091MR	LVR-IC	0.9V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9B4	eg	XC6209F352MR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B4	eh	XC6212B352MR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9B4	ej	XC6113C235MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9B5	-	XC6209B362MR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B5	-	XC6504A451MR-G	LVR-IC	LDO, 4.5V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B5	-	XC6601B09BMR	LVR-IC	0.95V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9B5	eg	XC6209F362MR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B5	eh	XC6212B362MR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9B5	ej	XC6113C236MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9B6	-	XC6209B372MR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B6	-	XC6504A461MR-G	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B6	-	XC6601B101MR	LVR-IC	1.0V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9B6	eg	XC6209F372MR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B6	eh	XC6212B372MR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9B6	ej	XC6113C237MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9B7	-	XC6209B382MR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9B7	-	XC6504A471MR-G	LVR-IC	LDO, 4.7V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B7	-	XC6601B10BMR	LVR-IC	1.05V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9B7	eg	XC6209F382MR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B7	eh	XC6212B382MR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9B7	ej	XC6113C238MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9B8	-	XC6209B392MR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B8	-	XC6504A481MR-G	LVR-IC	LDO, 4.8V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B8	-	XC6601B111MR	LVR-IC	1.1V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9B8	eg	XC6209F392MR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B8	eh	XC6212B392MR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9B8	ej	XC6113C239MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9B9	-	XC6209B402MR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B9	-	XC6504A491MR-G	LVR-IC	LDO, 4.9V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B9	-	XC6601B11BMR	LVR-IC	1.15V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9B9	eg	XC6209F402MR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9B9	eh	XC6212B402MR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9B9	ej	XC6113C240MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BA	-	XC6209B412MR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BA	-	XC6504A501MR-G	LVR-IC	LDO, 5.0V±1%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BA	-	XC6601B121MR	LVR-IC	1.2V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9BA	eg	XC6209F412MR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BA	eh	XC6212B412MR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BA	ej	XC6113C241MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BB	-	XC6209B422MR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BB	-	XC6601B12BMR	LVR-IC	1.25V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9BB	eg	XC6209F422MR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BB	eh	XC6212B422MR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BB	ej	XC6113C242MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BC	-	XC6209B432MR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BC	-	XC6601B131MR	LVR-IC	1.3V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9BC	eg	XC6209F432MR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BC	eh	XC6212B432MR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BC	ej	XC6113C243MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BD	-	XC6209B442MR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BD	-	XC6601B13BMR	LVR-IC	1.35V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9BD	eg	XC6209F442MR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BD	eh	XC6212B442MR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BD	ej	XC6113C244MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BE	-	XC6209B452MR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BE	-	XC6601B141MR	LVR-IC	1.4V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9BE	eg	XC6209F452MR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BE	eh	XC6212B452MR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BE	ej	XC6113C245MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BF	-	XC6209B462MR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BF	-	XC6601B14BMR	LVR-IC	1.45V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9BF	ec	XC6113C216MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BF	eg	XC6209F462MR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BF	eh	XC6212B462MR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BF	ej	XC6113C246MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BH	-	XC6209B472MR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BH	-	XC6601B151MR	LVR-IC	1.5V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9BH	ec	XC6113C217MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BH	eg	XC6209F472MR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BH	eh	XC6212B472MR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BH	ej	XC6113C247MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BK	-	XC6209B482MR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BK	-	XC6601B15BMR	LVR-IC	1.55V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9BK	ec	XC6113C218MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BK	eg	XC6209F482MR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BK	eh	XC6212B482MR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BK	ej	XC6113C248MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BL	-	XC6209B492MR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BL	-	XC6601B161MR	LVR-IC	1.6V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9BL	ec	XC6113C219MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BL	eg	XC6209F492MR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BL	eh	XC6212B492MR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BL	ej	XC6113C249MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BM	-	XC6209B502MR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BM	-	XC6601B16BMR	LVR-IC	1.65V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9BM	ec	XC6113C220MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9BM	eg	XC6209F502MR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BM	eh	XC6212B502MR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BM	ej	XC6113C250MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BN	-	XC6209B512MR	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BN	-	XC6601B171MR	LVR-IC	1.7V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9BN	ec	XC6113C221MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BN	eg	XC6209F512MR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BN	eh	XC6212B512MR	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BP	-	XC6209B522MR	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BP	-	XC6601B17BMR	LVR-IC	1.75V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9BP	ec	XC6113C222MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BP	eg	XC6209F522MR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BP	eh	XC6212B522MR	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BR	-	XC6209B532MR	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BR	-	XC6601B181MR	LVR-IC	1.8V±20mV, 400mA, +CE, UVLO	SOT-25	28gj	VR11	6g	Tor
9BR	ec	XC6113C223MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BR	eg	XC6209F532MR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BR	eh	XC6212B532MR	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BS	-	XC6209B542MR	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BS	ec	XC6113C224MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BS	eg	XC6209F542MR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BS	eh	XC6212B542MR	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BT	-	XC6209B552MR	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BT	ec	XC6113C225MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BT	eg	XC6209F552MR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BT	eh	XC6212B552MR	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BU	-	XC6209B562MR	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BU	ec	XC6113C226MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BU	eg	XC6209F562MR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BU	eh	XC6212B562MR	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BV	-	XC6209B572MR	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BV	ec	XC6113C227MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BV	eg	XC6209F572MR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BV	eh	XC6212B572MR	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BX	-	XC6209B582MR	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BX	ec	XC6113C228MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BX	eg	XC6209F582MR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BX	eh	XC6212B582MR	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BY	-	XC6209B592MR	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BY	ec	XC6113C229MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BY	eg	XC6209F592MR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BY	eh	XC6212B592MR	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9BZ	-	XC6209B602MR	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BZ	ec	XC6113C230MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9BZ	eg	XC6209F602MR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9BZ	eh	XC6212B602MR	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9C	-	R3111N291A	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
9C	-	RN5RL39AA	LVR-IC	3.9V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
9C	eu	RN5VD29CA	Vdet-IC	2.9V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
9C0	-	XC6209C312MR	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C0	eg	XC6209G312MR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C0	eh	XC6212C312MR	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9C0	ej	XC6113C331MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9C1	-	XC6209C322MR	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C1	eg	XC6209G322MR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C1	eh	XC6212C322MR	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9C1	ej	XC6113C332MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9C2	-	XC6209C332MR	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C2	-	XC6223A121MR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9C2	eg	XC6209G332MR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C2	eh	XC6212C332MR	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9C2	ej	XC6113C333MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9C3	-	XC6209C342MR	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C3	-	XC6223A131MR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9C3	eg	XC6209G342MR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C3	eh	XC6212C342MR	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9C3	ej	XC6113C334MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9C4	-	XC6209C352MR	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C4	-	XC6223A141MR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9C4	eg	XC6209G352MR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9C4	eh	XC6212C352MR	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9C4	ej	XC6113C335MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9C5	-	XC6209C362MR	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C5	-	XC6223A151MR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9C5	eg	XC6209G362MR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C5	eh	XC6212C362MR	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9C5	ej	XC6113C336MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9C6	-	XC6209C372MR	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C6	-	XC6223A161MR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9C6	eg	XC6209G372MR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C6	eh	XC6212C372MR	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9C6	ej	XC6113C337MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9C7	-	XC6209C382MR	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C7	-	XC6223A171MR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9C7	eg	XC6209G382MR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C7	eh	XC6212C382MR	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9C7	ej	XC6113C338MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9C8	-	XC6209C392MR	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C8	-	XC6223A181MR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9C8	eg	XC6209G392MR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C8	eh	XC6212C392MR	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9C8	ej	XC6113C339MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9C9	-	XC6209C402MR	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C9	-	XC6223A191MR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9C9	eg	XC6209G402MR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9C9	eh	XC6212C402MR	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9C9	ej	XC6113C340MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CA	-	XC6209C412MR	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CA	-	XC6223A201MR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CA	eg	XC6209G412MR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CA	eh	XC6212C412MR	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CA	ej	XC6113C341MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CB	-	XC6209C422MR	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CB	-	XC6223A211MR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CB	eg	XC6209G422MR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CB	eh	XC6212C422MR	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CB	ej	XC6113C342MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CC	-	XC6209C432MR	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CC	-	XC6223A221MR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CC	eg	XC6209G432MR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CC	eh	XC6212C432MR	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CC	ej	XC6113C343MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CD	-	XC6209C442MR	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CD	-	XC6223A231MR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CD	eg	XC6209G442MR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CD	eh	XC6212C442MR	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CD	ej	XC6113C344MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CE	-	XC6209C452MR	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CE	-	XC6223A241MR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CE	eg	XC6209G452MR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CE	eh	XC6212C452MR	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CE	ej	XC6113C345MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CF	-	XC6209C462MR	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CF	-	XC6223A251MR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CF	ec	XC6113C316MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CF	eg	XC6209G462MR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CF	eh	XC6212C462MR	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CF	ej	XC6113C346MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CH	-	XC6209C472MR	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CH	-	XC6223A261MR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CH	ec	XC6113C317MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CH	eg	XC6209G472MR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CH	eh	XC6212C472MR	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CH	ej	XC6113C347MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CK	-	XC6209C482MR	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CK	-	XC6223A271MR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CK	ec	XC6113C318MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CK	eg	XC6209G482MR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CK	eh	XC6212C482MR	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CK	ej	XC6113C348MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9CL	-	XC6209C492MR	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CL	-	XC6223A281MR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CL	ec	XC6113C319MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CL	eg	XC6209G492MR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CL	eh	XC6212C492MR	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CL	ej	XC6113C349MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CM	-	XC6209C502MR	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CM	-	XC6223A291MR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CM	ec	XC6113C320MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CM	eg	XC6209G502MR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CM	eh	XC6212C502MR	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CM	ej	XC6113C350MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CN	-	XC6209C512MR	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CN	-	XC6223A301MR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CN	ec	XC6113C321MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CN	eg	XC6209G512MR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CN	eh	XC6212C512MR	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CP	-	XC6209C522MR	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CP	-	XC6223A311MR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CP	ec	XC6113C322MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CP	eg	XC6209G522MR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CP	eh	XC6212C522MR	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CR	-	XC6209C532MR	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CR	-	XC6223A321MR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CR	ec	XC6113C323MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CR	eg	XC6209G532MR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CR	eh	XC6212C532MR	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CS	-	XC6209C542MR	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CS	-	XC6223A331MR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CS	ec	XC6113C324MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CS	eg	XC6209G542MR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CS	eh	XC6212C542MR	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CT	-	XC6209C552MR	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CT	-	XC6223A341MR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CT	ec	XC6113C325MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CT	eg	XC6209G552MR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CT	eh	XC6212C552MR	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CU	-	XC6209C562MR	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CU	-	XC6223A351MR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CU	ec	XC6113C326MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CU	eg	XC6209G562MR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CU	eh	XC6212C562MR	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CV	-	XC6209C572MR	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CV	-	XC6223A361MR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CV	ec	XC6113C327MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CV	eg	XC6209G572MR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CV	eh	XC6212C572MR	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CX	-	XC6209C582MR	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CX	-	XC6223A371MR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CX	ec	XC6113C328MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CX	eg	XC6209G582MR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CX	eh	XC6212C582MR	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CY	-	XC6209C592MR	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CY	-	XC6223A381MR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CY	ec	XC6113C329MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CY	eg	XC6209G592MR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CY	eh	XC6212C592MR	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9CZ	-	XC6209C602MR	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CZ	-	XC6223A391MR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9CZ	ec	XC6113C330MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9CZ	eg	XC6209G602MR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9CZ	eh	XC6212C602MR	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9D	-	R3111N391A	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
9D	-	RN5RL49AA	LVR-IC	4.9V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
9D	eu	RN5VD39CA	Vdet-IC	3.9V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
9D0	-	XC6209D312MR	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D0	-	XC6223A401MR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9D0	eg	XC6209H312MR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D0	eh	XC6212D312MR	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9D0	ej	XC6113C431MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9D1	-	XC6209D322MR	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D1	eg	XC6209H322MR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D1	eh	XC6212D322MR	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9D1	ej	XC6113C432MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9D2	-	XC6209D332MR	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D2	eg	XC6209H332MR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D2	eh	XC6212D332MR	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9D2	ej	XC6113C433MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9D3	-	XC6209D342MR	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D3	eg	XC6209H342MR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D3	eh	XC6212D342MR	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9D3	ej	XC6113C434MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9D4	-	XC6209D352MR	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D4	eg	XC6209H352MR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D4	eh	XC6212D352MR	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9D4	ej	XC6113C435MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9D5	-	XC6209D362MR	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D5	eg	XC6209H362MR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D5	eh	XC6212D362MR	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9D5	ej	XC6113C436MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9D6	-	XC6209D372MR	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D6	eg	XC6209H372MR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D6	eh	XC6212D372MR	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9D6	ej	XC6113C437MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9D7	-	XC6209D382MR	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D7	eg	XC6209H382MR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D7	eh	XC6212D382MR	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9D7	ej	XC6113C438MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9D8	-	XC6209D392MR	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D8	eg	XC6209H392MR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D8	eh	XC6212D392MR	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9D8	ej	XC6113C439MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9D9	-	XC6209D402MR	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D9	eg	XC6209H402MR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9D9	eh	XC6212D402MR	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9D9	ej	XC6113C440MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DA	-	XC6209D412MR	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DA	eg	XC6209H412MR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DA	eh	XC6212D412MR	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DA	ej	XC6113C441MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DB	-	XC6209D422MR	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DB	eg	XC6209H422MR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DB	eh	XC6212D422MR	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DB	ej	XC6113C442MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DC	-	XC6209D432MR	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DC	eg	XC6209H432MR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DC	eh	XC6212D432MR	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DC	ej	XC6113C443MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DD	-	XC6209D442MR	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DD	eg	XC6209H442MR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DD	eh	XC6212D442MR	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DD	ej	XC6113C444MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DE	-	XC6209D452MR	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DE	eg	XC6209H452MR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DE	eh	XC6212D452MR	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DE	ej	XC6113C445MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DF	-	XC6209D462MR	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DF	ec	XC6113C416MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DF	eg	XC6209H462MR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DF	eh	XC6212D462MR	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DF	ej	XC6113C446MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DH	-	XC6209D472MR	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DH	ec	XC6113C417MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DH	eg	XC6209H472MR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DH	eh	XC6212D472MR	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DH	ej	XC6113C447MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DK	-	XC6209D482MR	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DK	ec	XC6113C418MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DK	eg	XC6209H482MR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DK	eh	XC6212D482MR	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9DK	ej	XC6113C448MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DL	-	XC6209D492MR	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DL	ec	XC6113C419MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DL	eg	XC6209H492MR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DL	eh	XC6212D492MR	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DL	ej	XC6113C449MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DM	-	XC6209D502MR	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DM	ec	XC6113C420MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DM	eg	XC6209H502MR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DM	eh	XC6212D502MR	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DM	ej	XC6113C450MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DN	-	XC6209D512MR	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DN	ec	XC6113C421MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DN	eg	XC6209H512MR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DN	eh	XC6212D512MR	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DP	-	XC6209D522MR	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DP	ec	XC6113C422MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DP	eg	XC6209H522MR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DP	eh	XC6212D522MR	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DR	-	XC6209D532MR	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DR	ec	XC6113C423MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DR	eg	XC6209H532MR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DR	eh	XC6212D532MR	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DS	-	XC6209D542MR	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DS	ec	XC6113C424MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DS	eg	XC6209H542MR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DS	eh	XC6212D542MR	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DT	-	XC6209D552MR	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DT	ec	XC6113C425MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DT	eg	XC6209H552MR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DT	eh	XC6212D552MR	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DU	-	XC6209D562MR	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DU	ec	XC6113C426MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DU	eg	XC6209H562MR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DU	eh	XC6212D562MR	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DV	-	XC6209D572MR	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DV	ec	XC6113C427MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DV	eg	XC6209H572MR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DV	eh	XC6212D572MR	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DX	-	XC6209D582MR	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DX	ec	XC6113C428MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DX	eg	XC6209H582MR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DX	eh	XC6212D582MR	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DY	-	XC6209D592MR	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DY	ec	XC6113C429MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DY	eg	XC6209H592MR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DY	eh	XC6212D592MR	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9DZ	-	XC6209D602MR	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DZ	ec	XC6113C430MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9DZ	eg	XC6209H602MR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9DZ	eh	XC6212D602MR	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9E	-	R3111N491A	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
9E	-	RN5RL59AA	LVR-IC	5.9V±2.5%, 150mA	SOT-23-5	28vu	VR1	6g	Ric
9E	eu	RN5VD49CA	Vdet-IC	4.9V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
9E0	ej	XC6113C531MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9E1	ej	XC6113C532MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9E2	-	XC6223A12BMR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9E2	ej	XC6113C533MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9E3	-	XC6223A13BMR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9E3	ej	XC6113C534MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9E4	-	XC6223A14BMR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9E4	ej	XC6113C535MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9E5	-	XC6223A15BMR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9E5	ej	XC6113C536MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9E6	-	XC6223A16BMR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9E6	ej	XC6113C537MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9E7	-	XC6223A17BMR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9E7	ej	XC6113C538MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9E8	-	XC6209A09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9E8	-	XC6223A18BMR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9E8	eg	XC6209E09AMR	LVR-IC	LDO, 0.95V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9E8	eh	XC6212A09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9E8	ej	XC6113C539MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9E9	-	XC6209A10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9E9	-	XC6223A19BMR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9E9	eg	XC6209E10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9E9	eh	XC6212A10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9E9	ej	XC6113C540MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EA	-	XC6209A11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EA	-	XC6223A20BMR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9EA	eg	XC6209E11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EA	eh	XC6212A11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9EA	ej	XC6113C541MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EB	-	XC6209A12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EB	-	XC6223A21BMR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9EB	eg	XC6209E12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EB	eh	XC6212A12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9EB	ej	XC6113C542MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EC	-	XC6209A13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EC	-	XC6223A22BMR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9EC	eg	XC6209E13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EC	eh	XC6212A13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9EC	ej	XC6113C543MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9ED	-	XC6209A14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9ED	-	XC6223A23BMR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9ED	eg	XC6209E14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9ED	eh	XC6212A14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9ED	ej	XC6113C544MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EE	-	XC6209A15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EE	-	XC6223A24BMR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9EE	eg	XC6209E15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EE	eh	XC6212A15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9EE	ej	XC6113C545MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EF	-	XC6209A16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EF	-	XC6223A25BMR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9EF	ec	XC6113C516MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EF	eg	XC6209E16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EF	eh	XC6212A16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9EF	ej	XC6113C546MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EH	-	XC6209A17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EH	-	XC6223A26BMR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9EH	ec	XC6113C517MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EH	eg	XC6209E17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EH	eh	XC6212A17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9EH	ej	XC6113C547MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EK	-	XC6209A18AMR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EK	-	XC6223A27BMR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9EK	ec	XC6113C518MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EK	eg	XC6209E18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EK	eh	XC6212A18AMR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9EK	ej	XC6113C548MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EL	-	XC6209A19AMR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EL	-	XC6223A28BMR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9EL	ec	XC6113C519MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EL	eg	XC6209E19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EL	eh	XC6212A19AMR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9EL	ej	XC6113C549MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EM	-	XC6209A20AMR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EM	-	XC6223A29BMR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9EM	ec	XC6113C520MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EM	eg	XC6209E20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EM	eh	XC6212A20AMR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9EM	ej	XC6113C550MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EN	-	XC6209A21AMR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EN	-	XC6223A30BMR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9EN	ec	XC6113C521MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EN	eg	XC6209E21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EN	eh	XC6212A21AMR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9EP	-	XC6209A22AMR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EP	-	XC6223A31BMR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9EP	ec	XC6113C522MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EP	eg	XC6209E22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EP	eh	XC6212A22AMR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9ER	-	XC6209A23AMR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9ER	-	XC6223A32BMR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9ER	ec	XC6113C523MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9ER	eg	XC6209E23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9ER	eh	XC6212A23AMR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9ES	-	XC6209A24AMR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9ES	-	XC6223A33BMR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9ES	ec	XC6113C524MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9ES	eg	XC6209E24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9ES	eh	XC6212A24AMR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9ET	-	XC6209A25AMR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9ET	-	XC6223A34BMR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9ET	ec	XC6113C525MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9ET	eg	XC6209E25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9ET	eh	XC6212A25AMR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9EU	-	XC6209A26AMR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EU	-	XC6223A35BMR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9EU	ec	XC6113C526MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EU	eg	XC6209E26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EU	eh	XC6212A26AMR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9EV	-	XC6209A27AMR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EV	-	XC6223A36BMR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9EV	ec	XC6113C527MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EV	eg	XC6209E27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EV	eh	XC6212A27AMR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9EX	-	XC6209A28AMR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EX	-	XC6223A37BMR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9EX	ec	XC6113C528MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EX	eg	XC6209E28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EX	eh	XC6212A28AMR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9EY	-	XC6209A29AMR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EY	-	XC6223A38BMR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9EY	ec	XC6113C529MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EY	eg	XC6209E29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EY	eh	XC6212A29AMR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9EZ	-	XC6209A30AMR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EZ	-	XC6223A39BMR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9EZ	ec	XC6113C530MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9EZ	eg	XC6209E30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9EZ	eh	XC6212A30AMR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9F	-	R3111N591A	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
9F	eu	RN5VD59CA	Vdet-IC	5.9V±2.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
9F0	ej	XC6113C631MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9F1	ej	XC6113C632MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9F2	-	XC6223B121MR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9F2	ej	XC6113C633MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9F3	-	XC6223B131MR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9F3	ej	XC6113C634MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9F4	-	XC6223B141MR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9F4	ej	XC6113C635MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9F5	-	XC6223B151MR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9F5	ej	XC6113C636MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9F6	-	XC6223B161MR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9F6	ej	XC6113C637MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9F7	-	XC6223B171MR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9F7	ej	XC6113C638MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9F8	-	XC6209B09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9F8	-	XC6223B181MR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9F8	eg	XC6209F09AMR	LVR-IC	LDO, 0.95V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9F8	eh	XC6212B09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9F8	ej	XC6113C639MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9F9	-	XC6209B10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9F9	-	XC6223B191MR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9F9	eg	XC6209F10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9F9	eh	XC6212B10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9F9	ej	XC6113C640MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FA	-	XC6209B11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9FA	-	XC6223B201MR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FA	eg	XC6209F11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FA	eh	XC6212B11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FA	ej	XC6113C641MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FB	-	XC6209B12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FB	-	XC6223B211MR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FB	eg	XC6209F12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FB	eh	XC6212B12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FB	ej	XC6113C642MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FC	-	XC6209B13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FC	-	XC6223B221MR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FC	eg	XC6209F13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FC	eh	XC6212B13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FC	ej	XC6113C643MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FD	-	XC6209B14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FD	-	XC6223B231MR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FD	eg	XC6209F14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FD	eh	XC6212B14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FD	ej	XC6113C644MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FE	-	XC6209B15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FE	-	XC6223B241MR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FE	eg	XC6209F15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FE	eh	XC6212B15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FE	ej	XC6113C645MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FF	-	XC6209B16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FF	-	XC6223B251MR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FF	ec	XC6113C616MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FF	eg	XC6209F16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FF	eh	XC6212B16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FF	ej	XC6113C646MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FH	-	XC6209B17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FH	-	XC6223B261MR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FH	ec	XC6113C617MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FH	eg	XC6209F17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FH	eh	XC6212B17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FH	ej	XC6113C647MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FK	-	XC6209B18AMR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FK	-	XC6223B271MR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FK	ec	XC6113C618MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FK	eg	XC6209F18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FK	eh	XC6212B18AMR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FK	ej	XC6113C648MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FL	-	XC6209B19AMR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FL	-	XC6223B281MR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FL	ec	XC6113C619MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FL	eg	XC6209F19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FL	eh	XC6212B19AMR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FL	ej	XC6113C649MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FM	-	XC6209B20AMR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FM	-	XC6223B291MR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FM	ec	XC6113C620MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FM	eg	XC6209F20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FM	eh	XC6212B20AMR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FM	ej	XC6113C650MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FN	-	XC6209B21AMR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FN	-	XC6223B301MR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FN	ec	XC6113C621MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FN	eg	XC6209F21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FN	eh	XC6212B21AMR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FP	-	XC6209B22AMR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FP	-	XC6223B311MR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FP	ec	XC6113C622MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FP	eg	XC6209F22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FP	eh	XC6212B22AMR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FR	-	XC6209B23AMR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FR	-	XC6223B321MR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FR	ec	XC6113C623MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FR	eg	XC6209F23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FR	eh	XC6212B23AMR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FS	-	XC6209B24AMR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9FS	-	XC6223B331MR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FS	ec	XC6113C624MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FS	eg	XC6209F24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FS	eh	XC6212B24AMR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FT	-	XC6209B25AMR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FT	-	XC6223B341MR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FT	ec	XC6113C625MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FT	eg	XC6209F25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FT	eh	XC6212B25AMR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FU	-	XC6209B26AMR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FU	-	XC6223B351MR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FU	ec	XC6113C626MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FU	eg	XC6209F26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FU	eh	XC6212B26AMR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FV	-	XC6209B27AMR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FV	-	XC6223B361MR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FV	ec	XC6113C627MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FV	eg	XC6209F27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FV	eh	XC6212B27AMR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FX	-	XC6209B28AMR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FX	-	XC6223B371MR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FX	ec	XC6113C628MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FX	eg	XC6209F28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FX	eh	XC6212B28AMR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FY	-	XC6209B29AMR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FY	-	XC6223B381MR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FY	ec	XC6113C629MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FY	eg	XC6209F29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FY	eh	XC6212B29AMR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9FZ	-	XC6209B30AMR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FZ	-	XC6223B391MR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9FZ	ec	XC6113C630MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28cp	VD17	6g	Tor
9FZ	eg	XC6209F30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9FZ	eh	XC6212B30AMR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9H	-	R3111N091C	Vdet-IC	0.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
9H0	-	XC6223B401MR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9H0	ej	XC6113D331MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9H1	ej	XC6113D332MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9H2	ej	XC6113D333MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9H3	ej	XC6113D334MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9H4	ej	XC6113D335MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9H5	ej	XC6113D336MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9H6	ej	XC6113D337MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9H7	ej	XC6113D338MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9H8	-	XC6209C09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9H8	eg	XC6209G09AMR	LVR-IC	LDO, 0.95V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9H8	eh	XC6212C09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9H8	ej	XC6113D339MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9H9	-	XC6209C10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9H9	eg	XC6209G10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9H9	eh	XC6212C10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9H9	ej	XC6113D340MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HA	-	XC6209C11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HA	eg	XC6209G11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HA	eh	XC6212C11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HA	ej	XC6113D341MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HB	-	XC6209C12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HB	eg	XC6209G12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HB	eh	XC6212C12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HB	ej	XC6113D342MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HC	-	XC6209C13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HC	eg	XC6209G13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HC	eh	XC6212C13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HC	ej	XC6113D343MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HD	-	XC6209C14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HD	eg	XC6209G14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HD	eh	XC6212C14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HD	ej	XC6113D344MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HE	-	XC6209C15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HE	eg	XC6209G15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9HE	eh	XC6212C15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HE	ej	XC6113D345MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HF	-	XC6209C16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HF	ec	XC6113D316MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HF	eg	XC6209G16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HF	eh	XC6212C16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HF	ej	XC6113D346MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HH	-	XC6209C17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HH	ec	XC6113D317MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HH	eg	XC6209G17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HH	eh	XC6212C17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HH	ej	XC6113D347MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HK	-	XC6209C18AMR	LVR-IC	LDO, 1.85V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HK	ec	XC6113D318MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HK	eg	XC6209G18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HK	eh	XC6212C18AMR	LVR-IC	LDO, 1.85V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HK	ej	XC6113D348MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HL	-	XC6209C19AMR	LVR-IC	LDO, 1.95V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HL	ec	XC6113D319MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HL	eg	XC6209G19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HL	eh	XC6212C19AMR	LVR-IC	LDO, 1.95V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HL	ej	XC6113D349MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HM	-	XC6209C20AMR	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HM	ec	XC6113D320MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HM	eg	XC6209G20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HM	eh	XC6212C20AMR	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HM	ej	XC6113D350MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HN	-	XC6209C21AMR	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HN	ec	XC6113D321MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HN	eg	XC6209G21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HN	eh	XC6212C21AMR	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HP	-	XC6209C22AMR	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HP	ec	XC6113D322MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HP	eg	XC6209G22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HP	eh	XC6212C22AMR	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HR	-	XC6209C23AMR	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HR	ec	XC6113D323MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HR	eg	XC6209G23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HR	eh	XC6212C23AMR	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HS	-	XC6209C24AMR	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HS	ec	XC6113D324MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HS	eg	XC6209G24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HS	eh	XC6212C24AMR	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HT	-	XC6209C25AMR	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HT	ec	XC6113D325MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HT	eg	XC6209G25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HT	eh	XC6212C25AMR	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HU	-	XC6209C26AMR	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HU	ec	XC6113D326MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HU	eg	XC6209G26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HU	eh	XC6212C26AMR	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HV	-	XC6209C27AMR	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HV	ec	XC6113D327MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HV	eg	XC6209G27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HV	eh	XC6212C27AMR	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HX	-	XC6209C28AMR	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HX	ec	XC6113D328MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HX	eg	XC6209G28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HX	eh	XC6212C28AMR	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HY	-	XC6209C29AMR	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HY	ec	XC6113D329MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HY	eg	XC6209G29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HY	eh	XC6212C29AMR	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9HZ	-	XC6209C30AMR	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HZ	ec	XC6113D330MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9HZ	eg	XC6209G30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9HZ	eh	XC6212C30AMR	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9J	-	R3111N191C	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
9K	-	R3111N291C	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
9K0	ej	XC6113D431MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9K1	ej	XC6113D432MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9K2	-	XC6223B12BMR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9K2	ej	XC6113D433MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9K3	-	XC6223B13BMR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9K3	ej	XC6113D434MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9K4	-	XC6223B14BMR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9K4	ej	XC6113D435MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9K5	-	XC6223B15BMR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9K5	ej	XC6113D436MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9K6	-	XC6223B16BMR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9K6	ej	XC6113D437MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9K7	-	XC6223B17BMR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9K7	ej	XC6113D438MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9K8	-	XC6209D09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9K8	-	XC6223B18BMR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9K8	eg	XC6209H09AMR	LVR-IC	LDO, 0.95V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9K8	eh	XC6212D09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9K8	ej	XC6113D439MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9K9	-	XC6209D10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9K9	-	XC6223B19BMR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9K9	eg	XC6209H10AMR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9K9	eh	XC6212D10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9K9	ej	XC6113D440MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KA	-	XC6209D11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KA	-	XC6223B20BMR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KA	eg	XC6209H11AMR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KA	eh	XC6212D11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KA	ej	XC6113D441MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KB	-	XC6209D12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KB	-	XC6223B21BMR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KB	eg	XC6209H12AMR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KB	eh	XC6212D12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KB	ej	XC6113D442MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KC	-	XC6209D13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KC	-	XC6223B22BMR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KC	eg	XC6209H13AMR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KC	eh	XC6212D13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KC	ej	XC6113D443MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KD	-	XC6209D14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KD	-	XC6223B23BMR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KD	eg	XC6209H14AMR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KD	eh	XC6212D14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KD	ej	XC6113D444MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KE	-	XC6209D15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KE	-	XC6223B24BMR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KE	eg	XC6209H15AMR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KE	eh	XC6212D15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KE	ej	XC6113D445MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KF	-	XC6209D16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KF	-	XC6223B25BMR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KF	ec	XC6113D416MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KF	eg	XC6209H16AMR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KF	eh	XC6212D16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KF	ej	XC6113D446MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KH	-	XC6209D17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KH	-	XC6223B26BMR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KH	ec	XC6113D417MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KH	eg	XC6209H17AMR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KH	eh	XC6212D17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KH	ej	XC6113D447MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KK	-	XC6209D18AMR	LVR-IC	LDO, 1.85V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KK	-	XC6223B27BMR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KK	ec	XC6113D418MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KK	eg	XC6209H18AMR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KK	eh	XC6212D18AMR	LVR-IC	LDO, 1.85V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KK	ej	XC6113D448MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KL	-	XC6209D19AMR	LVR-IC	LDO, 1.95V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KL	-	XC6223B28BMR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KL	ec	XC6113D419MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KL	eg	XC6209H19AMR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9KL	eh	XC6212D19AMR	LVR-IC	LDO, 1.95V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KL	ej	XC6113D449MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KM	-	XC6209D20AMR	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KM	-	XC6223B29BMR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KM	ec	XC6113D420MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KM	eg	XC6209H20AMR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KM	eh	XC6212D20AMR	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KM	ej	XC6113D450MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KN	-	XC6209D21AMR	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KN	-	XC6223B30BMR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KN	ec	XC6113D421MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KN	eg	XC6209H21AMR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KN	eh	XC6212D21AMR	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KP	-	XC6209D22AMR	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KP	-	XC6223B31BMR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KP	ec	XC6113D422MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KP	eg	XC6209H22AMR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KP	eh	XC6212D22AMR	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KR	-	XC6209D23AMR	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KR	-	XC6223B32BMR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KR	ec	XC6113D423MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KR	eg	XC6209H23AMR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KR	eh	XC6212D23AMR	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KS	-	XC6209D24AMR	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KS	-	XC6223B33BMR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KS	ec	XC6113D424MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KS	eg	XC6209H24AMR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KS	eh	XC6212D24AMR	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KT	-	XC6209D25AMR	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KT	-	XC6223B34BMR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KT	ec	XC6113D425MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KT	eg	XC6209H25AMR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KT	eh	XC6212D25AMR	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KU	-	XC6209D26AMR	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KU	-	XC6223B35BMR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KU	ec	XC6113D426MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KU	eg	XC6209H26AMR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KU	eh	XC6212D26AMR	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KV	-	XC6209D27AMR	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KV	-	XC6223B36BMR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KV	ec	XC6113D427MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KV	eg	XC6209H27AMR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KV	eh	XC6212D27AMR	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KX	-	XC6209D28AMR	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KX	-	XC6223B37BMR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KX	ec	XC6113D428MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KX	eg	XC6209H28AMR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KX	eh	XC6212D28AMR	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KY	-	XC6209D29AMR	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KY	-	XC6223B38BMR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KY	ec	XC6113D429MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KY	eg	XC6209H29AMR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KY	eh	XC6212D29AMR	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9KZ	-	XC6209D30AMR	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KZ	-	XC6223B39BMR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
9KZ	ec	XC6113D430MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9KZ	eg	XC6209H30AMR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9KZ	eh	XC6212D30AMR	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9L	-	R3111N391C	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
9L0	-	XC6209A31AMR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L0	eg	XC6209E31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L0	eh	XC6212A31AMR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9L0	ej	XC6113D531MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9L1	-	XC6209A32AMR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L1	eg	XC6209E32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L1	eh	XC6212A32AMR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9L1	ej	XC6113D532MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9L2	-	XC6209A33AMR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L2	-	XC6223C121MR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L2	eg	XC6209E33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9L2	eh	XC6212A33AMR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9L2	ej	XC6113D533MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9L3	-	XC6209A34AMR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L3	-	XC6223C131MR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L3	eg	XC6209E34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L3	eh	XC6212A34AMR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9L3	ej	XC6113D534MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9L4	-	XC6209A35AMR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L4	-	XC6223C141MR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L4	eg	XC6209E35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L4	eh	XC6212A35AMR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9L4	ej	XC6113D535MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9L5	-	XC6209A36AMR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L5	-	XC6223C151MR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L5	eg	XC6209E36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L5	eh	XC6212A36AMR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9L5	ej	XC6113D536MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9L6	-	XC6209A37AMR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L6	-	XC6223C161MR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L6	eg	XC6209E37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L6	eh	XC6212A37AMR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9L6	ej	XC6113D537MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9L7	-	XC6209A38AMR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L7	-	XC6223C171MR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L7	eg	XC6209E38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L7	eh	XC6212A38AMR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9L7	ej	XC6113D538MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9L8	-	XC6209A39AMR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L8	-	XC6223C181MR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L8	eg	XC6209E39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L8	eh	XC6212A39AMR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9L8	ej	XC6113D539MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9L9	-	XC6209A40AMR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L9	-	XC6223C191MR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L9	eg	XC6209E40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9L9	eh	XC6212A40AMR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9L9	ej	XC6113D540MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LA	-	XC6209A41AMR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LA	-	XC6223C201MR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LA	eg	XC6209E41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LA	eh	XC6212A41AMR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LA	ej	XC6113D541MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LB	-	XC6209A42AMR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LB	-	XC6223C211MR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LB	eg	XC6209E42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LB	eh	XC6212A42AMR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LB	ej	XC6113D542MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LC	-	XC6209A43AMR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LC	-	XC6223C221MR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LC	eg	XC6209E43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LC	eh	XC6212A43AMR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LC	ej	XC6113D543MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LD	-	XC6209A44AMR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LD	-	XC6223C231MR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LD	eg	XC6209E44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LD	eh	XC6212A44AMR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LD	ej	XC6113D544MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LE	-	XC6209A45AMR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LE	-	XC6223C241MR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LE	eg	XC6209E45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LE	eh	XC6212A45AMR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LE	ej	XC6113D545MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LF	-	XC6209A46AMR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LF	-	XC6223C251MR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LF	ec	XC6113D516MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LF	eg	XC6209E46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LF	eh	XC6212A46AMR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LF	ej	XC6113D546MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LH	-	XC6209A47AMR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LH	-	XC6223C261MR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9LH	ec	XC6113D517MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LH	eg	XC6209E47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LH	eh	XC6212A47AMR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LH	ej	XC6113D547MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LK	-	XC6209A48AMR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LK	-	XC6223C271MR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LK	ec	XC6113D518MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LK	eg	XC6209E48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LK	eh	XC6212A48AMR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LK	ej	XC6113D548MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LL	-	XC6209A49AMR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LL	-	XC6223C281MR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LL	ec	XC6113D519MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LL	eg	XC6209E49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LL	eh	XC6212A49AMR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LL	ej	XC6113D549MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LM	-	XC6209A50AMR	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LM	-	XC6223C291MR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LM	ec	XC6113D520MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LM	eg	XC6209E50AMR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LM	eh	XC6212A50AMR	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LM	ej	XC6113D550MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LN	-	XC6209A51AMR	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LN	-	XC6223C301MR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LN	ec	XC6113D521MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LN	eg	XC6209E51AMR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LN	eh	XC6212A51AMR	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LP	-	XC6209A52AMR	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LP	-	XC6223C311MR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LP	ec	XC6113D522MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LP	eg	XC6209E52AMR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LP	eh	XC6212A52AMR	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LR	-	XC6209A53AMR	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LR	-	XC6223C321MR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LR	ec	XC6113D523MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LR	eg	XC6209E53AMR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LR	eh	XC6212A53AMR	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LS	-	XC6209A54AMR	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LS	-	XC6223C331MR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LS	ec	XC6113D524MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LS	eg	XC6209E54AMR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LS	eh	XC6212A54AMR	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LT	-	XC6209A55AMR	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LT	-	XC6223C341MR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LT	ec	XC6113D525MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LT	eg	XC6209E55AMR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LT	eh	XC6212A55AMR	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LU	-	XC6209A56AMR	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LU	-	XC6223C351MR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LU	ec	XC6113D526MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LU	eg	XC6209E56AMR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LU	eh	XC6212A56AMR	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LV	-	XC6209A57AMR	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LV	-	XC6223C361MR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LV	ec	XC6113D527MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LV	eg	XC6209E57AMR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LV	eh	XC6212A57AMR	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LX	-	XC6209A58AMR	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LX	-	XC6223C371MR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LX	ec	XC6113D528MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LX	eg	XC6209E58AMR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LX	eh	XC6212A58AMR	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LY	-	XC6209A59AMR	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LY	-	XC6223C381MR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LY	ec	XC6113D529MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9LY	eg	XC6209E59AMR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LY	eh	XC6212A59AMR	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9LZ	-	XC6223C391MR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9LZ	ec	XC6113D530MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9M	-	R3111N491C	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9M0	-	XC6209B31AMR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M0	-	XC6223C401MR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9M0	eg	XC6209F31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M0	eh	XC6212B31AMR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9M0	ej	XC6113D631MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9M1	-	XC6209B32AMR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M1	eg	XC6209F32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M1	eh	XC6212B32AMR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9M1	ej	XC6113D632MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9M2	-	XC6209B33AMR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M2	eg	XC6209F33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M2	eh	XC6212B33AMR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9M2	ej	XC6113D633MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9M3	-	XC6209B34AMR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M3	eg	XC6209F34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M3	eh	XC6212B34AMR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9M3	ej	XC6113D634MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9M4	-	XC6209B35AMR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M4	eg	XC6209F35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M4	eh	XC6212B35AMR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9M4	ej	XC6113D635MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9M5	-	XC6209B36AMR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M5	eg	XC6209F36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M5	eh	XC6212B36AMR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9M5	ej	XC6113D636MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9M6	-	XC6209B37AMR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M6	eg	XC6209F37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M6	eh	XC6212B37AMR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9M6	ej	XC6113D637MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9M7	-	XC6209B38AMR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M7	eg	XC6209F38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M7	eh	XC6212B38AMR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9M7	ej	XC6113D638MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9M8	-	XC6209B39AMR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M8	eg	XC6209F39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M8	eh	XC6212B39AMR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9M8	ej	XC6113D639MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9M9	-	XC6209B40AMR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M9	eg	XC6209F40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9M9	eh	XC6212B40AMR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9M9	ej	XC6113D640MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MA	-	XC6209B41AMR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MA	eg	XC6209F41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MA	eh	XC6212B41AMR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9MA	ej	XC6113D641MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MB	-	XC6209B42AMR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MB	eg	XC6209F42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MB	eh	XC6212B42AMR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9MB	ej	XC6113D642MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MC	-	XC6209B43AMR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MC	eg	XC6209F43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MC	eh	XC6212B43AMR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9MC	ej	XC6113D643MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MD	-	XC6209B44AMR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MD	eg	XC6209F44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MD	eh	XC6212B44AMR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9MD	ej	XC6113D644MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9ME	-	XC6209B45AMR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9ME	eg	XC6209F45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9ME	eh	XC6212B45AMR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9ME	ej	XC6113D645MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MF	-	XC6209B46AMR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MF	ec	XC6113D616MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MF	eg	XC6209F46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MF	eh	XC6212B46AMR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9MF	ej	XC6113D646MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MH	-	XC6209B47AMR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MH	ec	XC6113D617MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MH	eg	XC6209F47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MH	eh	XC6212B47AMR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9MH	ej	XC6113D647MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MK	-	XC6209B48AMR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MK	ec	XC6113D618MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MK	eg	XC6209F48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MK	eh	XC6212B48AMR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9MK	ej	XC6113D648MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9ML	-	XC6209B49AMR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9ML	ec	XC6113D619MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9ML	eg	XC6209F49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9ML	eh	XC6212B49AMR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9ML	ej	XC6113D649MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MM	-	XC6209B50AMR	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MM	ec	XC6113D620MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MM	eg	XC6209F50AMR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MM	eh	XC6212B50AMR	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9MM	ej	XC6113D650MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MN	-	XC6209B51AMR	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MN	ec	XC6113D621MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MN	eg	XC6209F51AMR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MN	eh	XC6212B51AMR	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9MP	-	XC6209B52AMR	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MP	ec	XC6113D622MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MP	eg	XC6209F52AMR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MP	eh	XC6212B52AMR	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9MR	-	XC6209B53AMR	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MR	ec	XC6113D623MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MR	eg	XC6209F53AMR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MR	eh	XC6212B53AMR	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9MS	-	XC6209B54AMR	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MS	ec	XC6113D624MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MS	eg	XC6209F54AMR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MS	eh	XC6212B54AMR	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9MT	-	XC6209B55AMR	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MT	ec	XC6113D625MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MT	eg	XC6209F55AMR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MT	eh	XC6212B55AMR	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9MU	-	XC6209B56AMR	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MU	ec	XC6113D626MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MU	eg	XC6209F56AMR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MU	eh	XC6212B56AMR	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9MV	-	XC6209B57AMR	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MV	ec	XC6113D627MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MV	eg	XC6209F57AMR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MV	eh	XC6212B57AMR	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9MX	-	XC6209B58AMR	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MX	ec	XC6113D628MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MX	eg	XC6209F58AMR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MX	eh	XC6212B58AMR	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9MY	-	XC6209B59AMR	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MY	ec	XC6113D629MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9MY	eg	XC6209F59AMR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9MY	eh	XC6212B59AMR	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9MZ	ec	XC6113D630MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28cp	VD17	6g	Tor
9N	-	R3111N591C	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
9N0	-	XC6209C31AMR	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N0	eg	XC6209G31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N0	eh	XC6212C31AMR	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9N1	-	XC6209C32AMR	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N1	eg	XC6209G32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N1	eh	XC6212C32AMR	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9N2	-	XC6209C33AMR	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N2	-	XC6223C12BMR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9N2	eg	XC6209G33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N2	eh	XC6212C33AMR	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9N3	-	XC6209C34AMR	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N3	-	XC6223C13BMR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9N3	eg	XC6209G34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N3	eh	XC6212C34AMR	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9N4	-	XC6209C35AMR	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N4	-	XC6223C14BMR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9N4	eg	XC6209G35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N4	eh	XC6212C35AMR	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9N5	-	XC6209C36AMR	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N5	-	XC6223C15BMR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9N5	eg	XC6209G36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N5	eh	XC6212C36AMR	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9N6	-	XC6209C37AMR	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N6	-	XC6223C16BMR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9N6	eg	XC6209G37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N6	eh	XC6212C37AMR	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9N7	-	XC6209C38AMR	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N7	-	XC6223C17BMR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9N7	eg	XC6209G38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N7	eh	XC6212C38AMR	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9N8	-	XC6209C39AMR	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N8	-	XC6223C18BMR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9N8	eg	XC6209G39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N8	eh	XC6212C39AMR	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9N9	-	XC6209C40AMR	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N9	-	XC6223C19BMR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9N9	eg	XC6209G40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9N9	eh	XC6212C40AMR	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NA	-	XC6209C41AMR	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NA	-	XC6223C20BMR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NA	eg	XC6209G41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NA	eh	XC6212C41AMR	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NB	-	XC6209C42AMR	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NB	-	XC6223C21BMR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NB	eg	XC6209G42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NB	eh	XC6212C42AMR	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NC	-	XC6209C43AMR	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NC	-	XC6223C22BMR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NC	eg	XC6209G43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NC	eh	XC6212C43AMR	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9ND	-	XC6209C44AMR	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9ND	-	XC6223C23BMR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9ND	eg	XC6209G44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9ND	eh	XC6212C44AMR	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NE	-	XC6209C45AMR	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NE	-	XC6223C24BMR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NE	eg	XC6209G45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NE	eh	XC6212C45AMR	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NF	-	XC6209C46AMR	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NF	-	XC6223C25BMR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NF	eg	XC6209G46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NF	eh	XC6212C46AMR	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NH	-	XC6209C47AMR	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NH	-	XC6223C26BMR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NH	eg	XC6209G47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NH	eh	XC6212C47AMR	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NK	-	XC6209C48AMR	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NK	-	XC6223C27BMR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NK	eg	XC6209G48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NK	eh	XC6212C48AMR	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NL	-	XC6209C49AMR	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NL	-	XC6223C28BMR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NL	eg	XC6209G49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NL	eh	XC6212C49AMR	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NM	-	XC6209C50AMR	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NM	-	XC6223C29BMR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NM	eg	XC6209G50AMR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NM	eh	XC6212C50AMR	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NN	-	XC6209C51AMR	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NN	-	XC6223C30BMR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NN	eg	XC6209G51AMR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NN	eh	XC6212C51AMR	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NP	-	XC6209C52AMR	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NP	-	XC6223C31BMR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NP	eg	XC6209G52AMR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NP	eh	XC6212C52AMR	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9NR	-	XC6209C53AMR	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NR	-	XC6223C32BMR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NR	eg	XC6209G53AMR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NR	eh	XC6212C53AMR	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NS	-	XC6209C54AMR	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NS	-	XC6223C33BMR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NS	eg	XC6209G54AMR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NS	eh	XC6212C54AMR	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NT	-	XC6209C55AMR	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NT	-	XC6223C34BMR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NT	eg	XC6209G55AMR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NT	eh	XC6212C55AMR	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NU	-	XC6209C56AMR	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NU	-	XC6223C35BMR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NU	eg	XC6209G56AMR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NU	eh	XC6212C56AMR	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NV	-	XC6209C57AMR	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NV	-	XC6223C36BMR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NV	eg	XC6209G57AMR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NV	eh	XC6212C57AMR	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NX	-	XC6209C58AMR	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NX	-	XC6223C37BMR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NX	eg	XC6209G58AMR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NX	eh	XC6212C58AMR	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NY	-	XC6209C59AMR	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NY	-	XC6223C38BMR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9NY	eg	XC6209G59AMR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9NY	eh	XC6212C59AMR	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9NZ	-	XC6223C39BMR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9P0	-	XC6209D31AMR	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P0	eg	XC6209H31AMR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P0	eh	XC6212D31AMR	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9P0	ej	XC6113E431MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9P1	-	XC6209D32AMR	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P1	eg	XC6209H32AMR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P1	eh	XC6212D32AMR	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9P1	ej	XC6113E432MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9P2	-	XC6209D33AMR	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P2	-	XC6223D121MR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9P2	eg	XC6209H33AMR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P2	eh	XC6212D33AMR	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9P2	ej	XC6113E433MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9P3	-	XC6209D34AMR	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P3	-	XC6223D131MR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9P3	eg	XC6209H34AMR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P3	eh	XC6212D34AMR	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9P3	ej	XC6113E434MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9P4	-	XC6209D35AMR	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P4	-	XC6223D141MR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9P4	eg	XC6209H35AMR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P4	eh	XC6212D35AMR	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9P4	ej	XC6113E435MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9P5	-	XC6209D36AMR	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P5	-	XC6223D151MR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9P5	eg	XC6209H36AMR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P5	eh	XC6212D36AMR	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9P5	ej	XC6113E436MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9P6	-	XC6209D37AMR	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P6	-	XC6223D161MR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9P6	eg	XC6209H37AMR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P6	eh	XC6212D37AMR	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9P6	ej	XC6113E437MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9P7	-	XC6209D38AMR	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P7	-	XC6223D171MR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9P7	eg	XC6209H38AMR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P7	eh	XC6212D38AMR	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9P7	ej	XC6113E438MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9P8	-	XC6209D39AMR	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P8	-	XC6223D181MR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9P8	eg	XC6209H39AMR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9P8	eh	XC6212D39AMR	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9P8	ej	XC6113E439MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9P9	-	XC6209D40AMR	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P9	-	XC6223D191MR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9P9	eg	XC6209H40AMR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9P9	eh	XC6212D40AMR	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9P9	ej	XC6113E440MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PA	-	XC6209D41AMR	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PA	-	XC6223D201MR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PA	eg	XC6209H41AMR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PA	eh	XC6212D41AMR	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PA	ej	XC6113E441MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PB	-	XC6209D42AMR	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PB	-	XC6223D211MR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PB	eg	XC6209H42AMR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PB	eh	XC6212D42AMR	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PB	ej	XC6113E442MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PC	-	XC6209D43AMR	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PC	-	XC6223D221MR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PC	eg	XC6209H43AMR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PC	eh	XC6212D43AMR	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PC	ej	XC6113E443MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PD	-	XC6209D44AMR	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PD	-	XC6223D231MR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PD	eg	XC6209H44AMR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PD	eh	XC6212D44AMR	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PD	ej	XC6113E444MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PE	-	XC6209D45AMR	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PE	-	XC6223D241MR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PE	eg	XC6209H45AMR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PE	eh	XC6212D45AMR	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PE	ej	XC6113E445MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PF	-	XC6209D46AMR	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PF	-	XC6223D251MR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PF	ec	XC6113E416MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PF	eg	XC6209H46AMR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PF	eh	XC6212D46AMR	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PF	ej	XC6113E446MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PH	-	XC6209D47AMR	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PH	-	XC6223D261MR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PH	ec	XC6113E417MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PH	eg	XC6209H47AMR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PH	eh	XC6212D47AMR	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PH	ej	XC6113E447MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PK	-	XC6209D48AMR	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PK	-	XC6223D271MR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PK	ec	XC6113E418MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PK	eg	XC6209H48AMR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PK	eh	XC6212D48AMR	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PK	ej	XC6113E448MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PL	-	XC6209D49AMR	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PL	-	XC6223D281MR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PL	ec	XC6113E419MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PL	eg	XC6209H49AMR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PL	eh	XC6212D49AMR	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PL	ej	XC6113E449MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PM	-	XC6209D50AMR	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PM	-	XC6223D291MR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PM	ec	XC6113E420MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PM	eg	XC6209H50AMR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PM	eh	XC6212D50AMR	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PM	ej	XC6113E450MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PN	-	XC6209D51AMR	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PN	-	XC6223D301MR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PN	ec	XC6113E421MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PN	eg	XC6209H51AMR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PN	eh	XC6212D51AMR	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PP	-	XC6209D52AMR	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PP	-	XC6223D311MR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PP	ec	XC6113E422MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9PP	eg	XC6209H52AMR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PP	eh	XC6212D52AMR	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PR	-	XC6209D53AMR	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PR	-	XC6223D321MR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PR	ec	XC6113E423MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PR	eg	XC6209H53AMR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PR	eh	XC6212D53AMR	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PS	-	XC6209D54AMR	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PS	-	XC6223D331MR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PS	ec	XC6113E424MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PS	eg	XC6209H54AMR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PS	eh	XC6212D54AMR	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PT	-	XC6209D55AMR	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PT	-	XC6223D341MR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PT	ec	XC6113E425MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PT	eg	XC6209H55AMR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PT	eh	XC6212D55AMR	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PU	-	XC6209D56AMR	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PU	-	XC6223D351MR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PU	ec	XC6113E426MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PU	eg	XC6209H56AMR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PU	eh	XC6212D56AMR	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PV	-	XC6209D57AMR	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PV	-	XC6223D361MR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PV	ec	XC6113E427MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PV	eg	XC6209H57AMR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PV	eh	XC6212D57AMR	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PX	-	XC6209D58AMR	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PX	-	XC6223D371MR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PX	ec	XC6113E428MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PX	eg	XC6209H58AMR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PX	eh	XC6212D58AMR	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PY	-	XC6209D59AMR	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PY	-	XC6223D381MR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PY	ec	XC6113E429MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9PY	eg	XC6209H59AMR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9PY	eh	XC6212D59AMR	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9PZ	-	XC6223D391MR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9PZ	ec	XC6113E430MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9Q	-	R1210N291A	DC-DC-IC	PWM step-up, 2.9V, 35..100kHz	SOT-23-5	28sc	DC3	6g	Ric
9R0	-	XC6223D401MR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9R0	ej	XC6113E531MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9R1	ej	XC6113E532MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9R2	ej	XC6113E533MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9R3	ej	XC6113E534MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9R4	ej	XC6113E535MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9R5	ej	XC6113E536MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9R6	ej	XC6113E537MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9R7	ej	XC6113E538MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9R8	ej	XC6113E539MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9R9	ej	XC6113E540MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RA	ej	XC6113E541MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RB	ej	XC6113E542MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RC	ej	XC6113E543MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RD	ej	XC6113E544MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RE	ej	XC6113E545MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RF	ec	XC6113E516MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RF	ej	XC6113E546MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RH	ec	XC6113E517MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RH	ej	XC6113E547MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RK	ec	XC6113E518MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RK	ej	XC6113E548MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RL	ec	XC6113E519MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RL	ej	XC6113E549MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RM	ec	XC6113E520MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RM	ej	XC6113E550MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RN	ec	XC6113E521MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RP	ec	XC6113E522MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RR	ec	XC6113E523MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RS	ec	XC6113E524MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9RT	ec	XC6113E525MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RU	ec	XC6113E526MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RV	ec	XC6113E527MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RX	ec	XC6113E528MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RY	ec	XC6113E529MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9RZ	ec	XC6113E530MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9S	-	RN5RF19AA	LVR-IC	LRip, -CE, 1.9V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
9S0	ej	XC6113E631MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9S1	ej	XC6113E632MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9S2	-	XC6223D12BMR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9S2	ej	XC6113E633MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9S3	-	XC6223D13BMR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9S3	ej	XC6113E634MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9S4	-	XC6223D14BMR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9S4	ej	XC6113E635MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9S5	-	XC6223D15BMR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9S5	ej	XC6113E636MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9S6	-	XC6223D16BMR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9S6	ej	XC6113E637MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9S7	-	XC6223D17BMR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9S7	ej	XC6113E638MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9S8	-	XC6223D18BMR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9S8	ej	XC6113E639MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9S9	-	XC6223D19BMR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9S9	ej	XC6113E640MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SA	-	XC6223D20BMR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SA	ej	XC6113E641MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SB	-	XC6223D21BMR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SB	ej	XC6113E642MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SC	-	XC6223D22BMR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SC	ej	XC6113E643MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SD	-	XC6223D23BMR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SD	ej	XC6113E644MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SE	-	XC6223D24BMR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SE	ej	XC6113E645MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SF	-	XC6223D25BMR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SF	ec	XC6113E616MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SF	ej	XC6113E646MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SH	-	XC6223D26BMR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SH	ec	XC6113E617MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SH	ej	XC6113E647MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SK	-	XC6223D27BMR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SK	ec	XC6113E618MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SK	ej	XC6113E648MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SL	-	XC6223D28BMR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SL	ec	XC6113E619MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SL	ej	XC6113E649MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SM	-	XC6223D29BMR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SM	ec	XC6113E620MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SM	ej	XC6113E650MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SN	-	XC6223D30BMR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SN	ec	XC6113E621MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SP	-	XC6223D31BMR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SP	ec	XC6113E622MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SR	-	XC6223D32BMR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SR	ec	XC6113E623MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SS	-	XC6223D33BMR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SS	ec	XC6113E624MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9ST	-	XC6223D34BMR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9ST	ec	XC6113E625MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SU	-	XC6223D35BMR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SU	ec	XC6113E626MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SV	-	XC6223D36BMR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SV	ec	XC6113E627MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SX	-	XC6223D37BMR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SX	ec	XC6113E628MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SY	-	XC6223D38BMR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SY	ec	XC6113E629MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor
9SZ	-	XC6223D39BMR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
9SZ	ec	XC6113E630MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28cp	VD17	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9T	-	RN5RF19BA	LVR-IC	LRip, +CE, 1.9V±2%, 1A*	SOT-23-5	28vw	VR6	6g	Ric
9T0	ej	XC6113F531MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9T1	ej	XC6113F532MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9T2	-	XC6223E121MR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9T2	ej	XC6113F533MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9T3	-	XC6223E131MR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9T3	ej	XC6113F534MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9T4	-	XC6223E141MR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9T4	ej	XC6113F535MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9T5	-	XC6223E151MR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9T5	ej	XC6113F536MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9T6	-	XC6223E161MR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9T6	ej	XC6113F537MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9T7	-	XC6223E171MR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9T7	ej	XC6113F538MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9T8	-	XC6223E181MR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9T8	ej	XC6113F539MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9T9	-	XC6223E191MR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9T9	ej	XC6113F540MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TA	-	XC6223E201MR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TA	ej	XC6113F541MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TB	-	XC6223E211MR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TB	ej	XC6113F542MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TC	-	XC6223E221MR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TC	ej	XC6113F543MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TD	-	XC6223E231MR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TD	ej	XC6113F544MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TE	-	XC6223E241MR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TE	ej	XC6113F545MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TF	-	XC6223E251MR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TF	ec	XC6113F516MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TF	ej	XC6113F546MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TH	-	XC6223E261MR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TH	ec	XC6113F517MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TH	ej	XC6113F547MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TK	-	XC6223E271MR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TK	ec	XC6113F518MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TK	ej	XC6113F548MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TL	-	XC6223E281MR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TL	ec	XC6113F519MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TL	ej	XC6113F549MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TM	-	XC6223E291MR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TM	ec	XC6113F520MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TM	ej	XC6113F550MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TN	-	XC6223E301MR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TN	ec	XC6113F521MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TP	-	XC6223E311MR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TP	ec	XC6113F522MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TR	-	XC6223E321MR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TR	ec	XC6113F523MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TS	-	XC6223E331MR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TS	ec	XC6113F524MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TT	-	XC6223E341MR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TT	ec	XC6113F525MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TU	-	XC6223E351MR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TU	ec	XC6113F526MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TV	-	XC6223E361MR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TV	ec	XC6113F527MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TX	-	XC6223E371MR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TX	ec	XC6113F528MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TY	-	XC6223E381MR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TY	ec	XC6113F529MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9TZ	-	XC6223E391MR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9TZ	ec	XC6113F530MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9U	-	R1210N291C	DC-DC-IC	PWM step-up, 2.9V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
9U0	-	XC6223E401MR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9U0	ej	XC6113F631MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9U1	ej	XC6113F632MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9U2	ej	XC6113F633MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9U3	ej	XC6113F634MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9U4	ej	XC6113F635MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9U5	ej	XC6113F636MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9U6	ej	XC6113F637MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9U7	ej	XC6113F638MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9U8	ej	XC6113F639MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9U9	ej	XC6113F640MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UA	ej	XC6113F641MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UB	ej	XC6113F642MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UC	ej	XC6113F643MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UD	ej	XC6113F644MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UE	ej	XC6113F645MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UF	ec	XC6113F616MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UF	ej	XC6113F646MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UH	ec	XC6113F617MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UH	ej	XC6113F647MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UK	ec	XC6113F618MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UK	ej	XC6113F648MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UL	ec	XC6113F619MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UL	ej	XC6113F649MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UM	ec	XC6113F620MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UM	ej	XC6113F650MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UN	ec	XC6113F621MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UP	ec	XC6113F622MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UR	ec	XC6113F623MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9US	ec	XC6113F624MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UT	ec	XC6113F625MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UU	ec	XC6113F626MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UV	ec	XC6113F627MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UX	ec	XC6113F628MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UY	ec	XC6113F629MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9UZ	ec	XC6113F630MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28cp	VD17	6g	Tor
9V0	ej	XC6113H631MR	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9V1	ej	XC6113H632MR	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9V2	-	XC6223E12BMR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9V2	ej	XC6113H633MR	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9V3	-	XC6223E13BMR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9V3	ej	XC6113H634MR	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9V4	-	XC6223E14BMR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9V4	ej	XC6113H635MR	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9V5	-	XC6223E15BMR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9V5	ej	XC6113H636MR	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9V6	-	XC6223E16BMR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9V6	ej	XC6113H637MR	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9V7	-	XC6223E17BMR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9V7	ej	XC6113H638MR	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9V8	-	XC6209A092MR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9V8	-	XC6223E18BMR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9V8	eg	XC6209E092MR	LVR-IC	LDO, 0.9V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9V8	eh	XC6212A092MR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9V8	ej	XC6113H639MR	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9V9	-	XC6209A102MR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9V9	-	XC6223E19BMR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9V9	eg	XC6209E102MR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9V9	eh	XC6212A102MR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9V9	ej	XC6113H640MR	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VA	-	XC6209A112MR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VA	-	XC6223E20BMR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VA	eg	XC6209E112MR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VA	eh	XC6212A112MR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VA	ej	XC6113H641MR	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VB	-	XC6209A122MR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VB	-	XC6223E21BMR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VB	eg	XC6209E122MR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VB	eh	XC6212A122MR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VB	ej	XC6113H642MR	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VC	-	XC6209A132MR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VC	-	XC6223E22BMR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VC	eg	XC6209E132MR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VC	eh	XC6212A132MR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VC	ej	XC6113H643MR	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9VD	-	XC6209A142MR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VD	-	XC6223E23BMR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VD	eg	XC6209E142MR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VD	eh	XC6212A142MR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VD	ej	XC6113H644MR	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VE	-	XC6209A152MR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VE	-	XC6223E24BMR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VE	eg	XC6209E152MR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VE	eh	XC6212A152MR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VE	ej	XC6113H645MR	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VF	-	XC6209A162MR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VF	-	XC6223E25BMR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VF	ec	XC6113H616MR	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VF	eg	XC6209E162MR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VF	eh	XC6212A162MR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VF	ej	XC6113H646MR	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VH	-	XC6209A172MR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VH	-	XC6223E26BMR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VH	ec	XC6113H617MR	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VH	eg	XC6209E172MR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VH	eh	XC6212A172MR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VH	ej	XC6113H647MR	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VK	-	XC6209A182MR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VK	-	XC6223E27BMR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VK	ec	XC6113H618MR	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VK	eg	XC6209E182MR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VK	eh	XC6212A182MR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VK	ej	XC6113H648MR	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VL	-	XC6209A192MR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VL	-	XC6223E28BMR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VL	ec	XC6113H619MR	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VL	eg	XC6209E192MR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VL	eh	XC6212A192MR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VL	ej	XC6113H649MR	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VM	-	XC6209A202MR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VM	-	XC6223E29BMR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VM	ec	XC6113H620MR	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VM	eg	XC6209E202MR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VM	eh	XC6212A202MR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VM	ej	XC6113H650MR	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VN	-	XC6209A212MR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VN	-	XC6223E30BMR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VN	ec	XC6113H621MR	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VN	eg	XC6209E212MR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VN	eh	XC6212A212MR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VP	-	XC6209A222MR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VP	-	XC6223E31BMR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VP	ec	XC6113H622MR	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VP	eg	XC6209E222MR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VP	eh	XC6212A222MR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VR	-	XC6209A232MR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VR	-	XC6223E32BMR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VR	ec	XC6113H623MR	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VR	eg	XC6209E232MR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VR	eh	XC6212A232MR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VS	-	XC6209A242MR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VS	-	XC6223E33BMR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VS	ec	XC6113H624MR	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VS	eg	XC6209E242MR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VS	eh	XC6212A242MR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VT	-	XC6209A252MR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VT	-	XC6223E34BMR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VT	ec	XC6113H625MR	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VT	eg	XC6209E252MR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VT	eh	XC6212A252MR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VU	-	XC6209A262MR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VU	-	XC6223E35BMR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VU	ec	XC6113H626MR	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VU	eg	XC6209E262MR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VU	eh	XC6212A262MR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9VV	-	XC6209A272MR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VV	-	XC6223E36BMR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VV	ec	XC6113H627MR	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VV	eg	XC6209E272MR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VV	eh	XC6212A272MR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VX	-	XC6209A282MR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VX	-	XC6223E37BMR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VX	ec	XC6113H628MR	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VX	eg	XC6209E282MR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VX	eh	XC6212A282MR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VY	-	XC6209A292MR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VY	-	XC6223E38BMR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VY	ec	XC6113H629MR	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VY	eg	XC6209E292MR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VY	eh	XC6212A292MR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9VZ	-	XC6209A302MR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VZ	-	XC6223E39BMR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, ICP	SOT-25	28cx	VR4	6g	Tor
9VZ	ec	XC6113H630MR	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28cp	VD17	6g	Tor
9VZ	eg	XC6209E302MR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
9VZ	eh	XC6212A302MR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	SOT-25	28vt	VR4	6g	Tor
9W	-	R1210N391C	DC-DC-IC	PWM step-up, 3.9V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
9X	-	R1210N491C	DC-DC-IC	PWM step-up, 4.9V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
9X2	-	XC6223F121MR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9X3	-	XC6223F131MR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9X4	-	XC6223F141MR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9X5	-	XC6223F151MR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9X6	-	XC6223F161MR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9X7	-	XC6223F171MR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9X8	-	XC6209B092MR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9X8	-	XC6223F181MR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9X8	eg	XC6209F092MR	LVR-IC	LDO, 0.9V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9X8	eh	XC6212B092MR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9X9	-	XC6209B102MR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9X9	-	XC6223F191MR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9X9	eg	XC6209F102MR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9X9	eh	XC6212B102MR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XA	-	XC6209B112MR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XA	-	XC6223F201MR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XA	eg	XC6209F112MR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XA	eh	XC6212B112MR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XB	-	XC6209B122MR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XB	-	XC6223F211MR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XB	eg	XC6209F122MR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XB	eh	XC6212B122MR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XC	-	XC6209B132MR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XC	-	XC6223F221MR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XC	eg	XC6209F132MR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XC	eh	XC6212B132MR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XD	-	XC6209B142MR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XD	-	XC6223F231MR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XD	eg	XC6209F142MR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XD	eh	XC6212B142MR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XE	-	XC6209B152MR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XE	-	XC6223F241MR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XE	eg	XC6209F152MR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XE	eh	XC6212B152MR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XF	-	XC6209B162MR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XF	-	XC6223F251MR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XF	eg	XC6209F162MR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XF	eh	XC6212B162MR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XH	-	XC6209B172MR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XH	-	XC6223F261MR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XH	eg	XC6209F172MR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XH	eh	XC6212B172MR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XK	-	XC6209B182MR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XK	-	XC6223F271MR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XK	eg	XC6209F182MR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XK	eh	XC6212B182MR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XL	-	XC6209B192MR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XL	-	XC6223F281MR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9XL	eg	XC6209F192MR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XL	eh	XC6212B192MR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XM	-	XC6209B202MR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XM	-	XC6223F291MR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XM	eg	XC6209F202MR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XM	eh	XC6212B202MR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XN	-	XC6209B212MR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XN	-	XC6223F301MR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XN	eg	XC6209F212MR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XN	eh	XC6212B212MR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XP	-	XC6209B222MR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XP	-	XC6223F311MR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XP	eg	XC6209F222MR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XP	eh	XC6212B222MR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XR	-	XC6209B232MR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XR	-	XC6223F321MR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XR	eg	XC6209F232MR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XR	eh	XC6212B232MR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XS	-	XC6209B242MR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XS	-	XC6223F331MR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XS	eg	XC6209F242MR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XS	eh	XC6212B242MR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XT	-	XC6209B252MR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XT	-	XC6223F341MR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XT	eg	XC6209F252MR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XT	eh	XC6212B252MR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XU	-	XC6209B262MR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XU	-	XC6223F351MR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XU	eg	XC6209F262MR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XU	eh	XC6212B262MR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XV	-	XC6209B272MR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XV	-	XC6223F361MR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XV	eg	XC6209F272MR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XV	eh	XC6212B272MR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XX	-	XC6209B282MR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XX	-	XC6223F371MR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XX	eg	XC6209F282MR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XX	eh	XC6212B282MR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XY	-	XC6209B292MR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XY	-	XC6223F381MR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XY	eg	XC6209F292MR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XY	eh	XC6212B292MR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9XZ	-	XC6209B302MR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XZ	-	XC6223F391MR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9XZ	eg	XC6209F302MR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Tor
9XZ	eh	XC6212B302MR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-25	28vt	VR4	6g	Tor
9Y	-	R1210N591C	DC-DC-IC	PWM step-up, 5.9V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
9Y0	-	XC6223F401MR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9Y8	-	XC6209C092MR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9Y8	eg	XC6209G092MR	LVR-IC	LDO, 0.9V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9Y8	eh	XC6212C092MR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9Y9	-	XC6209C102MR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9Y9	eg	XC6209G102MR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9Y9	eh	XC6212C102MR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YA	-	XC6209C112MR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YA	eg	XC6209G112MR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YA	eh	XC6212C112MR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YB	-	XC6209C122MR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YB	eg	XC6209G122MR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YB	eh	XC6212C122MR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YC	-	XC6209C132MR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YC	eg	XC6209G132MR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YC	eh	XC6212C132MR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YD	-	XC6209C142MR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YD	eg	XC6209G142MR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YD	eh	XC6212C142MR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YE	-	XC6209C152MR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YE	eg	XC6209G152MR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YE	eh	XC6212C152MR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YF	-	XC6209C162MR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9YF	eg	XC6209G162MR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YF	eh	XC6212C162MR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YH	-	XC6209C172MR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YH	eg	XC6209G172MR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YH	eh	XC6212C172MR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YK	-	XC6209C182MR	LVR-IC	LDO, 1.8V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YK	eg	XC6209G182MR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YK	eh	XC6212C182MR	LVR-IC	LDO, 1.8V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YL	-	XC6209C192MR	LVR-IC	LDO, 1.9V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YL	eg	XC6209G192MR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YL	eh	XC6212C192MR	LVR-IC	LDO, 1.9V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YM	-	XC6209C202MR	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YM	eg	XC6209G202MR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YM	eh	XC6212C202MR	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YN	-	XC6209C212MR	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YN	eg	XC6209G212MR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YN	eh	XC6212C212MR	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YP	-	XC6209C222MR	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YP	eg	XC6209G222MR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YP	eh	XC6212C222MR	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YR	-	XC6209C232MR	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YR	eg	XC6209G232MR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YR	eh	XC6212C232MR	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YS	-	XC6209C242MR	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YS	eg	XC6209G242MR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YS	eh	XC6212C242MR	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YT	-	XC6209C252MR	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YT	eg	XC6209G252MR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YT	eh	XC6212C252MR	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YU	-	XC6209C262MR	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YU	eg	XC6209G262MR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YU	eh	XC6212C262MR	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YV	-	XC6209C272MR	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YV	eg	XC6209G272MR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YV	eh	XC6212C272MR	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YX	-	XC6209C282MR	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YX	eg	XC6209G282MR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YX	eh	XC6212C282MR	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YY	-	XC6209C292MR	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YY	eg	XC6209G292MR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YY	eh	XC6212C292MR	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9YZ	-	XC6209C302MR	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YZ	eg	XC6209G302MR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
9YZ	eh	XC6212C302MR	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PUR	SOT-25	28vt	VR4	6g	Tor
9Z	-	R1210N291D	DC-DC-IC	PWM step-up, 2.9V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
9Z2	-	XC6223F12BMR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9Z3	-	XC6223F13BMR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9Z4	-	XC6223F14BMR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9Z5	-	XC6223F15BMR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9Z6	-	XC6223F16BMR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9Z7	-	XC6223F17BMR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9Z8	-	XC6209D092MR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9Z8	-	XC6223F18BMR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9Z8	eg	XC6209H092MR	LVR-IC	LDO, 0.9V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9Z8	eh	XC6212D092MR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9Z9	-	XC6209D102MR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9Z9	-	XC6223F19BMR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9Z9	eg	XC6209H102MR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9Z9	eh	XC6212D102MR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZA	-	XC6209D112MR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZA	-	XC6223F20BMR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZA	eg	XC6209H112MR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZA	eh	XC6212D112MR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZB	-	XC6209D122MR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZB	-	XC6223F21BMR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZB	eg	XC6209H122MR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZB	eh	XC6212D122MR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZC	-	XC6209D132MR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZC	-	XC6223F22BMR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZC	eg	XC6209H132MR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9ZC	eh	XC6212D132MR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZD	-	XC6209D142MR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZD	-	XC6223F23BMR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZD	eg	XC6209H142MR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZD	eh	XC6212D142MR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZE	-	XC6209D152MR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZE	-	XC6223F24BMR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZE	eg	XC6209H152MR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZE	eh	XC6212D152MR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZF	-	XC6209D162MR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZF	-	XC6223F25BMR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZF	eg	XC6209H162MR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZF	eh	XC6212D162MR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZH	-	XC6209D172MR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZH	-	XC6223F26BMR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZH	eg	XC6209H172MR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZH	eh	XC6212D172MR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZK	-	XC6209D182MR	LVR-IC	LDO, 1.8V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZK	-	XC6223F27BMR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZK	eg	XC6209H182MR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZK	eh	XC6212D182MR	LVR-IC	LDO, 1.8V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZL	-	XC6209D192MR	LVR-IC	LDO, 1.9V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZL	-	XC6223F28BMR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZL	eg	XC6209H192MR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZL	eh	XC6212D192MR	LVR-IC	LDO, 1.9V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZM	-	XC6209D202MR	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZM	-	XC6223F29BMR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZM	eg	XC6209H202MR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZM	eh	XC6212D202MR	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZN	-	XC6209D212MR	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZN	-	XC6223F30BMR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZN	eg	XC6209H212MR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZN	eh	XC6212D212MR	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZP	-	XC6209D222MR	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZP	-	XC6223F31BMR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZP	eg	XC6209H222MR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZP	eh	XC6212D222MR	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZR	-	XC6209D232MR	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZR	-	XC6223F32BMR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZR	eg	XC6209H232MR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZR	eh	XC6212D232MR	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZS	-	XC6209D242MR	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZS	-	XC6223F33BMR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZS	eg	XC6209H242MR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZS	eh	XC6212D242MR	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZT	-	XC6209D252MR	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZT	-	XC6223F34BMR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZT	eg	XC6209H252MR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZT	eh	XC6212D252MR	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZU	-	XC6209D262MR	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZU	-	XC6223F35BMR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZU	eg	XC6209H262MR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZU	eh	XC6212D262MR	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZV	-	XC6209D272MR	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZV	-	XC6223F36BMR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZV	eg	XC6209H272MR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZV	eh	XC6212D272MR	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZX	-	XC6209D282MR	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZX	-	XC6223F37BMR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZX	eg	XC6209H282MR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZX	eh	XC6212D282MR	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZY	-	XC6209D292MR	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZY	-	XC6223F38BMR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZY	eg	XC6209H292MR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZY	eh	XC6212D292MR	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
9ZZ	-	XC6209D302MR	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZZ	-	XC6223F39BMR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL, ICP	SOT-25	28cx	VR4	6g	Tor
9ZZ	eg	XC6209H302MR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Tor
9ZZ	eh	XC6212D302MR	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-25	28vt	VR4	6g	Tor
A0	-	PI74ST1G00CX	CMOS-Log	2-input NAND gate	SC-70-5	28	Log1	6a	Per



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A0	-	PI74ST1G00TX	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6a	Per
A0	-	R1111N201A	LVR-IC	LDO, Low noise, 2.0V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
A0	-	TC1014-4.0VRX	LVR-IC	LDO, 4.0V±2%, 50mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
A0	eu	BL8555-20KQ	LVR-IC	LDO, 2.0V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A0	eu	BL8555-20KRA	LVR-IC	LDO, 2.0V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A0	eu	BL8555-20KRB	LVR-IC	LDO, 2.0V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A0	eu	LR8555-20KQ	LVR-IC	LDO, 2.0V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A0	eu	LR8555-20KRA	LVR-IC	LDO, 2.0V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A0	eu	LR8555-20KRB	LVR-IC	LDO, 2.0V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A0	fg	BL8555-30KQ	LVR-IC	LDO, 3.0V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A0	fg	BL8555-30KRA	LVR-IC	LDO, 3.0V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A0	fg	BL8555-30KRB	LVR-IC	LDO, 3.0V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A0	fg	LR8555-30KQ	LVR-IC	LDO, 3.0V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A0	fg	LR8555-30KRA	LVR-IC	LDO, 3.0V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A0	fg	LR8555-30KRB	LVR-IC	LDO, 3.0V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A0	fh	BL8555-40KQ	LVR-IC	LDO, 4.0V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A0	fh	BL8555-40KRA	LVR-IC	LDO, 4.0V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A0	fh	BL8555-40KRB	LVR-IC	LDO, 4.0V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A0	fh	LR8555-40KQ	LVR-IC	LDO, 4.0V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A0	fh	LR8555-40KRA	LVR-IC	LDO, 4.0V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A0	fh	LR8555-40KRB	LVR-IC	LDO, 4.0V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A0	fi	BL8555-50KQ	LVR-IC	LDO, 5.0V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A0	fi	BL8555-50KRA	LVR-IC	LDO, 5.0V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A0	fi	BL8555-50KRB	LVR-IC	LDO, 5.0V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A0	fi	LR8555-50KQ	LVR-IC	LDO, 5.0V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A0	fi	LR8555-50KRA	LVR-IC	LDO, 5.0V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A0	fi	LR8555-50KRB	LVR-IC	LDO, 5.0V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A0	fk	BL8555-30AQ	LVR-IC	LDO, 3.0V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A0	fk	BL8555-30ARA	LVR-IC	LDO, 3.0V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A0	fk	BL8555-30ARB	LVR-IC	LDO, 3.0V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A0	fk	LR8555-30AQ	LVR-IC	LDO, 3.0V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A0	fk	LR8555-30ARA	LVR-IC	LDO, 3.0V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A0	fk	LR8555-30ARB	LVR-IC	LDO, 3.0V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A0	fm	BL8555-40AQ	LVR-IC	LDO, 4.0V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A0	fm	BL8555-40ARA	LVR-IC	LDO, 4.0V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A0	fm	BL8555-40ARB	LVR-IC	LDO, 4.0V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A0	fm	LR8555-40AQ	LVR-IC	LDO, 4.0V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A0	fm	LR8555-40ARA	LVR-IC	LDO, 4.0V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A0	fm	LR8555-40ARB	LVR-IC	LDO, 4.0V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A0	fn	BL8555-50AQ	LVR-IC	LDO, 5.0V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A0	fn	BL8555-50ARA	LVR-IC	LDO, 5.0V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A0	fn	BL8555-50ARB	LVR-IC	LDO, 5.0V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A0	fn	LR8555-50AQ	LVR-IC	LDO, 5.0V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A0	fn	LR8555-50ARA	LVR-IC	LDO, 5.0V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A0	fn	LR8555-50ARB	LVR-IC	LDO, 5.0V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A0	fp	BL8555-20AQ	LVR-IC	LDO, 2.0V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A0	fp	BL8555-20ARA	LVR-IC	LDO, 2.0V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A0	fp	BL8555-20ARB	LVR-IC	LDO, 2.0V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A0	fp	LR8555-20AQ	LVR-IC	LDO, 2.0V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A0	fp	LR8555-20ARA	LVR-IC	LDO, 2.0V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A0	fp	LR8555-20ARB	LVR-IC	LDO, 2.0V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A0-	-	RT9193-17PU5	LVR-IC	LDO, 1.7V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
A00	-	74AHC1G00GV	CMOS-Log	2-input NAND gate	SOT753	28	Log1	6a	Nxp
A00	-	U74AHC1G00-AF5	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6a	Utc
A00	-	U74AHC1G00-AL5	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6a	Utc
A00	ej	XC6114A131MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A001	-	R3117Q072A	Vdet-IC	0.7V±15mV, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A002	-	R3117Q082A	Vdet-IC	0.8V±15mV, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A003	-	R3117Q092A	Vdet-IC	0.9V±15mV, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A004	-	R3117Q102A	Vdet-IC	1.0V±15mV, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A005	-	R3117Q112A	Vdet-IC	1.1V±15mV, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A006	-	R3117Q122A	Vdet-IC	1.2V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A007	-	R3117Q132A	Vdet-IC	1.3V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A008	-	R3117Q142A	Vdet-IC	1.4V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A009	-	R3117Q152A	Vdet-IC	1.5V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A00L	-	U74AHC1G00L-AF5	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6a	Utc
A00L	-	U74AHC1G00L-AL5	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6a	Utc
A01	ej	XC6114A132MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A010	-	R3117Q162A	Vdet-IC	1.6V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A011	-	R3117Q172A	Vdet-IC	1.7V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A012	-	R3117Q182A	Vdet-IC	1.8V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A013	-	R3117Q192A	Vdet-IC	1.9V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A014	-	R3117Q202A	Vdet-IC	2.0V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A015	-	R3117Q212A	Vdet-IC	2.1V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A016	-	R3117Q222A	Vdet-IC	2.2V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A017	-	R3117Q232A	Vdet-IC	2.3V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A018	-	R3117Q242A	Vdet-IC	2.4V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A019	-	R3117Q252A	Vdet-IC	2.5V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A02	-	74AHC1G02GV	CMOS-Log	2-input NOR gate	SOT753	28	Log2	6a	Nxp
A02	-	U74AHC1G02-AF5	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6a	Utc
A02	-	U74AHC1G02-AL5	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6a	Utc
A02	ej	XC6114A133MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A020	-	R3117Q262A	Vdet-IC	2.6V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A021	-	R3117Q272A	Vdet-IC	2.7V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A022	-	R3117Q282A	Vdet-IC	2.8V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A023	-	R3117Q292A	Vdet-IC	2.9V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A024	-	R3117Q302A	Vdet-IC	3.0V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A025	-	R3117Q312A	Vdet-IC	3.1V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A026	-	R3117Q322A	Vdet-IC	3.2V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A027	-	R3117Q332A	Vdet-IC	3.3V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A028	-	R3117Q342A	Vdet-IC	3.4V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A029	-	R3117Q352A	Vdet-IC	3.5V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A02L	-	U74AHC1G02L-AF5	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6a	Utc
A02L	-	U74AHC1G02L-AL5	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6a	Utc
A03	ej	XC6114A134MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A030	-	R3117Q362A	Vdet-IC	3.6V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A031	-	R3117Q372A	Vdet-IC	3.7V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A032	-	R3117Q382A	Vdet-IC	3.8V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A033	-	R3117Q392A	Vdet-IC	3.9V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A034	-	R3117Q402A	Vdet-IC	4.0V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A035	-	R3117Q412A	Vdet-IC	4.1V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A036	-	R3117Q422A	Vdet-IC	4.2V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A037	-	R3117Q432A	Vdet-IC	4.3V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A038	-	R3117Q442A	Vdet-IC	4.4V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A039	-	R3117Q452A	Vdet-IC	4.5V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A04	-	74AHC1G04GV	CMOS-Log	Inverter	SOT753	28	Log6	6a	Nxp
A04	-	U74AHC1G04-AF5	CMOS-Log	Inverter	SOT-23-5	28	Log6	6a	Utc
A04	-	U74AHC1G04-AL5	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Utc
A04	ej	XC6114A135MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A040	-	R3117Q462A	Vdet-IC	4.6V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A041	-	R3117Q472A	Vdet-IC	4.7V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A042	-	R3117Q482A	Vdet-IC	4.8V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A043	-	R3117Q492A	Vdet-IC	4.9V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A044	-	R3117Q502A	Vdet-IC	5.0V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
A04L	-	U74AHC1G04L-AF5	CMOS-Log	Inverter	SOT-23-5	28	Log6	6a	Utc
A04L	-	U74AHC1G04L-AL5	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Utc
A05	ej	XC6114A136MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A06	-	74AHC1G06GV	CMOS-Log	Inverter (ODO)	SOT753	28	Log19	6a	Nxp
A06	ej	XC6114A137MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A07	-	74AHC1G07GV	CMOS-Log	Noninverting buffer/driver (ODO)	SOT753	28	Log8	6a	Nxp
A07	ej	XC6114A138MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A08	-	74AHC1G08GV	CMOS-Log	2-input AND gate	SOT753	28	Log3	6a	Nxp
A08	-	RP110N081B	LVR-IC	LDO, 0.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A08	-	SN74AHC1G08DBV	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6g	Ti
A08	-	U74AHC1G08-AF5	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6a	Utc
A08	-	U74AHC1G08-AL5	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Utc
A08	ej	XC6114A139MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A08G	-	U74AHC1G08G-AF5	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6a	Utc
A08G	-	U74AHC1G08G-AL5	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Utc
A08L	-	U74AHC1G08L-AF5	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6a	Utc
A08L	-	U74AHC1G08L-AL5	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Utc
A09	-	74AHC1G09GV	CMOS-Log	2-input AND gate (ODO)	SOT753	28	Log9	6a	Nxp
A09	-	RP110N091B	LVR-IC	LDO, 0.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A09	ej	XC6114A140MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0A	ej	XC6114A141MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0B	ej	XC6114A142MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0C	ej	XC6114A143MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0D	ej	XC6114A144MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0E	ej	XC6114A145MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0F	ec	XC6114A116MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A0F	ej	XC6114A146MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0H	ec	XC6114A117MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0H	ej	XC6114A147MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0K	ec	XC6114A118MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0K	ej	XC6114A148MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0L	ec	XC6114A119MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0L	ej	XC6114A149MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0M	ec	XC6114A120MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0M	ej	XC6114A150MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0N	ec	XC6114A121MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0P	ec	XC6114A122MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0R	ec	XC6114A123MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0S	ec	XC6114A124MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0T	ec	XC6114A125MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0U	ec	XC6114A126MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0V	ec	XC6114A127MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0X	ec	XC6114A128MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0Y	ec	XC6114A129MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A0Z	ec	XC6114A130MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
a1	-	BD45E475G-M	Vdet-IC	4.7V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
A1	-	1SS308	Si-diode	Quad, Sw, Fast, 85V, 100mA, <2pF, <4ns	SOT-25	28	D16	6a	Tos
A1	-	HD74ALVC1G00VS	CMOS-Log	2-input NAND gate	VSON-5	30	Log1	6a	Ren
A1	-	R1111N211A	LVR-IC	LDO, Low noise, 2.1V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
A1	-	TC1014-2.5VRX	LVR-IC	LDO, 2.5V±2%, 50mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
A1	eu	BL8555-21KQ	LVR-IC	LDO, 2.1V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A1	eu	BL8555-21KRA	LVR-IC	LDO, 2.1V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A1	eu	BL8555-21KRB	LVR-IC	LDO, 2.1V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A1	eu	LR8555-21KQ	LVR-IC	LDO, 2.1V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A1	eu	LR8555-21KRA	LVR-IC	LDO, 2.1V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A1	eu	LR8555-21KRB	LVR-IC	LDO, 2.1V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A1	fg	BL8555-31KQ	LVR-IC	LDO, 3.1V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A1	fg	BL8555-31KRA	LVR-IC	LDO, 3.1V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A1	fg	BL8555-31KRB	LVR-IC	LDO, 3.1V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A1	fg	LR8555-31KQ	LVR-IC	LDO, 3.1V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A1	fg	LR8555-31KRA	LVR-IC	LDO, 3.1V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A1	fg	LR8555-31KRB	LVR-IC	LDO, 3.1V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A1	fh	BL8555-41KQ	LVR-IC	LDO, 4.1V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A1	fh	BL8555-41KRA	LVR-IC	LDO, 4.1V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A1	fh	BL8555-41KRB	LVR-IC	LDO, 4.1V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A1	fh	LR8555-41KQ	LVR-IC	LDO, 4.1V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A1	fh	LR8555-41KRA	LVR-IC	LDO, 4.1V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A1	fh	LR8555-41KRB	LVR-IC	LDO, 4.1V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A1	fk	BL8555-31AQ	LVR-IC	LDO, 3.1V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A1	fk	BL8555-31ARA	LVR-IC	LDO, 3.1V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A1	fk	BL8555-31ARB	LVR-IC	LDO, 3.1V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A1	fk	LR8555-31AQ	LVR-IC	LDO, 3.1V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A1	fk	LR8555-31ARA	LVR-IC	LDO, 3.1V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A1	fk	LR8555-31ARB	LVR-IC	LDO, 3.1V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A1	fm	BL8555-41AQ	LVR-IC	LDO, 4.1V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A1	fm	BL8555-41ARA	LVR-IC	LDO, 4.1V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A1	fm	BL8555-41ARB	LVR-IC	LDO, 4.1V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A1	fm	LR8555-41AQ	LVR-IC	LDO, 4.1V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A1	fm	LR8555-41ARA	LVR-IC	LDO, 4.1V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A1	fm	LR8555-41ARB	LVR-IC	LDO, 4.1V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A1	fp	BL8555-21AQ	LVR-IC	LDO, 2.1V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A1	fp	BL8555-21ARA	LVR-IC	LDO, 2.1V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A1	fp	BL8555-21ARB	LVR-IC	LDO, 2.1V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A1	fp	LR8555-21AQ	LVR-IC	LDO, 2.1V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A1	fp	LR8555-21ARA	LVR-IC	LDO, 2.1V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A1	fp	LR8555-21ARB	LVR-IC	LDO, 2.1V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A1-	-	RT9193-33PU5	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
A1=	-	RT9193-33GU5	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
A10	-	FMA10A	Si-pnp-Digi	Dual, 50V, 100mA, 300mW, 250MHz, R1/R2=1k/10k	SC-74A	28	TD9	6a	Rhm
A10	-	RP110N101B	LVR-IC	LDO, 1.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A10	-	UMA10N	Si-pnp-Digi	Dual, 50V, 100mA, 150mW, 250MHz, R1/R2=1k/10k	SOT-353	28	TD9	6a	Rhm
A10	ej	XC6114A231MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A11	-	EMA11	Si-pnp-Digi	Dual, 50V, 100mA, 150mW, 250MHz, R1/R2=4.7k/47k	SC-88A	28	TD9	6a	Rhm
A11	-	FMA11A	Si-pnp-Digi	Dual, 50V, 100mA, 300mW, 250MHz, R1/R2=4.7k/47k	SC-74A	28	TD9	6a	Rhm
A11	-	MIC6211BM5	Op-IC	GP, ±4..±16V, Icco=1.3mA, 2.5MHz, 6V/µs	SOT-23-5	28opa	OP1	6g	Mcr
A11	-	RP110N111B	LVR-IC	LDO, 1.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A11	-	UMA11N	Si-pnp-Digi	Dual, 50V, 100mA, 150mW, 250MHz, R1/R2=4.7k/47k	SC-88A	28	TD9	6a	Rhm
A11	ej	XC6114A232MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A11	fc	MIC6211BM5	Op-IC	GP, ±4..±16V, Icco=1.3mA, 2.5MHz, 6V/µs, Pb-free	SOT-23-5	28opa	OP1	6g	Mcr
A12	-	RP110N121B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A12	ej	XC6114A233MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A13	-	MIC7111BM5	Op-IC	Rail-to-Rail I/O, 1.8..11V, Icco=15µA, 25kHz	SOT-23-5	28opb	OP1	6g	Mcr
A13	-	RP110N131B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A13	ej	XC6114A234MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A14	-	74AHC1G14GV	CMOS-Log	Inverting Schmitt-trigger	SOT753	28	Log7	6a	Nxp
A14	-	MIC7211BM5	Comp-IC	µPower, 2.2..10V, Vgo=120dB, PPO	SOT-23-5	28opb	OP1	6g	Mcr
A14	-	RP110N141B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A14	ej	XC6114A235MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A14	fc	MIC7211YM5	Comp-IC	µPower, 2.2..10V, Vgo=120dB, PPO, Pb-free	SOT-23-5	28opb	OP1	6g	Mcr
A15	-	MIC7221BM5	Comp-IC	µPower, 2.2..10V, Vgo=120dB, ODO	SOT-23-5	28opb	OP1	6g	Mcr
A15	-	RP110N151B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A15	eb	XC6367A152MR	DC-DC-IC	PWM step-up, 1.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A15	ej	XC6114A236MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A15	ek	XC6365A152MR	DC-DC-IC	PWM st-down, 180kHz, 1.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A15	fc	MIC7221YM5	Comp-IC	µPower, 2.2..10V, Vgo=120dB, ODO, Pb-free	SOT-23-5	28opb	OP1	6g	Mcr
A15A	-	FS8853A-15CA	LVR-IC	LDO, 1.5V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A15B	-	FS8853A-15CB	LVR-IC	LDO, 1.5V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A15C	-	FS8853A-15CC	LVR-IC	LDO, 1.5V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A16	-	CLC404AJM5	Op-IC	Wide-band, High-Slew Rate, ±5V, 165MHz	SOT-23-5	28opa	OP1	6a	Nsc
A16	-	RP110N161B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A16	eb	XC6367A162MR	DC-DC-IC	PWM step-up, 1.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A16	ej	XC6114A237MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A16	ek	XC6365A162MR	DC-DC-IC	PWM st-down, 180kHz, 1.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A16A	-	FS8853A-16CA	LVR-IC	LDO, 1.6V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A16B	-	FS8853A-16CB	LVR-IC	LDO, 1.6V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A16C	-	FS8853A-16CC	LVR-IC	LDO, 1.6V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A17	-	CLC406AJM5	Op-IC	Wide-band LP, ±1.5V..±6V, 1500V/µs, 50mW, Iout=70mA	SOT-23-5	28opa	OP1	6a	Nsc
A17	-	RP110N171B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A17	eb	XC6367A172MR	DC-DC-IC	PWM step-up, 1.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A17	ej	XC6114A238MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A17	ek	XC6365A172MR	DC-DC-IC	PWM st-down, 180kHz, 1.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A17A	-	FS8853A-17CA	LVR-IC	LDO, 1.7V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A17B	-	FS8853A-17CB	LVR-IC	LDO, 1.7V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A17C	-	FS8853A-17CC	LVR-IC	LDO, 1.7V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A18	-	CLC409AJM5	Op-IC	Very WB, Low-distortion,, ±5V, 350MHz	SOT-23-5	28opa	OP1	6a	Nsc
A18	-	RP110N181B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A18	eb	XC6367A182MR	DC-DC-IC	PWM step-up, 1.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A18	ej	XC6114A239MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A18	ek	XC6365A182MR	DC-DC-IC	PWM st-down, 180kHz, 1.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A18A	-	FS8853A-18CA	LVR-IC	LDO, 1.8V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A18B	-	FS8853A-18CB	LVR-IC	LDO, 1.8V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A18C	-	FS8853A-18CC	LVR-IC	LDO, 1.8V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A19	-	CLC425AJM5	Op-IC	Ultra LN, WB, ±5V, 1.9GHz	SOT-23-5	28opa	OP1	6a	Nsc
A19	-	RP110N191B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A19	eb	XC6367A192MR	DC-DC-IC	PWM step-up, 1.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A19	ej	XC6114A240MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A19	ek	XC6365A192MR	DC-DC-IC	PWM st-down, 180kHz, 1.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A19A	-	FS8853A-19CA	LVR-IC	LDO, 1.9V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A19B	-	FS8853A-19CB	LVR-IC	LDO, 1.9V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A19C	-	FS8853A-19CC	LVR-IC	LDO, 1.9V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A1A	-	APR3101-15B	Vdet-IC	1.5V±1.5%, -MR, -Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A1A	ej	XC6114A241MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1A	ek	XC6365A203MR	DC-DC-IC	PWM st-down, 300kHz, 2.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A1B	-	APR3101-17B	Vdet-IC	1.75V±1.5%, -MR, -Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A1B	ej	XC6114A242MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1C	-	APR3101-23B	Vdet-IC	2.32V±1.5%, -MR, -Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A1C	ej	XC6114A243MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1D	-	APR3101-26B	Vdet-IC	2.63V±1.5%, -MR, -Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A1D	ej	XC6114A244MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1E	-	APR3101-29B	Vdet-IC	2.93V±1.5%, -MR, -Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A1E	-	LN2351P1512S	DC-DC-IC	PFM step-up, 1.5V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A1E	ej	XC6114A245MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1F	-	APR3101-30B	Vdet-IC	3.08V±1.5%, -MR, -Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A1F	-	iDS930115A50	LVR-IC	LDO, 1.5V±2.0%, 400mA, +CE	SOT-23-5	28cx	VR4	6k	Ids
A1F	-	iDS930115C50	LVR-IC	LDO, 1.5V±2.0%, 400mA, +CE	SC-70-5	28cx	VR4	6g	Ids
A1F	-	LN2351P1612S	DC-DC-IC	PFM step-up, 1.6V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A1F	eb	XC6367A153MR	DC-DC-IC	PWM step-up, 1.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A1F	ec	XC6114A216MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1F	ej	XC6114A246MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1F	ek	XC6365A153MR	DC-DC-IC	PWM st-down, 300kHz, 1.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A1G	-	APR3101-39B	Vdet-IC	3.9V±1.5%, -MR, -Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A1H	-	APR3101-43B	Vdet-IC	4.38V±1.5%, -MR, -Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A1H	-	iDS930118A50	LVR-IC	LDO, 1.8V±2.0%, 400mA, +CE	SOT-23-5	28cx	VR4	6k	Ids
A1H	-	iDS930118C50	LVR-IC	LDO, 1.8V±2.0%, 400mA, +CE	SC-70-5	28cx	VR4	6g	Ids
A1H	-	LN2351P1712S	DC-DC-IC	PFM step-up, 1.7V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A1H	eb	XC6367A163MR	DC-DC-IC	PWM step-up, 1.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A1H	ec	XC6114A217MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1H	ej	XC6114A247MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1H	ek	XC6365A163MR	DC-DC-IC	PWM st-down, 300kHz, 1.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A1J	-	APR3101-46B	Vdet-IC	4.63V±1.5%, -MR, -Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A1K	-	iDS930130A50	LVR-IC	LDO, 3.0V±2.0%, 400mA, +CE	SOT-23-5	28cx	VR4	6k	Ids
A1K	-	iDS930130C50	LVR-IC	LDO, 3.0V±2.0%, 400mA, +CE	SC-70-5	28cx	VR4	6g	Ids
A1K	-	LN2351P1812S	DC-DC-IC	PFM step-up, 1.8V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A1K	eb	XC6367A173MR	DC-DC-IC	PWM step-up, 1.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A1K	ec	XC6114A218MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1K	ej	XC6114A248MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1K	ek	XC6365A173MR	DC-DC-IC	PWM st-down, 300kHz, 1.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A1L	-	iDS930125A50	LVR-IC	LDO, 2.5V±2.0%, 400mA, +CE	SOT-23-5	28cx	VR4	6k	Ids
A1L	-	iDS930125C50	LVR-IC	LDO, 2.5V±2.0%, 400mA, +CE	SC-70-5	28cx	VR4	6g	Ids
A1L	-	LN2351P1912S	DC-DC-IC	PFM step-up, 1.9V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A1L	eb	XC6367A183MR	DC-DC-IC	PWM step-up, 1.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A1L	ec	XC6114A219MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1L	ej	XC6114A249MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1L	ek	XC6365A183MR	DC-DC-IC	PWM st-down, 300kHz, 1.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A1M	-	LN2351P2012S	DC-DC-IC	PFM st-up, 2.0V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A1M	eb	XC6367A193MR	DC-DC-IC	PWM step-up, 1.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A1M	ec	XC6114A220MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1M	ej	XC6114A250MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1M	ek	XC6365A193MR	DC-DC-IC	PWM st-down, 300kHz, 1.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A1N	-	LN2351P2112S	DC-DC-IC	PFM st-up, 2.1V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A1N	ec	XC6114A221MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1O	-	iDS930128A50	LVR-IC	LDO, 2.8V±2.0%, 400mA, +CE	SOT-23-5	28cx	VR4	6k	Ids
A1O	-	iDS930128C50	LVR-IC	LDO, 2.8V±2.0%, 400mA, +CE	SC-70-5	28cx	VR4	6g	Ids
A1P	-	LN2351P2212S	DC-DC-IC	PFM st-up, 2.2V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A1P	ec	XC6114A222MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1R	-	LN2351P2312S	DC-DC-IC	PFM st-up, 2.3V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A1R	ec	XC6114A223MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1S	-	iDS930127A50	LVR-IC	LDO, 2.7V±2.0%, 400mA, +CE	SOT-23-5	28cx	VR4	6k	Ids
A1S	-	iDS930127C50	LVR-IC	LDO, 2.7V±2.0%, 400mA, +CE	SC-70-5	28cx	VR4	6g	Ids
A1S	-	LN2351P2412S	DC-DC-IC	PFM st-up, 2.4V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A1S	ec	XC6114A224MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1T	-	iDS930133A50	LVR-IC	LDO, 3.3V±2.0%, 400mA, +CE	SOT-23-5	28cx	VR4	6k	Ids
A1T	-	iDS930133C50	LVR-IC	LDO, 3.3V±2.0%, 400mA, +CE	SC-70-5	28cx	VR4	6g	Ids
A1T	-	LN2351P2512S	DC-DC-IC	PFM st-up, 2.5V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A1T	ec	XC6114A225MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1U	-	iDS9301285A50	LVR-IC	LDO, 2.85V±2.0%, 400mA, +CE	SOT-23-5	28cx	VR4	6k	Ids
A1U	-	iDS9301285C50	LVR-IC	LDO, 2.85V±2.0%, 400mA, +CE	SC-70-5	28cx	VR4	6g	Ids
A1U	-	LN2351P2612S	DC-DC-IC	PFM st-up, 2.6V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A1U	ec	XC6114A226MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1V	-	iDS930131A50	LVR-IC	LDO, 3.1V±2.0%, 400mA, +CE	SOT-23-5	28cx	VR4	6k	Ids
A1V	-	iDS930131C50	LVR-IC	LDO, 3.1V±2.0%, 400mA, +CE	SC-70-5	28cx	VR4	6g	Ids
A1V	-	LN2351P2712S	DC-DC-IC	PFM st-up, 2.7V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A1V	ec	XC6114A227MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1X	-	iDS930132A50	LVR-IC	LDO, 3.2V±2.0%, 400mA, +CE	SOT-23-5	28cx	VR4	6k	Ids
A1X	-	iDS930132C50	LVR-IC	LDO, 3.2V±2.0%, 400mA, +CE	SC-70-5	28cx	VR4	6g	Ids
A1X	-	LN2351P2812S	DC-DC-IC	PFM st-up, 2.8V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A1X	ec	XC6114A228MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1Y	-	iDS930135A50	LVR-IC	LDO, 3.5V±2.0%, 400mA, +CE	SOT-23-5	28cx	VR4	6k	Ids
A1Y	-	iDS930135C50	LVR-IC	LDO, 3.5V±2.0%, 400mA, +CE	SC-70-5	28cx	VR4	6g	Ids
A1Y	-	LN2351P2912S	DC-DC-IC	PFM st-up, 2.9V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A1Y	ec	XC6114A229MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A1Z	-	LN2351P3012S	DC-DC-IC	PFM st-up, 3.0V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A1Z	ec	XC6114A230MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
a2	-	BD45E485G-M	Vdet-IC	4.8V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
A2	-	1SS309	Si-diode	Quad, Sw, Fast, 85V, 100mA, <2pF, <4ns	SOT-25	28bh	-	6a	Tos
A2	-	AP431Q	Vref-IC	Adjustable, Precision, Shunt, 2.495V±1%	SOT-23-5	28re	RF1	6k	Ana



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A2	-	BL8555-12AQ	LVR-IC	LDO, 1.2V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A2	-	BL8555-12ARA	LVR-IC	LDO, 1.2V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A2	-	BL8555-12ARB	LVR-IC	LDO, 1.2V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A2	-	HD74ALVC1G08VS	CMOS-Log	2-input AND gate	VSON-5	30	Log3	6a	Ren
A2	-	LR8555-12AQ	LVR-IC	LDO, 1.2V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A2	-	LR8555-12ARA	LVR-IC	LDO, 1.2V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A2	-	LR8555-12ARB	LVR-IC	LDO, 1.2V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A2	-	NLAS4501DF	CMOS-Log	Single-pole single-throw analog switch	SC-70-5	28	Log16	6b	Ons
A2	-	NLAS4501DT	CMOS-Log	Single-pole single-throw analog switch	SOT-23-5	28	Log16	6b	Ons
A2	-	PI74ST1G02CX	CMOS-Log	2-input NOR gate	SC-70-5	28	Log2	6a	Per
A2	-	PI74ST1G02TX	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6a	Per
A2	-	R1111N221A	LVR-IC	LDO, Low noise, 2.2V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
A2	-	TC1014-2.7VRX	LVR-IC	LDO, 2.7V±2%, 50mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
A2	ea	BL8555-12KQ	LVR-IC	LDO, 1.2V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A2	ea	BL8555-12KRA	LVR-IC	LDO, 1.2V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A2	ea	BL8555-12KRB	LVR-IC	LDO, 1.2V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A2	ea	LR8555-12KQ	LVR-IC	LDO, 1.2V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A2	ea	LR8555-12KRA	LVR-IC	LDO, 1.2V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A2	ea	LR8555-12KRB	LVR-IC	LDO, 1.2V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A2	eu	BL8555-22KQ	LVR-IC	LDO, 2.2V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A2	eu	BL8555-22KRA	LVR-IC	LDO, 2.2V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A2	eu	BL8555-22KRB	LVR-IC	LDO, 2.2V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A2	eu	LR8555-22KQ	LVR-IC	LDO, 2.2V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A2	eu	LR8555-22KRA	LVR-IC	LDO, 2.2V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A2	eu	LR8555-22KRB	LVR-IC	LDO, 2.2V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A2	fg	BL8555-32KQ	LVR-IC	LDO, 3.2V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A2	fg	BL8555-32KRA	LVR-IC	LDO, 3.2V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A2	fg	BL8555-32KRB	LVR-IC	LDO, 3.2V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A2	fg	LR8555-32KQ	LVR-IC	LDO, 3.2V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A2	fg	LR8555-32KRA	LVR-IC	LDO, 3.2V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A2	fg	LR8555-32KRB	LVR-IC	LDO, 3.2V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A2	fh	BL8555-42KQ	LVR-IC	LDO, 4.2V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A2	fh	BL8555-42KRA	LVR-IC	LDO, 4.2V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A2	fh	BL8555-42KRB	LVR-IC	LDO, 4.2V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A2	fh	LR8555-42KQ	LVR-IC	LDO, 4.2V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A2	fh	LR8555-42KRA	LVR-IC	LDO, 4.2V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A2	fh	LR8555-42KRB	LVR-IC	LDO, 4.2V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A2	fk	BL8555-32AQ	LVR-IC	LDO, 3.2V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A2	fk	BL8555-32ARA	LVR-IC	LDO, 3.2V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A2	fk	BL8555-32ARB	LVR-IC	LDO, 3.2V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A2	fk	LR8555-32AQ	LVR-IC	LDO, 3.2V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A2	fk	LR8555-32ARA	LVR-IC	LDO, 3.2V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A2	fk	LR8555-32ARB	LVR-IC	LDO, 3.2V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A2	fm	BL8555-42AQ	LVR-IC	LDO, 4.2V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A2	fm	BL8555-42ARA	LVR-IC	LDO, 4.2V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A2	fm	BL8555-42ARB	LVR-IC	LDO, 4.2V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A2	fm	LR8555-42AQ	LVR-IC	LDO, 4.2V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A2	fm	LR8555-42ARA	LVR-IC	LDO, 4.2V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A2	fm	LR8555-42ARB	LVR-IC	LDO, 4.2V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A2	fp	BL8555-22AQ	LVR-IC	LDO, 2.2V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A2	fp	BL8555-22ARA	LVR-IC	LDO, 2.2V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A2	fp	BL8555-22ARB	LVR-IC	LDO, 2.2V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A2	fp	LR8555-22AQ	LVR-IC	LDO, 2.2V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A2	fp	LR8555-22ARA	LVR-IC	LDO, 2.2V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A2	fp	LR8555-22ARB	LVR-IC	LDO, 2.2V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A2-	-	RT9193-18PU5	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
A20	-	CLC450AJM5	Op-IC	Lo-power, Current Feedback, ±5V, 100MHz	SOT-23-5	28opa	OP1	6a	Nsc
A20	-	LMV721M7	Op-IC	Low noise, Vcc=2.7..5V, 10MHz, 2V/µs	SOT-23-5	28opa	OP1	6g	Nsc
A20	-	LN2351P3112S	DC-DC-IC	PFM st-up, 3.1V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A20	-	RP110N201B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A20	eb	XC6367A202MR	DC-DC-IC	PWM step-up, 2.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A20	ej	XC6114A331MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A20	ek	XC6365A202MR	DC-DC-IC	PWM st-down, 180kHz, 2.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A20A	-	FS8853A-20CA	LVR-IC	LDO, 2.0V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A20B	-	FS8853A-20CB	LVR-IC	LDO, 2.0V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A20C	-	FS8853A-20CC	LVR-IC	LDO, 2.0V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A21	-	CLC452AJM5	Op-IC	Lo-power, Current Feedback, ±5V, 130MHz	SOT-23-5	28opa	OP1	6a	Nsc
A21	-	LN2351P3212S	DC-DC-IC	PFM st-up, 3.2V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A21	-	RP110N211B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A21	eb	XC6367A212MR	DC-DC-IC	PWM step-up, 2.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A21	ej	XC6114A332MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A21	ek	XC6365A212MR	DC-DC-IC	PWM st-down, 180kHz, 2.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A21A	-	FS8853A-21CA	LVR-IC	LDO, 2.1V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A21B	-	FS8853A-21CB	LVR-IC	LDO, 2.1V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A21C	-	FS8853A-21CC	LVR-IC	LDO, 2.1V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A22	-	LN2351P3312S	DC-DC-IC	PFM st-up, 3.3V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A22	-	RP110N221B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A22	eb	XC6367A222MR	DC-DC-IC	PWM step-up, 2.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A22	ej	XC6114A333MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A22	ek	XC6365A222MR	DC-DC-IC	PWM st-down, 180kHz, 2.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A22A	-	FS8853A-22CA	LVR-IC	LDO, 2.2V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A22B	-	FS8853A-22CB	LVR-IC	LDO, 2.2V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A22C	-	FS8853A-22CC	LVR-IC	LDO, 2.2V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A23	-	LN2351P3412S	DC-DC-IC	PFM st-up, 3.4V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A23	-	RP110N231B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A23	eb	XC6367A232MR	DC-DC-IC	PWM step-up, 2.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A23	ej	XC6114A334MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A23	ek	XC6365A232MR	DC-DC-IC	PWM st-down, 180kHz, 2.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A23A	-	FS8853A-23CA	LVR-IC	LDO, 2.3V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A23B	-	FS8853A-23CB	LVR-IC	LDO, 2.3V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A23C	-	FS8853A-23CC	LVR-IC	LDO, 2.3V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A24	-	LN2351P3512S	DC-DC-IC	PFM st-up, 3.5V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A24	-	MIC913BM5	Op-IC	Lo-power, ±2.5..±9V, 350MHz	SOT-23-5	28opb	OP1	6g	Mcr
A24	-	RP110N241B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A24	eb	XC6367A242MR	DC-DC-IC	PWM step-up, 2.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A24	ej	XC6114A335MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A24	ek	XC6365A242MR	DC-DC-IC	PWM st-down, 180kHz, 2.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A24	et	XC9301A242MR	DC-DC-IC	PWM step-up/down, 180kHz, 2.4V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A24A	-	FS8853A-24CA	LVR-IC	LDO, 2.4V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A24B	-	FS8853A-24CB	LVR-IC	LDO, 2.4V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A24C	-	FS8853A-24CC	LVR-IC	LDO, 2.4V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A25	-	74AHC1G125GV	CMOS-Log	Bus buffer gate with 3-state output	SOT753	28	Log14	6a	Nxp
A25	-	LN2351P3612S	DC-DC-IC	PFM st-up, 3.6V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A25	-	MIC820BC5	Op-IC	Lo-power, ±4.7V..±5.25V, Icco=22µA, 5V/µs, 4MHz	SC-70-5	28opf	OP1	6g	Mcr
A25	-	RP110N251B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A25	eb	XC6367A252MR	DC-DC-IC	PWM step-up, 2.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A25	ej	XC6114A336MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A25	ek	XC6365A252MR	DC-DC-IC	PWM st-down, 180kHz, 2.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A25	et	XC9301A252MR	DC-DC-IC	PWM step-up/down, 180kHz, 2.5V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A25A	-	FS8853A-25CA	LVR-IC	LDO, 2.5V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A25B	-	FS8853A-25CB	LVR-IC	LDO, 2.5V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A25C	-	FS8853A-25CC	LVR-IC	LDO, 2.5V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A26	-	74AHC1G126GV	CMOS-Log	Bus buffer gate with 3-state output	SOT753	28	Log13	6a	Nxp
A26	-	LN2351P3712S	DC-DC-IC	PFM st-up, 3.7V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A26	-	MIC914BM5	Op-IC	Lo-power, ±2.5..±9V, Icco=1.25mA, 160MHz	SOT-23-5	28opb	OP1	6g	Mcr
A26	-	RP110N261B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A26	eb	XC6367A262MR	DC-DC-IC	PWM step-up, 2.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A26	ej	XC6114A337MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A26	ek	XC6365A262MR	DC-DC-IC	PWM st-down, 180kHz, 2.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A26	et	XC9301A262MR	DC-DC-IC	PWM step-up/down, 180kHz, 2.6V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A26A	-	FS8853A-26CA	LVR-IC	LDO, 2.6V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A26B	-	FS8853A-26CB	LVR-IC	LDO, 2.6V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A26C	-	FS8853A-26CC	LVR-IC	LDO, 2.6V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A27	-	LN2351P3812S	DC-DC-IC	PFM st-up, 3.8V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A27	-	RP110N271B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A27	eb	XC6367A272MR	DC-DC-IC	PWM step-up, 2.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A27	ej	XC6114A338MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A27	ek	XC6365A272MR	DC-DC-IC	PWM st-down, 180kHz, 2.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A27	et	XC9301A272MR	DC-DC-IC	PWM step-up/down, 180kHz, 2.7V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A27A	-	FS8853A-27CA	LVR-IC	LDO, 2.7V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A27B	-	FS8853A-27CB	LVR-IC	LDO, 2.7V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A27C	-	FS8853A-27CC	LVR-IC	LDO, 2.7V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A28	-	LN2351P3912S	DC-DC-IC	PFM st-up, 3.9V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A28	-	RP110N281B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A28	eb	XC6367A282MR	DC-DC-IC	PWM step-up, 2.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A28	ej	XC6114A339MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A28	ek	XC6365A282MR	DC-DC-IC	PWM st-down, 180kHz, 2.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A28	et	XC9301A282MR	DC-DC-IC	PWM step-up/down, 180kHz, 2.8V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A28A	-	FS8853A-28CA	LVR-IC	LDO, 2.8V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A28B	-	FS8853A-28CB	LVR-IC	LDO, 2.8V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A28C	-	FS8853A-28CC	LVR-IC	LDO, 2.8V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A29	-	LN2351P4012S	DC-DC-IC	PFM st-up, 4.0V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A29	-	RP110N291B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A29	eb	XC6367A292MR	DC-DC-IC	PWM step-up, 2.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A29	ej	XC6114A340MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A29	ek	XC6365A292MR	DC-DC-IC	PWM st-down, 180kHz, 2.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A29	et	XC9301A292MR	DC-DC-IC	PWM step-up/down, 180kHz, 2.9V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A29A	-	FS8853A-29CA	LVR-IC	LDO, 2.9V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A29B	-	FS8853A-29CB	LVR-IC	LDO, 2.9V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A29C	-	FS8853A-29CC	LVR-IC	LDO, 2.9V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A2A	-	APR3102-15B	Vdet-IC	1.5V±1.5%, -MR, +Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A2A	-	LN2351P4112S	DC-DC-IC	PFM st-up, 4.1V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2A	eb	XC6367A203MR	DC-DC-IC	PWM step-up, 2.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A2A	ej	XC6114A341MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2B	-	APR3102-17B	Vdet-IC	1.75V±1.5%, -MR, +Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A2B	-	LN2351P4212S	DC-DC-IC	PFM st-up, 4.2V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2B	eb	XC6367A213MR	DC-DC-IC	PWM step-up, 2.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A2B	ej	XC6114A342MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2B	ek	XC6365A213MR	DC-DC-IC	PWM st-down, 300kHz, 2.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A2C	-	APR3102-23B	Vdet-IC	2.32V±1.5%, -MR, +Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A2C	-	LN2351P4312S	DC-DC-IC	PFM st-up, 4.3V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2C	eb	XC6367A223MR	DC-DC-IC	PWM step-up, 2.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A2C	ej	XC6114A343MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2C	ek	XC6365A223MR	DC-DC-IC	PWM st-down, 300kHz, 2.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A2D	-	APR3102-26B	Vdet-IC	2.63V±1.5%, -MR, +Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A2D	-	LN2351P4412S	DC-DC-IC	PFM st-up, 4.4V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2D	eb	XC6367A233MR	DC-DC-IC	PWM step-up, 2.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A2D	ej	XC6114A344MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2D	ek	XC6365A233MR	DC-DC-IC	PWM st-down, 300kHz, 2.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A2E	-	APR3102-29B	Vdet-IC	2.93V±1.5%, -MR, +Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A2E	-	LN2351P4512S	DC-DC-IC	PFM st-up, 4.5V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2E	eb	XC6367A243MR	DC-DC-IC	PWM step-up, 2.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A2E	ej	XC6114A345MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2E	ek	XC6365A243MR	DC-DC-IC	PWM st-down, 300kHz, 2.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A2E	et	XC9301A243MR	DC-DC-IC	PWM step-up/down, 300kHz, 2.4V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A2F	-	APR3102-30B	Vdet-IC	3.08V±1.5%, -MR, +Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A2F	-	LN2351P4612S	DC-DC-IC	PFM st-up, 4.6V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2F	eb	XC6367A253MR	DC-DC-IC	PWM step-up, 2.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A2F	ec	XC6114A316MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2F	ej	XC6114A346MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2F	ek	XC6365A253MR	DC-DC-IC	PWM st-down, 300kHz, 2.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A2F	et	XC9301A253MR	DC-DC-IC	PWM step-up/down, 300kHz, 2.5V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A2G	-	APR3102-39B	Vdet-IC	3.9V±1.5%, -MR, +Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A2H	-	APR3102-43B	Vdet-IC	4.38V±1.5%, -MR, +Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A2H	-	LN2351P4712S	DC-DC-IC	PFM st-up, 4.7V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2H	eb	XC6367A263MR	DC-DC-IC	PWM step-up, 2.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A2H	ec	XC6114A317MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2H	ej	XC6114A347MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2H	ek	XC6365A263MR	DC-DC-IC	PWM st-down, 300kHz, 2.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A2H	et	XC9301A263MR	DC-DC-IC	PWM step-up/down, 300kHz, 2.6V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A2J	-	APR3102-46B	Vdet-IC	4.63V±1.5%, -MR, +Reset PPO	SOT-23-5	28vd2	VD5	6k	Anp
A2K	-	LN2351P4812S	DC-DC-IC	PFM st-up, 4.8V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2K	eb	XC6367A273MR	DC-DC-IC	PWM step-up, 2.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A2K	ec	XC6114A318MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2K	ej	XC6114A348MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2K	ek	XC6365A273MR	DC-DC-IC	PWM st-down, 300kHz, 2.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A2K	et	XC9301A273MR	DC-DC-IC	PWM step-up/down, 300kHz, 2.7V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A2L	-	LN2351P4912S	DC-DC-IC	PFM st-up, 4.9V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2L	eb	XC6367A283MR	DC-DC-IC	PWM step-up, 2.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A2L	ec	XC6114A319MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2L	ej	XC6114A349MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2L	ek	XC6365A283MR	DC-DC-IC	PWM st-down, 300kHz, 2.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A2L	et	XC9301A283MR	DC-DC-IC	PWM step-up/down, 300kHz, 2.8V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A2M	-	LN2351P5012S	DC-DC-IC	PFM st-up, 5.0V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2M	eb	XC6367A293MR	DC-DC-IC	PWM step-up, 2.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A2M	ec	XC6114A320MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2M	ej	XC6114A350MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2M	ek	XC6365A293MR	DC-DC-IC	PWM st-down, 300kHz, 2.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A2M	et	XC9301A293MR	DC-DC-IC	PWM step-up/down, 300kHz, 2.9V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A2N	-	LN2351P5112S	DC-DC-IC	PFM st-up, 5.1V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A2N	ec	XC6114A321MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2P	-	LN2351P5212S	DC-DC-IC	PFM st-up, 5.2V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2P	ec	XC6114A322MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2R	-	LN2351P5312S	DC-DC-IC	PFM st-up, 5.3V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2R	ec	XC6114A323MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2S	-	LN2351P5412S	DC-DC-IC	PFM st-up, 5.4V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2S	ec	XC6114A324MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2T	-	LN2351P5512S	DC-DC-IC	PFM st-up, 5.5V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2T	ec	XC6114A325MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2U	-	LN2351P5612S	DC-DC-IC	PFM st-up, 5.6V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2U	ec	XC6114A326MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2V	-	LN2351P5712S	DC-DC-IC	PFM st-up, 5.7V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2V	ec	XC6114A327MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2X	-	LN2351P5812S	DC-DC-IC	PFM st-up, 5.8V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2X	ec	XC6114A328MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2Y	-	LN2351P5912S	DC-DC-IC	PFM st-up, 5.9V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2Y	ec	XC6114A329MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A2Z	-	LN2351P6012S	DC-DC-IC	PFM st-up, 6.0V±2%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A2Z	ec	XC6114A330MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
a3	-	BD45E231G-M	Vdet-IC	2.3V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
A3	-	AP431AQ	Vref-IC	Adjustable, Precision, Shunt, 2.495V±0.5%	SOT-23-5	28re	RF1	6k	Ana
A3	-	BL8555-13AQ	LVR-IC	LDO, 1.3V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A3	-	BL8555-13ARA	LVR-IC	LDO, 1.3V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A3	-	BL8555-13ARB	LVR-IC	LDO, 1.3V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A3	-	HD74ALVC1G02VS	CMOS-Log	2-input NOR gate	VSON-5	30	Log2	6a	Ren
A3	-	LR8555-13AQ	LVR-IC	LDO, 1.3V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A3	-	LR8555-13ARA	LVR-IC	LDO, 1.3V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A3	-	LR8555-13ARB	LVR-IC	LDO, 1.3V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A3	-	NLAST4501DF	CMOS-Log	Bilateral analogic switch	SC-70-5	28	Log16	6b	Ons
A3	-	NLAST4501DT	CMOS-Log	Bilateral analogic switch	SOT-23-5	28	Log16	6b	Ons
A3	-	R1111N231A	LVR-IC	LDO, Low noise, 2.3V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
A3	-	TC1014-3.0VRX	LVR-IC	LDO, 3.0V±2%, 50mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
A3	ea	BL8555-13KQ	LVR-IC	LDO, 1.3V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A3	ea	BL8555-13KRA	LVR-IC	LDO, 1.3V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A3	ea	BL8555-13KRB	LVR-IC	LDO, 1.3V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A3	ea	LR8555-13KQ	LVR-IC	LDO, 1.3V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A3	ea	LR8555-13KRA	LVR-IC	LDO, 1.3V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A3	ea	LR8555-13KRB	LVR-IC	LDO, 1.3V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A3	eu	BL8555-23KQ	LVR-IC	LDO, 2.3V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A3	eu	BL8555-23KRA	LVR-IC	LDO, 2.3V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A3	eu	BL8555-23KRB	LVR-IC	LDO, 2.3V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A3	eu	LR8555-23KQ	LVR-IC	LDO, 2.3V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A3	eu	LR8555-23KRA	LVR-IC	LDO, 2.3V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A3	eu	LR8555-23KRB	LVR-IC	LDO, 2.3V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A3	fg	BL8555-33KQ	LVR-IC	LDO, 3.3V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A3	fg	BL8555-33KRA	LVR-IC	LDO, 3.3V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A3	fg	BL8555-33KRB	LVR-IC	LDO, 3.3V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A3	fg	LR8555-33KQ	LVR-IC	LDO, 3.3V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A3	fg	LR8555-33KRA	LVR-IC	LDO, 3.3V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A3	fg	LR8555-33KRB	LVR-IC	LDO, 3.3V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A3	fh	BL8555-43KQ	LVR-IC	LDO, 4.3V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A3	fh	BL8555-43KRA	LVR-IC	LDO, 4.3V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A3	fh	BL8555-43KRB	LVR-IC	LDO, 4.3V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A3	fh	LR8555-43KQ	LVR-IC	LDO, 4.3V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A3	fh	LR8555-43KRA	LVR-IC	LDO, 4.3V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A3	fh	LR8555-43KRB	LVR-IC	LDO, 4.3V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A3	fk	BL8555-33AQ	LVR-IC	LDO, 3.3V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A3	fk	BL8555-33ARA	LVR-IC	LDO, 3.3V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A3	fk	BL8555-33ARB	LVR-IC	LDO, 3.3V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A3	fk	LR8555-33AQ	LVR-IC	LDO, 3.3V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A3	fk	LR8555-33ARA	LVR-IC	LDO, 3.3V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A3	fk	LR8555-33ARB	LVR-IC	LDO, 3.3V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A3	fm	BL8555-43AQ	LVR-IC	LDO, 4.3V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A3	fm	BL8555-43ARA	LVR-IC	LDO, 4.3V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A3	fm	BL8555-43ARB	LVR-IC	LDO, 4.3V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A3	fm	LR8555-43AQ	LVR-IC	LDO, 4.3V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A3	fm	LR8555-43ARA	LVR-IC	LDO, 4.3V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A3	fm	LR8555-43ARB	LVR-IC	LDO, 4.3V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A3	fp	BL8555-23AQ	LVR-IC	LDO, 2.3V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A3	fp	BL8555-23ARA	LVR-IC	LDO, 2.3V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A3	fp	BL8555-23ARB	LVR-IC	LDO, 2.3V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A3	fp	LR8555-23AQ	LVR-IC	LDO, 2.3V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A3	fp	LR8555-23ARA	LVR-IC	LDO, 2.3V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A3	fp	LR8555-23ARB	LVR-IC	LDO, 2.3V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A3-	-	RT9193-25PU5	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
A3=	-	RT9193-25GU5	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
A30	-	RP110N301B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A30	eb	XC6367A302MR	DC-DC-IC	PWM step-up, 3.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A30	ej	XC6114A431MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A30	ek	XC6365A302MR	DC-DC-IC	PWM st-down, 180kHz, 3.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A30	et	XC9301A302MR	DC-DC-IC	PWM step-up/down, 180kHz, 3.0V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A30A	-	FS8853A-30CA	LVR-IC	LDO, 3.0V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A30B	-	FS8853A-30CB	LVR-IC	LDO, 3.0V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A30C	-	FS8853A-30CC	LVR-IC	LDO, 3.0V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A31	-	OPA631N	Op-IC	Single-supply, 3.0..10.0V, 100V/µs	SOT-23-5	28opa	OP1	6a	Bb
A31	-	RP110N311B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A31	eb	XC6367A312MR	DC-DC-IC	PWM step-up, 3.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A31	ej	XC6114A432MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A31	ek	XC6365A312MR	DC-DC-IC	PWM st-down, 180kHz, 3.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A31	et	XC9301A312MR	DC-DC-IC	PWM step-up/down, 180kHz, 3.1V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A31A	-	FS8853A-31CA	LVR-IC	LDO, 3.1V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A31B	-	FS8853A-31CB	LVR-IC	LDO, 3.1V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A31C	-	FS8853A-31CC	LVR-IC	LDO, 3.1V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A32	-	74AHC1G32GV	CMOS-Log	2-input OR gate	SOT753	28	Log4	6a	Nxp
A32	-	MIC860BC5	Op-IC	Lo-power, ±2.4V..±5.25V, Icco=30µA, 4MHz	SC-70-5	28opf	OP1	6g	Mcr
A32	-	RP110N321B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A32	-	U74AHC1G32-AL5	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6a	Utc
A32	eb	XC6367A322MR	DC-DC-IC	PWM step-up, 3.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A32	ej	XC6114A433MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A32	ek	XC6365A322MR	DC-DC-IC	PWM st-down, 180kHz, 3.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A32	et	MIC860YC5	Op-IC	Lo-power, ±2.4V..±5.25V, Icco=30µA, 4MHz, Pb-free	SC-70-5	28opf	OP1	6g	Mcr
A32	et	XC9301A322MR	DC-DC-IC	PWM step-up/down, 180kHz, 3.2V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A32A	-	FS8853A-32CA	LVR-IC	LDO, 3.2V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A32A	-	LMV751M5	Op-IC	Low noise, Vcc=2.7..5V, 4.5MHz, 2V/µs	SOT-23-5	28opa	OP1	6g	Nsc
A32A	-	LMV751M5X	Op-IC	Low noise, Vcc=2.7..5V, 4.5MHz, 2V/µs	SOT-23-5	28opa	OP1	6g	Nsc
A32B	-	FS8853A-32CB	LVR-IC	LDO, 3.2V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A32C	-	FS8853A-32CC	LVR-IC	LDO, 3.2V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A33	-	MIC861BC5	Op-IC	Lo-power, ±2.4V..±5.25V, Icco=4.6µA, 400kHz	SC-70-5	28opf	OP1	6g	Mcr
A33	-	RP110N331B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A33	eb	XC6367A332MR	DC-DC-IC	PWM step-up, 3.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A33	ej	XC6114A434MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A33	ek	XC6365A332MR	DC-DC-IC	PWM st-down, 180kHz, 3.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A33	et	MIC861YC5	Op-IC	Lo-power, ±2.4V..±5.25V, Icco=4.6µA, 400kHz, Pb-free	SC-70-5	28opf	OP1	6g	Mcr
A33	et	XC9301A332MR	DC-DC-IC	PWM step-up/down, 180kHz, 3.3V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A33A	-	FS8853A-33CA	LVR-IC	LDO, 3.3V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A33B	-	FS8853A-33CB	LVR-IC	LDO, 3.3V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A33C	-	FS8853A-33CC	LVR-IC	LDO, 3.3V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A34	-	RP110N341B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A34	eb	XC6367A342MR	DC-DC-IC	PWM step-up, 3.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A34	ej	XC6114A435MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A34	ek	XC6365A342MR	DC-DC-IC	PWM st-down, 180kHz, 3.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A34	et	XC9301A342MR	DC-DC-IC	PWM step-up/down, 180kHz, 3.4V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A34A	-	FS8853A-34CA	LVR-IC	LDO, 3.4V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A34B	-	FS8853A-34CB	LVR-IC	LDO, 3.4V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A34C	-	FS8853A-34CC	LVR-IC	LDO, 3.4V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A35	-	RP110N351B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A35	eb	XC6367A352MR	DC-DC-IC	PWM step-up, 3.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A35	ej	XC6114A436MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A35	ek	XC6365A352MR	DC-DC-IC	PWM st-down, 180kHz, 3.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A35	et	XC9301A352MR	DC-DC-IC	PWM step-up/down, 180kHz, 3.5V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A35A	-	FS8853A-35CA	LVR-IC	LDO, 3.5V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A35B	-	FS8853A-35CB	LVR-IC	LDO, 3.5V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A35C	-	FS8853A-35CC	LVR-IC	LDO, 3.5V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A36	-	OPA336NA	Op-IC	Single-supply, CMOS, 2.3..5.5V, 115dB	SOT-23-5	28opa	OP1	6a	Bb
A36	-	RP110N361B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A36	eb	XC6367A362MR	DC-DC-IC	PWM step-up, 3.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A36	ej	XC6114A437MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A36	ek	XC6365A362MR	DC-DC-IC	PWM st-down, 180kHz, 3.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A36	et	XC9301A362MR	DC-DC-IC	PWM step-up/down, 180kHz, 3.6V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A36A	-	FS8853A-36CA	LVR-IC	LDO, 3.6V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A36B	-	FS8853A-36CB	LVR-IC	LDO, 3.6V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A36C	-	FS8853A-36CC	LVR-IC	LDO, 3.6V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A37	-	RP110N121B5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A37	eb	XC6367A372MR	DC-DC-IC	PWM step-up, 3.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A37	ej	XC6114A438MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A37	ek	XC6365A372MR	DC-DC-IC	PWM st-down, 180kHz, 3.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A37	et	XC9301A372MR	DC-DC-IC	PWM step-up/down, 180kHz, 3.7V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A37A	-	FS8853A-37CA	LVR-IC	LDO, 3.7V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A37A	-	OPA237NA	Op-IC	GP, Lo-Power, ±1.35..±18V, Icc0=350µA, 1.5MHz	SOT-23-5	28opa	OP1	6a	Bb
A37B	-	FS8853A-37CB	LVR-IC	LDO, 3.7V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A37C	-	FS8853A-37CC	LVR-IC	LDO, 3.7V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A38	-	OPA338NA	Op-IC	Single-supply, CMOS, 2.5..5.5V, 120dB, 12.5MHz	SOT-23-5	28opa	OP1	6a	Bb
A38	-	RP110N181B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A38	eb	XC6367A382MR	DC-DC-IC	PWM step-up, 3.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A38	ej	XC6114A439MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A38	ek	XC6365A382MR	DC-DC-IC	PWM st-down, 180kHz, 3.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A38	et	XC9301A382MR	DC-DC-IC	PWM step-up/down, 180kHz, 3.8V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A38A	-	FS8853A-38CA	LVR-IC	LDO, 3.8V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A38B	-	FS8853A-38CB	LVR-IC	LDO, 3.8V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A38C	-	FS8853A-38CC	LVR-IC	LDO, 3.8V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A39	-	RP110N281B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
A39	eb	XC6367A392MR	DC-DC-IC	PWM step-up, 3.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A39	ej	XC6114A440MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A39	ek	XC6365A392MR	DC-DC-IC	PWM st-down, 180kHz, 3.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A39	et	XC9301A392MR	DC-DC-IC	PWM step-up/down, 180kHz, 3.9V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A39A	-	FS8853A-39CA	LVR-IC	LDO, 3.9V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A39B	-	FS8853A-39CB	LVR-IC	LDO, 3.9V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A39C	-	FS8853A-39CC	LVR-IC	LDO, 3.9V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A3A	-	APR3103-15B	Vdet-IC	1.5V±1.5%, -MR, -Reset ODO	SOT-23-5	28vd2	VD4	6k	Anp
A3A	eb	XC6367A303MR	DC-DC-IC	PWM step-up, 3.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A3A	ej	XC6114A441MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3A	ek	XC6365A303MR	DC-DC-IC	PWM st-down, 300kHz, 3.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A3A	et	XC9301A303MR	DC-DC-IC	PWM step-up/down, 300kHz, 3.0V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A3B	-	APR3103-17B	Vdet-IC	1.75V±1.5%, -MR, -Reset ODO	SOT-23-5	28vd2	VD4	6k	Anp
A3B	eb	XC6367A313MR	DC-DC-IC	PWM step-up, 3.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A3B	ej	XC6114A442MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3B	ek	XC6365A313MR	DC-DC-IC	PWM st-down, 300kHz, 3.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A3B	et	XC9301A313MR	DC-DC-IC	PWM step-up/down, 300kHz, 3.1V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A3C	-	APR3103-23B	Vdet-IC	2.32V±1.5%, -MR, -Reset ODO	SOT-23-5	28vd2	VD4	6k	Anp
A3C	eb	XC6367A323MR	DC-DC-IC	PWM step-up, 3.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A3C	ej	XC6114A443MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3C	ek	XC6365A323MR	DC-DC-IC	PWM st-down, 300kHz, 3.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A3C	et	XC9301A323MR	DC-DC-IC	PWM step-up/down, 300kHz, 3.2V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A3D	-	APR3103-26B	Vdet-IC	2.63V±1.5%, -MR, -Reset ODO	SOT-23-5	28vd2	VD4	6k	Anp
A3D	eb	XC6367A333MR	DC-DC-IC	PWM step-up, 3.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A3D	ej	XC6114A444MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3D	ek	XC6365A333MR	DC-DC-IC	PWM st-down, 300kHz, 3.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A3D	et	XC9301A333MR	DC-DC-IC	PWM step-up/down, 300kHz, 3.3V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A3E	-	APR3103-29B	Vdet-IC	2.93V±1.5%, -MR, -Reset ODO	SOT-23-5	28vd2	VD4	6k	Anp
A3E	-	LN2351P1532S	DC-DC-IC	PFM step-up, 1.5V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A3E	eb	XC6367A343MR	DC-DC-IC	PWM step-up, 3.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A3E	ej	XC6114A445MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3E	ek	XC6365A343MR	DC-DC-IC	PWM st-down, 300kHz, 3.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A3E	et	XC9301A343MR	DC-DC-IC	PWM step-up/down, 300kHz, 3.4V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A3F	-	APR3103-30B	Vdet-IC	3.08V±1.5%, -MR, -Reset ODO	SOT-23-5	28vd2	VD4	6k	Anp
A3F	-	LN2351P1632S	DC-DC-IC	PFM step-up, 1.6V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A3F	eb	XC6367A353MR	DC-DC-IC	PWM step-up, 3.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A3F	ec	XC6114A416MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3F	ej	XC6114A446MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3F	ek	XC6365A353MR	DC-DC-IC	PWM st-down, 300kHz, 3.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A3F	et	XC9301A353MR	DC-DC-IC	PWM step-up/down, 300kHz, 3.5V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A3G	-	APR3103-39B	Vdet-IC	3.9V±1.5%, -MR, -Reset ODO	SOT-23-5	28vd2	VD4	6k	Anp
A3H	-	APR3103-43B	Vdet-IC	4.38V±1.5%, -MR, -Reset ODO	SOT-23-5	28vd2	VD4	6k	Anp
A3H	-	LN2351P1732S	DC-DC-IC	PFM step-up, 1.7V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A3H	eb	XC6367A363MR	DC-DC-IC	PWM step-up, 3.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A3H	ec	XC6114A417MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3H	ej	XC6114A447MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3H	ek	XC6365A363MR	DC-DC-IC	PWM st-down, 300kHz, 3.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A3H	et	XC9301A363MR	DC-DC-IC	PWM step-up/down, 300kHz, 3.6V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A3J	-	APR3103-46B	Vdet-IC	4.63V±1.5%, -MR, -Reset ODO	SOT-23-5	28vd2	VD4	6k	Anp



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A3K	-	LN2351P1832S	DC-DC-IC	PFM step-up, 1.8V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A3K	eb	XC6367A373MR	DC-DC-IC	PWM step-up, 3.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A3K	ec	XC6114A418MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3K	ej	XC6114A448MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3K	ek	XC6365A373MR	DC-DC-IC	PWM st-down, 300kHz, 3.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A3K	et	XC9301A373MR	DC-DC-IC	PWM step-up/down, 300kHz, 3.7V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A3L	-	LN2351P1932S	DC-DC-IC	PFM step-up, 1.9V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A3L	eb	XC6367A383MR	DC-DC-IC	PWM step-up, 3.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A3L	ec	XC6114A419MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3L	ej	XC6114A449MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3L	ek	XC6365A383MR	DC-DC-IC	PWM st-down, 300kHz, 3.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A3L	et	XC9301A383MR	DC-DC-IC	PWM step-up/down, 300kHz, 3.8V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A3M	-	LN2351P2032S	DC-DC-IC	PFM st-up, 2.0V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A3M	eb	XC6367A393MR	DC-DC-IC	PWM step-up, 3.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A3M	ec	XC6114A420MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3M	ej	XC6114A450MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3M	ek	XC6365A393MR	DC-DC-IC	PWM st-down, 300kHz, 3.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A3M	et	XC9301A393MR	DC-DC-IC	PWM step-up/down, 300kHz, 3.9V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A3N	-	LN2351P2132S	DC-DC-IC	PFM st-up, 2.1V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A3N	ec	XC6114A421MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3P	-	LN2351P2232S	DC-DC-IC	PFM st-up, 2.2V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A3P	ec	XC6114A422MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3R	-	LN2351P2332S	DC-DC-IC	PFM st-up, 2.3V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A3R	ec	XC6114A423MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3S	-	LN2351P2432S	DC-DC-IC	PFM st-up, 2.4V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A3S	ec	XC6114A424MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3T	-	LN2351P2532S	DC-DC-IC	PFM st-up, 2.5V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A3T	ec	XC6114A425MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3U	-	LN2351P2632S	DC-DC-IC	PFM st-up, 2.6V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A3U	ec	XC6114A426MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3V	-	LN2351P2732S	DC-DC-IC	PFM st-up, 2.7V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A3V	ec	XC6114A427MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3X	-	LN2351P2832S	DC-DC-IC	PFM st-up, 2.8V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A3X	ec	XC6114A428MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3Y	-	LN2351P2932S	DC-DC-IC	PFM st-up, 2.9V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A3Y	ec	XC6114A429MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A3Z	-	LN2351P3032S	DC-DC-IC	PFM st-up, 3.0V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A3Z	ec	XC6114A430MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
a4	-	BD45E241G-M	Vdet-IC	2.4V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
A4	-	BL8555-14AQ	LVR-IC	LDO, 1.4V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A4	-	BL8555-14ARA	LVR-IC	LDO, 1.4V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A4	-	BL8555-14ARB	LVR-IC	LDO, 1.4V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A4	-	HD74ALVC1G32VS	CMOS-Log	2-input OR gate	VSON-5	30	Log4	6a	Ren
A4	-	LR8555-14AQ	LVR-IC	LDO, 1.4V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A4	-	LR8555-14ARA	LVR-IC	LDO, 1.4V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A4	-	LR8555-14ARB	LVR-IC	LDO, 1.4V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A4	-	PI74ST1G04CX	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	Per
A4	-	PI74ST1G04TX	CMOS-Log	Inverter	SOT-23-5	28	Log6	6a	Per
A4	-	R1111N241A	LVR-IC	LDO, Low noise, 2.4V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
A4	ea	BL8555-14KQ	LVR-IC	LDO, 1.4V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A4	ea	BL8555-14KRA	LVR-IC	LDO, 1.4V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A4	ea	BL8555-14KRB	LVR-IC	LDO, 1.4V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A4	ea	LR8555-14KQ	LVR-IC	LDO, 1.4V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A4	ea	LR8555-14KRA	LVR-IC	LDO, 1.4V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A4	ea	LR8555-14KRB	LVR-IC	LDO, 1.4V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A4	eu	BL8555-24KQ	LVR-IC	LDO, 2.4V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A4	eu	BL8555-24KRA	LVR-IC	LDO, 2.4V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A4	eu	BL8555-24KRB	LVR-IC	LDO, 2.4V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A4	eu	LR8555-24KQ	LVR-IC	LDO, 2.4V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A4	eu	LR8555-24KRA	LVR-IC	LDO, 2.4V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A4	eu	LR8555-24KRB	LVR-IC	LDO, 2.4V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A4	fg	BL8555-34KQ	LVR-IC	LDO, 3.4V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A4	fg	BL8555-34KRA	LVR-IC	LDO, 3.4V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A4	fg	BL8555-34KRB	LVR-IC	LDO, 3.4V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A4	fg	LR8555-34KQ	LVR-IC	LDO, 3.4V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A4	fg	LR8555-34KRA	LVR-IC	LDO, 3.4V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A4	fg	LR8555-34KRB	LVR-IC	LDO, 3.4V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A4	fh	BL8555-44KQ	LVR-IC	LDO, 4.4V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A4	fh	BL8555-44KRA	LVR-IC	LDO, 4.4V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A4	fh	BL8555-44KRB	LVR-IC	LDO, 4.4V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A4	fh	LR8555-44KQ	LVR-IC	LDO, 4.4V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A4	fh	LR8555-44KRA	LVR-IC	LDO, 4.4V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A4	fh	LR8555-44KRB	LVR-IC	LDO, 4.4V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A4	fk	BL8555-34AQ	LVR-IC	LDO, 3.4V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A4	fk	BL8555-34ARB	LVR-IC	LDO, 3.4V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A4	fk	BL8555-34PAA	LVR-IC	LDO, 3.4V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A4	fk	LR8555-34AQ	LVR-IC	LDO, 3.4V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A4	fk	LR8555-34ARB	LVR-IC	LDO, 3.4V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A4	fk	LR8555-34PAA	LVR-IC	LDO, 3.4V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A4	fm	BL8555-44AQ	LVR-IC	LDO, 4.4V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A4	fm	BL8555-44ARA	LVR-IC	LDO, 4.4V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A4	fm	BL8555-44ARB	LVR-IC	LDO, 4.4V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A4	fm	LR8555-44AQ	LVR-IC	LDO, 4.4V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A4	fm	LR8555-44ARA	LVR-IC	LDO, 4.4V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A4	fm	LR8555-44ARB	LVR-IC	LDO, 4.4V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A4	fp	BL8555-24AQ	LVR-IC	LDO, 2.4V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A4	fp	BL8555-24ARA	LVR-IC	LDO, 2.4V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A4	fp	BL8555-24ARB	LVR-IC	LDO, 2.4V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A4	fp	LR8555-24AQ	LVR-IC	LDO, 2.4V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A4	fp	LR8555-24ARA	LVR-IC	LDO, 2.4V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A4	fp	LR8555-24ARB	LVR-IC	LDO, 2.4V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A40	-	LN2351P3132S	DC-DC-IC	PFM st-up, 3.1V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A40	-	OPA340NA	Op-IC	Single-supply, Rail-to-Rail, 2.5..5.5V, 5.5MHz, 6V/µs	SOT-23-5	28opa	OP1	6a	Bb
A40	eb	XC6367A402MR	DC-DC-IC	PWM step-up, 4.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A40	ej	XC6114A531MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A40	ek	XC6365A402MR	DC-DC-IC	PWM st-down, 180kHz, 4.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A40	et	XC9301A402MR	DC-DC-IC	PWM step-up/down, 180kHz, 4.0V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A40A	-	FS8853A-40CA	LVR-IC	LDO, 4.0V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A40B	-	FS8853A-40CB	LVR-IC	LDO, 4.0V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A40C	-	FS8853A-40CC	LVR-IC	LDO, 4.0V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A41	-	LN2351P3232S	DC-DC-IC	PFM st-up, 3.2V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A41	eb	XC6367A412MR	DC-DC-IC	PWM step-up, 4.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A41	ej	XC6114A532MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A41	ek	XC6365A412MR	DC-DC-IC	PWM st-down, 180kHz, 4.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A41	et	XC9301A412MR	DC-DC-IC	PWM step-up/down, 180kHz, 4.1V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A41A	-	FS8853A-41CA	LVR-IC	LDO, 4.1V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A41B	-	FS8853A-41CB	LVR-IC	LDO, 4.1V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A41C	-	FS8853A-41CC	LVR-IC	LDO, 4.1V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A42	-	LN2351P3332S	DC-DC-IC	PFM st-up, 3.3V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A42	-	OPA642N	Op-IC	Low Distortion, Low Gain, ±2.5..±5.5V, 400MHz, 95dB	SOT-23-5	28opa	OP1	6a	Bb
A42	eb	XC6367A422MR	DC-DC-IC	PWM step-up, 4.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A42	ej	XC6114A533MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A42	ek	XC6365A422MR	DC-DC-IC	PWM st-down, 180kHz, 4.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A42	et	XC9301A422MR	DC-DC-IC	PWM step-up/down, 180kHz, 4.2V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A42A	-	FS8853A-42CA	LVR-IC	LDO, 4.2V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A42B	-	FS8853A-42CB	LVR-IC	LDO, 4.2V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A42B	-	OPA642NB	Op-IC	Low Distortion, Low Gain, ±2.5..±5.5V, 400MHz, 95dB	SOT-23-5	28opa	OP1	6a	Bb
A42C	-	FS8853A-42CC	LVR-IC	LDO, 4.2V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A43	-	LN2351P3432S	DC-DC-IC	PFM st-up, 3.4V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A43	-	OPA643N	Op-IC	Wide-band, High Gain, ±4.5V..±5.5V, 1000V/µs, Vg=95dB	SOT-23-5	28opa	OP1	6a	Bb
A43	eb	XC6367A432MR	DC-DC-IC	PWM step-up, 4.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A43	ej	XC6114A534MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A43	ek	XC6365A432MR	DC-DC-IC	PWM st-down, 180kHz, 4.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A43	et	XC9301A432MR	DC-DC-IC	PWM step-up/down, 180kHz, 4.3V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A43A	-	FS8853A-43CA	LVR-IC	LDO, 4.3V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A43B	-	FS8853A-43CB	LVR-IC	LDO, 4.3V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A43B	-	OPA643NB	Op-IC	Wide-band, High Gain, ±4.5V..±5.5V, 1000V/µs, Vg=95dB	SOT-23-5	28opa	OP1	6a	Bb
A43C	-	FS8853A-43CC	LVR-IC	LDO, 4.3V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A44	-	LN2351P3532S	DC-DC-IC	PFM st-up, 3.5V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A44	-	OPA244NA	Op-IC	Single-supply, 2.2..36V, 430kHz	SOT-23-5	28opa	OP1	6a	Bb
A44	eb	XC6367A442MR	DC-DC-IC	PWM step-up, 4.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A44	ej	XC6114A535MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A44	ek	XC6365A442MR	DC-DC-IC	PWM st-down, 180kHz, 4.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A44	et	XC9301A442MR	DC-DC-IC	PWM step-up/down, 180kHz, 4.4V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A44A	-	FS8853A-44CA	LVR-IC	LDO, 4.4V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A44B	-	FS8853A-44CB	LVR-IC	LDO, 4.4V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A44C	-	FS8853A-44CC	LVR-IC	LDO, 4.4V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A45	-	LN2351P3632S	DC-DC-IC	PFM st-up, 3.6V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A45	eb	XC6367A452MR	DC-DC-IC	PWM step-up, 4.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A45	ej	XC6114A536MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A45	ek	XC6365A452MR	DC-DC-IC	PWM st-down, 180kHz, 4.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A45	et	XC9301A452MR	DC-DC-IC	PWM step-up/down, 180kHz, 4.5V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A45A	-	FS8853A-45CA	LVR-IC	LDO, 4.5V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A45B	-	FS8853A-45CB	LVR-IC	LDO, 4.5V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A45C	-	FS8853A-45CC	LVR-IC	LDO, 4.5V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A46	-	LN2351P3732S	DC-DC-IC	PFM st-up, 3.7V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A46	eb	XC6367A462MR	DC-DC-IC	PWM step-up, 4.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A46	ej	XC6114A537MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A46	ek	XC6365A462MR	DC-DC-IC	PWM st-down, 180kHz, 4.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A46	et	XC9301A462MR	DC-DC-IC	PWM step-up/down, 180kHz, 4.6V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A46A	-	FS8853A-46CA	LVR-IC	LDO, 4.6V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A46B	-	FS8853A-46CB	LVR-IC	LDO, 4.6V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A46C	-	FS8853A-46CC	LVR-IC	LDO, 4.6V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A47	-	LN2351P3832S	DC-DC-IC	PFM st-up, 3.8V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A47	eb	XC6367A472MR	DC-DC-IC	PWM step-up, 4.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A47	ej	XC6114A538MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A47	ek	XC6365A472MR	DC-DC-IC	PWM st-down, 180kHz, 4.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A47	et	XC9301A472MR	DC-DC-IC	PWM step-up/down, 180kHz, 4.7V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A47A	-	FS8853A-47CA	LVR-IC	LDO, 4.7V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A47B	-	FS8853A-47CB	LVR-IC	LDO, 4.7V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A47C	-	FS8853A-47CC	LVR-IC	LDO, 4.7V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A48	-	LN2351P3932S	DC-DC-IC	PFM st-up, 3.9V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A48	eb	XC6367A482MR	DC-DC-IC	PWM step-up, 4.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A48	ej	XC6114A539MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A48	ek	XC6365A482MR	DC-DC-IC	PWM st-down, 180kHz, 4.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A48	et	XC9301A482MR	DC-DC-IC	PWM step-up/down, 180kHz, 4.8V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A48A	-	FS8853A-48CA	LVR-IC	LDO, 4.8V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A48B	-	FS8853A-48CB	LVR-IC	LDO, 4.8V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A48C	-	FS8853A-48CC	LVR-IC	LDO, 4.8V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A49	-	LN2351P4032S	DC-DC-IC	PFM st-up, 4.0V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A49	eb	XC6367A492MR	DC-DC-IC	PWM step-up, 4.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A49	ej	XC6114A540MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A49	ek	XC6365A492MR	DC-DC-IC	PWM st-down, 180kHz, 4.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A49	et	XC9301A492MR	DC-DC-IC	PWM step-up/down, 180kHz, 4.9V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A49A	-	FS8853A-49CA	LVR-IC	LDO, 4.9V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A49B	-	FS8853A-49CB	LVR-IC	LDO, 4.9V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A49C	-	FS8853A-49CC	LVR-IC	LDO, 4.9V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A4A	-	LN2351P4132S	DC-DC-IC	PFM st-up, 4.1V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4A	eb	XC6367A403MR	DC-DC-IC	PWM step-up, 4.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A4A	ej	XC6114A541MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4A	ek	XC6365A403MR	DC-DC-IC	PWM st-down, 300kHz, 4.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A4A	et	XC9301A403MR	DC-DC-IC	PWM step-up/down, 300kHz, 4.0V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A4B	-	LN2351P4232S	DC-DC-IC	PFM st-up, 4.2V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4B	eb	XC6367A413MR	DC-DC-IC	PWM step-up, 4.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A4B	ej	XC6114A542MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4B	ek	XC6365A413MR	DC-DC-IC	PWM st-down, 300kHz, 4.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A4B	et	XC9301A413MR	DC-DC-IC	PWM step-up/down, 300kHz, 4.1V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A4C	-	LN2351P4332S	DC-DC-IC	PFM st-up, 4.3V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4C	eb	XC6367A423MR	DC-DC-IC	PWM step-up, 4.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A4C	ej	XC6114A543MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4C	ek	XC6365A423MR	DC-DC-IC	PWM st-down, 300kHz, 4.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A4C	et	XC9301A423MR	DC-DC-IC	PWM step-up/down, 300kHz, 4.2V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A4D	-	LN2351P4432S	DC-DC-IC	PFM st-up, 4.4V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4D	eb	XC6367A433MR	DC-DC-IC	PWM step-up, 4.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A4D	ej	XC6114A544MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4D	ek	XC6365A433MR	DC-DC-IC	PWM st-down, 300kHz, 4.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A4D	et	XC9301A433MR	DC-DC-IC	PWM step-up/down, 300kHz, 4.3V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A4E	-	LN2351P4532S	DC-DC-IC	PFM st-up, 4.5V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4E	eb	XC6367A443MR	DC-DC-IC	PWM step-up, 4.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A4E	ej	XC6114A545MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4E	ek	XC6365A443MR	DC-DC-IC	PWM st-down, 300kHz, 4.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A4E	et	XC9301A443MR	DC-DC-IC	PWM step-up/down, 300kHz, 4.4V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A4F	-	LN2351P4632S	DC-DC-IC	PFM st-up, 4.6V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4F	eb	XC6367A453MR	DC-DC-IC	PWM step-up, 4.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A4F	ec	XC6114A516MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4F	ej	XC6114A546MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4F	ek	XC6365A453MR	DC-DC-IC	PWM st-down, 300kHz, 4.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A4F	et	XC9301A453MR	DC-DC-IC	PWM step-up/down, 300kHz, 4.5V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A4H	-	LN2351P4732S	DC-DC-IC	PFM st-up, 4.7V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4H	eb	XC6367A463MR	DC-DC-IC	PWM step-up, 4.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A4H	ec	XC6114A517MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4H	ej	XC6114A547MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4H	ek	XC6365A463MR	DC-DC-IC	PWM st-down, 300kHz, 4.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A4H	et	XC9301A463MR	DC-DC-IC	PWM step-up/down, 300kHz, 4.6V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A4K	-	LN2351P4832S	DC-DC-IC	PFM st-up, 4.8V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4K	eb	XC6367A473MR	DC-DC-IC	PWM step-up, 4.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A4K	ec	XC6114A518MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4K	ej	XC6114A548MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4K	ek	XC6365A473MR	DC-DC-IC	PWM st-down, 300kHz, 4.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A4K	et	XC9301A473MR	DC-DC-IC	PWM step-up/down, 300kHz, 4.7V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A4L	-	LN2351P4932S	DC-DC-IC	PFM st-up, 4.9V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4L	eb	XC6367A483MR	DC-DC-IC	PWM step-up, 4.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A4L	ec	XC6114A519MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4L	ej	XC6114A549MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4L	ek	XC6365A483MR	DC-DC-IC	PWM st-down, 300kHz, 4.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A4L	et	XC9301A483MR	DC-DC-IC	PWM step-up/down, 300kHz, 4.8V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A4M	-	LN2351P5032S	DC-DC-IC	PFM st-up, 5.0V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4M	eb	XC6367A493MR	DC-DC-IC	PWM step-up, 4.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A4M	ec	XC6114A520MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4M	ej	XC6114A550MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4M	ek	XC6365A493MR	DC-DC-IC	PWM st-down, 300kHz, 4.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A4M	et	XC9301A493MR	DC-DC-IC	PWM step-up/down, 300kHz, 4.9V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A4N	-	LN2351P5132S	DC-DC-IC	PFM st-up, 5.1V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4N	ec	XC6114A521MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4P	-	LN2351P5232S	DC-DC-IC	PFM st-up, 5.2V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4P	ec	XC6114A522MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4R	-	LN2351P5332S	DC-DC-IC	PFM st-up, 5.3V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4R	ec	XC6114A523MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4S	-	LN2351P5432S	DC-DC-IC	PFM st-up, 5.4V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4S	ec	XC6114A524MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4T	-	LN2351P5532S	DC-DC-IC	PFM st-up, 5.5V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4T	ec	XC6114A525MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4U	-	LN2351P5632S	DC-DC-IC	PFM st-up, 5.6V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4U	ec	XC6114A526MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4V	-	LN2351P5732S	DC-DC-IC	PFM st-up, 5.7V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4V	ec	XC6114A527MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4X	-	LN2351P5832S	DC-DC-IC	PFM st-up, 5.8V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4X	ec	XC6114A528MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4Y	-	LN2351P5932S	DC-DC-IC	PFM st-up, 5.9V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4Y	ec	XC6114A529MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A4Z	-	LN2351P6032S	DC-DC-IC	PFM st-up, 6.0V±2%, 400mA, 180kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A4Z	ec	XC6114A530MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
a5	-	BD45E251G-M	Vdet-IC	2.5V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
A5	-	BL8555-15AQ	LVR-IC	LDO, 1.5V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A5	-	BL8555-15ARA	LVR-IC	LDO, 1.5V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A5	-	BL8555-15ARB	LVR-IC	LDO, 1.5V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A5	-	HD74ALVC1G04VS	CMOS-Log	Inverter	VSON-5	30	Log6	6a	Ren
A5	-	LR8555-15AQ	LVR-IC	LDO, 1.5V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A5	-	LR8555-15ARA	LVR-IC	LDO, 1.5V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A5	-	LR8555-15ARB	LVR-IC	LDO, 1.5V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A5	-	R1111N251A	LVR-IC	LDO, Low noise, 2.5V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
A5	-	TC1014-3.3VRX	LVR-IC	LDO, 3.3V±2%, 50mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
A5	ea	BL8555-15KQ	LVR-IC	LDO, 1.5V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A5	ea	BL8555-15KRA	LVR-IC	LDO, 1.5V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A5	ea	BL8555-15KRB	LVR-IC	LDO, 1.5V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A5	ea	LR8555-15KQ	LVR-IC	LDO, 1.5V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A5	ea	LR8555-15KRA	LVR-IC	LDO, 1.5V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A5	ea	LR8555-15KRB	LVR-IC	LDO, 1.5V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A5	eu	BL8555-25KQ	LVR-IC	LDO, 2.5V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A5	eu	BL8555-25KRA	LVR-IC	LDO, 2.5V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A5	eu	BL8555-25KRB	LVR-IC	LDO, 2.5V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A5	eu	LR8555-25KQ	LVR-IC	LDO, 2.5V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A5	eu	LR8555-25KRA	LVR-IC	LDO, 2.5V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A5	eu	LR8555-25KRB	LVR-IC	LDO, 2.5V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A5	fg	BL8555-35KQ	LVR-IC	LDO, 3.5V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A5	fg	BL8555-35KRA	LVR-IC	LDO, 3.5V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A5	fg	BL8555-35KRB	LVR-IC	LDO, 3.5V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A5	fg	LR8555-35KQ	LVR-IC	LDO, 3.5V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A5	fg	LR8555-35KRA	LVR-IC	LDO, 3.5V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A5	fg	LR8555-35KRB	LVR-IC	LDO, 3.5V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A5	fh	BL8555-45KQ	LVR-IC	LDO, 4.5V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A5	fh	BL8555-45KRA	LVR-IC	LDO, 4.5V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A5	fh	BL8555-45KRB	LVR-IC	LDO, 4.5V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A5	fh	LR8555-45KQ	LVR-IC	LDO, 4.5V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A5	fh	LR8555-45KRA	LVR-IC	LDO, 4.5V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A5	fh	LR8555-45KRB	LVR-IC	LDO, 4.5V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A5	fk	BL8555-35AQ	LVR-IC	LDO, 3.5V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A5	fk	BL8555-35ARA	LVR-IC	LDO, 3.5V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A5	fk	BL8555-35ARB	LVR-IC	LDO, 3.5V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A5	fk	LR8555-35AQ	LVR-IC	LDO, 3.5V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A5	fk	LR8555-35ARA	LVR-IC	LDO, 3.5V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A5	fk	LR8555-35ARB	LVR-IC	LDO, 3.5V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A5	fm	BL8555-45AQ	LVR-IC	LDO, 4.5V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A5	fm	BL8555-45ARA	LVR-IC	LDO, 4.5V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A5	fm	BL8555-45ARB	LVR-IC	LDO, 4.5V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A5	fm	LR8555-45AQ	LVR-IC	LDO, 4.5V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A5	fm	LR8555-45ARA	LVR-IC	LDO, 4.5V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A5	fm	LR8555-45ARB	LVR-IC	LDO, 4.5V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A5	fp	BL8555-25AQ	LVR-IC	LDO, 2.5V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A5	fp	BL8555-25ARA	LVR-IC	LDO, 2.5V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A5	fp	BL8555-25ARB	LVR-IC	LDO, 2.5V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A5	fp	LR8555-25AQ	LVR-IC	LDO, 2.5V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A5	fp	LR8555-25ARA	LVR-IC	LDO, 2.5V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A5	fp	LR8555-25ARB	LVR-IC	LDO, 2.5V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A5-	-	RT9198-18PU5	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SC-70-5	28xm	VR4	6a	Rct
A50	-	OPA650N	Op-IC	Lo-power, WB, Voltage Feedback, ±5V, 560MHz	SOT-23-5	28opa	OP1	6a	Bb
A50	eb	XC6367A502MR	DC-DC-IC	PWM step-up, 5.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A50	ej	XC6114A631MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A50	ek	XC6365A502MR	DC-DC-IC	PWM st-down, 180kHz, 5.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A50	et	XC9301A502MR	DC-DC-IC	PWM step-up/down, 180kHz, 5.0V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A50A	-	FS8853A-50CA	LVR-IC	LDO, 5.0V±35mV, 300mA, +CE	SOT-23-5	28cx	VR4	6aa	Frt
A50B	-	FS8853A-50CB	LVR-IC	LDO, 5.0V±35mV, 300mA, +CE	SOT-23-5	28vc	VR4	6aa	Frt
A50B	-	OPA650NB	Op-IC	Lo-power, WB, Voltage Feedback, ±5V, 560MHz	SOT-23-5	28opa	OP1	6a	Bb
A50C	-	FS8853A-50CC	LVR-IC	LDO, 5.0V±35mV, 300mA, +CE	SOT-23-5	28vrt	VR4	6aa	Frt
A51	-	OPA651N	Op-IC	Lo-power, WB, Voltage Feedback, ±5V, 470MHz	SOT-23-5	28opa	OP1	6a	Bb
A51	eb	XC6367A512MR	DC-DC-IC	PWM step-up, 5.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A51	ej	XC6114A632MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A51	ek	XC6365A512MR	DC-DC-IC	PWM st-down, 180kHz, 5.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A51	et	XC9301A512MR	DC-DC-IC	PWM step-up/down, 180kHz, 5.1V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A51B	-	OPA651NB	Op-IC	Lo-power, WB, Voltage Feedback, ±5V, 470MHz	SOT-23-5	28opa	OP1	6a	Bb
A52	eb	XC6367A522MR	DC-DC-IC	PWM step-up, 5.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A52	ej	XC6114A633MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A52	ek	XC6365A522MR	DC-DC-IC	PWM st-down, 180kHz, 5.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A52	et	XC9301A522MR	DC-DC-IC	PWM step-up/down, 180kHz, 5.2V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A53	eb	XC6367A532MR	DC-DC-IC	PWM step-up, 5.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A53	ej	XC6114A634MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A53	ek	XC6365A532MR	DC-DC-IC	PWM st-down, 180kHz, 5.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A53	et	XC9301A532MR	DC-DC-IC	PWM step-up/down, 180kHz, 5.3V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A54	eb	XC6367A542MR	DC-DC-IC	PWM step-up, 5.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A54	ej	XC6114A635MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A54	ek	XC6365A542MR	DC-DC-IC	PWM st-down, 180kHz, 5.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A54	et	XC9301A542MR	DC-DC-IC	PWM step-up/down, 180kHz, 5.4V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A55	eb	XC6367A552MR	DC-DC-IC	PWM step-up, 5.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A55	ej	XC6114A636MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A55	ek	XC6365A552MR	DC-DC-IC	PWM st-down, 180kHz, 5.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A55	et	XC9301A552MR	DC-DC-IC	PWM step-up/down, 180kHz, 5.5V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A56	eb	XC6367A562MR	DC-DC-IC	PWM step-up, 5.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A56	ej	XC6114A637MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A56	ek	XC6365A562MR	DC-DC-IC	PWM st-down, 180kHz, 5.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A56	et	XC9301A562MR	DC-DC-IC	PWM step-up/down, 180kHz, 5.6V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A57	-	OPA657N	Op-IC	Lo-noise, JFET, ±6.5V, 160V/V, 1.6GHz	SOT-23-5	28opa	OP1	6a	Ti
A57	eb	XC6367A572MR	DC-DC-IC	PWM step-up, 5.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A57	ej	XC6114A638MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A57	ek	XC6365A572MR	DC-DC-IC	PWM st-down, 180kHz, 5.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A57	et	XC9301A572MR	DC-DC-IC	PWM step-up/down, 180kHz, 5.7V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A58	-	OPA658N	Op-IC	Wide-band, Current Feedback, ±5V, 900MHz	SOT-23-5	28opa	OP1	6a	Bb
A58	eb	XC6367A582MR	DC-DC-IC	PWM step-up, 5.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A58	ej	XC6114A639MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A58	ek	XC6365A582MR	DC-DC-IC	PWM st-down, 180kHz, 5.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A58	et	XC9301A582MR	DC-DC-IC	PWM step-up/down, 180kHz, 5.8V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A58B	-	OPA658NB	Op-IC	Wide-band, Current Feedback, ±5V, 900MHz	SOT-23-5	28opa	OP1	6a	Bb
A59	eb	XC6367A592MR	DC-DC-IC	PWM step-up, 5.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A59	ej	XC6114A640MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A59	ek	XC6365A592MR	DC-DC-IC	PWM st-down, 180kHz, 5.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A59	et	XC9301A592MR	DC-DC-IC	PWM step-up/down, 180kHz, 5.9V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A5A	eb	XC6367A503MR	DC-DC-IC	PWM step-up, 5.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A5A	ej	XC6114A641MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5A	ek	XC6365A503MR	DC-DC-IC	PWM st-down, 300kHz, 5.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A5A	et	XC9301A503MR	DC-DC-IC	PWM step-up/down, 300kHz, 5.0V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A5B	eb	XC6367A513MR	DC-DC-IC	PWM step-up, 5.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A5B	ej	XC6114A642MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5B	ek	XC6365A513MR	DC-DC-IC	PWM st-down, 300kHz, 5.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A5B	et	XC9301A513MR	DC-DC-IC	PWM step-up/down, 300kHz, 5.1V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A5C	eb	XC6367A523MR	DC-DC-IC	PWM step-up, 5.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A5C	ej	XC6114A643MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5C	ek	XC6365A523MR	DC-DC-IC	PWM st-down, 300kHz, 5.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A5C	et	XC9301A523MR	DC-DC-IC	PWM step-up/down, 300kHz, 5.2V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A5D	eb	XC6367A533MR	DC-DC-IC	PWM step-up, 5.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A5D	ej	XC6114A644MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5D	ek	XC6365A533MR	DC-DC-IC	PWM st-down, 300kHz, 5.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A5D	et	XC9301A533MR	DC-DC-IC	PWM step-up/down, 300kHz, 5.3V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A5E	-	LN2351P1552S	DC-DC-IC	PFM step-up, 1.5V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A5E	eb	XC6367A543MR	DC-DC-IC	PWM step-up, 5.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A5E	ej	XC6114A645MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5E	ek	XC6365A543MR	DC-DC-IC	PWM st-down, 300kHz, 5.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A5E	et	XC9301A543MR	DC-DC-IC	PWM step-up/down, 300kHz, 5.4V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A5F	-	LN2351P1652S	DC-DC-IC	PFM step-up, 1.6V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A5F	eb	XC6367A553MR	DC-DC-IC	PWM step-up, 5.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A5F	ec	XC6114A616MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5F	ej	XC6114A646MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5F	ek	XC6365A553MR	DC-DC-IC	PWM st-down, 300kHz, 5.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A5F	et	XC9301A553MR	DC-DC-IC	PWM step-up/down, 300kHz, 5.5V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A5H	-	LN2351P1752S	DC-DC-IC	PFM step-up, 1.7V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A5H	eb	XC6367A563MR	DC-DC-IC	PWM step-up, 5.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A5H	ec	XC6114A617MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5H	ej	XC6114A647MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5H	ek	XC6365A563MR	DC-DC-IC	PWM st-down, 300kHz, 5.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A5H	et	XC9301A563MR	DC-DC-IC	PWM step-up/down, 300kHz, 5.6V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A5K	-	LN2351P1852S	DC-DC-IC	PFM step-up, 1.8V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A5K	eb	XC6367A573MR	DC-DC-IC	PWM step-up, 5.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A5K	ec	XC6114A618MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5K	ej	XC6114A648MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5K	ek	XC6365A573MR	DC-DC-IC	PWM st-down, 300kHz, 5.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A5K	et	XC9301A573MR	DC-DC-IC	PWM step-up/down, 300kHz, 5.7V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A5L	-	LN2351P1952S	DC-DC-IC	PFM step-up, 1.9V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A5L	eb	XC6367A583MR	DC-DC-IC	PWM step-up, 5.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A5L	ec	XC6114A619MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5L	ej	XC6114A649MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5L	ek	XC6365A583MR	DC-DC-IC	PWM st-down, 300kHz, 5.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A5L	et	XC9301A583MR	DC-DC-IC	PWM step-up/down, 300kHz, 5.8V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A5M	-	LN2351P2052S	DC-DC-IC	PFM st-up, 2.0V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A5M	eb	XC6367A593MR	DC-DC-IC	PWM step-up, 5.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A5M	ec	XC6114A620MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5M	ej	XC6114A650MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5M	ek	XC6365A593MR	DC-DC-IC	PWM st-down, 300kHz, 5.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A5M	et	XC9301A593MR	DC-DC-IC	PWM step-up/down, 300kHz, 5.9V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A5N	-	LN2351P2152S	DC-DC-IC	PFM st-up, 2.1V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A5N	ec	XC6114A621MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5P	-	LN2351P2252S	DC-DC-IC	PFM st-up, 2.2V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A5P	ec	XC6114A622MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5R	-	LN2351P2352S	DC-DC-IC	PFM st-up, 2.3V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A5R	ec	XC6114A623MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5S	-	LN2351P2452S	DC-DC-IC	PFM st-up, 2.4V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A5S	ec	XC6114A624MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5T	-	LN2351P2552S	DC-DC-IC	PFM st-up, 2.5V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A5T	ec	XC6114A625MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5U	-	LN2351P2652S	DC-DC-IC	PFM st-up, 2.6V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A5U	ec	XC6114A626MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5V	-	LN2351P2752S	DC-DC-IC	PFM st-up, 2.7V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A5V	ec	XC6114A627MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A5X	-	LN2351P2852S	DC-DC-IC	PFM st-up, 2.8V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A5X	ec	XC6114A628MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5Y	-	LN2351P2952S	DC-DC-IC	PFM st-up, 2.9V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A5Y	ec	XC6114A629MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
A5Z	-	LN2351P3052S	DC-DC-IC	PFM st-up, 3.0V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A5Z	ec	XC6114A630MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD19	6g	Tor
a6	-	BD45E261G-M	Vdet-IC	2.6V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
A6	-	BL8555-16AQ	LVR-IC	LDO, 1.6V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A6	-	BL8555-16ARA	LVR-IC	LDO, 1.6V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A6	-	BL8555-16ARB	LVR-IC	LDO, 1.6V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A6	-	LR8555-16AQ	LVR-IC	LDO, 1.6V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A6	-	LR8555-16ARA	LVR-IC	LDO, 1.6V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A6	-	LR8555-16ARB	LVR-IC	LDO, 1.6V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A6	-	R1111N261A	LVR-IC	LDO, Low noise, 2.6V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
A6	ea	BL8555-16KQ	LVR-IC	LDO, 1.6V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A6	ea	BL8555-16KRA	LVR-IC	LDO, 1.6V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A6	ea	BL8555-16KRB	LVR-IC	LDO, 1.6V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A6	ea	LR8555-16KQ	LVR-IC	LDO, 1.6V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A6	ea	LR8555-16KRA	LVR-IC	LDO, 1.6V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A6	ea	LR8555-16KRB	LVR-IC	LDO, 1.6V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A6	eu	BL8555-26KQ	LVR-IC	LDO, 2.6V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A6	eu	BL8555-26KRA	LVR-IC	LDO, 2.6V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A6	eu	BL8555-26KRB	LVR-IC	LDO, 2.6V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A6	eu	LR8555-26KQ	LVR-IC	LDO, 2.6V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A6	eu	LR8555-26KRA	LVR-IC	LDO, 2.6V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A6	eu	LR8555-26KRB	LVR-IC	LDO, 2.6V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A6	fg	BL8555-36KQ	LVR-IC	LDO, 3.6V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A6	fg	BL8555-36KRA	LVR-IC	LDO, 3.6V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A6	fg	BL8555-36KRB	LVR-IC	LDO, 3.6V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A6	fg	LR8555-36KQ	LVR-IC	LDO, 3.6V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A6	fg	LR8555-36KRA	LVR-IC	LDO, 3.6V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A6	fg	LR8555-36KRB	LVR-IC	LDO, 3.6V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A6	fh	BL8555-46KQ	LVR-IC	LDO, 4.6V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A6	fh	BL8555-46KRA	LVR-IC	LDO, 4.6V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A6	fh	BL8555-46KRB	LVR-IC	LDO, 4.6V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A6	fh	LR8555-46KQ	LVR-IC	LDO, 4.6V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A6	fh	LR8555-46KRA	LVR-IC	LDO, 4.6V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A6	fh	LR8555-46KRB	LVR-IC	LDO, 4.6V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A6	fk	BL8555-36AQ	LVR-IC	LDO, 3.6V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A6	fk	BL8555-36ARA	LVR-IC	LDO, 3.6V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A6	fk	BL8555-36ARB	LVR-IC	LDO, 3.6V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A6	fk	LR8555-36AQ	LVR-IC	LDO, 3.6V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A6	fk	LR8555-36ARA	LVR-IC	LDO, 3.6V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A6	fk	LR8555-36ARB	LVR-IC	LDO, 3.6V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A6	fm	BL8555-46AQ	LVR-IC	LDO, 4.6V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A6	fm	BL8555-46ARA	LVR-IC	LDO, 4.6V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A6	fm	BL8555-46ARB	LVR-IC	LDO, 4.6V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A6	fm	LR8555-46AQ	LVR-IC	LDO, 4.6V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A6	fm	LR8555-46ARA	LVR-IC	LDO, 4.6V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A6	fm	LR8555-46ARB	LVR-IC	LDO, 4.6V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A6	fp	BL8555-26AQ	LVR-IC	LDO, 2.6V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A6	fp	BL8555-26ARA	LVR-IC	LDO, 2.6V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A6	fp	BL8555-26ARB	LVR-IC	LDO, 2.6V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A6	fp	LR8555-26AQ	LVR-IC	LDO, 2.6V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A6	fp	LR8555-26ARA	LVR-IC	LDO, 2.6V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A6	fp	LR8555-26ARB	LVR-IC	LDO, 2.6V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A6-	-	RT9198-25PU5	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SC-70-5	28xm	VR4	6a	Rct
A60	-	LN2351P3152S	DC-DC-IC	PFM st-up, 3.1V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A60	eb	XC6367A602MR	DC-DC-IC	PWM step-up, 6.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A60	ej	XC6114B231MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A60	ek	XC6365A602MR	DC-DC-IC	PWM st-down, 180kHz, 6.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A60	et	XC9301A602MR	DC-DC-IC	PWM step-up/down, 180kHz, 6.0V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A61	-	LN2351P3252S	DC-DC-IC	PFM st-up, 3.2V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A61	eb	XC6367A612MR	DC-DC-IC	PWM step-up, 6.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A61	ej	XC6114B232MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A62	-	LN2351P3352S	DC-DC-IC	PFM st-up, 3.3V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A62	eb	XC6367A622MR	DC-DC-IC	PWM step-up, 6.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A62	ej	XC6114B233MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A63	-	LN2351P3452S	DC-DC-IC	PFM st-up, 3.4V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A63	eb	XC6367A632MR	DC-DC-IC	PWM step-up, 6.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A63	ej	XC6114B234MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A64	-	LN2351P3552S	DC-DC-IC	PFM st-up, 3.5V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A64	eb	XC6367A642MR	DC-DC-IC	PWM step-up, 6.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A64	ej	XC6114B235MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A65	-	LN2351P3652S	DC-DC-IC	PFM st-up, 3.6V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A65	eb	XC6367A652MR	DC-DC-IC	PWM step-up, 6.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A65	ej	XC6114B236MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A66	-	74AHC1G66GV	CMOS-Log	Single-pole single-throw analog switch	SOT753	28	Log16	6a	Nxp
A66	-	LN2351P3752S	DC-DC-IC	PFM st-up, 3.7V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A66	-	U74AHC1G66-AF5	CMOS-Log	Single-pole single-throw analog switch	SOT-23-5	28	Log16	6a	Utc
A66	-	U74AHC1G66-AL5	CMOS-Log	Single-pole single-throw analog switch	SOT-353	28	Log16	6a	Utc
A66	ej	XC6114B237MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A66L	-	U74AHC1G66L-AF5	CMOS-Log	Single-pole single-throw analog switch	SOT-23-5	28	Log16	6a	Utc
A66L	-	U74AHC1G66L-AL5	CMOS-Log	Single-pole single-throw analog switch	SOT-353	28	Log16	6a	Utc
A67	-	LN2351P3852S	DC-DC-IC	PFM st-up, 3.8V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A67	ej	XC6114B238MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A68	-	LN2351P3952S	DC-DC-IC	PFM st-up, 3.9V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A68	ej	XC6114B239MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A69	-	LN2351P4052S	DC-DC-IC	PFM st-up, 4.0V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A69	ej	XC6114B240MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6A	-	LN2351P4152S	DC-DC-IC	PFM st-up, 4.1V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6A	eb	XC6367A603MR	DC-DC-IC	PWM step-up, 6.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A6A	ej	XC6114B241MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6A	ek	XC6365A603MR	DC-DC-IC	PWM st-down, 300kHz, 6.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
A6A	et	XC9301A603MR	DC-DC-IC	PWM step-up/down, 300kHz, 6.0V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
A6B	-	LN2351P4252S	DC-DC-IC	PFM st-up, 4.2V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6B	eb	XC6367A613MR	DC-DC-IC	PWM step-up, 6.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A6B	ej	XC6114B242MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6C	-	LN2351P4352S	DC-DC-IC	PFM st-up, 4.3V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6C	eb	XC6367A623MR	DC-DC-IC	PWM step-up, 6.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A6C	ej	XC6114B243MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6D	-	LN2351P4452S	DC-DC-IC	PFM st-up, 4.4V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6D	eb	XC6367A633MR	DC-DC-IC	PWM step-up, 6.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A6D	ej	XC6114B244MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6E	-	LN2351P4552S	DC-DC-IC	PFM st-up, 4.5V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6E	eb	XC6367A643MR	DC-DC-IC	PWM step-up, 6.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A6E	ej	XC6114B245MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6F	-	LN2351P4652S	DC-DC-IC	PFM st-up, 4.6V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6F	eb	XC6367A653MR	DC-DC-IC	PWM step-up, 6.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
A6F	ec	XC6114B216MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6F	ej	XC6114B246MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6H	-	LN2351P4752S	DC-DC-IC	PFM st-up, 4.7V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6H	ec	XC6114B217MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6H	ej	XC6114B247MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6K	-	LN2351P4852S	DC-DC-IC	PFM st-up, 4.8V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6K	ec	XC6114B218MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6K	ej	XC6114B248MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6L	-	LN2351P4952S	DC-DC-IC	PFM st-up, 4.9V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6L	ec	XC6114B219MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6L	ej	XC6114B249MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6M	-	LN2351P5052S	DC-DC-IC	PFM st-up, 5.0V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6M	ec	XC6114B220MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6M	ej	XC6114B250MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6N	-	LN2351P5152S	DC-DC-IC	PFM st-up, 5.1V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6N	ec	XC6114B221MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6P	-	LN2351P5252S	DC-DC-IC	PFM st-up, 5.2V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6P	ec	XC6114B222MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6R	-	LN2351P5352S	DC-DC-IC	PFM st-up, 5.3V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6R	ec	XC6114B223MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6S	-	LN2351P5452S	DC-DC-IC	PFM st-up, 5.4V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6S	ec	XC6114B224MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6T	-	LN2351P5552S	DC-DC-IC	PFM st-up, 5.5V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6T	ec	XC6114B225MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6U	-	LN2351P5652S	DC-DC-IC	PFM st-up, 5.6V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6U	ec	XC6114B226MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6V	-	LN2351P5752S	DC-DC-IC	PFM st-up, 5.7V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6V	ec	XC6114B227MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6X	-	LN2351P5852S	DC-DC-IC	PFM st-up, 5.8V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6X	ec	XC6114B228MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6Y	-	LN2351P5952S	DC-DC-IC	PFM st-up, 5.9V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A6Y	ec	XC6114B229MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A6Z	-	LN2351P6052S	DC-DC-IC	PFM st-up, 6.0V±2%, 400mA, 300kHz, +CE	SOT-23-5	28sc	DC3	6g	Nln
A6Z	ec	XC6114B230MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
a7	-	74AUP1T57GW	CMOS-Log	Configurable gate with voltage-level translator	SOT-353-1	28	Log79	6a	Nxp
a7	-	BD45E271G-M	Vdet-IC	2.7V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
A7	-	BL8555-17AQ	LVR-IC	LDO, 1.7V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A7	-	BL8555-17ARA	LVR-IC	LDO, 1.7V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A7	-	BL8555-17ARB	LVR-IC	LDO, 1.7V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A7	-	EMA7	Si-pnp-Digi	Dual, 50V, 100mA, 150mW, 250MHz, R1/R2=4.7k/10k	EMT5	30/TD9	TD9	6a	Rhm
A7	-	FMA7A	Si-pnp-Digi	Dual, 50V, 100mA, 300mW, 250MHz, R1/R2=4.7k/10k	SC-74A	28	TD9	6a	Rhm
A7	-	LR8555-17AQ	LVR-IC	LDO, 1.7V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A7	-	LR8555-17ARA	LVR-IC	LDO, 1.7V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A7	-	LR8555-17ARB	LVR-IC	LDO, 1.7V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A7	-	R1111N271A	LVR-IC	LDO, Low noise, 2.7V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
A7	-	TC1014-5.0VRX	LVR-IC	LDO, 5.0V±2%, 50mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
A7	-	UMA7N	Si-pnp-Digi	Dual, 50V, 100mA, 150mW, 250MHz, R1/R2=4.7k/10k	SC-88A	28	TD9	6a	Rhm
A7	ea	BL8555-17KQ	LVR-IC	LDO, 1.7V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A7	ea	BL8555-17KRA	LVR-IC	LDO, 1.7V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A7	ea	BL8555-17KRB	LVR-IC	LDO, 1.7V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A7	ea	LR8555-17KQ	LVR-IC	LDO, 1.7V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A7	ea	LR8555-17KRA	LVR-IC	LDO, 1.7V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A7	ea	LR8555-17KRB	LVR-IC	LDO, 1.7V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A7	eu	BL8555-27KQ	LVR-IC	LDO, 2.7V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A7	eu	BL8555-27KRA	LVR-IC	LDO, 2.7V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A7	eu	BL8555-27KRB	LVR-IC	LDO, 2.7V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A7	eu	LR8555-27KQ	LVR-IC	LDO, 2.7V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A7	eu	LR8555-27KRA	LVR-IC	LDO, 2.7V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A7	eu	LR8555-27KRB	LVR-IC	LDO, 2.7V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A7	fg	BL8555-37KQ	LVR-IC	LDO, 3.7V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A7	fg	BL8555-37KRA	LVR-IC	LDO, 3.7V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A7	fg	BL8555-37KRB	LVR-IC	LDO, 3.7V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A7	fg	LR8555-37KQ	LVR-IC	LDO, 3.7V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A7	fg	LR8555-37KRA	LVR-IC	LDO, 3.7V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A7	fg	LR8555-37KRB	LVR-IC	LDO, 3.7V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A7	fh	BL8555-47KQ	LVR-IC	LDO, 4.7V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A7	fh	BL8555-47KRA	LVR-IC	LDO, 4.7V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A7	fh	BL8555-47KRB	LVR-IC	LDO, 4.7V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A7	fh	LR8555-47KQ	LVR-IC	LDO, 4.7V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A7	fh	LR8555-47KRA	LVR-IC	LDO, 4.7V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A7	fh	LR8555-47KRB	LVR-IC	LDO, 4.7V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A7	fk	BL8555-37AQ	LVR-IC	LDO, 3.7V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A7	fk	BL8555-37ARA	LVR-IC	LDO, 3.7V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A7	fk	BL8555-37ARB	LVR-IC	LDO, 3.7V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A7	fk	LR8555-37AQ	LVR-IC	LDO, 3.7V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A7	fk	LR8555-37ARA	LVR-IC	LDO, 3.7V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A7	fk	LR8555-37ARB	LVR-IC	LDO, 3.7V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A7	fm	BL8555-47APQ	LVR-IC	LDO, 4.7V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A7	fm	BL8555-47ARA	LVR-IC	LDO, 4.7V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A7	fm	BL8555-47ARB	LVR-IC	LDO, 4.7V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A7	fm	LR8555-47APQ	LVR-IC	LDO, 4.7V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A7	fm	LR8555-47ARA	LVR-IC	LDO, 4.7V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A7	fm	LR8555-47ARB	LVR-IC	LDO, 4.7V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A7	fp	BL8555-27AQ	LVR-IC	LDO, 2.7V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A7	fp	BL8555-27ARA	LVR-IC	LDO, 2.7V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A7	fp	BL8555-27ARB	LVR-IC	LDO, 2.7V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A7	fp	LR8555-27AQ	LVR-IC	LDO, 2.7V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A7	fp	LR8555-27ARA	LVR-IC	LDO, 2.7V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A7	fp	LR8555-27ARB	LVR-IC	LDO, 2.7V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A7-	-	RT9198-28PU5	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SC-70-5	28xm	VR4	6a	Rct
A70	ej	XC6114B331MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A71	ej	XC6114B332MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A72	ej	XC6114B333MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A73	ej	XC6114B334MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A74	-	LMV931MG	Op-IC	Lo-power, Vcc=1.8..5V, 1.4MHz, 0.35V/µs	SOT-23-5	28opf	OP1	6g	Nsc
A74	ej	XC6114B335MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A75	ej	XC6114B336MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A76	ej	XC6114B337MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A77	ej	XC6114B338MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A78	ej	XC6114B339MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A79	-	74AHC1G79GV	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT753	28	Log20	6a	Nxp



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A79	ej	XC6114B340MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A79A	-	LMV931MF	Op-IC	Lo-power, Vcc=1.8..5V, 1.4MHz, 0.35V/µs	SOT-23-5	28opf	OP1	6g	Nsc
A7A	ej	XC6114B341MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7B	ej	XC6114B342MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7C	ej	XC6114B343MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7D	ej	XC6114B344MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7E	ej	XC6114B345MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7F	ec	XC6114B316MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7F	ej	XC6114B346MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7H	ec	XC6114B317MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7H	ej	XC6114B347MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7K	ec	XC6114B318MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7K	ej	XC6114B348MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7L	ec	XC6114B319MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7L	ej	XC6114B349MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7M	ec	XC6114B320MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7M	ej	XC6114B350MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7N	ec	XC6114B321MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7P	ec	XC6114B322MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7R	ec	XC6114B323MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7S	ec	XC6114B324MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7T	ec	XC6114B325MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7U	ec	XC6114B326MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7V	ec	XC6114B327MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7X	ec	XC6114B328MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7Y	ec	XC6114B329MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A7Z	ec	XC6114B330MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
a8	-	74AUP1T58GW	CMOS-Log	Configurable gate with voltage-level translator	SOT-353-1	28	Log80	6a	Nxp
a8	-	BD45E281G-M	Vdet-IC	2.8V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
A8	-	BL8555-18AQ	LVR-IC	LDO, 1.8V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A8	-	BL8555-18ARA	LVR-IC	LDO, 1.8V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A8	-	BL8555-18ARB	LVR-IC	LDO, 1.8V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A8	-	EMA8	Si-pnp-Digi	Dual, 50V, 100mA, 150mW, 250MHz, R1/R2=10k/47k	EMT5	30/TD9	TD9	6a	Rhm
A8	-	FMA8A	Si-pnp-Digi	Dual, 50V, 100mA, 300mW, 250MHz, R1/R2=10k/47k	SC-74A	28	TD9	6a	Rhm
A8	-	HD74ALVC1G86VS	CMOS-Log	2-input EXCLUSIVE-OR gate	VSON-5	30	Log5	6a	Ren
A8	-	LR8555-18AQ	LVR-IC	LDO, 1.8V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A8	-	LR8555-18ARA	LVR-IC	LDO, 1.8V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A8	-	LR8555-18ARB	LVR-IC	LDO, 1.8V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A8	-	PI74ST1G08CX	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6a	Per
A8	-	PI74ST1G08TX	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6a	Per
A8	-	R1111N281A	LVR-IC	LDO, Low noise, 2.8V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
A8	-	TC1014-2.85VRX	LVR-IC	LDO, 2.85V±2%, 50mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
A8	-	UMA8N	Si-pnp-Digi	Dual, 50V, 100mA, 150mW, 250MHz, R1/R2=10k/47k	SC-88A	28	TD9	6a	Rhm
A8	ea	BL8555-18KQ	LVR-IC	LDO, 1.8V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A8	ea	BL8555-18KRA	LVR-IC	LDO, 1.8V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A8	ea	BL8555-18KRB	LVR-IC	LDO, 1.8V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A8	ea	LR8555-18KQ	LVR-IC	LDO, 1.8V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A8	ea	LR8555-18KRA	LVR-IC	LDO, 1.8V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A8	ea	LR8555-18KRB	LVR-IC	LDO, 1.8V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A8	eu	BL8555-28KQ	LVR-IC	LDO, 2.8V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A8	eu	BL8555-28KRA	LVR-IC	LDO, 2.8V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A8	eu	BL8555-28KRB	LVR-IC	LDO, 2.8V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A8	eu	LR8555-28KQ	LVR-IC	LDO, 2.8V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A8	eu	LR8555-28KRA	LVR-IC	LDO, 2.8V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A8	eu	LR8555-28KRB	LVR-IC	LDO, 2.8V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A8	fg	BL8555-38KQ	LVR-IC	LDO, 3.8V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A8	fg	BL8555-38KRA	LVR-IC	LDO, 3.8V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A8	fg	BL8555-38KRB	LVR-IC	LDO, 3.8V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A8	fg	LR8555-38KQ	LVR-IC	LDO, 3.8V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A8	fg	LR8555-38KRA	LVR-IC	LDO, 3.8V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A8	fg	LR8555-38KRB	LVR-IC	LDO, 3.8V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A8	fh	BL8555-48KQ	LVR-IC	LDO, 4.8V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A8	fh	BL8555-48KRA	LVR-IC	LDO, 4.8V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A8	fh	BL8555-48KRB	LVR-IC	LDO, 4.8V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A8	fh	LR8555-48KQ	LVR-IC	LDO, 4.8V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A8	fh	LR8555-48KRA	LVR-IC	LDO, 4.8V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A8	fh	LR8555-48KRB	LVR-IC	LDO, 4.8V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A8	fk	BL8555-38AQ	LVR-IC	LDO, 3.8V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A8	fk	BL8555-38ARA	LVR-IC	LDO, 3.8V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A8	fk	BL8555-38ARB	LVR-IC	LDO, 3.8V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A8	fk	LR8555-38AQ	LVR-IC	LDO, 3.8V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A8	fk	LR8555-38ARA	LVR-IC	LDO, 3.8V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A8	fk	LR8555-38ARB	LVR-IC	LDO, 3.8V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A8	fm	BL8555-48AQ	LVR-IC	LDO, 4.8V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A8	fm	BL8555-48ARA	LVR-IC	LDO, 4.8V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A8	fm	BL8555-48ARB	LVR-IC	LDO, 4.8V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A8	fm	LR8555-48AQ	LVR-IC	LDO, 4.8V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A8	fm	LR8555-48ARA	LVR-IC	LDO, 4.8V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A8	fm	LR8555-48ARB	LVR-IC	LDO, 4.8V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A8	fp	BL8555-28AQ	LVR-IC	LDO, 2.8V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A8	fp	BL8555-28ARA	LVR-IC	LDO, 2.8V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A8	fp	BL8555-28ARB	LVR-IC	LDO, 2.8V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A8	fp	LR8555-28AQ	LVR-IC	LDO, 2.8V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A8	fp	LR8555-28ARA	LVR-IC	LDO, 2.8V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A8	fp	LR8555-28ARB	LVR-IC	LDO, 2.8V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A8-	-	RT9198-30PU5	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SC-70-5	28xm	VR4	6a	Rct
A80	ej	XC6114B431MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A81	ej	XC6114B432MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A82	ej	XC6114B433MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A83	ej	XC6114B434MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A84	ej	XC6114B435MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A85	ej	XC6114B436MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A86	-	74AHC1G86GV	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT753	28	Log5	6a	Nxp
A86	-	U74AHC1G86-AF5	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-23-5	28	Log5	6a	Utc
A86	-	U74AHC1G86-AL5	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353	28	Log5	6a	Utc
A86	ej	XC6114B437MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A86L	-	U74AHC1G86L-AF5	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-23-5	28	Log5	6a	Utc
A86L	-	U74AHC1G86L-AL5	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353	28	Log5	6a	Utc
A87	ej	XC6114B438MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A88	ej	XC6114B439MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A89	ej	XC6114B440MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8A	-	XC6108C08AMR	Vdet-IC	0.8V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
A8A	ej	XC6114B441MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8B	-	XC6108C08BMR	Vdet-IC	0.8V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
A8B	ej	XC6114B442MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8C	-	XC6108C08CMR	Vdet-IC	0.8V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
A8C	ej	XC6114B443MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8D	-	XC6108C08DMR	Vdet-IC	0.8V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
A8D	ej	XC6114B444MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8E	ej	XC6114B445MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8F	ec	XC6114B416MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8F	ej	XC6114B446MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8H	ec	XC6114B417MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8H	ej	XC6114B447MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8K	ec	XC6114B418MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8K	ej	XC6114B448MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8L	ec	XC6114B419MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8L	ej	XC6114B449MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8M	ec	XC6114B420MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8M	ej	XC6114B450MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8N	ec	XC6114B421MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8P	ec	XC6114B422MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8R	ec	XC6114B423MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8S	ec	XC6114B424MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8T	ec	XC6114B425MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8U	ec	XC6114B426MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8V	ec	XC6114B427MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8X	ec	XC6114B428MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8Y	ec	XC6114B429MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A8Z	ec	XC6114B430MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
a9	-	BD45E291G-M	Vdet-IC	2.9V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
A9	-	74AHC1G09GW	CMOS-Log	2-input AND gate (ODO)	SOT-353-1	28	Log9	6a	Nxp
A9	-	BL8555-19AQ	LVR-IC	LDO, 1.9V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A9	-	BL8555-19ARA	LVR-IC	LDO, 1.9V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A9	-	BL8555-19ARB	LVR-IC	LDO, 1.9V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A9	-	FMA9A	Si-pnp-Digi	Dual, 50V, 100mA, 300mW, 250MHz, R1/R2=10k/10k	SC-74A	28	TD9	6a	Rhm
A9	-	HD74ALVC1G66VS	CMOS-Log	Single-pole single-throw analog switch	VSON-5	30	Log16	6a	Ren
A9	-	LR8555-19AQ	LVR-IC	LDO, 1.9V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A9	-	LR8555-19ARA	LVR-IC	LDO, 1.9V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A9	-	LR8555-19ARB	LVR-IC	LDO, 1.9V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A9	-	R1111N291A	LVR-IC	LDO, Low noise, 2.9V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
A9	-	TC1014-3.6VRX	LVR-IC	LDO, 3.6V±2%, 50mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
A9	ea	BL8555-19KQ	LVR-IC	LDO, 1.9V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A9	ea	BL8555-19KRA	LVR-IC	LDO, 1.9V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A9	ea	BL8555-19KRB	LVR-IC	LDO, 1.9V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A9	ea	LR8555-19KQ	LVR-IC	LDO, 1.9V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A9	ea	LR8555-19KRA	LVR-IC	LDO, 1.9V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A9	ea	LR8555-19KRB	LVR-IC	LDO, 1.9V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A9	ea	RN5VD09AA	Vdet-IC	0.9V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
A9	eu	BL8555-29KQ	LVR-IC	LDO, 2.9V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A9	eu	BL8555-29KRA	LVR-IC	LDO, 2.9V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A9	eu	BL8555-29KRB	LVR-IC	LDO, 2.9V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A9	eu	LR8555-29KQ	LVR-IC	LDO, 2.9V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A9	eu	LR8555-29KRA	LVR-IC	LDO, 2.9V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A9	eu	LR8555-29KRB	LVR-IC	LDO, 2.9V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A9	fg	BL8555-39KQ	LVR-IC	LDO, 3.9V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A9	fg	BL8555-39KRA	LVR-IC	LDO, 3.9V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A9	fg	BL8555-39KRB	LVR-IC	LDO, 3.9V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A9	fg	LR8555-39KQ	LVR-IC	LDO, 3.9V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A9	fg	LR8555-39KRA	LVR-IC	LDO, 3.9V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A9	fg	LR8555-39KRB	LVR-IC	LDO, 3.9V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A9	fh	BL8555-49KQ	LVR-IC	LDO, 4.9V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Shb
A9	fh	BL8555-49KRA	LVR-IC	LDO, 4.9V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Shb
A9	fh	BL8555-49KRB	LVR-IC	LDO, 4.9V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Shb
A9	fh	LR8555-49KQ	LVR-IC	LDO, 4.9V±2%, 50mA	SC-70-5	28ym	VR1	6kd	Lrc
A9	fh	LR8555-49KRA	LVR-IC	LDO, 4.9V±2%, 50mA	SOT-23-5	28ym	VR1	6kd	Lrc
A9	fh	LR8555-49KRB	LVR-IC	LDO, 4.9V±2%, 50mA	SOT-23-5	28c5	VR1	6kc	Lrc
A9	fk	BL8555-39AQ	LVR-IC	LDO, 3.9V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A9	fk	BL8555-39ARA	LVR-IC	LDO, 3.9V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A9	fk	BL8555-39ARB	LVR-IC	LDO, 3.9V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A9	fk	LR8555-39AQ	LVR-IC	LDO, 3.9V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A9	fk	LR8555-39ARA	LVR-IC	LDO, 3.9V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A9	fk	LR8555-39ARB	LVR-IC	LDO, 3.9V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A9	fm	BL8555-49AQ	LVR-IC	LDO, 4.9V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A9	fm	BL8555-49ARA	LVR-IC	LDO, 4.9V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A9	fm	BL8555-49ARB	LVR-IC	LDO, 4.9V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A9	fm	LR8555-49AQ	LVR-IC	LDO, 4.9V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A9	fm	LR8555-49ARA	LVR-IC	LDO, 4.9V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A9	fm	LR8555-49ARB	LVR-IC	LDO, 4.9V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A9	fp	BL8555-29AQ	LVR-IC	LDO, 2.9V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
A9	fp	BL8555-29ARA	LVR-IC	LDO, 2.9V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
A9	fp	BL8555-29ARB	LVR-IC	LDO, 2.9V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
A9	fp	LR8555-29AQ	LVR-IC	LDO, 2.9V±2%, 50mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
A9	fp	LR8555-29ARA	LVR-IC	LDO, 2.9V±2%, 50mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
A9	fp	LR8555-29ARB	LVR-IC	LDO, 2.9V±2%, 50mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
A9-	-	RT9198-33PU5	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SC-70-5	28xm	VR4	6a	Rct
A90	ej	XC6114B531MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A91	ej	XC6114B532MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A92	ej	XC6114B533MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A93	ej	XC6114B534MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A94	ej	XC6114B535MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A95	ej	XC6114B536MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A96	ej	XC6114B537MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A97	ej	XC6114B538MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A98	ej	XC6114B539MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A99	ej	XC6114B540MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9A	-	XC6108C09AMR	Vdet-IC	0.9V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
A9A	ej	XC6114B541MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9B	-	XC6108C09BMR	Vdet-IC	0.9V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
A9B	ej	XC6114B542MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9C	-	XC6108C09CMR	Vdet-IC	0.9V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
A9C	ej	XC6114B543MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9D	-	XC6108C09DMR	Vdet-IC	0.9V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
A9D	ej	XC6114B544MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9E	ej	XC6114B545MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9F	ec	XC6114B516MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9F	ej	XC6114B546MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9H	ec	XC6114B517MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9H	ej	XC6114B547MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9K	ec	XC6114B518MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A9K	ej	XC6114B548MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9L	ec	XC6114B519MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9L	ej	XC6114B549MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9M	ec	XC6114B520MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9M	ej	XC6114B550MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9N	ec	XC6114B521MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9P	ec	XC6114B522MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9R	ec	XC6114B523MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9S	ec	XC6114B524MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9T	ec	XC6114B525MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9U	ec	XC6114B526MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9V	ec	XC6114B527MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9X	ec	XC6114B528MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9Y	ec	XC6114B529MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
A9Z	ec	XC6114B530MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
Aa	-	BD48E23G	Vdet-IC	2.3V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
AA	-	μPA501T	Si-pnp	Dual, 60V, 100mA, 300mW, 180MHz	SOT-23-5	28	T12	6a	Nec
AA	-	μPA571T	Si-pnp	Dual, 60V, 100mA, 180MHz	SOT-23-5	28	T12	6a	Nec
AA	-	74AHC1G00GW	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6a	Nxp
AA	-	HD74ALVC1G14VS	CMOS-Log	Inverting Schmitt-trigger	VSON-5	30	Log7	6a	Ren
AA	-	PI74ST1G125CX	CMOS-Log	Bus buffer gate with 3-state output	SC-70-5	28	Log14	6a	Per
AA	-	PI74ST1G125TX	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log14	6a	Per
AA	-	RN5RT20AA	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
AA	-	SiP823LEU	Vdet-IC	4.63V±1.5%, MR, Strobe, -Reset PPO	SOT-23-5	28cp	VD17	6k	Vs
AA-	-	RT9198-15PU5	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SC-70-5	28xm	VR4	6a	Rct
AA0	-	XC6211A312MR	LVR-IC	LDO, 3.1V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AA0	-	XC6501A311MR-G	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AA0	ej	XC6114B631MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AA1	-	XC6211A322MR	LVR-IC	LDO, 3.2V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AA1	-	XC6501A321MR-G	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AA1	ej	XC6114B632MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AA2	-	XC6211A332MR	LVR-IC	LDO, 3.3V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AA2	-	XC6501A331MR-G	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AA2	ej	XC6114B633MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AA3	-	XC6211A342MR	LVR-IC	LDO, 3.4V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AA3	-	XC6501A341MR-G	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AA3	ej	XC6114B634MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AA4	-	XC6211A352MR	LVR-IC	LDO, 3.5V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AA4	-	XC6501A351MR-G	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AA4	ej	XC6114B635MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AA5	-	XC6211A362MR	LVR-IC	LDO, 3.6V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AA5	-	XC6501A361MR-G	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AA5	ej	XC6114B636MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AA6	-	XC6211A372MR	LVR-IC	LDO, 3.7V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AA6	-	XC6501A371MR-G	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AA6	ej	XC6114B637MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AA7	-	XC6211A382MR	LVR-IC	LDO, 3.8V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AA7	-	XC6501A381MR-G	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AA7	ej	XC6114B638MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AA8	-	XC6211A392MR	LVR-IC	LDO, 3.9V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AA8	-	XC6501A391MR-G	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AA8	ej	XC6114B639MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AA9	-	XC6211A402MR	LVR-IC	LDO, 4.0V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AA9	-	XC6501A401MR-G	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AA9	ej	XC6114B640MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAA	-	RP107N101B	LVR-IC	LDO, 1.0V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAA	-	XC6211A412MR	LVR-IC	LDO, 4.1V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AAA	-	XC6501A411MR-G	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AAA	ej	XC6114B641MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAAA	-	MAX8877EZK15-T	LVR-IC	LDO, 1.5V±1.4%, 150mA, +CE	SOT-23-5T	28vrx	VR7	6k	Max
AAAB	-	MAX8877EZK18-T	LVR-IC	LDO, 1.8V±1.4%, 150mA, +CE	SOT-23-5T	28vrx	VR7	6k	Max
AAAC	-	MAX8877EZK25-T	LVR-IC	LDO, 2.5V±1.4%, 150mA, +CE	SOT-23-5T	28vrx	VR7	6k	Max
AAAD	-	MAX8877EZK28-T	LVR-IC	LDO, 2.8V±1.4%, 150mA, +CE	SOT-23-5T	28vrx	VR7	6k	Max
AAAE	-	MAX8877EZK30-T	LVR-IC	LDO, 3.0V±1.4%, 150mA, +CE	SOT-23-5T	28vrx	VR7	6k	Max
AAAF	-	MAX8877EZK32-T	LVR-IC	LDO, 3.15V±1.4%, 150mA, +CE	SOT-23-5T	28vrx	VR7	6k	Max
AAAG	-	MAX8877EZK33-T	LVR-IC	LDO, 3.3V±1.4%, 150mA, +CE	SOT-23-5T	28vrx	VR7	6k	Max
AAAH	-	MAX8877EZK36-T	LVR-IC	LDO, 3.6V±1.4%, 150mA, +CE	SOT-23-5T	28vrx	VR7	6k	Max
AAAI	-	MAX8877EZK50-T	LVR-IC	LDO, 5.0V±1.4%, 150mA, +CE	SOT-23-5T	28vrx	VR7	6k	Max
AAAJ	-	MAX8878EZK15-T	LVR-IC	LDO, 1.5V±1.4%, 150mA, +CE, CL	SOT-23-5T	28vrx	VR7	6k	Max
AAAK	-	MAX8878EZK18-T	LVR-IC	LDO, 1.8V±1.4%, 150mA, +CE, CL	SOT-23-5T	28vrx	VR7	6k	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AAAL	-	MAX8878EZK25-T	LVR-IC	LDO, 2.5V±1.4%, 150mA, +CE, CL	SOT-23-5T	28vrx	VR7	6k	Max
AAAM	-	MAX8878EZK28-T	LVR-IC	LDO, 2.8V±1.4%, 150mA, +CE, CL	SOT-23-5T	28vrx	VR7	6k	Max
AAAN	-	MAX8878EZK30-T	LVR-IC	LDO, 3.0V±1.4%, 150mA, +CE, CL	SOT-23-5T	28vrx	VR7	6k	Max
AAAO	-	MAX8878EZK32-T	LVR-IC	LDO, 3.15V±1.4%, 150mA, +CE, CL	SOT-23-5T	28vrx	VR7	6k	Max
AAAP	-	MAX8878EZK33-T	LVR-IC	LDO, 3.3V±1.4%, 150mA, +CE, CL	SOT-23-5T	28vrx	VR7	6k	Max
AAAQ	-	MAX8878EZK36-T	LVR-IC	LDO, 3.6V±1.4%, 150mA, +CE, CL	SOT-23-5T	28vrx	VR7	6k	Max
AAAR	-	MAX8878EZK50-T	LVR-IC	LDO, 5.0V±1.4%, 150mA, +CE, CL	SOT-23-5T	28vrx	VR7	6k	Max
AAB	-	RP107N111B	LVR-IC	LDO, 1.1V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAB	-	XC6211A422MR	LVR-IC	LDO, 4.2V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AAB	-	XC6501A421MR-G	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AAB	ej	XC6114B642MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AABE	-	MAX8863TEUK-T	LVR-IC	LDO, 3.15V±1.4%, 120mA, +CE, Set	SOT-23-5	28vrv	VR5	6k	Max
AABF	-	MAX8863SEUK-T	LVR-IC	LDO, 2.84V±1.4%, 120mA, +CE, Set	SOT-23-5	28vrv	VR5	6k	Max
AABG	-	MAX8864TEUK-T	LVR-IC	LDO, 3.15V±1.4%, 120mA, +CE, Set	SOT-23-5	28vrv	VR5	6k	Max
AABH	-	MAX8864SEUK-T	LVR-IC	LDO, 2.84V±1.4%, 120mA, +CE,Set	SOT-23-5	28vrv	VR5	6k	Max
AABV	-	MAX8863REUK-T	LVR-IC	LDO, 2.8V±1.4%, 120mA, +CE, Set	SOT-23-5	28vrv	VR5	6k	Max
AABW	-	MAX8864REUK-T	LVR-IC	LDO, 2.8V±1.4%, 120mA, +CE, Set	SOT-23-5	28vrv	VR5	6k	Max
AABY	-	MAX4165EUK-T	Op-IC	GP, ±1.35..±3.25V, 5MHz, Icco=1.2mA, Vg=120dB	SOT-23-5	28opa	OP1	6k	Max
AAC	-	PAM3101DAB150	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Pam
AAC	-	PAM3101DUB150	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Pam
AAC	-	RP107N121B	LVR-IC	LDO, 1.2V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAC	-	XC6211A432MR	LVR-IC	LDO, 4.3V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AAC	-	XC6501A431MR-G	LVR-IC	LDO, 4.3V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AAC	ej	XC6114B643MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAD	-	RP107N131B	LVR-IC	LDO, 1.3V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAD	-	XC6211A442MR	LVR-IC	LDO, 4.4V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AAD	-	XC6501A441MR-G	LVR-IC	LDO, 4.4V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AAD	ej	XC6114B644MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAE	-	PAM3101DAB180	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Pam
AAE	-	PAM3101DUB180	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Pam
AAE	-	RP107N141B	LVR-IC	LDO, 1.4V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAE	-	XC6211A452MR	LVR-IC	LDO, 4.5V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AAE	-	XC6501A451MR-G	LVR-IC	LDO, 4.5V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AAE	ej	XC6114B645MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAF	-	RP107N151B	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAF	-	XC6211A462MR	LVR-IC	LDO, 4.6V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AAF	-	XC6501A461MR-G	LVR-IC	LDO, 4.6V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AAF	ec	XC6114B616MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAF	ej	XC6114B646MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAG	-	PAM3101DAB250	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Pam
AAG	-	PAM3101DUB250	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Pam
AAG	-	RP107N161B	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAH	-	PAM3101DAB280	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Pam
AAH	-	PAM3101DUB280	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Pam
AAH	-	RP107N171B	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAH	-	XC6211A472MR	LVR-IC	LDO, 4.7V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AAH	-	XC6501A471MR-G	LVR-IC	LDO, 4.7V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AAH	ec	XC6114B617MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAH	ej	XC6114B647MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAI	-	PAM3101DAB285	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Pam
AAI	-	PAM3101DUB285	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Pam
AAJ	-	PAM3101DAB300	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Pam
AAJ	-	PAM3101DUB300	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Pam
AAJ	-	RP107N181B	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAK	-	PAM3101DAB330	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Pam
AAK	-	PAM3101DUB330	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Pam
AAK	-	RP107N191B	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAK	-	XC6211A482MR	LVR-IC	LDO, 4.8V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AAK	-	XC6501A481MR-G	LVR-IC	LDO, 4.8V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AAK	ec	XC6114B618MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAK	ej	XC6114B648MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAL	-	RP107N201B	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAL	-	XC6211A492MR	LVR-IC	LDO, 4.9V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AAL	-	XC6501A491MR-G	LVR-IC	LDO, 4.9V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AAL	ec	XC6114B619MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAL	ej	XC6114B649MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAM	-	PAM3101DBA400	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Pam
AAM	-	PAM3101DUB400	LVR-IC	LDO, 4.0V±2%, 300m, +CEA	SC-70-5L	28vrx	VR7	6k	Pam
AAM	-	RP107N211B	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAM	-	XC6211A502MR	LVR-IC	LDO, 5.0V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AAM	-	XC6501A501MR-G	LVR-IC	LDO, 5.0V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AAM	ec	XC6114B620MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAM	ej	XC6114B650MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAN	-	RP107N221B	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAN	ec	XC6114B621MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAO	-	PAM3101DAB380	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Pam
AAO	-	PAM3101DUB380	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Pam
AAP	-	PAM3101DAB310	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Pam
AAP	-	PAM3101DUB310	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Pam
AAP	-	RP107N231B	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAP	ec	XC6114B622MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAQ	-	PAM3101DAB290	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Pam
AAQ	-	PAM3101DUB290	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Pam
AAQ	-	RP107N241B	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAR	-	RP107N251B	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAR	ec	XC6114B623MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAS	-	RP107N261B	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAS	ec	XC6114B624MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAT	-	PAM3101DBA475	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Pam
AAT	-	PAM3101DUB475	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Pam
AAT	-	RP107N271B	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAT	ec	XC6114B625MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAU	-	RP107N281B	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAU	ec	XC6114B626MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAV	-	RP107N291B	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAV	ec	XC6114B627MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAW	-	RP107N301B	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAX	-	RP107N311B	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAX	ec	XC6114B628MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAY	-	RP107N321B	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAY	ec	XC6114B629MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
AAZ	-	RP107N331B	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
AAZ	ec	XC6114B630MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD19	6g	Tor
Ab	-	BD48E24G	Vdet-IC	2.4V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
AB	-	74AHC1G02GW	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6a	Nxp
AB	-	HD74ALVC1G125VS	CMOS-Log	Bus buffer gate with 3-state output	VSON-5	30	Log14	6a	Ren
AB	-	PI74ST1G126CX	CMOS-Log	Bus buffer gate with 3-state output	SC-70-5	28	Log13	6a	Per
AB	-	PI74ST1G126TX	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log13	6a	Per
AB	-	RN5RT21AA	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
AB	-	SiP823MEU	Vdet-IC	4.38V±1.5%, MR, Strobe, -Reset PPO	SOT-23-5	28cp	VD17	6k	Vs
AB-	-	RT9193-15PU5	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
AB0	-	XC6211B312MR	LVR-IC	LDO, 3.1V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AB0	-	XC6501B311MR-G	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AB0	ej	XC6114C231MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AB1	-	XC6211B322MR	LVR-IC	LDO, 3.2V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AB1	-	XC6501B321MR-G	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AB1	ej	XC6114C232MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AB15	-	AMC7635-1.5DB	LVR-IC	LDO, 1.5V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB15	-	AMC7635-1.5Y	LVR-IC	LDO, 1.5V±1.5%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Adt
AB15	ew	AMC7635-1.5DBFT	LVR-IC	LDO, 1.5V±1.5%, 300mA, +CE, Green process	SOT-23-5	28vrx	VR7	6a	Adt
AB15	ew	AMC7635-1.5YG	LVR-IC	LDO, 1.5V±1.5%, 300mA, +CE, Green process	TSOT-23-5	28vrx	VR7	6a	Adt
AB18	-	AMC7635-1.8DB	LVR-IC	LDO, 1.8V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB18	-	AMC7635-1.8Y	LVR-IC	LDO, 1.8V±1.5%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Adt
AB18	-	AMC8878-1.8DBT	LVR-IC	LDO, 1.8V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB18	ew	AMC7635-1.8DBFT	LVR-IC	LDO, 1.8V±1.5%, 300mA, +CE, Green process	SOT-23-5	28vrx	VR7	6a	Adt
AB18	ew	AMC7635-1.8YG	LVR-IC	LDO, 1.8V±1.5%, 300mA, +CE, Green process	TSOT-23-5	28vrx	VR7	6a	Adt
AB2	-	XC6211B332MR	LVR-IC	LDO, 3.3V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AB2	-	XC6501B331MR-G	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AB2	ej	XC6114C233MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AB20	-	AMC7635-2.0DB	LVR-IC	LDO, 2.0V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB20	-	AMC7635-2.0Y	LVR-IC	LDO, 2.0V±1.5%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Adt
AB20	-	AMC8878-2.0DBT	LVR-IC	LDO, 2.0V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB20	ew	AMC7635-2.0DBFT	LVR-IC	LDO, 2.0V±1.5%, 300mA, +CE, Green process	SOT-23-5	28vrx	VR7	6a	Adt
AB20	ew	AMC7635-2.0YG	LVR-IC	LDO, 2.0V±1.5%, 300mA, +CE, Green process	TSOT-23-5	28vrx	VR7	6a	Adt
AB25	-	AMC7635-2.5DB	LVR-IC	LDO, 2.5V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB25	-	AMC7635-2.5Y	LVR-IC	LDO, 2.5V±1.5%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Adt
AB25	-	AMC8878-2.5DBT	LVR-IC	LDO, 2.5V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB25	ew	AMC7635-2.5DBFT	LVR-IC	LDO, 2.5V±1.5%, 300mA, +CE, Green process	SOT-23-5	28vrx	VR7	6a	Adt
AB25	ew	AMC7635-2.5YG	LVR-IC	LDO, 2.5V±1.5%, 300mA, +CE, Green process	TSOT-23-5	28vrx	VR7	6a	Adt
AB27	-	AMC7635-2.7DB	LVR-IC	LDO, 2.7V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AB27	-	AMC7635-2.7Y	LVR-IC	LDO, 2.7V±1.5%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Adt
AB27	ew	AMC7635-2.7DBFT	LVR-IC	LDO, 2.7V±1.5%, 300mA, +CE, Green process	SOT-23-5	28vrx	VR7	6a	Adt
AB27	ew	AMC7635-2.7YG	LVR-IC	LDO, 2.7V±1.5%, 300mA, +CE, Green process	TSOT-23-5	28vrx	VR7	6a	Adt
AB28	-	AMC7635-2.8DB	LVR-IC	LDO, 2.8V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB28	-	AMC7635-2.8Y	LVR-IC	LDO, 2.8V±1.5%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Adt
AB28	-	AMC8878-2.8DBT	LVR-IC	LDO, 2.8V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB28	ew	AMC7635-2.8DBFT	LVR-IC	LDO, 2.8V±1.5%, 300mA, +CE, Green process	SOT-23-5	28vrx	VR7	6a	Adt
AB28	ew	AMC7635-2.8YG	LVR-IC	LDO, 2.8V±1.5%, 300mA, +CE, Green process	TSOT-23-5	28vrx	VR7	6a	Adt
AB285	-	AMC7635-2.85DB	LVR-IC	LDO, 2.85V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB285	-	AMC7635-2.85Y	LVR-IC	LDO, 2.85V±1.5%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Adt
AB285	ew	AMC7635-2.85DBFT	LVR-IC	LDO, 2.85V±1.5%, 300mA, +CE, Green process	SOT-23-5	28vrx	VR7	6a	Adt
AB285	ew	AMC7635-2.85YG	LVR-IC	LDO, 2.85V±1.5%, 300mA, +CE, Green process	TSOT-23-5	28vrx	VR7	6a	Adt
AB29	-	AMC7635-2.9DB	LVR-IC	LDO, 2.9V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB29	-	AMC7635-2.9Y	LVR-IC	LDO, 2.9V±1.5%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Adt
AB29	ew	AMC7635-2.9DBFT	LVR-IC	LDO, 2.9V±1.5%, 300mA, +CE, Green process	SOT-23-5	28vrx	VR7	6a	Adt
AB29	ew	AMC7635-2.9YG	LVR-IC	LDO, 2.9V±1.5%, 300mA, +CE, Green process	TSOT-23-5	28vrx	VR7	6a	Adt
AB2U	-	AMC8878-2.85DBT	LVR-IC	LDO, 2.85V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB3	-	XC6211B342MR	LVR-IC	LDO, 3.4V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AB3	-	XC6501B341MR-G	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AB3	ej	XC6114C234MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AB30	-	AMC7635-3.0DB	LVR-IC	LDO, 3.0V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB30	-	AMC7635-3.0Y	LVR-IC	LDO, 3.0V±1.5%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Adt
AB30	-	AMC8878-3.0DBT	LVR-IC	LDO, 3.0V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB30	ew	AMC7635-3.0DBFT	LVR-IC	LDO, 3.0V±1.5%, 300mA, +CE, Green process	SOT-23-5	28vrx	VR7	6a	Adt
AB30	ew	AMC7635-3.0YG	LVR-IC	LDO, 3.0V±1.5%, 300mA, +CE, Green process	TSOT-23-5	28vrx	VR7	6a	Adt
AB31	-	AMC7635-3.1DB	LVR-IC	LDO, 3.1V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB31	-	AMC7635-3.1Y	LVR-IC	LDO, 3.1V±1.5%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Adt
AB31	ew	AMC7635-3.1DBFT	LVR-IC	LDO, 3.1V±1.5%, 300mA, +CE, Green process	SOT-23-5	28vrx	VR7	6a	Adt
AB31	ew	AMC7635-3.1YG	LVR-IC	LDO, 3.1V±1.5%, 300mA, +CE, Green process	TSOT-23-5	28vrx	VR7	6a	Adt
AB32	-	AMC8878-3.2DBT	LVR-IC	LDO, 3.2V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB33	-	AMC7635-3.3DB	LVR-IC	LDO, 3.3V±1.5%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB33	-	AMC7635-3.3Y	LVR-IC	LDO, 3.3V±1.5%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Adt
AB33	-	AMC8878-3.3DBT	LVR-IC	LDO, 3.3V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB33	ew	AMC7635-3.3DBFT	LVR-IC	LDO, 3.3V±1.5%, 300mA, +CE, Green process	SOT-23-5	28vrx	VR7	6a	Adt
AB33	ew	AMC7635-3.3YG	LVR-IC	LDO, 3.3V±1.5%, 300mA, +CE, Green process	TSOT-23-5	28vrx	VR7	6a	Adt
AB4	-	XC6211B352MR	LVR-IC	LDO, 3.5V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AB4	-	XC6501B351MR-G	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AB4	ej	XC6114C235MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AB5	-	XC6211B362MR	LVR-IC	LDO, 3.6V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AB5	-	XC6501B361MR-G	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AB5	eb	XC6367A151MR	DC-DC-IC	PWM step-up, 1.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AB5	ej	XC6114C236MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AB5	ek	XC6365A151MR	DC-DC-IC	PWM st-down, 100kHz, 1.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AB50	-	AMC8878-5.0DBT	LVR-IC	LDO, 5.0V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Adt
AB6	-	XC6211B372MR	LVR-IC	LDO, 3.7V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AB6	-	XC6501B371MR-G	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AB6	eb	XC6367A161MR	DC-DC-IC	PWM step-up, 1.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AB6	ej	XC6114C237MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AB6	ek	XC6365A161MR	DC-DC-IC	PWM st-down, 100kHz, 1.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AB7	-	APL5102-13BI	LVR-IC	LDO, 1.3V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
AB7	-	XC6211B382MR	LVR-IC	LDO, 3.8V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AB7	-	XC6501B381MR-G	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AB7	eb	XC6367A171MR	DC-DC-IC	PWM step-up, 1.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AB7	ej	XC6114C238MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AB7	ek	XC6365A171MR	DC-DC-IC	PWM st-down, 100kHz, 1.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AB8	-	APL5102-14BI	LVR-IC	LDO, 1.4V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
AB8	-	XC6211B392MR	LVR-IC	LDO, 3.9V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AB8	-	XC6501B391MR-G	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AB8	eb	XC6367A181MR	DC-DC-IC	PWM step-up, 1.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AB8	ej	XC6114C239MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AB8	ek	XC6365A181MR	DC-DC-IC	PWM st-down, 100kHz, 1.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AB9	-	APL5102-15BI	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
AB9	-	XC6211B402MR	LVR-IC	LDO, 4.0V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AB9	-	XC6501B401MR-G	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AB9	eb	XC6367A191MR	DC-DC-IC	PWM step-up, 1.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AB9	ej	XC6114C240MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AB9	ek	XC6365A191MR	DC-DC-IC	PWM st-down, 100kHz, 1.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ABA	-	APL5102-16BI	LVR-IC	LDO, 1.6V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABA	-	RP107N101D	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABA	-	XC6211B412MR	LVR-IC	LDO, 4.1V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABA	-	XC6501B411MR-G	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ABA	ej	XC6114C241MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABAA	-	V6300ASP5B	Vdet-IC	2.0V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6a	Em
ABAB	-	V6300BSP5B	Vdet-IC	2.4V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6a	Em
ABAC	-	V6300CSP5B	Vdet-IC	2.8V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6a	Em
ABAD	-	V6300DSP5B	Vdet-IC	3.5V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6a	Em
ABAE	-	V6300ESP5B	Vdet-IC	4V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6a	Em
ABAF	-	V6300FSP5B	Vdet-IC	4.5V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6a	Em
ABAG	-	V6300GSP5B	Vdet-IC	2.0V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6a	Em
ABAH	-	V6300HSP5B	Vdet-IC	2.4V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6a	Em
ABAI	-	V6300ISP5B	Vdet-IC	2.8V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6a	Em
ABAJ	-	V6300JSP5B	Vdet-IC	3.5V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6a	Em
ABAK	-	V6300KSP5B	Vdet-IC	4V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6a	Em
ABAL	-	V6300LSP5B	Vdet-IC	4.5V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6a	Em
ABAM	-	V6300MSP5B	Vdet-IC	2.0V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6a	Em
ABAN	-	V6300NSP5B	Vdet-IC	2.4V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6a	Em
ABAO	-	MAX6306UK50D1-T	Vdet-IC	5.0V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABAO	-	V6300OSP5B	Vdet-IC	2.8V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6a	Em
ABAP	-	MAX6306UK50D2-T	Vdet-IC	5.0V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABAP	-	V6300PSP5B	Vdet-IC	3.5V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6a	Em
ABAQ	-	MAX6306UK50D3-T	Vdet-IC	5.0V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABAQ	-	V6300QSP5B	Vdet-IC	4V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6a	Em
ABAR	-	MAX6306UK50D4-T	Vdet-IC	5.0V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABAR	-	V6300RSP5B	Vdet-IC	4.5V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6a	Em
ABAS	-	MAX6306UK49D1-T	Vdet-IC	4.9V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABAT	-	MAX6306UK49D2-T	Vdet-IC	4.9V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABAU	-	MAX6306UK49D3-T	Vdet-IC	4.9V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABAV	-	MAX6306UK49D4-T	Vdet-IC	4.9V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABAV	-	MAX6309UK30D2-T	Vdet-IC	3.0V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABAW	-	MAX6306UK48D1-T	Vdet-IC	4.8V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABAX	-	MAX6306UK48D2-T	Vdet-IC	4.8V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABAY	-	MAX6306UK48D3-T	Vdet-IC	4.8V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABAZ	-	MAX6306UK48D4-T	Vdet-IC	4.8V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABB	-	APL5102-17BI	LVR-IC	LDO, 1.7V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABB	-	RP107N111D	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABB	-	XC6211B422MR	LVR-IC	LDO, 4.2V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
ABB	-	XC6501B421MR-G	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ABB	ej	XC6114C242MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABBA	-	MAX6306UK47D1-T	Vdet-IC	4.7V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABBB	-	MAX6306UK47D2-T	Vdet-IC	4.7V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABBC	-	MAX6306UK47D3-T	Vdet-IC	4.7V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABBD	-	MAX6306UK47D4-T	Vdet-IC	4.7V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABBE	-	MAX6306UK46D1-T	Vdet-IC	4.6V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABBF	-	MAX6306UK46D2-T	Vdet-IC	4.6V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABBG	-	MAX6306UK46D3-T	Vdet-IC	4.6V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABBH	-	MAX6306UK46D4-T	Vdet-IC	4.6V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABBI	-	MAX6306UK45D1-T	Vdet-IC	4.5V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABBJ	-	MAX6306UK45D2-T	Vdet-IC	4.5V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABBK	-	MAX6306UK45D3-T	Vdet-IC	4.5V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABBL	-	MAX6306UK45D4-T	Vdet-IC	4.5V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABBM	-	MAX6306UK44D1-T	Vdet-IC	4.4V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABBN	-	MAX6306UK44D2-T	Vdet-IC	4.4V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABBO	-	MAX6306UK44D3-T	Vdet-IC	4.4V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABBP	-	MAX6306UK44D4-T	Vdet-IC	4.4V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABBQ	-	MAX6306UK43D1-T	Vdet-IC	4.3V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABBR	-	MAX6306UK43D2-T	Vdet-IC	4.3V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABBS	-	MAX6306UK43D3-T	Vdet-IC	4.3V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABBT	-	MAX6306UK43D4-T	Vdet-IC	4.3V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABBU	-	MAX6306UK42D1-T	Vdet-IC	4.2V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABBV	-	MAX6306UK42D2-T	Vdet-IC	4.2V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABBW	-	MAX6306UK42D3-T	Vdet-IC	4.2V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABBX	-	MAX6306UK42D4-T	Vdet-IC	4.2V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABBY	-	MAX6306UK41D1-T	Vdet-IC	4.1V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABBZ	-	MAX6306UK41D2-T	Vdet-IC	4.1V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABC	-	APL5102-18BI	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABC	-	RP107N121D	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABC	-	XC6211B432MR	LVR-IC	LDO, 4.3V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
ABC	-	XC6501B431MR-G	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ABC	ej	XC6114C243MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABCA	-	MAX6306UK41D3-T	Vdet-IC	4.1V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABCB	-	MAX6306UK41D4-T	Vdet-IC	4.1V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABCC	-	MAX6306UK40D1-T	Vdet-IC	4.0V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABCD	-	MAX6306UK40D2-T	Vdet-IC	4.0V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABCE	-	MAX6306UK40D3-T	Vdet-IC	4.0V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABCF	-	MAX6306UK40D4-T	Vdet-IC	4.0V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABCG	-	MAX6306UK39D1-T	Vdet-IC	3.9V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABCH	-	MAX6306UK39D2-T	Vdet-IC	3.9V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABCI	-	MAX6306UK39D3-T	Vdet-IC	3.9V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABCJ	-	MAX6306UK39D4-T	Vdet-IC	3.9V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABCK	-	MAX6306UK38D1-T	Vdet-IC	3.8V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABCL	-	MAX6306UK38D2-T	Vdet-IC	3.8V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABCM	-	MAX6306UK38D3-T	Vdet-IC	3.8V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABCN	-	MAX6306UK38D4-T	Vdet-IC	3.8V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABCO	-	MAX6306UK37D1-T	Vdet-IC	3.7V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABCP	-	MAX6306UK37D2-T	Vdet-IC	3.7V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABCQ	-	MAX6306UK37D3-T	Vdet-IC	3.7V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABCR	-	MAX6306UK37D4-T	Vdet-IC	3.7V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABCS	-	MAX6306UK36D1-T	Vdet-IC	3.6V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABCT	-	MAX6306UK36D2-T	Vdet-IC	3.6V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABCU	-	MAX6306UK36D3-T	Vdet-IC	3.6V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABCV	-	MAX6306UK36D4-T	Vdet-IC	3.6V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABCW	-	MAX6306UK35D1-T	Vdet-IC	3.5V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABCX	-	MAX6306UK35D2-T	Vdet-IC	3.5V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABCY	-	MAX6306UK35D3-T	Vdet-IC	3.5V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABCZ	-	MAX6306UK35D4-T	Vdet-IC	3.5V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABD	-	APL5102-19BI	LVR-IC	LDO, 1.9V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABD	-	RP107N131D	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABD	-	XC6211B442MR	LVR-IC	LDO, 4.4V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
ABD	-	XC6501B441MR-G	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ABD	ej	XC6114C244MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABDA	-	MAX6306UK34D1-T	Vdet-IC	3.4V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABDB	-	MAX6306UK34D2-T	Vdet-IC	3.4V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABDC	-	MAX6306UK34D3-T	Vdet-IC	3.4V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABDD	-	MAX6306UK34D4-T	Vdet-IC	3.4V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABDE	-	MAX6306UK33D1-T	Vdet-IC	3.3V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABDF	-	MAX6306UK33D2-T	Vdet-IC	3.3V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABDG	-	MAX6306UK33D3-T	Vdet-IC	3.3V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABDH	-	MAX6306UK33D4-T	Vdet-IC	3.3V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABDI	-	MAX6306UK32D1-T	Vdet-IC	3.2V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABDJ	-	MAX6306UK32D2-T	Vdet-IC	3.2V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABDK	-	MAX6306UK32D3-T	Vdet-IC	3.2V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABDL	-	MAX6306UK32D4-T	Vdet-IC	3.2V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABDM	-	MAX6306UK31D1-T	Vdet-IC	3.1V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABDN	-	MAX6306UK31D2-T	Vdet-IC	3.1V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABDO	-	MAX6306UK31D3-T	Vdet-IC	3.1V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABDP	-	MAX6306UK31D4-T	Vdet-IC	3.1V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABDQ	-	MAX6306UK30D1-T	Vdet-IC	3.0V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABDR	-	MAX6306UK30D2-T	Vdet-IC	3.0V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABDS	-	MAX6306UK30D3-T	Vdet-IC	3.0V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABDT	-	MAX6306UK30D4-T	Vdet-IC	3.0V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABDU	-	MAX6306UK29D1-T	Vdet-IC	2.9V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABDV	-	MAX6306UK29D2-T	Vdet-IC	2.9V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABDW	-	MAX6306UK29D3-T	Vdet-IC	2.9V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABDX	-	MAX6306UK29D4-T	Vdet-IC	2.9V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABDY	-	MAX6306UK28D1-T	Vdet-IC	2.8V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABDZ	-	MAX6306UK28D2-T	Vdet-IC	2.8V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABE	-	APL5102-20BI	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABE	-	RP107N141D	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABE	-	XC6211B452MR	LVR-IC	LDO, 4.5V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
ABE	-	XC6501B451MR-G	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ABE	ej	XC6114C245MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABEA	-	MAX6306UK28D3-T	Vdet-IC	2.8V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABEB	-	MAX6306UK28D4-T	Vdet-IC	2.8V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABEC	-	MAX6306UK27D1-T	Vdet-IC	2.7V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABED	-	MAX6306UK27D2-T	Vdet-IC	2.7V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABEE	-	MAX6306UK27D3-T	Vdet-IC	2.7V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABEF	-	MAX6306UK27D4-T	Vdet-IC	2.7V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABEG	-	MAX6306UK26D1-T	Vdet-IC	2.6V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABEH	-	MAX6306UK26D2-T	Vdet-IC	2.6V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABEI	-	MAX6306UK26D3-T	Vdet-IC	2.6V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABEJ	-	MAX6306UK26D4-T	Vdet-IC	2.6V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABEK	-	MAX6306UK25D1-T	Vdet-IC	2.5V±1.5%, -MR, -Reset ODO, 1ms	SOT-23-5	28ek	VD4	6k	Max
ABEL	-	MAX6306UK25D2-T	Vdet-IC	2.5V±1.5%, -MR, -Reset ODO, 20ms	SOT-23-5	28ek	VD4	6k	Max
ABEM	-	MAX6306UK25D3-T	Vdet-IC	2.5V±1.5%, -MR, -Reset ODO, 140ms	SOT-23-5	28ek	VD4	6k	Max
ABEN	-	MAX6306UK25D4-T	Vdet-IC	2.5V±1.5%, -MR, -Reset ODO, 1120ms	SOT-23-5	28ek	VD4	6k	Max
ABEO	-	MAX6307UK50D1-T	Vdet-IC	5.0V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABEP	-	MAX6307UK50D2-T	Vdet-IC	5.0V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABEQ	-	MAX6307UK50D3-T	Vdet-IC	5.0V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABER	-	MAX6307UK50D4-T	Vdet-IC	5.0V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABES	-	MAX6307UK49D1-T	Vdet-IC	4.9V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABET	-	MAX6307UK49D2-T	Vdet-IC	4.9V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABEU	-	MAX6307UK49D3-T	Vdet-IC	4.9V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABEV	-	MAX6307UK49D4-T	Vdet-IC	4.9V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABEW	-	MAX6307UK48D1-T	Vdet-IC	4.8V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABEX	-	MAX6307UK48D2-T	Vdet-IC	4.8V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABEY	-	MAX6307UK48D3-T	Vdet-IC	4.8V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABEZ	-	MAX6307UK48D4-T	Vdet-IC	4.8V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABF	-	APL5102-21BI	LVR-IC	LDO, 2.1V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABF	-	RP107N151D	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABF	-	XC6211B462MR	LVR-IC	LDO, 4.6V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
ABF	-	XC6501B461MR-G	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ABF	eb	XC6367A155MR	DC-DC-IC	PWM step-up, 1.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ABF	ec	XC6114C216MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABF	ej	XC6114C246MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABF	ek	XC6365A155MR	DC-DC-IC	PWM st-down, 500kHz, 1.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ABFA	-	MAX6307UK47D1-T	Vdet-IC	4.7V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABFB	-	MAX6307UK47D2-T	Vdet-IC	4.7V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABFC	-	MAX6307UK47D3-T	Vdet-IC	4.7V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABFD	-	MAX6307UK47D4-T	Vdet-IC	4.7V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABFE	-	MAX6307UK46D1-T	Vdet-IC	4.6V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABFF	-	MAX6307UK46D2-T	Vdet-IC	4.6V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABFG	-	MAX6307UK46D3-T	Vdet-IC	4.6V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABFH	-	MAX6307UK46D4-T	Vdet-IC	4.6V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABFI	-	MAX6307UK45D1-T	Vdet-IC	4.5V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABFJ	-	MAX6307UK45D2-T	Vdet-IC	4.5V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABFK	-	MAX6307UK45D3-T	Vdet-IC	4.5V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABFL	-	MAX6307UK45D4-T	Vdet-IC	4.5V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABFM	-	MAX6307UK44D1-T	Vdet-IC	4.4V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABFN	-	MAX6307UK44D2-T	Vdet-IC	4.4V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABFO	-	MAX6307UK44D3-T	Vdet-IC	4.4V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABFP	-	MAX6307UK44D4-T	Vdet-IC	4.4V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABFQ	-	MAX6307UK43D1-T	Vdet-IC	4.3V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABFR	-	MAX6307UK43D2-T	Vdet-IC	4.3V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABFS	-	MAX6307UK43D3-T	Vdet-IC	4.3V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABFT	-	MAX6307UK43D4-T	Vdet-IC	4.3V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABFU	-	MAX6307UK42D1-T	Vdet-IC	4.2V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABFV	-	MAX6307UK42D2-T	Vdet-IC	4.2V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABFW	-	MAX6307UK42D3-T	Vdet-IC	4.2V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABFX	-	MAX6307UK42D4-T	Vdet-IC	4.2V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABFY	-	MAX6307UK41D1-T	Vdet-IC	4.1V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABFZ	-	MAX6307UK41D2-T	Vdet-IC	4.1V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABG	-	APL5102-22BI	LVR-IC	LDO, 2.2V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABG	-	RP107N161D	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABGA	-	MAX6307UK41D3-T	Vdet-IC	4.1V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABGB	-	MAX6307UK41D4-T	Vdet-IC	4.1V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABGC	-	MAX6307UK40D1-T	Vdet-IC	4.0V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABGD	-	MAX6307UK40D2-T	Vdet-IC	4.0V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABGE	-	MAX6307UK40D3-T	Vdet-IC	4.0V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABGF	-	MAX6307UK40D4-T	Vdet-IC	4.0V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABGG	-	MAX6307UK39D1-T	Vdet-IC	3.9V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABGH	-	MAX6307UK39D2-T	Vdet-IC	3.9V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABGI	-	MAX6307UK39D3-T	Vdet-IC	3.9V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABGJ	-	MAX6307UK39D4-T	Vdet-IC	3.9V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABGK	-	MAX6307UK38D1-T	Vdet-IC	3.8V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABGL	-	MAX6307UK38D2-T	Vdet-IC	3.8V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABGM	-	MAX6307UK38D3-T	Vdet-IC	3.8V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABGN	-	MAX6307UK38D4-T	Vdet-IC	3.8V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABGO	-	MAX6307UK37D1-T	Vdet-IC	3.7V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABGP	-	MAX6307UK37D2-T	Vdet-IC	3.7V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABGQ	-	MAX6307UK37D3-T	Vdet-IC	3.7V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABGR	-	MAX6307UK37D4-T	Vdet-IC	3.7V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABGS	-	MAX6307UK36D1-T	Vdet-IC	3.6V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABGT	-	MAX6307UK36D2-T	Vdet-IC	3.6V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABGU	-	MAX6307UK36D3-T	Vdet-IC	3.6V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABGV	-	MAX6307UK36D4-T	Vdet-IC	3.6V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABGW	-	MAX6307UK35D1-T	Vdet-IC	3.5V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABGX	-	MAX6307UK35D2-T	Vdet-IC	3.5V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABGY	-	MAX6307UK35D3-T	Vdet-IC	3.5V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABGZ	-	MAX6307UK35D4-T	Vdet-IC	3.5V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABH	-	APL5102-23BI	LVR-IC	LDO, 2.3V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABH	-	RP107N171D	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABH	-	XC6211B472MR	LVR-IC	LDO, 4.7V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
ABH	-	XC6501B471MR-G	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ABH	eb	XC6367A165MR	DC-DC-IC	PWM step-up, 1.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ABH	ec	XC6114C217MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABH	ej	XC6114C247MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABH	ek	XC6365A165MR	DC-DC-IC	PWM st-down, 500kHz, 1.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ABHA	-	MAX6307UK34D1-T	Vdet-IC	3.4V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABHB	-	MAX6307UK34D2-T	Vdet-IC	3.4V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABHC	-	MAX6307UK34D3-T	Vdet-IC	3.4V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABHD	-	MAX6307UK34D4-T	Vdet-IC	3.4V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABHE	-	MAX6307UK33D1-T	Vdet-IC	3.3V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABHF	-	MAX6307UK33D2-T	Vdet-IC	3.3V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABHG	-	MAX6307UK33D3-T	Vdet-IC	3.3V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABHH	-	MAX6307UK33D4-T	Vdet-IC	3.3V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABHI	-	MAX6307UK32D1-T	Vdet-IC	3.2V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABHJ	-	MAX6307UK32D2-T	Vdet-IC	3.2V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABHK	-	MAX6307UK32D3-T	Vdet-IC	3.2V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABHL	-	MAX6307UK32D4-T	Vdet-IC	3.2V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABHM	-	MAX6307UK31D1-T	Vdet-IC	3.1V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABHN	-	MAX6307UK31D2-T	Vdet-IC	3.1V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABHO	-	MAX6307UK31D3-T	Vdet-IC	3.1V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABHP	-	MAX6307UK31D4-T	Vdet-IC	3.1V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABHQ	-	MAX6307UK30D1-T	Vdet-IC	3.0V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABHR	-	MAX6307UK30D2-T	Vdet-IC	3.0V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABHS	-	MAX6307UK30D3-T	Vdet-IC	3.0V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABHT	-	MAX6307UK30D4-T	Vdet-IC	3.0V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABHU	-	MAX6307UK29D1-T	Vdet-IC	2.9V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABHV	-	MAX6307UK29D2-T	Vdet-IC	2.9V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABHW	-	MAX6307UK29D3-T	Vdet-IC	2.9V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABHX	-	MAX6307UK29D4-T	Vdet-IC	2.9V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABHY	-	MAX6307UK28D1-T	Vdet-IC	2.8V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABHZ	-	MAX6307UK28D2-T	Vdet-IC	2.8V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABI	-	APL5102-24BI	LVR-IC	LDO, 2.4V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABIA	-	MAX6307UK28D3-T	Vdet-IC	2.8V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABIB	-	MAX6307UK28D4-T	Vdet-IC	2.8V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABIC	-	MAX6307UK27D1-T	Vdet-IC	2.7V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABID	-	MAX6307UK27D2-T	Vdet-IC	2.7V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABIE	-	MAX6307UK27D3-T	Vdet-IC	2.7V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABIF	-	MAX6307UK27D4-T	Vdet-IC	2.7V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABIG	-	MAX6307UK26D1-T	Vdet-IC	2.6V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABIH	-	MAX6307UK26D2-T	Vdet-IC	2.6V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABII	-	MAX6307UK26D3-T	Vdet-IC	2.6V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABIJ	-	MAX6307UK26D4-T	Vdet-IC	2.6V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABIK	-	MAX6307UK25D1-T	Vdet-IC	2.5V±1.5%, OVIn, -Reset ODO, 1ms	SOT-23-5	28em	VD13	6k	Max
ABIL	-	MAX6307UK25D2-T	Vdet-IC	2.5V±1.5%, OVIn, -Reset ODO, 20ms	SOT-23-5	28em	VD13	6k	Max
ABIM	-	MAX6307UK25D3-T	Vdet-IC	2.5V±1.5%, OVIn, -Reset ODO, 140ms	SOT-23-5	28em	VD13	6k	Max
ABIN	-	MAX6307UK25D4-T	Vdet-IC	2.5V±1.5%, OVIn, -Reset ODO, 1120ms	SOT-23-5	28em	VD13	6k	Max
ABIS	-	MAX6309UK50D1-T	Vdet-IC	5.0V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABIT	-	MAX6309UK50D2-T	Vdet-IC	5.0V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABIU	-	MAX6309UK50D3-T	Vdet-IC	5.0V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABIV	-	MAX6309UK50D4-T	Vdet-IC	5.0V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABIW	-	MAX6309UK49D1-T	Vdet-IC	4.9V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABIX	-	MAX6309UK49D2-T	Vdet-IC	4.9V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABIY	-	MAX6309UK49D3-T	Vdet-IC	4.9V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABIZ	-	MAX6309UK49D4-T	Vdet-IC	4.9V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABJ	-	APL5102-25BI	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABJ	-	RP107N181D	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABJA	-	MAX6309UK48D1-T	Vdet-IC	4.8V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABJB	-	MAX6309UK48D2-T	Vdet-IC	4.8V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABJC	-	MAX6309UK48D3-T	Vdet-IC	4.8V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABJD	-	MAX6309UK48D4-T	Vdet-IC	4.8V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABJE	-	MAX6309UK47D1-T	Vdet-IC	4.7V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABJF	-	MAX6309UK47D2-T	Vdet-IC	4.7V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABJG	-	MAX6309UK47D3-T	Vdet-IC	4.7V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABJH	-	MAX6309UK47D4-T	Vdet-IC	4.7V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABJI	-	MAX6309UK46D1-T	Vdet-IC	4.6V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABJJ	-	MAX6309UK46D2-T	Vdet-IC	4.6V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABJK	-	MAX6309UK46D3-T	Vdet-IC	4.6V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABJL	-	MAX6309UK46D4-T	Vdet-IC	4.6V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABJM	-	MAX6309UK45D1-T	Vdet-IC	4.5V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABJN	-	MAX6309UK45D2-T	Vdet-IC	4.5V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABJO	-	MAX6309UK45D3-T	Vdet-IC	4.5V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABJP	-	MAX6309UK45D4-T	Vdet-IC	4.5V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABJQ	-	MAX6309UK44D1-T	Vdet-IC	4.4V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABJR	-	MAX6309UK44D2-T	Vdet-IC	4.4V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABJS	-	MAX6309UK44D3-T	Vdet-IC	4.4V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABJT	-	MAX6309UK44D4-T	Vdet-IC	4.4V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABJU	-	MAX6309UK43D1-T	Vdet-IC	4.3V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABJV	-	MAX6309UK43D2-T	Vdet-IC	4.3V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABJW	-	MAX6309UK43D3-T	Vdet-IC	4.3V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABJX	-	MAX6309UK43D4-T	Vdet-IC	4.3V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABJY	-	MAX6309UK42D1-T	Vdet-IC	4.2V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABJZ	-	MAX6309UK42D2-T	Vdet-IC	4.2V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABK	-	APL5102-26BI	LVR-IC	LDO, 2.6V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABK	-	RP107N191D	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABK	-	XC6211B482MR	LVR-IC	LDO, 4.8V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
ABK	-	XC6501B481MR-G	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ABK	eb	XC6367A175MR	DC-DC-IC	PWM step-up, 1.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ABK	ec	XC6114C218MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABK	ej	XC6114C248MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABK	ek	XC6365A175MR	DC-DC-IC	PWM st-down, 500kHz, 1.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ABKA	-	MAX6309UK42D3-T	Vdet-IC	4.2V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABKB	-	MAX6309UK42D4-T	Vdet-IC	4.2V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABKC	-	MAX6309UK41D1-T	Vdet-IC	4.1V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABKD	-	MAX6309UK41D2-T	Vdet-IC	4.1V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABKE	-	MAX6309UK41D3-T	Vdet-IC	4.1V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABKF	-	MAX6309UK41D4-T	Vdet-IC	4.1V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABKG	-	MAX6309UK40D1-T	Vdet-IC	4.0V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABKH	-	MAX6309UK40D2-T	Vdet-IC	4.0V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABKI	-	MAX6309UK40D3-T	Vdet-IC	4.0V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABKJ	-	MAX6309UK40D4-T	Vdet-IC	4.0V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABKK	-	MAX6309UK39D1-T	Vdet-IC	3.9V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABKL	-	MAX6309UK39D2-T	Vdet-IC	3.9V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABKM	-	MAX6309UK39D3-T	Vdet-IC	3.9V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABKN	-	MAX6309UK39D4-T	Vdet-IC	3.9V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABKO	-	MAX6309UK38D1-T	Vdet-IC	3.8V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABKP	-	MAX6309UK38D2-T	Vdet-IC	3.8V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABKQ	-	MAX6309UK38D3-T	Vdet-IC	3.8V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABKR	-	MAX6309UK38D4-T	Vdet-IC	3.8V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABKS	-	MAX6309UK37D1-T	Vdet-IC	3.7V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABKT	-	MAX6309UK37D2-T	Vdet-IC	3.7V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABKU	-	MAX6309UK37D3-T	Vdet-IC	3.7V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABKV	-	MAX6309UK37D4-T	Vdet-IC	3.7V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABKW	-	MAX6309UK36D1-T	Vdet-IC	3.6V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABKX	-	MAX6309UK36D2-T	Vdet-IC	3.6V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABKY	-	MAX6309UK36D3-T	Vdet-IC	3.6V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABKZ	-	MAX6309UK36D4-T	Vdet-IC	3.6V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABL	-	APL5102-27BI	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABL	-	RP107N201D	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABL	-	XC6211B492MR	LVR-IC	LDO, 4.9V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
ABL	-	XC6501B491MR-G	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ABL	eb	XC6367A185MR	DC-DC-IC	PWM step-up, 1.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ABL	ec	XC6114C219MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABL	ej	XC6114C249MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABL	ek	XC6365A185MR	DC-DC-IC	PWM st-down, 500kHz, 1.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ABLA	-	MAX6309UK35D1-T	Vdet-IC	3.5V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABLB	-	MAX6309UK35D2-T	Vdet-IC	3.5V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABLC	-	MAX6309UK35D3-T	Vdet-IC	3.5V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABLD	-	MAX6309UK35D4-T	Vdet-IC	3.5V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABLE	-	MAX6309UK34D1-T	Vdet-IC	3.4V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABLF	-	MAX6309UK34D2-T	Vdet-IC	3.4V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABLG	-	MAX6309UK34D3-T	Vdet-IC	3.4V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABLH	-	MAX6309UK34D4-T	Vdet-IC	3.4V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABLI	-	MAX6309UK33D1-T	Vdet-IC	3.3V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABLJ	-	MAX6309UK33D2-T	Vdet-IC	3.3V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABLK	-	MAX6309UK33D3-T	Vdet-IC	3.3V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABLL	-	MAX6309UK33D4-T	Vdet-IC	3.3V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABLM	-	MAX6309UK32D1-T	Vdet-IC	3.2V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABLN	-	MAX6309UK32D2-T	Vdet-IC	3.2V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABLO	-	MAX6309UK32D3-T	Vdet-IC	3.2V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABLP	-	MAX6309UK32D4-T	Vdet-IC	3.2V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABLQ	-	MAX6309UK31D1-T	Vdet-IC	3.1V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABLR	-	MAX6309UK31D2-T	Vdet-IC	3.1V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABLS	-	MAX6309UK31D3-T	Vdet-IC	3.1V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABLT	-	MAX6309UK31D4-T	Vdet-IC	3.1V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABLU	-	MAX6309UK30D1-T	Vdet-IC	3.0V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABLW	-	MAX6309UK30D3-T	Vdet-IC	3.0V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABLX	-	MAX6309UK30D4-T	Vdet-IC	3.0V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABLY	-	MAX6309UK29D1-T	Vdet-IC	2.9V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABLZ	-	MAX6309UK29D2-T	Vdet-IC	2.9V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABM	-	APL5102-28BI	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABM	-	RP107N211D	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABM	-	XC6211B502MR	LVR-IC	LDO, 5.0V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
ABM	-	XC6501B501MR-G	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ABM	eb	XC6367A195MR	DC-DC-IC	PWM step-up, 1.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ABM	ec	XC6114C220MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABM	ej	XC6114C250MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABM	ek	XC6365A195MR	DC-DC-IC	PWM st-down, 500kHz, 1.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ABMA	-	MAX6309UK29D3-T	Vdet-IC	2.9V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABMB	-	MAX6309UK29D4-T	Vdet-IC	2.9V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABMC	-	MAX6309UK28D1-T	Vdet-IC	2.8V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABMD	-	MAX6309UK28D2-T	Vdet-IC	2.8V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABME	-	MAX6309UK28D3-T	Vdet-IC	2.8V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABMF	-	MAX6309UK28D4-T	Vdet-IC	2.8V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABMG	-	MAX6309UK27D1-T	Vdet-IC	2.7V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABMH	-	MAX6309UK27D2-T	Vdet-IC	2.7V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABMI	-	MAX6309UK27D3-T	Vdet-IC	2.7V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABMJ	-	MAX6309UK27D4-T	Vdet-IC	2.7V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABMK	-	MAX6309UK26D1-T	Vdet-IC	2.6V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABML	-	MAX6309UK26D2-T	Vdet-IC	2.6V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABMM	-	MAX6309UK26D3-T	Vdet-IC	2.6V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABMN	-	MAX6309UK26D4-T	Vdet-IC	2.6V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABMO	-	MAX6309UK25D1-T	Vdet-IC	2.5V±1.5%, -MR, -Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABMP	-	MAX6309UK25D2-T	Vdet-IC	2.5V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABMQ	-	MAX6309UK25D3-T	Vdet-IC	2.5V±1.5%, -MR, -Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABMR	-	MAX6309UK25D4-T	Vdet-IC	2.5V±1.5%, -MR, -Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABMS	-	MAX6310UK50D1-T	Vdet-IC	5.0V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABMT	-	MAX6310UK50D2-T	Vdet-IC	5.0V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABMU	-	MAX6310UK50D3-T	Vdet-IC	5.0V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABMV	-	MAX6310UK50D4-T	Vdet-IC	5.0V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABMW	-	MAX6310UK49D1-T	Vdet-IC	4.9V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABMX	-	MAX6310UK49D2-T	Vdet-IC	4.9V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABMY	-	MAX6310UK49D3-T	Vdet-IC	4.9V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABMZ	-	MAX6310UK49D4-T	Vdet-IC	4.9V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABN	-	APL5102-29BI	LVR-IC	LDO, 2.9V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABN	-	RP107N221D	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABN	ec	XC6114C221MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABNA	-	MAX6310UK48D1-T	Vdet-IC	4.8V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABNB	-	MAX6310UK48D2-T	Vdet-IC	4.8V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABNC	-	MAX6310UK48D3-T	Vdet-IC	4.8V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABND	-	MAX6310UK48D4-T	Vdet-IC	4.8V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABNE	-	MAX6310UK47D1-T	Vdet-IC	4.7V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABNF	-	MAX6310UK47D2-T	Vdet-IC	4.7V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABNG	-	MAX6310UK47D3-T	Vdet-IC	4.7V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABNH	-	MAX6310UK47D4-T	Vdet-IC	4.7V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABNI	-	MAX6310UK46D1-T	Vdet-IC	4.6V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABNJ	-	MAX6310UK46D2-T	Vdet-IC	4.6V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABNK	-	MAX6310UK46D3-T	Vdet-IC	4.6V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABNL	-	MAX6310UK46D4-T	Vdet-IC	4.6V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABNM	-	MAX6310UK45D1-T	Vdet-IC	4.5V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABNN	-	MAX6310UK45D2-T	Vdet-IC	4.5V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABNO	-	MAX6310UK45D3-T	Vdet-IC	4.5V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABNP	-	MAX6310UK45D4-T	Vdet-IC	4.5V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABNQ	-	MAX6310UK44D1-T	Vdet-IC	4.4V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABNR	-	MAX6310UK44D2-T	Vdet-IC	4.4V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABNS	-	MAX6310UK44D3-T	Vdet-IC	4.4V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABNT	-	MAX6310UK44D4-T	Vdet-IC	4.4V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABNU	-	MAX6310UK43D1-T	Vdet-IC	4.3V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABNV	-	MAX6310UK43D2-T	Vdet-IC	4.3V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABNW	-	MAX6310UK43D3-T	Vdet-IC	4.3V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABNX	-	MAX6310UK43D4-T	Vdet-IC	4.3V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABNY	-	MAX6310UK42D1-T	Vdet-IC	4.2V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABNZ	-	MAX6310UK42D2-T	Vdet-IC	4.2V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABO	-	APL5102-30BI	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABOA	-	MAX6310UK42D3-T	Vdet-IC	4.2V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABOB	-	MAX6310UK42D4-T	Vdet-IC	4.2V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABOC	-	MAX6310UK41D1-T	Vdet-IC	4.1V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABOD	-	MAX6310UK41D2-T	Vdet-IC	4.1V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABOE	-	MAX6310UK41D3-T	Vdet-IC	4.1V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABOF	-	MAX6310UK41D4-T	Vdet-IC	4.1V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABOG	-	MAX6310UK40D1-T	Vdet-IC	4.0V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABOH	-	MAX6310UK40D2-T	Vdet-IC	4.0V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABOI	-	MAX6310UK40D3-T	Vdet-IC	4.0V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABOJ	-	MAX6310UK40D4-T	Vdet-IC	4.0V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABOK	-	MAX6310UK39D1-T	Vdet-IC	3.9V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABOL	-	MAX6310UK39D2-T	Vdet-IC	3.9V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABOM	-	MAX6310UK39D3-T	Vdet-IC	3.9V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABON	-	MAX6310UK39D4-T	Vdet-IC	3.9V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABOO	-	MAX6310UK38D1-T	Vdet-IC	3.8V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABOP	-	MAX6310UK38D2-T	Vdet-IC	3.8V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABOQ	-	MAX6310UK38D3-T	Vdet-IC	3.8V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABOR	-	MAX6310UK38D4-T	Vdet-IC	3.8V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABOS	-	MAX6310UK37D1-T	Vdet-IC	3.7V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABOT	-	MAX6310UK37D2-T	Vdet-IC	3.7V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABOU	-	MAX6310UK37D3-T	Vdet-IC	3.7V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABOV	-	MAX6310UK37D4-T	Vdet-IC	3.7V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABOW	-	MAX6310UK36D1-T	Vdet-IC	3.6V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABOX	-	MAX6310UK36D2-T	Vdet-IC	3.6V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABOY	-	MAX6310UK36D3-T	Vdet-IC	3.6V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABOZ	-	MAX6310UK36D4-T	Vdet-IC	3.6V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABP	-	APL5102-31BI	LVR-IC	LDO, 3.1V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABP	-	RP107N231D	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABP	ec	XC6114C222MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABPA	-	MAX6310UK35D1-T	Vdet-IC	3.5V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABPB	-	MAX6310UK35D2-T	Vdet-IC	3.5V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABPC	-	MAX6310UK35D3-T	Vdet-IC	3.5V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABPD	-	MAX6310UK35D4-T	Vdet-IC	3.5V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABPE	-	MAX6310UK34D1-T	Vdet-IC	3.4V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABPF	-	MAX6310UK34D2-T	Vdet-IC	3.4V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABPG	-	MAX6310UK34D3-T	Vdet-IC	3.4V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABPH	-	MAX6310UK34D4-T	Vdet-IC	3.4V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABPI	-	MAX6310UK33D1-T	Vdet-IC	3.3V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABPJ	-	MAX6310UK33D2-T	Vdet-IC	3.3V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABPK	-	MAX6310UK33D3-T	Vdet-IC	3.3V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABPL	-	MAX6310UK33D4-T	Vdet-IC	3.3V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABPM	-	MAX6310UK32D1-T	Vdet-IC	3.2V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABPN	-	MAX6310UK32D2-T	Vdet-IC	3.2V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABPO	-	MAX6310UK32D3-T	Vdet-IC	3.2V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABPP	-	MAX6310UK32D4-T	Vdet-IC	3.2V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABPQ	-	MAX6310UK31D1-T	Vdet-IC	3.1V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABPR	-	MAX6310UK31D2-T	Vdet-IC	3.1V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABPS	-	MAX6310UK31D3-T	Vdet-IC	3.1V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABPT	-	MAX6310UK31D4-T	Vdet-IC	3.1V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABPU	-	MAX6310UK30D1-T	Vdet-IC	3.0V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABPV	-	MAX6310UK30D2-T	Vdet-IC	3.0V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABPW	-	MAX6310UK30D3-T	Vdet-IC	3.0V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABPX	-	MAX6310UK30D4-T	Vdet-IC	3.0V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABPY	-	MAX6310UK29D1-T	Vdet-IC	2.9V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABPZ	-	MAX6310UK29D2-T	Vdet-IC	2.9V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABQ	-	APL5102-32BI	LVR-IC	LDO, 3.2V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABQ	-	RP107N241D	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABQA	-	MAX6310UK29D3-T	Vdet-IC	2.9V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABQB	-	MAX6310UK29D4-T	Vdet-IC	2.9V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABQC	-	MAX6310UK28D1-T	Vdet-IC	2.8V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABQD	-	MAX6310UK28D2-T	Vdet-IC	2.8V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABQE	-	MAX6310UK28D3-T	Vdet-IC	2.8V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABQF	-	MAX6310UK28D4-T	Vdet-IC	2.8V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABQG	-	MAX6310UK27D1-T	Vdet-IC	2.7V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABQH	-	MAX6310UK27D2-T	Vdet-IC	2.7V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABQI	-	MAX6310UK27D3-T	Vdet-IC	2.7V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABQJ	-	MAX6310UK27D4-T	Vdet-IC	2.7V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABQK	-	MAX6310UK26D1-T	Vdet-IC	2.6V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABQL	-	MAX6310UK26D2-T	Vdet-IC	2.6V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABQM	-	MAX6310UK26D3-T	Vdet-IC	2.6V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABQN	-	MAX6310UK26D4-T	Vdet-IC	2.6V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABQO	-	MAX6310UK25D1-T	Vdet-IC	2.5V±1.5%, OVIn, -Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABQP	-	MAX6310UK25D2-T	Vdet-IC	2.5V±1.5%, OVIn, -Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABQQ	-	MAX6310UK25D3-T	Vdet-IC	2.5V±1.5%, OVIn, -Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABQR	-	MAX6310UK25D4-T	Vdet-IC	2.5V±1.5%, OVIn, -Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABQX	-	MAX6312UK50D2-T	Vdet-IC	5.0V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABQY	-	MAX6312UK50D3-T	Vdet-IC	5.0V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABQZ	-	MAX6312UK50D4-T	Vdet-IC	5.0V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABR	-	AME8800AEEV	LVR-IC	LDO, 3.3V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
ABR	-	AME8800AEEVL	LVR-IC	LDO, 3.3V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
ABR	-	APL5102-33BI	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABR	-	RP107N251D	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABR	ec	XC6114C223MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABR	eh	AME8800AEEVY	LVR-IC	LDO, 3.3V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
ABR	eh	AME8800AEEVZ	LVR-IC	LDO, 3.3V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
ABRA	-	MAX6312UK49D1-T	Vdet-IC	4.9V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABRB	-	MAX6312UK49D2-T	Vdet-IC	4.9V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABRC	-	MAX6312UK49D3-T	Vdet-IC	4.9V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABRD	-	MAX6312UK49D4-T	Vdet-IC	4.9V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABRE	-	MAX6312UK48D1-T	Vdet-IC	4.8V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABRF	-	MAX6312UK48D2-T	Vdet-IC	4.8V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABRG	-	MAX6312UK48D3-T	Vdet-IC	4.8V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABRH	-	MAX6312UK48D4-T	Vdet-IC	4.8V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABRI	-	MAX6312UK47D1-T	Vdet-IC	4.7V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABRJ	-	MAX6312UK47D2-T	Vdet-IC	4.7V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABRK	-	MAX6312UK47D3-T	Vdet-IC	4.7V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABRL	-	MAX6312UK47D4-T	Vdet-IC	4.7V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABRM	-	MAX6312UK46D1-T	Vdet-IC	4.6V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABRN	-	MAX6312UK46D2-T	Vdet-IC	4.6V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABRO	-	MAX6312UK46D3-T	Vdet-IC	4.6V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABRP	-	MAX6312UK46D4-T	Vdet-IC	4.6V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABRQ	-	MAX6312UK45D1-T	Vdet-IC	4.5V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABRR	-	MAX6312UK45D2-T	Vdet-IC	4.5V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABRS	-	MAX6312UK45D3-T	Vdet-IC	4.5V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABRT	-	MAX6312UK45D4-T	Vdet-IC	4.5V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABRU	-	MAX6312UK44D1-T	Vdet-IC	4.4V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABRV	-	MAX6312UK44D2-T	Vdet-IC	4.4V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABRW	-	MAX6312UK44D3-T	Vdet-IC	4.4V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABRX	-	MAX6312UK44D4-T	Vdet-IC	4.4V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABRY	-	MAX6312UK43D1-T	Vdet-IC	4.3V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABRZ	-	MAX6312UK43D2-T	Vdet-IC	4.3V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABS	-	AME8800BEEV	LVR-IC	LDO, 3.0V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
ABS	-	AME8800BEEVL	LVR-IC	LDO, 3.0V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
ABS	-	APL5102-34BI	LVR-IC	LDO, 3.4V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABS	-	RP107N261D	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABS	ec	XC6114C224MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABS	eh	AME8800BEEVY	LVR-IC	LDO, 3.0V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
ABS	eh	AME8800BEEVZ	LVR-IC	LDO, 3.0V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
ABSA	-	MAX6312UK43D3-T	Vdet-IC	4.3V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABSB	-	MAX6312UK43D4-T	Vdet-IC	4.3V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABSC	-	MAX6312UK42D1-T	Vdet-IC	4.2V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABSD	-	MAX6312UK42D2-T	Vdet-IC	4.2V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABSE	-	MAX6312UK42D3-T	Vdet-IC	4.2V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABSF	-	MAX6312UK42D4-T	Vdet-IC	4.2V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABSG	-	MAX6312UK41D1-T	Vdet-IC	4.1V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABSH	-	MAX6312UK41D2-T	Vdet-IC	4.1V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABSI	-	MAX6312UK41D3-T	Vdet-IC	4.1V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABSJ	-	MAX6312UK41D4-T	Vdet-IC	4.1V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABSK	-	MAX6312UK40D1-T	Vdet-IC	4.0V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABSL	-	MAX6312UK40D2-T	Vdet-IC	4.0V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABSM	-	MAX6312UK40D3-T	Vdet-IC	4.0V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABSN	-	MAX6312UK40D4-T	Vdet-IC	4.0V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABSO	-	MAX6312UK39D1-T	Vdet-IC	3.9V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABSP	-	MAX6312UK39D2-T	Vdet-IC	3.9V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABSQ	-	MAX6312UK39D3-T	Vdet-IC	3.9V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABSR	-	MAX6312UK39D4-T	Vdet-IC	3.9V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABSS	-	MAX6312UK38D1-T	Vdet-IC	3.8V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABST	-	MAX6312UK38D2-T	Vdet-IC	3.8V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABSU	-	MAX6312UK38D3-T	Vdet-IC	3.8V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABSV	-	MAX6312UK38D4-T	Vdet-IC	3.8V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABSW	-	MAX6312UK37D1-T	Vdet-IC	3.7V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABSX	-	MAX6312UK37D2-T	Vdet-IC	3.7V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABSY	-	MAX6312UK37D3-T	Vdet-IC	3.7V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABSZ	-	MAX6312UK37D4-T	Vdet-IC	3.7V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABT	-	AME8800CEEV	LVR-IC	LDO, 2.8V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
ABT	-	AME8800CEEVL	LVR-IC	LDO, 2.8V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
ABT	-	APL5102-35BI	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-23-5	28ym	VR1	6k	Anp
ABT	-	RP107N271D	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABT	ec	XC6114C225MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABT	eh	AME8800CEEVY	LVR-IC	LDO, 2.8V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
ABT	eh	AME8800CEEVZ	LVR-IC	LDO, 2.8V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
ABTA	-	MAX6312UK36D1-T	Vdet-IC	3.6V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABTB	-	MAX6312UK36D2-T	Vdet-IC	3.6V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABTC	-	MAX6312UK36D3-T	Vdet-IC	3.6V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABTD	-	MAX6312UK36D4-T	Vdet-IC	3.6V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABTE	-	MAX6312UK35D1-T	Vdet-IC	3.5V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABTF	-	MAX6312UK35D2-T	Vdet-IC	3.5V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABTG	-	MAX6312UK35D3-T	Vdet-IC	3.5V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABTH	-	MAX6312UK35D4-T	Vdet-IC	3.5V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABTI	-	MAX6312UK34D1-T	Vdet-IC	3.4V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABTJ	-	MAX6312UK34D2-T	Vdet-IC	3.4V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABTK	-	MAX6312UK34D3-T	Vdet-IC	3.4V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABTL	-	MAX6312UK34D4-T	Vdet-IC	3.4V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABTM	-	MAX6312UK33D1-T	Vdet-IC	3.3V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABTN	-	MAX6312UK33D2-T	Vdet-IC	3.3V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABTO	-	MAX6312UK33D3-T	Vdet-IC	3.3V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABTP	-	MAX6312UK33D4-T	Vdet-IC	3.3V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABTQ	-	MAX6312UK32D1-T	Vdet-IC	3.2V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABTR	-	MAX6312UK32D2-T	Vdet-IC	3.2V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABTS	-	MAX6312UK32D3-T	Vdet-IC	3.2V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABTT	-	MAX6312UK32D4-T	Vdet-IC	3.2V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABTU	-	MAX6312UK31D1-T	Vdet-IC	3.1V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABTV	-	MAX6312UK31D2-T	Vdet-IC	3.1V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABTW	-	MAX6312UK31D3-T	Vdet-IC	3.1V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABTX	-	MAX6312UK31D4-T	Vdet-IC	3.1V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABTY	-	MAX6312UK30D1-T	Vdet-IC	3.0V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABTZ	-	MAX6312UK30D2-T	Vdet-IC	3.0V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABU	-	AME8800DEEV	LVR-IC	LDO, 2.5V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
ABU	-	RP107N281D	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABU	ec	XC6114C226MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABU	eh	AME8800DEEVL	LVR-IC	LDO, 2.5V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
ABU	eh	AME8800DEEVZ	LVR-IC	LDO, 2.5V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
ABUA	-	MAX6312UK30D3-T	Vdet-IC	3.0V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABUB	-	MAX6312UK30D4-T	Vdet-IC	3.0V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABUC	-	MAX6312UK29D1-T	Vdet-IC	2.9V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABUD	-	MAX6312UK29D2-T	Vdet-IC	2.9V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABUE	-	MAX6312UK29D3-T	Vdet-IC	2.9V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABUF	-	MAX6312UK29D4-T	Vdet-IC	2.9V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABUG	-	MAX6312UK28D1-T	Vdet-IC	2.8V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABUH	-	MAX6312UK28D2-T	Vdet-IC	2.8V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABUI	-	MAX6312UK28D3-T	Vdet-IC	2.8V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABUJ	-	MAX6312UK28D4-T	Vdet-IC	2.8V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABUK	-	MAX6312UK27D1-T	Vdet-IC	2.7V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABUL	-	MAX6312UK27D2-T	Vdet-IC	2.7V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABUM	-	MAX6312UK27D3-T	Vdet-IC	2.7V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABUN	-	MAX6312UK27D4-T	Vdet-IC	2.7V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABUO	-	MAX6312UK26D1-T	Vdet-IC	2.6V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABUP	-	MAX6312UK26D2-T	Vdet-IC	2.6V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABUQ	-	MAX6312UK26D3-T	Vdet-IC	2.6V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABUR	-	MAX6312UK26D4-T	Vdet-IC	2.6V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABUS	-	MAX6312UK25D1-T	Vdet-IC	2.5V±2.5%, -MR, +Reset PPO, 1ms	SOT-23-5	28ek	VD5	6k	Max
ABUT	-	MAX6312UK25D2-T	Vdet-IC	2.5V±2.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28ek	VD5	6k	Max
ABUU	-	MAX6312UK25D3-T	Vdet-IC	2.5V±2.5%, -MR, +Reset PPO, 140ms	SOT-23-5	28ek	VD5	6k	Max
ABUV	-	MAX6312UK25D4-T	Vdet-IC	2.5V±2.5%, -MR, +Reset PPO, 1120ms	SOT-23-5	28ek	VD5	6k	Max
ABUW	-	MAX6313UK50D1-T	Vdet-IC	5.0V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABUX	-	MAX6313UK50D2-T	Vdet-IC	5.0V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABUY	-	MAX6313UK50D3-T	Vdet-IC	5.0V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABUZ	-	MAX6313UK50D4-T	Vdet-IC	5.0V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABV	-	AME8800EEEV	LVR-IC	LDO, 3.8V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
ABV	-	AME8800EEEVL	LVR-IC	LDO, 3.8V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
ABV	-	RP107N291D	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABV	ec	XC6114C227MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABV	eh	AME8800EEEVY	LVR-IC	LDO, 3.8V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
ABV	eh	AME8800EEEVZ	LVR-IC	LDO, 3.8V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
ABVA	-	MAX6313UK49D1-T	Vdet-IC	4.9V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABVB	-	MAX6313UK49D2-T	Vdet-IC	4.9V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABVC	-	MAX6313UK49D3-T	Vdet-IC	4.9V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABVD	-	MAX6313UK49D4-T	Vdet-IC	4.9V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABVE	-	MAX6313UK48D1-T	Vdet-IC	4.8V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABVF	-	MAX6313UK48D2-T	Vdet-IC	4.8V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABVG	-	MAX6313UK48D3-T	Vdet-IC	4.8V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABVH	-	MAX6313UK48D4-T	Vdet-IC	4.8V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABVI	-	MAX6313UK47D1-T	Vdet-IC	4.7V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABVJ	-	MAX6313UK47D2-T	Vdet-IC	4.7V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABVK	-	MAX6313UK47D3-T	Vdet-IC	4.7V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABVL	-	MAX6313UK47D4-T	Vdet-IC	4.7V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABVM	-	MAX6313UK46D1-T	Vdet-IC	4.6V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABVN	-	MAX6313UK46D2-T	Vdet-IC	4.6V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABVO	-	MAX6313UK46D3-T	Vdet-IC	4.6V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABVP	-	MAX6313UK46D4-T	Vdet-IC	4.6V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABVQ	-	MAX6313UK45D1-T	Vdet-IC	4.5V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABVR	-	MAX6313UK45D2-T	Vdet-IC	4.5V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABVS	-	MAX6313UK45D3-T	Vdet-IC	4.5V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABVT	-	MAX6313UK45D4-T	Vdet-IC	4.5V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABVU	-	MAX6313UK44D1-T	Vdet-IC	4.4V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABVV	-	MAX6313UK44D2-T	Vdet-IC	4.4V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABVW	-	MAX6313UK44D3-T	Vdet-IC	4.4V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABVX	-	MAX6313UK44D4-T	Vdet-IC	4.4V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABVY	-	MAX6313UK43D1-T	Vdet-IC	4.3V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABVZ	-	MAX6313UK43D2-T	Vdet-IC	4.3V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABW	-	AME8800FEEV	LVR-IC	LDO, 3.6V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
ABW	-	AME8800FEEVL	LVR-IC	LDO, 3.6V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
ABW	-	RP107N301D	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABW	eh	AME8800FEEVY	LVR-IC	LDO, 3.6V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
ABW	eh	AME8800FEEVZ	LVR-IC	LDO, 3.6V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
ABWA	-	MAX6313UK43D3-T	Vdet-IC	4.3V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABWB	-	MAX6313UK43D4-T	Vdet-IC	4.3V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABWC	-	MAX6313UK42D1-T	Vdet-IC	4.2V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABWD	-	MAX6313UK42D2-T	Vdet-IC	4.2V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABWE	-	MAX6313UK42D3-T	Vdet-IC	4.2V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABWF	-	MAX6313UK42D4-T	Vdet-IC	4.2V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABWG	-	MAX6313UK41D1-T	Vdet-IC	4.1V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABWH	-	MAX6313UK41D2-T	Vdet-IC	4.1V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABWI	-	MAX6313UK41D3-T	Vdet-IC	4.1V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABWJ	-	MAX6313UK41D4-T	Vdet-IC	4.1V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABWK	-	MAX6313UK40D1-T	Vdet-IC	4.0V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABWL	-	MAX6313UK40D2-T	Vdet-IC	4.0V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABWM	-	MAX6313UK40D3-T	Vdet-IC	4.0V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABWN	-	MAX6313UK40D4-T	Vdet-IC	4.0V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABWO	-	MAX6313UK39D1-T	Vdet-IC	3.9V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABWP	-	MAX6313UK39D2-T	Vdet-IC	3.9V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABWQ	-	MAX6313UK39D3-T	Vdet-IC	3.9V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABWR	-	MAX6313UK39D4-T	Vdet-IC	3.9V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABWS	-	MAX6313UK38D1-T	Vdet-IC	3.8V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABWT	-	MAX6313UK38D2-T	Vdet-IC	3.8V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABWU	-	MAX6313UK38D3-T	Vdet-IC	3.8V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABWV	-	MAX6313UK38D4-T	Vdet-IC	3.8V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABWW	-	MAX6313UK37D1-T	Vdet-IC	3.7V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABWX	-	MAX6313UK37D2-T	Vdet-IC	3.7V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABWY	-	MAX6313UK37D3-T	Vdet-IC	3.7V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABWZ	-	MAX6313UK37D4-T	Vdet-IC	3.7V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABX	-	RP107N311D	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABX	ec	XC6114C228MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABXA	-	MAX6313UK36D1-T	Vdet-IC	3.6V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABXB	-	MAX6313UK36D2-T	Vdet-IC	3.6V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABXC	-	MAX6313UK36D3-T	Vdet-IC	3.6V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABXD	-	MAX6313UK36D4-T	Vdet-IC	3.6V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABXE	-	MAX6313UK35D1-T	Vdet-IC	3.5V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABXF	-	MAX6313UK35D2-T	Vdet-IC	3.5V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABXG	-	MAX6313UK35D3-T	Vdet-IC	3.5V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABXH	-	MAX6313UK35D4-T	Vdet-IC	3.5V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABXI	-	MAX6313UK34D1-T	Vdet-IC	3.4V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABXJ	-	MAX6313UK34D2-T	Vdet-IC	3.4V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABXK	-	MAX6313UK34D3-T	Vdet-IC	3.4V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABXL	-	MAX6313UK34D4-T	Vdet-IC	3.4V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABXM	-	MAX6313UK33D1-T	Vdet-IC	3.3V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABXN	-	MAX6313UK33D2-T	Vdet-IC	3.3V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABXO	-	MAX6313UK33D3-T	Vdet-IC	3.3V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABXP	-	MAX6313UK33D4-T	Vdet-IC	3.3V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABXQ	-	MAX6313UK32D1-T	Vdet-IC	3.2V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABXR	-	MAX6313UK32D2-T	Vdet-IC	3.2V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABXS	-	MAX6313UK32D3-T	Vdet-IC	3.2V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABXT	-	MAX6313UK32D4-T	Vdet-IC	3.2V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABXU	-	MAX6313UK31D1-T	Vdet-IC	3.1V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABXV	-	MAX6313UK31D2-T	Vdet-IC	3.1V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABXW	-	MAX6313UK31D3-T	Vdet-IC	3.1V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABXX	-	MAX6313UK31D4-T	Vdet-IC	3.1V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABXY	-	MAX6313UK30D1-T	Vdet-IC	3.0V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABXZ	-	MAX6313UK30D2-T	Vdet-IC	3.0V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABY	-	RP107N321D	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABY	ec	XC6114C229MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABYA	-	MAX6313UK30D3-T	Vdet-IC	3.0V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABYB	-	MAX6313UK30D4-T	Vdet-IC	3.0V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABYC	-	MAX6313UK29D1-T	Vdet-IC	2.9V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABYD	-	MAX6313UK29D2-T	Vdet-IC	2.9V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABYE	-	MAX6313UK29D3-T	Vdet-IC	2.9V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABYF	-	MAX6313UK29D4-T	Vdet-IC	2.9V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABYG	-	MAX6313UK28D1-T	Vdet-IC	2.8V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABYH	-	MAX6313UK28D2-T	Vdet-IC	2.8V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABYI	-	MAX6313UK28D3-T	Vdet-IC	2.8V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABYJ	-	MAX6313UK28D4-T	Vdet-IC	2.8V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABYK	-	MAX6313UK27D1-T	Vdet-IC	2.7V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABYL	-	MAX6313UK27D2-T	Vdet-IC	2.7V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABYM	-	MAX6313UK27D3-T	Vdet-IC	2.7V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABYN	-	MAX6313UK27D4-T	Vdet-IC	2.7V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABYO	-	MAX6313UK26D1-T	Vdet-IC	2.6V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABYP	-	MAX6313UK26D2-T	Vdet-IC	2.6V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABYQ	-	MAX6313UK26D3-T	Vdet-IC	2.6V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABYR	-	MAX6313UK26D4-T	Vdet-IC	2.6V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABYS	-	MAX6313UK25D1-T	Vdet-IC	2.5V±2.5%, OVIn, +Reset PPO, 1ms	SOT-23-5	28em	VD18	6k	Max
ABYT	-	MAX6313UK25D2-T	Vdet-IC	2.5V±2.5%, OVIn, +Reset PPO, 20ms	SOT-23-5	28em	VD18	6k	Max
ABYU	-	MAX6313UK25D3-T	Vdet-IC	2.5V±2.5%, OVIn, +Reset PPO, 140ms	SOT-23-5	28em	VD18	6k	Max
ABYV	-	MAX6313UK25D4-T	Vdet-IC	2.5V±2.5%, OVIn, +Reset PPO, 1120ms	SOT-23-5	28em	VD18	6k	Max
ABZ	-	RP107N331D	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
ABZ	ec	XC6114C230MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ABZD	-	MAX1615UK	LVR-IC	3.3/5.0V±2%, 40mA	SOT-23-5	28	-	6a	Max
ABZE	-	MAX1616UK	LVR-IC	Adj. 1.24..28V±2%, 40mA	SOT-23-5	28	-	6a	Max
ABZF	-	MAX6501UKP035	Tdet-IC	+35°C, -ODO	SOT-23-5	28lc	-	6k	Max
ABZG	-	MAX6502UKP035	Tdet-IC	+35°C, PPO	SOT-23-5	28hf	-	6k	Max
ABZP	-	MAX4012EUK-T	Op-IC	High Speed, 3..12V, 200MHz, 600V/µs	SOT-23-5	28opa	OP1	6k	Max
ABZR	-	MAX6501UKP045	Tdet-IC	+45°C, -ODO	SOT-23-5	28lc	-	6k	Max
ABZS	-	MAX6501UKP065	Tdet-IC	+65°C, -ODO	SOT-23-5	28lc	-	6k	Max
ABZT	-	MAX6501UKP095	Tdet-IC	+95°C, -ODO	SOT-23-5	28lc	-	6k	Max
ABZU	-	MAX6502UKP045	Tdet-IC	+45°C, PPO	SOT-23-5	28hf	-	6k	Max
ABZV	-	MAX6502UKP065	Tdet-IC	+65°C, PPO	SOT-23-5	28hf	-	6k	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABZW	-	MAX6502UKP095	Tdet-IC	+95°C, PPO	SOT-23-5	28hf	-	6k	Max
ABZX	-	MAX6503UKP005	Tdet-IC	+5°C, -ODO	SOT-23-5	28lc	-	6k	Max
ABZY	-	MAX6504UKP005	Tdet-IC	+5°C, PPO	SOT-23-5	28hf	-	6k	Max
Ac	-	BD48E25G	Vdet-IC	2.5V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
AC	-	74AHC1G04GW	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Nxp
AC	-	HD74ALVC1G126VS	CMOS-Log	Bus buffer gate with 3-state output	VSON-5	30	Log13	6a	Ren
AC	-	RN5RT22AA	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
AC	-	SiP823TEU	Vdet-IC	3.08V±1.5%, MR, Strobe, -Reset PPO	SOT-23-5	28cp	VD17	6k	Vs
AC-	-	RT9193-28PU5	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
AC=	-	RT9193-28GU5	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
AC0	-	XC6211C312MR	LVR-IC	LDO, 3.1V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AC0	-	XC6501C311MR-G	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AC0	eb	XC6367A201MR	DC-DC-IC	PWM step-up, 2.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AC0	ej	XC6114C331MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AC0	ek	XC6365A201MR	DC-DC-IC	PWM st-down, 100kHz, 2.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AC01	-	RP171Q122B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC02	-	RP171Q122B5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC03	-	RP171Q132B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC04	-	RP171Q142B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC05	-	RP171Q152B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC06	-	RP171Q162B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC07	-	RP171Q172B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC08	-	RP171Q182B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC09	-	RP171Q182B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC1	-	XC6211C322MR	LVR-IC	LDO, 3.2V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AC1	-	XC6501C321MR-G	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AC1	eb	XC6367A211MR	DC-DC-IC	PWM step-up, 2.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AC1	ej	XC6114C332MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AC1	ek	XC6365A211MR	DC-DC-IC	PWM st-down, 100kHz, 2.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AC10	-	RP171Q192B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC11	-	RP171Q202B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC12	-	RP171Q212B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC13	-	RP171Q222B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC14	-	RP171Q232B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC15	-	RP171Q242B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC16	-	RP171Q252B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC17	-	RP171Q262B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC18	-	AMC8879-1.8DBT	LVR-IC	LDO, 1.8V±1.4%, 150mA, +CE	SOT-23-5	28un	VR7	6a	Adt
AC18	-	RP171Q272B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC19	-	RP171Q282B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC2	-	XC6211C332MR	LVR-IC	LDO, 3.3V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AC2	-	XC6501C331MR-G	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AC2	eb	XC6367A221MR	DC-DC-IC	PWM step-up, 2.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AC2	ej	XC6114C333MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AC2	ek	XC6365A221MR	DC-DC-IC	PWM st-down, 100kHz, 2.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AC20	-	AMC8879-2.0DBT	LVR-IC	LDO, 2.0V±1.4%, 150mA, +CE	SOT-23-5	28un	VR7	6a	Adt
AC20	-	RP171Q282B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC21	-	RP171Q292B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC22	-	RP171Q302B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC23	-	RP171Q312B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC24	-	RP171Q322B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC25	-	AMC8879-2.5DBT	LVR-IC	LDO, 2.5V±1.4%, 150mA, +CE	SOT-23-5	28un	VR7	6a	Adt
AC25	-	RP171Q332B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC26	-	RP171Q342B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC27	-	RP171Q352B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC28	-	AMC8879-2.8DBT	LVR-IC	LDO, 2.8V±1.4%, 150mA, +CE	SOT-23-5	28un	VR7	6a	Adt
AC28	-	RP171Q362B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC29	-	RP171Q372B	LVR-IC	LDO, 3.7V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC2U	-	AMC8879-2.85DBT	LVR-IC	LDO, 2.85V±1.4%, 150mA, +CE	SOT-23-5	28un	VR7	6a	Adt
AC3	-	LD6815TD/12H	LVR-IC	LDO, 1.2V±3%, 150mA, +CE	SOT753	28cx	VR4	6hb	Nxp
AC3	-	XC6211C342MR	LVR-IC	LDO, 3.4V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AC3	-	XC6501C341MR-G	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AC3	eb	XC6367A231MR	DC-DC-IC	PWM step-up, 2.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AC3	ej	XC6114C334MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AC3	ek	XC6365A231MR	DC-DC-IC	PWM st-down, 100kHz, 2.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AC30	-	AMC8879-3.0DBT	LVR-IC	LDO, 3.0V±1.4%, 150mA, +CE	SOT-23-5	28un	VR7	6a	Adt
AC30	-	RP171Q382B	LVR-IC	LDO, 3.8V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC31	-	RP171Q392B	LVR-IC	LDO, 3.9V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC32	-	AMC8879-3.2DBT	LVR-IC	LDO, 3.2V±1.4%, 150mA, +CE	SOT-23-5	28un	VR7	6a	Adt
AC32	-	RP171Q402B	LVR-IC	LDO, 4.0V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AC33	-	AMC8879-3.3DBT	LVR-IC	LDO, 3.3V±1.4%, 150mA, +CE	SOT-23-5	28un	VR7	6a	Adt
AC33	-	RP171Q412B	LVR-IC	LDO, 4.1V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC34	-	RP171Q422B	LVR-IC	LDO, 4.2V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC35	-	RP171Q432B	LVR-IC	LDO, 4.3V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC36	-	RP171Q442B	LVR-IC	LDO, 4.4V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC37	-	RP171Q452B	LVR-IC	LDO, 4.5V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC38	-	RP171Q462B	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC39	-	RP171Q472B	LVR-IC	LDO, 4.7V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC4	-	LD6815TD/15H	LVR-IC	LDO, 1.5V±3%, 150mA, +CE	SOT753	28cx	VR4	6hb	Nxp
AC4	-	XC6211C352MR	LVR-IC	LDO, 3.5V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AC4	-	XC6501C351MR-G	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AC4	eb	XC6367A241MR	DC-DC-IC	PWM step-up, 2.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AC4	ej	XC6114C335MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AC4	ek	XC6365A241MR	DC-DC-IC	PWM st-down, 100kHz, 2.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AC40	-	RP171Q482B	LVR-IC	LDO, 4.8V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC41	-	RP171Q492B	LVR-IC	LDO, 4.9V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC42	-	RP171Q502B	LVR-IC	LDO, 5.0V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC43	-	RP171Q512B	LVR-IC	LDO, 5.1V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC44	-	RP171Q522B	LVR-IC	LDO, 5.2V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC45	-	RP171Q532B	LVR-IC	LDO, 5.3V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC46	-	RP171Q542B	LVR-IC	LDO, 5.4V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC47	-	RP171Q552B	LVR-IC	LDO, 5.5V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC48	-	RP171Q562B	LVR-IC	LDO, 5.6V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC49	-	RP171Q572B	LVR-IC	LDO, 5.7V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC5	-	LD6815TD/18H	LVR-IC	LDO, 1.8V±3%, 150mA, +CE	SOT753	28cx	VR4	6hb	Nxp
AC5	-	XC6211C362MR	LVR-IC	LDO, 3.6V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AC5	-	XC6501C361MR-G	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AC5	eb	XC6367A251MR	DC-DC-IC	PWM step-up, 2.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AC5	ej	XC6114C336MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AC5	ek	XC6365A251MR	DC-DC-IC	PWM st-down, 100kHz, 2.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AC50	-	AMC8879-5.0DBT	LVR-IC	LDO, 5.0V±1.4%, 150mA, +CE	SOT-23-5	28un	VR7	6a	Adt
AC50	-	RP171Q582B	LVR-IC	LDO, 5.8V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC51	-	RP171Q592B	LVR-IC	LDO, 5.9V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC52	-	RP171Q602B	LVR-IC	LDO, 6.0V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AC6	-	LD6815TD/25H	LVR-IC	LDO, 2.5V±3%, 150mA, +CE	SOT753	28cx	VR4	6hb	Nxp
AC6	-	XC6211C372MR	LVR-IC	LDO, 3.7V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AC6	-	XC6501C371MR-G	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AC6	eb	XC6367A261MR	DC-DC-IC	PWM step-up, 2.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AC6	ej	XC6114C337MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AC6	ek	XC6365A261MR	DC-DC-IC	PWM st-down, 100kHz, 2.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AC7	-	LD6815TD/28H	LVR-IC	LDO, 2.8V±3%, 150mA, +CE	SOT753	28cx	VR4	6hb	Nxp
AC7	-	XC6211C382MR	LVR-IC	LDO, 3.8V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AC7	-	XC6501C381MR-G	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AC7	eb	XC6367A271MR	DC-DC-IC	PWM step-up, 2.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AC7	ej	XC6114C338MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AC7	ek	XC6365A271MR	DC-DC-IC	PWM st-down, 100kHz, 2.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AC8	-	LD6815TD/29H	LVR-IC	LDO, 2.9V±3%, 150mA, +CE	SOT753	28cx	VR4	6hb	Nxp
AC8	-	XC6211C392MR	LVR-IC	LDO, 3.9V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AC8	-	XC6501C391MR-G	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AC8	eb	XC6367A281MR	DC-DC-IC	PWM step-up, 2.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AC8	ej	XC6114C339MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AC8	ek	XC6365A281MR	DC-DC-IC	PWM st-down, 100kHz, 2.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AC9	-	LD6815TD/30H	LVR-IC	LDO, 3.0V±3%, 150mA, +CE	SOT753	28cx	VR4	6hb	Nxp
AC9	-	XC6211C402MR	LVR-IC	LDO, 4.0V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AC9	-	XC6501C401MR-G	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AC9	eb	XC6367A291MR	DC-DC-IC	PWM step-up, 2.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AC9	ej	XC6114C340MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AC9	ek	XC6365A291MR	DC-DC-IC	PWM st-down, 100kHz, 2.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ACA	-	XC6211C412MR	LVR-IC	LDO, 4.1V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ACA	-	XC6501C411MR-G	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ACA	eb	XC6367A205MR	DC-DC-IC	PWM step-up, 2.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ACA	ej	XC6114C341MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACA	ek	XC6365A205MR	DC-DC-IC	PWM st-down, 500kHz, 2.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ACAA	-	V6301ASP5B	Vdet-IC	2.0V±2%, -Reset PPO, 290ms	SOT-23-5	28vdr	VD7	6a	Em
ACAB	-	MAX999EUK/GH9-T	Comp-IC	U-High Speed, Vcc=2.7..5.5V, Icco=5mA, <5ns	SOT-23-5	28opa	OP1	6k	Max
ACAB	-	V6301BSP5B	Vdet-IC	2.4V±2%, -Reset PPO, 290ms	SOT-23-5	28vdr	VD7	6a	Em
ACAC	-	V6301CSP5B	Vdet-IC	2.8V±2%, -Reset PPO, 290ms	SOT-23-5	28vdr	VD7	6a	Em
ACAD	-	V6301DSP5B	Vdet-IC	3.5V±2%, -Reset PPO, 290ms	SOT-23-5	28vdr	VD7	6a	Em
ACAE	-	V6301ESP5B	Vdet-IC	4V±2%, -Reset PPO, 290ms	SOT-23-5	28vdr	VD7	6a	Em
ACAF	-	V6301FSP5B	Vdet-IC	4.5V±2%, -Reset PPO, 290ms	SOT-23-5	28vdr	VD7	6a	Em

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ACAG	-	MAX6501UKP115	Tdet-IC	+115°C, -ODO	SOT-23-5	28lc	-	6k	Max
ACAG	-	V6301GSP5B	Vdet-IC	2.0V±2%, +Reset PPO, 290ms	SOT-23-5	28vdo	VD3	6a	Em
ACAH	-	V6301HSP5B	Vdet-IC	2.4V±2%, +Reset PPO, 290ms	SOT-23-5	28vdo	VD3	6a	Em
ACAI	-	V6301ISP5B	Vdet-IC	2.8V±2%, +Reset PPO, 290ms	SOT-23-5	28vdo	VD3	6a	Em
ACAJ	-	V6301JSP5B	Vdet-IC	3.5V±2%, +Reset PPO, 290ms	SOT-23-5	28vdo	VD3	6a	Em
ACAK	-	V6301KSP5B	Vdet-IC	4V±2%, +Reset PPO, 290ms	SOT-23-5	28vdo	VD3	6a	Em
ACAL	-	V6301LSP5B	Vdet-IC	4.5V±2%, +Reset PPO, 290ms	SOT-23-5	28vdo	VD3	6a	Em
ACAM	-	MAX6503UKP015	Tdet-IC	+15°C, ODO	SOT-23-5	28lc	-	6k	Max
ACAM	-	V6301MSP5B	Vdet-IC	2.0V±2%, -Reset ODO, 290ms	SOT-23-5	28vdr	VD6	6a	Em
ACAN	-	MAX6503UKN005	Tdet-IC	-5°C, -ODO	SOT-23-5	28lc	-	6k	Max
ACAN	-	V6301NSP5B	Vdet-IC	2.4V±2%, -Reset ODO, 290ms	SOT-23-5	28vdr	VD6	6a	Em
ACAO	-	V6301OSP5B	Vdet-IC	2.8V±2%, -Reset ODO, 290ms	SOT-23-5	28vdr	VD6	6a	Em
ACAP	-	MAX6503UKN025	Tdet-IC	-25°C, -ODO	SOT-23-5	28lc	-	6k	Max
ACAP	-	V6301PSP5B	Vdet-IC	3.5V±2%, -Reset ODO, 290ms	SOT-23-5	28vdr	VD6	6a	Em
ACAQ	-	MAX6503UKN035	Tdet-IC	-35°C, -ODO	SOT-23-5	28lc	-	6k	Max
ACAQ	-	V6301QSP5B	Vdet-IC	4V±2%, -Reset ODO, 290ms	SOT-23-5	28vdr	VD6	6a	Em
ACAR	-	V6301RSP5B	Vdet-IC	4.5V±2%, -Reset ODO, 290ms	SOT-23-5	28vdr	VD6	6a	Em
ACAT	-	MAX6504UKN005	Tdet-IC	-5°C, PPO	SOT-23-5	28hf	-	6k	Max
ACAV	-	MAX6504UKN025	Tdet-IC	-25°C, PPO	SOT-23-5	28hf	-	6k	Max
ACAW	-	MAX6504UKN035	Tdet-IC	-35°C, PPO	SOT-23-5	28hf	-	6k	Max
ACAX	-	MAX6504UKN045	Tdet-IC	-45°C, PPO	SOT-23-5	28hf	-	6k	Max
ACAY	-	MAX8867EUK25-T	LVR-IC	LDO, 2.5V±1.4%, 150mA, +CE	SOT-23-5	28sp	VR7	6a	Max
ACAZ	-	MAX8867EUK28-T	LVR-IC	LDO, 2.8V±1.4%, 150mA, +CE	SOT-23-5	28sp	VR7	6a	Max
ACB	-	XC6211C422MR	LVR-IC	LDO, 4.2V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ACB	-	XC6501C421MR-G	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ACB	eb	XC6367A215MR	DC-DC-IC	PWM step-up, 2.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ACB	ej	XC6114C342MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACB	ek	XC6365A215MR	DC-DC-IC	PWM st-down, 500kHz, 2.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ACBA	-	MAX8867EUK29-T	LVR-IC	LDO, 2.84V±1.4%, 150mA, +CE	SOT-23-5	28sp	VR7	6a	Max
ACBB	-	MAX8867EUK30-T	LVR-IC	LDO, 3.0V±1.4%, 150mA, +CE	SOT-23-5	28sp	VR7	6a	Max
ACBC	-	MAX8867EUK32-T	LVR-IC	LDO, 3.15V±1.4%, 150mA, +CE	SOT-23-5	28sp	VR7	6a	Max
ACBD	-	MAX8867EUK33-T	LVR-IC	LDO, 3.3V±1.4%, 150mA, +CE	SOT-23-5	28sp	VR7	6a	Max
ACBE	-	MAX8867EUK50-T	LVR-IC	LDO, 5.0V±1.4%, 150mA, +CE	SOT-23-5	28sp	VR7	6a	Max
ACBF	-	MAX8868EUK25-T	LVR-IC	LDO, 2.5V±1.4%, 150mA, +CE, CL	SOT-23-5	28sp	VR7	6a	Max
ACBG	-	MAX8868EUK28-T	LVR-IC	LDO, 2.8V±1.4%, 150mA, +CE, CL	SOT-23-5	28sp	VR7	6a	Max
ACBH	-	MAX8868EUK29-T	LVR-IC	LDO, 2.84V±1.4%, 150mA, +CE, CL	SOT-23-5	28sp	VR7	6a	Max
ACBI	-	MAX8868EUK30-T	LVR-IC	LDO, 3.0V±1.4%, 150mA, +CE, CL	SOT-23-5	28sp	VR7	6a	Max
ACBJ	-	MAX8868EUK32-T	LVR-IC	LDO, 3.15V±1.4%, 150mA, +CE, CL	SOT-23-5	28sp	VR7	6a	Max
ACBK	-	MAX8868EUK33-T	LVR-IC	LDO, 3.3V±1.4%, 150mA, +CE, CL	SOT-23-5	28sp	VR7	6a	Max
ACBL	-	MAX8868EUK50-T	LVR-IC	LDO, 5.0V±1.4%, 150mA, +CE, CL	SOT-23-5	28sp	VR7	6a	Max
ACBM	-	MAX8877EUK25-T	LVR-IC	LDO, 2.5V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6k	Max
ACBN	-	MAX8877EUK28-T	LVR-IC	LDO, 2.8V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6k	Max
ACBO	-	MAX8877EUK29-T	LVR-IC	LDO, 2.84V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6k	Max
ACBP	-	MAX8877EUK30-T	LVR-IC	LDO, 3.0V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6k	Max
ACBQ	-	MAX8877EUK32-T	LVR-IC	LDO, 3.15V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6k	Max
ACBR	-	MAX8877EUK33-T	LVR-IC	LDO, 3.3V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6k	Max
ACBS	-	MAX8877EUK50-T	LVR-IC	LDO, 5.0V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6k	Max
ACBT	-	MAX8878EUK25-T	LVR-IC	LDO, 2.5V±1.4%, 150mA, +CE, CL	SOT-23-5	28vrx	VR7	6k	Max
ACBU	-	MAX8878EUK28-T	LVR-IC	LDO, 2.8V±1.4%, 150mA, +CE, CL	SOT-23-5	28vrx	VR7	6k	Max
ACBV	-	MAX8878EUK29-T	LVR-IC	LDO, 2.84V±1.4%, 150mA, +CE, CL	SOT-23-5	28vrx	VR7	6k	Max
ACBW	-	MAX8878EUK30-T	LVR-IC	LDO, 3.0V±1.4%, 150mA, +CE, CL	SOT-23-5	28vrx	VR7	6k	Max
ACBX	-	MAX8878EUK32-T	LVR-IC	LDO, 3.15V±1.4%, 150mA, +CE, CL	SOT-23-5	28vrx	VR7	6k	Max
ACBY	-	MAX8878EUK33-T	LVR-IC	LDO, 3.3V±1.4%, 150mA, +CE, CL	SOT-23-5	28vrx	VR7	6k	Max
ACBZ	-	MAX8878EUK50-T	LVR-IC	LDO, 5.0V±1.4%, 150mA, +CE, CL	SOT-23-5	28vrx	VR7	6k	Max
ACC	-	XC6211C432MR	LVR-IC	LDO, 4.3V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ACC	-	XC6501C431MR-G	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ACC	eb	XC6367A225MR	DC-DC-IC	PWM step-up, 2.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ACC	ej	XC6114C343MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACC	ek	XC6365A225MR	DC-DC-IC	PWM st-down, 500kHz, 2.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ACCO	-	MAX4104EUK-T	Op-IC	LN, ±3.5..±5.5V, Icco=20mA, 400V/µs(625MHz)	SOT-23-5	28opa	OP1	6k	Max
ACCP	-	MAX4105EUK-T	Op-IC	LN, ±3.5..±5.5V, Icco=20mA, 1400V/µs(410MHz)	SOT-23-5	28opa	OP1	6k	Max
ACCQ	-	MAX4304EUK-T	Op-IC	LN, ±3.5..±5.5V, Icco=20mA, 1000V/µs(730MHz)	SOT-23-5	28opa	OP1	6k	Max
ACCR	-	MAX4305EUK-T	Op-IC	LN, ±3.5..±5.5V, Icco=20mA, 1400V/µs(340MHz)	SOT-23-5	28opa	OP1	6k	Max
ACCZ	-	MAX8867EUK36-T	LVR-IC	LDO, 3.6V±1.4%, 150mA, +CE	SOT-23-5	28sp	VR7	6a	Max
ACD	-	XC6211C442MR	LVR-IC	LDO, 4.4V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ACD	-	XC6501C441MR-G	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ACD	eb	XC6367A235MR	DC-DC-IC	PWM step-up, 2.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ACD	ej	XC6114C344MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACD	ek	XC6365A235MR	DC-DC-IC	PWM st-down, 500kHz, 2.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ACDA	-	MAX8868EUK36-T	LVR-IC	LDO, 3.6V±1.4%, 150mA, +CE, CL	SOT-23-5	28sp	VR7	6a	Max





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ACDB	-	MAX8877EUK36-T	LVR-IC	LDO, 3.6V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6k	Max
ACDC	-	MAX8878EUK36-T	LVR-IC	LDO, 3.6V±1.4%, 150mA, +CE, CL	SOT-23-5	28vrx	VR7	6k	Max
ACDP	-	MAX6501UKP085	Tdet-IC	+85°C, -ODO	SOT-23-5	28lc	-	6k	Max
ACDS	-	MAX4174ABUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=0.25V/V	SOT-23-5	28opa	OP1	6k	Max
ACDT	-	MAX4174ACUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=0.5V/V	SOT-23-5	28opa	OP1	6k	Max
ACDU	-	MAX4174ADUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=1V/V	SOT-23-5	28opa	OP1	6k	Max
ACDV	-	MAX4174AEUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=1.25V/V	SOT-23-5	28opa	OP1	6k	Max
ACDW	-	MAX4174AFUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=1.5V/V	SOT-23-5	28opa	OP1	6k	Max
ACDX	-	MAX4174AGUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=2V/V	SOT-23-5	28opa	OP1	6k	Max
ACDY	-	MAX4174AHUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=2.5V/V	SOT-23-5	28opa	OP1	6k	Max
ACDZ	-	MAX4174AJUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=3V/V	SOT-23-5	28opa	OP1	6k	Max
ACE	-	AME8800GEEV	LVR-IC	LDO, 3.5V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
ACE	-	AME8800GEEVL	LVR-IC	LDO, 3.5V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
ACE	-	XC6211C452MR	LVR-IC	LDO, 4.5V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ACE	-	XC6501C451MR-G	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ACE	eb	XC6367A245MR	DC-DC-IC	PWM step-up, 2.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ACE	eh	AME8800GEEVY	LVR-IC	LDO, 3.5V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
ACE	eh	AME8800GEEVZ	LVR-IC	LDO, 3.5V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
ACE	ej	XC6114C345MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACE	ek	XC6365A245MR	DC-DC-IC	PWM st-down, 500kHz, 2.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ACEA	-	MAX4174AKUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=4V/V	SOT-23-5	28opa	OP1	6k	Max
ACEB	-	MAX4174ALUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=5V/V	SOT-23-5	28opa	OP1	6k	Max
ACEC	-	MAX4174AMUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=6V/V	SOT-23-5	28opa	OP1	6k	Max
ACED	-	MAX4174ANUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=8V/V	SOT-23-5	28opa	OP1	6k	Max
ACEE	-	MAX4174AOUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=9V/V	SOT-23-5	28opa	OP1	6k	Max
ACEF	-	MAX4174BAUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=10V/V	SOT-23-5	28opa	OP1	6k	Max
ACEG	-	MAX4174BBUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=12.5V/V	SOT-23-5	28opa	OP1	6k	Max
ACEH	-	MAX4174BCUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=15V/V	SOT-23-5	28opa	OP1	6k	Max
ACEI	-	MAX4174BDUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=20V/V	SOT-23-5	28opa	OP1	6k	Max
ACEJ	-	MAX4174BEUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=24V/V	SOT-23-5	28opa	OP1	6k	Max
ACEK	-	MAX4174BFUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=25V/V	SOT-23-5	28opa	OP1	6k	Max
ACEL	-	MAX4174BGUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=30V/V	SOT-23-5	28opa	OP1	6k	Max
ACEM	-	MAX4174BHUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=40V/V	SOT-23-5	28opa	OP1	6k	Max
ACEN	-	MAX4174BJUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=49V/V	SOT-23-5	28opa	OP1	6k	Max
ACEO	-	MAX4174BKUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=50V/V	SOT-23-5	28opa	OP1	6k	Max
ACEP	-	MAX4174BLUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=60V/V	SOT-23-5	28opa	OP1	6k	Max
ACEQ	-	MAX4174BMUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=80V/V	SOT-23-5	28opa	OP1	6k	Max
ACER	-	MAX4174BNUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=99V/V	SOT-23-5	28opa	OP1	6k	Max
ACES	-	MAX4174CAUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=100V/V	SOT-23-5	28opa	OP1	6k	Max
ACET	-	MAX4175ABUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=0.25V/V	SOT-23-5	28opa	OP1	6k	Max
ACEU	-	MAX4175ACUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=0.5V/V	SOT-23-5	28opa	OP1	6k	Max
ACEV	-	MAX4175ADUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=1V/V	SOT-23-5	28opa	OP1	6k	Max
ACEW	-	MAX4175AEUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=1.25V/V	SOT-23-5	28opa	OP1	6k	Max
ACEX	-	MAX4175AFUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=1.5V/V	SOT-23-5	28opa	OP1	6k	Max
ACEY	-	MAX4175AGUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=2V/V	SOT-23-5	28opa	OP1	6k	Max
ACEZ	-	MAX4175AHUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=2.5V/V	SOT-23-5	28opa	OP1	6k	Max
ACF	-	XC6211C462MR	LVR-IC	LDO, 4.6V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ACF	-	XC6501C461MR-G	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ACF	eb	XC6367A255MR	DC-DC-IC	PWM step-up, 2.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ACF	ec	XC6114C316MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACF	ej	XC6114C346MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACF	ek	XC6365A255MR	DC-DC-IC	PWM st-down, 500kHz, 2.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ACFA	-	MAX4175AJUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=3V/V	SOT-23-5	28opa	OP1	6k	Max
ACFB	-	MAX4175AKUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=4V/V	SOT-23-5	28opa	OP1	6k	Max
ACFC	-	MAX4175ALUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=5V/V	SOT-23-5	28opa	OP1	6k	Max
ACFD	-	MAX4175AMUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=6V/V	SOT-23-5	28opa	OP1	6k	Max
ACFE	-	MAX4175ANUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=8V/V	SOT-23-5	28opa	OP1	6k	Max
ACFF	-	MAX4175AOUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=9V/V	SOT-23-5	28opa	OP1	6k	Max
ACFG	-	MAX4175BAUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=10V/V	SOT-23-5	28opa	OP1	6k	Max
ACFH	-	MAX4175BBUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=12.5V/V	SOT-23-5	28opa	OP1	6k	Max
ACFI	-	MAX4175BCUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=15V/V	SOT-23-5	28opa	OP1	6k	Max
ACFJ	-	MAX4175BDUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=20V/V	SOT-23-5	28opa	OP1	6k	Max
ACFK	-	MAX4175BEUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=24V/V	SOT-23-5	28opa	OP1	6k	Max
ACFL	-	MAX4175BFUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=25V/V	SOT-23-5	28opa	OP1	6k	Max
ACFM	-	MAX4175BGUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=30V/V	SOT-23-5	28opa	OP1	6k	Max
ACFN	-	MAX4175BHUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=40V/V	SOT-23-5	28opa	OP1	6k	Max
ACFO	-	MAX4175BJUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=49V/V	SOT-23-5	28opa	OP1	6k	Max
ACFP	-	MAX4175BKUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=50V/V	SOT-23-5	28opa	OP1	6k	Max
ACFQ	-	MAX4175BLUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=60V/V	SOT-23-5	28opa	OP1	6k	Max
ACFR	-	MAX4175BMUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=80V/V	SOT-23-5	28opa	OP1	6k	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ACFS	-	MAX4175BNUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=99V/V	SOT-23-5	28opa	OP1	6k	Max
ACFT	-	MAX4175CAUK	Op-IC	Fixed-gain, Vcc=2.5..5.2V, 0.7V/µs, Vg=100V/V	SOT-23-5	28opa	OP1	6k	Max
ACFU	-	MAX6501UKP105	Tdet-IC	+105°C, -ODO	SOT-23-5	28lc	-	6k	Max
ACFV	-	MAX6501UKP075	Tdet-IC	+75°C, -ODO	SOT-23-5	28lc	-	6k	Max
ACFW	-	MAX6501UKP055	Tdet-IC	+55°C, -ODO	SOT-23-5	28lc	-	6k	Max
ACFX	-	MAX6503UKN015	Tdet-IC	-15°C, -ODO	SOT-23-5	28lc	-	6k	Max
ACFY	-	MAX6502UKP115	Tdet-IC	+115°C, PPO	SOT-23-5	28lc	-	6k	Max
ACFZ	-	MAX6502UKP105	Tdet-IC	+105°C, PPO	SOT-23-5	28lc	-	6k	Max
ACG	-	NCV301LSN33T1	Vdet-IC	3.3V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
ACGA	-	MAX6502UKP085	Tdet-IC	+85°C, PPO	SOT-23-5	28hf	-	6k	Max
ACGB	-	MAX6502UKP075	Tdet-IC	+75°C, PPO	SOT-23-5	28hf	-	6k	Max
ACGC	-	MAX6502UKP055	Tdet-IC	+55°C, PPO	SOT-23-5	28hf	-	6k	Max
ACGD	-	MAX6504UKN015	Tdet-IC	-15°C, PPO	SOT-23-5	28hf	-	6k	Max
ACGF	-	MAX4040EUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco=10µA, Vg=94dB	SOT-23-5	28opa	OP1	6k	Max
ACGO	-	MAX6501UKP125	Tdet-IC	+125°C, -ODO	SOT-23-5	28lc	-	6k	Max
ACH	-	XC6211C472MR	LVR-IC	LDO, 4.7V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ACH	-	XC6501C471MR-G	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ACH	eb	XC6367A265MR	DC-DC-IC	PWM step-up, 2.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ACH	ec	XC6114C317MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACH	ej	XC6114C347MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACH	ek	XC6365A265MR	DC-DC-IC	PWM st-down, 500kHz, 2.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ACHF	-	MAX8867EUK27-T	LVR-IC	LDO, 2.7V±1.4%, 150mA, +CE	SOT-23-5	28sp	VR7	6a	Max
ACJ	-	NCV302LSN30T1	Vdet-IC	3.0V±1.5%, -Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
ACK	-	XC6211C482MR	LVR-IC	LDO, 4.8V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ACK	-	XC6501C481MR-G	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ACK	eb	XC6367A275MR	DC-DC-IC	PWM step-up, 2.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ACK	ec	XC6114C318MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACK	ej	XC6114C348MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACK	ek	XC6365A275MR	DC-DC-IC	PWM st-down, 500kHz, 2.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ACL	-	XC6211C492MR	LVR-IC	LDO, 4.9V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ACL	-	XC6501C491MR-G	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ACL	eb	XC6367A285MR	DC-DC-IC	PWM step-up, 2.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ACL	ec	XC6114C319MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACL	ej	XC6114C349MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACL	ek	XC6365A285MR	DC-DC-IC	PWM st-down, 500kHz, 2.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ACM	-	XC6211C502MR	LVR-IC	LDO, 5.0V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ACM	-	XC6501C501MR-G	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ACM	eb	XC6367A295MR	DC-DC-IC	PWM step-up, 2.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ACM	ec	XC6114C320MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACM	ej	XC6114C350MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACM	ek	XC6365A295MR	DC-DC-IC	PWM st-down, 500kHz, 2.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ACN	ec	XC6114C321MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACP	ec	XC6114C322MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACR	-	NCV301LSN42T1	Vdet-IC	4.2V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
ACR	ec	XC6114C323MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACS	ec	XC6114C324MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACT	ec	XC6114C325MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACU	ec	XC6114C326MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACV	ec	XC6114C327MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACX	ec	XC6114C328MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACY	ec	XC6114C329MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ACZ	ec	XC6114C330MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
Ad	-	BD48E26G	Vdet-IC	2.6V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
AD	-	74AHC1GU04GW	CMOS-Log	Inverter	SC-88A	28	Log6	6a	Nxp
AD	-	HD74ALVC1G06VS	CMOS-Log	Inverter (ODO)	VSON-5	30	Log19	6a	Ren
AD	-	PI74ST1G32CX	CMOS-Log	2-input OR gate	SC-70-5	28	Log4	6a	Per
AD	-	PI74ST1G32TX	CMOS-Log	2-input OR gate	SOT-23-5	28	Log4	6a	Per
AD	-	RN5RT23AA	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
AD	-	SiP823SEU	Vdet-IC	2.93V±1.5%, MR, Strobe, -Reset PPO	SOT-23-5	28cp	VD17	6k	Vs
AD	-	XP01110	Si-pnp-Digi	Dual, 50V, 100mA, 150mW, 80MHz, R1=47k	SMini5	30/TD9	TD9	6a	Pan
AD	-	XP1110	Si-pnp-Digi	Dual, 50V, 100mA, 150mW, 80MHz, R1=47k	SMini5	30/TD9	TD9	6a	Pan
AD-	-	RT9193-30PU5	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
AD0	-	XC6211D312MR	LVR-IC	LDO, 3.1V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AD0	-	XC6501D311MR-G	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AD0	eb	XC6367A301MR	DC-DC-IC	PWM step-up, 3.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AD0	ej	XC6114C431MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AD0	ek	XC6365A301MR	DC-DC-IC	PWM st-down, 100kHz, 3.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AD01	-	RP171Q122D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD02	-	RP171Q122D5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD03	-	RP171Q132D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AD04	-	RP171Q142D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD05	-	RP171Q152D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD06	-	RP171Q162D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD07	-	RP171Q172D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD08	-	RP171Q182D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD09	-	RP171Q182D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD1	-	LD6815TD/33H	LVR-IC	LDO, 3.3V±3%, 150mA, +CE	SOT753	28cx	VR4	6hb	Nxp
AD1	-	XC6211D322MR	LVR-IC	LDO, 3.2V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AD1	-	XC6501D321MR-G	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AD1	eb	XC6367A311MR	DC-DC-IC	PWM step-up, 3.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AD1	ej	XC6114C432MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AD1	ek	XC6365A311MR	DC-DC-IC	PWM st-down, 100kHz, 3.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AD10	-	RP171Q192D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD11	-	RP171Q202D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD12	-	RP171Q212D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD13	-	RP171Q222D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD14	-	RP171Q232D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD15	-	RP171Q242D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD16	-	RP171Q252D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD17	-	RP171Q262D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD18	-	RP171Q272D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD19	-	RP171Q282D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD2	-	LD6815TD/36H	LVR-IC	LDO, 3.6V±3%, 150mA, +CE	SOT753	28cx	VR4	6hb	Nxp
AD2	-	XC6211D332MR	LVR-IC	LDO, 3.3V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AD2	-	XC6501D331MR-G	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AD2	eb	XC6367A321MR	DC-DC-IC	PWM step-up, 3.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AD2	ej	XC6114C433MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AD2	ek	XC6365A321MR	DC-DC-IC	PWM st-down, 100kHz, 3.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AD20	-	RP171Q282D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD21	-	RP171Q292D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD22	-	RP171Q302D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD23	-	RP171Q312D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD24	-	RP171Q322D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD25	-	RP171Q332D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD26	-	RP171Q342D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD27	-	RP171Q352D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD28	-	RP171Q362D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD29	-	RP171Q372D	LVR-IC	LDO, 3.7V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD3	-	LD6815TD/12P	LVR-IC	LDO, 1.2V±3%, 150mA, +CE, auto-discharge	SOT753	28cx	VR4	6hb	Nxp
AD3	-	XC6211D342MR	LVR-IC	LDO, 3.4V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AD3	-	XC6501D341MR-G	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AD3	eb	XC6367A331MR	DC-DC-IC	PWM step-up, 3.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AD3	ej	XC6114C434MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AD3	ek	XC6365A331MR	DC-DC-IC	PWM st-down, 100kHz, 3.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AD30	-	RP171Q382D	LVR-IC	LDO, 3.8V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD31	-	RP171Q392D	LVR-IC	LDO, 3.9V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD32	-	RP171Q402D	LVR-IC	LDO, 4.0V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD33	-	RP171Q412D	LVR-IC	LDO, 4.1V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD34	-	RP171Q422D	LVR-IC	LDO, 4.2V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD35	-	RP171Q432D	LVR-IC	LDO, 4.3V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD36	-	RP171Q442D	LVR-IC	LDO, 4.4V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD37	-	RP171Q452D	LVR-IC	LDO, 4.5V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD38	-	RP171Q462D	LVR-IC	LDO, 4.6V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD39	-	RP171Q472D	LVR-IC	LDO, 4.7V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD4	-	LD6815TD/15P	LVR-IC	LDO, 1.5V±3%, 150mA, +CE, auto-discharge	SOT753	28cx	VR4	6hb	Nxp
AD4	-	XC6211D352MR	LVR-IC	LDO, 3.5V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AD4	-	XC6501D351MR-G	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AD4	eb	XC6367A341MR	DC-DC-IC	PWM step-up, 3.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AD4	ej	XC6114C435MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AD4	ek	XC6365A341MR	DC-DC-IC	PWM st-down, 100kHz, 3.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AD40	-	RP171Q482D	LVR-IC	LDO, 4.8V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD41	-	RP171Q492D	LVR-IC	LDO, 4.9V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD42	-	RP171Q502D	LVR-IC	LDO, 5.0V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD43	-	RP171Q512D	LVR-IC	LDO, 5.1V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD44	-	RP171Q522D	LVR-IC	LDO, 5.2V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD45	-	RP171Q532D	LVR-IC	LDO, 5.3V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD46	-	RP171Q542D	LVR-IC	LDO, 5.4V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD47	-	RP171Q552D	LVR-IC	LDO, 5.5V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD48	-	RP171Q562D	LVR-IC	LDO, 5.6V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD49	-	RP171Q572D	LVR-IC	LDO, 5.7V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AD5	-	LD6815TD/18P	LVR-IC	LDO, 1.8V±3%, 150mA, +CE, auto-discharge	SOT753	28cx	VR4	6hb	Nxp
AD5	-	XC6211D362MR	LVR-IC	LDO, 3.6V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AD5	-	XC6501D361MR-G	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AD5	eb	XC6367A351MR	DC-DC-IC	PWM step-up, 3.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AD5	ej	XC6114C436MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AD5	ek	XC6365A351MR	DC-DC-IC	PWM st-down, 100kHz, 3.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AD50	-	RP171Q582D	LVR-IC	LDO, 5.8V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD51	-	RP171Q592D	LVR-IC	LDO, 5.9V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD52	-	RP171Q602D	LVR-IC	LDO, 6.0V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AD6	-	LD6815TD/25P	LVR-IC	LDO, 2.5V±3%, 150mA, +CE, auto-discharge	SOT753	28cx	VR4	6hb	Nxp
AD6	-	XC6211D372MR	LVR-IC	LDO, 3.7V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AD6	-	XC6501D371MR-G	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AD6	eb	XC6367A361MR	DC-DC-IC	PWM step-up, 3.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AD6	ej	XC6114C437MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AD6	ek	XC6365A361MR	DC-DC-IC	PWM st-down, 100kHz, 3.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AD7	-	LD6815TD/28P	LVR-IC	LDO, 2.8V±3%, 150mA, +CE, auto-discharge	SOT753	28cx	VR4	6hb	Nxp
AD7	-	XC6211D382MR	LVR-IC	LDO, 3.8V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AD7	-	XC6501D381MR-G	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AD7	eb	XC6367A371MR	DC-DC-IC	PWM step-up, 3.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AD7	ej	XC6114C438MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AD7	ek	XC6365A371MR	DC-DC-IC	PWM st-down, 100kHz, 3.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AD8	-	LD6815TD/29P	LVR-IC	LDO, 2.9V±3%, 150mA, +CE, auto-discharge	SOT753	28cx	VR4	6hb	Nxp
AD8	-	XC6211D392MR	LVR-IC	LDO, 3.9V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AD8	-	XC6501D391MR-G	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AD8	eb	XC6367A381MR	DC-DC-IC	PWM step-up, 3.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AD8	ej	XC6114C439MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AD8	ek	XC6365A381MR	DC-DC-IC	PWM st-down, 100kHz, 3.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AD9	-	LD6815TD/30P	LVR-IC	LDO, 3.0V±3%, 150mA, +CE, auto-discharge	SOT753	28cx	VR4	6hb	Nxp
AD9	-	XC6211D402MR	LVR-IC	LDO, 4.0V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AD9	-	XC6501D401MR-G	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AD9	eb	XC6367A391MR	DC-DC-IC	PWM step-up, 3.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AD9	ej	XC6114C440MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AD9	ek	XC6365A391MR	DC-DC-IC	PWM st-down, 100kHz, 3.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ADA	-	XC6211D412MR	LVR-IC	LDO, 4.1V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
ADA	-	XC6501D411MR-G	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ADA	eb	XC6367A305MR	DC-DC-IC	PWM step-up, 3.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ADA	ej	XC6114C441MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADA	ek	XC6365A305MR	DC-DC-IC	PWM st-down, 500kHz, 3.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ADAA	-	V6310ASP5B	Vdet-IC	2.0V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6a	Em
ADAB	-	V6310BSP5B	Vdet-IC	2.4V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6a	Em
ADAC	-	V6310CSP5B	Vdet-IC	2.8V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6a	Em
ADAD	-	V6310DSP5B	Vdet-IC	3.5V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6a	Em
ADAE	-	V6310ESP5B	Vdet-IC	4V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6a	Em
ADAF	-	V6310FSP5B	Vdet-IC	4.5V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6a	Em
ADAG	-	V6310GSP5B	Vdet-IC	2.0V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6a	Em
ADAH	-	V6310HSP5B	Vdet-IC	2.4V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6a	Em
ADAI	-	V6310ISP5B	Vdet-IC	2.8V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6a	Em
ADAJ	-	V6310JSP5B	Vdet-IC	3.5V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6a	Em
ADAK	-	V6310KSP5B	Vdet-IC	4V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6a	Em
ADAL	-	V6310LSP5B	Vdet-IC	4.5V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6a	Em
ADAM	-	V6310MSP5B	Vdet-IC	2.0V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6a	Em
ADAN	-	V6310NSP5B	Vdet-IC	2.4V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6a	Em
ADAO	-	V6310OSP5B	Vdet-IC	2.8V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6a	Em
ADAP	-	V6310PSP5B	Vdet-IC	3.5V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6a	Em
ADAQ	-	V6310QSP5B	Vdet-IC	4V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6a	Em
ADAR	-	V6310RSP5B	Vdet-IC	4.5V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6a	Em
ADB	-	XC6211D422MR	LVR-IC	LDO, 4.2V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
ADB	-	XC6501D421MR-G	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ADB	eb	XC6367A315MR	DC-DC-IC	PWM step-up, 3.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ADB	ej	XC6114C442MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADB	ek	XC6365A315MR	DC-DC-IC	PWM st-down, 500kHz, 3.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ADC	-	NCV303LSN11T1	Vdet-IC	1.1V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
ADC	-	XC6211D432MR	LVR-IC	LDO, 4.3V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
ADC	-	XC6501D431MR-G	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ADC	eb	XC6367A325MR	DC-DC-IC	PWM step-up, 3.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ADC	ej	XC6114C443MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADC	ek	XC6365A325MR	DC-DC-IC	PWM st-down, 500kHz, 3.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ADD	-	NCV303LSN22T1	Vdet-IC	2.2V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
ADD	-	XC6211D442MR	LVR-IC	LDO, 4.4V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
ADD	-	XC6501D441MR-G	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ADD	eb	XC6367A335MR	DC-DC-IC	PWM step-up, 3.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ADD	ej	XC6114C444MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADD	ek	XC6365A335MR	DC-DC-IC	PWM st-down, 500kHz, 3.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ADE	-	XC6211D452MR	LVR-IC	LDO, 4.5V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
ADE	-	XC6501D451MR-G	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ADE	eb	XC6367A345MR	DC-DC-IC	PWM step-up, 3.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ADE	ej	XC6114C445MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADE	ek	XC6365A345MR	DC-DC-IC	PWM st-down, 500kHz, 3.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ADF	-	XC6211D462MR	LVR-IC	LDO, 4.6V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
ADF	-	XC6501D461MR-G	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ADF	eb	XC6367A355MR	DC-DC-IC	PWM step-up, 3.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ADF	ec	XC6114C416MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADF	ej	XC6114C446MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADF	ek	XC6365A355MR	DC-DC-IC	PWM st-down, 500kHz, 3.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ADH	-	XC6211D472MR	LVR-IC	LDO, 4.7V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
ADH	-	XC6501D471MR-G	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ADH	eb	XC6367A365MR	DC-DC-IC	PWM step-up, 3.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ADH	ec	XC6114C417MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADH	ej	XC6114C447MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADH	ek	XC6365A365MR	DC-DC-IC	PWM st-down, 500kHz, 3.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ADIZ	-	MAX6503UKN045	Tdet-IC	-45°C, -ODO	SOT-23-5	28lc	-	6k	Max
ADJA	-	MAX4076AAUK	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=117dB	SOT-23-5	28opa	OP1	6k	Max
ADJB	-	MAX4074ABUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=0.25V/V	SOT-23-5	28opa	OP1	6k	Max
ADJC	-	MAX4074ACUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=0.5V/V	SOT-23-5	28opa	OP1	6k	Max
ADJD	-	MAX4074ADUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=1V/V	SOT-23-5	28opa	OP1	6k	Max
ADJE	-	MAX4074AEUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=1.25V/V	SOT-23-5	28opa	OP1	6k	Max
ADJF	-	MAX4074AFUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=1.5V/V	SOT-23-5	28opa	OP1	6k	Max
ADJG	-	MAX4074AGUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=2V/V	SOT-23-5	28opa	OP1	6k	Max
ADJH	-	MAX4074AHUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=2.5V/V	SOT-23-5	28opa	OP1	6k	Max
ADJI	-	MAX4074AJUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=3V/V	SOT-23-5	28opa	OP1	6k	Max
ADJJ	-	MAX4074AKUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=4V/V	SOT-23-5	28opa	OP1	6k	Max
ADJK	-	MAX4074ALUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=5V/V	SOT-23-5	28opa	OP1	6k	Max
ADJL	-	MAX4074AMUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=6V/V	SOT-23-5	28opa	OP1	6k	Max
ADJM	-	MAX4074ANUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=8V/V	SOT-23-5	28opa	OP1	6k	Max
ADJN	-	MAX4074AOUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=9V/V	SOT-23-5	28opa	OP1	6k	Max
ADJO	-	MAX4074BAUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=10V/V	SOT-23-5	28opa	OP1	6k	Max
ADJP	-	MAX4074BBUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=12.5V/V	SOT-23-5	28opa	OP1	6k	Max
ADJQ	-	MAX4074BCUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=15V/V	SOT-23-5	28opa	OP1	6k	Max
ADJR	-	MAX4074BDUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=20V/V	SOT-23-5	28opa	OP1	6k	Max
ADJS	-	MAX4074BEUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=24V/V	SOT-23-5	28opa	OP1	6k	Max
ADJT	-	MAX4074BFUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=25V/V	SOT-23-5	28opa	OP1	6k	Max
ADJU	-	MAX4074BGUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=30V/V	SOT-23-5	28opa	OP1	6k	Max
ADJV	-	MAX4074BHUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=40V/V	SOT-23-5	28opa	OP1	6k	Max
ADJW	-	MAX4074BJUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=49V/V	SOT-23-5	28opa	OP1	6k	Max
ADJX	-	MAX4074BKUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=50V/V	SOT-23-5	28opa	OP1	6k	Max
ADJY	-	MAX4074BLUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=60V/V	SOT-23-5	28opa	OP1	6k	Max
ADJZ	-	MAX4074BMUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=79V/V	SOT-23-5	28opa	OP1	6k	Max
ADK	-	XC6211D482MR	LVR-IC	LDO, 4.8V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
ADK	-	XC6501D481MR-G	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ADK	eb	XC6367A375MR	DC-DC-IC	PWM step-up, 3.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ADK	ec	XC6114C418MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADK	ej	XC6114C448MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADK	ek	XC6365A375MR	DC-DC-IC	PWM st-down, 500kHz, 3.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ADKA	-	MAX4074BNUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=99V/V	SOT-23-5	28opa	OP1	6k	Max
ADKB	-	MAX4074CAUK-T	Op-IC	µPower, ±1.2..±2.75V, Icco= 37µA, Vg=100V/V	SOT-23-5	28opa	OP1	6k	Max
ADKD	-	MAX8867EUK40-T	LVR-IC	LDO, 4.0V±1.4%, 150mA, +CE	SOT-23-5	28sp	VR7	6a	Max
ADKE	-	MAX6504UKP015	Tdet-IC	+15°C, PPO	SOT-23-5	28hf	-	6k	Max
ADL	-	XC6211D492MR	LVR-IC	LDO, 4.9V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
ADL	-	XC6501D491MR-G	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ADL	eb	XC6367A385MR	DC-DC-IC	PWM step-up, 3.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ADL	ec	XC6114C419MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADL	ej	XC6114C449MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADL	ek	XC6365A385MR	DC-DC-IC	PWM st-down, 500kHz, 3.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ADM	-	XC6211D502MR	LVR-IC	LDO, 5.0V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
ADM	-	XC6501D501MR-G	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ADM	eb	XC6367A395MR	DC-DC-IC	PWM step-up, 3.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
ADM	ec	XC6114C420MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADM	ej	XC6114C450MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADM	ek	XC6365A395MR	DC-DC-IC	PWM st-down, 500kHz, 3.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
ADN	ec	XC6114C421MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ADP	ec	XC6114C422MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADPM	-	MAX8877EZK29-T	LVR-IC	LDO, 2.84V±1.4%, 150mA, +CE	SOT-23-5T	28vrx	VR7	6k	Max
ADPO	-	MAX8878EZK29-T	LVR-IC	LDO, 2.84V±1.4%, 150mA, +CE, CL	SOT-23-5T	28vrx	VR7	6k	Max
ADQM	-	MAX8867EZK25-T	LVR-IC	LDO, 2.5V±1.4%, 150mA, +CE	SOT-23-5T	28sp	VR7	6a	Max
ADQN	-	MAX8867EZK27-T	LVR-IC	LDO, 2.7V±1.4%, 150mA, +CE	SOT-23-5T	28sp	VR7	6a	Max
ADQO	-	MAX8867EZK28-T	LVR-IC	LDO, 2.8V±1.4%, 150mA, +CE	SOT-23-5T	28sp	VR7	6a	Max
ADQP	-	MAX8867EZK29-T	LVR-IC	LDO, 2.84V±1.4%, 150mA, +CE	SOT-23-5T	28sp	VR7	6a	Max
ADQQ	-	MAX8867EZK30-T	LVR-IC	LDO, 3.0V±1.4%, 150mA, +CE	SOT-23-5T	28sp	VR7	6a	Max
ADQR	-	MAX8867EZK32-T	LVR-IC	LDO, 3.15V±1.4%, 150mA, +CE	SOT-23-5T	28sp	VR7	6a	Max
ADQS	-	MAX8867EZK33-T	LVR-IC	LDO, 3.3V±1.4%, 150mA, +CE	SOT-23-5T	28sp	VR7	6a	Max
ADQT	-	MAX8867EZK36-T	LVR-IC	LDO, 3.6V±1.4%, 150mA, +CE	SOT-23-5T	28sp	VR7	6a	Max
ADQT	-	MAX8877EUK18-T	LVR-IC	LDO, 1.8V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6k	Max
ADQU	-	MAX8867EZK40-T	LVR-IC	LDO, 4.0V±1.4%, 150mA, +CE	SOT-23-5T	28sp	VR7	6a	Max
ADQV	-	MAX8867EZK50-T	LVR-IC	LDO, 5.0V±1.4%, 150mA, +CE	SOT-23-5T	28sp	VR7	6a	Max
ADQV	-	MAX8878EUK15-T	LVR-IC	LDO, 1.5V±1.4%, 150mA, +CE, CL	SOT-23-5	28vrx	VR7	6k	Max
ADQW	-	MAX8868EZK25-T	LVR-IC	LDO, 2.5V±1.4%, 150mA, +CE, CL	SOT-23-5T	28sp	VR7	6a	Max
ADQX	-	MAX8868EZK28-T	LVR-IC	LDO, 2.8V±1.4%, 150mA, +CE, CL	SOT-23-5T	28sp	VR7	6a	Max
ADQY	-	MAX8868EZK29-T	LVR-IC	LDO, 2.84V±1.4%, 150mA, +CE, CL	SOT-23-5T	28sp	VR7	6a	Max
ADQZ	-	MAX8868EZK30-T	LVR-IC	LDO, 3.0V±1.4%, 150mA, +CE, CL	SOT-23-5T	28sp	VR7	6a	Max
ADR	ec	XC6114C423MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADRA	-	MAX8868EZK32-T	LVR-IC	LDO, 3.15V±1.4%, 150mA, +CE, CL	SOT-23-5T	28sp	VR7	6a	Max
ADRB	-	MAX8868EZK33-T	LVR-IC	LDO, 3.3V±1.4%, 150mA, +CE, CL	SOT-23-5T	28sp	VR7	6a	Max
ADRC	-	MAX8868EZK36-T	LVR-IC	LDO, 3.6V±1.4%, 150mA, +CE, CL	SOT-23-5T	28sp	VR7	6a	Max
ADRD	-	MAX8868EZK50-T	LVR-IC	LDO, 5.0V±1.4%, 150mA, +CE, CL	SOT-23-5T	28sp	VR7	6a	Max
ADRG	-	MAX8877EUK15-T	LVR-IC	LDO, 1.5V±1.4%, 150mA, +CE	SOT-23-5	28vrx	VR7	6k	Max
ADRH	-	MAX8878EUK18-T	LVR-IC	LDO, 1.8V±1.4%, 150mA, +CE, CL	SOT-23-5	28vrx	VR7	6k	Max
ADS	ec	XC6114C424MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADT	ec	XC6114C425MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADU	ec	XC6114C426MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADV	ec	XC6114C427MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADX	ec	XC6114C428MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADY	ec	XC6114C429MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
ADZ	ec	XC6114C430MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
Ae	-	BD48E27G	Vdet-IC	2.7V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
AE	-	74AHC1G08GW	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Nxp
AE	-	HD74ALVC1G07VS	CMOS-Log	Noninverting buffer/driver (ODO)	VSON-5	30	Log8	6a	Ren
AE	-	PI74ST1G79CX	CMOS-Log	Positive edge-triggered D-type flip-flop	SC-70-5	28	Log20	6a	Per
AE	-	PI74ST1G79TX	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT-23-5	28	Log20	6a	Per
AE	-	RN5RT24AA	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
AE	-	SiP823REU	Vdet-IC	2.63V±1.5%, MR, Strobe, -Reset PPO	SOT-23-5	28cp	VD17	6k	Vs
AE	-	SN74AHC1G08DCK	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6g	Ti
AE	-	SN74AHC1G08DRL	CMOS-Log	2-input AND gate	SOT-553	30	Log3	6g	Ti
AE-	-	RT9193-31PU5	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
AE0	eb	XC6367A401MR	DC-DC-IC	PWM step-up, 4.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AE0	ej	XC6114C531MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AE0	ek	XC6365A401MR	DC-DC-IC	PWM st-down, 100kHz, 4.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AE08	-	RP109Q082B	LVR-IC	LDO, 0.8V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE09	-	RP109Q092B	LVR-IC	LDO, 0.9V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE1	-	LD6815TD/33P	LVR-IC	LDO, 3.3V±3%, 150mA, +CE, auto-discharge	SOT753	28cx	VR4	6hb	Nxp
AE1	eb	XC6367A411MR	DC-DC-IC	PWM step-up, 4.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AE1	ej	XC6114C532MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AE1	ek	XC6365A411MR	DC-DC-IC	PWM st-down, 100kHz, 4.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AE10	-	RP109Q102B	LVR-IC	LDO, 1.0V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE11	-	RP109Q112B	LVR-IC	LDO, 1.1V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE12	-	RP109Q122B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE13	-	RP109Q132B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE14	-	RP109Q142B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE15	-	RP109Q152B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE16	-	RP109Q162B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE17	-	RP109Q172B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE18	-	RP109Q182B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE19	-	RP109Q192B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE2	-	LD6815TD/36P	LVR-IC	LDO, 3.6V±3%, 150mA, +CE, auto-discharge	SOT753	28cx	VR4	6hb	Nxp
AE2	eb	XC6367A421MR	DC-DC-IC	PWM step-up, 4.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AE2	ej	XC6114C533MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AE2	ek	XC6365A421MR	DC-DC-IC	PWM st-down, 100kHz, 4.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AE20	-	RP109Q202B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE21	-	RP109Q212B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE22	-	RP109Q222B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE23	-	RP109Q232B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AE24	-	RP109Q242B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE25	-	RP109Q252B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE26	-	RP109Q262B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE27	-	RP109Q272B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE28	-	RP109Q282B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE29	-	RP109Q292B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE3	-	LD6815TD/21P	LVR-IC	LDO, 2.1V±3%, 150mA, +CE, auto-discharge	SOT753	28cx	VR4	6hb	Nxp
AE3	eb	XC6367A431MR	DC-DC-IC	PWM step-up, 4.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AE3	ej	XC6114C534MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AE3	ek	XC6365A431MR	DC-DC-IC	PWM st-down, 100kHz, 4.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AE30	-	RP109Q302B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE31	-	RP109Q312B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE32	-	RP109Q322B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE33	-	RP109Q332B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE34	-	RP109Q342B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE35	-	RP109Q352B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE36	-	RP109Q362B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE37	-	RP109Q122B5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE38	-	RP109Q182B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE39	-	RP109Q282B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE4	-	LD6815TD/21H	LVR-IC	LDO, 2.1V±3%, 150mA, +CE	SOT753	28cx	VR4	6hb	Nxp
AE4	-	U74AHC1G14-AF5	CMOS-Log	Inverting Schmitt-trigger	SOT-23-5	28	Log7	6a	Utc
AE4	eb	XC6367A441MR	DC-DC-IC	PWM step-up, 4.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AE4	ej	XC6114C535MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AE4	ek	XC6365A441MR	DC-DC-IC	PWM st-down, 100kHz, 4.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AE40	-	RP109Q342B5	LVR-IC	LDO, 3.45V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AE5	eb	XC6367A451MR	DC-DC-IC	PWM step-up, 4.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AE5	ej	XC6114C536MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AE5	ek	XC6365A451MR	DC-DC-IC	PWM st-down, 100kHz, 4.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AE6	eb	XC6367A461MR	DC-DC-IC	PWM step-up, 4.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AE6	ej	XC6114C537MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AE6	ek	XC6365A461MR	DC-DC-IC	PWM st-down, 100kHz, 4.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AE7	eb	XC6367A471MR	DC-DC-IC	PWM step-up, 4.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AE7	ej	XC6114C538MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AE7	ek	XC6365A471MR	DC-DC-IC	PWM st-down, 100kHz, 4.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AE8	-	XC6211A09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AE8	eb	XC6367A481MR	DC-DC-IC	PWM step-up, 4.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AE8	ej	XC6114C539MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AE8	ek	XC6365A481MR	DC-DC-IC	PWM st-down, 100kHz, 4.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AE9	-	XC6211A10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AE9	eb	XC6367A491MR	DC-DC-IC	PWM step-up, 4.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AE9	ej	XC6114C540MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AE9	ek	XC6365A491MR	DC-DC-IC	PWM st-down, 100kHz, 4.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AEA	-	XC6211A11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AEA	eb	XC6367A405MR	DC-DC-IC	PWM step-up, 4.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AEA	ej	XC6114C541MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEA	ek	XC6365A405MR	DC-DC-IC	PWM st-down, 500kHz, 4.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AEAO	-	MAX6445UK46L	Vdet-IC	4.6V±1.5%, ±MR, -Reset PPO	SOT-23-5	28cq	-	6k	Max
AEAP	-	MAX6446UK29L	Vdet-IC	2.9V±1.5%, ±MR, -Reset ODO	SOT-23-5	28cq	-	6k	Max
AEAQ	-	MAX6447UK26L	Vdet-IC	2.6V±1.5%, ±MR, -Reset PPO	SOT-23-5	28cq	-	6k	Max
AEB	-	XC6211A12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AEB	-	XC6501A12AMR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AEB	eb	XC6367A415MR	DC-DC-IC	PWM step-up, 4.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AEB	ej	XC6114C542MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEB	ek	XC6365A415MR	DC-DC-IC	PWM st-down, 500kHz, 4.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AEC	-	XC6211A13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AEC	-	XC6501A13AMR-G	LVR-IC	LDO, 1.35V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AEC	eb	XC6367A425MR	DC-DC-IC	PWM step-up, 4.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AEC	ej	XC6114C543MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEC	ek	XC6365A425MR	DC-DC-IC	PWM st-down, 500kHz, 4.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AED	-	XC6211A14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AED	-	XC6501A14AMR-G	LVR-IC	LDO, 1.45V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AED	eb	XC6367A435MR	DC-DC-IC	PWM step-up, 4.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AED	ej	XC6114C544MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AED	ek	XC6365A435MR	DC-DC-IC	PWM st-down, 500kHz, 4.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AEE	-	AME8800HEEV	LVR-IC	LDO, 2.7V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
AEE	-	AME8800HEEVL	LVR-IC	LDO, 2.7V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AEE	-	XC6211A15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AEE	-	XC6501A15AMR-G	LVR-IC	LDO, 1.55V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AEE	eb	XC6367A445MR	DC-DC-IC	PWM step-up, 4.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AEE	eh	AME8800HEEVY	LVR-IC	LDO, 2.7V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AEE	eh	AME8800HEEVZ	LVR-IC	LDO, 2.7V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
AEE	ej	XC6114C545MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEE	ek	XC6365A445MR	DC-DC-IC	PWM st-down, 500kHz, 4.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AEEF	-	MAX6445UK16L	Vdet-IC	1.6V±1.5%, ±MR, -Reset PPO	SOT-23-5	28cq	-	6k	Max
AEEG	-	MAX6445UK23L	Vdet-IC	2.3V±1.5%, ±MR, -Reset PPO	SOT-23-5	28cq	-	6k	Max
AEEH	-	MAX6445UK26L	Vdet-IC	2.6V±1.5%, ±MR, -Reset PPO	SOT-23-5	28cq	-	6k	Max
AEEI	-	MAX6445UK29L	Vdet-IC	2.9V±1.5%, ±MR, -Reset PPO	SOT-23-5	28cq	-	6k	Max
AEEJ	-	MAX6447UK16L	Vdet-IC	1.6V±1.5%, ±MR, -Reset PPO	SOT-23-5	28cq	-	6k	Max
AEEK	-	MAX6447UK23L	Vdet-IC	2.3V±1.5%, ±MR, -Reset PPO	SOT-23-5	28cq	-	6k	Max
AEEL	-	MAX6447UK29L	Vdet-IC	2.9V±1.5%, ±MR, -Reset PPO	SOT-23-5	28cq	-	6k	Max
AEEM	-	MAX6447UK46L	Vdet-IC	4.6V±1.5%, ±MR, -Reset PPO	SOT-23-5	28cq	-	6k	Max
AEEN	-	MAX6446UK16L	Vdet-IC	1.6V±1.5%, ±MR, -Reset ODO	SOT-23-5	28cq	-	6k	Max
AEEO	-	MAX6446UK23L	Vdet-IC	2.3V±1.5%, ±MR, -Reset ODO	SOT-23-5	28cq	-	6k	Max
AEEP	-	MAX6446UK26L	Vdet-IC	2.6V±1.5%, ±MR, -Reset ODO	SOT-23-5	28cq	-	6k	Max
AEEQ	-	MAX6446UK46L	Vdet-IC	4.6V±1.5%, ±MR, -Reset ODO	SOT-23-5	28cq	-	6k	Max
AEER	-	MAX6448UK16L	Vdet-IC	1.6V±1.5%, ±MR, -Reset ODO	SOT-23-5	28cq	-	6k	Max
AEES	-	MAX6448UK23L	Vdet-IC	2.3V±1.5%, ±MR, -Reset ODO	SOT-23-5	28cq	-	6k	Max
AEET	-	MAX6448UK26L	Vdet-IC	2.6V±1.5%, ±MR, -Reset ODO	SOT-23-5	28cq	-	6k	Max
AEEU	-	MAX6448UK29L	Vdet-IC	2.9V±1.5%, ±MR, -Reset ODO	SOT-23-5	28cq	-	6k	Max
AEEV	-	MAX6448UK46L	Vdet-IC	4.6V±1.5%, ±MR, -Reset ODO	SOT-23-5	28cq	-	6k	Max
AEF	-	XC6211A16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AEF	-	XC6501A16AMR-G	LVR-IC	LDO, 1.65V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AEF	eb	XC6367A455MR	DC-DC-IC	PWM step-up, 4.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AEF	ec	XC6114C516MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEF	ej	XC6114C546MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEF	ek	XC6365A455MR	DC-DC-IC	PWM st-down, 500kHz, 4.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AEFA	-	MAX1615AUK	LVR-IC	3.3/5.0V±2%, 40mA	SOT-23-5	28	-	6a	Max
AEFB	-	MAX1616AUK	LVR-IC	Adj. 1.24..28V±2%, 40mA	SOT-23-5	28	-	6a	Max
AEH	-	XC6211A17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AEH	-	XC6501A17AMR-G	LVR-IC	LDO, 1.75V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AEH	eb	XC6367A465MR	DC-DC-IC	PWM step-up, 4.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AEH	ec	XC6114C517MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEH	ej	XC6114C547MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEH	ek	XC6365A465MR	DC-DC-IC	PWM st-down, 500kHz, 4.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AEJN	-	MAX6754UKLD3	Vdet-IC	5.0V±1.5%, -MR, -Reset PPO, 200ms	SOT-23-5	28	-	6a	Max
AEJO	-	MAX6754UKTD3	Vdet-IC	3.3V±1.5%, -MR, -Reset PPO, 200ms	SOT-23-5	28	-	6a	Max
AEJQ	-	MAX6754UKZD0	Vdet-IC	2.5V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28	-	6a	Max
AEJR	-	MAX6754UKWD3	Vdet-IC	1.8V±1.5%, -MR, -Reset PPO, 200ms	SOT-23-5	28	-	6a	Max
AEJS	-	MAX6755UKLD3	Vdet-IC	5.0V±1.5%, -MR, +Reset PPO, 200ms	SOT-23-5	28	-	6a	Max
AEJT	-	MAX6755UKTD3	Vdet-IC	3.3V±1.5%, -MR, +Reset PPO, 200ms	SOT-23-5	28	-	6a	Max
AEJW	-	MAX6755UKWD3	Vdet-IC	1.8V±1.5%, -MR, +Reset PPO, 200ms	SOT-23-5	28	-	6a	Max
AEJX	-	MAX6756UKLD0	Vdet-IC	5.0V±1.5%, -MR, +Reset ODO, 20ms	SOT-23-5	28	-	6a	Max
AEJY	-	MAX6756UKTD0	Vdet-IC	3.3V±1.5%, -MR, +Reset ODO, 20ms	SOT-23-5	28	-	6a	Max
AEK	-	XC6211A18AMR	LVR-IC	LDO, 1.85V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AEK	-	XC6501A18AMR-G	LVR-IC	LDO, 1.85V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AEK	eb	XC6367A475MR	DC-DC-IC	PWM step-up, 4.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AEK	ec	XC6114C518MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEK	ej	XC6114C548MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEK	ek	XC6365A475MR	DC-DC-IC	PWM st-down, 500kHz, 4.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AEKA	-	MAX6756UKZD3	Vdet-IC	2.5V±1.5%, -MR, +Reset ODO, 200ms	SOT-23-5	28	-	6a	Max
AEKB	-	MAX6756UKWD0	Vdet-IC	1.8V±1.5%, -MR, +Reset ODO, 20ms	SOT-23-5	28	-	6a	Max
AEKV	-	MAX6755UKZD0	Vdet-IC	2.5V±1.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28	-	6a	Max
AEL	-	XC6211A19AMR	LVR-IC	LDO, 1.95V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AEL	-	XC6501A19AMR-G	LVR-IC	LDO, 1.95V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AEL	eb	XC6367A485MR	DC-DC-IC	PWM step-up, 4.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AEL	ec	XC6114C519MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEL	ej	XC6114C549MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEL	ek	XC6365A485MR	DC-DC-IC	PWM st-down, 500kHz, 4.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AEM	-	AME8800IEEV	LVR-IC	LDO, 3.4V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
AEM	-	AME8800IEEVL	LVR-IC	LDO, 3.4V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AEM	-	XC6211A20AMR	LVR-IC	LDO, 2.05V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AEM	-	XC6501A20AMR-G	LVR-IC	LDO, 2.05V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AEM	eb	XC6367A495MR	DC-DC-IC	PWM step-up, 4.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AEM	ec	XC6114C520MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEM	eh	AME8800IEEVY	LVR-IC	LDO, 3.4V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AEM	eh	AME8800IEEVZ	LVR-IC	LDO, 3.4V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
AEM	ej	XC6114C550MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEM	ek	XC6365A495MR	DC-DC-IC	PWM st-down, 500kHz, 4.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AEN	-	XC6211A21AMR	LVR-IC	LDO, 2.15V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AEN	-	XC6501A21AMR-G	LVR-IC	LDO, 2.15V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AEN	ec	XC6114C521MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEOC	-	MAX6754UKLD0	Vdet-IC	5.0V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28	-	6a	Max
AEOD	-	MAX6754UKTD0	Vdet-IC	3.3V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28	-	6a	Max
AEOF	-	MAX6754UKZD3	Vdet-IC	2.5V±1.5%, -MR, -Reset PPO, 200ms	SOT-23-5	28	-	6a	Max
AEOG	-	MAX6754UKWD0	Vdet-IC	1.8V±1.5%, -MR, -Reset PPO, 20ms	SOT-23-5	28	-	6a	Max
AEOH	-	MAX6755UKLD0	Vdet-IC	5.0V±1.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28	-	6a	Max
AEOI	-	MAX6755UKTD0	Vdet-IC	3.3V±1.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28	-	6a	Max
AEOK	-	MAX6755UKZD3	Vdet-IC	2.5V±1.5%, -MR, +Reset PPO, 200ms	SOT-23-5	28	-	6a	Max
AEOL	-	MAX6755UKWD0	Vdet-IC	1.8V±1.5%, -MR, +Reset PPO, 20ms	SOT-23-5	28	-	6a	Max
AEOM	-	MAX6756UKLD3	Vdet-IC	5.0V±1.5%, -MR, +Reset ODO, 200ms	SOT-23-5	28	-	6a	Max
AEON	-	MAX6756UKTD3	Vdet-IC	3.3V±1.5%, -MR, +Reset ODO, 200ms	SOT-23-5	28	-	6a	Max
AEOP	-	MAX6756UKZD0	Vdet-IC	2.5V±1.5%, -MR, +Reset ODO, 20ms	SOT-23-5	28	-	6a	Max
AEOQ	-	MAX6756UKWD3	Vdet-IC	1.8V±1.5%, -MR, +Reset ODO, 200ms	SOT-23-5	28	-	6a	Max
AEP	-	XC6211A22AMR	LVR-IC	LDO, 2.25V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AEP	-	XC6501A22AMR-G	LVR-IC	LDO, 2.25V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AEP	ec	XC6114C522MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AER	-	XC6211A23AMR	LVR-IC	LDO, 2.35V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AER	-	XC6501A23AMR-G	LVR-IC	LDO, 2.35V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AER	ec	XC6114C523MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AES	-	XC6211A24AMR	LVR-IC	LDO, 2.45V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AES	-	XC6501A24AMR-G	LVR-IC	LDO, 2.45V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AES	ec	XC6114C524MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AET	-	XC6211A25AMR	LVR-IC	LDO, 2.55V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AET	-	XC6501A25AMR-G	LVR-IC	LDO, 2.55V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AET	ec	XC6114C525MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEU	-	XC6211A26AMR	LVR-IC	LDO, 2.65V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AEU	-	XC6501A26AMR-G	LVR-IC	LDO, 2.65V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AEU	ec	XC6114C526MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEV	-	XC6211A27AMR	LVR-IC	LDO, 2.75V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AEV	-	XC6501A27AMR-G	LVR-IC	LDO, 2.75V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AEV	ec	XC6114C527MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEX	-	XC6211A28AMR	LVR-IC	LDO, 2.85V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AEX	-	XC6501A28AMR-G	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AEX	ec	XC6114C528MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEY	-	XC6211A29AMR	LVR-IC	LDO, 2.95V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AEY	-	XC6501A29AMR-G	LVR-IC	LDO, 2.95V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AEY	ec	XC6114C529MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AEZ	-	XC6211A30AMR	LVR-IC	LDO, 3.05V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AEZ	-	XC6501A30AMR-G	LVR-IC	LDO, 3.05V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AEZ	ec	XC6114C530MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
Af	-	BD48E28G	Vdet-IC	2.8V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
AF	-	74AHC1G14GW	CMOS-Log	Inverting Schmitt-trigger	SOT-353	28	Log7	6a	Nxp
AF	-	HD74ALVC1G79VS	CMOS-Log	Positive edge-triggered D-type flip-flop	VSON-5	30	Log20	6a	Ren
AF	-	RN5RT25AA	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
AF-	-	RT9198-18PU5R	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6a	Rct
AF0	eb	XC6367A501MR	DC-DC-IC	PWM step-up, 5.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AF0	ej	XC6114C631MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AF0	ek	XC6365A501MR	DC-DC-IC	PWM st-down, 100kHz, 5.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AF08	-	RP109Q082D	LVR-IC	LDO, 0.8V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF09	-	RP109Q092D	LVR-IC	LDO, 0.9V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF1	eb	XC6367A511MR	DC-DC-IC	PWM step-up, 5.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AF1	ej	XC6114C632MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AF1	ek	XC6365A511MR	DC-DC-IC	PWM st-down, 100kHz, 5.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AF10	-	RP109Q102D	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF11	-	RP109Q112D	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF12	-	RP109Q122D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF13	-	RP109Q132D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF14	-	RP109Q142D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF15	-	RP109Q152D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF16	-	RP109Q162D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF17	-	RP109Q172D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF18	-	RP109Q182D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF19	-	RP109Q192D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF2	eb	XC6367A521MR	DC-DC-IC	PWM step-up, 5.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AF2	ej	XC6114C633MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AF2	ek	XC6365A521MR	DC-DC-IC	PWM st-down, 100kHz, 5.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AF20	-	RP109Q202D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF21	-	RP109Q212D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF22	-	RP109Q222D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AF23	-	RP109Q232D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF24	-	RP109Q242D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF25	-	RP109Q252D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF26	-	RP109Q262D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF27	-	RP109Q272D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF28	-	RP109Q282D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF29	-	RP109Q292D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF3	eb	XC6367A531MR	DC-DC-IC	PWM step-up, 5.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AF3	ej	XC6114C634MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AF3	ek	XC6365A531MR	DC-DC-IC	PWM st-down, 100kHz, 5.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AF30	-	RP109Q302D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF31	-	RP109Q312D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF32	-	RP109Q322D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF33	-	RP109Q332D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF34	-	RP109Q342D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF35	-	RP109Q352D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF36	-	RP109Q362D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF37	-	RP109Q122D5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF38	-	RP109Q182D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF39	-	RP109Q282D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF4	eb	XC6367A541MR	DC-DC-IC	PWM step-up, 5.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AF4	ej	XC6114C635MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AF4	ek	XC6365A541MR	DC-DC-IC	PWM st-down, 100kHz, 5.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AF40	-	RP109Q342D5	LVR-IC	LDO, 3.45V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AF5	eb	XC6367A551MR	DC-DC-IC	PWM step-up, 5.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AF5	ej	XC6114C636MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AF5	ek	XC6365A551MR	DC-DC-IC	PWM st-down, 100kHz, 5.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AF6	eb	XC6367A561MR	DC-DC-IC	PWM step-up, 5.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AF6	ej	XC6114C637MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AF6	ek	XC6365A561MR	DC-DC-IC	PWM st-down, 100kHz, 5.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AF7	eb	XC6367A571MR	DC-DC-IC	PWM step-up, 5.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AF7	ej	XC6114C638MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AF7	ek	XC6365A571MR	DC-DC-IC	PWM st-down, 100kHz, 5.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AF8	-	XC6211B09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AF8	eb	XC6367A581MR	DC-DC-IC	PWM step-up, 5.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AF8	ej	XC6114C639MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AF8	ek	XC6365A581MR	DC-DC-IC	PWM st-down, 100kHz, 5.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AF9	-	XC6211B10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AF9	eb	XC6367A591MR	DC-DC-IC	PWM step-up, 5.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AF9	ej	XC6114C640MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AF9	ek	XC6365A591MR	DC-DC-IC	PWM st-down, 100kHz, 5.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AFA	-	XC6211B11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFA	eb	XC6367A505MR	DC-DC-IC	PWM step-up, 5.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AFA	ej	XC6114C641MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFA	ek	XC6365A505MR	DC-DC-IC	PWM st-down, 500kHz, 5.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AFB	-	XC6211B12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFB	-	XC6501B12AMR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFB	eb	XC6367A515MR	DC-DC-IC	PWM step-up, 5.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AFB	ej	XC6114C642MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFB	ek	XC6365A515MR	DC-DC-IC	PWM st-down, 500kHz, 5.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AFC	-	XC6211B13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFC	-	XC6501B13AMR-G	LVR-IC	LDO, 1.35V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFC	eb	XC6367A525MR	DC-DC-IC	PWM step-up, 5.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AFC	ej	XC6114C643MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFC	ek	XC6365A525MR	DC-DC-IC	PWM st-down, 500kHz, 5.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AFD	-	XC6211B14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFD	-	XC6501B14AMR-G	LVR-IC	LDO, 1.45V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFD	eb	XC6367A535MR	DC-DC-IC	PWM step-up, 5.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AFD	ej	XC6114C644MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFD	ek	XC6365A535MR	DC-DC-IC	PWM st-down, 500kHz, 5.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AFE	-	XC6211B15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFE	-	XC6501B15AMR-G	LVR-IC	LDO, 1.55V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFE	eb	XC6367A545MR	DC-DC-IC	PWM step-up, 5.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AFE	ej	XC6114C645MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFE	ek	XC6365A545MR	DC-DC-IC	PWM st-down, 500kHz, 5.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AFF	-	XC6211B16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFF	-	XC6501B16AMR-G	LVR-IC	LDO, 1.65V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFF	eb	XC6367A555MR	DC-DC-IC	PWM step-up, 5.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AFF	ec	XC6114C616MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFF	ej	XC6114C646MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AFF	ek	XC6365A555MR	DC-DC-IC	PWM st-down, 500kHz, 5.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AFH	-	XC6211B17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFH	-	XC6501B17AMR-G	LVR-IC	LDO, 1.75V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFH	eb	XC6367A565MR	DC-DC-IC	PWM step-up, 5.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AFH	ec	XC6114C617MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFH	ej	XC6114C647MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFH	ek	XC6365A565MR	DC-DC-IC	PWM st-down, 500kHz, 5.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AFK	-	XC6211B18AMR	LVR-IC	LDO, 1.85V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFK	-	XC6501B18AMR-G	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFK	eb	XC6367A575MR	DC-DC-IC	PWM step-up, 5.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AFK	ec	XC6114C618MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFK	ej	XC6114C648MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFK	ek	XC6365A575MR	DC-DC-IC	PWM st-down, 500kHz, 5.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AFL	-	XC6211B19AMR	LVR-IC	LDO, 1.95V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFL	-	XC6501B19AMR-G	LVR-IC	LDO, 1.95V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFL	eb	XC6367A585MR	DC-DC-IC	PWM step-up, 5.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AFL	ec	XC6114C619MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFL	ej	XC6114C649MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFL	ek	XC6365A585MR	DC-DC-IC	PWM st-down, 500kHz, 5.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AFM	-	XC6211B20AMR	LVR-IC	LDO, 2.05V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFM	-	XC6501B20AMR-G	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFM	eb	XC6367A595MR	DC-DC-IC	PWM step-up, 5.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AFM	ec	XC6114C620MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFM	ej	XC6114C650MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFM	ek	XC6365A595MR	DC-DC-IC	PWM st-down, 500kHz, 5.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AFN	-	XC6211B21AMR	LVR-IC	LDO, 2.15V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFN	-	XC6501B21AMR-G	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFN	ec	XC6114C621MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFP	-	XC6211B22AMR	LVR-IC	LDO, 2.25V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFP	-	XC6501B22AMR-G	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFP	ec	XC6114C622MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFR	-	XC6211B23AMR	LVR-IC	LDO, 2.35V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFR	-	XC6501B23AMR-G	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFR	ec	XC6114C623MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFS	-	XC6211B24AMR	LVR-IC	LDO, 2.45V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFS	-	XC6501B24AMR-G	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFS	ec	XC6114C624MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFT	-	XC6211B25AMR	LVR-IC	LDO, 2.55V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFT	-	XC6501B25AMR-G	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFT	ec	XC6114C625MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFU	-	XC6211B26AMR	LVR-IC	LDO, 2.65V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFU	-	XC6501B26AMR-G	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFU	ec	XC6114C626MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFV	-	XC6211B27AMR	LVR-IC	LDO, 2.75V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFV	-	XC6501B27AMR-G	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFV	ec	XC6114C627MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFX	-	XC6211B28AMR	LVR-IC	LDO, 2.85V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFX	-	XC6501B28AMR-G	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFX	ec	XC6114C628MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFY	-	XC6211B29AMR	LVR-IC	LDO, 2.95V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFY	-	XC6501B29AMR-G	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFY	ec	XC6114C629MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
AFZ	-	XC6211B30AMR	LVR-IC	LDO, 3.05V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AFZ	-	XC6501B30AMR-G	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AFZ	ec	XC6114C630MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD19	6g	Tor
Ag	-	BD48E29G	Vdet-IC	2.9V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
AG	-	74AHC1G32GW	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6a	Nxp
AG	-	AP431IQ	Vref-IC	Adjustable, Precision, Shunt, 2.495V±1%	SOT-23-5	28re	RF1	6k	Ana
AG	-	HD74ALVC1G80VS	CMOS-Log	Positive edge-triggered D-type flip-flop	VSON-5	30	Log21	6a	Ren
AG	-	PI74ST1G86CX	CMOS-Log	2-input EXCLUSIVE-OR gate	SC-70-5	28	Log5	6a	Per
AG	-	PI74ST1G86TX	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-23-5	28	Log5	6a	Per
AG	-	RN5RT26AA	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
AG	-	SiP823ZEU	Vdet-IC	2.32V±1.5%, MR, Strobe, -Reset PPO	SOT-23-5	28cp	VD17	6k	Vs
AG-	-	RT9198-27PU5	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SC-70-5	28xm	VR4	6a	Rct
AG08	-	RP114Q082B	LVR-IC	LDO, 0.8V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG09	-	RP114Q092B	LVR-IC	LDO, 0.9V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG10	-	RP114Q102B	LVR-IC	LDO, 1.0V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG11	-	RP114Q112B	LVR-IC	LDO, 1.1V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG12	-	RP114Q122B	LVR-IC	LDO, 1.2V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG13	-	RP114Q132B	LVR-IC	LDO, 1.3V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AG14	-	RP114Q142B	LVR-IC	LDO, 1.4V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG15	-	RP114Q152B	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG16	-	RP114Q162B	LVR-IC	LDO, 1.6V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG17	-	RP114Q172B	LVR-IC	LDO, 1.7V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG18	-	RP114Q182B	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG19	-	RP114Q192B	LVR-IC	LDO, 1.9V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG20	-	RP114Q202B	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG21	-	RP114Q212B	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG22	-	RP114Q222B	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG23	-	RP114Q232B	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG24	-	RP114Q242B	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG25	-	RP114Q252B	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG26	-	RP114Q262B	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG27	-	RP114Q272B	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG28	-	RP114Q282B	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG29	-	RP114Q292B	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG30	-	RP114Q302B	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG31	-	RP114Q312B	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG32	-	RP114Q322B	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG33	-	RP114Q332B	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG34	-	RP114Q342B	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG35	-	RP114Q352B	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG36	-	RP114Q362B	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG37	-	RP114Q122B5	LVR-IC	LDO, 1.25V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG38	-	RP114Q182B5	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG39	-	RP114Q282B5	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AG40	-	RP114Q342B5	LVR-IC	LDO, 3.45V±1%, 300mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AGO	-	AME8800JEEV	LVR-IC	LDO, 2.85V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
AGO	-	AME8800JEEVL	LVR-IC	LDO, 2.85V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AGO	eh	AME8800JEEVY	LVR-IC	LDO, 2.85V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AGO	eh	AME8800JEEVZ	LVR-IC	LDO, 2.85V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
AGU	-	ISL88011IH546Z	Vdet-IC	4.64V -Reset/-MR, +Reset PPO	SOT-23-5	28vd3	-	6a	Isl
AGV	-	ISL88011IH544Z	Vdet-IC	4.38V -Reset/-MR, +Reset PPO	SOT-23-5	28vd3	-	6a	Isl
AGW	-	ISL88011IH531Z	Vdet-IC	3.09V -Reset/-MR, +Reset PPO	SOT-23-5	28vd3	-	6a	Isl
AGX	-	ISL88011IH529Z	Vdet-IC	2.92V -Reset/-MR, +Reset PPO	SOT-23-5	28vd3	-	6a	Isl
AGY	-	ISL88011IH526Z	Vdet-IC	2.63V -Reset/-MR, +Reset PPO	SOT-23-5	28vd3	-	6a	Isl
AGZ	-	ISL88011IH523Z	Vdet-IC	2.32V -Reset/-MR, +Reset PPO	SOT-23-5	28vd3	-	6a	Isl
Ah	-	BD48E30G	Vdet-IC	3.0V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
AH	-	74AHC1G86GW	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353	28	Log5	6a	Nxp
AH	-	AP431IAQ	Vref-IC	Adjustable, Precision, Shunt, 2.495V±0.5%	SOT-23-5	28re	RF1	6k	Ana
AH	-	HD74ALVC1G240VS	CMOS-Log	Bus buffer inverted with 3–state output	VSON-5	30	Log22	6a	Ren
AH	-	RN5RT27AA	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
AH	-	SiP823YEU	Vdet-IC	2.19V±1.5%, MR, Strobe, -Reset PPO	SOT-23-5	28cp	VD17	6k	Vs
AH-	-	RT9198-32PU5	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SC-70-5	28xm	VR4	6a	Rct
AH0	eb	XC6367A601MR	DC-DC-IC	PWM step-up, 6.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AH0	ej	XC6114D331MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AH0	ek	XC6365A601MR	DC-DC-IC	PWM st-down, 100kHz, 6.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AH08	-	RP114Q082D	LVR-IC	LDO, 0.8V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH09	-	RP114Q092D	LVR-IC	LDO, 0.9V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH1	eb	XC6367A611MR	DC-DC-IC	PWM step-up, 6.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AH1	ej	XC6114D332MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AH10	-	RP114Q102D	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH11	-	RP114Q112D	LVR-IC	LDO, 1.1V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH12	-	RP114Q122D	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH13	-	RP114Q132D	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH14	-	RP114Q142D	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH15	-	RP114Q152D	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH16	-	RP114Q162D	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH17	-	RP114Q172D	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH18	-	RP114Q182D	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH19	-	RP114Q192D	LVR-IC	LDO, 1.9V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH2	eb	XC6367A621MR	DC-DC-IC	PWM step-up, 6.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AH2	ej	XC6114D333MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AH20	-	RP114Q202D	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH21	-	RP114Q212D	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH22	-	RP114Q222D	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH23	-	RP114Q232D	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH24	-	RP114Q242D	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH25	-	RP114Q252D	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH26	-	RP114Q262D	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AH27	-	RP114Q272D	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH28	-	RP114Q282D	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH29	-	RP114Q292D	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH3	eb	XC6367A631MR	DC-DC-IC	PWM step-up, 6.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AH3	ej	XC6114D334MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AH30	-	RP114Q302D	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH31	-	RP114Q312D	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH32	-	RP114Q322D	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH33	-	RP114Q332D	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH34	-	RP114Q342D	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH35	-	RP114Q352D	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH36	-	RP114Q362D	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH37	-	RP114Q122D5	LVR-IC	LDO, 1.25V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH38	-	RP114Q182D5	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH39	-	RP114Q282D5	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH4	eb	XC6367A641MR	DC-DC-IC	PWM step-up, 6.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AH4	ej	XC6114D335MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AH40	-	RP114Q342D5	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AH5	eb	XC6367A651MR	DC-DC-IC	PWM step-up, 6.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AH5	ej	XC6114D336MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AH6	ej	XC6114D337MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AH7	ej	XC6114D338MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AH8	-	XC6211C09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AH8	ej	XC6114D339MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AH9	-	XC6211C10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AH9	ej	XC6114D340MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHA	-	XC6211C11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHA	eb	XC6367A605MR	DC-DC-IC	PWM step-up, 6.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AHA	ej	XC6114D341MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHA	ek	XC6365A605MR	DC-DC-IC	PWM st-down, 500kHz, 6.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
AHB	-	XC6211C12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHB	-	XC6501C12AMR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHB	eb	XC6367A615MR	DC-DC-IC	PWM step-up, 6.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AHB	ej	XC6114D342MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHC	-	XC6211C13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHC	-	XC6501C13AMR-G	LVR-IC	LDO, 1.35V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHC	eb	XC6367A625MR	DC-DC-IC	PWM step-up, 6.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AHC	ej	XC6114D343MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHD	-	XC6211C14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHD	-	XC6501C14AMR-G	LVR-IC	LDO, 1.45V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHD	eb	XC6367A635MR	DC-DC-IC	PWM step-up, 6.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AHD	ej	XC6114D344MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHE	-	ISL88011IH522Z	Vdet-IC	2.19V, -Reset/-MR, +Reset PPO	SOT-23-5	28vd3	-	6a	Isl
AHE	-	XC6211C15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHE	-	XC6501C15AMR-G	LVR-IC	LDO, 1.55V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHE	eb	XC6367A645MR	DC-DC-IC	PWM step-up, 6.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AHE	ej	XC6114D345MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHF	-	ISL88012IH546Z	Vdet-IC	4.64V -Reset/-MR, +Reset PPO	SOT-23-5	28vd4	-	6a	Isl
AHF	-	XC6211C16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHF	-	XC6501C16AMR-G	LVR-IC	LDO, 1.65V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHF	eb	XC6367A655MR	DC-DC-IC	PWM step-up, 6.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
AHF	ec	XC6114D316MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHF	ej	XC6114D346MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHG	-	ISL88012IH544Z	Vdet-IC	4.38V -Reset/-MR, +Reset PPO	SOT-23-5	28vd4	-	6a	Isl
AHH	-	ISL88012IH531Z	Vdet-IC	3.09V -Reset/-MR, +Reset PPO	SOT-23-5	28vd4	-	6a	Isl
AHH	-	XC6211C17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHH	-	XC6501C17AMR-G	LVR-IC	LDO, 1.75V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHH	ec	XC6114D317MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHH	ej	XC6114D347MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHI	-	ISL88012IH529Z	Vdet-IC	2.92V -Reset/-MR, +Reset PPO	SOT-23-5	28vd4	-	6a	Isl
AHJ	-	ISL88012IH526Z	Vdet-IC	2.63V -Reset/-MR, +Reset PPO	SOT-23-5	28vd4	-	6a	Isl
AHK	-	ISL88012IH523Z	Vdet-IC	2.32V -Reset/-MR, +Reset PPO	SOT-23-5	28vd4	-	6a	Isl
AHK	-	XC6211C18AMR	LVR-IC	LDO, 1.85V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHK	-	XC6501C18AMR-G	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHK	ec	XC6114D318MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHK	ej	XC6114D348MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHL	-	ISL88012IH522Z	Vdet-IC	2.19V -Reset/-MR, +Reset PPO	SOT-23-5	28vd4	-	6a	Isl
AHL	-	XC6211C19AMR	LVR-IC	LDO, 1.95V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHL	-	XC6501C19AMR-G	LVR-IC	LDO, 1.95V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHL	ec	XC6114D319MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AHL	ej	XC6114D349MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHM	-	ISL88013IH546Z	Vdet-IC	4.64V -Reset/-MR, +Reset PPO	SOT-23-5	28vd5	-	6a	Isl
AHM	-	XC6211C20AMR	LVR-IC	LDO, 2.05V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHM	-	XC6501C20AMR-G	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHM	ec	XC6114D320MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHM	ej	XC6114D350MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHN	-	ISL88013IH544Z	Vdet-IC	4.38V -Reset/-MR, +Reset PPO	SOT-23-5	28vd5	-	6a	Isl
AHN	-	XC6211C21AMR	LVR-IC	LDO, 2.15V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHN	-	XC6501C21AMR-G	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHN	ec	XC6114D321MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHO	-	ISL88013IH531Z	Vdet-IC	3.09V -Reset/-MR, +Reset PPO	SOT-23-5	28vd5	-	6a	Isl
AHP	-	ISL88013IH529Z	Vdet-IC	2.92V -Reset/-MR, +Reset PPO	SOT-23-5	28vd5	-	6a	Isl
AHP	-	XC6211C22AMR	LVR-IC	LDO, 2.25V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHP	-	XC6501C22AMR-G	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHP	ec	XC6114D322MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHQ	-	AME8800KEEV	LVR-IC	LDO, 3.7V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
AHQ	-	AME8800KEEVL	LVR-IC	LDO, 3.7V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AHQ	-	ISL88013IH526Z	Vdet-IC	2.63V -Reset/-MR, +Reset PPO	SOT-23-5	28vd5	-	6a	Isl
AHQ	eh	AME8800KEEVY	LVR-IC	LDO, 3.7V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AHQ	eh	AME8800KEEVZ	LVR-IC	LDO, 3.7V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
AHR	-	ISL88013IH523Z	Vdet-IC	2.32V -Reset/-MR, +Reset PPO	SOT-23-5	28vd5	-	6a	Isl
AHR	-	XC6211C23AMR	LVR-IC	LDO, 2.35V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHR	-	XC6501C23AMR-G	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHR	ec	XC6114D323MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHS	-	ISL88013IH522Z	Vdet-IC	2.19V -Reset/-MR, +Reset PPO	SOT-23-5	28vd5	-	6a	Isl
AHS	-	XC6211C24AMR	LVR-IC	LDO, 2.45V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHS	-	XC6501C24AMR-G	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHS	ec	XC6114D324MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHT	-	ISL88014IH5Z	Vdet-IC	Adj, int. Voltage Detector, -Reset/-MR ODO	SOT-23-5	28vd6	-	6a	Isl
AHT	-	XC6211C25AMR	LVR-IC	LDO, 2.55V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHT	-	XC6501C25AMR-G	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHT	ec	XC6114D325MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHU	-	ISL88015IH5Z	Vdet-IC	Adj, int. Voltage Detector, -Reset/-MR ODO	SOT-23-5	28vd7	-	6a	Isl
AHU	-	XC6211C26AMR	LVR-IC	LDO, 2.65V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHU	-	XC6501C26AMR-G	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHU	ec	XC6114D326MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHV	-	XC6211C27AMR	LVR-IC	LDO, 2.75V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHV	-	XC6501C27AMR-G	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHV	ec	XC6114D327MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHX	-	XC6211C28AMR	LVR-IC	LDO, 2.85V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHX	-	XC6501C28AMR-G	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHX	ec	XC6114D328MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHY	-	XC6211C29AMR	LVR-IC	LDO, 2.95V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHY	-	XC6501C29AMR-G	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHY	ec	XC6114D329MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AHZ	-	XC6211C30AMR	LVR-IC	LDO, 3.05V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AHZ	-	XC6501C30AMR-G	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AHZ	ec	XC6114D330MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AI	-	MAX823LEUK	Vdet-IC	4.63V±1.5%, -MR, Strobe, -Reset PPO	SOT-23-5	28cp	VD17	6k	Max
AI	-	SiP824LEU	Vdet-IC	4.63V±1.5%, Strobe, ±Reset PPO	SOT-23-5	28xq	-	6k	Vs
AJ	-	MAX823MEUK	Vdet-IC	4.38V±1.5%, -MR, Strobe, -Reset PPO	SOT-23-5	28cp	VD17	6k	Max
AJ	-	RN5RT28AA	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
AJ-	-	RT9198-31PU5	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SC-70-5	28xm	VR4	6a	Rct
AJ01	-	R3118Q062A	Vdet-IC	0.6V±22.5mV, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ02	-	R3118Q072A	Vdet-IC	0.7V±22.5mV, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ03	-	R3118Q082A	Vdet-IC	0.8V±22.5mV, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ04	-	R3118Q092A	Vdet-IC	0.9V±22.5mV, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ05	-	R3118Q102A	Vdet-IC	1.0V±22.5mV, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ06	-	R3118Q112A	Vdet-IC	1.1V±22.5mV, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ07	-	R3118Q122A	Vdet-IC	1.2V±22.5mV, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ08	-	R3118Q132A	Vdet-IC	1.3V±22.5mV, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ09	-	R3118Q142A	Vdet-IC	1.4V±22.5mV, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ10	-	R3118Q152A	Vdet-IC	1.5V±22.5mV, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ11	-	R3118Q162A	Vdet-IC	1.6V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ12	-	R3118Q172A	Vdet-IC	1.7V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ13	-	R3118Q182A	Vdet-IC	1.8V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ14	-	R3118Q192A	Vdet-IC	1.9V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ15	-	R3118Q202A	Vdet-IC	2.0V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ16	-	R3118Q212A	Vdet-IC	2.1V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ17	-	R3118Q222A	Vdet-IC	2.2V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AJ18	-	R3118Q232A	Vdet-IC	2.3V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ19	-	R3118Q242A	Vdet-IC	2.4V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ20	-	R3118Q252A	Vdet-IC	2.5V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ21	-	R3118Q262A	Vdet-IC	2.6V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ22	-	R3118Q272A	Vdet-IC	2.7V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ23	-	R3118Q282A	Vdet-IC	2.8V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ24	-	R3118Q292A	Vdet-IC	2.9V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ25	-	R3118Q302A	Vdet-IC	3.0V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ26	-	R3118Q312A	Vdet-IC	3.1V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ27	-	R3118Q322A	Vdet-IC	3.2V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ28	-	R3118Q332A	Vdet-IC	3.3V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ29	-	R3118Q342A	Vdet-IC	3.4V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ30	-	R3118Q352A	Vdet-IC	3.5V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ31	-	R3118Q362A	Vdet-IC	3.6V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ32	-	R3118Q372A	Vdet-IC	3.7V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ33	-	R3118Q382A	Vdet-IC	3.8V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ34	-	R3118Q392A	Vdet-IC	3.9V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ35	-	R3118Q402A	Vdet-IC	4.0V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ36	-	R3118Q412A	Vdet-IC	4.1V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ37	-	R3118Q422A	Vdet-IC	4.2V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ38	-	R3118Q432A	Vdet-IC	4.3V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ39	-	R3118Q442A	Vdet-IC	4.4V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ40	-	R3118Q452A	Vdet-IC	4.5V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ41	-	R3118Q462A	Vdet-IC	4.6V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ42	-	R3118Q472A	Vdet-IC	4.7V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ43	-	R3118Q482A	Vdet-IC	4.8V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ44	-	R3118Q492A	Vdet-IC	4.9V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJ45	-	R3118Q502A	Vdet-IC	5.0V±1.5%, -Reset ODO, Sense	SC-88A	28z5	VD14	6ma	Ric
AJE3	-	FAN2512S33X	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6b	F
AJU	-	AME8800LEEV	LVR-IC	LDO, 1.5V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
AJU	-	AME8800LEEVL	LVR-IC	LDO, 1.5V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AJU	eh	AME8800LEEVY	LVR-IC	LDO, 1.5V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AJU	eh	AME8800LEEVZ	LVR-IC	LDO, 1.5V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
AJV	-	AME8800MEEV	LVR-IC	LDO, 1.8V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
AJV	-	AME8800MEEVL	LVR-IC	LDO, 1.8V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AJV	eh	AME8800MEEVY	LVR-IC	LDO, 1.8V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AJV	eh	AME8800MEEVZ	LVR-IC	LDO, 1.8V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
Ak	-	BD48E31G	Vdet-IC	3.1V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
AK	-	AAT3221IGV-2.5	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
AK	-	MAX823TEUK	Vdet-IC	3.08V±1.5%, -MR, Strobe, -Reset PPO	SOT-23-5	28cp	VD17	6k	Max
AK	-	RN5RT29AA	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
AK	-	SiP824MEU	Vdet-IC	4.38V±1.5%, Strobe, ±Reset PPO	SOT-23-5	28xq	-	6k	Vs
AK-	-	RT9198-25PU5R	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6a	Rct
AK0	ej	XC6114D431MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AK01	-	R3118Q062C	Vdet-IC	0.6V±22.5mV, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK02	-	R3118Q072C	Vdet-IC	0.7V±22.5mV, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK03	-	R3118Q082C	Vdet-IC	0.8V±22.5mV, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK04	-	R3118Q092C	Vdet-IC	0.9V±22.5mV, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK05	-	R3118Q102C	Vdet-IC	1.0V±22.5mV, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK06	-	R3118Q112C	Vdet-IC	1.1V±22.5mV, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK07	-	R3118Q122C	Vdet-IC	1.2V±22.5mV, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK08	-	R3118Q132C	Vdet-IC	1.3V±22.5mV, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK09	-	R3118Q142C	Vdet-IC	1.4V±22.5mV, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK1	ej	XC6114D432MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AK10	-	R3118Q152C	Vdet-IC	1.5V±22.5mV, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK11	-	R3118Q162C	Vdet-IC	1.6V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK12	-	R3118Q172C	Vdet-IC	1.7V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK13	-	R3118Q182C	Vdet-IC	1.8V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK14	-	R3118Q192C	Vdet-IC	1.9V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK15	-	R3118Q202C	Vdet-IC	2.0V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK16	-	R3118Q212C	Vdet-IC	2.1V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK17	-	R3118Q222C	Vdet-IC	2.2V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK18	-	R3118Q232C	Vdet-IC	2.3V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK19	-	R3118Q242C	Vdet-IC	2.4V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK2	ej	XC6114D433MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AK20	-	R3118Q252C	Vdet-IC	2.5V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK21	-	R3118Q262C	Vdet-IC	2.6V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK22	-	R3118Q272C	Vdet-IC	2.7V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK23	-	R3118Q282C	Vdet-IC	2.7V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK24	-	R3118Q292C	Vdet-IC	2.8V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AK25	-	R3118Q302C	Vdet-IC	3.9V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK26	-	R3118Q312C	Vdet-IC	3.1V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK27	-	R3118Q322C	Vdet-IC	3.2V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK28	-	R3118Q332C	Vdet-IC	3.3V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK29	-	R3118Q342C	Vdet-IC	3.4V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK3	ej	XC6114D434MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AK30	-	R3118Q352C	Vdet-IC	3.5V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK31	-	R3118Q362C	Vdet-IC	3.6V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK32	-	R3118Q372C	Vdet-IC	3.7V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK33	-	R3118Q382C	Vdet-IC	3.8V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK34	-	R3118Q392C	Vdet-IC	3.9V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK35	-	R3118Q402C	Vdet-IC	4.0V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK36	-	R3118Q412C	Vdet-IC	4.1V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK37	-	R3118Q422C	Vdet-IC	4.2V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK38	-	R3118Q432C	Vdet-IC	4.3V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK39	-	R3118Q442C	Vdet-IC	4.4V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK4	ej	XC6114D435MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AK40	-	R3118Q452C	Vdet-IC	4.5V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK41	-	R3118Q462C	Vdet-IC	4.6V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK42	-	R3118Q472C	Vdet-IC	4.7V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK43	-	R3118Q482C	Vdet-IC	4.8V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK44	-	R3118Q492C	Vdet-IC	4.9V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK45	-	R3118Q502C	Vdet-IC	5.0V±1.5%, -Reset PPO, Sense	SC-88A	28z5	VD15	6ma	Ric
AK5	ej	XC6114D436MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AK6	ej	XC6114D437MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AK7	ej	XC6114D438MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AK8	-	XC6211D09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AK8	ej	XC6114D439MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AK9	-	XC6211D10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AK9	ej	XC6114D440MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKA	-	XC6211D11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKA	ej	XC6114D441MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKB	-	XC6211D12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKB	-	XC6501D12AMR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKB	ej	XC6114D442MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKC	-	XC6211D13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKC	-	XC6501D13AMR-G	LVR-IC	LDO, 1.35V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKC	ej	XC6114D443MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKD	-	XC6211D14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKD	-	XC6501D14AMR-G	LVR-IC	LDO, 1.45V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKD	ej	XC6114D444MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKE	-	XC6211D15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKE	-	XC6501D15AMR-G	LVR-IC	LDO, 1.55V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKE	ej	XC6114D445MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKF	-	XC6211D16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKF	-	XC6501D16AMR-G	LVR-IC	LDO, 1.65V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKF	ec	XC6114D416MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKF	ej	XC6114D446MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKH	-	XC6211D17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKH	-	XC6501D17AMR-G	LVR-IC	LDO, 1.75V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKH	ec	XC6114D417MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKH	ej	XC6114D447MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKI	-	AME8800NEEV	LVR-IC	LDO, 2.9V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
AKI	-	AME8800NEEVL	LVR-IC	LDO, 2.9V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AKI	eh	AME8800NEEVY	LVR-IC	LDO, 2.9V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AKI	eh	AME8800NEEVZ	LVR-IC	LDO, 2.9V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
AKJ	-	AME8800OEEV	LVR-IC	LDO, 3.1V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
AKJ	-	AME8800OEEVL	LVR-IC	LDO, 3.1V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AKJ	eh	AME8800OEEVY	LVR-IC	LDO, 3.1V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AKJ	eh	AME8800OEEVZ	LVR-IC	LDO, 3.1V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
AKK	-	XC6211D18AMR	LVR-IC	LDO, 1.85V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKK	-	XC6501D18AMR-G	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKK	ec	XC6114D418MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKK	ej	XC6114D448MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKL	-	XC6211D19AMR	LVR-IC	LDO, 1.95V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKL	-	XC6501D19AMR-G	LVR-IC	LDO, 1.95V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKL	ec	XC6114D419MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKL	ej	XC6114D449MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKM	-	XC6211D20AMR	LVR-IC	LDO, 2.05V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKM	-	XC6501D20AMR-G	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AKM	ec	XC6114D420MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKM	ej	XC6114D450MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKN	-	XC6211D21AMR	LVR-IC	LDO, 2.15V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKN	-	XC6501D21AMR-G	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKN	ec	XC6114D421MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKP	-	XC6211D22AMR	LVR-IC	LDO, 2.25V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKP	-	XC6501D22AMR-G	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKP	ec	XC6114D422MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKR	-	XC6211D23AMR	LVR-IC	LDO, 2.35V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKR	-	XC6501D23AMR-G	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKR	ec	XC6114D423MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKS	-	XC6211D24AMR	LVR-IC	LDO, 2.45V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKS	-	XC6501D24AMR-G	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKS	ec	XC6114D424MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKT	-	XC6211D25AMR	LVR-IC	LDO, 2.55V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKT	-	XC6501D25AMR-G	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKT	ec	XC6114D425MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKU	-	XC6211D26AMR	LVR-IC	LDO, 2.65V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKU	-	XC6501D26AMR-G	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKU	ec	XC6114D426MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKV	-	XC6211D27AMR	LVR-IC	LDO, 2.75V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKV	-	XC6501D27AMR-G	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKV	ec	XC6114D427MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKX	-	XC6211D28AMR	LVR-IC	LDO, 2.85V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKX	-	XC6501D28AMR-G	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKX	ec	XC6114D428MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKY	-	XC6211D29AMR	LVR-IC	LDO, 2.95V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKY	-	XC6501D29AMR-G	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKY	ec	XC6114D429MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AKZ	-	XC6211D30AMR	LVR-IC	LDO, 3.05V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AKZ	-	XC6501D30AMR-G	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AKZ	ec	XC6114D430MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AL	-	74AHC1G66GW	CMOS-Log	Single-pole single-throw analog switch	SOT-353	28	Log16	6a	Nxp
AL	-	AAT3221IGV-3.0	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
AL	-	MAX823SEUK	Vdet-IC	2.93V±1.5%, -MR, Strobe, -Reset PPO	SOT-23-5	28cp	VD17	6k	Max
AL	-	R1112N201A	LVR-IC	LDO, Low noise, 2.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
AL	-	SiP824TEU	Vdet-IC	3.08V±1.5%, Strobe, ±Reset PPO	SOT-23-5	28xq	-	6k	Vs
AL-	-	RT9193-35PU5	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
AL0	-	XC6211A31AMR	LVR-IC	LDO, 3.15V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AL0	ej	XC6114D531MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AL01	-	R3117Q074A	Vdet-IC	0.7V±15mV, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL02	-	R3117Q084A	Vdet-IC	0.8V±15mV, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL03	-	R3117Q094A	Vdet-IC	0.9V±15mV, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL04	-	R3117Q104A	Vdet-IC	1.0V±15mV, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL05	-	R3117Q114A	Vdet-IC	1.1V±15mV, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL06	-	R3117Q124A	Vdet-IC	1.2V±15mV, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL07	-	R3117Q134A	Vdet-IC	1.3V±15mV, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL08	-	R3117Q144A	Vdet-IC	1.4V±15mV, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL09	-	R3117Q154A	Vdet-IC	1.5V±15mV, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL1	-	XC6211A32AMR	LVR-IC	LDO, 3.25V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AL1	ej	XC6114D532MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AL10	-	R3117Q164A	Vdet-IC	1.6V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL11	-	R3117Q174A	Vdet-IC	1.7V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL12	-	R3117Q184A	Vdet-IC	1.8V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL13	-	R3117Q194A	Vdet-IC	1.9V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL14	-	R3117Q204A	Vdet-IC	2.0V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL15	-	R3117Q214A	Vdet-IC	2.1V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL16	-	R3117Q224A	Vdet-IC	2.2V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL17	-	R3117Q234A	Vdet-IC	2.3V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL18	-	R3117Q244A	Vdet-IC	2.4V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL19	-	R3117Q254A	Vdet-IC	2.5V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL2	-	XC6211A33AMR	LVR-IC	LDO, 3.35V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AL2	ej	XC6114D533MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AL20	-	R3117Q264A	Vdet-IC	2.6V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL21	-	R3117Q274A	Vdet-IC	2.7V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL22	-	R3117Q284A	Vdet-IC	2.8V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL23	-	R3117Q294A	Vdet-IC	2.9V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL24	-	R3117Q304A	Vdet-IC	3.0V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL25	-	R3117Q314A	Vdet-IC	3.1V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL26	-	R3117Q324A	Vdet-IC	3.2V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AL27	-	R3117Q334A	Vdet-IC	3.3V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL28	-	R3117Q344A	Vdet-IC	3.4V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL29	-	R3117Q354A	Vdet-IC	3.5V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL3	-	XC6211A34AMR	LVR-IC	LDO, 3.45V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AL3	ej	XC6114D534MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AL30	-	R3117Q364A	Vdet-IC	3.6V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL31	-	R3117Q374A	Vdet-IC	3.7V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL32	-	R3117Q384A	Vdet-IC	3.8V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL33	-	R3117Q394A	Vdet-IC	3.9V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL34	-	R3117Q404A	Vdet-IC	4.0V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL35	-	R3117Q414A	Vdet-IC	4.1V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL36	-	R3117Q424A	Vdet-IC	4.2V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL37	-	R3117Q434A	Vdet-IC	4.3V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL38	-	R3117Q444A	Vdet-IC	4.4V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL39	-	R3117Q454A	Vdet-IC	4.5V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL4	-	XC6211A35AMR	LVR-IC	LDO, 3.55V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AL4	ej	XC6114D535MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AL40	-	R3117Q464A	Vdet-IC	4.6V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL41	-	R3117Q474A	Vdet-IC	4.7V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL42	-	R3117Q484A	Vdet-IC	4.8V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL43	-	R3117Q494A	Vdet-IC	4.9V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL44	-	R3117Q504A	Vdet-IC	5.0V±1%, -Reset ODO, Sense	SC-88A	28rs	VD11	6ma	Ric
AL5	-	XC6211A36AMR	LVR-IC	LDO, 3.65V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AL5	ej	XC6114D536MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AL6	-	XC6211A37AMR	LVR-IC	LDO, 3.75V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AL6	ej	XC6114D537MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AL7	-	XC6211A38AMR	LVR-IC	LDO, 3.85V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AL7	ej	XC6114D538MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AL8	-	XC6211A39AMR	LVR-IC	LDO, 3.95V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AL8	ej	XC6114D539MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AL9	-	XC6211A40AMR	LVR-IC	LDO, 4.05V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AL9	ej	XC6114D540MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALA	-	XC6211A41AMR	LVR-IC	LDO, 4.15V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
ALA	ej	XC6114D541MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALB	-	XC6211A42AMR	LVR-IC	LDO, 4.25V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
ALB	ej	XC6114D542MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALC	-	XC6211A43AMR	LVR-IC	LDO, 4.35V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
ALC	ej	XC6114D543MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALD	-	XC6211A44AMR	LVR-IC	LDO, 4.45V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
ALD	ej	XC6114D544MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALE	-	XC6211A45AMR	LVR-IC	LDO, 4.55V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
ALE	ej	XC6114D545MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALF	-	XC6211A46AMR	LVR-IC	LDO, 4.65V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
ALF	ec	XC6114D516MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALF	ej	XC6114D546MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALH	-	XC6211A47AMR	LVR-IC	LDO, 4.75V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
ALH	ec	XC6114D517MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALH	ej	XC6114D547MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALK	-	XC6211A48AMR	LVR-IC	LDO, 4.85V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
ALK	ec	XC6114D518MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALK	ej	XC6114D548MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALL	-	XC6211A49AMR	LVR-IC	LDO, 4.95V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
ALL	ec	XC6114D519MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALL	ej	XC6114D549MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALM	ec	XC6114D520MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALM	ej	XC6114D550MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALN	-	TPS62220DDC	DC-DC-IC	PWM step-down, Adjustable, 1.2..2.5V, 400mA, 1.25MHz	SOT-23-5	28yj	-	6k	Ti
ALN	ec	XC6114D521MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALO	-	TPS62221DDC	DC-DC-IC	PWM step-down, 1.5V, 400mA, 1.25MHz	SOT-23-5	28yj	-	6k	Ti
ALP	ec	XC6114D522MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALQ	-	TPS62224DDC	DC-DC-IC	PWM step-down, 1.6V, 400mA, 1.25MHz	SOT-23-5	28yj	-	6k	Ti
ALR	ec	XC6114D523MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALS	ec	XC6114D524MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALT	ec	XC6114D525MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALU	ec	XC6114D526MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALV	ec	XC6114D527MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALX	-	TPS62223DDC	DC-DC-IC	PWM step-down, 2.3V, 400mA, 1.25MHz	SOT-23-5	28yj	-	6k	Ti
ALX	ec	XC6114D528MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALY	ec	XC6114D529MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
ALZ	ec	XC6114D530MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Am	-	BD48E32G	Vdet-IC	3.2V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
AM	-	74AHC1G125GW	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log14	6a	Nxp
AM	-	AAT3221IGV-3.3	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
AM	-	MAX823REUK	Vdet-IC	2.63V±1.5%, -MR, Strobe, -Reset PPO	SOT-23-5	28cp	VD17	6k	Max
AM	-	R1112N211A	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
AM	-	SiP824SEU	Vdet-IC	2.93V±1.5%, Strobe, ±Reset PPO	SOT-23-5	28xq	-	6k	Vs
AM-	-	RT9193-1HPU5	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
AM0	-	XC6211B31AMR	LVR-IC	LDO, 3.15V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AM0	-	XC6501A31AMR-G	LVR-IC	LDO, 3.15V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AM0	ej	XC6114D631MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AM01	-	R3117Q074C	Vdet-IC	0.7V±15mV, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM02	-	R3117Q084C	Vdet-IC	0.8V±15mV, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM03	-	R3117Q094C	Vdet-IC	0.9V±15mV, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM04	-	R3117Q104C	Vdet-IC	1.0V±15mV, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM05	-	R3117Q114C	Vdet-IC	1.1V±15mV, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM06	-	R3117Q124C	Vdet-IC	1.2V±15mV, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM07	-	R3117Q134C	Vdet-IC	1.3V±15mV, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM08	-	R3117Q144C	Vdet-IC	1.4V±15mV, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM09	-	R3117Q154C	Vdet-IC	1.5V±15mV, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM1	-	XC6211B32AMR	LVR-IC	LDO, 3.25V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AM1	-	XC6501A32AMR-G	LVR-IC	LDO, 3.25V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AM1	ej	XC6114D632MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AM10	-	R3117Q164C	Vdet-IC	1.6V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM11	-	R3117Q174C	Vdet-IC	1.7V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM12	-	R3117Q184C	Vdet-IC	1.8V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM13	-	R3117Q194C	Vdet-IC	1.9V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM14	-	R3117Q204C	Vdet-IC	2.0V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM15	-	R3117Q214C	Vdet-IC	2.1V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM16	-	R3117Q224C	Vdet-IC	2.2V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM17	-	R3117Q234C	Vdet-IC	2.3V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM18	-	R3117Q244C	Vdet-IC	2.4V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM19	-	R3117Q254C	Vdet-IC	2.5V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM2	-	XC6211B33AMR	LVR-IC	LDO, 3.35V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AM2	-	XC6501A33AMR-G	LVR-IC	LDO, 3.35V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AM2	ej	XC6114D633MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AM20	-	R3117Q264C	Vdet-IC	2.6V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM21	-	R3117Q274C	Vdet-IC	2.7V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM22	-	R3117Q284C	Vdet-IC	2.8V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM23	-	R3117Q294C	Vdet-IC	2.9V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM24	-	R3117Q304C	Vdet-IC	3.0V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM25	-	R3117Q314C	Vdet-IC	3.1V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM26	-	R3117Q324C	Vdet-IC	3.2V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM27	-	R3117Q334C	Vdet-IC	3.3V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM28	-	R3117Q344C	Vdet-IC	3.4V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM29	-	R3117Q354C	Vdet-IC	3.5V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM3	-	XC6211B34AMR	LVR-IC	LDO, 3.45V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AM3	-	XC6501A34AMR-G	LVR-IC	LDO, 3.45V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AM3	ej	XC6114D634MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AM30	-	R3117Q364C	Vdet-IC	3.6V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM31	-	R3117Q374C	Vdet-IC	3.7V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM32	-	R3117Q384C	Vdet-IC	3.8V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM33	-	R3117Q394C	Vdet-IC	3.9V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM34	-	R3117Q404C	Vdet-IC	4.0V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM35	-	R3117Q414C	Vdet-IC	4.1V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM36	-	R3117Q424C	Vdet-IC	4.2V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM37	-	R3117Q434C	Vdet-IC	4.3V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM38	-	R3117Q444C	Vdet-IC	4.4V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM39	-	R3117Q454C	Vdet-IC	4.5V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM4	-	XC6211B35AMR	LVR-IC	LDO, 3.55V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AM4	-	XC6501A35AMR-G	LVR-IC	LDO, 3.55V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AM4	ej	XC6114D635MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AM40	-	R3117Q464C	Vdet-IC	4.6V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM41	-	R3117Q474C	Vdet-IC	4.7V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM42	-	R3117Q484C	Vdet-IC	4.8V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM43	-	R3117Q494C	Vdet-IC	4.9V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM44	-	R3117Q504C	Vdet-IC	5.0V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
AM5	-	XC6211B36AMR	LVR-IC	LDO, 3.65V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AM5	-	XC6501A36AMR-G	LVR-IC	LDO, 3.65V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AM5	ej	XC6114D636MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AM6	-	XC6211B37AMR	LVR-IC	LDO, 3.75V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AM6	-	XC6501A37AMR-G	LVR-IC	LDO, 3.75V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AM6	ej	XC6114D637MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AM7	-	XC6211B38AMR	LVR-IC	LDO, 3.85V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AM7	-	XC6501A38AMR-G	LVR-IC	LDO, 3.85V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AM7	ej	XC6114D638MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AM8	-	XC6211B39AMR	LVR-IC	LDO, 3.95V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AM8	-	XC6501A39AMR-G	LVR-IC	LDO, 3.95V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AM8	ej	XC6114D639MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AM9	-	XC6211B40AMR	LVR-IC	LDO, 4.05V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AM9	-	XC6501A40AMR-G	LVR-IC	LDO, 4.05V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AM9	ej	XC6114D640MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMA	-	XC6211B41AMR	LVR-IC	LDO, 4.15V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AMA	-	XC6501A41AMR-G	LVR-IC	LDO, 4.15V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AMA	ej	XC6114D641MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMB	-	XC6211B42AMR	LVR-IC	LDO, 4.25V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AMB	-	XC6501A42AMR-G	LVR-IC	LDO, 4.25V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AMB	ej	XC6114D642MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMC	-	XC6211B43AMR	LVR-IC	LDO, 4.35V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AMC	-	XC6501A43AMR-G	LVR-IC	LDO, 4.35V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AMC	ej	XC6114D643MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMD	-	XC6211B44AMR	LVR-IC	LDO, 4.45V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AMD	-	XC6501A44AMR-G	LVR-IC	LDO, 4.45V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AMD	ej	XC6114D644MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AME	-	XC6211B45AMR	LVR-IC	LDO, 4.55V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AME	-	XC6501A45AMR-G	LVR-IC	LDO, 4.55V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AME	ej	XC6114D645MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMF	-	XC6211B46AMR	LVR-IC	LDO, 4.65V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AMF	-	XC6501A46AMR-G	LVR-IC	LDO, 4.65V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AMF	ec	XC6114D616MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMF	ej	XC6114D646MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMH	-	XC6211B47AMR	LVR-IC	LDO, 4.75V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AMH	-	XC6501A47AMR-G	LVR-IC	LDO, 4.75V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AMH	ec	XC6114D617MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMH	ej	XC6114D647MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMK	-	XC6211B48AMR	LVR-IC	LDO, 4.85V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AMK	-	XC6501A48AMR-G	LVR-IC	LDO, 4.85V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AMK	ec	XC6114D618MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMK	ej	XC6114D648MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AML	-	XC6211B49AMR	LVR-IC	LDO, 4.95V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AML	-	XC6501A49AMR-G	LVR-IC	LDO, 4.95V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AML	ec	XC6114D619MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AML	ej	XC6114D649MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMM	ec	XC6114D620MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMM	ej	XC6114D650MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMN	ec	XC6114D621MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMP	ec	XC6114D622MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMR	ec	XC6114D623MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMS	ec	XC6114D624MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMT	ec	XC6114D625MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMU	ec	XC6114D626MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMV	ec	XC6114D627MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMX	ec	XC6114D628MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMY	ec	XC6114D629MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
AMZ	ec	XC6114D630MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD19	6g	Tor
aN	-	74AUP1G34GW	CMOS-Log	Noninverting buffer	SOT-353-1	28	Log10	6a	Nxp
An	-	BD48E33G	Vdet-IC	3.3V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
AN	-	74AHC1G126GW	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log13	6a	Nxp
AN	-	MAX824LEUK	Vdet-IC	4.63V±1.5%, Strobe, ±Reset PPO	SOT-23-5	28xq	-	6k	Max
AN	-	R1112N221A	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
AN	-	SiP824REU	Vdet-IC	2.63V±1.5%, Strobe, ±Reset PPO	SOT-23-5	28xq	-	6k	Vs
AN-	-	RT9193-27PU5	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
AN0	-	XC6211C31AMR	LVR-IC	LDO, 3.15V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AN0	-	XC6501B31AMR-G	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AN08	-	RP110Q082B	LVR-IC	LDO, 0.8V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN09	-	RP110Q092B	LVR-IC	LDO, 0.9V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN1	-	XC6211C32AMR	LVR-IC	LDO, 3.25V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AN1	-	XC6501B32AMR-G	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AN10	-	RP110Q102B	LVR-IC	LDO, 1.0V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN11	-	RP110Q112B	LVR-IC	LDO, 1.1V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN12	-	RP110Q122B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AN13	-	RP110Q132B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN14	-	RP110Q142B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN15	-	RP110Q152B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN16	-	RP110Q162B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN17	-	RP110Q172B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN18	-	RP110Q182B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN19	-	RP110Q192B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN2	-	XC6211C33AMR	LVR-IC	LDO, 3.35V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AN2	-	XC6501B33AMR-G	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AN20	-	RP110Q202B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN21	-	RP110Q212B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN22	-	RP110Q222B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN23	-	RP110Q232B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN24	-	RP110Q242B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN25	-	RP110Q252B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN26	-	RP110Q262B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN27	-	RP110Q272B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN28	-	RP110Q282B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN29	-	RP110Q292B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN3	-	XC6211C34AMR	LVR-IC	LDO, 3.45V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AN3	-	XC6501B34AMR-G	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AN30	-	RP110Q302B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN31	-	RP110Q312B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN32	-	RP110Q322B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN33	-	RP110Q332B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN34	-	RP110Q342B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN35	-	RP110Q352B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN36	-	RP110Q362B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN37	-	RP110Q122B5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN38	-	RP110Q182B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN39	-	RP110Q282B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SC-88A	28vc	VR4	6ma	Ric
AN4	-	XC6211C35AMR	LVR-IC	LDO, 3.55V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AN4	-	XC6501B35AMR-G	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AN5	-	XC6211C36AMR	LVR-IC	LDO, 3.65V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AN5	-	XC6501B36AMR-G	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AN6	-	XC6211C37AMR	LVR-IC	LDO, 3.75V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AN6	-	XC6501B37AMR-G	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AN7	-	XC6211C38AMR	LVR-IC	LDO, 3.85V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AN7	-	XC6501B38AMR-G	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AN8	-	XC6211C39AMR	LVR-IC	LDO, 3.95V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AN8	-	XC6501B39AMR-G	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AN9	-	XC6211C40AMR	LVR-IC	LDO, 4.05V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AN9	-	XC6501B40AMR-G	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ANA	-	XC6211C41AMR	LVR-IC	LDO, 4.15V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ANA	-	XC6501B41AMR-G	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ANB	-	XC6211C42AMR	LVR-IC	LDO, 4.25V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ANB	-	XC6501B42AMR-G	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ANC	-	XC6211C43AMR	LVR-IC	LDO, 4.35V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ANC	-	XC6501B43AMR-G	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AND	-	XC6211C44AMR	LVR-IC	LDO, 4.45V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AND	-	XC6501B44AMR-G	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ANE	-	XC6211C45AMR	LVR-IC	LDO, 4.55V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ANE	-	XC6501B45AMR-G	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ANF	-	XC6211C46AMR	LVR-IC	LDO, 4.65V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ANF	-	XC6501B46AMR-G	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ANH	-	XC6211C47AMR	LVR-IC	LDO, 4.75V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ANH	-	XC6501B47AMR-G	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ANK	-	XC6211C48AMR	LVR-IC	LDO, 4.85V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ANK	-	XC6501B48AMR-G	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
ANL	-	XC6211C49AMR	LVR-IC	LDO, 4.95V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
ANL	-	XC6501B49AMR-G	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AO	-	MAX824MEUK	Vdet-IC	4.38V±1.5%, Strobe, ±Reset PPO	SOT-23-5	28xq	-	6k	Max
AO	-	PT7M7811LTA	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR	SOT-23-5	28vd2	VD5	6k	Pti
AO	-	SiP824ZEU	Vdet-IC	2.32V±1.5%, Strobe, ±Reset PPO	SOT-23-5	28xq	-	6k	Vs
AO	ea	PT7M7811LTAE	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR, Lead free	SOT-23-5	28vd2	VD5	6k	Pti
Ap	-	BD48E34G	Vdet-IC	3.4V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
AP	-	74AHC1G79GW	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT-353	28	Log20	6a	Nxp
AP	-	MAX824TEUK	Vdet-IC	3.08V±1.5%, Strobe, ±Reset PPO	SOT-23-5	28xq	-	6k	Max
AP	-	PT7M7811MTA	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR	SOT-23-5	28vd2	VD5	6k	Pti
AP	-	R1112N231A	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AP	-	SiP824YEU	Vdet-IC	2.19V±1.5%, Strobe, ±Reset PPO	SOT-23-5	28xq	-	6k	Vs
AP	ea	PT7M7811MTAE	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR, Lead free	SOT-23-5	28vd2	VD5	6k	Pti
AP0	-	XC6211D31AMR	LVR-IC	LDO, 3.15V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AP0	ej	XC6114E431MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AP08	-	RP110Q082C	LVR-IC	LDO, 0.8V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP09	-	RP110Q092C	LVR-IC	LDO, 0.9V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP1	-	XC6211D32AMR	LVR-IC	LDO, 3.25V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AP1	ej	XC6114E432MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AP10	-	RP110Q102C	LVR-IC	LDO, 1.0V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP11	-	RP110Q112C	LVR-IC	LDO, 1.1V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP12	-	RP110Q122C	LVR-IC	LDO, 1.2V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP13	-	RP110Q132C	LVR-IC	LDO, 1.3V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP14	-	RP110Q142C	LVR-IC	LDO, 1.4V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP15	-	RP110Q152C	LVR-IC	LDO, 1.5V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP16	-	RP110Q162C	LVR-IC	LDO, 1.6V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP17	-	RP110Q172C	LVR-IC	LDO, 1.7V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP18	-	RP110Q182C	LVR-IC	LDO, 1.8V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP19	-	RP110Q192C	LVR-IC	LDO, 1.9V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP2	-	XC6211D33AMR	LVR-IC	LDO, 3.35V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AP2	ej	XC6114E433MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AP20	-	RP110Q202C	LVR-IC	LDO, 2.0V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP21	-	RP110Q212C	LVR-IC	LDO, 2.1V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP22	-	RP110Q222C	LVR-IC	LDO, 2.2V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP23	-	RP110Q232C	LVR-IC	LDO, 2.3V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP24	-	RP110Q242C	LVR-IC	LDO, 2.4V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP25	-	RP110Q252C	LVR-IC	LDO, 2.5V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP26	-	RP110Q262C	LVR-IC	LDO, 2.6V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP27	-	RP110Q272C	LVR-IC	LDO, 2.7V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP28	-	RP110Q282C	LVR-IC	LDO, 2.8V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP29	-	RP110Q292C	LVR-IC	LDO, 2.9V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP3	-	XC6211D34AMR	LVR-IC	LDO, 3.45V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AP3	ej	XC6114E434MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AP30	-	RP110Q302C	LVR-IC	LDO, 3.0V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP31	-	RP110Q312C	LVR-IC	LDO, 3.1V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP32	-	RP110Q322C	LVR-IC	LDO, 3.2V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP33	-	RP110Q332C	LVR-IC	LDO, 3.3V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP34	-	RP110Q342C	LVR-IC	LDO, 3.4V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP35	-	RP110Q352C	LVR-IC	LDO, 3.5V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP36	-	RP110Q362C	LVR-IC	LDO, 3.6V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP37	-	RP110Q122C5	LVR-IC	LDO, 1.25V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP38	-	RP110Q182C5	LVR-IC	LDO, 1.85V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP39	-	RP110Q282C5	LVR-IC	LDO, 2.85V±1%, 150mA	SC-88A	28y2	VR1	6ma	Ric
AP4	-	XC6211D35AMR	LVR-IC	LDO, 3.55V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AP4	ej	XC6114E435MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AP5	-	XC6211D36AMR	LVR-IC	LDO, 3.65V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AP5	ej	XC6114E436MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AP6	-	XC6211D37AMR	LVR-IC	LDO, 3.75V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AP6	ej	XC6114E437MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AP7	-	XC6211D38AMR	LVR-IC	LDO, 3.85V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AP7	ej	XC6114E438MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AP8	-	XC6211D39AMR	LVR-IC	LDO, 3.95V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AP8	ej	XC6114E439MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AP9	-	XC6211D40AMR	LVR-IC	LDO, 4.05V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AP9	ej	XC6114E440MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APA	-	XC6211D41AMR	LVR-IC	LDO, 4.15V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
APA	ej	XC6114E441MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APB	-	XC6211D42AMR	LVR-IC	LDO, 4.25V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
APB	ej	XC6114E442MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APC	-	XC6211D43AMR	LVR-IC	LDO, 4.35V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
APC	ej	XC6114E443MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APD	-	XC6211D44AMR	LVR-IC	LDO, 4.45V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
APD	ej	XC6114E444MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APE	-	XC6211D45AMR	LVR-IC	LDO, 4.55V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
APE	ej	XC6114E445MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APF	-	XC6211D46AMR	LVR-IC	LDO, 4.65V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
APF	ec	XC6114E416MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APF	ej	XC6114E446MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APH	-	XC6211D47AMR	LVR-IC	LDO, 4.75V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
APH	ec	XC6114E417MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APH	ej	XC6114E447MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
APK	-	XC6211D48AMR	LVR-IC	LDO, 4.85V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
APK	ec	XC6114E418MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APK	ej	XC6114E448MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APL	-	XC6211D49AMR	LVR-IC	LDO, 4.95V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
APL	ec	XC6114E419MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APL	ej	XC6114E449MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APM	ec	XC6114E420MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APM	ej	XC6114E450MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APN	ec	XC6114E421MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APP	-	TPS62222DDC	DC-DC-IC	PWM step-down, 1.8V, 400mA, 1.25MHz	SOT-23-5	28yj	-	6k	Ti
APP	ec	XC6114E422MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APR	ec	XC6114E423MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APS	ec	XC6114E424MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APT	ec	XC6114E425MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APU	ec	XC6114E426MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APV	ec	XC6114E427MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APX	ec	XC6114E428MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APY	ec	XC6114E429MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
APZ	ec	XC6114E430MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AQ	-	AAT3221IGV-2.8	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
AQ	-	MAX824SEUK	Vdet-IC	2.93V±1.5%, Strobe, ±Reset PPO	SOT-23-5	28xq	-	6k	Max
AQ	-	PT7M7811TTA	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR	SOT-23-5	28vd2	VD5	6k	Pti
AQ	-	R1112N241A	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
AQ	ea	PT7M7811TTAE	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR, Lead free	SOT-23-5	28vd2	VD5	6k	Pti
AQ08	-	RP110Q082D	LVR-IC	LDO, 0.8V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ09	-	RP110Q092D	LVR-IC	LDO, 0.9V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ10	-	RP110Q102D	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ11	-	RP110Q112D	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ12	-	RP110Q122D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ13	-	RP110Q132D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ14	-	RP110Q142D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ15	-	RP110Q152D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ16	-	RP110Q162D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ17	-	RP110Q172D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ18	-	RP110Q182D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ19	-	RP110Q192D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ20	-	RP110Q202D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ21	-	RP110Q212D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ22	-	RP110Q222D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ23	-	RP110Q232D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ24	-	RP110Q242D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ25	-	RP110Q252D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ26	-	RP110Q262D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ27	-	RP110Q272D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ28	-	RP110Q282D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ29	-	RP110Q292D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ30	-	RP110Q302D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ31	-	RP110Q312D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ32	-	RP110Q322D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ33	-	RP110Q332D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ34	-	RP110Q342D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ35	-	RP110Q352D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ36	-	RP110Q362D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ37	-	RP110Q122D5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ38	-	RP110Q182D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQ39	-	RP110Q282D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	SC-88A	28vc	VR4	6ma	Ric
AQW	eh	AME8800SEEVY	LVR-IC	LDO, 5.0V±1.5%, 300mA	TSOT-25	28vu	VR1	6k	Ame
AQW	eh	AME8800SEEVZ	LVR-IC	LDO, 5.0V±1.5%, 300mA	SOT-25	28vu	VR1	6k	Ame
aR	-	74AUP1T98GW	CMOS-Log	Configurable gate with voltage-level translator	SOT-353-1	28	Log82	6a	Nxp
Ar	-	BD48E35G	Vdet-IC	3.5V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
AR	-	74AHC1G06GW	CMOS-Log	Inverter (ODO)	SOT-353	28	Log19	6a	Nxp
AR	-	AT1201-50XR	LVR-IC	LDO, LN, +CE, 5V±2%, 150mA	SOT-23-5	28un	VR7	6a	Atr
AR	-	MAX824REUK	Vdet-IC	2.63V±1.5%, Strobe, ±Reset PPO	SOT-23-5	28xq	-	6k	Max
AR	-	PT7M7811STA	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR	SOT-23-5	28vd2	VD5	6k	Pti
AR	-	R1112N251A	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
AR	-	SiP825LEU	Vdet-IC	4.63V±1.5%, MR, ±Reset PPO	SOT-23-5	28xf	VD21	6k	Vs
AR	ea	PT7M7811STAE	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR, Lead free	SOT-23-5	28vd2	VD5	6k	Pti
AR-	-	RT9193-2HPU5	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
AR0	-	XC6501C31AMR-G	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AR0	ej	XC6114E531MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AR01	-	RP173Q122A5	LVR-IC	LDO, 1.25V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR02	-	RP173Q182A5	LVR-IC	LDO, 1.85V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR03	-	RP173Q282A5	LVR-IC	LDO, 2.85V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR1	-	XC6501C32AMR-G	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AR1	ej	XC6114E532MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AR12	-	RP173Q122A	LVR-IC	LDO, 1.2V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR13	-	RP173Q132A	LVR-IC	LDO, 1.3V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR14	-	RP173Q142A	LVR-IC	LDO, 1.4V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR15	-	RP173Q152A	LVR-IC	LDO, 1.5V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR16	-	RP173Q162A	LVR-IC	LDO, 1.6V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR17	-	RP173Q172A	LVR-IC	LDO, 1.7V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR18	-	RP173Q182A	LVR-IC	LDO, 1.8V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR19	-	RP173Q192A	LVR-IC	LDO, 1.9V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR2	-	XC6501C33AMR-G	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AR2	ej	XC6114E533MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AR20	-	RP173Q202A	LVR-IC	LDO, 2.0V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR21	-	RP173Q212A	LVR-IC	LDO, 2.1V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR22	-	RP173Q222A	LVR-IC	LDO, 2.2V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR23	-	RP173Q232A	LVR-IC	LDO, 2.3V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR24	-	RP173Q242A	LVR-IC	LDO, 2.4V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR25	-	RP173Q252A	LVR-IC	LDO, 2.5V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR26	-	RP173Q262A	LVR-IC	LDO, 2.6V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR27	-	RP173Q272A	LVR-IC	LDO, 2.7V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR28	-	RP173Q282A	LVR-IC	LDO, 2.8V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR29	-	RP173Q292A	LVR-IC	LDO, 2.9V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR3	-	XC6501C34AMR-G	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AR3	ej	XC6114E534MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AR30	-	RP173Q302A	LVR-IC	LDO, 3.0V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR31	-	RP173Q312A	LVR-IC	LDO, 3.1V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR32	-	RP173Q322A	LVR-IC	LDO, 3.2V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR33	-	RP173Q332A	LVR-IC	LDO, 3.3V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR34	-	RP173Q342A	LVR-IC	LDO, 3.4V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR35	-	RP173Q352A	LVR-IC	LDO, 3.5V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR36	-	RP173Q362A	LVR-IC	LDO, 3.6V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR37	-	RP173Q372A	LVR-IC	LDO, 3.7V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR38	-	RP173Q382A	LVR-IC	LDO, 3.8V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR39	-	RP173Q392A	LVR-IC	LDO, 3.9V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR4	-	XC6501C35AMR-G	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AR4	ej	XC6114E535MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AR40	-	RP173Q402A	LVR-IC	LDO, 4.0V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR41	-	RP173Q412A	LVR-IC	LDO, 4.1V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR42	-	RP173Q422A	LVR-IC	LDO, 4.2V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR43	-	RP173Q432A	LVR-IC	LDO, 4.3V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR44	-	RP173Q442A	LVR-IC	LDO, 4.4V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR45	-	RP173Q452A	LVR-IC	LDO, 4.5V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR46	-	RP173Q462A	LVR-IC	LDO, 4.6V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR47	-	RP173Q472A	LVR-IC	LDO, 4.7V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR48	-	RP173Q482A	LVR-IC	LDO, 4.8V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR49	-	RP173Q492A	LVR-IC	LDO, 4.9V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR5	-	XC6501C36AMR-G	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AR5	ej	XC6114E536MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AR50	-	RP173Q502A	LVR-IC	LDO, 5.0V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR51	-	RP173Q512A	LVR-IC	LDO, 5.1V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR52	-	RP173Q522A	LVR-IC	LDO, 5.2V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR53	-	RP173Q532A	LVR-IC	LDO, 5.3V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR54	-	RP173Q542A	LVR-IC	LDO, 5.4V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR55	-	RP173Q552A	LVR-IC	LDO, 5.5V±1%, 150mA, -CE	SC-88A	28xm	VR4	6ma	Ric
AR6	-	XC6501C37AMR-G	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AR6	ej	XC6114E537MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AR7	-	XC6501C38AMR-G	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AR7	ej	XC6114E538MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AR8	-	XC6501C39AMR-G	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AR8	ej	XC6114E539MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AR9	-	XC6501C40AMR-G	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AR9	ej	XC6114E540MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARA	-	XC6501C41AMR-G	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ARA	ej	XC6114E541MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARB	-	XC6501C42AMR-G	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ARB	ej	XC6114E542MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARC	-	XC6501C43AMR-G	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ARC	ej	XC6114E543MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARD	-	XC6501C44AMR-G	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ARD	ej	XC6114E544MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARE	-	XC6501C45AMR-G	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ARE	ej	XC6114E545MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARF	-	XC6501C46AMR-G	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ARF	ec	XC6114E516MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARF	ej	XC6114E546MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARH	-	XC6501C47AMR-G	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ARH	ec	XC6114E517MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARH	ej	XC6114E547MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARK	-	XC6501C48AMR-G	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ARK	ec	XC6114E518MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARK	ej	XC6114E548MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARL	-	XC6501C49AMR-G	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
ARL	ec	XC6114E519MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARL	ej	XC6114E549MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARM	ec	XC6114E520MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARM	ej	XC6114E550MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARN	ec	XC6114E521MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARP	ec	XC6114E522MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARR	ec	XC6114E523MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARS	ec	XC6114E524MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ART	ec	XC6114E525MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARU	ec	XC6114E526MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARV	ec	XC6114E527MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARX	-	AME8510AEEVBDD29	Vdet-IC	2.93V±1.5%, -Reset ODO, -MR, Strobe	SOT-23-5	28cp	VD16	6k	Ame
ARX	ec	XC6114E528MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARY	ec	XC6114E529MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ARZ	ec	XC6114E530MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AS	-	74AHC1G07GW	CMOS-Log	Noninverting buffer/driver (ODO)	SOT-353	28	Log8	6a	Nxp
AS	-	MAX825LEUK	Vdet-IC	4.63V±1.5%, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6k	Max
AS	-	PT7M7811RTA	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR	SOT-23-5	28vd2	VD5	6k	Pti
AS	-	R1112N261A	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
AS	-	RT9167-50CB	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
AS	-	SiP825MEU	Vdet-IC	4.38V±1.5%, MR, ±Reset PPO	SOT-23-5	28xf	VD21	6k	Vs
AS	ea	PT7M7811RTAE	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR, Lead free	SOT-23-5	28vd2	VD5	6k	Pti
AS-	-	RT9167-50PB	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
AS-	-	RT9193T-33PU5	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
AS0	-	XC6501D31AMR-G	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AS0	ej	XC6114E631MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AS01	-	RP173Q122B5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS02	-	RP173Q182B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS03	-	RP173Q282B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS1	-	XC6501D32AMR-G	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AS1	ej	XC6114E632MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AS12	-	RP173Q122B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS13	-	RP173Q132B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS14	-	RP173Q142B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS15	-	RP173Q152B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS16	-	RP173Q162B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS17	-	RP173Q172B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS18	-	RP173Q182B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS19	-	RP173Q192B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS2	-	XC6501D33AMR-G	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AS2	ej	XC6114E633MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AS20	-	RP173Q202B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS21	-	RP173Q212B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS22	-	RP173Q222B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS23	-	RP173Q232B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS24	-	RP173Q242B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS25	-	RP173Q252B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS26	-	RP173Q262B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS27	-	RP173Q272B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS28	-	RP173Q282B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS29	-	RP173Q292B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS3	-	XC6501D34AMR-G	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AS3	ej	XC6114E634MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AS30	-	RP173Q302B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS31	-	RP173Q312B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AS32	-	RP173Q322B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS33	-	RP173Q332B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS34	-	RP173Q342B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS35	-	RP173Q352B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS36	-	RP173Q362B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS37	-	RP173Q372B	LVR-IC	LDO, 3.7V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS38	-	RP173Q382B	LVR-IC	LDO, 3.8V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS39	-	RP173Q392B	LVR-IC	LDO, 3.9V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS4	-	XC6501D35AMR-G	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AS4	ej	XC6114E635MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AS40	-	RP173Q402B	LVR-IC	LDO, 4.0V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS41	-	RP173Q412B	LVR-IC	LDO, 4.1V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS42	-	RP173Q422B	LVR-IC	LDO, 4.2V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS43	-	RP173Q432B	LVR-IC	LDO, 4.3V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS44	-	RP173Q442B	LVR-IC	LDO, 4.4V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS45	-	RP173Q452B	LVR-IC	LDO, 4.5V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS46	-	RP173Q462B	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS47	-	RP173Q472B	LVR-IC	LDO, 4.7V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS48	-	RP173Q482B	LVR-IC	LDO, 4.8V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS49	-	RP173Q492B	LVR-IC	LDO, 4.9V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS5	-	XC6501D36AMR-G	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AS5	ej	XC6114E636MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AS50	-	RP173Q502B	LVR-IC	LDO, 5.0V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS51	-	RP173Q512B	LVR-IC	LDO, 5.1V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS52	-	RP173Q522B	LVR-IC	LDO, 5.2V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS53	-	RP173Q532B	LVR-IC	LDO, 5.3V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS54	-	RP173Q542B	LVR-IC	LDO, 5.4V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS55	-	RP173Q552B	LVR-IC	LDO, 5.5V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AS6	-	XC6501D37AMR-G	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AS6	ej	XC6114E637MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AS7	-	XC6501D38AMR-G	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AS7	ej	XC6114E638MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AS8	-	XC6501D39AMR-G	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AS8	ej	XC6114E639MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AS9	-	XC6501D40AMR-G	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AS9	ej	XC6114E640MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASA	-	XC6501D41AMR-G	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ASA	ej	XC6114E641MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASB	-	XC6501D42AMR-G	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ASB	ej	XC6114E642MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASC	-	XC6501D43AMR-G	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ASC	ej	XC6114E643MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASD	-	XC6501D44AMR-G	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ASD	ej	XC6114E644MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASE	-	XC6501D45AMR-G	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ASE	ej	XC6114E645MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASF	-	XC6501D46AMR-G	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ASF	ec	XC6114E616MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASF	ej	XC6114E646MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASH	-	XC6501D47AMR-G	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ASH	ec	XC6114E617MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASH	ej	XC6114E647MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASK	-	XC6501D48AMR-G	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ASK	ec	XC6114E618MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASK	ej	XC6114E648MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASL	-	XC6501D49AMR-G	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
ASL	ec	XC6114E619MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASL	ej	XC6114E649MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASM	-	AME8510AEEVAFE31	Vdet-IC	3.08V±1.5%, -Reset PPO,- MR, Strobe	SOT-23-5	28cp	VD17	6k	Ame
ASM	ec	XC6114E620MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASM	ej	XC6114E650MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASN	ec	XC6114E621MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASP	ec	XC6114E622MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASR	ec	XC6114E623MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASS	ec	XC6114E624MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AST	ec	XC6114E625MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASU	ec	XC6114E626MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASV	ec	XC6114E627MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASX	ec	XC6114E628MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
ASY	ec	XC6114E629MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ASZ	ec	XC6114E630MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD19	6g	Tor
AT	-	MAX825MEUK	Vdet-IC	4.38V±1.5%, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6k	Max
AT	-	PT7M7811ZTA	Vdet-IC	2.32V±1.5%, -Reset PPO, -MR	SOT-23-5	28vd2	VD5	6k	Pti
AT	-	R1112N271A	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
AT	-	SiP825TEU	Vdet-IC	3.08V±1.5%, MR, ±Reset PPO	SOT-23-5	28xf	VD21	6k	Vs
AT	ea	PT7M7811ZTAE	Vdet-IC	2.32V±1.5%, -Reset PPO, -MR, Lead free	SOT-23-5	28vd2	VD5	6k	Pti
AT-	-	RT9198-2HPU5	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SC-70-5	28xm	VR4	6a	Rct
AT0	ej	XC6114F531MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AT01	-	RP173Q122D5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT02	-	RP173Q182D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT03	-	RP173Q282D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT1	ej	XC6114F532MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AT12	-	RP173Q122D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT13	-	RP173Q132D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT14	-	RP173Q142D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT15	-	RP173Q152D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT16	-	RP173Q162D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT17	-	RP173Q172D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT18	-	RP173Q182D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT19	-	RP173Q192D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT2	ej	XC6114F533MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AT20	-	RP173Q202D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT21	-	RP173Q212D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT22	-	RP173Q222D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT23	-	RP173Q232D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT24	-	RP173Q242D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT25	-	RP173Q252D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT26	-	RP173Q262D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT27	-	RP173Q272D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT28	-	RP173Q282D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT29	-	RP173Q292D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT3	ej	XC6114F534MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AT30	-	RP173Q302D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT31	-	RP173Q312D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT32	-	RP173Q322D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT33	-	RP173Q332D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT34	-	RP173Q342D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT35	-	RP173Q352D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT36	-	RP173Q362D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT37	-	RP173Q372D	LVR-IC	LDO, 3.7V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT38	-	RP173Q382D	LVR-IC	LDO, 3.8V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT39	-	RP173Q392D	LVR-IC	LDO, 3.9V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT4	ej	XC6114F535MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AT40	-	RP173Q402D	LVR-IC	LDO, 4.0V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT41	-	RP173Q412D	LVR-IC	LDO, 4.1V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT42	-	RP173Q422D	LVR-IC	LDO, 4.2V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT43	-	RP173Q432D	LVR-IC	LDO, 4.3V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT44	-	RP173Q442D	LVR-IC	LDO, 4.4V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT45	-	RP173Q452D	LVR-IC	LDO, 4.5V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT46	-	RP173Q462D	LVR-IC	LDO, 4.6V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT47	-	RP173Q472D	LVR-IC	LDO, 4.7V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT48	-	RP173Q482D	LVR-IC	LDO, 4.8V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT49	-	RP173Q492D	LVR-IC	LDO, 4.9V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT5	ej	XC6114F536MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AT50	-	RP173Q502D	LVR-IC	LDO, 5.0V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT51	-	RP173Q512D	LVR-IC	LDO, 5.1V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT52	-	RP173Q522D	LVR-IC	LDO, 5.2V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT53	-	RP173Q532D	LVR-IC	LDO, 5.3V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT54	-	RP173Q542D	LVR-IC	LDO, 5.4V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT55	-	RP173Q552D	LVR-IC	LDO, 5.5V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AT6	ej	XC6114F537MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AT7	ej	XC6114F538MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AT8	ej	XC6114F539MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AT9	ej	XC6114F540MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATA	ej	XC6114F541MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATB	ej	XC6114F542MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATC	-	AME8520AEEVEFE26	Vdet-IC	2.63V±1.5%, ±Reset PPO, Strobe	SOT-23-5	28xq	VD19	6k	Ame
ATC	eh	AME8520AEEVEFE26Z	Vdet-IC	2.63V±1.5%, ±Reset PPO, Strobe, lead free	SOT-23-5	28xq	VD19	6k	Ame
ATC	ej	XC6114F543MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATD	ej	XC6114F544MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ATE	ej	XC6114F545MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATF	ec	XC6114F516MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATF	ej	XC6114F546MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATG	-	AME8510AEEVAFE26	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR, Strobe	SOT-23-5	28cp	VD17	6k	Ame
ATH	ec	XC6114F517MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATH	ej	XC6114F547MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATI	-	MAX8891EXK15+T	LVR-IC	LDO, 1.5V±3%, 200mA, +CE	SC-70-5	28cx	VR4	6a	Max
ATJ	-	AME8520AEEVEFE45	Vdet-IC	4.50V±1.5%, ±Reset PPO, Strobe	SOT-23-5	28xq	VD19	6k	Ame
ATJ	-	MAX8891EXK18+T	LVR-IC	LDO, 1.8V±3%, 200mA, +CE	SC-70-5	28cx	VR4	6a	Max
ATJ	eh	AME8520AEEVEFE45Z	Vdet-IC	4.50V±1.5%, ±Reset PPO, Strobe, lead free	SOT-23-5	28xq	VD19	6k	Ame
ATK	-	AME8520AEEVEFE42	Vdet-IC	4.20V±1.5%, ±Reset PPO, Strobe	SOT-23-5	28xq	VD19	6k	Ame
ATK	ec	XC6114F518MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATK	eh	AME8520AEEVEFE42Z	Vdet-IC	4.20V±1.5%, ±Reset PPO, Strobe, lead free	SOT-23-5	28xq	VD19	6k	Ame
ATK	ej	XC6114F548MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATL	-	AME8520AEEVEFE31	Vdet-IC	3.08V±1.5%, ±Reset PPO, Strobe	SOT-23-5	28xq	VD19	6k	Ame
ATL	-	MAX8891EXK25+T	LVR-IC	LDO, 2.5V±3%, 200mA, +CE	SC-70-5	28cx	VR4	6a	Max
ATL	ec	XC6114F519MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATL	eh	AME8520AEEVEFE31Z	Vdet-IC	3.08V±1.5%, ±Reset PPO, Strobe, lead free	SOT-23-5	28xq	VD19	6k	Ame
ATL	ej	XC6114F549MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATM	-	AME8530AEEVEFX45	Vdet-IC	4.50V±1.5%, ±Reset PPO -MR	SOT-23-5	28xf	VD21	6k	Ame
ATM	-	MAX8891EXK26+T	LVR-IC	LDO, 2.6V±3%, 200mA, +CE	SC-70-5	28cx	VR4	6a	Max
ATM	ec	XC6114F520MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATM	eh	AME8530AEEVEFX45Z	Vdet-IC	4.50V±1.5%, ±Reset PPO -MR, lead free	SOT-23-5	28xf	VD21	6k	Ame
ATM	ej	XC6114F550MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATN	-	AME8530AEEVEFX31	Vdet-IC	3.08V±1.5%, ±Reset PPO -MR	SOT-23-5	28xf	VD21	6k	Ame
ATN	ec	XC6114F521MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATN	eh	AME8530AEEVEFX31Z	Vdet-IC	3.08V±1.5%, ±Reset PPO -MR, lead free	SOT-23-5	28xf	VD21	6k	Ame
ATO	-	MAX8891EXK28+T	LVR-IC	LDO, 2.8V±3%, 200mA, +CE	SC-70-5	28cx	VR4	6a	Max
ATP	-	MAX8891EXK29+T	LVR-IC	LDO, 2.85V±3%, 200mA, +CE	SC-70-5	28cx	VR4	6a	Max
ATP	ec	XC6114F522MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATR	-	MAX8891EXK31+T	LVR-IC	LDO, 3.1V±3%, 200mA, +CE	SC-70-5	28cx	VR4	6a	Max
ATR	ec	XC6114F523MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATS	-	MAX8891EXK33+T	LVR-IC	LDO, 3.3V±3%, 200mA, +CE	SC-70-5	28cx	VR4	6a	Max
ATS	ec	XC6114F524MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATT	ec	XC6114F525MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATU	-	AME8510AEEVEFE31	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR, Strobe	SOT-23-5	28cp	VD17	6k	Ame
ATU	-	MAX8891EXK45+T	LVR-IC	LDO, 4.5V±3%, 200mA, +CE	SC-70-5	28cx	VR4	6a	Max
ATU	ec	XC6114F526MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATV	-	AME8520AEEVEFE29	Vdet-IC	2.93V±1.5%, ±Reset PPO, Strobe	SOT-23-5	28xq	VD19	6k	Ame
ATV	-	MAX8891EXK89+T	LVR-IC	LDO, 2.9V±3%, 200mA, +CE	SC-70-5	28cx	VR4	6a	Max
ATV	ec	XC6114F527MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATV	eh	AME8520AEEVEFE29Z	Vdet-IC	2.93V±1.5%, ±Reset PPO, Strobe, lead free	SOT-23-5	28xq	VD19	6k	Ame
ATW	-	AME8520AEEVEFE44	Vdet-IC	4.38V±1.5%, ±Reset PPO, Strobe	SOT-23-5	28xq	VD19	6k	Ame
ATW	-	MAX8892EXK+T	LVR-IC	LDO, Adjustable 1.5..3.0V, 200mA, +CE	SC-70-5	28sg	VR16	6a	Max
ATW	eh	AME8520AEEVEFE44Z	Vdet-IC	4.38V±1.5%, ±Reset PPO, Strobe, lead free	SOT-23-5	28xq	VD19	6k	Ame
ATX	-	AME8510AEEVAFE29	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR, Strobe	SOT-23-5	28cp	VD17	6k	Ame
ATX	ec	XC6114F528MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATY	ec	XC6114F529MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
ATZ	ec	XC6114F530MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AU	-	MAX825TEUK	Vdet-IC	3.08V±1.5%, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6k	Max
AU	-	PT7M7811YTA	Vdet-IC	2.20V±1.5%, -Reset PPO, -MR	SOT-23-5	28vd2	VD5	6k	Pti
AU	-	R1112N281A	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
AU	ea	PT7M7811YTAE	Vdet-IC	2.20V±1.5%, -Reset PPO, -MR, Lead free	SOT-23-5	28vd2	VD5	6k	Pti
AU-	-	RT9198-30PU5R	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6a	Rct
AU0	ej	XC6114F631MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AU01	-	RP112Q122B5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU02	-	RP112Q182B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU03	-	RP112Q282B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU1	ej	XC6114F632MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AU12	-	RP112Q122B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU13	-	RP112Q132B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU14	-	RP112Q142B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU15	-	RP112Q152B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU16	-	RP112Q162B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU17	-	RP112Q172B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU18	-	RP112Q182B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU19	-	RP112Q192B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU2	ej	XC6114F633MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AU20	-	RP112Q202B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU21	-	RP112Q212B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AU22	-	RP112Q222B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU23	-	RP112Q232B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU24	-	RP112Q242B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU25	-	RP112Q252B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU26	-	RP112Q262B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU27	-	RP112Q272B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU28	-	RP112Q282B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU29	-	RP112Q292B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU3	ej	XC6114F634MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AU30	-	RP112Q302B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU31	-	RP112Q312B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU32	-	RP112Q322B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU33	-	RP112Q332B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU34	-	RP112Q342B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU35	-	RP112Q352B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU36	-	RP112Q362B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU37	-	RP112Q372B	LVR-IC	LDO, 3.7V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU38	-	RP112Q382B	LVR-IC	LDO, 3.8V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU39	-	RP112Q392B	LVR-IC	LDO, 3.9V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU4	-	74AHC1GU04GV	CMOS-Log	Inverter	SOT753	28	Log6	6a	Nxp
AU4	ej	XC6114F635MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AU40	-	RP112Q402B	LVR-IC	LDO, 4.0V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU41	-	RP112Q412B	LVR-IC	LDO, 4.1V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU42	-	RP112Q422B	LVR-IC	LDO, 4.2V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU43	-	RP112Q432B	LVR-IC	LDO, 4.3V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU44	-	RP112Q442B	LVR-IC	LDO, 4.4V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU45	-	RP112Q452B	LVR-IC	LDO, 4.5V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU46	-	RP112Q462B	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU47	-	RP112Q472B	LVR-IC	LDO, 4.7V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU48	-	RP112Q482B	LVR-IC	LDO, 4.8V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
AU5	ej	XC6114F636MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AU6	ej	XC6114F637MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AU7	ej	XC6114F638MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AU8	ej	XC6114F639MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AU9	ej	XC6114F640MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUA	ej	XC6114F641MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUB	-	XC6501A121MR-G	LVR-IC	LDO, 1.2V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUB	ej	XC6114F642MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUC	-	XC6501A131MR-G	LVR-IC	LDO, 1.3V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUC	ej	XC6114F643MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUD	-	XC6501A141MR-G	LVR-IC	LDO, 1.4V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUD	ej	XC6114F644MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUE	-	XC6501A151MR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUE	ej	XC6114F645MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUF	-	AME8500BEEVAK27	Vdet-IC	2.7V±1.5%, -Reset PPO, 1.5ms	SOT-23-5	28vdm	VD7	6k	Ame
AUF	-	XC6501A161MR-G	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUF	ec	XC6114F616MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUF	eh	AME8500BEEVAK27Z	Vdet-IC	2.7V±1.5%, -Reset PPO, 1.5ms, lead free	SOT-23-5	28vdm	VD7	6k	Ame
AUF	ej	XC6114F646MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUH	-	XC6501A171MR-G	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUH	ec	XC6114F617MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUH	ej	XC6114F647MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUK	-	XC6501A181MR-G	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUK	ec	XC6114F618MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUK	ej	XC6114F648MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUL	-	XC6501A191MR-G	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUL	ec	XC6114F619MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUL	ej	XC6114F649MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUM	-	XC6501A201MR-G	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUM	ec	XC6114F620MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUM	ej	XC6114F650MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUN	-	XC6501A211MR-G	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUN	ec	XC6114F621MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUP	-	XC6501A221MR-G	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUP	ec	XC6114F622MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUR	-	XC6501A231MR-G	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUR	ec	XC6114F623MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUS	-	AME8530AEEVEFX29	Vdet-IC	2.93V±1.5%, ±Reset PPO -MR	SOT-23-5	28xf	VD21	6k	Ame
AUS	-	XC6501A241MR-G	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUS	ec	XC6114F624MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AUS	eh	AME8530AEEVEFX29Z	Vdet-IC	2.93V±1.5%, ±Reset PPO -MR, lead free	SOT-23-5	28xf	VD21	6k	Ame
AUT	-	XC6501A251MR-G	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUT	ec	XC6114F625MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUU	-	XC6501A261MR-G	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUU	ec	XC6114F626MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUV	-	XC6501A271MR-G	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUV	ec	XC6114F627MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUX	-	XC6501A281MR-G	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUX	ec	XC6114F628MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUY	-	XC6501A291MR-G	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUY	ec	XC6114F629MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AUZ	-	XC6501A301MR-G	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
AUZ	ec	XC6114F630MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD19	6g	Tor
AV	-	MAX825SEUK	Vdet-IC	2.93V±1.5%, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6k	Max
AV	-	PT7M7812LTA	Vdet-IC	4.63V±1.5%, +Reset PPO, -MR	SOT-23-5	28vd2	VD5	6k	Pti
AV	-	R1112N291A	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
AV	-	SiP825SEU	Vdet-IC	2.93V±1.5%, MR, ±Reset PPO	SOT-23-5	28xf	VD21	6k	Vs
AV	ea	PT7M7812LTAE	Vdet-IC	4.63V±1.5%, +Reset PPO, -MR, Lead free	SOT-23-5	28vd2	VD5	6k	Pti
AV-	-	RT9013-15PU5	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6g	Rct
AV0	ej	XC6114H631MR	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AV01	-	RP112Q122D5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV02	-	RP112Q182D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV03	-	RP112Q282D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV1	ej	XC6114H632MR	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AV12	-	RP112Q122D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV13	-	RP112Q132D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV14	-	RP112Q142D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV15	-	RP112Q152D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV16	-	RP112Q162D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV17	-	RP112Q172D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV18	-	RP112Q182D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV19	-	RP112Q192D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV2	ej	XC6114H633MR	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AV20	-	RP112Q202D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV21	-	RP112Q212D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV22	-	RP112Q222D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV23	-	RP112Q232D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV24	-	RP112Q242D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV25	-	RP112Q252D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV26	-	RP112Q262D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV27	-	RP112Q272D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV28	-	RP112Q282D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV29	-	RP112Q292D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV3	ej	XC6114H634MR	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AV30	-	RP112Q302D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV31	-	RP112Q312D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV32	-	RP112Q322D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV33	-	RP112Q332D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV34	-	RP112Q342D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV35	-	RP112Q352D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV36	-	RP112Q362D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV37	-	RP112Q372D	LVR-IC	LDO, 3.7V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV38	-	RP112Q382D	LVR-IC	LDO, 3.8V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV39	-	RP112Q392D	LVR-IC	LDO, 3.9V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV4	ej	XC6114H635MR	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AV40	-	RP112Q402D	LVR-IC	LDO, 4.0V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV41	-	RP112Q412D	LVR-IC	LDO, 4.1V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV42	-	RP112Q422D	LVR-IC	LDO, 4.2V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV43	-	RP112Q432D	LVR-IC	LDO, 4.3V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV44	-	RP112Q442D	LVR-IC	LDO, 4.4V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV45	-	RP112Q452D	LVR-IC	LDO, 4.5V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV46	-	RP112Q462D	LVR-IC	LDO, 4.6V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV47	-	RP112Q472D	LVR-IC	LDO, 4.7V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV48	-	RP112Q482D	LVR-IC	LDO, 4.9V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
AV5	ej	XC6114H636MR	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AV6	ej	XC6114H637MR	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AV7	ej	XC6114H638MR	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AV8	-	XC6211A092MR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AV8	ej	XC6114H639MR	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AV9	-	XC6211A102MR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AV9	ej	XC6114H640MR	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVA	-	XC6211A112MR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVA	ej	XC6114H641MR	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVB	-	XC6211A122MR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVB	-	XC6501B121MR-G	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVB	ej	XC6114H642MR	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVC	-	XC6211A132MR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVC	-	XC6501B131MR-G	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVC	ej	XC6114H643MR	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVD	-	XC6211A142MR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVD	-	XC6501B141MR-G	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVD	ej	XC6114H644MR	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVE	-	AME8530AEEVAFX29	Vdet-IC	2.93V±1.5%, ±Reset PPO, -MR	SOT-23-5	28xf	VD21	6k	Ame
AVE	-	XC6211A152MR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVE	-	XC6501B151MR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVE	eh	AME8530AEEVAFX29Z	Vdet-IC	2.93V±1.5%, ±Reset PPO, -MR, lead free	SOT-23-5	28xf	VD21	6k	Ame
AVE	ej	XC6114H645MR	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVF	-	AME8530AEEVAFX31	Vdet-IC	3.08V±1.5%, ±Reset PPO -MR	SOT-23-5	28xf	VD21	6k	Ame
AVF	-	XC6211A162MR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVF	-	XC6501B161MR-G	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVF	ec	XC6114H616MR	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVF	eh	AME8530AEEVAFX31Z	Vdet-IC	3.08V±1.5%, ±Reset PPO -MR, lead free	SOT-23-5	28xf	VD21	6k	Ame
AVF	ej	XC6114H646MR	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVH	-	XC6211A172MR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVH	-	XC6501B171MR-G	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVH	ec	XC6114H617MR	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVH	ej	XC6114H647MR	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVK	-	XC6211A182MR	LVR-IC	LDO, 1.8V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVK	-	XC6501B181MR-G	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVK	ec	XC6114H618MR	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVK	ej	XC6114H648MR	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVL	-	XC6211A192MR	LVR-IC	LDO, 1.9V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVL	-	XC6501B191MR-G	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVL	ec	XC6114H619MR	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVL	ej	XC6114H649MR	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVM	-	XC6211A202MR	LVR-IC	LDO, 2.0V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVM	-	XC6501B201MR-G	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVM	ec	XC6114H620MR	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVM	ej	XC6114H650MR	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVN	-	XC6211A212MR	LVR-IC	LDO, 2.1V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVN	-	XC6501B211MR-G	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVN	ec	XC6114H621MR	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVP	-	XC6211A222MR	LVR-IC	LDO, 2.2V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVP	-	XC6501B221MR-G	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVP	ec	XC6114H622MR	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVR	-	XC6211A232MR	LVR-IC	LDO, 2.3V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVR	-	XC6501B231MR-G	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVR	ec	XC6114H623MR	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVS	-	XC6211A242MR	LVR-IC	LDO, 2.4V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVS	-	XC6501B241MR-G	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVS	ec	XC6114H624MR	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVT	-	XC6211A252MR	LVR-IC	LDO, 2.5V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVT	-	XC6501B251MR-G	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVT	ec	XC6114H625MR	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVU	-	XC6211A262MR	LVR-IC	LDO, 2.6V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVU	-	XC6501B261MR-G	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVU	ec	XC6114H626MR	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVV	-	XC6211A272MR	LVR-IC	LDO, 2.7V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVV	-	XC6501B271MR-G	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVV	ec	XC6114H627MR	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVX	-	XC6211A282MR	LVR-IC	LDO, 2.8V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVX	-	XC6501B281MR-G	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVX	ec	XC6114H628MR	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVY	-	XC6211A292MR	LVR-IC	LDO, 2.9V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVY	-	XC6501B291MR-G	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVY	ec	XC6114H629MR	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AVZ	-	XC6211A302MR	LVR-IC	LDO, 3.0V±2%, 240mA, +CE, PDR	SOT-25	28vc	VR4	6g	Tor
AVZ	-	XC6501B301MR-G	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
AVZ	ec	XC6114H630MR	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD19	6g	Tor
AW	-	MAX825REUK	Vdet-IC	2.63V±1.5%, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6k	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AW	-	PT7M7812MTA	Vdet-IC	4.38V±1.5%, +Reset PPO, -MR	SOT-23-5	28vd2	VD5	6k	Pti
AW	-	SiP825REU	Vdet-IC	2.63V±1.5%, MR, ±Reset PPO	SOT-23-5	28xf	VD21	6k	Vs
AW	ea	PT7M7812MTAE	Vdet-IC	4.38V±1.5%, +Reset PPO, -MR, Lead free	SOT-23-5	28vd2	VD5	6k	Pti
AW-	-	RT9013-18PU5	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6g	Rct
AW00	-	RP202Q282B5	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW01	-	RP202Q122B5	LVR-IC	LDO, 1.25V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW02	-	RP202Q292B5	LVR-IC	LDO, 2.95V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW08	-	RP202Q082B	LVR-IC	LDO, 0.8V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW09	-	RP202Q092B	LVR-IC	LDO, 0.9V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW10	-	RP202Q102B	LVR-IC	LDO, 1.0V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW11	-	RP202Q112B	LVR-IC	LDO, 1.1V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW12	-	RP202Q122B	LVR-IC	LDO, 1.2V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW13	-	RP202Q132B	LVR-IC	LDO, 1.3V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW14	-	RP202Q142B	LVR-IC	LDO, 1.4V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW15	-	RP202Q152B	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW16	-	RP202Q162B	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW17	-	RP202Q172B	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW18	-	RP202Q182B	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW19	-	RP202Q192B	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW20	-	RP202Q202B	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW21	-	RP202Q212B	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW22	-	RP202Q222B	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW23	-	RP202Q232B	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW24	-	RP202Q242B	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW25	-	RP202Q252B	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW26	-	RP202Q262B	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW27	-	RP202Q272B	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW28	-	RP202Q282B	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW29	-	RP202Q292B	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW30	-	RP202Q302B	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW31	-	RP202Q312B	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW32	-	RP202Q322B	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW33	-	RP202Q332B	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW34	-	RP202Q342B	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW35	-	RP202Q352B	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW36	-	RP202Q362B	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW37	-	RP202Q372B	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW38	-	RP202Q382B	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW39	-	RP202Q392B	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AW40	-	RP202Q402B	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
AWG	-	AME8861AEEV300	LVR-IC	LDO, 3.0V±1.5%, 600mA, +CE	SOT-25	28vrx	VR7	6k	Ame
AWG	-	AME8861AEEV300L	LVR-IC	LDO, 3.0V±1.5%, 600mA, +CE	TSOT-25	28vrx	VR7	6k	Ame
AWG	eh	AME8861AEEV300Y	LVR-IC	LDO, 3.0V±1.5%, 600mA, +CE	TSOT-25	28vrx	VR7	6k	Ame
AWG	eh	AME8861AEEV300Z	LVR-IC	LDO, 3.0V±1.5%, 600mA, +CE	SOT-25	28vrx	VR7	6k	Ame
AWS	-	AME8520AEEVEFE22	Vdet-IC	2.19V±1.5%, ±Reset PPO, Strobe	SOT-23-5	28xq	VD19	6k	Ame
AWS	eh	AME8520AEEVEFE22Z	Vdet-IC	2.19V±1.5%, ±Reset PPO, Strobe, lead free	SOT-23-5	28xq	VD19	6k	Ame
AWW	-	AME8530AEEVEFX26	Vdet-IC	2.63V±1.5%, ±Reset PPO -MR	SOT-23-5	28xf	VD21	6k	Ame
AWW	eh	AME8530AEEVEFX26Z	Vdet-IC	2.63V±1.5%, ±Reset PPO -MR, lead free	SOT-23-5	28xf	VD21	6k	Ame
AWY	-	AME8510AEEVAFE22	Vdet-IC	2.19V±1.5%, -Reset PPO, -MR, Strobe	SOT-23-5	28cp	VD17	6k	Ame
AX	-	AT1201-50X	LVR-IC	LDO, LN, +CE, 5V±2%, 150mA	SOT-23-5	28vrx	VR7	6a	Atr
AX	-	PT7M7812TTA	Vdet-IC	3.08V±1.5%, +Reset PPO, -MR	SOT-23-5	28vd2	VD5	6k	Pti
AX	-	SiP825ZEU	Vdet-IC	2.32V±1.5%, MR, ±Reset PPO	SOT-23-5	28xf	VD21	6k	Vs
AX	ea	PT7M7812TTAE	Vdet-IC	3.08V±1.5%, +Reset PPO, -MR, Lead free	SOT-23-5	28vd2	VD5	6k	Pti
AX-	-	RT9013-25PU5	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6g	Rct
AX00	-	RP202Q282D5	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX01	-	RP202Q122D5	LVR-IC	LDO, 1.25V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX02	-	RP202Q292D5	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX08	-	RP202Q082D	LVR-IC	LDO, 0.8V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX09	-	RP202Q092D	LVR-IC	LDO, 0.9V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX10	-	RP202Q102D	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX11	-	RP202Q112D	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX12	-	RP202Q122D	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX13	-	RP202Q132D	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX14	-	RP202Q142D	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX15	-	RP202Q152D	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX16	-	RP202Q162D	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX17	-	RP202Q172D	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX18	-	RP202Q182D	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX19	-	RP202Q192D	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX20	-	RP202Q202D	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AX21	-	RP202Q212D	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX22	-	RP202Q222D	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX23	-	RP202Q232D	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX24	-	RP202Q242D	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX25	-	RP202Q252D	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX26	-	RP202Q262D	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX27	-	RP202Q272D	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX28	-	RP202Q282D	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX29	-	RP202Q292D	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX30	-	RP202Q302D	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX31	-	RP202Q312D	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX32	-	RP202Q322D	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX33	-	RP202Q332D	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX34	-	RP202Q342D	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX35	-	RP202Q352D	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX36	-	RP202Q362D	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX37	-	RP202Q372D	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX38	-	RP202Q382D	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX39	-	RP202Q392D	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX40	-	RP202Q402D	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
AX8	-	XC6211B092MR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AX9	-	XC6211B102MR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXA	-	XC6211B112MR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXB	-	AME8861AEEV330	LVR-IC	LDO, 3.3V±1.5%, 600mA, +CE	SOT-25	28vrx	VR7	6k	Ame
AXB	-	AME8861AEEV330L	LVR-IC	LDO, 3.3V±1.5%, 600mA, +CE	TSOT-25	28vrx	VR7	6k	Ame
AXB	-	XC6211B122MR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXB	-	XC6501C121MR-G	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXB	eh	AME8861AEEV330Y	LVR-IC	LDO, 3.3V±1.5%, 600mA, +CE	TSOT-25	28vrx	VR7	6k	Ame
AXB	eh	AME8861AEEV330Z	LVR-IC	LDO, 3.3V±1.5%, 600mA, +CE	SOT-25	28vrx	VR7	6k	Ame
AXC	-	AME8861AEEV250	LVR-IC	LDO, 2.5V±1.5%, 600mA, +CE	SOT-25	28vrx	VR7	6k	Ame
AXC	-	AME8861AEEV250L	LVR-IC	LDO, 2.5V±1.5%, 600mA, +CE	TSOT-25	28vrx	VR7	6k	Ame
AXC	-	XC6211B132MR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXC	-	XC6501C131MR-G	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXC	eh	AME8861AEEV250Y	LVR-IC	LDO, 2.5V±1.5%, 600mA, +CE	TSOT-25	28vrx	VR7	6k	Ame
AXC	eh	AME8861AEEV250Z	LVR-IC	LDO, 2.5V±1.5%, 600mA, +CE	SOT-25	28vrx	VR7	6k	Ame
AXD	-	XC6211B142MR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXD	-	XC6501C141MR-G	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXE	-	XC6211B152MR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXE	-	XC6501C151MR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXF	-	XC6211B162MR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXF	-	XC6501C161MR-G	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXH	-	XC6211B172MR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXH	-	XC6501C171MR-G	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXK	-	XC6211B182MR	LVR-IC	LDO, 1.8V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXK	-	XC6501C181MR-G	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXL	-	XC6211B192MR	LVR-IC	LDO, 1.9V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXL	-	XC6501C191MR-G	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXM	-	XC6211B202MR	LVR-IC	LDO, 2.0V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXM	-	XC6501C201MR-G	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXN	-	XC6211B212MR	LVR-IC	LDO, 2.1V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXN	-	XC6501C211MR-G	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXO	-	AME8550AEEVC190Y	Vdet-IC	1.9V±2%, -Reset PPO	TSOT-25	28za	VD3	6g	Ame
AXO	-	AME8550AEEVC190Z	Vdet-IC	1.9V±2%, -Reset PPO	SOT-25	28za	VD3	6g	Ame
AXO	eh	AME8550AEEVC190L	Vdet-IC	1.9V±2%, -Reset PPO	SOT-25	28za	VD3	6g	Ame
AXP	-	AME8550BEEVC190Y	Vdet-IC	1.9V±2%, -Reset PPO	TSOT-25	28vdo	VD3	6g	Ame
AXP	-	AME8550BEEVC190Z	Vdet-IC	1.9V±2%, -Reset PPO	SOT-25	28vdo	VD3	6g	Ame
AXP	-	XC6211B222MR	LVR-IC	LDO, 2.2V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXP	-	XC6501C221MR-G	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXP	eh	AME8550BEEVC190L	Vdet-IC	1.9V±2%, -Reset PPO	SOT-25	28vdo	VD3	6g	Ame
AXR	-	AME8550CEEVB210Y	Vdet-IC	2.1V±2%, -Reset ODO	TSOT-25	28vdm	VD6	6g	Ame
AXR	-	AME8550CEEVB210Z	Vdet-IC	2.1V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
AXR	-	XC6211B232MR	LVR-IC	LDO, 2.3V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXR	-	XC6501C231MR-G	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXR	eh	AME8550CEEVB210L	Vdet-IC	2.1V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
AXS	-	AME8550CEEVB220Y	Vdet-IC	2.2V±2%, -Reset ODO	TSOT-25	28vdm	VD6	6g	Ame
AXS	-	AME8550CEEVB220Z	Vdet-IC	2.2V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
AXS	-	XC6211B242MR	LVR-IC	LDO, 2.4V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXS	-	XC6501C241MR-G	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXS	eh	AME8550CEEVB220L	Vdet-IC	2.2V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
AXT	-	XC6211B252MR	LVR-IC	LDO, 2.5V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AXT	-	XC6501C251MR-G	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXU	-	AME8550CEEVA240Y	Vdet-IC	2.4V±2%, -Reset PPO	TSOT-25	28vdm	VD7	6g	Ame
AXU	-	AME8550CEEVA240Z	Vdet-IC	2.4V±2%, -Reset PPO	SOT-25	28vdm	VD1	6g	Ame
AXU	-	XC6211B262MR	LVR-IC	LDO, 2.6V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXU	-	XC6501C261MR-G	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXU	eh	AME8550CEEVA240L	Vdet-IC	2.4V±2%, -Reset PPO	SOT-25	28vdm	VD1	6g	Ame
AXV	-	XC6211B272MR	LVR-IC	LDO, 2.7V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXV	-	XC6501C271MR-G	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXW	-	AME8550CEEVB240Y	Vdet-IC	2.4V±2%, -Reset ODO	TSOT-25	28vdm	VD6	6g	Ame
AXW	-	AME8550CEEVB240Z	Vdet-IC	2.4V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
AXW	eh	AME8550CEEVB240L	Vdet-IC	2.4V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
AXX	-	AME8550AEEVD240Y	Vdet-IC	2.4V±2%, -Reset ODO	TSOT-25	28za	VD1	6g	Ame
AXX	-	AME8550AEEVD240Z	Vdet-IC	2.4V±2%, -Reset ODO	SOT-25	28za	VD1	6g	Ame
AXX	-	XC6211B282MR	LVR-IC	LDO, 2.8V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXX	-	XC6501C281MR-G	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXX	eh	AME8550AEEVD240L	Vdet-IC	2.4V±2%, -Reset ODO	SOT-25	28za	VD1	6g	Ame
AXY	-	AME8550BEEVD240Y	Vdet-IC	2.4V±2%, -Reset ODO	TSOT-25	28vdo	VD1	6g	Ame
AXY	-	AME8550BEEVD240Z	Vdet-IC	2.4V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
AXY	-	XC6211B292MR	LVR-IC	LDO, 2.9V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXY	-	XC6501C291MR-G	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
AXY	eh	AME8550BEEVD240L	Vdet-IC	2.4V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
AXZ	-	XC6211B302MR	LVR-IC	LDO, 3.0V±2%, 240mA, +CE	SOT-25	28vc	VR4	6g	Tor
AXZ	-	XC6501C301MR-G	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
Ay	-	BD48E36G	Vdet-IC	3.6V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
AY	-	PT7M7812STA	Vdet-IC	2.93V±1.5%, +Reset PPO, -MR	SOT-23-5	28vd2	VD5	6k	Pti
AY	-	SiP825YEU	Vdet-IC	2.19V±1.5%, MR, ±Reset PPO	SOT-23-5	28xf	VD21	6k	Vs
AY	-	TC1014-1.8VRX	LVR-IC	LDO, 1.8V±2%, 50mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
AY	ea	PT7M7812STAE	Vdet-IC	2.93V±1.5%, +Reset PPO, -MR, Lead free	SOT-23-5	28vd2	VD5	6k	Pti
AY-	-	RT9013-28PU5	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6g	Rct
AY=	-	RT9013-28GU5	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6g	Rct
AY8	-	XC6211C092MR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AY9	-	XC6211C102MR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYA	-	AME8550CEEVB250Y	Vdet-IC	2.5V±2%, -Reset ODO	TSOT-25	28vdm	VD6	6g	Ame
AYA	-	AME8550CEEVB250Z	Vdet-IC	2.5V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
AYA	-	XC6211C112MR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYA	eh	AME8550CEEVB250L	Vdet-IC	2.5V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
AYB	-	XC6211C122MR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYB	-	XC6501D121MR-G	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYC	-	AME8550CEEVB280Y	Vdet-IC	2.8V±2%, -Reset ODO	TSOT-25	28vdm	VD6	6g	Ame
AYC	-	AME8550CEEVB280Z	Vdet-IC	2.8V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
AYC	-	XC6211C132MR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYC	-	XC6501D131MR-G	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYC	eh	AME8550CEEVB280L	Vdet-IC	2.8V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
AYD	-	AME8550AEEVC290Y	Vdet-IC	2.9V±2%, -Reset PPO	TSOT-25	28za	VD3	6g	Ame
AYD	-	AME8550AEEVC290Z	Vdet-IC	2.9V±2%, -Reset PPO	SOT-25	28za	VD3	6g	Ame
AYD	-	XC6211C142MR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYD	-	XC6501D141MR-G	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYD	eh	AME8550AEEVC290L	Vdet-IC	2.9V±2%, -Reset PPO	SOT-25	28za	VD3	6g	Ame
AYE	-	AME8550BEEVC290Y	Vdet-IC	2.9V±2%, -Reset PPO	TSOT-25	28vdo	VD3	6g	Ame
AYE	-	AME8550BEEVC290Z	Vdet-IC	2.9V±2%, -Reset PPO	SOT-25	28vdo	VD3	6g	Ame
AYE	-	XC6211C152MR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYE	-	XC6501D151MR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYE	eh	AME8550BEEVC290L	Vdet-IC	2.9V±2%, -Reset PPO	SOT-25	28vdo	VD3	6g	Ame
AYF	-	XC6211C162MR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYF	-	XC6501D161MR-G	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYG	-	AME8550CEEVA300Y	Vdet-IC	3.0V±2%, -Reset PPO	TSOT-25	28vdm	VD7	6g	Ame
AYG	-	AME8550CEEVA300Z	Vdet-IC	3.0V±2%, -Reset PPO	SOT-25	28vdm	VD7	6g	Ame
AYG	eh	AME8550CEEVA300L	Vdet-IC	3.0V±2%, -Reset PPO	SOT-25	28vdm	VD7	6g	Ame
AYH	-	XC6211C172MR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYH	-	XC6501D171MR-G	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYI	-	AME8550CEEVB340Y	Vdet-IC	3.4V±2%, -Reset ODO	TSOT-25	28vdm	VD6	6g	Ame
AYI	-	AME8550CEEVB340Z	Vdet-IC	3.4V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
AYI	eh	AME8550CEEVB340L	Vdet-IC	3.4V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
AYJ	-	AME8550AEEVD360Y	Vdet-IC	3.6V±2%, -Reset ODO	TSOT-25	28za	VD1	6g	Ame
AYJ	-	AME8550AEEVD360Z	Vdet-IC	3.6V±2%, -Reset ODO	SOT-25	28za	VD1	6g	Ame
AYJ	eh	AME8550AEEVD360L	Vdet-IC	3.6V±2%, -Reset ODO	SOT-25	28za	VD1	6g	Ame
AYK	-	AME8550BEEVD360Y	Vdet-IC	3.6V±2%, -Reset ODO	TSOT-25	28vdo	VD1	6g	Ame
AYK	-	AME8550BEEVD360Z	Vdet-IC	3.6V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
AYK	-	XC6211C182MR	LVR-IC	LDO, 1.8V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYK	-	XC6501D181MR-G	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AYK	eh	AME8550BEEVD360L	Vdet-IC	3.6V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
AYL	-	XC6211C192MR	LVR-IC	LDO, 1.9V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYL	-	XC6501D191MR-G	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYM	-	AME8550CEEVB440Y	Vdet-IC	4.4V±2%, -Reset ODO	TSOT-25	28vdm	VD6	6g	Ame
AYM	-	AME8550CEEVB440Z	Vdet-IC	4.4V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
AYM	-	XC6211C202MR	LVR-IC	LDO, 2.0V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYM	-	XC6501D201MR-G	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYM	eh	AME8550CEEVB440L	Vdet-IC	4.4V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
AYN	-	AME8550AEEVC460Y	Vdet-IC	4.6V±2%, -Reset PPO	TSOT-25	28za	VD3	6g	Ame
AYN	-	AME8550AEEVC460Z	Vdet-IC	4.6V±2%, -Reset PPO	SOT-25	28za	VD3	6g	Ame
AYN	-	XC6211C212MR	LVR-IC	LDO, 2.1V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYN	-	XC6501D211MR-G	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYN	eh	AME8550AEEVC460L	Vdet-IC	4.6V±2%, -Reset PPO	SOT-25	28za	VD3	6g	Ame
AYO	-	AME8550BEEVC460Y	Vdet-IC	4.6V±2%, -Reset PPO	TSOT-25	28vdo	VD3	6g	Ame
AYO	-	AME8550BEEVC460Z	Vdet-IC	4.6V±2%, -Reset PPO	SOT-25	28vdo	VD3	6g	Ame
AYO	eh	AME8550BEEVC460L	Vdet-IC	4.6V±2%, -Reset PPO	SOT-25	28vdo	VD3	6g	Ame
AYP	-	XC6211C222MR	LVR-IC	LDO, 2.2V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYP	-	XC6501D221MR-G	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYR	-	XC6211C232MR	LVR-IC	LDO, 2.3V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYR	-	XC6501D231MR-G	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYS	-	AME8550CEEVB270Y	Vdet-IC	2.7V±2%, -Reset ODO	TSOT-25	28vdm	VD6	6g	Ame
AYS	-	AME8550CEEVB270Z	Vdet-IC	2.7V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
AYS	-	XC6211C242MR	LVR-IC	LDO, 2.4V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYS	-	XC6501D241MR-G	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYS	eh	AME8550CEEVB270L	Vdet-IC	2.7V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
AYT	-	AME8550AEEVD230Y	Vdet-IC	2.3V±2%, -Reset ODO	TSOT-25	28za	VD1	6g	Ame
AYT	-	AME8550AEEVD230Z	Vdet-IC	2.3V±2%, -Reset ODO	SOT-25	28za	VD1	6g	Ame
AYT	-	XC6211C252MR	LVR-IC	LDO, 2.5V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYT	-	XC6501D251MR-G	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYT	eh	AME8550AEEVD230L	Vdet-IC	2.3V±2%, -Reset ODO	SOT-25	28za	VD1	6g	Ame
AYU	-	AME8550BEEVD230Y	Vdet-IC	2.3V±2%, -Reset ODO	TSOT-25	28vdo	VD1	6g	Ame
AYU	-	AME8550BEEVD230Z	Vdet-IC	2.3V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
AYU	-	XC6211C262MR	LVR-IC	LDO, 2.6V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYU	-	XC6501D261MR-G	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYU	eh	AME8550BEEVD230L	Vdet-IC	2.3V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
AYV	-	AME8550AEEVD260Y	Vdet-IC	2.6V±2%, -Reset ODO	TSOT-25	28za	VD1	6g	Ame
AYV	-	AME8550AEEVD260Z	Vdet-IC	2.6V±2%, -Reset ODO	SOT-25	28za	VD1	6g	Ame
AYV	-	XC6211C272MR	LVR-IC	LDO, 2.7V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYV	-	XC6501D271MR-G	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYV	eh	AME8550AEEVD260L	Vdet-IC	2.6V±2%, -Reset ODO	SOT-25	28za	VD1	6g	Ame
AYW	-	AME8550BEEVD260Y	Vdet-IC	2.6V±2%, -Reset ODO	TSOT-25	28vdo	VD1	6g	Ame
AYW	-	AME8550BEEVD260Z	Vdet-IC	2.6V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
AYW	eh	AME8550BEEVD260L	Vdet-IC	2.6V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
AYX	-	AME8550AEEVD270Y	Vdet-IC	2.7V±2%, -Reset ODO	TSOT-25	28za	VD1	6g	Ame
AYX	-	AME8550AEEVD270Z	Vdet-IC	2.7V±2%, -Reset ODO	SOT-25	28za	VD1	6g	Ame
AYX	-	XC6211C282MR	LVR-IC	LDO, 2.8V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYX	-	XC6501D281MR-G	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYX	eh	AME8550AEEVD270L	Vdet-IC	2.7V±2%, -Reset ODO	SOT-25	28za	VD1	6g	Ame
AYY	-	AME8550BEEVD270Y	Vdet-IC	2.7V±2%, -Reset ODO	TSOT-25	28vdo	VD1	6g	Ame
AYY	-	AME8550BEEVD270Z	Vdet-IC	2.7V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
AYY	-	XC6211C292MR	LVR-IC	LDO, 2.9V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYY	-	XC6501D291MR-G	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AYY	eh	AME8550BEEVD270L	Vdet-IC	2.7V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
AYZ	-	XC6211C302MR	LVR-IC	LDO, 3.0V±2%, 240mA, -CE, PUR	SOT-25	28vc	VR4	6g	Tor
AYZ	-	XC6501D301MR-G	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
AZ	-	PT7M7812RTA	Vdet-IC	2.63V±1.5%, +Reset PPO, -MR	SOT-23-5	28vd2	VD5	6k	Pti
AZ	-	TC1014-2.8VRX	LVR-IC	LDO, 2.8V±2%, 50mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
AZ	ea	PT7M7812RTAE	Vdet-IC	2.63V±1.5%, +Reset PPO, -MR, Lead free	SOT-23-5	28vd2	VD5	6k	Pti
AZ-	-	RT9013-30PU5	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6g	Rct
AZ8	-	XC6211D092MR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZ9	-	XC6211D102MR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZA	-	XC6211D112MR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZB	-	XC6211D122MR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZC	-	XC6211D132MR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZD	-	XC6211D142MR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZE	-	XC6211D152MR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZF	-	AME8550BEEVD190Y	Vdet-IC	1.9V±2%, -Reset ODO	TSOT-25	28vdo	VD1	6g	Ame
AZF	-	AME8550BEEVD190Z	Vdet-IC	1.9V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
AZF	-	XC6211D162MR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZF	eh	AME8550BEEVD190L	Vdet-IC	1.9V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AZH	-	XC6211D172MR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZK	-	AME8550AEEVD190Y	Vdet-IC	1.9V±2%, -Reset ODO	TSOT-25	28za	VD1	6g	Ame
AZK	-	AME8550AEEVD190Z	Vdet-IC	1.9V±2%, -Reset ODO	SOT-25	28za	VD1	6g	Ame
AZK	-	XC6211D182MR	LVR-IC	LDO, 1.8V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZK	eh	AME8550AEEVD190L	Vdet-IC	1.9V±2%, -Reset ODO	SOT-25	28za	VD1	6g	Ame
AZL	-	XC6211D192MR	LVR-IC	LDO, 1.9V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZM	-	XC6211D202MR	LVR-IC	LDO, 2.0V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZN	-	XC6211D212MR	LVR-IC	LDO, 2.1V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZP	-	XC6211D222MR	LVR-IC	LDO, 2.2V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZR	-	XC6211D232MR	LVR-IC	LDO, 2.3V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZS	-	XC6211D242MR	LVR-IC	LDO, 2.4V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZT	-	XC6211D252MR	LVR-IC	LDO, 2.5V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZU	-	XC6211D262MR	LVR-IC	LDO, 2.6V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZV	-	XC6211D272MR	LVR-IC	LDO, 2.7V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZX	-	AME8550BEEVD420Y	Vdet-IC	4.2V±2%, -Reset ODO	TSOT-25	28vdo	VD1	6g	Ame
AZX	-	AME8550BEEVD420Z	Vdet-IC	4.2V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
AZX	-	XC6211D282MR	LVR-IC	LDO, 2.8V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZX	eh	AME8550BEEVD420L	Vdet-IC	4.2V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
AZY	-	XC6211D292MR	LVR-IC	LDO, 2.9V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
AZZ	-	XC6211D302MR	LVR-IC	LDO, 3.0V±2%, 240mA, -CE	SOT-25	28vc	VR4	6g	Tor
B0	-	PI74STX1G00CX	CMOS-Log	2-input NAND gate	SC-70-5	28	Log1	6a	Per
B0	-	PI74STX1G00TX	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6a	Per
B0	-	R1111N301A	LVR-IC	LDO, Low noise, 3.0V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
B0	-	TC1015-4.0VRX	LVR-IC	LDO, 4.0V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
B0	ea	RN5VD10AA	Vdet-IC	1.0V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
B0	eu	BL8555-20LQ	LVR-IC	LDO, 2.0V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B0	eu	BL8555-20LRA	LVR-IC	LDO, 2.0V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B0	eu	BL8555-20LRB	LVR-IC	LDO, 2.0V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B0	eu	LR8555-20LQ	LVR-IC	LDO, 2.0V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B0	eu	LR8555-20LRA	LVR-IC	LDO, 2.0V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B0	eu	LR8555-20LRB	LVR-IC	LDO, 2.0V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B0	fg	BL8555-30LQ	LVR-IC	LDO, 3.0V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B0	fg	BL8555-30LRA	LVR-IC	LDO, 3.0V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B0	fg	BL8555-30LRB	LVR-IC	LDO, 3.0V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B0	fg	LR8555-30LQ	LVR-IC	LDO, 3.0V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B0	fg	LR8555-30LRA	LVR-IC	LDO, 3.0V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B0	fg	LR8555-30LRB	LVR-IC	LDO, 3.0V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B0	fh	BL8555-40LQ	LVR-IC	LDO, 4.0V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B0	fh	BL8555-40LRA	LVR-IC	LDO, 4.0V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B0	fh	BL8555-40LRB	LVR-IC	LDO, 4.0V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B0	fh	LR8555-40LQ	LVR-IC	LDO, 4.0V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B0	fh	LR8555-40LRA	LVR-IC	LDO, 4.0V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B0	fh	LR8555-40LRB	LVR-IC	LDO, 4.0V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B0	fi	BL8555-50LQ	LVR-IC	LDO, 5.0V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B0	fi	BL8555-50LRA	LVR-IC	LDO, 5.0V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B0	fi	BL8555-50LRB	LVR-IC	LDO, 5.0V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B0	fi	LR8555-50LQ	LVR-IC	LDO, 5.0V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B0	fi	LR8555-50LRA	LVR-IC	LDO, 5.0V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B0	fi	LR8555-50LRB	LVR-IC	LDO, 5.0V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B0	fk	BL8555-30BQ	LVR-IC	LDO, 3.0V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B0	fk	BL8555-30BRA	LVR-IC	LDO, 3.0V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B0	fk	BL8555-30BRB	LVR-IC	LDO, 3.0V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B0	fk	LR8555-30BQ	LVR-IC	LDO, 3.0V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B0	fk	LR8555-30BRA	LVR-IC	LDO, 3.0V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B0	fk	LR8555-30BRB	LVR-IC	LDO, 3.0V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B0	fm	BL8555-40BQ	LVR-IC	LDO, 4.0V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B0	fm	BL8555-40BRA	LVR-IC	LDO, 4.0V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B0	fm	BL8555-40BRB	LVR-IC	LDO, 4.0V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B0	fm	LR8555-40BQ	LVR-IC	LDO, 4.0V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B0	fm	LR8555-40BRA	LVR-IC	LDO, 4.0V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B0	fm	LR8555-40BRB	LVR-IC	LDO, 4.0V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B0	fn	BL8555-50BQ	LVR-IC	LDO, 5.0V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B0	fn	BL8555-50BRA	LVR-IC	LDO, 5.0V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B0	fn	BL8555-50BRB	LVR-IC	LDO, 5.0V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B0	fn	LR8555-50BQ	LVR-IC	LDO, 5.0V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B0	fn	LR8555-50BRA	LVR-IC	LDO, 5.0V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B0	fn	LR8555-50BRB	LVR-IC	LDO, 5.0V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B0	fp	BL8555-20BQ	LVR-IC	LDO, 2.0V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B0	fp	BL8555-20BRA	LVR-IC	LDO, 2.0V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B0	fp	BL8555-20BRB	LVR-IC	LDO, 2.0V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B0	fp	LR8555-20BQ	LVR-IC	LDO, 2.0V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B0	fp	LR8555-20BRA	LVR-IC	LDO, 2.0V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B0	fp	LR8555-20BRB	LVR-IC	LDO, 2.0V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B0-	-	RT9013-31PU5	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6g	Rct
B00	-	R1152N100B	LVR-IC	Boost, 10V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B00	ej	XC6115A131MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B001	-	R3117Q072C	Vdet-IC	0.7V±15mV, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B002	-	R3117Q082C	Vdet-IC	0.8V±15mV, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B003	-	R3117Q092C	Vdet-IC	0.9V±15mV, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B004	-	R3117Q102C	Vdet-IC	1.0V±15mV, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B005	-	R3117Q112C	Vdet-IC	1.1V±15mV, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B006	-	R3117Q122C	Vdet-IC	1.2V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B007	-	R3117Q132C	Vdet-IC	1.3V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B008	-	R3117Q142C	Vdet-IC	1.4V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B009	-	R3117Q152C	Vdet-IC	1.5V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B01	-	R1152N101B	LVR-IC	Boost, 10.1V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B01	ej	XC6115A132MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B010	-	R3117Q162C	Vdet-IC	1.6V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B011	-	R3117Q172C	Vdet-IC	1.7V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B012	-	R3117Q182C	Vdet-IC	1.8V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B013	-	R3117Q192C	Vdet-IC	1.9V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B014	-	R3117Q202C	Vdet-IC	2.0V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B015	-	R3117Q212C	Vdet-IC	2.1V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B016	-	R3117Q222C	Vdet-IC	2.2V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B017	-	R3117Q232C	Vdet-IC	2.3V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B018	-	R3117Q242C	Vdet-IC	2.4V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B019	-	R3117Q252C	Vdet-IC	2.5V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B02	-	R1152N102B	LVR-IC	Boost, 10.2V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B02	ej	XC6115A133MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B020	-	R3117Q262C	Vdet-IC	2.6V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B021	-	R3117Q272C	Vdet-IC	2.7V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B022	-	R3117Q282C	Vdet-IC	2.8V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B023	-	R3117Q292C	Vdet-IC	2.9V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B024	-	R3117Q302C	Vdet-IC	3.0V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B025	-	R3117Q312C	Vdet-IC	3.1V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B026	-	R3117Q322C	Vdet-IC	3.2V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B027	-	R3117Q332C	Vdet-IC	3.3V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B028	-	R3117Q342C	Vdet-IC	3.4V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B029	-	R3117Q352C	Vdet-IC	3.5V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B03	-	R1152N103B	LVR-IC	Boost, 10.3V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B03	ej	XC6115A134MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B030	-	R3117Q362C	Vdet-IC	3.6V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B031	-	R3117Q372C	Vdet-IC	3.7V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B032	-	R3117Q382C	Vdet-IC	3.8V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B033	-	R3117Q392C	Vdet-IC	3.9V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B034	-	R3117Q402C	Vdet-IC	4.0V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B035	-	R3117Q412C	Vdet-IC	4.1V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B036	-	R3117Q422C	Vdet-IC	4.2V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B037	-	R3117Q432C	Vdet-IC	4.3V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B038	-	R3117Q442C	Vdet-IC	4.4V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B039	-	R3117Q452C	Vdet-IC	4.5V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B04	-	R1152N104B	LVR-IC	Boost, 10.4V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B04	ej	XC6115A135MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B040	-	R3117Q462C	Vdet-IC	4.6V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B041	-	R3117Q472C	Vdet-IC	4.7V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B042	-	R3117Q482C	Vdet-IC	4.8V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B043	-	R3117Q492C	Vdet-IC	4.9V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B044	-	R3117Q502C	Vdet-IC	5.0V±1%, -Reset PPO, Sense	SC-88A	28rs	VD12	6ma	Ric
B05	-	R1152N105B	LVR-IC	Boost, 10.5V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B05	ej	XC6115A136MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B06	-	R1152N106B	LVR-IC	Boost, 10.6V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B06	ej	XC6115A137MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B07	-	R1152N107B	LVR-IC	Boost, 10.7V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B07	ej	XC6115A138MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B08	-	R1152N108B	LVR-IC	Boost, 10.8V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B08	-	RP110N081C	LVR-IC	LDO, 0.8V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B08	-	SN74AHTC1G08DBV	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6g	Ti
B08	ej	XC6115A139MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B09	-	R1152N109B	LVR-IC	Boost, 10.9V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B09	-	RP110N091C	LVR-IC	LDO, 0.9V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B09	ej	XC6115A140MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0A	-	R3114N071A	Vdet-IC	0.7V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0A	-	XC6108C10AMR	Vdet-IC	1.0V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B0A	ej	XC6115A141MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0B	-	R3114N081A	Vdet-IC	0.8V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0B	-	XC6108C10BMR	Vdet-IC	1.0V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B0B	ej	XC6115A142MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0C	-	R3114N091A	Vdet-IC	0.9V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0C	-	XC6108C10CMR	Vdet-IC	1.0V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B0C	ej	XC6115A143MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0D	-	R3114N101A	Vdet-IC	1.0V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0D	-	XC6108C10DMR	Vdet-IC	1.0V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B0D	ej	XC6115A144MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0E	-	R3114N111A	Vdet-IC	1.1V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0E	ej	XC6115A145MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0F	-	R3114N121A	Vdet-IC	1.2V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0F	ec	XC6115A116MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0F	ej	XC6115A146MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0G	-	R3114N131A	Vdet-IC	1.3V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0H	-	R3114N141A	Vdet-IC	1.4V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0H	ec	XC6115A117MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0H	ej	XC6115A147MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0J	-	R3114N151A	Vdet-IC	1.5V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0K	-	R3114N161A	Vdet-IC	1.6V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0K	ec	XC6115A118MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0K	ej	XC6115A148MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0L	-	R3114N171A	Vdet-IC	1.7V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0L	ec	XC6115A119MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0L	ej	XC6115A149MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0M	-	R3114N181A	Vdet-IC	1.8V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0M	ec	XC6115A120MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0M	ej	XC6115A150MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0N	-	R3114N191A	Vdet-IC	1.9V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0N	ec	XC6115A121MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0P	-	R3114N201A	Vdet-IC	2.0V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0P	ec	XC6115A122MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0Q	-	R3114N211A	Vdet-IC	2.1V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0R	-	R3114N221A	Vdet-IC	2.2V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0R	ec	XC6115A123MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0S	-	R3114N231A	Vdet-IC	2.3V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0S	ec	XC6115A124MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0T	-	R3114N241A	Vdet-IC	2.4V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0T	ec	XC6115A125MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0U	-	R3114N251A	Vdet-IC	2.5V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0U	ec	XC6115A126MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0V	-	R3114N261A	Vdet-IC	2.6V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0V	ec	XC6115A127MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0W	-	R3114N271A	Vdet-IC	2.7V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0X	-	R3114N281A	Vdet-IC	2.8V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0X	ec	XC6115A128MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0Y	-	R3114N291A	Vdet-IC	2.9V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0Y	ec	XC6115A129MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B0Z	-	R3114N301A	Vdet-IC	3V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
B0Z	ec	XC6115A130MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
b1	-	BD45E301G-M	Vdet-IC	3.0V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
B1	-	BD4745G	Vdet-IC	4.5V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
B1	-	R1111N311A	LVR-IC	LDO, Low noise, 3.1V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
B1	-	TC1015-2.5VRX	LVR-IC	LDO, 2.5V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
B1	ea	RN5VD11AA	Vdet-IC	1.1V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
B1	eu	BL8555-21LQ	LVR-IC	LDO, 2.1V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B1	eu	BL8555-21LRA	LVR-IC	LDO, 2.1V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B1	eu	BL8555-21LRB	LVR-IC	LDO, 2.1V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B1	eu	LR8555-21LQ	LVR-IC	LDO, 2.1V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B1	eu	LR8555-21LRA	LVR-IC	LDO, 2.1V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B1	eu	LR8555-21LRB	LVR-IC	LDO, 2.1V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B1	fg	BL8555-31LQ	LVR-IC	LDO, 3.1V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B1	fg	BL8555-31LRA	LVR-IC	LDO, 3.1V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B1	fg	BL8555-31LRB	LVR-IC	LDO, 3.1V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B1	fg	LR8555-31LQ	LVR-IC	LDO, 3.1V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B1	fg	LR8555-31LRA	LVR-IC	LDO, 3.1V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B1	fg	LR8555-31LRB	LVR-IC	LDO, 3.1V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B1	fh	BL8555-41LQ	LVR-IC	LDO, 4.1V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B1	fh	BL8555-41LRA	LVR-IC	LDO, 4.1V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B1	fh	BL8555-41LRB	LVR-IC	LDO, 4.1V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B1	fh	LR8555-41LQ	LVR-IC	LDO, 4.1V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B1	fh	LR8555-41LRA	LVR-IC	LDO, 4.1V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B1	fh	LR8555-41LRB	LVR-IC	LDO, 4.1V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B1	fk	BL8555-31BQ	LVR-IC	LDO, 3.1V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B1	fk	BL8555-31BRA	LVR-IC	LDO, 3.1V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B1	fk	BL8555-31BRB	LVR-IC	LDO, 3.1V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B1	fk	LR8555-31BQ	LVR-IC	LDO, 3.1V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B1	fk	LR8555-31BRA	LVR-IC	LDO, 3.1V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B1	fk	LR8555-31BRB	LVR-IC	LDO, 3.1V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B1	fm	BL8555-41BQ	LVR-IC	LDO, 4.1V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B1	fm	BL8555-41BRA	LVR-IC	LDO, 4.1V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B1	fm	BL8555-41BRB	LVR-IC	LDO, 4.1V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B1	fm	LR8555-41BQ	LVR-IC	LDO, 4.1V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B1	fm	LR8555-41BRA	LVR-IC	LDO, 4.1V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B1	fm	LR8555-41BRB	LVR-IC	LDO, 4.1V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B1	fp	BL8555-21BQ	LVR-IC	LDO, 2.1V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B1	fp	BL8555-21BRA	LVR-IC	LDO, 2.1V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B1	fp	BL8555-21BRB	LVR-IC	LDO, 2.1V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B1	fp	LR8555-21BQ	LVR-IC	LDO, 2.1V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B1	fp	LR8555-21BRA	LVR-IC	LDO, 2.1V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B1	fp	LR8555-21BRB	LVR-IC	LDO, 2.1V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B1-	-	RT9013-33PU5	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6g	Rct
B10	-	MIC6270BM5	Comp-IC	Precision, 2..63V, Vofs=<±3mV, Icco=300µA	SOT-23-5	28opa	OP1	6g	Mcr
B10	-	R1152N110B	LVR-IC	Boost, 11V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B10	-	RP110N101C	LVR-IC	LDO, 1.0V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B10	ej	XC6115A231MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B11	-	AIC1747-11GJ5	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
B11	-	R1152N111B	LVR-IC	Boost, 11.1V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B11	-	RP110N111C	LVR-IC	LDO, 1.1V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B11	ej	XC6115A232MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B110	ek	XC6365B101MR	DC-DC-IC	PWM st-down, 100kHz, Adj. 1.5..6V±2.5%, 1A, +CE	SOT-25	28zn	DC18	6g	Tor
B12	-	AIC1747-12GJ5	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
B12	-	LN6206P122KR	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B12	-	R1152N112B	LVR-IC	Boost, 11.2V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B12	-	RP110N121C	LVR-IC	LDO, 1.2V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B12	ej	XC6115A233MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B13	-	AIC1747-13GJ5	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
B13	-	LN6206P132KR	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B13	-	R1152N113B	LVR-IC	Boost, 11.3V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B13	-	RP110N131C	LVR-IC	LDO, 1.3V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B13	ej	XC6115A234MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B14	-	LN6206P142KR	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B14	-	R1152N114B	LVR-IC	Boost, 11.4V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B14	-	RP110N141C	LVR-IC	LDO, 1.4V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B14	ej	XC6115A235MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B15	-	AIC1747-15GJ5	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
B15	-	LN6206P152KR	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B15	-	R1152N115B	LVR-IC	Boost, 11.5V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B15	-	RP110N151C	LVR-IC	LDO, 1.5V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B15	ej	XC6115A236MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B16	-	LN6206P162KR	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B16	-	R1152N116B	LVR-IC	Boost, 11.6V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B16	-	RP110N161C	LVR-IC	LDO, 1.6V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B16	ej	XC6115A237MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B17	-	LN6206P172KR	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B17	-	R1152N117B	LVR-IC	Boost, 11.7V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B17	-	RP110N171C	LVR-IC	LDO, 1.7V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B17	ej	XC6115A238MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B18	-	AIC1747-18GJ5	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
B18	-	LN6206P182KR	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B18	-	R1152N118B	LVR-IC	Boost, 11.8V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B18	-	RP110N181C	LVR-IC	LDO, 1.8V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B18	ej	XC6115A239MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B19	-	LN6206P192KR	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B19	-	R1152N119B	LVR-IC	Boost, 11.9V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B19	-	RP110N191C	LVR-IC	LDO, 1.9V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B19	ej	XC6115A240MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1A	-	R3114N071C	Vdet-IC	0.7V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1A	-	XC6108C11AMR	Vdet-IC	1.1V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B1A	ej	XC6115A241MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1B	-	R3114N081C	Vdet-IC	0.8V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1B	-	XC6108C11BMR	Vdet-IC	1.1V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B1B	ej	XC6115A242MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1C	-	R3114N091C	Vdet-IC	0.9V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1C	-	XC6108C11CMR	Vdet-IC	1.1V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B1C	ej	XC6115A243MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1D	-	R3114N101C	Vdet-IC	1.0V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1D	-	XC6108C11DMR	Vdet-IC	1.1V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B1D	ej	XC6115A244MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1E	-	R3114N111C	Vdet-IC	1.1V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1E	ej	XC6115A245MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1F	-	R3114N121C	Vdet-IC	1.2V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1F	ec	XC6115A216MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1F	ej	XC6115A246MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1G	-	R3114N131C	Vdet-IC	1.3V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1H	-	R3114N141C	Vdet-IC	1.4V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1H	ec	XC6115A217MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1H	ej	XC6115A247MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1J	-	R3114N151C	Vdet-IC	1.5V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1K	-	R3114N161C	Vdet-IC	1.6V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1K	ec	XC6115A218MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1K	ej	XC6115A248MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1L	-	R3114N171C	Vdet-IC	1.7V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1L	ec	XC6115A219MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1L	ej	XC6115A249MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1M	-	R3114N181C	Vdet-IC	1.8V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1M	ec	XC6115A220MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1M	ej	XC6115A250MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1N	-	R3114N191C	Vdet-IC	1.9V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1N	ec	XC6115A221MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1P	-	R3114N201C	Vdet-IC	2.0V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1P	ec	XC6115A222MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1Q	-	R3114N211C	Vdet-IC	2.1V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1R	-	R3114N221C	Vdet-IC	2.2V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1R	ec	XC6115A223MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1S	-	R3114N231C	Vdet-IC	2.3V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1S	ec	XC6115A224MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1T	-	R3114N241C	Vdet-IC	2.4V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1T	ec	XC6115A225MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1U	-	R3114N251C	Vdet-IC	2.5V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1U	ec	XC6115A226MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1V	-	R3114N261C	Vdet-IC	2.6V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1V	ec	XC6115A227MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1W	-	R3114N271C	Vdet-IC	2.7V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1X	-	R3114N281C	Vdet-IC	2.8V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1X	ec	XC6115A228MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1Y	-	R3114N291C	Vdet-IC	2.9V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1Y	ec	XC6115A229MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B1Z	-	R3114N301C	Vdet-IC	3V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
B1Z	ec	XC6115A230MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
b2	-	BD45E311G-M	Vdet-IC	3.1V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
B2	-	BD4746G	Vdet-IC	4.6V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
B2	-	BL8555-12BQ	LVR-IC	LDO, 1.2V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B2	-	BL8555-12BRA	LVR-IC	LDO, 1.2V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B2	-	BL8555-12BRB	LVR-IC	LDO, 1.2V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B2	-	LR8555-12BQ	LVR-IC	LDO, 1.2V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B2	-	LR8555-12BRA	LVR-IC	LDO, 1.2V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B2	-	LR8555-12BRB	LVR-IC	LDO, 1.2V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B2	-	PI74STX1G02CX	CMOS-Log	2-input NOR gate	SC-70-5	28	Log2	6a	Per
B2	-	PI74STX1G02TX	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6a	Per
B2	-	R1111N321A	LVR-IC	LDO, Low noise, 3.2V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
B2	-	TC1015-2.7VRX	LVR-IC	LDO, 2.7V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
B2	ea	BL8555-12LQ	LVR-IC	LDO, 1.2V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B2	ea	BL8555-12LRA	LVR-IC	LDO, 1.2V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B2	ea	BL8555-12LRB	LVR-IC	LDO, 1.2V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B2	ea	LR8555-12LQ	LVR-IC	LDO, 1.2V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B2	ea	LR8555-12LRA	LVR-IC	LDO, 1.2V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B2	ea	LR8555-12LRB	LVR-IC	LDO, 1.2V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B2	ea	RN5VD12AA	Vdet-IC	1.2V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
B2	eu	BL8555-22LQ	LVR-IC	LDO, 2.2V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B2	eu	BL8555-22LRA	LVR-IC	LDO, 2.2V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B2	eu	BL8555-22LRB	LVR-IC	LDO, 2.2V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B2	eu	LR8555-22LQ	LVR-IC	LDO, 2.2V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B2	eu	LR8555-22LRA	LVR-IC	LDO, 2.2V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B2	eu	LR8555-22LRB	LVR-IC	LDO, 2.2V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B2	fg	BL8555-32LQ	LVR-IC	LDO, 3.2V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B2	fg	BL8555-32LRA	LVR-IC	LDO, 3.2V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B2	fg	BL8555-32LRB	LVR-IC	LDO, 3.2V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B2	fg	LR8555-32LQ	LVR-IC	LDO, 3.2V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B2	fg	LR8555-32LRA	LVR-IC	LDO, 3.2V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B2	fg	LR8555-32LRB	LVR-IC	LDO, 3.2V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B2	fh	BL8555-42LQ	LVR-IC	LDO, 4.2V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B2	fh	BL8555-42LRA	LVR-IC	LDO, 4.2V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B2	fh	BL8555-42LRB	LVR-IC	LDO, 4.2V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B2	fh	LR8555-42LQ	LVR-IC	LDO, 4.2V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B2	fh	LR8555-42LRA	LVR-IC	LDO, 4.2V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B2	fh	LR8555-42LRB	LVR-IC	LDO, 4.2V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B2	fk	BL8555-32BQ	LVR-IC	LDO, 3.2V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B2	fk	BL8555-32BRA	LVR-IC	LDO, 3.2V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B2	fk	BL8555-32BRB	LVR-IC	LDO, 3.2V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B2	fk	LR8555-32BQ	LVR-IC	LDO, 3.2V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B2	fk	LR8555-32BRA	LVR-IC	LDO, 3.2V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B2	fk	LR8555-32BRB	LVR-IC	LDO, 3.2V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B2	fm	BL8555-42BQ	LVR-IC	LDO, 4.2V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B2	fm	BL8555-42BRA	LVR-IC	LDO, 4.2V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B2	fm	BL8555-42BRB	LVR-IC	LDO, 4.2V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B2	fm	LR8555-42BQ	LVR-IC	LDO, 4.2V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B2	fm	LR8555-42BRA	LVR-IC	LDO, 4.2V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B2	fm	LR8555-42BRB	LVR-IC	LDO, 4.2V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B2	fp	BL8555-22BQ	LVR-IC	LDO, 2.2V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B2	fp	BL8555-22BRA	LVR-IC	LDO, 2.2V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B2	fp	BL8555-22BRB	LVR-IC	LDO, 2.2V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B2	fp	LR8555-22BQ	LVR-IC	LDO, 2.2V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B2	fp	LR8555-22BRA	LVR-IC	LDO, 2.2V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B2	fp	LR8555-22BRB	LVR-IC	LDO, 2.2V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B2-	-	RT9198-26PU5	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	SC-70-5	28xm	VR4	6a	Rct
B20	-	AIC1747-20GJ5	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
B20	-	LN6206P202KR	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B20	-	R1152N120B	LVR-IC	Boost, 12V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B20	-	RP110N201C	LVR-IC	LDO, 2.0V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B20	ej	XC6115A331MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B21	-	LN6206P212KR	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B21	-	RP110N211C	LVR-IC	LDO, 2.1V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B21	ej	XC6115A332MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B210	ek	XC6365B102MR	DC-DC-IC	PWM st-down, 180kHz, Adj. 1.5..6V±2.5%, 1A, +CE	SOT-25	28zn	DC18	6g	Tor
B22	-	LN6206P222KR	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B22	-	RP110N221C	LVR-IC	LDO, 2.2V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B22	ej	XC6115A333MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B23	-	LN6206P232KR	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B23	-	RP110N231C	LVR-IC	LDO, 2.3V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B23	ej	XC6115A334MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B24	-	LN6206P242KR	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B24	-	RP110N241C	LVR-IC	LDO, 2.4V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B24	ej	XC6115A335MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
b25	-	74CBTLV1G125GV	CMOS-Log	Bus buffer gate with 3-state output	SOT753	28	Log14	6a	Nxp
B25	-	AIC1747-25GJ5	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
B25	-	LN6206P252KR	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B25	-	R1152N025B	LVR-IC	Boost, 2.5V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B25	-	RP110N251C	LVR-IC	LDO, 2.5V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B25	ej	XC6115A336MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B26	-	LN6206P262KR	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B26	-	R1152N026B	LVR-IC	Boost, 2.6V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B26	-	RP110N261C	LVR-IC	LDO, 2.6V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B26	ej	XC6115A337MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B27	-	AIC1747-27GJ5	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
B27	-	LN6206P272KR	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-353	28g	VR1	6g	Inw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B27	-	R1152N027B	LVR-IC	Boost, 2.7V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B27	-	RP110N271C	LVR-IC	LDO, 2.7V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B27	ej	XC6115A338MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B28	-	LN6206P282KR	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B28	-	R1152N028B	LVR-IC	Boost, 2.8V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B28	-	RP110N281C	LVR-IC	LDO, 2.8V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B28	ej	XC6115A339MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B29	-	LN6206P292KR	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B29	-	R1152N029B	LVR-IC	Boost, 2.9V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B29	-	RP110N291C	LVR-IC	LDO, 2.9V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B29	ej	XC6115A340MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2A	-	XC6108C12AMR	Vdet-IC	1.2V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B2A	ej	XC6115A341MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2B	-	XC6108C12BMR	Vdet-IC	1.2V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B2B	ej	XC6115A342MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2C	-	XC6108C12CMR	Vdet-IC	1.2V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B2C	ej	XC6115A343MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2D	-	XC6108C12DMR	Vdet-IC	1.2V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B2D	ej	XC6115A344MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2E	ej	XC6115A345MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2F	ec	XC6115A316MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2F	ej	XC6115A346MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2H	ec	XC6115A317MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2H	ej	XC6115A347MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2J	-	AIC1747-285GJ5	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
B2K	ec	XC6115A318MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2K	ej	XC6115A348MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2L	ec	XC6115A319MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2L	ej	XC6115A349MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2M	ec	XC6115A320MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2M	ej	XC6115A350MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2N	ec	XC6115A321MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2P	ec	XC6115A322MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2R	ec	XC6115A323MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2S	ec	XC6115A324MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2T	ec	XC6115A325MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2U	ec	XC6115A326MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2V	ec	XC6115A327MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2X	ec	XC6115A328MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2Y	ec	XC6115A329MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B2Z	ec	XC6115A330MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
b3	-	BD45E321G-M	Vdet-IC	3.2V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
B3	-	BD4727G	Vdet-IC	2.7V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
B3	-	BL8555-13BQ	LVR-IC	LDO, 1.3V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B3	-	BL8555-13BRA	LVR-IC	LDO, 1.3V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B3	-	BL8555-13BRB	LVR-IC	LDO, 1.3V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B3	-	LR8555-13BQ	LVR-IC	LDO, 1.3V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B3	-	LR8555-13BRA	LVR-IC	LDO, 1.3V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B3	-	LR8555-13BRB	LVR-IC	LDO, 1.3V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B3	-	R1111N331A	LVR-IC	LDO, Low noise, 3.3V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
B3	-	TC1015-3.0VRX	LVR-IC	LDO, 3.0V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
B3	ea	BL8555-13LQ	LVR-IC	LDO, 1.3V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B3	ea	BL8555-13LRA	LVR-IC	LDO, 1.3V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B3	ea	BL8555-13LRB	LVR-IC	LDO, 1.3V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B3	ea	LR8555-13LQ	LVR-IC	LDO, 1.3V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B3	ea	LR8555-13LRA	LVR-IC	LDO, 1.3V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B3	ea	LR8555-13LRB	LVR-IC	LDO, 1.3V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B3	ea	RN5VD13AA	Vdet-IC	1.3V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
B3	eu	BL8555-23LQ	LVR-IC	LDO, 2.3V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B3	eu	BL8555-23LRA	LVR-IC	LDO, 2.3V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B3	eu	BL8555-23LRB	LVR-IC	LDO, 2.3V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B3	eu	LR8555-23LQ	LVR-IC	LDO, 2.3V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B3	eu	LR8555-23LRA	LVR-IC	LDO, 2.3V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B3	eu	LR8555-23LRB	LVR-IC	LDO, 2.3V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B3	fg	BL8555-33LQ	LVR-IC	LDO, 3.3V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B3	fg	BL8555-33LRA	LVR-IC	LDO, 3.3V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B3	fg	BL8555-33LRB	LVR-IC	LDO, 3.3V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B3	fg	LR8555-33LQ	LVR-IC	LDO, 3.3V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B3	fg	LR8555-33LRA	LVR-IC	LDO, 3.3V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B3	fg	LR8555-33LRB	LVR-IC	LDO, 3.3V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B3	fh	BL8555-43LQ	LVR-IC	LDO, 4.3V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B3	fh	BL8555-43LRA	LVR-IC	LDO, 4.3V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B3	fh	BL8555-43LRB	LVR-IC	LDO, 4.3V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B3	fh	LR8555-43LQ	LVR-IC	LDO, 4.3V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B3	fh	LR8555-43LRA	LVR-IC	LDO, 4.3V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B3	fh	LR8555-43LRB	LVR-IC	LDO, 4.3V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B3	fk	BL8555-33BQ	LVR-IC	LDO, 3.3V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B3	fk	BL8555-33BRA	LVR-IC	LDO, 3.3V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B3	fk	BL8555-33BRB	LVR-IC	LDO, 3.3V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B3	fk	LR8555-33BQ	LVR-IC	LDO, 3.3V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B3	fk	LR8555-33BRA	LVR-IC	LDO, 3.3V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B3	fk	LR8555-33BRB	LVR-IC	LDO, 3.3V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B3	fm	BL8555-43BQ	LVR-IC	LDO, 4.3V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B3	fm	BL8555-43BRA	LVR-IC	LDO, 4.3V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B3	fm	BL8555-43BRB	LVR-IC	LDO, 4.3V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B3	fm	LR8555-43BQ	LVR-IC	LDO, 4.3V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B3	fm	LR8555-43BRA	LVR-IC	LDO, 4.3V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B3	fm	LR8555-43BRB	LVR-IC	LDO, 4.3V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B3	fp	BL8555-23BQ	LVR-IC	LDO, 2.3V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B3	fp	BL8555-23BRA	LVR-IC	LDO, 2.3V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B3	fp	BL8555-23BRB	LVR-IC	LDO, 2.3V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B3	fp	LR8555-23BQ	LVR-IC	LDO, 2.3V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B3	fp	LR8555-23BRA	LVR-IC	LDO, 2.3V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B3	fp	LR8555-23BRB	LVR-IC	LDO, 2.3V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B3-	-	RT9198T-28PU5R	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SC-70-5	28xm	VR4	6a	Rct
B30	-	AIC1747-30GJ5	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
B30	-	LN6206P302KR	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B30	-	R1152N030B	LVR-IC	Boost, 3.0V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B30	-	RP110N301C	LVR-IC	LDO, 3.0V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B30	ej	XC6115A431MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B31	-	LN6206P311KR	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B31	-	R1152N031B	LVR-IC	Boost, 3.1V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B31	-	RP110N311C	LVR-IC	LDO, 3.1V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B31	ej	XC6115A432MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B310	ek	XC6365B103MR	DC-DC-IC	PWM st-down, 300kHz, Adj. 1.5..6V±2.5%, 1A, +CE	SOT-25	28zn	DC18	6g	Tor
B32	-	LN6206P322KR	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B32	-	R1152N032B	LVR-IC	Boost, 3.2V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B32	-	RP110N321C	LVR-IC	LDO, 3.2V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B32	ej	XC6115A433MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B33	-	AIC1747-33GJ5	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
B33	-	LN6206P332KR	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B33	-	R1152N033B	LVR-IC	Boost, 3.3V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B33	-	RP110N331C	LVR-IC	LDO, 3.3V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B33	ej	XC6115A434MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B34	-	LN6206P342KR	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B34	-	OPA634N	Op-IC	Wide-band, single-supply +3..+5V, 150MHz, Iout=80mA	SOT-23-5	28opa	OP1	6a	Bb
B34	-	R1152N034B	LVR-IC	Boost, 3.4V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B34	-	RP110N341C	LVR-IC	LDO, 3.4V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B34	ej	XC6115A435MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B35	-	AIC1747-35GJ5	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
B35	-	LN6206P352KR	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B35	-	R1152N035B	LVR-IC	Boost, 3.5V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B35	-	RP110N351C	LVR-IC	LDO, 3.5V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B35	ej	XC6115A436MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B36	-	LN6206P362KR	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B36	-	R1152N036B	LVR-IC	Boost, 3.6V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B36	-	RP110N361C	LVR-IC	LDO, 3.6V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B36	ej	XC6115A437MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B37	-	AIC1747-37GJ5	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
B37	-	LN6206P372KR	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B37	-	R1152N037B	LVR-IC	Boost, 3.7V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B37	-	RP110N121C5	LVR-IC	LDO, 1.25V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B37	ej	XC6115A438MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B38	-	AIC1747-38GJ5	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
B38	-	LN6206P382KR	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B38	-	R1152N038B	LVR-IC	Boost, 3.8V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B38	-	RP110N181C5	LVR-IC	LDO, 1.85V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B38	ej	XC6115A439MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B39	-	LN6206P392KR	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B39	-	R1152N039B	LVR-IC	Boost, 3.9V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B39	-	RP110N281C5	LVR-IC	LDO, 2.85V±1%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
B39	ej	XC6115A440MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3A	-	XC6108C13AMR	Vdet-IC	1.3V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B3A	ej	XC6115A441MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3B	-	XC6108C13BMR	Vdet-IC	1.3V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B3B	ej	XC6115A442MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3C	-	XC6108C13CMR	Vdet-IC	1.3V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B3C	ej	XC6115A443MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3D	-	XC6108C13DMR	Vdet-IC	1.3V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B3D	ej	XC6115A444MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3E	ej	XC6115A445MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3F	ec	XC6115A416MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3F	ej	XC6115A446MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3H	ec	XC6115A417MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3H	ej	XC6115A447MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3K	ec	XC6115A418MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3K	ej	XC6115A448MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3L	ec	XC6115A419MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3L	ej	XC6115A449MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3M	ec	XC6115A420MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3M	ej	XC6115A450MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3N	ec	XC6115A421MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3P	ec	XC6115A422MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3R	ec	XC6115A423MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3S	ec	XC6115A424MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3T	ec	XC6115A425MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3U	ec	XC6115A426MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3V	ec	XC6115A427MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3X	ec	XC6115A428MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3Y	ec	XC6115A429MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B3Z	ec	XC6115A430MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
b4	-	BD45E331G-M	Vdet-IC	3.3V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
B4	-	BD4733G	Vdet-IC	3.3V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
B4	-	BL8555-14BQ	LVR-IC	LDO, 1.4V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B4	-	BL8555-14BRA	LVR-IC	LDO, 1.4V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B4	-	BL8555-14BRB	LVR-IC	LDO, 1.4V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B4	-	LR8555-14BQ	LVR-IC	LDO, 1.4V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B4	-	LR8555-14BRA	LVR-IC	LDO, 1.4V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B4	-	LR8555-14BRB	LVR-IC	LDO, 1.4V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B4	-	PI74STX1G04CX	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	Per
B4	-	PI74STX1G04TX	CMOS-Log	Inverter	SOT-23-5	28	Log6	6a	Per
B4	-	R1111N341A	LVR-IC	LDO, Low noise, 3.4V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
B4	ea	BL8555-14LQ	LVR-IC	LDO, 1.4V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B4	ea	BL8555-14LRA	LVR-IC	LDO, 1.4V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B4	ea	BL8555-14LRB	LVR-IC	LDO, 1.4V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B4	ea	LR8555-14LQ	LVR-IC	LDO, 1.4V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B4	ea	LR8555-14LRA	LVR-IC	LDO, 1.4V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B4	ea	LR8555-14LRB	LVR-IC	LDO, 1.4V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B4	ea	RN5VD14AA	Vdet-IC	1.4V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
B4	eu	BL8555-24LQ	LVR-IC	LDO, 2.4V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B4	eu	BL8555-24LRA	LVR-IC	LDO, 2.4V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B4	eu	BL8555-24LRB	LVR-IC	LDO, 2.4V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B4	eu	LR8555-24LQ	LVR-IC	LDO, 2.4V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B4	eu	LR8555-24LRA	LVR-IC	LDO, 2.4V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B4	eu	LR8555-24LRB	LVR-IC	LDO, 2.4V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B4	fg	BL8555-34LQ	LVR-IC	LDO, 3.4V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B4	fg	BL8555-34LRA	LVR-IC	LDO, 3.4V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B4	fg	BL8555-34LRB	LVR-IC	LDO, 3.4V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B4	fg	LR8555-34LQ	LVR-IC	LDO, 3.4V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B4	fg	LR8555-34LRA	LVR-IC	LDO, 3.4V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B4	fg	LR8555-34LRB	LVR-IC	LDO, 3.4V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B4	fh	BL8555-44LQ	LVR-IC	LDO, 4.4V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B4	fh	BL8555-44LRA	LVR-IC	LDO, 4.4V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B4	fh	BL8555-44LRB	LVR-IC	LDO, 4.4V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B4	fh	LR8555-44LQ	LVR-IC	LDO, 4.4V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B4	fh	LR8555-44LRA	LVR-IC	LDO, 4.4V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B4	fh	LR8555-44LRB	LVR-IC	LDO, 4.4V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B4	fk	BL8555-34BQ	LVR-IC	LDO, 3.4V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B4	fk	BL8555-34BRB	LVR-IC	LDO, 3.4V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B4	fk	BL8555-34PBA	LVR-IC	LDO, 3.4V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B4	fk	LR8555-34BQ	LVR-IC	LDO, 3.4V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B4	fk	LR8555-34BRB	LVR-IC	LDO, 3.4V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B4	fk	LR8555-34PBA	LVR-IC	LDO, 3.4V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B4	fm	BL8555-44BQ	LVR-IC	LDO, 4.4V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B4	fm	BL8555-44BRA	LVR-IC	LDO, 4.4V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B4	fm	BL8555-44BRB	LVR-IC	LDO, 4.4V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B4	fm	LR8555-44BQ	LVR-IC	LDO, 4.4V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B4	fm	LR8555-44BRA	LVR-IC	LDO, 4.4V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B4	fm	LR8555-44BRB	LVR-IC	LDO, 4.4V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B4	fp	BL8555-24BQ	LVR-IC	LDO, 2.4V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B4	fp	BL8555-24BRA	LVR-IC	LDO, 2.4V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B4	fp	BL8555-24BRB	LVR-IC	LDO, 2.4V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B4	fp	LR8555-24BQ	LVR-IC	LDO, 2.4V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B4	fp	LR8555-24BRA	LVR-IC	LDO, 2.4V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B4	fp	LR8555-24BRB	LVR-IC	LDO, 2.4V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B4-	-	RT9198T-33PU5	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SC-70-5	28xm	VR4	6a	Rct
B40	-	LN6206P402KR	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B40	-	R1152N040B	LVR-IC	Boost, 4.0V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B40	ej	XC6115A531MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B41	-	LN6206P412KR	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B41	-	R1152N041B	LVR-IC	Boost, 4.1V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B41	ej	XC6115A532MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B410	ek	XC6365B105MR	DC-DC-IC	PWM st-down, 500kHz, Adj. 1.5..6V±2.5%, 1A, +CE	SOT-25	28zn	DC18	6g	Tor
B42	-	LN6206P422KR	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B42	-	OPA342NA	Op-IC	Lo-power, Rail-to-Rail, 2.5..5.5V, 1MHz, 1V/µs	SOT-23-5	28opa	OP1	6a	Bb
B42	-	R1152N042B	LVR-IC	Boost, 4.2V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B42	ej	XC6115A533MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B43	-	LN6206P432KR	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B43	-	OPA343NA	Op-IC	Single-supply, Rail-to-Rail, 2.5..5.5V, 5.5MHz, 6V/µs	SOT-23-5	28opa	OP1	6a	Bb
B43	-	R1152N043B	LVR-IC	Boost, 4.3V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B43	ej	XC6115A534MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B44	-	LN6206P442KR	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B44	-	R1152N044B	LVR-IC	Boost, 4.4V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B44	ej	XC6115A535MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B45	-	LN6206P452KR	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B45	-	R1152N045B	LVR-IC	Boost, 4.5V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B45	ej	XC6115A536MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B46	-	LN6206P462KR	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B46	-	R1152N046B	LVR-IC	Boost, 4.6V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B46	ej	XC6115A537MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B47	-	LN6206P472KR	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B47	-	R1152N047B	LVR-IC	Boost, 4.7V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B47	ej	XC6115A538MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B48	-	LN6206P482KR	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B48	-	R1152N048B	LVR-IC	Boost, 4.8V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B48	ej	XC6115A539MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B49	-	LN6206P492KR	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B49	-	R1152N049B	LVR-IC	Boost, 4.9V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B49	ej	XC6115A540MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4A	-	XC6108C14AMR	Vdet-IC	1.4V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B4A	ej	XC6115A541MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4B	-	XC6108C14BMR	Vdet-IC	1.4V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B4B	ej	XC6115A542MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4C	-	XC6108C14CMR	Vdet-IC	1.4V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B4C	ej	XC6115A543MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4D	-	XC6108C14DMR	Vdet-IC	1.4V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B4D	ej	XC6115A544MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4E	ej	XC6115A545MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4F	ec	XC6115A516MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4F	ej	XC6115A546MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4H	ec	XC6115A517MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4H	ej	XC6115A547MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4K	ec	XC6115A518MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4K	ej	XC6115A548MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4L	ec	XC6115A519MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4L	ej	XC6115A549MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4M	ec	XC6115A520MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4M	ej	XC6115A550MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4N	ec	XC6115A521MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4P	ec	XC6115A522MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B4R	ec	XC6115A523MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4S	ec	XC6115A524MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4T	ec	XC6115A525MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4U	ec	XC6115A526MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4V	ec	XC6115A527MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4X	ec	XC6115A528MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4Y	ec	XC6115A529MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B4Z	ec	XC6115A530MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
b5	-	BD45E341G-M	Vdet-IC	3.4V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
B5	-	BL8555-15BQ	LVR-IC	LDO, 1.5V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B5	-	BL8555-15BRA	LVR-IC	LDO, 1.5V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B5	-	BL8555-15BRB	LVR-IC	LDO, 1.5V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B5	-	LR8555-15BQ	LVR-IC	LDO, 1.5V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B5	-	LR8555-15BRA	LVR-IC	LDO, 1.5V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B5	-	LR8555-15BRB	LVR-IC	LDO, 1.5V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B5	-	R1111N351A	LVR-IC	LDO, Low noise, 3.5V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
B5	-	TC1015-3.3VRX	LVR-IC	LDO, 3.3V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
B5	ea	BL8555-15LQ	LVR-IC	LDO, 1.5V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B5	ea	BL8555-15LRA	LVR-IC	LDO, 1.5V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B5	ea	BL8555-15LRB	LVR-IC	LDO, 1.5V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B5	ea	LR8555-15LQ	LVR-IC	LDO, 1.5V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B5	ea	LR8555-15LRA	LVR-IC	LDO, 1.5V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B5	ea	LR8555-15LRB	LVR-IC	LDO, 1.5V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B5	ea	RN5VD15AA	Vdet-IC	1.5V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
B5	eu	BL8555-25LQ	LVR-IC	LDO, 2.5V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B5	eu	BL8555-25LRA	LVR-IC	LDO, 2.5V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B5	eu	BL8555-25LRB	LVR-IC	LDO, 2.5V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B5	eu	LR8555-25LQ	LVR-IC	LDO, 2.5V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B5	eu	LR8555-25LRA	LVR-IC	LDO, 2.5V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B5	eu	LR8555-25LRB	LVR-IC	LDO, 2.5V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B5	fg	BL8555-35LQ	LVR-IC	LDO, 3.5V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B5	fg	BL8555-35LRA	LVR-IC	LDO, 3.5V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B5	fg	BL8555-35LRB	LVR-IC	LDO, 3.5V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B5	fg	LR8555-35LQ	LVR-IC	LDO, 3.5V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B5	fg	LR8555-35LRA	LVR-IC	LDO, 3.5V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B5	fg	LR8555-35LRB	LVR-IC	LDO, 3.5V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B5	fh	BL8555-45LQ	LVR-IC	LDO, 4.5V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B5	fh	BL8555-45LRA	LVR-IC	LDO, 4.5V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B5	fh	BL8555-45LRB	LVR-IC	LDO, 4.5V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B5	fh	LR8555-45LQ	LVR-IC	LDO, 4.5V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B5	fh	LR8555-45LRA	LVR-IC	LDO, 4.5V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B5	fh	LR8555-45LRB	LVR-IC	LDO, 4.5V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B5	fk	BL8555-35BQ	LVR-IC	LDO, 3.5V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B5	fk	BL8555-35BRA	LVR-IC	LDO, 3.5V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B5	fk	BL8555-35BRB	LVR-IC	LDO, 3.5V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B5	fk	LR8555-35BQ	LVR-IC	LDO, 3.5V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B5	fk	LR8555-35BRA	LVR-IC	LDO, 3.5V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B5	fk	LR8555-35BRB	LVR-IC	LDO, 3.5V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B5	fm	BL8555-45BQ	LVR-IC	LDO, 4.5V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B5	fm	BL8555-45BRA	LVR-IC	LDO, 4.5V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B5	fm	BL8555-45BRB	LVR-IC	LDO, 4.5V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B5	fm	LR8555-45BQ	LVR-IC	LDO, 4.5V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B5	fm	LR8555-45BRA	LVR-IC	LDO, 4.5V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B5	fm	LR8555-45BRB	LVR-IC	LDO, 4.5V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B5	fp	BL8555-25BQ	LVR-IC	LDO, 2.5V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B5	fp	BL8555-25BRA	LVR-IC	LDO, 2.5V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B5	fp	BL8555-25BRB	LVR-IC	LDO, 2.5V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B5	fp	LR8555-25BQ	LVR-IC	LDO, 2.5V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B5	fp	LR8555-25BRA	LVR-IC	LDO, 2.5V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B5	fp	LR8555-25BRB	LVR-IC	LDO, 2.5V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B50	-	LN6206P502KR	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-353	28g	VR1	6g	Inw
B50	-	R1152N050B	LVR-IC	Boost, 5V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B50	ej	XC6115A631MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B51	-	R1152N051B	LVR-IC	Boost, 5.1V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B51	ej	XC6115A632MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B52	-	R1152N052B	LVR-IC	Boost, 5.2V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B52	ej	XC6115A633MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B53	-	R1152N053B	LVR-IC	Boost, 5.3V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B53	ej	XC6115A634MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B54	-	R1152N054B	LVR-IC	Boost, 5.4V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B54	ej	XC6115A635MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B55	-	R1152N055B	LVR-IC	Boost, 5.5V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B55	ej	XC6115A636MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B56	-	R1152N056B	LVR-IC	Boost, 5.6V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B56	ej	XC6115A637MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B57	-	R1152N057B	LVR-IC	Boost, 5.7V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B57	ej	XC6115A638MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B58	-	R1152N058B	LVR-IC	Boost, 5.8V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B58	ej	XC6115A639MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B59	-	R1152N059B	LVR-IC	Boost, 5.9V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B59	ej	XC6115A640MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5A	-	XC6108C15AMR	Vdet-IC	1.5V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B5A	ej	XC6115A641MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5B	-	XC6108C15BMR	Vdet-IC	1.5V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B5B	ej	XC6115A642MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5C	-	XC6108C15CMR	Vdet-IC	1.5V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B5C	ej	XC6115A643MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5D	-	XC6108C15DMR	Vdet-IC	1.5V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B5D	ej	XC6115A644MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5E	ej	XC6115A645MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5F	ec	XC6115A616MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5F	ej	XC6115A646MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5H	ec	XC6115A617MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5H	ej	XC6115A647MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5K	ec	XC6115A618MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5K	ej	XC6115A648MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5L	ec	XC6115A619MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5L	ej	XC6115A649MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5M	ec	XC6115A620MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5M	ej	XC6115A650MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5N	ec	XC6115A621MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5P	ec	XC6115A622MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5R	ec	XC6115A623MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5S	ec	XC6115A624MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5T	ec	XC6115A625MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5U	ec	XC6115A626MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5V	ec	XC6115A627MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5X	ec	XC6115A628MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5Y	ec	XC6115A629MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
B5Z	ec	XC6115A630MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	SOT-25	28xg	VD20	6g	Tor
b6	-	BD45E351G-M	Vdet-IC	3.5V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
B6	-	BL8555-16BQ	LVR-IC	LDO, 1.6V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B6	-	BL8555-16BRA	LVR-IC	LDO, 1.6V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B6	-	BL8555-16BRB	LVR-IC	LDO, 1.6V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B6	-	LR8555-16BQ	LVR-IC	LDO, 1.6V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B6	-	LR8555-16BRA	LVR-IC	LDO, 1.6V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B6	-	LR8555-16BRB	LVR-IC	LDO, 1.6V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B6	-	R1111N361A	LVR-IC	LDO, Low noise, 3.6V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
B6	ea	BL8555-16LQ	LVR-IC	LDO, 1.6V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B6	ea	BL8555-16LRA	LVR-IC	LDO, 1.6V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B6	ea	BL8555-16LRB	LVR-IC	LDO, 1.6V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B6	ea	LR8555-16LQ	LVR-IC	LDO, 1.6V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B6	ea	LR8555-16LRA	LVR-IC	LDO, 1.6V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B6	ea	LR8555-16LRB	LVR-IC	LDO, 1.6V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B6	ea	RN5VD16AA	Vdet-IC	1.6V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
B6	eu	BL8555-26LQ	LVR-IC	LDO, 2.6V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B6	eu	BL8555-26LRA	LVR-IC	LDO, 2.6V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B6	eu	BL8555-26LRB	LVR-IC	LDO, 2.6V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B6	eu	LR8555-26LQ	LVR-IC	LDO, 2.6V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B6	eu	LR8555-26LRA	LVR-IC	LDO, 2.6V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B6	eu	LR8555-26LRB	LVR-IC	LDO, 2.6V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B6	fg	BL8555-36LQ	LVR-IC	LDO, 3.6V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B6	fg	BL8555-36LRA	LVR-IC	LDO, 3.6V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B6	fg	BL8555-36LRB	LVR-IC	LDO, 3.6V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B6	fg	LR8555-36LQ	LVR-IC	LDO, 3.6V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B6	fg	LR8555-36LRA	LVR-IC	LDO, 3.6V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B6	fg	LR8555-36LRB	LVR-IC	LDO, 3.6V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B6	fh	BL8555-46LQ	LVR-IC	LDO, 4.6V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B6	fh	BL8555-46LRA	LVR-IC	LDO, 4.6V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B6	fh	BL8555-46LRB	LVR-IC	LDO, 4.6V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B6	fh	LR8555-46LQ	LVR-IC	LDO, 4.6V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B6	fh	LR8555-46LRA	LVR-IC	LDO, 4.6V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B6	fh	LR8555-46LRB	LVR-IC	LDO, 4.6V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B6	fk	BL8555-36BQ	LVR-IC	LDO, 3.6V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B6	fk	BL8555-36BRA	LVR-IC	LDO, 3.6V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B6	fk	BL8555-36BRB	LVR-IC	LDO, 3.6V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B6	fk	LR8555-36BQ	LVR-IC	LDO, 3.6V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B6	fk	LR8555-36BRA	LVR-IC	LDO, 3.6V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B6	fk	LR8555-36BRB	LVR-IC	LDO, 3.6V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B6	fm	BL8555-46BQ	LVR-IC	LDO, 4.6V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B6	fm	BL8555-46BRA	LVR-IC	LDO, 4.6V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B6	fm	BL8555-46BRB	LVR-IC	LDO, 4.6V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B6	fm	LR8555-46BQ	LVR-IC	LDO, 4.6V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B6	fm	LR8555-46BRA	LVR-IC	LDO, 4.6V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B6	fm	LR8555-46BRB	LVR-IC	LDO, 4.6V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B6	fp	BL8555-26BQ	LVR-IC	LDO, 2.6V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B6	fp	BL8555-26BRA	LVR-IC	LDO, 2.6V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B6	fp	BL8555-26BRB	LVR-IC	LDO, 2.6V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B6	fp	LR8555-26BQ	LVR-IC	LDO, 2.6V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B6	fp	LR8555-26BRA	LVR-IC	LDO, 2.6V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B6	fp	LR8555-26BRB	LVR-IC	LDO, 2.6V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B60	-	R1152N060B	LVR-IC	Boost, 6V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B60	ej	XC6115B231MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B61	-	R1152N061B	LVR-IC	Boost, 6.1V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B61	ej	XC6115B232MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B62	-	R1152N062B	LVR-IC	Boost, 6.2V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B62	-	S-80841CLMC-B62-T2	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B62	ej	XC6115B233MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B63	-	R1152N063B	LVR-IC	Boost, 6.3V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B63	-	S-80842CLMC-B63-T2	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B63	-	TC53C1602ECT	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
B63	ej	XC6115B234MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B64	-	R1152N064B	LVR-IC	Boost, 6.4V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B64	-	S-80843CLMC-B64-T2	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B64	ej	XC6115B235MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B65	-	R1152N065B	LVR-IC	Boost, 6.5V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B65	-	S-80844CLMC-B65-T2	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B65	ej	XC6115B236MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B66	-	R1152N066B	LVR-IC	Boost, 6.6V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B66	-	S-80845CLMC-B66-T2	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B66	ej	XC6115B237MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B67	-	R1152N067B	LVR-IC	Boost, 6.7V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B67	-	S-80846CLMC-B67-T2	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B67	ej	XC6115B238MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B68	-	R1152N068B	LVR-IC	Boost, 6.8V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B68	-	S-80847CLMC-B68-T2	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B68	ej	XC6115B239MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B69	-	R1152N069B	LVR-IC	Boost, 6.9V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B69	-	S-80848CLMC-B69-T2	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B69	ej	XC6115B240MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6A	-	S-80815CLMC-B6A-T2	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6A	-	XC6108C16AMR	Vdet-IC	1.6V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B6A	ej	XC6115B241MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6B	-	S-80816CLMC-B6B-T2	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6B	-	XC6108C16BMR	Vdet-IC	1.6V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B6B	ej	XC6115B242MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6C	-	S-80817CLMC-B6C-T2	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6C	-	XC6108C16CMR	Vdet-IC	1.6V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B6C	ej	XC6115B243MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6D	-	S-80818CLMC-B6D-T2	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6D	-	XC6108C16DMR	Vdet-IC	1.6V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B6D	ej	XC6115B244MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6E	-	S-80819CLMC-B6E-T2	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6E	ej	XC6115B245MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6F	-	S-80820CLMC-B6F-T2	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6F	ec	XC6115B216MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6F	ej	XC6115B246MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6G	-	S-80821CLMC-B6G-T2	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6H	-	S-80822CLMC-B6H-T2	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6H	ec	XC6115B217MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B6H	ej	XC6115B247MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6I	-	S-80823CLMC-B6I-T2	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6J	-	S-80824CLMC-B6J-T2	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6K	-	S-80825CLMC-B6K-T2	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6K	ec	XC6115B218MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6K	ej	XC6115B248MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6L	-	S-80826CLMC-B6L-T2	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6L	ec	XC6115B219MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6L	ej	XC6115B249MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6M	-	S-80827CLMC-B6M-T2	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6M	ec	XC6115B220MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6M	ej	XC6115B250MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6N	-	S-80828CLMC-B6N-T2	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6N	ec	XC6115B221MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6O	-	S-80829CLMC-B6O-T2	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6P	-	S-80830CLMC-B6P-T2	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6P	ec	XC6115B222MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6Q	-	S-80831CLMC-B6Q-T2	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6R	-	S-80832CLMC-B6R-T2	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6R	ec	XC6115B223MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6S	-	S-80833CLMC-B6S-T2	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6S	ec	XC6115B224MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6T	-	S-80834CLMC-B6T-T2	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6T	ec	XC6115B225MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6U	-	S-80835CLMC-B6U-T2	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6U	ec	XC6115B226MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6V	-	S-80836CLMC-B8U-T2	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6V	ec	XC6115B227MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6W	-	S-80837CLMC-B6W-T2	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6X	-	S-80838CLMC-B6X-T2	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6X	ec	XC6115B228MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6Y	-	S-80839CLMC-B6Y-T2	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6Y	ec	XC6115B229MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B6Z	-	S-80840CLMC-B6Z-T2	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B6Z	ec	XC6115B230MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
b7	-	BD45E361G-M	Vdet-IC	3.6V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
B7	-	AP432Q	Vref-IC	Adjustable, Precision, Shunt, 1.24V±1%	SOT-23-5	28re	RF1	6k	Ana
B7	-	BL8555-17BQ	LVR-IC	LDO, 1.7V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B7	-	BL8555-17BRA	LVR-IC	LDO, 1.7V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B7	-	BL8555-17BRB	LVR-IC	LDO, 1.7V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B7	-	LR8555-17BQ	LVR-IC	LDO, 1.7V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B7	-	LR8555-17BRA	LVR-IC	LDO, 1.7V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B7	-	LR8555-17BRB	LVR-IC	LDO, 1.7V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B7	-	R1111N371A	LVR-IC	LDO, Low noise, 3.7V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
B7	-	TC1015-5.0VRX	LVR-IC	LDO, 5.0V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
B7	ea	BL8555-17LQ	LVR-IC	LDO, 1.7V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B7	ea	BL8555-17LRA	LVR-IC	LDO, 1.7V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B7	ea	BL8555-17LRB	LVR-IC	LDO, 1.7V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B7	ea	LR8555-17LQ	LVR-IC	LDO, 1.7V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B7	ea	LR8555-17LRA	LVR-IC	LDO, 1.7V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B7	ea	LR8555-17LRB	LVR-IC	LDO, 1.7V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B7	ea	RN5VD17AA	Vdet-IC	1.7V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
B7	eu	BL8555-27LQ	LVR-IC	LDO, 2.7V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B7	eu	BL8555-27LRA	LVR-IC	LDO, 2.7V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B7	eu	BL8555-27LRB	LVR-IC	LDO, 2.7V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B7	eu	LR8555-27LQ	LVR-IC	LDO, 2.7V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B7	eu	LR8555-27LRA	LVR-IC	LDO, 2.7V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B7	eu	LR8555-27LRB	LVR-IC	LDO, 2.7V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B7	fg	BL8555-37LQ	LVR-IC	LDO, 3.7V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B7	fg	BL8555-37LRA	LVR-IC	LDO, 3.7V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B7	fg	BL8555-37LRB	LVR-IC	LDO, 3.7V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B7	fg	LR8555-37LQ	LVR-IC	LDO, 3.7V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B7	fg	LR8555-37LRA	LVR-IC	LDO, 3.7V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B7	fg	LR8555-37LRB	LVR-IC	LDO, 3.7V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B7	fh	BL8555-47LQ	LVR-IC	LDO, 4.7V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B7	fh	BL8555-47LRA	LVR-IC	LDO, 4.7V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B7	fh	BL8555-47LRB	LVR-IC	LDO, 4.7V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B7	fh	LR8555-47LQ	LVR-IC	LDO, 4.7V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B7	fh	LR8555-47LRA	LVR-IC	LDO, 4.7V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B7	fh	LR8555-47LRB	LVR-IC	LDO, 4.7V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B7	fk	BL8555-37BQ	LVR-IC	LDO, 3.7V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B7	fk	BL8555-37BRA	LVR-IC	LDO, 3.7V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B7	fk	BL8555-37BRB	LVR-IC	LDO, 3.7V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B7	fk	LR8555-37BQ	LVR-IC	LDO, 3.7V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B7	fk	LR8555-37BRA	LVR-IC	LDO, 3.7V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B7	fk	LR8555-37BRB	LVR-IC	LDO, 3.7V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B7	fm	BL8555-47BPQ	LVR-IC	LDO, 4.7V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B7	fm	BL8555-47BRA	LVR-IC	LDO, 4.7V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B7	fm	BL8555-47BRB	LVR-IC	LDO, 4.7V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B7	fm	LR8555-47BPQ	LVR-IC	LDO, 4.7V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B7	fm	LR8555-47BRA	LVR-IC	LDO, 4.7V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B7	fm	LR8555-47BRB	LVR-IC	LDO, 4.7V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B7	fp	BL8555-27BQ	LVR-IC	LDO, 2.7V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B7	fp	BL8555-27BRA	LVR-IC	LDO, 2.7V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B7	fp	BL8555-27BRB	LVR-IC	LDO, 2.7V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B7	fp	LR8555-27BQ	LVR-IC	LDO, 2.7V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B7	fp	LR8555-27BRA	LVR-IC	LDO, 2.7V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B7	fp	LR8555-27BRB	LVR-IC	LDO, 2.7V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B7=	-	RT9193-25GJ5	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6g	Rct
B70	-	R1152N070B	LVR-IC	Boost, 7V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B70	ej	XC6115B331MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B71	-	R1152N071B	LVR-IC	Boost, 7.1V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B71	ej	XC6115B332MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B72	-	R1152N072B	LVR-IC	Boost, 7.2V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B72	ej	XC6115B333MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B73	-	R1152N073B	LVR-IC	Boost, 7.3V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B73	-	TC53C1702ECT	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
B73	ej	XC6115B334MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B74	-	R1152N074B	LVR-IC	Boost, 7.4V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B74	ej	XC6115B335MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B75	-	R1152N075B	LVR-IC	Boost, 7.5V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B75	ej	XC6115B336MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B76	-	R1152N076B	LVR-IC	Boost, 7.6V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B76	ej	XC6115B337MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B77	-	R1152N077B	LVR-IC	Boost, 7.7V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B77	ej	XC6115B338MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B78	-	R1152N078B	LVR-IC	Boost, 7.8V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B78	ej	XC6115B339MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B79	-	R1152N079B	LVR-IC	Boost, 7.9V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B79	ej	XC6115B340MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7A	-	S-80849CLMC-B7A-T2	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B7A	-	XC6108C17AMR	Vdet-IC	1.7V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B7A	ej	XC6115B341MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7B	-	S-80850CLMC-B7B-T2	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B7B	-	XC6108C17BMR	Vdet-IC	1.7V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B7B	ej	XC6115B342MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7C	-	S-80851CLMC-B7C-T2	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B7C	-	XC6108C17CMR	Vdet-IC	1.7V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B7C	ej	XC6115B343MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7D	-	S-80852CLMC-B7D-T2	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B7D	-	XC6108C17DMR	Vdet-IC	1.7V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B7D	ej	XC6115B344MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7E	-	S-80853CLMC-B7E-T2	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B7E	ej	XC6115B345MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7F	-	S-80854CLMC-B7F-T2	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B7F	ec	XC6115B316MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7F	ej	XC6115B346MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7G	-	S-80855CLMC-B7G-T2	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B7H	-	S-80856CLMC-B7H-T2	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B7H	ec	XC6115B317MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7H	ej	XC6115B347MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7I	-	S-80857CLMC-B7I-T2	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B7J	-	S-80858CLMC-B7J-T2	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B7K	-	S-80859CLMC-B7K-T2	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B7K	ec	XC6115B318MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7K	ej	XC6115B348MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7L	-	S-80860CLMC-B7L-T2	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
B7L	ec	XC6115B319MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7L	ej	XC6115B349MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7M	ec	XC6115B320MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B7M	ej	XC6115B350MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7N	ec	XC6115B321MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7P	ec	XC6115B322MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7R	ec	XC6115B323MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7S	ec	XC6115B324MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7T	ec	XC6115B325MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7U	ec	XC6115B326MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7V	ec	XC6115B327MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7X	ec	XC6115B328MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7Y	ec	XC6115B329MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B7Z	ec	XC6115B330MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
b8	-	BD45E371G-M	Vdet-IC	3.7V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
B8	-	AP432AQ	Vref-IC	Adjustable, Precision, Shunt, 1.24V±0.5%	SOT-23-5	28re	RF1	6k	Ana
B8	-	BL8555-18BQ	LVR-IC	LDO, 1.8V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B8	-	BL8555-18BRA	LVR-IC	LDO, 1.8V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B8	-	BL8555-18BRB	LVR-IC	LDO, 1.8V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B8	-	LR8555-18BQ	LVR-IC	LDO, 1.8V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B8	-	LR8555-18BRA	LVR-IC	LDO, 1.8V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B8	-	LR8555-18BRB	LVR-IC	LDO, 1.8V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B8	-	PI74STX1G08CX	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6a	Per
B8	-	PI74STX1G08TX	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6a	Per
B8	-	R1111N381A	LVR-IC	LDO, Low noise, 3.8V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
B8	-	TC1015-2.85VRX	LVR-IC	LDO, 2.85V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
B8	ea	BL8555-18LQ	LVR-IC	LDO, 1.8V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B8	ea	BL8555-18LRA	LVR-IC	LDO, 1.8V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B8	ea	BL8555-18LRB	LVR-IC	LDO, 1.8V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B8	ea	LR8555-18LQ	LVR-IC	LDO, 1.8V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B8	ea	LR8555-18LRA	LVR-IC	LDO, 1.8V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B8	ea	LR8555-18LRB	LVR-IC	LDO, 1.8V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B8	ea	RN5VD18AA	Vdet-IC	1.8V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
B8	eu	BL8555-28LQ	LVR-IC	LDO, 2.8V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B8	eu	BL8555-28LRA	LVR-IC	LDO, 2.8V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B8	eu	BL8555-28LRB	LVR-IC	LDO, 2.8V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B8	eu	LR8555-28LQ	LVR-IC	LDO, 2.8V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B8	eu	LR8555-28LRA	LVR-IC	LDO, 2.8V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B8	eu	LR8555-28LRB	LVR-IC	LDO, 2.8V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B8	fg	BL8555-38LQ	LVR-IC	LDO, 3.8V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B8	fg	BL8555-38LRA	LVR-IC	LDO, 3.8V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B8	fg	BL8555-38LRB	LVR-IC	LDO, 3.8V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B8	fg	LR8555-38LQ	LVR-IC	LDO, 3.8V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B8	fg	LR8555-38LRA	LVR-IC	LDO, 3.8V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B8	fg	LR8555-38LRB	LVR-IC	LDO, 3.8V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B8	fh	BL8555-48LQ	LVR-IC	LDO, 4.8V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B8	fh	BL8555-48LRA	LVR-IC	LDO, 4.8V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B8	fh	BL8555-48LRB	LVR-IC	LDO, 4.8V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B8	fh	LR8555-48LQ	LVR-IC	LDO, 4.8V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B8	fh	LR8555-48LRA	LVR-IC	LDO, 4.8V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B8	fh	LR8555-48LRB	LVR-IC	LDO, 4.8V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B8	fk	BL8555-38BQ	LVR-IC	LDO, 3.8V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B8	fk	BL8555-38BRA	LVR-IC	LDO, 3.8V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B8	fk	BL8555-38BRB	LVR-IC	LDO, 3.8V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B8	fk	LR8555-38BQ	LVR-IC	LDO, 3.8V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B8	fk	LR8555-38BRA	LVR-IC	LDO, 3.8V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B8	fk	LR8555-38BRB	LVR-IC	LDO, 3.8V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B8	fm	BL8555-48BQ	LVR-IC	LDO, 4.8V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B8	fm	BL8555-48BRA	LVR-IC	LDO, 4.8V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B8	fm	BL8555-48BRB	LVR-IC	LDO, 4.8V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B8	fm	LR8555-48BQ	LVR-IC	LDO, 4.8V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B8	fm	LR8555-48BRA	LVR-IC	LDO, 4.8V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B8	fm	LR8555-48BRB	LVR-IC	LDO, 4.8V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B8	fp	BL8555-28BQ	LVR-IC	LDO, 2.8V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B8	fp	BL8555-28BRA	LVR-IC	LDO, 2.8V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B8	fp	BL8555-28BRB	LVR-IC	LDO, 2.8V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B8	fp	LR8555-28BQ	LVR-IC	LDO, 2.8V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B8	fp	LR8555-28BRA	LVR-IC	LDO, 2.8V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B8	fp	LR8555-28BRB	LVR-IC	LDO, 2.8V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B8-	-	RT9198-32PU5R	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6a	Rct
B8=	-	RT9198-25GJ5R	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Rct
B80	-	R1152N080B	LVR-IC	Boost, 8V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B80	ej	XC6115B431MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B81	-	R1152N081B	LVR-IC	Boost, 8.1V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B81	ej	XC6115B432MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B82	-	R1152N082B	LVR-IC	Boost, 8.2V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B82	-	S-80841CNMC-B82-T2	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B82	ej	XC6115B433MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B83	-	R1152N083B	LVR-IC	Boost, 8.3V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B83	-	S-80842CNMC-B83-T2	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B83	-	TC53C1802ECT	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
B83	ej	XC6115B434MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B84	-	R1152N084B	LVR-IC	Boost, 8.4V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B84	-	S-80843CNMC-B84-T2	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B84	ej	XC6115B435MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B85	-	R1152N085B	LVR-IC	Boost, 8.5V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B85	-	S-80844CNMC-B85-T2	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B85	ej	XC6115B436MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B86	-	R1152N086B	LVR-IC	Boost, 8.6V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B86	-	S-80845CNMC-B86-T2	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B86	ej	XC6115B437MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B87	-	R1152N087B	LVR-IC	Boost, 8.7V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B87	-	S-80846CNMC-B87-T2	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B87	ej	XC6115B438MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B88	-	R1152N088B	LVR-IC	Boost, 8.8V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B88	-	S-80847CNMC-B88-T2	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B88	ej	XC6115B439MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B89	-	R1152N089B	LVR-IC	Boost, 8.9V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B89	-	S-80848CNMC-B89-T2	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B89	ej	XC6115B440MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8A	-	S-80815CNMC-B8A-T2	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8A	-	XC6108C18AMR	Vdet-IC	1.8V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B8A	ej	XC6115B441MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8B	-	S-80816CNMC-B8B-T2	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8B	-	XC6108C18BMR	Vdet-IC	1.8V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B8B	ej	XC6115B442MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8C	-	S-80817CNMC-B8C-T2	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8C	-	XC6108C18CMR	Vdet-IC	1.8V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B8C	ej	XC6115B443MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8D	-	S-80818CNMC-B8D-T2	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8D	-	XC6108C18DMR	Vdet-IC	1.8V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B8D	ej	XC6115B444MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8E	-	S-80819CNMC-B8E-T2	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8E	ej	XC6115B445MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8F	-	S-80820CNMC-B8F-T2	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8F	ec	XC6115B416MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8F	ej	XC6115B446MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8G	-	S-80821CNMC-B8G-T2	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8H	-	S-80822CNMC-B8H-T2	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8H	ec	XC6115B417MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8H	ej	XC6115B447MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8I	-	S-80823CNMC-B8I-T2	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8J	-	S-80824CNMC-B8J-T2	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8K	-	S-80825CNMC-B8K-T2	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8K	ec	XC6115B418MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8K	ej	XC6115B448MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8L	-	S-80826CNMC-B8L-T2	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8L	ec	XC6115B419MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8L	ej	XC6115B449MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8M	-	S-80827CNMC-B8M-T2	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8M	ec	XC6115B420MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8M	ej	XC6115B450MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8N	-	S-80828CNMC-B8N-T2	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8N	ec	XC6115B421MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8O	-	S-80829CNMC-B8O-T2	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8P	-	S-80830CNMC-B8P-T2	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8P	ec	XC6115B422MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8Q	-	S-80831CNMC-B8Q-T2	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8R	-	S-80832CNMC-B8R-T2	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8R	ec	XC6115B423MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8S	-	S-80833CNMC-B8S-T2	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8S	ec	XC6115B424MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8T	-	S-80834CNMC-B8T-T2	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B8T	ec	XC6115B425MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8U	-	S-80835CNMC-B8U-T2	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8U	ec	XC6115B426MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8V	-	S-80836CNMC-B8V-T2	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8V	ec	XC6115B427MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8W	-	S-80837CNMC-B8W-T2	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8X	-	S-80838CNMC-B8X-T2	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8X	ec	XC6115B428MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8Y	-	S-80839CNMC-B8Y-T2	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8Y	ec	XC6115B429MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B8Z	-	S-80840CNMC-B8Z-T2	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B8Z	ec	XC6115B430MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
b9	-	BD45E381G-M	Vdet-IC	3.8V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
B9	-	BL8555-19BQ	LVR-IC	LDO, 1.9V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B9	-	BL8555-19BRA	LVR-IC	LDO, 1.9V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B9	-	BL8555-19BRB	LVR-IC	LDO, 1.9V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B9	-	LR8555-19BQ	LVR-IC	LDO, 1.9V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B9	-	LR8555-19BRA	LVR-IC	LDO, 1.9V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B9	-	LR8555-19BRB	LVR-IC	LDO, 1.9V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B9	-	R1111N391A	LVR-IC	LDO, Low noise, 3.9V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
B9	-	TC1015-3.6VRX	LVR-IC	LDO, 3.6V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
B9	ea	BL8555-19LQ	LVR-IC	LDO, 1.9V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B9	ea	BL8555-19LRA	LVR-IC	LDO, 1.9V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B9	ea	BL8555-19LRB	LVR-IC	LDO, 1.9V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B9	ea	LR8555-19LQ	LVR-IC	LDO, 1.9V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B9	ea	LR8555-19LRA	LVR-IC	LDO, 1.9V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B9	ea	LR8555-19LRB	LVR-IC	LDO, 1.9V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B9	ea	RN5VD19AA	Vdet-IC	1.9V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
B9	eu	BL8555-29LQ	LVR-IC	LDO, 2.9V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B9	eu	BL8555-29LRA	LVR-IC	LDO, 2.9V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B9	eu	BL8555-29LRB	LVR-IC	LDO, 2.9V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B9	eu	LR8555-29LQ	LVR-IC	LDO, 2.9V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B9	eu	LR8555-29LRA	LVR-IC	LDO, 2.9V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B9	eu	LR8555-29LRB	LVR-IC	LDO, 2.9V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B9	fg	BL8555-39LQ	LVR-IC	LDO, 3.9V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B9	fg	BL8555-39LRA	LVR-IC	LDO, 3.9V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B9	fg	BL8555-39LRB	LVR-IC	LDO, 3.9V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B9	fg	LR8555-39LQ	LVR-IC	LDO, 3.9V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B9	fg	LR8555-39LRA	LVR-IC	LDO, 3.9V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B9	fg	LR8555-39LRB	LVR-IC	LDO, 3.9V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B9	fh	BL8555-49LQ	LVR-IC	LDO, 4.9V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Shb
B9	fh	BL8555-49LRA	LVR-IC	LDO, 4.9V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Shb
B9	fh	BL8555-49LRB	LVR-IC	LDO, 4.9V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Shb
B9	fh	LR8555-49LQ	LVR-IC	LDO, 4.9V±2%, 100mA	SC-70-5	28ym	VR1	6kd	Lrc
B9	fh	LR8555-49LRA	LVR-IC	LDO, 4.9V±2%, 100mA	SOT-23-5	28ym	VR1	6kd	Lrc
B9	fh	LR8555-49LRB	LVR-IC	LDO, 4.9V±2%, 100mA	SOT-23-5	28c5	VR1	6kc	Lrc
B9	fk	BL8555-39BQ	LVR-IC	LDO, 3.9V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B9	fk	BL8555-39BRA	LVR-IC	LDO, 3.9V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B9	fk	BL8555-39BRB	LVR-IC	LDO, 3.9V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B9	fk	LR8555-39BQ	LVR-IC	LDO, 3.9V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B9	fk	LR8555-39BRA	LVR-IC	LDO, 3.9V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B9	fk	LR8555-39BRB	LVR-IC	LDO, 3.9V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B9	fm	BL8555-49BQ	LVR-IC	LDO, 4.9V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B9	fm	BL8555-49BRA	LVR-IC	LDO, 4.9V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B9	fm	BL8555-49BRB	LVR-IC	LDO, 4.9V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B9	fm	LR8555-49BQ	LVR-IC	LDO, 4.9V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B9	fm	LR8555-49BRA	LVR-IC	LDO, 4.9V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B9	fm	LR8555-49BRB	LVR-IC	LDO, 4.9V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B9	fp	BL8555-29BQ	LVR-IC	LDO, 2.9V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
B9	fp	BL8555-29BRA	LVR-IC	LDO, 2.9V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
B9	fp	BL8555-29BRB	LVR-IC	LDO, 2.9V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
B9	fp	LR8555-29BQ	LVR-IC	LDO, 2.9V±2%, 100mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
B9	fp	LR8555-29BRA	LVR-IC	LDO, 2.9V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
B9	fp	LR8555-29BRB	LVR-IC	LDO, 2.9V±2%, 100mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
B9-	-	RT9198-28PU5R	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6a	Rct
B90	-	R1152N090B	LVR-IC	Boost, 9V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B90	ej	XC6115B531MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B91	-	R1152N091B	LVR-IC	Boost, 9.1V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B91	ej	XC6115B532MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B92	-	R1152N092B	LVR-IC	Boost, 9.2V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B92	ej	XC6115B533MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B93	-	R1152N093B	LVR-IC	Boost, 9.3V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B93	-	TC53C1902ECT	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
B93	ej	XC6115B534MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B94	-	R1152N094B	LVR-IC	Boost, 9.4V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B94	ej	XC6115B535MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B95	-	R1152N095B	LVR-IC	Boost, 9.5V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B95	ej	XC6115B536MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B96	-	R1152N096B	LVR-IC	Boost, 9.6V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B96	ej	XC6115B537MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B97	-	R1152N097B	LVR-IC	Boost, 9.7V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B97	ej	XC6115B538MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B98	-	R1152N098B	LVR-IC	Boost, 9.8V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B98	ej	XC6115B539MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B99	-	R1152N099B	LVR-IC	Boost, 9.9V±2%, 150mA, +CE	SOT-23-5	28vrf	VR6	6g	Ric
B99	ej	XC6115B540MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9A	-	S-80849CNMC-B9A-T2	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B9A	-	XC6108C19AMR	Vdet-IC	1.9V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B9A	ej	XC6115B541MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9B	-	S-80850CNMC-B9B-T2	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B9B	-	XC6108C19BMR	Vdet-IC	1.9V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
B9B	ej	XC6115B542MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9C	-	S-80851CNMC-B9C-T2	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B9C	-	XC6108C19CMR	Vdet-IC	1.9V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B9C	ej	XC6115B543MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9D	-	S-80852CNMC-B9D-T2	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B9D	-	XC6108C19DMR	Vdet-IC	1.9V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
B9D	ej	XC6115B544MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9E	-	S-80853CNMC-B9E-T2	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B9E	ej	XC6115B545MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9F	-	S-80854CNMC-B9F-T2	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B9F	ec	XC6115B516MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9F	ej	XC6115B546MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9G	-	S-80855CNMC-B9G-T2	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B9H	-	S-80856CNMC-B9H-T2	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B9H	ec	XC6115B517MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9H	ej	XC6115B547MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9I	-	S-80857CNMC-B9I-T2	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B9J	-	S-80858CNMC-B9J-T2	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B9K	-	S-80859CNMC-B9K-T2	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B9K	ec	XC6115B518MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9K	ej	XC6115B548MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9L	-	S-80860CNMC-B9L-T2	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
B9L	ec	XC6115B519MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9L	ej	XC6115B549MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9M	ec	XC6115B520MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9M	ej	XC6115B550MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9N	ec	XC6115B521MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9P	ec	XC6115B522MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9R	ec	XC6115B523MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9S	ec	XC6115B524MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9T	ec	XC6115B525MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9U	ec	XC6115B526MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9V	ec	XC6115B527MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9X	ec	XC6115B528MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9Y	ec	XC6115B529MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
B9Z	ec	XC6115B530MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
Ba	-	BD48E37G	Vdet-IC	3.7V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
BA	-	µPA500T	Si-npn	Dual, 60V, 100mA, 300mW, 250MHz	SOT-23-5	28	T11	6a	Nec
BA	-	µPA570T	Si-npn	Dual, 60V, 100mA, 250MHz	SOT-23-5	28	T11	6a	Nec
BA	-	BD4719G	Vdet-IC	1.9V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BA	-	BU15TA2WHFV	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
BA	-	PI74STX1G125CX	CMOS-Log	Bus buffer gate with 3-state output	SC-70-5	28	Log14	6a	Per
BA	-	PI74STX1G125TX	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log14	6a	Per
BA	-	PT7M7812ZTA	Vdet-IC	2.32V±1.5%, +Reset PPO, -MR	SOT-23-5	28vd2	VD5	6k	Pti
BA	-	RN5RT30AA	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
BA	-	V6300ASP5B	Vdet-IC	2.0V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6g	Em
BA	ea	PT7M7812ZTAE	Vdet-IC	2.32V±1.5%, +Reset PPO, -MR, Lead free	SOT-23-5	28vd2	VD5	6k	Pti
BA-	-	RT9193-29PU5	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
BA0	ej	XC6115B631MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BA1	ej	XC6115B632MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BA2	ej	XC6115B633MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BA3	ej	XC6115B634MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BA4	ej	XC6115B635MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BA5	ej	XC6115B636MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BA6	ej	XC6115B637MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BA7	ej	XC6115B638MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BA8	-	XC9237F08CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BA8	ej	XC6115B639MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BA9	-	XC9237F09CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BA9	ej	XC6115B640MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAA	-	RP107N341B	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
BAA	-	S-816A25AMC-BAA-T2	LVR-IC	2.5V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6a	Sii
BAA	ej	XC6115B641MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAB	-	RP107N351B	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
BAB	-	S-816A26AMC-BAB-T2	LVR-IC	2.6V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAB	ej	XC6115B642MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAC	-	AME8510AEEVAFE46	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR, Strobe	SOT-23-5	28cp	VD17	6k	Ame
BAC	-	RP107N361B	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
BAC	-	S-816A27AMC-BAC-T2	LVR-IC	2.7V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAC	ej	XC6115B643MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAD	-	AME8520AEEVEFE46	Vdet-IC	4.63V±1.5%, ±Reset PPO, Strobe	SOT-23-5	28xq	VD19	6k	Ame
BAD	-	RP107N371B	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
BAD	-	S-816A28AMC-BAD-T2	LVR-IC	2.8V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAD	eh	AME8520AEEVEFE46Z	Vdet-IC	4.63V±1.5%, ±Reset PPO, Strobe, lead free	SOT-23-5	28xq	VD19	6k	Ame
BAD	ej	XC6115B644MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAE	-	AME8530AEEVEFX46	Vdet-IC	4.63V±1.5%, ±Reset PPO -MR	SOT-23-5	28xf	VD21	6k	Ame
BAE	-	RP107N381B	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
BAE	-	S-816A29AMC-BAE-T2	LVR-IC	2.9V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAE	eh	AME8530AEEVEFX46Z	Vdet-IC	4.63V±1.5%, ±Reset PPO -MR, lead free	SOT-23-5	28xf	VD21	6k	Ame
BAE	ej	XC6115B645MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAF	-	RP107N391B	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
BAF	-	S-816A30AMC-BAF-T2	LVR-IC	3.0V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAF	ec	XC6115B616MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAF	ej	XC6115B646MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAG	-	RP107N401B	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
BAG	-	S-816A31AMC-BAG-T2	LVR-IC	3.1V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAH	-	RP107N411B	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
BAH	-	S-816A32AMC-BAH-T2	LVR-IC	3.2V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAH	ec	XC6115B617MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAH	ej	XC6115B647MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAI	-	S-816A33AMC-BAI-T2	LVR-IC	3.3V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAJ	-	RP107N421B	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
BAJ	-	S-816A34AMC-BAJ-T2	LVR-IC	3.4V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAK	-	RP107N121B5	LVR-IC	LDO, 1.25V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
BAK	-	S-816A35AMC-BAK-T2	LVR-IC	3.5V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAK	ec	XC6115B618MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAK	ej	XC6115B648MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAL	-	RP107N181B5	LVR-IC	LDO, 1.85V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
BAL	-	S-816A36AMC-BAL-T2	LVR-IC	3.6V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAL	-	XC9237F0LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BAL	ec	XC6115B619MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAL	ej	XC6115B649MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAM	-	RP107N281B5	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
BAM	-	S-816A37AMC-BAM-T2	LVR-IC	3.7V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAM	-	XC9237F0MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BAM	ec	XC6115B620MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAM	ej	XC6115B650MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAN	-	S-816A38AMC-BAN-T2	LVR-IC	3.8V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAN	ec	XC6115B621MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAO	-	S-816A39AMC-BAO-T2	LVR-IC	3.9V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAP	-	S-816A40AMC-BAP-T2	LVR-IC	4.0V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAP	ec	XC6115B622MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAQ	-	S-816A41AMC-BAQ-T2	LVR-IC	4.1V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAR	-	S-816A42AMC-BAR-T2	LVR-IC	4.2V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAR	ec	XC6115B623MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAS	-	S-816A43AMC-BAS-T2	LVR-IC	4.3V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAS	ec	XC6115B624MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAT	-	S-816A44AMC-BAT-T2	LVR-IC	4.4V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAT	ec	XC6115B625MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BAU	-	S-816A45AMC-BAU-T2	LVR-IC	4.5V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAU	ec	XC6115B626MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAV	-	S-816A46AMC-BAV-T2	LVR-IC	4.6V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAV	ec	XC6115B627MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAW	-	S-816A47AMC-BAW-T2	LVR-IC	4.7V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAX	-	S-816A48AMC-BAX-T2	LVR-IC	4.8V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAX	ec	XC6115B628MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAY	-	S-816A49AMC-BAY-T2	LVR-IC	4.9V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAY	ec	XC6115B629MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
BAZ	-	S-816A50AMC-BAZ-T2	LVR-IC	5.0V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BAZ	ec	XC6115B630MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	SOT-25	28xg	VD20	6g	Tor
Bb	-	BD48E38G	Vdet-IC	3.8V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
BB	-	AAT3221IGV-1.8	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
BB	-	BD4720G	Vdet-IC	2.0V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BB	-	BU18TA2WHFV	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
BB	-	PI74STX1G126CX	CMOS-Log	Bus buffer gate with 3-state output	SC-70-5	28	Log13	6a	Per
BB	-	PI74STX1G126TX	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log13	6a	Per
BB	-	PT7M7812YTA	Vdet-IC	2.20V±1.5%, +Reset PPO, -MR	SOT-23-5	28vd2	VD5	6k	Pti
BB	-	RN5RT31AA	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
BB	-	V6300BSP5B	Vdet-IC	2.4V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6g	Em
BB	ea	PT7M7812YTAE	Vdet-IC	2.20V±1.5%, +Reset PPO, -MR, Lead free	SOT-23-5	28vd2	VD5	6k	Pti
BB-	-	RT9013-12PU5	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6g	Rct
BB0	-	XC9237F10CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BB0	ej	XC6115C231MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BB1	-	XC9237F11CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BB1	ej	XC6115C232MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BB2	-	XC9237F12CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BB2	ej	XC6115C233MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BB3	-	XC9237F13CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BB3	ej	XC6115C234MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BB4	-	XC9237F14CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BB4	ej	XC6115C235MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BB5	-	XC9237F15CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BB5	ej	XC6115C236MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BB6	-	XC9237F16CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BB6	ej	XC6115C237MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BB7	-	XC9237F17CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BB7	ej	XC6115C238MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BB8	-	XC9237F18CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BB8	ej	XC6115C239MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BB9	-	XC9237F19CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BB9	ej	XC6115C240MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBA	-	RP107N341D	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
BBA	-	S-816A51AMC-BBA-T2	LVR-IC	5.1V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BBA	-	XC9237F1ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BBA	ej	XC6115C241MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBB	-	RP107N351D	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
BBB	-	S-816A52AMC-BBB-T2	LVR-IC	5.2V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BBB	-	XC9237F1BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BBB	ej	XC6115C242MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBC	-	RP107N361D	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
BBC	-	S-816A53AMC-BBC-T2	LVR-IC	5.3V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BBC	-	XC9237F1CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BBC	ej	XC6115C243MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBD	-	RP107N371D	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
BBD	-	S-816A54AMC-BBD-T2	LVR-IC	5.4V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BBD	-	XC9237F1DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BBD	ej	XC6115C244MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBE	-	RP107N381D	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
BBE	-	S-816A55AMC-BBE-T2	LVR-IC	5.5V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BBE	-	XC9237F1ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BBE	ej	XC6115C245MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBF	-	RP107N391D	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
BBF	-	S-816A56AMC-BBF-T2	LVR-IC	5.6V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BBF	-	XC9237F1FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BBF	ec	XC6115C216MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBF	ej	XC6115C246MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBG	-	RP107N401D	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
BBG	-	S-816A57AMC-BBG-T2	LVR-IC	5.7V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BBH	-	RP107N411D	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BBH	-	S-816A58AMC-BBH-T2	LVR-IC	5.8V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BBH	-	XC9237F1HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BBH	ec	XC6115C217MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBH	ej	XC6115C247MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBI	-	S-816A59AMC-BBI-T2	LVR-IC	5.9V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BBJ	-	RP107N421D	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
BBJ	-	S-816A60AMC-BBJ-T2	LVR-IC	6.0V±2%, -CE, Ext. transistor	SOT-23-5	28vr9	VR6	6g	Sii
BBK	-	RP107N121D5	LVR-IC	LDO, 1.25V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
BBK	-	XC9237F1KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BBK	ec	XC6115C218MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBK	ej	XC6115C248MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBL	-	RP107N181D5	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
BBL	-	XC9237F1LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BBL	ec	XC6115C219MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBL	ej	XC6115C249MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBM	-	RP107N281D5	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
BBM	-	XC9237F1MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BBM	ec	XC6115C220MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBM	ej	XC6115C250MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBN	ec	XC6115C221MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBP	ec	XC6115C222MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBR	ec	XC6115C223MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBS	ec	XC6115C224MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBT	ec	XC6115C225MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBU	ec	XC6115C226MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBV	ec	XC6115C227MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBX	ec	XC6115C228MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBY	ec	XC6115C229MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BBZ	ec	XC6115C230MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
Bc	-	BD48E39G	Vdet-IC	3.9V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
BC	-	BD4721G	Vdet-IC	2.1V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BC	-	BU25TA2WHFV	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
BC	-	PI74STX1G14CX	CMOS-Log	Inverting Schmitt-trigger	SC-70-5	28	Log7	6a	Per
BC	-	PI74STX1G14TX	CMOS-Log	Inverting Schmitt-trigger	SOT-23-5	28	Log7	6a	Per
BC	-	RN5RT32AA	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
BC	-	V6300CSP5B	Vdet-IC	2.8V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6g	Em
BC-	-	RT9013-1HPU5	LVR-IC	LDO, 1.85V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6g	Rct
BC0	-	XC9237F20CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BC0	ej	XC6115C331MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BC1	-	XC9237F21CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BC1	ej	XC6115C332MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BC2	-	XC9237F22CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BC2	ej	XC6115C333MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BC3	-	XC9237F23CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BC3	ej	XC6115C334MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BC4	-	XC9237F24CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BC4	ej	XC6115C335MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BC5	-	XC9237F25CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BC5	ej	XC6115C336MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BC6	-	XC9237F26CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BC6	ej	XC6115C337MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BC7	-	XC9237F27CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BC7	ej	XC6115C338MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BC8	-	XC9237F28CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BC8	ej	XC6115C339MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BC9	-	XC9237F29CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BC9	ej	XC6115C340MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCA	-	XC9237F2ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BCA	ej	XC6115C341MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCB	-	XC9237F2BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BCB	ej	XC6115C342MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCC	-	XC9237F2CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BCC	ej	XC6115C343MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCD	-	XC9237F2DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BCD	ej	XC6115C344MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCE	-	XC9237F2ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BCE	ej	XC6115C345MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCF	-	XC9237F2FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BCF	ec	XC6115C316MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCF	ej	XC6115C346MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BCH	-	XC9237F2HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BCH	ec	XC6115C317MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCH	ej	XC6115C347MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCK	-	S-814A20AMC-BCKT2	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BCK	-	XC9237F2KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BCK	ec	XC6115C318MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCK	ej	XC6115C348MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCL	-	S-814A21AMC-BCLT2	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BCL	-	XC9237F2LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BCL	ec	XC6115C319MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCL	ej	XC6115C349MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCM	-	S-814A22AMC-BCMT2	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BCM	-	XC9237F2MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BCM	ec	XC6115C320MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCM	ej	XC6115C350MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCN	-	AME8550BEEVC210Y	Vdet-IC	2.1V±2%, -Reset PPO	TSOT-25	28vdo	VD3	6g	Ame
BCN	-	AME8550BEEVC210Z	Vdet-IC	2.1V±2%, -Reset PPO	SOT-25	28vdo	VD3	6g	Ame
BCN	-	S-814A23AMC-BCNT2	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BCN	ec	XC6115C321MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCN	eh	AME8550BEEVC210L	Vdet-IC	2.1V±2%, -Reset PPO	SOT-25	28vdo	VD3	6g	Ame
BCO	-	S-814A24AMC-BCOT2	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BCP	-	S-814A25AMC-BCPT2	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BCP	ec	XC6115C322MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCQ	-	S-814A26AMC-BCQT2	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BCR	-	S-814A27AMC-BCRT2	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BCR	ec	XC6115C323MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCS	-	S-814A28AMC-BCST2	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BCS	ec	XC6115C324MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCT	-	S-814A29AMC-BCTT2	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BCT	ec	XC6115C325MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCU	-	S-814A30AMC-BCUT2	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BCU	ec	XC6115C326MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCV	-	S-814A31AMC-BCVT2	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BCV	ec	XC6115C327MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCW	-	AME8510AEEVBFE23	Vdet-IC	2.32V±1.5%, -Reset ODO, -MR, Strobe	SOT-23-5	28cp	VD16	6k	Ame
BCW	-	S-814A32AMC-BCWT2	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BCX	-	AME8510AEEVBFE46	Vdet-IC	4.63V±1.5%, -Reset ODO, -MR, Strobe	SOT-23-5	28cp	VD16	6k	Ame
BCX	-	S-814A33AMC-BCXT2	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BCX	ec	XC6115C328MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCY	-	S-814A34AMC-BCYT2	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BCY	ec	XC6115C329MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BCZ	-	S-814A35AMC-BCZT2	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BCZ	ec	XC6115C330MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
Bd	-	BD48E40G	Vdet-IC	4.0V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
BD	-	BD4722G	Vdet-IC	2.2V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BD	-	BU26TA2WHFV	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
BD	-	PI74STX1G32CX	CMOS-Log	2-input OR gate	SC-70-5	28	Log4	6a	Per
BD	-	PI74STX1G32TX	CMOS-Log	2-input OR gate	SOT-23-5	28	Log4	6a	Per
BD	-	RN5RT33AA	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
BD	-	V6300DSP5B	Vdet-IC	3.5V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6g	Em
BD-	-	RT9013-2HPU5	LVR-IC	LDO, 2.85V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6g	Rct
BD0	-	XC9237F30CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BD0	ej	XC6115C431MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BD1	-	XC9237F31CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BD1	ej	XC6115C432MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BD2	-	XC9237F32CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BD2	ej	XC6115C433MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BD3	-	XC9237F33CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BD3	ej	XC6115C434MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BD4	-	XC9237F34CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BD4	ej	XC6115C435MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BD5	-	XC9237F35CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BD5	ej	XC6115C436MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BD6	-	XC9237F36CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BD6	ej	XC6115C437MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BD7	-	XC9237F37CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BD7	ej	XC6115C438MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BD8	-	XC9237F38CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BD8	ej	XC6115C439MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BD9	-	XC9237F39CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BD9	ej	XC6115C440MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDA	-	AME8520AEEVEED46	Vdet-IC	4.63V±1.5%, ±Reset PPO, Strobe	SOT-23-5	28xq	VD19	6k	Ame
BDA	-	S-814A36AMC-BDAT2	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDA	-	XC9237F3ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BDA	eh	AME8520AEEVEED46Z	Vdet-IC	4.63V±1.5%, ±Reset PPO, Strobe, lead free	SOT-23-5	28xq	VD19	6k	Ame
BDA	ej	XC6115C441MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDB	-	S-814A37AMC-BDBT2	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDB	-	XC9237F3BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BDB	ej	XC6115C442MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDC	-	S-814A38AMC-BDCT2	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDC	-	XC9237F3CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BDC	ej	XC6115C443MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDCA	-	ISL28005FH25Z	Lin-IC	Current sense amp, 2.7..28V, 25V/V	SOT-23-5	28a0	OP1	6k	Isl
BDD	-	S-814A39AMC-BDDT2	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDD	-	XC9237F3DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BDD	ej	XC6115C444MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDDA	-	ISL28005FH50Z	Lin-IC	Current sense amp, 2.7..28V, 50V/V	SOT-23-5	28a0	OP1	6k	Isl
BDE	-	S-814A40AMC-BDET2	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDE	-	XC9237F3ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BDE	ej	XC6115C445MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDEA	-	ISL28005FH100Z	Lin-IC	Current sense amp, 2.7..28V, 100V/V	SOT-23-5	28a0	OP1	6k	Isl
BDF	-	S-814A41AMC-BDFT2	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDF	-	XC9237F3FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BDF	ec	XC6115C416MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDF	ej	XC6115C446MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDG	-	AME8550AEIVD280Z	Vdet-IC	2.8V±2%, -Reset PPO	SC-70-5	28z9	VD2	6g	Ame
BDG	-	S-814A42AMC-BDGT2	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDG	eh	AME8550AEIVD280L	Vdet-IC	2.8V±2%, -Reset PPO	SC-70-5	28z9	VD2	6g	Ame
BDH	-	AME8550BEEVC240Y	Vdet-IC	2.4V±2%, -Reset PPO	TSOT-25	28vdo	VD3	6g	Ame
BDH	-	AME8550BEEVC240Z	Vdet-IC	2.4V±2%, -Reset PPO	SOT-25	28vdo	VD3	6g	Ame
BDH	-	S-814A43AMC-BDHT2	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDH	-	XC9237F3HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BDH	ec	XC6115C417MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDH	eh	AME8550BEEVC240L	Vdet-IC	2.4V±2%, -Reset PPO	SOT-25	28vdo	VD3	6g	Ame
BDH	ej	XC6115C447MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDI	-	S-814A44AMC-BDIT2	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDJ	-	S-814A45AMC-BDJT2	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDK	-	S-814A46AMC-BDKT2	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDK	-	XC9237F3KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BDK	ec	XC6115C418MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDK	ej	XC6115C448MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDL	-	S-814A47AMC-BDLT2	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDL	-	XC9237F3LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BDL	ec	XC6115C419MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDL	ej	XC6115C449MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDM	-	S-814A48AMC-BDMT2	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDM	-	XC9237F3MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BDM	ec	XC6115C420MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDM	ej	XC6115C450MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDN	-	S-814A49AMC-BDNT2	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDN	ec	XC6115C421MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDO	-	S-814A50AMC-BDOT2	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDP	-	S-814A51AMC-BDPT2	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDP	ec	XC6115C422MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDQ	-	S-814A52AMC-BDQT2	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDR	-	S-814A53AMC-BDRT2	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDR	ec	XC6115C423MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDS	-	S-814A54AMC-BDST2	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDS	ec	XC6115C424MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDT	-	S-814A55AMC-BDTT2	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDT	ec	XC6115C425MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDU	-	S-814A56AMC-BDUT2	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDU	ec	XC6115C426MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDV	-	S-814A57AMC-BDVT2	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDV	ec	XC6115C427MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDW	-	S-814A58AMC-BDWT2	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDX	-	S-814A59AMC-BDXT2	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDX	ec	XC6115C428MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BDY	-	S-814A60AMC-BDYT2	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BDY	ec	XC6115C429MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BDZ	ec	XC6115C430MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
Be	-	BD48E41G	Vdet-IC	4.1V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
BE	-	BD4723G	Vdet-IC	2.3V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BE	-	BU27TA2WHFV	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
BE	-	PI74STX1G79CX	CMOS-Log	Positive edge-triggered D-type flip-flop	SC-70-5	28	Log20	6a	Per
BE	-	PI74STX1G79TX	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT-23-5	28	Log20	6a	Per
BE	-	RN5RT34AA	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
BE	-	SN74AHTC1G08DCK	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6g	Ti
BE	-	SN74AHTC1G08DRL	CMOS-Log	2-input AND gate	SOT-553	30	Log3	6g	Ti
BE	-	V6300ESP5B	Vdet-IC	4V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6g	Em
BE0	-	XC9237F40CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BE0	ej	XC6115C531MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BE1	ej	XC6115C532MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BE2	ej	XC6115C533MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BE3	ej	XC6115C534MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BE4	ej	XC6115C535MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BE5	ej	XC6115C536MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BE6	ej	XC6115C537MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BE7	ej	XC6115C538MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BE8	ej	XC6115C539MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BE9	ej	XC6115C540MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEA	-	AME8550CEEVB300Y	Vdet-IC	3.0V±2%, -Reset ODO	TSOT-25	28vdm	VD6	6g	Ame
BEA	-	AME8550CEEVB300Z	Vdet-IC	3.0V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
BEA	eh	AME8550CEEVB300L	Vdet-IC	3.0V±2%, -Reset ODO	SOT-25	28vdm	VD6	6g	Ame
BEA	ej	XC6115C541MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEB	ej	XC6115C542MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEC	ej	XC6115C543MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BED	-	AME8500BEEVBE31	Vdet-IC	3.08V±1.5%, -Reset ODO, 150ms	SOT-23-5	28vdm	VD6	6k	Ame
BED	eh	AME8500BEEVBE31Z	Vdet-IC	3.08V±1.5%, -Reset ODO, 150ms, lead free	SOT-23-5	28vdm	VD6	6k	Ame
BED	ej	XC6115C544MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEE	ej	XC6115C545MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEF	ec	XC6115C516MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEF	ej	XC6115C546MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEH	ec	XC6115C517MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEH	ej	XC6115C547MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEK	ec	XC6115C518MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEK	ej	XC6115C548MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEL	ec	XC6115C519MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEL	ej	XC6115C549MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEM	ec	XC6115C520MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEM	ej	XC6115C550MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEN	ec	XC6115C521MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEP	ec	XC6115C522MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BER	ec	XC6115C523MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BES	ec	XC6115C524MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BET	ec	XC6115C525MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEU	ec	XC6115C526MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEV	ec	XC6115C527MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEX	ec	XC6115C528MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEY	ec	XC6115C529MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BEZ	ec	XC6115C530MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
Bf	-	BD48E42G	Vdet-IC	4.2V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
BF	-	BD4724G	Vdet-IC	2.4V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BF	-	BU28TA2WHFV	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
BF	-	RN5RT35AA	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
BF	-	V6300FSP5B	Vdet-IC	4.5V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6g	Em
BF0	ej	XC6115C631MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BF1	ej	XC6115C632MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BF2	ej	XC6115C633MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BF3	ej	XC6115C634MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BF4	ej	XC6115C635MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BF5	ej	XC6115C636MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BF6	ej	XC6115C637MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BF7	ej	XC6115C638MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BF8	-	XC9237F08DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BF8	ej	XC6115C639MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BF9	-	XC9237F09DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BF9	ej	XC6115C640MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFA	ej	XC6115C641MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFB	ej	XC6115C642MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BFC	ej	XC6115C643MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFD	ej	XC6115C644MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFE	ej	XC6115C645MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFF	ec	XC6115C616MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFF	ej	XC6115C646MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFH	ec	XC6115C617MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFH	ej	XC6115C647MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFK	ec	XC6115C618MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFK	ej	XC6115C648MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFL	-	XC9237F0LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BFL	ec	XC6115C619MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFL	ej	XC6115C649MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFM	-	XC9237F0MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BFM	ec	XC6115C620MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFM	ej	XC6115C650MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFN	ec	XC6115C621MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFN	eh	AME8861AEEV180Y	LVR-IC	LDO, 1.8V±1.5%, 600mA, +CE	TSOT-25	28vrx	VR7	6k	Ame
BFN	eh	AME8861AEEV180Z	LVR-IC	LDO, 1.8V±1.5%, 600mA, +CE	SOT-25	28vrx	VR7	6k	Ame
BFP	ec	XC6115C622MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFR	ec	XC6115C623MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFS	ec	XC6115C624MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFT	ec	XC6115C625MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFU	ec	XC6115C626MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFV	ec	XC6115C627MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFW	-	RP170N291D	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
BFX	-	RP170N301D	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
BFX	ec	XC6115C628MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFY	ec	XC6115C629MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
BFZ	ec	XC6115C630MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	SOT-25	28xg	VD20	6g	Tor
Bg	-	BD48E43G	Vdet-IC	4.3V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
BG	-	AP432IQ	Vref-IC	Adjustable, Precision, Shunt, 1.24V±1%	SOT-23-5	28re	RF1	6k	Ana
BG	-	BD4725G	Vdet-IC	2.5V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BG	-	BU2JTA2WHFV	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
BG	-	PI74STX1G86CX	CMOS-Log	2-input EXCLUSIVE-OR gate	SC-70-5	28	Log5	6a	Per
BG	-	PI74STX1G86TX	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-23-5	28	Log5	6a	Per
BG	-	RN5RT36AA	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
BG	-	V6300GSP5B	Vdet-IC	2.0V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6g	Em
BG-	-	RT9193-32PU5	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
BGA	-	S-818A20AMC-BGAT2	LVR-IC	LDO, 2.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGB	-	S-818A21AMC-BGBT2	LVR-IC	LDO, 2.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGC	-	S-818A22AMC-BGCT2	LVR-IC	LDO, 2.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGD	-	S-818A23AMC-BGDT2	LVR-IC	LDO, 2.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGE	-	S-818A24AMC-BGET2	LVR-IC	LDO, 2.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGF	-	S-818A25AMC-BGFT2	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGG	-	S-818A26AMC-BGGT2	LVR-IC	LDO, 2.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGH	-	S-818A27AMC-BGHT2	LVR-IC	LDO, 2.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGI	-	S-818A28AMC-BGIT2	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGJ	-	S-818A29AMC-BGJT2	LVR-IC	LDO, 2.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGK	-	S-818A30AMC-BGKT2	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGL	-	S-818A31AMC-BGLT2	LVR-IC	LDO, 3.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGM	-	S-818A32AMC-BGMT2	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGN	-	S-818A33AMC-BGNT2	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGO	-	S-818A34AMC-BGOT2	LVR-IC	LDO, 3.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGP	-	S-818A35AMC-BGPT2	LVR-IC	LDO, 3.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGQ	-	S-818A36AMC-BGQT2	LVR-IC	LDO, 3.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGR	-	S-818A37AMC-BGRT2	LVR-IC	LDO, 3.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGS	-	S-818A38AMC-BGST2	LVR-IC	LDO, 3.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGT	-	S-818A39AMC-BGTT2	LVR-IC	LDO, 3.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGU	-	S-818A40AMC-BGUT2	LVR-IC	LDO, 4.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGV	-	S-818A41AMC-BGVT2	LVR-IC	LDO, 4.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGW	-	S-818A42AMC-BGWT2	LVR-IC	LDO, 4.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGX	-	S-818A43AMC-BGXT2	LVR-IC	LDO, 4.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGY	-	S-818A44AMC-BGYT2	LVR-IC	LDO, 4.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BGZ	-	S-818A45AMC-BGZT2	LVR-IC	LDO, 4.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
Bh	-	BD48E44G	Vdet-IC	4.4V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
BH	-	AP432IAQ	Vref-IC	Adjustable, Precision, Shunt, 1.24V±0.5%	SOT-23-5	28re	RF1	6k	Ana
BH	-	BD4726G	Vdet-IC	2.6V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BH	-	BU29TA2WHFV	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
BH	-	PI74STX1GU04C	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	Per
BH	-	PI74STX1GU04T	CMOS-Log	Inverter	SOT-23-5	28	Log6	6a	Per



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BH	-	RN5RT37AA	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
BH	-	V6300HSP5B	Vdet-IC	2.4V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6g	Em
BH	ea	PI74STX1GU04CE	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	Per
BH	ea	PI74STX1GU04TE	CMOS-Log	Inverter	SOT-23-5	28	Log6	6a	Per
BH0	-	XC9237F10DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BH0	ej	XC6115D331MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BH1	-	XC9237F11DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BH1	ej	XC6115D332MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BH2	-	XC9237F12DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BH2	ej	XC6115D333MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BH3	-	XC9237F13DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BH3	ej	XC6115D334MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BH4	-	XC9237F14DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BH4	ej	XC6115D335MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BH5	-	XC9237F15DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BH5	ej	XC6115D336MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BH6	-	XC9237F16DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BH6	ej	XC6115D337MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BH7	-	XC9237F17DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BH7	ej	XC6115D338MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BH8	-	XC9237F18DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BH8	ej	XC6115D339MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BH9	-	XC9237F19DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BH9	ej	XC6115D340MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHA	-	S-818A46AMC-BHAT2	LVR-IC	LDO, 4.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BHA	-	XC9237F1ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BHA	ej	XC6115D341MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHB	-	S-818A47AMC-BHBT2	LVR-IC	LDO, 4.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BHB	-	XC9237F1BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BHB	ej	XC6115D342MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHC	-	S-818A48AMC-BHCT2	LVR-IC	LDO, 4.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BHC	-	XC9237F1CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BHC	ej	XC6115D343MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHD	-	S-818A49AMC-BHDT2	LVR-IC	LDO, 4.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BHD	-	XC9237F1DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BHD	ej	XC6115D344MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHE	-	S-818A50AMC-BHET2	LVR-IC	LDO, 5.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BHE	-	XC9237F1EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BHE	ej	XC6115D345MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHF	-	S-818A51AMC-BHFT2	LVR-IC	LDO, 5.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BHF	-	XC9237F1FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BHF	ec	XC6115D316MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHF	ej	XC6115D346MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHG	-	S-818A52AMC-BHGT2	LVR-IC	LDO, 5.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BHH	-	S-818A53AMC-BHHT2	LVR-IC	LDO, 5.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BHH	-	XC9237F1HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BHH	ec	XC6115D317MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHH	ej	XC6115D347MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHI	-	S-818A54AMC-BHIT2	LVR-IC	LDO, 5.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BHJ	-	S-818A55AMC-BHJT2	LVR-IC	LDO, 5.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BHK	-	S-818A56AMC-BHKT2	LVR-IC	LDO, 5.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BHK	-	XC9237F1KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BHK	ec	XC6115D318MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHK	ej	XC6115D348MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHL	-	S-818A57AMC-BHLT2	LVR-IC	LDO, 5.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BHL	-	XC9237F1LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BHL	ec	XC6115D319MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHL	ej	XC6115D349MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHM	-	S-818A58AMC-BHMT2	LVR-IC	LDO, 5.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BHM	-	XC9237F1MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BHM	ec	XC6115D320MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHM	ej	XC6115D350MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHN	-	S-818A59AMC-BHNT2	LVR-IC	LDO, 5.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BHN	ec	XC6115D321MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHO	-	S-818A60AMC-BHOT2	LVR-IC	LDO, 6.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
BHP	ec	XC6115D322MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHR	ec	XC6115D323MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHS	ec	XC6115D324MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHT	ec	XC6115D325MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHU	ec	XC6115D326MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BHV	ec	XC6115D327MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHX	ec	XC6115D328MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHY	ec	XC6115D329MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BHZ	ec	XC6115D330MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BI	-	AAT3222IGV-2.8	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
BI	-	PI74STX1GU04AC	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	Per
BI	-	PI74STX1GU04AT	CMOS-Log	Inverter	SOT-23-5	28	Log6	6a	Per
BI	-	V6300ISP5B	Vdet-IC	2.8V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6g	Em
BI	ea	PI74STX1GU04ACE	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	Per
BI	ea	PI74STX1GU04ATE	CMOS-Log	Inverter	SOT-23-5	28	Log6	6a	Per
BJ	-	BD4728G	Vdet-IC	2.8V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BJ	-	BU30TA2WHFV	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
BJ	-	PT7M7823LTA	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR, WD	SOT-23-5	28cp	VD17	6k	Pti
BJ	-	RN5RT38AA	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
BJ	-	V6300JSP5B	Vdet-IC	3.5V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6g	Em
BJ	ea	PT7M7823LTAE	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR, WD, Lead free	SOT-23-5	28cp	VD17	6k	Pti
BJ-	-	RT9198-35PU5	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	SC-70-5	28xm	VR4	6a	Rct
Bk	-	BD48E45G	Vdet-IC	4.5V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
BK	-	BD4729G	Vdet-IC	2.9V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BK	-	BU31TA2WHFV	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
BK	-	PT7M7823MTA	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR, WD	SOT-23-5	28cp	VD17	6k	Pti
BK	-	RN5RT39AA	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
BK	-	V6300KSP5B	Vdet-IC	4V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6g	Em
BK	ea	PT7M7823MTAE	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR, WD, Lead free	SOT-23-5	28cp	VD17	6k	Pti
BK-	-	RT9013-27PU5	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6g	Rct
BK=	-	RT9193-28GJ5	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6g	Rct
BK0	-	XC9237F20DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BK0	ej	XC6115D431MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BK1	-	XC9237F21DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BK1	ej	XC6115D432MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BK2	-	XC9237F22DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BK2	ej	XC6115D433MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BK3	-	XC9237F23DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BK3	ej	XC6115D434MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BK4	-	XC9237F24DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BK4	ej	XC6115D435MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BK5	-	XC9237F25DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BK5	ej	XC6115D436MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BK6	-	XC9237F26DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BK6	ej	XC6115D437MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BK7	-	XC9237F27DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BK7	ej	XC6115D438MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BK8	-	XC9237F28DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BK8	ej	XC6115D439MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BK9	-	XC9237F29DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BK9	ej	XC6115D440MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKA	-	XC9237F2ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BKA	ej	XC6115D441MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKB	-	XC9237F2BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BKB	ej	XC6115D442MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKC	-	XC9237F2CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BKC	ej	XC6115D443MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKD	-	XC9237F2DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BKD	ej	XC6115D444MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKE	-	XC9237F2EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BKE	ej	XC6115D445MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKF	-	XC9237F2FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BKF	ec	XC6115D416MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKF	ej	XC6115D446MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKH	-	XC9237F2HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BKH	ec	XC6115D417MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKH	ej	XC6115D447MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKK	-	XC9237F2KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BKK	ec	XC6115D418MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKK	ej	XC6115D448MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKL	-	XC9237F2LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BKL	ec	XC6115D419MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKL	ej	XC6115D449MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKM	-	XC9237F2MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BKM	ec	XC6115D420MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BKM	ej	XC6115D450MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKN	ec	XC6115D421MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKO	-	AME8550BEEVD280Y	Vdet-IC	2.8V±2%, -Reset ODO	TSOT-25	28vdo	VD1	6g	Ame
BKO	-	AME8550BEEVD280Z	Vdet-IC	2.8V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
BKO	eh	AME8550BEEVD280L	Vdet-IC	2.8V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
BKP	ec	XC6115D422MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKR	ec	XC6115D423MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKS	ec	XC6115D424MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKT	ec	XC6115D425MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKU	-	AME8550CEEVA270Z	Vdet-IC	2.7V±2%, -Reset PPO	SOT-25	28vdm	VD7	6g	Ame
BKU	ec	XC6115D426MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKU	eh	AME8550CEEVA270L	Vdet-IC	2.7V±2%, -Reset PPO	SOT-25	28vdm	VD7	6g	Ame
BKV	ec	XC6115D427MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKX	ec	XC6115D428MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKY	ec	XC6115D429MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BKZ	ec	XC6115D430MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BL	-	AAT3221IGV-2.0	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
BL	-	BD4730G	Vdet-IC	3.0V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BL	-	BU32TA2WHFV	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
BL	-	PT7M7823TTA	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR, WD	SOT-23-5	28cp	VD17	6k	Pti
BL	-	R1112N301A	LVR-IC	LDO, Low noise, 3.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
BL	-	V6300LSP5B	Vdet-IC	4.5V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6g	Em
BL	ea	PT7M7823TTAE	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR, WD, Lead free	SOT-23-5	28cp	VD17	6k	Pti
BL0	-	XC9237F30DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BL0	ej	XC6115D531MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BL1	-	XC9237F31DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BL1	ej	XC6115D532MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BL2	-	XC9237F32DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BL2	ej	XC6115D533MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BL3	-	XC9237F33DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BL3	ej	XC6115D534MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BL4	-	XC9237F34DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BL4	ej	XC6115D535MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BL5	-	XC9237F35DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BL5	ej	XC6115D536MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BL6	-	XC9237F36DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BL6	ej	XC6115D537MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BL7	-	XC9237F37DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BL7	ej	XC6115D538MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BL8	-	XC9237F38DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BL8	ej	XC6115D539MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BL9	-	XC9237F39DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BL9	ej	XC6115D540MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLA	-	XC9237F3ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BLA	ej	XC6115D541MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLB	-	XC9237F3BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BLB	ej	XC6115D542MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLC	-	XC9237F3CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BLC	ej	XC6115D543MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLD	-	XC9237F3DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BLD	ej	XC6115D544MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLE	-	XC9237F3EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BLE	ej	XC6115D545MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLF	-	XC9237F3FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BLF	ec	XC6115D516MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLF	ej	XC6115D546MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLH	-	XC9237F3HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BLH	ec	XC6115D517MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLH	ej	XC6115D547MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLK	-	XC9237F3KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BLK	ec	XC6115D518MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLK	ej	XC6115D548MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLL	-	XC9237F3LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BLL	ec	XC6115D519MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLL	ej	XC6115D549MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLM	-	XC9237F3MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BLM	ec	XC6115D520MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLM	ej	XC6115D550MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLN	ec	XC6115D521MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLP	ec	XC6115D522MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BLR	-	AME8550BEEVC270Z	Vdet-IC	2.7V±2%, -Reset PPO	SOT-25	28vdo	VD3	6g	Ame
BLR	ec	XC6115D523MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLR	eh	AME8550BEEVC270L	Vdet-IC	2.7V±2%, -Reset PPO	SOT-25	28vdo	VD3	6g	Ame
BLS	ec	XC6115D524MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLT	ec	XC6115D525MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLU	ec	XC6115D526MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLV	ec	XC6115D527MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLX	ec	XC6115D528MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLY	ec	XC6115D529MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BLZ	ec	XC6115D530MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
bM	-	74CBTLV1G125GW	CMOS-Log	Bus buffer gate with 3-state output	SOT-353-1	28	Log14	6a	Nxp
Bm	-	BD48E46G	Vdet-IC	4.6V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
BM	-	BD4731G	Vdet-IC	3.1V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BM	-	BU33TA2WHFV	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
BM	-	PT7M7823STA	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR, WD	SOT-23-5	28cp	VD17	6k	Pti
BM	-	R1112N311A	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
BM	-	V6300MSP5B	Vdet-IC	2.0V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6g	Em
BM	ea	PT7M7823STAE	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR, WD, Lead free	SOT-23-5	28cp	VD17	6k	Pti
BM0	-	XC9237F40DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28s4	DC16	6g	Tor
BM0	ej	XC6115D631MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BM1	ej	XC6115D632MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BM2	ej	XC6115D633MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BM3	ej	XC6115D634MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BM4	ej	XC6115D635MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BM5	ej	XC6115D636MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BM6	ej	XC6115D637MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BM7	ej	XC6115D638MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BM8	ej	XC6115D639MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BM9	ej	XC6115D640MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMA	ej	XC6115D641MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMB	ej	XC6115D642MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMC	ej	XC6115D643MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMD	ej	XC6115D644MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BME	ej	XC6115D645MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMF	ec	XC6115D616MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMF	ej	XC6115D646MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMH	ec	XC6115D617MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMH	ej	XC6115D647MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMK	ec	XC6115D618MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMK	ej	XC6115D648MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BML	ec	XC6115D619MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BML	ej	XC6115D649MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMM	ec	XC6115D620MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMM	ej	XC6115D650MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMN	ec	XC6115D621MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMP	ec	XC6115D622MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMR	ec	XC6115D623MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMS	ec	XC6115D624MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMT	ec	XC6115D625MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMU	ec	XC6115D626MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMV	ec	XC6115D627MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMX	ec	XC6115D628MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMY	ec	XC6115D629MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
BMZ	ec	XC6115D630MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	SOT-25	28xg	VD20	6g	Tor
Bn	-	BD48E47G	Vdet-IC	4.7V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
BN	-	BD4732G	Vdet-IC	3.2V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BN	-	BU34TA2WHFV	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
BN	-	PT7M7823RTA	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR, WD	SOT-23-5	28cp	VD17	6k	Pti
BN	-	R1112N321A	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
BN	-	V6300NSP5B	Vdet-IC	2.4V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6g	Em
BN	ea	PT7M7823RTAE	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR, WD, Lead free	SOT-23-5	28cp	VD17	6k	Pti
BO	-	PT7M7823ZTA	Vdet-IC	2.32V±1.5%, -Reset PPO, -MR, WD	SOT-23-5	28cp	VD17	6k	Pti
BO	-	V6300OSP5B	Vdet-IC	2.8V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6g	Em
BO	ea	PT7M7823ZTAE	Vdet-IC	2.32V±1.5%, -Reset PPO, -MR, WD, Lead free	SOT-23-5	28cp	VD17	6k	Pti
Bp	-	BD48E48G	Vdet-IC	4.8V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
BP	-	BD4734G	Vdet-IC	3.4V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BP	-	PT7M7823YTA	Vdet-IC	2.20V±1.5%, -Reset PPO, -MR, WD	SOT-23-5	28cp	VD17	6k	Pti
BP	-	R1112N331A	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
BP	-	V6300PSP5B	Vdet-IC	3.5V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6g	Em
BP	ea	PT7M7823YTAE	Vdet-IC	2.20V±1.5%, -Reset PPO, -MR, WD, Lead free	SOT-23-5	28cp	VD17	6k	Pti

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BP-	-	RT9193-20PU5	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	SC-70-5	28vrx	VR7	6g	Rct
BP0	ej	XC6115E431MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BP1	ej	XC6115E432MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BP2	ej	XC6115E433MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BP3	ej	XC6115E434MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BP4	ej	XC6115E435MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BP5	ej	XC6115E436MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BP6	ej	XC6115E437MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BP7	ej	XC6115E438MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BP8	ej	XC6115E439MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BP9	ej	XC6115E440MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPA	ej	XC6115E441MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPB	ej	XC6115E442MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPC	ej	XC6115E443MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPD	ej	XC6115E444MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPE	ej	XC6115E445MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPF	ec	XC6115E416MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPF	ej	XC6115E446MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPH	ec	XC6115E417MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPH	ej	XC6115E447MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPK	ec	XC6115E418MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPK	ej	XC6115E448MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPL	ec	XC6115E419MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPL	ej	XC6115E449MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPM	ec	XC6115E420MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPM	ej	XC6115E450MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPN	ec	XC6115E421MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPP	ec	XC6115E422MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPR	ec	XC6115E423MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPS	ec	XC6115E424MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPT	ec	XC6115E425MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPU	ec	XC6115E426MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPV	ec	XC6115E427MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPX	ec	XC6115E428MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPY	ec	XC6115E429MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BPZ	ec	XC6115E430MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BQ	-	BD4735G	Vdet-IC	3.5V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BQ	-	PT7M7824LTA	Vdet-IC	4.63V±1.5%, ±Reset PPO, WD	SOT-23-5	28xg	VD19	6k	Pti
BQ	-	R1112N341A	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
BQ	-	V6300QSP5B	Vdet-IC	4V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6g	Em
BQ	ea	PT7M7824LTAE	Vdet-IC	4.63V±1.5%, ±Reset PPO, WD, Lead free	SOT-23-5	28xg	VD19	6k	Pti
Br	-	BD48E49G	Vdet-IC	4.9V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
BR	-	AT1201-33XR	LVR-IC	LDO, LN, +CE, 3.3V±2%, 150mA	SOT-23-5	28un	VR7	6a	Atr
BR	-	BD4736G	Vdet-IC	3.6V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BR	-	PT7M7824MTA	Vdet-IC	4.38V±1.5%, ±Reset PPO, WD	SOT-23-5	28xg	VD19	6k	Pti
BR	-	R1112N351A	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
BR	-	V6300RSP5B	Vdet-IC	4.5V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6g	Em
BR	ea	PT7M7824MTAE	Vdet-IC	4.38V±1.5%, ±Reset PPO, WD, Lead free	SOT-23-5	28xg	VD19	6k	Pti
BR-	-	RT9198-15PU5R	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6a	Rct
BR0	ej	XC6115E531MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BR1	ej	XC6115E532MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BR2	ej	XC6115E533MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BR3	ej	XC6115E534MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BR4	ej	XC6115E535MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BR5	ej	XC6115E536MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BR6	ej	XC6115E537MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BR7	ej	XC6115E538MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BR8	ej	XC6115E539MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BR9	ej	XC6115E540MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRA	ej	XC6115E541MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRB	ej	XC6115E542MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRC	ej	XC6115E543MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRD	ej	XC6115E544MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRE	ej	XC6115E545MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRF	ec	XC6115E516MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRF	ej	XC6115E546MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRH	ec	XC6115E517MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRH	ej	XC6115E547MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRK	ec	XC6115E518MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRK	ej	XC6115E548MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BRL	ec	XC6115E519MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRL	ej	XC6115E549MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRM	ec	XC6115E520MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRM	ej	XC6115E550MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRN	ec	XC6115E521MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRP	ec	XC6115E522MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRR	ec	XC6115E523MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRS	ec	XC6115E524MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRT	ec	XC6115E525MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRU	ec	XC6115E526MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRV	-	AME8550AEIVD300Z	Vdet-IC	3.0V±2%, -Reset PPO	SC-70-5	28z9	VD2	6g	Ame
BRV	ec	XC6115E527MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRV	eh	AME8550AEIVD300L	Vdet-IC	3.0V±2%, -Reset PPO	SC-70-5	28z9	VD2	6g	Ame
BRW	-	AME8550AEIVD340Z	Vdet-IC	3.4V±2%, -Reset PPO	SC-70-5	28z9	VD2	6g	Ame
BRW	eh	AME8550AEIVD340L	Vdet-IC	3.4V±2%, -Reset PPO	SC-70-5	28z9	VD2	6g	Ame
BRX	ec	XC6115E528MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRY	ec	XC6115E529MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BRZ	ec	XC6115E530MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BS	-	BD4737G	Vdet-IC	3.7V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BS	-	PT7M7824TTA	Vdet-IC	3.08V±1.5%, ±Reset PPO, WD	SOT-23-5	28xg	VD19	6k	Pti
BS	-	R1112N361A	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
BS	ea	PT7M7824TTAE	Vdet-IC	3.08V±1.5%, ±Reset PPO, WD, Lead free	SOT-23-5	28xg	VD19	6k	Pti
BS-	-	RT9198-29PU5R	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6a	Rct
BS0	ej	XC6115E631MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BS1	ej	XC6115E632MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BS2	ej	XC6115E633MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BS3	ej	XC6115E634MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BS4	ej	XC6115E635MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BS5	ej	XC6115E636MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BS6	ej	XC6115E637MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BS7	ej	XC6115E638MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BS8	ej	XC6115E639MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BS9	ej	XC6115E640MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSA	ej	XC6115E641MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSB	ej	XC6115E642MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSC	ej	XC6115E643MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSD	ej	XC6115E644MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSE	ej	XC6115E645MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSF	ec	XC6115E616MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSF	ej	XC6115E646MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSH	ec	XC6115E617MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSH	ej	XC6115E647MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSK	ec	XC6115E618MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSK	ej	XC6115E648MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSL	ec	XC6115E619MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSL	ej	XC6115E649MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSM	ec	XC6115E620MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSM	ej	XC6115E650MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSN	ec	XC6115E621MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSP	ec	XC6115E622MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSR	ec	XC6115E623MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSS	ec	XC6115E624MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BST	ec	XC6115E625MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSU	ec	XC6115E626MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSV	ec	XC6115E627MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSX	ec	XC6115E628MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSY	ec	XC6115E629MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BSZ	ec	XC6115E630MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	SOT-25	28xg	VD20	6g	Tor
BT	-	BD4738G	Vdet-IC	3.8V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BT	-	PT7M7824STA	Vdet-IC	2.93V±1.5%, ±Reset PPO, WD	SOT-23-5	28xg	VD19	6k	Pti
BT	-	R1112N371A	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
BT	-	TC1015-2.6VRX	LVR-IC	LDO, 2.6V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
BT	ea	PT7M7824STAE	Vdet-IC	2.93V±1.5%, ±Reset PPO, WD, Lead free	SOT-23-5	28xg	VD19	6k	Pti
BT-	-	RT9198-2HPU5R	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6a	Rct
BT0	ej	XC6115F531MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BT1	ej	XC6115F532MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BT2	ej	XC6115F533MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BT3	ej	XC6115F534MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BT4	ej	XC6115F535MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BT5	ej	XC6115F536MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BT6	ej	XC6115F537MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BT7	ej	XC6115F538MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BT8	ej	XC6115F539MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BT9	ej	XC6115F540MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTA	ej	XC6115F541MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTB	ej	XC6115F542MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTC	ej	XC6115F543MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTD	ej	XC6115F544MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTE	ej	XC6115F545MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTF	ec	XC6115F516MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTF	ej	XC6115F546MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTH	ec	XC6115F517MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTH	ej	XC6115F547MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTK	ec	XC6115F518MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTK	ej	XC6115F548MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTL	ec	XC6115F519MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTL	ej	XC6115F549MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTM	ec	XC6115F520MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTM	ej	XC6115F550MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTN	ec	XC6115F521MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTP	ec	XC6115F522MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTR	-	AME8550AEIVD360Z	Vdet-IC	3.6V±2%, -Reset PPO	SC-70-5	28z9	VD2	6g	Ame
BTR	ec	XC6115F523MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTR	eh	AME8550AEIVD360L	Vdet-IC	3.6V±2%, -Reset PPO	SC-70-5	28z9	VD2	6g	Ame
BTS	ec	XC6115F524MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTT	-	AME8550BEEVD370Z	Vdet-IC	3.7V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
BTT	ec	XC6115F525MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTT	eh	AME8550BEEVD370L	Vdet-IC	3.7V±2%, -Reset ODO	SOT-25	28vdo	VD1	6g	Ame
BTU	ec	XC6115F526MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTV	ec	XC6115F527MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTX	ec	XC6115F528MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTY	ec	XC6115F529MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BTZ	ec	XC6115F530MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BU	-	BD4739G	Vdet-IC	3.9V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BU	-	PT7M7824RTA	Vdet-IC	2.63V±1.5%, ±Reset PPO, WD	SOT-23-5	28xg	VD19	6k	Pti
BU	-	R1112N381A	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
BU	ea	PT7M7824RTAE	Vdet-IC	2.63V±1.5%, ±Reset PPO, WD, Lead free	SOT-23-5	28xg	VD19	6k	Pti
BU-	-	RT9198-31PU5R	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6a	Rct
BU0	ej	XC6115F631MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BU1	ej	XC6115F632MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BU2	ej	XC6115F633MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BU3	ej	XC6115F634MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BU4	ej	XC6115F635MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BU5	ej	XC6115F636MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BU6	ej	XC6115F637MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BU7	ej	XC6115F638MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BU8	ej	XC6115F639MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BU9	ej	XC6115F640MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUA	ej	XC6115F641MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUB	ej	XC6115F642MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUC	ej	XC6115F643MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUD	ej	XC6115F644MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUE	ej	XC6115F645MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUF	ec	XC6115F616MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUF	ej	XC6115F646MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUH	ec	XC6115F617MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUH	ej	XC6115F647MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUK	ec	XC6115F618MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUK	ej	XC6115F648MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUL	ec	XC6115F619MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUL	ej	XC6115F649MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUM	ec	XC6115F620MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUM	ej	XC6115F650MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUN	ec	XC6115F621MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUP	ec	XC6115F622MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUR	ec	XC6115F623MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUS	ec	XC6115F624MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUT	ec	XC6115F625MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUU	ec	XC6115F626MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUV	ec	XC6115F627MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BUX	ec	XC6115F628MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUY	ec	XC6115F629MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BUZ	ec	XC6115F630MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	SOT-25	28xg	VD20	6g	Tor
BV	-	BD4740G	Vdet-IC	4.0V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BV	-	PT7M7824ZTA	Vdet-IC	2.32V±1.5%, ±Reset PPO, WD	SOT-23-5	28xg	VD19	6k	Pti
BV	-	R1112N391A	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
BV	ea	PT7M7824ZTAE	Vdet-IC	2.32V±1.5%, ±Reset PPO, WD, Lead free	SOT-23-5	28xg	VD19	6k	Pti
BV0	ej	XC6115H631MR	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BV1	ej	XC6115H632MR	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BV2	ej	XC6115H633MR	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BV3	ej	XC6115H634MR	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BV4	ej	XC6115H635MR	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BV5	ej	XC6115H636MR	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BV6	ej	XC6115H637MR	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BV7	ej	XC6115H638MR	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BV8	ej	XC6115H639MR	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BV9	ej	XC6115H640MR	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVA	ej	XC6115H641MR	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVB	ej	XC6115H642MR	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVC	ej	XC6115H643MR	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVD	ej	XC6115H644MR	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVE	ej	XC6115H645MR	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVF	ec	XC6115H616MR	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVF	ej	XC6115H646MR	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVH	ec	XC6115H617MR	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVH	ej	XC6115H647MR	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVK	ec	XC6115H618MR	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVK	ej	XC6115H648MR	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVL	ec	XC6115H619MR	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVL	ej	XC6115H649MR	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVM	ec	XC6115H620MR	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVM	ej	XC6115H650MR	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVN	ec	XC6115H621MR	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVP	ec	XC6115H622MR	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVR	ec	XC6115H623MR	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVS	ec	XC6115H624MR	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVT	ec	XC6115H625MR	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVU	ec	XC6115H626MR	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVV	ec	XC6115H627MR	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVX	ec	XC6115H628MR	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVY	ec	XC6115H629MR	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BVZ	ec	XC6115H630MR	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	SOT-25	28xg	VD20	6g	Tor
BW	-	BD4741G	Vdet-IC	4.1V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BW	-	PT7M7824YTA	Vdet-IC	2.20V±1.5%, ±Reset PPO, WD	SOT-23-5	28xg	VD19	6k	Pti
BW	ea	PT7M7824YTAE	Vdet-IC	2.20V±1.5%, ±Reset PPO, WD, Lead free	SOT-23-5	28xg	VD19	6k	Pti
BX	-	AT1201-33X	LVR-IC	LDO, LN, +CE, 3.3V±2%, 150mA	SOT-23-5	28vrx	VR7	6a	Atr
BX	-	BD4742G	Vdet-IC	4.2V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BX	-	PT7M7825LTA	Vdet-IC	4.63V±1.5%, ±Reset PPO, -MR	SOT-23-5	28xf	VD21	6k	Pti
BX	ea	PT7M7825LTAE	Vdet-IC	4.63V±1.5%, ±Reset PPO, -MR, Lead free	SOT-23-5	28xf	VD21	6k	Pti
BX-	-	RT9198-26PU5R	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	SC-70-5	28cx	VR4	6a	Rct
By	-	BD48E50G	Vdet-IC	5.0V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
BY	-	AAT3221IGV-2.85	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
BY	-	BD4743G	Vdet-IC	4.3V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BY	-	PT7M7825MTA	Vdet-IC	4.38V±1.5%, ±Reset PPO, -MR	SOT-23-5	28xf	VD21	6k	Pti
BY	-	TC1015-1.8VRX	LVR-IC	LDO, 1.8V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
BY	ea	PT7M7825MTAE	Vdet-IC	4.38V±1.5%, ±Reset PPO, -MR, Lead free	SOT-23-5	28xf	VD21	6k	Pti
BY-	-	RT9013A-15PU5	LVR-IC	LDO, 1.5V±2%, 120mA, +CE	SC-70-5	28cx	VR4	6g	Rct
BZ	-	BD4744G	Vdet-IC	4.4V±1%, -Reset ODO	SSOP-5	28vdq	VD6	6c	Rhm
BZ	-	PT7M7825TTA	Vdet-IC	3.08V±1.5%, ±Reset PPO, -MR	SOT-23-5	28xf	VD21	6k	Pti
BZ	-	TC1015-2.8VRX	LVR-IC	LDO, 2.8V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
BZ	ea	PT7M7825TTAE	Vdet-IC	3.08V±1.5%, ±Reset PPO, -MR, Lead free	SOT-23-5	28xf	VD21	6k	Pti
BZ-	-	RT9013A-35PU5	LVR-IC	LDO, 3.5V±2%, 120mA, +CE	SC-70-5	28cx	VR4	6g	Rct
BZW	-	OPA653IDBV	Op-IC	Wide-band, Fixed gain, JFET, ±6.5V, 2V/V, 500MHz	SOT-23-5	28opa	OP3	6a	Ti
C0	-	BH33NB1WHFV	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
C0	-	PI74STX1GT00CX	CMOS-Log	2-input NAND gate	SC-70-5	28	Log1	6a	Per
C0	-	PI74STX1GT00TX	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6a	Per
C0	-	R1111N401A	LVR-IC	LDO, Low noise, 4.0V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
C0	-	Si91842DT-22	LVR-IC	LDO, LN, 2.2V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
C0	-	TC1054-4.0VCT713	LVR-IC	LDO, 4.0V±2%, 50mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
C0	ea	RN5VD20AA	Vdet-IC	2.0V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C0	eu	BL8555-20MQ	LVR-IC	LDO, 2.0V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C0	eu	BL8555-20MRA	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C0	eu	BL8555-20MRB	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C0	eu	LR8555-20MQ	LVR-IC	LDO, 2.0V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C0	eu	LR8555-20MRA	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C0	eu	LR8555-20MRB	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C0	fg	BL8555-30MQ	LVR-IC	LDO, 3.0V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C0	fg	BL8555-30MRA	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C0	fg	BL8555-30MRB	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C0	fg	LR8555-30MQ	LVR-IC	LDO, 3.0V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C0	fg	LR8555-30MRA	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C0	fg	LR8555-30MRB	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C0	fh	BL8555-40MQ	LVR-IC	LDO, 4.0V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C0	fh	BL8555-40MRA	LVR-IC	LDO, 4.0V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C0	fh	BL8555-40MRB	LVR-IC	LDO, 4.0V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C0	fh	LR8555-40MQ	LVR-IC	LDO, 4.0V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C0	fh	LR8555-40MRA	LVR-IC	LDO, 4.0V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C0	fh	LR8555-40MRB	LVR-IC	LDO, 4.0V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C0	fi	BL8555-50MQ	LVR-IC	LDO, 5.0V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C0	fi	BL8555-50MRA	LVR-IC	LDO, 5.0V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C0	fi	BL8555-50MRB	LVR-IC	LDO, 5.0V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C0	fi	LR8555-50MQ	LVR-IC	LDO, 5.0V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C0	fi	LR8555-50MRA	LVR-IC	LDO, 5.0V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C0	fi	LR8555-50MRB	LVR-IC	LDO, 5.0V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C0	fk	BL8555-30CQ	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C0	fk	BL8555-30CRA	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C0	fk	BL8555-30CRB	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C0	fk	LR8555-30CQ	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C0	fk	LR8555-30CRA	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C0	fk	LR8555-30CRB	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C0	fm	BL8555-40CQ	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C0	fm	BL8555-40CRA	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C0	fm	BL8555-40CRB	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C0	fm	LR8555-40CQ	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C0	fm	LR8555-40CRA	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C0	fm	LR8555-40CRB	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C0	fn	BL8555-50CQ	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C0	fn	BL8555-50CRA	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C0	fn	BL8555-50CRB	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C0	fn	LR8555-50CQ	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C0	fn	LR8555-50CRA	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C0	fn	LR8555-50CRB	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C0	fp	BL8555-20CQ	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C0	fp	BL8555-20CRA	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C0	fp	BL8555-20CRB	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C0	fp	LR8555-20CQ	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C0	fp	LR8555-20CRA	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C0	fp	LR8555-20CRB	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C0-	-	RT9013B-15PU5	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Rct
C00	-	74AHCT1G00GV	CMOS-Log	2-input NAND gate	SOT753	28	Log1	6a	Nxp
C008	-	RP200Q082B	LVR-IC	LDO, 0.8V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C009	-	RP200Q092B	LVR-IC	LDO, 0.9V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C00A	-	LMC7211AIM5	Comp-IC	CMOS Rail-to-Rail input, 2.7..15V, Vofs=5mV	SOT-23	28opb	OP1	6a	Nsc
C00B	-	LMC7211BIM5	Comp-IC	CMOS Rail-to-Rail input, 2.7..15V, Vofs=15mV	SOT-23	28opb	OP1	6a	Nsc
C010	-	RP200Q102B	LVR-IC	LDO, 1.0V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C011	-	RP200Q112B	LVR-IC	LDO, 1.1V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C012	-	RP200Q122B	LVR-IC	LDO, 1.2V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C013	-	RP200Q132B	LVR-IC	LDO, 1.3V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C014	-	RP200Q142B	LVR-IC	LDO, 1.4V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C015	-	RP200Q152B	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C016	-	RP200Q162B	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C017	-	RP200Q172B	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C018	-	RP200Q182B	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C019	-	RP200Q192B	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C02	-	74AHCT1G02GV	CMOS-Log	2-input NOR gate	SOT753	28	Log2	6a	Nxp
C020	-	RP200Q202B	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C021	-	RP200Q212B	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C022	-	RP200Q222B	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C023	-	RP200Q232B	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C024	-	RP200Q242B	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C025	-	RP200Q252B	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C026	-	RP200Q262B	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C027	-	RP200Q272B	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C028	-	RP200Q282B	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C029	-	RP200Q292B	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C03	-	TC53C2002ECT	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
C030	-	RP200Q302B	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C031	-	RP200Q312B	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C032	-	RP200Q322B	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C033	-	RP200Q332B	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C034	-	RP200Q342B	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C035	-	RP200Q352B	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C036	-	RP200Q362B	LVR-IC	LDO, 3.6V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C037	-	RP200Q372B	LVR-IC	LDO, 3.7V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C038	-	RP200Q382B	LVR-IC	LDO, 3.8V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C039	-	RP200Q392B	LVR-IC	LDO, 3.9V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C04	-	74AHCT1G04GV	CMOS-Log	Inverter	SOT753	28	Log6	6a	Nxp
C040	-	RP200Q402B	LVR-IC	LDO, 4.0V±1.0%, 300mA, +CE, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
C06	-	74AHCT1G06GV	CMOS-Log	Inverter (ODO)	SOT753	28	Log19	6a	Nxp
C07	-	74AHCT1G07GV	CMOS-Log	Noninverting buffer/driver (ODO)	SOT753	28	Log8	6a	Nxp
C08	-	74AHCT1G08GV	CMOS-Log	2-input AND gate	SOT753	28	Log3	6a	Nxp
C08	-	RP110N081D	LVR-IC	LDO, 0.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C09	-	RP110N091D	LVR-IC	LDO, 0.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C0A	-	R3114N311A	Vdet-IC	3.1V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0A	-	XC6108C20AMR	Vdet-IC	2.0V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C0B	-	R3114N321A	Vdet-IC	3.2V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0B	-	XC6108C20BMR	Vdet-IC	2.0V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C0C	-	R3114N331A	Vdet-IC	3.3V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0C	-	XC6108C20CMR	Vdet-IC	2.0V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C0D	-	R3114N341A	Vdet-IC	3.4V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0D	-	XC6108C20DMR	Vdet-IC	2.0V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C0E	-	R3114N351A	Vdet-IC	3.5V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0F	-	R3114N361A	Vdet-IC	3.6V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0G	-	R3114N371A	Vdet-IC	3.7V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0H	-	R3114N381A	Vdet-IC	3.8V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0J	-	R3114N391A	Vdet-IC	3.9V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0K	-	R3114N401A	Vdet-IC	4V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0L	-	R3114N411A	Vdet-IC	4.1V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0M	-	R3114N421A	Vdet-IC	4.2V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0N	-	R3114N431A	Vdet-IC	4.3V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0P	-	R3114N441A	Vdet-IC	4.4V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0Q	-	R3114N451A	Vdet-IC	4.5V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0R	-	R3114N461A	Vdet-IC	4.6V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0S	-	R3114N471A	Vdet-IC	4.7V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0T	-	R3114N481A	Vdet-IC	4.8V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0U	-	R3114N491A	Vdet-IC	4.9V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
C0V	-	R3114N501A	Vdet-IC	5V±0.8%, -Reset ODO	SOT-23-5	28vdm	VD6	6g	Ric
c1	-	BD45E391G-M	Vdet-IC	3.9V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
C1	-	R1111N411A	LVR-IC	LDO, Low noise, 4.1V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
C1	-	TC1054-2.5VCT713	LVR-IC	LDO, 2.5V±2%, 50mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
C1	-	TC4S11F	CMOS-Log	2-input NAND gate	SSOP-5	28	Log1	6a	Tos
C1	ea	RN5VD21AA	Vdet-IC	2.1V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
C1	eu	BL8555-21MQ	LVR-IC	LDO, 2.1V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C1	eu	BL8555-21MRA	LVR-IC	LDO, 2.1V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C1	eu	BL8555-21MRB	LVR-IC	LDO, 2.1V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C1	eu	LR8555-21MQ	LVR-IC	LDO, 2.1V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C1	eu	LR8555-21MRA	LVR-IC	LDO, 2.1V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C1	eu	LR8555-21MRB	LVR-IC	LDO, 2.1V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C1	fg	BL8555-31MQ	LVR-IC	LDO, 3.1V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C1	fg	BL8555-31MRA	LVR-IC	LDO, 3.1V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C1	fg	BL8555-31MRB	LVR-IC	LDO, 3.1V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C1	fg	LR8555-31MQ	LVR-IC	LDO, 3.1V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C1	fg	LR8555-31MRA	LVR-IC	LDO, 3.1V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C1	fg	LR8555-31MRB	LVR-IC	LDO, 3.1V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C1	fh	BL8555-41MQ	LVR-IC	LDO, 4.1V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C1	fh	BL8555-41MRA	LVR-IC	LDO, 4.1V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C1	fh	BL8555-41MRB	LVR-IC	LDO, 4.1V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C1	fh	LR8555-41MQ	LVR-IC	LDO, 4.1V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C1	fh	LR8555-41MRA	LVR-IC	LDO, 4.1V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C1	fh	LR8555-41MRB	LVR-IC	LDO, 4.1V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C1	fk	BL8555-31CQ	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C1	fk	BL8555-31CRA	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C1	fk	BL8555-31CRB	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C1	fk	LR8555-31CQ	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C1	fk	LR8555-31CRA	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C1	fk	LR8555-31CRB	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C1	fm	BL8555-41CQ	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C1	fm	BL8555-41CRA	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C1	fm	BL8555-41CRB	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C1	fm	LR8555-41CQ	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C1	fm	LR8555-41CRA	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C1	fm	LR8555-41CRB	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C1	fp	BL8555-21CQ	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C1	fp	BL8555-21CRA	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C1	fp	BL8555-21CRB	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C1	fp	LR8555-21CQ	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C1	fp	LR8555-21CRA	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C1	fp	LR8555-21CRB	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C1-	-	RT9013B-18PU5	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Rct
C1-	-	RT9169-25PB	LVR-IC	LDO, 2.5V±2%, 100mA, -CE	SOT-23-5	28cx	VR4	6g	Rct
C10	-	RP110N101D	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C11	-	RP110N111D	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C12	-	R1180N121B	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C12	-	RP110N121D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C13	-	R1180N131B	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C13	-	RP110N131D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C13	-	TC53C2102ECT	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
C14	-	74AHCT1G14GV	CMOS-Log	Inverting Schmitt-trigger	SOT753	28	Log7	6a	Nxp
C14	-	R1180N141B	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C14	-	RP110N141D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C15	-	88C15-AF5	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C15	-	R1180N151B	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C15	-	RP110N151D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C15	eb	XC6367C152MR	DC-DC-IC	PWM step-up, 1.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C15	ek	XC6365C152MR	DC-DC-IC	PWM st-down, 180kHz, 1.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C15G	-	88C15G-AF5	Vdet-IC	1.5V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C15L	-	88C15L-AF5	Vdet-IC	1.5V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C16	-	88C16-AF5	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C16	-	R1180N161B	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C16	-	RP110N161D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C16	eb	XC6367C162MR	DC-DC-IC	PWM step-up, 1.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C16	ek	XC6365C162MR	DC-DC-IC	PWM st-down, 180kHz, 1.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C16G	-	88C16G-AF5	Vdet-IC	1.6V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C16L	-	88C16L-AF5	Vdet-IC	1.6V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C17	-	88C17-AF5	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C17	-	R1180N171B	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C17	-	RP110N171D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C17	-	SN74LVC1G17QDBV	CMOS-Log	Schmitt-trigger	SOT-23-5	28	Log11	6g	Ti
C17	eb	XC6367C172MR	DC-DC-IC	PWM step-up, 1.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C17	ek	XC6365C172MR	DC-DC-IC	PWM st-down, 180kHz, 1.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C17G	-	88C17G-AF5	Vdet-IC	1.7V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C17L	-	88C17L-AF5	Vdet-IC	1.7V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C18	-	88C18-AF5	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C18	-	R1180N181B	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C18	-	RP110N181D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C18	eb	XC6367C182MR	DC-DC-IC	PWM step-up, 1.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C18	ek	XC6365C182MR	DC-DC-IC	PWM st-down, 180kHz, 1.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C18G	-	88C18G-AF5	Vdet-IC	1.8V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C18L	-	88C18L-AF5	Vdet-IC	1.8V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C19	-	88C19-AF5	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C19	-	R1180N191B	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C19	-	RP110N191D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C19	eb	XC6367C192MR	DC-DC-IC	PWM step-up, 1.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C19	ek	XC6365C192MR	DC-DC-IC	PWM st-down, 180kHz, 1.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C19G	-	88C19G-AF5	Vdet-IC	1.9V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C19L	-	88C19L-AF5	Vdet-IC	1.9V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C1A	-	R3114N311C	Vdet-IC	3.1V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1A	-	XC6108C21AMR	Vdet-IC	2.1V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C1B	-	R3114N321C	Vdet-IC	3.2V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1B	-	XC6108C21BMR	Vdet-IC	2.1V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C1C	-	R3114N331C	Vdet-IC	3.3V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1C	-	XC6108C21CMR	Vdet-IC	2.1V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C1D	-	R3114N341C	Vdet-IC	3.4V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1D	-	XC6108C21DMR	Vdet-IC	2.1V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C1E	-	R3114N351C	Vdet-IC	3.5V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1F	-	R3114N361C	Vdet-IC	3.6V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1F	eb	XC6367C153MR	DC-DC-IC	PWM step-up, 1.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C1F	ek	XC6365C153MR	DC-DC-IC	PWM st-down, 300kHz, 1.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C1G	-	R3114N371C	Vdet-IC	3.7V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1H	-	R3114N381C	Vdet-IC	3.8V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1H	eb	XC6367C163MR	DC-DC-IC	PWM step-up, 1.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C1H	ek	XC6365C163MR	DC-DC-IC	PWM st-down, 300kHz, 1.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C1J	-	R3114N391C	Vdet-IC	3.9V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1K	-	R3114N401C	Vdet-IC	4V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1K	eb	XC6367C173MR	DC-DC-IC	PWM step-up, 1.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C1K	ek	XC6365C173MR	DC-DC-IC	PWM st-down, 300kHz, 1.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C1L	-	R3114N411C	Vdet-IC	4.1V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1L	eb	XC6367C183MR	DC-DC-IC	PWM step-up, 1.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C1L	ek	XC6365C183MR	DC-DC-IC	PWM st-down, 300kHz, 1.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C1M	-	R3114N421C	Vdet-IC	4.2V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1M	eb	XC6367C193MR	DC-DC-IC	PWM step-up, 1.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C1M	ek	XC6365C193MR	DC-DC-IC	PWM st-down, 300kHz, 1.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C1N	-	R3114N431C	Vdet-IC	4.3V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1P	-	R3114N441C	Vdet-IC	4.4V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1Q	-	R3114N451C	Vdet-IC	4.5V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1R	-	R3114N461C	Vdet-IC	4.6V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1S	-	R3114N471C	Vdet-IC	4.7V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1T	-	R3114N481C	Vdet-IC	4.8V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1U	-	R3114N491C	Vdet-IC	4.9V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
C1V	-	R3114N501C	Vdet-IC	5V±0.8%, -Reset PPO	SOT-23-5	28vdm	VD7	6g	Ric
c2	-	BD45E401G-M	Vdet-IC	4.0V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
C2	-	BL8555-12CQ	LVR-IC	LDO, 1.2V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C2	-	BL8555-12CRA	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C2	-	BL8555-12CRB	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C2	-	LR8555-12CQ	LVR-IC	LDO, 1.2V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C2	-	LR8555-12CRA	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C2	-	LR8555-12CRB	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C2	-	PI74STX1GT02CX	CMOS-Log	2-input NOR gate	SC-70-5	28	Log2	6a	Per
C2	-	PI74STX1GT02TX	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6a	Per
C2	-	R1111N421A	LVR-IC	LDO, Low noise, 4.2V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
C2	-	TC1054-2.7VCT713	LVR-IC	LDO, 2.7V±2%, 50mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
C2	-	TC4S81F	CMOS-Log	2-input AND gate	SSOP-5	28	Log3	6a	Tos
C2	ea	BL8555-12MQ	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C2	ea	BL8555-12MRA	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C2	ea	BL8555-12MRB	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C2	ea	LR8555-12MQ	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C2	ea	LR8555-12MRA	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C2	ea	LR8555-12MRB	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C2	ea	RN5VD22AA	Vdet-IC	2.2V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
C2	eu	BL8555-22MQ	LVR-IC	LDO, 2.2V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C2	eu	BL8555-22MRA	LVR-IC	LDO, 2.2V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C2	eu	BL8555-22MRB	LVR-IC	LDO, 2.2V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C2	eu	LR8555-22MQ	LVR-IC	LDO, 2.2V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C2	eu	LR8555-22MRA	LVR-IC	LDO, 2.2V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C2	eu	LR8555-22MRB	LVR-IC	LDO, 2.2V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C2	fg	BL8555-32MQ	LVR-IC	LDO, 3.2V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C2	fg	BL8555-32MRA	LVR-IC	LDO, 3.2V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C2	fg	BL8555-32MRB	LVR-IC	LDO, 3.2V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C2	fg	LR8555-32MQ	LVR-IC	LDO, 3.2V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C2	fg	LR8555-32MRA	LVR-IC	LDO, 3.2V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C2	fg	LR8555-32MRB	LVR-IC	LDO, 3.2V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C2	fh	BL8555-42MQ	LVR-IC	LDO, 4.2V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C2	fh	BL8555-42MRA	LVR-IC	LDO, 4.2V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C2	fh	BL8555-42MRB	LVR-IC	LDO, 4.2V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C2	fh	LR8555-42MQ	LVR-IC	LDO, 4.2V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C2	fh	LR8555-42MRA	LVR-IC	LDO, 4.2V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C2	fh	LR8555-42MRB	LVR-IC	LDO, 4.2V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C2	fk	BL8555-32CQ	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C2	fk	BL8555-32CRA	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C2	fk	BL8555-32CRB	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C2	fk	LR8555-32CQ	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C2	fk	LR8555-32CRA	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C2	fk	LR8555-32CRB	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C2	fm	BL8555-42CQ	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C2	fm	BL8555-42CRA	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C2	fm	BL8555-42CRB	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C2	fm	LR8555-42CQ	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C2	fm	LR8555-42CRA	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C2	fm	LR8555-42CRB	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C2	fp	BL8555-22CQ	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C2	fp	BL8555-22CRA	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C2	fp	BL8555-22CRB	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C2	fp	LR8555-22CQ	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C2	fp	LR8555-22CRA	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C2	fp	LR8555-22CRB	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C2-	-	RT9013B-25PU5	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Rct
C20	-	88C20-AF5	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C20	-	R1180N201B	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C20	-	RP110N201D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C20	eb	XC6367C202MR	DC-DC-IC	PWM step-up, 2.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C20	eh	XC6381C201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C20	ek	XC6365C202MR	DC-DC-IC	PWM st-down, 180kHz, 2.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C20G	-	88C20G-AF5	Vdet-IC	2.0V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C20L	-	88C20L-AF5	Vdet-IC	2.0V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C21	-	88C21-AF5	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C21	-	R1180N211B	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C21	-	RP110N211D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C21	eb	XC6367C212MR	DC-DC-IC	PWM step-up, 2.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C21	eh	XC6381C211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C21	ek	XC6365C212MR	DC-DC-IC	PWM st-down, 180kHz, 2.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C21G	-	88C21G-AF5	Vdet-IC	2.1V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C21L	-	88C21L-AF5	Vdet-IC	2.1V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C22	-	88C22-AF5	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C22	-	R1180N221B	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C22	-	RP110N221D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C22	eb	XC6367C222MR	DC-DC-IC	PWM step-up, 2.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C22	eh	XC6381C221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C22	ek	XC6365C222MR	DC-DC-IC	PWM st-down, 180kHz, 2.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C22G	-	88C22G-AF5	Vdet-IC	2.2V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C22L	-	88C22L-AF5	Vdet-IC	2.2V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C23	-	88C23-AF5	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C23	-	R1180N231B	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C23	-	RP110N231D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C23	-	TC53C2202ECT	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
C23	eb	XC6367C232MR	DC-DC-IC	PWM step-up, 2.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C23	eh	XC6381C231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C23	ek	XC6365C232MR	DC-DC-IC	PWM st-down, 180kHz, 2.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C23G	-	88C23G-AF5	Vdet-IC	2.3V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C23L	-	88C23L-AF5	Vdet-IC	2.3V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C24	-	88C24-AF5	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C24	-	R1180N241B	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C24	-	RP110N241D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C24	eb	XC6367C242MR	DC-DC-IC	PWM step-up, 2.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C24	eh	XC6381C241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C24	ek	XC6365C242MR	DC-DC-IC	PWM st-down, 180kHz, 2.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C24G	-	88C24G-AF5	Vdet-IC	2.4V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C24L	-	88C24L-AF5	Vdet-IC	2.4V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C25	-	74AHCT1G125GV	CMOS-Log	Bus buffer gate with 3-state output	SOT753	28	Log14	6a	Nxp
C25	-	88C25-AF5	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C25	-	R1180N251B	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C25	-	RP110N251D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C25	eb	XC6367C252MR	DC-DC-IC	PWM step-up, 2.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C25	eh	XC6381C251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C25	ek	XC6365C252MR	DC-DC-IC	PWM st-down, 180kHz, 2.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C25G	-	88C25G-AF5	Vdet-IC	2.5V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C25L	-	88C25L-AF5	Vdet-IC	2.5V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C26	-	74AHCT1G126GV	CMOS-Log	Bus buffer gate with 3-state output	SOT753	28	Log13	6a	Nxp
C26	-	88C26-AF5	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C26	-	R1180N261B	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C26	-	RP110N261D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C26	eb	XC6367C262MR	DC-DC-IC	PWM step-up, 2.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C26	eh	XC6381C261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C26	ek	XC6365C262MR	DC-DC-IC	PWM st-down, 180kHz, 2.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C26G	-	88C26G-AF5	Vdet-IC	2.6V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C26L	-	88C26L-AF5	Vdet-IC	2.6V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C27	-	88C27-AF5	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C27	-	R1180N271B	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C27	-	RP110N271D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C27	eb	XC6367C272MR	DC-DC-IC	PWM step-up, 2.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C27	eh	XC6381C271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C27	ek	XC6365C272MR	DC-DC-IC	PWM st-down, 180kHz, 2.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C27G	-	88C27G-AF5	Vdet-IC	2.7V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C27L	-	88C27L-AF5	Vdet-IC	2.7V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C28	-	88C28-AF5	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C28	-	R1180N281B	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C28	-	RP110N281D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C28	eb	XC6367C282MR	DC-DC-IC	PWM step-up, 2.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C28	eh	XC6381C281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C28	ek	XC6365C282MR	DC-DC-IC	PWM st-down, 180kHz, 2.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C28G	-	88C28G-AF5	Vdet-IC	2.8V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C28L	-	88C28L-AF5	Vdet-IC	2.8V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C29	-	88C29-AF5	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C29	-	R1180N291B	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C29	-	RP110N291D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C29	eb	XC6367C292MR	DC-DC-IC	PWM step-up, 2.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C29	eh	XC6381C291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C29	ek	XC6365C292MR	DC-DC-IC	PWM st-down, 180kHz, 2.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C29G	-	88C29G-AF5	Vdet-IC	2.9V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C29L	-	88C29L-AF5	Vdet-IC	2.9V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C2A	-	S-812C20AMC-C2AT2G	LVR-IC	2.0V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2A	-	XC6108C22AMR	Vdet-IC	2.2V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C2A	eb	XC6367C203MR	DC-DC-IC	PWM step-up, 2.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C2A	ek	XC6365C203MR	DC-DC-IC	PWM st-down, 300kHz, 2.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C2B	-	S-812C21AMC-C2BT2G	LVR-IC	2.1V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2B	-	XC6108C22BMR	Vdet-IC	2.2V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C2B	eb	XC6367C213MR	DC-DC-IC	PWM step-up, 2.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C2B	ek	XC6365C213MR	DC-DC-IC	PWM st-down, 300kHz, 2.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C2C	-	S-812C22AMC-C2CT2G	LVR-IC	2.2V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2C	-	XC6108C22CMR	Vdet-IC	2.2V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C2C	eb	XC6367C223MR	DC-DC-IC	PWM step-up, 2.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C2C	ek	XC6365C223MR	DC-DC-IC	PWM st-down, 300kHz, 2.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C2D	-	S-812C23AMC-C2DT2G	LVR-IC	2.3V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2D	-	XC6108C22DMR	Vdet-IC	2.2V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C2D	eb	XC6367C233MR	DC-DC-IC	PWM step-up, 2.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C2D	ek	XC6365C233MR	DC-DC-IC	PWM st-down, 300kHz, 2.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C2E	-	S-812C24AMC-C2ET2G	LVR-IC	2.4V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2E	eb	XC6367C243MR	DC-DC-IC	PWM step-up, 2.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C2E	ek	XC6365C243MR	DC-DC-IC	PWM st-down, 300kHz, 2.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C2F	-	S-812C25AMC-C2FT2G	LVR-IC	2.5V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2F	eb	XC6367C253MR	DC-DC-IC	PWM step-up, 2.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C2F	ek	XC6365C253MR	DC-DC-IC	PWM st-down, 300kHz, 2.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C2G	-	S-812C26AMC-C2GT2G	LVR-IC	2.6V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2H	-	S-812C27AMC-C2HT2G	LVR-IC	2.7V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2H	eb	XC6367C263MR	DC-DC-IC	PWM step-up, 2.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C2H	ek	XC6365C263MR	DC-DC-IC	PWM st-down, 300kHz, 2.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C2I	-	S-812C28AMC-C2IT2G	LVR-IC	2.8V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2J	-	S-812C29AMC-C2JT2G	LVR-IC	2.9V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2K	-	S-812C30AMC-C2KT2G	LVR-IC	3.0V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2K	eb	XC6367C273MR	DC-DC-IC	PWM step-up, 2.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C2K	ek	XC6365C273MR	DC-DC-IC	PWM st-down, 300kHz, 2.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C2L	-	S-812C31AMC-C2LT2G	LVR-IC	3.1V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2L	eb	XC6367C283MR	DC-DC-IC	PWM step-up, 2.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C2L	ek	XC6365C283MR	DC-DC-IC	PWM st-down, 300kHz, 2.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C2M	-	S-812C32AMC-C2MT2G	LVR-IC	3.2V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2M	eb	XC6367C293MR	DC-DC-IC	PWM step-up, 2.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C2M	ek	XC6365C293MR	DC-DC-IC	PWM st-down, 300kHz, 2.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C2N	-	S-812C33AMC-C2NT2G	LVR-IC	3.3V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2O	-	S-812C34AMC-C2OT2G	LVR-IC	3.4V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2P	-	S-812C35AMC-C2PT2G	LVR-IC	3.5V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2Q	-	S-812C36AMC-C2QT2G	LVR-IC	3.6V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C2R	-	S-812C37AMC-C2RT2G	LVR-IC	3.7V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2S	-	S-812C38AMC-C2ST2G	LVR-IC	3.8V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2T	-	S-812C39AMC-C2TT2G	LVR-IC	3.9V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2U	-	S-812C40AMC-C2UT2G	LVR-IC	4.0V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2V	-	S-812C41AMC-C2VT2G	LVR-IC	4.1V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2W	-	S-812C42AMC-C2WT2G	LVR-IC	4.2V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2X	-	S-812C43AMC-C2XT2G	LVR-IC	4.3V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2Y	-	S-812C44AMC-C2YT2G	LVR-IC	4.4V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C2Z	-	S-812C45AMC-C2ZT2G	LVR-IC	4.5V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
c3	-	BD45E411G-M	Vdet-IC	4.1V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
C3	-	BL8555-13CQ	LVR-IC	LDO, 1.3V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C3	-	BL8555-13CRA	LVR-IC	LDO, 1.3V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C3	-	BL8555-13CRB	LVR-IC	LDO, 1.3V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C3	-	LR8555-13CQ	LVR-IC	LDO, 1.3V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C3	-	LR8555-13CRA	LVR-IC	LDO, 1.3V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C3	-	LR8555-13CRB	LVR-IC	LDO, 1.3V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C3	-	R1111N431A	LVR-IC	LDO, Low noise, 4.3V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
C3	-	RT9169-30CB	LVR-IC	LDO, 3.0V±2%, 100mA, -CE	SOT-23-5	28cx	VR4	6g	Rct
C3	-	TC1054-3.0VCT713	LVR-IC	LDO, 3.0V±2%, 50mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
C3	-	TC4S01F	CMOS-Log	2-input NOR gate	SSOP-5	28	Log2	6a	Tos
C3	ea	BL8555-13MQ	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C3	ea	BL8555-13MRA	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C3	ea	BL8555-13MRB	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C3	ea	LR8555-13MQ	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C3	ea	LR8555-13MRA	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C3	ea	LR8555-13MRB	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C3	ea	RN5VD23AA	Vdet-IC	2.3V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
C3	eu	BL8555-23MQ	LVR-IC	LDO, 2.3V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C3	eu	BL8555-23MRA	LVR-IC	LDO, 2.3V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C3	eu	BL8555-23MRB	LVR-IC	LDO, 2.3V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C3	eu	LR8555-23MQ	LVR-IC	LDO, 2.3V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C3	eu	LR8555-23MRA	LVR-IC	LDO, 2.3V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C3	eu	LR8555-23MRB	LVR-IC	LDO, 2.3V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C3	fg	BL8555-33MQ	LVR-IC	LDO, 3.3V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C3	fg	BL8555-33MRA	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C3	fg	BL8555-33MRB	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C3	fg	LR8555-33MQ	LVR-IC	LDO, 3.3V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C3	fg	LR8555-33MRA	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C3	fg	LR8555-33MRB	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C3	fh	BL8555-43MQ	LVR-IC	LDO, 4.3V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C3	fh	BL8555-43MRA	LVR-IC	LDO, 4.3V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C3	fh	BL8555-43MRB	LVR-IC	LDO, 4.3V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C3	fh	LR8555-43MQ	LVR-IC	LDO, 4.3V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C3	fh	LR8555-43MRA	LVR-IC	LDO, 4.3V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C3	fh	LR8555-43MRB	LVR-IC	LDO, 4.3V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C3	fk	BL8555-33CQ	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C3	fk	BL8555-33CRA	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C3	fk	BL8555-33CRB	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C3	fk	LR8555-33CQ	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C3	fk	LR8555-33CRA	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C3	fk	LR8555-33CRB	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C3	fm	BL8555-43CQ	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C3	fm	BL8555-43CRA	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C3	fm	BL8555-43CRB	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C3	fm	LR8555-43CQ	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C3	fm	LR8555-43CRA	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C3	fm	LR8555-43CRB	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C3	fp	BL8555-23CQ	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C3	fp	BL8555-23CRA	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C3	fp	BL8555-23CRB	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C3	fp	LR8555-23CQ	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C3	fp	LR8555-23CRA	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C3	fp	LR8555-23CRB	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C3-	-	RT9013B-28PU5	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Rct
C3-	-	RT9169-30PB	LVR-IC	LDO, 3.0V±2%, 100mA, -CE	SOT-23-5	28cx	VR4	6g	Rct
C30	-	88C30-AF5	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C30	-	R1180N301B	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C30	-	RP110N301D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C30	eb	XC6367C302MR	DC-DC-IC	PWM step-up, 3.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C30	eh	XC6381C301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C30	ek	XC6365C302MR	DC-DC-IC	PWM st-down, 180kHz, 3.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C30G	-	88C30G-AF5	Vdet-IC	3.0V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C30L	-	88C30L-AF5	Vdet-IC	3.0V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C31	-	88C31-AF5	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C31	-	R1180N311B	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C31	-	RP110N311D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C31	eb	XC6367C312MR	DC-DC-IC	PWM step-up, 3.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C31	eh	XC6381C311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C31	ek	XC6365C312MR	DC-DC-IC	PWM st-down, 180kHz, 3.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C31G	-	88C31G-AF5	Vdet-IC	3.1V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C31L	-	88C31L-AF5	Vdet-IC	3.1V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C32	-	74AHCT1G32GV	CMOS-Log	2-input OR gate	SOT753	28	Log4	6a	Nxp
C32	-	88C32-AF5	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C32	-	R1180N321B	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C32	-	RP110N321D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C32	eb	XC6367C322MR	DC-DC-IC	PWM step-up, 3.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C32	eh	XC6381C321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C32	ek	XC6365C322MR	DC-DC-IC	PWM st-down, 180kHz, 3.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C32G	-	88C32G-AF5	Vdet-IC	3.2V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C32L	-	88C32L-AF5	Vdet-IC	3.2V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C33	-	88C33-AF5	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C33	-	LMS33460	Vdet-IC	3V, -Reset ODO	SC-70-5	28vdq	VD6	6a	Nsc
C33	-	R1180N331B	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C33	-	RP110N331D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C33	-	TC53C2302ECT	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
C33	eb	XC6367C332MR	DC-DC-IC	PWM step-up, 3.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C33	eh	XC6381C331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C33	ek	XC6365C332MR	DC-DC-IC	PWM st-down, 180kHz, 3.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C33G	-	88C33G-AF5	Vdet-IC	3.3V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C33L	-	88C33L-AF5	Vdet-IC	3.3V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C34	-	88C34-AF5	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C34	-	R1180N341B	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C34	-	RP110N341D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C34	eb	XC6367C342MR	DC-DC-IC	PWM step-up, 3.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C34	eh	XC6381C341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C34	ek	XC6365C342MR	DC-DC-IC	PWM st-down, 180kHz, 3.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C34G	-	88C34G-AF5	Vdet-IC	3.4V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C34L	-	88C34L-AF5	Vdet-IC	3.4V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C35	-	88C35-AF5	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C35	-	R1180N351B	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C35	-	RP110N351D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C35	eb	XC6367C352MR	DC-DC-IC	PWM step-up, 3.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C35	eh	XC6381C351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C35	ek	XC6365C352MR	DC-DC-IC	PWM st-down, 180kHz, 3.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C35G	-	88C35G-AF5	Vdet-IC	3.5V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C35L	-	88C35L-AF5	Vdet-IC	3.5V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C36	-	88C36-AF5	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C36	-	R1180N361B	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
C36	-	RP110N361D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C36	eb	XC6367C362MR	DC-DC-IC	PWM step-up, 3.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C36	eh	XC6381C361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C36	ek	XC6365C362MR	DC-DC-IC	PWM st-down, 180kHz, 3.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C36G	-	88C36G-AF5	Vdet-IC	3.6V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C36L	-	88C36L-AF5	Vdet-IC	3.6V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C37	-	88C37-AF5	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C37	-	OPA337NA	Op-IC	Single-supply, CMOS, 2.5..5.5V, 120dB, 3MHz	SOT-23-5	28opa	OP1	6a	Bb
C37	-	RP110N121D5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C37	eb	XC6367C372MR	DC-DC-IC	PWM step-up, 3.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C37	eh	XC6381C371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C37	ek	XC6365C372MR	DC-DC-IC	PWM st-down, 180kHz, 3.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C37G	-	88C37G-AF5	Vdet-IC	3.7V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C37L	-	88C37L-AF5	Vdet-IC	3.7V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C38	-	88C38-AF5	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C38	-	RP110N181D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C38	-	SN74LVC1G38DBV	CMOS-Log	2-input NAND gate (ODO)	SOT-23-5	28	Log17	6g	Ti
C38	eb	XC6367C382MR	DC-DC-IC	PWM step-up, 3.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C38	eh	XC6381C381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C38	ek	XC6365C382MR	DC-DC-IC	PWM st-down, 180kHz, 3.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C38G	-	88C38G-AF5	Vdet-IC	3.8V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C38L	-	88C38L-AF5	Vdet-IC	3.8V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C39	-	88C39-AF5	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C39	-	RP110N281D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
C39	eb	XC6367C392MR	DC-DC-IC	PWM step-up, 3.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C39	eh	XC6381C391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C39	ek	XC6365C392MR	DC-DC-IC	PWM st-down, 180kHz, 3.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C39G	-	88C39G-AF5	Vdet-IC	3.9V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C39L	-	88C39L-AF5	Vdet-IC	3.9V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C3A	-	S-812C46AMC-C3AT2G	LVR-IC	4.6V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C3A	-	XC6108C23AMR	Vdet-IC	2.3V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C3A	eb	XC6367C303MR	DC-DC-IC	PWM step-up, 3.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C3A	ek	XC6365C303MR	DC-DC-IC	PWM st-down, 300kHz, 3.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C3B	-	S-812C47AMC-C3BT2G	LVR-IC	4.7V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C3B	-	XC6108C23BMR	Vdet-IC	2.3V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C3B	eb	XC6367C313MR	DC-DC-IC	PWM step-up, 3.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C3B	ek	XC6365C313MR	DC-DC-IC	PWM st-down, 300kHz, 3.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C3C	-	S-812C48AMC-C3CT2G	LVR-IC	4.8V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C3C	-	XC6108C23CMR	Vdet-IC	2.3V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C3C	eb	XC6367C323MR	DC-DC-IC	PWM step-up, 3.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C3C	ek	XC6365C323MR	DC-DC-IC	PWM st-down, 300kHz, 3.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C3D	-	S-812C49AMC-C3DT2G	LVR-IC	4.9V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C3D	-	XC6108C23DMR	Vdet-IC	2.3V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C3D	eb	XC6367C333MR	DC-DC-IC	PWM step-up, 3.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C3D	ek	XC6365C333MR	DC-DC-IC	PWM st-down, 300kHz, 3.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C3E	-	S-812C50AMC-C3ET2G	LVR-IC	5.0V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C3E	eb	XC6367C343MR	DC-DC-IC	PWM step-up, 3.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C3E	ek	XC6365C343MR	DC-DC-IC	PWM st-down, 300kHz, 3.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C3F	-	S-812C51AMC-C3FT2G	LVR-IC	5.1V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C3F	eb	XC6367C353MR	DC-DC-IC	PWM step-up, 3.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C3F	ek	XC6365C353MR	DC-DC-IC	PWM st-down, 300kHz, 3.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C3G	-	S-812C52AMC-C3GT2G	LVR-IC	5.2V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C3H	-	S-812C53AMC-C3HT2G	LVR-IC	5.3V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C3H	eb	XC6367C363MR	DC-DC-IC	PWM step-up, 3.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C3H	ek	XC6365C363MR	DC-DC-IC	PWM st-down, 300kHz, 3.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C3I	-	S-812C54AMC-C3IT2G	LVR-IC	5.4V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C3J	-	S-812C55AMC-C3JT2G	LVR-IC	5.5V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C3K	-	S-812C56AMC-C3KT2G	LVR-IC	5.6V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C3K	eb	XC6367C373MR	DC-DC-IC	PWM step-up, 3.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C3K	ek	XC6365C373MR	DC-DC-IC	PWM st-down, 300kHz, 3.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C3L	-	S-812C57AMC-C3LT2G	LVR-IC	5.7V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C3L	eb	XC6367C383MR	DC-DC-IC	PWM step-up, 3.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C3L	ek	XC6365C383MR	DC-DC-IC	PWM st-down, 300kHz, 3.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C3M	-	S-812C58AMC-C3MT2G	LVR-IC	5.8V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C3M	eb	XC6367C393MR	DC-DC-IC	PWM step-up, 3.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C3M	ek	XC6365C393MR	DC-DC-IC	PWM st-down, 300kHz, 3.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C3N	-	S-812C59AMC-C3NT2G	LVR-IC	5.9V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
C3O	-	S-812C60AMC-C3OT2G	LVR-IC	6.0V±2%, 50mA	SOT-23-5	28vu	VR1	6r	Sii
c4	-	BD45E421G-M	Vdet-IC	4.2V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
C4	-	BL8555-14CQ	LVR-IC	LDO, 1.4V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C4	-	BL8555-14CRA	LVR-IC	LDO, 1.4V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C4	-	BL8555-14CRB	LVR-IC	LDO, 1.4V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C4	-	LR8555-14CQ	LVR-IC	LDO, 1.4V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C4	-	LR8555-14CRA	LVR-IC	LDO, 1.4V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C4	-	LR8555-14CRB	LVR-IC	LDO, 1.4V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C4	-	PI74STX1GT04CX	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	Per
C4	-	PI74STX1GT04TX	CMOS-Log	Inverter	SOT-23-5	28	Log6	6a	Per
C4	-	R1111N441A	LVR-IC	LDO, Low noise, 4.4V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
C4	-	TC1054-3.3VCT713	LVR-IC	LDO, 3.3V±2%, 50mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
C4	-	TC4S71F	CMOS-Log	2-input OR gate	SSOP-5	28	Log4	6a	Tos
C4	ea	BL8555-14MQ	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C4	ea	BL8555-14MRA	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C4	ea	BL8555-14MRB	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C4	ea	LR8555-14MQ	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C4	ea	LR8555-14MRA	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C4	ea	LR8555-14MRB	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C4	ea	RN5VD24AA	Vdet-IC	2.4V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
C4	eu	BL8555-24MQ	LVR-IC	LDO, 2.4V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C4	eu	BL8555-24MRA	LVR-IC	LDO, 2.4V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C4	eu	BL8555-24MRB	LVR-IC	LDO, 2.4V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C4	eu	LR8555-24MQ	LVR-IC	LDO, 2.4V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C4	eu	LR8555-24MRA	LVR-IC	LDO, 2.4V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C4	eu	LR8555-24MRB	LVR-IC	LDO, 2.4V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C4	fg	BL8555-34MQ	LVR-IC	LDO, 3.4V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C4	fg	BL8555-34MRA	LVR-IC	LDO, 3.4V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C4	fg	BL8555-34MRB	LVR-IC	LDO, 3.4V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C4	fg	LR8555-34MQ	LVR-IC	LDO, 3.4V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C4	fg	LR8555-34MRA	LVR-IC	LDO, 3.4V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C4	fg	LR8555-34MRB	LVR-IC	LDO, 3.4V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C4	fh	BL8555-44MQ	LVR-IC	LDO, 4.4V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C4	fh	BL8555-44MRA	LVR-IC	LDO, 4.4V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C4	fh	BL8555-44MRB	LVR-IC	LDO, 4.4V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C4	fh	LR8555-44MQ	LVR-IC	LDO, 4.4V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C4	fh	LR8555-44MRA	LVR-IC	LDO, 4.4V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C4	fh	LR8555-44MRB	LVR-IC	LDO, 4.4V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C4	fk	BL8555-34CQ	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C4	fk	BL8555-34CRB	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C4	fk	BL8555-34PCA	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C4	fk	LR8555-34CQ	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C4	fk	LR8555-34CRB	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C4	fk	LR8555-34PCA	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C4	fm	BL8555-44CQ	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C4	fm	BL8555-44CRA	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C4	fm	BL8555-44CRB	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C4	fm	LR8555-44CQ	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C4	fm	LR8555-44CRA	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C4	fm	LR8555-44CRB	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C4	fp	BL8555-24CQ	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C4	fp	BL8555-24CRA	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C4	fp	BL8555-24CRB	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C4	fp	LR8555-24CQ	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C4	fp	LR8555-24CRA	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C4	fp	LR8555-24CRB	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C4-	-	RT9013B-2HPU5	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Rct
C40	-	88C40-AF5	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C40	eb	XC6367C402MR	DC-DC-IC	PWM step-up, 4.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C40	eh	XC6381C401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C40	ek	XC6365C402MR	DC-DC-IC	PWM st-down, 180kHz, 4.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C40G	-	88C40G-AF5	Vdet-IC	4.0V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C40L	-	88C40L-AF5	Vdet-IC	4.0V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C41	-	88C41-AF5	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C41	eb	XC6367C412MR	DC-DC-IC	PWM step-up, 4.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C41	eh	XC6381C411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C41	ek	XC6365C412MR	DC-DC-IC	PWM st-down, 180kHz, 4.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C41G	-	88C41G-AF5	Vdet-IC	4.1V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C41L	-	88C41L-AF5	Vdet-IC	4.1V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C42	-	88C42-AF5	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C42	eb	XC6367C422MR	DC-DC-IC	PWM step-up, 4.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C42	eh	XC6381C421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C42	ek	XC6365C422MR	DC-DC-IC	PWM st-down, 180kHz, 4.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C42G	-	88C42G-AF5	Vdet-IC	4.2V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C42L	-	88C42L-AF5	Vdet-IC	4.2V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C43	-	88C43-AF5	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C43	-	TC53C2402ECT	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
C43	eb	XC6367C432MR	DC-DC-IC	PWM step-up, 4.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C43	eh	XC6381C431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C43	ek	XC6365C432MR	DC-DC-IC	PWM st-down, 180kHz, 4.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C43G	-	88C43G-AF5	Vdet-IC	4.3V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C43L	-	88C43L-AF5	Vdet-IC	4.3V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C44	-	88C44-AF5	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C44	eb	XC6367C442MR	DC-DC-IC	PWM step-up, 4.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C44	eh	XC6381C441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C44	ek	XC6365C442MR	DC-DC-IC	PWM st-down, 180kHz, 4.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C44G	-	88C44G-AF5	Vdet-IC	4.4V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C44L	-	88C44L-AF5	Vdet-IC	4.4V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C45	-	88C45-AF5	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C45	eb	XC6367C452MR	DC-DC-IC	PWM step-up, 4.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C45	eh	XC6381C451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C45	ek	XC6365C452MR	DC-DC-IC	PWM st-down, 180kHz, 4.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C45G	-	88C45G-AF5	Vdet-IC	4.5V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C45L	-	88C45L-AF5	Vdet-IC	4.5V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C46	-	88C46-AF5	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C46	eb	XC6367C462MR	DC-DC-IC	PWM step-up, 4.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C46	eh	XC6381C461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C46	ek	XC6365C462MR	DC-DC-IC	PWM st-down, 180kHz, 4.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C46G	-	88C46G-AF5	Vdet-IC	4.6V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C46L	-	88C46L-AF5	Vdet-IC	4.6V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C47	-	88C47-AF5	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C47	eb	XC6367C472MR	DC-DC-IC	PWM step-up, 4.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C47	eh	XC6381C471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C47	ek	XC6365C472MR	DC-DC-IC	PWM st-down, 180kHz, 4.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C47G	-	88C47G-AF5	Vdet-IC	4.7V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C47L	-	88C47L-AF5	Vdet-IC	4.7V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C48	-	88C48-AF5	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C48	eb	XC6367C482MR	DC-DC-IC	PWM step-up, 4.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C48	eh	XC6381C481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C48	ek	XC6365C482MR	DC-DC-IC	PWM st-down, 180kHz, 4.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C48G	-	88C48G-AF5	Vdet-IC	4.8V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C48L	-	88C48L-AF5	Vdet-IC	4.8V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C49	-	88C49-AF5	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C49	eb	XC6367C492MR	DC-DC-IC	PWM step-up, 4.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C49	eh	XC6381C491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C49	ek	XC6365C492MR	DC-DC-IC	PWM st-down, 180kHz, 4.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C49G	-	88C49G-AF5	Vdet-IC	4.9V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C49L	-	88C49L-AF5	Vdet-IC	4.9V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C4A	-	S-812C20BMC-C4AT2G	LVR-IC	2.0V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4A	-	XC6108C24AMR	Vdet-IC	2.4V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C4A	eb	XC6367C403MR	DC-DC-IC	PWM step-up, 4.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C4A	ek	XC6365C403MR	DC-DC-IC	PWM st-down, 300kHz, 4.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C4B	-	S-812C21BMC-C4BT2G	LVR-IC	2.1V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4B	-	XC6108C24BMR	Vdet-IC	2.4V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C4B	eb	XC6367C413MR	DC-DC-IC	PWM step-up, 4.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C4B	ek	XC6365C413MR	DC-DC-IC	PWM st-down, 300kHz, 4.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C4C	-	S-812C22BMC-C4CT2G	LVR-IC	2.2V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4C	-	XC6108C24CMR	Vdet-IC	2.4V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C4C	eb	XC6367C423MR	DC-DC-IC	PWM step-up, 4.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C4C	ek	XC6365C423MR	DC-DC-IC	PWM st-down, 300kHz, 4.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C4D	-	S-812C23BMC-C4DT2G	LVR-IC	2.3V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4D	-	XC6108C24DMR	Vdet-IC	2.4V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C4D	eb	XC6367C433MR	DC-DC-IC	PWM step-up, 4.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C4D	ek	XC6365C433MR	DC-DC-IC	PWM st-down, 300kHz, 4.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C4E	-	S-812C24BMC-C4ET2G	LVR-IC	2.4V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4E	eb	XC6367C443MR	DC-DC-IC	PWM step-up, 4.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C4E	ek	XC6365C443MR	DC-DC-IC	PWM st-down, 300kHz, 4.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C4F	-	S-812C25BMC-C4FT2G	LVR-IC	2.5V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4F	eb	XC6367C453MR	DC-DC-IC	PWM step-up, 4.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C4F	ek	XC6365C453MR	DC-DC-IC	PWM st-down, 300kHz, 4.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C4G	-	S-812C26BMC-C4GT2G	LVR-IC	2.6V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4H	-	S-812C27BMC-C4HT2G	LVR-IC	2.7V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4H	eb	XC6367C463MR	DC-DC-IC	PWM step-up, 4.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C4H	ek	XC6365C463MR	DC-DC-IC	PWM st-down, 300kHz, 4.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C4I	-	S-812C28BMC-C4IT2G	LVR-IC	2.8V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4J	-	S-812C29BMC-C4JT2G	LVR-IC	2.9V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4K	-	S-812C30BMC-C4KT2G	LVR-IC	3.0V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4K	eb	XC6367C473MR	DC-DC-IC	PWM step-up, 4.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C4K	ek	XC6365C473MR	DC-DC-IC	PWM st-down, 300kHz, 4.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C4L	-	S-812C31BMC-C4LT2G	LVR-IC	3.1V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4L	eb	XC6367C483MR	DC-DC-IC	PWM step-up, 4.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C4L	ek	XC6365C483MR	DC-DC-IC	PWM st-down, 300kHz, 4.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C4M	-	S-812C32BMC-C4MT2G	LVR-IC	3.2V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4M	eb	XC6367C493MR	DC-DC-IC	PWM step-up, 4.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C4M	ek	XC6365C493MR	DC-DC-IC	PWM st-down, 300kHz, 4.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C4N	-	S-812C33BMC-C4NT2G	LVR-IC	3.3V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4O	-	S-812C34BMC-C4OT2G	LVR-IC	3.4V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4P	-	S-812C35BMC-C4PT2G	LVR-IC	3.5V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4Q	-	S-812C36BMC-C4QT2G	LVR-IC	3.6V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4R	-	S-812C37BMC-C4RT2G	LVR-IC	3.7V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4S	-	S-812C38BMC-C4ST2G	LVR-IC	3.8V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4T	-	S-812C39BMC-C4TT2G	LVR-IC	3.9V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4U	-	S-812C40BMC-C4UT2G	LVR-IC	4.0V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4V	-	S-812C41BMC-C4VT2G	LVR-IC	4.1V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4W	-	S-812C42BMC-C4WT2G	LVR-IC	4.2V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C4X	-	S-812C43BMC-C4XT2G	LVR-IC	4.3V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4Y	-	S-812C44BMC-C4YT2G	LVR-IC	4.4V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C4Z	-	S-812C45BMC-C4ZT2G	LVR-IC	4.5V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
c5	-	BD45E431G-M	Vdet-IC	4.3V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
C5	-	BL8555-15CQ	LVR-IC	LDO, 1.5V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C5	-	BL8555-15CRA	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C5	-	BL8555-15CRB	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C5	-	LR8555-15CQ	LVR-IC	LDO, 1.5V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C5	-	LR8555-15CRA	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C5	-	LR8555-15CRB	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C5	-	R1111N451A	LVR-IC	LDO, Low noise, 4.5V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
C5	-	TC4S69F	CMOS-Log	Inverter	SSOP-5	28	Log6	6a	Tos
C5	ea	BL8555-15MQ	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C5	ea	BL8555-15MRA	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C5	ea	BL8555-15MRB	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C5	ea	LR8555-15MQ	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C5	ea	LR8555-15MRA	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C5	ea	LR8555-15MRB	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C5	ea	RN5VD25AA	Vdet-IC	2.5V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
C5	eu	BL8555-25MQ	LVR-IC	LDO, 2.5V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C5	eu	BL8555-25MRA	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C5	eu	BL8555-25MRB	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C5	eu	LR8555-25MQ	LVR-IC	LDO, 2.5V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C5	eu	LR8555-25MRA	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C5	eu	LR8555-25MRB	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C5	fg	BL8555-35MQ	LVR-IC	LDO, 3.5V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C5	fg	BL8555-35MRA	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C5	fg	BL8555-35MRB	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C5	fg	LR8555-35MQ	LVR-IC	LDO, 3.5V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C5	fg	LR8555-35MRA	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C5	fg	LR8555-35MRB	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C5	fh	BL8555-45MQ	LVR-IC	LDO, 4.5V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C5	fh	BL8555-45MRA	LVR-IC	LDO, 4.5V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C5	fh	BL8555-45MRB	LVR-IC	LDO, 4.5V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C5	fh	LR8555-45MQ	LVR-IC	LDO, 4.5V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C5	fh	LR8555-45MRA	LVR-IC	LDO, 4.5V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C5	fh	LR8555-45MRB	LVR-IC	LDO, 4.5V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C5	fk	BL8555-35CQ	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C5	fk	BL8555-35CRA	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C5	fk	BL8555-35CRB	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C5	fk	LR8555-35CQ	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C5	fk	LR8555-35CRA	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C5	fk	LR8555-35CRB	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C5	fm	BL8555-45CQ	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C5	fm	BL8555-45CRA	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C5	fm	BL8555-45CRB	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C5	fm	LR8555-45CQ	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C5	fm	LR8555-45CRA	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C5	fm	LR8555-45CRB	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C5	fp	BL8555-25CQ	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C5	fp	BL8555-25CRA	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C5	fp	BL8555-25CRB	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C5	fp	LR8555-25CQ	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C5	fp	LR8555-25CRA	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C5	fp	LR8555-25CRB	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C5-	-	RT9013B-33PU5	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Rct
C50	-	88C50-AF5	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C50	eb	XC6367C502MR	DC-DC-IC	PWM step-up, 5.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C50	eh	XC6381C501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C50	ek	XC6365C502MR	DC-DC-IC	PWM st-down, 180kHz, 5.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C50G	-	88C50G-AF5	Vdet-IC	5.0V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C50L	-	88C50L-AF5	Vdet-IC	5.0V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C51	-	88C51-AF5	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C51	eb	XC6367C512MR	DC-DC-IC	PWM step-up, 5.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C51	eh	XC6381C511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C51	ek	XC6365C512MR	DC-DC-IC	PWM st-down, 180kHz, 5.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C51G	-	88C51G-AF5	Vdet-IC	5.1V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C51L	-	88C51L-AF5	Vdet-IC	5.1V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C52	-	88C52-AF5	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C52	eb	XC6367C522MR	DC-DC-IC	PWM step-up, 5.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C52	eh	XC6381C521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C52	ek	XC6365C522MR	DC-DC-IC	PWM st-down, 180kHz, 5.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C52G	-	88C52G-AF5	Vdet-IC	5.2V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C52L	-	88C52L-AF5	Vdet-IC	5.2V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C53	-	88C53-AF5	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C53	-	TC53C2502ECT	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
C53	eb	XC6367C532MR	DC-DC-IC	PWM step-up, 5.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C53	eh	XC6381C531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C53	ek	XC6365C532MR	DC-DC-IC	PWM st-down, 180kHz, 5.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C53G	-	88C53G-AF5	Vdet-IC	5.3V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C53L	-	88C53L-AF5	Vdet-IC	5.3V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C54	-	88C54-AF5	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C54	eb	XC6367C542MR	DC-DC-IC	PWM step-up, 5.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C54	eh	XC6381C541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C54	ek	XC6365C542MR	DC-DC-IC	PWM st-down, 180kHz, 5.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C54G	-	88C54G-AF5	Vdet-IC	5.4V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C54L	-	88C54L-AF5	Vdet-IC	5.4V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C55	-	88C55-AF5	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C55	eb	XC6367C552MR	DC-DC-IC	PWM step-up, 5.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C55	eh	XC6381C551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C55	ek	XC6365C552MR	DC-DC-IC	PWM st-down, 180kHz, 5.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C55G	-	88C55G-AF5	Vdet-IC	5.5V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C55L	-	88C55L-AF5	Vdet-IC	5.5V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C56	-	88C56-AF5	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C56	eb	XC6367C562MR	DC-DC-IC	PWM step-up, 5.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C56	eh	XC6381C561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C56	ek	XC6365C562MR	DC-DC-IC	PWM st-down, 180kHz, 5.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C56G	-	88C56G-AF5	Vdet-IC	5.6V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C56L	-	88C56L-AF5	Vdet-IC	5.6V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C57	-	88C57-AF5	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C57	eb	XC6367C572MR	DC-DC-IC	PWM step-up, 5.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C57	eh	XC6381C571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C57	ek	XC6365C572MR	DC-DC-IC	PWM st-down, 180kHz, 5.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C57G	-	88C57G-AF5	Vdet-IC	5.7V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C57L	-	88C57L-AF5	Vdet-IC	5.7V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C58	-	88C58-AF5	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C58	eb	XC6367C582MR	DC-DC-IC	PWM step-up, 5.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C58	eh	XC6381C581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C58	ek	XC6365C582MR	DC-DC-IC	PWM st-down, 180kHz, 5.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C58G	-	88C58G-AF5	Vdet-IC	5.8V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C58L	-	88C58L-AF5	Vdet-IC	5.8V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C59	-	88C59-AF5	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C59	eb	XC6367C592MR	DC-DC-IC	PWM step-up, 5.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C59	eh	XC6381C591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C59	ek	XC6365C592MR	DC-DC-IC	PWM st-down, 180kHz, 5.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C59G	-	88C59G-AF5	Vdet-IC	5.9V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C59L	-	88C59L-AF5	Vdet-IC	5.9V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C5A	-	S-812C46BMC-C5AT2G	LVR-IC	4.6V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C5A	-	XC6108C25AMR	Vdet-IC	2.5V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C5A	eb	XC6367C503MR	DC-DC-IC	PWM step-up, 5.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C5A	ek	XC6365C503MR	DC-DC-IC	PWM st-down, 300kHz, 5.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C5B	-	S-812C47BMC-C5BT2G	LVR-IC	4.7V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C5B	-	XC6108C25BMR	Vdet-IC	2.5V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C5B	eb	XC6367C513MR	DC-DC-IC	PWM step-up, 5.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C5B	ek	XC6365C513MR	DC-DC-IC	PWM st-down, 300kHz, 5.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C5C	-	S-812C48BMC-C5CT2G	LVR-IC	4.8V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C5C	-	XC6108C25CMR	Vdet-IC	2.5V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C5C	eb	XC6367C523MR	DC-DC-IC	PWM step-up, 5.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C5C	ek	XC6365C523MR	DC-DC-IC	PWM st-down, 300kHz, 5.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C5D	-	S-812C49BMC-C5DT2G	LVR-IC	4.9V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C5D	-	XC6108C25DMR	Vdet-IC	2.5V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C5D	eb	XC6367C533MR	DC-DC-IC	PWM step-up, 5.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C5D	ek	XC6365C533MR	DC-DC-IC	PWM st-down, 300kHz, 5.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C5E	-	S-812C50BMC-C5ET2G	LVR-IC	5.0V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C5E	eb	XC6367C543MR	DC-DC-IC	PWM step-up, 5.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C5E	ek	XC6365C543MR	DC-DC-IC	PWM st-down, 300kHz, 5.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C5F	-	S-812C51BMC-C5FT2G	LVR-IC	5.1V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C5F	eb	XC6367C553MR	DC-DC-IC	PWM step-up, 5.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C5F	ek	XC6365C553MR	DC-DC-IC	PWM st-down, 300kHz, 5.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C5G	-	S-812C52BMC-C5GT2G	LVR-IC	5.2V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C5H	-	S-812C53BMC-C5HT2G	LVR-IC	5.3V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C5H	eb	XC6367C563MR	DC-DC-IC	PWM step-up, 5.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C5H	ek	XC6365C563MR	DC-DC-IC	PWM st-down, 300kHz, 5.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C5I	-	S-812C54BMC-C5IT2G	LVR-IC	5.4V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C5J	-	S-812C55BMC-C5JT2G	LVR-IC	5.5V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C5K	-	S-812C56BMC-C5KT2G	LVR-IC	5.6V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C5K	eb	XC6367C573MR	DC-DC-IC	PWM step-up, 5.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C5K	ek	XC6365C573MR	DC-DC-IC	PWM st-down, 300kHz, 5.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C5L	-	S-812C57BMC-C5LT2G	LVR-IC	5.7V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C5L	eb	XC6367C583MR	DC-DC-IC	PWM step-up, 5.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C5L	ek	XC6365C583MR	DC-DC-IC	PWM st-down, 300kHz, 5.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C5M	-	S-812C58BMC-C5MT2G	LVR-IC	5.8V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C5M	eb	XC6367C593MR	DC-DC-IC	PWM step-up, 5.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C5M	ek	XC6365C593MR	DC-DC-IC	PWM st-down, 300kHz, 5.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C5N	-	S-812C59BMC-C5NT2G	LVR-IC	5.9V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
C5O	-	S-812C60BMC-C5OT2G	LVR-IC	6.0V±2%, 50mA, +CE	SOT-23-5	28vrt	VR4	6r	Sii
c6	-	BD45E441G-M	Vdet-IC	4.4V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
C6	-	BL8555-16CQ	LVR-IC	LDO, 1.6V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C6	-	BL8555-16CRA	LVR-IC	LDO, 1.6V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C6	-	BL8555-16CRB	LVR-IC	LDO, 1.6V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C6	-	LR8555-16CQ	LVR-IC	LDO, 1.6V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C6	-	LR8555-16CRA	LVR-IC	LDO, 1.6V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C6	-	LR8555-16CRB	LVR-IC	LDO, 1.6V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C6	-	R1111N461A	LVR-IC	LDO, Low noise, 4.6V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
C6	-	TC1054-5.0VCT713	LVR-IC	LDO, 5.0V±2%, 50mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
C6	-	TC4SU69F	CMOS-Log	Inverter	SSOP-5	28	Log6	6a	Tos
C6	ea	BL8555-16MQ	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C6	ea	BL8555-16MRA	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C6	ea	BL8555-16MRB	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C6	ea	LR8555-16MQ	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C6	ea	LR8555-16MRA	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C6	ea	LR8555-16MRB	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C6	ea	RN5VD26AA	Vdet-IC	2.6V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
C6	eu	BL8555-26MQ	LVR-IC	LDO, 2.6V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C6	eu	BL8555-26MRA	LVR-IC	LDO, 2.6V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C6	eu	BL8555-26MRB	LVR-IC	LDO, 2.6V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C6	eu	LR8555-26MQ	LVR-IC	LDO, 2.6V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C6	eu	LR8555-26MRA	LVR-IC	LDO, 2.6V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C6	eu	LR8555-26MRB	LVR-IC	LDO, 2.6V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C6	fg	BL8555-36MQ	LVR-IC	LDO, 3.6V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C6	fg	BL8555-36MRA	LVR-IC	LDO, 3.6V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C6	fg	BL8555-36MRB	LVR-IC	LDO, 3.6V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C6	fg	LR8555-36MQ	LVR-IC	LDO, 3.6V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C6	fg	LR8555-36MRA	LVR-IC	LDO, 3.6V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C6	fg	LR8555-36MRB	LVR-IC	LDO, 3.6V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C6	fh	BL8555-46MQ	LVR-IC	LDO, 4.6V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C6	fh	BL8555-46MRA	LVR-IC	LDO, 4.6V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C6	fh	BL8555-46MRB	LVR-IC	LDO, 4.6V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C6	fh	LR8555-46MQ	LVR-IC	LDO, 4.6V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C6	fh	LR8555-46MRA	LVR-IC	LDO, 4.6V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C6	fh	LR8555-46MRB	LVR-IC	LDO, 4.6V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C6	fk	BL8555-36CQ	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C6	fk	BL8555-36CRA	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C6	fk	BL8555-36CRB	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C6	fk	LR8555-36CQ	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C6	fk	LR8555-36CRA	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C6	fk	LR8555-36CRB	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C6	fm	BL8555-46CQ	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C6	fm	BL8555-46CRA	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C6	fm	BL8555-46CRB	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C6	fm	LR8555-46CQ	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C6	fm	LR8555-46CRA	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C6	fm	LR8555-46CRB	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C6	fp	BL8555-26CQ	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C6	fp	BL8555-26CRA	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C6	fp	BL8555-26CRB	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C6	fp	LR8555-26CQ	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C6	fp	LR8555-26CRA	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C6	fp	LR8555-26CRB	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C6-	-	RT9013B-35PU5	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Rct



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C6-	-	RT9169-45PB	LVR-IC	LDO, 4.5V±2%, 100mA, -CE	SOT-23-5	28cx	VR4	6g	Rct
C60	-	88C60-AF5	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Utc
C60	eb	XC6367C602MR	DC-DC-IC	PWM step-up, 6.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C60	eh	XC6381C601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C60	ek	XC6365C602MR	DC-DC-IC	PWM st-down, 180kHz, 6.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C609	-	BL8506-09CRN	Vdet-IC	0.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C609	-	LC9006CB5TR09C	Vdet-IC	0.9V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C60G	-	88C60G-AF5	Vdet-IC	6.0V±2%, -Reset PPO, halogen free	SOT-23-5	28vdo	VD3	6a	Utc
C60L	-	88C60L-AF5	Vdet-IC	6.0V±2%, -Reset PPO, lead free	SOT-23-5	28vdo	VD3	6a	Utc
C61	eb	XC6367C612MR	DC-DC-IC	PWM step-up, 6.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C61	eh	XC6381C611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C610	-	BL8506-10CRN	Vdet-IC	1.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C610	-	LC9006CB5TR10C	Vdet-IC	1.0V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C611	-	BL8506-11CRN	Vdet-IC	1.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C611	-	LC9006CB5TR11C	Vdet-IC	1.1V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C612	-	BL8506-12CRN	Vdet-IC	1.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C612	-	LC9006CB5TR12C	Vdet-IC	1.2V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C613	-	BL8506-13CRN	Vdet-IC	1.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C613	-	LC9006CB5TR13C	Vdet-IC	1.3V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C614	-	BL8506-14CRN	Vdet-IC	1.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C614	-	LC9006CB5TR14C	Vdet-IC	1.4V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C615	-	BL8506-15CRN	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C615	-	LC9006CB5TR15C	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C616	-	BL8506-16CRN	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C616	-	LC9006CB5TR16C	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C617	-	BL8506-17CRN	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C617	-	LC9006CB5TR17C	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C618	-	BL8506-18CRN	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C618	-	LC9006CB5TR18C	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C619	-	BL8506-19CRN	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C619	-	LC9006CB5TR19C	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C62	eb	XC6367C622MR	DC-DC-IC	PWM step-up, 6.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C62	eh	XC6381C621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C620	-	BL8506-20CRN	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C620	-	LC9006CB5TR20C	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C621	-	BL8506-21CRN	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C621	-	LC9006CB5TR21C	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C622	-	BL8506-22CRN	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C622	-	LC9006CB5TR22C	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C623	-	BL8506-23CRN	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C623	-	LC9006CB5TR23C	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C624	-	BL8506-24CRN	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C624	-	LC9006CB5TR24C	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C625	-	BL8506-25CRN	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C625	-	LC9006CB5TR25C	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C626	-	BL8506-26CRN	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C626	-	LC9006CB5TR26C	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C627	-	BL8506-27CRN	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C627	-	LC9006CB5TR27C	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C628	-	BL8506-28CRN	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C628	-	LC9006CB5TR28C	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C629	-	BL8506-29CRN	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C629	-	LC9006CB5TR29C	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C63	-	TC53C2602ECT	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
C63	eb	XC6367C632MR	DC-DC-IC	PWM step-up, 6.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C63	eh	XC6381C631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C630	-	BL8506-30CRN	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C630	-	LC9006CB5TR30C	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C631	-	BL8506-31CRN	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C631	-	LC9006CB5TR31C	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C632	-	BL8506-32CRN	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C632	-	LC9006CB5TR32C	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C633	-	BL8506-33CRN	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C633	-	LC9006CB5TR33C	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C634	-	BL8506-34CRN	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C634	-	LC9006CB5TR34C	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C635	-	BL8506-35CRN	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C635	-	LC9006CB5TR35C	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C636	-	BL8506-36CRN	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C636	-	LC9006CB5TR36C	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C637	-	BL8506-37CRN	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C637	-	LC9006CB5TR37C	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C638	-	BL8506-38CRN	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C638	-	LC9006CB5TR38C	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C639	-	BL8506-39CRN	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C639	-	LC9006CB5TR39C	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C64	eb	XC6367C642MR	DC-DC-IC	PWM step-up, 6.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C64	eh	XC6381C641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C640	-	BL8506-40CRN	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C640	-	LC9006CB5TR40C	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C641	-	BL8506-41CRN	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C641	-	LC9006CB5TR41C	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C642	-	BL8506-42CRN	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C642	-	LC9006CB5TR42C	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C643	-	BL8506-43CRN	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C643	-	LC9006CB5TR43C	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C644	-	BL8506-44CRN	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C644	-	LC9006CB5TR44C	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C645	-	BL8506-45CRN	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C645	-	LC9006CB5TR45C	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C646	-	BL8506-46CRN	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C646	-	LC9006CB5TR46C	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C647	-	BL8506-47CRN	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C647	-	LC9006CB5TR47C	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C648	-	BL8506-48CRN	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C648	-	LC9006CB5TR48C	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C649	-	BL8506-49CRN	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C649	-	LC9006CB5TR49C	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C65	eb	XC6367C652MR	DC-DC-IC	PWM step-up, 6.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C65	eh	XC6381C651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C650	-	BL8506-50CRN	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C650	-	LC9006CB5TR50C	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C651	-	BL8506-51CRN	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C651	-	LC9006CB5TR51C	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C652	-	BL8506-52CRN	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C652	-	LC9006CB5TR52C	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C653	-	BL8506-53CRN	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C653	-	LC9006CB5TR53C	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C654	-	BL8506-54CRN	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C654	-	LC9006CB5TR54C	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C655	-	BL8506-55CRN	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C655	-	LC9006CB5TR55C	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C656	-	BL8506-56CRN	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C656	-	LC9006CB5TR56C	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C657	-	BL8506-57CRN	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C657	-	LC9006CB5TR57C	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C658	-	BL8506-58CRN	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C658	-	LC9006CB5TR58C	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C659	-	BL8506-59CRN	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C659	-	LC9006CB5TR59C	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6a	Lch
C66	-	74AHCT1G66GV	CMOS-Log	Single-pole single-throw analog switch	SOT753	28	Log16	6a	Nxp
C66	eh	XC6381C661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C660	-	BL8506-60CRN	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Shb
C660	-	LC9006CB5TR60C	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23-5	28vd1	VR7	6a	Lch
C67	eh	XC6381C671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C68	eh	XC6381C681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C69	eh	XC6381C691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C6A	-	XC6108C26AMR	Vdet-IC	2.6V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C6A	eb	XC6367C603MR	DC-DC-IC	PWM step-up, 6.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C6A	ek	XC6365C603MR	DC-DC-IC	PWM st-down, 300kHz, 6.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
C6B	-	XC6108C26BMR	Vdet-IC	2.6V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C6B	eb	XC6367C613MR	DC-DC-IC	PWM step-up, 6.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C6C	-	XC6108C26CMR	Vdet-IC	2.6V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C6C	eb	XC6367C623MR	DC-DC-IC	PWM step-up, 6.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C6D	-	XC6108C26DMR	Vdet-IC	2.6V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C6D	eb	XC6367C633MR	DC-DC-IC	PWM step-up, 6.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C6E	eb	XC6367C643MR	DC-DC-IC	PWM step-up, 6.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
C6F	eb	XC6367C653MR	DC-DC-IC	PWM step-up, 6.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
c7	-	BD45E451G-M	Vdet-IC	4.5V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
C7	-	BL8555-17CQ	LVR-IC	LDO, 1.7V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C7	-	BL8555-17CRA	LVR-IC	LDO, 1.7V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C7	-	BL8555-17CRB	LVR-IC	LDO, 1.7V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C7	-	LR8555-17CQ	LVR-IC	LDO, 1.7V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C7	-	LR8555-17CRA	LVR-IC	LDO, 1.7V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C7	-	LR8555-17CRB	LVR-IC	LDO, 1.7V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C7	-	R1111N471A	LVR-IC	LDO, Low noise, 4.7V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
C7	-	RT9169-40CB	LVR-IC	LDO, 4.0V±2%, 100mA, -CE	SOT-23-5	28cx	VR4	6g	Rct
C7	-	SN74LVC1G17QDCK	CMOS-Log	Schmitt-trigger	SC-70-5	28	Log11	6g	Ti
C7	-	TC4SU11F	CMOS-Log	2-input NAND gate	SSOP-5	28	Log1	6a	Tos
C7	ea	BL8555-17MQ	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C7	ea	BL8555-17MRA	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C7	ea	BL8555-17MRB	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C7	ea	LR8555-17MQ	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C7	ea	LR8555-17MRA	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C7	ea	LR8555-17MRB	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C7	ea	RN5VD27AA	Vdet-IC	2.7V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
C7	eu	BL8555-27MQ	LVR-IC	LDO, 2.7V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C7	eu	BL8555-27MRA	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C7	eu	BL8555-27MRB	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C7	eu	LR8555-27MQ	LVR-IC	LDO, 2.7V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C7	eu	LR8555-27MRA	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C7	eu	LR8555-27MRB	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C7	fg	BL8555-37MQ	LVR-IC	LDO, 3.7V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C7	fg	BL8555-37MRA	LVR-IC	LDO, 3.7V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C7	fg	BL8555-37MRB	LVR-IC	LDO, 3.7V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C7	fg	LR8555-37MQ	LVR-IC	LDO, 3.7V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C7	fg	LR8555-37MRA	LVR-IC	LDO, 3.7V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C7	fg	LR8555-37MRB	LVR-IC	LDO, 3.7V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C7	fh	BL8555-47MQ	LVR-IC	LDO, 4.7V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C7	fh	BL8555-47MRA	LVR-IC	LDO, 4.7V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C7	fh	BL8555-47MRB	LVR-IC	LDO, 4.7V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C7	fh	LR8555-47MQ	LVR-IC	LDO, 4.7V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C7	fh	LR8555-47MRA	LVR-IC	LDO, 4.7V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C7	fh	LR8555-47MRB	LVR-IC	LDO, 4.7V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C7	fk	BL8555-37CQ	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C7	fk	BL8555-37CRA	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C7	fk	BL8555-37CRB	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C7	fk	LR8555-37CQ	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C7	fk	LR8555-37CRA	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C7	fk	LR8555-37CRB	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C7	fm	BL8555-47CQ	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C7	fm	BL8555-47CRA	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C7	fm	BL8555-47CRB	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C7	fm	LR8555-47CQ	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C7	fm	LR8555-47CRA	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C7	fm	LR8555-47CRB	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C7	fp	BL8555-27CQ	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C7	fp	BL8555-27CRA	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C7	fp	BL8555-27CRB	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C7	fp	LR8555-27CQ	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C7	fp	LR8555-27CRA	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C7	fp	LR8555-27CRB	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C70	eh	XC6381C701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 155kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
C73	-	TC53C2702ECT	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
C79	-	74AHCT1G79GV	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT753	28	Log20	6a	Nxp
C7A	-	XC6108C27AMR	Vdet-IC	2.7V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C7B	-	XC6108C27BMR	Vdet-IC	2.7V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C7C	-	XC6108C27CMR	Vdet-IC	2.7V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C7D	-	XC6108C27DMR	Vdet-IC	2.7V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
c8	-	BD45E461G-M	Vdet-IC	4.6V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
C8	-	BL8555-18CQ	LVR-IC	LDO, 1.8V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C8	-	BL8555-18CRA	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C8	-	BL8555-18CRB	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C8	-	LR8555-18CQ	LVR-IC	LDO, 1.8V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C8	-	LR8555-18CRA	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C8	-	LR8555-18CRB	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C8	-	PI74STX1GT08CX	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6a	Per
C8	-	PI74STX1GT08TX	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6a	Per
C8	-	R1111N481A	LVR-IC	LDO, Low noise, 4.8V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
C8	-	RT9169-13CB	LVR-IC	LDO, 1.3V±2%, 100mA, -CE	SOT-23-5	28cx	VR4	6g	Rct

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C8	-	Si91842DT-18	LVR-IC	LDO, LN, 1.8V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
C8	-	TC1054-2.85VCT713	LVR-IC	LDO, 2.85V±2%, 50mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
C8	-	TC4S30F	CMOS-Log	2-input EXCLUSIVE OR gate	SSOP-5	28	Log5	6a	Tos
C8	ea	BL8555-18MQ	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C8	ea	BL8555-18MRA	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C8	ea	BL8555-18MRB	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C8	ea	LR8555-18MQ	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C8	ea	LR8555-18MRA	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C8	ea	LR8555-18MRB	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C8	ea	RN5VD28AA	Vdet-IC	2.8V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
C8	eu	BL8555-28MQ	LVR-IC	LDO, 2.8V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C8	eu	BL8555-28MRA	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C8	eu	BL8555-28MRB	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C8	eu	LR8555-28MQ	LVR-IC	LDO, 2.8V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C8	eu	LR8555-28MRA	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C8	eu	LR8555-28MRB	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C8	fg	BL8555-38MQ	LVR-IC	LDO, 3.8V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C8	fg	BL8555-38MRA	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C8	fg	BL8555-38MRB	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C8	fg	LR8555-38MQ	LVR-IC	LDO, 3.8V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C8	fg	LR8555-38MRA	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C8	fg	LR8555-38MRB	LVR-IC	LDO, 3.8V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C8	fh	BL8555-48MQ	LVR-IC	LDO, 4.8V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C8	fh	BL8555-48MRA	LVR-IC	LDO, 4.8V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C8	fh	BL8555-48MRB	LVR-IC	LDO, 4.8V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C8	fh	LR8555-48MQ	LVR-IC	LDO, 4.8V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C8	fh	LR8555-48MRA	LVR-IC	LDO, 4.8V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C8	fh	LR8555-48MRB	LVR-IC	LDO, 4.8V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C8	fk	BL8555-38CQ	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C8	fk	BL8555-38CRA	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C8	fk	BL8555-38CRB	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C8	fk	LR8555-38CQ	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C8	fk	LR8555-38CRA	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C8	fk	LR8555-38CRB	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C8	fm	BL8555-48CQ	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C8	fm	BL8555-48CRA	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C8	fm	BL8555-48CRB	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C8	fm	LR8555-48CQ	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C8	fm	LR8555-48CRA	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C8	fm	LR8555-48CRB	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C8	fp	BL8555-28CQ	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C8	fp	BL8555-28CRA	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C8	fp	BL8555-28CRB	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C8	fp	LR8555-28CQ	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C8	fp	LR8555-28CRA	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C8	fp	LR8555-28CRB	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C8-	-	RT9169-13PB	LVR-IC	LDO, 1.3V±2%, 100mA, -CE	SOT-23-5	28cx	VR4	6g	Rct
C83	-	TC53C2802ECT	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
C86	-	74AHCT1G86GV	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT753	28	Log5	6a	Nxp
C8A	-	XC6108C28AMR	Vdet-IC	2.8V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C8B	-	XC6108C28BMR	Vdet-IC	2.8V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C8C	-	XC6108C28CMR	Vdet-IC	2.8V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C8D	-	XC6108C28DMR	Vdet-IC	2.8V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
c9	-	BD45E471G-M	Vdet-IC	4.7V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
C9	-	BL8555-19CQ	LVR-IC	LDO, 1.9V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C9	-	BL8555-19CRA	LVR-IC	LDO, 1.9V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C9	-	BL8555-19CRB	LVR-IC	LDO, 1.9V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C9	-	LR8555-19CQ	LVR-IC	LDO, 1.9V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C9	-	LR8555-19CRA	LVR-IC	LDO, 1.9V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C9	-	LR8555-19CRB	LVR-IC	LDO, 1.9V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C9	-	R1111N491A	LVR-IC	LDO, Low noise, 4.9V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
C9	-	RT9169-15CB	LVR-IC	LDO, 1.5V±2%, 100mA, -CE	SOT-23-5	28cx	VR4	6g	Rct
C9	-	Si91842DT-20	LVR-IC	LDO, LN, 2.0V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
C9	-	TC1054-3.6VCT713	LVR-IC	LDO, 3.6V±2%, 50mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
C9	ea	BL8555-19MQ	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C9	ea	BL8555-19MRA	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C9	ea	BL8555-19MRB	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C9	ea	LR8555-19MQ	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C9	ea	LR8555-19MRA	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C9	ea	LR8555-19MRB	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C9	ea	RN5VD29AA	Vdet-IC	2.9V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
C9	eu	BL8555-29MQ	LVR-IC	LDO, 2.9V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C9	eu	BL8555-29MRA	LVR-IC	LDO, 2.9V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C9	eu	BL8555-29MRB	LVR-IC	LDO, 2.9V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C9	eu	LR8555-29MQ	LVR-IC	LDO, 2.9V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C9	eu	LR8555-29MRA	LVR-IC	LDO, 2.9V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C9	eu	LR8555-29MRB	LVR-IC	LDO, 2.9V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C9	fg	BL8555-39MQ	LVR-IC	LDO, 3.9V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C9	fg	BL8555-39MRA	LVR-IC	LDO, 3.9V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C9	fg	BL8555-39MRB	LVR-IC	LDO, 3.9V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C9	fg	LR8555-39MQ	LVR-IC	LDO, 3.9V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C9	fg	LR8555-39MRA	LVR-IC	LDO, 3.9V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C9	fg	LR8555-39MRB	LVR-IC	LDO, 3.9V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C9	fh	BL8555-49MQ	LVR-IC	LDO, 4.9V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Shb
C9	fh	BL8555-49MRA	LVR-IC	LDO, 4.9V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Shb
C9	fh	BL8555-49MRB	LVR-IC	LDO, 4.9V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Shb
C9	fh	LR8555-49MQ	LVR-IC	LDO, 4.9V±2%, 150mA	SC-70-5	28ym	VR1	6kd	Lrc
C9	fh	LR8555-49MRA	LVR-IC	LDO, 4.9V±2%, 150mA	SOT-23-5	28ym	VR1	6kd	Lrc
C9	fh	LR8555-49MRB	LVR-IC	LDO, 4.9V±2%, 150mA	SOT-23-5	28c5	VR1	6kc	Lrc
C9	fk	BL8555-39CQ	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C9	fk	BL8555-39CRA	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C9	fk	BL8555-39CRB	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C9	fk	LR8555-39CQ	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C9	fk	LR8555-39CRA	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C9	fk	LR8555-39CRB	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C9	fm	BL8555-49CQ	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C9	fm	BL8555-49CRA	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C9	fm	BL8555-49CRB	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C9	fm	LR8555-49CQ	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C9	fm	LR8555-49CRA	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C9	fm	LR8555-49CRB	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C9	fp	BL8555-29CQ	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
C9	fp	BL8555-29CRA	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
C9	fp	BL8555-29CRB	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
C9	fp	LR8555-29CQ	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
C9	fp	LR8555-29CRA	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
C9	fp	LR8555-29CRB	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
C9-	-	RT9169-15PB	LVR-IC	LDO, 1.5V±2%, 100mA, -CE	SOT-23-5	28cx	VR4	6g	Rct
C93	-	TC53C2902ECT	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
C9A	-	XC6108C29AMR	Vdet-IC	2.9V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C9B	-	XC6108C29BMR	Vdet-IC	2.9V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
C9C	-	XC6108C29CMR	Vdet-IC	2.9V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
C9D	-	XC6108C29DMR	Vdet-IC	2.9V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
Ca	-	BD48E51G	Vdet-IC	5.1V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
CA	-	μPA503T	p-MOSFET	Dual, 50V, 100mA, 300mW, <60 Ω(10mA), 45/25ns	SOT-23-5	28fb	T20	6a	Nec
CA	-	74AHCT1G00GW	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6a	Nxp
CA	-	PI74STX1GT125CX	CMOS-Log	Bus buffer gate with 3-state output	SC-70-5	28	Log14	6a	Per
CA	-	PI74STX1GT125TX	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log14	6a	Per
CA	-	PT7M7825STA	Vdet-IC	2.93V±1.5%, ±Reset PPO, -MR	SOT-23-5	28xf	VD21	6k	Pti
CA	-	RN5RT40AA	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
CA	-	TC7S584F	CMOS-Log	Inverting Schmitt-trigger	SSOP-5	28	Log7	6a	Tos
CA	-	V6301ASP5B	Vdet-IC	2.0V±2%, -Reset PPO, 290ms	SOT-23-5	28vdr	VD7	6g	Em
CA	ea	PT7M7825STAE	Vdet-IC	2.93V±1.5%, ±Reset PPO, -MR, Lead free	SOT-23-5	28xf	VD21	6k	Pti
CA0	ej	XC6116A031MR	Vdet-IC	3.1V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CA1	ej	XC6116A032MR	Vdet-IC	3.2V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CA2	ej	XC6116A033MR	Vdet-IC	3.3V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CA3	ej	XC6116A034MR	Vdet-IC	3.4V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CA4	ej	XC6116A035MR	Vdet-IC	3.5V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CA5	ej	XC6116A036MR	Vdet-IC	3.6V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CA6	ej	XC6116A037MR	Vdet-IC	3.7V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CA7	ej	XC6116A038MR	Vdet-IC	3.8V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CA8	-	XC9235B08CMR-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CA8	ej	XC6116A039MR	Vdet-IC	3.9V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CA9	-	XC9235B09CMR-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CA9	ej	XC6116A040MR	Vdet-IC	4.0V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAA	-	RP106N071B	LVR-IC	LDO, 0.7V±0.8%, 400mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
CAA	ej	XC6116A041MR	Vdet-IC	4.1V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAB	-	RP106N081B	LVR-IC	LDO, 0.8V±0.8%, 400mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
CAB	ej	XC6116A042MR	Vdet-IC	4.2V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAC	-	RP106N091B	LVR-IC	LDO, 0.9V±0.8%, 400mA, +CE	SOT-23-5	28cx	VR4	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CAC	ej	XC6116A043MR	Vdet-IC	4.3V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAD	-	RP106N101B	LVR-IC	LDO, 1.0V±0.8%, 400mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
CAD	ej	XC6116A044MR	Vdet-IC	4.4V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAE	-	RP106N111B	LVR-IC	LDO, 1.1V±0.8%, 400mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
CAE	ej	XC6116A045MR	Vdet-IC	4.5V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAF	-	RP106N121B	LVR-IC	LDO, 1.2V±0.8%, 400mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
CAF	ec	XC6116A016MR	Vdet-IC	1.6V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAF	ej	XC6116A046MR	Vdet-IC	4.6V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAG	-	RP106N131B	LVR-IC	LDO, 1.3V±0.8%, 400mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
CAH	-	RP106N141B	LVR-IC	LDO, 1.4V±0.8%, 400mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
CAH	ec	XC6116A017MR	Vdet-IC	1.7V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAH	ej	XC6116A047MR	Vdet-IC	4.7V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAJ	-	RP106N151B	LVR-IC	LDO, 1.5V±0.8%, 400mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
CAK	-	RP106N161B	LVR-IC	LDO, 1.6V±0.8%, 400mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
CAK	ec	XC6116A018MR	Vdet-IC	1.8V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAK	ej	XC6116A048MR	Vdet-IC	4.8V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAL	-	RP106N171B	LVR-IC	LDO, 1.7V±0.8%, 400mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
CAL	-	XC9235B0LCMR-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CAL	ec	XC6116A019MR	Vdet-IC	1.9V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAL	ej	XC6116A049MR	Vdet-IC	4.9V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAM	-	RP106N181B	LVR-IC	LDO, 1.8V±0.8%, 400mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
CAM	-	XC9235B0MCMR-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CAM	ec	XC6116A020MR	Vdet-IC	2.0V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAM	ej	XC6116A050MR	Vdet-IC	5.0V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAN	-	RP106N101B5	LVR-IC	LDO, 1.05V±0.8%, 400mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
CAN	ec	XC6116A021MR	Vdet-IC	2.1V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAP	-	RP106N121B5	LVR-IC	LDO, 1.25V±0.8%, 400mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
CAP	ec	XC6116A022MR	Vdet-IC	2.2V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAQ	-	RP106N181B5	LVR-IC	LDO, 1.85V±0.8%, 400mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
CAR	-	NCV303LSN31T1	Vdet-IC	3.1V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
CAR	-	RP106N111B5	LVR-IC	LDO, 1.15V±0.8%, 400mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
CAR	ec	XC6116A023MR	Vdet-IC	2.3V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAS	ec	XC6116A024MR	Vdet-IC	2.4V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAT	-	NCV303LSN34T1	Vdet-IC	3.4V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
CAT	ec	XC6116A025MR	Vdet-IC	2.5V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAU	ec	XC6116A026MR	Vdet-IC	2.6V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAV	ec	XC6116A027MR	Vdet-IC	2.7V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAX	ec	XC6116A028MR	Vdet-IC	2.8V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAY	ec	XC6116A029MR	Vdet-IC	2.9V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
CAZ	ec	XC6116A030MR	Vdet-IC	3.0V±2%, -MR, ±Reset PPO, Rt=3.13ms	SOT-25	28xf	VD21	6g	Tor
Cb	-	BD48E52G	Vdet-IC	5.2V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
CB	-	μPA573T	p-MOSFET	Dual, 30V, ±100mA, 200mW, <25 Ω(10mA), 10/130ns	SOT-23-5	28fb	T20	6a	Nec
CB	-	74AHCT1G02GW	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6a	Nxp
CB	-	PI74STX1GT126CX	CMOS-Log	Bus buffer gate with 3-state output	SC-70-5	28	Log13	6a	Per
CB	-	PI74STX1GT126TX	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log13	6a	Per
CB	-	PT7M7825RTA	Vdet-IC	2.63V±1.5%, ±Reset PPO, -MR	SOT-23-5	28xf	VD21	6k	Pti
CB	-	RN5RT41AA	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
CB	-	RT9167A-50CB	LVR-IC	LDO, 5.0V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
CB	-	V6301BSP5B	Vdet-IC	2.4V±2%, -Reset PPO, 290ms	SOT-23-5	28vdr	VD7	6g	Em
CB	ea	PT7M7825RTAE	Vdet-IC	2.63V±1.5%, ±Reset PPO, -MR, Lead free	SOT-23-5	28xf	VD21	6k	Pti
CB-	-	RT9013A-18PU5	LVR-IC	LDO, 1.8V±2%, 120mA, +CE	SC-70-5	28cx	VR4	6g	Rct
CB-	-	RT9167A-50PB	LVR-IC	LDO, 5.0V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
CB-	-	XC62GR2112M	LVR-IC	2.1V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
CB-	eh	XC62GP2112M	LVR-IC	2.1V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
CB+	-	XC62GR2122M	LVR-IC	2.1V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
CB+	eh	XC62GP2122M	LVR-IC	2.1V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
CB0	-	XC6213B312MR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CB0	-	XC9235B10CMR-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CB0	ej	XC6116B031MR	Vdet-IC	3.1V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CB1	-	XC6213B322MR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CB1	-	XC9235B11CMR-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CB1	ej	XC6116B032MR	Vdet-IC	3.2V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CB2	-	XC6213B332MR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CB2	-	XC9235B12CMR-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CB2	ej	XC6116B033MR	Vdet-IC	3.3V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CB3	-	XC6213B342MR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CB3	-	XC9235B13CMR-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CB3	ej	XC6116B034MR	Vdet-IC	3.4V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CB4	-	XC6213B352MR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CB4	-	XC9235B14CMR-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CB4	ej	XC6116B035MR	Vdet-IC	3.5V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CB5	-	XC6213B362MR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CB5	-	XC9235B15CMR-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CB5	eb	XC6367C151MR	DC-DC-IC	PWM step-up, 1.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CB5	ej	XC6116B036MR	Vdet-IC	3.6V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CB5	ek	XC6365C151MR	DC-DC-IC	PWM st-down, 100kHz, 1.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CB6	-	XC6213B372MR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CB6	-	XC9235B16CMR-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CB6	eb	XC6367C161MR	DC-DC-IC	PWM step-up, 1.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CB6	ej	XC6116B037MR	Vdet-IC	3.7V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CB6	ek	XC6365C161MR	DC-DC-IC	PWM st-down, 100kHz, 1.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CB7	-	XC6213B382MR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CB7	-	XC9235B17CMR-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CB7	eb	XC6367C171MR	DC-DC-IC	PWM step-up, 1.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CB7	ej	XC6116B038MR	Vdet-IC	3.8V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CB7	ek	XC6365C171MR	DC-DC-IC	PWM st-down, 100kHz, 1.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CB8	-	XC6213B392MR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CB8	-	XC9235B18CMR-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CB8	eb	XC6367C181MR	DC-DC-IC	PWM step-up, 1.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CB8	ej	XC6116B039MR	Vdet-IC	3.9V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CB8	ek	XC6365C181MR	DC-DC-IC	PWM st-down, 100kHz, 1.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CB9	-	XC6213B402MR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CB9	-	XC9235B19CMR-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CB9	eb	XC6367C191MR	DC-DC-IC	PWM step-up, 1.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CB9	ej	XC6116B040MR	Vdet-IC	4.0V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CB9	ek	XC6365C191MR	DC-DC-IC	PWM st-down, 100kHz, 1.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CBA	-	RP106N071D	LVR-IC	LDO, 0.7V±0.8%, 400mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
CBA	-	XC6213B412MR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CBA	-	XC9235B1ACMR-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CBA	ej	XC6116B041MR	Vdet-IC	4.1V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBB	-	RP106N081D	LVR-IC	LDO, 0.8V±0.8%, 400mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
CBB	-	XC6213B422MR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CBB	-	XC9235B1BCMR-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CBB	ej	XC6116B042MR	Vdet-IC	4.2V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBC	-	RP106N091D	LVR-IC	LDO, 0.9V±0.8%, 400mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
CBC	-	XC6213B432MR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CBC	-	XC9235B1CCMR-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CBC	ej	XC6116B043MR	Vdet-IC	4.3V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBD	-	RP106N101D	LVR-IC	LDO, 1.0V±0.8%, 400mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
CBD	-	XC6213B442MR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CBD	-	XC9235B1DCMR-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CBD	ej	XC6116B044MR	Vdet-IC	4.4V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBE	-	RP106N111D	LVR-IC	LDO, 1.1V±0.8%, 400mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
CBE	-	XC6213B452MR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CBE	-	XC9235B1ECMR-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CBE	ej	XC6116B045MR	Vdet-IC	4.5V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBF	-	RP106N121D	LVR-IC	LDO, 1.2V±0.8%, 400mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
CBF	-	XC6213B462MR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CBF	-	XC9235B1FCMR-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CBF	eb	XC6367C155MR	DC-DC-IC	PWM step-up, 1.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CBF	ec	XC6116B016MR	Vdet-IC	1.6V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBF	ej	XC6116B046MR	Vdet-IC	4.6V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBF	ek	XC6365C155MR	DC-DC-IC	PWM st-down, 500kHz, 1.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CBG	-	RP106N131D	LVR-IC	LDO, 1.3V±0.8%, 400mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
CBH	-	RP106N141D	LVR-IC	LDO, 1.4V±0.8%, 400mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
CBH	-	XC6213B472MR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CBH	-	XC9235B1HCMR-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CBH	eb	XC6367C165MR	DC-DC-IC	PWM step-up, 1.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CBH	ec	XC6116B017MR	Vdet-IC	1.7V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBH	ej	XC6116B047MR	Vdet-IC	4.7V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBH	ek	XC6365C165MR	DC-DC-IC	PWM st-down, 500kHz, 1.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CBJ	-	RP106N151D	LVR-IC	LDO, 1.5V±0.8%, 400mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
CBK	-	RP106N161D	LVR-IC	LDO, 1.6V±0.8%, 400mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
CBK	-	XC6213B482MR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CBK	-	XC9235B1KCMR-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CBK	eb	XC6367C175MR	DC-DC-IC	PWM step-up, 1.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CBK	ec	XC6116B018MR	Vdet-IC	1.8V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBK	ej	XC6116B048MR	Vdet-IC	4.8V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBK	ek	XC6365C175MR	DC-DC-IC	PWM st-down, 500kHz, 1.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CBL	-	RP106N171D	LVR-IC	LDO, 1.7V±0.8%, 400mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CBL	-	XC6213B492MR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CBL	-	XC9235B1LCMR-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CBL	eb	XC6367C185MR	DC-DC-IC	PWM step-up, 1.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CBL	ec	XC6116B019MR	Vdet-IC	1.9V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBL	ej	XC6116B049MR	Vdet-IC	4.9V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBL	ek	XC6365C185MR	DC-DC-IC	PWM st-down, 500kHz, 1.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CBM	-	RP106N181D	LVR-IC	LDO, 1.8V±0.8%, 400mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
CBM	-	XC6213B502MR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CBM	-	XC9235B1MCMR-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CBM	eb	XC6367C195MR	DC-DC-IC	PWM step-up, 1.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CBM	ec	XC6116B020MR	Vdet-IC	2.0V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBM	ej	XC6116B050MR	Vdet-IC	5.0V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBM	ek	XC6365C195MR	DC-DC-IC	PWM st-down, 500kHz, 1.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CBN	-	RP106N101D5	LVR-IC	LDO, 1.05V±0.8%, 400mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
CBN	ec	XC6116B021MR	Vdet-IC	2.1V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBP	-	RP106N121D5	LVR-IC	LDO, 1.25V±0.8%, 400mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
CBP	ec	XC6116B022MR	Vdet-IC	2.2V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBQ	-	RP106N181D5	LVR-IC	LDO, 1.85V±0.8%, 400mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
CBR	-	RP106N111D5	LVR-IC	LDO, 1.15V±0.8%, 400mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
CBR	ec	XC6116B023MR	Vdet-IC	2.3V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBS	ec	XC6116B024MR	Vdet-IC	2.4V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBT	ec	XC6116B025MR	Vdet-IC	2.5V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBU	ec	XC6116B026MR	Vdet-IC	2.6V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBV	ec	XC6116B027MR	Vdet-IC	2.7V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBX	ec	XC6116B028MR	Vdet-IC	2.8V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBY	ec	XC6116B029MR	Vdet-IC	2.9V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CBZ	ec	XC6116B030MR	Vdet-IC	3.0V±2%, -MR, ±Reset PPO, Rt=25ms	SOT-25	28xf	VD21	6g	Tor
CC	-	74AHCT1G04GW	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Nxp
CC	-	PT7M7825ZTA	Vdet-IC	2.32V±1.5%, ±Reset PPO, -MR	SOT-23-5	28xf	VD21	6k	Pti
CC	-	RN5RT42AA	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
CC	-	SN74LVC2G04DCK	CMOS-Log	Dual inverters	SC-70-5	28	Log24	6g	Ti
CC	-	V6301CSP5B	Vdet-IC	2.8V±2%, -Reset PPO, 290ms	SOT-23-5	28vdr	VD7	6g	Em
CC	ea	PT7M7825ZTAE	Vdet-IC	2.32V±1.5%, ±Reset PPO, -MR, Lead free	SOT-23-5	28xf	VD21	6k	Pti
CC-	-	XC62GR2212M	LVR-IC	2.2V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
CC-	eh	XC62GP2212M	LVR-IC	2.2V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
CC+	-	XC62GR2222M	LVR-IC	2.2V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
CC+	eh	XC62GP2222M	LVR-IC	2.2V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
CC=	-	RT9013A-26GU5	LVR-IC	LDO, 2.6V±2%, 120mA, +CE	SC-70-5	28cx	VR4	6g	Rct
CC0	-	XC9235B20CMR-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CC0	eb	XC6367C201MR	DC-DC-IC	PWM step-up, 2.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CC0	ej	XC6116C031MR	Vdet-IC	3.1V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CC0	ek	XC6365C201MR	DC-DC-IC	PWM st-down, 100kHz, 2.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CC1	-	XC9235B21CMR-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CC1	eb	XC6367C211MR	DC-DC-IC	PWM step-up, 2.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CC1	ej	XC6116C032MR	Vdet-IC	3.2V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CC1	ek	XC6365C211MR	DC-DC-IC	PWM st-down, 100kHz, 2.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CC2	-	XC9235B22CMR-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CC2	eb	XC6367C221MR	DC-DC-IC	PWM step-up, 2.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CC2	ej	XC6116C033MR	Vdet-IC	3.3V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CC2	ek	XC6365C221MR	DC-DC-IC	PWM st-down, 100kHz, 2.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CC3	-	XC9235B23CMR-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CC3	eb	XC6367C231MR	DC-DC-IC	PWM step-up, 2.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CC3	ej	XC6116C034MR	Vdet-IC	3.4V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CC3	ek	XC6365C231MR	DC-DC-IC	PWM st-down, 100kHz, 2.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CC4	-	XC9235B24CMR-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CC4	eb	XC6367C241MR	DC-DC-IC	PWM step-up, 2.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CC4	ej	XC6116C035MR	Vdet-IC	3.5V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CC4	ek	XC6365C241MR	DC-DC-IC	PWM st-down, 100kHz, 2.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CC5	-	XC9235B25CMR-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CC5	eb	XC6367C251MR	DC-DC-IC	PWM step-up, 2.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CC5	ej	XC6116C036MR	Vdet-IC	3.6V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CC5	ek	XC6365C251MR	DC-DC-IC	PWM st-down, 100kHz, 2.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CC6	-	XC9235B26CMR-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CC6	eb	XC6367C261MR	DC-DC-IC	PWM step-up, 2.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CC6	ej	XC6116C037MR	Vdet-IC	3.7V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CC6	ek	XC6365C261MR	DC-DC-IC	PWM st-down, 100kHz, 2.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CC7	-	XC9235B27CMR-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CC7	eb	XC6367C271MR	DC-DC-IC	PWM step-up, 2.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CC7	ej	XC6116C038MR	Vdet-IC	3.8V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CC7	ek	XC6365C271MR	DC-DC-IC	PWM st-down, 100kHz, 2.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CC8	-	XC9235B28CMR-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CC8	eb	XC6367C281MR	DC-DC-IC	PWM step-up, 2.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CC8	ej	XC6116C039MR	Vdet-IC	3.9V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CC8	ek	XC6365C281MR	DC-DC-IC	PWM st-down, 100kHz, 2.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CC9	-	XC9235B29CMR-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CC9	eb	XC6367C291MR	DC-DC-IC	PWM step-up, 2.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CC9	ej	XC6116C040MR	Vdet-IC	4.0V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CC9	ek	XC6365C291MR	DC-DC-IC	PWM st-down, 100kHz, 2.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CCA	-	XC9235B2ACMR-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CCA	eb	XC6367C205MR	DC-DC-IC	PWM step-up, 2.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CCA	ej	XC6116C041MR	Vdet-IC	4.1V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCA	ek	XC6365C205MR	DC-DC-IC	PWM st-down, 500kHz, 2.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CCB	-	XC9235B2BCMR-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CCB	eb	XC6367C215MR	DC-DC-IC	PWM step-up, 2.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CCB	ej	XC6116C042MR	Vdet-IC	4.2V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCB	ek	XC6365C215MR	DC-DC-IC	PWM st-down, 500kHz, 2.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CCC	-	XC9235B2CCMR-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CCC	eb	XC6367C225MR	DC-DC-IC	PWM step-up, 2.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CCC	ej	XC6116C043MR	Vdet-IC	4.3V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCC	ek	XC6365C225MR	DC-DC-IC	PWM st-down, 500kHz, 2.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CCD	-	XC9235B2DCMR-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CCD	eb	XC6367C235MR	DC-DC-IC	PWM step-up, 2.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CCD	ej	XC6116C044MR	Vdet-IC	4.4V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCD	ek	XC6365C235MR	DC-DC-IC	PWM st-down, 500kHz, 2.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CCE	-	XC9235B2ECMR-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CCE	eb	XC6367C245MR	DC-DC-IC	PWM step-up, 2.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CCE	ej	XC6116C045MR	Vdet-IC	4.5V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCE	ek	XC6365C245MR	DC-DC-IC	PWM st-down, 500kHz, 2.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CCF	-	XC9235B2FCMR-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CCF	eb	XC6367C255MR	DC-DC-IC	PWM step-up, 2.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CCF	ec	XC6116C016MR	Vdet-IC	1.6V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCF	ej	XC6116C046MR	Vdet-IC	4.6V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCF	ek	XC6365C255MR	DC-DC-IC	PWM st-down, 500kHz, 2.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CCH	-	XC9235B2HCMR-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CCH	eb	XC6367C265MR	DC-DC-IC	PWM step-up, 2.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CCH	ec	XC6116C017MR	Vdet-IC	1.7V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCH	ej	XC6116C047MR	Vdet-IC	4.7V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCH	ek	XC6365C265MR	DC-DC-IC	PWM st-down, 500kHz, 2.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CCK	-	XC9235B2KCMR-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CCK	eb	XC6367C275MR	DC-DC-IC	PWM step-up, 2.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CCK	ec	XC6116C018MR	Vdet-IC	1.8V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCK	ej	XC6116C048MR	Vdet-IC	4.8V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCK	ek	XC6365C275MR	DC-DC-IC	PWM st-down, 500kHz, 2.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CCL	-	XC9235B2LCMR-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CCL	eb	XC6367C285MR	DC-DC-IC	PWM step-up, 2.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CCL	ec	XC6116C019MR	Vdet-IC	1.9V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCL	ej	XC6116C049MR	Vdet-IC	4.9V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCL	ek	XC6365C285MR	DC-DC-IC	PWM st-down, 500kHz, 2.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CCM	-	XC9235B2MCMR-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CCM	eb	XC6367C295MR	DC-DC-IC	PWM step-up, 2.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CCM	ec	XC6116C020MR	Vdet-IC	2.0V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCM	ej	XC6116C050MR	Vdet-IC	5.0V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCM	ek	XC6365C295MR	DC-DC-IC	PWM st-down, 500kHz, 2.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CCN	ec	XC6116C021MR	Vdet-IC	2.1V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCP	ec	XC6116C022MR	Vdet-IC	2.2V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCR	ec	XC6116C023MR	Vdet-IC	2.3V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCS	ec	XC6116C024MR	Vdet-IC	2.4V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCT	ec	XC6116C025MR	Vdet-IC	2.5V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCU	ec	XC6116C026MR	Vdet-IC	2.6V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCV	ec	XC6116C027MR	Vdet-IC	2.7V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCX	ec	XC6116C028MR	Vdet-IC	2.8V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCY	ec	XC6116C029MR	Vdet-IC	2.9V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
CCZ	ec	XC6116C030MR	Vdet-IC	3.0V±2%, -MR, ±Reset PPO, Rt=50ms	SOT-25	28xf	VD21	6g	Tor
Cd	-	BD48E54G	Vdet-IC	5.4V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
CD	-	BH25FB1WG	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
CD	-	BH25FB1WHFV	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
CD	-	PI74STX1GT32CX	CMOS-Log	2-input OR gate	SC-70-5	28	Log4	6a	Per
CD	-	PI74STX1GT32TX	CMOS-Log	2-input OR gate	SOT-23-5	28	Log4	6a	Per
CD	-	PT7M7825YTA	Vdet-IC	2.20V±1.5%, ±Reset PPO, -MR	SOT-23-5	28xf	VD21	6k	Pti
CD	-	RN5RT43AA	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CD	-	V6301DSP5B	Vdet-IC	3.5V±2%, -Reset PPO, 290ms	SOT-23-5	28vdr	VD7	6g	Em
CD	ea	PT7M7825YTAE	Vdet-IC	2.20V±1.5%, ±Reset PPO, -MR, Lead free	SOT-23-5	28xf	VD21	6k	Pti
CD-	-	XC62GR2312M	LVR-IC	2.3V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
CD-	eh	XC62GP2312M	LVR-IC	2.3V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
CD+	-	XC62GR2322M	LVR-IC	2.3V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
CD+	eh	XC62GP2322M	LVR-IC	2.3V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
CD=	-	RT9013-1BGU5	LVR-IC	LDO, 1.25V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6g	Rct
CD0	-	XC9235B30CMR-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CD0	eb	XC6367C301MR	DC-DC-IC	PWM step-up, 3.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CD0	ej	XC6116D031MR	Vdet-IC	3.1V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CD0	ek	XC6365C301MR	DC-DC-IC	PWM st-down, 100kHz, 3.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CD1	-	XC9235B31CMR-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CD1	eb	XC6367C311MR	DC-DC-IC	PWM step-up, 3.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CD1	ej	XC6116D032MR	Vdet-IC	3.2V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CD1	ek	XC6365C311MR	DC-DC-IC	PWM st-down, 100kHz, 3.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CD2	-	XC9235B32CMR-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CD2	eb	XC6367C321MR	DC-DC-IC	PWM step-up, 3.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CD2	ej	XC6116D033MR	Vdet-IC	3.3V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CD2	ek	XC6365C321MR	DC-DC-IC	PWM st-down, 100kHz, 3.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CD3	-	XC9235B33CMR-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CD3	eb	XC6367C331MR	DC-DC-IC	PWM step-up, 3.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CD3	ej	XC6116D034MR	Vdet-IC	3.4V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CD3	ek	XC6365C331MR	DC-DC-IC	PWM st-down, 100kHz, 3.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CD4	-	XC9235B34CMR-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CD4	eb	XC6367C341MR	DC-DC-IC	PWM step-up, 3.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CD4	ej	XC6116D035MR	Vdet-IC	3.5V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CD4	ek	XC6365C341MR	DC-DC-IC	PWM st-down, 100kHz, 3.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CD5	-	XC9235B35CMR-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CD5	eb	XC6367C351MR	DC-DC-IC	PWM step-up, 3.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CD5	ej	XC6116D036MR	Vdet-IC	3.6V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CD5	ek	XC6365C351MR	DC-DC-IC	PWM st-down, 100kHz, 3.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CD6	-	XC9235B36CMR-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CD6	eb	XC6367C361MR	DC-DC-IC	PWM step-up, 3.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CD6	ej	XC6116D037MR	Vdet-IC	3.7V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CD6	ek	XC6365C361MR	DC-DC-IC	PWM st-down, 100kHz, 3.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CD7	-	XC9235B37CMR-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CD7	eb	XC6367C371MR	DC-DC-IC	PWM step-up, 3.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CD7	ej	XC6116D038MR	Vdet-IC	3.8V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CD7	ek	XC6365C371MR	DC-DC-IC	PWM st-down, 100kHz, 3.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CD8	-	XC9235B38CMR-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CD8	eb	XC6367C381MR	DC-DC-IC	PWM step-up, 3.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CD8	ej	XC6116D039MR	Vdet-IC	3.9V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CD8	ek	XC6365C381MR	DC-DC-IC	PWM st-down, 100kHz, 3.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CD9	-	XC9235B39CMR-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CD9	eb	XC6367C391MR	DC-DC-IC	PWM step-up, 3.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CD9	ej	XC6116D040MR	Vdet-IC	4.0V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CD9	ek	XC6365C391MR	DC-DC-IC	PWM st-down, 100kHz, 3.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CDA	-	XC9235B3ACMR-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CDA	eb	XC6367C305MR	DC-DC-IC	PWM step-up, 3.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CDA	ej	XC6116D041MR	Vdet-IC	4.1V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDA	ek	XC6365C305MR	DC-DC-IC	PWM st-down, 500kHz, 3.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CDB	-	XC9235B3BCMR-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CDB	eb	XC6367C315MR	DC-DC-IC	PWM step-up, 3.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CDB	ej	XC6116D042MR	Vdet-IC	4.2V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDB	ek	XC6365C315MR	DC-DC-IC	PWM st-down, 500kHz, 3.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CDC	-	XC9235B3CCMR-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CDC	eb	XC6367C325MR	DC-DC-IC	PWM step-up, 3.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CDC	ej	XC6116D043MR	Vdet-IC	4.3V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDC	ek	XC6365C325MR	DC-DC-IC	PWM st-down, 500kHz, 3.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CDD	-	XC9235B3DCMR-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CDD	eb	XC6367C335MR	DC-DC-IC	PWM step-up, 3.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CDD	ej	XC6116D044MR	Vdet-IC	4.4V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDD	ek	XC6365C335MR	DC-DC-IC	PWM st-down, 500kHz, 3.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CDE	-	XC9235B3ECMR-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CDE	eb	XC6367C345MR	DC-DC-IC	PWM step-up, 3.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CDE	ej	XC6116D045MR	Vdet-IC	4.5V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDE	ek	XC6365C345MR	DC-DC-IC	PWM st-down, 500kHz, 3.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CDF	-	XC9235B3FCMR-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CDF	eb	XC6367C355MR	DC-DC-IC	PWM step-up, 3.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CDF	ec	XC6116D016MR	Vdet-IC	1.6V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CDF	ej	XC6116D046MR	Vdet-IC	4.6V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDF	ek	XC6365C355MR	DC-DC-IC	PWM st-down, 500kHz, 3.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CDH	-	XC9235B3HCMR-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CDH	eb	XC6367C365MR	DC-DC-IC	PWM step-up, 3.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CDH	ec	XC6116D017MR	Vdet-IC	1.7V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDH	ej	XC6116D047MR	Vdet-IC	4.7V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDH	ek	XC6365C365MR	DC-DC-IC	PWM st-down, 500kHz, 3.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CDK	-	XC9235B3KCMR-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CDK	eb	XC6367C375MR	DC-DC-IC	PWM step-up, 3.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CDK	ec	XC6116D018MR	Vdet-IC	1.8V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDK	ej	XC6116D048MR	Vdet-IC	4.8V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDK	ek	XC6365C375MR	DC-DC-IC	PWM st-down, 500kHz, 3.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CDL	-	XC9235B3LCMR-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CDL	eb	XC6367C385MR	DC-DC-IC	PWM step-up, 3.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CDL	ec	XC6116D019MR	Vdet-IC	1.9V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDL	ej	XC6116D049MR	Vdet-IC	4.9V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDL	ek	XC6365C385MR	DC-DC-IC	PWM st-down, 500kHz, 3.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CDM	-	XC9235B3MCMR-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CDM	eb	XC6367C395MR	DC-DC-IC	PWM step-up, 3.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CDM	ec	XC6116D020MR	Vdet-IC	2.0V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDM	ej	XC6116D050MR	Vdet-IC	5.0V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDM	ek	XC6365C395MR	DC-DC-IC	PWM st-down, 500kHz, 3.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CDN	ec	XC6116D021MR	Vdet-IC	2.1V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDP	ec	XC6116D022MR	Vdet-IC	2.2V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDR	ec	XC6116D023MR	Vdet-IC	2.3V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDS	ec	XC6116D024MR	Vdet-IC	2.4V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDT	ec	XC6116D025MR	Vdet-IC	2.5V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDU	ec	XC6116D026MR	Vdet-IC	2.6V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDV	ec	XC6116D027MR	Vdet-IC	2.7V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDX	ec	XC6116D028MR	Vdet-IC	2.8V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDY	ec	XC6116D029MR	Vdet-IC	2.9V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
CDZ	ec	XC6116D030MR	Vdet-IC	3.0V±2%, -MR, ±Reset PPO, Rt=100ms	SOT-25	28xf	VD21	6g	Tor
Ce	-	BD48E55G	Vdet-IC	5.5V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
CE	-	74AHCT1G08GW	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Nxp
CE	-	BH28FB1WG	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
CE	-	BH28FB1WHFV	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
CE	-	RN5RT44AA	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
CE	-	RT9169-33CB	LVR-IC	LDO, 3.3V±2%, 100mA, -CE	SOT-23-5	28cx	VR4	6g	Rct
CE	-	V6301ESP5B	Vdet-IC	4V±2%, -Reset PPO, 290ms	SOT-23-5	28vdr	VD7	6g	Em
CE-	-	XC62GR2412M	LVR-IC	2.4V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
CE-	eh	XC62GP2412M	LVR-IC	2.4V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
CE+	-	XC62GR2422M	LVR-IC	2.4V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
CE+	eh	XC62GP2422M	LVR-IC	2.4V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
CE0	-	XC9235B40CMR-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CE0	eb	XC6367C401MR	DC-DC-IC	PWM step-up, 4.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CE0	ej	XC6116E031MR	Vdet-IC	3.1V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CE0	ek	XC6365C401MR	DC-DC-IC	PWM st-down, 100kHz, 4.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CE1	eb	XC6367C411MR	DC-DC-IC	PWM step-up, 4.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CE1	ej	XC6116E032MR	Vdet-IC	3.2V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CE1	ek	XC6365C411MR	DC-DC-IC	PWM st-down, 100kHz, 4.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CE2	eb	XC6367C421MR	DC-DC-IC	PWM step-up, 4.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CE2	ej	XC6116E033MR	Vdet-IC	3.3V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CE2	ek	XC6365C421MR	DC-DC-IC	PWM st-down, 100kHz, 4.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CE3	eb	XC6367C431MR	DC-DC-IC	PWM step-up, 4.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CE3	ej	XC6116E034MR	Vdet-IC	3.4V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CE3	ek	XC6365C431MR	DC-DC-IC	PWM st-down, 100kHz, 4.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CE4	eb	XC6367C441MR	DC-DC-IC	PWM step-up, 4.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CE4	ej	XC6116E035MR	Vdet-IC	3.5V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CE4	ek	XC6365C441MR	DC-DC-IC	PWM st-down, 100kHz, 4.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CE5	eb	XC6367C451MR	DC-DC-IC	PWM step-up, 4.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CE5	ej	XC6116E036MR	Vdet-IC	3.6V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CE5	ek	XC6365C451MR	DC-DC-IC	PWM st-down, 100kHz, 4.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CE6	eb	XC6367C461MR	DC-DC-IC	PWM step-up, 4.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CE6	ej	XC6116E037MR	Vdet-IC	3.7V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CE6	ek	XC6365C461MR	DC-DC-IC	PWM st-down, 100kHz, 4.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CE7	eb	XC6367C471MR	DC-DC-IC	PWM step-up, 4.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CE7	ej	XC6116E038MR	Vdet-IC	3.8V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CE7	ek	XC6365C471MR	DC-DC-IC	PWM st-down, 100kHz, 4.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CE8	eb	XC6367C481MR	DC-DC-IC	PWM step-up, 4.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CE8	ej	XC6116E039MR	Vdet-IC	3.9V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CE8	ek	XC6365C481MR	DC-DC-IC	PWM st-down, 100kHz, 4.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CE9	eb	XC6367C491MR	DC-DC-IC	PWM step-up, 4.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CE9	ej	XC6116E040MR	Vdet-IC	4.0V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CE9	ek	XC6365C491MR	DC-DC-IC	PWM st-down, 100kHz, 4.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CEA	eb	XC6367C405MR	DC-DC-IC	PWM step-up, 4.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CEA	ej	XC6116E041MR	Vdet-IC	4.1V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEA	ek	XC6365C405MR	DC-DC-IC	PWM st-down, 500kHz, 4.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CEB	eb	XC6367C415MR	DC-DC-IC	PWM step-up, 4.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CEB	ej	XC6116E042MR	Vdet-IC	4.2V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEB	ek	XC6365C415MR	DC-DC-IC	PWM st-down, 500kHz, 4.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CEC	eb	XC6367C425MR	DC-DC-IC	PWM step-up, 4.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CEC	ej	XC6116E043MR	Vdet-IC	4.3V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEC	ek	XC6365C425MR	DC-DC-IC	PWM st-down, 500kHz, 4.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CED	eb	XC6367C435MR	DC-DC-IC	PWM step-up, 4.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CED	ej	XC6116E044MR	Vdet-IC	4.4V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CED	ek	XC6365C435MR	DC-DC-IC	PWM st-down, 500kHz, 4.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CEE	eb	XC6367C445MR	DC-DC-IC	PWM step-up, 4.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CEE	ej	XC6116E045MR	Vdet-IC	4.5V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEE	ek	XC6365C445MR	DC-DC-IC	PWM st-down, 500kHz, 4.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CEF	eb	XC6367C455MR	DC-DC-IC	PWM step-up, 4.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CEF	ec	XC6116E016MR	Vdet-IC	1.6V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEF	ej	XC6116E046MR	Vdet-IC	4.6V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEF	ek	XC6365C455MR	DC-DC-IC	PWM st-down, 500kHz, 4.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CEH	eb	XC6367C465MR	DC-DC-IC	PWM step-up, 4.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CEH	ec	XC6116E017MR	Vdet-IC	1.7V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEH	ej	XC6116E047MR	Vdet-IC	4.7V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEH	ek	XC6365C465MR	DC-DC-IC	PWM st-down, 500kHz, 4.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CEK	eb	XC6367C475MR	DC-DC-IC	PWM step-up, 4.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CEK	ec	XC6116E018MR	Vdet-IC	1.8V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEK	ej	XC6116E048MR	Vdet-IC	4.8V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEK	ek	XC6365C475MR	DC-DC-IC	PWM st-down, 500kHz, 4.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CEL	eb	XC6367C485MR	DC-DC-IC	PWM step-up, 4.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CEL	ec	XC6116E019MR	Vdet-IC	1.9V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEL	ej	XC6116E049MR	Vdet-IC	4.9V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEL	ek	XC6365C485MR	DC-DC-IC	PWM st-down, 500kHz, 4.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CEM	eb	XC6367C495MR	DC-DC-IC	PWM step-up, 4.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CEM	ec	XC6116E020MR	Vdet-IC	2.0V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEM	ej	XC6116E050MR	Vdet-IC	5.0V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEM	ek	XC6365C495MR	DC-DC-IC	PWM st-down, 500kHz, 4.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CEN	ec	XC6116E021MR	Vdet-IC	2.1V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEP	ec	XC6116E022MR	Vdet-IC	2.2V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CER	ec	XC6116E023MR	Vdet-IC	2.3V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CES	ec	XC6116E024MR	Vdet-IC	2.4V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CET	ec	XC6116E025MR	Vdet-IC	2.5V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEU	ec	XC6116E026MR	Vdet-IC	2.6V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEV	ec	XC6116E027MR	Vdet-IC	2.7V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEX	ec	XC6116E028MR	Vdet-IC	2.8V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEY	ec	XC6116E029MR	Vdet-IC	2.9V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
CEZ	ec	XC6116E030MR	Vdet-IC	3.0V±2%, -MR, ±Reset PPO, Rt=200ms	SOT-25	28xf	VD21	6g	Tor
Cf	-	BD48E56G	Vdet-IC	5.6V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
CF	-	74AHCT1G14GW	CMOS-Log	Inverting Schmitt-trigger	SOT-353	28	Log7	6a	Nxp
CF	-	BH29FB1WG	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
CF	-	BH29FB1WHFV	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
CF	-	RN5RT45AA	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
CF	-	V6301FSP5B	Vdet-IC	4.5V±2%, -Reset PPO, 290ms	SOT-23-5	28vdr	VD7	6g	Em
CF-	-	XC62GR2512M	LVR-IC	2.5V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
CF-	eh	XC62GP2512M	LVR-IC	2.5V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
CF+	-	XC62GR2522M	LVR-IC	2.5V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
CF+	eh	XC62GP2522M	LVR-IC	2.5V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
CF0	eb	XC6367C501MR	DC-DC-IC	PWM step-up, 5.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CF0	ej	XC6116F031MR	Vdet-IC	3.1V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CF0	ek	XC6365C501MR	DC-DC-IC	PWM st-down, 100kHz, 5.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CF1	eb	XC6367C511MR	DC-DC-IC	PWM step-up, 5.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CF1	ej	XC6116F032MR	Vdet-IC	3.2V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CF1	ek	XC6365C511MR	DC-DC-IC	PWM st-down, 100kHz, 5.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CF2	eb	XC6367C521MR	DC-DC-IC	PWM step-up, 5.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CF2	ej	XC6116F033MR	Vdet-IC	3.3V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CF2	ek	XC6365C521MR	DC-DC-IC	PWM st-down, 100kHz, 5.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CF3	eb	XC6367C531MR	DC-DC-IC	PWM step-up, 5.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CF3	ej	XC6116F034MR	Vdet-IC	3.4V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CF3	ek	XC6365C531MR	DC-DC-IC	PWM st-down, 100kHz, 5.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CF4	eb	XC6367C541MR	DC-DC-IC	PWM step-up, 5.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CF4	ej	XC6116F035MR	Vdet-IC	3.5V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CF4	ek	XC6365C541MR	DC-DC-IC	PWM st-down, 100kHz, 5.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CF5	eb	XC6367C551MR	DC-DC-IC	PWM step-up, 5.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CF5	ej	XC6116F036MR	Vdet-IC	3.6V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CF5	ek	XC6365C551MR	DC-DC-IC	PWM st-down, 100kHz, 5.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CF6	eb	XC6367C561MR	DC-DC-IC	PWM step-up, 5.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CF6	ej	XC6116F037MR	Vdet-IC	3.7V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CF6	ek	XC6365C561MR	DC-DC-IC	PWM st-down, 100kHz, 5.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CF7	eb	XC6367C571MR	DC-DC-IC	PWM step-up, 5.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CF7	ej	XC6116F038MR	Vdet-IC	3.8V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CF7	ek	XC6365C571MR	DC-DC-IC	PWM st-down, 100kHz, 5.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CF8	-	XC9235B08DMR-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CF8	eb	XC6367C581MR	DC-DC-IC	PWM step-up, 5.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CF8	ej	XC6116F039MR	Vdet-IC	3.9V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CF8	ek	XC6365C581MR	DC-DC-IC	PWM st-down, 100kHz, 5.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CF9	-	XC9235B09DMR-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CF9	eb	XC6367C591MR	DC-DC-IC	PWM step-up, 5.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CF9	ej	XC6116F040MR	Vdet-IC	4.0V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CF9	ek	XC6365C591MR	DC-DC-IC	PWM st-down, 100kHz, 5.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CFA	eb	XC6367C505MR	DC-DC-IC	PWM step-up, 5.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CFA	ej	XC6116F041MR	Vdet-IC	4.1V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFA	ek	XC6365C505MR	DC-DC-IC	PWM st-down, 500kHz, 5.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CFB	-	XC6213B12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFB	eb	XC6367C515MR	DC-DC-IC	PWM step-up, 5.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CFB	ej	XC6116F042MR	Vdet-IC	4.2V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFB	ek	XC6365C515MR	DC-DC-IC	PWM st-down, 500kHz, 5.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CFC	-	XC6213B13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFC	eb	XC6367C525MR	DC-DC-IC	PWM step-up, 5.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CFC	ej	XC6116F043MR	Vdet-IC	4.3V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFC	ek	XC6365C525MR	DC-DC-IC	PWM st-down, 500kHz, 5.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CFD	-	XC6213B14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFD	eb	XC6367C535MR	DC-DC-IC	PWM step-up, 5.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CFD	ej	XC6116F044MR	Vdet-IC	4.4V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFD	ek	XC6365C535MR	DC-DC-IC	PWM st-down, 500kHz, 5.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CFE	-	XC6213B15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFE	eb	XC6367C545MR	DC-DC-IC	PWM step-up, 5.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CFE	ej	XC6116F045MR	Vdet-IC	4.5V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFE	ek	XC6365C545MR	DC-DC-IC	PWM st-down, 500kHz, 5.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CFF	-	XC6213B16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFF	eb	XC6367C555MR	DC-DC-IC	PWM step-up, 5.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CFF	ec	XC6116F016MR	Vdet-IC	1.6V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFF	ej	XC6116F046MR	Vdet-IC	4.6V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFF	ek	XC6365C555MR	DC-DC-IC	PWM st-down, 500kHz, 5.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CFH	-	XC6213B17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFH	eb	XC6367C565MR	DC-DC-IC	PWM step-up, 5.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CFH	ec	XC6116F017MR	Vdet-IC	1.7V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFH	ej	XC6116F047MR	Vdet-IC	4.7V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFH	ek	XC6365C565MR	DC-DC-IC	PWM st-down, 500kHz, 5.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CFK	-	XC6213B18AMR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFK	eb	XC6367C575MR	DC-DC-IC	PWM step-up, 5.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CFK	ec	XC6116F018MR	Vdet-IC	1.8V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFK	ej	XC6116F048MR	Vdet-IC	4.8V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFK	ek	XC6365C575MR	DC-DC-IC	PWM st-down, 500kHz, 5.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CFL	-	XC6213B19AMR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFL	-	XC9235B0LDMR-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CFL	eb	XC6367C585MR	DC-DC-IC	PWM step-up, 5.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CFL	ec	XC6116F019MR	Vdet-IC	1.9V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFL	ej	XC6116F049MR	Vdet-IC	4.9V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFL	ek	XC6365C585MR	DC-DC-IC	PWM st-down, 500kHz, 5.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CFM	-	XC6213B20AMR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFM	-	XC9235B0MDMR-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CFM	eb	XC6367C595MR	DC-DC-IC	PWM step-up, 5.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CFM	ec	XC6116F020MR	Vdet-IC	2.0V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFM	ej	XC6116F050MR	Vdet-IC	5.0V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFM	ek	XC6365C595MR	DC-DC-IC	PWM st-down, 500kHz, 5.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CFN	-	XC6213B21AMR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFN	ec	XC6116F021MR	Vdet-IC	2.1V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFP	-	XC6213B22AMR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CFP	ec	XC6116F022MR	Vdet-IC	2.2V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFR	-	XC6213B23AMR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFR	ec	XC6116F023MR	Vdet-IC	2.3V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFS	-	XC6213B24AMR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFS	ec	XC6116F024MR	Vdet-IC	2.4V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFT	-	XC6213B25AMR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFT	ec	XC6116F025MR	Vdet-IC	2.5V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFU	-	XC6213B26AMR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFU	ec	XC6116F026MR	Vdet-IC	2.6V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFV	-	XC6213B27AMR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFV	ec	XC6116F027MR	Vdet-IC	2.7V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFX	-	XC6213B28AMR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFX	ec	XC6116F028MR	Vdet-IC	2.8V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFY	-	XC6213B29AMR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFY	ec	XC6116F029MR	Vdet-IC	2.9V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
CFZ	-	XC6213B30AMR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CFZ	ec	XC6116F030MR	Vdet-IC	3.0V±2%, -MR, ±Reset PPO, Rt=400ms	SOT-25	28xf	VD21	6g	Tor
Cg	-	BD48E57G	Vdet-IC	5.7V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
CG	-	74AHCT1G32GW	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6a	Nxp
CG	-	AAT3221IGV-1.9	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
CG	-	BH30FB1WG	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
CG	-	BH30FB1WHFV	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
CG	-	PI74STX1GT86CX	CMOS-Log	2-input EXCLUSIVE-OR gate	SC-70-5	28	Log5	6a	Per
CG	-	PI74STX1GT86TX	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-23-5	28	Log5	6a	Per
CG	-	RN5RT46AA	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
CG	-	V6301GSP5B	Vdet-IC	2.0V±2%, +Reset PPO, 290ms	SOT-23-5	28vdo	VD3	6g	Em
Ch	-	BD48E58G	Vdet-IC	5.8V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
CH	-	74AHCT1G86GW	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353	28	Log5	6a	Nxp
CH	-	BH31FB1WG	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
CH	-	BH31FB1WHFV	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
CH	-	RN5RT47AA	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
CH	-	V6301HSP5B	Vdet-IC	2.4V±2%, +Reset PPO, 290ms	SOT-23-5	28vdo	VD3	6g	Em
CH-	-	XC62GR2612M	LVR-IC	2.6V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
CH-	eh	XC62GP2612M	LVR-IC	2.6V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
CH+	-	XC62GR2622M	LVR-IC	2.6V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
CH+	eh	XC62GP2622M	LVR-IC	2.6V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
CH=	-	RT9013-13GU5	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6g	Rct
CH0	-	XC9235B10DMR-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CH0	eb	XC6367C601MR	DC-DC-IC	PWM step-up, 6.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CH0	ej	XC6116H031MR	Vdet-IC	3.1V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CH0	ek	XC6365C601MR	DC-DC-IC	PWM st-down, 100kHz, 6.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CH1	-	XC9235B11DMR-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CH1	eb	XC6367C611MR	DC-DC-IC	PWM step-up, 6.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CH1	ej	XC6116H032MR	Vdet-IC	3.2V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CH2	-	XC9235B12DMR-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CH2	eb	XC6367C621MR	DC-DC-IC	PWM step-up, 6.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CH2	ej	XC6116H033MR	Vdet-IC	3.3V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CH3	-	XC9235B13DMR-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CH3	eb	XC6367C631MR	DC-DC-IC	PWM step-up, 6.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CH3	ej	XC6116H034MR	Vdet-IC	3.4V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CH4	-	XC9235B14DMR-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CH4	eb	XC6367C641MR	DC-DC-IC	PWM step-up, 6.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CH4	ej	XC6116H035MR	Vdet-IC	3.5V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CH5	-	XC9235B15DMR-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CH5	eb	XC6367C651MR	DC-DC-IC	PWM step-up, 6.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CH5	ej	XC6116H036MR	Vdet-IC	3.6V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CH6	-	XC9235B16DMR-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CH6	ej	XC6116H037MR	Vdet-IC	3.7V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CH7	-	XC9235B17DMR-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CH7	ej	XC6116H038MR	Vdet-IC	3.8V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CH8	-	XC9235B18DMR-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CH8	ej	XC6116H039MR	Vdet-IC	3.9V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CH9	-	XC9235B19DMR-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CH9	ej	XC6116H040MR	Vdet-IC	4.0V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHA	-	XC9235B1ADMR-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CHA	eb	XC6367C605MR	DC-DC-IC	PWM step-up, 6.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CHA	ej	XC6116H041MR	Vdet-IC	4.1V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHA	ek	XC6365C605MR	DC-DC-IC	PWM st-down, 500kHz, 6.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
CHB	-	XC9235B1BDMR-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CHB	eb	XC6367C615MR	DC-DC-IC	PWM step-up, 6.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CHB	ej	XC6116H042MR	Vdet-IC	4.2V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHC	-	XC9235B1CDMR-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CHC	eb	XC6367C625MR	DC-DC-IC	PWM step-up, 6.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CHC	ej	XC6116H043MR	Vdet-IC	4.3V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHD	-	XC9235B1DDMR-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CHD	eb	XC6367C635MR	DC-DC-IC	PWM step-up, 6.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CHD	ej	XC6116H044MR	Vdet-IC	4.4V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHE	-	XC9235B1EDMR-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CHE	eb	XC6367C645MR	DC-DC-IC	PWM step-up, 6.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CHE	ej	XC6116H045MR	Vdet-IC	4.5V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHF	-	XC9235B1FDMR-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CHF	eb	XC6367C655MR	DC-DC-IC	PWM step-up, 6.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
CHF	ec	XC6116H016MR	Vdet-IC	1.6V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHF	ej	XC6116H046MR	Vdet-IC	4.6V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHH	-	XC9235B1HDMR-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CHH	ec	XC6116H017MR	Vdet-IC	1.7V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHH	ej	XC6116H047MR	Vdet-IC	4.7V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHK	-	XC9235B1KDMR-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CHK	ec	XC6116H018MR	Vdet-IC	1.8V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHK	ej	XC6116H048MR	Vdet-IC	4.8V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHL	-	XC9235B1LDMR-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CHL	ec	XC6116H019MR	Vdet-IC	1.9V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHL	ej	XC6116H049MR	Vdet-IC	4.9V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHM	-	XC9235B1MDMR-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CHM	ec	XC6116H020MR	Vdet-IC	2.0V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHM	ej	XC6116H050MR	Vdet-IC	5.0V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHN	ec	XC6116H021MR	Vdet-IC	2.1V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHP	ec	XC6116H022MR	Vdet-IC	2.2V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHR	ec	XC6116H023MR	Vdet-IC	2.3V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHS	ec	XC6116H024MR	Vdet-IC	2.4V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHT	ec	XC6116H025MR	Vdet-IC	2.5V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHU	ec	XC6116H026MR	Vdet-IC	2.6V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHV	ec	XC6116H027MR	Vdet-IC	2.7V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHX	ec	XC6116H028MR	Vdet-IC	2.8V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHY	ec	XC6116H029MR	Vdet-IC	2.9V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CHZ	ec	XC6116H030MR	Vdet-IC	3.0V±2%, -MR, ±Reset PPO, Rt=1.6s	SOT-25	28xf	VD21	6g	Tor
CI	-	V6301ISP5B	Vdet-IC	2.8V±2%, +Reset PPO, 290ms	SOT-23-5	28vdo	VD3	6g	Em
CJ	-	BH33FB1WG	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
CJ	-	BH33FB1WHFV	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
CJ	-	RN5RT48AA	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
CJ	-	V6301JSP5B	Vdet-IC	3.5V±2%, +Reset PPO, 290ms	SOT-23-5	28vdo	VD3	6g	Em
CJ-	-	RT9169-20PB	LVR-IC	LDO, 2.V±2%, 100mA, -CE	SOT-23-5	28cx	VR4	6g	Rct
Ck	-	BD48E59G	Vdet-IC	5.9V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
CK	-	BH15LB1WG	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
CK	-	BH15LB1WHFV	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
CK	-	RN5RT49AA	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
CK	-	RT9169-18CB	LVR-IC	LDO, 1.8V±2%, 100mA, -CE	SOT-23-5	28cx	VR4	6g	Rct
CK	-	V6301KSP5B	Vdet-IC	4V±2%, +Reset PPO, 290ms	SOT-23-5	28vdo	VD3	6g	Em
CK-	-	RT9169-18PB	LVR-IC	LDO, 1.8V±2%, 100mA, -CE	SOT-23-5	28cx	VR4	6g	Rct
CK-	-	XC62GR2712M	LVR-IC	2.7V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
CK-	eh	XC62GP2712M	LVR-IC	2.7V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
CK+	-	XC62GR2722M	LVR-IC	2.7V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
CK+	eh	XC62GP2722M	LVR-IC	2.7V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
CK0	-	XC9235B20DMR-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CK1	-	XC9235B21DMR-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CK2	-	XC9235B22DMR-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CK3	-	XC9235B23DMR-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CK4	-	XC9235B24DMR-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CK5	-	XC9235B25DMR-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CK6	-	XC9235B26DMR-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CK7	-	XC9235B27DMR-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CK8	-	XC9235B28DMR-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CK9	-	XC9235B29DMR-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CKA	-	XC9235B2ADMR-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CKB	-	XC9235B2BDMR-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CKC	-	XC9235B2CDMR-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CKD	-	XC9235B2DDMR-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CKE	-	XC9235B2EDMR-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CKF	-	XC9235B2FDMR-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CKH	-	XC9235B2HDMR-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CKK	-	XC9235B2KDMR-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CKL	-	XC9235B2LDMR-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CKM	-	XC9235B2MDMR-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CL	-	74AHCT1G66GW	CMOS-Log	Single-pole single-throw analog switch	SOT-353	28	Log16	6a	Nxp
CL	-	BH18LB1WG	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
CL	-	BH18LB1WHFV	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
CL	-	R1112N401A	LVR-IC	LDO, Low noise, 4.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
CL	-	V6301LSP5B	Vdet-IC	4.5V±2%, +Reset PPO, 290ms	SOT-23-5	28vdo	VD3	6g	Em
CL-	-	XC62GR2812M	LVR-IC	2.8V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
CL-	eh	XC62GP2812M	LVR-IC	2.8V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
CL+	-	XC62GR2822M	LVR-IC	2.8V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
CL+	eh	XC62GP2822M	LVR-IC	2.8V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
CL=	-	RT9013A-30GU5	LVR-IC	LDO, 3.0V±2%, 120mA, +CE	SC-70-5	28cx	VR4	6g	Rct
CL0	-	XC9235B30DMR-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CL1	-	XC9235B31DMR-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CL2	-	XC9235B32DMR-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CL3	-	XC9235B33DMR-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CL4	-	XC9235B34DMR-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CL5	-	XC9235B35DMR-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CL6	-	XC9235B36DMR-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CL7	-	XC9235B37DMR-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CL8	-	XC9235B38DMR-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CL9	-	XC9235B39DMR-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CLA	-	XC9235B3ADMR-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CLB	-	XC9235B3BDMR-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CLC	-	XC9235B3CDMR-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CLD	-	XC9235B3DDMR-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CLE	-	XC9235B3EDMR-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CLF	-	XC9235B3FDMR-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CLH	-	XC9235B3HDMR-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CLK	-	XC9235B3KDMR-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CLL	-	XC9235B3LDMR-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CLM	-	XC9235B3MDMR-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
Cm	-	BD48E60G	Vdet-IC	6.0V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
CM	-	74AHCT1G125GW	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log14	6a	Nxp
CM	-	BH1JLB1WHFV	LVR-IC	LDO, 1.85V±1.0%, 150mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
CM	-	R1112N411A	LVR-IC	LDO, Low noise, 4.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
CM	-	V6301MSP5B	Vdet-IC	2.0V±2%, -Reset ODO, 290ms	SOT-23-5	28vdr	VD6	6g	Em
CM-	-	XC62GR2912M	LVR-IC	2.9V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
CM-	eh	XC62GP2912M	LVR-IC	2.9V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
CM+	-	XC62GR2922M	LVR-IC	2.9V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
CM+	eh	XC62GP2922M	LVR-IC	2.9V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
CM=	-	RT9013B-12GU5	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6g	Rct
CM0	-	XC6213B31AMR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CM0	-	XC9235B40DMR-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CM1	-	XC6213B32AMR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CM2	-	XC6213B33AMR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CM3	-	XC6213B34AMR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CM4	-	XC6213B35AMR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CM5	-	XC6213B36AMR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CM6	-	XC6213B37AMR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CM7	-	XC6213B38AMR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CM8	-	XC6213B39AMR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CM9	-	XC6213B40AMR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CMA	-	XC6213B41AMR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CMB	-	XC6213B42AMR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CMC	-	XC6213B43AMR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CMD	-	XC6213B44AMR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CME	-	XC6213B45AMR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CMF	-	XC6213B46AMR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CMH	-	XC6213B47AMR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CMK	-	XC6213B48AMR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CML	-	XC6213B49AMR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
Cn	-	BD49E23G	Vdet-IC	2.3V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
CN	-	74AHCT1G126GW	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log13	6a	Nxp
CN	-	R1112N421A	LVR-IC	LDO, Low noise, 4.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
CN	-	V6301NSP5B	Vdet-IC	2.4V±2%, -Reset ODO, 290ms	SOT-23-5	28vdr	VD6	6g	Em
CN8	-	XC9235G08CMR-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CN9	-	XC9235G09CMR-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CNL	-	XC9235G0LCMR-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CNM	-	XC9235G0MCMR-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CO	-	V6301OSP5B	Vdet-IC	2.8V±2%, -Reset ODO, 290ms	SOT-23-5	28vdr	VD6	6g	Em
Cp	-	BD49E24G	Vdet-IC	2.4V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
CP	-	74AHCT1G79GW	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT-353	28	Log20	6a	Nxp
CP	-	R1112N431A	LVR-IC	LDO, Low noise, 4.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
CP	-	V6301PSP5B	Vdet-IC	3.5V±2%, -Reset ODO, 290ms	SOT-23-5	28vdr	VD6	6g	Em
CP0	-	XC9235G10CMR-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CP1	-	XC9235G11CMR-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CP2	-	XC9235G12CMR-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CP3	-	XC9235G13CMR-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CP4	-	XC9235G14CMR-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CP5	-	XC9235G15CMR-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CP6	-	XC9235G16CMR-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CP7	-	XC9235G17CMR-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CP8	-	XC9235G18CMR-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CP9	-	XC9235G19CMR-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CPA	-	XC9235G1ACMR-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CPB	-	XC9235G1BCMR-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CPC	-	XC9235G1CCMR-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CPD	-	XC9235G1DCMR-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CPE	-	XC9235G1ECMR-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CPF	-	XC9235G1FCMR-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CPH	-	XC9235G1HCMR-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CPK	-	XC9235G1KCMR-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CPL	-	XC9235G1LCMR-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CPM	-	XC9235G1MCMR-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CQ	-	R1112N441A	LVR-IC	LDO, Low noise, 4.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
CQ	-	V6301QSP5B	Vdet-IC	4V±2%, -Reset ODO, 290ms	SOT-23-5	28vdr	VD6	6g	Em
Cr	-	BD49E25G	Vdet-IC	2.5V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
CR	-	74AHCT1G06GW	CMOS-Log	Inverter (ODO)	SOT-353	28	Log19	6a	Nxp
CR	-	AT1201-30XR	LVR-IC	LDO, LN, +CE, 3V±2%, 150mA	SOT-23-5	28un	VR7	6a	Atr
CR	-	R1112N451A	LVR-IC	LDO, Low noise, 4.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
CR	-	V6301RSP5B	Vdet-IC	4.5V±2%, -Reset ODO, 290ms	SOT-23-5	28vdr	VD6	6g	Em
CR0	-	XC9235G20CMR-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CR1	-	XC9235G21CMR-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CR2	-	XC9235G22CMR-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CR3	-	XC9235G23CMR-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CR4	-	XC9235G24CMR-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CR5	-	XC9235G25CMR-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CR6	-	XC9235G26CMR-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CR7	-	XC9235G27CMR-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CR8	-	XC9235G28CMR-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CR9	-	XC9235G29CMR-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CRA	-	XC9235G2ACMR-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CRB	-	XC9235G2BCMR-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CRC	-	XC9235G2CCMR-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CRD	-	XC9235G2DCMR-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CRE	-	XC9235G2ECMR-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CRF	-	XC9235G2FCMR-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CRH	-	XC9235G2HCMR-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CRK	-	XC9235G2KCMR-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CRL	-	XC9235G2LCMR-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CRM	-	XC9235G2MCMR-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CS	-	74AHCT1G07GW	CMOS-Log	Noninverting buffer/driver (ODO)	SOT-353	28	Log8	6a	Nxp
CS	-	R1112N461A	LVR-IC	LDO, Low noise, 4.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
CS-	-	RT9193-27PB	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
CS=	-	RT9193-27GB	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
CS0	-	XC9235G30CMR-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CS1	-	XC9235G31CMR-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CS2	-	XC9235G32CMR-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CS3	-	XC9235G33CMR-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CS4	-	XC9235G34CMR-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CS5	-	XC9235G35CMR-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CS6	-	XC9235G36CMR-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CS7	-	XC9235G37CMR-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CS8	-	XC9235G38CMR-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CS9	-	XC9235G39CMR-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CSA	-	XC9235G3ACMR-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CSB	-	XC9235G3BCMR-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CSC	-	XC9235G3CCMR-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CSD	-	XC9235G3DCMR-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CSE	-	XC9235G3ECMR-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CSF	-	XC9235G3FCMR-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CSH	-	XC9235G3HCMR-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CSK	-	XC9235G3KCMR-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CSL	-	XC9235G3LCMR-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CSM	-	XC9235G3MCMR-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CT	-	R1112N471A	LVR-IC	LDO, Low noise, 4.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
CT-	-	RT9198-27PB	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
CT0	-	XC9235G40CMR-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CU	-	R1112N481A	LVR-IC	LDO, Low noise, 4.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
CU-	-	RT9193-2HPB	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
CU=	-	RT9193-2HGB	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
CU8	-	XC9235G08DMR-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CU9	-	XC9235G09DMR-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CUD	-	S-817A14AMC-CUDT2G	LVR-IC	1.4V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CUF	-	S-817A16AMC-CUFT2G	LVR-IC	1.6V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CUL	-	XC9235G0LDMR-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CUM	-	XC9235G0MDMR-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
Cv	-	BD48E53G	Vdet-IC	5.3V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
CV	-	BH25NB1WHFV	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
CV	-	R1112N491A	LVR-IC	LDO, Low noise, 4.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
CV0	-	XC9235G10DMR-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CV1	-	XC9235G11DMR-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CV2	-	XC9235G12DMR-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CV3	-	XC9235G13DMR-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CV4	-	XC9235G14DMR-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CV5	-	XC9235G15DMR-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CV6	-	XC9235G16DMR-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CV7	-	XC9235G17DMR-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CV8	-	XC9235G18DMR-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CV9	-	XC9235G19DMR-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CVA	-	XC9235G1ADMR-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CVB	-	XC9235G1BDMR-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CVC	-	XC9235G1CDMR-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CVD	-	XC9235G1DDMR-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CVE	-	XC9235G1EDMR-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CVF	-	XC9235G1FDMR-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CVH	-	XC9235G1HDMR-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CVK	-	XC9235G1KDMR-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CVL	-	XC9235G1LDMR-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CVM	-	XC9235G1MDMR-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CW	-	BH28NB1WHFV	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
CW-	-	RT9198-31PB	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
CWA	-	S-817B11AMC-CWAT2G	LVR-IC	1.1V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWB	-	S-817B12AMC-CWBT2G	LVR-IC	1.2V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWC	-	S-817B13AMC-CWCT2G	LVR-IC	1.3V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWD	-	S-817B14AMC-CWDT2G	LVR-IC	1.4V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWE	-	S-817B15AMC-CWET2G	LVR-IC	1.5V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWF	-	S-817B16AMC-CWFT2G	LVR-IC	1.6V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWG	-	S-817B17AMC-CWGT2G	LVR-IC	1.7V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWH	-	S-817B18AMC-CWHT2G	LVR-IC	1.8V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWI	-	S-817B19AMC-CWIT2G	LVR-IC	1.9V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWJ	-	S-817B20AMC-CWJT2G	LVR-IC	2.0V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWK	-	S-817B21AMC-CWKT2G	LVR-IC	2.1V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWL	-	S-817B22AMC-CWLT2G	LVR-IC	2.2V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWM	-	S-817B23AMC-CWMT2G	LVR-IC	2.3V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWN	-	S-817B24AMC-CWNT2G	LVR-IC	2.4V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWO	-	S-817B25AMC-CWOT2G	LVR-IC	2.5V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWP	-	S-817B26AMC-CWPT2G	LVR-IC	2.6V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWQ	-	S-817B27AMC-CWQT2G	LVR-IC	2.7V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWR	-	S-817B28AMC-CWRT2G	LVR-IC	2.8V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWS	-	S-817B29AMC-CWST2G	LVR-IC	2.9V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWT	-	S-817B30AMC-CWTT2G	LVR-IC	3.0V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWU	-	S-817B31AMC-CWUT2G	LVR-IC	3.1V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWV	-	S-817B32AMC-CWVT2G	LVR-IC	3.2V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWW	-	S-817B33AMC-CWWT2G	LVR-IC	3.3V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWX	-	S-817B34AMC-CWXT2G	LVR-IC	3.4V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWY	-	S-817B35AMC-CWYT2G	LVR-IC	3.5V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CWZ	-	S-817B36AMC-CWZT2G	LVR-IC	3.6V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CX	-	AAT3221IGV-2.8	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6k	Sky
CX	-	AT1201-30X	LVR-IC	LDO, LN, +CE, 3V±2%, 150mA	SOT-23-5	28vrx	VR7	6a	Atr
CX	-	BH29NB1WHFV	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
CX0	-	XC9235G20DMR-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CX1	-	XC9235G21DMR-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CX2	-	XC9235G22DMR-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CX3	-	XC9235G23DMR-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CX4	-	XC9235G24DMR-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CX5	-	XC9235G25DMR-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CX6	-	XC9235G26DMR-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CX7	-	XC9235G27DMR-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CX8	-	XC9235G28DMR-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CX9	-	XC9235G29DMR-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CXA	-	S-817B37AMC-CXAT2G	LVR-IC	3.7V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CXA	-	XC9235G2ADMR-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CXB	-	S-817B38AMC-CXBT2G	LVR-IC	3.8V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CXB	-	XC6213B122MR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXB	-	XC9235G2BDMR-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CXC	-	S-817B39AMC-CXCT2G	LVR-IC	3.9V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CXC	-	XC6213B132MR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXC	-	XC9235G2CDMR-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CXD	-	S-817B40AMC-CXDT2G	LVR-IC	4.0V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CXD	-	XC6213B142MR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXD	-	XC9235G2DDMR-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CXE	-	S-817B41AMC-CXET2G	LVR-IC	4.1V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CXE	-	XC6213B152MR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXE	-	XC9235G2EDMR-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CXF	-	S-817B42AMC-CXFT2G	LVR-IC	4.2V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CXF	-	XC6213B162MR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXF	-	XC9235G2FDMR-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CXG	-	S-817B43AMC-CXGT2G	LVR-IC	4.3V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CXH	-	S-817B44AMC-CXHT2G	LVR-IC	4.4V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CXH	-	XC6213B172MR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXH	-	XC9235G2HDMR-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CXI	-	S-817B45AMC-CXIT2G	LVR-IC	4.5V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CXJ	-	S-817B46AMC-CXJT2G	LVR-IC	4.6V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CXK	-	S-817B47AMC-CXKT2G	LVR-IC	4.7V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CXK	-	XC6213B182MR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXK	-	XC9235G2KDMR-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CXL	-	S-817B48AMC-CXLT2G	LVR-IC	4.8V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CXL	-	XC6213B192MR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXL	-	XC9235G2LDMR-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CXM	-	S-817B49AMC-CXMT2G	LVR-IC	4.9V±2%, 50mA	SOT-23-5	28vu	VR1	6g	Sii
CXM	-	XC6213B202MR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXM	-	XC9235G2MDMR-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CXN	-	S-817B50AMC-CXNT2G	LVR-IC	5.0V±2%, 75mA	SOT-23-5	28vu	VR1	6g	Sii
CXN	-	XC6213B212MR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXO	-	S-817B51AMC-CXOT2G	LVR-IC	5.1V±2%, 75mA	SOT-23-5	28vu	VR1	6g	Sii
CXP	-	S-817B52AMC-CXPT2G	LVR-IC	5.2V±2%, 75mA	SOT-23-5	28vu	VR1	6g	Sii
CXP	-	XC6213B222MR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXQ	-	S-817B53AMC-CXQT2G	LVR-IC	5.3V±2%, 75mA	SOT-23-5	28vu	VR1	6g	Sii
CXR	-	S-817B54AMC-CXRT2G	LVR-IC	5.4V±2%, 75mA	SOT-23-5	28vu	VR1	6g	Sii
CXR	-	XC6213B232MR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXS	-	S-817B55AMC-CXST2G	LVR-IC	5.5V±2%, 75mA	SOT-23-5	28vu	VR1	6g	Sii
CXS	-	XC6213B242MR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXT	-	S-817B56AMC-CXTT2G	LVR-IC	5.6V±2%, 75mA	SOT-23-5	28vu	VR1	6g	Sii
CXT	-	XC6213B252MR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXU	-	S-817B57AMC-CXUT2G	LVR-IC	5.7V±2%, 75mA	SOT-23-5	28vu	VR1	6g	Sii
CXU	-	XC6213B262MR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXV	-	S-817B58AMC-CXVT2G	LVR-IC	5.8V±2%, 75mA	SOT-23-5	28vu	VR1	6g	Sii
CXV	-	XC6213B272MR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXW	-	S-817B59AMC-CXWT2G	LVR-IC	5.9V±2%, 75mA	SOT-23-5	28vu	VR1	6g	Sii
CXX	-	S-817B60AMC-CXXT2G	LVR-IC	6.0V±2%, 75mA	SOT-23-5	28vu	VR1	6g	Sii
CXX	-	XC6213B282MR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXY	-	XC6213B292MR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
CXZ	-	XC6213B302MR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
Cy	-	BD49E26G	Vdet-IC	2.6V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
CY	-	BH30NB1WHFV	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
CY	-	TC1054-1.8VCT713	LVR-IC	LDO, 1.8V±2%, 50mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
CY0	-	XC9235G30DMR-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CY1	-	XC9235G31DMR-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CY2	-	XC9235G32DMR-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CY3	-	XC9235G33DMR-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CY4	-	XC9235G34DMR-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CY5	-	XC9235G35DMR-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CY6	-	XC9235G36DMR-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CY7	-	XC9235G37DMR-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CY8	-	XC9235G38DMR-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CY9	-	XC9235G39DMR-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CYA	-	XC9235G3ADMR-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CYB	-	XC9235G3BDMR-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CYC	-	XC9235G3CDMR-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CYD	-	XC9235G3DDMR-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CYE	-	XC9235G3EDMR-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CYF	-	XC9235G3FDMR-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CYH	-	XC9235G3HDMR-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CYK	-	XC9235G3KDMR-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CYL	-	XC9235G3LDMR-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CYM	-	XC9235G3MDMR-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
CZ	-	BH31NB1WHFV	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	HVSOF5	30vr3	VR4	6e	Rhm
CZ	-	RT9167-50CBR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
CZ	-	TC1054-2.8VCT713	LVR-IC	LDO, 2.8V±2%, 50mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
CZ0	-	XC9235G40DMR-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
D0	-	AP131-41TW	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
D0	-	AP131-41W	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
D0	-	R1111N501A	LVR-IC	LDO, Low noise, 5.0V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D0	-	Si91842DT-36	LVR-IC	LDO, LN, 3.6V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
D0	-	TC1055-4.0VCT713	LVR-IC	LDO, 4.0V±2%, 100mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
D0	ea	RN5VD30AA	Vdet-IC	3V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D0	eu	BL8555-20NQ	LVR-IC	LDO, 2.0V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D0	eu	BL8555-20NRA	LVR-IC	LDO, 2.0V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D0	eu	BL8555-20NRB	LVR-IC	LDO, 2.0V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D0	eu	LR8555-20NQ	LVR-IC	LDO, 2.0V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D0	eu	LR8555-20NRA	LVR-IC	LDO, 2.0V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D0	eu	LR8555-20NRB	LVR-IC	LDO, 2.0V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D0	fg	BL8555-30NQ	LVR-IC	LDO, 3.0V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D0	fg	BL8555-30NRA	LVR-IC	LDO, 3.0V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D0	fg	BL8555-30NRB	LVR-IC	LDO, 3.0V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D0	fg	LR8555-30NQ	LVR-IC	LDO, 3.0V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D0	fg	LR8555-30NRA	LVR-IC	LDO, 3.0V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D0	fg	LR8555-30NRB	LVR-IC	LDO, 3.0V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D0	fh	BL8555-40NQ	LVR-IC	LDO, 4.0V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D0	fh	BL8555-40NRA	LVR-IC	LDO, 4.0V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D0	fh	BL8555-40NRB	LVR-IC	LDO, 4.0V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D0	fh	LR8555-40NQ	LVR-IC	LDO, 4.0V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D0	fh	LR8555-40NRA	LVR-IC	LDO, 4.0V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D0	fh	LR8555-40NRB	LVR-IC	LDO, 4.0V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D0	fi	BL8555-50NQ	LVR-IC	LDO, 5.0V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D0	fi	BL8555-50NRA	LVR-IC	LDO, 5.0V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D0	fi	BL8555-50NRB	LVR-IC	LDO, 5.0V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D0	fi	LR8555-50NQ	LVR-IC	LDO, 5.0V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D0	fi	LR8555-50NRA	LVR-IC	LDO, 5.0V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D0	fi	LR8555-50NRB	LVR-IC	LDO, 5.0V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D0	fk	BL8555-30DQ	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D0	fk	BL8555-30DRA	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D0	fk	BL8555-30DRB	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D0	fk	LR8555-30DQ	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D0	fk	LR8555-30DRA	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D0	fk	LR8555-30DRB	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D0	fm	BL8555-40DQ	LVR-IC	LDO, 4.0V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D0	fm	BL8555-40DRA	LVR-IC	LDO, 4.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D0	fm	BL8555-40DRB	LVR-IC	LDO, 4.0V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D0	fm	LR8555-40DQ	LVR-IC	LDO, 4.0V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D0	fm	LR8555-40DRA	LVR-IC	LDO, 4.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D0	fm	LR8555-40DRB	LVR-IC	LDO, 4.0V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D0	fn	BL8555-50DQ	LVR-IC	LDO, 5.0V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D0	fn	BL8555-50DRA	LVR-IC	LDO, 5.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D0	fn	BL8555-50DRB	LVR-IC	LDO, 5.0V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D0	fn	LR8555-50DQ	LVR-IC	LDO, 5.0V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D0	fn	LR8555-50DRA	LVR-IC	LDO, 5.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D0	fn	LR8555-50DRB	LVR-IC	LDO, 5.0V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D0	fp	BL8555-20DQ	LVR-IC	LDO, 2.0V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D0	fp	BL8555-20DRA	LVR-IC	LDO, 2.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D0	fp	BL8555-20DRB	LVR-IC	LDO, 2.0V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D0	fp	LR8555-20DQ	LVR-IC	LDO, 2.0V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D0	fp	LR8555-20DRA	LVR-IC	LDO, 2.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D0	fp	LR8555-20DRB	LVR-IC	LDO, 2.0V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D0-	-	RT9193-31PB	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
D0=	-	RT9193-31GB	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
D008	-	RP200Q082D	LVR-IC	LDO, 0.8V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D009	-	RP200Q092D	LVR-IC	LDO, 0.9V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D00A	-	LM3411AM5-3.3	LVR-IC	Precision secondary regulator/driver, 3.3V±0.5%	SOT-23-5	28vi	-	6g	Nsc
D00B	-	LM3411M5-3.3	LVR-IC	Precision secondary regulator/driver, 3.3V±1%	SOT-23-5	28vi	-	6g	Nsc
D01	-	RP173N121A5	LVR-IC	LDO, 1.25V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D010	-	RP200Q102D	LVR-IC	LDO, 1.0V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D011	-	RP200Q112D	LVR-IC	LDO, 1.1V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D012	-	RP200Q122D	LVR-IC	LDO, 1.2V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D013	-	RP200Q132D	LVR-IC	LDO, 1.3V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D014	-	RP200Q142D	LVR-IC	LDO, 1.4V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D015	-	RP200Q152D	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D016	-	RP200Q162D	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D017	-	RP200Q172D	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D018	-	RP200Q182D	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D019	-	RP200Q192D	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D01A	-	LM3411AM5-5.0	LVR-IC	Precision secondary regulator/driver, 5V±0.5%	SOT-23-5	28vi	-	6g	Nsc
D01B	-	LM3411M5-5.0	LVR-IC	Precision secondary regulator/driver, 5V±1%	SOT-23-5	28vi	-	6g	Nsc
D02	-	RP173N181A5	LVR-IC	LDO, 1.85V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D020	-	RP200Q202D	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D021	-	RP200Q212D	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D022	-	RP200Q222D	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D023	-	RP200Q232D	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D024	-	RP200Q242D	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D025	-	RP200Q252D	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D026	-	RP200Q262D	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D027	-	RP200Q272D	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D028	-	RP200Q282D	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D029	-	RP200Q292D	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D02A	-	LM3420AM5-4.2	BM-IC	Li-Ion charge controller, 4.2V±0.5%	SOT-23-5	28vi	-	6g	Nsc
D02B	-	LM3420M5-4.2	BM-IC	Li-Ion charge controller, 4.2V±1%	SOT-23-5	28vi	-	6g	Nsc
D03	-	RP173N281A5	LVR-IC	LDO, 2.85V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D03	-	TC53C3002ECT	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
D030	-	RP200Q302D	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D031	-	RP200Q312D	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D032	-	RP200Q322D	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D033	-	RP200Q332D	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D034	-	RP200Q342D	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D035	-	RP200Q352D	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D036	-	RP200Q362D	LVR-IC	LDO, 3.6V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D037	-	RP200Q372D	LVR-IC	LDO, 3.7V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D038	-	RP200Q382D	LVR-IC	LDO, 3.8V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D039	-	RP200Q392D	LVR-IC	LDO, 3.9V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D03A	-	LM3420AM5-8.4	BM-IC	Li-Ion charge controller, 8.4V±0.5%	SOT-23-5	28vi	-	6g	Nsc
D03B	-	LM3420M5-8.4	BM-IC	Li-Ion charge controller, 8.4V±1%	SOT-23-5	28vi	-	6g	Nsc
D040	-	RP200Q402D	LVR-IC	LDO, 4.0V±1.0%, 300mA, +CE, CL, AE(mode)	SC-88A	28xx	VR10	6ma	Ric
D04A	-	LM3420AM5-12.6	BM-IC	Li-Ion charge controller, 12.6V±0.5%	SOT-23-5	28vi	-	6g	Nsc
D04B	-	LM3420M5-12.6	BM-IC	Li-Ion charge controller, 12.6V±1%	SOT-23-5	28vi	-	6g	Nsc
D05A	-	LM3420AM5-16.8	BM-IC	Li-Ion charge controller, 16.8V±0.5%	SOT-23-5	28vi	-	6g	Nsc
D05B	-	LM3420M5-16.8	BM-IC	Li-Ion charge controller, 16.8V±1%	SOT-23-5	28vi	-	6g	Nsc
D06A	-	LM3460M5-1.5	Lin-IC	Controller for GTLp GTL Bus Termination	SOT-23-5	28vi	-	6g	Nsc
D07A	-	LM3420AM5-8.2	BM-IC	Li-Ion charge controller, 8.2V±0.5%	SOT-23-5	28vi	-	6g	Nsc
D07B	-	LM3420M5-8.2	BM-IC	Li-Ion charge controller, 8.2V±1%	SOT-23-5	28vi	-	6g	Nsc
D09A	-	LM3460M5-1.2	Lin-IC	Controller for GTLp GTL Bus Termination	SOT-23-5	28vi	-	6g	Nsc
D0A	-	R3116N071A	Vdet-IC	0.7V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0A	-	XC6108C30AMR	Vdet-IC	3.0V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D0B	-	R3116N081A	Vdet-IC	0.8V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0B	-	XC6108C30BMR	Vdet-IC	3.0V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D0C	-	R3116N091A	Vdet-IC	0.9V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0C	-	XC6108C30CMR	Vdet-IC	3.0V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
D0D	-	R3116N101A	Vdet-IC	1.0V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0D	-	XC6108C30DMR	Vdet-IC	3.0V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D0E	-	R3116N111A	Vdet-IC	1.1V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0F	-	R3116N121A	Vdet-IC	1.2V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0G	-	R3116N131A	Vdet-IC	1.3V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0H	-	R3116N141A	Vdet-IC	1.4V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0J	-	R3116N151A	Vdet-IC	1.5V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0K	-	R3116N161A	Vdet-IC	1.6V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0L	-	R3116N171A	Vdet-IC	1.7V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0M	-	R3116N181A	Vdet-IC	1.8V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0N	-	R3116N191A	Vdet-IC	1.9V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0P	-	R3116N201A	Vdet-IC	2.0V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0Q	-	R3116N211A	Vdet-IC	2.1V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0R	-	R3116N221A	Vdet-IC	2.2V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0S	-	R3116N231A	Vdet-IC	2.3V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0T	-	R3116N241A	Vdet-IC	2.4V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0U	-	R3116N251A	Vdet-IC	2.5V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0V	-	R3116N261A	Vdet-IC	2.6V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0W	-	R3116N271A	Vdet-IC	2.7V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0X	-	R3116N281A	Vdet-IC	2.8V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0Y	-	R3116N291A	Vdet-IC	2.9V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
D0Z	-	R3116N301A	Vdet-IC	3V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
d1	-	BD45E481G-M	Vdet-IC	4.8V±1%, -MR, -Reset ODO, Td=100ms	SSOP-5	28vdp	VD4	6c	Rhm
D1	-	AP131-42TW	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
D1	-	AP131-42W	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
D1	-	Si91842DT-25	LVR-IC	LDO, LN, 2.5V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
D1	-	TC1055-2.5VCT713	LVR-IC	LDO, 2.5V±2%, 100mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
D1	ea	RN5VD31AA	Vdet-IC	3.1V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1	eu	BL8555-21NQ	LVR-IC	LDO, 2.1V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D1	eu	BL8555-21NRA	LVR-IC	LDO, 2.1V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D1	eu	BL8555-21NRB	LVR-IC	LDO, 2.1V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D1	eu	LR8555-21NQ	LVR-IC	LDO, 2.1V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D1	eu	LR8555-21NRA	LVR-IC	LDO, 2.1V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D1	eu	LR8555-21NRB	LVR-IC	LDO, 2.1V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D1	fg	BL8555-31NQ	LVR-IC	LDO, 3.1V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D1	fg	BL8555-31NRA	LVR-IC	LDO, 3.1V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D1	fg	BL8555-31NRB	LVR-IC	LDO, 3.1V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D1	fg	LR8555-31NQ	LVR-IC	LDO, 3.1V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D1	fg	LR8555-31NRA	LVR-IC	LDO, 3.1V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D1	fg	LR8555-31NRB	LVR-IC	LDO, 3.1V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D1	fh	BL8555-41NQ	LVR-IC	LDO, 4.1V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D1	fh	BL8555-41NRA	LVR-IC	LDO, 4.1V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D1	fh	BL8555-41NRB	LVR-IC	LDO, 4.1V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D1	fh	LR8555-41NQ	LVR-IC	LDO, 4.1V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D1	fh	LR8555-41NRA	LVR-IC	LDO, 4.1V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D1	fh	LR8555-41NRB	LVR-IC	LDO, 4.1V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D1	fk	BL8555-31DQ	LVR-IC	LDO, 3.1V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D1	fk	BL8555-31DRA	LVR-IC	LDO, 3.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D1	fk	BL8555-31DRB	LVR-IC	LDO, 3.1V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D1	fk	LR8555-31DQ	LVR-IC	LDO, 3.1V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D1	fk	LR8555-31DRA	LVR-IC	LDO, 3.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D1	fk	LR8555-31DRB	LVR-IC	LDO, 3.1V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D1	fm	BL8555-41DQ	LVR-IC	LDO, 4.1V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D1	fm	BL8555-41DRA	LVR-IC	LDO, 4.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D1	fm	BL8555-41DRB	LVR-IC	LDO, 4.1V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D1	fm	LR8555-41DQ	LVR-IC	LDO, 4.1V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D1	fm	LR8555-41DRA	LVR-IC	LDO, 4.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D1	fm	LR8555-41DRB	LVR-IC	LDO, 4.1V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D1	fp	BL8555-21DQ	LVR-IC	LDO, 2.1V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D1	fp	BL8555-21DRA	LVR-IC	LDO, 2.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D1	fp	BL8555-21DRB	LVR-IC	LDO, 2.1V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D1	fp	LR8555-21DQ	LVR-IC	LDO, 2.1V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D1	fp	LR8555-21DRA	LVR-IC	LDO, 2.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D1	fp	LR8555-21DRB	LVR-IC	LDO, 2.1V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D10B	-	LM3620M5-4	BM-IC	Li-Ion charge controller, 4.1/4.2V±1.5%, 1-cell	SOT-23-5	28vce	-	6g	Nsc
D11	-	AIC1746-11GJ5	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
D110	ek	XC6365D101MR	DC-DC-IC	PWM st-down, 100kHz, Adj. 1.5..6V±2.5%, 1A, +CE, soft start	SOT-25	28zn	DC18	6g	Tor
D11B	-	LM3620M5-8	BM-IC	Li-Ion charge controller, 4.1/4.2V±1.5%, 2-cell	SOT-23-5	28vce	-	6g	Nsc
D12	-	AIC1746-12GJ5	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
D12	-	R1180N121C	LVR-IC	LDO, 1.2V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D12	-	RP173N121A	LVR-IC	LDO, 1.2V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D13	-	AIC1746-13GJ5	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SC-70-5	28vrx	VR7	6a	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D13	-	R1180N131C	LVR-IC	LDO, 1.3V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D13	-	RP173N131A	LVR-IC	LDO, 1.3V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D13	-	TC53C3102ECT	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
D14	-	R1180N141C	LVR-IC	LDO, 1.4V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D14	-	RP173N141A	LVR-IC	LDO, 1.4V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D15	-	AIC1746-15GJ5	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
D15	-	R1180N151C	LVR-IC	LDO, 1.5V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D15	-	RP173N151A	LVR-IC	LDO, 1.5V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D16	-	R1180N161C	LVR-IC	LDO, 1.6V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D16	-	RP173N161A	LVR-IC	LDO, 1.6V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D17	-	RP173N171A	LVR-IC	LDO, 1.7V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D18	-	AIC1746-18GJ5	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
D18	-	RP173N181A	LVR-IC	LDO, 1.8V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D19	-	RP173N191A	LVR-IC	LDO, 1.9V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D1A	-	R3116N071C	Vdet-IC	0.7V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1A	-	XC6108C31AMR	Vdet-IC	3.1V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D1B	-	R3116N081C	Vdet-IC	0.8V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1B	-	XC6108C31BMR	Vdet-IC	3.1V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D1C	-	R3116N091C	Vdet-IC	0.9V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1C	-	XC6108C31CMR	Vdet-IC	3.1V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
D1D	-	R3116N101C	Vdet-IC	1.0V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1D	-	XC6108C31DMR	Vdet-IC	3.1V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
D1E	-	R3116N111C	Vdet-IC	1.1V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1F	-	R3116N121C	Vdet-IC	1.2V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1G	-	R3116N131C	Vdet-IC	1.3V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1H	-	R3116N141C	Vdet-IC	1.4V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1J	-	R3116N151C	Vdet-IC	1.5V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1K	-	R3116N161C	Vdet-IC	1.6V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1L	-	R3116N171C	Vdet-IC	1.7V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1M	-	R3116N181C	Vdet-IC	1.8V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1N	-	R3116N191C	Vdet-IC	1.9V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1P	-	R3116N201C	Vdet-IC	2.0V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1Q	-	R3116N211C	Vdet-IC	2.1V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1R	-	R3116N221C	Vdet-IC	2.2V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1S	-	R3116N231C	Vdet-IC	2.3V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1T	-	R3116N241C	Vdet-IC	2.4V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1U	-	R3116N251C	Vdet-IC	2.5V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1V	-	R3116N261C	Vdet-IC	2.6V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1W	-	R3116N271C	Vdet-IC	2.7V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1X	-	R3116N281C	Vdet-IC	2.8V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1Y	-	R3116N291C	Vdet-IC	2.9V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D1Z	-	R3116N301C	Vdet-IC	3V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
d2	-	BD45E232G-M	Vdet-IC	2.3V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
D2	-	AP131-43TW	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
D2	-	AP131-43W	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
D2	-	BL8555-12DQ	LVR-IC	LDO, 1.2V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D2	-	BL8555-12DRA	LVR-IC	LDO, 1.2V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D2	-	BL8555-12DRB	LVR-IC	LDO, 1.2V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D2	-	LR8555-12DQ	LVR-IC	LDO, 1.2V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D2	-	LR8555-12DRA	LVR-IC	LDO, 1.2V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D2	-	LR8555-12DRB	LVR-IC	LDO, 1.2V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D2	-	Si91842DT-26	LVR-IC	LDO, LN, 2.6V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
D2	-	TC1055-2.7VCT713	LVR-IC	LDO, 2.7V±2%, 100mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
D2	ea	BL8555-12NQ	LVR-IC	LDO, 1.2V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D2	ea	BL8555-12NRA	LVR-IC	LDO, 1.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D2	ea	BL8555-12NRB	LVR-IC	LDO, 1.2V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D2	ea	LR8555-12NQ	LVR-IC	LDO, 1.2V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D2	ea	LR8555-12NRA	LVR-IC	LDO, 1.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D2	ea	LR8555-12NRB	LVR-IC	LDO, 1.2V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D2	ea	RN5VD32AA	Vdet-IC	3.2V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D2	eu	BL8555-22NQ	LVR-IC	LDO, 2.2V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D2	eu	BL8555-22NRA	LVR-IC	LDO, 2.2V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D2	eu	BL8555-22NRB	LVR-IC	LDO, 2.2V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D2	eu	LR8555-22NQ	LVR-IC	LDO, 2.2V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D2	eu	LR8555-22NRA	LVR-IC	LDO, 2.2V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D2	eu	LR8555-22NRB	LVR-IC	LDO, 2.2V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D2	fg	BL8555-32NQ	LVR-IC	LDO, 3.2V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D2	fg	BL8555-32NRA	LVR-IC	LDO, 3.2V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D2	fg	BL8555-32NRB	LVR-IC	LDO, 3.2V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D2	fg	LR8555-32NQ	LVR-IC	LDO, 3.2V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2	fg	LR8555-32NRA	LVR-IC	LDO, 3.2V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D2	fg	LR8555-32NRB	LVR-IC	LDO, 3.2V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D2	fh	BL8555-42NQ	LVR-IC	LDO, 4.2V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D2	fh	BL8555-42NRA	LVR-IC	LDO, 4.2V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D2	fh	BL8555-42NRB	LVR-IC	LDO, 4.2V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D2	fh	LR8555-42NQ	LVR-IC	LDO, 4.2V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D2	fh	LR8555-42NRA	LVR-IC	LDO, 4.2V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D2	fh	LR8555-42NRB	LVR-IC	LDO, 4.2V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D2	fk	BL8555-32DQ	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D2	fk	BL8555-32DRA	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D2	fk	BL8555-32DRB	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D2	fk	LR8555-32DQ	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D2	fk	LR8555-32DRA	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D2	fk	LR8555-32DRB	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D2	fm	BL8555-42DQ	LVR-IC	LDO, 4.2V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D2	fm	BL8555-42DRA	LVR-IC	LDO, 4.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D2	fm	BL8555-42DRB	LVR-IC	LDO, 4.2V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D2	fm	LR8555-42DQ	LVR-IC	LDO, 4.2V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D2	fm	LR8555-42DRA	LVR-IC	LDO, 4.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D2	fm	LR8555-42DRB	LVR-IC	LDO, 4.2V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D2	fp	BL8555-22DQ	LVR-IC	LDO, 2.2V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D2	fp	BL8555-22DRA	LVR-IC	LDO, 2.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D2	fp	BL8555-22DRB	LVR-IC	LDO, 2.2V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D2	fp	LR8555-22DQ	LVR-IC	LDO, 2.2V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D2	fp	LR8555-22DRA	LVR-IC	LDO, 2.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D2	fp	LR8555-22DRB	LVR-IC	LDO, 2.2V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D20	-	AIC1746-20GJ5	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
D20	-	R1180N201C	LVR-IC	LDO, 2.0V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D20	-	RP173N201A	LVR-IC	LDO, 2.0V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D21	-	R1180N211C	LVR-IC	LDO, 2.1V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D21	-	RP173N211A	LVR-IC	LDO, 2.1V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D210	ek	XC6365D102MR	DC-DC-IC	PWM st-down, 180kHz, Adj. 1.5..6V±2.5%, 1A, +CE, soft start	SOT-25	28zn	DC18	6g	Tor
D22	-	R1180N221C	LVR-IC	LDO, 2.2V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D22	-	RP173N221A	LVR-IC	LDO, 2.2V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D23	-	R1180N231C	LVR-IC	LDO, 2.3V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D23	-	RP173N231A	LVR-IC	LDO, 2.3V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D23	-	TC53C3202ECT	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
D24	-	R1180N241C	LVR-IC	LDO, 2.4V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D24	-	RP173N241A	LVR-IC	LDO, 2.4V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D25	-	AIC1746-25GJ5	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
D25	-	R1180N251C	LVR-IC	LDO, 2.5V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D25	-	RP173N251A	LVR-IC	LDO, 2.5V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D25B	-	LP3470M5-2.63	Vdet-IC	2.63V±1%, -Reset ODO, -20..+85°C	SOT-23-5	28ui	VD2	6g	Nsc
D25C	-	LP3470IM5-2.63	Vdet-IC	2.63V±1%, -Reset ODO, -40..+85°C	SOT-23-5	28ui	VD2	6g	Nsc
D26	-	R1180N261C	LVR-IC	LDO, 2.6V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D26	-	RP173N261A	LVR-IC	LDO, 2.6V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D26B	-	LP3470M5-2.93	Vdet-IC	2.93V±1%, -Reset ODO, -20..+85°C	SOT-23-5	28ui	VD2	6g	Nsc
D26C	-	LP3470IM5-2.93	Vdet-IC	2.93V±1%, -Reset ODO, -40..+85°C	SOT-23-5	28ui	VD2	6g	Nsc
D27	-	AIC1746-27GJ5	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
D27	-	R1180N171C	LVR-IC	LDO, 1.7V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D27	-	RP173N271A	LVR-IC	LDO, 2.7V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D28	-	R1180N181C	LVR-IC	LDO, 1.8V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D28	-	RP173N281A	LVR-IC	LDO, 2.8V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D28B	-	LP3470M5-3.08	Vdet-IC	3.08V±1%, -Reset ODO, -20..+85°C	SOT-23-5	28ui	VD2	6g	Nsc
D28C	-	LP3470IM5-3.08	Vdet-IC	3.08V±1%, -Reset ODO, -40..+85°C	SOT-23-5	28ui	VD2	6g	Nsc
D29	-	R1180N191C	LVR-IC	LDO, 1.9V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D29	-	RP173N291A	LVR-IC	LDO, 2.9V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D29B	-	LP3470M5-4.00	Vdet-IC	4.0V±1%, -Reset ODO, -20..+85°C	SOT-23-5	28ui	VD2	6g	Nsc
D29C	-	LP3470IM5-4.00	Vdet-IC	4.0V±1%, -Reset ODO, -40..+85°C	SOT-23-5	28ui	VD2	6g	Nsc
D2A	-	XC6108C32AMR	Vdet-IC	3.2V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D2B	-	XC6108C32BMR	Vdet-IC	3.2V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D2C	-	XC6108C32CMR	Vdet-IC	3.2V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
D2D	-	XC6108C32DMR	Vdet-IC	3.2V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
D2J	-	AIC1746-285GJ5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
d3	-	BD45E242G-M	Vdet-IC	2.4V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
D3	-	AP131-44TW	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
D3	-	AP131-44W	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
D3	-	BL8555-13DQ	LVR-IC	LDO, 1.3V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D3	-	BL8555-13DRA	LVR-IC	LDO, 1.3V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D3	-	BL8555-13DRB	LVR-IC	LDO, 1.3V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3	-	LR8555-13DQ	LVR-IC	LDO, 1.3V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D3	-	LR8555-13DRA	LVR-IC	LDO, 1.3V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D3	-	LR8555-13DRB	LVR-IC	LDO, 1.3V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D3	-	Si91842DT-27	LVR-IC	LDO, LN, 2.7V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
D3	-	TC1055-3.0VCT713	LVR-IC	LDO, 3.0V±2%, 100mA, +CE,- Error	SOT-23-5	28w	VR8	6g	Mcc
D3	ea	BL8555-13NQ	LVR-IC	LDO, 1.3V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D3	ea	BL8555-13NRA	LVR-IC	LDO, 1.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D3	ea	BL8555-13NRB	LVR-IC	LDO, 1.3V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D3	ea	LR8555-13NQ	LVR-IC	LDO, 1.3V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D3	ea	LR8555-13NRA	LVR-IC	LDO, 1.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D3	ea	LR8555-13NRB	LVR-IC	LDO, 1.3V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D3	ea	RN5VD33AA	Vdet-IC	3.3V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D3	eu	BL8555-23NQ	LVR-IC	LDO, 2.3V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D3	eu	BL8555-23NRA	LVR-IC	LDO, 2.3V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D3	eu	BL8555-23NRB	LVR-IC	LDO, 2.3V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D3	eu	LR8555-23NQ	LVR-IC	LDO, 2.3V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D3	eu	LR8555-23NRA	LVR-IC	LDO, 2.3V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D3	eu	LR8555-23NRB	LVR-IC	LDO, 2.3V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D3	fg	BL8555-33NQ	LVR-IC	LDO, 3.3V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D3	fg	BL8555-33NRA	LVR-IC	LDO, 3.3V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D3	fg	BL8555-33NRB	LVR-IC	LDO, 3.3V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D3	fg	LR8555-33NQ	LVR-IC	LDO, 3.3V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D3	fg	LR8555-33NRA	LVR-IC	LDO, 3.3V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D3	fg	LR8555-33NRB	LVR-IC	LDO, 3.3V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D3	fh	BL8555-43NQ	LVR-IC	LDO, 4.3V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D3	fh	BL8555-43NRA	LVR-IC	LDO, 4.3V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D3	fh	BL8555-43NRB	LVR-IC	LDO, 4.3V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D3	fh	LR8555-43NQ	LVR-IC	LDO, 4.3V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D3	fh	LR8555-43NRA	LVR-IC	LDO, 4.3V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D3	fh	LR8555-43NRB	LVR-IC	LDO, 4.3V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D3	fk	BL8555-33DQ	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D3	fk	BL8555-33DRA	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D3	fk	BL8555-33DRB	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D3	fk	LR8555-33DQ	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D3	fk	LR8555-33DRA	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D3	fk	LR8555-33DRB	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D3	fm	BL8555-43DQ	LVR-IC	LDO, 4.3V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D3	fm	BL8555-43DRA	LVR-IC	LDO, 4.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D3	fm	BL8555-43DRB	LVR-IC	LDO, 4.3V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D3	fm	LR8555-43DQ	LVR-IC	LDO, 4.3V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D3	fm	LR8555-43DRA	LVR-IC	LDO, 4.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D3	fm	LR8555-43DRB	LVR-IC	LDO, 4.3V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D3	fp	BL8555-23DQ	LVR-IC	LDO, 2.3V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D3	fp	BL8555-23DRA	LVR-IC	LDO, 2.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D3	fp	BL8555-23DRB	LVR-IC	LDO, 2.3V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D3	fp	LR8555-23DQ	LVR-IC	LDO, 2.3V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D3	fp	LR8555-23DRA	LVR-IC	LDO, 2.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D3	fp	LR8555-23DRB	LVR-IC	LDO, 2.3V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D30	-	AIC1746-30GJ5	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
D30	-	R1180N301C	LVR-IC	LDO, 3.0V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D30	-	RP173N301A	LVR-IC	LDO, 3.0V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D30B	-	LP3470M5-4.38	Vdet-IC	4.38V±1%, -Reset ODO, -20..+85°C	SOT-23-5	28ui	VD2	6g	Nsc
D30C	-	LP3470IM5-4.38	Vdet-IC	4.38V±1%, -Reset ODO, -40..+85°C	SOT-23-5	28ui	VD2	6g	Nsc
D31	-	R1180N311C	LVR-IC	LDO, 3.1V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D31	-	RP173N311A	LVR-IC	LDO, 3.1V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D310	ek	XC6365D103MR	DC-DC-IC	PWM st-down, 300kHz, Adj. 1.5..6V±2.5%, 1A, +CE, soft start	SOT-25	28zn	DC18	6g	Tor
D31B	-	LP3470M5-4.63	Vdet-IC	4.63V±1%, -Reset ODO, -20..+85°C	SOT-23-5	28ui	VD2	6g	Nsc
D31C	-	LP3470IM5-4.63	Vdet-IC	4.63V±1%, -Reset ODO, -40..+85°C	SOT-23-5	28ui	VD2	6g	Nsc
D32	-	R1180N321C	LVR-IC	LDO, 3.2V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D32	-	RP173N321A	LVR-IC	LDO, 3.2V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D33	-	AIC1746-33GJ5	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
D33	-	R1180N331C	LVR-IC	LDO, 3.3V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D33	-	RP173N331A	LVR-IC	LDO, 3.3V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D33	-	TC53C3302ECT	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
D34	-	R1180N341C	LVR-IC	LDO, 3.4V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D34	-	RP173N341A	LVR-IC	LDO, 3.4V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D35	-	AIC1746-35GJ5	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
D35	-	R1180N351C	LVR-IC	LDO, 3.5V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D35	-	RP173N351A	LVR-IC	LDO, 3.5V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D36	-	R1180N361C	LVR-IC	LDO, 3.6V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D36	-	RP173N361A	LVR-IC	LDO, 3.6V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D37	-	AIC1746-37GJ5	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
D37	-	R1180N271C	LVR-IC	LDO, 2.7V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D37	-	RP173N371A	LVR-IC	LDO, 3.7V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D37B	-	LP3470M5-3.65	Vdet-IC	3.65V±1%, -Reset ODO, -20..+85°C	SOT-23-5	28ui	VD2	6g	Nsc
D37C	-	LP3470IM5-3.65	Vdet-IC	3.65V±1%, -Reset ODO, -40..+85°C	SOT-23-5	28ui	VD2	6g	Nsc
D38	-	AIC1746-38GJ5	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SC-70-5	28vrx	VR7	6a	Aic
D38	-	R1180N281C	LVR-IC	LDO, 2.8V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D38	-	RP173N381A	LVR-IC	LDO, 3.8V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D39	-	R1180N291C	LVR-IC	LDO, 2.9V±2%, 150mA	SOT-23-5	28ym	VR1	6g	Ric
D39	-	RP173N391A	LVR-IC	LDO, 3.9V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D3A	-	XC6108C33AMR	Vdet-IC	3.3V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D3B	-	XC6108C33BMR	Vdet-IC	3.3V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D3C	-	XC6108C33CMR	Vdet-IC	3.3V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
D3D	-	XC6108C33DMR	Vdet-IC	3.3V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
d4	-	BD45E252G-M	Vdet-IC	2.5V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
D4	-	AP131-45TW	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
D4	-	AP131-45W	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
D4	-	BL8555-14DQ	LVR-IC	LDO, 1.4V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D4	-	BL8555-14DRA	LVR-IC	LDO, 1.4V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D4	-	BL8555-14DRB	LVR-IC	LDO, 1.4V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D4	-	LR8555-14DQ	LVR-IC	LDO, 1.4V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D4	-	LR8555-14DRA	LVR-IC	LDO, 1.4V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D4	-	LR8555-14DRB	LVR-IC	LDO, 1.4V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D4	-	Si91842DT-28	LVR-IC	LDO, LN, 2.8V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
D4	-	TC1055-3.3VCT713	LVR-IC	LDO, 3.3V±2%, 100mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
D4	ea	BL8555-14NQ	LVR-IC	LDO, 1.4V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D4	ea	BL8555-14NRA	LVR-IC	LDO, 1.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D4	ea	BL8555-14NRB	LVR-IC	LDO, 1.4V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D4	ea	LR8555-14NQ	LVR-IC	LDO, 1.4V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D4	ea	LR8555-14NRA	LVR-IC	LDO, 1.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D4	ea	LR8555-14NRB	LVR-IC	LDO, 1.4V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D4	ea	RN5VD34AA	Vdet-IC	3.4V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D4	eu	BL8555-24NQ	LVR-IC	LDO, 2.4V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D4	eu	BL8555-24NRA	LVR-IC	LDO, 2.4V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D4	eu	BL8555-24NRB	LVR-IC	LDO, 2.4V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D4	eu	LR8555-24NQ	LVR-IC	LDO, 2.4V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D4	eu	LR8555-24NRA	LVR-IC	LDO, 2.4V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D4	eu	LR8555-24NRB	LVR-IC	LDO, 2.4V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D4	fg	BL8555-34NQ	LVR-IC	LDO, 3.4V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D4	fg	BL8555-34NRA	LVR-IC	LDO, 3.4V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D4	fg	BL8555-34NRB	LVR-IC	LDO, 3.4V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D4	fg	LR8555-34NQ	LVR-IC	LDO, 3.4V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D4	fg	LR8555-34NRA	LVR-IC	LDO, 3.4V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D4	fg	LR8555-34NRB	LVR-IC	LDO, 3.4V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D4	fh	BL8555-44NQ	LVR-IC	LDO, 4.4V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D4	fh	BL8555-44NRA	LVR-IC	LDO, 4.4V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D4	fh	BL8555-44NRB	LVR-IC	LDO, 4.4V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D4	fh	LR8555-44NQ	LVR-IC	LDO, 4.4V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D4	fh	LR8555-44NRA	LVR-IC	LDO, 4.4V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D4	fh	LR8555-44NRB	LVR-IC	LDO, 4.4V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D4	fk	BL8555-34DQ	LVR-IC	LDO, 3.4V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D4	fk	BL8555-34DRB	LVR-IC	LDO, 3.4V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D4	fk	BL8555-34PDA	LVR-IC	LDO, 3.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D4	fk	LR8555-34DQ	LVR-IC	LDO, 3.4V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D4	fk	LR8555-34DRB	LVR-IC	LDO, 3.4V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D4	fk	LR8555-34PDA	LVR-IC	LDO, 3.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D4	fm	BL8555-44DQ	LVR-IC	LDO, 4.4V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D4	fm	BL8555-44DRA	LVR-IC	LDO, 4.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D4	fm	BL8555-44DRB	LVR-IC	LDO, 4.4V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D4	fm	LR8555-44DQ	LVR-IC	LDO, 4.4V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D4	fm	LR8555-44DRA	LVR-IC	LDO, 4.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D4	fm	LR8555-44DRB	LVR-IC	LDO, 4.4V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D4	fp	BL8555-24DQ	LVR-IC	LDO, 2.4V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D4	fp	BL8555-24DRA	LVR-IC	LDO, 2.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D4	fp	BL8555-24DRB	LVR-IC	LDO, 2.4V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D4	fp	LR8555-24DQ	LVR-IC	LDO, 2.4V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D4	fp	LR8555-24DRA	LVR-IC	LDO, 2.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D4	fp	LR8555-24DRB	LVR-IC	LDO, 2.4V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D40	-	RP173N401A	LVR-IC	LDO, 4.0V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D41	-	RP173N411A	LVR-IC	LDO, 4.1V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D410	ek	XC6365D105MR	DC-DC-IC	PWM st-down, 500kHz, Adj. 1.5..6V±2.5%, 1A, +CE, soft start	SOT-25	28zn	DC18	6g	Tor
D42	-	RP173N421A	LVR-IC	LDO, 4.2V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D43	-	RP173N431A	LVR-IC	LDO, 4.3V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D43	-	TC53C3402ECT	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
D44	-	RP173N441A	LVR-IC	LDO, 4.4V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D45	-	RP173N451A	LVR-IC	LDO, 4.5V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D46	-	RP173N461A	LVR-IC	LDO, 4.6V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D47	-	RP173N471A	LVR-IC	LDO, 4.7V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D48	-	RP173N481A	LVR-IC	LDO, 4.8V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D49	-	RP173N491A	LVR-IC	LDO, 4.9V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D4A	-	XC6108C34AMR	Vdet-IC	3.4V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D4B	-	XC6108C34BMR	Vdet-IC	3.4V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D4C	-	XC6108C34CMR	Vdet-IC	3.4V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
D4D	-	XC6108C34DMR	Vdet-IC	3.4V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
d5	-	BD45E262G-M	Vdet-IC	2.6V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
D5	-	AP131-46TW	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
D5	-	AP131-46W	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
D5	-	BL8555-15DQ	LVR-IC	LDO, 1.5V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D5	-	BL8555-15DRA	LVR-IC	LDO, 1.5V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D5	-	BL8555-15DRB	LVR-IC	LDO, 1.5V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D5	-	LR8555-15DQ	LVR-IC	LDO, 1.5V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D5	-	LR8555-15DRA	LVR-IC	LDO, 1.5V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D5	-	LR8555-15DRB	LVR-IC	LDO, 1.5V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D5	-	Si91842DT-285	LVR-IC	LDO, LN, 2.85V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
D5	ea	BL8555-15NQ	LVR-IC	LDO, 1.5V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D5	ea	BL8555-15NRA	LVR-IC	LDO, 1.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D5	ea	BL8555-15NRB	LVR-IC	LDO, 1.5V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D5	ea	LR8555-15NQ	LVR-IC	LDO, 1.5V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D5	ea	LR8555-15NRA	LVR-IC	LDO, 1.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D5	ea	LR8555-15NRB	LVR-IC	LDO, 1.5V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D5	ea	RN5VD35AA	Vdet-IC	3.5V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D5	eu	BL8555-25NQ	LVR-IC	LDO, 2.5V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D5	eu	BL8555-25NRA	LVR-IC	LDO, 2.5V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D5	eu	BL8555-25NRB	LVR-IC	LDO, 2.5V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D5	eu	LR8555-25NQ	LVR-IC	LDO, 2.5V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D5	eu	LR8555-25NRA	LVR-IC	LDO, 2.5V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D5	eu	LR8555-25NRB	LVR-IC	LDO, 2.5V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D5	fg	BL8555-35NQ	LVR-IC	LDO, 3.5V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D5	fg	BL8555-35NRA	LVR-IC	LDO, 3.5V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D5	fg	BL8555-35NRB	LVR-IC	LDO, 3.5V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D5	fg	LR8555-35NQ	LVR-IC	LDO, 3.5V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D5	fg	LR8555-35NRA	LVR-IC	LDO, 3.5V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D5	fg	LR8555-35NRB	LVR-IC	LDO, 3.5V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D5	fh	BL8555-45NQ	LVR-IC	LDO, 4.5V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D5	fh	BL8555-45NRA	LVR-IC	LDO, 4.5V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D5	fh	BL8555-45NRB	LVR-IC	LDO, 4.5V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D5	fh	LR8555-45NQ	LVR-IC	LDO, 4.5V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D5	fh	LR8555-45NRA	LVR-IC	LDO, 4.5V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D5	fh	LR8555-45NRB	LVR-IC	LDO, 4.5V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D5	fk	BL8555-35DQ	LVR-IC	LDO, 3.5V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D5	fk	BL8555-35DRA	LVR-IC	LDO, 3.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D5	fk	BL8555-35DRB	LVR-IC	LDO, 3.5V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D5	fk	LR8555-35DQ	LVR-IC	LDO, 3.5V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D5	fk	LR8555-35DRA	LVR-IC	LDO, 3.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D5	fk	LR8555-35DRB	LVR-IC	LDO, 3.5V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D5	fm	BL8555-45DQ	LVR-IC	LDO, 4.5V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D5	fm	BL8555-45DRA	LVR-IC	LDO, 4.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D5	fm	BL8555-45DRB	LVR-IC	LDO, 4.5V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D5	fm	LR8555-45DQ	LVR-IC	LDO, 4.5V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D5	fm	LR8555-45DRA	LVR-IC	LDO, 4.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D5	fm	LR8555-45DRB	LVR-IC	LDO, 4.5V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D5	fp	BL8555-25DQ	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D5	fp	BL8555-25DRA	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D5	fp	BL8555-25DRB	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D5	fp	LR8555-25DQ	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D5	fp	LR8555-25DRA	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D5	fp	LR8555-25DRB	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D50	-	RP173N501A	LVR-IC	LDO, 5.0V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D51	-	RP173N511A	LVR-IC	LDO, 5.1V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D52	-	RP173N521A	LVR-IC	LDO, 5.2V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D53	-	OPA353NA	Op-IC	H-Speed, Single-supply, Rail-to-Rail, 2.5..5.5V, 44MHz, 22V/µs	SOT-23-5	28opa	OP1	6a	Bb
D53	-	RP173N531A	LVR-IC	LDO, 5.3V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D53	-	TC53C3502ECT	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
D54	-	RP173N541A	LVR-IC	LDO, 5.4V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D55	-	RP173N551A	LVR-IC	LDO, 5.5V±1%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
D5A	-	XC6108C35AMR	Vdet-IC	3.5V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D5B	-	XC6108C35BMR	Vdet-IC	3.5V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D5C	-	XC6108C35CMR	Vdet-IC	3.5V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
D5D	-	XC6108C35DMR	Vdet-IC	3.5V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
d6	-	BD45E272G-M	Vdet-IC	2.7V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
D6	-	AP131-47TW	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
D6	-	AP131-47W	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
D6	-	BL8555-16DQ	LVR-IC	LDO, 1.6V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D6	-	BL8555-16DRA	LVR-IC	LDO, 1.6V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D6	-	BL8555-16DRB	LVR-IC	LDO, 1.6V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D6	-	LR8555-16DQ	LVR-IC	LDO, 1.6V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D6	-	LR8555-16DRA	LVR-IC	LDO, 1.6V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D6	-	LR8555-16DRB	LVR-IC	LDO, 1.6V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D6	-	Si91842DT-29	LVR-IC	LDO, LN, 2.9V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
D6	-	TC1055-5.0VCT713	LVR-IC	LDO, 5.0V±2%, 100mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
D6	ea	BL8555-16NQ	LVR-IC	LDO, 1.6V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D6	ea	BL8555-16NRA	LVR-IC	LDO, 1.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D6	ea	BL8555-16NRB	LVR-IC	LDO, 1.6V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D6	ea	LR8555-16NQ	LVR-IC	LDO, 1.6V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D6	ea	LR8555-16NRA	LVR-IC	LDO, 1.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D6	ea	LR8555-16NRB	LVR-IC	LDO, 1.6V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D6	ea	RN5VD36AA	Vdet-IC	3.6V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D6	eu	BL8555-26NQ	LVR-IC	LDO, 2.6V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D6	eu	BL8555-26NRA	LVR-IC	LDO, 2.6V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D6	eu	BL8555-26NRB	LVR-IC	LDO, 2.6V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D6	eu	LR8555-26NQ	LVR-IC	LDO, 2.6V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D6	eu	LR8555-26NRA	LVR-IC	LDO, 2.6V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D6	eu	LR8555-26NRB	LVR-IC	LDO, 2.6V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D6	fg	BL8555-36NQ	LVR-IC	LDO, 3.6V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D6	fg	BL8555-36NRA	LVR-IC	LDO, 3.6V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D6	fg	BL8555-36NRB	LVR-IC	LDO, 3.6V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D6	fg	LR8555-36NQ	LVR-IC	LDO, 3.6V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D6	fg	LR8555-36NRA	LVR-IC	LDO, 3.6V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D6	fg	LR8555-36NRB	LVR-IC	LDO, 3.6V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D6	fh	BL8555-46NQ	LVR-IC	LDO, 4.6V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D6	fh	BL8555-46NRA	LVR-IC	LDO, 4.6V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D6	fh	BL8555-46NRB	LVR-IC	LDO, 4.6V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D6	fh	LR8555-46NQ	LVR-IC	LDO, 4.6V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D6	fh	LR8555-46NRA	LVR-IC	LDO, 4.6V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D6	fh	LR8555-46NRB	LVR-IC	LDO, 4.6V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D6	fk	BL8555-36DQ	LVR-IC	LDO, 3.6V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D6	fk	BL8555-36DRA	LVR-IC	LDO, 3.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D6	fk	BL8555-36DRB	LVR-IC	LDO, 3.6V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D6	fk	LR8555-36DQ	LVR-IC	LDO, 3.6V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D6	fk	LR8555-36DRA	LVR-IC	LDO, 3.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D6	fk	LR8555-36DRB	LVR-IC	LDO, 3.6V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D6	fm	BL8555-46DQ	LVR-IC	LDO, 4.6V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D6	fm	BL8555-46DRA	LVR-IC	LDO, 4.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D6	fm	BL8555-46DRB	LVR-IC	LDO, 4.6V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D6	fm	LR8555-46DQ	LVR-IC	LDO, 4.6V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D6	fm	LR8555-46DRA	LVR-IC	LDO, 4.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D6	fm	LR8555-46DRB	LVR-IC	LDO, 4.6V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D6	fp	BL8555-26DQ	LVR-IC	LDO, 2.6V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D6	fp	BL8555-26DRA	LVR-IC	LDO, 2.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D6	fp	BL8555-26DRB	LVR-IC	LDO, 2.6V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D6	fp	LR8555-26DQ	LVR-IC	LDO, 2.6V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D6	fp	LR8555-26DRA	LVR-IC	LDO, 2.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D6	fp	LR8555-26DRB	LVR-IC	LDO, 2.6V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D63	-	TC53C3602ECT	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
D6A	-	XC6108C36AMR	Vdet-IC	3.6V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D6B	-	XC6108C36BMR	Vdet-IC	3.6V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D6C	-	XC6108C36CMR	Vdet-IC	3.6V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
D6D	-	XC6108C36DMR	Vdet-IC	3.6V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
d7	-	BD45E282G-M	Vdet-IC	2.8V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D7	-	AP131-48TW	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
D7	-	AP131-48W	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
D7	-	BL8555-17DQ	LVR-IC	LDO, 1.7V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D7	-	BL8555-17DRA	LVR-IC	LDO, 1.7V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D7	-	BL8555-17DRB	LVR-IC	LDO, 1.7V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D7	-	LR8555-17DQ	LVR-IC	LDO, 1.7V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D7	-	LR8555-17DRA	LVR-IC	LDO, 1.7V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D7	-	LR8555-17DRB	LVR-IC	LDO, 1.7V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D7	-	Si91842DT-30	LVR-IC	LDO, LN, 3.0V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
D7	-	SN74LVC1G38DCK	CMOS-Log	2-input NAND gate (ODO)	SC-70-5	28	Log17	6g	Ti
D7	ea	BL8555-17NQ	LVR-IC	LDO, 1.7V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D7	ea	BL8555-17NRA	LVR-IC	LDO, 1.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D7	ea	BL8555-17NRB	LVR-IC	LDO, 1.7V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D7	ea	LR8555-17NQ	LVR-IC	LDO, 1.7V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D7	ea	LR8555-17NRA	LVR-IC	LDO, 1.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D7	ea	LR8555-17NRB	LVR-IC	LDO, 1.7V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D7	ea	RN5VD37AA	Vdet-IC	3.7V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D7	eu	BL8555-27NQ	LVR-IC	LDO, 2.7V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D7	eu	BL8555-27NRA	LVR-IC	LDO, 2.7V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D7	eu	BL8555-27NRB	LVR-IC	LDO, 2.7V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D7	eu	LR8555-27NQ	LVR-IC	LDO, 2.7V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D7	eu	LR8555-27NRA	LVR-IC	LDO, 2.7V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D7	eu	LR8555-27NRB	LVR-IC	LDO, 2.7V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D7	fg	BL8555-37NQ	LVR-IC	LDO, 3.7V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D7	fg	BL8555-37NRA	LVR-IC	LDO, 3.7V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D7	fg	BL8555-37NRB	LVR-IC	LDO, 3.7V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D7	fg	LR8555-37NQ	LVR-IC	LDO, 3.7V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D7	fg	LR8555-37NRA	LVR-IC	LDO, 3.7V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D7	fg	LR8555-37NRB	LVR-IC	LDO, 3.7V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D7	fh	BL8555-47NQ	LVR-IC	LDO, 4.7V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D7	fh	BL8555-47NRA	LVR-IC	LDO, 4.7V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D7	fh	BL8555-47NRB	LVR-IC	LDO, 4.7V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D7	fh	LR8555-47NQ	LVR-IC	LDO, 4.7V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D7	fh	LR8555-47NRA	LVR-IC	LDO, 4.7V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D7	fh	LR8555-47NRB	LVR-IC	LDO, 4.7V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D7	fk	BL8555-37DQ	LVR-IC	LDO, 3.7V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D7	fk	BL8555-37DRA	LVR-IC	LDO, 3.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D7	fk	BL8555-37DRB	LVR-IC	LDO, 3.7V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D7	fk	LR8555-37DQ	LVR-IC	LDO, 3.7V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D7	fk	LR8555-37DRA	LVR-IC	LDO, 3.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D7	fk	LR8555-37DRB	LVR-IC	LDO, 3.7V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D7	fm	BL8555-47DQ	LVR-IC	LDO, 4.7V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D7	fm	BL8555-47DRA	LVR-IC	LDO, 4.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D7	fm	BL8555-47DRB	LVR-IC	LDO, 4.7V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D7	fm	LR8555-47DQ	LVR-IC	LDO, 4.7V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D7	fm	LR8555-47DRA	LVR-IC	LDO, 4.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D7	fm	LR8555-47DRB	LVR-IC	LDO, 4.7V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D7	fp	BL8555-27DQ	LVR-IC	LDO, 2.7V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D7	fp	BL8555-27DRA	LVR-IC	LDO, 2.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D7	fp	BL8555-27DRB	LVR-IC	LDO, 2.7V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D7	fp	LR8555-27DQ	LVR-IC	LDO, 2.7V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D7	fp	LR8555-27DRA	LVR-IC	LDO, 2.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D7	fp	LR8555-27DRB	LVR-IC	LDO, 2.7V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D73	-	TC53C3702ECT	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
D7A	-	XC6108C37AMR	Vdet-IC	3.7V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D7B	-	XC6108C37BMR	Vdet-IC	3.7V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D7C	-	XC6108C37CMR	Vdet-IC	3.7V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
D7D	-	XC6108C37DMR	Vdet-IC	3.7V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
d8	-	BD45E292G-M	Vdet-IC	2.9V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
D8	-	AP131-49TW	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
D8	-	AP131-49W	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
D8	-	BL8555-18DQ	LVR-IC	LDO, 1.8V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D8	-	BL8555-18DRA	LVR-IC	LDO, 1.8V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D8	-	BL8555-18DRB	LVR-IC	LDO, 1.8V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D8	-	LR8555-18DQ	LVR-IC	LDO, 1.8V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D8	-	LR8555-18DRA	LVR-IC	LDO, 1.8V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D8	-	LR8555-18DRB	LVR-IC	LDO, 1.8V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D8	-	Si91842DT-33	LVR-IC	LDO, LN, 3.3V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
D8	-	TC1055-2.85VCT713	LVR-IC	LDO, 2.85V±2%, 100mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
D8	ea	BL8555-18NQ	LVR-IC	LDO, 1.8V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D8	ea	BL8555-18NRA	LVR-IC	LDO, 1.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D8	ea	BL8555-18NRB	LVR-IC	LDO, 1.8V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D8	ea	LR8555-18NQ	LVR-IC	LDO, 1.8V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D8	ea	LR8555-18NRA	LVR-IC	LDO, 1.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D8	ea	LR8555-18NRB	LVR-IC	LDO, 1.8V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D8	ea	RN5VD38AA	Vdet-IC	3.8V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D8	eu	BL8555-28NQ	LVR-IC	LDO, 2.8V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D8	eu	BL8555-28NRA	LVR-IC	LDO, 2.8V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D8	eu	BL8555-28NRB	LVR-IC	LDO, 2.8V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D8	eu	LR8555-28NQ	LVR-IC	LDO, 2.8V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D8	eu	LR8555-28NRA	LVR-IC	LDO, 2.8V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D8	eu	LR8555-28NRB	LVR-IC	LDO, 2.8V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D8	fg	BL8555-38NQ	LVR-IC	LDO, 3.8V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D8	fg	BL8555-38NRA	LVR-IC	LDO, 3.8V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D8	fg	BL8555-38NRB	LVR-IC	LDO, 3.8V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D8	fg	LR8555-38NQ	LVR-IC	LDO, 3.8V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D8	fg	LR8555-38NRA	LVR-IC	LDO, 3.8V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D8	fg	LR8555-38NRB	LVR-IC	LDO, 3.8V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D8	fh	BL8555-48NQ	LVR-IC	LDO, 4.8V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D8	fh	BL8555-48NRA	LVR-IC	LDO, 4.8V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D8	fh	BL8555-48NRB	LVR-IC	LDO, 4.8V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D8	fh	LR8555-48NQ	LVR-IC	LDO, 4.8V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D8	fh	LR8555-48NRA	LVR-IC	LDO, 4.8V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D8	fh	LR8555-48NRB	LVR-IC	LDO, 4.8V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D8	fk	BL8555-38DQ	LVR-IC	LDO, 3.8V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D8	fk	BL8555-38DRA	LVR-IC	LDO, 3.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D8	fk	BL8555-38DRB	LVR-IC	LDO, 3.8V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D8	fk	LR8555-38DQ	LVR-IC	LDO, 3.8V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D8	fk	LR8555-38DRA	LVR-IC	LDO, 3.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D8	fk	LR8555-38DRB	LVR-IC	LDO, 3.8V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D8	fm	BL8555-48DQ	LVR-IC	LDO, 4.8V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D8	fm	BL8555-48DRA	LVR-IC	LDO, 4.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D8	fm	BL8555-48DRB	LVR-IC	LDO, 4.8V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D8	fm	LR8555-48DQ	LVR-IC	LDO, 4.8V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D8	fm	LR8555-48DRA	LVR-IC	LDO, 4.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D8	fm	LR8555-48DRB	LVR-IC	LDO, 4.8V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D8	fp	BL8555-28DQ	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D8	fp	BL8555-28DRA	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D8	fp	BL8555-28DRB	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D8	fp	LR8555-28DQ	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D8	fp	LR8555-28DRA	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D8	fp	LR8555-28DRB	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D83	-	TC53C3802ECT	Vdet-IC	3.8V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
D8A	-	XC6108C38AMR	Vdet-IC	3.8V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D8B	-	XC6108C38BMR	Vdet-IC	3.8V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D8C	-	XC6108C38CMR	Vdet-IC	3.8V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
D8D	-	XC6108C38DMR	Vdet-IC	3.8V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
d9	-	BD45E302G-M	Vdet-IC	3.0V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
D9	-	AP131-50TW	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
D9	-	AP131-50W	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
D9	-	BL8555-19DQ	LVR-IC	LDO, 1.9V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D9	-	BL8555-19DRA	LVR-IC	LDO, 1.9V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D9	-	BL8555-19DRB	LVR-IC	LDO, 1.9V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D9	-	LR8555-19DQ	LVR-IC	LDO, 1.9V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D9	-	LR8555-19DRA	LVR-IC	LDO, 1.9V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D9	-	LR8555-19DRB	LVR-IC	LDO, 1.9V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D9	-	Si91842DT-35	LVR-IC	LDO, LN, 3.5V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
D9	-	TC1055-3.6VCT713	LVR-IC	LDO, 3.6V±2%, 100mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
D9	ea	BL8555-19NQ	LVR-IC	LDO, 1.9V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D9	ea	BL8555-19NRA	LVR-IC	LDO, 1.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D9	ea	BL8555-19NRB	LVR-IC	LDO, 1.9V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D9	ea	LR8555-19NQ	LVR-IC	LDO, 1.9V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D9	ea	LR8555-19NRA	LVR-IC	LDO, 1.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D9	ea	LR8555-19NRB	LVR-IC	LDO, 1.9V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D9	ea	RN5VD39AA	Vdet-IC	3.9V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
D9	eu	BL8555-29NQ	LVR-IC	LDO, 2.9V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D9	eu	BL8555-29NRA	LVR-IC	LDO, 2.9V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D9	eu	BL8555-29NRB	LVR-IC	LDO, 2.9V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D9	eu	LR8555-29NQ	LVR-IC	LDO, 2.9V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D9	eu	LR8555-29NRA	LVR-IC	LDO, 2.9V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D9	eu	LR8555-29NRB	LVR-IC	LDO, 2.9V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D9	fg	BL8555-39NQ	LVR-IC	LDO, 3.9V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D9	fg	BL8555-39NRA	LVR-IC	LDO, 3.9V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D9	fg	BL8555-39NRB	LVR-IC	LDO, 3.9V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D9	fg	LR8555-39NQ	LVR-IC	LDO, 3.9V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D9	fg	LR8555-39NRA	LVR-IC	LDO, 3.9V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D9	fg	LR8555-39NRB	LVR-IC	LDO, 3.9V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D9	fh	BL8555-49NQ	LVR-IC	LDO, 4.9V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Shb
D9	fh	BL8555-49NRA	LVR-IC	LDO, 4.9V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Shb
D9	fh	BL8555-49NRB	LVR-IC	LDO, 4.9V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Shb
D9	fh	LR8555-49NQ	LVR-IC	LDO, 4.9V±2%, 200mA	SC-70-5	28ym	VR1	6kd	Lrc
D9	fh	LR8555-49NRA	LVR-IC	LDO, 4.9V±2%, 200mA	SOT-23-5	28ym	VR1	6kd	Lrc
D9	fh	LR8555-49NRB	LVR-IC	LDO, 4.9V±2%, 200mA	SOT-23-5	28c5	VR1	6kc	Lrc
D9	fk	BL8555-39DQ	LVR-IC	LDO, 3.9V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D9	fk	BL8555-39DRA	LVR-IC	LDO, 3.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D9	fk	BL8555-39DRB	LVR-IC	LDO, 3.9V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D9	fk	LR8555-39DQ	LVR-IC	LDO, 3.9V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D9	fk	LR8555-39DRA	LVR-IC	LDO, 3.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D9	fk	LR8555-39DRB	LVR-IC	LDO, 3.9V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D9	fm	BL8555-49DQ	LVR-IC	LDO, 4.9V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D9	fm	BL8555-49DRA	LVR-IC	LDO, 4.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D9	fm	BL8555-49DRB	LVR-IC	LDO, 4.9V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D9	fm	LR8555-49DQ	LVR-IC	LDO, 4.9V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D9	fm	LR8555-49DRA	LVR-IC	LDO, 4.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D9	fm	LR8555-49DRB	LVR-IC	LDO, 4.9V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D9	fp	BL8555-29DQ	LVR-IC	LDO, 2.9V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
D9	fp	BL8555-29DRA	LVR-IC	LDO, 2.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
D9	fp	BL8555-29DRB	LVR-IC	LDO, 2.9V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
D9	fp	LR8555-29DQ	LVR-IC	LDO, 2.9V±2%, 200mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
D9	fp	LR8555-29DRA	LVR-IC	LDO, 2.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
D9	fp	LR8555-29DRB	LVR-IC	LDO, 2.9V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
D93	-	TC53C3902ECT	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
D9A	-	XC6108C39AMR	Vdet-IC	3.9V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D9B	-	XC6108C39BMR	Vdet-IC	3.9V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
D9C	-	XC6108C39CMR	Vdet-IC	3.9V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
D9D	-	XC6108C39DMR	Vdet-IC	3.9V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
Da	-	BD49E27G	Vdet-IC	2.7V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
DA	-	µPA502T	n-MOSFET	Dual, 50V, 100mA, 200mW, <25 Ω(10mA), 17/68ns	SOT-23-5	28fb	T19	6a	Nec
DA	-	AP131-15TW	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DA	-	AP131-15W	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DA	-	RN5RT50AA	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
DA	-	V6310ASP5B	Vdet-IC	2.0V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6g	Em
DA-	-	XC62GR3012M	LVR-IC	3.0V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
DA-	eh	XC62GP3012M	LVR-IC	3.0V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
DA+	-	XC62GR3022M	LVR-IC	3.0V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
DA+	eh	XC62GP3022M	LVR-IC	3.0V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
DA0	ej	XC6117A031MR	Vdet-IC	3.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DA1	ej	XC6117A032MR	Vdet-IC	3.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DA2	ej	XC6117A033MR	Vdet-IC	3.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DA3	ej	XC6117A034MR	Vdet-IC	3.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DA4	ej	XC6117A035MR	Vdet-IC	3.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DA5	ej	XC6117A036MR	Vdet-IC	3.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DA6	ej	XC6117A037MR	Vdet-IC	3.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DA7	ej	XC6117A038MR	Vdet-IC	3.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DA8	-	XC9236B08CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DA8	ej	XC6117A039MR	Vdet-IC	3.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DA9	-	XC9236B09CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DA9	ej	XC6117A040MR	Vdet-IC	4.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAA	-	RP201N081B	LVR-IC	LDO, 0.8V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAA	ej	XC6117A041MR	Vdet-IC	4.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAB	-	RP201N091B	LVR-IC	LDO, 0.9V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAB	ej	XC6117A042MR	Vdet-IC	4.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAC	-	RP201N101B	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAC	ej	XC6117A043MR	Vdet-IC	4.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAD	-	RP201N111B	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAD	ej	XC6117A044MR	Vdet-IC	4.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAE	-	RP201N121B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAE	ej	XC6117A045MR	Vdet-IC	4.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAF	-	RP201N131B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAF	ec	XC6117A016MR	Vdet-IC	1.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DAF	ej	XC6117A046MR	Vdet-IC	4.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAG	-	RP201N141B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAH	-	RP201N151B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAH	ec	XC6117A017MR	Vdet-IC	1.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAH	ej	XC6117A047MR	Vdet-IC	4.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAJ	-	RP201N161B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAK	-	RP201N171B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAK	ec	XC6117A018MR	Vdet-IC	1.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAK	ej	XC6117A048MR	Vdet-IC	4.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAL	-	RP201N181B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAL	-	XC9236B0LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DAL	ec	XC6117A019MR	Vdet-IC	1.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAL	ej	XC6117A049MR	Vdet-IC	4.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAM	-	RP201N191B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAM	-	XC9236B0MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DAM	ec	XC6117A020MR	Vdet-IC	2.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAM	ej	XC6117A050MR	Vdet-IC	5.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAN	-	RP201N201B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAN	ec	XC6117A021MR	Vdet-IC	2.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAP	-	RP201N211B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAP	ec	XC6117A022MR	Vdet-IC	2.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAQ	-	RP201N221B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAR	-	RP201N231B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAR	ec	XC6117A023MR	Vdet-IC	2.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAS	-	RP201N241B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAS	ec	XC6117A024MR	Vdet-IC	2.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAT	-	RP201N251B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAT	ec	XC6117A025MR	Vdet-IC	2.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAU	-	RP201N261B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAU	ec	XC6117A026MR	Vdet-IC	2.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAV	-	RP201N271B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAV	ec	XC6117A027MR	Vdet-IC	2.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAW	-	RP201N281B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAX	-	RP201N291B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAX	ec	XC6117A028MR	Vdet-IC	2.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAY	-	RP201N301B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAY	ec	XC6117A029MR	Vdet-IC	2.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
DAZ	-	RP201N311B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DAZ	ec	XC6117A030MR	Vdet-IC	3.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	SOT-25	28xf	VD22	6g	Tor
Db	-	BD49E28G	Vdet-IC	2.8V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
DB	-	μPA572T	n-MOSFET	Dual, 30V, ±100mA, 200mW, <8 Ω(10mA), 15/100ns	SOT-23-5	28	T19	6a	Nec
DB	-	AP131-16TW	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DB	-	AP131-16W	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DB	-	RN5RT51AA	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
DB	-	V6310BSP5B	Vdet-IC	2.4V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6g	Em
DB-	-	XC62GR3112M	LVR-IC	3.1V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
DB-	eh	XC62GP3112M	LVR-IC	3.1V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
DB+	-	XC62GR3122M	LVR-IC	3.1V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
DB+	eh	XC62GP3122M	LVR-IC	3.1V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
DB0	-	XC9236B10CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DB0	ej	XC6117B031MR	Vdet-IC	3.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DB1	-	XC9236B11CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DB1	ej	XC6117B032MR	Vdet-IC	3.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DB2	-	XC9236B12CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DB2	ej	XC6117B033MR	Vdet-IC	3.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DB3	-	XC9236B13CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DB3	ej	XC6117B034MR	Vdet-IC	3.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DB4	-	XC9236B14CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DB4	ej	XC6117B035MR	Vdet-IC	3.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DB5	-	XC9236B15CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DB5	ej	XC6117B036MR	Vdet-IC	3.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DB6	-	XC9236B16CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DB6	ej	XC6117B037MR	Vdet-IC	3.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DB7	-	XC9236B17CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DB7	ej	XC6117B038MR	Vdet-IC	3.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DB8	-	XC9236B18CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DB8	ej	XC6117B039MR	Vdet-IC	3.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DB9	-	XC9236B19CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DB9	ej	XC6117B040MR	Vdet-IC	4.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBA	-	RP201N081D	LVR-IC	LDO, 0.8V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DBA	-	XC9236B1ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DBA	ej	XC6117B041MR	Vdet-IC	4.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBB	-	RP201N091D	LVR-IC	LDO, 0.9V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBB	-	XC9236B1BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DBB	ej	XC6117B042MR	Vdet-IC	4.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBC	-	RP201N101D	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBC	-	XC9236B1CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DBC	ej	XC6117B043MR	Vdet-IC	4.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBD	-	RP201N111D	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBD	-	XC9236B1DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DBD	ej	XC6117B044MR	Vdet-IC	4.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBE	-	RP201N121D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBE	-	XC9236B1ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DBE	ej	XC6117B045MR	Vdet-IC	4.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBF	-	RP201N131D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBF	-	XC9236B1FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DBF	ec	XC6117B016MR	Vdet-IC	1.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBF	ej	XC6117B046MR	Vdet-IC	4.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBG	-	RP201N141D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBH	-	RP201N151D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBH	-	XC9236B1HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DBH	ec	XC6117B017MR	Vdet-IC	1.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBH	ej	XC6117B047MR	Vdet-IC	4.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBJ	-	RP201N161D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBK	-	RP201N171D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBK	-	XC9236B1KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DBK	ec	XC6117B018MR	Vdet-IC	1.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBK	ej	XC6117B048MR	Vdet-IC	4.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBL	-	RP201N181D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBL	-	XC9236B1LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DBL	ec	XC6117B019MR	Vdet-IC	1.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBL	ej	XC6117B049MR	Vdet-IC	4.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBM	-	RP201N191D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBM	-	XC9236B1MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DBM	ec	XC6117B020MR	Vdet-IC	2.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBM	ej	XC6117B050MR	Vdet-IC	5.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBN	-	RP201N201D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBN	ec	XC6117B021MR	Vdet-IC	2.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBP	-	RP201N211D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBP	ec	XC6117B022MR	Vdet-IC	2.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBQ	-	RP201N221D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBR	-	RP201N231D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBR	ec	XC6117B023MR	Vdet-IC	2.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBS	-	RP201N241D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBS	ec	XC6117B024MR	Vdet-IC	2.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBT	-	RP201N251D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBT	ec	XC6117B025MR	Vdet-IC	2.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBU	-	RP201N261D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBU	ec	XC6117B026MR	Vdet-IC	2.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBV	-	RP201N271D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBV	ec	XC6117B027MR	Vdet-IC	2.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBW	-	RP201N281D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBX	-	RP201N291D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBX	ec	XC6117B028MR	Vdet-IC	2.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBY	-	RP201N301D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBY	ec	XC6117B029MR	Vdet-IC	2.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
DBZ	-	RP201N311D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
DBZ	ec	XC6117B030MR	Vdet-IC	3.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	SOT-25	28xf	VD22	6g	Tor
Dc	-	BD49E29G	Vdet-IC	2.9V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
DC	-	AP131-17TW	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DC	-	AP131-17W	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DC	-	RN5RT52AA	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
DC	-	V6310CSP5B	Vdet-IC	2.8V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6g	Em
DC-	-	RT9193-18PB	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
DC-	-	XC62GR3212M	LVR-IC	3.2V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
DC-	eh	XC62GP3212M	LVR-IC	3.2V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
DC+	-	XC62GR3222M	LVR-IC	3.2V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
DC+	eh	XC62GP3222M	LVR-IC	3.2V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
DC=	-	RT9193-18GB	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
DC0	-	XC9236B20CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DC0	ej	XC6117C031MR	Vdet-IC	3.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DC1	-	XC9236B21CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DC1	ej	XC6117C032MR	Vdet-IC	3.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DC2	-	XC9236B22CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DC2	ej	XC6117C033MR	Vdet-IC	3.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DC3	-	XC9236B23CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DC3	ej	XC6117C034MR	Vdet-IC	3.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DC4	-	XC9236B24CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DC4	ej	XC6117C035MR	Vdet-IC	3.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DC5	-	XC9236B25CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DC5	ej	XC6117C036MR	Vdet-IC	3.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DC6	-	XC9236B26CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DC6	ej	XC6117C037MR	Vdet-IC	3.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DC7	-	XC9236B27CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DC7	ej	XC6117C038MR	Vdet-IC	3.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DC8	-	XC9236B28CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DC8	ej	XC6117C039MR	Vdet-IC	3.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DC9	-	XC9236B29CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DC9	ej	XC6117C040MR	Vdet-IC	4.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCA	-	XC9236B2ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DCA	ej	XC6117C041MR	Vdet-IC	4.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCB	-	XC9236B2BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DCB	ej	XC6117C042MR	Vdet-IC	4.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCC	-	XC9236B2CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DCC	ej	XC6117C043MR	Vdet-IC	4.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCD	-	XC9236B2DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DCD	ej	XC6117C044MR	Vdet-IC	4.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCE	-	XC9236B2ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DCE	ej	XC6117C045MR	Vdet-IC	4.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCF	-	XC9236B2FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DCF	ec	XC6117C016MR	Vdet-IC	1.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCF	ej	XC6117C046MR	Vdet-IC	4.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCH	-	XC9236B2HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DCH	ec	XC6117C017MR	Vdet-IC	1.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCH	ej	XC6117C047MR	Vdet-IC	4.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCK	-	XC9236B2KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DCK	ec	XC6117C018MR	Vdet-IC	1.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCK	ej	XC6117C048MR	Vdet-IC	4.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCL	-	XC9236B2LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DCL	ec	XC6117C019MR	Vdet-IC	1.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCL	ej	XC6117C049MR	Vdet-IC	4.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCM	-	XC9236B2MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DCM	ec	XC6117C020MR	Vdet-IC	2.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCM	ej	XC6117C050MR	Vdet-IC	5.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCN	ec	XC6117C021MR	Vdet-IC	2.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCP	ec	XC6117C022MR	Vdet-IC	2.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCR	ec	XC6117C023MR	Vdet-IC	2.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCS	ec	XC6117C024MR	Vdet-IC	2.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCT	ec	XC6117C025MR	Vdet-IC	2.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCU	ec	XC6117C026MR	Vdet-IC	2.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCV	ec	XC6117C027MR	Vdet-IC	2.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCX	ec	XC6117C028MR	Vdet-IC	2.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCY	ec	XC6117C029MR	Vdet-IC	2.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
DCZ	ec	XC6117C030MR	Vdet-IC	3.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	SOT-25	28xf	VD22	6g	Tor
Dd	-	BD49E30G	Vdet-IC	3.0V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
DD	-	AP131-18TW	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DD	-	AP131-18W	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DD	-	BD4823FVE	Vdet-IC	2.3V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DD	-	BD4823G	Vdet-IC	2.3V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DD	-	RN5RT53AA	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
DD	-	V6310DSP5B	Vdet-IC	3.5V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6g	Em
DD-	-	XC62GR3312M	LVR-IC	3.3V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
DD-	eh	XC62GP3312M	LVR-IC	3.3V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
DD+	-	XC62GR3322M	LVR-IC	3.3V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
DD+	eh	XC62GP3322M	LVR-IC	3.3V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
DD0	-	XC9236B30CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DD0	ej	XC6117D031MR	Vdet-IC	3.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DD1	-	XC9236B31CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DD1	ej	XC6117D032MR	Vdet-IC	3.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DD2	-	XC9236B32CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DD2	ej	XC6117D033MR	Vdet-IC	3.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DD3	-	XC9236B33CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DD3	ej	XC6117D034MR	Vdet-IC	3.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DD4	-	XC9236B34CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DD4	ej	XC6117D035MR	Vdet-IC	3.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DD5	-	XC9236B35CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DD5	ej	XC6117D036MR	Vdet-IC	3.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DD6	-	XC9236B36CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DD6	ej	XC6117D037MR	Vdet-IC	3.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DD7	-	XC9236B37CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DD7	ej	XC6117D038MR	Vdet-IC	3.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DD8	-	XC9236B38CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DD8	ej	XC6117D039MR	Vdet-IC	3.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DD9	-	XC9236B39CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DD9	ej	XC6117D040MR	Vdet-IC	4.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDA	-	XC9236B3ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DDA	ej	XC6117D041MR	Vdet-IC	4.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDB	-	XC9236B3BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DDB	ej	XC6117D042MR	Vdet-IC	4.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDC	-	XC9236B3CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DDC	ej	XC6117D043MR	Vdet-IC	4.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDD	-	XC9236B3DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DDD	ej	XC6117D044MR	Vdet-IC	4.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDE	-	XC9236B3ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DDE	ej	XC6117D045MR	Vdet-IC	4.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDF	-	XC9236B3FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DDF	ec	XC6117D016MR	Vdet-IC	1.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDF	ej	XC6117D046MR	Vdet-IC	4.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDH	-	XC9236B3HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DDH	ec	XC6117D017MR	Vdet-IC	1.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDH	ej	XC6117D047MR	Vdet-IC	4.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDK	-	XC9236B3KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DDK	ec	XC6117D018MR	Vdet-IC	1.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDK	ej	XC6117D048MR	Vdet-IC	4.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDL	-	XC9236B3LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DDL	ec	XC6117D019MR	Vdet-IC	1.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDL	ej	XC6117D049MR	Vdet-IC	4.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDM	-	XC9236B3MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DDM	ec	XC6117D020MR	Vdet-IC	2.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDM	ej	XC6117D050MR	Vdet-IC	5.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDN	ec	XC6117D021MR	Vdet-IC	2.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDP	ec	XC6117D022MR	Vdet-IC	2.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDR	ec	XC6117D023MR	Vdet-IC	2.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDS	ec	XC6117D024MR	Vdet-IC	2.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDT	ec	XC6117D025MR	Vdet-IC	2.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDU	ec	XC6117D026MR	Vdet-IC	2.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDV	ec	XC6117D027MR	Vdet-IC	2.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDX	ec	XC6117D028MR	Vdet-IC	2.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDY	ec	XC6117D029MR	Vdet-IC	2.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
DDZ	ec	XC6117D030MR	Vdet-IC	3.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	SOT-25	28xf	VD22	6g	Tor
De	-	BD49E31G	Vdet-IC	3.1V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
DE	-	AP131-19TW	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DE	-	AP131-19W	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DE	-	BD4824FVE	Vdet-IC	2.4V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DE	-	BD4824G	Vdet-IC	2.4V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DE	-	RN5RT54AA	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
DE	-	V6310ESP5B	Vdet-IC	4V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6g	Em
DE-	-	RT9193-33PB	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
DE-	-	XC62GR3412M	LVR-IC	3.4V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
DE-	eh	XC62GP3412M	LVR-IC	3.4V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
DE+	-	XC62GR3422M	LVR-IC	3.4V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
DE+	eh	XC62GP3422M	LVR-IC	3.4V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
DE=	-	RT9193-33GB	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
DE0	-	XC9236B40CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DE0	ej	XC6117E031MR	Vdet-IC	3.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DE1	ej	XC6117E032MR	Vdet-IC	3.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DE2	ej	XC6117E033MR	Vdet-IC	3.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DE3	ej	XC6117E034MR	Vdet-IC	3.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DE4	ej	XC6117E035MR	Vdet-IC	3.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DE5	ej	XC6117E036MR	Vdet-IC	3.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DE6	ej	XC6117E037MR	Vdet-IC	3.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DE7	ej	XC6117E038MR	Vdet-IC	3.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DE8	ej	XC6117E039MR	Vdet-IC	3.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DE9	ej	XC6117E040MR	Vdet-IC	4.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEA	ej	XC6117E041MR	Vdet-IC	4.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEB	ej	XC6117E042MR	Vdet-IC	4.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEC	ej	XC6117E043MR	Vdet-IC	4.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DED	ej	XC6117E044MR	Vdet-IC	4.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEE	ej	XC6117E045MR	Vdet-IC	4.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEF	ec	XC6117E016MR	Vdet-IC	1.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEF	ej	XC6117E046MR	Vdet-IC	4.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEH	ec	XC6117E017MR	Vdet-IC	1.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEH	ej	XC6117E047MR	Vdet-IC	4.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEK	ec	XC6117E018MR	Vdet-IC	1.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEK	ej	XC6117E048MR	Vdet-IC	4.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEL	ec	XC6117E019MR	Vdet-IC	1.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEL	ej	XC6117E049MR	Vdet-IC	4.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEM	ec	XC6117E020MR	Vdet-IC	2.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEM	ej	XC6117E050MR	Vdet-IC	5.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEN	ec	XC6117E021MR	Vdet-IC	2.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEP	ec	XC6117E022MR	Vdet-IC	2.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DER	ec	XC6117E023MR	Vdet-IC	2.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DES	ec	XC6117E024MR	Vdet-IC	2.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DET	ec	XC6117E025MR	Vdet-IC	2.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEU	ec	XC6117E026MR	Vdet-IC	2.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEV	ec	XC6117E027MR	Vdet-IC	2.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEX	ec	XC6117E028MR	Vdet-IC	2.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEY	ec	XC6117E029MR	Vdet-IC	2.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
DEZ	ec	XC6117E030MR	Vdet-IC	3.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	SOT-25	28xf	VD22	6g	Tor
Df	-	BD49E32G	Vdet-IC	3.2V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
DF	-	AP131-20TW	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DF	-	AP131-20W	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DF	-	BD4825FVE	Vdet-IC	2.5V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DF	-	BD4825G	Vdet-IC	2.5V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DF	-	RN5RT55AA	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
DF	-	V6310FSP5B	Vdet-IC	4.5V±2%, -Reset PPO, 50ms	SOT-23-5	28vdr	VD7	6g	Em
DF-	-	XC62GR3512M	LVR-IC	3.5V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
DF-	eh	XC62GP3512M	LVR-IC	3.5V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
DF+	-	XC62GR3522M	LVR-IC	3.5V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
DF+	eh	XC62GP3522M	LVR-IC	3.5V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
DF0	ej	XC6117F031MR	Vdet-IC	3.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DF1	ej	XC6117F032MR	Vdet-IC	3.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DF2	ej	XC6117F033MR	Vdet-IC	3.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DF3	ej	XC6117F034MR	Vdet-IC	3.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DF4	ej	XC6117F035MR	Vdet-IC	3.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DF5	ej	XC6117F036MR	Vdet-IC	3.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DF6	ej	XC6117F037MR	Vdet-IC	3.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DF7	ej	XC6117F038MR	Vdet-IC	3.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DF8	-	XC9236B08DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DF8	ej	XC6117F039MR	Vdet-IC	3.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DF9	-	XC9236B09DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DF9	ej	XC6117F040MR	Vdet-IC	4.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFA	ej	XC6117F041MR	Vdet-IC	4.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFB	ej	XC6117F042MR	Vdet-IC	4.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFC	ej	XC6117F043MR	Vdet-IC	4.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFD	ej	XC6117F044MR	Vdet-IC	4.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFE	ej	XC6117F045MR	Vdet-IC	4.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFF	ec	XC6117F016MR	Vdet-IC	1.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFF	ej	XC6117F046MR	Vdet-IC	4.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFH	ec	XC6117F017MR	Vdet-IC	1.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFH	ej	XC6117F047MR	Vdet-IC	4.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFK	ec	XC6117F018MR	Vdet-IC	1.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFK	ej	XC6117F048MR	Vdet-IC	4.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFL	-	XC9236B0LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DFL	ec	XC6117F019MR	Vdet-IC	1.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFL	ej	XC6117F049MR	Vdet-IC	4.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFM	-	XC9236B0MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DFM	ec	XC6117F020MR	Vdet-IC	2.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFM	ej	XC6117F050MR	Vdet-IC	5.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFN	ec	XC6117F021MR	Vdet-IC	2.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DFP	ec	XC6117F022MR	Vdet-IC	2.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFR	ec	XC6117F023MR	Vdet-IC	2.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFS	ec	XC6117F024MR	Vdet-IC	2.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFT	ec	XC6117F025MR	Vdet-IC	2.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFU	ec	XC6117F026MR	Vdet-IC	2.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFV	ec	XC6117F027MR	Vdet-IC	2.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFX	ec	XC6117F028MR	Vdet-IC	2.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFY	ec	XC6117F029MR	Vdet-IC	2.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
DFZ	ec	XC6117F030MR	Vdet-IC	3.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	SOT-25	28xf	VD22	6g	Tor
Dg	-	BD49E33G	Vdet-IC	3.3V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
DG	-	AP131-21TW	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DG	-	AP131-21W	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DG	-	BD4826FVE	Vdet-IC	2.6V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DG	-	BD4826G	Vdet-IC	2.6V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DG	-	RN5RT56AA	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
DG	-	V6310GSP5B	Vdet-IC	2.0V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6g	Em
Dh	-	BD49E34G	Vdet-IC	3.4V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
DH	-	AP131-22TW	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DH	-	AP131-22W	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DH	-	BD4827FVE	Vdet-IC	2.7V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DH	-	BD4827G	Vdet-IC	2.7V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DH	-	RN5RT57AA	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
DH	-	V6310HSP5B	Vdet-IC	2.4V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6g	Em
DH-	-	RT9193-25PB	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
DH-	-	XC62GR3612M	LVR-IC	3.6V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
DH-	eh	XC62GP3612M	LVR-IC	3.6V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
DH+	-	XC62GR3622M	LVR-IC	3.6V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
DH+	eh	XC62GP3622M	LVR-IC	3.6V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
DH=	-	RT9193-25GB	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
DH0	-	XC9236B10DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DH0	ej	XC6117H031MR	Vdet-IC	3.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DH1	-	XC9236B11DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DH1	ej	XC6117H032MR	Vdet-IC	3.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DH2	-	XC9236B12DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DH2	ej	XC6117H033MR	Vdet-IC	3.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DH3	-	XC9236B13DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DH3	ej	XC6117H034MR	Vdet-IC	3.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DH4	-	XC9236B14DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DH4	ej	XC6117H035MR	Vdet-IC	3.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DH5	-	XC9236B15DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DH5	ej	XC6117H036MR	Vdet-IC	3.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DH6	-	XC9236B16DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DH6	ej	XC6117H037MR	Vdet-IC	3.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DH7	-	XC9236B17DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DH7	ej	XC6117H038MR	Vdet-IC	3.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DH8	-	XC9236B18DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DH8	ej	XC6117H039MR	Vdet-IC	3.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DH9	-	XC9236B19DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DH9	ej	XC6117H040MR	Vdet-IC	4.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHA	-	XC9236B1ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DHA	ej	XC6117H041MR	Vdet-IC	4.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHB	-	XC9236B1BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DHB	ej	XC6117H042MR	Vdet-IC	4.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHC	-	XC9236B1CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DHC	ej	XC6117H043MR	Vdet-IC	4.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHD	-	XC9236B1DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DHD	ej	XC6117H044MR	Vdet-IC	4.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHE	-	XC9236B1EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DHE	ej	XC6117H045MR	Vdet-IC	4.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHF	-	XC9236B1FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DHF	ec	XC6117H016MR	Vdet-IC	1.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHF	ej	XC6117H046MR	Vdet-IC	4.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHH	-	XC9236B1HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DHH	ec	XC6117H017MR	Vdet-IC	1.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHH	ej	XC6117H047MR	Vdet-IC	4.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHK	-	XC9236B1KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DHK	ec	XC6117H018MR	Vdet-IC	1.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHK	ej	XC6117H048MR	Vdet-IC	4.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHL	-	XC9236B1LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DHL	ec	XC6117H019MR	Vdet-IC	1.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DHL	ej	XC6117H049MR	Vdet-IC	4.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHM	-	XC9236B1MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DHM	ec	XC6117H020MR	Vdet-IC	2.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHM	ej	XC6117H050MR	Vdet-IC	5.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHN	ec	XC6117H021MR	Vdet-IC	2.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHP	ec	XC6117H022MR	Vdet-IC	2.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHR	ec	XC6117H023MR	Vdet-IC	2.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHS	ec	XC6117H024MR	Vdet-IC	2.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHT	ec	XC6117H025MR	Vdet-IC	2.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHU	ec	XC6117H026MR	Vdet-IC	2.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHV	ec	XC6117H027MR	Vdet-IC	2.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHX	ec	XC6117H028MR	Vdet-IC	2.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHY	ec	XC6117H029MR	Vdet-IC	2.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DHZ	ec	XC6117H030MR	Vdet-IC	3.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	SOT-25	28xf	VD22	6g	Tor
DI	-	AP131-23TW	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DI	-	AP131-23W	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DI	-	V6310ISP5B	Vdet-IC	2.8V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6g	Em
DJ	-	AP131-24TW	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DJ	-	AP131-24W	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DJ	-	BD4828FVE	Vdet-IC	2.8V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DJ	-	BD4828G	Vdet-IC	2.8V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DJ	-	RN5RT58AA	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
DJ	-	V6310JSP5B	Vdet-IC	3.5V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6g	Em
DJ-	-	RT9193-28PB	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
DJ=	-	RT9193-28GB	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
Dk	-	BD49E35G	Vdet-IC	3.5V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
DK	-	AP131-25TW	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DK	-	AP131-25W	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DK	-	BD4829FVE	Vdet-IC	2.9V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DK	-	BD4829G	Vdet-IC	2.9V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DK	-	RN5RT59AA	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
DK	-	V6310KSP5B	Vdet-IC	4V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6g	Em
DK-	-	RT9193-30PB	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
DK-	-	XC62GR3712M	LVR-IC	3.7V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
DK-	eh	XC62GP3712M	LVR-IC	3.7V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
DK+	-	XC62GR3722M	LVR-IC	3.7V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
DK+	eh	XC62GP3722M	LVR-IC	3.7V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
DK=	-	RT9193-30GB	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
DK0	-	XC9236B20DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DK1	-	XC9236B21DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DK2	-	XC9236B22DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DK3	-	XC9236B23DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DK4	-	XC9236B24DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DK5	-	XC9236B25DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DK6	-	XC9236B26DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DK7	-	XC9236B27DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DK8	-	XC9236B28DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DK9	-	XC9236B29DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DKA	-	XC9236B2ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DKB	-	XC9236B2BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DKC	-	XC9236B2CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DKD	-	XC9236B2DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DKE	-	XC9236B2EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DKF	-	XC9236B2FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DKH	-	XC9236B2HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DKK	-	XC9236B2KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DKL	-	XC9236B2LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DKM	-	XC9236B2MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
dL	-	NX3V1G66GW	CMOS-Log	Single-pole single-throw analog switch	SOT-353-1	28	Log16	6a	Nxp
DL	-	AP131-26TW	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DL	-	AP131-26W	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DL	-	BD4830FVE	Vdet-IC	3.0V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DL	-	BD4830G	Vdet-IC	3.0V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DL	-	NX3L1G66GW	CMOS-Log	Single-pole single-throw analog switch	SOT-353-1	28	Log16	6a	Nxp
DL	-	R1112N501A	LVR-IC	LDO, Low noise, 5.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
DL	-	V6310LSP5B	Vdet-IC	4.5V±2%, +Reset PPO, 50ms	SOT-23-5	28vdo	VD3	6g	Em
DL-	-	RT9198-33PB	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
DL-	-	XC62GR3812M	LVR-IC	3.8V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
DL-	eh	XC62GP3812M	LVR-IC	3.8V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
DL+	-	XC62GR3822M	LVR-IC	3.8V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DL+	eh	XC62GP3822M	LVR-IC	3.8V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
DL=	-	RT9198-33GB	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
DL0	-	XC9236B30DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DL1	-	XC9236B31DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DL2	-	XC9236B32DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DL3	-	XC9236B33DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DL4	-	XC9236B34DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DL5	-	XC9236B35DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DL6	-	XC9236B36DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DL7	-	XC9236B37DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DL8	-	XC9236B38DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DL9	-	XC9236B39DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DLA	-	XC9236B3ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DLB	-	XC9236B3BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DLC	-	XC9236B3CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DLD	-	XC9236B3DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DLE	-	XC9236B3EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DLF	-	XC9236B3FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DLH	-	XC9236B3HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DLK	-	XC9236B3KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DLL	-	XC9236B3LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DLM	-	XC9236B3MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
Dm	-	BD49E36G	Vdet-IC	3.6V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
DM	-	AP131-27TW	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DM	-	AP131-27W	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DM	-	BD4831FVE	Vdet-IC	3.1V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DM	-	BD4831G	Vdet-IC	3.1V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DM	-	V6310MSP5B	Vdet-IC	2.0V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6g	Em
DM-	-	RT9198-15PB	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
DM-	-	XC62GR3912M	LVR-IC	3.9V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
DM-	eh	XC62GP3912M	LVR-IC	3.9V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
DM+	-	XC62GR3922M	LVR-IC	3.9V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
DM+	eh	XC62GP3922M	LVR-IC	3.9V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
DM0	-	XC9236B40DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
Dn	-	BD49E37G	Vdet-IC	3.7V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
DN	-	AIC1647CJ	LDR-IC	1.2 MHz PWM White LED driver, OVP 4.2V	TSOT-23-5	28sq	LD3	6a	Aic
DN	-	AP131-28TW	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DN	-	AP131-28W	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DN	-	BD4832FVE	Vdet-IC	3.2V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DN	-	BD4832G	Vdet-IC	3.2V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DN	-	V6310NSP5B	Vdet-IC	2.4V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6g	Em
DN-	-	RT9198-18PB	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
DN8	-	XC9236G08CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DN9	-	XC9236G09CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DNC	-	ADP3309ART-2.7-R	LVR-IC	LDO, 2.7V±1.2%, 100mA, -Shutdown, -Error	SOT-23-5	28c7	VR8	6a	Ad
DNL	-	XC9236G0LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DNM	-	XC9236G0MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DNP	-	AIC1647PJ	LDR-IC	1.2 MHz PWM White LED driver, OVP 4.2V	TSOT-23-5	28sq	LD3	6a	Aic
dO	-	NX3V1T66GW	CMOS-Log	Single-pole single-throw analog switch	SOT-353-1	28	Log16	6a	Nxp
DO	-	AP131-29TW	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DO	-	AP131-29W	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DO	-	NX3L1T66GW	CMOS-Log	Single-pole single-throw analog switch	SOT-353-1	28	Log16	6a	Nxp
DO	-	V6310OSP5B	Vdet-IC	2.8V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6g	Em
Dp	-	BD49E38G	Vdet-IC	3.8V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
DP	-	AP131-30TW	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DP	-	AP131-30W	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DP	-	BD4833FVE	Vdet-IC	3.3V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DP	-	BD4833G	Vdet-IC	3.3V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DP	-	V6310PSP5B	Vdet-IC	3.5V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6g	Em
DP-	-	RT9198-25PB	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
DP0	-	XC9236G10CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DP1	-	XC9236G11CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DP2	-	XC9236G12CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DP3	-	XC9236G13CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DP4	-	XC9236G14CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DP5	-	XC9236G15CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DP6	-	XC9236G16CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DP7	-	XC9236G17CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DP8	-	XC9236G18CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DP9	-	XC9236G19CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DPA	-	XC9236G1ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DPB	-	XC9236G1BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DPC	-	ADP3309ART-3-R	LVR-IC	LDO, 3.0V±1.2%, 100mA, -Shutdown, -Error	SOT-23-5	28c7	VR8	6a	Ad
DPC	-	XC9236G1CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DPD	-	XC9236G1DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DPE	-	XC9236G1ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DPF	-	XC9236G1FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DPH	-	XC9236G1HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DPK	-	XC9236G1KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DPL	-	XC9236G1LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DPM	-	XC9236G1MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DQ	-	AP131-31TW	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DQ	-	AP131-31W	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DQ	-	BD4834FVE	Vdet-IC	3.4V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DQ	-	BD4834G	Vdet-IC	3.4V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DQ	-	V6310QSP5B	Vdet-IC	4V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6g	Em
DQ-	-	RT9198-28PB	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
Dr	-	BD49E39G	Vdet-IC	3.9V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
DR	-	AP131-32TW	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DR	-	AP131-32W	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DR	-	AT1201-28XR	LVR-IC	LDO, LN, +CE, 2.8V±2%, 150mA	SOT-23-5	28un	VR7	6a	Atr
DR	-	BD4835FVE	Vdet-IC	3.5V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DR	-	BD4835G	Vdet-IC	3.5V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DR	-	V6310RSP5B	Vdet-IC	4.5V±2%, -Reset ODO, 50ms	SOT-23-5	28vdr	VD6	6g	Em
DR-	-	RT9198-30PB	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
DR0	-	XC9236G20CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DR1	-	XC9236G21CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DR2	-	XC9236G22CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DR3	-	XC9236G23CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DR4	-	XC9236G24CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DR5	-	XC9236G25CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DR6	-	XC9236G26CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DR7	-	XC9236G27CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DR8	-	XC9236G28CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DR9	-	XC9236G29CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DRA	-	XC9236G2ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DRB	-	XC9236G2BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DRC	-	ADP3309ART-3.3-R	LVR-IC	LDO, 3.3V±1.2%, 100mA, -Shutdown, -Error	SOT-23-5	28c7	VR8	6a	Ad
DRC	-	XC9236G2CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DRD	-	XC9236G2DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DRE	-	XC9236G2ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DRF	-	XC9236G2FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DRH	-	XC9236G2HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DRK	-	XC9236G2KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DRL	-	XC9236G2LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DRM	-	XC9236G2MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DS	-	AP131-33TW	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DS	-	AP131-33W	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DS	-	BD4836FVE	Vdet-IC	3.6V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DS	-	BD4836G	Vdet-IC	3.6V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DS-	-	RT9193-15PB	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
DS=	-	RT9193-15GB	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
DS0	-	XC9236G30CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DS1	-	XC9236G31CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DS2	-	XC9236G32CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DS3	-	XC9236G33CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DS4	-	XC9236G34CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DS5	-	XC9236G35CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DS6	-	XC9236G36CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DS7	-	XC9236G37CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DS8	-	XC9236G38CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DS9	-	XC9236G39CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DSA	-	XC9236G3ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DSB	-	XC9236G3BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DSC	-	XC9236G3CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DSD	-	XC9236G3DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DSE	-	XC9236G3ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DSF	-	XC9236G3FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DSH	-	XC9236G3HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DSK	-	XC9236G3KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DSL	-	XC9236G3LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DSM	-	XC9236G3MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DT	-	AP131-34TW	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DT	-	AP131-34W	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DT	-	BD4837FVE	Vdet-IC	3.7V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DT	-	BD4837G	Vdet-IC	3.7V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DT-	-	RT9198-18PBR	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
DT=	-	RT9198-18GBR	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
DT0	-	XC9236G40CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DTC	-	ADP3309ART-3.6-R	LVR-IC	LDO, 3.6V±1.2%, 100mA, -Shutdown, -Error	SOT-23-5	28c7	VR8	6a	Ad
DU	-	AP131-35TW	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DU	-	AP131-35W	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DU	-	BD4838FVE	Vdet-IC	3.8V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DU	-	BD4838G	Vdet-IC	3.8V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DU-	-	RT9198-25PBR	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
DU=	-	RT9198-25GBR	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
DU8	-	XC9236G08DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DU9	-	XC9236G09DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DUL	-	XC9236G0LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DUM	-	XC9236G0MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DV	-	AP131-36TW	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DV	-	AP131-36W	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DV	-	BD4839FVE	Vdet-IC	3.9V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
DV	-	BD4839G	Vdet-IC	3.9V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
DV-	-	RT9198-28PBR	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
DV=	-	RT9198-28GBR	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
DV0	-	XC9236G10DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DV1	-	XC9236G11DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DV2	-	XC9236G12DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DV3	-	XC9236G13DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DV4	-	XC9236G14DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DV5	-	XC9236G15DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DV6	-	XC9236G16DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DV7	-	XC9236G17DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DV8	-	XC9236G18DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DV9	-	XC9236G19DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DVA	-	XC9236G1ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DVB	-	XC9236G1BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DVC	-	ADP3309ART-2.85-R	LVR-IC	LDO, 2.85V±1.2%, 100mA, -Shutdown, -Error	SOT-23-5	28c7	VR8	6a	Ad
DVC	-	XC9236G1CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DVD	-	XC9236G1DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DVE	-	XC9236G1EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DVF	-	XC9236G1FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DVH	-	XC9236G1HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DVK	-	XC9236G1KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DVL	-	XC9236G1LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DVM	-	XC9236G1MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DW	-	AP131-37TW	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DW	-	AP131-37W	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DW-	-	RT9198-30PBR	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
DW=	-	RT9198-30GBR	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
DWC	-	ADP3309ART-2.9-R	LVR-IC	LDO, 2.9V±1.2%, 100mA, -Shutdown, -Error	SOT-23-5	28c7	VR8	6a	Ad
DX	-	AP131-38TW	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DX	-	AP131-38W	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DX	-	AT1201-28X	LVR-IC	LDO, LN, +CE, 2.8V±2%, 150mA	SOT-23-5	28vrx	VR7	6a	Atr
DX-	-	RT9198-33PBR	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
DX=	-	RT9198-33GBR	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
DX0	-	XC9236G20DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DX1	-	XC9236G21DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DX2	-	XC9236G22DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DX3	-	XC9236G23DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DX4	-	XC9236G24DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DX5	-	XC9236G25DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DX6	-	XC9236G26DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DX7	-	XC9236G27DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DX8	-	XC9236G28DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DX9	-	XC9236G29DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DXA	-	XC9236G2ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DXB	-	XC9236G2BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DXC	-	XC9236G2CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DXD	-	XC9236G2DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DXE	-	XC9236G2EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DXF	-	XC9236G2FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DXH	-	XC9236G2HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DXK	-	XC9236G2KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DXL	-	XC9236G2LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DXM	-	XC9236G2MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
Dy	-	BD49E40G	Vdet-IC	4.0V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
DY	-	AP131-39TW	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DY	-	AP131-39W	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DY	-	TC1055-1.8VCT713	LVR-IC	LDO, 1.8V±2%, 100mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
DY-	-	RT9198-32PB	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
DY0	-	XC9236G30DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DY1	-	XC9236G31DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DY2	-	XC9236G32DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DY3	-	XC9236G33DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DY4	-	XC9236G34DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DY5	-	XC9236G35DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DY6	-	XC9236G36DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DY7	-	XC9236G37DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DY8	-	XC9236G38DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DY9	-	XC9236G39DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DYA	-	XC9236G3ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DYB	-	XC9236G3BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DYC	-	XC9236G3CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DYD	-	XC9236G3DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DYE	-	XC9236G3EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DYF	-	XC9236G3FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DYH	-	XC9236G3HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DYK	-	XC9236G3KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DYL	-	XC9236G3LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DYM	-	XC9236G3MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
DZ	-	AP131-40TW	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR4	6a	Ana
DZ	-	AP131-40W	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR4	6k	Ana
DZ	-	TC1055-2.8VCT713	LVR-IC	LDO, 2.8V±2%, 100mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
DZ-	-	RT9193-32PB	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
DZ0	-	XC9236G40DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
E0	-	RT9167-15CB	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
E0	ea	RN5VD40AA	Vdet-IC	4V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E0	eu	BL8552CB5TR20	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E0	eu	BL8555-20PQ	LVR-IC	LDO, 2.0V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E0	eu	BL8555-20PRA	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E0	eu	BL8555-20PRB	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E0	eu	LR8555-20PQ	LVR-IC	LDO, 2.0V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E0	eu	LR8555-20PRA	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E0	eu	LR8555-20PRB	LVR-IC	LDO, 2.0V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E0	fg	BL8552CB5TR30	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E0	fg	BL8555-30PQ	LVR-IC	LDO, 3.0V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E0	fg	BL8555-30PRA	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E0	fg	BL8555-30PRB	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E0	fg	LR8555-30PQ	LVR-IC	LDO, 3.0V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E0	fg	LR8555-30PRA	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E0	fg	LR8555-30PRB	LVR-IC	LDO, 3.0V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E0	fh	BL8555-40PQ	LVR-IC	LDO, 4.0V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E0	fh	BL8555-40PRA	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E0	fh	BL8555-40PRB	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E0	fh	LR8555-40PQ	LVR-IC	LDO, 4.0V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E0	fh	LR8555-40PRA	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E0	fh	LR8555-40PRB	LVR-IC	LDO, 4.0V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E0	fi	BL8555-50PQ	LVR-IC	LDO, 5.0V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E0	fi	BL8555-50PRA	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E0	fi	BL8555-50PRB	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E0	fi	LR8555-50PQ	LVR-IC	LDO, 5.0V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E0	fi	LR8555-50PRA	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E0	fi	LR8555-50PRB	LVR-IC	LDO, 5.0V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E0	fk	BL8555-30EQ	LVR-IC	LDO, 3.0V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E0	fk	BL8555-30ERA	LVR-IC	LDO, 3.0V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E0	fk	BL8555-30ERB	LVR-IC	LDO, 3.0V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E0	fk	LR8555-30EQ	LVR-IC	LDO, 3.0V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E0	fk	LR8555-30ERA	LVR-IC	LDO, 3.0V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E0	fk	LR8555-30ERB	LVR-IC	LDO, 3.0V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E0	fm	BL8555-40EQ	LVR-IC	LDO, 4.0V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E0	fm	BL8555-40ERA	LVR-IC	LDO, 4.0V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E0	fm	BL8555-40ERB	LVR-IC	LDO, 4.0V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E0	fm	LR8555-40EQ	LVR-IC	LDO, 4.0V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E0	fm	LR8555-40ERA	LVR-IC	LDO, 4.0V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E0	fm	LR8555-40ERB	LVR-IC	LDO, 4.0V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E0	fn	BL8555-50EQ	LVR-IC	LDO, 5.0V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E0	fn	BL8555-50ERA	LVR-IC	LDO, 5.0V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E0	fn	BL8555-50ERB	LVR-IC	LDO, 5.0V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E0	fn	LR8555-50EQ	LVR-IC	LDO, 5.0V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E0	fn	LR8555-50ERA	LVR-IC	LDO, 5.0V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E0	fn	LR8555-50ERB	LVR-IC	LDO, 5.0V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E0	fp	BL8555-20EQ	LVR-IC	LDO, 2.0V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E0	fp	BL8555-20ERA	LVR-IC	LDO, 2.0V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E0	fp	BL8555-20ERB	LVR-IC	LDO, 2.0V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E0	fp	LR8555-20EQ	LVR-IC	LDO, 2.0V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E0	fp	LR8555-20ERA	LVR-IC	LDO, 2.0V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E0	fp	LR8555-20ERB	LVR-IC	LDO, 2.0V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E0-	-	RT9167-15PB	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
E00	ej	XC6121A231MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E001	-	RP105Q062B	LVR-IC	LDO, 0.6V±15mV, 400mA, +CE	SC-88A	28zf	VR11	6ma	Ric
E002	-	RP105Q072B	LVR-IC	LDO, 0.7V±15mV, 400mA, +CE	SC-88A	28zf	VR11	6ma	Ric
E003	-	RP105Q082B	LVR-IC	LDO, 0.8V±15mV, 400mA, +CE	SC-88A	28zf	VR11	6ma	Ric
E004	-	RP105Q092B	LVR-IC	LDO, 0.9V±15mV, 400mA, +CE	SC-88A	28zf	VR11	6ma	Ric
E005	-	RP105Q102B	LVR-IC	LDO, 1.0V±15mV, 400mA, +CE	SC-88A	28zf	VR11	6ma	Ric
E006	-	RP105Q122B	LVR-IC	LDO, 1.2V±15mV, 400mA, +CE	SC-88A	28zf	VR11	6ma	Ric
E007	-	RP105Q132B	LVR-IC	LDO, 1.3V±15mV, 400mA, +CE	SC-88A	28zf	VR11	6ma	Ric
E008	-	RP105Q142B	LVR-IC	LDO, 1.4V±15mV, 400mA, +CE	SC-88A	28zf	VR11	6ma	Ric
E009	-	RP105Q152B	LVR-IC	LDO, 1.5V±15mV, 400mA, +CE	SC-88A	28zf	VR11	6ma	Ric
E01	-	RP173N121B5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E01	ej	XC6121A232MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E010	-	RP105Q112B	LVR-IC	LDO, 1.1V±15mV, 400mA, +CE	SC-88A	28zf	VR11	6ma	Ric
E02	-	RP173N181B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E02	ej	XC6121A233MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E03	-	RP173N281B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E03	-	TC53C4002ECT	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
E03	ej	XC6121A234MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E04	ej	XC6121A235MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E05	ej	XC6121A236MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E06	ej	XC6121A237MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E07	ej	XC6121A238MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E08	ej	XC6121A239MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E09	ed	XC9215A096M	DC-DC-IC	PWM st-dwn, 0.9V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E09	ej	XC6121A240MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0A	-	R3116N311A	Vdet-IC	3.1V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0A	-	XC6108C40AMR	Vdet-IC	4.0V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E0A	ej	XC6121A241MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0B	-	R3116N321A	Vdet-IC	3.2V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0B	-	XC6108C40BMR	Vdet-IC	4.0V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E0B	ej	XC6121A242MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0C	-	R3116N331A	Vdet-IC	3.3V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0C	-	XC6108C40CMR	Vdet-IC	4.0V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E0C	ej	XC6121A243MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0D	-	R3116N341A	Vdet-IC	3.4V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0D	-	XC6108C40DMR	Vdet-IC	4.0V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E0D	ej	XC6121A244MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0E	-	R3116N351A	Vdet-IC	3.5V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0E	ej	XC6121A245MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0F	-	R3116N361A	Vdet-IC	3.6V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0F	ec	XC6121A216MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0F	ej	XC6121A246MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0G	-	R3116N371A	Vdet-IC	3.7V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0H	-	R3116N381A	Vdet-IC	3.8V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0H	ec	XC6121A217MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0H	ej	XC6121A247MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0J	-	R3116N391A	Vdet-IC	3.9V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0K	-	R3116N401A	Vdet-IC	4V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0K	ec	XC6121A218MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0K	ej	XC6121A248MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E0L	-	R3116N411A	Vdet-IC	4.1V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0L	ec	XC6121A219MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0L	ej	XC6121A249MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0M	-	R3116N421A	Vdet-IC	4.2V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0M	ec	XC6121A220MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0M	ed	XC9215A09CM	DC-DC-IC	PWM st-dwn, 0.9V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E0M	ej	XC6121A250MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0N	-	R3116N431A	Vdet-IC	4.3V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0N	ec	XC6121A221MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0P	-	R3116N441A	Vdet-IC	4.4V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0P	ec	XC6121A222MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0Q	-	R3116N451A	Vdet-IC	4.5V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0R	-	R3116N461A	Vdet-IC	4.6V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0R	ec	XC6121A223MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0S	-	R3116N471A	Vdet-IC	4.7V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0S	ec	XC6121A224MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0T	-	R3116N481A	Vdet-IC	4.8V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0T	ec	XC6121A225MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0U	-	R3116N491A	Vdet-IC	4.9V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0U	ec	XC6121A226MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0V	-	R3116N501A	Vdet-IC	5.0V±0.8%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Ric
E0V	ec	XC6121A227MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0X	ec	XC6121A228MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0Y	ec	XC6121A229MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E0Z	ec	XC6121A230MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
e1	-	BD45E312G-M	Vdet-IC	3.1V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
E1	-	CH471EPT	Si-diode	Dual, Schottky barrier, 40V, 100mA, Vf<0.55V(100mA)	SOT-23-5	28bg	-	6a	Chm
E1	-	ELM7S00B	CMOS-Log	2-input NAND gate	SOT-25	28	Log1	6g	Elm
E1	-	RT9167-16CB	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
E1	-	Si91842DT-50	LVR-IC	LDO, LN, 5.0V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
E1	-	TC7S00F	CMOS-Log	2-input NAND gate	SSOP-5	28	Log1	6a	Tos
E1	-	TC7S00FU	CMOS-Log	2-input NAND gate	SC-70-5	28	Log1	6a	Tos
E1	ea	RN5VD41AA	Vdet-IC	4.1V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1	eu	BL8552CB5TR21	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E1	eu	BL8555-21PQ	LVR-IC	LDO, 2.1V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E1	eu	BL8555-21PRA	LVR-IC	LDO, 2.1V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E1	eu	BL8555-21PRB	LVR-IC	LDO, 2.1V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E1	eu	LR8555-21PQ	LVR-IC	LDO, 2.1V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E1	eu	LR8555-21PRA	LVR-IC	LDO, 2.1V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E1	eu	LR8555-21PRB	LVR-IC	LDO, 2.1V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E1	fg	BL8552CB5TR31	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E1	fg	BL8555-31PQ	LVR-IC	LDO, 3.1V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E1	fg	BL8555-31PRA	LVR-IC	LDO, 3.1V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E1	fg	BL8555-31PRB	LVR-IC	LDO, 3.1V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E1	fg	LR8555-31PQ	LVR-IC	LDO, 3.1V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E1	fg	LR8555-31PRA	LVR-IC	LDO, 3.1V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E1	fg	LR8555-31PRB	LVR-IC	LDO, 3.1V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E1	fh	BL8555-41PQ	LVR-IC	LDO, 4.1V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E1	fh	BL8555-41PRA	LVR-IC	LDO, 4.1V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E1	fh	BL8555-41PRB	LVR-IC	LDO, 4.1V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E1	fh	LR8555-41PQ	LVR-IC	LDO, 4.1V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E1	fh	LR8555-41PRA	LVR-IC	LDO, 4.1V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E1	fh	LR8555-41PRB	LVR-IC	LDO, 4.1V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E1	fk	BL8555-31EQ	LVR-IC	LDO, 3.1V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E1	fk	BL8555-31ERA	LVR-IC	LDO, 3.1V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E1	fk	BL8555-31ERB	LVR-IC	LDO, 3.1V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E1	fk	LR8555-31EQ	LVR-IC	LDO, 3.1V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E1	fk	LR8555-31ERA	LVR-IC	LDO, 3.1V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E1	fk	LR8555-31ERB	LVR-IC	LDO, 3.1V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E1	fm	BL8555-41EQ	LVR-IC	LDO, 4.1V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E1	fm	BL8555-41ERA	LVR-IC	LDO, 4.1V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E1	fm	BL8555-41ERB	LVR-IC	LDO, 4.1V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E1	fm	LR8555-41EQ	LVR-IC	LDO, 4.1V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E1	fm	LR8555-41ERA	LVR-IC	LDO, 4.1V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E1	fm	LR8555-41ERB	LVR-IC	LDO, 4.1V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E1	fp	BL8555-21EQ	LVR-IC	LDO, 2.1V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E1	fp	BL8555-21ERA	LVR-IC	LDO, 2.1V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E1	fp	BL8555-21ERB	LVR-IC	LDO, 2.1V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E1	fp	LR8555-21EQ	LVR-IC	LDO, 2.1V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E1	fp	LR8555-21ERA	LVR-IC	LDO, 2.1V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E1	fp	LR8555-21ERB	LVR-IC	LDO, 2.1V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E10	-	R1224N102E	DC-DC-IC	PWM/VFM step-down, 1V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
E10	ed	XC9215A106M	DC-DC-IC	PWM st-dwn, 1.0V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E10	ej	XC6121A331MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E11	ed	XC9215A116M	DC-DC-IC	PWM st-dwn, 1.1V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E11	ej	XC6121A332MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E12	-	R1224N122E	DC-DC-IC	PWM/VFM step-down, 1.2V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
E12	-	RP173N121B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E12	ed	XC9215A126M	DC-DC-IC	PWM st-dwn, 1.2V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E12	ej	XC6121A333MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E13	-	RP173N131B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E13	-	TC53C4102ECT	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
E13	ed	XC9215A136M	DC-DC-IC	PWM st-dwn, 1.3V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E13	ej	XC6121A334MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E14	-	RP173N141B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E14	ed	XC9215A146M	DC-DC-IC	PWM st-dwn, 1.4V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E14	ej	XC6121A335MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E15	-	R1224N152E	DC-DC-IC	PWM/VFM step-down, 1.5V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
E15	-	RP173N151B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E15	eb	XC6367E152MR	DC-DC-IC	PWM step-up, 1.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E15	ed	XC9215A156M	DC-DC-IC	PWM st-dwn, 1.5V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E15	ej	XC6121A336MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E16	-	RP173N161B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E16	eb	XC6367E162MR	DC-DC-IC	PWM step-up, 1.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E16	ed	XC9215A166M	DC-DC-IC	PWM st-dwn, 1.6V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E16	ej	XC6121A337MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E17	-	RP173N171B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E17	eb	XC6367E172MR	DC-DC-IC	PWM step-up, 1.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E17	ed	XC9215A176M	DC-DC-IC	PWM st-dwn, 1.7V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E17	ej	XC6121A338MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E18	-	R1224N182E	DC-DC-IC	PWM/VFM step-down, 1.8V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
E18	-	RP173N181B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E18	eb	XC6367E182MR	DC-DC-IC	PWM step-up, 1.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E18	ed	XC9215A186M	DC-DC-IC	PWM st-dwn, 1.8V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E18	ej	XC6121A339MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E19	-	RP173N191B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E19	eb	XC6367E192MR	DC-DC-IC	PWM step-up, 1.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E19	ed	XC9215A196M	DC-DC-IC	PWM st-dwn, 1.9V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E19	ej	XC6121A340MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1A	-	R3116N311C	Vdet-IC	3.1V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1A	-	XC6108C41AMR	Vdet-IC	4.1V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E1A	ed	XC9215A10CM	DC-DC-IC	PWM st-dwn, 1.0V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E1A	ej	XC6121A341MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1B	-	R3116N321C	Vdet-IC	3.2V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1B	-	XC6108C41BMR	Vdet-IC	4.1V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E1B	ed	XC9215A11CM	DC-DC-IC	PWM st-dwn, 1.1V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E1B	ej	XC6121A342MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1C	-	R3116N331C	Vdet-IC	3.3V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1C	-	XC6108C41CMR	Vdet-IC	4.1V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E1C	ed	XC9215A12CM	DC-DC-IC	PWM st-dwn, 1.2V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E1C	ej	XC6121A343MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1D	-	R3116N341C	Vdet-IC	3.4V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1D	-	XC6108C41DMR	Vdet-IC	4.1V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E1D	ed	XC9215A13CM	DC-DC-IC	PWM st-dwn, 1.3V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E1D	ej	XC6121A344MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1E	-	R3116N351C	Vdet-IC	3.5V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1E	ed	XC9215A14CM	DC-DC-IC	PWM st-dwn, 1.4V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E1E	ej	XC6121A345MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1F	-	R3116N361C	Vdet-IC	3.6V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1F	eb	XC6367E153MR	DC-DC-IC	PWM step-up, 1.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E1F	ec	XC6121A316MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1F	ed	XC9215A15CM	DC-DC-IC	PWM st-dwn, 1.5V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E1F	ej	XC6121A346MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1G	-	R3116N371C	Vdet-IC	3.7V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1H	-	R3116N381C	Vdet-IC	3.8V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1H	eb	XC6367E163MR	DC-DC-IC	PWM step-up, 1.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E1H	ec	XC6121A317MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1H	ed	XC9215A16CM	DC-DC-IC	PWM st-dwn, 1.6V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E1H	ej	XC6121A347MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1J	-	R3116N391C	Vdet-IC	3.9V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E1K	-	R3116N401C	Vdet-IC	4V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1K	eb	XC6367E173MR	DC-DC-IC	PWM step-up, 1.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E1K	ec	XC6121A318MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1K	ed	XC9215A17CM	DC-DC-IC	PWM st-dwn, 1.7V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E1K	ej	XC6121A348MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1L	-	R3116N411C	Vdet-IC	4.1V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1L	eb	XC6367E183MR	DC-DC-IC	PWM step-up, 1.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E1L	ec	XC6121A319MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1L	ed	XC9215A18CM	DC-DC-IC	PWM st-dwn, 1.8V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E1L	ej	XC6121A349MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1M	-	R3116N421C	Vdet-IC	4.2V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1M	eb	XC6367E193MR	DC-DC-IC	PWM step-up, 1.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E1M	ec	XC6121A320MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1M	ed	XC9215A19CM	DC-DC-IC	PWM st-dwn, 1.9V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E1M	ej	XC6121A350MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1N	-	R3116N431C	Vdet-IC	4.3V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1N	ec	XC6121A321MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1P	-	R3116N441C	Vdet-IC	4.4V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1P	ec	XC6121A322MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1Q	-	R3116N451C	Vdet-IC	4.5V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1R	-	AP2121AK-1.3TRE1	LVR-IC	LDO, 1.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
E1R	-	R3116N461C	Vdet-IC	4.6V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1R	ec	XC6121A323MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1S	-	R3116N471C	Vdet-IC	4.7V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1S	ec	XC6121A324MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1T	-	AP2121AK-1.2TRE1	LVR-IC	LDO, 1.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
E1T	-	R3116N481C	Vdet-IC	4.8V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1T	ec	XC6121A325MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1U	-	AP2121AK-1.8TRE1	LVR-IC	LDO, 1.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
E1U	-	R3116N491C	Vdet-IC	4.9V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1U	ec	XC6121A326MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1V	-	AP2121AK-2.5TRE1	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
E1V	-	R3116N501C	Vdet-IC	5.0V±0.8%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E1V	ec	XC6121A327MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1W	-	AP2121AK-2.8TRE1	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
E1X	-	AP2121AK-3.0TRE1	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
E1X	ec	XC6121A328MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1Y	-	AP2121AK-3.3TRE1	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
E1Y	ec	XC6121A329MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E1Z	-	AP2121AK-1.5TRE1	LVR-IC	LDO, 1.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
E1Z	ec	XC6121A330MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
e2	-	BD45E322G-M	Vdet-IC	3.2V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
E2	-	BL8555-12EQ	LVR-IC	LDO, 1.2V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E2	-	BL8555-12ERA	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E2	-	BL8555-12ERB	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E2	-	ELM7S08B	CMOS-Log	2-input AND gate	SOT-25	28	Log3	6g	Elm
E2	-	LR8555-12EQ	LVR-IC	LDO, 1.2V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E2	-	LR8555-12ERA	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E2	-	LR8555-12ERB	LVR-IC	LDO, 1.2V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E2	-	RT9167-17CB	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
E2	-	TC7S08F	CMOS-Log	2-input AND gate	SSOP-5	28	Log3	6a	Tos
E2	-	TC7S08FU	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6a	Tos
E2	ea	BL8555-12PQ	LVR-IC	LDO, 1.2V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E2	ea	BL8555-12PRA	LVR-IC	LDO, 1.2V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E2	ea	BL8555-12PRB	LVR-IC	LDO, 1.2V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E2	ea	LR8555-12PQ	LVR-IC	LDO, 1.2V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E2	ea	LR8555-12PRA	LVR-IC	LDO, 1.2V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E2	ea	LR8555-12PRB	LVR-IC	LDO, 1.2V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E2	ea	RN5VD42AA	Vdet-IC	4.2V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E2	eu	BL8552CB5TR12	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E2	eu	BL8552CB5TR22	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E2	eu	BL8555-22PQ	LVR-IC	LDO, 2.2V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E2	eu	BL8555-22PRA	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E2	eu	BL8555-22PRB	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E2	eu	LR8555-22PQ	LVR-IC	LDO, 2.2V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E2	eu	LR8555-22PRA	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E2	eu	LR8555-22PRB	LVR-IC	LDO, 2.2V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E2	fg	BL8552CB5TR32	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E2	fg	BL8555-32PQ	LVR-IC	LDO, 3.2V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E2	fg	BL8555-32PRA	LVR-IC	LDO, 3.2V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E2	fg	BL8555-32PRB	LVR-IC	LDO, 3.2V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E2	fg	LR8555-32PQ	LVR-IC	LDO, 3.2V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E2	fg	LR8555-32PRA	LVR-IC	LDO, 3.2V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E2	fg	LR8555-32PRB	LVR-IC	LDO, 3.2V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E2	fh	BL8555-42PQ	LVR-IC	LDO, 4.2V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E2	fh	BL8555-42PRA	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E2	fh	BL8555-42PRB	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E2	fh	LR8555-42PQ	LVR-IC	LDO, 4.2V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E2	fh	LR8555-42PRA	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E2	fh	LR8555-42PRB	LVR-IC	LDO, 4.2V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E2	fk	BL8555-32EQ	LVR-IC	LDO, 3.2V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E2	fk	BL8555-32ERA	LVR-IC	LDO, 3.2V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E2	fk	BL8555-32ERB	LVR-IC	LDO, 3.2V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E2	fk	LR8555-32EQ	LVR-IC	LDO, 3.2V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E2	fk	LR8555-32ERA	LVR-IC	LDO, 3.2V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E2	fk	LR8555-32ERB	LVR-IC	LDO, 3.2V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E2	fm	BL8555-42EQ	LVR-IC	LDO, 4.2V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E2	fm	BL8555-42ERA	LVR-IC	LDO, 4.2V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E2	fm	BL8555-42ERB	LVR-IC	LDO, 4.2V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E2	fm	LR8555-42EQ	LVR-IC	LDO, 4.2V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E2	fm	LR8555-42ERA	LVR-IC	LDO, 4.2V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E2	fm	LR8555-42ERB	LVR-IC	LDO, 4.2V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E2	fp	BL8555-22EQ	LVR-IC	LDO, 2.2V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E2	fp	BL8555-22ERA	LVR-IC	LDO, 2.2V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E2	fp	BL8555-22ERB	LVR-IC	LDO, 2.2V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E2	fp	LR8555-22EQ	LVR-IC	LDO, 2.2V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E2	fp	LR8555-22ERA	LVR-IC	LDO, 2.2V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E2	fp	LR8555-22ERB	LVR-IC	LDO, 2.2V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E2-	-	RT9167-17PB	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
E20	-	RP173N201B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E20	eb	XC6367E202MR	DC-DC-IC	PWM step-up, 2.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E20	ed	XC9215A206M	DC-DC-IC	PWM st-dwn, 2.0V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E20	ej	XC6121A431MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E21	-	RP173N211B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E21	eb	XC6367E212MR	DC-DC-IC	PWM step-up, 2.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E21	ed	XC9215A216M	DC-DC-IC	PWM st-dwn, 2.1V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E21	ej	XC6121A432MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E22	-	RP173N221B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E22	eb	XC6367E222MR	DC-DC-IC	PWM step-up, 2.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E22	ed	XC9215A226M	DC-DC-IC	PWM st-dwn, 2.2V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E22	ej	XC6121A433MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E23	-	RP173N231B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E23	-	TC53C4202ECT	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
E23	eb	XC6367E232MR	DC-DC-IC	PWM step-up, 2.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E23	ed	XC9215A236M	DC-DC-IC	PWM st-dwn, 2.3V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E23	ej	XC6121A434MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E24	-	RP173N241B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E24	eb	XC6367E242MR	DC-DC-IC	PWM step-up, 2.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E24	ed	XC9215A246M	DC-DC-IC	PWM st-dwn, 2.4V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E24	ej	XC6121A435MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E25	-	R1224N252E	DC-DC-IC	PWM/VFM step-down, 2.5V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
E25	-	RP173N251B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E25	eb	XC6367E252MR	DC-DC-IC	PWM step-up, 2.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E25	ed	XC9215A256M	DC-DC-IC	PWM st-dwn, 2.5V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E25	ej	XC6121A436MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E26	-	RP173N261B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E26	eb	XC6367E262MR	DC-DC-IC	PWM step-up, 2.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E26	ed	XC9215A266M	DC-DC-IC	PWM st-dwn, 2.6V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E26	ej	XC6121A437MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E27	-	RP173N271B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E27	eb	XC6367E272MR	DC-DC-IC	PWM step-up, 2.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E27	ed	XC9215A276M	DC-DC-IC	PWM st-dwn, 2.7V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E27	ej	XC6121A438MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E28	-	RP173N281B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E28	eb	XC6367E282MR	DC-DC-IC	PWM step-up, 2.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E28	ed	XC9215A286M	DC-DC-IC	PWM st-dwn, 2.8V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E28	ej	XC6121A439MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E29	-	RP173N291B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E29	eb	XC6367E292MR	DC-DC-IC	PWM step-up, 2.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E29	ed	XC9215A296M	DC-DC-IC	PWM st-dwn, 2.9V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E29	ej	XC6121A440MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2A	-	XC6108C42AMR	Vdet-IC	4.2V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E2A	eb	XC6367E203MR	DC-DC-IC	PWM step-up, 2.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E2A	ed	XC9215A20CM	DC-DC-IC	PWM st-dwn, 2.0V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E2A	ej	XC6121A441MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2B	-	XC6108C42BMR	Vdet-IC	4.2V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E2B	eb	XC6367E213MR	DC-DC-IC	PWM step-up, 2.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E2B	ed	XC9215A21CM	DC-DC-IC	PWM st-dwn, 2.1V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E2B	ej	XC6121A442MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2C	-	XC6108C42CMR	Vdet-IC	4.2V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E2C	eb	XC6367E223MR	DC-DC-IC	PWM step-up, 2.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E2C	ed	XC9215A22CM	DC-DC-IC	PWM st-dwn, 2.2V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E2C	ej	XC6121A443MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2D	-	XC6108C42DMR	Vdet-IC	4.2V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E2D	eb	XC6367E233MR	DC-DC-IC	PWM step-up, 2.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E2D	ed	XC9215A23CM	DC-DC-IC	PWM st-dwn, 2.3V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E2D	ej	XC6121A444MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2E	eb	XC6367E243MR	DC-DC-IC	PWM step-up, 2.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E2E	ed	XC9215A24CM	DC-DC-IC	PWM st-dwn, 2.4V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E2E	ej	XC6121A445MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2F	eb	XC6367E253MR	DC-DC-IC	PWM step-up, 2.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E2F	ec	XC6121A416MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2F	ed	XC9215A25CM	DC-DC-IC	PWM st-dwn, 2.5V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E2F	ej	XC6121A446MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2H	eb	XC6367E263MR	DC-DC-IC	PWM step-up, 2.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E2H	ec	XC6121A417MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2H	ed	XC9215A26CM	DC-DC-IC	PWM st-dwn, 2.6V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E2H	ej	XC6121A447MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2K	eb	XC6367E273MR	DC-DC-IC	PWM step-up, 2.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E2K	ec	XC6121A418MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2K	ed	XC9215A27CM	DC-DC-IC	PWM st-dwn, 2.7V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E2K	ej	XC6121A448MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2L	eb	XC6367E283MR	DC-DC-IC	PWM step-up, 2.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E2L	ec	XC6121A419MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2L	ed	XC9215A28CM	DC-DC-IC	PWM st-dwn, 2.8V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E2L	ej	XC6121A449MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2M	eb	XC6367E293MR	DC-DC-IC	PWM step-up, 2.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E2M	ec	XC6121A420MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2M	ed	XC9215A29CM	DC-DC-IC	PWM st-dwn, 2.9V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E2M	ej	XC6121A450MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2N	ec	XC6121A421MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2P	ec	XC6121A422MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2R	ec	XC6121A423MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2S	ec	XC6121A424MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2T	ec	XC6121A425MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2U	ec	XC6121A426MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2V	ec	XC6121A427MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2X	ec	XC6121A428MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2Y	ec	XC6121A429MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E2Z	ec	XC6121A430MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
e3	-	BD45E332G-M	Vdet-IC	3.3V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
e3	-	NX3V1T384GW	CMOS-Log	Single-pole single-throw analog switch	SOT-353-1	28	Log86	6a	Nxp
E3	-	BL8555-13EQ	LVR-IC	LDO, 1.3V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E3	-	BL8555-13ERA	LVR-IC	LDO, 1.3V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E3	-	BL8555-13ERB	LVR-IC	LDO, 1.3V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E3	-	ELM7S02B	CMOS-Log	2-input NOR gate	SOT-25	28	Log2	6g	Elm
E3	-	LR8555-13EQ	LVR-IC	LDO, 1.3V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E3	-	LR8555-13ERA	LVR-IC	LDO, 1.3V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E3	-	LR8555-13ERB	LVR-IC	LDO, 1.3V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E3	-	RT9167-18CB	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
E3	-	TC7S02F	CMOS-Log	2-input NOR gate	SSOP-5	28	Log2	6a	Tos
E3	-	TC7S02FU	CMOS-Log	2-input NOR gate	SC-70-5	28	Log2	6a	Tos
E3	ea	BL8555-13PQ	LVR-IC	LDO, 1.3V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E3	ea	BL8555-13PRA	LVR-IC	LDO, 1.3V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E3	ea	BL8555-13PRB	LVR-IC	LDO, 1.3V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E3	ea	LR8555-13PQ	LVR-IC	LDO, 1.3V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E3	ea	LR8555-13PRA	LVR-IC	LDO, 1.3V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E3	ea	LR8555-13PRB	LVR-IC	LDO, 1.3V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E3	ea	RN5VD43AA	Vdet-IC	4.3V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E3	eu	BL8552CB5TR13	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E3	eu	BL8552CB5TR23	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E3	eu	BL8555-23PQ	LVR-IC	LDO, 2.3V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E3	eu	BL8555-23PRA	LVR-IC	LDO, 2.3V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E3	eu	BL8555-23PRB	LVR-IC	LDO, 2.3V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E3	eu	LR8555-23PQ	LVR-IC	LDO, 2.3V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E3	eu	LR8555-23PRA	LVR-IC	LDO, 2.3V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E3	eu	LR8555-23PRB	LVR-IC	LDO, 2.3V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E3	fg	BL8552CB5TR33	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E3	fg	BL8555-33PQ	LVR-IC	LDO, 3.3V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E3	fg	BL8555-33PRA	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E3	fg	BL8555-33PRB	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E3	fg	LR8555-33PQ	LVR-IC	LDO, 3.3V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E3	fg	LR8555-33PRA	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E3	fg	LR8555-33PRB	LVR-IC	LDO, 3.3V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E3	fh	BL8555-43PQ	LVR-IC	LDO, 4.3V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E3	fh	BL8555-43PRA	LVR-IC	LDO, 4.3V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E3	fh	BL8555-43PRB	LVR-IC	LDO, 4.3V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E3	fh	LR8555-43PQ	LVR-IC	LDO, 4.3V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E3	fh	LR8555-43PRA	LVR-IC	LDO, 4.3V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E3	fh	LR8555-43PRB	LVR-IC	LDO, 4.3V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E3	fk	BL8555-33EQ	LVR-IC	LDO, 3.3V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E3	fk	BL8555-33ERA	LVR-IC	LDO, 3.3V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E3	fk	BL8555-33ERB	LVR-IC	LDO, 3.3V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E3	fk	LR8555-33EQ	LVR-IC	LDO, 3.3V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E3	fk	LR8555-33ERA	LVR-IC	LDO, 3.3V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E3	fk	LR8555-33ERB	LVR-IC	LDO, 3.3V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E3	fm	BL8555-43EQ	LVR-IC	LDO, 4.3V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E3	fm	BL8555-43ERA	LVR-IC	LDO, 4.3V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E3	fm	BL8555-43ERB	LVR-IC	LDO, 4.3V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E3	fm	LR8555-43EQ	LVR-IC	LDO, 4.3V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E3	fm	LR8555-43ERA	LVR-IC	LDO, 4.3V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E3	fm	LR8555-43ERB	LVR-IC	LDO, 4.3V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E3	fp	BL8555-23EQ	LVR-IC	LDO, 2.3V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E3	fp	BL8555-23ERA	LVR-IC	LDO, 2.3V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E3	fp	BL8555-23ERB	LVR-IC	LDO, 2.3V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E3	fp	LR8555-23EQ	LVR-IC	LDO, 2.3V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E3	fp	LR8555-23ERA	LVR-IC	LDO, 2.3V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E3	fp	LR8555-23ERB	LVR-IC	LDO, 2.3V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E3-	-	RT9167-18PB	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
E30	-	R1224N302E	DC-DC-IC	PWM/VFM step-down, 3V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
E30	-	RP173N301B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E30	eb	XC6367E302MR	DC-DC-IC	PWM step-up, 3.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E30	ed	XC9215A306M	DC-DC-IC	PWM st-dwn, 3.0V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E30	ej	XC6121A531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E31	-	RP173N311B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E31	eb	XC6367E312MR	DC-DC-IC	PWM step-up, 3.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E31	ed	XC9215A316M	DC-DC-IC	PWM st-dwn, 3.1V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E31	ej	XC6121A532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E32	-	RP173N321B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E32	eb	XC6367E322MR	DC-DC-IC	PWM step-up, 3.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E32	ed	XC9215A326M	DC-DC-IC	PWM st-dwn, 3.2V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E32	ej	XC6121A533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E33	-	R1224N332E	DC-DC-IC	PWM/VFM step-down, 3.3V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
E33	-	RP173N331B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E33	-	TC53C4302ECT	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
E33	eb	XC6367E332MR	DC-DC-IC	PWM step-up, 3.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E33	ed	XC9215A336M	DC-DC-IC	PWM st-dwn, 3.3V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E33	ej	XC6121A534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E34	-	RP173N341B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E34	eb	XC6367E342MR	DC-DC-IC	PWM step-up, 3.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E34	ed	XC9215A346M	DC-DC-IC	PWM st-dwn, 3.4V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E34	ej	XC6121A535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E35	-	RP173N351B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E35	eb	XC6367E352MR	DC-DC-IC	PWM step-up, 3.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E35	ed	XC9215A356M	DC-DC-IC	PWM st-dwn, 3.5V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E35	ej	XC6121A536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E36	-	RP173N361B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E36	eb	XC6367E362MR	DC-DC-IC	PWM step-up, 3.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E36	ed	XC9215A366M	DC-DC-IC	PWM st-dwn, 3.6V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E36	ej	XC6121A537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E37	-	OPA137N	Op-IC	FET-Input, ±2.25..±18V, 1MHz	SOT-23-5	28opa	OP1	6a	Bb
E37	-	RP173N371B	LVR-IC	LDO, 3.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E37	eb	XC6367E372MR	DC-DC-IC	PWM step-up, 3.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E37	ed	XC9215A376M	DC-DC-IC	PWM st-dwn, 3.7V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E37	ej	XC6121A538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E38	-	RP173N381B	LVR-IC	LDO, 3.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E38	eb	XC6367E382MR	DC-DC-IC	PWM step-up, 3.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E38	ed	XC9215A386M	DC-DC-IC	PWM st-dwn, 3.8V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E38	ej	XC6121A539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E39	-	RP173N391B	LVR-IC	LDO, 3.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E39	eb	XC6367E392MR	DC-DC-IC	PWM step-up, 3.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E39	ed	XC9215A396M	DC-DC-IC	PWM st-dwn, 3.9V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E39	ej	XC6121A540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3A	-	XC6108C43AMR	Vdet-IC	4.3V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E3A	eb	XC6367E303MR	DC-DC-IC	PWM step-up, 3.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E3A	ed	XC9215A30CM	DC-DC-IC	PWM st-dwn, 3.0V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E3A	ej	XC6121A541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3B	-	XC6108C43BMR	Vdet-IC	4.3V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E3B	eb	XC6367E313MR	DC-DC-IC	PWM step-up, 3.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E3B	ed	XC9215A31CM	DC-DC-IC	PWM st-dwn, 3.1V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E3B	ej	XC6121A542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3C	-	XC6108C43CMR	Vdet-IC	4.3V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E3C	eb	XC6367E323MR	DC-DC-IC	PWM step-up, 3.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E3C	ed	XC9215A32CM	DC-DC-IC	PWM st-dwn, 3.2V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E3C	ej	XC6121A543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3D	-	XC6108C43DMR	Vdet-IC	4.3V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E3D	eb	XC6367E333MR	DC-DC-IC	PWM step-up, 3.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E3D	ed	XC9215A33CM	DC-DC-IC	PWM st-dwn, 3.3V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E3D	ej	XC6121A544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3E	eb	XC6367E343MR	DC-DC-IC	PWM step-up, 3.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E3E	ed	XC9215A34CM	DC-DC-IC	PWM st-dwn, 3.4V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E3E	ej	XC6121A545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3F	eb	XC6367E353MR	DC-DC-IC	PWM step-up, 3.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E3F	ec	XC6121A516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3F	ed	XC9215A35CM	DC-DC-IC	PWM st-dwn, 3.5V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E3F	ej	XC6121A546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3H	eb	XC6367E363MR	DC-DC-IC	PWM step-up, 3.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E3H	ec	XC6121A517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3H	ed	XC9215A36CM	DC-DC-IC	PWM st-dwn, 3.6V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E3H	ej	XC6121A547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3K	eb	XC6367E373MR	DC-DC-IC	PWM step-up, 3.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E3K	ec	XC6121A518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3K	ed	XC9215A37CM	DC-DC-IC	PWM st-dwn, 3.7V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E3K	ej	XC6121A548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3L	eb	XC6367E383MR	DC-DC-IC	PWM step-up, 3.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E3L	ec	XC6121A519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3L	ed	XC9215A38CM	DC-DC-IC	PWM st-dwn, 3.8V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E3L	ej	XC6121A549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3M	eb	XC6367E393MR	DC-DC-IC	PWM step-up, 3.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E3M	ec	XC6121A520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3M	ed	XC9215A39CM	DC-DC-IC	PWM st-dwn, 3.9V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E3M	ej	XC6121A550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3N	ec	XC6121A521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3P	ec	XC6121A522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3R	ec	XC6121A523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3S	ec	XC6121A524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3T	ec	XC6121A525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3U	ec	XC6121A526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3V	ec	XC6121A527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3X	ec	XC6121A528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3Y	ec	XC6121A529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E3Z	-	AP2121AK-3.2TRE1	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
E3Z	ec	XC6121A530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
e4	-	BD45E342G-M	Vdet-IC	3.4V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
E4	-	BL8555-14EQ	LVR-IC	LDO, 1.4V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E4	-	BL8555-14ERA	LVR-IC	LDO, 1.4V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E4	-	BL8555-14ERB	LVR-IC	LDO, 1.4V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E4	-	ELM7S32B	CMOS-Log	2-input OR gate	SOT-25	28	Log4	6g	Elm
E4	-	LR8555-14EQ	LVR-IC	LDO, 1.4V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E4	-	LR8555-14ERA	LVR-IC	LDO, 1.4V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E4	-	LR8555-14ERB	LVR-IC	LDO, 1.4V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E4	-	RT9167-19CB	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
E4	-	TC7S32F	CMOS-Log	2-input OR gate	SSOP-5	28	Log4	6a	Tos
E4	-	TC7S32FU	CMOS-Log	2-input OR gate	SC-70-5	28	Log4	6a	Tos
E4	ea	BL8555-14PQ	LVR-IC	LDO, 1.4V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E4	ea	BL8555-14PRA	LVR-IC	LDO, 1.4V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E4	ea	BL8555-14PRB	LVR-IC	LDO, 1.4V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E4	ea	LR8555-14PQ	LVR-IC	LDO, 1.4V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E4	ea	LR8555-14PRA	LVR-IC	LDO, 1.4V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E4	ea	LR8555-14PRB	LVR-IC	LDO, 1.4V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E4	ea	RN5VD44AA	Vdet-IC	4.4V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E4	eu	BL8552CB5TR14	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E4	eu	BL8552CB5TR24	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E4	eu	BL8555-24PQ	LVR-IC	LDO, 2.4V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E4	eu	BL8555-24PRA	LVR-IC	LDO, 2.4V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E4	eu	BL8555-24PRB	LVR-IC	LDO, 2.4V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E4	eu	LR8555-24PQ	LVR-IC	LDO, 2.4V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E4	eu	LR8555-24PRA	LVR-IC	LDO, 2.4V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E4	eu	LR8555-24PRB	LVR-IC	LDO, 2.4V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E4	fg	BL8552CB5TR34	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E4	fg	BL8555-34PQ	LVR-IC	LDO, 3.4V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E4	fg	BL8555-34PRA	LVR-IC	LDO, 3.4V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E4	fg	BL8555-34PRB	LVR-IC	LDO, 3.4V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E4	fg	LR8555-34PQ	LVR-IC	LDO, 3.4V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E4	fg	LR8555-34PRA	LVR-IC	LDO, 3.4V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E4	fg	LR8555-34PRB	LVR-IC	LDO, 3.4V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E4	fh	BL8555-44PQ	LVR-IC	LDO, 4.4V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E4	fh	BL8555-44PRA	LVR-IC	LDO, 4.4V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E4	fh	BL8555-44PRB	LVR-IC	LDO, 4.4V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E4	fh	LR8555-44PQ	LVR-IC	LDO, 4.4V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E4	fh	LR8555-44PRA	LVR-IC	LDO, 4.4V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E4	fh	LR8555-44PRB	LVR-IC	LDO, 4.4V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E4	fk	BL8555-34EQ	LVR-IC	LDO, 3.4V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E4	fk	BL8555-34ERB	LVR-IC	LDO, 3.4V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E4	fk	BL8555-34PEA	LVR-IC	LDO, 3.4V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E4	fk	LR8555-34EQ	LVR-IC	LDO, 3.4V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E4	fk	LR8555-34ERB	LVR-IC	LDO, 3.4V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E4	fk	LR8555-34PEA	LVR-IC	LDO, 3.4V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E4	fm	BL8555-44EQ	LVR-IC	LDO, 4.4V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E4	fm	BL8555-44ERA	LVR-IC	LDO, 4.4V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E4	fm	BL8555-44ERB	LVR-IC	LDO, 4.4V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E4	fm	LR8555-44EQ	LVR-IC	LDO, 4.4V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E4	fm	LR8555-44ERA	LVR-IC	LDO, 4.4V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E4	fm	LR8555-44ERB	LVR-IC	LDO, 4.4V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E4	fp	BL8555-24EQ	LVR-IC	LDO, 2.4V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E4	fp	BL8555-24ERA	LVR-IC	LDO, 2.4V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E4	fp	BL8555-24ERB	LVR-IC	LDO, 2.4V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E4	fp	LR8555-24EQ	LVR-IC	LDO, 2.4V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E4	fp	LR8555-24ERA	LVR-IC	LDO, 2.4V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E4	fp	LR8555-24ERB	LVR-IC	LDO, 2.4V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E40	-	RP173N401B	LVR-IC	LDO, 4.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E40	eb	XC6367E402MR	DC-DC-IC	PWM step-up, 4.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E40	ed	XC9215A406M	DC-DC-IC	PWM st-dwn, 4.0V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E40	ej	XC6121A731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E41	-	RP173N411B	LVR-IC	LDO, 4.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E41	eb	XC6367E412MR	DC-DC-IC	PWM step-up, 4.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E41	ej	XC6121A732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E42	-	RP173N421B	LVR-IC	LDO, 4.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E42	eb	XC6367E422MR	DC-DC-IC	PWM step-up, 4.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E42	ej	XC6121A733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E43	-	RP173N431B	LVR-IC	LDO, 4.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E43	-	TC53C4402ECT	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
E43	eb	XC6367E432MR	DC-DC-IC	PWM step-up, 4.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E43	ej	XC6121A734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E43A	-	LM431BN5	Vref-IC	Adjust, Precision, Shunt, 2.44..2.55V±0.4%	SOT-23-5	28re	RF2	6a	Ttr
E43B	-	LM431AN5	Vref-IC	Adjust, Precision, Shunt, 2.44..2.55V±0.8%	SOT-23-5	28re	RF2	6a	Ttr
E44	-	RP173N441B	LVR-IC	LDO, 4.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E44	eb	XC6367E442MR	DC-DC-IC	PWM step-up, 4.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E44	ej	XC6121A735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E45	-	RP173N451B	LVR-IC	LDO, 4.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E45	eb	XC6367E452MR	DC-DC-IC	PWM step-up, 4.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E45	ej	XC6121A736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E46	-	RP173N461B	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E46	eb	XC6367E462MR	DC-DC-IC	PWM step-up, 4.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E46	ej	XC6121A737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E47	-	RP173N471B	LVR-IC	LDO, 4.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E47	eb	XC6367E472MR	DC-DC-IC	PWM step-up, 4.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E47	ej	XC6121A738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E48	-	RP173N481B	LVR-IC	LDO, 4.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E48	eb	XC6367E482MR	DC-DC-IC	PWM step-up, 4.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E48	ej	XC6121A739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E49	-	RP173N491B	LVR-IC	LDO, 4.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E49	eb	XC6367E492MR	DC-DC-IC	PWM step-up, 4.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E49	ej	XC6121A740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4A	-	XC6108C44AMR	Vdet-IC	4.4V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E4A	eb	XC6367E403MR	DC-DC-IC	PWM step-up, 4.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E4A	ed	XC9215A40CM	DC-DC-IC	PWM st-dwn, 4.0V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
E4A	ej	XC6121A741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4B	-	XC6108C44BMR	Vdet-IC	4.4V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E4B	eb	XC6367E413MR	DC-DC-IC	PWM step-up, 4.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E4B	ej	XC6121A742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4C	-	XC6108C44CMR	Vdet-IC	4.4V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E4C	eb	XC6367E423MR	DC-DC-IC	PWM step-up, 4.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E4C	ej	XC6121A743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4D	-	XC6108C44DMR	Vdet-IC	4.4V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E4D	eb	XC6367E433MR	DC-DC-IC	PWM step-up, 4.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E4D	ej	XC6121A744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4E	eb	XC6367E443MR	DC-DC-IC	PWM step-up, 4.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E4E	ej	XC6121A745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4F	eb	XC6367E453MR	DC-DC-IC	PWM step-up, 4.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E4F	ec	XC6121A716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4F	ej	XC6121A746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4H	eb	XC6367E463MR	DC-DC-IC	PWM step-up, 4.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E4H	ec	XC6121A717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4H	ej	XC6121A747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4K	eb	XC6367E473MR	DC-DC-IC	PWM step-up, 4.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E4K	ec	XC6121A718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4K	ej	XC6121A748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4L	eb	XC6367E483MR	DC-DC-IC	PWM step-up, 4.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E4L	ec	XC6121A719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4L	ej	XC6121A749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4M	eb	XC6367E493MR	DC-DC-IC	PWM step-up, 4.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E4M	ec	XC6121A720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4M	ej	XC6121A750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4N	ec	XC6121A721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4P	ec	XC6121A722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4R	ec	XC6121A723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4S	ec	XC6121A724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4T	ec	XC6121A725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4U	ec	XC6121A726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4V	ec	XC6121A727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4X	ec	XC6121A728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4Y	ec	XC6121A729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E4Z	ec	XC6121A730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
e5	-	BD45E352G-M	Vdet-IC	3.5V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
E5	-	BL8555-15EQ	LVR-IC	LDO, 1.5V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E5	-	BL8555-15ERA	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E5	-	BL8555-15ERB	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E5	-	ELM7S04B	CMOS-Log	Inverter	SOT-25	28	Log6	6g	Elm
E5	-	LR8555-15EQ	LVR-IC	LDO, 1.5V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E5	-	LR8555-15ERA	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E5	-	LR8555-15ERB	LVR-IC	LDO, 1.5V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E5	-	R1111N151A	LVR-IC	LDO, Low noise, 1.5V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
E5	-	RT9167-20CB	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
E5	-	TC7S04F	CMOS-Log	Inverter	SSOP-5	28	Log6	6a	Tos
E5	-	TC7S04FU	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	Tos
E5	ea	BL8555-15PQ	LVR-IC	LDO, 1.5V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E5	ea	BL8555-15PRA	LVR-IC	LDO, 1.5V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E5	ea	BL8555-15PRB	LVR-IC	LDO, 1.5V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E5	ea	LR8555-15PQ	LVR-IC	LDO, 1.5V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E5	ea	LR8555-15PRA	LVR-IC	LDO, 1.5V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E5	ea	LR8555-15PRB	LVR-IC	LDO, 1.5V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E5	ea	RN5VD45AA	Vdet-IC	4.5V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E5	eu	BL8552CB5TR15	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E5	eu	BL8552CB5TR25	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E5	eu	BL8555-25PQ	LVR-IC	LDO, 2.5V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E5	eu	BL8555-25PRA	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E5	eu	BL8555-25PRB	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E5	eu	LR8555-25PQ	LVR-IC	LDO, 2.5V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E5	eu	LR8555-25PRA	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E5	eu	LR8555-25PRB	LVR-IC	LDO, 2.5V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E5	fg	BL8552CB5TR35	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E5	fg	BL8555-35PQ	LVR-IC	LDO, 3.5V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E5	fg	BL8555-35PRA	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E5	fg	BL8555-35PRB	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E5	fg	LR8555-35PQ	LVR-IC	LDO, 3.5V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E5	fg	LR8555-35PRA	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E5	fg	LR8555-35PRB	LVR-IC	LDO, 3.5V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E5	fh	BL8555-45PQ	LVR-IC	LDO, 4.5V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E5	fh	BL8555-45PRA	LVR-IC	LDO, 4.5V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E5	fh	BL8555-45PRB	LVR-IC	LDO, 4.5V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E5	fh	LR8555-45PQ	LVR-IC	LDO, 4.5V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E5	fh	LR8555-45PRA	LVR-IC	LDO, 4.5V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E5	fh	LR8555-45PRB	LVR-IC	LDO, 4.5V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E5	fk	BL8555-35EQ	LVR-IC	LDO, 3.5V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E5	fk	BL8555-35ERA	LVR-IC	LDO, 3.5V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E5	fk	BL8555-35ERB	LVR-IC	LDO, 3.5V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E5	fk	LR8555-35EQ	LVR-IC	LDO, 3.5V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E5	fk	LR8555-35ERA	LVR-IC	LDO, 3.5V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E5	fk	LR8555-35ERB	LVR-IC	LDO, 3.5V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E5	fm	BL8555-45EQ	LVR-IC	LDO, 4.5V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E5	fm	BL8555-45ERA	LVR-IC	LDO, 4.5V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E5	fm	BL8555-45ERB	LVR-IC	LDO, 4.5V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E5	fm	LR8555-45EQ	LVR-IC	LDO, 4.5V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E5	fm	LR8555-45ERA	LVR-IC	LDO, 4.5V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E5	fm	LR8555-45ERB	LVR-IC	LDO, 4.5V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E5	fp	BL8555-25EQ	LVR-IC	LDO, 2.5V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E5	fp	BL8555-25ERA	LVR-IC	LDO, 2.5V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E5	fp	BL8555-25ERB	LVR-IC	LDO, 2.5V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E5	fp	LR8555-25EQ	LVR-IC	LDO, 2.5V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E5	fp	LR8555-25ERA	LVR-IC	LDO, 2.5V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E5	fp	LR8555-25ERB	LVR-IC	LDO, 2.5V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E5-	-	RT9167-20PB	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
E50	-	R1224N502E	DC-DC-IC	PWM/VFM step-down, 5V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
E50	-	RP173N501B	LVR-IC	LDO, 5.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E50	eb	XC6367E502MR	DC-DC-IC	PWM step-up, 5.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E50	ej	XC6121A631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E51	-	RP173N511B	LVR-IC	LDO, 5.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E51	eb	XC6367E512MR	DC-DC-IC	PWM step-up, 5.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E51	ej	XC6121A632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E52	-	RP173N521B	LVR-IC	LDO, 5.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E52	eb	XC6367E522MR	DC-DC-IC	PWM step-up, 5.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E52	ej	XC6121A633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E53	-	RP173N531B	LVR-IC	LDO, 5.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E53	-	TC53C4502ECT	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
E53	eb	XC6367E532MR	DC-DC-IC	PWM step-up, 5.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E53	ej	XC6121A634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E54	-	RP173N541B	LVR-IC	LDO, 5.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E54	eb	XC6367E542MR	DC-DC-IC	PWM step-up, 5.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E54	ej	XC6121A635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E55	-	R1224N552E	DC-DC-IC	PWM/VFM step-down, 5.5V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
E55	-	RP173N551B	LVR-IC	LDO, 5.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
E55	eb	XC6367E552MR	DC-DC-IC	PWM step-up, 5.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E55	ej	XC6121A636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E56	eb	XC6367E562MR	DC-DC-IC	PWM step-up, 5.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E56	ej	XC6121A637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E57	eb	XC6367E572MR	DC-DC-IC	PWM step-up, 5.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E57	ej	XC6121A638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E58	eb	XC6367E582MR	DC-DC-IC	PWM step-up, 5.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E58	ej	XC6121A639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E59	eb	XC6367E592MR	DC-DC-IC	PWM step-up, 5.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E59	ej	XC6121A640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5A	-	XC6108C45AMR	Vdet-IC	4.5V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E5A	eb	XC6367E503MR	DC-DC-IC	PWM step-up, 5.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E5A	ej	XC6121A641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5B	-	XC6108C45BMR	Vdet-IC	4.5V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E5B	eb	XC6367E513MR	DC-DC-IC	PWM step-up, 5.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E5B	ej	XC6121A642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5C	-	XC6108C45CMR	Vdet-IC	4.5V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E5C	eb	XC6367E523MR	DC-DC-IC	PWM step-up, 5.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E5C	ej	XC6121A643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5D	-	XC6108C45DMR	Vdet-IC	4.5V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E5D	eb	XC6367E533MR	DC-DC-IC	PWM step-up, 5.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E5D	ej	XC6121A644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5E	eb	XC6367E543MR	DC-DC-IC	PWM step-up, 5.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E5E	ej	XC6121A645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5F	eb	XC6367E553MR	DC-DC-IC	PWM step-up, 5.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E5F	ec	XC6121A616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5F	ej	XC6121A646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5H	eb	XC6367E563MR	DC-DC-IC	PWM step-up, 5.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E5H	ec	XC6121A617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5H	ej	XC6121A647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5K	eb	XC6367E573MR	DC-DC-IC	PWM step-up, 5.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E5K	ec	XC6121A618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5K	ej	XC6121A648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5L	eb	XC6367E583MR	DC-DC-IC	PWM step-up, 5.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E5L	ec	XC6121A619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5L	ej	XC6121A649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5M	eb	XC6367E593MR	DC-DC-IC	PWM step-up, 5.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E5M	ec	XC6121A620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5M	ej	XC6121A650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5N	ec	XC6121A621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5P	ec	XC6121A622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5R	ec	XC6121A623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5S	ec	XC6121A624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5T	ec	XC6121A625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5U	ec	XC6121A626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5V	ec	XC6121A627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5X	ec	XC6121A628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5Y	ec	XC6121A629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
E5Z	ec	XC6121A630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
e6	-	BD45E362G-M	Vdet-IC	3.6V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
E6	-	BL8555-16EQ	LVR-IC	LDO, 1.6V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E6	-	BL8555-16ERA	LVR-IC	LDO, 1.6V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E6	-	BL8555-16ERB	LVR-IC	LDO, 1.6V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E6	-	ELM7SU04B	CMOS-Log	Unbuffered Inverter	SOT-25	28	Log6	6g	Elm
E6	-	LR8555-16EQ	LVR-IC	LDO, 1.6V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E6	-	LR8555-16ERA	LVR-IC	LDO, 1.6V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E6	-	LR8555-16ERB	LVR-IC	LDO, 1.6V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E6	-	R1111N161A	LVR-IC	LDO, Low noise, 1.6V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
E6	-	RT9167-21CB	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
E6	-	TC7SU04F	CMOS-Log	Inverter	SSOP-5	28	Log6	6a	Tos
E6	-	TC7SU04FU	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	Tos
E6	ea	BL8555-16PQ	LVR-IC	LDO, 1.6V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E6	ea	BL8555-16PRA	LVR-IC	LDO, 1.6V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E6	ea	BL8555-16PRB	LVR-IC	LDO, 1.6V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E6	ea	LR8555-16PQ	LVR-IC	LDO, 1.6V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E6	ea	LR8555-16PRA	LVR-IC	LDO, 1.6V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E6	ea	LR8555-16PRB	LVR-IC	LDO, 1.6V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E6	ea	RN5VD46AA	Vdet-IC	4.6V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E6	eu	BL8552CB5TR16	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E6	eu	BL8552CB5TR26	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E6	eu	BL8555-26PQ	LVR-IC	LDO, 2.6V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E6	eu	BL8555-26PRA	LVR-IC	LDO, 2.6V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E6	eu	BL8555-26PRB	LVR-IC	LDO, 2.6V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E6	eu	LR8555-26PQ	LVR-IC	LDO, 2.6V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E6	eu	LR8555-26PRA	LVR-IC	LDO, 2.6V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E6	eu	LR8555-26PRB	LVR-IC	LDO, 2.6V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E6	fg	BL8552CB5TR36	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E6	fg	BL8555-36PQ	LVR-IC	LDO, 3.6V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E6	fg	BL8555-36PRA	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E6	fg	BL8555-36PRB	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E6	fg	LR8555-36PQ	LVR-IC	LDO, 3.6V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E6	fg	LR8555-36PRA	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E6	fg	LR8555-36PRB	LVR-IC	LDO, 3.6V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E6	fh	BL8555-46PQ	LVR-IC	LDO, 4.6V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E6	fh	BL8555-46PRA	LVR-IC	LDO, 4.6V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E6	fh	BL8555-46PRB	LVR-IC	LDO, 4.6V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E6	fh	LR8555-46PQ	LVR-IC	LDO, 4.6V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E6	fh	LR8555-46PRA	LVR-IC	LDO, 4.6V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E6	fh	LR8555-46PRB	LVR-IC	LDO, 4.6V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E6	fk	BL8555-36EQ	LVR-IC	LDO, 3.6V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E6	fk	BL8555-36ERA	LVR-IC	LDO, 3.6V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E6	fk	BL8555-36ERB	LVR-IC	LDO, 3.6V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E6	fk	LR8555-36EQ	LVR-IC	LDO, 3.6V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E6	fk	LR8555-36ERA	LVR-IC	LDO, 3.6V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E6	fk	LR8555-36ERB	LVR-IC	LDO, 3.6V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E6	fm	BL8555-46EQ	LVR-IC	LDO, 4.6V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E6	fm	BL8555-46ERA	LVR-IC	LDO, 4.6V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E6	fm	BL8555-46ERB	LVR-IC	LDO, 4.6V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E6	fm	LR8555-46EQ	LVR-IC	LDO, 4.6V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E6	fm	LR8555-46ERA	LVR-IC	LDO, 4.6V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E6	fm	LR8555-46ERB	LVR-IC	LDO, 4.6V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E6	fp	BL8555-26EQ	LVR-IC	LDO, 2.6V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E6	fp	BL8555-26ERA	LVR-IC	LDO, 2.6V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E6	fp	BL8555-26ERB	LVR-IC	LDO, 2.6V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E6	fp	LR8555-26EQ	LVR-IC	LDO, 2.6V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E6	fp	LR8555-26ERA	LVR-IC	LDO, 2.6V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E6	fp	LR8555-26ERB	LVR-IC	LDO, 2.6V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E60	-	R1224N602E	DC-DC-IC	PWM/VFM step-down, 6V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
E60	eb	XC6367E602MR	DC-DC-IC	PWM step-up, 6.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E60	ej	XC6121C231MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E61	eb	XC6367E612MR	DC-DC-IC	PWM step-up, 6.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E61	ej	XC6121C232MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E62	eb	XC6367E622MR	DC-DC-IC	PWM step-up, 6.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E62	ej	XC6121C233MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E63	-	TC53C4602ECT	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
E63	eb	XC6367E632MR	DC-DC-IC	PWM step-up, 6.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E63	ej	XC6121C234MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E64	eb	XC6367E642MR	DC-DC-IC	PWM step-up, 6.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E64	ej	XC6121C235MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E65	eb	XC6367E652MR	DC-DC-IC	PWM step-up, 6.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E65	ej	XC6121C236MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E66	ej	XC6121C237MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E67	ej	XC6121C238MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E68	ej	XC6121C239MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E69	ej	XC6121C240MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6A	-	XC6108C46AMR	Vdet-IC	4.6V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E6A	eb	XC6367E603MR	DC-DC-IC	PWM step-up, 6.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E6A	ej	XC6121C241MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6B	-	XC6108C46BMR	Vdet-IC	4.6V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E6B	eb	XC6367E613MR	DC-DC-IC	PWM step-up, 6.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E6B	ej	XC6121C242MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6C	-	XC6108C46CMR	Vdet-IC	4.6V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E6C	eb	XC6367E623MR	DC-DC-IC	PWM step-up, 6.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E6C	ej	XC6121C243MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6D	-	XC6108C46DMR	Vdet-IC	4.6V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E6D	eb	XC6367E633MR	DC-DC-IC	PWM step-up, 6.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E6D	ej	XC6121C244MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6E	eb	XC6367E643MR	DC-DC-IC	PWM step-up, 6.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E6E	ej	XC6121C245MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6F	eb	XC6367E653MR	DC-DC-IC	PWM step-up, 6.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
E6F	ec	XC6121C216MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6F	ej	XC6121C246MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6H	ec	XC6121C217MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6H	ej	XC6121C247MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6K	ec	XC6121C218MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6K	ej	XC6121C248MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6L	ec	XC6121C219MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6L	ej	XC6121C249MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E6M	ec	XC6121C220MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6M	ej	XC6121C250MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6N	ec	XC6121C221MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6P	ec	XC6121C222MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6R	ec	XC6121C223MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6S	ec	XC6121C224MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6T	ec	XC6121C225MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6U	ec	XC6121C226MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6V	ec	XC6121C227MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6X	ec	XC6121C228MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6Y	ec	XC6121C229MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E6Z	ec	XC6121C230MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
e7	-	BD45E372G-M	Vdet-IC	3.7V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
E7	-	BL8555-17EQ	LVR-IC	LDO, 1.7V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E7	-	BL8555-17ERA	LVR-IC	LDO, 1.7V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E7	-	BL8555-17ERB	LVR-IC	LDO, 1.7V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E7	-	LR8555-17EQ	LVR-IC	LDO, 1.7V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E7	-	LR8555-17ERA	LVR-IC	LDO, 1.7V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E7	-	LR8555-17ERB	LVR-IC	LDO, 1.7V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E7	-	R1111N171A	LVR-IC	LDO, Low noise, 1.7V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
E7	-	RT9167-22CB	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
E7	ea	BL8555-17PQ	LVR-IC	LDO, 1.7V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E7	ea	BL8555-17PRA	LVR-IC	LDO, 1.7V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E7	ea	BL8555-17PRB	LVR-IC	LDO, 1.7V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E7	ea	LR8555-17PQ	LVR-IC	LDO, 1.7V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E7	ea	LR8555-17PRA	LVR-IC	LDO, 1.7V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E7	ea	LR8555-17PRB	LVR-IC	LDO, 1.7V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E7	ea	RN5VD47AA	Vdet-IC	4.7V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E7	eu	BL8552CB5TR17	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E7	eu	BL8552CB5TR27	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E7	eu	BL8555-27PQ	LVR-IC	LDO, 2.7V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E7	eu	BL8555-27PRA	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E7	eu	BL8555-27PRB	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E7	eu	LR8555-27PQ	LVR-IC	LDO, 2.7V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E7	eu	LR8555-27PRA	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E7	eu	LR8555-27PRB	LVR-IC	LDO, 2.7V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E7	fg	BL8555-37PQ	LVR-IC	LDO, 3.7V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E7	fg	BL8555-37PRA	LVR-IC	LDO, 3.7V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E7	fg	BL8555-37PRB	LVR-IC	LDO, 3.7V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E7	fg	LR8555-37PQ	LVR-IC	LDO, 3.7V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E7	fg	LR8555-37PRA	LVR-IC	LDO, 3.7V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E7	fg	LR8555-37PRB	LVR-IC	LDO, 3.7V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E7	fh	BL8555-47PQ	LVR-IC	LDO, 4.7V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E7	fh	BL8555-47PRA	LVR-IC	LDO, 4.7V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E7	fh	BL8555-47PRB	LVR-IC	LDO, 4.7V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E7	fh	LR8555-47PQ	LVR-IC	LDO, 4.7V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E7	fh	LR8555-47PRA	LVR-IC	LDO, 4.7V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E7	fh	LR8555-47PRB	LVR-IC	LDO, 4.7V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E7	fk	BL8555-37EQ	LVR-IC	LDO, 3.7V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E7	fk	BL8555-37ERA	LVR-IC	LDO, 3.7V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E7	fk	BL8555-37ERB	LVR-IC	LDO, 3.7V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E7	fk	LR8555-37EQ	LVR-IC	LDO, 3.7V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E7	fk	LR8555-37ERA	LVR-IC	LDO, 3.7V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E7	fk	LR8555-37ERB	LVR-IC	LDO, 3.7V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E7	fm	BL8555-47EQ	LVR-IC	LDO, 4.7V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E7	fm	BL8555-47ERA	LVR-IC	LDO, 4.7V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E7	fm	BL8555-47ERB	LVR-IC	LDO, 4.7V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E7	fm	LR8555-47EQ	LVR-IC	LDO, 4.7V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E7	fm	LR8555-47ERA	LVR-IC	LDO, 4.7V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E7	fm	LR8555-47ERB	LVR-IC	LDO, 4.7V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E7	fp	BL8555-27EQ	LVR-IC	LDO, 2.7V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E7	fp	BL8555-27ERA	LVR-IC	LDO, 2.7V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E7	fp	BL8555-27ERB	LVR-IC	LDO, 2.7V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E7	fp	LR8555-27EQ	LVR-IC	LDO, 2.7V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E7	fp	LR8555-27ERA	LVR-IC	LDO, 2.7V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E7	fp	LR8555-27ERB	LVR-IC	LDO, 2.7V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E70	ej	XC6121C331MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E71	ej	XC6121C332MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E72	ej	XC6121C333MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E73	-	TC53C4702ECT	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E73	ej	XC6121C334MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E74	ej	XC6121C335MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E75	ej	XC6121C336MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E76	ej	XC6121C337MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E77	ej	XC6121C338MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E78	ej	XC6121C339MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E79	ej	XC6121C340MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7A	-	XC6108C47AMR	Vdet-IC	4.7V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E7A	ej	XC6121C341MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7B	-	XC6108C47BMR	Vdet-IC	4.7V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E7B	ej	XC6121C342MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7C	-	XC6108C47CMR	Vdet-IC	4.7V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E7C	ej	XC6121C343MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7D	-	XC6108C47DMR	Vdet-IC	4.7V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E7D	ej	XC6121C344MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7E	ej	XC6121C345MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7F	ec	XC6121C316MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7F	ej	XC6121C346MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7H	ec	XC6121C317MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7H	ej	XC6121C347MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7K	ec	XC6121C318MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7K	ej	XC6121C348MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7L	ec	XC6121C319MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7L	ej	XC6121C349MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7M	ec	XC6121C320MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7M	ej	XC6121C350MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7N	ec	XC6121C321MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7P	ec	XC6121C322MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7R	ec	XC6121C323MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7S	ec	XC6121C324MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7T	ec	XC6121C325MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7U	ec	XC6121C326MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7V	ec	XC6121C327MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7X	ec	XC6121C328MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7Y	ec	XC6121C329MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E7Z	ec	XC6121C330MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
e8	-	BD45E382G-M	Vdet-IC	3.8V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
E8	-	BL8555-18EQ	LVR-IC	LDO, 1.8V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E8	-	BL8555-18ERA	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E8	-	BL8555-18ERB	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E8	-	ELM7S86B	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-25	28	Log5	6g	Elm
E8	-	LR8555-18EQ	LVR-IC	LDO, 1.8V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E8	-	LR8555-18ERA	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E8	-	LR8555-18ERB	LVR-IC	LDO, 1.8V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E8	-	R1111N181A	LVR-IC	LDO, Low noise, 1.8V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
E8	-	RT9167-23CB	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
E8	-	TC7S86F	CMOS-Log	2-input EXCLUSIVE-OR gate	SSOP-5	28	Log5	6a	Tos
E8	-	TC7S86FU	CMOS-Log	2-input EXCLUSIVE-OR gate	SC-70-5	28	Log5	6a	Tos
E8	ea	BL8555-18PQ	LVR-IC	LDO, 1.8V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E8	ea	BL8555-18PRA	LVR-IC	LDO, 1.8V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E8	ea	BL8555-18PRB	LVR-IC	LDO, 1.8V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E8	ea	LR8555-18PQ	LVR-IC	LDO, 1.8V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E8	ea	LR8555-18PRA	LVR-IC	LDO, 1.8V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E8	ea	LR8555-18PRB	LVR-IC	LDO, 1.8V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E8	ea	RN5VD48AA	Vdet-IC	4.8V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E8	eu	BL8552CB5TR18	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E8	eu	BL8552CB5TR28	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E8	eu	BL8555-28PQ	LVR-IC	LDO, 2.8V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E8	eu	BL8555-28PRA	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E8	eu	BL8555-28PRB	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E8	eu	LR8555-28PQ	LVR-IC	LDO, 2.8V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E8	eu	LR8555-28PRA	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E8	eu	LR8555-28PRB	LVR-IC	LDO, 2.8V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E8	fg	BL8555-38PQ	LVR-IC	LDO, 3.8V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E8	fg	BL8555-38PRA	LVR-IC	LDO, 3.8V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E8	fg	BL8555-38PRB	LVR-IC	LDO, 3.8V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E8	fg	LR8555-38PQ	LVR-IC	LDO, 3.8V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E8	fg	LR8555-38PRA	LVR-IC	LDO, 3.8V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E8	fg	LR8555-38PRB	LVR-IC	LDO, 3.8V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E8	fh	BL8555-48PQ	LVR-IC	LDO, 4.8V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E8	fh	BL8555-48PRA	LVR-IC	LDO, 4.8V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E8	fh	BL8555-48PRB	LVR-IC	LDO, 4.8V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E8	fh	LR8555-48PQ	LVR-IC	LDO, 4.8V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E8	fh	LR8555-48PRA	LVR-IC	LDO, 4.8V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E8	fh	LR8555-48PRB	LVR-IC	LDO, 4.8V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E8	fk	BL8555-38EQ	LVR-IC	LDO, 3.8V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E8	fk	BL8555-38ERA	LVR-IC	LDO, 3.8V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E8	fk	BL8555-38ERB	LVR-IC	LDO, 3.8V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E8	fk	LR8555-38EQ	LVR-IC	LDO, 3.8V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E8	fk	LR8555-38ERA	LVR-IC	LDO, 3.8V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E8	fk	LR8555-38ERB	LVR-IC	LDO, 3.8V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E8	fm	BL8555-48EQ	LVR-IC	LDO, 4.8V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E8	fm	BL8555-48ERA	LVR-IC	LDO, 4.8V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E8	fm	BL8555-48ERB	LVR-IC	LDO, 4.8V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E8	fm	LR8555-48EQ	LVR-IC	LDO, 4.8V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E8	fm	LR8555-48ERA	LVR-IC	LDO, 4.8V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E8	fm	LR8555-48ERB	LVR-IC	LDO, 4.8V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E8	fp	BL8555-28EQ	LVR-IC	LDO, 2.8V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E8	fp	BL8555-28ERA	LVR-IC	LDO, 2.8V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E8	fp	BL8555-28ERB	LVR-IC	LDO, 2.8V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E8	fp	LR8555-28EQ	LVR-IC	LDO, 2.8V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E8	fp	LR8555-28ERA	LVR-IC	LDO, 2.8V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E8	fp	LR8555-28ERB	LVR-IC	LDO, 2.8V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E80	ej	XC6121C431MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E81	ej	XC6121C432MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E82	ej	XC6121C433MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E83	-	TC53C4802ECT	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
E83	ej	XC6121C434MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E84	ej	XC6121C435MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E85	ej	XC6121C436MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E86	ej	XC6121C437MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E87	ej	XC6121C438MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E88	ej	XC6121C439MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E89	ej	XC6121C440MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8A	-	XC6108C48AMR	Vdet-IC	4.8V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E8A	ej	XC6121C441MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8B	-	XC6108C48BMR	Vdet-IC	4.8V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E8B	ej	XC6121C442MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8C	-	XC6108C48CMR	Vdet-IC	4.8V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E8C	ej	XC6121C443MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8D	-	XC6108C48DMR	Vdet-IC	4.8V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E8D	ej	XC6121C444MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8E	ej	XC6121C445MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8F	ec	XC6121C416MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8F	ej	XC6121C446MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8H	ec	XC6121C417MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8H	ej	XC6121C447MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8K	ec	XC6121C418MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8K	ej	XC6121C448MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8L	ec	XC6121C419MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8L	ej	XC6121C449MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8M	ec	XC6121C420MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8M	ej	XC6121C450MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8N	ec	XC6121C421MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8P	ec	XC6121C422MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8R	ec	XC6121C423MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8S	ec	XC6121C424MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8T	ec	XC6121C425MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8U	ec	XC6121C426MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8V	ec	XC6121C427MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8X	ec	XC6121C428MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8Y	ec	XC6121C429MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E8Z	ec	XC6121C430MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
e9	-	BD45E392G-M	Vdet-IC	3.9V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
E9	-	BL8555-19EQ	LVR-IC	LDO, 1.9V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E9	-	BL8555-19ERA	LVR-IC	LDO, 1.9V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E9	-	BL8555-19ERB	LVR-IC	LDO, 1.9V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E9	-	ELM7S66B	CMOS-Log	Single-pole single-throw analog switch	SOT-25	28	Log16	6g	Elm
E9	-	LR8555-19EQ	LVR-IC	LDO, 1.9V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E9	-	LR8555-19ERA	LVR-IC	LDO, 1.9V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E9	-	LR8555-19ERB	LVR-IC	LDO, 1.9V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E9	-	R1111N191A	LVR-IC	LDO, Low noise, 1.9V±2%, 200mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
E9	-	RT9167-24CB	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
E9	ea	BL8555-19PQ	LVR-IC	LDO, 1.9V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E9	ea	BL8555-19PRA	LVR-IC	LDO, 1.9V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E9	ea	BL8555-19PRB	LVR-IC	LDO, 1.9V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E9	ea	LR8555-19PQ	LVR-IC	LDO, 1.9V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E9	ea	LR8555-19PRA	LVR-IC	LDO, 1.9V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E9	ea	LR8555-19PRB	LVR-IC	LDO, 1.9V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E9	ea	RN5VD49AA	Vdet-IC	4.9V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
E9	eu	BL8552CB5TR19	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E9	eu	BL8552CB5TR29	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23-5	28vu	VR1	6ke	Shb
E9	eu	BL8555-29PQ	LVR-IC	LDO, 2.9V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E9	eu	BL8555-29PRA	LVR-IC	LDO, 2.9V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E9	eu	BL8555-29PRB	LVR-IC	LDO, 2.9V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E9	eu	LR8555-29PQ	LVR-IC	LDO, 2.9V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E9	eu	LR8555-29PRA	LVR-IC	LDO, 2.9V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E9	eu	LR8555-29PRB	LVR-IC	LDO, 2.9V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E9	fg	BL8555-39PQ	LVR-IC	LDO, 3.9V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E9	fg	BL8555-39PRA	LVR-IC	LDO, 3.9V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E9	fg	BL8555-39PRB	LVR-IC	LDO, 3.9V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E9	fg	LR8555-39PQ	LVR-IC	LDO, 3.9V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E9	fg	LR8555-39PRA	LVR-IC	LDO, 3.9V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E9	fg	LR8555-39PRB	LVR-IC	LDO, 3.9V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E9	fh	BL8555-49PQ	LVR-IC	LDO, 4.9V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Shb
E9	fh	BL8555-49PRA	LVR-IC	LDO, 4.9V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Shb
E9	fh	BL8555-49PRB	LVR-IC	LDO, 4.9V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Shb
E9	fh	LR8555-49PQ	LVR-IC	LDO, 4.9V±2%, 250mA	SC-70-5	28ym	VR1	6kd	Lrc
E9	fh	LR8555-49PRA	LVR-IC	LDO, 4.9V±2%, 250mA	SOT-23-5	28ym	VR1	6kd	Lrc
E9	fh	LR8555-49PRB	LVR-IC	LDO, 4.9V±2%, 250mA	SOT-23-5	28c5	VR1	6kc	Lrc
E9	fk	BL8555-39EQ	LVR-IC	LDO, 3.9V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E9	fk	BL8555-39ERA	LVR-IC	LDO, 3.9V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E9	fk	BL8555-39ERB	LVR-IC	LDO, 3.9V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E9	fk	LR8555-39EQ	LVR-IC	LDO, 3.9V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E9	fk	LR8555-39ERA	LVR-IC	LDO, 3.9V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E9	fk	LR8555-39ERB	LVR-IC	LDO, 3.9V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E9	fm	BL8555-49EQ	LVR-IC	LDO, 4.9V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E9	fm	BL8555-49ERA	LVR-IC	LDO, 4.9V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E9	fm	BL8555-49ERB	LVR-IC	LDO, 4.9V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E9	fm	LR8555-49EQ	LVR-IC	LDO, 4.9V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E9	fm	LR8555-49ERA	LVR-IC	LDO, 4.9V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E9	fm	LR8555-49ERB	LVR-IC	LDO, 4.9V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E9	fp	BL8555-29EQ	LVR-IC	LDO, 2.9V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
E9	fp	BL8555-29ERA	LVR-IC	LDO, 2.9V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
E9	fp	BL8555-29ERB	LVR-IC	LDO, 2.9V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
E9	fp	LR8555-29EQ	LVR-IC	LDO, 2.9V±2%, 250mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
E9	fp	LR8555-29ERA	LVR-IC	LDO, 2.9V±2%, 250mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
E9	fp	LR8555-29ERB	LVR-IC	LDO, 2.9V±2%, 250mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
E90	ej	XC6121C531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E91	ej	XC6121C532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E92	ej	XC6121C533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E93	-	TC53C4902ECT	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
E93	ej	XC6121C534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E94	ej	XC6121C535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E95	ej	XC6121C536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E96	ej	XC6121C537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E97	ej	XC6121C538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E98	ej	XC6121C539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E99	ej	XC6121C540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9A	-	XC6108C49AMR	Vdet-IC	4.9V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E9A	ej	XC6121C541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9B	-	XC6108C49BMR	Vdet-IC	4.9V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
E9B	ej	XC6121C542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9C	-	XC6108C49CMR	Vdet-IC	4.9V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E9C	ej	XC6121C543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9D	-	XC6108C49DMR	Vdet-IC	4.9V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
E9D	ej	XC6121C544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9E	ej	XC6121C545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9F	ec	XC6121C516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9F	ej	XC6121C546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E9H	ec	XC6121C517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9H	ej	XC6121C547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9K	ec	XC6121C518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9K	ej	XC6121C548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9L	ec	XC6121C519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9L	ej	XC6121C549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9M	ec	XC6121C520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9M	ej	XC6121C550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9N	ec	XC6121C521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9P	ec	XC6121C522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9R	ec	XC6121C523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9S	ec	XC6121C524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9T	ec	XC6121C525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9U	ec	XC6121C526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9V	ec	XC6121C527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9X	ec	XC6121C528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9Y	ec	XC6121C529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
E9Z	ec	XC6121C530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
Ea	-	BD49E41G	Vdet-IC	4.1V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
EA	-	µPA504T	Si-n/p	Dual, 60V, 100mA, 300mW, 250/180MHz	SOT-23-5	28td	T12a	6a	Nec
EA	-	µPA574T	Si-n/p	Dual, 60V, 100mA, 180/250MHz	SOT-23-5	28td	T12a	6a	Nec
EA	-	BD4840FVE	Vdet-IC	4.0V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EA	-	BD4840G	Vdet-IC	4.0V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EA	-	ELM7S14B	CMOS-Log	Inverting Schmitt-trigger	SOT-25	28	Log7	6g	Elm
EA	-	RN5RT60AA	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-23-5	28vrt	VR4	6g	Ric
EA	-	RT9167-25CB	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EA	-	TC7S14F	CMOS-Log	Inverting Schmitt-trigger	SSOP-5	28	Log7	6a	Tos
EA	-	TC7S14FU	CMOS-Log	Inverting Schmitt-trigger	SC-70-5	28	Log7	6a	Tos
EA-	-	RT9167-25PB	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EA-	-	XC62GR4012M	LVR-IC	4.0V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
EA-	eh	XC62GP4012M	LVR-IC	4.0V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
EA+	-	XC62GR4022M	LVR-IC	4.0V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
EA+	eh	XC62GP4022M	LVR-IC	4.0V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
EA0	ej	XC6121C731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EA1	ej	XC6121C732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EA2	ej	XC6121C733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EA25x	-	G5130-25T11U	DC-DC-IC	PSM step-up, 2.5V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA26x	-	G5130-26T11U	DC-DC-IC	PSM step-up, 2.6V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA27x	-	G5130-27T11U	DC-DC-IC	PSM step-up, 2.7V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA28x	-	G5130-28T11U	DC-DC-IC	PSM step-up, 2.8V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA29x	-	G5130-29T11U	DC-DC-IC	PSM step-up, 2.9V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA3	ej	XC6121C734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EA30x	-	G5130-30T11U	DC-DC-IC	PSM step-up, 3.0V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA31x	-	G5130-31T11U	DC-DC-IC	PSM step-up, 3.1V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA32x	-	G5130-32T11U	DC-DC-IC	PSM step-up, 3.2V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA33x	-	G5130-33T11U	DC-DC-IC	PSM step-up, 3.3V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA34x	-	G5130-34T11U	DC-DC-IC	PSM step-up, 3.4V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA35x	-	G5130-35T11U	DC-DC-IC	PSM step-up, 3.5V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA36x	-	G5130-36T11U	DC-DC-IC	PSM step-up, 3.6V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA37x	-	G5130-37T11U	DC-DC-IC	PSM step-up, 3.7V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA38x	-	G5130-38T11U	DC-DC-IC	PSM step-up, 3.8V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA39x	-	G5130-39T11U	DC-DC-IC	PSM step-up, 3.9V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA4	ej	XC6121C735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EA40x	-	G5130-40T11U	DC-DC-IC	PSM step-up, 4.0V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA41x	-	G5130-41T11U	DC-DC-IC	PSM step-up, 4.1V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA42x	-	G5130-42T11U	DC-DC-IC	PSM step-up, 4.2V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA43x	-	G5130-43T11U	DC-DC-IC	PSM step-up, 4.3V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA44x	-	G5130-44T11U	DC-DC-IC	PSM step-up, 4.4V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA45x	-	G5130-45T11U	DC-DC-IC	PSM step-up, 4.5V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA46x	-	G5130-46T11U	DC-DC-IC	PSM step-up, 4.6V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA47x	-	G5130-47T11U	DC-DC-IC	PSM step-up, 4.7V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA48x	-	G5130-48T11U	DC-DC-IC	PSM step-up, 4.8V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA49x	-	G5130-49T11U	DC-DC-IC	PSM step-up, 4.9V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA5	ej	XC6121C736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EA50x	-	G5130-50T11U	DC-DC-IC	PSM step-up, 5.0V±2%, +CE	SOT-23-5	28sc	DC3	6g	Gmt
EA6	ej	XC6121C737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EA7	ej	XC6121C738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EA8	-	XC9237B08CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EA8	ej	XC6121C739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EA9	-	XC9237B09CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EA9	ej	XC6121C740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAA	-	RP201N321B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EAA	ej	XC6121C741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAB	-	RP201N331B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EAB	ej	XC6121C742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAC	-	RP201N341B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EAC	ej	XC6121C743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAD	-	RP201N351B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EAD	ej	XC6121C744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAE	-	RP201N361B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EAE	ec	XC6121C716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAE	ej	XC6121C745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAF	-	RP201N371B	LVR-IC	LDO, 3.7V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EAF	ej	XC6121C746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAG	-	RP201N381B	LVR-IC	LDO, 3.8V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EAH	-	RP201N391B	LVR-IC	LDO, 3.9V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EAH	ec	XC6121C717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAH	ej	XC6121C747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAJ	-	RP201N401B	LVR-IC	LDO, 4.0V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EAK	-	RP201N281B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EAK	ec	XC6121C718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAK	ej	XC6121C748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAL	-	XC9237B0LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EAL	ec	XC6121C719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAL	ej	XC6121C749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAM	-	XC9237B0MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EAM	ec	XC6121C720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAM	ej	XC6121C750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAN	ec	XC6121C721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAP	ec	XC6121C722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAR	ec	XC6121C723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAS	ec	XC6121C724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAT	ec	XC6121C725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAU	ec	XC6121C726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAV	ec	XC6121C727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAX	ec	XC6121C728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAY	ec	XC6121C729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EAZ	ec	XC6121C730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
Eb	-	BD49E42G	Vdet-IC	4.2V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
EB	-	BD4841FVE	Vdet-IC	4.1V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EB	-	BD4841G	Vdet-IC	4.1V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EB	-	RT9167-26CB	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EB-	-	RT9167-26PB	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EB-	-	XC62GR4112M	LVR-IC	4.1V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
EB-	eh	XC62GP4112M	LVR-IC	4.1V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
EB+	-	XC62GR4122M	LVR-IC	4.1V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
EB+	eh	XC62GP4122M	LVR-IC	4.1V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
EB0	-	XC9237B10CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EB0	ej	XC6121C631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EB1	-	XC9237B11CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EB1	ej	XC6121C632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EB2	-	XC9237B12CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EB2	ej	XC6121C633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EB25x	-	G5131-25T11U	DC-DC-IC	PSM step-up, 2.5V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB26x	-	G5131-26T11U	DC-DC-IC	PSM step-up, 2.6V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB27x	-	G5131-27T11U	DC-DC-IC	PSM step-up, 2.7V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB28x	-	G5131-28T11U	DC-DC-IC	PSM step-up, 2.8V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB29x	-	G5131-29T11U	DC-DC-IC	PSM step-up, 2.9V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB3	-	XC9237B13CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EB3	ej	XC6121C634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EB30x	-	G5131-30T11U	DC-DC-IC	PSM step-up, 3.0V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB31x	-	G5131-31T11U	DC-DC-IC	PSM step-up, 3.1V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB32x	-	G5131-32T11U	DC-DC-IC	PSM step-up, 3.2V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB33x	-	G5131-33T11U	DC-DC-IC	PSM step-up, 3.3V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB34x	-	G5131-34T11U	DC-DC-IC	PSM step-up, 3.4V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB35x	-	G5131-35T11U	DC-DC-IC	PSM step-up, 3.5V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB36x	-	G5131-36T11U	DC-DC-IC	PSM step-up, 3.6V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB37x	-	G5131-37T11U	DC-DC-IC	PSM step-up, 3.7V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB38x	-	G5131-38T11U	DC-DC-IC	PSM step-up, 3.8V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB39x	-	G5131-39T11U	DC-DC-IC	PSM step-up, 3.9V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EB4	-	XC9237B14CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EB4	ej	XC6121C635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EB40x	-	G5131-40T11U	DC-DC-IC	PSM step-up, 4.0V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB41x	-	G5131-41T11U	DC-DC-IC	PSM step-up, 4.1V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB42x	-	G5131-42T11U	DC-DC-IC	PSM step-up, 4.2V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB43x	-	G5131-43T11U	DC-DC-IC	PSM step-up, 4.3V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB44x	-	G5131-44T11U	DC-DC-IC	PSM step-up, 4.4V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB45x	-	G5131-45T11U	DC-DC-IC	PSM step-up, 4.5V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB46x	-	G5131-46T11U	DC-DC-IC	PSM step-up, 4.6V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB47x	-	G5131-47T11U	DC-DC-IC	PSM step-up, 4.7V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB48x	-	G5131-48T11U	DC-DC-IC	PSM step-up, 4.8V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB49x	-	G5131-49T11U	DC-DC-IC	PSM step-up, 4.9V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB5	-	XC9237B15CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EB5	eb	XC6367E151MR	DC-DC-IC	PWM step-up, 1.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EB5	ej	XC6121C636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EB50x	-	G5131-50T11U	DC-DC-IC	PSM step-up, 5.0V±2%, +CE, ext, transistor	SOT-23-5	28sd	DC6	6g	Gmt
EB6	-	XC9237B16CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EB6	eb	XC6367E161MR	DC-DC-IC	PWM step-up, 1.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EB6	ej	XC6121C637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EB7	-	XC9237B17CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EB7	eb	XC6367E171MR	DC-DC-IC	PWM step-up, 1.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EB7	ej	XC6121C638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EB8	-	XC9237B18CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EB8	eb	XC6367E181MR	DC-DC-IC	PWM step-up, 1.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EB8	ej	XC6121C639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EB9	-	XC9237B19CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EB9	eb	XC6367E191MR	DC-DC-IC	PWM step-up, 1.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EB9	ej	XC6121C640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBA	-	RP201N321D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EBA	-	XC9237B1ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EBA	ej	XC6121C641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBB	-	RP201N331D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EBB	-	XC9237B1BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EBB	ej	XC6121C642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBC	-	RP201N341D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EBC	-	XC9237B1CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EBC	ej	XC6121C643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBD	-	RP201N351D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EBD	-	XC9237B1DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EBD	ej	XC6121C644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBE	-	RP201N361D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EBE	-	XC9237B1ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EBE	ej	XC6121C645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBF	-	RP201N371D	LVR-IC	LDO, 3.7V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EBF	-	XC9237B1FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EBF	eb	XC6367E155MR	DC-DC-IC	PWM step-up, 1.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EBF	ec	XC6121C616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBF	ej	XC6121C646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBG	-	RP201N381D	LVR-IC	LDO, 3.8V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EBH	-	RP201N391D	LVR-IC	LDO, 3.9V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EBH	-	XC9237B1HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EBH	eb	XC6367E165MR	DC-DC-IC	PWM step-up, 1.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EBH	ec	XC6121C617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBH	ej	XC6121C647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBJ	-	RP201N401D	LVR-IC	LDO, 4.0V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EBK	-	RP201N281D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
EBK	-	XC9237B1KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EBK	eb	XC6367E175MR	DC-DC-IC	PWM step-up, 1.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EBK	ec	XC6121C618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBK	ej	XC6121C648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBL	-	XC9237B1LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EBL	eb	XC6367E185MR	DC-DC-IC	PWM step-up, 1.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EBL	ec	XC6121C619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBL	ej	XC6121C649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBM	-	XC9237B1MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EBM	eb	XC6367E195MR	DC-DC-IC	PWM step-up, 1.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EBM	ec	XC6121C620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBM	ej	XC6121C650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBN	ec	XC6121C621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBP	ec	XC6121C622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EBR	ec	XC6121C623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBS	ec	XC6121C624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBT	ec	XC6121C625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBU	ec	XC6121C626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBV	ec	XC6121C627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBX	ec	XC6121C628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBY	ec	XC6121C629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
EBZ	ec	XC6121C630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
Ec	-	BD49E43G	Vdet-IC	4.3V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
EC	-	BD4842FVE	Vdet-IC	4.2V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EC	-	BD4842G	Vdet-IC	4.2V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EC	-	RT9167-27CB	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EC-	-	RT9167-27PB	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EC-	-	XC62GR4212M	LVR-IC	4.2V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
EC-	eh	XC62GP4212M	LVR-IC	4.2V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
EC+	-	XC62GR4222M	LVR-IC	4.2V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
EC+	eh	XC62GP4222M	LVR-IC	4.2V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
EC0	-	XC9237B20CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EC0	eb	XC6367E201MR	DC-DC-IC	PWM step-up, 2.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EC0	ej	XC6121D431MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EC1	-	XC9237B21CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EC1	eb	XC6367E211MR	DC-DC-IC	PWM step-up, 2.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EC1	ej	XC6121D432MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EC18	-	AIC1730-18CV	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC18P	-	AIC1730-18PV	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC19	-	AIC1730-19CV	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC19P	-	AIC1730-19PV	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC2	-	XC9237B22CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EC2	eb	XC6367E221MR	DC-DC-IC	PWM step-up, 2.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EC2	ej	XC6121D433MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EC20	-	AIC1730-20CV	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC20P	-	AIC1730-20PV	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC21	-	AIC1730-21CV	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC21P	-	AIC1730-21PV	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC22	-	AIC1730-22CV	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC22P	-	AIC1730-22PV	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC23	-	AIC1730-23CV	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC23P	-	AIC1730-23PV	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC24	-	AIC1730-24CV	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC24P	-	AIC1730-24PV	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC25	-	AIC1730-25CV	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC25P	-	AIC1730-25PV	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC26	-	AIC1730-26CV	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC26P	-	AIC1730-26PV	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC27	-	AIC1730-27CV	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC27P	-	AIC1730-27PV	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC28	-	AIC1730-28CV	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC28P	-	AIC1730-28PV	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC29	-	AIC1730-29CV	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC29P	-	AIC1730-29PV	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC2J	-	AIC1730-285CV	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC2JP	-	AIC1730-285PV	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC3	-	XC9237B23CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EC3	eb	XC6367E231MR	DC-DC-IC	PWM step-up, 2.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EC3	ej	XC6121D434MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EC30	-	AIC1730-30CV	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC30P	-	AIC1730-30PV	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC31	-	AIC1730-31CV	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC31P	-	AIC1730-31PV	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC32	-	AIC1730-32CV	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC32P	-	AIC1730-32PV	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC33	-	AIC1730-33CV	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC33P	-	AIC1730-33PV	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Aic
EC4	-	XC9237B24CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EC4	eb	XC6367E241MR	DC-DC-IC	PWM step-up, 2.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EC4	ej	XC6121D435MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EC5	-	XC9237B25CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EC5	eb	XC6367E251MR	DC-DC-IC	PWM step-up, 2.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EC5	ej	XC6121D436MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EC6	-	XC9237B26CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EC6	eb	XC6367E261MR	DC-DC-IC	PWM step-up, 2.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EC6	ej	XC6121D437MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EC7	-	XC9237B27CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EC7	eb	XC6367E271MR	DC-DC-IC	PWM step-up, 2.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EC7	ej	XC6121D438MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EC8	-	XC9237B28CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EC8	eb	XC6367E281MR	DC-DC-IC	PWM step-up, 2.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EC8	ej	XC6121D439MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EC9	-	XC9237B29CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EC9	eb	XC6367E291MR	DC-DC-IC	PWM step-up, 2.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EC9	ej	XC6121D440MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECA	-	XC9237B2ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ECA	eb	XC6367E205MR	DC-DC-IC	PWM step-up, 2.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ECA	ej	XC6121D441MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECB	-	XC9237B2BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ECB	eb	XC6367E215MR	DC-DC-IC	PWM step-up, 2.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ECB	ej	XC6121D442MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECC	-	XC9237B2CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ECC	eb	XC6367E225MR	DC-DC-IC	PWM step-up, 2.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ECC	ej	XC6121D443MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECD	-	XC9237B2DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ECD	eb	XC6367E235MR	DC-DC-IC	PWM step-up, 2.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ECD	ej	XC6121D444MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECE	-	XC9237B2ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ECE	eb	XC6367E245MR	DC-DC-IC	PWM step-up, 2.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ECE	ej	XC6121D445MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECF	-	XC9237B2FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ECF	eb	XC6367E255MR	DC-DC-IC	PWM step-up, 2.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ECF	ec	XC6121D416MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECF	ej	XC6121D446MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECH	-	XC9237B2HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ECH	eb	XC6367E265MR	DC-DC-IC	PWM step-up, 2.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ECH	ec	XC6121D417MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECH	ej	XC6121D447MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECK	-	XC9237B2KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ECK	eb	XC6367E275MR	DC-DC-IC	PWM step-up, 2.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ECK	ec	XC6121D418MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECK	ej	XC6121D448MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECL	-	XC9237B2LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ECL	eb	XC6367E285MR	DC-DC-IC	PWM step-up, 2.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ECL	ec	XC6121D419MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECL	ej	XC6121D449MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECM	-	XC9237B2MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ECM	eb	XC6367E295MR	DC-DC-IC	PWM step-up, 2.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ECM	ec	XC6121D420MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECM	ej	XC6121D450MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECN	ec	XC6121D421MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECP	ec	XC6121D422MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECR	ec	XC6121D423MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECS	ec	XC6121D424MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECT	ec	XC6121D425MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECU	ec	XC6121D426MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECV	ec	XC6121D427MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECX	ec	XC6121D428MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECY	ec	XC6121D429MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ECZ	ec	XC6121D430MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
Ed	-	BD49E44G	Vdet-IC	4.4V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
ED	-	BD4843FVE	Vdet-IC	4.3V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
ED	-	BD4843G	Vdet-IC	4.3V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
ED	-	RT9167-28CB	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
ED-	-	XC62GR4312M	LVR-IC	4.3V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
ED-	eh	XC62GP4312M	LVR-IC	4.3V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
ED+	-	XC62GR4322M	LVR-IC	4.3V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
ED+	eh	XC62GP4322M	LVR-IC	4.3V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
ED0	-	XC9237B30CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ED0	eb	XC6367E301MR	DC-DC-IC	PWM step-up, 3.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ED0	ej	XC6121D731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ED1	-	XC9237B31CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ED1	eb	XC6367E311MR	DC-DC-IC	PWM step-up, 3.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ED1	ej	XC6121D732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ED13	-	AIC1731-13CV	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED13G	-	AIC1731-13CVG	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED13P	-	AIC1731-13CVP	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED15	-	AIC1731-15CV	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED15G	-	AIC1731-15CVG	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED15P	-	AIC1731-15CVP	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED18	-	AIC1731-18CV	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED18G	-	AIC1731-18CVG	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED18P	-	AIC1731-18CVP	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED2	-	XC9237B32CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ED2	eb	XC6367E321MR	DC-DC-IC	PWM step-up, 3.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ED2	ej	XC6121D733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ED25	-	AIC1731-25CV	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED25G	-	AIC1731-25CVG	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED25P	-	AIC1731-25CVP	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED28	-	AIC1731-28CV	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED28G	-	AIC1731-28CVG	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED28P	-	AIC1731-28CVP	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED3	-	XC9237B33CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ED3	eb	XC6367E331MR	DC-DC-IC	PWM step-up, 3.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ED3	ej	XC6121D734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ED30	-	AIC1731-30CV	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED30G	-	AIC1731-30CVG	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED30P	-	AIC1731-30CVP	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED33	-	AIC1731-33CV	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED33G	-	AIC1731-33CVG	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED33P	-	AIC1731-33CVP	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ED4	-	XC9237B34CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ED4	eb	XC6367E341MR	DC-DC-IC	PWM step-up, 3.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ED4	ej	XC6121D735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ED5	-	XC9237B35CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ED5	eb	XC6367E351MR	DC-DC-IC	PWM step-up, 3.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ED5	ej	XC6121D736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ED6	-	XC9237B36CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ED6	eb	XC6367E361MR	DC-DC-IC	PWM step-up, 3.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ED6	ej	XC6121D737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ED7	-	XC9237B37CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ED7	eb	XC6367E371MR	DC-DC-IC	PWM step-up, 3.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ED7	ej	XC6121D738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ED8	-	XC9237B38CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ED8	eb	XC6367E381MR	DC-DC-IC	PWM step-up, 3.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ED8	ej	XC6121D739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ED9	-	XC9237B39CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ED9	eb	XC6367E391MR	DC-DC-IC	PWM step-up, 3.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
ED9	ej	XC6121D740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDA	-	XC9237B3ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EDA	eb	XC6367E305MR	DC-DC-IC	PWM step-up, 3.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EDA	ej	XC6121D741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDB	-	XC9237B3BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EDB	eb	XC6367E315MR	DC-DC-IC	PWM step-up, 3.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EDB	ej	XC6121D742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDC	-	XC9237B3CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EDC	eb	XC6367E325MR	DC-DC-IC	PWM step-up, 3.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EDC	ej	XC6121D743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDD	-	XC9237B3DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EDD	eb	XC6367E335MR	DC-DC-IC	PWM step-up, 3.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EDD	ej	XC6121D744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDE	-	XC9237B3ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EDE	eb	XC6367E345MR	DC-DC-IC	PWM step-up, 3.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EDE	ej	XC6121D745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDF	-	XC9237B3FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EDF	eb	XC6367E355MR	DC-DC-IC	PWM step-up, 3.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EDF	ec	XC6121D716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDF	ej	XC6121D746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDH	-	XC9237B3HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EDH	eb	XC6367E365MR	DC-DC-IC	PWM step-up, 3.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EDH	ec	XC6121D717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDH	ej	XC6121D747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDK	-	XC9237B3KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EDK	eb	XC6367E375MR	DC-DC-IC	PWM step-up, 3.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EDK	ec	XC6121D718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDK	ej	XC6121D748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDL	-	XC9237B3LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EDL	eb	XC6367E385MR	DC-DC-IC	PWM step-up, 3.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EDL	ec	XC6121D719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDL	ej	XC6121D749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDM	-	XC9237B3MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EDM	eb	XC6367E395MR	DC-DC-IC	PWM step-up, 3.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EDM	ec	XC6121D720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDM	ej	XC6121D750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDN	ec	XC6121D721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDP	ec	XC6121D722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDR	ec	XC6121D723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDS	ec	XC6121D724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDT	ec	XC6121D725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDU	ec	XC6121D726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDV	ec	XC6121D727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDX	ec	XC6121D728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDY	ec	XC6121D729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EDZ	ec	XC6121D730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
Ee	-	BD49E45G	Vdet-IC	4.5V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
EE	-	BD4844FVE	Vdet-IC	4.4V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EE	-	BD4844G	Vdet-IC	4.4V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EE	-	RT9167-29CB	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EE-	-	RT9167-29PB	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EE-	-	XC62GR4412M	LVR-IC	4.4V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
EE-	eh	XC62GP4412M	LVR-IC	4.4V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
EE+	-	XC62GR4422M	LVR-IC	4.4V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
EE+	eh	XC62GP4422M	LVR-IC	4.4V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
EE0	-	XC9237B40CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EE0	eb	XC6367E401MR	DC-DC-IC	PWM step-up, 4.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EE0	ej	XC6121E431MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EE1	eb	XC6367E411MR	DC-DC-IC	PWM step-up, 4.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EE1	ej	XC6121E432MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EE13	-	AIC1733-13CV	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE13G	-	AIC1733-13CVG	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE13P	-	AIC1733-13CVP	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE15	-	AIC1733-15CV	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE15G	-	AIC1733-15CVG	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE15P	-	AIC1733-15CVP	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE18	-	AIC1733-18CV	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE18G	-	AIC1733-18CVG	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE18P	-	AIC1733-18CVP	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE2	eb	XC6367E421MR	DC-DC-IC	PWM step-up, 4.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EE2	ej	XC6121E433MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EE25	-	AIC1733-25CV	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE25G	-	AIC1733-25CVG	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE25P	-	AIC1733-25CVP	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE28	-	AIC1733-28CV	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE28G	-	AIC1733-28CVG	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE28P	-	AIC1733-28CVP	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE3	eb	XC6367E431MR	DC-DC-IC	PWM step-up, 4.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EE3	ej	XC6121E434MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EE30	-	AIC1733-30CV	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE30G	-	AIC1733-30CVG	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE30P	-	AIC1733-30CVP	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE33	-	AIC1733-33CV	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE33G	-	AIC1733-33CVG	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE33P	-	AIC1733-33CVP	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
EE4	eb	XC6367E441MR	DC-DC-IC	PWM step-up, 4.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EE4	ej	XC6121E435MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EE5	eb	XC6367E451MR	DC-DC-IC	PWM step-up, 4.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EE5	ej	XC6121E436MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EE6	eb	XC6367E461MR	DC-DC-IC	PWM step-up, 4.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EE6	ej	XC6121E437MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EE7	eb	XC6367E471MR	DC-DC-IC	PWM step-up, 4.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EE7	ej	XC6121E438MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EE8	eb	XC6367E481MR	DC-DC-IC	PWM step-up, 4.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EE8	ej	XC6121E439MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EE9	eb	XC6367E491MR	DC-DC-IC	PWM step-up, 4.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EE9	ej	XC6121E440MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEA	eb	XC6367E405MR	DC-DC-IC	PWM step-up, 4.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EEA	ej	XC6121E441MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEB	eb	XC6367E415MR	DC-DC-IC	PWM step-up, 4.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EEB	ej	XC6121E442MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEC	eb	XC6367E425MR	DC-DC-IC	PWM step-up, 4.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EEC	ej	XC6121E443MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EED	eb	XC6367E435MR	DC-DC-IC	PWM step-up, 4.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EED	ej	XC6121E444MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEE	eb	XC6367E445MR	DC-DC-IC	PWM step-up, 4.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EEE	ej	XC6121E445MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEF	eb	XC6367E455MR	DC-DC-IC	PWM step-up, 4.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EEF	ec	XC6121E416MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEF	ej	XC6121E446MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEH	eb	XC6367E465MR	DC-DC-IC	PWM step-up, 4.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EEH	ec	XC6121E417MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEH	ej	XC6121E447MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEK	eb	XC6367E475MR	DC-DC-IC	PWM step-up, 4.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EEK	ec	XC6121E418MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEK	ej	XC6121E448MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEL	eb	XC6367E485MR	DC-DC-IC	PWM step-up, 4.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EEL	ec	XC6121E419MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEL	ej	XC6121E449MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEM	eb	XC6367E495MR	DC-DC-IC	PWM step-up, 4.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EEM	ec	XC6121E420MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEM	ej	XC6121E450MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEN	ec	XC6121E421MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEP	ec	XC6121E422MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EER	ec	XC6121E423MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EES	ec	XC6121E424MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EET	ec	XC6121E425MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEU	ec	XC6121E426MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEV	ec	XC6121E427MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEX	ec	XC6121E428MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEY	ec	XC6121E429MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EEZ	ec	XC6121E430MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
Ef	-	BD49E46G	Vdet-IC	4.6V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
EF	-	BD4845FVE	Vdet-IC	4.5V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EF	-	BD4845G	Vdet-IC	4.5V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EF	-	RT9167-30CB	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EF-	-	RT9167-30PB	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EF-	-	XC62GR4512M	LVR-IC	4.5V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
EF-	eh	XC62GP4512M	LVR-IC	4.5V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
EF+	-	XC62GR4522M	LVR-IC	4.5V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
EF+	eh	XC62GP4522M	LVR-IC	4.5V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
EF0	eb	XC6367E501MR	DC-DC-IC	PWM step-up, 5.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EF0	ej	XC6121E731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EF1	eb	XC6367E511MR	DC-DC-IC	PWM step-up, 5.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EF1	ej	XC6121E732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EF2	eb	XC6367E521MR	DC-DC-IC	PWM step-up, 5.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EF2	ej	XC6121E733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EF3	eb	XC6367E531MR	DC-DC-IC	PWM step-up, 5.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EF3	ej	XC6121E734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EF4	eb	XC6367E541MR	DC-DC-IC	PWM step-up, 5.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EF4	ej	XC6121E735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EF5	eb	XC6367E551MR	DC-DC-IC	PWM step-up, 5.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EF5	ej	XC6121E736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EF6	eb	XC6367E561MR	DC-DC-IC	PWM step-up, 5.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EF6	ej	XC6121E737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EF7	eb	XC6367E571MR	DC-DC-IC	PWM step-up, 5.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EF7	ej	XC6121E738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EF8	-	XC9237B08DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EF8	eb	XC6367E581MR	DC-DC-IC	PWM step-up, 5.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EF8	ej	XC6121E739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EF9	-	XC9237B09DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EF9	eb	XC6367E591MR	DC-DC-IC	PWM step-up, 5.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EF9	ej	XC6121E740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFA	eb	XC6367E505MR	DC-DC-IC	PWM step-up, 5.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EFA	ej	XC6121E741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFB	eb	XC6367E515MR	DC-DC-IC	PWM step-up, 5.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EFB	ej	XC6121E742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFC	eb	XC6367E525MR	DC-DC-IC	PWM step-up, 5.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EFC	ej	XC6121E743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFD	eb	XC6367E535MR	DC-DC-IC	PWM step-up, 5.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EFD	ej	XC6121E744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFE	eb	XC6367E545MR	DC-DC-IC	PWM step-up, 5.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EFE	ej	XC6121E745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFF	eb	XC6367E555MR	DC-DC-IC	PWM step-up, 5.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EFF	ec	XC6121E716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFF	ej	XC6121E746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFH	eb	XC6367E565MR	DC-DC-IC	PWM step-up, 5.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EFH	ec	XC6121E717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFH	ej	XC6121E747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFK	eb	XC6367E575MR	DC-DC-IC	PWM step-up, 5.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EFK	ec	XC6121E718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFK	ej	XC6121E748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFL	-	XC9237B0LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EFL	eb	XC6367E585MR	DC-DC-IC	PWM step-up, 5.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EFL	ec	XC6121E719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFL	ej	XC6121E749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFM	-	XC9237B0MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EFM	eb	XC6367E595MR	DC-DC-IC	PWM step-up, 5.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EFM	ec	XC6121E720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFM	ej	XC6121E750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFN	ec	XC6121E721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFP	ec	XC6121E722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFR	ec	XC6121E723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFS	ec	XC6121E724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFT	ec	XC6121E725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFU	ec	XC6121E726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFV	ec	XC6121E727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFX	ec	XC6121E728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFY	ec	XC6121E729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EFZ	ec	XC6121E730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
Eg	-	BD49E47G	Vdet-IC	4.7V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
EG	-	BD4846FVE	Vdet-IC	4.6V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EG	-	BD4846G	Vdet-IC	4.6V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EG	-	RT9167-31CB	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EG-	-	RT9167-31PB	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
Eh	-	BD49E48G	Vdet-IC	4.8V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
EH	-	BD4847FVE	Vdet-IC	4.7V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EH	-	BD4847G	Vdet-IC	4.7V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EH	-	RT9167-32CB	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EH	-	TPS62228DDC	DC-DC-IC	PWM step-down, 1.875V, 400mA, 1.25MHz	SOT-23-5	28yj	-	6k	Ti
EH-	-	RT9167-32PB	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EH-	-	XC62GR4612M	LVR-IC	4.6V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
EH-	eh	XC62GP4612M	LVR-IC	4.6V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
EH+	-	XC62GR4622M	LVR-IC	4.6V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
EH+	eh	XC62GP4622M	LVR-IC	4.6V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
EH0	-	XC9237B10DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EH0	eb	XC6367E601MR	DC-DC-IC	PWM step-up, 6.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EH0	ej	XC6121D331MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EH1	-	XC9237B11DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EH1	eb	XC6367E611MR	DC-DC-IC	PWM step-up, 6.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EH1	ej	XC6121D332MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EH2	-	XC9237B12DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EH2	eb	XC6367E621MR	DC-DC-IC	PWM step-up, 6.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EH2	ej	XC6121D333MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EH3	-	XC9237B13DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EH3	eb	XC6367E631MR	DC-DC-IC	PWM step-up, 6.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EH3	ej	XC6121D334MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EH4	-	XC9237B14DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EH4	eb	XC6367E641MR	DC-DC-IC	PWM step-up, 6.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EH4	ej	XC6121D335MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EH5	-	XC9237B15DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EH5	eb	XC6367E651MR	DC-DC-IC	PWM step-up, 6.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EH5	ej	XC6121D336MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EH6	-	XC9237B16DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EH6	ej	XC6121D337MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EH7	-	XC9237B17DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EH7	ej	XC6121D338MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EH8	-	XC9237B18DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EH8	ej	XC6121D339MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EH9	-	XC9237B19DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EH9	ej	XC6121D340MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHA	-	XC9237B1ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EHA	eb	XC6367E605MR	DC-DC-IC	PWM step-up, 6.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EHA	ej	XC6121D341MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHB	-	XC9237B1BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EHB	eb	XC6367E615MR	DC-DC-IC	PWM step-up, 6.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EHB	ej	XC6121D342MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHC	-	XC9237B1CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EHC	eb	XC6367E625MR	DC-DC-IC	PWM step-up, 6.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EHC	ej	XC6121D343MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHD	-	XC9237B1DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EHD	eb	XC6367E635MR	DC-DC-IC	PWM step-up, 6.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EHD	ej	XC6121D344MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHE	-	XC9237B1EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EHE	eb	XC6367E645MR	DC-DC-IC	PWM step-up, 6.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EHE	ej	XC6121D345MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHF	-	XC9237B1FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EHF	eb	XC6367E655MR	DC-DC-IC	PWM step-up, 6.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
EHF	ec	XC6121D316MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHF	ej	XC6121D346MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHH	-	XC9237B1HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EHH	ec	XC6121D317MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHH	ej	XC6121D347MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHK	-	XC9237B1KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EHK	ec	XC6121D318MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHK	ej	XC6121D348MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHL	-	XC9237B1LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EHL	ec	XC6121D319MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHL	ej	XC6121D349MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHM	-	XC9237B1MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EHM	ec	XC6121D320MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHM	ej	XC6121D350MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHN	ec	XC6121D321MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHP	ec	XC6121D322MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHR	ec	XC6121D323MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHS	ec	XC6121D324MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHT	ec	XC6121D325MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHU	ec	XC6121D326MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHV	ec	XC6121D327MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHX	ec	XC6121D328MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHY	ec	XC6121D329MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EHZ	ec	XC6121D330MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EJ	-	BD4848FVE	Vdet-IC	4.8V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EJ	-	BD4848G	Vdet-IC	4.8V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EJ	-	RT9167-33CB	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EJ	-	TPS62229DDC	DC-DC-IC	PWM step-down, 1.7V, 400mA, 1.25MHz	SOT-23-5	28yj	-	6k	Ti
EJ-	-	RT9167-33PB	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EJ=	-	RT9167-33GB	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
Ek	-	BD49E49G	Vdet-IC	4.9V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
EK	-	BD4849FVE	Vdet-IC	4.9V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EK	-	BD4849G	Vdet-IC	4.9V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EK	-	RT9167-34CB	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EK-	-	XC62GR4712M	LVR-IC	4.7V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
EK-	eh	XC62GP4712M	LVR-IC	4.7V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
EK+	-	XC62GR4722M	LVR-IC	4.7V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
EK+	eh	XC62GP4722M	LVR-IC	4.7V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
EK0	-	XC9237B20DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EK0	ej	XC6121F731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EK1	-	XC9237B21DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EK1	ej	XC6121F732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EK2	-	XC9237B22DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EK2	ej	XC6121F733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EK3	-	XC9237B23DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EK3	ej	XC6121F734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EK4	-	XC9237B24DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EK4	ej	XC6121F735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EK5	-	XC9237B25DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EK5	ej	XC6121F736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EK6	-	XC9237B26DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EK6	ej	XC6121F737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EK7	-	XC9237B27DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EK7	ej	XC6121F738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EK8	-	XC9237B28DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EK8	ej	XC6121F739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EK9	-	XC9237B29DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EK9	ej	XC6121F740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKA	-	XC9237B2ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EKA	ej	XC6121F741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKB	-	XC9237B2BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EKB	ej	XC6121F742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKC	-	XC9237B2CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EKC	ej	XC6121F743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKD	-	XC9237B2DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EKD	ej	XC6121F744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKE	-	XC9237B2EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EKE	ej	XC6121F745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKF	-	XC9237B2FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EKF	ec	XC6121F716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKF	ej	XC6121F746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKH	-	XC9237B2HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EKH	ec	XC6121F717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKH	ej	XC6121F747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKK	-	XC9237B2KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EKK	ec	XC6121F718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKK	ej	XC6121F748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKL	-	XC9237B2LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EKL	ec	XC6121F719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKL	ej	XC6121F749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKM	-	XC9237B2MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EKM	ec	XC6121F720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKM	ej	XC6121F750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKN	ec	XC6121F721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKP	ec	XC6121F722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKR	ec	XC6121F723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKS	ec	XC6121F724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKT	ec	XC6121F725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKU	ec	XC6121F726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKV	ec	XC6121F727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKX	ec	XC6121F728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKY	ec	XC6121F729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EKZ	ec	XC6121F730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
eL	-	NX3V1G384GW	CMOS-Log	Single-pole single-throw analog switch	SOT-353-1	28	Log86	6a	Nxp
EL	-	BD4850FVE	Vdet-IC	5.0V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EL	-	BD4850G	Vdet-IC	5.0V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EL	-	RT9167-35CB	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EL-	-	RT9167-35PB	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EL-	-	XC62GR4812M	LVR-IC	4.8V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
EL-	eh	XC62GP4812M	LVR-IC	4.8V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
EL+	-	XC62GR4822M	LVR-IC	4.8V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
EL+	eh	XC62GP4822M	LVR-IC	4.8V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
EL0	-	XC9237B30DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EL0	ej	XC6121D531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EL1	-	XC9237B31DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EL1	ej	XC6121D532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EL2	-	XC9237B32DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EL2	ej	XC6121D533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EL3	-	XC9237B33DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EL3	ej	XC6121D534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EL4	-	XC9237B34DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EL4	ej	XC6121D535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EL5	-	XC9237B35DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EL5	ej	XC6121D536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EL6	-	XC9237B36DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EL6	ej	XC6121D537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EL7	-	XC9237B37DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EL7	ej	XC6121D538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EL8	-	XC9237B38DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EL8	ej	XC6121D539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EL9	-	XC9237B39DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EL9	ej	XC6121D540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELA	-	XC9237B3ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ELA	ej	XC6121D541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELB	-	XC9237B3BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ELB	ej	XC6121D542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELC	-	XC9237B3CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ELC	ej	XC6121D543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELD	-	XC9237B3DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ELD	ej	XC6121D544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELE	-	XC9237B3EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ELE	ej	XC6121D545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELF	-	XC9237B3FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ELF	ec	XC6121D516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELF	ej	XC6121D546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELH	-	XC9237B3HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ELH	ec	XC6121D517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELH	ej	XC6121D547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELK	-	XC9237B3KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ELK	ec	XC6121D518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELK	ej	XC6121D548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELL	-	XC9237B3LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ELL	ec	XC6121D519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELL	ej	XC6121D549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELM	-	XC9237B3MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ELM	ec	XC6121D520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELM	ej	XC6121D550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELN	ec	XC6121D521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELP	ec	XC6121D522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELR	ec	XC6121D523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELS	ec	XC6121D524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELT	ec	XC6121D525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELU	ec	XC6121D526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELV	ec	XC6121D527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELX	ec	XC6121D528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELY	ec	XC6121D529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
ELZ	ec	XC6121D530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
Em	-	BD49E50G	Vdet-IC	5.0V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
EM	-	BD4851FVE	Vdet-IC	5.1V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EM	-	BD4851G	Vdet-IC	5.1V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EM	-	RT9167-36CB	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EM-	-	RT9167-36PB	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EM-	-	XC62GR4912M	LVR-IC	4.9V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
EM-	eh	XC62GP4912M	LVR-IC	4.9V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
EM+	-	XC62GR4922M	LVR-IC	4.9V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
EM+	eh	XC62GP4922M	LVR-IC	4.9V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
EM0	-	XC9237B40DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EM0	ej	XC6121D631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EM1	ej	XC6121D632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EM2	ej	XC6121D633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EM3	ej	XC6121D634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EM4	ej	XC6121D635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EM5	ej	XC6121D636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EM6	ej	XC6121D637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EM7	ej	XC6121D638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EM8	ej	XC6121D639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EM9	ej	XC6121D640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMA	ej	XC6121D641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMB	ej	XC6121D642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMC	ej	XC6121D643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMD	ej	XC6121D644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EME	ej	XC6121D645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMF	ec	XC6121D616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMF	ej	XC6121D646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMH	ec	XC6121D617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMH	ej	XC6121D647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMK	ec	XC6121D618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMK	ej	XC6121D648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EML	ec	XC6121D619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EML	ej	XC6121D649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMM	ec	XC6121D620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMM	ej	XC6121D650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMN	ec	XC6121D621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMP	ec	XC6121D622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMR	ec	XC6121D623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMS	ec	XC6121D624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMT	ec	XC6121D625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMU	ec	XC6121D626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMV	ec	XC6121D627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMX	ec	XC6121D628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMY	ec	XC6121D629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
EMZ	ec	XC6121D630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
En	-	BD49E51G	Vdet-IC	5.1V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
EN	-	BD4852FVE	Vdet-IC	5.2V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EN	-	BD4852G	Vdet-IC	5.2V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EN	-	RT9167-37CB	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EN8	-	XC9237G08CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EN9	-	XC9237G09CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ENL	-	XC9237G0LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ENM	-	XC9237G0MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
Ep	-	BD49E52G	Vdet-IC	5.2V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
EP	-	BD4853FVE	Vdet-IC	5.3V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EP	-	BD4853G	Vdet-IC	5.3V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EP	-	RT9167-38CB	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EP0	-	XC9237G10CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EP1	-	XC9237G11CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EP2	-	XC9237G12CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EP3	-	XC9237G13CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EP4	-	XC9237G14CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EP5	-	XC9237G15CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EP6	-	XC9237G16CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EP7	-	XC9237G17CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EP8	-	XC9237G18CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EP9	-	XC9237G19CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EPA	-	XC9237G1ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EPB	-	XC9237G1BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EPC	-	XC9237G1CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EPD	-	XC9237G1DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EPE	-	XC9237G1ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EPF	-	XC9237G1FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EPH	-	XC9237G1HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EPK	-	XC9237G1KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EPL	-	XC9237G1LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EPM	-	XC9237G1MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EQ	-	BD4854FVE	Vdet-IC	5.4V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EQ	-	BD4854G	Vdet-IC	5.4V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EQ	-	RT9167-39CB	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
Er	-	BD49E53G	Vdet-IC	5.3V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
ER	-	AT1201-27XR	LVR-IC	LDO, LN, +CE, 2.7V±2%, 150mA	SOT-23-5	28un	VR7	6a	Atr
ER	-	BD4855FVE	Vdet-IC	5.5V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
ER	-	BD4855G	Vdet-IC	5.5V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
ER	-	R1112N151A	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
ER	-	RT9167-40CB	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
ER-	-	RT9167-40PB	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
ER0	-	XC9237G20CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ER0	ej	XC6121E531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ER1	-	XC9237G21CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ER1	ej	XC6121E532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ER15	-	AIC1742-15ACV	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER15P	-	AIC1742-15APV	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER18	-	AIC1742-18ACV	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER18P	-	AIC1742-18APV	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER2	-	XC9237G22CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ER2	ej	XC6121E533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ER20	-	AIC1742-20ACV	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER20P	-	AIC1742-20APV	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER25	-	AIC1742-25ACV	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER25P	-	AIC1742-25APV	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ER28	-	AIC1742-28ACV	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER28P	-	AIC1742-28APV	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER29	-	AIC1742-29ACV	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER29P	-	AIC1742-29APV	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER2J	-	AIC1742-285ACV	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER2JP	-	AIC1742-285APV	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER3	-	XC9237G23CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ER3	ej	XC6121E534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ER30	-	AIC1742-30ACV	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER30P	-	AIC1742-30APV	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER33	-	AIC1742-33ACV	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER33P	-	AIC1742-33APV	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
ER4	-	XC9237G24CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ER4	ej	XC6121E535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ER5	-	XC9237G25CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ER5	ej	XC6121E536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ER6	-	XC9237G26CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ER6	ej	XC6121E537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ER7	-	XC9237G27CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ER7	ej	XC6121E538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ER8	-	XC9237G28CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ER8	ej	XC6121E539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ER9	-	XC9237G29CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ER9	ej	XC6121E540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERA	-	XC9237G2ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ERA	ej	XC6121E541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERB	-	XC9237G2BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ERB	ej	XC6121E542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERC	-	XC9237G2CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ERC	ej	XC6121E543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERD	-	XC9237G2DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ERD	ej	XC6121E544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERE	-	XC9237G2ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ERE	ej	XC6121E545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERF	-	XC9237G2FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ERF	ec	XC6121E516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERF	ej	XC6121E546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERH	-	XC9237G2HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ERH	ec	XC6121E517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERH	ej	XC6121E547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERK	-	XC9237G2KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ERK	ec	XC6121E518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERK	ej	XC6121E548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERL	-	XC9237G2LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ERL	ec	XC6121E519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERL	ej	XC6121E549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERM	-	XC9237G2MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ERM	ec	XC6121E520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERM	ej	XC6121E550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERN	ec	XC6121E521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERP	ec	XC6121E522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERR	ec	XC6121E523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERS	ec	XC6121E524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERT	ec	XC6121E525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERU	ec	XC6121E526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERV	ec	XC6121E527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERX	ec	XC6121E528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERY	ec	XC6121E529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ERZ	ec	XC6121E530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ES	-	BD4856FVE	Vdet-IC	5.6V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
ES	-	BD4856G	Vdet-IC	5.6V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
ES	-	R1112N161A	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
ES	-	RT9167-41CB	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
ES-	-	RT9167-41PB	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
ES0	-	XC9237G30CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ES0	ej	XC6121E631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ES1	-	XC9237G31CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ES1	ej	XC6121E632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ES15	-	AIC1742-15BCV	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES15P	-	AIC1742-15BPV	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ES18	-	AIC1742-18BCV	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES18P	-	AIC1742-18BPV	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES2	-	XC9237G32CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ES2	ej	XC6121E633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ES20	-	AIC1742-20BCV	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES20P	-	AIC1742-20BPV	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES25	-	AIC1742-25BCV	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES25P	-	AIC1742-25BPV	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES28	-	AIC1742-28BCV	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES28P	-	AIC1742-28BPV	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES29	-	AIC1742-29BCV	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES29P	-	AIC1742-29BPV	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES2J	-	AIC1742-285BCV	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES2JP	-	AIC1742-285BPV	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES3	-	XC9237G33CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ES3	ej	XC6121E634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ES30	-	AIC1742-30BCV	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES30P	-	AIC1742-30BPV	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES33	-	AIC1742-33BCV	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES33P	-	AIC1742-33BPV	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28vr1	VR7	6a	Aic
ES4	-	XC9237G34CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ES4	ej	XC6121E635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ES5	-	XC9237G35CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ES5	ej	XC6121E636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ES6	-	XC9237G36CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ES6	ej	XC6121E637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ES7	-	XC9237G37CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ES7	ej	XC6121E638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ES8	-	XC9237G38CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ES8	ej	XC6121E639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ES9	-	XC9237G39CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ES9	ej	XC6121E640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESA	-	XC9237G3ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ESA	ej	XC6121E641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESB	-	XC9237G3BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ESB	ej	XC6121E642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESC	-	XC9237G3CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ESC	ej	XC6121E643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESD	-	XC9237G3DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ESD	ej	XC6121E644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESE	-	XC9237G3ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ESE	ej	XC6121E645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESF	-	XC9237G3FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ESF	ec	XC6121E616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESF	ej	XC6121E646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESH	-	XC9237G3HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ESH	ec	XC6121E617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESH	ej	XC6121E647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESK	-	XC9237G3KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ESK	ec	XC6121E618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESK	ej	XC6121E648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESL	-	XC9237G3LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ESL	ec	XC6121E619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESL	ej	XC6121E649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESM	-	XC9237G3MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ESM	ec	XC6121E620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESM	ej	XC6121E650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESN	ec	XC6121E621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESP	ec	XC6121E622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESR	ec	XC6121E623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESS	ec	XC6121E624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
EST	ec	XC6121E625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESU	ec	XC6121E626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESV	ec	XC6121E627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESX	ec	XC6121E628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESY	ec	XC6121E629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ESZ	ec	XC6121E630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
ET	-	BD4857FVE	Vdet-IC	5.7V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
ET	-	BD4857G	Vdet-IC	5.7V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
ET	-	R1112N171A	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ET	-	RT9167-42CB	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
ET-	-	RT9167-42PB	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
ET0	-	XC9237G40CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
ET0	ej	XC6121F531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ET1	ej	XC6121F532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ET2	ej	XC6121F533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ET3	ej	XC6121F534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ET4	ej	XC6121F535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ET5	ej	XC6121F536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ET6	ej	XC6121F537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ET7	ej	XC6121F538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ET8	-	XC6215B092MR	LVR-IC	LDO, 0.9V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ET8	ej	XC6121F539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ET9	-	XC6215B102MR	LVR-IC	LDO, 1.0V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ET9	ej	XC6121F540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETA	-	XC6215B112MR	LVR-IC	LDO, 1.1V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETA	ej	XC6121F541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETB	-	XC6215B122MR	LVR-IC	LDO, 1.2V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETB	ej	XC6121F542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETC	-	XC6215B132MR	LVR-IC	LDO, 1.3V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETC	ej	XC6121F543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETD	-	XC6215B142MR	LVR-IC	LDO, 1.4V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETD	ej	XC6121F544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETE	-	XC6215B152MR	LVR-IC	LDO, 1.5V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETE	ej	XC6121F545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETF	-	XC6215B162MR	LVR-IC	LDO, 1.6V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETF	ec	XC6121F516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETF	ej	XC6121F546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETH	-	XC6215B172MR	LVR-IC	LDO, 1.7V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETH	ec	XC6121F517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETH	ej	XC6121F547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETJ	ej	XC6121F548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETK	-	XC6215B182MR	LVR-IC	LDO, 1.8V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETK	ec	XC6121F518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETL	-	XC6215B192MR	LVR-IC	LDO, 1.9V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETL	ec	XC6121F519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETL	ej	XC6121F549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETM	-	XC6215B202MR	LVR-IC	LDO, 2.0V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETM	ec	XC6121F520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETM	ej	XC6121F550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETN	-	XC6215B212MR	LVR-IC	LDO, 2.1V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETN	ec	XC6121F521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETP	-	XC6215B222MR	LVR-IC	LDO, 2.2V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETP	ec	XC6121F522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETR	-	XC6215B232MR	LVR-IC	LDO, 2.3V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETR	ec	XC6121F523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETS	-	XC6215B242MR	LVR-IC	LDO, 2.4V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETS	ec	XC6121F524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETT	-	XC6215B252MR	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETT	ec	XC6121F525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETU	-	XC6215B262MR	LVR-IC	LDO, 2.6V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETU	ec	XC6121F526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETV	-	XC6215B272MR	LVR-IC	LDO, 2.7V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETV	ec	XC6121F527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETX	-	XC6215B282MR	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETX	ec	XC6121F528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETY	-	XC6215B292MR	LVR-IC	LDO, 2.9V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETY	ec	XC6121F529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
ETZ	-	XC6215B302MR	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
ETZ	ec	XC6121F530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EU	-	AP1621BW	DC-DC-IC	PWM/VFM step-down, (2.2..8V)	SOT-23-5L	28ul	-	6a	Ana
EU	-	BD4858FVE	Vdet-IC	5.8V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EU	-	BD4858G	Vdet-IC	5.8V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EU	-	R1112N181A	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
EU	-	RT9167-43CB	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EU0	-	XC6215B312MR	LVR-IC	LDO, 3.1V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EU0	ej	XC6121F631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EU1	-	XC6215B322MR	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EU1	ej	XC6121F632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EU2	-	XC6215B332MR	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EU2	ej	XC6121F633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EU3	-	XC6215B342MR	LVR-IC	LDO, 3.4V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EU3	ej	XC6121F634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EU4	-	XC6215B352MR	LVR-IC	LDO, 3.5V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EU4	ej	XC6121F635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EU5	-	XC6215B362MR	LVR-IC	LDO, 3.6V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EU5	ej	XC6121F636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EU6	-	XC6215B372MR	LVR-IC	LDO, 3.7V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EU6	ej	XC6121F637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EU7	-	XC6215B382MR	LVR-IC	LDO, 3.8V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EU7	ej	XC6121F638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EU8	-	XC6215B392MR	LVR-IC	LDO, 3.9V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EU8	-	XC9237G08DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EU8	ej	XC6121F639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EU9	-	XC6215B402MR	LVR-IC	LDO, 4.0V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EU9	-	XC9237G09DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EU9	ej	XC6121F640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUA	-	XC6215B412MR	LVR-IC	LDO, 4.1V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EUA	ej	XC6121F641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUB	-	XC6215B422MR	LVR-IC	LDO, 4.2V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EUB	ej	XC6121F642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUC	-	XC6215B432MR	LVR-IC	LDO, 4.3V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EUC	ej	XC6121F643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUD	-	XC6215B442MR	LVR-IC	LDO, 4.4V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EUD	ej	XC6121F644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUE	-	XC6215B452MR	LVR-IC	LDO, 4.5V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EUE	ej	XC6121F645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUF	-	XC6215B462MR	LVR-IC	LDO, 4.6V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EUF	ec	XC6121F616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUF	ej	XC6121F646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUH	-	XC6215B472MR	LVR-IC	LDO, 4.7V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EUH	ec	XC6121F617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUH	ej	XC6121F647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUK	-	XC6215B482MR	LVR-IC	LDO, 4.8V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EUK	ec	XC6121F618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUK	ej	XC6121F648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUL	-	XC6215B492MR	LVR-IC	LDO, 4.9V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EUL	-	XC9237G0LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EUL	ec	XC6121F619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUL	ej	XC6121F649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUM	-	XC6215B502MR	LVR-IC	LDO, 5.0V±2%, 200mA, +CE	SOT-25	28cx	VR4	6g	Tor
EUM	-	XC9237G0MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EUM	ec	XC6121F620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUM	ej	XC6121F650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUN	ec	XC6121F621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUP	ec	XC6121F622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUR	ec	XC6121F623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUS	ec	XC6121F624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUT	ec	XC6121F625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUU	ec	XC6121F626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUV	ec	XC6121F627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUX	ec	XC6121F628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUY	ec	XC6121F629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EUZ	ec	XC6121F630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
EV	-	1SV241	PIN-diode	Dual, VHF/UHF, 50V, 50mA, <0.23pF, 5Ω(100MHz)	SOT-23-5	28ds	-	6a	San
EV	-	BD4859FVE	Vdet-IC	5.9V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EV	-	BD4859G	Vdet-IC	5.9V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EV	-	R1112N191A	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
EV0	-	XC9237G10DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EV1	-	XC9237G11DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EV2	-	XC9237G12DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EV3	-	XC9237G13DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EV4	-	XC9237G14DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EV5	-	XC9237G15DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EV6	-	XC9237G16DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EV7	-	XC9237G17DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EV8	-	XC9237G18DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EV9	-	XC9237G19DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EVA	-	XC9237G1ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EVB	-	XC9237G1BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EVC	-	XC9237G1CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EVD	-	XC9237G1DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EVE	-	XC9237G1EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EVF	-	XC9237G1FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EVH	-	XC9237G1HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EVK	-	XC9237G1KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EVL	-	XC9237G1LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EVM	-	XC9237G1MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EW	-	AAT3511IGV-2.63-C-C	Vdet-IC	2.63V±1.5%, -MR, -Reset PPO	SOT-23-5	28cp	VD17	6k	Ant
EW	-	AP1625W	DC-DC-IC	PWM/VFM step-down, (2.2..8V)	SOT-23-5L	28uq	-	6a	Ana
EW	-	BD4860FVE	Vdet-IC	6.0V±1%, -Reset ODO	VSOF-5	30vdv	VD6	6e	Rhm
EW	-	BD4860G	Vdet-IC	6.0V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
EW	-	RT9167-45CB	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EW-	-	RT9167-45PB	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EX	-	AAT3515IGV-2.63-B-C	Vdet-IC	2.63V±1.5%, -MR, ±Reset PPO, 20ms	SOT-23-5	28xf	VD21	6k	Ant
EX	-	AP1621AW	DC-DC-IC	PWM/VFM step-down, (2.2..8V)	SOT-23-5L	28uk	-	6a	Ana
EX	-	AT1201-27X	LVR-IC	LDO, LN, +CE, 2.7V±2%, 150mA	SOT-23-5	28vrx	VR7	6a	Atr
EX	-	RT9167-46CB	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EX0	-	XC9237G20DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EX1	-	XC9237G21DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EX2	-	XC9237G22DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EX3	-	XC9237G23DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EX4	-	XC9237G24DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EX5	-	XC9237G25DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EX6	-	XC9237G26DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EX7	-	XC9237G27DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EX8	-	XC9237G28DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EX9	-	XC9237G29DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EXA	-	XC9237G2ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EXB	-	XC9237G2BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EXC	-	XC9237G2CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EXD	-	XC9237G2DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EXE	-	XC9237G2EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EXF	-	XC9237G2FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EXH	-	XC9237G2HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EXK	-	XC9237G2KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EXL	-	XC9237G2LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EXM	-	XC9237G2MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
Ey	-	BD49E54G	Vdet-IC	5.4V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
EY	-	RT9167-47CB	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EY-	-	RT9167-47PB	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EY0	-	XC9237G30DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EY1	-	XC9237G31DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EY2	-	XC9237G32DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EY3	-	XC9237G33DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EY4	-	XC9237G34DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EY5	-	XC9237G35DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EY6	-	XC9237G36DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EY7	-	XC9237G37DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EY8	-	XC9237G38DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EY9	-	XC9237G39DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EYA	-	XC9237G3ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EYB	-	XC9237G3BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EYC	-	XC9237G3CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EYD	-	XC9237G3DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EYE	-	XC9237G3EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EYF	-	XC9237G3FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EYH	-	XC9237G3HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EYK	-	XC9237G3KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EYL	-	XC9237G3LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EYM	-	XC9237G3MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
EZ	-	RT9167-48CB	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
EZ0	-	XC9237G40DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	SOT-25	28dc4	DC1	6g	Tor
F0	-	BU10TD3WG	LVR-IC	LDO, 1.0V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
F0	-	ELM89202B	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
F0	-	R1111N201B	LVR-IC	LDO, Low noise, 2.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0	-	Si91844DT-26	LVR-IC	LDO, LN, 2.6V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
F0	ea	RN5VD50AA	Vdet-IC	5V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
F0	eu	BL8555-20RQ	LVR-IC	LDO, 2.0V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F0	eu	BL8555-20RRA	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F0	eu	BL8555-20RRB	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F0	eu	LR8555-20RQ	LVR-IC	LDO, 2.0V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F0	eu	LR8555-20RRA	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F0	eu	LR8555-20RRB	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F0	fg	BL8555-30RQ	LVR-IC	LDO, 3.0V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F0	fg	BL8555-30RRA	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F0	fg	BL8555-30RRB	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F0	fg	LR8555-30RQ	LVR-IC	LDO, 3.0V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F0	fg	LR8555-30RRA	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F0	fg	LR8555-30RRB	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F0	fh	BL8555-40RQ	LVR-IC	LDO, 4.0V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F0	fh	BL8555-40RRA	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F0	fh	BL8555-40RRB	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F0	fh	LR8555-40RQ	LVR-IC	LDO, 4.0V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F0	fh	LR8555-40RRA	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F0	fh	LR8555-40RRB	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F0	fi	BL8555-50RQ	LVR-IC	LDO, 5.0V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F0	fi	BL8555-50RRA	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F0	fi	BL8555-50RRB	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F0	fi	LR8555-50RQ	LVR-IC	LDO, 5.0V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F0	fi	LR8555-50RRA	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F0	fi	LR8555-50RRB	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F0	fk	BL8555-30FQ	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F0	fk	BL8555-30FRA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F0	fk	BL8555-30FRB	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F0	fk	LR8555-30FQ	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F0	fk	LR8555-30FRA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F0	fk	LR8555-30FRB	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F0	fm	BL8555-40FQ	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F0	fm	BL8555-40FRA	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F0	fm	BL8555-40FRB	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F0	fm	LR8555-40FQ	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F0	fm	LR8555-40FRA	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F0	fm	LR8555-40FRB	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F0	fn	BL8555-50FQ	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F0	fn	BL8555-50FRA	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F0	fn	BL8555-50FRB	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F0	fn	LR8555-50FQ	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F0	fn	LR8555-50FRA	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F0	fn	LR8555-50FRB	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F0	fp	BL8555-20FQ	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F0	fp	BL8555-20FRA	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F0	fp	BL8555-20FRB	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F0	fp	LR8555-20FQ	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F0	fp	LR8555-20FRA	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F0	fp	LR8555-20FRB	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F00	-	74AUC1G00GV	CMOS-Log	2-input NAND gate	SOT753	28	Log1	6a	Nxp
F001	-	RP105Q062D	LVR-IC	LDO, 0.6V±15mV, 400mA, +CE, CL	SC-88A	28zf	VR11	6ma	Ric
F002	-	RP105Q072D	LVR-IC	LDO, 0.7V±15mV, 400mA, +CE, CL	SC-88A	28zf	VR11	6ma	Ric
F003	-	RP105Q082D	LVR-IC	LDO, 0.8V±15mV, 400mA, +CE, CL	SC-88A	28zf	VR11	6ma	Ric
F004	-	RP105Q092D	LVR-IC	LDO, 0.9V±15mV, 400mA, +CE, CL	SC-88A	28zf	VR11	6ma	Ric
F005	-	RP105Q102D	LVR-IC	LDO, 1.0V±15mV, 400mA, +CE, CL	SC-88A	28zf	VR11	6ma	Ric
F006	-	RP105Q122D	LVR-IC	LDO, 1.2V±15mV, 400mA, +CE, CL	SC-88A	28zf	VR11	6ma	Ric
F007	-	RP105Q132D	LVR-IC	LDO, 1.3V±15mV, 400mA, +CE, CL	SC-88A	28zf	VR11	6ma	Ric
F008	-	RP105Q142D	LVR-IC	LDO, 1.4V±15mV, 400mA, +CE, CL	SC-88A	28zf	VR11	6ma	Ric
F009	-	RP105Q152D	LVR-IC	LDO, 1.5V±15mV, 400mA, +CE, CL	SC-88A	28zf	VR11	6ma	Ric
F01	-	RP173N121D5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F010	-	RP105Q112D	LVR-IC	LDO, 1.1V±15mV, 400mA, +CE, CL	SC-88A	28zf	VR11	6ma	Ric
f02	-	XC7SH02GV	CMOS-Log	2-input NOR gate	SOT753	28	Log2	6a	Nxp
F02	-	74AUC1G02GV	CMOS-Log	2-input NOR gate	SOT753	28	Log2	6a	Nxp
F02	-	RP173N181D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F03	-	RP173N281D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F03	-	TC53C5002ECT	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
f04	-	XC7SH04GV	CMOS-Log	Inverter	SOT753	28	Log6	6a	Nxp
F04	-	74AUC1G04GV	CMOS-Log	Inverter	SOT753	28	Log6	6a	Nxp
F05	-	SMF05	TVS	Quad, Vrwm=5.0V, Vbr=6.0V, Ipp=12A, 200W(1ms)	SC-70-5L	28	D16	6a	Smt
f08	-	XC7SH08GV	CMOS-Log	2-input AND gate	SOT753	28	Log3	6a	Nxp
F08	-	74AUC1G08GV	CMOS-Log	2-input AND gate	SOT753	28	Log3	6a	Nxp
F09	ed	XC9216A096M	DC-DC-IC	PWM/PFM st-dwn, 0.9V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F0A	-	R1118N081B	LVR-IC	0.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F0A	-	XC6108C50AMR	Vdet-IC	5.0V±2%, Hysteresis, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
F0B	-	R1118N091B	LVR-IC	0.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0B	-	XC6108C50BMR	Vdet-IC	5.0V±2%, -Reset PPO	SOT-25	28rm	VD15	6g	Tor
F0C	-	R1118N101B	LVR-IC	1.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0C	-	XC6108C50CMR	Vdet-IC	5.0V±2%, Hysteresis, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
F0D	-	R1118N111B	LVR-IC	1.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0D	-	XC6108C50DMR	Vdet-IC	5.0V±2%, -Reset PPO	SOT-25	28rk	VD15	6g	Tor
F0E	-	R1118N121B	LVR-IC	1.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0F	-	R1118N121B5	LVR-IC	1.25V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0G	-	R1118N131B	LVR-IC	1.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0H	-	R1118N141B	LVR-IC	1.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0J	-	R1118N151B	LVR-IC	1.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0K	-	R1118N161B	LVR-IC	1.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0L	-	R1118N171B	LVR-IC	1.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0M	-	R1118N181B	LVR-IC	1.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0M	ed	XC9216A09CM	DC-DC-IC	PWM/PFM st-dwn, 0.9V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F0N	-	R1118N181B5	LVR-IC	1.85V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0P	-	R1118N191B	LVR-IC	1.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0Q	-	R1118N201B	LVR-IC	2.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0R	-	R1118N211B	LVR-IC	2.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0S	-	R1118N221B	LVR-IC	2.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0T	-	R1118N231B	LVR-IC	2.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0U	-	R1118N241B	LVR-IC	2.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0V	-	R1118N251B	LVR-IC	2.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0W	-	R1118N261B	LVR-IC	2.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0X	-	R1118N271B	LVR-IC	2.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0Y	-	R1118N281B	LVR-IC	2.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F0Z	-	R1118N281B5	LVR-IC	2.85V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
f1	-	BD45E402G-M	Vdet-IC	4.0V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
F1	-	BU12TD3WG	LVR-IC	LDO, 1.2V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
F1	-	ELM7SH00MB	CMOS-Log	2-input NAND gate	SOT-25	28	Log1	6g	Elm
F1	-	ELM7SH00TB	CMOS-Log	2-input NAND gate	SC-88A	28	Log1	6g	Elm
F1	-	ELM89212B	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
F1	-	HD74HCT1G00CM	CMOS-Log	2-input NAND gate	CMPAK-5	28	Log1	6a	Ren
F1	-	R1111N211B	LVR-IC	LDO, Low noise, 2.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F1	ea	RN5VD51AA	Vdet-IC	5.1V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
F1	eu	BL8555-21RQ	LVR-IC	LDO, 2.1V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F1	eu	BL8555-21RRA	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F1	eu	BL8555-21RRB	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F1	eu	LR8555-21RQ	LVR-IC	LDO, 2.1V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F1	eu	LR8555-21RRA	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F1	eu	LR8555-21RRB	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F1	fg	BL8555-31RQ	LVR-IC	LDO, 3.1V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F1	fg	BL8555-31RRA	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F1	fg	BL8555-31RRB	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F1	fg	LR8555-31RQ	LVR-IC	LDO, 3.1V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F1	fg	LR8555-31RRA	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F1	fg	LR8555-31RRB	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F1	fh	BL8555-41RQ	LVR-IC	LDO, 4.1V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F1	fh	BL8555-41RRA	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F1	fh	BL8555-41RRB	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F1	fh	LR8555-41RQ	LVR-IC	LDO, 4.1V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F1	fh	LR8555-41RRA	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F1	fh	LR8555-41RRB	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F1	fk	BL8555-31FQ	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F1	fk	BL8555-31FRA	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F1	fk	BL8555-31FRB	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F1	fk	LR8555-31FQ	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F1	fk	LR8555-31FRA	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F1	fk	LR8555-31FRB	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F1	fm	BL8555-41FQ	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F1	fm	BL8555-41FRA	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F1	fm	BL8555-41FRB	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F1	fm	LR8555-41FQ	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F1	fm	LR8555-41FRA	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F1	fm	LR8555-41FRB	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F1	fp	BL8555-21FQ	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F1	fp	BL8555-21FRA	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F1	fp	BL8555-21FRB	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F1	fp	LR8555-21FQ	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F1	fp	LR8555-21FRA	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F1	fp	LR8555-21FRB	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F10	-	R1224N102F	DC-DC-IC	PWM/VFM step-down, 1V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
F10	ed	XC9216A106M	DC-DC-IC	PWM/PFM st-dwn, 1.0V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F11	ed	XC9216A116M	DC-DC-IC	PWM/PFM st-dwn, 1.1V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F12	-	R1224N122F	DC-DC-IC	PWM/VFM step-down, 1.2V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
F12	-	RP173N121D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F12	-	SMF12	TVS	Quad, Vrwm=12.0V, Vbr=13.3V, Ipp=8A, 200W(1ms)	SC-70-5L	28	D16	6a	Smt
F12	ed	XC9216A126M	DC-DC-IC	PWM/PFM st-dwn, 1.2V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F13	-	RP173N131D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F13	-	TC53C5102ECT	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
F13	ed	XC9216A136M	DC-DC-IC	PWM/PFM st-dwn, 1.3V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
f14	-	XC7SH14GV	CMOS-Log	Inverting Schmitt-trigger	SOT753	28	Log7	6a	Nxp
F14	-	RP173N141D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F14	ed	XC9216A146M	DC-DC-IC	PWM/PFM st-dwn, 1.4V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F15	-	R1224N152F	DC-DC-IC	PWM/VFM step-down, 1.5V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
F15	-	RP173N151D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F15	eb	XC6367F152MR	DC-DC-IC	PWM step-up, 1.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F15	ed	XC9216A156M	DC-DC-IC	PWM/PFM st-dwn, 1.5V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F16	-	RP173N161D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F16	eb	XC6367F162MR	DC-DC-IC	PWM step-up, 1.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F16	ed	XC9216A166M	DC-DC-IC	PWM/PFM st-dwn, 1.6V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F17	-	RP173N171D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F17	eb	XC6367F172MR	DC-DC-IC	PWM step-up, 1.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F17	ed	XC9216A176M	DC-DC-IC	PWM/PFM st-dwn, 1.7V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F18	-	R1224N182F	DC-DC-IC	PWM/VFM step-down, 1.8V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
F18	-	RP173N181D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F18	eb	XC6367F182MR	DC-DC-IC	PWM step-up, 1.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F18	ed	XC9216A186M	DC-DC-IC	PWM/PFM st-dwn, 1.8V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F19	-	RP173N191D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F19	eb	XC6367F192MR	DC-DC-IC	PWM step-up, 1.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F19	ed	XC9216A196M	DC-DC-IC	PWM/PFM st-dwn, 1.9V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F1A	-	R1118N081D	LVR-IC	0.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1A	ed	XC9216A10CM	DC-DC-IC	PWM/PFM st-dwn, 1.0V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F1B	-	R1118N091D	LVR-IC	0.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1B	ed	XC9216A11CM	DC-DC-IC	PWM/PFM st-dwn, 1.1V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F1C	-	R1118N101D	LVR-IC	1.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1C	ed	XC9216A12CM	DC-DC-IC	PWM/PFM st-dwn, 1.2V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F1D	-	R1118N111D	LVR-IC	1.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1D	ed	XC9216A13CM	DC-DC-IC	PWM/PFM st-dwn, 1.3V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F1E	-	R1118N121D	LVR-IC	1.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1F	-	R1118N121D5	LVR-IC	1.25V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1F	eb	XC6367F153MR	DC-DC-IC	PWM step-up, 1.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F1F	ed	XC9216A14CM	DC-DC-IC	PWM/PFM st-dwn, 1.4V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F1F	ed	XC9216A15CM	DC-DC-IC	PWM/PFM st-dwn, 1.5V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F1G	-	R1118N131D	LVR-IC	1.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1H	-	R1118N141D	LVR-IC	1.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1H	eb	XC6367F163MR	DC-DC-IC	PWM step-up, 1.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F1H	ed	XC9216A16CM	DC-DC-IC	PWM/PFM st-dwn, 1.6V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F1J	-	R1118N151D	LVR-IC	1.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1K	-	R1118N161D	LVR-IC	1.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1K	eb	XC6367F173MR	DC-DC-IC	PWM step-up, 1.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F1K	ed	XC9216A17CM	DC-DC-IC	PWM/PFM st-dwn, 1.7V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F1L	-	R1118N171D	LVR-IC	1.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1L	eb	XC6367F183MR	DC-DC-IC	PWM step-up, 1.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F1L	ed	XC9216A18CM	DC-DC-IC	PWM/PFM st-dwn, 1.8V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F1M	-	R1118N181D	LVR-IC	1.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1M	eb	XC6367F193MR	DC-DC-IC	PWM step-up, 1.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F1M	ed	XC9216A19CM	DC-DC-IC	PWM/PFM st-dwn, 1.9V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F1N	-	R1118N181D5	LVR-IC	1.85V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1P	-	R1118N191D	LVR-IC	1.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1Q	-	R1118N201D	LVR-IC	2.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1R	-	R1118N211D	LVR-IC	2.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1S	-	R1118N221D	LVR-IC	2.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1T	-	R1118N231D	LVR-IC	2.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1U	-	R1118N241D	LVR-IC	2.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1V	-	R1118N251D	LVR-IC	2.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1W	-	R1118N261D	LVR-IC	2.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1X	-	R1118N271D	LVR-IC	2.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F1Y	-	R1118N281D	LVR-IC	2.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F1Z	-	R1118N281D5	LVR-IC	2.85V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
f2	-	BD45E412G-M	Vdet-IC	4.1V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
F2	-	BL8555-12FQ	LVR-IC	LDO, 1.2V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F2	-	BL8555-12FRA	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F2	-	BL8555-12FRB	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F2	-	BU15TD3WG	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
F2	-	ELM7SH08MB	CMOS-Log	2-input AND gate	SOT-25	28	Log3	6g	Elm
F2	-	ELM7SH08TB	CMOS-Log	2-input AND gate	SC-88A	28	Log3	6g	Elm
F2	-	ELM89222B	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
F2	-	HD74HCT1G08CM	CMOS-Log	2-input AND gate	CMPAK-5	28	Log3	6a	Ren
F2	-	LR8555-12FQ	LVR-IC	LDO, 1.2V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F2	-	LR8555-12FRA	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F2	-	LR8555-12FRB	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F2	-	R1111N221B	LVR-IC	LDO, Low noise, 2.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F2	ea	BL8555-12RQ	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F2	ea	BL8555-12RRA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F2	ea	BL8555-12RRB	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F2	ea	LR8555-12RQ	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F2	ea	LR8555-12RRA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F2	ea	LR8555-12RRB	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F2	ea	RN5VD52AA	Vdet-IC	5.2V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
F2	eu	BL8555-22RQ	LVR-IC	LDO, 2.2V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F2	eu	BL8555-22RRA	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F2	eu	BL8555-22RRB	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F2	eu	LR8555-22RQ	LVR-IC	LDO, 2.2V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F2	eu	LR8555-22RRA	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F2	eu	LR8555-22RRB	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F2	fg	BL8555-32RQ	LVR-IC	LDO, 3.2V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F2	fg	BL8555-32RRA	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F2	fg	BL8555-32RRB	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F2	fg	LR8555-32RQ	LVR-IC	LDO, 3.2V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F2	fg	LR8555-32RRA	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F2	fg	LR8555-32RRB	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F2	fh	BL8555-42RQ	LVR-IC	LDO, 4.2V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F2	fh	BL8555-42RRA	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F2	fh	BL8555-42RRB	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F2	fh	LR8555-42RQ	LVR-IC	LDO, 4.2V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F2	fh	LR8555-42RRA	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F2	fh	LR8555-42RRB	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F2	fk	BL8555-32FQ	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F2	fk	BL8555-32FRA	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F2	fk	BL8555-32FRB	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F2	fk	LR8555-32FQ	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F2	fk	LR8555-32FRA	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F2	fk	LR8555-32FRB	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F2	fm	BL8555-42FQ	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F2	fm	BL8555-42FRA	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F2	fm	BL8555-42FRB	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F2	fm	LR8555-42FQ	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F2	fm	LR8555-42FRA	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F2	fm	LR8555-42FRB	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F2	fp	BL8555-22FQ	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F2	fp	BL8555-22FRA	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F2	fp	BL8555-22FRB	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F2	fp	LR8555-22FQ	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F2	fp	LR8555-22FRA	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F2	fp	LR8555-22FRB	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F20	-	RP173N201D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F20	eb	XC6367F202MR	DC-DC-IC	PWM step-up, 2.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F20	ed	XC9216A206M	DC-DC-IC	PWM/PFM st-dwn, 2.0V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F21	-	RP173N211D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F21	eb	XC6367F212MR	DC-DC-IC	PWM step-up, 2.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F21	ed	XC9216A216M	DC-DC-IC	PWM/PFM st-dwn, 2.1V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F212CG	-	UR6225G-12-AF5-C	LVR-IC	1.2V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F212CL	-	UR6225L-12-AF5-C	LVR-IC	1.2V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F212FG	-	UR6225G-12-AF5-F	LVR-IC	1.2V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F212FL	-	UR6225L-12-AF5-F	LVR-IC	1.2V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F213CG	-	UR6225G-13-AF5-C	LVR-IC	1.3V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F213CL	-	UR6225L-13-AF5-C	LVR-IC	1.3V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F213FG	-	UR6225G-13-AF5-F	LVR-IC	1.3V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F213FL	-	UR6225L-13-AF5-F	LVR-IC	1.3V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F214CG	-	UR6225G-14-AF5-C	LVR-IC	1.4V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F214CL	-	UR6225L-14-AF5-C	LVR-IC	1.4V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F214FG	-	UR6225G-14-AF5-F	LVR-IC	1.4V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F214FL	-	UR6225L-14-AF5-F	LVR-IC	1.4V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F215CG	-	UR6225G-15-AF5-C	LVR-IC	1.5V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F215CL	-	UR6225L-15-AF5-C	LVR-IC	1.5V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F215FG	-	UR6225G-15-AF5-F	LVR-IC	1.5V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F215FL	-	UR6225L-15-AF5-F	LVR-IC	1.5V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F216CG	-	UR6225G-16-AF5-C	LVR-IC	1.6V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F216CL	-	UR6225L-16-AF5-C	LVR-IC	1.6V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F216FG	-	UR6225G-16-AF5-F	LVR-IC	1.6V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F216FL	-	UR6225L-16-AF5-F	LVR-IC	1.6V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F217CG	-	UR6225G-17-AF5-C	LVR-IC	1.7V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F217CL	-	UR6225L-17-AF5-C	LVR-IC	1.7V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F217FG	-	UR6225G-17-AF5-F	LVR-IC	1.7V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F217FL	-	UR6225L-17-AF5-F	LVR-IC	1.7V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F218CG	-	UR6225G-18-AF5-C	LVR-IC	1.8V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F218CL	-	UR6225L-18-AF5-C	LVR-IC	1.8V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F218FG	-	UR6225G-18-AF5-F	LVR-IC	1.8V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F218FL	-	UR6225L-18-AF5-F	LVR-IC	1.8V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F219CG	-	UR6225G-19-AF5-C	LVR-IC	1.9V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F219CL	-	UR6225L-19-AF5-C	LVR-IC	1.9V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F219FG	-	UR6225G-19-AF5-F	LVR-IC	1.9V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F219FL	-	UR6225L-19-AF5-F	LVR-IC	1.9V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F22	-	RP173N221D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F22	eb	XC6367F222MR	DC-DC-IC	PWM step-up, 2.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F22	ed	XC9216A226M	DC-DC-IC	PWM/PFM st-dwn, 2.2V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F220CG	-	UR6225G-20-AF5-C	LVR-IC	2.0V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F220CL	-	UR6225L-20-AF5-C	LVR-IC	2.0V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F220FG	-	UR6225G-20-AF5-F	LVR-IC	2.0V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F220FL	-	UR6225L-20-AF5-F	LVR-IC	2.0V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F221CG	-	UR6225G-21-AF5-C	LVR-IC	2.1V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F221CL	-	UR6225L-21-AF5-C	LVR-IC	2.1V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F221FG	-	UR6225G-21-AF5-F	LVR-IC	2.1V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F221FL	-	UR6225L-21-AF5-F	LVR-IC	2.1V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F222CG	-	UR6225G-22-AF5-C	LVR-IC	2.2V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F222CL	-	UR6225L-22-AF5-C	LVR-IC	2.2V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F222FG	-	UR6225G-22-AF5-F	LVR-IC	2.2V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F222FL	-	UR6225L-22-AF5-F	LVR-IC	2.2V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F223CG	-	UR6225G-23-AF5-C	LVR-IC	2.3V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F223CL	-	UR6225L-23-AF5-C	LVR-IC	2.3V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F223FG	-	UR6225G-23-AF5-F	LVR-IC	2.3V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F223FL	-	UR6225L-23-AF5-F	LVR-IC	2.3V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F224CG	-	UR6225G-24-AF5-C	LVR-IC	2.4V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F224CL	-	UR6225L-24-AF5-C	LVR-IC	2.4V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F224FG	-	UR6225G-24-AF5-F	LVR-IC	2.4V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F224FL	-	UR6225L-24-AF5-F	LVR-IC	2.4V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F225CG	-	UR6225G-25-AF5-C	LVR-IC	2.5V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F225CL	-	UR6225L-25-AF5-C	LVR-IC	2.5V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F225FG	-	UR6225G-25-AF5-F	LVR-IC	2.5V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F225FL	-	UR6225L-25-AF5-F	LVR-IC	2.5V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F226CG	-	UR6225G-26-AF5-C	LVR-IC	2.6V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F226CL	-	UR6225L-26-AF5-C	LVR-IC	2.6V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F226FG	-	UR6225G-26-AF5-F	LVR-IC	2.6V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F226FL	-	UR6225L-26-AF5-F	LVR-IC	2.6V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F227CG	-	UR6225G-27-AF5-C	LVR-IC	2.7V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F227CL	-	UR6225L-27-AF5-C	LVR-IC	2.7V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F227FG	-	UR6225G-27-AF5-F	LVR-IC	2.7V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F227FL	-	UR6225L-27-AF5-F	LVR-IC	2.7V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F228CG	-	UR6225G-28-AF5-C	LVR-IC	2.8V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F228CL	-	UR6225L-28-AF5-C	LVR-IC	2.8V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F228FG	-	UR6225G-28-AF5-F	LVR-IC	2.8V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F228FL	-	UR6225L-28-AF5-F	LVR-IC	2.8V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F229CG	-	UR6225G-29-AF5-C	LVR-IC	2.9V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F229CL	-	UR6225L-29-AF5-C	LVR-IC	2.9V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F229FG	-	UR6225G-29-AF5-F	LVR-IC	2.9V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F229FL	-	UR6225L-29-AF5-F	LVR-IC	2.9V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F23	-	RP173N231D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F23	-	TC53C5202ECT	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F23	eb	XC6367F232MR	DC-DC-IC	PWM step-up, 2.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F23	ed	XC9216A236M	DC-DC-IC	PWM/PFM st-dwn, 2.3V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F230CG	-	UR6225G-30-AF5-C	LVR-IC	3.0V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F230CL	-	UR6225L-30-AF5-C	LVR-IC	3.0V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F230FG	-	UR6225G-30-AF5-F	LVR-IC	3.0V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F230FL	-	UR6225L-30-AF5-F	LVR-IC	3.0V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F231CG	-	UR6225G-31-AF5-C	LVR-IC	3.1V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F231CL	-	UR6225L-31-AF5-C	LVR-IC	3.1V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F231FG	-	UR6225G-31-AF5-F	LVR-IC	3.1V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F231FL	-	UR6225L-31-AF5-F	LVR-IC	3.1V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F232CG	-	UR6225G-32-AF5-C	LVR-IC	3.2V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F232CL	-	UR6225L-32-AF5-C	LVR-IC	3.2V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F232FG	-	UR6225G-32-AF5-F	LVR-IC	3.2V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F232FL	-	UR6225L-32-AF5-F	LVR-IC	3.2V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F233CG	-	UR6225G-33-AF5-C	LVR-IC	3.3V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F233CL	-	UR6225L-33-AF5-C	LVR-IC	3.3V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F233FG	-	UR6225G-33-AF5-F	LVR-IC	3.3V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F233FL	-	UR6225L-33-AF5-F	LVR-IC	3.3V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F234CG	-	UR6225G-34-AF5-C	LVR-IC	3.4V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F234CL	-	UR6225L-34-AF5-C	LVR-IC	3.4V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F234FG	-	UR6225G-34-AF5-F	LVR-IC	3.4V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F234FL	-	UR6225L-34-AF5-F	LVR-IC	3.4V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F235CG	-	UR6225G-35-AF5-C	LVR-IC	3.5V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F235CL	-	UR6225L-35-AF5-C	LVR-IC	3.5V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F235FG	-	UR6225G-35-AF5-F	LVR-IC	3.5V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F235FL	-	UR6225L-35-AF5-F	LVR-IC	3.5V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F236CG	-	UR6225G-36-AF5-C	LVR-IC	3.6V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F236CL	-	UR6225L-36-AF5-C	LVR-IC	3.6V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F236FG	-	UR6225G-36-AF5-F	LVR-IC	3.6V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F236FL	-	UR6225L-36-AF5-F	LVR-IC	3.6V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F237CG	-	UR6225G-37-AF5-C	LVR-IC	3.7V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F237CL	-	UR6225L-37-AF5-C	LVR-IC	3.7V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F237FG	-	UR6225G-37-AF5-F	LVR-IC	3.7V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F237FL	-	UR6225L-37-AF5-F	LVR-IC	3.7V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F238CG	-	UR6225G-38-AF5-C	LVR-IC	3.8V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F238CL	-	UR6225L-38-AF5-C	LVR-IC	3.8V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F238FG	-	UR6225G-38-AF5-F	LVR-IC	3.8V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F238FL	-	UR6225L-38-AF5-F	LVR-IC	3.8V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F239CG	-	UR6225G-39-AF5-C	LVR-IC	3.9V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F239CL	-	UR6225L-39-AF5-C	LVR-IC	3.9V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F239FG	-	UR6225G-39-AF5-F	LVR-IC	3.9V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F239FL	-	UR6225L-39-AF5-F	LVR-IC	3.9V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F24	-	RP173N241D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F24	eb	XC6367F242MR	DC-DC-IC	PWM step-up, 2.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F24	ed	XC9216A246M	DC-DC-IC	PWM/PFM st-dwn, 2.4V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F240CG	-	UR6225G-40-AF5-C	LVR-IC	4.0V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F240CL	-	UR6225L-40-AF5-C	LVR-IC	4.0V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F240FG	-	UR6225G-40-AF5-F	LVR-IC	4.0V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F240FL	-	UR6225L-40-AF5-F	LVR-IC	4.0V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F241CG	-	UR6225G-41-AF5-C	LVR-IC	4.1V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F241CL	-	UR6225L-41-AF5-C	LVR-IC	4.1V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F241FG	-	UR6225G-41-AF5-F	LVR-IC	4.1V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F241FL	-	UR6225L-41-AF5-F	LVR-IC	4.1V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F242CG	-	UR6225G-42-AF5-C	LVR-IC	4.2V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F242CL	-	UR6225L-42-AF5-C	LVR-IC	4.2V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F242FG	-	UR6225G-42-AF5-F	LVR-IC	4.2V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F242FL	-	UR6225L-42-AF5-F	LVR-IC	4.2V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F243CG	-	UR6225G-43-AF5-C	LVR-IC	4.3V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F243CL	-	UR6225L-43-AF5-C	LVR-IC	4.3V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F243FG	-	UR6225G-43-AF5-F	LVR-IC	4.3V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F243FL	-	UR6225L-43-AF5-F	LVR-IC	4.3V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F244CG	-	UR6225G-44-AF5-C	LVR-IC	4.4V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F244CL	-	UR6225L-44-AF5-C	LVR-IC	4.4V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F244FG	-	UR6225G-44-AF5-F	LVR-IC	4.4V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F244FL	-	UR6225L-44-AF5-F	LVR-IC	4.4V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F245CG	-	UR6225G-45-AF5-C	LVR-IC	4.5V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F245CL	-	UR6225L-45-AF5-C	LVR-IC	4.5V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F245FG	-	UR6225G-45-AF5-F	LVR-IC	4.5V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F245FL	-	UR6225L-45-AF5-F	LVR-IC	4.5V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F246CG	-	UR6225G-46-AF5-C	LVR-IC	4.6V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F246CL	-	UR6225L-46-AF5-C	LVR-IC	4.6V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F246FG	-	UR6225G-46-AF5-F	LVR-IC	4.6V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F246FL	-	UR6225L-46-AF5-F	LVR-IC	4.6V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F247CG	-	UR6225G-47-AF5-C	LVR-IC	4.7V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F247CL	-	UR6225L-47-AF5-C	LVR-IC	4.7V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F247FG	-	UR6225G-47-AF5-F	LVR-IC	4.7V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F247FL	-	UR6225L-47-AF5-F	LVR-IC	4.7V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F248CG	-	UR6225G-48-AF5-C	LVR-IC	4.8V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F248CL	-	UR6225L-48-AF5-C	LVR-IC	4.8V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F248FG	-	UR6225G-48-AF5-F	LVR-IC	4.8V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F248FL	-	UR6225L-48-AF5-F	LVR-IC	4.8V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F249CG	-	UR6225G-49-AF5-C	LVR-IC	4.9V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F249CL	-	UR6225L-49-AF5-C	LVR-IC	4.9V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F249FG	-	UR6225G-49-AF5-F	LVR-IC	4.9V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F249FL	-	UR6225L-49-AF5-F	LVR-IC	4.9V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
f25	-	XC7SH125GV	CMOS-Log	Bus buffer gate with 3-state output	SOT753	28	Log14	6a	Nxp
F25	-	R1224N252F	DC-DC-IC	PWM/VFM step-down, 2.5V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
F25	-	RP173N251D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F25	eb	XC6367F252MR	DC-DC-IC	PWM step-up, 2.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F25	ed	XC9216A256M	DC-DC-IC	PWM/PFM st-dwn, 2.5V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F250CG	-	UR6225G-50-AF5-C	LVR-IC	5.0V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F250CL	-	UR6225L-50-AF5-C	LVR-IC	5.0V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F250FG	-	UR6225G-50-AF5-F	LVR-IC	5.0V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F250FL	-	UR6225L-50-AF5-F	LVR-IC	5.0V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F251CG	-	UR6225G-51-AF5-C	LVR-IC	5.1V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F251CL	-	UR6225L-51-AF5-C	LVR-IC	5.1V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F251FG	-	UR6225G-51-AF5-F	LVR-IC	5.1V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F251FL	-	UR6225L-51-AF5-F	LVR-IC	5.1V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F252CG	-	UR6225G-52-AF5-C	LVR-IC	5.2V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F252CL	-	UR6225L-52-AF5-C	LVR-IC	5.2V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F252FG	-	UR6225G-52-AF5-F	LVR-IC	5.2V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F252FL	-	UR6225L-52-AF5-F	LVR-IC	5.2V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F253CG	-	UR6225G-53-AF5-C	LVR-IC	5.3V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F253CL	-	UR6225L-53-AF5-C	LVR-IC	5.3V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F253FG	-	UR6225G-53-AF5-F	LVR-IC	5.3V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F253FL	-	UR6225L-53-AF5-F	LVR-IC	5.3V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F254CG	-	UR6225G-54-AF5-C	LVR-IC	5.4V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F254CL	-	UR6225L-54-AF5-C	LVR-IC	5.4V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F254FG	-	UR6225G-54-AF5-F	LVR-IC	5.4V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F254FL	-	UR6225L-54-AF5-F	LVR-IC	5.4V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F255CG	-	UR6225G-55-AF5-C	LVR-IC	5.5V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F255CL	-	UR6225L-55-AF5-C	LVR-IC	5.5V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F255FG	-	UR6225G-55-AF5-F	LVR-IC	5.5V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F255FL	-	UR6225L-55-AF5-F	LVR-IC	5.5V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F256CG	-	UR6225G-56-AF5-C	LVR-IC	5.6V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F256CL	-	UR6225L-56-AF5-C	LVR-IC	5.6V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F256FG	-	UR6225G-56-AF5-F	LVR-IC	5.6V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F256FL	-	UR6225L-56-AF5-F	LVR-IC	5.6V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F257CG	-	UR6225G-57-AF5-C	LVR-IC	5.7V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F257CL	-	UR6225L-57-AF5-C	LVR-IC	5.7V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F257FG	-	UR6225G-57-AF5-F	LVR-IC	5.7V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F257FL	-	UR6225L-57-AF5-F	LVR-IC	5.7V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F258CG	-	UR6225G-58-AF5-C	LVR-IC	5.8V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F258CL	-	UR6225L-58-AF5-C	LVR-IC	5.8V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F258FG	-	UR6225G-58-AF5-F	LVR-IC	5.8V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F258FL	-	UR6225L-58-AF5-F	LVR-IC	5.8V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F259CG	-	UR6225G-59-AF5-C	LVR-IC	5.9V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F259CL	-	UR6225L-59-AF5-C	LVR-IC	5.9V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F259FG	-	UR6225G-59-AF5-F	LVR-IC	5.9V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F259FL	-	UR6225L-59-AF5-F	LVR-IC	5.9V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F26	-	RP173N261D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F26	eb	XC6367F262MR	DC-DC-IC	PWM step-up, 2.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F26	ed	XC9216A266M	DC-DC-IC	PWM/PFM st-dwn, 2.6V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F260CG	-	UR6225G-60-AF5-C	LVR-IC	6.0V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F260CL	-	UR6225L-60-AF5-C	LVR-IC	6.0V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F260FG	-	UR6225G-60-AF5-F	LVR-IC	6.0V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F260FL	-	UR6225L-60-AF5-F	LVR-IC	6.0V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F27	-	RP173N271D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F27	eb	XC6367F272MR	DC-DC-IC	PWM step-up, 2.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F27	ed	XC9216A276M	DC-DC-IC	PWM/PFM st-dwn, 2.7V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F28	-	RP173N281D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F28	eb	XC6367F282MR	DC-DC-IC	PWM step-up, 2.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F28	ed	XC9216A286M	DC-DC-IC	PWM/PFM st-dwn, 2.8V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F29	-	RP173N291D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F29	eb	XC6367F292MR	DC-DC-IC	PWM step-up, 2.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F29	ed	XC9216A296M	DC-DC-IC	PWM/PFM st-dwn, 2.9V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F2A	eb	XC6367F203MR	DC-DC-IC	PWM step-up, 2.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F2A	ed	XC9216A20CM	DC-DC-IC	PWM/PFM st-dwn, 2.0V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F2B	eb	XC6367F213MR	DC-DC-IC	PWM step-up, 2.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F2B	ed	XC9216A21CM	DC-DC-IC	PWM/PFM st-dwn, 2.1V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F2C	eb	XC6367F223MR	DC-DC-IC	PWM step-up, 2.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F2C	ed	XC9216A22CM	DC-DC-IC	PWM/PFM st-dwn, 2.2V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F2D	eb	XC6367F233MR	DC-DC-IC	PWM step-up, 2.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F2D	ed	XC9216A23CM	DC-DC-IC	PWM/PFM st-dwn, 2.3V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F2E	eb	XC6367F243MR	DC-DC-IC	PWM step-up, 2.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F2E	ed	XC9216A24CM	DC-DC-IC	PWM/PFM st-dwn, 2.4V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F2F	eb	XC6367F253MR	DC-DC-IC	PWM step-up, 2.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F2F	ed	XC9216A25CM	DC-DC-IC	PWM/PFM st-dwn, 2.5V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F2H	eb	XC6367F263MR	DC-DC-IC	PWM step-up, 2.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F2H	ed	XC9216A26CM	DC-DC-IC	PWM/PFM st-dwn, 2.6V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F2JCG	-	UR6225G-285-AF5-C	LVR-IC	2.85V±2%, 100mA, halogen free	SOT-23-5	28ym	VR1	6a	Utc
F2JCL	-	UR6225L-285-AF5-C	LVR-IC	2.85V±2%, 100mA, lead free	SOT-23-5	28ym	VR1	6a	Utc
F2JFG	-	UR6225G-285-AF5-F	LVR-IC	2.85V±2%, 100mA, halogen free	SOT-23-5	28vu	VR1	6a	Utc
F2JFL	-	UR6225L-285-AF5-F	LVR-IC	2.85V±2%, 100mA, lead free	SOT-23-5	28vu	VR1	6a	Utc
F2K	eb	XC6367F273MR	DC-DC-IC	PWM step-up, 2.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F2K	ed	XC9216A27CM	DC-DC-IC	PWM/PFM st-dwn, 2.7V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F2L	eb	XC6367F283MR	DC-DC-IC	PWM step-up, 2.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F2L	ed	XC9216A28CM	DC-DC-IC	PWM/PFM st-dwn, 2.8V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F2M	eb	XC6367F293MR	DC-DC-IC	PWM step-up, 2.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F2M	ed	XC9216A29CM	DC-DC-IC	PWM/PFM st-dwn, 2.9V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
f3	-	BD45E422G-M	Vdet-IC	4.2V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
F3	-	BL8555-13FQ	LVR-IC	LDO, 1.3V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F3	-	BL8555-13FRA	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F3	-	BL8555-13FRB	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F3	-	BU18TD3WG	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
F3	-	ELM7SH02MB	CMOS-Log	2-input NOR gate	SOT-25	28	Log2	6g	Elm
F3	-	ELM7SH02TB	CMOS-Log	2-input NOR gate	SC-88A	28	Log2	6g	Elm
F3	-	ELM89232B	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
F3	-	HD74HCT1G02CM	CMOS-Log	2-input NOR gate	CMPAK-5	28	Log2	6a	Ren
F3	-	LR8555-13FQ	LVR-IC	LDO, 1.3V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F3	-	LR8555-13FRA	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F3	-	LR8555-13FRB	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F3	-	R1111N231B	LVR-IC	LDO, Low noise, 2.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F3	ea	BL8555-13RQ	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F3	ea	BL8555-13RRA	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F3	ea	BL8555-13RRB	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F3	ea	LR8555-13RQ	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F3	ea	LR8555-13RRA	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F3	ea	LR8555-13RRB	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F3	ea	RN5VD53AA	Vdet-IC	5.3V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
F3	eu	BL8555-23RQ	LVR-IC	LDO, 2.3V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F3	eu	BL8555-23RRA	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F3	eu	BL8555-23RRB	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F3	eu	LR8555-23RQ	LVR-IC	LDO, 2.3V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F3	eu	LR8555-23RRA	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F3	eu	LR8555-23RRB	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F3	fg	BL8555-33RQ	LVR-IC	LDO, 3.3V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F3	fg	BL8555-33RRA	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F3	fg	BL8555-33RRB	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F3	fg	LR8555-33RQ	LVR-IC	LDO, 3.3V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F3	fg	LR8555-33RRA	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F3	fg	LR8555-33RRB	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F3	fh	BL8555-43RQ	LVR-IC	LDO, 4.3V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F3	fh	BL8555-43RRA	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F3	fh	BL8555-43RRB	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F3	fh	LR8555-43RQ	LVR-IC	LDO, 4.3V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F3	fh	LR8555-43RRA	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F3	fh	LR8555-43RRB	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F3	fk	BL8555-33FQ	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F3	fk	BL8555-33FRA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F3	fk	BL8555-33FRB	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F3	fk	LR8555-33FQ	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F3	fk	LR8555-33FRA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F3	fk	LR8555-33FRB	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F3	fm	BL8555-43FQ	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F3	fm	BL8555-43FRA	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F3	fm	BL8555-43FRB	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F3	fm	LR8555-43FQ	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F3	fm	LR8555-43FRA	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F3	fm	LR8555-43FRB	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F3	fp	BL8555-23FQ	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F3	fp	BL8555-23FRA	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F3	fp	BL8555-23FRB	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F3	fp	LR8555-23FQ	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F3	fp	LR8555-23FRA	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F3	fp	LR8555-23FRB	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F30	-	R1224N302F	DC-DC-IC	PWM/VFM step-down, 3V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
F30	-	RP173N301D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F30	eb	XC6367F302MR	DC-DC-IC	PWM step-up, 3.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F30	ed	XC9216A306M	DC-DC-IC	PWM/PFM st-dwn, 3.0V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F31	-	RP173N311D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F31	eb	XC6367F312MR	DC-DC-IC	PWM step-up, 3.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F31	ed	XC9216A316M	DC-DC-IC	PWM/PFM st-dwn, 3.1V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
f32	-	XC7SH32GV	CMOS-Log	2-input OR gate	SOT753	28	Log4	6a	Nxp
F32	-	74AUC1G32GV	CMOS-Log	2-input OR gate	SOT753	28	Log4	6a	Nxp
F32	-	RP173N321D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F32	eb	XC6367F322MR	DC-DC-IC	PWM step-up, 3.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F32	ed	XC9216A326M	DC-DC-IC	PWM/PFM st-dwn, 3.2V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F33	-	R1224N332F	DC-DC-IC	PWM/VFM step-down, 3.3V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
F33	-	RP173N331D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F33	-	TC53C5302ECT	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
F33	eb	XC6367F332MR	DC-DC-IC	PWM step-up, 3.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F33	ed	XC9216A336M	DC-DC-IC	PWM/PFM st-dwn, 3.3V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F34	-	RP173N341D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F34	eb	XC6367F342MR	DC-DC-IC	PWM step-up, 3.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F34	ed	XC9216A346M	DC-DC-IC	PWM/PFM st-dwn, 3.4V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F35	-	RP173N351D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F35	eb	XC6367F352MR	DC-DC-IC	PWM step-up, 3.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F35	ed	XC9216A356M	DC-DC-IC	PWM/PFM st-dwn, 3.5V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F36	-	RP173N361D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F36	eb	XC6367F362MR	DC-DC-IC	PWM step-up, 3.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F36	ed	XC9216A366M	DC-DC-IC	PWM/PFM st-dwn, 3.6V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F37	-	RP173N371D	LVR-IC	LDO, 3.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F37	eb	XC6367F372MR	DC-DC-IC	PWM step-up, 3.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F37	ed	XC9216A376M	DC-DC-IC	PWM/PFM st-dwn, 3.7V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F38	-	RP173N381D	LVR-IC	LDO, 3.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F38	eb	XC6367F382MR	DC-DC-IC	PWM step-up, 3.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F38	ed	XC9216A386M	DC-DC-IC	PWM/PFM st-dwn, 3.8V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F39	-	RP173N391D	LVR-IC	LDO, 3.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F39	eb	XC6367F392MR	DC-DC-IC	PWM step-up, 3.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F39	ed	XC9216A396M	DC-DC-IC	PWM/PFM st-dwn, 3.9V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F3A	eb	XC6367F303MR	DC-DC-IC	PWM step-up, 3.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F3A	ed	XC9216A30CM	DC-DC-IC	PWM/PFM st-dwn, 3.0V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F3B	eb	XC6367F313MR	DC-DC-IC	PWM step-up, 3.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F3B	ed	XC9216A31CM	DC-DC-IC	PWM/PFM st-dwn, 3.1V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F3C	eb	XC6367F323MR	DC-DC-IC	PWM step-up, 3.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F3C	ed	XC9216A32CM	DC-DC-IC	PWM/PFM st-dwn, 3.2V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F3D	eb	XC6367F333MR	DC-DC-IC	PWM step-up, 3.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F3D	ed	XC9216A33CM	DC-DC-IC	PWM/PFM st-dwn, 3.3V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F3E	eb	XC6367F343MR	DC-DC-IC	PWM step-up, 3.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F3E	ed	XC9216A34CM	DC-DC-IC	PWM/PFM st-dwn, 3.4V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F3F	eb	XC6367F353MR	DC-DC-IC	PWM step-up, 3.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F3F	ed	XC9216A35CM	DC-DC-IC	PWM/PFM st-dwn, 3.5V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F3H	eb	XC6367F363MR	DC-DC-IC	PWM step-up, 3.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F3H	ed	XC9216A36CM	DC-DC-IC	PWM/PFM st-dwn, 3.6V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F3K	eb	XC6367F373MR	DC-DC-IC	PWM step-up, 3.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F3K	ed	XC9216A37CM	DC-DC-IC	PWM/PFM st-dwn, 3.7V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F3L	eb	XC6367F383MR	DC-DC-IC	PWM step-up, 3.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F3L	ed	XC9216A38CM	DC-DC-IC	PWM/PFM st-dwn, 3.8V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F3M	eb	XC6367F393MR	DC-DC-IC	PWM step-up, 3.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F3M	ed	XC9216A39CM	DC-DC-IC	PWM/PFM st-dwn, 3.9V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
f4	-	BD45E432G-M	Vdet-IC	4.3V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
F4	-	BL8555-14FQ	LVR-IC	LDO, 1.4V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F4	-	BL8555-14FRA	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F4	-	BL8555-14FRB	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F4	-	BU1JTD3WG	LVR-IC	LDO, 1.85V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
F4	-	ELM7SH32MB	CMOS-Log	2-input OR gate	SOT-25	28	Log4	6g	Elm
F4	-	ELM7SH32TB	CMOS-Log	2-input OR gate	SC-88A	28	Log4	6g	Elm
F4	-	ELM89242B	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
F4	-	HD74HCT1G32CM	CMOS-Log	2-input OR gate	CMPAK-5	28	Log4	6a	Ren
F4	-	LR8555-14FQ	LVR-IC	LDO, 1.4V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F4	-	LR8555-14FRA	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F4	-	LR8555-14FRB	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F4	-	R1111N241B	LVR-IC	LDO, Low noise, 2.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F4	ea	BL8555-14RQ	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F4	ea	BL8555-14RRA	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F4	ea	BL8555-14RRB	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F4	ea	LR8555-14RQ	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F4	ea	LR8555-14RRA	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F4	ea	LR8555-14RRB	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F4	ea	RN5VD54AA	Vdet-IC	5.4V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
F4	eu	BL8555-24RQ	LVR-IC	LDO, 2.4V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F4	eu	BL8555-24RRA	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F4	eu	BL8555-24RRB	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F4	eu	LR8555-24RQ	LVR-IC	LDO, 2.4V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F4	eu	LR8555-24RRA	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F4	eu	LR8555-24RRB	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F4	fg	BL8555-34RQ	LVR-IC	LDO, 3.4V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F4	fg	BL8555-34RRA	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F4	fg	BL8555-34RRB	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F4	fg	LR8555-34RQ	LVR-IC	LDO, 3.4V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F4	fg	LR8555-34RRA	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F4	fg	LR8555-34RRB	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F4	fh	BL8555-44RQ	LVR-IC	LDO, 4.4V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F4	fh	BL8555-44RRA	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F4	fh	BL8555-44RRB	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F4	fh	LR8555-44RQ	LVR-IC	LDO, 4.4V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F4	fh	LR8555-44RRA	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F4	fh	LR8555-44RRB	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F4	fk	BL8555-34FQ	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F4	fk	BL8555-34FRB	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F4	fk	BL8555-34PFA	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F4	fk	LR8555-34FQ	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F4	fk	LR8555-34FRB	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F4	fk	LR8555-34PFA	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F4	fm	BL8555-44FQ	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F4	fm	BL8555-44FRA	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F4	fm	BL8555-44FRB	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F4	fm	LR8555-44FQ	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F4	fm	LR8555-44FRA	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F4	fm	LR8555-44FRB	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F4	fp	BL8555-24FQ	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F4	fp	BL8555-24FRA	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F4	fp	BL8555-24FRB	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F4	fp	LR8555-24FQ	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F4	fp	LR8555-24FRA	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F4	fp	LR8555-24FRB	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F40	-	RP173N401D	LVR-IC	LDO, 4.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F40	eb	XC6367F402MR	DC-DC-IC	PWM step-up, 4.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F40	ed	XC9216A406M	DC-DC-IC	PWM/PFM st-dwn, 4.0V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F41	-	RP173N411D	LVR-IC	LDO, 4.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F41	eb	XC6367F412MR	DC-DC-IC	PWM step-up, 4.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F42	-	RP173N421D	LVR-IC	LDO, 4.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F42	eb	XC6367F422MR	DC-DC-IC	PWM step-up, 4.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F43	-	RP173N431D	LVR-IC	LDO, 4.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F43	-	TC53C5402ECT	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
F43	eb	XC6367F432MR	DC-DC-IC	PWM step-up, 4.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F44	-	RP173N441D	LVR-IC	LDO, 4.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F44	eb	XC6367F442MR	DC-DC-IC	PWM step-up, 4.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F45	-	RP173N451D	LVR-IC	LDO, 4.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F45	eb	XC6367F452MR	DC-DC-IC	PWM step-up, 4.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F46	-	RP173N461D	LVR-IC	LDO, 4.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F46	eb	XC6367F462MR	DC-DC-IC	PWM step-up, 4.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F47	-	RP173N471D	LVR-IC	LDO, 4.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F47	eb	XC6367F472MR	DC-DC-IC	PWM step-up, 4.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F48	-	RP173N481D	LVR-IC	LDO, 4.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F48	eb	XC6367F482MR	DC-DC-IC	PWM step-up, 4.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F49	-	RP173N491D	LVR-IC	LDO, 4.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F49	eb	XC6367F492MR	DC-DC-IC	PWM step-up, 4.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F4A	eb	XC6367F403MR	DC-DC-IC	PWM step-up, 4.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F4A	ed	XC9216A40CM	DC-DC-IC	PWM/PFM st-dwn, 4.0V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
F4B	eb	XC6367F413MR	DC-DC-IC	PWM step-up, 4.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F4C	eb	XC6367F423MR	DC-DC-IC	PWM step-up, 4.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F4D	eb	XC6367F433MR	DC-DC-IC	PWM step-up, 4.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F4E	eb	XC6367F443MR	DC-DC-IC	PWM step-up, 4.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F4F	eb	XC6367F453MR	DC-DC-IC	PWM step-up, 4.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F4H	eb	XC6367F463MR	DC-DC-IC	PWM step-up, 4.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F4K	eb	XC6367F473MR	DC-DC-IC	PWM step-up, 4.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F4L	eb	XC6367F483MR	DC-DC-IC	PWM step-up, 4.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F4M	eb	XC6367F493MR	DC-DC-IC	PWM step-up, 4.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
f5	-	BD45E442G-M	Vdet-IC	4.4V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
F5	-	BL8555-15FQ	LVR-IC	LDO, 1.5V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F5	-	BL8555-15FRA	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F5	-	BL8555-15FRB	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F5	-	BU19TD3WG	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
F5	-	ELM7SH04MB	CMOS-Log	Inverter	SOT-25	28	Log6	6g	Elm
F5	-	ELM7SH04TB	CMOS-Log	Inverter	SC-88A	28	Log6	6g	Elm
F5	-	ELM89252B	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
F5	-	HD74HCT1G04CM	CMOS-Log	Inverter	CMPAK-5	28	Log6	6a	Ren
F5	-	LR8555-15FQ	LVR-IC	LDO, 1.5V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F5	-	LR8555-15FRA	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F5	-	LR8555-15FRB	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F5	-	MC78PC25N	LVR-IC	LDO, LN, +CE, 2.5V±2.5%, 100mA	SOT-23-5	28cx	VR4	6b	Ons
F5	-	R1111N251B	LVR-IC	LDO, Low noise, 2.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F5	ea	BL8555-15RQ	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F5	ea	BL8555-15RRA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F5	ea	BL8555-15RRB	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F5	ea	LR8555-15RQ	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F5	ea	LR8555-15RRA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F5	ea	LR8555-15RRB	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F5	ea	RN5VD55AA	Vdet-IC	5.5V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
F5	eu	BL8555-25RQ	LVR-IC	LDO, 2.5V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F5	eu	BL8555-25RRA	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F5	eu	BL8555-25RRB	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F5	eu	LR8555-25RQ	LVR-IC	LDO, 2.5V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F5	eu	LR8555-25RRA	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F5	eu	LR8555-25RRB	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F5	fg	BL8555-35RQ	LVR-IC	LDO, 3.5V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F5	fg	BL8555-35RRA	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F5	fg	BL8555-35RRB	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F5	fg	LR8555-35RQ	LVR-IC	LDO, 3.5V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F5	fg	LR8555-35RRA	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F5	fg	LR8555-35RRB	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F5	fh	BL8555-45RQ	LVR-IC	LDO, 4.5V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F5	fh	BL8555-45RRA	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F5	fh	BL8555-45RRB	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F5	fh	LR8555-45RQ	LVR-IC	LDO, 4.5V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F5	fh	LR8555-45RRA	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F5	fh	LR8555-45RRB	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F5	fk	BL8555-35FQ	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F5	fk	BL8555-35FRA	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F5	fk	BL8555-35FRB	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F5	fk	LR8555-35FQ	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F5	fk	LR8555-35FRA	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F5	fk	LR8555-35FRB	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F5	fm	BL8555-45FQ	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F5	fm	BL8555-45FRA	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F5	fm	BL8555-45FRB	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F5	fm	LR8555-45FQ	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F5	fm	LR8555-45FRA	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F5	fm	LR8555-45FRB	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F5	fp	BL8555-25FQ	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F5	fp	BL8555-25FRA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F5	fp	BL8555-25FRB	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F5	fp	LR8555-25FQ	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F5	fp	LR8555-25FRA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F5	fp	LR8555-25FRB	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F50	-	R1224N502F	DC-DC-IC	PWM/VFM step-down, 5V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
F50	-	RP173N501D	LVR-IC	LDO, 5.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F50	eb	XC6367F502MR	DC-DC-IC	PWM step-up, 5.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F51	-	RP173N511D	LVR-IC	LDO, 5.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F51	eb	XC6367F512MR	DC-DC-IC	PWM step-up, 5.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F52	-	RP173N521D	LVR-IC	LDO, 5.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F52	eb	XC6367F522MR	DC-DC-IC	PWM step-up, 5.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F53	-	RP173N531D	LVR-IC	LDO, 5.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F53	-	TC53C5502ECT	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
F53	eb	XC6367F532MR	DC-DC-IC	PWM step-up, 5.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F54	-	RP173N541D	LVR-IC	LDO, 5.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F54	eb	XC6367F542MR	DC-DC-IC	PWM step-up, 5.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F55	-	R1224N552F	DC-DC-IC	PWM/VFM step-down, 5.5V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
F55	-	RP173N551D	LVR-IC	LDO, 5.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
F55	eb	XC6367F552MR	DC-DC-IC	PWM step-up, 5.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F56	eb	XC6367F562MR	DC-DC-IC	PWM step-up, 5.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F57	eb	XC6367F572MR	DC-DC-IC	PWM step-up, 5.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F58	eb	XC6367F582MR	DC-DC-IC	PWM step-up, 5.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F59	eb	XC6367F592MR	DC-DC-IC	PWM step-up, 5.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F5A	eb	XC6367F503MR	DC-DC-IC	PWM step-up, 5.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F5B	eb	XC6367F513MR	DC-DC-IC	PWM step-up, 5.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F5C	eb	XC6367F523MR	DC-DC-IC	PWM step-up, 5.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F5D	eb	XC6367F533MR	DC-DC-IC	PWM step-up, 5.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F5E	eb	XC6367F543MR	DC-DC-IC	PWM step-up, 5.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F5F	eb	XC6367F553MR	DC-DC-IC	PWM step-up, 5.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F5H	eb	XC6367F563MR	DC-DC-IC	PWM step-up, 5.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F5K	eb	XC6367F573MR	DC-DC-IC	PWM step-up, 5.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F5L	eb	XC6367F583MR	DC-DC-IC	PWM step-up, 5.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F5M	eb	XC6367F593MR	DC-DC-IC	PWM step-up, 5.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
f6	-	BD45E452G-M	Vdet-IC	4.5V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
F6	-	BL8555-16FQ	LVR-IC	LDO, 1.6V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F6	-	BL8555-16FRA	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F6	-	BL8555-16FRB	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F6	-	BU20TD3WG	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
F6	-	ELM7SHU04MB	CMOS-Log	Unbuffered Inverter	SOT-25	28	Log6	6g	Elm
F6	-	ELM7SHU04TB	CMOS-Log	Unbuffered Inverter	SC-88A	28	Log6	6g	Elm
F6	-	ELM89262B	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
F6	-	LR8555-16FQ	LVR-IC	LDO, 1.6V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F6	-	LR8555-16FRA	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F6	-	LR8555-16FRB	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F6	-	R1111N261B	LVR-IC	LDO, Low noise, 2.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F6	-	Si91844DT-18	LVR-IC	LDO, LN, 1.8V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
F6	ea	BL8555-16RQ	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F6	ea	BL8555-16RRA	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F6	ea	BL8555-16RRB	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F6	ea	LR8555-16RQ	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F6	ea	LR8555-16RRA	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F6	ea	LR8555-16RRB	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F6	ea	RN5VD56AA	Vdet-IC	5.6V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
F6	eu	BL8555-26RQ	LVR-IC	LDO, 2.6V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F6	eu	BL8555-26RRA	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F6	eu	BL8555-26RRB	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F6	eu	LR8555-26RQ	LVR-IC	LDO, 2.6V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F6	eu	LR8555-26RRA	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F6	eu	LR8555-26RRB	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F6	fg	BL8555-36RQ	LVR-IC	LDO, 3.6V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F6	fg	BL8555-36RRA	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F6	fg	BL8555-36RRB	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F6	fg	LR8555-36RQ	LVR-IC	LDO, 3.6V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F6	fg	LR8555-36RRA	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F6	fg	LR8555-36RRB	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F6	fh	BL8555-46RQ	LVR-IC	LDO, 4.6V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F6	fh	BL8555-46RRA	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F6	fh	BL8555-46RRB	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F6	fh	LR8555-46RQ	LVR-IC	LDO, 4.6V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F6	fh	LR8555-46RRA	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F6	fh	LR8555-46RRB	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F6	fk	BL8555-36FQ	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F6	fk	BL8555-36FRA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F6	fk	BL8555-36FRB	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F6	fk	LR8555-36FQ	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F6	fk	LR8555-36FRA	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F6	fk	LR8555-36FRB	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F6	fm	BL8555-46FQ	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F6	fm	BL8555-46FRA	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F6	fm	BL8555-46FRB	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F6	fm	LR8555-46FQ	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F6	fm	LR8555-46FRA	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F6	fm	LR8555-46FRB	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F6	fp	BL8555-26FQ	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F6	fp	BL8555-26FRA	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F6	fp	BL8555-26FRB	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F6	fp	LR8555-26FQ	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F6	fp	LR8555-26FRA	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F6	fp	LR8555-26FRB	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F60	-	R1224N602F	DC-DC-IC	PWM/VFM step-down, 6V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
F60	eb	XC6367F602MR	DC-DC-IC	PWM step-up, 6.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F61	eb	XC6367F612MR	DC-DC-IC	PWM step-up, 6.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F62	eb	XC6367F622MR	DC-DC-IC	PWM step-up, 6.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F63	-	TC53C5602ECT	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
F63	eb	XC6367F632MR	DC-DC-IC	PWM step-up, 6.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F64	eb	XC6367F642MR	DC-DC-IC	PWM step-up, 6.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F65	eb	XC6367F652MR	DC-DC-IC	PWM step-up, 6.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F6A	eb	XC6367F603MR	DC-DC-IC	PWM step-up, 6.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F6B	eb	XC6367F613MR	DC-DC-IC	PWM step-up, 6.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F6C	eb	XC6367F623MR	DC-DC-IC	PWM step-up, 6.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F6D	eb	XC6367F633MR	DC-DC-IC	PWM step-up, 6.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F6E	eb	XC6367F643MR	DC-DC-IC	PWM step-up, 6.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
F6F	eb	XC6367F653MR	DC-DC-IC	PWM step-up, 6.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
f7	-	BD45E462G-M	Vdet-IC	4.6V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
F7	-	BL8555-17FQ	LVR-IC	LDO, 1.7V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F7	-	BL8555-17FRA	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F7	-	BL8555-17FRB	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F7	-	BU21TD3WG	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
F7	-	ELM89272B	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
F7	-	LR8555-17FQ	LVR-IC	LDO, 1.7V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F7	-	LR8555-17FRA	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F7	-	LR8555-17FRB	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F7	-	R1111N271B	LVR-IC	LDO, Low noise, 2.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F7	-	Si91844DT-20	LVR-IC	LDO, LN, 2.0V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
F7	ea	BL8555-17RQ	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F7	ea	BL8555-17RRA	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F7	ea	BL8555-17RRB	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F7	ea	LR8555-17RQ	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F7	ea	LR8555-17RRA	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F7	ea	LR8555-17RRB	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F7	ea	RN5VD57AA	Vdet-IC	5.7V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
F7	eu	BL8555-27RQ	LVR-IC	LDO, 2.7V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F7	eu	BL8555-27RRA	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F7	eu	BL8555-27RRB	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F7	eu	LR8555-27RQ	LVR-IC	LDO, 2.7V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F7	eu	LR8555-27RRA	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F7	eu	LR8555-27RRB	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F7	fg	BL8555-37RQ	LVR-IC	LDO, 3.7V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F7	fg	BL8555-37RRA	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F7	fg	BL8555-37RRB	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F7	fg	LR8555-37RQ	LVR-IC	LDO, 3.7V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F7	fg	LR8555-37RRA	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F7	fg	LR8555-37RRB	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F7	fh	BL8555-47RQ	LVR-IC	LDO, 4.7V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F7	fh	BL8555-47RRA	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F7	fh	BL8555-47RRB	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F7	fh	LR8555-47RQ	LVR-IC	LDO, 4.7V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F7	fh	LR8555-47RRA	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F7	fh	LR8555-47RRB	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F7	fk	BL8555-37FQ	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F7	fk	BL8555-37FRA	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F7	fk	BL8555-37FRB	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F7	fk	LR8555-37FQ	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F7	fk	LR8555-37FRA	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F7	fk	LR8555-37FRB	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F7	fm	BL8555-47FQ	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F7	fm	BL8555-47FRA	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F7	fm	BL8555-47FRB	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F7	fm	LR8555-47FQ	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F7	fm	LR8555-47FRA	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F7	fm	LR8555-47FRB	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F7	fp	BL8555-27FQ	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F7	fp	BL8555-27FRA	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F7	fp	BL8555-27FRB	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F7	fp	LR8555-27FQ	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F7	fp	LR8555-27FRA	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F7	fp	LR8555-27FRB	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F73	-	TC53C5702ECT	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
f8	-	BD45E472G-M	Vdet-IC	4.7V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
F8	-	BL8555-18FQ	LVR-IC	LDO, 1.8V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F8	-	BL8555-18FRA	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F8	-	BL8555-18FRB	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F8	-	BU25TD3WG	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
F8	-	ELM7SH86MB	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-25	28	Log5	6g	Elm
F8	-	ELM7SH86TB	CMOS-Log	2-input EXCLUSIVE-OR gate	SC-88A	28	Log5	6g	Elm
F8	-	ELM89282B	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
F8	-	HD74HCT1G86CM	CMOS-Log	2-input EXCLUSIVE-OR gate	CMPAK-5	28	Log5	6a	Ren
F8	-	LR8555-18FQ	LVR-IC	LDO, 1.8V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F8	-	LR8555-18FRA	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F8	-	LR8555-18FRB	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F8	-	MC78PC28N	LVR-IC	LDO, LN, +CE, 2.8V±2.5%, 100mA	SOT-23-5	28cx	VR4	6b	Ons
F8	-	R1111N281B	LVR-IC	LDO, Low noise, 2.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F8	-	Si91844DT-22	LVR-IC	LDO, LN, 2.2V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
F8	ea	BL8555-18RQ	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F8	ea	BL8555-18RRA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F8	ea	BL8555-18RRB	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F8	ea	LR8555-18RQ	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F8	ea	LR8555-18RRA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F8	ea	LR8555-18RRB	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F8	ea	RN5VD58AA	Vdet-IC	5.8V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
F8	eu	BL8555-28RQ	LVR-IC	LDO, 2.8V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F8	eu	BL8555-28RRA	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F8	eu	BL8555-28RRB	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F8	eu	LR8555-28RQ	LVR-IC	LDO, 2.8V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F8	eu	LR8555-28RRA	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F8	eu	LR8555-28RRB	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F8	fg	BL8555-38RQ	LVR-IC	LDO, 3.8V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F8	fg	BL8555-38RRA	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F8	fg	BL8555-38RRB	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F8	fg	LR8555-38RQ	LVR-IC	LDO, 3.8V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F8	fg	LR8555-38RRA	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F8	fg	LR8555-38RRB	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F8	fh	BL8555-48RQ	LVR-IC	LDO, 4.8V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F8	fh	BL8555-48RRA	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F8	fh	BL8555-48RRB	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F8	fh	LR8555-48RQ	LVR-IC	LDO, 4.8V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F8	fh	LR8555-48RRA	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F8	fh	LR8555-48RRB	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F8	fk	BL8555-38FQ	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F8	fk	BL8555-38FRA	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F8	fk	BL8555-38FRB	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F8	fk	LR8555-38FQ	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F8	fk	LR8555-38FRA	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F8	fk	LR8555-38FRB	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F8	fm	BL8555-48FQ	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F8	fm	BL8555-48FRA	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F8	fm	BL8555-48FRB	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F8	fm	LR8555-48FQ	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F8	fm	LR8555-48FRA	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F8	fm	LR8555-48FRB	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F8	fp	BL8555-28FQ	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F8	fp	BL8555-28FRA	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F8	fp	BL8555-28FRB	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F8	fp	LR8555-28FQ	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F8	fp	LR8555-28FRA	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F8	fp	LR8555-28FRB	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F83	-	TC53C5802ECT	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
f86	-	XC7SH86GV	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT753	28	Log5	6a	Nxp
f9	-	BD45E482G-M	Vdet-IC	4.8V±1%, -MR, -Reset ODO, Td=200ms	SSOP-5	28vdp	VD4	6c	Rhm
F9	-	BL8555-19FQ	LVR-IC	LDO, 1.9V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F9	-	BL8555-19FRA	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F9	-	BL8555-19FRB	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F9	-	BU26TD3WG	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
F9	-	ELM7SH66MB	CMOS-Log	Single-pole single-throw analog switch	SOT-25	28	Log16	6g	Elm
F9	-	ELM7SH66TB	CMOS-Log	Single-pole single-throw analog switch	SC-88A	28	Log16	6g	Elm
F9	-	ELM89292B	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
F9	-	HD74HCT1G66CM	CMOS-Log	Single-pole single-throw analog switch	CMPAK-5	28	Log16	6a	Ren
F9	-	LR8555-19FQ	LVR-IC	LDO, 1.9V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F9	-	LR8555-19FRA	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F9	-	LR8555-19FRB	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F9	-	R1111N291B	LVR-IC	LDO, Low noise, 2.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
F9	-	Si91844DT-25	LVR-IC	LDO, LN, 2.5V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
F9	ea	BL8555-19RQ	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F9	ea	BL8555-19RRA	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F9	ea	BL8555-19RRB	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F9	ea	LR8555-19RQ	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F9	ea	LR8555-19RRA	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F9	ea	LR8555-19RRB	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F9	ea	RN5VD59AA	Vdet-IC	5.9V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
F9	eu	BL8555-29RQ	LVR-IC	LDO, 2.9V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F9	eu	BL8555-29RRA	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F9	eu	BL8555-29RRB	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F9	eu	LR8555-29RQ	LVR-IC	LDO, 2.9V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F9	eu	LR8555-29RRA	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F9	eu	LR8555-29RRB	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F9	fg	BL8555-39RQ	LVR-IC	LDO, 3.9V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F9	fg	BL8555-39RRA	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F9	fg	BL8555-39RRB	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F9	fg	LR8555-39RQ	LVR-IC	LDO, 3.9V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F9	fg	LR8555-39RRA	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F9	fg	LR8555-39RRB	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F9	fh	BL8555-49RQ	LVR-IC	LDO, 4.9V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Shb
F9	fh	BL8555-49RRA	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Shb
F9	fh	BL8555-49RRB	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Shb
F9	fh	LR8555-49RQ	LVR-IC	LDO, 4.9V±2%, 300mA	SC-70-5	28ym	VR1	6kd	Lrc
F9	fh	LR8555-49RRA	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-23-5	28ym	VR1	6kd	Lrc
F9	fh	LR8555-49RRB	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-23-5	28c5	VR1	6kc	Lrc
F9	fk	BL8555-39FQ	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F9	fk	BL8555-39FRA	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F9	fk	BL8555-39FRB	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F9	fk	LR8555-39FQ	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F9	fk	LR8555-39FRA	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F9	fk	LR8555-39FRB	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F9	fm	BL8555-49FQ	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F9	fm	BL8555-49FRA	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F9	fm	BL8555-49FRB	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F9	fm	LR8555-49FQ	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F9	fm	LR8555-49FRA	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F9	fm	LR8555-49FRB	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F9	fp	BL8555-29FQ	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
F9	fp	BL8555-29FRA	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
F9	fp	BL8555-29FRB	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
F9	fp	LR8555-29FQ	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
F9	fp	LR8555-29FRA	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
F9	fp	LR8555-29FRB	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
F93	-	TC53C5902ECT	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
Fa	-	BD49E55G	Vdet-IC	5.5V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FA	-	µPA505T	n/p-MOSFET	Dual, 50V, 100mA, 300mW, <19 Ω(10mA), 17/68ns	SOT-23-5	28fb	T21	6a	Nec
FA	-	74AUC1G00GW	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6a	Nxp
FA	-	ELM7SH14MB	CMOS-Log	Inverting Schmitt-trigger	SOT-25	28	Log7	6g	Elm
FA	-	ELM7SH14TB	CMOS-Log	Inverting Schmitt-trigger	SC-88A	28	Log7	6g	Elm
FA	-	HD74HCT1G14CM	CMOS-Log	Inverting Schmitt-trigger	CMPAK-5	28	Log7	6a	Ren
FA-	-	XC62GR5012M	LVR-IC	5.0V±2%, 150mA, +CE	SOT-25	28ew	VR4	6g	Tor
FA-	eh	XC62GP5012M	LVR-IC	5.0V±2%, 150mA, -CE	SOT-25	28ew	VR4	6g	Tor
FA+	-	XC62GR5022M	LVR-IC	5.0V±2%, 150mA, +CE, HS response	SOT-25	28ew	VR4	6g	Tor
FA+	eh	XC62GP5022M	LVR-IC	5.0V±2%, 150mA, -CE, HS response	SOT-25	28ew	VR4	6g	Tor
FA0	-	XC6225A362MR-G	LVR-IC	LDO, 3.6V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FA0	ej	XC6122D330MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FA0	fe	XC6122C730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FA1	-	XC6225A372MR-G	LVR-IC	LDO, 3.7V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FA1	ej	XC6122D331MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FA1	fe	XC6122C731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FA2	-	XC6225A382MR-G	LVR-IC	LDO, 3.8V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FA2	ej	XC6122D332MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FA2	fe	XC6122C732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FA3	-	XC6225A392MR-G	LVR-IC	LDO, 3.9V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FA3	ej	XC6122D333MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FA3	fe	XC6122C733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FA4	-	XC6225A402MR-G	LVR-IC	LDO, 4.0V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FA4	ej	XC6122D334MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FA4	fe	XC6122C734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FA5	-	XC6225A412MR-G	LVR-IC	LDO, 4.1V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FA5	ej	XC6122D335MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FA5	fe	XC6122C735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FA6	-	XC6225A422MR-G	LVR-IC	LDO, 4.2V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FA6	ej	XC6122D336MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FA6	fe	XC6122C736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FA7	-	XC6225A432MR-G	LVR-IC	LDO, 4.3V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FA7	ej	XC6122D337MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FA7	fe	XC6122C737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FA8	-	XC6225A442MR-G	LVR-IC	LDO, 4.4V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FA8	ej	XC6122D338MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FA8	fe	XC6122C738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FA9	-	XC6225A452MR-G	LVR-IC	LDO, 4.5V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FA9	ej	XC6122D339MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FA9	fe	XC6122C739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAA	-	RP170N121B	LVR-IC	LDO, 1.2V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAA	-	XC6225A462MR-G	LVR-IC	LDO, 4.6V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FAA	ej	XC6122D340MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAA	fe	XC6122C740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAB	-	RP170N121B5	LVR-IC	LDO, 1.25V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAB	-	XC6225A472MR-G	LVR-IC	LDO, 4.7V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FAB	ej	XC6122D341MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAB	fe	XC6122C741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAC	-	RP170N131B	LVR-IC	LDO, 1.3V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAC	-	XC6225A482MR-G	LVR-IC	LDO, 4.8V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FAC	ej	XC6122D342MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAC	fe	XC6122C742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAD	-	RP170N141B	LVR-IC	LDO, 1.4V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAD	-	XC6225A492MR-G	LVR-IC	LDO, 4.9V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FAD	ej	XC6122D343MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAD	fe	XC6122C743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAE	-	RP170N151B	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAE	-	XC6225A502MR-G	LVR-IC	LDO, 5.0V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FAE	ej	XC6122D344MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAE	fe	XC6122C744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAF	-	RP170N161B	LVR-IC	LDO, 1.6V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAF	ej	XC6122D345MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAF	fe	XC6122C745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAG	-	RP170N171B	LVR-IC	LDO, 1.7V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAH	-	RP170N181B	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAH	ec	XC6122D316MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAH	ej	XC6122D346MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAH	em	XC6122C716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAH	fe	XC6122C746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAJ	-	RP170N181B5	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAK	-	RP170N191B	LVR-IC	LDO, 1.9V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FAK	ec	XC6122D317MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAK	ej	XC6122D347MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAK	em	XC6122C717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAK	fe	XC6122C747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAL	-	RP170N201B	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAL	ec	XC6122D318MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAL	ej	XC6122D348MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAL	em	XC6122C718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAL	fe	XC6122C748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAM	-	RP170N211B	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAM	ec	XC6122D319MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAM	ej	XC6122D349MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAM	em	XC6122C719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAM	fe	XC6122C749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAN	-	PAM8101AAB	Lin-IC	AF PA, BTL, class-D, 2.5..6V, 1W(5V/8Ω)	SOT-25	28	AFP1	6a	Pam
FAN	-	RP170N221B	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAN	ec	XC6122D320MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAN	ej	XC6122D350MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAN	em	XC6122C720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAN	fe	XC6122C750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAP	-	RP170N231B	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAP	ec	XC6122D321MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAP	em	XC6122C721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAQ	-	RP170N241B	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAR	-	RP170N251B	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAR	ec	XC6122D322MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAR	em	XC6122C722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAS	-	RP170N261B	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAS	ec	XC6122D323MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAS	em	XC6122C723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAT	-	RP170N271B	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAT	ec	XC6122D324MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAT	em	XC6122C724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAU	ec	XC6122D325MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAU	em	XC6122C725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAV	-	RP170N281B5	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAV	ec	XC6122D326MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAV	em	XC6122C726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAW	-	RP170N291B	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAX	-	RP170N301B	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAX	ec	XC6122D327MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAX	em	XC6122C727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAY	-	RP170N281B	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAY	-	RP170N311B	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAY	ec	XC6122D328MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAY	em	XC6122C728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FAZ	-	RP170N321B	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FAZ	ec	XC6122D329MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FAZ	em	XC6122C729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
fB	-	XC7SH02GW	CMOS-Log	2-input NOR gate	SOT-353-1	28	Log2	6a	Nxp
Fb	-	BD49E56G	Vdet-IC	5.6V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FB	-	74AUC1G02GW	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6a	Nxp
FB0	-	XC6225B362MR-G	LVR-IC	LDO, 3.6V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FB0	ej	XC6122D530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FB0	fe	XC6122C630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FB1	-	XC6225B372MR-G	LVR-IC	LDO, 3.7V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FB1	ej	XC6122D531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FB1	fe	XC6122C631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FB2	-	XC6225B382MR-G	LVR-IC	LDO, 3.8V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FB2	ej	XC6122D532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FB2	fe	XC6122C632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FB3	-	XC6225B392MR-G	LVR-IC	LDO, 3.9V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FB3	ej	XC6122D533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FB3	fe	XC6122C633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FB4	-	XC6225B402MR-G	LVR-IC	LDO, 4.0V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FB4	ej	XC6122D534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FB4	fe	XC6122C634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FB5	-	XC6225B412MR-G	LVR-IC	LDO, 4.1V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FB5	eb	XC6367F151MR	DC-DC-IC	PWM step-up, 1.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FB5	ej	XC6122D535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FB5	fe	XC6122C635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FB6	-	XC6225B422MR-G	LVR-IC	LDO, 4.2V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FB6	eb	XC6367F161MR	DC-DC-IC	PWM step-up, 1.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FB6	ej	XC6122D536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FB6	fe	XC6122C636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FB7	-	XC6225B432MR-G	LVR-IC	LDO, 4.3V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FB7	eb	XC6367F171MR	DC-DC-IC	PWM step-up, 1.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FB7	ej	XC6122D537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FB7	fe	XC6122C637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FB8	-	XC6225B442MR-G	LVR-IC	LDO, 4.4V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FB8	eb	XC6367F181MR	DC-DC-IC	PWM step-up, 1.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FB8	ej	XC6122D538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FB8	fe	XC6122C638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FB9	-	XC6225B452MR-G	LVR-IC	LDO, 4.5V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FB9	eb	XC6367F191MR	DC-DC-IC	PWM step-up, 1.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FB9	ej	XC6122D539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FB9	fe	XC6122C639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBA	-	RP170N121D	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBA	-	XC6225B462MR-G	LVR-IC	LDO, 4.6V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FBA	-	XC9133B02AMR	LDR-IC	PWM step-up, Adj. 2.5...17.5V/LED backlight driver	SOT-25	28sq	LD3	6g	Tor
FBA	ej	XC6122D540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBA	fe	XC6122C640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBB	-	RP170N121D5	LVR-IC	LDO, 1.25V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBB	-	XC6225B472MR-G	LVR-IC	LDO, 4.7V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FBB	ej	XC6122D541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBB	fe	XC6122C641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBC	-	RP170N131D	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBC	-	XC6225B482MR-G	LVR-IC	LDO, 4.8V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FBC	ej	XC6122D542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBC	fe	XC6122C642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBD	-	RP170N141D	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBD	-	XC6225B492MR-G	LVR-IC	LDO, 4.9V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FBD	ej	XC6122D543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBD	fe	XC6122C643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBE	-	RP170N151D	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBE	-	XC6225B502MR-G	LVR-IC	LDO, 5.0V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FBE	ej	XC6122D544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBE	fe	XC6122C644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBF	-	RP170N161D	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBF	eb	XC6367F155MR	DC-DC-IC	PWM step-up, 1.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FBF	ej	XC6122D545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBF	fe	XC6122C645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBG	-	RP170N171D	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBH	-	RP170N181D	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBH	eb	XC6367F165MR	DC-DC-IC	PWM step-up, 1.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FBH	ec	XC6122D516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBH	ej	XC6122D546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBH	em	XC6122C616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBH	fe	XC6122C646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBJ	-	RP170N181D5	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBK	-	RP170N191D	LVR-IC	LDO, 1.9V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBK	eb	XC6367F175MR	DC-DC-IC	PWM step-up, 1.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FBK	ec	XC6122D517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBK	ej	XC6122D547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBK	em	XC6122C617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBK	fe	XC6122C647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBL	-	RP170N201D	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBL	eb	XC6367F185MR	DC-DC-IC	PWM step-up, 1.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FBL	ec	XC6122D518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBL	ej	XC6122D548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBL	em	XC6122C618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBL	fe	XC6122C648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBM	-	RP170N211D	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBM	eb	XC6367F195MR	DC-DC-IC	PWM step-up, 1.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FBM	ec	XC6122D519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBM	ej	XC6122D549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBM	em	XC6122C619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBM	fe	XC6122C649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBN	-	RP170N221D	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBN	ec	XC6122D520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FBN	ej	XC6122D550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBN	em	XC6122C620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBN	fe	XC6122C650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBP	-	RP170N231D	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBP	ec	XC6122D521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBP	em	XC6122C621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBQ	-	RP170N241D	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBR	-	RP170N251D	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBR	ec	XC6122D522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBR	em	XC6122C622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBS	-	RP170N261D	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBS	ec	XC6122D523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBS	em	XC6122C623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBT	-	RP170N271D	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBT	ec	XC6122D524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBT	em	XC6122C624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBU	ec	XC6122D525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBU	em	XC6122C625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBV	-	RP170N281D5	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBV	ec	XC6122D526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBV	em	XC6122C626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBX	ec	XC6122D527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBX	em	XC6122C627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBY	-	RP170N281D	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBY	-	RP170N311D	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBY	ec	XC6122D528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBY	em	XC6122C628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FBZ	-	RP170N321D	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
FBZ	ec	XC6122D529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FBZ	em	XC6122C629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
fC	-	XC7SH04GW	CMOS-Log	Inverter	SOT-353-1	28	Log6	6a	Nxp
Fc	-	BD49E57G	Vdet-IC	5.7V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FC	-	74AUC1G04GW	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Nxp
FC0	eb	XC6367F201MR	DC-DC-IC	PWM step-up, 2.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FC0	ej	XC6122D630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC0	fe	XC6122D430MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC1	eb	XC6367F211MR	DC-DC-IC	PWM step-up, 2.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FC1	ej	XC6122D631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC1	fe	XC6122D431MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC2	eb	XC6367F221MR	DC-DC-IC	PWM step-up, 2.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FC2	ej	XC6122D632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC2	fe	XC6122D432MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC3	eb	XC6367F231MR	DC-DC-IC	PWM step-up, 2.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FC3	ej	XC6122D633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC3	fe	XC6122D433MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC4	eb	XC6367F241MR	DC-DC-IC	PWM step-up, 2.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FC4	ej	XC6122D634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC4	fe	XC6122D434MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC5	eb	XC6367F251MR	DC-DC-IC	PWM step-up, 2.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FC5	ej	XC6122D635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC5	fe	XC6122D435MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC6	eb	XC6367F261MR	DC-DC-IC	PWM step-up, 2.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FC6	ej	XC6122D636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC6	fe	XC6122D436MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC7	eb	XC6367F271MR	DC-DC-IC	PWM step-up, 2.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FC7	ej	XC6122D637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC7	fe	XC6122D437MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC8	eb	XC6367F281MR	DC-DC-IC	PWM step-up, 2.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FC8	ej	XC6122D638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC8	fe	XC6122D438MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC9	eb	XC6367F291MR	DC-DC-IC	PWM step-up, 2.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FC9	ej	XC6122D639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FC9	fe	XC6122D439MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCA	eb	XC6367F205MR	DC-DC-IC	PWM step-up, 2.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FCA	ej	XC6122D640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCA	fe	XC6122D440MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCB	eb	XC6367F215MR	DC-DC-IC	PWM step-up, 2.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FCB	ej	XC6122D641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCB	fe	XC6122D441MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCC	eb	XC6367F225MR	DC-DC-IC	PWM step-up, 2.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FCC	ej	XC6122D642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCC	fe	XC6122D442MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCD	eb	XC6367F235MR	DC-DC-IC	PWM step-up, 2.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FCD	ej	XC6122D643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCD	fe	XC6122D443MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCE	eb	XC6367F245MR	DC-DC-IC	PWM step-up, 2.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FCE	ej	XC6122D644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCE	fe	XC6122D444MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCF	eb	XC6367F255MR	DC-DC-IC	PWM step-up, 2.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FCF	ej	XC6122D645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCF	fe	XC6122D445MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCH	eb	XC6367F265MR	DC-DC-IC	PWM step-up, 2.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FCH	ec	XC6122D616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCH	ej	XC6122D646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCH	em	XC6122D416MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCH	fe	XC6122D446MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCK	eb	XC6367F275MR	DC-DC-IC	PWM step-up, 2.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FCK	ec	XC6122D617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCK	ej	XC6122D647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCK	em	XC6122D417MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCK	fe	XC6122D447MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCL	eb	XC6367F285MR	DC-DC-IC	PWM step-up, 2.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FCL	ec	XC6122D618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCL	ej	XC6122D648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCL	em	XC6122D418MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCL	fe	XC6122D448MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCM	eb	XC6367F295MR	DC-DC-IC	PWM step-up, 2.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FCM	ec	XC6122D619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCM	ej	XC6122D649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCM	em	XC6122D419MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCM	fe	XC6122D449MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCN	ec	XC6122D620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCN	ej	XC6122D650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCN	em	XC6122D420MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCN	fe	XC6122D450MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCP	ec	XC6122D621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCP	em	XC6122D421MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCR	ec	XC6122D622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCR	em	XC6122D422MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCS	ec	XC6122D623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCS	em	XC6122D423MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCT	ec	XC6122D624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCT	em	XC6122D424MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCU	ec	XC6122D625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCU	em	XC6122D425MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCV	ec	XC6122D626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCV	em	XC6122D426MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCX	ec	XC6122D627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCX	em	XC6122D427MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCY	ec	XC6122D628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCY	em	XC6122D428MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCZ	ec	XC6122D629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FCZ	em	XC6122D429MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
fD	-	XC7SHU04GW	CMOS-Log	Inverter	SOT-353-1	28	Log6	6a	Nxp
Fd	-	BD49E58G	Vdet-IC	5.8V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FD	-	BD4923FVE	Vdet-IC	2.3V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
FD	-	BD4923G	Vdet-IC	2.3V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FD0	eb	XC6367F301MR	DC-DC-IC	PWM step-up, 3.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FD0	ej	XC6122E430MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FD0	fe	XC6122D730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FD1	eb	XC6367F311MR	DC-DC-IC	PWM step-up, 3.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FD1	ej	XC6122E431MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FD1	fe	XC6122D731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FD11G	-	AIC1747-11GK5	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD11P	-	AIC1747-11PK5	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD12G	-	AIC1747-12GK5	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD12P	-	AIC1747-12PK5	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD13G	-	AIC1747-13GK5	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD13P	-	AIC1747-13PK5	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD15G	-	AIC1747-15GK5	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FD15P	-	AIC1747-15PK5	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD18G	-	AIC1747-18GK5	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD18P	-	AIC1747-18PK5	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD2	eb	XC6367F321MR	DC-DC-IC	PWM step-up, 3.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FD2	ej	XC6122E432MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FD2	fe	XC6122D732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FD20G	-	AIC1747-20GK5	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD20P	-	AIC1747-20PK5	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD25G	-	AIC1747-25GK5	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD25P	-	AIC1747-25PK5	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD27G	-	AIC1747-27GK5	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD27P	-	AIC1747-27PK5	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD2JG	-	AIC1747-285GK5	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD2JP	-	AIC1747-285PK5	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD3	eb	XC6367F331MR	DC-DC-IC	PWM step-up, 3.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FD3	ej	XC6122E433MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FD3	fe	XC6122D733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FD30G	-	AIC1747-30GK5	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD30P	-	AIC1747-30PK5	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD33G	-	AIC1747-33GK5	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD33P	-	AIC1747-33PK5	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD35G	-	AIC1747-35GK5	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD35P	-	AIC1747-35PK5	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD37G	-	AIC1747-37GK5	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD37P	-	AIC1747-37PK5	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD38G	-	AIC1747-38GK5	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD38P	-	AIC1747-38PK5	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FD4	eb	XC6367F341MR	DC-DC-IC	PWM step-up, 3.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FD4	ej	XC6122E434MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FD4	fe	XC6122D734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FD5	eb	XC6367F351MR	DC-DC-IC	PWM step-up, 3.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FD5	ej	XC6122E435MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FD5	fe	XC6122D735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FD6	eb	XC6367F361MR	DC-DC-IC	PWM step-up, 3.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FD6	ej	XC6122E436MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FD6	fe	XC6122D736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FD7	eb	XC6367F371MR	DC-DC-IC	PWM step-up, 3.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FD7	ej	XC6122E437MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FD7	fe	XC6122D737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FD8	eb	XC6367F381MR	DC-DC-IC	PWM step-up, 3.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FD8	ej	XC6122E438MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FD8	fe	XC6122D738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FD9	eb	XC6367F391MR	DC-DC-IC	PWM step-up, 3.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FD9	ej	XC6122E439MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FD9	fe	XC6122D739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDA	eb	XC6367F305MR	DC-DC-IC	PWM step-up, 3.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FDA	ej	XC6122E440MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDA	fe	XC6122D740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDB	eb	XC6367F315MR	DC-DC-IC	PWM step-up, 3.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FDB	ej	XC6122E441MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDB	fe	XC6122D741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDC	eb	XC6367F325MR	DC-DC-IC	PWM step-up, 3.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FDC	ej	XC6122E442MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDC	fe	XC6122D742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDD	eb	XC6367F335MR	DC-DC-IC	PWM step-up, 3.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FDD	ej	XC6122E443MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDD	fe	XC6122D743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDE	eb	XC6367F345MR	DC-DC-IC	PWM step-up, 3.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FDE	ej	XC6122E444MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDE	fe	XC6122D744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDF	eb	XC6367F355MR	DC-DC-IC	PWM step-up, 3.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FDF	ej	XC6122E445MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDF	fe	XC6122D745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDH	eb	XC6367F365MR	DC-DC-IC	PWM step-up, 3.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FDH	ec	XC6122E416MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDH	ej	XC6122E446MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDH	em	XC6122D716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDH	fe	XC6122D746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDK	eb	XC6367F375MR	DC-DC-IC	PWM step-up, 3.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FDK	ec	XC6122E417MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FDK	ej	XC6122E447MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDK	em	XC6122D717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDK	fe	XC6122D747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDL	eb	XC6367F385MR	DC-DC-IC	PWM step-up, 3.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FDL	ec	XC6122E418MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDL	ej	XC6122E448MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDL	em	XC6122D718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDL	fe	XC6122D748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDM	eb	XC6367F395MR	DC-DC-IC	PWM step-up, 3.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FDM	ec	XC6122E419MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDM	ej	XC6122E449MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDM	em	XC6122D719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDM	fe	XC6122D749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDN	ec	XC6122E420MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDN	ej	XC6122E450MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDN	em	XC6122D720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDN	fe	XC6122D750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDP	ec	XC6122E421MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDP	em	XC6122D721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDR	ec	XC6122E422MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDR	em	XC6122D722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDS	ec	XC6122E423MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDS	em	XC6122D723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDT	ec	XC6122E424MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDT	em	XC6122D724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDU	ec	XC6122E425MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDU	em	XC6122D725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDV	ec	XC6122E426MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDV	em	XC6122D726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDX	ec	XC6122E427MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDX	em	XC6122D727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDY	ec	XC6122E428MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDY	em	XC6122D728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
FDZ	ec	XC6122E429MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FDZ	em	XC6122D729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
fE	-	XC7SH08GW	CMOS-Log	2-input AND gate	SOT-353-1	28	Log3	6a	Nxp
Fe	-	BD49E59G	Vdet-IC	5.9V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FE	-	74AUC1G08GW	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Nxp
FE	-	BD4924FVE	Vdet-IC	2.4V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
FE	-	BD4924G	Vdet-IC	2.4V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FE0	eb	XC6367F401MR	DC-DC-IC	PWM step-up, 4.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FE0	ej	XC6122E530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FE1	eb	XC6367F411MR	DC-DC-IC	PWM step-up, 4.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FE1	ej	XC6122E531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FE2	-	XC6225A08AMR-G	LVR-IC	LDO, 0.85V±30mV, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FE2	eb	XC6367F421MR	DC-DC-IC	PWM step-up, 4.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FE2	ej	XC6122E532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FE3	-	XC6225A09AMR-G	LVR-IC	LDO, 0.95V±30mV, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FE3	eb	XC6367F431MR	DC-DC-IC	PWM step-up, 4.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FE3	ej	XC6122E533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FE4	-	XC6225A10AMR-G	LVR-IC	LDO, 1.05V±30mV, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FE4	eb	XC6367F441MR	DC-DC-IC	PWM step-up, 4.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FE4	ej	XC6122E534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FE5	-	XC6225A11AMR-G	LVR-IC	LDO, 1.15V±30mV, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FE5	eb	XC6367F451MR	DC-DC-IC	PWM step-up, 4.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FE5	ej	XC6122E535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FE6	-	XC6225A12AMR-G	LVR-IC	LDO, 1.25V±30mV, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FE6	eb	XC6367F461MR	DC-DC-IC	PWM step-up, 4.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FE6	ej	XC6122E536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FE7	-	XC6225A13AMR-G	LVR-IC	LDO, 1.35V±30mV, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FE7	eb	XC6367F471MR	DC-DC-IC	PWM step-up, 4.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FE7	ej	XC6122E537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FE8	-	XC6225A14AMR-G	LVR-IC	LDO, 1.45V±30mV, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FE8	eb	XC6367F481MR	DC-DC-IC	PWM step-up, 4.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FE8	ej	XC6122E538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FE9	-	XC6225A15AMR-G	LVR-IC	LDO, 1.55V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FE9	eb	XC6367F491MR	DC-DC-IC	PWM step-up, 4.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FE9	ej	XC6122E539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEA	-	XC6225A16AMR-G	LVR-IC	LDO, 1.65V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FEA	eb	XC6367F405MR	DC-DC-IC	PWM step-up, 4.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FEA	ej	XC6122E540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEB	-	XC6225A17AMR-G	LVR-IC	LDO, 1.75V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FEB	eb	XC6367F415MR	DC-DC-IC	PWM step-up, 4.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FEB	ej	XC6122E541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEC	-	XC6225A18AMR-G	LVR-IC	LDO, 1.85V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FEC	eb	XC6367F425MR	DC-DC-IC	PWM step-up, 4.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FEC	ej	XC6122E542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FED	-	XC6225A19AMR-G	LVR-IC	LDO, 1.95V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FED	eb	XC6367F435MR	DC-DC-IC	PWM step-up, 4.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FED	ej	XC6122E543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEE	-	XC6225A20AMR-G	LVR-IC	LDO, 2.05V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FEE	eb	XC6367F445MR	DC-DC-IC	PWM step-up, 4.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FEE	ej	XC6122E544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEF	-	XC6225A21AMR-G	LVR-IC	LDO, 2.15V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FEF	eb	XC6367F455MR	DC-DC-IC	PWM step-up, 4.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FEF	ej	XC6122E545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEH	-	XC6225A22AMR-G	LVR-IC	LDO, 2.25V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FEH	eb	XC6367F465MR	DC-DC-IC	PWM step-up, 4.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FEH	ec	XC6122E516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEH	ej	XC6122E546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEK	-	XC6225A23AMR-G	LVR-IC	LDO, 2.35V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FEK	eb	XC6367F475MR	DC-DC-IC	PWM step-up, 4.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FEK	ec	XC6122E517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEK	ej	XC6122E547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEL	-	XC6225A24AMR-G	LVR-IC	LDO, 2.45V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FEL	eb	XC6367F485MR	DC-DC-IC	PWM step-up, 4.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FEL	ec	XC6122E518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEL	ej	XC6122E548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEM	-	XC6225A25AMR-G	LVR-IC	LDO, 2.55V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FEM	eb	XC6367F495MR	DC-DC-IC	PWM step-up, 4.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FEM	ec	XC6122E519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEM	ej	XC6122E549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEN	-	XC6225A26AMR-G	LVR-IC	LDO, 2.65V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FEN	ec	XC6122E520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEN	ej	XC6122E550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEP	-	XC6225A27AMR-G	LVR-IC	LDO, 2.75V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FEP	ec	XC6122E521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FER	-	XC6225A28AMR-G	LVR-IC	LDO, 2.85V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FER	ec	XC6122E522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FES	-	XC6225A29AMR-G	LVR-IC	LDO, 2.95V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FES	ec	XC6122E523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FET	-	XC6225A30AMR-G	LVR-IC	LDO, 3.05V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FET	ec	XC6122E524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEU	-	XC6225A31AMR-G	LVR-IC	LDO, 3.15V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FEU	ec	XC6122E525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEV	-	XC6225A32AMR-G	LVR-IC	LDO, 3.25V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FEV	ec	XC6122E526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEX	-	XC6225A33AMR-G	LVR-IC	LDO, 3.35V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FEX	ec	XC6122E527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEY	-	XC6225A34AMR-G	LVR-IC	LDO, 3.45V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FEY	ec	XC6122E528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FEZ	-	XC6225A35AMR-G	LVR-IC	LDO, 3.55V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FEZ	ec	XC6122E529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
fF	-	XC7SH14GW	CMOS-Log	Inverting Schmitt-trigger	SOT-353-1	28	Log7	6a	Nxp
Ff	-	BD49E60G	Vdet-IC	6.0V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FF	-	BD4925FVE	Vdet-IC	2.5V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
FF	-	BD4925G	Vdet-IC	2.5V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FF0	eb	XC6367F501MR	DC-DC-IC	PWM step-up, 5.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FF0	ej	XC6122E630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FF1	eb	XC6367F511MR	DC-DC-IC	PWM step-up, 5.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FF1	ej	XC6122E631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FF11G	-	AIC1747-11GV5	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF11P	-	AIC1747-11PV5	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF12G	-	AIC1747-12GV5	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF12P	-	AIC1747-12PV5	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF13G	-	AIC1747-13GV5	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF13P	-	AIC1747-13PV5	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF15G	-	AIC1747-15GV5	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF15P	-	AIC1747-15PV5	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF18G	-	AIC1747-18GV5	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FF18P	-	AIC1747-18PV5	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF2	-	XC6225B08AMR-G	LVR-IC	LDO, 0.85V±30mV, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FF2	eb	XC6367F521MR	DC-DC-IC	PWM step-up, 5.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FF2	ej	XC6122E632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FF20G	-	AIC1747-20GV5	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF20P	-	AIC1747-20PV5	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF25G	-	AIC1747-25GV5	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF25P	-	AIC1747-25PV5	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF27G	-	AIC1747-27GV5	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF27P	-	AIC1747-27PV5	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF2JG	-	AIC1747-285GV5	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF2JP	-	AIC1747-285PV5	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF3	-	XC6225B09AMR-G	LVR-IC	LDO, 0.95V±30mV, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FF3	eb	XC6367F531MR	DC-DC-IC	PWM step-up, 5.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FF3	ej	XC6122E633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FF30G	-	AIC1747-30GV5	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF30P	-	AIC1747-30PV5	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF33G	-	AIC1747-33GV5	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF33P	-	AIC1747-33PV5	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF35G	-	AIC1747-35GV5	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF35P	-	AIC1747-35PV5	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF37G	-	AIC1747-37GV5	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF37P	-	AIC1747-37PV5	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF38G	-	AIC1747-38GV5	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF38P	-	AIC1747-38PV5	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FF4	-	XC6225B10AMR-G	LVR-IC	LDO, 1.05V±30mV, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FF4	eb	XC6367F541MR	DC-DC-IC	PWM step-up, 5.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FF4	ej	XC6122E634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FF5	-	XC6225B11AMR-G	LVR-IC	LDO, 1.15V±30mV, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FF5	eb	XC6367F551MR	DC-DC-IC	PWM step-up, 5.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FF5	ej	XC6122E635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FF6	-	XC6225B12AMR-G	LVR-IC	LDO, 1.25V±30mV, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FF6	eb	XC6367F561MR	DC-DC-IC	PWM step-up, 5.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FF6	ej	XC6122E636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FF7	-	XC6225B13AMR-G	LVR-IC	LDO, 1.35V±30mV, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FF7	eb	XC6367F571MR	DC-DC-IC	PWM step-up, 5.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FF7	ej	XC6122E637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FF8	-	XC6225B14AMR-G	LVR-IC	LDO, 1.45V±30mV, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FF8	eb	XC6367F581MR	DC-DC-IC	PWM step-up, 5.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FF8	ej	XC6122E638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FF9	-	XC6225B15AMR-G	LVR-IC	LDO, 1.55V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FF9	eb	XC6367F591MR	DC-DC-IC	PWM step-up, 5.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FF9	ej	XC6122E639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFA	-	XC6225B16AMR-G	LVR-IC	LDO, 1.65V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFA	eb	XC6367F505MR	DC-DC-IC	PWM step-up, 5.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FFA	ej	XC6122E640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFB	-	XC6225B17AMR-G	LVR-IC	LDO, 1.75V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFB	eb	XC6367F515MR	DC-DC-IC	PWM step-up, 5.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FFB	ej	XC6122E641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFC	-	XC6225B192MR-G	LVR-IC	LDO, 1.9V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFC	eb	XC6367F525MR	DC-DC-IC	PWM step-up, 5.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FFC	ej	XC6122E642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFD	-	XC6225B19AMR-G	LVR-IC	LDO, 1.95V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFD	eb	XC6367F535MR	DC-DC-IC	PWM step-up, 5.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FFD	ej	XC6122E643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFE	-	XC6225B20AMR-G	LVR-IC	LDO, 2.05V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFE	eb	XC6367F545MR	DC-DC-IC	PWM step-up, 5.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FFE	ej	XC6122E644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFF	-	XC6225B21AMR-G	LVR-IC	LDO, 2.15V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFF	eb	XC6367F555MR	DC-DC-IC	PWM step-up, 5.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FFF	ej	XC6122E645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFH	-	XC6225B22AMR-G	LVR-IC	LDO, 2.25V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFH	eb	XC6367F565MR	DC-DC-IC	PWM step-up, 5.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FFH	ec	XC6122E616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFH	ej	XC6122E646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFK	-	XC6225B23AMR-G	LVR-IC	LDO, 2.35V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFK	eb	XC6367F575MR	DC-DC-IC	PWM step-up, 5.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FFK	ec	XC6122E617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFK	ej	XC6122E647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFL	-	XC6225B24AMR-G	LVR-IC	LDO, 2.45V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FFL	eb	XC6367F585MR	DC-DC-IC	PWM step-up, 5.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FFL	ec	XC6122E618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFL	ej	XC6122E648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFM	-	XC6225B25AMR-G	LVR-IC	LDO, 2.55V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFM	eb	XC6367F595MR	DC-DC-IC	PWM step-up, 5.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FFM	ec	XC6122E619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFM	ej	XC6122E649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFN	-	XC6225B26AMR-G	LVR-IC	LDO, 2.65V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFN	ec	XC6122E620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFN	ej	XC6122E650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFP	-	XC6225B27AMR-G	LVR-IC	LDO, 2.75V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFP	ec	XC6122E621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFR	-	XC6225B28AMR-G	LVR-IC	LDO, 2.85V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFR	ec	XC6122E622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFS	-	XC6225B29AMR-G	LVR-IC	LDO, 2.95V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFS	ec	XC6122E623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFT	-	XC6225B30AMR-G	LVR-IC	LDO, 3.05V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFT	ec	XC6122E624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFU	-	XC6225B31AMR-G	LVR-IC	LDO, 3.15V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFU	ec	XC6122E625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFV	-	XC6225B32AMR-G	LVR-IC	LDO, 3.25V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFV	ec	XC6122E626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFX	-	XC6225B33AMR-G	LVR-IC	LDO, 3.35V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFX	ec	XC6122E627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFY	-	XC6225B34AMR-G	LVR-IC	LDO, 3.45V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFY	ec	XC6122E628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FFZ	-	XC6225B35AMR-G	LVR-IC	LDO, 3.55V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FFZ	ec	XC6122E629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
fG	-	XC7SH32GW	CMOS-Log	2-input OR gate	SOT-353-1	28	Log4	6a	Nxp
FG	-	74AUC1G32GW	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6a	Nxp
FG	-	BD4926FVE	Vdet-IC	2.6V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
FG	-	BD4926G	Vdet-IC	2.6V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
fH	-	XC7SH86GW	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353-1	28	Log5	6a	Nxp
FH	-	BD4927FVE	Vdet-IC	2.7V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
FH	-	BD4927G	Vdet-IC	2.7V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FH0	eb	XC6367F601MR	DC-DC-IC	PWM step-up, 6.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FH0	ej	XC6122E730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FH1	eb	XC6367F611MR	DC-DC-IC	PWM step-up, 6.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FH1	ej	XC6122E731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FH2	eb	XC6367F621MR	DC-DC-IC	PWM step-up, 6.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FH2	ej	XC6122E732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FH3	eb	XC6367F631MR	DC-DC-IC	PWM step-up, 6.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FH3	ej	XC6122E733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FH4	eb	XC6367F641MR	DC-DC-IC	PWM step-up, 6.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FH4	ej	XC6122E734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FH5	eb	XC6367F651MR	DC-DC-IC	PWM step-up, 6.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FH5	ej	XC6122E735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FH6	ej	XC6122E736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FH7	ej	XC6122E737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FH8	ej	XC6122E738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FH9	ej	XC6122E739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHA	eb	XC6367F605MR	DC-DC-IC	PWM step-up, 6.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FHA	ej	XC6122E740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHB	eb	XC6367F615MR	DC-DC-IC	PWM step-up, 6.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FHB	ej	XC6122E741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHC	eb	XC6367F625MR	DC-DC-IC	PWM step-up, 6.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FHC	ej	XC6122E742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHD	eb	XC6367F635MR	DC-DC-IC	PWM step-up, 6.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FHD	ej	XC6122E743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHE	eb	XC6367F645MR	DC-DC-IC	PWM step-up, 6.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FHE	ej	XC6122E744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHF	eb	XC6367F655MR	DC-DC-IC	PWM step-up, 6.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
FHF	ej	XC6122E745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHH	ec	XC6122E716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHH	ej	XC6122E746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHK	ec	XC6122E717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHK	ej	XC6122E747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHL	ec	XC6122E718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHL	ej	XC6122E748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHM	ec	XC6122E719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FHM	ej	XC6122E749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHN	ec	XC6122E720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHN	ej	XC6122E750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHP	ec	XC6122E721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHR	ec	XC6122E722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHS	ec	XC6122E723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHT	ec	XC6122E724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHU	ec	XC6122E725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHV	ec	XC6122E726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHX	ec	XC6122E727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHY	ec	XC6122E728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FHZ	ec	XC6122E729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
FJ	-	BD4928FVE	Vdet-IC	2.8V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
FJ	-	BD4928G	Vdet-IC	2.8V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FK	-	BD4929FVE	Vdet-IC	2.9V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
FK	-	BD4929G	Vdet-IC	2.9V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FK0	ej	XC6122F530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FK1	ej	XC6122F531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FK2	ej	XC6122F532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FK3	ej	XC6122F533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FK4	ej	XC6122F534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FK5	ej	XC6122F535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FK6	ej	XC6122F536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FK7	ej	XC6122F537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FK8	ej	XC6122F538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FK9	ej	XC6122F539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKA	ej	XC6122F540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKB	ej	XC6122F541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKC	ej	XC6122F542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKD	ej	XC6122F543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKE	ej	XC6122F544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKF	ej	XC6122F545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKH	ec	XC6122F516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKH	ej	XC6122F546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKK	ec	XC6122F517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKK	ej	XC6122F547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKL	ec	XC6122F518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKL	ej	XC6122F548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKM	ec	XC6122F519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKM	ej	XC6122F549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKN	ec	XC6122F520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKN	ej	XC6122F550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKP	ec	XC6122F521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKR	ec	XC6122F522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKS	ec	XC6122F523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKT	ec	XC6122F524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKU	ec	XC6122F525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKV	ec	XC6122F526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKX	ec	XC6122F527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKY	ec	XC6122F528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FKZ	ec	XC6122F529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FL	-	AAT3221IGV-2.3	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
FL	-	BD4930FVE	Vdet-IC	3.0V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
FL	-	BD4930G	Vdet-IC	3.0V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FL	-	R1112N201B	LVR-IC	LDO, Low noise, 2.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FL0	-	XC6225A36AMR-G	LVR-IC	LDO, 3.65V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FL0	ej	XC6122F630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FL1	-	XC6225A37AMR-G	LVR-IC	LDO, 3.75V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FL1	ej	XC6122F631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FL2	-	XC6225A38AMR-G	LVR-IC	LDO, 3.85V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FL2	ej	XC6122F632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FL3	-	XC6225A39AMR-G	LVR-IC	LDO, 3.95V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FL3	ej	XC6122F633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FL4	-	XC6225A40AMR-G	LVR-IC	LDO, 4.05V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FL4	ej	XC6122F634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FL5	-	XC6225A41AMR-G	LVR-IC	LDO, 4.15V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FL5	ej	XC6122F635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FL6	-	XC6225A42AMR-G	LVR-IC	LDO, 4.25V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FL6	ej	XC6122F636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FL7	-	XC6225A43AMR-G	LVR-IC	LDO, 4.35V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FL7	ej	XC6122F637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FL8	-	XC6225A44AMR-G	LVR-IC	LDO, 4.45V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FL8	ej	XC6122F638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FL9	-	XC6225A45AMR-G	LVR-IC	LDO, 4.55V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FL9	ej	XC6122F639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLA	-	XC6225A46AMR-G	LVR-IC	LDO, 4.65V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FLA	ej	XC6122F640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLB	-	XC6225A47AMR-G	LVR-IC	LDO, 4.75V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FLB	ej	XC6122F641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLC	-	XC6225A48AMR-G	LVR-IC	LDO, 4.85V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FLC	ej	XC6122F642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLD	-	XC6225A49AMR-G	LVR-IC	LDO, 4.95V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FLD	ej	XC6122F643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLE	ej	XC6122F644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLF	ej	XC6122F645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLH	ec	XC6122F616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLH	ej	XC6122F646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLK	ec	XC6122F617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLK	ej	XC6122F647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLL	ec	XC6122F618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLL	ej	XC6122F648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLM	ec	XC6122F619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLM	ej	XC6122F649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLN	ec	XC6122F620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLN	ej	XC6122F650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLP	ec	XC6122F621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLR	ec	XC6122F622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLS	ec	XC6122F623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLT	ec	XC6122F624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLU	ec	XC6122F625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLV	ec	XC6122F626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLX	ec	XC6122F627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLY	ec	XC6122F628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FLZ	ec	XC6122F629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
fM	-	XC7SH125GW	CMOS-Log	Bus buffer gate with 3-state output	SOT-353-1	28	Log14	6a	Nxp
FM	-	AAT3221IGV-2.4	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
FM	-	BD4931FVE	Vdet-IC	3.1V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
FM	-	BD4931G	Vdet-IC	3.1V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FM	-	R1112N211B	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FM0	-	XC6225B36AMR-G	LVR-IC	LDO, 3.65V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FM0	ej	XC6122F730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FM1	-	XC6225B37AMR-G	LVR-IC	LDO, 3.75V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FM1	ej	XC6122F731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FM11G	-	AIC1746-11GK5	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM11P	-	AIC1746-11PK5	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM12G	-	AIC1746-12GK5	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM12P	-	AIC1746-12PK5	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM13G	-	AIC1746-13GK5	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM13P	-	AIC1746-13PK5	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM15G	-	AIC1746-15GK5	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM15P	-	AIC1746-15PK5	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM18G	-	AIC1746-18GK5	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM18P	-	AIC1746-18PK5	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM2	-	XC6225B38AMR-G	LVR-IC	LDO, 3.85V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FM2	ej	XC6122F732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FM20G	-	AIC1746-20GK5	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM20P	-	AIC1746-20PK5	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM25G	-	AIC1746-25GK5	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM25P	-	AIC1746-25PK5	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM27G	-	AIC1746-27GK5	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM27P	-	AIC1746-27PK5	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM2JG	-	AIC1746-285GK5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM2JP	-	AIC1746-285PK5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM3	-	XC6225B39AMR-G	LVR-IC	LDO, 3.95V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FM3	ej	XC6122F733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FM30G	-	AIC1746-30GK5	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM30P	-	AIC1746-30PK5	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM33G	-	AIC1746-33GK5	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM33P	-	AIC1746-33PK5	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM35G	-	AIC1746-35GK5	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FM35P	-	AIC1746-35PK5	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM37G	-	AIC1746-37GK5	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM37P	-	AIC1746-37PK5	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM38G	-	AIC1746-38GK5	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM38P	-	AIC1746-38PK5	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6a	Aic
FM4	-	XC6225B40AMR-G	LVR-IC	LDO, 4.05V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FM4	ej	XC6122F734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FM5	-	XC6225B41AMR-G	LVR-IC	LDO, 4.15V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FM5	ej	XC6122F735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FM6	-	XC6225B42AMR-G	LVR-IC	LDO, 4.25V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FM6	ej	XC6122F736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FM7	-	XC6225B43AMR-G	LVR-IC	LDO, 4.35V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FM7	ej	XC6122F737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FM8	-	XC6225B44AMR-G	LVR-IC	LDO, 4.45V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FM8	ej	XC6122F738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FM9	-	XC6225B45AMR-G	LVR-IC	LDO, 4.55V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FM9	ej	XC6122F739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMA	-	XC6225B46AMR-G	LVR-IC	LDO, 4.65V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FMA	ej	XC6122F740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMB	-	XC6225B47AMR-G	LVR-IC	LDO, 4.75V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FMB	ej	XC6122F741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMC	-	XC6225B48AMR-G	LVR-IC	LDO, 4.85V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FMC	ej	XC6122F742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMD	-	XC6225B49AMR-G	LVR-IC	LDO, 4.95V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FMD	ej	XC6122F743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FME	ej	XC6122F744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMF	ej	XC6122F745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMH	ec	XC6122F716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMH	ej	XC6122F746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMK	ec	XC6122F717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMK	ej	XC6122F747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FML	ec	XC6122F718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FML	ej	XC6122F748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMM	ec	XC6122F719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMM	ej	XC6122F749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMN	ec	XC6122F720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMN	ej	XC6122F750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMP	ec	XC6122F721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMR	ec	XC6122F722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMS	ec	XC6122F723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMT	ec	XC6122F724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMU	ec	XC6122F725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMV	ec	XC6122F726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMX	ec	XC6122F727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMY	ec	XC6122F728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FMZ	ec	XC6122F729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
FN	-	BD4932FVE	Vdet-IC	3.2V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
FN	-	BD4932G	Vdet-IC	3.2V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FN	-	R1112N221B	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FN0	ej	XC6122A230MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FN1	ej	XC6122A231MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FN2	ej	XC6122A232MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FN3	ej	XC6122A233MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FN4	ej	XC6122A234MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FN5	ej	XC6122A235MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FN6	ej	XC6122A236MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FN7	ej	XC6122A237MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FN8	ej	XC6122A238MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FN9	ej	XC6122A239MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNA	ej	XC6122A240MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNB	ej	XC6122A241MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNC	ej	XC6122A242MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FND	ej	XC6122A243MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNE	ej	XC6122A244MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNF	ej	XC6122A245MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNH	ec	XC6122A216MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNH	ej	XC6122A246MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNK	ec	XC6122A217MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNK	ej	XC6122A247MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNL	ec	XC6122A218MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FNL	ej	XC6122A248MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNM	ec	XC6122A219MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNM	ej	XC6122A249MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNN	ec	XC6122A220MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNN	ej	XC6122A250MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNP	ec	XC6122A221MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNR	ec	XC6122A222MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNS	ec	XC6122A223MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNT	ec	XC6122A224MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNU	ec	XC6122A225MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNV	ec	XC6122A226MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNX	ec	XC6122A227MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNY	ec	XC6122A228MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FNZ	ec	XC6122A229MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FO11G	-	AIC1746-11GV5	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO11P	-	AIC1746-11PV5	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO12G	-	AIC1746-12GV5	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO12P	-	AIC1746-12PV5	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO13G	-	AIC1746-13GV5	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO13P	-	AIC1746-13PV5	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO15G	-	AIC1746-15GV5	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO15P	-	AIC1746-15PV5	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO18G	-	AIC1746-18GV5	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO18P	-	AIC1746-18PV5	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO20G	-	AIC1746-20GV5	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO20P	-	AIC1746-20PV5	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO25G	-	AIC1746-25GV5	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO25P	-	AIC1746-25PV5	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO27G	-	AIC1746-27GV5	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO27P	-	AIC1746-27PV5	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO2JG	-	AIC1746-285GV5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO2JP	-	AIC1746-285PV5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO30G	-	AIC1746-30GV5	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO30P	-	AIC1746-30PV5	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO33G	-	AIC1746-33GV5	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO33P	-	AIC1746-33PV5	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO35G	-	AIC1746-35GV5	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO35P	-	AIC1746-35PV5	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO37G	-	AIC1746-37GV5	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO37P	-	AIC1746-37PV5	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO38G	-	AIC1746-38GV5	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FO38P	-	AIC1746-38PV5	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
FP	-	BD4933FVE	Vdet-IC	3.3V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
FP	-	BD4933G	Vdet-IC	3.3V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FP	-	R1112N231B	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FP0	ej	XC6122A330MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FP1	ej	XC6122A331MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FP2	ej	XC6122A332MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FP3	ej	XC6122A333MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FP4	ej	XC6122A334MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FP5	ej	XC6122A335MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FP6	ej	XC6122A336MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FP7	ej	XC6122A337MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FP8	ej	XC6122A338MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FP9	ej	XC6122A339MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPA	ej	XC6122A340MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPB	ej	XC6122A341MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPC	ej	XC6122A342MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPD	ej	XC6122A343MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPE	ej	XC6122A344MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPF	ej	XC6122A345MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPH	ec	XC6122A316MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPH	ej	XC6122A346MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPK	ec	XC6122A317MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPK	ej	XC6122A347MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPL	ec	XC6122A318MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPL	ej	XC6122A348MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPM	ec	XC6122A319MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPM	ej	XC6122A349MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPN	ec	XC6122A320MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FPN	ej	XC6122A350MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPP	ec	XC6122A321MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPR	ec	XC6122A322MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPS	ec	XC6122A323MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPT	ec	XC6122A324MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPU	ec	XC6122A325MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPV	ec	XC6122A326MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPX	ec	XC6122A327MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPY	ec	XC6122A328MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FPZ	ec	XC6122A329MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FQ	-	BD4934FVE	Vdet-IC	3.4V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
FQ	-	BD4934G	Vdet-IC	3.4V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FQ	-	R1112N241B	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FR	-	AT1201-45XR	LVR-IC	LDO, LN, +CE, 4.5V±2%, 150mA	SOT-23-5	28un	VR7	6a	Atr
FR	-	BD4935FVE	Vdet-IC	3.5V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
FR	-	BD4935G	Vdet-IC	3.5V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FR	-	R1112N251B	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FR0	-	XC6901D091MR-G	LVR-IC	-0.9V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FR0	ej	XC6122A430MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FR1	-	XC6901D101MR-G	LVR-IC	-1.0V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FR1	ej	XC6122A431MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FR2	-	XC6901D111MR-G	LVR-IC	-1.1V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FR2	ej	XC6122A432MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FR3	-	XC6901D121MR-G	LVR-IC	-1.2V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FR3	ej	XC6122A433MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FR4	-	XC6901D131MR-G	LVR-IC	-1.3V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FR4	ej	XC6122A434MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FR5	-	XC6901D141MR-G	LVR-IC	-1.4V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FR5	ej	XC6122A435MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FR6	-	XC6901D151MR-G	LVR-IC	-1.5V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FR6	ej	XC6122A436MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FR7	-	XC6901D161MR-G	LVR-IC	-1.6V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FR7	ej	XC6122A437MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FR8	-	XC6901D171MR-G	LVR-IC	-1.7V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FR8	ej	XC6122A438MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FR9	-	XC6901D181MR-G	LVR-IC	-1.8V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FR9	ej	XC6122A439MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRA	-	XC6901D191MR-G	LVR-IC	-1.9V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRA	ej	XC6122A440MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRB	-	XC6901D201MR-G	LVR-IC	-2.0V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRB	ej	XC6122A441MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRC	-	XC6901D211MR-G	LVR-IC	-2.1V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRC	ej	XC6122A442MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRD	-	XC6901D221MR-G	LVR-IC	-2.2V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRD	ej	XC6122A443MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRE	-	XC6901D231MR-G	LVR-IC	-2.3V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRE	ej	XC6122A444MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRF	-	XC6901D241MR-G	LVR-IC	-2.4V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRF	ej	XC6122A445MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRH	-	XC6901D251MR-G	LVR-IC	-2.5V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRH	ec	XC6122A416MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRH	ej	XC6122A446MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRK	-	XC6901D261MR-G	LVR-IC	-2.6V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRK	ec	XC6122A417MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRK	ej	XC6122A447MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRL	-	XC6901D271MR-G	LVR-IC	-2.7V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRL	ec	XC6122A418MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRL	ej	XC6122A448MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRM	-	XC6901D281MR-G	LVR-IC	-2.8V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRM	ec	XC6122A419MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRM	ej	XC6122A449MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRN	-	XC6901D291MR-G	LVR-IC	-2.9V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRN	ec	XC6122A420MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRN	ej	XC6122A450MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRP	-	XC6901D301MR-G	LVR-IC	-3.0V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRP	ec	XC6122A421MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRR	-	XC6901D311MR-G	LVR-IC	-3.1V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRR	ec	XC6122A422MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRS	-	XC6901D321MR-G	LVR-IC	-3.2V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRS	ec	XC6122A423MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FRT	-	XC6901D331MR-G	LVR-IC	-3.3V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRT	ec	XC6122A424MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRU	-	XC6901D341MR-G	LVR-IC	-3.4V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRU	ec	XC6122A425MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRV	-	XC6901D351MR-G	LVR-IC	-3.5V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRV	ec	XC6122A426MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRX	-	XC6901D361MR-G	LVR-IC	-3.6V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRX	ec	XC6122A427MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRY	-	XC6901D371MR-G	LVR-IC	-3.7V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRY	ec	XC6122A428MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FRZ	-	XC6901D381MR-G	LVR-IC	-3.8V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FRZ	ec	XC6122A429MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FS	-	BD4936FVE	Vdet-IC	3.6V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
FS	-	BD4936G	Vdet-IC	3.6V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FS	-	R1112N261B	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FS0	-	XC6901D391MR-G	LVR-IC	-3.9V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FS0	ej	XC6122A530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FS1	-	XC6901D401MR-G	LVR-IC	-4.0V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FS1	ej	XC6122A531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FS2	-	XC6901D411MR-G	LVR-IC	-4.1V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FS2	ej	XC6122A532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FS3	-	XC6901D421MR-G	LVR-IC	-4.2V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FS3	ej	XC6122A533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FS4	-	XC6901D431MR-G	LVR-IC	-4.3V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FS4	ej	XC6122A534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FS5	-	XC6901D441MR-G	LVR-IC	-4.4V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FS5	ej	XC6122A535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FS6	-	XC6901D451MR-G	LVR-IC	-4.5V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FS6	ej	XC6122A536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FS7	-	XC6901D461MR-G	LVR-IC	-4.6V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FS7	ej	XC6122A537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FS8	-	XC6901D471MR-G	LVR-IC	-4.7V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FS8	ej	XC6122A538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FS9	-	XC6901D481MR-G	LVR-IC	-4.8V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FS9	ej	XC6122A539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSA	-	XC6901D491MR-G	LVR-IC	-4.9V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSA	ej	XC6122A540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSB	-	XC6901D501MR-G	LVR-IC	-5.0V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSB	ej	XC6122A541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSC	-	XC6901D511MR-G	LVR-IC	-5.1V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSC	ej	XC6122A542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSD	-	XC6901D521MR-G	LVR-IC	-5.2V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSD	ej	XC6122A543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSE	-	XC6901D531MR-G	LVR-IC	-5.3V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSE	ej	XC6122A544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSF	-	XC6901D541MR-G	LVR-IC	-5.4V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSF	ej	XC6122A545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSH	-	XC6901D551MR-G	LVR-IC	-5.5V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSH	ec	XC6122A516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSH	ej	XC6122A546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSK	-	XC6901D561MR-G	LVR-IC	-5.6V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSK	ec	XC6122A517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSK	ej	XC6122A547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSL	-	XC6901D571MR-G	LVR-IC	-5.7V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSL	ec	XC6122A518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSL	ej	XC6122A548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSM	-	XC6901D581MR-G	LVR-IC	-5.8V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSM	ec	XC6122A519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSM	ej	XC6122A549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSN	-	XC6901D591MR-G	LVR-IC	-5.9V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSN	ec	XC6122A520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSN	ej	XC6122A550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSP	-	XC6901D601MR-G	LVR-IC	-6.0V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSP	ec	XC6122A521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSR	-	XC6901D611MR-G	LVR-IC	-6.1V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSR	ec	XC6122A522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSS	-	XC6901D621MR-G	LVR-IC	-6.2V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSS	ec	XC6122A523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FST	-	XC6901D631MR-G	LVR-IC	-6.3V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FST	ec	XC6122A524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FSU	-	XC6901D641MR-G	LVR-IC	-6.4V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSU	ec	XC6122A525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSV	-	XC6901D651MR-G	LVR-IC	-6.5V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSV	ec	XC6122A526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSX	-	XC6901D661MR-G	LVR-IC	-6.6V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSX	ec	XC6122A527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSY	-	XC6901D671MR-G	LVR-IC	-6.7V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSY	ec	XC6122A528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FSZ	-	XC6901D681MR-G	LVR-IC	-6.8V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FSZ	ec	XC6122A529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FT	-	BD4937FVE	Vdet-IC	3.7V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
FT	-	BD4937G	Vdet-IC	3.7V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FT	-	R1112N271B	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FT0	-	XC6901D691MR-G	LVR-IC	-6.9V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FT0	ej	XC6122A730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FT1	-	XC6901D701MR-G	LVR-IC	-7.0V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FT1	ej	XC6122A731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FT2	-	XC6901D711MR-G	LVR-IC	-7.1V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FT2	ej	XC6122A732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FT3	-	XC6901D721MR-G	LVR-IC	-7.2V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FT3	ej	XC6122A733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FT4	-	XC6901D731MR-G	LVR-IC	-7.3V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FT4	ej	XC6122A734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FT5	-	XC6901D741MR-G	LVR-IC	-7.4V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FT5	ej	XC6122A735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FT6	-	XC6901D751MR-G	LVR-IC	-7.5V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FT6	ej	XC6122A736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FT7	-	XC6901D761MR-G	LVR-IC	-7.6V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FT7	ej	XC6122A737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FT8	-	XC6901D771MR-G	LVR-IC	-7.7V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FT8	ej	XC6122A738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FT9	-	XC6901D781MR-G	LVR-IC	-7.8V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FT9	ej	XC6122A739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTA	-	XC6901D791MR-G	LVR-IC	-7.9V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTA	ej	XC6122A740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTB	-	XC6901D801MR-G	LVR-IC	-8.0V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTB	ej	XC6122A741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTC	-	XC6901D811MR-G	LVR-IC	-8.1V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTC	ej	XC6122A742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTD	-	XC6901D821MR-G	LVR-IC	-8.2V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTD	ej	XC6122A743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTE	-	XC6901D831MR-G	LVR-IC	-8.3V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTE	ej	XC6122A744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTF	-	XC6901D841MR-G	LVR-IC	-8.4V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTF	ej	XC6122A745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTH	-	XC6901D851MR-G	LVR-IC	-8.5V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTH	ec	XC6122A716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTH	ej	XC6122A746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTK	-	XC6901D861MR-G	LVR-IC	-8.6V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTK	ec	XC6122A717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTK	ej	XC6122A747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTL	-	XC6901D871MR-G	LVR-IC	-8.7V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTL	ec	XC6122A718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTL	ej	XC6122A748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTM	-	XC6901D881MR-G	LVR-IC	-8.8V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTM	ec	XC6122A719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTM	ej	XC6122A749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTN	-	XC6901D891MR-G	LVR-IC	-8.9V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTN	ec	XC6122A720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTN	ej	XC6122A750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTP	-	XC6901D901MR-G	LVR-IC	-9.0V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTP	ec	XC6122A721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTR	-	XC6901D911MR-G	LVR-IC	-9.1V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTR	ec	XC6122A722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTS	-	XC6901D921MR-G	LVR-IC	-9.2V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTS	ec	XC6122A723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTT	-	XC6901D931MR-G	LVR-IC	-9.3V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTT	ec	XC6122A724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTU	-	XC6901D941MR-G	LVR-IC	-9.4V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTU	ec	XC6122A725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FTV	-	XC6901D951MR-G	LVR-IC	-9.5V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTV	ec	XC6122A726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTX	-	XC6901D961MR-G	LVR-IC	-9.6V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTX	ec	XC6122A727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTY	-	XC6901D971MR-G	LVR-IC	-9.7V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTY	ec	XC6122A728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FTZ	-	XC6901D981MR-G	LVR-IC	-9.8V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FTZ	ec	XC6122A729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FU	-	BD4938FVE	Vdet-IC	3.8V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
FU	-	BD4938G	Vdet-IC	3.8V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FU	-	R1112N281B	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FU0	-	XC6901D991MR-G	LVR-IC	-9.9V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FU0	ej	XC6122A630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FU1	-	XC6901DA01MR-G	LVR-IC	-10.0V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FU1	ej	XC6122A631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FU2	-	XC6901DA11MR-G	LVR-IC	-10.1V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FU2	ej	XC6122A632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FU3	-	XC6901DA21MR-G	LVR-IC	-10.2V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FU3	ej	XC6122A633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
fU4	-	XC7SHU04GV	CMOS-Log	Inverter	SOT753	28	Log6	6a	Nxp
FU4	-	XC6901DA31MR-G	LVR-IC	-10.3V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FU4	ej	XC6122A634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FU5	-	XC6901DA41MR-G	LVR-IC	-10.4V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FU5	ej	XC6122A635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FU6	-	XC6901DA51MR-G	LVR-IC	-10.5V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FU6	ej	XC6122A636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FU7	-	XC6901DA61MR-G	LVR-IC	-10.6V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FU7	ej	XC6122A637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FU8	-	XC6901DA71MR-G	LVR-IC	-10.7V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FU8	ej	XC6122A638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FU9	-	XC6901DA81MR-G	LVR-IC	-10.8V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FU9	ej	XC6122A639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUA	-	XC6901DA91MR-G	LVR-IC	-10.9V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FUA	ej	XC6122A640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUB	-	XC6901DB01MR-G	LVR-IC	-11.0V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FUB	ej	XC6122A641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUC	-	XC6901DB11MR-G	LVR-IC	-11.1V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FUC	ej	XC6122A642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUD	-	XC6901DB21MR-G	LVR-IC	-11.2V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FUD	ej	XC6122A643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUE	-	XC6901DB31MR-G	LVR-IC	-11.3V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FUE	ej	XC6122A644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUF	-	XC6901DB41MR-G	LVR-IC	-11.4V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FUF	ej	XC6122A645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUH	-	XC6901DB51MR-G	LVR-IC	-11.5V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FUH	ec	XC6122A616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUH	ej	XC6122A646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUK	-	XC6901DB61MR-G	LVR-IC	-11.6V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FUK	ec	XC6122A617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUK	ej	XC6122A647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUL	-	XC6901DB71MR-G	LVR-IC	-11.7V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FUL	ec	XC6122A618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUL	ej	XC6122A648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUM	-	XC6901DB81MR-G	LVR-IC	-11.8V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FUM	ec	XC6122A619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUM	ej	XC6122A649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUN	-	XC6901DB91MR-G	LVR-IC	-11.9V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FUN	ec	XC6122A620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUN	ej	XC6122A650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUP	-	XC6901DC01MR-G	LVR-IC	-12.0V±1.5%, 200mA, +CE, CL	SOT-25	28ew	VR7	6g	Tor
FUP	ec	XC6122A621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUR	ec	XC6122A622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUS	ec	XC6122A623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUT	ec	XC6122A624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUU	ec	XC6122A625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUV	ec	XC6122A626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUX	ec	XC6122A627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUY	ec	XC6122A628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FUZ	ec	XC6122A629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
FV	-	BD4939FVE	Vdet-IC	3.9V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FV	-	BD4939G	Vdet-IC	3.9V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
FV	-	R1112N291B	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
FV0	ej	XC6122C230MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FV1	ej	XC6122C231MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FV11G	-	AIC1747-11GV5N	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV11P	-	AIC1747-11PV5N	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV12G	-	AIC1747-12GV5N	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV12P	-	AIC1747-12PV5N	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV13G	-	AIC1747-13GV5N	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV13P	-	AIC1747-13PV5N	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV15G	-	AIC1747-15GV5N	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV15P	-	AIC1747-15PV5N	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV18G	-	AIC1747-18GV5N	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV18P	-	AIC1747-18PV5N	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV2	-	XC6225A082MR-G	LVR-IC	LDO, 0.8V±30mV, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FV2	ej	XC6122C232MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FV20G	-	AIC1747-20GV5N	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV20P	-	AIC1747-20PV5N	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV25G	-	AIC1747-25GV5N	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV25P	-	AIC1747-25PV5N	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV27G	-	AIC1747-27GV5N	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV27P	-	AIC1747-27PV5N	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV2JG	-	AIC1747-285GV5N	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV2JP	-	AIC1747-285PV5N	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV3	-	XC6225A092MR-G	LVR-IC	LDO, 0.9V±30mV, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FV3	ej	XC6122C233MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FV30G	-	AIC1747-30GV5N	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV30P	-	AIC1747-30PV5N	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV33G	-	AIC1747-33GV5N	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV33P	-	AIC1747-33PV5N	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV35G	-	AIC1747-35GV5N	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV35P	-	AIC1747-35PV5N	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV37G	-	AIC1747-37GV5N	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV37P	-	AIC1747-37PV5N	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV38G	-	AIC1747-38GV5N	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV38P	-	AIC1747-38PV5N	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FV4	-	XC6225A102MR-G	LVR-IC	LDO, 1.0V±30mV, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FV4	ej	XC6122C234MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FV5	-	XC6225A112MR-G	LVR-IC	LDO, 1.1V±30mV, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FV5	ej	XC6122C235MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FV6	-	XC6225A122MR-G	LVR-IC	LDO, 1.2V±30mV, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FV6	ej	XC6122C236MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FV7	-	XC6225A132MR-G	LVR-IC	LDO, 1.3V±30mV, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FV7	ej	XC6122C237MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FV8	-	XC6225A142MR-G	LVR-IC	LDO, 1.4V±30mV, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FV8	ej	XC6122C238MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FV9	-	XC6225A152MR-G	LVR-IC	LDO, 1.5V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FV9	ej	XC6122C239MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVA	-	XC6225A162MR-G	LVR-IC	LDO, 1.6V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVA	ej	XC6122C240MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVB	-	XC6225A172MR-G	LVR-IC	LDO, 1.7V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVB	ej	XC6122C241MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVC	-	XC6225A182MR-G	LVR-IC	LDO, 1.8V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVC	ej	XC6122C242MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVD	-	XC6225A192MR-G	LVR-IC	LDO, 1.9V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVD	ej	XC6122C243MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVE	-	XC6225A202MR-G	LVR-IC	LDO, 2.0V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVE	ej	XC6122C244MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVF	-	XC6225A212MR-G	LVR-IC	LDO, 2.1V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVF	ej	XC6122C245MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVH	-	XC6225A222MR-G	LVR-IC	LDO, 2.2V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVH	ec	XC6122C216MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVH	ej	XC6122C246MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVK	-	XC6225A232MR-G	LVR-IC	LDO, 2.3V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVK	ec	XC6122C217MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVK	ej	XC6122C247MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVL	-	XC6225A242MR-G	LVR-IC	LDO, 2.4V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVL	ec	XC6122C218MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVL	ej	XC6122C248MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVM	-	XC6225A252MR-G	LVR-IC	LDO, 2.5V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FVM	ec	XC6122C219MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVM	ej	XC6122C249MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVN	-	XC6225A262MR-G	LVR-IC	LDO, 2.6V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVN	ec	XC6122C220MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVN	ej	XC6122C250MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVP	-	XC6225A272MR-G	LVR-IC	LDO, 2.7V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVP	ec	XC6122C221MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVR	-	XC6225A282MR-G	LVR-IC	LDO, 2.8V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVR	ec	XC6122C222MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVS	-	XC6225A292MR-G	LVR-IC	LDO, 2.9V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVS	ec	XC6122C223MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVT	-	XC6225A302MR-G	LVR-IC	LDO, 3.0V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVT	ec	XC6122C224MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVU	-	XC6225A312MR-G	LVR-IC	LDO, 3.1V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVU	ec	XC6122C225MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVV	-	XC6225A322MR-G	LVR-IC	LDO, 3.2V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVV	ec	XC6122C226MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVX	-	XC6225A332MR-G	LVR-IC	LDO, 3.3V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVX	ec	XC6122C227MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVY	-	XC6225A342MR-G	LVR-IC	LDO, 3.4V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVY	ec	XC6122C228MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FVZ	-	XC6225A352MR-G	LVR-IC	LDO, 3.5V±2%, 30mA, +CE	SOT-25	28cx	VR4	6g	Tor
FVZ	ec	XC6122C229MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FW11G	-	AIC1746-11GV5N	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW11P	-	AIC1746-11PV5N	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW12G	-	AIC1746-12GV5N	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW12P	-	AIC1746-12PV5N	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW13G	-	AIC1746-13GV5N	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW13P	-	AIC1746-13PV5N	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW15G	-	AIC1746-15GV5N	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW15P	-	AIC1746-15PV5N	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW18G	-	AIC1746-18GV5N	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW18P	-	AIC1746-18PV5N	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW20G	-	AIC1746-20GV5N	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW20P	-	AIC1746-20PV5N	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW25G	-	AIC1746-25GV5N	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW25P	-	AIC1746-25PV5N	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW27G	-	AIC1746-27GV5N	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW27P	-	AIC1746-27PV5N	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW2JG	-	AIC1746-285GV5N	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW2JP	-	AIC1746-285PV5N	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW30G	-	AIC1746-30GV5N	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW30P	-	AIC1746-30PV5N	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW33G	-	AIC1746-33GV5N	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW33P	-	AIC1746-33PV5N	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW35G	-	AIC1746-35GV5N	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW35P	-	AIC1746-35PV5N	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW37G	-	AIC1746-37GV5N	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW37P	-	AIC1746-37PV5N	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW38G	-	AIC1746-38GV5N	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FW38P	-	AIC1746-38PV5N	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Aic
FX	-	AT1201-45X	LVR-IC	LDO, LN, +CE, 4.5V±2%, 150mA	SOT-23-5	28vrx	VR7	6a	Atr
FX0	ej	XC6122C330MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FX1	ej	XC6122C331MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FX2	-	XC6225B082MR-G	LVR-IC	LDO, 0.8V±30mV, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FX2	ej	XC6122C332MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FX3	-	XC6225B092MR-G	LVR-IC	LDO, 0.9V±30mV, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FX3	ej	XC6122C333MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FX4	-	XC6225B102MR-G	LVR-IC	LDO, 1.0V±30mV, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FX4	ej	XC6122C334MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FX5	-	XC6225B112MR-G	LVR-IC	LDO, 1.1V±30mV, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FX5	ej	XC6122C335MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FX6	-	XC6225B122MR-G	LVR-IC	LDO, 1.2V±30mV, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FX6	ej	XC6122C336MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FX7	-	XC6225B132MR-G	LVR-IC	LDO, 1.3V±30mV, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FX7	ej	XC6122C337MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FX8	-	XC6225B142MR-G	LVR-IC	LDO, 1.4V±30mV, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FX8	ej	XC6122C338MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FX9	-	XC6225B152MR-G	LVR-IC	LDO, 1.5V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FX9	ej	XC6122C339MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FXA	-	XC6225B162MR-G	LVR-IC	LDO, 1.6V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXA	ej	XC6122C340MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXB	-	XC6225B172MR-G	LVR-IC	LDO, 1.7V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXB	ej	XC6122C341MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXC	-	XC6225B182MR-G	LVR-IC	LDO, 1.8V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXC	ej	XC6122C342MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXD	-	XC6225B18AMR-G	LVR-IC	LDO, 1.85V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXD	ej	XC6122C343MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXE	-	XC6225B202MR-G	LVR-IC	LDO, 2.0V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXE	ej	XC6122C344MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXF	-	XC6225B212MR-G	LVR-IC	LDO, 2.1V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXF	ej	XC6122C345MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXH	-	XC6225B222MR-G	LVR-IC	LDO, 2.2V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXH	ec	XC6122C316MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXH	ej	XC6122C346MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXK	-	XC6225B232MR-G	LVR-IC	LDO, 2.3V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXK	ec	XC6122C317MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXK	ej	XC6122C347MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXL	-	XC6225B242MR-G	LVR-IC	LDO, 2.4V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXL	ec	XC6122C318MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXL	ej	XC6122C348MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXM	-	XC6225B252MR-G	LVR-IC	LDO, 2.5V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXM	ec	XC6122C319MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXM	ej	XC6122C349MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXN	-	XC6225B262MR-G	LVR-IC	LDO, 2.6V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXN	ec	XC6122C320MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXN	ej	XC6122C350MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXP	-	XC6225B272MR-G	LVR-IC	LDO, 2.7V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXP	ec	XC6122C321MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXR	-	XC6225B282MR-G	LVR-IC	LDO, 2.8V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXR	ec	XC6122C322MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXS	-	XC6225B292MR-G	LVR-IC	LDO, 2.9V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXS	ec	XC6122C323MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXT	-	XC6225B302MR-G	LVR-IC	LDO, 3.0V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXT	ec	XC6122C324MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXU	-	XC6225B312MR-G	LVR-IC	LDO, 3.1V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXU	ec	XC6122C325MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXV	-	XC6225B322MR-G	LVR-IC	LDO, 3.2V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXV	ec	XC6122C326MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXX	-	XC6225B332MR-G	LVR-IC	LDO, 3.3V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXX	ec	XC6122C327MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXY	-	XC6225B342MR-G	LVR-IC	LDO, 3.4V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXY	ec	XC6122C328MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FXZ	-	XC6225B352MR-G	LVR-IC	LDO, 3.5V±2%, 30mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
FXZ	ec	XC6122C329MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FY0	ej	XC6122C430MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FY1	ej	XC6122C431MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FY11G	-	AIC1746-11GK5N	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY11P	-	AIC1746-11PK5N	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY12G	-	AIC1746-12GK5N	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY12P	-	AIC1746-12PK5N	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY13G	-	AIC1746-13GK5N	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY13P	-	AIC1746-13PK5N	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY15G	-	AIC1746-15GK5N	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY15P	-	AIC1746-15PK5N	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY18G	-	AIC1746-18GK5N	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY18P	-	AIC1746-18PK5N	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY2	ej	XC6122C432MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FY20G	-	AIC1746-20GK5N	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY20P	-	AIC1746-20PK5N	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY25G	-	AIC1746-25GK5N	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY25P	-	AIC1746-25PK5N	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY27G	-	AIC1746-27GK5N	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY27P	-	AIC1746-27PK5N	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY2JG	-	AIC1746-285GK5N	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY2JP	-	AIC1746-285PK5N	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY3	ej	XC6122C433MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FY30G	-	AIC1746-30GK5N	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY30P	-	AIC1746-30PK5N	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY33G	-	AIC1746-33GK5N	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FY33P	-	AIC1746-33PK5N	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY35G	-	AIC1746-35GK5N	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY35P	-	AIC1746-35PK5N	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY37G	-	AIC1746-37GK5N	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY37P	-	AIC1746-37PK5N	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY38G	-	AIC1746-38GK5N	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY38P	-	AIC1746-38PK5N	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FY4	ej	XC6122C434MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FY5	ej	XC6122C435MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FY6	ej	XC6122C436MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FY7	ej	XC6122C437MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FY8	ej	XC6122C438MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FY9	ej	XC6122C439MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYA	ej	XC6122C440MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYB	ej	XC6122C441MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYC	ej	XC6122C442MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYD	ej	XC6122C443MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYE	ej	XC6122C444MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYF	ej	XC6122C445MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYH	ec	XC6122C416MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYH	ej	XC6122C446MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYK	ec	XC6122C417MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYK	ej	XC6122C447MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYL	ec	XC6122C418MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYL	ej	XC6122C448MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYM	ec	XC6122C419MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYM	ej	XC6122C449MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYN	ec	XC6122C420MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYN	ej	XC6122C450MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYP	ec	XC6122C421MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYR	ec	XC6122C422MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYS	ec	XC6122C423MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYT	ec	XC6122C424MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYU	ec	XC6122C425MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYV	ec	XC6122C426MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYX	ec	XC6122C427MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYY	ec	XC6122C428MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FYZ	ec	XC6122C429MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZ	-	AP1521W	LDR-IC	Step-up DC-DC converter for LED drive (3.3V, 5V)	SOT-23-5L	28sq	LD3	6a	Ana
FZ0	ej	XC6122C530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZ1	ej	XC6122C531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZ11G	-	AIC1747-11GK5N	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ11P	-	AIC1747-11PK5N	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ12G	-	AIC1747-12GK5N	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ12P	-	AIC1747-12PK5N	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ13G	-	AIC1747-13GK5N	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ13P	-	AIC1747-13PK5N	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ15G	-	AIC1747-15GK5N	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ15P	-	AIC1747-15PK5N	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ18G	-	AIC1747-18GK5N	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ18P	-	AIC1747-18PK5N	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ2	ej	XC6122C532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZ20G	-	AIC1747-20GK5N	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ20P	-	AIC1747-20PK5N	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ25G	-	AIC1747-25GK5N	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ25P	-	AIC1747-25PK5N	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ27G	-	AIC1747-27GK5N	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ27P	-	AIC1747-27PK5N	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ2JG	-	AIC1747-285GK5N	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ2JP	-	AIC1747-285PK5N	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ3	ej	XC6122C533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZ30G	-	AIC1747-30GK5N	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ30P	-	AIC1747-30PK5N	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ33G	-	AIC1747-33GK5N	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ33P	-	AIC1747-33PK5N	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ35G	-	AIC1747-35GK5N	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ35P	-	AIC1747-35PK5N	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ37G	-	AIC1747-37GK5N	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ37P	-	AIC1747-37PK5N	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ38G	-	AIC1747-38GK5N	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FZ38P	-	AIC1747-38PK5N	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	TSOT-23-5	28cx	VR4	6a	Aic
FZ4	ej	XC6122C534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZ5	ej	XC6122C535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZ6	ej	XC6122C536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZ7	ej	XC6122C537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZ8	ej	XC6122C538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZ9	ej	XC6122C539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZA	ej	XC6122C540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZB	ej	XC6122C541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZC	ej	XC6122C542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZD	ej	XC6122C543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZE	ej	XC6122C544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZF	ej	XC6122C545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZH	ec	XC6122C516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZH	ej	XC6122C546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZK	ec	XC6122C517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZK	ej	XC6122C547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZL	ec	XC6122C518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZL	ej	XC6122C548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZM	ec	XC6122C519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZM	ej	XC6122C549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZN	ec	XC6122C520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZN	ej	XC6122C550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZP	ec	XC6122C521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZR	ec	XC6122C522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZS	ec	XC6122C523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZT	ec	XC6122C524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZU	ec	XC6122C525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZV	ec	XC6122C526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZX	ec	XC6122C527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZY	ec	XC6122C528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
FZZ	ec	XC6122C529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
G0	-	BU27TD3WG	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
G0	-	ELM89302B	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
G0	-	FP6801-27CS5P	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Fit
G0	-	MC78PC30N	LVR-IC	LDO, LN, +CE, 3V±2.5%, 100mA	SOT-23-5	28cx	VR4	6b	Ons
G0	-	R1111N301B	LVR-IC	LDO, Low noise, 3.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G0	ea	RN5VD60AA	Vdet-IC	6V±2.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Ric
G0	eu	BL8555-20SQ	LVR-IC	LDO, 2.0V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G0	eu	BL8555-20SRA	LVR-IC	LDO, 2.0V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G0	eu	BL8555-20SRB	LVR-IC	LDO, 2.0V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G0	eu	LR8555-20SQ	LVR-IC	LDO, 2.0V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G0	eu	LR8555-20SRA	LVR-IC	LDO, 2.0V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G0	eu	LR8555-20SRB	LVR-IC	LDO, 2.0V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G0	fg	BL8555-30SQ	LVR-IC	LDO, 3.0V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G0	fg	BL8555-30SRA	LVR-IC	LDO, 3.0V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G0	fg	BL8555-30SRB	LVR-IC	LDO, 3.0V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G0	fg	LR8555-30SQ	LVR-IC	LDO, 3.0V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G0	fg	LR8555-30SRA	LVR-IC	LDO, 3.0V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G0	fg	LR8555-30SRB	LVR-IC	LDO, 3.0V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G0	fh	BL8555-40SQ	LVR-IC	LDO, 4.0V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G0	fh	BL8555-40SRA	LVR-IC	LDO, 4.0V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G0	fh	BL8555-40SRB	LVR-IC	LDO, 4.0V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G0	fh	LR8555-40SQ	LVR-IC	LDO, 4.0V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G0	fh	LR8555-40SRA	LVR-IC	LDO, 4.0V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G0	fh	LR8555-40SRB	LVR-IC	LDO, 4.0V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G0	fi	BL8555-50SQ	LVR-IC	LDO, 5.0V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G0	fi	BL8555-50SRA	LVR-IC	LDO, 5.0V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G0	fi	BL8555-50SRB	LVR-IC	LDO, 5.0V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G0	fi	LR8555-50SQ	LVR-IC	LDO, 5.0V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G0	fi	LR8555-50SRA	LVR-IC	LDO, 5.0V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G0	fi	LR8555-50SRB	LVR-IC	LDO, 5.0V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G0	fk	BL8555-30GQ	LVR-IC	LDO, 3.0V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G0	fk	BL8555-30GRA	LVR-IC	LDO, 3.0V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G0	fk	BL8555-30GRB	LVR-IC	LDO, 3.0V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G0	fk	LR8555-30GQ	LVR-IC	LDO, 3.0V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G0	fk	LR8555-30GRA	LVR-IC	LDO, 3.0V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G0	fk	LR8555-30GRB	LVR-IC	LDO, 3.0V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G0	fm	BL8555-40GQ	LVR-IC	LDO, 4.0V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G0	fm	BL8555-40GRA	LVR-IC	LDO, 4.0V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G0	fm	BL8555-40GRB	LVR-IC	LDO, 4.0V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G0	fm	LR8555-40GQ	LVR-IC	LDO, 4.0V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G0	fm	LR8555-40GRA	LVR-IC	LDO, 4.0V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G0	fm	LR8555-40GRB	LVR-IC	LDO, 4.0V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G0	fn	BL8555-50GQ	LVR-IC	LDO, 5.0V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G0	fn	BL8555-50GRA	LVR-IC	LDO, 5.0V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G0	fn	BL8555-50GRB	LVR-IC	LDO, 5.0V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G0	fn	LR8555-50GQ	LVR-IC	LDO, 5.0V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G0	fn	LR8555-50GRA	LVR-IC	LDO, 5.0V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G0	fn	LR8555-50GRB	LVR-IC	LDO, 5.0V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G0	fp	BL8555-20GQ	LVR-IC	LDO, 2.0V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G0	fp	BL8555-20GRA	LVR-IC	LDO, 2.0V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G0	fp	BL8555-20GRB	LVR-IC	LDO, 2.0V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G0	fp	LR8555-20GQ	LVR-IC	LDO, 2.0V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G0	fp	LR8555-20GRA	LVR-IC	LDO, 2.0V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G0	fp	LR8555-20GRB	LVR-IC	LDO, 2.0V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G001	-	RP103Q122B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G002	-	RP103Q132B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G003	-	RP103Q152B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G004	-	RP103Q182B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G005	-	RP103Q182B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G006	-	RP103Q192B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G007	-	RP103Q202B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G008	-	RP103Q212B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G009	-	RP103Q232B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G010	-	RP103Q252B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G011	-	RP103Q262B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G012	-	RP103Q272B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G013	-	RP103Q282B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G014	-	RP103Q282B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G015	-	RP103Q292B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G016	-	RP103Q302B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G017	-	RP103Q312B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G018	-	RP103Q322B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G019	-	RP103Q332B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
g02	-	XC7SET02GV	CMOS-Log	2-input NOR gate	SOT753	28	Log2	6a	Nxp
G020	-	RP103Q292B5	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G021	-	RP103Q222B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G022	-	RP103Q162B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G023	-	RP103Q142B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G024	-	RP103Q172B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
G025	-	RP103Q242B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SC-88A	28xm	VR4	6ma	Ric
g04	-	XC7SET04GV	CMOS-Log	Inverter	SOT753	28	Log6	6a	Nxp
g08	-	XC7SET08GV	CMOS-Log	2-input AND gate	SOT753	28	Log3	6a	Nxp
G09	ed	XC9217A096M	DC-DC-IC	PWM-PWM/PFM st-dwn, 0.9V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G0A	-	R1118N291B	LVR-IC	2.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G0B	-	R1118N301B	LVR-IC	3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G0C	-	R1118N311B	LVR-IC	3.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G0D	-	R1118N321B	LVR-IC	3.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G0E	-	R1118N331B	LVR-IC	3.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G0F	-	R1118N341B	LVR-IC	3.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G0G	-	R1118N351B	LVR-IC	3.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G0H	-	R1118N361B	LVR-IC	3.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G0J	-	R1118N371B	LVR-IC	3.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G0K	-	R1118N381B	LVR-IC	3.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G0L	-	R1118N391B	LVR-IC	3.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G0M	-	R1118N401B	LVR-IC	4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G0M	ed	XC9217A09CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 0.9V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G0N	-	R1118N411B	LVR-IC	4.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G0P	-	R1118N421B	LVR-IC	4.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
g1	-	BD46E235G-M	Vdet-IC	2.3V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
G1	-	BU28TD3WG	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
G1	-	ELM89312B	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
G1	-	FP6801-24NS5P	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Fit
G1	-	R1111N311B	LVR-IC	LDO, Low noise, 3.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G1	-	Si91844DT-27	LVR-IC	LDO, LN, 2.7V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
G1	-	TC7SET00F	CMOS-Log	2-input NAND gate	SSOP-5	28	Log1	6a	Tos
G1	-	TC7SET00FU	CMOS-Log	2-input NAND gate	SC-70-5	28	Log1	6a	Tos
G1	eu	BL8555-21SQ	LVR-IC	LDO, 2.1V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G1	eu	BL8555-21SRA	LVR-IC	LDO, 2.1V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G1	eu	BL8555-21SRB	LVR-IC	LDO, 2.1V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G1	eu	LR8555-21SQ	LVR-IC	LDO, 2.1V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G1	eu	LR8555-21SRA	LVR-IC	LDO, 2.1V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G1	eu	LR8555-21SRB	LVR-IC	LDO, 2.1V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G1	fg	BL8555-31SQ	LVR-IC	LDO, 3.1V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G1	fg	BL8555-31SRA	LVR-IC	LDO, 3.1V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G1	fg	BL8555-31SRB	LVR-IC	LDO, 3.1V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G1	fg	LR8555-31SQ	LVR-IC	LDO, 3.1V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G1	fg	LR8555-31SRA	LVR-IC	LDO, 3.1V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G1	fg	LR8555-31SRB	LVR-IC	LDO, 3.1V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G1	fh	BL8555-41SQ	LVR-IC	LDO, 4.1V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G1	fh	BL8555-41SRA	LVR-IC	LDO, 4.1V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G1	fh	BL8555-41SRB	LVR-IC	LDO, 4.1V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G1	fh	LR8555-41SQ	LVR-IC	LDO, 4.1V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G1	fh	LR8555-41SRA	LVR-IC	LDO, 4.1V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G1	fh	LR8555-41SRB	LVR-IC	LDO, 4.1V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G1	fk	BL8555-31GQ	LVR-IC	LDO, 3.1V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G1	fk	BL8555-31GRA	LVR-IC	LDO, 3.1V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G1	fk	BL8555-31GRB	LVR-IC	LDO, 3.1V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G1	fk	LR8555-31GQ	LVR-IC	LDO, 3.1V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G1	fk	LR8555-31GRA	LVR-IC	LDO, 3.1V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G1	fk	LR8555-31GRB	LVR-IC	LDO, 3.1V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G1	fm	BL8555-41GQ	LVR-IC	LDO, 4.1V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G1	fm	BL8555-41GRA	LVR-IC	LDO, 4.1V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G1	fm	BL8555-41GRB	LVR-IC	LDO, 4.1V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G1	fm	LR8555-41GQ	LVR-IC	LDO, 4.1V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G1	fm	LR8555-41GRA	LVR-IC	LDO, 4.1V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G1	fm	LR8555-41GRB	LVR-IC	LDO, 4.1V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G1	fp	BL8555-21GQ	LVR-IC	LDO, 2.1V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G1	fp	BL8555-21GRA	LVR-IC	LDO, 2.1V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G1	fp	BL8555-21GRB	LVR-IC	LDO, 2.1V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G1	fp	LR8555-21GQ	LVR-IC	LDO, 2.1V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G1	fp	LR8555-21GRA	LVR-IC	LDO, 2.1V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G1	fp	LR8555-21GRB	LVR-IC	LDO, 2.1V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G10	-	R1224N102G	DC-DC-IC	PWM step-down, 1V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
G10	ed	XC9217A106M	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.0V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G11	ed	XC9217A116M	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.1V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G12	-	R1224N122G	DC-DC-IC	PWM step-down, 1.2V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
G12	ed	XC9217A126M	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G13	ed	XC9217A136M	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.3V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
g14	-	XC7SET14GV	CMOS-Log	Inverting Schmitt-trigger	SOT753	28	Log7	6a	Nxp
G14	ed	XC9217A146M	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.4V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G15	-	R1224N152G	DC-DC-IC	PWM step-down, 1.5V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
G15	ed	XC9217A156M	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.5V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G16	ed	XC9217A166M	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.6V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G17	ed	XC9217A176M	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.7V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G18	-	R1224N182G	DC-DC-IC	PWM step-down, 1.8V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
G18	ed	XC9217A186M	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.8V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G19	ed	XC9217A196M	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.9V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G1A	-	R1118N291D	LVR-IC	2.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
G1A	ed	XC9217A10CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.0V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G1B	-	R1118N301D	LVR-IC	3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
G1B	ed	XC9217A11CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.1V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G1C	-	R1118N311D	LVR-IC	3.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
G1C	ed	XC9217A12CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G1D	-	R1118N321D	LVR-IC	3.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
G1D	ed	XC9217A13CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.3V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G1E	-	R1118N331D	LVR-IC	3.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
G1E	ed	XC9217A14CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.4V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G1F	-	R1118N341D	LVR-IC	3.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
G1F	ed	XC9217A15CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.5V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G1G	-	R1118N351D	LVR-IC	3.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
G1H	-	R1118N361D	LVR-IC	3.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
G1H	ed	XC9217A16CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.6V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G1J	-	R1118N371D	LVR-IC	3.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
G1K	-	R1118N381D	LVR-IC	3.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
G1K	ed	XC9217A17CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.7V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G1L	-	R1118N391D	LVR-IC	3.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
G1L	ed	XC9217A18CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.8V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G1M	-	R1118N401D	LVR-IC	4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G1M	ed	XC9217A19CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.9V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G1N	-	R1118N411D	LVR-IC	4.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
G1P	-	R1118N421D	LVR-IC	4.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
G1R	-	AP2121AK-1.3TRG1	LVR-IC	LDO, 1.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
G1T	-	AP2121AK-1.2TRG1	LVR-IC	LDO, 1.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
G1U	-	AP2121AK-1.8TRG1	LVR-IC	LDO, 1.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
G1V	-	AP2121AK-2.5TRG1	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
G1W	-	AP2121AK-2.8TRG1	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
G1X	-	AP2121AK-3.0TRG1	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
G1Y	-	AP2121AK-3.3TRG1	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
G1Z	-	AP2121AK-1.5TRG1	LVR-IC	LDO, 1.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
g2	-	BD46E245G-M	Vdet-IC	2.4V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
G2	-	BL8555-12GQ	LVR-IC	LDO, 1.2V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G2	-	BL8555-12GRA	LVR-IC	LDO, 1.2V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G2	-	BL8555-12GRB	LVR-IC	LDO, 1.2V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G2	-	BU2JTD3WG	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
G2	-	ELM89322B	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
G2	-	FP6801-27NS5P	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Fit
G2	-	LR8555-12GQ	LVR-IC	LDO, 1.2V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G2	-	LR8555-12GRA	LVR-IC	LDO, 1.2V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G2	-	LR8555-12GRB	LVR-IC	LDO, 1.2V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G2	-	R1111N321B	LVR-IC	LDO, Low noise, 3.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G2	-	Si91844DT-28	LVR-IC	LDO, LN, 2.8V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
G2	-	TC7SET08F	CMOS-Log	2-input AND gate	SSOP-5	28	Log3	6a	Tos
G2	-	TC7SET08FU	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6a	Tos
G2	ea	BL8555-12SQ	LVR-IC	LDO, 1.2V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G2	ea	BL8555-12SRA	LVR-IC	LDO, 1.2V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G2	ea	BL8555-12SRB	LVR-IC	LDO, 1.2V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G2	ea	LR8555-12SQ	LVR-IC	LDO, 1.2V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G2	ea	LR8555-12SRA	LVR-IC	LDO, 1.2V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G2	ea	LR8555-12SRB	LVR-IC	LDO, 1.2V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G2	eu	BL8555-22SQ	LVR-IC	LDO, 2.2V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G2	eu	BL8555-22SRA	LVR-IC	LDO, 2.2V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G2	eu	BL8555-22SRB	LVR-IC	LDO, 2.2V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G2	eu	LR8555-22SQ	LVR-IC	LDO, 2.2V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G2	eu	LR8555-22SRA	LVR-IC	LDO, 2.2V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G2	eu	LR8555-22SRB	LVR-IC	LDO, 2.2V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G2	fg	BL8555-32SQ	LVR-IC	LDO, 3.2V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G2	fg	BL8555-32SRA	LVR-IC	LDO, 3.2V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G2	fg	BL8555-32SRB	LVR-IC	LDO, 3.2V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G2	fg	LR8555-32SQ	LVR-IC	LDO, 3.2V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G2	fg	LR8555-32SRA	LVR-IC	LDO, 3.2V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G2	fg	LR8555-32SRB	LVR-IC	LDO, 3.2V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G2	fh	BL8555-42SQ	LVR-IC	LDO, 4.2V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G2	fh	BL8555-42SRA	LVR-IC	LDO, 4.2V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G2	fh	BL8555-42SRB	LVR-IC	LDO, 4.2V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G2	fh	LR8555-42SQ	LVR-IC	LDO, 4.2V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G2	fh	LR8555-42SRA	LVR-IC	LDO, 4.2V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G2	fh	LR8555-42SRB	LVR-IC	LDO, 4.2V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G2	fk	BL8555-32GQ	LVR-IC	LDO, 3.2V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G2	fk	BL8555-32GRA	LVR-IC	LDO, 3.2V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G2	fk	BL8555-32GRB	LVR-IC	LDO, 3.2V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G2	fk	LR8555-32GQ	LVR-IC	LDO, 3.2V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G2	fk	LR8555-32GRA	LVR-IC	LDO, 3.2V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G2	fk	LR8555-32GRB	LVR-IC	LDO, 3.2V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G2	fm	BL8555-42GQ	LVR-IC	LDO, 4.2V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G2	fm	BL8555-42GRA	LVR-IC	LDO, 4.2V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G2	fm	BL8555-42GRB	LVR-IC	LDO, 4.2V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G2	fm	LR8555-42GQ	LVR-IC	LDO, 4.2V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G2	fm	LR8555-42GRA	LVR-IC	LDO, 4.2V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G2	fm	LR8555-42GRB	LVR-IC	LDO, 4.2V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G2	fp	BL8555-22GQ	LVR-IC	LDO, 2.2V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G2	fp	BL8555-22GRA	LVR-IC	LDO, 2.2V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G2	fp	BL8555-22GRB	LVR-IC	LDO, 2.2V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G2	fp	LR8555-22GQ	LVR-IC	LDO, 2.2V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G2	fp	LR8555-22GRA	LVR-IC	LDO, 2.2V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G2	fp	LR8555-22GRB	LVR-IC	LDO, 2.2V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G20	ed	XC9217A206M	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.0V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G21	ed	XC9217A216M	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.1V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G22	ed	XC9217A226M	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.2V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G23	ed	XC9217A236M	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.3V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G24	ed	XC9217A246M	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.4V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
g25	-	XC7SET125GV	CMOS-Log	Bus buffer gate with 3-state output	SOT753	28	Log14	6a	Nxp
G25	-	R1224N252G	DC-DC-IC	PWM step-down, 2.5V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
G25	ed	XC9217A256M	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.5V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G26	ed	XC9217A266M	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.6V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G27	ed	XC9217A276M	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.7V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G28	ed	XC9217A286M	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.8V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G29	ed	XC9217A296M	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.9V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G2A	ed	XC9217A20CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.0V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G2B	ed	XC9217A21CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.1V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G2C	ed	XC9217A22CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.2V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G2D	ed	XC9217A23CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.3V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G2E	ed	XC9217A24CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.4V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G2F	ed	XC9217A25CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.5V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G2H	ed	XC9217A26CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.6V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G2K	ed	XC9217A27CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.7V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G2L	ed	XC9217A28CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.8V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G2M	ed	XC9217A29CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.9V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
g3	-	BD46E255G-M	Vdet-IC	2.5V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
G3	-	BL8555-13GQ	LVR-IC	LDO, 1.3V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G3	-	BL8555-13GRA	LVR-IC	LDO, 1.3V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G3	-	BL8555-13GRB	LVR-IC	LDO, 1.3V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G3	-	BU29TD3WG	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
G3	-	ELM89332B	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
G3	-	LR8555-13GQ	LVR-IC	LDO, 1.3V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G3	-	LR8555-13GRA	LVR-IC	LDO, 1.3V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G3	-	LR8555-13GRB	LVR-IC	LDO, 1.3V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G3	-	MC78PC33N	LVR-IC	LDO, LN, +CE, 3.3V±2.5%, 100mA	SOT-23-5	28cx	VR4	6b	Ons
G3	-	R1111N331B	LVR-IC	LDO, Low noise, 3.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G3	-	Si91844DT-285	LVR-IC	LDO, LN, 2.85V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
G3	-	TC7SET02F	CMOS-Log	2-input NOR gate	SSOP-5	28	Log2	6a	Tos
G3	-	TC7SET02FU	CMOS-Log	2-input NOR gate	SC-70-5	28	Log2	6a	Tos
G3	ea	BL8555-13SQ	LVR-IC	LDO, 1.3V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G3	ea	BL8555-13SRA	LVR-IC	LDO, 1.3V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G3	ea	BL8555-13SRB	LVR-IC	LDO, 1.3V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G3	ea	LR8555-13SQ	LVR-IC	LDO, 1.3V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G3	ea	LR8555-13SRA	LVR-IC	LDO, 1.3V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G3	ea	LR8555-13SRB	LVR-IC	LDO, 1.3V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G3	eu	BL8555-23SQ	LVR-IC	LDO, 2.3V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G3	eu	BL8555-23SRA	LVR-IC	LDO, 2.3V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G3	eu	BL8555-23SRB	LVR-IC	LDO, 2.3V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G3	eu	LR8555-23SQ	LVR-IC	LDO, 2.3V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G3	eu	LR8555-23SRA	LVR-IC	LDO, 2.3V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G3	eu	LR8555-23SRB	LVR-IC	LDO, 2.3V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G3	fg	BL8555-33SQ	LVR-IC	LDO, 3.3V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G3	fg	BL8555-33SRA	LVR-IC	LDO, 3.3V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G3	fg	BL8555-33SRB	LVR-IC	LDO, 3.3V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G3	fg	LR8555-33SQ	LVR-IC	LDO, 3.3V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G3	fg	LR8555-33SRA	LVR-IC	LDO, 3.3V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G3	fg	LR8555-33SRB	LVR-IC	LDO, 3.3V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G3	fh	BL8555-43SQ	LVR-IC	LDO, 4.3V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G3	fh	BL8555-43SRA	LVR-IC	LDO, 4.3V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G3	fh	BL8555-43SRB	LVR-IC	LDO, 4.3V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G3	fh	LR8555-43SQ	LVR-IC	LDO, 4.3V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G3	fh	LR8555-43SRA	LVR-IC	LDO, 4.3V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G3	fh	LR8555-43SRB	LVR-IC	LDO, 4.3V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G3	fk	BL8555-33GQ	LVR-IC	LDO, 3.3V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G3	fk	BL8555-33GRA	LVR-IC	LDO, 3.3V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G3	fk	BL8555-33GRB	LVR-IC	LDO, 3.3V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G3	fk	LR8555-33GQ	LVR-IC	LDO, 3.3V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G3	fk	LR8555-33GRA	LVR-IC	LDO, 3.3V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G3	fk	LR8555-33GRB	LVR-IC	LDO, 3.3V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G3	fm	BL8555-43GQ	LVR-IC	LDO, 4.3V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G3	fm	BL8555-43GRA	LVR-IC	LDO, 4.3V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G3	fm	BL8555-43GRB	LVR-IC	LDO, 4.3V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G3	fm	LR8555-43GQ	LVR-IC	LDO, 4.3V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G3	fm	LR8555-43GRA	LVR-IC	LDO, 4.3V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G3	fm	LR8555-43GRB	LVR-IC	LDO, 4.3V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G3	fp	BL8555-23GQ	LVR-IC	LDO, 2.3V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G3	fp	BL8555-23GRA	LVR-IC	LDO, 2.3V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G3	fp	BL8555-23GRB	LVR-IC	LDO, 2.3V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G3	fp	LR8555-23GQ	LVR-IC	LDO, 2.3V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G3	fp	LR8555-23GRA	LVR-IC	LDO, 2.3V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G3	fp	LR8555-23GRB	LVR-IC	LDO, 2.3V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G30	-	R1224N302G	DC-DC-IC	PWM step-down, 3V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
G30	ed	XC9217A306M	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.0V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G31	ed	XC9217A316M	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.1V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
g32	-	XC7SET32GV	CMOS-Log	2-input OR gate	SOT753	28	Log4	6a	Nxp
G32	ed	XC9217A326M	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.2V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G33	-	R1224N332G	DC-DC-IC	PWM step-down, 3.3V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
G33	ed	XC9217A336M	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.3V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G34	ed	XC9217A346M	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.4V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G35	ed	XC9217A356M	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.5V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G36	ed	XC9217A366M	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.6V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G37	ed	XC9217A376M	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.7V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G38	ed	XC9217A386M	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.8V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G39	ed	XC9217A396M	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.9V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G3A	ed	XC9217A30CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.0V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G3B	ed	XC9217A31CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.1V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G3C	ed	XC9217A32CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.2V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G3D	ed	XC9217A33CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.3V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G3E	ed	XC9217A34CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.4V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G3F	ed	XC9217A35CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.5V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G3H	ed	XC9217A36CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.6V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G3K	ed	XC9217A37CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.7V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G3L	ed	XC9217A38CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.8V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G3M	ed	XC9217A39CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.9V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G3Q	-	AP2111K-ADJG1	LVR-IC	LDO, Adjust. 1.2..3.3V±1.5%, 600mA, +CE	SOT-23-5	28s9	VR5	6a	Bcd
G3Z	-	AP2121AK-3.2TRG1	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6k	Bcd
g4	-	BD46E265G-M	Vdet-IC	2.6V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
G4	-	BL8555-14GQ	LVR-IC	LDO, 1.4V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G4	-	BL8555-14GRA	LVR-IC	LDO, 1.4V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G4	-	BL8555-14GRB	LVR-IC	LDO, 1.4V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G4	-	BU30TD3WG	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
G4	-	ELM89342B	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
G4	-	LR8555-14GQ	LVR-IC	LDO, 1.4V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G4	-	LR8555-14GRA	LVR-IC	LDO, 1.4V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G4	-	LR8555-14GRB	LVR-IC	LDO, 1.4V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G4	-	R1111N341B	LVR-IC	LDO, Low noise, 3.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G4	-	Si91844DT-29	LVR-IC	LDO, LN, 2.9V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
G4	-	TC7SET32F	CMOS-Log	2-input OR gate	SSOP-5	28	Log4	6a	Tos
G4	-	TC7SET32FU	CMOS-Log	2-input OR gate	SC-70-5	28	Log4	6a	Tos
G4	ea	BL8555-14SQ	LVR-IC	LDO, 1.4V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G4	ea	BL8555-14SRA	LVR-IC	LDO, 1.4V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G4	ea	BL8555-14SRB	LVR-IC	LDO, 1.4V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G4	ea	LR8555-14SQ	LVR-IC	LDO, 1.4V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G4	ea	LR8555-14SRA	LVR-IC	LDO, 1.4V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G4	ea	LR8555-14SRB	LVR-IC	LDO, 1.4V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G4	eu	BL8555-24SQ	LVR-IC	LDO, 2.4V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G4	eu	BL8555-24SRA	LVR-IC	LDO, 2.4V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G4	eu	BL8555-24SRB	LVR-IC	LDO, 2.4V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G4	eu	LR8555-24SQ	LVR-IC	LDO, 2.4V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G4	eu	LR8555-24SRA	LVR-IC	LDO, 2.4V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G4	eu	LR8555-24SRB	LVR-IC	LDO, 2.4V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G4	fg	BL8555-34SQ	LVR-IC	LDO, 3.4V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G4	fg	BL8555-34SRA	LVR-IC	LDO, 3.4V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G4	fg	BL8555-34SRB	LVR-IC	LDO, 3.4V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G4	fg	LR8555-34SQ	LVR-IC	LDO, 3.4V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G4	fg	LR8555-34SRA	LVR-IC	LDO, 3.4V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G4	fg	LR8555-34SRB	LVR-IC	LDO, 3.4V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G4	fh	BL8555-44SQ	LVR-IC	LDO, 4.4V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G4	fh	BL8555-44SRA	LVR-IC	LDO, 4.4V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G4	fh	BL8555-44SRB	LVR-IC	LDO, 4.4V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G4	fh	LR8555-44SQ	LVR-IC	LDO, 4.4V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G4	fh	LR8555-44SRA	LVR-IC	LDO, 4.4V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G4	fh	LR8555-44SRB	LVR-IC	LDO, 4.4V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G4	fk	BL8555-34GQ	LVR-IC	LDO, 3.4V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G4	fk	BL8555-34GRB	LVR-IC	LDO, 3.4V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G4	fk	BL8555-34PGA	LVR-IC	LDO, 3.4V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G4	fk	LR8555-34GQ	LVR-IC	LDO, 3.4V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G4	fk	LR8555-34GRB	LVR-IC	LDO, 3.4V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G4	fk	LR8555-34PGA	LVR-IC	LDO, 3.4V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G4	fm	BL8555-44GQ	LVR-IC	LDO, 4.4V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G4	fm	BL8555-44GRA	LVR-IC	LDO, 4.4V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G4	fm	BL8555-44GRB	LVR-IC	LDO, 4.4V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G4	fm	LR8555-44GQ	LVR-IC	LDO, 4.4V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G4	fm	LR8555-44GRA	LVR-IC	LDO, 4.4V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G4	fm	LR8555-44GRB	LVR-IC	LDO, 4.4V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G4	fp	BL8555-24GQ	LVR-IC	LDO, 2.4V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G4	fp	BL8555-24GRA	LVR-IC	LDO, 2.4V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G4	fp	BL8555-24GRB	LVR-IC	LDO, 2.4V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G4	fp	LR8555-24GQ	LVR-IC	LDO, 2.4V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G4	fp	LR8555-24GRA	LVR-IC	LDO, 2.4V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G4	fp	LR8555-24GRB	LVR-IC	LDO, 2.4V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G40	ed	XC9217A406M	DC-DC-IC	PWM-PWM/PFM st-dwn, 4.0V±2%, 500mA, 600KHz, +CE	SOT-25	28dc4	DC1	6g	Tor
G4A	ed	XC9217A40CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 4.0V±2%, 500mA, 1.2MHz, +CE	SOT-25	28dc4	DC1	6g	Tor
g5	-	BD46E275G-M	Vdet-IC	2.7V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
G5	-	BL8555-15GQ	LVR-IC	LDO, 1.5V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G5	-	BL8555-15GRA	LVR-IC	LDO, 1.5V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G5	-	BL8555-15GRB	LVR-IC	LDO, 1.5V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G5	-	BU31TD3WG	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
G5	-	ELM89352B	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
G5	-	LR8555-15GQ	LVR-IC	LDO, 1.5V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G5	-	LR8555-15GRA	LVR-IC	LDO, 1.5V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G5	-	LR8555-15GRB	LVR-IC	LDO, 1.5V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G5	-	R1111N351B	LVR-IC	LDO, Low noise, 3.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G5	-	Si91844DT-30	LVR-IC	LDO, LN, 3.0V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
G5	-	TC7SET04F	CMOS-Log	Inverter	SSOP-5	28	Log6	6a	Tos
G5	-	TC7SET04FU	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	Tos
G5	ea	BL8555-15SQ	LVR-IC	LDO, 1.5V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G5	ea	BL8555-15SRA	LVR-IC	LDO, 1.5V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G5	ea	BL8555-15SRB	LVR-IC	LDO, 1.5V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G5	ea	LR8555-15SQ	LVR-IC	LDO, 1.5V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G5	ea	LR8555-15SRA	LVR-IC	LDO, 1.5V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G5	ea	LR8555-15SRB	LVR-IC	LDO, 1.5V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G5	eu	BL8555-25SQ	LVR-IC	LDO, 2.5V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G5	eu	BL8555-25SRA	LVR-IC	LDO, 2.5V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G5	eu	BL8555-25SRB	LVR-IC	LDO, 2.5V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G5	eu	LR8555-25SQ	LVR-IC	LDO, 2.5V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G5	eu	LR8555-25SRA	LVR-IC	LDO, 2.5V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G5	eu	LR8555-25SRB	LVR-IC	LDO, 2.5V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G5	fg	BL8555-35SQ	LVR-IC	LDO, 3.5V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G5	fg	BL8555-35SRA	LVR-IC	LDO, 3.5V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G5	fg	BL8555-35SRB	LVR-IC	LDO, 3.5V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G5	fg	LR8555-35SQ	LVR-IC	LDO, 3.5V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G5	fg	LR8555-35SRA	LVR-IC	LDO, 3.5V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G5	fg	LR8555-35SRB	LVR-IC	LDO, 3.5V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G5	fh	BL8555-45SQ	LVR-IC	LDO, 4.5V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G5	fh	BL8555-45SRA	LVR-IC	LDO, 4.5V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G5	fh	BL8555-45SRB	LVR-IC	LDO, 4.5V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G5	fh	LR8555-45SQ	LVR-IC	LDO, 4.5V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G5	fh	LR8555-45SRA	LVR-IC	LDO, 4.5V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G5	fh	LR8555-45SRB	LVR-IC	LDO, 4.5V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G5	fk	BL8555-35GQ	LVR-IC	LDO, 3.5V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G5	fk	BL8555-35GRA	LVR-IC	LDO, 3.5V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G5	fk	BL8555-35GRB	LVR-IC	LDO, 3.5V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G5	fk	LR8555-35GQ	LVR-IC	LDO, 3.5V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G5	fk	LR8555-35GRA	LVR-IC	LDO, 3.5V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G5	fk	LR8555-35GRB	LVR-IC	LDO, 3.5V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G5	fm	BL8555-45GQ	LVR-IC	LDO, 4.5V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G5	fm	BL8555-45GRA	LVR-IC	LDO, 4.5V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G5	fm	BL8555-45GRB	LVR-IC	LDO, 4.5V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G5	fm	LR8555-45GQ	LVR-IC	LDO, 4.5V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G5	fm	LR8555-45GRA	LVR-IC	LDO, 4.5V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G5	fm	LR8555-45GRB	LVR-IC	LDO, 4.5V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G5	fp	BL8555-25GQ	LVR-IC	LDO, 2.5V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G5	fp	BL8555-25GRA	LVR-IC	LDO, 2.5V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G5	fp	BL8555-25GRB	LVR-IC	LDO, 2.5V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G5	fp	LR8555-25GQ	LVR-IC	LDO, 2.5V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G5	fp	LR8555-25GRA	LVR-IC	LDO, 2.5V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G5	fp	LR8555-25GRB	LVR-IC	LDO, 2.5V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G50	-	R1224N502G	DC-DC-IC	PWM step-down, 5V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
G55	-	R1224N552G	DC-DC-IC	PWM step-down, 5.5V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
g6	-	BD46E285G-M	Vdet-IC	2.8V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
G6	-	BL8555-16GQ	LVR-IC	LDO, 1.6V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G6	-	BL8555-16GRA	LVR-IC	LDO, 1.6V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G6	-	BL8555-16GRB	LVR-IC	LDO, 1.6V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G6	-	BU32TD3WG	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
G6	-	ELM89362B	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
G6	-	LR8555-16GQ	LVR-IC	LDO, 1.6V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G6	-	LR8555-16GRA	LVR-IC	LDO, 1.6V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G6	-	LR8555-16GRB	LVR-IC	LDO, 1.6V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G6	-	R1111N361B	LVR-IC	LDO, Low noise, 3.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G6	-	Si91844DT-33	LVR-IC	LDO, LN, 3.3V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
G6	ea	BL8555-16SQ	LVR-IC	LDO, 1.6V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G6	ea	BL8555-16SRA	LVR-IC	LDO, 1.6V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G6	ea	BL8555-16SRB	LVR-IC	LDO, 1.6V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G6	ea	LR8555-16SQ	LVR-IC	LDO, 1.6V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G6	ea	LR8555-16SRA	LVR-IC	LDO, 1.6V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G6	ea	LR8555-16SRB	LVR-IC	LDO, 1.6V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G6	eu	BL8555-26SQ	LVR-IC	LDO, 2.6V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G6	eu	BL8555-26SRA	LVR-IC	LDO, 2.6V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G6	eu	BL8555-26SRB	LVR-IC	LDO, 2.6V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G6	eu	LR8555-26SQ	LVR-IC	LDO, 2.6V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G6	eu	LR8555-26SRA	LVR-IC	LDO, 2.6V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G6	eu	LR8555-26SRB	LVR-IC	LDO, 2.6V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G6	fg	BL8555-36SQ	LVR-IC	LDO, 3.6V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G6	fg	BL8555-36SRA	LVR-IC	LDO, 3.6V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G6	fg	BL8555-36SRB	LVR-IC	LDO, 3.6V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G6	fg	LR8555-36SQ	LVR-IC	LDO, 3.6V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G6	fg	LR8555-36SRA	LVR-IC	LDO, 3.6V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G6	fg	LR8555-36SRB	LVR-IC	LDO, 3.6V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G6	fh	BL8555-46SQ	LVR-IC	LDO, 4.6V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G6	fh	BL8555-46SRA	LVR-IC	LDO, 4.6V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G6	fh	BL8555-46SRB	LVR-IC	LDO, 4.6V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G6	fh	LR8555-46SQ	LVR-IC	LDO, 4.6V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G6	fh	LR8555-46SRA	LVR-IC	LDO, 4.6V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G6	fh	LR8555-46SRB	LVR-IC	LDO, 4.6V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G6	fk	BL8555-36GQ	LVR-IC	LDO, 3.6V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G6	fk	BL8555-36GRA	LVR-IC	LDO, 3.6V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G6	fk	BL8555-36GRB	LVR-IC	LDO, 3.6V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G6	fk	LR8555-36GQ	LVR-IC	LDO, 3.6V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G6	fk	LR8555-36GRA	LVR-IC	LDO, 3.6V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G6	fk	LR8555-36GRB	LVR-IC	LDO, 3.6V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G6	fm	BL8555-46GQ	LVR-IC	LDO, 4.6V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G6	fm	BL8555-46GRA	LVR-IC	LDO, 4.6V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G6	fm	BL8555-46GRB	LVR-IC	LDO, 4.6V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G6	fm	LR8555-46GQ	LVR-IC	LDO, 4.6V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G6	fm	LR8555-46GRA	LVR-IC	LDO, 4.6V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G6	fm	LR8555-46GRB	LVR-IC	LDO, 4.6V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G6	fp	BL8555-26GQ	LVR-IC	LDO, 2.6V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G6	fp	BL8555-26GRA	LVR-IC	LDO, 2.6V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G6	fp	BL8555-26GRB	LVR-IC	LDO, 2.6V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G6	fp	LR8555-26GQ	LVR-IC	LDO, 2.6V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G6	fp	LR8555-26GRA	LVR-IC	LDO, 2.6V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G6	fp	LR8555-26GRB	LVR-IC	LDO, 2.6V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G60	-	R1224N602G	DC-DC-IC	PWM step-down, 6V±2%, 300kHz	SOT-23-5	28ud	DC7	6g	Ric
G60	-	S-80930CLMC-G60T2	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G61	-	S-80931CLMC-G61T2	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G62	-	S-80932CLMC-G62T2	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G63	-	S-80933CLMC-G63T2	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G64	-	S-80934CLMC-G64T2	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G65	-	S-80935CLMC-G65T2	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G66	-	S-80936CLMC-G66T2	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G67	-	S-80937CLMC-G67T2	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G68	-	S-80938CLMC-G68T2	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G69	-	S-80939CLMC-G69T2	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G6H	-	S-80913CLMC-G6HT2	Vdet-IC	1.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G6J	-	S-80914CLMC-G6JT2	Vdet-IC	1.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G6K	-	S-80915CLMC-G6KT2	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G6L	-	S-80916CLMC-G6LT2	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G6M	-	S-80917CLMC-G6MT2	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G6N	-	S-80918CLMC-G6NT2	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G6P	-	S-80919CLMC-G6PT2	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G6Q	-	S-80920CLMC-G6QT2	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G6R	-	S-80921CLMC-G6RT2	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G6S	-	S-80922CLMC-G6ST2	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G6T	-	S-80923CLMC-G6TT2	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G6U	-	S-80924CLMC-G6UT2	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G6V	-	S-80925CLMC-G6VT2	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G6W	-	S-80926CLMC-G6WT2	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G6X	-	S-80927CLMC-G6XT2	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G6Y	-	S-80928CLMC-G6YT2	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G6Z	-	S-80929CLMC-G6ZT2	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
g7	-	BD46E295G-M	Vdet-IC	2.9V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
G7	-	BL8555-17GQ	LVR-IC	LDO, 1.7V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G7	-	BL8555-17GRA	LVR-IC	LDO, 1.7V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G7	-	BL8555-17GRB	LVR-IC	LDO, 1.7V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G7	-	BU33TD3WG	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
G7	-	ELM89372B	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
G7	-	LR8555-17GQ	LVR-IC	LDO, 1.7V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G7	-	LR8555-17GRA	LVR-IC	LDO, 1.7V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G7	-	LR8555-17GRB	LVR-IC	LDO, 1.7V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G7	-	R1111N371B	LVR-IC	LDO, Low noise, 3.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G7	-	Si91844DT-35	LVR-IC	LDO, LN, 3.5V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
G7	ea	BL8555-17SQ	LVR-IC	LDO, 1.7V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G7	ea	BL8555-17SRA	LVR-IC	LDO, 1.7V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G7	ea	BL8555-17SRB	LVR-IC	LDO, 1.7V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G7	ea	LR8555-17SQ	LVR-IC	LDO, 1.7V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G7	ea	LR8555-17SRA	LVR-IC	LDO, 1.7V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G7	ea	LR8555-17SRB	LVR-IC	LDO, 1.7V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G7	eu	BL8555-27SQ	LVR-IC	LDO, 2.7V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G7	eu	BL8555-27SRA	LVR-IC	LDO, 2.7V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G7	eu	BL8555-27SRB	LVR-IC	LDO, 2.7V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G7	eu	LR8555-27SQ	LVR-IC	LDO, 2.7V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G7	eu	LR8555-27SRA	LVR-IC	LDO, 2.7V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G7	eu	LR8555-27SRB	LVR-IC	LDO, 2.7V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G7	fg	BL8555-37SQ	LVR-IC	LDO, 3.7V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G7	fg	BL8555-37SRA	LVR-IC	LDO, 3.7V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G7	fg	BL8555-37SRB	LVR-IC	LDO, 3.7V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G7	fg	LR8555-37SQ	LVR-IC	LDO, 3.7V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G7	fg	LR8555-37SRA	LVR-IC	LDO, 3.7V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G7	fg	LR8555-37SRB	LVR-IC	LDO, 3.7V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G7	fh	BL8555-47SQ	LVR-IC	LDO, 4.7V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G7	fh	BL8555-47SRA	LVR-IC	LDO, 4.7V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G7	fh	BL8555-47SRB	LVR-IC	LDO, 4.7V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G7	fh	LR8555-47SQ	LVR-IC	LDO, 4.7V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G7	fh	LR8555-47SRA	LVR-IC	LDO, 4.7V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G7	fh	LR8555-47SRB	LVR-IC	LDO, 4.7V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G7	fk	BL8555-37GQ	LVR-IC	LDO, 3.7V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G7	fk	BL8555-37GRA	LVR-IC	LDO, 3.7V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G7	fk	BL8555-37GRB	LVR-IC	LDO, 3.7V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G7	fk	LR8555-37GQ	LVR-IC	LDO, 3.7V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G7	fk	LR8555-37GRA	LVR-IC	LDO, 3.7V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G7	fk	LR8555-37GRB	LVR-IC	LDO, 3.7V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G7	fm	BL8555-47GQ	LVR-IC	LDO, 4.7V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G7	fm	BL8555-47GRA	LVR-IC	LDO, 4.7V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G7	fm	BL8555-47GRB	LVR-IC	LDO, 4.7V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G7	fm	LR8555-47GQ	LVR-IC	LDO, 4.7V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G7	fm	LR8555-47GRA	LVR-IC	LDO, 4.7V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G7	fm	LR8555-47GRB	LVR-IC	LDO, 4.7V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G7	fp	BL8555-27GQ	LVR-IC	LDO, 2.7V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G7	fp	BL8555-27GRA	LVR-IC	LDO, 2.7V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G7	fp	BL8555-27GRB	LVR-IC	LDO, 2.7V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G7	fp	LR8555-27GQ	LVR-IC	LDO, 2.7V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G7	fp	LR8555-27GRA	LVR-IC	LDO, 2.7V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G7	fp	LR8555-27GRB	LVR-IC	LDO, 2.7V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G7A	-	S-80940CLMC-G7AT2	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7B	-	S-80941CLMC-G7BT2	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G7C	-	S-80942CLMC-G7CT2	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7D	-	S-80943CLMC-G7DT2	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7E	-	S-80944CLMC-G7ET2	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7F	-	S-80945CLMC-G7FT2	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7G	-	S-80946CLMC-G7GT2	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7H	-	S-80947CLMC-G7HT2	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7J	-	S-80948CLMC-G7JT2	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7K	-	S-80949CLMC-G7KT2	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7L	-	S-80950CLMC-G7LT2	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7M	-	S-80951CLMC-G7MT2	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7N	-	S-80952CLMC-G7NT2	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7P	-	S-80953CLMC-G7PT2	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7Q	-	S-80954CLMC-G7QT2	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7R	-	S-80955CLMC-G7RT2	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7S	-	S-80956CLMC-G7ST2	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7T	-	S-80957CLMC-G7TT2	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7U	-	S-80958CLMC-G7UT2	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7V	-	S-80959CLMC-G7VT2	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
G7W	-	S-80960CLMC-G7WT2	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6d	Sii
g8	-	BD46E305G-M	Vdet-IC	3.0V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
G8	-	BL8555-18GQ	LVR-IC	LDO, 1.8V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G8	-	BL8555-18GRA	LVR-IC	LDO, 1.8V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G8	-	BL8555-18GRB	LVR-IC	LDO, 1.8V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G8	-	BU34TD3WG	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
G8	-	ELM89382B	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
G8	-	LR8555-18GQ	LVR-IC	LDO, 1.8V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G8	-	LR8555-18GRA	LVR-IC	LDO, 1.8V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G8	-	LR8555-18GRB	LVR-IC	LDO, 1.8V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G8	-	R1111N381B	LVR-IC	LDO, Low noise, 3.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G8	-	Si91844DT-36	LVR-IC	LDO, LN, 3.6V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
G8	-	TC7SET86F	CMOS-Log	2-input EXCLUSIVE-OR gate	SSOP-5	28	Log5	6a	Tos
G8	-	TC7SET86FU	CMOS-Log	2-input EXCLUSIVE-OR gate	SC-70-5	28	Log5	6a	Tos
G8	ea	BL8555-18SQ	LVR-IC	LDO, 1.8V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G8	ea	BL8555-18SRA	LVR-IC	LDO, 1.8V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G8	ea	BL8555-18SRB	LVR-IC	LDO, 1.8V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G8	ea	LR8555-18SQ	LVR-IC	LDO, 1.8V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G8	ea	LR8555-18SRA	LVR-IC	LDO, 1.8V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G8	ea	LR8555-18SRB	LVR-IC	LDO, 1.8V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G8	eu	BL8555-28SQ	LVR-IC	LDO, 2.8V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G8	eu	BL8555-28SRA	LVR-IC	LDO, 2.8V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G8	eu	BL8555-28SRB	LVR-IC	LDO, 2.8V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G8	eu	LR8555-28SQ	LVR-IC	LDO, 2.8V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G8	eu	LR8555-28SRA	LVR-IC	LDO, 2.8V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G8	eu	LR8555-28SRB	LVR-IC	LDO, 2.8V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G8	fg	BL8555-38SQ	LVR-IC	LDO, 3.8V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G8	fg	BL8555-38SRA	LVR-IC	LDO, 3.8V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G8	fg	BL8555-38SRB	LVR-IC	LDO, 3.8V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G8	fg	LR8555-38SQ	LVR-IC	LDO, 3.8V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G8	fg	LR8555-38SRA	LVR-IC	LDO, 3.8V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G8	fg	LR8555-38SRB	LVR-IC	LDO, 3.8V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G8	fh	BL8555-48SQ	LVR-IC	LDO, 4.8V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G8	fh	BL8555-48SRA	LVR-IC	LDO, 4.8V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G8	fh	BL8555-48SRB	LVR-IC	LDO, 4.8V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G8	fh	LR8555-48SQ	LVR-IC	LDO, 4.8V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G8	fh	LR8555-48SRA	LVR-IC	LDO, 4.8V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G8	fh	LR8555-48SRB	LVR-IC	LDO, 4.8V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G8	fk	BL8555-38GQ	LVR-IC	LDO, 3.8V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G8	fk	BL8555-38GRA	LVR-IC	LDO, 3.8V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G8	fk	BL8555-38GRB	LVR-IC	LDO, 3.8V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G8	fk	LR8555-38GQ	LVR-IC	LDO, 3.8V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G8	fk	LR8555-38GRA	LVR-IC	LDO, 3.8V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G8	fk	LR8555-38GRB	LVR-IC	LDO, 3.8V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G8	fm	BL8555-48GQ	LVR-IC	LDO, 4.8V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G8	fm	BL8555-48GRA	LVR-IC	LDO, 4.8V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G8	fm	BL8555-48GRB	LVR-IC	LDO, 4.8V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G8	fm	LR8555-48GQ	LVR-IC	LDO, 4.8V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G8	fm	LR8555-48GRA	LVR-IC	LDO, 4.8V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G8	fm	LR8555-48GRB	LVR-IC	LDO, 4.8V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G8	fp	BL8555-28GQ	LVR-IC	LDO, 2.8V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G8	fp	BL8555-28GRA	LVR-IC	LDO, 2.8V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G8	fp	BL8555-28GRB	LVR-IC	LDO, 2.8V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G8	fp	LR8555-28GQ	LVR-IC	LDO, 2.8V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G8	fp	LR8555-28GRA	LVR-IC	LDO, 2.8V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G8	fp	LR8555-28GRB	LVR-IC	LDO, 2.8V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G80	-	S-80930CNMC-G80T2	Vdet-IC	3.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G81	-	S-80931CNMC-G81T2	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G82	-	S-80932CNMC-G82T2	Vdet-IC	3.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G83	-	S-80933CNMC-G83T2	Vdet-IC	3.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G84	-	S-80934CNMC-G84T2	Vdet-IC	3.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G85	-	S-80935CNMC-G85T2	Vdet-IC	3.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
g86	-	XC7SET86GV	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT753	28	Log5	6a	Nxp
G86	-	S-80936CNMC-G86T2	Vdet-IC	3.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G87	-	S-80937CNMC-G87T2	Vdet-IC	3.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G88	-	S-80938CNMC-G88T2	Vdet-IC	3.8V±2.0%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G89	-	S-80939CNMC-G89T2	Vdet-IC	3.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8H	-	S-80913CNMC-G8HT2	Vdet-IC	1.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8J	-	S-80914CNMC-G8JT2	Vdet-IC	1.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8K	-	S-80915CNMC-G8KT2	Vdet-IC	1.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8L	-	S-80916CNMC-G8LT2	Vdet-IC	1.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8M	-	S-80917CNMC-G8MT2	Vdet-IC	1.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8N	-	S-80918CNMC-G8NT2	Vdet-IC	1.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8P	-	S-80919CNMC-G8PT2	Vdet-IC	1.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8Q	-	S-80920CNMC-G8QT2	Vdet-IC	2.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8R	-	S-80921CNMC-G8RT2	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8S	-	S-80922CNMC-G8ST2	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8T	-	S-80923CNMC-G8TT2	Vdet-IC	2.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8U	-	S-80924CNMC-G8UT2	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8V	-	S-80925CNMC-G8VT2	Vdet-IC	2.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8W	-	S-80926CNMC-G8WT2	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8X	-	S-80927CNMC-G8XT2	Vdet-IC	2.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8Y	-	S-80928CNMC-G8YT2	Vdet-IC	2.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G8Z	-	S-80929CNMC-G8ZT2	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
g9	-	BD46E315G-M	Vdet-IC	3.1V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
G9	-	BL8555-19GQ	LVR-IC	LDO, 1.9V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G9	-	BL8555-19GRA	LVR-IC	LDO, 1.9V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G9	-	BL8555-19GRB	LVR-IC	LDO, 1.9V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G9	-	ELM89392B	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
G9	-	LR8555-19GQ	LVR-IC	LDO, 1.9V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G9	-	LR8555-19GRA	LVR-IC	LDO, 1.9V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G9	-	LR8555-19GRB	LVR-IC	LDO, 1.9V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G9	-	R1111N391B	LVR-IC	LDO, Low noise, 3.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
G9	-	Si91844DT-50	LVR-IC	LDO, LN, 5.0V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
G9	ea	BL8555-19SQ	LVR-IC	LDO, 1.9V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G9	ea	BL8555-19SRA	LVR-IC	LDO, 1.9V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G9	ea	BL8555-19SRB	LVR-IC	LDO, 1.9V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G9	ea	LR8555-19SQ	LVR-IC	LDO, 1.9V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G9	ea	LR8555-19SRA	LVR-IC	LDO, 1.9V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G9	ea	LR8555-19SRB	LVR-IC	LDO, 1.9V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G9	eu	BL8555-29SQ	LVR-IC	LDO, 2.9V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G9	eu	BL8555-29SRA	LVR-IC	LDO, 2.9V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G9	eu	BL8555-29SRB	LVR-IC	LDO, 2.9V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G9	eu	LR8555-29SQ	LVR-IC	LDO, 2.9V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G9	eu	LR8555-29SRA	LVR-IC	LDO, 2.9V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G9	eu	LR8555-29SRB	LVR-IC	LDO, 2.9V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G9	fg	BL8555-39SQ	LVR-IC	LDO, 3.9V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G9	fg	BL8555-39SRA	LVR-IC	LDO, 3.9V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G9	fg	BL8555-39SRB	LVR-IC	LDO, 3.9V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G9	fg	LR8555-39SQ	LVR-IC	LDO, 3.9V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G9	fg	LR8555-39SRA	LVR-IC	LDO, 3.9V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G9	fg	LR8555-39SRB	LVR-IC	LDO, 3.9V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G9	fh	BL8555-49SQ	LVR-IC	LDO, 4.9V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Shb
G9	fh	BL8555-49SRA	LVR-IC	LDO, 4.9V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Shb
G9	fh	BL8555-49SRB	LVR-IC	LDO, 4.9V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Shb
G9	fh	LR8555-49SQ	LVR-IC	LDO, 4.9V±2%, 350mA	SC-70-5	28ym	VR1	6kd	Lrc
G9	fh	LR8555-49SRA	LVR-IC	LDO, 4.9V±2%, 350mA	SOT-23-5	28ym	VR1	6kd	Lrc
G9	fh	LR8555-49SRB	LVR-IC	LDO, 4.9V±2%, 350mA	SOT-23-5	28c5	VR1	6kc	Lrc
G9	fk	BL8555-39GQ	LVR-IC	LDO, 3.9V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G9	fk	BL8555-39GRA	LVR-IC	LDO, 3.9V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G9	fk	BL8555-39GRB	LVR-IC	LDO, 3.9V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G9	fk	LR8555-39GQ	LVR-IC	LDO, 3.9V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G9	fk	LR8555-39GRA	LVR-IC	LDO, 3.9V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G9	fk	LR8555-39GRB	LVR-IC	LDO, 3.9V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G9	fm	BL8555-49GQ	LVR-IC	LDO, 4.9V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G9	fm	BL8555-49GRA	LVR-IC	LDO, 4.9V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G9	fm	BL8555-49GRB	LVR-IC	LDO, 4.9V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G9	fm	LR8555-49GQ	LVR-IC	LDO, 4.9V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G9	fm	LR8555-49GRA	LVR-IC	LDO, 4.9V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G9	fm	LR8555-49GRB	LVR-IC	LDO, 4.9V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G9	fp	BL8555-29GQ	LVR-IC	LDO, 2.9V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
G9	fp	BL8555-29GRA	LVR-IC	LDO, 2.9V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
G9	fp	BL8555-29GRB	LVR-IC	LDO, 2.9V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
G9	fp	LR8555-29GQ	LVR-IC	LDO, 2.9V±2%, 350mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
G9	fp	LR8555-29GRA	LVR-IC	LDO, 2.9V±2%, 350mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
G9	fp	LR8555-29GRB	LVR-IC	LDO, 2.9V±2%, 350mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
G9A	-	S-80940CNMC-G9AT2	Vdet-IC	4.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9B	-	S-80941CNMC-G9BT2	Vdet-IC	4.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9C	-	S-80942CNMC-G9CT2	Vdet-IC	4.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9D	-	S-80943CNMC-G9DT2	Vdet-IC	4.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9E	-	S-80944CNMC-G9ET2	Vdet-IC	4.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9F	-	S-80945CNMC-G9FT2	Vdet-IC	4.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9G	-	S-80946CNMC-G9GT2	Vdet-IC	4.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9H	-	S-80947CNMC-G9HT2	Vdet-IC	4.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9J	-	S-80948CNMC-G9JT2	Vdet-IC	4.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9K	-	S-80949CNMC-G9KT2	Vdet-IC	4.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9L	-	S-80950CNMC-G9LT2	Vdet-IC	5.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9M	-	S-80951CNMC-G9MT2	Vdet-IC	5.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9N	-	S-80952CNMC-G9NT2	Vdet-IC	5.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9P	-	S-80953CNMC-G9PT2	Vdet-IC	5.3V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9Q	-	S-80954CNMC-G9QT2	Vdet-IC	5.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9R	-	S-80955CNMC-G9RT2	Vdet-IC	5.5V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9S	-	S-80956CNMC-G9ST2	Vdet-IC	5.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9T	-	S-80957CNMC-G9TT2	Vdet-IC	5.7V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9U	-	S-80958CNMC-G9UT2	Vdet-IC	5.8V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9V	-	S-80959CNMC-G9VT2	Vdet-IC	5.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
G9W	-	S-80960CNMC-G9WT2	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6d	Sii
Ga	-	FP6801-22CS5P	Vdet-IC	2.2V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Fit
GA	-	BD4940FVE	Vdet-IC	4.0V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GA	-	BD4940G	Vdet-IC	4.0V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GA	-	IDT74ALVC1G00DY	CMOS-Log	2-input NAND gate	SO5-1	28	Log1	6g	Idt
GAA	-	RP170N331B	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAB	-	RP170N341B	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAC	-	RP170N351B	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAD	-	RP170N361B	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAE	-	RP170N371B	LVR-IC	LDO, 3.7V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAF	-	RP170N381B	LVR-IC	LDO, 3.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAG	-	RP170N391B	LVR-IC	LDO, 3.9V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAH	-	RP170N401B	LVR-IC	LDO, 4.0V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAJ	-	RP170N411B	LVR-IC	LDO, 4.1V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAK	-	RP170N421B	LVR-IC	LDO, 4.2V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAL	-	RP170N431B	LVR-IC	LDO, 4.3V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAM	-	RP170N441B	LVR-IC	LDO, 4.4V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAN	-	RP170N451B	LVR-IC	LDO, 4.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAP	-	RP170N461B	LVR-IC	LDO, 4.6V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAQ	-	RP170N471B	LVR-IC	LDO, 4.7V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAR	-	RP170N481B	LVR-IC	LDO, 4.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAS	-	RP170N491B	LVR-IC	LDO, 4.9V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAT	-	RP170N501B	LVR-IC	LDO, 5.0V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAU	-	RP170N511B	LVR-IC	LDO, 5.1V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAV	-	RP170N521B	LVR-IC	LDO, 5.2V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAW	-	RP170N531B	LVR-IC	LDO, 5.3V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAX	-	RP170N541B	LVR-IC	LDO, 5.4V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAY	-	RP170N551B	LVR-IC	LDO, 5.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GAZ	-	RP170N561B	LVR-IC	LDO, 5.6V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
gB	-	XC7SET02GW	CMOS-Log	2-input NOR gate	SOT-353-1	28	Log2	6a	Nxp
Gb	-	FP6801-26CS5P	Vdet-IC	2.6V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Fit
GB	-	AAT3221IGV-1.7	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
GB	-	BD4941FVE	Vdet-IC	4.1V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GB	-	BD4941G	Vdet-IC	4.1V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GB	-	IDT74ALVC1G02DY	CMOS-Log	2-input NOR gate	SO5-1	28	Log2	6g	Idt
GB1	-	RP170N471D	LVR-IC	LDO, 4.7V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GBA	-	RP170N331D	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBB	-	RP170N341D	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBC	-	RP170N351D	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBD	-	RP170N361D	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBE	-	RP170N371D	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBF	-	RP170N381D	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBG	-	RP170N391D	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBH	-	RP170N401D	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBJ	-	RP170N411D	LVR-IC	LDO, 4.1V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBK	-	RP170N421D	LVR-IC	LDO, 4.2V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBL	-	RP170N431D	LVR-IC	LDO, 4.3V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBM	-	RP170N441D	LVR-IC	LDO, 4.4V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBN	-	RP170N451D	LVR-IC	LDO, 4.5V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBP	-	RP170N461D	LVR-IC	LDO, 4.6V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBR	-	RP170N481D	LVR-IC	LDO, 4.8V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBS	-	RP170N491D	LVR-IC	LDO, 4.9V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBT	-	RP170N501D	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBU	-	RP170N511D	LVR-IC	LDO, 5.1V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBV	-	RP170N521D	LVR-IC	LDO, 5.2V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBW	-	RP170N531D	LVR-IC	LDO, 5.3V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBX	-	RP170N541D	LVR-IC	LDO, 5.4V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBY	-	RP170N551D	LVR-IC	LDO, 5.5V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
GBZ	-	RP170N561D	LVR-IC	LDO, 5.6V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
gC	-	XC7SET04GW	CMOS-Log	Inverter	SOT-353-1	28	Log6	6a	Nxp
GC	-	BD4942FVE	Vdet-IC	4.2V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GC	-	BD4942G	Vdet-IC	4.2V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GC	-	IDT74ALVC1G04DY	CMOS-Log	Inverter	SO5-1	28	Log6	6g	Idt
Gd	-	FP6801-29CS5P	Vdet-IC	2.9V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Fit
GD	-	AAT3221IGV-2.7	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
GD	-	BD4943FVE	Vdet-IC	4.3V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GD	-	BD4943G	Vdet-IC	4.3V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GD	-	IDT74ALVC1GU04DY	CMOS-Log	Inverter	SO5-1	28	Log6	6g	Idt
gE	-	XC7SET08GW	CMOS-Log	2-input AND gate	SOT-353-1	28	Log3	6a	Nxp
Ge	-	FP6801-31CS5P	Vdet-IC	3.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Fit
GE	-	BD4944FVE	Vdet-IC	4.4V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GE	-	BD4944G	Vdet-IC	4.4V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GE	-	IDT74ALVC1G08DY	CMOS-Log	2-input AND gate	SO5-1	28	Log3	6g	Idt
GE08G	-	AIC1748BH-08GV5	LVR-IC	LDO, 0.8V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE09G	-	AIC1748BH-09GV5	LVR-IC	LDO, 0.9V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE10G	-	AIC1748BH-10GV5	LVR-IC	LDO, 1.0V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE11G	-	AIC1748BH-11GV5	LVR-IC	LDO, 1.1V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE12G	-	AIC1748BH-12GV5	LVR-IC	LDO, 1.2V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE13G	-	AIC1748BH-13GV5	LVR-IC	LDO, 1.3V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE14G	-	AIC1748BH-14GV5	LVR-IC	LDO, 1.4V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE15G	-	AIC1748BH-15GV5	LVR-IC	LDO, 1.5V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE16G	-	AIC1748BH-16GV5	LVR-IC	LDO, 1.6V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE17G	-	AIC1748BH-17GV5	LVR-IC	LDO, 1.7V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE18G	-	AIC1748BH-18GV5	LVR-IC	LDO, 1.8V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE19G	-	AIC1748BH-19GV5	LVR-IC	LDO, 1.9V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE20G	-	AIC1748BH-20GV5	LVR-IC	LDO, 2.0V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE21G	-	AIC1748BH-21GV5	LVR-IC	LDO, 2.1V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE22G	-	AIC1748BH-22GV5	LVR-IC	LDO, 2.2V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE23G	-	AIC1748BH-23GV5	LVR-IC	LDO, 2.3V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE24G	-	AIC1748BH-24GV5	LVR-IC	LDO, 2.4V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE25G	-	AIC1748BH-25GV5	LVR-IC	LDO, 2.5V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE26G	-	AIC1748BH-26GV5	LVR-IC	LDO, 2.6V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE27G	-	AIC1748BH-27GV5	LVR-IC	LDO, 2.7V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE28G	-	AIC1748BH-28GV5	LVR-IC	LDO, 2.8V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE29G	-	AIC1748BH-29GV5	LVR-IC	LDO, 2.9V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE2JG	-	AIC1748BH-285GV5	LVR-IC	LDO, 2.85V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE30G	-	AIC1748BH-30GV5	LVR-IC	LDO, 3.0V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE31G	-	AIC1748BH-31GV5	LVR-IC	LDO, 3.1V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE32G	-	AIC1748BH-32GV5	LVR-IC	LDO, 3.2V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
GE33G	-	AIC1748BH-33GV5	LVR-IC	LDO, 3.3V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6a	Aic
gF	-	XC7SET14GW	CMOS-Log	Inverting Schmitt-trigger	SOT-353-1	28	Log7	6a	Nxp
Gf	-	FP6801-21CS5P	Vdet-IC	2.1V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Fit
GF	-	BD4945FVE	Vdet-IC	4.5V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GF	-	BD4945G	Vdet-IC	4.5V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GF	-	IDT74ALVC1G14DY	CMOS-Log	Inverting Schmitt-trigger	SO5-1	28	Log7	6g	Idt
GF08G	-	AIC1748BL-08GV5	LVR-IC	LDO, 0.8V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GF09G	-	AIC1748BL-09GV5	LVR-IC	LDO, 0.9V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF10G	-	AIC1748BL-10GV5	LVR-IC	LDO, 1.0V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF11G	-	AIC1748BL-11GV5	LVR-IC	LDO, 1.1V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF12G	-	AIC1748BL-12GV5	LVR-IC	LDO, 1.2V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF13G	-	AIC1748BL-13GV5	LVR-IC	LDO, 1.3V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF14G	-	AIC1748BL-14GV5	LVR-IC	LDO, 1.4V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF15G	-	AIC1748BL-15GV5	LVR-IC	LDO, 1.5V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF16G	-	AIC1748BL-16GV5	LVR-IC	LDO, 1.6V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF17G	-	AIC1748BL-17GV5	LVR-IC	LDO, 1.7V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF18G	-	AIC1748BL-18GV5	LVR-IC	LDO, 1.8V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF19G	-	AIC1748BL-19GV5	LVR-IC	LDO, 1.9V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF20G	-	AIC1748BL-20GV5	LVR-IC	LDO, 2.0V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF21G	-	AIC1748BL-21GV5	LVR-IC	LDO, 2.1V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF22G	-	AIC1748BL-22GV5	LVR-IC	LDO, 2.2V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF23G	-	AIC1748BL-23GV5	LVR-IC	LDO, 2.3V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF24G	-	AIC1748BL-24GV5	LVR-IC	LDO, 2.4V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF25G	-	AIC1748BL-25GV5	LVR-IC	LDO, 2.5V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF26G	-	AIC1748BL-26GV5	LVR-IC	LDO, 2.6V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF27G	-	AIC1748BL-27GV5	LVR-IC	LDO, 2.7V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF28G	-	AIC1748BL-28GV5	LVR-IC	LDO, 2.8V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF29G	-	AIC1748BL-29GV5	LVR-IC	LDO, 2.9V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF2JG	-	AIC1748BL-285GV5	LVR-IC	LDO, 2.85V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF30G	-	AIC1748BL-30GV5	LVR-IC	LDO, 3.0V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF31G	-	AIC1748BL-31GV5	LVR-IC	LDO, 3.1V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF32G	-	AIC1748BL-32GV5	LVR-IC	LDO, 3.2V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
GF33G	-	AIC1748BL-33GV5	LVR-IC	LDO, 3.3V±2%, 600mA, -CE	SOT-23-5	28vrx	VR7	6a	Aic
gG	-	XC7SET32GW	CMOS-Log	2-input OR gate	SOT-353-1	28	Log4	6a	Nxp
GG	-	BD4946FVE	Vdet-IC	4.6V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GG	-	BD4946G	Vdet-IC	4.6V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GG	-	IDT74ALVC1G32DY	CMOS-Log	2-input OR gate	SO5-1	28	Log4	6g	Idt
GGG	-	AIC1748AH-285GV5	LVR-IC	LDO, Adjustable 0.8..4.5V, 600mA, +CE	SOT-23-5	28sg	VR5	6a	Aic
gH	-	XC7SET86GW	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353-1	28	Log5	6a	Nxp
Gh	-	FP6801-21NS5P	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Fit
GH	-	BD4947FVE	Vdet-IC	4.7V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GH	-	BD4947G	Vdet-IC	4.7V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GH	-	IDT74ALVC1G86DY	CMOS-Log	2-input EXCLUSIVE-OR gate	SO5-1	28	Log5	6g	Idt
GHG	-	AIC1748AL-285GV5	LVR-IC	LDO, Adjustable 0.8..4.5V, 600mA, -CE	SOT-23-5	28sg	VR5	6a	Aic
GJ	-	BD4948FVE	Vdet-IC	4.8V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GJ	-	BD4948G	Vdet-IC	4.8V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GJ-	-	RT9198-15PV	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
Gk	-	FP6801-22NS5P	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Fit
GK	-	BD4949FVE	Vdet-IC	4.9V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GK	-	BD4949G	Vdet-IC	4.9V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GL	-	BD4950FVE	Vdet-IC	5.0V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GL	-	BD4950G	Vdet-IC	5.0V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GL	-	R1112N301B	LVR-IC	LDO, Low noise, 3.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
gM	-	XC7SET125GW	CMOS-Log	Bus buffer gate with 3-state output	SOT-353-1	28	Log14	6a	Nxp
Gm	-	FP6801-26NS5P	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Fit
GM	-	BD4951FVE	Vdet-IC	5.1V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GM	-	BD4951G	Vdet-IC	5.1V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GM	-	IDT74ALVC1G125DY	CMOS-Log	Bus buffer gate with 3-state output	SO5-1	28	Log14	6g	Idt
GM	-	R1112N311B	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
Gn	-	FP6801-29NS5P	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Fit
GN	-	BD4952FVE	Vdet-IC	5.2V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GN	-	BD4952G	Vdet-IC	5.2V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GN	-	IDT74ALVC1G126DY	CMOS-Log	Bus buffer gate with 3-state output	SO5-1	28	Log13	6g	Idt
GN	-	R1112N321B	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GP	-	AAT3221IGV-2.6	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
GP	-	BD4953FVE	Vdet-IC	5.3V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GP	-	BD4953G	Vdet-IC	5.3V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GP	-	R1112N331B	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GQ	-	BD4954FVE	Vdet-IC	5.4V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GQ	-	BD4954G	Vdet-IC	5.4V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GQ	-	R1112N341B	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
Gr	-	FP6801-31NS5P	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Fit
GR	-	AT1201-25XR	LVR-IC	LDO, LN, +CE, 2.5V±2%, 150mA	SOT-23-5	28un	VR7	6a	Atr
GR	-	BD4955FVE	Vdet-IC	5.5V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GR	-	BD4955G	Vdet-IC	5.5V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GR	-	IDT74ALVC1G79DY	CMOS-Log	Positive edge-triggered D-type flip-flop	SO5-1	28	Log20	6g	Idt
GR	-	R1112N351B	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GS	-	BD4956FVE	Vdet-IC	5.6V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GS	-	BD4956G	Vdet-IC	5.6V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GS	-	R1112N361B	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GT	-	BD4957FVE	Vdet-IC	5.7V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GT	-	BD4957G	Vdet-IC	5.7V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GT	-	IDT74ALVC1G06DY	CMOS-Log	Inverter (ODO)	SO5-1	28	Log19	6g	Idt
GT	-	R1112N371B	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GU	-	BD4958FVE	Vdet-IC	5.8V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GU	-	BD4958G	Vdet-IC	5.8V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GU	-	R1112N381B	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GV	-	AAT3221IGV-3.1	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
GV	-	BD4959FVE	Vdet-IC	5.9V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GV	-	BD4959G	Vdet-IC	5.9V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GV	-	IDT74ALVC1G07DY	CMOS-Log	Noninverting buffer/driver (ODO)	SO5-1	28	Log8	6g	Idt
GV	-	R1112N391B	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
GW	-	BD4960FVE	Vdet-IC	6.0V±1%, -Reset PPO	VSOF-5	30vdv	VD7	6e	Rhm
GW	-	BD4960G	Vdet-IC	6.0V±1%, -Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
GX	-	AT1201-25X	LVR-IC	LDO, LN, +CE, 2.5V±2%, 150mA	SOT-23-5	28vrx	VR7	6a	Atr
GY	-	AAT3221IGV-1.6	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
GY	-	IDT74ALVC1G132DY	CMOS-Log	2-input NAND Schmitt-trigger	SO5-1	28	Log12	6g	Idt
GZ	-	FP6801-24CS5P	Vdet-IC	2.4V±2%, -Reset PPO	SOT-23-5	28vdo	VD3	6a	Fit
H0	-	ELM89402B	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	SOT-25	28cx	VR4	6g	Elm
H0	-	R1111N401B	LVR-IC	LDO, Low noise, 4.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
H0	eu	BL8555-20TQ	LVR-IC	LDO, 2.0V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H0	eu	BL8555-20TRA	LVR-IC	LDO, 2.0V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H0	eu	BL8555-20TRB	LVR-IC	LDO, 2.0V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H0	eu	LR8555-20TQ	LVR-IC	LDO, 2.0V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H0	eu	LR8555-20TRA	LVR-IC	LDO, 2.0V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H0	eu	LR8555-20TRB	LVR-IC	LDO, 2.0V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H0	fg	BL8555-30TQ	LVR-IC	LDO, 3.0V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H0	fg	BL8555-30TRA	LVR-IC	LDO, 3.0V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H0	fg	BL8555-30TRB	LVR-IC	LDO, 3.0V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H0	fg	LR8555-30TQ	LVR-IC	LDO, 3.0V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H0	fg	LR8555-30TRA	LVR-IC	LDO, 3.0V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H0	fg	LR8555-30TRB	LVR-IC	LDO, 3.0V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H0	fh	BL8555-40TQ	LVR-IC	LDO, 4.0V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H0	fh	BL8555-40TRA	LVR-IC	LDO, 4.0V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H0	fh	BL8555-40TRB	LVR-IC	LDO, 4.0V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H0	fh	LR8555-40TQ	LVR-IC	LDO, 4.0V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H0	fh	LR8555-40TRA	LVR-IC	LDO, 4.0V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H0	fh	LR8555-40TRB	LVR-IC	LDO, 4.0V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H0	fi	BL8555-50TQ	LVR-IC	LDO, 5.0V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H0	fi	BL8555-50TRA	LVR-IC	LDO, 5.0V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H0	fi	BL8555-50TRB	LVR-IC	LDO, 5.0V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H0	fi	LR8555-50TQ	LVR-IC	LDO, 5.0V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H0	fi	LR8555-50TRA	LVR-IC	LDO, 5.0V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H0	fi	LR8555-50TRB	LVR-IC	LDO, 5.0V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H0	fk	BL8555-30HQ	LVR-IC	LDO, 3.0V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H0	fk	BL8555-30HRA	LVR-IC	LDO, 3.0V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H0	fk	BL8555-30HRB	LVR-IC	LDO, 3.0V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H0	fk	LR8555-30HQ	LVR-IC	LDO, 3.0V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H0	fk	LR8555-30HRA	LVR-IC	LDO, 3.0V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H0	fk	LR8555-30HRB	LVR-IC	LDO, 3.0V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H0	fm	BL8555-40HQ	LVR-IC	LDO, 4.0V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H0	fm	BL8555-40HRA	LVR-IC	LDO, 4.0V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H0	fm	BL8555-40HRB	LVR-IC	LDO, 4.0V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H0	fm	LR8555-40HQ	LVR-IC	LDO, 4.0V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H0	fm	LR8555-40HRA	LVR-IC	LDO, 4.0V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H0	fm	LR8555-40HRB	LVR-IC	LDO, 4.0V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H0	fn	BL8555-50HQ	LVR-IC	LDO, 5.0V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H0	fn	BL8555-50HRA	LVR-IC	LDO, 5.0V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H0	fn	BL8555-50HRB	LVR-IC	LDO, 5.0V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H0	fn	LR8555-50HQ	LVR-IC	LDO, 5.0V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H0	fn	LR8555-50HRA	LVR-IC	LDO, 5.0V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H0	fn	LR8555-50HRB	LVR-IC	LDO, 5.0V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H0	fp	BL8555-20HQ	LVR-IC	LDO, 2.0V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H0	fp	BL8555-20HRA	LVR-IC	LDO, 2.0V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H0	fp	BL8555-20HRB	LVR-IC	LDO, 2.0V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H0	fp	LR8555-20HQ	LVR-IC	LDO, 2.0V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H0	fp	LR8555-20HRA	LVR-IC	LDO, 2.0V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H0	fp	LR8555-20HRB	LVR-IC	LDO, 2.0V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H00	-	74HC1G00GV	CMOS-Log	2-input NAND gate	SOT753	28	Log1	6a	Nxp
H00	-	SN74AUP1G00DBV	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6g	Ti
H001	-	RP103Q122D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H002	-	RP103Q132D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H003	-	RP103Q152D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H004	-	RP103Q182D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H005	-	RP103Q182D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H006	-	RP103Q192D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H007	-	RP103Q202D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H008	-	RP103Q212D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H009	-	RP103Q232D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H010	-	RP103Q252D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H011	-	RP103Q262D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H012	-	RP103Q272D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H013	-	RP103Q282D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H014	-	RP103Q282D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H015	-	RP103Q292D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H016	-	RP103Q302D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H017	-	RP103Q312D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H018	-	RP103Q322D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H019	-	RP103Q332D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H02	-	74HC1G02GV	CMOS-Log	2-input NOR gate	SOT753	28	Log2	6a	Nxp
H02	-	SN74AUP1G02DBV	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6g	Ti
H02	-	U7SH02-AF5	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6a	Utc
H02	-	U7SH02-AL5	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6a	Utc
H020	-	RP103Q292D5	LVR-IC	LDO, 2.95V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H021	-	RP103Q222D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H022	-	RP103Q162D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H023	-	RP103Q142D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H024	-	RP103Q172D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H025	-	RP103Q242D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
H02L	-	U7SH02L-AF5	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6a	Utc
H02L	-	U7SH02L-AL5	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6a	Utc
H03	-	TC53C6002ECT	Vdet-IC	6.0V±2%, -Reset PPO	SOT-23-5	28vd1	VD7	6g	Mcc
H04	-	74HC1G04GV	CMOS-Log	Inverter	SOT753	28	Log6	6a	Nxp
H04	-	SN74AUP1G04DBV	CMOS-Log	Inverter	SOT-23-5	28	Log6	6g	Ti
H06	-	SN74AUP1G06DBV	CMOS-Log	Inverter (ODO)	SOT-23-5	28	Log19	6g	Ti
H07	-	RP111N071B	LVR-IC	LDO, 0.7V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H07	-	SN74AUP1G07DBV	CMOS-Log	Noninverting buffer/driver (ODO)	SOT-23-5	28	Log8	6g	Ti
H08	-	74HC1G08GV	CMOS-Log	2-input AND gate	SOT753	28	Log3	6a	Nxp
H08	-	RP111N081B	LVR-IC	LDO, 0.8V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H08	-	SN74AUP1G08DBV	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6g	Ti
H08	-	U7SH08-AF5	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6a	Utc
H08	-	U7SH08-AL5	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Utc
H08	-	XC6220A081MR	LVR-IC	LDO, 0.8V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H08L	-	U7SH08L-AF5	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6a	Utc
H08L	-	U7SH08L-AL5	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Utc
H09	-	RP111N091B	LVR-IC	LDO, 0.9V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H09	-	XC6220A091MR	LVR-IC	LDO, 0.9V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H090X	-	VRH0902LT	LVR-IC	LDO, 0.9V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H095X	-	VRH0952LT	LVR-IC	LDO, 0.95V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H0A	-	RP130N121A	LVR-IC	LDO, LN, -CE, 1.2V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0A	-	XC6220A101MR	LVR-IC	LDO, 1.0V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0B	-	RP130N131A	LVR-IC	LDO, LN, -CE, 1.3V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0B	-	XC6220A111MR	LVR-IC	LDO, 1.1V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0C	-	RP130N141A	LVR-IC	LDO, LN, -CE, 1.4V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0C	-	XC6220A121MR	LVR-IC	LDO, 1.2V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0D	-	RP130N151A	LVR-IC	LDO, LN, -CE, 1.5V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0D	-	XC6220A131MR	LVR-IC	LDO, 1.3V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0E	-	RP130N161A	LVR-IC	LDO, LN, -CE, 1.6V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0E	-	XC6220A141MR	LVR-IC	LDO, 1.4V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0F	-	RP130N171A	LVR-IC	LDO, LN, -CE, 1.7V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0F	-	XC6220A151MR	LVR-IC	LDO, 1.5V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0G	-	RP130N181A	LVR-IC	LDO, LN, -CE, 1.8V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0H	-	RP130N181A5	LVR-IC	LDO, LN, -CE, 1.85V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0H	-	XC6220A161MR	LVR-IC	LDO, 1.6V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0J	-	RP130N191A	LVR-IC	LDO, LN, -CE, 1.9V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0K	-	RP130N201A	LVR-IC	LDO, LN, -CE, 2V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0K	-	XC6220A171MR	LVR-IC	LDO, 1.7V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H0L	-	RP130N211A	LVR-IC	LDO, LN, -CE, 2.1V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0L	-	XC6220A181MR	LVR-IC	LDO, 1.8V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0M	-	RP130N221A	LVR-IC	LDO, LN, -CE, 2.2V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0M	-	XC6220A191MR	LVR-IC	LDO, 1.9V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0N	-	RP130N231A	LVR-IC	LDO, LN, -CE, 2.3V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0N	-	XC6220A201MR	LVR-IC	LDO, 2.0V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0P	-	RP130N241A	LVR-IC	LDO, LN, -CE, 2.4V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0P	-	XC6220A211MR	LVR-IC	LDO, 2.1V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0Q	-	RP130N251A	LVR-IC	LDO, LN, -CE, 2.5V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0R	-	RP130N261A	LVR-IC	LDO, LN, -CE, 2.6V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0R	-	XC6220A221MR	LVR-IC	LDO, 2.2V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0S	-	RP130N271A	LVR-IC	LDO, LN, -CE, 2.7V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0S	-	XC6220A231MR	LVR-IC	LDO, 2.3V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0T	-	RP130N281A	LVR-IC	LDO, LN, -CE, 2.8V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0T	-	XC6220A241MR	LVR-IC	LDO, 2.4V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0U	-	RP130N281A5	LVR-IC	LDO, LN, -CE, 2.85V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0U	-	XC6220A251MR	LVR-IC	LDO, 2.5V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0V	-	RP130N291A	LVR-IC	LDO, LN, -CE, 2.9V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0V	-	XC6220A261MR	LVR-IC	LDO, 2.6V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0W	-	RP130N301A	LVR-IC	LDO, LN, -CE, 3V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0X	-	RP130N311A	LVR-IC	LDO, LN, -CE, 3.1V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0X	-	XC6220A271MR	LVR-IC	LDO, 2.7V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0Y	-	RP130N321A	LVR-IC	LDO, LN, -CE, 3.2V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0Y	-	XC6220A281MR	LVR-IC	LDO, 2.8V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H0Z	-	RP130N331A	LVR-IC	LDO, LN, -CE, 3.3V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H0Z	-	XC6220A291MR	LVR-IC	LDO, 2.9V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
h1	-	BD46E325G-M	Vdet-IC	3.2V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
H1	-	HD74HC1G00CM	CMOS-Log	2-input NAND gate	CMPAK-5	28	Log1	6a	Ren
H1	-	HD74UH00EL	CMOS-Log	2-input NAND gate	MPAK-5	28	Log1	6g	Ren
H1	-	MC74HC1G00DF	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6b	Ons
H1	-	MC74HC1G00DT	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6b	Ons
H1	-	R1111N411B	LVR-IC	LDO, Low noise, 4.1V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
H1	-	TC7SH00F	CMOS-Log	2-input NAND gate	SSOP-5	28	Log1	6a	Tos
H1	-	TC7SH00FU	CMOS-Log	2-input NAND gate	SC-70-5	28	Log1	6a	Tos
H1	eu	BL8555-21TQ	LVR-IC	LDO, 2.1V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H1	eu	BL8555-21TRA	LVR-IC	LDO, 2.1V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H1	eu	BL8555-21TRB	LVR-IC	LDO, 2.1V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H1	eu	LR8555-21TQ	LVR-IC	LDO, 2.1V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H1	eu	LR8555-21TRA	LVR-IC	LDO, 2.1V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H1	eu	LR8555-21TRB	LVR-IC	LDO, 2.1V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H1	fg	BL8555-31TQ	LVR-IC	LDO, 3.1V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H1	fg	BL8555-31TRA	LVR-IC	LDO, 3.1V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H1	fg	BL8555-31TRB	LVR-IC	LDO, 3.1V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H1	fg	LR8555-31TQ	LVR-IC	LDO, 3.1V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H1	fg	LR8555-31TRA	LVR-IC	LDO, 3.1V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H1	fg	LR8555-31TRB	LVR-IC	LDO, 3.1V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H1	fh	BL8555-41TQ	LVR-IC	LDO, 4.1V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H1	fh	BL8555-41TRA	LVR-IC	LDO, 4.1V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H1	fh	BL8555-41TRB	LVR-IC	LDO, 4.1V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H1	fh	LR8555-41TQ	LVR-IC	LDO, 4.1V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H1	fh	LR8555-41TRA	LVR-IC	LDO, 4.1V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H1	fh	LR8555-41TRB	LVR-IC	LDO, 4.1V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H1	fk	BL8555-31HQ	LVR-IC	LDO, 3.1V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H1	fk	BL8555-31HRA	LVR-IC	LDO, 3.1V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H1	fk	BL8555-31HRB	LVR-IC	LDO, 3.1V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H1	fk	LR8555-31HQ	LVR-IC	LDO, 3.1V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H1	fk	LR8555-31HRA	LVR-IC	LDO, 3.1V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H1	fk	LR8555-31HRB	LVR-IC	LDO, 3.1V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H1	fm	BL8555-41HQ	LVR-IC	LDO, 4.1V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H1	fm	BL8555-41HRA	LVR-IC	LDO, 4.1V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H1	fm	BL8555-41HRB	LVR-IC	LDO, 4.1V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H1	fm	LR8555-41HQ	LVR-IC	LDO, 4.1V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H1	fm	LR8555-41HRA	LVR-IC	LDO, 4.1V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H1	fm	LR8555-41HRB	LVR-IC	LDO, 4.1V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H1	fp	BL8555-21HQ	LVR-IC	LDO, 2.1V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H1	fp	BL8555-21HRA	LVR-IC	LDO, 2.1V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H1	fp	BL8555-21HRB	LVR-IC	LDO, 2.1V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H1	fp	LR8555-21HQ	LVR-IC	LDO, 2.1V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H1	fp	LR8555-21HRA	LVR-IC	LDO, 2.1V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H1	fp	LR8555-21HRB	LVR-IC	LDO, 2.1V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H10	-	R1224N102H	DC-DC-IC	PWM step-down, 1V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
H10	-	RP111N101B	LVR-IC	LDO, 1.0V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H100X	-	VRH1002LT	LVR-IC	LDO, 1.0V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H105X	-	VRH1052LT	LVR-IC	LDO, 1.05V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H11	-	RP111N111B	LVR-IC	LDO, 1.1V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H110X	-	VRH1102LT	LVR-IC	LDO, 1.1V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H115X	-	VRH1152LT	LVR-IC	LDO, 1.15V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H12	-	R1224N122H	DC-DC-IC	PWM step-down, 1.2V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
H12	-	RP111N121B	LVR-IC	LDO, 1.2V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H120X	-	VRH1202LT	LVR-IC	LDO, 1.2V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H125X	-	VRH1252LT	LVR-IC	LDO, 1.25V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H13	-	RP111N131B	LVR-IC	LDO, 1.3V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H130X	-	VRH1302LT	LVR-IC	LDO, 1.3V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H135X	-	VRH1352LT	LVR-IC	LDO, 1.35V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H14	-	74HC1G14GV	CMOS-Log	Inverting Schmitt-trigger	SOT753	28	Log7	6a	Nxp
H14	-	RP111N141B	LVR-IC	LDO, 1.4V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H14	-	SN74AUP1G14DBV	CMOS-Log	Inverting Schmitt-trigger	SOT-23-5	28	Log7	6g	Ti
H140X	-	VRH1402LT	LVR-IC	LDO, 1.4V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H145X	-	VRH1452LT	LVR-IC	LDO, 1.45V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H15	-	R1224N152H	DC-DC-IC	PWM step-down, 1.5V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
H15	-	RP111N151B	LVR-IC	LDO, 1.5V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H150X	-	VRH1502LT	LVR-IC	LDO, 1.5V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H155X	-	VRH1552LT	LVR-IC	LDO, 1.55V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H16	-	RP111N161B	LVR-IC	LDO, 1.6V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H160X	-	VRH1602LT	LVR-IC	LDO, 1.6V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H165X	-	VRH1652LT	LVR-IC	LDO, 1.65V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H17	-	RP111N171B	LVR-IC	LDO, 1.7V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H17	-	SN74AUP1G17DBV	CMOS-Log	Schmitt-trigger	SOT-23-5	28	Log11	6g	Ti
H170X	-	VRH1702LT	LVR-IC	LDO, 1.7V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H175X	-	VRH1752LT	LVR-IC	LDO, 1.75V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H18	-	R1224N182H	DC-DC-IC	PWM step-down, 1.8V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
H18	-	RP111N181B	LVR-IC	LDO, 1.8V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H18	-	XC6220A08BMR	LVR-IC	LDO, 0.85V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H180X	-	VRH1802LT	LVR-IC	LDO, 1.8V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H185X	-	VRH1852LT	LVR-IC	LDO, 1.85V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H19	-	RP111N191B	LVR-IC	LDO, 1.9V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H19	-	XC6220A09BMR	LVR-IC	LDO, 0.95V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H190X	-	VRH1902LT	LVR-IC	LDO, 1.9V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H195X	-	VRH1951NT	LVR-IC	LDO, 1.95V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H1A	-	RP130N121B	LVR-IC	LDO, LN, +CE, 1.2V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1A	-	XC6220A10BMR	LVR-IC	LDO, 1.05V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1B	-	RP130N131B	LVR-IC	LDO, LN, +CE, 1.3V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1B	-	XC6220A11BMR	LVR-IC	LDO, 1.15V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1C	-	RP130N141B	LVR-IC	LDO, LN, +CE, 1.4V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1C	-	XC6220A12BMR	LVR-IC	LDO, 1.25V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1D	-	RP130N151B	LVR-IC	LDO, LN, +CE, 1.5V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1D	-	XC6220A13BMR	LVR-IC	LDO, 1.35V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1E	-	RP130N161B	LVR-IC	LDO, LN, +CE, 1.6V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1E	-	XC6220A14BMR	LVR-IC	LDO, 1.45V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1F	-	RP130N171B	LVR-IC	LDO, LN, +CE, 1.7V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1F	-	XC6220A15BMR	LVR-IC	LDO, 1.55V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1G	-	RP130N181B	LVR-IC	LDO, LN, +CE, 1.8V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1H	-	RP130N181B5	LVR-IC	LDO, LN, +CE, 1.85V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1H	-	XC6220A16BMR	LVR-IC	LDO, 1.65V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1J	-	RP130N191B	LVR-IC	LDO, LN, +CE, 1.9V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1K	-	RP130N201B	LVR-IC	LDO, LN, +CE, 2V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1K	-	XC6220A17BMR	LVR-IC	LDO, 1.75V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1L	-	RP130N211B	LVR-IC	LDO, LN, +CE, 2.1V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1L	-	XC6220A18BMR	LVR-IC	LDO, 1.85V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1M	-	RP130N221B	LVR-IC	LDO, LN, +CE, 2.2V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1M	-	XC6220A19BMR	LVR-IC	LDO, 1.95V±20mV, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1N	-	RP130N231B	LVR-IC	LDO, LN, +CE, 2.3V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1N	-	XC6220A20BMR	LVR-IC	LDO, 2.05V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1P	-	RP130N241B	LVR-IC	LDO, LN, +CE, 2.4V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1P	-	XC6220A21BMR	LVR-IC	LDO, 2.15V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1Q	-	RP130N251B	LVR-IC	LDO, LN, +CE, 2.5V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1R	-	RP130N261B	LVR-IC	LDO, LN, +CE, 2.6V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1R	-	XC6220A22BMR	LVR-IC	LDO, 2.25V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1S	-	RP130N271B	LVR-IC	LDO, LN, +CE, 2.7V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1S	-	XC6220A23BMR	LVR-IC	LDO, 2.35V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H1T	-	RP130N281B	LVR-IC	LDO, LN, +CE, 2.8V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1T	-	XC6220A24BMR	LVR-IC	LDO, 2.45V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1U	-	RP130N281B5	LVR-IC	LDO, LN, +CE, 2.85V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1U	-	XC6220A25BMR	LVR-IC	LDO, 2.55V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1V	-	RP130N291B	LVR-IC	LDO, LN, +CE, 2.9V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1V	-	XC6220A26BMR	LVR-IC	LDO, 2.65V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1W	-	RP130N301B	LVR-IC	LDO, LN, +CE, 3V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1X	-	RP130N311B	LVR-IC	LDO, LN, +CE, 3.1V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1X	-	XC6220A27BMR	LVR-IC	LDO, 2.75V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1Y	-	RP130N321B	LVR-IC	LDO, LN, +CE, 3.2V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1Y	-	XC6220A28BMR	LVR-IC	LDO, 2.85V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H1Z	-	RP130N331B	LVR-IC	LDO, LN, +CE, 3.3V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H1Z	-	XC6220A29BMR	LVR-IC	LDO, 2.95V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
h2	-	BD46E335G-M	Vdet-IC	3.3V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
H2	-	BL8555-12HQ	LVR-IC	LDO, 1.2V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H2	-	BL8555-12HRA	LVR-IC	LDO, 1.2V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H2	-	BL8555-12HRB	LVR-IC	LDO, 1.2V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H2	-	HD74HC1G08CM	CMOS-Log	2-input AND gate	CMPAK-5	28	Log3	6a	Ren
H2	-	HD74UH08EL	CMOS-Log	2-input AND gate	MPAK-5	28	Log3	6g	Ren
H2	-	LR8555-12HQ	LVR-IC	LDO, 1.2V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H2	-	LR8555-12HRA	LVR-IC	LDO, 1.2V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H2	-	LR8555-12HRB	LVR-IC	LDO, 1.2V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H2	-	MC74HC1G08DF	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6b	Ons
H2	-	MC74HC1G08DT	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6b	Ons
H2	-	R1111N421B	LVR-IC	LDO, Low noise, 4.2V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
H2	-	TC7SH08F	CMOS-Log	2-input AND gate	SSOP-5	28	Log3	6a	Tos
H2	-	TC7SH08FU	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6a	Tos
H2	ea	BL8555-12TQ	LVR-IC	LDO, 1.2V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H2	ea	BL8555-12TRA	LVR-IC	LDO, 1.2V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H2	ea	BL8555-12TRB	LVR-IC	LDO, 1.2V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H2	ea	LR8555-12TQ	LVR-IC	LDO, 1.2V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H2	ea	LR8555-12TRA	LVR-IC	LDO, 1.2V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H2	ea	LR8555-12TRB	LVR-IC	LDO, 1.2V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H2	eu	BL8555-22TQ	LVR-IC	LDO, 2.2V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H2	eu	BL8555-22TRA	LVR-IC	LDO, 2.2V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H2	eu	BL8555-22TRB	LVR-IC	LDO, 2.2V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H2	eu	LR8555-22TQ	LVR-IC	LDO, 2.2V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H2	eu	LR8555-22TRA	LVR-IC	LDO, 2.2V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H2	eu	LR8555-22TRB	LVR-IC	LDO, 2.2V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H2	fg	BL8555-32TQ	LVR-IC	LDO, 3.2V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H2	fg	BL8555-32TRA	LVR-IC	LDO, 3.2V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H2	fg	BL8555-32TRB	LVR-IC	LDO, 3.2V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H2	fg	LR8555-32TQ	LVR-IC	LDO, 3.2V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H2	fg	LR8555-32TRA	LVR-IC	LDO, 3.2V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H2	fg	LR8555-32TRB	LVR-IC	LDO, 3.2V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H2	fh	BL8555-42TQ	LVR-IC	LDO, 4.2V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H2	fh	BL8555-42TRA	LVR-IC	LDO, 4.2V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H2	fh	BL8555-42TRB	LVR-IC	LDO, 4.2V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H2	fh	LR8555-42TQ	LVR-IC	LDO, 4.2V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H2	fh	LR8555-42TRA	LVR-IC	LDO, 4.2V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H2	fh	LR8555-42TRB	LVR-IC	LDO, 4.2V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H2	fk	BL8555-32HQ	LVR-IC	LDO, 3.2V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H2	fk	BL8555-32HRA	LVR-IC	LDO, 3.2V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H2	fk	BL8555-32HRB	LVR-IC	LDO, 3.2V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H2	fk	LR8555-32HQ	LVR-IC	LDO, 3.2V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H2	fk	LR8555-32HRA	LVR-IC	LDO, 3.2V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H2	fk	LR8555-32HRB	LVR-IC	LDO, 3.2V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H2	fm	BL8555-42HQ	LVR-IC	LDO, 4.2V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H2	fm	BL8555-42HRA	LVR-IC	LDO, 4.2V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H2	fm	BL8555-42HRB	LVR-IC	LDO, 4.2V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H2	fm	LR8555-42HQ	LVR-IC	LDO, 4.2V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H2	fm	LR8555-42HRA	LVR-IC	LDO, 4.2V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H2	fm	LR8555-42HRB	LVR-IC	LDO, 4.2V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H2	fp	BL8555-22HQ	LVR-IC	LDO, 2.2V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H2	fp	BL8555-22HRA	LVR-IC	LDO, 2.2V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H2	fp	BL8555-22HRB	LVR-IC	LDO, 2.2V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H2	fp	LR8555-22HQ	LVR-IC	LDO, 2.2V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H2	fp	LR8555-22HRA	LVR-IC	LDO, 2.2V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H2	fp	LR8555-22HRB	LVR-IC	LDO, 2.2V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H20	-	RP111N201B	LVR-IC	LDO, 2.0V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H20	-	XC6220A301MR	LVR-IC	LDO, 3.0V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H200X	-	VRH2001NT	LVR-IC	LDO, 2.0V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H205X	-	VRH2051NT	LVR-IC	LDO, 2.05V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H21	-	RP111N211B	LVR-IC	LDO, 2.1V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H21	-	XC6220A311MR	LVR-IC	LDO, 3.1V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H210X	-	VRH2101NT	LVR-IC	LDO, 2.1V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H215X	-	VRH2151NT	LVR-IC	LDO, 2.15V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H22	-	RP111N221B	LVR-IC	LDO, 2.2V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H22	-	XC6220A321MR	LVR-IC	LDO, 3.2V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H220X	-	VRH2201NT	LVR-IC	LDO, 2.2V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H225X	-	VRH2251NT	LVR-IC	LDO, 2.25V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H23	-	RP111N231B	LVR-IC	LDO, 2.3V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H23	-	XC6220A331MR	LVR-IC	LDO, 3.3V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H230X	-	VRH2301NT	LVR-IC	LDO, 2.3V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H235X	-	VRH2351NT	LVR-IC	LDO, 2.35V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H24	-	RP111N241B	LVR-IC	LDO, 2.4V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H24	-	XC6220A341MR	LVR-IC	LDO, 3.4V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H240X	-	VRH2401NT	LVR-IC	LDO, 2.4V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H245X	-	VRH2451NT	LVR-IC	LDO, 2.45V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H25	-	74HC1G125GV	CMOS-Log	Bus buffer gate with 3-state output	SOT753	28	Log14	6a	Nxp
H25	-	R1224N252H	DC-DC-IC	PWM step-down, 2.5V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
H25	-	RP111N251B	LVR-IC	LDO, 2.5V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H25	-	SN74AUP1G125DBV	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log14	6g	Ti
H25	-	XC6220A351MR	LVR-IC	LDO, 3.5V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H250X	-	VRH2501NT	LVR-IC	LDO, 2.5V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H255X	-	VRH2551NT	LVR-IC	LDO, 2.55V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H26	-	74HC1G126GV	CMOS-Log	Bus buffer gate with 3-state output	SOT753	28	Log13	6a	Nxp
H26	-	RP111N261B	LVR-IC	LDO, 2.6V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H26	-	SN74AUP1G126DBV	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log13	6g	Ti
H26	-	XC6220A361MR	LVR-IC	LDO, 3.6V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H260X	-	VRH2601NT	LVR-IC	LDO, 2.6V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H265X	-	VRH2651NT	LVR-IC	LDO, 2.65V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H27	-	RP111N271B	LVR-IC	LDO, 2.7V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H27	-	XC6220A371MR	LVR-IC	LDO, 3.7V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H270X	-	VRH2701NT	LVR-IC	LDO, 2.7V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H275X	-	VRH2751NT	LVR-IC	LDO, 2.75V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H28	-	RP111N281B	LVR-IC	LDO, 2.8V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H28	-	XC6220A381MR	LVR-IC	LDO, 3.8V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H280X	-	VRH2801NT	LVR-IC	LDO, 2.8V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H285X	-	VRH2851NT	LVR-IC	LDO, 2.85V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H29	-	RP111N291B	LVR-IC	LDO, 2.9V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H29	-	XC6220A391MR	LVR-IC	LDO, 3.9V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H290X	-	VRH2901NT	LVR-IC	LDO, 2.9V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H295X	-	VRH2951NT	LVR-IC	LDO, 2.95V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H2A	-	RP130N121D	LVR-IC	LDO, LN, +CE, CL, 1.2V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2A	-	XC6220A401MR	LVR-IC	LDO, 4.0V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H2B	-	RP130N131D	LVR-IC	LDO, LN, +CE, CL, 1.3V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2B	-	XC6220A411MR	LVR-IC	LDO, 4.1V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H2C	-	RP130N141D	LVR-IC	LDO, LN, +CE, CL, 1.4V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2C	-	XC6220A421MR	LVR-IC	LDO, 4.2V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H2D	-	RP130N151D	LVR-IC	LDO, LN, +CE, CL, 1.5V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2D	-	XC6220A431MR	LVR-IC	LDO, 4.3V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H2E	-	RP130N161D	LVR-IC	LDO, LN, +CE, CL, 1.6V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2E	-	XC6220A441MR	LVR-IC	LDO, 4.4V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H2F	-	RP130N171D	LVR-IC	LDO, LN, +CE, CL, 1.7V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2F	-	XC6220A451MR	LVR-IC	LDO, 4.5V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H2G	-	RP130N181D	LVR-IC	LDO, LN, +CE, CL, 1.8V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2H	-	RP130N181D5	LVR-IC	LDO, LN, +CE, CL, 1.85V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2H	-	XC6220A461MR	LVR-IC	LDO, 4.6V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H2J	-	RP130N191D	LVR-IC	LDO, LN, +CE, CL, 1.9V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2K	-	RP130N201D	LVR-IC	LDO, LN, +CE, CL, 2V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2K	-	XC6220A471MR	LVR-IC	LDO, 4.7V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H2L	-	RP130N211D	LVR-IC	LDO, LN, +CE, CL, 2.1V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2L	-	XC6220A481MR	LVR-IC	LDO, 4.8V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H2M	-	RP130N221D	LVR-IC	LDO, LN, +CE, CL, 2.2V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2M	-	XC6220A491MR	LVR-IC	LDO, 4.9V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H2N	-	RP130N231D	LVR-IC	LDO, LN, +CE, CL, 2.3V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2N	-	XC6220A501MR	LVR-IC	LDO, 5.0V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H2P	-	RP130N241D	LVR-IC	LDO, LN, +CE, CL, 2.4V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2Q	-	RP130N251D	LVR-IC	LDO, LN, +CE, CL, 2.5V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H2R	-	RP130N261D	LVR-IC	LDO, LN, +CE, CL, 2.6V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2S	-	RP130N271D	LVR-IC	LDO, LN, +CE, CL, 2.7V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2T	-	RP130N281D	LVR-IC	LDO, LN, +CE, CL, 2.8V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2U	-	RP130N281D5	LVR-IC	LDO, LN, +CE, CL, 2.85V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2V	-	RP130N291D	LVR-IC	LDO, LN, +CE, CL, 2.9V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2W	-	RP130N301D	LVR-IC	LDO, LN, +CE, CL, 3V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2X	-	RP130N311D	LVR-IC	LDO, LN, +CE, CL, 3.1V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2Y	-	RP130N321D	LVR-IC	LDO, LN, +CE, CL, 3.2V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
H2Z	-	RP130N331D	LVR-IC	LDO, LN, +CE, CL, 3.3V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
h3	-	BD46E345G-M	Vdet-IC	3.4V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
H3	-	BL8555-13HQ	LVR-IC	LDO, 1.3V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H3	-	BL8555-13HRA	LVR-IC	LDO, 1.3V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H3	-	BL8555-13HRB	LVR-IC	LDO, 1.3V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H3	-	HD74HC1G02CM	CMOS-Log	2-input NOR gate	CMPAK-5	28	Log2	6a	Ren
H3	-	HD74UH02EL	CMOS-Log	2-input NOR gate	MPAK-5	28	Log2	6g	Ren
H3	-	LR8555-13HQ	LVR-IC	LDO, 1.3V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H3	-	LR8555-13HRA	LVR-IC	LDO, 1.3V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H3	-	LR8555-13HRB	LVR-IC	LDO, 1.3V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H3	-	MC74HC1G02DF	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6b	Ons
H3	-	MC74HC1G02DT	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6b	Ons
H3	-	R1111N431B	LVR-IC	LDO, Low noise, 4.3V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
H3	-	TC7SH02F	CMOS-Log	2-input NOR gate	SSOP-5	28	Log2	6a	Tos
H3	-	TC7SH02FU	CMOS-Log	2-input NOR gate	SC-70-5	28	Log2	6a	Tos
H3	ea	BL8555-13TQ	LVR-IC	LDO, 1.3V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H3	ea	BL8555-13TRA	LVR-IC	LDO, 1.3V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H3	ea	BL8555-13TRB	LVR-IC	LDO, 1.3V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H3	ea	LR8555-13TQ	LVR-IC	LDO, 1.3V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H3	ea	LR8555-13TRA	LVR-IC	LDO, 1.3V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H3	ea	LR8555-13TRB	LVR-IC	LDO, 1.3V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H3	eu	BL8555-23TQ	LVR-IC	LDO, 2.3V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H3	eu	BL8555-23TRA	LVR-IC	LDO, 2.3V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H3	eu	BL8555-23TRB	LVR-IC	LDO, 2.3V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H3	eu	LR8555-23TQ	LVR-IC	LDO, 2.3V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H3	eu	LR8555-23TRA	LVR-IC	LDO, 2.3V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H3	eu	LR8555-23TRB	LVR-IC	LDO, 2.3V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H3	fg	BL8555-33TQ	LVR-IC	LDO, 3.3V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H3	fg	BL8555-33TRB	LVR-IC	LDO, 3.3V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H3	fg	BL8555-33YRA	LVR-IC	LDO, 3.3V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H3	fg	LR8555-33TQ	LVR-IC	LDO, 3.3V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H3	fg	LR8555-33TRB	LVR-IC	LDO, 3.3V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H3	fg	LR8555-33YRA	LVR-IC	LDO, 3.3V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H3	fh	BL8555-43TQ	LVR-IC	LDO, 4.3V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H3	fh	BL8555-43TRA	LVR-IC	LDO, 4.3V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H3	fh	BL8555-43TRB	LVR-IC	LDO, 4.3V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H3	fh	LR8555-43TQ	LVR-IC	LDO, 4.3V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H3	fh	LR8555-43TRA	LVR-IC	LDO, 4.3V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H3	fh	LR8555-43TRB	LVR-IC	LDO, 4.3V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H3	fk	BL8555-33HQ	LVR-IC	LDO, 3.3V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H3	fk	BL8555-33HRA	LVR-IC	LDO, 3.3V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H3	fk	BL8555-33HRB	LVR-IC	LDO, 3.3V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H3	fk	LR8555-33HQ	LVR-IC	LDO, 3.3V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H3	fk	LR8555-33HRA	LVR-IC	LDO, 3.3V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H3	fk	LR8555-33HRB	LVR-IC	LDO, 3.3V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H3	fm	BL8555-43HQ	LVR-IC	LDO, 4.3V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H3	fm	BL8555-43HRA	LVR-IC	LDO, 4.3V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H3	fm	BL8555-43HRB	LVR-IC	LDO, 4.3V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H3	fm	LR8555-43HQ	LVR-IC	LDO, 4.3V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H3	fm	LR8555-43HRA	LVR-IC	LDO, 4.3V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H3	fm	LR8555-43HRB	LVR-IC	LDO, 4.3V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H3	fp	BL8555-23HQ	LVR-IC	LDO, 2.3V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H3	fp	BL8555-23HRA	LVR-IC	LDO, 2.3V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H3	fp	BL8555-23HRB	LVR-IC	LDO, 2.3V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H3	fp	LR8555-23HQ	LVR-IC	LDO, 2.3V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H3	fp	LR8555-23HRA	LVR-IC	LDO, 2.3V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H3	fp	LR8555-23HRB	LVR-IC	LDO, 2.3V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H30	-	R1224N302H	DC-DC-IC	PWM step-down, 3V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
H30	-	RP111N301B	LVR-IC	LDO, 3.0V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H30	-	XC6220A30BMR	LVR-IC	LDO, 3.05V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H300X	-	VRH3001NT	LVR-IC	LDO, 3.0V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H305X	-	VRH3051NT	LVR-IC	LDO, 3.05V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H31	-	RP111N311B	LVR-IC	LDO, 3.1V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H31	-	XC6220A31BMR	LVR-IC	LDO, 3.15V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H310X	-	VRH3101NT	LVR-IC	LDO, 3.1V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H315X	-	VRH3151NT	LVR-IC	LDO, 3.15V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H32	-	74HC1G32GV	CMOS-Log	2-input OR gate	SOT753	28	Log4	6a	Nxp
H32	-	RP111N321B	LVR-IC	LDO, 3.2V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H32	-	SN74AUP1G32DBV	CMOS-Log	2-input OR gate	SOT-23-5	28	Log4	6g	Ti
H32	-	U7SH32-AF5	CMOS-Log	2-input OR gate	SOT-23-5	28	Log4	6a	Utc
H32	-	U7SH32-AL5	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6a	Utc
H32	-	XC6220A32BMR	LVR-IC	LDO, 3.25V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H320X	-	VRH3201NT	LVR-IC	LDO, 3.2V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H325X	-	VRH3251NT	LVR-IC	LDO, 3.25V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H32L	-	U7SH32L-AF5	CMOS-Log	2-input OR gate	SOT-23-5	28	Log4	6a	Utc
H32L	-	U7SH32L-AL5	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6a	Utc
H33	-	R1224N332H	DC-DC-IC	PWM step-down, 3.3V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
H33	-	RP111N331B	LVR-IC	LDO, 3.3V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H33	-	XC6220A33BMR	LVR-IC	LDO, 3.35V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H330X	-	VRH3301NT	LVR-IC	LDO, 3.3V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H335X	-	VRH3351NT	LVR-IC	LDO, 3.35V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H34	-	RP111N341B	LVR-IC	LDO, 3.4V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H34	-	SN74AUP1G34DBV	CMOS-Log	Noninverting buffer	SOT-23-5	28	Log10	6g	Ti
H34	-	XC6220A34BMR	LVR-IC	LDO, 3.45V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H340X	-	VRH3401NT	LVR-IC	LDO, 3.4V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H345X	-	VRH3451NT	LVR-IC	LDO, 3.45V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H35	-	RP111N351B	LVR-IC	LDO, 3.5V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H35	-	XC6220A35BMR	LVR-IC	LDO, 3.55V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H350X	-	VRH3501NT	LVR-IC	LDO, 3.5V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H355X	-	VRH3551NT	LVR-IC	LDO, 3.55V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H36	-	RP111N361B	LVR-IC	LDO, 3.6V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H36	-	XC6220A36BMR	LVR-IC	LDO, 3.65V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H360X	-	VRH3601NT	LVR-IC	LDO, 3.6V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H365X	-	VRH3651NT	LVR-IC	LDO, 3.65V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H37	-	RP111N071B5	LVR-IC	LDO, 0.75V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H37	-	XC6220A37BMR	LVR-IC	LDO, 3.75V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H370X	-	VRH3701NT	LVR-IC	LDO, 3.7V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H375X	-	VRH3751NT	LVR-IC	LDO, 3.75V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H38	-	RP111N121B5	LVR-IC	LDO, 1.25V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H38	-	XC6220A38BMR	LVR-IC	LDO, 3.85V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H380X	-	VRH3801NT	LVR-IC	LDO, 3.8V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H385X	-	VRH3851NT	LVR-IC	LDO, 3.85V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H39	-	RP111N181B5	LVR-IC	LDO, 1.85V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H39	-	XC6220A39BMR	LVR-IC	LDO, 3.95V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H390X	-	VRH3901NT	LVR-IC	LDO, 3.9V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H395X	-	VRH3951NT	LVR-IC	LDO, 3.95V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H3A	-	XC6220A40BMR	LVR-IC	LDO, 4.05V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H3B	-	XC6220A41BMR	LVR-IC	LDO, 4.15V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H3C	-	XC6220A42BMR	LVR-IC	LDO, 4.25V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H3D	-	XC6220A43BMR	LVR-IC	LDO, 4.35V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H3E	-	XC6220A44BMR	LVR-IC	LDO, 4.45V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H3F	-	XC6220A45BMR	LVR-IC	LDO, 4.55V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H3H	-	XC6220A46BMR	LVR-IC	LDO, 4.65V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H3K	-	XC6220A47BMR	LVR-IC	LDO, 4.75V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H3L	-	XC6220A48BMR	LVR-IC	LDO, 4.85V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
H3M	-	XC6220A49BMR	LVR-IC	LDO, 4.95V±1%, 1A, +CE	SOT-25	28cx	VR4	6g	Tor
h4	-	BD46E355G-M	Vdet-IC	3.5V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
H4	-	BL8555-14HQ	LVR-IC	LDO, 1.4V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H4	-	BL8555-14HRA	LVR-IC	LDO, 1.4V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H4	-	BL8555-14HRB	LVR-IC	LDO, 1.4V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H4	-	HD74HC1G32CM	CMOS-Log	2-input OR gate	CMPAK-5	28	Log4	6a	Ren
H4	-	HD74UH32EL	CMOS-Log	2-input OR gate	MPAK-5	28	Log4	6g	Ren
H4	-	LR8555-14HQ	LVR-IC	LDO, 1.4V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H4	-	LR8555-14HRA	LVR-IC	LDO, 1.4V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H4	-	LR8555-14HRB	LVR-IC	LDO, 1.4V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H4	-	MC74HC1G32DF	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6b	Ons
H4	-	MC74HC1G32DT	CMOS-Log	2-input OR gate	SOT-23-5	28	Log4	6b	Ons
H4	-	R1111N441B	LVR-IC	LDO, Low noise, 4.4V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
H4	-	TC7SH32F	CMOS-Log	2-input OR gate	SSOP-5	28	Log4	6a	Tos
H4	-	TC7SH32FU	CMOS-Log	2-input OR gate	SC-70-5	28	Log4	6a	Tos
H4	ea	BL8555-14TQ	LVR-IC	LDO, 1.4V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H4	ea	BL8555-14TRA	LVR-IC	LDO, 1.4V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H4	ea	BL8555-14TRB	LVR-IC	LDO, 1.4V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H4	ea	LR8555-14TQ	LVR-IC	LDO, 1.4V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H4	ea	LR8555-14TRA	LVR-IC	LDO, 1.4V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H4	ea	LR8555-14TRB	LVR-IC	LDO, 1.4V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H4	eu	BL8555-24TQ	LVR-IC	LDO, 2.4V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H4	eu	BL8555-24TRA	LVR-IC	LDO, 2.4V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H4	eu	BL8555-24TRB	LVR-IC	LDO, 2.4V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H4	eu	LR8555-24TQ	LVR-IC	LDO, 2.4V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H4	eu	LR8555-24TRA	LVR-IC	LDO, 2.4V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H4	eu	LR8555-24TRB	LVR-IC	LDO, 2.4V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H4	fg	BL8555-34TQ	LVR-IC	LDO, 3.4V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H4	fg	BL8555-34TRA	LVR-IC	LDO, 3.4V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H4	fg	BL8555-34TRB	LVR-IC	LDO, 3.4V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H4	fg	LR8555-34TQ	LVR-IC	LDO, 3.4V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H4	fg	LR8555-34TRA	LVR-IC	LDO, 3.4V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H4	fg	LR8555-34TRB	LVR-IC	LDO, 3.4V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H4	fh	BL8555-44TQ	LVR-IC	LDO, 4.4V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H4	fh	BL8555-44TRA	LVR-IC	LDO, 4.4V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H4	fh	BL8555-44TRB	LVR-IC	LDO, 4.4V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H4	fh	LR8555-44TQ	LVR-IC	LDO, 4.4V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H4	fh	LR8555-44TRA	LVR-IC	LDO, 4.4V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H4	fh	LR8555-44TRB	LVR-IC	LDO, 4.4V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H4	fk	BL8555-34HQ	LVR-IC	LDO, 3.4V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H4	fk	BL8555-34HRB	LVR-IC	LDO, 3.4V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H4	fk	BL8555-34PHA	LVR-IC	LDO, 3.4V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H4	fk	LR8555-34HQ	LVR-IC	LDO, 3.4V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H4	fk	LR8555-34HRB	LVR-IC	LDO, 3.4V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H4	fk	LR8555-34PHA	LVR-IC	LDO, 3.4V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H4	fm	BL8555-44HQ	LVR-IC	LDO, 4.4V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H4	fm	BL8555-44HRA	LVR-IC	LDO, 4.4V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H4	fm	BL8555-44HRB	LVR-IC	LDO, 4.4V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H4	fm	LR8555-44HQ	LVR-IC	LDO, 4.4V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H4	fm	LR8555-44HRA	LVR-IC	LDO, 4.4V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H4	fm	LR8555-44HRB	LVR-IC	LDO, 4.4V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H4	fp	BL8555-24HQ	LVR-IC	LDO, 2.4V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H4	fp	BL8555-24HRA	LVR-IC	LDO, 2.4V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H4	fp	BL8555-24HRB	LVR-IC	LDO, 2.4V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H4	fp	LR8555-24HQ	LVR-IC	LDO, 2.4V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H4	fp	LR8555-24HRA	LVR-IC	LDO, 2.4V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H4	fp	LR8555-24HRB	LVR-IC	LDO, 2.4V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H40	-	RP111N281B5	LVR-IC	LDO, 2.85V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H40	-	SN74AUP1G240DBV	CMOS-Log	Bus buffer inverted with 3–state output	SOT-23-5	28	Log22	6g	Ti
H400X	-	VRH4001NT	LVR-IC	LDO, 4.0V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H405X	-	VRH4051NT	LVR-IC	LDO, 4.05V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H41	-	RP111N101B5	LVR-IC	LDO, 1.05V±0.8%, 500mA, +CE	SOT-23-5	28s0	VR6a	6g	Ric
H410X	-	VRH4101NT	LVR-IC	LDO, 4.1V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H415X	-	VRH4151NT	LVR-IC	LDO, 4.15V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H420X	-	VRH4201NT	LVR-IC	LDO, 4.2V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H425X	-	VRH4251NT	LVR-IC	LDO, 4.25V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H430X	-	VRH4301NT	LVR-IC	LDO, 4.3V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H435X	-	VRH4351NT	LVR-IC	LDO, 4.35V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H440X	-	VRH4401NT	LVR-IC	LDO, 4.4V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H445X	-	VRH4451NT	LVR-IC	LDO, 4.45V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H450X	-	VRH4501NT	LVR-IC	LDO, 4.5V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H455X	-	VRH4551NT	LVR-IC	LDO, 4.55V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H460X	-	VRH4601NT	LVR-IC	LDO, 4.6V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H465X	-	VRH4651NT	LVR-IC	LDO, 4.65V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H470X	-	VRH4701NT	LVR-IC	LDO, 4.7V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H475X	-	VRH4751NT	LVR-IC	LDO, 4.75V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H48	-	XC6220B081MR	LVR-IC	LDO, 0.8V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H480X	-	VRH4801NT	LVR-IC	LDO, 4.8V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H485X	-	VRH4851NT	LVR-IC	LDO, 4.85V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H49	-	XC6220B091MR	LVR-IC	LDO, 0.9V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H490X	-	VRH4901NT	LVR-IC	LDO, 4.9V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H495X	-	VRH4951NT	LVR-IC	LDO, 4.95V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H4A	-	XC6220B101MR	LVR-IC	LDO, 1.0V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4B	-	XC6220B111MR	LVR-IC	LDO, 1.1V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4C	-	XC6220B121MR	LVR-IC	LDO, 1.2V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4D	-	XC6220B131MR	LVR-IC	LDO, 1.3V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4E	-	XC6220B141MR	LVR-IC	LDO, 1.4V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H4F	-	XC6220B151MR	LVR-IC	LDO, 1.5V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4H	-	XC6220B161MR	LVR-IC	LDO, 1.6V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4K	-	XC6220B171MR	LVR-IC	LDO, 1.7V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4L	-	XC6220B181MR	LVR-IC	LDO, 1.8V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4M	-	XC6220B191MR	LVR-IC	LDO, 1.9V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4N	-	XC6220B201MR	LVR-IC	LDO, 2.0V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4P	-	XC6220B211MR	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4R	-	XC6220B221MR	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4S	-	XC6220B231MR	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4T	-	XC6220B241MR	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4U	-	XC6220B251MR	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4V	-	XC6220B261MR	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4X	-	XC6220B271MR	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4Y	-	XC6220B281MR	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H4Z	-	XC6220B291MR	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
h5	-	BD46E365G-M	Vdet-IC	3.6V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
H5	-	BL8555-15HQ	LVR-IC	LDO, 1.5V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H5	-	BL8555-15HRA	LVR-IC	LDO, 1.5V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H5	-	BL8555-15HRB	LVR-IC	LDO, 1.5V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H5	-	HD74HC1G04CM	CMOS-Log	Inverter	CMPAK-5	28	Log6	6a	Ren
H5	-	HD74UH04EL	CMOS-Log	Inverter	MPAK-5	28	Log6	6g	Ren
H5	-	LR8555-15HQ	LVR-IC	LDO, 1.5V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H5	-	LR8555-15HRA	LVR-IC	LDO, 1.5V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H5	-	LR8555-15HRB	LVR-IC	LDO, 1.5V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H5	-	MC74HC1G04DF	CMOS-Log	Inverter	SOT-353	28	Log6	6b	Ons
H5	-	MC74HC1G04DT	CMOS-Log	Inverter	SOT-23-5	28	Log6	6b	Ons
H5	-	R1111N451B	LVR-IC	LDO, Low noise, 4.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
H5	-	TC7SH04F	CMOS-Log	Inverter	SSOP-5	28	Log6	6a	Tos
H5	-	TC7SH04FU	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	Tos
H5	ea	BL8555-15TQ	LVR-IC	LDO, 1.5V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H5	ea	BL8555-15TRA	LVR-IC	LDO, 1.5V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H5	ea	BL8555-15TRB	LVR-IC	LDO, 1.5V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H5	ea	LR8555-15TQ	LVR-IC	LDO, 1.5V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H5	ea	LR8555-15TRA	LVR-IC	LDO, 1.5V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H5	ea	LR8555-15TRB	LVR-IC	LDO, 1.5V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H5	eu	BL8555-25TQ	LVR-IC	LDO, 2.5V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H5	eu	BL8555-25TRA	LVR-IC	LDO, 2.5V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H5	eu	BL8555-25TRB	LVR-IC	LDO, 2.5V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H5	eu	LR8555-25TQ	LVR-IC	LDO, 2.5V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H5	eu	LR8555-25TRA	LVR-IC	LDO, 2.5V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H5	eu	LR8555-25TRB	LVR-IC	LDO, 2.5V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H5	fg	BL8555-35TQ	LVR-IC	LDO, 3.5V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H5	fg	BL8555-35TRA	LVR-IC	LDO, 3.5V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H5	fg	BL8555-35TRB	LVR-IC	LDO, 3.5V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H5	fg	LR8555-35TQ	LVR-IC	LDO, 3.5V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H5	fg	LR8555-35TRA	LVR-IC	LDO, 3.5V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H5	fg	LR8555-35TRB	LVR-IC	LDO, 3.5V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H5	fh	BL8555-45TQ	LVR-IC	LDO, 4.5V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H5	fh	BL8555-45TRA	LVR-IC	LDO, 4.5V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H5	fh	BL8555-45TRB	LVR-IC	LDO, 4.5V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H5	fh	LR8555-45TQ	LVR-IC	LDO, 4.5V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H5	fh	LR8555-45TRA	LVR-IC	LDO, 4.5V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H5	fh	LR8555-45TRB	LVR-IC	LDO, 4.5V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H5	fk	BL8555-35HQ	LVR-IC	LDO, 3.5V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H5	fk	BL8555-35HRA	LVR-IC	LDO, 3.5V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H5	fk	BL8555-35HRB	LVR-IC	LDO, 3.5V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H5	fk	LR8555-35HQ	LVR-IC	LDO, 3.5V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H5	fk	LR8555-35HRA	LVR-IC	LDO, 3.5V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H5	fk	LR8555-35HRB	LVR-IC	LDO, 3.5V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H5	fm	BL8555-45HQ	LVR-IC	LDO, 4.5V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H5	fm	BL8555-45HRA	LVR-IC	LDO, 4.5V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H5	fm	BL8555-45HRB	LVR-IC	LDO, 4.5V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H5	fm	LR8555-45HQ	LVR-IC	LDO, 4.5V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H5	fm	LR8555-45HRA	LVR-IC	LDO, 4.5V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H5	fm	LR8555-45HRB	LVR-IC	LDO, 4.5V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H5	fp	BL8555-25HQ	LVR-IC	LDO, 2.5V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H5	fp	BL8555-25HRA	LVR-IC	LDO, 2.5V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H5	fp	BL8555-25HRB	LVR-IC	LDO, 2.5V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H5	fp	LR8555-25HQ	LVR-IC	LDO, 2.5V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H5	fp	LR8555-25HRA	LVR-IC	LDO, 2.5V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H5	fp	LR8555-25HRB	LVR-IC	LDO, 2.5V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H50	-	R1224N502H	DC-DC-IC	PWM step-down, 5V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
H500X	-	VRH5001NT	LVR-IC	LDO, 5.0V±1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
H55	-	R1224N552H	DC-DC-IC	PWM step-down, 5.5V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
H58	-	SN74AUP1G58DBV	CMOS-Log	Configurable multiple-function gate	SOT-23-5	28	Log37	6g	Ti
H58	-	XC6220B08BMR	LVR-IC	LDO, 0.85V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H59	-	XC6220B09BMR	LVR-IC	LDO, 0.95V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5A	-	XC6220B10BMR	LVR-IC	LDO, 1.05V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5B	-	XC6220B11BMR	LVR-IC	LDO, 1.15V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5C	-	XC6220B12BMR	LVR-IC	LDO, 1.25V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5D	-	XC6220B13BMR	LVR-IC	LDO, 1.35V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5E	-	XC6220B14BMR	LVR-IC	LDO, 1.45V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5F	-	XC6220B15BMR	LVR-IC	LDO, 1.55V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5H	-	XC6220B16BMR	LVR-IC	LDO, 1.65V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5K	-	XC6220B17BMR	LVR-IC	LDO, 1.75V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5L	-	XC6220B18BMR	LVR-IC	LDO, 1.85V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5M	-	XC6220B19BMR	LVR-IC	LDO, 1.95V±20mV, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5N	-	XC6220B20BMR	LVR-IC	LDO, 2.05V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5P	-	XC6220B21BMR	LVR-IC	LDO, 2.15V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5R	-	XC6220B22BMR	LVR-IC	LDO, 2.25V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5S	-	XC6220B23BMR	LVR-IC	LDO, 2.35V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5T	-	XC6220B24BMR	LVR-IC	LDO, 2.45V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5U	-	XC6220B25BMR	LVR-IC	LDO, 2.55V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5V	-	XC6220B26BMR	LVR-IC	LDO, 2.65V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5X	-	XC6220B27BMR	LVR-IC	LDO, 2.75V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5Y	-	XC6220B28BMR	LVR-IC	LDO, 2.85V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H5Z	-	XC6220B29BMR	LVR-IC	LDO, 2.95V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
h6	-	BD46E375G-M	Vdet-IC	3.7V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
H6	-	BL8555-16HQ	LVR-IC	LDO, 1.6V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H6	-	BL8555-16HRA	LVR-IC	LDO, 1.6V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H6	-	BL8555-16HRB	LVR-IC	LDO, 1.6V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H6	-	HD74HC1GU04CM	CMOS-Log	Inverter	CMPAK-5	28	Log6	6a	Ren
H6	-	LR8555-16HQ	LVR-IC	LDO, 1.6V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H6	-	LR8555-16HRA	LVR-IC	LDO, 1.6V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H6	-	LR8555-16HRB	LVR-IC	LDO, 1.6V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H6	-	MC74HC1GU04DF	CMOS-Log	Inverter	SOT-353	28	Log6	6b	Ons
H6	-	MC74HC1GU04DT	CMOS-Log	Inverter	SOT-23-5	28	Log6	6b	Ons
H6	-	R1111N461B	LVR-IC	LDO, Low noise, 4.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
H6	-	TC7SHU04F	CMOS-Log	Inverter	SSOP-5	28	Log6	6a	Tos
H6	-	TC7SHU04FU	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	Tos
H6	ea	BL8555-16TQ	LVR-IC	LDO, 1.6V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H6	ea	BL8555-16TRA	LVR-IC	LDO, 1.6V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H6	ea	BL8555-16TRB	LVR-IC	LDO, 1.6V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H6	ea	LR8555-16TQ	LVR-IC	LDO, 1.6V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H6	ea	LR8555-16TRA	LVR-IC	LDO, 1.6V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H6	ea	LR8555-16TRB	LVR-IC	LDO, 1.6V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H6	eu	BL8555-26TQ	LVR-IC	LDO, 2.6V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H6	eu	BL8555-26TRA	LVR-IC	LDO, 2.6V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H6	eu	BL8555-26TRB	LVR-IC	LDO, 2.6V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H6	eu	LR8555-26TQ	LVR-IC	LDO, 2.6V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H6	eu	LR8555-26TRA	LVR-IC	LDO, 2.6V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H6	eu	LR8555-26TRB	LVR-IC	LDO, 2.6V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H6	fg	BL8555-36TQ	LVR-IC	LDO, 3.6V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H6	fg	BL8555-36TRA	LVR-IC	LDO, 3.6V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H6	fg	BL8555-36TRB	LVR-IC	LDO, 3.6V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H6	fg	LR8555-36TQ	LVR-IC	LDO, 3.6V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H6	fg	LR8555-36TRA	LVR-IC	LDO, 3.6V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H6	fg	LR8555-36TRB	LVR-IC	LDO, 3.6V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H6	fh	BL8555-46TQ	LVR-IC	LDO, 4.6V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H6	fh	BL8555-46TRA	LVR-IC	LDO, 4.6V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H6	fh	BL8555-46TRB	LVR-IC	LDO, 4.6V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H6	fh	LR8555-46TQ	LVR-IC	LDO, 4.6V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H6	fh	LR8555-46TRA	LVR-IC	LDO, 4.6V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H6	fh	LR8555-46TRB	LVR-IC	LDO, 4.6V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H6	fk	BL8555-36HQ	LVR-IC	LDO, 3.6V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H6	fk	BL8555-36HRA	LVR-IC	LDO, 3.6V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H6	fk	BL8555-36HRB	LVR-IC	LDO, 3.6V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H6	fk	LR8555-36HQ	LVR-IC	LDO, 3.6V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H6	fk	LR8555-36HRA	LVR-IC	LDO, 3.6V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H6	fk	LR8555-36HRB	LVR-IC	LDO, 3.6V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H6	fm	BL8555-46HQ	LVR-IC	LDO, 4.6V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H6	fm	BL8555-46HRA	LVR-IC	LDO, 4.6V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H6	fm	BL8555-46HRB	LVR-IC	LDO, 4.6V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H6	fm	LR8555-46HQ	LVR-IC	LDO, 4.6V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H6	fm	LR8555-46HRA	LVR-IC	LDO, 4.6V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H6	fm	LR8555-46HRB	LVR-IC	LDO, 4.6V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H6	fp	BL8555-26HQ	LVR-IC	LDO, 2.6V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H6	fp	BL8555-26HRA	LVR-IC	LDO, 2.6V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H6	fp	BL8555-26HRB	LVR-IC	LDO, 2.6V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H6	fp	LR8555-26HQ	LVR-IC	LDO, 2.6V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H6	fp	LR8555-26HRA	LVR-IC	LDO, 2.6V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H6	fp	LR8555-26HRB	LVR-IC	LDO, 2.6V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H60	-	R1224N602H	DC-DC-IC	PWM step-down, 6V±2%, 500kHz	SOT-23-5	28ud	DC7	6g	Ric
H60	-	XC6220B301MR	LVR-IC	LDO, 3.0V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H61	-	XC6220B311MR	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H62	-	XC6220B321MR	LVR-IC	LDO, 3.2V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H63	-	XC6220B331MR	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H64	-	XC6220B341MR	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H65	-	XC6220B351MR	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H66	-	74HC1G66GV	CMOS-Log	Single-pole single-throw analog switch	SOT753	28	Log16	6a	Nxp
H66	-	XC6220B361MR	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H67	-	XC6220B371MR	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H68	-	XC6220B381MR	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H69	-	XC6220B391MR	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H6A	-	XC6220B401MR	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H6B	-	XC6220B411MR	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H6C	-	XC6220B421MR	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H6D	-	XC6220B431MR	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H6E	-	XC6220B441MR	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H6F	-	XC6220B451MR	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H6H	-	XC6220B461MR	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H6K	-	XC6220B471MR	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H6L	-	XC6220B481MR	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H6M	-	XC6220B491MR	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H6N	-	XC6220B501MR	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
h7	-	BD46E385G-M	Vdet-IC	3.8V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
H7	-	BL8555-17HQ	LVR-IC	LDO, 1.7V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H7	-	BL8555-17HRA	LVR-IC	LDO, 1.7V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H7	-	BL8555-17HRB	LVR-IC	LDO, 1.7V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H7	-	LR8555-17HQ	LVR-IC	LDO, 1.7V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H7	-	LR8555-17HRA	LVR-IC	LDO, 1.7V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H7	-	LR8555-17HRB	LVR-IC	LDO, 1.7V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H7	-	R1111N471B	LVR-IC	LDO, Low noise, 4.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
H7	-	SN74AUP1G17DCK	CMOS-Log	Schmitt-trigger	SC-70-5	28	Log11	6g	Ti
H7	-	SN74AUP1G17DRL	CMOS-Log	Schmitt-trigger	SOT-553	30	Log11	6g	Ti
H7	ea	BL8555-17TQ	LVR-IC	LDO, 1.7V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H7	ea	BL8555-17TRA	LVR-IC	LDO, 1.7V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H7	ea	BL8555-17TRB	LVR-IC	LDO, 1.7V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H7	ea	LR8555-17TQ	LVR-IC	LDO, 1.7V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H7	ea	LR8555-17TRA	LVR-IC	LDO, 1.7V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H7	ea	LR8555-17TRB	LVR-IC	LDO, 1.7V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H7	eu	BL8555-27TQ	LVR-IC	LDO, 2.7V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H7	eu	BL8555-27TRA	LVR-IC	LDO, 2.7V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H7	eu	BL8555-27TRB	LVR-IC	LDO, 2.7V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H7	eu	LR8555-27TQ	LVR-IC	LDO, 2.7V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H7	eu	LR8555-27TRA	LVR-IC	LDO, 2.7V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H7	eu	LR8555-27TRB	LVR-IC	LDO, 2.7V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H7	fg	BL8555-37TQ	LVR-IC	LDO, 3.7V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H7	fg	BL8555-37TRA	LVR-IC	LDO, 3.7V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H7	fg	BL8555-37TRB	LVR-IC	LDO, 3.7V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H7	fg	LR8555-37TQ	LVR-IC	LDO, 3.7V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H7	fg	LR8555-37TRA	LVR-IC	LDO, 3.7V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H7	fg	LR8555-37TRB	LVR-IC	LDO, 3.7V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H7	fh	BL8555-47TQ	LVR-IC	LDO, 4.7V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H7	fh	BL8555-47TRA	LVR-IC	LDO, 4.7V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H7	fh	BL8555-47TRB	LVR-IC	LDO, 4.7V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H7	fh	LR8555-47TQ	LVR-IC	LDO, 4.7V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H7	fh	LR8555-47TRA	LVR-IC	LDO, 4.7V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H7	fh	LR8555-47TRB	LVR-IC	LDO, 4.7V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H7	fk	BL8555-37HQ	LVR-IC	LDO, 3.7V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H7	fk	BL8555-37HRA	LVR-IC	LDO, 3.7V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H7	fk	BL8555-37HRB	LVR-IC	LDO, 3.7V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H7	fk	LR8555-37HQ	LVR-IC	LDO, 3.7V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H7	fk	LR8555-37HRA	LVR-IC	LDO, 3.7V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H7	fk	LR8555-37HRB	LVR-IC	LDO, 3.7V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H7	fm	BL8555-47HQ	LVR-IC	LDO, 4.7V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H7	fm	BL8555-47HRA	LVR-IC	LDO, 4.7V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H7	fm	BL8555-47HRB	LVR-IC	LDO, 4.7V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H7	fm	LR8555-47HQ	LVR-IC	LDO, 4.7V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H7	fm	LR8555-47HRA	LVR-IC	LDO, 4.7V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H7	fm	LR8555-47HRB	LVR-IC	LDO, 4.7V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H7	fp	BL8555-27HQ	LVR-IC	LDO, 2.7V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H7	fp	BL8555-27HRA	LVR-IC	LDO, 2.7V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H7	fp	BL8555-27HRB	LVR-IC	LDO, 2.7V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H7	fp	LR8555-27HQ	LVR-IC	LDO, 2.7V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H7	fp	LR8555-27HRA	LVR-IC	LDO, 2.7V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H7	fp	LR8555-27HRB	LVR-IC	LDO, 2.7V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H70	-	XC6220B30BMR	LVR-IC	LDO, 3.05V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H71	-	XC6220B31BMR	LVR-IC	LDO, 3.15V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H72	-	XC6220B32BMR	LVR-IC	LDO, 3.25V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H73	-	XC6220B33BMR	LVR-IC	LDO, 3.35V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H74	-	XC6220B34BMR	LVR-IC	LDO, 3.45V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H75	-	XC6220B35BMR	LVR-IC	LDO, 3.55V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H76	-	XC6220B36BMR	LVR-IC	LDO, 3.65V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H77	-	XC6220B37BMR	LVR-IC	LDO, 3.75V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H78	-	XC6220B38BMR	LVR-IC	LDO, 3.85V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H79	-	SN74AUP1G79DBV	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT-23-5	28	Log20	6g	Ti
H79	-	XC6220B39BMR	LVR-IC	LDO, 3.95V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H7A	-	XC6220B40BMR	LVR-IC	LDO, 4.05V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H7B	-	XC6220B41BMR	LVR-IC	LDO, 4.15V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H7C	-	XC6220B42BMR	LVR-IC	LDO, 4.25V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H7D	-	XC6220B43BMR	LVR-IC	LDO, 4.35V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H7E	-	XC6220B44BMR	LVR-IC	LDO, 4.45V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H7F	-	XC6220B45BMR	LVR-IC	LDO, 4.55V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H7H	-	XC6220B46BMR	LVR-IC	LDO, 4.65V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H7K	-	XC6220B47BMR	LVR-IC	LDO, 4.75V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H7L	-	XC6220B48BMR	LVR-IC	LDO, 4.85V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
H7M	-	XC6220B49BMR	LVR-IC	LDO, 4.95V±1%, 1A, +CE, CL	SOT-25	28cx	VR4	6g	Tor
h8	-	BD46E395G-M	Vdet-IC	3.9V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
H8	-	BL8555-18HQ	LVR-IC	LDO, 1.8V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H8	-	BL8555-18HRA	LVR-IC	LDO, 1.8V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H8	-	BL8555-18HRB	LVR-IC	LDO, 1.8V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H8	-	HD74HC1G86CM	CMOS-Log	2-input EXCLUSIVE-OR gate	CMPAK-5	28	Log5	6a	Ren
H8	-	LR8555-18HQ	LVR-IC	LDO, 1.8V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H8	-	LR8555-18HRA	LVR-IC	LDO, 1.8V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H8	-	LR8555-18HRB	LVR-IC	LDO, 1.8V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H8	-	R1111N481B	LVR-IC	LDO, Low noise, 4.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
H8	-	TC7SH86F	CMOS-Log	2-input EXCLUSIVE-OR gate	SSOP-5	28	Log5	6a	Tos
H8	-	TC7SH86FU	CMOS-Log	2-input EXCLUSIVE-OR gate	SC-70-5	28	Log5	6a	Tos
H8	ea	BL8555-18TQ	LVR-IC	LDO, 1.8V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H8	ea	BL8555-18TRA	LVR-IC	LDO, 1.8V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H8	ea	BL8555-18TRB	LVR-IC	LDO, 1.8V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H8	ea	LR8555-18TQ	LVR-IC	LDO, 1.8V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H8	ea	LR8555-18TRA	LVR-IC	LDO, 1.8V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H8	ea	LR8555-18TRB	LVR-IC	LDO, 1.8V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H8	eu	BL8555-28TQ	LVR-IC	LDO, 2.8V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H8	eu	BL8555-28TRA	LVR-IC	LDO, 2.8V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H8	eu	BL8555-28TRB	LVR-IC	LDO, 2.8V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H8	eu	LR8555-28TQ	LVR-IC	LDO, 2.8V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H8	eu	LR8555-28TRA	LVR-IC	LDO, 2.8V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H8	eu	LR8555-28TRB	LVR-IC	LDO, 2.8V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H8	fg	BL8555-38TQ	LVR-IC	LDO, 3.8V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H8	fg	BL8555-38TRA	LVR-IC	LDO, 3.8V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H8	fg	BL8555-38TRB	LVR-IC	LDO, 3.8V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H8	fg	LR8555-38TQ	LVR-IC	LDO, 3.8V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H8	fg	LR8555-38TRA	LVR-IC	LDO, 3.8V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H8	fg	LR8555-38TRB	LVR-IC	LDO, 3.8V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H8	fh	BL8555-48TQ	LVR-IC	LDO, 4.8V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H8	fh	BL8555-48TRA	LVR-IC	LDO, 4.8V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H8	fh	BL8555-48TRB	LVR-IC	LDO, 4.8V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H8	fh	LR8555-48TQ	LVR-IC	LDO, 4.8V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H8	fh	LR8555-48TRA	LVR-IC	LDO, 4.8V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H8	fh	LR8555-48TRB	LVR-IC	LDO, 4.8V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H8	fk	BL8555-38HQ	LVR-IC	LDO, 3.8V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H8	fk	BL8555-38HRA	LVR-IC	LDO, 3.8V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H8	fk	BL8555-38HRB	LVR-IC	LDO, 3.8V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H8	fk	LR8555-38HQ	LVR-IC	LDO, 3.8V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H8	fk	LR8555-38HRA	LVR-IC	LDO, 3.8V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H8	fk	LR8555-38HRB	LVR-IC	LDO, 3.8V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H8	fm	BL8555-48HQ	LVR-IC	LDO, 4.8V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H8	fm	BL8555-48HRA	LVR-IC	LDO, 4.8V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H8	fm	BL8555-48HRB	LVR-IC	LDO, 4.8V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H8	fm	LR8555-48HQ	LVR-IC	LDO, 4.8V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H8	fm	LR8555-48HRA	LVR-IC	LDO, 4.8V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H8	fm	LR8555-48HRB	LVR-IC	LDO, 4.8V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H8	fp	BL8555-28HQ	LVR-IC	LDO, 2.8V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H8	fp	BL8555-28HRA	LVR-IC	LDO, 2.8V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H8	fp	BL8555-28HRB	LVR-IC	LDO, 2.8V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H8	fp	LR8555-28HQ	LVR-IC	LDO, 2.8V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H8	fp	LR8555-28HRA	LVR-IC	LDO, 2.8V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H8	fp	LR8555-28HRB	LVR-IC	LDO, 2.8V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H80	-	SN74AUP1G80DBV	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT-23-5	28	Log21	6g	Ti
H86	-	74HC1G86GV	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT753	28	Log5	6a	Nxp
H88	-	XC6220C081MR	LVR-IC	LDO, 0.8V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H89	-	XC6220C091MR	LVR-IC	LDO, 0.9V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8A	-	XC6220C101MR	LVR-IC	LDO, 1.0V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8B	-	XC6220C111MR	LVR-IC	LDO, 1.1V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8C	-	XC6220C121MR	LVR-IC	LDO, 1.2V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8D	-	XC6220C131MR	LVR-IC	LDO, 1.3V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8E	-	XC6220C141MR	LVR-IC	LDO, 1.4V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8F	-	XC6220C151MR	LVR-IC	LDO, 1.5V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8H	-	XC6220C161MR	LVR-IC	LDO, 1.6V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8K	-	XC6220C171MR	LVR-IC	LDO, 1.7V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8L	-	XC6220C181MR	LVR-IC	LDO, 1.8V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8M	-	XC6220C191MR	LVR-IC	LDO, 1.9V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8N	-	XC6220C201MR	LVR-IC	LDO, 2.0V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8P	-	XC6220C211MR	LVR-IC	LDO, 2.1V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8R	-	XC6220C221MR	LVR-IC	LDO, 2.2V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8S	-	XC6220C231MR	LVR-IC	LDO, 2.3V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8T	-	XC6220C241MR	LVR-IC	LDO, 2.4V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8U	-	XC6220C251MR	LVR-IC	LDO, 2.5V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8V	-	XC6220C261MR	LVR-IC	LDO, 2.6V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8X	-	XC6220C271MR	LVR-IC	LDO, 2.7V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8Y	-	XC6220C281MR	LVR-IC	LDO, 2.8V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H8Z	-	XC6220C291MR	LVR-IC	LDO, 2.9V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
h9	-	BD46E405G-M	Vdet-IC	4.0V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
H9	-	BL8555-19HQ	LVR-IC	LDO, 1.9V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H9	-	BL8555-19HRA	LVR-IC	LDO, 1.9V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H9	-	BL8555-19HRB	LVR-IC	LDO, 1.9V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H9	-	HD74HC1G66CM	CMOS-Log	Single-pole single-throw analog switch	CMPAK-5	28	Log16	6a	Ren
H9	-	HD74UH4066EL	CMOS-Log	Single-pole single-throw analog switch	MPAK-5	28	Log16	6g	Ren
H9	-	LR8555-19HQ	LVR-IC	LDO, 1.9V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H9	-	LR8555-19HRA	LVR-IC	LDO, 1.9V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H9	-	LR8555-19HRB	LVR-IC	LDO, 1.9V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H9	-	R1111N491B	LVR-IC	LDO, Low noise, 4.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
H9	-	SN74AUP1G34DCK	CMOS-Log	Noninverting buffer	SC-70-5	28	Log10	6g	Ti
H9	-	SN74AUP1G34DRL	CMOS-Log	Noninverting buffer	SOT-553	30	Log10	6g	Ti
H9	ea	BL8555-19TQ	LVR-IC	LDO, 1.9V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H9	ea	BL8555-19TRA	LVR-IC	LDO, 1.9V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H9	ea	BL8555-19TRB	LVR-IC	LDO, 1.9V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H9	ea	LR8555-19TQ	LVR-IC	LDO, 1.9V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H9	ea	LR8555-19TRA	LVR-IC	LDO, 1.9V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H9	ea	LR8555-19TRB	LVR-IC	LDO, 1.9V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H9	eu	BL8555-29TQ	LVR-IC	LDO, 2.9V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H9	eu	BL8555-29TRA	LVR-IC	LDO, 2.9V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H9	eu	BL8555-29TRB	LVR-IC	LDO, 2.9V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H9	eu	LR8555-29TQ	LVR-IC	LDO, 2.9V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H9	eu	LR8555-29TRA	LVR-IC	LDO, 2.9V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H9	eu	LR8555-29TRB	LVR-IC	LDO, 2.9V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H9	fg	BL8555-39TQ	LVR-IC	LDO, 3.9V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H9	fg	BL8555-39TRA	LVR-IC	LDO, 3.9V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H9	fg	BL8555-39TRB	LVR-IC	LDO, 3.9V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H9	fg	LR8555-39TQ	LVR-IC	LDO, 3.9V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H9	fg	LR8555-39TRA	LVR-IC	LDO, 3.9V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H9	fg	LR8555-39TRB	LVR-IC	LDO, 3.9V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H9	fh	BL8555-49TQ	LVR-IC	LDO, 4.9V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Shb
H9	fh	BL8555-49TRA	LVR-IC	LDO, 4.9V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Shb
H9	fh	BL8555-49TRB	LVR-IC	LDO, 4.9V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Shb
H9	fh	LR8555-49TQ	LVR-IC	LDO, 4.9V±2%, 400mA	SC-70-5	28ym	VR1	6kd	Lrc
H9	fh	LR8555-49TRA	LVR-IC	LDO, 4.9V±2%, 400mA	SOT-23-5	28ym	VR1	6kd	Lrc
H9	fh	LR8555-49TRB	LVR-IC	LDO, 4.9V±2%, 400mA	SOT-23-5	28c5	VR1	6kc	Lrc
H9	fk	BL8555-39HQ	LVR-IC	LDO, 3.9V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H9	fk	BL8555-39HRA	LVR-IC	LDO, 3.9V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H9	fk	BL8555-39HRB	LVR-IC	LDO, 3.9V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H9	fk	LR8555-39HQ	LVR-IC	LDO, 3.9V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H9	fk	LR8555-39HRA	LVR-IC	LDO, 3.9V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H9	fk	LR8555-39HRB	LVR-IC	LDO, 3.9V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H9	fm	BL8555-49HQ	LVR-IC	LDO, 4.9V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H9	fm	BL8555-49HRA	LVR-IC	LDO, 4.9V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H9	fm	BL8555-49HRB	LVR-IC	LDO, 4.9V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H9	fm	LR8555-49HQ	LVR-IC	LDO, 4.9V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H9	fm	LR8555-49HRA	LVR-IC	LDO, 4.9V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H9	fm	LR8555-49HRB	LVR-IC	LDO, 4.9V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H9	fp	BL8555-29HQ	LVR-IC	LDO, 2.9V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
H9	fp	BL8555-29HRA	LVR-IC	LDO, 2.9V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
H9	fp	BL8555-29HRB	LVR-IC	LDO, 2.9V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
H9	fp	LR8555-29HQ	LVR-IC	LDO, 2.9V±2%, 400mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
H9	fp	LR8555-29HRA	LVR-IC	LDO, 2.9V±2%, 400mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
H9	fp	LR8555-29HRB	LVR-IC	LDO, 2.9V±2%, 400mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
H98	-	XC6220C08BMR	LVR-IC	LDO, 0.85V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H99	-	XC6220C09BMR	LVR-IC	LDO, 0.95V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9A	-	XC6220C10BMR	LVR-IC	LDO, 1.05V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9B	-	XC6220C11BMR	LVR-IC	LDO, 1.15V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9C	-	XC6220C12BMR	LVR-IC	LDO, 1.25V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9D	-	XC6220C13BMR	LVR-IC	LDO, 1.35V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9E	-	XC6220C14BMR	LVR-IC	LDO, 1.45V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9F	-	XC6220C15BMR	LVR-IC	LDO, 1.55V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9H	-	XC6220C16BMR	LVR-IC	LDO, 1.65V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9K	-	XC6220C17BMR	LVR-IC	LDO, 1.75V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9L	-	XC6220C18BMR	LVR-IC	LDO, 1.85V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9M	-	XC6220C19BMR	LVR-IC	LDO, 1.95V±20mV, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9N	-	XC6220C20BMR	LVR-IC	LDO, 2.05V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9P	-	XC6220C21BMR	LVR-IC	LDO, 2.15V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9R	-	XC6220C22BMR	LVR-IC	LDO, 2.25V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9S	-	XC6220C23BMR	LVR-IC	LDO, 2.35V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9T	-	XC6220C24BMR	LVR-IC	LDO, 2.45V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9U	-	XC6220C25BMR	LVR-IC	LDO, 2.55V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9V	-	XC6220C26BMR	LVR-IC	LDO, 2.65V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9X	-	XC6220C27BMR	LVR-IC	LDO, 2.75V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9Y	-	XC6220C28BMR	LVR-IC	LDO, 2.85V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
H9Z	-	XC6220C29BMR	LVR-IC	LDO, 2.95V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HA	-	74HC1G00GW	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6a	Nxp
HA	-	BU4809FWE	Vdet-IC	0.9V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HA	-	BU4809G	Vdet-IC	0.9V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HA	-	HD74HC1G14CM	CMOS-Log	Inverting Schmitt-trigger	CMPAK-5	28	Log7	6a	Ren
HA	-	KRA551F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=4.7k/4.7k	TFSV	30/TD9	TD9	6a	Kec
HA	-	MC74HC1G14DF	CMOS-Log	Inverting Schmitt-trigger	SC-70-5	28	Log7	6b	Ons
HA	-	MC74HC1G14DT	CMOS-Log	Inverting Schmitt-trigger	SOT-23-5	28	Log7	6b	Ons
HA	-	SN74AUP1G00DCK	CMOS-Log	2-input NAND gate	SC-70-5	28	Log1	6g	Ti
HA	-	SN74AUP1G00DRL	CMOS-Log	2-input NAND gate	SOT-553	30	Log1	6g	Ti
HA	-	TC6501P045VCT	Tdet-IC	45°C±0.5°C, -Tover ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
HA	-	TC7SH14F	CMOS-Log	Inverting Schmitt-trigger	SSOP-5	28	Log7	6a	Tos
HA	-	TC7SH14FU	CMOS-Log	Inverting Schmitt-trigger	SC-70-5	28	Log7	6a	Tos
HA0	-	XC6220C301MR	LVR-IC	LDO, 3.0V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HA0	ej	XC6123D330MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HA0	fe	XC6123C730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HA1	-	XC6220C311MR	LVR-IC	LDO, 3.1V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HA1	ej	XC6123D331MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HA1	fe	XC6123C731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HA2	-	XC6220C321MR	LVR-IC	LDO, 3.2V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HA2	ej	XC6123D332MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HA2	fe	XC6123C732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HA3	-	XC6220C331MR	LVR-IC	LDO, 3.3V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HA3	ej	XC6123D333MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HA3	fe	XC6123C733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HA4	-	XC6220C341MR	LVR-IC	LDO, 3.4V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HA4	ej	XC6123D334MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HA4	fe	XC6123C734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HA5	-	XC6220C351MR	LVR-IC	LDO, 3.5V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HA5	ej	XC6123D335MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HA5	fe	XC6123C735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HA6	-	XC6220C361MR	LVR-IC	LDO, 3.6V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HA6	ej	XC6123D336MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HA6	fe	XC6123C736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HA7	-	SN74AUP1G57DBV	CMOS-Log	Configurable multiple-function gate	SOT-23-5	28	Log36	6g	Ti
HA7	-	XC6220C371MR	LVR-IC	LDO, 3.7V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HA7	ej	XC6123D337MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HA7	fe	XC6123C737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HA8	-	XC6220C381MR	LVR-IC	LDO, 3.8V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HA8	ej	XC6123D338MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HA8	fe	XC6123C738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HA9	-	XC6220C391MR	LVR-IC	LDO, 3.9V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HA9	ej	XC6123D339MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HA9	fe	XC6123C739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAA	-	RP170N571B	LVR-IC	LDO, 5.7V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
HAA	-	XC6220C401MR	LVR-IC	LDO, 4.0V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HAA	ej	XC6123D340MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAA	fe	XC6123C740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAB	-	RP170N581B	LVR-IC	LDO, 5.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
HAB	-	XC6220C411MR	LVR-IC	LDO, 4.1V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HAB	ej	XC6123D341MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAB	fe	XC6123C741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAC	-	RP170N591B	LVR-IC	LDO, 5.9V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
HAC	-	XC6220C421MR	LVR-IC	LDO, 4.2V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HAC	ej	XC6123D342MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAC	fe	XC6123C742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAD	-	RP170N601B	LVR-IC	LDO, 6.0V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
HAD	-	XC6220C431MR	LVR-IC	LDO, 4.3V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HAD	ej	XC6123D343MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAD	fe	XC6123C743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAE	-	XC6220C441MR	LVR-IC	LDO, 4.4V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HAE	ej	XC6123D344MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAE	fe	XC6123C744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAF	-	XC6220C451MR	LVR-IC	LDO, 4.5V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HAF	ej	XC6123D345MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAF	fe	XC6123C745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAH	-	XC6220C461MR	LVR-IC	LDO, 4.6V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HAH	ec	XC6123D316MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAH	ej	XC6123D346MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAH	em	XC6123C716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAH	fe	XC6123C746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAK	-	XC6220C471MR	LVR-IC	LDO, 4.7V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HAK	ec	XC6123D317MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAK	ej	XC6123D347MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAK	em	XC6123C717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAK	fe	XC6123C747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAL	-	XC6220C481MR	LVR-IC	LDO, 4.8V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HAL	ec	XC6123D318MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAL	ej	XC6123D348MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAL	em	XC6123C718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAL	fe	XC6123C748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAM	-	XC6220C491MR	LVR-IC	LDO, 4.9V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HAM	ec	XC6123D319MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAM	ej	XC6123D349MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAM	em	XC6123C719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAM	fe	XC6123C749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAN	-	XC6220C501MR	LVR-IC	LDO, 5.0V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HAN	ec	XC6123D320MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAN	ej	XC6123D350MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAN	em	XC6123C720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HAN	fe	XC6123C750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAP	ec	XC6123D321MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAP	em	XC6123C721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAR	ec	XC6123D322MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAR	em	XC6123C722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAS	ec	XC6123D323MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAS	em	XC6123C723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAT	ec	XC6123D324MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAT	em	XC6123C724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAU	ec	XC6123D325MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAU	em	XC6123C725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAV	ec	XC6123D326MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAV	em	XC6123C726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAX	ec	XC6123D327MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAX	em	XC6123C727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAY	ec	XC6123D328MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAY	em	XC6123C728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HAZ	ec	XC6123D329MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HAZ	em	XC6123C729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HB	-	74HC1G02GW	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6a	Nxp
HB	-	BU4810FWE	Vdet-IC	1.0V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HB	-	BU4810G	Vdet-IC	1.0V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HB	-	KRA552F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=10k/10k	TFSV	30/TD9	TD9	6a	Kec
HB	-	SN74AUP1G02DCK	CMOS-Log	2-input NOR gate	SC-70-5	28	Log2	6g	Ti
HB	-	SN74AUP1G02DRL	CMOS-Log	2-input NOR gate	SOT-553	30	Log2	6g	Ti
HB	-	TC7SH125F	CMOS-Log	Bus buffer gate with 3-state output	SSOP-5	28	Log14	6a	Tos
HB	-	TC7SH125FE	CMOS-Log	Bus buffer gate with 3-state output	SOT-553	30	Log14	6a	Tos
HB	-	TC7SH125FU	CMOS-Log	Bus buffer gate with 3-state output	SC-70-5	28	Log14	6a	Tos
HB0	-	XC6220C30BMR	LVR-IC	LDO, 3.05V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HB0	ej	XC6123D530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HB0	fe	XC6123C630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HB1	-	XC6220C31BMR	LVR-IC	LDO, 3.15V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HB1	ej	XC6123D531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HB1	fe	XC6123C631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HB2	-	XC6220C32BMR	LVR-IC	LDO, 3.25V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HB2	ej	XC6123D532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HB2	fe	XC6123C632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HB3	-	XC6220C33BMR	LVR-IC	LDO, 3.35V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HB3	ej	XC6123D533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HB3	fe	XC6123C633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HB4	-	XC6220C34BMR	LVR-IC	LDO, 3.45V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HB4	ej	XC6123D534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HB4	fe	XC6123C634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HB5	-	XC6220C35BMR	LVR-IC	LDO, 3.55V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HB5	ej	XC6123D535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HB5	fe	XC6123C635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HB6	-	XC6220C36BMR	LVR-IC	LDO, 3.65V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HB6	ej	XC6123D536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HB6	fe	XC6123C636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HB7	-	XC6220C37BMR	LVR-IC	LDO, 3.75V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HB7	ej	XC6123D537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HB7	fe	XC6123C637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HB8	-	XC6220C38BMR	LVR-IC	LDO, 3.85V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HB8	ej	XC6123D538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HB8	fe	XC6123C638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HB9	-	XC6220C39BMR	LVR-IC	LDO, 3.95V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HB9	ej	XC6123D539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HB9	fe	XC6123C639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBA	-	RP170N571D	LVR-IC	LDO, 5.7V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
HBA	-	XC6220C40BMR	LVR-IC	LDO, 4.05V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HBA	ej	XC6123D540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBA	fe	XC6123C640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBB	-	RP170N581D	LVR-IC	LDO, 5.8V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
HBB	-	XC6220C41BMR	LVR-IC	LDO, 4.15V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HBB	ej	XC6123D541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBB	fe	XC6123C641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBC	-	RP170N591D	LVR-IC	LDO, 5.9V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
HBC	-	XC6220C42BMR	LVR-IC	LDO, 4.25V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HBC	ej	XC6123D542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBC	fe	XC6123C642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HBD	-	RP170N601D	LVR-IC	LDO, 6.0V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
HBD	-	XC6220C43BMR	LVR-IC	LDO, 4.35V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HBD	ej	XC6123D543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBD	fe	XC6123C643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBE	-	XC6220C44BMR	LVR-IC	LDO, 4.45V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HBE	ej	XC6123D544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBE	fe	XC6123C644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBF	-	XC6220C45BMR	LVR-IC	LDO, 4.55V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HBF	ej	XC6123D545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBF	fe	XC6123C645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBH	-	XC6220C46BMR	LVR-IC	LDO, 4.65V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HBH	ec	XC6123D516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBH	ej	XC6123D546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBH	em	XC6123C616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBH	fe	XC6123C646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBK	-	XC6220C47BMR	LVR-IC	LDO, 4.75V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HBK	ec	XC6123D517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBK	ej	XC6123D547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBK	em	XC6123C617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBK	fe	XC6123C647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBL	-	XC6220C48BMR	LVR-IC	LDO, 4.85V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HBL	ec	XC6123D518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBL	ej	XC6123D548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBL	em	XC6123C618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBL	fe	XC6123C648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBM	-	XC6220C49BMR	LVR-IC	LDO, 4.95V±1%, 1A, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
HBM	ec	XC6123D519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBM	ej	XC6123D549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBM	em	XC6123C619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBM	fe	XC6123C649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBN	ec	XC6123D520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBN	ej	XC6123D550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBN	em	XC6123C620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBN	fe	XC6123C650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBP	ec	XC6123D521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBP	em	XC6123C621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBR	ec	XC6123D522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBR	em	XC6123C622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBS	ec	XC6123D523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBS	em	XC6123C623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBT	ec	XC6123D524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBT	em	XC6123C624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBU	ec	XC6123D525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBU	em	XC6123C625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBV	ec	XC6123D526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBV	em	XC6123C626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBX	ec	XC6123D527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBX	em	XC6123C627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBY	ec	XC6123D528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBY	em	XC6123C628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HBZ	ec	XC6123D529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HBZ	em	XC6123C629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HC	-	74HC1G04GW	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Nxp
HC	-	BU4811FWE	Vdet-IC	1.1V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HC	-	BU4811G	Vdet-IC	1.1V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HC	-	KRA553F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=22k/22k	TFSV	30/TD9	TD9	6a	Kec
HC	-	SN74AUP1G04DCK	CMOS-Log	Inverter	SC-70-5	28	Log6	6g	Ti
HC	-	SN74AUP1G04DRL	CMOS-Log	Inverter	SOT-553	30	Log6	6g	Ti
HC	-	TC6501P065VCT	Tdet-IC	65°C±0.5°C, -Tover ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
HC0	ej	XC6123D630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC0	fe	XC6123D430MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC1	ej	XC6123D631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC1	fe	XC6123D431MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC2	ej	XC6123D632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC2	fe	XC6123D432MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC3	ej	XC6123D633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC3	fe	XC6123D433MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC4	ej	XC6123D634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC4	fe	XC6123D434MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC5	ej	XC6123D635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HC5	fe	XC6123D435MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC6	ej	XC6123D636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC6	fe	XC6123D436MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC7	ej	XC6123D637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC7	fe	XC6123D437MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC8	-	XC6220D081MR	LVR-IC	LDO, 0.8V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HC8	ej	XC6123D638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC8	fe	XC6123D438MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC9	-	XC6220D091MR	LVR-IC	LDO, 0.9V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HC9	ej	XC6123D639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HC9	fe	XC6123D439MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCA	-	XC6220D101MR	LVR-IC	LDO, 1.0V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCA	ej	XC6123D640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCA	fe	XC6123D440MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCB	-	XC6220D111MR	LVR-IC	LDO, 1.1V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCB	ej	XC6123D641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCB	fe	XC6123D441MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCC	-	XC6220D121MR	LVR-IC	LDO, 1.2V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCC	ej	XC6123D642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCC	fe	XC6123D442MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCD	-	XC6220D131MR	LVR-IC	LDO, 1.3V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCD	ej	XC6123D643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCD	fe	XC6123D443MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCE	-	XC6220D141MR	LVR-IC	LDO, 1.4V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCE	ej	XC6123D644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCE	fe	XC6123D444MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCF	-	XC6220D151MR	LVR-IC	LDO, 1.5V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCF	ej	XC6123D645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCF	fe	XC6123D445MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCH	-	XC6220D161MR	LVR-IC	LDO, 1.6V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCH	ec	XC6123D616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCH	ej	XC6123D646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCH	em	XC6123D416MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCH	fe	XC6123D446MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCK	-	XC6220D171MR	LVR-IC	LDO, 1.7V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCK	ec	XC6123D617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCK	ej	XC6123D647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCK	em	XC6123D417MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCK	fe	XC6123D447MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCL	-	XC6220D181MR	LVR-IC	LDO, 1.8V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCL	ec	XC6123D618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCL	ej	XC6123D648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCL	em	XC6123D418MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCL	fe	XC6123D448MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCM	-	XC6220D191MR	LVR-IC	LDO, 1.9V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCM	ec	XC6123D619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCM	ej	XC6123D649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCM	em	XC6123D419MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCM	fe	XC6123D449MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCN	-	XC6220D201MR	LVR-IC	LDO, 2.0V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCN	ec	XC6123D620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCN	ej	XC6123D650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCN	em	XC6123D420MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCN	fe	XC6123D450MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCP	-	XC6220D211MR	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCP	ec	XC6123D621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCP	em	XC6123D421MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCR	-	XC6220D221MR	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCR	ec	XC6123D622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCR	em	XC6123D422MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCS	-	XC6220D231MR	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCS	ec	XC6123D623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCS	em	XC6123D423MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCT	-	XC6220D241MR	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCT	ec	XC6123D624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCT	em	XC6123D424MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCU	-	XC6220D251MR	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCU	ec	XC6123D625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCU	em	XC6123D425MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCV	-	XC6220D261MR	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HCV	ec	XC6123D626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCV	em	XC6123D426MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCX	-	XC6220D271MR	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCX	ec	XC6123D627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCX	em	XC6123D427MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCY	-	XC6220D281MR	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCY	ec	XC6123D628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCY	em	XC6123D428MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCZ	-	XC6220D291MR	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HCZ	ec	XC6123D629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HCZ	em	XC6123D429MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HD	-	74HC1GU04GW	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Nxp
HD	-	BU4812FWE	Vdet-IC	1.2V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HD	-	BU4812G	Vdet-IC	1.2V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HD	-	KRA554F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=47k/47k	TFSV	30/TD9	TD9	6a	Kec
HD	-	TC6501P075VCT	Tdet-IC	75°C±0.5°C, -Tover ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
HD0	ej	XC6123E430MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HD0	fe	XC6123D730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HD1	ej	XC6123E431MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HD1	fe	XC6123D731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HD2	ej	XC6123E432MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HD2	fe	XC6123D732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HD3	ej	XC6123E433MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HD3	fe	XC6123D733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HD4	ej	XC6123E434MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HD4	fe	XC6123D734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HD5	ej	XC6123E435MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HD5	fe	XC6123D735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HD6	ej	XC6123E436MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HD6	fe	XC6123D736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HD7	ej	XC6123E437MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HD7	fe	XC6123D737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HD8	-	XC6220D08BMR	LVR-IC	LDO, 0.85V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HD8	ej	XC6123E438MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HD8	fe	XC6123D738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HD9	-	XC6220D09BMR	LVR-IC	LDO, 0.95V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HD9	ej	XC6123E439MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HD9	fe	XC6123D739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDA	-	XC6220D10BMR	LVR-IC	LDO, 1.05V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDA	ej	XC6123E440MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDA	fe	XC6123D740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDB	-	XC6220D11BMR	LVR-IC	LDO, 1.15V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDB	ej	XC6123E441MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDB	fe	XC6123D741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDC	-	XC6220D12BMR	LVR-IC	LDO, 1.25V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDC	ej	XC6123E442MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDC	fe	XC6123D742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDD	-	XC6220D13BMR	LVR-IC	LDO, 1.35V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDD	ej	XC6123E443MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDD	fe	XC6123D743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDE	-	XC6220D14BMR	LVR-IC	LDO, 1.45V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDE	ej	XC6123E444MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDE	fe	XC6123D744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDF	-	XC6220D15BMR	LVR-IC	LDO, 1.55V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDF	ej	XC6123E445MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDF	fe	XC6123D745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDH	-	XC6220D16BMR	LVR-IC	LDO, 1.65V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDH	ec	XC6123E416MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDH	ej	XC6123E446MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDH	em	XC6123D716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDH	fe	XC6123D746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDK	-	XC6220D17BMR	LVR-IC	LDO, 1.75V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDK	ec	XC6123E417MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDK	ej	XC6123E447MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDK	em	XC6123D717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDK	fe	XC6123D747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDL	-	XC6220D18BMR	LVR-IC	LDO, 1.85V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDL	ec	XC6123E418MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDL	ej	XC6123E448MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDL	em	XC6123D718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HDL	fe	XC6123D748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDM	-	XC6220D19BMR	LVR-IC	LDO, 1.95V±20mV, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDM	ec	XC6123E419MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDM	ej	XC6123E449MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDM	em	XC6123D719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDM	fe	XC6123D749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDN	-	XC6220D20BMR	LVR-IC	LDO, 2.05V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDN	ec	XC6123E420MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDN	ej	XC6123E450MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDN	em	XC6123D720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDN	fe	XC6123D750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDP	-	XC6220D21BMR	LVR-IC	LDO, 2.15V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDP	ec	XC6123E421MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDP	em	XC6123D721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDR	-	XC6220D22BMR	LVR-IC	LDO, 2.25V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDR	ec	XC6123E422MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDR	em	XC6123D722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDS	-	XC6220D23BMR	LVR-IC	LDO, 2.35V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDS	ec	XC6123E423MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDS	em	XC6123D723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDT	-	XC6220D24BMR	LVR-IC	LDO, 2.45V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDT	ec	XC6123E424MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDT	em	XC6123D724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDU	-	XC6220D25BMR	LVR-IC	LDO, 2.55V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDU	ec	XC6123E425MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDU	em	XC6123D725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDV	-	XC6220D26BMR	LVR-IC	LDO, 2.65V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDV	ec	XC6123E426MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDV	em	XC6123D726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDX	-	XC6220D27BMR	LVR-IC	LDO, 2.75V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDX	ec	XC6123E427MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDX	em	XC6123D727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDY	-	XC6220D28BMR	LVR-IC	LDO, 2.85V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDY	ec	XC6123E428MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDY	em	XC6123D728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HDZ	-	XC6220D29BMR	LVR-IC	LDO, 2.95V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HDZ	ec	XC6123E429MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HDZ	em	XC6123D729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
HE	-	74HC1G08GW	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Nxp
HE	-	AAT3515IGV-2.63-C	Vdet-IC	2.63V±1.5%, -MR, ±Reset PPO, 140ms	SOT-23-5	28xf	VD21	6k	Ant
HE	-	BU4813FWE	Vdet-IC	1.3V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HE	-	BU4813G	Vdet-IC	1.3V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HE	-	SN74AUP1G08DCK	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6g	Ti
HE	-	SN74AUP1G08DRL	CMOS-Log	2-input AND gate	SOT-553	30	Log3	6g	Ti
HE0	-	XC6220D301MR	LVR-IC	LDO, 3.0V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HE0	ej	XC6123E530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HE1	-	XC6220D311MR	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HE1	ej	XC6123E531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HE2	-	XC6220D321MR	LVR-IC	LDO, 3.2V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HE2	ej	XC6123E532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HE3	-	XC6220D331MR	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HE3	ej	XC6123E533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HE4	-	XC6220D341MR	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HE4	ej	XC6123E534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HE5	-	XC6220D351MR	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HE5	ej	XC6123E535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HE6	-	XC6220D361MR	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HE6	ej	XC6123E536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HE7	-	XC6220D371MR	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HE7	ej	XC6123E537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HE8	-	XC6220D381MR	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HE8	ej	XC6123E538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HE9	-	XC6220D391MR	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HE9	ej	XC6123E539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEA	-	XC6220D401MR	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HEA	ej	XC6123E540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEB	-	XC6220D411MR	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HEB	ej	XC6123E541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEC	-	XC6220D421MR	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HEC	ej	XC6123E542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HED	-	XC6220D431MR	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HED	ej	XC6123E543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEE	-	XC6220D441MR	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HEE	ej	XC6123E544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEF	-	XC6220D451MR	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HEF	ej	XC6123E545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEH	-	XC6220D461MR	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HEH	ec	XC6123E516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEH	ej	XC6123E546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEK	-	XC6220D471MR	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HEK	ec	XC6123E517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEK	ej	XC6123E547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEL	-	XC6220D481MR	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HEL	ec	XC6123E518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEL	ej	XC6123E548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEM	-	XC6220D491MR	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HEM	ec	XC6123E519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEM	ej	XC6123E549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEN	-	XC6220D501MR	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HEN	ec	XC6123E520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEN	ej	XC6123E550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEP	ec	XC6123E521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HER	ec	XC6123E522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HES	ec	XC6123E523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HET	ec	XC6123E524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEU	ec	XC6123E525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEV	ec	XC6123E526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEX	ec	XC6123E527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEY	ec	XC6123E528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HEZ	ec	XC6123E529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HF	-	74HC1G14GW	CMOS-Log	Inverting Schmitt-trigger	SOT-353	28	Log7	6a	Nxp
HF	-	AAT3513IGV-2.63-C-C	Vdet-IC	2.63V±1.5%, ±Reset PPO	SOT-23-5	28xq	-	6k	Ant
HF	-	BU4814FWE	Vdet-IC	1.4V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HF	-	BU4814G	Vdet-IC	1.4V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HF	-	SN74AUP1G14DCK	CMOS-Log	Inverting Schmitt-trigger	SC-70-5	28	Log7	6g	Ti
HF	-	SN74AUP1G14DRL	CMOS-Log	Inverting Schmitt-trigger	SOT-553	30	Log7	6g	Ti
HF	-	TC6501P095VCT	Tdet-IC	95°C±0.5°C, -Tover ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
HF0	-	XC6220D30BMR	LVR-IC	LDO, 3.05V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HF0	ej	XC6123E630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HF1	-	XC6220D31BMR	LVR-IC	LDO, 3.15V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HF1	ej	XC6123E631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HF2	-	XC6220D32BMR	LVR-IC	LDO, 3.25V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HF2	ej	XC6123E632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HF3	-	XC6220D33BMR	LVR-IC	LDO, 3.35V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HF3	ej	XC6123E633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HF4	-	XC6220D34BMR	LVR-IC	LDO, 3.45V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HF4	ej	XC6123E634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HF5	-	XC6220D35BMR	LVR-IC	LDO, 3.55V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HF5	ej	XC6123E635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HF6	-	XC6220D36BMR	LVR-IC	LDO, 3.65V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HF6	ej	XC6123E636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HF7	-	XC6220D37BMR	LVR-IC	LDO, 3.75V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HF7	ej	XC6123E637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HF8	-	XC6220D38BMR	LVR-IC	LDO, 3.85V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HF8	ej	XC6123E638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HF9	-	XC6220D39BMR	LVR-IC	LDO, 3.95V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HF9	ej	XC6123E639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFA	-	XC6220D40BMR	LVR-IC	LDO, 4.05V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HFA	ej	XC6123E640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFB	-	XC6220D41BMR	LVR-IC	LDO, 4.15V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HFB	ej	XC6123E641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFC	-	XC6220D42BMR	LVR-IC	LDO, 4.25V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HFC	ej	XC6123E642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFD	-	XC6220D43BMR	LVR-IC	LDO, 4.35V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HFD	ej	XC6123E643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFE	-	XC6220D44BMR	LVR-IC	LDO, 4.45V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HFE	ej	XC6123E644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFF	-	XC6220D45BMR	LVR-IC	LDO, 4.55V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HFF	ej	XC6123E645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFH	-	XC6220D46BMR	LVR-IC	LDO, 4.65V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HFH	ec	XC6123E616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFH	ej	XC6123E646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFK	-	XC6220D47BMR	LVR-IC	LDO, 4.75V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HFK	ec	XC6123E617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFK	ej	XC6123E647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFL	-	XC6220D48BMR	LVR-IC	LDO, 4.85V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HFL	ec	XC6123E618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFL	ej	XC6123E648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFM	-	XC6220D49BMR	LVR-IC	LDO, 4.95V±1%, 1A, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
HFM	ec	XC6123E619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFM	ej	XC6123E649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFN	ec	XC6123E620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFN	ej	XC6123E650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFP	ec	XC6123E621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFR	ec	XC6123E622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFS	ec	XC6123E623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFT	ec	XC6123E624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFU	ec	XC6123E625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFV	ec	XC6123E626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFX	ec	XC6123E627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFY	ec	XC6123E628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HFZ	ec	XC6123E629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HG	-	74HC1G32GW	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6a	Nxp
HG	-	AAT3510IGV-3.08-C-C	Vdet-IC	3.08V±1.5%, -MR, -Reset PPO	SOT-23-5	28cp	VD17	6k	Ant
HG	-	BU4815FWE	Vdet-IC	1.5V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HG	-	BU4815G	Vdet-IC	1.5V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HG	-	KRA557F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=10k/47k	TFSV	30/TD9	TD9	6a	Kec
HG	-	SN74AUP1G32DCK	CMOS-Log	2-input OR gate	SC-70-5	28	Log4	6g	Ti
HG	-	SN74AUP1G32DRL	CMOS-Log	2-input OR gate	SOT-553	30	Log4	6g	Ti
HG	-	TC6501P105VCT	Tdet-IC	105°C±0.5°C, -Tover ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
HH	-	74HC1G86GW	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353	28	Log5	6a	Nxp
HH	-	AAT3510IGV-4.38-C-C	Vdet-IC	4.38V±1.5%, -MR, -Reset PPO	SOT-23-5	28cp	VD17	6k	Ant
HH	-	BU4816FWE	Vdet-IC	1.6V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HH	-	BU4816G	Vdet-IC	1.6V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HH	-	KRA558F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=22k/47k	TFSV	30/TD9	TD9	6a	Kec
HH	-	SN74AUP1G57DCK	CMOS-Log	Configurable multiple-function gate	SC-70-5	28	Log36	6g	Ti
HH	-	SN74AUP1G57DRL	CMOS-Log	Configurable multiple-function gate	SOT-553	30	Log36	6g	Ti
HH	-	TC6501P115VCT	Tdet-IC	115°C±0.5°C, -Tover ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
HH0	ej	XC6123E730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HH1	ej	XC6123E731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HH2	ej	XC6123E732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HH3	ej	XC6123E733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HH4	ej	XC6123E734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HH5	ej	XC6123E735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HH6	ej	XC6123E736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HH7	ej	XC6123E737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HH8	ej	XC6123E738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HH9	ej	XC6123E739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHA	ej	XC6123E740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHB	ej	XC6123E741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHC	ej	XC6123E742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHD	ej	XC6123E743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHE	ej	XC6123E744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHF	ej	XC6123E745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHH	ec	XC6123E716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHH	ej	XC6123E746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHK	ec	XC6123E717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHK	ej	XC6123E747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHL	ec	XC6123E718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHL	ej	XC6123E748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHM	ec	XC6123E719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHM	ej	XC6123E749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHN	ec	XC6123E720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHN	ej	XC6123E750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHP	ec	XC6123E721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHR	ec	XC6123E722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHS	ec	XC6123E723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHT	ec	XC6123E724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHU	ec	XC6123E725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHV	ec	XC6123E726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HHX	ec	XC6123E727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHY	ec	XC6123E728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HHZ	ec	XC6123E729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
HI	-	AAT3515IGV-2.93-B	Vdet-IC	2.93V±1.5%, -MR, ±Reset PPO, 20ms	SOT-23-5	28xf	VD21	6k	Ant
HJ	-	BU4817FWE	Vdet-IC	1.7V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HJ	-	BU4817G	Vdet-IC	1.7V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HJ	-	KRA559F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=47k/22k	TFSV	30/TD9	TD9	6a	Kec
HJ	-	SN74AUP1G58DCK	CMOS-Log	Configurable multiple-function gate	SC-70-5	28	Log37	6g	Ti
HJ	-	SN74AUP1G58DRL	CMOS-Log	Configurable multiple-function gate	SOT-553	30	Log37	6g	Ti
HJ	-	TC6501P125VCT	Tdet-IC	125°C±0.5°C, -Tover ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
HK	-	BU4818FWE	Vdet-IC	1.8V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HK	-	BU4818G	Vdet-IC	1.8V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HK	-	KRA560F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=4.7k	TFSV	30/TD9	TD9	6a	Kec
HK	-	SN74AUP1G420DCK	CMOS-Log	Bus buffer inverted with 3–state output	SC-70-5	28	Log22	6g	Ti
HK0	ej	XC6123F530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HK1	ej	XC6123F531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HK2	ej	XC6123F532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HK3	ej	XC6123F533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HK4	ej	XC6123F534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HK5	ej	XC6123F535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HK6	ej	XC6123F536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HK7	ej	XC6123F537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HK8	ej	XC6123F538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HK9	ej	XC6123F539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKA	ej	XC6123F540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKB	ej	XC6123F541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKC	ej	XC6123F542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKD	ej	XC6123F543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKE	ej	XC6123F544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKF	ej	XC6123F545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKH	ec	XC6123F516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKH	ej	XC6123F546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKK	ec	XC6123F517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKK	ej	XC6123F547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKL	ec	XC6123F518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKL	ej	XC6123F548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKM	ec	XC6123F519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKM	ej	XC6123F549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKN	ec	XC6123F520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKN	ej	XC6123F550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKP	ec	XC6123F521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKR	ec	XC6123F522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKS	ec	XC6123F523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKT	ec	XC6123F524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKU	ec	XC6123F525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKV	ec	XC6123F526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKX	ec	XC6123F527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKY	ec	XC6123F528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HKZ	ec	XC6123F529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HL	-	74HC1G66GW	CMOS-Log	Single-pole single-throw analog switch	SOT-353	28	Log16	6a	Nxp
HL	-	BU4819FWE	Vdet-IC	1.9V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HL	-	BU4819G	Vdet-IC	1.9V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HL	-	KRA561F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=10k	TFSV	30/TD9	TD9	6a	Kec
HL	-	R1112N401B	LVR-IC	LDO, Low noise, 4.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
HL0	ej	XC6123F630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HL1	ej	XC6123F631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HL2	ej	XC6123F632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HL3	ej	XC6123F633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HL4	ej	XC6123F634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HL5	ej	XC6123F635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HL6	ej	XC6123F636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HL7	ej	XC6123F637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HL8	ej	XC6123F638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HL9	ej	XC6123F639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLA	ej	XC6123F640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLB	ej	XC6123F641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLC	ej	XC6123F642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLD	ej	XC6123F643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLE	ej	XC6123F644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLF	ej	XC6123F645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HLH	ec	XC6123F616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLH	ej	XC6123F646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLK	ec	XC6123F617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLK	ej	XC6123F647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLL	ec	XC6123F618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLL	ej	XC6123F648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLM	ec	XC6123F619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLM	ej	XC6123F649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLN	ec	XC6123F620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLN	ej	XC6123F650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLP	ec	XC6123F621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLR	ec	XC6123F622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLS	ec	XC6123F623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLT	ec	XC6123F624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLU	ec	XC6123F625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLV	ec	XC6123F626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLX	ec	XC6123F627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLY	ec	XC6123F628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HLZ	ec	XC6123F629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HM	-	74HC1G125GW	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log14	6a	Nxp
HM	-	BU4820FWE	Vdet-IC	2.0V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HM	-	BU4820G	Vdet-IC	2.0V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HM	-	R1112N411B	LVR-IC	LDO, Low noise, 4.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
HM	-	SN74AUP1G125DCK	CMOS-Log	Bus buffer gate with 3-state output	SC-70-5	28	Log14	6g	Ti
HM	-	SN74AUP1G125DRL	CMOS-Log	Bus buffer gate with 3-state output	SOT-553	30	Log14	6g	Ti
HM0	ej	XC6123F730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HM1	ej	XC6123F731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HM2	ej	XC6123F732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HM3	ej	XC6123F733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HM4	ej	XC6123F734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HM5	ej	XC6123F735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HM6	ej	XC6123F736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HM7	ej	XC6123F737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HM8	ej	XC6123F738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HM9	ej	XC6123F739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMA	ej	XC6123F740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMB	ej	XC6123F741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMC	ej	XC6123F742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMD	ej	XC6123F743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HME	ej	XC6123F744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMF	ej	XC6123F745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMH	ec	XC6123F716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMH	ej	XC6123F746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMK	ec	XC6123F717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMK	ej	XC6123F747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HML	ec	XC6123F718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HML	ej	XC6123F748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMM	ec	XC6123F719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMM	ej	XC6123F749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMN	ec	XC6123F720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMN	ej	XC6123F750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMP	ec	XC6123F721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMR	ec	XC6123F722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMS	ec	XC6123F723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMT	ec	XC6123F724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMU	ec	XC6123F725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMV	ec	XC6123F726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMX	ec	XC6123F727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMY	ec	XC6123F728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HMZ	ec	XC6123F729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
HN	-	74HC1G126GW	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log13	6a	Nxp
HN	-	BU4821FWE	Vdet-IC	2.1V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HN	-	BU4821G	Vdet-IC	2.1V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HN	-	KRA563F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=22k	TFSV	30/TD9	TD9	6a	Kec
HN	-	R1112N421B	LVR-IC	LDO, Low noise, 4.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
HN	-	SN74AUP1G126DCK	CMOS-Log	Bus buffer gate with 3-state output	SC-70-5	28	Log13	6g	Ti
HN	-	SN74AUP1G126DRL	CMOS-Log	Bus buffer gate with 3-state output	SOT-553	30	Log13	6g	Ti
HN0	ej	XC6123A230MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HN1	ej	XC6123A231MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HN2	ej	XC6123A232MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HN3	ej	XC6123A233MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HN4	ej	XC6123A234MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HN5	ej	XC6123A235MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HN6	ej	XC6123A236MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HN7	ej	XC6123A237MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HN8	ej	XC6123A238MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HN9	ej	XC6123A239MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNA	ej	XC6123A240MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNB	ej	XC6123A241MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNC	ej	XC6123A242MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HND	ej	XC6123A243MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNE	ej	XC6123A244MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNF	ej	XC6123A245MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNH	ec	XC6123A216MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNH	ej	XC6123A246MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNK	ec	XC6123A217MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNK	ej	XC6123A247MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNL	ec	XC6123A218MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNL	ej	XC6123A248MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNM	ec	XC6123A219MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNM	ej	XC6123A249MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNN	ec	XC6123A220MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNN	ej	XC6123A250MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNP	ec	XC6123A221MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNR	ec	XC6123A222MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNS	ec	XC6123A223MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNT	ec	XC6123A224MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNU	ec	XC6123A225MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNV	ec	XC6123A226MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNX	ec	XC6123A227MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNY	ec	XC6123A228MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HNZ	ec	XC6123A229MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HP	-	BU4822FWE	Vdet-IC	2.2V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HP	-	BU4822G	Vdet-IC	2.2V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HP	-	KRA564F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=47k	TFSV	30/TD9	TD9	6a	Kec
HP	-	R1112N431B	LVR-IC	LDO, Low noise, 4.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
HP0	ej	XC6123A330MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HP1	ej	XC6123A331MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HP2	ej	XC6123A332MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HP3	ej	XC6123A333MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HP4	ej	XC6123A334MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HP5	ej	XC6123A335MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HP6	ej	XC6123A336MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HP7	ej	XC6123A337MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HP8	ej	XC6123A338MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HP9	ej	XC6123A339MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPA	ej	XC6123A340MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPB	ej	XC6123A341MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPC	ej	XC6123A342MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPD	ej	XC6123A343MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPE	ej	XC6123A344MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPF	ej	XC6123A345MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPH	ec	XC6123A316MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPH	ej	XC6123A346MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPK	ec	XC6123A317MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPK	ej	XC6123A347MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPL	ec	XC6123A318MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPL	ej	XC6123A348MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPM	ec	XC6123A319MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPM	ej	XC6123A349MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPN	ec	XC6123A320MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPN	ej	XC6123A350MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPP	ec	XC6123A321MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPR	ec	XC6123A322MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPS	ec	XC6123A323MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPT	ec	XC6123A324MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPU	ec	XC6123A325MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPV	ec	XC6123A326MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPX	ec	XC6123A327MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HPY	ec	XC6123A328MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HPZ	ec	XC6123A329MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HQ	-	BU4823FWE	Vdet-IC	2.3V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HQ	-	BU4823G	Vdet-IC	2.3V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HQ	-	R1112N441B	LVR-IC	LDO, Low noise, 4.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
HR	-	BU4824FWE	Vdet-IC	2.4V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HR	-	BU4824G	Vdet-IC	2.4V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HR	-	R1112N451B	LVR-IC	LDO, Low noise, 4.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
HR0	ej	XC6123A430MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HR1	ej	XC6123A431MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HR2	ej	XC6123A432MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HR3	ej	XC6123A433MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HR4	ej	XC6123A434MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HR5	ej	XC6123A435MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HR6	ej	XC6123A436MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HR7	ej	XC6123A437MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HR8	ej	XC6123A438MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HR9	ej	XC6123A439MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRA	ej	XC6123A440MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRB	ej	XC6123A441MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRC	ej	XC6123A442MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRD	ej	XC6123A443MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRE	ej	XC6123A444MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRF	ej	XC6123A445MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRH	ec	XC6123A416MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRH	ej	XC6123A446MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRK	ec	XC6123A417MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRK	ej	XC6123A447MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRL	ec	XC6123A418MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRL	ej	XC6123A448MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRM	ec	XC6123A419MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRM	ej	XC6123A449MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRN	ec	XC6123A420MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRN	ej	XC6123A450MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRP	ec	XC6123A421MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRR	ec	XC6123A422MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRS	ec	XC6123A423MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRT	ec	XC6123A424MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRU	ec	XC6123A425MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRV	ec	XC6123A426MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRX	ec	XC6123A427MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRY	ec	XC6123A428MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HRZ	ec	XC6123A429MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HS	-	BU4825FWE	Vdet-IC	2.5V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HS	-	BU4825G	Vdet-IC	2.5V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HS	-	R1112N461B	LVR-IC	LDO, Low noise, 4.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
HS0	ej	XC6123A530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HS1	ej	XC6123A531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HS2	ej	XC6123A532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HS3	ej	XC6123A533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HS4	ej	XC6123A534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HS5	ej	XC6123A535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HS6	ej	XC6123A536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HS7	ej	XC6123A537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HS8	ej	XC6123A538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HS9	ej	XC6123A539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSA	ej	XC6123A540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSB	ej	XC6123A541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSC	ej	XC6123A542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSD	ej	XC6123A543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSE	ej	XC6123A544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSF	ej	XC6123A545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSH	ec	XC6123A516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSH	ej	XC6123A546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSK	ec	XC6123A517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSK	ej	XC6123A547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSL	ec	XC6123A518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSL	ej	XC6123A548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSM	ec	XC6123A519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSM	ej	XC6123A549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSN	ec	XC6123A520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HSN	ej	XC6123A550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSP	ec	XC6123A521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSR	ec	XC6123A522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSS	ec	XC6123A523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HST	ec	XC6123A524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSU	ec	XC6123A525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSV	ec	XC6123A526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSX	ec	XC6123A527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSY	ec	XC6123A528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HSZ	ec	XC6123A529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HT	-	BU4826FWE	Vdet-IC	2.6V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HT	-	BU4826G	Vdet-IC	2.6V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HT	-	R1112N471B	LVR-IC	LDO, Low noise, 4.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
HT	-	SN74AUP1G06DCK	CMOS-Log	Inverter (ODO)	SC-70-5	28	Log19	6g	Ti
HT0	ej	XC6123A730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HT1	ej	XC6123A731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HT2	ej	XC6123A732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HT3	ej	XC6123A733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HT4	ej	XC6123A734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HT5	ej	XC6123A735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HT6	ej	XC6123A736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HT7	ej	XC6123A737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HT8	ej	XC6123A738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HT9	ej	XC6123A739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTA	ej	XC6123A740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTB	ej	XC6123A741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTC	ej	XC6123A742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTD	ej	XC6123A743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTE	ej	XC6123A744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTF	ej	XC6123A745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTH	ec	XC6123A716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTH	ej	XC6123A746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTK	ec	XC6123A717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTK	ej	XC6123A747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTL	ec	XC6123A718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTL	ej	XC6123A748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTM	ec	XC6123A719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTM	ej	XC6123A749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTN	ec	XC6123A720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTN	ej	XC6123A750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTP	ec	XC6123A721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTR	ec	XC6123A722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTS	ec	XC6123A723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTT	ec	XC6123A724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTU	ec	XC6123A725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTV	ec	XC6123A726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTX	ec	XC6123A727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTY	ec	XC6123A728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HTZ	ec	XC6123A729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HU	-	AAT3510IGV-2.93-C-C	Vdet-IC	2.93V±1.5%, -MR, -Reset PPO	SOT-23-5	28cp	VD17	6k	Ant
HU	-	BU4827FWE	Vdet-IC	2.7V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HU	-	BU4827G	Vdet-IC	2.7V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HU	-	R1112N481B	LVR-IC	LDO, Low noise, 4.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
HU0	ej	XC6123A630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HU1	ej	XC6123A631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HU2	ej	XC6123A632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HU3	ej	XC6123A633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HU4	-	74HC1GU04GV	CMOS-Log	Inverter	SOT753	28	Log6	6a	Nxp
HU4	ej	XC6123A634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HU5	ej	XC6123A635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HU6	ej	XC6123A636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HU7	ej	XC6123A637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HU8	ej	XC6123A638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HU9	ej	XC6123A639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUA	ej	XC6123A640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUB	ej	XC6123A641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUC	ej	XC6123A642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUD	ej	XC6123A643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUE	ej	XC6123A644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUF	ej	XC6123A645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HUH	ec	XC6123A616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUH	ej	XC6123A646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUK	ec	XC6123A617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUK	ej	XC6123A647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUL	ec	XC6123A618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUL	ej	XC6123A648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUM	ec	XC6123A619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUM	ej	XC6123A649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUN	ec	XC6123A620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUN	ej	XC6123A650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUP	ec	XC6123A621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUR	ec	XC6123A622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUS	ec	XC6123A623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUT	ec	XC6123A624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUU	ec	XC6123A625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUV	ec	XC6123A626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUX	ec	XC6123A627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUY	ec	XC6123A628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HUZ	ec	XC6123A629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
HV	-	AAT3510IGV-2.63-C-C	Vdet-IC	2.63V±1.5%, -MR, -Reset PPO	SOT-23-5	28cp	VD17	6k	Ant
HV	-	BU4828FWE	Vdet-IC	2.8V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HV	-	BU4828G	Vdet-IC	2.8V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HV	-	R1112N491B	LVR-IC	LDO, Low noise, 4.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
HV	-	SN74AUP1G07DCK	CMOS-Log	Noninverting buffer/driver (ODO)	SC-70-5	28	Log8	6g	Ti
HV	-	SN74AUP1G07DRL	CMOS-Log	Noninverting buffer/driver (ODO)	SOT-553	30	Log8	6g	Ti
HV	-	TC6501P120VCT	Tdet-IC	120°C±0.5°C, -Tover ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
HV0	ej	XC6123C230MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HV1	ej	XC6123C231MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HV2	ej	XC6123C232MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HV3	ej	XC6123C233MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HV4	ej	XC6123C234MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HV5	ej	XC6123C235MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HV6	ej	XC6123C236MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HV7	ej	XC6123C237MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HV8	ej	XC6123C238MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HV9	ej	XC6123C239MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVA	ej	XC6123C240MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVB	ej	XC6123C241MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVC	ej	XC6123C242MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVD	ej	XC6123C243MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVE	ej	XC6123C244MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVF	ej	XC6123C245MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVH	ec	XC6123C216MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVH	ej	XC6123C246MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVK	ec	XC6123C217MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVK	ej	XC6123C247MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVL	ec	XC6123C218MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVL	ej	XC6123C248MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVM	ec	XC6123C219MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVM	ej	XC6123C249MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVN	ec	XC6123C220MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVN	ej	XC6123C250MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVP	ec	XC6123C221MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVR	ec	XC6123C222MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVS	ec	XC6123C223MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVT	ec	XC6123C224MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVU	ec	XC6123C225MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVV	ec	XC6123C226MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVX	ec	XC6123C227MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVY	ec	XC6123C228MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HVZ	ec	XC6123C229MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HW	-	BU4829FWE	Vdet-IC	2.9V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HW	-	BU4829G	Vdet-IC	2.9V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HW	-	SN74AUP1G79DCK	CMOS-Log	Positive edge-triggered D-type flip-flop	SC-70-5	28	Log20	6g	Ti
HW	-	SN74AUP1G79DRL	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT-553	30	Log20	6g	Ti
HW	-	TC7SH125FS	CMOS-Log	Bus buffer gate with 3-state output	SON-5	30	Log14	6a	Tos
HX	-	BU4830FWE	Vdet-IC	3.0V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HX	-	BU4830G	Vdet-IC	3.0V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HX	-	SN74AUP1G80DCK	CMOS-Log	Positive edge-triggered D-type flip-flop	SC-70-5	28	Log21	6g	Ti
HX0	ej	XC6123C330MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HX1	ej	XC6123C331MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HX2	ej	XC6123C332MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HX3	ej	XC6123C333MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HX4	ej	XC6123C334MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HX5	ej	XC6123C335MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HX6	ej	XC6123C336MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HX7	ej	XC6123C337MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HX8	ej	XC6123C338MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HX9	ej	XC6123C339MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXA	ej	XC6123C340MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXB	ej	XC6123C341MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXC	ej	XC6123C342MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXD	ej	XC6123C343MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXE	ej	XC6123C344MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXF	ej	XC6123C345MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXH	ec	XC6123C316MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXH	ej	XC6123C346MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXK	ec	XC6123C317MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXK	ej	XC6123C347MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXL	ec	XC6123C318MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXL	ej	XC6123C348MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXM	ec	XC6123C319MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXM	ej	XC6123C349MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXN	ec	XC6123C320MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXN	ej	XC6123C350MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXP	ec	XC6123C321MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXR	ec	XC6123C322MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXS	ec	XC6123C323MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXT	ec	XC6123C324MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXU	ec	XC6123C325MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXV	ec	XC6123C326MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXX	ec	XC6123C327MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXY	ec	XC6123C328MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HXZ	ec	XC6123C329MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HY	-	BU4831FWE	Vdet-IC	3.1V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HY	-	BU4831G	Vdet-IC	3.1V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HY0	ej	XC6123C430MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HY1	ej	XC6123C431MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HY2	ej	XC6123C432MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HY3	ej	XC6123C433MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HY4	ej	XC6123C434MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HY5	ej	XC6123C435MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HY6	ej	XC6123C436MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HY7	ej	XC6123C437MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HY8	ej	XC6123C438MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HY9	ej	XC6123C439MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYA	ej	XC6123C440MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYB	ej	XC6123C441MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYC	ej	XC6123C442MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYD	ej	XC6123C443MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYE	ej	XC6123C444MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYF	ej	XC6123C445MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYH	ec	XC6123C416MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYH	ej	XC6123C446MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYK	ec	XC6123C417MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYK	ej	XC6123C447MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYL	ec	XC6123C418MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYL	ej	XC6123C448MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYM	ec	XC6123C419MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYM	ej	XC6123C449MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYN	ec	XC6123C420MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYN	ej	XC6123C450MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYP	ec	XC6123C421MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYR	ec	XC6123C422MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYS	ec	XC6123C423MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYT	ec	XC6123C424MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYU	ec	XC6123C425MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYV	ec	XC6123C426MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYX	ec	XC6123C427MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HYY	ec	XC6123C428MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HYZ	ec	XC6123C429MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZ	-	BU4832FWE	Vdet-IC	3.2V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
HZ	-	BU4832G	Vdet-IC	3.2V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
HZ0	ej	XC6123C530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZ1	ej	XC6123C531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZ2	ej	XC6123C532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZ3	ej	XC6123C533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZ4	ej	XC6123C534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZ5	ej	XC6123C535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZ6	ej	XC6123C536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZ7	ej	XC6123C537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZ8	ej	XC6123C538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZ9	ej	XC6123C539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZA	ej	XC6123C540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZB	ej	XC6123C541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZC	ej	XC6123C542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZD	ej	XC6123C543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZE	ej	XC6123C544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZF	ej	XC6123C545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZH	ec	XC6123C516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZH	ej	XC6123C546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZK	ec	XC6123C517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZK	ej	XC6123C547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZL	ec	XC6123C518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZL	ej	XC6123C548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZM	ec	XC6123C519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZM	ej	XC6123C549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZN	ec	XC6123C520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZN	ej	XC6123C550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZP	ec	XC6123C521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZR	ec	XC6123C522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZS	ec	XC6123C523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZT	ec	XC6123C524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZU	ec	XC6123C525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZV	ec	XC6123C526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZX	ec	XC6123C527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZY	ec	XC6123C528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
HZZ	ec	XC6123C529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
I0	-	RT9167-15CBR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
I0	eu	BL8555-20UQ	LVR-IC	LDO, 2.0V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I0	eu	BL8555-20URA	LVR-IC	LDO, 2.0V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I0	eu	BL8555-20URB	LVR-IC	LDO, 2.0V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I0	eu	LR8555-20UQ	LVR-IC	LDO, 2.0V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I0	eu	LR8555-20URA	LVR-IC	LDO, 2.0V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I0	eu	LR8555-20URB	LVR-IC	LDO, 2.0V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I0	fg	BL8555-30UQ	LVR-IC	LDO, 3.0V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I0	fg	BL8555-30URA	LVR-IC	LDO, 3.0V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I0	fg	BL8555-30URB	LVR-IC	LDO, 3.0V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I0	fg	LR8555-30UQ	LVR-IC	LDO, 3.0V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I0	fg	LR8555-30URA	LVR-IC	LDO, 3.0V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I0	fg	LR8555-30URB	LVR-IC	LDO, 3.0V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I0	fh	BL8555-40UQ	LVR-IC	LDO, 4.0V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I0	fh	BL8555-40URA	LVR-IC	LDO, 4.0V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I0	fh	BL8555-40URB	LVR-IC	LDO, 4.0V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I0	fh	LR8555-40UQ	LVR-IC	LDO, 4.0V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I0	fh	LR8555-40URA	LVR-IC	LDO, 4.0V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I0	fh	LR8555-40URB	LVR-IC	LDO, 4.0V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I0	fi	BL8555-50UQ	LVR-IC	LDO, 5.0V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I0	fi	BL8555-50URA	LVR-IC	LDO, 5.0V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I0	fi	BL8555-50URB	LVR-IC	LDO, 5.0V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I0	fi	LR8555-50UQ	LVR-IC	LDO, 5.0V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I0	fi	LR8555-50URA	LVR-IC	LDO, 5.0V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I0	fi	LR8555-50URB	LVR-IC	LDO, 5.0V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I0	fk	BL8555-30IQ	LVR-IC	LDO, 3.0V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I0	fk	BL8555-30IRA	LVR-IC	LDO, 3.0V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I0	fk	BL8555-30IRB	LVR-IC	LDO, 3.0V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I0	fk	LR8555-30IQ	LVR-IC	LDO, 3.0V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I0	fk	LR8555-30IRA	LVR-IC	LDO, 3.0V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I0	fk	LR8555-30IRB	LVR-IC	LDO, 3.0V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I0	fm	BL8555-40IQ	LVR-IC	LDO, 4.0V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
I0	fm	BL8555-40IRA	LVR-IC	LDO, 4.0V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I0	fm	BL8555-40IRB	LVR-IC	LDO, 4.0V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I0	fm	LR8555-40IQ	LVR-IC	LDO, 4.0V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I0	fm	LR8555-40IRA	LVR-IC	LDO, 4.0V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I0	fm	LR8555-40IRB	LVR-IC	LDO, 4.0V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I0	fn	BL8555-50IQ	LVR-IC	LDO, 5.0V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I0	fn	BL8555-50IRA	LVR-IC	LDO, 5.0V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I0	fn	BL8555-50IRB	LVR-IC	LDO, 5.0V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I0	fn	LR8555-50IQ	LVR-IC	LDO, 5.0V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I0	fn	LR8555-50IRA	LVR-IC	LDO, 5.0V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I0	fn	LR8555-50IRB	LVR-IC	LDO, 5.0V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I0	fp	BL8555-20IQ	LVR-IC	LDO, 2.0V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I0	fp	BL8555-20IRA	LVR-IC	LDO, 2.0V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I0	fp	BL8555-20IRB	LVR-IC	LDO, 2.0V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I0	fp	LR8555-20IQ	LVR-IC	LDO, 2.0V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I0	fp	LR8555-20IRA	LVR-IC	LDO, 2.0V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I0	fp	LR8555-20IRB	LVR-IC	LDO, 2.0V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I1	-	RT9167-16CBR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
I1	eu	BL8555-21UQ	LVR-IC	LDO, 2.1V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I1	eu	BL8555-21URA	LVR-IC	LDO, 2.1V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I1	eu	BL8555-21URB	LVR-IC	LDO, 2.1V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I1	eu	LR8555-21UQ	LVR-IC	LDO, 2.1V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I1	eu	LR8555-21URA	LVR-IC	LDO, 2.1V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I1	eu	LR8555-21URB	LVR-IC	LDO, 2.1V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I1	fg	BL8555-31UQ	LVR-IC	LDO, 3.1V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I1	fg	BL8555-31URA	LVR-IC	LDO, 3.1V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I1	fg	BL8555-31URB	LVR-IC	LDO, 3.1V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I1	fg	LR8555-31UQ	LVR-IC	LDO, 3.1V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I1	fg	LR8555-31URA	LVR-IC	LDO, 3.1V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I1	fg	LR8555-31URB	LVR-IC	LDO, 3.1V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I1	fh	BL8555-41UQ	LVR-IC	LDO, 4.1V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I1	fh	BL8555-41URA	LVR-IC	LDO, 4.1V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I1	fh	BL8555-41URB	LVR-IC	LDO, 4.1V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I1	fh	LR8555-41UQ	LVR-IC	LDO, 4.1V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I1	fh	LR8555-41URA	LVR-IC	LDO, 4.1V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I1	fh	LR8555-41URB	LVR-IC	LDO, 4.1V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I1	fk	BL8555-31IQ	LVR-IC	LDO, 3.1V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I1	fk	BL8555-31IRA	LVR-IC	LDO, 3.1V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I1	fk	BL8555-31IRB	LVR-IC	LDO, 3.1V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I1	fk	LR8555-31IQ	LVR-IC	LDO, 3.1V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I1	fk	LR8555-31IRA	LVR-IC	LDO, 3.1V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I1	fk	LR8555-31IRB	LVR-IC	LDO, 3.1V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I1	fm	BL8555-41IQ	LVR-IC	LDO, 4.1V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I1	fm	BL8555-41IRA	LVR-IC	LDO, 4.1V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I1	fm	BL8555-41IRB	LVR-IC	LDO, 4.1V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I1	fm	LR8555-41IQ	LVR-IC	LDO, 4.1V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I1	fm	LR8555-41IRA	LVR-IC	LDO, 4.1V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I1	fm	LR8555-41IRB	LVR-IC	LDO, 4.1V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I1	fp	BL8555-21IQ	LVR-IC	LDO, 2.1V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I1	fp	BL8555-21IRA	LVR-IC	LDO, 2.1V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I1	fp	BL8555-21IRB	LVR-IC	LDO, 2.1V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I1	fp	LR8555-21IQ	LVR-IC	LDO, 2.1V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I1	fp	LR8555-21IRA	LVR-IC	LDO, 2.1V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I1	fp	LR8555-21IRB	LVR-IC	LDO, 2.1V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I2	-	BL8555-12IQ	LVR-IC	LDO, 1.2V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I2	-	BL8555-12IRA	LVR-IC	LDO, 1.2V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I2	-	BL8555-12IRB	LVR-IC	LDO, 1.2V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I2	-	LR8555-12IQ	LVR-IC	LDO, 1.2V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I2	-	LR8555-12IRA	LVR-IC	LDO, 1.2V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I2	-	LR8555-12IRB	LVR-IC	LDO, 1.2V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I2	-	RT9167-17CBR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
I2	ea	BL8555-12UQ	LVR-IC	LDO, 1.2V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I2	ea	BL8555-12URA	LVR-IC	LDO, 1.2V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I2	ea	BL8555-12URB	LVR-IC	LDO, 1.2V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I2	ea	LR8555-12UQ	LVR-IC	LDO, 1.2V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I2	ea	LR8555-12URA	LVR-IC	LDO, 1.2V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I2	ea	LR8555-12URB	LVR-IC	LDO, 1.2V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I2	eu	BL8555-22UQ	LVR-IC	LDO, 2.2V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I2	eu	BL8555-22URA	LVR-IC	LDO, 2.2V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I2	eu	BL8555-22URB	LVR-IC	LDO, 2.2V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
I2	eu	LR8555-22UQ	LVR-IC	LDO, 2.2V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I2	eu	LR8555-22URA	LVR-IC	LDO, 2.2V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I2	eu	LR8555-22URB	LVR-IC	LDO, 2.2V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I2	fg	BL8555-32UQ	LVR-IC	LDO, 3.2V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I2	fg	BL8555-32URA	LVR-IC	LDO, 3.2V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I2	fg	BL8555-32URB	LVR-IC	LDO, 3.2V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I2	fg	LR8555-32UQ	LVR-IC	LDO, 3.2V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I2	fg	LR8555-32URA	LVR-IC	LDO, 3.2V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I2	fg	LR8555-32URB	LVR-IC	LDO, 3.2V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I2	fh	BL8555-42UQ	LVR-IC	LDO, 4.2V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I2	fh	BL8555-42URA	LVR-IC	LDO, 4.2V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I2	fh	BL8555-42URB	LVR-IC	LDO, 4.2V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I2	fh	LR8555-42UQ	LVR-IC	LDO, 4.2V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I2	fh	LR8555-42URA	LVR-IC	LDO, 4.2V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I2	fh	LR8555-42URB	LVR-IC	LDO, 4.2V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I2	fk	BL8555-32IQ	LVR-IC	LDO, 3.2V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I2	fk	BL8555-32IRA	LVR-IC	LDO, 3.2V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I2	fk	BL8555-32IRB	LVR-IC	LDO, 3.2V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I2	fk	LR8555-32IQ	LVR-IC	LDO, 3.2V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I2	fk	LR8555-32IRA	LVR-IC	LDO, 3.2V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I2	fk	LR8555-32IRB	LVR-IC	LDO, 3.2V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I2	fm	BL8555-42IQ	LVR-IC	LDO, 4.2V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I2	fm	BL8555-42IRA	LVR-IC	LDO, 4.2V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I2	fm	BL8555-42IRB	LVR-IC	LDO, 4.2V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I2	fm	LR8555-42IQ	LVR-IC	LDO, 4.2V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I2	fm	LR8555-42IRA	LVR-IC	LDO, 4.2V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I2	fm	LR8555-42IRB	LVR-IC	LDO, 4.2V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I2	fp	BL8555-22IQ	LVR-IC	LDO, 2.2V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I2	fp	BL8555-22IRA	LVR-IC	LDO, 2.2V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I2	fp	BL8555-22IRB	LVR-IC	LDO, 2.2V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I2	fp	LR8555-22IQ	LVR-IC	LDO, 2.2V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I2	fp	LR8555-22IRA	LVR-IC	LDO, 2.2V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I2	fp	LR8555-22IRB	LVR-IC	LDO, 2.2V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I3	-	BL8555-13IQ	LVR-IC	LDO, 1.3V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I3	-	BL8555-13IRA	LVR-IC	LDO, 1.3V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I3	-	BL8555-13IRB	LVR-IC	LDO, 1.3V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I3	-	LR8555-13IQ	LVR-IC	LDO, 1.3V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I3	-	LR8555-13IRA	LVR-IC	LDO, 1.3V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I3	-	LR8555-13IRB	LVR-IC	LDO, 1.3V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I3	-	RT9167-18CBR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
I3	ea	BL8555-13UQ	LVR-IC	LDO, 1.3V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I3	ea	BL8555-13URA	LVR-IC	LDO, 1.3V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I3	ea	BL8555-13URB	LVR-IC	LDO, 1.3V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I3	ea	LR8555-13UQ	LVR-IC	LDO, 1.3V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I3	ea	LR8555-13URA	LVR-IC	LDO, 1.3V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I3	ea	LR8555-13URB	LVR-IC	LDO, 1.3V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I3	eu	BL8555-23UQ	LVR-IC	LDO, 2.3V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I3	eu	BL8555-23URA	LVR-IC	LDO, 2.3V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I3	eu	BL8555-23URB	LVR-IC	LDO, 2.3V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I3	eu	LR8555-23UQ	LVR-IC	LDO, 2.3V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I3	eu	LR8555-23URA	LVR-IC	LDO, 2.3V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I3	eu	LR8555-23URB	LVR-IC	LDO, 2.3V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I3	fg	BL8555-33UQ	LVR-IC	LDO, 3.3V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I3	fg	BL8555-33URA	LVR-IC	LDO, 3.3V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I3	fg	BL8555-33URB	LVR-IC	LDO, 3.3V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I3	fg	LR8555-33UQ	LVR-IC	LDO, 3.3V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I3	fg	LR8555-33URA	LVR-IC	LDO, 3.3V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I3	fg	LR8555-33URB	LVR-IC	LDO, 3.3V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I3	fh	BL8555-43UQ	LVR-IC	LDO, 4.3V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I3	fh	BL8555-43URA	LVR-IC	LDO, 4.3V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I3	fh	BL8555-43URB	LVR-IC	LDO, 4.3V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I3	fh	LR8555-43UQ	LVR-IC	LDO, 4.3V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I3	fh	LR8555-43URA	LVR-IC	LDO, 4.3V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I3	fh	LR8555-43URB	LVR-IC	LDO, 4.3V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I3	fk	BL8555-33IQ	LVR-IC	LDO, 3.3V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I3	fk	BL8555-33IRA	LVR-IC	LDO, 3.3V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I3	fk	BL8555-33IRB	LVR-IC	LDO, 3.3V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I3	fk	LR8555-33IQ	LVR-IC	LDO, 3.3V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I3	fk	LR8555-33IRA	LVR-IC	LDO, 3.3V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I3	fk	LR8555-33IRB	LVR-IC	LDO, 3.3V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
I3	fm	BL8555-43IQ	LVR-IC	LDO, 4.3V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I3	fm	BL8555-43IRA	LVR-IC	LDO, 4.3V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I3	fm	BL8555-43IRB	LVR-IC	LDO, 4.3V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I3	fm	LR8555-43IQ	LVR-IC	LDO, 4.3V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I3	fm	LR8555-43IRA	LVR-IC	LDO, 4.3V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I3	fm	LR8555-43IRB	LVR-IC	LDO, 4.3V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I3	fp	BL8555-23IQ	LVR-IC	LDO, 2.3V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I3	fp	BL8555-23IRA	LVR-IC	LDO, 2.3V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I3	fp	BL8555-23IRB	LVR-IC	LDO, 2.3V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I3	fp	LR8555-23IQ	LVR-IC	LDO, 2.3V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I3	fp	LR8555-23IRA	LVR-IC	LDO, 2.3V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I3	fp	LR8555-23IRB	LVR-IC	LDO, 2.3V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I4	-	BL8555-14IQ	LVR-IC	LDO, 1.4V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I4	-	BL8555-14IRA	LVR-IC	LDO, 1.4V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I4	-	BL8555-14IRB	LVR-IC	LDO, 1.4V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I4	-	LR8555-14IQ	LVR-IC	LDO, 1.4V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I4	-	LR8555-14IRA	LVR-IC	LDO, 1.4V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I4	-	LR8555-14IRB	LVR-IC	LDO, 1.4V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I4	-	RT9167-19CBR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
I4	ea	BL8555-14UQ	LVR-IC	LDO, 1.4V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I4	ea	BL8555-14URA	LVR-IC	LDO, 1.4V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I4	ea	BL8555-14URB	LVR-IC	LDO, 1.4V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I4	ea	LR8555-14UQ	LVR-IC	LDO, 1.4V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I4	ea	LR8555-14URA	LVR-IC	LDO, 1.4V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I4	ea	LR8555-14URB	LVR-IC	LDO, 1.4V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I4	eu	BL8555-24UQ	LVR-IC	LDO, 2.4V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I4	eu	BL8555-24URA	LVR-IC	LDO, 2.4V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I4	eu	BL8555-24URB	LVR-IC	LDO, 2.4V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I4	eu	LR8555-24UQ	LVR-IC	LDO, 2.4V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I4	eu	LR8555-24URA	LVR-IC	LDO, 2.4V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I4	eu	LR8555-24URB	LVR-IC	LDO, 2.4V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I4	fg	BL8555-34UQ	LVR-IC	LDO, 3.4V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I4	fg	BL8555-34URA	LVR-IC	LDO, 3.4V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I4	fg	BL8555-34URB	LVR-IC	LDO, 3.4V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I4	fg	LR8555-34UQ	LVR-IC	LDO, 3.4V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I4	fg	LR8555-34URA	LVR-IC	LDO, 3.4V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I4	fg	LR8555-34URB	LVR-IC	LDO, 3.4V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I4	fh	BL8555-44UQ	LVR-IC	LDO, 4.4V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I4	fh	BL8555-44URA	LVR-IC	LDO, 4.4V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I4	fh	BL8555-44URB	LVR-IC	LDO, 4.4V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I4	fh	LR8555-44UQ	LVR-IC	LDO, 4.4V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I4	fh	LR8555-44URA	LVR-IC	LDO, 4.4V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I4	fh	LR8555-44URB	LVR-IC	LDO, 4.4V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I4	fk	BL8555-34IQ	LVR-IC	LDO, 3.4V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I4	fk	BL8555-34IRB	LVR-IC	LDO, 3.4V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I4	fk	BL8555-34PIA	LVR-IC	LDO, 3.4V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I4	fk	LR8555-34IQ	LVR-IC	LDO, 3.4V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I4	fk	LR8555-34IRB	LVR-IC	LDO, 3.4V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I4	fk	LR8555-34PIA	LVR-IC	LDO, 3.4V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I4	fm	BL8555-44IQ	LVR-IC	LDO, 4.4V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I4	fm	BL8555-44IRA	LVR-IC	LDO, 4.4V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I4	fm	BL8555-44IRB	LVR-IC	LDO, 4.4V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I4	fm	LR8555-44IQ	LVR-IC	LDO, 4.4V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I4	fm	LR8555-44IRA	LVR-IC	LDO, 4.4V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I4	fm	LR8555-44IRB	LVR-IC	LDO, 4.4V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I4	fp	BL8555-24IQ	LVR-IC	LDO, 2.4V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I4	fp	BL8555-24IRA	LVR-IC	LDO, 2.4V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I4	fp	BL8555-24IRB	LVR-IC	LDO, 2.4V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I4	fp	LR8555-24IQ	LVR-IC	LDO, 2.4V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I4	fp	LR8555-24IRA	LVR-IC	LDO, 2.4V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I4	fp	LR8555-24IRB	LVR-IC	LDO, 2.4V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I5	-	BL8555-15IQ	LVR-IC	LDO, 1.5V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I5	-	BL8555-15IRA	LVR-IC	LDO, 1.5V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I5	-	BL8555-15IRB	LVR-IC	LDO, 1.5V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I5	-	LR8555-15IQ	LVR-IC	LDO, 1.5V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I5	-	LR8555-15IRA	LVR-IC	LDO, 1.5V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I5	-	LR8555-15IRB	LVR-IC	LDO, 1.5V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I5	-	RT9167-20CBR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
I5	ea	BL8555-15UQ	LVR-IC	LDO, 1.5V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I5	ea	BL8555-15URA	LVR-IC	LDO, 1.5V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
I5	ea	BL8555-15URB	LVR-IC	LDO, 1.5V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I5	ea	LR8555-15UQ	LVR-IC	LDO, 1.5V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I5	ea	LR8555-15URA	LVR-IC	LDO, 1.5V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I5	ea	LR8555-15URB	LVR-IC	LDO, 1.5V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I5	eu	BL8555-25UQ	LVR-IC	LDO, 2.5V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I5	eu	BL8555-25URA	LVR-IC	LDO, 2.5V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I5	eu	BL8555-25URB	LVR-IC	LDO, 2.5V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I5	eu	LR8555-25UQ	LVR-IC	LDO, 2.5V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I5	eu	LR8555-25URA	LVR-IC	LDO, 2.5V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I5	eu	LR8555-25URB	LVR-IC	LDO, 2.5V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I5	fg	BL8555-35UQ	LVR-IC	LDO, 3.5V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I5	fg	BL8555-35URA	LVR-IC	LDO, 3.5V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I5	fg	BL8555-35URB	LVR-IC	LDO, 3.5V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I5	fg	LR8555-35UQ	LVR-IC	LDO, 3.5V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I5	fg	LR8555-35URA	LVR-IC	LDO, 3.5V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I5	fg	LR8555-35URB	LVR-IC	LDO, 3.5V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I5	fh	BL8555-45UQ	LVR-IC	LDO, 4.5V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I5	fh	BL8555-45URA	LVR-IC	LDO, 4.5V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I5	fh	BL8555-45URB	LVR-IC	LDO, 4.5V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I5	fh	LR8555-45UQ	LVR-IC	LDO, 4.5V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I5	fh	LR8555-45URA	LVR-IC	LDO, 4.5V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I5	fh	LR8555-45URB	LVR-IC	LDO, 4.5V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I5	fk	BL8555-35IQ	LVR-IC	LDO, 3.5V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I5	fk	BL8555-35IRA	LVR-IC	LDO, 3.5V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I5	fk	BL8555-35IRB	LVR-IC	LDO, 3.5V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I5	fk	LR8555-35IQ	LVR-IC	LDO, 3.5V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I5	fk	LR8555-35IRA	LVR-IC	LDO, 3.5V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I5	fk	LR8555-35IRB	LVR-IC	LDO, 3.5V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I5	fm	BL8555-45IQ	LVR-IC	LDO, 4.5V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I5	fm	BL8555-45IRA	LVR-IC	LDO, 4.5V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I5	fm	BL8555-45IRB	LVR-IC	LDO, 4.5V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I5	fm	LR8555-45IQ	LVR-IC	LDO, 4.5V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I5	fm	LR8555-45IRA	LVR-IC	LDO, 4.5V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I5	fm	LR8555-45IRB	LVR-IC	LDO, 4.5V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I5	fp	BL8555-25IQ	LVR-IC	LDO, 2.5V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I5	fp	BL8555-25IRA	LVR-IC	LDO, 2.5V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I5	fp	BL8555-25IRB	LVR-IC	LDO, 2.5V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I5	fp	LR8555-25IQ	LVR-IC	LDO, 2.5V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I5	fp	LR8555-25IRA	LVR-IC	LDO, 2.5V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I5	fp	LR8555-25IRB	LVR-IC	LDO, 2.5V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I6	-	BL8555-16IQ	LVR-IC	LDO, 1.6V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I6	-	BL8555-16IRA	LVR-IC	LDO, 1.6V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I6	-	BL8555-16IRB	LVR-IC	LDO, 1.6V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I6	-	LR8555-16IQ	LVR-IC	LDO, 1.6V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I6	-	LR8555-16IRA	LVR-IC	LDO, 1.6V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I6	-	LR8555-16IRB	LVR-IC	LDO, 1.6V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I6	-	RT9167-21CBR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
I6	ea	BL8555-16UQ	LVR-IC	LDO, 1.6V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I6	ea	BL8555-16URA	LVR-IC	LDO, 1.6V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I6	ea	BL8555-16URB	LVR-IC	LDO, 1.6V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I6	ea	LR8555-16UQ	LVR-IC	LDO, 1.6V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I6	ea	LR8555-16URA	LVR-IC	LDO, 1.6V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I6	ea	LR8555-16URB	LVR-IC	LDO, 1.6V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I6	eu	BL8555-26UQ	LVR-IC	LDO, 2.6V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I6	eu	BL8555-26URA	LVR-IC	LDO, 2.6V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I6	eu	BL8555-26URB	LVR-IC	LDO, 2.6V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I6	eu	LR8555-26UQ	LVR-IC	LDO, 2.6V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I6	eu	LR8555-26URA	LVR-IC	LDO, 2.6V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I6	eu	LR8555-26URB	LVR-IC	LDO, 2.6V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I6	fg	BL8555-36UQ	LVR-IC	LDO, 3.6V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I6	fg	BL8555-36URA	LVR-IC	LDO, 3.6V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I6	fg	BL8555-36URB	LVR-IC	LDO, 3.6V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I6	fg	LR8555-36UQ	LVR-IC	LDO, 3.6V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I6	fg	LR8555-36URA	LVR-IC	LDO, 3.6V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I6	fg	LR8555-36URB	LVR-IC	LDO, 3.6V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I6	fh	BL8555-46UQ	LVR-IC	LDO, 4.6V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I6	fh	BL8555-46URA	LVR-IC	LDO, 4.6V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I6	fh	BL8555-46URB	LVR-IC	LDO, 4.6V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I6	fh	LR8555-46UQ	LVR-IC	LDO, 4.6V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I6	fh	LR8555-46URA	LVR-IC	LDO, 4.6V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
I6	fh	LR8555-46URB	LVR-IC	LDO, 4.6V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I6	fk	BL8555-36IQ	LVR-IC	LDO, 3.6V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I6	fk	BL8555-36IRA	LVR-IC	LDO, 3.6V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I6	fk	BL8555-36IRB	LVR-IC	LDO, 3.6V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I6	fk	LR8555-36IQ	LVR-IC	LDO, 3.6V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I6	fk	LR8555-36IRA	LVR-IC	LDO, 3.6V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I6	fk	LR8555-36IRB	LVR-IC	LDO, 3.6V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I6	fm	BL8555-46IQ	LVR-IC	LDO, 4.6V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I6	fm	BL8555-46IRA	LVR-IC	LDO, 4.6V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I6	fm	BL8555-46IRB	LVR-IC	LDO, 4.6V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I6	fm	LR8555-46IQ	LVR-IC	LDO, 4.6V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I6	fm	LR8555-46IRA	LVR-IC	LDO, 4.6V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I6	fm	LR8555-46IRB	LVR-IC	LDO, 4.6V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I6	fp	BL8555-26IQ	LVR-IC	LDO, 2.6V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I6	fp	BL8555-26IRA	LVR-IC	LDO, 2.6V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I6	fp	BL8555-26IRB	LVR-IC	LDO, 2.6V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I6	fp	LR8555-26IQ	LVR-IC	LDO, 2.6V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I6	fp	LR8555-26IRA	LVR-IC	LDO, 2.6V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I6	fp	LR8555-26IRB	LVR-IC	LDO, 2.6V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I7	-	BL8555-17IQ	LVR-IC	LDO, 1.7V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I7	-	BL8555-17IRA	LVR-IC	LDO, 1.7V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I7	-	BL8555-17IRB	LVR-IC	LDO, 1.7V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I7	-	LR8555-17IQ	LVR-IC	LDO, 1.7V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I7	-	LR8555-17IRA	LVR-IC	LDO, 1.7V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I7	-	LR8555-17IRB	LVR-IC	LDO, 1.7V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I7	-	RT9167-22CBR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
I7	ea	BL8555-17UQ	LVR-IC	LDO, 1.7V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I7	ea	BL8555-17URA	LVR-IC	LDO, 1.7V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I7	ea	BL8555-17URB	LVR-IC	LDO, 1.7V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I7	ea	LR8555-17UQ	LVR-IC	LDO, 1.7V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I7	ea	LR8555-17URA	LVR-IC	LDO, 1.7V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I7	ea	LR8555-17URB	LVR-IC	LDO, 1.7V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I7	eu	BL8555-27UQ	LVR-IC	LDO, 2.7V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I7	eu	BL8555-27URA	LVR-IC	LDO, 2.7V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I7	eu	BL8555-27URB	LVR-IC	LDO, 2.7V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I7	eu	LR8555-27UQ	LVR-IC	LDO, 2.7V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I7	eu	LR8555-27URA	LVR-IC	LDO, 2.7V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I7	eu	LR8555-27URB	LVR-IC	LDO, 2.7V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I7	fg	BL8555-37UQ	LVR-IC	LDO, 3.7V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I7	fg	BL8555-37URA	LVR-IC	LDO, 3.7V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I7	fg	BL8555-37URB	LVR-IC	LDO, 3.7V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I7	fg	LR8555-37UQ	LVR-IC	LDO, 3.7V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I7	fg	LR8555-37URA	LVR-IC	LDO, 3.7V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I7	fg	LR8555-37URB	LVR-IC	LDO, 3.7V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I7	fh	BL8555-47UQ	LVR-IC	LDO, 4.7V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I7	fh	BL8555-47URA	LVR-IC	LDO, 4.7V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I7	fh	BL8555-47URB	LVR-IC	LDO, 4.7V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I7	fh	LR8555-47UQ	LVR-IC	LDO, 4.7V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I7	fh	LR8555-47URA	LVR-IC	LDO, 4.7V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I7	fh	LR8555-47URB	LVR-IC	LDO, 4.7V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I7	fk	BL8555-37IQ	LVR-IC	LDO, 3.7V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I7	fk	BL8555-37IRA	LVR-IC	LDO, 3.7V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I7	fk	BL8555-37IRB	LVR-IC	LDO, 3.7V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I7	fk	LR8555-37IQ	LVR-IC	LDO, 3.7V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I7	fk	LR8555-37IRA	LVR-IC	LDO, 3.7V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I7	fk	LR8555-37IRB	LVR-IC	LDO, 3.7V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I7	fm	BL8555-47IQ	LVR-IC	LDO, 4.7V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I7	fm	BL8555-47IRA	LVR-IC	LDO, 4.7V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I7	fm	BL8555-47IRB	LVR-IC	LDO, 4.7V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I7	fm	LR8555-47IQ	LVR-IC	LDO, 4.7V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I7	fm	LR8555-47IRA	LVR-IC	LDO, 4.7V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I7	fm	LR8555-47IRB	LVR-IC	LDO, 4.7V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I7	fp	BL8555-27IQ	LVR-IC	LDO, 2.7V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I7	fp	BL8555-27IRA	LVR-IC	LDO, 2.7V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I7	fp	BL8555-27IRB	LVR-IC	LDO, 2.7V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I7	fp	LR8555-27IQ	LVR-IC	LDO, 2.7V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I7	fp	LR8555-27IRA	LVR-IC	LDO, 2.7V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I7	fp	LR8555-27IRB	LVR-IC	LDO, 2.7V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I8	-	BL8555-18IQ	LVR-IC	LDO, 1.8V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I8	-	BL8555-18IRA	LVR-IC	LDO, 1.8V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
I8	-	BL8555-18IRB	LVR-IC	LDO, 1.8V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I8	-	LR8555-18IQ	LVR-IC	LDO, 1.8V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I8	-	LR8555-18IRA	LVR-IC	LDO, 1.8V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I8	-	LR8555-18IRB	LVR-IC	LDO, 1.8V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I8	-	RT9167-23CBR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
I8	ea	BL8555-18UQ	LVR-IC	LDO, 1.8V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I8	ea	BL8555-18URA	LVR-IC	LDO, 1.8V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I8	ea	BL8555-18URB	LVR-IC	LDO, 1.8V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I8	ea	LR8555-18UQ	LVR-IC	LDO, 1.8V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I8	ea	LR8555-18URA	LVR-IC	LDO, 1.8V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I8	ea	LR8555-18URB	LVR-IC	LDO, 1.8V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I8	eu	BL8555-28UQ	LVR-IC	LDO, 2.8V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I8	eu	BL8555-28URA	LVR-IC	LDO, 2.8V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I8	eu	BL8555-28URB	LVR-IC	LDO, 2.8V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I8	eu	LR8555-28UQ	LVR-IC	LDO, 2.8V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I8	eu	LR8555-28URA	LVR-IC	LDO, 2.8V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I8	eu	LR8555-28URB	LVR-IC	LDO, 2.8V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I8	fg	BL8555-38UQ	LVR-IC	LDO, 3.8V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I8	fg	BL8555-38URA	LVR-IC	LDO, 3.8V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I8	fg	BL8555-38URB	LVR-IC	LDO, 3.8V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I8	fg	LR8555-38UQ	LVR-IC	LDO, 3.8V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I8	fg	LR8555-38URA	LVR-IC	LDO, 3.8V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I8	fg	LR8555-38URB	LVR-IC	LDO, 3.8V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I8	fh	BL8555-48UQ	LVR-IC	LDO, 4.8V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I8	fh	BL8555-48URA	LVR-IC	LDO, 4.8V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I8	fh	BL8555-48URB	LVR-IC	LDO, 4.8V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I8	fh	LR8555-48UQ	LVR-IC	LDO, 4.8V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I8	fh	LR8555-48URA	LVR-IC	LDO, 4.8V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I8	fh	LR8555-48URB	LVR-IC	LDO, 4.8V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I8	fk	BL8555-38IQ	LVR-IC	LDO, 3.8V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I8	fk	BL8555-38IRA	LVR-IC	LDO, 3.8V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I8	fk	BL8555-38IRB	LVR-IC	LDO, 3.8V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I8	fk	LR8555-38IQ	LVR-IC	LDO, 3.8V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I8	fk	LR8555-38IRA	LVR-IC	LDO, 3.8V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I8	fk	LR8555-38IRB	LVR-IC	LDO, 3.8V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I8	fm	BL8555-48IQ	LVR-IC	LDO, 4.8V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I8	fm	BL8555-48IRA	LVR-IC	LDO, 4.8V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I8	fm	BL8555-48IRB	LVR-IC	LDO, 4.8V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I8	fm	LR8555-48IQ	LVR-IC	LDO, 4.8V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I8	fm	LR8555-48IRA	LVR-IC	LDO, 4.8V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I8	fm	LR8555-48IRB	LVR-IC	LDO, 4.8V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I8	fp	BL8555-28IQ	LVR-IC	LDO, 2.8V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I8	fp	BL8555-28IRA	LVR-IC	LDO, 2.8V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I8	fp	BL8555-28IRB	LVR-IC	LDO, 2.8V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I8	fp	LR8555-28IQ	LVR-IC	LDO, 2.8V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I8	fp	LR8555-28IRA	LVR-IC	LDO, 2.8V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I8	fp	LR8555-28IRB	LVR-IC	LDO, 2.8V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I9	-	BL8555-19IQ	LVR-IC	LDO, 1.9V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I9	-	BL8555-19IRA	LVR-IC	LDO, 1.9V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I9	-	BL8555-19IRB	LVR-IC	LDO, 1.9V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I9	-	LR8555-19IQ	LVR-IC	LDO, 1.9V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I9	-	LR8555-19IRA	LVR-IC	LDO, 1.9V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I9	-	LR8555-19IRB	LVR-IC	LDO, 1.9V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I9	-	RT9167-24CBR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
I9	ea	BL8555-19UQ	LVR-IC	LDO, 1.9V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I9	ea	BL8555-19URA	LVR-IC	LDO, 1.9V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I9	ea	BL8555-19URB	LVR-IC	LDO, 1.9V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I9	ea	LR8555-19UQ	LVR-IC	LDO, 1.9V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I9	ea	LR8555-19URA	LVR-IC	LDO, 1.9V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I9	ea	LR8555-19URB	LVR-IC	LDO, 1.9V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I9	eu	BL8555-29UQ	LVR-IC	LDO, 2.9V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I9	eu	BL8555-29URA	LVR-IC	LDO, 2.9V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I9	eu	BL8555-29URB	LVR-IC	LDO, 2.9V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I9	eu	LR8555-29UQ	LVR-IC	LDO, 2.9V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I9	eu	LR8555-29URA	LVR-IC	LDO, 2.9V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I9	eu	LR8555-29URB	LVR-IC	LDO, 2.9V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I9	fg	BL8555-39UQ	LVR-IC	LDO, 3.9V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I9	fg	BL8555-39URA	LVR-IC	LDO, 3.9V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I9	fg	BL8555-39URB	LVR-IC	LDO, 3.9V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I9	fg	LR8555-39UQ	LVR-IC	LDO, 3.9V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
I9	fg	LR8555-39URA	LVR-IC	LDO, 3.9V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I9	fg	LR8555-39URB	LVR-IC	LDO, 3.9V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I9	fh	BL8555-49UQ	LVR-IC	LDO, 4.9V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Shb
I9	fh	BL8555-49URA	LVR-IC	LDO, 4.9V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Shb
I9	fh	BL8555-49URB	LVR-IC	LDO, 4.9V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Shb
I9	fh	LR8555-49UQ	LVR-IC	LDO, 4.9V±2%, 450mA	SC-70-5	28ym	VR1	6kd	Lrc
I9	fh	LR8555-49URA	LVR-IC	LDO, 4.9V±2%, 450mA	SOT-23-5	28ym	VR1	6kd	Lrc
I9	fh	LR8555-49URB	LVR-IC	LDO, 4.9V±2%, 450mA	SOT-23-5	28c5	VR1	6kc	Lrc
I9	fk	BL8555-39IQ	LVR-IC	LDO, 3.9V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I9	fk	BL8555-39IRA	LVR-IC	LDO, 3.9V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I9	fk	BL8555-39IRB	LVR-IC	LDO, 3.9V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I9	fk	LR8555-39IQ	LVR-IC	LDO, 3.9V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I9	fk	LR8555-39IRA	LVR-IC	LDO, 3.9V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I9	fk	LR8555-39IRB	LVR-IC	LDO, 3.9V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I9	fm	BL8555-49IQ	LVR-IC	LDO, 4.9V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I9	fm	BL8555-49IRA	LVR-IC	LDO, 4.9V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I9	fm	BL8555-49IRB	LVR-IC	LDO, 4.9V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I9	fm	LR8555-49IQ	LVR-IC	LDO, 4.9V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I9	fm	LR8555-49IRA	LVR-IC	LDO, 4.9V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I9	fm	LR8555-49IRB	LVR-IC	LDO, 4.9V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
I9	fp	BL8555-29IQ	LVR-IC	LDO, 2.9V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
I9	fp	BL8555-29IRA	LVR-IC	LDO, 2.9V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
I9	fp	BL8555-29IRB	LVR-IC	LDO, 2.9V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
I9	fp	LR8555-29IQ	LVR-IC	LDO, 2.9V±2%, 450mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
I9	fp	LR8555-29IRA	LVR-IC	LDO, 2.9V±2%, 450mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
I9	fp	LR8555-29IRB	LVR-IC	LDO, 2.9V±2%, 450mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
IA	-	RT9167-25CBR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
IB	-	RT9167-26CBR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
IC	-	RT9167-27CBR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
ID	-	RT9167-28CBR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
IE	-	RT9167-29CBR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
IF	-	RT9167-30CBR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
IG	-	RT9167-31CBR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
IH	-	RT9167-32CBR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
IJ	-	RT9167-33CBR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
IJ-	-	RT9167-33PBR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
IK	-	RT9167-34CBR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
IL	-	RT9167-35CBR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
IM	-	RT9167-36CBR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
IN	-	AAT3517IGV-2.63-C-C	Vdet-IC	2.63V±1.5%, -MR, -Reset PPO	SOT-23-5	28cp	VD17	6k	Ant
IN	-	RT9167-37CBR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
IQ	-	AAT3517IGV-2.93-C-C	Vdet-IC	2.93V±1.5%, -MR, -Reset PPO	SOT-23-5	28cp	VD17	6k	Ant
IR	-	RT9167-40CBR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
IT-	-	RT9167-42PBR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
J0	-	ELM89203B	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
J0	-	MC78PC50N	LVR-IC	LDO, LN, +CE, 5V±2.5%, 100mA	SOT-23-5	28cx	VR4	6b	Ons
J0	-	R1111N501B	LVR-IC	LDO, Low noise, 5.0V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
J0	-	RN5RG20AA	LVR-IC	Ext. transistor, 2V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
J0	-	RT9167A-15CB	LVR-IC	LDO, 1.5V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
J0	eu	BL8555-20VQ	LVR-IC	LDO, 2.0V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J0	eu	BL8555-20VRA	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J0	eu	BL8555-20VRB	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J0	eu	BL8558-20PRC	LVR-IC	LDO, 2.0V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J0	eu	BL8558-20PRN	LVR-IC	LDO, 2.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J0	eu	BL8591CB5TR20	LVR-IC	LDO, 2.0V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J0	eu	LR8555-20VQ	LVR-IC	LDO, 2.0V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J0	eu	LR8555-20VRA	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J0	eu	LR8555-20VRB	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J0	eu	LR8558-20PRN	LVR-IC	LDO, 2.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J0	fg	BL8555-30VQ	LVR-IC	LDO, 3.0V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J0	fg	BL8555-30VRA	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J0	fg	BL8555-30VRB	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J0	fg	BL8558-30PRC	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J0	fg	BL8558-30PRN	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J0	fg	BL8591CB5TR30	LVR-IC	LDO, 3.0V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J0	fg	LR8555-30VQ	LVR-IC	LDO, 3.0V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J0	fg	LR8555-30VRA	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J0	fg	LR8555-30VRB	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J0	fg	LR8558-30PRN	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J0	fh	BL8555-40VQ	LVR-IC	LDO, 4.0V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J0	fh	BL8555-40VRA	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J0	fh	BL8555-40VRB	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J0	fh	BL8558-40PRC	LVR-IC	LDO, 4.0V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J0	fh	BL8558-40PRN	LVR-IC	LDO, 4.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J0	fh	BL8591CB5TR40	LVR-IC	LDO, 4.0V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J0	fh	LR8555-40VQ	LVR-IC	LDO, 4.0V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J0	fh	LR8555-40VRA	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J0	fh	LR8555-40VRB	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J0	fh	LR8558-40PRN	LVR-IC	LDO, 4.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J0	fi	BL8555-50VQ	LVR-IC	LDO, 5.0V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J0	fi	BL8555-50VRA	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J0	fi	BL8555-50VRB	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J0	fi	LR8555-50VQ	LVR-IC	LDO, 5.0V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J0	fi	LR8555-50VRA	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J0	fi	LR8555-50VRB	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J0	fk	BL8555-30JQ	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J0	fk	BL8555-30JRA	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J0	fk	BL8555-30JRB	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J0	fk	LR8555-30JQ	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J0	fk	LR8555-30JRA	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J0	fk	LR8555-30JRB	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J0	fm	BL8555-40JQ	LVR-IC	LDO, 4.0V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J0	fm	BL8555-40JRA	LVR-IC	LDO, 4.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J0	fm	BL8555-40JRB	LVR-IC	LDO, 4.0V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J0	fm	LR8555-40JQ	LVR-IC	LDO, 4.0V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J0	fm	LR8555-40JRA	LVR-IC	LDO, 4.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J0	fm	LR8555-40JRB	LVR-IC	LDO, 4.0V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J0	fn	BL8555-50JQ	LVR-IC	LDO, 5.0V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J0	fn	BL8555-50JRA	LVR-IC	LDO, 5.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J0	fn	BL8555-50JRB	LVR-IC	LDO, 5.0V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J0	fn	LR8555-50JQ	LVR-IC	LDO, 5.0V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J0	fn	LR8555-50JRA	LVR-IC	LDO, 5.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J0	fn	LR8555-50JRB	LVR-IC	LDO, 5.0V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J0	fp	BL8555-20JQ	LVR-IC	LDO, 2.0V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J0	fp	BL8555-20JRA	LVR-IC	LDO, 2.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J0	fp	BL8555-20JRB	LVR-IC	LDO, 2.0V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J0	fp	LR8555-20JQ	LVR-IC	LDO, 2.0V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J0	fp	LR8555-20JRA	LVR-IC	LDO, 2.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J0	fp	LR8555-20JRB	LVR-IC	LDO, 2.0V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J0-	-	RT9167A-15PB	LVR-IC	LDO, 1.5V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
J00	-	R1154N100B	LVR-IC	LDO, 10V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J001	-	RP113Q122B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J002	-	RP113Q132B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J003	-	RP113Q152B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J004	-	RP113Q182B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J005	-	RP113Q182B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J006	-	RP113Q192B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J007	-	RP113Q202B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J008	-	RP113Q212B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J009	-	RP113Q232B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J01	-	R1154N101B	LVR-IC	LDO, 10.1V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J010	-	RP113Q252B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J011	-	RP113Q262B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J012	-	RP113Q272B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J013	-	RP113Q282B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J014	-	RP113Q282B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J015	-	RP113Q292B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J016	-	RP113Q302B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J017	-	RP113Q312B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J018	-	RP113Q322B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J019	-	RP113Q332B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SC-88A	28cx	VR4	6ma	Ric
J02	-	R1154N102B	LVR-IC	LDO, 10.2V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J03	-	R1154N103B	LVR-IC	LDO, 10.3V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J04	-	R1154N104B	LVR-IC	LDO, 10.4V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J05	-	R1154N105B	LVR-IC	LDO, 10.5V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J06	-	R1154N106B	LVR-IC	LDO, 10.6V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J07	-	R1154N107B	LVR-IC	LDO, 10.7V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J07	-	RP111N071D	LVR-IC	LDO, 0.7V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J08	-	R1154N108B	LVR-IC	LDO, 10.8V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J08	-	RP111N081D	LVR-IC	LDO, 0.8V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J09	-	R1154N109B	LVR-IC	LDO, 10.9V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J09	-	RP111N091D	LVR-IC	LDO, 0.9V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J0A	-	RP130N341A	LVR-IC	LDO, LN, -CE, 3.4V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J0B	-	RP130N351A	LVR-IC	LDO, LN, -CE, 3.5V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J0C	-	RP130N361A	LVR-IC	LDO, LN, -CE, 3.6V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J0D	-	RP130N371A	LVR-IC	LDO, LN, -CE, 3.7V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J0E	-	RP130N381A	LVR-IC	LDO, LN, -CE, 3.8V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J0F	-	RP130N391A	LVR-IC	LDO, LN, -CE, 3.9V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J0G	-	RP130N401A	LVR-IC	LDO, LN, -CE, 4V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J0H	-	RP130N411A	LVR-IC	LDO, LN, -CE, 4.1V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J0J	-	RP130N421A	LVR-IC	LDO, LN, -CE, 4.2V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J0K	-	RP130N431A	LVR-IC	LDO, LN, -CE, 4.3V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J0L	-	RP130N441A	LVR-IC	LDO, LN, -CE, 4.4V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J0M	-	RP130N451A	LVR-IC	LDO, LN, -CE, 4.5V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J0N	-	RP130N461A	LVR-IC	LDO, LN, -CE, 4.6V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J0P	-	RP130N471A	LVR-IC	LDO, LN, -CE, 4.7V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J0Q	-	RP130N481A	LVR-IC	LDO, LN, -CE, 4.8V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J0R	-	RP130N491A	LVR-IC	LDO, LN, -CE, 4.9V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J0S	-	RP130N501A	LVR-IC	LDO, LN, -CE, 5V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1	-	ELM89213B	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
J1	-	RN5RG21AA	LVR-IC	Ext. transistor, 2.1V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
J1	-	RT9167A-16CB	LVR-IC	LDO, 1.6V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
J1	-	TC7SZ00F	CMOS-Log	2-input NAND gate	SSOP-5	28	Log1	6a	Tos
J1	-	TC7SZ00FU	CMOS-Log	2-input NAND gate	SC-70-5	28	Log1	6a	Tos
J1	eu	BL8555-21VQ	LVR-IC	LDO, 2.1V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J1	eu	BL8555-21VRA	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J1	eu	BL8555-21VRB	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J1	eu	BL8558-21PRC	LVR-IC	LDO, 2.1V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J1	eu	BL8558-21PRN	LVR-IC	LDO, 2.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J1	eu	BL8591CB5TR21	LVR-IC	LDO, 2.1V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J1	eu	LR8555-21VQ	LVR-IC	LDO, 2.1V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J1	eu	LR8555-21VRA	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J1	eu	LR8555-21VRB	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J1	eu	LR8558-21PRN	LVR-IC	LDO, 2.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J1	fg	BL8555-31VQ	LVR-IC	LDO, 3.1V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J1	fg	BL8555-31VRA	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J1	fg	BL8555-31VRB	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J1	fg	BL8558-31PRC	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J1	fg	BL8558-31PRN	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J1	fg	BL8591CB5TR31	LVR-IC	LDO, 3.1V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J1	fg	LR8555-31VQ	LVR-IC	LDO, 3.1V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J1	fg	LR8555-31VRA	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J1	fg	LR8555-31VRB	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J1	fg	LR8558-31PRN	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J1	fh	BL8555-41VQ	LVR-IC	LDO, 4.1V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J1	fh	BL8555-41VRA	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J1	fh	BL8555-41VRB	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J1	fh	BL8558-41PRC	LVR-IC	LDO, 4.1V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J1	fh	BL8558-41PRN	LVR-IC	LDO, 4.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J1	fh	BL8591CB5TR41	LVR-IC	LDO, 4.1V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J1	fh	LR8555-41VQ	LVR-IC	LDO, 4.1V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J1	fh	LR8555-41VRA	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J1	fh	LR8555-41VRB	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J1	fh	LR8558-41PRN	LVR-IC	LDO, 4.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J1	fk	BL8555-31JQ	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J1	fk	BL8555-31JRA	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J1	fk	BL8555-31JRB	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J1	fk	LR8555-31JQ	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J1	fk	LR8555-31JRA	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J1	fk	LR8555-31JRB	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J1	fm	BL8555-41JQ	LVR-IC	LDO, 4.1V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J1	fm	BL8555-41JRA	LVR-IC	LDO, 4.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J1	fm	BL8555-41JRB	LVR-IC	LDO, 4.1V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J1	fm	LR8555-41JQ	LVR-IC	LDO, 4.1V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J1	fm	LR8555-41JRA	LVR-IC	LDO, 4.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J1	fm	LR8555-41JRB	LVR-IC	LDO, 4.1V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J1	fp	BL8555-21JQ	LVR-IC	LDO, 2.1V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J1	fp	BL8555-21JRA	LVR-IC	LDO, 2.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J1	fp	BL8555-21JRB	LVR-IC	LDO, 2.1V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J1	fp	LR8555-21JQ	LVR-IC	LDO, 2.1V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J1	fp	LR8555-21JRA	LVR-IC	LDO, 2.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J1	fp	LR8555-21JRB	LVR-IC	LDO, 2.1V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J10	-	R1154N110B	LVR-IC	LDO, 11V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J10	-	RP111N101D	LVR-IC	LDO, 1.0V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J11	-	R1154N111B	LVR-IC	LDO, 11.1V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J11	-	RP111N111D	LVR-IC	LDO, 1.1V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J12	-	R1154N112B	LVR-IC	LDO, 11.2V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J12	-	RP111N121D	LVR-IC	LDO, 1.2V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J13	-	R1154N113B	LVR-IC	LDO, 11.3V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J13	-	RP111N131D	LVR-IC	LDO, 1.3V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J14	-	R1154N114B	LVR-IC	LDO, 11.4V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J14	-	RP111N141D	LVR-IC	LDO, 1.4V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J15	-	R1154N115B	LVR-IC	LDO, 11.5V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J15	-	RP111N151D	LVR-IC	LDO, 1.5V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J15	-	TK71215M	LVR-IC	LDO, 1.5V±1%, 160mA	SOT-23-5	28y3	VR24	6a	Tok
J16	-	R1154N116B	LVR-IC	LDO, 11.6V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J16	-	RP111N161D	LVR-IC	LDO, 1.6V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J17	-	R1154N117B	LVR-IC	LDO, 11.7V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J17	-	RP111N171D	LVR-IC	LDO, 1.7V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J18	-	R1154N118B	LVR-IC	LDO, 11.8V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J18	-	RP111N181D	LVR-IC	LDO, 1.8V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J19	-	R1154N119B	LVR-IC	LDO, 11.9V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J19	-	RP111N191D	LVR-IC	LDO, 1.9V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J1A	-	RP130N341B	LVR-IC	LDO, LN, +CE, 3.4V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1B	-	RP130N351B	LVR-IC	LDO, LN, +CE, 3.5V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1C	-	RP130N361B	LVR-IC	LDO, LN, +CE, 3.6V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1D	-	RP130N371B	LVR-IC	LDO, LN, +CE, 3.7V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1E	-	RP130N381B	LVR-IC	LDO, LN, +CE, 3.8V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1F	-	RP130N391B	LVR-IC	LDO, LN, +CE, 3.9V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1G	-	RP130N401B	LVR-IC	LDO, LN, +CE, 4V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1H	-	RP130N411B	LVR-IC	LDO, LN, +CE, 4.1V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1J	-	RP130N421B	LVR-IC	LDO, LN, +CE, 4.2V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1K	-	RP130N431B	LVR-IC	LDO, LN, +CE, 4.3V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1L	-	RP130N441B	LVR-IC	LDO, LN, +CE, 4.4V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1M	-	RP130N451B	LVR-IC	LDO, LN, +CE, 4.5V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1N	-	RP130N461B	LVR-IC	LDO, LN, +CE, 4.6V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1P	-	RP130N471B	LVR-IC	LDO, LN, +CE, 4.7V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1Q	-	RP130N481B	LVR-IC	LDO, LN, +CE, 4.8V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1R	-	RP130N491B	LVR-IC	LDO, LN, +CE, 4.9V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J1S	-	RP130N501B	LVR-IC	LDO, LN, +CE, +CE, 5V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J2	-	BL8555-12JQ	LVR-IC	LDO, 1.2V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J2	-	BL8555-12JRA	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J2	-	BL8555-12JRB	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J2	-	BL8558-12PRC	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J2	-	BL8558-12PRN	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J2	-	BL8591CB5TR12	LVR-IC	LDO, 1.2V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J2	-	ELM89223B	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
J2	-	LR8555-12JQ	LVR-IC	LDO, 1.2V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J2	-	LR8555-12JRA	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J2	-	LR8555-12JRB	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J2	-	LR8558-12PRN	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J2	-	RN5RG22AA	LVR-IC	Ext. transistor, 2.2V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
J2	-	RT9167A-17CB	LVR-IC	LDO, 1.7V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
J2	-	TC7SZ08F	CMOS-Log	2-input AND gate	SSOP-5	28	Log3	6a	Tos
J2	-	TC7SZ08FU	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6a	Tos
J2	ea	BL8555-12VQ	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J2	ea	BL8555-12VRA	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J2	ea	BL8555-12VRB	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J2	ea	LR8555-12VQ	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J2	ea	LR8555-12VRA	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J2	ea	LR8555-12VRB	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J2	eu	BL8555-22VQ	LVR-IC	LDO, 2.2V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J2	eu	BL8555-22VRA	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J2	eu	BL8555-22VRB	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J2	eu	BL8558-22PRC	LVR-IC	LDO, 2.2V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J2	eu	BL8558-22PRN	LVR-IC	LDO, 2.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J2	eu	BL8591CB5TR22	LVR-IC	LDO, 2.2V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J2	eu	LR8555-22VQ	LVR-IC	LDO, 2.2V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J2	eu	LR8555-22VRA	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J2	eu	LR8555-22VRB	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J2	eu	LR8558-22PRN	LVR-IC	LDO, 2.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J2	fg	BL8555-32VQ	LVR-IC	LDO, 3.2V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J2	fg	BL8555-32VRA	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J2	fg	BL8555-32VRB	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J2	fg	BL8558-32PRC	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J2	fg	BL8558-32PRN	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J2	fg	BL8591CB5TR32	LVR-IC	LDO, 3.2V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J2	fg	LR8555-32VQ	LVR-IC	LDO, 3.2V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J2	fg	LR8555-32VRA	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J2	fg	LR8555-32VRB	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J2	fg	LR8558-32PRN	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J2	fh	BL8555-42VQ	LVR-IC	LDO, 4.2V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J2	fh	BL8555-42VRA	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J2	fh	BL8555-42VRB	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J2	fh	BL8558-42PRC	LVR-IC	LDO, 4.2V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J2	fh	BL8558-42PRN	LVR-IC	LDO, 4.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J2	fh	BL8591CB5TR42	LVR-IC	LDO, 4.2V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J2	fh	LR8555-42VQ	LVR-IC	LDO, 4.2V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J2	fh	LR8555-42VRA	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J2	fh	LR8555-42VRB	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J2	fh	LR8558-42PRN	LVR-IC	LDO, 4.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J2	fk	BL8555-32JQ	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J2	fk	BL8555-32JRA	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J2	fk	BL8555-32JRB	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J2	fk	LR8555-32JQ	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J2	fk	LR8555-32JRA	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J2	fk	LR8555-32JRB	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J2	fm	BL8555-42JQ	LVR-IC	LDO, 4.2V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J2	fm	BL8555-42JRA	LVR-IC	LDO, 4.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J2	fm	BL8555-42JRB	LVR-IC	LDO, 4.2V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J2	fm	LR8555-42JQ	LVR-IC	LDO, 4.2V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J2	fm	LR8555-42JRA	LVR-IC	LDO, 4.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J2	fm	LR8555-42JRB	LVR-IC	LDO, 4.2V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J2	fp	BL8555-22JQ	LVR-IC	LDO, 2.2V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J2	fp	BL8555-22JRA	LVR-IC	LDO, 2.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J2	fp	BL8555-22JRB	LVR-IC	LDO, 2.2V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J2	fp	LR8555-22JQ	LVR-IC	LDO, 2.2V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J2	fp	LR8555-22JRA	LVR-IC	LDO, 2.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J2	fp	LR8555-22JRB	LVR-IC	LDO, 2.2V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J20	-	R1154N120B	LVR-IC	LDO, 12V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J20	-	RP111N201D	LVR-IC	LDO, 2.0V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J20	-	TK71220M	LVR-IC	LDO, 2.0V±1%, 160mA	SOT-23-5	28y3	VR24	6a	Tok
J21	-	RP111N211D	LVR-IC	LDO, 2.1V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J22	-	RP111N221D	LVR-IC	LDO, 2.2V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J23	-	RP111N231D	LVR-IC	LDO, 2.3V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J24	-	R1154N001C	LVR-IC	LDO, Adjustable, 150mA, +CE	SOT-23-5	28vrg	VR16	6g	Ric
J24	-	RP111N241D	LVR-IC	LDO, 2.4V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J25	-	R1154N025B	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J25	-	RP111N251D	LVR-IC	LDO, 2.5V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J25	-	TK71225M	LVR-IC	LDO, 2.5V±1%, 160mA	SOT-23-5	28y3	VR24	6a	Tok
J26	-	R1154N026B	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J26	-	RP111N261D	LVR-IC	LDO, 2.6V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J27	-	R1154N027B	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J27	-	RP111N271D	LVR-IC	LDO, 2.7V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J27	-	TK71227M	LVR-IC	LDO, 2.7V±1%, 160mA	SOT-23-5	28y3	VR24	6a	Tok
J28	-	R1154N028B	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J28	-	RP111N281D	LVR-IC	LDO, 2.8V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J29	-	R1154N029B	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J29	-	RP111N291D	LVR-IC	LDO, 2.9V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J2A	-	RP130N341D	LVR-IC	LDO, LN, +CE, CL, 3.4V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J2B	-	RP130N351D	LVR-IC	LDO, LN, +CE, CL, 3.5V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J2C	-	RP130N361D	LVR-IC	LDO, LN, +CE, CL, 3.6V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J2D	-	RP130N371D	LVR-IC	LDO, LN, +CE, CL, 3.7V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J2E	-	RP130N381D	LVR-IC	LDO, LN, +CE, CL, 3.8V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J2F	-	RP130N391D	LVR-IC	LDO, LN, +CE, CL, 3.9V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J2G	-	RP130N401D	LVR-IC	LDO, LN, +CE, CL, 4V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J2H	-	RP130N411D	LVR-IC	LDO, LN, +CE, CL, 4.1V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J2J	-	RP130N421D	LVR-IC	LDO, LN, +CE, CL, 4.2V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J2K	-	RP130N431D	LVR-IC	LDO, LN, +CE, CL, 4.3V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J2L	-	RP130N441D	LVR-IC	LDO, LN, +CE, CL, 4.4V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J2M	-	RP130N451D	LVR-IC	LDO, LN, +CE, CL, 4.5V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J2N	-	RP130N461D	LVR-IC	LDO, LN, +CE, CL, 4.6V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J2P	-	RP130N471D	LVR-IC	LDO, LN, +CE, CL, 4.7V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J2Q	-	RP130N481D	LVR-IC	LDO, LN, +CE, CL, 4.8V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J2R	-	RP130N491D	LVR-IC	LDO, LN, +CE, CL, 4.9V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J2S	-	RP130N501D	LVR-IC	LDO, LN, +CE, CL, 5V±1%, 150mA	SOT-23-5	28cx	VR4	6g	Ric
J3	-	BL8555-13JQ	LVR-IC	LDO, 1.3V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J3	-	BL8555-13JRA	LVR-IC	LDO, 1.3V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J3	-	BL8555-13JRB	LVR-IC	LDO, 1.3V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J3	-	BL8558-13PRC	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J3	-	BL8558-13PRN	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J3	-	BL8591CB5TR13	LVR-IC	LDO, 1.3V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J3	-	ELM89233B	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
J3	-	LR8555-13JQ	LVR-IC	LDO, 1.3V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J3	-	LR8555-13JRA	LVR-IC	LDO, 1.3V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J3	-	LR8555-13JRB	LVR-IC	LDO, 1.3V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J3	-	LR8558-13PRN	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J3	-	RN5RG23AA	LVR-IC	Ext. transistor, 2.3V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
J3	-	RT9167A-18CB	LVR-IC	LDO, 1.8V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
J3	-	TC7SZ02F	CMOS-Log	2-input NOR gate	SSOP-5	28	Log2	6a	Tos
J3	-	TC7SZ02FU	CMOS-Log	2-input NOR gate	SC-70-5	28	Log2	6a	Tos
J3	ea	BL8555-13VQ	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J3	ea	BL8555-13VRA	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J3	ea	BL8555-13VRB	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J3	ea	LR8555-13VQ	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J3	ea	LR8555-13VRA	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J3	ea	LR8555-13VRB	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J3	eu	BL8555-23VQ	LVR-IC	LDO, 2.3V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J3	eu	BL8555-23VRA	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J3	eu	BL8555-23VRB	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J3	eu	BL8558-23PRC	LVR-IC	LDO, 2.3V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J3	eu	BL8558-23PRN	LVR-IC	LDO, 2.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J3	eu	BL8591CB5TR23	LVR-IC	LDO, 2.3V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J3	eu	LR8555-23VQ	LVR-IC	LDO, 2.3V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J3	eu	LR8555-23VRA	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J3	eu	LR8555-23VRB	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J3	eu	LR8558-23PRN	LVR-IC	LDO, 2.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J3	fg	BL8555-33VQ	LVR-IC	LDO, 3.3V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J3	fg	BL8555-33VRA	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J3	fg	BL8555-33VRB	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J3	fg	BL8558-33PRC	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J3	fg	BL8558-33PRN	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J3	fg	BL8591CB5TR33	LVR-IC	LDO, 3.3V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J3	fg	LR8555-33VQ	LVR-IC	LDO, 3.3V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J3	fg	LR8555-33VRA	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J3	fg	LR8555-33VRB	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J3	fg	LR8558-33PRN	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J3	fh	BL8555-43VQ	LVR-IC	LDO, 4.3V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J3	fh	BL8555-43VRA	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J3	fh	BL8555-43VRB	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J3	fh	BL8558-43PRC	LVR-IC	LDO, 4.3V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J3	fh	BL8558-43PRN	LVR-IC	LDO, 4.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J3	fh	BL8591CB5TR43	LVR-IC	LDO, 4.3V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J3	fh	LR8555-43VQ	LVR-IC	LDO, 4.3V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J3	fh	LR8555-43VRA	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J3	fh	LR8555-43VRB	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J3	fh	LR8558-43PRN	LVR-IC	LDO, 4.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J3	fk	BL8555-33JQ	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J3	fk	BL8555-33JRA	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J3	fk	BL8555-33JRB	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J3	fk	LR8555-33JQ	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J3	fk	LR8555-33JRA	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J3	fk	LR8555-33JRB	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J3	fm	BL8555-43JQ	LVR-IC	LDO, 4.3V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J3	fm	BL8555-43JRA	LVR-IC	LDO, 4.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J3	fm	BL8555-43JRB	LVR-IC	LDO, 4.3V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J3	fm	LR8555-43JQ	LVR-IC	LDO, 4.3V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J3	fm	LR8555-43JRA	LVR-IC	LDO, 4.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J3	fm	LR8555-43JRB	LVR-IC	LDO, 4.3V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J3	fp	BL8555-23JQ	LVR-IC	LDO, 2.3V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J3	fp	BL8555-23JRA	LVR-IC	LDO, 2.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J3	fp	BL8555-23JRB	LVR-IC	LDO, 2.3V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J3	fp	LR8555-23JQ	LVR-IC	LDO, 2.3V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J3	fp	LR8555-23JRA	LVR-IC	LDO, 2.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J3	fp	LR8555-23JRB	LVR-IC	LDO, 2.3V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J3-	-	RT9167A-18PB	LVR-IC	LDO, 1.8V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
J3=	-	RT9167A-18GB	LVR-IC	LDO, 1.8V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
J30	-	R1154N030B	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J30	-	RP111N301D	LVR-IC	LDO, 3.0V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J30	-	TK71230M	LVR-IC	LDO, 3.0V±1%, 160mA	SOT-23-5	28y3	VR24	6a	Tok
J31	-	R1154N031B	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J31	-	RP111N311D	LVR-IC	LDO, 3.1V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J32	-	R1154N032B	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J32	-	RP111N321D	LVR-IC	LDO, 3.2V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J33	-	R1154N033B	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J33	-	RP111N331D	LVR-IC	LDO, 3.3V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J34	-	R1154N034B	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J34	-	RP111N341D	LVR-IC	LDO, 3.4V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J35	-	R1154N035B	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J35	-	RP111N351D	LVR-IC	LDO, 3.5V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J35	-	TK71235M	LVR-IC	LDO, 3.5V±1%, 160mA	SOT-23-5	28y3	VR24	6a	Tok
J36	-	OPA336NJ	Op-IC	Single-supply, CMOS, 2.3..5.5V, 115dB	SOT-23-5	28opa	OP1	6a	Bb
J36	-	R1154N036B	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J36	-	RP111N361D	LVR-IC	LDO, 3.6V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J37	-	R1154N037B	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J37	-	RP111N071D5	LVR-IC	LDO, 0.75V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J38	-	R1154N038B	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J38	-	RP111N121D5	LVR-IC	LDO, 1.25V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J39	-	R1154N039B	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J39	-	RP111N181D5	LVR-IC	LDO, 1.85V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J4	-	BL8555-14JQ	LVR-IC	LDO, 1.4V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J4	-	BL8555-14JRA	LVR-IC	LDO, 1.4V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J4	-	BL8555-14JRB	LVR-IC	LDO, 1.4V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J4	-	BL8558-14PRC	LVR-IC	LDO, 1.4V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J4	-	BL8558-14PRN	LVR-IC	LDO, 1.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J4	-	BL8591CB5TR14	LVR-IC	LDO, 1.4V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J4	-	ELM89243B	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
J4	-	LR8555-14JQ	LVR-IC	LDO, 1.4V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J4	-	LR8555-14JRA	LVR-IC	LDO, 1.4V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J4	-	LR8555-14JRB	LVR-IC	LDO, 1.4V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J4	-	LR8558-14PRN	LVR-IC	LDO, 1.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J4	-	RN5RG24AA	LVR-IC	Ext. transistor, 2.4V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
J4	-	RT9167A-19CB	LVR-IC	LDO, 1.9V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
J4	-	TC7SZ32F	CMOS-Log	2-input OR gate	SSOP-5	28	Log4	6a	Tos
J4	-	TC7SZ32FU	CMOS-Log	2-input OR gate	SC-70-5	28	Log4	6a	Tos
J4	ea	BL8555-14VQ	LVR-IC	LDO, 1.4V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J4	ea	BL8555-14VRA	LVR-IC	LDO, 1.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J4	ea	BL8555-14VRB	LVR-IC	LDO, 1.4V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J4	ea	LR8555-14VQ	LVR-IC	LDO, 1.4V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J4	ea	LR8555-14VRA	LVR-IC	LDO, 1.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J4	ea	LR8555-14VRB	LVR-IC	LDO, 1.4V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J4	eu	BL8555-24VQ	LVR-IC	LDO, 2.4V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J4	eu	BL8555-24VRA	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J4	eu	BL8555-24VRB	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J4	eu	BL8558-24PRC	LVR-IC	LDO, 2.4V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J4	eu	BL8558-24PRN	LVR-IC	LDO, 2.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J4	eu	BL8591CB5TR24	LVR-IC	LDO, 2.4V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J4	eu	LR8555-24VQ	LVR-IC	LDO, 2.4V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J4	eu	LR8555-24VRA	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J4	eu	LR8555-24VRB	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J4	eu	LR8558-24PRN	LVR-IC	LDO, 2.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J4	fg	BL8555-34VQ	LVR-IC	LDO, 3.4V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J4	fg	BL8555-34VRA	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J4	fg	BL8555-34VRB	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J4	fg	BL8558-34PRC	LVR-IC	LDO, 3.4V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J4	fg	BL8558-34PRN	LVR-IC	LDO, 3.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J4	fg	BL8591CB5TR34	LVR-IC	LDO, 3.4V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J4	fg	LR8555-34VQ	LVR-IC	LDO, 3.4V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J4	fg	LR8555-34VRA	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J4	fg	LR8555-34VRB	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J4	fg	LR8558-34PRN	LVR-IC	LDO, 3.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J4	fh	BL8555-44VQ	LVR-IC	LDO, 4.4V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J4	fh	BL8555-44VRA	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J4	fh	BL8555-44VRB	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J4	fh	BL8558-44PRC	LVR-IC	LDO, 4.4V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J4	fh	BL8558-44PRN	LVR-IC	LDO, 4.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J4	fh	BL8591CB5TR44	LVR-IC	LDO, 4.4V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J4	fh	LR8555-44VQ	LVR-IC	LDO, 4.4V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J4	fh	LR8555-44VRA	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J4	fh	LR8555-44VRB	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J4	fh	LR8558-44PRN	LVR-IC	LDO, 4.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J4	fk	BL8555-34JQ	LVR-IC	LDO, 3.4V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J4	fk	BL8555-34JRB	LVR-IC	LDO, 3.4V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J4	fk	BL8555-34PJA	LVR-IC	LDO, 3.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J4	fk	LR8555-34JQ	LVR-IC	LDO, 3.4V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J4	fk	LR8555-34JRB	LVR-IC	LDO, 3.4V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J4	fk	LR8555-34PJA	LVR-IC	LDO, 3.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J4	fm	BL8555-44JQ	LVR-IC	LDO, 4.4V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J4	fm	BL8555-44JRA	LVR-IC	LDO, 4.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J4	fm	BL8555-44JRB	LVR-IC	LDO, 4.4V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J4	fm	LR8555-44JQ	LVR-IC	LDO, 4.4V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J4	fm	LR8555-44JRA	LVR-IC	LDO, 4.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J4	fm	LR8555-44JRB	LVR-IC	LDO, 4.4V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J4	fp	BL8555-24JQ	LVR-IC	LDO, 2.4V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J4	fp	BL8555-24JRA	LVR-IC	LDO, 2.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J4	fp	BL8555-24JRB	LVR-IC	LDO, 2.4V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J4	fp	LR8555-24JQ	LVR-IC	LDO, 2.4V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J4	fp	LR8555-24JRA	LVR-IC	LDO, 2.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J4	fp	LR8555-24JRB	LVR-IC	LDO, 2.4V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J40	-	R1154N040B	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J40	-	RP111N281D5	LVR-IC	LDO, 2.85V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J40	-	TK71240M	LVR-IC	LDO, 4.0V±1%, 160mA	SOT-23-5	28y3	VR24	6a	Tok
J41	-	R1154N041B	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J41	-	RP111N101D5	LVR-IC	LDO, 1.05V±0.8%, 500mA, +CE, CL	SOT-23-5	28s0	VR6a	6g	Ric
J42	-	R1154N042B	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J43	-	R1154N043B	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J44	-	R1154N044B	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J45	-	R1154N045B	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J45	-	TK71245M	LVR-IC	LDO, 4.5V±1%, 160mA	SOT-23-5	28y3	VR24	6a	Tok
J46	-	R1154N046B	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J47	-	R1154N047B	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J47	-	TK71247M	LVR-IC	LDO, 4.7V±1%, 160mA	SOT-23-5	28y3	VR24	6a	Tok
J48	-	R1154N048B	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J49	-	R1154N049B	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J5	-	BL8555-15JQ	LVR-IC	LDO, 1.5V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J5	-	BL8555-15JRA	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J5	-	BL8555-15JRB	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J5	-	BL8558-15PRC	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J5	-	BL8558-15PRN	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J5	-	BL8591CB5TR15	LVR-IC	LDO, 1.5V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J5	-	ELM89253B	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
J5	-	LR8555-15JQ	LVR-IC	LDO, 1.5V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J5	-	LR8555-15JRA	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J5	-	LR8555-15JRB	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J5	-	LR8558-15PRN	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J5	-	RN5RG25AA	LVR-IC	Ext. transistor, 2.5V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
J5	-	RT9167A-20CB	LVR-IC	LDO, 2.0V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
J5	-	TC7SZ04F	CMOS-Log	Inverter	SSOP-5	28	Log6	6a	Tos
J5	-	TC7SZ04FU	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	Tos
J5	ea	BL8555-15VQ	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J5	ea	BL8555-15VRA	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J5	ea	BL8555-15VRB	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J5	ea	LR8555-15VQ	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J5	ea	LR8555-15VRA	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J5	ea	LR8555-15VRB	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J5	eu	BL8555-25VQ	LVR-IC	LDO, 2.5V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J5	eu	BL8555-25VRA	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J5	eu	BL8555-25VRB	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J5	eu	BL8558-25PRC	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J5	eu	BL8558-25PRN	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J5	eu	BL8591CB5TR25	LVR-IC	LDO, 2.5V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J5	eu	LR8555-25VQ	LVR-IC	LDO, 2.5V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J5	eu	LR8555-25VRA	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J5	eu	LR8555-25VRB	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J5	eu	LR8558-25PRN	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J5	fg	BL8555-35VQ	LVR-IC	LDO, 3.5V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J5	fg	BL8555-35VRA	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J5	fg	BL8555-35VRB	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J5	fg	BL8558-35PRC	LVR-IC	LDO, 3.5V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J5	fg	BL8558-35PRN	LVR-IC	LDO, 3.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J5	fg	BL8591CB5TR35	LVR-IC	LDO, 3.5V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J5	fg	LR8555-35VQ	LVR-IC	LDO, 3.5V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J5	fg	LR8555-35VRA	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J5	fg	LR8555-35VRB	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J5	fg	LR8558-35PRN	LVR-IC	LDO, 3.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J5	fh	BL8555-45VQ	LVR-IC	LDO, 4.5V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J5	fh	BL8555-45VRA	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J5	fh	BL8555-45VRB	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J5	fh	BL8558-45PRC	LVR-IC	LDO, 4.5V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J5	fh	BL8558-45PRN	LVR-IC	LDO, 4.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J5	fh	BL8591CB5TR45	LVR-IC	LDO, 4.5V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J5	fh	LR8555-45VQ	LVR-IC	LDO, 4.5V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J5	fh	LR8555-45VRA	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J5	fh	LR8555-45VRB	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J5	fh	LR8558-45PRN	LVR-IC	LDO, 4.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J5	fk	BL8555-35JQ	LVR-IC	LDO, 3.5V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J5	fk	BL8555-35JRA	LVR-IC	LDO, 3.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J5	fk	BL8555-35JRB	LVR-IC	LDO, 3.5V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J5	fk	LR8555-35JQ	LVR-IC	LDO, 3.5V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J5	fk	LR8555-35JRA	LVR-IC	LDO, 3.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J5	fk	LR8555-35JRB	LVR-IC	LDO, 3.5V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J5	fm	BL8555-45JQ	LVR-IC	LDO, 4.5V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J5	fm	BL8555-45JRA	LVR-IC	LDO, 4.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J5	fm	BL8555-45JRB	LVR-IC	LDO, 4.5V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J5	fm	LR8555-45JQ	LVR-IC	LDO, 4.5V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J5	fm	LR8555-45JRA	LVR-IC	LDO, 4.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J5	fm	LR8555-45JRB	LVR-IC	LDO, 4.5V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J5	fp	BL8555-25JQ	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J5	fp	BL8555-25JRA	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J5	fp	BL8555-25JRB	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J5	fp	LR8555-25JQ	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J5	fp	LR8555-25JRA	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J5	fp	LR8555-25JRB	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J5-	-	RT9167A-20PB	LVR-IC	LDO, 2.0V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
J50	-	R1154N050B	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J50	-	TK71250M	LVR-IC	LDO, 5.0V±1%, 160mA	SOT-23-5	28y3	VR24	6a	Tok
J51	-	R1154N051B	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J52	-	R1154N052B	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J53	-	R1154N053B	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J54	-	R1154N054B	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J55	-	R1154N055B	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J56	-	R1154N056B	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J57	-	R1154N057B	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J58	-	R1154N058B	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J59	-	R1154N059B	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J6	-	BL8555-16JQ	LVR-IC	LDO, 1.6V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J6	-	BL8555-16JRA	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J6	-	BL8555-16JRB	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J6	-	BL8558-16PRC	LVR-IC	LDO, 1.6V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J6	-	BL8558-16PRN	LVR-IC	LDO, 1.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J6	-	BL8591CB5TR16	LVR-IC	LDO, 1.6V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J6	-	ELM89263B	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
J6	-	LR8555-16JQ	LVR-IC	LDO, 1.6V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J6	-	LR8555-16JRA	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J6	-	LR8555-16JRB	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J6	-	LR8558-16PRN	LVR-IC	LDO, 1.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J6	-	RN5RG26AA	LVR-IC	Ext. transistor, 2.6V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
J6	-	RT9167A-21CB	LVR-IC	LDO, 2.1V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
J6	-	TC7SZU04F	CMOS-Log	Inverter	SSOP-5	28	Log6	6a	Tos
J6	-	TC7SZU04FU	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	Tos



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J6	ea	BL8555-16VQ	LVR-IC	LDO, 1.6V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J6	ea	BL8555-16VRA	LVR-IC	LDO, 1.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J6	ea	BL8555-16VRB	LVR-IC	LDO, 1.6V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J6	ea	LR8555-16VQ	LVR-IC	LDO, 1.6V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J6	ea	LR8555-16VRA	LVR-IC	LDO, 1.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J6	ea	LR8555-16VRB	LVR-IC	LDO, 1.6V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J6	eu	BL8555-26VQ	LVR-IC	LDO, 2.6V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J6	eu	BL8555-26VRA	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J6	eu	BL8555-26VRB	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J6	eu	BL8558-26PRC	LVR-IC	LDO, 2.6V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J6	eu	BL8558-26PRN	LVR-IC	LDO, 2.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J6	eu	BL8591CB5TR26	LVR-IC	LDO, 2.6V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J6	eu	LR8555-26VQ	LVR-IC	LDO, 2.6V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J6	eu	LR8555-26VRA	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J6	eu	LR8555-26VRB	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J6	eu	LR8558-26PRN	LVR-IC	LDO, 2.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J6	fg	BL8555-36VQ	LVR-IC	LDO, 3.6V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J6	fg	BL8555-36VRA	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J6	fg	BL8555-36VRB	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J6	fg	BL8558-36PRC	LVR-IC	LDO, 3.6V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J6	fg	BL8558-36PRN	LVR-IC	LDO, 3.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J6	fg	BL8591CB5TR36	LVR-IC	LDO, 3.6V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J6	fg	LR8555-36VQ	LVR-IC	LDO, 3.6V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J6	fg	LR8555-36VRA	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J6	fg	LR8555-36VRB	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J6	fg	LR8558-36PRN	LVR-IC	LDO, 3.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J6	fh	BL8555-46VQ	LVR-IC	LDO, 4.6V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J6	fh	BL8555-46VRA	LVR-IC	LDO, 4.6V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J6	fh	BL8555-46VRB	LVR-IC	LDO, 4.6V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J6	fh	LR8555-46VQ	LVR-IC	LDO, 4.6V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J6	fh	LR8555-46VRA	LVR-IC	LDO, 4.6V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J6	fh	LR8555-46VRB	LVR-IC	LDO, 4.6V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J6	fk	BL8555-36JQ	LVR-IC	LDO, 3.6V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J6	fk	BL8555-36JRA	LVR-IC	LDO, 3.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J6	fk	BL8555-36JRB	LVR-IC	LDO, 3.6V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J6	fk	LR8555-36JQ	LVR-IC	LDO, 3.6V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J6	fk	LR8555-36JRA	LVR-IC	LDO, 3.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J6	fk	LR8555-36JRB	LVR-IC	LDO, 3.6V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J6	fm	BL8555-46JQ	LVR-IC	LDO, 4.6V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J6	fm	BL8555-46JRA	LVR-IC	LDO, 4.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J6	fm	BL8555-46JRB	LVR-IC	LDO, 4.6V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J6	fm	LR8555-46JQ	LVR-IC	LDO, 4.6V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J6	fm	LR8555-46JRA	LVR-IC	LDO, 4.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J6	fm	LR8555-46JRB	LVR-IC	LDO, 4.6V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J6	fp	BL8555-26JQ	LVR-IC	LDO, 2.6V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J6	fp	BL8555-26JRA	LVR-IC	LDO, 2.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J6	fp	BL8555-26JRB	LVR-IC	LDO, 2.6V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J6	fp	LR8555-26JQ	LVR-IC	LDO, 2.6V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J6	fp	LR8555-26JRA	LVR-IC	LDO, 2.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J6	fp	LR8555-26JRB	LVR-IC	LDO, 2.6V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J60	-	R1154N060B	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J61	-	R1154N061B	LVR-IC	LDO, 6.1V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J62	-	R1154N062B	LVR-IC	LDO, 6.2V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J63	-	R1154N063B	LVR-IC	LDO, 6.3V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J64	-	R1154N064B	LVR-IC	LDO, 6.4V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J65	-	R1154N065B	LVR-IC	LDO, 6.5V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J66	-	R1154N066B	LVR-IC	LDO, 6.6V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J67	-	R1154N067B	LVR-IC	LDO, 6.7V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J68	-	R1154N068B	LVR-IC	LDO, 6.8V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J69	-	R1154N069B	LVR-IC	LDO, 6.9V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J7	-	BL8555-17JQ	LVR-IC	LDO, 1.7V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J7	-	BL8555-17JRA	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J7	-	BL8555-17JRB	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J7	-	BL8558-17PRC	LVR-IC	LDO, 1.7V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J7	-	BL8558-17PRN	LVR-IC	LDO, 1.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J7	-	BL8591CB5TR17	LVR-IC	LDO, 1.7V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J7	-	ELM89273B	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
J7	-	LR8555-17JQ	LVR-IC	LDO, 1.7V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J7	-	LR8555-17JRA	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J7	-	LR8555-17JRB	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J7	-	LR8558-17PRN	LVR-IC	LDO, 1.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J7	-	RN5RG27AA	LVR-IC	Ext. transistor, 2.7V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
J7	-	RT9167A-22CB	LVR-IC	LDO, 2.2V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
J7	ea	BL8555-17VQ	LVR-IC	LDO, 1.7V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J7	ea	BL8555-17VRA	LVR-IC	LDO, 1.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J7	ea	BL8555-17VRB	LVR-IC	LDO, 1.7V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J7	ea	LR8555-17VQ	LVR-IC	LDO, 1.7V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J7	ea	LR8555-17VRA	LVR-IC	LDO, 1.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J7	ea	LR8555-17VRB	LVR-IC	LDO, 1.7V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J7	eu	BL8555-27VQ	LVR-IC	LDO, 2.7V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J7	eu	BL8555-27VRA	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J7	eu	BL8555-27VRB	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J7	eu	BL8558-27PRC	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J7	eu	BL8558-27PRN	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J7	eu	BL8591CB5TR27	LVR-IC	LDO, 2.7V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J7	eu	LR8555-27VQ	LVR-IC	LDO, 2.7V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J7	eu	LR8555-27VRA	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J7	eu	LR8555-27VRB	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J7	eu	LR8558-27PRN	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J7	fg	BL8555-37VQ	LVR-IC	LDO, 3.7V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J7	fg	BL8555-37VRA	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J7	fg	BL8555-37VRB	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J7	fg	BL8558-37PRC	LVR-IC	LDO, 3.7V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J7	fg	BL8558-37PRN	LVR-IC	LDO, 3.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J7	fg	BL8591CB5TR37	LVR-IC	LDO, 3.7V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J7	fg	LR8555-37VQ	LVR-IC	LDO, 3.7V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J7	fg	LR8555-37VRA	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J7	fg	LR8555-37VRB	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J7	fg	LR8558-37PRN	LVR-IC	LDO, 3.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J7	fh	BL8555-47VQ	LVR-IC	LDO, 4.7V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J7	fh	BL8555-47VRA	LVR-IC	LDO, 4.7V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J7	fh	BL8555-47VRB	LVR-IC	LDO, 4.7V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J7	fh	LR8555-47VQ	LVR-IC	LDO, 4.7V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J7	fh	LR8555-47VRA	LVR-IC	LDO, 4.7V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J7	fh	LR8555-47VRB	LVR-IC	LDO, 4.7V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J7	fk	BL8555-37JQ	LVR-IC	LDO, 3.7V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J7	fk	BL8555-37JRA	LVR-IC	LDO, 3.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J7	fk	BL8555-37JRB	LVR-IC	LDO, 3.7V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J7	fk	LR8555-37JQ	LVR-IC	LDO, 3.7V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J7	fk	LR8555-37JRA	LVR-IC	LDO, 3.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J7	fk	LR8555-37JRB	LVR-IC	LDO, 3.7V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J7	fm	BL8555-47JQ	LVR-IC	LDO, 4.7V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J7	fm	BL8555-47JRA	LVR-IC	LDO, 4.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J7	fm	BL8555-47JRB	LVR-IC	LDO, 4.7V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J7	fm	LR8555-47JQ	LVR-IC	LDO, 4.7V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J7	fm	LR8555-47JRA	LVR-IC	LDO, 4.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J7	fm	LR8555-47JRB	LVR-IC	LDO, 4.7V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J7	fp	BL8555-27JQ	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J7	fp	BL8555-27JRA	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J7	fp	BL8555-27JRB	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J7	fp	LR8555-27JQ	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J7	fp	LR8555-27JRA	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J7	fp	LR8555-27JRB	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J70	-	R1154N070B	LVR-IC	LDO, 7V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J71	-	R1154N071B	LVR-IC	LDO, 7.1V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J72	-	R1154N072B	LVR-IC	LDO, 7.2V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J73	-	R1154N073B	LVR-IC	LDO, 7.3V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J74	-	R1154N074B	LVR-IC	LDO, 7.4V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J75	-	R1154N075B	LVR-IC	LDO, 7.5V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J76	-	R1154N076B	LVR-IC	LDO, 7.6V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J77	-	R1154N077B	LVR-IC	LDO, 7.7V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J78	-	R1154N078B	LVR-IC	LDO, 7.8V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J79	-	R1154N079B	LVR-IC	LDO, 7.9V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J8	-	BL8555-18JQ	LVR-IC	LDO, 1.8V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J8	-	BL8555-18JRA	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J8	-	BL8555-18JRB	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J8	-	BL8558-18PRC	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J8	-	BL8558-18PRN	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J8	-	BL8591CB5TR18	LVR-IC	LDO, 1.8V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J8	-	ELM89283B	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J8	-	LR8555-18JQ	LVR-IC	LDO, 1.8V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J8	-	LR8555-18JRA	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J8	-	LR8555-18JRB	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J8	-	LR8558-18PRN	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J8	-	RN5RG28AA	LVR-IC	Ext. transistor, 2.8V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
J8	-	RT9167A-23CB	LVR-IC	LDO, 2.3V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
J8	-	Si91842DT-12	LVR-IC	LDO, LN, 1.2V±1.5%, 150mA, +CE, -Error,	SOT-23-5	28w	VR17	6k	Vs
J8	ea	BL8555-18VQ	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J8	ea	BL8555-18VRA	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J8	ea	BL8555-18VRB	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J8	ea	LR8555-18VQ	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J8	ea	LR8555-18VRA	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J8	ea	LR8555-18VRB	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J8	eu	BL8555-28VQ	LVR-IC	LDO, 2.8V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J8	eu	BL8555-28VRA	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J8	eu	BL8555-28VRB	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J8	eu	BL8558-28PRC	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J8	eu	BL8558-28PRN	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J8	eu	BL8591CB5TR28	LVR-IC	LDO, 2.8V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J8	eu	LR8555-28VQ	LVR-IC	LDO, 2.8V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J8	eu	LR8555-28VRA	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J8	eu	LR8555-28VRB	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J8	eu	LR8558-28PRN	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J8	fg	BL8555-38VQ	LVR-IC	LDO, 3.8V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J8	fg	BL8555-38VRA	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J8	fg	BL8555-38VRB	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J8	fg	BL8558-38PRC	LVR-IC	LDO, 3.8V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J8	fg	BL8558-38PRN	LVR-IC	LDO, 3.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J8	fg	BL8591CB5TR38	LVR-IC	LDO, 3.8V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J8	fg	LR8555-38VQ	LVR-IC	LDO, 3.8V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J8	fg	LR8555-38VRA	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J8	fg	LR8555-38VRB	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J8	fg	LR8558-38PRN	LVR-IC	LDO, 3.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J8	fh	BL8555-48VQ	LVR-IC	LDO, 4.8V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J8	fh	BL8555-48VRA	LVR-IC	LDO, 4.8V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J8	fh	BL8555-48VRB	LVR-IC	LDO, 4.8V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J8	fh	LR8555-48VQ	LVR-IC	LDO, 4.8V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J8	fh	LR8555-48VRA	LVR-IC	LDO, 4.8V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J8	fh	LR8555-48VRB	LVR-IC	LDO, 4.8V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J8	fk	BL8555-38JQ	LVR-IC	LDO, 3.8V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J8	fk	BL8555-38JRA	LVR-IC	LDO, 3.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J8	fk	BL8555-38JRB	LVR-IC	LDO, 3.8V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J8	fk	LR8555-38JQ	LVR-IC	LDO, 3.8V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J8	fk	LR8555-38JRA	LVR-IC	LDO, 3.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J8	fk	LR8555-38JRB	LVR-IC	LDO, 3.8V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J8	fm	BL8555-48JQ	LVR-IC	LDO, 4.8V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J8	fm	BL8555-48JRA	LVR-IC	LDO, 4.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J8	fm	BL8555-48JRB	LVR-IC	LDO, 4.8V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J8	fm	LR8555-48JQ	LVR-IC	LDO, 4.8V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J8	fm	LR8555-48JRA	LVR-IC	LDO, 4.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J8	fm	LR8555-48JRB	LVR-IC	LDO, 4.8V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J8	fp	BL8555-28JQ	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J8	fp	BL8555-28JRA	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J8	fp	BL8555-28JRB	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J8	fp	LR8555-28JQ	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J8	fp	LR8555-28JRA	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J8	fp	LR8555-28JRB	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J80	-	R1154N080B	LVR-IC	LDO, 8V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J81	-	R1154N081B	LVR-IC	LDO, 8.1V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J82	-	R1154N082B	LVR-IC	LDO, 8.2V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J83	-	R1154N083B	LVR-IC	LDO, 8.3V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J84	-	R1154N084B	LVR-IC	LDO, 8.4V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J85	-	R1154N085B	LVR-IC	LDO, 8.5V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J86	-	R1154N086B	LVR-IC	LDO, 8.6V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J87	-	R1154N087B	LVR-IC	LDO, 8.7V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J88	-	R1154N088B	LVR-IC	LDO, 8.8V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J89	-	R1154N089B	LVR-IC	LDO, 8.9V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J9	-	BL8555-19JQ	LVR-IC	LDO, 1.9V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J9	-	BL8555-19JRA	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J9	-	BL8555-19JRB	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J9	-	BL8558-19PRC	LVR-IC	LDO, 1.9V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J9	-	BL8558-19PRN	LVR-IC	LDO, 1.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J9	-	BL8591CB5TR19	LVR-IC	LDO, 1.9V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J9	-	ELM89293B	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
J9	-	LR8555-19JQ	LVR-IC	LDO, 1.9V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J9	-	LR8555-19JRA	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J9	-	LR8555-19JRB	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J9	-	LR8558-19PRN	LVR-IC	LDO, 1.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J9	-	RN5RG29AA	LVR-IC	Ext. transistor, 2.9V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
J9	-	RT9167A-24CB	LVR-IC	LDO, 2.4V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
J9	-	TC7SB66FU	CMOS-Log	Single-pole single-throw analog switch	SOT-353	28	Log16	6a	Tos
J9	ea	BL8555-19VQ	LVR-IC	LDO, 1.9V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J9	ea	BL8555-19VRA	LVR-IC	LDO, 1.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J9	ea	BL8555-19VRB	LVR-IC	LDO, 1.9V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J9	ea	LR8555-19VQ	LVR-IC	LDO, 1.9V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J9	ea	LR8555-19VRA	LVR-IC	LDO, 1.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J9	ea	LR8555-19VRB	LVR-IC	LDO, 1.9V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J9	eu	BL8555-29VQ	LVR-IC	LDO, 2.9V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J9	eu	BL8555-29VRA	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J9	eu	BL8555-29VRB	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J9	eu	BL8558-29PRC	LVR-IC	LDO, 2.9V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J9	eu	BL8558-29PRN	LVR-IC	LDO, 2.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J9	eu	BL8591CB5TR29	LVR-IC	LDO, 2.9V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J9	eu	LR8555-29VQ	LVR-IC	LDO, 2.9V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J9	eu	LR8555-29VRA	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J9	eu	LR8555-29VRB	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J9	eu	LR8558-29PRN	LVR-IC	LDO, 2.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J9	fg	BL8555-39VQ	LVR-IC	LDO, 3.9V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J9	fg	BL8555-39VRA	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J9	fg	BL8555-39VRB	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J9	fg	BL8558-39PRC	LVR-IC	LDO, 3.9V±2%, 500mA, +CE	SOT-23-5	28vc	VR4	6kg	Shb
J9	fg	BL8558-39PRN	LVR-IC	LDO, 3.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J9	fg	BL8591CB5TR39	LVR-IC	LDO, 3.9V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6kf	Shb
J9	fg	LR8555-39VQ	LVR-IC	LDO, 3.9V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J9	fg	LR8555-39VRA	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J9	fg	LR8555-39VRB	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J9	fg	LR8558-39PRN	LVR-IC	LDO, 3.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kf	Lrc
J9	fh	BL8555-49VQ	LVR-IC	LDO, 4.9V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Shb
J9	fh	BL8555-49VRA	LVR-IC	LDO, 4.9V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Shb
J9	fh	BL8555-49VRB	LVR-IC	LDO, 4.9V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Shb
J9	fh	LR8555-49VQ	LVR-IC	LDO, 4.9V±2%, 500mA	SC-70-5	28ym	VR1	6kd	Lrc
J9	fh	LR8555-49VRA	LVR-IC	LDO, 4.9V±2%, 500mA	SOT-23-5	28ym	VR1	6kd	Lrc
J9	fh	LR8555-49VRB	LVR-IC	LDO, 4.9V±2%, 500mA	SOT-23-5	28c5	VR1	6kc	Lrc
J9	fk	BL8555-39JQ	LVR-IC	LDO, 3.9V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J9	fk	BL8555-39JRA	LVR-IC	LDO, 3.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J9	fk	BL8555-39JRB	LVR-IC	LDO, 3.9V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J9	fk	LR8555-39JQ	LVR-IC	LDO, 3.9V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J9	fk	LR8555-39JRA	LVR-IC	LDO, 3.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J9	fk	LR8555-39JRB	LVR-IC	LDO, 3.9V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J9	fm	BL8555-49JQ	LVR-IC	LDO, 4.9V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J9	fm	BL8555-49JRA	LVR-IC	LDO, 4.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J9	fm	BL8555-49JRB	LVR-IC	LDO, 4.9V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J9	fm	LR8555-49JQ	LVR-IC	LDO, 4.9V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J9	fm	LR8555-49JRA	LVR-IC	LDO, 4.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J9	fm	LR8555-49JRB	LVR-IC	LDO, 4.9V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J9	fp	BL8555-29JQ	LVR-IC	LDO, 2.9V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Shb
J9	fp	BL8555-29JRA	LVR-IC	LDO, 2.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Shb
J9	fp	BL8555-29JRB	LVR-IC	LDO, 2.9V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Shb
J9	fp	LR8555-29JQ	LVR-IC	LDO, 2.9V±2%, 500mA, +CE	SC-70-5	28cx	VR4	6kd	Lrc
J9	fp	LR8555-29JRA	LVR-IC	LDO, 2.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6kd	Lrc
J9	fp	LR8555-29JRB	LVR-IC	LDO, 2.9V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6kc	Lrc
J90	-	R1154N090B	LVR-IC	LDO, 9V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J91	-	R1154N091B	LVR-IC	LDO, 9.1V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J92	-	R1154N092B	LVR-IC	LDO, 9.2V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J93	-	R1154N093B	LVR-IC	LDO, 9.3V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J94	-	R1154N094B	LVR-IC	LDO, 9.4V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J95	-	R1154N095B	LVR-IC	LDO, 9.5V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J96	-	R1154N096B	LVR-IC	LDO, 9.6V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J97	-	R1154N097B	LVR-IC	LDO, 9.7V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
J98	-	R1154N098B	LVR-IC	LDO, 9.8V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J99	-	R1154N099B	LVR-IC	LDO, 9.9V±2%, 150mA, +CE	SOT-23-5	28vrd	VR4	6g	Ric
JA	-	BU4833FWE	Vdet-IC	3.3V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
JA	-	BU4833G	Vdet-IC	3.3V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
JA	-	IDT74ALVCH1G00DY	CMOS-Log	2-input NAND gate	SO5-1	28	Log1	6g	Idt
JA	-	KRC651F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=4.7k/4.7k	TFSV	30/TD6	TD6	6a	Kec
JA	-	RT9167A-25CB	LVR-IC	LDO, 2.5V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JA	-	TC6502P045VCT	Tdet-IC	45°C±0.5°C, +Tover ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
JA=	-	RT9167A-25GB	LVR-IC	LDO, 2.5V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JA2	-	S-80141ALMC-JA2-T2	Vdet-IC	4.1V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JA3	-	S-80142ALMC-JA3-T2	Vdet-IC	4.2V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JA4	-	S-80143ALMC-JA4-T2	Vdet-IC	4.3V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JA5	-	S-80144ALMC-JA5-T2	Vdet-IC	4.4V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JA6	-	S-80145ALMC-JA6-T2	Vdet-IC	4.5V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JA7	-	S-80146ALMC-JA7-T2	Vdet-IC	4.6V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JA8	-	S-80147ALMC-JA8-T2	Vdet-IC	4.7V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JA9	-	S-80148ALMC-JA9-T2	Vdet-IC	4.8V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAA	-	RP171N121B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAB	-	RP171N121B5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAC	-	RP171N131B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAD	-	RP171N141B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAE	-	RP171N151B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAF	-	RP171N161B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAG	-	RP171N171B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAH	-	RP171N181B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAH	-	S-80122ALMC-JAH-T2	Vdet-IC	2.2V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAI	-	S-80123ALMC-JAI-T2	Vdet-IC	2.3V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAJ	-	RP171N181B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAJ	-	S-80124ALMC-JAJ-T2	Vdet-IC	2.4V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAK	-	RP171N191B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAK	-	S-80125ALMC-JAK-T2	Vdet-IC	2.5V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAL	-	RP171N201B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAL	-	S-80126ALMC-JAL-T2	Vdet-IC	2.6V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAM	-	RP171N211B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAM	-	S-80127ALMC-JAM-T2	Vdet-IC	2.7V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAN	-	RP171N221B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAN	-	S-80128ALMC-JAN-T2	Vdet-IC	2.8V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAO	-	S-80129ALMC-JAO-T2	Vdet-IC	2.9V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAP	-	RP171N231B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAP	-	S-80130ALMC-JAP-T2	Vdet-IC	3.0V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAQ	-	RP171N241B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAQ	-	S-80131ALMC-JAQ-T2	Vdet-IC	3.1V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAR	-	RP171N251B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAR	-	S-80132ALMC-JAR-T2	Vdet-IC	3.2V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAS	-	RP171N261B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAS	-	S-80133ALMC-JAS-T2	Vdet-IC	3.3V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAT	-	RP171N271B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAT	-	S-80134ALMC-JAT-T2	Vdet-IC	3.4V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAU	-	RP171N281B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAU	-	S-80135ALMC-JAU-T2	Vdet-IC	3.5V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAV	-	RP171N281B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAV	-	S-80136ALMC-JAV-T2	Vdet-IC	3.6V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAW	-	RP171N291B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAW	-	S-80137ALMC-JAW-T2	Vdet-IC	3.7V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAX	-	RP171N301B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAX	-	S-80138ALMC-JAX-T2	Vdet-IC	3.8V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAY	-	RP171N311B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAY	-	S-80139ALMC-JAY-T2	Vdet-IC	3.9V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JAZ	-	RP171N321B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JAZ	-	S-80140ALMC-JAZ-T2	Vdet-IC	4.0V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JB	-	BU4834FWE	Vdet-IC	3.4V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
JB	-	BU4834G	Vdet-IC	3.4V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
JB	-	IDT74ALVCH1G02DY	CMOS-Log	2-input NOR gate	SO5-1	28	Log2	6g	Idt
JB	-	KRC652F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=10k/10k	TFSV	30/TD6	TD6	6a	Kec
JB	-	RT9167A-26CB	LVR-IC	LDO, 2.6V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JB	-	TC7SZ125F	CMOS-Log	Bus buffer gate with 3-state output	SSOP-5	28	Log14	6a	Tos
JB	-	TC7SZ125FU	CMOS-Log	Bus buffer gate with 3-state output	SC-70-5	28	Log14	6a	Tos
JBA	-	RP171N121D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBA	-	S-80149ALMC-JBA-T2	Vdet-IC	4.9V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JBB	-	RP171N121D5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBB	-	S-80150ALMC-JBB-T2	Vdet-IC	5.0V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JBC	-	RP171N131D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBC	-	S-80151ALMC-JBC-T2	Vdet-IC	5.1V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JBD	-	RP171N141D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBD	-	S-80152ALMC-JBD-T2	Vdet-IC	5.2V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JBE	-	RP171N151D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBE	-	S-80153ALMC-JBE-T2	Vdet-IC	5.3V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JBF	-	RP171N161D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBF	-	S-80154ALMC-JBF-T2	Vdet-IC	5.4V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JBG	-	RP171N171D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBG	-	S-80155ALMC-JBG-T2	Vdet-IC	5.5V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JBH	-	RP171N181D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBH	-	S-80156ALMC-JBH-T2	Vdet-IC	5.6V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JBI	-	S-80157ALMC-JBI-T2	Vdet-IC	5.7V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JBJ	-	RP171N181D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBJ	-	S-80158ALMC-JBJ-T2	Vdet-IC	5.8V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JBK	-	RP171N191D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBK	-	S-80159ALMC-JBK-T2	Vdet-IC	5.9V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JBL	-	RP171N201D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBL	-	S-80160ALMC-JBL-T2	Vdet-IC	6.0V±2%, -Reset PPO, Td=50ms	SOT-23-5	28yd	VD4	6a	Sii
JBM	-	RP171N211D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBN	-	RP171N221D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBP	-	RP171N231D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBQ	-	RP171N241D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBR	-	RP171N251D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBS	-	RP171N261D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBT	-	RP171N271D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBU	-	RP171N281D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBV	-	RP171N281D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBW	-	RP171N291D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBX	-	RP171N301D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBY	-	RP171N311D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JBZ	-	RP171N321D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
JC	-	AAT3221IGV-2.9	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6k	Sky
JC	-	BU4835FWE	Vdet-IC	3.5V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
JC	-	BU4835G	Vdet-IC	3.5V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
JC	-	IDT74ALVCH1G04DY	CMOS-Log	Inverter	SO5-1	28	Log6	6g	Idt
JC	-	KRC653F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=22k/22k	TFSV	30/TD6	TD6	6a	Kec
JC	-	RT9167A-27CB	LVR-IC	LDO, 2.7V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JC	-	TC6502P065VCT	Tdet-IC	65°C±0.5°C, +Tover ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
JC	-	TC7SZ126F	CMOS-Log	Bus buffer gate with 3-state output	SSOP-5	28	Log13	6a	Tos
JC	-	TC7SZ126FU	CMOS-Log	Bus buffer gate with 3-state output	SC-70-5	28	Log13	6a	Tos
JC2	-	S-80141ANMC-JC2-T2	Vdet-IC	4.1V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JC3	-	S-80142ANMC-JC3-T2	Vdet-IC	4.2V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JC4	-	S-80143ANMC-JC4-T2	Vdet-IC	4.3V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JC5	-	S-80144ANMC-JC5-T2	Vdet-IC	4.4V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JC6	-	S-80145ANMC-JC6-T2	Vdet-IC	4.5V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JC7	-	S-80146ANMC-JC7-T2	Vdet-IC	4.6V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JC8	-	S-80147ANMC-JC8-T2	Vdet-IC	4.7V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JC9	-	S-80148ANMC-JC9-T2	Vdet-IC	4.8V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCH	-	S-80122ANMC-JCH-T2	Vdet-IC	2.2V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCI	-	S-80123ANMC-JCI-T2	Vdet-IC	2.3V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCJ	-	S-80124ANMC-JCJ-T2	Vdet-IC	2.4V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCK	-	S-80125ANMC-JCK-T2	Vdet-IC	2.5V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCL	-	S-80126ANMC-JCL-T2	Vdet-IC	2.6V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCM	-	S-80127ANMC-JCM-T2	Vdet-IC	2.7V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCN	-	S-80128ANMC-JCN-T2	Vdet-IC	2.8V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCO	-	S-80129ANMC-JCO-T2	Vdet-IC	2.9V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCP	-	S-80130ANMC-JCP-T2	Vdet-IC	3.0V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCQ	-	S-80131ANMC-JCQ-T2	Vdet-IC	3.1V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCR	-	S-80132ANMC-JCR-T2	Vdet-IC	3.2V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCS	-	S-80133ANMC-JCS-T2	Vdet-IC	3.3V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCT	-	S-80134ANMC-JCT-T2	Vdet-IC	3.4V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCU	-	S-80135ANMC-JCU-T2	Vdet-IC	3.5V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCV	-	S-80136ANMC-JCV-T2	Vdet-IC	3.6V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCW	-	S-80137ANMC-JCW-T2	Vdet-IC	3.7V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCX	-	S-80138ANMC-JCX-T2	Vdet-IC	3.8V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCY	-	S-80139ANMC-JCY-T2	Vdet-IC	3.9V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JCZ	-	S-80140ANMC-JCZ-T2	Vdet-IC	4.0V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JD	-	BU4836FWE	Vdet-IC	3.6V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
JD	-	BU4836G	Vdet-IC	3.6V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JD	-	IDT74ALVCH1GU04DY	CMOS-Log	Inverter	SO5-1	28	Log6	6g	Idt
JD	-	KRC654F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=47k/47k	TFSV	30/TD6	TD6	6a	Kec
JD	-	RT9167A-30CB	LVR-IC	LDO, 3.0V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JD	-	TC6502P075VCT	Tdet-IC	75°C±0.5°C, +Tover ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
JD-	-	RT9167A-30PB	LVR-IC	LDO, 3.0V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JD=	-	RT9167A-30GB	LVR-IC	LDO, 3.0V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JDA	-	S-80149ANMC-JDA-T2	Vdet-IC	4.9V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JDB	-	S-80150ANMC-JDB-T2	Vdet-IC	5.0V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JDC	-	S-80151ANMC-JDC-T2	Vdet-IC	5.1V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JDD	-	S-80152ANMC-JDD-T2	Vdet-IC	5.2V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JDE	-	S-80153ANMC-JDE-T2	Vdet-IC	5.3V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JDF	-	S-80154ANMC-JDF-T2	Vdet-IC	5.4V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JDG	-	S-80155ANMC-JDG-T2	Vdet-IC	5.5V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JDH	-	S-80156ANMC-JDH-T2	Vdet-IC	5.6V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JDI	-	S-80157ANMC-JDI-T2	Vdet-IC	5.7V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JDJ	-	S-80158ANMC-JDJ-T2	Vdet-IC	5.8V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JDK	-	S-80159ANMC-JDK-T2	Vdet-IC	5.9V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JDL	-	S-80160ANMC-JDL-T2	Vdet-IC	6.0V±2%, -Reset ODO, Td=50ms	SOT-23-5	28yd	VD1	6a	Sii
JE	-	BU4837FWE	Vdet-IC	3.7V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
JE	-	BU4837G	Vdet-IC	3.7V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
JE	-	IDT74ALVCH1G08DY	CMOS-Log	2-input AND gate	SO5-1	28	Log3	6g	Idt
JE	-	RT9167A-29CB	LVR-IC	LDO, 2.9V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JE	-	TC7SZ05F	CMOS-Log	Inverter (ODO)	SSOP-5	28	Log19	6a	Tos
JE	-	TC7SZ05FU	CMOS-Log	Inverter (ODO)	SC-70-5	28	Log19	6a	Tos
JE-	-	RT9167A-29PB	LVR-IC	LDO, 2.9V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JE2	-	S-80141BLMC-JE2-T2	Vdet-IC	4.1V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JE3	-	S-80142BLMC-JE3-T2	Vdet-IC	4.2V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JE4	-	S-80143BLMC-JE4-T2	Vdet-IC	4.3V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JE5	-	S-80144BLMC-JE5-T2	Vdet-IC	4.4V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JE6	-	S-80145BLMC-JE6-T2	Vdet-IC	4.5V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JE7	-	S-80146BLMC-JE7-T2	Vdet-IC	4.6V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JE8	-	S-80147BLMC-JE8-T2	Vdet-IC	4.7V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JE9	-	S-80148BLMC-JE9-T2	Vdet-IC	4.8V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JEH	-	S-80122BLMC-JEH-T2	Vdet-IC	2.2V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JEI	-	S-80123BLMC-JEI-T2	Vdet-IC	2.3V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JEJ	-	S-80124BLMC-JEJ-T2	Vdet-IC	2.4V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JEK	-	S-80125BLMC-JEK-T2	Vdet-IC	2.5V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JEL	-	S-80126BLMC-JEL-T2	Vdet-IC	2.6V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JEM	-	S-80127BLMC-JEM-T2	Vdet-IC	2.7V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JEN	-	S-80128BLMC-JEN-T2	Vdet-IC	2.8V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JEO	-	S-80129BLMC-JEO-T2	Vdet-IC	2.9V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JEP	-	S-80130BLMC-JEP-T2	Vdet-IC	3.0V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JEQ	-	S-80131BLMC-JEQ-T2	Vdet-IC	3.1V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JER	-	S-80132BLMC-JER-T2	Vdet-IC	3.2V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JES	-	S-80133BLMC-JES-T2	Vdet-IC	3.3V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JET	-	S-80134BLMC-JET-T2	Vdet-IC	3.4V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JEU	-	S-80135BLMC-JEU-T2	Vdet-IC	3.5V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JEV	-	S-80136BLMC-JEV-T2	Vdet-IC	3.6V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JEW	-	S-80137BLMC-JEW-T2	Vdet-IC	3.7V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JEX	-	S-80138BLMC-JEX-T2	Vdet-IC	3.8V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JEY	-	S-80139BLMC-JEY-T2	Vdet-IC	3.9V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JEZ	-	S-80140BLMC-JEZ-T2	Vdet-IC	4.0V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JF	-	BU4838FWE	Vdet-IC	3.8V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
JF	-	BU4838G	Vdet-IC	3.8V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
JF	-	IDT74ALVCH1G14DY	CMOS-Log	Inverting Schmitt-trigger	SO5-1	28	Log7	6g	Idt
JF	-	RT9167A-28CB	LVR-IC	LDO, 2.8V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JF	-	TC6502P095VCT	Tdet-IC	95°C±0.5°C, +Tover ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
JF	-	TC7SB384FU	CMOS-Log	Bilateral analogic switch	SOT-353	28	Log86	6a	Tos
JF-	-	RT9167A-28PB	LVR-IC	LDO, 2.8V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JFA	-	S-80149BLMC-JFA-T2	Vdet-IC	4.9V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JFB	-	S-80150BLMC-JFB-T2	Vdet-IC	5.0V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JFC	-	S-80151BLMC-JFC-T2	Vdet-IC	5.1V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JFD	-	S-80152BLMC-JFD-T2	Vdet-IC	5.2V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JFE	-	S-80153BLMC-JFE-T2	Vdet-IC	5.3V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JFF	-	S-80154BLMC-JFF-T2	Vdet-IC	5.4V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JFG	-	S-80155BLMC-JFG-T2	Vdet-IC	5.5V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JFH	-	S-80156BLMC-JFH-T2	Vdet-IC	5.6V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JFI	-	S-80157BLMC-JFI-T2	Vdet-IC	5.7V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JFJ	-	S-80158BLMC-JFJ-T2	Vdet-IC	5.8V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JFK	-	S-80159BLMC-JFK-T2	Vdet-IC	5.9V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JFL	-	S-80160BLMCJFL-T2	Vdet-IC	6.0V±2%, -Reset PPO, Td=100ms	SOT-23-5	28yd	VD4	6a	Sii
JG	-	BU4839FWE	Vdet-IC	3.9V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
JG	-	BU4839G	Vdet-IC	3.9V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
JG	-	IDT74ALVCH1G32DY	CMOS-Log	2-input OR gate	SO5-1	28	Log4	6g	Idt
JG	-	KRC657F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=10k/47k	TFSV	30/TD6	TD6	6a	Kec
JG	-	RT9167A-31CB	LVR-IC	LDO, 3.1V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JG-	-	RT9167A-31PB	LVR-IC	LDO, 3.1V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JG2	-	S-80141BNMC-JG2-T2	Vdet-IC	4.1V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JG3	-	S-80142BNMC-JG3-T2	Vdet-IC	4.2V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JG4	-	S-80143BNMC-JG4-T2	Vdet-IC	4.3V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JG5	-	S-80144BNMC-JG5-T2	Vdet-IC	4.4V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JG6	-	S-80145BNMC-JG6-T2	Vdet-IC	4.5V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JG7	-	S-80146BNMC-JG7-T2	Vdet-IC	4.6V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JG8	-	S-80147BNMC-JG8-T2	Vdet-IC	4.7V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JG9	-	S-80148BNMC-JG9-T2	Vdet-IC	4.8V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGH	-	S-80122BNMC-JGH-T2	Vdet-IC	2.2V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGI	-	S-80123BNMC-JGI-T2	Vdet-IC	2.3V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGJ	-	S-80124BNMC-JGJ-T2	Vdet-IC	2.4V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGK	-	S-80125BNMC-JGK-T2	Vdet-IC	2.5V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGL	-	S-80126BNMC-JGL-T2	Vdet-IC	2.6V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGM	-	S-80127BNMC-JGM-T2	Vdet-IC	2.7V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGN	-	S-80128BNMC-JGN-T2	Vdet-IC	2.8V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGO	-	S-80129BNMC-JGO-T2	Vdet-IC	2.9V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGP	-	S-80130BNMC-JGP-T2	Vdet-IC	3.0V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGQ	-	S-80131BNMC-JGQ-T2	Vdet-IC	3.1V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGR	-	S-80132BNMC-JGR-T2	Vdet-IC	3.2V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGS	-	S-80133BNMC-JGS-T2	Vdet-IC	3.3V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGT	-	S-80134BNMC-JGT-T2	Vdet-IC	3.4V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGU	-	S-80135BNMC-JGU-T2	Vdet-IC	3.5V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGV	-	S-80136BNMC-JGV-T2	Vdet-IC	3.6V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGW	-	S-80137BNMC-JGW-T2	Vdet-IC	3.7V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGX	-	S-80138BNMC-JGX-T2	Vdet-IC	3.8V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGY	-	S-80139BNMC-JGY-T2	Vdet-IC	3.9V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JGZ	-	S-80140BNMC-JGZ-T2	Vdet-IC	4.0V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JH	-	BU4840FWE	Vdet-IC	4.0V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
JH	-	BU4840G	Vdet-IC	4.0V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
JH	-	IDT74ALVCH1G86DY	CMOS-Log	2-input EXCLUSIVE-OR gate	SO5-1	28	Log5	6g	Idt
JH	-	KRC658F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=22k/47k	TFSV	30/TD6	TD6	6a	Kec
JH	-	RT9167A-32CB	LVR-IC	LDO, 3.2V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JH	-	TC6502P115VCT	Tdet-IC	115°C±0.5°C, +Tover ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
JHA	-	S-80149BNMC-JHA-T2	Vdet-IC	4.9V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JHB	-	S-80150BNMC-JHB-T2	Vdet-IC	5.0V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JHC	-	S-80151BNMC-JHC-T2	Vdet-IC	5.1V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JHD	-	S-80152BNMC-JHD-T2	Vdet-IC	5.2V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JHE	-	S-80153BNMC-JHE-T2	Vdet-IC	5.3V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JHF	-	S-80154BNMC-JHF-T2	Vdet-IC	5.4V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JHG	-	S-80155BNMC-JHG-T2	Vdet-IC	5.5V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JHH	-	S-80156BNMC-JHH-T2	Vdet-IC	5.6V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JHI	-	S-80157BNMC-JHI-T2	Vdet-IC	5.7V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JHJ	-	S-80158BNMC-JHJ-T2	Vdet-IC	5.8V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JHK	-	S-80159BNMC-JHK-T2	Vdet-IC	5.9V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JHL	-	S-80160BNMC-JHL-T2	Vdet-IC	6.0V±2%, -Reset ODO, Td=100ms	SOT-23-5	28yd	VD1	6a	Sii
JI2	-	S-80141CLMC-JI2-T2	Vdet-IC	4.1V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JI3	-	S-80142CLMC-JI3-T2	Vdet-IC	4.2V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JI4	-	S-80143CLMC-JI4-T2	Vdet-IC	4.3V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JI5	-	S-80144CLMC-JI5-T2	Vdet-IC	4.4V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JI6	-	S-80145CLMC-JI6-T2	Vdet-IC	4.5V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JI7	-	S-80146CLMC-JI7-T2	Vdet-IC	4.6V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JI8	-	S-80147CLMC-JI8-T2	Vdet-IC	4.7V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JI9	-	S-80148CLMC-JI9-T2	Vdet-IC	4.8V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIH	-	S-80122CLMC-JIH-T2	Vdet-IC	2.2V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JII	-	S-80123CLMC-JII-T2	Vdet-IC	2.3V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIJ	-	S-80124CLMC-JIJ-T2	Vdet-IC	2.4V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIK	-	S-80125CLMC-JIK-T2	Vdet-IC	2.5V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIL	-	S-80126CLMC-JIL-T2	Vdet-IC	2.6V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIM	-	S-80127CLMC-JIM-T2	Vdet-IC	2.7V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIN	-	S-80128CLMC-JIN-T2	Vdet-IC	2.8V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIO	-	S-80129CLMC-JIO-T2	Vdet-IC	2.9V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIP	-	S-80130CLMC-JIP-T2	Vdet-IC	3.0V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIQ	-	S-80131CLMC-JIQ-T2	Vdet-IC	3.1V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JIR	-	S-80132CLMC-JIR-T2	Vdet-IC	3.2V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIS	-	S-80133CLMC-JIS-T2	Vdet-IC	3.3V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIT	-	S-80134CLMC-JIT-T2	Vdet-IC	3.4V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIU	-	S-80135CLMC-JIU-T2	Vdet-IC	3.5V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIV	-	S-80136CLMC-JIV-T2	Vdet-IC	3.6V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIW	-	S-80137CLMC-JIW-T2	Vdet-IC	3.7V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIX	-	S-80138CLMC-JGX-T2	Vdet-IC	3.8V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIY	-	S-80139CLMC-JIY-T2	Vdet-IC	3.9V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JIZ	-	S-80140CLMC-JIZ-T2	Vdet-IC	4.0V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JJ	-	BU4841FWE	Vdet-IC	4.1V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
JJ	-	BU4841G	Vdet-IC	4.1V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
JJ	-	KRC659F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=47k/22k	TFSV	30/TD6	TD6	6a	Kec
JJ	-	RT9167A-33CB	LVR-IC	LDO, 3.3V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JJ	-	TC6502P125VCT	Tdet-IC	125°C±0.5°C, +Tover ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
JJ-	-	RT9167A-33PB	LVR-IC	LDO, 3.3V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JJ=	-	RT9167A-33GB	LVR-IC	LDO, 3.3V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JJA	-	S-80149CLMC-JJA-T2	Vdet-IC	4.9V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JJB	-	S-80150CLMC-JJB-T2	Vdet-IC	5.0V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JJC	-	S-80151CLMC-JHC-T2	Vdet-IC	5.1V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JJD	-	S-80152CLMC-JJD-T2	Vdet-IC	5.2V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JJE	-	S-80153CLMC-JJE-T2	Vdet-IC	5.3V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JJF	-	S-80154CLMC-JJF-T2	Vdet-IC	5.4V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JJG	-	S-80155CLMC-JJG-T2	Vdet-IC	5.5V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JJH	-	S-80156CLMC-JJH-T2	Vdet-IC	5.6V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JJI	-	S-80157CLMC-JJI-T2	Vdet-IC	5.7V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JJJ	-	S-80158CLMC-JJJ-T2	Vdet-IC	5.8V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JJK	-	S-80159CLMC-JJK-T2	Vdet-IC	5.9V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JJL	-	S-80160CLMC-JJL-T2	Vdet-IC	6.0V±2%, -Reset PPO, Td=200ms	SOT-23-5	28yd	VD4	6a	Sii
JK	-	BU4842FWE	Vdet-IC	4.2V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
JK	-	BU4842G	Vdet-IC	4.2V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
JK	-	KRC660F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=4.7k	TFSV	30/TD6	TD6	6a	Kec
JK	-	RT9167A-34CB	LVR-IC	LDO, 3.4V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JK	-	TC7SB385FU	CMOS-Log	Single-pole single-throw analog switch	SOT-353	28	Log16	6a	Tos
JK2	-	S-80141CNMC-JK2-T2	Vdet-IC	4.1V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JK3	-	S-80142CNMC-JK3-T2	Vdet-IC	4.2V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JK4	-	S-80143CNMC-JK4-T2	Vdet-IC	4.3V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JK5	-	S-80144CNMC-JK5-T2	Vdet-IC	4.4V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JK6	-	S-80145CNMC-JK6-T2	Vdet-IC	4.5V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JK7	-	S-80146CNMC-JK7-T2	Vdet-IC	4.6V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JK8	-	S-80147CNMC-JK8-T2	Vdet-IC	4.7V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JK9	-	S-80148CNMC-JK9-T2	Vdet-IC	4.8V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKH	-	S-80122CNMC-JKH-T2	Vdet-IC	2.2V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKI	-	S-80123CNMC-JKI-T2	Vdet-IC	2.3V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKJ	-	S-80124CNMC-JKJ-T2	Vdet-IC	2.4V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKK	-	S-80125CNMC-JKK-T2	Vdet-IC	2.5V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKL	-	S-80126CNMC-JKL-T2	Vdet-IC	2.6V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKM	-	S-80127CNMC-JKM-T2	Vdet-IC	2.7V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKN	-	S-80128CNMC-JKN-T2	Vdet-IC	2.8V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKO	-	S-80129CNMC-JKO-T2	Vdet-IC	2.9V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKP	-	S-80130CNMC-JKP-T2	Vdet-IC	3.0V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKQ	-	S-80131CNMC-JKQ-T2	Vdet-IC	3.1V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKR	-	S-80132CNMC-JKR-T2	Vdet-IC	3.2V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKS	-	S-80133CNMC-JKS-T2	Vdet-IC	3.3V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKT	-	S-80134CNMC-JKT-T2	Vdet-IC	3.4V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKU	-	S-80135CNMC-JKU-T2	Vdet-IC	3.5V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKV	-	S-80136CNMC-JKV-T2	Vdet-IC	3.6V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKW	-	S-80137CNMC-JKW-T2	Vdet-IC	3.7V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKX	-	S-80138CNMC-JKX-T2	Vdet-IC	3.8V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKY	-	S-80139CNMC-JKY-T2	Vdet-IC	3.9V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JKZ	-	S-80140CNMC-JKZ-T2	Vdet-IC	4.0V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JL	-	BU4843FWE	Vdet-IC	4.3V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
JL	-	BU4843G	Vdet-IC	4.3V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
JL	-	KRC661F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=10k	TFSV	30/TD6	TD6	6a	Kec
JL	-	R1112N501B	LVR-IC	LDO, Low noise, 5.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
JL	-	RT9167A-35CB	LVR-IC	LDO, 3.5V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JL-	-	RT9167A-35PB	LVR-IC	LDO, 3.5V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JLA	-	S-80149CNMC-JLA-T2	Vdet-IC	4.9V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JLB	-	S-80150CNMC-JLB-T2	Vdet-IC	5.0V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JLC	-	S-80151CNMC-JLC-T2	Vdet-IC	5.1V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JLD	-	S-80152CNMC-JLD-T2	Vdet-IC	5.2V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JLE	-	S-80153CNMC-JLE-T2	Vdet-IC	5.3V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JLF	-	S-80154CNMC-JLF-T2	Vdet-IC	5.4V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JLG	-	S-80155CNMC-JLG-T2	Vdet-IC	5.5V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JLH	-	S-80156CNMC-JLH-T2	Vdet-IC	5.6V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JLI	-	S-80157CNMC-JLI-T2	Vdet-IC	5.7V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JLJ	-	S-80158CNMC-JLJ-T2	Vdet-IC	5.8V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JLK	-	S-80159CNMC-JLK-T2	Vdet-IC	5.9V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JLL	-	S-80160CNMC-JLL-T2	Vdet-IC	6.0V±2%, -Reset ODO, Td=200ms	SOT-23-5	28yd	VD1	6a	Sii
JM	-	BU4844FWE	Vdet-IC	4.4V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
JM	-	BU4844G	Vdet-IC	4.4V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
JM	-	IDT74ALVCH1G125DY	CMOS-Log	Bus buffer gate with 3-state output	SO5-1	28	Log14	6g	Idt
JM	-	RT9167A-36CB	LVR-IC	LDO, 3.6V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JN	-	AAT3515IGV-3.08-C	Vdet-IC	3.08V±1.5%, -MR, ±Reset PPO, 140ms	SOT-23-5	28xf	VD21	6k	Ant
JN	-	BU4845FWE	Vdet-IC	4.5V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
JN	-	BU4845G	Vdet-IC	4.5V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
JN	-	IDT74ALVCH1G126DY	CMOS-Log	Bus buffer gate with 3-state output	SO5-1	28	Log13	6g	Idt
JN	-	KRC663F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=22k	TFSV	30/TD6	TD6	6a	Kec
JN	-	RT9167A-37CB	LVR-IC	LDO, 3.7V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JN	-	TC7SBL384AFU	CMOS-Log	Bilateral analogic switch with level shifting	SOT-353	28	Log86	6a	Tos
JO	-	AAT3512IGV-2.63-C-C	Vdet-IC	2.63V±1.5%, -MR, +Reset PPO	SOT-23-5	28cp	VD17	6k	Ant
JO	-	TC7SBL384CFU	CMOS-Log	Bilateral analogic switch with level shifting	SOT-353	28	Log86	6a	Tos
JP	-	BU4846FWE	Vdet-IC	4.6V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
JP	-	BU4846G	Vdet-IC	4.6V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
JP	-	KRC664F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=47k	TFSV	30/TD6	TD6	6a	Kec
JP	-	RT9167A-38CB	LVR-IC	LDO, 3.8V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JQ	-	BU4847FWE	Vdet-IC	4.7V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
JQ	-	BU4847G	Vdet-IC	4.7V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
JR	-	BU4848FWE	Vdet-IC	4.8V±1%, -Reset ODO	VSOF-5	30vk	VD6	6e	Rhm
JR	-	BU4848G	Vdet-IC	4.8V±1%, -Reset ODO	SSOP-5	28vdm	VD6	6c	Rhm
JR	-	IDT74ALVCH1G79DY	CMOS-Log	Positive edge-triggered D-type flip-flop	SO5-1	28	Log20	6g	Idt
JS	-	BU4909FWE	Vdet-IC	0.9V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
JS	-	BU4909G	Vdet-IC	0.9V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
JS	-	TC7SBD384AFU	CMOS-Log	Bilateral analogic switch with level shifting	SOT-353	28	Log86	6a	Tos
JT	-	BU4910FWE	Vdet-IC	1.0V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
JT	-	BU4910G	Vdet-IC	1.0V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
JT	-	IDT74ALVCH1G06DY	CMOS-Log	Inverter (ODO)	SO5-1	28	Log19	6g	Idt
JT	-	TC7SBD385AFU	CMOS-Log	Bilateral analogic switch with level shifting	SOT-353	28	Log16	6a	Tos
JT-	-	RT9167A-42PB	LVR-IC	LDO, 4.2V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JU	-	BU4911FWE	Vdet-IC	1.1V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
JU	-	BU4911G	Vdet-IC	1.1V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
JV	-	BU4912FWE	Vdet-IC	1.2V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
JV	-	BU4912G	Vdet-IC	1.2V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
JV	-	IDT74ALVCH1G07DY	CMOS-Log	Noninverting buffer/driver (ODO)	SO5-1	28	Log8	6g	Idt
JV	-	TC7SBL66CFU	CMOS-Log	Single-pole single-throw analog switch	SOT-353	28	Log16	6a	Tos
JW	-	BU4913FWE	Vdet-IC	1.3V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
JW	-	BU4913G	Vdet-IC	1.3V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
JW	-	RT9167A-45CB	LVR-IC	LDO, 4.3V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JW-	-	RT9167A-45PB	LVR-IC	LDO, 4.3V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
JX	-	BU4914FWE	Vdet-IC	1.4V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
JX	-	BU4914G	Vdet-IC	1.4V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
JX12	-	LC1458CB5TR12	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX13	-	LC1458CB5TR13	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX14	-	LC1458CB5TR14	LVR-IC	LDO, 1.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX15	-	LC1458CB5TR15	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX16	-	LC1458CB5TR16	LVR-IC	LDO, 1.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX17	-	LC1458CB5TR17	LVR-IC	LDO, 1.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX18	-	LC1458CB5TR18	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX19	-	LC1458CB5TR19	LVR-IC	LDO, 1.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX20	-	LC1458CB5TR20	LVR-IC	LDO, 2.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX21	-	LC1458CB5TR21	LVR-IC	LDO, 2.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX22	-	LC1458CB5TR22	LVR-IC	LDO, 2.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX23	-	LC1458CB5TR23	LVR-IC	LDO, 2.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX24	-	LC1458CB5TR24	LVR-IC	LDO, 2.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX25	-	LC1458CB5TR25	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX26	-	LC1458CB5TR26	LVR-IC	LDO, 2.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX27	-	LC1458CB5TR27	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX28	-	LC1458CB5TR28	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX29	-	LC1458CB5TR29	LVR-IC	LDO, 2.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX30	-	LC1458CB5TR30	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX31	-	LC1458CB5TR31	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JX32	-	LC1458CB5TR32	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX33	-	LC1458CB5TR33	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX34	-	LC1458CB5TR34	LVR-IC	LDO, 3.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX35	-	LC1458CB5TR35	LVR-IC	LDO, 3.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX36	-	LC1458CB5TR36	LVR-IC	LDO, 3.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX37	-	LC1458CB5TR37	LVR-IC	LDO, 3.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX38	-	LC1458CB5TR38	LVR-IC	LDO, 3.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX39	-	LC1458CB5TR39	LVR-IC	LDO, 3.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX40	-	LC1458CB5TR40	LVR-IC	LDO, 4.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX41	-	LC1458CB5TR41	LVR-IC	LDO, 4.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX42	-	LC1458CB5TR42	LVR-IC	LDO, 4.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX43	-	LC1458CB5TR43	LVR-IC	LDO, 4.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JX44	-	LC1458CB5TR44	LVR-IC	LDO, 4.4V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6a	Lch
JY	-	BU4915FWE	Vdet-IC	1.5V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
JY	-	BU4915G	Vdet-IC	1.5V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
JY	-	IDT74ALVCH1G132DY	CMOS-Log	2-input NAND Schmitt-trigger	SO5-1	28	Log12	6g	Idt
JZ	-	BU4916FWE	Vdet-IC	1.6V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
JZ	-	BU4916G	Vdet-IC	1.6V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
K0	-	ELM89303B	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
K0	-	RN5RG30AA	LVR-IC	Ext. transistor, 3V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
K0	-	RT9167A-15CBR	LVR-IC	LDO, 1.5V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
K0	ea	RN5RY201A	DC-DC-IC	VFM step-up, 2V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
K001	-	RP113Q122D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K002	-	RP113Q132D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K003	-	RP113Q152D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K004	-	RP113Q182D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K005	-	RP113Q182D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K006	-	RP113Q192D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K007	-	RP113Q202D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K008	-	RP113Q212D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K009	-	RP113Q232D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K01	-	RP112N121B5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K010	-	RP113Q252D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K011	-	RP113Q262D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K012	-	RP113Q272D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K013	-	RP113Q282D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K014	-	RP113Q282D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K015	-	RP113Q292D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K016	-	RP113Q302D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K017	-	RP113Q312D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K018	-	RP113Q322D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K019	-	RP113Q332D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	SC-88A	28cx	VR4	6ma	Ric
K02	-	RP112N181B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K03	-	RP112N281B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K0A	-	RP400N181A	DC-DC-IC	PWM step-up, 700kHz, 1.8V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0B	-	RP400N191A	DC-DC-IC	PWM step-up, 700kHz, 1.9V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0C	-	RP400N201A	DC-DC-IC	PWM step-up, 700kHz, 2.0V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0D	-	RP400N211A	DC-DC-IC	PWM step-up, 700kHz, 2.1V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0E	-	RP400N221A	DC-DC-IC	PWM step-up, 700kHz, 2.2V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0F	-	RP400N231A	DC-DC-IC	PWM step-up, 700kHz, 2.3V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0G	-	RP400N241A	DC-DC-IC	PWM step-up, 700kHz, 2.4V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0H	-	RP400N251A	DC-DC-IC	PWM step-up, 700kHz, 2.5V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0J	-	RP400N261A	DC-DC-IC	PWM step-up, 700kHz, 2.6V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0K	-	RP400N271A	DC-DC-IC	PWM st-up, 700kHz, 2.7V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0L	-	RP400N281A	DC-DC-IC	PWM st-up, 700kHz, 2.8V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0M	-	RP400N291A	DC-DC-IC	PWM st-up, 700kHz, 2.9V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0N	-	RP400N301A	DC-DC-IC	PWM st-up, 700kHz, 3.0V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0P	-	RP400N311A	DC-DC-IC	PWM st-up, 700kHz, 3.1V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0Q	-	RP400N321A	DC-DC-IC	PWM st-up, 700kHz, 3.2V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0R	-	RP400N331A	DC-DC-IC	PWM st-up, 700kHz, 3.3V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0S	-	RP400N341A	DC-DC-IC	PWM st-up, 700kHz, 3.4V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0T	-	RP400N351A	DC-DC-IC	PWM st-up, 700kHz, 3.5V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0U	-	RP400N361A	DC-DC-IC	PWM st-up, 700kHz, 3.6V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0V	-	RP400N371A	DC-DC-IC	PWM st-up, 700kHz, 3.7V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0W	-	RP400N381A	DC-DC-IC	PWM st-up, 700kHz, 3.8V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0X	-	RP400N391A	DC-DC-IC	PWM st-up, 700kHz, 3.9V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0Y	-	RP400N401A	DC-DC-IC	PWM st-up, 700kHz, 4.0V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K0Z	-	RP400N411A	DC-DC-IC	PWM st-up, 700kHz, 4.1V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
k1	-	BD46E415G-M	Vdet-IC	4.1V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
K1	-	ELM89313B	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K1	-	RN5RG31AA	LVR-IC	Ext. transistor, 3.1V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
K1	-	RT9167A-16CBR	LVR-IC	LDO, 1.6V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
K1	ea	RN5RY211A	DC-DC-IC	VFM step-up, 2.1V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
K12	-	RP112N121B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K13	-	RP112N131B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K14	-	RP112N141B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K15	-	RP112N151B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K15	eb	XC6368A152MR	DC-DC-IC	PWM/PFM step-up, 1.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K15	ek	XC6366A152MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K16	-	RP112N161B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K16	eb	XC6368A162MR	DC-DC-IC	PWM/PFM step-up, 1.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K16	ek	XC6366A162MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K17	-	RP112N171B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K17	eb	XC6368A172MR	DC-DC-IC	PWM/PFM step-up, 1.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K17	ek	XC6366A172MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K18	-	RP112N181B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K18	eb	XC6368A182MR	DC-DC-IC	PWM/PFM step-up, 1.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K18	ek	XC6366A182MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K19	-	RP112N191B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K19	eb	XC6368A192MR	DC-DC-IC	PWM/PFM step-up, 1.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K19	ek	XC6366A192MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K1A	-	RP400N181C	DC-DC-IC	PWM step-up, 700kHz, 1.8V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1A	ek	XC6366A203MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K1B	-	RP400N191C	DC-DC-IC	PWM step-up, 700kHz, 1.9V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1C	-	RP400N201C	DC-DC-IC	PWM step-up, 700kHz, 2.0V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1D	-	RP400N211C	DC-DC-IC	PWM step-up, 700kHz, 2.1V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1E	-	RP400N221C	DC-DC-IC	PWM step-up, 700kHz, 2.2V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1F	-	RP400N231C	DC-DC-IC	PWM step-up, 700kHz, 2.3V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1F	eb	XC6368A153MR	DC-DC-IC	PWM/PFM step-up, 1.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K1F	ek	XC6366A153MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K1G	-	RP400N241C	DC-DC-IC	PWM step-up, 700kHz, 2.4V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1H	-	RP400N251C	DC-DC-IC	PWM step-up, 700kHz, 2.5V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1H	eb	XC6368A163MR	DC-DC-IC	PWM/PFM step-up, 1.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K1H	ek	XC6366A163MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K1J	-	RP400N261C	DC-DC-IC	PWM step-up, 700kHz, 2.6V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1K	-	RP400N271C	DC-DC-IC	PWM st-up, 700kHz, 2.7V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1K	eb	XC6368A173MR	DC-DC-IC	PWM/PFM step-up, 1.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K1K	ek	XC6366A173MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K1L	-	RP400N281C	DC-DC-IC	PWM st-up, 700kHz, 2.8V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1L	eb	XC6368A183MR	DC-DC-IC	PWM/PFM step-up, 1.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K1L	ek	XC6366A183MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K1M	-	RP400N291C	DC-DC-IC	PWM st-up, 700kHz, 2.9V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1M	eb	XC6368A193MR	DC-DC-IC	PWM/PFM step-up, 1.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K1M	ek	XC6366A193MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K1N	-	RP400N301C	DC-DC-IC	PWM st-up, 700kHz, 3.0V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1P	-	RP400N311C	DC-DC-IC	PWM st-up, 700kHz, 3.1V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1Q	-	RP400N321C	DC-DC-IC	PWM st-up, 700kHz, 3.2V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1R	-	RP400N331C	DC-DC-IC	PWM st-up, 700kHz, 3.3V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1S	-	RP400N341C	DC-DC-IC	PWM st-up, 700kHz, 3.4V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1T	-	RP400N351C	DC-DC-IC	PWM st-up, 700kHz, 3.5V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1U	-	RP400N361C	DC-DC-IC	PWM st-up, 700kHz, 3.6V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1V	-	RP400N371C	DC-DC-IC	PWM st-up, 700kHz, 3.7V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1W	-	RP400N381C	DC-DC-IC	PWM st-up, 700kHz, 3.8V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1X	-	RP400N391C	DC-DC-IC	PWM st-up, 700kHz, 3.9V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1Y	-	RP400N401C	DC-DC-IC	PWM st-up, 700kHz, 4.0V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
K1Z	-	RP400N411C	DC-DC-IC	PWM st-up, 700kHz, 4.1V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
k2	-	BD46E425G-M	Vdet-IC	4.2V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
K2	-	ELM89323B	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
K2	-	RN5RG32AA	LVR-IC	Ext. transistor, 3.2V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
K2	-	RT9167A-17CBR	LVR-IC	LDO, 1.7V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
K2	ea	RN5RY221A	DC-DC-IC	VFM step-up, 2.2V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
K20	-	RP112N201B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K20	eb	XC6368A202MR	DC-DC-IC	PWM/PFM step-up, 2.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K20	ek	XC6366A202MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K21	-	RP112N211B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K21	eb	XC6368A212MR	DC-DC-IC	PWM/PFM step-up, 2.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K21	ek	XC6366A212MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K21AG	-	LR1121BG-21-AF5-A	LVR-IC	LDO, 2.1V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K21AL	-	LR1121BL-21-AF5-A	LVR-IC	LDO, 2.1V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K21BG	-	LR1121BG-21-AF5-B	LVR-IC	LDO, 2.1V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K21BL	-	LR1121BL-21-AF5-B	LVR-IC	LDO, 2.1V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K22	-	RP112N221B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K22	eb	XC6368A222MR	DC-DC-IC	PWM/PFM step-up, 2.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K22	ek	XC6366A222MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K22AG	-	LR1121BG-22-AF5-A	LVR-IC	LDO, 2.2V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K22AL	-	LR1121BL-22-AF5-A	LVR-IC	LDO, 2.2V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K22BG	-	LR1121BG-22-AF5-B	LVR-IC	LDO, 2.2V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K22BL	-	LR1121BL-22-AF5-B	LVR-IC	LDO, 2.2V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K23	-	RP112N231B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K23	eb	XC6368A232MR	DC-DC-IC	PWM/PFM step-up, 2.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K23	ek	XC6366A232MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K23AG	-	LR1121BG-23-AF5-A	LVR-IC	LDO, 2.3V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K23AL	-	LR1121BL-23-AF5-A	LVR-IC	LDO, 2.3V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K23BG	-	LR1121BG-23-AF5-B	LVR-IC	LDO, 2.3V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K23BL	-	LR1121BL-23-AF5-B	LVR-IC	LDO, 2.3V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K24	-	RP112N241B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K24	eb	XC6368A242MR	DC-DC-IC	PWM/PFM step-up, 2.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K24	ek	XC6366A242MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K24	et	XC9302A242MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 2.4V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K24AG	-	LR1121BG-24-AF5-A	LVR-IC	LDO, 2.4V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K24AL	-	LR1121BL-24-AF5-A	LVR-IC	LDO, 2.4V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K24BG	-	LR1121BG-24-AF5-B	LVR-IC	LDO, 2.4V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K24BL	-	LR1121BL-24-AF5-B	LVR-IC	LDO, 2.4V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K25	-	RP112N251B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K25	eb	XC6368A252MR	DC-DC-IC	PWM/PFM step-up, 2.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K25	ek	XC6366A252MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K25	et	XC9302A252MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 2.5V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K25AG	-	LR1121BG-25-AF5-A	LVR-IC	LDO, 2.5V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K25AL	-	LR1121BL-25-AF5-A	LVR-IC	LDO, 2.5V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K25BG	-	LR1121BG-25-AF5-B	LVR-IC	LDO, 2.5V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K25BL	-	LR1121BL-25-AF5-B	LVR-IC	LDO, 2.5V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K26	-	RP112N261B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K26	eb	XC6368A262MR	DC-DC-IC	PWM/PFM step-up, 2.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K26	ek	XC6366A262MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K26	et	XC9302A262MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 2.6V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K26AG	-	LR1121BG-26-AF5-A	LVR-IC	LDO, 2.6V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K26AL	-	LR1121BL-26-AF5-A	LVR-IC	LDO, 2.6V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K26BG	-	LR1121BG-26-AF5-B	LVR-IC	LDO, 2.6V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K26BL	-	LR1121BL-26-AF5-B	LVR-IC	LDO, 2.6V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K27	-	RP112N271B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K27	eb	XC6368A272MR	DC-DC-IC	PWM/PFM step-up, 2.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K27	ek	XC6366A272MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K27	et	XC9302A272MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 2.7V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K27AG	-	LR1121BG-27-AF5-A	LVR-IC	LDO, 2.7V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K27AL	-	LR1121BL-27-AF5-A	LVR-IC	LDO, 2.7V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K27BG	-	LR1121BG-27-AF5-B	LVR-IC	LDO, 2.7V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K27BL	-	LR1121BL-27-AF5-B	LVR-IC	LDO, 2.7V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K28	-	RP112N281B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K28	eb	XC6368A282MR	DC-DC-IC	PWM/PFM step-up, 2.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K28	ek	XC6366A282MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K28	et	XC9302A282MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 2.8V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K28AG	-	LR1121BG-28-AF5-A	LVR-IC	LDO, 2.8V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K28AL	-	LR1121BL-28-AF5-A	LVR-IC	LDO, 2.8V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K28BG	-	LR1121BG-28-AF5-B	LVR-IC	LDO, 2.8V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K28BL	-	LR1121BL-28-AF5-B	LVR-IC	LDO, 2.8V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K29	-	RP112N291B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K29	eb	XC6368A292MR	DC-DC-IC	PWM/PFM step-up, 2.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K29	ek	XC6366A292MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K29	et	XC9302A292MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 2.9V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K29AG	-	LR1121BG-29-AF5-A	LVR-IC	LDO, 2.9V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K29AL	-	LR1121BL-29-AF5-A	LVR-IC	LDO, 2.9V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K29BG	-	LR1121BG-29-AF5-B	LVR-IC	LDO, 2.9V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K29BL	-	LR1121BL-29-AF5-B	LVR-IC	LDO, 2.9V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K2A	-	RP400N181B	DC-DC-IC	PWM step-up, 700kHz, 1.8V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2A	eb	XC6368A203MR	DC-DC-IC	PWM/PFM step-up, 2.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K2B	-	RP400N191B	DC-DC-IC	PWM step-up, 700kHz, 1.9V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2B	eb	XC6368A213MR	DC-DC-IC	PWM/PFM step-up, 2.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K2B	ek	XC6366A213MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K2C	-	RP400N201B	DC-DC-IC	PWM step-up, 700kHz, 2.0V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2C	eb	XC6368A223MR	DC-DC-IC	PWM/PFM step-up, 2.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K2C	ek	XC6366A223MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K2D	-	RP400N211B	DC-DC-IC	PWM step-up, 700kHz, 2.1V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2D	eb	XC6368A233MR	DC-DC-IC	PWM/PFM step-up, 2.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K2D	ek	XC6366A233MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K2E	-	RP400N221B	DC-DC-IC	PWM step-up, 700kHz, 2.2V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2E	eb	XC6368A243MR	DC-DC-IC	PWM/PFM step-up, 2.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K2E	ek	XC6366A243MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K2E	et	XC9302A243MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 2.4V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K2F	-	RP400N231B	DC-DC-IC	PWM step-up, 700kHz, 2.3V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2F	eb	XC6368A253MR	DC-DC-IC	PWM/PFM step-up, 2.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K2F	ek	XC6366A253MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K2F	et	XC9302A253MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 2.5V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K2G	-	RP400N241B	DC-DC-IC	PWM step-up, 700kHz, 2.4V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2H	-	RP400N251B	DC-DC-IC	PWM step-up, 700kHz, 2.5V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2H	eb	XC6368A263MR	DC-DC-IC	PWM/PFM step-up, 2.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K2H	ek	XC6366A263MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K2H	et	XC9302A263MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 2.6V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K2J	-	RP400N261B	DC-DC-IC	PWM step-up, 700kHz, 2.6V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2JAG	-	LR1121BG-2J-AF5-A	LVR-IC	LDO, 2.85V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K2JAL	-	LR1121BL-2J-AF5-A	LVR-IC	LDO, 2.85V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K2JBG	-	LR1121BG-2J-AF5-B	LVR-IC	LDO, 2.85V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K2JBL	-	LR1121BL-2J-AF5-B	LVR-IC	LDO, 2.85V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K2K	-	RP400N271B	DC-DC-IC	PWM st-up, 700kHz, 2.7V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2K	eb	XC6368A273MR	DC-DC-IC	PWM/PFM step-up, 2.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K2K	ek	XC6366A273MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K2K	et	XC9302A273MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 2.7V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K2L	-	RP400N281B	DC-DC-IC	PWM st-up, 700kHz, 2.8V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2L	eb	XC6368A283MR	DC-DC-IC	PWM/PFM step-up, 2.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K2L	ek	XC6366A283MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K2L	et	XC9302A283MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 2.8V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K2M	-	RP400N291B	DC-DC-IC	PWM st-up, 700kHz, 2.9V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2M	eb	XC6368A293MR	DC-DC-IC	PWM/PFM step-up, 2.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K2M	ek	XC6366A293MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K2M	et	XC9302A293MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 2.9V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K2N	-	RP400N301B	DC-DC-IC	PWM st-up, 700kHz, 3.0V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2P	-	RP400N311B	DC-DC-IC	PWM st-up, 700kHz, 3.1V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2Q	-	RP400N321B	DC-DC-IC	PWM st-up, 700kHz, 3.2V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2R	-	RP400N331B	DC-DC-IC	PWM st-up, 700kHz, 3.3V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2S	-	RP400N341B	DC-DC-IC	PWM st-up, 700kHz, 3.4V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2T	-	RP400N351B	DC-DC-IC	PWM st-up, 700kHz, 3.5V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2U	-	RP400N361B	DC-DC-IC	PWM st-up, 700kHz, 3.6V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2V	-	RP400N371B	DC-DC-IC	PWM st-up, 700kHz, 3.7V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2W	-	RP400N381B	DC-DC-IC	PWM st-up, 700kHz, 3.8V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2X	-	RP400N391B	DC-DC-IC	PWM st-up, 700kHz, 3.9V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2Y	-	RP400N401B	DC-DC-IC	PWM st-up, 700kHz, 4.0V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
K2Z	-	RP400N411B	DC-DC-IC	PWM st-up, 700kHz, 4.1V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
k3	-	BD46E435G-M	Vdet-IC	4.3V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
K3	-	ELM89333B	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
K3	-	RN5RG33AA	LVR-IC	Ext. transistor, 3.3V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
K3	-	RT9167A-18CBR	LVR-IC	LDO, 1.8V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
K3	ea	RN5RY231A	DC-DC-IC	VFM step-up, 2.3V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
K30	-	RP112N301B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K30	eb	XC6368A302MR	DC-DC-IC	PWM/PFM step-up, 3.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K30	ek	XC6366A302MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K30	et	XC9302A302MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 3.0V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K301	-	TSH70CLT	Op-IC	Wide-band LP, St-by, ±5V, 70MHz	SOT-23-5	28opa	OP1	6d	Ste
K30AG	-	LR1121BG-30-AF5-A	LVR-IC	LDO, 3.0V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K30AL	-	LR1121BL-30-AF5-A	LVR-IC	LDO, 3.0V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K30BG	-	LR1121BG-30-AF5-B	LVR-IC	LDO, 3.0V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K30BL	-	LR1121BL-30-AF5-B	LVR-IC	LDO, 3.0V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K31	-	RP112N311B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K31	eb	XC6368A312MR	DC-DC-IC	PWM/PFM step-up, 3.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K31	ek	XC6366A312MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K31	et	XC9302A312MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 3.1V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K31AG	-	LR1121BG-31-AF5-A	LVR-IC	LDO, 3.1V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K31AL	-	LR1121BL-31-AF5-A	LVR-IC	LDO, 3.1V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K31BG	-	LR1121BG-31-AF5-B	LVR-IC	LDO, 3.1V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K31BL	-	LR1121BL-31-AF5-B	LVR-IC	LDO, 3.1V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K32	-	RP112N321B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K32	eb	XC6368A322MR	DC-DC-IC	PWM/PFM step-up, 3.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K32	ek	XC6366A322MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K32	et	XC9302A322MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 3.2V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K32AG	-	LR1121BG-32-AF5-A	LVR-IC	LDO, 3.2V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K32AL	-	LR1121BL-32-AF5-A	LVR-IC	LDO, 3.2V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K32BG	-	LR1121BG-32-AF5-B	LVR-IC	LDO, 3.2V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K32BL	-	LR1121BL-32-AF5-B	LVR-IC	LDO, 3.2V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K33	-	RP112N331B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K33	eb	XC6368A332MR	DC-DC-IC	PWM/PFM step-up, 3.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K33	ek	XC6366A332MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K33	et	XC9302A332MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 3.3V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K33AG	-	LR1121BG-33-AF5-A	LVR-IC	LDO, 3.3V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K33AL	-	LR1121BL-33-AF5-A	LVR-IC	LDO, 3.3V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K33BG	-	LR1121BG-33-AF5-B	LVR-IC	LDO, 3.3V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K33BL	-	LR1121BL-33-AF5-B	LVR-IC	LDO, 3.3V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K34	-	RP112N341B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K34	eb	XC6368A342MR	DC-DC-IC	PWM/PFM step-up, 3.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K34	ek	XC6366A342MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K34	et	XC9302A342MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 3.4V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K34AG	-	LR1121BG-34-AF5-A	LVR-IC	LDO, 3.4V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K34AL	-	LR1121BL-34-AF5-A	LVR-IC	LDO, 3.4V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K34BG	-	LR1121BG-34-AF5-B	LVR-IC	LDO, 3.4V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K34BL	-	LR1121BL-34-AF5-B	LVR-IC	LDO, 3.4V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K35	-	RP112N351B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K35	eb	XC6368A352MR	DC-DC-IC	PWM/PFM step-up, 3.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K35	ek	XC6366A352MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K35	et	XC9302A352MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 3.5V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K35AG	-	LR1121BG-35-AF5-A	LVR-IC	LDO, 3.5V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K35AL	-	LR1121BL-35-AF5-A	LVR-IC	LDO, 3.5V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K35BG	-	LR1121BG-35-AF5-B	LVR-IC	LDO, 3.5V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K35BL	-	LR1121BL-35-AF5-B	LVR-IC	LDO, 3.5V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K36	-	RP112N361B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K36	eb	XC6368A362MR	DC-DC-IC	PWM/PFM step-up, 3.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K36	ek	XC6366A362MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K36	et	XC9302A362MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 3.6V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K36AG	-	LR1121BG-36-AF5-A	LVR-IC	LDO, 3.6V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K36AL	-	LR1121BL-36-AF5-A	LVR-IC	LDO, 3.6V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K36BG	-	LR1121BG-36-AF5-B	LVR-IC	LDO, 3.6V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K36BL	-	LR1121BL-36-AF5-B	LVR-IC	LDO, 3.6V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K37	-	RP112N371B	LVR-IC	LDO, 3.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K37	eb	XC6368A372MR	DC-DC-IC	PWM/PFM step-up, 3.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K37	ek	XC6366A372MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K37	et	XC9302A372MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 3.7V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K37AG	-	LR1121BG-37-AF5-A	LVR-IC	LDO, 3.7V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K37AL	-	LR1121BL-37-AF5-A	LVR-IC	LDO, 3.7V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K37BG	-	LR1121BG-37-AF5-B	LVR-IC	LDO, 3.7V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K37BL	-	LR1121BL-37-AF5-B	LVR-IC	LDO, 3.7V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K38	-	RP112N381B	LVR-IC	LDO, 3.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K38	eb	XC6368A382MR	DC-DC-IC	PWM/PFM step-up, 3.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K38	ek	XC6366A382MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K38	et	XC9302A382MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 3.8V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K38AG	-	LR1121BG-38-AF5-A	LVR-IC	LDO, 3.8V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K38AL	-	LR1121BL-38-AF5-A	LVR-IC	LDO, 3.8V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K38BG	-	LR1121BG-38-AF5-B	LVR-IC	LDO, 3.8V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K38BL	-	LR1121BL-38-AF5-B	LVR-IC	LDO, 3.8V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K39	-	RP112N391B	LVR-IC	LDO, 3.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K39	eb	XC6368A392MR	DC-DC-IC	PWM/PFM step-up, 3.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K39	ek	XC6366A392MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K39	et	XC9302A392MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 3.9V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K39AG	-	LR1121BG-39-AF5-A	LVR-IC	LDO, 3.9V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K39AL	-	LR1121BL-39-AF5-A	LVR-IC	LDO, 3.9V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K39BG	-	LR1121BG-39-AF5-B	LVR-IC	LDO, 3.9V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K39BL	-	LR1121BL-39-AF5-B	LVR-IC	LDO, 3.9V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K3A	eb	XC6368A303MR	DC-DC-IC	PWM/PFM step-up, 3.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K3A	ek	XC6366A303MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K3A	et	XC9302A303MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 3.0V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K3B	eb	XC6368A313MR	DC-DC-IC	PWM/PFM step-up, 3.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K3B	ek	XC6366A313MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K3B	et	XC9302A313MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 3.1V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K3C	eb	XC6368A323MR	DC-DC-IC	PWM/PFM step-up, 3.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K3C	ek	XC6366A323MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K3C	et	XC9302A323MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 3.2V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K3D	eb	XC6368A333MR	DC-DC-IC	PWM/PFM step-up, 3.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K3D	ek	XC6366A333MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K3D	et	XC9302A333MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 3.3V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K3E	eb	XC6368A343MR	DC-DC-IC	PWM/PFM step-up, 3.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K3E	ek	XC6366A343MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K3E	et	XC9302A343MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 3.4V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K3F	eb	XC6368A353MR	DC-DC-IC	PWM/PFM step-up, 3.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K3F	ek	XC6366A353MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K3F	et	XC9302A353MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 3.5V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K3H	eb	XC6368A363MR	DC-DC-IC	PWM/PFM step-up, 3.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K3H	ek	XC6366A363MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K3H	et	XC9302A363MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 3.6V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K3K	eb	XC6368A373MR	DC-DC-IC	PWM/PFM step-up, 3.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K3K	ek	XC6366A373MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K3K	et	XC9302A373MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 3.7V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K3L	eb	XC6368A383MR	DC-DC-IC	PWM/PFM step-up, 3.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K3L	ek	XC6366A383MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K3L	et	XC9302A383MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 3.8V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K3M	eb	XC6368A393MR	DC-DC-IC	PWM/PFM step-up, 3.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K3M	ek	XC6366A393MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K3M	et	XC9302A393MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 3.9V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
k4	-	BD46E445G-M	Vdet-IC	4.4V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
K4	-	ELM89343B	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
K4	-	RN5RG34AA	LVR-IC	Ext. transistor, 3.4V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
K4	-	RT9167A-19CBR	LVR-IC	LDO, 1.9V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
K4	ea	RN5RY241A	DC-DC-IC	VFM step-up, 2.4V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
K40	-	RP112N401B	LVR-IC	LDO, 4.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K40	eb	XC6368A402MR	DC-DC-IC	PWM/PFM step-up, 4.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K40	ek	XC6366A402MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K40	et	XC9302A402MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 4.0V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K40AG	-	LR1121BG-40-AF5-A	LVR-IC	LDO, 4.0V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K40AL	-	LR1121BL-40-AF5-A	LVR-IC	LDO, 4.0V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K40BG	-	LR1121BG-40-AF5-B	LVR-IC	LDO, 4.0V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K40BL	-	LR1121BL-40-AF5-B	LVR-IC	LDO, 4.0V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K41	-	RP112N411B	LVR-IC	LDO, 4.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K41	eb	XC6368A412MR	DC-DC-IC	PWM/PFM step-up, 4.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K41	ek	XC6366A412MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K41	et	XC9302A412MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 4.1V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K41AG	-	LR1121BG-41-AF5-A	LVR-IC	LDO, 4.1V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K41AL	-	LR1121BL-41-AF5-A	LVR-IC	LDO, 4.1V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K41BG	-	LR1121BG-41-AF5-B	LVR-IC	LDO, 4.1V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K41BL	-	LR1121BL-41-AF5-B	LVR-IC	LDO, 4.1V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K42	-	RP112N421B	LVR-IC	LDO, 4.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K42	eb	XC6368A422MR	DC-DC-IC	PWM/PFM step-up, 4.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K42	ek	XC6366A422MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K42	et	XC9302A422MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 4.2V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K42AG	-	LR1121BG-42-AF5-A	LVR-IC	LDO, 4.2V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K42AL	-	LR1121BL-42-AF5-A	LVR-IC	LDO, 4.2V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K42BG	-	LR1121BG-42-AF5-B	LVR-IC	LDO, 4.2V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K42BL	-	LR1121BL-42-AF5-B	LVR-IC	LDO, 4.2V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K43	-	RP112N431B	LVR-IC	LDO, 4.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K43	eb	XC6368A432MR	DC-DC-IC	PWM/PFM step-up, 4.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K43	ek	XC6366A432MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K43	et	XC9302A432MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 4.3V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K43AG	-	LR1121BG-43-AF5-A	LVR-IC	LDO, 4.3V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K43AL	-	LR1121BL-43-AF5-A	LVR-IC	LDO, 4.3V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K43BG	-	LR1121BG-43-AF5-B	LVR-IC	LDO, 4.3V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K43BL	-	LR1121BL-43-AF5-B	LVR-IC	LDO, 4.3V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K44	-	RP112N441B	LVR-IC	LDO, 4.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K44	eb	XC6368A442MR	DC-DC-IC	PWM/PFM step-up, 4.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K44	ek	XC6366A442MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K44	et	XC9302A442MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 4.4V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K44AG	-	LR1121BG-44-AF5-A	LVR-IC	LDO, 4.4V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K44AL	-	LR1121BL-44-AF5-A	LVR-IC	LDO, 4.4V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K44BG	-	LR1121BG-44-AF5-B	LVR-IC	LDO, 4.4V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K44BL	-	LR1121BL-44-AF5-B	LVR-IC	LDO, 4.4V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K45	-	RP112N451B	LVR-IC	LDO, 4.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K45	eb	XC6368A452MR	DC-DC-IC	PWM/PFM step-up, 4.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K45	ek	XC6366A452MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K45	et	XC9302A452MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 4.5V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K45AG	-	LR1121BG-45-AF5-A	LVR-IC	LDO, 4.5V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K45AL	-	LR1121BL-45-AF5-A	LVR-IC	LDO, 4.5V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K45BG	-	LR1121BG-45-AF5-B	LVR-IC	LDO, 4.5V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K45BL	-	LR1121BL-45-AF5-B	LVR-IC	LDO, 4.5V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K46	-	RP112N461B	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K46	eb	XC6368A462MR	DC-DC-IC	PWM/PFM step-up, 4.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K46	ek	XC6366A462MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K46	et	XC9302A462MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 4.6V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K46AG	-	LR1121BG-46-AF5-A	LVR-IC	LDO, 4.6V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K46AL	-	LR1121BL-46-AF5-A	LVR-IC	LDO, 4.6V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K46BG	-	LR1121BG-46-AF5-B	LVR-IC	LDO, 4.6V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K46BL	-	LR1121BL-46-AF5-B	LVR-IC	LDO, 4.6V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K47	-	RP112N471B	LVR-IC	LDO, 4.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K47	eb	XC6368A472MR	DC-DC-IC	PWM/PFM step-up, 4.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K47	ek	XC6366A472MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K47	et	XC9302A472MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 4.7V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K47AG	-	LR1121BG-47-AF5-A	LVR-IC	LDO, 4.7V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K47AL	-	LR1121BL-47-AF5-A	LVR-IC	LDO, 4.7V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K47BG	-	LR1121BG-47-AF5-B	LVR-IC	LDO, 4.7V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K47BL	-	LR1121BL-47-AF5-B	LVR-IC	LDO, 4.7V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K48	-	RP112N481B	LVR-IC	LDO, 4.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K48	eb	XC6368A482MR	DC-DC-IC	PWM/PFM step-up, 4.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K48	ek	XC6366A482MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K48	et	XC9302A482MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 4.8V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K48AG	-	LR1121BG-48-AF5-A	LVR-IC	LDO, 4.8V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K48AL	-	LR1121BL-48-AF5-A	LVR-IC	LDO, 4.8V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K48BG	-	LR1121BG-48-AF5-B	LVR-IC	LDO, 4.8V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K48BL	-	LR1121BL-48-AF5-B	LVR-IC	LDO, 4.8V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K49	eb	XC6368A492MR	DC-DC-IC	PWM/PFM step-up, 4.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K49	ek	XC6366A492MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K49	et	XC9302A492MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 4.9V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K49AG	-	LR1121BG-49-AF5-A	LVR-IC	LDO, 4.9V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K49AL	-	LR1121BL-49-AF5-A	LVR-IC	LDO, 4.9V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K49BG	-	LR1121BG-49-AF5-B	LVR-IC	LDO, 4.9V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K49BL	-	LR1121BL-49-AF5-B	LVR-IC	LDO, 4.9V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K4A	eb	XC6368A403MR	DC-DC-IC	PWM/PFM step-up, 4.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K4A	ek	XC6366A403MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K4A	et	XC9302A403MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 4.0V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K4B	eb	XC6368A413MR	DC-DC-IC	PWM/PFM step-up, 4.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K4B	ek	XC6366A413MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K4B	et	XC9302A413MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 4.1V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K4C	eb	XC6368A423MR	DC-DC-IC	PWM/PFM step-up, 4.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K4C	ek	XC6366A423MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K4C	et	XC9302A423MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 4.2V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K4D	eb	XC6368A433MR	DC-DC-IC	PWM/PFM step-up, 4.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K4D	ek	XC6366A433MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K4D	et	XC9302A433MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 4.3V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K4E	eb	XC6368A443MR	DC-DC-IC	PWM/PFM step-up, 4.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K4E	ek	XC6366A443MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K4E	et	XC9302A443MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 4.4V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K4F	eb	XC6368A453MR	DC-DC-IC	PWM/PFM step-up, 4.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K4F	ek	XC6366A453MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K4F	et	XC9302A453MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 4.5V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K4H	eb	XC6368A463MR	DC-DC-IC	PWM/PFM step-up, 4.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K4H	ek	XC6366A463MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K4H	et	XC9302A463MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 4.6V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K4K	eb	XC6368A473MR	DC-DC-IC	PWM/PFM step-up, 4.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K4K	ek	XC6366A473MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K4K	et	XC9302A473MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 4.7V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K4L	eb	XC6368A483MR	DC-DC-IC	PWM/PFM step-up, 4.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K4L	ek	XC6366A483MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K4L	et	XC9302A483MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 4.8V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K4M	eb	XC6368A493MR	DC-DC-IC	PWM/PFM step-up, 4.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K4M	ek	XC6366A493MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K4M	et	XC9302A493MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 4.9V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
k5	-	BD46E455G-M	Vdet-IC	4.5V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
K5	-	ELM89353B	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
K5	-	R1111N151B	LVR-IC	LDO, Low noise, 1.5V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K5	-	RN5RG35AA	LVR-IC	Ext. transistor, 3.5V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K5	-	RT9167A-20CBR	LVR-IC	LDO, 2.0V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
K5	ea	RN5RY251A	DC-DC-IC	VFM step-up, 2.5V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
K50	eb	XC6368A502MR	DC-DC-IC	PWM/PFM step-up, 5.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K50	ek	XC6366A502MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K50	et	XC9302A502MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 5.0V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K50AG	-	LR1121BG-50-AF5-A	LVR-IC	LDO, 5.0V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K50AL	-	LR1121BL-50-AF5-A	LVR-IC	LDO, 5.0V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K50BG	-	LR1121BG-50-AF5-B	LVR-IC	LDO, 5.0V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K50BL	-	LR1121BL-50-AF5-B	LVR-IC	LDO, 5.0V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K51	eb	XC6368A512MR	DC-DC-IC	PWM/PFM step-up, 5.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K51	ek	XC6366A512MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K51	et	XC9302A512MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 5.1V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K51AG	-	LR1121BG-51-AF5-A	LVR-IC	LDO, 5.1V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K51AL	-	LR1121BL-51-AF5-A	LVR-IC	LDO, 5.1V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K51BG	-	LR1121BG-51-AF5-B	LVR-IC	LDO, 5.1V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K51BL	-	LR1121BL-51-AF5-B	LVR-IC	LDO, 5.1V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K52	eb	XC6368A522MR	DC-DC-IC	PWM/PFM step-up, 5.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K52	ek	XC6366A522MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K52	et	XC9302A522MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 5.2V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K52AG	-	LR1121BG-52-AF5-A	LVR-IC	LDO, 5.2V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K52AL	-	LR1121BL-52-AF5-A	LVR-IC	LDO, 5.2V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K52BG	-	LR1121BG-52-AF5-B	LVR-IC	LDO, 5.2V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K52BL	-	LR1121BL-52-AF5-B	LVR-IC	LDO, 5.2V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K53	eb	XC6368A532MR	DC-DC-IC	PWM/PFM step-up, 5.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K53	ek	XC6366A532MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K53	et	XC9302A532MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 5.3V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K53AG	-	LR1121BG-53-AF5-A	LVR-IC	LDO, 5.3V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K53AL	-	LR1121BL-53-AF5-A	LVR-IC	LDO, 5.3V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K53BG	-	LR1121BG-53-AF5-B	LVR-IC	LDO, 5.3V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K53BL	-	LR1121BL-53-AF5-B	LVR-IC	LDO, 5.3V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K54	eb	XC6368A542MR	DC-DC-IC	PWM/PFM step-up, 5.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K54	ek	XC6366A542MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K54	et	XC9302A542MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 5.4V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K54AG	-	LR1121BG-54-AF5-A	LVR-IC	LDO, 5.4V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K54AL	-	LR1121BL-54-AF5-A	LVR-IC	LDO, 5.4V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K54BG	-	LR1121BG-54-AF5-B	LVR-IC	LDO, 5.4V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K54BL	-	LR1121BL-54-AF5-B	LVR-IC	LDO, 5.4V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K55	eb	XC6368A552MR	DC-DC-IC	PWM/PFM step-up, 5.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K55	ek	XC6366A552MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K55	et	XC9302A552MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 5.5V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K55AG	-	LR1121BG-55-AF5-A	LVR-IC	LDO, 5.5V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K55AL	-	LR1121BL-55-AF5-A	LVR-IC	LDO, 5.5V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K55BG	-	LR1121BG-55-AF5-B	LVR-IC	LDO, 5.5V±2%, 200mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
K55BL	-	LR1121BL-55-AF5-B	LVR-IC	LDO, 5.5V±2%, 200mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
K56	eb	XC6368A562MR	DC-DC-IC	PWM/PFM step-up, 5.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K56	ek	XC6366A562MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K56	et	XC9302A562MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 5.6V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K57	eb	XC6368A572MR	DC-DC-IC	PWM/PFM step-up, 5.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K57	ek	XC6366A572MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K57	et	XC9302A572MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 5.7V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K58	eb	XC6368A582MR	DC-DC-IC	PWM/PFM step-up, 5.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K58	ek	XC6366A582MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K58	et	XC9302A582MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 5.8V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K59	eb	XC6368A592MR	DC-DC-IC	PWM/PFM step-up, 5.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K59	ek	XC6366A592MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K59	et	XC9302A592MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 5.9V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K5A	eb	XC6368A503MR	DC-DC-IC	PWM/PFM step-up, 5.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K5A	ek	XC6366A503MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K5A	et	XC9302A503MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 5.0V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K5B	eb	XC6368A513MR	DC-DC-IC	PWM/PFM step-up, 5.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K5B	ek	XC6366A513MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K5B	et	XC9302A513MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 5.1V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K5C	eb	XC6368A523MR	DC-DC-IC	PWM/PFM step-up, 5.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K5C	ek	XC6366A523MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K5C	et	XC9302A523MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 5.2V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K5D	eb	XC6368A533MR	DC-DC-IC	PWM/PFM step-up, 5.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K5D	ek	XC6366A533MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K5D	et	XC9302A533MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 5.3V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K5E	eb	XC6368A543MR	DC-DC-IC	PWM/PFM step-up, 5.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K5E	ek	XC6366A543MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K5E	et	XC9302A543MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 5.4V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K5F	eb	XC6368A553MR	DC-DC-IC	PWM/PFM step-up, 5.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K5F	ek	XC6366A553MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K5F	et	XC9302A553MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 5.5V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K5H	eb	XC6368A563MR	DC-DC-IC	PWM/PFM step-up, 5.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K5H	ek	XC6366A563MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K5H	et	XC9302A563MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 5.6V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K5K	eb	XC6368A573MR	DC-DC-IC	PWM/PFM step-up, 5.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K5K	ek	XC6366A573MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K5K	et	XC9302A573MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 5.7V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K5L	eb	XC6368A583MR	DC-DC-IC	PWM/PFM step-up, 5.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K5L	ek	XC6366A583MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K5L	et	XC9302A583MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 5.8V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K5M	eb	XC6368A593MR	DC-DC-IC	PWM/PFM step-up, 5.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K5M	ek	XC6366A593MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K5M	et	XC9302A593MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 5.9V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
k6	-	BD46E465G-M	Vdet-IC	4.6V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
K6	-	ELM89363B	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
K6	-	R1111N161B	LVR-IC	LDO, Low noise, 1.6V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K6	-	RN5RG36AA	LVR-IC	Ext. transistor, 3.6V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
K6	-	RT9167A-21CBR	LVR-IC	LDO, 2.1V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
K6	ea	RN5RY261A	DC-DC-IC	VFM step-up, 2.6V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
K60	eb	XC6368A602MR	DC-DC-IC	PWM/PFM step-up, 6.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K60	ek	XC6366A602MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 6.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K60	et	XC9302A602MR	DC-DC-IC	PWM/PFM step-up/down, 180kHz, 6.0V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K61	eb	XC6368A612MR	DC-DC-IC	PWM/PFM step-up, 6.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K62	eb	XC6368A622MR	DC-DC-IC	PWM/PFM step-up, 6.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K63	eb	XC6368A632MR	DC-DC-IC	PWM/PFM step-up, 6.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K64	eb	XC6368A642MR	DC-DC-IC	PWM/PFM step-up, 6.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K65	eb	XC6368A652MR	DC-DC-IC	PWM/PFM step-up, 6.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K6A	eb	XC6368A603MR	DC-DC-IC	PWM/PFM step-up, 6.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K6A	ek	XC6366A603MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 6.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
K6A	et	XC9302A603MR	DC-DC-IC	PWM/PFM step-up/down, 300kHz, 6.0V±2.5%, 250mA, +CE	SOT-25	28dc8	DC14	6g	Tor
K6B	eb	XC6368A613MR	DC-DC-IC	PWM/PFM step-up, 6.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K6C	eb	XC6368A623MR	DC-DC-IC	PWM/PFM step-up, 6.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K6D	eb	XC6368A633MR	DC-DC-IC	PWM/PFM step-up, 6.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K6E	eb	XC6368A643MR	DC-DC-IC	PWM/PFM step-up, 6.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
K6F	eb	XC6368A653MR	DC-DC-IC	PWM/PFM step-up, 6.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sh	DC11	6g	Tor
k7	-	BD46E475G-M	Vdet-IC	4.7V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
K7	-	ELM89373B	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
K7	-	R1111N171B	LVR-IC	LDO, Low noise, 1.7V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K7	-	RN5RG37AA	LVR-IC	Ext. transistor, 3.7V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
K7	-	RT9167A-22CBR	LVR-IC	LDO, 2.2V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
K7	ea	RN5RY271A	DC-DC-IC	VFM step-up, 2.7V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
k8	-	BD46E485G-M	Vdet-IC	4.8V±1%, -MR, -Reset PPO, Td=50ms	SSOP-5	28vdp	VD5	6c	Rhm
K8	-	ELM89383B	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
K8	-	MC78PC18N	LVR-IC	LDO, LN, +CE, 1.8V±2.5%, 100mA	SOT-23-5	28cx	VR4	6b	Ons
K8	-	R1111N181B	LVR-IC	LDO, Low noise, 1.8V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K8	-	RN5RG38AA	LVR-IC	Ext. transistor, 3.8V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
K8	-	RT9167A-23CBR	LVR-IC	LDO, 2.3V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
K8	ea	RN5RY281A	DC-DC-IC	VFM step-up, 2.8V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
K8A	-	XC6108N08AMR	Vdet-IC	0.8V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
K8B	-	XC6108N08BMR	Vdet-IC	0.8V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
K8C	-	XC6108N08CMR	Vdet-IC	0.8V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
K8D	-	XC6108N08DMR	Vdet-IC	0.8V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
k9	-	BD46E231G-M	Vdet-IC	2.3V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
K9	-	ELM89393B	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
K9	-	R1111N191B	LVR-IC	LDO, Low noise, 1.9V±2%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
K9	-	RN5RG39AA	LVR-IC	Ext. transistor, 3.9V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
K9	-	RT9167A-24CBR	LVR-IC	LDO, 2.4V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
K9	ea	RN5RY291A	DC-DC-IC	VFM step-up, 2.9V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
K9A	-	XC6108N09AMR	Vdet-IC	0.9V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
K9B	-	XC6108N09BMR	Vdet-IC	0.9V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
K9C	-	XC6108N09CMR	Vdet-IC	0.9V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
K9D	-	XC6108N09DMR	Vdet-IC	0.9V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
KA	-	BU4917FWE	Vdet-IC	1.7V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KA	-	BU4917G	Vdet-IC	1.7V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KA	-	RT9167A-25CBR	LVR-IC	LDO, 2.5V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
KA	-	TC6503N015VCT	Tdet-IC	-15°C±0.5°C, -Tunder ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
KA0	ej	XC6124D330MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KA0	fe	XC6124C730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KA1	ej	XC6124D331MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KA1	fe	XC6124C731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KA2	ej	XC6124D332MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KA2	fe	XC6124C732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KA3	ej	XC6124D333MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KA3	fe	XC6124C733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KA4	-	MMBD4448HCQW	Si-diode	Quad, Sw, Fast, 75V, 500mA, Vf<1.25V(150mA), <4ns	SOT-353	30bh	-	6l	Di
KA4	ej	XC6124D334MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KA4	fe	XC6124C734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KA5	-	MMBD4448HAQW	Si-diode	Quad, Sw, Fast, 75V, 500mA, Vf<1.25V(150mA), <4ns	SOT-353	30	D16	6l	Di
KA5	ej	XC6124D335MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KA5	fe	XC6124C735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KA6	ej	XC6124D336MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KA6	fe	XC6124C736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KA7	ej	XC6124D337MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KA7	fe	XC6124C737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KA8	-	XC9235C08CMR-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KA8	ej	XC6124D338MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KA8	fe	XC6124C738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KA9	-	XC9235C09CMR-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KA9	ej	XC6124D339MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KA9	fe	XC6124C739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAA	-	RP171N331B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAA	ej	XC6124D340MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAA	fe	XC6124C740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAB	-	RP171N341B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAB	ej	XC6124D341MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAB	fe	XC6124C741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAC	-	RP171N351B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAC	ej	XC6124D342MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAC	fe	XC6124C742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAD	-	RP171N361B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAD	ej	XC6124D343MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAD	fe	XC6124C743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAE	-	RP171N371B	LVR-IC	LDO, 3.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAE	ej	XC6124D344MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAE	fe	XC6124C744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAF	-	RP171N381B	LVR-IC	LDO, 3.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAF	ej	XC6124D345MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAF	fe	XC6124C745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAG	-	RP171N391B	LVR-IC	LDO, 3.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAH	-	RP171N401B	LVR-IC	LDO, 4.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAH	ec	XC6124D316MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAH	ej	XC6124D346MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAH	em	XC6124C716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAH	fe	XC6124C746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAJ	-	RP171N411B	LVR-IC	LDO, 4.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAK	-	RP171N421B	LVR-IC	LDO, 4.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAK	ec	XC6124D317MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAK	ej	XC6124D347MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAK	em	XC6124C717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAK	fe	XC6124C747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAL	-	RP171N431B	LVR-IC	LDO, 4.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAL	-	XC9235C0LCMR-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KAL	ec	XC6124D318MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAL	ej	XC6124D348MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAL	em	XC6124C718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAL	fe	XC6124C748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAM	-	RP171N441B	LVR-IC	LDO, 4.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAM	-	XC9235C0MCMR-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KAM	ec	XC6124D319MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAM	ej	XC6124D349MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAM	em	XC6124C719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAM	fe	XC6124C749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAN	-	RP171N451B	LVR-IC	LDO, 4.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAN	ec	XC6124D320MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAN	ej	XC6124D350MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAN	em	XC6124C720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAN	fe	XC6124C750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KAP	-	RP171N461B	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAP	ec	XC6124D321MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAP	em	XC6124C721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAQ	-	RP171N471B	LVR-IC	LDO, 4.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAR	-	RP171N481B	LVR-IC	LDO, 4.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAR	ec	XC6124D322MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAR	em	XC6124C722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAS	-	RP171N491B	LVR-IC	LDO, 4.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAS	ec	XC6124D323MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAS	em	XC6124C723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAT	-	RP171N501B	LVR-IC	LDO, 5.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAT	ec	XC6124D324MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAT	em	XC6124C724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAU	-	RP171N511B	LVR-IC	LDO, 5.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAU	ec	XC6124D325MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAU	em	XC6124C725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAV	-	RP171N521B	LVR-IC	LDO, 5.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAV	ec	XC6124D326MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAV	em	XC6124C726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAW	-	RP171N531B	LVR-IC	LDO, 5.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAX	-	RP171N541B	LVR-IC	LDO, 5.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAX	ec	XC6124D327MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAX	em	XC6124C727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAY	-	RP171N551B	LVR-IC	LDO, 5.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAY	ec	XC6124D328MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAY	em	XC6124C728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KAZ	-	RP171N561B	LVR-IC	LDO, 5.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KAZ	ec	XC6124D329MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KAZ	em	XC6124C729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KB	-	BU4918FWE	Vdet-IC	1.8V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KB	-	BU4918G	Vdet-IC	1.8V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KB	-	RT9167A-26CBR	LVR-IC	LDO, 2.6V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
KB	-	TC6503P005VCT	Tdet-IC	5°C±0.5°C, -Tunder ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
KB0	-	XC9235C10CMR-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KB0	ej	XC6124D530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KB0	fe	XC6124C630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KB1	-	XC9235C11CMR-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KB1	ej	XC6124D531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KB1	fe	XC6124C631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KB2	-	XC9235C12CMR-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KB2	ej	XC6124D532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KB2	fe	XC6124C632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KB25	fb	MIC5205-2.5YM5	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, Pb. Free	SOT-23-5	28vrx	VR7	6g	Mcr
KB27	fb	MIC5205-2.7YM5	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, Pb. Free	SOT-23-5	28vrx	VR7	6g	Mcr
KB28	fb	MIC5205-2.8YM5	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, Pb. Free	SOT-23-5	28vrx	VR7	6g	Mcr
KB29	fb	MIC5205-2.9YM5	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, Pb. Free	SOT-23-5	28vrx	VR7	6g	Mcr
KB2J	fb	MIC5205-2.85YM5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, Pb. Free	SOT-23-5	28vrx	VR7	6g	Mcr
KB3	-	XC9235C13CMR-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KB3	ej	XC6124D533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KB3	fe	XC6124C633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KB30	fb	MIC5205-3.0YM5	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, Pb. Free	SOT-23-5	28vrx	VR7	6g	Mcr
KB31	fb	MIC5205-3.1YM5	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, Pb. Free	SOT-23-5	28vrx	VR7	6g	Mcr
KB32	fb	MIC5205-3.2YM5	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, Pb. Free	SOT-23-5	28vrx	VR7	6g	Mcr
KB33	fb	MIC5205-3.3YM5	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, Pb. Free	SOT-23-5	28vrx	VR7	6g	Mcr
KB36	fb	MIC5205-3.6YM5	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, Pb. Free	SOT-23-5	28vrx	VR7	6g	Mcr
KB38	fb	MIC5205-3.8YM5	LVR-IC	LDO, 3.8V±1%, 150mA, +CE, Pb. Free	SOT-23-5	28vrx	VR7	6g	Mcr
KB4	-	XC9235C14CMR-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KB4	ej	XC6124D534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KB4	fe	XC6124C634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KB40	fb	MIC5205-4.0YM5	LVR-IC	LDO, 4.0V±1%, 150mA, +CE, Pb. Free	SOT-23-5	28vrx	VR7	6g	Mcr
KB5	-	XC9235C15CMR-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KB5	eb	XC6368A151MR	DC-DC-IC	PWM/PFM step-up, 1.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KB5	ej	XC6124D535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KB5	ek	XC6366A151MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KB5	fe	XC6124C635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KB50	fb	MIC5205-5.0YM5	LVR-IC	LDO, 5.0V±1%, 150mA, +CE, Pb. Free	SOT-23-5	28vrx	VR7	6g	Mcr
KB6	-	XC9235C16CMR-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KB6	eb	XC6368A161MR	DC-DC-IC	PWM/PFM step-up, 1.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KB6	ej	XC6124D536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KB6	ek	XC6366A161MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KB6	fe	XC6124C636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KB7	-	XC9235C17CMR-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KB7	eb	XC6368A171MR	DC-DC-IC	PWM/PFM step-up, 1.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KB7	ej	XC6124D537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KB7	ek	XC6366A171MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KB7	fe	XC6124C637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KB8	-	XC9235C18CMR-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KB8	eb	XC6368A181MR	DC-DC-IC	PWM/PFM step-up, 1.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KB8	ej	XC6124D538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KB8	ek	XC6366A181MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KB8	fe	XC6124C638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KB9	-	XC9235C19CMR-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KB9	eb	XC6368A191MR	DC-DC-IC	PWM/PFM step-up, 1.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KB9	ej	XC6124D539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KB9	ek	XC6366A191MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KB9	fe	XC6124C639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBA	-	RP171N331D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBA	-	XC9235C1ACMR-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KBA	ej	XC6124D540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBA	fe	XC6124C640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBAA	-	MIC5205YM5	LVR-IC	LDO, Adj. 2.5..10V±1%, 150mA, +CE, Pb. Free	SOT-23-5	28vrx	VR16	6g	Mcr
KBB	-	RP171N341D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBB	-	XC9235C1BCMR-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KBB	ej	XC6124D541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBB	fe	XC6124C641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBC	-	RP171N351D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBC	-	XC9235C1CCMR-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KBC	ej	XC6124D542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBC	fe	XC6124C642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBD	-	RP171N361D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBD	-	XC9235C1DCMR-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KBD	ej	XC6124D543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBD	fe	XC6124C643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBE	-	RP171N371D	LVR-IC	LDO, 3.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBE	-	XC9235C1ECMR-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KBE	ej	XC6124D544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBE	fe	XC6124C644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBF	-	RP171N381D	LVR-IC	LDO, 3.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBF	-	XC9235C1FCMR-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KBF	eb	XC6368A155MR	DC-DC-IC	PWM/PFM step-up, 1.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KBF	ej	XC6124D545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBF	ek	XC6366A155MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KBF	fe	XC6124C645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBG	-	RP171N391D	LVR-IC	LDO, 3.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBH	-	RP171N401D	LVR-IC	LDO, 4.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBH	-	XC9235C1HCMR-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KBH	eb	XC6368A165MR	DC-DC-IC	PWM/PFM step-up, 1.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KBH	ec	XC6124D516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBH	ej	XC6124D546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBH	ek	XC6366A165MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KBH	em	XC6124C616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBH	fe	XC6124C646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBJ	-	RP171N411D	LVR-IC	LDO, 4.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBK	-	RP171N421D	LVR-IC	LDO, 4.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBK	-	XC9235C1KCMR-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KBK	eb	XC6368A175MR	DC-DC-IC	PWM/PFM step-up, 1.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KBK	ec	XC6124D517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBK	ej	XC6124D547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBK	ek	XC6366A175MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KBK	em	XC6124C617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBK	fe	XC6124C647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBL	-	RP171N431D	LVR-IC	LDO, 4.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBL	-	XC9235C1LCMR-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KBL	eb	XC6368A185MR	DC-DC-IC	PWM/PFM step-up, 1.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KBL	ec	XC6124D518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBL	ej	XC6124D548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBL	ek	XC6366A185MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KBL	em	XC6124C618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBL	fe	XC6124C648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBM	-	RP171N441D	LVR-IC	LDO, 4.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KBM	-	XC9235C1MCMR-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KBM	eb	XC6368A195MR	DC-DC-IC	PWM/PFM step-up, 1.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KBM	ec	XC6124D519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBM	ej	XC6124D549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBM	ek	XC6366A195MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KBM	em	XC6124C619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBM	fe	XC6124C649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBN	-	RP171N451D	LVR-IC	LDO, 4.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBN	ec	XC6124D520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBN	ej	XC6124D550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBN	em	XC6124C620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBN	fe	XC6124C650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBP	-	RP171N461D	LVR-IC	LDO, 4.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBP	ec	XC6124D521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBP	em	XC6124C621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBQ	-	RP171N471D	LVR-IC	LDO, 4.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBR	-	RP171N481D	LVR-IC	LDO, 4.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBR	ec	XC6124D522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBR	em	XC6124C622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBS	-	RP171N491D	LVR-IC	LDO, 4.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBS	ec	XC6124D523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBS	em	XC6124C623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBT	-	RP171N501D	LVR-IC	LDO, 5.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBT	ec	XC6124D524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBT	em	XC6124C624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBU	-	RP171N511D	LVR-IC	LDO, 5.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBU	ec	XC6124D525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBU	em	XC6124C625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBV	-	RP171N521D	LVR-IC	LDO, 5.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBV	ec	XC6124D526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBV	em	XC6124C626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBW	-	RP171N531D	LVR-IC	LDO, 5.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBX	-	RP171N541D	LVR-IC	LDO, 5.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBX	ec	XC6124D527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBX	em	XC6124C627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBY	-	RP171N551D	LVR-IC	LDO, 5.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBY	ec	XC6124D528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBY	em	XC6124C628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KBZ	-	RP171N561D	LVR-IC	LDO, 5.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
KBZ	ec	XC6124D529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KBZ	em	XC6124C629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KC	-	BU4919FWE	Vdet-IC	1.9V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KC	-	BU4919G	Vdet-IC	1.9V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KC	-	RT9167A-27CBR	LVR-IC	LDO, 2.7V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
KC0	-	XC9235C20CMR-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KC0	eb	XC6368A201MR	DC-DC-IC	PWM/PFM step-up, 2.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KC0	ej	XC6124D630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC0	ek	XC6366A201MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KC0	fe	XC6124D430MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC1	-	XC9235C21CMR-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KC1	eb	XC6368A211MR	DC-DC-IC	PWM/PFM step-up, 2.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KC1	ej	XC6124D631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC1	ek	XC6366A211MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KC1	fe	XC6124D431MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC2	-	XC9235C22CMR-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KC2	eb	XC6368A221MR	DC-DC-IC	PWM/PFM step-up, 2.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KC2	ej	XC6124D632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC2	ek	XC6366A221MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KC2	fe	XC6124D432MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC3	-	XC9235C23CMR-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KC3	eb	XC6368A231MR	DC-DC-IC	PWM/PFM step-up, 2.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KC3	ej	XC6124D633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC3	ek	XC6366A231MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KC3	fe	XC6124D433MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC4	-	XC9235C24CMR-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KC4	eb	XC6368A241MR	DC-DC-IC	PWM/PFM step-up, 2.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KC4	ej	XC6124D634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC4	ek	XC6366A241MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KC4	fe	XC6124D434MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC5	-	XC9235C25CMR-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KC5	eb	XC6368A251MR	DC-DC-IC	PWM/PFM step-up, 2.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KC5	ej	XC6124D635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC5	ek	XC6366A251MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KC5	fe	XC6124D435MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC6	-	XC9235C26CMR-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KC6	eb	XC6368A261MR	DC-DC-IC	PWM/PFM step-up, 2.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KC6	ej	XC6124D636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC6	ek	XC6366A261MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KC6	fe	XC6124D436MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC7	-	XC9235C27CMR-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KC7	eb	XC6368A271MR	DC-DC-IC	PWM/PFM step-up, 2.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KC7	ej	XC6124D637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC7	ek	XC6366A271MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KC7	fe	XC6124D437MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC8	-	XC9235C28CMR-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KC8	eb	XC6368A281MR	DC-DC-IC	PWM/PFM step-up, 2.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KC8	ej	XC6124D638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC8	ek	XC6366A281MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KC8	fe	XC6124D438MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC9	-	XC9235C29CMR-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KC9	eb	XC6368A291MR	DC-DC-IC	PWM/PFM step-up, 2.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KC9	ej	XC6124D639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KC9	ek	XC6366A291MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KC9	fe	XC6124D439MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCA	-	XC9235C2ACMR-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KCA	eb	XC6368A205MR	DC-DC-IC	PWM/PFM step-up, 2.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KCA	ej	XC6124D640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCA	ek	XC6366A205MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KCA	fe	XC6124D440MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCB	-	XC9235C2BCMR-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KCB	eb	XC6368A215MR	DC-DC-IC	PWM/PFM step-up, 2.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KCB	ej	XC6124D641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCB	ek	XC6366A215MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KCB	fe	XC6124D441MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCC	-	XC9235C2CCMR-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KCC	eb	XC6368A225MR	DC-DC-IC	PWM/PFM step-up, 2.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KCC	ej	XC6124D642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCC	ek	XC6366A225MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KCC	fe	XC6124D442MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCD	-	XC9235C2DCMR-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KCD	eb	XC6368A235MR	DC-DC-IC	PWM/PFM step-up, 2.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KCD	ej	XC6124D643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCD	ek	XC6366A235MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KCD	fe	XC6124D443MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCE	-	XC9235C2ECMR-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KCE	eb	XC6368A245MR	DC-DC-IC	PWM/PFM step-up, 2.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KCE	ej	XC6124D644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCE	ek	XC6366A245MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KCE	fe	XC6124D444MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCF	-	XC9235C2FCMR-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KCF	eb	XC6368A255MR	DC-DC-IC	PWM/PFM step-up, 2.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KCF	ej	XC6124D645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCF	ek	XC6366A255MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KCF	fe	XC6124D445MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCH	-	XC9235C2HCMR-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KCH	eb	XC6368A265MR	DC-DC-IC	PWM/PFM step-up, 2.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KCH	ec	XC6124D616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCH	ej	XC6124D646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCH	ek	XC6366A265MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KCH	em	XC6124D416MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCH	fe	XC6124D446MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCK	-	XC9235C2KCMR-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KCK	eb	XC6368A275MR	DC-DC-IC	PWM/PFM step-up, 2.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KCK	ec	XC6124D617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCK	ej	XC6124D647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCK	ek	XC6366A275MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KCK	em	XC6124D417MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCK	fe	XC6124D447MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCL	-	XC9235C2LCMR-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KCL	eb	XC6368A285MR	DC-DC-IC	PWM/PFM step-up, 2.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KCL	ec	XC6124D618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCL	ej	XC6124D648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCL	ek	XC6366A285MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KCL	em	XC6124D418MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCL	fe	XC6124D448MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCM	-	XC9235C2MCMR-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KCM	eb	XC6368A295MR	DC-DC-IC	PWM/PFM step-up, 2.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KCM	ec	XC6124D619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCM	ej	XC6124D649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCM	ek	XC6366A295MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KCM	em	XC6124D419MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCM	fe	XC6124D449MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCN	ec	XC6124D620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCN	ej	XC6124D650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCN	em	XC6124D420MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCN	fe	XC6124D450MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCP	ec	XC6124D621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCP	em	XC6124D421MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCR	ec	XC6124D622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCR	em	XC6124D422MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCS	ec	XC6124D623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCS	em	XC6124D423MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCT	ec	XC6124D624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCT	em	XC6124D424MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCU	ec	XC6124D625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCU	em	XC6124D425MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCV	ec	XC6124D626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCV	em	XC6124D426MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCX	ec	XC6124D627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCX	em	XC6124D427MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCY	ec	XC6124D628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCY	em	XC6124D428MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCZ	ec	XC6124D629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KCZ	em	XC6124D429MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KD	-	BU4920FWE	Vdet-IC	2.0V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KD	-	BU4920G	Vdet-IC	2.0V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KD	-	RT9167A-28CBR	LVR-IC	LDO, 2.8V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
KD0	-	XC9235C30CMR-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KD0	eb	XC6368A301MR	DC-DC-IC	PWM/PFM step-up, 3.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KD0	ej	XC6124E430MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KD0	ek	XC6366A301MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KD0	fe	XC6124D730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KD1	-	XC9235C31CMR-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KD1	eb	XC6368A311MR	DC-DC-IC	PWM/PFM step-up, 3.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KD1	ej	XC6124E431MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KD1	ek	XC6366A311MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KD1	fe	XC6124D731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KD2	-	XC9235C32CMR-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KD2	eb	XC6368A321MR	DC-DC-IC	PWM/PFM step-up, 3.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KD2	ej	XC6124E432MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KD2	ek	XC6366A321MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KD2	fe	XC6124D732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KD3	-	XC9235C33CMR-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KD3	eb	XC6368A331MR	DC-DC-IC	PWM/PFM step-up, 3.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KD3	ej	XC6124E433MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KD3	ek	XC6366A331MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KD3	fe	XC6124D733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KD4	-	XC9235C34CMR-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KD4	eb	XC6368A341MR	DC-DC-IC	PWM/PFM step-up, 3.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KD4	ej	XC6124E434MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KD4	ek	XC6366A341MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KD4	fe	XC6124D734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KD5	-	XC9235C35CMR-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KD5	eb	XC6368A351MR	DC-DC-IC	PWM/PFM step-up, 3.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KD5	ej	XC6124E435MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KD5	ek	XC6366A351MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KD5	fe	XC6124D735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KD6	-	XC9235C36CMR-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KD6	eb	XC6368A361MR	DC-DC-IC	PWM/PFM step-up, 3.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KD6	ej	XC6124E436MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KD6	ek	XC6366A361MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KD6	fe	XC6124D736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KD7	-	XC9235C37CMR-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KD7	eb	XC6368A371MR	DC-DC-IC	PWM/PFM step-up, 3.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KD7	ej	XC6124E437MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KD7	ek	XC6366A371MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KD7	fe	XC6124D737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KD8	-	XC9235C38CMR-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KD8	eb	XC6368A381MR	DC-DC-IC	PWM/PFM step-up, 3.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KD8	ej	XC6124E438MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KD8	ek	XC6366A381MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KD8	fe	XC6124D738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KD9	-	XC9235C39CMR-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KD9	eb	XC6368A391MR	DC-DC-IC	PWM/PFM step-up, 3.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KD9	ej	XC6124E439MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KD9	ek	XC6366A391MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KD9	fe	XC6124D739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDA	-	XC9235C3ACMR-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KDA	eb	XC6368A305MR	DC-DC-IC	PWM/PFM step-up, 3.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KDA	ej	XC6124E440MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDA	ek	XC6366A305MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KDA	fe	XC6124D740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDB	-	XC9235C3BCMR-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KDB	eb	XC6368A315MR	DC-DC-IC	PWM/PFM step-up, 3.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KDB	ej	XC6124E441MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDB	ek	XC6366A315MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KDB	fe	XC6124D741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDC	-	XC9235C3CCMR-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KDC	eb	XC6368A325MR	DC-DC-IC	PWM/PFM step-up, 3.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KDC	ej	XC6124E442MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDC	ek	XC6366A325MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KDC	fe	XC6124D742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDD	-	XC9235C3DCMR-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KDD	eb	XC6368A335MR	DC-DC-IC	PWM/PFM step-up, 3.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KDD	ej	XC6124E443MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDD	ek	XC6366A335MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KDD	fe	XC6124D743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDE	-	XC9235C3ECMR-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KDE	eb	XC6368A345MR	DC-DC-IC	PWM/PFM step-up, 3.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KDE	ej	XC6124E444MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDE	ek	XC6366A345MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KDE	fe	XC6124D744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDF	-	XC9235C3FCMR-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KDF	eb	XC6368A355MR	DC-DC-IC	PWM/PFM step-up, 3.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KDF	ej	XC6124E445MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDF	ek	XC6366A355MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KDF	fe	XC6124D745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDH	-	XC9235C3HCMR-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KDH	eb	XC6368A365MR	DC-DC-IC	PWM/PFM step-up, 3.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KDH	ec	XC6124E416MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDH	ej	XC6124E446MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDH	ek	XC6366A365MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KDH	em	XC6124D716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDH	fe	XC6124D746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDK	-	XC9235C3KCMR-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KDK	eb	XC6368A375MR	DC-DC-IC	PWM/PFM step-up, 3.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KDK	ec	XC6124E417MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDK	ej	XC6124E447MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDK	ek	XC6366A375MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KDK	em	XC6124D717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDK	fe	XC6124D747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDL	-	XC9235C3LCMR-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KDL	eb	XC6368A385MR	DC-DC-IC	PWM/PFM step-up, 3.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KDL	ec	XC6124E418MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDL	ej	XC6124E448MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDL	ek	XC6366A385MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KDL	em	XC6124D718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDL	fe	XC6124D748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDM	-	XC9235C3MCMR-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KDM	eb	XC6368A395MR	DC-DC-IC	PWM/PFM step-up, 3.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KDM	ec	XC6124E419MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDM	ej	XC6124E449MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDM	ek	XC6366A395MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KDM	em	XC6124D719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDM	fe	XC6124D749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDN	ec	XC6124E420MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDN	ej	XC6124E450MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDN	em	XC6124D720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDN	fe	XC6124D750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDP	ec	XC6124E421MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDP	em	XC6124D721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDR	ec	XC6124E422MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDR	em	XC6124D722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDS	ec	XC6124E423MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDS	em	XC6124D723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDT	ec	XC6124E424MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDT	em	XC6124D724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDU	ec	XC6124E425MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDU	em	XC6124D725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDV	ec	XC6124E426MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDV	em	XC6124D726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDX	ec	XC6124E427MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDX	em	XC6124D727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDY	ec	XC6124E428MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDY	em	XC6124D728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KDZ	ec	XC6124E429MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KDZ	em	XC6124D729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	SOT-25	28g9	VD23	6g	Tor
KE	-	BU4921FWE	Vdet-IC	2.1V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KE	-	BU4921G	Vdet-IC	2.1V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KE	-	RT9167A-29CBR	LVR-IC	LDO, 2.9V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
KE0	-	XC9235C40CMR-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KE0	eb	XC6368A401MR	DC-DC-IC	PWM/PFM step-up, 4.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KE0	ej	XC6124E530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KE0	ek	XC6366A401MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KE1	eb	XC6368A411MR	DC-DC-IC	PWM/PFM step-up, 4.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KE1	ej	XC6124E531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KE1	ek	XC6366A411MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KE2	eb	XC6368A421MR	DC-DC-IC	PWM/PFM step-up, 4.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KE2	ej	XC6124E532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KE2	ek	XC6366A421MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KE3	eb	XC6368A431MR	DC-DC-IC	PWM/PFM step-up, 4.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KE3	ej	XC6124E533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KE3	ek	XC6366A431MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KE4	eb	XC6368A441MR	DC-DC-IC	PWM/PFM step-up, 4.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KE4	ej	XC6124E534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KE4	ek	XC6366A441MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KE5	eb	XC6368A451MR	DC-DC-IC	PWM/PFM step-up, 4.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KE5	ej	XC6124E535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KE5	ek	XC6366A451MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KE6	eb	XC6368A461MR	DC-DC-IC	PWM/PFM step-up, 4.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KE6	ej	XC6124E536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KE6	ek	XC6366A461MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KE7	eb	XC6368A471MR	DC-DC-IC	PWM/PFM step-up, 4.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KE7	ej	XC6124E537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KE7	ek	XC6366A471MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KE8	eb	XC6368A481MR	DC-DC-IC	PWM/PFM step-up, 4.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KE8	ej	XC6124E538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KE8	ek	XC6366A481MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KE9	eb	XC6368A491MR	DC-DC-IC	PWM/PFM step-up, 4.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KE9	ej	XC6124E539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KE9	ek	XC6366A491MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KEA	eb	XC6368A405MR	DC-DC-IC	PWM/PFM step-up, 4.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KEA	ej	XC6124E540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEA	ek	XC6366A405MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KEB	eb	XC6368A415MR	DC-DC-IC	PWM/PFM step-up, 4.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KEB	ej	XC6124E541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEB	ek	XC6366A415MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KEC	eb	XC6368A425MR	DC-DC-IC	PWM/PFM step-up, 4.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KEC	ej	XC6124E542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEC	ek	XC6366A425MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KED	eb	XC6368A435MR	DC-DC-IC	PWM/PFM step-up, 4.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KED	ej	XC6124E543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KED	ek	XC6366A435MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KEE	eb	XC6368A445MR	DC-DC-IC	PWM/PFM step-up, 4.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KEE	ej	XC6124E544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEE	ek	XC6366A445MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KEF	eb	XC6368A455MR	DC-DC-IC	PWM/PFM step-up, 4.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KEF	ej	XC6124E545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEF	ek	XC6366A455MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KEH	eb	XC6368A465MR	DC-DC-IC	PWM/PFM step-up, 4.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KEH	ec	XC6124E516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEH	ej	XC6124E546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEH	ek	XC6366A465MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KEK	eb	XC6368A475MR	DC-DC-IC	PWM/PFM step-up, 4.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KEK	ec	XC6124E517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEK	ej	XC6124E547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEK	ek	XC6366A475MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KEL	eb	XC6368A485MR	DC-DC-IC	PWM/PFM step-up, 4.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KEL	ec	XC6124E518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEL	ej	XC6124E548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEL	ek	XC6366A485MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KEM	eb	XC6368A495MR	DC-DC-IC	PWM/PFM step-up, 4.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KEM	ec	XC6124E519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEM	ej	XC6124E549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEM	ek	XC6366A495MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KEN	ec	XC6124E520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEN	ej	XC6124E550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEP	ec	XC6124E521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KER	ec	XC6124E522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KES	ec	XC6124E523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KET	ec	XC6124E524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEU	ec	XC6124E525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEV	ec	XC6124E526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEX	ec	XC6124E527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEY	ec	XC6124E528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KEZ	ec	XC6124E529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KF	-	BU4922FWE	Vdet-IC	2.2V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KF	-	BU4922G	Vdet-IC	2.2V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KF	-	RT9167A-30CBR	LVR-IC	LDO, 3.0V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
KF0	eb	XC6368A501MR	DC-DC-IC	PWM/PFM step-up, 5.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KF0	ej	XC6124E630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KF0	ek	XC6366A501MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KF1	eb	XC6368A511MR	DC-DC-IC	PWM/PFM step-up, 5.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KF1	ej	XC6124E631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KF1	ek	XC6366A511MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KF2	eb	XC6368A521MR	DC-DC-IC	PWM/PFM step-up, 5.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KF2	ej	XC6124E632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KF2	ek	XC6366A521MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KF3	eb	XC6368A531MR	DC-DC-IC	PWM/PFM step-up, 5.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KF3	ej	XC6124E633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KF3	ek	XC6366A531MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KF4	eb	XC6368A541MR	DC-DC-IC	PWM/PFM step-up, 5.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KF4	ej	XC6124E634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KF4	ek	XC6366A541MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KF5	eb	XC6368A551MR	DC-DC-IC	PWM/PFM step-up, 5.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KF5	ej	XC6124E635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KF5	ek	XC6366A551MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KF6	eb	XC6368A561MR	DC-DC-IC	PWM/PFM step-up, 5.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KF6	ej	XC6124E636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KF6	ek	XC6366A561MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KF7	eb	XC6368A571MR	DC-DC-IC	PWM/PFM step-up, 5.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KF7	ej	XC6124E637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KF7	ek	XC6366A571MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KF8	-	XC9235C08DMR-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KF8	eb	XC6368A581MR	DC-DC-IC	PWM/PFM step-up, 5.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KF8	ej	XC6124E638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KF8	ek	XC6366A581MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KF9	-	XC9235C09DMR-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KF9	eb	XC6368A591MR	DC-DC-IC	PWM/PFM step-up, 5.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KF9	ej	XC6124E639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KF9	ek	XC6366A591MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KFA	eb	XC6368A505MR	DC-DC-IC	PWM/PFM step-up, 5.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KFA	ej	XC6124E640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFA	ek	XC6366A505MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KFB	eb	XC6368A515MR	DC-DC-IC	PWM/PFM step-up, 5.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KFB	ej	XC6124E641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFB	ek	XC6366A515MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.1V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KFC	eb	XC6368A525MR	DC-DC-IC	PWM/PFM step-up, 5.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KFC	ej	XC6124E642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFC	ek	XC6366A525MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.2V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KFD	eb	XC6368A535MR	DC-DC-IC	PWM/PFM step-up, 5.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KFD	ej	XC6124E643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFD	ek	XC6366A535MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.3V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KFE	eb	XC6368A545MR	DC-DC-IC	PWM/PFM step-up, 5.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KFE	ej	XC6124E644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFE	ek	XC6366A545MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.4V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KFF	eb	XC6368A555MR	DC-DC-IC	PWM/PFM step-up, 5.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KFF	ej	XC6124E645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFF	ek	XC6366A555MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.5V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KFH	eb	XC6368A565MR	DC-DC-IC	PWM/PFM step-up, 5.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KFH	ec	XC6124E616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFH	ej	XC6124E646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFH	ek	XC6366A565MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.6V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KFK	eb	XC6368A575MR	DC-DC-IC	PWM/PFM step-up, 5.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KFK	ec	XC6124E617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFK	ej	XC6124E647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFK	ek	XC6366A575MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.7V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KFL	-	XC9235C0LDMR-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KFL	eb	XC6368A585MR	DC-DC-IC	PWM/PFM step-up, 5.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KFL	ec	XC6124E618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFL	ej	XC6124E648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFL	ek	XC6366A585MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.8V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KFM	-	XC9235C0MDMR-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KFM	eb	XC6368A595MR	DC-DC-IC	PWM/PFM step-up, 5.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KFM	ec	XC6124E619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFM	ej	XC6124E649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFM	ek	XC6366A595MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.9V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KFN	ec	XC6124E620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFN	ej	XC6124E650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFP	ec	XC6124E621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFR	ec	XC6124E622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFS	ec	XC6124E623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFT	ec	XC6124E624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFU	ec	XC6124E625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFV	ec	XC6124E626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFX	ec	XC6124E627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFY	ec	XC6124E628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KFZ	ec	XC6124E629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KG	-	BU4923FWE	Vdet-IC	2.3V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KG	-	BU4923G	Vdet-IC	2.3V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KG	-	RT9167A-31CBR	LVR-IC	LDO, 3.1V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
KH	-	BU4924FWE	Vdet-IC	2.4V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KH	-	BU4924G	Vdet-IC	2.4V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KH	-	RT9167A-32CBR	LVR-IC	LDO, 3.2V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
KH0	-	XC9235C10DMR-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KH0	eb	XC6368A601MR	DC-DC-IC	PWM/PFM step-up, 6.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KH0	ej	XC6124E730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KH0	ek	XC6366A601MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 6.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KH1	-	XC9235C11DMR-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KH1	eb	XC6368A611MR	DC-DC-IC	PWM/PFM step-up, 6.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KH1	ej	XC6124E731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KH2	-	XC9235C12DMR-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KH2	eb	XC6368A621MR	DC-DC-IC	PWM/PFM step-up, 6.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KH2	ej	XC6124E732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KH3	-	XC9235C13DMR-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KH3	eb	XC6368A631MR	DC-DC-IC	PWM/PFM step-up, 6.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KH3	ej	XC6124E733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KH4	-	XC9235C14DMR-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KH4	eb	XC6368A641MR	DC-DC-IC	PWM/PFM step-up, 6.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KH4	ej	XC6124E734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KH5	-	XC9235C15DMR-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KH5	eb	XC6368A651MR	DC-DC-IC	PWM/PFM step-up, 6.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KH5	ej	XC6124E735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KH6	-	XC9235C16DMR-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KH6	ej	XC6124E736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KH7	-	XC9235C17DMR-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KH7	ej	XC6124E737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KH8	-	XC9235C18DMR-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KH8	ej	XC6124E738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KH9	-	XC9235C19DMR-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KH9	ej	XC6124E739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHA	-	XC9235C1ADMR-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KHA	eb	XC6368A605MR	DC-DC-IC	PWM/PFM step-up, 6.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KHA	ej	XC6124E740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHA	ek	XC6366A605MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 6.0V±2.5%, 1A, +CE	SOT-25	28zm	DC7	6g	Tor
KHB	-	XC9235C1BDMR-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KHB	eb	XC6368A615MR	DC-DC-IC	PWM/PFM step-up, 6.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KHB	ej	XC6124E741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHC	-	XC9235C1CDMR-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KHC	eb	XC6368A625MR	DC-DC-IC	PWM/PFM step-up, 6.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KHC	ej	XC6124E742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHD	-	XC9235C1DDMR-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KHD	eb	XC6368A635MR	DC-DC-IC	PWM/PFM step-up, 6.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KHD	ej	XC6124E743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHE	-	XC9235C1EDMR-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KHE	eb	XC6368A645MR	DC-DC-IC	PWM/PFM step-up, 6.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KHE	ej	XC6124E744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHF	-	XC9235C1FDMR-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KHF	eb	XC6368A655MR	DC-DC-IC	PWM/PFM step-up, 6.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sh	DC11	6g	Tor
KHF	ej	XC6124E745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHH	-	XC9235C1HDMR-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KHH	ec	XC6124E716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHH	ej	XC6124E746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHK	-	XC9235C1KDMR-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KHK	ec	XC6124E717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHK	ej	XC6124E747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHL	-	XC9235C1LDMR-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KHL	ec	XC6124E718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHL	ej	XC6124E748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHM	-	XC9235C1MDMR-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KHM	ec	XC6124E719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHM	ej	XC6124E749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHN	ec	XC6124E720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHN	ej	XC6124E750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHP	ec	XC6124E721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHR	ec	XC6124E722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHS	ec	XC6124E723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHT	ec	XC6124E724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHU	ec	XC6124E725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHV	ec	XC6124E726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHX	ec	XC6124E727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHY	ec	XC6124E728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KHZ	ec	XC6124E729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	SOT-25	28g9	VD23	6g	Tor
KJ	-	BU4925FWE	Vdet-IC	2.5V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KJ	-	BU4925G	Vdet-IC	2.5V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KJ	-	RT9167A-33CBR	LVR-IC	LDO, 3.3V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
KJ-	-	RT9167A-33PBR	LVR-IC	LDO, 3.3V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
KK	-	BU4926FWE	Vdet-IC	2.6V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KK	-	BU4926G	Vdet-IC	2.6V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KK	-	RT9167A-34CBR	LVR-IC	LDO, 3.4V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
KK0	-	XC9235C20DMR-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KK0	ej	XC6124F530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KK1	-	XC9235C21DMR-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KK1	ej	XC6124F531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KK2	-	XC9235C22DMR-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KK2	ej	XC6124F532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KK3	-	XC9235C23DMR-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KK3	ej	XC6124F533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KK4	-	XC9235C24DMR-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KK4	ej	XC6124F534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KK5	-	XC9235C25DMR-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KK5	ej	XC6124F535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KK6	-	XC9235C26DMR-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KK6	ej	XC6124F536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KK7	-	XC9235C27DMR-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KK7	ej	XC6124F537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KK8	-	XC9235C28DMR-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KK8	ej	XC6124F538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KK9	-	XC9235C29DMR-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KK9	ej	XC6124F539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKA	-	XC9235C2ADMR-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KKA	ej	XC6124F540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKB	-	XC9235C2BDMR-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KKB	ej	XC6124F541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKC	-	XC9235C2CDMR-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KKC	ej	XC6124F542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKD	-	XC9235C2DDMR-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KKD	ej	XC6124F543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKE	-	XC9235C2EDMR-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KKE	ej	XC6124F544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKF	-	XC9235C2FDMR-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KKF	ej	XC6124F545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKH	-	XC9235C2HDMR-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KKH	ec	XC6124F516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKH	ej	XC6124F546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKK	-	XC9235C2KDMR-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KKK	ec	XC6124F517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKK	ej	XC6124F547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKL	-	XC9235C2LDMR-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KKL	ec	XC6124F518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKL	ej	XC6124F548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKM	-	XC9235C2MDMR-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KKM	ec	XC6124F519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKM	ej	XC6124F549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKN	ec	XC6124F520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKN	ej	XC6124F550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKP	ec	XC6124F521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKR	ec	XC6124F522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKS	ec	XC6124F523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKT	ec	XC6124F524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKU	ec	XC6124F525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKV	ec	XC6124F526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKX	ec	XC6124F527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKY	ec	XC6124F528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KKZ	ec	XC6124F529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KL	-	AAT3515IGV-2.93-C	Vdet-IC	2.93V±1.5%, -MR, ±Reset PPO, 140ms	SOT-23-5	28xf	VD21	6k	Ant
KL	-	BU4927FWE	Vdet-IC	2.7V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KL	-	BU4927G	Vdet-IC	2.7V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KL	-	RT9167A-35CBR	LVR-IC	LDO, 3.5V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
KL0	-	XC9235C30DMR-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KL0	ej	XC6124F630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KL1	-	XC9235C31DMR-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KL1	ej	XC6124F631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KL2	-	XC9235C32DMR-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KL2	ej	XC6124F632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KL3	-	XC9235C33DMR-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KL3	ej	XC6124F633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KL4	-	XC9235C34DMR-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KL4	ej	XC6124F634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KL5	-	XC9235C35DMR-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KL5	ej	XC6124F635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KL6	-	XC9235C36DMR-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KL6	ej	XC6124F636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KL7	-	XC9235C37DMR-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KL7	ej	XC6124F637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KL8	-	XC9235C38DMR-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KL8	ej	XC6124F638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KL9	-	XC9235C39DMR-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KL9	ej	XC6124F639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLA	-	XC9235C3ADMR-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KLA	ej	XC6124F640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLB	-	XC9235C3BDMR-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KLB	ej	XC6124F641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLC	-	XC9235C3CDMR-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KLC	ej	XC6124F642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLD	-	XC9235C3DDMR-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KLD	ej	XC6124F643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLE	-	XC9235C3EDMR-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KLE	ej	XC6124F644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLF	-	XC9235C3FDMR-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KLF	ej	XC6124F645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLH	-	XC9235C3HDMR-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KLH	ec	XC6124F616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLH	ej	XC6124F646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLK	-	XC9235C3KDMR-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KLK	ec	XC6124F617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLK	ej	XC6124F647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLL	-	XC9235C3LDMR-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KLL	ec	XC6124F618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLL	ej	XC6124F648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLM	-	XC9235C3MDMR-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KLM	ec	XC6124F619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLM	ej	XC6124F649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLN	ec	XC6124F620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLN	ej	XC6124F650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLP	ec	XC6124F621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLR	ec	XC6124F622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLS	ec	XC6124F623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLT	ec	XC6124F624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLU	ec	XC6124F625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLV	ec	XC6124F626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLX	ec	XC6124F627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLY	ec	XC6124F628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KLZ	ec	XC6124F629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KM	-	AAT3515IGV-4.38-C	Vdet-IC	4.38V±1.5%, -MR, ±Reset PPO, 140ms	SOT-23-5	28xf	VD21	6k	Ant
KM	-	BU4928FWE	Vdet-IC	2.8V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KM	-	BU4928G	Vdet-IC	2.8V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KM	-	RT9167A-36CBR	LVR-IC	LDO, 3.6V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
KM-	-	RT9167A-36PBR	LVR-IC	LDO, 3.6V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
KM0	-	XC9235C40DMR-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
KM0	ej	XC6124F730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KM1	ej	XC6124F731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KM2	ej	XC6124F732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KM3	ej	XC6124F733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KM4	ej	XC6124F734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KM5	ej	XC6124F735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KM6	ej	XC6124F736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KM7	ej	XC6124F737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KM8	ej	XC6124F738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KM9	ej	XC6124F739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMA	ej	XC6124F740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMB	ej	XC6124F741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMC	ej	XC6124F742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMD	ej	XC6124F743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KME	ej	XC6124F744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMF	ej	XC6124F745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMH	ec	XC6124F716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMH	ej	XC6124F746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMK	ec	XC6124F717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMK	ej	XC6124F747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KML	ec	XC6124F718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KML	ej	XC6124F748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMM	ec	XC6124F719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMM	ej	XC6124F749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMN	ec	XC6124F720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMN	ej	XC6124F750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMP	ec	XC6124F721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMR	ec	XC6124F722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMS	ec	XC6124F723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMT	ec	XC6124F724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KMU	ec	XC6124F725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMV	ec	XC6124F726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMX	ec	XC6124F727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMY	ec	XC6124F728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KMZ	ec	XC6124F729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	SOT-25	28g9	VD23	6g	Tor
KN	-	BU4929FWE	Vdet-IC	2.9V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KN	-	BU4929G	Vdet-IC	2.9V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KN	-	RT9167A-37CBR	LVR-IC	LDO, 3.7V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
KN0	ej	XC6124A230MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KN1	ej	XC6124A231MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KN2	ej	XC6124A232MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KN3	ej	XC6124A233MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KN4	ej	XC6124A234MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KN5	ej	XC6124A235MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KN6	ej	XC6124A236MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KN7	ej	XC6124A237MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KN8	-	XC9235D08CMR-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KN8	ej	XC6124A238MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KN9	-	XC9235D09CMR-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KN9	ej	XC6124A239MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNA	ej	XC6124A240MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNB	ej	XC6124A241MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNC	ej	XC6124A242MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KND	ej	XC6124A243MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNE	ej	XC6124A244MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNF	ej	XC6124A245MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNH	ec	XC6124A216MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNH	ej	XC6124A246MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNK	ec	XC6124A217MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNK	ej	XC6124A247MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNL	-	XC9235D0LCMR-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KNL	ec	XC6124A218MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNL	ej	XC6124A248MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNM	-	XC9235D0MCMR-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KNM	ec	XC6124A219MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNM	ej	XC6124A249MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNN	ec	XC6124A220MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNN	ej	XC6124A250MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNP	ec	XC6124A221MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNR	ec	XC6124A222MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNS	ec	XC6124A223MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNT	ec	XC6124A224MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNU	ec	XC6124A225MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNV	ec	XC6124A226MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNX	ec	XC6124A227MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNY	ec	XC6124A228MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KNZ	ec	XC6124A229MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KP	-	BU4930FWE	Vdet-IC	3.0V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KP	-	BU4930G	Vdet-IC	3.0V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KP0	-	XC9235D10CMR-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KP0	ej	XC6124A330MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KP1	-	XC9235D11CMR-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KP1	ej	XC6124A331MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KP2	-	XC9235D12CMR-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KP2	ej	XC6124A332MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KP3	-	XC9235D13CMR-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KP3	ej	XC6124A333MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KP4	-	XC9235D14CMR-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KP4	ej	XC6124A334MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KP5	-	XC9235D15CMR-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KP5	ej	XC6124A335MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KP6	-	XC9235D16CMR-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KP6	ej	XC6124A336MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KP7	-	XC9235D17CMR-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KP7	ej	XC6124A337MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KP8	-	XC9235D18CMR-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KP8	ej	XC6124A338MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KP9	-	XC9235D19CMR-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KP9	ej	XC6124A339MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPA	-	XC9235D1ACMR-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KPA	ej	XC6124A340MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPB	-	XC9235D1BCMR-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KPB	ej	XC6124A341MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPC	ej	XC6124A342MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPD	-	XC9235D1DCMR-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KPD	ej	XC6124A343MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPE	-	XC9235D1ECMR-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KPE	ej	XC6124A344MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPF	-	XC9235D1FCMR-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KPF	ej	XC6124A345MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPH	-	XC9235D1HCMR-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KPH	ec	XC6124A316MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPH	ej	XC6124A346MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPK	-	XC9235D1KCMR-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KPK	ec	XC6124A317MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPK	ej	XC6124A347MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPL	-	XC9235D1LCMR-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KPL	ec	XC6124A318MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPL	ej	XC6124A348MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPM	-	XC9235D1MCMR-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KPM	ec	XC6124A319MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPM	ej	XC6124A349MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPN	ec	XC6124A320MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPN	ej	XC6124A350MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPP	ec	XC6124A321MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPR	ec	XC6124A322MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPS	ec	XC6124A323MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPT	ec	XC6124A324MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPU	ec	XC6124A325MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPV	-	XC9235D1CCMR-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KPV	ec	XC6124A326MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPX	ec	XC6124A327MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPY	ec	XC6124A328MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KPZ	ec	XC6124A329MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KQ	-	BU4931FWE	Vdet-IC	3.1V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KQ	-	BU4931G	Vdet-IC	3.1V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KR	-	BU4932FWE	Vdet-IC	3.2V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KR	-	BU4932G	Vdet-IC	3.2V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KR	-	R1112N151B	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KR0	-	XC9235D20CMR-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KR0	ej	XC6124A430MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KR1	-	XC9235D21CMR-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KR1	ej	XC6124A431MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KR2	-	XC9235D22CMR-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KR2	ej	XC6124A432MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KR3	-	XC9235D23CMR-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KR3	ej	XC6124A433MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KR4	-	XC9235D24CMR-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KR4	ej	XC6124A434MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KR5	-	XC9235D25CMR-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KR5	ej	XC6124A435MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KR6	-	XC9235D26CMR-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KR6	ej	XC6124A436MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KR7	-	XC9235D27CMR-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KR7	ej	XC6124A437MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KR8	-	XC9235D28CMR-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KR8	ej	XC6124A438MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KR9	-	XC9235D29CMR-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KR9	ej	XC6124A439MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRA	-	XC9235D2ACMR-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KRA	ej	XC6124A440MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRB	-	XC9235D2BCMR-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KRB	ej	XC6124A441MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRC	-	XC9235D2CCMR-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KRC	ej	XC6124A442MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRD	-	XC9235D2DCMR-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KRD	ej	XC6124A443MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRE	-	XC9235D2ECMR-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KRE	ej	XC6124A444MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRF	-	XC9235D2FCMR-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KRF	ej	XC6124A445MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRH	-	XC9235D2HCMR-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KRH	ec	XC6124A416MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRH	ej	XC6124A446MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRK	-	XC9235D2KCMR-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KRK	ec	XC6124A417MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRK	ej	XC6124A447MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRL	-	XC9235D2LCMR-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KRL	ec	XC6124A418MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRL	ej	XC6124A448MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRM	-	XC9235D2MCMR-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KRM	ec	XC6124A419MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRM	ej	XC6124A449MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRN	ec	XC6124A420MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRN	ej	XC6124A450MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRP	ec	XC6124A421MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRR	ec	XC6124A422MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRS	ec	XC6124A423MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRT	ec	XC6124A424MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRU	ec	XC6124A425MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRV	ec	XC6124A426MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRX	ec	XC6124A427MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRY	ec	XC6124A428MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KRZ	ec	XC6124A429MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KS	-	BU4933FWE	Vdet-IC	3.3V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KS	-	BU4933G	Vdet-IC	3.3V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KS	-	R1112N161B	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KS0	-	XC9235D30CMR-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KS0	ej	XC6124A530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KS1	-	XC9235D31CMR-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KS1	ej	XC6124A531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KS2	-	XC9235D32CMR-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KS2	ej	XC6124A532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KS3	-	XC9235D33CMR-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KS3	ej	XC6124A533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KS4	-	XC9235D34CMR-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KS4	ej	XC6124A534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KS5	-	XC9235D35CMR-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KS5	ej	XC6124A535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KS6	-	XC9235D36CMR-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KS6	ej	XC6124A536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KS7	-	XC9235D37CMR-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KS7	ej	XC6124A537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KS8	-	XC9235D38CMR-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KS8	ej	XC6124A538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KS9	-	XC9235D39CMR-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KS9	ej	XC6124A539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSA	-	XC9235D3ACMR-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KSA	ej	XC6124A540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSB	-	XC9235D3BCMR-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KSB	ej	XC6124A541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSC	-	XC9235D3CCMR-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KSC	ej	XC6124A542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSD	-	XC9235D3DCMR-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KSD	ej	XC6124A543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSE	-	XC9235D3ECMR-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KSE	ej	XC6124A544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSF	-	XC9235D3FCMR-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KSF	ej	XC6124A545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSH	-	XC9235D3HCMR-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KSH	ec	XC6124A516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSH	ej	XC6124A546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSK	-	XC9235D3KCMR-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KSK	ec	XC6124A517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSK	ej	XC6124A547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSL	-	XC9235D3LCMR-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KSL	ec	XC6124A518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSL	ej	XC6124A548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSM	-	XC9235D3MCMR-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KSM	ec	XC6124A519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KSM	ej	XC6124A549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSN	ec	XC6124A520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSN	ej	XC6124A550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSP	ec	XC6124A521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSR	ec	XC6124A522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSS	ec	XC6124A523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KST	ec	XC6124A524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSU	ec	XC6124A525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSV	ec	XC6124A526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSX	ec	XC6124A527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSY	ec	XC6124A528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KSZ	ec	XC6124A529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KT	-	BU4934FWE	Vdet-IC	3.4V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KT	-	BU4934G	Vdet-IC	3.4V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KT	-	R1112N171B	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KT0	-	XC9235D40CMR-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KT0	ej	XC6124A730MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KT1	ej	XC6124A731MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KT2	ej	XC6124A732MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KT3	ej	XC6124A733MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KT4	ej	XC6124A734MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KT5	ej	XC6124A735MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KT6	ej	XC6124A736MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KT7	ej	XC6124A737MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KT8	ej	XC6124A738MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KT9	ej	XC6124A739MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTA	ej	XC6124A740MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTB	ej	XC6124A741MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTC	ej	XC6124A742MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTD	ej	XC6124A743MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTE	ej	XC6124A744MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTF	ej	XC6124A745MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTH	ec	XC6124A716MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTH	ej	XC6124A746MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTK	ec	XC6124A717MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTK	ej	XC6124A747MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTL	ec	XC6124A718MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTL	ej	XC6124A748MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTM	ec	XC6124A719MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTM	ej	XC6124A749MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTN	ec	XC6124A720MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTN	ej	XC6124A750MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTP	ec	XC6124A721MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTR	ec	XC6124A722MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTS	ec	XC6124A723MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTT	ec	XC6124A724MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTU	ec	XC6124A725MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTV	ec	XC6124A726MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTX	ec	XC6124A727MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTY	ec	XC6124A728MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KTZ	ec	XC6124A729MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KU	-	BU4935FWE	Vdet-IC	3.5V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KU	-	BU4935G	Vdet-IC	3.5V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KU	-	R1112N181B	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KU0	ej	XC6124A630MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KU1	ej	XC6124A631MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KU2	ej	XC6124A632MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KU3	ej	XC6124A633MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KU4	ej	XC6124A634MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KU5	ej	XC6124A635MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KU6	ej	XC6124A636MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KU7	ej	XC6124A637MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KU8	-	XC9235D08DMR-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KU8	ej	XC6124A638MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KU9	-	XC9235D09DMR-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KU9	ej	XC6124A639MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUA	ej	XC6124A640MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUB	ej	XC6124A641MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUC	ej	XC6124A642MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUD	ej	XC6124A643MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KUE	ej	XC6124A644MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUF	ej	XC6124A645MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUH	ec	XC6124A616MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUH	ej	XC6124A646MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUK	ec	XC6124A617MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUK	ej	XC6124A647MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUL	-	XC9235D0LDMR-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KUL	ec	XC6124A618MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUL	ej	XC6124A648MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUM	-	XC9235D0MDMR-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KUM	ec	XC6124A619MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUM	ej	XC6124A649MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUN	ec	XC6124A620MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUN	ej	XC6124A650MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUP	ec	XC6124A621MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUR	ec	XC6124A622MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUS	ec	XC6124A623MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUT	ec	XC6124A624MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUU	ec	XC6124A625MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUV	ec	XC6124A626MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUX	ec	XC6124A627MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUY	ec	XC6124A628MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KUZ	ec	XC6124A629MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	SOT-25	28g9	VD23	6g	Tor
KV	-	BU4936FWE	Vdet-IC	3.6V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KV	-	BU4936G	Vdet-IC	3.6V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KV	-	R1112N191B	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
KV0	-	XC9235D10DMR-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KV0	ej	XC6124C230MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KV1	-	XC9235D11DMR-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KV1	ej	XC6124C231MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KV2	-	XC9235D12DMR-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KV2	ej	XC6124C232MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KV3	-	XC9235D13DMR-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KV3	ej	XC6124C233MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KV4	-	XC9235D14DMR-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KV4	ej	XC6124C234MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KV5	-	XC9235D15DMR-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KV5	ej	XC6124C235MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KV6	-	XC9235D16DMR-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KV6	ej	XC6124C236MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KV7	-	XC9235D17DMR-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KV7	ej	XC6124C237MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KV8	-	XC9235D18DMR-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KV8	ej	XC6124C238MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KV9	-	XC9235D19DMR-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KV9	ej	XC6124C239MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVA	-	XC9235D1ADMR-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KVA	ej	XC6124C240MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVB	-	XC9235D1BDMR-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KVB	ej	XC6124C241MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVC	-	XC9235D1CDMR-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KVC	ej	XC6124C242MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVD	-	XC9235D1DDMR-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KVD	ej	XC6124C243MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVE	-	XC9235D1EDMR-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KVE	ej	XC6124C244MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVF	-	XC9235D1FDMR-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KVF	ej	XC6124C245MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVH	-	XC9235D1HDMR-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KVH	ec	XC6124C216MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVH	ej	XC6124C246MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVK	-	XC9235D1KDMR-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KVK	ec	XC6124C217MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVK	ej	XC6124C247MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVL	-	XC9235D1LDMR-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KVL	ec	XC6124C218MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVL	ej	XC6124C248MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVM	-	XC9235D1MDMR-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KVM	ec	XC6124C219MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVM	ej	XC6124C249MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KVN	ec	XC6124C220MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVN	ej	XC6124C250MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVP	ec	XC6124C221MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVR	ec	XC6124C222MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVS	ec	XC6124C223MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVT	ec	XC6124C224MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVU	ec	XC6124C225MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVV	ec	XC6124C226MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVX	ec	XC6124C227MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVY	ec	XC6124C228MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KVZ	ec	XC6124C229MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KW	-	BU4937FWE	Vdet-IC	3.7V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KW	-	BU4937G	Vdet-IC	3.7V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KW	-	RT9167A-45CBR	LVR-IC	LDO, 4.3V±2%, 600mA, +CE	SOT-23-5	28vr1	VR7	6g	Rct
KW25	fb	MIC5255-2.5YM5	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
KW26	fb	MIC5255-2.6YM5	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
KW27	fb	MIC5255-2.7YM5	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
KW28	fb	MIC5255-2.8YM5	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
KW29	fb	MIC5255-2.9YM5	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
KW2H	fb	MIC5255-2.75YM5	LVR-IC	LDO, 2.75V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
KW2J	fb	MIC5255-2.85YM5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
KW30	fb	MIC5255-3.0YM5	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
KW31	fb	MIC5255-3.1YM5	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
KW32	fb	MIC5255-3.2YM5	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
KW33	fb	MIC5255-3.3YM5	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
KW35	fb	MIC5255-3.5YM5	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
KX	-	BU4938FWE	Vdet-IC	3.8V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KX	-	BU4938G	Vdet-IC	3.8V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KX0	-	XC9235D20DMR-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KX0	ej	XC6124C330MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KX1	-	XC9235D21DMR-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KX1	ej	XC6124C331MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KX2	-	XC9235D22DMR-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KX2	ej	XC6124C332MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KX3	-	XC9235D23DMR-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KX3	ej	XC6124C333MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KX4	-	XC9235D24DMR-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KX4	ej	XC6124C334MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KX5	-	XC9235D25DMR-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KX5	ej	XC6124C335MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KX6	-	XC9235D26DMR-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KX6	ej	XC6124C336MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KX7	-	XC9235D27DMR-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KX7	ej	XC6124C337MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KX8	-	XC9235D28DMR-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KX8	ej	XC6124C338MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KX9	-	XC9235D29DMR-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KX9	ej	XC6124C339MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXA	-	XC9235D2ADMR-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KXA	ej	XC6124C340MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXB	-	XC9235D2BDMR-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KXB	ej	XC6124C341MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXC	-	XC9235D2CDMR-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KXC	ej	XC6124C342MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXD	-	XC9235D2DDMR-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KXD	ej	XC6124C343MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXE	-	XC9235D2EDMR-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KXE	ej	XC6124C344MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXF	-	XC9235D2FDMR-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KXF	ej	XC6124C345MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXH	-	XC9235D2HDMR-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KXH	ec	XC6124C316MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXH	ej	XC6124C346MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXK	-	XC9235D2KDMR-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KXK	ec	XC6124C317MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXK	ej	XC6124C347MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXL	-	XC9235D2LDMR-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KXL	ec	XC6124C318MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXL	ej	XC6124C348MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXM	-	XC9235D2MDMR-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KXM	ec	XC6124C319MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXM	ej	XC6124C349MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXN	ec	XC6124C320MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXN	ej	XC6124C350MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXP	ec	XC6124C321MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXR	ec	XC6124C322MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXS	ec	XC6124C323MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXT	ec	XC6124C324MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXU	ec	XC6124C325MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXV	ec	XC6124C326MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXX	ec	XC6124C327MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXY	ec	XC6124C328MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KXZ	ec	XC6124C329MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KY	-	BU4939FWE	Vdet-IC	3.9V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KY	-	BU4939G	Vdet-IC	3.9V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KY-	-	RT9198-26PV	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
KY0	-	XC9235D30DMR-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KY0	ej	XC6124C430MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KY1	-	XC9235D31DMR-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KY1	ej	XC6124C431MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KY2	-	XC9235D32DMR-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KY2	ej	XC6124C432MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KY3	-	XC9235D33DMR-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KY3	ej	XC6124C433MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KY4	-	XC9235D34DMR-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KY4	ej	XC6124C434MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KY5	-	XC9235D35DMR-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KY5	ej	XC6124C435MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KY6	-	XC9235D36DMR-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KY6	ej	XC6124C436MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KY7	-	XC9235D37DMR-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KY7	ej	XC6124C437MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KY8	-	XC9235D38DMR-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KY8	ej	XC6124C438MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KY9	-	XC9235D39DMR-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KY9	ej	XC6124C439MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYA	-	XC9235D3ADMR-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KYA	ej	XC6124C440MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYB	-	XC9235D3BDMR-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KYB	ej	XC6124C441MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYC	-	XC9235D3CDMR-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KYC	ej	XC6124C442MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYD	-	XC9235D3DDMR-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KYD	ej	XC6124C443MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYE	-	XC9235D3EDMR-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KYE	ej	XC6124C444MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYF	-	XC9235D3FDMR-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KYF	ej	XC6124C445MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYH	-	XC9235D3HDMR-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KYH	ec	XC6124C416MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYH	ej	XC6124C446MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYK	-	XC9235D3KDMR-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KYK	ec	XC6124C417MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYK	ej	XC6124C447MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYL	-	XC9235D3LDMR-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KYL	ec	XC6124C418MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYL	ej	XC6124C448MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYM	-	XC9235D3MDMR-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KYM	ec	XC6124C419MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYM	ej	XC6124C449MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYN	ec	XC6124C420MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYN	ej	XC6124C450MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYP	ec	XC6124C421MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYR	ec	XC6124C422MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYS	ec	XC6124C423MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYT	ec	XC6124C424MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYU	ec	XC6124C425MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYV	ec	XC6124C426MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYX	ec	XC6124C427MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KYY	ec	XC6124C428MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KYZ	ec	XC6124C429MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZ	-	BU4940FWE	Vdet-IC	4.0V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
KZ	-	BU4940G	Vdet-IC	4.0V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
KZ0	-	XC9235D40DMR-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
KZ0	ej	XC6124C530MR-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZ1	ej	XC6124C531MR-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZ2	ej	XC6124C532MR-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZ3	ej	XC6124C533MR-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZ4	ej	XC6124C534MR-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZ5	ej	XC6124C535MR-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZ6	ej	XC6124C536MR-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZ7	ej	XC6124C537MR-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZ8	ej	XC6124C538MR-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZ9	ej	XC6124C539MR-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZA	ej	XC6124C540MR-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZB	ej	XC6124C541MR-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZC	ej	XC6124C542MR-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZD	ej	XC6124C543MR-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZE	ej	XC6124C544MR-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZF	ej	XC6124C545MR-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZH	ec	XC6124C516MR-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZH	ej	XC6124C546MR-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZK	ec	XC6124C517MR-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZK	ej	XC6124C547MR-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZL	ec	XC6124C518MR-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZL	ej	XC6124C548MR-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZM	ec	XC6124C519MR-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZM	ej	XC6124C549MR-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZN	ec	XC6124C520MR-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZN	ej	XC6124C550MR-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZP	ec	XC6124C521MR-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZR	ec	XC6124C522MR-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZS	ec	XC6124C523MR-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZT	ec	XC6124C524MR-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZU	ec	XC6124C525MR-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZV	ec	XC6124C526MR-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZX	ec	XC6124C527MR-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZY	ec	XC6124C528MR-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
KZZ	ec	XC6124C529MR-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	SOT-25	28g9	VD23	6g	Tor
L0	-	ELM89403B	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6g	Elm
L0	-	R1121N201A	LVR-IC	LDO, Low noise, 2V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
L0	-	RN5RG40AA	LVR-IC	Ext. transistor, 4V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
L0	-	RT9168-15CBR	LVR-IC	LDO, 1.5V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
L0	ea	RN5RY301A	DC-DC-IC	VFM step-up, 3V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
L001	-	R3134Q10EA	Vdet-IC	1.0V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L002	-	R3134Q11EA	Vdet-IC	1.1V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L003	-	R3134Q12EA	Vdet-IC	1.2V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L004	-	R3134Q13EA	Vdet-IC	1.3V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L005	-	R3134Q14EA	Vdet-IC	1.4V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L006	-	R3134Q15EA	Vdet-IC	1.5V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L007	-	R3134Q16EA	Vdet-IC	1.6V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L008	-	R3134Q17EA	Vdet-IC	1.7V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L009	-	R3134Q18EA	Vdet-IC	1.8V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L00A	-	LP2980AIM5-3.3	LVR-IC	Ultra-LDO, 3.3V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L00B	-	LP2980IM5-3.3	LVR-IC	Ultra-LDO, 3.3V±1%, 50mA, +CE	SOT-23-5	28cx	VR4	6g	Nsc
L01	-	RP112N121D5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L010	-	R3134Q19EA	Vdet-IC	1.9V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L011	-	R3134Q20EA	Vdet-IC	2.0V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L012	-	R3134Q21EA	Vdet-IC	2.1V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L013	-	R3134Q22EA	Vdet-IC	2.2V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L014	-	R3134Q23EA	Vdet-IC	2.3V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L015	-	R3134Q24EA	Vdet-IC	2.4V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L016	-	R3134Q25EA	Vdet-IC	2.5V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L017	-	R3134Q26EA	Vdet-IC	2.6V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L018	-	R3134Q27EA	Vdet-IC	2.7V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L019	-	R3134Q28EA	Vdet-IC	2.8V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L01A	-	LP2980AIM5-5.0	LVR-IC	Ultra-LDO, 5.0V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L01B	-	LP2980IM5-5.0	LVR-IC	Ultra-LDO, 5.0V±1%, 50mA, +CE	SOT-23-5	28cx	VR4	6g	Nsc
L02	-	RP112N181D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L020	-	R3134Q29EA	Vdet-IC	2.9V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L021	-	R3134Q30EA	Vdet-IC	3.0V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L022	-	R3134Q31EA	Vdet-IC	3.1V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L023	-	R3134Q32EA	Vdet-IC	3.2V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L024	-	R3134Q33EA	Vdet-IC	3.3V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L025	-	R3134Q34EA	Vdet-IC	3.4V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L026	-	R3134Q35EA	Vdet-IC	3.5V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L027	-	R3134Q36EA	Vdet-IC	3.6V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L028	-	R3134Q37EA	Vdet-IC	3.7V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L029	-	R3134Q38EA	Vdet-IC	3.8V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L02A	-	LP2980AIM5-3.0	LVR-IC	Ultra-LDO, 3.0V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L02B	-	LP2980IM5-3.0	LVR-IC	Ultra-LDO, 3.0V±1%, 50mA, +CE	SOT-23-5	28cx	VR4	6g	Nsc
L03	-	RP112N281D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L030	-	R3134Q39EA	Vdet-IC	3.9V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L031	-	R3134Q40EA	Vdet-IC	4.0V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L032	-	R3134Q41EA	Vdet-IC	4.1V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L033	-	R3134Q42EA	Vdet-IC	4.2V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L034	-	R3134Q43EA	Vdet-IC	4.3V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L035	-	R3134Q44EA	Vdet-IC	4.4V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L036	-	R3134Q45EA	Vdet-IC	4.5V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L037	-	R3134Q46EA	Vdet-IC	4.6V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L038	-	R3134Q47EA	Vdet-IC	4.7V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L039	-	R3134Q48EA	Vdet-IC	4.8V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L03A	-	LP2981AIM5-5.0	LVR-IC	Ultra-LDO, +CE, 5V±0.5%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L03B	-	LP2981IM5-5.0	LVR-IC	Ultra-LDO, +CE, 5.0V±2%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L040	-	R3134Q49EA	Vdet-IC	4.9V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L041	-	R3134Q50EA	Vdet-IC	5.0V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L042	-	R3134Q23EA2	Vdet-IC	2.32V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L043	-	R3134Q26EA3	Vdet-IC	2.63V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L044	-	R3134Q29EA3	Vdet-IC	2.93V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L045	-	R3134Q30EA8	Vdet-IC	3.08V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L046	-	R3134Q43EA8	Vdet-IC	4.38V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L047	-	R3134Q46EA3	Vdet-IC	4.63V±1.8%, -Reset ODO, -MR	SC-88A	28z8	VD4	6ma	Ric
L04A	-	LP2981AIM5-3.3	LVR-IC	Ultra-LDO, +CE, 3.3V±0.5%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L04B	-	LP2981IM5-3.3	LVR-IC	Ultra-LDO, +CE, 3.3V±2%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L05A	-	LP2981AIM5-3.0	LVR-IC	Ultra-LDO, +CE, 3V±0.5%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L05B	-	LP2981IM5-3.0	LVR-IC	Ultra-LDO, +CE, 3.0V±2%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L09	-	82C09-AF5-B	Vdet-IC	0.9V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L09G	-	82C09G-AF5-B	Vdet-IC	0.9V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L09L	-	82C09L-AF5-B	Vdet-IC	0.9V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L0A	-	RP400N421A	DC-DC-IC	PWM st-up, 700kHz, 4.2V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L0A	-	XC6108N10AMR	Vdet-IC	1.0V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L0B	-	RP400N431A	DC-DC-IC	PWM st-up, 700kHz, 4.3V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L0B	-	XC6108N10BMR	Vdet-IC	1.0V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L0BA	-	LP2982AIM5-3.6	LVR-IC	Ultra-LDO, +CE, 3.6V±1%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L0BB	-	LP2982IM5-3.6	LVR-IC	Ultra-LDO, +CE, 3.6V±1.5%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L0C	-	RP400N441A	DC-DC-IC	PWM st-up, 700kHz, 4.4V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L0C	-	XC6108N10CMR	Vdet-IC	1.0V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L0CA	-	LP2981AIM5-2.5	LVR-IC	Ultra-LDO, +CE, 2.5V±0.5%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L0CB	-	LP2981IM5-2.5	LVR-IC	Ultra-LDO, +CE, 2.5V±2%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L0D	-	RP400N451A	DC-DC-IC	PWM st-up, 700kHz, 4.5V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L0D	-	XC6108N10DMR	Vdet-IC	1.0V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L0DA	-	LP2981AIM5-2.7	LVR-IC	Ultra-LDO, +CE, 2.7V±0.5%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L0DB	-	LP2981IM5-2.7	LVR-IC	Ultra-LDO, +CE, 2.7V±2%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L0E	-	RP400N461A	DC-DC-IC	PWM st-up, 700kHz, 4.6V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L0F	-	RP400N471A	DC-DC-IC	PWM st-up, 700kHz, 4.7V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L0G	-	RP400N481A	DC-DC-IC	PWM st-up, 700kHz, 4.8V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L0GA	-	LP2981AIM5-4.7	LVR-IC	Ultra-LDO, +CE, 4.7V±0.5%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L0GB	-	LP2981IM5-4.7	LVR-IC	Ultra-LDO, +CE, 4.7V±2%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L0H	-	RP400N491A	DC-DC-IC	PWM st-up, 700kHz, 4.9V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L0HA	-	LP2982AIM5-4.7	LVR-IC	Ultra-LDO, +CE, 4.7V±1%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L0HB	-	LP2982IM5-4.7	LVR-IC	Ultra-LDO, +CE, 4.7V±1.5%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L0J	-	RP400N501A	DC-DC-IC	PWM st-up, 700kHz, 5.0V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L0JA	-	LP2981AIM5-3.6	LVR-IC	Ultra-LDO, +CE, 3.6V±0.5%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L0JB	-	LP2981IM5-3.6	LVR-IC	Ultra-LDO, +CE, 3.6V±2%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L0KA	-	LP2985AIM5-2.8	LVR-IC	Ultra-LDO, 2.8V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0KB	-	LP2985IM5-2.8	LVR-IC	Ultra-LDO, 2.8V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0NA	-	LP2980AIM5-2.5	LVR-IC	Ultra-LDO, 2.5V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L0NB	-	LP2980IM5-2.5	LVR-IC	Ultra-LDO, 2.5V±1%, 50mA, +CE	SOT-23-5	28cx	VR4	6g	Nsc
L0OA	-	LP2985AIM5-3.0	LVR-IC	Ultra-LDO, 3.0V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0OB	-	LP2985IM5-3.0	LVR-IC	Ultra-LDO, 3.0V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L0PA	-	LP2985AIM5-3.1	LVR-IC	Ultra-LDO, 3.1V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0PB	-	LP2985IM5-3.1	LVR-IC	Ultra-LDO, 3.1V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0QA	-	LP2985AIM5-3.2	LVR-IC	Ultra-LDO, 3.2V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0QB	-	LP2985IM5-3.2	LVR-IC	Ultra-LDO, 3.2V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0RA	-	LP2985AIM5-3.3	LVR-IC	Ultra-LDO, 3.2V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0RB	-	LP2985IM5-3.3	LVR-IC	Ultra-LDO, 3.3V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0SA	-	LP2985AIM5-3.6	LVR-IC	Ultra-LDO, 3.6V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0SB	-	LP2985IM5-3.6	LVR-IC	Ultra-LDO, 3.6V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0TA	-	LP2985AIM5-4.0	LVR-IC	Ultra-LDO, 4.0V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0TB	-	LP2985IM5-4.0	LVR-IC	Ultra-LDO, 4.0V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0UA	-	LP2985AIM5-5.0	LVR-IC	Ultra-LDO, 5.0V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0UB	-	LP2985IM5-5.0	LVR-IC	Ultra-LDO, 5.0V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0VA	-	LP2981AIM5-2.9	LVR-IC	Ultra-LDO, +CE, 2.9V±0.5%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L0VB	-	LP2981IM5-2.9	LVR-IC	Ultra-LDO, +CE, 2.9V±2%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L0XA	-	LP2980AIM5-4.5	LVR-IC	Ultra-LDO, 4.5V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L0XB	-	LP2980IM5-4.5	LVR-IC	Ultra-LDO, 4.5V±1%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L0YA	-	LP2985AIM5-3.8	LVR-IC	Ultra-LDO, 3.8V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0YB	-	LP2985IM5-3.8	LVR-IC	Ultra-LDO, 3.8V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
L0ZA	-	LP2981AIM5-4.0	LVR-IC	Ultra-LDO, +CE, 4V±0.5%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L0ZB	-	LP2981IM5-4.0	LVR-IC	Ultra-LDO, +CE, 4.0V±2%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L1	-	HD74LV1G00ACM	CMOS-Log	2-input NAND gate	CMPAK-5	28	Log1	6a	Ren
L1	-	HD74LV1G00AVS	CMOS-Log	2-input NAND gate	VSON-5	30	Log1	6a	Ren
L1	-	NL17SZ00DF	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6b	Ons
L1	-	R1121N211A	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
L1	-	RN5RG41AA	LVR-IC	Ext. transistor, 4.1V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
L1	-	RT9168-16CBR	LVR-IC	LDO, 1.6V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
L1	-	TC7SL00F	CMOS-Log	2-input NAND gate	SSOP-5	28	Log1	6a	Tos
L1	-	TC7SL00FU	CMOS-Log	2-input NAND gate	SC-70-5	28	Log1	6a	Tos
L1	ea	RN5RY311A	DC-DC-IC	VFM step-up, 3.1V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
L10	-	82C10-AF5-B	Vdet-IC	1.0V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L10	-	R1224N102L	DC-DC-IC	PWM/VFM step-down, 1V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
L10	eb	TC125101ECT	DC-DC-IC	PFM step-up, 1.0V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L10G	-	82C10G-AF5-B	Vdet-IC	1.0V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L10L	-	82C10L-AF5-B	Vdet-IC	1.0V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L11	-	82C11-AF5-B	Vdet-IC	1.1V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L11	eb	TC125111ECT	DC-DC-IC	PFM step-up, 1.1V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L110	ek	XC6366B101MR	DC-DC-IC	PWM/PFM st-down, 100kHz, Adj. 1.5..6V±2.5%, 1A, +CE	SOT-25	28zn	DC18	6g	Tor
L11G	-	82C11G-AF5-B	Vdet-IC	1.1V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L11L	-	82C11L-AF5-B	Vdet-IC	1.1V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L12	-	82C12-AF5-B	Vdet-IC	1.2V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L12	-	R1224N122L	DC-DC-IC	PWM/VFM step-down, 1.2V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
L12	-	RP112N121D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L12	eb	TC125121ECT	DC-DC-IC	PFM step-up, 1.2V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L12A	-	LP2980AIM5-2.9	LVR-IC	Ultra-LDO, 2.9V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L12B	-	LP2980IM5-2.9	LVR-IC	Ultra-LDO, 2.9V±1%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L12G	-	82C12G-AF5-B	Vdet-IC	1.2V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L12L	-	82C12L-AF5-B	Vdet-IC	1.2V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L13	-	82C13-AF5-B	Vdet-IC	1.3V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L13	-	RP112N131D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L13	-	TK71613SCL	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L13	eb	TC125131ECT	DC-DC-IC	PFM step-up, 1.3V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L13A	-	LP2980AIM5-2.8	LVR-IC	Ultra-LDO, 2.8V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L13B	-	LP2980IM5-2.8	LVR-IC	Ultra-LDO, 2.8V±1%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L13G	-	82C13G-AF5-B	Vdet-IC	1.3V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L13L	-	82C13L-AF5-B	Vdet-IC	1.3V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L14	-	82C14-AF5-B	Vdet-IC	1.4V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L14	-	RP112N141D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L14	-	TK71614SCL	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L14	eb	TC125141ECT	DC-DC-IC	PFM step-up, 1.4V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L14G	-	82C14G-AF5-B	Vdet-IC	1.4V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L14L	-	82C14L-AF5-B	Vdet-IC	1.4V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L15	-	82C15-AF5-B	Vdet-IC	1.5V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L15	-	R1224N152L	DC-DC-IC	PWM/VFM step-down, 1.5V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
L15	-	RP112N151D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L15	-	TK71615SCL	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L15	eb	TC125151ECT	DC-DC-IC	PFM step-up, 1.5V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L15G	-	82C15G-AF5-B	Vdet-IC	1.5V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L15L	-	82C15L-AF5-B	Vdet-IC	1.5V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L16	-	82C16-AF5-B	Vdet-IC	1.6V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L16	-	RP112N161D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L16	-	TK71616SCL	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L16	eb	TC125161ECT	DC-DC-IC	PFM step-up, 1.6V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L16G	-	82C16G-AF5-B	Vdet-IC	1.6V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L16L	-	82C16L-AF5-B	Vdet-IC	1.6V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L17	-	82C17-AF5-B	Vdet-IC	1.7V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L17	-	RP112N171D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L17	-	TK71617SCL	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L17	eb	TC125171ECT	DC-DC-IC	PFM step-up, 1.7V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L17G	-	82C17G-AF5-B	Vdet-IC	1.7V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L17L	-	82C17L-AF5-B	Vdet-IC	1.7V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L18	-	82C18-AF5-B	Vdet-IC	1.8V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L18	-	R1224N182L	DC-DC-IC	PWM/VFM step-down, 1.8V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
L18	-	RP112N181D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L18	-	TK71618SCL	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L18	eb	TC125181ECT	DC-DC-IC	PFM step-up, 1.8V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L18A	-	LP2982AIM5-5.0	LVR-IC	Ultra-LDO, +CE, 5.0V±1%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L18B	-	LP2982IM5-5.0	LVR-IC	Ultra-LDO, +CE, 5.0V±1.5%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L18G	-	82C18G-AF5-B	Vdet-IC	1.8V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L18L	-	82C18L-AF5-B	Vdet-IC	1.8V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L19	-	82C19-AF5-B	Vdet-IC	1.9V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L19	-	RP112N191D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L19	-	TK71619SCL	LVR-IC	LDO, 1.9V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L19	eb	TC125191ECT	DC-DC-IC	PFM step-up, 1.9V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L19A	-	LP2982AIM5-3.3	LVR-IC	Ultra-LDO, +CE, 3.3V±1%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L19B	-	LP2982IM5-3.3	LVR-IC	Ultra-LDO, +CE, 3.3V±1.5%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L19G	-	82C19G-AF5-B	Vdet-IC	1.9V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L19L	-	82C19L-AF5-B	Vdet-IC	1.9V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L1A	-	RP400N421C	DC-DC-IC	PWM st-up, 700kHz, 4.2V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L1A	-	XC6108N11AMR	Vdet-IC	1.1V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L1B	-	RP400N431C	DC-DC-IC	PWM st-up, 700kHz, 4.3V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L1B	-	XC6108N11BMR	Vdet-IC	1.1V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L1C	-	RP400N441C	DC-DC-IC	PWM st-up, 700kHz, 4.4V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L1C	-	XC6108N11CMR	Vdet-IC	1.1V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L1D	-	RP400N451C	DC-DC-IC	PWM st-up, 700kHz, 4.5V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L1D	-	XC6108N11DMR	Vdet-IC	1.1V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L1E	-	RP400N461C	DC-DC-IC	PWM st-up, 700kHz, 4.6V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L1F	-	RP400N471C	DC-DC-IC	PWM st-up, 700kHz, 4.7V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L1G	-	RP400N481C	DC-DC-IC	PWM st-up, 700kHz, 4.8V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L1H	-	RP400N491C	DC-DC-IC	PWM st-up, 700kHz, 4.9V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L1J	-	RP400N501C	DC-DC-IC	PWM st-up, 700kHz, 5.0V±2%, 200mA, +CE	SOT-23-5	28zr	DC19	6g	Ric
L1P	-	ADP3309ARTZ-2.7-R	LVR-IC	LDO, 2.7V±1.2%, 100mA, -Shutdown, -Error	SOT-23-5	28c7	VR8	6a	Ad
L1Q	-	ADP3309ARTZ-3.3-R	LVR-IC	LDO, 3.3V±1.2%, 100mA, -Shutdown, -Error	SOT-23-5	28c7	VR8	6a	Ad
L1R	-	ADP3309ARTZ-2.85R	LVR-IC	LDO, 2.85V±1.2%, 100mA, -Shutdown, -Error	SOT-23-5	28c7	VR8	6a	Ad
L1S	-	ADP3309ARTZ-2.9-R	LVR-IC	LDO, 2.9V±1.2%, 100mA, -Shutdown, -Error	SOT-23-5	28c7	VR8	6a	Ad
L1T	-	ADP3309ARTZ-3.6-R	LVR-IC	LDO, 3.6V±1.2%, 100mA, -Shutdown, -Error	SOT-23-5	28c7	VR8	6a	Ad
L2	-	HD74LV1G08ACM	CMOS-Log	2-input AND gate	CMPAK-5	28	Log3	6a	Ren
L2	-	HD74LV1G08AVS	CMOS-Log	2-input AND gate	VSON-5	30	Log3	6a	Ren
L2	-	NL17SZ08DF	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6b	Ons
L2	-	R1121N221A	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
L2	-	RN5RG42AA	LVR-IC	Ext. transistor, 4.2V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
L2	-	RT9168-17CBR	LVR-IC	LDO, 1.7V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
L2	-	TC7SL08F	CMOS-Log	2-input AND gate	SSOP-5	28	Log3	6a	Tos
L2	-	TC7SL08FU	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6a	Tos
L2	ea	RN5RY321A	DC-DC-IC	VFM step-up, 3.2V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
L20	-	82C20-AF5-B	Vdet-IC	2.0V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L20	-	RP112N201D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L20	-	TK71620SCL	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L20	eb	TC125201ECT	DC-DC-IC	PFM step-up, 2.0V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L20	eh	XC6382C201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L20	er	XC6385C201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L20A	-	LP2982AIM5-3.0	LVR-IC	Ultra-LDO, +CE, 3.0V±1%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L20B	-	LP2982IM5-3.0	LVR-IC	Ultra-LDO, +CE, 3.0V±1.5%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L20G	-	82C20G-AF5-B	Vdet-IC	2.0V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L20L	-	82C20L-AF5-B	Vdet-IC	2.0V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L21	-	82C21-AF5-B	Vdet-IC	2.1V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L21	-	RP112N211D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L21	-	TK71621SCL	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L21	eb	TC125211ECT	DC-DC-IC	PFM step-up, 2.1V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L21	eh	XC6382C211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L21	er	XC6385C211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L210	ek	XC6366B102MR	DC-DC-IC	PWM/PFM st-down, 180kHz, Adj. 1.5..6V±2.5%, 1A, +CE	SOT-25	28zn	DC18	6g	Tor
L21A	-	LP2980AIM5-3.8	LVR-IC	Ultra-LDO, 3.8V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L21B	-	LP2980IM5-3.8	LVR-IC	Ultra-LDO, 3.8V±1%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L21G	-	82C21G-AF5-B	Vdet-IC	2.1V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L21L	-	82C21L-AF5-B	Vdet-IC	2.1V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L22	-	82C22-AF5-B	Vdet-IC	2.2V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L22	-	RP112N221D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L22	-	TK71622SCL	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L22	eb	TC125221ECT	DC-DC-IC	PFM step-up, 2.2V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L22	eh	XC6382C221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L22	er	XC6385C221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L22G	-	82C22G-AF5-B	Vdet-IC	2.2V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L22L	-	82C22L-AF5-B	Vdet-IC	2.2V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L23	-	82C23-AF5-B	Vdet-IC	2.3V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L23	-	LP5951MF-1.3	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6a	Nsc
L23	-	RP112N231D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L23	-	TK71623SCL	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L23	eb	TC125231ECT	DC-DC-IC	PFM step-up, 2.3V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L23	eh	XC6382C231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L23	er	XC6385C231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L23G	-	82C23G-AF5-B	Vdet-IC	2.3V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L23L	-	82C23L-AF5-B	Vdet-IC	2.3V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L24	-	82C24-AF5-B	Vdet-IC	2.4V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L24	-	RP112N241D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L24	-	TK71624SCL	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L24	eb	TC125241ECT	DC-DC-IC	PFM step-up, 2.4V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L24	eh	XC6382C241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L24	er	XC6385C241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L24G	-	82C24G-AF5-B	Vdet-IC	2.4V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L24L	-	82C24L-AF5-B	Vdet-IC	2.4V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L25	-	82C25-AF5-B	Vdet-IC	2.5V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L25	-	MC33761SNT1-25	LVR-IC	LDO, ULN, +CE, 2.5V±1.5%, 80mA	SOT-23-5	28cx	VR4	6b	Ons
L25	-	R1224N252L	DC-DC-IC	PWM/VFM step-down, 2.5V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
L25	-	RP112N251D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L25	-	TK71625SCL	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L25	eb	TC125251ECT	DC-DC-IC	PFM step-up, 2.5V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L25	eh	XC6382C251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L25	er	XC6385C251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L25A	-	LP2980AIM5-4.0	LVR-IC	Ultra-LDO, 4.0V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L25B	-	LP2980IM5-4.0	LVR-IC	Ultra-LDO, 4.0V±1%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L25G	-	82C25G-AF5-B	Vdet-IC	2.5V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L25L	-	82C25L-AF5-B	Vdet-IC	2.5V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L26	-	82C26-AF5-B	Vdet-IC	2.6V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L26	-	RP112N261D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L26	-	TK71626SCL	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L26	eb	TC125261ECT	DC-DC-IC	PFM step-up, 2.6V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L26	eh	XC6382C261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L26	er	XC6385C261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L26A	-	LP2980AIM5-2.7	LVR-IC	Ultra-LDO, 2.7V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L26B	-	LP2980IM5-2.7	LVR-IC	Ultra-LDO, 2.7V±1%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L26G	-	82C26G-AF5-B	Vdet-IC	2.6V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L26L	-	82C26L-AF5-B	Vdet-IC	2.6V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L27	-	82C27-AF5-B	Vdet-IC	2.7V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L27	-	RP112N271D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L27	-	TK71627SCL	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L27	eb	TC125271ECT	DC-DC-IC	PFM step-up, 2.7V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L27	eh	XC6382C271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L27	er	XC6385C271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L27A	-	LP2980AIM5-3.5	LVR-IC	Ultra-LDO, 3.5V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L27B	-	LP2980IM5-3.5	LVR-IC	Ultra-LDO, 3.5V±1%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L27G	-	82C27G-AF5-B	Vdet-IC	2.7V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L27L	-	82C27L-AF5-B	Vdet-IC	2.7V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L28	-	82C28-AF5-B	Vdet-IC	2.8V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L28	-	MC33761SNT1-28	LVR-IC	LDO, ULN, +CE, 2.8V±1.5%, 80mA	SOT-23-5	28cx	VR4	6b	Ons
L28	-	RP112N281D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L28	-	TK71628SCL	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L28	eb	TC125281ECT	DC-DC-IC	PFM step-up, 2.8V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L28	eh	XC6382C281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L28	er	XC6385C281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L28A	-	LP2980AIM5-3.6	LVR-IC	Ultra-LDO, 3.6V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L28B	-	LP2980IM5-3.6	LVR-IC	Ultra-LDO, 3.6V±1%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L28G	-	82C28G-AF5-B	Vdet-IC	2.8V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L28L	-	82C28L-AF5-B	Vdet-IC	2.8V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L29	-	82C29-AF5-B	Vdet-IC	2.9V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L29	-	RP112N291D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L29	-	TK71629SCL	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L29	eb	TC125291ECT	DC-DC-IC	PFM step-up, 2.9V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L29	eh	XC6382C291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L29	er	XC6385C291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L29A	-	LP2982AIM5-4.0	LVR-IC	Ultra-LDO, +CE, 4.0V±1%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L29B	-	LP2982IM5-4.0	LVR-IC	Ultra-LDO, +CE, 4.0V±1.5%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L29G	-	82C29G-AF5-B	Vdet-IC	2.9V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L29L	-	82C29L-AF5-B	Vdet-IC	2.9V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L2A	-	RP400N421B	DC-DC-IC	PWM st-up, 700kHz, 4.2V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
L2A	-	XC6108N12AMR	Vdet-IC	1.2V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L2B	-	LP5951MF-1.5	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6a	Nsc
L2B	-	RP400N431B	DC-DC-IC	PWM st-up, 700kHz, 4.3V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
L2B	-	XC6108N12BMR	Vdet-IC	1.2V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L2C	-	RP400N441B	DC-DC-IC	PWM st-up, 700kHz, 4.4V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
L2C	-	XC6108N12CMR	Vdet-IC	1.2V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L2D	-	RP400N451B	DC-DC-IC	PWM st-up, 700kHz, 4.5V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
L2D	-	XC6108N12DMR	Vdet-IC	1.2V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L2E	-	RP400N461B	DC-DC-IC	PWM st-up, 700kHz, 4.6V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
L2F	-	RP400N471B	DC-DC-IC	PWM st-up, 700kHz, 4.7V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
L2G	-	RP400N481B	DC-DC-IC	PWM st-up, 700kHz, 4.8V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
L2H	-	RP400N491B	DC-DC-IC	PWM st-up, 700kHz, 4.9V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
L2J	-	RP400N501B	DC-DC-IC	PWM st-up, 700kHz, 5.0V±2%, 200mA	SOT-23-5	28zs	DC4	6g	Ric
L3	-	HD74LV1G02ACM	CMOS-Log	2-input NOR gate	CMPAK-5	28	Log2	6a	Ren
L3	-	HD74LV1G02AVS	CMOS-Log	2-input NOR gate	VSON-5	30	Log2	6a	Ren
L3	-	NL17SZ02DF	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6b	Ons
L3	-	R1121N231A	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
L3	-	RN5RG43AA	LVR-IC	Ext. transistor, 4.3V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
L3	-	RT9168-18CBR	LVR-IC	LDO, 1.8V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
L3	-	TC7SL02F	CMOS-Log	2-input NOR gate	SSOP-5	28	Log2	6a	Tos
L3	-	TC7SL02FU	CMOS-Log	2-input NOR gate	SC-70-5	28	Log2	6a	Tos
L3	ea	RN5RY331A	DC-DC-IC	VFM step-up, 3.3V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
L30	-	82C30-AF5-B	Vdet-IC	3.0V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L30	-	MC33761SNT1-30	LVR-IC	LDO, ULN, +CE, 3V±1.5%, 80mA	SOT-23-5	28cx	VR4	6b	Ons
L30	-	R1224N302L	DC-DC-IC	PWM/VFM step-down, 3V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
L30	-	RP112N301D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L30	-	TK71630SCL	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L30	eb	TC125301ECT	DC-DC-IC	PFM step-up, 3.0V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L30	eh	XC6382C301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L30	er	XC6385C301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L30A	-	LP2980AIM5-3.1	LVR-IC	Ultra-LDO, 3.1V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L30B	-	LP2980IM5-3.1	LVR-IC	Ultra-LDO, 3.1V±1%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L30G	-	82C30G-AF5-B	Vdet-IC	3.0V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L30L	-	82C30L-AF5-B	Vdet-IC	3.0V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L31	-	82C31-AF5-B	Vdet-IC	3.1V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L31	-	RP112N311D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L31	-	TK71631SCL	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L31	eb	TC125311ECT	DC-DC-IC	PFM step-up, 3.1V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L31	eh	XC6382C311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L31	er	XC6385C311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L310	ek	XC6366B103MR	DC-DC-IC	PWM/PFM st-down, 300kHz, Adj. 1.5..6V±2.5%, 1A, +CE	SOT-25	28zn	DC18	6g	Tor
L31A	-	LP2980AIM5-3.2	LVR-IC	Ultra-LDO, 3.2V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L31B	-	LP2980IM5-3.2	LVR-IC	Ultra-LDO, 3.2V±1%, 50mA, +CE	SOT-23-5	28cx	VR4	6g	Nsc
L31G	-	82C31G-AF5-B	Vdet-IC	3.1V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L31L	-	82C31L-AF5-B	Vdet-IC	3.1V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L32	-	82C32-AF5-B	Vdet-IC	3.2V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L32	-	RP112N321D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L32	-	TK71632SCL	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L32	eb	TC125321ECT	DC-DC-IC	PFM step-up, 3.2V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L32	eh	XC6382C321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L32	er	XC6385C321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L32G	-	82C32G-AF5-B	Vdet-IC	3.2V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L32L	-	82C32L-AF5-B	Vdet-IC	3.2V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L33	-	82C33-AF5-B	Vdet-IC	3.3V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L33	-	R1224N332L	DC-DC-IC	PWM/VFM step-down, 3.3V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
L33	-	RP112N331D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L33	-	TK71633SCL	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L33	eb	TC125331ECT	DC-DC-IC	PFM step-up, 3.3V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L33	eh	XC6382C331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L33	er	XC6385C331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L33G	-	82C33G-AF5-B	Vdet-IC	3.3V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L33L	-	82C33L-AF5-B	Vdet-IC	3.3V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L34	-	82C34-AF5-B	Vdet-IC	3.4V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L34	-	RP112N341D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L34	-	TK71634SCL	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L34	eb	TC125341ECT	DC-DC-IC	PFM step-up, 3.4V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L34	eh	XC6382C341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L34	er	XC6385C341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L34G	-	82C34G-AF5-B	Vdet-IC	3.4V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L34L	-	82C34L-AF5-B	Vdet-IC	3.4V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L35	-	82C35-AF5-B	Vdet-IC	3.5V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L35	-	RP112N351D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L35	-	TK71635SCL	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L35	eb	TC125351ECT	DC-DC-IC	PFM step-up, 3.5V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L35	eh	XC6382C351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L35	er	XC6385C351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L35A	-	LP2981AIM5-3.2	LVR-IC	Ultra-LDO, +CE, 3.2V±0.5%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L35B	-	LP2981IM5-3.2	LVR-IC	Ultra-LDO, +CE, 3.2V±2%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L35G	-	82C35G-AF5-B	Vdet-IC	3.5V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L35L	-	82C35L-AF5-B	Vdet-IC	3.5V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L36	-	82C36-AF5-B	Vdet-IC	3.6V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L36	-	RP112N361D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L36	-	TK71636SCL	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L36	eb	TC125361ECT	DC-DC-IC	PFM step-up, 3.6V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L36	eh	XC6382C361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L36	er	XC6385C361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L36A	-	LP2981AIM5-3.8	LVR-IC	Ultra-LDO, +CE, 3.8V±0.5%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L36B	-	LP2981IM5-3.8	LVR-IC	Ultra-LDO, +CE, 3.8V±2%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L36G	-	82C36G-AF5-B	Vdet-IC	3.6V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L36L	-	82C36L-AF5-B	Vdet-IC	3.6V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L37	-	82C37-AF5-B	Vdet-IC	3.7V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L37	-	RP112N371D	LVR-IC	LDO, 3.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L37	-	TK71637SCL	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L37	eb	TC125371ECT	DC-DC-IC	PFM step-up, 3.7V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L37	eh	XC6382C371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L37	er	XC6385C371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L37A	-	LP2980AIM5-4.7	LVR-IC	Ultra-LDO, 4.7V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L37B	-	LP2980IM5-4.7	LVR-IC	Ultra-LDO, 4.7V±1%, 50mA, +CE	SOT-23-5	28cx	VR4	6g	Nsc
L37G	-	82C37G-AF5-B	Vdet-IC	3.7V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L37L	-	82C37L-AF5-B	Vdet-IC	3.7V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L38	-	82C38-AF5-B	Vdet-IC	3.8V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L38	-	RP112N381D	LVR-IC	LDO, 3.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L38	-	TK71638SCL	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L38	eb	TC125381ECT	DC-DC-IC	PFM step-up, 3.8V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L38	eh	XC6382C381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L38	er	XC6385C381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L38A	-	LP2981AIM5-3.1	LVR-IC	Ultra-LDO, +CE, 3.1V±0.5%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L38B	-	LP2981IM5-3.1	LVR-IC	Ultra-LDO, +CE, 3.1V±2%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L38G	-	82C38G-AF5-B	Vdet-IC	3.8V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L38L	-	82C38L-AF5-B	Vdet-IC	3.8V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L39	-	82C39-AF5-B	Vdet-IC	3.9V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L39	-	RP112N391D	LVR-IC	LDO, 3.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L39	-	TK71639SCL	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L39	eb	TC125391ECT	DC-DC-IC	PFM step-up, 3.9V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L39	eh	XC6382C391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L39	er	XC6385C391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L39G	-	82C39G-AF5-B	Vdet-IC	3.9V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L39L	-	82C39L-AF5-B	Vdet-IC	3.9V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L3A	-	XC6108N13AMR	Vdet-IC	1.3V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L3B	-	LP5951MF-1.8	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6a	Nsc
L3B	-	XC6108N13BMR	Vdet-IC	1.3V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L3C	-	XC6108N13CMR	Vdet-IC	1.3V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L3D	-	XC6108N13DMR	Vdet-IC	1.3V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L3S	-	ADP1712AUJZ-0.75R	LVR-IC	LDO, 0.75V±2%, 300mA, +CE, +CE, Soft start	TSOT-23-5	28vrx	VR7	6a	Ad
L3T	-	ADP1712AUJZ-0.8-R	LVR-IC	LDO, 0.8V±2%, 300mA, +CE, +CE, Soft start	TSOT-23-5	28vrx	VR7	6a	Ad
L3U	-	ADP1712AUJZ-0.85R	LVR-IC	LDO, 0.85V±2%, 300mA, +CE, +CE, Soft start	TSOT-23-5	28vrx	VR7	6a	Ad



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L3V	-	ADP1712AUJZ-0.9-R	LVR-IC	LDO, 0.9V±2%, 300mA, +CE, +CE, Soft start	TSOT-23-5	28vrx	VR7	6a	Ad
L3W	-	ADP1712AUJZ-0.95R	LVR-IC	LDO, 0.95V±2%, 300mA, +CE, +CE, Soft start	TSOT-23-5	28vrx	VR7	6a	Ad
L3X	-	ADP1712AUJZ-1.0-R	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, +CE, Soft start	TSOT-23-5	28vrx	VR7	6a	Ad
L3Y	-	ADP1712AUJZ-1.05R	LVR-IC	LDO, 1.05V±2%, 300mA, +CE, +CE, Soft start	TSOT-23-5	28vrx	VR7	6a	Ad
L3Z	-	ADP1712AUJZ-1.1-R	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, +CE, Soft start	TSOT-23-5	28vrx	VR7	6a	Ad
L4	-	HD74LV1G32ACM	CMOS-Log	2-input OR gate	CMPAK-5	28	Log4	6a	Ren
L4	-	HD74LV1G32AVS	CMOS-Log	2-input OR gate	VSON-5	30	Log4	6a	Ren
L4	-	KTC601E-Y	Si-npn	Dual GP, 50V, 150mA, 100mW, B=120..240, 80MHz	TESV	30/T11	T11	6l	Kec
L4	-	KTC601U-Y	Si-npn	Dual GP, 50V, 150mA, 100mW, B=120..240, 80MHz	USV	28	T11	6l	Kec
L4	-	NL17SZ32DF	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6b	Ons
L4	-	R1121N241A	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
L4	-	RN5RG44AA	LVR-IC	Ext. transistor, 4.4V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
L4	-	RT9168-19CBR	LVR-IC	LDO, 1.9V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
L4	-	TC7SL32F	CMOS-Log	2-input OR gate	SSOP-5	28	Log4	6a	Tos
L4	-	TC7SL32FU	CMOS-Log	2-input OR gate	SC-70-5	28	Log4	6a	Tos
L4	ea	RN5RY341A	DC-DC-IC	VFM step-up, 3.4V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
L40	-	82C40-AF5-B	Vdet-IC	4.0V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L40	-	RP112N401D	LVR-IC	LDO, 4.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L40	-	TK71640SCL	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L40	eb	TC125401ECT	DC-DC-IC	PFM step-up, 4.0V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L40	eh	XC6382C401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L40	er	XC6385C401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L40G	-	82C40G-AF5-B	Vdet-IC	4.0V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L40L	-	82C40L-AF5-B	Vdet-IC	4.0V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L41	-	82C41-AF5-B	Vdet-IC	4.1V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L41	-	RP112N411D	LVR-IC	LDO, 4.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L41	-	TK71641SCL	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L41	eb	TC125411ECT	DC-DC-IC	PFM step-up, 4.1V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L41	eh	XC6382C411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L41	er	XC6385C411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L410	-	MIC5238-1.0BM5	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	SOT-23-5	28ze	VR11	6g	Mcr
L410	fb	MIC5238-1.0YM5	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, Pb-Free	SOT-23-5	28ze	VR11	6g	Mcr
L411	-	MIC5238-1.1BM5	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-23-5	28ze	VR11	6g	Mcr
L411	fb	MIC5238-1.1YM5	LVR-IC	LDO, 1.1V±2%, 150mA, +CE, Pb-Free	SOT-23-5	28ze	VR11	6g	Mcr
L413	-	MIC5238-1.3BM5	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-23-5	28ze	VR11	6g	Mcr
L413	fb	MIC5238-1.3YM5	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, Pb-Free	SOT-23-5	28ze	VR11	6g	Mcr
L41G	-	82C41G-AF5-B	Vdet-IC	4.1V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L41L	-	82C41L-AF5-B	Vdet-IC	4.1V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L42	-	82C42-AF5-B	Vdet-IC	4.2V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L42	-	RP112N421D	LVR-IC	LDO, 4.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L42	-	TK71642SCL	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L42	eb	TC125421ECT	DC-DC-IC	PFM step-up, 4.2V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L42	eh	XC6382C421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L42	er	XC6385C421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L42G	-	82C42G-AF5-B	Vdet-IC	4.2V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L42L	-	82C42L-AF5-B	Vdet-IC	4.2V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L43	-	82C43-AF5-B	Vdet-IC	4.3V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L43	-	RP112N431D	LVR-IC	LDO, 4.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L43	-	TK71643SCL	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L43	eb	TC125431ECT	DC-DC-IC	PFM step-up, 4.3V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L43	eh	XC6382C431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L43	er	XC6385C431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L43G	-	82C43G-AF5-B	Vdet-IC	4.3V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L43L	-	82C43L-AF5-B	Vdet-IC	4.3V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L44	-	82C44-AF5-B	Vdet-IC	4.4V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L44	-	RP112N441D	LVR-IC	LDO, 4.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L44	-	TK71644SCL	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L44	eb	TC125441ECT	DC-DC-IC	PFM step-up, 4.4V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L44	eh	XC6382C441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L44	er	XC6385C441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L44G	-	82C44G-AF5-B	Vdet-IC	4.4V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L44L	-	82C44L-AF5-B	Vdet-IC	4.4V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L45	-	82C45-AF5-B	Vdet-IC	4.5V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L45	-	RP112N451D	LVR-IC	LDO, 4.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L45	-	TK71645SCL	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L45	eb	TC125451ECT	DC-DC-IC	PFM step-up, 4.5V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L45	eh	XC6382C451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L45	er	XC6385C451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L45G	-	82C45G-AF5-B	Vdet-IC	4.5V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L45L	-	82C45L-AF5-B	Vdet-IC	4.5V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L46	-	82C46-AF5-B	Vdet-IC	4.6V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L46	-	RP112N461D	LVR-IC	LDO, 4.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L46	-	TK71646SCL	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L46	eb	TC125461ECT	DC-DC-IC	PFM step-up, 4.6V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L46	eh	XC6382C461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L46	er	XC6385C461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L46G	-	82C46G-AF5-B	Vdet-IC	4.6V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L46L	-	82C46L-AF5-B	Vdet-IC	4.6V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L47	-	82C47-AF5-B	Vdet-IC	4.7V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L47	-	RP112N471D	LVR-IC	LDO, 4.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L47	-	TK71647SCL	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L47	eb	TC125471ECT	DC-DC-IC	PFM step-up, 4.7V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L47	eh	XC6382C471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L47	er	XC6385C471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L47G	-	82C47G-AF5-B	Vdet-IC	4.7V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L47L	-	82C47L-AF5-B	Vdet-IC	4.7V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L48	-	82C48-AF5-B	Vdet-IC	4.8V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L48	-	RP112N481D	LVR-IC	LDO, 4.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
L48	-	TK71648SCL	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L48	eb	TC125481ECT	DC-DC-IC	PFM step-up, 4.8V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L48	eh	XC6382C481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L48	er	XC6385C481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L48A	-	LP2980AIM5-2.6	LVR-IC	Ultra-LDO, 2.6V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L48B	-	LP2980IM5-2.6	LVR-IC	Ultra-LDO, 2.6V±1%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
L48G	-	82C48G-AF5-B	Vdet-IC	4.8V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L48L	-	82C48L-AF5-B	Vdet-IC	4.8V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L49	-	82C49-AF5-B	Vdet-IC	4.9V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L49	-	TK71649SCL	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L49	eb	TC125491ECT	DC-DC-IC	PFM step-up, 4.9V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L49	eh	XC6382C491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L49	er	XC6385C491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L49G	-	82C49G-AF5-B	Vdet-IC	4.9V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L49L	-	82C49L-AF5-B	Vdet-IC	4.9V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L4A	-	XC6108N14AMR	Vdet-IC	1.4V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L4B	-	LP5951MF-2.0	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6a	Nsc
L4B	-	XC6108N14BMR	Vdet-IC	1.4V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L4C	-	XC6108N14CMR	Vdet-IC	1.4V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L4D	-	XC6108N14DMR	Vdet-IC	1.4V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L4H	-	ADP1712AUJZ-1.15R	LVR-IC	LDO, 1.15V±2%, 300mA, +CE, +CE, Soft start	TSOT-23-5	28vrx	VR7	6a	Ad
L4J	-	ADP1712AUJZ-1.2-R	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, +CE, Soft start	TSOT-23-5	28vrx	VR7	6a	Ad
L4K	-	ADP1712AUJZ-1.3-R	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, +CE, Soft start	TSOT-23-5	28vrx	VR7	6a	Ad
L4L	-	ADP1712AUJZ-1.5-R	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, +CE, Soft start	TSOT-23-5	28vrx	VR7	6a	Ad
L4M	-	ADP1712AUJZ-1.8-R	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, +CE, Soft start	TSOT-23-5	28vrx	VR7	6a	Ad
L4N	-	ADP1712AUJZ-2.5-R	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, +CE, Soft start	TSOT-23-5	28vrx	VR7	6a	Ad
L4P	-	ADP1712AUJZ-3.0-R	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, +CE, Soft start	TSOT-23-5	28vrx	VR7	6a	Ad
L4Q	-	ADP1712AUJZ-3.3-R	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, +CE, Soft start	TSOT-23-5	28vrx	VR7	6a	Ad
L4R	-	ADP1712AUJZ-R	LVR-IC	LDO, Adjustable 08V..5.0V, 300mA, +CE, Soft start	TSOT-23-5	28sg	VR5	6a	Ad
L4U	-	ADP1713AUJZ-0.75R	LVR-IC	LDO, 0.75V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Ad
L4V	-	ADP1713AUJZ-0.8-R	LVR-IC	LDO, 0.8V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Ad
L4W	-	ADP1713AUJZ-0.85R	LVR-IC	LDO, 0.85V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Ad
L4X	-	ADP1713AUJZ-0.9-R	LVR-IC	LDO, 0.9V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Ad
L4Y	-	ADP1713AUJZ-0.95R	LVR-IC	LDO, 0.95V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Ad
L4Z	-	ADP1713AUJZ-1.0-R	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Ad
L5	-	HD74LV1G04ACM	CMOS-Log	Inverter	CMPAK-5	28	Log6	6a	Ren
L5	-	HD74LV1G04AVS	CMOS-Log	Inverter	VSON-5	30	Log6	6a	Ren
L5	-	R1121N251A	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
L5	-	RN5RG45AA	LVR-IC	Ext. transistor, 4.5V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
L5	-	RT9168-20CBR	LVR-IC	LDO, 2.0V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
L5	-	TC7SL04F	CMOS-Log	Inverter	SSOP-5	28	Log6	6a	Tos
L5	-	TC7SL04FU	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	Tos
L5	ea	RN5RY351A	DC-DC-IC	VFM step-up, 3.5V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
L50	-	82C50-AF5-B	Vdet-IC	5.0V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L50	-	ADP1713AUJZ-1.05R	LVR-IC	LDO, 1.05V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Ad
L50	-	MC33761SNT1-50	LVR-IC	LDO, ULN, +CE, 5V±1.5%, 80mA	SOT-23-5	28cx	VR4	6b	Ons
L50	-	R1224N502L	DC-DC-IC	PWM/VFM step-down, 5V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
L50	-	TK71650SCL	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L50	eb	TC125501ECT	DC-DC-IC	PFM step-up, 5.0V±2.5%, 80mA, 100kHz, +CE	SOT-23-5	28c1	DC3	6g	Mcc
L50	eh	XC6382C501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L50	er	XC6385C501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L50G	-	82C50G-AF5-B	Vdet-IC	5.0V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L50L	-	82C50L-AF5-B	Vdet-IC	5.0V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L51	-	82C51-AF5-B	Vdet-IC	5.1V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L51	-	ADP1713AUJZ-1.1-R	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Ad
L51	-	TK71651SCL	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L51	eh	XC6382C511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L51	er	XC6385C511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L510	ek	XC6366B105MR	DC-DC-IC	PWM/PFM st-down, 500kHz, Adj. 1.5..6V±2.5%, 1A, +CE	SOT-25	28zn	DC18	6g	Tor
L51G	-	82C51G-AF5-B	Vdet-IC	5.1V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L51L	-	82C51L-AF5-B	Vdet-IC	5.1V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L52	-	82C52-AF5-B	Vdet-IC	5.2V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L52	-	ADP1713AUJZ-1.15R	LVR-IC	LDO, 1.15V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Ad
L52	-	TK71652SCL	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L52	eh	XC6382C521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L52	er	XC6385C521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L52G	-	82C52G-AF5-B	Vdet-IC	5.2V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L52L	-	82C52L-AF5-B	Vdet-IC	5.2V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L53	-	82C53-AF5-B	Vdet-IC	5.3V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L53	-	ADP1713AUJZ-1.2-R	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Ad
L53	-	TK71653SCL	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L53	eh	XC6382C531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L53	er	XC6385C531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L53G	-	82C53G-AF5-B	Vdet-IC	5.3V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L53L	-	82C53L-AF5-B	Vdet-IC	5.3V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L54	-	82C54-AF5-B	Vdet-IC	5.4V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L54	-	ADP1713AUJZ-1.3-R	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Ad
L54	-	TK71654SCL	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, -30..+80°C	SOT-23-5	28vrx	VR7	6k	Tok
L54	eh	XC6382C541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L54	er	XC6385C541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L54G	-	82C54G-AF5-B	Vdet-IC	5.4V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L54L	-	82C54L-AF5-B	Vdet-IC	5.4V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L55	-	82C55-AF5-B	Vdet-IC	5.5V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L55	-	ADP1713AUJZ-1.5-R	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Ad
L55	-	R1224N552L	DC-DC-IC	PWM/VFM step-down, 5.5V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
L55	eh	XC6382C551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L55	er	XC6385C551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L55G	-	82C55G-AF5-B	Vdet-IC	5.5V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L55L	-	82C55L-AF5-B	Vdet-IC	5.5V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L56	-	82C56-AF5-B	Vdet-IC	5.6V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L56	-	ADP1713AUJZ-1.8-R	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Ad
L56	eh	XC6382C561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L56	er	XC6385C561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L56G	-	82C56G-AF5-B	Vdet-IC	5.6V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L56L	-	82C56L-AF5-B	Vdet-IC	5.6V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L57	-	82C57-AF5-B	Vdet-IC	5.7V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L57	-	ADP1713AUJZ-2.5-R	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Ad
L57	eh	XC6382C571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L57	er	XC6385C571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L57G	-	82C57G-AF5-B	Vdet-IC	5.7V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L57L	-	82C57L-AF5-B	Vdet-IC	5.7V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L58	-	82C58-AF5-B	Vdet-IC	5.8V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L58	-	ADP1713AUJZ-3.0-R	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Ad
L58	eh	XC6382C581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L58	er	XC6385C581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L58A	-	LP2982AIM5-2.5	LVR-IC	Ultra-LDO, +CE, 2.5V±1%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L58B	-	LP2982IM5-2.5	LVR-IC	Ultra-LDO, +CE, 2.5V±1.5%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L58G	-	82C58G-AF5-B	Vdet-IC	5.8V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L58L	-	82C58L-AF5-B	Vdet-IC	5.8V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L59	-	82C59-AF5-B	Vdet-IC	5.9V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L59	-	ADP1713AUJZ-3.3-R	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	TSOT-23-5	28vrx	VR7	6a	Ad
L59	eh	XC6382C591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L59	er	XC6385C591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L59G	-	82C59G-AF5-B	Vdet-IC	5.9V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L59L	-	82C59L-AF5-B	Vdet-IC	5.9V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L5A	-	ADP1714AUJZ-0.75R	LVR-IC	LDO, 0.75V±2%, 300mA, +CE, Track	TSOT-23-5	28e8	VR5a	6a	Ad
L5A	-	XC6108N15AMR	Vdet-IC	1.5V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L5B	-	LP5951MF-2.5	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6a	Nsc
L5B	-	XC6108N15BMR	Vdet-IC	1.5V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L5C	-	ADP1714AUJZ-0.8-R	LVR-IC	LDO, 0.8V±2%, 300mA, +CE, Track	TSOT-23-5	28e8	VR5a	6a	Ad
L5C	-	XC6108N15CMR	Vdet-IC	1.5V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L5D	-	ADP1714AUJZ-0.85R	LVR-IC	LDO, 0.85V±2%, 300mA, +CE, Track	TSOT-23-5	28e8	VR5a	6a	Ad



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L5D	-	XC6108N15DMR	Vdet-IC	1.5V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L5E	-	ADP1714AUJZ-0.9-R	LVR-IC	LDO, 0.9V±2%, 300mA, +CE, Track	TSOT-23-5	28e8	VR5a	6a	Ad
L5F	-	ADP1714AUJZ-0.95R	LVR-IC	LDO, 0.95V±2%, 300mA, +CE, Track	TSOT-23-5	28e8	VR5a	6a	Ad
L5G	-	ADP1714AUJZ-1.0-R	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Track	TSOT-23-5	28e8	VR5a	6a	Ad
L5H	-	ADP1714AUJZ-1.05R	LVR-IC	LDO, 1.05V±2%, 300mA, +CE, Track	TSOT-23-5	28e8	VR5a	6a	Ad
L5J	-	ADP1714AUJZ-1.1-R	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, Track	TSOT-23-5	28e8	VR5a	6a	Ad
L5K	-	ADP1714AUJZ-1.15R	LVR-IC	LDO, 1.15V±2%, 300mA, +CE, Track	TSOT-23-5	28e8	VR5a	6a	Ad
L5L	-	ADP1714AUJZ-1.2-R	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Track	TSOT-23-5	28e8	VR5a	6a	Ad
L5M	-	ADP1714AUJZ-1.3-R	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, Track	TSOT-23-5	28e8	VR5a	6a	Ad
L5N	-	ADP1714AUJZ-1.5-R	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Track	TSOT-23-5	28e8	VR5a	6a	Ad
L5P	-	ADP1714AUJZ-1.8-R	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Track	TSOT-23-5	28e8	VR5a	6a	Ad
L5Q	-	ADP1714AUJZ-2.5-R	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Track	TSOT-23-5	28e8	VR5a	6a	Ad
L5R	-	ADP1714AUJZ-3.0-R	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Track	TSOT-23-5	28e8	VR5a	6a	Ad
L5S	-	ADP1714AUJZ-3.3-R	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Track	TSOT-23-5	28e8	VR5a	6a	Ad
L6	-	HD74LV1GU04ACM	CMOS-Log	Inverter	CMPAK-5	28	Log6	6a	Ren
L6	-	HD74LV1GU04AVS	CMOS-Log	Inverter	VSON-5	30	Log6	6a	Ren
L6	-	KTC601E-GR	Si-npn	Dual GP, 50V, 150mA, 100mW, B=200..400, 80MHz	TESV	30/T11	T11	6l	Kec
L6	-	KTC601U-GR	Si-npn	Dual GP, 50V, 150mA, 100mW, B=200..400, 80MHz	USV	28	T11	6l	Kec
L6	-	NL17SZ04DF	CMOS-Log	Inverter	SOT-353	28	Log6	6b	Ons
L6	-	R1121N261A	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
L6	-	RN5RG46AA	LVR-IC	Ext. transistor, 4.6V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
L6	-	RT9168-21CBR	LVR-IC	LDO, 2.1V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
L6	-	TC7SLU04F	CMOS-Log	Inverter	SSOP-5	28	Log6	6a	Tos
L6	-	TC7SLU04FU	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	Tos
L6	ea	RN5RY361A	DC-DC-IC	VFM step-up, 3.6V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
L60	-	82C60-AF5-B	Vdet-IC	6.0V±2% -Reset PPO	SOT-23-5	28vdm	VD7	6a	Utc
L60	-	R1224N602L	DC-DC-IC	PWM/VFM step-down, 6V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
L60	eh	XC6382C601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L60	er	XC6385C601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L60A	-	LP2982AIM5-2.8	LVR-IC	Ultra-LDO, +CE, 2.8V±1%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L60B	-	LP2982IM5-2.8	LVR-IC	Ultra-LDO, +CE, 2.8V±1.5%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L60G	-	82C60G-AF5-B	Vdet-IC	6.0V±2% -Reset PPO, halogen free	SOT-23-5	28vdm	VD7	6a	Utc
L60L	-	82C60L-AF5-B	Vdet-IC	6.0V±2% -Reset PPO, lead free	SOT-23-5	28vdm	VD7	6a	Utc
L61	eh	XC6382C611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L61	er	XC6385C611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L62	eh	XC6382C621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L62	er	XC6385C621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L63	-	TC53N1602ECT	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
L63	eh	XC6382C631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L63	er	XC6385C631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L64	eh	XC6382C641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L64	er	XC6385C641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L65	eh	XC6382C651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L65	er	XC6385C651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L66	eh	XC6382C661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L66	er	XC6385C661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L67	eh	XC6382C671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L67	er	XC6385C671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L68	eh	XC6382C681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L68	er	XC6385C681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L69	eh	XC6382C691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L69	er	XC6385C691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L6A	-	S-1112B15MC-L6ATFG	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6A	-	S-1112B15PN-L6ATFG	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6A	-	XC6108N16AMR	Vdet-IC	1.6V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L6B	-	LP5951MF-2.8	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6a	Nsc
L6B	-	S-1112B16MC-L6BTFG	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6B	-	S-1112B16PN-L6BTFG	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6B	-	XC6108N16BMR	Vdet-IC	1.6V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L6C	-	S-1112B17MC-L6CTFG	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6C	-	S-1112B17PN-L6CTFG	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6C	-	XC6108N16CMR	Vdet-IC	1.6V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L6D	-	S-1112B18MC-L6DTFG	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6D	-	S-1112B18PN-L6DTFG	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6D	-	XC6108N16DMR	Vdet-IC	1.6V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L6E	-	S-1112B19MC-L6ETFG	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6E	-	S-1112B19PN-L6ETFG	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6F	-	S-1112B20MC-L6FTFG	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6F	-	S-1112B20PN-L6FTFG	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6G	-	S-1112B21MC-L6GTFG	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L6G	-	S-1112B21PN-L6GTFG	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6H	-	S-1112B22MC-L6HTFG	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6H	-	S-1112B22PN-L6HTFG	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6I	-	S-1112B23MC-L6ITFG	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6I	-	S-1112B23PN-L6ITFG	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6J	-	S-1112B24MC-L6JTFG	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6J	-	S-1112B24PN-L6JTFG	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6K	-	S-1112B25MC-L6KTFG	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6K	-	S-1112B25PN-L6KTFG	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6L	-	S-1112B26MC-L6LTFG	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6L	-	S-1112B26PN-L6LTFG	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6M	-	S-1112B27MC-L6MTFG	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6M	-	S-1112B27PN-L6MTFG	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6N	-	S-1112B28MC-L6NTFG	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6N	-	S-1112B28PN-L6NTFG	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6O	-	S-1112B29MC-L6OTFG	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6O	-	S-1112B29PN-L6OTFG	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6P	-	S-1112B30MC-L6PTFG	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6P	-	S-1112B30PN-L6PTFG	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6Q	-	S-1112B31MC-L6QTFG	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6Q	-	S-1112B31PN-L6QTFG	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6R	-	S-1112B32MC-L6RTFG	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6R	-	S-1112B32PN-L6RTFG	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6S	-	S-1112B33MC-L6STFG	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6S	-	S-1112B33PN-L6STFG	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6T	-	S-1112B34MC-L6TTFG	LVR-IC	LDO, 3.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6T	-	S-1112B34PN-L6TTFG	LVR-IC	LDO, 3.4V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6U	-	S-1112B35MC-L6UTFG	LVR-IC	LDO, 3.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6U	-	S-1112B35PN-L6UTFG	LVR-IC	LDO, 3.5V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6V	-	S-1112B36MC-L6VTFG	LVR-IC	LDO, 3.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6V	-	S-1112B36PN-L6VTFG	LVR-IC	LDO, 3.6V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6W	-	S-1112B37MC-L6WTFG	LVR-IC	LDO, 3.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6W	-	S-1112B37PN-L6WTFG	LVR-IC	LDO, 3.7V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6X	-	S-1112B38MC-L6XTFG	LVR-IC	LDO, 3.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6X	-	S-1112B38PN-L6XTFG	LVR-IC	LDO, 3.8V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6Y	-	S-1112B39MC-L6YTFG	LVR-IC	LDO, 3.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6Y	-	S-1112B39PN-L6YTFG	LVR-IC	LDO, 3.9V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L6Z	-	S-1112B40MC-L6ZTFG	LVR-IC	LDO, 4.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L6Z	-	S-1112B40PN-L6ZTFG	LVR-IC	LDO, 4.0V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L7	-	R1121N271A	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
L7	-	RN5RG47AA	LVR-IC	Ext. transistor, 4.7V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
L7	-	RT9168-22CBR	LVR-IC	LDO, 2.2V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
L7	ea	RN5RY371A	DC-DC-IC	VFM step-up, 3.7V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
L70	eh	XC6382C701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L70	er	XC6385C701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
L73	-	TC53N1702ECT	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
L76A	-	LP2982AIM5-3.8	LVR-IC	Ultra-LDO, +CE, 3.8V±1%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L76B	-	LP2982IM5-3.8	LVR-IC	Ultra-LDO, +CE, 3.8V±1.5%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
L77A	-	LP2981AIM5-2.8	LVR-IC	Ultra-LDO, +CE, 2.8V±0.5%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L77B	-	LP2981IM5-2.8	LVR-IC	Ultra-LDO, +CE, 2.8V±2%, 100mA	SOT-23-5	28cx	VR4	6g	Nsc
L78B	-	LM3490IM5-3.3	LVR-IC	Quasi-LDO, 3.3V±5%, 100mA, +CE	SOT-23-5	28um	VR4	6g	Nsc
L79B	-	LM3490IM5-5.0	LVR-IC	Quasi-LDO, 5.0V±5%, 100mA, +CE	SOT-23-5	28um	VR4	6g	Nsc
L7A	-	S-1112B41MC-L7ATFG	LVR-IC	LDO, 4.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L7A	-	S-1112B41PN-L7ATFG	LVR-IC	LDO, 4.1V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L7A	-	XC6108N17AMR	Vdet-IC	1.7V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L7B	-	LP5951MF-3.0	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6a	Nsc
L7B	-	S-1112B42MC-L7BTFG	LVR-IC	LDO, 4.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L7B	-	S-1112B42PN-L7BTFG	LVR-IC	LDO, 4.2V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L7B	-	XC6108N17BMR	Vdet-IC	1.7V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L7C	-	S-1112B43MC-L7CTFG	LVR-IC	LDO, 4.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L7C	-	S-1112B43PN-L7CTFG	LVR-IC	LDO, 4.3V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L7C	-	XC6108N17CMR	Vdet-IC	1.7V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L7D	-	S-1112B44MC-L7DTFG	LVR-IC	LDO, 4.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L7D	-	S-1112B44PN-L7DTFG	LVR-IC	LDO, 4.4V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L7D	-	XC6108N17DMR	Vdet-IC	1.7V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L7E	-	S-1112B45MC-L7ETFG	LVR-IC	LDO, 4.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L7E	-	S-1112B45PN-L7ETFG	LVR-IC	LDO, 4.5V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L7F	-	S-1112B46MC-L7FTFG	LVR-IC	LDO, 4.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L7F	-	S-1112B46PN-L7FTFG	LVR-IC	LDO, 4.6V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L7G	-	S-1112B47MC-L7GTFG	LVR-IC	LDO, 4.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L7G	-	S-1112B47PN-L7GTFG	LVR-IC	LDO, 4.7V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L7H	-	S-1112B48MC-L7HTFG	LVR-IC	LDO, 4.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L7H	-	S-1112B48PN-L7HTFG	LVR-IC	LDO, 4.8V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L7I	-	S-1112B49MC-L7ITFG	LVR-IC	LDO, 4.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L7I	-	S-1112B49PN-L7ITFG	LVR-IC	LDO, 4.9V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L7J	-	S-1112B50MC-L7JTFG	LVR-IC	LDO, 5.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L7J	-	S-1112B50PN-L7JTFG	LVR-IC	LDO, 5.0V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L7K	-	S-1112B51MC-L7KTFG	LVR-IC	LDO, 5.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L7K	-	S-1112B51PN-L7KTFG	LVR-IC	LDO, 5.1V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L7L	-	S-1112B52MC-L7LTFG	LVR-IC	LDO, 5.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L7L	-	S-1112B52PN-L7LTFG	LVR-IC	LDO, 5.2V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L7M	-	S-1112B53MC-L7MTFG	LVR-IC	LDO, 5.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L7M	-	S-1112B53PN-L7MTFG	LVR-IC	LDO, 5.3V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L7N	-	S-1112B54MC-L7NTFG	LVR-IC	LDO, 5.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L7N	-	S-1112B54PN-L7NTFG	LVR-IC	LDO, 5.4V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L7O	-	S-1112B55MC-L7OTFG	LVR-IC	LDO, 5.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L7O	-	S-1112B55PN-L7OTFG	LVR-IC	LDO, 5.5V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L7P	-	S-1112B2JMC-L7PTFG	LVR-IC	LDO, 2.85V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
L7P	-	S-1112B2JPN-L7PTFG	LVR-IC	LDO, 2.85V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
L8	-	HD74LV1G86ACM	CMOS-Log	2-input EXCLUSIVE-OR gate	CMPAK-5	28	Log5	6a	Ren
L8	-	HD74LV1G86AVS	CMOS-Log	2-input EXCLUSIVE-OR gate	VSON-5	30	Log5	6a	Ren
L8	-	R1121N281A	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
L8	-	RN5RG48AA	LVR-IC	Ext. transistor, 4.8V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
L8	-	RT9168-23CBR	LVR-IC	LDO, 2.3V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
L8	ea	RN5RY381A	DC-DC-IC	VFM step-up, 3.8V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
L80B	-	LM3490IM5-12	LVR-IC	Quasi-LDO, 12V±5%, 100mA, +CE	SOT-23-5	28um	VR4	6g	Nsc
L81B	-	LM3490IM5-15	LVR-IC	Quasi-LDO, 15V±5%, 100mA, +CE	SOT-23-5	28um	VR4	6g	Nsc
L83	-	TC53N1802ECT	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
L8A	-	S-1122B15MC-L9ATFG	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8A	-	S-1122B15PN-L9ATFG	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8A	-	XC6108N18AMR	Vdet-IC	1.8V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L8A	-	XC6118C08AMR-G	Vdet-IC	0.8V±30mV, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
L8B	-	S-1122B16MC-L8BTFG	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8B	-	S-1122B16PN-L8BTFG	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8B	-	XC6108N18BMR	Vdet-IC	1.8V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L8B	-	XC6118C08BMR-G	Vdet-IC	0.8V±30mV, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
L8C	-	S-1122B17MC-L8CTFG	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8C	-	S-1122B17PN-L8CTFG	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8C	-	XC6108N18CMR	Vdet-IC	1.8V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L8C	-	XC6118C08CMR-G	Vdet-IC	0.8V±30mV, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
L8D	-	S-1122B18MC-L8DTFG	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8D	-	S-1122B18PN-L8DTFG	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8D	-	XC6108N18DMR	Vdet-IC	1.8V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L8D	-	XC6118C08DMR-G	Vdet-IC	0.8V±30mV, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
L8E	-	ADP170AUJZ-1.2-R7	LVR-IC	LDO, 1.2V±1%, 300mA, +CE	UJ-5	28cx	VR4	6a	Ad
L8E	-	S-1122B19MC-L8ETFG	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8E	-	S-1122B19PN-L8ETFG	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8F	-	ADP170AUJZ-1.5-R7	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	UJ-5	28cx	VR4	6a	Ad
L8F	-	S-1122B20MC-L8FTFG	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8F	-	S-1122B20PN-L8FTFG	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8G	-	ADP170AUJZ-1.8-R7	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	UJ-5	28cx	VR4	6a	Ad
L8G	-	S-1122B21MC-L8GTFG	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8G	-	S-1122B21PN-L8GTFG	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8H	-	ADP170AUJZ-2.5-R7	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	UJ-5	28cx	VR4	6a	Ad
L8H	-	S-1122B22MC-L8HTFG	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8H	-	S-1122B22PN-L8HTFG	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8I	-	S-1122B23MC-L8ITFG	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8I	-	S-1122B23PN-L8ITFG	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8J	-	S-1122B24MC-L8JTFG	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8J	-	S-1122B24PN-L8JTFG	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8K	-	S-1122B25MC-L8KTFG	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8K	-	S-1122B25PN-L8KTFG	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8L	-	S-1122B26MC-L8LTFG	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8L	-	S-1122B26PN-L8LTFG	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8M	-	S-1122B27MC-L8MTFG	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8M	-	S-1122B27PN-L8MTFG	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8N	-	S-1122B28MC-L8NTFG	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8N	-	S-1122B28PN-L8NTFG	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8O	-	S-1122B29MC-L8OTFG	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8O	-	S-1122B29PN-L8OTFG	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L8P	-	ADP170AUJZ-2.8-R7	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	UJ-5	28cx	VR4	6a	Ad
L8P	-	S-1122B30MC-L8PTFG	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8P	-	S-1122B30PN-L8PTFG	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8Q	-	S-1122B31MC-L8QTFG	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8Q	-	S-1122B31PN-L8QTFG	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8R	-	S-1122B32MC-L8RTFG	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8R	-	S-1122B32PN-L8RTFG	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8S	-	S-1122B33MC-L8STFG	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8S	-	S-1122B33PN-L8STFG	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8T	-	S-1122B34MC-L8TTFG	LVR-IC	LDO, 3.4V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8T	-	S-1122B34PN-L8TTFG	LVR-IC	LDO, 3.4V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8U	-	S-1122B35MC-L8UTFG	LVR-IC	LDO, 3.5V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8U	-	S-1122B35PN-L8UTFG	LVR-IC	LDO, 3.5V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8V	-	S-1122B36MC-L8VTFG	LVR-IC	LDO, 3.6V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8V	-	S-1122B36PN-L8VTFG	LVR-IC	LDO, 3.6V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8W	-	S-1122B37MC-L8WTFG	LVR-IC	LDO, 3.7V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8W	-	S-1122B37PN-L8WTFG	LVR-IC	LDO, 3.7V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8X	-	S-1122B38MC-L8XTFG	LVR-IC	LDO, 3.8V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8X	-	S-1122B38PN-L8XTFG	LVR-IC	LDO, 3.8V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8Y	-	S-1122B39MC-L8YTFG	LVR-IC	LDO, 3.9V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8Y	-	S-1122B39PN-L8YTFG	LVR-IC	LDO, 3.9V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L8Z	-	S-1122B40MC-L8ZTFG	LVR-IC	LDO, 4.0V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L8Z	-	S-1122B40PN-L8ZTFG	LVR-IC	LDO, 4.0V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L9	-	HD74LV1G66ACM	CMOS-Log	Single-pole single-throw analog switch	CMPAK-5	28	Log16	6a	Ren
L9	-	HD74LV1G66AVS	CMOS-Log	Single-pole single-throw analog switch	VSON-5	30	Log16	6a	Ren
L9	-	R1121N291A	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
L9	-	RN5RG49AA	LVR-IC	Ext. transistor, 4.9V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
L9	-	RT9168-24CBR	LVR-IC	LDO, 2.4V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
L9	ea	RN5RY391A	DC-DC-IC	VFM step-up, 3.9V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
L93	-	TC53N1902ECT	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
L9A	-	ADP171AUJZ-R7	LVR-IC	LDO, Adjustable 0.8..3.0V±1%, 300mA, +CE	UJ-5	28sg	VR5	6a	Ad
L9A	-	S-1122B41MC-L9ATFG	LVR-IC	LDO, 4.1V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L9A	-	S-1122B41PN-L9ATFG	LVR-IC	LDO, 4.1V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L9A	-	XC6108N19AMR	Vdet-IC	1.9V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L9A	-	XC6118C09AMR-G	Vdet-IC	0.9V±30mV, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
L9B	-	S-1122B42MC-L9BTFG	LVR-IC	LDO, 4.2V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L9B	-	S-1122B42PN-L9BTFG	LVR-IC	LDO, 4.2V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L9B	-	XC6108N19BMR	Vdet-IC	1.9V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
L9B	-	XC6118C09BMR-G	Vdet-IC	0.9V±30mV, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
L9C	-	S-1122B43MC-L9CTFG	LVR-IC	LDO, 4.3V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L9C	-	S-1122B43PN-L9CTFG	LVR-IC	LDO, 4.3V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L9C	-	XC6108N19CMR	Vdet-IC	1.9V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L9C	-	XC6118C09CMR-G	Vdet-IC	0.9V±30mV, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
L9D	-	S-1122B44MC-L9DTFG	LVR-IC	LDO, 4.4V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L9D	-	S-1122B44PN-L9DTFG	LVR-IC	LDO, 4.4V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L9D	-	XC6108N19DMR	Vdet-IC	1.9V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
L9D	-	XC6118C09DMR-G	Vdet-IC	0.9V±30mV, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
L9E	-	S-1122B45MC-L9ETFG	LVR-IC	LDO, 4.5V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L9E	-	S-1122B45PN-L9ETFG	LVR-IC	LDO, 4.5V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L9F	-	S-1122B46MC-L9FTFG	LVR-IC	LDO, 4.6V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L9F	-	S-1122B46PN-L9FTFG	LVR-IC	LDO, 4.6V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L9G	-	S-1122B47MC-L9GTFG	LVR-IC	LDO, 4.7V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L9G	-	S-1122B47PN-L9GTFG	LVR-IC	LDO, 4.7V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L9H	-	S-1122B48MC-L9HTFG	LVR-IC	LDO, 4.8V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L9H	-	S-1122B48PN-L9HTFG	LVR-IC	LDO, 4.8V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L9I	-	S-1122B49MC-L9ITFG	LVR-IC	LDO, 4.9V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L9I	-	S-1122B49PN-L9ITFG	LVR-IC	LDO, 4.9V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L9J	-	S-1122B50MC-L9JTFG	LVR-IC	LDO, 5.0V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L9J	-	S-1122B50PN-L9JTFG	LVR-IC	LDO, 5.0V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L9K	-	S-1122B51MC-L9KTFG	LVR-IC	LDO, 5.1V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L9K	-	S-1122B51PN-L9KTFG	LVR-IC	LDO, 5.1V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L9L	-	S-1122B52MC-L9LTFG	LVR-IC	LDO, 5.2V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L9L	-	S-1122B52PN-L9LTFG	LVR-IC	LDO, 5.2V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L9M	-	S-1122B53MC-L9MTFG	LVR-IC	LDO, 5.3V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L9M	-	S-1122B53PN-L9MTFG	LVR-IC	LDO, 5.3V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L9N	-	S-1122B54MC-L9NTFG	LVR-IC	LDO, 5.4V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L9N	-	S-1122B54PN-L9NTFG	LVR-IC	LDO, 5.4V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
L9O	-	S-1122B55MC-L9OTFG	LVR-IC	LDO, 5.5V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
L9O	-	S-1122B55PN-L9OTFG	LVR-IC	LDO, 5.5V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
La	-	AX6603-330B	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LA	-	AX6603-120B	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LA	-	BU4941FWE	Vdet-IC	4.1V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
LA	-	BU4941G	Vdet-IC	4.1V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
LA	-	HD74LV1G14ACM	CMOS-Log	Inverting Schmitt-trigger	CMPAK-5	28	Log7	6a	Ren
LA	-	HD74LV1G14AVS	CMOS-Log	Inverting Schmitt-trigger	VSON-5	30	Log7	6a	Ren
LA	-	IDT74LVC1G00ADY	CMOS-Log	2-input NAND gate	SO5-1	28	Log1	6g	Idt
LA	-	NL17SZ14DF	CMOS-Log	Inverting Schmitt-trigger	SC-70-5	28	Log7	6b	Ons
LA	-	RT9168-25CBR	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
LA	-	TC6504N015VCT	Tdet-IC	-15°C±0.5°C, +Tunder ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
LA0	-	XC6219A312MR	LVR-IC	LDO, 3.1V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LA1	-	XC6219A322MR	LVR-IC	LDO, 3.2V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LA2	-	XC6219A332MR	LVR-IC	LDO, 3.3V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LA3	-	XC6219A342MR	LVR-IC	LDO, 3.4V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LA4	-	XC6219A352MR	LVR-IC	LDO, 3.5V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LA5	-	XC6219A362MR	LVR-IC	LDO, 3.6V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LA6	-	XC6219A372MR	LVR-IC	LDO, 3.7V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LA7	-	XC6219A382MR	LVR-IC	LDO, 3.8V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LA7A	-	LP2985AIM5-4.5	LVR-IC	Ultra-LDO, 4.5V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LA7B	-	LP2985IM5-4.5	LVR-IC	Ultra-LDO, 4.5V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LA8	-	XC6219A392MR	LVR-IC	LDO, 3.9V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LA8	-	XC9236C08CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LA8A	-	LP2982AIM5-4.5	LVR-IC	Ultra-LDO, +CE, 4.5V±1%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
LA8B	-	LP2982AIM5-4.5	LVR-IC	Ultra-LDO, +CE, 4.5V±1%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
LA9	-	XC6219A402MR	LVR-IC	LDO, 4.0V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LA9	-	XC9236C09CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LAA	-	RP171N571B	LVR-IC	LDO, 5.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
LAA	-	XC6219A412MR	LVR-IC	LDO, 4.1V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LAB	-	LP5951MF-3.3	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SC-70-5	28cx	VR4	6a	Nsc
LAB	-	MIC5213-5.0BC5	LVR-IC	LDO, 5.0V±3%, 150mA, +CE	SC-70-5	28xm	VR4	6g	Mcr
LAB	-	RP171N581B	LVR-IC	LDO, 5.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
LAB	-	XC6219A422MR	LVR-IC	LDO, 4.2V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LAB	fc	MIC5213-5.0YC5	LVR-IC	LDO, 5.0V±3%, 150mA, +CE, Pb-free	SC-70-5	28xm	VR4	6g	Mcr
LAC	-	RP171N591B	LVR-IC	LDO, 5.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
LAC	-	XC6219A432MR	LVR-IC	LDO, 4.3V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LAD	-	MIC5213-3.6BC5	LVR-IC	LDO, 3.6V±3%, 150mA, +CE	SC-70-5	28xm	VR4	6g	Mcr
LAD	-	RP171N601B	LVR-IC	LDO, 6.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
LAD	-	XC6219A442MR	LVR-IC	LDO, 4.4V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LAD	fc	MIC5213-3.6YC5	LVR-IC	LDO, 3.6V±3%, 150mA, +CE, Pb-free	SC-70-5	28xm	VR4	6g	Mcr
LAE	-	MIC5213-3.3BC5	LVR-IC	LDO, 3.3V±3%, 150mA, +CE	SC-70-5	28xm	VR4	6g	Mcr
LAE	-	XC6219A452MR	LVR-IC	LDO, 4.5V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LAE	fc	MIC5213-3.3YC5	LVR-IC	LDO, 3.3V±3%, 150mA, +CE, Pb-free	SC-70-5	28xm	VR4	6g	Mcr
LAF	-	XC6219A462MR	LVR-IC	LDO, 4.6V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LAG	-	MIC5213-3.0BC5	LVR-IC	LDO, 3.0V±3%, 150mA, +CE	SC-70-5	28xm	VR4	6g	Mcr
LAG	fc	MIC5213-3.0YC5	LVR-IC	LDO, 3.0V±3%, 150mA, +CE, Pb-free	SC-70-5	28xm	VR4	6g	Mcr
LAGA	-	LP2980AIM5-1.8	LVR-IC	Ultra-LDO, 1.8V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
LAGB	-	LP2980IM5-1.8	LVR-IC	Ultra-LDO, 1.8V±2%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
LAH	-	XC6219A472MR	LVR-IC	LDO, 4.7V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LAIA	-	LP2985AIM5-3.5	LVR-IC	Ultra-LDO, 3.4V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LAJ	-	MIC5213-2.8BC5	LVR-IC	LDO, 2.8V±3%, 150mA, +CE	SC-70-5	28xm	VR4	6g	Mcr
LAJ	fc	MIC5213-2.8YC5	LVR-IC	LDO, 2.8V±3%, 150mA, +CE, Pb-free	SC-70-5	28xm	VR4	6g	Mcr
LAJA	-	LP2985AIM5-4.7	LVR-IC	Ultra-LDO, 4.7V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LAJB	-	LP2985IM5-4.7	LVR-IC	Ultra-LDO, 4.7V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LAK	-	XC6219A482MR	LVR-IC	LDO, 4.8V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LAKA	-	LP2985AIM5-4.8	LVR-IC	Ultra-LDO, 4.8V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LAKB	-	LP2985IM5-4.8	LVR-IC	Ultra-LDO, 4.8V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LAL	-	MIC5213-2.7BC5	LVR-IC	LDO, 2.7V±3%, 150mA, +CE	SC-70-5	28xm	VR4	6g	Mcr
LAL	-	XC6219A492MR	LVR-IC	LDO, 4.9V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LAL	-	XC9236C0LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LAL	fc	MIC5213-2.7YC5	LVR-IC	LDO, 2.7V±3%, 150mA, +CE, Pb-free	SC-70-5	28xm	VR4	6g	Mcr
LALA	-	LP2985AIM5-2.7	LVR-IC	Ultra-LDO, 2.7V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LALB	-	LP2985IM5-2.7	LVR-IC	Ultra-LDO, 2.7V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LAM	-	MIC5213-2.5BC5	LVR-IC	LDO, 2.5V±3%, 150mA, +CE	SC-70-5	28xm	VR4	6g	Mcr
LAM	-	XC6219A502MR	LVR-IC	LDO, 5.0V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LAM	-	XC9236C0MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LAM	fc	MIC5213-2.5YC5	LVR-IC	LDO, 2.5V±3%, 150mA, +CE, Pb-free	SC-70-5	28xm	VR4	6g	Mcr
LANA	-	LP2980AIM5-1.5	LVR-IC	Ultra-LDO, 1.5V±0.5%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
LANB	-	LP2980IM5-1.5	LVR-IC	Ultra-LDO, 1.5V±2%, 50mA,+CE	SOT-23-5	28cx	VR4	6g	Nsc
LAO	-	NCP551SN15T1	LVR-IC	LDO, Low Iq, +CE, 1.5V±2%, 150mA	SOT-353	30cx	VR4	6b	Ons
LAP	-	NCP551SN18T1	LVR-IC	LDO, Low Iq, +CE, 1.8V±2%, 150mA	SOT-353	30cx	VR4	6b	Ons
LAQ	-	MIC5213-2.6BC5	LVR-IC	LDO, 2.6V±3%, 150mA, +CE	SC-70-5	28xm	VR4	6g	Mcr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LAQ	-	NCP551SN25T1	LVR-IC	LDO, Low Iq, +CE, 2.5V±2%, 150mA	SOT-353	30cx	VR4	6b	Ons
LAQ	fc	MIC5213-2.6YC5	LVR-IC	LDO, 2.6V±3%, 150mA, +CE, Pb-free	SC-70-5	28xm	VR4	6g	Mcr
LAR	-	NCP551SN27T1	LVR-IC	LDO, Low Iq, +CE, 2.7V±2%, 150mA	SOT-353	30cx	VR4	6b	Ons
LAS	-	NCP551SN28T1	LVR-IC	LDO, Low Iq, +CE, 2.8V±2%, 150mA	SOT-353	30cx	VR4	6b	Ons
LAT	-	NCP551SN30T1	LVR-IC	LDO, Low Iq, +CE, 3V±2%, 150mA	SOT-353	30cx	VR4	6b	Ons
LAU	-	NCP551SN33T1	LVR-IC	LDO, Low Iq, +CE, 3.3V±2%, 150mA	SOT-353	30cx	VR4	6b	Ons
LAUA	-	LP2985AIM5-2.5	LVR-IC	Ultra-LDO, 2.5V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LAUB	-	LP2985IM5-2.5	LVR-IC	Ultra-LDO, 2.5V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LAV	-	NCP551SN50T1	LVR-IC	LDO, Low Iq, +CE, 5V±2%, 150mA	SOT-353	30cx	VR4	6b	Ons
LAXA	-	LP2985AIM5-2.9	LVR-IC	Ultra-LDO, 2.9V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LAXB	-	LP2985IM5-2.9	LVR-IC	Ultra-LDO, 2.9V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LAYA	-	LP2985AIM5-1.8	LVR-IC	Ultra-LDO, 1.8V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LAYB	-	LP2985IM5-1.8	LVR-IC	Ultra-LDO, 1.8V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LAZB	-	LP3961EMP-3.3	LVR-IC	Ultra-LDO, +CE, 3.3V±1.5%, 800mA, -Error	SOT-223-5	27vrz	VR17	6x	Nsc
Lb	-	AX6603-340B	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LB	-	AX6603-130B	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LB	-	BU4942FWE	Vdet-IC	4.2V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
LB	-	BU4942G	Vdet-IC	4.2V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
LB	-	HD74LV1G125ACM	CMOS-Log	Bus buffer gate with 3-state output	CMPAK-5	28	Log14	6a	Ren
LB	-	HD74LV1G125AVS	CMOS-Log	Bus buffer gate with 3-state output	VSON-5	30	Log14	6a	Ren
LB	-	IDT74LVC1G02ADY	CMOS-Log	2-input NOR gate	SO5-1	28	Log2	6g	Idt
LB	-	RT9168-26CBR	LVR-IC	LDO, 2.6V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
LB	-	TC6504P005VCT	Tdet-IC	5°C±0.5°C, +Tunder ODO, Hysteresis	SOT-23-5	28	-	6a	Mcc
LB0	-	XC6219B312MR	LVR-IC	LDO, 3.1V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LB0	-	XC9236C10CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LB1	-	XC6219B322MR	LVR-IC	LDO, 3.2V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LB1	-	XC9236C11CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LB2	-	XC6219B332MR	LVR-IC	LDO, 3.3V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LB2	-	XC9236C12CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LB2	-	XC9254R001MR	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.2V±2%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
LB25	-	MIC5205-2.5BM5	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LB27	-	MIC5205-2.7BM5	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LB28	-	MIC5205-2.8BM5	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LB29	-	MIC5205-2.9BM5	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LB2J	-	MIC5205-2.85BM5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LB3	-	XC6219B342MR	LVR-IC	LDO, 3.4V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LB3	-	XC9236C13CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LB30	-	MIC5205-3.0BM5	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LB31	-	MIC5205-3.1BM5	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LB32	-	MIC5205-3.2BM5	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LB33	-	MIC5205-3.3BM5	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LB36	-	MIC5205-3.6BM5	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LB38	-	MIC5205-3.8BM5	LVR-IC	LDO, 3.8V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LB4	-	XC6219B352MR	LVR-IC	LDO, 3.5V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LB4	-	XC9236C14CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LB40	-	MIC5205-4.0BM5	LVR-IC	LDO, 4.0V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LB5	-	XC6219B362MR	LVR-IC	LDO, 3.6V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LB5	-	XC9236C15CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LB50	-	MIC5205-5.0BM5	LVR-IC	LDO, 5.0V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LB6	-	XC6219B372MR	LVR-IC	LDO, 3.7V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LB6	-	XC9236C16CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LB7	-	XC6219B382MR	LVR-IC	LDO, 3.8V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LB7	-	XC9236C17CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LB8	-	XC6219B392MR	LVR-IC	LDO, 3.9V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LB8	-	XC9236C18CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LB9	-	XC6219B402MR	LVR-IC	LDO, 4.0V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LB9	-	XC9236C19CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LBA	-	RP171N571D	LVR-IC	LDO, 5.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
LBA	-	XC6219B412MR	LVR-IC	LDO, 4.1V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LBA	-	XC9236C1ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LBAA	-	MIC5205BM5	LVR-IC	LDO, Adj. 2.5..10V±1%, 150mA, +CE	SOT-23-5	28vrx	VR16	6g	Mcr
LBAB	-	LP3961EMP-1.8	LVR-IC	Ultra-LDO, +CE, 1.8V±1.5%, 800mA, -Error	SOT-223-5	27vrz	VR17	6x	Nsc
LBB	-	RP171N581D	LVR-IC	LDO, 5.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
LBB	-	XC6219B422MR	LVR-IC	LDO, 4.2V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LBB	-	XC9236C1BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LBBB	-	LP3961EMP-2.5	LVR-IC	Ultra-LDO, +CE, 2.5V±1.5%, 800mA, -Error	SOT-223-5	27vrz	VR17	6x	Nsc
LBC	-	RP171N591D	LVR-IC	LDO, 5.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
LBC	-	XC6219B432MR	LVR-IC	LDO, 4.3V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LBC	-	XC9236C1CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LBCB	-	LP3962EMP-1.8	LVR-IC	Ultra-LDO, -CE, 1.8V±1.5%, 1.5A, -Error	SOT-223-5	27vrz	VR17	6x	Nsc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LBD	-	RP171N601D	LVR-IC	LDO, 6.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
LBD	-	XC6219B442MR	LVR-IC	LDO, 4.4V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LBD	-	XC9236C1DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LBDB	-	LP3962EMP-2.5	LVR-IC	Ultra-LDO, -CE, 2.5V±1.5%, 1.5A, -Error	SOT-223-5	27vrz	VR17	6x	Nsc
LBE	-	XC6219B452MR	LVR-IC	LDO, 4.5V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LBE	-	XC9236C1ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LBEB	-	LP3962EMP-3.3	LVR-IC	Ultra-LDO, -CE, 3.3V±1.5%, 1.5A, -Error	SOT-223-5	27vrz	VR17	6x	Nsc
LBF	-	XC6219B462MR	LVR-IC	LDO, 4.6V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LBF	-	XC9236C1FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LBFB	-	LP3964EMP-1.8	LVR-IC	Ultra-LDO, CE, 1.8V±1.5%, 800mA, Sense	SOT-223-5	27vry	VR18	6x	Nsc
LBH	-	XC6219B472MR	LVR-IC	LDO, 4.7V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LBH	-	XC9236C1HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LBHB	-	LP3964EMP-2.5	LVR-IC	Ultra-LDO, CE, 2.5V±1.5%, 800mA, Sense	SOT-223-5	27vry	VR18	6x	Nsc
LBIB	-	LP2985IM5-3.5	LVR-IC	Ultra-LDO, 3.5V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LBJB	-	LP3964EMP-3.3	LVR-IC	Ultra-LDO, CE, 3.3V±1.5%, 800mA, Sense	SOT-223-5	27vry	VR18	6x	Nsc
LBK	-	XC6219B482MR	LVR-IC	LDO, 4.8V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LBK	-	XC9236C1KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LBKB	-	LP3965EMP-1.8	LVR-IC	Ultra-LDO, CE, 1.8V±1.5%, 1.5A, Sense	SOT-223-5	27vry	VR18	6x	Nsc
LBL	-	XC6219B492MR	LVR-IC	LDO, 4.9V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LBL	-	XC9236C1LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LBLB	-	LP3965EMP-2.5	LVR-IC	Ultra-LDO, CE, 2.5V±1.5%, 1.5A, Sense	SOT-223-5	27vry	VR18	6x	Nsc
LBM	-	XC6219B502MR	LVR-IC	LDO, 5.0V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LBM	-	XC9236C1MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LBNB	-	LP3965EMP-3.3	LVR-IC	Ultra-LDO, CE, 3.3V±1.5%, 1.5A, Sense	SOT-223-5	27vry	VR18	6x	Nsc
LBPB	-	LP3964EMP-ADJ	LVR-IC	Ultra-LDO, +CE, Adjustable 1.8..5V±1.5%, 800mA	SOT-223-5	27	VR5	6x	Nsc
LBRB	-	LP3965EMP-ADJ	LVR-IC	Ultra-LDO, +CE, Adjustable 1.8..5V±1.5%, 1.5A	SOT-223-5	27	VR5	6x	Nsc
LBSB	-	LP3961EMP-5.0	LVR-IC	Ultra-LDO, +CE, 5V±1.5%, 800mA, -Error	SOT-223-5	27vrz	VR17	6x	Nsc
LBTB	-	LP3962EMP-5.0	LVR-IC	Ultra-LDO, -CE, 5V±1.5%, 1.5A, -Error	SOT-223-5	27vrz	VR17	6x	Nsc
LBU	-	NCP511SN15T1	LVR-IC	LDO, Low Iq, +CE, 1.5V±2%, 150mA	SOT-23-5	28cx	VR4	6b	Ons
LBUB	-	LP3964EMP-5.0	LVR-IC	Ultra-LDO, CE, 5V±1.5%, 800mA, Sense	SOT-223-5	27vry	VR18	6x	Nsc
LBV	-	NCP511SN18T1	LVR-IC	LDO, Low Iq, +CE, 1.8V±2%, 150mA	SOT-23-5	28cx	VR4	6b	Ons
LBVB	-	LP3965EMP-5.0	LVR-IC	Ultra-LDO, CE, 5V±1.5%, 1.5A, Sense	SOT-223-5	27vry	VR18	6x	Nsc
LBW	-	NCP511SN25T1	LVR-IC	LDO, Low Iq, +CE, 2.5V±2%, 150mA	SOT-23-5	28cx	VR4	6b	Ons
LBX	-	NCP511SN27T1	LVR-IC	LDO, Low Iq, +CE, 2.7V±2%, 150mA	SOT-23-5	28cx	VR4	6b	Ons
LBY	-	NCP511SN28T1	LVR-IC	LDO, Low Iq, +CE, 2.8V±2%, 150mA	SOT-23-5	28cx	VR4	6b	Ons
LBYA	-	LP2982AIM5-2.6	LVR-IC	Ultra-LDO, +CE, 2.6V±1%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
LBYB	-	LP2982IM5-2.6	LVR-IC	Ultra-LDO, +CE, 2.6V±1.5%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
LBZ	-	NCP511SN30T1	LVR-IC	LDO, Low Iq, +CE, 3V±2%, 150mA	SOT-23-5	28cx	VR4	6b	Ons
LBZA	-	LP2982AIM5-5.3	LVR-IC	Ultra-LDO, +CE, 5.3V±1%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
LBZB	-	LP2982IM5-5.3	LVR-IC	Ultra-LDO, +CE, 5.3V±1.5%, 50mA	SOT-23-5	28vrx	VR7	6g	Nsc
LC	-	AX6603-140B	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LC	-	BU4943FWE	Vdet-IC	4.3V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
LC	-	BU4943G	Vdet-IC	4.3V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
LC	-	HD74LV1G126ACM	CMOS-Log	Bus buffer gate with 3-state output	CMPAK-5	28	Log13	6a	Ren
LC	-	HD74LV1G126AVS	CMOS-Log	Bus buffer gate with 3-state output	VSON-5	30	Log13	6a	Ren
LC	-	IDT74LVC1G04ADY	CMOS-Log	Inverter	SO5-1	28	Log6	6g	Idt
LC	-	RT9168-27CBR	LVR-IC	LDO, 2.7V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
LC0	-	XC6219C312MR	LVR-IC	LDO, 3.1V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LC0	-	XC9236C20CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LC1	-	XC6219C322MR	LVR-IC	LDO, 3.2V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LC1	-	XC9236C21CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LC2	-	XC6219C332MR	LVR-IC	LDO, 3.3V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LC2	-	XC9236C22CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LC3	-	XC6219C342MR	LVR-IC	LDO, 3.4V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LC3	-	XC9236C23CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LC4	-	XC6219C352MR	LVR-IC	LDO, 3.5V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LC4	-	XC9236C24CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LC5	-	XC6219C362MR	LVR-IC	LDO, 3.6V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LC5	-	XC9236C25CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LC6	-	XC6219C372MR	LVR-IC	LDO, 3.7V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LC6	-	XC9236C26CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LC7	-	XC6219C382MR	LVR-IC	LDO, 3.8V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LC7	-	XC9236C27CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LC8	-	XC6219C392MR	LVR-IC	LDO, 3.9V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LC8	-	XC9236C28CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LC9	-	XC6219C402MR	LVR-IC	LDO, 4.0V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LC9	-	XC9236C29CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LCA	-	NCP511SN33T1	LVR-IC	LDO, Low Iq, +CE, 3.3V±2%, 150mA	SOT-23-5	28cx	VR4	6b	Ons
LCA	-	XC6219C412MR	LVR-IC	LDO, 4.1V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LCA	-	XC9236C2ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LCB	-	NCP511SN50T1	LVR-IC	LDO, Low Iq, +CE, 5V±2%, 150mA	SOT-23-5	28cx	VR4	6b	Ons
LCB	-	XC6219C422MR	LVR-IC	LDO, 4.2V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LCB	-	XC9236C2BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LCC	-	NCP502SQ15T1	LVR-IC	Low Iq, +CE, 1.5V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LCC	-	XC6219C432MR	LVR-IC	LDO, 4.3V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LCC	-	XC9236C2CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LCD	-	NCP502SQ18T1	LVR-IC	Low Iq, +CE, 1.8V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LCD	-	XC6219C442MR	LVR-IC	LDO, 4.4V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LCD	-	XC9236C2DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LCDA	-	LP2985AIM5-2.0	LVR-IC	Ultra-LDO, 2.0V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LCDB	-	LP2985IM5-2.0	LVR-IC	Ultra-LDO, 2.0V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LCE	-	NCP502SQ25T1	LVR-IC	Low Iq, +CE, 2.5V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LCE	-	XC6219C452MR	LVR-IC	LDO, 4.5V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LCE	-	XC9236C2ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LCEA	-	LP2985AIM5-2.6	LVR-IC	Ultra-LDO, 2.6V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LCEB	-	LP2985IM5-2.6	LVR-IC	Ultra-LDO, 2.6V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LCF	-	NCP502SQ27T1	LVR-IC	Low Iq, +CE, 2.7V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LCF	-	XC6219C462MR	LVR-IC	LDO, 4.6V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LCF	-	XC9236C2FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LCG	-	NCP502SQ28T1	LVR-IC	Low Iq, +CE, 2.8V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LCH	-	NCP502SQ30T1	LVR-IC	Low Iq, +CE, 3V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LCH	-	XC6219C472MR	LVR-IC	LDO, 4.7V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LCH	-	XC9236C2HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LCHA	-	LP2985AIM5-1.5	LVR-IC	Ultra-LDO, 1.5V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LCHB	-	LP2985IM5-1.5	LVR-IC	Ultra-LDO, 1.5V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LCI	-	NCP502SQ33T1	LVR-IC	Low Iq, +CE, 3.3V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LCJ	-	NCP502SQ50T1	LVR-IC	Low Iq, +CE, 5V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LCK	-	NCP512SQ15T1	LVR-IC	Low Iq, +CE, 1.5V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LCK	-	XC6219C482MR	LVR-IC	LDO, 4.8V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LCK	-	XC9236C2KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LCL	-	NCP512SQ18T1	LVR-IC	Low Iq, +CE, 1.8V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LCL	-	XC6219C492MR	LVR-IC	LDO, 4.9V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LCL	-	XC9236C2LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LCM	-	NCP512SQ25T1	LVR-IC	Low Iq, +CE, 2.5V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LCM	-	XC6219C502MR	LVR-IC	LDO, 5.0V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LCM	-	XC9236C2MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LCN	-	NCP512SQ27T1	LVR-IC	Low Iq, +CE, 2.7V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LCO	-	NCP512SQ28T1	LVR-IC	Low Iq, +CE, 2.8V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LCP	-	NCP512SQ30T1	LVR-IC	Low Iq, +CE, 3V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LCQ	-	NCP512SQ33T1	LVR-IC	Low Iq, +CE, 3.3V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LCR	-	NCP512SQ50T1	LVR-IC	Low Iq, +CE, 5V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LCS	-	NCP500SN18T1	LVR-IC	LDO, LN, +CE, 1.8V±2.5%, 150mA	SOT-353	30cx	VR4	6b	Ons
LCU	-	NCP500SN27T1	LVR-IC	LDO, LN, +CE, 2.7V±2.5%, 150mA	SOT-353	30cx	VR4	6b	Ons
LCV	-	NCP500SN28T1	LVR-IC	LDO, LN, +CE, 2.8V±2.5%, 150mA	SOT-353	30cx	VR4	6b	Ons
LCW	-	NCP500SN30T1	LVR-IC	LDO, LN, +CE, 3V±2.5%, 150mA	SOT-353	30cx	VR4	6b	Ons
LCX	-	NCP500SN33T1	LVR-IC	LDO, LN, +CE, 3.3V±2.5%, 150mA	SOT-353	30cx	VR4	6b	Ons
LCY	-	NCP500SN50T1	LVR-IC	LDO, LN, +CE, 5V±2.5%, 150mA	SOT-353	30cx	VR4	6b	Ons
Ld	-	AX6603-350B	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LD	-	AX6603-150B	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LD	-	BU4944FWE	Vdet-IC	4.4V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
LD	-	BU4944G	Vdet-IC	4.4V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
LD	-	IDT74LVC1GU04ADY	CMOS-Log	Inverter	SO5-1	28	Log6	6g	Idt
LD	-	RT9168-28CBR	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
LD0	-	XC6219D312MR	LVR-IC	LDO, 3.1V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LD0	-	XC9236C30CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LD0	es	BL8534CB5TR30	DC-DC-IC	PFM step-up, 3.0V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6g	Shb
LD0	ex	BL8534CB5TR50	DC-DC-IC	PFM step-up, 5.0V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6g	Shb
LD0	ey	BL8534CB5TR60	DC-DC-IC	PFM step-up, 6.0V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6g	Shb
LD0	ez	BL8534CB5TR40	DC-DC-IC	PFM step-up, 4.0V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6g	Shb
LD1	-	XC6219D322MR	LVR-IC	LDO, 3.2V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LD1	-	XC9236C31CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LD15G	-	LD1985G-15-AF5	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LD15L	-	LD1985L-15-AF5	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LD18G	-	LD1985G-18-AF5	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LD18L	-	LD1985L-18-AF5	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LD2	-	XC6219D332MR	LVR-IC	LDO, 3.3V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LD2	-	XC9236C32CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LD2	ez	BL8534CB5TR42	DC-DC-IC	PFM step-up, 4.2V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6g	Shb
LD25	-	MIC5206-2.5BM5	LVR-IC	LDO, Low noise, 2.5V±1%, 150mA, +CE, -Error	SOT-23-5	28w	VR17	6g	Mcr
LD25	fb	MIC5206-2.5YM5	LVR-IC	LDO, Low noise, 2.5V±1%, 150mA, +CE, -Error, Pb. Free	SOT-23-5	28w	VR17	6g	Mcr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LD25G	-	LD1985G-25-AF5	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LD25L	-	LD1985L-25-AF5	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LD27	-	MIC5206-2.7BM5	LVR-IC	LDO, Low noise, 2.7V±1%, 150mA, +CE, -Error	SOT-23-5	28w	VR17	6g	Mcr
LD27	fb	MIC5206-2.7YM5	LVR-IC	LDO, Low noise, 2.7V±1%, 150mA, +CE, -Error, Pb. Free	SOT-23-5	28w	VR17	6g	Mcr
LD28G	-	LD1985G-28-AF5	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LD28L	-	LD1985L-28-AF5	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LD2JG	-	LD1985G-2J-AF5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LD2JL	-	LD1985L-2J-AF5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LD3	-	XC6219D342MR	LVR-IC	LDO, 3.4V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LD3	-	XC9236C33CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LD3	es	BL8534CB5TR33	DC-DC-IC	PFM step-up, 3.3V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6g	Shb
LD30	-	MIC5206-3.0BM5	LVR-IC	LDO, Low noise, 3.0V±1%, 150mA, +CE, -Error	SOT-23-5	28w	VR17	6g	Mcr
LD30	fb	MIC5206-3.0YM5	LVR-IC	LDO, Low noise, 3.0V±1%, 150mA, +CE, -Error, Pb. Free	SOT-23-5	28w	VR17	6g	Mcr
LD30G	-	LD1985G-30-AF5	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LD30L	-	LD1985L-30-AF5	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LD31G	-	LD1985G-31-AF5	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LD31L	-	LD1985L-31-AF5	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LD32	-	MIC5206-3.2BM5	LVR-IC	LDO, Low noise, 3.2V±1%, 150mA, +CE, -Error	SOT-23-5	28w	VR17	6g	Mcr
LD32	fb	MIC5206-3.2YM5	LVR-IC	LDO, Low noise, 3.2V±1%, 150mA, +CE, -Error, Pb. Free	SOT-23-5	28w	VR17	6g	Mcr
LD32G	-	LD1985G-32-AF5	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LD32L	-	LD1985L-32-AF5	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LD33	-	MIC5206-3.3BM5	LVR-IC	LDO, Low noise, 3.3V±1%, 150mA, +CE, -Error	SOT-23-5	28w	VR17	6g	Mcr
LD33	fb	MIC5206-3.3YM5	LVR-IC	LDO, Low noise, 3.3V±1%, 150mA, +CE, -Error, Pb. Free	SOT-23-5	28w	VR17	6g	Mcr
LD33G	-	LD1985G-33-AF5	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LD33L	-	LD1985L-33-AF5	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LD35G	-	LD1985G-35-AF5	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LD35L	-	LD1985L-35-AF5	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LD36	-	MIC5206-3.6BM5	LVR-IC	LDO, Low noise, 3.6V±1%, 150mA, +CE, -Error	SOT-23-5	28w	VR17	6g	Mcr
LD36	fb	MIC5206-3.6YM5	LVR-IC	LDO, Low noise, 3.6V±1%, 150mA, +CE, -Error, Pb. Free	SOT-23-5	28w	VR17	6g	Mcr
LD36G	-	LD1985G-36-AF5	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LD36L	-	LD1985L-36-AF5	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LD38	-	MIC5206-3.8BM5	LVR-IC	LDO, Low noise, 3.8V±1%, 150mA, +CE, -Error	SOT-23-5	28w	VR17	6g	Mcr
LD38	fb	MIC5206-3.8YM5	LVR-IC	LDO, Low noise, 3.8V±1%, 150mA, +CE, -Error, Pb. Free	SOT-23-5	28w	VR17	6g	Mcr
LD38G	-	LD1985G-38-AF5	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LD38L	-	LD1985L-38-AF5	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LD4	-	XC6219D352MR	LVR-IC	LDO, 3.5V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LD4	-	XC9236C34CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LD40	-	MIC5206-4.0BM5	LVR-IC	LDO, Low noise, 4.0V±1%, 150mA, +CE, -Error	SOT-23-5	28w	VR17	6g	Mcr
LD40	fb	MIC5206-4.0YM5	LVR-IC	LDO, Low noise, 4.0V±1%, 150mA, +CE, -Error, Pb. Free	SOT-23-5	28w	VR17	6g	Mcr
LD40G	-	LD1985G-40-AF5	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LD40L	-	LD1985L-40-AF5	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LD47G	-	LD1985G-47-AF5	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LD47L	-	LD1985L-47-AF5	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LD5	-	XC6219D362MR	LVR-IC	LDO, 3.6V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LD5	-	XC9236C35CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LD5	ez	BL8534CB5TR45	DC-DC-IC	PFM step-up, 4.5V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6g	Shb
LD5	fa	BL8534CB5TR25	DC-DC-IC	PFM step-up, 2.5V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6g	Shb
LD50	-	MIC5206-5.0BM5	LVR-IC	LDO, Low noise, 5.0V±1%, 150mA, +CE, -Error	SOT-23-5	28w	VR17	6g	Mcr
LD50	fb	MIC5206-5.0YM5	LVR-IC	LDO, Low noise, 5.0V±1%, 150mA, +CE, -Error, Pb. Free	SOT-23-5	28w	VR17	6g	Mcr
LD50G	-	LD1985G-50-AF5	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LD50L	-	LD1985L-50-AF5	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LD6	-	XC6219D372MR	LVR-IC	LDO, 3.7V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LD6	-	XC9236C36CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LD6	es	BL8534CB5TR36	DC-DC-IC	PFM step-up, 3.6V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6g	Shb
LD7	-	XC6219D382MR	LVR-IC	LDO, 3.8V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LD7	-	XC9236C37CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LD7	fa	BL8534CB5TR27	DC-DC-IC	PFM step-up, 2.7V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6g	Shb
LD8	-	XC6219D392MR	LVR-IC	LDO, 3.9V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LD8	-	XC9236C38CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LD8	es	BL8534CB5TR38	DC-DC-IC	PFM step-up, 3.8V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6g	Shb
LD8	fa	BL8534CB5TR28	DC-DC-IC	PFM step-up, 2.8V±2%, 200mA, +CE	SOT-23-5	28sc	DC3	6g	Shb
LD9	-	XC6219D402MR	LVR-IC	LDO, 4.0V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LD9	-	XC9236C39CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LDA	-	NCP561SN15T1	LVR-IC	LDO, Low Iq, +CE, 1.5V±2%, 150mA	SOT-353	30cx	VR4	6b	Ons
LDA	-	XC6219D412MR	LVR-IC	LDO, 4.1V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LDA	-	XC9236C3ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LDA5G	-	LD2985G-15-AF5	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LDA5L	-	LD2985L-15-AF5	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LDA8G	-	LD2985G-18-AF5	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LDA8L	-	LD2985L-18-AF5	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LDB	-	XC6219D422MR	LVR-IC	LDO, 4.2V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LDB	-	XC9236C3BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LDB5G	-	LD2985G-25-AF5	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LDB5L	-	LD2985L-25-AF5	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LDB8G	-	LD2985G-28-AF5	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LDB8L	-	LD2985L-28-AF5	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LDBJG	-	LD2985G-2J-AF5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LDBJL	-	LD2985L-2J-AF5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LDC	-	NCP561SN25T1	LVR-IC	LDO, Low Iq, +CE, 2.5V±2%, 150mA	SOT-353	30cx	VR4	6b	Ons
LDC	-	XC6219D432MR	LVR-IC	LDO, 4.3V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LDC	-	XC9236C3CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LDC0G	-	LD2985G-30-AF5	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LDC0L	-	LD2985L-30-AF5	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LDC1G	-	LD2985G-31-AF5	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LDC1L	-	LD2985L-31-AF5	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LDC2G	-	LD2985G-32-AF5	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LDC2L	-	LD2985L-32-AF5	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LDC3G	-	LD2985G-33-AF5	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LDC3L	-	LD2985L-33-AF5	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LDC5G	-	LD2985G-35-AF5	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LDC5L	-	LD2985L-35-AF5	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LDC6G	-	LD2985G-36-AF5	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LDC6L	-	LD2985L-36-AF5	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LDC8G	-	LD2985G-38-AF5	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LDC8L	-	LD2985L-38-AF5	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LDD	-	NCP561SN28T1	LVR-IC	LDO, Low Iq, +CE, 2.8V±2%, 150mA	SOT-353	30cx	VR4	6b	Ons
LDD	-	XC6219D442MR	LVR-IC	LDO, 4.4V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LDD	-	XC9236C3DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LDD0G	-	LD2985G-40-AF5	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LDD0L	-	LD2985L-40-AF5	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LDD7G	-	LD2985G-47-AF5	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LDD7L	-	LD2985L-47-AF5	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LDE	-	ADP3309ART-2.5-R	LVR-IC	LDO, 2.5V±1.2%, 100mA, -Shutdown, -Error	SOT-23-5	28c7	VR8	6a	Ad
LDE	-	NCP561SN30T1	LVR-IC	LDO, Low Iq, +CE, 3V±2%, 150mA	SOT-353	30cx	VR4	6b	Ons
LDE	-	XC6219D452MR	LVR-IC	LDO, 4.5V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LDE	-	XC9236C3ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LDE0G	-	LD2985G-50-AF5	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, Halogen-free	SOT-23-5	28vrx	VR7	6a	Utc
LDE0L	-	LD2985L-50-AF5	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, Lead-free	SOT-23-5	28vrx	VR7	6a	Utc
LDF	-	NCP561SN33T1	LVR-IC	LDO, Low Iq, +CE, 3.3V±2%, 150mA	SOT-353	30cx	VR4	6b	Ons
LDF	-	XC6219D462MR	LVR-IC	LDO, 4.6V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LDF	-	XC9236C3FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LDH	-	NCP561SN50T1	LVR-IC	LDO, Low Iq, +CE, 5V±2%, 150mA	SOT-353	30cx	VR4	6b	Ons
LDH	-	XC6219D472MR	LVR-IC	LDO, 4.7V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LDH	-	XC9236C3HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LDK	-	XC6219D482MR	LVR-IC	LDO, 4.8V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LDK	-	XC9236C3KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LDL	-	XC6219D492MR	LVR-IC	LDO, 4.9V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LDL	-	XC9236C3LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LDM	-	XC6219D502MR	LVR-IC	LDO, 5.0V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LDM	-	XC9236C3MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LDS	-	ADP150AUJZ-1.8-R7	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	UJ-5	28cx	VR4	6a	Ad
LDZ	-	ADP150AUJZ-2.5-R7	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	UJ-5	28cx	VR4	6a	Ad
LDZ	-	NCP5426SNT13T1	LVR-IC	LDO, Low Iq, +CE, UVLO, 1.3V±2%, 150mA	SOT-23-5	28vc	VR4	6b	Ons
Le	-	AX6603-360B	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LE	-	AX6603-160B	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LE	-	BU4945FWE	Vdet-IC	4.5V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
LE	-	BU4945G	Vdet-IC	4.5V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
LE	-	IDT74LVC1G08ADY	CMOS-Log	2-input AND gate	SO5-1	28	Log3	6g	Idt
LE	-	RT9168-29CBR	LVR-IC	LDO, 2.9V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
LE0	-	XC9236C40CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LE13	-	MIC5207-1.3BM5	LVR-IC	LDO, Low noise, 1.3V±2%, 180mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LE13	fb	MIC5207-1.3YM5	LVR-IC	LDO, Low noise, 1.3V±2%, 180mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LE18	-	MIC5207-1.8BM5	LVR-IC	LDO, Low noise, 1.8V±2%, 180mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LE18	fb	MIC5207-1.8YM5	LVR-IC	LDO, Low noise, 1.8V±2%, 180mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LE2	-	ADP150AUJZ-3.0-R7	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	UJ-5	28cx	VR4	6a	Ad
LE25	-	MIC5207-2.5BM5	LVR-IC	LDO, Low noise, 2.5V±2%, 180mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LE25	fb	MIC5207-2.5YM5	LVR-IC	LDO, Low noise, 2.5V±2%, 180mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LE28	-	MIC5207-2.8BM5	LVR-IC	LDO, Low noise, 2.8V±2%, 180mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LE28	fb	MIC5207-2.8YM5	LVR-IC	LDO, Low noise, 2.8V±2%, 180mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LE29	-	MIC5207-2.9BM5	LVR-IC	LDO, Low noise, 2.9V±2%, 180mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LE29	fb	MIC5207-2.9YM5	LVR-IC	LDO, Low noise, 2.9V±2%, 180mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LE3	-	ADP150AUJZ-2.8-R7	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	UJ-5	28cx	VR4	6a	Ad
LE30	-	MIC5207-3.0BM5	LVR-IC	LDO, Low noise, 3.0V±2%, 180mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LE30	fb	MIC5207-3.0YM5	LVR-IC	LDO, Low noise, 3.0V±2%, 180mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LE31	-	MIC5207-3.1BM5	LVR-IC	LDO, Low noise, 3.1V±2%, 180mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LE31	fb	MIC5207-3.1YM5	LVR-IC	LDO, Low noise, 3.1V±2%, 180mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LE32	-	MIC5207-3.2BM5	LVR-IC	LDO, Low noise, 3.2V±2%, 180mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LE32	fb	MIC5207-3.2YM5	LVR-IC	LDO, Low noise, 3.2V±2%, 180mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LE33	-	MIC5207-3.3BM5	LVR-IC	LDO, Low noise, 3.3V±2%, 180mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LE33	fb	MIC5207-3.3YM5	LVR-IC	LDO, Low noise, 3.3V±2%, 180mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LE36	-	MIC5207-3.6BM5	LVR-IC	LDO, Low noise, 3.6V±2%, 180mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LE36	fb	MIC5207-3.6YM5	LVR-IC	LDO, Low noise, 3.6V±2%, 180mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LE38	-	MIC5207-3.8BM5	LVR-IC	LDO, Low noise, 3.8V±2%, 180mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LE38	fb	MIC5207-3.8YM5	LVR-IC	LDO, Low noise, 3.8V±2%, 180mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LE40	-	MIC5207-4.0BM5	LVR-IC	LDO, Low noise, 4.0V±2%, 180mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LE40	fb	MIC5207-4.0YM5	LVR-IC	LDO, Low noise, 4.0V±2%, 180mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LE50	-	MIC5207-5.0BM5	LVR-IC	LDO, Low noise, 5.0V±2%, 180mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LE50	fb	MIC5207-5.0YM5	LVR-IC	LDO, Low noise, 5.0V±2%, 180mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LE6	-	ADP122AUJZ-2.5-R7	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	UJ-5	28cx	VR4	6a	Ad
LE8	-	XC6219A09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LE9	-	ADP122AUJZ-2.7-R7	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	UJ-5	28cx	VR4	6a	Ad
LE9	-	XC6219A10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LEA	-	ADP122AUJZ-2.8-R7	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	UJ-5	28cx	VR4	6a	Ad
LEA	-	XC6219A11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LEAA	-	MIC5207BM5	LVR-IC	LDO, Low noise, Adj.1.3..5.0V±2%, 180mA, +CE	SOT-23-5	28e	VR16	6g	Mcr
LEAA	fb	MIC5207YM5	LVR-IC	LDO, Low noise, Adj.1.3..5.0V±2%, 180mA, +CE, Pb-free	SOT-23-5	28e	VR16	6g	Mcr
LEB	-	XC6219A12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LEC	-	ADP122AUJZ-2.85-R7	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	UJ-5	28cx	VR4	6a	Ad
LEC	-	XC6219A13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LED	-	ADP122AUJZ-2.9-R7	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	UJ-5	28cx	VR4	6a	Ad
LED	-	XC6219A14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LEE	-	ADP122AUJZ-3.0-R7	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	UJ-5	28cx	VR4	6a	Ad
LEE	-	XC6219A15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LEF	-	ADP122AUJZ-3.3-R7	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	UJ-5	28cx	VR4	6a	Ad
LEF	-	XC6219A16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LEG	-	ADP123AUJZ-R7	LVR-IC	LDO, Adjustable 0.8..5.0V±1%, 300mA, +CE	UJ-5	28sg	VR5	6a	Ad
LEH	-	XC6219A17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LEJ	-	ADP150AUJZ-3.3-R7	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	UJ-5	28cx	VR4	6a	Ad
LEK	-	XC6219A18AMR	LVR-IC	LDO, 1.85V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LEL	-	XC6219A19AMR	LVR-IC	LDO, 1.95V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LEM	-	XC6219A20AMR	LVR-IC	LDO, 2.05V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LEN	-	XC6219A21AMR	LVR-IC	LDO, 2.15V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LEP	-	XC6219A22AMR	LVR-IC	LDO, 2.25V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LER	-	XC6219A23AMR	LVR-IC	LDO, 2.35V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LES	-	XC6219A24AMR	LVR-IC	LDO, 2.45V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LET	-	XC6219A25AMR	LVR-IC	LDO, 2.55V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LEU	-	XC6219A26AMR	LVR-IC	LDO, 2.65V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LEV	-	NCP561SN18T1	LVR-IC	LDO, Low Iq, +CE, 1.8V±2%, 150mA	SOT-353	30cx	VR4	6b	Ons
LEV	-	XC6219A27AMR	LVR-IC	LDO, 2.75V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LEX	-	NCP561SN27T1	LVR-IC	LDO, Low Iq, +CE, 2.7V±2%, 150mA	SOT-353	30cx	VR4	6b	Ons
LEX	-	XC6219A28AMR	LVR-IC	LDO, 2.85V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LEY	-	XC6219A29AMR	LVR-IC	LDO, 2.95V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LEZ	-	XC6219A30AMR	LVR-IC	LDO, 3.05V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
Lf	-	AX6603-370B	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LF	-	AX6603-170B	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LF	-	BU4946FWE	Vdet-IC	4.6V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
LF	-	BU4946G	Vdet-IC	4.6V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
LF	-	IDT74LVC1G14ADY	CMOS-Log	Inverting Schmitt-trigger	SO5-1	28	Log7	6g	Idt
LF	-	RT9168-30CBR	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
LF6A	-	LP2985AIM5-6.1	LVR-IC	Ultra-LDO, 6.1V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LF6B	-	LP2985IM5-6.1	LVR-IC	Ultra-LDO, 6.1V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LF7A	-	LP2985AIM5-135	LVR-IC	Ultra-LDO, 1.35V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LF7B	-	LP2985IM5-135	LVR-IC	Ultra-LDO, 1.35V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LF8	-	XC6219B09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LF8	-	XC9236C08DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LF9	-	XC6219B10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LF9	-	XC9236C09DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LFA	-	XC6219B11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFB	-	XC6219B12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFC	-	XC6219B13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LFD	-	XC6219B14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFE	-	XC6219B15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFF	-	XC6219B16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFH	-	XC6219B17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFK	-	XC6219B18AMR	LVR-IC	LDO, 1.85V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFL	-	XC6219B19AMR	LVR-IC	LDO, 1.95V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFL	-	XC9236C0LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LFM	-	XC6219B20AMR	LVR-IC	LDO, 2.05V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFM	-	XC9236C0MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LFN	-	XC6219B21AMR	LVR-IC	LDO, 2.15V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFO	-	NCP512SQ31T1	LVR-IC	Low Iq, +CE, 3.1V±2%, 80mA	SOT-353	30cx	VR4	6b	Ons
LFP	-	XC6219B22AMR	LVR-IC	LDO, 2.25V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFR	-	XC6219B23AMR	LVR-IC	LDO, 2.35V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFS	-	XC6219B24AMR	LVR-IC	LDO, 2.45V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFT	-	XC6219B25AMR	LVR-IC	LDO, 2.55V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFU	-	XC6219B26AMR	LVR-IC	LDO, 2.65V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFV	-	XC6219B27AMR	LVR-IC	LDO, 2.75V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFX	-	XC6219B28AMR	LVR-IC	LDO, 2.85V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFY	-	XC6219B29AMR	LVR-IC	LDO, 2.95V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LFZ	-	XC6219B30AMR	LVR-IC	LDO, 3.05V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
Lg	-	AX6603-380B	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LG	-	2SC4207-GR	Si-npn	Dual, AF, 60V, 150mA, 300mW, B=200..400, >80MHz	SOT-25	28	T11	6a	Tos
LG	-	2SC4944-GR	Si-npn	Dual, AF, 60V, 150mA, 200mW, B=200..400, >80MHz	SOT-25	28	T11	6a	Tos
LG	-	AX6603-180B	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LG	-	BU4947FWE	Vdet-IC	4.7V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
LG	-	BU4947G	Vdet-IC	4.7V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
LG	-	IDT74LVC1G32ADY	CMOS-Log	2-input OR gate	SO5-1	28	Log4	6g	Idt
LG	-	RT9168-31CBR	LVR-IC	LDO, 3.1V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
LG18	-	MIC5219-1.8BM5	LVR-IC	LDO, 1.8V±1%, 500mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LG18	fb	MIC5219-1.8YM5	LVR-IC	LDO, 1.8V±1%, 500mA, +CE, Pb Free	SOT-23-5	28vrx	VR7	6g	Mcr
LG25	-	MIC5219-2.5BM5	LVR-IC	LDO, 2.5V±1%, 500mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LG25	fb	MIC5219-2.5YM5	LVR-IC	LDO, 2.5V±1%, 500mA, +CE, Pb Free	SOT-23-5	28vrx	VR7	6g	Mcr
LG26	-	MIC5219-2.6BM5	LVR-IC	LDO, 2.6V±1%, 500mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LG26	fb	MIC5219-2.6YM5	LVR-IC	LDO, 2.6V±1%, 500mA, +CE, Pb Free	SOT-23-5	28vrx	VR7	6g	Mcr
LG27	-	MIC5219-2.7BM5	LVR-IC	LDO, 2.7V±1%, 500mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LG27	fb	MIC5219-2.7YM5	LVR-IC	LDO, 2.7V±1%, 500mA, +CE, Pb Free	SOT-23-5	28vrx	VR7	6g	Mcr
LG28	-	MIC5219-2.8BM5	LVR-IC	LDO, 2.8V±1%, 500mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LG28	fb	MIC5219-2.8YM5	LVR-IC	LDO, 2.8V±1%, 500mA, +CE, Pb Free	SOT-23-5	28vrx	VR7	6g	Mcr
LG29	-	MIC5219-2.9BM5	LVR-IC	LDO, 2.9V±1%, 500mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LG29	fb	MIC5219-2.9YM5	LVR-IC	LDO, 2.9V±1%, 500mA, +CE, Pb Free	SOT-23-5	28vrx	VR7	6g	Mcr
LG2J	-	MIC5219-2.85BM5	LVR-IC	LDO, 2.85V±1%, 500mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LG2J	fb	MIC5219-2.85YM5	LVR-IC	LDO, 2.85V±1%, 500mA, +CE, Pb Free	SOT-23-5	28vrx	VR7	6g	Mcr
LG30	-	MIC5219-3.0BM5	LVR-IC	LDO, 3.0V±1%, 500mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LG30	fb	MIC5219-3.0YM5	LVR-IC	LDO, 3.0V±1%, 500mA, +CE, Pb Free	SOT-23-5	28vrx	VR7	6g	Mcr
LG31	-	MIC5219-3.1BM5	LVR-IC	LDO, 3.1V±1%, 500mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LG31	fb	MIC5219-3.1YM5	LVR-IC	LDO, 3.1V±1%, 500mA, +CE, Pb Free	SOT-23-5	28vrx	VR7	6g	Mcr
LG33	-	MIC5219-3.3BM5	LVR-IC	LDO, 3.3V±1%, 500mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LG33	fb	MIC5219-3.3YM5	LVR-IC	LDO, 3.3V±1%, 500mA, +CE, Pb Free	SOT-23-5	28vrx	VR7	6g	Mcr
LG36	-	MIC5219-3.6BM5	LVR-IC	LDO, 3.6V±1%, 500mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LG36	fb	MIC5219-3.6YM5	LVR-IC	LDO, 3.6V±1%, 500mA, +CE, Pb Free	SOT-23-5	28vrx	VR7	6g	Mcr
LG50	-	MIC5219-5.0BM5	LVR-IC	LDO, 5.0V±1%, 500mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LG50	fb	MIC5219-5.0YM5	LVR-IC	LDO, 5.0V±1%, 500mA, +CE, Pb Free	SOT-23-5	28vrx	VR7	6g	Mcr
LGAA	-	MIC5219BM5	LVR-IC	LDO, Adj. 0.9..5.0V2%, 500mA, +CE	SOT-23-5	28e	VR16	6g	Mcr
LGAA	fb	MIC5219YM5	LVR-IC	LDO, Adj. 0.9..5.0V2%, 500mA, +CE, Pb Free	SOT-23-5	28e	VR16	6g	Mcr
Lh	-	AX6603-390B	LVR-IC	LDO, 3.9V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LH	-	AX6603-190B	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LH	-	BU4948FWE	Vdet-IC	4.8V±1%, +Reset PPO	VSOF-5	30vk	VD7	6e	Rhm
LH	-	BU4948G	Vdet-IC	4.8V±1%, +Reset PPO	SSOP-5	28vdm	VD7	6c	Rhm
LH	-	IDT74LVC1G86ADY	CMOS-Log	2-input EXCLUSIVE-OR gate	SO5-1	28	Log5	6g	Idt
LH	-	RT9168-32CBR	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
LH0	-	XC9236C10DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LH1	-	XC9236C11DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LH2	-	XC9236C12DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LH25	-	MIC5216-2.5BM5	LVR-IC	LDO, 2.5V±1%, 500mA, +CE, Flag	SOT-23-5	28ei	VR8	6g	Mcr
LH25	fb	MIC5216-2.5YM5	LVR-IC	LDO, 2.5V±1%, 500mA, +CE, Flag, Pb-free	SOT-23-5	28ei	VR8	6g	Mcr
LH3	-	XC9236C13DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LH33	-	MIC5216-3.3BM5	LVR-IC	LDO, 3.3V±1%, 500mA, +CE, Flag	SOT-23-5	28ei	VR8	6g	Mcr
LH33	fb	MIC5216-3.3YM5	LVR-IC	LDO, 3.3V±1%, 500mA, +CE, Flag, Pb-free	SOT-23-5	28ei	VR8	6g	Mcr
LH36	-	MIC5216-3.6BM5	LVR-IC	LDO, 3.6V±1%, 500mA, +CE, Flag	SOT-23-5	28ei	VR8	6g	Mcr
LH36	fb	MIC5216-3.6YM5	LVR-IC	LDO, 3.6V±1%, 500mA, +CE, Flag, Pb-free	SOT-23-5	28ei	VR8	6g	Mcr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LH4	-	XC9236C14DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LH5	-	XC9236C15DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LH50	-	MIC5216-5.0BM5	LVR-IC	LDO, 5.0V±1%, 500mA, +CE, Flag	SOT-23-5	28ei	VR8	6g	Mcr
LH50	fb	MIC5216-5.0YM5	LVR-IC	LDO, 5.0V±1%, 500mA, +CE, Flag, Pb-free	SOT-23-5	28ei	VR8	6g	Mcr
LH6	-	XC9236C16DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LH7	-	XC9236C17DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LH8	-	XC6219C09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LH8	-	XC9236C18DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LH9	-	XC6219C10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LH9	-	XC9236C19DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LHA	-	XC6219C11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHA	-	XC9236C1ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LHB	-	XC6219C12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHB	-	XC9236C1BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LHC	-	XC6219C13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHC	-	XC9236C1CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LHD	-	XC6219C14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHD	-	XC9236C1DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LHE	-	XC6219C15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHE	-	XC9236C1EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LHF	-	XC6219C16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHF	-	XC9236C1FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LHH	-	XC6219C17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHH	-	XC9236C1HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LHK	-	XC6219C18AMR	LVR-IC	LDO, 1.85V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHK	-	XC9236C1KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LHL	-	XC6219C19AMR	LVR-IC	LDO, 1.95V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHL	-	XC9236C1LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LHM	-	XC6219C20AMR	LVR-IC	LDO, 2.05V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHM	-	XC9236C1MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LHN	-	XC6219C21AMR	LVR-IC	LDO, 2.15V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHP	-	XC6219C22AMR	LVR-IC	LDO, 2.25V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHR	-	XC6219C23AMR	LVR-IC	LDO, 2.35V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHS	-	XC6219C24AMR	LVR-IC	LDO, 2.45V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHT	-	XC6219C25AMR	LVR-IC	LDO, 2.55V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHU	-	XC6219C26AMR	LVR-IC	LDO, 2.65V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHV	-	XC6219C27AMR	LVR-IC	LDO, 2.75V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHX	-	XC6219C28AMR	LVR-IC	LDO, 2.85V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHY	-	XC6219C29AMR	LVR-IC	LDO, 2.95V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LHZ	-	XC6219C30AMR	LVR-IC	LDO, 3.05V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LJ	-	AX6603-200B	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LJ	-	BU20UB3WG	LVR-IC	LDO, 2.0V±1%, 360mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
LJ	-	RT9168-33CBR	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
LJ-	-	RT9168-33PBR	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
Lk	-	AX6603-400B	LVR-IC	LDO, 4.0V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LK	-	AX6603-210B	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LK	-	RT9168-34CBR	LVR-IC	LDO, 3.4V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
LK0	-	XC9236C20DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LK1	-	XC9236C21DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LK2	-	XC9236C22DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LK26	-	MIC5203-2.6BM5	LVR-IC	LDO, 2.6V±1%, 80mA, +CE	SOT-23-5	28cx	VR4	6g	Mcr
LK26	fb	MIC5203-2.6YM5	LVR-IC	LDO, 2.6V±1%, 80mA, +CE, Pb. Free	SOT-23-5	28cx	VR4	6g	Mcr
LK28	-	MIC5203-2.8BM5	LVR-IC	LDO, 2.8V±1%, 80mA, +CE	SOT-23-5	28cx	VR4	6g	Mcr
LK28	fb	MIC5203-2.8YM5	LVR-IC	LDO, 2.8V±1%, 80mA, +CE, Pb. Free	SOT-23-5	28cx	VR4	6g	Mcr
LK3	-	XC9236C23DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LK30	-	MIC5203-3.0BM5	LVR-IC	LDO, 3V±1%, 80mA, +CE	SOT-23-5	28cx	VR4	6g	Mcr
LK30	fb	MIC5203-3.0YM5	LVR-IC	LDO, 3V±1%, 80mA, +CE, Pb. Free	SOT-23-5	28cx	VR4	6g	Mcr
LK33	-	MIC5203-3.3BM5	LVR-IC	LDO, 3.3V±1%, 80mA, +CE	SOT-23-5	28cx	VR4	6g	Mcr
LK33	fb	MIC5203-3.3YM5	LVR-IC	LDO, 3.3V±1%, 80mA, +CE, Pb. Free	SOT-23-5	28cx	VR4	6g	Mcr
LK36	-	MIC5203-3.6BM5	LVR-IC	LDO, 3.6V±1%, 80mA, +CE	SOT-23-5	28cx	VR4	6g	Mcr
LK36	fb	MIC5203-3.6YM5	LVR-IC	LDO, 3.6V±1%, 80mA, +CE, Pb. Free	SOT-23-5	28cx	VR4	6g	Mcr
LK38	-	MIC5203-3.8BM5	LVR-IC	LDO, 3.8V±1%, 80mA, +CE	SOT-23-5	28cx	VR4	6g	Mcr
LK38	fb	MIC5203-3.8YM5	LVR-IC	LDO, 3.8V±1%, 80mA, +CE, Pb. Free	SOT-23-5	28cx	VR4	6g	Mcr
LK4	-	XC9236C24DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LK40	-	MIC5203-4.0BM5	LVR-IC	LDO, 4.0V±1%, 80mA, +CE	SOT-23-5	28cx	VR4	6g	Mcr
LK40	fb	MIC5203-4.0YM5	LVR-IC	LDO, 4.0V±1%, 80mA, +CE, Pb. Free	SOT-23-5	28cx	VR4	6g	Mcr
LK45	-	MIC5203-4.5BM5	LVR-IC	LDO, 4.5V±1%, 80mA, +CE	SOT-23-5	28cx	VR4	6g	Mcr
LK45	fb	MIC5203-4.5YM5	LVR-IC	LDO, 4.5V±1%, 80mA, +CE, Pb. Free	SOT-23-5	28cx	VR4	6g	Mcr
LK47	-	MIC5203-4.7BM5	LVR-IC	LDO, 4.7V±1%, 80mA, +CE	SOT-23-5	28cx	VR4	6g	Mcr
LK47	fb	MIC5203-4.7YM5	LVR-IC	LDO, 4.7V±1%, 80mA, +CE, Pb. Free	SOT-23-5	28cx	VR4	6g	Mcr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LK5	-	XC9236C25DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LK50	-	MIC5203-5.0BM5	LVR-IC	LDO, 5.0V±1%, 80mA, +CE	SOT-23-5	28cx	VR4	6g	Mcr
LK50	fb	MIC5203-5.0YM5	LVR-IC	LDO, 5.0V±1%, 80mA, +CE, Pb. Free	SOT-23-5	28cx	VR4	6g	Mcr
LK6	-	XC9236C26DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LK7	-	XC9236C27DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LK8	-	XC6219D09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LK8	-	XC9236C28DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LK9	-	XC6219D10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LK9	-	XC9236C29DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LKA	-	XC6219D11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKA	-	XC9236C2ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LKAB	-	LP5951MF-1.5	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Nsc
LKB	-	XC6219D12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKB	-	XC9236C2BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LKBB	-	LP5951MF-1.8	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Nsc
LKC	-	XC6219D13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKC	-	XC9236C2CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LKCB	-	LP5951MF-2.0	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Nsc
LKD	-	XC6219D14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKD	-	XC9236C2DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LKE	-	XC6219D15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKE	-	XC9236C2EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LKEB	-	LP5951MF-2.5	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Nsc
LKF	-	XC6219D16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKF	-	XC9236C2FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LKFB	-	LP5951MF-2.8	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Nsc
LKGB	-	LP5951MF-3.0	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Nsc
LKH	-	XC6219D17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKH	-	XC9236C2HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LKHB	-	LP5951MF-3.3	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Nsc
LKK	-	XC6219D18AMR	LVR-IC	LDO, 1.85V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKK	-	XC9236C2KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LKL	-	XC6219D19AMR	LVR-IC	LDO, 1.95V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKL	-	XC9236C2LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LKM	-	XC6219D20AMR	LVR-IC	LDO, 2.05V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKM	-	XC9236C2MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LKN	-	XC6219D21AMR	LVR-IC	LDO, 2.15V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKP	-	XC6219D22AMR	LVR-IC	LDO, 2.25V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKR	-	XC6219D23AMR	LVR-IC	LDO, 2.35V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKRB	-	LP5951MF-1.3	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Nsc
LKS	-	XC6219D24AMR	LVR-IC	LDO, 2.45V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKT	-	XC6219D25AMR	LVR-IC	LDO, 2.55V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKTA	-	LP2985AIM5-5.7	LVR-IC	Ultra-LDO, 5.7V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LKTB	-	LP2985IM5-5.7	LVR-IC	Ultra-LDO, 5.7V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Nsc
LKU	-	XC6219D26AMR	LVR-IC	LDO, 2.65V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKV	-	XC6219D27AMR	LVR-IC	LDO, 2.75V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKX	-	XC6219D28AMR	LVR-IC	LDO, 2.85V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKY	-	XC6219D29AMR	LVR-IC	LDO, 2.95V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LKZ	-	XC6219D30AMR	LVR-IC	LDO, 3.05V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LL	-	2SC4207-BL	Si-npn	Dual, AF, 60V, 150mA, 300mW, B=350..700, >80MHz	SOT-25	28	T11	6a	Tos
LL	-	BU21UB3WG	LVR-IC	LDO, 2.1V±1%, 360mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
LL	-	R1122N201A	LVR-IC	LDO, Low noise, 2V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
LL	-	RT9168-35CBR	LVR-IC	LDO, 3.5V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
LL0	-	XC6219A31AMR	LVR-IC	LDO, 3.15V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LL0	-	XC9236C30DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LL1	-	XC6219A32AMR	LVR-IC	LDO, 3.25V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LL1	-	XC9236C31DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LL2	-	XC6219A33AMR	LVR-IC	LDO, 3.35V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LL2	-	XC9236C32DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LL3	-	XC6219A34AMR	LVR-IC	LDO, 3.45V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LL3	-	XC9236C33DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LL4	-	XC6219A35AMR	LVR-IC	LDO, 3.55V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LL4	-	XC9236C34DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LL5	-	XC6219A36AMR	LVR-IC	LDO, 3.65V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LL5	-	XC9236C35DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LL6	-	XC6219A37AMR	LVR-IC	LDO, 3.75V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LL6	-	XC9236C36DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LL7	-	XC6219A38AMR	LVR-IC	LDO, 3.85V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LL7	-	XC9236C37DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LL8	-	XC6219A39AMR	LVR-IC	LDO, 3.95V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LL8	-	XC9236C38DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LL9	-	XC6219A40AMR	LVR-IC	LDO, 4.05V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LL9	-	XC9236C39DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LLA	-	XC6219A41AMR	LVR-IC	LDO, 4.15V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LLA	-	XC9236C3ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LLB	-	XC6219A42AMR	LVR-IC	LDO, 4.25V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LLB	-	XC9236C3BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LLC	-	XC6219A43AMR	LVR-IC	LDO, 4.35V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LLC	-	XC9236C3CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LLD	-	XC6219A44AMR	LVR-IC	LDO, 4.45V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LLD	-	XC9236C3DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LLE	-	XC6219A45AMR	LVR-IC	LDO, 4.55V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LLE	-	XC9236C3EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LLF	-	XC6219A46AMR	LVR-IC	LDO, 4.65V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LLF	-	XC9236C3FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LLH	-	XC6219A47AMR	LVR-IC	LDO, 4.75V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LLH	-	XC9236C3HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LLK	-	XC6219A48AMR	LVR-IC	LDO, 4.85V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LLK	-	XC9236C3KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LLL	-	XC6219A49AMR	LVR-IC	LDO, 4.95V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LLL	-	XC9236C3LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LLM	-	XC9236C3MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
Lm	-	AX6603-410B	LVR-IC	LDO, 4.1V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LM	-	AX6603-220B	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LM	-	BU23UB3WG	LVR-IC	LDO, 2.3V±1%, 360mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
LM	-	IDT74LVC1G125ADY	CMOS-Log	Bus buffer gate with 3-state output	SO5-1	28	Log14	6g	Idt
LM	-	R1122N211A	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
LM	-	RT9168-36CBR	LVR-IC	LDO, 3.6V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
LM0	-	XC6219B31AMR	LVR-IC	LDO, 3.15V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LM0	-	XC9236C40DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
LM1	-	XC6219B32AMR	LVR-IC	LDO, 3.25V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LM2	-	XC6219B33AMR	LVR-IC	LDO, 3.35V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LM3	-	XC6219B34AMR	LVR-IC	LDO, 3.45V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LM4	-	XC6219B35AMR	LVR-IC	LDO, 3.55V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LM5	-	XC6219B36AMR	LVR-IC	LDO, 3.65V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LM6	-	XC6219B37AMR	LVR-IC	LDO, 3.75V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LM7	-	XC6219B38AMR	LVR-IC	LDO, 3.85V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LM8	-	XC6219B39AMR	LVR-IC	LDO, 3.95V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LM9	-	XC6219B40AMR	LVR-IC	LDO, 4.05V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LMA	-	XC6219B41AMR	LVR-IC	LDO, 4.15V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LMB	-	XC6219B42AMR	LVR-IC	LDO, 4.25V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LMC	-	XC6219B43AMR	LVR-IC	LDO, 4.35V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LMD	-	XC6219B44AMR	LVR-IC	LDO, 4.45V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LME	-	XC6219B45AMR	LVR-IC	LDO, 4.55V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LMF	-	XC6219B46AMR	LVR-IC	LDO, 4.65V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LMH	-	XC6219B47AMR	LVR-IC	LDO, 4.75V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LMK	-	XC6219B48AMR	LVR-IC	LDO, 4.85V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LML	-	XC6219B49AMR	LVR-IC	LDO, 4.95V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
Ln	-	AX6603-420B	LVR-IC	LDO, 4.2V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LN	-	AX6603-230B	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LN	-	BU25UB3WG	LVR-IC	LDO, 2.5V±1%, 360mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
LN	-	IDT74LVC1G126ADY	CMOS-Log	Bus buffer gate with 3-state output	SO5-1	28	Log13	6g	Idt
LN	-	R1122N221A	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
LN	-	RT9168-37CBR	LVR-IC	LDO, 3.7V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
LN0	-	XC6219C31AMR	LVR-IC	LDO, 3.15V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LN1	-	XC6219C32AMR	LVR-IC	LDO, 3.25V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LN2	-	XC6219C33AMR	LVR-IC	LDO, 3.35V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LN3	-	XC6219C34AMR	LVR-IC	LDO, 3.45V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LN4	-	XC6219C35AMR	LVR-IC	LDO, 3.55V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LN5	-	XC6219C36AMR	LVR-IC	LDO, 3.65V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LN6	-	XC6219C37AMR	LVR-IC	LDO, 3.75V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LN7	-	XC6219C38AMR	LVR-IC	LDO, 3.85V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LN8	-	XC6219C39AMR	LVR-IC	LDO, 3.95V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LN8	-	XC9236D08CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LN9	-	XC6219C40AMR	LVR-IC	LDO, 4.05V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LN9	-	XC9236D09CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LNA	-	XC6219C41AMR	LVR-IC	LDO, 4.15V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LNB	-	XC6219C42AMR	LVR-IC	LDO, 4.25V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LNC	-	XC6219C43AMR	LVR-IC	LDO, 4.35V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LND	-	XC6219C44AMR	LVR-IC	LDO, 4.45V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LNE	-	XC6219C45AMR	LVR-IC	LDO, 4.55V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LNF	-	XC6219C46AMR	LVR-IC	LDO, 4.65V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LNH	-	XC6219C47AMR	LVR-IC	LDO, 4.75V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LNK	-	XC6219C48AMR	LVR-IC	LDO, 4.85V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LNL	-	XC6219C49AMR	LVR-IC	LDO, 4.95V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LNL	-	XC9236D0LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LNM	-	XC9236D0MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LP	-	AX6603-240B	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LP	-	BU26UB3WG	LVR-IC	LDO, 2.6V±1%, 360mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
LP	-	R1122N231A	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
LP0	-	XC6219D31AMR	LVR-IC	LDO, 3.15V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LP0	-	XC9236D10CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LP1	-	XC6219D32AMR	LVR-IC	LDO, 3.25V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LP1	-	XC9236D11CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LP2	-	XC6219D33AMR	LVR-IC	LDO, 3.35V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LP2	-	XC9236D12CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LP3	-	XC6219D34AMR	LVR-IC	LDO, 3.45V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LP3	-	XC9236D13CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LP4	-	XC6219D35AMR	LVR-IC	LDO, 3.55V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LP4	-	XC9236D14CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LP5	-	XC6219D36AMR	LVR-IC	LDO, 3.65V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LP5	-	XC9236D15CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LP6	-	XC6219D37AMR	LVR-IC	LDO, 3.75V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LP6	-	XC9236D16CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LP7	-	XC6219D38AMR	LVR-IC	LDO, 3.85V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LP7	-	XC9236D17CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LP8	-	XC6219D39AMR	LVR-IC	LDO, 3.95V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LP8	-	XC9236D18CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LP9	-	XC6219D40AMR	LVR-IC	LDO, 4.05V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LP9	-	XC9236D19CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LPA	-	XC6219D41AMR	LVR-IC	LDO, 4.15V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LPA	-	XC9236D1ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LPB	-	XC6219D42AMR	LVR-IC	LDO, 4.25V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LPB	-	XC9236D1BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LPC	-	XC6219D43AMR	LVR-IC	LDO, 4.35V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LPC	-	XC9236D1CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LPD	-	XC6219D44AMR	LVR-IC	LDO, 4.45V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LPD	-	XC9236D1DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LPE	-	XC6219D45AMR	LVR-IC	LDO, 4.55V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LPE	-	XC9236D1ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LPF	-	LP2985-3.3DB	LVR-IC	Ultra-LDO, 3.2V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Ti
LPF	-	XC6219D46AMR	LVR-IC	LDO, 4.65V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LPF	-	XC9236D1FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LPG	-	LP2985-2.8DB	LVR-IC	Ultra-LDO, 2.8V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Ti
LPH	-	LP2985-1.8DB	LVR-IC	Ultra-LDO, 1.8V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Ti
LPH	-	XC6219D47AMR	LVR-IC	LDO, 4.75V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LPH	-	XC9236D1HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LPJ	-	LP2985A-2.8DB	LVR-IC	Ultra-LDO, 2.8V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Ti
LPK	-	LP2985A-3.3DB	LVR-IC	Ultra-LDO, 3.2V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Ti
LPK	-	XC6219D48AMR	LVR-IC	LDO, 4.85V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LPK	-	XC9236D1KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LPL	-	LP2985-2.5DB	LVR-IC	Ultra-LDO, 2.5V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Ti
LPL	-	XC6219D49AMR	LVR-IC	LDO, 4.95V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LPL	-	XC9236D1LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LPM	-	LP2985-2.9DB	LVR-IC	Ultra-LDO, 2.9V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Ti
LPM	-	XC9236D1MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LPN	-	LP2985-3.0DB	LVR-IC	Ultra-LDO, 3.0V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Ti
LPS	-	LP2985-5.0DB	LVR-IC	Ultra-LDO, 5.0V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Ti
LPT	-	LP2985A-1.8DB	LVR-IC	Ultra-LDO, 1.8V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Ti
LPU	-	LP2985A-2.5DB	LVR-IC	Ultra-LDO, 2.5V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Ti
LPZ	-	LP2985A-2.9DB	LVR-IC	Ultra-LDO, 2.9V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Ti
Lq	-	AX6603-430B	LVR-IC	LDO, 4.3V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LQ	-	AX6603-250B	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LQ	-	R1122N241A	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
Lr	-	AX6603-440B	LVR-IC	LDO, 4.4V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
Lr	-	BD52E23G-M	Vdet-IC	2.3V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
LR	-	AX6603-260B	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LR	-	IDT74LVC1G79ADY	CMOS-Log	Positive edge-triggered D-type flip-flop	SO5-1	28	Log20	6g	Idt
LR	-	R1122N251A	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
LR0	-	XC9236D20CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LR1	-	XC9236D21CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LR2	-	XC9236D22CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LR3	-	XC9236D23CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LR4	-	XC9236D24CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LR5	-	XC9236D25CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LR6	-	XC9236D26CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LR7	-	XC9236D27CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LR8	-	XC9236D28CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LR9	-	XC9236D29CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LRA	-	LP2985A-3.0DB	LVR-IC	Ultra-LDO, 3.0V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Ti
LRA	-	XC9236D2ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LRB	-	XC9236D2BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LRC	-	LP2985-10DB	LVR-IC	Ultra-LDO, 10.0V±1.5%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Ti
LRC	-	XC9236D2CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LRD	-	LP2985A-10DB	LVR-IC	Ultra-LDO, 10.0V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Ti
LRD	-	XC9236D2DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LRE	-	XC9236D2ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LRF	-	XC9236D2FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LRH	-	XC9236D2HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LRI	-	LP2985A-5.0DB	LVR-IC	Ultra-LDO, 5.0V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Ti
LRK	-	XC9236D2KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LRL	-	XC9236D2LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LRM	-	XC9236D2MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
Ls	-	AX6603-450B	LVR-IC	LDO, 4.5V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LS	-	AX6603-270B	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LS	-	R1122N261A	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
LS0	-	XC9236D30CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LS1	-	XC9236D31CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LS2	-	XC9236D32CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LS25	-	MIC5245-2.5BM5	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LS27	-	MIC5245-2.7BM5	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LS2J	-	MIC5245-2.85BM5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LS3	-	XC9236D33CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LS30	-	MIC5245-3.0BM5	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LS31	-	MIC5245-3.1BM5	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LS32	-	MIC5245-3.2BM5	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LS33	-	MIC5245-3.3BM5	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LS4	-	XC9236D34CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LS5	-	XC9236D35CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LS6	-	XC9236D36CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LS7	-	XC9236D37CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LS8	-	XC9236D38CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LS9	-	XC9236D39CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LSA	-	XC9236D3ACMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LSB	-	XC9236D3BCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LSC	-	XC9236D3CCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LSD	-	XC9236D3DCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LSE	-	XC9236D3ECMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LSF	-	XC9236D3FCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LSH	-	XC9236D3HCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LSK	-	XC9236D3KCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LSL	-	XC9236D3LCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LSM	-	XC9236D3MCMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LST	-	NCP500SN25T1	LVR-IC	LDO, LN, +CE, 2.5V±2.5%, 150mA	SOT-353	30cx	VR4	6b	Ons
Lt	-	AX6603-460B	LVR-IC	LDO, 4.6V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LT	-	AX6603-280B	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LT	-	IDT74LVC1G06ADY	CMOS-Log	Inverter (ODO)	SO5-1	28	Log19	6g	Idt
LT	-	R1122N271A	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
LT-	-	RT9168-42PBR	LVR-IC	LDO, 4.2V±2%, 200mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
LT0	-	XC9236D40CMR-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LT26	-	MIC5246-2.6BM5	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, Error	SOT-23-5	28w	VR8	6g	Mcr
LT27	-	MIC5246-2.7BM5	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, Error	SOT-23-5	28w	VR8	6g	Mcr
LT28	-	MIC5246-2.8BM5	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, Error	SOT-23-5	28w	VR8	6g	Mcr
LT2J	-	MIC5246-2.85BM5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, Error	SOT-23-5	28w	VR8	6g	Mcr
LT30	-	MIC5246-3.0BM5	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, Error	SOT-23-5	28w	VR8	6g	Mcr
LT33	-	MIC5246-3.3BM5	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, Error	SOT-23-5	28w	VR8	6g	Mcr
LTGC	-	LT1761ES5-BYP	LVR-IC	LDO, Lo-Power, Adjustable 1.22..20V±2%, 100mA	SOT-23-5	28wd	-	6a	Ltc
LTGD	-	LT1761ES5-2.5	LVR-IC	LDO, Lo-Power, 2.5V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6a	Ltc
LTGE	-	LT1761ES5-3	LVR-IC	LDO, Lo-Power, 3V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6a	Ltc
LTGF	-	LT1761ES5-3.3	LVR-IC	LDO, Lo-Power, 3.3V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6a	Ltc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LTGG	-	LT1761ES5-5	LVR-IC	LDO, Lo-Power, 5V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6a	Ltc
LTGH	-	LT1761ES5-SD	LVR-IC	LDO, Lo-Power, Adjustable 1.22..20V±2%, 100mA, +CE	SOT-23-5	28sg	VR16	6a	Ltc
LTJE	-	LT1761ES5-2	LVR-IC	LDO, Lo-Power, 2V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6a	Ltc
LTJM	-	LT1761ES5-1.8	LVR-IC	LDO, Lo-Power, 1.8V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6a	Ltc
LTKB	-	LT1761ES5-2.8	LVR-IC	LDO, Lo-Power, 2.8V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6a	Ltc
LTMT	-	LT1761ES5-1.5	LVR-IC	LDO, Lo-Power, 1.5V±2%, 100mA, +CE	SOT-23-5	28vrx	VR7	6a	Ltc
Lu	-	AX6603-470B	LVR-IC	LDO, 4.7V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LU	-	AX6603-285B	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LU	-	R1122N281A	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
LU15	-	MIC5247-1.5BM5	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LU15	fb	MIC5247-1.5BM5	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LU16	-	MIC5247-1.6BM5	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LU16	fb	MIC5247-1.6BM5	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LU18	-	MIC5247-1.8BM5	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LU18	fb	MIC5247-1.8BM5	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LU1J	-	MIC5247-1.85BM5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LU1J	fb	MIC5247-1.85BM5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LU20	-	MIC5247-2.0BM5	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LU20	fb	MIC5247-2.0BM5	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LU21	-	MIC5247-2.1BM5	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LU21	fb	MIC5247-2.1BM5	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LU22	-	MIC5247-2.2BM5	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LU22	fb	MIC5247-2.2BM5	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LU24	-	MIC5247-2.4BM5	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LU24	fb	MIC5247-2.4BM5	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
LU8	-	XC9236D08DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LU9	-	XC9236D09DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LUL	-	XC9236D0LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LUM	-	XC9236D0MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
Lv	-	AX6603-475B	LVR-IC	LDO, 4.75V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LV	-	1SV265	PIN-diode	Dual, VHF/UHF, 50V, 50mA, 100mW, 0.23pF, 2.5Ω(100MHz)	CP5	28bg	-	6a	San
LV	-	AX6603-290B	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LV	-	IDT74LVC1G07ADY	CMOS-Log	Noninverting buffer/driver (ODO)	SO5-1	28	Log8	6g	Idt
LV	-	R1122N291A	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
LV0	-	XC9236D10DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LV1	-	XC9236D11DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LV2	-	XC9236D12DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LV3	-	XC9236D13DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LV4	-	XC9236D14DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LV5	-	XC9236D15DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LV6	-	XC9236D16DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LV7	-	XC9236D17DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LV8	-	XC6219A092MR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LV8	-	XC9236D18DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LV9	-	XC6219A102MR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LV9	-	XC9236D19DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LVA	-	XC6219A112MR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVA	-	XC9236D1ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LVB	-	XC6219A122MR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVB	-	XC9236D1BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LVC	-	XC6219A132MR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVC	-	XC9236D1CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LVD	-	XC6219A142MR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVD	-	XC9236D1DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LVE	-	XC6219A152MR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVE	-	XC9236D1EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LVF	-	XC6219A162MR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVF	-	XC9236D1FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LVH	-	XC6219A172MR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVH	-	XC9236D1HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LVK	-	XC6219A182MR	LVR-IC	LDO, 1.8V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVK	-	XC9236D1KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LVL	-	XC6219A192MR	LVR-IC	LDO, 1.9V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVL	-	XC9236D1LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LVM	-	XC6219A202MR	LVR-IC	LDO, 2.0V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVM	-	XC9236D1MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LVN	-	XC6219A212MR	LVR-IC	LDO, 2.1V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVP	-	XC6219A222MR	LVR-IC	LDO, 2.2V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVR	-	XC6219A232MR	LVR-IC	LDO, 2.3V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVS	-	XC6219A242MR	LVR-IC	LDO, 2.4V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LVT	-	XC6219A252MR	LVR-IC	LDO, 2.5V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVU	-	XC6219A262MR	LVR-IC	LDO, 2.6V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVV	-	XC6219A272MR	LVR-IC	LDO, 2.7V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVX	-	XC6219A282MR	LVR-IC	LDO, 2.8V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVY	-	XC6219A292MR	LVR-IC	LDO, 2.9V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
LVZ	-	XC6219A302MR	LVR-IC	LDO, 3.0V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
Lw	-	AX6603-480B	LVR-IC	LDO, 4.8V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LW	-	AX6603-300B	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LW25	-	MIC5255-2.5BM5	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LW26	-	MIC5255-2.6BM5	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LW27	-	MIC5255-2.7BM5	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LW28	-	MIC5255-2.8BM5	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LW29	-	MIC5255-2.9BM5	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LW2H	-	MIC5255-2.75BM5	LVR-IC	LDO, 2.75V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LW2J	-	MIC5255-2.85BM5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LW30	-	MIC5255-3.0BM5	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LW31	-	MIC5255-3.1BM5	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LW32	-	MIC5255-3.2BM5	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LW33	-	MIC5255-3.3BM5	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
LW35	-	MIC5255-3.5BM5	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcr
Lx	-	AX6603-490B	LVR-IC	LDO, 4.9V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LX	-	AX6603-310B	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LX0	-	XC9236D20DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LX1	-	XC9236D21DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LX2	-	XC9236D22DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LX3	-	XC9236D23DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LX4	-	XC9236D24DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LX5	-	XC9236D25DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LX6	-	XC9236D26DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LX7	-	XC9236D27DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LX8	-	XC6219B092MR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LX8	-	XC9236D28DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LX9	-	XC6219B102MR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LX9	-	XC9236D29DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LXA	-	XC6219B112MR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXA	-	XC9236D2ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LXB	-	XC6219B122MR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXB	-	XC9236D2BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LXC	-	XC6219B132MR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXC	-	XC9236D2CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LXD	-	XC6219B142MR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXD	-	XC9236D2DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LXE	-	XC6219B152MR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXE	-	XC9236D2EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LXF	-	XC6219B162MR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXF	-	XC9236D2FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LXH	-	XC6219B172MR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXH	-	XC9236D2HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LXK	-	XC6219B182MR	LVR-IC	LDO, 1.8V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXK	-	XC9236D2KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LXL	-	XC6219B192MR	LVR-IC	LDO, 1.9V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXL	-	XC9236D2LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LXM	-	XC6219B202MR	LVR-IC	LDO, 2.0V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXM	-	XC9236D2MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LXN	-	XC6219B212MR	LVR-IC	LDO, 2.1V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXP	-	XC6219B222MR	LVR-IC	LDO, 2.2V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXR	-	XC6219B232MR	LVR-IC	LDO, 2.3V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXS	-	XC6219B242MR	LVR-IC	LDO, 2.4V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXT	-	XC6219B252MR	LVR-IC	LDO, 2.5V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXU	-	XC6219B262MR	LVR-IC	LDO, 2.6V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXV	-	XC6219B272MR	LVR-IC	LDO, 2.7V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXX	-	XC6219B282MR	LVR-IC	LDO, 2.8V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXY	-	XC6219B292MR	LVR-IC	LDO, 2.9V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
LXZ	-	XC6219B302MR	LVR-IC	LDO, 3.0V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Tor
Ly	-	AX6603-500B	LVR-IC	LDO, 5.0V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
Ly	-	BD52E24G-M	Vdet-IC	2.4V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
LY	-	2SC4207-Y	Si-npn	Dual, AF, 60V, 150mA, 300mW, B=120..240, >80MHz	SOT-25	28	T11	6a	Tos
LY	-	2SC4944-Y	Si-npn	Dual, AF, 60V, 150mA, 200mW, B=120..240, >80MHz	SOT-25	28	T11	6a	Tos
LY	-	AX6603-315B	LVR-IC	LDO, 3.15V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LY	-	IDT74LVC1G132ADY	CMOS-Log	2-input NAND Schmitt-trigger	SO5-1	28	Log12	6g	Idt

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LY0	-	XC9236D30DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LY1	-	XC9236D31DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LY2	-	XC9236D32DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LY3	-	XC9236D33DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LY4	-	XC9236D34DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LY5	-	XC9236D35DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LY6	-	XC9236D36DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LY7	-	XC9236D37DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LY8	-	XC6219C092MR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LY8	-	XC9236D38DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LY9	-	XC6219C102MR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LY9	-	XC9236D39DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LYA	-	XC6219C112MR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYA	-	XC9236D3ADMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LYB	-	XC6219C122MR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYB	-	XC9236D3BDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LYC	-	XC6219C132MR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYC	-	XC9236D3CDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LYD	-	XC6219C142MR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYD	-	XC9236D3DDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LYE	-	XC6219C152MR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYE	-	XC9236D3EDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LYF	-	XC6219C162MR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYF	-	XC9236D3FDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LYH	-	XC6219C172MR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYH	-	XC9236D3HDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LYK	-	XC6219C182MR	LVR-IC	LDO, 1.8V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYK	-	XC9236D3KDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LYL	-	XC6219C192MR	LVR-IC	LDO, 1.9V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYL	-	XC9236D3LDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LYM	-	XC6219C202MR	LVR-IC	LDO, 2.0V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYM	-	XC9236D3MDMR-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LYN	-	XC6219C212MR	LVR-IC	LDO, 2.1V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYP	-	XC6219C222MR	LVR-IC	LDO, 2.2V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYR	-	XC6219C232MR	LVR-IC	LDO, 2.3V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYS	-	XC6219C242MR	LVR-IC	LDO, 2.4V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYT	-	XC6219C252MR	LVR-IC	LDO, 2.5V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYU	-	XC6219C262MR	LVR-IC	LDO, 2.6V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYV	-	XC6219C272MR	LVR-IC	LDO, 2.7V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYX	-	XC6219C282MR	LVR-IC	LDO, 2.8V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYY	-	XC6219C292MR	LVR-IC	LDO, 2.9V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LYZ	-	XC6219C302MR	LVR-IC	LDO, 3.0V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Tor
LZ	-	AX6603-320B	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
LZ0	-	XC9236D40DMR-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
LZ8	-	XC6219D092MR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZ9	-	XC6219D102MR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZA	-	XC6219D112MR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZB	-	XC6219D122MR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZC	-	XC6219D132MR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZD	-	XC6219D142MR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZE	-	XC6219D152MR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZF	-	XC6219D162MR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZH	-	XC6219D172MR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZK	-	XC6219D182MR	LVR-IC	LDO, 1.8V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZL	-	XC6219D192MR	LVR-IC	LDO, 1.9V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZM	-	XC6219D202MR	LVR-IC	LDO, 2.0V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZN	-	XC6219D212MR	LVR-IC	LDO, 2.1V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZP	-	XC6219D222MR	LVR-IC	LDO, 2.2V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZR	-	XC6219D232MR	LVR-IC	LDO, 2.3V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZS	-	XC6219D242MR	LVR-IC	LDO, 2.4V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZT	-	XC6219D252MR	LVR-IC	LDO, 2.5V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZU	-	XC6219D262MR	LVR-IC	LDO, 2.6V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZV	-	XC6219D272MR	LVR-IC	LDO, 2.7V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZX	-	XC6219D282MR	LVR-IC	LDO, 2.8V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZY	-	XC6219D292MR	LVR-IC	LDO, 2.9V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
LZZ	-	XC6219D302MR	LVR-IC	LDO, 3.0V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Tor
M0	-	BL8554CA5TR10	LVR-IC	LDO, 1.0V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M0	-	BL8554CB5ATR10	LVR-IC	LDO, 1.0V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M0	-	BL8554CB5BTR10	LVR-IC	LDO, 1.0V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M0	-	R1121N301A	LVR-IC	LDO, Low noise, 3V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M0	-	RN5RG50AA	LVR-IC	Ext. transistor, 5V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
M0	-	RT9168A-15CBR	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
M0	ea	RN5RY401A	DC-DC-IC	VFM step-up, 4V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
M0	eu	BL8554CA5TR20	LVR-IC	LDO, 2.0V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M0	eu	BL8554CB5ATR20	LVR-IC	LDO, 2.0V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M0	eu	BL8554CB5BTR20	LVR-IC	LDO, 2.0V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M0	fg	BL8554CA5TR30	LVR-IC	LDO, 3.0V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M0	fg	BL8554CB5ATR30	LVR-IC	LDO, 3.0V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M0	fg	BL8554CB5BTR30	LVR-IC	LDO, 3.0V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M0	fh	BL8554CA5TR40	LVR-IC	LDO, 4.0V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M0	fh	BL8554CB5ATR40	LVR-IC	LDO, 4.0V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M0	fh	BL8554CB5BTR40	LVR-IC	LDO, 4.0V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M001	-	R3134Q10EC	Vdet-IC	1.0V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M002	-	R3134Q11EC	Vdet-IC	1.1V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M003	-	R3134Q12EC	Vdet-IC	1.2V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M004	-	R3134Q13EC	Vdet-IC	1.3V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M005	-	R3134Q14EC	Vdet-IC	1.4V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M006	-	R3134Q15EC	Vdet-IC	1.5V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M007	-	R3134Q16EC	Vdet-IC	1.6V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M008	-	R3134Q17EC	Vdet-IC	1.7V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M009	-	R3134Q18EC	Vdet-IC	1.8V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M010	-	R3134Q19EC	Vdet-IC	1.9V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M011	-	R3134Q20EC	Vdet-IC	2.0V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M012	-	R3134Q21EC	Vdet-IC	2.1V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M013	-	R3134Q22EC	Vdet-IC	2.2V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M014	-	R3134Q23EC	Vdet-IC	2.3V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M015	-	R3134Q24EC	Vdet-IC	2.4V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M016	-	R3134Q25EC	Vdet-IC	2.5V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M017	-	R3134Q26EC	Vdet-IC	2.6V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M018	-	R3134Q27EC	Vdet-IC	2.7V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M019	-	R3134Q28EC	Vdet-IC	2.8V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M020	-	R3134Q29EC	Vdet-IC	2.9V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M021	-	R3134Q30EC	Vdet-IC	3.0V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M022	-	R3134Q31EC	Vdet-IC	3.1V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M023	-	R3134Q32EC	Vdet-IC	3.2V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M024	-	R3134Q33EC	Vdet-IC	3.3V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M025	-	R3134Q34EC	Vdet-IC	3.4V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M026	-	R3134Q35EC	Vdet-IC	3.5V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M027	-	R3134Q36EC	Vdet-IC	3.6V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M028	-	R3134Q37EC	Vdet-IC	3.7V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M029	-	R3134Q38EC	Vdet-IC	3.8V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M03	-	TC53N2002ECT	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
M030	-	R3134Q39EC	Vdet-IC	3.9V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M031	-	R3134Q40EC	Vdet-IC	4.0V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M032	-	R3134Q41EC	Vdet-IC	4.1V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M033	-	R3134Q42EC	Vdet-IC	4.2V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M034	-	R3134Q43EC	Vdet-IC	4.3V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M035	-	R3134Q44EC	Vdet-IC	4.4V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M036	-	R3134Q45EC	Vdet-IC	4.5V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M037	-	R3134Q46EC	Vdet-IC	4.6V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M038	-	R3134Q47EC	Vdet-IC	4.7V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M039	-	R3134Q48EC	Vdet-IC	4.8V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M040	-	R3134Q49EC	Vdet-IC	4.9V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M041	-	R3134Q50EC	Vdet-IC	5.0V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M042	-	R3134Q23EC2	Vdet-IC	2.32V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M043	-	R3134Q26EC3	Vdet-IC	2.63V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M044	-	R3134Q29EC3	Vdet-IC	2.93V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M045	-	R3134Q30EC8	Vdet-IC	3.08V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M046	-	R3134Q43EC8	Vdet-IC	4.38V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M047	-	R3134Q46EC3	Vdet-IC	4.63V±1.8%, -Reset PPO, -MR	SC-88A	28z8	VD5	6ma	Ric
M08	-	RP504N081B	DC-DC-IC	PWM/VFM st-dwn, 0.8V±18mV, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M09	-	RP504N091B	DC-DC-IC	PWM/VFM st-dwn, 0.9V±18mV, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M0A	-	R3117N071A	Vdet-IC	0.7V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0A	-	XC6108N20AMR	Vdet-IC	2.0V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M0A	-	XC6118C10AMR-G	Vdet-IC	1.0V±30mV, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
M0B	-	R3117N081A	Vdet-IC	0.8V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0B	-	XC6108N20BMR	Vdet-IC	2.0V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M0B	-	XC6118C10BMR-G	Vdet-IC	1.0V±30mV, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
M0C	-	R3117N091A	Vdet-IC	0.9V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0C	-	XC6108N20CMR	Vdet-IC	2.0V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M0C	-	XC6118C10CMR-G	Vdet-IC	1.0V±30mV, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
M0D	-	R3117N101A	Vdet-IC	1.0V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0D	-	XC6108N20DMR	Vdet-IC	2.0V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M0D	-	XC6118C10DMR-G	Vdet-IC	1.0V±30mV, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
M0E	-	R3117N111A	Vdet-IC	1.1V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0F	-	R3117N121A	Vdet-IC	1.2V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0G	-	R3117N131A	Vdet-IC	1.3V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0H	-	R3117N141A	Vdet-IC	1.4V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0J	-	R3117N151A	Vdet-IC	1.5V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0K	-	R3117N161A	Vdet-IC	1.6V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0L	-	R3117N171A	Vdet-IC	1.7V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0M	-	R3117N181A	Vdet-IC	1.8V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0N	-	R3117N191A	Vdet-IC	1.9V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0P	-	R3117N201A	Vdet-IC	2.0V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0Q	-	R3117N211A	Vdet-IC	2.1V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0R	-	R3117N221A	Vdet-IC	2.2V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0S	-	R3117N231A	Vdet-IC	2.3V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0T	-	R3117N241A	Vdet-IC	2.4V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0U	-	R3117N251A	Vdet-IC	2.5V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0V	-	R3117N261A	Vdet-IC	2.6V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0W	-	R3117N271A	Vdet-IC	2.7V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0X	-	R3117N281A	Vdet-IC	2.8V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0Y	-	R3117N291A	Vdet-IC	2.9V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
M0Z	-	R3117N301A	Vdet-IC	3.0V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
m1	-	BD46E241G-M	Vdet-IC	2.4V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
M1	-	BL8554CA5TR11	LVR-IC	LDO, 1.1V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M1	-	BL8554CB5ATR11	LVR-IC	LDO, 1.1V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M1	-	BL8554CB5BTR11	LVR-IC	LDO, 1.1V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M1	-	R1121N311A	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
M1	-	RN5RG51AA	LVR-IC	Ext. transistor, 5.1V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
M1	-	RT9168A-16CBR	LVR-IC	LDO, 1.6V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
M1	ea	RN5RY411A	DC-DC-IC	VFM step-up, 4.1V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
M1	eu	BL8554CA5TR21	LVR-IC	LDO, 2.1V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M1	eu	BL8554CB5ATR21	LVR-IC	LDO, 2.1V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M1	eu	BL8554CB5BTR21	LVR-IC	LDO, 2.1V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M1	fg	BL8554CA5TR31	LVR-IC	LDO, 3.1V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M1	fg	BL8554CB5ATR31	LVR-IC	LDO, 3.1V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M1	fg	BL8554CB5BTR31	LVR-IC	LDO, 3.1V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M1	fh	BL8554CA5TR41	LVR-IC	LDO, 4.1V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M1	fh	BL8554CB5ATR41	LVR-IC	LDO, 4.1V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M1	fh	BL8554CB5BTR41	LVR-IC	LDO, 4.1V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M10	-	R1224N102M	DC-DC-IC	PWM step-down, 1V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
M10	-	RP504N101B	DC-DC-IC	PWM/VFM st-dwn, 1.0V±18mV, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M11	-	RP504N111B	DC-DC-IC	PWM/VFM st-dwn, 1.1V±18mV, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M12	-	R1224N122M	DC-DC-IC	PWM step-down, 1.2V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
M12	-	RP504N121B	DC-DC-IC	PWM/VFM st-dwn, 1.2V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M13	-	88N13-AF5	Vdet-IC	1.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M13	-	RP504N131B	DC-DC-IC	PWM/VFM st-dwn, 1.3V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M13	-	TC53N2102ECT	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
M13G	-	88N13G-AF5	Vdet-IC	1.3V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M13L	-	88N13L-AF5	Vdet-IC	1.3V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M14	-	88N14-AF5	Vdet-IC	1.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M14	-	RP504N141B	DC-DC-IC	PWM/VFM st-dwn, 1.4V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M14G	-	88N14G-AF5	Vdet-IC	1.4V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M14L	-	88N14L-AF5	Vdet-IC	1.4V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M15	-	88N15-AF5	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M15	-	R1224N152M	DC-DC-IC	PWM step-down, 1.5V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
M15	-	RP504N151B	DC-DC-IC	PWM/VFM st-dwn, 1.5V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M15	eb	XC6368C152MR	DC-DC-IC	PWM/PFM step-up, 1.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M15	ek	XC6366C152MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M15G	-	88N15G-AF5	Vdet-IC	1.5V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M15L	-	88N15L-AF5	Vdet-IC	1.5V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M16	-	88N16-AF5	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M16	-	RP504N161B	DC-DC-IC	PWM/VFM st-dwn, 1.6V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M16	eb	XC6368C162MR	DC-DC-IC	PWM/PFM step-up, 1.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M16	ek	XC6366C162MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M16G	-	88N16G-AF5	Vdet-IC	1.6V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M16L	-	88N16L-AF5	Vdet-IC	1.6V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M17	-	88N17-AF5	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M17	-	RP504N171B	DC-DC-IC	PWM/VFM st-dwn, 1.7V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M17	eb	XC6368C172MR	DC-DC-IC	PWM/PFM step-up, 1.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M17	ek	XC6366C172MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M17G	-	88N17G-AF5	Vdet-IC	1.7V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M17L	-	88N17L-AF5	Vdet-IC	1.7V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M18	-	88N18-AF5	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M18	-	R1224N182M	DC-DC-IC	PWM step-down, 1.8V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
M18	-	RP504N181B	DC-DC-IC	PWM/VFM st-dwn, 1.8V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M18	eb	XC6368C182MR	DC-DC-IC	PWM/PFM step-up, 1.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M18	ek	XC6366C182MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M18G	-	88N18G-AF5	Vdet-IC	1.8V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M18L	-	88N18L-AF5	Vdet-IC	1.8V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M19	-	88N19-AF5	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M19	-	RP504N191B	DC-DC-IC	PWM/VFM st-dwn, 1.9V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M19	eb	XC6368C192MR	DC-DC-IC	PWM/PFM step-up, 1.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M19	ek	XC6366C192MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M19G	-	88N19G-AF5	Vdet-IC	1.9V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M19L	-	88N19L-AF5	Vdet-IC	1.9V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M1A	-	R3117N071C	Vdet-IC	0.7V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1A	-	XC6108N21AMR	Vdet-IC	2.1V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M1A	-	XC6118C11AMR-G	Vdet-IC	1.1V±30mV, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
M1A	ek	TC105103ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.0V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M1B	-	R3117N081C	Vdet-IC	0.8V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1B	-	XC6108N21BMR	Vdet-IC	2.1V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M1B	-	XC6118C11BMR-G	Vdet-IC	1.1V±30mV, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
M1B	et	TC105113ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.1V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M1C	-	R3117N091C	Vdet-IC	0.9V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1C	-	XC6108N21CMR	Vdet-IC	2.1V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M1C	-	XC6118C11CMR-G	Vdet-IC	1.1V±30mV, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
M1C	et	TC105123ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.2V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M1D	-	R3117N101C	Vdet-IC	1.0V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1D	-	XC6108N21DMR	Vdet-IC	2.1V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M1D	-	XC6118C11DMR-G	Vdet-IC	1.1V±30mV, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
M1D	et	TC105133ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.3V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M1E	-	R3117N111C	Vdet-IC	1.1V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1E	et	TC105143ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.4V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M1F	-	R3117N121C	Vdet-IC	1.2V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1F	eb	XC6368C153MR	DC-DC-IC	PWM/PFM step-up, 1.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M1F	ek	XC6366C153MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M1F	et	TC105153ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.5V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M1G	-	R3117N131C	Vdet-IC	1.3V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1H	-	R3117N141C	Vdet-IC	1.4V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1H	eb	XC6368C163MR	DC-DC-IC	PWM/PFM step-up, 1.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M1H	ek	XC6366C163MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M1H	et	TC105163ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.6V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M1J	-	R3117N151C	Vdet-IC	1.5V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1K	-	R3117N161C	Vdet-IC	1.6V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1K	eb	XC6368C173MR	DC-DC-IC	PWM/PFM step-up, 1.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M1K	ek	XC6366C173MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M1K	et	TC105173ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.7V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M1L	-	R3117N171C	Vdet-IC	1.7V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1L	eb	XC6368C183MR	DC-DC-IC	PWM/PFM step-up, 1.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M1L	ek	XC6366C183MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M1L	et	TC105183ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.8V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M1M	-	R3117N181C	Vdet-IC	1.8V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1M	eb	XC6368C193MR	DC-DC-IC	PWM/PFM step-up, 1.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M1M	ek	XC6366C193MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M1M	et	TC105193ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 1.9V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M1N	-	R3117N191C	Vdet-IC	1.9V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1P	-	R3117N201C	Vdet-IC	2.0V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1Q	-	R3117N211C	Vdet-IC	2.1V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1R	-	R3117N221C	Vdet-IC	2.2V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1S	-	R3117N231C	Vdet-IC	2.3V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1T	-	R3117N241C	Vdet-IC	2.4V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1U	-	R3117N251C	Vdet-IC	2.5V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1V	-	R3117N261C	Vdet-IC	2.6V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1W	-	R3117N271C	Vdet-IC	2.7V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1X	-	R3117N281C	Vdet-IC	2.8V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1Y	-	R3117N291C	Vdet-IC	2.9V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
M1Z	-	R3117N301C	Vdet-IC	3.0V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
m2	-	BD46E251G-M	Vdet-IC	2.5V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M2	-	BL8554CA5TR12	LVR-IC	LDO, 1.2V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M2	-	BL8554CB5ATR12	LVR-IC	LDO, 1.2V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M2	-	BL8554CB5BTR12	LVR-IC	LDO, 1.2V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M2	-	BU18UB3WG	LVR-IC	LDO, 1.8V±1%, 360mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
M2	-	R1121N321A	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
M2	-	RN5RG52AA	LVR-IC	Ext. transistor, 5.2V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
M2	-	RT9168A-17CBR	LVR-IC	LDO, 1.7V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
M2	ea	RN5RY421A	DC-DC-IC	VFM step-up, 4.2V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
M2	eu	BL8554CA5TR22	LVR-IC	LDO, 2.2V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M2	eu	BL8554CB5ATR22	LVR-IC	LDO, 2.2V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M2	eu	BL8554CB5BTR22	LVR-IC	LDO, 2.2V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M2	fg	BL8554CA5TR32	LVR-IC	LDO, 3.2V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M2	fg	BL8554CB5ATR32	LVR-IC	LDO, 3.2V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M2	fg	BL8554CB5BTR32	LVR-IC	LDO, 3.2V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M2	fh	BL8554CA5TR42	LVR-IC	LDO, 4.2V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M2	fh	BL8554CB5ATR42	LVR-IC	LDO, 4.2V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M2	fh	BL8554CB5BTR42	LVR-IC	LDO, 4.2V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M20	-	88N20-AF5	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M20	-	RP504N201B	DC-DC-IC	PWM/VFM st-dwn, 2.0V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M20	eb	XC6368C202MR	DC-DC-IC	PWM/PFM step-up, 2.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M20	eh	XC6382D201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M20	ek	XC6366C202MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M20G	-	88N20G-AF5	Vdet-IC	2.0V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M20L	-	88N20L-AF5	Vdet-IC	2.0V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M21	-	88N21-AF5	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M21	-	RP504N211B	DC-DC-IC	PWM/VFM st-dwn, 2.1V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M21	eb	XC6368C212MR	DC-DC-IC	PWM/PFM step-up, 2.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M21	eh	XC6382D211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M21	ek	XC6366C212MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M21G	-	88N21G-AF5	Vdet-IC	2.1V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M21L	-	88N21L-AF5	Vdet-IC	2.1V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M22	-	88N22-AF5	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M22	-	RP504N221B	DC-DC-IC	PWM/VFM st-dwn, 2.2V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M22	eb	XC6368C222MR	DC-DC-IC	PWM/PFM step-up, 2.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M22	eh	XC6382D221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M22	ek	XC6366C222MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M22G	-	88N22G-AF5	Vdet-IC	2.2V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M22L	-	88N22L-AF5	Vdet-IC	2.2V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M23	-	88N23-AF5	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M23	-	RP504N231B	DC-DC-IC	PWM/VFM st-dwn, 2.3V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M23	-	TC53N2202ECT	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
M23	eb	XC6368C232MR	DC-DC-IC	PWM/PFM step-up, 2.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M23	eh	XC6382D231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M23	ek	XC6366C232MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M23G	-	88N23G-AF5	Vdet-IC	2.3V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M23L	-	88N23L-AF5	Vdet-IC	2.3V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M24	-	88N24-AF5	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M24	-	RP504N241B	DC-DC-IC	PWM/VFM st-dwn, 2.4V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M24	eb	XC6368C242MR	DC-DC-IC	PWM/PFM step-up, 2.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M24	eh	XC6382D241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M24	ek	XC6366C242MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M24G	-	88N24G-AF5	Vdet-IC	2.4V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M24L	-	88N24L-AF5	Vdet-IC	2.4V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M25	-	88N25-AF5	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M25	-	R1224N252M	DC-DC-IC	PWM step-down, 2.5V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
M25	-	RP504N251B	DC-DC-IC	PWM/VFM st-dwn, 2.5V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M25	eb	XC6368C252MR	DC-DC-IC	PWM/PFM step-up, 2.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M25	eh	XC6382D251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M25	ek	XC6366C252MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M25G	-	88N25G-AF5	Vdet-IC	2.5V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M25L	-	88N25L-AF5	Vdet-IC	2.5V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M26	-	88N26-AF5	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M26	-	RP504N261B	DC-DC-IC	PWM/VFM st-dwn, 2.6V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M26	eb	XC6368C262MR	DC-DC-IC	PWM/PFM step-up, 2.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M26	eh	XC6382D261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M26	ek	XC6366C262MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M26G	-	88N26G-AF5	Vdet-IC	2.6V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M26L	-	88N26L-AF5	Vdet-IC	2.6V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M27	-	88N27-AF5	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M27	-	RP504N271B	DC-DC-IC	PWM/VFM st-dwn, 2.7V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M27	eb	XC6368C272MR	DC-DC-IC	PWM/PFM step-up, 2.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M27	eh	XC6382D271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M27	ek	XC6366C272MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M27G	-	88N27G-AF5	Vdet-IC	2.7V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M27L	-	88N27L-AF5	Vdet-IC	2.7V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M28	-	88N28-AF5	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M28	-	RP504N281B	DC-DC-IC	PWM/VFM st-dwn, 2.8V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M28	eb	XC6368C282MR	DC-DC-IC	PWM/PFM step-up, 2.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M28	eh	XC6382D281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M28	ek	XC6366C282MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M28G	-	88N28G-AF5	Vdet-IC	2.8V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M28L	-	88N28L-AF5	Vdet-IC	2.8V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M29	-	88N29-AF5	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M29	-	RP504N291B	DC-DC-IC	PWM/VFM st-dwn, 2.9V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M29	eb	XC6368C292MR	DC-DC-IC	PWM/PFM step-up, 2.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M29	eh	XC6382D291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M29	ek	XC6366C292MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M29G	-	88N29G-AF5	Vdet-IC	2.9V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M29L	-	88N29L-AF5	Vdet-IC	2.9V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M2A	-	XC6108N22AMR	Vdet-IC	2.2V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M2A	-	XC6118C12AMR-G	Vdet-IC	1.2V±30mV, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
M2A	eb	XC6368C203MR	DC-DC-IC	PWM/PFM step-up, 2.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M2A	ek	XC6366C203MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M2A	et	TC105203ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.0V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M2B	-	XC6108N22BMR	Vdet-IC	2.2V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M2B	-	XC6118C12BMR-G	Vdet-IC	1.2V±30mV, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
M2B	eb	XC6368C213MR	DC-DC-IC	PWM/PFM step-up, 2.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M2B	ek	XC6366C213MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M2B	et	TC105213ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.1V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M2C	-	XC6108N22CMR	Vdet-IC	2.2V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M2C	-	XC6118C12CMR-G	Vdet-IC	1.2V±30mV, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
M2C	eb	XC6368C223MR	DC-DC-IC	PWM/PFM step-up, 2.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M2C	ek	XC6366C223MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M2C	et	TC105223ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.2V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M2D	-	XC6108N22DMR	Vdet-IC	2.2V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M2D	-	XC6118C12DMR-G	Vdet-IC	1.2V±30mV, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
M2D	eb	XC6368C233MR	DC-DC-IC	PWM/PFM step-up, 2.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M2D	ek	XC6366C233MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M2D	et	TC105233ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.3V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M2E	eb	XC6368C243MR	DC-DC-IC	PWM/PFM step-up, 2.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M2E	ek	XC6366C243MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M2E	et	TC105243ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.4V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M2F	eb	XC6368C253MR	DC-DC-IC	PWM/PFM step-up, 2.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M2F	ek	XC6366C253MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M2F	et	TC105253ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.5V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M2H	eb	XC6368C263MR	DC-DC-IC	PWM/PFM step-up, 2.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M2H	ek	XC6366C263MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M2H	et	TC105263ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.6V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M2K	eb	XC6368C273MR	DC-DC-IC	PWM/PFM step-up, 2.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M2K	ek	XC6366C273MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M2K	et	TC105273ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.7V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M2L	eb	XC6368C283MR	DC-DC-IC	PWM/PFM step-up, 2.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M2L	ek	XC6366C283MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M2L	et	TC105283ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.8V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M2M	eb	XC6368C293MR	DC-DC-IC	PWM/PFM step-up, 2.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M2M	ek	XC6366C293MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M2M	et	TC105293ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 2.9V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
m3	-	BD46E261G-M	Vdet-IC	2.6V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
M3	-	BL8554CA5TR13	LVR-IC	LDO, 1.3V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M3	-	BL8554CB5ATR13	LVR-IC	LDO, 1.3V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M3	-	BL8554CB5BTR13	LVR-IC	LDO, 1.3V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M3	-	NX3L1T384GW	CMOS-Log	Single-pole single-throw analog switch	SOT-353-1	28	Log86	6a	Nxp
M3	-	R1121N331A	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
M3	-	RN5RG53AA	LVR-IC	Ext. transistor, 5.3V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
M3	-	RT9168A-18CBR	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
M3	ea	RN5RY431A	DC-DC-IC	VFM step-up, 4.3V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
M3	eu	BL8554CA5TR23	LVR-IC	LDO, 2.3V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M3	eu	BL8554CB5ATR23	LVR-IC	LDO, 2.3V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M3	eu	BL8554CB5BTR23	LVR-IC	LDO, 2.3V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M3	fg	BL8554CA5TR33	LVR-IC	LDO, 3.3V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M3	fg	BL8554CB5ATR33	LVR-IC	LDO, 3.3V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M3	fg	BL8554CB5BTR33	LVR-IC	LDO, 3.3V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M3	fh	BL8554CA5TR43	LVR-IC	LDO, 4.3V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M3	fh	BL8554CB5ATR43	LVR-IC	LDO, 4.3V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M3	fh	BL8554CB5BTR43	LVR-IC	LDO, 4.3V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M30	-	88N30-AF5	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M30	-	R1224N302M	DC-DC-IC	PWM step-down, 3V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
M30	-	RP504N301B	DC-DC-IC	PWM/VFM st-dwn, 3.0V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M30	eb	XC6368C302MR	DC-DC-IC	PWM/PFM step-up, 3.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M30	eh	XC6382D301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M30	ek	XC6366C302MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M30G	-	88N30G-AF5	Vdet-IC	3.0V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M30L	-	88N30L-AF5	Vdet-IC	3.0V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M31	-	88N31-AF5	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M31	-	RP504N311B	DC-DC-IC	PWM/VFM st-dwn, 3.1V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M31	eb	XC6368C312MR	DC-DC-IC	PWM/PFM step-up, 3.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M31	eh	XC6382D311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M31	ek	XC6366C312MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M31G	-	88N31G-AF5	Vdet-IC	3.1V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M31L	-	88N31L-AF5	Vdet-IC	3.1V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M32	-	88N32-AF5	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M32	-	RP504N321B	DC-DC-IC	PWM/VFM st-dwn, 3.2V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M32	eb	XC6368C322MR	DC-DC-IC	PWM/PFM step-up, 3.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M32	eh	XC6382D321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M32	ek	XC6366C322MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M32G	-	88N32G-AF5	Vdet-IC	3.2V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M32L	-	88N32L-AF5	Vdet-IC	3.2V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M33	-	88N33-AF5	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M33	-	R1224N332M	DC-DC-IC	PWM step-down, 3.3V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
M33	-	RP504N331B	DC-DC-IC	PWM/VFM st-dwn, 3.3V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
M33	-	TC53N2302ECT	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
M33	eb	XC6368C332MR	DC-DC-IC	PWM/PFM step-up, 3.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M33	eh	XC6382D331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M33	ek	XC6366C332MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M33G	-	88N33G-AF5	Vdet-IC	3.3V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M33L	-	88N33L-AF5	Vdet-IC	3.3V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M34	-	88N34-AF5	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M34	eb	XC6368C342MR	DC-DC-IC	PWM/PFM step-up, 3.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M34	eh	XC6382D341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M34	ek	XC6366C342MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M34G	-	88N34G-AF5	Vdet-IC	3.4V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M34L	-	88N34L-AF5	Vdet-IC	3.4V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M35	-	88N35-AF5	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M35	eb	XC6368C352MR	DC-DC-IC	PWM/PFM step-up, 3.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M35	eh	XC6382D351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M35	ek	XC6366C352MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M35G	-	88N35G-AF5	Vdet-IC	3.5V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M35L	-	88N35L-AF5	Vdet-IC	3.5V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M36	-	88N36-AF5	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M36	eb	XC6368C362MR	DC-DC-IC	PWM/PFM step-up, 3.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M36	eh	XC6382D361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M36	ek	XC6366C362MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M36G	-	88N36G-AF5	Vdet-IC	3.6V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M36L	-	88N36L-AF5	Vdet-IC	3.6V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M37	-	88N37-AF5	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M37	eb	XC6368C372MR	DC-DC-IC	PWM/PFM step-up, 3.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M37	eh	XC6382D371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M37	ek	XC6366C372MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M37G	-	88N37G-AF5	Vdet-IC	3.7V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M37L	-	88N37L-AF5	Vdet-IC	3.7V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M38	-	88N38-AF5	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M38	eb	XC6368C382MR	DC-DC-IC	PWM/PFM step-up, 3.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M38	eh	XC6382D381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M38	ek	XC6366C382MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M38G	-	88N38G-AF5	Vdet-IC	3.8V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M38L	-	88N38L-AF5	Vdet-IC	3.8V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M39	-	88N39-AF5	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M39	eb	XC6368C392MR	DC-DC-IC	PWM/PFM step-up, 3.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M39	eh	XC6382D391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M39	ek	XC6366C392MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M39G	-	88N39G-AF5	Vdet-IC	3.9V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M39L	-	88N39L-AF5	Vdet-IC	3.9V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M3A	-	XC6108N23AMR	Vdet-IC	2.3V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M3A	-	XC6118C13AMR-G	Vdet-IC	1.3V±30mV, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
M3A	eb	XC6368C303MR	DC-DC-IC	PWM/PFM step-up, 3.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M3A	ek	XC6366C303MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M3A	et	TC105303ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.0V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M3B	-	XC6108N23BMR	Vdet-IC	2.3V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M3B	-	XC6118C13BMR-G	Vdet-IC	1.3V±30mV, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
M3B	eb	XC6368C313MR	DC-DC-IC	PWM/PFM step-up, 3.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M3B	ek	XC6366C313MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M3B	et	TC105313ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.1V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M3C	-	XC6108N23CMR	Vdet-IC	2.3V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M3C	-	XC6118C13CMR-G	Vdet-IC	1.3V±30mV, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
M3C	eb	XC6368C323MR	DC-DC-IC	PWM/PFM step-up, 3.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M3C	ek	XC6366C323MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M3C	et	TC105323ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.2V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M3D	-	XC6108N23DMR	Vdet-IC	2.3V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M3D	-	XC6118C13DMR-G	Vdet-IC	1.3V±30mV, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
M3D	eb	XC6368C333MR	DC-DC-IC	PWM/PFM step-up, 3.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M3D	ek	XC6366C333MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M3D	et	TC105333ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.3V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M3E	eb	XC6368C343MR	DC-DC-IC	PWM/PFM step-up, 3.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M3E	ek	XC6366C343MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M3E	et	TC105343ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.4V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M3F	eb	XC6368C353MR	DC-DC-IC	PWM/PFM step-up, 3.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M3F	ek	XC6366C353MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M3F	et	TC105353ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.5V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M3H	eb	XC6368C363MR	DC-DC-IC	PWM/PFM step-up, 3.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M3H	ek	XC6366C363MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M3H	et	TC105363ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.6V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M3K	eb	XC6368C373MR	DC-DC-IC	PWM/PFM step-up, 3.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M3K	ek	XC6366C373MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M3K	et	TC105373ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.7V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M3L	eb	XC6368C383MR	DC-DC-IC	PWM/PFM step-up, 3.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M3L	ek	XC6366C383MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M3L	et	TC105383ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.8V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M3M	eb	XC6368C393MR	DC-DC-IC	PWM/PFM step-up, 3.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M3M	ek	XC6366C393MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M3M	et	TC105393ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 3.9V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
m4	-	BD46E271G-M	Vdet-IC	2.7V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
M4	-	BL8554CA5TR14	LVR-IC	LDO, 1.4V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M4	-	BL8554CB5ATR14	LVR-IC	LDO, 1.4V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M4	-	BL8554CB5BTR14	LVR-IC	LDO, 1.4V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M4	-	R1121N341A	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
M4	-	RN5RG54AA	LVR-IC	Ext. transistor, 5.4V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
M4	-	RT9168A-19CBR	LVR-IC	LDO, 1.9V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
M4	ea	RN5RY441A	DC-DC-IC	VFM step-up, 4.4V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
M4	eu	BL8554CA5TR24	LVR-IC	LDO, 2.4V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M4	eu	BL8554CB5ATR24	LVR-IC	LDO, 2.4V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M4	eu	BL8554CB5BTR24	LVR-IC	LDO, 2.4V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M4	fg	BL8554CA5TR34	LVR-IC	LDO, 3.4V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M4	fg	BL8554CB5ATR34	LVR-IC	LDO, 3.4V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M4	fg	BL8554CB5BTR34	LVR-IC	LDO, 3.4V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M4	fh	BL8554CA5TR44	LVR-IC	LDO, 4.4V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M4	fh	BL8554CB5ATR44	LVR-IC	LDO, 4.4V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M4	fh	BL8554CB5BTR44	LVR-IC	LDO, 4.4V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M40	-	88N40-AF5	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M40	eb	XC6368C402MR	DC-DC-IC	PWM/PFM step-up, 4.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M40	eh	XC6382D401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M40	ek	XC6366C402MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M40G	-	88N40G-AF5	Vdet-IC	4.0V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M40L	-	88N40L-AF5	Vdet-IC	4.0V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M41	-	88N41-AF5	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M41	eb	XC6368C412MR	DC-DC-IC	PWM/PFM step-up, 4.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M41	eh	XC6382D411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M41	ek	XC6366C412MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M41G	-	88N41G-AF5	Vdet-IC	4.1V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M41L	-	88N41L-AF5	Vdet-IC	4.1V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M42	-	88N42-AF5	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M42	eb	XC6368C422MR	DC-DC-IC	PWM/PFM step-up, 4.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M42	eh	XC6382D421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M42	ek	XC6366C422MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M42G	-	88N42G-AF5	Vdet-IC	4.2V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M42L	-	88N42L-AF5	Vdet-IC	4.2V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M43	-	88N43-AF5	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M43	-	TC53N2402ECT	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
M43	eb	XC6368C432MR	DC-DC-IC	PWM/PFM step-up, 4.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M43	eh	XC6382D431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M43	ek	XC6366C432MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M43G	-	88N43G-AF5	Vdet-IC	4.3V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M43L	-	88N43L-AF5	Vdet-IC	4.3V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M44	-	88N44-AF5	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M44	eb	XC6368C442MR	DC-DC-IC	PWM/PFM step-up, 4.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M44	eh	XC6382D441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M44	ek	XC6366C442MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M44G	-	88N44G-AF5	Vdet-IC	4.4V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M44L	-	88N44L-AF5	Vdet-IC	4.4V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M45	-	88N45-AF5	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M45	eb	XC6368C452MR	DC-DC-IC	PWM/PFM step-up, 4.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M45	eh	XC6382D451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M45	ek	XC6366C452MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M45G	-	88N45G-AF5	Vdet-IC	4.5V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M45L	-	88N45L-AF5	Vdet-IC	4.5V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M46	-	88N46-AF5	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M46	eb	XC6368C462MR	DC-DC-IC	PWM/PFM step-up, 4.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M46	eh	XC6382D461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M46	ek	XC6366C462MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M46G	-	88N46G-AF5	Vdet-IC	4.6V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M46L	-	88N46L-AF5	Vdet-IC	4.6V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M47	-	88N47-AF5	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M47	eb	XC6368C472MR	DC-DC-IC	PWM/PFM step-up, 4.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M47	eh	XC6382D471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M47	ek	XC6366C472MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M47G	-	88N47G-AF5	Vdet-IC	4.7V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M47L	-	88N47L-AF5	Vdet-IC	4.7V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M48	-	88N48-AF5	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M48	eb	XC6368C482MR	DC-DC-IC	PWM/PFM step-up, 4.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M48	eh	XC6382D481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M48	ek	XC6366C482MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M48G	-	88N48G-AF5	Vdet-IC	4.8V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M48L	-	88N48L-AF5	Vdet-IC	4.8V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M49	-	88N49-AF5	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M49	eb	XC6368C492MR	DC-DC-IC	PWM/PFM step-up, 4.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M49	eh	XC6382D491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M49	ek	XC6366C492MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M49G	-	88N49G-AF5	Vdet-IC	4.9V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M49L	-	88N49L-AF5	Vdet-IC	4.9V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M4A	-	XC6108N24AMR	Vdet-IC	2.4V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M4A	-	XC6118C14AMR-G	Vdet-IC	1.4V±30mV, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
M4A	eb	XC6368C403MR	DC-DC-IC	PWM/PFM step-up, 4.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M4A	ek	XC6366C403MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M4A	et	TC105403ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 4.0V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M4B	-	XC6108N24BMR	Vdet-IC	2.4V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M4B	-	XC6118C14BMR-G	Vdet-IC	1.4V±30mV, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
M4B	eb	XC6368C413MR	DC-DC-IC	PWM/PFM step-up, 4.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M4B	ek	XC6366C413MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M4B	et	TC105413ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 4.1V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M4C	-	XC6108N24CMR	Vdet-IC	2.4V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M4C	-	XC6118C14CMR-G	Vdet-IC	1.4V±30mV, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
M4C	eb	XC6368C423MR	DC-DC-IC	PWM/PFM step-up, 4.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M4C	ek	XC6366C423MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M4C	et	TC105423ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 4.2V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M4D	-	XC6108N24DMR	Vdet-IC	2.4V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M4D	-	XC6118C14DMR-G	Vdet-IC	1.4V±30mV, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
M4D	eb	XC6368C433MR	DC-DC-IC	PWM/PFM step-up, 4.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M4D	ek	XC6366C433MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M4D	et	TC105433ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 4.3V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M4E	eb	XC6368C443MR	DC-DC-IC	PWM/PFM step-up, 4.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M4E	ek	XC6366C443MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M4E	et	TC105443ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 4.4V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M4F	eb	XC6368C453MR	DC-DC-IC	PWM/PFM step-up, 4.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M4F	ek	XC6366C453MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M4F	et	TC105453ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 4.5V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M4H	eb	XC6368C463MR	DC-DC-IC	PWM/PFM step-up, 4.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M4H	ek	XC6366C463MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M4H	et	TC105463ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 4.6V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M4K	eb	XC6368C473MR	DC-DC-IC	PWM/PFM step-up, 4.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M4K	ek	XC6366C473MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M4K	et	TC105473ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 4.7V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M4L	eb	XC6368C483MR	DC-DC-IC	PWM/PFM step-up, 4.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M4L	ek	XC6366C483MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M4L	et	TC105483ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 4.8V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M4M	eb	XC6368C493MR	DC-DC-IC	PWM/PFM step-up, 4.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M4M	ek	XC6366C493MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M4M	et	TC105493ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 4.9V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
m5	-	BD46E281G-M	Vdet-IC	2.8V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
M5	-	BL8554CA5TR15	LVR-IC	LDO, 1.5V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M5	-	BL8554CB5ATR15	LVR-IC	LDO, 1.5V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M5	-	BL8554CB5BTR15	LVR-IC	LDO, 1.5V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M5	-	R1121N351A	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
M5	-	RN5RG55AA	LVR-IC	Ext. transistor, 5.5V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
M5	-	RT9168A-20CBR	LVR-IC	LDO, 2.0V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
M5	ea	RN5RY451A	DC-DC-IC	VFM step-up, 4.5V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
M5	eu	BL8554CA5TR25	LVR-IC	LDO, 2.5V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M5	eu	BL8554CB5ATR25	LVR-IC	LDO, 2.5V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M5	eu	BL8554CB5BTR25	LVR-IC	LDO, 2.5V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M5	fg	BL8554CA5TR35	LVR-IC	LDO, 3.5V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M5	fg	BL8554CB5ATR35	LVR-IC	LDO, 3.5V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M5	fg	BL8554CB5BTR35	LVR-IC	LDO, 3.5V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M5	fh	BL8554CA5TR45	LVR-IC	LDO, 4.5V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M5	fh	BL8554CB5ATR45	LVR-IC	LDO, 4.5V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M5	fh	BL8554CB5BTR45	LVR-IC	LDO, 4.5V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M50	-	88N50-AF5	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M50	-	R1224N502M	DC-DC-IC	PWM step-down, 5V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
M50	eb	XC6368C502MR	DC-DC-IC	PWM/PFM step-up, 5.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M50	eh	XC6382D501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M50	ek	XC6366C502MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M50G	-	88N50G-AF5	Vdet-IC	5.0V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M50L	-	88N50L-AF5	Vdet-IC	5.0V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M51	-	88N51-AF5	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M51	eb	XC6368C512MR	DC-DC-IC	PWM/PFM step-up, 5.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M51	eh	XC6382D511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M51	ek	XC6366C512MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M512	-	AMS5312	LVR-IC	LDO, 1.2V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M513	-	AMS5313	LVR-IC	LDO, 1.3V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M514	-	AMS5314	LVR-IC	LDO, 1.4V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M515	-	AMS5315	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M516	-	AMS5316	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M517	-	AMS5317	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M518	-	AMS5318	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M519	-	AMS5319	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M51G	-	88N51G-AF5	Vdet-IC	5.1V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M51L	-	88N51L-AF5	Vdet-IC	5.1V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M52	-	88N52-AF5	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M52	eb	XC6368C522MR	DC-DC-IC	PWM/PFM step-up, 5.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M52	eh	XC6382D521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M52	ek	XC6366C522MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M520	-	AMS5320	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M521	-	AMS5321	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M522	-	AMS5322	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M523	-	AMS5323	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M524	-	AMS5324	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M525	-	AMS5325	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M526	-	AMS5326	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M527	-	AMS5327	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M528	-	AMS5328	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M529	-	AMS5329	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M52G	-	88N52G-AF5	Vdet-IC	5.2V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M52L	-	88N52L-AF5	Vdet-IC	5.2V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M53	-	88N53-AF5	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M53	-	TC53N2502ECT	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
M53	eb	XC6368C532MR	DC-DC-IC	PWM/PFM step-up, 5.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M53	eh	XC6382D531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M53	ek	XC6366C532MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M530	-	AMS5330	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M531	-	AMS5331	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M532	-	AMS5332	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M533	-	AMS5333	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M534	-	AMS5334	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M535	-	AMS5335	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M536	-	AMS5336	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M537	-	AMS5337	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M538	-	AMS5338	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M539	-	AMS5339	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M53G	-	88N53G-AF5	Vdet-IC	5.3V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M53L	-	88N53L-AF5	Vdet-IC	5.3V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M54	-	88N54-AF5	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M54	eb	XC6368C542MR	DC-DC-IC	PWM/PFM step-up, 5.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M54	eh	XC6382D541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M54	ek	XC6366C542MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M540	-	AMS5340	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M541	-	AMS5341	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M542	-	AMS5342	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M543	-	AMS5343	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M544	-	AMS5344	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M545	-	AMS5345	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M546	-	AMS5346	LVR-IC	LDO, 4.6V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M547	-	AMS5347	LVR-IC	LDO, 4.7V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M548	-	AMS5348	LVR-IC	LDO, 4.8V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M549	-	AMS5349	LVR-IC	LDO, 4.9V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M54G	-	88N54G-AF5	Vdet-IC	5.4V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M54L	-	88N54L-AF5	Vdet-IC	5.4V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M55	-	88N55-AF5	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M55	-	R1224N552M	DC-DC-IC	PWM step-down, 5.5V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric
M55	eb	XC6368C552MR	DC-DC-IC	PWM/PFM step-up, 5.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M55	eh	XC6382D551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M55	ek	XC6366C552MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M550	-	AMS5350	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M551	-	AMS5351	LVR-IC	LDO, 5.1V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M552	-	AMS5352	LVR-IC	LDO, 5.2V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M553	-	AMS5353	LVR-IC	LDO, 5.3V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M554	-	AMS5354	LVR-IC	LDO, 5.4V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M555	-	AMS5355	LVR-IC	LDO, 5.5V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M556	-	AMS5356	LVR-IC	LDO, 5.6V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M557	-	AMS5357	LVR-IC	LDO, 5.7V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M558	-	AMS5358	LVR-IC	LDO, 5.8V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M559	-	AMS5359	LVR-IC	LDO, 5.9V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M55G	-	88N55G-AF5	Vdet-IC	5.5V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M55L	-	88N55L-AF5	Vdet-IC	5.5V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M56	-	88N56-AF5	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M56	eb	XC6368C562MR	DC-DC-IC	PWM/PFM step-up, 5.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M56	eh	XC6382D561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M56	ek	XC6366C562MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M560	-	AMS5360	LVR-IC	LDO, 6.0V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M561	-	AMS5361	LVR-IC	LDO, 6.1V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M562	-	AMS5362	LVR-IC	LDO, 6.2V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M563	-	AMS5363	LVR-IC	LDO, 6.3V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M564	-	AMS5364	LVR-IC	LDO, 6.4V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M565	-	AMS5368	LVR-IC	LDO, 6.5V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M566	-	AMS5366	LVR-IC	LDO, 6.6V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M567	-	AMS5367	LVR-IC	LDO, 6.7V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M568	-	AMS5368	LVR-IC	LDO, 6.8V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M569	-	AMS5369	LVR-IC	LDO, 6.9V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M56G	-	88N56G-AF5	Vdet-IC	5.6V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M56L	-	88N56L-AF5	Vdet-IC	5.6V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M57	-	88N57-AF5	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M57	eb	XC6368C572MR	DC-DC-IC	PWM/PFM step-up, 5.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M57	eh	XC6382D571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M57	ek	XC6366C572MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M570	-	AMS5370	LVR-IC	LDO, 7.0V±2%, 500mA	SOT-23-5	28sz	VR1	6a	Ams
M57G	-	88N57G-AF5	Vdet-IC	5.7V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M57L	-	88N57L-AF5	Vdet-IC	5.7V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M58	-	88N58-AF5	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M58	eb	XC6368C582MR	DC-DC-IC	PWM/PFM step-up, 5.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M58	eh	XC6382D581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M58	ek	XC6366C582MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M58G	-	88N58G-AF5	Vdet-IC	5.8V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M58L	-	88N58L-AF5	Vdet-IC	5.8V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M59	-	88N59-AF5	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M59	eb	XC6368C592MR	DC-DC-IC	PWM/PFM step-up, 5.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M59	eh	XC6382D591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M59	ek	XC6366C592MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M59G	-	88N59G-AF5	Vdet-IC	5.9V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M59L	-	88N59L-AF5	Vdet-IC	5.9V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M5A	-	XC6108N25AMR	Vdet-IC	2.5V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M5A	-	XC6118C15AMR-G	Vdet-IC	1.5V±30mV, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
M5A	eb	XC6368C503MR	DC-DC-IC	PWM/PFM step-up, 5.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M5A	ek	XC6366C503MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M5A	et	TC105503ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 5.0V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M5B	-	XC6108N25BMR	Vdet-IC	2.5V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M5B	-	XC6118C15BMR-G	Vdet-IC	1.5V±30mV, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
M5B	eb	XC6368C513MR	DC-DC-IC	PWM/PFM step-up, 5.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M5B	ek	XC6366C513MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M5B	et	TC105513ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 5.1V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M5C	-	XC6108N25CMR	Vdet-IC	2.5V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M5C	-	XC6118C15CMR-G	Vdet-IC	1.5V±30mV, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
M5C	eb	XC6368C523MR	DC-DC-IC	PWM/PFM step-up, 5.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M5C	ek	XC6366C523MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M5C	et	TC105523ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 5.2V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M5D	-	XC6108N25DMR	Vdet-IC	2.5V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M5D	-	XC6118C15DMR-G	Vdet-IC	1.5V±30mV, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
M5D	eb	XC6368C533MR	DC-DC-IC	PWM/PFM step-up, 5.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M5D	ek	XC6366C533MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M5D	et	TC105533ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 5.3V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M5E	eb	XC6368C543MR	DC-DC-IC	PWM/PFM step-up, 5.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M5E	ek	XC6366C543MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M5E	et	TC105543ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 5.4V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M5F	eb	XC6368C553MR	DC-DC-IC	PWM/PFM step-up, 5.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M5F	ek	XC6366C553MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M5F	et	TC105553ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 5.5V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M5H	eb	XC6368C563MR	DC-DC-IC	PWM/PFM step-up, 5.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M5H	ek	XC6366C563MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M5H	et	TC105563ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 5.6V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M5K	eb	XC6368C573MR	DC-DC-IC	PWM/PFM step-up, 5.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M5K	ek	XC6366C573MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M5K	et	TC105573ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 5.7V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M5L	eb	XC6368C583MR	DC-DC-IC	PWM/PFM step-up, 5.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M5L	ek	XC6366C583MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M5L	et	TC105583ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 5.8V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M5M	eb	XC6368C593MR	DC-DC-IC	PWM/PFM step-up, 5.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M5M	ek	XC6366C593MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M5M	et	TC105593ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 5.9V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
m6	-	BD46E291G-M	Vdet-IC	2.9V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
M6	-	BL8554CA5TR16	LVR-IC	LDO, 1.6V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M6	-	BL8554CB5ATR16	LVR-IC	LDO, 1.6V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M6	-	BL8554CB5BTR16	LVR-IC	LDO, 1.6V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M6	-	BU1CUB3WG	LVR-IC	LDO, 1.25V±1%, 360mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
M6	-	R1121N361A	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
M6	-	RN5RG56AA	LVR-IC	Ext. transistor, 5.6V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
M6	-	RT9168A-21CBR	LVR-IC	LDO, 2.1V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
M6	ea	RN5RY461A	DC-DC-IC	VFM step-up, 4.6V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
M6	eu	BL8554CA5TR26	LVR-IC	LDO, 2.6V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M6	eu	BL8554CB5ATR26	LVR-IC	LDO, 2.6V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M6	eu	BL8554CB5BTR26	LVR-IC	LDO, 2.6V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M6	fg	BL8554CA5TR36	LVR-IC	LDO, 3.6V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M6	fg	BL8554CB5ATR36	LVR-IC	LDO, 3.6V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M6	fg	BL8554CB5BTR36	LVR-IC	LDO, 3.6V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M60	-	88N60-AF5	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23-5	28vdo	VD1	6a	Utc
M60	-	R1224N602M	DC-DC-IC	PWM step-down, 6V±2%, 180kHz	SOT-23-5	28ud	DC7	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M60	eb	XC6368C602MR	DC-DC-IC	PWM/PFM step-up, 6.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M60	eh	XC6382D601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M60	ek	XC6366C602MR	DC-DC-IC	PWM/PFM st-down, 180kHz, 6.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M60G	-	88N60G-AF5	Vdet-IC	6.0V±2%, -Reset ODO, halogen free	SOT-23-5	28vdo	VD1	6a	Utc
M60L	-	88N60L-AF5	Vdet-IC	6.0V±2%, -Reset ODO, lead free	SOT-23-5	28vdo	VD1	6a	Utc
M61	eb	XC6368C612MR	DC-DC-IC	PWM/PFM step-up, 6.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M61	eh	XC6382D611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M62	eb	XC6368C622MR	DC-DC-IC	PWM/PFM step-up, 6.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M62	eh	XC6382D621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M63	-	TC53N2602ECT	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
M63	eb	XC6368C632MR	DC-DC-IC	PWM/PFM step-up, 6.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M63	eh	XC6382D631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M64	eb	XC6368C642MR	DC-DC-IC	PWM/PFM step-up, 6.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M64	eh	XC6382D641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M65	eb	XC6368C652MR	DC-DC-IC	PWM/PFM step-up, 6.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M65	eh	XC6382D651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M66	eh	XC6382D661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M67	eh	XC6382D671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M68	eh	XC6382D681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M69	eh	XC6382D691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M6A	-	XC6108N26AMR	Vdet-IC	2.6V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M6A	-	XC6118C16AMR-G	Vdet-IC	1.6V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
M6A	eb	XC6368C603MR	DC-DC-IC	PWM/PFM step-up, 6.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M6A	ek	XC6366C603MR	DC-DC-IC	PWM/PFM st-down, 300kHz, 6.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
M6A	et	TC105603ECT	DC-DC-IC	PWM/PFM step-down, 300kHz, 6.0V±1%, 1A, +CE	SOT-23-5	28zm	DC7	6g	Mcc
M6B	-	XC6108N26BMR	Vdet-IC	2.6V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M6B	-	XC6118C16BMR-G	Vdet-IC	1.6V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
M6B	eb	XC6368C613MR	DC-DC-IC	PWM/PFM step-up, 6.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M6C	-	XC6108N26CMR	Vdet-IC	2.6V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M6C	-	XC6118C16CMR-G	Vdet-IC	1.6V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
M6C	eb	XC6368C623MR	DC-DC-IC	PWM/PFM step-up, 6.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M6D	-	XC6108N26DMR	Vdet-IC	2.6V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M6D	-	XC6118C16DMR-G	Vdet-IC	1.6V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
M6D	eb	XC6368C633MR	DC-DC-IC	PWM/PFM step-up, 6.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M6E	eb	XC6368C643MR	DC-DC-IC	PWM/PFM step-up, 6.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
M6F	eb	XC6368C653MR	DC-DC-IC	PWM/PFM step-up, 6.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
m7	-	BD46E301G-M	Vdet-IC	3.0V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
M7	-	BL8554CA5TR17	LVR-IC	LDO, 1.7V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M7	-	BL8554CB5ATR17	LVR-IC	LDO, 1.7V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M7	-	BL8554CB5BTR17	LVR-IC	LDO, 1.7V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M7	-	BU15UB3WG	LVR-IC	LDO, 1.5V±1%, 360mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
M7	-	R1121N371A	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
M7	-	RN5RG57AA	LVR-IC	Ext. transistor, 5.7V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
M7	-	RT9168A-22CBR	LVR-IC	LDO, 2.2V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
M7	ea	RN5RY471A	DC-DC-IC	VFM step-up, 4.7V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
M7	eu	BL8554CA5TR27	LVR-IC	LDO, 2.7V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M7	eu	BL8554CB5ATR27	LVR-IC	LDO, 2.7V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M7	eu	BL8554CB5BTR27	LVR-IC	LDO, 2.7V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M7	fg	BL8554CA5TR37	LVR-IC	LDO, 3.7V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M7	fg	BL8554CB5ATR37	LVR-IC	LDO, 3.7V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M7	fg	BL8554CB5BTR37	LVR-IC	LDO, 3.7V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M70	eh	XC6382D701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
M73	-	TC53N2702ECT	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
M7A	-	XC6108N27AMR	Vdet-IC	2.7V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M7A	-	XC6118C17AMR-G	Vdet-IC	1.7V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
M7B	-	XC6108N27BMR	Vdet-IC	2.7V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M7B	-	XC6118C17BMR-G	Vdet-IC	1.7V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
M7C	-	XC6108N27CMR	Vdet-IC	2.7V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M7C	-	XC6118C17CMR-G	Vdet-IC	1.7V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
M7D	-	XC6108N27DMR	Vdet-IC	2.7V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M7D	-	XC6118C17DMR-G	Vdet-IC	1.7V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
m8	-	BD46E311G-M	Vdet-IC	3.1V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
M8	-	BL8554CA5TR18	LVR-IC	LDO, 1.8V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M8	-	BL8554CB5ATR18	LVR-IC	LDO, 1.8V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M8	-	BL8554CB5BTR18	LVR-IC	LDO, 1.8V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M8	-	BU1JUB3WG	LVR-IC	LDO, 1.85V±1%, 360mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
M8	-	R1121N381A	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
M8	-	RN5RG58AA	LVR-IC	Ext. transistor, 5.8V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
M8	-	RT9168A-23CBR	LVR-IC	LDO, 2.3V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
M8	ea	RN5RY481A	DC-DC-IC	VFM step-up, 4.8V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M8	eu	BL8554CA5TR28	LVR-IC	LDO, 2.8V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M8	eu	BL8554CB5ATR28	LVR-IC	LDO, 2.8V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M8	eu	BL8554CB5BTR28	LVR-IC	LDO, 2.8V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M8	fg	BL8554CA5TR38	LVR-IC	LDO, 3.8V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M8	fg	BL8554CB5ATR38	LVR-IC	LDO, 3.8V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M8	fg	BL8554CB5BTR38	LVR-IC	LDO, 3.8V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M83	-	TC53N2802ECT	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
M8A	-	XC6108N28AMR	Vdet-IC	2.8V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M8A	-	XC6118C18AMR-G	Vdet-IC	1.8V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
M8B	-	XC6108N28BMR	Vdet-IC	2.8V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M8B	-	XC6118C18BMR-G	Vdet-IC	1.8V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
M8C	-	XC6108N28CMR	Vdet-IC	2.8V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M8C	-	XC6118C18CMR-G	Vdet-IC	1.8V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
M8D	-	XC6108N28DMR	Vdet-IC	2.8V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M8D	-	XC6118C18DMR-G	Vdet-IC	1.8V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
m9	-	BD46E321G-M	Vdet-IC	3.2V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
M9	-	BL8554CA5TR19	LVR-IC	LDO, 1.9V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M9	-	BL8554CB5ATR19	LVR-IC	LDO, 1.9V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M9	-	BL8554CB5BTR19	LVR-IC	LDO, 1.9V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M9	-	BU19UB3WG	LVR-IC	LDO, 1.9V±1%, 360mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
M9	-	R1121N391A	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
M9	-	RN5RG59AA	LVR-IC	Ext. transistor, 5.9V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
M9	-	RT9168A-24CBR	LVR-IC	LDO, 2.4V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
M9	ea	RN5RY491A	DC-DC-IC	VFM step-up, 4.9V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
M9	eu	BL8554CA5TR29	LVR-IC	LDO, 2.9V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M9	eu	BL8554CB5ATR29	LVR-IC	LDO, 2.9V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M9	eu	BL8554CB5BTR29	LVR-IC	LDO, 2.9V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M9	fg	BL8554CA5TR39	LVR-IC	LDO, 3.9V±2%, 300mA. +CE	SC-70-5	28cx	VR4	6kf	Shb
M9	fg	BL8554CB5ATR39	LVR-IC	LDO, 3.9V±2%, 300mA. +CE	SOT-23-5	28cx	VR4	6kf	Shb
M9	fg	BL8554CB5BTR39	LVR-IC	LDO, 3.9V±2%, 300mA. +CE	SOT-23-5	28vt	VR4	6kg	Shb
M93	-	TC53N2902ECT	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
M9A	-	XC6108N29AMR	Vdet-IC	2.9V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M9A	-	XC6118C19AMR-G	Vdet-IC	1.9V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
M9B	-	XC6108N29BMR	Vdet-IC	2.9V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
M9B	-	XC6118C19BMR-G	Vdet-IC	1.9V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
M9C	-	XC6108N29CMR	Vdet-IC	2.9V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M9C	-	XC6118C19CMR-G	Vdet-IC	1.9V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
M9D	-	XC6108N29DMR	Vdet-IC	2.9V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
M9D	-	XC6118C19DMR-G	Vdet-IC	1.9V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
Ma	-	BD52E25G-M	Vdet-IC	2.5V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MA	-	RT9168A-25CBR	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
MA8	-	XC9237C08CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MA9	-	XC9237C09CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MAL	-	XC9237C0LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MAM	-	XC9237C0MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
Mb	-	BD52E26G-M	Vdet-IC	2.6V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MB	-	RT9168A-26CBR	LVR-IC	LDO, 2.6V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
MB0	-	XC9237C10CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MB1	-	XC9237C11CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MB2	-	XC9237C12CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MB3	-	XC9237C13CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MB4	-	XC9237C14CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MB5	-	XC9237C15CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MB5	eb	XC6368C151MR	DC-DC-IC	PWM/PFM step-up, 1.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MB5	ek	XC6366C151MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MB6	-	XC9237C16CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MB6	eb	XC6368C161MR	DC-DC-IC	PWM/PFM step-up, 1.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MB6	ek	XC6366C161MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MB7	-	XC9237C17CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MB7	eb	XC6368C171MR	DC-DC-IC	PWM/PFM step-up, 1.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MB7	ek	XC6366C171MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MB8	-	XC9237C18CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MB8	eb	XC6368C181MR	DC-DC-IC	PWM/PFM step-up, 1.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MB8	ek	XC6366C181MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MB9	-	XC9237C19CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MB9	eb	XC6368C191MR	DC-DC-IC	PWM/PFM step-up, 1.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MB9	ek	XC6366C191MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MBA	-	XC9237C1ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MBB	-	XC9237C1BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MBC	-	XC9237C1CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MBD	-	XC9237C1DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MBE	-	XC9237C1ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MBF	-	XC9237C1FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MBF	eb	XC6368C155MR	DC-DC-IC	PWM/PFM step-up, 1.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MBF	ek	XC6366C155MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MBH	-	XC9237C1HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MBH	eb	XC6368C165MR	DC-DC-IC	PWM/PFM step-up, 1.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MBH	ek	XC6366C165MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MBK	-	XC9237C1KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MBK	eb	XC6368C175MR	DC-DC-IC	PWM/PFM step-up, 1.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MBK	ek	XC6366C175MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MBL	-	XC9237C1LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MBL	eb	XC6368C185MR	DC-DC-IC	PWM/PFM step-up, 1.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MBL	ek	XC6366C185MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MBM	-	XC9237C1MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MBM	eb	XC6368C195MR	DC-DC-IC	PWM/PFM step-up, 1.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MBM	ek	XC6366C195MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
Mc	-	BD52E27G-M	Vdet-IC	2.7V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MC	-	RT9168A-27CBR	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
MC0	-	XC9237C20CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MC0	eb	XC6368C201MR	DC-DC-IC	PWM/PFM step-up, 2.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MC0	ek	XC6366C201MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MC1	-	XC9237C21CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MC1	eb	XC6368C211MR	DC-DC-IC	PWM/PFM step-up, 2.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MC1	ek	XC6366C211MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MC2	-	XC9237C22CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MC2	eb	XC6368C221MR	DC-DC-IC	PWM/PFM step-up, 2.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MC2	ek	XC6366C221MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MC3	-	XC9237C23CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MC3	eb	XC6368C231MR	DC-DC-IC	PWM/PFM step-up, 2.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MC3	ek	XC6366C231MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MC4	-	XC9237C24CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MC4	eb	XC6368C241MR	DC-DC-IC	PWM/PFM step-up, 2.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MC4	ek	XC6366C241MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MC5	-	XC9237C25CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MC5	eb	XC6368C251MR	DC-DC-IC	PWM/PFM step-up, 2.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MC5	ek	XC6366C251MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MC6	-	XC9237C26CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MC6	eb	XC6368C261MR	DC-DC-IC	PWM/PFM step-up, 2.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MC6	ek	XC6366C261MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MC7	-	XC9237C27CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MC7	eb	XC6368C271MR	DC-DC-IC	PWM/PFM step-up, 2.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MC7	ek	XC6366C271MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MC8	-	XC9237C28CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MC8	eb	XC6368C281MR	DC-DC-IC	PWM/PFM step-up, 2.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MC8	ek	XC6366C281MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MC9	-	XC9237C29CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MC9	eb	XC6368C291MR	DC-DC-IC	PWM/PFM step-up, 2.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MC9	ek	XC6366C291MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MCA	-	XC9237C2ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MCA	eb	XC6368C205MR	DC-DC-IC	PWM/PFM step-up, 2.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MCA	ek	XC6366C205MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MCB	-	XC9237C2BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MCB	eb	XC6368C215MR	DC-DC-IC	PWM/PFM step-up, 2.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MCB	ek	XC6366C215MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MCC	-	XC9237C2CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MCC	eb	XC6368C225MR	DC-DC-IC	PWM/PFM step-up, 2.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MCC	ek	XC6366C225MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MCD	-	XC9237C2DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MCD	eb	XC6368C235MR	DC-DC-IC	PWM/PFM step-up, 2.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MCD	ek	XC6366C235MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MCE	-	XC9237C2ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MCE	eb	XC6368C245MR	DC-DC-IC	PWM/PFM step-up, 2.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MCE	ek	XC6366C245MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MCF	-	XC9237C2FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MCF	eb	XC6368C255MR	DC-DC-IC	PWM/PFM step-up, 2.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MCF	ek	XC6366C255MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MCH	-	XC9237C2HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MCH	eb	XC6368C265MR	DC-DC-IC	PWM/PFM step-up, 2.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MCH	ek	XC6366C265MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MCK	-	XC9237C2KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MCK	eb	XC6368C275MR	DC-DC-IC	PWM/PFM step-up, 2.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MCK	ek	XC6366C275MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MCL	-	XC9237C2LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MCL	eb	XC6368C285MR	DC-DC-IC	PWM/PFM step-up, 2.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MCL	ek	XC6366C285MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MCM	-	XC9237C2MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MCM	eb	XC6368C295MR	DC-DC-IC	PWM/PFM step-up, 2.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MCM	ek	XC6366C295MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
Md	-	BD52E28G-M	Vdet-IC	2.8V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MD	-	BD5223FVE	Vdet-IC	2.3V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
MD	-	BD5223G	Vdet-IC	2.3V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MD	-	RT9168A-28CBR	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
MD0	-	XC9237C30CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MD0	eb	XC6368C301MR	DC-DC-IC	PWM/PFM step-up, 3.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MD0	ek	XC6366C301MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MD1	-	XC9237C31CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MD1	eb	XC6368C311MR	DC-DC-IC	PWM/PFM step-up, 3.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MD1	ek	XC6366C311MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MD2	-	XC9237C32CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MD2	eb	XC6368C321MR	DC-DC-IC	PWM/PFM step-up, 3.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MD2	ek	XC6366C321MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MD3	-	XC9237C33CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MD3	eb	XC6368C331MR	DC-DC-IC	PWM/PFM step-up, 3.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MD3	ek	XC6366C331MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MD4	-	XC9237C34CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MD4	eb	XC6368C341MR	DC-DC-IC	PWM/PFM step-up, 3.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MD4	ek	XC6366C341MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MD5	-	XC9237C35CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MD5	eb	XC6368C351MR	DC-DC-IC	PWM/PFM step-up, 3.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MD5	ek	XC6366C351MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MD6	-	XC9237C36CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MD6	eb	XC6368C361MR	DC-DC-IC	PWM/PFM step-up, 3.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MD6	ek	XC6366C361MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MD7	-	XC9237C37CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MD7	eb	XC6368C371MR	DC-DC-IC	PWM/PFM step-up, 3.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MD7	ek	XC6366C371MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MD8	-	XC9237C38CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MD8	eb	XC6368C381MR	DC-DC-IC	PWM/PFM step-up, 3.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MD8	ek	XC6366C381MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MD9	-	XC9237C39CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MD9	eb	XC6368C391MR	DC-DC-IC	PWM/PFM step-up, 3.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MD9	ek	XC6366C391MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MDA	-	XC9237C3ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MDA	eb	XC6368C305MR	DC-DC-IC	PWM/PFM step-up, 3.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MDA	ek	XC6366C305MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MDB	-	XC9237C3BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MDB	eb	XC6368C315MR	DC-DC-IC	PWM/PFM step-up, 3.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MDB	ek	XC6366C315MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MDC	-	XC9237C3CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MDC	eb	XC6368C325MR	DC-DC-IC	PWM/PFM step-up, 3.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MDC	ek	XC6366C325MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MDD	-	XC9237C3DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MDD	eb	XC6368C335MR	DC-DC-IC	PWM/PFM step-up, 3.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MDD	ek	XC6366C335MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MDE	-	XC9237C3ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MDE	eb	XC6368C345MR	DC-DC-IC	PWM/PFM step-up, 3.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MDE	ek	XC6366C345MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MDF	-	XC9237C3FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MDF	eb	XC6368C355MR	DC-DC-IC	PWM/PFM step-up, 3.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MDF	ek	XC6366C355MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MDH	-	XC9237C3HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MDH	eb	XC6368C365MR	DC-DC-IC	PWM/PFM step-up, 3.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MDH	ek	XC6366C365MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MDK	-	XC9237C3KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MDK	eb	XC6368C375MR	DC-DC-IC	PWM/PFM step-up, 3.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MDK	ek	XC6366C375MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MDL	-	XC9237C3LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MDL	eb	XC6368C385MR	DC-DC-IC	PWM/PFM step-up, 3.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MDL	ek	XC6366C385MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MDM	-	XC9237C3MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MDM	eb	XC6368C395MR	DC-DC-IC	PWM/PFM step-up, 3.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MDM	ek	XC6366C395MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
Me	-	BD52E29G-M	Vdet-IC	2.9V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ME	-	BD5224FVE	Vdet-IC	2.4V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
ME	-	BD5224G	Vdet-IC	2.4V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ME	-	RT9168A-29CBR	LVR-IC	LDO, 2.9V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
ME0	-	XC9237C40CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
ME0	eb	XC6368C401MR	DC-DC-IC	PWM/PFM step-up, 4.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
ME0	ek	XC6366C401MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
ME1	eb	XC6368C411MR	DC-DC-IC	PWM/PFM step-up, 4.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
ME1	ek	XC6366C411MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
ME2	eb	XC6368C421MR	DC-DC-IC	PWM/PFM step-up, 4.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
ME2	ek	XC6366C421MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
ME3	eb	XC6368C431MR	DC-DC-IC	PWM/PFM step-up, 4.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
ME3	ek	XC6366C431MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
ME4	eb	XC6368C441MR	DC-DC-IC	PWM/PFM step-up, 4.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
ME4	ek	XC6366C441MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
ME5	eb	XC6368C451MR	DC-DC-IC	PWM/PFM step-up, 4.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
ME5	ek	XC6366C451MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
ME6	eb	XC6368C461MR	DC-DC-IC	PWM/PFM step-up, 4.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
ME6	ek	XC6366C461MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
ME7	eb	XC6368C471MR	DC-DC-IC	PWM/PFM step-up, 4.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
ME7	ek	XC6366C471MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
ME8	eb	XC6368C481MR	DC-DC-IC	PWM/PFM step-up, 4.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
ME8	ek	XC6366C481MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
ME9	eb	XC6368C491MR	DC-DC-IC	PWM/PFM step-up, 4.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
ME9	ek	XC6366C491MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MEA	eb	XC6368C405MR	DC-DC-IC	PWM/PFM step-up, 4.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MEA	ek	XC6366C405MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MEB	eb	XC6368C415MR	DC-DC-IC	PWM/PFM step-up, 4.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MEB	ek	XC6366C415MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MEC	eb	XC6368C425MR	DC-DC-IC	PWM/PFM step-up, 4.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MEC	ek	XC6366C425MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MED	eb	XC6368C435MR	DC-DC-IC	PWM/PFM step-up, 4.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MED	ek	XC6366C435MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MEE	eb	XC6368C445MR	DC-DC-IC	PWM/PFM step-up, 4.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MEE	ek	XC6366C445MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MEF	eb	XC6368C455MR	DC-DC-IC	PWM/PFM step-up, 4.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MEF	ek	XC6366C455MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MEH	eb	XC6368C465MR	DC-DC-IC	PWM/PFM step-up, 4.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MEH	ek	XC6366C465MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MEK	eb	XC6368C475MR	DC-DC-IC	PWM/PFM step-up, 4.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MEK	ek	XC6366C475MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MEL	eb	XC6368C485MR	DC-DC-IC	PWM/PFM step-up, 4.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MEL	ek	XC6366C485MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MEM	eb	XC6368C495MR	DC-DC-IC	PWM/PFM step-up, 4.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MEM	ek	XC6366C495MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
Mf	-	BD52E30G-M	Vdet-IC	3.0V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MF	-	BD5225FVE	Vdet-IC	2.5V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
MF	-	BD5225G	Vdet-IC	2.5V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MF	-	RT9168A-30CBR	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
MF0	eb	XC6368C501MR	DC-DC-IC	PWM/PFM step-up, 5.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MF0	ek	XC6366C501MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MF1	eb	XC6368C511MR	DC-DC-IC	PWM/PFM step-up, 5.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MF1	ek	XC6366C511MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MF2	eb	XC6368C521MR	DC-DC-IC	PWM/PFM step-up, 5.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MF2	ek	XC6366C521MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MF3	eb	XC6368C531MR	DC-DC-IC	PWM/PFM step-up, 5.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MF3	ek	XC6366C531MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MF4	eb	XC6368C541MR	DC-DC-IC	PWM/PFM step-up, 5.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MF4	ek	XC6366C541MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MF5	eb	XC6368C551MR	DC-DC-IC	PWM/PFM step-up, 5.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MF5	ek	XC6366C551MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MF6	eb	XC6368C561MR	DC-DC-IC	PWM/PFM step-up, 5.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MF6	ek	XC6366C561MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MF7	eb	XC6368C571MR	DC-DC-IC	PWM/PFM step-up, 5.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MF7	ek	XC6366C571MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MF8	-	XC9237C08DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MF8	eb	XC6368C581MR	DC-DC-IC	PWM/PFM step-up, 5.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MF8	ek	XC6366C581MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MF9	-	XC9237C09DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MF9	eb	XC6368C591MR	DC-DC-IC	PWM/PFM step-up, 5.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MF9	ek	XC6366C591MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MFA	eb	XC6368C505MR	DC-DC-IC	PWM/PFM step-up, 5.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MFA	ek	XC6366C505MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MFB	eb	XC6368C515MR	DC-DC-IC	PWM/PFM step-up, 5.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MFB	ek	XC6366C515MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.1V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MFC	eb	XC6368C525MR	DC-DC-IC	PWM/PFM step-up, 5.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MFC	ek	XC6366C525MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.2V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MFD	eb	XC6368C535MR	DC-DC-IC	PWM/PFM step-up, 5.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MFD	ek	XC6366C535MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.3V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MFE	eb	XC6368C545MR	DC-DC-IC	PWM/PFM step-up, 5.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MFE	ek	XC6366C545MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.4V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MFF	eb	XC6368C555MR	DC-DC-IC	PWM/PFM step-up, 5.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MFF	ek	XC6366C555MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.5V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MFH	eb	XC6368C565MR	DC-DC-IC	PWM/PFM step-up, 5.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MFH	ek	XC6366C565MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.6V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MFK	eb	XC6368C575MR	DC-DC-IC	PWM/PFM step-up, 5.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MFK	ek	XC6366C575MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.7V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MFL	-	XC9237C0LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MFL	eb	XC6368C585MR	DC-DC-IC	PWM/PFM step-up, 5.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MFL	ek	XC6366C585MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.8V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MFM	-	XC9237C0MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MFM	eb	XC6368C595MR	DC-DC-IC	PWM/PFM step-up, 5.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MFM	ek	XC6366C595MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.9V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
Mg	-	BD52E31G-M	Vdet-IC	3.1V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MG	-	BD5226FVE	Vdet-IC	2.6V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
MG	-	BD5226G	Vdet-IC	2.6V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MG	-	RT9168A-31CBR	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
Mh	-	BD52E32G-M	Vdet-IC	3.2V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MH	-	BD5227FVE	Vdet-IC	2.7V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
MH	-	BD5227G	Vdet-IC	2.7V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MH	-	RT9168A-32CBR	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
MH0	-	XC9237C10DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MH0	eb	XC6368C601MR	DC-DC-IC	PWM/PFM step-up, 6.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MH0	ek	XC6366C601MR	DC-DC-IC	PWM/PFM st-down, 100kHz, 6.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MH1	-	XC9237C11DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MH1	eb	XC6368C611MR	DC-DC-IC	PWM/PFM step-up, 6.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MH2	-	XC9237C12DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MH2	eb	XC6368C621MR	DC-DC-IC	PWM/PFM step-up, 6.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MH3	-	XC9237C13DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MH3	eb	XC6368C631MR	DC-DC-IC	PWM/PFM step-up, 6.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MH4	-	XC9237C14DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MH4	eb	XC6368C641MR	DC-DC-IC	PWM/PFM step-up, 6.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MH5	-	XC9237C15DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MH5	eb	XC6368C651MR	DC-DC-IC	PWM/PFM step-up, 6.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MH6	-	XC9237C16DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MH7	-	XC9237C17DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MH8	-	XC9237C18DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MH9	-	XC9237C19DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MHA	-	XC9237C1ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MHA	eb	XC6368C605MR	DC-DC-IC	PWM/PFM step-up, 6.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MHA	ek	XC6366C605MR	DC-DC-IC	PWM/PFM st-down, 500kHz, 6.0V±2.5%, 1A, +CE, soft start	SOT-25	28zm	DC7	6g	Tor
MHB	-	XC9237C1BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MHB	eb	XC6368C615MR	DC-DC-IC	PWM/PFM step-up, 6.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MHC	-	XC9237C1CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MHC	eb	XC6368C625MR	DC-DC-IC	PWM/PFM step-up, 6.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MHD	-	XC9237C1DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MHD	eb	XC6368C635MR	DC-DC-IC	PWM/PFM step-up, 6.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MHE	-	XC9237C1EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MHE	eb	XC6368C645MR	DC-DC-IC	PWM/PFM step-up, 6.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MHF	-	XC9237C1FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MHF	eb	XC6368C655MR	DC-DC-IC	PWM/PFM step-up, 6.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sh	DC11	6g	Tor
MHH	-	XC9237C1HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MHK	-	XC9237C1KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MHL	-	XC9237C1LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MHM	-	XC9237C1MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MJ	-	BD5228FVE	Vdet-IC	2.8V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
MJ	-	BD5228G	Vdet-IC	2.8V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MJ	-	RT9168A-33CBR	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
MJ-	-	RT9168A-33PBR	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
Mk	-	BD52E33G-M	Vdet-IC	3.3V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MK	-	BD5229FVE	Vdet-IC	2.9V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
MK	-	BD5229G	Vdet-IC	2.9V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MK	-	RT9168A-34CBR	LVR-IC	LDO, 3.4V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
MK0	-	XC9237C20DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MK1	-	XC9237C21DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MK2	-	XC9237C22DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MK3	-	XC9237C23DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MK4	-	XC9237C24DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MK5	-	XC9237C25DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MK6	-	XC9237C26DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MK7	-	XC9237C27DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MK8	-	XC9237C28DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MK9	-	XC9237C29DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MKA	-	XC9237C2ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MKB	-	XC9237C2BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MKC	-	XC9237C2CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MKD	-	XC9237C2DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MKE	-	XC9237C2EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MKF	-	XC9237C2FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MKH	-	XC9237C2HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MKK	-	XC9237C2KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MKL	-	XC9237C2LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MKM	-	XC9237C2MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
ML	-	BD5230FVE	Vdet-IC	3.0V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
ML	-	BD5230G	Vdet-IC	3.0V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ML	-	NX3L1G384GW	CMOS-Log	Single-pole single-throw analog switch	SOT-353-1	28	Log86	6a	Nxp
ML	-	R1122N301A	LVR-IC	LDO, Low noise, 3V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
ML	-	RT9168A-35CBR	LVR-IC	LDO, 3.5V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
ML0	-	XC9237C30DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
ML1	-	XC9237C31DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
ML2	-	XC9237C32DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
ML3	-	XC9237C33DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
ML4	-	XC9237C34DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
ML5	-	XC9237C35DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
ML6	-	XC9237C36DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
ML7	-	XC9237C37DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
ML8	-	XC9237C38DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
ML9	-	XC9237C39DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MLA	-	XC9237C3ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MLB	-	XC9237C3BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MLC	-	XC9237C3CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MLD	-	XC9237C3DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MLE	-	XC9237C3EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MLF	-	XC9237C3FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MLH	-	XC9237C3HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MLK	-	XC9237C3KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MLL	-	XC9237C3LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
MLM	-	XC9237C3MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
Mm	-	BD52E34G-M	Vdet-IC	3.4V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MM	-	BD5231FVE	Vdet-IC	3.1V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
MM	-	BD5231G	Vdet-IC	3.1V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MM	-	R1122N311A	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
MM	-	RT9168A-36CBR	LVR-IC	LDO, 3.6V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
MM0	-	XC9237C40DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	SOT-25	28dc4	DC1	6g	Tor
Mn	-	BD52E35G-M	Vdet-IC	3.5V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MN	-	BD5232FVE	Vdet-IC	3.2V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
MN	-	BD5232G	Vdet-IC	3.2V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MN	-	R1122N321A	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
MN	-	RT9168A-37CBR	LVR-IC	LDO, 3.7V±2%, 500mA, +CE	SOT-23-5	28vt	VR4	6g	Rct
MN8	-	XC9237D08CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MN9	-	XC9237D09CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MNL	-	XC9237D0LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MNM	-	XC9237D0MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
mP	-	PT7M7823KTA	Vdet-IC	2.25V±1.5%, -Reset PPO, -MR, WD	SOT-23-5	28cp	VD17	6k	Pti
mP	ea	PT7M7823KTAE	Vdet-IC	2.25V±1.5%, -Reset PPO, -MR, WD, Lead free	SOT-23-5	28cp	VD17	6k	Pti
Mp	-	BD52E36G-M	Vdet-IC	3.6V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MP	-	BD5233FVE	Vdet-IC	3.3V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MP	-	BD5233G	Vdet-IC	3.3V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MP	-	R1122N331A	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
MP0	-	XC9237D10CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MP1	-	XC9237D11CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MP2	-	XC9237D12CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MP3	-	XC9237D13CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MP4	-	XC9237D14CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MP5	-	XC9237D15CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MP6	-	XC9237D16CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MP7	-	XC9237D17CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MP8	-	XC9237D18CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MP9	-	XC9237D19CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MPA	-	XC9237D1ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MPB	-	XC9237D1BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MPC	-	XC9237D1CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MPD	-	XC9237D1DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MPE	-	XC9237D1ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MPF	-	XC9237D1FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MPH	-	XC9237D1HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MPK	-	XC9237D1KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MPL	-	XC9237D1LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MPM	-	XC9237D1MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
mQ	-	PT7M7824KTA	Vdet-IC	2.25V±1.5%, ±Reset PPO, WD	SOT-23-5	28xg	VD19	6k	Pti
mQ	ea	PT7M7824KTAE	Vdet-IC	2.25V±1.5%, ±Reset PPO, WD, Lead free	SOT-23-5	28xg	VD19	6k	Pti
MQ	-	BD5234FVE	Vdet-IC	3.4V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
MQ	-	BD5234G	Vdet-IC	3.4V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MQ	-	R1122N341A	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
MQB	-	KRC681T	Si-npn-Digi	Dual, Sw, AF-mute, 50V, 300mA, 900mW, R1=2.2k	TSV	28	TD6	6l	Kec
Mr	-	BD52E37G-M	Vdet-IC	3.7V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MR	-	BD5235FVE	Vdet-IC	3.5V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
MR	-	BD5235G	Vdet-IC	3.5V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MR	-	R1122N351A	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
MR0	-	XC9237D20CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MR1	-	XC9237D21CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MR2	-	XC9237D22CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MR3	-	XC9237D23CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MR4	-	XC9237D24CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MR5	-	XC9237D25CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MR6	-	XC9237D26CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MR7	-	XC9237D27CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MR8	-	XC9237D28CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MR9	-	XC9237D29CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MRA	-	XC9237D2ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MRB	-	KRC682T	Si-npn-Digi	Dual, Sw, AF-mute, 50V, 300mA, 900mW, R1=4.7k	TSV	28	TD6	6l	Kec
MRB	-	XC9237D2BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MRC	-	XC9237D2CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MRD	-	XC9237D2DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MRE	-	XC9237D2ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MRF	-	XC9237D2FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MRH	-	XC9237D2HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MRK	-	XC9237D2KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MRL	-	XC9237D2LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MRM	-	XC9237D2MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MS	-	BD5236FVE	Vdet-IC	3.6V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
MS	-	BD5236G	Vdet-IC	3.6V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MS	-	R1122N361A	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
MS0	-	XC9237D30CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MS1	-	XC9237D31CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MS2	-	XC9237D32CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MS3	-	XC9237D33CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MS4	-	XC9237D34CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MS5	-	XC9237D35CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MS6	-	XC9237D36CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MS7	-	XC9237D37CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MS8	-	XC9237D38CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MS9	-	XC9237D39CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MSA	-	XC9237D3ACMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MSB	-	KRC683T	Si-npn-Digi	Dual, Sw, AF-mute, 50V, 300mA, 900mW, R1=5.6k	TSV	28	TD6	6l	Kec
MSB	-	XC9237D3BCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MSC	-	XC9237D3CCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MSD	-	XC9237D3DCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MSE	-	XC9237D3ECMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MSF	-	XC9237D3FCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MSH	-	XC9237D3HCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MSK	-	XC9237D3KCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MSL	-	XC9237D3LCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MSM	-	XC9237D3MCMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MT	-	BD5237FVE	Vdet-IC	3.7V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
MT	-	BD5237G	Vdet-IC	3.7V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MT	-	R1122N371A	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
MT0	-	XC9237D40CMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MTB	-	KRC684T	Si-npn-Digi	Dual, Sw, AF-mute, 50V, 300mA, 900mW, R1=6.8k	TSV	28	TD6	6l	Kec
MU	-	BD5238FVE	Vdet-IC	3.8V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
MU	-	BD5238G	Vdet-IC	3.8V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MU	-	PT7M7018CLTA	Vdet-IC	1.8V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
MU	-	R1122N381A	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
MU	ea	PT7M7018CLTAE	Vdet-IC	1.8V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
MU8	-	XC9237D08DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MU9	-	XC9237D09DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MUB	-	KRC685T	Si-npn-Digi	Dual, Sw, AF-mute, 50V, 300mA, 900mW, R1=10k	TSV	28	TD6	6l	Kec
MUL	-	XC9237D0LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MUM	-	XC9237D0MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MV	-	BD5239FVE	Vdet-IC	3.9V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
MV	-	BD5239G	Vdet-IC	3.9V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MV	-	PT7M7018CHTA	Vdet-IC	1.8V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
MV	-	R1122N391A	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
MV	ea	PT7M7018CHTAE	Vdet-IC	1.8V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
MV0	-	XC9237D10DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MV1	-	XC9237D11DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MV2	-	XC9237D12DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MV3	-	XC9237D13DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MV4	-	XC9237D14DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MV5	-	XC9237D15DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MV6	-	XC9237D16DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MV7	-	XC9237D17DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MV8	-	XC9237D18DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MV9	-	XC9237D19DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MVA	-	XC9237D1ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MVB	-	KRC686T	Si-npn-Digi	Dual, Sw, AF-mute, 50V, 300mA, 900mW, R1=22k	TSV	28	TD6	6l	Kec
MVB	-	XC9237D1BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MVC	-	XC9237D1CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MVD	-	XC9237D1DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MVE	-	XC9237D1EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MVF	-	XC9237D1FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MVH	-	XC9237D1HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MVK	-	XC9237D1KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MVL	-	XC9237D1LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MVM	-	XC9237D1MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MW	-	BU10UB3WG	LVR-IC	LDO, 1.0V±1%, 360mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
MW	-	PT7M7018NLTA	Vdet-IC	1.8V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
MW	ea	PT7M7018NLTAE	Vdet-IC	1.8V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
MX	-	BU1BUB3WG	LVR-IC	LDO, 1.15V±1%, 360mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
MX	-	PT7M7019CLTA	Vdet-IC	1.9V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
MX	ea	PT7M7019CLTAE	Vdet-IC	1.9V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
MX0	-	XC9237D20DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MX1	-	XC9237D21DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MX2	-	XC9237D22DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MX3	-	XC9237D23DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MX4	-	XC9237D24DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MX5	-	XC9237D25DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MX6	-	XC9237D26DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MX7	-	XC9237D27DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MX8	-	XC9237D28DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MX9	-	XC9237D29DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MXA	-	XC9237D2ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MXB	-	XC9237D2BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MXC	-	XC9237D2CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MXD	-	XC9237D2DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MXE	-	XC9237D2EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MXF	-	XC9237D2FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MXH	-	XC9237D2HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MXK	-	XC9237D2KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MXL	-	XC9237D2LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MXM	-	XC9237D2MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
My	-	BD52E38G-M	Vdet-IC	3.8V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
MY	-	PT7M7019CHTA	Vdet-IC	1.9V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
MY	ea	PT7M7019CHTAE	Vdet-IC	1.9V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
MY0	-	XC9237D30DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MY1	-	XC9237D31DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MY2	-	XC9237D32DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MY3	-	XC9237D33DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MY4	-	XC9237D34DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MY5	-	XC9237D35DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MY6	-	XC9237D36DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MY7	-	XC9237D37DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MY8	-	XC9237D38DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MY9	-	XC9237D39DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MYA	-	XC9237D3ADMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MYB	-	XC9237D3BDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MYC	-	XC9237D3CDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MYD	-	XC9237D3DDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MYE	-	XC9237D3EDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MYF	-	XC9237D3FDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MYH	-	XC9237D3HDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MYK	-	XC9237D3KDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MYL	-	XC9237D3LDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MYM	-	XC9237D3MDMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
MZ	-	BU12UB3WG	LVR-IC	LDO, 1.2V±1%, 360mA, +CE	SSOP-5	28cx	VR4	6c	Rhm
MZ	-	PT7M7019NLTA	Vdet-IC	1.9V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
MZ	ea	PT7M7019NLTAE	Vdet-IC	1.9V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
MZ0	-	XC9237D40DMR-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	SOT-25	28s4	DC16	6g	Tor
N0	-	AP139-15TW	LVR-IC	LDO, LN, +CE, 1.5V±2%, 300mA	TSOT-23-5L	28vrx	VR7	6a	Ana
N0	-	AP139-15W	LVR-IC	LDO, LN, +CE, 1.5V±2%, 300mA	SOT-23-5L	28vrx	VR7	6k	Ana
N0	-	R1121N401A	LVR-IC	LDO, Low noise, 4V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
N0	-	RN5RG60AA	LVR-IC	Ext. transistor, 6V±2.5% 1A*	SOT-23-5	28vw	VR6	6g	Ric
N0	-	TC1185-4.0VRX	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
N0	ea	RN5RY501A	DC-DC-IC	VFM step-up, 5V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
N0	eu	BL8060CB5TR20	LVR-IC	LDO, 2.0V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N0	fg	BL8060CB5TR30	LVR-IC	LDO, 3.0V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N0	fh	BL8060CB5TR50	LVR-IC	LDO, 5.0V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N0	fi	BL8060CB5TR40	LVR-IC	LDO, 4.0V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N010	-	RP107Q102B	LVR-IC	LDO, 1.0V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N011	-	RP107Q112B	LVR-IC	LDO, 1.1V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N012	-	RP107Q122B	LVR-IC	LDO, 1.2V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N013	-	RP107Q132B	LVR-IC	LDO, 1.3V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N014	-	RP107Q142B	LVR-IC	LDO, 1.4V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N015	-	RP107Q152B	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N016	-	RP107Q162B	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N017	-	RP107Q172B	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N018	-	RP107Q182B	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N019	-	RP107Q192B	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N020	-	RP107Q202B	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N021	-	RP107Q212B	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N022	-	RP107Q222B	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N023	-	RP107Q232B	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N024	-	RP107Q242B	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N025	-	RP107Q252B	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N026	-	RP107Q262B	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N027	-	RP107Q272B	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N028	-	RP107Q282B	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N029	-	RP107Q292B	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N03	-	TC53N3002ECT	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
N030	-	RP107Q302B	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N031	-	RP107Q312B	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N032	-	RP107Q322B	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N033	-	RP107Q332B	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N034	-	RP107Q342B	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N035	-	RP107Q352B	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N036	-	RP107Q362B	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N037	-	RP107Q372B	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N038	-	RP107Q382B	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N039	-	RP107Q392B	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N040	-	RP107Q402B	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N041	-	RP107Q412B	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N042	-	RP107Q422B	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N043	-	RP107Q122B5	LVR-IC	LDO, 1.25V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N044	-	RP107Q182B5	LVR-IC	LDO, 1.85V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N045	-	RP107Q282B5	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	SC-88A	28xm	VR4	6ma	Ric
N08	-	RP504N081C	DC-DC-IC	PWM step-down, 0.8V±18mV, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N09	-	82N09-AF5-B	Vdet-IC	0.9V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N09	-	RP504N091C	DC-DC-IC	PWM step-down, 0.9V±18mV, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N09G	-	82N09G-AF5-B	Vdet-IC	0.9V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N09L	-	82N09L-AF5-B	Vdet-IC	0.9V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N0A	-	R3117N311A	Vdet-IC	3.1V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0A	-	XC6108N30AMR	Vdet-IC	3.0V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N0A	-	XC6118C20AMR-G	Vdet-IC	2.0V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
N0B	-	R3117N321A	Vdet-IC	3.2V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0B	-	XC6108N30BMR	Vdet-IC	3.0V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N0B	-	XC6118C20BMR-G	Vdet-IC	2.0V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
N0C	-	R3117N331A	Vdet-IC	3.3V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0C	-	XC6108N30CMR	Vdet-IC	3.0V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N0C	-	XC6118C20CMR-G	Vdet-IC	2.0V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
N0D	-	R3117N341A	Vdet-IC	3.4V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0D	-	XC6108N30DMR	Vdet-IC	3.0V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N0D	-	XC6118C20DMR-G	Vdet-IC	2.0V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
N0E	-	R3117N351A	Vdet-IC	3.5V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0F	-	R3117N361A	Vdet-IC	3.6V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0G	-	R3117N371A	Vdet-IC	3.7V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0H	-	R3117N381A	Vdet-IC	3.8V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0J	-	R3117N391A	Vdet-IC	3.9V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0K	-	R3117N401A	Vdet-IC	4.0V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0L	-	R3117N411A	Vdet-IC	4.1V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0M	-	R3117N421A	Vdet-IC	4.2V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0N	-	R3117N431A	Vdet-IC	4.3V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0P	-	R3117N441A	Vdet-IC	4.4V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0Q	-	R3117N451A	Vdet-IC	4.5V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0R	-	R3117N461A	Vdet-IC	4.6V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0S	-	R3117N471A	Vdet-IC	4.7V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0T	-	R3117N481A	Vdet-IC	4.8V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0U	-	R3117N491A	Vdet-IC	4.9V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
N0V	-	R3117N501A	Vdet-IC	5.0V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
n1	-	BD46E331G-M	Vdet-IC	3.3V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
N1	-	AP139-18TW	LVR-IC	LDO, LN, +CE, 1.8V±2%, 300mA	TSOT-23-5L	28vrx	VR7	6a	Ana
N1	-	AP139-18W	LVR-IC	LDO, LN, +CE, 1.8V±2%, 300mA	SOT-23-5L	28vrx	VR7	6k	Ana
N1	-	BL8060CB5TR11	LVR-IC	LDO, 1.1V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N1	-	R1121N411A	LVR-IC	LDO, Low noise, 4.1V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
N1	-	SiP21106DR-18-E3	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SC-70-5L	28vrx	VR7	6a	Vs
N1	-	SiP21106DT-18-E3	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	TSOT-23-5L	28vrx	VR7	6a	Vs
N1	-	TC1185-2.5VRX	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
N1	ea	RN5RY511A	DC-DC-IC	VFM step-up, 5.1V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
N1	eu	BL8060CB5TR21	LVR-IC	LDO, 2.1V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N1	fg	BL8060CB5TR31	LVR-IC	LDO, 3.1V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N1	fh	BL8060CB5TR41	LVR-IC	LDO, 4.1V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N1	fj	BL8060CB5TR51	LVR-IC	LDO, 5.1V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N10	-	82N10-AF5-B	Vdet-IC	1.0V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N10	-	RP504N101C	DC-DC-IC	PWM step-down, 1.0V±18mV, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N10	-	TC126101ECT	DC-DC-IC	PFM st-up, 1.0V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N10G	-	82N10G-AF5-B	Vdet-IC	1.0V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N10L	-	82N10L-AF5-B	Vdet-IC	1.0V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N11	-	82N11-AF5-B	Vdet-IC	1.1V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N11	-	RP504N111C	DC-DC-IC	PWM step-down, 1.1V±18mV, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N11	-	TC126111ECT	DC-DC-IC	PFM st-up, 1.1V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N110	ek	XC6366D101MR	DC-DC-IC	PWM/PFM st-down, 100kHz, Adj. 1.5..6V±2.5%, 1A, +CE, soft start	SOT-25	28zn	DC18	6g	Tor
N11G	-	82N11G-AF5-B	Vdet-IC	1.1V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N11L	-	82N11L-AF5-B	Vdet-IC	1.1V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N12	-	82N12-AF5-B	Vdet-IC	1.2V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N12	-	RP504N121C	DC-DC-IC	PWM step-down, 1.2V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N12	-	TC126121ECT	DC-DC-IC	PFM st-up, 1.2V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N12G	-	82N12G-AF5-B	Vdet-IC	1.2V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N12L	-	82N12L-AF5-B	Vdet-IC	1.2V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N13	-	82N13-AF5-B	Vdet-IC	1.3V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N13	-	RP504N131C	DC-DC-IC	PWM step-down, 1.3V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N13	-	TC126131ECT	DC-DC-IC	PFM st-up, 1.3V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N13	-	TC53N3102ECT	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
N13G	-	82N13G-AF5-B	Vdet-IC	1.3V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N13L	-	82N13L-AF5-B	Vdet-IC	1.3V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N14	-	82N14-AF5-B	Vdet-IC	1.4V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N14	-	RP504N141C	DC-DC-IC	PWM step-down, 1.4V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N14	-	TC126141ECT	DC-DC-IC	PFM st-up, 1.4V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N14G	-	82N14G-AF5-B	Vdet-IC	1.4V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N14L	-	82N14L-AF5-B	Vdet-IC	1.4V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N15	-	82N15-AF5-B	Vdet-IC	1.5V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N15	-	RP504N151C	DC-DC-IC	PWM step-down, 1.5V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N15	-	TC126151ECT	DC-DC-IC	PFM st-up, 1.5V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N15G	-	82N15G-AF5-B	Vdet-IC	1.5V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N15L	-	82N15L-AF5-B	Vdet-IC	1.5V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N16	-	82N16-AF5-B	Vdet-IC	1.6V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N16	-	RP504N161C	DC-DC-IC	PWM step-down, 1.6V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N16	-	TC126161ECT	DC-DC-IC	PFM st-up, 1.6V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N16G	-	82N16G-AF5-B	Vdet-IC	1.6V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N16L	-	82N16L-AF5-B	Vdet-IC	1.6V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N17	-	82N17-AF5-B	Vdet-IC	1.7V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N17	-	RP504N171C	DC-DC-IC	PWM step-down, 1.7V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N17	-	TC126171ECT	DC-DC-IC	PFM st-up, 1.7V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N17G	-	82N17G-AF5-B	Vdet-IC	1.7V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N17L	-	82N17L-AF5-B	Vdet-IC	1.7V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N18	-	82N18-AF5-B	Vdet-IC	1.8V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N18	-	RP504N181C	DC-DC-IC	PWM step-down, 1.8V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N18	-	TC126181ECT	DC-DC-IC	PFM st-up, 1.8V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N18G	-	82N18G-AF5-B	Vdet-IC	1.8V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N18L	-	82N18L-AF5-B	Vdet-IC	1.8V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N19	-	82N19-AF5-B	Vdet-IC	1.9V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N19	-	RP504N191C	DC-DC-IC	PWM step-down, 1.9V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N19	-	TC126191ECT	DC-DC-IC	PFM st-up, 1.9V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N19G	-	82N19G-AF5-B	Vdet-IC	1.9V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N19L	-	82N19L-AF5-B	Vdet-IC	1.9V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N1A	-	R3117N311C	Vdet-IC	3.1V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1A	-	XC6108N31AMR	Vdet-IC	3.1V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N1A	-	XC6118C21AMR-G	Vdet-IC	2.1V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
N1B	-	R3117N321C	Vdet-IC	3.2V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1B	-	XC6108N31BMR	Vdet-IC	3.1V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N1B	-	XC6118C21BMR-G	Vdet-IC	2.1V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
N1C	-	R3117N331C	Vdet-IC	3.3V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1C	-	XC6108N31CMR	Vdet-IC	3.1V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N1C	-	XC6118C21CMR-G	Vdet-IC	2.1V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
N1D	-	R3117N341C	Vdet-IC	3.4V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1D	-	XC6108N31DMR	Vdet-IC	3.1V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N1D	-	XC6118C21DMR-G	Vdet-IC	2.1V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
N1E	-	R3117N351C	Vdet-IC	3.5V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1F	-	R3117N361C	Vdet-IC	3.6V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1G	-	R3117N371C	Vdet-IC	3.7V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1H	-	R3117N381C	Vdet-IC	3.8V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1J	-	R3117N391C	Vdet-IC	3.9V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1K	-	R3117N401C	Vdet-IC	4.0V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1L	-	R3117N411C	Vdet-IC	4.1V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1M	-	R3117N421C	Vdet-IC	4.2V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1N	-	R3117N431C	Vdet-IC	4.3V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1P	-	R3117N441C	Vdet-IC	4.4V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1Q	-	R3117N451C	Vdet-IC	4.5V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1R	-	R3117N461C	Vdet-IC	4.6V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1S	-	R3117N471C	Vdet-IC	4.7V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1T	-	R3117N481C	Vdet-IC	4.8V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1U	-	R3117N491C	Vdet-IC	4.9V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
N1V	-	R3117N501C	Vdet-IC	5.0V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6ma	Ric
n2	-	BD46E341G-M	Vdet-IC	3.4V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
N2	-	AP139-20TW	LVR-IC	LDO, LN, +CE, 2.0V±2%, 300mA	TSOT-23-5L	28vrx	VR7	6a	Ana
N2	-	AP139-20W	LVR-IC	LDO, LN, +CE, 2.0V±2%, 300mA	SOT-23-5L	28vrx	VR7	6k	Ana
N2	-	BL8060CB5TR12	LVR-IC	LDO, 1.2V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N2	-	KRC666E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=1k/10k	TESV	30/TD6	TD6	6l	Kec
N2	-	KRC666U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=1k/10k	USV	28	TD9	6l	Kec





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N2	-	R1121N421A	LVR-IC	LDO, Low noise, 4.2V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
N2	-	SiP21106DR-28-E3	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SC-70-5L	28vrx	VR7	6a	Vs
N2	-	SiP21106DT-28-E3	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	TSOT-23-5L	28vrx	VR7	6a	Vs
N2	-	TC1185-2.7VRX	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
N2	ea	RN5RY521A	DC-DC-IC	VFM step-up, 5.2V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
N2	eu	BL8060CB5TR22	LVR-IC	LDO, 2.2V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N2	fg	BL8060CB5TR32	LVR-IC	LDO, 3.2V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N2	fh	BL8060CB5TR42	LVR-IC	LDO, 4.2V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N2	fj	BL8060CB5TR52	LVR-IC	LDO, 5.2V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N20	-	82N20-AF5-B	Vdet-IC	2.0V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N20	-	RP504N201C	DC-DC-IC	PWM step-down, 2.0V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N20	-	TC126201ECT	DC-DC-IC	PFM st-up, 2.0V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N20	eh	XC6382E201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N20	er	XC6385E201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N20G	-	82N20G-AF5-B	Vdet-IC	2.0V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N20L	-	82N20L-AF5-B	Vdet-IC	2.0V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N21	-	82N21-AF5-B	Vdet-IC	2.1V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N21	-	RP504N211C	DC-DC-IC	PWM step-down, 2.1V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N21	-	TC126211ECT	DC-DC-IC	PFM st-up, 2.1V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N21	eh	XC6382E211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N21	er	XC6385E211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N210	ek	XC6366D102MR	DC-DC-IC	PWM/PFM st-down, 180kHz, Adj. 1.5..6V±2.5%, 1A, +CE, soft start	SOT-25	28zn	DC18	6g	Tor
N21G	-	82N21G-AF5-B	Vdet-IC	2.1V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N21L	-	82N21L-AF5-B	Vdet-IC	2.1V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N22	-	82N22-AF5-B	Vdet-IC	2.2V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N22	-	RP504N221C	DC-DC-IC	PWM step-down, 2.2V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N22	-	TC126221ECT	DC-DC-IC	PFM st-up, 2.2V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N22	eh	XC6382E221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N22	er	XC6385E221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N22G	-	82N22G-AF5-B	Vdet-IC	2.2V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N22L	-	82N22L-AF5-B	Vdet-IC	2.2V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N23	-	82N23-AF5-B	Vdet-IC	2.3V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N23	-	RP504N231C	DC-DC-IC	PWM step-down, 2.3V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N23	-	TC126231ECT	DC-DC-IC	PFM st-up, 2.3V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N23	-	TC53N3202ECT	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
N23	eh	XC6382E231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N23	er	XC6385E231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N23G	-	82N23G-AF5-B	Vdet-IC	2.3V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N23L	-	82N23L-AF5-B	Vdet-IC	2.3V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N24	-	82N24-AF5-B	Vdet-IC	2.4V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N24	-	RP504N241C	DC-DC-IC	PWM step-down, 2.4V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N24	-	TC126241ECT	DC-DC-IC	PFM st-up, 2.4V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N24	eh	XC6382E241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N24	er	XC6385E241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N24G	-	82N24G-AF5-B	Vdet-IC	2.4V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N24L	-	82N24L-AF5-B	Vdet-IC	2.4V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N25	-	82N25-AF5-B	Vdet-IC	2.5V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N25	-	RP504N251C	DC-DC-IC	PWM step-down, 2.5V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N25	-	TC126251ECT	DC-DC-IC	PFM st-up, 2.5V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N25	eh	XC6382E251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N25	er	XC6385E251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N25G	-	82N25G-AF5-B	Vdet-IC	2.5V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N25L	-	82N25L-AF5-B	Vdet-IC	2.5V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N26	-	82N26-AF5-B	Vdet-IC	2.6V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N26	-	RP504N261C	DC-DC-IC	PWM step-down, 2.6V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N26	-	TC126261ECT	DC-DC-IC	PFM st-up, 2.6V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N26	eh	XC6382E261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N26	er	XC6385E261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N26G	-	82N26G-AF5-B	Vdet-IC	2.6V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N26L	-	82N26L-AF5-B	Vdet-IC	2.6V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N27	-	82N27-AF5-B	Vdet-IC	2.7V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N27	-	RP504N271C	DC-DC-IC	PWM step-down, 2.7V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N27	-	TC126271ECT	DC-DC-IC	PFM st-up, 2.7V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N27	eh	XC6382E271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N27	er	XC6385E271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N27G	-	82N27G-AF5-B	Vdet-IC	2.7V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N27L	-	82N27L-AF5-B	Vdet-IC	2.7V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N28	-	82N28-AF5-B	Vdet-IC	2.8V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N28	-	RP504N281C	DC-DC-IC	PWM step-down, 2.8V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N28	-	TC126281ECT	DC-DC-IC	PFM st-up, 2.8V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N28	eh	XC6382E281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N28	er	XC6385E281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N28G	-	82N28G-AF5-B	Vdet-IC	2.8V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N28L	-	82N28L-AF5-B	Vdet-IC	2.8V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N29	-	82N29-AF5-B	Vdet-IC	2.9V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N29	-	RP504N291C	DC-DC-IC	PWM step-down, 2.9V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N29	-	TC126291ECT	DC-DC-IC	PFM st-up, 2.9V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N29	eh	XC6382E291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N29	er	XC6385E291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N29G	-	82N29G-AF5-B	Vdet-IC	2.9V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N29L	-	82N29L-AF5-B	Vdet-IC	2.9V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N2A	-	S-1121B15MC-N2ATFG	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2A	-	S-1121B15PN-N2ATFG	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2A	-	XC6108N32AMR	Vdet-IC	3.2V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N2A	-	XC6118C22AMR-G	Vdet-IC	2.2V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
N2B	-	S-1121B16MC-N2BTFG	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2B	-	S-1121B16PN-N2BTFG	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2B	-	XC6108N32BMR	Vdet-IC	3.2V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N2B	-	XC6118C22BMR-G	Vdet-IC	2.2V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
N2C	-	S-1121B17MC-N2CTFG	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2C	-	S-1121B17PN-N2CTFG	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2C	-	XC6108N32CMR	Vdet-IC	3.2V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N2C	-	XC6118C22CMR-G	Vdet-IC	2.2V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
N2D	-	S-1121B18MC-N2DTFG	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2D	-	S-1121B18PN-N2DTFG	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2D	-	XC6108N32DMR	Vdet-IC	3.2V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N2D	-	XC6118C22DMR-G	Vdet-IC	2.2V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
N2E	-	S-1121B19MC-N2ETFG	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2E	-	S-1121B19PN-N2ETFG	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2F	-	S-1121B20MC-N2FTFG	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2F	-	S-1121B20PN-N2FTFG	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2G	-	S-1121B21MC-N2GTFG	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2G	-	S-1121B21PN-N2GTFG	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2H	-	S-1121B22MC-N2HTFG	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2H	-	S-1121B22PN-N2HTFG	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2I	-	S-1121B23MC-N2ITFG	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2I	-	S-1121B23PN-N2ITFG	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2J	-	S-1121B24MC-N2JTFG	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2J	-	S-1121B24PN-N2JTFG	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2K	-	S-1121B25MC-N2KTFG	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2K	-	S-1121B25PN-N2KTFG	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2L	-	S-1121B26MC-N2LTFG	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2L	-	S-1121B26PN-N2LTFG	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2M	-	S-1121B27MC-N2MTFG	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2M	-	S-1121B27PN-N2MTFG	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2N	-	S-1121B28MC-N2NTFG	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2N	-	S-1121B28PN-N2NTFG	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2O	-	S-1121B29MC-N2OTFG	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2O	-	S-1121B29PN-N2OTFG	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2P	-	S-1121B30MC-N2PTFG	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2P	-	S-1121B30PN-N2PTFG	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2Q	-	S-1121B31MC-N2QTFG	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2Q	-	S-1121B31PN-N2QTFG	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2R	-	S-1121B32MC-N2RTFG	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2R	-	S-1121B32PN-N2RTFG	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2S	-	S-1121B33MC-N2STFG	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2S	-	S-1121B33PN-N2STFG	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2T	-	S-1121B34MC-N2TTFG	LVR-IC	LDO, 3.4V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2T	-	S-1121B34PN-N2TTFG	LVR-IC	LDO, 3.4V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2U	-	S-1121B35MC-N2UTFG	LVR-IC	LDO, 3.5V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2U	-	S-1121B35PN-N2UTFG	LVR-IC	LDO, 3.5V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2V	-	S-1121B36MC-N2VTFG	LVR-IC	LDO, 3.6V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2V	-	S-1121B36PN-N2VTFG	LVR-IC	LDO, 3.6V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2W	-	S-1121B37MC-N2WTFG	LVR-IC	LDO, 3.7V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2W	-	S-1121B37PN-N2WTFG	LVR-IC	LDO, 3.7V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2X	-	S-1121B38MC-N2XTFG	LVR-IC	LDO, 3.8V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2X	-	S-1121B38PN-N2XTFG	LVR-IC	LDO, 3.8V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2Y	-	S-1121B39MC-N2YTFG	LVR-IC	LDO, 3.9V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N2Y	-	S-1121B39PN-N2YTFG	LVR-IC	LDO, 3.9V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N2Z	-	S-1121B40MC-N2ZTFG	LVR-IC	LDO, 4.0V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N2Z	-	S-1121B40PN-N2ZTFG	LVR-IC	LDO, 4.0V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
n3	-	BD46E351G-M	Vdet-IC	3.5V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
N3	-	AP139-25TW	LVR-IC	LDO, LN, +CE, 2.5V±2%, 300mA	TSOT-23-5L	28vrx	VR7	6a	Ana
N3	-	AP139-25W	LVR-IC	LDO, LN, +CE, 2.5V±2%, 300mA	SOT-23-5L	28vrx	VR7	6k	Ana
N3	-	BL8060CB5TR13	LVR-IC	LDO, 1.3V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N3	-	R1121N431A	LVR-IC	LDO, Low noise, 4.3V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
N3	-	SiP21106DR-33-E3	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SC-70-5L	28vrx	VR7	6a	Vs
N3	-	SiP21106DT-33-E3	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	TSOT-23-5L	28vrx	VR7	6a	Vs
N3	-	TC1185-3.0VRX	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
N3	ea	RN5RY531A	DC-DC-IC	VFM step-up, 5.3V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
N3	eu	BL8060CB5TR23	LVR-IC	LDO, 2.3V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N3	fg	BL8060CB5TR33	LVR-IC	LDO, 3.3V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N3	fh	BL8060CB5TR43	LVR-IC	LDO, 4.3V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N3	fj	BL8060CB5TR53	LVR-IC	LDO, 5.3V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N30	-	82N30-AF5-B	Vdet-IC	3.0V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N30	-	RP504N301C	DC-DC-IC	PWM step-down, 3.0V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N30	-	TC126301ECT	DC-DC-IC	PFM st-up, 3.0V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N30	eh	XC6382E301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N30	er	XC6385E301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N30G	-	82N30G-AF5-B	Vdet-IC	3.0V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N30L	-	82N30L-AF5-B	Vdet-IC	3.0V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N31	-	82N31-AF5-B	Vdet-IC	3.1V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N31	-	RP504N311C	DC-DC-IC	PWM step-down, 3.1V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N31	-	TC126311ECT	DC-DC-IC	PFM st-up, 3.1V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N31	eh	XC6382E311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N31	er	XC6385E311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N310	ek	XC6366D103MR	DC-DC-IC	PWM/PFM st-down, 300kHz, Adj. 1.5..6V±2.5%, 1A, +CE, soft start	SOT-25	28zn	DC18	6g	Tor
N31G	-	82N31G-AF5-B	Vdet-IC	3.1V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N31L	-	82N31L-AF5-B	Vdet-IC	3.1V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N32	-	82N32-AF5-B	Vdet-IC	3.2V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N32	-	RP504N321C	DC-DC-IC	PWM step-down, 3.2V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N32	-	TC126321ECT	DC-DC-IC	PFM st-up, 3.2V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N32	eh	XC6382E321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N32	er	XC6385E321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N32G	-	82N32G-AF5-B	Vdet-IC	3.2V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N32L	-	82N32L-AF5-B	Vdet-IC	3.2V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N33	-	82N33-AF5-B	Vdet-IC	3.3V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N33	-	RP504N331C	DC-DC-IC	PWM step-down, 3.3V±1.5%, 600mA, 2.25MHz, +CE	SOT-23-5	28gq	DC20	6k	Ric
N33	-	TC126331ECT	DC-DC-IC	PFM st-up, 3.3V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N33	-	TC53N3302ECT	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
N33	eh	XC6382E331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N33	er	XC6385E331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N33G	-	82N33G-AF5-B	Vdet-IC	3.3V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N33L	-	82N33L-AF5-B	Vdet-IC	3.3V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N34	-	82N34-AF5-B	Vdet-IC	3.4V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N34	-	TC126341ECT	DC-DC-IC	PFM st-up, 3.4V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N34	eh	XC6382E341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N34	er	XC6385E341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N34G	-	82N34G-AF5-B	Vdet-IC	3.4V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N34L	-	82N34L-AF5-B	Vdet-IC	3.4V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N35	-	82N35-AF5-B	Vdet-IC	3.5V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N35	-	TC126351ECT	DC-DC-IC	PFM st-up, 3.5V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N35	eh	XC6382E351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N35	er	XC6385E351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N35G	-	82N35G-AF5-B	Vdet-IC	3.5V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N35L	-	82N35L-AF5-B	Vdet-IC	3.5V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N36	-	82N36-AF5-B	Vdet-IC	3.6V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N36	-	TC126361ECT	DC-DC-IC	PFM st-up, 3.6V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N36	eh	XC6382E361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N36	er	XC6385E361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N36G	-	82N36G-AF5-B	Vdet-IC	3.6V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N36L	-	82N36L-AF5-B	Vdet-IC	3.6V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N37	-	82N37-AF5-B	Vdet-IC	3.7V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N37	-	TC126371ECT	DC-DC-IC	PFM st-up, 3.7V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N37	eh	XC6382E371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N37	er	XC6385E371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N37G	-	82N37G-AF5-B	Vdet-IC	3.7V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N37L	-	82N37L-AF5-B	Vdet-IC	3.7V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N38	-	82N38-AF5-B	Vdet-IC	3.8V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N38	-	TC126381ECT	DC-DC-IC	PFM st-up, 3.8V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N38	eh	XC6382E381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N38	er	XC6385E381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N38G	-	82N38G-AF5-B	Vdet-IC	3.8V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N38L	-	82N38L-AF5-B	Vdet-IC	3.8V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N39	-	82N39-AF5-B	Vdet-IC	3.9V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N39	-	TC126391ECT	DC-DC-IC	PFM st-up, 3.9V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N39	eh	XC6382E391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N39	er	XC6385E391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N39G	-	82N39G-AF5-B	Vdet-IC	3.9V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N39L	-	82N39L-AF5-B	Vdet-IC	3.9V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N3A	-	S-1121B41MC-N3ATFG	LVR-IC	LDO, 4.1V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N3A	-	S-1121B41PN-N3ATFG	LVR-IC	LDO, 4.1V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N3A	-	XC6108N33AMR	Vdet-IC	3.3V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N3A	-	XC6118C23AMR-G	Vdet-IC	2.3V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
N3B	-	S-1121B42MC-N3BTFG	LVR-IC	LDO, 4.2V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N3B	-	S-1121B42PN-N3BTFG	LVR-IC	LDO, 4.2V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N3B	-	XC6108N33BMR	Vdet-IC	3.3V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N3B	-	XC6118C23BMR-G	Vdet-IC	2.3V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
N3C	-	S-1121B43MC-N3CTFG	LVR-IC	LDO, 4.3V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N3C	-	S-1121B43PN-N3CTFG	LVR-IC	LDO, 4.3V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N3C	-	XC6108N33CMR	Vdet-IC	3.3V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N3C	-	XC6118C23CMR-G	Vdet-IC	2.3V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
N3D	-	S-1121B44MC-N3DTFG	LVR-IC	LDO, 4.4V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N3D	-	S-1121B44PN-N3DTFG	LVR-IC	LDO, 4.4V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N3D	-	XC6108N33DMR	Vdet-IC	3.3V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N3D	-	XC6118C23DMR-G	Vdet-IC	2.3V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
N3E	-	S-1121B45MC-N3ETFG	LVR-IC	LDO, 4.5V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N3E	-	S-1121B45PN-N3ETFG	LVR-IC	LDO, 4.5V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N3F	-	S-1121B46MC-N3FTFG	LVR-IC	LDO, 4.6V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N3F	-	S-1121B46PN-N3FTFG	LVR-IC	LDO, 4.6V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N3G	-	S-1121B47MC-N3GTFG	LVR-IC	LDO, 4.7V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N3G	-	S-1121B47PN-N3GTFG	LVR-IC	LDO, 4.7V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N3H	-	S-1121B48MC-N3HTFG	LVR-IC	LDO, 4.8V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N3H	-	S-1121B48PN-N3HTFG	LVR-IC	LDO, 4.8V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N3I	-	S-1121B49MC-N3ITFG	LVR-IC	LDO, 4.9V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N3I	-	S-1121B49PN-N3ITFG	LVR-IC	LDO, 4.9V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N3J	-	S-1121B50MC-N3JTFG	LVR-IC	LDO, 5.0V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N3J	-	S-1121B50PN-N3JTFG	LVR-IC	LDO, 5.0V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N3K	-	S-1121B51MC-N3KTFG	LVR-IC	LDO, 5.1V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N3K	-	S-1121B51PN-N3KTFG	LVR-IC	LDO, 5.1V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N3L	-	S-1121B52MC-N3LTFG	LVR-IC	LDO, 5.2V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N3L	-	S-1121B52PN-N3LTFG	LVR-IC	LDO, 5.2V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N3M	-	S-1121B53MC-N3MTFG	LVR-IC	LDO, 5.3V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N3M	-	S-1121B53PN-N3MTFG	LVR-IC	LDO, 5.3V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N3N	-	S-1121B54MC-N3NTFG	LVR-IC	LDO, 5.4V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N3N	-	S-1121B54PN-N3NTFG	LVR-IC	LDO, 5.4V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N3O	-	S-1121B55MC-N3OTFG	LVR-IC	LDO, 5.5V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
N3O	-	S-1121B55PN-N3OTFG	LVR-IC	LDO, 5.5V±1.0%, 150mA, +CE	SON-5	30vr4	VR4	6a	Sii
N3P	-	S-1121B4HMC-N3PTFG	LVR-IC	LDO, 4.75V±1.0%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Sii
n4	-	BD46E361G-M	Vdet-IC	3.6V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
N4	-	AP139-28TW	LVR-IC	LDO, LN, +CE, 2.8V±2%, 300mA	TSOT-23-5L	28vrx	VR7	6a	Ana
N4	-	AP139-28W	LVR-IC	LDO, LN, +CE, 2.8V±2%, 300mA	SOT-23-5L	28vrx	VR7	6k	Ana
N4	-	BL8060CB5TR14	LVR-IC	LDO, 1.4V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N4	-	KRC667E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	TESV	30/TD6	TD6	6l	Kec
N4	-	KRC667U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	USV	28	TD9	6l	Kec
N4	-	R1121N441A	LVR-IC	LDO, Low noise, 4.4V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
N4	-	SiP21106DR-46-E3	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	SC-70-5L	28vrx	VR7	6a	Vs
N4	-	SiP21106DT-46-E3	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	TSOT-23-5L	28vrx	VR7	6a	Vs
N4	ea	RN5RY541A	DC-DC-IC	VFM step-up, 5.4V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
N4	eu	BL8060CB5TR24	LVR-IC	LDO, 2.4V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N4	fg	BL8060CB5TR34	LVR-IC	LDO, 3.4V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N4	fh	BL8060CB5TR44	LVR-IC	LDO, 4.4V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N4	fj	BL8060CB5TR54	LVR-IC	LDO, 5.4V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N40	-	82N40-AF5-B	Vdet-IC	4.0V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N40	-	TC126401ECT	DC-DC-IC	PFM st-up, 4.0V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N40	eh	XC6382E401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N40	er	XC6385E401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N40G	-	82N40G-AF5-B	Vdet-IC	4.0V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N40L	-	82N40L-AF5-B	Vdet-IC	4.0V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N41	-	82N41-AF5-B	Vdet-IC	4.1V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N41	-	TC126411ECT	DC-DC-IC	PFM st-up, 4.1V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N41	eh	XC6382E411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N41	er	XC6385E411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N410	-	MIC5238-1.0BD5	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	TSOT-23-5	28ze	VR11	6g	Mcr
N410	ek	XC6366D104MR	DC-DC-IC	PWM/PFM st-down, 500kHz, Adj. 1.5..6V±2.5%, 1A, +CE, soft start	SOT-25	28zn	DC18	6g	Tor
N410	fb	MIC5238-1.0YD5	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, Pb-Free	TSOT-23-5	28ze	VR11	6g	Mcr
N411	-	MIC5238-1.1BD5	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	TSOT-23-5	28ze	VR11	6g	Mcr
N411	fb	MIC5238-1.1YD5	LVR-IC	LDO, 1.1V±2%, 150mA, +CE, Pb-Free	TSOT-23-5	28ze	VR11	6g	Mcr
N413	-	MIC5238-1.3BD5	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	TSOT-23-5	28ze	VR11	6g	Mcr
N413	fb	MIC5238-1.3YD5	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, Pb-Free	TSOT-23-5	28ze	VR11	6g	Mcr
N41G	-	82N41G-AF5-B	Vdet-IC	4.1V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N41L	-	82N41L-AF5-B	Vdet-IC	4.1V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N42	-	82N42-AF5-B	Vdet-IC	4.2V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N42	-	TC126421ECT	DC-DC-IC	PFM st-up, 4.2V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N42	eh	XC6382E421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N42	er	XC6385E421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N42G	-	82N42G-AF5-B	Vdet-IC	4.2V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N42L	-	82N42L-AF5-B	Vdet-IC	4.2V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N43	-	82N43-AF5-B	Vdet-IC	4.3V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N43	-	TC126431ECT	DC-DC-IC	PFM st-up, 4.3V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N43	-	TC53N3402ECT	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
N43	eh	XC6382E431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N43	er	XC6385E431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N43G	-	82N43G-AF5-B	Vdet-IC	4.3V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N43L	-	82N43L-AF5-B	Vdet-IC	4.3V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N44	-	82N44-AF5-B	Vdet-IC	4.4V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N44	-	TC126441ECT	DC-DC-IC	PFM st-up, 4.4V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N44	eh	XC6382E441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N44	er	XC6385E441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N44G	-	82N44G-AF5-B	Vdet-IC	4.4V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N44L	-	82N44L-AF5-B	Vdet-IC	4.4V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N45	-	82N45-AF5-B	Vdet-IC	4.5V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N45	-	TC126451ECT	DC-DC-IC	PFM st-up, 4.5V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N45	eh	XC6382E451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N45	er	XC6385E451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N45G	-	82N45G-AF5-B	Vdet-IC	4.5V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N45L	-	82N45L-AF5-B	Vdet-IC	4.5V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N46	-	82N46-AF5-B	Vdet-IC	4.6V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N46	-	TC126461ECT	DC-DC-IC	PFM st-up, 4.6V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N46	eh	XC6382E461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N46	er	XC6385E461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N46G	-	82N46G-AF5-B	Vdet-IC	4.6V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N46L	-	82N46L-AF5-B	Vdet-IC	4.6V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N47	-	82N47-AF5-B	Vdet-IC	4.7V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N47	-	TC126471ECT	DC-DC-IC	PFM st-up, 4.7V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N47	eh	XC6382E471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N47	er	XC6385E471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N47G	-	82N47G-AF5-B	Vdet-IC	4.7V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N47L	-	82N47L-AF5-B	Vdet-IC	4.7V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N48	-	82N48-AF5-B	Vdet-IC	4.8V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N48	-	TC126481ECT	DC-DC-IC	PFM st-up, 4.8V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N48	eh	XC6382E481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N48	er	XC6385E481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N48G	-	82N48G-AF5-B	Vdet-IC	4.8V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N48L	-	82N48L-AF5-B	Vdet-IC	4.8V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N49	-	82N49-AF5-B	Vdet-IC	4.9V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N49	-	TC126491ECT	DC-DC-IC	PFM st-up, 4.9V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N49	eh	XC6382E491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N49	er	XC6385E491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N49G	-	82N49G-AF5-B	Vdet-IC	4.9V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N49L	-	82N49L-AF5-B	Vdet-IC	4.9V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N4A	-	XC6108N34AMR	Vdet-IC	3.4V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N4A	-	XC6118C24AMR-G	Vdet-IC	2.4V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
N4B	-	XC6108N34BMR	Vdet-IC	3.4V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N4B	-	XC6118C24BMR-G	Vdet-IC	2.4V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
N4C	-	XC6108N34CMR	Vdet-IC	3.4V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N4C	-	XC6118C24CMR-G	Vdet-IC	2.4V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
N4D	-	XC6108N34DMR	Vdet-IC	3.4V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N4D	-	XC6118C24DMR-G	Vdet-IC	2.4V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
n5	-	BD46E371G-M	Vdet-IC	3.7V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N5	-	AP139-30TW	LVR-IC	LDO, LN, 3.0V±2%, 300mA, +CE	TSOT-23-5L	28vrx	VR7	6a	Ana
N5	-	AP139-30W	LVR-IC	LDO, LN, 3.0V±2%, 300mA, +CE	SOT-23-5L	28vrx	VR7	6k	Ana
N5	-	BL8060CB5TR15	LVR-IC	LDO, 1.5V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N5	-	KRC668E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	TESV	30/TD6	TD6	6l	Kec
N5	-	KRC668U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	USV	28	TD9	6l	Kec
N5	-	R1121N451A	LVR-IC	LDO, Low noise, 4.5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
N5	-	SiP21107DR-18-E3	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, -Error	SC-70-5L	28w	VR17	6a	Vs
N5	-	SiP21107DT-18-E3	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, -Error	TSOT-23-5L	28w	VR17	6a	Vs
N5	-	TC1185-3.3VRX	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
N5	ea	RN5RY551A	DC-DC-IC	VFM step-up, 5.5V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
N5	eu	BL8060CB5TR25	LVR-IC	LDO, 2.5V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N5	fg	BL8060CB5TR35	LVR-IC	LDO, 3.5V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N5	fh	BL8060CB5TR45	LVR-IC	LDO, 4.5V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N5	fj	BL8060CB5TR55	LVR-IC	LDO, 5.5V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N50	-	82N50-AF5-B	Vdet-IC	5.0V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N50	-	TC126501ECT	DC-DC-IC	PFM st-up, 5.0V±2.5%, 80mA, 100kHz, Sense	SOT-23-5	28c2	DC21	6g	Mcc
N50	eh	XC6382E501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N50	er	XC6385E501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N50G	-	82N50G-AF5-B	Vdet-IC	5.0V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N50L	-	82N50L-AF5-B	Vdet-IC	5.0V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N51	-	82N51-AF5-B	Vdet-IC	5.1V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N51	eh	XC6382E511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N51	er	XC6385E511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N51G	-	82N51G-AF5-B	Vdet-IC	5.1V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N51L	-	82N51L-AF5-B	Vdet-IC	5.1V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N52	-	82N52-AF5-B	Vdet-IC	5.2V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N52	eh	XC6382E521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N52	er	XC6385E521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N52G	-	82N52G-AF5-B	Vdet-IC	5.2V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N52L	-	82N52L-AF5-B	Vdet-IC	5.2V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N53	-	82N53-AF5-B	Vdet-IC	5.3V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N53	-	TC53N3502ECT	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
N53	eh	XC6382E531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N53	er	XC6385E531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N53G	-	82N53G-AF5-B	Vdet-IC	5.3V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N53L	-	82N53L-AF5-B	Vdet-IC	5.3V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N54	-	82N54-AF5-B	Vdet-IC	5.4V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N54	eh	XC6382E541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N54	er	XC6385E541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N54G	-	82N54G-AF5-B	Vdet-IC	5.4V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N54L	-	82N54L-AF5-B	Vdet-IC	5.4V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N55	-	82N55-AF5-B	Vdet-IC	5.5V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N55	eh	XC6382E551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N55	er	XC6385E551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N55G	-	82N55G-AF5-B	Vdet-IC	5.5V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N55L	-	82N55L-AF5-B	Vdet-IC	5.5V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N56	-	82N56-AF5-B	Vdet-IC	5.6V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N56	eh	XC6382E561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N56	er	XC6385E561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N56G	-	82N56G-AF5-B	Vdet-IC	5.6V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N56L	-	82N56L-AF5-B	Vdet-IC	5.6V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N57	-	82N57-AF5-B	Vdet-IC	5.7V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N57	eh	XC6382E571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N57	er	XC6385E571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N57G	-	82N57G-AF5-B	Vdet-IC	5.7V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N57L	-	82N57L-AF5-B	Vdet-IC	5.7V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N58	-	82N58-AF5-B	Vdet-IC	5.8V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N58	eh	XC6382E581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N58	er	XC6385E581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N58G	-	82N58G-AF5-B	Vdet-IC	5.8V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N58L	-	82N58L-AF5-B	Vdet-IC	5.8V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N59	-	82N59-AF5-B	Vdet-IC	5.9V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N59	eh	XC6382E591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N59	er	XC6385E591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N59G	-	82N59G-AF5-B	Vdet-IC	5.9V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N59L	-	82N59L-AF5-B	Vdet-IC	5.9V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N5A	-	XC6108N35AMR	Vdet-IC	3.5V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N5A	-	XC6118C25AMR-G	Vdet-IC	2.5V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
N5B	-	XC6108N35BMR	Vdet-IC	3.5V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N5B	-	XC6118C25BMR-G	Vdet-IC	2.5V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N5C	-	XC6108N35CMR	Vdet-IC	3.5V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N5C	-	XC6118C25CMR-G	Vdet-IC	2.5V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
N5D	-	XC6108N35DMR	Vdet-IC	3.5V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N5D	-	XC6118C25DMR-G	Vdet-IC	2.5V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
n6	-	BD46E381G-M	Vdet-IC	3.8V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
N6	-	AP139-33TW	LVR-IC	LDO, LN, +CE, 3.3V±2%, 300mA	TSOT-23-5L	28vrx	VR7	6a	Ana
N6	-	AP139-33W	LVR-IC	LDO, LN, +CE, 3.3V±2%, 300mA	SOT-23-5L	28vrx	VR7	6k	Ana
N6	-	BL8060CB5TR16	LVR-IC	LDO, 1.6V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N6	-	KRC669E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	TESV	30/TD6	TD6	6l	Kec
N6	-	KRC669U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	USV	28	TD9	6l	Kec
N6	-	R1121N461A	LVR-IC	LDO, Low noise, 4.6V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
N6	-	SiP21107DR-28-E3	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, -Error	SC-70-5L	28w	VR17	6a	Vs
N6	-	SiP21107DT-28-E3	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, -Error	TSOT-23-5L	28w	VR17	6a	Vs
N6	ea	RN5RY561A	DC-DC-IC	VFM step-up, 5.6V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
N6	eu	BL8060CB5TR26	LVR-IC	LDO, 2.6V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N6	fg	BL8060CB5TR36	LVR-IC	LDO, 3.6V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N6	fh	BL8060CB5TR46	LVR-IC	LDO, 4.6V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N60	-	82N60-AF5-B	Vdet-IC	6.0V±2% -Reset ODO	SOT-23-5	28vdm	VD6	6a	Utc
N60	eh	XC6382E601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N60	er	XC6385E601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N609	-	BL8506-09NRN	Vdet-IC	0.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N609	-	LC9006CB5TR09N	Vdet-IC	0.9V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N60G	-	82N60G-AF5-B	Vdet-IC	6.0V±2% -Reset ODO, halogen free	SOT-23-5	28vdm	VD6	6a	Utc
N60L	-	82N60L-AF5-B	Vdet-IC	6.0V±2% -Reset ODO, lead free	SOT-23-5	28vdm	VD6	6a	Utc
N61	eh	XC6382E611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N61	er	XC6385E611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N610	-	BL8506-10NRN	Vdet-IC	1.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N610	-	LC9006CB5TR10N	Vdet-IC	1.0V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N611	-	BL8506-11NRN	Vdet-IC	1.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N611	-	LC9006CB5TR11N	Vdet-IC	1.1V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N612	-	BL8506-12NRN	Vdet-IC	1.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N612	-	LC9006CB5TR12N	Vdet-IC	1.2V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N613	-	BL8506-13NRN	Vdet-IC	1.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N613	-	LC9006CB5TR13N	Vdet-IC	1.3V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N614	-	BL8506-14NRN	Vdet-IC	1.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N614	-	LC9006CB5TR14N	Vdet-IC	1.4V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N615	-	BL8506-15NRN	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N615	-	LC9006CB5TR15N	Vdet-IC	1.5V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N616	-	BL8506-16NRN	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N616	-	LC9006CB5TR16N	Vdet-IC	1.6V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N617	-	BL8506-17NRN	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N617	-	LC9006CB5TR17N	Vdet-IC	1.7V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N618	-	BL8506-18NRN	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N618	-	LC9006CB5TR18N	Vdet-IC	1.8V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N619	-	BL8506-19NRN	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N619	-	LC9006CB5TR19N	Vdet-IC	1.9V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N62	eh	XC6382E621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N62	er	XC6385E621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N620	-	BL8506-20NRN	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N620	-	LC9006CB5TR20N	Vdet-IC	2.0V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N621	-	BL8506-21NRN	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N621	-	LC9006CB5TR21N	Vdet-IC	2.1V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N622	-	BL8506-22NRN	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N622	-	LC9006CB5TR22N	Vdet-IC	2.2V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N623	-	BL8506-23NRN	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N623	-	LC9006CB5TR23N	Vdet-IC	2.3V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N624	-	BL8506-24NRN	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N624	-	LC9006CB5TR24N	Vdet-IC	2.4V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N625	-	BL8506-25NRN	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N625	-	LC9006CB5TR25N	Vdet-IC	2.5V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N626	-	BL8506-26NRN	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N626	-	LC9006CB5TR26N	Vdet-IC	2.6V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N627	-	BL8506-27NRN	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N627	-	LC9006CB5TR27N	Vdet-IC	2.7V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N628	-	BL8506-28NRN	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N628	-	LC9006CB5TR28N	Vdet-IC	2.8V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N629	-	BL8506-29NRN	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N629	-	LC9006CB5TR29N	Vdet-IC	2.9V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N63	-	TC53N3602ECT	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
N63	eh	XC6382E631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N63	er	XC6385E631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N630	-	BL8506-30NRN	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N630	-	LC9006CB5TR30N	Vdet-IC	3.0V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N631	-	BL8506-31NRN	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N631	-	LC9006CB5TR31N	Vdet-IC	3.1V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N632	-	BL8506-32NRN	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N632	-	LC9006CB5TR32N	Vdet-IC	3.2V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N633	-	BL8506-33NRN	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N633	-	LC9006CB5TR33N	Vdet-IC	3.3V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N634	-	BL8506-34NRN	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N634	-	LC9006CB5TR34N	Vdet-IC	3.4V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N635	-	BL8506-35NRN	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N635	-	LC9006CB5TR35N	Vdet-IC	3.5V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N636	-	BL8506-36NRN	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N636	-	LC9006CB5TR36N	Vdet-IC	3.6V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N637	-	BL8506-37NRN	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N637	-	LC9006CB5TR37N	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N638	-	BL8506-38NRN	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N638	-	LC9006CB5TR38N	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N639	-	BL8506-39NRN	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N639	-	LC9006CB5TR39N	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N64	eh	XC6382E641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N64	er	XC6385E641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N640	-	BL8506-40NRN	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N640	-	LC9006CB5TR40N	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N641	-	BL8506-41NRN	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N641	-	LC9006CB5TR41N	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N642	-	BL8506-42NRN	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N642	-	LC9006CB5TR42N	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N643	-	BL8506-43NRN	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N643	-	LC9006CB5TR43N	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N644	-	BL8506-44NRN	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N644	-	LC9006CB5TR44N	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N645	-	BL8506-45NRN	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N645	-	LC9006CB5TR45N	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N646	-	BL8506-46NRN	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N646	-	LC9006CB5TR46N	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N647	-	BL8506-47NRN	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N647	-	LC9006CB5TR47N	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N648	-	BL8506-48NRN	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N648	-	LC9006CB5TR48N	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N649	-	BL8506-49NRN	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N649	-	LC9006CB5TR49N	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N65	eh	XC6382E651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N65	er	XC6385E651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N650	-	BL8506-50NRN	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N650	-	LC9006CB5TR50N	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N651	-	BL8506-51NRN	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N651	-	LC9006CB5TR51N	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N652	-	BL8506-52NRN	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N652	-	LC9006CB5TR52N	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N653	-	BL8506-53NRN	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N653	-	LC9006CB5TR53N	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N654	-	BL8506-54NRN	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N654	-	LC9006CB5TR54N	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N655	-	BL8506-55NRN	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N655	-	LC9006CB5TR55N	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N656	-	BL8506-56NRN	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N656	-	LC9006CB5TR56N	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N657	-	BL8506-57NRN	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N657	-	LC9006CB5TR57N	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N658	-	BL8506-58NRN	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N658	-	LC9006CB5TR58N	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N659	-	BL8506-59NRN	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N659	-	LC9006CB5TR59N	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N66	eh	XC6382E661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N66	er	XC6385E661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N660	-	BL8506-60NRN	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Shb
N660	-	LC9006CB5TR60N	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6a	Lch
N67	eh	XC6382E671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N67	er	XC6385E671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N68	eh	XC6382E681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N68	er	XC6385E681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N69	eh	XC6382E691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N69	er	XC6385E691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N6A	-	S-1165B15MC-N6ATF	LVR-IC	LDO, 1.5V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6A	-	XC6108N36AMR	Vdet-IC	3.6V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N6A	-	XC6118C26AMR-G	Vdet-IC	2.6V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
N6B	-	S-1165B16MC-N6BTF	LVR-IC	LDO, 1.6V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6B	-	XC6108N36BMR	Vdet-IC	3.6V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N6B	-	XC6118C26BMR-G	Vdet-IC	2.6V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
N6C	-	S-1165B17MC-N6CTF	LVR-IC	LDO, 1.7V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6C	-	XC6108N36CMR	Vdet-IC	3.6V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N6C	-	XC6118C26CMR-G	Vdet-IC	2.6V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
N6D	-	S-1165B18MC-N6DTF	LVR-IC	LDO, 1.8V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6D	-	XC6108N36DMR	Vdet-IC	3.6V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N6D	-	XC6118C26DMR-G	Vdet-IC	2.6V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
N6E	-	S-1165B19MC-N6ETF	LVR-IC	LDO, 1.9V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6F	-	S-1165B20MC-N6FTF	LVR-IC	LDO, 2.0V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6G	-	S-1165B21MC-N6GTF	LVR-IC	LDO, 2.1V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6H	-	S-1165B22MC-N6HTF	LVR-IC	LDO, 2.2V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6I	-	S-1165B23MC-N6ITF	LVR-IC	LDO, 2.3V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6J	-	S-1165B24MC-N6JTF	LVR-IC	LDO, 2.4V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6K	-	S-1165B25MC-N6KTF	LVR-IC	LDO, 2.5V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6L	-	S-1165B26MC-N6LTF	LVR-IC	LDO, 2.6V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6M	-	S-1165B27MC-N6MTF	LVR-IC	LDO, 2.7V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6N	-	S-1165B28MC-N6NTF	LVR-IC	LDO, 2.8V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6O	-	S-1165B29MC-N6OTF	LVR-IC	LDO, 2.9V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6P	-	S-1165B30MC-N6PTF	LVR-IC	LDO, 3.0V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6Q	-	S-1165B31MC-N6QTF	LVR-IC	LDO, 3.1V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6R	-	S-1165B32MC-N6RTF	LVR-IC	LDO, 3.2V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6S	-	S-1165B33MC-N6STF	LVR-IC	LDO, 3.3V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6T	-	S-1165B34MC-N6TTF	LVR-IC	LDO, 3.4V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6U	-	S-1165B35MC-N6UTF	LVR-IC	LDO, 3.5V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6V	-	S-1165B36MC-N6VTF	LVR-IC	LDO, 3.3V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6W	-	S-1165B37MC-N6WTF	LVR-IC	LDO, 3.7V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6X	-	S-1165B38MC-N6XTF	LVR-IC	LDO, 3.8V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6Y	-	S-1165B39MC-N6YTF	LVR-IC	LDO, 3.9V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N6Z	-	S-1165B40MC-N6ZTF	LVR-IC	LDO, 4.0V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
n7	-	BD46E391G-M	Vdet-IC	3.9V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
N7	-	AP139-35TW	LVR-IC	LDO, LN, +CE, 3.5V±2%, 300mA	TSOT-23-5L	28vrx	VR7	6a	Ana
N7	-	AP139-35W	LVR-IC	LDO, LN, +CE, 3.5V±2%, 300mA	SOT-23-5L	28vrx	VR7	6k	Ana
N7	-	BL8060CB5TR17	LVR-IC	LDO, 1.7V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N7	-	KRC670E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/4.7k	TESV	30/TD6	TD6	6l	Kec
N7	-	KRC670U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/4.7k	USV	28	TD9	6l	Kec
N7	-	R1121N471A	LVR-IC	LDO, Low noise, 4.7V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
N7	-	SiP21107DR-33-E3	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, -Error	SC-70-5L	28w	VR17	6a	Vs
N7	-	SiP21107DT-33-E3	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, -Error	TSOT-23-5L	28w	VR17	6a	Vs
N7	-	TC1185-5.0VRX	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
N7	ea	RN5RY571A	DC-DC-IC	VFM step-up, 5.7V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
N7	eu	BL8060CB5TR27	LVR-IC	LDO, 2.7V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N7	fg	BL8060CB5TR37	LVR-IC	LDO, 3.7V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N7	fh	BL8060CB5TR47	LVR-IC	LDO, 4.7V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N70	eh	XC6382E701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N70	er	XC6385E701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
N73	-	TC53N3702ECT	Vdet-IC	3.7V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
N7A	-	S-1165B41MC-N7ATF	LVR-IC	LDO, 4.1V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N7A	-	XC6108N37AMR	Vdet-IC	3.7V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N7A	-	XC6118C27AMR-G	Vdet-IC	2.7V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
N7B	-	S-1165B42MC-N7BTF	LVR-IC	LDO, 4.2V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N7B	-	XC6108N37BMR	Vdet-IC	3.7V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N7B	-	XC6118C27BMR-G	Vdet-IC	2.7V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
N7C	-	S-1165B43MC-N7CTF	LVR-IC	LDO, 4.3V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N7C	-	XC6108N37CMR	Vdet-IC	3.7V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N7C	-	XC6118C27CMR-G	Vdet-IC	2.7V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
N7D	-	S-1165B44MC-N7DTF	LVR-IC	LDO, 4.4V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N7D	-	XC6108N37DMR	Vdet-IC	3.7V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N7D	-	XC6118C27DMR-G	Vdet-IC	2.7V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
N7E	-	S-1165B45MC-N7ETF	LVR-IC	LDO, 4.5V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N7F	-	S-1165B46MC-N7FTF	LVR-IC	LDO, 4.6V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N7G	-	S-1165B47MC-N7GTF	LVR-IC	LDO, 4.7V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N7H	-	S-1165B48MC-N7HTF	LVR-IC	LDO, 4.8V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N7I	-	S-1165B49MC-N7ITF	LVR-IC	LDO, 4.9V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N7J	-	S-1165B50MC-N7JTF	LVR-IC	LDO, 5.0V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N7K	-	S-1165B51MC-N7KTF	LVR-IC	LDO, 5.1V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N7L	-	S-1165B52MC-N7LTF	LVR-IC	LDO, 5.2V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N7M	-	S-1165B53MC-N7MTF	LVR-IC	LDO, 5.3V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N7N	-	S-1165B54MC-N7NTF	LVR-IC	LDO, 5.4V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
N7O	-	S-1165B55MC-N7OTF	LVR-IC	LDO, 5.5V±1.0%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
n8	-	BD46E401G-M	Vdet-IC	4.0V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
N8	-	BL8060CB5TR18	LVR-IC	LDO, 1.8V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N8	-	KRC671E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	TESV	30/TD6	TD6	6l	Kec
N8	-	KRC671U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	USV	28	TD9	6l	Kec
N8	-	R1121N481A	LVR-IC	LDO, Low noise, 4.8V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
N8	-	SiP21107DR-46-E3	LVR-IC	LDO, 4.6V±1%, 150mA, +CE, -Error	SC-70-5L	28w	VR17	6a	Vs
N8	-	SiP21107DT-46-E3	LVR-IC	LDO, 4.6V±1%, 150mA, +CE, -Error	TSOT-23-5L	28w	VR17	6a	Vs
N8	-	TC1185-2.85VRX	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
N8	ea	RN5RY581A	DC-DC-IC	VFM step-up, 5.8V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
N8	eu	BL8060CB5TR28	LVR-IC	LDO, 2.8V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N8	fg	BL8060CB5TR38	LVR-IC	LDO, 3.8V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N8	fh	BL8060CB5TR48	LVR-IC	LDO, 4.8V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N815	-	MIC5305-1.5BD5	LVR-IC	LDO, LN, +CE, 1.5V±1%, 150mA	SOT-23-5	28vrx	VR7	6g	Mcr
N815	fb	MIC5305-1.5YD5	LVR-IC	LDO, LN, +CE, 1.5V±1%, 150mA, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
N818	-	MIC5305-1.8BD5	LVR-IC	LDO, LN, +CE, 1.8V±1%, 150mA	SOT-23-5	28vrx	VR7	6g	Mcr
N818	fb	MIC5305-1.8YD5	LVR-IC	LDO, LN, +CE, 1.8V±1%, 150mA, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
N825	-	MIC5305-2.5BD5	LVR-IC	LDO, LN, +CE, 2.5V±1%, 150mA	SOT-23-5	28vrx	VR7	6g	Mcr
N825	fb	MIC5305-2.5YD5	LVR-IC	LDO, LN, +CE, 2.5V±1%, 150mA, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
N826	-	MIC5305-2.6BD5	LVR-IC	LDO, LN, +CE, 2.6V±1%, 150mA	SOT-23-5	28vrx	VR7	6g	Mcr
N826	fb	MIC5305-2.6YD5	LVR-IC	LDO, LN, +CE, 2.6V±1%, 150mA, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
N827	-	MIC5305-2.7BD5	LVR-IC	LDO, LN, +CE, 2.7V±1%, 150mA	SOT-23-5	28vrx	VR7	6g	Mcr
N827	fb	MIC5305-2.7YD5	LVR-IC	LDO, LN, +CE, 2.7V±1%, 150mA, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
N828	-	MIC5305-2.8BD5	LVR-IC	LDO, LN, +CE, 2.8V±1%, 150mA	SOT-23-5	28vrx	VR7	6g	Mcr
N828	fb	MIC5305-2.8YD5	LVR-IC	LDO, LN, +CE, 2.8V±1%, 150mA, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
N829	-	MIC5305-2.9BD5	LVR-IC	LDO, LN, +CE, 2.9V±1%, 150mA	SOT-23-5	28vrx	VR7	6g	Mcr
N829	fb	MIC5305-2.9YD5	LVR-IC	LDO, LN, +CE, 2.9V±1%, 150mA, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
N82J	-	MIC5305-2.85BD5	LVR-IC	LDO, LN, +CE, 2.85V±1%, 150mA	SOT-23-5	28vrx	VR7	6g	Mcr
N82J	fb	MIC5305-2.85YD5	LVR-IC	LDO, LN, +CE, 2.85V±1%, 150mA, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
N83	-	TC53N3802ECT	Vdet-IC	3.8V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
N830	-	MIC5305-3.0BD5	LVR-IC	LDO, LN, +CE, 3.0V±1%, 150mA	SOT-23-5	28vrx	VR7	6g	Mcr
N830	fb	MIC5305-3.0YD5	LVR-IC	LDO, LN, +CE, 3.0V±1%, 150mA, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
N833	-	MIC5305-3.3BD5	LVR-IC	LDO, LN, +CE, 3.3V±1%, 150mA	SOT-23-5	28vrx	VR7	6g	Mcr
N833	fb	MIC5305-3.3YD5	LVR-IC	LDO, LN, +CE, 3.3V±1%, 150mA, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
N84H	-	MIC5305-4.75BD5	LVR-IC	LDO, LN, +CE, 4.75V±1%, 150mA	SOT-23-5	28vrx	VR7	6g	Mcr
N84H	fb	MIC5305-4.75YD5	LVR-IC	LDO, LN, +CE, 4.75V±1%, 150mA, Pb-free	SOT-23-5	28vrx	VR7	6g	Mcr
N8A	-	XC6108N38AMR	Vdet-IC	3.8V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N8A	-	XC6118C28AMR-G	Vdet-IC	2.8V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
N8B	-	XC6108N38BMR	Vdet-IC	3.8V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N8B	-	XC6118C28BMR-G	Vdet-IC	2.8V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
N8C	-	XC6108N38CMR	Vdet-IC	3.8V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N8C	-	XC6118C28CMR-G	Vdet-IC	2.8V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
N8D	-	XC6108N38DMR	Vdet-IC	3.8V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N8D	-	XC6118C28DMR-G	Vdet-IC	2.8V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
n9	-	BD46E411G-M	Vdet-IC	4.1V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
N9	-	BL8060CB5TR19	LVR-IC	LDO, 1.9V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N9	-	KRC672E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	TESV	30/TD6	TD6	6l	Kec
N9	-	KRC672U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	USV	28	TD9	6l	Kec
N9	-	R1121N491A	LVR-IC	LDO, Low noise, 4.9V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
N9	-	SiP21108DR-T1-E3	LVR-IC	LDO, Adjustable, 1.2..4.6V±1%, 150mA, +CE	TSOT-23-5L	28sg	VR16	6a	Vs
N9	-	SiP21108DT-T1-E3	LVR-IC	LDO, Adjustable, 1.2..4.6V±1%, 150mA, +CE	TSOT-23-5L	28sg	VR16	6a	Vs
N9	-	TC1185-3.6VRX	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
N9	ea	RN5RY591A	DC-DC-IC	VFM step-up, 5.9V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
N9	eu	BL8060CB5TR29	LVR-IC	LDO, 2.9V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N9	fg	BL8060CB5TR39	LVR-IC	LDO, 3.9V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N9	fh	BL8060CB5TR49	LVR-IC	LDO, 4.9V±2%, 300mA	SOT-23-5	28ym	VR1	6kg	Shb
N93	-	TC53N3902ECT	Vdet-IC	3.9V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
N9A	-	XC6108N39AMR	Vdet-IC	3.9V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N9A	-	XC6118C29AMR-G	Vdet-IC	2.9V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
N9B	-	XC6108N39BMR	Vdet-IC	3.9V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
N9B	-	XC6118C29BMR-G	Vdet-IC	2.9V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
N9C	-	XC6108N39CMR	Vdet-IC	3.9V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N9C	-	XC6118C29CMR-G	Vdet-IC	2.9V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
N9D	-	XC6108N39DMR	Vdet-IC	3.9V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
N9D	-	XC6118C29DMR-G	Vdet-IC	2.9V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
Na	-	BD52E39G-M	Vdet-IC	3.9V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
NA	-	KRC641T	Si-npn-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=1k/1k	TSV	28	TD6	6l	Kec
NA	-	KRC651E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	TESV	30/TD6	TD6	6l	Kec
NA	-	KRC651U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	USV	28	TD6	6l	Kec
NA	-	PT7M7020CLTA	Vdet-IC	2.0V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NA	-	SiP21106DR-25-E3	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SC-70-5L	28vrx	VR7	6a	Vs
NA	-	SiP21106DT-25-E3	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	TSOT-23-5L	28vrx	VR7	6a	Vs
NA	ea	PT7M7020CLTAE	Vdet-IC	2.0V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
NAA	-	RP109N081B	LVR-IC	LDO, 0.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAB	-	RP109N091B	LVR-IC	LDO, 0.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAC	-	RP109N101B	LVR-IC	LDO, 1.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAD	-	RP109N111B	LVR-IC	LDO, 1.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAE	-	RP109N121B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAF	-	RP109N131B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAG	-	RP109N141B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAH	-	RP109N151B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAJ	-	RP109N161B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAK	-	RP109N171B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAL	-	RP109N181B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAM	-	RP109N191B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAN	-	RP109N201B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAP	-	RP109N211B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAQ	-	RP109N221B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAR	-	RP109N231B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAS	-	RP109N241B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAT	-	RP109N251B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAU	-	RP109N261B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAV	-	RP109N271B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAW	-	RP109N281B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAX	-	RP109N291B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAY	-	RP109N301B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
NAZ	-	RP109N311B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
Nb	-	BD52E40G-M	Vdet-IC	4.0V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
NB	-	KRC642T	Si-npn-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=2.2k/2.2k	TSV	28	TD6	6l	Kec
NB	-	KRC652E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	TESV	30/TD6	TD6	6l	Kec
NB	-	KRC652U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	USV	28	TD9	6l	Kec
NB	-	PT7M7020CHTA	Vdet-IC	2.0V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NB	-	SiP21107DR-25-E3	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, -Error	SC-70-5L	28w	VR17	6a	Vs
NB	-	SiP21107DT-25-E3	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, -Error	TSOT-23-5L	28w	VR17	6a	Vs
NB	-	TC1014-2.6VRX	LVR-IC	LDO, 2.6V±2%, 50mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
NB	ea	PT7M7020CHTAE	Vdet-IC	2.0V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
NBA	-	RP109N081D	LVR-IC	LDO, 0.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBB	-	RP109N091D	LVR-IC	LDO, 0.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBC	-	RP109N101D	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBD	-	RP109N111D	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBE	-	RP109N121D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBF	-	RP109N131D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBG	-	RP109N141D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBH	-	RP109N151D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBJ	-	RP109N161D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBK	-	RP109N171D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBL	-	RP109N181D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBM	-	RP109N191D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBN	-	RP109N201D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBP	-	RP109N211D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBQ	-	RP109N221D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBR	-	RP109N231D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBS	-	RP109N241D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBT	-	RP109N251D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBU	-	RP109N261D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBV	-	RP109N271D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBW	-	RP109N281D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBX	-	RP109N291D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBY	-	RP109N301D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
NBZ	-	RP109N311D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Nc	-	BD52E41G-M	Vdet-IC	4.1V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
NC	-	KRC643T	Si-npn-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=4.7k/4.7k	TSV	28	TD6	6l	Kec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NC	-	KRC653E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	TESV	30/TD6	TD6	6l	Kec
NC	-	KRC653U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	USV	28	TD9	6l	Kec
NC	-	PT7M7020NLTA	Vdet-IC	2.0V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
NC	-	SiP21106DR-26-E3	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SC-70-5L	28vrx	VR7	6a	Vs
NC	-	SiP21106DT-26-E3	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	TSOT-23-5L	28vrx	VR7	6a	Vs
NC	ea	PT7M7020NLTAE	Vdet-IC	2.0V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
NC8	-	XC6222A081MR-G	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NC9	-	XC6222A091MR-G	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCA	-	XC6222A101MR-G	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCB	-	XC6222A111MR-G	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCC	-	XC6222A121MR-G	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCD	-	XC6222A131MR-G	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCE	-	XC6222A141MR-G	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCF	-	XC6222A151MR-G	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCH	-	XC6222A161MR-G	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCK	-	XC6222A171MR-G	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCL	-	XC6222A181MR-G	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCM	-	XC6222A191MR-G	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCN	-	XC6222A201MR-G	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCP	-	XC6222A211MR-G	LVR-IC	LDO, 2.1V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCR	-	XC6222A221MR-G	LVR-IC	LDO, 2.2V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCS	-	XC6222A231MR-G	LVR-IC	LDO, 2.3V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCT	-	XC6222A241MR-G	LVR-IC	LDO, 2.4V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCU	-	XC6222A251MR-G	LVR-IC	LDO, 2.5V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCV	-	XC6222A261MR-G	LVR-IC	LDO, 2.6V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCX	-	XC6222A271MR-G	LVR-IC	LDO, 2.7V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCY	-	XC6222A281MR-G	LVR-IC	LDO, 2.8V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NCZ	-	XC6222A291MR-G	LVR-IC	LDO, 2.9V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
Nd	-	BD52E42G-M	Vdet-IC	4.2V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ND	-	KRC644T	Si-npn-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=10k/10k	TSV	28	TD6	6l	Kec
ND	-	KRC654E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	TESV	30/TD6	TD6	6l	Kec
ND	-	KRC654U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	USV	28	TD9	6l	Kec
ND	-	PT7M7021CLTA	Vdet-IC	2.1V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
ND	-	SiP21107DR-26-E3	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, -Error	SC-70-5L	28w	VR17	6a	Vs
ND	-	SiP21107DT-26-E3	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, -Error	TSOT-23-5L	28w	VR17	6a	Vs
ND	ea	PT7M7021CLTAE	Vdet-IC	2.1V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
ND8	-	XC6222A08BMR-G	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
ND9	-	XC6222A09BMR-G	LVR-IC	LDO, 0.95V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDA	-	XC6222A10BMR-G	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDB	-	XC6222A11BMR-G	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDC	-	XC6222A12BMR-G	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDD	-	XC6222A13BMR-G	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDE	-	XC6222A14BMR-G	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDF	-	XC6222A15BMR-G	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDH	-	XC6222A16BMR-G	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDK	-	XC6222A17BMR-G	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDL	-	XC6222A18BMR-G	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDM	-	XC6222A19BMR-G	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDN	-	XC6222A20BMR-G	LVR-IC	LDO, 2.05V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDP	-	XC6222A21BMR-G	LVR-IC	LDO, 2.15V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDR	-	XC6222A22BMR-G	LVR-IC	LDO, 2.25V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDS	-	XC6222A23BMR-G	LVR-IC	LDO, 2.35V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDT	-	XC6222A24BMR-G	LVR-IC	LDO, 2.45V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDU	-	XC6222A25BMR-G	LVR-IC	LDO, 2.55V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDV	-	XC6222A26BMR-G	LVR-IC	LDO, 2.65V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDX	-	XC6222A27BMR-G	LVR-IC	LDO, 2.75V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDY	-	XC6222A28BMR-G	LVR-IC	LDO, 2.85V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NDZ	-	XC6222A29BMR-G	LVR-IC	LDO, 2.95V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
Ne	-	BD52E43G-M	Vdet-IC	4.3V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
NE	-	KRC645T	Si-npn-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=1k/10k	TSV	28	TD6	6l	Kec
NE	-	KRC655E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	TESV	30/TD6	TD6	6l	Kec
NE	-	KRC655U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	USV	28	TD9	6l	Kec
NE	-	PT7M7021CHTA	Vdet-IC	2.1V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NE	-	RT2N08M	Si-npn-Digi	Dual, Sw, 50V, 100mA, 150mW, 200MHz, R1/R2=2.2k/10k	SOT-23-5	28	TD6	6a	Mit
NE	-	SiP21106DR-285-E3	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SC-70-5L	28vrx	VR7	6a	Vs
NE	-	SiP21106DT-285-E3	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	TSOT-23-5L	28vrx	VR7	6a	Vs
NE	ea	PT7M7021CHTAE	Vdet-IC	2.1V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
NE0	-	XC6222A301MR-G	LVR-IC	LDO, 3.0V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NE1	-	XC6222A311MR-G	LVR-IC	LDO, 3.1V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NE18	-	MIC5207-1.8BD5	LVR-IC	LDO, Low noise, 1.8V±2%, 180mA, +CE	TSOT-23-5	28vrx	VR7	6g	Mcr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NE18	fb	MIC5207-1.8YD5	LVR-IC	LDO, Low noise, 1.8V±2%, 180mA, +CE, Pb-free	TSOT-23-5	28vrx	VR7	6g	Mcr
NE2	-	XC6222A321MR-G	LVR-IC	LDO, 3.2V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NE3	-	XC6222A331MR-G	LVR-IC	LDO, 3.3V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NE4	-	XC6222A341MR-G	LVR-IC	LDO, 3.4V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NE5	-	XC6222A351MR-G	LVR-IC	LDO, 3.5V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NE6	-	XC6222A361MR-G	LVR-IC	LDO, 3.6V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NE7	-	XC6222A371MR-G	LVR-IC	LDO, 3.7V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NE8	-	XC6222A381MR-G	LVR-IC	LDO, 3.8V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NE9	-	XC6222A391MR-G	LVR-IC	LDO, 3.9V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NEA	-	XC6222A401MR-G	LVR-IC	LDO, 4.0V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NEB	-	XC6222A411MR-G	LVR-IC	LDO, 4.1V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NEC	-	XC6222A421MR-G	LVR-IC	LDO, 4.2V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NED	-	XC6222A431MR-G	LVR-IC	LDO, 4.3V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NEE	-	XC6222A441MR-G	LVR-IC	LDO, 4.4V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NEF	-	XC6222A451MR-G	LVR-IC	LDO, 4.5V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NEH	-	XC6222A461MR-G	LVR-IC	LDO, 4.6V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NEK	-	XC6222A471MR-G	LVR-IC	LDO, 4.7V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NEL	-	XC6222A481MR-G	LVR-IC	LDO, 4.8V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NEM	-	XC6222A491MR-G	LVR-IC	LDO, 4.9V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NEN	-	XC6222A501MR-G	LVR-IC	LDO, 5.0V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
Nf	-	BD52E44G-M	Vdet-IC	4.4V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
NF	-	KRC646T	Si-npn-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=2.2k/10k	TSV	28	TD6	6l	Kec
NF	-	KRC656E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	TESV	30/TD6	TD6	6l	Kec
NF	-	KRC656U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	USV	28	TD9	6l	Kec
NF	-	PT7M7021NLTA	Vdet-IC	2.1V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
NF	-	SiP21107DR-285-E3	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, -Error	SC-70-5L	28w	VR17	6a	Vs
NF	-	SiP21107DT-285-E3	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, -Error	TSOT-23-5L	28w	VR17	6a	Vs
NF	ea	PT7M7021NLTAE	Vdet-IC	2.1V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
NF0	-	XC6222A30BMR-G	LVR-IC	LDO, 3.05V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NF1	-	XC6222A31BMR-G	LVR-IC	LDO, 3.15V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NF2	-	XC6222A32BMR-G	LVR-IC	LDO, 3.25V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NF3	-	XC6222A33BMR-G	LVR-IC	LDO, 3.35V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NF4	-	XC6222A34BMR-G	LVR-IC	LDO, 3.45V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NF5	-	XC6222A35BMR-G	LVR-IC	LDO, 3.55V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NF6	-	XC6222A36BMR-G	LVR-IC	LDO, 3.65V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NF7	-	XC6222A37BMR-G	LVR-IC	LDO, 3.75V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NF8	-	XC6222A38BMR-G	LVR-IC	LDO, 3.85V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NF9	-	XC6222A39BMR-G	LVR-IC	LDO, 3.95V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NFA	-	XC6222A40BMR-G	LVR-IC	LDO, 4.05V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NFB	-	XC6222A41BMR-G	LVR-IC	LDO, 4.15V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NFC	-	XC6222A42BMR-G	LVR-IC	LDO, 4.25V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NFD	-	XC6222A43BMR-G	LVR-IC	LDO, 4.35V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NFE	-	XC6222A44BMR-G	LVR-IC	LDO, 4.45V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NFF	-	XC6222A45BMR-G	LVR-IC	LDO, 4.55V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NFH	-	XC6222A46BMR-G	LVR-IC	LDO, 4.65V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NFK	-	XC6222A47BMR-G	LVR-IC	LDO, 4.75V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NFL	-	XC6222A48BMR-G	LVR-IC	LDO, 4.85V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
NFM	-	XC6222A49BMR-G	LVR-IC	LDO, 4.95V±1%, 700mA, +CE	SOT-25	28cx	VR4	6g	Tor
Ng	-	BD52E45G-M	Vdet-IC	4.5V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
NG	-	PT7M7022CLTA	Vdet-IC	2.2V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NG	-	SiP21106DR-30-E3	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SC-70-5L	28vrx	VR7	6a	Vs
NG	-	SiP21106DT-30-E3	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	TSOT-23-5L	28vrx	VR7	6a	Vs
NG	ea	PT7M7022CLTAE	Vdet-IC	2.2V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
Nh	-	BD52E46G-M	Vdet-IC	4.6V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
NH	-	KRC657E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	TESV	30/TD6	TD6	6l	Kec
NH	-	KRC657U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	USV	28	TD9	6l	Kec
NH	-	PT7M7022CHTA	Vdet-IC	2.2V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NH	-	SiP21107DR-30-E3	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, -Error	SC-70-5L	28w	VR17	6a	Vs
NH	-	SiP21107DT-30-E3	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, -Error	TSOT-23-5L	28w	VR17	6a	Vs
NH	ea	PT7M7022CHTAE	Vdet-IC	2.2V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
NH8	-	XC6222B081MR-G	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NH9	-	XC6222B091MR-G	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHA	-	XC6222B101MR-G	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHB	-	XC6222B111MR-G	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHC	-	XC6222B121MR-G	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHD	-	XC6222B131MR-G	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHE	-	XC6222B141MR-G	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHF	-	XC6222B151MR-G	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHH	-	XC6222B161MR-G	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHK	-	XC6222B171MR-G	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NHL	-	XC6222B181MR-G	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHM	-	XC6222B191MR-G	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHN	-	XC6222B201MR-G	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHP	-	XC6222B211MR-G	LVR-IC	LDO, 2.1V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHR	-	XC6222B221MR-G	LVR-IC	LDO, 2.2V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHS	-	XC6222B231MR-G	LVR-IC	LDO, 2.3V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHT	-	XC6222B241MR-G	LVR-IC	LDO, 2.4V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHU	-	XC6222B251MR-G	LVR-IC	LDO, 2.5V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHV	-	XC6222B261MR-G	LVR-IC	LDO, 2.6V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHX	-	XC6222B271MR-G	LVR-IC	LDO, 2.7V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHY	-	XC6222B281MR-G	LVR-IC	LDO, 2.8V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NHZ	-	XC6222B291MR-G	LVR-IC	LDO, 2.9V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NI	-	KRC658E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	TESV	30/TD6	TD6	6l	Kec
NI	-	KRC658U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	USV	28	TD9	6l	Kec
NI	-	PT7M7022NLTA	Vdet-IC	2.2V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
NI	ea	PT7M7022NLTAE	Vdet-IC	2.2V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
NJ	-	KRC659E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	TESV	30/TD6	TD7	6l	Kec
NJ	-	KRC659U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	USV	28	TD9	6l	Kec
NJ	-	PT7M7023CLTA	Vdet-IC	2.3V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NJ	-	SiP21106DR-475-E3	LVR-IC	LDO, 4.75V±1%, 150mA, +CE	SC-70-5L	28vrx	VR7	6a	Vs
NJ	-	SiP21106DT-475-E3	LVR-IC	LDO, 4.75V±1%, 150mA, +CE	TSOT-23-5L	28vrx	VR7	6a	Vs
NJ	ea	PT7M7023CLTAE	Vdet-IC	2.3V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
Nk	-	BD52E47G-M	Vdet-IC	4.7V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
NK	-	KRC660E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4.7k	TESV	30/TD6	TD6	6l	Kec
NK	-	KRC660U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4.7k	USV	28	TD9	6l	Kec
NK	-	PT7M7023CHTA	Vdet-IC	2.3V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NK	ea	PT7M7023CHTAE	Vdet-IC	2.3V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
NK8	-	XC6222B08BMR-G	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NK9	-	XC6222B09BMR-G	LVR-IC	LDO, 0.95V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKA	-	XC6222B10BMR-G	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKB	-	XC6222B11BMR-G	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKC	-	XC6222B12BMR-G	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKD	-	XC6222B13BMR-G	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKE	-	XC6222B14BMR-G	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKF	-	XC6222B15BMR-G	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKH	-	XC6222B16BMR-G	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKK	-	XC6222B17BMR-G	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKL	-	XC6222B18BMR-G	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKM	-	XC6222B19BMR-G	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKN	-	XC6222B20BMR-G	LVR-IC	LDO, 2.05V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKP	-	XC6222B21BMR-G	LVR-IC	LDO, 2.15V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKR	-	XC6222B22BMR-G	LVR-IC	LDO, 2.25V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKS	-	XC6222B23BMR-G	LVR-IC	LDO, 2.35V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKT	-	XC6222B24BMR-G	LVR-IC	LDO, 2.45V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKU	-	XC6222B25BMR-G	LVR-IC	LDO, 2.55V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKV	-	XC6222B26BMR-G	LVR-IC	LDO, 2.65V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKX	-	XC6222B27BMR-G	LVR-IC	LDO, 2.75V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKY	-	XC6222B28BMR-G	LVR-IC	LDO, 2.85V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NKZ	-	XC6222B29BMR-G	LVR-IC	LDO, 2.95V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NL	-	PT7M7023NLTA	Vdet-IC	2.3V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
NL	-	R1122N401A	LVR-IC	LDO, Low noise, 4V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
NL	ea	PT7M7023NLTAE	Vdet-IC	2.3V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
NL0	-	XC6222B301MR-G	LVR-IC	LDO, 3.0V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NL1	-	XC6222B311MR-G	LVR-IC	LDO, 3.1V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NL2	-	XC6222B321MR-G	LVR-IC	LDO, 3.2V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NL3	-	XC6222B331MR-G	LVR-IC	LDO, 3.3V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NL4	-	XC6222B341MR-G	LVR-IC	LDO, 3.4V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NL5	-	XC6222B351MR-G	LVR-IC	LDO, 3.5V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NL6	-	XC6222B361MR-G	LVR-IC	LDO, 3.6V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NL7	-	XC6222B371MR-G	LVR-IC	LDO, 3.7V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NL8	-	XC6222B381MR-G	LVR-IC	LDO, 3.8V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NL9	-	XC6222B391MR-G	LVR-IC	LDO, 3.9V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NLA	-	XC6222B401MR-G	LVR-IC	LDO, 4.0V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NLB	-	XC6222B411MR-G	LVR-IC	LDO, 4.1V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NLC	-	XC6222B421MR-G	LVR-IC	LDO, 4.2V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NLD	-	XC6222B431MR-G	LVR-IC	LDO, 4.3V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NLE	-	XC6222B441MR-G	LVR-IC	LDO, 4.4V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NLF	-	XC6222B451MR-G	LVR-IC	LDO, 4.5V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NLH	-	XC6222B461MR-G	LVR-IC	LDO, 4.6V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NLK	-	XC6222B471MR-G	LVR-IC	LDO, 4.7V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NLL	-	XC6222B481MR-G	LVR-IC	LDO, 4.8V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NLM	-	XC6222B491MR-G	LVR-IC	LDO, 4.9V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NLN	-	XC6222B501MR-G	LVR-IC	LDO, 5.0V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
Nm	-	BD52E48G-M	Vdet-IC	4.8V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
NM	-	KRC661E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	TESV	30/TD6	TD6	6l	Kec
NM	-	KRC661U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	USV	28	TD9	6l	Kec
NM	-	PT7M7024CLTA	Vdet-IC	2.4V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NM	-	R1122N411A	LVR-IC	LDO, Low noise, 4.1V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
NM	-	SiP21106DT-45-E3	LVR-IC	LDO, 4.5V±1%, 150mA, +CE	TSOT-23-5L	28vrx	VR7	6a	Vs
NM	ea	PT7M7024CLTAE	Vdet-IC	2.4V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
NM0	-	XC6222B30BMR-G	LVR-IC	LDO, 3.05V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NM1	-	XC6222B31BMR-G	LVR-IC	LDO, 3.15V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NM2	-	XC6222B32BMR-G	LVR-IC	LDO, 3.25V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NM3	-	XC6222B33BMR-G	LVR-IC	LDO, 3.35V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NM4	-	XC6222B34BMR-G	LVR-IC	LDO, 3.45V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NM5	-	XC6222B35BMR-G	LVR-IC	LDO, 3.55V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NM6	-	XC6222B36BMR-G	LVR-IC	LDO, 3.65V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NM7	-	XC6222B37BMR-G	LVR-IC	LDO, 3.75V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NM8	-	XC6222B38BMR-G	LVR-IC	LDO, 3.85V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NM9	-	XC6222B39BMR-G	LVR-IC	LDO, 3.95V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NMA	-	XC6222B40BMR-G	LVR-IC	LDO, 4.05V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NMB	-	XC6222B41BMR-G	LVR-IC	LDO, 4.15V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NMC	-	XC6222B42BMR-G	LVR-IC	LDO, 4.25V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NMD	-	XC6222B43BMR-G	LVR-IC	LDO, 4.35V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NME	-	XC6222B44BMR-G	LVR-IC	LDO, 4.45V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NMF	-	XC6222B45BMR-G	LVR-IC	LDO, 4.55V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NMH	-	XC6222B46BMR-G	LVR-IC	LDO, 4.65V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NMK	-	XC6222B47BMR-G	LVR-IC	LDO, 4.75V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NML	-	XC6222B48BMR-G	LVR-IC	LDO, 4.85V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
NMM	-	XC6222B49BMR-G	LVR-IC	LDO, 4.95V±1%, 700mA, +CE, CL	SOT-25	28cx	VR4	6g	Tor
Nn	-	BD52E49G-M	Vdet-IC	4.9V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
NN	-	KRC662E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=100k	TESV	30/TD6	TD6	6l	Kec
NN	-	KRC662U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=100k	USV	28	TD9	6l	Kec
NN	-	PT7M7024CHTA	Vdet-IC	2.4V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NN	-	R1122N421A	LVR-IC	LDO, Low noise, 4.2V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
NN	ea	PT7M7024CHTAE	Vdet-IC	2.4V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
NN8	-	XC6222C081MR-G	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NN9	-	XC6222C091MR-G	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNA	-	XC6222C101MR-G	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNB	-	XC6222C111MR-G	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNC	-	XC6222C121MR-G	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NND	-	XC6222C131MR-G	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNE	-	XC6222C141MR-G	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNF	-	XC6222C151MR-G	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNH	-	XC6222C161MR-G	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNK	-	XC6222C171MR-G	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNL	-	XC6222C181MR-G	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNM	-	XC6222C191MR-G	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNN	-	XC6222C201MR-G	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNP	-	XC6222C211MR-G	LVR-IC	LDO, 2.1V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNR	-	XC6222C221MR-G	LVR-IC	LDO, 2.2V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNS	-	XC6222C231MR-G	LVR-IC	LDO, 2.3V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNT	-	XC6222C241MR-G	LVR-IC	LDO, 2.4V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNU	-	XC6222C251MR-G	LVR-IC	LDO, 2.5V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNV	-	XC6222C261MR-G	LVR-IC	LDO, 2.6V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNX	-	XC6222C271MR-G	LVR-IC	LDO, 2.7V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNY	-	XC6222C281MR-G	LVR-IC	LDO, 2.8V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NNZ	-	XC6222C291MR-G	LVR-IC	LDO, 2.9V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NO	-	KRC663E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=22k	TESV	30/TD6	TD6	6l	Kec
NO	-	KRC663U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=22k	USV	28	TD9	6l	Kec
NO	-	PT7M7024NLTA	Vdet-IC	2.4V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
NO	ea	PT7M7024NLTAE	Vdet-IC	2.4V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
Np	-	BD52E50G-M	Vdet-IC	5.0V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
NP	-	KRC664E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=47k	TESV	30/TD6	TD6	6l	Kec
NP	-	KRC664U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=47k	USV	28	TD9	6l	Kec
NP	-	PT7M7025CLTA	Vdet-IC	2.5V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NP	-	R1122N431A	LVR-IC	LDO, Low noise, 4.3V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
NP	-	SiP21106DR-12-E3	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	SC-70-5L	28vrx	VR7	6a	Vs
NP	-	SiP21106DT-12-E3	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	TSOT-23-5L	28vrx	VR7	6a	Vs
NP	ea	PT7M7025CLTAE	Vdet-IC	2.5V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NP8	-	XC6222C08BMR-G	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NP9	-	XC6222C09BMR-G	LVR-IC	LDO, 0.95V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPA	-	XC6222C10BMR-G	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPB	-	XC6222C11BMR-G	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPC	-	XC6222C12BMR-G	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPD	-	XC6222C13BMR-G	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPE	-	XC6222C14BMR-G	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPF	-	XC6222C15BMR-G	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPH	-	XC6222C16BMR-G	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPK	-	XC6222C17BMR-G	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPL	-	XC6222C18BMR-G	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPM	-	XC6222C19BMR-G	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPN	-	XC6222C20BMR-G	LVR-IC	LDO, 2.05V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPP	-	XC6222C21BMR-G	LVR-IC	LDO, 2.15V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPR	-	XC6222C22BMR-G	LVR-IC	LDO, 2.25V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPS	-	XC6222C23BMR-G	LVR-IC	LDO, 2.35V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPT	-	XC6222C24BMR-G	LVR-IC	LDO, 2.45V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPU	-	XC6222C25BMR-G	LVR-IC	LDO, 2.55V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPV	-	XC6222C26BMR-G	LVR-IC	LDO, 2.65V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPX	-	XC6222C27BMR-G	LVR-IC	LDO, 2.75V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPY	-	XC6222C28BMR-G	LVR-IC	LDO, 2.85V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NPZ	-	XC6222C29BMR-G	LVR-IC	LDO, 2.95V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NQ	-	PT7M7025CHTA	Vdet-IC	2.5V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NQ	-	R1122N441A	LVR-IC	LDO, Low noise, 4.4V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
NQ	-	SiP21107DR-12-E3	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, -Error	SC-70-5L	28w	VR17	6a	Vs
NQ	-	SiP21107DT-12-E3	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, -Error	TSOT-23-5L	28w	VR17	6a	Vs
NQ	ea	PT7M7025CHTAE	Vdet-IC	2.5V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
Nr	-	BD52E51G-M	Vdet-IC	5.1V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
NR	-	PT7M7025NLTA	Vdet-IC	2.5V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
NR	-	R1122N451A	LVR-IC	LDO, Low noise, 4.5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
NR	ea	PT7M7025NLTAE	Vdet-IC	2.5V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
NR0	-	XC6222C301MR-G	LVR-IC	LDO, 3.0V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NR1	-	XC6222C311MR-G	LVR-IC	LDO, 3.1V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NR2	-	XC6222C321MR-G	LVR-IC	LDO, 3.2V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NR3	-	XC6222C331MR-G	LVR-IC	LDO, 3.3V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NR4	-	XC6222C341MR-G	LVR-IC	LDO, 3.4V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NR5	-	XC6222C351MR-G	LVR-IC	LDO, 3.5V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NR6	-	XC6222C361MR-G	LVR-IC	LDO, 3.6V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NR7	-	XC6222C371MR-G	LVR-IC	LDO, 3.7V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NR8	-	XC6222C381MR-G	LVR-IC	LDO, 3.8V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NR9	-	XC6222C391MR-G	LVR-IC	LDO, 3.9V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NRA	-	XC6222C401MR-G	LVR-IC	LDO, 4.0V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NRB	-	XC6222C411MR-G	LVR-IC	LDO, 4.1V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NRC	-	XC6222C421MR-G	LVR-IC	LDO, 4.2V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NRD	-	XC6222C431MR-G	LVR-IC	LDO, 4.3V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NRE	-	XC6222C441MR-G	LVR-IC	LDO, 4.4V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NRF	-	XC6222C451MR-G	LVR-IC	LDO, 4.5V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NRH	-	XC6222C461MR-G	LVR-IC	LDO, 4.6V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NRK	-	XC6222C471MR-G	LVR-IC	LDO, 4.7V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NRL	-	XC6222C481MR-G	LVR-IC	LDO, 4.8V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NRM	-	XC6222C491MR-G	LVR-IC	LDO, 4.9V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NRN	-	XC6222C501MR-G	LVR-IC	LDO, 5.0V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NS	-	PT7M7026CLTA	Vdet-IC	2.6V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NS	-	R1122N461A	LVR-IC	LDO, Low noise, 4.6V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
NS	ea	PT7M7026CLTAE	Vdet-IC	2.6V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
NS0	-	XC6222C30BMR-G	LVR-IC	LDO, 3.05V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NS1	-	XC6222C31BMR-G	LVR-IC	LDO, 3.15V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NS2	-	XC6222C32BMR-G	LVR-IC	LDO, 3.25V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NS3	-	XC6222C33BMR-G	LVR-IC	LDO, 3.35V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NS4	-	XC6222C34BMR-G	LVR-IC	LDO, 3.45V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NS5	-	XC6222C35BMR-G	LVR-IC	LDO, 3.55V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NS6	-	XC6222C36BMR-G	LVR-IC	LDO, 3.65V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NS7	-	XC6222C37BMR-G	LVR-IC	LDO, 3.75V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NS8	-	XC6222C38BMR-G	LVR-IC	LDO, 3.85V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NS9	-	XC6222C39BMR-G	LVR-IC	LDO, 3.95V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NSA	-	XC6222C40BMR-G	LVR-IC	LDO, 4.05V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NSB	-	XC6222C41BMR-G	LVR-IC	LDO, 4.15V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NSC	-	XC6222C42BMR-G	LVR-IC	LDO, 4.25V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NSD	-	XC6222C43BMR-G	LVR-IC	LDO, 4.35V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NSE	-	XC6222C44BMR-G	LVR-IC	LDO, 4.45V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NSF	-	XC6222C45BMR-G	LVR-IC	LDO, 4.55V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NSH	-	XC6222C46BMR-G	LVR-IC	LDO, 4.65V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NSK	-	XC6222C47BMR-G	LVR-IC	LDO, 4.75V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NSL	-	XC6222C48BMR-G	LVR-IC	LDO, 4.85V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NSM	-	XC6222C49BMR-G	LVR-IC	LDO, 4.95V±1%, 700mA, +CE, PDR	SOT-25	28cx	VR4	6g	Tor
NT	-	PT7M7026CHTA	Vdet-IC	2.6V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NT	-	R1122N471A	LVR-IC	LDO, Low noise, 4.7V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
NT	-	TC1185-2.6VRX	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
NT	ea	PT7M7026CHTAE	Vdet-IC	2.6V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
NT8	-	XC6222D081MR-G	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NT9	-	XC6222D091MR-G	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTA	-	XC6222D101MR-G	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTB	-	XC6222D111MR-G	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTC	-	XC6222D121MR-G	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTD	-	XC6222D131MR-G	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTE	-	XC6222D141MR-G	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTF	-	XC6222D151MR-G	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTH	-	XC6222D161MR-G	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTK	-	XC6222D171MR-G	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTL	-	XC6222D181MR-G	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTM	-	XC6222D191MR-G	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTN	-	XC6222D201MR-G	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTP	-	XC6222D211MR-G	LVR-IC	LDO, 2.1V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTR	-	XC6222D221MR-G	LVR-IC	LDO, 2.2V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTS	-	XC6222D231MR-G	LVR-IC	LDO, 2.3V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTT	-	XC6222D241MR-G	LVR-IC	LDO, 2.4V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTU	-	XC6222D251MR-G	LVR-IC	LDO, 2.5V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTV	-	XC6222D261MR-G	LVR-IC	LDO, 2.6V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTX	-	XC6222D271MR-G	LVR-IC	LDO, 2.7V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTY	-	XC6222D281MR-G	LVR-IC	LDO, 2.8V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NTZ	-	XC6222D291MR-G	LVR-IC	LDO, 2.9V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NU	-	PT7M7026NLTA	Vdet-IC	2.6V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
NU	-	R1122N481A	LVR-IC	LDO, Low noise, 4.8V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
NU	ea	PT7M7026NLTAE	Vdet-IC	2.6V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
NU18	-	MIC5247-1.8BD5	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6g	Mcr
NU18	fb	MIC5247-1.8BD5	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, Pb-free	TSOT-23-5	28vrx	VR7	6g	Mcr
NU20	-	MIC5247-2.0BD5	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6g	Mcr
NU20	fb	MIC5247-2.0BD5	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, Pb-free	TSOT-23-5	28vrx	VR7	6g	Mcr
NU8	-	XC6222D08BMR-G	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NU9	-	XC6222D09BMR-G	LVR-IC	LDO, 0.95V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUA	-	XC6222D10BMR-G	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUB	-	XC6222D11BMR-G	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUC	-	XC6222D12BMR-G	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUD	-	XC6222D13BMR-G	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUE	-	XC6222D14BMR-G	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUF	-	XC6222D15BMR-G	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUH	-	XC6222D16BMR-G	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUK	-	XC6222D17BMR-G	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUL	-	XC6222D18BMR-G	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUM	-	XC6222D19BMR-G	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUN	-	XC6222D20BMR-G	LVR-IC	LDO, 2.05V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUP	-	XC6222D21BMR-G	LVR-IC	LDO, 2.15V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUR	-	XC6222D22BMR-G	LVR-IC	LDO, 2.25V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUS	-	XC6222D23BMR-G	LVR-IC	LDO, 2.35V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUT	-	XC6222D24BMR-G	LVR-IC	LDO, 2.45V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUU	-	XC6222D25BMR-G	LVR-IC	LDO, 2.55V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUV	-	XC6222D26BMR-G	LVR-IC	LDO, 2.65V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUX	-	XC6222D27BMR-G	LVR-IC	LDO, 2.75V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUY	-	XC6222D28BMR-G	LVR-IC	LDO, 2.85V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NUZ	-	XC6222D29BMR-G	LVR-IC	LDO, 2.95V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NV	-	PT7M7027CLTA	Vdet-IC	2.7V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NV	-	R1122N491A	LVR-IC	LDO, Low noise, 4.9V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
NV	ea	PT7M7027CLTAE	Vdet-IC	2.7V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
NV0	-	XC6222D301MR-G	LVR-IC	LDO, 3.0V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NV1	-	XC6222D311MR-G	LVR-IC	LDO, 3.1V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NV2	-	XC6222D321MR-G	LVR-IC	LDO, 3.2V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NV3	-	XC6222D331MR-G	LVR-IC	LDO, 3.3V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NV4	-	XC6222D341MR-G	LVR-IC	LDO, 3.4V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NV5	-	XC6222D351MR-G	LVR-IC	LDO, 3.5V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NV6	-	XC6222D361MR-G	LVR-IC	LDO, 3.6V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NV7	-	XC6222D371MR-G	LVR-IC	LDO, 3.7V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NV8	-	XC6222D381MR-G	LVR-IC	LDO, 3.8V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NV9	-	XC6222D391MR-G	LVR-IC	LDO, 3.9V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NVA	-	XC6222D401MR-G	LVR-IC	LDO, 4.0V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NVB	-	XC6222D411MR-G	LVR-IC	LDO, 4.1V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NVC	-	XC6222D421MR-G	LVR-IC	LDO, 4.2V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NVD	-	XC6222D431MR-G	LVR-IC	LDO, 4.3V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NVE	-	XC6222D441MR-G	LVR-IC	LDO, 4.4V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NVF	-	XC6222D451MR-G	LVR-IC	LDO, 4.5V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NVH	-	XC6222D461MR-G	LVR-IC	LDO, 4.6V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NVK	-	XC6222D471MR-G	LVR-IC	LDO, 4.7V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NVL	-	XC6222D481MR-G	LVR-IC	LDO, 4.8V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NVM	-	XC6222D491MR-G	LVR-IC	LDO, 4.9V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NVN	-	XC6222D501MR-G	LVR-IC	LDO, 5.0V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NW	-	PT7M7027CHTA	Vdet-IC	2.7V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NW	ea	PT7M7027CHTAE	Vdet-IC	2.7V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
NW25	-	MIC5255-2.5BD5	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6g	Mcr
NW25	fb	MIC5255-2.5YD5	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, Pb-free	TSOT-23-5	28vrx	VR7	6g	Mcr
NW26	-	MIC5255-2.6BD5	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6g	Mcr
NW26	fb	MIC5255-2.6YD5	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, Pb-free	TSOT-23-5	28vrx	VR7	6g	Mcr
NW27	-	MIC5255-2.7BD5	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6g	Mcr
NW27	fb	MIC5255-2.7YD5	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, Pb-free	TSOT-23-5	28vrx	VR7	6g	Mcr
NW28	-	MIC5255-2.8BD5	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6g	Mcr
NW28	fb	MIC5255-2.8YD5	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, Pb-free	TSOT-23-5	28vrx	VR7	6g	Mcr
NW29	-	MIC5255-2.9BD5	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6g	Mcr
NW29	fb	MIC5255-2.9YD5	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, Pb-free	TSOT-23-5	28vrx	VR7	6g	Mcr
NW2J	-	MIC5255-2.85BD5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6g	Mcr
NW2J	fb	MIC5255-2.85YD5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, Pb-free	TSOT-23-5	28vrx	VR7	6g	Mcr
NW30	-	MIC5255-3.0BD5	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6g	Mcr
NW30	fb	MIC5255-3.0YD5	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, Pb-free	TSOT-23-5	28vrx	VR7	6g	Mcr
NW33	-	MIC5255-3.3BD5	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	TSOT-23-5	28vrx	VR7	6g	Mcr
NW33	fb	MIC5255-3.3YD5	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, Pb-free	TSOT-23-5	28vrx	VR7	6g	Mcr
NX	-	PT7M7027NLTA	Vdet-IC	2.7V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
NX	ea	PT7M7027NLTAE	Vdet-IC	2.7V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
NX0	-	XC6222D30BMR-G	LVR-IC	LDO, 3.05V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NX1	-	XC6222D31BMR-G	LVR-IC	LDO, 3.15V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NX2	-	XC6222D32BMR-G	LVR-IC	LDO, 3.25V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NX3	-	XC6222D33BMR-G	LVR-IC	LDO, 3.35V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NX4	-	XC6222D34BMR-G	LVR-IC	LDO, 3.45V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NX5	-	XC6222D35BMR-G	LVR-IC	LDO, 3.55V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NX6	-	XC6222D36BMR-G	LVR-IC	LDO, 3.65V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NX7	-	XC6222D37BMR-G	LVR-IC	LDO, 3.75V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NX8	-	XC6222D38BMR-G	LVR-IC	LDO, 3.85V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NX9	-	XC6222D39BMR-G	LVR-IC	LDO, 3.95V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NXA	-	XC6222D40BMR-G	LVR-IC	LDO, 4.05V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NXB	-	XC6222D41BMR-G	LVR-IC	LDO, 4.15V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NXC	-	XC6222D42BMR-G	LVR-IC	LDO, 4.25V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NXD	-	XC6222D43BMR-G	LVR-IC	LDO, 4.35V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NXE	-	XC6222D44BMR-G	LVR-IC	LDO, 4.45V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NXF	-	XC6222D45BMR-G	LVR-IC	LDO, 4.55V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NXH	-	XC6222D46BMR-G	LVR-IC	LDO, 4.65V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NXK	-	XC6222D47BMR-G	LVR-IC	LDO, 4.75V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NXL	-	XC6222D48BMR-G	LVR-IC	LDO, 4.85V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
NXM	-	XC6222D49BMR-G	LVR-IC	LDO, 4.95V±1%, 700mA, +CE, CL, PDR	SOT-25	28cx	VR4	6g	Tor
Ny	-	BD52E52G-M	Vdet-IC	5.2V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
NY	-	PT7M7028CLTA	Vdet-IC	2.8V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NY	-	TC1185-1.8VRX	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
NY	ea	PT7M7028CLTAE	Vdet-IC	2.8V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
NYA	-	S-1111B15MC-NYATFG	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYA	-	S-1111B15PN-NYATFG	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYB	-	S-1111B16MC-NYBTFG	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYB	-	S-1111B16PN-NYBTFG	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYC	-	S-1111B17MC-NYCTFG	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYC	-	S-1111B17PN-NYCTFG	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYD	-	S-1111B18MC-NYDTFG	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYD	-	S-1111B18PN-NYDTFG	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYE	-	S-1111B19MC-NYETFG	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYE	-	S-1111B19PN-NYETFG	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYF	-	S-1111B20MC-NYFTFG	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYF	-	S-1111B20PN-NYFTFG	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NYG	-	S-1111B21MC-NYGTFG	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYG	-	S-1111B21PN-NYGTFG	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYH	-	S-1111B22MC-NYHTFG	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYH	-	S-1111B22PN-NYHTFG	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYI	-	S-1111B23MC-NYITFG	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYI	-	S-1111B23PN-NYITFG	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYJ	-	S-1111B24MC-NYJTFG	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYJ	-	S-1111B24PN-NYJTFG	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYK	-	S-1111B25MC-NYKTFG	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYK	-	S-1111B25PN-NYKTFG	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYL	-	S-1111B26MC-NYLTFG	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYL	-	S-1111B26PN-NYLTFG	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYM	-	S-1111B27MC-NYMTFG	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYM	-	S-1111B27PN-NYMTFG	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYN	-	S-1111B28MC-NYNTFG	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYN	-	S-1111B28PN-NYNTFG	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYO	-	S-1111B29MC-NYOTFG	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYO	-	S-1111B29PN-NYOTFG	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYP	-	S-1111B30MC-NYPTFG	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYP	-	S-1111B30PN-NYPTFG	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYQ	-	S-1111B31MC-NYQTFG	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYQ	-	S-1111B31PN-NYQTFG	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYR	-	S-1111B32MC-NYRTFG	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYR	-	S-1111B32PN-NYRTFG	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYS	-	S-1111B33MC-NYSTFG	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYS	-	S-1111B33PN-NYSTFG	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYT	-	S-1111B34MC-NYTTFG	LVR-IC	LDO, 3.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYT	-	S-1111B34PN-NYTTFG	LVR-IC	LDO, 3.4V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYU	-	S-1111B35MC-NYUTFG	LVR-IC	LDO, 3.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYU	-	S-1111B35PN-NYUTFG	LVR-IC	LDO, 3.5V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYV	-	S-1111B36MC-NYVTFG	LVR-IC	LDO, 3.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYV	-	S-1111B36PN-NYVTFG	LVR-IC	LDO, 3.6V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYW	-	S-1111B37MC-NYWTFG	LVR-IC	LDO, 3.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYW	-	S-1111B37PN-NYWTFG	LVR-IC	LDO, 3.7V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYX	-	S-1111B38MC-NYXTFG	LVR-IC	LDO, 3.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYX	-	S-1111B38PN-NYXTFG	LVR-IC	LDO, 3.8V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYY	-	S-1111B39MC-NYYTFG	LVR-IC	LDO, 3.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYY	-	S-1111B39PN-NYYTFG	LVR-IC	LDO, 3.9V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NYZ	-	S-1111B40MC-NYZTFG	LVR-IC	LDO, 4.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NYZ	-	S-1111B40PN-NYZTFG	LVR-IC	LDO, 4.0V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NZ	-	PT7M7028CHTA	Vdet-IC	2.8V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
NZ	-	TC1185-2.8VRX	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28vrx	VR7	6g	Mcc
NZ	ea	PT7M7028CHTAE	Vdet-IC	2.8V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
NZA	-	S-1111B41MC-NZATFG	LVR-IC	LDO, 4.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NZA	-	S-1111B41PN-NZATFG	LVR-IC	LDO, 4.1V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NZB	-	S-1111B42MC-NZBTFG	LVR-IC	LDO, 4.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NZB	-	S-1111B42PN-NZBTFG	LVR-IC	LDO, 4.2V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NZC	-	S-1111B43MC-NZCTFG	LVR-IC	LDO, 4.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NZC	-	S-1111B43PN-NZCTFG	LVR-IC	LDO, 4.3V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NZD	-	S-1111B44MC-NZDTFG	LVR-IC	LDO, 4.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NZD	-	S-1111B44PN-NZDTFG	LVR-IC	LDO, 4.4V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NZE	-	S-1111B45MC-NZETFG	LVR-IC	LDO, 4.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NZE	-	S-1111B45PN-NZETFG	LVR-IC	LDO, 4.5V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NZF	-	S-1111B46MC-NZFTFG	LVR-IC	LDO, 4.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NZF	-	S-1111B46PN-NZFTFG	LVR-IC	LDO, 4.6V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NZG	-	S-1111B47MC-NZGTFG	LVR-IC	LDO, 4.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NZG	-	S-1111B47PN-NZGTFG	LVR-IC	LDO, 4.7V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NZH	-	S-1111B48MC-NZHTFG	LVR-IC	LDO, 4.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NZH	-	S-1111B48PN-NZHTFG	LVR-IC	LDO, 4.8V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NZI	-	S-1111B49MC-NZITFG	LVR-IC	LDO, 4.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NZI	-	S-1111B49PN-NZITFG	LVR-IC	LDO, 4.9V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NZJ	-	S-1111B50MC-NZJTFG	LVR-IC	LDO, 5.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NZJ	-	S-1111B50PN-NZJTFG	LVR-IC	LDO, 5.0V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NZK	-	S-1111B51MC-NZKTFG	LVR-IC	LDO, 5.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NZK	-	S-1111B51PN-NZKTFG	LVR-IC	LDO, 5.1V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NZL	-	S-1111B52MC-NZLTFG	LVR-IC	LDO, 5.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NZL	-	S-1111B52PN-NZLTFG	LVR-IC	LDO, 5.2V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NZM	-	S-1111B53MC-NZMTFG	LVR-IC	LDO, 5.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NZM	-	S-1111B53PN-NZMTFG	LVR-IC	LDO, 5.3V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NZN	-	S-1111B54MC-NZNTFG	LVR-IC	LDO, 5.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NZN	-	S-1111B54PN-NZNTFG	LVR-IC	LDO, 5.4V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
NZO	-	S-1111B55MC-NZOTFG	LVR-IC	LDO, 5.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Sii
NZO	-	S-1111B55PN-NZOTFG	LVR-IC	LDO, 5.5V±1.0%, 150mA, +CE	SON-5	30vr3	VR4	6a	Sii
OA	-	PT7M7028NLTA	Vdet-IC	2.8V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
OA	ea	PT7M7028NLTAE	Vdet-IC	2.8V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
OB	-	PT7M7029CLTA	Vdet-IC	2.9V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
OB	ea	PT7M7029CLTAE	Vdet-IC	2.9V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
OC	-	PT7M7029CHTA	Vdet-IC	2.9V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
OC	ea	PT7M7029CHTAE	Vdet-IC	2.9V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
OD	-	PT7M7029NLTA	Vdet-IC	2.9V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
OD	ea	PT7M7029NLTAE	Vdet-IC	2.9V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
OE	-	PT7M7030CLTA	Vdet-IC	3.0V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
OE	ea	PT7M7030CLTAE	Vdet-IC	3.0V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
OF	-	PT7M7030CHTA	Vdet-IC	3.0V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
OF	ea	PT7M7030CHTAE	Vdet-IC	3.0V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
OG	-	PT7M7030NLTA	Vdet-IC	3.0V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
OG	ea	PT7M7030NLTAE	Vdet-IC	3.0V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
OGA	-	S-T111B15MC-OGATFG	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGB	-	S-T111B16MC-OGBTFG	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGC	-	S-T111B17MC-OGCTFG	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGD	-	S-T111B18MC-OGDTFG	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGE	-	S-T111B19MC-OGETFG	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGF	-	S-T111B20MC-OGFTFG	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGG	-	S-T111B21MC-OGGTFG	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGH	-	S-T111B22MC-OGHTFG	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGI	-	S-T111B23MC-OGITFG	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGJ	-	S-T111B24MC-OGJTFG	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGK	-	S-T111B25MC-OGKTFG	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGL	-	S-T111B26MC-OGLTFG	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGM	-	S-T111B27MC-OGMTFG	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGN	-	S-T111B28MC-OGNTFG	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGO	-	S-T111B29MC-OGOTFG	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGP	-	S-T111B30MC-OGPTFG	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGQ	-	S-T111B31MC-OGQTFG	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGR	-	S-T111B32MC-OGRTFG	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGS	-	S-T111B33MC-OGSTFG	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGT	-	S-T111B34MC-OGTTFG	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGU	-	S-T111B35MC-OGUTFG	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGV	-	S-T111B36MC-OGVTFG	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGW	-	S-T111B37MC-OGWTFG	LVR-IC	LDO, 3.7V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGX	-	S-T111B38MC-OGXTFG	LVR-IC	LDO, 3.8V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGY	-	S-T111B39MC-OGYTFG	LVR-IC	LDO, 3.9V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OGZ	-	S-T111B40MC-OGZTFG	LVR-IC	LDO, 4.0V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OH	-	PT7M7031CLTA	Vdet-IC	3.1V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
OH	ea	PT7M7031CLTAE	Vdet-IC	3.1V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
OHA	-	S-T111B41MC-OHATFG	LVR-IC	LDO, 4.1V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OHB	-	S-T111B42MC-OHBTFG	LVR-IC	LDO, 4.2V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OHC	-	S-T111B43MC-OHCTFG	LVR-IC	LDO, 4.3V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OHD	-	S-T111B44MC-OHDTFG	LVR-IC	LDO, 4.4V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OHE	-	S-T111B45MC-OHETFG	LVR-IC	LDO, 4.5V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OHF	-	S-T111B46MC-OHFTFG	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OHG	-	S-T111B47MC-OHGTFG	LVR-IC	LDO, 4.7V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OHH	-	S-T111B48MC-OHHTFG	LVR-IC	LDO, 4.8V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OHI	-	S-T111B49MC-OHITFG	LVR-IC	LDO, 4.9V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OHJ	-	S-T111B50MC-OHJTFG	LVR-IC	LDO, 5.0V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OHK	-	S-T111B51MC-OHKTFG	LVR-IC	LDO, 5.1V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OHL	-	S-T111B52MC-OHLTFG	LVR-IC	LDO, 5.2V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OHM	-	S-T111B53MC-OHMTFG	LVR-IC	LDO, 5.3V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OHN	-	S-T111B54MC-OHNTFG	LVR-IC	LDO, 5.4V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OHO	-	S-T111B55MC-OHOTFG	LVR-IC	LDO, 5.5V±1%, 150mA, +CE	SOT-23-5	28vc	VR4	6r	Sii
OI	-	PT7M7031CHTA	Vdet-IC	3.1V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
OI	ea	PT7M7031CHTAE	Vdet-IC	3.1V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
OJ	-	PT7M7031NLTA	Vdet-IC	3.1V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
OJ	ea	PT7M7031NLTAE	Vdet-IC	3.1V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
OK	-	PT7M7032CLTA	Vdet-IC	3.2V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
OK	ea	PT7M7032CLTAE	Vdet-IC	3.2V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
OL	-	PT7M7032CHTA	Vdet-IC	3.2V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
OL	ea	PT7M7032CHTAE	Vdet-IC	3.2V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
OM	-	PT7M7032NLTA	Vdet-IC	3.2V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
OM	ea	PT7M7032NLTAE	Vdet-IC	3.2V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ON	-	PT7M7033CLTA	Vdet-IC	3.3V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
ON	ea	PT7M7033CLTAE	Vdet-IC	3.3V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
OO	-	PT7M7033CHTA	Vdet-IC	3.3V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
OO	ea	PT7M7033CHTAE	Vdet-IC	3.3V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
OP	-	PT7M7033NLTA	Vdet-IC	3.3V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
OP	ea	PT7M7033NLTAE	Vdet-IC	3.3V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
OQ	-	PT7M7034CLTA	Vdet-IC	3.4V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
OQ	ea	PT7M7034CLTAE	Vdet-IC	3.4V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
OR	-	PT7M7034CHTA	Vdet-IC	3.4V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
OR	ea	PT7M7034CHTAE	Vdet-IC	3.4V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
OS	-	PT7M7034NLTA	Vdet-IC	3.4V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
OS	ea	PT7M7034NLTAE	Vdet-IC	3.4V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
OT	-	PT7M7035CLTA	Vdet-IC	3.5V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
OT	ea	PT7M7035CLTAE	Vdet-IC	3.5V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
OU	-	PT7M7035CHTA	Vdet-IC	3.5V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
OU	ea	PT7M7035CHTAE	Vdet-IC	3.5V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
OV	-	PT7M7035NLTA	Vdet-IC	3.5V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
OV	ea	PT7M7035NLTAE	Vdet-IC	3.5V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
OW	-	PT7M7036CLTA	Vdet-IC	3.6V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
OW	ea	PT7M7036CLTAE	Vdet-IC	3.6V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
OX	-	PT7M7036CHTA	Vdet-IC	3.6V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
OX	ea	PT7M7036CHTAE	Vdet-IC	3.6V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
OY	-	PT7M7036NLTA	Vdet-IC	3.6V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
OY	ea	PT7M7036NLTAE	Vdet-IC	3.6V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
OZ	-	PT7M7037CLTA	Vdet-IC	3.7V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
OZ	ea	PT7M7037CLTAE	Vdet-IC	3.7V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
P0	-	R1121N501A	LVR-IC	LDO, Low noise, 5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
P0	-	TC1186-4.0VCT713	LVR-IC	LDO, 4.0V±3%, 150mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
P0	ea	RN5RY601A	DC-DC-IC	VFM step-up, 6V±2.5%, 150mW, <180kHz	SOT-23-5	28vd	DC5	6g	Ric
P00	-	R1161N281A5	LVR-IC	LDO, 2.85V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P010	-	RP107Q102D	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P011	-	RP107Q112D	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P012	-	RP107Q122D	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P013	-	RP107Q132D	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P014	-	RP107Q142D	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P015	-	RP107Q152D	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P016	-	RP107Q162D	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P017	-	RP107Q172D	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P018	-	RP107Q182D	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P019	-	RP107Q192D	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P020	-	RP107Q202D	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P021	-	RP107Q212D	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P022	-	RP107Q222D	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P023	-	RP107Q232D	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P024	-	RP107Q242D	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P025	-	RP107Q252D	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P026	-	RP107Q262D	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P027	-	RP107Q272D	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P028	-	RP107Q282D	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P029	-	RP107Q292D	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P03	-	TC53N4002ECT	Vdet-IC	4.0V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
P030	-	RP107Q302D	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P031	-	RP107Q312D	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P032	-	RP107Q322D	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P033	-	RP107Q332D	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P034	-	RP107Q342D	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P035	-	RP107Q352D	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P036	-	RP107Q362D	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P037	-	RP107Q372D	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P038	-	RP107Q382D	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P039	-	RP107Q392D	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
p04	-	74AUP1G04GV	CMOS-Log	Inverter	SOT753	28	Log6	6a	Nxp
P040	-	RP107Q402D	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P041	-	RP107Q412D	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P042	-	RP107Q422D	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P043	-	RP107Q122D5	LVR-IC	LDO, 1.25V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P044	-	RP107Q182D5	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P045	-	RP107Q282D5	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
P08	-	R1161N081A	LVR-IC	LDO, 0.8V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P09	-	NCP585LSN09T1	LVR-IC	LDO, 0.9V±2%, 350mA, -CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P09	-	R1161N091A	LVR-IC	LDO, 0.9V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P0A	-	RP200N081B	LVR-IC	LDO, 0.8V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0A	-	XC6108N40AMR	Vdet-IC	4.0V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P0A	-	XC6118C30AMR-G	Vdet-IC	3.0V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
P0B	-	RP200N091B	LVR-IC	LDO, 0.9V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0B	-	XC6108N40BMR	Vdet-IC	4.0V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P0B	-	XC6118C30BMR-G	Vdet-IC	3.0V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
P0C	-	RP200N101B	LVR-IC	LDO, 1.0V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0C	-	XC6108N40CMR	Vdet-IC	4.0V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P0C	-	XC6118C30CMR-G	Vdet-IC	3.0V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
P0D	-	RP200N111B	LVR-IC	LDO, 1.1V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0D	-	XC6108N40DMR	Vdet-IC	4.0V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P0D	-	XC6118C30DMR-G	Vdet-IC	3.0V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
P0E	-	RP200N121B	LVR-IC	LDO, 1.2V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0F	-	RP200N131B	LVR-IC	LDO, 1.3V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0G	-	RP200N141B	LVR-IC	LDO, 1.4V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0H	-	RP200N151B	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0J	-	RP200N161B	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0K	-	RP200N171B	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0L	-	RP200N181B	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0M	-	RP200N191B	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0N	-	RP200N201B	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0P	-	RP200N211B	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0Q	-	RP200N221B	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0R	-	RP200N231B	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0S	-	RP200N241B	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0T	-	RP200N251B	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0U	-	RP200N261B	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0V	-	RP200N271B	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0W	-	RP200N281B	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0X	-	RP200N291B	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0Y	-	RP200N301B	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P0Z	-	RP200N311B	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
p1	-	BD46E421G-M	Vdet-IC	4.2V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
P1	-	TC1186-2.5VCT713	LVR-IC	LDO, 2.5V±3%, 150mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
P10	-	R1161N101A	LVR-IC	LDO, 1.0V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P10A	-	FC6204A192M	LVR-IC	LDO, 1.9V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P10A	-	ML6204A192M	LVR-IC	LDO, 1.9V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P10B	-	FC6204B192M	LVR-IC	LDO, 1.9V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P10B	-	ML6204B192M	LVR-IC	LDO, 1.9V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P10C	-	FC6204C192M	LVR-IC	LDO, 1.9V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P10C	-	ML6204C192M	LVR-IC	LDO, 1.9V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P10D	-	FC6204D192M	LVR-IC	LDO, 1.9V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P10D	-	ML6204D192M	LVR-IC	LDO, 1.9V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P11	-	R1161N111A	LVR-IC	LDO, 1.1V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P12	-	NCP585LSN12T1	LVR-IC	LDO, 1.2V±2%, 350mA, -CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons
P12	-	R1161N121A	LVR-IC	LDO, 1.2V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P13	-	R1161N131A	LVR-IC	LDO, 1.3V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P13	-	TC53N4102ECT	Vdet-IC	4.1V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
P14	-	R1161N141A	LVR-IC	LDO, 1.4V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P15	-	R1161N151A	LVR-IC	LDO, 1.5V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P15	eb	XC6368E152MR	DC-DC-IC	PWM/PFM step-up, 1.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P15A	-	CM7R151A-15B-T	LVR-IC	LDO, 1.5V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P15A	-	FC6204A152M	LVR-IC	LDO, 1.5V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P15A	-	ML6204A152M	LVR-IC	LDO, 1.5V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P15B	-	CM7R151B-15B-T	LVR-IC	LDO, 1.5V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P15B	-	FC6204B152M	LVR-IC	LDO, 1.5V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P15B	-	ML6204B152M	LVR-IC	LDO, 1.5V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P15C	-	CM7R151C-15B-T	LVR-IC	LDO, 1.5V±3%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P15C	-	FC6204C152M	LVR-IC	LDO, 1.5V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P15C	-	ML6204C152M	LVR-IC	LDO, 1.5V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P15D	-	CM7R151D-15B-T	LVR-IC	LDO, 1.5V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P15D	-	FC6204D152M	LVR-IC	LDO, 1.5V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P15D	-	ML6204D152M	LVR-IC	LDO, 1.5V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P16	-	R1161N161A	LVR-IC	LDO, 1.6V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P16	eb	XC6368E162MR	DC-DC-IC	PWM/PFM step-up, 1.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P16A	-	CM7R151A-16B-T	LVR-IC	LDO, 1.6V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P16A	-	FC6204A162M	LVR-IC	LDO, 1.6V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P16A	-	ML6204A162M	LVR-IC	LDO, 1.6V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P16B	-	CM7R151B-16B-T	LVR-IC	LDO, 1.6V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P16B	-	FC6204B162M	LVR-IC	LDO, 1.6V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P16B	-	ML6204B162M	LVR-IC	LDO, 1.6V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P16C	-	CM7R151C-16B-T	LVR-IC	LDO, 1.6V±3%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P16C	-	FC6204C162M	LVR-IC	LDO, 1.6V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P16C	-	ML6204C162M	LVR-IC	LDO, 1.6V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P16D	-	CM7R151D-16B-T	LVR-IC	LDO, 1.6V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P16D	-	FC6204D162M	LVR-IC	LDO, 1.6V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P16D	-	ML6204D162M	LVR-IC	LDO, 1.6V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P17	-	R1161N171A	LVR-IC	LDO, 1.7V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P17	eb	XC6368E172MR	DC-DC-IC	PWM/PFM step-up, 1.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P17A	-	CM7R151A-17B-T	LVR-IC	LDO, 1.7V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P17A	-	FC6204A172M	LVR-IC	LDO, 1.7V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P17A	-	ML6204A172M	LVR-IC	LDO, 1.7V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P17B	-	CM7R151B-17B-T	LVR-IC	LDO, 1.7V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P17B	-	FC6204B172M	LVR-IC	LDO, 1.7V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P17B	-	ML6204B172M	LVR-IC	LDO, 1.7V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P17C	-	CM7R151C-17B-T	LVR-IC	LDO, 1.7V±3%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P17C	-	FC6204C172M	LVR-IC	LDO, 1.7V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P17C	-	ML6204C172M	LVR-IC	LDO, 1.7V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P17D	-	CM7R151D-17B-T	LVR-IC	LDO, 1.7V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P17D	-	FC6204D172M	LVR-IC	LDO, 1.7V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P17D	-	ML6204D172M	LVR-IC	LDO, 1.7V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P18	-	NCP585LSN18T1	LVR-IC	LDO, 1.8V±2%, 350mA, -CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons
P18	-	R1161N181A	LVR-IC	LDO, 1.8V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P18	eb	XC6368E182MR	DC-DC-IC	PWM/PFM step-up, 1.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P18A	-	CM7R151A-18B-T	LVR-IC	LDO, 1.8V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P18B	-	CM7R151B-18B-T	LVR-IC	LDO, 1.8V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P18C	-	CM7R151C-18B-T	LVR-IC	LDO, 1.8V±3%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P18D	-	CM7R151D-18B-T	LVR-IC	LDO, 1.8V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P19	-	NC7SP19P6	CMOS-Log	1-of-2 decoder/demultiplexer	SC-70-5	28	Log47	6a	F
P19	-	R1161N191A	LVR-IC	LDO, 1.9V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P19	eb	XC6368E192MR	DC-DC-IC	PWM/PFM step-up, 1.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P19A	-	CM7R151A-19B-T	LVR-IC	LDO, 1.9V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P19A	-	FC6204A182M	LVR-IC	LDO, 1.8V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P19A	-	ML6204A182M	LVR-IC	LDO, 1.8V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P19B	-	CM7R151B-19B-T	LVR-IC	LDO, 1.9V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P19B	-	FC6204B182M	LVR-IC	LDO, 1.8V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P19B	-	ML6204B182M	LVR-IC	LDO, 1.8V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P19C	-	CM7R151C-19B-T	LVR-IC	LDO, 1.9V±3%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P19C	-	FC6204C182M	LVR-IC	LDO, 1.8V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P19C	-	ML6204C182M	LVR-IC	LDO, 1.8V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P19D	-	CM7R151D-19B-T	LVR-IC	LDO, 1.9V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P19D	-	FC6204D182M	LVR-IC	LDO, 1.8V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P19D	-	ML6204D182M	LVR-IC	LDO, 1.8V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P1A	-	RP200N081D	LVR-IC	LDO, 0.8V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1A	-	XC6108N41AMR	Vdet-IC	4.1V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P1A	-	XC6118C31AMR-G	Vdet-IC	3.1V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
P1B	-	RP200N091D	LVR-IC	LDO, 0.9V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1B	-	XC6108N41BMR	Vdet-IC	4.1V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P1B	-	XC6118C31BMR-G	Vdet-IC	3.1V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
P1C	-	RP200N101D	LVR-IC	LDO, 1.0V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1C	-	XC6108N41CMR	Vdet-IC	4.1V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P1C	-	XC6118C31CMR-G	Vdet-IC	3.1V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
P1D	-	RP200N111D	LVR-IC	LDO, 1.1V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1D	-	XC6108N41DMR	Vdet-IC	4.1V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P1D	-	XC6118C31DMR-G	Vdet-IC	3.1V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
P1E	-	RP200N121D	LVR-IC	LDO, 1.2V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1F	-	RP200N131D	LVR-IC	LDO, 1.3V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1F	eb	XC6368E153MR	DC-DC-IC	PWM/PFM step-up, 1.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P1FA	-	CM7R151A-15A-T	LVR-IC	LDO, 1.55V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P1FA	-	FC6204A15AM	LVR-IC	LDO, 1.55V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P1FA	-	ML6204A15AM	LVR-IC	LDO, 1.55V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P1FB	-	CM7R151B-15A-T	LVR-IC	LDO, 1.55V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P1FB	-	FC6204B15AM	LVR-IC	LDO, 1.55V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P1FB	-	ML6204B15AM	LVR-IC	LDO, 1.55V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P1FC	-	CM7R151C-15A-T	LVR-IC	LDO, 1.55V±3%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P1FC	-	FC6204C15AM	LVR-IC	LDO, 1.55V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P1FC	-	ML6204C15AM	LVR-IC	LDO, 1.55V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P1FD	-	CM7R151D-15A-T	LVR-IC	LDO, 1.55V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P1FD	-	FC6204D15AM	LVR-IC	LDO, 1.55V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P1FD	-	ML6204D15AM	LVR-IC	LDO, 1.55V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P1G	-	RP200N141D	LVR-IC	LDO, 1.4V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1GA	-	CM7R151A-16A-T	LVR-IC	LDO, 1.65V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P1GA	-	FC6204A16AM	LVR-IC	LDO, 1.65V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P1GA	-	ML6204A16AM	LVR-IC	LDO, 1.65V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P1GB	-	CM7R151B-16A-T	LVR-IC	LDO, 1.65V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P1GB	-	FC6204B16AM	LVR-IC	LDO, 1.65V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P1GB	-	ML6204B16AM	LVR-IC	LDO, 1.65V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P1GC	-	CM7R151C-16A-T	LVR-IC	LDO, 1.65V±3%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P1GC	-	FC6204C16AM	LVR-IC	LDO, 1.65V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P1GC	-	ML6204C16AM	LVR-IC	LDO, 1.65V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P1GD	-	CM7R151D-16A-T	LVR-IC	LDO, 1.65V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P1GD	-	FC6204D16AM	LVR-IC	LDO, 1.65V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P1GD	-	ML6204D16AM	LVR-IC	LDO, 1.65V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P1H	-	RP200N151D	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1H	eb	XC6368E163MR	DC-DC-IC	PWM/PFM step-up, 1.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P1HA	-	CM7R151A-17A-T	LVR-IC	LDO, 1.75V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P1HA	-	FC6204A17AM	LVR-IC	LDO, 1.75V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P1HA	-	ML6204A17AM	LVR-IC	LDO, 1.75V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P1HB	-	CM7R151B-17A-T	LVR-IC	LDO, 1.75V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P1HB	-	FC6204B17AM	LVR-IC	LDO, 1.75V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P1HB	-	ML6204B17AM	LVR-IC	LDO, 1.75V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P1HC	-	CM7R151C-17A-T	LVR-IC	LDO, 1.75V±3%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P1HC	-	FC6204C17AM	LVR-IC	LDO, 1.75V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P1HC	-	ML6204C17AM	LVR-IC	LDO, 1.75V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P1HD	-	CM7R151D-17A-T	LVR-IC	LDO, 1.75V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P1HD	-	FC6204D17AM	LVR-IC	LDO, 1.75V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P1HD	-	ML6204D17AM	LVR-IC	LDO, 1.75V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P1IA	-	CM7R151A-18A-T	LVR-IC	LDO, 1.85V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P1IA	-	FC6204A18AM	LVR-IC	LDO, 1.85V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P1IA	-	ML6204A18AM	LVR-IC	LDO, 1.85V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P1IB	-	CM7R151B-18A-T	LVR-IC	LDO, 1.85V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P1IB	-	FC6204B18AM	LVR-IC	LDO, 1.85V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P1IB	-	ML6204B18AM	LVR-IC	LDO, 1.85V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P1IC	-	CM7R151C-18A-T	LVR-IC	LDO, 1.85V±3%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P1IC	-	FC6204C18AM	LVR-IC	LDO, 1.85V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P1IC	-	ML6204C18AM	LVR-IC	LDO, 1.85V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P1ID	-	CM7R151D-18A-T	LVR-IC	LDO, 1.85V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P1ID	-	FC6204D18AM	LVR-IC	LDO, 1.85V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P1ID	-	ML6204D18AM	LVR-IC	LDO, 1.85V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P1J	-	RP200N161D	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1JA	-	CM7R151A-19A-T	LVR-IC	LDO, 1.95V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P1JA	-	FC6204A19AM	LVR-IC	LDO, 1.95V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P1JA	-	ML6204A19AM	LVR-IC	LDO, 1.95V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P1JB	-	CM7R151B-19A-T	LVR-IC	LDO, 1.95V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P1JB	-	FC6204B19AM	LVR-IC	LDO, 1.95V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P1JB	-	ML6204B19AM	LVR-IC	LDO, 1.95V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P1JC	-	CM7R151C-19A-T	LVR-IC	LDO, 1.95V±3%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P1JC	-	FC6204C19AM	LVR-IC	LDO, 1.95V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P1JC	-	ML6204C19AM	LVR-IC	LDO, 1.95V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P1JD	-	CM7R151D-19A-T	LVR-IC	LDO, 1.95V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P1JD	-	FC6204D19AM	LVR-IC	LDO, 1.95V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P1JD	-	ML6204D19AM	LVR-IC	LDO, 1.95V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P1K	-	RP200N171D	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1K	eb	XC6368E173MR	DC-DC-IC	PWM/PFM step-up, 1.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P1L	-	RP200N181D	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1L	eb	XC6368E183MR	DC-DC-IC	PWM/PFM step-up, 1.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P1M	-	RP200N191D	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1M	eb	XC6368E193MR	DC-DC-IC	PWM/PFM step-up, 1.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P1N	-	RP200N201D	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1P	-	RP200N211D	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1Q	-	RP200N221D	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1R	-	RP200N231D	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1S	-	RP200N241D	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1T	-	RP200N251D	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1U	-	RP200N261D	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1V	-	RP200N271D	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1W	-	RP200N281D	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1X	-	RP200N291D	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
P1Y	-	RP200N301D	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P1Z	-	RP200N311D	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
p2	-	74AUP1G240GW	CMOS-Log	Bus buffer inverted with 3–state output	SOT-353-1	28	Log22	6a	Nxp
p2	-	BD46E431G-M	Vdet-IC	4.3V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
P2	-	KRA566E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=1k/10k	TESV	30/TD9	TD9	6l	Kec
P2	-	KRA566U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=1k/10k	USV	28	TD9	6l	Kec
P2	-	TC1186-2.7VCT713	LVR-IC	LDO, 2.7V±3%, 150mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
P20	-	R1161N201A	LVR-IC	LDO, 2.0V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P20	eb	XC6368E202MR	DC-DC-IC	PWM/PFM step-up, 2.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P20	eh	XC6382F201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P20A	-	CM7R151A-20B-T	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P20A	-	FC6204A202M	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P20A	-	ML6204A202M	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P20B	-	CM7R151B-20B-T	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P20B	-	FC6204B202M	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P20B	-	ML6204B202M	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P20C	-	CM7R151C-20B-T	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P20C	-	FC6204C202M	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P20C	-	ML6204C202M	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P20D	-	CM7R151D-20B-T	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P20D	-	FC6204D202M	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P20D	-	ML6204D202M	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P21	-	R1161N211A	LVR-IC	LDO, 2.1V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P21	eb	XC6368E212MR	DC-DC-IC	PWM/PFM step-up, 2.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P21	eh	XC6382F211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P21A	-	CM7R151A-21B-T	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P21A	-	FC6204A212M	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P21A	-	ML6204A212M	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P21B	-	CM7R151B-21B-T	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P21B	-	FC6204B212M	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P21B	-	ML6204B212M	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P21C	-	CM7R151C-21B-T	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P21C	-	FC6204C212M	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P21C	-	ML6204C212M	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P21D	-	CM7R151D-21B-T	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P21D	-	FC6204D212M	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P21D	-	ML6204D212M	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P22	-	R1161N221A	LVR-IC	LDO, 2.2V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P22	eb	XC6368E222MR	DC-DC-IC	PWM/PFM step-up, 2.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P22	eh	XC6382F221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P22A	-	CM7R151A-22B-T	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P22A	-	FC6204A222M	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P22A	-	ML6204A222M	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P22B	-	CM7R151B-22B-T	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P22B	-	FC6204B222M	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P22B	-	ML6204B222M	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P22C	-	CM7R151C-22B-T	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P22C	-	FC6204C222M	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P22C	-	ML6204C222M	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P22D	-	CM7R151D-22B-T	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P22D	-	FC6204D222M	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P22D	-	ML6204D222M	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P23	-	R1161N231A	LVR-IC	LDO, 2.3V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P23	-	TC53N4202ECT	Vdet-IC	4.2V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
P23	eb	XC6368E232MR	DC-DC-IC	PWM/PFM step-up, 2.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P23	eh	XC6382F231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P23A	-	CM7R151A-23B-T	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P23A	-	FC6204A232M	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P23A	-	ML6204A232M	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P23B	-	CM7R151B-23B-T	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P23B	-	FC6204B232M	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P23B	-	ML6204B232M	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P23C	-	CM7R151C-23B-T	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P23C	-	FC6204C232M	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P23C	-	ML6204C232M	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P23D	-	CM7R151D-23B-T	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P23D	-	FC6204D232M	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P23D	-	ML6204D232M	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P24	-	R1161N241A	LVR-IC	LDO, 2.4V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P24	eb	XC6368E242MR	DC-DC-IC	PWM/PFM step-up, 2.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P24	eh	XC6382F241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P24A	-	CM7R151A-24B-T	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P24A	-	FC6204A242M	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P24A	-	ML6204A242M	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P24B	-	CM7R151B-24B-T	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P24B	-	FC6204B242M	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P24B	-	ML6204B242M	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P24C	-	CM7R151C-24B-T	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P24C	-	FC6204C242M	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P24C	-	ML6204C242M	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P24D	-	CM7R151D-24B-T	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P24D	-	FC6204D242M	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P24D	-	ML6204D242M	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P25	-	R1161N251A	LVR-IC	LDO, 2.5V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P25	eb	XC6368E252MR	DC-DC-IC	PWM/PFM step-up, 2.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P25	eh	XC6382F251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P25A	-	CM7R151A-25B-T	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P25A	-	FC6204A252M	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P25A	-	ML6204A252M	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P25B	-	CM7R151B-25B-T	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P25B	-	FC6204B252M	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P25B	-	ML6204B252M	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P25C	-	CM7R151C-25B-T	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P25C	-	FC6204C252M	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P25C	-	ML6204C252M	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P25D	-	CM7R151D-25B-T	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P25D	-	FC6204D252M	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P25D	-	ML6204D252M	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P26	-	R1161N261A	LVR-IC	LDO, 2.6V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P26	eb	XC6368E262MR	DC-DC-IC	PWM/PFM step-up, 2.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P26	eh	XC6382F261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P26A	-	CM7R151A-26B-T	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P26A	-	FC6204A262M	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P26A	-	ML6204A262M	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P26B	-	CM7R151B-26B-T	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P26B	-	FC6204B262M	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P26B	-	ML6204B262M	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P26C	-	CM7R151C-26B-T	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P26C	-	FC6204C262M	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P26C	-	ML6204C262M	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P26D	-	CM7R151D-26B-T	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P26D	-	FC6204D262M	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P26D	-	ML6204D262M	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P27	-	R1161N271A	LVR-IC	LDO, 2.7V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P27	eb	XC6368E272MR	DC-DC-IC	PWM/PFM step-up, 2.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P27	eh	XC6382F271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P27A	-	CM7R151A-27B-T	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P27A	-	FC6204A272M	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P27A	-	ML6204A272M	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P27B	-	CM7R151B-27B-T	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P27B	-	FC6204B272M	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P27B	-	ML6204B272M	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P27C	-	CM7R151C-27B-T	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P27C	-	FC6204C272M	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P27C	-	ML6204C272M	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P27D	-	CM7R151D-27B-T	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P27D	-	FC6204D272M	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P27D	-	ML6204D272M	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P28	-	NCP4561SNT1-28	LVR-IC	LDO, ULN, +CE, 2.8V±1.5%, 80mA	SOT-23-5	28vc	VR4	6b	Ons
P28	-	R1161N281A	LVR-IC	LDO, 2.8V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P28	eb	XC6368E282MR	DC-DC-IC	PWM/PFM step-up, 2.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P28	eh	XC6382F281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P28A	-	CM7R151A-28B-T	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P28A	-	FC6204A282M	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P28A	-	ML6204A282M	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P28B	-	CM7R151B-28B-T	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P28B	-	FC6204B282M	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P28B	-	ML6204B282M	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P28C	-	CM7R151C-28B-T	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P28C	-	FC6204C282M	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P28C	-	ML6204C282M	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P28D	-	CM7R151D-28B-T	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P28D	-	FC6204D282M	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P28D	-	ML6204D282M	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P29	-	R1161N291A	LVR-IC	LDO, 2.9V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P29	eb	XC6368E292MR	DC-DC-IC	PWM/PFM step-up, 2.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P29	eh	XC6382F291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P29A	-	CM7R151A-29B-T	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P29A	-	FC6204A292M	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P29A	-	ML6204A292M	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P29B	-	CM7R151B-29B-T	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P29B	-	FC6204B292M	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P29B	-	ML6204B292M	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P29C	-	CM7R151C-29B-T	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P29C	-	FC6204C292M	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P29C	-	ML6204C292M	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P29D	-	CM7R151D-29B-T	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P29D	-	FC6204D292M	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P29D	-	ML6204D292M	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P2A	-	S-1167A15-M5T1G	LVR-IC	LDO, 1.5V±1.0%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Sii
P2A	-	XC6108N42AMR	Vdet-IC	4.2V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P2A	-	XC6118C32AMR-G	Vdet-IC	3.2V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
P2A	eb	XC6368E203MR	DC-DC-IC	PWM/PFM step-up, 2.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P2AA	-	CM7R151A-20A-T	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2AA	-	FC6204A20AM	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P2AA	-	ML6204A20AM	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P2AB	-	CM7R151B-20A-T	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P2AB	-	FC6204B20AM	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P2AB	-	ML6204B20AM	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P2AC	-	CM7R151C-20A-T	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2AC	-	FC6204C20AM	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P2AC	-	ML6204C20AM	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P2AD	-	CM7R151D-20A-T	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P2AD	-	FC6204D20AM	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P2AD	-	ML6204D20AM	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P2B	-	XC6108N42BMR	Vdet-IC	4.2V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P2B	-	XC6118C32BMR-G	Vdet-IC	3.2V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
P2B	eb	XC6368E213MR	DC-DC-IC	PWM/PFM step-up, 2.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P2BA	-	CM7R151A-21A-T	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2BA	-	FC6204A21AM	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P2BA	-	ML6204A21AM	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P2BB	-	CM7R151B-21A-T	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P2BB	-	FC6204B21AM	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P2BB	-	ML6204B21AM	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P2BC	-	CM7R151C-21A-T	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2BC	-	FC6204C21AM	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P2BC	-	ML6204C21AM	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P2BD	-	CM7R151D-21A-T	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P2BD	-	FC6204D21AM	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P2BD	-	ML6204D21AM	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P2C	-	XC6108N42CMR	Vdet-IC	4.2V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P2C	-	XC6118C32CMR-G	Vdet-IC	3.2V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
P2C	eb	XC6368E223MR	DC-DC-IC	PWM/PFM step-up, 2.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P2CA	-	CM7R151A-22A-T	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2CA	-	FC6204A22AM	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P2CA	-	ML6204A22AM	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P2CB	-	CM7R151B-22A-T	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P2CB	-	FC6204B22AM	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P2CB	-	ML6204B22AM	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P2CC	-	CM7R151C-22A-T	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2CC	-	FC6204C22AM	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P2CC	-	ML6204C22AM	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P2CD	-	CM7R151D-22A-T	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P2CD	-	FC6204D22AM	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P2CD	-	ML6204D22AM	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P2D	-	XC6108N42DMR	Vdet-IC	4.2V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P2D	-	XC6118C32DMR-G	Vdet-IC	3.2V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
P2D	eb	XC6368E233MR	DC-DC-IC	PWM/PFM step-up, 2.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P2DA	-	CM7R151A-23A-T	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2DA	-	FC6204A23AM	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P2DA	-	ML6204A23AM	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P2DB	-	CM7R151B-23A-T	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P2DB	-	FC6204B23AM	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P2DB	-	ML6204B23AM	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P2DC	-	CM7R151C-23A-T	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2DC	-	FC6204C23AM	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P2DC	-	ML6204C23AM	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P2DD	-	CM7R151D-23A-T	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P2DD	-	FC6204D23AM	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P2DD	-	ML6204D23AM	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P2E	-	S-1167A19-M5T1G	LVR-IC	LDO, 1.9V±1.0%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Sii
P2E	eb	XC6368E243MR	DC-DC-IC	PWM/PFM step-up, 2.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P2EA	-	CM7R151A-24A-T	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2EA	-	FC6204A24AM	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P2EA	-	ML6204A24AM	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P2EB	-	CM7R151B-24A-T	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P2EB	-	FC6204B24AM	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P2EB	-	ML6204B24AM	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P2EC	-	CM7R151C-24A-T	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2EC	-	FC6204C24AM	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P2EC	-	ML6204C24AM	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P2ED	-	CM7R151D-24A-T	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P2ED	-	FC6204D24AM	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P2ED	-	ML6204D24AM	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P2F	eb	XC6368E253MR	DC-DC-IC	PWM/PFM step-up, 2.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P2FA	-	CM7R151A-25A-T	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2FA	-	FC6204A25AM	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P2FA	-	ML6204A25AM	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P2FB	-	CM7R151B-25A-T	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P2FB	-	FC6204B25AM	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P2FB	-	ML6204B25AM	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P2FC	-	CM7R151C-25A-T	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2FC	-	FC6204C25AM	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P2FC	-	ML6204C25AM	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P2FD	-	CM7R151D-25A-T	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P2FD	-	FC6204D25AM	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P2FD	-	ML6204D25AM	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P2GA	-	CM7R151A-26A-T	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2GA	-	FC6204A26AM	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P2GA	-	ML6204A26AM	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P2GB	-	CM7R151B-26A-T	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P2GB	-	FC6204B26AM	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P2GB	-	ML6204B26AM	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P2GC	-	CM7R151C-26A-T	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2GC	-	FC6204C26AM	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P2GC	-	ML6204C26AM	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P2GD	-	CM7R151D-26A-T	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P2GD	-	FC6204D26AM	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P2GD	-	ML6204D26AM	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P2H	eb	XC6368E263MR	DC-DC-IC	PWM/PFM step-up, 2.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P2HA	-	CM7R151A-27A-T	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2HA	-	FC6204A27AM	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P2HA	-	ML6204A27AM	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P2HB	-	CM7R151B-27A-T	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P2HB	-	FC6204B27AM	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P2HB	-	ML6204B27AM	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P2HC	-	CM7R151C-27A-T	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2HC	-	FC6204C27AM	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P2HC	-	ML6204C27AM	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P2HD	-	CM7R151D-27A-T	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P2HD	-	FC6204D27AM	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P2HD	-	ML6204D27AM	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P2IA	-	CM7R151A-28A-T	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2IA	-	FC6204A28AM	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P2IA	-	ML6204A28AM	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P2IB	-	CM7R151B-28A-T	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P2IB	-	FC6204B28AM	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P2IB	-	ML6204B28AM	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P2IC	-	CM7R151C-28A-T	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2IC	-	FC6204C28AM	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P2IC	-	ML6204C28AM	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P2ID	-	CM7R151D-28A-T	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P2ID	-	FC6204D28AM	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P2ID	-	ML6204D28AM	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P2JA	-	CM7R151A-29A-T	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2JA	-	FC6204A29AM	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P2JA	-	ML6204A29AM	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P2JB	-	CM7R151B-29A-T	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P2JB	-	FC6204B29AM	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P2JB	-	ML6204B29AM	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P2JC	-	CM7R151C-29A-T	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P2JC	-	FC6204C29AM	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P2JC	-	ML6204C29AM	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P2JD	-	CM7R151D-29A-T	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P2JD	-	FC6204D29AM	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P2JD	-	ML6204D29AM	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P2K	eb	XC6368E273MR	DC-DC-IC	PWM/PFM step-up, 2.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P2L	eb	XC6368E283MR	DC-DC-IC	PWM/PFM step-up, 2.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P2M	eb	XC6368E293MR	DC-DC-IC	PWM/PFM step-up, 2.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P2P	-	S-1167A30-M5T1G	LVR-IC	LDO, 3.0V±1.0%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Sii
P2S	-	S-1167A33-M5T1G	LVR-IC	LDO, 3.3V±1.0%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Sii
p3	-	BD46E441G-M	Vdet-IC	4.4V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
P3	-	TC1186-3.0VCT713	LVR-IC	LDO, 3.0V±3%, 150mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
P30	-	R1161N301A	LVR-IC	LDO, 3.0V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P30	eb	XC6368E302MR	DC-DC-IC	PWM/PFM step-up, 3.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P30	eh	XC6382F301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P30A	-	CM7R151A-30B-T	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P30A	-	FC6204A302M	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P30A	-	ML6204A302M	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P30B	-	CM7R151B-30B-T	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P30B	-	FC6204B302M	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P30B	-	ML6204B302M	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P30C	-	CM7R151C-30B-T	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P30C	-	FC6204C302M	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P30C	-	ML6204C302M	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P30D	-	CM7R151D-30B-T	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P30D	-	FC6204D302M	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P30D	-	ML6204D302M	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P31	-	R1161N311A	LVR-IC	LDO, 3.1V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P31	eb	XC6368E312MR	DC-DC-IC	PWM/PFM step-up, 3.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P31	eh	XC6382F311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P31A	-	CM7R151A-31B-T	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P31A	-	FC6204A312M	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P31A	-	ML6204A312M	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P31B	-	CM7R151B-31B-T	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P31B	-	FC6204B312M	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P31B	-	ML6204B312M	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P31C	-	CM7R151C-31B-T	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P31C	-	FC6204C312M	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P31C	-	ML6204C312M	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P31D	-	CM7R151D-31B-T	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P31D	-	FC6204D312M	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P31D	-	ML6204D312M	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P32	-	NC7SP32P5	CMOS-Log	2-input OR gate	SC-70-5	28	Log4	6a	F
P32	-	R1161N321A	LVR-IC	LDO, 3.2V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P32	eb	XC6368E322MR	DC-DC-IC	PWM/PFM step-up, 3.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P32	eh	XC6382F321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P32A	-	CM7R151A-32B-T	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P32A	-	FC6204A322M	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P32A	-	ML6204A322M	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P32B	-	CM7R151B-32B-T	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P32B	-	FC6204B322M	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P32B	-	ML6204B322M	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P32C	-	CM7R151C-32B-T	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P32C	-	FC6204C322M	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P32C	-	ML6204C322M	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P32D	-	CM7R151D-32B-T	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P32D	-	FC6204D322M	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P32D	-	ML6204D322M	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P33	-	R1161N331A	LVR-IC	LDO, 3.3V±2%, 350mA, -CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
P33	-	TC53N4302ECT	Vdet-IC	4.3V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P33	eb	XC6368E332MR	DC-DC-IC	PWM/PFM step-up, 3.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P33	eh	XC6382F331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P33A	-	CM7R151A-33B-T	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P33A	-	FC6204A332M	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P33A	-	ML6204A332M	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P33B	-	CM7R151B-33B-T	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P33B	-	FC6204B332M	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P33B	-	ML6204B332M	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P33C	-	CM7R151C-33B-T	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P33C	-	FC6204C332M	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P33C	-	ML6204C332M	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P33D	-	CM7R151D-33B-T	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P33D	-	FC6204D332M	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P33D	-	ML6204D332M	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P34	eb	XC6368E342MR	DC-DC-IC	PWM/PFM step-up, 3.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P34	eh	XC6382F341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P34A	-	CM7R151A-34B-T	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P34A	-	FC6204A342M	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P34A	-	ML6204A342M	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P34B	-	CM7R151B-34B-T	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P34B	-	FC6204B342M	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P34B	-	ML6204B342M	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P34C	-	CM7R151C-34B-T	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P34C	-	FC6204C342M	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P34C	-	ML6204C342M	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P34D	-	CM7R151D-34B-T	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P34D	-	FC6204D342M	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P34D	-	ML6204D342M	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P35	eb	XC6368E352MR	DC-DC-IC	PWM/PFM step-up, 3.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P35	eh	XC6382F351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P35A	-	CM7R151A-35B-T	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P35A	-	FC6204A352M	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P35A	-	ML6204A352M	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P35B	-	CM7R151B-35B-T	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P35B	-	FC6204B352M	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P35B	-	ML6204B352M	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P35C	-	CM7R151C-35B-T	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P35C	-	FC6204C352M	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P35C	-	ML6204C352M	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P35D	-	CM7R151D-35B-T	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P35D	-	FC6204D352M	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P35D	-	ML6204D352M	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P36	eb	XC6368E362MR	DC-DC-IC	PWM/PFM step-up, 3.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P36	eh	XC6382F361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P36A	-	CM7R151A-36B-T	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P36A	-	FC6204A362M	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P36A	-	ML6204A362M	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P36B	-	CM7R151B-36B-T	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P36B	-	FC6204B362M	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P36B	-	ML6204B362M	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P36C	-	CM7R151C-36B-T	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P36C	-	FC6204C362M	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P36C	-	ML6204C362M	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P36D	-	CM7R151D-36B-T	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P36D	-	FC6204D362M	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P36D	-	ML6204D362M	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P37	eb	XC6368E372MR	DC-DC-IC	PWM/PFM step-up, 3.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P37	eh	XC6382F371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P37A	-	CM7R151A-37B-T	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDRV	SOT-23-5	28cx	VR4	6a	Can
P37A	-	FC6204A372M	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P37A	-	ML6204A372M	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P37B	-	CM7R151B-37B-T	LVR-IC	LDO, 3.7V±2%, 150mA, +CEV	SOT-23-5	28cx	VR4	6a	Can
P37B	-	FC6204B372M	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P37B	-	ML6204B372M	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P37C	-	CM7R151C-37B-T	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PDRV	SOT-23-5	28cx	VR4	6a	Can
P37C	-	FC6204C372M	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P37C	-	ML6204C372M	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P37D	-	CM7R151D-37B-T	LVR-IC	LDO, 3.7V±2%, 150mA, -CEV	SOT-23-5	28cx	VR4	6a	Can
P37D	-	FC6204D372M	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P37D	-	ML6204D372M	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P38	-	NC7SP38P5	CMOS-Log	2-input NAND gate (ODO)	SC-70-5	28	Log17	6a	F
P38	eb	XC6368E382MR	DC-DC-IC	PWM/PFM step-up, 3.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P38	eh	XC6382F381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P38A	-	CM7R151A-38B-T	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P38A	-	FC6204A382M	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P38A	-	ML6204A382M	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P38B	-	CM7R151B-38B-T	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P38B	-	FC6204B382M	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P38B	-	ML6204B382M	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P38C	-	CM7R151C-38B-T	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P38C	-	FC6204C382M	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P38C	-	ML6204C382M	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P38D	-	CM7R151D-38B-T	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P38D	-	FC6204D382M	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P38D	-	ML6204D382M	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P39	eb	XC6368E392MR	DC-DC-IC	PWM/PFM step-up, 3.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P39	eh	XC6382F391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P39A	-	CM7R151A-39B-T	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P39A	-	FC6204A392M	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P39A	-	ML6204A392M	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P39B	-	CM7R151B-39B-T	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P39B	-	FC6204B392M	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P39B	-	ML6204B392M	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P39C	-	CM7R151C-39B-T	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P39C	-	FC6204C392M	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P39C	-	ML6204C392M	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P39D	-	CM7R151D-39B-T	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P39D	-	FC6204D392M	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P39D	-	ML6204D392M	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P3A	-	XC6108N43AMR	Vdet-IC	4.3V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P3A	-	XC6118C33AMR-G	Vdet-IC	3.3V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
P3A	eb	XC6368E303MR	DC-DC-IC	PWM/PFM step-up, 3.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P3AA	-	CM7R151A-30A-T	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3AA	-	FC6204A30AM	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P3AA	-	ML6204A30AM	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P3AB	-	CM7R151B-30A-T	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P3AB	-	FC6204B30AM	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P3AB	-	ML6204B30AM	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P3AC	-	CM7R151C-30A-T	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3AC	-	FC6204C30AM	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P3AC	-	ML6204C30AM	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P3AD	-	CM7R151D-30A-T	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P3AD	-	FC6204D30AM	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P3AD	-	ML6204D30AM	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P3B	-	XC6108N43BMR	Vdet-IC	4.3V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P3B	-	XC6118C33BMR-G	Vdet-IC	3.3V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
P3B	eb	XC6368E313MR	DC-DC-IC	PWM/PFM step-up, 3.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P3BA	-	CM7R151A-31A-T	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3BA	-	FC6204A31AM	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P3BA	-	ML6204A31AM	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P3BB	-	CM7R151B-31A-T	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P3BB	-	FC6204B31AM	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P3BB	-	ML6204B31AM	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P3BC	-	CM7R151C-31A-T	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3BC	-	FC6204C31AM	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P3BC	-	ML6204C31AM	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P3BD	-	CM7R151D-31A-T	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P3BD	-	FC6204D31AM	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P3BD	-	ML6204D31AM	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P3C	-	XC6108N43CMR	Vdet-IC	4.3V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P3C	-	XC6118C33CMR-G	Vdet-IC	3.3V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
P3C	eb	XC6368E323MR	DC-DC-IC	PWM/PFM step-up, 3.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P3CA	-	CM7R151A-32A-T	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3CA	-	FC6204A32AM	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P3CA	-	ML6204A32AM	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P3CB	-	CM7R151B-32A-T	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P3CB	-	FC6204B32AM	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P3CB	-	ML6204B32AM	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P3CC	-	CM7R151C-32A-T	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3CC	-	FC6204C32AM	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P3CC	-	ML6204C32AM	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P3CD	-	CM7R151D-32A-T	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P3CD	-	FC6204D32AM	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P3CD	-	ML6204D32AM	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P3D	-	XC6108N43DMR	Vdet-IC	4.3V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P3D	-	XC6118C33DMR-G	Vdet-IC	3.3V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
P3D	eb	XC6368E333MR	DC-DC-IC	PWM/PFM step-up, 3.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P3DA	-	CM7R151A-33A-T	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3DA	-	FC6204A33AM	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P3DA	-	ML6204A33AM	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P3DB	-	CM7R151B-33A-T	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P3DB	-	FC6204B33AM	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P3DB	-	ML6204B33AM	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P3DC	-	CM7R151C-33A-T	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3DC	-	FC6204C33AM	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P3DC	-	ML6204C33AM	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P3DD	-	CM7R151D-33A-T	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P3DD	-	FC6204D33AM	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P3DD	-	ML6204D33AM	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P3E	eb	XC6368E343MR	DC-DC-IC	PWM/PFM step-up, 3.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P3EA	-	CM7R151A-34A-T	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3EA	-	FC6204A34AM	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P3EA	-	ML6204A34AM	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P3EB	-	CM7R151B-34A-T	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P3EB	-	FC6204B34AM	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P3EB	-	ML6204B34AM	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P3EC	-	CM7R151C-34A-T	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3EC	-	FC6204C34AM	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P3EC	-	ML6204C34AM	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P3ED	-	CM7R151D-34A-T	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P3ED	-	FC6204D34AM	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P3ED	-	ML6204D34AM	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P3F	eb	XC6368E353MR	DC-DC-IC	PWM/PFM step-up, 3.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P3FA	-	CM7R151A-35A-T	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3FA	-	FC6204A35AM	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P3FA	-	ML6204A35AM	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P3FB	-	CM7R151B-35A-T	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P3FB	-	FC6204B35AM	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P3FB	-	ML6204B35AM	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P3FC	-	CM7R151C-35A-T	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3FC	-	FC6204C35AM	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P3FC	-	ML6204C35AM	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P3FD	-	CM7R151D-35A-T	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P3FD	-	FC6204D35AM	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P3FD	-	ML6204D35AM	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P3GA	-	CM7R151A-36A-T	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3GA	-	FC6204A36AM	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P3GA	-	ML6204A36AM	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P3GB	-	CM7R151B-36A-T	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P3GB	-	FC6204B36AM	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P3GB	-	ML6204B36AM	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P3GC	-	CM7R151C-36A-T	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3GC	-	FC6204C36AM	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P3GC	-	ML6204C36AM	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P3GD	-	CM7R151D-36A-T	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P3GD	-	FC6204D36AM	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P3GD	-	ML6204D36AM	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P3H	eb	XC6368E363MR	DC-DC-IC	PWM/PFM step-up, 3.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P3HA	-	CM7R151A-37A-T	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3HA	-	FC6204A37AM	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P3HA	-	ML6204A37AM	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P3HB	-	CM7R151B-37A-T	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P3HB	-	FC6204B37AM	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P3HB	-	ML6204B37AM	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P3HC	-	CM7R151C-37A-T	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3HC	-	FC6204C37AM	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P3HC	-	ML6204C37AM	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P3HD	-	CM7R151D-37A-T	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P3HD	-	FC6204D37AM	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P3HD	-	ML6204D37AM	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P3IA	-	CM7R151A-38A-T	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3IA	-	FC6204A38AM	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P3IA	-	ML6204A38AM	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P3IB	-	CM7R151B-38A-T	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P3IB	-	FC6204B38AM	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P3IB	-	ML6204B38AM	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P3IC	-	CM7R151C-38A-T	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3IC	-	FC6204C38AM	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P3IC	-	ML6204C38AM	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P3ID	-	CM7R151D-38A-T	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P3ID	-	FC6204D38AM	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P3ID	-	ML6204D38AM	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P3J	-	S-1167A50-M5T1G	LVR-IC	LDO, 5.0V±1.0%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Sii
P3JA	-	CM7R151A-39A-T	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3JA	-	FC6204A39AM	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P3JA	-	ML6204A39AM	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P3JB	-	CM7R151B-39A-T	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P3JB	-	FC6204B39AM	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P3JB	-	ML6204B39AM	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P3JC	-	CM7R151C-39A-T	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P3JC	-	FC6204C39AM	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P3JC	-	ML6204C39AM	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P3JD	-	CM7R151D-39A-T	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P3JD	-	FC6204D39AM	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P3JD	-	ML6204D39AM	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P3K	eb	XC6368E373MR	DC-DC-IC	PWM/PFM step-up, 3.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P3L	eb	XC6368E383MR	DC-DC-IC	PWM/PFM step-up, 3.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P3M	eb	XC6368E393MR	DC-DC-IC	PWM/PFM step-up, 3.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P3P	-	S-1167A1J-M5T1G	LVR-IC	LDO, 1.85V±1.0%, 150mA, -CE	SOT-23-5	28cx	VR4	6g	Sii
p4	-	BD46E451G-M	Vdet-IC	4.5V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
P4	-	KRA567E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	TESV	30/TD9	TD9	6l	Kec
P4	-	KRA567U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	USV	28	TD9	6l	Kec
P4	-	KTA501F-Y	Si-pnp	Dual GP, 50V, 150mA, 100mW, B=120..240, 80MHz	TFSV	30/T12	T12	6l	Kec
P40	eb	XC6368E402MR	DC-DC-IC	PWM/PFM step-up, 4.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P40	eh	XC6382F401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P40A	-	CM7R151A-40B-T	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P40A	-	FC6204A402M	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P40A	-	ML6204A402M	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P40B	-	CM7R151B-40B-T	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P40B	-	FC6204B402M	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P40B	-	ML6204B402M	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P40C	-	CM7R151C-40B-T	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P40C	-	FC6204C402M	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P40C	-	ML6204C402M	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P40D	-	CM7R151D-40B-T	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P40D	-	FC6204D402M	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P40D	-	ML6204D402M	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P41	eb	XC6368E412MR	DC-DC-IC	PWM/PFM step-up, 4.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P41	eh	XC6382F411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P41A	-	CM7R151A-41B-T	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P41A	-	FC6204A412M	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P41A	-	ML6204A412M	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P41B	-	CM7R151B-41B-T	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P41B	-	FC6204B412M	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P41B	-	ML6204B412M	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P41C	-	CM7R151C-41B-T	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P41C	-	FC6204C412M	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P41C	-	ML6204C412M	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P41D	-	CM7R151D-41B-T	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P41D	-	FC6204D412M	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P41D	-	ML6204D412M	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P42	eb	XC6368E422MR	DC-DC-IC	PWM/PFM step-up, 4.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P42	eh	XC6382F421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P42A	-	CM7R151A-42B-T	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P42A	-	FC6204A422M	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P42A	-	ML6204A422M	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P42B	-	CM7R151B-42B-T	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P42B	-	FC6204B422M	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P42B	-	ML6204B422M	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P42C	-	CM7R151C-42B-T	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P42C	-	FC6204C422M	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P42C	-	ML6204C422M	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P42D	-	CM7R151D-42B-T	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P42D	-	FC6204D422M	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P42D	-	ML6204D422M	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P43	-	TC53N4402ECT	Vdet-IC	4.4V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
P43	eb	XC6368E432MR	DC-DC-IC	PWM/PFM step-up, 4.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P43	eh	XC6382F431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P43A	-	CM7R151A-43B-T	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P43A	-	FC6204A432M	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P43A	-	ML6204A432M	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P43B	-	CM7R151B-43B-T	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P43B	-	FC6204B432M	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P43B	-	ML6204B432M	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P43C	-	CM7R151C-43B-T	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P43C	-	FC6204C432M	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P43C	-	ML6204C432M	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P43D	-	CM7R151D-43B-T	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P43D	-	FC6204D432M	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P43D	-	ML6204D432M	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P44	eb	XC6368E442MR	DC-DC-IC	PWM/PFM step-up, 4.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P44	eh	XC6382F441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P44A	-	CM7R151A-44B-T	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P44A	-	FC6204A442M	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P44A	-	ML6204A442M	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P44B	-	CM7R151B-44B-T	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P44B	-	FC6204B442M	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P44B	-	ML6204B442M	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P44C	-	CM7R151C-44B-T	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P44C	-	FC6204C442M	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P44C	-	ML6204C442M	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P44D	-	CM7R151D-44B-T	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P44D	-	FC6204D442M	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P44D	-	ML6204D442M	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P45	eb	XC6368E452MR	DC-DC-IC	PWM/PFM step-up, 4.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P45	eh	XC6382F451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P45A	-	CM7R151A-45B-T	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P45A	-	FC6204A452M	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P45A	-	ML6204A452M	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P45B	-	CM7R151B-45B-T	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P45B	-	FC6204B452M	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P45B	-	ML6204B452M	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P45C	-	CM7R151C-45B-T	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P45C	-	FC6204C452M	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P45C	-	ML6204C452M	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P45D	-	CM7R151D-45B-T	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P45D	-	FC6204D452M	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P45D	-	ML6204D452M	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P46	eb	XC6368E462MR	DC-DC-IC	PWM/PFM step-up, 4.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P46	eh	XC6382F461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P46A	-	CM7R151A-46B-T	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P46A	-	FC6204A462M	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P46A	-	ML6204A462M	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P46B	-	CM7R151B-46B-T	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P46B	-	FC6204B462M	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P46B	-	ML6204B462M	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P46C	-	CM7R151C-46B-T	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P46C	-	FC6204C462M	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P46C	-	ML6204C462M	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P46D	-	CM7R151D-46B-T	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P46D	-	FC6204D462M	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P46D	-	ML6204D462M	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P47	eb	XC6368E472MR	DC-DC-IC	PWM/PFM step-up, 4.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P47	eh	XC6382F471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P47A	-	CM7R151A-47B-T	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P47A	-	FC6204A472M	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P47A	-	ML6204A472M	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P47B	-	CM7R151B-47B-T	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P47B	-	FC6204B472M	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P47B	-	ML6204B472M	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P47C	-	CM7R151C-47B-T	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P47C	-	FC6204C472M	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P47C	-	ML6204C472M	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P47D	-	CM7R151D-47B-T	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P47D	-	FC6204D472M	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P47D	-	ML6204D472M	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P48	eb	XC6368E482MR	DC-DC-IC	PWM/PFM step-up, 4.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P48	eh	XC6382F481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P48A	-	CM7R151A-48B-T	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P48A	-	FC6204A482M	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P48A	-	ML6204A482M	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P48B	-	CM7R151B-48B-T	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P48B	-	FC6204B482M	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P48B	-	ML6204B482M	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P48C	-	CM7R151C-48B-T	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P48C	-	FC6204C482M	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P48C	-	ML6204C482M	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P48D	-	CM7R151D-48B-T	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P48D	-	FC6204D482M	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P48D	-	ML6204D482M	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P49	eb	XC6368E492MR	DC-DC-IC	PWM/PFM step-up, 4.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P49	eh	XC6382F491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P49A	-	CM7R151A-49B-T	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P49A	-	FC6204A492M	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P49A	-	ML6204A492M	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P49B	-	CM7R151B-49B-T	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P49B	-	FC6204B492M	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P49B	-	ML6204B492M	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P49C	-	CM7R151C-49B-T	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P49C	-	FC6204C492M	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P49C	-	ML6204C492M	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P49D	-	CM7R151D-49B-T	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P49D	-	FC6204D492M	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P49D	-	ML6204D492M	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P4A	-	S-1167B15-M5T1G	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4A	-	XC6108N44AMR	Vdet-IC	4.4V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P4A	-	XC6118C34AMR-G	Vdet-IC	3.4V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
P4A	eb	XC6368E403MR	DC-DC-IC	PWM/PFM step-up, 4.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P4AA	-	CM7R151A-40A-T	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4AA	-	FC6204A40AM	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P4AA	-	ML6204A40AM	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P4AB	-	CM7R151B-40A-T	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P4AB	-	FC6204B40AM	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P4AB	-	ML6204B40AM	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P4AC	-	CM7R151C-40A-T	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4AC	-	FC6204C40AM	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P4AC	-	ML6204C40AM	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P4AD	-	CM7R151D-40A-T	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P4AD	-	FC6204D40AM	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P4AD	-	ML6204D40AM	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P4B	-	S-1167B16-M5T1G	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4B	-	XC6108N44BMR	Vdet-IC	4.4V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P4B	-	XC6118C34BMR-G	Vdet-IC	3.4V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
P4B	eb	XC6368E413MR	DC-DC-IC	PWM/PFM step-up, 4.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P4BA	-	CM7R151A-41A-T	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4BA	-	FC6204A41AM	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P4BA	-	ML6204A41AM	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P4BB	-	CM7R151B-41A-T	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P4BB	-	FC6204B41AM	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P4BB	-	ML6204B41AM	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P4BC	-	CM7R151C-41A-T	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4BC	-	FC6204C41AM	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P4BC	-	ML6204C41AM	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P4BD	-	CM7R151D-41A-T	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P4BD	-	FC6204D41AM	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P4BD	-	ML6204D41AM	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P4C	-	S-1167B17-M5T1G	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4C	-	XC6108N44CMR	Vdet-IC	4.4V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P4C	-	XC6118C34CMR-G	Vdet-IC	3.4V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
P4C	eb	XC6368E423MR	DC-DC-IC	PWM/PFM step-up, 4.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P4CA	-	CM7R151A-42A-T	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4CA	-	FC6204A42AM	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P4CA	-	ML6204A42AM	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P4CB	-	CM7R151B-42A-T	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P4CB	-	FC6204B42AM	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P4CB	-	ML6204B42AM	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P4CC	-	CM7R151C-42A-T	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4CC	-	FC6204C42AM	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P4CC	-	ML6204C42AM	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P4CD	-	CM7R151D-42A-T	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P4CD	-	FC6204D42AM	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P4CD	-	ML6204D42AM	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P4D	-	S-1167B18-M5T1G	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4D	-	XC6108N44DMR	Vdet-IC	4.4V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P4D	-	XC6118C34DMR-G	Vdet-IC	3.4V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
P4D	eb	XC6368E433MR	DC-DC-IC	PWM/PFM step-up, 4.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P4DA	-	CM7R151A-43A-T	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4DA	-	FC6204A43AM	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P4DA	-	ML6204A43AM	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P4DB	-	CM7R151B-43A-T	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P4DB	-	FC6204B43AM	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P4DB	-	ML6204B43AM	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P4DC	-	CM7R151C-43A-T	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4DC	-	FC6204C43AM	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P4DC	-	ML6204C43AM	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P4DD	-	CM7R151D-43A-T	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P4DD	-	FC6204D43AM	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P4DD	-	ML6204D43AM	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P4E	-	S-1167B19-M5T1G	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4E	eb	XC6368E443MR	DC-DC-IC	PWM/PFM step-up, 4.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P4EA	-	CM7R151A-44A-T	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4EA	-	FC6204A44AM	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P4EA	-	ML6204A44AM	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P4EB	-	CM7R151B-44A-T	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P4EB	-	FC6204B44AM	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P4EB	-	ML6204B44AM	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P4EC	-	CM7R151C-44A-T	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4EC	-	FC6204C44AM	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P4EC	-	ML6204C44AM	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P4ED	-	CM7R151D-44A-T	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P4ED	-	FC6204D44AM	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P4ED	-	ML6204D44AM	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P4F	-	S-1167B20-M5T1G	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4F	eb	XC6368E453MR	DC-DC-IC	PWM/PFM step-up, 4.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P4FA	-	CM7R151A-45A-T	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4FA	-	FC6204A45AM	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P4FA	-	ML6204A45AM	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P4FB	-	CM7R151B-45A-T	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P4FB	-	FC6204B45AM	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P4FB	-	ML6204B45AM	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P4FC	-	CM7R151C-45A-T	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4FC	-	FC6204C45AM	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P4FC	-	ML6204C45AM	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P4FD	-	CM7R151D-45A-T	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P4FD	-	FC6204D45AM	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P4FD	-	ML6204D45AM	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P4G	-	S-1167B21-M5T1G	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4GA	-	CM7R151A-46A-T	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4GA	-	FC6204A46AM	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P4GA	-	ML6204A46AM	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P4GB	-	CM7R151B-46A-T	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P4GB	-	FC6204B46AM	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P4GB	-	ML6204B46AM	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P4GC	-	CM7R151C-46A-T	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4GC	-	FC6204C46AM	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P4GC	-	ML6204C46AM	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P4GD	-	CM7R151D-46A-T	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P4GD	-	FC6204D46AM	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P4GD	-	ML6204D46AM	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P4H	-	S-1167B22-M5T1G	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P4H	eb	XC6368E463MR	DC-DC-IC	PWM/PFM step-up, 4.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P4HA	-	CM7R151A-47A-T	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4HA	-	FC6204A47AM	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P4HA	-	ML6204A47AM	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P4HB	-	CM7R151B-47A-T	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P4HB	-	FC6204B47AM	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P4HB	-	ML6204B47AM	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P4HC	-	CM7R151C-47A-T	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4HC	-	FC6204C47AM	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P4HC	-	ML6204C47AM	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P4HD	-	CM7R151D-47A-T	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P4HD	-	FC6204D47AM	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P4HD	-	ML6204D47AM	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P4I	-	S-1167B23-M5T1G	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4IA	-	CM7R151A-48A-T	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4IA	-	FC6204A48AM	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P4IA	-	ML6204A48AM	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P4IB	-	CM7R151B-48A-T	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P4IB	-	FC6204B48AM	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P4IB	-	ML6204B48AM	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P4IC	-	CM7R151C-48A-T	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4IC	-	FC6204C48AM	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P4IC	-	ML6204C48AM	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P4ID	-	CM7R151D-48A-T	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P4ID	-	FC6204D48AM	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P4ID	-	ML6204D48AM	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P4J	-	S-1167B24-M5T1G	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4JA	-	CM7R151A-49A-T	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4JA	-	FC6204A49AM	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P4JA	-	ML6204A49AM	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P4JB	-	CM7R151B-49A-T	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P4JB	-	FC6204B49AM	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P4JB	-	ML6204B49AM	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P4JC	-	CM7R151C-49A-T	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P4JC	-	FC6204C49AM	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P4JC	-	ML6204C49AM	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P4JD	-	CM7R151D-49A-T	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P4JD	-	FC6204D49AM	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P4JD	-	ML6204D49AM	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P4K	-	S-1167B25-M5T1G	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4K	eb	XC6368E473MR	DC-DC-IC	PWM/PFM step-up, 4.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P4L	-	S-1167B26-M5T1G	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4L	eb	XC6368E483MR	DC-DC-IC	PWM/PFM step-up, 4.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P4M	-	S-1167B27-M5T1G	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4M	eb	XC6368E493MR	DC-DC-IC	PWM/PFM step-up, 4.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P4N	-	S-1167B28-M5T1G	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4O	-	S-1167B29-M5T1G	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4P	-	S-1167B30-M5T1G	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4Q	-	S-1167B31-M5T1G	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4R	-	S-1167B32-M5T1G	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4S	-	S-1167B33-M5T1G	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4T	-	S-1167B34-M5T1G	LVR-IC	LDO, 3.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4U	-	S-1167B35-M5T1G	LVR-IC	LDO, 3.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4V	-	S-1167B36-M5T1G	LVR-IC	LDO, 3.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4W	-	S-1167B37-M5T1G	LVR-IC	LDO, 3.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4X	-	S-1167B38-M5T1G	LVR-IC	LDO, 3.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4Y	-	S-1167B39-M5T1G	LVR-IC	LDO, 3.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P4Z	-	S-1167B40-M5T1G	LVR-IC	LDO, 4.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
p5	-	BD46E461G-M	Vdet-IC	4.6V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
P5	-	KRA568E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	TESV	30/TD9	TD9	6l	Kec
P5	-	KRA568U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	USV	28	TD9	6l	Kec
P5	-	TC1186-3.3VCT713	LVR-IC	LDO, 3.3V±3%, 150mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
P50	eb	XC6368E502MR	DC-DC-IC	PWM/PFM step-up, 5.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P50	eh	XC6382F501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P50A	-	CM7R151A-50B-T	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P50A	-	FC6204A502M	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P50A	-	ML6204A502M	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P50B	-	CM7R151B-50B-T	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P50B	-	FC6204B502M	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P50B	-	ML6204B502M	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P50C	-	CM7R151C-50B-T	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P50C	-	FC6204C502M	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P50C	-	ML6204C502M	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P50D	-	CM7R151D-50B-T	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P50D	-	FC6204D502M	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P50D	-	ML6204D502M	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P51	eb	XC6368E512MR	DC-DC-IC	PWM/PFM step-up, 5.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P51	eh	XC6382F511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P51A	-	CM7R151A-51B-T	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P51A	-	FC6204A512M	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P51A	-	ML6204A512M	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P51B	-	CM7R151B-51B-T	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P51B	-	FC6204B512M	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P51B	-	ML6204B512M	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P51C	-	CM7R151C-51B-T	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P51C	-	FC6204C512M	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P51C	-	ML6204C512M	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P51D	-	CM7R151D-51B-T	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P51D	-	FC6204D512M	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P51D	-	ML6204D512M	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P52	eb	XC6368E522MR	DC-DC-IC	PWM/PFM step-up, 5.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P52	eh	XC6382F521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P52A	-	CM7R151A-52B-T	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P52A	-	FC6204A522M	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P52A	-	ML6204A522M	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P52B	-	CM7R151B-52B-T	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P52B	-	FC6204B522M	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P52B	-	ML6204B522M	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P52C	-	CM7R151C-52B-T	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P52C	-	FC6204C522M	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P52C	-	ML6204C522M	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P52D	-	CM7R151D-52B-T	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P52D	-	FC6204D522M	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P52D	-	ML6204D522M	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P53	-	TC53N4502ECT	Vdet-IC	4.5V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
P53	eb	XC6368E532MR	DC-DC-IC	PWM/PFM step-up, 5.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P53	eh	XC6382F531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P53A	-	CM7R151A-53B-T	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P53A	-	FC6204A532M	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P53A	-	ML6204A532M	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P53B	-	CM7R151B-53B-T	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P53B	-	FC6204B532M	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P53B	-	ML6204B532M	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P53C	-	CM7R151C-53B-T	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P53C	-	FC6204C532M	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P53C	-	ML6204C532M	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P53D	-	CM7R151D-53B-T	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P53D	-	FC6204D532M	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P53D	-	ML6204D532M	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P54	eb	XC6368E542MR	DC-DC-IC	PWM/PFM step-up, 5.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P54	eh	XC6382F541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P54A	-	CM7R151A-54B-T	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P54A	-	FC6204A542M	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P54A	-	ML6204A542M	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P54B	-	CM7R151B-54B-T	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P54B	-	FC6204B542M	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P54B	-	ML6204B542M	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P54C	-	CM7R151C-54B-T	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P54C	-	FC6204C542M	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P54C	-	ML6204C542M	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P54D	-	CM7R151D-54B-T	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P54D	-	FC6204D542M	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P54D	-	ML6204D542M	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P55	eb	XC6368E552MR	DC-DC-IC	PWM/PFM step-up, 5.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P55	eh	XC6382F551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P55A	-	CM7R151A-55B-T	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P55A	-	FC6204A552M	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P55A	-	ML6204A552M	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P55B	-	CM7R151B-55B-T	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P55B	-	FC6204B552M	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P55B	-	ML6204B552M	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P55C	-	CM7R151C-55B-T	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P55C	-	FC6204C552M	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P55C	-	ML6204C552M	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P55D	-	CM7R151D-55B-T	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P55D	-	FC6204D552M	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P55D	-	ML6204D552M	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P56	eb	XC6368E562MR	DC-DC-IC	PWM/PFM step-up, 5.6V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P56	eh	XC6382F561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P56A	-	CM7R151A-56B-T	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P56A	-	FC6204A562M	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P56A	-	ML6204A562M	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P56B	-	CM7R151B-56B-T	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P56B	-	FC6204B562M	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P56B	-	ML6204B562M	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P56C	-	CM7R151C-56B-T	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P56C	-	FC6204C562M	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P56C	-	ML6204C562M	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P56D	-	CM7R151D-56B-T	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P56D	-	FC6204D562M	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P56D	-	ML6204D562M	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P57	eb	XC6368E572MR	DC-DC-IC	PWM/PFM step-up, 5.7V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P57	eh	XC6382F571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P57A	-	CM7R151A-57B-T	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P57A	-	FC6204A572M	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P57A	-	ML6204A572M	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P57B	-	CM7R151B-57B-T	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P57B	-	FC6204B572M	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P57B	-	ML6204B572M	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P57C	-	CM7R151C-57B-T	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P57C	-	FC6204C572M	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P57C	-	ML6204C572M	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P57D	-	CM7R151D-57B-T	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P57D	-	FC6204D572M	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P57D	-	ML6204D572M	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P58	eb	XC6368E582MR	DC-DC-IC	PWM/PFM step-up, 5.8V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P58	eh	XC6382F581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P58A	-	CM7R151A-58B-T	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P58A	-	FC6204A582M	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P58A	-	ML6204A582M	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P58B	-	CM7R151B-58B-T	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P58B	-	FC6204B582M	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P58B	-	ML6204B582M	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P58C	-	CM7R151C-58B-T	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P58C	-	FC6204C582M	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P58C	-	ML6204C582M	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P58D	-	CM7R151D-58B-T	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P58D	-	FC6204D582M	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P58D	-	ML6204D582M	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P59	eb	XC6368E592MR	DC-DC-IC	PWM/PFM step-up, 5.9V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P59	eh	XC6382F591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P59A	-	CM7R151A-59B-T	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P59A	-	FC6204A592M	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P59A	-	ML6204A592M	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P59B	-	CM7R151B-59B-T	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P59B	-	FC6204B592M	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P59B	-	ML6204B592M	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P59C	-	CM7R151C-59B-T	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P59C	-	FC6204C592M	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P59C	-	ML6204C592M	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P59D	-	CM7R151D-59B-T	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P59D	-	FC6204D592M	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P59D	-	ML6204D592M	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P5A	-	S-1167B41-M5T1G	LVR-IC	LDO, 4.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P5A	-	XC6108N45AMR	Vdet-IC	4.5V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P5A	-	XC6118C35AMR-G	Vdet-IC	3.5V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
P5A	eb	XC6368E503MR	DC-DC-IC	PWM/PFM step-up, 5.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P5AA	-	CM7R151A-50A-T	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5AA	-	FC6204A50AM	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P5AA	-	ML6204A50AM	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P5AB	-	CM7R151B-50A-T	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P5AB	-	FC6204B50AM	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P5AB	-	ML6204B50AM	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P5AC	-	CM7R151C-50A-T	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5AC	-	FC6204C50AM	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P5AC	-	ML6204C50AM	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P5AD	-	CM7R151D-50A-T	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P5AD	-	FC6204D50AM	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P5AD	-	ML6204D50AM	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P5B	-	S-1167B42-M5T1G	LVR-IC	LDO, 4.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P5B	-	XC6108N45BMR	Vdet-IC	4.5V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P5B	-	XC6118C35BMR-G	Vdet-IC	3.5V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
P5B	eb	XC6368E513MR	DC-DC-IC	PWM/PFM step-up, 5.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P5BA	-	CM7R151A-51A-T	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5BA	-	FC6204A51AM	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P5BA	-	ML6204A51AM	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P5BB	-	CM7R151B-51A-T	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P5BB	-	FC6204B51AM	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P5BB	-	ML6204B51AM	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P5BC	-	CM7R151C-51A-T	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5BC	-	FC6204C51AM	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P5BC	-	ML6204C51AM	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P5BD	-	CM7R151D-51A-T	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P5BD	-	FC6204D51AM	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P5BD	-	ML6204D51AM	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P5C	-	S-1167B43-M5T1G	LVR-IC	LDO, 4.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P5C	-	XC6108N45CMR	Vdet-IC	4.5V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P5C	-	XC6118C35CMR-G	Vdet-IC	3.5V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
P5C	eb	XC6368E523MR	DC-DC-IC	PWM/PFM step-up, 5.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P5CA	-	CM7R151A-52A-T	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5CA	-	FC6204A52AM	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P5CA	-	ML6204A52AM	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P5CB	-	CM7R151B-52A-T	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P5CB	-	FC6204B52AM	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P5CB	-	ML6204B52AM	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P5CC	-	CM7R151C-52A-T	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5CC	-	FC6204C52AM	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P5CC	-	ML6204C52AM	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P5CD	-	CM7R151D-52A-T	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P5CD	-	FC6204D52AM	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P5CD	-	ML6204D52AM	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P5D	-	S-1167B44-M5T1G	LVR-IC	LDO, 4.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P5D	-	XC6108N45DMR	Vdet-IC	4.5V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P5D	-	XC6118C35DMR-G	Vdet-IC	3.5V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
P5D	eb	XC6368E533MR	DC-DC-IC	PWM/PFM step-up, 5.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P5DA	-	CM7R151A-53A-T	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5DA	-	FC6204A53AM	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P5DA	-	ML6204A53AM	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P5DB	-	CM7R151B-53A-T	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P5DB	-	FC6204B53AM	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P5DB	-	ML6204B53AM	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P5DC	-	CM7R151C-53A-T	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5DC	-	FC6204C53AM	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P5DC	-	ML6204C53AM	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P5DD	-	CM7R151D-53A-T	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P5DD	-	FC6204D53AM	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P5DD	-	ML6204D53AM	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P5E	-	S-1167B45-M5T1G	LVR-IC	LDO, 4.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P5E	eb	XC6368E543MR	DC-DC-IC	PWM/PFM step-up, 5.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P5EA	-	CM7R151A-54A-T	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5EA	-	FC6204A54AM	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P5EA	-	ML6204A54AM	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P5EB	-	CM7R151B-54A-T	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P5EB	-	FC6204B54AM	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P5EB	-	ML6204B54AM	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P5EC	-	CM7R151C-54A-T	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5EC	-	FC6204C54AM	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P5EC	-	ML6204C54AM	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P5ED	-	CM7R151D-54A-T	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P5ED	-	FC6204D54AM	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P5ED	-	ML6204D54AM	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P5F	-	S-1167B46-M5T1G	LVR-IC	LDO, 4.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P5F	eb	XC6368E553MR	DC-DC-IC	PWM/PFM step-up, 5.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P5FA	-	CM7R151A-55A-T	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5FA	-	FC6204A55AM	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P5FA	-	ML6204A55AM	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P5FB	-	CM7R151B-55A-T	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P5FB	-	FC6204B55AM	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P5FB	-	ML6204B55AM	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P5FC	-	CM7R151C-55A-T	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5FC	-	FC6204C55AM	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P5FC	-	ML6204C55AM	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P5FD	-	CM7R151D-55A-T	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P5FD	-	FC6204D55AM	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P5FD	-	ML6204D55AM	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P5G	-	S-1167B47-M5T1G	LVR-IC	LDO, 4.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P5GA	-	CM7R151A-56A-T	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5GA	-	FC6204A56AM	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P5GA	-	ML6204A56AM	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P5GB	-	CM7R151B-56A-T	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P5GB	-	FC6204B56AM	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P5GB	-	ML6204B56AM	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P5GC	-	CM7R151C-56A-T	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5GC	-	FC6204C56AM	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P5GC	-	ML6204C56AM	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P5GD	-	CM7R151D-56A-T	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P5GD	-	FC6204D56AM	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P5GD	-	ML6204D56AM	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P5H	-	S-1167B48-M5T1G	LVR-IC	LDO, 4.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P5H	eb	XC6368E563MR	DC-DC-IC	PWM/PFM step-up, 5.6V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P5HA	-	CM7R151A-57A-T	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5HA	-	FC6204A57AM	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P5HA	-	ML6204A57AM	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P5HB	-	CM7R151B-57A-T	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P5HB	-	FC6204B57AM	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P5HB	-	ML6204B57AM	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P5HC	-	CM7R151C-57A-T	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5HC	-	FC6204C57AM	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P5HC	-	ML6204C57AM	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P5HD	-	CM7R151D-57A-T	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P5HD	-	FC6204D57AM	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P5HD	-	ML6204D57AM	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P5I	-	S-1167B49-M5T1G	LVR-IC	LDO, 4.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P5IA	-	CM7R151A-58A-T	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5IA	-	FC6204A58AM	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P5IA	-	ML6204A58AM	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P5IB	-	CM7R151B-58A-T	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P5IB	-	FC6204B58AM	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P5IB	-	ML6204B58AM	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P5IC	-	CM7R151C-58A-T	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5IC	-	FC6204C58AM	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P5IC	-	ML6204C58AM	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P5ID	-	CM7R151D-58A-T	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P5ID	-	FC6204D58AM	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P5ID	-	ML6204D58AM	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P5J	-	S-1167B50-M5T1G	LVR-IC	LDO, 5.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P5JA	-	CM7R151A-59A-T	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5JA	-	FC6204A59AM	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P5JA	-	ML6204A59AM	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P5JB	-	CM7R151B-59A-T	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P5JB	-	FC6204B59AM	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P5JB	-	ML6204B59AM	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P5JC	-	CM7R151C-59A-T	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P5JC	-	FC6204C59AM	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P5JC	-	ML6204C59AM	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P5JD	-	CM7R151D-59A-T	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P5JD	-	FC6204D59AM	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P5JD	-	ML6204D59AM	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P5K	-	S-1167B51-M5T1G	LVR-IC	LDO, 5.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P5K	eb	XC6368E573MR	DC-DC-IC	PWM/PFM step-up, 5.7V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P5L	-	S-1167B52-M5T1G	LVR-IC	LDO, 5.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P5L	eb	XC6368E583MR	DC-DC-IC	PWM/PFM step-up, 5.8V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P5M	-	S-1167B53-M5T1G	LVR-IC	LDO, 5.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P5M	eb	XC6368E593MR	DC-DC-IC	PWM/PFM step-up, 5.9V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P5N	-	S-1167B54-M5T1G	LVR-IC	LDO, 5.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
P5O	-	S-1167B55-M5T1G	LVR-IC	LDO, 5.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
p6	-	BD46E471G-M	Vdet-IC	4.7V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
P6	-	KRA569E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	TESV	30/TD9	TD9	6l	Kec
P6	-	KRA569U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	USV	28	TD9	6l	Kec
P6	-	KTA501F-GR	Si-pnp	Dual GP, 50V, 150mA, 100mW, B=200..400, 80MHz	TFSV	30/T12	T12	6l	Kec
P60	eb	XC6368E602MR	DC-DC-IC	PWM/PFM step-up, 6.0V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P60	eh	XC6382F601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P60A	-	CM7R151A-60B-T	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P60A	-	FC6204A602M	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
P60A	-	ML6204A602M	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
P60B	-	CM7R151B-60B-T	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Can
P60B	-	FC6204B602M	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
P60B	-	ML6204B602M	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
P60C	-	CM7R151C-60B-T	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PDR	SOT-23-5	28cx	VR4	6a	Can
P60C	-	FC6204C602M	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
P60C	-	ML6204C602M	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
P60D	-	CM7R151D-60B-T	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Can
P60D	-	FC6204D602M	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
P60D	-	ML6204D602M	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
P61	eb	XC6368E612MR	DC-DC-IC	PWM/PFM step-up, 6.1V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P61	eh	XC6382F611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P62	eb	XC6368E622MR	DC-DC-IC	PWM/PFM step-up, 6.2V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P62	eh	XC6382F621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P63	-	S-1701B3328-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P63	-	TC53N4602ECT	Vdet-IC	4.6V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
P63	eb	XC6368E632MR	DC-DC-IC	PWM/PFM step-up, 6.3V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P63	eh	XC6382F631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P64	-	S-1701B5040-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P64	eb	XC6368E642MR	DC-DC-IC	PWM/PFM step-up, 6.4V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P64	eh	XC6382F641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P65	-	S-1701B5041-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P65	eb	XC6368E652MR	DC-DC-IC	PWM/PFM step-up, 6.5V±2.5%, 200mA, 180kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P65	eh	XC6382F651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P66	-	S-1701B5042-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P66	eh	XC6382F661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P67	-	S-1701B5043-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P67	eh	XC6382F671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P68	eh	XC6382F681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P69	eh	XC6382F691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P6A	-	S-1701A1815-M5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6A	-	XC6108N46AMR	Vdet-IC	4.6V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P6A	-	XC6118C36AMR-G	Vdet-IC	3.6V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
P6A	eb	XC6368E603MR	DC-DC-IC	PWM/PFM step-up, 6.0V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P6B	-	S-1701A2520-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6B	-	XC6108N46BMR	Vdet-IC	4.6V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P6B	-	XC6118C36BMR-G	Vdet-IC	3.6V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
P6B	eb	XC6368E613MR	DC-DC-IC	PWM/PFM step-up, 6.1V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P6C	-	S-1701A2521-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6C	-	XC6108N46CMR	Vdet-IC	4.6V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P6C	-	XC6118C36CMR-G	Vdet-IC	3.6V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
P6C	eb	XC6368E623MR	DC-DC-IC	PWM/PFM step-up, 6.2V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P6D	-	S-1701A2522-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6D	-	XC6108N46DMR	Vdet-IC	4.6V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P6D	-	XC6118C36DMR-G	Vdet-IC	3.6V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
P6D	eb	XC6368E633MR	DC-DC-IC	PWM/PFM step-up, 6.3V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P6E	-	S-1701A3024-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6E	eb	XC6368E643MR	DC-DC-IC	PWM/PFM step-up, 6.4V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P6F	-	S-1701A3025-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6F	eb	XC6368E653MR	DC-DC-IC	PWM/PFM step-up, 6.5V±2.5%, 200mA, 300kHz, +CE	SOT-25	28sd	DC10	6g	Tor
P6G	-	S-1701A3026-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6H	-	S-1701A3326-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6I	-	S-1701A3327-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6J	-	S-1701A3328-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6K	-	S-1701A3430-M5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6L	-	S-1701A5040-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P6M	-	S-1701A5041-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6N	-	S-1701A5042-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6O	-	S-1701A5043-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6R	-	S-1701B1815-M5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6S	-	S-1701B2520-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6T	-	S-1701B2521-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6U	-	S-1701B2522-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6V	-	S-1701B3024-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6W	-	S-1701B3025-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6X	-	S-1701B3026-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6Y	-	S-1701B3326-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P6Z	-	S-1701B3327-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
p7	-	BD46E481G-M	Vdet-IC	4.8V±1%, -MR, -Reset PPO, Td=100ms	SSOP-5	28vdp	VD5	6c	Rhm
P7	-	KRA570E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/4.7k	TESV	30/TD9	TD9	6l	Kec
P7	-	KRA570U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/4.7k	USV	28	TD9	6l	Kec
P7	-	TC1186-5.0VCT713	LVR-IC	LDO, 5.0V±3%, 150mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
P70	eh	XC6382F701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
P73	-	S-1701W2522-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P73	-	TC53N4702ECT	Vdet-IC	4.7V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
P74	-	S-1701W3024-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P75	-	S-1701W3025-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P76	-	S-1701W3026-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P77	-	S-1701W3326-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P78	-	S-1701W3327-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
p79	-	74AUP1G79GV	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT753	28	Log20	6a	Nxp
P79	-	S-1701W3328-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7A	-	XC6108N47AMR	Vdet-IC	4.7V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P7A	-	XC6118C37AMR-G	Vdet-IC	3.7V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
P7B	-	XC6108N47BMR	Vdet-IC	4.7V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P7B	-	XC6118C37BMR-G	Vdet-IC	3.7V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
P7C	-	XC6108N47CMR	Vdet-IC	4.7V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P7C	-	XC6118C37CMR-G	Vdet-IC	3.7V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
P7D	-	XC6108N47DMR	Vdet-IC	4.7V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P7D	-	XC6118C37DMR-G	Vdet-IC	3.7V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
P7E	-	S-1701V1815-M5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7F	-	S-1701V2520-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7G	-	S-1701V2521-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7H	-	S-1701V2522-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7I	-	S-1701V3024-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7J	-	S-1701V3025-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7K	-	S-1701V3026-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7L	-	S-1701V3326-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7M	-	S-1701V3327-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7N	-	S-1701V3328-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7O	-	S-1701V5040-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7P	-	S-1701V5041-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7Q	-	S-1701V5042-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7R	-	S-1701V5043-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7S	-	S-1701V3430-M5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7X	-	S-1701W1815-M5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7Y	-	S-1701W2520-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P7Z	-	S-1701W2521-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
p8	-	BD46E232G-M	Vdet-IC	2.3V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
P8	-	KRA571E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	TESV	30/TD9	TD9	6l	Kec
P8	-	KRA571U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	USV	28	TD9	6l	Kec
P8	-	TC1186-2.85VCT713	LVR-IC	LDO, 2.85V±3%, 150mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
P83	-	TC53N4802ECT	Vdet-IC	4.8V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
P86	-	NC7SP86P5	CMOS-Log	2-input EXCLUSIVE-OR gate	SC-70-5	28	Log5	6a	F
P8A	-	S-1701W5040-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P8A	-	XC6108N48AMR	Vdet-IC	4.8V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P8A	-	XC6118C38AMR-G	Vdet-IC	3.8V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
P8B	-	S-1701W5041-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P8B	-	XC6108N48BMR	Vdet-IC	4.8V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P8B	-	XC6118C38BMR-G	Vdet-IC	3.8V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
P8C	-	S-1701W5042-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P8C	-	XC6108N48CMR	Vdet-IC	4.8V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P8C	-	XC6118C38CMR-G	Vdet-IC	3.8V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
P8D	-	S-1701W5043-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P8D	-	XC6108N48DMR	Vdet-IC	4.8V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P8D	-	XC6118C38DMR-G	Vdet-IC	3.8V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P8E	-	S-1701W3430-M5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P8J	-	S-1701X3228-M5T1	LVR/Vdet-IC	LDO, 3.2V±1%, 400mA, Vdet=2.8V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P8O	-	S-1701Y3228-M5T1	LVR/Vdet-IC	LDO, 3.2V±1%, 400mA, Vdet=2.8V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P8T	-	S-1701Z3228-M5T1	LVR/Vdet-IC	LDO, 3.2V±1%, 400mA, Vdet=2.8V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
P8Y	-	S-1701B3430-M5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
p9	-	74AUP1G09GW	CMOS-Log	2-input AND gate (ODO)	SOT-353-1	28	Log9	6a	Nxp
p9	-	BD46E242G-M	Vdet-IC	2.4V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
P9	-	KRA572E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	TESV	30/TD9	TD9	6l	Kec
P9	-	KRA572U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	USV	28	TD9	6l	Kec
P9	-	TC1186-3.6VCT713	LVR-IC	LDO, 3.6V±3%, 150mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
P93	-	TC53N4902ECT	Vdet-IC	4.9V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
P9A	-	S-1701C1815-M5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P9A	-	XC6108N49AMR	Vdet-IC	4.9V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P9A	-	XC6118C39AMR-G	Vdet-IC	3.9V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
P9B	-	S-1701C2520-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P9B	-	XC6108N49BMR	Vdet-IC	4.9V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
P9B	-	XC6118C39BMR-G	Vdet-IC	3.9V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
P9C	-	S-1701C2521-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P9C	-	XC6108N49CMR	Vdet-IC	4.9V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P9C	-	XC6118C39CMR-G	Vdet-IC	3.9V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
P9D	-	S-1701C2522-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P9D	-	XC6108N49DMR	Vdet-IC	4.9V±2%, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
P9D	-	XC6118C39DMR-G	Vdet-IC	3.9V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
P9E	-	S-1701C3024-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P9F	-	S-1701C3025-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P9G	-	S-1701C3026-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P9H	-	S-1701C3326-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P9I	-	S-1701C3327-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P9J	-	S-1701C3328-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P9K	-	S-1701C3430-M5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P9L	-	S-1701C5040-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P9M	-	S-1701C5041-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P9N	-	S-1701C5042-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
P9O	-	S-1701C5043-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
pA	-	74AUP1G00GW	CMOS-Log	2-input NAND gate	SOT-353-1	28	Log1	6a	Nxp
pA	-	EUP7917N	LVR-IC	LDO, Adjustable 1.2V..4.8V, 300mA, +CE	SC-70-5	28sg	VR5	6k	Eut
pA	-	EUP7917V	LVR-IC	LDO, Adjustable 1.2V..4.8V, 300mA, +CE	SOT-23-5	28sg	VR5	6k	Eut
Pa	-	BD52E53G-M	Vdet-IC	5.3V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PA	-	BD5240FVE	Vdet-IC	4.0V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PA	-	BD5240G	Vdet-IC	4.0V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PA	-	BH12PB1WHFV	LVR-IC	LDO, 1.2V±1.0%, 150mA, +CE	HVSOF5	30vrv	VR10	6e	Rhm
PA	-	KRA521T	Si-pnp-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=1k/1k	TSV	28	TD9	6l	Kec
PA	-	KRA551E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	TESV	30/TD9	TD9	6l	Kec
PA	-	KRA551U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	USV	28	TD9	6l	Kec
PA	-	PT7M7037CHTA	Vdet-IC	3.7V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PA	ea	PT7M7037CHTAE	Vdet-IC	3.7V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
PAA	-	RP109N321B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
PAB	-	RP109N331B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
PAC	-	RP109N341B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
PAD	-	RP109N351B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
PAE	-	RP109N361B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
PAF	-	RP109N121B5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
PAG	-	RP109N181B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
PAH	-	RP109N281B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
PAJ	-	RP109N341B5	LVR-IC	LDO, 3.45V±1%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
pB	-	74AUP1G02GW	CMOS-Log	2-input NOR gate	SOT-353-1	28	Log2	6a	Nxp
pB	-	EUP7917-25N	LVR-IC	LDO, 2.5V±3%, 300mA, +CE	SC-70-5	28vrx	VR7	6k	Eut
pB	-	EUP7917-25V	LVR-IC	LDO, 2.5V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Eut
Pb	-	BD52E54G-M	Vdet-IC	5.4V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PB	-	BD5241FVE	Vdet-IC	4.1V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PB	-	BD5241G	Vdet-IC	4.1V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PB	-	BH15PB1WHFV	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	HVSOF5	30vrv	VR10	6e	Rhm
PB	-	KRA522T	Si-pnp-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=2.2k/2.2k	TSV	28	TD9	6l	Kec
PB	-	KRA552E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	TESV	30/TD9	TD9	6l	Kec
PB	-	KRA552U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	USV	28	TD9	6l	Kec
PB	-	PT7M7037NLTA	Vdet-IC	3.7V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
PB	ea	PT7M7037NLTAE	Vdet-IC	3.7V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
PB5	eb	XC6368E151MR	DC-DC-IC	PWM/PFM step-up, 1.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PB6	eb	XC6368E161MR	DC-DC-IC	PWM/PFM step-up, 1.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PB7	eb	XC6368E171MR	DC-DC-IC	PWM/PFM step-up, 1.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PB8	eb	XC6368E181MR	DC-DC-IC	PWM/PFM step-up, 1.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PB9	eb	XC6368E191MR	DC-DC-IC	PWM/PFM step-up, 1.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PBA	-	RP109N321D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
PBB	-	RP109N331D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
PBC	-	RP109N341D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
PBD	-	RP109N351D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
PBE	-	RP109N361D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
PBF	-	RP109N121D5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
PBF	eb	XC6368E155MR	DC-DC-IC	PWM/PFM step-up, 1.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PBG	-	RP109N181D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
PBH	-	RP109N281D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
PBH	eb	XC6368E165MR	DC-DC-IC	PWM/PFM step-up, 1.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PBJ	-	RP109N341D5	LVR-IC	LDO, 3.45V±1%, 150mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
PBK	eb	XC6368E175MR	DC-DC-IC	PWM/PFM step-up, 1.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PBL	eb	XC6368E185MR	DC-DC-IC	PWM/PFM step-up, 1.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PBM	eb	XC6368E195MR	DC-DC-IC	PWM/PFM step-up, 1.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PBNI	-	TPS3123J12D	Vdet-IC	1.08V±1%, -Reset PPO, -MR, Strobe	SOT-23-5	28cp	VD17	6k	Ti
PBOI	-	TPS3123G15D	Vdet-IC	1.4V±1%, -Reset PPO, -MR, Strobe	SOT-23-5	28cp	VD17	6k	Ti
PBPI	-	TPS3123J18D	Vdet-IC	1.62V±1%, -Reset PPO, -MR, Strobe	SOT-23-5	28cp	VD17	6k	Ti
PBQI	-	TPS3124J12D	Vdet-IC	1.08V±1%, ±Reset PPO	SOT-23-5	28xq	-	6k	Ti
PBRI	-	TPS3124G15D	Vdet-IC	1.4V±1%, ±Reset PPO	SOT-23-5	28xq	-	6k	Ti
PBSI	-	TPS3124J18D	Vdet-IC	1.62V±1%, ±Reset PPO	SOT-23-5	28xq	-	6k	Ti
PBTI	-	TPS3125J12D	Vdet-IC	1.08V±1%, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6k	Ti
PBUI	-	TPS3125G15D	Vdet-IC	1.4V±1%, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6k	Ti
PBVI	-	TPS3125J18D	Vdet-IC	1.62V±1%, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6k	Ti
PBXI	-	TPS3125L30D	Vdet-IC	2.64V±1%, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6k	Ti
pC	-	74AUP1G04GW	CMOS-Log	Inverter	SOT-353-1	28	Log6	6a	Nxp
pC	-	EUP7917-15N	LVR-IC	LDO, 1.5V±3%, 300mA, +CE	SC-70-5	28vrx	VR7	6k	Eut
pC	-	EUP7917-15V	LVR-IC	LDO, 1.5V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Eut
Pc	-	BD52E55G-M	Vdet-IC	5.5V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PC	-	BD5242FVE	Vdet-IC	4.2V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PC	-	BD5242G	Vdet-IC	4.2V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PC	-	BH18RB1WHFV	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	HVSOF5	30vrv	VR10	6e	Rhm
PC	-	KRA523T	Si-pnp-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=4.7k/4.7k	TSV	28	TD9	6l	Kec
PC	-	KRA553E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	TESV	30/TD9	TD9	6l	Kec
PC	-	KRA553U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	USV	28	TD9	6l	Kec
PC	-	PT7M7038CLTA	Vdet-IC	3.8V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PC	ea	PT7M7038CLTAE	Vdet-IC	3.8V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
PC0	eb	XC6368E201MR	DC-DC-IC	PWM/PFM step-up, 2.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PC1	eb	XC6368E211MR	DC-DC-IC	PWM/PFM step-up, 2.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PC2	eb	XC6368E221MR	DC-DC-IC	PWM/PFM step-up, 2.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PC3	eb	XC6368E231MR	DC-DC-IC	PWM/PFM step-up, 2.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PC4	eb	XC6368E241MR	DC-DC-IC	PWM/PFM step-up, 2.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PC5	eb	XC6368E251MR	DC-DC-IC	PWM/PFM step-up, 2.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PC6	eb	XC6368E261MR	DC-DC-IC	PWM/PFM step-up, 2.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PC7	eb	XC6368E271MR	DC-DC-IC	PWM/PFM step-up, 2.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PC8	eb	XC6368E281MR	DC-DC-IC	PWM/PFM step-up, 2.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PC9	eb	XC6368E291MR	DC-DC-IC	PWM/PFM step-up, 2.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PCA	eb	XC6368E205MR	DC-DC-IC	PWM/PFM step-up, 2.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PCB	eb	XC6368E215MR	DC-DC-IC	PWM/PFM step-up, 2.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PCC	eb	XC6368E225MR	DC-DC-IC	PWM/PFM step-up, 2.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PCD	eb	XC6368E235MR	DC-DC-IC	PWM/PFM step-up, 2.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PCE	eb	XC6368E245MR	DC-DC-IC	PWM/PFM step-up, 2.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PCF	eb	XC6368E255MR	DC-DC-IC	PWM/PFM step-up, 2.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PCH	eb	XC6368E265MR	DC-DC-IC	PWM/PFM step-up, 2.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PCK	eb	XC6368E275MR	DC-DC-IC	PWM/PFM step-up, 2.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PCL	eb	XC6368E285MR	DC-DC-IC	PWM/PFM step-up, 2.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PCM	eb	XC6368E295MR	DC-DC-IC	PWM/PFM step-up, 2.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
pD	-	74AUP1GU04GW	CMOS-Log	Inverter	SOT-353-1	28	Log6	6a	Nxp
pD	-	EUP7917-18N	LVR-IC	LDO, 1.8V±3%, 300mA, +CE	SC-70-5	28vrx	VR7	6k	Eut
pD	-	EUP7917-18V	LVR-IC	LDO, 1.8V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Eut
Pd	-	BD52E56G-M	Vdet-IC	5.6V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PD	-	BD5243FVE	Vdet-IC	4.3V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PD	-	BD5243G	Vdet-IC	4.3V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PD	-	BH25RB1WHFV	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	HVSOF5	30vrv	VR10	6e	Rhm
PD	-	KRA524T	Si-pnp-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=10k/10k	TSV	28	TD9	6l	Kec
PD	-	KRA554E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	TESV	30/TD9	TD9	6l	Kec
PD	-	KRA554U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	USV	28	TD9	6l	Kec
PD	-	PT7M7038CHTA	Vdet-IC	3.8V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PD	ea	PT7M7038CHTAE	Vdet-IC	3.8V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PD0	eb	XC6368E301MR	DC-DC-IC	PWM/PFM step-up, 3.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PD1	eb	XC6368E311MR	DC-DC-IC	PWM/PFM step-up, 3.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PD2	eb	XC6368E321MR	DC-DC-IC	PWM/PFM step-up, 3.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PD3	eb	XC6368E331MR	DC-DC-IC	PWM/PFM step-up, 3.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PD4	eb	XC6368E341MR	DC-DC-IC	PWM/PFM step-up, 3.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PD5	eb	XC6368E351MR	DC-DC-IC	PWM/PFM step-up, 3.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PD6	eb	XC6368E361MR	DC-DC-IC	PWM/PFM step-up, 3.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PD7	eb	XC6368E371MR	DC-DC-IC	PWM/PFM step-up, 3.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PD8	eb	XC6368E381MR	DC-DC-IC	PWM/PFM step-up, 3.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PD9	eb	XC6368E391MR	DC-DC-IC	PWM/PFM step-up, 3.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PDA	eb	XC6368E305MR	DC-DC-IC	PWM/PFM step-up, 3.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PDB	eb	XC6368E315MR	DC-DC-IC	PWM/PFM step-up, 3.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PDC	eb	XC6368E325MR	DC-DC-IC	PWM/PFM step-up, 3.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PDD	eb	XC6368E335MR	DC-DC-IC	PWM/PFM step-up, 3.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PDE	eb	XC6368E345MR	DC-DC-IC	PWM/PFM step-up, 3.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PDF	eb	XC6368E355MR	DC-DC-IC	PWM/PFM step-up, 3.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PDH	eb	XC6368E365MR	DC-DC-IC	PWM/PFM step-up, 3.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PDK	eb	XC6368E375MR	DC-DC-IC	PWM/PFM step-up, 3.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PDL	eb	XC6368E385MR	DC-DC-IC	PWM/PFM step-up, 3.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PDM	eb	XC6368E395MR	DC-DC-IC	PWM/PFM step-up, 3.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
pE	-	74AUP1G08GW	CMOS-Log	2-input AND gate	SOT-353-1	28	Log3	6a	Nxp
pE	-	EUP7917-28N	LVR-IC	LDO, 2.8V±3%, 300mA, +CE	SC-70-5	28vrx	VR7	6k	Eut
pE	-	EUP7917-28V	LVR-IC	LDO, 2.8V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Eut
Pe	-	BD52E57G-M	Vdet-IC	5.7V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PE	-	BD5244FVE	Vdet-IC	4.4V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PE	-	BD5244G	Vdet-IC	4.4V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PE	-	BH28RB1WHFV	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	HVSOF5	30vrv	VR10	6e	Rhm
PE	-	KRA525T	Si-pnp-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=1k/10k	TSV	28	TD9	6l	Kec
PE	-	KRA555E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/4.7k	TESV	30/TD9	TD9	6l	Kec
PE	-	KRA555U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	USV	28	TD9	6l	Kec
PE	-	PT7M7038NLTA	Vdet-IC	3.8V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
PE	ea	PT7M7038NLTAE	Vdet-IC	3.8V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
PE0	eb	XC6368E401MR	DC-DC-IC	PWM/PFM step-up, 4.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PE1	eb	XC6368E411MR	DC-DC-IC	PWM/PFM step-up, 4.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PE2	eb	XC6368E421MR	DC-DC-IC	PWM/PFM step-up, 4.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PE3	eb	XC6368E431MR	DC-DC-IC	PWM/PFM step-up, 4.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PE4	eb	XC6368E441MR	DC-DC-IC	PWM/PFM step-up, 4.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PE5	eb	XC6368E451MR	DC-DC-IC	PWM/PFM step-up, 4.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PE6	eb	XC6368E461MR	DC-DC-IC	PWM/PFM step-up, 4.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PE7	eb	XC6368E471MR	DC-DC-IC	PWM/PFM step-up, 4.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PE8	eb	XC6368E481MR	DC-DC-IC	PWM/PFM step-up, 4.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PE9	eb	XC6368E491MR	DC-DC-IC	PWM/PFM step-up, 4.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PEA	eb	XC6368E405MR	DC-DC-IC	PWM/PFM step-up, 4.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PEB	eb	XC6368E415MR	DC-DC-IC	PWM/PFM step-up, 4.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PEC	eb	XC6368E425MR	DC-DC-IC	PWM/PFM step-up, 4.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PED	eb	XC6368E435MR	DC-DC-IC	PWM/PFM step-up, 4.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PEE	eb	XC6368E445MR	DC-DC-IC	PWM/PFM step-up, 4.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PEF	eb	XC6368E455MR	DC-DC-IC	PWM/PFM step-up, 4.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PEH	eb	XC6368E465MR	DC-DC-IC	PWM/PFM step-up, 4.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PEK	eb	XC6368E475MR	DC-DC-IC	PWM/PFM step-up, 4.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PEL	eb	XC6368E485MR	DC-DC-IC	PWM/PFM step-up, 4.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PEM	eb	XC6368E495MR	DC-DC-IC	PWM/PFM step-up, 4.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
pF	-	74AUP1G14GW	CMOS-Log	Inverting Schmitt-trigger	SOT-353-1	28	Log7	6a	Nxp
pF	-	EUP7917-285N	LVR-IC	LDO, 2.85V±3%, 300mA, +CE	SC-70-5	28vrx	VR7	6k	Eut
pF	-	EUP7917-285V	LVR-IC	LDO, 2.85V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Eut
Pf	-	BD52E58G-M	Vdet-IC	5.8V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PF	-	BD5245FVE	Vdet-IC	4.5V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PF	-	BD5245G	Vdet-IC	4.5V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PF	-	BH29RB1WHFV	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	HVSOF5	30vrv	VR10	6e	Rhm
PF	-	KRA526T	Si-pnp-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=2.2k/10k	TSV	28	TD9	6l	Kec
PF	-	KRA556E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	TESV	30/TD9	TD9	6l	Kec
PF	-	KRA556U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	USV	28	TD9	6l	Kec
PF	-	PT7M7039CLTA	Vdet-IC	3.9V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PF	ea	PT7M7039CLTAE	Vdet-IC	3.9V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
PF0	eb	XC6368E501MR	DC-DC-IC	PWM/PFM step-up, 5.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PF1	eb	XC6368E511MR	DC-DC-IC	PWM/PFM step-up, 5.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PF2	eb	XC6368E521MR	DC-DC-IC	PWM/PFM step-up, 5.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PF3	eb	XC6368E531MR	DC-DC-IC	PWM/PFM step-up, 5.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PF4	eb	XC6368E541MR	DC-DC-IC	PWM/PFM step-up, 5.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PF5	eb	XC6368E551MR	DC-DC-IC	PWM/PFM step-up, 5.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PF6	eb	XC6368E561MR	DC-DC-IC	PWM/PFM step-up, 5.6V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PF7	eb	XC6368E571MR	DC-DC-IC	PWM/PFM step-up, 5.7V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PF8	eb	XC6368E581MR	DC-DC-IC	PWM/PFM step-up, 5.8V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PF9	eb	XC6368E591MR	DC-DC-IC	PWM/PFM step-up, 5.9V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PFA	eb	XC6368E505MR	DC-DC-IC	PWM/PFM step-up, 5.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PFB	eb	XC6368E515MR	DC-DC-IC	PWM/PFM step-up, 5.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PFC	eb	XC6368E525MR	DC-DC-IC	PWM/PFM step-up, 5.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PFD	eb	XC6368E535MR	DC-DC-IC	PWM/PFM step-up, 5.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PFE	eb	XC6368E545MR	DC-DC-IC	PWM/PFM step-up, 5.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PFF	eb	XC6368E555MR	DC-DC-IC	PWM/PFM step-up, 5.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PFH	eb	XC6368E565MR	DC-DC-IC	PWM/PFM step-up, 5.6V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PFK	eb	XC6368E575MR	DC-DC-IC	PWM/PFM step-up, 5.7V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PFL	eb	XC6368E585MR	DC-DC-IC	PWM/PFM step-up, 5.8V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PFM	eb	XC6368E595MR	DC-DC-IC	PWM/PFM step-up, 5.9V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PFOI	-	TPS3126E12D	Vdet-IC	1.14V±1%, -MR, ±Reset ODO	SOT-23-5	28xf	-	6k	Ti
PFPI	-	TPS3126E15D	Vdet-IC	1.43V±1%, -MR, ±Reset ODO	SOT-23-5	28xf	-	6k	Ti
PFQI	-	TPS3126E18D	Vdet-IC	1.71V±1%, -MR, ±Reset ODO	SOT-23-5	28xf	-	6k	Ti
PFRI	-	TPS3128E12D	Vdet-IC	1.14V±1%, -Reset ODO, -MR, Strobe	SOT-23-5	28cp	VD16	6k	Ti
PFSI	-	TPS3128E15D	Vdet-IC	1.43V±1%, -Reset ODO, -MR, Strobe	SOT-23-5	28cp	VD16	6k	Ti
PFTI	-	TPS3128E18D	Vdet-IC	1.71V±1%, -Reset ODO, -MR, Strobe	SOT-23-5	28cp	VD16	6k	Ti
PFUI	-	TPS76201DB	LVR-IC	LDO, Adjustable 0.7..5.5V, 150mA, +CE	SOT-23-5	28sg	VR16	6b	Ti
pG	-	74AUP1G32GW	CMOS-Log	2-input OR gate	SOT-353-1	28	Log4	6a	Nxp
pG	-	EUP7917-30N	LVR-IC	LDO, 3.0V±3%, 300mA, +CE	SC-70-5	28vrx	VR7	6k	Eut
pG	-	EUP7917-30V	LVR-IC	LDO, 3.0V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Eut
Pg	-	BD52E59G-M	Vdet-IC	5.9V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PG	-	BD5246FVE	Vdet-IC	4.6V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PG	-	BD5246G	Vdet-IC	4.6V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PG	-	BH30RB1WHFV	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	HVSOF5	30vrv	VR10	6e	Rhm
PG	-	PT7M7039CHTA	Vdet-IC	3.9V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PG	ea	PT7M7039CHTAE	Vdet-IC	3.9V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
pH	-	74AUP1G86GW	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353-1	28	Log5	6a	Nxp
pH	-	EUP7917-33N	LVR-IC	LDO, 3.3V±3%, 300mA, +CE	SC-70-5	28vrx	VR7	6k	Eut
pH	-	EUP7917-33V	LVR-IC	LDO, 3.3V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Eut
Ph	-	BD52E60G-M	Vdet-IC	6.0V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PH	-	BD5247FVE	Vdet-IC	4.7V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PH	-	BD5247G	Vdet-IC	4.7V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PH	-	BH31RB1WHFV	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	HVSOF5	30vrv	VR10	6e	Rhm
PH	-	KRA557E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	TESV	30/TD9	TD9	6l	Kec
PH	-	KRA557U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	USV	28	TD9	6l	Kec
PH	-	PT7M7039NLTA	Vdet-IC	3.9V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
PH	ea	PT7M7039NLTAE	Vdet-IC	3.9V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
PH0	eb	XC6368E601MR	DC-DC-IC	PWM/PFM step-up, 6.0V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PH1	eb	XC6368E611MR	DC-DC-IC	PWM/PFM step-up, 6.1V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PH2	eb	XC6368E621MR	DC-DC-IC	PWM/PFM step-up, 6.2V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PH3	eb	XC6368E631MR	DC-DC-IC	PWM/PFM step-up, 6.3V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PH4	eb	XC6368E641MR	DC-DC-IC	PWM/PFM step-up, 6.4V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PH5	eb	XC6368E651MR	DC-DC-IC	PWM/PFM step-up, 6.5V±2.5%, 200mA, 100kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PHA	eb	XC6368E605MR	DC-DC-IC	PWM/PFM step-up, 6.0V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PHB	eb	XC6368E615MR	DC-DC-IC	PWM/PFM step-up, 6.1V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PHC	eb	XC6368E625MR	DC-DC-IC	PWM/PFM step-up, 6.2V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PHD	eb	XC6368E635MR	DC-DC-IC	PWM/PFM step-up, 6.3V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PHE	eb	XC6368E645MR	DC-DC-IC	PWM/PFM step-up, 6.4V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PHF	eb	XC6368E655MR	DC-DC-IC	PWM/PFM step-up, 6.5V±2.5%, 200mA, 500kHz, +CE	SOT-25	28sd	DC10	6g	Tor
PI	-	KRA558E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	TESV	30/TD9	TD9	6l	Kec
PI	-	KRA558U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	USV	28	TD9	6l	Kec
PI	-	PT7M7040CLTA	Vdet-IC	4.0V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PI	ea	PT7M7040CLTAE	Vdet-IC	4.0V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
pJ	-	74AUP1G17GW	CMOS-Log	Schmitt-trigger	SOT-353-1	28	Log11	6a	Nxp
PJ	-	BD5248FVE	Vdet-IC	4.8V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PJ	-	BD5248G	Vdet-IC	4.8V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PJ	-	BH33RB1WHFV	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	HVSOF5	30vrv	VR10	6e	Rhm
PJ	-	KRA559E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	TESV	30/TD9	TD9	6l	Kec
PJ	-	KRA559U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	USV	28	TD9	6l	Kec
PJ	-	PT7M7040CHTA	Vdet-IC	4.0V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PJ	ea	PT7M7040CHTAE	Vdet-IC	4.0V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
pK	-	EUP7917-48N	LVR-IC	LDO, 4.8V±3%, 300mA, +CE	SC-70-5	28vrx	VR7	6k	Eut
pK	-	EUP7917-48V	LVR-IC	LDO, 4.8V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Eut
Pk	-	BD53E23G-M	Vdet-IC	2.3V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
PK	-	BD5249FVE	Vdet-IC	4.9V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PK	-	BD5249G	Vdet-IC	4.9V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PK	-	KRA560E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4.7k	TESV	30/TD9	TD9	6l	Kec
PK	-	KRA560U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4.7k	USV	28	TD9	6l	Kec
PK	-	PT7M7040NLTA	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
PK	ea	PT7M7040NLTAE	Vdet-IC	4.0V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
PK2	-	S-1000C41-M5T1	Vdet-IC	4.1V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PK3	-	S-1000C42-M5T1	Vdet-IC	4.2V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PK4	-	S-1000C43-M5T1	Vdet-IC	4.3V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PK5	-	S-1000C44-M5T1	Vdet-IC	4.4V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PK6	-	S-1000C45-M5T1	Vdet-IC	4.5V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PK7	-	S-1000C46-M5T1	Vdet-IC	4.6V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKA	-	S-1000C15-M5T1	Vdet-IC	1.5V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKB	-	S-1000C16-M5T1	Vdet-IC	1.6V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKC	-	S-1000C17-M5T1	Vdet-IC	1.7V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKD	-	S-1000C18-M5T1	Vdet-IC	1.8V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKE	-	S-1000C19-M5T1	Vdet-IC	1.9V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKF	-	S-1000C20-M5T1	Vdet-IC	2.0V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKG	-	S-1000C21-M5T1	Vdet-IC	2.1V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKH	-	S-1000C22-M5T1	Vdet-IC	2.2V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKI	-	S-1000C23-M5T1	Vdet-IC	2.3V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKJ	-	S-1000C24-M5T1	Vdet-IC	2.4V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKK	-	S-1000C25-M5T1	Vdet-IC	2.5V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKL	-	S-1000C26-M5T1	Vdet-IC	2.6V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKM	-	S-1000C27-M5T1	Vdet-IC	2.7V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKN	-	S-1000C28-M5T1	Vdet-IC	2.8V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKO	-	S-1000C29-M5T1	Vdet-IC	2.9V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKP	-	S-1000C30-M5T1	Vdet-IC	3.0V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKQ	-	S-1000C31-M5T1	Vdet-IC	3.1V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKR	-	S-1000C32-M5T1	Vdet-IC	3.2V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKS	-	S-1000C33-M5T1	Vdet-IC	3.3V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKT	-	S-1000C34-M5T1	Vdet-IC	3.4V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKU	-	S-1000C35-M5T1	Vdet-IC	3.5V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKV	-	S-1000C36-M5T1	Vdet-IC	3.6V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKW	-	S-1000C37-M5T1	Vdet-IC	3.7V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKX	-	S-1000C38-M5T1	Vdet-IC	3.8V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKY	-	S-1000C39-M5T1	Vdet-IC	3.9V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PKZ	-	S-1000C40-M5T1	Vdet-IC	4.0V±1.0%, -Reset PPO	SOT-23-5	28vdm	VD7	6a	Sii
PL	-	BD5250FVE	Vdet-IC	5.0V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PL	-	BD5250G	Vdet-IC	5.0V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PL	-	PT7M7041CLTA	Vdet-IC	4.1V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PL	-	R1122N501A	LVR-IC	LDO, Low noise, 5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
PL	ea	PT7M7041CLTAE	Vdet-IC	4.1V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
PL2	-	S-1000N41-M5T1	Vdet-IC	4.1V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PL3	-	S-1000N42-M5T1	Vdet-IC	4.2V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PL4	-	S-1000N43-M5T1	Vdet-IC	4.3V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PL5	-	S-1000N44-M5T1	Vdet-IC	4.4V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PL6	-	S-1000N45-M5T1	Vdet-IC	4.5V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PL7	-	S-1000N46-M5T1	Vdet-IC	4.6V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLA	-	S-1000N15-M5T1	Vdet-IC	1.5V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLB	-	S-1000N16-M5T1	Vdet-IC	1.6V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLC	-	S-1000N17-M5T1	Vdet-IC	1.7V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLD	-	S-1000N18-M5T1	Vdet-IC	1.8V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLE	-	S-1000N19-M5T1	Vdet-IC	1.9V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLF	-	S-1000N20-M5T1	Vdet-IC	2.0V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLG	-	S-1000N21-M5T1	Vdet-IC	2.1V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLH	-	S-1000N22-M5T1	Vdet-IC	2.2V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLI	-	S-1000N23-M5T1	Vdet-IC	2.3V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLJ	-	S-1000N24-M5T1	Vdet-IC	2.4V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLK	-	S-1000N25-M5T1	Vdet-IC	2.5V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLL	-	S-1000N26-M5T1	Vdet-IC	2.6V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLM	-	S-1000N27-M5T1	Vdet-IC	2.7V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLN	-	S-1000N28-M5T1	Vdet-IC	2.8V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLO	-	S-1000N29-M5T1	Vdet-IC	2.9V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLP	-	S-1000N30-M5T1	Vdet-IC	3.0V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLQ	-	S-1000N31-M5T1	Vdet-IC	3.1V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLR	-	S-1000N32-M5T1	Vdet-IC	3.2V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLS	-	S-1000N33-M5T1	Vdet-IC	3.3V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLT	-	S-1000N34-M5T1	Vdet-IC	3.4V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLU	-	S-1000N35-M5T1	Vdet-IC	3.5V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLV	-	S-1000N36-M5T1	Vdet-IC	3.6V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLW	-	S-1000N37-M5T1	Vdet-IC	3.7V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PLX	-	S-1000N38-M5T1	Vdet-IC	3.8V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLY	-	S-1000N39-M5T1	Vdet-IC	3.9V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
PLZ	-	S-1000N40-M5T1	Vdet-IC	4.0V±1.0%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Sii
pM	-	74AUP1G125GW	CMOS-Log	Bus buffer gate with 3-state output	SOT-353-1	28	Log14	6a	Nxp
Pm	-	BD53E24G-M	Vdet-IC	2.4V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
PM	-	BD5251FVE	Vdet-IC	5.1V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PM	-	BD5251G	Vdet-IC	5.1V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PM	-	KRA561E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	TESV	30/TD9	TD9	6l	Kec
PM	-	KRA561U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	USV	28	TD9	6l	Kec
PM	-	PT7M7041CHTA	Vdet-IC	4.1V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PM	ea	PT7M7041CHTAE	Vdet-IC	4.1V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
pN	-	74AUP1G126GW	CMOS-Log	Bus buffer gate with 3-state output	SOT-353-1	28	Log13	6a	Nxp
Pn	-	BD53E25G-M	Vdet-IC	2.5V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
PN	-	BD5252FVE	Vdet-IC	5.2V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PN	-	BD5252G	Vdet-IC	5.2V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PN	-	KRA562E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=100k	TESV	30/TD9	TD9	6l	Kec
PN	-	KRA562U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=100k	USV	28	TD9	6l	Kec
PN	-	PT7M7041NLTA	Vdet-IC	4.1V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
PN	ea	PT7M7041NLTAE	Vdet-IC	4.1V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
PO	-	KRA563E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=22k	TESV	30/TD9	TD9	6l	Kec
PO	-	KRA563U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=22k	USV	28	TD9	6l	Kec
PO	-	PT7M7042CLTA	Vdet-IC	4.2V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PO	ea	PT7M7042CLTAE	Vdet-IC	4.2V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
POA	-	S-1200B15-M5T1G	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POB	-	S-1200B16-M5T1G	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POC	-	S-1200B17-M5T1G	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POD	-	S-1200B18-M5T1G	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POE	-	S-1200B19-M5T1G	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POF	-	S-1200B20-M5T1G	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POG	-	S-1200B21-M5T1G	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POH	-	S-1200B22-M5T1G	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POI	-	S-1200B23-M5T1G	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POJ	-	S-1200B24-M5T1G	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POK	-	S-1200B25-M5T1G	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POL	-	S-1200B26-M5T1G	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POM	-	S-1200B27-M5T1G	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
PON	-	S-1200B28-M5T1G	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POO	-	S-1200B29-M5T1G	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POP	-	S-1200B30-M5T1G	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POQ	-	S-1200B31-M5T1G	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POR	-	S-1200B32-M5T1G	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POS	-	S-1200B33-M5T1G	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POT	-	S-1200B34-M5T1G	LVR-IC	LDO, 3.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POU	-	S-1200B35-M5T1G	LVR-IC	LDO, 3.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POV	-	S-1200B36-M5T1G	LVR-IC	LDO, 3.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POW	-	S-1200B37-M5T1G	LVR-IC	LDO, 3.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POX	-	S-1200B38-M5T1G	LVR-IC	LDO, 3.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POY	-	S-1200B39-M5T1G	LVR-IC	LDO, 3.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
POZ	-	S-1200B40-M5T1G	LVR-IC	LDO, 4.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
pP	-	74AUP1G79GW	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT-353-1	28	Log20	6a	Nxp
Pp	-	BD53E26G-M	Vdet-IC	2.6V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
PP	-	BD5253FVE	Vdet-IC	5.3V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PP	-	BD5253G	Vdet-IC	5.3V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PP	-	KRA564E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=47k	TESV	30/TD9	TD9	6l	Kec
PP	-	KRA564U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=47k	USV	28	TD9	6l	Kec
PP	-	PT7M7042CHTA	Vdet-IC	4.2V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PP	ea	PT7M7042CHTAE	Vdet-IC	4.2V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
PPA	-	S-1200B41-M5T1G	LVR-IC	LDO, 4.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
PPB	-	S-1200B42-M5T1G	LVR-IC	LDO, 4.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
PPC	-	S-1200B43-M5T1G	LVR-IC	LDO, 4.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
PPD	-	S-1200B44-M5T1G	LVR-IC	LDO, 4.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
PPE	-	S-1200B45-M5T1G	LVR-IC	LDO, 4.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
PPF	-	S-1200B46-M5T1G	LVR-IC	LDO, 4.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
PPG	-	S-1200B47-M5T1G	LVR-IC	LDO, 4.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
PPH	-	S-1200B48-M5T1G	LVR-IC	LDO, 4.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
PPI	-	S-1200B49-M5T1G	LVR-IC	LDO, 4.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
PPJ	-	S-1200B50-M5T1G	LVR-IC	LDO, 5.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
PPK	-	S-1200B51-M5T1G	LVR-IC	LDO, 5.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
PPL	-	S-1200B52-M5T1G	LVR-IC	LDO, 5.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
PPM	-	S-1200B53-M5T1G	LVR-IC	LDO, 5.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PPN	-	S-1200B54-M5T1G	LVR-IC	LDO, 5.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
PPO	-	S-1200B55-M5T1G	LVR-IC	LDO, 5.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
pQ	-	74AUP1T34GW	CMOS-Log	Dual supply translating buffer	SOT-353-1	28	Log78	6a	Nxp
PQ	-	BD5254FVE	Vdet-IC	5.4V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PQ	-	BD5254G	Vdet-IC	5.4V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PQ	-	PT7M7042NLTA	Vdet-IC	4.2V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
PQ	ea	PT7M7042NLTAE	Vdet-IC	4.2V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
pR	-	74AUP1G06GW	CMOS-Log	Inverter (ODO)	SOT-353-1	28	Log19	6a	Nxp
pR	-	EUP7917-35N	LVR-IC	LDO, 3.5V±3%, 300mA, +CE	SC-70-5	28vrx	VR7	6k	Eut
pR	-	EUP7917-35V	LVR-IC	LDO, 3.5V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Eut
Pr	-	BD53E27G-M	Vdet-IC	2.7V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
PR	-	BD5255FVE	Vdet-IC	5.5V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PR	-	BD5255G	Vdet-IC	5.5V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PR	-	PT7M7043CLTA	Vdet-IC	4.3V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PR	ea	PT7M7043CLTAE	Vdet-IC	4.3V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
pS	-	74AUP1G07GW	CMOS-Log	Noninverting buffer/driver (ODO)	SOT-353-1	28	Log8	6a	Nxp
PS	-	74LVCE1G00SE	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6t	Di
PS	-	74LVCE1G00W5	CMOS-Log	2-input NAND gate	SOT-25	28	Log1	6t	Di
PS	-	BD5256FVE	Vdet-IC	5.6V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PS	-	BD5256G	Vdet-IC	5.6V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PS	-	PT7M7043CHTA	Vdet-IC	4.3V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PS	ea	PT7M7043CHTAE	Vdet-IC	4.3V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
pT	-	EUP7917-12N	LVR-IC	LDO, 1.2V±3%, 300mA, +CE	SC-70-5	28vrx	VR7	6k	Eut
pT	-	EUP7917-12V	LVR-IC	LDO, 1.2V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Eut
PT	-	74LVCE1G02SE	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6t	Di
PT	-	74LVCE1G02W5	CMOS-Log	2-input NOR gate	SOT-25	28	Log2	6t	Di
PT	-	BD5257FVE	Vdet-IC	5.7V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PT	-	BD5257G	Vdet-IC	5.7V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PT	-	PT7M7043NLTA	Vdet-IC	4.3V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
PT	ea	PT7M7043NLTAE	Vdet-IC	4.3V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
pU	-	EUP7917-185N	LVR-IC	LDO, 1.85V±3%, 300mA, +CE	SC-70-5	28vrx	VR7	6k	Eut
pU	-	EUP7917-185V	LVR-IC	LDO, 1.85V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Eut
PU	-	74LVCE1G04W5	CMOS-Log	Inverter	SOT-25	28	Log6	6t	Di
PU	-	BD5258FVE	Vdet-IC	5.8V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PU	-	BD5258G	Vdet-IC	5.8V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PU	-	PT7M7044CLTA	Vdet-IC	4.4V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PU	ea	PT7M7044CLTAE	Vdet-IC	4.4V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
PV	-	74LVCE1G04SE	CMOS-Log	Inverter	SOT-353	28	Log6	6t	Di
PV	-	BD5259FVE	Vdet-IC	5.9V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PV	-	BD5259G	Vdet-IC	5.9V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PV	-	PT7M7044CHTA	Vdet-IC	4.4V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PV	ea	PT7M7044CHTAE	Vdet-IC	4.4V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
PV3	-	S-1701E3326-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PV4	-	S-1701E3327-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PV5	-	S-1701E3328-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PV6	-	S-1701E5040-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PV7	-	S-1701E5041-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PV8	-	S-1701E5042-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PV9	-	S-1701E5043-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVA	-	S-1701D1815-M5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVB	-	S-1701D2520-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVC	-	S-1701D2521-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVD	-	S-1701D2522-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVE	-	S-1701D3024-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVF	-	S-1701D3025-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVG	-	S-1701D3026-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVH	-	S-1701D3326-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVI	-	S-1701D3327-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVJ	-	S-1701D3328-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVK	-	S-1701D5040-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVL	-	S-1701D5041-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVM	-	S-1701D5042-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVN	-	S-1701D5043-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVO	-	S-1701D3430-M5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVT	-	S-1701E1815-M5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVU	-	S-1701E2520-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVV	-	S-1701E2521-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVW	-	S-1701E2522-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVX	-	S-1701E3024-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PVY	-	S-1701E3025-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PVZ	-	S-1701E3026-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
pW	-	EUP7917-29N	LVR-IC	LDO, 2.9V±3%, 300mA, +CE	SC-70-5	28vrx	VR7	6k	Eut
pW	-	EUP7917-29V	LVR-IC	LDO, 2.9V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Eut
PW	-	BD5260FVE	Vdet-IC	6.0V±1%, -Reset ODO	VSOF-5	30ua	VD1	6e	Rhm
PW	-	BD5260G	Vdet-IC	6.0V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
PW	-	PT7M7044NLTA	Vdet-IC	4.4V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
PW	ea	PT7M7044NLTAE	Vdet-IC	4.4V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
PW3	-	S-1701N2515-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PW4	-	S-1701N2715-M5T1	LVR/Vdet-IC	LDO, 2.7V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PW5	-	S-1701N3015-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PW6	-	S-1701N3315-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PW7	-	S-1701N5015-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PWA	-	S-1701E3430-M5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PWF	-	S-1701F1815-M5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PWG	-	S-1701F2520-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PWH	-	S-1701F2521-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PWI	-	S-1701F2522-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PWJ	-	S-1701F3024-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PWK	-	S-1701F3025-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PWL	-	S-1701F3026-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PWM	-	S-1701F3326-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PWN	-	S-1701F3327-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PWO	-	S-1701F3328-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PWP	-	S-1701F5040-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PWQ	-	S-1701F5041-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PWR	-	S-1701F5042-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PWS	-	S-1701F5043-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PWT	-	S-1701F3430-M5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO, +CE	SOT-23-5	28hg	VR15	6a	Sii
PWY	-	S-1701N1515-M5T1	LVR/Vdet-IC	LDO, 1.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PWZ	-	S-1701N1815-M5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
pX	-	EUP7917-13N	LVR-IC	LDO, 1.3V±3%, 300mA, +CE	SC-70-5	28vrx	VR7	6k	Eut
pX	-	EUP7917-13V	LVR-IC	LDO, 1.3V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Eut
PX	-	PT7M7045CLTA	Vdet-IC	4.5V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PX	ea	PT7M7045CLTAE	Vdet-IC	4.5V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
PX3	-	S-1701Q1815-M5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PX4	-	S-1701Q2515-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PX5	-	S-1701Q2715-M5T1	LVR/Vdet-IC	LDO, 2.74V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PX6	-	S-1701Q3015-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PX7	-	S-1701Q3315-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PX8	-	S-1701Q5015-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PXI	-	S-1701P1515-M5T1	LVR/Vdet-IC	LDO, 1.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PXJ	-	S-1701P1815-M5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PXK	-	S-1701P2515-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PXL	-	S-1701P2715-M5T1	LVR/Vdet-IC	LDO, 2.74V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PXM	-	S-1701P3015-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PXN	-	S-1701P3315-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PXO	-	S-1701P5015-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PXZ	-	S-1701Q1515-M5T1	LVR/Vdet-IC	LDO, 1.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
Py	-	BD53E28G-M	Vdet-IC	2.8V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
PY	-	PT7M7045CHTA	Vdet-IC	4.5V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
PY	-	TC1186-1.8VCT713	LVR-IC	LDO, 1.8V±3%, 150mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
PY	ea	PT7M7045CHTAE	Vdet-IC	4.5V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
PYE	-	S-1701R1515-M5T1	LVR/Vdet-IC	LDO, 1.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PYF	-	S-1701R1815-M5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PYG	-	S-1701R2515-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PYH	-	S-1701R2715-M5T1	LVR/Vdet-IC	LDO, 2.74V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PYI	-	S-1701R3015-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PYJ	-	S-1701R3315-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PYK	-	S-1701R5015-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PYQ	-	S-1701S1515-M5T1	LVR/Vdet-IC	LDO, 1.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PYR	-	S-1701S1815-M5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PYS	-	S-1701S2515-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PYT	-	S-1701S2715-M5T1	LVR/Vdet-IC	LDO, 2.74V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PYU	-	S-1701S3015-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PYV	-	S-1701S3315-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PYW	-	S-1701S5015-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PZ	-	PT7M7045NLTA	Vdet-IC	4.5V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
PZ	-	TC1186-2.8VCT713	LVR-IC	LDO, 2.8V±3%, 150mA, +CE, -Error	SOT-23-5	28w	VR8	6g	Mcc
PZ	ea	PT7M7045NLTAE	Vdet-IC	4.5V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
PZ3	-	S-1701U3328-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PZ4	-	S-1701U5040-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
PZ5	-	S-1701U5041-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
PZ6	-	S-1701U5042-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
PZ7	-	S-1701U5043-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
PZ8	-	S-1701U3430-M5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
PZA	-	S-1701T1515-M5T1	LVR/Vdet-IC	LDO, 1.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PZB	-	S-1701T1815-M5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PZC	-	S-1701T2515-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PZD	-	S-1701T2715-M5T1	LVR/Vdet-IC	LDO, 2.7V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PZE	-	S-1701T3015-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PZF	-	S-1701T3315-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PZG	-	S-1701T5015-M5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hh	VR14	6a	Sii
PZR	-	S-1701U1815-M5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
PZS	-	S-1701U2520-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
PZT	-	S-1701U2521-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
PZU	-	S-1701U2522-M5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
PZV	-	S-1701U3024-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
PZW	-	S-1701U3025-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
PZX	-	S-1701U3026-M5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
PZY	-	S-1701U3326-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
PZZ	-	S-1701U3327-M5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO	SOT-23-5	28hj	VR13	6a	Sii
Q00	-	R1161N281B5	LVR-IC	LDO, 2.85V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q001	-	RP106Q072B	LVR-IC	LDO, 0.7V±0.8%, 400mA, +CE	SC-88A	28xm	VR4	6ma	Ric
Q002	-	RP106Q082B	LVR-IC	LDO, 0.8V±0.8%, 400mA, +CE	SC-88A	28xm	VR4	6ma	Ric
Q003	-	RP106Q092B	LVR-IC	LDO, 0.9V±0.8%, 400mA, +CE	SC-88A	28xm	VR4	6ma	Ric
Q004	-	RP106Q102B	LVR-IC	LDO, 1.0V±0.8%, 400mA, +CE	SC-88A	28xm	VR4	6ma	Ric
Q005	-	RP106Q112B	LVR-IC	LDO, 1.1V±0.8%, 400mA, +CE	SC-88A	28xm	VR4	6ma	Ric
Q006	-	RP106Q122B	LVR-IC	LDO, 1.2V±0.8%, 400mA, +CE	SC-88A	28xm	VR4	6ma	Ric
Q007	-	RP106Q132B	LVR-IC	LDO, 1.3V±0.8%, 400mA, +CE	SC-88A	28xm	VR4	6ma	Ric
Q008	-	RP106Q142B	LVR-IC	LDO, 1.4V±0.8%, 400mA, +CE	SC-88A	28xm	VR4	6ma	Ric
Q009	-	RP106Q152B	LVR-IC	LDO, 1.5V±0.8%, 400mA, +CE	SC-88A	28xm	VR4	6ma	Ric
Q010	-	RP106Q162B	LVR-IC	LDO, 1.6V±0.8%, 400mA, +CE	SC-88A	28xm	VR4	6ma	Ric
Q011	-	RP106Q172B	LVR-IC	LDO, 1.7V±0.8%, 400mA, +CE	SC-88A	28xm	VR4	6ma	Ric
Q012	-	RP106Q182B	LVR-IC	LDO, 1.8V±0.8%, 400mA, +CE	SC-88A	28xm	VR4	6ma	Ric
Q013	-	RP106Q102B5	LVR-IC	LDO, 1.05V±0.8%, 400mA, +CE	SC-88A	28xm	VR4	6ma	Ric
Q014	-	RP106Q122B5	LVR-IC	LDO, 1.25V±0.8%, 400mA, +CE	SC-88A	28xm	VR4	6ma	Ric
Q015	-	RP106Q182B5	LVR-IC	LDO, 1.85V±0.8%, 400mA, +CE	SC-88A	28xm	VR4	6ma	Ric
Q016	-	RP106Q112B5	LVR-IC	LDO, 1.15V±0.8%, 400mA, +CE	SC-88A	28xm	VR4	6ma	Ric
Q08	-	R1161N081B	LVR-IC	LDO, 0.8V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q09	-	NCP585HSN09T1	LVR-IC	LDO, 0.9V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons
Q09	-	R1161N091B	LVR-IC	LDO, 0.9V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q0A	-	RP200N321B	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q0B	-	RP200N331B	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q0C	-	RP200N341B	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q0D	-	RP200N351B	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q0E	-	RP200N361B	LVR-IC	LDO, 3.6V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q0F	-	RP200N371B	LVR-IC	LDO, 3.7V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q0G	-	RP200N381B	LVR-IC	LDO, 3.8V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q0H	-	RP200N391B	LVR-IC	LDO, 3.9V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q0J	-	RP200N401B	LVR-IC	LDO, 4.0V±1.0%, 300mA, +CE, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q10	-	NCP585HSN10T1	LVR-IC	LDO, 1.0V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons
Q10	-	R1161N101B	LVR-IC	LDO, 1.0V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q11	-	R1161N111B	LVR-IC	LDO, 1.1V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q12	-	NCP585HSN12T1	LVR-IC	LDO, 1.2V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons
Q12	-	R1161N121B	LVR-IC	LDO, 1.2V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q13	-	R1161N131B	LVR-IC	LDO, 1.3V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q14	-	R1161N141B	LVR-IC	LDO, 1.4V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q15	-	R1161N151B	LVR-IC	LDO, 1.5V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q16	-	R1161N161B	LVR-IC	LDO, 1.6V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q17	-	R1161N171B	LVR-IC	LDO, 1.7V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q18	-	NCP585HSN18T1	LVR-IC	LDO, 1.8V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons
Q18	-	R1161N181B	LVR-IC	LDO, 1.8V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q19	-	R1161N191B	LVR-IC	LDO, 1.9V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q1A	-	RP200N321D	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q1B	-	RP200N331D	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q1C	-	RP200N341D	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q1D	-	RP200N351D	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q1E	-	RP200N361D	LVR-IC	LDO, 3.6V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q1F	-	RP200N371D	LVR-IC	LDO, 3.7V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q1G	-	RP200N381D	LVR-IC	LDO, 3.8V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Q1H	-	RP200N391D	LVR-IC	LDO, 3.9V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q1J	-	RP200N401D	LVR-IC	LDO, 4.0V±1.0%, 300mA, +CE, CL, AE(mode)	SOT-23-5	28x9	VR10	6g	Ric
Q20	-	R1161N201B	LVR-IC	LDO, 2.0V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q21	-	R1161N211B	LVR-IC	LDO, 2.1V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q22	-	R1161N221B	LVR-IC	LDO, 2.2V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q23	-	R1161N231B	LVR-IC	LDO, 2.3V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q24	-	R1161N241B	LVR-IC	LDO, 2.4V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q25	-	R1161N251B	LVR-IC	LDO, 2.5V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q26	-	R1161N261B	LVR-IC	LDO, 2.6V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q27	-	R1161N271B	LVR-IC	LDO, 2.7V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q28	-	R1161N281B	LVR-IC	LDO, 2.8V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q29	-	R1161N291B	LVR-IC	LDO, 2.9V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q30	-	NCP585HSN30T1	LVR-IC	LDO, 3 0V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons
Q30	-	R1161N301B	LVR-IC	LDO, 3.0V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q31	-	R1161N311B	LVR-IC	LDO, 3.1V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q32	-	R1161N321B	LVR-IC	LDO, 3.2V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q33	-	R1161N331B	LVR-IC	LDO, 3.3V±2%, 350mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
Q4	-	KTC601F-Y	Si-npn	Dual GP, 50V, 150mA, 100mW, B=120..240, 80MHz	TFSV	30/T11	T11	6l	Kec
Q5	-	R1121N151A	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
Q6	-	KTC601F-GR	Si-npn	Dual GP, 50V, 150mA, 100mW, B=200..400, 80MHz	TFSV	30/T11	T11	6l	Kec
Q6	-	R1121N161A	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
Q7	-	R1121N171A	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
Q8	-	R1121N181A	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
Q9	-	R1121N191A	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
Qa	-	BD53E29G-M	Vdet-IC	2.9V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QA	-	PT7M7046CLTA	Vdet-IC	4.6V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
QA	ea	PT7M7046CLTAE	Vdet-IC	4.6V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
QAA	-	RP114N081B	LVR-IC	LDO, 0.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAB	-	RP114N091B	LVR-IC	LDO, 0.9V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAC	-	RP114N101B	LVR-IC	LDO, 1.0V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAD	-	RP114N111B	LVR-IC	LDO, 1.1V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAE	-	RP114N121B	LVR-IC	LDO, 1.2V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAF	-	RP114N131B	LVR-IC	LDO, 1.3V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAG	-	RP114N141B	LVR-IC	LDO, 1.4V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAH	-	RP114N151B	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAJ	-	RP114N161B	LVR-IC	LDO, 1.6V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAK	-	RP114N171B	LVR-IC	LDO, 1.7V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAL	-	RP114N181B	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAM	-	RP114N191B	LVR-IC	LDO, 1.9V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAN	-	RP114N201B	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAP	-	RP114N211B	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAQ	-	RP114N221B	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAR	-	RP114N231B	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAS	-	RP114N241B	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAT	-	RP114N251B	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAU	-	RP114N261B	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAV	-	RP114N271B	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAW	-	RP114N281B	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAX	-	RP114N291B	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAY	-	RP114N301B	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
QAZ	-	RP114N311B	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
Qb	-	BD53E30G-M	Vdet-IC	3.0V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QB	-	PT7M7046CHTA	Vdet-IC	4.6V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
QB	ea	PT7M7046CHTAE	Vdet-IC	4.6V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
QBA	-	RP114N081D	LVR-IC	LDO, 0.8V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBB	-	RP114N091D	LVR-IC	LDO, 0.9V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBC	-	RP114N101D	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBD	-	RP114N111D	LVR-IC	LDO, 1.1V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBE	-	RP114N121D	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBF	-	RP114N131D	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBG	-	RP114N141D	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBH	-	RP114N151D	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBJ	-	RP114N161D	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBK	-	RP114N171D	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBL	-	RP114N181D	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBM	-	RP114N191D	LVR-IC	LDO, 1.9V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBN	-	RP114N201D	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBP	-	RP114N211D	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBQ	-	RP114N221D	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBR	-	RP114N231D	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
QBS	-	RP114N241D	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBT	-	RP114N251D	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBU	-	RP114N261D	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBV	-	RP114N271D	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBW	-	RP114N281D	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBX	-	RP114N291D	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBY	-	RP114N301D	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
QBZ	-	RP114N311D	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Qc	-	BD53E31G-M	Vdet-IC	3.1V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QC	-	PT7M7046NLTA	Vdet-IC	4.6V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
QC	ea	PT7M7046NLTAE	Vdet-IC	4.6V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
Qd	-	BD53E32G-M	Vdet-IC	3.2V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QD	-	BD5323FVE	Vdet-IC	2.3V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QD	-	BD5323G	Vdet-IC	2.3V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QD	-	PT7M7047CLTA	Vdet-IC	4.7V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
QD	ea	PT7M7047CLTAE	Vdet-IC	4.7V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
Qe	-	BD53E33G-M	Vdet-IC	3.3V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QE	-	BD5324FVE	Vdet-IC	2.4V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QE	-	BD5324G	Vdet-IC	2.4V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QE	-	PT7M7047CHTA	Vdet-IC	4.7V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
QE	ea	PT7M7047CHTAE	Vdet-IC	4.7V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
Qf	-	BD53E34G-M	Vdet-IC	3.4V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QF	-	BD5325FVE	Vdet-IC	2.5V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QF	-	BD5325G	Vdet-IC	2.5V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QF	-	PT7M7047NLTA	Vdet-IC	4.7V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
QF	ea	PT7M7047NLTAE	Vdet-IC	4.7V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
Qg	-	BD53E35G-M	Vdet-IC	3.5V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QG	-	BD5326FVE	Vdet-IC	2.6V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QG	-	BD5326G	Vdet-IC	2.6V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QG	-	PT7M7048CLTA	Vdet-IC	4.8V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
QG	ea	PT7M7048CLTAE	Vdet-IC	4.8V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
Qh	-	BD53E36G-M	Vdet-IC	3.6V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QH	-	BD5327FVE	Vdet-IC	2.7V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QH	-	BD5327G	Vdet-IC	2.7V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QH	-	PT7M7048CHTA	Vdet-IC	4.8V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
QH	ea	PT7M7048CHTAE	Vdet-IC	4.8V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
QI	-	PT7M7048NLTA	Vdet-IC	4.8V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
QI	ea	PT7M7048NLTAE	Vdet-IC	4.8V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
QJ	-	BD5328FVE	Vdet-IC	2.8V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QJ	-	BD5328G	Vdet-IC	2.8V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QJ	-	PT7M7049CLTA	Vdet-IC	4.9V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
QJ	ea	PT7M7049CLTAE	Vdet-IC	4.9V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
Qk	-	BD53E37G-M	Vdet-IC	3.7V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QK	-	BD5329FVE	Vdet-IC	2.9V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QK	-	BD5329G	Vdet-IC	2.9V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QK	-	PT7M7049CHTA	Vdet-IC	4.9V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
QK	ea	PT7M7049CHTAE	Vdet-IC	4.9V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
QL	-	BD5330FVE	Vdet-IC	3.0V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QL	-	BD5330G	Vdet-IC	3.0V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QL	-	PT7M7049NLTA	Vdet-IC	4.9V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
QL	ea	PT7M7049NLTAE	Vdet-IC	4.9V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
QLA	-	S-1132B15-M5T1G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLB	-	S-1132B16-M5T1G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLC	-	S-1132B17-M5T1G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLD	-	S-1132B18-M5T1G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLE	-	S-1132B19-M5T1G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLF	-	S-1132B20-M5T1G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLG	-	S-1132B21-M5T1G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLH	-	S-1132B22-M5T1G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLI	-	S-1132B23-M5T1G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLJ	-	S-1132B24-M5T1G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLK	-	S-1132B25-M5T1G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLL	-	S-1132B26-M5T1G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLM	-	S-1132B27-M5T1G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLN	-	S-1132B28-M5T1G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLO	-	S-1132B29-M5T1G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLP	-	S-1132B30-M5T1G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLQ	-	S-1132B31-M5T1G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLR	-	S-1132B32-M5T1G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLS	-	S-1132B33-M5T1G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
QLT	-	S-1132B34-M5T1G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLU	-	S-1132B35-M5T1G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLV	-	S-1132B36-M5T1G	LVR-IC	LDO, 3.6V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLW	-	S-1132B37-M5T1G	LVR-IC	LDO, 3.7V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLX	-	S-1132B38-M5T1G	LVR-IC	LDO, 3.8V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLY	-	S-1132B39-M5T1G	LVR-IC	LDO, 3.9V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QLZ	-	S-1132B40-M5T1G	LVR-IC	LDO, 4.0V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
Qm	-	BD53E38G-M	Vdet-IC	3.8V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QM	-	BD5331FVE	Vdet-IC	3.1V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QM	-	BD5331G	Vdet-IC	3.1V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QM	-	PT7M7050CLTA	Vdet-IC	5.0V±1.5%, -Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
QM	ea	PT7M7050CLTAE	Vdet-IC	5.0V±1.5%, -Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
QMA	-	S-1132B41-M5T1G	LVR-IC	LDO, 4.1V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QMB	-	S-1132B42-M5T1G	LVR-IC	LDO, 4.2V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QMC	-	S-1132B43-M5T1G	LVR-IC	LDO, 4.3V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QMD	-	S-1132B44-M5T1G	LVR-IC	LDO, 4.4V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QME	-	S-1132B45-M5T1G	LVR-IC	LDO, 4.5V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QMF	-	S-1132B46-M5T1G	LVR-IC	LDO, 4.6V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QMG	-	S-1132B47-M5T1G	LVR-IC	LDO, 4.7V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QMH	-	S-1132B48-M5T1G	LVR-IC	LDO, 4.8V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QMI	-	S-1132B49-M5T1G	LVR-IC	LDO, 4.9V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QMJ	-	S-1132B50-M5T1G	LVR-IC	LDO, 5.0V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QMK	-	S-1132B51-M5T1G	LVR-IC	LDO, 5.1V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QML	-	S-1132B52-M5T1G	LVR-IC	LDO, 5.2V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QMM	-	S-1132B53-M5T1G	LVR-IC	LDO, 5.3V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QMN	-	S-1132B54-M5T1G	LVR-IC	LDO, 5.4V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
QMO	-	S-1132B55-M5T1G	LVR-IC	LDO, 5.5V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
Qn	-	BD53E39G-M	Vdet-IC	3.9V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QN	-	BD5332FVE	Vdet-IC	3.2V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QN	-	BD5332G	Vdet-IC	3.2V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QN	-	PT7M7050CHTA	Vdet-IC	5.0V±1.5%, +Reset PPO	SOT-23-5	28vdr	VD7	6k	Pti
QN	ea	PT7M7050CHTAE	Vdet-IC	5.0V±1.5%, +Reset PPO, Lead free	SOT-23-5	28vdr	VD7	6k	Pti
QO	-	PT7M7050NLTA	Vdet-IC	5.0V±1.5%, -Reset ODO	SOT-23-5	28vdr	VD6	6k	Pti
QO	ea	PT7M7050NLTAE	Vdet-IC	5.0V±1.5%, -Reset ODO, Lead free	SOT-23-5	28vdr	VD6	6k	Pti
Qp	-	BD53E40G-M	Vdet-IC	4.0V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QP	-	BD5333FVE	Vdet-IC	3.3V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QP	-	BD5333G	Vdet-IC	3.3V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QQ	-	BD5334FVE	Vdet-IC	3.4V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QQ	-	BD5334G	Vdet-IC	3.4V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
Qr	-	BD53E41G-M	Vdet-IC	4.1V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QR	-	BD5335FVE	Vdet-IC	3.5V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QR	-	BD5335G	Vdet-IC	3.5V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QR	-	R1122N151A	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
QS	-	BD5336FVE	Vdet-IC	3.6V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QS	-	BD5336G	Vdet-IC	3.6V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QS	-	R1122N161A	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
QT	-	BD5337FVE	Vdet-IC	3.7V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QT	-	BD5337G	Vdet-IC	3.7V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QT	-	R1122N171A	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
QU	-	BD5338FVE	Vdet-IC	3.8V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QU	-	BD5338G	Vdet-IC	3.8V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QU	-	R1122N181A	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
QV	-	BD5339FVE	Vdet-IC	3.9V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
QV	-	BD5339G	Vdet-IC	3.9V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
QV	-	R1122N191A	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6g	Ric
Qy	-	BD53E42G-M	Vdet-IC	4.2V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
R0	-	R1121N201B	LVR-IC	LDO, Low noise, 2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
R00	-	R1161N281D5	LVR-IC	LDO, 2.85V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R001	-	RP106Q072D	LVR-IC	LDO, 0.7V±0.8%, 400mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
R002	-	RP106Q082D	LVR-IC	LDO, 0.8V±0.8%, 400mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
R003	-	RP106Q092D	LVR-IC	LDO, 0.9V±0.8%, 400mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
R004	-	RP106Q102D	LVR-IC	LDO, 1.0V±0.8%, 400mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
R005	-	RP106Q112D	LVR-IC	LDO, 1.1V±0.8%, 400mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
R006	-	RP106Q122D	LVR-IC	LDO, 1.2V±0.8%, 400mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
R007	-	RP106Q132D	LVR-IC	LDO, 1.3V±0.8%, 400mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
R008	-	RP106Q142D	LVR-IC	LDO, 1.4V±0.8%, 400mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
R009	-	RP106Q152D	LVR-IC	LDO, 1.5V±0.8%, 400mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
R01	-	NCP585DSN125T	LVR-IC	LDO, 1.25V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons
R010	-	RP106Q162D	LVR-IC	LDO, 1.6V±0.8%, 400mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
R011	-	RP106Q172D	LVR-IC	LDO, 1.7V±0.8%, 400mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R012	-	RP106Q182D	LVR-IC	LDO, 1.8V±0.8%, 400mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
R013	-	RP106Q102D5	LVR-IC	LDO, 1.05V±0.8%, 400mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
R014	-	RP106Q122D5	LVR-IC	LDO, 1.25V±0.8%, 400mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
R015	-	RP106Q182D5	LVR-IC	LDO, 1.85V±0.8%, 400mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
R016	-	RP106Q112D5	LVR-IC	LDO, 1.15V±0.8%, 400mA, +CE, CL	SC-88A	28xm	VR4	6ma	Ric
R03	-	TC53N5002ECT	Vdet-IC	5.0V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
R08	-	R1161N081D	LVR-IC	LDO, 0.8V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R09	-	NCP585DSN09T1	LVR-IC	LDO, 0.9V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons
R09	-	R1161N091D	LVR-IC	LDO, 0.9V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R090X	-	VRR0902LSX	LVR-IC	LDO, 0.9V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R095X	-	VRR0952LSX	LVR-IC	LDO, 0.95V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R0A	-	RP105N061B	LVR-IC	LDO, 0.6V±15mV, 400mA, +CE	SOT-23-5	28ze	VR11	6g	Ric
R0A	-	XC6108N50AMR	Vdet-IC	5.0V±2%, Hysteresis, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
R0A	-	XC6118C40AMR-G	Vdet-IC	4.0V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
R0B	-	RP105N071B	LVR-IC	LDO, 0.7V±15mV, 400mA, +CE	SOT-23-5	28ze	VR11	6g	Ric
R0B	-	XC6108N50BMR	Vdet-IC	5.0V±2%, -Reset ODO	SOT-25	28rm	VD14	6g	Tor
R0B	-	XC6118C40BMR-G	Vdet-IC	4.0V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
R0C	-	RP105N081B	LVR-IC	LDO, 0.8V±15mV, 400mA, +CE	SOT-23-5	28ze	VR11	6g	Ric
R0C	-	XC6108N50CMR	Vdet-IC	5.0V±2%, Hysteresis, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
R0C	-	XC6118C40CMR-G	Vdet-IC	4.0V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
R0D	-	RP105N091B	LVR-IC	LDO, 0.9V±15mV, 400mA, +CE	SOT-23-5	28ze	VR11	6g	Ric
R0D	-	XC6108N50DMR	Vdet-IC	5.0±2%V, -Reset ODO	SOT-25	28rk	VD14	6g	Tor
R0D	-	XC6118C40DMR-G	Vdet-IC	4.0V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
R0E	-	RP105N101B	LVR-IC	LDO, 1.0V±15mV, 400mA, +CE	SOT-23-5	28ze	VR11	6g	Ric
R0F	-	RP105N121B	LVR-IC	LDO, 1.2V±15mV, 400mA, +CE	SOT-23-5	28ze	VR11	6g	Ric
R0G	-	RP105N131B	LVR-IC	LDO, 1.3V±15mV, 400mA, +CE	SOT-23-5	28ze	VR11	6g	Ric
R0H	-	RP105N141B	LVR-IC	LDO, 1.4V±15mV, 400mA, +CE	SOT-23-5	28ze	VR11	6g	Ric
R0J	-	RP105N151B	LVR-IC	LDO, 1.5V±15mV, 400mA, +CE	SOT-23-5	28ze	VR11	6g	Ric
R0K	-	RP105N111B	LVR-IC	LDO, 1.1V±15mV, 400mA, +CE	SOT-23-5	28ze	VR11	6g	Ric
r1	-	BD46E252G-M	Vdet-IC	2.5V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
R1	-	R1121N211B	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
R1	-	TC7SZ00AFE	CMOS-Log	2-input NAND gate	SON-5	30	Log1	6a	Tos
R10	-	R1161N101D	LVR-IC	LDO, 1.0V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R100X	-	VRR1002LSX	LVR-IC	LDO, 1.0V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R105X	-	VRR1022LSX	LVR-IC	LDO, 1.05V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R11	-	R1161N111D	LVR-IC	LDO, 1.1V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R110X	-	VRR1102LSX	LVR-IC	LDO, 1.1V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R115X	-	VRR1122LSX	LVR-IC	LDO, 1.15V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R12	-	NCP585DSN12T1	LVR-IC	LDO, 1.2V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons
R12	-	R1161N121D	LVR-IC	LDO, 1.2V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R120X	-	VRR1202LSX	LVR-IC	LDO, 1.2V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R125X	-	VRR1252LSX	LVR-IC	LDO, 1.25V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R13	-	R1161N131D	LVR-IC	LDO, 1.3V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R13	-	TC53N5102ECT	Vdet-IC	5.1V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
R130X	-	VRR1302LSX	LVR-IC	LDO, 1.3V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R135X	-	VRR1352LSX	LVR-IC	LDO, 1.35V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R14	-	R1161N141D	LVR-IC	LDO, 1.4V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R140X	-	VRR1402LSX	LVR-IC	LDO, 1.4V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R145X	-	VRR1452LSX	LVR-IC	LDO, 1.45V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R15	-	NCP585DSN15T1	LVR-IC	LDO, 1.5V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons
R15	-	R1161N151D	LVR-IC	LDO, 1.5V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R15	-	TK11115CS	LVR-IC	LDO, 1.5V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R15	eb	XC6368F152MR	DC-DC-IC	PWM/PFM step-up, 1.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R150X	-	VRR1502LSX	LVR-IC	LDO, 1.5V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R155X	-	VRR1552LSX	LVR-IC	LDO, 1.55V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R15A	-	CM7R153A-15B-T	LVR-IC	LDO, 1.5V±3%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R15B	-	CM7R153B-15B-T	LVR-IC	LDO, 1.5V±3%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R15C	-	CM7R153C-15B-T	LVR-IC	LDO, 1.5V±3%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R15D	-	CM7R153D-15B-T	LVR-IC	LDO, 1.5V±3%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R16	-	R1161N161D	LVR-IC	LDO, 1.6V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R16	-	TK11116CS	LVR-IC	LDO, 1.6V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R16	eb	XC6368F162MR	DC-DC-IC	PWM/PFM step-up, 1.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R160X	-	VRR1602LSX	LVR-IC	LDO, 1.6V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R165X	-	VRR1652LSX	LVR-IC	LDO, 1.65V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R16A	-	CM7R153A-16B-T	LVR-IC	LDO, 1.6V±3%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R16B	-	CM7R153B-16B-T	LVR-IC	LDO, 1.6V±3%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R16C	-	CM7R153C-16B-T	LVR-IC	LDO, 1.6V±3%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R16D	-	CM7R153D-16B-T	LVR-IC	LDO, 1.6V±3%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R17	-	R1161N171D	LVR-IC	LDO, 1.7V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R17	-	TK11117CS	LVR-IC	LDO, 1.7V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R17	eb	XC6368F172MR	DC-DC-IC	PWM/PFM step-up, 1.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R170X	-	VRR1702LSX	LVR-IC	LDO, 1.7V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R175X	-	VRR1752LSX	LVR-IC	LDO, 1.75V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R17A	-	CM7R153A-17B-T	LVR-IC	LDO, 1.7V±3%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R17B	-	CM7R153B-17B-T	LVR-IC	LDO, 1.7V±3%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R17C	-	CM7R153C-17B-T	LVR-IC	LDO, 1.7V±3%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R17D	-	CM7R153D-17B-T	LVR-IC	LDO, 1.7V±3%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R18	-	NCP585DSN18T1	LVR-IC	LDO, 1.8V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons
R18	-	R1161N181D	LVR-IC	LDO, 1.8V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R18	-	TK11118CS	LVR-IC	LDO, 1.8V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R18	eb	XC6368F182MR	DC-DC-IC	PWM/PFM step-up, 1.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R180X	-	VRR1802LSX	LVR-IC	LDO, 1.8V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R185X	-	VRR1852LSX	LVR-IC	LDO, 1.85V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R18A	-	CM7R153A-18B-T	LVR-IC	LDO, 1.8V±3%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R18B	-	CM7R153B-18B-T	LVR-IC	LDO, 1.8V±3%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R18C	-	CM7R153C-18B-T	LVR-IC	LDO, 1.8V±3%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R18D	-	CM7R153D-18B-T	LVR-IC	LDO, 1.8V±3%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R19	-	R1161N191D	LVR-IC	LDO, 1.9V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R19	-	TK11119CS	LVR-IC	LDO, 1.9V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R19	eb	XC6368F192MR	DC-DC-IC	PWM/PFM step-up, 1.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R190X	-	VRR1902LSX	LVR-IC	LDO, 1.9V±20mV, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R195X	-	VRR1951NSX	LVR-IC	LDO, 1.95V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R19A	-	CM7R153A-19B-T	LVR-IC	LDO, 1.9V±3%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R19B	-	CM7R153B-19B-T	LVR-IC	LDO, 1.9V±3%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R19C	-	CM7R153C-19B-T	LVR-IC	LDO, 1.9V±3%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R19D	-	CM7R153D-19B-T	LVR-IC	LDO, 1.9V±3%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R1A	-	RP105N061D	LVR-IC	LDO, 0.6V±15mV, 400mA, +CE, CL	SOT-23-5	28ze	VR11	6g	Ric
R1A	-	XC6118C41AMR-G	Vdet-IC	4.1V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
R1B	-	LM4041BIM7-1.2	Vref-IC	µPower, Precision, Shunt, 1.225V±0.2%	SC-70-5	28dq	RF1	6a	Nsc
R1B	-	RP105N071D	LVR-IC	LDO, 0.7V±15mV, 400mA, +CE, CL	SOT-23-5	28ze	VR11	6g	Ric
R1B	-	XC6118C41BMR-G	Vdet-IC	4.1V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
R1C	-	LM4041CIM7-1.2	Vref-IC	µPower, Precision, Shunt, 1.225V±0.5%	SC-70-5	28dq	RF1	6a	Nsc
R1C	-	RP105N081D	LVR-IC	LDO, 0.8V±15mV, 400mA, +CE, CL	SOT-23-5	28ze	VR11	6g	Ric
R1C	-	XC6118C41CMR-G	Vdet-IC	4.1V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
R1D	-	LM4041DIM7-1.2	Vref-IC	µPower, Precision, Shunt, 1.225V±1%	SC-70-5	28dq	RF1	6a	Nsc
R1D	-	RP105N091D	LVR-IC	LDO, 0.9V±15mV, 400mA, +CE, CL	SOT-23-5	28ze	VR11	6g	Ric
R1D	-	XC6118C41DMR-G	Vdet-IC	4.1V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
R1E	-	LM4041EIM7-1.2	Vref-IC	µPower, Precision, Shunt, 1.225V±2%	SC-70-5	28dq	RF1	6a	Nsc
R1E	-	RP105N101D	LVR-IC	LDO, 1.0V±15mV, 400mA, +CE, CL	SOT-23-5	28ze	VR11	6g	Ric
R1F	-	RP105N121D	LVR-IC	LDO, 1.2V±15mV, 400mA, +CE, CL	SOT-23-5	28ze	VR11	6g	Ric
R1F	eb	XC6368F153MR	DC-DC-IC	PWM/PFM step-up, 1.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R1FA	-	CM7R153A-15A-T	LVR-IC	LDO, 1.55V±3%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R1FB	-	CM7R153B-15A-T	LVR-IC	LDO, 1.55V±3%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R1FC	-	CM7R153C-15A-T	LVR-IC	LDO, 1.55V±3%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R1FD	-	CM7R153D-15A-T	LVR-IC	LDO, 1.55V±3%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R1G	-	RP105N131D	LVR-IC	LDO, 1.3V±15mV, 400mA, +CE, CL	SOT-23-5	28ze	VR11	6g	Ric
R1GA	-	CM7R153A-16A-T	LVR-IC	LDO, 1.65V±3%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R1GB	-	CM7R153B-16A-T	LVR-IC	LDO, 1.65V±3%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R1GC	-	CM7R153C-16A-T	LVR-IC	LDO, 1.65V±3%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R1GD	-	CM7R153D-16A-T	LVR-IC	LDO, 1.65V±3%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R1H	-	RP105N141D	LVR-IC	LDO, 1.4V±15mV, 400mA, +CE, CL	SOT-23-5	28ze	VR11	6g	Ric
R1H	eb	XC6368F163MR	DC-DC-IC	PWM/PFM step-up, 1.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R1HA	-	CM7R153A-17A-T	LVR-IC	LDO, 1.75V±3%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R1HB	-	CM7R153B-17A-T	LVR-IC	LDO, 1.75V±3%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R1HC	-	CM7R153C-17A-T	LVR-IC	LDO, 1.75V±3%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R1HD	-	CM7R153D-17A-T	LVR-IC	LDO, 1.75V±3%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R1IA	-	CM7R153A-18A-T	LVR-IC	LDO, 1.85V±3%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R1IB	-	CM7R153B-18A-T	LVR-IC	LDO, 1.85V±3%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R1IC	-	CM7R153C-18A-T	LVR-IC	LDO, 1.85V±3%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R1ID	-	CM7R153D-18A-T	LVR-IC	LDO, 1.85V±3%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R1J	-	RP105N151D	LVR-IC	LDO, 1.5V±15mV, 400mA, +CE, CL	SOT-23-5	28ze	VR11	6g	Ric
R1JA	-	CM7R153A-19A-T	LVR-IC	LDO, 1.95V±3%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R1JB	-	CM7R153B-19A-T	LVR-IC	LDO, 1.95V±3%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R1JC	-	CM7R153C-19A-T	LVR-IC	LDO, 1.95V±3%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R1JD	-	CM7R153D-19A-T	LVR-IC	LDO, 1.95V±3%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R1K	-	RP105N111D	LVR-IC	LDO, 1.1V±15mV, 400mA, +CE, CL	SOT-23-5	28ze	VR11	6g	Ric
R1K	eb	XC6368F173MR	DC-DC-IC	PWM/PFM step-up, 1.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R1L	eb	XC6368F183MR	DC-DC-IC	PWM/PFM step-up, 1.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R1M	eb	XC6368F193MR	DC-DC-IC	PWM/PFM step-up, 1.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
r2	-	BD46E262G-M	Vdet-IC	2.6V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R2	-	R1121N221B	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
R2	-	TC7SZ08AFE	CMOS-Log	2-input AND gate	SON-5	30	Log3	6a	Tos
R20	-	R1161N201D	LVR-IC	LDO, 2.0V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R20	-	TK11120CS	LVR-IC	LDO, 2.0V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R20	eb	XC6368F202MR	DC-DC-IC	PWM/PFM step-up, 2.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R20	eh	XC6383C201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R200X	-	VRR2001NSX	LVR-IC	LDO, 2.0V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R202X	-	VRR2051NSX	LVR-IC	LDO, 2.05V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R20A	-	CM7R153A-20B-T	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R20B	-	CM7R153B-20B-T	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R20C	-	CM7R153C-20B-T	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R20D	-	CM7R153D-20B-T	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R21	-	R1161N211D	LVR-IC	LDO, 2.1V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R21	-	TK11121CS	LVR-IC	LDO, 2.1V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R21	eb	XC6368F212MR	DC-DC-IC	PWM/PFM step-up, 2.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R21	eh	XC6383C211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R210X	-	VRR2101NSX	LVR-IC	LDO, 2.1V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R215X	-	VRR2151NSX	LVR-IC	LDO, 2.15V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R21A	-	CM7R153A-21B-T	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R21B	-	CM7R153B-21B-T	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R21C	-	CM7R153C-21B-T	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R21D	-	CM7R153D-21B-T	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R22	-	R1161N221D	LVR-IC	LDO, 2.2V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R22	-	TK11122CS	LVR-IC	LDO, 2.2V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R22	eb	XC6368F222MR	DC-DC-IC	PWM/PFM step-up, 2.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R22	eh	XC6383C221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R220X	-	VRR2201NSX	LVR-IC	LDO, 2.2V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R225X	-	VRR2251NSX	LVR-IC	LDO, 2.25V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R22A	-	CM7R153A-22B-T	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R22B	-	CM7R153B-22B-T	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R22C	-	CM7R153C-22B-T	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R22D	-	CM7R153D-22B-T	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R23	-	R1161N231D	LVR-IC	LDO, 2.3V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R23	-	TC53N5202ECT	Vdet-IC	5.2V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
R23	-	TK11123CS	LVR-IC	LDO, 2.3V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R23	eb	XC6368F232MR	DC-DC-IC	PWM/PFM step-up, 2.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R23	eh	XC6383C231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R230X	-	VRR2301NSX	LVR-IC	LDO, 2.3V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R235X	-	VRR2351NSX	LVR-IC	LDO, 2.35V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R23A	-	CM7R153A-23B-T	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R23B	-	CM7R153B-23B-T	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R23C	-	CM7R153C-23B-T	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R23D	-	CM7R153D-23B-T	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R24	-	R1161N241D	LVR-IC	LDO, 2.4V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R24	-	TK11124CS	LVR-IC	LDO, 2.4V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R24	eb	XC6368F242MR	DC-DC-IC	PWM/PFM step-up, 2.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R24	eh	XC6383C241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R240X	-	VRR2401NSX	LVR-IC	LDO, 2.4V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R245X	-	VRR2451NSX	LVR-IC	LDO, 2.45V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R24A	-	CM7R153A-24B-T	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R24B	-	CM7R153B-24B-T	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R24C	-	CM7R153C-24B-T	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R24D	-	CM7R153D-24B-T	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R25	-	NCP585DSN25T1	LVR-IC	LDO, 2.5V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons
R25	-	R1161N251D	LVR-IC	LDO, 2.5V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R25	-	TK11125CS	LVR-IC	LDO, 2.5V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R25	eb	XC6368F252MR	DC-DC-IC	PWM/PFM step-up, 2.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R25	eh	XC6383C251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R250X	-	VRR2501NSX	LVR-IC	LDO, 2.5V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R255X	-	VRR2551NSX	LVR-IC	LDO, 2.55V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R25A	-	CM7R153A-25B-T	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R25B	-	CM7R153B-25B-T	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R25C	-	CM7R153C-25B-T	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R25D	-	CM7R153D-25B-T	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R26	-	R1161N261D	LVR-IC	LDO, 2.6V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R26	-	TK11126CS	LVR-IC	LDO, 2.6V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R26	eb	XC6368F262MR	DC-DC-IC	PWM/PFM step-up, 2.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R26	eh	XC6383C261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R260X	-	VRR2601NSX	LVR-IC	LDO, 2.6V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R265X	-	VRR2651NSX	LVR-IC	LDO, 2.65V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R26A	-	CM7R153A-26B-T	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R26B	-	CM7R153B-26B-T	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R26C	-	CM7R153C-26B-T	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R26D	-	CM7R153D-26B-T	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R27	-	R1161N271D	LVR-IC	LDO, 2.7V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R27	-	TK11127CS	LVR-IC	LDO, 2.7V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R27	eb	XC6368F272MR	DC-DC-IC	PWM/PFM step-up, 2.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R27	eh	XC6383C271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R270X	-	VRR2701NSX	LVR-IC	LDO, 2.7V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R275X	-	VRR2751NSX	LVR-IC	LDO, 2.75V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R27A	-	CM7R153A-27B-T	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R27B	-	CM7R153B-27B-T	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R27C	-	CM7R153C-27B-T	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R27D	-	CM7R153D-27B-T	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R28	-	NCP585DSN28T1	LVR-IC	LDO, 2.8V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons
R28	-	R1161N281D	LVR-IC	LDO, 2.8V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R28	-	TK11128CS	LVR-IC	LDO, 2.8V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R28	eb	XC6368F282MR	DC-DC-IC	PWM/PFM step-up, 2.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R28	eh	XC6383C281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R280X	-	VRR2801NSX	LVR-IC	LDO, 2.8V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R285X	-	VRR2851NSX	LVR-IC	LDO, 2.85V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R28A	-	CM7R153A-28B-T	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R28B	-	CM7R153B-28B-T	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R28C	-	CM7R153C-28B-T	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R28D	-	CM7R153D-28B-T	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R29	-	R1161N291D	LVR-IC	LDO, 2.9V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R29	-	TK11129CS	LVR-IC	LDO, 2.9V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R29	eb	XC6368F292MR	DC-DC-IC	PWM/PFM step-up, 2.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R29	eh	XC6383C291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R290X	-	VRR2901NSX	LVR-IC	LDO, 2.9V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R295X	-	VRR2951NSX	LVR-IC	LDO, 2.95V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R29A	-	CM7R153A-29B-T	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R29B	-	CM7R153B-29B-T	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R29C	-	CM7R153C-29B-T	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R29D	-	CM7R153D-29B-T	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R2A	-	XC6118C42AMR-G	Vdet-IC	4.2V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
R2A	eb	XC6368F203MR	DC-DC-IC	PWM/PFM step-up, 2.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R2AA	-	CM7R153A-20A-T	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2AB	-	CM7R153B-20A-T	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R2AC	-	CM7R153C-20A-T	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2AD	-	CM7R153D-20A-T	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R2B	-	LM4040B25H5TA	Vref-IC	µPower, Precision, Shunt, 2.50V±0.2%	SC-70-5	28dq	RF1	6a	Zx
R2B	-	LM4040BIM7-2.5	Vref-IC	µPower, Precision, Shunt, 2.50V±0.2%	SC-70-5	28dq	RF1	6a	Nsc
R2B	-	XC6118C42BMR-G	Vdet-IC	4.2V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
R2B	eb	XC6368F213MR	DC-DC-IC	PWM/PFM step-up, 2.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R2BA	-	CM7R153A-21A-T	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2BB	-	CM7R153B-21A-T	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R2BC	-	CM7R153C-21A-T	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2BD	-	CM7R153D-21A-T	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R2C	-	LM4040C25H5TA	Vref-IC	µPower, Precision, Shunt, 2.50V±0.5%	SC-70-5	28dq	RF1	6a	Zx
R2C	-	LM4040CIM7-2.5	Vref-IC	µPower, Precision, Shunt, 2.50V±0.5%	SC-70-5	28dq	RF1	6a	Nsc
R2C	-	XC6118C42CMR-G	Vdet-IC	4.2V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
R2C	eb	XC6368F223MR	DC-DC-IC	PWM/PFM step-up, 2.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R2CA	-	CM7R153A-22A-T	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2CB	-	CM7R153B-22A-T	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R2CC	-	CM7R153C-22A-T	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2CD	-	CM7R153D-22A-T	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R2D	-	LM4040D25H5TA	Vref-IC	µPower, Precision, Shunt, 2.50V±1%	SC-70-5	28dq	RF1	6a	Zx
R2D	-	LM4040DIM7-2.5	Vref-IC	µPower, Precision, Shunt, 2.50V±1%	SC-70-5	28dq	RF1	6a	Nsc
R2D	-	XC6118C42DMR-G	Vdet-IC	4.2V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
R2D	eb	XC6368F233MR	DC-DC-IC	PWM/PFM step-up, 2.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R2DA	-	CM7R153A-23A-T	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2DB	-	CM7R153B-23A-T	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R2DC	-	CM7R153C-23A-T	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2DD	-	CM7R153D-23A-T	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R2E	-	LM4040EIM7-2.5	Vref-IC	µPower, Precision, Shunt, 2.50V±2%	SC-70-5	28dq	RF1	6a	Nsc
R2E	eb	XC6368F243MR	DC-DC-IC	PWM/PFM step-up, 2.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R2EA	-	CM7R153A-24A-T	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2EB	-	CM7R153B-24A-T	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R2EC	-	CM7R153C-24A-T	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R2ED	-	CM7R153D-24A-T	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R2F	eb	XC6368F253MR	DC-DC-IC	PWM/PFM step-up, 2.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R2FA	-	CM7R153A-25A-T	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2FB	-	CM7R153B-25A-T	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R2FC	-	CM7R153C-25A-T	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2FD	-	CM7R153D-25A-T	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R2GA	-	CM7R153A-26A-T	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2GB	-	CM7R153B-26A-T	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R2GC	-	CM7R153C-26A-T	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2GD	-	CM7R153D-26A-T	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R2H	eb	XC6368F263MR	DC-DC-IC	PWM/PFM step-up, 2.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R2HA	-	CM7R153A-27A-T	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2HB	-	CM7R153B-27A-T	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R2HC	-	CM7R153C-27A-T	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2HD	-	CM7R153D-27A-T	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R2IA	-	CM7R153A-28A-T	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2IB	-	CM7R153B-28A-T	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R2IC	-	CM7R153C-28A-T	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2ID	-	CM7R153D-28A-T	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R2JA	-	CM7R153A-29A-T	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2JB	-	CM7R153B-29A-T	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R2JC	-	CM7R153C-29A-T	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R2JD	-	CM7R153D-29A-T	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R2K	eb	XC6368F273MR	DC-DC-IC	PWM/PFM step-up, 2.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R2L	eb	XC6368F283MR	DC-DC-IC	PWM/PFM step-up, 2.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R2M	eb	XC6368F293MR	DC-DC-IC	PWM/PFM step-up, 2.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
r3	-	BD46E272G-M	Vdet-IC	2.7V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
R3	-	R1121N231B	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
R3	-	TC7SZ02AFE	CMOS-Log	2-input NOR gate	SON-5	30	Log2	6a	Tos
R30	-	NCP585DSN30T1	LVR-IC	LDO, 3.0V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons
R30	-	R1161N301D	LVR-IC	LDO, 3.0V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R30	-	TK11130CS	LVR-IC	LDO, 3.0V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R30	eb	XC6368F302MR	DC-DC-IC	PWM/PFM step-up, 3.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R30	eh	XC6383C301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R300X	-	VRR3001NSX	LVR-IC	LDO, 3.0V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R305X	-	VRR3051NSX	LVR-IC	LDO, 3.05V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R30A	-	CM7R153A-30B-T	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R30B	-	CM7R153B-30B-T	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R30C	-	CM7R153C-30B-T	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R30D	-	CM7R153D-30B-T	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R31	-	R1161N311D	LVR-IC	LDO, 3.1V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R31	-	TK11131CS	LVR-IC	LDO, 3.1V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R31	eb	XC6368F312MR	DC-DC-IC	PWM/PFM step-up, 3.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R31	eh	XC6383C311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R310X	-	VRR3101NSX	LVR-IC	LDO, 3.1V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R315X	-	VRR3151NSX	LVR-IC	LDO, 3.15V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R31A	-	CM7R153A-31B-T	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R31B	-	CM7R153B-31B-T	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R31C	-	CM7R153C-31B-T	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R31D	-	CM7R153D-31B-T	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R32	-	R1161N321D	LVR-IC	LDO, 3.2V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R32	-	TK11132CS	LVR-IC	LDO, 3.2V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R32	eb	XC6368F322MR	DC-DC-IC	PWM/PFM step-up, 3.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R32	eh	XC6383C321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R320X	-	VRR3201NSX	LVR-IC	LDO, 3.2V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R325X	-	VRR3251NSX	LVR-IC	LDO, 3.25V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R32A	-	CM7R153A-32B-T	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R32B	-	CM7R153B-32B-T	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R32C	-	CM7R153C-32B-T	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R32D	-	CM7R153D-32B-T	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R33	-	NCP585DSN33T1	LVR-IC	LDO, 3.3V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ons
R33	-	R1161N331D	LVR-IC	LDO, 3.3V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
R33	-	TC53N5302ECT	Vdet-IC	5.3V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
R33	-	TK11133CS	LVR-IC	LDO, 3.3V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R33	eb	XC6368F332MR	DC-DC-IC	PWM/PFM step-up, 3.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R33	eh	XC6383C331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R330X	-	VRR3301NSX	LVR-IC	LDO, 3.3V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R335X	-	VRR3351NSX	LVR-IC	LDO, 3.35V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R33A	-	CM7R153A-33B-T	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R33B	-	CM7R153B-33B-T	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R33C	-	CM7R153C-33B-T	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R33D	-	CM7R153D-33B-T	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R34	-	TK11134CS	LVR-IC	LDO, 3.4V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R34	eb	XC6368F342MR	DC-DC-IC	PWM/PFM step-up, 3.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R34	eh	XC6383C341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R340X	-	VRR3401NSX	LVR-IC	LDO, 3.4V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R345X	-	VRR3451NSX	LVR-IC	LDO, 3.45V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R34A	-	CM7R153A-34B-T	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R34B	-	CM7R153B-34B-T	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R34C	-	CM7R153C-34B-T	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R34D	-	CM7R153D-34B-T	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R35	-	TK11135CS	LVR-IC	LDO, 3.5V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R35	eb	XC6368F352MR	DC-DC-IC	PWM/PFM step-up, 3.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R35	eh	XC6383C351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R350X	-	VRR3501NSX	LVR-IC	LDO, 3.5V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R355X	-	VRR3551NSX	LVR-IC	LDO, 3.55V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R35A	-	CM7R153A-35B-T	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R35B	-	CM7R153B-35B-T	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R35C	-	CM7R153C-35B-T	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R35D	-	CM7R153D-35B-T	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R36	-	TK11136CS	LVR-IC	LDO, 3.6V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R36	eb	XC6368F362MR	DC-DC-IC	PWM/PFM step-up, 3.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R36	eh	XC6383C361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R360X	-	VRR3601NSX	LVR-IC	LDO, 3.6V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R365X	-	VRR3651NSX	LVR-IC	LDO, 3.65V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R36A	-	CM7R153A-36B-T	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R36B	-	CM7R153B-36B-T	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R36C	-	CM7R153C-36B-T	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R36D	-	CM7R153D-36B-T	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R37	-	TK11137CS	LVR-IC	LDO, 3.7V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R37	eb	XC6368F372MR	DC-DC-IC	PWM/PFM step-up, 3.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R37	eh	XC6383C371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R370X	-	VRR3701NSX	LVR-IC	LDO, 3.7V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R375X	-	VRR3751NSX	LVR-IC	LDO, 3.75V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R37A	-	CM7R153A-37B-T	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDRV	SOT-23-5	28vt	VR4	6a	Can
R37B	-	CM7R153B-37B-T	LVR-IC	LDO, 3.7V±2%, 150mA, +CEV	SOT-23-5	28vt	VR4	6a	Can
R37C	-	CM7R153C-37B-T	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PDRV	SOT-23-5	28vt	VR4	6a	Can
R37D	-	CM7R153D-37B-T	LVR-IC	LDO, 3.7V±2%, 150mA, -CEV	SOT-23-5	28vt	VR4	6a	Can
R38	-	TK11138CS	LVR-IC	LDO, 3.8V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R38	eb	XC6368F382MR	DC-DC-IC	PWM/PFM step-up, 3.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R38	eh	XC6383C381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R380X	-	VRR3801NSX	LVR-IC	LDO, 3.8V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R385X	-	VRR3851NSX	LVR-IC	LDO, 3.85V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R38A	-	CM7R153A-38B-T	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R38B	-	CM7R153B-38B-T	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R38C	-	CM7R153C-38B-T	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R38D	-	CM7R153D-38B-T	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R39	-	TK11139CS	LVR-IC	LDO, 3.9V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R39	eb	XC6368F392MR	DC-DC-IC	PWM/PFM step-up, 3.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R39	eh	XC6383C391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R390X	-	VRR3901NSX	LVR-IC	LDO, 3.9V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R395X	-	VRR3951NSX	LVR-IC	LDO, 3.95V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R39A	-	CM7R153A-39B-T	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R39B	-	CM7R153B-39B-T	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R39C	-	CM7R153C-39B-T	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R39D	-	CM7R153D-39B-T	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R3A	-	XC6118C43AMR-G	Vdet-IC	4.3V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
R3A	eb	XC6368F303MR	DC-DC-IC	PWM/PFM step-up, 3.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R3AA	-	CM7R153A-30A-T	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3AB	-	CM7R153B-30A-T	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R3AC	-	CM7R153C-30A-T	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3AD	-	CM7R153D-30A-T	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R3B	-	LM4040B30H5TA	Vref-IC	µPower, Precision, Shunt, 3.00V±0.2%	SC-70-5	28dq	RF1	6a	Zx
R3B	-	XC6118C43BMR-G	Vdet-IC	4.3V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
R3B	eb	XC6368F313MR	DC-DC-IC	PWM/PFM step-up, 3.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R3BA	-	CM7R153A-31A-T	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3BB	-	CM7R153B-31A-T	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R3BC	-	CM7R153C-31A-T	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3BD	-	CM7R153D-31A-T	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R3C	-	LM4040C30H5TA	Vref-IC	µPower, Precision, Shunt, 3.00V±0.5%	SC-70-5	28dq	RF1	6a	Zx



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R3C	-	XC6118C43CMR-G	Vdet-IC	4.3V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
R3C	eb	XC6368F323MR	DC-DC-IC	PWM/PFM step-up, 3.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R3CA	-	CM7R153A-32A-T	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3CB	-	CM7R153B-32A-T	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R3CC	-	CM7R153C-32A-T	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3CD	-	CM7R153D-32A-T	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R3D	-	LM4040D30H5TA	Vref-IC	µPower, Precision, Shunt, 3.00V±1%	SC-70-5	28dq	RF1	6a	Zx
R3D	-	XC6118C43DMR-G	Vdet-IC	4.3V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
R3D	eb	XC6368F333MR	DC-DC-IC	PWM/PFM step-up, 3.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R3DA	-	CM7R153A-33A-T	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3DB	-	CM7R153B-33A-T	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R3DC	-	CM7R153C-33A-T	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3DD	-	CM7R153D-33A-T	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R3E	eb	XC6368F343MR	DC-DC-IC	PWM/PFM step-up, 3.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R3EA	-	CM7R153A-34A-T	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3EB	-	CM7R153B-34A-T	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R3EC	-	CM7R153C-34A-T	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3ED	-	CM7R153D-34A-T	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R3F	eb	XC6368F353MR	DC-DC-IC	PWM/PFM step-up, 3.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R3FA	-	CM7R153A-35A-T	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3FB	-	CM7R153B-35A-T	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R3FC	-	CM7R153C-35A-T	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3FD	-	CM7R153D-35A-T	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R3GA	-	CM7R153A-36A-T	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3GB	-	CM7R153B-36A-T	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R3GC	-	CM7R153C-36A-T	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3GD	-	CM7R153D-36A-T	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R3H	eb	XC6368F363MR	DC-DC-IC	PWM/PFM step-up, 3.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R3HA	-	CM7R153A-37A-T	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3HB	-	CM7R153B-37A-T	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R3HC	-	CM7R153C-37A-T	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3HD	-	CM7R153D-37A-T	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R3IA	-	CM7R153A-38A-T	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3IB	-	CM7R153B-38A-T	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R3IC	-	CM7R153C-38A-T	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3ID	-	CM7R153D-38A-T	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R3JA	-	CM7R153A-39A-T	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3JB	-	CM7R153B-39A-T	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R3JC	-	CM7R153C-39A-T	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R3JD	-	CM7R153D-39A-T	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R3K	eb	XC6368F373MR	DC-DC-IC	PWM/PFM step-up, 3.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R3L	eb	XC6368F383MR	DC-DC-IC	PWM/PFM step-up, 3.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R3M	eb	XC6368F393MR	DC-DC-IC	PWM/PFM step-up, 3.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
r4	-	BD46E282G-M	Vdet-IC	2.8V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
R4	-	R1121N241B	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
R4	-	TC7SZ32AFE	CMOS-Log	2-input OR gate	SON-5	30	Log4	6a	Tos
R40	-	TK11140CS	LVR-IC	LDO, 4.0V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R40	eb	XC6368F402MR	DC-DC-IC	PWM/PFM step-up, 4.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R40	eh	XC6383C401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R400X	-	VRR4001NSX	LVR-IC	LDO, 4.0V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R405X	-	VRR4051NSX	LVR-IC	LDO, 4.05V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R40A	-	CM7R153A-40B-T	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R40B	-	CM7R153B-40B-T	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R40C	-	CM7R153C-40B-T	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R40D	-	CM7R153D-40B-T	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R41	-	TK11141CS	LVR-IC	LDO, 4.1V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R41	eb	XC6368F412MR	DC-DC-IC	PWM/PFM step-up, 4.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R41	eh	XC6383C411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R410X	-	VRR4101NSX	LVR-IC	LDO, 4.1V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R415X	-	VRR4151NSX	LVR-IC	LDO, 4.15V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R41A	-	CM7R153A-41B-T	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R41B	-	CM7R153B-41B-T	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R41C	-	CM7R153C-41B-T	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R41D	-	CM7R153D-41B-T	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R42	-	TK11142CS	LVR-IC	LDO, 4.2V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R42	eb	XC6368F422MR	DC-DC-IC	PWM/PFM step-up, 4.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R42	eh	XC6383C421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R420X	-	VRR4201NSX	LVR-IC	LDO, 4.2V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R425X	-	VRR4251NSX	LVR-IC	LDO, 4.25V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R42A	-	CM7R153A-42B-T	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R42B	-	CM7R153B-42B-T	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R42C	-	CM7R153C-42B-T	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R42D	-	CM7R153D-42B-T	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R43	-	TC53N5402ECT	Vdet-IC	5.4V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
R43	-	TK11143CS	LVR-IC	LDO, 4.3V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R43	eb	XC6368F432MR	DC-DC-IC	PWM/PFM step-up, 4.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R43	eh	XC6383C431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R430X	-	VRR4301NSX	LVR-IC	LDO, 4.3V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R435X	-	VRR4351NSX	LVR-IC	LDO, 4.35V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R43A	-	CM7R153A-43B-T	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R43B	-	CM7R153B-43B-T	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R43C	-	CM7R153C-43B-T	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R43D	-	CM7R153D-43B-T	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R44	-	TK11144CS	LVR-IC	LDO, 4.4V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R44	eb	XC6368F442MR	DC-DC-IC	PWM/PFM step-up, 4.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R44	eh	XC6383C441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R440X	-	VRR4401NSX	LVR-IC	LDO, 4.4V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R445X	-	VRR4451NSX	LVR-IC	LDO, 4.45V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R44A	-	CM7R153A-44B-T	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R44B	-	CM7R153B-44B-T	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R44C	-	CM7R153C-44B-T	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R44D	-	CM7R153D-44B-T	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R45	-	TK11145CS	LVR-IC	LDO, 4.5V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R45	eb	XC6368F452MR	DC-DC-IC	PWM/PFM step-up, 4.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R45	eh	XC6383C451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R450X	-	VRR4501NSX	LVR-IC	LDO, 4.5V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R455X	-	VRR4551NSX	LVR-IC	LDO, 4.55V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R45A	-	CM7R153A-45B-T	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R45B	-	CM7R153B-45B-T	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R45C	-	CM7R153C-45B-T	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R45D	-	CM7R153D-45B-T	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R46	-	TK11146CS	LVR-IC	LDO, 4.6V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R46	eb	XC6368F462MR	DC-DC-IC	PWM/PFM step-up, 4.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R46	eh	XC6383C461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R460X	-	VRR4601NSX	LVR-IC	LDO, 4.6V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R465X	-	VRR4651NSX	LVR-IC	LDO, 4.65V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R46A	-	CM7R153A-46B-T	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R46B	-	CM7R153B-46B-T	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R46C	-	CM7R153C-46B-T	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R46D	-	CM7R153D-46B-T	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R47	-	TK11147CS	LVR-IC	LDO, 4.7V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R47	eb	XC6368F472MR	DC-DC-IC	PWM/PFM step-up, 4.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R47	eh	XC6383C471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R470X	-	VRR4701NSX	LVR-IC	LDO, 4.7V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R475X	-	VRR4751NSX	LVR-IC	LDO, 4.75V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R47A	-	CM7R153A-47B-T	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R47B	-	CM7R153B-47B-T	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R47C	-	CM7R153C-47B-T	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R47D	-	CM7R153D-47B-T	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R48	-	TK11148CS	LVR-IC	LDO, 4.8V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R48	eb	XC6368F482MR	DC-DC-IC	PWM/PFM step-up, 4.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R48	eh	XC6383C481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R480X	-	VRR4801NSX	LVR-IC	LDO, 4.8V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R485X	-	VRR4851NSX	LVR-IC	LDO, 4.85V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R48A	-	CM7R153A-48B-T	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R48B	-	CM7R153B-48B-T	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R48C	-	CM7R153C-48B-T	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R48D	-	CM7R153D-48B-T	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R49	-	TK11149CS	LVR-IC	LDO, 4.9V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R49	eb	XC6368F492MR	DC-DC-IC	PWM/PFM step-up, 4.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R49	eh	XC6383C491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R490X	-	VRR4901NSX	LVR-IC	LDO, 4.9V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R495X	-	VRR4951NSX	LVR-IC	LDO, 4.95V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R49A	-	CM7R153A-49B-T	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R49B	-	CM7R153B-49B-T	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R49C	-	CM7R153C-49B-T	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R49D	-	CM7R153D-49B-T	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R4A	-	XC6118C44AMR-G	Vdet-IC	4.4V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
R4A	eb	XC6368F403MR	DC-DC-IC	PWM/PFM step-up, 4.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R4AA	-	CM7R153A-40A-T	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R4AB	-	CM7R153B-40A-T	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R4AC	-	CM7R153C-40A-T	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4AD	-	CM7R153D-40A-T	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R4B	-	LM4040BIM7-4.1	Vref-IC	µPower, Precision, Shunt, 4.10V±0.2%	SC-70-5	28dq	RF1	6a	Nsc
R4B	-	XC6118C44BMR-G	Vdet-IC	4.4V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
R4B	eb	XC6368F413MR	DC-DC-IC	PWM/PFM step-up, 4.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R4BA	-	CM7R153A-41A-T	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4BB	-	CM7R153B-41A-T	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R4BC	-	CM7R153C-41A-T	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4BD	-	CM7R153D-41A-T	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R4C	-	LM4040CIM7-4.1	Vref-IC	µPower, Precision, Shunt, 4.10V±0.5%	SC-70-5	28dq	RF1	6a	Nsc
R4C	-	XC6118C44CMR-G	Vdet-IC	4.4V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
R4C	eb	XC6368F423MR	DC-DC-IC	PWM/PFM step-up, 4.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R4CA	-	CM7R153A-42A-T	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4CB	-	CM7R153B-42A-T	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R4CC	-	CM7R153C-42A-T	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4CD	-	CM7R153D-42A-T	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R4D	-	LM4040DIM7-4.1	Vref-IC	µPower, Precision, Shunt, 4.10V±1%	SC-70-5	28dq	RF1	6a	Nsc
R4D	-	XC6118C44DMR-G	Vdet-IC	4.4V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
R4D	eb	XC6368F433MR	DC-DC-IC	PWM/PFM step-up, 4.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R4DA	-	CM7R153A-43A-T	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4DB	-	CM7R153B-43A-T	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R4DC	-	CM7R153C-43A-T	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4DD	-	CM7R153D-43A-T	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R4E	eb	XC6368F443MR	DC-DC-IC	PWM/PFM step-up, 4.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R4EA	-	CM7R153A-44A-T	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4EB	-	CM7R153B-44A-T	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R4EC	-	CM7R153C-44A-T	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4ED	-	CM7R153D-44A-T	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R4F	eb	XC6368F453MR	DC-DC-IC	PWM/PFM step-up, 4.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R4FA	-	CM7R153A-45A-T	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4FB	-	CM7R153B-45A-T	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R4FC	-	CM7R153C-45A-T	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4FD	-	CM7R153D-45A-T	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R4GA	-	CM7R153A-46A-T	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4GB	-	CM7R153B-46A-T	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R4GC	-	CM7R153C-46A-T	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4GD	-	CM7R153D-46A-T	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R4H	eb	XC6368F463MR	DC-DC-IC	PWM/PFM step-up, 4.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R4HA	-	CM7R153A-47A-T	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4HB	-	CM7R153B-47A-T	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R4HC	-	CM7R153C-47A-T	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4HD	-	CM7R153D-47A-T	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R4IA	-	CM7R153A-48A-T	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4IB	-	CM7R153B-48A-T	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R4IC	-	CM7R153C-48A-T	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4ID	-	CM7R153D-48A-T	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R4JA	-	CM7R153A-49A-T	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4JB	-	CM7R153B-49A-T	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R4JC	-	CM7R153C-49A-T	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R4JD	-	CM7R153D-49A-T	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R4K	eb	XC6368F473MR	DC-DC-IC	PWM/PFM step-up, 4.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R4L	eb	XC6368F483MR	DC-DC-IC	PWM/PFM step-up, 4.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R4M	eb	XC6368F493MR	DC-DC-IC	PWM/PFM step-up, 4.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
r5	-	BD46E292G-M	Vdet-IC	2.9V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
R5	-	R1121N251B	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
R5	-	TC7SZ04AFE	CMOS-Log	Inverter	SON-5	30	Log6	6a	Tos
R50	-	TK11150CS	LVR-IC	LDO, 5.0V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
R50	eb	XC6368F502MR	DC-DC-IC	PWM/PFM step-up, 5.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R50	eh	XC6383C501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R500X	-	VRR5001NSX	LVR-IC	LDO, 5.0V1%, 250mA, +CE	SOT-23-5	28cx	VR4	6r	Ans
R50A	-	CM7R153A-50B-T	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R50B	-	CM7R153B-50B-T	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R50C	-	CM7R153C-50B-T	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R50D	-	CM7R153D-50B-T	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R51	eb	XC6368F512MR	DC-DC-IC	PWM/PFM step-up, 5.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R51	eh	XC6383C511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R51A	-	CM7R153A-51B-T	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R51B	-	CM7R153B-51B-T	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R51C	-	CM7R153C-51B-T	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R51D	-	CM7R153D-51B-T	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R52	eb	XC6368F522MR	DC-DC-IC	PWM/PFM step-up, 5.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R52	eh	XC6383C521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R52A	-	CM7R153A-52B-T	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R52B	-	CM7R153B-52B-T	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R52C	-	CM7R153C-52B-T	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R52D	-	CM7R153D-52B-T	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R53	-	TC53N5502ECT	Vdet-IC	5.5V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
R53	eb	XC6368F532MR	DC-DC-IC	PWM/PFM step-up, 5.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R53	eh	XC6383C531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R53A	-	CM7R153A-53B-T	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R53B	-	CM7R153B-53B-T	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R53C	-	CM7R153C-53B-T	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R53D	-	CM7R153D-53B-T	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R54	eb	XC6368F542MR	DC-DC-IC	PWM/PFM step-up, 5.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R54	eh	XC6383C541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R54A	-	CM7R153A-54B-T	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R54B	-	CM7R153B-54B-T	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R54C	-	CM7R153C-54B-T	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R54D	-	CM7R153D-54B-T	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R55	eb	XC6368F552MR	DC-DC-IC	PWM/PFM step-up, 5.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R55	eh	XC6383C551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R55A	-	CM7R153A-55B-T	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R55B	-	CM7R153B-55B-T	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R55C	-	CM7R153C-55B-T	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R55D	-	CM7R153D-55B-T	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R56	eb	XC6368F562MR	DC-DC-IC	PWM/PFM step-up, 5.6V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R56	eh	XC6383C561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R56A	-	CM7R153A-56B-T	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R56B	-	CM7R153B-56B-T	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R56C	-	CM7R153C-56B-T	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R56D	-	CM7R153D-56B-T	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R57	eb	XC6368F572MR	DC-DC-IC	PWM/PFM step-up, 5.7V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R57	eh	XC6383C571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R57A	-	CM7R153A-57B-T	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R57B	-	CM7R153B-57B-T	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R57C	-	CM7R153C-57B-T	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R57D	-	CM7R153D-57B-T	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R58	eb	XC6368F582MR	DC-DC-IC	PWM/PFM step-up, 5.8V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R58	eh	XC6383C581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R58A	-	CM7R153A-58B-T	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R58B	-	CM7R153B-58B-T	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R58C	-	CM7R153C-58B-T	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R58D	-	CM7R153D-58B-T	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R59	eb	XC6368F592MR	DC-DC-IC	PWM/PFM step-up, 5.9V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R59	eh	XC6383C591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R59A	-	CM7R153A-59B-T	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R59B	-	CM7R153B-59B-T	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R59C	-	CM7R153C-59B-T	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R59D	-	CM7R153D-59B-T	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R5A	-	XC6118C45AMR-G	Vdet-IC	4.5V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
R5A	eb	XC6368F503MR	DC-DC-IC	PWM/PFM step-up, 5.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R5AA	-	CM7R153A-50A-T	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5AB	-	CM7R153B-50A-T	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R5AC	-	CM7R153C-50A-T	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5AD	-	CM7R153D-50A-T	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R5B	-	LM4040B50H5TA	Vref-IC	µPower, Precision, Shunt, 5.00V±0.2%	SC-70-5	28dq	RF1	6a	Zx
R5B	-	LM4040BIM7-5.0	Vref-IC	µPower, Precision, Shunt, 5.00V±0.2%	SC-70-5	28dq	RF1	6a	Nsc
R5B	-	XC6118C45BMR-G	Vdet-IC	4.5V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
R5B	eb	XC6368F513MR	DC-DC-IC	PWM/PFM step-up, 5.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R5BA	-	CM7R153A-51A-T	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5BB	-	CM7R153B-51A-T	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R5BC	-	CM7R153C-51A-T	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5BD	-	CM7R153D-51A-T	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R5C	-	LM4040C50H5TA	Vref-IC	µPower, Precision, Shunt, 5.00V±0.5%	SC-70-5	28dq	RF1	6a	Zx
R5C	-	LM4040CIM7-5.0	Vref-IC	µPower, Precision, Shunt, 5.00V±0.5%	SC-70-5	28dq	RF1	6a	Nsc
R5C	-	XC6118C45CMR-G	Vdet-IC	4.5V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
R5C	eb	XC6368F523MR	DC-DC-IC	PWM/PFM step-up, 5.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R5CA	-	CM7R153A-52A-T	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5CB	-	CM7R153B-52A-T	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R5CC	-	CM7R153C-52A-T	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5CD	-	CM7R153D-52A-T	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R5D	-	LM4040D50H5TA	Vref-IC	µPower, Precision, Shunt, 5.00V±1%	SC-70-5	28dq	RF1	6a	Zx
R5D	-	LM4040DIM7-5.0	Vref-IC	µPower, Precision, Shunt, 5.00V±1%	SC-70-5	28dq	RF1	6a	Nsc
R5D	-	XC6118C45DMR-G	Vdet-IC	4.5V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
R5D	eb	XC6368F533MR	DC-DC-IC	PWM/PFM step-up, 5.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R5DA	-	CM7R153A-53A-T	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5DB	-	CM7R153B-53A-T	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R5DC	-	CM7R153C-53A-T	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5DD	-	CM7R153D-53A-T	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R5E	eb	XC6368F543MR	DC-DC-IC	PWM/PFM step-up, 5.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R5EA	-	CM7R153A-54A-T	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5EB	-	CM7R153B-54A-T	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R5EC	-	CM7R153C-54A-T	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5ED	-	CM7R153D-54A-T	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R5F	eb	XC6368F553MR	DC-DC-IC	PWM/PFM step-up, 5.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R5FA	-	CM7R153A-55A-T	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5FB	-	CM7R153B-55A-T	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R5FC	-	CM7R153C-55A-T	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5FD	-	CM7R153D-55A-T	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R5GA	-	CM7R153A-56A-T	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5GB	-	CM7R153B-56A-T	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R5GC	-	CM7R153C-56A-T	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5GD	-	CM7R153D-56A-T	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R5H	eb	XC6368F563MR	DC-DC-IC	PWM/PFM step-up, 5.6V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R5HA	-	CM7R153A-57A-T	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5HB	-	CM7R153B-57A-T	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R5HC	-	CM7R153C-57A-T	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5HD	-	CM7R153D-57A-T	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R5IA	-	CM7R153A-58A-T	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5IB	-	CM7R153B-58A-T	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R5IC	-	CM7R153C-58A-T	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5ID	-	CM7R153D-58A-T	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R5JA	-	CM7R153A-59A-T	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5JB	-	CM7R153B-59A-T	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R5JC	-	CM7R153C-59A-T	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R5JD	-	CM7R153D-59A-T	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R5K	eb	XC6368F573MR	DC-DC-IC	PWM/PFM step-up, 5.7V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R5L	eb	XC6368F583MR	DC-DC-IC	PWM/PFM step-up, 5.8V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R5M	eb	XC6368F593MR	DC-DC-IC	PWM/PFM step-up, 5.9V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
r6	-	BD46E302G-M	Vdet-IC	3.0V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
R6	-	R1121N261B	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
R6	-	TC7SZU04AFE	CMOS-Log	Inverter	SON-5	30	Log6	6a	Tos
R60	eb	XC6368F602MR	DC-DC-IC	PWM/PFM step-up, 6.0V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R60	eh	XC6383C601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R60A	-	CM7R153A-60B-T	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R60B	-	CM7R153B-60B-T	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6a	Can
R60C	-	CM7R153C-60B-T	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PDR	SOT-23-5	28vt	VR4	6a	Can
R60D	-	CM7R153D-60B-T	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-23-5	28vt	VR4	6a	Can
R61	eb	XC6368F612MR	DC-DC-IC	PWM/PFM step-up, 6.1V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R61	eh	XC6383C611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R62	eb	XC6368F622MR	DC-DC-IC	PWM/PFM step-up, 6.2V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R62	eh	XC6383C621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R63	-	TC53N5602ECT	Vdet-IC	5.6V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
R63	eb	XC6368F632MR	DC-DC-IC	PWM/PFM step-up, 6.3V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R63	eh	XC6383C631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R64	eb	XC6368F642MR	DC-DC-IC	PWM/PFM step-up, 6.4V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R64	eh	XC6383C641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R65	eb	XC6368F652MR	DC-DC-IC	PWM/PFM step-up, 6.5V±2.5%, 200mA, 180kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R65	eh	XC6383C651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R66	eh	XC6383C661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R67	eh	XC6383C671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R68	eh	XC6383C681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R69	eh	XC6383C691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R6A	-	XC6118C46AMR-G	Vdet-IC	4.6V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
R6A	eb	XC6368F603MR	DC-DC-IC	PWM/PFM step-up, 6.0V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R6B	-	XC6118C46BMR-G	Vdet-IC	4.6V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
R6B	eb	XC6368F613MR	DC-DC-IC	PWM/PFM step-up, 6.1V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R6C	-	XC6118C46CMR-G	Vdet-IC	4.6V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
R6C	eb	XC6368F623MR	DC-DC-IC	PWM/PFM step-up, 6.2V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R6D	-	LM4040DIM7-6.0	Vref-IC	μPower, Precision, Shunt, 6.00V±1%	SC-70-5	28dq	RF1	6a	Nsc
R6D	-	XC6118C46DMR-G	Vdet-IC	4.6V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
R6D	eb	XC6368F633MR	DC-DC-IC	PWM/PFM step-up, 6.3V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R6E	eb	XC6368F643MR	DC-DC-IC	PWM/PFM step-up, 6.4V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
R6F	eb	XC6368F653MR	DC-DC-IC	PWM/PFM step-up, 6.5V±2.5%, 200mA, 300kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
r7	-	BD46E312G-M	Vdet-IC	3.1V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
R7	-	R1121N271B	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
R70	eh	XC6383C701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, +CE	SOT-23-5	28sc	DC3	6g	Tor
R73	-	TC53N5702ECT	Vdet-IC	5.7V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
R7A	-	XC6118C47AMR-G	Vdet-IC	4.7V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
R7B	-	XC6118C47BMR-G	Vdet-IC	4.7V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
R7C	-	XC6118C47CMR-G	Vdet-IC	4.7V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
R7D	-	XC6118C47DMR-G	Vdet-IC	4.7V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
r8	-	BD46E322G-M	Vdet-IC	3.2V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
R8	-	R1121N281B	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
R83	-	TC53N5802ECT	Vdet-IC	5.8V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
R8A	-	LM4040AIM7-8.2	Vref-IC	μPower, Precision, Shunt, 8.192V±0.1%	SC-70-5	28dq	RF1	6a	Nsc
R8A	-	XC6118C48AMR-G	Vdet-IC	4.8V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
R8B	-	XC6118C48BMR-G	Vdet-IC	4.8V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
R8C	-	XC6118C48CMR-G	Vdet-IC	4.8V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
R8D	-	XC6118C48DMR-G	Vdet-IC	4.8V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
r9	-	BD46E332G-M	Vdet-IC	3.3V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
R9	-	R1121N291B	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
R93	-	TC53N5902ECT	Vdet-IC	5.9V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
R9A	-	XC6118C49AMR-G	Vdet-IC	4.9V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
R9B	-	XC6118C49BMR-G	Vdet-IC	4.9V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
R9C	-	XC6118C49CMR-G	Vdet-IC	4.9V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
R9D	-	XC6118C49DMR-G	Vdet-IC	4.9V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
Ra	-	BD53E43G-M	Vdet-IC	4.3V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RA	-	BD5340FVE	Vdet-IC	4.0V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RA	-	BD5340G	Vdet-IC	4.0V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RAA	-	RP114N321B	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
RAA	-	TLV431ASN	Vref-IC	Programable 1.24..16V±1%,	TSOP-5	28re	RF1	6b	Ons
RAB	-	NCP100SN	Vref-IC	Programable 0.9..6V±1.7%,	TSOP-5	28rf	RF2	6b	Ons
RAB	-	RP114N331B	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
RAC	-	LM4041CIM7-ADJ	Vref-IC	μPower, Precision, Shunt, Adj. 1.24..10V±0.5%	SC-70-5	28a2	RF2	6a	Nsc
RAC	-	RP114N341B	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
RAD	-	LM4041DIM7-ADJ	Vref-IC	μPower, Precision, Shunt, Adj. 1.24..10V±1%	SC-70-5	28a2	RF2	6a	Nsc
RAD	-	RP114N351B	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
RAE	-	RP114N361B	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
RAF	-	RP114N121B5	LVR-IC	LDO, 1.25V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
RAG	-	RP114N181B5	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
RAH	-	RP114N281B5	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
RAJ	-	RP114N341B5	LVR-IC	LDO, 3.45V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
Rb	-	BD53E44G-M	Vdet-IC	4.4V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RB	-	BD5341FVE	Vdet-IC	4.1V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RB	-	BD5341G	Vdet-IC	4.1V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RB5	eb	XC6368F151MR	DC-DC-IC	PWM/PFM step-up, 1.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RB6	eb	XC6368F161MR	DC-DC-IC	PWM/PFM step-up, 1.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RB7	eb	XC6368F171MR	DC-DC-IC	PWM/PFM step-up, 1.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RB8	eb	XC6368F181MR	DC-DC-IC	PWM/PFM step-up, 1.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RB9	eb	XC6368F191MR	DC-DC-IC	PWM/PFM step-up, 1.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RBA	-	RP114N321D	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
RBB	-	RP114N331D	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
RBC	-	RP114N341D	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
RBD	-	RP114N351D	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
RBE	-	RP114N361D	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
RBF	-	RP114N121D5	LVR-IC	LDO, 1.25V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
RBF	eb	XC6368F155MR	DC-DC-IC	PWM/PFM step-up, 1.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RBG	-	RP114N181D5	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
RBH	-	RP114N281D5	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
RBH	eb	XC6368F165MR	DC-DC-IC	PWM/PFM step-up, 1.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RBJ	-	RP114N341D5	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
RBK	eb	XC6368F175MR	DC-DC-IC	PWM/PFM step-up, 1.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RBL	eb	XC6368F185MR	DC-DC-IC	PWM/PFM step-up, 1.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RBM	eb	XC6368F195MR	DC-DC-IC	PWM/PFM step-up, 1.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
Rc	-	BD53E45G-M	Vdet-IC	4.5V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RC	-	BD5342FVE	Vdet-IC	4.2V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RC	-	BD5342G	Vdet-IC	4.2V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RC0	eb	XC6368F201MR	DC-DC-IC	PWM/PFM step-up, 2.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RC1	eb	XC6368F211MR	DC-DC-IC	PWM/PFM step-up, 2.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RC2	eb	XC6368F221MR	DC-DC-IC	PWM/PFM step-up, 2.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RC3	eb	XC6368F231MR	DC-DC-IC	PWM/PFM step-up, 2.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RC4	eb	XC6368F241MR	DC-DC-IC	PWM/PFM step-up, 2.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RC5	eb	XC6368F251MR	DC-DC-IC	PWM/PFM step-up, 2.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RC6	eb	XC6368F261MR	DC-DC-IC	PWM/PFM step-up, 2.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RC7	eb	XC6368F271MR	DC-DC-IC	PWM/PFM step-up, 2.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RC8	eb	XC6368F281MR	DC-DC-IC	PWM/PFM step-up, 2.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RC9	eb	XC6368F291MR	DC-DC-IC	PWM/PFM step-up, 2.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RCA	eb	XC6368F205MR	DC-DC-IC	PWM/PFM step-up, 2.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RCB	eb	XC6368F215MR	DC-DC-IC	PWM/PFM step-up, 2.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RCC	eb	XC6368F225MR	DC-DC-IC	PWM/PFM step-up, 2.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RCD	eb	XC6368F235MR	DC-DC-IC	PWM/PFM step-up, 2.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RCE	eb	XC6368F245MR	DC-DC-IC	PWM/PFM step-up, 2.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RCF	eb	XC6368F255MR	DC-DC-IC	PWM/PFM step-up, 2.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RCH	eb	XC6368F265MR	DC-DC-IC	PWM/PFM step-up, 2.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RCK	eb	XC6368F275MR	DC-DC-IC	PWM/PFM step-up, 2.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RCL	eb	XC6368F285MR	DC-DC-IC	PWM/PFM step-up, 2.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RCM	eb	XC6368F295MR	DC-DC-IC	PWM/PFM step-up, 2.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
Rd	-	BD53E46G-M	Vdet-IC	4.6V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RD	-	BD5343FVE	Vdet-IC	4.3V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RD	-	BD5343G	Vdet-IC	4.3V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RD0	eb	XC6368F301MR	DC-DC-IC	PWM/PFM step-up, 3.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RD1	eb	XC6368F311MR	DC-DC-IC	PWM/PFM step-up, 3.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RD2	eb	XC6368F321MR	DC-DC-IC	PWM/PFM step-up, 3.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RD3	eb	XC6368F331MR	DC-DC-IC	PWM/PFM step-up, 3.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RD4	eb	XC6368F341MR	DC-DC-IC	PWM/PFM step-up, 3.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RD5	eb	XC6368F351MR	DC-DC-IC	PWM/PFM step-up, 3.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RD6	eb	XC6368F361MR	DC-DC-IC	PWM/PFM step-up, 3.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RD7	eb	XC6368F371MR	DC-DC-IC	PWM/PFM step-up, 3.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RD8	eb	XC6368F381MR	DC-DC-IC	PWM/PFM step-up, 3.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RD9	eb	XC6368F391MR	DC-DC-IC	PWM/PFM step-up, 3.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RDA	eb	XC6368F305MR	DC-DC-IC	PWM/PFM step-up, 3.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RDB	eb	XC6368F315MR	DC-DC-IC	PWM/PFM step-up, 3.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RDC	eb	XC6368F325MR	DC-DC-IC	PWM/PFM step-up, 3.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RDD	eb	XC6368F335MR	DC-DC-IC	PWM/PFM step-up, 3.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RDE	eb	XC6368F345MR	DC-DC-IC	PWM/PFM step-up, 3.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RDF	eb	XC6368F355MR	DC-DC-IC	PWM/PFM step-up, 3.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RDH	eb	XC6368F365MR	DC-DC-IC	PWM/PFM step-up, 3.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RDK	eb	XC6368F375MR	DC-DC-IC	PWM/PFM step-up, 3.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RDL	eb	XC6368F385MR	DC-DC-IC	PWM/PFM step-up, 3.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RDM	eb	XC6368F395MR	DC-DC-IC	PWM/PFM step-up, 3.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
Re	-	BD53E47G-M	Vdet-IC	4.7V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RE	-	BD5344FVE	Vdet-IC	4.4V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RE	-	BD5344G	Vdet-IC	4.4V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RE0	eb	XC6368F401MR	DC-DC-IC	PWM/PFM step-up, 4.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RE1	eb	XC6368F411MR	DC-DC-IC	PWM/PFM step-up, 4.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RE2	eb	XC6368F421MR	DC-DC-IC	PWM/PFM step-up, 4.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RE3	eb	XC6368F431MR	DC-DC-IC	PWM/PFM step-up, 4.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RE4	eb	XC6368F441MR	DC-DC-IC	PWM/PFM step-up, 4.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RE5	eb	XC6368F451MR	DC-DC-IC	PWM/PFM step-up, 4.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RE6	eb	XC6368F461MR	DC-DC-IC	PWM/PFM step-up, 4.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RE7	eb	XC6368F471MR	DC-DC-IC	PWM/PFM step-up, 4.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RE8	eb	XC6368F481MR	DC-DC-IC	PWM/PFM step-up, 4.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RE9	eb	XC6368F491MR	DC-DC-IC	PWM/PFM step-up, 4.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
REA	eb	XC6368F405MR	DC-DC-IC	PWM/PFM step-up, 4.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
REB	eb	XC6368F415MR	DC-DC-IC	PWM/PFM step-up, 4.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
REC	eb	XC6368F425MR	DC-DC-IC	PWM/PFM step-up, 4.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RED	eb	XC6368F435MR	DC-DC-IC	PWM/PFM step-up, 4.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
REE	eb	XC6368F445MR	DC-DC-IC	PWM/PFM step-up, 4.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
REF	eb	XC6368F455MR	DC-DC-IC	PWM/PFM step-up, 4.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
REH	eb	XC6368F465MR	DC-DC-IC	PWM/PFM step-up, 4.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
REK	eb	XC6368F475MR	DC-DC-IC	PWM/PFM step-up, 4.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
REL	eb	XC6368F485MR	DC-DC-IC	PWM/PFM step-up, 4.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
REM	eb	XC6368F495MR	DC-DC-IC	PWM/PFM step-up, 4.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
Rf	-	BD53E48G-M	Vdet-IC	4.8V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RF	-	BD5345FVE	Vdet-IC	4.5V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RF	-	BD5345G	Vdet-IC	4.5V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RF0	eb	XC6368F501MR	DC-DC-IC	PWM/PFM step-up, 5.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RF1	eb	XC6368F511MR	DC-DC-IC	PWM/PFM step-up, 5.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RF2	eb	XC6368F521MR	DC-DC-IC	PWM/PFM step-up, 5.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RF3	eb	XC6368F531MR	DC-DC-IC	PWM/PFM step-up, 5.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RF4	eb	XC6368F541MR	DC-DC-IC	PWM/PFM step-up, 5.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RF5	eb	XC6368F551MR	DC-DC-IC	PWM/PFM step-up, 5.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RF6	eb	XC6368F561MR	DC-DC-IC	PWM/PFM step-up, 5.6V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RF7	eb	XC6368F571MR	DC-DC-IC	PWM/PFM step-up, 5.7V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RF8	eb	XC6368F581MR	DC-DC-IC	PWM/PFM step-up, 5.8V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RF9	eb	XC6368F591MR	DC-DC-IC	PWM/PFM step-up, 5.9V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RFA	eb	XC6368F505MR	DC-DC-IC	PWM/PFM step-up, 5.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RFB	eb	XC6368F515MR	DC-DC-IC	PWM/PFM step-up, 5.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RFC	eb	XC6368F525MR	DC-DC-IC	PWM/PFM step-up, 5.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RFD	eb	XC6368F535MR	DC-DC-IC	PWM/PFM step-up, 5.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RFE	eb	XC6368F545MR	DC-DC-IC	PWM/PFM step-up, 5.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RFF	eb	XC6368F555MR	DC-DC-IC	PWM/PFM step-up, 5.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RFH	eb	XC6368F565MR	DC-DC-IC	PWM/PFM step-up, 5.6V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RFK	eb	XC6368F575MR	DC-DC-IC	PWM/PFM step-up, 5.7V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RFL	eb	XC6368F585MR	DC-DC-IC	PWM/PFM step-up, 5.8V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RFM	eb	XC6368F595MR	DC-DC-IC	PWM/PFM step-up, 5.9V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
Rg	-	BD53E49G-M	Vdet-IC	4.9V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RG	-	BD5346FVE	Vdet-IC	4.6V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RG	-	BD5346G	Vdet-IC	4.6V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
Rh	-	BD53E50G-M	Vdet-IC	5.0V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RH	-	BD5347FVE	Vdet-IC	4.7V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RH	-	BD5347G	Vdet-IC	4.7V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RH0	eb	XC6368F601MR	DC-DC-IC	PWM/PFM step-up, 6.0V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RH1	eb	XC6368F611MR	DC-DC-IC	PWM/PFM step-up, 6.1V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RH2	eb	XC6368F621MR	DC-DC-IC	PWM/PFM step-up, 6.2V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RH3	eb	XC6368F631MR	DC-DC-IC	PWM/PFM step-up, 6.3V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RH4	eb	XC6368F641MR	DC-DC-IC	PWM/PFM step-up, 6.4V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RH5	eb	XC6368F651MR	DC-DC-IC	PWM/PFM step-up, 6.5V±2.5%, 200mA, 100kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RHA	eb	XC6368F605MR	DC-DC-IC	PWM/PFM step-up, 6.0V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RHB	eb	XC6368F615MR	DC-DC-IC	PWM/PFM step-up, 6.1V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RHC	eb	XC6368F625MR	DC-DC-IC	PWM/PFM step-up, 6.2V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RHD	eb	XC6368F635MR	DC-DC-IC	PWM/PFM step-up, 6.3V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RHE	eb	XC6368F645MR	DC-DC-IC	PWM/PFM step-up, 6.4V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RHF	eb	XC6368F655MR	DC-DC-IC	PWM/PFM step-up, 6.5V±2.5%, 200mA, 500kHz, +CE, soft start	SOT-25	28sd	DC10	6g	Tor
RJ	-	BD5348FVE	Vdet-IC	4.8V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RJ	-	BD5348G	Vdet-IC	4.8V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RJB	-	LM4040BIM7-2.0	Vref-IC	µPower, Precision, Shunt, 2.048V±0.2%	SC-70-5	28dq	RF1	6a	Nsc
RJC	-	LM4040CIM7-2.0	Vref-IC	µPower, Precision, Shunt, 2.048V±0.5%	SC-70-5	28dq	RF1	6a	Nsc
RJD	-	LM4040DIM7-2.0	Vref-IC	µPower, Precision, Shunt, 2.048V±1%	SC-70-5	28dq	RF1	6a	Nsc
RJE	-	LM4040EIM7-2.0	Vref-IC	µPower, Precision, Shunt, 2.048V±2%	SC-70-5	28dq	RF1	6a	Nsc
Rk	-	BD53E51G-M	Vdet-IC	5.1V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RK	-	BD5349FVE	Vdet-IC	4.9V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RK	-	BD5349G	Vdet-IC	4.9V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RKB	-	LM4040BIM7-3.0	Vref-IC	µPower, Precision, Shunt, 3.00V±0.2%	SC-70-5	28dq	RF1	6a	Nsc
RKC	-	LM4040CIM7-3.0	Vref-IC	µPower, Precision, Shunt, 3.00V±0.5%	SC-70-5	28dq	RF1	6a	Nsc
RKD	-	LM4040DIM7-3.0	Vref-IC	µPower, Precision, Shunt, 3.00V±1%	SC-70-5	28dq	RF1	6a	Nsc
RKE	-	LM4040EIM7-3.0	Vref-IC	µPower, Precision, Shunt, 3.00V±2%	SC-70-5	28dq	RF1	6a	Nsc
RL	-	BD5350FVE	Vdet-IC	5.0V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RL	-	BD5350G	Vdet-IC	5.0V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RL	-	R1122N201B	LVR-IC	LDO, Low noise, 2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
Rm	-	BD53E52G-M	Vdet-IC	5.2V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RM	-	BD5351FVE	Vdet-IC	5.1V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RM	-	BD5351G	Vdet-IC	5.1V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RM	-	R1122N211B	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
Rn	-	BD53E53G-M	Vdet-IC	5.3V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RN	-	BD5352FVE	Vdet-IC	5.2V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RN	-	BD5352G	Vdet-IC	5.2V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RN	-	R1122N221B	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
Rp	-	BD53E54G-M	Vdet-IC	5.4V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RP	-	BD5353FVE	Vdet-IC	5.3V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RP	-	BD5353G	Vdet-IC	5.3V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RP	-	R1122N231B	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
RQ	-	BD5354FVE	Vdet-IC	5.4V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RQ	-	BD5354G	Vdet-IC	5.4V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RQ	-	R1122N241B	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
Rr	-	BD53E55G-M	Vdet-IC	5.5V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RR	-	BD5355FVE	Vdet-IC	5.5V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RR	-	BD5355G	Vdet-IC	5.5V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RR	-	R1122N251B	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
RS	-	BD5356FVE	Vdet-IC	5.6V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RS	-	BD5356G	Vdet-IC	5.6V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RS	-	R1122N261B	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
RT	-	BD5357FVE	Vdet-IC	5.7V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RT	-	BD5357G	Vdet-IC	5.7V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RT	-	R1122N271B	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
RU	-	BD5358FVE	Vdet-IC	5.8V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RU	-	BD5358G	Vdet-IC	5.8V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RU	-	R1122N281B	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
RUM	-	NCP300LSN25T1	Vdet-IC	2.5V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
RV	-	BD5359FVE	Vdet-IC	5.9V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RV	-	BD5359G	Vdet-IC	5.9V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RV	-	R1122N291B	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
RW	-	BD5360FVE	Vdet-IC	6.0V±1%, -Reset PPO	VSOF-5	30ua	VD3	6e	Rhm
RW	-	BD5360G	Vdet-IC	6.0V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
Ry	-	BD53E56G-M	Vdet-IC	5.6V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
RZ5A	-	S-8211CAS-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZA	-	S-8211CAA-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZB	-	S-8211CAB-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.325V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZD	-	S-8211CAD-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.350V, Tcy=143ms	SOT-23-5	28bm2	VBM1	6g	Sii
RZE	-	S-8211CAE-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZF	-	S-8211CAF-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZH	-	S-8211CAH-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZI	-	S-8211CAI-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZJ	-	S-8211CAJ-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZK	-	S-8211CAK-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZL	-	S-8211CAL-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZM	-	S-8211CAM-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZN	-	S-8211CAN-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.20V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZO	-	S-8211CAO-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZP	-	S-8211CAP-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZQ	-	S-8211CAQ-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZR	-	S-8211CAR-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZT	-	S-8211CAT-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZU	-	S-8211CAU-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZV	-	S-8211CAV-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.325V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZY	-	S-8211CAY-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SOT-23-5	28bm2	VBM1	6g	Sii
RZZ	-	S-8211CAZ-M5T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=	SOT-23-5	28bm2	VBM1	6g	Sii
S0	-	R1121N301B	LVR-IC	LDO, Low noise, 3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
S00	-	NC7S00P5	CMOS-Log	2-input NAND gate	SC-70-5	28	Log1	6a	F
S00	-	RP202N281B5	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S001	-	RP201Q282B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S008	-	RP201Q082B	LVR-IC	LDO, 0.8V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S009	-	RP201Q092B	LVR-IC	LDO, 0.9V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S01	-	RP202N121B5	LVR-IC	LDO, 1.25V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S010	-	RP201Q102B	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S011	-	RP201Q112B	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S012	-	RP201Q122B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S013	-	RP201Q132B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S014	-	RP201Q142B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S015	-	RP201Q152B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S016	-	RP201Q162B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S017	-	RP201Q172B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S018	-	RP201Q182B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S019	-	RP201Q192B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S02	-	NC7S02P5	CMOS-Log	2-input NOR gate	SC-70-5	28	Log2	6a	F
S02	-	RP202N291B5	LVR-IC	LDO, 2.95V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S020	-	RP201Q202B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S021	-	RP201Q212B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S022	-	RP201Q222B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S023	-	RP201Q232B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S024	-	RP201Q242B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S025	-	RP201Q252B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S026	-	RP201Q262B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S027	-	RP201Q272B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S028	-	RP201Q282B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S029	-	RP201Q292B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S03	-	TC53N6002ECT	Vdet-IC	6.0V±2%, -Reset ODO	SOT-23-5	28vd1	VD6	6g	Mcc
S030	-	RP201Q302B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S031	-	RP201Q312B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S032	-	RP201Q322B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S033	-	RP201Q332B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S034	-	RP201Q342B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S035	-	RP201Q352B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S036	-	RP201Q362B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S037	-	RP201Q372B	LVR-IC	LDO, 3.7V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S038	-	RP201Q382B	LVR-IC	LDO, 3.8V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S039	-	RP201Q392B	LVR-IC	LDO, 3.9V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S04	-	NC7S04P5	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	F
S040	-	RP201Q402B	LVR-IC	LDO, 4.0V±1%, 150mA, +CE, ECO	SC-88A	28xx	VR10	6ma	Ric
S08	-	NC7S08P5	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6a	F
S08	-	RP202N081B	LVR-IC	LDO, 0.8V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S09	-	RP202N091B	LVR-IC	LDO, 0.9V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S0A	-	R3134N10EA	Vdet-IC	1.0V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0A	-	XC6118C50AMR-G	Vdet-IC	5.0V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD15	6g	Tor
S0B	-	R3134N11EA	Vdet-IC	1.1V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0B	-	XC6118C50BMR-G	Vdet-IC	5.0V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD15	6g	Tor
S0C	-	R3134N12EA	Vdet-IC	1.2V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0C	-	XC6118C50CMR-G	Vdet-IC	5.0V±2%, ±Reset PPO, Sense, hysteresis 5%	SOT-25	28mf	VD12	6g	Tor
S0D	-	R3134N13EA	Vdet-IC	1.3V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0D	-	XC6118C50DMR-G	Vdet-IC	5.0V±2%, ±Reset PPO, Sense, hysteresis <1%	SOT-25	28mf	VD12	6g	Tor
S0E	-	R3134N14EA	Vdet-IC	1.4V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0F	-	R3134N15EA	Vdet-IC	1.5V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0G	-	R3134N16EA	Vdet-IC	1.6V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0H	-	R3134N17EA	Vdet-IC	1.7V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0J	-	R3134N18EA	Vdet-IC	1.8V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0K	-	R3134N19EA	Vdet-IC	1.9V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0L	-	R3134N20EA	Vdet-IC	2.0V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0M	-	R3134N21EA	Vdet-IC	2.1V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0N	-	R3134N22EA	Vdet-IC	2.2V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0P	-	R3134N23EA	Vdet-IC	2.3V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0R	-	R3134N24EA	Vdet-IC	2.4V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0S	-	R3134N25EA	Vdet-IC	2.5V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0T	-	R3134N26EA	Vdet-IC	2.6V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0U	-	R3134N27EA	Vdet-IC	2.7V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0V	-	R3134N28EA	Vdet-IC	2.8V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0W	-	R3134N29EA	Vdet-IC	2.9V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0X	-	R3134N30EA	Vdet-IC	3.0V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0Y	-	R3134N31EA	Vdet-IC	3.1V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S0Z	-	R3134N32EA	Vdet-IC	3.2V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
S1	-	R1121N311B	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
S10	-	RP202N101B	LVR-IC	LDO, 1.0V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S11	-	RP202N111B	LVR-IC	LDO, 1.1V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S12	-	RP202N121B	LVR-IC	LDO, 1.2V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S13	-	RP202N131B	LVR-IC	LDO, 1.3V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S14	-	NC7S14P5	CMOS-Log	Inverting Schmitt-trigger	SC-70-5	28	Log7	6a	F
S14	-	RP202N141B	LVR-IC	LDO, 1.4V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S15	-	R1162N151B	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S15	-	RP202N151B	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S16	-	R1162N161B	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S16	-	RP202N161B	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S17	-	R1162N171B	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S17	-	RP202N171B	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S18	-	R1162N181B	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S18	-	RP202N181B	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S19	-	R1162N191B	LVR-IC	LDO, 1.9V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S19	-	RP202N191B	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S1A	-	R3134N10EC	Vdet-IC	1.0V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1B	-	R3134N11EC	Vdet-IC	1.1V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1C	-	R3134N12EC	Vdet-IC	1.2V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1D	-	R3134N13EC	Vdet-IC	1.3V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1E	-	R3134N14EC	Vdet-IC	1.4V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1F	-	R3134N15EC	Vdet-IC	1.5V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1G	-	R3134N16EC	Vdet-IC	1.6V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1H	-	R3134N17EC	Vdet-IC	1.7V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1J	-	R3134N18EC	Vdet-IC	1.8V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1K	-	R3134N19EC	Vdet-IC	1.9V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1L	-	R3134N20EC	Vdet-IC	2.0V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1M	-	R3134N21EC	Vdet-IC	2.1V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S1N	-	R3134N22EC	Vdet-IC	2.2V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1P	-	R3134N23EC	Vdet-IC	2.3V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1R	-	R3134N24EC	Vdet-IC	2.4V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1S	-	R3134N25EC	Vdet-IC	2.5V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1T	-	R3134N26EC	Vdet-IC	2.6V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1U	-	R3134N27EC	Vdet-IC	2.7V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1V	-	R3134N28EC	Vdet-IC	2.8V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1W	-	R3134N29EC	Vdet-IC	2.9V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1X	-	R3134N30EC	Vdet-IC	3.0V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1Y	-	R3134N31EC	Vdet-IC	3.1V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S1Z	-	R3134N32EC	Vdet-IC	3.2V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
S2	-	R1121N321B	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
S20	-	R1162N201B	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S20	-	RP202N201B	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S21	-	R1162N211B	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S21	-	RP202N211B	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S22	-	R1162N221B	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S22	-	RP202N221B	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S23	-	R1162N231B	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S23	-	RP202N231B	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S24	-	R1162N241B	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S24	-	RP202N241B	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S25	-	R1162N251B	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S25	-	RP202N251B	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S26	-	R1162N261B	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S26	-	RP202N261B	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S27	-	R1162N271B	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S27	-	RP202N271B	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S28	-	R1162N281B	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S28	-	RP202N281B	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S29	-	R1162N291B	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S29	-	RP202N291B	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S3	-	FMS3	Si-pnp	Dual, GP, 120V, 50mA, 140MHz	SOT-23-5	28	T12	6a	Rhm
S3	-	R1121N331B	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
S30	-	R1162N301B	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S30	-	RP202N301B	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S31	-	R1162N311B	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S31	-	RP202N311B	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S32	-	NC7S32P5	CMOS-Log	2-input OR gate	SC-70-5	28	Log4	6a	F
S32	-	R1162N321B	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S32	-	RP202N321B	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S33	-	R1162N331B	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S33	-	RP202N331B	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S34	-	R1162N341B	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S34	-	RP202N341B	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S35	-	R1162N351B	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S35	-	RP202N351B	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S36	-	R1162N361B	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S36	-	RP202N361B	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S37	-	R1162N371B	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S37	-	RP202N371B	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S38	-	R1162N381B	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S38	-	RP202N381B	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S39	-	R1162N391B	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S39	-	RP202N391B	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S4	-	FMS4	Si-pnp	Dual, GP, 120V, 50mA, 140MHz	SOT-23-5	28ty	T25	6a	Rhm
S4	-	KTA501E-Y	Si-pnp	Dual GP, 50V, 150mA, 100mW, B=120..240, 80MHz	TESV	30/T12	T12	6l	Kec
S4	-	KTA501U-Y	Si-pnp	Dual GP, 50V, 150mA, 100mW, B=120..240, 80MHz	USV	28	T12	6l	Kec
S4	-	R1121N341B	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
S40	-	R1162N401B	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S40	-	RP202N401B	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
S41	-	R1162N181B5	LVR-IC	LDO, 1.85V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S42	-	R1162N281B5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
S5	-	R1121N351B	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
S6	-	KTA501E-GR	Si-pnp	Dual GP, 50V, 150mA, 100mW, B=200..400, 80MHz	TESV	30/T12	T12	6l	Kec
S6	-	KTA501U-GR	Si-pnp	Dual GP, 50V, 150mA, 100mW, B=200..400, 80MHz	USV	28	T12	6l	Kec
S6	-	R1121N361B	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
S7	-	R1121N371B	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
S8	-	R1121N381B	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
S86	-	NC7S86P5	CMOS-Log	2-input EXCLUSIVE-OR gate	SC-70-5	28	Log5	6a	F



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S9	-	R1121N391B	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
SAA	-	R3118N061A	Vdet-IC	0.6V±22.5mV, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAB	-	R3118N071A	Vdet-IC	0.7V±22.5mV, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAC	-	NCP302LSN47T1	Vdet-IC	4.7V±1.5%, -Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SAC	-	R3118N081A	Vdet-IC	0.8V±22.5mV, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAD	-	R3118N091A	Vdet-IC	0.9V±22.5mV, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAE	-	R3118N101A	Vdet-IC	1.0V±22.5mV, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAF	-	NCP302LSN43T1	Vdet-IC	4.3V±1.5%, -Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SAF	-	R3118N111A	Vdet-IC	1.1V±22.5mV, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAG	-	R3118N121A	Vdet-IC	1.2V±22.5mV, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAH	-	R3118N131A	Vdet-IC	1.3V±22.5mV, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAI	-	NCP302LSN40T1	Vdet-IC	4.0V±1.5%, -Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SAJ	-	R3118N141A	Vdet-IC	1.4V±22.5mV, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAK	-	NCP302LSN38T1	Vdet-IC	3.8V±1.5%, -Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SAK	-	R3118N151A	Vdet-IC	1.5V±22.5mV, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAL	-	NCP302LSN45T1	Vdet-IC	4.5V±1.5%, -Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SAL	-	R3118N161A	Vdet-IC	1.6V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAM	-	R3118N171A	Vdet-IC	1.7V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAN	-	R3118N181A	Vdet-IC	1.8V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAP	-	R3118N191A	Vdet-IC	1.9V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAQ	-	NCP302LSN33T1	Vdet-IC	3.3V±1.5%, -Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SAQ	-	R3118N201A	Vdet-IC	2.0V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAR	-	R3118N211A	Vdet-IC	2.1V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAS	-	R3118N221A	Vdet-IC	2.2V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAT	-	NCP302LSN30T1	Vdet-IC	3.0V±1.5%, -Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SAT	-	R3118N231A	Vdet-IC	2.3V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAU	-	R3118N241A	Vdet-IC	2.4V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAV	-	R3118N251A	Vdet-IC	2.5V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAW	-	NCP302LSN27T1	Vdet-IC	2.7V±1.5%, -Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SAW	-	R3118N261A	Vdet-IC	2.6V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAX	-	R3118N271A	Vdet-IC	2.7V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAY	-	R3118N281A	Vdet-IC	2.8V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SAZ	-	R3118N291A	Vdet-IC	2.9V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
SBA	-	R3118N061C	Vdet-IC	0.6V±22.5mV, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBB	-	R3118N071C	Vdet-IC	0.7V±22.5mV, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBC	-	R3118N081C	Vdet-IC	0.8V±22.5mV, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBD	-	NCP302LSN20T1	Vdet-IC	2.0V±1.5%, -Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SBD	-	R3118N091C	Vdet-IC	0.9V±22.5mV, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBE	-	R3118N101C	Vdet-IC	1.0V±22.5mV, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBF	-	NCP302LSN18T1	Vdet-IC	1.8V±1.5%, -Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SBF	-	R3118N111C	Vdet-IC	1.1V±22.5mV, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBG	-	R3118N121C	Vdet-IC	1.2V±22.5mV, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBH	-	R3118N131C	Vdet-IC	1.3V±22.5mV, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBI	-	NCP302LSN15T1	Vdet-IC	1.5V±1.5%, -Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SBJ	-	R3118N141C	Vdet-IC	1.4V±22.5mV, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBK	-	R3118N151C	Vdet-IC	1.5V±22.5mV, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBL	-	R3118N161C	Vdet-IC	1.6V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBM	-	R3118N171C	Vdet-IC	1.7V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBN	-	R3118N181C	Vdet-IC	1.8V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBO	-	NCP302LSN09T1	Vdet-IC	0.9V±1.5%, -Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SBP	-	NCP303LSN49T1	Vdet-IC	4.9V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SBP	-	R3118N191C	Vdet-IC	1.9V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBQ	-	R3118N201C	Vdet-IC	2.0V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBR	-	NCP303LSN47T1	Vdet-IC	4.7V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SBR	-	R3118N211C	Vdet-IC	2.1V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBS	-	NCP303LSN46T1	Vdet-IC	4.6V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SBS	-	R3118N221C	Vdet-IC	2.2V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBT	-	NCP303LSN45T1	Vdet-IC	4.5V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SBT	-	R3118N231C	Vdet-IC	2.3V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBU	-	NCP303LSN44T1	Vdet-IC	4.4V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SBU	-	R3118N241C	Vdet-IC	2.4V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBV	-	NCV303LSN43T1	Vdet-IC	4.3V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SBV	-	R3118N251C	Vdet-IC	2.5V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBW	-	NCP303LSN42T1	Vdet-IC	4.2V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SBW	-	R3118N261C	Vdet-IC	2.6V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBX	-	R3118N271C	Vdet-IC	2.7V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBY	-	NCP303LSN40T1	Vdet-IC	4.0V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SBY	-	R3118N281C	Vdet-IC	2.8V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SBZ	-	R3118N291C	Vdet-IC	2.9V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
SC	-	TC75S51F	Op-IC	CMOS, Vcc=±0.75..±3.5V, Icc0=120µA	SMV	28opf	OP1	6a	Tos



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SC	-	TC75S51FE	Op-IC	CMOS, Vcc=±0.75..±3.5V, Icc0=120µA	ESV	30opf	OP1	6a	Tos
SC	-	TC75S51FU	Op-IC	CMOS, Vcc=±0.75..±3.5V, Icc0=120µA	USV	28opf	OP1	6a	Tos
SCA	-	NCP303LSN38T1	Vdet-IC	3.8V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCD	-	NCP303LSN36T1	Vdet-IC	3.6V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCDB	-	LP3990MFX-1.2	LVR-IC	1.2V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Nsc
SCEB	-	LP3990MFX-1.5	LVR-IC	1.5V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Nsc
SCF	-	NCP303LSN34T1	Vdet-IC	3.4V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCFB	-	LP3990MFX-1.8	LVR-IC	1.8V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Nsc
SCG	-	NCP303LSN33T1	Vdet-IC	3.3V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCH	-	NCP303LSN32T1	Vdet-IC	3.2V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCI	-	NCP303LSN31T1	Vdet-IC	3.1V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCJ	-	NCP303LSN30T1	Vdet-IC	3.0V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCJB	-	LP3990MFX-2.5	LVR-IC	2.5V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Nsc
SCK	-	NCP303LSN29T1	Vdet-IC	2.9V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCKB	-	LP3990MFX-2.8	LVR-IC	2.8V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Nsc
SCL	-	NCP303LSN28T1	Vdet-IC	2.8V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCLB	-	LP3990MFX-3.3	LVR-IC	3.3V±1.5%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Nsc
SCM	-	NCP303LSN27T1	Vdet-IC	2.7V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCN	-	NCP303LSN26T1	Vdet-IC	2.6V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCO	-	NCP303LSN25T1	Vdet-IC	2.5V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCP	-	NCP303LSN24T1	Vdet-IC	2.4V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCQ	-	NCP303LSN23T1	Vdet-IC	2.3V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCR	-	NCP303LSN22T1	Vdet-IC	2.2V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCT	-	NCP303LSN20T1	Vdet-IC	2.0V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCV	-	NCP303LSN18T1	Vdet-IC	1.8V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCW	-	NCP303LSN17T1	Vdet-IC	1.7V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCX	-	NCP303LSN16T1	Vdet-IC	1.6V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCY	-	NCP303LSN15T1	Vdet-IC	1.5V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SCZ	-	NCP303LSN14T1	Vdet-IC	1.4V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SDA	-	NCP303LSN13T1	Vdet-IC	1.3V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SDB	-	NCV303LSN12T1	Vdet-IC	1.2V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SDC	-	NCP303LSN11T1	Vdet-IC	1.1V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SDD	-	NCP303LSN10T1	Vdet-IC	1.0V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SDE	-	NCP303LSN09T1	Vdet-IC	0.9V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SDG	-	NCP302HSN45T1	Vdet-IC	4.5V±1.5%, +Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SDI	-	NCP302HSN30T1	Vdet-IC	3.0V±1.5%, +Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SDK	-	NCP302HSN27T1	Vdet-IC	2.7V±1.5%, +Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SDO	-	NCP302HSN09T1	Vdet-IC	0.9V±1.5%, +Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SDP	-	NCP300HSN47T1	Vdet-IC	4.7V±1.5%, +Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SDQ	-	NCP300HSN45T1	Vdet-IC	4.5V±1.5%, +Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SDS	-	NCP300HSN30T1	Vdet-IC	3.0V±1.5%, +Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SDU	-	NCP300HSN27T1	Vdet-IC	2.7V±1.5%, +Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SDY	-	NCP300HSN09T1	Vdet-IC	0.9V±1.5%, +Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SDZ	-	NCP300LSN47T1	Vdet-IC	4.7V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SE	-	TC75S54F	Op-IC	CMOS, Vcc=±0.9..±3.5V, Icc0=200µA	SMV	28opf	OP1	6a	Tos
SE	-	TC75S54FE	Op-IC	CMOS, Vcc=±0.9..±3.5V, Icc0=200µA	ESV	30opf	OP1	6a	Tos
SE	-	TC75S54FU	Op-IC	CMOS, Vcc=±0.9..±3.5V, Icc0=200µA	USV	28opf	OP1	6a	Tos
SE2	-	S-1135A34-M5T1S	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SE3	-	S-1135A35-M5T1S	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEA	-	NCP300LSN45T1	Vdet-IC	4.5V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SEA	-	S-1135A10-M5T1S	LVR-IC	LDO, 1.0V±15mV, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEB	-	S-1135A11-M5T1S	LVR-IC	LDO, 1.1V±15mV, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEC	-	NCP300LSN30T1	Vdet-IC	3.0V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SEC	-	S-1135A12-M5T1S	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SED	-	NCP300LSN28T1	Vdet-IC	2.8V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SED	-	S-1135A13-M5T1S	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEE	-	NCP300LSN27T1	Vdet-IC	2.7V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SEE	-	S-1135A14-M5T1S	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEF	-	S-1135A15-M5T1S	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEG	-	S-1135A16-M5T1S	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEH	-	S-1135A17-M5T1S	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEI	-	S-1135A18-M5T1S	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEJ	-	NCP300LSN09T1	Vdet-IC	0.9V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SEJ	-	S-1135A1J-M5T1S	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEK	-	S-1135A19-M5T1S	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEL	-	NCP301HSN45T1	Vdet-IC	4.5V±1.5%, +Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SEL	-	S-1135A20-M5T1S	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEM	-	S-1135A21-M5T1S	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEN	-	NCP301HSN30T1	Vdet-IC	3.0V±1.5%, +Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SEN	-	S-1135A22-M5T1S	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SEO	-	S-1135A23-M5T1S	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEP	-	NCP301HSN27T1	Vdet-IC	2.7V±1.5%, +Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SEP	-	S-1135A24-M5T1S	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEQ	-	S-1135A25-M5T1S	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SER	-	S-1135A26-M5T1S	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SES	-	S-1135A27-M5T1S	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SET	-	NCP301HSN09T1	Vdet-IC	0.9V±1.5%, +Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SET	-	S-1135A28-M5T1S	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEU	-	NCP301LSN47T1	Vdet-IC	4.7V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SEU	-	S-1135A2J-M5T1S	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEV	-	NCP301LSN45T1	Vdet-IC	4.5V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SEV	-	S-1135A29-M5T1S	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEW	-	NCP301LSN31T1	Vdet-IC	3.1V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SEW	-	S-1135A30-M5T1S	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEX	-	S-1135A31-M5T1S	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEY	-	NCP301LSN30T1	Vdet-IC	3.0V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SEY	-	S-1135A32-M5T1S	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
SEZ	-	NCP301LSN28T1	Vdet-IC	2.8V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SEZ	-	S-1135A33-M5T1S	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
sf	-	PT7M7811JTA	Vdet-IC	4.0V±1.5%, -Reset PPO, -MR	SOT-23-5	28vd2	VD5	6k	Pti
sf	ev	PT7M7811JTAE	Vdet-IC	4.0V±1.5%, -Reset PPO, -MR, Lead free	SOT-23-5	28vd2	VD5	6k	Pti
SF	-	TC75S55F	Op-IC	CMOS, Vcc=±0.9..±3.5V, Icc0=20µA	SMV	28opf	OP1	6a	Tos
SF	-	TC75S55FE	Op-IC	CMOS, Vcc=±0.9..±3.5V, Icc0=20µA	ESV	30opf	OP1	6a	Tos
SF	-	TC75S55FU	Op-IC	CMOS, Vcc=±0.9..±3.5V, Icc0=20µA	USV	28opf	OP1	6a	Tos
SFA	-	NCP301LSN27T1	Vdet-IC	2.7V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SFD	-	NCP301LSN20T1	Vdet-IC	2.0V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SFF	-	NCP301LSN09T1	Vdet-IC	0.9V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SFH	-	NCP302HSN18T1	Vdet-IC	1.8V±1.5%, +Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SFJ	-	NCP300HSN18T1	Vdet-IC	1.8V±1.5%, +Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SFK	-	NCP300LSN18T1	Vdet-IC	1.8V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SFM	-	NCP301HSN18T1	Vdet-IC	1.8V±1.5%, +Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SFN	-	NCP301LSN18T1	Vdet-IC	1.8V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
sg	-	PT7M7812JTA	Vdet-IC	4.0V±1.5%, +Reset PPO, -MR	SOT-23-5	28vd2	VD5	6k	Pti
sg	ev	PT7M7812JTAE	Vdet-IC	4.0V±1.5%, +Reset PPO, -MR, Lead free	SOT-23-5	28vd2	VD5	6k	Pti
SG	-	2SA1618-GR	Si-pnp	Dual, 50V, 150mA, 300mW, B=200..400, >80MHz	SOT-25	28	T12	6a	Tos
SG	-	2SA1873-GR	Si-pnp	Dual, AF-Amp, 50V, 150mA, 200mW, B=200..400	SOT-25	28	T12	6a	Tos
SG15G	-	LR1101G-15-AF5	LVR-IC	LDO, 1.5V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG15L	-	LR1101L-15-AF5	LVR-IC	LDO, 1.5V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG16G	-	LR1101G-16-AF5	LVR-IC	LDO, 1.6V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG16L	-	LR1101L-16-AF5	LVR-IC	LDO, 1.6V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG17G	-	LR1101G-17-AF5	LVR-IC	LDO, 1.7V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG17L	-	LR1101L-17-AF5	LVR-IC	LDO, 1.7V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG18G	-	LR1101G-18-AF5	LVR-IC	LDO, 1.8V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG18L	-	LR1101L-18-AF5	LVR-IC	LDO, 1.8V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG19G	-	LR1101G-19-AF5	LVR-IC	LDO, 1.9V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG19L	-	LR1101L-19-AF5	LVR-IC	LDO, 1.9V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG2	-	S-1135B34-M5T1S	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SG20G	-	LR1101G-20-AF5	LVR-IC	LDO, 2.0V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG20L	-	LR1101L-20-AF5	LVR-IC	LDO, 2.0V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG21G	-	LR1101G-21-AF5	LVR-IC	LDO, 2.1V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG21L	-	LR1101L-21-AF5	LVR-IC	LDO, 2.1V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG22G	-	LR1101G-22-AF5	LVR-IC	LDO, 2.2V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG22L	-	LR1101L-22-AF5	LVR-IC	LDO, 2.2V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG23G	-	LR1101G-23-AF5	LVR-IC	LDO, 2.3V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG23L	-	LR1101L-23-AF5	LVR-IC	LDO, 2.3V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG24G	-	LR1101G-24-AF5	LVR-IC	LDO, 2.4V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG24L	-	LR1101L-24-AF5	LVR-IC	LDO, 2.4V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG25G	-	LR1101G-25-AF5	LVR-IC	LDO, 2.5V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG25L	-	LR1101L-25-AF5	LVR-IC	LDO, 2.5V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG26G	-	LR1101G-26-AF5	LVR-IC	LDO, 2.6V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG26L	-	LR1101L-26-AF5	LVR-IC	LDO, 2.6V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG27G	-	LR1101G-27-AF5	LVR-IC	LDO, 2.7V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG27L	-	LR1101L-27-AF5	LVR-IC	LDO, 2.7V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG28G	-	LR1101G-28-AF5	LVR-IC	LDO, 2.8V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG28L	-	LR1101L-28-AF5	LVR-IC	LDO, 2.8V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG29G	-	LR1101G-29-AF5	LVR-IC	LDO, 2.9V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG29L	-	LR1101L-29-AF5	LVR-IC	LDO, 2.9V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG3	-	S-1135B35-M5T1S	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SG30G	-	LR1101G-30-AF5	LVR-IC	LDO, 3.0V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG30L	-	LR1101L-30-AF5	LVR-IC	LDO, 3.0V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SG31G	-	LR1101G-31-AF5	LVR-IC	LDO, 3.1V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG31L	-	LR1101L-31-AF5	LVR-IC	LDO, 3.1V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG32G	-	LR1101G-32-AF5	LVR-IC	LDO, 3.2V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG32L	-	LR1101L-32-AF5	LVR-IC	LDO, 3.2V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG33G	-	LR1101G-33-AF5	LVR-IC	LDO, 3.3V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG33L	-	LR1101L-33-AF5	LVR-IC	LDO, 3.3V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG34G	-	LR1101G-34-AF5	LVR-IC	LDO, 3.4V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG34L	-	LR1101L-34-AF5	LVR-IC	LDO, 3.4V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG35G	-	LR1101G-35-AF5	LVR-IC	LDO, 3.5V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG35L	-	LR1101L-35-AF5	LVR-IC	LDO, 3.5V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG36G	-	LR1101G-36-AF5	LVR-IC	LDO, 3.6V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG36L	-	LR1101L-36-AF5	LVR-IC	LDO, 3.6V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG37G	-	LR1101G-37-AF5	LVR-IC	LDO, 3.7V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG37L	-	LR1101L-37-AF5	LVR-IC	LDO, 3.7V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG38G	-	LR1101G-38-AF5	LVR-IC	LDO, 3.8V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG38L	-	LR1101L-38-AF5	LVR-IC	LDO, 3.8V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG39G	-	LR1101G-39-AF5	LVR-IC	LDO, 3.9V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG39L	-	LR1101L-39-AF5	LVR-IC	LDO, 3.9V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG40G	-	LR1101G-40-AF5	LVR-IC	LDO, 4.0V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG40L	-	LR1101L-40-AF5	LVR-IC	LDO, 4.0V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG41G	-	LR1101G-41-AF5	LVR-IC	LDO, 4.1V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG41L	-	LR1101L-41-AF5	LVR-IC	LDO, 4.1V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG42G	-	LR1101G-42-AF5	LVR-IC	LDO, 4.2V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG42L	-	LR1101L-42-AF5	LVR-IC	LDO, 4.2V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG43G	-	LR1101G-43-AF5	LVR-IC	LDO, 4.3V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG43L	-	LR1101L-43-AF5	LVR-IC	LDO, 4.3V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG44G	-	LR1101G-44-AF5	LVR-IC	LDO, 4.4V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG44L	-	LR1101L-44-AF5	LVR-IC	LDO, 4.4V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG45G	-	LR1101G-45-AF5	LVR-IC	LDO, 4.5V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG45L	-	LR1101L-45-AF5	LVR-IC	LDO, 4.5V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG46G	-	LR1101G-46-AF5	LVR-IC	LDO, 4.6V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG46L	-	LR1101L-46-AF5	LVR-IC	LDO, 4.6V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG47G	-	LR1101G-47-AF5	LVR-IC	LDO, 4.7V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG47L	-	LR1101L-47-AF5	LVR-IC	LDO, 4.7V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG48G	-	LR1101G-48-AF5	LVR-IC	LDO, 4.8V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG48L	-	LR1101L-48-AF5	LVR-IC	LDO, 4.8V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG49G	-	LR1101G-49-AF5	LVR-IC	LDO, 4.9V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG49L	-	LR1101L-49-AF5	LVR-IC	LDO, 4.9V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SG50G	-	LR1101G-50-AF5	LVR-IC	LDO, 5.0V±2%, 100mA, -CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SG50L	-	LR1101L-50-AF5	LVR-IC	LDO, 5.0V±2%, 100mA, -CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SGA	-	S-1135B10-M5T1S	LVR-IC	LDO, 1.0V±15mV, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGAA	-	MIC2287BD5	LDR-IC	PWM boost converter, 1.2MHz, Vin=2.5..10V	SOT-23-5	28sq	LD3	6g	Mcr
SGAA	fd	MIC2287YD5	LDR-IC	PWM boost converter, 1.2MHz, Vin=2.5..10V, Lead. Free	SOT-23-5	28sq	LD3	6g	Mcr
SGB	-	S-1135B11-M5T1S	LVR-IC	LDO, 1.1V±15mV, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGC	-	S-1135B12-M5T1S	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGD	-	S-1135B13-M5T1S	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGE	-	S-1135B14-M5T1S	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGF	-	S-1135B15-M5T1S	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGG	-	S-1135B16-M5T1S	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGH	-	S-1135B17-M5T1S	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGI	-	S-1135B18-M5T1S	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGJ	-	S-1135B1J-M5T1S	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGK	-	S-1135B19-M5T1S	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGL	-	S-1135B20-M5T1S	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGM	-	S-1135B21-M5T1S	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGN	-	S-1135B22-M5T1S	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGO	-	S-1135B23-M5T1S	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGP	-	S-1135B24-M5T1S	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGQ	-	S-1135B25-M5T1S	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGR	-	S-1135B26-M5T1S	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGS	-	S-1135B27-M5T1S	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGT	-	S-1135B28-M5T1S	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGU	-	S-1135B2J-M5T1S	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGV	-	S-1135B29-M5T1S	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGW	-	S-1135B30-M5T1S	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGX	-	S-1135B31-M5T1S	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGY	-	S-1135B32-M5T1S	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
SGZ	-	S-1135B33-M5T1S	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
sh	-	PT7M7823JTA	Vdet-IC	4.0V±1.5%, -Reset PPO, -MR, WD	SOT-23-5	28cp	VD17	6k	Pti
sh	ev	PT7M7823JTAE	Vdet-IC	4.0V±1.5%, -Reset PPO, -MR, WD, Lead free	SOT-23-5	28cp	VD17	6k	Pti





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SH	-	TC75S60F	Op-IC	CMOS, Vcc=±0.9..±3.5V, Icc0=20µA	SMV	28opf	OP1	6a	Tos
SH	-	TC75S60FU	Op-IC	CMOS, Vcc=±0.9..±3.5V, Icc0=20µA	USV	28opf	OP1	6a	Tos
SHE	-	NCP300LSN20T1	Vdet-IC	2.0V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
si	-	PT7M7824JTA	Vdet-IC	4.0V±1.5%, ±Reset PPO, WD	SOT-23-5	28xg	VD19	6k	Pti
si	ev	PT7M7824JTAE	Vdet-IC	4.0V±1.5%, ±Reset PPO, WD, Lead free	SOT-23-5	28xg	VD19	6k	Pti
SIM	-	NCV300LSN20T1	Vdet-IC	2.0V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SIW	-	NCV300LSN27T1	Vdet-IC	2.7V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
sj	-	PT7M7825JTA	Vdet-IC	4.0V±1.5%, ±Reset PPO, -MR	SOT-23-5	28xf	VD21	6k	Pti
sj	ev	PT7M7825JTAE	Vdet-IC	4.0V±1.5%, ±Reset PPO, -MR, Lead free	SOT-23-5	28xf	VD21	6k	Pti
SJH	-	NCP302HSN40T1	Vdet-IC	4.0V±1.5%, +Reset PPO	TSOP-5	28vdo	VD3	6k	Ons
SKJ	-	NCP300LSN46T1	Vdet-IC	4.6V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SKK	-	NCP300LSN44T1	Vdet-IC	4.4V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SKS	-	NCV300LSN36T1	Vdet-IC	3.6V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SKU	-	NCP300LSN34T1	Vdet-IC	3.4V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SKV	-	NCP300LSN33T1	Vdet-IC	3.3V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SL	-	R1122N301B	LVR-IC	LDO, Low noise, 3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
SM	-	R1122N311B	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
SM18G	-	LR1106G-18-AF5	LVR-IC	LDO, 1.8V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM18L	-	LR1106L-18-AF5	LVR-IC	LDO, 1.8V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM19G	-	LR1106G-19-AF5	LVR-IC	LDO, 1.9V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM19L	-	LR1106L-19-AF5	LVR-IC	LDO, 1.9V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM20G	-	LR1106G-20-AF5	LVR-IC	LDO, 2.0V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM20L	-	LR1106L-20-AF5	LVR-IC	LDO, 2.0V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM21G	-	LR1106G-21-AF5	LVR-IC	LDO, 2.1V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM21L	-	LR1106L-21-AF5	LVR-IC	LDO, 2.1V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM22G	-	LR1106G-22-AF5	LVR-IC	LDO, 2.2V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM22L	-	LR1106L-22-AF5	LVR-IC	LDO, 2.2V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM23G	-	LR1106G-23-AF5	LVR-IC	LDO, 2.3V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM23L	-	LR1106L-23-AF5	LVR-IC	LDO, 2.3V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM24G	-	LR1106G-24-AF5	LVR-IC	LDO, 2.4V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM24L	-	LR1106L-24-AF5	LVR-IC	LDO, 2.4V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM25G	-	LR1106G-25-AF5	LVR-IC	LDO, 2.5V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM25L	-	LR1106L-25-AF5	LVR-IC	LDO, 2.5V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM26G	-	LR1106G-26-AF5	LVR-IC	LDO, 2.6V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM26L	-	LR1106L-26-AF5	LVR-IC	LDO, 2.6V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM27G	-	LR1106G-27-AF5	LVR-IC	LDO, 2.7V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM27L	-	LR1106L-27-AF5	LVR-IC	LDO, 2.7V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM28G	-	LR1106G-28-AF5	LVR-IC	LDO, 2.8V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM28L	-	LR1106L-28-AF5	LVR-IC	LDO, 2.8V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM29G	-	LR1106G-29-AF5	LVR-IC	LDO, 2.9V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM29L	-	LR1106L-29-AF5	LVR-IC	LDO, 2.9V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM2JG	-	LR1106G-2J-AF5	LVR-IC	LDO, 2.85V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM2JL	-	LR1106L-2J-AF5	LVR-IC	LDO, 2.85V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM30G	-	LR1106G-30-AF5	LVR-IC	LDO, 3.0V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM30L	-	LR1106L-30-AF5	LVR-IC	LDO, 3.0V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM31G	-	LR1106G-31-AF5	LVR-IC	LDO, 3.1V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM31L	-	LR1106L-31-AF5	LVR-IC	LDO, 3.1V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM32G	-	LR1106G-32-AF5	LVR-IC	LDO, 3.2V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM32L	-	LR1106L-32-AF5	LVR-IC	LDO, 3.2V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM33G	-	LR1106G-33-AF5	LVR-IC	LDO, 3.3V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM33L	-	LR1106L-33-AF5	LVR-IC	LDO, 3.3V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM34G	-	LR1106G-34-AF5	LVR-IC	LDO, 3.4V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM34L	-	LR1106L-34-AF5	LVR-IC	LDO, 3.4V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM35G	-	LR1106G-35-AF5	LVR-IC	LDO, 3.5V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM35L	-	LR1106L-35-AF5	LVR-IC	LDO, 3.5V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM36G	-	LR1106G-36-AF5	LVR-IC	LDO, 3.6V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM36L	-	LR1106L-36-AF5	LVR-IC	LDO, 3.6V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM37G	-	LR1106G-37-AF5	LVR-IC	LDO, 3.7V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM37L	-	LR1106L-37-AF5	LVR-IC	LDO, 3.7V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM38G	-	LR1106G-38-AF5	LVR-IC	LDO, 3.8V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM38L	-	LR1106L-38-AF5	LVR-IC	LDO, 3.8V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM39G	-	LR1106G-39-AF5	LVR-IC	LDO, 3.9V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM39L	-	LR1106L-39-AF5	LVR-IC	LDO, 3.9V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM40G	-	LR1106G-40-AF5	LVR-IC	LDO, 4.0V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM40L	-	LR1106L-40-AF5	LVR-IC	LDO, 4.0V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM41G	-	LR1106G-41-AF5	LVR-IC	LDO, 4.1V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM41L	-	LR1106L-41-AF5	LVR-IC	LDO, 4.1V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM42G	-	LR1106G-42-AF5	LVR-IC	LDO, 4.2V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM42L	-	LR1106L-42-AF5	LVR-IC	LDO, 4.2V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM43G	-	LR1106G-43-AF5	LVR-IC	LDO, 4.3V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SM43L	-	LR1106L-43-AF5	LVR-IC	LDO, 4.3V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM44G	-	LR1106G-44-AF5	LVR-IC	LDO, 4.4V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM44L	-	LR1106L-44-AF5	LVR-IC	LDO, 4.4V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM45G	-	LR1106G-45-AF5	LVR-IC	LDO, 4.5V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM45L	-	LR1106L-45-AF5	LVR-IC	LDO, 4.5V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM46G	-	LR1106G-46-AF5	LVR-IC	LDO, 4.6V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM46L	-	LR1106L-46-AF5	LVR-IC	LDO, 4.6V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM47G	-	LR1106G-47-AF5	LVR-IC	LDO, 4.7V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM47L	-	LR1106L-47-AF5	LVR-IC	LDO, 4.7V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM48G	-	LR1106G-48-AF5	LVR-IC	LDO, 4.8V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM48L	-	LR1106L-48-AF5	LVR-IC	LDO, 4.8V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM49G	-	LR1106G-49-AF5	LVR-IC	LDO, 4.9V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM49L	-	LR1106L-49-AF5	LVR-IC	LDO, 4.9V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM50G	-	LR1106G-50-AF5	LVR-IC	LDO, 5.0V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM50L	-	LR1106L-50-AF5	LVR-IC	LDO, 5.0V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM51G	-	LR1106G-51-AF5	LVR-IC	LDO, 5.1V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM51L	-	LR1106L-51-AF5	LVR-IC	LDO, 5.1V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM52G	-	LR1106G-52-AF5	LVR-IC	LDO, 5.2V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM52L	-	LR1106L-52-AF5	LVR-IC	LDO, 5.2V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM53G	-	LR1106G-53-AF5	LVR-IC	LDO, 5.3V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM53L	-	LR1106L-53-AF5	LVR-IC	LDO, 5.3V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM54G	-	LR1106G-54-AF5	LVR-IC	LDO, 5.4V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM54L	-	LR1106L-54-AF5	LVR-IC	LDO, 5.4V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM55G	-	LR1106G-55-AF5	LVR-IC	LDO, 5.5V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM55L	-	LR1106L-55-AF5	LVR-IC	LDO, 5.5V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM56G	-	LR1106G-56-AF5	LVR-IC	LDO, 5.6V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM56L	-	LR1106L-56-AF5	LVR-IC	LDO, 5.6V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM57G	-	LR1106G-57-AF5	LVR-IC	LDO, 5.7V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM57L	-	LR1106L-57-AF5	LVR-IC	LDO, 5.7V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM58G	-	LR1106G-58-AF5	LVR-IC	LDO, 5.8V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM58L	-	LR1106L-58-AF5	LVR-IC	LDO, 5.8V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM59G	-	LR1106G-59-AF5	LVR-IC	LDO, 5.9V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM59L	-	LR1106L-59-AF5	LVR-IC	LDO, 5.9V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SM60G	-	LR1106G-60-AF5	LVR-IC	LDO, 6.0V±2%, 400mA, +CE, Halogen-free	SOT-25	28cx	VR4	6a	Utc
SM60L	-	LR1106L-60-AF5	LVR-IC	LDO, 6.0V±2%, 400mA, +CE, Lead-free	SOT-25	28cx	VR4	6a	Utc
SMD	-	NCP301HSN22T1	Vdet-IC	2.2V±1.5%, +Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SMP	-	NCP301LSN46T1	Vdet-IC	4.6V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SMS	-	NCP301LSN42T1	Vdet-IC	4.2V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SMU	-	NCP301LSN40T1	Vdet-IC	4.0V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SMY	-	NCP301LSN36T1	Vdet-IC	3.6V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SN	-	R1122N321B	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
SNA	-	NCP301LSN34T1	Vdet-IC	3.4V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SNB	-	NCP301LSN33T1	Vdet-IC	3.3V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SNC	-	NCP301LSN32T1	Vdet-IC	3.2V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SNE	-	NCP301LSN26T1	Vdet-IC	2.6V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SNF	-	NCP301LSN25T1	Vdet-IC	2.5V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SNG	-	NCP301LSN22T1	Vdet-IC	2.2V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SNJ	-	NCP301LSN16T1	Vdet-IC	1.6V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SNN	-	NCP301LSN12T1	Vdet-IC	1.2V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SP	-	KIC7S00FU	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6a	Kec
SP	-	R1122N331B	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
SQ	-	KIC7S02FU	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6a	Kec
SQ	-	R1122N341B	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
SQV	-	NCV300LSN30T1	Vdet-IC	3.0V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SR	-	KIC7S04FU	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Kec
SR	-	R1122N351B	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
SRA	-	NCP300LSN185T	Vdet-IC	1.85V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SRK	-	NCV301LSN12T1	Vdet-IC	1.2V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SRL	-	NCV301LSN16T1	Vdet-IC	1.6V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SRM	-	NCV301LSN20T1	Vdet-IC	2.0V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SRN	-	NCV301LSN25T1	Vdet-IC	2.5V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SRO	-	NCV301LSN28T1	Vdet-IC	2.8V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SRP	-	NCV301LSN40T1	Vdet-IC	4.0V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SRQ	-	NCV301LSN45T1	Vdet-IC	4.5V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SRS	-	NCV303LSN13T1	Vdet-IC	1.3V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SRT	-	NCV303LSN14T1	Vdet-IC	1.4V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SRU	-	NCV303LSN15T1	Vdet-IC	1.5V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SRV	-	NCV303LSN16T1	Vdet-IC	1.6V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SRW	-	NCV303LSN20T1	Vdet-IC	2.0V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SRX	-	NCV303LSN23T1	Vdet-IC	2.3V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SS	-	KIC7SU04FU	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Kec
SS	-	R1122N361B	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
SSA	-	NCV303LSN30T1	Vdet-IC	3.0V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SSC	-	NCV303LSN36T1	Vdet-IC	3.6V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SSE	-	NCV303LSN42T1	Vdet-IC	4.2V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SSF	-	NCV303LSN44T1	Vdet-IC	4.4V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SSG	-	NCV303LSN45T1	Vdet-IC	4.5V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SSH	-	NCV303LSN46T1	Vdet-IC	4.6V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SSI	-	NCV303LSN49T1	Vdet-IC	4.9V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SSJ	-	NCV301LSN47T1	Vdet-IC	4.7V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SSK	-	NCV303LSN29T1	Vdet-IC	2.6V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
SSL	-	NCV300LSN28T1	Vdet-IC	2.8V±1.5%, -Reset PPO	TSOP-5	28vdm	VD7	6k	Ons
SSM	-	NCV303LSN10T1	Vdet-IC	1.0V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
ST	-	KIC7S08FU	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Kec
ST	-	R1122N371B	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
SU	-	KIC7S14FU	CMOS-Log	Inverting Schmitt-trigger	SOT-353	28	Log7	6a	Kec
SU	-	R1122N381B	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
SU4	-	NC7SU04P5	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	F
SUA	-	NCV301LSN22T1	Vdet-IC	2.2V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SUD	-	NCV301HSN27T1	Vdet-IC	2.7V±1.5%, +Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
SV	-	KIC7S32FU	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6a	Kec
SV	-	R1122N391B	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
SW	-	KIC7S66FU	CMOS-Log	Single-pole single-throw analog switch	SOT-353	28	Log16	6a	Kec
SX	-	KIC7S86FU	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353	28	Log5	6a	Kec
SY	-	2SA1618-Y	Si-pnp	Dual, 50V, 150mA, 300mW, B=120..240, >80MHz	SOT-25	28	T12	6a	Tos
SY	-	2SA1873-Y	Si-pnp	Dual, AF-Amp, 50V, 150mA, 200mW, B=120..240	SOT-25	28	T12	6a	Tos
T0	-	BD45485G	Vdet-IC	4.8V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
T0	-	R1121N401B	LVR-IC	LDO, Low noise, 4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
T00	-	74HCT1G00GV	CMOS-Log	2-input NAND gate	SOT753	28	Log1	6a	Nxp
T00	-	NC7ST00P5	CMOS-Log	2-input NAND gate	SC-70-5	28	Log1	6a	F
T00	-	RP202N281D5	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T00	-	U74AHCT1G00-AF5	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6a	Utc
T00	-	U74AHCT1G00-AL5	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6a	Utc
T001	-	RP201Q282D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T008	-	RP201Q082D	LVR-IC	LDO, 0.8V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T009	-	RP201Q092D	LVR-IC	LDO, 0.9V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T00L	-	U74AHCT1G00L-AF5	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6a	Utc
T00L	-	U74AHCT1G00L-AL5	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6a	Utc
T01	-	RP202N121D5	LVR-IC	LDO, 1.25V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T010	-	RP201Q102D	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T011	-	RP201Q112D	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T012	-	RP201Q122D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T013	-	RP201Q132D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T014	-	RP201Q142D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T015	-	RP201Q152D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T016	-	RP201Q162D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T017	-	RP201Q172D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T018	-	RP201Q182D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T019	-	RP201Q192D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T02	-	74HCT1G02GV	CMOS-Log	2-input NOR gate	SOT753	28	Log2	6a	Nxp
T02	-	NC7ST02P5	CMOS-Log	2-input NOR gate	SC-70-5	28	Log2	6a	F
T02	-	RP202N291D5	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T02	-	U74AHCT1G02-AF5	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6a	Utc
T02	-	U74AHCT1G02-AL5	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6a	Utc
T020	-	RP201Q202D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T021	-	RP201Q212D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T022	-	RP201Q222D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T023	-	RP201Q232D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T024	-	RP201Q242D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T025	-	RP201Q252D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T026	-	RP201Q262D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T027	-	RP201Q272D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T028	-	RP201Q282D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T029	-	RP201Q292D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR12	6ma	Ric
T02L	-	U74AHC1TG02L-AF5	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6a	Utc
T02L	-	U74AHC1TG02L-AL5	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6a	Utc
T02L	-	U74AHCT1G02L-AF5	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6a	Utc
T02L	-	U74AHCT1G02L-AL5	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6a	Utc
T030	-	RP201Q302D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T031	-	RP201Q312D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T032	-	RP201Q322D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T033	-	RP201Q332D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T034	-	RP201Q342D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T035	-	RP201Q352D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T036	-	RP201Q362D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T037	-	RP201Q372D	LVR-IC	LDO, 3.7V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T038	-	RP201Q382D	LVR-IC	LDO, 3.8V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T039	-	RP201Q392D	LVR-IC	LDO, 3.9V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T04	-	74HCT1G04GV	CMOS-Log	Inverter	SOT753	28	Log6	6a	Nxp
T04	-	NC7ST04P5	CMOS-Log	Inverter	SC-70-5	28	Log6	6a	F
T04	-	U74AHCT1G04-AF5	CMOS-Log	Inverter	SOT-23-5	28	Log6	6a	Utc
T04	-	U74AHCT1G04-AL5	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Utc
T040	-	RP201Q402D	LVR-IC	LDO, 4.0V±1%, 150mA, +CE, CL, ECO(Mode)	SC-88A	28xx	VR10	6ma	Ric
T08	-	74HCT1G08GV	CMOS-Log	2-input AND gate	SOT753	28	Log3	6a	Nxp
T08	-	NC7ST08P5	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6a	F
T08	-	RP202N081D	LVR-IC	LDO, 0.8V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T08	-	U74AHCT1G08-AF5	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6a	Utc
T08	-	U74AHCT1G08-AL5	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Utc
T08L	-	U74AHC1TG08L-AF5	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6a	Utc
T08L	-	U74AHC1TG08L-AL5	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Utc
T08L	-	U74AHCT1G08L-AF5	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6a	Utc
T08L	-	U74AHCT1G08L-AL5	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Utc
T09	-	RP202N091D	LVR-IC	LDO, 0.9V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T09	ef	XC9225A096M	DC-DC-IC	PWM step-down, 600kHz, 0.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T09	ei	XC9225B096M	DC-DC-IC	PWM step-down, 600kHz, 0.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T09	en	XC9225C096M	DC-DC-IC	PWM step-down, 600kHz, 0.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T09	er	XC9225D096M	DC-DC-IC	PWM step-down, 600kHz, 0.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T0A	-	R3134N33EA	Vdet-IC	3.3V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0B	-	R3134N34EA	Vdet-IC	3.4V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0C	-	R3134N35EA	Vdet-IC	3.5V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0D	-	R3134N36EA	Vdet-IC	3.6V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0E	-	R3134N37EA	Vdet-IC	3.7V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0F	-	R3134N38EA	Vdet-IC	3.8V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0G	-	R3134N39EA	Vdet-IC	3.9V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0H	-	R3134N40EA	Vdet-IC	4.0V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0J	-	R3134N41EA	Vdet-IC	4.1V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0K	-	R3134N42EA	Vdet-IC	4.2V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0L	-	R3134N43EA	Vdet-IC	4.3V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0M	-	R3134N44EA	Vdet-IC	4.4V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0M	ef	XC9225A09CM	DC-DC-IC	PWM step-down, 1.2MHz, 0.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T0M	ei	XC9225B09CM	DC-DC-IC	PWM step-down, 1.2MHz, 0.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T0M	en	XC9225C09CM	DC-DC-IC	PWM step-down, 1.2MHz, 0.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T0M	er	XC9225D09CM	DC-DC-IC	PWM step-down, 1.2MHz, 0.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T0N	-	R3134N45EA	Vdet-IC	4.5V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0P	-	R3134N46EA	Vdet-IC	4.6V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0R	-	R3134N47EA	Vdet-IC	4.7V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0S	-	R3134N48EA	Vdet-IC	4.8V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0T	-	R3134N49EA	Vdet-IC	4.9V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0U	-	R3134N50EA	Vdet-IC	5.0V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0V	-	R3134N23EA2	Vdet-IC	2.32V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0W	-	R3134N26EA3	Vdet-IC	2.63V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0X	-	R3134N29EA3	Vdet-IC	2.93V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0Y	-	R3134N30EA8	Vdet-IC	3.08V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T0Z	-	R3134N43EA8	Vdet-IC	4.38V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
T1	-	BD45475G	Vdet-IC	4.7V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
T1	-	HD74LV1GT00ACM	CMOS-Log	2-input NAND gate	CMPAK-5	28	Log1	6a	Ren
T1	-	HD74LV1GT00AVS	CMOS-Log	2-input NAND gate	VSON-5	30	Log1	6a	Ren
T1	-	R1121N411B	LVR-IC	LDO, Low noise, 4.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
T1-	-	PZU2.7DB2	Z-diode	Dual, 2.65..2.9V, Izt=5mA, Zzt=100Ω, 250mW	SOT-353	28ds	-	6a	NxH
T10	-	MIC1555BM5	Lin-IC	RC Timer/Oscillator, 2.7..18V, 0.05%/°C	SOT-23-5	28la	AD2	6g	Mcr
T10	-	RP202N101D	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T10	ef	XC9225A106M	DC-DC-IC	PWM step-down, 600kHz, 1.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T10	ei	XC9225B106M	DC-DC-IC	PWM step-down, 600kHz, 1.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T10	en	XC9225C106M	DC-DC-IC	PWM step-down, 600kHz, 1.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T10	er	XC9225D106M	DC-DC-IC	PWM step-down, 600kHz, 1.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T10	fc	MIC1555YM5	Lin-IC	RC Timer/Oscillator, 2.7..18V, 0.05%/°C, Pb. Free	SOT-23-5	28la	AD2	6g	Mcr
T10A	-	FC6209A192M	LVR-IC	LDO, 1.9V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T10A	-	ML6209A192M	LVR-IC	LDO, 1.9V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T10B	-	FC6209B192M	LVR-IC	LDO, 1.9V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T10B	-	ML6209B192M	LVR-IC	LDO, 1.9V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T10C	-	FC6209C192M	LVR-IC	LDO, 1.9V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T10C	-	ML6209C192M	LVR-IC	LDO, 1.9V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T10D	-	FC6209D192M	LVR-IC	LDO, 1.9V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T10D	-	ML6209D192M	LVR-IC	LDO, 1.9V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T11	-	MIC1557BM5	Lin-IC	RC Timer/Oscillator, 2.7..18V, 0.05%/°C	SOT-23-5	28lb	AD1	6g	Mcr
T11	-	RP202N111D	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T11	ef	XC9225A116M	DC-DC-IC	PWM step-down, 600kHz, 1.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T11	ei	XC9225B116M	DC-DC-IC	PWM step-down, 600kHz, 1.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T11	en	XC9225C116M	DC-DC-IC	PWM step-down, 600kHz, 1.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T11	er	XC9225D116M	DC-DC-IC	PWM step-down, 600kHz, 1.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T11	fc	MIC1557YM5	Lin-IC	RC Timer/Oscillator, 2.7..18V, 0.05%/°C, Pb. Free	SOT-23-5	28lb	AD1	6g	Mcr
T12	-	RP202N121D	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T12	ef	XC9225A126M	DC-DC-IC	PWM step-down, 600kHz, 1.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T12	ei	XC9225B126M	DC-DC-IC	PWM step-down, 600kHz, 1.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T12	en	XC9225C126M	DC-DC-IC	PWM step-down, 600kHz, 1.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T12	er	XC9225D126M	DC-DC-IC	PWM step-down, 600kHz, 1.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T13	-	RP202N131D	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T13	ef	XC9225A136M	DC-DC-IC	PWM step-down, 600kHz, 1.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T13	ei	XC9225B136M	DC-DC-IC	PWM step-down, 600kHz, 1.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T13	en	XC9225C136M	DC-DC-IC	PWM step-down, 600kHz, 1.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T13	er	XC9225D136M	DC-DC-IC	PWM step-down, 600kHz, 1.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T14	-	74HCT1G14GV	CMOS-Log	Inverting Schmitt-trigger	SOT753	28	Log7	6a	Nxp
T14	-	NC7ST14P5	CMOS-Log	Inverting Schmitt-trigger	SC-70-5	28	Log7	6a	F
T14	-	RP202N141D	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T14	ef	XC9225A146M	DC-DC-IC	PWM step-down, 600kHz, 1.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T14	ei	XC9225B146M	DC-DC-IC	PWM step-down, 600kHz, 1.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T14	en	XC9225C146M	DC-DC-IC	PWM step-down, 600kHz, 1.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T14	er	XC9225D146M	DC-DC-IC	PWM step-down, 600kHz, 1.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T15	-	R1162N151D	LVR-IC	LDO, 1.5V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T15	-	RP202N151D	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T15	ef	XC9225A156M	DC-DC-IC	PWM step-down, 600kHz, 1.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T15	ei	XC9225B156M	DC-DC-IC	PWM step-down, 600kHz, 1.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T15	en	XC9225C156M	DC-DC-IC	PWM step-down, 600kHz, 1.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T15	er	XC9225D156M	DC-DC-IC	PWM step-down, 600kHz, 1.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T15A	-	FC6209A152M	LVR-IC	LDO, 1.5V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T15A	-	ML6209A152M	LVR-IC	LDO, 1.5V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T15B	-	FC6209B152M	LVR-IC	LDO, 1.5V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T15B	-	ML6209B152M	LVR-IC	LDO, 1.5V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T15C	-	FC6209C152M	LVR-IC	LDO, 1.5V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T15C	-	ML6209C152M	LVR-IC	LDO, 1.5V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T15D	-	FC6209D152M	LVR-IC	LDO, 1.5V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T15D	-	ML6209D152M	LVR-IC	LDO, 1.5V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T16	-	R1162N161D	LVR-IC	LDO, 1.6V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T16	-	RP202N161D	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T16	ef	XC9225A166M	DC-DC-IC	PWM step-down, 600kHz, 1.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T16	ei	XC9225B166M	DC-DC-IC	PWM step-down, 600kHz, 1.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T16	en	XC9225C166M	DC-DC-IC	PWM step-down, 600kHz, 1.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T16	er	XC9225D166M	DC-DC-IC	PWM step-down, 600kHz, 1.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T16A	-	FC6209A162M	LVR-IC	LDO, 1.6V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T16A	-	ML6209A162M	LVR-IC	LDO, 1.6V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T16B	-	FC6209B162M	LVR-IC	LDO, 1.6V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T16B	-	ML6209B162M	LVR-IC	LDO, 1.6V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T16C	-	FC6209C162M	LVR-IC	LDO, 1.6V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T16C	-	ML6209C162M	LVR-IC	LDO, 1.6V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T16D	-	FC6209D162M	LVR-IC	LDO, 1.6V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T16D	-	ML6209D162M	LVR-IC	LDO, 1.6V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T17	-	R1162N171D	LVR-IC	LDO, 1.7V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T17	-	RP202N171D	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T17	ef	XC9225A176M	DC-DC-IC	PWM step-down, 600kHz, 1.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T17	ei	XC9225B176M	DC-DC-IC	PWM step-down, 600kHz, 1.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T17	en	XC9225C176M	DC-DC-IC	PWM step-down, 600kHz, 1.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T17	er	XC9225D176M	DC-DC-IC	PWM step-down, 600kHz, 1.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T17A	-	FC6209A172M	LVR-IC	LDO, 1.7V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T17A	-	ML6209A172M	LVR-IC	LDO, 1.7V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T17B	-	FC6209B172M	LVR-IC	LDO, 1.7V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T17B	-	ML6209B172M	LVR-IC	LDO, 1.7V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T17C	-	FC6209C172M	LVR-IC	LDO, 1.7V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T17C	-	ML6209C172M	LVR-IC	LDO, 1.7V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T17D	-	FC6209D172M	LVR-IC	LDO, 1.7V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T17D	-	ML6209D172M	LVR-IC	LDO, 1.7V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T18	-	R1162N181D	LVR-IC	LDO, 1.8V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T18	-	RP202N181D	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T18	ef	XC9225A186M	DC-DC-IC	PWM step-down, 600kHz, 1.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T18	ei	XC9225B186M	DC-DC-IC	PWM step-down, 600kHz, 1.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T18	en	XC9225C186M	DC-DC-IC	PWM step-down, 600kHz, 1.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T18	er	XC9225D186M	DC-DC-IC	PWM step-down, 600kHz, 1.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T19	-	R1162N191D	LVR-IC	LDO, 1.9V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T19	-	RP202N191D	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T19	ef	XC9225A196M	DC-DC-IC	PWM step-down, 600kHz, 1.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T19	ei	XC9225B196M	DC-DC-IC	PWM step-down, 600kHz, 1.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T19	en	XC9225C196M	DC-DC-IC	PWM step-down, 600kHz, 1.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T19	er	XC9225D196M	DC-DC-IC	PWM step-down, 600kHz, 1.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T19A	-	FC6209A182M	LVR-IC	LDO, 1.8V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T19A	-	ML6209A182M	LVR-IC	LDO, 1.8V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T19B	-	FC6209B182M	LVR-IC	LDO, 1.8V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T19B	-	ML6209B182M	LVR-IC	LDO, 1.8V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T19C	-	FC6209C182M	LVR-IC	LDO, 1.8V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T19C	-	ML6209C182M	LVR-IC	LDO, 1.8V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T19D	-	FC6209D182M	LVR-IC	LDO, 1.8V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T19D	-	ML6209D182M	LVR-IC	LDO, 1.8V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T1A	-	R3134N33EC	Vdet-IC	3.3V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1A	ef	XC9225A10CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T1A	ei	XC9225B10CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T1A	en	XC9225C10CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T1A	er	XC9225D10CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T1B	-	R3134N34EC	Vdet-IC	3.4V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1B	ef	XC9225A11CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T1B	ei	XC9225B11CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T1B	en	XC9225C11CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T1B	er	XC9225D11CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T1C	-	R3134N35EC	Vdet-IC	3.5V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1C	ef	XC9225A12CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T1C	ei	XC9225B12CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T1C	en	XC9225C12CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T1C	er	XC9225D12CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T1D	-	R3134N36EC	Vdet-IC	3.6V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1D	ef	XC9225A13CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T1D	ei	XC9225B13CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T1D	en	XC9225C13CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T1D	er	XC9225D13CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T1E	-	R3134N37EC	Vdet-IC	3.7V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1E	ef	XC9225A14CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T1E	ei	XC9225B14CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T1E	en	XC9225C14CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T1E	er	XC9225D14CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T1F	-	R3134N38EC	Vdet-IC	3.8V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1F	ef	XC9225A15CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T1F	ei	XC9225B15CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T1F	en	XC9225C15CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T1F	er	XC9225D15CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T1FA	-	FC6209A15AM	LVR-IC	LDO, 1.55V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T1FA	-	ML6209A15AM	LVR-IC	LDO, 1.55V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T1FB	-	FC6209B15AM	LVR-IC	LDO, 1.55V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T1FB	-	ML6209B15AM	LVR-IC	LDO, 1.55V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T1FC	-	FC6209C15AM	LVR-IC	LDO, 1.55V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T1FC	-	ML6209C15AM	LVR-IC	LDO, 1.55V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T1FD	-	FC6209D15AM	LVR-IC	LDO, 1.55V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T1FD	-	ML6209D15AM	LVR-IC	LDO, 1.55V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T1G	-	R3134N39EC	Vdet-IC	3.9V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1GA	-	FC6209A16AM	LVR-IC	LDO, 1.65V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T1GA	-	ML6209A16AM	LVR-IC	LDO, 1.65V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T1GB	-	FC6209B16AM	LVR-IC	LDO, 1.65V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T1GB	-	ML6209B16AM	LVR-IC	LDO, 1.65V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T1GC	-	FC6209C16AM	LVR-IC	LDO, 1.65V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T1GC	-	ML6209C16AM	LVR-IC	LDO, 1.65V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T1GD	-	FC6209D16AM	LVR-IC	LDO, 1.65V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T1GD	-	ML6209D16AM	LVR-IC	LDO, 1.65V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T1H	-	R3134N40EC	Vdet-IC	4.0V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1H	ef	XC9225A16CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T1H	ei	XC9225B16CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T1H	en	XC9225C16CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T1H	er	XC9225D16CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T1HA	-	FC6209A17AM	LVR-IC	LDO, 1.75V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T1HA	-	ML6209A17AM	LVR-IC	LDO, 1.75V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T1HB	-	FC6209B17AM	LVR-IC	LDO, 1.75V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T1HB	-	ML6209B17AM	LVR-IC	LDO, 1.75V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T1HC	-	FC6209C17AM	LVR-IC	LDO, 1.75V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T1HC	-	ML6209C17AM	LVR-IC	LDO, 1.75V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T1HD	-	FC6209D17AM	LVR-IC	LDO, 1.75V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T1HD	-	ML6209D17AM	LVR-IC	LDO, 1.75V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T1IA	-	FC6209A18AM	LVR-IC	LDO, 1.85V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T1IA	-	ML6209A18AM	LVR-IC	LDO, 1.85V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T1IB	-	FC6209B18AM	LVR-IC	LDO, 1.85V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T1IB	-	ML6209B18AM	LVR-IC	LDO, 1.85V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T1IC	-	FC6209C18AM	LVR-IC	LDO, 1.85V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T1IC	-	ML6209C18AM	LVR-IC	LDO, 1.85V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T1ID	-	FC6209D18AM	LVR-IC	LDO, 1.85V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T1ID	-	ML6209D18AM	LVR-IC	LDO, 1.85V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T1J	-	R3134N41EC	Vdet-IC	4.1V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1JA	-	FC6209A19AM	LVR-IC	LDO, 1.95V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T1JA	-	ML6209A19AM	LVR-IC	LDO, 1.95V±3%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T1JB	-	FC6209B19AM	LVR-IC	LDO, 1.95V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T1JB	-	ML6209B19AM	LVR-IC	LDO, 1.95V±3%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T1JC	-	FC6209C19AM	LVR-IC	LDO, 1.95V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T1JC	-	ML6209C19AM	LVR-IC	LDO, 1.95V±3%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T1JD	-	FC6209D19AM	LVR-IC	LDO, 1.95V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T1JD	-	ML6209D19AM	LVR-IC	LDO, 1.95V±3%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T1K	-	R3134N42EC	Vdet-IC	4.2V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1K	ef	XC9225A17CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T1K	ei	XC9225B17CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T1K	en	XC9225C17CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T1K	er	XC9225D17CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T1L	-	R3134N43EC	Vdet-IC	4.3V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1L	ef	XC9225A18CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T1L	ei	XC9225B18CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T1L	en	XC9225C18CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T1L	er	XC9225D18CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T1M	-	R3134N44EC	Vdet-IC	4.4V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1M	ef	XC9225A19CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T1M	ei	XC9225B19CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T1M	en	XC9225C19CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T1M	er	XC9225D19CM	DC-DC-IC	PWM step-down, 1.2MHz, 1.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T1N	-	R3134N45EC	Vdet-IC	4.5V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1N	-	XC74UL00AAN	CMOS-Log	2-input NAND gate	SOT-25	28	Log1	6a	Tor
T1p	-	PZU2.7DB2	Z-diode	Dual, 2.65..2.9V, Izt=5mA, Zzt=100Ω, 250mW	SOT-353	28ds	-	6a	NxH
T1P	-	R3134N46EC	Vdet-IC	4.6V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1R	-	R3134N47EC	Vdet-IC	4.7V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1S	-	R3134N48EC	Vdet-IC	4.8V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1t	-	PZU2.7DB2	Z-diode	Dual, 2.65..2.9V, Izt=5mA, Zzt=100Ω, 250mW	SOT-353	28ds	-	6a	NxM
T1T	-	R3134N49EC	Vdet-IC	4.9V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1U	-	R3134N50EC	Vdet-IC	5.0V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1V	-	R3134N23EC2	Vdet-IC	2.32V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1W	-	PZU2.7DB2	Z-diode	Dual, 2.65..2.9V, Izt=5mA, Zzt=100Ω, 250mW	SOT-353	28ds	-	6a	NxC
T1W	-	R3134N26EC3	Vdet-IC	2.63V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1X	-	R3134N29EC3	Vdet-IC	2.93V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1Y	-	R3134N30EC8	Vdet-IC	3.08V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T1Z	-	R3134N43EC8	Vdet-IC	4.38V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
T2	-	BD45465G	Vdet-IC	4.6V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
T2	-	HD74LV1GT08ACM	CMOS-Log	2-input AND gate	CMPAK-5	28	Log3	6a	Ren
T2	-	HD74LV1GT08AVS	CMOS-Log	2-input AND gate	VSON-5	30	Log3	6a	Ren
T2	-	R1121N421B	LVR-IC	LDO, Low noise, 4.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
T2-	-	PZU3.0DB2	Z-diode	Dual, 2.95..3.2 V, Izt=5mA, Zzt=95Ω, 250mW	SOT-353	28ds	-	6a	NxH
T20	-	R1162N201D	LVR-IC	LDO, 2.0V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T20	-	RP202N201D	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T20	-	XC31BPN20AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2V±3%	SOT-25	28xa	VR4	6g	Tor
T20	ef	XC9225A206M	DC-DC-IC	PWM step-down, 600kHz, 2.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T20	eh	XC6383D201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T20	ei	XC9225B206M	DC-DC-IC	PWM step-down, 600kHz, 2.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T20	en	XC9225C206M	DC-DC-IC	PWM step-down, 600kHz, 2.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T20	er	XC9225D206M	DC-DC-IC	PWM step-down, 600kHz, 2.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T20A	-	FC6209A202M	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T20A	-	ML6209A202M	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T20B	-	FC6209B202M	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T20B	-	ML6209B202M	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T20C	-	FC6209C202M	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T20C	-	ML6209C202M	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T20D	-	FC6209D202M	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T20D	-	ML6209D202M	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T21	-	R1162N211D	LVR-IC	LDO, 2.1V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T21	-	RP202N211D	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T21	-	XC31BPN21AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.1V±3%	SOT-25	28xa	VR4	6g	Tor
T21	ef	XC9225A216M	DC-DC-IC	PWM step-down, 600kHz, 2.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T21	eh	XC6383D211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T21	ei	XC9225B216M	DC-DC-IC	PWM step-down, 600kHz, 2.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T21	en	XC9225C216M	DC-DC-IC	PWM step-down, 600kHz, 2.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T21	er	XC9225D216M	DC-DC-IC	PWM step-down, 600kHz, 2.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T21A	-	FC6209A212M	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T21A	-	ML6209A212M	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T21B	-	FC6209B212M	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T21B	-	ML6209B212M	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T21C	-	FC6209C212M	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T21C	-	ML6209C212M	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T21D	-	FC6209D212M	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T21D	-	ML6209D212M	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T22	-	R1162N221D	LVR-IC	LDO, 2.2V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T22	-	RP202N221D	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T22	-	XC31BPN22AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.2V±3%	SOT-25	28xa	VR4	6g	Tor
T22	ef	XC9225A226M	DC-DC-IC	PWM step-down, 600kHz, 2.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T22	eh	XC6383D221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T22	ei	XC9225B226M	DC-DC-IC	PWM step-down, 600kHz, 2.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T22	en	XC9225C226M	DC-DC-IC	PWM step-down, 600kHz, 2.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T22	er	XC9225D226M	DC-DC-IC	PWM step-down, 600kHz, 2.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T22A	-	FC6209A222M	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T22A	-	ML6209A222M	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T22B	-	FC6209B222M	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T22B	-	ML6209B222M	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T22C	-	FC6209C222M	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T22C	-	ML6209C222M	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T22D	-	FC6209D222M	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T22D	-	ML6209D222M	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T23	-	R1162N231D	LVR-IC	LDO, 2.3V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T23	-	RP202N231D	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T23	-	XC31BPN23AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.3V±3%	SOT-25	28xa	VR4	6g	Tor
T23	ef	XC9225A236M	DC-DC-IC	PWM step-down, 600kHz, 2.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T23	eh	XC6383D231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T23	ei	XC9225B236M	DC-DC-IC	PWM step-down, 600kHz, 2.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T23	en	XC9225C236M	DC-DC-IC	PWM step-down, 600kHz, 2.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T23	er	XC9225D236M	DC-DC-IC	PWM step-down, 600kHz, 2.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T23A	-	FC6209A232M	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T23A	-	ML6209A232M	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T23B	-	FC6209B232M	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T23B	-	ML6209B232M	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T23C	-	FC6209C232M	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T23C	-	ML6209C232M	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T23D	-	FC6209D232M	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T23D	-	ML6209D232M	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T24	-	R1162N241D	LVR-IC	LDO, 2.4V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T24	-	RP202N241D	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T24	-	XC31BPN24AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.4V±3%	SOT-25	28xa	VR4	6g	Tor
T24	ef	XC9225A246M	DC-DC-IC	PWM step-down, 600kHz, 2.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T24	eh	XC6383D241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T24	ei	XC9225B246M	DC-DC-IC	PWM step-down, 600kHz, 2.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T24	en	XC9225C246M	DC-DC-IC	PWM step-down, 600kHz, 2.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T24	er	XC9225D246M	DC-DC-IC	PWM step-down, 600kHz, 2.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T24A	-	FC6209A242M	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T24A	-	ML6209A242M	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T24B	-	FC6209B242M	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T24B	-	ML6209B242M	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T24C	-	FC6209C242M	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T24C	-	ML6209C242M	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T24D	-	FC6209D242M	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T24D	-	ML6209D242M	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T25	-	74HCT1G125GV	CMOS-Log	Bus buffer gate with 3-state output	SOT753	28	Log14	6a	Nxp
T25	-	R1162N251D	LVR-IC	LDO, 2.5V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T25	-	RP202N251D	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T25	-	XC31BPN25AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.5V±3%	SOT-25	28xa	VR4	6g	Tor
T25	ef	XC9225A256M	DC-DC-IC	PWM step-down, 600kHz, 2.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T25	eh	XC6383D251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T25	ei	XC9225B256M	DC-DC-IC	PWM step-down, 600kHz, 2.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T25	en	XC9225C256M	DC-DC-IC	PWM step-down, 600kHz, 2.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T25	er	XC9225D256M	DC-DC-IC	PWM step-down, 600kHz, 2.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T25A	-	FC6209A252M	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T25A	-	ML6209A252M	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T25B	-	FC6209B252M	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T25B	-	ML6209B252M	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T25C	-	FC6209C252M	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T25C	-	ML6209C252M	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T25D	-	FC6209D252M	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T25D	-	ML6209D252M	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T26	-	74HCT1G126GV	CMOS-Log	Bus buffer gate with 3-state output	SOT753	28	Log13	6a	Nxp
T26	-	R1162N261D	LVR-IC	LDO, 2.6V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T26	-	RP202N261D	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T26	-	XC31BPN26AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.6V±3%	SOT-25	28xa	VR4	6g	Tor
T26	ef	XC9225A266M	DC-DC-IC	PWM step-down, 600kHz, 2.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T26	eh	XC6383D261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T26	ei	XC9225B266M	DC-DC-IC	PWM step-down, 600kHz, 2.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T26	en	XC9225C266M	DC-DC-IC	PWM step-down, 600kHz, 2.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T26	er	XC9225D266M	DC-DC-IC	PWM step-down, 600kHz, 2.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T26A	-	FC6209A262M	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T26A	-	ML6209A262M	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T26B	-	FC6209B262M	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T26B	-	ML6209B262M	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T26C	-	FC6209C262M	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T26C	-	ML6209C262M	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T26D	-	FC6209D262M	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T26D	-	ML6209D262M	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T27	-	R1162N271D	LVR-IC	LDO, 2.7V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T27	-	RP202N271D	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T27	-	XC31BPN27AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.7V±3%	SOT-25	28xa	VR4	6g	Tor
T27	ef	XC9225A276M	DC-DC-IC	PWM step-down, 600kHz, 2.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T27	eh	XC6383D271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T27	ei	XC9225B276M	DC-DC-IC	PWM step-down, 600kHz, 2.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T27	en	XC9225C276M	DC-DC-IC	PWM step-down, 600kHz, 2.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T27	er	XC9225D276M	DC-DC-IC	PWM step-down, 600kHz, 2.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T27A	-	FC6209A272M	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T27A	-	ML6209A272M	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T27B	-	FC6209B272M	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T27B	-	ML6209B272M	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T27C	-	FC6209C272M	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T27C	-	ML6209C272M	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T27D	-	FC6209D272M	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T27D	-	ML6209D272M	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T28	-	R1162N281D	LVR-IC	LDO, 2.8V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T28	-	RP202N281D	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T28	-	XC31BPN28AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.8V±3%	SOT-25	28xa	VR4	6g	Tor
T28	ef	XC9225A286M	DC-DC-IC	PWM step-down, 600kHz, 2.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T28	eh	XC6383D281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T28	ei	XC9225B286M	DC-DC-IC	PWM step-down, 600kHz, 2.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T28	en	XC9225C286M	DC-DC-IC	PWM step-down, 600kHz, 2.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T28	er	XC9225D286M	DC-DC-IC	PWM step-down, 600kHz, 2.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T28A	-	FC6209A282M	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T28A	-	ML6209A282M	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T28B	-	FC6209B282M	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T28B	-	ML6209B282M	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T28C	-	FC6209C282M	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T28C	-	ML6209C282M	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T28D	-	FC6209D282M	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T28D	-	ML6209D282M	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T29	-	R1162N291D	LVR-IC	LDO, 2.9V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T29	-	RP202N291D	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T29	-	XC31BPN29AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.9V±3%	SOT-25	28xa	VR4	6g	Tor
T29	ef	XC9225A296M	DC-DC-IC	PWM step-down, 600kHz, 2.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T29	eh	XC6383D291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T29	ei	XC9225B296M	DC-DC-IC	PWM step-down, 600kHz, 2.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T29	en	XC9225C296M	DC-DC-IC	PWM step-down, 600kHz, 2.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T29	er	XC9225D296M	DC-DC-IC	PWM step-down, 600kHz, 2.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T29A	-	FC6209A292M	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T29A	-	ML6209A292M	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T29B	-	FC6209B292M	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T29B	-	ML6209B292M	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T29C	-	FC6209C292M	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T29C	-	ML6209C292M	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T29D	-	FC6209D292M	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T29D	-	ML6209D292M	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T2A	ef	XC9225A20CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T2A	ei	XC9225B20CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T2A	en	XC9225C20CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T2A	er	XC9225D20CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T2AA	-	FC6209A20AM	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T2AA	-	ML6209A20AM	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T2AB	-	FC6209B20AM	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T2AB	-	ML6209B20AM	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T2AC	-	FC6209C20AM	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T2AC	-	ML6209C20AM	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T2AD	-	FC6209D20AM	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T2AD	-	ML6209D20AM	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T2B	ef	XC9225A21CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T2B	ei	XC9225B21CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T2B	en	XC9225C21CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T2B	er	XC9225D21CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T2BA	-	FC6209A21AM	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T2BA	-	ML6209A21AM	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T2BB	-	FC6209B21AM	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T2BB	-	ML6209B21AM	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T2BC	-	FC6209C21AM	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T2BC	-	ML6209C21AM	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T2BD	-	FC6209D21AM	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T2BD	-	ML6209D21AM	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T2C	ef	XC9225A22CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T2C	ei	XC9225B22CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T2C	en	XC9225C22CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T2C	er	XC9225D22CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T2CA	-	FC6209A22AM	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T2CA	-	ML6209A22AM	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T2CB	-	FC6209B22AM	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T2CB	-	ML6209B22AM	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T2CC	-	FC6209C22AM	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T2CC	-	ML6209C22AM	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T2CD	-	FC6209D22AM	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T2CD	-	ML6209D22AM	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T2D	ef	XC9225A23CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T2D	ei	XC9225B23CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T2D	en	XC9225C23CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T2D	er	XC9225D23CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T2DA	-	FC6209A23AM	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T2DA	-	ML6209A23AM	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T2DB	-	FC6209B23AM	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T2DB	-	ML6209B23AM	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T2DC	-	FC6209C23AM	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T2DC	-	ML6209C23AM	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T2DD	-	FC6209D23AM	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T2DD	-	ML6209D23AM	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T2E	ef	XC9225A24CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T2E	ei	XC9225B24CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T2E	en	XC9225C24CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T2E	er	XC9225D24CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T2EA	-	FC6209A24AM	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T2EA	-	ML6209A24AM	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T2EB	-	FC6209B24AM	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T2EB	-	ML6209B24AM	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T2EC	-	FC6209C24AM	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T2EC	-	ML6209C24AM	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T2ED	-	FC6209D24AM	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T2ED	-	ML6209D24AM	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T2F	ef	XC9225A25CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T2F	ei	XC9225B25CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T2F	en	XC9225C25CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T2F	er	XC9225D25CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T2FA	-	FC6209A25AM	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T2FA	-	ML6209A25AM	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T2FB	-	FC6209B25AM	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T2FB	-	ML6209B25AM	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T2FC	-	FC6209C25AM	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T2FC	-	ML6209C25AM	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T2FD	-	FC6209D25AM	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T2FD	-	ML6209D25AM	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T2GA	-	FC6209A26AM	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T2GA	-	ML6209A26AM	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T2GB	-	FC6209B26AM	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T2GB	-	ML6209B26AM	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T2GC	-	FC6209C26AM	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T2GC	-	ML6209C26AM	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T2GD	-	FC6209D26AM	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T2GD	-	ML6209D26AM	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T2H	ef	XC9225A26CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T2H	ei	XC9225B26CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T2H	en	XC9225C26CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T2H	er	XC9225D26CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T2HA	-	FC6209A27AM	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T2HA	-	ML6209A27AM	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T2HB	-	FC6209B27AM	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T2HB	-	ML6209B27AM	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T2HC	-	FC6209C27AM	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T2HC	-	ML6209C27AM	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T2HD	-	FC6209D27AM	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T2HD	-	ML6209D27AM	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T2IA	-	FC6209A28AM	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T2IA	-	ML6209A28AM	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T2IB	-	FC6209B28AM	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T2IB	-	ML6209B28AM	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T2IC	-	FC6209C28AM	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T2IC	-	ML6209C28AM	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T2ID	-	FC6209D28AM	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T2ID	-	ML6209D28AM	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T2JA	-	FC6209A29AM	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T2JA	-	ML6209A29AM	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T2JB	-	FC6209B29AM	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T2JB	-	ML6209B29AM	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T2JC	-	FC6209C29AM	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T2JC	-	ML6209C29AM	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T2JD	-	FC6209D29AM	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T2JD	-	ML6209D29AM	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T2K	ef	XC9225A27CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T2K	ei	XC9225B27CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T2K	en	XC9225C27CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T2K	er	XC9225D27CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T2L	ef	XC9225A28CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T2L	ei	XC9225B28CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T2L	en	XC9225C28CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T2L	er	XC9225D28CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T2M	ef	XC9225A29CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T2M	ei	XC9225B29CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T2M	en	XC9225C29CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T2M	er	XC9225D29CM	DC-DC-IC	PWM step-down, 1.2MHz, 2.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T2N	-	XC74UL08AAN	CMOS-Log	2-input AND gate	SOT-25	28	Log3	6a	Tor
T2p	-	PZU3.0DB2	Z-diode	Dual, 2.95..3.2 V, Izt=5mA, Zzt=95Ω, 250mW	SOT-353	28ds	-	6a	NxH
T2t	-	PZU3.0DB2	Z-diode	Dual, 2.95..3.2 V, Izt=5mA, Zzt=95Ω, 250mW	SOT-353	28ds	-	6a	NxM
T2W	-	PZU3.0DB2	Z-diode	Dual, 2.95..3.2 V, Izt=5mA, Zzt=95Ω, 250mW	SOT-353	28ds	-	6a	NxC
T3	-	BD45455G	Vdet-IC	4.5V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
T3	-	HD74LV1GT02ACM	CMOS-Log	2-input NOR gate	CMPAK-5	28	Log2	6a	Ren



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T3	-	HD74LV1GT02AVS	CMOS-Log	2-input NOR gate	VSON-5	30	Log2	6a	Ren
T3	-	R1121N431B	LVR-IC	LDO, Low noise, 4.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
T3-	-	PZU3.3DB2	Z-diode	Dual, 3.25..3.5V, Izt=5mA, Zzt=95Ω, 250mW	SOT-353	28ds	-	6a	NxH
T30	-	R1162N301D	LVR-IC	LDO, 3.0V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T30	-	RP202N301D	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T30	-	XC31BPN30AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3V±3%	SOT-25	28xa	VR4	6g	Tor
T30	ef	XC9225A306M	DC-DC-IC	PWM step-down, 600kHz, 3.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T30	eh	XC6383D301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T30	ei	XC9225B306M	DC-DC-IC	PWM step-down, 600kHz, 3.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T30	em	XC9225F306M	DC-DC-IC	PWM step-down, 600kHz, 3.0V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T30	en	XC9225C306M	DC-DC-IC	PWM step-down, 600kHz, 3.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T30	eo	XC9225H306M	DC-DC-IC	PWM step-down, 600kHz, 3.0V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T30	ep	XC9225G306M	DC-DC-IC	PWM step-down, 600kHz, 3.0V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T30	eq	XC9225E306M	DC-DC-IC	PWM step-down, 600kHz, 3.0V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T30	er	XC9225D306M	DC-DC-IC	PWM step-down, 600kHz, 3.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T30A	-	FC6209A302M	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T30A	-	ML6209A302M	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T30B	-	FC6209B302M	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T30B	-	ML6209B302M	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T30C	-	FC6209C302M	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T30C	-	ML6209C302M	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T30D	-	FC6209D302M	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T30D	-	ML6209D302M	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T31	-	R1162N311D	LVR-IC	LDO, 3.1V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T31	-	RP202N311D	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T31	-	XC31BPN31AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.1V±3%	SOT-25	28xa	VR4	6g	Tor
T31	ef	XC9225A316M	DC-DC-IC	PWM step-down, 600kHz, 3.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T31	eh	XC6383D311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T31	ei	XC9225B316M	DC-DC-IC	PWM step-down, 600kHz, 3.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T31	em	XC9225F316M	DC-DC-IC	PWM step-down, 600kHz, 3.1V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T31	en	XC9225C316M	DC-DC-IC	PWM step-down, 600kHz, 3.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T31	eo	XC9225H316M	DC-DC-IC	PWM step-down, 600kHz, 3.1V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T31	ep	XC9225G316M	DC-DC-IC	PWM step-down, 600kHz, 3.1V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T31	eq	XC9225E316M	DC-DC-IC	PWM step-down, 600kHz, 3.1V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T31	er	XC9225D316M	DC-DC-IC	PWM step-down, 600kHz, 3.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T31A	-	FC6209A312M	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T31A	-	ML6209A312M	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T31B	-	FC6209B312M	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T31B	-	ML6209B312M	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T31C	-	FC6209C312M	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T31C	-	ML6209C312M	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T31D	-	FC6209D312M	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T31D	-	ML6209D312M	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T32	-	74HCT1G32GV	CMOS-Log	2-input OR gate	SOT753	28	Log4	6a	Nxp
T32	-	NC7ST32P5	CMOS-Log	2-input OR gate	SC-70-5	28	Log4	6a	F
T32	-	R1162N321D	LVR-IC	LDO, 3.2V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T32	-	RP202N321D	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T32	-	U74AHCT1G32-AF5	CMOS-Log	2-input OR gate	SOT-23-5	28	Log4	6a	Utc
T32	-	U74AHCT1G32-AL5	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6a	Utc
T32	-	XC31BPN32AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.1V±3%	SOT-25	28xa	VR4	6g	Tor
T32	ef	XC9225A326M	DC-DC-IC	PWM step-down, 600kHz, 3.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T32	eh	XC6383D321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T32	ei	XC9225B326M	DC-DC-IC	PWM step-down, 600kHz, 3.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T32	em	XC9225F326M	DC-DC-IC	PWM step-down, 600kHz, 3.2V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T32	en	XC9225C326M	DC-DC-IC	PWM step-down, 600kHz, 3.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T32	eo	XC9225H326M	DC-DC-IC	PWM step-down, 600kHz, 3.2V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T32	ep	XC9225G326M	DC-DC-IC	PWM step-down, 600kHz, 3.2V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T32	eq	XC9225E326M	DC-DC-IC	PWM step-down, 600kHz, 3.2V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T32	er	XC9225D326M	DC-DC-IC	PWM step-down, 600kHz, 3.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T32A	-	FC6209A322M	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T32A	-	ML6209A322M	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T32B	-	FC6209B322M	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T32B	-	ML6209B322M	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T32C	-	FC6209C322M	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T32C	-	ML6209C322M	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T32D	-	FC6209D322M	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T32D	-	ML6209D322M	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T32G	-	U74AHCT1G32G-AF5	CMOS-Log	2-input OR gate	SOT-23-5	28	Log4	6a	Utc
T32G	-	U74AHCT1G32G-AL5	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6a	Utc
T32L	-	U74AHCT1G32L-AF5	CMOS-Log	2-input OR gate	SOT-23-5	28	Log4	6a	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T32L	-	U74AHCT1G32L-AL5	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6a	Utc
T33	-	R1162N331D	LVR-IC	LDO, 3.3V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T33	-	RP202N331D	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T33	-	XC31BPN33AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.3V±3%	SOT-25	28xa	VR4	6g	Tor
T33	ef	XC9225A336M	DC-DC-IC	PWM step-down, 600kHz, 3.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T33	eh	XC6383D331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T33	ei	XC9225B336M	DC-DC-IC	PWM step-down, 600kHz, 3.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T33	em	XC9225F336M	DC-DC-IC	PWM step-down, 600kHz, 3.3V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T33	en	XC9225C336M	DC-DC-IC	PWM step-down, 600kHz, 3.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T33	eo	XC9225H336M	DC-DC-IC	PWM step-down, 600kHz, 3.3V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T33	ep	XC9225G336M	DC-DC-IC	PWM step-down, 600kHz, 3.3V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T33	eq	XC9225E336M	DC-DC-IC	PWM step-down, 600kHz, 3.3V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T33	er	XC9225D336M	DC-DC-IC	PWM step-down, 600kHz, 3.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T33A	-	FC6209A332M	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T33A	-	ML6209A332M	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T33B	-	FC6209B332M	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T33B	-	ML6209B332M	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T33C	-	FC6209C332M	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T33C	-	ML6209C332M	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T33D	-	FC6209D332M	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T33D	-	ML6209D332M	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T34	-	R1162N341D	LVR-IC	LDO, 3.4V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T34	-	RP202N341D	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T34	-	XC31BPN34AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.4V±3%	SOT-25	28xa	VR4	6g	Tor
T34	ef	XC9225A346M	DC-DC-IC	PWM step-down, 600kHz, 3.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T34	eh	XC6383D341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T34	ei	XC9225B346M	DC-DC-IC	PWM step-down, 600kHz, 3.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T34	em	XC9225F346M	DC-DC-IC	PWM step-down, 600kHz, 3.4V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T34	en	XC9225C346M	DC-DC-IC	PWM step-down, 600kHz, 3.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T34	eo	XC9225H346M	DC-DC-IC	PWM step-down, 600kHz, 3.4V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T34	ep	XC9225G346M	DC-DC-IC	PWM step-down, 600kHz, 3.4V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T34	eq	XC9225E346M	DC-DC-IC	PWM step-down, 600kHz, 3.4V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T34	er	XC9225D346M	DC-DC-IC	PWM step-down, 600kHz, 3.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T34A	-	FC6209A342M	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T34A	-	ML6209A342M	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T34B	-	FC6209B342M	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T34B	-	ML6209B342M	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T34C	-	FC6209C342M	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T34C	-	ML6209C342M	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T34D	-	FC6209D342M	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T34D	-	ML6209D342M	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T35	-	R1162N351D	LVR-IC	LDO, 3.5V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T35	-	RP202N351D	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T35	-	XC31BPN35AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.5V±3%	SOT-25	28xa	VR4	6g	Tor
T35	ef	XC9225A356M	DC-DC-IC	PWM step-down, 600kHz, 3.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T35	eh	XC6383D351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T35	ei	XC9225B356M	DC-DC-IC	PWM step-down, 600kHz, 3.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T35	em	XC9225F356M	DC-DC-IC	PWM step-down, 600kHz, 3.5V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T35	en	XC9225C356M	DC-DC-IC	PWM step-down, 600kHz, 3.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T35	eo	XC9225H356M	DC-DC-IC	PWM step-down, 600kHz, 3.5V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T35	ep	XC9225G356M	DC-DC-IC	PWM step-down, 600kHz, 3.5V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T35	eq	XC9225E356M	DC-DC-IC	PWM step-down, 600kHz, 3.5V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T35	er	XC9225D356M	DC-DC-IC	PWM step-down, 600kHz, 3.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T35A	-	FC6209A352M	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T35A	-	ML6209A352M	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T35B	-	FC6209B352M	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T35B	-	ML6209B352M	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T35C	-	FC6209C352M	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T35C	-	ML6209C352M	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T35D	-	FC6209D352M	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T35D	-	ML6209D352M	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T36	-	R1162N361D	LVR-IC	LDO, 3.6V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T36	-	RP202N361D	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T36	-	XC31BPN36AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.6V±3%	SOT-25	28xa	VR4	6g	Tor
T36	ef	XC9225A366M	DC-DC-IC	PWM step-down, 600kHz, 3.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T36	eh	XC6383D361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T36	ei	XC9225B366M	DC-DC-IC	PWM step-down, 600kHz, 3.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T36	em	XC9225F366M	DC-DC-IC	PWM step-down, 600kHz, 3.6V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T36	en	XC9225C366M	DC-DC-IC	PWM step-down, 600kHz, 3.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T36	eo	XC9225H366M	DC-DC-IC	PWM step-down, 600kHz, 3.6V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T36	ep	XC9225G366M	DC-DC-IC	PWM step-down, 600kHz, 3.6V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T36	eq	XC9225E366M	DC-DC-IC	PWM step-down, 600kHz, 3.6V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T36	er	XC9225D366M	DC-DC-IC	PWM step-down, 600kHz, 3.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T36A	-	FC6209A362M	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T36A	-	ML6209A362M	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T36B	-	FC6209B362M	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T36B	-	ML6209B362M	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T36C	-	FC6209C362M	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T36C	-	ML6209C362M	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T36D	-	FC6209D362M	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T36D	-	ML6209D362M	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T37	-	R1162N371D	LVR-IC	LDO, 3.7V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T37	-	RP202N371D	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T37	-	XC31BPN37AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.7V±3%	SOT-25	28xa	VR4	6g	Tor
T37	ef	XC9225A376M	DC-DC-IC	PWM step-down, 600kHz, 3.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T37	eh	XC6383D371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T37	ei	XC9225B376M	DC-DC-IC	PWM step-down, 600kHz, 3.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T37	em	XC9225F376M	DC-DC-IC	PWM step-down, 600kHz, 3.7V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T37	en	XC9225C376M	DC-DC-IC	PWM step-down, 600kHz, 3.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T37	eo	XC9225H376M	DC-DC-IC	PWM step-down, 600kHz, 3.7V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T37	ep	XC9225G376M	DC-DC-IC	PWM step-down, 600kHz, 3.7V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T37	eq	XC9225E376M	DC-DC-IC	PWM step-down, 600kHz, 3.7V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T37	er	XC9225D376M	DC-DC-IC	PWM step-down, 600kHz, 3.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T37A	-	FC6209A372M	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T37A	-	ML6209A372M	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T37B	-	FC6209B372M	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T37B	-	ML6209B372M	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T37C	-	FC6209C372M	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T37C	-	ML6209C372M	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T37D	-	FC6209D372M	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T37D	-	ML6209D372M	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T38	-	R1162N381D	LVR-IC	LDO, 3.8V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T38	-	RP202N381D	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T38	-	XC31BPN38AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.8V±3%	SOT-25	28xa	VR4	6g	Tor
T38	ef	XC9225A386M	DC-DC-IC	PWM step-down, 600kHz, 3.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T38	eh	XC6383D381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T38	ei	XC9225B386M	DC-DC-IC	PWM step-down, 600kHz, 3.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T38	em	XC9225F386M	DC-DC-IC	PWM step-down, 600kHz, 3.8V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T38	en	XC9225C386M	DC-DC-IC	PWM step-down, 600kHz, 3.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T38	eo	XC9225H386M	DC-DC-IC	PWM step-down, 600kHz, 3.8V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T38	ep	XC9225G386M	DC-DC-IC	PWM step-down, 600kHz, 3.8V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T38	eq	XC9225E386M	DC-DC-IC	PWM step-down, 600kHz, 3.8V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T38	er	XC9225D386M	DC-DC-IC	PWM step-down, 600kHz, 3.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T38A	-	FC6209A382M	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T38A	-	ML6209A382M	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T38B	-	FC6209B382M	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T38B	-	ML6209B382M	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T38C	-	FC6209C382M	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T38C	-	ML6209C382M	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T38D	-	FC6209D382M	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T38D	-	ML6209D382M	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T39	-	R1162N391D	LVR-IC	LDO, 3.9V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T39	-	RP202N391D	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T39	-	XC31BPN39AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.9V±3%	SOT-25	28xa	VR4	6g	Tor
T39	ef	XC9225A396M	DC-DC-IC	PWM step-down, 600kHz, 3.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T39	eh	XC6383D391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T39	ei	XC9225B396M	DC-DC-IC	PWM step-down, 600kHz, 3.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T39	em	XC9225F396M	DC-DC-IC	PWM step-down, 600kHz, 3.9V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T39	en	XC9225C396M	DC-DC-IC	PWM step-down, 600kHz, 3.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T39	eo	XC9225H396M	DC-DC-IC	PWM step-down, 600kHz, 3.9V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T39	ep	XC9225G396M	DC-DC-IC	PWM step-down, 600kHz, 3.9V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T39	eq	XC9225E396M	DC-DC-IC	PWM step-down, 600kHz, 3.9V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T39	er	XC9225D396M	DC-DC-IC	PWM step-down, 600kHz, 3.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T39A	-	FC6209A392M	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T39A	-	ML6209A392M	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T39B	-	FC6209B392M	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T39B	-	ML6209B392M	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T39C	-	FC6209C392M	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T39C	-	ML6209C392M	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T39D	-	FC6209D392M	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T39D	-	ML6209D392M	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T3A	ef	XC9225A30CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3A	ei	XC9225B30CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3A	em	XC9225F30CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3A	en	XC9225C30CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3A	eo	XC9225H30CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3A	ep	XC9225G30CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3A	eq	XC9225E30CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3A	er	XC9225D30CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3AA	-	FC6209A30AM	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T3AA	-	ML6209A30AM	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T3AB	-	FC6209B30AM	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T3AB	-	ML6209B30AM	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T3AC	-	FC6209C30AM	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T3AC	-	ML6209C30AM	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T3AD	-	FC6209D30AM	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T3AD	-	ML6209D30AM	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T3B	ef	XC9225A31CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3B	ei	XC9225B31CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3B	em	XC9225F31CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3B	en	XC9225C31CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3B	eo	XC9225H31CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3B	ep	XC9225G31CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3B	eq	XC9225E31CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3B	er	XC9225D31CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3BA	-	FC6209A31AM	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T3BA	-	ML6209A31AM	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T3BB	-	FC6209B31AM	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T3BB	-	ML6209B31AM	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T3BC	-	FC6209C31AM	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T3BC	-	ML6209C31AM	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T3BD	-	FC6209D31AM	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T3BD	-	ML6209D31AM	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T3C	ef	XC9225A32CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3C	ei	XC9225B32CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3C	em	XC9225F32CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3C	en	XC9225C32CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3C	eo	XC9225H32CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3C	ep	XC9225G32CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3C	eq	XC9225E32CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3C	er	XC9225D32CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3CA	-	FC6209A32AM	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T3CA	-	ML6209A32AM	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T3CB	-	FC6209B32AM	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T3CB	-	ML6209B32AM	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T3CC	-	FC6209C32AM	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T3CC	-	ML6209C32AM	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T3CD	-	FC6209D32AM	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T3CD	-	ML6209D32AM	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T3D	ef	XC9225A33CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3D	ei	XC9225B33CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3D	em	XC9225F33CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3D	en	XC9225C33CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3D	eo	XC9225H33CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3D	ep	XC9225G33CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3D	eq	XC9225E33CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3D	er	XC9225D33CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3DA	-	FC6209A33AM	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T3DA	-	ML6209A33AM	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T3DB	-	FC6209B33AM	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T3DB	-	ML6209B33AM	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T3DC	-	FC6209C33AM	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T3DC	-	ML6209C33AM	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T3DD	-	FC6209D33AM	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T3DD	-	ML6209D33AM	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T3E	ef	XC9225A34CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3E	ei	XC9225B34CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3E	em	XC9225F34CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3E	en	XC9225C34CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3E	eo	XC9225H34CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T3E	ep	XC9225G34CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3E	eq	XC9225E34CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3E	er	XC9225D34CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3EA	-	FC6209A34AM	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T3EA	-	ML6209A34AM	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T3EB	-	FC6209B34AM	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T3EB	-	ML6209B34AM	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T3EC	-	FC6209C34AM	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T3EC	-	ML6209C34AM	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T3ED	-	FC6209D34AM	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T3ED	-	ML6209D34AM	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T3F	ef	XC9225A35CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3F	ei	XC9225B35CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3F	em	XC9225F35CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3F	en	XC9225C35CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3F	eo	XC9225H35CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3F	ep	XC9225G35CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3F	eq	XC9225E35CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3F	er	XC9225D35CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3FA	-	FC6209A35AM	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T3FA	-	ML6209A35AM	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T3FB	-	FC6209B35AM	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T3FB	-	ML6209B35AM	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T3FC	-	FC6209C35AM	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T3FC	-	ML6209C35AM	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T3FD	-	FC6209D35AM	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T3FD	-	ML6209D35AM	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T3GA	-	FC6209A36AM	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T3GA	-	ML6209A36AM	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T3GB	-	FC6209B36AM	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T3GB	-	ML6209B36AM	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T3GC	-	FC6209C36AM	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T3GC	-	ML6209C36AM	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T3GD	-	FC6209D36AM	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T3GD	-	ML6209D36AM	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T3H	ef	XC9225A36CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3H	ei	XC9225B36CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3H	em	XC9225F36CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3H	en	XC9225C36CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3H	eo	XC9225H36CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3H	ep	XC9225G36CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3H	eq	XC9225E36CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3H	er	XC9225D36CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3HA	-	FC6209A37AM	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T3HA	-	ML6209A37AM	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T3HB	-	FC6209B37AM	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T3HB	-	ML6209B37AM	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T3HC	-	FC6209C37AM	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T3HC	-	ML6209C37AM	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T3HD	-	FC6209D37AM	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T3HD	-	ML6209D37AM	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T3IA	-	FC6209A38AM	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T3IA	-	ML6209A38AM	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T3IB	-	FC6209B38AM	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T3IB	-	ML6209B38AM	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T3IC	-	FC6209C38AM	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T3IC	-	ML6209C38AM	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T3ID	-	FC6209D38AM	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T3ID	-	ML6209D38AM	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T3JA	-	FC6209A39AM	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T3JA	-	ML6209A39AM	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T3JB	-	FC6209B39AM	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T3JB	-	ML6209B39AM	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T3JC	-	FC6209C39AM	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T3JC	-	ML6209C39AM	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T3JD	-	FC6209D39AM	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T3JD	-	ML6209D39AM	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T3K	ef	XC9225A37CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3K	ei	XC9225B37CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3K	em	XC9225F37CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T3K	en	XC9225C37CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3K	eo	XC9225H37CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3K	ep	XC9225G37CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3K	eq	XC9225E37CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3K	er	XC9225D37CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3L	ef	XC9225A38CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3L	ei	XC9225B38CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3L	em	XC9225F38CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3L	en	XC9225C38CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3L	eo	XC9225H38CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3L	ep	XC9225G38CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3L	eq	XC9225E38CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3L	er	XC9225D38CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3M	ef	XC9225A39CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3M	ei	XC9225B39CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3M	em	XC9225F39CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T3M	en	XC9225C39CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3M	eo	XC9225H39CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3M	ep	XC9225G39CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T3M	eq	XC9225E39CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T3M	er	XC9225D39CM	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T3N	-	XC74UL02AAN	CMOS-Log	2-input NOR gate	SOT-25	28	Log2	6a	Tor
T3p	-	PZU3.3DB2	Z-diode	Dual, 3.25..3.5V, Izt=5mA, Zzt=95Ω, 250mW	SOT-353	28ds	-	6a	NxH
T3t	-	PZU3.3DB2	Z-diode	Dual, 3.25..3.5V, Izt=5mA, Zzt=95Ω, 250mW	SOT-353	28ds	-	6a	NxM
T3W	-	PZU3.3DB2	Z-diode	Dual, 3.25..3.5V, Izt=5mA, Zzt=95Ω, 250mW	SOT-353	28ds	-	6a	NxC
T4	-	BD45445G	Vdet-IC	4.4V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
T4	-	HD74LV1GT32ACM	CMOS-Log	2-input OR gate	CMPAK-5	28	Log4	6a	Ren
T4	-	HD74LV1GT32AVS	CMOS-Log	2-input OR gate	VSON-5	30	Log4	6a	Ren
T4	-	R1121N441B	LVR-IC	LDO, Low noise, 4.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
T4-	-	PZU3.6DB2	Z-diode	Dual, 3.55..3.8V, Izt=5mA, Zzt=90Ω, 250mW	SOT-353	28ds	-	6a	NxH
T40	-	R1162N401D	LVR-IC	LDO, 4.0V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T40	-	RP202N401D	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
T40	-	XC31BPN40AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4V±3%	SOT-25	28xa	VR4	6g	Tor
T40	ef	XC9225A406M	DC-DC-IC	PWM step-down, 600kHz, 4.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T40	eh	XC6383D401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T40	ei	XC9225B406M	DC-DC-IC	PWM step-down, 600kHz, 4.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T40	em	XC9225F406M	DC-DC-IC	PWM step-down, 600kHz, 4.0V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T40	en	XC9225C406M	DC-DC-IC	PWM step-down, 600kHz, 4.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T40	eo	XC9225H406M	DC-DC-IC	PWM step-down, 600kHz, 4.0V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T40	ep	XC9225G406M	DC-DC-IC	PWM step-down, 600kHz, 4.0V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T40	eq	XC9225E406M	DC-DC-IC	PWM step-down, 600kHz, 4.0V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T40	er	XC9225D406M	DC-DC-IC	PWM step-down, 600kHz, 4.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T40A	-	FC6209A402M	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T40A	-	ML6209A402M	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T40B	-	FC6209B402M	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T40B	-	ML6209B402M	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T40C	-	FC6209C402M	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T40C	-	ML6209C402M	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T40D	-	FC6209D402M	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T40D	-	ML6209D402M	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T41	-	R1162N181D5	LVR-IC	LDO, 1.85V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T41	-	XC31BPN41AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.1V±3%	SOT-25	28xa	VR4	6g	Tor
T41	eh	XC6383D411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T41A	-	FC6209A412M	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T41A	-	ML6209A412M	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T41B	-	FC6209B412M	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T41B	-	ML6209B412M	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T41C	-	FC6209C412M	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T41C	-	ML6209C412M	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T41D	-	FC6209D412M	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T41D	-	ML6209D412M	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T42	-	R1162N281D5	LVR-IC	LDO, 2.85V±2%, 350mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
T42	-	XC31BPN42AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.2V±3%	SOT-25	28xa	VR4	6g	Tor
T42	eh	XC6383D421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T42A	-	FC6209A422M	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T42A	-	ML6209A422M	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T42B	-	FC6209B422M	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T42B	-	ML6209B422M	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T42C	-	FC6209C422M	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T42C	-	ML6209C422M	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T42D	-	FC6209D422M	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T42D	-	ML6209D422M	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T43	-	XC31BPN43AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.3V±3%	SOT-25	28xa	VR4	6g	Tor
T43	eh	XC6383D431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T43A	-	FC6209A432M	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T43A	-	ML6209A432M	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T43B	-	FC6209B432M	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T43B	-	ML6209B432M	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T43C	-	FC6209C432M	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T43C	-	ML6209C432M	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T43D	-	FC6209D432M	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T43D	-	ML6209D432M	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T44	-	XC31BPN44AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.4V±3%	SOT-25	28xa	VR4	6g	Tor
T44	eh	XC6383D441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T44A	-	FC6209A442M	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T44A	-	ML6209A442M	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T44B	-	FC6209B442M	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T44B	-	ML6209B442M	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T44C	-	FC6209C442M	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T44C	-	ML6209C442M	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T44D	-	FC6209D442M	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T44D	-	ML6209D442M	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T45	-	XC31BPN45AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.5V±3%	SOT-25	28xa	VR4	6g	Tor
T45	eh	XC6383D451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T45A	-	FC6209A452M	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T45A	-	ML6209A452M	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T45B	-	FC6209B452M	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T45B	-	ML6209B452M	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T45C	-	FC6209C452M	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T45C	-	ML6209C452M	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T45D	-	FC6209D452M	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T45D	-	ML6209D452M	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T46	-	XC31BPN46AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.6V±3%	SOT-25	28xa	VR4	6g	Tor
T46	eh	XC6383D461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T46A	-	FC6209A462M	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T46A	-	ML6209A462M	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T46B	-	FC6209B462M	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T46B	-	ML6209B462M	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T46C	-	FC6209C462M	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T46C	-	ML6209C462M	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T46D	-	FC6209D462M	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T46D	-	ML6209D462M	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T47	-	XC31BPN47AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.7V±3%	SOT-25	28xa	VR4	6g	Tor
T47	eh	XC6383D471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T47A	-	FC6209A472M	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T47A	-	ML6209A472M	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T47B	-	FC6209B472M	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T47B	-	ML6209B472M	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T47C	-	FC6209C472M	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T47C	-	ML6209C472M	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T47D	-	FC6209D472M	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T47D	-	ML6209D472M	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T48	-	XC31BPN48AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.8V±3%	SOT-25	28xa	VR4	6g	Tor
T48	eh	XC6383D481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T48A	-	FC6209A482M	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T48A	-	ML6209A482M	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T48B	-	FC6209B482M	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T48B	-	ML6209B482M	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T48C	-	FC6209C482M	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T48C	-	ML6209C482M	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T48D	-	FC6209D482M	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T48D	-	ML6209D482M	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T49	-	XC31BPN49AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.9V±3%	SOT-25	28xa	VR4	6g	Tor
T49	eh	XC6383D491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T49A	-	FC6209A492M	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T49A	-	ML6209A492M	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T49B	-	FC6209B492M	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T49B	-	ML6209B492M	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T49C	-	FC6209C492M	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T49C	-	ML6209C492M	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T49D	-	FC6209D492M	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T49D	-	ML6209D492M	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T4A	ef	XC9225A40CM	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T4A	ei	XC9225B40CM	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T4A	em	XC9225F40CM	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
T4A	en	XC9225C40CM	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T4A	eo	XC9225H40CM	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T4A	ep	XC9225G40CM	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
T4A	eq	XC9225E40CM	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
T4A	er	XC9225D40CM	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
T4AA	-	FC6209A40AM	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T4AA	-	ML6209A40AM	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T4AB	-	FC6209B40AM	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T4AB	-	ML6209B40AM	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T4AC	-	FC6209C40AM	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T4AC	-	ML6209C40AM	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T4AD	-	FC6209D40AM	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T4AD	-	ML6209D40AM	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T4BA	-	FC6209A41AM	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T4BA	-	ML6209A41AM	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T4BB	-	FC6209B41AM	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T4BB	-	ML6209B41AM	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T4BC	-	FC6209C41AM	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T4BC	-	ML6209C41AM	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T4BD	-	FC6209D41AM	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T4BD	-	ML6209D41AM	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T4CA	-	FC6209A42AM	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T4CA	-	ML6209A42AM	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T4CB	-	FC6209B42AM	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T4CB	-	ML6209B42AM	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T4CC	-	FC6209C42AM	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T4CC	-	ML6209C42AM	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T4CD	-	FC6209D42AM	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T4CD	-	ML6209D42AM	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T4DA	-	FC6209A43AM	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T4DA	-	ML6209A43AM	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T4DB	-	FC6209B43AM	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T4DB	-	ML6209B43AM	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T4DC	-	FC6209C43AM	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T4DC	-	ML6209C43AM	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T4DD	-	FC6209D43AM	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T4DD	-	ML6209D43AM	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T4EA	-	FC6209A44AM	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T4EA	-	ML6209A44AM	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T4EB	-	FC6209B44AM	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T4EB	-	ML6209B44AM	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T4EC	-	FC6209C44AM	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T4EC	-	ML6209C44AM	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T4ED	-	FC6209D44AM	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T4ED	-	ML6209D44AM	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T4FA	-	FC6209A45AM	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T4FA	-	ML6209A45AM	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T4FB	-	FC6209B45AM	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T4FB	-	ML6209B45AM	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T4FC	-	FC6209C45AM	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T4FC	-	ML6209C45AM	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T4FD	-	FC6209D45AM	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T4FD	-	ML6209D45AM	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T4GA	-	FC6209A46AM	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T4GA	-	ML6209A46AM	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T4GB	-	FC6209B46AM	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T4GB	-	ML6209B46AM	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T4GC	-	FC6209C46AM	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T4GC	-	ML6209C46AM	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T4GD	-	FC6209D46AM	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T4GD	-	ML6209D46AM	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T4HA	-	FC6209A47AM	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T4HA	-	ML6209A47AM	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T4HB	-	FC6209B47AM	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T4HB	-	ML6209B47AM	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T4HC	-	FC6209C47AM	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T4HC	-	ML6209C47AM	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T4HD	-	FC6209D47AM	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T4HD	-	ML6209D47AM	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T4IA	-	FC6209A48AM	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T4IA	-	ML6209A48AM	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T4IB	-	FC6209B48AM	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T4IB	-	ML6209B48AM	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T4IC	-	FC6209C48AM	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T4IC	-	ML6209C48AM	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T4ID	-	FC6209D48AM	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T4ID	-	ML6209D48AM	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T4JA	-	FC6209A49AM	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T4JA	-	ML6209A49AM	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T4JB	-	FC6209B49AM	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T4JB	-	ML6209B49AM	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T4JC	-	FC6209C49AM	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T4JC	-	ML6209C49AM	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T4JD	-	FC6209D49AM	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T4JD	-	ML6209D49AM	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T4N	-	XC74UL32AAN	CMOS-Log	2-input OR gate	SOT-25	28	Log4	6a	Tor
T4p	-	PZU3.6DB2	Z-diode	Dual, 3.55..3.8V, Izt=5mA, Zzt=90Ω, 250mW	SOT-353	28ds	-	6a	NxH
T4t	-	PZU3.6DB2	Z-diode	Dual, 3.55..3.8V, Izt=5mA, Zzt=90Ω, 250mW	SOT-353	28ds	-	6a	NxM
T4W	-	PZU3.6DB2	Z-diode	Dual, 3.55..3.8V, Izt=5mA, Zzt=90Ω, 250mW	SOT-353	28ds	-	6a	NxC
T5	-	BD45435G	Vdet-IC	4.3V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
T5	-	HD74LV1GT04ACM	CMOS-Log	Inverter	CMPAK-5	28	Log6	6a	Ren
T5	-	HD74LV1GT04AVS	CMOS-Log	Inverter	VSON-5	30	Log6	6a	Ren
T5	-	R1121N451B	LVR-IC	LDO, Low noise, 4.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
T5-	-	PZU3.9DB2	Z-diode	Dual, 3.87..4.1V, Izt=5mA, Zzt=90Ω, 250mW	SOT-353	28ds	-	6a	NxH
T50	-	XC31BPN50AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5V±3%	SOT-25	28xa	VR4	6g	Tor
T50	eh	XC6383D501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T50A	-	FC6209A502M	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T50A	-	ML6209A502M	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T50B	-	FC6209B502M	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T50B	-	ML6209B502M	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T50C	-	FC6209C502M	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T50C	-	ML6209C502M	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T50D	-	FC6209D502M	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T50D	-	ML6209D502M	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T51	-	XC31BPN51AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.1V±3%	SOT-25	28xa	VR4	6g	Tor
T51	eh	XC6383D511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T51A	-	FC6209A512M	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T51A	-	ML6209A512M	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T51B	-	FC6209B512M	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T51B	-	ML6209B512M	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T51C	-	FC6209C512M	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T51C	-	ML6209C512M	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T51D	-	FC6209D512M	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T51D	-	ML6209D512M	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T52	-	XC31BPN52AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.2V±3%	SOT-25	28xa	VR4	6g	Tor
T52	eh	XC6383D521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T52A	-	FC6209A522M	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T52A	-	ML6209A522M	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T52B	-	FC6209B522M	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T52B	-	ML6209B522M	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T52C	-	FC6209C522M	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T52C	-	ML6209C522M	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T52D	-	FC6209D522M	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T52D	-	ML6209D522M	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T53	-	XC31BPN53AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.3V±3%	SOT-25	28xa	VR4	6g	Tor
T53	eh	XC6383D531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T53A	-	FC6209A532M	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T53A	-	ML6209A532M	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T53B	-	FC6209B532M	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T53B	-	ML6209B532M	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T53C	-	FC6209C532M	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T53C	-	ML6209C532M	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T53D	-	FC6209D532M	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T53D	-	ML6209D532M	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T54	-	XC31BPN54AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.4V±3%	SOT-25	28xa	VR4	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T54	eh	XC6383D541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T54A	-	FC6209A542M	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T54A	-	ML6209A542M	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T54B	-	FC6209B542M	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T54B	-	ML6209B542M	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T54C	-	FC6209C542M	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T54C	-	ML6209C542M	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T54D	-	FC6209D542M	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T54D	-	ML6209D542M	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T55	-	XC31BPN55AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.5V±3%	SOT-25	28xa	VR4	6g	Tor
T55	eh	XC6383D551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T55A	-	FC6209A552M	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T55A	-	ML6209A552M	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T55B	-	FC6209B552M	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T55B	-	ML6209B552M	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T55C	-	FC6209C552M	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T55C	-	ML6209C552M	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T55D	-	FC6209D552M	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T55D	-	ML6209D552M	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T56	-	XC31BPN56AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.6V±3%	SOT-25	28xa	VR4	6g	Tor
T56	eh	XC6383D561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T56A	-	FC6209A562M	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T56A	-	ML6209A562M	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T56B	-	FC6209B562M	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T56B	-	ML6209B562M	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T56C	-	FC6209C562M	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T56C	-	ML6209C562M	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T56D	-	FC6209D562M	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T56D	-	ML6209D562M	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T57	-	XC31BPN57AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.7V±3%	SOT-25	28xa	VR4	6g	Tor
T57	eh	XC6383D571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T57A	-	FC6209A572M	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T57A	-	ML6209A572M	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T57B	-	FC6209B572M	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T57B	-	ML6209B572M	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T57C	-	FC6209C572M	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T57C	-	ML6209C572M	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T57D	-	FC6209D572M	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T57D	-	ML6209D572M	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T58	-	XC31BPN58AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.8V±3%	SOT-25	28xa	VR4	6g	Tor
T58	eh	XC6383D581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T58A	-	FC6209A582M	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T58A	-	ML6209A582M	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T58B	-	FC6209B582M	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T58B	-	ML6209B582M	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T58C	-	FC6209C582M	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T58C	-	ML6209C582M	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T58D	-	FC6209D582M	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T58D	-	ML6209D582M	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T59	-	XC31BPN59AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.9V±3%	SOT-25	28xa	VR4	6g	Tor
T59	eh	XC6383D591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T59A	-	FC6209A592M	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T59A	-	ML6209A592M	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T59B	-	FC6209B592M	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T59B	-	ML6209B592M	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T59C	-	FC6209C592M	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T59C	-	ML6209C592M	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T59D	-	FC6209D592M	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T59D	-	ML6209D592M	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T5AA	-	FC6209A50AM	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T5AA	-	ML6209A50AM	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T5AB	-	FC6209B50AM	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T5AB	-	ML6209B50AM	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T5AC	-	FC6209C50AM	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T5AC	-	ML6209C50AM	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T5AD	-	FC6209D50AM	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T5AD	-	ML6209D50AM	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T5BA	-	FC6209A51AM	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T5BA	-	ML6209A51AM	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T5BB	-	FC6209B51AM	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T5BB	-	ML6209B51AM	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T5BC	-	FC6209C51AM	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T5BC	-	ML6209C51AM	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T5BD	-	FC6209D51AM	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T5BD	-	ML6209D51AM	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T5CA	-	FC6209A52AM	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T5CA	-	ML6209A52AM	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T5CB	-	FC6209B52AM	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T5CB	-	ML6209B52AM	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T5CC	-	FC6209C52AM	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T5CC	-	ML6209C52AM	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T5CD	-	FC6209D52AM	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T5CD	-	ML6209D52AM	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T5DA	-	FC6209A53AM	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T5DA	-	ML6209A53AM	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T5DB	-	FC6209B53AM	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T5DB	-	ML6209B53AM	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T5DC	-	FC6209C53AM	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T5DC	-	ML6209C53AM	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T5DD	-	FC6209D53AM	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T5DD	-	ML6209D53AM	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T5EA	-	FC6209A54AM	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T5EA	-	ML6209A54AM	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T5EB	-	FC6209B54AM	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T5EB	-	ML6209B54AM	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T5EC	-	FC6209C54AM	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T5EC	-	ML6209C54AM	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T5ED	-	FC6209D54AM	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T5ED	-	ML6209D54AM	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T5FA	-	FC6209A55AM	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T5FA	-	ML6209A55AM	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T5FB	-	FC6209B55AM	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T5FB	-	ML6209B55AM	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T5FC	-	FC6209C55AM	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T5FC	-	ML6209C55AM	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T5FD	-	FC6209D55AM	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T5FD	-	ML6209D55AM	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T5GA	-	FC6209A56AM	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T5GA	-	ML6209A56AM	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T5GB	-	FC6209B56AM	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T5GB	-	ML6209B56AM	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T5GC	-	FC6209C56AM	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T5GC	-	ML6209C56AM	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T5GD	-	FC6209D56AM	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T5GD	-	ML6209D56AM	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T5HA	-	FC6209A57AM	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T5HA	-	ML6209A57AM	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T5HB	-	FC6209B57AM	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T5HB	-	ML6209B57AM	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T5HC	-	FC6209C57AM	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T5HC	-	ML6209C57AM	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T5HD	-	FC6209D57AM	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T5HD	-	ML6209D57AM	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T5IA	-	FC6209A58AM	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T5IA	-	ML6209A58AM	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T5IB	-	FC6209B58AM	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T5IB	-	ML6209B58AM	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T5IC	-	FC6209C58AM	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T5IC	-	ML6209C58AM	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T5ID	-	FC6209D58AM	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T5ID	-	ML6209D58AM	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T5JA	-	FC6209A59AM	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T5JA	-	ML6209A59AM	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T5JB	-	FC6209B59AM	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T5JB	-	ML6209B59AM	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T5JC	-	FC6209C59AM	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T5JC	-	ML6209C59AM	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T5JD	-	FC6209D59AM	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T5JD	-	ML6209D59AM	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T5N	-	XC74UL04AAN	CMOS-Log	Inverter	SOT-25	28	Log6	6a	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T5p	-	PZU3.9DB2	Z-diode	Dual, 3.87..4.1V, Izt=5mA, Zzt=90Ω, 250mW	SOT-353	28ds	-	6a	NxH
T5t	-	PZU3.9DB2	Z-diode	Dual, 3.87..4.1V, Izt=5mA, Zzt=90Ω, 250mW	SOT-353	28ds	-	6a	NxM
T5W	-	PZU3.9DB2	Z-diode	Dual, 3.87..4.1V, Izt=5mA, Zzt=90Ω, 250mW	SOT-353	28ds	-	6a	NxC
T6	-	BD45425G	Vdet-IC	4.2V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
T6	-	R1121N461B	LVR-IC	LDO, Low noise, 4.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
T6-	-	PZU4.3DB2	Z-diode	Dual, 4.15..4.34V, Izt=5mA, Zzt=90Ω, 250mW	SOT-353	28ds	-	6a	NxH
T60	-	XC31BPN60AM	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=6V±3%	SOT-25	28xa	VR4	6g	Tor
T60	eh	XC6383D601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T60A	-	FC6209A602M	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Fis
T60A	-	ML6209A602M	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6a	Mlc
T60B	-	FC6209B602M	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Fis
T60B	-	ML6209B602M	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-23-5	28cx	VR4	6a	Mlc
T60C	-	FC6209C602M	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Fis
T60C	-	ML6209C602M	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PUR	SOT-23-5	28cx	VR4	6a	Mlc
T60D	-	FC6209D602M	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Fis
T60D	-	ML6209D602M	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-23-5	28cx	VR4	6a	Mlc
T61	eh	XC6383D611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T62	eh	XC6383D621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T63	eh	XC6383D631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T64	eh	XC6383D641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T65	eh	XC6383D651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T66	-	74HCT1G66GV	CMOS-Log	Single-pole single-throw analog switch	SOT753	28	Log16	6a	Nxp
T66	-	U74AHCT1G66-AF5	CMOS-Log	Single-pole single-throw analog switch	SOT-23-5	28	Log16	6a	Utc
T66	-	U74AHCT1G66-AL5	CMOS-Log	Single-pole single-throw analog switch	SOT-353	28	Log16	6a	Utc
T66	eh	XC6383D661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T66L	-	U74AHCT1G66L-AF5	CMOS-Log	Single-pole single-throw analog switch	SOT-23-5	28	Log16	6a	Utc
T66L	-	U74AHCT1G66L-AL5	CMOS-Log	Single-pole single-throw analog switch	SOT-353	28	Log16	6a	Utc
T67	eh	XC6383D671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T68	eh	XC6383D681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T69	eh	XC6383D691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T6A	-	S-1009C08I-M5T1U	Vdet-IC	0.8V±12mV, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6B	-	S-1009C09I-M5T1U	Vdet-IC	0.9V±12mV, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6C	-	S-1009C10I-M5T1U	Vdet-IC	1.0V±12mV, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6D	-	S-1009C11I-M5T1U	Vdet-IC	1.1V±12mV, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6E	-	S-1009C12I-M5T1U	Vdet-IC	1.2V±12mV, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6F	-	S-1009C13I-M5T1U	Vdet-IC	1.3V±12mV, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6G	-	S-1009C14I-M5T1U	Vdet-IC	1.4V±12mV, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6H	-	S-1009C15I-M5T1U	Vdet-IC	1.5V±12mV, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6I	-	S-1009C16I-M5T1U	Vdet-IC	1.6V±12mV, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6J	-	S-1009C17I-M5T1U	Vdet-IC	1.7V±12mV, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6K	-	S-1009C18I-M5T1U	Vdet-IC	1.8V±12mV, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6L	-	S-1009C19I-M5T1U	Vdet-IC	1.9V±12mV, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6M	-	S-1009C20I-M5T1U	Vdet-IC	2.0V±12mV, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6N	-	S-1009C21I-M5T1U	Vdet-IC	2.1V±12mV, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6N	-	XC74ULU04AN	CMOS-Log	Inverter	SOT-25	28	Log6	6a	Tor
T6O	-	S-1009C22I-M5T1U	Vdet-IC	2.2V±12mV, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6p	-	PZU4.3DB2	Z-diode	Dual, 4.15..4.34V, Izt=5mA, Zzt=90Ω, 250mW	SOT-353	28ds	-	6a	NxH
T6P	-	S-1009C23I-M5T1U	Vdet-IC	2.3V±12mV, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6Q	-	S-1009C24I-M5T1U	Vdet-IC	2.4V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6R	-	S-1009C25I-M5T1U	Vdet-IC	2.5V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6S	-	S-1009C26I-M5T1U	Vdet-IC	2.6V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6t	-	PZU4.3DB2	Z-diode	Dual, 4.15..4.34V, Izt=5mA, Zzt=90Ω, 250mW	SOT-353	28ds	-	6a	NxM
T6T	-	S-1009C27I-M5T1U	Vdet-IC	2.7V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6U	-	S-1009C28I-M5T1U	Vdet-IC	2.8V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6V	-	S-1009C29I-M5T1U	Vdet-IC	2.9V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6W	-	PZU4.3DB2	Z-diode	Dual, 4.15..4.34V, Izt=5mA, Zzt=90Ω, 250mW	SOT-353	28ds	-	6a	NxC
T6W	-	S-1009C30I-M5T1U	Vdet-IC	3.0V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6X	-	S-1009C31I-M5T1U	Vdet-IC	3.1V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6Y	-	S-1009C32I-M5T1U	Vdet-IC	3.2V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T6Z	-	S-1009C33I-M5T1U	Vdet-IC	3.3V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T7	-	BD45415G	Vdet-IC	4.1V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
T7	-	R1121N471B	LVR-IC	LDO, Low noise, 4.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
T7-	-	PZU4.7DB2	Z-diode	Dual, 4.55..4.75V, Izt=5mA, Zzt=80Ω, 250mW	SOT-353	28ds	-	6a	NxH
T70	eh	XC6383D701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-23-5	28sd	DC6	6g	Tor
T7A	-	S-1009C34I-M5T1U	Vdet-IC	3.4V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T7B	-	S-1009C35I-M5T1U	Vdet-IC	3.5V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T7C	-	S-1009C36I-M5T1U	Vdet-IC	3.6V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T7D	-	S-1009C37I-M5T1U	Vdet-IC	3.7V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T7E	-	S-1009C38I-M5T1U	Vdet-IC	3.8V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T7F	-	S-1009C39I-M5T1U	Vdet-IC	3.9V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T7G	-	S-1009C40I-M5T1U	Vdet-IC	4.0V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T7H	-	S-1009C41I-M5T1U	Vdet-IC	4.1V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T7I	-	S-1009C42I-M5T1U	Vdet-IC	4.2V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T7J	-	S-1009C43I-M5T1U	Vdet-IC	4.3V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T7K	-	S-1009C44I-M5T1U	Vdet-IC	4.4V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T7L	-	S-1009C45I-M5T1U	Vdet-IC	4.5V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T7M	-	S-1009C46I-M5T1U	Vdet-IC	4.6V±0.5%, -Reset PPO	SOT-23-5	28vdo	VD3	6g	Sii
T7p	-	PZU4.7DB2	Z-diode	Dual, 4.55..4.75V, Izt=5mA, Zzt=80Ω, 250mW	SOT-353	28ds	-	6a	NxH
T7t	-	PZU4.7DB2	Z-diode	Dual, 4.55..4.75V, Izt=5mA, Zzt=80Ω, 250mW	SOT-353	28ds	-	6a	NxM
T7W	-	PZU4.7DB2	Z-diode	Dual, 4.55..4.75V, Izt=5mA, Zzt=80Ω, 250mW	SOT-353	28ds	-	6a	NxC
T8	-	BD45405G	Vdet-IC	4.0V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
T8	-	HD74LV1GT86ACM	CMOS-Log	2-input EXCLUSIVE-OR gate	CMPAK-5	28	Log5	6a	Ren
T8	-	HD74LV1GT86AVS	CMOS-Log	2-input EXCLUSIVE-OR gate	VSON-5	30	Log5	6a	Ren
T8	-	R1121N481B	LVR-IC	LDO, Low noise, 4.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
T8-	-	PZU5.1DB2	Z-diode	Dual, 4.98..5.2V, Izt=5mA, Zzt=60Ω, 250mW	SOT-353	28ds	-	6a	NxH
T86	-	74HCT1G86GV	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT753	28	Log5	6a	Nxp
T86	-	NC7ST86P5	CMOS-Log	2-input EXCLUSIVE-OR gate	SC-70-5	28	Log5	6a	F
T86	-	U74AHCT1G86-AF5	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-23-5	28	Log5	6a	Utc
T86	-	U74AHCT1G86-AL5	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353	28	Log5	6a	Utc
T86L	-	U74AHCT1G86L-AF5	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-23-5	28	Log5	6a	Utc
T86L	-	U74AHCT1G86L-AL5	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353	28	Log5	6a	Utc
T8A	-	S-1009N08I-M5T1U	Vdet-IC	0.8V±12mV, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8A	-	XC6118N08AMR-G	Vdet-IC	0.8V±30mV, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
T8B	-	S-1009N09I-M5T1U	Vdet-IC	0.9V±12mV, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8B	-	XC6118N08BMR-G	Vdet-IC	0.8V±30mV, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
T8C	-	S-1009N10I-M5T1U	Vdet-IC	1.0V±12mV, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8C	-	XC6118N08CMR-G	Vdet-IC	0.8V±30mV, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
T8D	-	S-1009N11I-M5T1U	Vdet-IC	1.1V±12mV, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8D	-	XC6118N08DMR-G	Vdet-IC	0.8V±30mV, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
T8E	-	S-1009N12I-M5T1U	Vdet-IC	1.2V±12mV, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8F	-	S-1009N13I-M5T1U	Vdet-IC	1.3V±12mV, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8G	-	S-1009N14I-M5T1U	Vdet-IC	1.4V±12mV, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8H	-	S-1009N15I-M5T1U	Vdet-IC	1.5V±12mV, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8I	-	S-1009N16I-M5T1U	Vdet-IC	1.6V±12mV, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8J	-	S-1009N17I-M5T1U	Vdet-IC	1.7V±12mV, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8K	-	S-1009N18I-M5T1U	Vdet-IC	1.8V±12mV, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8L	-	S-1009N19I-M5T1U	Vdet-IC	1.9V±12mV, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8M	-	S-1009N20I-M5T1U	Vdet-IC	2.0V±12mV, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8N	-	S-1009N21I-M5T1U	Vdet-IC	2.1V±12mV, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8N	-	XC74UL86AAN	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-25	28	Log5	6a	Tor
T8O	-	S-1009N22I-M5T1U	Vdet-IC	2.2V±12mV, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8p	-	PZU5.1DB2	Z-diode	Dual, 4.98..5.2V, Izt=5mA, Zzt=60Ω, 250mW	SOT-353	28ds	-	6a	NxH
T8P	-	S-1009N23I-M5T1U	Vdet-IC	2.3V±12mV, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8Q	-	S-1009N24I-M5T1U	Vdet-IC	2.4V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8R	-	S-1009N25I-M5T1U	Vdet-IC	2.5V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8S	-	S-1009N26I-M5T1U	Vdet-IC	2.6V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8t	-	PZU5.1DB2	Z-diode	Dual, 4.98..5.2V, Izt=5mA, Zzt=60Ω, 250mW	SOT-353	28ds	-	6a	NxM
T8T	-	S-1009N27I-M5T1U	Vdet-IC	2.7V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8U	-	S-1009N28I-M5T1U	Vdet-IC	2.8V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8V	-	S-1009N29I-M5T1U	Vdet-IC	2.9V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8W	-	PZU5.1DB2	Z-diode	Dual, 4.98..5.2V, Izt=5mA, Zzt=60Ω, 250mW	SOT-353	28ds	-	6a	NxC
T8W	-	S-1009N30I-M5T1U	Vdet-IC	3.0V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8X	-	S-1009N31I-M5T1U	Vdet-IC	3.1V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8Y	-	S-1009N32I-M5T1U	Vdet-IC	3.2V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T8Z	-	S-1009N33I-M5T1U	Vdet-IC	3.3V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T9	-	BD45395G	Vdet-IC	3.9V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
T9	-	HD74LV1GT66ACM	CMOS-Log	Single-pole single-throw analog switch	CMPAK-5	28	Log16	6a	Ren
T9	-	HD74LV1GT66AVS	CMOS-Log	Single-pole single-throw analog switch	VSON-5	30	Log16	6a	Ren
T9	-	R1121N491B	LVR-IC	LDO, Low noise, 4.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
T9-	-	PZU5.6DB2	Z-diode	Dual, 5.49..5.73V, Izt=5mA, Zzt=40Ω, 250mW	SOT-353	28ds	-	6a	NxH
T9A	-	S-1009N34I-M5T1U	Vdet-IC	3.4V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T9A	-	XC6118N09AMR-G	Vdet-IC	0.9V±30mV, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
T9B	-	S-1009N35I-M5T1U	Vdet-IC	3.5V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T9B	-	XC6118N09BMR-G	Vdet-IC	0.9V±30mV, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
T9C	-	S-1009N36I-M5T1U	Vdet-IC	3.6V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T9C	-	XC6118N09CMR-G	Vdet-IC	0.9V±30mV, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
T9D	-	S-1009N37I-M5T1U	Vdet-IC	3.7V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T9D	-	XC6118N09DMR-G	Vdet-IC	0.9V±30mV, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
T9E	-	S-1009N38I-M5T1U	Vdet-IC	3.8V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T9F	-	S-1009N39I-M5T1U	Vdet-IC	3.9V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T9G	-	S-1009N40I-M5T1U	Vdet-IC	4.0V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T9H	-	S-1009N41I-M5T1U	Vdet-IC	4.1V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T9I	-	S-1009N42I-M5T1U	Vdet-IC	4.2V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T9J	-	S-1009N43I-M5T1U	Vdet-IC	4.3V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T9K	-	S-1009N44I-M5T1U	Vdet-IC	4.4V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T9L	-	S-1009N45I-M5T1U	Vdet-IC	4.5V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T9M	-	S-1009N46I-M5T1U	Vdet-IC	4.6V±0.5%, -Reset ODO	SOT-23-5	28vdo	VD1	6g	Sii
T9N	-	XC74UL4066M	CMOS-Log	Single-pole single-throw analog switch	SOT-25	28	Log16	6a	Tor
T9p	-	PZU5.6DB2	Z-diode	Dual, 5.49..5.73V, Izt=5mA, Zzt=40Ω, 250mW	SOT-353	28ds	-	6a	NxH
T9t	-	PZU5.6DB2	Z-diode	Dual, 5.49..5.73V, Izt=5mA, Zzt=40Ω, 250mW	SOT-353	28ds	-	6a	NxM
T9W	-	PZU5.6DB2	Z-diode	Dual, 5.49..5.73V, Izt=5mA, Zzt=40Ω, 250mW	SOT-353	28ds	-	6a	NxC
TA	-	74HCT1G00GW	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6a	Nxp
TA	-	BD45385G	Vdet-IC	3.8V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
TA	-	HD74LV1GT14ACM	CMOS-Log	Inverting Schmitt-trigger	CMPAK-5	28	Log7	6a	Ren
TA	-	HD74LV1GT14AVS	CMOS-Log	Inverting Schmitt-trigger	VSON-5	30	Log7	6a	Ren
TA	-	KIC7SZ00FU	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6a	Kec
TA-	-	PZU6.2DB2	Z-diode	Dual, 6.06..6.33V, Izt=5mA, Zzt=30Ω, 250mW	SOT-353	28ds	-	6a	NxH
TA9	ef	XC9225A0M6M	DC-DC-IC	PWM step-down, 600kHz, 0.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TA9	ei	XC9225B0M6M	DC-DC-IC	PWM step-down, 600kHz, 0.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TA9	en	XC9225C0M6M	DC-DC-IC	PWM step-down, 600kHz, 0.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TA9	er	XC9225D0M6M	DC-DC-IC	PWM step-down, 600kHz, 0.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TAA	-	NCV303LSN28T1	Vdet-IC	2.8V±1.5%, -Reset ODO	TSOP-5	28vdo	VD1	6k	Ons
TAA	-	R3118N301A	Vdet-IC	3.0V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAB	-	R3118N311A	Vdet-IC	3.1V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAC	-	R3118N321A	Vdet-IC	3.2V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAD	-	R3118N331A	Vdet-IC	3.3V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAE	-	R3118N341A	Vdet-IC	3.4V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAF	-	R3118N351A	Vdet-IC	3.5V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAG	-	R3118N361A	Vdet-IC	3.6V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAH	-	R3118N371A	Vdet-IC	3.7V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAJ	-	R3118N381A	Vdet-IC	3.8V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAK	-	R3118N391A	Vdet-IC	3.9V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAL	-	R3118N401A	Vdet-IC	4.0V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAM	-	R3118N411A	Vdet-IC	4.1V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAM	ef	XC9225A0MCM	DC-DC-IC	PWM step-down, 1.2MHz, 0.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TAM	ei	XC9225B0MCM	DC-DC-IC	PWM step-down, 1.2MHz, 0.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TAM	en	XC9225C0MCM	DC-DC-IC	PWM step-down, 1.2MHz, 0.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TAM	er	XC9225D0MCM	DC-DC-IC	PWM step-down, 1.2MHz, 0.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TAN	-	NCP301LSN24T1	Vdet-IC	2.4V±1.5%, -Reset ODO	TSOP-5	28vdm	VD6	6k	Ons
TAN	-	R3118N421A	Vdet-IC	4.2V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAN	-	XC74UL14AAN	CMOS-Log	Inverting Schmitt-trigger	SOT-25	28	Log7	6a	Tor
TAp	-	PZU6.2DB2	Z-diode	Dual, 6.06..6.33V, Izt=5mA, Zzt=30Ω, 250mW	SOT-353	28ds	-	6a	NxH
TAP	-	R3118N431A	Vdet-IC	4.3V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAQ	-	R3118N441A	Vdet-IC	4.4V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAR	-	R3118N451A	Vdet-IC	4.5V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAS	-	R3118N461A	Vdet-IC	4.6V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAt	-	PZU6.2DB2	Z-diode	Dual, 6.06..6.33V, Izt=5mA, Zzt=30Ω, 250mW	SOT-353	28ds	-	6a	NxM
TAT	-	R3118N471A	Vdet-IC	4.7V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAU	-	R3118N481A	Vdet-IC	4.8V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAV	-	R3118N491A	Vdet-IC	4.9V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TAW	-	PZU6.2DB2	Z-diode	Dual, 6.06..6.33V, Izt=5mA, Zzt=30Ω, 250mW	SOT-353	28ds	-	6a	NxC
TAW	-	R3118N501A	Vdet-IC	5.0V±1.5%, -Reset ODO, Sense	SOT-23-5	28z4	VD14	6g	Ric
TB	-	74HCT1G02GW	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6a	Nxp
TB	-	BD45375G	Vdet-IC	3.7V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
TB	-	HD74LV1GT125ACM	CMOS-Log	Bus buffer gate with 3-state output	CMPAK-5	28	Log14	6a	Ren
TB	-	HD74LV1GT125AVS	CMOS-Log	Bus buffer gate with 3-state output	VSON-5	30	Log14	6a	Ren
TB	-	KIC7SZ02FU	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6a	Kec
TB-	-	PZU6.8DB2	Z-diode	Dual, 6.65..6.93V, Izt=5mA, Zzt=20Ω, 250mW	SOT-353	28ds	-	6a	NxH
TB0	ef	XC9225A1A6M	DC-DC-IC	PWM step-down, 600kHz, 1.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TB0	ei	XC9225B1A6M	DC-DC-IC	PWM step-down, 600kHz, 1.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TB0	en	XC9225C1A6M	DC-DC-IC	PWM step-down, 600kHz, 1.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TB0	er	XC9225D1A6M	DC-DC-IC	PWM step-down, 600kHz, 1.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TB1	ef	XC9225A1B6M	DC-DC-IC	PWM step-down, 600kHz, 1.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TB1	ei	XC9225B1B6M	DC-DC-IC	PWM step-down, 600kHz, 1.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TB1	en	XC9225C1B6M	DC-DC-IC	PWM step-down, 600kHz, 1.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TB1	er	XC9225D1B6M	DC-DC-IC	PWM step-down, 600kHz, 1.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TB2	ef	XC9225A1C6M	DC-DC-IC	PWM step-down, 600kHz, 1.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TB2	ei	XC9225B1C6M	DC-DC-IC	PWM step-down, 600kHz, 1.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TB2	en	XC9225C1C6M	DC-DC-IC	PWM step-down, 600kHz, 1.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TB2	er	XC9225D1C6M	DC-DC-IC	PWM step-down, 600kHz, 1.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
TB3	ef	XC9225A1D6M	DC-DC-IC	PWM step-down, 600kHz, 1.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TB3	ei	XC9225B1D6M	DC-DC-IC	PWM step-down, 600kHz, 1.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TB3	en	XC9225C1D6M	DC-DC-IC	PWM step-down, 600kHz, 1.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TB3	er	XC9225D1D6M	DC-DC-IC	PWM step-down, 600kHz, 1.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TB4	ef	XC9225A1E6M	DC-DC-IC	PWM step-down, 600kHz, 1.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TB4	ei	XC9225B1E6M	DC-DC-IC	PWM step-down, 600kHz, 1.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TB4	en	XC9225C1E6M	DC-DC-IC	PWM step-down, 600kHz, 1.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TB4	er	XC9225D1E6M	DC-DC-IC	PWM step-down, 600kHz, 1.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TB5	ef	XC9225A1F6M	DC-DC-IC	PWM step-down, 600kHz, 1.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TB5	ei	XC9225B1F6M	DC-DC-IC	PWM step-down, 600kHz, 1.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TB5	en	XC9225C1F6M	DC-DC-IC	PWM step-down, 600kHz, 1.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TB5	er	XC9225D1F6M	DC-DC-IC	PWM step-down, 600kHz, 1.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TB6	ef	XC9225A1H6M	DC-DC-IC	PWM step-down, 600kHz, 1.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TB6	ei	XC9225B1H6M	DC-DC-IC	PWM step-down, 600kHz, 1.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TB6	en	XC9225C1H6M	DC-DC-IC	PWM step-down, 600kHz, 1.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TB6	er	XC9225D1H6M	DC-DC-IC	PWM step-down, 600kHz, 1.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TB7	ef	XC9225A1K6M	DC-DC-IC	PWM step-down, 600kHz, 1.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TB7	ei	XC9225B1K6M	DC-DC-IC	PWM step-down, 600kHz, 1.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TB7	en	XC9225C1K6M	DC-DC-IC	PWM step-down, 600kHz, 1.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TB7	er	XC9225D1K6M	DC-DC-IC	PWM step-down, 600kHz, 1.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TB8	ef	XC9225A1L6M	DC-DC-IC	PWM step-down, 600kHz, 1.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TB8	ei	XC9225B1L6M	DC-DC-IC	PWM step-down, 600kHz, 1.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TB8	en	XC9225C1L6M	DC-DC-IC	PWM step-down, 600kHz, 1.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TB8	er	XC9225D1L6M	DC-DC-IC	PWM step-down, 600kHz, 1.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TB9	ef	XC9225A1M6M	DC-DC-IC	PWM step-down, 600kHz, 1.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TB9	ei	XC9225B1M6M	DC-DC-IC	PWM step-down, 600kHz, 1.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TB9	en	XC9225C1M6M	DC-DC-IC	PWM step-down, 600kHz, 1.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TB9	er	XC9225D1M6M	DC-DC-IC	PWM step-down, 600kHz, 1.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TBA	-	R3118N301C	Vdet-IC	3.0V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBA	ef	XC9225A1ACM	DC-DC-IC	PWM step-down, 1.2MHz, 1.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TBA	ei	XC9225B1ACM	DC-DC-IC	PWM step-down, 1.2MHz, 1.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TBA	en	XC9225C1ACM	DC-DC-IC	PWM step-down, 1.2MHz, 1.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TBA	er	XC9225D1ACM	DC-DC-IC	PWM step-down, 1.2MHz, 1.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TBB	-	R3118N311C	Vdet-IC	3.1V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBB	ef	XC9225A1BCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TBB	ei	XC9225B1BCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TBB	en	XC9225C1BCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TBB	er	XC9225D1BCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TBC	-	R3118N321C	Vdet-IC	3.2V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBC	ef	XC9225A1CCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TBC	ei	XC9225B1CCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TBC	en	XC9225C1CCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TBC	er	XC9225D1CCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TBD	-	R3118N331C	Vdet-IC	3.3V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBD	ef	XC9225A1DCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TBD	ei	XC9225B1DCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TBD	en	XC9225C1DCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TBD	er	XC9225D1DCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TBE	-	R3118N341C	Vdet-IC	3.4V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBE	ef	XC9225A1ECM	DC-DC-IC	PWM step-down, 1.2MHz, 1.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TBE	ei	XC9225B1ECM	DC-DC-IC	PWM step-down, 1.2MHz, 1.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TBE	en	XC9225C1ECM	DC-DC-IC	PWM step-down, 1.2MHz, 1.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TBE	er	XC9225D1ECM	DC-DC-IC	PWM step-down, 1.2MHz, 1.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TBF	-	R3118N351C	Vdet-IC	3.5V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBF	ef	XC9225A1FCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TBF	ei	XC9225B1FCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TBF	en	XC9225C1FCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TBF	er	XC9225D1FCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TBG	-	R3118N361C	Vdet-IC	3.6V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBH	-	R3118N371C	Vdet-IC	3.7V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBH	ef	XC9225A1HCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TBH	ei	XC9225B1HCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TBH	en	XC9225C1HCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TBH	er	XC9225D1HCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TBJ	-	R3118N381C	Vdet-IC	3.8V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBK	-	R3118N391C	Vdet-IC	3.9V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBK	ef	XC9225A1KCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TBK	ei	XC9225B1KCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TBK	en	XC9225C1KCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TBK	er	XC9225D1KCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
TBL	-	R3118N401C	Vdet-IC	4.0V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBL	ef	XC9225A1LCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TBL	ei	XC9225B1LCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TBL	en	XC9225C1LCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TBL	er	XC9225D1LCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TBM	-	R3118N411C	Vdet-IC	4.1V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBM	ef	XC9225A1MCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TBM	ei	XC9225B1MCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TBM	en	XC9225C1MCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TBM	er	XC9225D1MCM	DC-DC-IC	PWM step-down, 1.2MHz, 1.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TBN	-	R3118N421C	Vdet-IC	4.2V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBp	-	PZU6.8DB2	Z-diode	Dual, 6.65..6.93V, Izt=5mA, Zzt=20Ω, 250mW	SOT-353	28ds	-	6a	NxH
TBP	-	R3118N431C	Vdet-IC	4.3V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBQ	-	R3118N441C	Vdet-IC	4.4V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBR	-	R3118N451C	Vdet-IC	4.5V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBS	-	R3118N461C	Vdet-IC	4.6V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBt	-	PZU6.8DB2	Z-diode	Dual, 6.65..6.93V, Izt=5mA, Zzt=20Ω, 250mW	SOT-353	28ds	-	6a	NxM
TBT	-	R3118N471C	Vdet-IC	4.7V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBU	-	R3118N481C	Vdet-IC	4.8V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBV	-	R3118N491C	Vdet-IC	4.9V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TBW	-	PZU6.8DB2	Z-diode	Dual, 6.65..6.93V, Izt=5mA, Zzt=20Ω, 250mW	SOT-353	28ds	-	6a	NxC
TBW	-	R3118N501C	Vdet-IC	5.0V±1.5%, -Reset PPO, Sense	SOT-23-5	28z4	VD15	6g	Ric
TC	-	74HCT1G04GW	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Nxp
TC	-	BD45365G	Vdet-IC	3.6V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
TC	-	HD74LV1GT126ACM	CMOS-Log	Bus buffer gate with 3-state output	CMPAK-5	28	Log13	6a	Ren
TC	-	HD74LV1GT126AVS	CMOS-Log	Bus buffer gate with 3-state output	VSON-5	30	Log13	6a	Ren
TC	-	KIC7SZ04FU	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Kec
TC	-	TC75S56F	Comp-IC	CMOS, Vcc=±3.5..±7V, Icc0=200μA, Iout=±35mA	SMV	28opf	OP1	6a	Tos
TC	-	TC75S56FE	Comp-IC	CMOS, Vcc=±3.5..±7V, Icc0=200μA, Iout=±35mA	ESV	30opf	OP1	6a	Tos
TC	-	TC75S56FU	Comp-IC	CMOS, Vcc=±3.5..±7V, Icc0=200μA, Iout=±35mA	USV	28opf	OP1	6a	Tos
TC-	-	PZU7.5DB2	Z-diode	Dual, 7.28..7.6V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxH
TC0	ef	XC9225A2A6M	DC-DC-IC	PWM step-down, 600kHz, 2.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TC0	ei	XC9225B2A6M	DC-DC-IC	PWM step-down, 600kHz, 2.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TC0	en	XC9225C2A6M	DC-DC-IC	PWM step-down, 600kHz, 2.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TC0	er	XC9225D2A6M	DC-DC-IC	PWM step-down, 600kHz, 2.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TC1	ef	XC9225A2B6M	DC-DC-IC	PWM step-down, 600kHz, 2.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TC1	ei	XC9225B2B6M	DC-DC-IC	PWM step-down, 600kHz, 2.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TC1	en	XC9225C2B6M	DC-DC-IC	PWM step-down, 600kHz, 2.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TC1	er	XC9225D2B6M	DC-DC-IC	PWM step-down, 600kHz, 2.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TC2	ef	XC9225A2C6M	DC-DC-IC	PWM step-down, 600kHz, 2.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TC2	ei	XC9225B2C6M	DC-DC-IC	PWM step-down, 600kHz, 2.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TC2	en	XC9225C2C6M	DC-DC-IC	PWM step-down, 600kHz, 2.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TC2	er	XC9225D2C6M	DC-DC-IC	PWM step-down, 600kHz, 2.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TC3	ef	XC9225A2D6M	DC-DC-IC	PWM step-down, 600kHz, 2.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TC3	ei	XC9225B2D6M	DC-DC-IC	PWM step-down, 600kHz, 2.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TC3	en	XC9225C2D6M	DC-DC-IC	PWM step-down, 600kHz, 2.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TC3	er	XC9225D2D6M	DC-DC-IC	PWM step-down, 600kHz, 2.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TC4	ef	XC9225A2E6M	DC-DC-IC	PWM step-down, 600kHz, 2.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TC4	ei	XC9225B2E6M	DC-DC-IC	PWM step-down, 600kHz, 2.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TC4	en	XC9225C2E6M	DC-DC-IC	PWM step-down, 600kHz, 2.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TC4	er	XC9225D2E6M	DC-DC-IC	PWM step-down, 600kHz, 2.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TC5	ef	XC9225A2F6M	DC-DC-IC	PWM step-down, 600kHz, 2.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TC5	ei	XC9225B2F6M	DC-DC-IC	PWM step-down, 600kHz, 2.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TC5	en	XC9225C2F6M	DC-DC-IC	PWM step-down, 600kHz, 2.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TC5	er	XC9225D2F6M	DC-DC-IC	PWM step-down, 600kHz, 2.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TC6	ef	XC9225A2H6M	DC-DC-IC	PWM step-down, 600kHz, 2.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TC6	ei	XC9225B2H6M	DC-DC-IC	PWM step-down, 600kHz, 2.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TC6	en	XC9225C2H6M	DC-DC-IC	PWM step-down, 600kHz, 2.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TC6	er	XC9225D2H6M	DC-DC-IC	PWM step-down, 600kHz, 2.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TC7	ef	XC9225A2K6M	DC-DC-IC	PWM step-down, 600kHz, 2.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TC7	ei	XC9225B2K6M	DC-DC-IC	PWM step-down, 600kHz, 2.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TC7	en	XC9225C2K6M	DC-DC-IC	PWM step-down, 600kHz, 2.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TC7	er	XC9225D2K6M	DC-DC-IC	PWM step-down, 600kHz, 2.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TC8	ef	XC9225A2L6M	DC-DC-IC	PWM step-down, 600kHz, 2.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TC8	ei	XC9225B2L6M	DC-DC-IC	PWM step-down, 600kHz, 2.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TC8	en	XC9225C2L6M	DC-DC-IC	PWM step-down, 600kHz, 2.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TC8	er	XC9225D2L6M	DC-DC-IC	PWM step-down, 600kHz, 2.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TC9	ef	XC9225A2M6M	DC-DC-IC	PWM step-down, 600kHz, 2.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TC9	ei	XC9225B2M6M	DC-DC-IC	PWM step-down, 600kHz, 2.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TC9	en	XC9225C2M6M	DC-DC-IC	PWM step-down, 600kHz, 2.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
TC9	er	XC9225D2M6M	DC-DC-IC	PWM step-down, 600kHz, 2.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TCA	ef	XC9225A2ACM	DC-DC-IC	PWM step-down, 1.2MHz, 2.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TCA	ei	XC9225B2ACM	DC-DC-IC	PWM step-down, 1.2MHz, 2.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TCA	en	XC9225C2ACM	DC-DC-IC	PWM step-down, 1.2MHz, 2.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TCA	er	XC9225D2ACM	DC-DC-IC	PWM step-down, 1.2MHz, 2.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TCB	ef	XC9225A2BCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TCB	ei	XC9225B2BCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TCB	en	XC9225C2BCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TCB	er	XC9225D2BCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TCC	ef	XC9225A2CCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TCC	ei	XC9225B2CCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TCC	en	XC9225C2CCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TCC	er	XC9225D2CCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TCD	ef	XC9225A2DCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TCD	ei	XC9225B2DCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TCD	en	XC9225C2DCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TCD	er	XC9225D2DCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TCE	ef	XC9225A2ECM	DC-DC-IC	PWM step-down, 1.2MHz, 2.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TCE	ei	XC9225B2ECM	DC-DC-IC	PWM step-down, 1.2MHz, 2.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TCE	en	XC9225C2ECM	DC-DC-IC	PWM step-down, 1.2MHz, 2.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TCE	er	XC9225D2ECM	DC-DC-IC	PWM step-down, 1.2MHz, 2.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TCF	ef	XC9225A2FCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TCF	ei	XC9225B2FCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TCF	en	XC9225C2FCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TCF	er	XC9225D2FCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TCH	ef	XC9225A2HCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TCH	ei	XC9225B2HCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TCH	en	XC9225C2HCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TCH	er	XC9225D2HCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TCK	ef	XC9225A2KCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TCK	ei	XC9225B2KCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TCK	en	XC9225C2KCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TCK	er	XC9225D2KCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TCL	ef	XC9225A2LCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TCL	ei	XC9225B2LCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TCL	en	XC9225C2LCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TCL	er	XC9225D2LCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TCM	ef	XC9225A2MCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TCM	ei	XC9225B2MCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TCM	en	XC9225C2MCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TCM	er	XC9225D2MCM	DC-DC-IC	PWM step-down, 1.2MHz, 2.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TCp	-	PZU7.5DB2	Z-diode	Dual, 7.28..7.6V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxH
TCt	-	PZU7.5DB2	Z-diode	Dual, 7.28..7.6V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxM
TCW	-	PZU7.5DB2	Z-diode	Dual, 7.28..7.6V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxC
TD	-	74HCT1GU04	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Nxp
TD	-	BD45355G	Vdet-IC	3.5V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
TD	-	KIC7SZ05FU	CMOS-Log	Inverter (ODO)	SOT-353	28	Log19	6a	Kec
TD	-	TC75S57F	Comp-IC	CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	SMV	28opf	OP1	6a	Tos
TD	-	TC75S57FE	Comp-IC	CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	ESV	30opf	OP1	6a	Tos
TD	-	TC75S57FU	Comp-IC	CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	USV	28opf	OP1	6a	Tos
TD-	-	PZU8.2DB2	Z-diode	Dual, 8.02..8.36V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxH
TD0	ef	XC9225A3A6M	DC-DC-IC	PWM step-down, 600kHz, 3.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD0	ei	XC9225B3A6M	DC-DC-IC	PWM step-down, 600kHz, 3.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD0	em	XC9225F3A6M	DC-DC-IC	PWM step-down, 600kHz, 3.05V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD0	en	XC9225C3A6M	DC-DC-IC	PWM step-down, 600kHz, 3.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD0	eo	XC9225H3A6M	DC-DC-IC	PWM step-down, 600kHz, 3.05V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD0	ep	XC9225G3A6M	DC-DC-IC	PWM step-down, 600kHz, 3.05V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD0	eq	XC9225E3A6M	DC-DC-IC	PWM step-down, 600kHz, 3.05V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD0	er	XC9225D3A6M	DC-DC-IC	PWM step-down, 600kHz, 3.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD1	ef	XC9225A3B6M	DC-DC-IC	PWM step-down, 600kHz, 3.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD1	ei	XC9225B3B6M	DC-DC-IC	PWM step-down, 600kHz, 3.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD1	em	XC9225F3B6M	DC-DC-IC	PWM step-down, 600kHz, 3.15V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD1	en	XC9225C3B6M	DC-DC-IC	PWM step-down, 600kHz, 3.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD1	eo	XC9225H3B6M	DC-DC-IC	PWM step-down, 600kHz, 3.15V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD1	ep	XC9225G3B6M	DC-DC-IC	PWM step-down, 600kHz, 3.15V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD1	eq	XC9225E3B6M	DC-DC-IC	PWM step-down, 600kHz, 3.15V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD1	er	XC9225D3B6M	DC-DC-IC	PWM step-down, 600kHz, 3.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD2	ef	XC9225A3C6M	DC-DC-IC	PWM step-down, 600kHz, 3.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD2	ei	XC9225B3C6M	DC-DC-IC	PWM step-down, 600kHz, 3.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD2	em	XC9225F3C6M	DC-DC-IC	PWM step-down, 600kHz, 3.25V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
TD2	en	XC9225C3C6M	DC-DC-IC	PWM step-down, 600kHz, 3.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD2	eo	XC9225H3C6M	DC-DC-IC	PWM step-down, 600kHz, 3.25V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD2	ep	XC9225G3C6M	DC-DC-IC	PWM step-down, 600kHz, 3.25V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD2	eq	XC9225E3C6M	DC-DC-IC	PWM step-down, 600kHz, 3.25V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD2	er	XC9225D3C6M	DC-DC-IC	PWM step-down, 600kHz, 3.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD3	ef	XC9225A3D6M	DC-DC-IC	PWM step-down, 600kHz, 3.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD3	ei	XC9225B3D6M	DC-DC-IC	PWM step-down, 600kHz, 3.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD3	em	XC9225F3D6M	DC-DC-IC	PWM step-down, 600kHz, 3.35V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD3	en	XC9225C3D6M	DC-DC-IC	PWM step-down, 600kHz, 3.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD3	eo	XC9225H3D6M	DC-DC-IC	PWM step-down, 600kHz, 3.35V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD3	ep	XC9225G3D6M	DC-DC-IC	PWM step-down, 600kHz, 3.35V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD3	eq	XC9225E3D6M	DC-DC-IC	PWM step-down, 600kHz, 3.35V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD3	er	XC9225D3D6M	DC-DC-IC	PWM step-down, 600kHz, 3.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD4	ef	XC9225A3E6M	DC-DC-IC	PWM step-down, 600kHz, 3.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD4	ei	XC9225B3E6M	DC-DC-IC	PWM step-down, 600kHz, 3.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD4	em	XC9225F3E6M	DC-DC-IC	PWM step-down, 600kHz, 3.45V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD4	en	XC9225C3E6M	DC-DC-IC	PWM step-down, 600kHz, 3.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD4	eo	XC9225H3E6M	DC-DC-IC	PWM step-down, 600kHz, 3.45V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD4	ep	XC9225G3E6M	DC-DC-IC	PWM step-down, 600kHz, 3.45V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD4	eq	XC9225E3E6M	DC-DC-IC	PWM step-down, 600kHz, 3.45V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD4	er	XC9225D3E6M	DC-DC-IC	PWM step-down, 600kHz, 3.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD5	ef	XC9225A3F6M	DC-DC-IC	PWM step-down, 600kHz, 3.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD5	ei	XC9225B3F6M	DC-DC-IC	PWM step-down, 600kHz, 3.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD5	em	XC9225F3F6M	DC-DC-IC	PWM step-down, 600kHz, 3.55V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD5	en	XC9225C3F6M	DC-DC-IC	PWM step-down, 600kHz, 3.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD5	eo	XC9225H3F6M	DC-DC-IC	PWM step-down, 600kHz, 3.55V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD5	ep	XC9225G3F6M	DC-DC-IC	PWM step-down, 600kHz, 3.55V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD5	eq	XC9225E3F6M	DC-DC-IC	PWM step-down, 600kHz, 3.55V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD5	er	XC9225D3F6M	DC-DC-IC	PWM step-down, 600kHz, 3.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD6	ef	XC9225A3H6M	DC-DC-IC	PWM step-down, 600kHz, 3.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD6	ei	XC9225B3H6M	DC-DC-IC	PWM step-down, 600kHz, 3.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD6	em	XC9225F3H6M	DC-DC-IC	PWM step-down, 600kHz, 3.65V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD6	en	XC9225C3H6M	DC-DC-IC	PWM step-down, 600kHz, 3.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD6	eo	XC9225H3H6M	DC-DC-IC	PWM step-down, 600kHz, 3.65V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD6	ep	XC9225G3H6M	DC-DC-IC	PWM step-down, 600kHz, 3.65V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD6	eq	XC9225E3H6M	DC-DC-IC	PWM step-down, 600kHz, 3.65V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD6	er	XC9225D3H6M	DC-DC-IC	PWM step-down, 600kHz, 3.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD7	ef	XC9225A3K6M	DC-DC-IC	PWM step-down, 600kHz, 3.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD7	ei	XC9225B3K6M	DC-DC-IC	PWM step-down, 600kHz, 3.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD7	em	XC9225F3K6M	DC-DC-IC	PWM step-down, 600kHz, 3.75V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD7	en	XC9225C3K6M	DC-DC-IC	PWM step-down, 600kHz, 3.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD7	eo	XC9225H3K6M	DC-DC-IC	PWM step-down, 600kHz, 3.75V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD7	ep	XC9225G3K6M	DC-DC-IC	PWM step-down, 600kHz, 3.75V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD7	eq	XC9225E3K6M	DC-DC-IC	PWM step-down, 600kHz, 3.75V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD7	er	XC9225D3K6M	DC-DC-IC	PWM step-down, 600kHz, 3.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD8	ef	XC9225A3L6M	DC-DC-IC	PWM step-down, 600kHz, 3.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD8	ei	XC9225B3L6M	DC-DC-IC	PWM step-down, 600kHz, 3.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD8	em	XC9225F3L6M	DC-DC-IC	PWM step-down, 600kHz, 3.85V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD8	en	XC9225C3L6M	DC-DC-IC	PWM step-down, 600kHz, 3.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD8	eo	XC9225H3L6M	DC-DC-IC	PWM step-down, 600kHz, 3.85V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD8	ep	XC9225G3L6M	DC-DC-IC	PWM step-down, 600kHz, 3.85V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD8	eq	XC9225E3L6M	DC-DC-IC	PWM step-down, 600kHz, 3.85V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD8	er	XC9225D3L6M	DC-DC-IC	PWM step-down, 600kHz, 3.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD9	ef	XC9225A3M6M	DC-DC-IC	PWM step-down, 600kHz, 3.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD9	ei	XC9225B3M6M	DC-DC-IC	PWM step-down, 600kHz, 3.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD9	em	XC9225F3M6M	DC-DC-IC	PWM step-down, 600kHz, 3.95V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TD9	en	XC9225C3M6M	DC-DC-IC	PWM step-down, 600kHz, 3.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD9	eo	XC9225H3M6M	DC-DC-IC	PWM step-down, 600kHz, 3.95V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TD9	ep	XC9225G3M6M	DC-DC-IC	PWM step-down, 600kHz, 3.95V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TD9	eq	XC9225E3M6M	DC-DC-IC	PWM step-down, 600kHz, 3.95V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TD9	er	XC9225D3M6M	DC-DC-IC	PWM step-down, 600kHz, 3.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDA	ef	XC9225A3ACM	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDA	ei	XC9225B3ACM	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDA	em	XC9225F3ACM	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDA	en	XC9225C3ACM	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDA	eo	XC9225H3ACM	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDA	ep	XC9225G3ACM	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDA	eq	XC9225E3ACM	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDA	er	XC9225D3ACM	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDB	ef	XC9225A3BCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
TDB	ei	XC9225B3BCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDB	em	XC9225F3BCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDB	en	XC9225C3BCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDB	eo	XC9225H3BCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDB	ep	XC9225G3BCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDB	eq	XC9225E3BCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDB	er	XC9225D3BCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDC	ef	XC9225A3CCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDC	ei	XC9225B3CCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDC	em	XC9225F3CCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDC	en	XC9225C3CCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDC	eo	XC9225H3CCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDC	ep	XC9225G3CCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDC	eq	XC9225E3CCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDC	er	XC9225D3CCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDD	ef	XC9225A3DCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDD	ei	XC9225B3DCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDD	em	XC9225F3DCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDD	en	XC9225C3DCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDD	eo	XC9225H3DCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDD	ep	XC9225G3DCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDD	eq	XC9225E3DCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDD	er	XC9225D3DCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDE	ef	XC9225A3ECM	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDE	ei	XC9225B3ECM	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDE	em	XC9225F3ECM	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDE	en	XC9225C3ECM	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDE	eo	XC9225H3ECM	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDE	ep	XC9225G3ECM	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDE	eq	XC9225E3ECM	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDE	er	XC9225D3ECM	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDF	ef	XC9225A3FCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDF	ei	XC9225B3FCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDF	em	XC9225F3FCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDF	en	XC9225C3FCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDF	eo	XC9225H3FCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDF	ep	XC9225G3FCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDF	eq	XC9225E3FCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDF	er	XC9225D3FCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDH	ef	XC9225A3HCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDH	ei	XC9225B3HCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDH	em	XC9225F3HCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDH	en	XC9225C3HCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDH	eo	XC9225H3HCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDH	ep	XC9225G3HCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDH	eq	XC9225E3HCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDH	er	XC9225D3HCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDK	ef	XC9225A3KCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDK	ei	XC9225B3KCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDK	em	XC9225F3KCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDK	en	XC9225C3KCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDK	eo	XC9225H3KCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDK	ep	XC9225G3KCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDK	eq	XC9225E3KCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDK	er	XC9225D3KCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDL	ef	XC9225A3LCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDL	ei	XC9225B3LCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDL	em	XC9225F3LCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDL	en	XC9225C3LCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDL	eo	XC9225H3LCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDL	ep	XC9225G3LCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDL	eq	XC9225E3LCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDL	er	XC9225D3LCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDM	ef	XC9225A3MCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
TDM	ei	XC9225B3MCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDM	em	XC9225F3MCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
TDM	en	XC9225C3MCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDM	eo	XC9225H3MCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDM	ep	XC9225G3MCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
TDM	eq	XC9225E3MCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
TDM	er	XC9225D3MCM	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
TDp	-	PZU8.2DB2	Z-diode	Dual, 8.02..8.36V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxH
TDt	-	PZU8.2DB2	Z-diode	Dual, 8.02..8.36V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxM
TDW	-	PZU8.2DB2	Z-diode	Dual, 8.02..8.36V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxC
TE	-	74HCT1G08GW	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Nxp
TE	-	BD45345G	Vdet-IC	3.4V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
TE	-	KIC7SZ08FU	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Kec
TE	-	TC75S58F	Comp-IC	CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	SMV	28opf	OP1	6a	Tos
TE	-	TC75S58FE	Comp-IC	CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	ESV	30opf	OP1	6a	Tos
TE	-	TC75S58FU	Comp-IC	CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	USV	28opf	OP1	6a	Tos
TE-	-	PZU9.1DB2	Z-diode	Dual, 8.85..9.23V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxH
TEp	-	PZU9.1DB2	Z-diode	Dual, 8.85..9.23V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxH
TEt	-	PZU9.1DB2	Z-diode	Dual, 8.85..9.23V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxM
TEW	-	PZU9.1DB2	Z-diode	Dual, 8.85..9.23V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxC
TF	-	74HCT1G14GW	CMOS-Log	Inverting Schmitt-trigger	SOT-353	28	Log7	6a	Nxp
TF	-	BD45335G	Vdet-IC	3.3V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
TF	-	KIC7SZ14FU	CMOS-Log	Inverting Schmitt-trigger	SOT-353	28	Log7	6a	Kec
TF	-	TC75S59F	Comp-IC	CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	SMV	28opf	OP1	6a	Tos
TF	-	TC75S59FE	Comp-IC	CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	ESV	30opf	OP1	6a	Tos
TF	-	TC75S59FU	Comp-IC	CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	USV	28opf	OP1	6a	Tos
TF-	-	PZU10DB2	Z-diode	Dual, 9.77..10.21V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxH
TF6	-	U74HC1G66-AF5	CMOS-Log	Single-pole single-throw analog switch	SOT-23-5	28	Log16	6a	Utc
TF6G	-	U74HC1G66G-AF5	CMOS-Log	Single-pole single-throw analog switch	SOT-23-5	28	Log16	6a	Utc
TF6L	-	U74HC1G66L-AF5	CMOS-Log	Single-pole single-throw analog switch	SOT-23-5	28	Log16	6a	Utc
TFp	-	PZU10DB2	Z-diode	Dual, 9.77..10.21V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxH
TFt	-	PZU10DB2	Z-diode	Dual, 9.77..10.21V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxM
TFW	-	PZU10DB2	Z-diode	Dual, 9.77..10.21V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxC
TG	-	74HCT1G32GW	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6a	Nxp
TG	-	BD45325G	Vdet-IC	3.2V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
TG	-	KIC7SZ32FU	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6a	Kec
TG-	-	PZU11DB2	Z-diode	Dual, 10.76..11.22V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxH
TGp	-	PZU11DB2	Z-diode	Dual, 10.76..11.22V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxH
TGt	-	PZU11DB2	Z-diode	Dual, 10.76..11.22V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxM
TGW	-	PZU11DB2	Z-diode	Dual, 10.76..11.22V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxC
TH	-	74HCT1G86GW	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353	28	Log5	6a	Nxp
TH	-	BD45315G	Vdet-IC	3.1V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
TH	-	KIC7SZ66FU	CMOS-Log	Single-pole single-throw analog switch	SOT-353	28	Log16	6a	Kec
TH-	-	PZU12DB2	Z-diode	Dual, 11.74..12.24V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxH
THp	-	PZU12DB2	Z-diode	Dual, 11.74..12.24V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxH
THt	-	PZU12DB2	Z-diode	Dual, 11.74..12.24V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxM
THW	-	PZU12DB2	Z-diode	Dual, 11.74..12.24V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxC
TJ	-	BD45305G	Vdet-IC	3.0V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
TJ	-	KIC7SZ86FU	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353	28	Log5	6a	Kec
TK	-	BD45295G	Vdet-IC	2.9V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
TK	-	KIC7SZ125FU	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log14	6a	Kec
TK-	-	PZU13DB2	Z-diode	Dual, 12.91..13.49V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxH
TKp	-	PZU13DB2	Z-diode	Dual, 12.91..13.49V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxH
TKt	-	PZU13DB2	Z-diode	Dual, 12.91..13.49V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxM
TKW	-	PZU13DB2	Z-diode	Dual, 12.91..13.49V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxC
TL	-	74HCT1G66GW	CMOS-Log	Single-pole single-throw analog switch	SOT-353	28	Log16	6a	Nxp
TL	-	BD45285G	Vdet-IC	2.8V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
TL	-	KIC7SZ126FU	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log13	6a	Kec
TL	-	R1122N401B	LVR-IC	LDO, Low noise, 4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
TL-	-	PZU14DB2	Z-diode	Dual, 13.7..14.3V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxH
TLp	-	PZU14DB2	Z-diode	Dual, 13.7..14.3V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxH
TLt	-	PZU14DB2	Z-diode	Dual, 13.7..14.3V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxM
TLW	-	PZU14DB2	Z-diode	Dual, 13.7..14.3V, Izt=5mA, Zzt=10Ω, 250mW	SOT-353	28ds	-	6a	NxC
TM	-	74HCT1G125GW	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log14	6a	Nxp
TM	-	BD45275G	Vdet-IC	2.7V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
TM	-	R1122N411B	LVR-IC	LDO, Low noise, 4.1V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
TM-	-	PZU15DB2	Z-diode	Dual, 14.34..14.98V, Izt=5mA, Zzt=15Ω, 250mW	SOT-353	28ds	-	6a	NxH
TMp	-	PZU15DB2	Z-diode	Dual, 14.34..14.98V, Izt=5mA, Zzt=15Ω, 250mW	SOT-353	28ds	-	6a	NxH
TMt	-	PZU15DB2	Z-diode	Dual, 14.34..14.98V, Izt=5mA, Zzt=15Ω, 250mW	SOT-353	28ds	-	6a	NxM
TMW	-	PZU15DB2	Z-diode	Dual, 14.34..14.98V, Izt=5mA, Zzt=15Ω, 250mW	SOT-353	28ds	-	6a	NxC
TN	-	74HCT1G126GW	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log13	6a	Nxp
TN	-	BD45265G	Vdet-IC	2.6V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
TN	-	KIC7SZ38FU	CMOS-Log	2-input NAND gate (ODO)	SOT-353	28	Log17	6a	Kec
TN	-	KIC7SZU04FU	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Kec
TN	-	R1122N421B	LVR-IC	LDO, Low noise, 4.2V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
TN-	-	PZU16DB2	Z-diode	Dual, 15.85..16.51V, Izt=5mA, Zzt=20Ω, 250mW	SOT-353	28ds	-	6a	NxH

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
TNp	-	PZU16DB2	Z-diode	Dual, 15.85..16.51V, Izt=5mA, Zzt=20Ω, 250mW	SOT-353	28ds	-	6a	NxH
TNt	-	PZU16DB2	Z-diode	Dual, 15.85..16.51V, Izt=5mA, Zzt=20Ω, 250mW	SOT-353	28ds	-	6a	NxM
TNW	-	PZU16DB2	Z-diode	Dual, 15.85..16.51V, Izt=5mA, Zzt=20Ω, 250mW	SOT-353	28ds	-	6a	NxC
TP	-	BD45255G	Vdet-IC	2.5V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
TP	-	R1122N431B	LVR-IC	LDO, Low noise, 4.3V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
TP-	-	PZU18DB2	Z-diode	Dual, 17.56..18.35V, Izt=5mA, Zzt=20Ω, 250mW	SOT-353	28ds	-	6a	NxH
TPp	-	PZU18DB2	Z-diode	Dual, 17.56..18.35V, Izt=5mA, Zzt=20Ω, 250mW	SOT-353	28ds	-	6a	NxH
TPt	-	PZU18DB2	Z-diode	Dual, 17.56..18.35V, Izt=5mA, Zzt=20Ω, 250mW	SOT-353	28ds	-	6a	NxM
TPW	-	PZU18DB2	Z-diode	Dual, 17.56..18.35V, Izt=5mA, Zzt=20Ω, 250mW	SOT-353	28ds	-	6a	NxC
TQ	-	BD45245G	Vdet-IC	2.4V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
TQ	-	R1122N441B	LVR-IC	LDO, Low noise, 4.4V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
TR	-	BD45235G	Vdet-IC	2.3V±1%, -MR, -Reset ODO, 500ms	SSOP-5	28vdp	VD4	6c	Rhm
TR	-	R1122N451B	LVR-IC	LDO, Low noise, 4.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
TR-	-	PZU20DB2	Z-diode	Dual, 19.52..20.39V, Izt=5mA, Zzt=20Ω, 250mW	SOT-353	28ds	-	6a	NxH
TRp	-	PZU20DB2	Z-diode	Dual, 19.52..20.39V, Izt=5mA, Zzt=20Ω, 250mW	SOT-353	28ds	-	6a	NxH
TRt	-	PZU20DB2	Z-diode	Dual, 19.52..20.39V, Izt=5mA, Zzt=20Ω, 250mW	SOT-353	28ds	-	6a	NxM
TRW	-	PZU20DB2	Z-diode	Dual, 19.52..20.39V, Izt=5mA, Zzt=20Ω, 250mW	SOT-353	28ds	-	6a	NxC
TS	-	BD45481G	Vdet-IC	4.8V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
TS	-	R1122N461B	LVR-IC	LDO, Low noise, 4.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
TS-	-	PZU22DB2	Z-diode	Dual, 21.54..22.47V, Izt=5mA, Zzt=25Ω, 250mW	SOT-353	28ds	-	6a	NxH
TSp	-	PZU22DB2	Z-diode	Dual, 21.54..22.47V, Izt=5mA, Zzt=25Ω, 250mW	SOT-353	28ds	-	6a	NxH
TSt	-	PZU22DB2	Z-diode	Dual, 21.54..22.47V, Izt=5mA, Zzt=25Ω, 250mW	SOT-353	28ds	-	6a	NxM
TSW	-	PZU22DB2	Z-diode	Dual, 21.54..22.47V, Izt=5mA, Zzt=25Ω, 250mW	SOT-353	28ds	-	6a	NxC
TT	-	BD45471G	Vdet-IC	4.7V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
TT	-	R1122N471B	LVR-IC	LDO, Low noise, 4.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
TT-	-	PZU24DB2	Z-diode	Dual, 23.72..24.78V, Izt=5mA, Zzt=30Ω, 250mW	SOT-353	28ds	-	6a	NxH
TTp	-	PZU24DB2	Z-diode	Dual, 23.72..24.78V, Izt=5mA, Zzt=30Ω, 250mW	SOT-353	28ds	-	6a	NxH
TTt	-	PZU24DB2	Z-diode	Dual, 23.72..24.78V, Izt=5mA, Zzt=30Ω, 250mW	SOT-353	28ds	-	6a	NxM
TTW	-	PZU24DB2	Z-diode	Dual, 23.72..24.78V, Izt=5mA, Zzt=30Ω, 250mW	SOT-353	28ds	-	6a	NxC
TU	-	BD45461G	Vdet-IC	4.6V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
TU	-	R1122N481B	LVR-IC	LDO, Low noise, 4.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
TV	-	BD45451G	Vdet-IC	4.5V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
TV	-	R1122N491B	LVR-IC	LDO, Low noise, 4.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
TVA	-	S-11L10B08-M5T1U	LVR-IC	LDO, 0.8V±15mV, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVB	-	S-11L10B09-M5T1U	LVR-IC	LDO, 0.9V±15mV, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVC	-	S-11L10B10-M5T1U	LVR-IC	LDO, 1.0V±15mV, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVD	-	S-11L10B11-M5T1U	LVR-IC	LDO, 1.1V±15mV, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVE	-	S-11L10B12-M5T1U	LVR-IC	LDO, 1.2V±15mV, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVF	-	S-11L10B13-M5T1U	LVR-IC	LDO, 1.3V±15mV, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVG	-	S-11L10B14-M5T1U	LVR-IC	LDO, 1.4V±15mV, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVH	-	S-11L10B15-M5T1U	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVI	-	S-11L10B16-M5T1U	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVJ	-	S-11L10B17-M5T1U	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVK	-	S-11L10B18-M5T1U	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVL	-	S-11L10B19-M5T1U	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVM	-	S-11L10B20-M5T1U	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVN	-	S-11L10B21-M5T1U	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVO	-	S-11L10B22-M5T1U	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVP	-	S-11L10B23-M5T1U	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVQ	-	S-11L10B24-M5T1U	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVR	-	S-11L10B25-M5T1U	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVS	-	S-11L10B26-M5T1U	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVT	-	S-11L10B27-M5T1U	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVU	-	S-11L10B28-M5T1U	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVV	-	S-11L10B29-M5T1U	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVW	-	S-11L10B30-M5T1U	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVX	-	S-11L10B31-M5T1U	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVY	-	S-11L10B32-M5T1U	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TVZ	-	S-11L10B33-M5T1U	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
TW	-	BD45441G	Vdet-IC	4.4V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
TX	-	BD45431G	Vdet-IC	4.3V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
TXA	-	S-11L10D08-M5T1U	LVR-IC	LDO, 0.8V±15mV, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXB	-	S-11L10D09-M5T1U	LVR-IC	LDO, 0.9V±15mV, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXC	-	S-11L10D10-M5T1U	LVR-IC	LDO, 1.0V±15mV, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXD	-	S-11L10D11-M5T1U	LVR-IC	LDO, 1.1V±15mV, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXE	-	S-11L10D12-M5T1U	LVR-IC	LDO, 1.2V±15mV, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXF	-	S-11L10D13-M5T1U	LVR-IC	LDO, 1.3V±15mV, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXG	-	S-11L10D14-M5T1U	LVR-IC	LDO, 1.4V±15mV, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXH	-	S-11L10D15-M5T1U	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXI	-	S-11L10D16-M5T1U	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
TXJ	-	S-11L10D17-M5T1U	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXK	-	S-11L10D18-M5T1U	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXL	-	S-11L10D19-M5T1U	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXM	-	S-11L10D20-M5T1U	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXN	-	S-11L10D21-M5T1U	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXO	-	S-11L10D22-M5T1U	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXP	-	S-11L10D23-M5T1U	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXQ	-	S-11L10D24-M5T1U	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXR	-	S-11L10D25-M5T1U	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXS	-	S-11L10D26-M5T1U	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXT	-	S-11L10D27-M5T1U	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXU	-	S-11L10D28-M5T1U	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXV	-	S-11L10D29-M5T1U	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXW	-	S-11L10D30-M5T1U	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXX	-	S-11L10D31-M5T1U	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXY	-	S-11L10D32-M5T1U	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TXZ	-	S-11L10D33-M5T1U	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
TY	-	BD45421G	Vdet-IC	4.2V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
TZ	-	BD45411G	Vdet-IC	4.1V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
U0	-	BD45401G	Vdet-IC	4.0V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
U0	-	R1121N501B	LVR-IC	LDO, Low noise, 5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
U0	-	TC74A0-5.0VCT	Tdet-IC	Sensor (-40..+125±3°C), Vcc=5V, I2C-bus	SOT-23-5	28hd	-	6g	Mcc
U00	-	SN74AUC1G00DBV	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6g	Ti
U001	-	R3111Q222A5	Vdet-IC	2.25V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U009	-	R3111Q092A	Vdet-IC	0.9V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U010	-	R3111Q102A	Vdet-IC	1.0V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U011	-	R3111Q112A	Vdet-IC	1.1V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U012	-	R3111Q122A	Vdet-IC	1.2V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U013	-	R3111Q132A	Vdet-IC	1.3V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U014	-	R3111Q142A	Vdet-IC	1.4V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U015	-	R3111Q152A	Vdet-IC	1.5V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U016	-	R3111Q162A	Vdet-IC	1.6V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U017	-	R3111Q172A	Vdet-IC	1.7V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U018	-	R3111Q182A	Vdet-IC	1.8V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U019	-	R3111Q192A	Vdet-IC	1.9V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U020	-	R3111Q202A	Vdet-IC	2.0V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U021	-	R3111Q212A	Vdet-IC	2.1V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U022	-	R3111Q222A	Vdet-IC	2.2V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U023	-	R3111Q232A	Vdet-IC	2.3V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U024	-	R3111Q242A	Vdet-IC	2.4V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U025	-	R3111Q252A	Vdet-IC	2.5V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U026	-	R3111Q262A	Vdet-IC	2.6V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U027	-	R3111Q272A	Vdet-IC	2.7V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U028	-	R3111Q282A	Vdet-IC	2.8V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U029	-	R3111Q292A	Vdet-IC	2.9V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U030	-	R3111Q302A	Vdet-IC	3.0V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U031	-	R3111Q312A	Vdet-IC	3.1V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U032	-	R3111Q322A	Vdet-IC	3.2V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U033	-	R3111Q332A	Vdet-IC	3.3V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U034	-	R3111Q342A	Vdet-IC	3.4V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U035	-	R3111Q352A	Vdet-IC	3.5V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U036	-	R3111Q362A	Vdet-IC	3.6V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U037	-	R3111Q372A	Vdet-IC	3.7V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U038	-	R3111Q382A	Vdet-IC	3.8V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U039	-	R3111Q392A	Vdet-IC	3.9V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U040	-	R3111Q402A	Vdet-IC	4.0V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U041	-	R3111Q412A	Vdet-IC	4.1V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U042	-	R3111Q422A	Vdet-IC	4.2V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U043	-	R3111Q432A	Vdet-IC	4.3V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U044	-	R3111Q442A	Vdet-IC	4.4V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U045	-	R3111Q452A	Vdet-IC	4.5V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U046	-	R3111Q462A	Vdet-IC	4.6V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U047	-	R3111Q472A	Vdet-IC	4.7V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U048	-	R3111Q482A	Vdet-IC	4.8V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U049	-	R3111Q492A	Vdet-IC	4.9V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U050	-	R3111Q502A	Vdet-IC	5.0V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U051	-	R3111Q512A	Vdet-IC	5.1V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U052	-	R3111Q522A	Vdet-IC	5.2V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U053	-	R3111Q532A	Vdet-IC	5.3V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U054	-	R3111Q542A	Vdet-IC	5.4V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U055	-	R3111Q552A	Vdet-IC	5.5V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U056	-	R3111Q562A	Vdet-IC	5.6V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U057	-	R3111Q572A	Vdet-IC	5.7V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U058	-	R3111Q582A	Vdet-IC	5.8V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U059	-	R3111Q592A	Vdet-IC	5.9V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U060	-	R3111Q602A	Vdet-IC	6.0V±2%, -Reset PPO	SC-88A	28ru	VD7	6ma	Ric
U09	ef	XC9226A096M	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U09	ei	XC9226B096M	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U09	en	XC9226C096M	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U09	er	XC9226D096M	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U0A	-	R3134N46EA3	Vdet-IC	4.63V±1.8%, -Reset ODO, -MR	SOT-23-5	28z7	VD4	6g	Ric
U0A	-	XC6118N10AMR-G	Vdet-IC	1.0V±30mV, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
U0B	-	XC6118N10BMR-G	Vdet-IC	1.0V±30mV, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
U0C	-	XC6118N10CMR-G	Vdet-IC	1.0V±30mV, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
U0D	-	XC6118N10DMR-G	Vdet-IC	1.0V±30mV, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
U0M	ef	XC9226A09CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U0M	ei	XC9226B09CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U0M	en	XC9226C09CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U0M	er	XC9226D09CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U1	-	BD45391G	Vdet-IC	3.9V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
U1	-	TC74A1-5.0VCT	Tdet-IC	Sensor (-40..+125±3°C), Vcc=5V, I2C-bus	SOT-23-5	28hd	-	6g	Mcc
U1-	-	PZU2.7DB2/DG	Z-diode	Dual, 2.65..2.9V, Izt=5mA, Zzt=100Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U10	ef	XC9226A106M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U10	ei	XC9226B106M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U10	en	XC9226C106M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U10	er	XC9226D106M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U11	ef	XC9226A116M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U11	ei	XC9226B116M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U11	en	XC9226C116M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U11	er	XC9226D116M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U12	ef	XC9226A126M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U12	ei	XC9226B126M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U12	en	XC9226C126M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U12	er	XC9226D126M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U13	ef	XC9226A136M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U13	ei	XC9226B136M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U13	en	XC9226C136M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U13	er	XC9226D136M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U14	-	SN74AUC1G14DBV	CMOS-Log	Inverting Schmitt-trigger	SOT-23-5	28	Log7	6g	Ti
U14	ef	XC9226A146M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U14	ei	XC9226B146M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U14	en	XC9226C146M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U14	er	XC9226D146M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U15	ef	XC9226A156M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U15	ei	XC9226B156M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U15	en	XC9226C156M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U15	er	XC9226D156M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U16	ef	XC9226A166M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U16	ei	XC9226B166M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U16	en	XC9226C166M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U16	er	XC9226D166M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U17	-	SN74AUC1G17DBV	CMOS-Log	Schmitt-trigger	SOT-23-5	28	Log11	6g	Ti
U17	ef	XC9226A176M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U17	ei	XC9226B176M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U17	en	XC9226C176M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U17	er	XC9226D176M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U18	ef	XC9226A186M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U18	ei	XC9226B186M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U18	en	XC9226C186M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U18	er	XC9226D186M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U19	ef	XC9226A196M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U19	ei	XC9226B196M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U19	en	XC9226C196M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U19	er	XC9226D196M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U1A	-	R3134N46EC3	Vdet-IC	4.63V±1.8%, -Reset PPO, -MR	SOT-23-5	28z7	VD5	6g	Ric
U1A	-	XC6118N11AMR-G	Vdet-IC	1.1V±30mV, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
U1A	ef	XC9226A10CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U1A	ei	XC9226B10CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U1A	en	XC9226C10CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U1A	er	XC9226D10CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U1B	-	XC6118N11BMR-G	Vdet-IC	1.1V±30mV, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
U1B	ef	XC9226A11CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U1B	ei	XC9226B11CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U1B	en	XC9226C11CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U1B	er	XC9226D11CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U1C	-	XC6118N11CMR-G	Vdet-IC	1.1V±30mV, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
U1C	ef	XC9226A12CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U1C	ei	XC9226B12CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U1C	en	XC9226C12CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U1C	er	XC9226D12CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U1D	-	XC6118N11DMR-G	Vdet-IC	1.1V±30mV, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
U1D	ef	XC9226A13CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U1D	ei	XC9226B13CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U1D	en	XC9226C13CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U1D	er	XC9226D13CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U1E	ef	XC9226A14CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U1E	ei	XC9226B14CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U1E	en	XC9226C14CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U1E	er	XC9226D14CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U1F	ef	XC9226A15CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U1F	ei	XC9226B15CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U1F	en	XC9226C15CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U1F	er	XC9226D15CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U1H	ef	XC9226A16CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U1H	ei	XC9226B16CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U1H	en	XC9226C16CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U1H	er	XC9226D16CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U1K	ef	XC9226A17CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U1K	ei	XC9226B17CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U1K	en	XC9226C17CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U1K	er	XC9226D17CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U1L	ef	XC9226A18CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U1L	ei	XC9226B18CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U1L	en	XC9226C18CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U1L	er	XC9226D18CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U1M	ef	XC9226A19CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U1M	ei	XC9226B19CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U1M	en	XC9226C19CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U1M	er	XC9226D19CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U1p	-	PZU2.7DB2/DG	Z-diode	Dual, 2.65..2.9V, Izt=5mA, Zzt=100Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U1t	-	PZU2.7DB2/DG	Z-diode	Dual, 2.65..2.9V, Izt=5mA, Zzt=100Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
U1W	-	PZU2.7DB2/DG	Z-diode	Dual, 2.65..2.9V, Izt=5mA, Zzt=100Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
U2	-	AX6608-12B	LVR-IC	LDO, 1.2V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
U2	-	BD45381G	Vdet-IC	3.8V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
U2	-	TC74A2-5.0VCT	Tdet-IC	Sensor (-40..+125±3°C), Vcc=5V, I2C-bus	SOT-23-5	28hd	-	6g	Mcc
U2-	-	PZU3.0DB2/DG	Z-diode	Dual, 2.95..3.2 V, Izt=5mA, Zzt=95Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U20	ef	XC9226A206M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U20	eh	XC6383E201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U20	ei	XC9226B206M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U20	en	XC9226C206M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U20	er	XC9226D206M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U21	ef	XC9226A216M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U21	eh	XC6383E211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U21	ei	XC9226B216M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U21	en	XC9226C216M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U21	er	XC9226D216M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U22	ef	XC9226A226M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U22	eh	XC6383E221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U22	ei	XC9226B226M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U22	en	XC9226C226M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U22	er	XC9226D226M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U23	ef	XC9226A236M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U23	eh	XC6383E231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U23	ei	XC9226B236M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U23	en	XC9226C236M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U23	er	XC9226D236M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U24	ef	XC9226A246M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U24	eh	XC6383E241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U24	ei	XC9226B246M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U24	en	XC9226C246M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U24	er	XC9226D246M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U25	-	SN74AUC1G125DBV	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log14	6g	Ti
U25	ef	XC9226A256M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U25	eh	XC6383E251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U25	ei	XC9226B256M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U25	en	XC9226C256M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U25	er	XC9226D256M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U26	-	SN74AUC1G126DBV	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log13	6g	Ti
U26	ef	XC9226A266M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U26	eh	XC6383E261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U26	ei	XC9226B266M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U26	en	XC9226C266M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U26	er	XC9226D266M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U27	ef	XC9226A276M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U27	eh	XC6383E271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U27	ei	XC9226B276M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U27	en	XC9226C276M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U27	er	XC9226D276M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U28	ef	XC9226A286M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U28	eh	XC6383E281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U28	ei	XC9226B286M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U28	en	XC9226C286M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U28	er	XC9226D286M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U29	ef	XC9226A296M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U29	eh	XC6383E291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U29	ei	XC9226B296M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U29	en	XC9226C296M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U29	er	XC9226D296M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U2A	-	XC6118N12AMR-G	Vdet-IC	1.2V±30mV, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
U2A	ef	XC9226A20CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U2A	ei	XC9226B20CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U2A	en	XC9226C20CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U2A	er	XC9226D20CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U2B	-	XC6118N12BMR-G	Vdet-IC	1.2V±30mV, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
U2B	ef	XC9226A21CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U2B	ei	XC9226B21CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U2B	en	XC9226C21CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U2B	er	XC9226D21CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U2C	-	XC6118N12CMR-G	Vdet-IC	1.2V±30mV, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
U2C	ef	XC9226A22CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U2C	ei	XC9226B22CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U2C	en	XC9226C22CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U2C	er	XC9226D22CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U2D	-	XC6118N12DMR-G	Vdet-IC	1.2V±30mV, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
U2D	ef	XC9226A23CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U2D	ei	XC9226B23CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U2D	en	XC9226C23CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U2D	er	XC9226D23CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U2E	ef	XC9226A24CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U2E	ei	XC9226B24CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U2E	en	XC9226C24CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U2E	er	XC9226D24CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U2F	ef	XC9226A25CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U2F	ei	XC9226B25CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U2F	en	XC9226C25CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U2F	er	XC9226D25CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U2H	ef	XC9226A26CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U2H	ei	XC9226B26CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U2H	en	XC9226C26CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U2H	er	XC9226D26CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U2K	ef	XC9226A27CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U2K	ei	XC9226B27CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U2K	en	XC9226C27CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U2K	er	XC9226D27CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U2L	ef	XC9226A28CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U2L	ei	XC9226B28CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U2L	en	XC9226C28CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U2L	er	XC9226D28CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U2M	ef	XC9226A29CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U2M	ei	XC9226B29CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U2M	en	XC9226C29CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U2M	er	XC9226D29CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U2p	-	PZU3.0DB2/DG	Z-diode	Dual, 2.95..3.2 V, Izt=5mA, Zzt=95Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U2t	-	PZU3.0DB2/DG	Z-diode	Dual, 2.95..3.2 V, Izt=5mA, Zzt=95Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
U2W	-	PZU3.0DB2/DG	Z-diode	Dual, 2.95..3.2 V, Izt=5mA, Zzt=95Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
U3	-	BD45371G	Vdet-IC	3.7V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
U3	-	TC74A3-5.0VCT	Tdet-IC	Sensor (-40..+125±3°C), Vcc=5V, I2C-bus	SOT-23-5	28hd	-	6g	Mcc
U3-	-	PZU3.3DB2/DG	Z-diode	Dual, 3.25..3.5V, Izt=5mA, Zzt=95Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U30	ef	XC9226A306M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U30	eh	XC6383E301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U30	ei	XC9226B306M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U30	em	XC9226F306M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U30	en	XC9226C306M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U30	eo	XC9226H306M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U30	ep	XC9226G306M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U30	eq	XC9226E306M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U30	er	XC9226D306M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U31	ef	XC9226A316M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U31	eh	XC6383E311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U31	ei	XC9226B316M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U31	em	XC9226F316M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U31	en	XC9226C316M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U31	eo	XC9226H316M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U31	ep	XC9226G316M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U31	eq	XC9226E316M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U31	er	XC9226D316M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U32	-	SN74AUC1G32DBV	CMOS-Log	2-input OR gate	SOT-23-5	28	Log4	6g	Ti
U32	ef	XC9226A326M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U32	eh	XC6383E321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U32	ei	XC9226B326M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U32	em	XC9226F326M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U32	en	XC9226C326M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U32	eo	XC9226H326M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U32	ep	XC9226G326M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U32	eq	XC9226E326M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U32	er	XC9226D326M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U33	ef	XC9226A336M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U33	eh	XC6383E331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U33	ei	XC9226B336M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U33	em	XC9226F336M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U33	en	XC9226C336M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U33	eo	XC9226H336M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U33	ep	XC9226G336M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U33	eq	XC9226E336M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U33	er	XC9226D336M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U34	ef	XC9226A346M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U34	eh	XC6383E341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U34	ei	XC9226B346M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U34	em	XC9226F346M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U34	en	XC9226C346M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U34	eo	XC9226H346M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U34	ep	XC9226G346M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U34	eq	XC9226E346M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U34	er	XC9226D346M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U35	ef	XC9226A356M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U35	eh	XC6383E351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U35	ei	XC9226B356M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U35	em	XC9226F356M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U35	en	XC9226C356M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U35	eo	XC9226H356M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U35	ep	XC9226G356M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U35	eq	XC9226E356M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U35	er	XC9226D356M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U36	ef	XC9226A366M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U36	eh	XC6383E361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U36	ei	XC9226B366M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U36	em	XC9226F366M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U36	en	XC9226C366M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U36	eo	XC9226H366M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U36	ep	XC9226G366M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U36	eq	XC9226E366M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U36	er	XC9226D366M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U37	ef	XC9226A376M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U37	eh	XC6383E371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U37	ei	XC9226B376M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U37	em	XC9226F376M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U37	en	XC9226C376M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U37	eo	XC9226H376M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U37	ep	XC9226G376M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U37	eq	XC9226E376M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U37	er	XC9226D376M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U38	ef	XC9226A386M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U38	eh	XC6383E381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U38	ei	XC9226B386M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U38	em	XC9226F386M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U38	en	XC9226C386M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U38	eo	XC9226H386M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U38	ep	XC9226G386M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U38	eq	XC9226E386M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U38	er	XC9226D386M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U39	ef	XC9226A396M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U39	eh	XC6383E391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U39	ei	XC9226B396M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U39	em	XC9226F396M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U39	en	XC9226C396M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U39	eo	XC9226H396M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U39	ep	XC9226G396M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U39	eq	XC9226E396M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U39	er	XC9226D396M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3A	-	XC6118N13AMR-G	Vdet-IC	1.3V±30mV, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
U3A	ef	XC9226A30CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3A	ei	XC9226B30CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3A	em	XC9226F30CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3A	en	XC9226C30CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3A	eo	XC9226H30CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3A	ep	XC9226G30CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3A	eq	XC9226E30CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3A	er	XC9226D30CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3B	-	XC6118N13BMR-G	Vdet-IC	1.3V±30mV, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
U3B	ef	XC9226A31CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3B	ei	XC9226B31CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3B	em	XC9226F31CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3B	en	XC9226C31CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3B	eo	XC9226H31CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3B	ep	XC9226G31CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3B	eq	XC9226E31CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3B	er	XC9226D31CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3C	-	XC6118N13CMR-G	Vdet-IC	1.3V±30mV, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
U3C	ef	XC9226A32CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3C	ei	XC9226B32CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3C	em	XC9226F32CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3C	en	XC9226C32CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3C	eo	XC9226H32CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3C	ep	XC9226G32CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3C	eq	XC9226E32CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3C	er	XC9226D32CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3D	-	XC6118N13DMR-G	Vdet-IC	1.3V±30mV, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
U3D	ef	XC9226A33CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3D	ei	XC9226B33CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3D	em	XC9226F33CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3D	en	XC9226C33CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3D	eo	XC9226H33CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3D	ep	XC9226G33CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3D	eq	XC9226E33CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3D	er	XC9226D33CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3E	ef	XC9226A34CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3E	ei	XC9226B34CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3E	em	XC9226F34CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3E	en	XC9226C34CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3E	eo	XC9226H34CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U3E	ep	XC9226G34CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3E	eq	XC9226E34CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3E	er	XC9226D34CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3F	ef	XC9226A35CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3F	ei	XC9226B35CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3F	em	XC9226F35CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3F	en	XC9226C35CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3F	eo	XC9226H35CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3F	ep	XC9226G35CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3F	eq	XC9226E35CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3F	er	XC9226D35CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3H	ef	XC9226A36CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3H	ei	XC9226B36CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3H	em	XC9226F36CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3H	en	XC9226C36CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3H	eo	XC9226H36CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3H	ep	XC9226G36CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3H	eq	XC9226E36CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3H	er	XC9226D36CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3K	ef	XC9226A37CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3K	ei	XC9226B37CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3K	em	XC9226F37CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3K	en	XC9226C37CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3K	eo	XC9226H37CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3K	ep	XC9226G37CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3K	eq	XC9226E37CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3K	er	XC9226D37CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3L	ef	XC9226A38CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3L	ei	XC9226B38CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3L	em	XC9226F38CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3L	en	XC9226C38CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3L	eo	XC9226H38CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3L	ep	XC9226G38CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3L	eq	XC9226E38CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3L	er	XC9226D38CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3M	ef	XC9226A39CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3M	ei	XC9226B39CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3M	em	XC9226F39CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U3M	en	XC9226C39CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3M	eo	XC9226H39CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3M	ep	XC9226G39CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U3M	eq	XC9226E39CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U3M	er	XC9226D39CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U3p	-	PZU3.3DB2/DG	Z-diode	Dual, 3.25..3.5V, Izt=5mA, Zzt=95Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U3t	-	PZU3.3DB2/DG	Z-diode	Dual, 3.25..3.5V, Izt=5mA, Zzt=95Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
U3W	-	PZU3.3DB2/DG	Z-diode	Dual, 3.25..3.5V, Izt=5mA, Zzt=95Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
U4	-	BD45361G	Vdet-IC	3.6V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
U4	-	TC74A4-5.0VCT	Tdet-IC	Sensor (-40..+125±3°C), Vcc=5V, I2C-bus	SOT-23-5	28hd	-	6g	Mcc
U4-	-	PZU3.6DB2/DG	Z-diode	Dual, 3.55..3.8V, Izt=5mA, Zzt=90Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U40	-	SN74AUC1G240DBV	CMOS-Log	Bus buffer inverted with 3–state output	SOT-23-5	28	Log22	6g	Ti
U40	ef	XC9226A406M	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U40	eh	XC6383E401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U40	ei	XC9226B406M	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U40	em	XC9226F406M	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U40	en	XC9226C406M	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U40	eo	XC9226H406M	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U40	ep	XC9226G406M	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U40	eq	XC9226E406M	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U40	er	XC9226D406M	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U41	eh	XC6383E411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U42	eh	XC6383E421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U43	eh	XC6383E431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U44	eh	XC6383E441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U45	eh	XC6383E451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U46	eh	XC6383E461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U47	eh	XC6383E471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U48	eh	XC6383E481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U49	eh	XC6383E491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U4A	-	XC6118N14AMR-G	Vdet-IC	1.4V±30mV, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
U4A	ef	XC9226A40CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U4A	ei	XC9226B40CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U4A	em	XC9226F40CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
U4A	en	XC9226C40CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U4A	eo	XC9226H40CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U4A	ep	XC9226G40CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
U4A	eq	XC9226E40CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
U4A	er	XC9226D40CM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
U4B	-	XC6118N14BMR-G	Vdet-IC	1.4V±30mV, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
U4C	-	XC6118N14CMR-G	Vdet-IC	1.4V±30mV, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
U4D	-	XC6118N14DMR-G	Vdet-IC	1.4V±30mV, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
U4p	-	PZU3.6DB2/DG	Z-diode	Dual, 3.55..3.8V, Izt=5mA, Zzt=90Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U4t	-	PZU3.6DB2/DG	Z-diode	Dual, 3.55..3.8V, Izt=5mA, Zzt=90Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
U4W	-	PZU3.6DB2/DG	Z-diode	Dual, 3.55..3.8V, Izt=5mA, Zzt=90Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
U5	-	AX6608-15B	LVR-IC	LDO, 1.5V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
U5	-	BD45351G	Vdet-IC	3.5V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
U5	-	TC74A5-5.0VCT	Tdet-IC	Sensor (-40..+125±3°C), Vcc=5V, I2C-bus	SOT-23-5	28hd	-	6g	Mcc
U5-	-	PZU3.9DB2/DG	Z-diode	Dual, 3.87..4.1V, Izt=5mA, Zzt=90Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U50	eh	XC6383E501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U51	eh	XC6383E511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U52	eh	XC6383E521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U53	eh	XC6383E531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U54	eh	XC6383E541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U55	eh	XC6383E551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U56	eh	XC6383E561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U57	eh	XC6383E571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U58	eh	XC6383E581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U59	eh	XC6383E591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U5A	-	XC6118N15AMR-G	Vdet-IC	1.5V±30mV, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
U5B	-	XC6118N15BMR-G	Vdet-IC	1.5V±30mV, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
U5C	-	XC6118N15CMR-G	Vdet-IC	1.5V±30mV, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
U5D	-	XC6118N15DMR-G	Vdet-IC	1.5V±30mV, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
U5p	-	PZU3.9DB2/DG	Z-diode	Dual, 3.87..4.1V, Izt=5mA, Zzt=90Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U5t	-	PZU3.9DB2/DG	Z-diode	Dual, 3.87..4.1V, Izt=5mA, Zzt=90Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
U5W	-	PZU3.9DB2/DG	Z-diode	Dual, 3.87..4.1V, Izt=5mA, Zzt=90Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
U6	-	BD45341G	Vdet-IC	3.4V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
U6	-	TC74A6-5.0VCT	Tdet-IC	Sensor (-40..+125±3°C), Vcc=5V, I2C-bus	SOT-23-5	28hd	-	6g	Mcc
U6-	-	PZU4.3DB2/DG	Z-diode	Dual, 4.15..4.34V, Izt=5mA, Zzt=90Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U60	eh	XC6383E601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U61	eh	XC6383E611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U62	eh	XC6383E621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U63	eh	XC6383E631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U64	eh	XC6383E641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U65	eh	XC6383E651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U66	eh	XC6383E661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U67	eh	XC6383E671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U68	eh	XC6383E681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U69	eh	XC6383E691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U6A	-	XC6118N16AMR-G	Vdet-IC	1.6V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
U6B	-	XC6118N16BMR-G	Vdet-IC	1.6V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
U6C	-	XC6118N16CMR-G	Vdet-IC	1.6V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
U6D	-	XC6118N16DMR-G	Vdet-IC	1.6V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
U6p	-	PZU4.3DB2/DG	Z-diode	Dual, 4.15..4.34V, Izt=5mA, Zzt=90Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U6t	-	PZU4.3DB2/DG	Z-diode	Dual, 4.15..4.34V, Izt=5mA, Zzt=90Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
U6W	-	PZU4.3DB2/DG	Z-diode	Dual, 4.15..4.34V, Izt=5mA, Zzt=90Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
U7	-	BD45331G	Vdet-IC	3.3V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
U7	-	SN74AUC1G17DCK	CMOS-Log	Schmitt-trigger	SC-70-5	28	Log11	6g	Ti
U7	-	SN74AUC1G17DRL	CMOS-Log	Schmitt-trigger	SOT-553	30	Log11	6g	Ti
U7	-	TC74A7-5.0VCT	Tdet-IC	Sensor (-40..+125±3°C), Vcc=5V, I2C-bus	SOT-23-5	28hd	-	6g	Mcc
U7-	-	PZU4.7DB2/DG	Z-diode	Dual, 4.55..4.75V, Izt=5mA, Zzt=80Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U70	eh	XC6383E701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
U7A	-	XC6118N17AMR-G	Vdet-IC	1.7V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
U7B	-	XC6118N17BMR-G	Vdet-IC	1.7V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
U7C	-	XC6118N17CMR-G	Vdet-IC	1.7V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
U7D	-	XC6118N17DMR-G	Vdet-IC	1.7V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
U7p	-	PZU4.7DB2/DG	Z-diode	Dual, 4.55..4.75V, Izt=5mA, Zzt=80Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U7t	-	PZU4.7DB2/DG	Z-diode	Dual, 4.55..4.75V, Izt=5mA, Zzt=80Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
U7W	-	PZU4.7DB2/DG	Z-diode	Dual, 4.55..4.75V, Izt=5mA, Zzt=80Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
U8	-	BD45321G	Vdet-IC	3.2V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
U8-	-	PZU5.1DB2/DG	Z-diode	Dual, 4.98..5.2V, Izt=5mA, Zzt=60Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U8A	-	XC6118N18AMR-G	Vdet-IC	1.8V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U8B	-	XC6118N18BMR-G	Vdet-IC	1.8V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
U8C	-	XC6118N18CMR-G	Vdet-IC	1.8V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
U8D	-	XC6118N18DMR-G	Vdet-IC	1.8V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
U8p	-	PZU5.1DB2/DG	Z-diode	Dual, 4.98..5.2V, Izt=5mA, Zzt=60Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U8t	-	PZU5.1DB2/DG	Z-diode	Dual, 4.98..5.2V, Izt=5mA, Zzt=60Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
U8W	-	PZU5.1DB2/DG	Z-diode	Dual, 4.98..5.2V, Izt=5mA, Zzt=60Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
U9	-	BD45311G	Vdet-IC	3.1V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
U9-	-	PZU5.6DB2/DG	Z-diode	Dual, 5.49..5.73V, Izt=5mA, Zzt=40Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U9A	-	XC6118N19AMR-G	Vdet-IC	1.9V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
U9B	-	XC6118N19BMR-G	Vdet-IC	1.9V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
U9C	-	XC6118N19CMR-G	Vdet-IC	1.9V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
U9D	-	XC6118N19DMR-G	Vdet-IC	1.9V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
U9p	-	PZU5.6DB2/DG	Z-diode	Dual, 5.49..5.73V, Izt=5mA, Zzt=40Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
U9t	-	PZU5.6DB2/DG	Z-diode	Dual, 5.49..5.73V, Izt=5mA, Zzt=40Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
U9W	-	PZU5.6DB2/DG	Z-diode	Dual, 5.49..5.73V, Izt=5mA, Zzt=40Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
Ua	-	AX6608-19A	LVR-IC	LDO, 1.9V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
Ua	-	AX6608-19B	LVR-IC	LDO, 1.9V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
Ua	-	BD53E57G-M	Vdet-IC	5.7V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
UA	-	AX6608-18B	LVR-IC	LDO, 1.8V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
UA	-	BD45301G	Vdet-IC	3.0V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
UA	-	SN74AUC1G00DCK	CMOS-Log	2-input NAND gate	SC-70-5	28	Log1	6g	Ti
UA	-	SN74AUC1G00DRL	CMOS-Log	2-input NAND gate	SOT-553	30	Log1	6g	Ti
UA-	-	PZU6.2DB2/DG	Z-diode	Dual, 6.06..6.33V, Izt=5mA, Zzt=30Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UA9	ef	XC9226A0M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UA9	ei	XC9226B0M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UA9	en	XC9226C0M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UA9	er	XC9226D0M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UAA	-	RP503N081A	DC-DC-IC	PWM/VFM step-down, 0.8V±18mV, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAB	-	RP503N091A	DC-DC-IC	PWM/VFM step-down, 0.9V±18mV, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAC	-	RP503N101A	DC-DC-IC	PWM/VFM step-down, 1.0V±18mV, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAD	-	RP503N111A	DC-DC-IC	PWM/VFM step-down, 1.1V±18mV, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAE	-	RP503N121A	DC-DC-IC	PWM/VFM step-down, 1.2V±1.5%, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAF	-	RP503N121A5	DC-DC-IC	PWM/VFM step-down, 1.25V±1.5%, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAG	-	RP503N131A	DC-DC-IC	PWM/VFM step-down, 1.3V±1.5%, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAH	-	RP503N141A	DC-DC-IC	PWM/VFM step-down, 1.4V±1.5%, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAJ	-	RP503N151A	DC-DC-IC	PWM/VFM step-down, 1.5V±1.5%, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAK	-	RP503N161A	DC-DC-IC	PWM/VFM step-down, 1.6V±1.5%, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAL	-	RP503N171A	DC-DC-IC	PWM/VFM step-down, 1.7V±1.5%, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAM	-	RP503N181A	DC-DC-IC	PWM/VFM step-down, 1.8V±1.5%, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAM	ef	XC9226A0MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UAM	ei	XC9226B0MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UAM	en	XC9226C0MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UAM	er	XC9226D0MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UAN	-	RP503N191A	DC-DC-IC	PWM/VFM step-down, 1.9V±1.5%, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAp	-	PZU6.2DB2/DG	Z-diode	Dual, 6.06..6.33V, Izt=5mA, Zzt=30Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UAP	-	RP503N201A	DC-DC-IC	PWM/VFM step-down, 2.0V±1.5%, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAQ	-	RP503N211A	DC-DC-IC	PWM/VFM step-down, 2.1V±1.5%, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAR	-	RP503N221A	DC-DC-IC	PWM/VFM step-down, 2.2V±1.5%, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAS	-	RP503N231A	DC-DC-IC	PWM/VFM step-down, 2.3V±1.5%, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAt	-	PZU6.2DB2/DG	Z-diode	Dual, 6.06..6.33V, Izt=5mA, Zzt=30Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
UAT	-	RP503N241A	DC-DC-IC	PWM/VFM step-down, 2.4V±1.5%, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAU	-	RP503N251A	DC-DC-IC	PWM/VFM step-down, 2.5V±1.5%, 600mA, +CE	SOT-23-5	28gq	DC20	6g	Ric
UAW	-	PZU6.2DB2/DG	Z-diode	Dual, 6.06..6.33V, Izt=5mA, Zzt=30Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
Ub	-	AX6608-21A	LVR-IC	LDO, 2.1V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
Ub	-	BD53E58G-M	Vdet-IC	5.8V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
UB	-	AX6608-12A	LVR-IC	LDO, 1.2V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
UB	-	AX6608-21B	LVR-IC	LDO, 2.1V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
UB	-	BD45291G	Vdet-IC	2.9V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
UB-	-	PZU6.8DB2/DG	Z-diode	Dual, 6.65..6.93V, Izt=5mA, Zzt=20Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UB0	ef	XC9226A1A6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UB0	ei	XC9226B1A6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UB0	en	XC9226C1A6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UB0	er	XC9226D1A6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UB1	ef	XC9226A1B6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UB1	ei	XC9226B1B6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UB1	en	XC9226C1B6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UB1	er	XC9226D1B6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UB2	ef	XC9226A1C6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UB2	ei	XC9226B1C6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UB2	en	XC9226C1C6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UB2	er	XC9226D1C6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UB3	ef	XC9226A1D6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UB3	ei	XC9226B1D6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UB3	en	XC9226C1D6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UB3	er	XC9226D1D6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UB4	ef	XC9226A1E6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UB4	ei	XC9226B1E6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UB4	en	XC9226C1E6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UB4	er	XC9226D1E6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UB5	ef	XC9226A1F6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UB5	ei	XC9226B1F6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UB5	en	XC9226C1F6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UB5	er	XC9226D1F6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UB6	ef	XC9226A1H6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UB6	ei	XC9226B1H6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UB6	en	XC9226C1H6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UB6	er	XC9226D1H6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UB7	ef	XC9226A1K6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UB7	ei	XC9226B1K6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UB7	en	XC9226C1K6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UB7	er	XC9226D1K6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UB8	ef	XC9226A1L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UB8	ei	XC9226B1L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UB8	en	XC9226C1L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UB8	er	XC9226D1L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UB9	ef	XC9226A1M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UB9	ei	XC9226B1M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UB9	en	XC9226C1M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UB9	er	XC9226D1M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UBA	-	RP503N082A	DC-DC-IC	PWM/VFM step-down, 0.8V±18mV, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBA	ef	XC9226A1ACM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UBA	ei	XC9226B1ACM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UBA	en	XC9226C1ACM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UBA	er	XC9226D1ACM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UBB	-	RP503N092A	DC-DC-IC	PWM/VFM step-down, 0.9V±18mV, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBB	ef	XC9226A1BCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UBB	ei	XC9226B1BCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UBB	en	XC9226C1BCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UBB	er	XC9226D1BCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UBC	-	RP503N102A	DC-DC-IC	PWM/VFM step-down, 1.0V±18mV, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBC	ef	XC9226A1CCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UBC	ei	XC9226B1CCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UBC	en	XC9226C1CCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UBC	er	XC9226D1CCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UBD	-	RP503N112A	DC-DC-IC	PWM/VFM step-down, 1.1V±18mV, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBD	ef	XC9226A1DCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UBD	ei	XC9226B1DCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UBD	en	XC9226C1DCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UBD	er	XC9226D1DCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UBE	-	RP503N122A	DC-DC-IC	PWM/VFM step-down, 1.2V±1.5%, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBE	ef	XC9226A1ECM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UBE	ei	XC9226B1ECM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UBE	en	XC9226C1ECM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UBE	er	XC9226D1ECM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UBF	-	RP503N122A5	DC-DC-IC	PWM/VFM step-down, 1.25V±1.5%, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBF	ef	XC9226A1FCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UBF	ei	XC9226B1FCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UBF	en	XC9226C1FCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UBF	er	XC9226D1FCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UBG	-	RP503N132A	DC-DC-IC	PWM/VFM step-down, 1.3V±1.5%, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBH	-	RP503N142A	DC-DC-IC	PWM/VFM step-down, 1.4V±1.5%, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBH	ef	XC9226A1HCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UBH	ei	XC9226B1HCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UBH	en	XC9226C1HCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UBH	er	XC9226D1HCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UBJ	-	RP503N152A	DC-DC-IC	PWM/VFM step-down, 1.5V±1.5%, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBK	-	RP503N162A	DC-DC-IC	PWM/VFM step-down, 1.6V±1.5%, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBK	ef	XC9226A1KCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UBK	ei	XC9226B1KCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UBK	en	XC9226C1KCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UBK	er	XC9226D1KCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UBL	-	RP503N172A	DC-DC-IC	PWM/VFM step-down, 1.7V±1.5%, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBL	ef	XC9226A1LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UBL	ei	XC9226B1LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UBL	en	XC9226C1LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UBL	er	XC9226D1LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UBM	-	RP503N182A	DC-DC-IC	PWM/VFM step-down, 1.8V±1.5%, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBM	ef	XC9226A1MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UBM	ei	XC9226B1MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UBM	en	XC9226C1MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UBM	er	XC9226D1MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UBN	-	RP503N192A	DC-DC-IC	PWM/VFM step-down, 1.9V±1.5%, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBp	-	PZU6.8DB2/DG	Z-diode	Dual, 6.65..6.93V, Izt=5mA, Zzt=20Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UBP	-	RP503N202A	DC-DC-IC	PWM/VFM step-down, 2.0V±1.5%, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBQ	-	RP503N212A	DC-DC-IC	PWM/VFM step-down, 2.1V±1.5%, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBR	-	RP503N222A	DC-DC-IC	PWM/VFM step-down, 2.2V±1.5%, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBS	-	RP503N232A	DC-DC-IC	PWM/VFM step-down, 2.3V±1.5%, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBt	-	PZU6.8DB2/DG	Z-diode	Dual, 6.65..6.93V, Izt=5mA, Zzt=20Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
UBT	-	RP503N242A	DC-DC-IC	PWM/VFM step-down, 2.4V±1.5%, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBU	-	RP503N252A	DC-DC-IC	PWM/VFM step-down, 2.5V±1.5%, 600mA, +CE, CL	SOT-23-5	28gq	DC20	6g	Ric
UBW	-	PZU6.8DB2/DG	Z-diode	Dual, 6.65..6.93V, Izt=5mA, Zzt=20Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
Uc	-	BD53E59G-M	Vdet-IC	5.9V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
UC	-	AX6608-15A	LVR-IC	LDO, 1.5V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
UC	-	AX6608-22B	LVR-IC	LDO, 2.2V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
UC	-	BD45281G	Vdet-IC	2.8V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
UC-	-	PZU7.5DB2/DG	Z-diode	Dual, 7.28..7.6V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UC0	ef	XC9226A2A6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UC0	ei	XC9226B2A6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UC0	en	XC9226C2A6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UC0	er	XC9226D2A6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UC1	ef	XC9226A2B6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UC1	ei	XC9226B2B6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UC1	en	XC9226C2B6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UC1	er	XC9226D2B6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UC2	ef	XC9226A2C6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UC2	ei	XC9226B2C6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UC2	en	XC9226C2C6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UC2	er	XC9226D2C6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UC3	ef	XC9226A2D6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UC3	ei	XC9226B2D6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UC3	en	XC9226C2D6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UC3	er	XC9226D2D6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UC4	ef	XC9226A2E6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UC4	ei	XC9226B2E6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UC4	en	XC9226C2E6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UC4	er	XC9226D2E6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UC5	ef	XC9226A2F6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UC5	ei	XC9226B2F6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UC5	en	XC9226C2F6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UC5	er	XC9226D2F6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UC6	ef	XC9226A2H6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UC6	ei	XC9226B2H6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UC6	en	XC9226C2H6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UC6	er	XC9226D2H6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UC7	ef	XC9226A2K6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UC7	ei	XC9226B2K6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UC7	en	XC9226C2K6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UC7	er	XC9226D2K6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UC8	ef	XC9226A2L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UC8	ei	XC9226B2L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UC8	en	XC9226C2L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UC8	er	XC9226D2L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UC9	ef	XC9226A2M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UC9	ei	XC9226B2M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UC9	en	XC9226C2M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UC9	er	XC9226D2M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UCA	ef	XC9226A2ACM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UCA	ei	XC9226B2ACM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UCA	en	XC9226C2ACM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UCA	er	XC9226D2ACM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UCB	ef	XC9226A2BCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UCB	ei	XC9226B2BCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UCB	en	XC9226C2BCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UCB	er	XC9226D2BCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UCC	ef	XC9226A2CCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UCC	ei	XC9226B2CCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UCC	en	XC9226C2CCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UCC	er	XC9226D2CCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UCD	ef	XC9226A2DCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UCD	ei	XC9226B2DCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UCD	en	XC9226C2DCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UCD	er	XC9226D2DCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UCE	ef	XC9226A2ECM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UCE	ei	XC9226B2ECM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UCE	en	XC9226C2ECM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UCE	er	XC9226D2ECM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UCF	ef	XC9226A2FCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UCF	ei	XC9226B2FCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UCF	en	XC9226C2FCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UCF	er	XC9226D2FCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UCH	ef	XC9226A2HCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UCH	ei	XC9226B2HCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UCH	en	XC9226C2HCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UCH	er	XC9226D2HCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UCK	ef	XC9226A2KCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UCK	ei	XC9226B2KCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UCK	en	XC9226C2KCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UCK	er	XC9226D2KCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UCL	ef	XC9226A2LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UCL	ei	XC9226B2LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UCL	en	XC9226C2LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UCL	er	XC9226D2LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UCM	ef	XC9226A2MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UCM	ei	XC9226B2MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UCM	en	XC9226C2MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UCM	er	XC9226D2MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UCp	-	PZU7.5DB2/DG	Z-diode	Dual, 7.28..7.6V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UCt	-	PZU7.5DB2/DG	Z-diode	Dual, 7.28..7.6V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
UCW	-	PZU7.5DB2/DG	Z-diode	Dual, 7.28..7.6V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
Ud	-	BD53E60G-M	Vdet-IC	6.0V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
UD	-	AX6608-18A	LVR-IC	LDO, 1.8V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
UD	-	AX6608-27B	LVR-IC	LDO, 2.7V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
UD	-	BD45271G	Vdet-IC	2.7V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
UD-	-	PZU8.2DB2/DG	Z-diode	Dual, 8.02..8.36V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UD0	ef	XC9226A3A6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD0	ei	XC9226B3A6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD0	em	XC9226F3A6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.05V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD0	en	XC9226C3A6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD0	eo	XC9226H3A6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.05V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD0	ep	XC9226G3A6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.05V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD0	eq	XC9226E3A6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.05V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD0	er	XC9226D3A6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD1	ef	XC9226A3B6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD1	ei	XC9226B3B6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD1	em	XC9226F3B6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.15V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD1	en	XC9226C3B6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD1	eo	XC9226H3B6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.15V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD1	ep	XC9226G3B6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.15V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD1	eq	XC9226E3B6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.15V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD1	er	XC9226D3B6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD2	ef	XC9226A3C6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD2	ei	XC9226B3C6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD2	em	XC9226F3C6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.25V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD2	en	XC9226C3C6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD2	eo	XC9226H3C6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.25V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD2	ep	XC9226G3C6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.25V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD2	eq	XC9226E3C6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.25V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD2	er	XC9226D3C6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD3	ef	XC9226A3D6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD3	ei	XC9226B3D6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UD3	em	XC9226F3D6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.35V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD3	en	XC9226C3D6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD3	eo	XC9226H3D6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.35V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD3	ep	XC9226G3D6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.35V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD3	eq	XC9226E3D6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.35V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD3	er	XC9226D3D6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD4	ef	XC9226A3E6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD4	ei	XC9226B3E6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD4	em	XC9226F3E6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.45V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD4	en	XC9226C3E6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD4	eo	XC9226H3E6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.45V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD4	ep	XC9226G3E6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.45V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD4	eq	XC9226E3E6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.45V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD4	er	XC9226D3E6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD5	ef	XC9226A3F6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD5	ei	XC9226B3F6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD5	em	XC9226F3F6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.55V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD5	en	XC9226C3F6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD5	eo	XC9226H3F6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.55V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD5	ep	XC9226G3F6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.55V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD5	eq	XC9226E3F6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.55V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD5	er	XC9226D3F6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD6	ef	XC9226A3H6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD6	ei	XC9226B3H6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD6	em	XC9226F3H6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.65V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD6	en	XC9226C3H6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD6	eo	XC9226H3H6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.65V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD6	ep	XC9226G3H6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.65V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD6	eq	XC9226E3H6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.65V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD6	er	XC9226D3H6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD7	ef	XC9226A3K6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD7	ei	XC9226B3K6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD7	em	XC9226F3K6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.75V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD7	en	XC9226C3K6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD7	eo	XC9226H3K6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.75V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD7	ep	XC9226G3K6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.75V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD7	eq	XC9226E3K6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.75V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD7	er	XC9226D3K6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD8	ef	XC9226A3L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD8	ei	XC9226B3L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD8	em	XC9226F3L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.85V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD8	en	XC9226C3L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD8	eo	XC9226H3L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.85V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD8	ep	XC9226G3L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.85V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD8	eq	XC9226E3L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.85V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD8	er	XC9226D3L6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD9	ef	XC9226A3M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD9	ei	XC9226B3M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD9	em	XC9226F3M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.95V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UD9	en	XC9226C3M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD9	eo	XC9226H3M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.95V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UD9	ep	XC9226G3M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.95V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UD9	eq	XC9226E3M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.95V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UD9	er	XC9226D3M6M	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDA	ef	XC9226A3ACM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDA	ei	XC9226B3ACM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDA	em	XC9226F3ACM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDA	en	XC9226C3ACM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDA	eo	XC9226H3ACM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDA	ep	XC9226G3ACM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDA	eq	XC9226E3ACM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDA	er	XC9226D3ACM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDB	ef	XC9226A3BCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDB	ei	XC9226B3BCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDB	em	XC9226F3BCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDB	en	XC9226C3BCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDB	eo	XC9226H3BCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDB	ep	XC9226G3BCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDB	eq	XC9226E3BCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDB	er	XC9226D3BCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UDC	ef	XC9226A3CCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDC	ei	XC9226B3CCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDC	em	XC9226F3CCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDC	en	XC9226C3CCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDC	eo	XC9226H3CCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDC	ep	XC9226G3CCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDC	eq	XC9226E3CCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDC	er	XC9226D3CCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDD	ef	XC9226A3DCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDD	ei	XC9226B3DCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDD	em	XC9226F3DCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDD	en	XC9226C3DCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDD	eo	XC9226H3DCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDD	ep	XC9226G3DCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDD	eq	XC9226E3DCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDD	er	XC9226D3DCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDE	ef	XC9226A3ECM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDE	ei	XC9226B3ECM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDE	em	XC9226F3ECM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDE	en	XC9226C3ECM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDE	eo	XC9226H3ECM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDE	ep	XC9226G3ECM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDE	eq	XC9226E3ECM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDE	er	XC9226D3ECM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDF	ef	XC9226A3FCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDF	ei	XC9226B3FCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDF	em	XC9226F3FCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDF	en	XC9226C3FCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDF	eo	XC9226H3FCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDF	ep	XC9226G3FCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDF	eq	XC9226E3FCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDF	er	XC9226D3FCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDH	ef	XC9226A3HCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDH	ei	XC9226B3HCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDH	em	XC9226F3HCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDH	en	XC9226C3HCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDH	eo	XC9226H3HCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDH	ep	XC9226G3HCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDH	eq	XC9226E3HCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDH	er	XC9226D3HCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDK	ef	XC9226A3KCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDK	ei	XC9226B3KCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDK	em	XC9226F3KCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDK	en	XC9226C3KCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDK	eo	XC9226H3KCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDK	ep	XC9226G3KCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDK	eq	XC9226E3KCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDK	er	XC9226D3KCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDL	-	MIC2753-LBM5	Vdet-IC	4.63V±5%, HV Flag, MR, +Reset PPO	SOT-23-5	28eg	VD8	6g	Mcr
UDL	ef	XC9226A3LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDL	ei	XC9226B3LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDL	em	XC9226F3LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDL	en	XC9226C3LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDL	eo	XC9226H3LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDL	ep	XC9226G3LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDL	eq	XC9226E3LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDL	er	XC9226D3LCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDM	-	MIC2753-MBM5	Vdet-IC	4.38V±10%, HV Flag, MR, +Reset PPO	SOT-23-5	28eg	VD8	6g	Mcr
UDM	ef	XC9226A3MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDM	ei	XC9226B3MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDM	em	XC9226F3MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
UDM	en	XC9226C3MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDM	eo	XC9226H3MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDM	ep	XC9226G3MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
UDM	eq	XC9226E3MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
UDM	er	XC9226D3MCM	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
UDp	-	PZU8.2DB2/DG	Z-diode	Dual, 8.02..8.36V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UDR	-	MIC2753-RBM5	Vdet-IC	2.63V±5%, HV Flag, MR, +Reset PPO	SOT-23-5	28eg	VD8	6g	Mcr
UDS	-	MIC2753-SBM5	Vdet-IC	2.93V±10%, HV Flag, MR, +Reset PPO	SOT-23-5	28eg	VD8	6g	Mcr
UDt	-	PZU8.2DB2/DG	Z-diode	Dual, 8.02..8.36V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UDT	-	MIC2753-TBM5	Vdet-IC	3.08V±5%, HV Flag, MR, +Reset PPO	SOT-23-5	28eg	VD8	6g	Mcr
UDW	-	PZU8.2DB2/DG	Z-diode	Dual, 8.02..8.36V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
Ue	-	AX6608-20A	LVR-IC	LDO, 2.0V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
Ue	-	AX6608-20B	LVR-IC	LDO, 2.0V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
Ue	-	BD45E235G-M	Vdet-IC	2.3V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
UE	-	AX6608-28B	LVR-IC	LDO, 2.8V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
UE	-	BD45261G	Vdet-IC	2.6V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
UE-	-	PZU9.1DB2/DG	Z-diode	Dual, 8.85..9.23V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UEL	-	MIC2754-LBM5	Vdet-IC	4.63V±5%, HV Flag, MR, -Reset PPO	SOT-23-5	28eh	VD8	6g	Mcr
UEM	-	MIC2754-MBM5	Vdet-IC	4.38V±10%, HV Flag, MR, -Reset PPO	SOT-23-5	28eh	VD8	6g	Mcr
UEp	-	PZU9.1DB2/DG	Z-diode	Dual, 8.85..9.23V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UER	-	MIC2754-RBM5	Vdet-IC	2.63V±5%, HV Flag, MR, -Reset PPO	SOT-23-5	28eh	VD8	6g	Mcr
UES	-	MIC2754-SBM5	Vdet-IC	2.93V±10%, HV Flag, MR, -Reset PPO	SOT-23-5	28eh	VD8	6g	Mcr
UEt	-	PZU9.1DB2/DG	Z-diode	Dual, 8.85..9.23V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
UET	-	MIC2754-TBM5	Vdet-IC	3.08V±5%, HV Flag, MR, -Reset PPO	SOT-23-5	28eh	VD8	6g	Mcr
UEW	-	PZU9.1DB2/DG	Z-diode	Dual, 8.85..9.23V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
Uf	-	AX6608-26A	LVR-IC	LDO, 2.6V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
Uf	-	AX6608-26B	LVR-IC	LDO, 2.6V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
Uf	-	BD45E245G-M	Vdet-IC	2.4V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
UF	-	AX6608-25A	LVR-IC	LDO, 2.5V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
UF	-	AX6608-25B	LVR-IC	LDO, 2.5V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
UF	-	BD45251G	Vdet-IC	2.5V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
UF	-	SN74AUC1G14DCK	CMOS-Log	Inverting Schmitt-trigger	SC-70-5	28	Log7	6g	Ti
UF-	-	PZU10DB2/DG	Z-diode	Dual, 9.77..10.21V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UFp	-	PZU10DB2/DG	Z-diode	Dual, 9.77..10.21V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UFt	-	PZU10DB2/DG	Z-diode	Dual, 9.77..10.21V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
UFW	-	PZU10DB2/DG	Z-diode	Dual, 9.77..10.21V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
Ug	-	BD45E255G-M	Vdet-IC	2.5V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
UG	-	AX6608-28A	LVR-IC	LDO, 2.8V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
UG	-	BD45241G	Vdet-IC	2.4V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
UG	-	SN74AUC1G31DRL	CMOS-Log	2-input OR gate	SOT-553	30	Log4	6g	Ti
UG	-	SN74AUC1G32DCK	CMOS-Log	2-input OR gate	SC-70-5	28	Log4	6g	Ti
UG-	-	PZU11DB2/DG	Z-diode	Dual, 10.76..11.22V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UGp	-	PZU11DB2/DG	Z-diode	Dual, 10.76..11.22V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UGt	-	PZU11DB2/DG	Z-diode	Dual, 10.76..11.22V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
UGW	-	PZU11DB2/DG	Z-diode	Dual, 10.76..11.22V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
Uh	-	AX6608-29A	LVR-IC	LDO, 2.9V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
Uh	-	AX6608-29B	LVR-IC	LDO, 2.9V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
Uh	-	BD45E265G-M	Vdet-IC	2.6V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
UH	-	AX6608-30A	LVR-IC	LDO, 3.0V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
UH	-	AX6608-30B	LVR-IC	LDO, 3.0V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
UH	-	BD45231G	Vdet-IC	2.3V±1%, -MR, -Reset ODO, 100ms	SSOP-5	28vdp	VD4	6c	Rhm
UH-	-	PZU12DB2/DG	Z-diode	Dual, 11.74..12.24V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UHp	-	PZU12DB2/DG	Z-diode	Dual, 11.74..12.24V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UHt	-	PZU12DB2/DG	Z-diode	Dual, 11.74..12.24V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
UHW	-	PZU12DB2/DG	Z-diode	Dual, 11.74..12.24V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
Ul	-	AX6608-33A	LVR-IC	LDO, 3.3V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
Ul	-	AX6608-33B	LVR-IC	LDO, 3.3V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
UJ	-	BD45482G	Vdet-IC	4.8V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
UJ17	-	MIC2775-17BM5	Vdet-IC	1.69V, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6g	Mcr
UJ17	fb	MIC2775-17YM5	Vdet-IC	1.69V, -MR, ±Reset PPO, Pb-Free	SOT-23-5	28xf	VD21	6g	Mcr
UJ22	-	MIC2775-22BM5	Vdet-IC	2.25V, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6g	Mcr
UJ22	fb	MIC2775-22YM5	Vdet-IC	2.25V, -MR, ±Reset PPO, Pb-Free	SOT-23-5	28xf	VD21	6g	Mcr
UJ23	-	MIC2775-23BM5	Vdet-IC	2.34V, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6g	Mcr
UJ23	fb	MIC2775-23YM5	Vdet-IC	2.34V, -MR, ±Reset PPO, Pb-Free	SOT-23-5	28xf	VD21	6g	Mcr
UJ25	-	MIC2775-25BM5	Vdet-IC	2.53V, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6g	Mcr
UJ25	fb	MIC2775-25YM5	Vdet-IC	2.53V, -MR, ±Reset PPO, Pb-Free	SOT-23-5	28xf	VD21	6g	Mcr
UJ26	-	MIC2775-26BM5	Vdet-IC	2.67V, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6g	Mcr
UJ26	fb	MIC2775-26YM5	Vdet-IC	2.67V, -MR, ±Reset PPO, Pb-Free	SOT-23-5	28xf	VD21	6g	Mcr
UJ28	-	MIC2775-28BM5	Vdet-IC	2.81V, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6g	Mcr
UJ28	fb	MIC2775-28YM5	Vdet-IC	2.81V, -MR, ±Reset PPO, Pb-Free	SOT-23-5	28xf	VD21	6g	Mcr
UJ29	-	MIC2775-29BM5	Vdet-IC	2.93V, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6g	Mcr
UJ29	fb	MIC2775-29YM5	Vdet-IC	2.93V, -MR, ±Reset PPO, Pb-Free	SOT-23-5	28xf	VD21	6g	Mcr
UJ31	-	MIC2775-31BM5	Vdet-IC	3.09V, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6g	Mcr
UJ31	fb	MIC2775-31YM5	Vdet-IC	3.09V, -MR, ±Reset PPO, Pb-Free	SOT-23-5	28xf	VD21	6g	Mcr
UJ44	-	MIC2775-44BM5	Vdet-IC	4.43V, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6g	Mcr
UJ44	fb	MIC2775-44YM5	Vdet-IC	4.43V, -MR, ±Reset PPO, Pb-Free	SOT-23-5	28xf	VD21	6g	Mcr
UJ46	-	MIC2775-46BM5	Vdet-IC	4.68V, -MR, ±Reset PPO	SOT-23-5	28xf	VD21	6g	Mcr
UJ46	fb	MIC2775-46YM5	Vdet-IC	4.68V, -MR, ±Reset PPO, Pb-Free	SOT-23-5	28xf	VD21	6g	Mcr
Uk	-	BD45E275G-M	Vdet-IC	2.7V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UK	-	BD45472G	Vdet-IC	4.7V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
UK	-	MCP1824T-ADJE/OT	LVR-IC	LDO, Adjustable, 0.8..5.0V±2%, 300mA, +CE	SOT-23-5	28sg	VR16	6g	Mcc
UK	-	SN74AUC1G240DCK	CMOS-Log	Bus buffer inverted with 3–state output	SC-70-5	28	Log22	6g	Ti
UK-	-	PZU13DB2/DG	Z-diode	Dual, 12.91..13.49V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UKp	-	PZU13DB2/DG	Z-diode	Dual, 12.91..13.49V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UKt	-	PZU13DB2/DG	Z-diode	Dual, 12.91..13.49V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
UKW	-	PZU13DB2/DG	Z-diode	Dual, 12.91..13.49V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
UL	-	MCP1824T-0802E/OT	LVR-IC	LDO, 0.8V±2%, 300mA, +CE	SOT-23-5	28yp	VR4	6g	Mcc
UL	-	R1122N501B	LVR-IC	LDO, Low noise, 5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
UL-	-	PZU14DB2/DG	Z-diode	Dual, 13.7..14.3V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UL5	-	U74AHCT1G125-AF5	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log14	6a	Utc
UL5	-	U74AHCT1G125-AL5	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log14	6a	Utc
UL5G	-	U74AHCT1G125G-AF5	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log14	6a	Utc
UL5G	-	U74AHCT1G125G-AL5	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log14	6a	Utc
UL5L	-	U74AHCT1G125L-AF5	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log14	6a	Utc
UL5L	-	U74AHCT1G125L-AL5	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log14	6a	Utc
UL6	-	U74AHCT1G126-AF5	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log13	6a	Utc
UL6	-	U74AHCT1G126-AL5	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log13	6a	Utc
UL6G	-	U74AHCT1G126G-AF5	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log13	6a	Utc
UL6G	-	U74AHCT1G126G-AL5	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log13	6a	Utc
UL6L	-	U74AHCT1G126L-AF5	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log13	6a	Utc
UL6L	-	U74AHCT1G126L-AL5	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log13	6a	Utc
ULp	-	PZU14DB2/DG	Z-diode	Dual, 13.7..14.3V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
ULt	-	PZU14DB2/DG	Z-diode	Dual, 13.7..14.3V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
ULW	-	PZU14DB2/DG	Z-diode	Dual, 13.7..14.3V, Izt=5mA, Zzt=10Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
Um	-	BD45E285G-M	Vdet-IC	2.8V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
UM	-	74LVC1G06SE	CMOS-Log	Inverter (ODO)	SOT-353	28	Log19	6t	Di
UM	-	74LVC1G06W5	CMOS-Log	Inverter (ODO)	SOT-25	28	Log19	6t	Di
UM	-	BD45452G	Vdet-IC	4.5V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
UM	-	MCP1824T-1202E/OT	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-23-5	28yp	VR4	6g	Mcc
UM	-	SN74AUC1G125DCK	CMOS-Log	Bus buffer gate with 3-state output	SC-70-5	28	Log14	6g	Ti
UM-	-	PZU15DB2/DG	Z-diode	Dual, 14.34..14.98V, Izt=5mA, Zzt=15Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UMp	-	PZU15DB2/DG	Z-diode	Dual, 14.34..14.98V, Izt=5mA, Zzt=15Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UMt	-	PZU15DB2/DG	Z-diode	Dual, 14.34..14.98V, Izt=5mA, Zzt=15Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
UMW	-	PZU15DB2/DG	Z-diode	Dual, 14.34..14.98V, Izt=5mA, Zzt=15Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
Un	-	BD45E295G-M	Vdet-IC	2.9V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
UN	-	74LVC1G07SE	CMOS-Log	Noninverting buffer/driver (ODO)	SOT-353	28	Log8	6t	Di
UN	-	74LVC1G07W5	CMOS-Log	Noninverting buffer/driver (ODO)	SOT-25	28	Log8	6t	Di
UN	-	BD45442G	Vdet-IC	4.4V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
UN	-	SN74AUC1G126DCK	CMOS-Log	Bus buffer gate with 3-state output	SC-70-5	28	Log13	6g	Ti
UN-	-	PZU16DB2/DG	Z-diode	Dual, 15.85..16.51V, Izt=5mA, Zzt=20Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UN17	-	MIC2777-17BM5	Vdet-IC	Vcc&Vin detect, 1.69V±5%, ±Reset PPO	SOT-23-5	28xn	-	6g	Mcr
UN17	fb	MIC2777-17YM5	Vdet-IC	Vcc&Vin detect, 1.69V±5%, ±Reset PPO, Pb. Free	SOT-23-5	28xn	-	6g	Mcr
UN22	-	MIC2777-22BM5	Vdet-IC	Vcc&Vin detect, 2.25V±5%, ±Reset PPO	SOT-23-5	28xn	-	6g	Mcr
UN22	fb	MIC2777-22YM5	Vdet-IC	Vcc&Vin detect, 2.25V±5%, ±Reset PPO, Pb. Free	SOT-23-5	28xn	-	6g	Mcr
UN23	-	MIC2777-23BM5	Vdet-IC	Vcc&Vin detect, 2.34V±5%, ±Reset PPO	SOT-23-5	28xn	-	6g	Mcr
UN23	fb	MIC2777-23YM5	Vdet-IC	Vcc&Vin detect, 2.34V±5%, ±Reset PPO, Pb. Free	SOT-23-5	28xn	-	6g	Mcr
UN25	-	MIC2777-25BM5	Vdet-IC	Vcc&Vin detect, 2.53V±5%, ±Reset PPO	SOT-23-5	28xn	-	6g	Mcr
UN25	fb	MIC2777-25YM5	Vdet-IC	Vcc&Vin detect, 2.53V±5%, ±Reset PPO, Pb. Free	SOT-23-5	28xn	-	6g	Mcr
UN26	-	MIC2777-26BM5	Vdet-IC	Vcc&Vin detect, 2.67V±5%, ±Reset PPO	SOT-23-5	28xn	-	6g	Mcr
UN26	fb	MIC2777-26YM5	Vdet-IC	Vcc&Vin detect, 2.67V±5%, ±Reset PPO, Pb. Free	SOT-23-5	28xn	-	6g	Mcr
UN28	-	MIC2777-28BM5	Vdet-IC	Vcc&Vin detect, 2.81V±5%, ±Reset PPO	SOT-23-5	28xn	-	6g	Mcr
UN28	fb	MIC2777-28YM5	Vdet-IC	Vcc&Vin detect, 2.81V±5%, ±Reset PPO, Pb. Free	SOT-23-5	28xn	-	6g	Mcr
UN29	-	MIC2777-29BM5	Vdet-IC	Vcc&Vin detect, 2.93V±5%, ±Reset PPO	SOT-23-5	28xn	-	6g	Mcr
UN29	fb	MIC2777-29YM5	Vdet-IC	Vcc&Vin detect, 2.93V±5%, ±Reset PPO, Pb. Free	SOT-23-5	28xn	-	6g	Mcr
UN31	-	MIC2777-31BM5	Vdet-IC	Vcc&Vin detect, 3..9V±5%, ±Reset PPO	SOT-23-5	28xn	-	6g	Mcr
UN31	fb	MIC2777-31YM5	Vdet-IC	Vcc&Vin detect, 3..9V±5%, ±Reset PPO, Pb. Free	SOT-23-5	28xn	-	6g	Mcr
UN44	-	MIC2777-44BM5	Vdet-IC	Vcc&Vin detect, 4.43V±5%, ±Reset PPO	SOT-23-5	28xn	-	6g	Mcr
UN44	fb	MIC2777-44YM5	Vdet-IC	Vcc&Vin detect, 4.43V±5%, ±Reset PPO, Pb. Free	SOT-23-5	28xn	-	6g	Mcr
UN46	-	MIC2777-46BM5	Vdet-IC	Vcc&Vin detect, 4.68V±5%, ±Reset PPO	SOT-23-5	28xn	-	6g	Mcr
UN46	fb	MIC2777-46YM5	Vdet-IC	Vcc&Vin detect, 4.68V±5%, ±Reset PPO, Pb. Free	SOT-23-5	28xn	-	6g	Mcr
UNp	-	PZU16DB2/DG	Z-diode	Dual, 15.85..16.51V, Izt=5mA, Zzt=20Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UNt	-	PZU16DB2/DG	Z-diode	Dual, 15.85..16.51V, Izt=5mA, Zzt=20Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
UNW	-	PZU16DB2/DG	Z-diode	Dual, 15.85..16.51V, Izt=5mA, Zzt=20Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
UO	-	AX6608-22A	LVR-IC	LDO, 2.2V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
Up	-	BD45E305G-M	Vdet-IC	3.0V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
UP	-	74LVC1G14SE	CMOS-Log	Inverting Schmitt-trigger	SOT-353	28	Log7	6t	Di
UP	-	74LVC1G14W5	CMOS-Log	Inverting Schmitt-trigger	SOT-25	28	Log7	6t	Di
UP	-	BD45432G	Vdet-IC	4.3V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
UP	-	MCP1824T-1802E/OT	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28yp	VR4	6g	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UP-	-	PZU18DB2/DG	Z-diode	Dual, 17.56..18.35V, Izt=5mA, Zzt=20Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UPp	-	PZU18DB2/DG	Z-diode	Dual, 17.56..18.35V, Izt=5mA, Zzt=20Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UPt	-	PZU18DB2/DG	Z-diode	Dual, 17.56..18.35V, Izt=5mA, Zzt=20Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
UPW	-	PZU18DB2/DG	Z-diode	Dual, 17.56..18.35V, Izt=5mA, Zzt=20Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
UQ	-	BD45422G	Vdet-IC	4.2V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
UQ	-	MCP1824T-2502E/OT	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28yp	VR4	6g	Mcc
Ur	-	BD45E315G-M	Vdet-IC	3.1V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
UR	-	74LVC1G17SE	CMOS-Log	Schmitt-trigger	SOT-353	28	Log11	6t	Di
UR	-	74LVC1G17W5	CMOS-Log	Schmitt-trigger	SOT-25	28	Log11	6t	Di
UR	-	BD45412G	Vdet-IC	4.1V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
UR	-	MCP1824T-3002E/OT	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28yp	VR4	6g	Mcc
UR-	-	PZU20DB2/DG	Z-diode	Dual, 19.52..20.39V, Izt=5mA, Zzt=20Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
URp	-	PZU20DB2/DG	Z-diode	Dual, 19.52..20.39V, Izt=5mA, Zzt=20Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
URt	-	PZU20DB2/DG	Z-diode	Dual, 19.52..20.39V, Izt=5mA, Zzt=20Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
URW	-	PZU20DB2/DG	Z-diode	Dual, 19.52..20.39V, Izt=5mA, Zzt=20Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
US	-	74LVC1G00SE	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6t	Di
US	-	74LVC1G00W5	CMOS-Log	2-input NAND gate	SOT-25	28	Log1	6t	Di
US	-	AX6608-16A	LVR-IC	LDO, 1.6V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
US	-	AX6608-16B	LVR-IC	LDO, 1.6V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
US	-	BD45402G	Vdet-IC	4.0V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
US	-	MCP1824T-3302E/OT	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28yp	VR4	6g	Mcc
US-	-	PZU22DB2/DG	Z-diode	Dual, 21.54..22.47V, Izt=5mA, Zzt=25Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
USp	-	PZU22DB2/DG	Z-diode	Dual, 21.54..22.47V, Izt=5mA, Zzt=25Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
USt	-	PZU22DB2/DG	Z-diode	Dual, 21.54..22.47V, Izt=5mA, Zzt=25Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
USW	-	PZU22DB2/DG	Z-diode	Dual, 21.54..22.47V, Izt=5mA, Zzt=25Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
UT	-	74LVC1G02SE	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6t	Di
UT	-	74LVC1G02W5	CMOS-Log	2-input NOR gate	SOT-25	28	Log2	6t	Di
UT	-	AX6608-24A	LVR-IC	LDO, 2.4V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
UT	-	AX6608-24B	LVR-IC	LDO, 2.4V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
UT	-	BD45392G	Vdet-IC	3.9V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
UT	-	MCP1824T-5002E/OT	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-23-5	28yp	VR4	6g	Mcc
UT-	-	PZU24DB2/DG	Z-diode	Dual, 23.72..24.78V, Izt=5mA, Zzt=30Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UTp	-	PZU24DB2/DG	Z-diode	Dual, 23.72..24.78V, Izt=5mA, Zzt=30Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxH
UTt	-	PZU24DB2/DG	Z-diode	Dual, 23.72..24.78V, Izt=5mA, Zzt=30Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxM
UTW	-	PZU24DB2/DG	Z-diode	Dual, 23.72..24.78V, Izt=5mA, Zzt=30Ω, 250mW, Halogen free	SOT-353	28ds	-	6a	NxC
UU	-	74LVC1G04SE	CMOS-Log	Inverter	SOT-353	28	Log6	6t	Di
UU	-	74LVC1G04W5	CMOS-Log	Inverter	SOT-25	28	Log6	6t	Di
UU	-	AX6608-32A	LVR-IC	LDO, 3.2V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
UU	-	AX6608-32B	LVR-IC	LDO, 3.2V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
UU	-	BD45382G	Vdet-IC	3.8V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
Uv	-	AX6608-23A	LVR-IC	LDO, 2.3V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
Uv	-	AX6608-23B	LVR-IC	LDO, 2.3V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
UV	-	74LVC1G08SE	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6t	Di
UV	-	74LVC1G08W5	CMOS-Log	2-input AND gate	SOT-25	28	Log3	6t	Di
UV	-	BD45372G	Vdet-IC	3.7V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
Uw	-	AX6608-27A	LVR-IC	LDO, 2.7V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
UW	-	74LVC1G32SE	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6t	Di
UW	-	74LVC1G32W5	CMOS-Log	2-input OR gate	SOT-25	28	Log4	6t	Di
UW	-	BD45362G	Vdet-IC	3.6V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
Ux	-	AX6608-31A	LVR-IC	LDO, 3.1V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
Ux	-	AX6608-31B	LVR-IC	LDO, 3.1V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
UX	-	74LVC1G86SE	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353	28	Log5	6t	Di
UX	-	74LVC1G86W5	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-25	28	Log5	6t	Di
UX	-	AX6608-17A	LVR-IC	LDO, 1.7V±3%, 300mA, +CE	SC-70-5L	28vrx	VR7	6k	Axl
UX	-	AX6608-17B	LVR-IC	LDO, 1.7V±3%, 300mA, +CE	SOT-23-5	28vrx	VR7	6k	Axl
UX	-	BD45352G	Vdet-IC	3.5V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
Uy	-	BD45E325G-M	Vdet-IC	3.2V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
UY	-	74LVC1G125SE	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log14	6t	Di
UY	-	74LVC1G125W5	CMOS-Log	Bus buffer gate with 3-state output	SOT-25	28	Log14	6t	Di
UY	-	BD45342G	Vdet-IC	3.4V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
UZ	-	74LVC1G126SE	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log13	6t	Di
UZ	-	74LVC1G126W5	CMOS-Log	Bus buffer gate with 3-state output	SOT-25	28	Log13	6t	Di
UZ	-	BD45332G	Vdet-IC	3.3V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
V0	-	MC74VHC1G01DF	CMOS-Log	2-input NAND gate (ODO)	SOT-353	28	Log17	6b	Ons
V0	-	MC74VHC1G01DT	CMOS-Log	2-input NAND gate (ODO)	SOT-23-5	28	Log17	6b	Ons
V0	-	TC74A0-3.3VCT	Tdet-IC	Sensor (-40..+125±3°C), Vcc=3.3V, I2C-bus	SOT-23-5	28hd	-	6g	Mcc
V00	-	74LVC1G00GV	CMOS-Log	2-input NAND gate	SOT753	28	Log1	6a	Nxp
V009	-	R3111Q092C	Vdet-IC	0.9V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V010	-	R3111Q102C	Vdet-IC	1.0V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V011	-	R3111Q112C	Vdet-IC	1.1V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V012	-	R3111Q122C	Vdet-IC	1.2V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V013	-	R3111Q132C	Vdet-IC	1.3V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V014	-	R3111Q142C	Vdet-IC	1.4V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V015	-	R3111Q152C	Vdet-IC	1.5V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V016	-	R3111Q162C	Vdet-IC	1.6V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V017	-	R3111Q172C	Vdet-IC	1.7V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V018	-	R3111Q182C	Vdet-IC	1.8V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V019	-	R3111Q192C	Vdet-IC	1.9V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V02	-	74LVC1G02GV	CMOS-Log	2-input NOR gate	SOT753	28	Log2	6a	Nxp
V020	-	R3111Q202C	Vdet-IC	2.0V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V021	-	R3111Q212C	Vdet-IC	2.1V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V022	-	R3111Q222C	Vdet-IC	2.2V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V023	-	R3111Q232C	Vdet-IC	2.3V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V024	-	R3111Q242C	Vdet-IC	2.4V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V025	-	R3111Q252C	Vdet-IC	2.5V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V026	-	R3111Q262C	Vdet-IC	2.6V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V027	-	R3111Q272C	Vdet-IC	2.7V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V028	-	R3111Q282C	Vdet-IC	2.8V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V029	-	R3111Q292C	Vdet-IC	2.9V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V030	-	R3111Q302C	Vdet-IC	3.0V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V031	-	R3111Q312C	Vdet-IC	3.1V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V032	-	R3111Q322C	Vdet-IC	3.2V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V033	-	R3111Q332C	Vdet-IC	3.3V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V034	-	R3111Q342C	Vdet-IC	3.4V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V035	-	R3111Q352C	Vdet-IC	3.5V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V036	-	R3111Q362C	Vdet-IC	3.6V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V037	-	R3111Q372C	Vdet-IC	3.7V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V038	-	R3111Q382C	Vdet-IC	3.8V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V039	-	R3111Q392C	Vdet-IC	3.9V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V04	-	74LVC1G04GV	CMOS-Log	Inverter	SOT753	28	Log6	6a	Nxp
V040	-	R3111Q402C	Vdet-IC	4.0V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V041	-	R3111Q412C	Vdet-IC	4.1V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V042	-	R3111Q422C	Vdet-IC	4.2V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V043	-	R3111Q432C	Vdet-IC	4.3V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V044	-	R3111Q442C	Vdet-IC	4.4V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V045	-	R3111Q452C	Vdet-IC	4.5V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V046	-	R3111Q462C	Vdet-IC	4.6V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V047	-	R3111Q472C	Vdet-IC	4.7V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V048	-	R3111Q482C	Vdet-IC	4.8V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V049	-	R3111Q492C	Vdet-IC	4.9V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V050	-	R3111Q502C	Vdet-IC	5.0V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V051	-	R3111Q512C	Vdet-IC	5.1V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V052	-	R3111Q522C	Vdet-IC	5.2V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V053	-	R3111Q532C	Vdet-IC	5.3V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V054	-	R3111Q542C	Vdet-IC	5.4V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V055	-	R3111Q552C	Vdet-IC	5.5V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V056	-	R3111Q562C	Vdet-IC	5.6V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V057	-	R3111Q572C	Vdet-IC	5.7V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V058	-	R3111Q582C	Vdet-IC	5.8V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V059	-	R3111Q592C	Vdet-IC	5.9V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V06	-	74LVC1G06GV	CMOS-Log	Inverter (ODO)	SOT753	28	Log19	6a	Nxp
V060	-	R3111Q602C	Vdet-IC	6.0V±2%, -Reset ODO	SC-88A	28ru	VD6	6ma	Ric
V07	-	74LVC1G07GV	CMOS-Log	Noninverting buffer/driver (ODO)	SOT753	28	Log8	6a	Nxp
V08	-	74LVC1G08GV	CMOS-Log	2-input AND gate	SOT753	28	Log3	6a	Nxp
V09	ef	XC9227A096M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 0.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V09	ei	XC9227B096M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 0.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V09	en	XC9227C096M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 0.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V09	er	XC9227D096M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 0.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V0A	-	R3119N023A	Vdet-IC	2.3V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0A	-	XC6118N20AMR-G	Vdet-IC	2.0V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
V0B	-	R3119N024A	Vdet-IC	2.4V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0B	-	XC6118N20BMR-G	Vdet-IC	2.0V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
V0C	-	R3119N025A	Vdet-IC	2.5V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0C	-	XC6118N20CMR-G	Vdet-IC	2.0V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
V0D	-	R3119N026A	Vdet-IC	2.6V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0D	-	XC6118N20DMR-G	Vdet-IC	2.0V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
V0E	-	R3119N027A	Vdet-IC	2.7V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0F	-	R3119N028A	Vdet-IC	2.8V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0G	-	R3119N029A	Vdet-IC	2.9V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0H	-	R3119N030A	Vdet-IC	3.0V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V0J	-	R3119N031A	Vdet-IC	3.1V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0K	-	R3119N032A	Vdet-IC	3.2V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0L	-	R3119N033A	Vdet-IC	3.3V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0M	-	R3119N034A	Vdet-IC	3.4V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0M	ef	XC9227A09CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 0.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V0M	ei	XC9227B09CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 0.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V0M	en	XC9227C09CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 0.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V0M	er	XC9227D09CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 0.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V0N	-	R3119N035A	Vdet-IC	3.5V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0P	-	R3119N036A	Vdet-IC	3.6V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0R	-	R3119N037A	Vdet-IC	3.7V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0S	-	R3119N038A	Vdet-IC	3.8V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0T	-	R3119N039A	Vdet-IC	3.9V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0U	-	R3119N040A	Vdet-IC	4.0V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0V	-	R3119N041A	Vdet-IC	4.1V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0W	-	R3119N042A	Vdet-IC	4.2V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0X	-	R3119N043A	Vdet-IC	4.3V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0Y	-	R3119N044A	Vdet-IC	4.4V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V0Z	-	R3119N045A	Vdet-IC	4.5V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
V1	-	BD45312G	Vdet-IC	3.1V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
V1	-	MC74VHC1G00DF	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6b	Ons
V1	-	MC74VHC1G00DT	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6b	Ons
V1	-	NL17SZ16DF	CMOS-Log	Noninverting buffer	SC-70-5	28	Log10	6b	Ons
V1	-	NL17SZ17DF	CMOS-Log	Schmitt-trigger	SC-70-5	28	Log11	6b	Ons
V1	-	TC74A1-3.3VCT	Tdet-IC	Sensor (-40..+125±3°C), Vcc=3.3V, I2C-bus	SOT-23-5	28hd	-	6g	Mcc
V1	-	TC7SA00F	CMOS-Log	2-input NAND gate	SSOP-5	28	Log1	6a	Tos
V1	-	TC7SA00FU	CMOS-Log	2-input NAND gate	SC-70-5	28	Log1	6a	Tos
V10	ef	XC9227A106M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V10	ei	XC9227B106M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V10	en	XC9227C106M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V10	er	XC9227D106M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V11	ef	XC9227A116M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V11	ei	XC9227B116M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V11	en	XC9227C116M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V11	er	XC9227D116M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V11A	-	FC6201P113M	LVR-IC	1.1V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V11A	-	ML6201P113M	LVR-IC	1.1V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V12	ef	XC9227A126M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V12	ei	XC9227B126M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V12	en	XC9227C126M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V12	er	XC9227D126M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V12A	-	FC6201P123M	LVR-IC	1.2V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V12A	-	ML6201P123M	LVR-IC	1.2V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V13	ef	XC9227A136M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V13	ei	XC9227B136M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V13	en	XC9227C136M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V13	er	XC9227D136M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V13A	-	FC6201P133M	LVR-IC	1.3V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V13A	-	ML6201P133M	LVR-IC	1.3V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V14	-	74LVC1G14GV	CMOS-Log	Inverting Schmitt-trigger	SOT753	28	Log7	6a	Nxp
V14	ef	XC9227A146M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V14	ei	XC9227B146M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V14	en	XC9227C146M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V14	er	XC9227D146M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V14A	-	FC6201P143M	LVR-IC	1.4V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V14A	-	ML6201P143M	LVR-IC	1.4V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V15	-	R1163N151B	LVR-IC	LDO, 1.5V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V15	eb	XC9110C151MR	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V15	ef	XC9227A156M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V15	ei	XC9227B156M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V15	en	XC9227C156M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V15	er	XC9227D156M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V15A	-	FC6201P153M	LVR-IC	1.5V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V15A	-	ML6201P153M	LVR-IC	1.5V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V16	-	R1163N161B	LVR-IC	LDO, 1.6V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V16	eb	XC9110C161MR	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V16	ef	XC9227A166M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V16	ei	XC9227B166M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V16	en	XC9227C166M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V16	er	XC9227D166M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V16A	-	FC6201P163M	LVR-IC	1.6V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V16A	-	ML6201P163M	LVR-IC	1.6V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V16C	-	SS6680C-16CV	Vdet-IC	1.6V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V16N	-	SS6680N-16CV	Vdet-IC	1.6V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V16P	-	SS6680P-16CV	Vdet-IC	1.6V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V17	-	74LVC1G17GV	CMOS-Log	Schmitt-trigger	SOT753	28	Log11	6a	Nxp
V17	-	R1163N171B	LVR-IC	LDO, 1.7V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V17	eb	XC9110C171MR	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V17	ef	XC9227A176M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V17	ei	XC9227B176M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V17	en	XC9227C176M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V17	er	XC9227D176M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V17A	-	FC6201P173M	LVR-IC	1.7V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V17A	-	ML6201P173M	LVR-IC	1.7V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V17C	-	SS6680C-17CV	Vdet-IC	1.7V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V17N	-	SS6680N-17CV	Vdet-IC	1.7V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V17P	-	SS6680P-17CV	Vdet-IC	1.7V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V18	-	R1163N181B	LVR-IC	LDO, 1.8V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V18	eb	XC9110C181MR	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V18	ef	XC9227A186M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V18	ei	XC9227B186M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V18	en	XC9227C186M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V18	er	XC9227D186M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V18A	-	FC6201P183M	LVR-IC	1.8V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V18A	-	ML6201P183M	LVR-IC	1.8V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V18C	-	SS6680C-18CV	Vdet-IC	1.8V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V18N	-	SS6680N-18CV	Vdet-IC	1.8V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V18P	-	SS6680P-18CV	Vdet-IC	1.8V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V19	-	R1163N191B	LVR-IC	LDO, 1.9V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V19	eb	XC9110C191MR	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V19	ef	XC9227A196M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V19	ei	XC9227B196M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V19	en	XC9227C196M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V19	er	XC9227D196M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V19A	-	FC6201P193M	LVR-IC	1.9V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V19A	-	ML6201P193M	LVR-IC	1.9V±3%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V19C	-	SS6680C-19CV	Vdet-IC	1.9V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V19N	-	SS6680N-19CV	Vdet-IC	1.9V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V19P	-	SS6680P-19CV	Vdet-IC	1.9V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V1A	-	R3119N023E	Vdet-IC	2.3V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1A	-	XC6118N21AMR-G	Vdet-IC	2.1V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
V1A	ef	XC9227A10CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V1A	ei	XC9227B10CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V1A	en	XC9227C10CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V1A	er	XC9227D10CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V1B	-	R3119N024E	Vdet-IC	2.4V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1B	-	XC6118N21BMR-G	Vdet-IC	2.1V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
V1B	ef	XC9227A11CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V1B	ei	XC9227B11CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V1B	en	XC9227C11CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V1B	er	XC9227D11CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V1C	-	R3119N025E	Vdet-IC	2.5V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1C	-	XC6118N21CMR-G	Vdet-IC	2.1V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
V1C	ef	XC9227A12CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V1C	ei	XC9227B12CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V1C	en	XC9227C12CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V1C	er	XC9227D12CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V1D	-	R3119N026E	Vdet-IC	2.6V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1D	-	XC6118N21DMR-G	Vdet-IC	2.1V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
V1D	ef	XC9227A13CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V1D	ei	XC9227B13CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V1D	en	XC9227C13CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V1D	er	XC9227D13CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V1E	-	R3119N027E	Vdet-IC	2.7V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1E	ef	XC9227A14CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V1E	ei	XC9227B14CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V1E	en	XC9227C14CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V1E	er	XC9227D14CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V1F	-	R3119N028E	Vdet-IC	2.8V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1F	ef	XC9227A15CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V1F	ei	XC9227B15CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V1F	en	XC9227C15CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V1F	er	XC9227D15CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V1G	-	R3119N029E	Vdet-IC	2.9V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1H	-	R3119N030E	Vdet-IC	3.0V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1H	ef	XC9227A16CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V1H	ei	XC9227B16CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V1H	en	XC9227C16CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V1H	er	XC9227D16CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V1J	-	R3119N031E	Vdet-IC	3.1V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1K	-	R3119N032E	Vdet-IC	3.2V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1K	ef	XC9227A17CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V1K	ei	XC9227B17CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V1K	en	XC9227C17CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V1K	er	XC9227D17CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V1L	-	R3119N033E	Vdet-IC	3.3V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1L	ef	XC9227A18CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V1L	ei	XC9227B18CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V1L	en	XC9227C18CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V1L	er	XC9227D18CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V1M	-	R3119N034E	Vdet-IC	3.4V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1M	ef	XC9227A19CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V1M	ei	XC9227B19CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V1M	en	XC9227C19CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V1M	er	XC9227D19CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V1N	-	R3119N035E	Vdet-IC	3.5V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1P	-	R3119N036E	Vdet-IC	3.6V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1R	-	R3119N037E	Vdet-IC	3.7V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1S	-	R3119N038E	Vdet-IC	3.8V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1T	-	R3119N039E	Vdet-IC	3.9V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1U	-	R3119N040E	Vdet-IC	4.0V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1V	-	R3119N041E	Vdet-IC	4.1V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1W	-	R3119N042E	Vdet-IC	4.2V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1X	-	R3119N043E	Vdet-IC	4.3V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1Y	-	R3119N044E	Vdet-IC	4.4V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V1Z	-	R3119N045E	Vdet-IC	4.5V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
V2	-	BD45302G	Vdet-IC	3.0V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
V2	-	MC74VHC1G08DF	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6b	Ons
V2	-	MC74VHC1G08DT	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6b	Ons
V2	-	TC74A2-3.3VCT	Tdet-IC	Sensor (-40..+125±3°C), Vcc=3.3V, I2C-bus	SOT-23-5	28hd	-	6g	Mcc
V2	-	TC7SA08F	CMOS-Log	2-input AND gate	SSOP-5	28	Log3	6a	Tos
V2	-	TC7SA08FU	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6a	Tos
V20	-	R1163N201B	LVR-IC	LDO, 2.0V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V20	eb	XC9110C201MR	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V20	ef	XC9227A206M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V20	eh	XC6383F201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V20	ei	XC9227B206M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V20	en	XC9227C206M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V20	er	XC9227D206M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V20A	-	FC6201P202M	LVR-IC	2.0V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V20A	-	ML6201P202M	LVR-IC	2.0V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V20C	-	SS6680C-20CV	Vdet-IC	2.0V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V20N	-	SS6680N-20CV	Vdet-IC	2.0V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V20P	-	SS6680P-20CV	Vdet-IC	2.0V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V21	-	R1163N211B	LVR-IC	LDO, 2.1V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V21	eb	XC9110C211MR	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V21	ef	XC9227A216M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V21	eh	XC6383F211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V21	ei	XC9227B216M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V21	en	XC9227C216M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V21	er	XC9227D216M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V21A	-	FC6201P212M	LVR-IC	2.1V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V21A	-	ML6201P212M	LVR-IC	2.1V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V21C	-	SS6680C-21CV	Vdet-IC	2.1V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V21N	-	SS6680N-21CV	Vdet-IC	2.1V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V21P	-	SS6680P-21CV	Vdet-IC	2.1V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V22	-	R1163N221B	LVR-IC	LDO, 2.2V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V22	eb	XC9110C221MR	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V22	ef	XC9227A226M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V22	eh	XC6383F221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V22	ei	XC9227B226M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V22	en	XC9227C226M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V22	er	XC9227D226M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V22A	-	FC6201P222M	LVR-IC	2.2V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V22A	-	ML6201P222M	LVR-IC	2.2V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V22C	-	SS6680C-22CV	Vdet-IC	2.2V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V22N	-	SS6680N-22CV	Vdet-IC	2.2V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V22P	-	SS6680P-22CV	Vdet-IC	2.2V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V23	-	R1163N231B	LVR-IC	LDO, 2.3V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V23	eb	XC9110C231MR	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V23	ef	XC9227A236M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V23	eh	XC6383F231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V23	ei	XC9227B236M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V23	en	XC9227C236M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V23	er	XC9227D236M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V23A	-	FC6201P232M	LVR-IC	2.3V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V23A	-	ML6201P232M	LVR-IC	2.3V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V23C	-	SS6680C-23CV	Vdet-IC	2.3V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V23N	-	SS6680N-23CV	Vdet-IC	2.3V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V23P	-	SS6680P-23CV	Vdet-IC	2.3V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V24	-	R1163N241B	LVR-IC	LDO, 2.4V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V24	eb	XC9110C241MR	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V24	ef	XC9227A246M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V24	eh	XC6383F241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V24	ei	XC9227B246M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V24	en	XC9227C246M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V24	er	XC9227D246M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V24A	-	FC6201P242M	LVR-IC	2.4V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V24A	-	ML6201P242M	LVR-IC	2.4V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V24C	-	SS6680C-24CV	Vdet-IC	2.4V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V24N	-	SS6680N-24CV	Vdet-IC	2.4V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V24P	-	SS6680P-24CV	Vdet-IC	2.4V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V25	-	74LVC1G125GV	CMOS-Log	Bus buffer gate with 3-state output	SOT753	28	Log14	6a	Nxp
V25	-	R1163N251B	LVR-IC	LDO, 2.5V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V25	-	SN74CBTLV1G125DBV	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log14	6g	Ti
V25	eb	XC9110C251MR	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V25	ef	XC9227A256M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V25	eh	XC6383F251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V25	ei	XC9227B256M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V25	en	XC9227C256M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V25	er	XC9227D256M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V25A	-	FC6201P252M	LVR-IC	2.5V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V25A	-	ML6201P252M	LVR-IC	2.5V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V25C	-	SS6680C-25CV	Vdet-IC	2.5V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V25N	-	SS6680N-25CV	Vdet-IC	2.5V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V25P	-	SS6680P-25CV	Vdet-IC	2.5V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V26	-	74LVC1G126GV	CMOS-Log	Bus buffer gate with 3-state output	SOT753	28	Log13	6a	Nxp
V26	-	R1163N261B	LVR-IC	LDO, 2.6V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V26	eb	XC9110C261MR	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V26	ef	XC9227A266M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V26	eh	XC6383F261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V26	ei	XC9227B266M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V26	en	XC9227C266M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V26	er	XC9227D266M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V26A	-	FC6201P262M	LVR-IC	2.6V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V26A	-	ML6201P262M	LVR-IC	2.6V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V26C	-	SS6680C-26CV	Vdet-IC	2.6V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V26N	-	SS6680N-26CV	Vdet-IC	2.6V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V26P	-	SS6680P-26CV	Vdet-IC	2.6V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V27	-	R1163N271B	LVR-IC	LDO, 2.7V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V27	eb	XC9110C271MR	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V27	ef	XC9227A276M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V27	eh	XC6383F271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V27	ei	XC9227B276M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V27	en	XC9227C276M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V27	er	XC9227D276M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V27A	-	FC6201P272M	LVR-IC	2.7V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V27A	-	ML6201P272M	LVR-IC	2.7V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V27C	-	SS6680C-27CV	Vdet-IC	2.7V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V27N	-	SS6680N-27CV	Vdet-IC	2.7V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V27P	-	SS6680P-27CV	Vdet-IC	2.7V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V28	-	R1163N281B	LVR-IC	LDO, 2.8V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V28	eb	XC9110C281MR	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V28	ef	XC9227A286M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V28	eh	XC6383F281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V28	ei	XC9227B286M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V28	en	XC9227C286M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V28	er	XC9227D286M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V28A	-	FC6201P282M	LVR-IC	2.8V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V28A	-	ML6201P282M	LVR-IC	2.8V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V28C	-	SS6680C-28CV	Vdet-IC	2.8V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V28N	-	SS6680N-28CV	Vdet-IC	2.8V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V28P	-	SS6680P-28CV	Vdet-IC	2.8V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V29	-	R1163N291B	LVR-IC	LDO, 2.9V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V29	eb	XC9110C291MR	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V29	ef	XC9227A296M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V29	eh	XC6383F291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V29	ei	XC9227B296M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V29	en	XC9227C296M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V29	er	XC9227D296M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V29A	-	FC6201P292M	LVR-IC	2.9V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V29A	-	ML6201P292M	LVR-IC	2.9V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V29C	-	SS6680C-29CV	Vdet-IC	2.9V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V29N	-	SS6680N-29CV	Vdet-IC	2.9V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V29P	-	SS6680P-29CV	Vdet-IC	2.9V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V2A	-	XC6118N22AMR-G	Vdet-IC	2.2V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
V2A	ef	XC9227A20CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V2A	ei	XC9227B20CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V2A	en	XC9227C20CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V2A	er	XC9227D20CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V2B	-	XC6118N22BMR-G	Vdet-IC	2.2V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
V2B	ef	XC9227A21CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V2B	ei	XC9227B21CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V2B	en	XC9227C21CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V2B	er	XC9227D21CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V2C	-	XC6118N22CMR-G	Vdet-IC	2.2V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
V2C	ef	XC9227A22CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V2C	ei	XC9227B22CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V2C	en	XC9227C22CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V2C	er	XC9227D22CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V2D	-	XC6118N22DMR-G	Vdet-IC	2.2V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
V2D	ef	XC9227A23CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V2D	ei	XC9227B23CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V2D	en	XC9227C23CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V2D	er	XC9227D23CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V2E	ef	XC9227A24CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V2E	ei	XC9227B24CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V2E	en	XC9227C24CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V2E	er	XC9227D24CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V2F	ef	XC9227A25CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V2F	ei	XC9227B25CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V2F	en	XC9227C25CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V2F	er	XC9227D25CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V2H	ef	XC9227A26CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V2H	ei	XC9227B26CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V2H	en	XC9227C26CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V2H	er	XC9227D26CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V2K	ef	XC9227A27CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V2K	ei	XC9227B27CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V2K	en	XC9227C27CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V2K	er	XC9227D27CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V2L	ef	XC9227A28CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V2L	ei	XC9227B28CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V2L	en	XC9227C28CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V2L	er	XC9227D28CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V2M	ef	XC9227A29CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V2M	ei	XC9227B29CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V2M	en	XC9227C29CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V2M	er	XC9227D29CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3	-	BD45292G	Vdet-IC	2.9V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V3	-	MC74VHC1G02DF	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6b	Ons
V3	-	MC74VHC1G02DT	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6b	Ons
V3	-	RT9167A-2HCB	LVR-IC	LDO, 2.85V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
V3	-	TC74A3-3.3VCT	Tdet-IC	Sensor (-40..+125±3°C), Vcc=3.3V, I2C-bus	SOT-23-5	28hd	-	6g	Mcc
V3-	-	RT9167A-2HPB	LVR-IC	LDO, 2.85V±2%, 600mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
V30	-	R1163N301B	LVR-IC	LDO, 3.0V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V30	eb	XC9110C301MR	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V30	ef	XC9227A306M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V30	eh	XC6383F301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V30	ei	XC9227B306M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V30	em	XC9227F306M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.0V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V30	en	XC9227C306M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V30	eo	XC9227H306M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.0V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V30	ep	XC9227G306M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.0V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V30	eq	XC9227E306M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.0V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V30	er	XC9227D306M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V30A	-	FC6201P302M	LVR-IC	3.0V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V30A	-	ML6201P302M	LVR-IC	3.0V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V30C	-	SS6680C-30CV	Vdet-IC	3.0V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V30N	-	SS6680N-30CV	Vdet-IC	3.0V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V30P	-	SS6680P-30CV	Vdet-IC	3.0V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V31	-	R1163N311B	LVR-IC	LDO, 3.1V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V31	eb	XC9110C311MR	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V31	ef	XC9227A316M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V31	eh	XC6383F311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V31	ei	XC9227B316M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V31	em	XC9227F316M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.1V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V31	en	XC9227C316M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V31	eo	XC9227H316M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.1V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V31	ep	XC9227G316M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.1V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V31	eq	XC9227E316M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.1V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V31	er	XC9227D316M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V31A	-	FC6201P312M	LVR-IC	3.1V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V31A	-	ML6201P312M	LVR-IC	3.1V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V31C	-	SS6680C-31CV	Vdet-IC	3.1V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V31N	-	SS6680N-31CV	Vdet-IC	3.1V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V31P	-	SS6680P-31CV	Vdet-IC	3.1V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V32	-	74LVC1G32GV	CMOS-Log	2-input OR gate	SOT753	28	Log4	6a	Nxp
V32	-	NC7SV32P5	CMOS-Log	2-input OR gate	SC-70-5	28	Log4	6a	F
V32	-	R1163N321B	LVR-IC	LDO, 3.2V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V32	eb	XC9110C321MR	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V32	ef	XC9227A326M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V32	eh	XC6383F321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V32	ei	XC9227B326M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V32	em	XC9227F326M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.2V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V32	en	XC9227C326M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V32	eo	XC9227H326M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.2V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V32	ep	XC9227G326M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.2V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V32	eq	XC9227E326M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.2V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V32	er	XC9227D326M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V32A	-	FC6201P322M	LVR-IC	3.2V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V32A	-	ML6201P322M	LVR-IC	3.2V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V32C	-	SS6680C-32CV	Vdet-IC	3.2V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V32N	-	SS6680N-32CV	Vdet-IC	3.2V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V32P	-	SS6680P-32CV	Vdet-IC	3.2V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V33	-	R1163N331B	LVR-IC	LDO, 3.3V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V33	eb	XC9110C331MR	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V33	ef	XC9227A336M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V33	eh	XC6383F331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V33	ei	XC9227B336M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V33	em	XC9227F336M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.3V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V33	en	XC9227C336M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V33	eo	XC9227H336M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.3V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V33	ep	XC9227G336M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.3V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V33	eq	XC9227E336M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.3V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V33	er	XC9227D336M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V33A	-	FC6201P332M	LVR-IC	3.3V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V33A	-	ML6201P332M	LVR-IC	3.3V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V33C	-	SS6680C-33CV	Vdet-IC	3.3V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V33N	-	SS6680N-33CV	Vdet-IC	3.3V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V33P	-	SS6680P-33CV	Vdet-IC	3.3V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V34	-	R1163N341B	LVR-IC	LDO, 3.4V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V34	eb	XC9110C341MR	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V34	ef	XC9227A346M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V34	eh	XC6383F341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V34	ei	XC9227B346M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V34	em	XC9227F346M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.4V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V34	en	XC9227C346M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V34	eo	XC9227H346M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.4V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V34	ep	XC9227G346M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.4V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V34	eq	XC9227E346M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.4V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V34	er	XC9227D346M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V34A	-	FC6201P342M	LVR-IC	3.4V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V34A	-	ML6201P342M	LVR-IC	3.4V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V34C	-	SS6680C-34CV	Vdet-IC	3.4V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V34N	-	SS6680N-34CV	Vdet-IC	3.4V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V34P	-	SS6680P-34CV	Vdet-IC	3.4V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V35	-	R1163N351B	LVR-IC	LDO, 3.5V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V35	eb	XC9110C351MR	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V35	ef	XC9227A356M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V35	eh	XC6383F351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V35	ei	XC9227B356M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V35	em	XC9227F356M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.5V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V35	en	XC9227C356M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V35	eo	XC9227H356M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.5V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V35	ep	XC9227G356M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.5V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V35	eq	XC9227E356M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.5V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V35	er	XC9227D356M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V35A	-	FC6201P352M	LVR-IC	3.5V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V35A	-	ML6201P352M	LVR-IC	3.5V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V35C	-	SS6680C-35CV	Vdet-IC	3.5V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V35N	-	SS6680N-35CV	Vdet-IC	3.5V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V35P	-	SS6680P-35CV	Vdet-IC	3.5V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V36	-	R1163N361B	LVR-IC	LDO, 3.6V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V36	eb	XC9110C361MR	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V36	ef	XC9227A366M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V36	eh	XC6383F361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V36	ei	XC9227B366M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V36	em	XC9227F366M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.6V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V36	en	XC9227C366M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V36	eo	XC9227H366M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.6V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V36	ep	XC9227G366M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.6V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V36	eq	XC9227E366M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.6V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V36	er	XC9227D366M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V36A	-	FC6201P362M	LVR-IC	3.6V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V36A	-	ML6201P362M	LVR-IC	3.6V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V36C	-	SS6680C-36CV	Vdet-IC	3.6V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V36N	-	SS6680N-36CV	Vdet-IC	3.6V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V36P	-	SS6680P-36CV	Vdet-IC	3.6V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V37	-	R1163N371B	LVR-IC	LDO, 3.7V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V37	eb	XC9110C371MR	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V37	ef	XC9227A376M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V37	eh	XC6383F371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V37	ei	XC9227B376M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V37	em	XC9227F376M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.7V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V37	en	XC9227C376M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V37	eo	XC9227H376M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.7V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V37	ep	XC9227G376M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.7V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V37	eq	XC9227E376M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.7V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V37	er	XC9227D376M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V37A	-	FC6201P372M	LVR-IC	3.7V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V37A	-	ML6201P372M	LVR-IC	3.7V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V37C	-	SS6680C-37CV	Vdet-IC	3.7V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V37N	-	SS6680N-37CV	Vdet-IC	3.7V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V37P	-	SS6680P-37CV	Vdet-IC	3.7V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V38	-	R1163N381B	LVR-IC	LDO, 3.8V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V38	eb	XC9110C381MR	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V38	ef	XC9227A386M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V38	eh	XC6383F381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V38	ei	XC9227B386M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V38	em	XC9227F386M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.8V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V38	en	XC9227C386M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V38	eo	XC9227H386M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.8V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V38	ep	XC9227G386M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.8V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V38	eq	XC9227E386M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.8V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V38	er	XC9227D386M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V38A	-	FC6201P382M	LVR-IC	3.8V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V38A	-	ML6201P382M	LVR-IC	3.8V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V38C	-	SS6680C-38CV	Vdet-IC	3.8V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V38N	-	SS6680N-38CV	Vdet-IC	3.8V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V38P	-	SS6680P-38CV	Vdet-IC	3.8V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V39	-	R1163N391B	LVR-IC	LDO, 3.9V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V39	eb	XC9110C391MR	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V39	ef	XC9227A396M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V39	eh	XC6383F391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V39	ei	XC9227B396M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V39	em	XC9227F396M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.9V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V39	en	XC9227C396M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V39	eo	XC9227H396M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.9V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V39	ep	XC9227G396M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.9V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V39	eq	XC9227E396M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.9V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V39	er	XC9227D396M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V39A	-	FC6201P392M	LVR-IC	3.9V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V39A	-	ML6201P392M	LVR-IC	3.9V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V39C	-	SS6680C-39CV	Vdet-IC	3.9V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V39N	-	SS6680N-39CV	Vdet-IC	3.9V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V39P	-	SS6680P-39CV	Vdet-IC	3.9V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V3A	-	XC6118N23AMR-G	Vdet-IC	2.3V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
V3A	ef	XC9227A30CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3A	ei	XC9227B30CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3A	em	XC9227F30CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.0V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3A	en	XC9227C30CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3A	eo	XC9227H30CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.0V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3A	ep	XC9227G30CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.0V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3A	eq	XC9227E30CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.0V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3A	er	XC9227D30CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3B	-	XC6118N23BMR-G	Vdet-IC	2.3V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
V3B	ef	XC9227A31CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.1V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3B	ei	XC9227B31CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.1V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3B	em	XC9227F31CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.1V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3B	en	XC9227C31CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.1V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3B	eo	XC9227H31CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.1V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3B	ep	XC9227G31CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.1V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3B	eq	XC9227E31CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.1V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3B	er	XC9227D31CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.1V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3C	-	XC6118N23CMR-G	Vdet-IC	2.3V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
V3C	ef	XC9227A32CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.2V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3C	ei	XC9227B32CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.2V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3C	em	XC9227F32CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.2V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3C	en	XC9227C32CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.2V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3C	eo	XC9227H32CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.2V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3C	ep	XC9227G32CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.2V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3C	eq	XC9227E32CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.2V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3C	er	XC9227D32CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.2V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3D	-	XC6118N23DMR-G	Vdet-IC	2.3V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
V3D	ef	XC9227A33CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.3V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3D	ei	XC9227B33CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.3V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3D	em	XC9227F33CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.3V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3D	en	XC9227C33CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.3V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3D	eo	XC9227H33CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.3V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3D	ep	XC9227G33CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.3V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3D	eq	XC9227E33CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.3V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3D	er	XC9227D33CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.3V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3E	ef	XC9227A34CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.4V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3E	ei	XC9227B34CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.4V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3E	em	XC9227F34CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.4V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3E	en	XC9227C34CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.4V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3E	eo	XC9227H34CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.4V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3E	ep	XC9227G34CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.4V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3E	eq	XC9227E34CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.4V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V3E	er	XC9227D34CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.4V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3F	ef	XC9227A35CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.5V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3F	ei	XC9227B35CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.5V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3F	em	XC9227F35CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.5V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3F	en	XC9227C35CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.5V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3F	eo	XC9227H35CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.5V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3F	ep	XC9227G35CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.5V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3F	eq	XC9227E35CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.5V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3F	er	XC9227D35CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.5V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3H	ef	XC9227A36CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.6V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3H	ei	XC9227B36CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.6V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3H	em	XC9227F36CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.6V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3H	en	XC9227C36CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.6V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3H	eo	XC9227H36CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.6V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3H	ep	XC9227G36CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.6V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3H	eq	XC9227E36CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.6V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3H	er	XC9227D36CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.6V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3K	ef	XC9227A37CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.7V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3K	ei	XC9227B37CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.7V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3K	em	XC9227F37CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.7V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3K	en	XC9227C37CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.7V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3K	eo	XC9227H37CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.7V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3K	ep	XC9227G37CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.7V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3K	eq	XC9227E37CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.7V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3K	er	XC9227D37CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.7V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3L	ef	XC9227A38CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.8V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3L	ei	XC9227B38CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.8V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3L	em	XC9227F38CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.8V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3L	en	XC9227C38CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.8V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3L	eo	XC9227H38CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.8V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3L	ep	XC9227G38CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.8V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3L	eq	XC9227E38CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.8V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3L	er	XC9227D38CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.8V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3M	ef	XC9227A39CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.9V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3M	ei	XC9227B39CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.9V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3M	em	XC9227F39CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.9V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V3M	en	XC9227C39CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.9V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3M	eo	XC9227H39CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.9V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V3M	ep	XC9227G39CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.9V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V3M	eq	XC9227E39CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.9V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V3M	er	XC9227D39CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.9V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V4	-	BD45282G	Vdet-IC	2.8V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
V4	-	MC74VHC1G32DF	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6b	Ons
V4	-	MC74VHC1G32DT	CMOS-Log	2-input OR gate	SOT-23-5	28	Log4	6b	Ons
V4	-	TC74A4-3.3VCT	Tdet-IC	Sensor (-40..+125±3°C), Vcc=3.3V, I2C-bus	SOT-23-5	28hd	-	6g	Mcc
V40	-	R1163N401B	LVR-IC	LDO, 4.0V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V40	eb	XC9110C401MR	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V40	ef	XC9227A406M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 4.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V40	eh	XC6383F401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V40	ei	XC9227B406M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 4.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V40	em	XC9227F406M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 4.0V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V40	en	XC9227C406M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 4.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V40	eo	XC9227H406M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 4.0V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V40	ep	XC9227G406M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 4.0V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V40	eq	XC9227E406M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 4.0V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V40	er	XC9227D406M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 4.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V40A	-	FC6201P402M	LVR-IC	4.0V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V40A	-	ML6201P402M	LVR-IC	4.0V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V40C	-	SS6680C-40CV	Vdet-IC	4.0V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V40N	-	SS6680N-40CV	Vdet-IC	4.0V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V40P	-	SS6680P-40CV	Vdet-IC	4.0V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V41	-	R1163N181B5	LVR-IC	LDO, 1.85V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
V41	eb	XC9110C411MR	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V41	eh	XC6383F411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V41A	-	FC6201P412M	LVR-IC	4.1V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V41A	-	ML6201P412M	LVR-IC	4.1V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V41C	-	SS6680C-41CV	Vdet-IC	4.1V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V41N	-	SS6680N-41CV	Vdet-IC	4.1V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V41P	-	SS6680P-41CV	Vdet-IC	4.1V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V42	-	R1163N281B5	LVR-IC	LDO, 2.85V±1.5%, 150mA, +CE, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V42	eb	XC9110C421MR	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V42	eh	XC6383F421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V42A	-	FC6201P422M	LVR-IC	4.2V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V42A	-	ML6201P422M	LVR-IC	4.2V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V42C	-	SS6680C-42CV	Vdet-IC	4.2V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V42N	-	SS6680N-42CV	Vdet-IC	4.2V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V42P	-	SS6680P-42CV	Vdet-IC	4.2V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V43	eb	XC9110C431MR	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V43	eh	XC6383F431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V43A	-	FC6201P432M	LVR-IC	4.3V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V43A	-	ML6201P432M	LVR-IC	4.3V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V43C	-	SS6680C-43CV	Vdet-IC	4.3V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V43N	-	SS6680N-43CV	Vdet-IC	4.3V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V43P	-	SS6680P-43CV	Vdet-IC	4.3V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V44	eb	XC9110C441MR	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V44	eh	XC6383F441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V44A	-	FC6201P442M	LVR-IC	4.4V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V44A	-	ML6201P442M	LVR-IC	4.4V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V44C	-	SS6680C-44CV	Vdet-IC	4.4V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V44N	-	SS6680N-44CV	Vdet-IC	4.4V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V44P	-	SS6680P-44CV	Vdet-IC	4.4V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V45	eb	XC9110C451MR	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V45	eh	XC6383F451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V45A	-	FC6201P452M	LVR-IC	4.5V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V45A	-	ML6201P452M	LVR-IC	4.5V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V45C	-	SS6680C-45CV	Vdet-IC	4.5V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V45N	-	SS6680N-45CV	Vdet-IC	4.5V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V45P	-	SS6680P-45CV	Vdet-IC	4.5V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V46	eb	XC9110C461MR	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V46	eh	XC6383F461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V46A	-	FC6201P462M	LVR-IC	4.6V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V46A	-	ML6201P462M	LVR-IC	4.6V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V46C	-	SS6680C-46CV	Vdet-IC	4.6V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V46N	-	SS6680N-46CV	Vdet-IC	4.6V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V46P	-	SS6680P-46CV	Vdet-IC	4.6V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V47	eb	XC9110C471MR	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V47	eh	XC6383F471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V47A	-	FC6201P472M	LVR-IC	4.7V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V47A	-	ML6201P472M	LVR-IC	4.7V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V47C	-	SS6680C-47CV	Vdet-IC	4.7V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V47N	-	SS6680N-47CV	Vdet-IC	4.7V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V47P	-	SS6680P-47CV	Vdet-IC	4.7V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V48	eb	XC9110C481MR	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V48	eh	XC6383F481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V48A	-	FC6201P482M	LVR-IC	4.8V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V48A	-	ML6201P482M	LVR-IC	4.8V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V48C	-	SS6680C-48CV	Vdet-IC	4.8V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V48N	-	SS6680N-48CV	Vdet-IC	4.8V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V48P	-	SS6680P-48CV	Vdet-IC	4.8V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V49	eb	XC9110C491MR	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V49	eh	XC6383F491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V49A	-	FC6201P492M	LVR-IC	4.9V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V49A	-	ML6201P492M	LVR-IC	4.9V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V49C	-	SS6680C-49CV	Vdet-IC	4.9V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V49N	-	SS6680N-49CV	Vdet-IC	4.9V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V49P	-	SS6680P-49CV	Vdet-IC	4.9V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V4A	-	XC6118N24AMR-G	Vdet-IC	2.4V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
V4A	ef	XC9227A40CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 4.0V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V4A	ei	XC9227B40CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 4.0V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V4A	em	XC9227F40CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 4.0V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
V4A	en	XC9227C40CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 4.0V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V4A	eo	XC9227H40CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 4.0V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V4A	ep	XC9227G40CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 4.0V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
V4A	eq	XC9227E40CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 4.0V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
V4A	er	XC9227D40CM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 4.0V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
V4B	-	XC6118N24BMR-G	Vdet-IC	2.4V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
V4C	-	XC6118N24CMR-G	Vdet-IC	2.4V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
V4D	-	XC6118N24DMR-G	Vdet-IC	2.4V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
V5	-	BD45272G	Vdet-IC	2.7V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
V5	-	MC74VHC1G04DF	CMOS-Log	Inverter	SC-70-5	28	Log6	6b	Ons

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V5	-	MC74VHC1G04DT	CMOS-Log	Inverter	SOT-23-5	28	Log6	6b	Ons
V5	-	R1121N151B	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
V5	-	TC74A5-3.3VCT	Tdet-IC	Sensor (-40..+125±3°C), Vcc=3.3V, I2C-bus	SOT-23-5	28hd	-	6g	Mcc
V5-	-	RT9167-2HPB	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
V50	eb	XC9110C501MR	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V50	eh	XC6383F501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V50A	-	FC6201P502M	LVR-IC	5.0V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V50A	-	ML6201P502M	LVR-IC	5.0V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V50C	-	SS6680C-50CV	Vdet-IC	5.0V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V50N	-	SS6680N-50CV	Vdet-IC	5.0V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V50P	-	SS6680P-50CV	Vdet-IC	5.0V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V51	eb	XC9110C511MR	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V51	eh	XC6383F511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V51A	-	FC6201P512M	LVR-IC	5.1V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V51A	-	ML6201P512M	LVR-IC	5.1V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V51C	-	SS6680C-51CV	Vdet-IC	5.1V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V51N	-	SS6680N-51CV	Vdet-IC	5.1V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V51P	-	SS6680P-51CV	Vdet-IC	5.1V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V52	eb	XC9110C521MR	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V52	eh	XC6383F521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V52A	-	FC6201P522M	LVR-IC	5.2V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V52A	-	ML6201P522M	LVR-IC	5.2V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V52C	-	SS6680C-52CV	Vdet-IC	5.2V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V52N	-	SS6680N-52CV	Vdet-IC	5.2V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V52P	-	SS6680P-52CV	Vdet-IC	5.2V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V53	eb	XC9110C531MR	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V53	eh	XC6383F531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V53A	-	FC6201P532M	LVR-IC	5.3V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V53A	-	ML6201P532M	LVR-IC	5.3V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V53C	-	SS6680C-53CV	Vdet-IC	5.3V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V53N	-	SS6680N-53CV	Vdet-IC	5.3V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V53P	-	SS6680P-53CV	Vdet-IC	5.3V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V54	eb	XC9110C541MR	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V54	eh	XC6383F541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V54A	-	FC6201P542M	LVR-IC	5.4V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V54A	-	ML6201P542M	LVR-IC	5.4V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V54C	-	SS6680C-54CV	Vdet-IC	5.4V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V54N	-	SS6680N-54CV	Vdet-IC	5.4V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V54P	-	SS6680P-54CV	Vdet-IC	5.4V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V55	eb	XC9110C551MR	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V55	eh	XC6383F551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V55A	-	FC6201P552M	LVR-IC	5.5V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V55A	-	ML6201P552M	LVR-IC	5.5V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V55C	-	SS6680C-55CV	Vdet-IC	5.5V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V55N	-	SS6680N-55CV	Vdet-IC	5.5V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V55P	-	SS6680P-55CV	Vdet-IC	5.5V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V56	eb	XC9110C561MR	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V56	eh	XC6383F561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V56A	-	FC6201P562M	LVR-IC	5.6V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V56A	-	ML6201P562M	LVR-IC	5.6V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V56C	-	SS6680C-56CV	Vdet-IC	5.6V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V56N	-	SS6680N-56CV	Vdet-IC	5.6V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V56P	-	SS6680P-56CV	Vdet-IC	5.6V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V57	eb	XC9110C571MR	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V57	eh	XC6383F571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V57A	-	FC6201P572M	LVR-IC	5.7V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V57A	-	ML6201P572M	LVR-IC	5.7V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V57C	-	SS6680C-57CV	Vdet-IC	5.7V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V57N	-	SS6680N-57CV	Vdet-IC	5.7V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V57P	-	SS6680P-57CV	Vdet-IC	5.7V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V58	eb	XC9110C581MR	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V58	eh	XC6383F581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V58A	-	FC6201P582M	LVR-IC	5.8V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V58A	-	ML6201P582M	LVR-IC	5.8V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V58C	-	SS6680C-58CV	Vdet-IC	5.8V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V58N	-	SS6680N-58CV	Vdet-IC	5.8V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V58P	-	SS6680P-58CV	Vdet-IC	5.8V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V59	eb	XC9110C591MR	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V59	eh	XC6383F591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V59A	-	FC6201P592M	LVR-IC	5.9V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V59A	-	ML6201P592M	LVR-IC	5.9V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V59C	-	SS6680C-59CV	Vdet-IC	5.9V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V59N	-	SS6680N-59CV	Vdet-IC	5.9V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V59P	-	SS6680P-59CV	Vdet-IC	5.9V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V5A	-	XC6118N25AMR-G	Vdet-IC	2.5V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
V5B	-	XC6118N25BMR-G	Vdet-IC	2.5V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
V5C	-	XC6118N25CMR-G	Vdet-IC	2.5V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
V5D	-	XC6118N25DMR-G	Vdet-IC	2.5V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
V6	-	BD45262G	Vdet-IC	2.6V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
V6	-	R1121N161B	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
V6	-	TC74A6-3.3VCT	Tdet-IC	Sensor (-40..+125±3°C), Vcc=3.3V, I2C-bus	SOT-23-5	28hd	-	6g	Mcc
V60	eb	XC9110C601MR	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V60	eh	XC6383F601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V60A	-	FC6201P602M	LVR-IC	6.0V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Fis
V60A	-	ML6201P602M	LVR-IC	6.0V±2%, 250mA	SOT-23-5	28ym	VR1	6a	Mlc
V60C	-	SS6680C-60CV	Vdet-IC	6.0V±2.5%, +Reset PPO	SOT-23-5	28y4	VD7	6a	Ssc
V60N	-	SS6680N-60CV	Vdet-IC	6.0V±2.5%, +Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V60P	-	SS6680P-60CV	Vdet-IC	6.0V±2.5%, -Reset ODO	SOT-23-5	28y4	VD6	6a	Ssc
V61	eb	XC9110C611MR	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V61	eh	XC6383F611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V62	eb	XC9110C621MR	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V62	eh	XC6383F621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V63	eb	XC9110C631MR	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V63	eh	XC6383F631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V64	eb	XC9110C641MR	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V64	eh	XC6383F641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V65	eb	XC9110C651MR	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V65	eh	XC6383F651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V66	-	74LVC1G66GV	CMOS-Log	Single-pole single-throw analog switch	SOT753	28	Log16	6a	Nxp
V66	eb	XC9110C661MR	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V66	eh	XC6383F661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V67	eb	XC9110C671MR	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V67	eh	XC6383F671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V68	eb	XC9110C681MR	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V68	eh	XC6383F681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V69	eb	XC9110C691MR	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V69	eh	XC6383F691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V6A	-	XC6118N26AMR-G	Vdet-IC	2.6V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
V6B	-	XC6118N26BMR-G	Vdet-IC	2.6V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
V6C	-	XC6118N26CMR-G	Vdet-IC	2.6V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
V6D	-	XC6118N26DMR-G	Vdet-IC	2.6V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
V7	-	BD45252G	Vdet-IC	2.5V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
V7	-	MC74VHC1G07DF	CMOS-Log	Noninverting buffer/driver (ODO)	SC-70-5	28	Log8	6b	Ons
V7	-	MC74VHC1G07DT	CMOS-Log	Noninverting buffer/driver (ODO)	SOT-23-5	28	Log8	6b	Ons
V7	-	R1121N171B	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
V7	-	TC74A7-3.3VCT	Tdet-IC	Sensor (-40..+125±3°C), Vcc=3.3V, I2C-bus	SOT-23-5	28hd	-	6g	Mcc
V70	eb	XC9110C701MR	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA, +CE	SOT-25	28sc	DC3	6g	Tor
V70	eh	XC6383F701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-23-5	28sy	DC13	6g	Tor
V79	-	74LVC1G79GV	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT753	28	Log20	6a	Nxp
V7A	-	XC6118N27AMR-G	Vdet-IC	2.7V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
V7B	-	XC6118N27BMR-G	Vdet-IC	2.7V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
V7C	-	XC6118N27CMR-G	Vdet-IC	2.7V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
V7D	-	XC6118N27DMR-G	Vdet-IC	2.7V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
V8	-	BD45242G	Vdet-IC	2.4V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
V8	-	MC74VHC1G86DF	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353	28	Log5	6b	Ons
V8	-	MC74VHC1G86DT	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-23-5	28	Log5	6b	Ons
V8	-	R1121N181B	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
V80	-	74LVC1G80GV	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT753	28	Log21	6a	Nxp
V86	-	74LVC1G86GV	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT753	28	Log5	6a	Nxp
V8A	-	XC6118N28AMR-G	Vdet-IC	2.8V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
V8B	-	XC6118N28BMR-G	Vdet-IC	2.8V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
V8C	-	XC6118N28CMR-G	Vdet-IC	2.8V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
V8D	-	XC6118N28DMR-G	Vdet-IC	2.8V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
V9	-	BD45232G	Vdet-IC	2.3V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
V9	-	MC74HVC1G66DF	CMOS-Log	Single-pole single-throw analog switch	SC-70-5	28	Log16	6b	Ons
V9	-	MC74HVC1G66DT	CMOS-Log	Single-pole single-throw analog switch	SOT-23-5	28	Log16	6b	Ons
V9	-	MC74VHC1G66DF	CMOS-Log	Single-pole single-throw analog switch	SOT-353	28	Log16	6b	Ons
V9	-	MC74VHC1G66DT	CMOS-Log	Single-pole single-throw analog switch	SOT-23-5	28	Log16	6b	Ons
V9	-	R1121N191B	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
V9A	-	XC6118N29AMR-G	Vdet-IC	2.9V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V9B	-	XC6118N29BMR-G	Vdet-IC	2.9V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
V9C	-	XC6118N29CMR-G	Vdet-IC	2.9V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
V9D	-	XC6118N29DMR-G	Vdet-IC	2.9V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
VA	-	74LVC1G00GW	CMOS-Log	2-input NAND gate	SOT-353-1	28	Log1	6a	Nxp
VA	-	AP7365-ADJW	LVR-IC	LDO, Adjustable, 0.8..3.9V, 600mA, +CE	SOT-25	28sg	VR16	6t	Di
VA	-	BD46485G	Vdet-IC	4.8V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VA	-	MC74VHC1G14DF	CMOS-Log	Inverting Schmitt-trigger	SC-70-5	28	Log7	6b	Ons
VA	-	MC74VHC1G14DT	CMOS-Log	Inverting Schmitt-trigger	SOT-23-5	28	Log7	6b	Ons
VA2	-	S-1135C34-M5T1S	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VA3	-	S-1135C35-M5T1S	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VA9	ef	XC9227A0M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 0.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VA9	ei	XC9227B0M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 0.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VA9	en	XC9227C0M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 0.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VA9	er	XC9227D0M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 0.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VAA	-	S-1135C10-M5T1S	LVR-IC	LDO, 1.0V±15mV, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAB	-	S-1135C11-M5T1S	LVR-IC	LDO, 1.1V±15mV, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAC	-	S-1135C12-M5T1S	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAD	-	S-1135C13-M5T1S	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAE	-	S-1135C14-M5T1S	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAF	-	S-1135C15-M5T1S	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAG	-	S-1135C16-M5T1S	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAH	-	S-1135C17-M5T1S	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAI	-	S-1135C18-M5T1S	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAJ	-	S-1135C1J-M5T1S	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAK	-	S-1135C19-M5T1S	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAL	-	S-1135C20-M5T1S	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAM	-	S-1135C21-M5T1S	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAM	ef	XC9227A0MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 0.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VAM	ei	XC9227B0MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 0.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VAM	en	XC9227C0MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 0.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VAM	er	XC9227D0MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 0.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VAN	-	S-1135C22-M5T1S	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAO	-	S-1135C23-M5T1S	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAP	-	S-1135C24-M5T1S	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAQ	-	S-1135C25-M5T1S	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAR	-	S-1135C26-M5T1S	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAS	-	S-1135C27-M5T1S	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAT	-	S-1135C28-M5T1S	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAU	-	S-1135C2J-M5T1S	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAV	-	S-1135C29-M5T1S	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAW	-	S-1135C30-M5T1S	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAX	-	S-1135C31-M5T1S	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAY	-	S-1135C32-M5T1S	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VAZ	-	S-1135C33-M5T1S	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
VB	-	74LVC1G02GW	CMOS-Log	2-input NOR gate	SOT-353-1	28	Log2	6a	Nxp
VB	-	AP7365-08W	LVR-IC	LDO, 0.8V±2%, 600mA, +CE	SOT-25	28cx	VR4	6t	Di
VB	-	BD46475G	Vdet-IC	4.7V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VB0	ef	XC9227A1A6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VB0	ei	XC9227B1A6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VB0	en	XC9227C1A6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VB0	er	XC9227D1A6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VB1	ef	XC9227A1B6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VB1	ei	XC9227B1B6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VB1	en	XC9227C1B6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VB1	er	XC9227D1B6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VB2	-	S-1135D34-M5T1S	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VB2	ef	XC9227A1C6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VB2	ei	XC9227B1C6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VB2	en	XC9227C1C6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VB2	er	XC9227D1C6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VB3	-	S-1135D35-M5T1S	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VB3	ef	XC9227A1D6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VB3	ei	XC9227B1D6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VB3	en	XC9227C1D6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VB3	er	XC9227D1D6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VB4	ef	XC9227A1E6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VB4	ei	XC9227B1E6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VB4	en	XC9227C1E6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VB4	er	XC9227D1E6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VB5	ef	XC9227A1F6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VB5	ei	XC9227B1F6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VB5	en	XC9227C1F6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VB5	er	XC9227D1F6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VB6	ef	XC9227A1H6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VB6	ei	XC9227B1H6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VB6	en	XC9227C1H6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VB6	er	XC9227D1H6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VB7	ef	XC9227A1K6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VB7	ei	XC9227B1K6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VB7	en	XC9227C1K6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VB7	er	XC9227D1K6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VB8	ef	XC9227A1L6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VB8	ei	XC9227B1L6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VB8	en	XC9227C1L6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VB8	er	XC9227D1L6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VB9	ef	XC9227A1M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VB9	ei	XC9227B1M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VB9	en	XC9227C1M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VB9	er	XC9227D1M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VBA	-	S-1135D10-M5T1S	LVR-IC	LDO, 1.0V±15mV, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBA	ef	XC9227A1ACM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VBA	ei	XC9227B1ACM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VBA	en	XC9227C1ACM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VBA	er	XC9227D1ACM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VBB	-	S-1135D11-M5T1S	LVR-IC	LDO, 1.1V±15mV, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBB	ef	XC9227A1BCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VBB	ei	XC9227B1BCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VBB	en	XC9227C1BCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VBB	er	XC9227D1BCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VBC	-	S-1135D12-M5T1S	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBC	ef	XC9227A1CCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VBC	ei	XC9227B1CCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VBC	en	XC9227C1CCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VBC	er	XC9227D1CCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VBD	-	S-1135D13-M5T1S	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBD	ef	XC9227A1DCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VBD	ei	XC9227B1DCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VBD	en	XC9227C1DCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VBD	er	XC9227D1DCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VBE	-	S-1135D14-M5T1S	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBE	ef	XC9227A1ECM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VBE	ei	XC9227B1ECM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VBE	en	XC9227C1ECM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VBE	er	XC9227D1ECM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VBF	-	S-1135D15-M5T1S	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBF	ef	XC9227A1FCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VBF	ei	XC9227B1FCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VBF	en	XC9227C1FCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VBF	er	XC9227D1FCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VBG	-	S-1135D16-M5T1S	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBH	-	S-1135D17-M5T1S	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBH	ef	XC9227A1HCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VBH	ei	XC9227B1HCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VBH	en	XC9227C1HCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VBH	er	XC9227D1HCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VBI	-	S-1135D18-M5T1S	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBJ	-	S-1135D1J-M5T1S	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBK	-	S-1135D19-M5T1S	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBK	ef	XC9227A1KCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VBK	ei	XC9227B1KCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VBK	en	XC9227C1KCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VBK	er	XC9227D1KCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VBL	-	S-1135D20-M5T1S	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBL	ef	XC9227A1LCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VBL	ei	XC9227B1LCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VBL	en	XC9227C1LCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VBL	er	XC9227D1LCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VBM	-	S-1135D21-M5T1S	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBM	ef	XC9227A1MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VBM	ei	XC9227B1MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VBM	en	XC9227C1MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VBM	er	XC9227D1MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VBN	-	S-1135D22-M5T1S	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBO	-	S-1135D23-M5T1S	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBP	-	S-1135D24-M5T1S	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBQ	-	S-1135D25-M5T1S	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBR	-	S-1135D26-M5T1S	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBS	-	S-1135D27-M5T1S	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBT	-	S-1135D28-M5T1S	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBU	-	S-1135D2J-M5T1S	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBV	-	S-1135D29-M5T1S	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBW	-	S-1135D30-M5T1S	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBX	-	S-1135D31-M5T1S	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBY	-	S-1135D32-M5T1S	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VBZ	-	S-1135D33-M5T1S	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
VC	-	74LVC1G04GW	CMOS-Log	Inverter	SOT-353-1	28	Log6	6a	Nxp
VC	-	AP7365-10W	LVR-IC	LDO, 1.0V±2%, 600mA, +CE	SOT-25	28cx	VR4	6t	Di
VC	-	BD46465G	Vdet-IC	4.6V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VC	-	MC74VHC1GT14DF	CMOS-Log	Inverting Schmitt-trigger	SC-70-5	28	Log7	6b	Ons
VC	-	MC74VHC1GT14DT	CMOS-Log	Inverting Schmitt-trigger	SOT-23-5	28	Log7	6b	Ons
VC-	-	RT9193-1HPB	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
VC0	ef	XC9227A2A6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VC0	ei	XC9227B2A6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VC0	en	XC9227C2A6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VC0	er	XC9227D2A6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VC1	ef	XC9227A2B6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VC1	ei	XC9227B2B6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VC1	en	XC9227C2B6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VC1	er	XC9227D2B6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VC2	ef	XC9227A2C6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VC2	ei	XC9227B2C6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VC2	en	XC9227C2C6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VC2	er	XC9227D2C6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VC3	ef	XC9227A2D6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VC3	ei	XC9227B2D6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VC3	en	XC9227C2D6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VC3	er	XC9227D2D6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VC4	ef	XC9227A2E6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VC4	ei	XC9227B2E6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VC4	en	XC9227C2E6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VC4	er	XC9227D2E6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VC5	ef	XC9227A2F6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VC5	ei	XC9227B2F6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VC5	en	XC9227C2F6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VC5	er	XC9227D2F6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VC6	ef	XC9227A2H6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VC6	ei	XC9227B2H6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VC6	en	XC9227C2H6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VC6	er	XC9227D2H6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VC7	ef	XC9227A2K6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VC7	ei	XC9227B2K6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VC7	en	XC9227C2K6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VC7	er	XC9227D2K6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VC8	ef	XC9227A2L6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VC8	ei	XC9227B2L6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VC8	en	XC9227C2L6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VC8	er	XC9227D2L6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VC9	ef	XC9227A2M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VC9	ei	XC9227B2M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VC9	en	XC9227C2M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VC9	er	XC9227D2M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VCA	ef	XC9227A2ACM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VCA	ei	XC9227B2ACM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VCA	en	XC9227C2ACM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VCA	er	XC9227D2ACM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VCB	ef	XC9227A2BCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VCB	ei	XC9227B2BCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VCB	en	XC9227C2BCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VCB	er	XC9227D2BCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VCC	ef	XC9227A2CCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VCC	ei	XC9227B2CCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VCC	en	XC9227C2CCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VCC	er	XC9227D2CCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VCD	ef	XC9227A2DCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VCD	ei	XC9227B2DCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VCD	en	XC9227C2DCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VCD	er	XC9227D2DCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VCE	ef	XC9227A2ECM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VCE	ei	XC9227B2ECM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VCE	en	XC9227C2ECM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VCE	er	XC9227D2ECM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VCF	ef	XC9227A2FCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VCF	ei	XC9227B2FCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VCF	en	XC9227C2FCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VCF	er	XC9227D2FCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VCH	ef	XC9227A2HCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VCH	ei	XC9227B2HCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VCH	en	XC9227C2HCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VCH	er	XC9227D2HCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VCK	ef	XC9227A2KCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VCK	ei	XC9227B2KCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VCK	en	XC9227C2KCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VCK	er	XC9227D2KCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VCL	ef	XC9227A2LCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VCL	ei	XC9227B2LCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VCL	en	XC9227C2LCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VCL	er	XC9227D2LCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VCM	ef	XC9227A2MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VCM	ei	XC9227B2MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VCM	en	XC9227C2MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VCM	er	XC9227D2MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD	-	74LVC1GU04GW	CMOS-Log	Inverter	SOT-353-1	28	Log6	6a	Nxp
VD	-	AP7365-12W	LVR-IC	LDO, 1.2V±2%, 600mA, +CE	SOT-25	28cx	VR4	6t	Di
VD	-	BD46455G	Vdet-IC	4.5V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VD	-	MC74VHC1G132DF	CMOS-Log	2-input NAND Schmitt-trigger	SOT-353	28	Log12	6b	Ons
VD-	-	RT9193-35PB	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
VD0	ef	XC9227A3A6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD0	ei	XC9227B3A6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD0	em	XC9227F3A6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.05V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD0	en	XC9227C3A6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD0	eo	XC9227H3A6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.05V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD0	ep	XC9227G3A6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.05V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD0	eq	XC9227E3A6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.05V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD0	er	XC9227D3A6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD1	ef	XC9227A3B6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD1	ei	XC9227B3B6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD1	em	XC9227F3B6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.15V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD1	en	XC9227C3B6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD1	eo	XC9227H3B6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.15V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD1	ep	XC9227G3B6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.15V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD1	eq	XC9227E3B6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.15V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD1	er	XC9227D3B6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD2	ef	XC9227A3C6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD2	ei	XC9227B3C6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD2	em	XC9227F3C6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.25V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD2	en	XC9227C3C6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD2	eo	XC9227H3C6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.25V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD2	ep	XC9227G3C6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.25V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD2	eq	XC9227E3C6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.25V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD2	er	XC9227D3C6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD3	ef	XC9227A3D6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD3	ei	XC9227B3D6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD3	em	XC9227F3D6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.35V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD3	en	XC9227C3D6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD3	eo	XC9227H3D6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.35V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD3	ep	XC9227G3D6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.35V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD3	eq	XC9227E3D6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.35V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD3	er	XC9227D3D6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD4	ef	XC9227A3E6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD4	ei	XC9227B3E6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VD4	em	XC9227F3E6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.45V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD4	en	XC9227C3E6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD4	eo	XC9227H3E6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.45V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD4	ep	XC9227G3E6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.45V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD4	eq	XC9227E3E6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.45V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD4	er	XC9227D3E6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD5	ef	XC9227A3F6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD5	ei	XC9227B3F6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD5	em	XC9227F3F6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.55V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD5	en	XC9227C3F6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD5	eo	XC9227H3F6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.55V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD5	ep	XC9227G3F6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.55V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD5	eq	XC9227E3F6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.55V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD5	er	XC9227D3F6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD6	ef	XC9227A3H6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD6	ei	XC9227B3H6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD6	em	XC9227F3H6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.65V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD6	en	XC9227C3H6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD6	eo	XC9227H3H6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.65V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD6	ep	XC9227G3H6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.65V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD6	eq	XC9227E3H6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.65V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD6	er	XC9227D3H6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD7	ef	XC9227A3K6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD7	ei	XC9227B3K6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD7	em	XC9227F3K6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.75V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD7	en	XC9227C3K6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD7	eo	XC9227H3K6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.75V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD7	ep	XC9227G3K6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.75V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD7	eq	XC9227E3K6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.75V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD7	er	XC9227D3K6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD8	ef	XC9227A3L6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD8	ei	XC9227B3L6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD8	em	XC9227F3L6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.85V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD8	en	XC9227C3L6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD8	eo	XC9227H3L6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.85V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD8	ep	XC9227G3L6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.85V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD8	eq	XC9227E3L6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.85V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD8	er	XC9227D3L6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD9	ef	XC9227A3M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD9	ei	XC9227B3M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD9	em	XC9227F3M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.95V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VD9	en	XC9227C3M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD9	eo	XC9227H3M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.95V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VD9	ep	XC9227G3M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.95V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VD9	eq	XC9227E3M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.95V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VD9	er	XC9227D3M6M	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDA	ef	XC9227A3ACM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.05V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDA	ei	XC9227B3ACM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.05V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDA	em	XC9227F3ACM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.05V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDA	en	XC9227C3ACM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.05V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDA	eo	XC9227H3ACM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.05V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDA	ep	XC9227G3ACM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.05V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDA	eq	XC9227E3ACM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.05V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDA	er	XC9227D3ACM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.05V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDB	ef	XC9227A3BCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.15V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDB	ei	XC9227B3BCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.15V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDB	em	XC9227F3BCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.15V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDB	en	XC9227C3BCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.15V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDB	eo	XC9227H3BCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.15V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDB	ep	XC9227G3BCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.15V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDB	eq	XC9227E3BCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.15V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDB	er	XC9227D3BCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.15V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDC	ef	XC9227A3CCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.25V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDC	ei	XC9227B3CCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.25V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDC	em	XC9227F3CCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.25V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDC	en	XC9227C3CCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.25V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDC	eo	XC9227H3CCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.25V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDC	ep	XC9227G3CCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.25V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDC	eq	XC9227E3CCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.25V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDC	er	XC9227D3CCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.25V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VDD	ef	XC9227A3DCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.35V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDD	ei	XC9227B3DCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.35V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDD	em	XC9227F3DCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.35V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDD	en	XC9227C3DCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.35V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDD	eo	XC9227H3DCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.35V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDD	ep	XC9227G3DCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.35V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDD	eq	XC9227E3DCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.35V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDD	er	XC9227D3DCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.35V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDE	ef	XC9227A3ECM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.45V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDE	ei	XC9227B3ECM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.45V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDE	em	XC9227F3ECM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.45V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDE	en	XC9227C3ECM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.45V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDE	eo	XC9227H3ECM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.45V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDE	ep	XC9227G3ECM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.45V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDE	eq	XC9227E3ECM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.45V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDE	er	XC9227D3ECM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.45V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDF	ef	XC9227A3FCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.55V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDF	ei	XC9227B3FCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.55V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDF	em	XC9227F3FCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.55V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDF	en	XC9227C3FCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.55V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDF	eo	XC9227H3FCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.55V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDF	ep	XC9227G3FCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.55V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDF	eq	XC9227E3FCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.55V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDF	er	XC9227D3FCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.55V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDH	ef	XC9227A3HCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.65V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDH	ei	XC9227B3HCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.65V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDH	em	XC9227F3HCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.65V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDH	en	XC9227C3HCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.65V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDH	eo	XC9227H3HCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.65V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDH	ep	XC9227G3HCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.65V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDH	eq	XC9227E3HCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.65V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDH	er	XC9227D3HCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.65V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDK	ef	XC9227A3KCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.75V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDK	ei	XC9227B3KCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.75V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDK	em	XC9227F3KCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.75V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDK	en	XC9227C3KCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.75V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDK	eo	XC9227H3KCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.75V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDK	ep	XC9227G3KCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.75V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDK	eq	XC9227E3KCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.75V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDK	er	XC9227D3KCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.75V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDL	ef	XC9227A3LCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.85V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDL	ei	XC9227B3LCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.85V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDL	em	XC9227F3LCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.85V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDL	en	XC9227C3LCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.85V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDL	eo	XC9227H3LCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.85V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDL	ep	XC9227G3LCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.85V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDL	eq	XC9227E3LCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.85V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDL	er	XC9227D3LCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.85V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDM	ef	XC9227A3MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.95V±1%, 600mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDM	ei	XC9227B3MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.95V±1%, 600mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDM	em	XC9227F3MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.95V±1%, 900mA, -CE	SOT-25	28dc4	DC1	6g	Tor
VDM	en	XC9227C3MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.95V±1%, 600mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDM	eo	XC9227H3MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.95V±1%, 900mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VDM	ep	XC9227G3MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.95V±1%, 900mA, +CE, PDR	SOT-25	28dc4	DC1	6g	Tor
VDM	eq	XC9227E3MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.95V±1%, 900mA, +CE	SOT-25	28dc4	DC1	6g	Tor
VDM	er	XC9227D3MCM	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.95V±1%, 600mA, -CE, PUR	SOT-25	28dc4	DC1	6g	Tor
VE	-	74LVC1G08GW	CMOS-Log	2-input AND gate	SOT-353-1	28	Log3	6a	Nxp
VE	-	AP7365-15W	LVR-IC	LDO, 1.5V±2%, 600mA, +CE	SOT-25	28cx	VR4	6t	Di
VE	-	BD46445G	Vdet-IC	4.4V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VE	-	MC74HVC1GT66DF	CMOS-Log	Single-pole single-throw analog switch	SC-70-5	28	Log16	6b	Ons
VE	-	MC74HVC1GT66DT	CMOS-Log	Single-pole single-throw analog switch	SOT-23-5	28	Log16	6b	Ons
VE	-	MC74VHC1GT66DF	CMOS-Log	Single-pole single-throw analog switch	SOT-353	28	Log16	6b	Ons
VE	-	MC74VHC1GT66DT	CMOS-Log	Single-pole single-throw analog switch	SOT-23-5	28	Log16	6b	Ons
VF	-	74LVC1G14GW	CMOS-Log	Inverting Schmitt-trigger	SOT-353-1	28	Log7	6a	Nxp
VF	-	AP7365-18W	LVR-IC	LDO, 1.8V±2%, 600mA, +CE	SOT-25	28cx	VR4	6t	Di
VF	-	BD46435G	Vdet-IC	4.3V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VF	-	MC74VHC1G05DF	CMOS-Log	Inverter (ODO)	SOT-353	28	Log19	6b	Ons
VF	-	MC74VHC1G05DT	CMOS-Log	Inverter (ODO)	SOT-23-5	28	Log19	6b	Ons
VG	-	74LVC1G32GW	CMOS-Log	2-input OR gate	SOT-353-1	28	Log4	6a	Nxp
VG	-	AP7365-20W	LVR-IC	LDO, 2.0V±2%, 600mA, +CE	SOT-25	28cx	VR4	6t	Di

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VG	-	BD46425G	Vdet-IC	4.2V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VH	-	74LVC1G86GW	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353-1	28	Log5	6a	Nxp
VH	-	AP7365-25W	LVR-IC	LDO, 2.5V±2%, 600mA, +CE	SOT-25	28cx	VR4	6t	Di
VH	-	BD46415G	Vdet-IC	4.1V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VH	-	MC74VHC1GT00DF	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6b	Ons
VH	-	MC74VHC1GT00DT	CMOS-Log	2-input NAND gate	SOT-23-5	28	Log1	6b	Ons
VH2	-	S-1137A34-M5T1S	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VH3	-	S-1137A35-M5T1S	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHC	-	S-1137A12-M5T1S	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHD	-	S-1137A13-M5T1S	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHE	-	S-1137A14-M5T1S	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHF	-	S-1137A15-M5T1S	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHG	-	S-1137A16-M5T1S	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHH	-	S-1137A17-M5T1S	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHI	-	S-1137A18-M5T1S	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHJ	-	S-1137A1J-M5T1S	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHK	-	S-1137A19-M5T1S	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHL	-	S-1137A20-M5T1S	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHM	-	S-1137A21-M5T1S	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHN	-	S-1137A22-M5T1S	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHO	-	S-1137A23-M5T1S	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHP	-	S-1137A24-M5T1S	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHQ	-	S-1137A25-M5T1S	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHR	-	S-1137A26-M5T1S	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHS	-	S-1137A27-M5T1S	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHT	-	S-1137A28-M5T1S	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHU	-	S-1137A2J-M5T1S	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHV	-	S-1137A29-M5T1S	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHW	-	S-1137A30-M5T1S	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHX	-	S-1137A31-M5T1S	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHY	-	S-1137A32-M5T1S	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VHZ	-	S-1137A33-M5T1S	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, CL, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VI2	-	S-1137B34-M5T1S	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VI3	-	S-1137B35-M5T1S	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIC	-	S-1137B12-M5T1S	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VID	-	S-1137B13-M5T1S	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIE	-	S-1137B14-M5T1S	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIF	-	S-1137B15-M5T1S	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIG	-	S-1137B16-M5T1S	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIH	-	S-1137B17-M5T1S	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VII	-	S-1137B18-M5T1S	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIJ	-	S-1137B1J-M5T1S	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIK	-	S-1137B19-M5T1S	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIL	-	S-1137B20-M5T1S	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIM	-	S-1137B21-M5T1S	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIN	-	S-1137B22-M5T1S	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIO	-	S-1137B23-M5T1S	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIP	-	S-1137B24-M5T1S	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIQ	-	S-1137B25-M5T1S	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIR	-	S-1137B26-M5T1S	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIS	-	S-1137B27-M5T1S	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIT	-	S-1137B28-M5T1S	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIU	-	S-1137B2J-M5T1S	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIV	-	S-1137B29-M5T1S	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIW	-	S-1137B30-M5T1S	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIX	-	S-1137B31-M5T1S	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIY	-	S-1137B32-M5T1S	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VIZ	-	S-1137B33-M5T1S	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, CL	SOT-23-5	28vrx	VR7	6g	Sii
VJ	-	74LVC1G17GW	CMOS-Log	Schmitt-trigger	SOT-353-1	28	Log11	6a	Nxp
VJ	-	AP7365-28W	LVR-IC	LDO, 2.8V±2%, 600mA, +CE	SOT-25	28cx	VR4	6t	Di
VJ	-	BD46405G	Vdet-IC	4.0V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VJ	-	MC74VHC1GT02DF	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6b	Ons
VJ	-	MC74VHC1GT02DT	CMOS-Log	2-input NOR gate	SOT-23-5	28	Log2	6b	Ons
VJ-	-	RT9198-29PBR	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
VJ1	-	UM37531P	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VJ2	-	S-1137C34-M5T1S	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJ2	-	UM37532P	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VJ3	-	S-1137C35-M5T1S	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJ3	-	UM37533P	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VJ4	-	UM37534P	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VJ5	-	UM37535P	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VJ6	-	UM37536P	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VJ7	-	UM37537P	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VJ8	-	UM37538P	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VJ9	-	UM37539P	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VJA	-	UM37540P	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VJC	-	S-1137C12-M5T1S	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJD	-	S-1137C13-M5T1S	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJE	-	S-1137C14-M5T1S	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJF	-	S-1137C15-M5T1S	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJG	-	S-1137C16-M5T1S	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJH	-	S-1137C17-M5T1S	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJI	-	S-1137C18-M5T1S	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJJ	-	S-1137C1J-M5T1S	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJK	-	S-1137C19-M5T1S	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJL	-	S-1137C20-M5T1S	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJM	-	S-1137C21-M5T1S	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJN	-	S-1137C22-M5T1S	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJO	-	S-1137C23-M5T1S	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJP	-	S-1137C24-M5T1S	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJQ	-	S-1137C25-M5T1S	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJR	-	S-1137C26-M5T1S	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJS	-	S-1137C27-M5T1S	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJT	-	S-1137C28-M5T1S	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJU	-	S-1137C2J-M5T1S	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJV	-	S-1137C29-M5T1S	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJW	-	S-1137C30-M5T1S	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJX	-	S-1137C31-M5T1S	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJY	-	S-1137C32-M5T1S	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VJZ	-	S-1137C33-M5T1S	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, PDR	SOT-23-5	28vrx	VR7	6g	Sii
VK	-	AP7365-30W	LVR-IC	LDO, 3.0V±2%, 600mA, +CE	SOT-25	28cx	VR4	6t	Di
VK	-	BD46395G	Vdet-IC	3.9V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VK	-	MC74VHC1GT04DF	CMOS-Log	Inverter	SC-70-5	28	Log6	6b	Ons
VK	-	MC74VHC1GT04DT	CMOS-Log	Inverter	SOT-23-5	28	Log6	6b	Ons
VK	-	MC74VHC1GU04DF	CMOS-Log	Inverter	SOT-353	28	Log6	6b	Ons
VK	-	MC74VHC1GU04DT	CMOS-Log	Inverter	SOT-23-5	28	Log6	6b	Ons
VK2	-	S-1137D34-M5T1S	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VK3	-	S-1137D35-M5T1S	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKC	-	S-1137D12-M5T1S	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKD	-	S-1137D13-M5T1S	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKE	-	S-1137D14-M5T1S	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKF	-	S-1137D15-M5T1S	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKG	-	S-1137D16-M5T1S	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKH	-	S-1137D17-M5T1S	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKI	-	S-1137D18-M5T1S	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKJ	-	S-1137D1J-M5T1S	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKK	-	S-1137D19-M5T1S	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKL	-	S-1137D20-M5T1S	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKM	-	S-1137D21-M5T1S	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKN	-	S-1137D22-M5T1S	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKO	-	S-1137D23-M5T1S	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKP	-	S-1137D24-M5T1S	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKQ	-	S-1137D25-M5T1S	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKR	-	S-1137D26-M5T1S	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKS	-	S-1137D27-M5T1S	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKT	-	S-1137D28-M5T1S	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKU	-	S-1137D2J-M5T1S	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKV	-	S-1137D29-M5T1S	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKW	-	S-1137D30-M5T1S	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKX	-	S-1137D31-M5T1S	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKY	-	S-1137D32-M5T1S	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VKZ	-	S-1137D33-M5T1S	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Sii
VL	-	74LVC1G66GW	CMOS-Log	Single-pole single-throw analog switch	SOT-353-1	28	Log16	6a	Nxp
VL	-	BD46385G	Vdet-IC	3.8V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VL	-	MC74VHC1GT50DF	CMOS-Log	Noninverting buffer	SOT-353	28	Log10	6b	Ons
VL	-	MC74VHC1GT50DT	CMOS-Log	Noninverting buffer	SOT-23-5	28	Log10	6b	Ons
VL2	-	UM37512P	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VL3	-	UM37513P	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VL4	-	UM37514P	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VL5	-	UM37515P	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VL6	-	UM37516P	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VL7	-	UM37517P	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VL8	-	UM37518P	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VL9	-	UM37519P	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VLA	-	UM37520P	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VM	-	74LVC1G125GW	CMOS-Log	Bus buffer gate with 3-state output	SOT-353-1	28	Log14	6a	Nxp
VM	-	AP7365-33W	LVR-IC	LDO, 3.3V±2%, 600mA, +CE	SOT-25	28cx	VR4	6t	Di
VM	-	BD46375G	Vdet-IC	3.7V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VM	-	MC74VHC1GT86DF	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353	28	Log5	6b	Ons
VM	-	MC74VHC1GT86DT	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-23-5	28	Log5	6b	Ons
VM	-	SN74CBTLV1G125DCK	CMOS-Log	Bus buffer gate with 3-state output	SC-70-5	28	Log14	6g	Ti
VM-	-	RT9818C-50PB	Vdet-IC	5.0V±1.5%, -Reset ODO, Td=220ms	SOT-23-5	28vdm	VD6	6a	Rct
VM1	-	UM37521P	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VM2	-	UM37522P	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VM3	-	UM37523P	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VM4	-	UM37524P	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VM5	-	UM37525P	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VM6	-	UM37526P	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VM7	-	UM37527P	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VM8	-	UM37528P	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VM9	-	UM37529P	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VMA	-	UM37530P	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VN	-	74LVC1G126GW	CMOS-Log	Bus buffer gate with 3-state output	SOT-353-1	28	Log13	6a	Nxp
VN	-	AP7365-39W	LVR-IC	LDO, 3.9V±2%, 600mA, +CE	SOT-25	28cx	VR4	6t	Di
VN	-	BD46365G	Vdet-IC	3.6V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VN	-	MC74VHC1GT32DF	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6b	Ons
VN	-	MC74VHC1GT32DT	CMOS-Log	2-input OR gate	SOT-23-5	28	Log4	6b	Ons
VN-	-	RT9193-29PB	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
VN=	-	RT9193-29GB	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
VO	-	BD45322G	Vdet-IC	3.2V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
VO	-	MC74VHC1G125DF	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log14	6b	Ons
VO	-	MC74VHC1G125DT	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log14	6b	Ons
VP	-	74LVC1G79GW	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT-353-1	28	Log20	6a	Nxp
VP	-	BD46355G	Vdet-IC	3.5V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VP	-	MC74VHC1G03DF	CMOS-Log	2-input NOR gate (ODO)	SOT-353	28	Log18	6b	Ons
VP	-	MC74VHC1G03DT	CMOS-Log	2-input NOR gate (ODO)	SOT-23-5	28	Log18	6b	Ons
VQ	-	BD46345G	Vdet-IC	3.5V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VQ-	-	RT9193-20PB	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
VR	-	74LVC1G06GW	CMOS-Log	Inverter (ODO)	SOT-353-1	28	Log19	6a	Nxp
VR	-	BD46335G	Vdet-IC	3.3V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VR	-	KIC7SH04FU	CMOS-Log	Inverter	SOT-353	28	Log6	6a	Kec
VR	-	MC74VHC1G50DF	CMOS-Log	Noninverting buffer	SOT-353	28	Log10	6b	Ons
VR	-	MC74VHC1G50DT	CMOS-Log	Noninverting buffer	SOT-23-5	28	Log10	6b	Ons
VR	-	R1122N151B	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
VR-	-	RT9198-15PBR	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
VR=	-	RT9198-15GBR	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
VS	-	74LVC1G07GW	CMOS-Log	Noninverting buffer/driver (ODO)	SOT-353-1	28	Log8	6a	Nxp
VS	-	BD46325G	Vdet-IC	3.2V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VS	-	R1122N161B	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
VS-	-	RT9198-20PB	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
VT	-	74LVC1G80GW	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT-353-1	28	Log21	6a	Nxp
VT	-	BD46315G	Vdet-IC	3.1V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VT	-	KIC7SH08FU	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6a	Kec
VT	-	MC74VHC1GT08DF	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6b	Ons
VT	-	MC74VHC1GT08DT	CMOS-Log	2-input AND gate	SOT-23-5	28	Log3	6b	Ons
VT	-	R1122N171B	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
VT-	-	RT9198-20PBR	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
VT1	-	UM37541P	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VT2	-	UM37542P	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VT3	-	UM37543P	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VT4	-	UM37544P	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VT5	-	UM37545P	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VT6	-	UM37546P	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VT7	-	UM37547P	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VT8	-	UM37548P	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VT9	-	UM37549P	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VTA	-	UM37550P	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-353	28cx	VR4	6v	Uns
VU	-	BD46305G	Vdet-IC	3.0V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VU	-	R1122N181B	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
VU-	-	RT9198-29PB	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VU4	-	74LVC1GU04GV	CMOS-Log	Inverter	SOT753	28	Log6	6a	Nxp
VV	-	BD46295G	Vdet-IC	2.9V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VV	-	R1122N191B	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, +CE	SOT-23-5	28vt	VR4	6g	Ric
VV-	-	RT9169-50PB	LVR-IC	LDO, 5.0V±2%, 100mA, -CE	SOT-23-5	28cx	VR4	6g	Rct
VW	-	BD46285G	Vdet-IC	2.8V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VW-	-	RT9198-2HPB	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
VX	-	BD46275G	Vdet-IC	2.7V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VX	-	MC74HVC1G09DF	CMOS-Log	2-input AND gate (ODO)	SC-70-5	28	Log9	6b	Ons
VX	-	MC74HVC1G09DT	CMOS-Log	2-input AND gate (ODO)	SOT-23-5	28	Log9	6b	Ons
VX-	-	RT9193-26PB	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
VY	-	BD46265G	Vdet-IC	2.6V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VY-	-	RT9198-34PB	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
VZ	-	BD46255G	Vdet-IC	2.5V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
VZ	-	MC74VHC1G135DF	CMOS-Log	2-input NAND Schmitt-trigger (ODO)	SOT-353	28	Log15	6b	Ons
VZ	-	MC74VHC1G135DT	CMOS-Log	2-input NAND Schmitt-trigger (ODO)	SOT-23-5	28	Log15	6b	Ons
VZ-	-	RT9198-34PBR	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
W0	-	BD46245G	Vdet-IC	2.4V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
W0	-	R1210N301D	DC-DC-IC	PWM step-up, 3V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
W0-	-	RT9169-12PB	LVR-IC	LDO, 1.2V±2%, 100mA, -CE	SOT-23-5	28cx	VR4	6g	Rct
W009	-	R3111Q092B	Vdet-IC	0.9V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W010	-	R3111Q102B	Vdet-IC	1.0V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W011	-	R3111Q112B	Vdet-IC	1.1V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W012	-	R3111Q122B	Vdet-IC	1.2V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W013	-	R3111Q132B	Vdet-IC	1.3V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W014	-	R3111Q142B	Vdet-IC	1.4V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W015	-	R3111Q152B	Vdet-IC	1.5V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W016	-	R3111Q162B	Vdet-IC	1.6V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W017	-	R3111Q172B	Vdet-IC	1.7V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W018	-	R3111Q182B	Vdet-IC	1.8V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W019	-	R3111Q192B	Vdet-IC	1.9V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W020	-	R3111Q202B	Vdet-IC	2.0V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W021	-	R3111Q212B	Vdet-IC	2.1V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W022	-	R3111Q222B	Vdet-IC	2.2V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W023	-	R3111Q232B	Vdet-IC	2.3V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W024	-	R3111Q242B	Vdet-IC	2.4V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W025	-	R3111Q252B	Vdet-IC	2.5V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W026	-	R3111Q262B	Vdet-IC	2.6V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W027	-	R3111Q272B	Vdet-IC	2.7V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W028	-	R3111Q282B	Vdet-IC	2.8V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W029	-	R3111Q292B	Vdet-IC	2.9V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W030	-	R3111Q302B	Vdet-IC	3.0V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W031	-	R3111Q312B	Vdet-IC	3.1V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W032	-	R3111Q322B	Vdet-IC	3.2V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W033	-	R3111Q332B	Vdet-IC	3.3V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W034	-	R3111Q342B	Vdet-IC	3.4V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W035	-	R3111Q352B	Vdet-IC	3.5V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W036	-	R3111Q362B	Vdet-IC	3.6V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W037	-	R3111Q372B	Vdet-IC	3.7V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W038	-	R3111Q382B	Vdet-IC	3.8V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W039	-	R3111Q392B	Vdet-IC	3.9V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W040	-	R3111Q402B	Vdet-IC	4.0V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W041	-	R3111Q412B	Vdet-IC	4.1V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W042	-	R3111Q422B	Vdet-IC	4.2V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W043	-	R3111Q432B	Vdet-IC	4.3V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W044	-	R3111Q442B	Vdet-IC	4.4V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W045	-	R3111Q452B	Vdet-IC	4.5V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W046	-	R3111Q462B	Vdet-IC	4.6V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W047	-	R3111Q472B	Vdet-IC	4.7V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W048	-	R3111Q482B	Vdet-IC	4.8V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W049	-	R3111Q492B	Vdet-IC	4.9V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W050	-	R3111Q502B	Vdet-IC	5.0V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W051	-	R3111Q512B	Vdet-IC	5.1V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W052	-	R3111Q522B	Vdet-IC	5.2V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W053	-	R3111Q532B	Vdet-IC	5.3V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W054	-	R3111Q542B	Vdet-IC	5.4V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W055	-	R3111Q552B	Vdet-IC	5.5V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W056	-	R3111Q562B	Vdet-IC	5.6V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W057	-	R3111Q572B	Vdet-IC	5.7V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W058	-	R3111Q582B	Vdet-IC	5.8V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W059	-	R3111Q592B	Vdet-IC	5.9V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
W060	-	R3111Q602B	Vdet-IC	6.0V±2%, +Reset ODO	SC-88A	28ru	VD6	6ma	Ric
W0A	-	R3119N046A	Vdet-IC	4.6V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0B	-	R3119N047A	Vdet-IC	4.7V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0C	-	R3119N048A	Vdet-IC	4.8V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0D	-	R3119N049A	Vdet-IC	4.9V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0E	-	R3119N050A	Vdet-IC	5.0V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0F	-	R3119N051A	Vdet-IC	5.1V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0G	-	R3119N052A	Vdet-IC	5.2V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0H	-	R3119N053A	Vdet-IC	5.3V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0J	-	R3119N054A	Vdet-IC	5.4V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0K	-	R3119N055A	Vdet-IC	5.5V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0L	-	R3119N056A	Vdet-IC	5.6V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0M	-	R3119N057A	Vdet-IC	5.7V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0N	-	R3119N058A	Vdet-IC	5.8V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0P	-	R3119N059A	Vdet-IC	5.9V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0R	-	R3119N060A	Vdet-IC	6.0V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0S	-	R3119N061A	Vdet-IC	6.1V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0T	-	R3119N062A	Vdet-IC	6.2V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0U	-	R3119N063A	Vdet-IC	6.3V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0V	-	R3119N064A	Vdet-IC	6.4V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0W	-	R3119N065A	Vdet-IC	6.5V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0X	-	R3119N066A	Vdet-IC	6.6V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0Y	-	R3119N067A	Vdet-IC	6.7V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W0Z	-	R3119N068A	Vdet-IC	6.8V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
W1	-	BD46235G	Vdet-IC	2.3V±1%, -MR, -Reset PPO, 500ms	SSOP-5	28vdp	VD5	6c	Rhm
W1	-	FMW1	Si-npn	Dual, GP, 60V, 150mA, 180MHz	SOT-23-5	28	T11	6a	Rhm
W1	-	MC74VHC1GT125DF	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log14	6b	Ons
W1	-	MC74VHC1GT125DT	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log14	6b	Ons
W1	-	R1210N311D	DC-DC-IC	PWM step-up, 3.1V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
W11	-	FMW11	Si-npn	Dual, HF, 30V, 50mA, >600MHz	SOT-23-5	28ty	T24	6a	Rhm
W13	-	FMW13	Si-npn	Dual, HF, 30V, 50mA, >900MHz	SOT-23-5	28ty	T24	6a	Rhm
W15	-	R1163N151D	LVR-IC	LDO, 1.5V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W16	-	R1163N161D	LVR-IC	LDO, 1.6V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W17	-	R1163N171D	LVR-IC	LDO, 1.7V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W18	-	R1163N181D	LVR-IC	LDO, 1.8V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W19	-	R1163N191D	LVR-IC	LDO, 1.9V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W1A	-	R3119N046E	Vdet-IC	4.6V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1B	-	R3119N047E	Vdet-IC	4.7V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1C	-	R3119N048E	Vdet-IC	4.8V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1D	-	R3119N049E	Vdet-IC	4.9V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1E	-	R3119N050E	Vdet-IC	5.0V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1F	-	R3119N051E	Vdet-IC	5.1V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1G	-	R3119N052E	Vdet-IC	5.2V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1H	-	R3119N053E	Vdet-IC	5.3V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1J	-	R3119N054E	Vdet-IC	5.4V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1K	-	R3119N055E	Vdet-IC	5.5V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1L	-	R3119N056E	Vdet-IC	5.6V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1M	-	R3119N057E	Vdet-IC	5.7V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1N	-	R3119N058E	Vdet-IC	5.8V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1P	-	R3119N059E	Vdet-IC	5.9V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1R	-	R3119N060E	Vdet-IC	6.0V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1S	-	R3119N061E	Vdet-IC	6.1V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1T	-	R3119N062E	Vdet-IC	6.2V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1U	-	R3119N063E	Vdet-IC	6.3V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1V	-	R3119N064E	Vdet-IC	6.4V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1W	-	R3119N065E	Vdet-IC	6.5V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1X	-	R3119N066E	Vdet-IC	6.6V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1Y	-	R3119N067E	Vdet-IC	6.7V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W1Z	-	R3119N068E	Vdet-IC	6.8V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
W2	-	BD46481G	Vdet-IC	4.8V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
W2	-	FMW2	Si-npn	Dual, GP, 60V, 150mA, 180MHz	SOT-23-5	28ty	T24	6a	Rhm
W2	-	MC74VHC1G126DF	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log13	6b	Ons
W2	-	MC74VHC1G126DT	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log13	6b	Ons
W2	-	R1210N321D	DC-DC-IC	PWM step-up, 3.2V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
W2-	-	RT9818C-30PB	Vdet-IC	3.0V±1.5%, -Reset ODO, Td=220ms	SOT-23-5	28vdm	VD6	6a	Rct
W20	-	R1163N201D	LVR-IC	LDO, 2.0V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W20	-	TK11120S	LVR-IC	LDO, 2.0V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W21	-	R1163N211D	LVR-IC	LDO, 2.1V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W21	-	TK11121S	LVR-IC	LDO, 2.1V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W22	-	R1163N221D	LVR-IC	LDO, 2.2V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
W22	-	TK11122S	LVR-IC	LDO, 2.3V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W23	-	R1163N231D	LVR-IC	LDO, 2.3V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W23	-	TK11123S	LVR-IC	LDO, 2.3V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W24	-	R1163N241D	LVR-IC	LDO, 2.4V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W24	-	TK11124S	LVR-IC	LDO, 2.4V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W25	-	R1163N251D	LVR-IC	LDO, 2.5V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W25	-	TK11125S	LVR-IC	LDO, 2.5V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W26	-	R1163N261D	LVR-IC	LDO, 2.6V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W26	-	TK11126S	LVR-IC	LDO, 2.6V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W27	-	R1163N271D	LVR-IC	LDO, 2.7V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W27	-	TK11127S	LVR-IC	LDO, 2.7V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W28	-	R1163N281D	LVR-IC	LDO, 2.8V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W28	-	TK11128S	LVR-IC	LDO, 2.8V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W29	-	R1163N291D	LVR-IC	LDO, 2.9V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W29	-	TK11129S	LVR-IC	LDO, 2.9V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W3	-	BD46471G	Vdet-IC	4.7V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
W3	-	FMW3	Si-npn	Dual, GP, 120V, 50mA, 140MHz	SOT-23-5	28	T11	6a	Rhm
W3	-	MC74VHC1GT126DF	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log13	6b	Ons
W3	-	MC74VHC1GT126DT	CMOS-Log	Bus buffer gate with 3-state output	SOT-23-5	28	Log13	6b	Ons
W3	-	R1210N331D	DC-DC-IC	PWM step-up, 3.3V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
W3-	-	RT9198-24PBR	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
W30	-	R1163N301D	LVR-IC	LDO, 3.0V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W30	-	TK11130S	LVR-IC	LDO, 3.0V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W31	-	R1163N311D	LVR-IC	LDO, 3.1V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W31	-	TK11131S	LVR-IC	LDO, 3.1V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W32	-	R1163N321D	LVR-IC	LDO, 3.2V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W32	-	TK11132S	LVR-IC	LDO, 3.2V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W33	-	R1163N331D	LVR-IC	LDO, 3.3V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W33	-	TK11133S	LVR-IC	LDO, 3.3V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W34	-	R1163N341D	LVR-IC	LDO, 3.4V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W34	-	TK11134S	LVR-IC	LDO, 3.4V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W35	-	R1163N351D	LVR-IC	LDO, 3.5V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W35	-	TK11135S	LVR-IC	LDO, 3.5V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W36	-	R1163N361D	LVR-IC	LDO, 3.6V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W36	-	TK11136S	LVR-IC	LDO, 3.6V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W37	-	R1163N371D	LVR-IC	LDO, 3.7V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W37	-	TK11137S	LVR-IC	LDO, 3.7V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W38	-	R1163N381D	LVR-IC	LDO, 3.8V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W38	-	TK11138S	LVR-IC	LDO, 3.8V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W39	-	R1163N391D	LVR-IC	LDO, 3.9V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W39	-	TK11139S	LVR-IC	LDO, 3.9V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W4	-	BD46461G	Vdet-IC	4.6V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
W4	-	FMW4	Si-npn	Dual, GP, 120V, 50mA, 140MHz	SOT-23-5	28ty	T24	6a	Rhm
W4	-	R1210N341D	DC-DC-IC	PWM step-up, 3.4V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
W4-	-	RT9198-26PBR	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
W40	-	R1163N401D	LVR-IC	LDO, 4.0V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W40	-	TK11140S	LVR-IC	LDO, 4.0V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W41	-	R1163N181D5	LVR-IC	LDO, 1.85V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W41	-	TK11141S	LVR-IC	LDO, 4.1V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W42	-	R1163N281D5	LVR-IC	LDO, 2.85V±1.5%, 150mA, +CE, CL, AE(Mode)	SOT-23-5	28x9	VR10	6g	Ric
W42	-	TK11142S	LVR-IC	LDO, 4.2V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W43	-	TK11143S	LVR-IC	LDO, 4.3V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W44	-	TK11144S	LVR-IC	LDO, 4.4V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W45	-	TK11145S	LVR-IC	LDO, 4.5V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W46	-	TK11146S	LVR-IC	LDO, 4.6V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W47	-	TK11147S	LVR-IC	LDO, 4.7V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W48	-	TK11148S	LVR-IC	LDO, 4.8V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W49	-	TK11149S	LVR-IC	LDO, 4.9V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W5	-	BD46451G	Vdet-IC	4.5V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
W5	-	FMW5	Si-npn	Dual, GP, 50V, 100mA	SOT-23-5	28	T11	6a	Rhm
W5	-	R1210N351D	DC-DC-IC	PWM step-up, 3.5V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
W5-	-	RT9198-27PBR	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
W50	-	TK11150S	LVR-IC	LDO, 5.0V±1.5%, 200mA, -CE	SOT-23-5	28un	VR7	6k	Tok
W6	-	BD46441G	Vdet-IC	4.4V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
W6	-	FMW6	Si-npn	Dual, HF, 30V, 50mA, 300mW, B=27..270, 1.5GHz	SC-74A	28	T18	6a	Rhm
W6	-	R1210N361D	DC-DC-IC	PWM step-up, 3.6V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
W6	-	UMW6N	Si-npn	Dual, HF, 30V, 50mA, 150mW, B=27..270, 1.5GHz	SC-88A	28	T18	6a	Rhm
W6-	-	RT9198-1HPBR	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
W7	-	BD46431G	Vdet-IC	4.3V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
W7	-	R1210N371D	DC-DC-IC	PWM step-up, 3.7V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
W8	-	BD46421G	Vdet-IC	4.2V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
W8	-	FMW8	Si-npn	Dual, HF, 20V, 50mA, >1400MHz	SOT-23-5	28	T11	6a	Rhm
W8	-	R1210N381D	DC-DC-IC	PWM step-up, 3.8V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
W9	-	BD46411G	Vdet-IC	4.1V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
W9	-	FMW9	Si-npn	Dual, HF, 20V, 50mA, >1400MHz	SOT-23-5	28ty	T24	6a	Rhm
W9	-	R1210N391D	DC-DC-IC	PWM step-up, 3.9V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
W9-	-	RT9193-17PB	LVR-IC	LDO, 1.7V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
WA	-	BD46401G	Vdet-IC	4.0V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WA	-	R1210N401D	DC-DC-IC	PWM step-up, 4V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WA	-	RN5RK301A	DC-DC-IC	VFM step-up, Vout=3.0V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WA-	-	RT9818A-22PB	Vdet-IC	2.2V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Rct
WAA	-	R3117N073A	Vdet-IC	0.7V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAB	-	R3117N083A	Vdet-IC	0.8V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAC	-	R3117N093A	Vdet-IC	0.9V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAD	-	R3117N103A	Vdet-IC	1.0V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAE	-	R3117N113A	Vdet-IC	1.1V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAF	-	R3117N123A	Vdet-IC	1.2V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAG	-	R3117N133A	Vdet-IC	1.3V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAH	-	R3117N143A	Vdet-IC	1.4V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAJ	-	R3117N153A	Vdet-IC	1.5V±15mV, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAK	-	R3117N163A	Vdet-IC	1.6V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAL	-	R3117N173A	Vdet-IC	1.7V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAM	-	R3117N183A	Vdet-IC	1.8V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAN	-	R3117N193A	Vdet-IC	1.9V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAP	-	R3117N203A	Vdet-IC	2.0V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAQ	-	R3117N213A	Vdet-IC	2.1V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAR	-	R3117N223A	Vdet-IC	2.2V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAS	-	R3117N233A	Vdet-IC	2.3V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAT	-	R3117N243A	Vdet-IC	2.4V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAU	-	R3117N253A	Vdet-IC	2.5V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAV	-	R3117N263A	Vdet-IC	2.6V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAW	-	R3117N273A	Vdet-IC	2.7V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAX	-	R3117N283A	Vdet-IC	2.8V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAY	-	R3117N293A	Vdet-IC	2.9V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WAZ	-	R3117N303A	Vdet-IC	3.0V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
WB	-	BD46391G	Vdet-IC	3.9V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WB	-	R1210N411D	DC-DC-IC	PWM step-up, 4.1V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WB	-	RN5RK241A	DC-DC-IC	VFM step-up, Vout=2.4V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WB-	-	RT9818A-26PB	Vdet-IC	2.6V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Rct
WB=	-	RT9818A-26GB	Vdet-IC	2.6V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Rct
WBA	-	R3117N073C	Vdet-IC	0.7V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBB	-	R3117N083C	Vdet-IC	0.8V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBC	-	R3117N093C	Vdet-IC	0.9V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBD	-	R3117N103C	Vdet-IC	1.0V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBE	-	R3117N113C	Vdet-IC	1.1V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBF	-	R3117N123C	Vdet-IC	1.2V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBG	-	R3117N133C	Vdet-IC	1.3V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBH	-	R3117N143C	Vdet-IC	1.4V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBJ	-	R3117N153C	Vdet-IC	1.5V±15mV, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBK	-	R3117N163C	Vdet-IC	1.6V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBL	-	R3117N173C	Vdet-IC	1.7V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBM	-	R3117N183C	Vdet-IC	1.8V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBN	-	R3117N193C	Vdet-IC	1.9V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBP	-	R3117N203C	Vdet-IC	2.0V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBQ	-	R3117N213C	Vdet-IC	2.1V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBR	-	R3117N223C	Vdet-IC	2.2V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBS	-	R3117N233C	Vdet-IC	2.3V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBT	-	R3117N243C	Vdet-IC	2.4V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBU	-	R3117N253C	Vdet-IC	2.5V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBV	-	R3117N263C	Vdet-IC	2.6V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBW	-	R3117N273C	Vdet-IC	2.7V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBX	-	R3117N283C	Vdet-IC	2.8V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBY	-	R3117N293C	Vdet-IC	2.9V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WBZ	-	R3117N303C	Vdet-IC	3.0V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
WC	-	BD46381G	Vdet-IC	3.8V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WC	-	R1210N421D	DC-DC-IC	PWM step-up, 4.2V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WC	-	RN5RK501A	DC-DC-IC	VFM step-up, Vout=5.0V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WD	-	BD46371G	Vdet-IC	3.7V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WD	-	R1210N431D	DC-DC-IC	PWM step-up, 4.3V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WD	-	RN5RK201A	DC-DC-IC	VFM step-up, Vout=2.0V±1.5%	SOT-23-5	28sc	DC3	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
WD-	-	RT9818C-27PB	Vdet-IC	2.7V±1.5%, -Reset ODO, Td=220ms	SOT-23-5	28vdm	VD6	6a	Rct
WD=	-	RT9818C-27GB	Vdet-IC	2.7V±1.5%, -Reset ODO, Td=220ms	SOT-23-5	28vdm	VD6	6a	Rct
WE	-	BD46361G	Vdet-IC	3.6V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WE	-	R1210N441D	DC-DC-IC	PWM step-up, 4.4V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WE	-	RN5RK251A	DC-DC-IC	VFM step-up, Vout=2.5V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WE-	-	RT9013-12PB	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
WF	-	BD46351G	Vdet-IC	3.5V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WF	-	R1210N451D	DC-DC-IC	PWM step-up, 4.5V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WF	-	RN5RK331A	DC-DC-IC	VFM step-up, Vout=3.3V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WF-	-	RT9013-1BPB	LVR-IC	LDO, 1.25V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
WG	-	BD46341G	Vdet-IC	3.4V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WG	-	R1210N461D	DC-DC-IC	PWM step-up, 4.6V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WG	-	RN5RK551A	DC-DC-IC	VFM step-up, Vout=5.5V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WG-	-	RT9013-15PB	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
WG=	-	RT9013-15GB	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
WH	-	BD46331G	Vdet-IC	3.3V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WH	-	R1210N471D	DC-DC-IC	PWM step-up, 4.7V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WH	-	RN5RK221A	DC-DC-IC	VFM step-up, Vout=2.2V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WH-	-	RT9013-25PB	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
WJ	-	BD46321G	Vdet-IC	3.2V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WJ	-	R1210N481D	DC-DC-IC	PWM step-up, 4.8V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WJ	-	RN5RK271A	DC-DC-IC	VFM step-up, Vout=2.7V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WJ-	-	RT9013-33PB	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
WJ=	-	RT9013-33GB	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
WJ1	-	S-1315A42-M5T1U3	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJ2	-	S-1315A34-M5T1U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJ3	-	S-1315A35-M5T1U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJ4	-	S-1315A36-M5T1U3	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJ5	-	S-1315A37-M5T1U3	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJ6	-	S-1315A38-M5T1U3	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJ7	-	S-1315A39-M5T1U3	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJ8	-	S-1315A40-M5T1U3	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJ9	-	S-1315A41-M5T1U3	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJA	-	S-1315A10-M5T1U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJB	-	S-1315A11-M5T1U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJC	-	S-1315A12-M5T1U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJD	-	S-1315A13-M5T1U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJE	-	S-1315A14-M5T1U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJF	-	S-1315A15-M5T1U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJG	-	S-1315A16-M5T1U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJH	-	S-1315A17-M5T1U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJI	-	S-1315A18-M5T1U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJJ	-	S-1315A1J-M5T1U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJK	-	S-1315A19-M5T1U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJL	-	S-1315A20-M5T1U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJM	-	S-1315A21-M5T1U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJN	-	S-1315A22-M5T1U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJO	-	S-1315A23-M5T1U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJP	-	S-1315A24-M5T1U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJQ	-	S-1315A25-M5T1U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJR	-	S-1315A26-M5T1U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJS	-	S-1315A27-M5T1U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJT	-	S-1315A28-M5T1U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJU	-	S-1315A2J-M5T1U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJV	-	S-1315A29-M5T1U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJW	-	S-1315A30-M5T1U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJX	-	S-1315A31-M5T1U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJY	-	S-1315A32-M5T1U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WJZ	-	S-1315A33-M5T1U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL, PDR	SOT-23-5	28cx	VR4	6g	Sii
WK	-	BD46311G	Vdet-IC	3.1V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WK	-	R1210N491D	DC-DC-IC	PWM step-up, 4.9V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WK	-	RN5RK361A	DC-DC-IC	VFM step-up, Vout=3.6V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WK1	-	S-1315B42-M5T1U3	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WK2	-	S-1315B34-M5T1U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WK3	-	S-1315B35-M5T1U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WK4	-	S-1315B36-M5T1U3	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WK5	-	S-1315B37-M5T1U3	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WK6	-	S-1315B38-M5T1U3	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WK7	-	S-1315B39-M5T1U3	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WK8	-	S-1315B40-M5T1U3	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
WK9	-	S-1315B41-M5T1U3	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKA	-	S-1315B10-M5T1U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKB	-	S-1315B11-M5T1U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKC	-	S-1315B12-M5T1U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKD	-	S-1315B13-M5T1U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKE	-	S-1315B14-M5T1U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKF	-	S-1315B15-M5T1U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKG	-	S-1315B16-M5T1U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKH	-	S-1315B17-M5T1U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKI	-	S-1315B18-M5T1U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKJ	-	S-1315B1J-M5T1U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKK	-	S-1315B19-M5T1U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKL	-	S-1315B20-M5T1U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKM	-	S-1315B21-M5T1U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKN	-	S-1315B22-M5T1U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKO	-	S-1315B23-M5T1U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKP	-	S-1315B24-M5T1U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKQ	-	S-1315B25-M5T1U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKR	-	S-1315B26-M5T1U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKS	-	S-1315B27-M5T1U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKT	-	S-1315B28-M5T1U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKU	-	S-1315B2J-M5T1U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKV	-	S-1315B29-M5T1U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKW	-	S-1315B30-M5T1U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKX	-	S-1315B31-M5T1U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKY	-	S-1315B32-M5T1U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WKZ	-	S-1315B33-M5T1U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Sii
WL	-	BD46301G	Vdet-IC	3.0V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WL	-	RN5RK261A	DC-DC-IC	VFM step-up, Vout=2.6V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WL1	-	S-1315C42-M5T1U3	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WL2	-	S-1315C34-M5T1U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WL3	-	S-1315C35-M5T1U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WL4	-	S-1315C36-M5T1U3	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WL5	-	S-1315C37-M5T1U3	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WL6	-	S-1315C38-M5T1U3	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WL7	-	S-1315C39-M5T1U3	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WL8	-	S-1315C40-M5T1U3	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WL9	-	S-1315C41-M5T1U3	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLA	-	S-1315C10-M5T1U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLB	-	S-1315C11-M5T1U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLC	-	S-1315C12-M5T1U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLD	-	S-1315C13-M5T1U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLE	-	S-1315C14-M5T1U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLF	-	S-1315C15-M5T1U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLG	-	S-1315C16-M5T1U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLH	-	S-1315C17-M5T1U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLI	-	S-1315C18-M5T1U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLJ	-	S-1315C1J-M5T1U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLK	-	S-1315C19-M5T1U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLL	-	S-1315C20-M5T1U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLM	-	S-1315C21-M5T1U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLN	-	S-1315C22-M5T1U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLO	-	S-1315C23-M5T1U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLP	-	S-1315C24-M5T1U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLQ	-	S-1315C25-M5T1U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLR	-	S-1315C26-M5T1U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLS	-	S-1315C27-M5T1U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLT	-	S-1315C28-M5T1U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLU	-	S-1315C2J-M5T1U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLV	-	S-1315C29-M5T1U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLW	-	S-1315C30-M5T1U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLX	-	S-1315C31-M5T1U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLY	-	S-1315C32-M5T1U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WLZ	-	S-1315C33-M5T1U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, PDR	SOT-23-5	28cx	VR4	6g	Sii
WM	-	BD46291G	Vdet-IC	2.9V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WM	-	R1210N511D	DC-DC-IC	PWM step-up, 5.1V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WM	-	RN5RK281A	DC-DC-IC	VFM step-up, Vout=2.8V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WM-	-	RT9198-1HPB	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
WM1	-	S-1315D42-M5T1U3	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WM2	-	S-1315D34-M5T1U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
WM3	-	S-1315D35-M5T1U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WM4	-	S-1315D36-M5T1U3	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WM5	-	S-1315D37-M5T1U3	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WM6	-	S-1315D38-M5T1U3	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WM7	-	S-1315D39-M5T1U3	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WM8	-	S-1315D40-M5T1U3	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WM9	-	S-1315D41-M5T1U3	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMA	-	S-1315D10-M5T1U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMB	-	S-1315D11-M5T1U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMC	-	S-1315D12-M5T1U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMD	-	S-1315D13-M5T1U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WME	-	S-1315D14-M5T1U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMF	-	S-1315D15-M5T1U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMG	-	S-1315D16-M5T1U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMH	-	S-1315D17-M5T1U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMI	-	S-1315D18-M5T1U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMJ	-	S-1315D1J-M5T1U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMK	-	S-1315D19-M5T1U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WML	-	S-1315D20-M5T1U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMM	-	S-1315D21-M5T1U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMN	-	S-1315D22-M5T1U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMO	-	S-1315D23-M5T1U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMP	-	S-1315D24-M5T1U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMQ	-	S-1315D25-M5T1U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMR	-	S-1315D26-M5T1U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMS	-	S-1315D27-M5T1U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMT	-	S-1315D28-M5T1U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMU	-	S-1315D2J-M5T1U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMV	-	S-1315D29-M5T1U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMW	-	S-1315D30-M5T1U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMX	-	S-1315D31-M5T1U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMY	-	S-1315D32-M5T1U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WMZ	-	S-1315D33-M5T1U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SOT-23-5	28cx	VR4	6g	Sii
WN	-	BD46281G	Vdet-IC	2.8V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WN	-	R1210N521D	DC-DC-IC	PWM step-up, 5.2V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WN	-	RN5RK321A	DC-DC-IC	VFM step-up, Vout=3.2V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WN-	-	RT9818A-33PB	Vdet-IC	3.3V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Rct
WP	-	BD46271G	Vdet-IC	2.7V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WP	-	R1210N531D	DC-DC-IC	PWM step-up, 5.3V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WP	-	RN5RK371A	DC-DC-IC	VFM step-up, Vout=3.7V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WP-	-	RT9818A-23PB	Vdet-IC	2.3V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Rct
WQ	-	BD46261G	Vdet-IC	2.6V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WQ	-	R1210N541D	DC-DC-IC	PWM step-up, 5.4V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WQ	-	RN5RK391A	DC-DC-IC	VFM step-up, Vout=3.9V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WQ-	-	RT9818A-25PB	Vdet-IC	2.5V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Rct
WR	-	BD46251G	Vdet-IC	2.5V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WR	-	R1210N551D	DC-DC-IC	PWM step-up, 5.5V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WR	-	RN5RK351A	DC-DC-IC	VFM step-up, Vout=3.5V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WR-	-	RT9818A-27PB	Vdet-IC	2.7V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Rct
WS	-	BD46241G	Vdet-IC	2.4V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WS	-	R1210N561D	DC-DC-IC	PWM step-up, 5.6V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WS	-	RN5RK521A	DC-DC-IC	VFM step-up, Vout=5.2V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WS12	-	WL2803E12-5	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS13	-	WL2803E13-5	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS14	-	WL2803E14-5	LVR-IC	LDO, 1.4V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS15	-	WL2803E15-5	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS16	-	WL2803E16-5	LVR-IC	LDO, 1.6V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS17	-	WL2803E17-5	LVR-IC	LDO, 1.7V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS18	-	WL2803E18-5	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS19	-	WL2803E19-5	LVR-IC	LDO, 1.9V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS20	-	WL2803E20-5	LVR-IC	LDO, 2.0V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS21	-	WL2803E21-5	LVR-IC	LDO, 2.1V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS22	-	WL2803E22-5	LVR-IC	LDO, 2.2V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS23	-	WL2803E23-5	LVR-IC	LDO, 2.3V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS24	-	WL2803E24-5	LVR-IC	LDO, 2.4V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS25	-	WL2803E25-5	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS26	-	WL2803E26-5	LVR-IC	LDO, 2.6V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS27	-	WL2803E27-5	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS28	-	WL2803E28-5	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS29	-	WL2803E29-5	LVR-IC	LDO, 2.9V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
WS30	-	WL2803E30-5	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS31	-	WL2803E31-5	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS32	-	WL2803E32-5	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WS33	-	WL2803E33-5	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5L	28cx	VR4	6ra	Ws
WT	-	BD46231G	Vdet-IC	2.3V±1%, -MR, -Reset PPO, 100ms	SSOP-5	28vdp	VD5	6c	Rhm
WT	-	R1210N571D	DC-DC-IC	PWM step-up, 5.7V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WT	-	RN5RK401A	DC-DC-IC	VFM step-up, Vout=4.0V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WU	-	BD46482G	Vdet-IC	4.8V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
WU	-	R1210N581D	DC-DC-IC	PWM step-up, 5.8V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WU	-	RN5RK511A	DC-DC-IC	VFM step-up, Vout=5.1V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WV	-	BD46472G	Vdet-IC	4.7V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
WV	-	R1210N591D	DC-DC-IC	PWM step-up, 5.9V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
WV	-	RN5RK451A	DC-DC-IC	VFM step-up, Vout=4.5V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WW	-	BD46462G	Vdet-IC	4.6V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
WW	-	RN5RK211A	DC-DC-IC	VFM step-up, Vout=2.1V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WW-	-	RT9013-30PB	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
WX	-	BD46452G	Vdet-IC	4.5V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
WX	-	RN5RK311A	DC-DC-IC	VFM step-up, Vout=3.1V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
WX-	-	RT9013-31PB	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
WX=	-	RT9013-31GB	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
WY	-	BD46442G	Vdet-IC	4.4V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
WY-	-	RT9818A-37PB	Vdet-IC	3.7V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Rct
WY=	-	RT9818A-37GB	Vdet-IC	3.7V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Rct
WZ	-	BD46432G	Vdet-IC	4.3V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
X0	-	BD46422G	Vdet-IC	4.2V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
X0-	-	RT9198T-18PBR	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
X00	-	R1131N181A5	LVR-IC	LDO, 1.85V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X009	-	R3112Q092A	Vdet-IC	0.91V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X01	-	R1131N281A5	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X010	-	R3112Q102A	Vdet-IC	1.0V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X011	-	R3112Q112A	Vdet-IC	1.1V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X012	-	R3112Q122A	Vdet-IC	1.2V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X013	-	R3112Q132A	Vdet-IC	1.3V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X014	-	R3112Q142A	Vdet-IC	1.4V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X015	-	R3112Q152A	Vdet-IC	1.5V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X016	-	R3112Q162A	Vdet-IC	1.6V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X017	-	R3112Q172A	Vdet-IC	1.7V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X018	-	R3112Q182A	Vdet-IC	1.8V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X019	-	R3112Q192A	Vdet-IC	1.9V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X02	-	R1131N121A5	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X020	-	R3112Q202A	Vdet-IC	2.0V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X021	-	R3112Q212A	Vdet-IC	2.1V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X022	-	R3112Q222A	Vdet-IC	2.2V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X023	-	R3112Q232A	Vdet-IC	2.3V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X024	-	R3112Q242A	Vdet-IC	2.4V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X025	-	R3112Q252A	Vdet-IC	2.5V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X026	-	R3112Q262A	Vdet-IC	2.6V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X027	-	R3112Q272A	Vdet-IC	2.7V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X028	-	R3112Q282A	Vdet-IC	2.8V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X029	-	R3112Q292A	Vdet-IC	2.9V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X030	-	R3112Q302A	Vdet-IC	3V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X031	-	R3112Q312A	Vdet-IC	3.1V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X032	-	R3112Q322A	Vdet-IC	3.2V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X033	-	R3112Q332A	Vdet-IC	3.3V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X034	-	R3112Q342A	Vdet-IC	3.4V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X035	-	R3112Q352A	Vdet-IC	3.5V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X036	-	R3112Q362A	Vdet-IC	3.6V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X037	-	R3112Q372A	Vdet-IC	3.7V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X038	-	R3112Q382A	Vdet-IC	3.8V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X039	-	R3112Q392A	Vdet-IC	3.9V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X040	-	R3112Q402A	Vdet-IC	4V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X041	-	R3112Q412A	Vdet-IC	4.1V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X042	-	R3112Q422A	Vdet-IC	4.2V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X043	-	R3112Q432A	Vdet-IC	4.3V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X044	-	R3112Q442A	Vdet-IC	4.4V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X045	-	R3112Q452A	Vdet-IC	4.5V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X046	-	R3112Q462A	Vdet-IC	4.6V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X047	-	R3112Q472A	Vdet-IC	4.7V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X048	-	R3112Q482A	Vdet-IC	4.8V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X049	-	R3112Q492A	Vdet-IC	4.9V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
X050	-	R3112Q502A	Vdet-IC	5V±2%, -Reset PPO	SC-88A	28rv	VD3	6ma	Ric
X08	-	R1131N081A	LVR-IC	LDO, 0.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X09	-	R1131N091A	LVR-IC	LDO, 0.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X0A	-	R3119N069A	Vdet-IC	6.9V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0A	-	XC6118N30AMR-G	Vdet-IC	3.0V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
X0B	-	R3119N070A	Vdet-IC	7.0V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0B	-	XC6118N30BMR-G	Vdet-IC	3.0V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
X0C	-	R3119N071A	Vdet-IC	7.1V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0C	-	XC6118N30CMR-G	Vdet-IC	3.0V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
X0D	-	R3119N072A	Vdet-IC	7.2V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0D	-	XC6118N30DMR-G	Vdet-IC	3.0V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
X0E	-	R3119N073A	Vdet-IC	7.3V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0F	-	R3119N074A	Vdet-IC	7.4V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0G	-	R3119N075A	Vdet-IC	7.5V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0H	-	R3119N076A	Vdet-IC	7.6V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0J	-	R3119N077A	Vdet-IC	7.7V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0K	-	R3119N078A	Vdet-IC	7.8V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0L	-	R3119N079A	Vdet-IC	7.9V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0M	-	R3119N080A	Vdet-IC	8.0V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0N	-	R3119N081A	Vdet-IC	8.1V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0P	-	R3119N082A	Vdet-IC	8.2V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0R	-	R3119N083A	Vdet-IC	8.3V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0S	-	R3119N084A	Vdet-IC	8.4V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0T	-	R3119N085A	Vdet-IC	8.5V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0U	-	R3119N086A	Vdet-IC	8.6V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0V	-	R3119N087A	Vdet-IC	8.7V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0W	-	R3119N088A	Vdet-IC	8.8V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0X	-	R3119N089A	Vdet-IC	8.9V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0Y	-	R3119N090A	Vdet-IC	9.0V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X0Z	-	R3119N091A	Vdet-IC	9.1V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
X1	-	BD46412G	Vdet-IC	4.1V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
X1-	-	RT9198T-25PB	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
X10	-	R1131N101A	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X11	-	R1131N111A	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X12	-	R1131N121A	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X13	-	R1131N131A	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X14	-	R1131N141A	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X15	-	R1131N151A	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X15	eb	XC9110D151MR	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X16	-	R1131N161A	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X16	eb	XC9110D161MR	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X17	-	R1131N171A	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X17	eb	XC9110D171MR	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X18	-	R1131N181A	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X18	eb	XC9110D181MR	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X19	-	R1131N191A	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X19	eb	XC9110D191MR	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X1A	-	R3119N069E	Vdet-IC	6.9V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1A	-	XC6118N31AMR-G	Vdet-IC	3.1V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
X1B	-	R3119N070E	Vdet-IC	7.0V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1B	-	XC6118N31BMR-G	Vdet-IC	3.1V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
X1C	-	R3119N071E	Vdet-IC	7.1V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1C	-	XC6118N31CMR-G	Vdet-IC	3.1V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
X1D	-	R3119N072E	Vdet-IC	7.2V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1D	-	XC6118N31DMR-G	Vdet-IC	3.1V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
X1E	-	R3119N073E	Vdet-IC	7.3V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1F	-	R3119N074E	Vdet-IC	7.4V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1G	-	R3119N075E	Vdet-IC	7.5V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1H	-	R3119N076E	Vdet-IC	7.6V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1J	-	R3119N077E	Vdet-IC	7.7V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1K	-	R3119N078E	Vdet-IC	7.8V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1L	-	R3119N079E	Vdet-IC	7.9V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1M	-	R3119N080E	Vdet-IC	8.0V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1N	-	R3119N081E	Vdet-IC	8.1V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1P	-	R3119N082E	Vdet-IC	8.2V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1R	-	R3119N083E	Vdet-IC	8.3V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1S	-	R3119N084E	Vdet-IC	8.4V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1T	-	R3119N085E	Vdet-IC	8.5V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1U	-	R3119N086E	Vdet-IC	8.6V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1V	-	R3119N087E	Vdet-IC	8.7V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
X1W	-	R3119N088E	Vdet-IC	8.8V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1X	-	R3119N089E	Vdet-IC	8.9V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1Y	-	R3119N090E	Vdet-IC	9.0V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X1Z	-	R3119N091E	Vdet-IC	9.1V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
X2	-	BD46402G	Vdet-IC	4.0V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
X2	-	R1210N222C	DC-DC-IC	PWM step-up, 2.1V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
X20	-	R1131N201A	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X20	eb	XC9110D201MR	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X21	-	R1131N211A	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X21	eb	XC9110D211MR	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X22	-	R1131N221A	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X22	eb	XC9110D221MR	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X23	-	R1131N231A	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X23	eb	XC9110D231MR	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X24	-	R1131N241A	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X24	eb	XC9110D241MR	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X25	-	R1131N251A	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X25	eb	XC9110D251MR	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X26	-	R1131N261A	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X26	eb	XC9110D261MR	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X27	-	R1131N271A	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X27	eb	XC9110D271MR	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X28	-	R1131N281A	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X28	eb	XC9110D281MR	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X29	-	R1131N291A	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X29	eb	XC9110D291MR	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X2A	-	XC6118N32AMR-G	Vdet-IC	3.2V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
X2B	-	XC6118N32BMR-G	Vdet-IC	3.2V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
X2C	-	XC6118N32CMR-G	Vdet-IC	3.2V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
X2D	-	XC6118N32DMR-G	Vdet-IC	3.2V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
X3	-	BD46392G	Vdet-IC	3.9V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
X3	-	R1210N232C	DC-DC-IC	PWM step-up, 2.3V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
X30	-	R1131N301A	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X30	eb	XC9110D301MR	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X31	-	R1131N311A	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X31	eb	XC9110D311MR	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X32	-	R1131N321A	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X32	eb	XC9110D321MR	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X33	-	R1131N331A	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-23-5	28cx	VR4	6g	Ric
X33	eb	XC9110D331MR	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X34	eb	XC9110D341MR	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X35	eb	XC9110D351MR	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X36	eb	XC9110D361MR	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X37	eb	XC9110D371MR	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X38	eb	XC9110D381MR	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X39	eb	XC9110D391MR	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X3A	-	XC6118N33AMR-G	Vdet-IC	3.3V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
X3B	-	XC6118N33BMR-G	Vdet-IC	3.3V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
X3C	-	XC6118N33CMR-G	Vdet-IC	3.3V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
X3D	-	XC6118N33DMR-G	Vdet-IC	3.3V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
X4	-	BD46382G	Vdet-IC	3.8V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
X4	-	R1210N242C	DC-DC-IC	PWM step-up, 2.4V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
X40	-	R1172N181A5	LVR-IC	LDO, 1.85V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X40	eb	XC9110D401MR	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X41	-	R1172N281A5	LVR-IC	LDO, 2.85V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X41	eb	XC9110D411MR	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X42	eb	XC9110D421MR	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X43	eb	XC9110D431MR	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X44	eb	XC9110D441MR	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X45	eb	XC9110D451MR	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X46	eb	XC9110D461MR	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X47	eb	XC9110D471MR	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X48	-	R1172N081A	LVR-IC	LDO, 0.8V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X48	eb	XC9110D481MR	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X49	-	R1172N091A	LVR-IC	LDO, 0.9V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X49	eb	XC9110D491MR	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X4A	-	XC6118N34AMR-G	Vdet-IC	3.4V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
X4B	-	XC6118N34BMR-G	Vdet-IC	3.4V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
X4C	-	XC6118N34CMR-G	Vdet-IC	3.4V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
X4D	-	XC6118N34DMR-G	Vdet-IC	3.4V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
X5	-	BD46372G	Vdet-IC	3.7V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
X5	-	R1210N252C	DC-DC-IC	PWM step-up, 2.5V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
X50	-	R1172N101A	LVR-IC	LDO, 1.0V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X50	eb	XC9110D501MR	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X51	-	R1172N111A	LVR-IC	LDO, 1.1V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X51	eb	XC9110D511MR	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X52	-	R1172N121A	LVR-IC	LDO, 1.2V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X52	eb	XC9110D521MR	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X53	-	R1172N131A	LVR-IC	LDO, 1.3V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X53	eb	XC9110D531MR	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X54	-	R1172N141A	LVR-IC	LDO, 1.4V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X54	eb	XC9110D541MR	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X55	-	R1172N151A	LVR-IC	LDO, 1.5V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X55	eb	XC9110D551MR	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X56	-	R1172N161A	LVR-IC	LDO, 1.6V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X56	eb	XC9110D561MR	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X57	-	R1172N171A	LVR-IC	LDO, 1.7V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X57	eb	XC9110D571MR	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X58	-	R1172N181A	LVR-IC	LDO, 1.8V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X58	eb	XC9110D581MR	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X59	-	R1172N191A	LVR-IC	LDO, 1.9V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X59	eb	XC9110D591MR	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X5A	-	XC6118N35AMR-G	Vdet-IC	3.5V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
X5B	-	XC6118N35BMR-G	Vdet-IC	3.5V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
X5C	-	XC6118N35CMR-G	Vdet-IC	3.5V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
X5D	-	XC6118N35DMR-G	Vdet-IC	3.5V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
X6	-	BD46362G	Vdet-IC	3.6V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
X6	-	R1210N262C	DC-DC-IC	PWM step-up, 2.6V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
X60	-	R1172N201A	LVR-IC	LDO, 2.0V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X60	eb	XC9110D601MR	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X61	-	R1172N211A	LVR-IC	LDO, 2.1V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X61	eb	XC9110D611MR	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X62	-	R1172N221A	LVR-IC	LDO, 2.2V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X62	eb	XC9110D621MR	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X63	-	R1172N231A	LVR-IC	LDO, 2.3V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X63	eb	XC9110D631MR	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X64	-	R1172N241A	LVR-IC	LDO, 2.4V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X64	eb	XC9110D641MR	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X65	-	R1172N251A	LVR-IC	LDO, 2.5V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X65	eb	XC9110D651MR	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X66	-	R1172N261A	LVR-IC	LDO, 2.6V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X66	eb	XC9110D661MR	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X67	-	R1172N271A	LVR-IC	LDO, 2.7V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X67	eb	XC9110D671MR	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X68	-	R1172N281A	LVR-IC	LDO, 2.8V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X68	eb	XC9110D681MR	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X69	-	R1172N291A	LVR-IC	LDO, 2.9V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X69	eb	XC9110D691MR	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X6A	-	XC6118N36AMR-G	Vdet-IC	3.6V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
X6B	-	XC6118N36BMR-G	Vdet-IC	3.6V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
X6C	-	XC6118N36CMR-G	Vdet-IC	3.6V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
X6D	-	XC6118N36DMR-G	Vdet-IC	3.6V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
X7	-	BD46352G	Vdet-IC	3.5V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
X7	-	R1210N272C	DC-DC-IC	PWM step-up, 2.7V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
X70	-	R1172N301A	LVR-IC	LDO, 3.0V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X70	eb	XC9110D701MR	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA, +CE	SOT-25	28sd	DC6	6g	Tor
X71	-	R1172N311A	LVR-IC	LDO, 3.1V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X72	-	R1172N321A	LVR-IC	LDO, 3.2V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X73	-	R1172N331A	LVR-IC	LDO, 3.3V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X74	-	R1172N341A	LVR-IC	LDO, 3.4V±2%, 1A, -CE, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X75	-	R1172N351A	LVR-IC	LDO, 3.5V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X76	-	R1172N361A	LVR-IC	LDO, 3.6V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X77	-	R1172N371A	LVR-IC	LDO, 3.7V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X78	-	R1172N381A	LVR-IC	LDO, 3.8V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X79	-	R1172N391A	LVR-IC	LDO, 3.9V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X7A	-	XC6118N37AMR-G	Vdet-IC	3.7V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
X7B	-	XC6118N37BMR-G	Vdet-IC	3.7V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
X7C	-	XC6118N37CMR-G	Vdet-IC	3.7V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
X7D	-	XC6118N37DMR-G	Vdet-IC	3.7V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
X8	-	BD46342G	Vdet-IC	3.4V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
X8	-	R1210N282C	DC-DC-IC	PWM step-up, 2.8V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
X8-	-	RT9193-24PB	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
X80	-	R1172N401A	LVR-IC	LDO, 4.0V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X81	-	R1172N411A	LVR-IC	LDO, 4.1V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X82	-	R1172N421A	LVR-IC	LDO, 4.2V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X83	-	R1172N431A	LVR-IC	LDO, 4.3V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X84	-	R1172N441A	LVR-IC	LDO, 4.4V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X85	-	R1172N451A	LVR-IC	LDO, 4.5V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X86	-	R1172N461A	LVR-IC	LDO, 4.6V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X87	-	R1172N471A	LVR-IC	LDO, 4.7V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X88	-	R1172N481A	LVR-IC	LDO, 4.8V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X89	-	R1172N491A	LVR-IC	LDO, 4.9V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X8A	-	XC6118N38AMR-G	Vdet-IC	3.8V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
X8B	-	XC6118N38BMR-G	Vdet-IC	3.8V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
X8C	-	XC6118N38CMR-G	Vdet-IC	3.8V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
X8D	-	XC6118N38DMR-G	Vdet-IC	3.8V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
X9	-	BD46332G	Vdet-IC	3.3V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
X9	-	R1210N292C	DC-DC-IC	PWM step-up, 2.9V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
X9-	-	RT9169-16PB	LVR-IC	LDO, 1.6V±2%, 100mA, -CE	SOT-23-5	28cx	VR4	6g	Rct
X90	-	R1172N501A	LVR-IC	LDO, 5.0V±2%, 1A, -CE	SOT-23-5	28vrd	VR4	6g	Ric
X9A	-	XC6118N39AMR-G	Vdet-IC	3.9V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
X9B	-	XC6118N39BMR-G	Vdet-IC	3.9V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
X9C	-	XC6118N39CMR-G	Vdet-IC	3.9V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
X9D	-	XC6118N39DMR-G	Vdet-IC	3.9V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
XA	-	BD46322G	Vdet-IC	3.2V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
XA	-	R1210N302C	DC-DC-IC	PWM step-up, 3V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XA	-	RN1501	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=4k7/4k7	SMV	30/TD6	TD6	6a	Tos
XA	-	RN1701	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=4k7/4k7	SOT-353	28	TD6	6a	Tos
XA	-	RN1701JE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=4k7/4k7	ESV	30/TD6	TD6	6a	Tos
XA	-	RN5RK271B	DC-DC-IC	VFM step-up, Vout=2.7V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
XA0	-	LN6219A312MR	LVR-IC	LDO, 3.1V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XA1	-	LN6219A322MR	LVR-IC	LDO, 3.2V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XA2	-	LN6219A332MR	LVR-IC	LDO, 3.3V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XA3	-	LN6219A342MR	LVR-IC	LDO, 3.4V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XA4	-	LN6219A352MR	LVR-IC	LDO, 3.5V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XA5	-	LN6219A362MR	LVR-IC	LDO, 3.6V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XA6	-	LN6219A372MR	LVR-IC	LDO, 3.7V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XA7	-	LN6219A382MR	LVR-IC	LDO, 3.8V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XA8	-	LN6219A392MR	LVR-IC	LDO, 3.9V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XA9	-	LN6219A402MR	LVR-IC	LDO, 4.0V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XAA	-	LN6219A412MR	LVR-IC	LDO, 4.1V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XAA	-	R3117N313A	Vdet-IC	3.1V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAB	-	LN6219A422MR	LVR-IC	LDO, 4.2V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XAB	-	R3117N323A	Vdet-IC	3.2V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAC	-	LN6219A432MR	LVR-IC	LDO, 4.3V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XAC	-	R3117N333A	Vdet-IC	3.3V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAD	-	LN6219A442MR	LVR-IC	LDO, 4.4V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XAD	-	R3117N343A	Vdet-IC	3.4V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAE	-	LN6219A452MR	LVR-IC	LDO, 4.5V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XAE	-	R3117N353A	Vdet-IC	3.5V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAF	-	LN6219A462MR	LVR-IC	LDO, 4.6V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XAF	-	R3117N363A	Vdet-IC	3.6V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAG	-	R3117N373A	Vdet-IC	3.7V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAH	-	LN6219A472MR	LVR-IC	LDO, 4.7V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XAH	-	R3117N383A	Vdet-IC	3.8V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAJ	-	R3117N393A	Vdet-IC	3.9V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAK	-	LN6219A482MR	LVR-IC	LDO, 4.8V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XAK	-	R3117N403A	Vdet-IC	4.0V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAL	-	LN6219A492MR	LVR-IC	LDO, 4.9V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XAL	-	R3117N413A	Vdet-IC	4.1V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAM	-	LN6219A502MR	LVR-IC	LDO, 5.0V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XAM	-	R3117N423A	Vdet-IC	4.2V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAN	-	R3117N433A	Vdet-IC	4.3V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAP	-	R3117N443A	Vdet-IC	4.4V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAQ	-	R3117N453A	Vdet-IC	4.5V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAR	-	R3117N463A	Vdet-IC	4.6V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAS	-	R3117N473A	Vdet-IC	4.7V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAT	-	R3117N483A	Vdet-IC	4.8V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAU	-	R3117N493A	Vdet-IC	4.9V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric
XAV	-	R3117N503A	Vdet-IC	5.0V±1%, -Reset ODO, Sense	SOT-23-5	28rr	VD11	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XB	-	4A002MH5	CMOS-Log	2-input NOR gate	MCPH5	28	Log2	6a	San
XB	-	BD46312G	Vdet-IC	3.1V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
XB	-	R1210N312C	DC-DC-IC	PWM step-up, 3.1V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XB	-	RN1502	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=20k/10k	SMV	30/TD6	TD6	6a	Tos
XB	-	RN1702	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=20k/10k	SOT-353	28	TD6	6a	Tos
XB	-	RN1702JE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=20k/10k	ESV	30/TD6	TD6	6a	Tos
XB	-	RN5RK201B	DC-DC-IC	VFM step-up, Vout=2.0V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
XB-	-	RT9013-18PB	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
XB0	-	LN6219B312MR	LVR-IC	LDO, 3.1V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XB1	-	LN6219B322MR	LVR-IC	LDO, 3.2V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XB2	-	LN6219B332MR	LVR-IC	LDO, 3.3V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XB3	-	LN6219B342MR	LVR-IC	LDO, 3.4V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XB4	-	LN6219B352MR	LVR-IC	LDO, 3.5V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XB5	-	LN6219B362MR	LVR-IC	LDO, 3.6V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XB6	-	LN6219B372MR	LVR-IC	LDO, 3.7V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XB7	-	LN6219B382MR	LVR-IC	LDO, 3.8V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XB8	-	LN6219B392MR	LVR-IC	LDO, 3.9V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XB9	-	LN6219B402MR	LVR-IC	LDO, 4.0V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XBA	-	LN6219B412MR	LVR-IC	LDO, 4.1V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XBA	-	R3117N313C	Vdet-IC	3.1V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBB	-	LN6219B422MR	LVR-IC	LDO, 4.2V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XBB	-	R3117N323C	Vdet-IC	3.2V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBC	-	LN6219B432MR	LVR-IC	LDO, 4.3V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XBC	-	R3117N333C	Vdet-IC	3.3V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBD	-	LN6219B442MR	LVR-IC	LDO, 4.4V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XBD	-	R3117N343C	Vdet-IC	3.4V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBE	-	LN6219B452MR	LVR-IC	LDO, 4.5V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XBE	-	R3117N353C	Vdet-IC	3.5V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBF	-	LN6219B462MR	LVR-IC	LDO, 4.6V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XBF	-	R3117N363C	Vdet-IC	3.6V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBG	-	R3117N373C	Vdet-IC	3.7V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBH	-	LN6219B472MR	LVR-IC	LDO, 4.7V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XBH	-	R3117N383C	Vdet-IC	3.8V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBJ	-	R3117N393C	Vdet-IC	3.9V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBK	-	LN6219B482MR	LVR-IC	LDO, 4.8V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XBK	-	R3117N403C	Vdet-IC	4.0V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBL	-	LN6219B492MR	LVR-IC	LDO, 4.9V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XBL	-	R3117N413C	Vdet-IC	4.1V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBM	-	LN6219B502MR	LVR-IC	LDO, 5.0V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XBM	-	R3117N423C	Vdet-IC	4.2V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBN	-	R3117N433C	Vdet-IC	4.3V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBP	-	R3117N443C	Vdet-IC	4.4V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBQ	-	R3117N453C	Vdet-IC	4.5V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBR	-	R3117N463C	Vdet-IC	4.6V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBS	-	R3117N473C	Vdet-IC	4.7V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBT	-	R3117N483C	Vdet-IC	4.8V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBU	-	R3117N493C	Vdet-IC	4.9V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XBV	-	R3117N503C	Vdet-IC	5.0V±1%, -Reset PPO, Sense	SOT-23-5	28rr	VD12	6g	Ric
XC	-	4A004MH5	CMOS-Log	Inverter	MCPH5	28	Log6	6a	San
XC	-	BD46302G	Vdet-IC	3.0V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
XC	-	R1210N322C	DC-DC-IC	PWM step-up, 3.2V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XC	-	RN1503	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=22k/22k	SMV	30/TD6	TD6	6a	Tos
XC	-	RN1703	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=22k/22k	SOT-353	28	TD6	6a	Tos
XC	-	RN1703JE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=22k/22k	ESV	30/TD6	TD6	6a	Tos
XC	-	RN5RK221B	DC-DC-IC	VFM step-up, Vout=2.2V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
XC-	-	RT9013-1HPB	LVR-IC	LDO, 1.85V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
XC0	-	LN6219C312MR	LVR-IC	LDO, 3.1V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XC1	-	LN6219C322MR	LVR-IC	LDO, 3.2V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XC2	-	LN6219C332MR	LVR-IC	LDO, 3.3V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XC3	-	LN6219C342MR	LVR-IC	LDO, 3.4V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XC4	-	LN6219C352MR	LVR-IC	LDO, 3.5V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XC5	-	LN6219C362MR	LVR-IC	LDO, 3.6V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XC6	-	LN6219C372MR	LVR-IC	LDO, 3.7V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XC7	-	LN6219C382MR	LVR-IC	LDO, 3.8V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XC8	-	LN6219C392MR	LVR-IC	LDO, 3.9V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XC9	-	LN6219C402MR	LVR-IC	LDO, 4.0V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XCA	-	LN6219C412MR	LVR-IC	LDO, 4.1V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XCAT	-	YB1210ST25R120	LVR-IC	LDO, ULN, 1.2V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCB	-	LN6219C422MR	LVR-IC	LDO, 4.2V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XCBT	-	YB1210ST25R130	LVR-IC	LDO, ULN, 1.3V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XCC	-	LN6219C432MR	LVR-IC	LDO, 4.3V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XCCT	-	YB1210ST25R140	LVR-IC	LDO, ULN, 1.4V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCD	-	LN6219C442MR	LVR-IC	LDO, 4.4V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XCDT	-	YB1210ST25R150	LVR-IC	LDO, ULN, 1.5V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCE	-	LN6219C452MR	LVR-IC	LDO, 4.5V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XCET	-	YB1210ST25R160	LVR-IC	LDO, ULN, 1.6V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCF	-	LN6219C462MR	LVR-IC	LDO, 4.6V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XCFT	-	YB1210ST25R170	LVR-IC	LDO, ULN, 1.7V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCGT	-	YB1210ST25R180	LVR-IC	LDO, ULN, 1.8V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCH	-	LN6219C472MR	LVR-IC	LDO, 4.7V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XCHT	-	YB1210ST25R190	LVR-IC	LDO, ULN, 1.9V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCIT	-	YB1210ST25R200	LVR-IC	LDO, ULN, 2.0V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCJT	-	YB1210ST25R210	LVR-IC	LDO, ULN, 2.1V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCK	-	LN6219C482MR	LVR-IC	LDO, 4.8V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XCKT	-	YB1210ST25R220	LVR-IC	LDO, ULN, 2.2V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCL	-	LN6219C492MR	LVR-IC	LDO, 4.9V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XCLT	-	YB1210ST25R230	LVR-IC	LDO, ULN, 2.3V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCM	-	LN6219C502MR	LVR-IC	LDO, 5.0V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XCMT	-	YB1210ST25R240	LVR-IC	LDO, ULN, 2.4V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCNT	-	YB1210ST25R250	LVR-IC	LDO, ULN, 2.5V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCOT	-	YB1210ST25R260	LVR-IC	LDO, ULN, 2.6V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCPT	-	YB1210ST25R270	LVR-IC	LDO, ULN, 2.7V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCQT	-	YB1210ST25R280	LVR-IC	LDO, ULN, 2.8V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCRT	-	YB1210ST25R290	LVR-IC	LDO, ULN, 2.9V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCST	-	YB1210ST25R300	LVR-IC	LDO, ULN, 3.0V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCTT	-	YB1210ST25R310	LVR-IC	LDO, ULN, 3.1V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCUT	-	YB1210ST25R320	LVR-IC	LDO, ULN, 3.2V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCVT	-	YB1210ST25R330	LVR-IC	LDO, ULN, 3.3V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCWT	-	YB1210ST25R340	LVR-IC	LDO, ULN, 3.4V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCXT	-	YB1210ST25R350	LVR-IC	LDO, ULN, 3.5V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XCYT	-	YB1210ST25R360	LVR-IC	LDO, ULN, 3.6V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XD	-	4A000MH5	CMOS-Log	2-input NAND gate	MCPH5	28	Log1	6a	San
XD	-	BD46292G	Vdet-IC	2.9V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
XD	-	R1210N332C	DC-DC-IC	PWM step-up, 3.3V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XD	-	RN1504	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=47k/47k	SMV	30/TD6	TD6	6a	Tos
XD	-	RN1704	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=47k/47k	SOT-353	28	TD6	6a	Tos
XD	-	RN1704JE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=47k/47k	ESV	30/TD6	TD6	6a	Tos
XD	-	RN5RK251B	DC-DC-IC	VFM step-up, Vout=2.5V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
XD-	-	RT9013-28PB	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
XD0	-	LN6219D312MR	LVR-IC	LDO, 3.1V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XD1	-	LN6219D322MR	LVR-IC	LDO, 3.2V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XD2	-	LN6219D332MR	LVR-IC	LDO, 3.3V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XD3	-	LN6219D342MR	LVR-IC	LDO, 3.4V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XD4	-	LN6219D352MR	LVR-IC	LDO, 3.5V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XD5	-	LN6219D362MR	LVR-IC	LDO, 3.6V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XD6	-	LN6219D372MR	LVR-IC	LDO, 3.7V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XD7	-	LN6219D382MR	LVR-IC	LDO, 3.8V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XD8	-	LN6219D392MR	LVR-IC	LDO, 3.9V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XD9	-	LN6219D402MR	LVR-IC	LDO, 4.0V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XDA	-	LN6219D412MR	LVR-IC	LDO, 4.1V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XDB	-	LN6219D422MR	LVR-IC	LDO, 4.2V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XDC	-	LN6219D432MR	LVR-IC	LDO, 4.3V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XDD	-	LN6219D442MR	LVR-IC	LDO, 4.4V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XDE	-	LN6219D452MR	LVR-IC	LDO, 4.5V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XDF	-	LN6219D462MR	LVR-IC	LDO, 4.6V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XDH	-	LN6219D472MR	LVR-IC	LDO, 4.7V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XDK	-	LN6219D482MR	LVR-IC	LDO, 4.8V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XDL	-	LN6219D492MR	LVR-IC	LDO, 4.9V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XDM	-	LN6219D502MR	LVR-IC	LDO, 5.0V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XE	-	4A032MH5	CMOS-Log	2-input OR gate	MCPH5	28	Log4	6a	San
XE	-	BD46282G	Vdet-IC	2.8V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
XE	-	R1210N342C	DC-DC-IC	PWM step-up, 3.4V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XE	-	RN1505	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=2k2/47k	SMV	30/TD6	TD6	6a	Tos
XE	-	RN1705	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=2k2/47k	SOT-353	28	TD6	6a	Tos
XE	-	RN1705JE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=2k2/47k	ESV	30/TD6	TD6	6a	Tos
XE	-	RN5RK301B	DC-DC-IC	VFM step-up, Vout=3.0V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
XE-	-	RT9013-2HPB	LVR-IC	LDO, 2.85V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
XE8	-	LN6219A09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XE9	-	LN6219A10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XEA	-	LN6219A11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XEAT	-	YB1230ST25X180	LVR-IC	LDO, 1.8V±2%, 600mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XEB	-	LN6219A12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XEBT	-	YB1230ST25X190	LVR-IC	LDO, 1.9V±2%, 600mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XEC	-	LN6219A13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XECT	-	YB1230ST25X200	LVR-IC	LDO, 2.0V±2%, 600mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XED	-	LN6219A14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XEDT	-	YB1230ST25X210	LVR-IC	LDO, 2.1V±2%, 600mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XEE	-	LN6219A15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XEET	-	YB1230ST25X220	LVR-IC	LDO, 2.2V±2%, 600mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XEF	-	LN6219A16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XEFT	-	YB1230ST25X230	LVR-IC	LDO, 2.3V±2%, 600mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XEGT	-	YB1230ST25X240	LVR-IC	LDO, 2.4V±2%, 600mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XEH	-	LN6219A17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XEHT	-	YB1230ST25X250	LVR-IC	LDO, 2.5V±2%, 600mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XEIT	-	YB1230ST25X260	LVR-IC	LDO, 2.6V±2%, 600mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XEJT	-	YB1230ST25X270	LVR-IC	LDO, 2.7V±2%, 600mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XEK	-	LN6219A18AMR	LVR-IC	LDO, 1.85V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XEKT	-	YB1230ST25X280	LVR-IC	LDO, 2.8V±2%, 600mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XEL	-	LN6219A19AMR	LVR-IC	LDO, 1.95V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XELT	-	YB1230ST25X290	LVR-IC	LDO, 2.9V±2%, 600mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XEM	-	LN6219A20AMR	LVR-IC	LDO, 2.05V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XEMT	-	YB1230ST25X300	LVR-IC	LDO, 3.0V±2%, 600mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XEN	-	LN6219A21AMR	LVR-IC	LDO, 2.15V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XENT	-	YB1230ST25X310	LVR-IC	LDO, 3.1V±2%, 600mA, +CE	SOT-25	28cx	VR7	6a	Ybn
XEP	-	LN6219A22AMR	LVR-IC	LDO, 2.25V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XER	-	LN6219A23AMR	LVR-IC	LDO, 2.35V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XES	-	LN6219A24AMR	LVR-IC	LDO, 2.45V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XET	-	LN6219A25AMR	LVR-IC	LDO, 2.55V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XEU	-	LN6219A26AMR	LVR-IC	LDO, 2.65V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XEV	-	LN6219A27AMR	LVR-IC	LDO, 2.75V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XEX	-	LN6219A28AMR	LVR-IC	LDO, 2.85V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XEY	-	LN6219A29AMR	LVR-IC	LDO, 2.95V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XEZ	-	LN6219A30AMR	LVR-IC	LDO, 3.05V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XF	-	4A034MH5	CMOS-Log	Noninverting buffer	MCPH5	28	Log10	6a	San
XF	-	BD46272G	Vdet-IC	2.7V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
XF	-	R1210N352C	DC-DC-IC	PWM step-up, 3.5V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XF	-	RN1506	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=4k7/47k	SMV	30/TD6	TD6	6a	Tos
XF	-	RN1706	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=4k7/47k	SOT-353	28	TD6	6a	Tos
XF	-	RN1706JE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=4k7/47k	ESV	30/TD6	TD6	6a	Tos
XF	-	RN5RK331B	DC-DC-IC	VFM step-up, Vout=3.3V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
XF-	-	RT9818C-25PB	Vdet-IC	2.5V±1.5%, -Reset ODO, Td=220ms	SOT-23-5	28vdm	VD6	6a	Rct
XF=	-	RT9818C-25GB	Vdet-IC	2.5V±1.5%, -Reset ODO, Td=220ms	SOT-23-5	28vdm	VD6	6a	Rct
XF8	-	LN6219B09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XF9	-	LN6219B10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFA	-	LN6219B11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFB	-	LN6219B12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFC	-	LN6219B13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFD	-	LN6219B14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFE	-	LN6219B15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFF	-	LN6219B16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFH	-	LN6219B17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFK	-	LN6219B18AMR	LVR-IC	LDO, 1.85V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFL	-	LN6219B19AMR	LVR-IC	LDO, 1.95V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFM	-	LN6219B20AMR	LVR-IC	LDO, 2.05V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFN	-	LN6219B21AMR	LVR-IC	LDO, 2.15V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFP	-	LN6219B22AMR	LVR-IC	LDO, 2.25V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFR	-	LN6219B23AMR	LVR-IC	LDO, 2.35V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFS	-	LN6219B24AMR	LVR-IC	LDO, 2.45V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFT	-	LN6219B25AMR	LVR-IC	LDO, 2.55V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFU	-	LN6219B26AMR	LVR-IC	LDO, 2.65V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFV	-	LN6219B27AMR	LVR-IC	LDO, 2.75V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFX	-	LN6219B28AMR	LVR-IC	LDO, 2.85V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFY	-	LN6219B29AMR	LVR-IC	LDO, 2.95V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XFZ	-	LN6219B30AMR	LVR-IC	LDO, 3.05V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XG	-	4AM01MH5	CMOS-Log	Inverter with high side switch (ODO)	MCPH5	28	Log19	6a	San
XG	-	BD46262G	Vdet-IC	2.6V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
XG	-	R1210N362C	DC-DC-IC	PWM step-up, 3.6V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XG	-	RN5RK361B	DC-DC-IC	VFM step-up, Vout=3.6V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
XG-	-	RT9818C-28PB	Vdet-IC	2.8V±1.5%, -Reset ODO, Td=220ms	SOT-23-5	28vdm	VD6	6a	Rct
XH	-	4AM02MH5	CMOS-Log	Noninverting buffer with high side switch (ODO)	MCPH5	28	Log8	6a	San



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XH	-	BD46252G	Vdet-IC	2.5V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
XH	-	R1210N372C	DC-DC-IC	PWM step-up, 3.7V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XH	-	RN1507	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=10k/47k	SMV	30/TD6	TD6	6a	Tos
XH	-	RN1707	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=10k/47k	SOT-353	28	TD6	6a	Tos
XH	-	RN1707JE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=10k/47k	ESV	30/TD6	TD6	6a	Tos
XH	-	RN5RK501B	DC-DC-IC	VFM step-up, Vout=5.0V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
XH-	-	RT9013-27PB	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
XH8	-	LN6219C09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XH9	-	LN6219C10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHA	-	LN6219C11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHB	-	LN6219C12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHC	-	LN6219C13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHD	-	LN6219C14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHE	-	LN6219C15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHF	-	LN6219C16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHH	-	LN6219C17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHK	-	LN6219C18AMR	LVR-IC	LDO, 1.85V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHL	-	LN6219C19AMR	LVR-IC	LDO, 1.95V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHM	-	LN6219C20AMR	LVR-IC	LDO, 2.05V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHN	-	LN6219C21AMR	LVR-IC	LDO, 2.15V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHP	-	LN6219C22AMR	LVR-IC	LDO, 2.25V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHR	-	LN6219C23AMR	LVR-IC	LDO, 2.35V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHS	-	LN6219C24AMR	LVR-IC	LDO, 2.45V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHT	-	LN6219C25AMR	LVR-IC	LDO, 2.55V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHU	-	LN6219C26AMR	LVR-IC	LDO, 2.65V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHV	-	LN6219C27AMR	LVR-IC	LDO, 2.75V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHX	-	LN6219C28AMR	LVR-IC	LDO, 2.85V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHY	-	LN6219C29AMR	LVR-IC	LDO, 2.95V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XHZ	-	LN6219C30AMR	LVR-IC	LDO, 3.05V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XI	-	RN1508	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=22k/47k	SMV	30/TD6	TD6	6a	Tos
XI	-	RN1708	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=22k/47k	SOT-353	28	TD6	6a	Tos
XI	-	RN1708JE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=22k/47k	ESV	30/TD6	TD6	6a	Tos
XJ	-	4AM03MH5	CMOS-Log	Noninverting buffer (ODO)	MCPH5	28	Log8	6a	San
XJ	-	BD46242G	Vdet-IC	2.4V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
XJ	-	R1210N382C	DC-DC-IC	PWM step-up, 3.8V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XJ	-	RN1509	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=47k/22k	SMV	30/TD6	TD6	6a	Tos
XJ	-	RN1709	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=47k/22k	SOT-353	28	TD6	6a	Tos
XJ	-	RN1709JE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=47k/22k	ESV	30/TD6	TD6	6a	Tos
XJ	-	RN5RK551B	DC-DC-IC	VFM step-up, Vout=5.5V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
XJ-	-	RT9013-20PB	LVR-IC	LDO, 2.0V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
XJCT	-	YB1231ST25X320	LVR-IC	LDO, 3.2V±2%, 600mA, +CE	SOT-25	28cx	VR4	6a	Ybn
XJDT	-	YB1231ST25X330	LVR-IC	LDO, 3.3V±2%, 600mA, +CE	SOT-25	28cx	VR4	6a	Ybn
XJET	-	YB1231ST25X340	LVR-IC	LDO, 3.4V±2%, 600mA, +CE	SOT-25	28cx	VR4	6a	Ybn
XJFT	-	YB1231ST25X350	LVR-IC	LDO, 3.5V±2%, 600mA, +CE	SOT-25	28cx	VR4	6a	Ybn
XJGT	-	YB1231ST25X360	LVR-IC	LDO, 3.6V±2%, 600mA, +CE	SOT-25	28cx	VR4	6a	Ybn
XJHT	-	YB1231ST25X370	LVR-IC	LDO, 3.7V±2%, 600mA, +CE	SOT-25	28cx	VR4	6a	Ybn
XJIT	-	YB1231ST25X380	LVR-IC	LDO, 3.8V±2%, 600mA, +CE	SOT-25	28cx	VR4	6a	Ybn
XJJT	-	YB1231ST25X390	LVR-IC	LDO, 3.9V±2%, 600mA, +CE	SOT-25	28cx	VR4	6a	Ybn
XJKT	-	YB1231ST25X400	LVR-IC	LDO, 4.0V±2%, 600mA, +CE	SOT-25	28cx	VR4	6a	Ybn
XJLT	-	YB1231ST25X410	LVR-IC	LDO, 4.1V±2%, 600mA, +CE	SOT-25	28cx	VR4	6a	Ybn
XJMT	-	YB1231ST25X420	LVR-IC	LDO, 4.2V±2%, 600mA, +CE	SOT-25	28cx	VR4	6a	Ybn
XJNT	-	YB1231ST25X430	LVR-IC	LDO, 4.3V±2%, 600mA, +CE	SOT-25	28cx	VR4	6a	Ybn
XJOT	-	YB1231ST25X440	LVR-IC	LDO, 4.4V±2%, 600mA, +CE	SOT-25	28cx	VR4	6a	Ybn
XJPT	-	YB1231ST25X450	LVR-IC	LDO, 4.5V±2%, 600mA, +CE	SOT-25	28cx	VR4	6a	Ybn
XK	-	4AM04MH5	CMOS-Log	Inverter (ODO)	MCPH5	28	Log19	6a	San
XK	-	BD46232G	Vdet-IC	2.3V±1%, -MR, -Reset PPO, 200ms	SSOP-5	28vdp	VD5	6c	Rhm
XK	-	R1210N392C	DC-DC-IC	PWM step-up, 3.9V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XK	-	RN1510	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1=4k7	SMV	30/TD6	TD6	6a	Tos
XK	-	RN1710	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1=4k7	SOT-353	28	TD6	6a	Tos
XK	-	RN1710JE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1=4k7	ESV	30/TD6	TD6	6a	Tos
XK	-	RN5RK391B	DC-DC-IC	VFM step-up, Vout=3.9V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
XK8	-	LN6219D09AMR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XK9	-	LN6219D10AMR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKA	-	LN6219D11AMR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKB	-	LN6219D12AMR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKC	-	LN6219D13AMR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKD	-	LN6219D14AMR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKE	-	LN6219D15AMR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKF	-	LN6219D16AMR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKH	-	LN6219D17AMR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XKK	-	LN6219D18AMR	LVR-IC	LDO, 1.85V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKL	-	LN6219D19AMR	LVR-IC	LDO, 1.95V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKM	-	LN6219D20AMR	LVR-IC	LDO, 2.05V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKN	-	LN6219D21AMR	LVR-IC	LDO, 2.15V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKP	-	LN6219D22AMR	LVR-IC	LDO, 2.25V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKR	-	LN6219D23AMR	LVR-IC	LDO, 2.35V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKS	-	LN6219D24AMR	LVR-IC	LDO, 2.45V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKT	-	LN6219D25AMR	LVR-IC	LDO, 2.55V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKU	-	LN6219D26AMR	LVR-IC	LDO, 2.65V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKV	-	LN6219D27AMR	LVR-IC	LDO, 2.75V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKX	-	LN6219D28AMR	LVR-IC	LDO, 2.85V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKY	-	LN6219D29AMR	LVR-IC	LDO, 2.95V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XKZ	-	LN6219D30AMR	LVR-IC	LDO, 3.05V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XL	-	R1210N402C	DC-DC-IC	PWM step-up, 4V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XL	-	RN5RK421B	DC-DC-IC	VFM step-up, Vout=4.2V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
XL0	-	LN6219A31AMR	LVR-IC	LDO, 3.15V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XL1	-	LN6219A32AMR	LVR-IC	LDO, 3.25V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XL2	-	LN6219A33AMR	LVR-IC	LDO, 3.35V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XL3	-	LN6219A34AMR	LVR-IC	LDO, 3.45V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XL4	-	LN6219A35AMR	LVR-IC	LDO, 3.55V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XL5	-	LN6219A36AMR	LVR-IC	LDO, 3.65V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XL6	-	LN6219A37AMR	LVR-IC	LDO, 3.75V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XL7	-	LN6219A38AMR	LVR-IC	LDO, 3.85V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XL8	-	LN6219A39AMR	LVR-IC	LDO, 3.95V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XL9	-	LN6219A40AMR	LVR-IC	LDO, 4.05V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XLA	-	LN6219A41AMR	LVR-IC	LDO, 4.15V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XLB	-	LN6219A42AMR	LVR-IC	LDO, 4.25V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XLC	-	LN6219A43AMR	LVR-IC	LDO, 4.35V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XLD	-	LN6219A44AMR	LVR-IC	LDO, 4.45V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XLE	-	LN6219A45AMR	LVR-IC	LDO, 4.55V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XLF	-	LN6219A46AMR	LVR-IC	LDO, 4.65V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XLH	-	LN6219A47AMR	LVR-IC	LDO, 4.75V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XLK	-	LN6219A48AMR	LVR-IC	LDO, 4.85V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XLL	-	LN6219A49AMR	LVR-IC	LDO, 4.95V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XM	-	R1210N412C	DC-DC-IC	PWM step-up, 4.1V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XM	-	RN1511	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1=10k	SMV	30/TD6	TD6	6a	Tos
XM	-	RN1711	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1=10k	SOT-353	28	TD6	6a	Tos
XM	-	RN1711JE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1=10k	ESV	30/TD6	TD6	6a	Tos
XM	-	RN5RK351B	DC-DC-IC	VFM step-up, Vout=3.5V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
XM0	-	LN6219B31AMR	LVR-IC	LDO, 3.15V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XM1	-	LN6219B32AMR	LVR-IC	LDO, 3.25V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XM2	-	LN6219B33AMR	LVR-IC	LDO, 3.35V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XM3	-	LN6219B34AMR	LVR-IC	LDO, 3.45V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XM4	-	LN6219B35AMR	LVR-IC	LDO, 3.55V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XM5	-	LN6219B36AMR	LVR-IC	LDO, 3.65V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XM6	-	LN6219B37AMR	LVR-IC	LDO, 3.75V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XM7	-	LN6219B38AMR	LVR-IC	LDO, 3.85V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XM8	-	LN6219B39AMR	LVR-IC	LDO, 3.95V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XM9	-	LN6219B40AMR	LVR-IC	LDO, 4.05V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XMA	-	LN6219B41AMR	LVR-IC	LDO, 4.15V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XMB	-	LN6219B42AMR	LVR-IC	LDO, 4.25V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XMC	-	LN6219B43AMR	LVR-IC	LDO, 4.35V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XMD	-	LN6219B44AMR	LVR-IC	LDO, 4.45V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XME	-	LN6219B45AMR	LVR-IC	LDO, 4.55V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XMF	-	LN6219B46AMR	LVR-IC	LDO, 4.65V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XMH	-	LN6219B47AMR	LVR-IC	LDO, 4.75V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XMK	-	LN6219B48AMR	LVR-IC	LDO, 4.85V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XML	-	LN6219B49AMR	LVR-IC	LDO, 4.95V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XN	-	R1210N422C	DC-DC-IC	PWM step-up, 4.2V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XN	-	RN5RK451B	DC-DC-IC	VFM step-up, Vout=4.5V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
XN0	-	LN6219C31AMR	LVR-IC	LDO, 3.15V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XN1	-	LN6219C32AMR	LVR-IC	LDO, 3.25V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XN2	-	LN6219C33AMR	LVR-IC	LDO, 3.35V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XN3	-	LN6219C34AMR	LVR-IC	LDO, 3.45V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XN4	-	LN6219C35AMR	LVR-IC	LDO, 3.55V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XN5	-	LN6219C36AMR	LVR-IC	LDO, 3.65V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XN6	-	LN6219C37AMR	LVR-IC	LDO, 3.75V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XN7	-	LN6219C38AMR	LVR-IC	LDO, 3.85V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XN8	-	LN6219C39AMR	LVR-IC	LDO, 3.95V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XN9	-	LN6219C40AMR	LVR-IC	LDO, 4.05V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XNA	-	LN6219C41AMR	LVR-IC	LDO, 4.15V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XNB	-	LN6219C42AMR	LVR-IC	LDO, 4.25V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XNC	-	LN6219C43AMR	LVR-IC	LDO, 4.35V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XND	-	LN6219C44AMR	LVR-IC	LDO, 4.45V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XNE	-	LN6219C45AMR	LVR-IC	LDO, 4.55V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XNF	-	LN6219C46AMR	LVR-IC	LDO, 4.65V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XNH	-	LN6219C47AMR	LVR-IC	LDO, 4.75V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XNK	-	LN6219C48AMR	LVR-IC	LDO, 4.85V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XNL	-	LN6219C49AMR	LVR-IC	LDO, 4.95V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XP	-	R1210N432C	DC-DC-IC	PWM step-up, 4.3V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XP	-	RN5RK381B	DC-DC-IC	VFM step-up, Vout=3.8V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
XP0	-	LN6219D31AMR	LVR-IC	LDO, 3.15V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XP1	-	LN6219D32AMR	LVR-IC	LDO, 3.25V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XP2	-	LN6219D33AMR	LVR-IC	LDO, 3.35V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XP3	-	LN6219D34AMR	LVR-IC	LDO, 3.45V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XP4	-	LN6219D35AMR	LVR-IC	LDO, 3.55V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XP5	-	LN6219D36AMR	LVR-IC	LDO, 3.65V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XP6	-	LN6219D37AMR	LVR-IC	LDO, 3.75V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XP7	-	LN6219D38AMR	LVR-IC	LDO, 3.85V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XP8	-	LN6219D39AMR	LVR-IC	LDO, 3.95V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XP9	-	LN6219D40AMR	LVR-IC	LDO, 4.05V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XPA	-	LN6219D41AMR	LVR-IC	LDO, 4.15V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XPB	-	LN6219D42AMR	LVR-IC	LDO, 4.25V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XPC	-	LN6219D43AMR	LVR-IC	LDO, 4.35V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XPD	-	LN6219D44AMR	LVR-IC	LDO, 4.45V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XPE	-	LN6219D45AMR	LVR-IC	LDO, 4.55V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XPF	-	LN6219D46AMR	LVR-IC	LDO, 4.65V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XPH	-	LN6219D47AMR	LVR-IC	LDO, 4.75V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XPK	-	LN6219D48AMR	LVR-IC	LDO, 4.85V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XPL	-	LN6219D49AMR	LVR-IC	LDO, 4.95V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XQ	-	R1210N442C	DC-DC-IC	PWM step-up, 4.4V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XQ	-	RN5RK401B	DC-DC-IC	VFM step-up, Vout=4.0V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
XQ=	-	RT9193-4GGB	LVR-IC	LDO, 4.0V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
XR	-	R1210N452C	DC-DC-IC	PWM step-up, 4.5V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XS	-	4A008MH5	CMOS-Log	2-input AND gate	MCPH5	28	Log3	6a	San
XS	-	R1210N462C	DC-DC-IC	PWM step-up, 4.6V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XT	-	R1210N472C	DC-DC-IC	PWM step-up, 4.7V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XU	-	R1210N482C	DC-DC-IC	PWM step-up, 4.8V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XV	-	R1210N492C	DC-DC-IC	PWM step-up, 4.9V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
XV8	-	LN6219A092MR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XV9	-	LN6219A102MR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVA	-	LN6219A112MR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVB	-	LN6219A122MR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVC	-	LN6219A132MR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVD	-	LN6219A142MR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVE	-	LN6219A152MR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVF	-	LN6219A162MR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVH	-	LN6219A172MR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVK	-	LN6219A182MR	LVR-IC	LDO, 1.8V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVL	-	LN6219A192MR	LVR-IC	LDO, 1.9V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVM	-	LN6219A202MR	LVR-IC	LDO, 2.0V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVN	-	LN6219A212MR	LVR-IC	LDO, 2.1V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVP	-	LN6219A222MR	LVR-IC	LDO, 2.2V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVR	-	LN6219A232MR	LVR-IC	LDO, 2.3V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVS	-	LN6219A242MR	LVR-IC	LDO, 2.4V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVT	-	LN6219A252MR	LVR-IC	LDO, 2.5V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVU	-	LN6219A262MR	LVR-IC	LDO, 2.6V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVV	-	LN6219A272MR	LVR-IC	LDO, 2.7V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVX	-	LN6219A282MR	LVR-IC	LDO, 2.8V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVY	-	LN6219A292MR	LVR-IC	LDO, 2.9V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XVZ	-	LN6219A302MR	LVR-IC	LDO, 3.0V±2%, 240mA, +CE, PDR	SOT-25	28cx	VR4	6g	Inw
XW	-	R1210N601C	DC-DC-IC	PWM step-up, 6V, 100kHz	SOT-23-5	28sc	DC3	6g	Ric
XX8	-	LN6219B092MR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XX9	-	LN6219B102MR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXA	-	LN6219B112MR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXB	-	LN6219B122MR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXC	-	LN6219B132MR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXD	-	LN6219B142MR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXE	-	LN6219B152MR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXF	-	LN6219B162MR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XXH	-	LN6219B172MR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXK	-	LN6219B182MR	LVR-IC	LDO, 1.8V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXL	-	LN6219B192MR	LVR-IC	LDO, 1.9V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXM	-	LN6219B202MR	LVR-IC	LDO, 2.0V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXN	-	LN6219B212MR	LVR-IC	LDO, 2.1V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXP	-	LN6219B222MR	LVR-IC	LDO, 2.2V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXR	-	LN6219B232MR	LVR-IC	LDO, 2.3V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXS	-	LN6219B242MR	LVR-IC	LDO, 2.4V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXT	-	LN6219B252MR	LVR-IC	LDO, 2.5V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXU	-	LN6219B262MR	LVR-IC	LDO, 2.6V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXV	-	LN6219B272MR	LVR-IC	LDO, 2.7V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXX	-	LN6219B282MR	LVR-IC	LDO, 2.8V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXY	-	LN6219B292MR	LVR-IC	LDO, 2.9V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XXZ	-	LN6219B302MR	LVR-IC	LDO, 3.0V±2%, 240mA, +CE	SOT-25	28cx	VR4	6g	Inw
XY8	-	LN6219C092MR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XY9	-	LN6219C102MR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYA	-	LN6219C112MR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYB	-	LN6219C122MR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYC	-	LN6219C132MR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYD	-	LN6219C142MR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYE	-	LN6219C152MR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYF	-	LN6219C162MR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYH	-	LN6219C172MR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYK	-	LN6219C182MR	LVR-IC	LDO, 1.8V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYL	-	LN6219C192MR	LVR-IC	LDO, 1.9V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYM	-	LN6219C202MR	LVR-IC	LDO, 2.0V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYN	-	LN6219C212MR	LVR-IC	LDO, 2.1V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYP	-	LN6219C222MR	LVR-IC	LDO, 2.2V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYR	-	LN6219C232MR	LVR-IC	LDO, 2.3V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYS	-	LN6219C242MR	LVR-IC	LDO, 2.4V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYT	-	LN6219C252MR	LVR-IC	LDO, 2.5V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYU	-	LN6219C262MR	LVR-IC	LDO, 2.6V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYV	-	LN6219C272MR	LVR-IC	LDO, 2.7V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYX	-	LN6219C282MR	LVR-IC	LDO, 2.8V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYY	-	LN6219C292MR	LVR-IC	LDO, 2.9V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XYZ	-	LN6219C302MR	LVR-IC	LDO, 3.0V±2%, 240mA, -CE, PUR	SOT-25	28cx	VR4	6g	Inw
XZ8	-	LN6219D092MR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZ9	-	LN6219D102MR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZA	-	LN6219D112MR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZB	-	LN6219D122MR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZC	-	LN6219D132MR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZD	-	LN6219D142MR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZE	-	LN6219D152MR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZF	-	LN6219D162MR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZH	-	LN6219D172MR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZK	-	LN6219D182MR	LVR-IC	LDO, 1.8V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZL	-	LN6219D192MR	LVR-IC	LDO, 1.9V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZM	-	LN6219D202MR	LVR-IC	LDO, 2.0V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZN	-	LN6219D212MR	LVR-IC	LDO, 2.1V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZP	-	LN6219D222MR	LVR-IC	LDO, 2.2V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZR	-	LN6219D232MR	LVR-IC	LDO, 2.3V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZS	-	LN6219D242MR	LVR-IC	LDO, 2.4V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZT	-	LN6219D252MR	LVR-IC	LDO, 2.5V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZU	-	LN6219D262MR	LVR-IC	LDO, 2.6V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZV	-	LN6219D272MR	LVR-IC	LDO, 2.7V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZX	-	LN6219D282MR	LVR-IC	LDO, 2.8V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZY	-	LN6219D292MR	LVR-IC	LDO, 2.9V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
XZZ	-	LN6219D302MR	LVR-IC	LDO, 3.0V±2%, 240mA, -CE	SOT-25	28cx	VR4	6g	Inw
Y0	-	R1210N502C	DC-DC-IC	PWM step-up, 5V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Y00	-	R1131N181B5	LVR-IC	LDO, 1.85V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y009	-	R3112Q092C	Vdet-IC	0.91V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y01	-	R1131N281B5	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y010	-	R3112Q102C	Vdet-IC	1.0V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y011	-	R3112Q112C	Vdet-IC	1.1V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y012	-	R3112Q122C	Vdet-IC	1.2V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y013	-	R3112Q132C	Vdet-IC	1.3V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y014	-	R3112Q142C	Vdet-IC	1.4V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y015	-	R3112Q152C	Vdet-IC	1.5V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y016	-	R3112Q162C	Vdet-IC	1.6V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y017	-	R3112Q172C	Vdet-IC	1.7V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Y018	-	R3112Q182C	Vdet-IC	1.8V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y019	-	R3112Q192C	Vdet-IC	1.9V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y02	-	R1131N121B5	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y020	-	R3112Q202C	Vdet-IC	2.0V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y021	-	R3112Q212C	Vdet-IC	2.1V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y022	-	R3112Q222C	Vdet-IC	2.2V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y023	-	R3112Q232C	Vdet-IC	2.3V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y024	-	R3112Q242C	Vdet-IC	2.4V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y025	-	R3112Q252C	Vdet-IC	2.5V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y026	-	R3112Q262C	Vdet-IC	2.6V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y027	-	R3112Q272C	Vdet-IC	2.7V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y028	-	R3112Q282C	Vdet-IC	2.8V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y029	-	R3112Q292C	Vdet-IC	2.9V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y030	-	R3112Q302C	Vdet-IC	3V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y031	-	R3112Q312C	Vdet-IC	3.1V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y032	-	R3112Q322C	Vdet-IC	3.2V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y033	-	R3112Q332C	Vdet-IC	3.3V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y034	-	R3112Q342C	Vdet-IC	3.4V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y035	-	R3112Q352C	Vdet-IC	3.5V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y036	-	R3112Q362C	Vdet-IC	3.6V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y037	-	R3112Q372C	Vdet-IC	3.7V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y038	-	R3112Q382C	Vdet-IC	3.8V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y039	-	R3112Q392C	Vdet-IC	3.9V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y040	-	R3112Q402C	Vdet-IC	4V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y041	-	R3112Q412C	Vdet-IC	4.1V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y042	-	R3112Q422C	Vdet-IC	4.2V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y043	-	R3112Q432C	Vdet-IC	4.3V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y044	-	R3112Q442C	Vdet-IC	4.4V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y045	-	R3112Q452C	Vdet-IC	4.5V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y046	-	R3112Q462C	Vdet-IC	4.6V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y047	-	R3112Q472C	Vdet-IC	4.7V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y048	-	R3112Q482C	Vdet-IC	4.8V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y049	-	R3112Q492C	Vdet-IC	4.9V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y050	-	R3112Q502C	Vdet-IC	5V±2%, -Reset ODO	SC-88A	28rv	VD1	6ma	Ric
Y08	-	R1131N081B	LVR-IC	LDO, 0.8V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y09	-	R1131N091B	LVR-IC	LDO, 0.9V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y0A	-	R3119N092A	Vdet-IC	9.2V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0A	-	XC6118N40AMR-G	Vdet-IC	4.0V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
Y0B	-	R3119N093A	Vdet-IC	9.3V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0B	-	XC6118N40BMR-G	Vdet-IC	4.0V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
Y0C	-	R3119N094A	Vdet-IC	9.4V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0C	-	XC6118N40CMR-G	Vdet-IC	4.0V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
Y0D	-	R3119N095A	Vdet-IC	9.5V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0D	-	XC6118N40DMR-G	Vdet-IC	4.0V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
Y0E	-	R3119N096A	Vdet-IC	9.6V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0F	-	R3119N097A	Vdet-IC	9.7V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0G	-	R3119N098A	Vdet-IC	9.8V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0H	-	R3119N099A	Vdet-IC	9.9V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0J	-	R3119N100A	Vdet-IC	10.0V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0K	-	R3119N101A	Vdet-IC	10.1V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0L	-	R3119N102A	Vdet-IC	10.2V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0M	-	R3119N103A	Vdet-IC	10.3V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0N	-	R3119N104A	Vdet-IC	10.4V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0P	-	R3119N105A	Vdet-IC	10.5V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0R	-	R3119N106A	Vdet-IC	10.6V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0S	-	R3119N107A	Vdet-IC	10.7V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0T	-	R3119N108A	Vdet-IC	10.8V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0U	-	R3119N109A	Vdet-IC	10.9V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0V	-	R3119N110A	Vdet-IC	11.0V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0W	-	R3119N111A	Vdet-IC	11.1V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0X	-	R3119N112A	Vdet-IC	11.2V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0Y	-	R3119N113A	Vdet-IC	11.3V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Y0Z	-	R3119N114A	Vdet-IC	11.4V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
y1	-	BD46E342G-M	Vdet-IC	3.4V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
Y1	-	R1210N512C	DC-DC-IC	PWM step-up, 5.1V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Y10	-	R1131N101B	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y11	-	R1131N111B	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y12	-	R1131N121B	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y13	-	R1131N131B	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y14	-	R1131N141B	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Y15	-	R1131N151B	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y15	eb	XC9110E151MR	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y16	-	R1131N161B	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y16	eb	XC9110E161MR	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y17	-	R1131N171B	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y17	eb	XC9110E171MR	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y18	-	R1131N181B	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y18	eb	XC9110E181MR	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y19	-	R1131N191B	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y19	eb	XC9110E191MR	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y1A	-	R3119N092E	Vdet-IC	9.2V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1A	-	XC6118N41AMR-G	Vdet-IC	4.1V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
Y1B	-	R3119N093E	Vdet-IC	9.3V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1B	-	XC6118N41BMR-G	Vdet-IC	4.1V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
Y1C	-	R3119N094E	Vdet-IC	9.4V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1C	-	XC6118N41CMR-G	Vdet-IC	4.1V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
Y1D	-	R3119N095E	Vdet-IC	9.5V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1D	-	XC6118N41DMR-G	Vdet-IC	4.1V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
Y1E	-	R3119N096E	Vdet-IC	9.6V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1F	-	R3119N097E	Vdet-IC	9.7V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1G	-	R3119N098E	Vdet-IC	9.8V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1H	-	R3119N099E	Vdet-IC	9.9V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1J	-	R3119N100E	Vdet-IC	10.0V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1K	-	R3119N101E	Vdet-IC	10.1V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1L	-	R3119N102E	Vdet-IC	10.2V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1M	-	R3119N103E	Vdet-IC	10.3V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1N	-	R3119N104E	Vdet-IC	10.4V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1P	-	R3119N105E	Vdet-IC	10.5V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1R	-	R3119N106E	Vdet-IC	10.6V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1S	-	R3119N107E	Vdet-IC	10.7V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1T	-	R3119N108E	Vdet-IC	10.8V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1U	-	R3119N109E	Vdet-IC	10.9V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1V	-	R3119N110E	Vdet-IC	11.0V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1W	-	R3119N111E	Vdet-IC	11.1V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1X	-	R3119N112E	Vdet-IC	11.2V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1Y	-	R3119N113E	Vdet-IC	11.3V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Y1Z	-	R3119N114E	Vdet-IC	11.4V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
y2	-	BD46E352G-M	Vdet-IC	3.5V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
Y2	-	R1210N522C	DC-DC-IC	PWM step-up, 5.2V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Y20	-	R1131N201B	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y20	eb	XC9110E201MR	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y20	eh	XC6381E201M	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y21	-	R1131N211B	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y21	eb	XC9110E211MR	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y21	eh	XC6381E211M	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y22	-	R1131N221B	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y22	eb	XC9110E221MR	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y22	eh	XC6381E221M	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y23	-	R1131N231B	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y23	eb	XC9110E231MR	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y23	eh	XC6381E231M	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y24	-	R1131N241B	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y24	eb	XC9110E241MR	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y24	eh	XC6381E241M	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y25	-	R1131N251B	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y25	eb	XC9110E251MR	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y25	eh	XC6381E251M	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y26	-	R1131N261B	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y26	eb	XC9110E261MR	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y26	eh	XC6381E261M	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y27	-	R1131N271B	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y27	eb	XC9110E271MR	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y27	eh	XC6381E271M	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y28	-	R1131N281B	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y28	eb	XC9110E281MR	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y28	eh	XC6381E281M	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y29	-	R1131N291B	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y29	eb	XC9110E291MR	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y29	eh	XC6381E291M	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y2A	-	XC6118N42AMR-G	Vdet-IC	4.2V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Y2B	-	XC6118N42BMR-G	Vdet-IC	4.2V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
Y2C	-	XC6118N42CMR-G	Vdet-IC	4.2V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
Y2D	-	XC6118N42DMR-G	Vdet-IC	4.2V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
y3	-	BD46E362G-M	Vdet-IC	3.6V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
Y3	-	R1210N532C	DC-DC-IC	PWM step-up, 5.3V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Y3-	-	RT9198-4GPBG	LVR-IC	LDO, 4.75V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
Y3=	-	RT9198-4GGBG	LVR-IC	LDO, 4.75V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
Y30	-	R1131N301B	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y30	eb	XC9110E301MR	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y30	eh	XC6381E301M	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y31	-	R1131N311B	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y31	eb	XC9110E311MR	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y31	eh	XC6381E311M	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y32	-	R1131N321B	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y32	eb	XC9110E321MR	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y32	eh	XC6381E321M	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y33	-	R1131N331B	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SOT-23-5	28cx	VR4	6g	Ric
Y33	eb	XC9110E331MR	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y33	eh	XC6381E331M	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y34	eb	XC9110E341MR	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y34	eh	XC6381E341M	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y35	eb	XC9110E351MR	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y35	eh	XC6381E351M	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y36	eb	XC9110E361MR	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y36	eh	XC6381E361M	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y37	eb	XC9110E371MR	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y37	eh	XC6381E371M	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y38	eb	XC9110E381MR	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y38	eh	XC6381E381M	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y39	eb	XC9110E391MR	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y39	eh	XC6381E391M	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y3A	-	XC6118N43AMR-G	Vdet-IC	4.3V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
Y3B	-	XC6118N43BMR-G	Vdet-IC	4.3V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
Y3C	-	XC6118N43CMR-G	Vdet-IC	4.3V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
Y3D	-	XC6118N43DMR-G	Vdet-IC	4.3V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
y4	-	BD46E372G-M	Vdet-IC	3.7V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
Y4	-	R1210N542C	DC-DC-IC	PWM step-up, 5.4V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Y4-	-	RT9198-33PBG	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
Y4=	-	RT9198-33GBG	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
Y40	-	R1172N181B5	LVR-IC	LDO, 1.85V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y40	eb	XC9110E401MR	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y40	eh	XC6381E401M	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y41	-	R1172N281B5	LVR-IC	LDO, 2.85V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y41	eb	XC9110E411MR	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y41	eh	XC6381E411M	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y42	eb	XC9110E421MR	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y42	eh	XC6381E421M	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y43	eb	XC9110E431MR	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y43	eh	XC6381E431M	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y44	eb	XC9110E441MR	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y44	eh	XC6381E441M	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y45	eb	XC9110E451MR	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y45	eh	XC6381E451M	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y46	eb	XC9110E461MR	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y46	eh	XC6381E461M	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y47	eb	XC9110E471MR	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y47	eh	XC6381E471M	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y48	-	R1172N081B	LVR-IC	LDO, 0.8V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y48	eb	XC9110E481MR	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y48	eh	XC6381E481M	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y49	-	R1172N091B	LVR-IC	LDO, 0.9V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y49	eb	XC9110E491MR	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y49	eh	XC6381E491M	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y4A	-	XC6118N44AMR-G	Vdet-IC	4.4V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
Y4B	-	XC6118N44BMR-G	Vdet-IC	4.4V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
Y4C	-	XC6118N44CMR-G	Vdet-IC	4.4V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
Y4D	-	XC6118N44DMR-G	Vdet-IC	4.4V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
y5	-	BD46E382G-M	Vdet-IC	3.8V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
Y5	-	FMY5	Si-n/p	Dual, GP, 120V, 50mA, 140MHz	SOT-23-5	28td	T12a	6a	Rhm
Y5	-	R1210N552C	DC-DC-IC	PWM step-up, 5.5V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Y50	-	R1172N101B	LVR-IC	LDO, 1.0V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y50	eb	XC9110E501MR	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y50	eh	XC6381E501M	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y51	-	R1172N111B	LVR-IC	LDO, 1.1V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y51	eb	XC9110E511MR	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y51	eh	XC6381E511M	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y52	-	R1172N121B	LVR-IC	LDO, 1.2V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y52	eb	XC9110E521MR	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y52	eh	XC6381E521M	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y53	-	R1172N131B	LVR-IC	LDO, 1.3V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y53	eb	XC9110E531MR	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y53	eh	XC6381E531M	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y54	-	R1172N141B	LVR-IC	LDO, 1.4V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y54	eb	XC9110E541MR	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y54	eh	XC6381E541M	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y55	-	R1172N151B	LVR-IC	LDO, 1.5V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y55	eb	XC9110E551MR	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y55	eh	XC6381E551M	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y56	-	R1172N161B	LVR-IC	LDO, 1.6V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y56	eb	XC9110E561MR	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y56	eh	XC6381E561M	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y57	-	R1172N171B	LVR-IC	LDO, 1.7V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y57	eb	XC9110E571MR	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y57	eh	XC6381E571M	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y58	-	R1172N181B	LVR-IC	LDO, 1.8V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y58	eb	XC9110E581MR	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y58	eh	XC6381E581M	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y59	-	R1172N191B	LVR-IC	LDO, 1.9V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y59	eb	XC9110E591MR	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y59	eh	XC6381E591M	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y5A	-	XC6118N45AMR-G	Vdet-IC	4.5V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
Y5B	-	XC6118N45BMR-G	Vdet-IC	4.5V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
Y5C	-	XC6118N45CMR-G	Vdet-IC	4.5V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
Y5D	-	XC6118N45DMR-G	Vdet-IC	4.5V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
y6	-	BD46E392G-M	Vdet-IC	3.9V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
Y6	-	FMY6	Si-n/p	Dual, GP, 40V, 500mA, 200 (250)MHz	SOT-23-5	28td	T12a	6a	Rhm
Y6	-	R1210N562C	DC-DC-IC	PWM step-up, 5.6V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Y60	-	R1172N201B	LVR-IC	LDO, 2.0V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y60	eb	XC9110E601MR	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y60	eh	XC6381E601M	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y61	-	R1172N211B	LVR-IC	LDO, 2.1V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y61	eb	XC9110E611MR	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y61	eh	XC6381E611M	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y62	-	R1172N221B	LVR-IC	LDO, 2.2V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y62	eb	XC9110E621MR	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y62	eh	XC6381E621M	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y63	-	R1172N231B	LVR-IC	LDO, 2.3V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y63	eb	XC9110E631MR	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y63	eh	XC6381E631M	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y64	-	R1172N241B	LVR-IC	LDO, 2.4V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y64	eb	XC9110E641MR	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y64	eh	XC6381E641M	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y65	-	R1172N251B	LVR-IC	LDO, 2.5V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y65	eb	XC9110E651MR	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y65	eh	XC6381E651M	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y66	-	R1172N261B	LVR-IC	LDO, 2.6V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y66	eb	XC9110E661MR	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y66	eh	XC6381E661M	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y67	-	R1172N271B	LVR-IC	LDO, 2.7V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y67	eb	XC9110E671MR	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y67	eh	XC6381E671M	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y68	-	R1172N281B	LVR-IC	LDO, 2.8V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y68	eb	XC9110E681MR	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y68	eh	XC6381E681M	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y69	-	R1172N291B	LVR-IC	LDO, 2.9V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y69	eb	XC9110E691MR	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y69	eh	XC6381E691M	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y6A	-	XC6118N46AMR-G	Vdet-IC	4.6V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
Y6B	-	XC6118N46BMR-G	Vdet-IC	4.6V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
Y6C	-	XC6118N46CMR-G	Vdet-IC	4.6V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Y6D	-	XC6118N46DMR-G	Vdet-IC	4.6V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
y7	-	BD46E402G-M	Vdet-IC	4.0V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
Y7	-	R1210N572C	DC-DC-IC	PWM step-up, 5.7V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Y7-	-	RT9198-35PBR	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
Y70	-	R1172N301B	LVR-IC	LDO, 3.0V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y70	eb	XC9110E701MR	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA	SOT-25	28sx	DC4	6g	Tor
Y70	eh	XC6381E701M	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 155kHz, int. Vdd	SOT-23-5	28sx	DC4	6g	Tor
Y71	-	R1172N311B	LVR-IC	LDO, 3.1V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y72	-	R1172N321B	LVR-IC	LDO, 3.2V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y73	-	R1172N331B	LVR-IC	LDO, 3.3V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y74	-	R1172N341B	LVR-IC	LDO, 3.4V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y75	-	R1172N351B	LVR-IC	LDO, 3.5V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y76	-	R1172N361B	LVR-IC	LDO, 3.6V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y77	-	R1172N371B	LVR-IC	LDO, 3.7V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y78	-	R1172N381B	LVR-IC	LDO, 3.8V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y79	-	R1172N391B	LVR-IC	LDO, 3.9V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y7A	-	XC6118N47AMR-G	Vdet-IC	4.7V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
Y7B	-	XC6118N47BMR-G	Vdet-IC	4.7V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
Y7C	-	XC6118N47CMR-G	Vdet-IC	4.7V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
Y7D	-	XC6118N47DMR-G	Vdet-IC	4.7V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
y8	-	BD46E412G-M	Vdet-IC	4.1V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
Y8	-	R1210N582C	DC-DC-IC	PWM step-up, 5.8V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Y8-	-	RT9198-39PBG	LVR-IC	LDO, 3.9V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
Y80	-	R1172N401B	LVR-IC	LDO, 4.0V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y81	-	R1172N411B	LVR-IC	LDO, 4.1V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y82	-	R1172N421B	LVR-IC	LDO, 4.2V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y83	-	R1172N431B	LVR-IC	LDO, 4.3V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y84	-	R1172N441B	LVR-IC	LDO, 4.4V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y85	-	R1172N451B	LVR-IC	LDO, 4.5V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y86	-	R1172N461B	LVR-IC	LDO, 4.6V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y87	-	R1172N471B	LVR-IC	LDO, 4.7V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y88	-	R1172N481B	LVR-IC	LDO, 4.8V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y89	-	R1172N491B	LVR-IC	LDO, 4.9V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y8A	-	XC6118N48AMR-G	Vdet-IC	4.8V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
Y8B	-	XC6118N48BMR-G	Vdet-IC	4.8V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
Y8C	-	XC6118N48CMR-G	Vdet-IC	4.8V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
Y8D	-	XC6118N48DMR-G	Vdet-IC	4.8V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
y9	-	BD46E422G-M	Vdet-IC	4.2V±1%, -MR, -Reset PPO, Td=200ms	SSOP-5	28vdp	VD5	6c	Rhm
Y9	-	R1210N592C	DC-DC-IC	PWM step-up, 5.9V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Y90	-	R1172N501B	LVR-IC	LDO, 5.0V±2%, 1A, +CE	SOT-23-5	28vrd	VR4	6g	Ric
Y9A	-	XC6118N49AMR-G	Vdet-IC	4.9V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
Y9B	-	XC6118N49BMR-G	Vdet-IC	4.9V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
Y9C	-	XC6118N49CMR-G	Vdet-IC	4.9V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
Y9D	-	XC6118N49DMR-G	Vdet-IC	4.9V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
Ya	-	BD45E335G-M	Vdet-IC	3.3V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
YA	-	BU4209FWE	Vdet-IC	0.9V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YA	-	BU4209G	Vdet-IC	0.9V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YA	-	RN2501	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=4.7k/4.7k	SMV	30/TD9	TD9	6a	Tos
YA	-	RN2701	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	SOT-353	28	TD9	6a	Tos
YA	-	RN2701JE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=4.7k/4.7k	SOT-553	30/TD9	TD9	6a	Tos
YA	-	RN5RK202A	DC-DC-IC	VFM step-up, Vout=2.0V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
Yb	-	BD45E345G-M	Vdet-IC	3.4V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
YB	-	74LVC1G38GV	CMOS-Log	2-input NAND gate (ODO)	SOT753	28	Log17	6a	Nxp
YB	-	74LVC1G38GW	CMOS-Log	2-input NAND gate (ODO)	SOT-353-1	28	Log17	6a	Nxp
YB	-	BU4210FWE	Vdet-IC	1.0V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YB	-	BU4210G	Vdet-IC	1.0V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YB	-	RN2502	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=10k/10k	SMV	30/TD9	TD9	6a	Tos
YB	-	RN2702	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SOT-353	28	TD9	6a	Tos
YB	-	RN2702JE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=10k/10k	SOT-553	30/TD9	TD9	6a	Tos
YB	-	RN5RK252A	DC-DC-IC	VFM step-up, Vout=2.5V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
Yc	-	BD45E355G-M	Vdet-IC	3.5V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
YC	-	BU4211FWE	Vdet-IC	1.1V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YC	-	BU4211G	Vdet-IC	1.1V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YC	-	R1210N222D	DC-DC-IC	PWM step-up, 2.1V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YC	-	RN2503	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=22k/22k	SMV	30/TD9	TD9	6a	Tos
YC	-	RN2703	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SOT-353	28	TD9	6a	Tos
YC	-	RN2703JE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=22k/22k	SOT-553	30/TD9	TD9	6a	Tos
YC	-	RN5RK272A	DC-DC-IC	VFM step-up, Vout=2.7V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
Yd	-	BD45E365G-M	Vdet-IC	3.6V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
YD	-	BU4212FWE	Vdet-IC	1.2V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
YD	-	BU4212G	Vdet-IC	1.2V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YD	-	R1210N232D	DC-DC-IC	PWM step-up, 2.3V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YD	-	RN2504	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=47k/47k	SMV	30/TD9	TD9	6a	Tos
YD	-	RN2704	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SOT-353	28	TD9	6a	Tos
YD	-	RN2704JE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=47k/47k	SOT-553	30/TD9	TD9	6a	Tos
YD	-	RN5RK302A	DC-DC-IC	VFM step-up, Vout=3.0V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
YD2A	-	LSP2132ST2RX440	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YD2T	-	LSP2132ST25X440	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YD3A	-	LSP2132ST2RX450	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YD3T	-	LSP2132ST25X450	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YD4A	-	LSP2132ST2RX460	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YD4T	-	LSP2132ST25X460	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YD5A	-	LSP2132ST2RX470	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YD5T	-	LSP2132ST25X470	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YD6A	-	LSP2132ST2RX470	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YD6T	-	LSP2132ST25X470	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YD7A	-	LSP2132ST2RX480	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YD7T	-	LSP2132ST25X480	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YD8A	-	LSP2132ST2RX490	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YD8T	-	LSP2132ST25X490	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YD9A	-	LSP2132ST2RX500	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YD9T	-	LSP2132ST25X500	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDaA	-	LSP2132ST2RX380	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDAA	-	LSP2132ST2RX120	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDaT	-	LSP2132ST25X380	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDAT	-	LSP2132ST25X120	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDAT	-	YB1253ST25X120	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDbA	-	LSP2132ST2RX390	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDBA	-	LSP2132ST2RX130	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDbT	-	LSP2132ST25X390	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDBT	-	LSP2132ST25X130	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDBT	-	YB1253ST25X130	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDCA	-	LSP2132ST2RX140	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDCT	-	LSP2132ST25X140	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDCT	-	YB1253ST25X140	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDdA	-	LSP2132ST2RX400	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDDA	-	LSP2132ST2RX150	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDdT	-	LSP2132ST25X400	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDDT	-	LSP2132ST25X150	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDDT	-	YB1253ST25X150	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDeA	-	LSP2132ST2RX410	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDEA	-	LSP2132ST2RX160	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDeT	-	LSP2132ST25X410	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDET	-	LSP2132ST25X160	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDET	-	YB1253ST25X160	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDfA	-	LSP2132ST2RX420	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDFA	-	LSP2132ST2RX170	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDfT	-	LSP2132ST25X420	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDFT	-	LSP2132ST25X170	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDFT	-	YB1253ST25X170	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDgA	-	LSP2132ST2RX430	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDGA	-	LSP2132ST2RX180	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDgT	-	LSP2132ST25X430	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDGT	-	LSP2132ST25X180	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDGT	-	YB1253ST25X180	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDHA	-	LSP2132ST2RX190	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDHT	-	LSP2132ST25X190	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDHT	-	YB1253ST25X190	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDIA	-	LSP2132ST2RX200	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDIT	-	LSP2132ST25X200	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDIT	-	YB1253ST25X200	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDJA	-	LSP2132ST2RX210	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDJT	-	LSP2132ST25X210	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDJT	-	YB1253ST25X210	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDKA	-	LSP2132ST2RX220	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDKT	-	LSP2132ST25X220	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDKT	-	YB1253ST25X220	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDLA	-	LSP2132ST2RX230	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDLT	-	LSP2132ST25X230	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDLT	-	YB1253ST25X230	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
YDMA	-	LSP2132ST2RX240	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDMT	-	LSP2132ST25X240	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDMT	-	YB1253ST25X240	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDNA	-	LSP2132ST2RX250	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDNT	-	LSP2132ST25X250	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDNT	-	YB1253ST25X250	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDOA	-	LSP2132ST2RX260	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDOT	-	LSP2132ST25X260	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDOT	-	YB1253ST25X260	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDPA	-	LSP2132ST2RX270	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDPT	-	LSP2132ST25X270	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDPT	-	YB1253ST25X270	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDQA	-	LSP2132ST2RX280	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDQT	-	LSP2132ST25X280	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDQT	-	YB1253ST25X280	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDRA	-	LSP2132ST2RX290	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDRT	-	LSP2132ST25X290	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDRT	-	YB1253ST25X290	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDSA	-	LSP2132ST2RX300	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDST	-	LSP2132ST25X300	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDST	-	YB1253ST25X300	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDTA	-	LSP2132ST2RX310	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDTT	-	LSP2132ST25X310	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDTT	-	YB1253ST25X310	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDUA	-	LSP2132ST2RX320	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDUT	-	LSP2132ST25X320	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDUT	-	YB1253ST25X320	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDVA	-	LSP2132ST2RX330	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDVT	-	LSP2132ST25X330	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDVT	-	YB1253ST25X330	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDWA	-	LSP2132ST2RX340	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDWT	-	LSP2132ST25X340	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDWT	-	YB1253ST25X340	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDXA	-	LSP2132ST2RX350	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDXT	-	LSP2132ST25X350	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDXT	-	YB1253ST25X350	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDYA	-	LSP2132ST2RX360	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDYT	-	LSP2132ST25X360	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
YDYT	-	YB1253ST25X360	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-25	28cx	VR7	6a	Ybn
YDZA	-	LSP2132ST2RX370	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-25	28sp	VR7	6a	Jbs
YDZT	-	LSP2132ST25X370	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-25	28cx	VR4	6a	Jbs
Ye	-	BD45E375G-M	Vdet-IC	3.7V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
YE	-	BU4213FWE	Vdet-IC	1.3V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YE	-	BU4213G	Vdet-IC	1.3V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YE	-	R1210N242D	DC-DC-IC	PWM step-up, 2.4V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YE	-	RN2505	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=2.2k/47k	SMV	30/TD9	TD9	6a	Tos
YE	-	RN2705	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	SOT-353	28	TD9	6a	Tos
YE	-	RN2705JE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=2.2k/47k	SOT-553	30/TD9	TD9	6a	Tos
YE	-	RN5RK332A	DC-DC-IC	VFM step-up, Vout=3.3V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
Yf	-	BD45E385G-M	Vdet-IC	3.8V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
YF	-	BU4214FWE	Vdet-IC	1.4V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YF	-	BU4214G	Vdet-IC	1.4V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YF	-	R1210N252D	DC-DC-IC	PWM step-up, 2.5V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YF	-	RN2506	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=4.7k/47k	SMV	30/TD9	TD9	6a	Tos
YF	-	RN2706	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	SOT-353	28	TD9	6a	Tos
YF	-	RN2706JE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=4.7k/47k	SOT-553	30/TD9	TD9	6a	Tos
YF	-	RN5RK502A	DC-DC-IC	VFM step-up, Vout=5.0V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
Yg	-	BD45E395G-M	Vdet-IC	3.9V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
YG	-	BU4215FWE	Vdet-IC	1.5V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YG	-	BU4215G	Vdet-IC	1.5V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YG	-	R1210N262D	DC-DC-IC	PWM step-up, 2.6V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YG	-	RN5RK552A	DC-DC-IC	VFM step-up, Vout=5.5V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
Yh	-	BD45E405G-M	Vdet-IC	4.0V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
YH	-	BU4216FWE	Vdet-IC	1.6V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YH	-	BU4216G	Vdet-IC	1.6V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YH	-	R1210N272D	DC-DC-IC	PWM step-up, 2.7V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YH	-	RN2507	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=10k/47k	SMV	30/TD9	TD9	6a	Tos
YH	-	RN2707	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	SOT-353	28	TD9	6a	Tos
YH	-	RN2707JE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=10k/47k	SOT-553	30/TD9	TD9	6a	Tos
YH	-	RN5RK522A	DC-DC-IC	VFM step-up, Vout=5.2V±1.5%	SOT-23-5	28sc	DC3	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
YH-	-	RT9198-19PBR	LVR-IC	LDO, 1.9V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
YI	-	RN2508	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=22k/47k	SMV	30/TD9	TD9	6a	Tos
YI	-	RN2708	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	SOT-353	28	TD9	6a	Tos
YI	-	RN2708JE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=22k/47k	SOT-553	30/TD9	TD9	6a	Tos
YJ	-	BU4217FWE	Vdet-IC	1.7V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YJ	-	BU4217G	Vdet-IC	1.7V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YJ	-	R1210N282D	DC-DC-IC	PWM step-up, 2.8V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YJ	-	RN2509	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=47k/22k	SMV	30/TD9	TD9	6a	Tos
YJ	-	RN2709	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	SOT-353	28	TD9	6a	Tos
YJ	-	RN2709JE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=47k/22k	SOT-553	30/TD9	TD9	6a	Tos
YJ	-	RN5RK222A	DC-DC-IC	VFM step-up, Vout=2.2V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
YJ-	-	RT9818A-20PB	Vdet-IC	2.0V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Rct
YJ12	-	SGM2019-1.2YC5G	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ12	-	SGM2019-1.2YN5G	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJ13	-	SGM2019-1.3YC5G	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ13	-	SGM2019-1.3YN5G	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJ15	-	SGM2019-1.5YC5G	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ15	-	SGM2019-1.5YN5G	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJ18	-	SGM2019-1.8YC5G	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ18	-	SGM2019-1.8YN5G	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJ21	-	SGM2019-2.1YC5G	LVR-IC	LDO, 2.1V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ21	-	SGM2019-2.1YN5G	LVR-IC	LDO, 2.1V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJ25	-	SGM2019-2.5YC5G	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ25	-	SGM2019-2.5YN5G	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJ27	-	SGM2019-2.7YC5G	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ27	-	SGM2019-2.7YN5G	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJ28	-	SGM2019-2.8YC5G	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ28	-	SGM2019-2.8YN5G	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJ29	-	SGM2019-2.9YC5G	LVR-IC	LDO, 2.9V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ29	-	SGM2019-2.9YN5G	LVR-IC	LDO, 2.9V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJ2J	-	SGM2019-2.85YC5G	LVR-IC	LDO, 2.85V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ2J	-	SGM2019-2.85YN5G	LVR-IC	LDO, 2.85V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJ30	-	SGM2019-3.0YC5G	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ30	-	SGM2019-3.0YN5G	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJ31	-	SGM2019-3.1YC5G	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ31	-	SGM2019-3.1YN5G	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJ32	-	SGM2019-3.2YC5G	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ32	-	SGM2019-3.2YN5G	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJ33	-	SGM2019-3.3YC5G	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ33	-	SGM2019-3.3YN5G	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJ36	-	SGM2019-3.6YC5G	LVR-IC	LDO, 3.6V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ36	-	SGM2019-3.6YN5G	LVR-IC	LDO, 3.6V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJ42	-	SGM2019-4.2YC5G	LVR-IC	LDO, 4.2V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ42	-	SGM2019-4.2YN5G	LVR-IC	LDO, 4.2V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJ50	-	SGM2019-5.0YC5G	LVR-IC	LDO, 5.0V±2%, 500mA, +CE	SC-70-5	28vrx	VR7	6a	Sgm
YJ50	-	SGM2019-5.0YN5G	LVR-IC	LDO, 5.0V±2%, 500mA, +CE	SOT-23-5	28vrx	VR7	6a	Sgm
YJAA	-	SGM2019-ADJYC5G	LVR-IC	LDO, Adjustable 1.2..5.0V, 500mA, +CE	SC-70-5	28sg	VR16	6a	Sgm
YJAA	-	SGM2019-ADJYN5G	LVR-IC	LDO, Adjustable 1.2..5.0V, 500mA, +CE	SOT-23-5	28sg	VR16	6a	Sgm
Yk	-	BD45E415G-M	Vdet-IC	4.1V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
YK	-	BU4218FWE	Vdet-IC	1.8V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YK	-	BU4218G	Vdet-IC	1.8V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YK	-	R1210N292D	DC-DC-IC	PWM step-up, 2.9V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YK	-	RN2510	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=4.7k/0k	SMV	30/TD9	TD9	6a	Tos
YK	-	RN2710	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/0k	SOT-353	28	TD9	6a	Tos
YK	-	RN2710JE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=4.7k/0k	SOT-553	30/TD9	TD9	6a	Tos
YK	-	RN5RK452A	DC-DC-IC	VFM step-up, Vout=4.5V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
YK-	-	RT9818C-20PB	Vdet-IC	2.0V±1.5%, -Reset ODO, Td=220ms	SOT-23-5	28vdm	VD6	6a	Rct
YL	-	74LVC1G384GV	CMOS-Log	Bilateral analogic switch	SOT753	28	Log16	6a	Nxp
YL	-	74LVC1G384GW	CMOS-Log	Bilateral analogic switch	SOT-353-1	28	Log16	6a	Nxp
YL	-	BD45462G	Vdet-IC	4.6V±1%, -MR, -Reset ODO, 200ms	SSOP-5	28vdp	VD4	6c	Rhm
YL	-	BU4219FWE	Vdet-IC	1.9V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YL	-	BU4219G	Vdet-IC	1.9V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YL	-	R1210N302D	DC-DC-IC	PWM step-up, 3V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YL	-	RN5RK532A	DC-DC-IC	VFM step-up, Vout=5.3V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
YL-	-	RT9818A-36PB	Vdet-IC	3.6V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Rct
Ym	-	BD45E425G-M	Vdet-IC	4.2V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
YM	-	BU4220FWE	Vdet-IC	2.0V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YM	-	BU4220G	Vdet-IC	2.0V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YM	-	R1210N312D	DC-DC-IC	PWM step-up, 3.1V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YM	-	RN2511	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=10k/0k	SMV	30/TD9	TD9	6a	Tos



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
YM	-	RN2711	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/0k	SOT-353	28	TD9	6a	Tos
YM	-	RN2711JE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=10k/0k	SOT-553	30/TD9	TD9	6a	Tos
YM	-	RN5RK352A	DC-DC-IC	VFM step-up, Vout=3.5V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
YM-	-	RT9818A-39PB	Vdet-IC	3.9V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Rct
Yn	-	BD45E435G-M	Vdet-IC	4.3V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
YN	-	74LVC1G34GV	CMOS-Log	Noninverting buffer	SOT753	28	Log10	6a	Nxp
YN	-	74LVC1G34GW	CMOS-Log	Noninverting buffer	SOT-353-1	28	Log10	6a	Nxp
YN	-	BU4221FWE	Vdet-IC	2.1V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YN	-	BU4221G	Vdet-IC	2.1V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YN	-	R1210N322D	DC-DC-IC	PWM step-up, 3.2V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YN	-	RN5RK362A	DC-DC-IC	VFM step-up, Vout=3.6V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
Yp	-	BD45E445G-M	Vdet-IC	4.4V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
YP	-	74AHC1GU04SE	CMOS-Log	Inverter	SOT-353	28	Log6	6t	Di
YP	-	74AHC1GU04W5	CMOS-Log	Inverter	SOT-25	28	Log6	6t	Di
YP	-	BU4222FWE	Vdet-IC	2.2V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YP	-	BU4222G	Vdet-IC	2.2V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YP	-	R1210N332D	DC-DC-IC	PWM step-up, 3.3V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YP	-	RN5RK462A	DC-DC-IC	VFM step-up, Vout=4.6V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
YQ	-	BU4223FWE	Vdet-IC	2.3V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YQ	-	BU4223G	Vdet-IC	2.3V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YQ	-	R1210N342D	DC-DC-IC	PWM step-up, 3.4V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YQ	-	RN5RK472A	DC-DC-IC	VFM step-up, Vout=4.7V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
Yr	-	BD45E455G-M	Vdet-IC	4.5V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
YR	-	74AHC1G00SE	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6t	Di
YR	-	74AHC1G00W5	CMOS-Log	2-input NAND gate	SOT-25	28	Log1	6t	Di
YR	-	BU4224FWE	Vdet-IC	2.4V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YR	-	BU4224G	Vdet-IC	2.4V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YR	-	R1210N352D	DC-DC-IC	PWM step-up, 3.5V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YR	-	RN5RK402A	DC-DC-IC	VFM step-up, Vout=4.0V±1.5%	SOT-23-5	28sc	DC3	6g	Ric
YS	-	74AHC1G02SE	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6t	Di
YS	-	74AHC1G02W5	CMOS-Log	2-input NOR gate	SOT-25	28	Log2	6t	Di
YS	-	BU4225FWE	Vdet-IC	2.5V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YS	-	BU4225G	Vdet-IC	2.5V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YS	-	R1210N362D	DC-DC-IC	PWM step-up, 3.6V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YT	-	74AHC1G04SE	CMOS-Log	Inverter	SOT-353	28	Log6	6t	Di
YT	-	74AHC1G04W5	CMOS-Log	Inverter	SOT-25	28	Log6	6t	Di
YT	-	BU4226FWE	Vdet-IC	2.6V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YT	-	BU4226G	Vdet-IC	2.6V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YT	-	R1210N372D	DC-DC-IC	PWM step-up, 3.7V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YU	-	74AHC1G08SE	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6t	Di
YU	-	74AHC1G08W5	CMOS-Log	2-input AND gate	SOT-25	28	Log3	6t	Di
YU	-	BU4227FWE	Vdet-IC	2.7V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YU	-	BU4227G	Vdet-IC	2.7V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YU	-	R1210N382D	DC-DC-IC	PWM step-up, 3.8V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YU-	-	RT9013-32PB	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
YV	-	74AHC1G14SE	CMOS-Log	Inverting Schmitt-trigger	SOT-353	28	Log7	6t	Di
YV	-	74AHC1G14W5	CMOS-Log	Inverting Schmitt-trigger	SOT-25	28	Log7	6t	Di
YV	-	BU4228FWE	Vdet-IC	2.8V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YV	-	BU4228G	Vdet-IC	2.8V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YV	-	R1210N392D	DC-DC-IC	PWM step-up, 3.9V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
YW	-	74AHC1G32SE	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6t	Di
YW	-	74AHC1G32W5	CMOS-Log	2-input OR gate	SOT-25	28	Log4	6t	Di
YW	-	BU4229FWE	Vdet-IC	2.9V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YW	-	BU4229G	Vdet-IC	2.9V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YW	-	R1210N601D	DC-DC-IC	PWM step-up, 6V, 180kHz	SOT-23-5	28sc	DC3	6g	Ric
YW-	-	RT9198-18PBG	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
YW=	-	RT9198-18GBG	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SOT-23-5	28cx	VR4	6a	Rct
YX	-	74AHC1G86SE	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353	28	Log5	6t	Di
YX	-	74AHC1G86W5	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-25	28	Log5	6t	Di
YX	-	BU4230FWE	Vdet-IC	3.0V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YX	-	BU4230G	Vdet-IC	3.0V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
Yy	-	BD45E465G-M	Vdet-IC	4.6V±1%, -MR, -Reset ODO, Td=50ms	SSOP-5	28vdp	VD4	6c	Rhm
YY	-	74AHC1G125SE	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log14	6t	Di
YY	-	74AHC1G125W5	CMOS-Log	Bus buffer gate with 3-state output	SOT-25	28	Log14	6t	Di
YY	-	BU4231FWE	Vdet-IC	3.1V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YY	-	BU4231G	Vdet-IC	3.1V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
YZ	-	74AHC1G126SE	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log13	6t	Di
YZ	-	74AHC1G126W5	CMOS-Log	Bus buffer gate with 3-state output	SOT-25	28	Log13	6t	Di
YZ	-	BU4232FWE	Vdet-IC	3.2V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
YZ	-	BU4232G	Vdet-IC	3.2V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Z0	-	R1210N402D	DC-DC-IC	PWM step-up, 4V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Z00	-	NC7SZ00P5	CMOS-Log	2-input NAND gate	SC-70-5	28	Log1	6a	F
Z00	-	R1131N181D5	LVR-IC	LDO, 1.85V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z01	-	R1131N281D5	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z02	-	NC7SZ02P5	CMOS-Log	2-input NOR gate	SC-70-5	28	Log2	6a	F
Z02	-	R1131N121D5	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z08	-	NC7SZ08P5	CMOS-Log	2-input AND gate	SC-70-5	28	Log3	6a	F
Z08	-	R1131N081D	LVR-IC	LDO, 0.8V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z09	-	R1131N091D	LVR-IC	LDO, 0.9V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z0A	-	R3119N115A	Vdet-IC	11.5V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Z0A	-	XC6118N50AMR-G	Vdet-IC	5.0V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	SOT-25	28mg	VD14	6g	Tor
Z0B	-	R3119N116A	Vdet-IC	11.6V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Z0B	-	XC6118N50BMR-G	Vdet-IC	5.0V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	SOT-25	28mg	VD14	6g	Tor
Z0C	-	R3119N117A	Vdet-IC	11.7V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Z0C	-	XC6118N50CMR-G	Vdet-IC	5.0V±2%, ±Reset ODO, Sense, hysteresis 5%	SOT-25	28mf	VD11	6g	Tor
Z0D	-	R3119N118A	Vdet-IC	11.8V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Z0D	-	XC6118N50DMR-G	Vdet-IC	5.0V±2%, ±Reset ODO, Sense, hysteresis <1%	SOT-25	28mf	VD11	6g	Tor
Z0E	-	R3119N119A	Vdet-IC	11.9V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Z0F	-	R3119N120A	Vdet-IC	12.0V±1.5%, -Reset ODO	SOT-23-5	28z1	VD1	6g	Ric
Z1	-	BZA856A	TVS	Quad, Vrwm=5.6V, 3.75A, 25W(1ms)	SOT-353	30	D16	6a	Phi
Z1	-	BZA956A	TVS	Quad, Vrwm=5.6V, 3.75A, 25W(1ms)	SOT-665	30	D16	6a	Phi
Z1	-	R1210N412D	DC-DC-IC	PWM step-up, 4.1V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Z10	-	R1131N101D	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z11	-	R1131N111D	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z12	-	R1131N121D	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z13	-	R1131N131D	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z14	-	R1131N141D	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z15	-	R1131N151D	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z15	eb	XC9110F151MR	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z16	-	R1131N161D	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z16	eb	XC9110F161MR	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z17	-	R1131N171D	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z17	eb	XC9110F171MR	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z18	-	R1131N181D	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z18	eb	XC9110F181MR	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z19	-	R1131N191D	LVR-IC	LDO, 1.9V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z19	eb	XC9110F191MR	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z1A	-	R3119N115E	Vdet-IC	11.5V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Z1B	-	R3119N116E	Vdet-IC	11.6V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Z1C	-	R3119N117E	Vdet-IC	11.7V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Z1D	-	R3119N118E	Vdet-IC	11.8V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Z1E	-	R3119N119E	Vdet-IC	11.9V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Z1F	-	R3119N120E	Vdet-IC	12.0V±1.5%, ±Reset ODO, Sense	SOT-23-5	28z2	VD11	6g	Ric
Z2	-	BZA862A	TVS	Quad, Vrwm=6.2V, 3.75A, 25W(1ms)	SOT-353	30	D16	6a	Phi
Z2	-	BZA962A	TVS	Quad, Vrwm=6.2V, 3.75A, 25W(1ms)	SOT-665	30	D16	6a	Phi
Z2	-	R1210N422D	DC-DC-IC	PWM step-up, 4.2V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Z20	-	R1131N201D	LVR-IC	LDO, 2.0V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z20	eb	XC9110F201MR	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z21	-	R1131N211D	LVR-IC	LDO, 2.1V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z21	eb	XC9110F211MR	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z22	-	R1131N221D	LVR-IC	LDO, 2.2V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z22	eb	XC9110F221MR	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z23	-	R1131N231D	LVR-IC	LDO, 2.3V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z23	eb	XC9110F231MR	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z24	-	R1131N241D	LVR-IC	LDO, 2.4V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z24	eb	XC9110F241MR	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z25	-	R1131N251D	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z25	eb	XC9110F251MR	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z26	-	R1131N261D	LVR-IC	LDO, 2.6V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z26	eb	XC9110F261MR	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z27	-	R1131N271D	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z27	eb	XC9110F271MR	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z28	-	R1131N281D	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z28	eb	XC9110F281MR	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z29	-	R1131N291D	LVR-IC	LDO, 2.9V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z29	eb	XC9110F291MR	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z3	-	BZA868A	TVS	Quad, Vrwm=6.8V, 3.75A, 25W(1ms)	SOT-353	30	D16	6a	Phi
Z3	-	BZA968A	TVS	Quad, Vrwm=6.8V, 3.75A, 25W(1ms)	SOT-665	30	D16	6a	Phi
Z3	-	R1210N432D	DC-DC-IC	PWM step-up, 4.3V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Z30	-	R1131N301D	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Z30	eb	XC9110F301MR	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z31	-	R1131N311D	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z31	eb	XC9110F311MR	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z32	-	R1131N321D	LVR-IC	LDO, 3.2V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z32	eb	XC9110F321MR	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z33	-	R1131N331D	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, CL	SOT-23-5	28cx	VR4	6g	Ric
Z33	eb	XC9110F331MR	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z34	eb	XC9110F341MR	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z35	eb	XC9110F351MR	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z36	eb	XC9110F361MR	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z37	eb	XC9110F371MR	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z38	eb	XC9110F381MR	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z39	eb	XC9110F391MR	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z4	-	BZA820A	TVS	Quad, Vrwm=20V, 3.75A, 17W(1ms)	SOT-353	30	D16	6a	Phi
Z4	-	R1210N442D	DC-DC-IC	PWM step-up, 4.4V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Z4	-	RT9808-23CB	Vdet-IC	2.3V±2%, -ODO +Reset	SOT-23-5	28vdm	VD6	6a	Rct
Z4-	-	RT9808-23PB	Vdet-IC	2.3V±2%, -ODO +Reset	SOT-23-5	28vdm	VD6	6a	Rct
Z40	-	R1172N181D5	LVR-IC	LDO, 1.85V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z40	eb	XC9110F401MR	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z41	-	R1172N281D5	LVR-IC	LDO, 2.85V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z41	eb	XC9110F411MR	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z42	eb	XC9110F421MR	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z43	eb	XC9110F431MR	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z44	eb	XC9110F441MR	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z45	eb	XC9110F451MR	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z46	eb	XC9110F461MR	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z47	eb	XC9110F471MR	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z48	-	R1172N081D	LVR-IC	LDO, 0.8V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z48	eb	XC9110F481MR	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z49	-	R1172N091D	LVR-IC	LDO, 0.9V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z49	eb	XC9110F491MR	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z5	-	R1210N452D	DC-DC-IC	PWM step-up, 4.5V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Z50	-	R1172N101D	LVR-IC	LDO, 1.0V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z50	eb	XC9110F501MR	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z51	-	R1172N111D	LVR-IC	LDO, 1.1V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z51	eb	XC9110F511MR	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z52	-	R1172N121D	LVR-IC	LDO, 1.2V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z52	eb	XC9110F521MR	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z53	-	R1172N131D	LVR-IC	LDO, 1.3V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z53	eb	XC9110F531MR	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z54	-	R1172N141D	LVR-IC	LDO, 1.4V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z54	eb	XC9110F541MR	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z55	-	R1172N151D	LVR-IC	LDO, 1.5V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z55	eb	XC9110F551MR	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z56	-	R1172N161D	LVR-IC	LDO, 1.6V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z56	eb	XC9110F561MR	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z57	-	R1172N171D	LVR-IC	LDO, 1.7V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z57	eb	XC9110F571MR	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z58	-	R1172N181D	LVR-IC	LDO, 1.8V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z58	eb	XC9110F581MR	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z59	-	R1172N191D	LVR-IC	LDO, 1.9V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z59	eb	XC9110F591MR	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z6	-	R1210N462D	DC-DC-IC	PWM step-up, 4.6V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Z60	-	R1172N201D	LVR-IC	LDO, 2.0V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z60	eb	XC9110F601MR	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z61	-	R1172N211D	LVR-IC	LDO, 2.1V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z61	eb	XC9110F611MR	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z62	-	R1172N221D	LVR-IC	LDO, 2.2V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z62	eb	XC9110F621MR	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z63	-	R1172N231D	LVR-IC	LDO, 2.3V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z63	eb	XC9110F631MR	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z64	-	R1172N241D	LVR-IC	LDO, 2.4V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z64	eb	XC9110F641MR	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z65	-	R1172N251D	LVR-IC	LDO, 2.5V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z65	eb	XC9110F651MR	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z66	-	R1172N261D	LVR-IC	LDO, 2.6V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z66	eb	XC9110F661MR	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z67	-	R1172N271D	LVR-IC	LDO, 2.7V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z67	eb	XC9110F671MR	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z68	-	R1172N281D	LVR-IC	LDO, 2.8V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Z68	eb	XC9110F681MR	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z69	-	R1172N291D	LVR-IC	LDO, 2.9V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z69	eb	XC9110F691MR	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z7	-	R1210N472D	DC-DC-IC	PWM step-up, 4.7V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Z7	-	RT9808-27CB	Vdet-IC	2.7V±2%, -ODO +Reset	SOT-23-5	28vdm	VD6	6a	Rct
Z7-	-	RT9808-27PB	Vdet-IC	2.7V±2%, -ODO +Reset	SOT-23-5	28vdm	VD6	6a	Rct
Z70	-	R1172N301D	LVR-IC	LDO, 3.0V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z70	eb	XC9110F701MR	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA	SOT-25	28sy	DC13	6g	Tor
Z71	-	R1172N311D	LVR-IC	LDO, 3.1V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z72	-	R1172N321D	LVR-IC	LDO, 3.2V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z73	-	R1172N331D	LVR-IC	LDO, 3.3V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z74	-	R1172N341D	LVR-IC	LDO, 3.4V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z75	-	R1172N351D	LVR-IC	LDO, 3.5V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z76	-	R1172N361D	LVR-IC	LDO, 3.6V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z77	-	R1172N371D	LVR-IC	LDO, 3.7V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z78	-	R1172N381D	LVR-IC	LDO, 3.8V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z79	-	R1172N391D	LVR-IC	LDO, 3.9V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z8	-	R1210N482D	DC-DC-IC	PWM step-up, 4.8V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Z8	-	RT9808-50CB	Vdet-IC	5.0V±2%, -ODO +Reset	SOT-23-5	28vdm	VD6	6a	Rct
Z80	-	R1172N401D	LVR-IC	LDO, 4.0V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z81	-	R1172N411D	LVR-IC	LDO, 4.1V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z82	-	R1172N421D	LVR-IC	LDO, 4.2V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z83	-	R1172N431D	LVR-IC	LDO, 4.3V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z84	-	R1172N441D	LVR-IC	LDO, 4.4V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z85	-	R1172N451D	LVR-IC	LDO, 4.5V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z86	-	R1172N461D	LVR-IC	LDO, 4.6V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z87	-	R1172N471D	LVR-IC	LDO, 4.7V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z88	-	R1172N481D	LVR-IC	LDO, 4.8V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z89	-	R1172N491D	LVR-IC	LDO, 4.9V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
Z9	-	R1210N492D	DC-DC-IC	PWM step-up, 4.9V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
Z9	-	RT9808-30CB	Vdet-IC	3.0V±2%, -ODO +Reset	SOT-23-5	28vdm	VD6	6a	Rct
Z90	-	R1172N501D	LVR-IC	LDO, 5.0V±2%, 1A, +CE, CL	SOT-23-5	28vrd	VR4	6g	Ric
ZA	-	µPA507TE	p-MOSFET+di	Switching, 20V, ±2A, 570mW, <85 mΩ(1A), 10/47ns	SOT-23-5	28	T22	6a	Nec
ZA	-	BU4233FWE	Vdet-IC	3.3V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
ZA	-	BU4233G	Vdet-IC	3.3V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ZA	-	R1210N502D	DC-DC-IC	PWM step-up, 5V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
ZB	-	µPA508TE	n-MOSFET+di	Switching, 20V, ±2A, 570mW, <51 mΩ(1A), 9/15ns	SOT-23-5	28	T23	6a	Nec
ZB	-	BU4234FWE	Vdet-IC	3.4V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
ZB	-	BU4234G	Vdet-IC	3.4V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ZB	-	R1210N512D	DC-DC-IC	PWM step-up, 5.1V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
ZB	-	RT9808-25CB	Vdet-IC	2.5V±2%, -ODO +Reset	SOT-23-5	28vdm	VD6	6a	Rct
ZC	-	BU4235FWE	Vdet-IC	3.5V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
ZC	-	BU4235G	Vdet-IC	3.5V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ZC	-	R1210N522D	DC-DC-IC	PWM step-up, 5.2V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
ZC-	-	RT9808-15PB	Vdet-IC	1.5V±2%, -ODO +Reset	SOT-23-5	28vdm	VD6	6a	Rct
ZD	-	BU4236FWE	Vdet-IC	3.6V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
ZD	-	BU4236G	Vdet-IC	3.6V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ZD	-	R1210N532D	DC-DC-IC	PWM step-up, 5.3V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
ZD-	-	RT9013-29PB	LVR-IC	LDO, 2.9V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
ZE	-	BU4237FWE	Vdet-IC	3.7V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
ZE	-	BU4237G	Vdet-IC	3.7V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ZE	-	R1210N542D	DC-DC-IC	PWM step-up, 5.4V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
ZF	-	BU4238FWE	Vdet-IC	3.8V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
ZF	-	BU4238G	Vdet-IC	3.8V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ZF	-	R1210N552D	DC-DC-IC	PWM step-up, 5.5V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
ZG	-	BU4239FWE	Vdet-IC	3.9V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
ZG	-	BU4239G	Vdet-IC	3.9V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ZG	-	R1210N562D	DC-DC-IC	PWM step-up, 5.6V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
ZG-	-	RT9193-50PB	LVR-IC	LDO, 5.0V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
ZH	-	BU4240FWE	Vdet-IC	4.0V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
ZH	-	BU4240G	Vdet-IC	4.0V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ZH	-	R1210N572D	DC-DC-IC	PWM step-up, 5.7V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
ZH-	-	RT9198-35PB	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
ZJ	-	BU4241FWE	Vdet-IC	4.1V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
ZJ	-	BU4241G	Vdet-IC	4.1V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ZJ	-	R1210N582D	DC-DC-IC	PWM step-up, 5.8V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
ZJ-	-	RT9198-4GPB	LVR-IC	LDO, 4.75V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
ZK	-	BU4242FWE	Vdet-IC	4.2V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
ZK	-	BU4242G	Vdet-IC	4.2V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ZK	-	R1210N592D	DC-DC-IC	PWM step-up, 5.9V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ZK-	-	RT9198-50PB	LVR-IC	LDO, 5.0V±1%, 300mA, +CE	SOT-23-5	28xm	VR4	6a	Rct
ZL	-	BU4243FWE	Vdet-IC	4.3V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
ZL	-	BU4243G	Vdet-IC	4.3V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ZL	-	R1210N602D	DC-DC-IC	PWM step-up, 6V, 180kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
ZL-	-	RT9818C-33PB	Vdet-IC	3.3V±1.5%, -Reset ODO, Td=220ms	SOT-23-5	28vdm	VD6	6a	Rct
ZM	-	BU4244FWE	Vdet-IC	4.4V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
ZM	-	BU4244G	Vdet-IC	4.4V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ZM-	-	RT9169H-15PB	LVR-IC	LDO, 5.0V±2%, 100mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
ZN	-	BU4245FWE	Vdet-IC	4.5V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
ZN	-	BU4245G	Vdet-IC	4.5V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ZP	-	BU4246FWE	Vdet-IC	4.6V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
ZP	-	BU4246G	Vdet-IC	4.6V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ZQ	-	BU4247FWE	Vdet-IC	4.7V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
ZQ	-	BU4247G	Vdet-IC	4.7V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ZR	-	74AHCT1G00SE	CMOS-Log	2-input NAND gate	SOT-353	28	Log1	6t	Di
ZR	-	74AHCT1G00W5	CMOS-Log	2-input NAND gate	SOT-25	28	Log1	6t	Di
ZR	-	BU4248FWE	Vdet-IC	4.8V±1%, -Reset ODO	VSOF-5	30vka	VD1	6e	Rhm
ZR	-	BU4248G	Vdet-IC	4.8V±1%, -Reset ODO	SSOP-5	28vdo	VD1	6c	Rhm
ZS	-	74AHCT1G02SE	CMOS-Log	2-input NOR gate	SOT-353	28	Log2	6t	Di
ZS	-	74AHCT1G02W5	CMOS-Log	2-input NOR gate	SOT-25	28	Log2	6t	Di
ZS	-	BU4309FWE	Vdet-IC	0.9V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
ZS	-	BU4309G	Vdet-IC	0.9V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
ZS-	-	RT9818A-24PB	Vdet-IC	2.4V±1.5%, -Reset ODO	SOT-23-5	28vdm	VD6	6a	Rct
ZT	-	74AHCT1G04SE	CMOS-Log	Inverter	SOT-353	28	Log6	6t	Di
ZT	-	74AHCT1G04W5	CMOS-Log	Inverter	SOT-25	28	Log6	6t	Di
ZT	-	BU4310FWE	Vdet-IC	1.0V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
ZT	-	BU4310G	Vdet-IC	1.0V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
ZU	-	74AHCT1G08SE	CMOS-Log	2-input AND gate	SOT-353	28	Log3	6t	Di
ZU	-	74AHCT1G08W5	CMOS-Log	2-input AND gate	SOT-25	28	Log3	6t	Di
ZU	-	BU4311FWE	Vdet-IC	1.1V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
ZU	-	BU4311G	Vdet-IC	1.1V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
ZU-	-	RT9013-13PB	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
ZV	-	74AHCT1G14SE	CMOS-Log	Inverting Schmitt-trigger	SOT-353	28	Log7	6t	Di
ZV	-	74AHCT1G14W5	CMOS-Log	Inverting Schmitt-trigger	SOT-25	28	Log7	6t	Di
ZV	-	BU4312FWE	Vdet-IC	1.2V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
ZV	-	BU4312G	Vdet-IC	1.2V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
ZW	-	74AHCT1G32SE	CMOS-Log	2-input OR gate	SOT-353	28	Log4	6t	Di
ZW	-	74AHCT1G32W5	CMOS-Log	2-input OR gate	SOT-25	28	Log4	6t	Di
ZW	-	BU4313FWE	Vdet-IC	1.3V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
ZW	-	BU4313G	Vdet-IC	1.3V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
ZW	-	R1210N602C	DC-DC-IC	PWM step-up, 6V, 100kHz, +CE, ext. transistor	SOT-23-5	28sd	DC6	6g	Ric
ZX	-	74AHCT1G86SE	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-353	28	Log5	6t	Di
ZX	-	74AHCT1G86W5	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT-25	28	Log5	6t	Di
ZX	-	BU4314FWE	Vdet-IC	1.4V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
ZX	-	BU4314G	Vdet-IC	1.4V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
ZX-	-	RT9193-16PB	LVR-IC	LDO, 1.6V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
ZX=	-	RT9193-16GB	LVR-IC	LDO, 1.6V±1%, 300mA, +CE	SOT-23-5	28vrx	VR7	6g	Rct
ZY	-	74AHCT1G125SE	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log14	6t	Di
ZY	-	74AHCT1G125W5	CMOS-Log	Bus buffer gate with 3-state output	SOT-25	28	Log14	6t	Di
ZY	-	BU4315FWE	Vdet-IC	1.5V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
ZY	-	BU4315G	Vdet-IC	1.5V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm
ZY-	-	RT9013-16PB	LVR-IC	LDO, 1.6V±2%, 500mA, +CE	SOT-23-5	28cx	VR4	6g	Rct
ZZ	-	74AHCT1G126SE	CMOS-Log	Bus buffer gate with 3-state output	SOT-353	28	Log13	6t	Di
ZZ	-	74AHCT1G126W5	CMOS-Log	Bus buffer gate with 3-state output	SOT-25	28	Log13	6t	Di
ZZ	-	BU4316FWE	Vdet-IC	1.6V±1%, -Reset PPO	VSOF-5	30vka	VD3	6e	Rhm
ZZ	-	BU4316G	Vdet-IC	1.6V±1%, -Reset PPO	SSOP-5	28vdo	VD3	6c	Rhm

SECTION 8

SOT-89-5 case SMD semiconductor components



0
1
2
3
4
5
6
7
8
9
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
00E	-	XC6505A151PR	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
00F	-	XC6505A161PR	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
00H	-	XC6505A171PR	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
00K	-	XC6505A181PR	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
00L	-	XC6505A191PR	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
00M	-	XC6505A201PR	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
00N	-	XC6505A211PR	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
00P	-	XC6505A221PR	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
00R	-	XC6505A231PR	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
00S	-	XC6505A241PR	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
00T	-	XC6505A251PR	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
00U	-	XC6505A261PR	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
00V	-	XC6505A271PR	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
00X	-	XC6505A281PR	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
00Y	-	XC6505A291PR	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
00Z	-	XC6505A301PR	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
010	-	XC6505A311PR	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
011	-	XC6505A321PR	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
012	-	XC6505A331PR	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
013	-	XC6505A341PR	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
014	-	XC6505A351PR	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
015	-	XC6505A361PR	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
016	-	XC6505A371PR	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
017	-	XC6505A381PR	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
018	-	XC6505A391PR	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
019	-	XC6505A401PR	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
01A	-	XC6505A411PR	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
01B	-	XC6505A421PR	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
01C	-	XC6505A431PR	LVR-IC	LDO, 4.3V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
01D	-	XC6505A441PR	LVR-IC	LDO, 4.4V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
01E	-	XC6505A451PR	LVR-IC	LDO, 4.5V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
01F	-	XC6505A461PR	LVR-IC	LDO, 4.6V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
01H	-	XC6505A471PR	LVR-IC	LDO, 4.7V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
01K	-	XC6505A481PR	LVR-IC	LDO, 4.8V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
01L	-	XC6505A491PR	LVR-IC	LDO, 4.9V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
01M	-	XC6505A501PR	LVR-IC	LDO, 5.0V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
020	-	ELM85103A	LVR-IC	LDO, 1.0V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
020	-	XC6505A611PR	LVR-IC	LDO, 6.1V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
021	-	XC6505A621PR	LVR-IC	LDO, 6.2V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
022	-	XC6505A631PR	LVR-IC	LDO, 6.3V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
023	-	XC6505A641PR	LVR-IC	LDO, 6.4V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
024	-	XC6505A651PR	LVR-IC	LDO, 6.5V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
025	-	XC6505A661PR	LVR-IC	LDO, 6.6V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
026	-	XC6505A671PR	LVR-IC	LDO, 6.7V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
027	-	XC6505A681PR	LVR-IC	LDO, 6.8V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
028	-	ELM85083A	LVR-IC	LDO, 0.8V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
028	-	XC6505A691PR	LVR-IC	LDO, 6.9V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
029	-	ELM85093A	LVR-IC	LDO, 0.9±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
029	-	XC6505A701PR	LVR-IC	LDO, 7.0V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
02A	-	ELM85113A	LVR-IC	LDO, 1.1V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02B	-	ELM85123A	LVR-IC	LDO, 1.2V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02C	-	ELM85133A	LVR-IC	LDO, 1.3V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02D	-	ELM85143A	LVR-IC	LDO, 1.4V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02E	-	ELM85153A	LVR-IC	LDO, 1.5V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02F	-	ELM85163A	LVR-IC	LDO, 1.6V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02G	-	ELM85173A	LVR-IC	LDO, 1.7V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02H	-	ELM85183A	LVR-IC	LDO, 1.8V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02J	-	ELM85193A	LVR-IC	LDO, 1.9V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02K	-	ELM85203A	LVR-IC	LDO, 2.0V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02L	-	ELM85213A	LVR-IC	LDO, 2.1V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02M	-	ELM85223A	LVR-IC	LDO, 2.2V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02N	-	ELM85233A	LVR-IC	LDO, 2.3V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02N	-	XC6505A511PR	LVR-IC	LDO, 5.1V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
02P	-	ELM85243A	LVR-IC	LDO, 2.4V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02P	-	XC6505A521PR	LVR-IC	LDO, 5.2V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
02Q	-	ELM85253A	LVR-IC	LDO, 2.5V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02R	-	ELM85263A	LVR-IC	LDO, 2.6V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02R	-	XC6505A531PR	LVR-IC	LDO, 5.3V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
02S	-	ELM85273A	LVR-IC	LDO, 2.7V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02S	-	XC6505A541PR	LVR-IC	LDO, 5.4V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
02T	-	ELM85283A	LVR-IC	LDO, 2.8V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02T	-	XC6505A551PR	LVR-IC	LDO, 5.5V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
02U	-	ELM85293A	LVR-IC	LDO, 2.9V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02U	-	XC6505A561PR	LVR-IC	LDO, 5.6V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
02V	-	ELM85303A	LVR-IC	LDO, 3.0V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
02V	-	XC6505A571PR	LVR-IC	LDO, 5.7V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
02X	-	XC6505A581PR	LVR-IC	LDO, 5.8V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
02Y	-	XC6505A591PR	LVR-IC	LDO, 5.9V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
02Z	-	XC6505A601PR	LVR-IC	LDO, 6.0V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
030	-	ELM85403A	LVR-IC	LDO, 4.0V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
031	-	ELM85313A	LVR-IC	LDO, 3.1V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
032	-	ELM85323A	LVR-IC	LDO, 3.2V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
033	-	ELM85333A	LVR-IC	LDO, 3.3V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
034	-	ELM85343A	LVR-IC	LDO, 3.4V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
035	-	ELM85353A	LVR-IC	LDO, 3.5V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
036	-	ELM85363A	LVR-IC	LDO, 3.6V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
037	-	ELM85373A	LVR-IC	LDO, 3.7V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
038	-	ELM85383A	LVR-IC	LDO, 3.8V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
039	-	ELM85393A	LVR-IC	LDO, 3.9V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
03A	-	ELM85413A	LVR-IC	LDO, 4.1V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
03A	-	XC6505A711PR	LVR-IC	LDO, 7.1V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
03B	-	ELM85423A	LVR-IC	LDO, 4.2V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
03B	-	XC6505A721PR	LVR-IC	LDO, 7.2V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
03C	-	ELM85433A	LVR-IC	LDO, 4.3V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
03C	-	XC6505A731PR	LVR-IC	LDO, 7.3V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
03D	-	ELM85443A	LVR-IC	LDO, 4.4V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
03D	-	XC6505A741PR	LVR-IC	LDO, 7.4V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
03E	-	ELM85453A	LVR-IC	LDO, 4.5V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
03E	-	XC6505A751PR	LVR-IC	LDO, 7.5V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
03F	-	ELM85463A	LVR-IC	LDO, 4.6V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
03F	-	XC6505A761PR	LVR-IC	LDO, 7.6V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
03G	-	ELM85473A	LVR-IC	LDO, 4.7V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
03H	-	ELM85483A	LVR-IC	LDO, 4.8V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
03H	-	XC6505A771PR	LVR-IC	LDO, 7.7V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
03J	-	ELM85493A	LVR-IC	LDO, 4.9V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
03K	-	ELM85503A	LVR-IC	LDO, 5.0V±2%, 800mA, +CE	SOT-89-5	32vrt	VR4	6h	Elm
03K	-	XC6505A781PR	LVR-IC	LDO, 7.8V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
03L	-	XC6505A791PR	LVR-IC	LDO, 7.9V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
03M	-	XC6505A801PR	LVR-IC	LDO, 8.0V±1%, 200mA, +CE	SOT-89-5	32um	VR4	6n	Tor
04E	-	XC6505C151PR	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
04F	-	XC6505C161PR	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
04H	-	XC6505C171PR	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
04K	-	XC6505C181PR	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
04L	-	XC6505C191PR	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
04M	-	XC6505C201PR	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
04N	-	XC6505C211PR	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
04P	-	XC6505C221PR	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
04R	-	XC6505C231PR	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
04S	-	XC6505C241PR	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
04T	-	XC6505C251PR	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
04U	-	XC6505C261PR	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
04V	-	XC6505C271PR	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
04X	-	XC6505C281PR	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
04Y	-	XC6505C291PR	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
04Z	-	XC6505C301PR	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
050	-	XC6505C311PR	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
051	-	XC6505C321PR	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
052	-	XC6505C331PR	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
053	-	XC6505C341PR	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
054	-	XC6505C351PR	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
055	-	XC6505C361PR	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
056	-	XC6505C371PR	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
057	-	XC6505C381PR	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
058	-	XC6505C391PR	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
059	-	XC6505C401PR	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
05A	-	XC6505C411PR	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
05B	-	XC6505C421PR	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
05C	-	XC6505C431PR	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
05D	-	XC6505C441PR	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
05E	-	XC6505C451PR	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
05F	-	XC6505C461PR	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
05H	-	XC6505C471PR	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
05K	-	XC6505C481PR	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
05L	-	XC6505C491PR	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
05M	-	XC6505C501PR	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
060	-	XC6505C611PR	LVR-IC	LDO, 6.1V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
061	-	XC6505C621PR	LVR-IC	LDO, 6.2V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
062	-	XC6505C631PR	LVR-IC	LDO, 6.3V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
063	-	XC6505C641PR	LVR-IC	LDO, 6.4V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
064	-	XC6505C651PR	LVR-IC	LDO, 6.5V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
065	-	XC6505C661PR	LVR-IC	LDO, 6.6V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
066	-	XC6505C671PR	LVR-IC	LDO, 6.7V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
067	-	XC6505C681PR	LVR-IC	LDO, 6.8V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
068	-	XC6505C691PR	LVR-IC	LDO, 6.9V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
069	-	XC6505C701PR	LVR-IC	LDO, 7.0V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
06N	-	XC6505C511PR	LVR-IC	LDO, 5.1V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
06P	-	XC6505C521PR	LVR-IC	LDO, 5.2V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
06R	-	XC6505C531PR	LVR-IC	LDO, 5.3V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
06S	-	XC6505C541PR	LVR-IC	LDO, 5.4V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
06T	-	XC6505C551PR	LVR-IC	LDO, 5.5V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
06U	-	XC6505C561PR	LVR-IC	LDO, 5.6V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
06V	-	XC6505C571PR	LVR-IC	LDO, 5.7V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
06X	-	XC6505C581PR	LVR-IC	LDO, 5.8V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
06Y	-	XC6505C591PR	LVR-IC	LDO, 5.9V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
06Z	-	XC6505C601PR	LVR-IC	LDO, 6.0V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
07A	-	XC6505C711PR	LVR-IC	LDO, 7.1V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
07B	-	XC6505C721PR	LVR-IC	LDO, 7.2V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
07C	-	XC6505C731PR	LVR-IC	LDO, 7.3V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
07D	-	XC6505C741PR	LVR-IC	LDO, 7.4V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
07E	-	XC6505C751PR	LVR-IC	LDO, 7.5V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
07F	-	XC6505C761PR	LVR-IC	LDO, 7.6V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
07H	-	XC6505C771PR	LVR-IC	LDO, 7.7V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
07K	-	XC6505C781PR	LVR-IC	LDO, 7.8V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
07L	-	XC6505C791PR	LVR-IC	LDO, 7.9V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
07M	-	XC6505C801PR	LVR-IC	LDO, 8.0V±1%, 200mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
0A0	-	LN6210A312P	LVR-IC	LDO, 3.1V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0A0	-	XC6210A312PR	LVR-IC	LDO, 3.1V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0A1	-	LN6210A322P	LVR-IC	LDO, 3.2V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0A1	-	XC6210A322PR	LVR-IC	LDO, 3.2V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0A2	-	LN6210A332P	LVR-IC	LDO, 3.3V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0A2	-	XC6210A332PR	LVR-IC	LDO, 3.3V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0A3	-	LN6210A342P	LVR-IC	LDO, 3.4V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0A3	-	XC6210A342PR	LVR-IC	LDO, 3.4V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0A4	-	LN6210A352P	LVR-IC	LDO, 3.5V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0A4	-	XC6210A352PR	LVR-IC	LDO, 3.5V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0A5	-	LN6210A362P	LVR-IC	LDO, 3.6V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0A5	-	XC6210A362PR	LVR-IC	LDO, 3.6V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0A6	-	LN6210A372P	LVR-IC	LDO, 3.7V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0A6	-	XC6210A372PR	LVR-IC	LDO, 3.7V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0A7	-	LN6210A382P	LVR-IC	LDO, 3.8V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0A7	-	XC6210A382PR	LVR-IC	LDO, 3.8V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0A8	-	LN6210A392P	LVR-IC	LDO, 3.9V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0A8	-	XC6210A392PR	LVR-IC	LDO, 3.9V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0A9	-	LN6210A402P	LVR-IC	LDO, 4.0V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0A9	-	XC6210A402PR	LVR-IC	LDO, 4.0V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0AA	-	LN6210A412P	LVR-IC	LDO, 4.1V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0AA	-	XC6210A412PR	LVR-IC	LDO, 4.1V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0AB	-	LN6210A422P	LVR-IC	LDO, 4.2V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0AB	-	XC6210A422PR	LVR-IC	LDO, 4.2V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0AC	-	LN6210A432P	LVR-IC	LDO, 4.3V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0AC	-	XC6210A432PR	LVR-IC	LDO, 4.3V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0AD	-	LN6210A442P	LVR-IC	LDO, 4.4V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0AD	-	XC6210A442PR	LVR-IC	LDO, 4.4V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0AE	-	LN6210A452P	LVR-IC	LDO, 4.5V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0AE	-	XC6210A452PR	LVR-IC	LDO, 4.5V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0AF	-	LN6210A462P	LVR-IC	LDO, 4.6V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0AF	-	XC6210A462PR	LVR-IC	LDO, 4.6V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0AH	-	LN6210A472P	LVR-IC	LDO, 4.7V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0AH	-	XC6210A472PR	LVR-IC	LDO, 4.7V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0AK	-	LN6210A482P	LVR-IC	LDO, 4.8V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0AK	-	XC6210A482PR	LVR-IC	LDO, 4.8V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0AL	-	LN6210A492P	LVR-IC	LDO, 4.9V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0AL	-	XC6210A492PR	LVR-IC	LDO, 4.9V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0AM	-	LN6210A502P	LVR-IC	LDO, 5.0V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0AM	-	XC6210A502PR	LVR-IC	LDO, 5.0V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0B0	-	LN6210B312P	LVR-IC	LDO, 3.1V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0B0	-	XC6210B312PR	LVR-IC	LDO, 3.1V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0B1	-	LN6210B322P	LVR-IC	LDO, 3.2V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0B1	-	XC6210B322PR	LVR-IC	LDO, 3.2V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0B2	-	LN6210B332P	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0B2	-	XC6210B332PR	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0B3	-	LN6210B342P	LVR-IC	LDO, 3.4V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0B3	-	XC6210B342PR	LVR-IC	LDO, 3.4V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0B4	-	LN6210B352P	LVR-IC	LDO, 3.5V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0B4	-	XC6210B352PR	LVR-IC	LDO, 3.5V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0B5	-	LN6210B362P	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0B5	-	XC6210B362PR	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0B6	-	LN6210B372P	LVR-IC	LDO, 3.7V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0B6	-	XC6210B372PR	LVR-IC	LDO, 3.7V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0B7	-	LN6210B382P	LVR-IC	LDO, 3.8V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0B7	-	XC6210B382PR	LVR-IC	LDO, 3.8V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0B8	-	LN6210B392P	LVR-IC	LDO, 3.9V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0B8	-	XC6210B392PR	LVR-IC	LDO, 3.9V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0B9	-	LN6210B402P	LVR-IC	LDO, 4.0V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0B9	-	XC6210B402PR	LVR-IC	LDO, 4.0V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0BA	-	LN6210B412P	LVR-IC	LDO, 4.1V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0BA	-	XC6210B412PR	LVR-IC	LDO, 4.1V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0BB	-	LN6210B422P	LVR-IC	LDO, 4.2V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0BB	-	XC6210B422PR	LVR-IC	LDO, 4.2V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0BC	-	LN6210B432P	LVR-IC	LDO, 4.3V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0BC	-	XC6210B432PR	LVR-IC	LDO, 4.3V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0BD	-	LN6210B442P	LVR-IC	LDO, 4.4V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0BD	-	XC6210B442PR	LVR-IC	LDO, 4.4V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0BE	-	LN6210B452P	LVR-IC	LDO, 4.5V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0BE	-	XC6210B452PR	LVR-IC	LDO, 4.5V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0BF	-	LN6210B462P	LVR-IC	LDO, 4.6V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0BF	-	XC6210B462PR	LVR-IC	LDO, 4.6V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0BH	-	LN6210B472P	LVR-IC	LDO, 4.7V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0BH	-	XC6210B472PR	LVR-IC	LDO, 4.7V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0BK	-	LN6210B482P	LVR-IC	LDO, 4.8V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0BK	-	XC6210B482PR	LVR-IC	LDO, 4.8V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0BL	-	LN6210B492P	LVR-IC	LDO, 4.9V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0BL	-	XC6210B492PR	LVR-IC	LDO, 4.9V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0BM	-	LN6210B502P	LVR-IC	LDO, 5.0V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0BM	-	XC6210B502PR	LVR-IC	LDO, 5.0V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0C0	-	LN6210C312P	LVR-IC	LDO, 3.1V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0C0	-	XC6210C312PR	LVR-IC	LDO, 3.1V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0C1	-	LN6210C322P	LVR-IC	LDO, 3.2V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0C1	-	XC6210C322PR	LVR-IC	LDO, 3.2V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0C2	-	LN6210C332P	LVR-IC	LDO, 3.3V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0C2	-	XC6210C332PR	LVR-IC	LDO, 3.3V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0C3	-	LN6210C342P	LVR-IC	LDO, 3.4V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0C3	-	XC6210C342PR	LVR-IC	LDO, 3.4V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0C4	-	LN6210C352P	LVR-IC	LDO, 3.5V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0C4	-	XC6210C352PR	LVR-IC	LDO, 3.5V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0C5	-	LN6210C362P	LVR-IC	LDO, 3.6V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0C5	-	XC6210C362PR	LVR-IC	LDO, 3.6V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0C6	-	LN6210C372P	LVR-IC	LDO, 3.7V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0C6	-	XC6210C372PR	LVR-IC	LDO, 3.7V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0C7	-	LN6210C382P	LVR-IC	LDO, 3.8V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0C7	-	XC6210C382PR	LVR-IC	LDO, 3.8V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0C8	-	LN6210C392P	LVR-IC	LDO, 3.9V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0C8	-	XC6210C392PR	LVR-IC	LDO, 3.9V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0C9	-	LN6210C402P	LVR-IC	LDO, 4.0V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0C9	-	XC6210C402PR	LVR-IC	LDO, 4.0V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0CA	-	LN6210C412P	LVR-IC	LDO, 4.1V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0CA	-	XC6210C412PR	LVR-IC	LDO, 4.1V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0CB	-	LN6210C422P	LVR-IC	LDO, 4.2V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0CB	-	XC6210C422PR	LVR-IC	LDO, 4.2V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0CC	-	LN6210C432P	LVR-IC	LDO, 4.3V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0CC	-	XC6210C432PR	LVR-IC	LDO, 4.3V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0CD	-	LN6210C442P	LVR-IC	LDO, 4.4V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0CD	-	XC6210C442PR	LVR-IC	LDO, 4.4V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0CE	-	LN6210C452P	LVR-IC	LDO, 4.5V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0CE	-	XC6210C452PR	LVR-IC	LDO, 4.5V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0CF	-	LN6210C462P	LVR-IC	LDO, 4.6V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0CF	-	XC6210C462PR	LVR-IC	LDO, 4.6V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0CH	-	LN6210C472P	LVR-IC	LDO, 4.7V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0CH	-	XC6210C472PR	LVR-IC	LDO, 4.7V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0CK	-	LN6210C482P	LVR-IC	LDO, 4.8V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0CK	-	XC6210C482PR	LVR-IC	LDO, 4.8V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0CL	-	LN6210C492P	LVR-IC	LDO, 4.9V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0CL	-	XC6210C492PR	LVR-IC	LDO, 4.9V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0CM	-	LN6210C502P	LVR-IC	LDO, 5.0V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0CM	-	XC6210C502PR	LVR-IC	LDO, 5.0V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0D0	-	LN6210D312P	LVR-IC	LDO, 3.1V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0D0	-	XC6210D312PR	LVR-IC	LDO, 3.1V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0D1	-	LN6210D322P	LVR-IC	LDO, 3.2V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0D1	-	XC6210D322PR	LVR-IC	LDO, 3.2V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0D2	-	LN6210D332P	LVR-IC	LDO, 3.3V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0D2	-	XC6210D332PR	LVR-IC	LDO, 3.3V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0D3	-	LN6210D342P	LVR-IC	LDO, 3.4V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0D3	-	XC6210D342PR	LVR-IC	LDO, 3.4V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0D4	-	LN6210D352P	LVR-IC	LDO, 3.5V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0D4	-	XC6210D352PR	LVR-IC	LDO, 3.5V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0D5	-	LN6210D362P	LVR-IC	LDO, 3.6V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0D5	-	XC6210D362PR	LVR-IC	LDO, 3.6V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0D6	-	LN6210D372P	LVR-IC	LDO, 3.7V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0D6	-	XC6210D372PR	LVR-IC	LDO, 3.7V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0D7	-	LN6210D382P	LVR-IC	LDO, 3.8V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0D7	-	XC6210D382PR	LVR-IC	LDO, 3.8V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0D8	-	LN6210D392P	LVR-IC	LDO, 3.9V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0D8	-	XC6210D392PR	LVR-IC	LDO, 3.9V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0D9	-	LN6210D402P	LVR-IC	LDO, 4.0V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0D9	-	XC6210D402PR	LVR-IC	LDO, 4.0V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0DA	-	LN6210D412P	LVR-IC	LDO, 4.1V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0DA	-	XC6210D412PR	LVR-IC	LDO, 4.1V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0DB	-	LN6210D422P	LVR-IC	LDO, 4.2V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0DB	-	XC6210D422PR	LVR-IC	LDO, 4.2V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0DC	-	LN6210D432P	LVR-IC	LDO, 4.3V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0DC	-	XC6210D432PR	LVR-IC	LDO, 4.3V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0DD	-	LN6210D442P	LVR-IC	LDO, 4.4V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0DD	-	XC6210D442PR	LVR-IC	LDO, 4.4V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0DE	-	LN6210D452P	LVR-IC	LDO, 4.5V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0DE	-	XC6210D452PR	LVR-IC	LDO, 4.5V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0DF	-	LN6210D462P	LVR-IC	LDO, 4.6V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0DF	-	XC6210D462PR	LVR-IC	LDO, 4.6V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0DH	-	LN6210D472P	LVR-IC	LDO, 4.7V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0DH	-	XC6210D472PR	LVR-IC	LDO, 4.7V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0DK	-	LN6210D482P	LVR-IC	LDO, 4.8V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0DK	-	XC6210D482PR	LVR-IC	LDO, 4.8V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0DL	-	LN6210D492P	LVR-IC	LDO, 4.9V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0DL	-	XC6210D492PR	LVR-IC	LDO, 4.9V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0DM	-	LN6210D502P	LVR-IC	LDO, 5.0V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0DM	-	XC6210D502PR	LVR-IC	LDO, 5.0V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0E8	-	XC6210A08APR	LVR-IC	LDO, 0.85V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0E9	-	XC6210A09APR	LVR-IC	LDO, 0.95V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0EA	-	XC6210A11APR	LVR-IC	LDO, 1.15V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0EB	-	XC6210A12APR	LVR-IC	LDO, 1.25V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0EC	-	XC6210A13APR	LVR-IC	LDO, 1.35V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0ED	-	XC6210A14APR	LVR-IC	LDO, 1.45V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0EE	-	LN6210A15AP	LVR-IC	LDO, 1.55V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0EE	-	XC6210A15APR	LVR-IC	LDO, 1.55V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0EF	-	LN6210A16AP	LVR-IC	LDO, 1.65V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0EF	-	XC6210A16APR	LVR-IC	LDO, 1.65V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0EH	-	LN6210A17AP	LVR-IC	LDO, 1.75V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0EH	-	XC6210A17APR	LVR-IC	LDO, 1.75V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0EK	-	LN6210A18AP	LVR-IC	LDO, 1.85V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0EK	-	XC6210A18APR	LVR-IC	LDO, 1.85V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0EL	-	LN6210A19AP	LVR-IC	LDO, 1.95V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0EL	-	XC6210A19APR	LVR-IC	LDO, 1.95V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0EM	-	LN6210A20AP	LVR-IC	LDO, 2.05V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0EM	-	XC6210A20APR	LVR-IC	LDO, 2.05V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0EN	-	LN6210A21AP	LVR-IC	LDO, 2.15V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0EN	-	XC6210A21APR	LVR-IC	LDO, 2.15V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0EP	-	LN6210A22AP	LVR-IC	LDO, 2.25V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0EP	-	XC6210A22APR	LVR-IC	LDO, 2.25V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0ER	-	LN6210A23AP	LVR-IC	LDO, 2.35V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0ER	-	XC6210A23APR	LVR-IC	LDO, 2.35V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0ES	-	LN6210A24AP	LVR-IC	LDO, 2.45V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0ES	-	XC6210A24APR	LVR-IC	LDO, 2.45V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0ET	-	LN6210A25AP	LVR-IC	LDO, 2.55V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0ET	-	XC6210A25APR	LVR-IC	LDO, 2.55V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0EU	-	LN6210A26AP	LVR-IC	LDO, 2.65V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0EU	-	XC6210A26APR	LVR-IC	LDO, 2.65V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0EV	-	LN6210A27AP	LVR-IC	LDO, 2.75V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0EV	-	XC6210A27APR	LVR-IC	LDO, 2.75V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0EX	-	LN6210A28AP	LVR-IC	LDO, 2.85V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0EX	-	XC6210A28APR	LVR-IC	LDO, 2.85V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0EY	-	LN6210A29AP	LVR-IC	LDO, 2.95V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0EY	-	XC6210A29APR	LVR-IC	LDO, 2.95V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0EZ	-	LN6210A30AP	LVR-IC	LDO, 3.05V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0EZ	-	XC6210A30APR	LVR-IC	LDO, 3.05V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0F8	-	XC6210B08APR	LVR-IC	LDO, 0.85V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0F9	-	XC6210B09APR	LVR-IC	LDO, 0.95V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FA	-	XC6210B11APR	LVR-IC	LDO, 1.15V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FB	-	XC6210B12APR	LVR-IC	LDO, 1.25V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FC	-	XC6210B13APR	LVR-IC	LDO, 1.35V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FD	-	XC6210B14APR	LVR-IC	LDO, 1.45V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FE	-	LN6210B15AP	LVR-IC	LDO, 1.55V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0FE	-	XC6210B15APR	LVR-IC	LDO, 1.55V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FF	-	LN6210B16AP	LVR-IC	LDO, 1.65V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0FF	-	XC6210B16APR	LVR-IC	LDO, 1.65V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FH	-	LN6210B17AP	LVR-IC	LDO, 1.75V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0FH	-	XC6210B17APR	LVR-IC	LDO, 1.75V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FK	-	LN6210B18AP	LVR-IC	LDO, 1.85V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0FK	-	XC6210B18APR	LVR-IC	LDO, 1.85V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FL	-	LN6210B19AP	LVR-IC	LDO, 1.95V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0FL	-	XC6210B19APR	LVR-IC	LDO, 1.95V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FM	-	LN6210B20AP	LVR-IC	LDO, 2.05V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0FM	-	XC6210B20APR	LVR-IC	LDO, 2.05V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FN	-	LN6210B21AP	LVR-IC	LDO, 2.15V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0FN	-	XC6210B21APR	LVR-IC	LDO, 2.15V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FP	-	LN6210B22AP	LVR-IC	LDO, 2.25V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0FP	-	XC6210B22APR	LVR-IC	LDO, 2.25V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FR	-	LN6210B23AP	LVR-IC	LDO, 2.35V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0FR	-	XC6210B23APR	LVR-IC	LDO, 2.35V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FS	-	LN6210B24AP	LVR-IC	LDO, 2.45V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0FS	-	XC6210B24APR	LVR-IC	LDO, 2.45V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FT	-	LN6210B25AP	LVR-IC	LDO, 2.55V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0FT	-	XC6210B25APR	LVR-IC	LDO, 2.55V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FU	-	LN6210B26AP	LVR-IC	LDO, 2.65V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0FU	-	XC6210B26APR	LVR-IC	LDO, 2.65V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FV	-	LN6210B27AP	LVR-IC	LDO, 2.75V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0FV	-	XC6210B27APR	LVR-IC	LDO, 2.75V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FX	-	LN6210B28AP	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0FX	-	XC6210B28APR	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FY	-	LN6210B29AP	LVR-IC	LDO, 2.95V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0FY	-	XC6210B29APR	LVR-IC	LDO, 2.95V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0FZ	-	LN6210B30AP	LVR-IC	LDO, 3.05V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0FZ	-	XC6210B30APR	LVR-IC	LDO, 3.05V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0H8	-	XC6210C08APR	LVR-IC	LDO, 0.85V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0H9	-	XC6210C09APR	LVR-IC	LDO, 0.95V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HA	-	XC6210C11APR	LVR-IC	LDO, 1.15V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HB	-	XC6210C12APR	LVR-IC	LDO, 1.25V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HC	-	XC6210C13APR	LVR-IC	LDO, 1.35V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HD	-	XC6210C14APR	LVR-IC	LDO, 1.45V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HE	-	LN6210C15AP	LVR-IC	LDO, 1.55V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0HE	-	XC6210C15APR	LVR-IC	LDO, 1.55V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HF	-	LN6210C16AP	LVR-IC	LDO, 1.65V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0HF	-	XC6210C16APR	LVR-IC	LDO, 1.65V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HH	-	LN6210C17AP	LVR-IC	LDO, 1.75V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0HH	-	XC6210C17APR	LVR-IC	LDO, 1.75V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HK	-	LN6210C18AP	LVR-IC	LDO, 1.85V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0HK	-	XC6210C18APR	LVR-IC	LDO, 1.85V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HL	-	LN6210C19AP	LVR-IC	LDO, 1.95V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0HL	-	XC6210C19APR	LVR-IC	LDO, 1.95V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HM	-	LN6210C20AP	LVR-IC	LDO, 2.05V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0HM	-	XC6210C20APR	LVR-IC	LDO, 2.05V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HN	-	LN6210C21AP	LVR-IC	LDO, 2.15V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0HN	-	XC6210C21APR	LVR-IC	LDO, 2.15V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HP	-	LN6210C22AP	LVR-IC	LDO, 2.25V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0HP	-	XC6210C22APR	LVR-IC	LDO, 2.25V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HR	-	LN6210C23AP	LVR-IC	LDO, 2.35V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0HR	-	XC6210C23APR	LVR-IC	LDO, 2.35V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HS	-	LN6210C24AP	LVR-IC	LDO, 2.45V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0HS	-	XC6210C24APR	LVR-IC	LDO, 2.45V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HT	-	LN6210C25AP	LVR-IC	LDO, 2.55V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0HT	-	XC6210C25APR	LVR-IC	LDO, 2.55V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HU	-	LN6210C26AP	LVR-IC	LDO, 2.65V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0HU	-	XC6210C26APR	LVR-IC	LDO, 2.65V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HV	-	LN6210C27AP	LVR-IC	LDO, 2.75V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0HV	-	XC6210C27APR	LVR-IC	LDO, 2.75V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HX	-	LN6210C28AP	LVR-IC	LDO, 2.85V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0HX	-	XC6210C28APR	LVR-IC	LDO, 2.85V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HY	-	LN6210C29AP	LVR-IC	LDO, 2.95V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0HY	-	XC6210C29APR	LVR-IC	LDO, 2.95V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0HZ	-	LN6210C30AP	LVR-IC	LDO, 3.05V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0HZ	-	XC6210C30APR	LVR-IC	LDO, 3.05V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0K8	-	XC6210D08APR	LVR-IC	LDO, 0.85V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0K9	-	XC6210D09APR	LVR-IC	LDO, 0.95V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KA	-	XC6210D11APR	LVR-IC	LDO, 1.15V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KB	-	XC6210D12APR	LVR-IC	LDO, 1.25V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KC	-	XC6210D13APR	LVR-IC	LDO, 1.35V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KD	-	XC6210D14APR	LVR-IC	LDO, 1.45V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KE	-	LN6210D15AP	LVR-IC	LDO, 1.55V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0KE	-	XC6210D15APR	LVR-IC	LDO, 1.55V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KF	-	LN6210D16AP	LVR-IC	LDO, 1.65V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0KF	-	XC6210D16APR	LVR-IC	LDO, 1.65V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KH	-	LN6210D17AP	LVR-IC	LDO, 1.75V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0KH	-	XC6210D17APR	LVR-IC	LDO, 1.75V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KK	-	LN6210D18AP	LVR-IC	LDO, 1.85V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0KK	-	XC6210D18APR	LVR-IC	LDO, 1.85V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KL	-	LN6210D19AP	LVR-IC	LDO, 1.95V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0KL	-	XC6210D19APR	LVR-IC	LDO, 1.95V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KM	-	LN6210D20AP	LVR-IC	LDO, 2.05V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0KM	-	XC6210D20APR	LVR-IC	LDO, 2.05V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KN	-	LN6210D21AP	LVR-IC	LDO, 2.15V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0KN	-	XC6210D21APR	LVR-IC	LDO, 2.15V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KP	-	LN6210D22AP	LVR-IC	LDO, 2.25V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0KP	-	XC6210D22APR	LVR-IC	LDO, 2.25V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KR	-	LN6210D23AP	LVR-IC	LDO, 2.35V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0KR	-	XC6210D23APR	LVR-IC	LDO, 2.35V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KS	-	LN6210D24AP	LVR-IC	LDO, 2.45V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0KS	-	XC6210D24APR	LVR-IC	LDO, 2.45V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KT	-	LN6210D25AP	LVR-IC	LDO, 2.55V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0KT	-	XC6210D25APR	LVR-IC	LDO, 2.55V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KU	-	LN6210D26AP	LVR-IC	LDO, 2.65V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0KU	-	XC6210D26APR	LVR-IC	LDO, 2.65V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KV	-	LN6210D27AP	LVR-IC	LDO, 2.75V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0KV	-	XC6210D27APR	LVR-IC	LDO, 2.75V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KX	-	LN6210D28AP	LVR-IC	LDO, 2.85V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0KX	-	XC6210D28APR	LVR-IC	LDO, 2.85V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KY	-	LN6210D29AP	LVR-IC	LDO, 2.95V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0KY	-	XC6210D29APR	LVR-IC	LDO, 2.95V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0KZ	-	LN6210D30AP	LVR-IC	LDO, 3.05V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0KZ	-	XC6210D30APR	LVR-IC	LDO, 3.05V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0L0	-	LN6210A31AP	LVR-IC	LDO, 3.15V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0L0	-	XC6210A31APR	LVR-IC	LDO, 3.15V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0L1	-	LN6210A32AP	LVR-IC	LDO, 3.25V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0L1	-	XC6210A32APR	LVR-IC	LDO, 3.25V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0L2	-	LN6210A33AP	LVR-IC	LDO, 3.35V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0L2	-	XC6210A33APR	LVR-IC	LDO, 3.35V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0L3	-	LN6210A34AP	LVR-IC	LDO, 3.45V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0L3	-	XC6210A34APR	LVR-IC	LDO, 3.45V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0L4	-	LN6210A35AP	LVR-IC	LDO, 3.55V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0L4	-	XC6210A35APR	LVR-IC	LDO, 3.55V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0L5	-	LN6210A36AP	LVR-IC	LDO, 3.65V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0L5	-	XC6210A36APR	LVR-IC	LDO, 3.65V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0L6	-	LN6210A37AP	LVR-IC	LDO, 3.75V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0L6	-	XC6210A37APR	LVR-IC	LDO, 3.75V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0L7	-	LN6210A38AP	LVR-IC	LDO, 3.85V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0L7	-	XC6210A38APR	LVR-IC	LDO, 3.85V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0L8	-	LN6210A39AP	LVR-IC	LDO, 3.95V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0L8	-	XC6210A39APR	LVR-IC	LDO, 3.95V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0L9	-	LN6210A40AP	LVR-IC	LDO, 4.05V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0L9	-	XC6210A40APR	LVR-IC	LDO, 4.05V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0LA	-	LN6210A41AP	LVR-IC	LDO, 4.15V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0LA	-	XC6210A41APR	LVR-IC	LDO, 4.15V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0LB	-	LN6210A42AP	LVR-IC	LDO, 4.25V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0LB	-	XC6210A42APR	LVR-IC	LDO, 4.25V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0LC	-	LN6210A43AP	LVR-IC	LDO, 4.35V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0LC	-	XC6210A43APR	LVR-IC	LDO, 4.35V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0LD	-	LN6210A44AP	LVR-IC	LDO, 4.45V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0LD	-	XC6210A44APR	LVR-IC	LDO, 4.45V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0LE	-	LN6210A45AP	LVR-IC	LDO, 4.55V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0LE	-	XC6210A45APR	LVR-IC	LDO, 4.55V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0LF	-	LN6210A46AP	LVR-IC	LDO, 4.65V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0LF	-	XC6210A46APR	LVR-IC	LDO, 4.65V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0LH	-	LN6210A47AP	LVR-IC	LDO, 4.75V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0LH	-	XC6210A47APR	LVR-IC	LDO, 4.75V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0LK	-	LN6210A48AP	LVR-IC	LDO, 4.85V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0LK	-	XC6210A48APR	LVR-IC	LDO, 4.85V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0LL	-	LN6210A49AP	LVR-IC	LDO, 4.95V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0LL	-	XC6210A49APR	LVR-IC	LDO, 4.95V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0M0	-	LN6210B31AP	LVR-IC	LDO, 3.15V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0M0	-	XC6210B31APR	LVR-IC	LDO, 3.15V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0M1	-	LN6210B32AP	LVR-IC	LDO, 3.25V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0M1	-	XC6210B32APR	LVR-IC	LDO, 3.25V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0M2	-	LN6210B33AP	LVR-IC	LDO, 3.35V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0M2	-	XC6210B33APR	LVR-IC	LDO, 3.35V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0M3	-	LN6210B34AP	LVR-IC	LDO, 3.45V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0M3	-	XC6210B34APR	LVR-IC	LDO, 3.45V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0M4	-	LN6210B35AP	LVR-IC	LDO, 3.55V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0M4	-	XC6210B35APR	LVR-IC	LDO, 3.55V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0M5	-	LN6210B36AP	LVR-IC	LDO, 3.65V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0M5	-	XC6210B36APR	LVR-IC	LDO, 3.65V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0M6	-	LN6210B37AP	LVR-IC	LDO, 3.75V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0M6	-	XC6210B37APR	LVR-IC	LDO, 3.75V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0M7	-	LN6210B38AP	LVR-IC	LDO, 3.85V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0M7	-	XC6210B38APR	LVR-IC	LDO, 3.85V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0M8	-	LN6210B39AP	LVR-IC	LDO, 3.95V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0M8	-	XC6210B39APR	LVR-IC	LDO, 3.95V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0M9	-	LN6210B40AP	LVR-IC	LDO, 4.05V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0M9	-	XC6210B40APR	LVR-IC	LDO, 4.05V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0MA	-	LN6210B41AP	LVR-IC	LDO, 4.15V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0MA	-	XC6210B41APR	LVR-IC	LDO, 4.15V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0MB	-	LN6210B42AP	LVR-IC	LDO, 4.25V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0MB	-	XC6210B42APR	LVR-IC	LDO, 4.25V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0MC	-	LN6210B43AP	LVR-IC	LDO, 4.35V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0MC	-	XC6210B43APR	LVR-IC	LDO, 4.35V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0MD	-	LN6210B44AP	LVR-IC	LDO, 4.45V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0MD	-	XC6210B44APR	LVR-IC	LDO, 4.45V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0ME	-	LN6210B45AP	LVR-IC	LDO, 4.55V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0ME	-	XC6210B45APR	LVR-IC	LDO, 4.55V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0MF	-	LN6210B46AP	LVR-IC	LDO, 4.65V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0MF	-	XC6210B46APR	LVR-IC	LDO, 4.65V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0MH	-	LN6210B47AP	LVR-IC	LDO, 4.75V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0MH	-	XC6210B47APR	LVR-IC	LDO, 4.75V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0MK	-	LN6210B48AP	LVR-IC	LDO, 4.85V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0MK	-	XC6210B48APR	LVR-IC	LDO, 4.85V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0ML	-	LN6210B49AP	LVR-IC	LDO, 4.95V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0ML	-	XC6210B49APR	LVR-IC	LDO, 4.95V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0N0	-	LN6210C31AP	LVR-IC	LDO, 3.15V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0N0	-	XC6210C31APR	LVR-IC	LDO, 3.15V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0N1	-	LN6210C32AP	LVR-IC	LDO, 3.25V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0N1	-	XC6210C32APR	LVR-IC	LDO, 3.25V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0N2	-	LN6210C33AP	LVR-IC	LDO, 3.35V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0N2	-	XC6210C33APR	LVR-IC	LDO, 3.35V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0N3	-	LN6210C34AP	LVR-IC	LDO, 3.45V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0N3	-	XC6210C34APR	LVR-IC	LDO, 3.45V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0N4	-	LN6210C35AP	LVR-IC	LDO, 3.55V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0N4	-	XC6210C35APR	LVR-IC	LDO, 3.55V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0N5	-	LN6210C36AP	LVR-IC	LDO, 3.65V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0N5	-	XC6210C36APR	LVR-IC	LDO, 3.65V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0N6	-	LN6210C37AP	LVR-IC	LDO, 3.75V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0N6	-	XC6210C37APR	LVR-IC	LDO, 3.75V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0N7	-	LN6210C38AP	LVR-IC	LDO, 3.85V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0N7	-	XC6210C38APR	LVR-IC	LDO, 3.85V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0N8	-	LN6210C39AP	LVR-IC	LDO, 3.95V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0N8	-	XC6210C39APR	LVR-IC	LDO, 3.95V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0N9	-	LN6210C40AP	LVR-IC	LDO, 4.05V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0N9	-	XC6210C40APR	LVR-IC	LDO, 4.05V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0NA	-	LN6210C41AP	LVR-IC	LDO, 4.15V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0NA	-	XC6210C41APR	LVR-IC	LDO, 4.15V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0NB	-	LN6210C42AP	LVR-IC	LDO, 4.25V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0NB	-	XC6210C42APR	LVR-IC	LDO, 4.25V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0NC	-	LN6210C43AP	LVR-IC	LDO, 4.35V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0NC	-	XC6210C43APR	LVR-IC	LDO, 4.35V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0ND	-	LN6210C44AP	LVR-IC	LDO, 4.45V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0ND	-	XC6210C44APR	LVR-IC	LDO, 4.45V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0NE	-	LN6210C45AP	LVR-IC	LDO, 4.55V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0NE	-	XC6210C45APR	LVR-IC	LDO, 4.55V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0NF	-	LN6210C46AP	LVR-IC	LDO, 4.65V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0NF	-	XC6210C46APR	LVR-IC	LDO, 4.65V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0NH	-	LN6210C47AP	LVR-IC	LDO, 4.75V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0NH	-	XC6210C47APR	LVR-IC	LDO, 4.75V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0NK	-	LN6210C48AP	LVR-IC	LDO, 4.85V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0NK	-	XC6210C48APR	LVR-IC	LDO, 4.85V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0NL	-	LN6210C49AP	LVR-IC	LDO, 4.95V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0NL	-	XC6210C49APR	LVR-IC	LDO, 4.95V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0P0	-	LN6210D31AP	LVR-IC	LDO, 3.15V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0P0	-	XC6210D31APR	LVR-IC	LDO, 3.15V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0P1	-	LN6210D32AP	LVR-IC	LDO, 3.25V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0P1	-	XC6210D32APR	LVR-IC	LDO, 3.25V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0P2	-	LN6210D33AP	LVR-IC	LDO, 3.35V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0P2	-	XC6210D33APR	LVR-IC	LDO, 3.35V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0P3	-	LN6210D34AP	LVR-IC	LDO, 3.45V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0P3	-	XC6210D34APR	LVR-IC	LDO, 3.45V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0P4	-	LN6210D35AP	LVR-IC	LDO, 3.55V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0P4	-	XC6210D35APR	LVR-IC	LDO, 3.55V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0P5	-	LN6210D36AP	LVR-IC	LDO, 3.65V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0P5	-	XC6210D36APR	LVR-IC	LDO, 3.65V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0P6	-	LN6210D37AP	LVR-IC	LDO, 3.75V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0P6	-	XC6210D37APR	LVR-IC	LDO, 3.75V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0P7	-	LN6210D38AP	LVR-IC	LDO, 3.85V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0P7	-	XC6210D38APR	LVR-IC	LDO, 3.85V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0P8	-	LN6210D39AP	LVR-IC	LDO, 3.95V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0P8	-	XC6210D39APR	LVR-IC	LDO, 3.95V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0P9	-	LN6210D40AP	LVR-IC	LDO, 4.05V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0P9	-	XC6210D40APR	LVR-IC	LDO, 4.05V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0PA	-	LN6210D41AP	LVR-IC	LDO, 4.15V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0PA	-	XC6210D41APR	LVR-IC	LDO, 4.15V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0PB	-	LN6210D42AP	LVR-IC	LDO, 4.25V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0PB	-	XC6210D42APR	LVR-IC	LDO, 4.25V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0PC	-	LN6210D43AP	LVR-IC	LDO, 4.35V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0PC	-	XC6210D43APR	LVR-IC	LDO, 4.35V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0PD	-	LN6210D44AP	LVR-IC	LDO, 4.45V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0PD	-	XC6210D44APR	LVR-IC	LDO, 4.45V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0PE	-	LN6210D45AP	LVR-IC	LDO, 4.55V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0PE	-	XC6210D45APR	LVR-IC	LDO, 4.55V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0PF	-	LN6210D46AP	LVR-IC	LDO, 4.65V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0PF	-	XC6210D46APR	LVR-IC	LDO, 4.65V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0PH	-	LN6210D47AP	LVR-IC	LDO, 4.75V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0PH	-	XC6210D47APR	LVR-IC	LDO, 4.75V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0PK	-	LN6210D48AP	LVR-IC	LDO, 4.85V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0PK	-	XC6210D48APR	LVR-IC	LDO, 4.85V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0PL	-	LN6210D49AP	LVR-IC	LDO, 4.95V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0PL	-	XC6210D49APR	LVR-IC	LDO, 4.95V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0V7	-	XC6210A082PR	LVR-IC	LDO, 0.8V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0V8	-	XC6210A092PR	LVR-IC	LDO, 0.9V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0V9	-	XC6210A102PR	LVR-IC	LDO, 1.0V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VA	-	XC6210A112PR	LVR-IC	LDO, 1.1V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VB	-	XC6210A122PR	LVR-IC	LDO, 1.2V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VC	-	XC6210A132PR	LVR-IC	LDO, 1.3V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VD	-	XC6210A142PR	LVR-IC	LDO, 1.4V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VE	-	LN6210A152P	LVR-IC	LDO, 1.5V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0VE	-	XC6210A152PR	LVR-IC	LDO, 1.5V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VF	-	LN6210A162P	LVR-IC	LDO, 1.6V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0VF	-	XC6210A162PR	LVR-IC	LDO, 1.6V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VH	-	LN6210A172P	LVR-IC	LDO, 1.7V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0VH	-	XC6210A172PR	LVR-IC	LDO, 1.7V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VK	-	LN6210A182P	LVR-IC	LDO, 1.8V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0VK	-	XC6210A182PR	LVR-IC	LDO, 1.8V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VL	-	LN6210A192P	LVR-IC	LDO, 1.9V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0VL	-	XC6210A192PR	LVR-IC	LDO, 1.9V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VM	-	LN6210A202P	LVR-IC	LDO, 2.0V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0VM	-	XC6210A202PR	LVR-IC	LDO, 2.0V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VN	-	LN6210A212P	LVR-IC	LDO, 2.1V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0VN	-	XC6210A212PR	LVR-IC	LDO, 2.1V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VP	-	LN6210A222P	LVR-IC	LDO, 2.2V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0VP	-	XC6210A222PR	LVR-IC	LDO, 2.2V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VR	-	LN6210A232P	LVR-IC	LDO, 2.3V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0VR	-	XC6210A232PR	LVR-IC	LDO, 2.3V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VS	-	LN6210A242P	LVR-IC	LDO, 2.4V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0VS	-	XC6210A242PR	LVR-IC	LDO, 2.4V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VT	-	LN6210A252P	LVR-IC	LDO, 2.5V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0VT	-	XC6210A252PR	LVR-IC	LDO, 2.5V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VU	-	LN6210A262P	LVR-IC	LDO, 2.6V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0VU	-	XC6210A262PR	LVR-IC	LDO, 2.6V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VV	-	LN6210A272P	LVR-IC	LDO, 2.7V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0VV	-	XC6210A272PR	LVR-IC	LDO, 2.7V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VX	-	LN6210A282P	LVR-IC	LDO, 2.8V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0VX	-	XC6210A282PR	LVR-IC	LDO, 2.8V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VY	-	LN6210A292P	LVR-IC	LDO, 2.9V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0VY	-	XC6210A292PR	LVR-IC	LDO, 2.9V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0VZ	-	LN6210A302P	LVR-IC	LDO, 3.0V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Nln
0VZ	-	XC6210A302PR	LVR-IC	LDO, 3.0V±2%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6h	Tor
0X7	-	XC6210B082PR	LVR-IC	LDO, 0.8V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0X8	-	XC6210B092PR	LVR-IC	LDO, 0.9V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0X9	-	XC6210B102PR	LVR-IC	LDO, 1.0V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XA	-	XC6210B112PR	LVR-IC	LDO, 1.1V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XB	-	XC6210B122PR	LVR-IC	LDO, 1.2V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XC	-	XC6210B132PR	LVR-IC	LDO, 1.3V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XD	-	XC6210B142PR	LVR-IC	LDO, 1.4V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XE	-	LN6210B152P	LVR-IC	LDO, 1.5V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0XE	-	XC6210B152PR	LVR-IC	LDO, 1.5V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XF	-	LN6210B162P	LVR-IC	LDO, 1.6V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0XF	-	XC6210B162PR	LVR-IC	LDO, 1.6V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XH	-	LN6210B172P	LVR-IC	LDO, 1.7V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0XH	-	XC6210B172PR	LVR-IC	LDO, 1.7V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XK	-	LN6210B182P	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0XK	-	XC6210B182PR	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XL	-	LN6210B192P	LVR-IC	LDO, 1.9V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0XL	-	XC6210B192PR	LVR-IC	LDO, 1.9V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XM	-	LN6210B202P	LVR-IC	LDO, 2.0V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0XM	-	XC6210B202PR	LVR-IC	LDO, 2.0V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XN	-	LN6210B212P	LVR-IC	LDO, 2.1V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0XN	-	XC6210B212PR	LVR-IC	LDO, 2.1V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XP	-	LN6210B222P	LVR-IC	LDO, 2.2V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0XP	-	XC6210B222PR	LVR-IC	LDO, 2.2V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XR	-	LN6210B232P	LVR-IC	LDO, 2.3V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0XR	-	XC6210B232PR	LVR-IC	LDO, 2.3V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XS	-	LN6210B242P	LVR-IC	LDO, 2.4V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0XS	-	XC6210B242PR	LVR-IC	LDO, 2.4V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XT	-	LN6210B252P	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0XT	-	XC6210B252PR	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XU	-	LN6210B262P	LVR-IC	LDO, 2.6V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0XU	-	XC6210B262PR	LVR-IC	LDO, 2.6V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XV	-	LN6210B272P	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0XV	-	XC6210B272PR	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XX	-	LN6210B282P	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0XX	-	XC6210B282PR	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XY	-	LN6210B292P	LVR-IC	LDO, 2.9V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0XY	-	XC6210B292PR	LVR-IC	LDO, 2.9V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0XZ	-	LN6210B302P	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Nln
0XZ	-	XC6210B302PR	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	SOT-89-5	32vy	VR4	6h	Tor
0Y7	-	XC6210C082PR	LVR-IC	LDO, 0.8V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0Y8	-	XC6210C092PR	LVR-IC	LDO, 0.9V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0Y9	-	XC6210C102PR	LVR-IC	LDO, 1.0V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YA	-	XC6210C112PR	LVR-IC	LDO, 1.1V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YB	-	XC6210C122PR	LVR-IC	LDO, 1.2V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YC	-	XC6210C132PR	LVR-IC	LDO, 1.3V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YD	-	XC6210C142PR	LVR-IC	LDO, 1.4V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YE	-	LN6210C152P	LVR-IC	LDO, 1.5V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0YE	-	XC6210C152PR	LVR-IC	LDO, 1.5V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YF	-	LN6210C162P	LVR-IC	LDO, 1.6V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0YF	-	XC6210C162PR	LVR-IC	LDO, 1.6V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YH	-	LN6210C172P	LVR-IC	LDO, 1.7V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0YH	-	XC6210C172PR	LVR-IC	LDO, 1.7V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YK	-	LN6210C182P	LVR-IC	LDO, 1.8V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0YK	-	XC6210C182PR	LVR-IC	LDO, 1.8V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YL	-	LN6210C192P	LVR-IC	LDO, 1.9V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0YL	-	XC6210C192PR	LVR-IC	LDO, 1.9V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YM	-	LN6210C202P	LVR-IC	LDO, 2.0V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0YM	-	XC6210C202PR	LVR-IC	LDO, 2.0V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YN	-	LN6210C212P	LVR-IC	LDO, 2.1V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0YN	-	XC6210C212PR	LVR-IC	LDO, 2.1V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YP	-	LN6210C222P	LVR-IC	LDO, 2.2V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0YP	-	XC6210C222PR	LVR-IC	LDO, 2.2V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YR	-	LN6210C232P	LVR-IC	LDO, 2.3V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0YR	-	XC6210C232PR	LVR-IC	LDO, 2.3V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YS	-	LN6210C242P	LVR-IC	LDO, 2.4V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0YS	-	XC6210C242PR	LVR-IC	LDO, 2.4V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YT	-	LN6210C252P	LVR-IC	LDO, 2.5V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0YT	-	XC6210C252PR	LVR-IC	LDO, 2.5V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YU	-	LN6210C262P	LVR-IC	LDO, 2.6V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0YU	-	XC6210C262PR	LVR-IC	LDO, 2.6V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YV	-	LN6210C272P	LVR-IC	LDO, 2.7V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0YV	-	XC6210C272PR	LVR-IC	LDO, 2.7V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YX	-	LN6210C282P	LVR-IC	LDO, 2.8V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0YX	-	XC6210C282PR	LVR-IC	LDO, 2.8V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YY	-	LN6210C292P	LVR-IC	LDO, 2.9V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0YY	-	XC6210C292PR	LVR-IC	LDO, 2.9V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0YZ	-	LN6210C302P	LVR-IC	LDO, 3.0V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Nln
0YZ	-	XC6210C302PR	LVR-IC	LDO, 3.0V±2%, 700mA, -CE, PUR	SOT-89-5	32vy	VR4	6h	Tor
0Z0	-	XC6210D102PR	LVR-IC	LDO, 1.0V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0Z7	-	XC6210D082PR	LVR-IC	LDO, 0.8V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0Z8	-	XC6210D092PR	LVR-IC	LDO, 0.9V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZA	-	XC6210D112PR	LVR-IC	LDO, 1.1V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZB	-	XC6210D122PR	LVR-IC	LDO, 1.2V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZC	-	XC6210D132PR	LVR-IC	LDO, 1.3V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZD	-	XC6210D142PR	LVR-IC	LDO, 1.4V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZE	-	LN6210D152P	LVR-IC	LDO, 1.5V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0ZE	-	XC6210D152PR	LVR-IC	LDO, 1.5V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZF	-	LN6210D162P	LVR-IC	LDO, 1.6V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0ZF	-	XC6210D162PR	LVR-IC	LDO, 1.6V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZH	-	LN6210D172P	LVR-IC	LDO, 1.7V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0ZH	-	XC6210D172PR	LVR-IC	LDO, 1.7V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZK	-	LN6210D182P	LVR-IC	LDO, 1.8V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0ZK	-	XC6210D182PR	LVR-IC	LDO, 1.8V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZL	-	LN6210D192P	LVR-IC	LDO, 1.9V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0ZL	-	XC6210D192PR	LVR-IC	LDO, 1.9V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZM	-	LN6210D202P	LVR-IC	LDO, 2.0V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0ZM	-	XC6210D202PR	LVR-IC	LDO, 2.0V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZN	-	LN6210D212P	LVR-IC	LDO, 2.1V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0ZN	-	XC6210D212PR	LVR-IC	LDO, 2.1V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZP	-	LN6210D222P	LVR-IC	LDO, 2.2V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0ZP	-	XC6210D222PR	LVR-IC	LDO, 2.2V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZR	-	LN6210D232P	LVR-IC	LDO, 2.3V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0ZR	-	XC6210D232PR	LVR-IC	LDO, 2.3V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZS	-	LN6210D242P	LVR-IC	LDO, 2.4V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0ZS	-	XC6210D242PR	LVR-IC	LDO, 2.4V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZT	-	LN6210D252P	LVR-IC	LDO, 2.5V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0ZT	-	XC6210D252PR	LVR-IC	LDO, 2.5V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZU	-	LN6210D262P	LVR-IC	LDO, 2.6V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0ZU	-	XC6210D262PR	LVR-IC	LDO, 2.6V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZV	-	LN6210D272P	LVR-IC	LDO, 2.7V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0ZV	-	XC6210D272PR	LVR-IC	LDO, 2.7V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZX	-	LN6210D282P	LVR-IC	LDO, 2.8V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0ZX	-	XC6210D282PR	LVR-IC	LDO, 2.8V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZY	-	LN6210D292P	LVR-IC	LDO, 2.9V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0ZY	-	XC6210D292PR	LVR-IC	LDO, 2.9V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
0ZZ	-	LN6210D302P	LVR-IC	LDO, 3.0V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Nln
0ZZ	-	XC6210D302PR	LVR-IC	LDO, 3.0V±2%, 700mA, -CE	SOT-89-5	32vy	VR4	6h	Tor
120	ka	XC6372C201P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
121	ka	XC6372C211P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
122	ka	XC6372C221P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
123	ka	XC6372C231P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
124	ka	XC6372C241P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
125	ka	XC6372C251P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
126	ka	XC6372C261P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
127	ka	XC6372C271P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
128	ka	XC6372C281P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
129	ka	XC6372C291P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
12A	ka	XC6372C202P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
12B	ka	XC6372C212P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
12C	ka	XC6372C222P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
12D	ka	XC6372C232P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
12E	ka	XC6372C242P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
12F	ka	XC6372C252P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
12H	ka	XC6372C262P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
12K	ka	XC6372C272P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
12L	ka	XC6372C282P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
12M	ka	XC6372C292P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
130	ka	XC6372C301P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
131	ka	XC6372C311P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
132	ka	XC6372C321P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
133	ka	XC6372C331P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
134	ka	XC6372C341P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
135	ka	XC6372C351P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
136	ka	XC6372C361P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
137	ka	XC6372C371P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
138	ka	XC6372C381P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
139	ka	XC6372C391P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
13A	ka	XC6372C302P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
13B	ka	XC6372C312P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
13C	ka	XC6372C322P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
13D	ka	XC6372C332P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
13E	ka	XC6372C342P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
13F	ka	XC6372C352P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
13H	ka	XC6372C362P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
13K	ka	XC6372C372P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
13L	ka	XC6372C382P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
13M	ka	XC6372C392P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
13P	-	TK11213BU	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
140	ka	XC6372C401P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
141	ka	XC6372C411P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
142	ka	XC6372C421P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
143	ka	XC6372C431P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
144	ka	XC6372C441P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
145	ka	XC6372C451P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
146	ka	XC6372C461P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
147	ka	XC6372C471P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
148	ka	XC6372C481P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
149	ka	XC6372C491P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
14A	ka	XC6372C402P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
14B	ka	XC6372C412P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
14C	ka	XC6372C422P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
14D	ka	XC6372C432P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
14E	ka	XC6372C442P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
14F	ka	XC6372C452P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
14H	ka	XC6372C462P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
14K	ka	XC6372C472P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
14L	ka	XC6372C482P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
14M	ka	XC6372C492P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
14P	-	TK11214BU	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
15-	-	XC62HR1502PR-G	LVR-IC	LDO, 1.5V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
150	ka	XC6372C501P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
151	ka	XC6372C511P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
152	ka	XC6372C521P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
153	ka	XC6372C531P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
154	ka	XC6372C541P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
155	ka	XC6372C551P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
156	ka	XC6372C561P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
157	ka	XC6372C571P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
158	ka	XC6372C581P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
159	ka	XC6372C591P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
15A	ka	XC6372C502P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
15B	ka	XC6372C512P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
15C	ka	XC6372C522P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
15D	ka	XC6372C532P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
15E	ka	XC6372C542P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
15F	ka	XC6372C552P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
15H	ka	XC6372C562P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
15K	ka	XC6372C572P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
15L	ka	XC6372C582P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
15M	ka	XC6372C592P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
15P	-	TK11215BU	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
16-	-	XC62HR1602PR-G	LVR-IC	LDO, 1.6V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
160	ka	XC6372C601P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
161	ka	XC6372C611P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
162	ka	XC6372C621P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
163	ka	XC6372C631P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
164	ka	XC6372C641P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
165	ka	XC6372C651P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
166	ka	XC6372C661P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
167	ka	XC6372C671P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
168	ka	XC6372C681P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
169	ka	XC6372C691P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
16A	ka	XC6372C602P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
16B	ka	XC6372C612P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
16C	ka	XC6372C622P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
16D	ka	XC6372C632P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
16E	ka	XC6372C642P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
16F	ka	XC6372C652P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
16H	ka	XC6372C662P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
16K	ka	XC6372C672P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
16L	ka	XC6372C682P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
16M	ka	XC6372C692P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
16P	-	TK11216BU	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
17-	-	XC62HR1702PR-G	LVR-IC	LDO, 1.7V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
170	ka	XC6372C701P	DC-DC-IC	PWM/PFM step-up, 100kHz, 7.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
17A	ka	XC6372C702P	DC-DC-IC	PWM/PFM step-up, 180kHz, 7.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
17P	-	TK11217BU	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
18-	-	XC62HR1802PR-G	LVR-IC	LDO, 1.8V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
18P	-	TK11218BU	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
19-	-	XC62HR1902PR-G	LVR-IC	LDO, 1.9V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
19P	-	TK11219BU	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
1C0	-	XC6503D121PR-G	LVR-IC	LDO, 1.2V±20mV, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1C0	ka	XC6372C200P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1C1	-	XC6503D131PR-G	LVR-IC	LDO, 1.3V±20mV, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1C1	ka	XC6372C210P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1C2	-	XC6503D141PR-G	LVR-IC	LDO, 1.4V±20mV, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1C2	ka	XC6372C220P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1C3	-	XC6503D151PR-G	LVR-IC	LDO, 1.5V±20mV, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1C3	ka	XC6372C230P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1C4	-	XC6503D161PR-G	LVR-IC	LDO, 1.6V±20mV, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1C4	ka	XC6372C240P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1C5	-	XC6503D171PR-G	LVR-IC	LDO, 1.7V±20mV, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1C5	ka	XC6372C250P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1C6	-	XC6503D181PR-G	LVR-IC	LDO, 1.8V±20mV, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1C6	ka	XC6372C260P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1C7	-	XC6503D191PR-G	LVR-IC	LDO, 1.9V±20mV, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1C7	ka	XC6372C270P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1C8	-	XC6503D201PR-G	LVR-IC	LDO, 2.0V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1C8	ka	XC6372C280P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1C9	-	XC6503D211PR-G	LVR-IC	LDO, 2.1V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1C9	ka	XC6372C290P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1CA	-	XC6503D221PR-G	LVR-IC	LDO, 2.2V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CB	-	XC6503D231PR-G	LVR-IC	LDO, 2.3V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CC	-	XC6503D241PR-G	LVR-IC	LDO, 2.4V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CD	-	XC6503D251PR-G	LVR-IC	LDO, 2.5V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CE	-	XC6503D261PR-G	LVR-IC	LDO, 2.6V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CF	-	XC6503D271PR-G	LVR-IC	LDO, 2.7V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CH	-	XC6503D281PR-G	LVR-IC	LDO, 2.8V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CK	-	XC6503D291PR-G	LVR-IC	LDO, 2.9V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CL	-	XC6503D301PR-G	LVR-IC	LDO, 3.0V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CM	-	XC6503D311PR-G	LVR-IC	LDO, 3.1V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CN	-	XC6503D321PR-G	LVR-IC	LDO, 3.2V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CP	-	XC6503D331PR-G	LVR-IC	LDO, 3.3V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CR	-	XC6503D341PR-G	LVR-IC	LDO, 3.4V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CS	-	XC6503D351PR-G	LVR-IC	LDO, 3.5V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CT	-	XC6503D361PR-G	LVR-IC	LDO, 3.6V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CU	-	XC6503D371PR-G	LVR-IC	LDO, 3.7V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CV	-	XC6503D381PR-G	LVR-IC	LDO, 3.8V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CX	-	XC6503D391PR-G	LVR-IC	LDO, 3.9V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CY	-	XC6503D401PR-G	LVR-IC	LDO, 4.0V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1CZ	-	XC6503D411PR-G	LVR-IC	LDO, 4.1V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1D0	-	XC6503D421PR-G	LVR-IC	LDO, 4.2V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1D0	ka	XC6372C300P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1D1	-	XC6503D431PR-G	LVR-IC	LDO, 4.3V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1D1	ka	XC6372C310P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1D2	-	XC6503D441PR-G	LVR-IC	LDO, 4.4V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1D2	ka	XC6372C320P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1D3	-	XC6503D451PR-G	LVR-IC	LDO, 4.5V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1D3	ka	XC6372C330P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1D4	-	XC6503D461PR-G	LVR-IC	LDO, 4.6V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1D4	ka	XC6372C340P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1D5	-	XC6503D471PR-G	LVR-IC	LDO, 4.7V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1D5	ka	XC6372C350P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1D6	-	XC6503D481PR-G	LVR-IC	LDO, 4.8V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1D6	ka	XC6372C360P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1D7	-	XC6503D491PR-G	LVR-IC	LDO, 4.9V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1D7	ka	XC6372C370P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1D8	-	XC6503D501PR-G	LVR-IC	LDO, 5.0V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1D8	ka	XC6372C380P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1D9	ka	XC6372C390P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1E0	-	XC6503D12APR-G	LVR-IC	LDO, 1.25V±20mV, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1E0	ka	XC6372C400P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1E1	-	XC6503D13APR-G	LVR-IC	LDO, 1.35V±20mV, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1E1	ka	XC6372C410P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1E2	-	XC6503D14APR-G	LVR-IC	LDO, 1.45V±20mV, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1E2	ka	XC6372C420P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1E3	-	XC6503D15APR-G	LVR-IC	LDO, 1.55V±20mV, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1E3	ka	XC6372C430P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1E4	-	XC6503D16APR-G	LVR-IC	LDO, 1.65V±20mV, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1E4	ka	XC6372C440P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1E5	-	XC6503D17APR-G	LVR-IC	LDO, 1.75V±20mV, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1E5	ka	XC6372C450P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1E6	-	XC6503D18APR-G	LVR-IC	LDO, 1.85V±20mV, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1E6	ka	XC6372C460P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1E7	-	XC6503D19APR-G	LVR-IC	LDO, 1.95V±20mV, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1E7	ka	XC6372C470P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1E8	-	XC6503D20APR-G	LVR-IC	LDO, 2.05V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1E8	ka	XC6372C480P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1E9	-	XC6503D21APR-G	LVR-IC	LDO, 2.15V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1E9	ka	XC6372C490P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1EA	-	XC6503D22APR-G	LVR-IC	LDO, 2.25V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1EB	-	XC6503D23APR-G	LVR-IC	LDO, 2.35V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1EC	-	XC6503D24APR-G	LVR-IC	LDO, 2.45V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1ED	-	XC6503D25APR-G	LVR-IC	LDO, 2.55V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1EE	-	XC6503D26APR-G	LVR-IC	LDO, 2.65V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1EF	-	XC6503D27APR-G	LVR-IC	LDO, 2.75V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1EH	-	XC6503D28APR-G	LVR-IC	LDO, 2.85V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1EK	-	XC6503D29APR-G	LVR-IC	LDO, 2.95V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1EL	-	XC6503D30APR-G	LVR-IC	LDO, 3.05V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1EM	-	XC6503D31APR-G	LVR-IC	LDO, 3.15V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1EN	-	XC6503D32APR-G	LVR-IC	LDO, 3.25V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1EP	-	XC6503D33APR-G	LVR-IC	LDO, 3.35V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1ER	-	XC6503D34APR-G	LVR-IC	LDO, 3.45V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1ES	-	XC6503D35APR-G	LVR-IC	LDO, 3.55V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1ET	-	XC6503D36APR-G	LVR-IC	LDO, 3.65V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1EU	-	XC6503D37APR-G	LVR-IC	LDO, 3.75V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1EV	-	XC6503D38APR-G	LVR-IC	LDO, 3.85V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1EX	-	XC6503D39APR-G	LVR-IC	LDO, 3.95V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1EY	-	XC6503D40APR-G	LVR-IC	LDO, 4.05V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1EZ	-	XC6503D41APR-G	LVR-IC	LDO, 4.15V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1F0	-	XC6503D42APR-G	LVR-IC	LDO, 4.25V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1F0	ka	XC6372C500P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1F1	-	XC6503D43APR-G	LVR-IC	LDO, 4.35V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1F1	ka	XC6372C510P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1F2	-	XC6503D44APR-G	LVR-IC	LDO, 4.45V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1F2	ka	XC6372C520P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1F3	-	XC6503D45APR-G	LVR-IC	LDO, 4.55V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1F3	ka	XC6372C530P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1F4	-	XC6503D46APR-G	LVR-IC	LDO, 4.65V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1F4	ka	XC6372C540P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1F5	-	XC6503D47APR-G	LVR-IC	LDO, 4.75V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1F5	ka	XC6372C550P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1F6	-	XC6503D48APR-G	LVR-IC	LDO, 4.85V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1F6	ka	XC6372C560P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1F7	-	XC6503D49APR-G	LVR-IC	LDO, 4.95V±1%, 500mA, +CE	SOT-89-5	32um	VR4	6n	Tor
1F7	ka	XC6372C570P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1F8	ka	XC6372C580P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1F9	ka	XC6372C590P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1H0	ka	XC6372C600P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1H1	ka	XC6372C610P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1H2	ka	XC6372C620P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1H3	ka	XC6372C630P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1H4	ka	XC6372C640P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1H5	ka	XC6372C650P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1H6	ka	XC6372C660P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1H7	ka	XC6372C670P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1H8	ka	XC6372C680P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1H9	ka	XC6372C690P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
1K0	ka	XC6372C700P	DC-DC-IC	PWM/PFM step-up, 50kHz, 7.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
20-	-	XC62HR2002PR-G	LVR-IC	LDO, 2.0V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
20M	-	XC6216B202PR	LVR-IC	2.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
20M	-	XE6216B202PR	LVR-IC	2.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
20N	-	XC6216B212PR	LVR-IC	2.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
20N	-	XE6216B212PR	LVR-IC	2.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
20P	-	TK11220BU	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
20P	-	XC6216B222PR	LVR-IC	2.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
20P	-	XE6216B222PR	LVR-IC	2.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
20Q	-	TK11320BU	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
20R	-	XC6216B232PR	LVR-IC	2.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
20R	-	XE6216B232PR	LVR-IC	2.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
20S	-	XC6216B242PR	LVR-IC	2.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
20S	-	XE6216B242PR	LVR-IC	2.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
20T	-	XC6216B252PR	LVR-IC	2.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
20T	-	XE6216B252PR	LVR-IC	2.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
20U	-	XC6216B262PR	LVR-IC	2.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
20U	-	XE6216B262PR	LVR-IC	2.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
20V	-	XC6216B272PR	LVR-IC	2.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
20V	-	XE6216B272PR	LVR-IC	2.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
20X	-	XC6216B282PR	LVR-IC	2.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
20X	-	XE6216B282PR	LVR-IC	2.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
20Y	-	XC6216B292PR	LVR-IC	2.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
20Y	-	XE6216B292PR	LVR-IC	2.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
20Z	-	XC6216B302PR	LVR-IC	3.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
20Z	-	XE6216B302PR	LVR-IC	3.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21-	-	XC62HR2102PR-G	LVR-IC	LDO, 2.1V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
210	-	XC6216B312PR	LVR-IC	3.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
210	-	XE6216B312PR	LVR-IC	3.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
211	-	XC6216B322PR	LVR-IC	3.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
211	-	XE6216B322PR	LVR-IC	3.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
212	-	XC6216B332PR	LVR-IC	3.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
212	-	XE6216B332PR	LVR-IC	3.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
213	-	XC6216B342PR	LVR-IC	3.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
213	-	XE6216B342PR	LVR-IC	3.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
214	-	XC6216B352PR	LVR-IC	3.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
214	-	XE6216B352PR	LVR-IC	3.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
215	-	XC6216B362PR	LVR-IC	3.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
215	-	XE6216B362PR	LVR-IC	3.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
216	-	XC6216B372PR	LVR-IC	3.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
216	-	XE6216B372PR	LVR-IC	3.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
217	-	XC6216B382PR	LVR-IC	3.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
217	-	XE6216B382PR	LVR-IC	3.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
218	-	XC6216B392PR	LVR-IC	3.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
218	-	XE6216B392PR	LVR-IC	3.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
219	-	XC6216B402PR	LVR-IC	4.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
219	-	XE6216B402PR	LVR-IC	4.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21A	-	XC6216B412PR	LVR-IC	4.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21A	-	XE6216B412PR	LVR-IC	4.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21B	-	XC6216B422PR	LVR-IC	4.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21B	-	XE6216B422PR	LVR-IC	4.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21C	-	XC6216B432PR	LVR-IC	4.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21C	-	XE6216B432PR	LVR-IC	4.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21D	-	XC6216B442PR	LVR-IC	4.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21D	-	XE6216B442PR	LVR-IC	4.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21E	-	XC6216B452PR	LVR-IC	4.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21E	-	XE6216B452PR	LVR-IC	4.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21F	-	XC6216B462PR	LVR-IC	4.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21F	-	XE6216B462PR	LVR-IC	4.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21H	-	XC6216B472PR	LVR-IC	4.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21H	-	XE6216B472PR	LVR-IC	4.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21K	-	XC6216B482PR	LVR-IC	4.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21K	-	XE6216B482PR	LVR-IC	4.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21L	-	XC6216B492PR	LVR-IC	4.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21L	-	XE6216B492PR	LVR-IC	4.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21M	-	XC6216B502PR	LVR-IC	5.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21M	-	XE6216B502PR	LVR-IC	5.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21N	-	XC6216B512PR	LVR-IC	5.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21N	-	XE6216B512PR	LVR-IC	5.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21P	-	TK11221BU	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
21P	-	XC6216B522PR	LVR-IC	5.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21P	-	XE6216B522PR	LVR-IC	5.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21Q	-	TK11321BU	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
21R	-	XC6216B532PR	LVR-IC	5.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21R	-	XE6216B532PR	LVR-IC	5.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21S	-	XC6216B542PR	LVR-IC	5.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21S	-	XE6216B542PR	LVR-IC	5.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21T	-	XC6216B552PR	LVR-IC	5.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21T	-	XE6216B552PR	LVR-IC	5.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21U	-	XC6216B562PR	LVR-IC	5.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21U	-	XE6216B562PR	LVR-IC	5.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21V	-	XC6216B572PR	LVR-IC	5.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21V	-	XE6216B572PR	LVR-IC	5.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21X	-	XC6216B582PR	LVR-IC	5.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
21X	-	XE6216B582PR	LVR-IC	5.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21Y	-	XC6216B592PR	LVR-IC	5.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21Y	-	XE6216B592PR	LVR-IC	5.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
21Z	-	XC6216B602PR	LVR-IC	6.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
21Z	-	XE6216B602PR	LVR-IC	6.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22-	-	XC62HR2202PR-G	LVR-IC	LDO, 2.2V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
220	-	XC6216B612PR	LVR-IC	6.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
220	-	XE6216B612PR	LVR-IC	6.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
221	-	XC6216B622PR	LVR-IC	6.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
221	-	XE6216B622PR	LVR-IC	6.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
222	-	XC6216B632PR	LVR-IC	6.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
222	-	XE6216B632PR	LVR-IC	6.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
223	-	XC6216B642PR	LVR-IC	6.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
223	-	XE6216B642PR	LVR-IC	6.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
224	-	XC6216B652PR	LVR-IC	6.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
224	-	XE6216B652PR	LVR-IC	6.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
225	-	XC6216B662PR	LVR-IC	6.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
225	-	XE6216B662PR	LVR-IC	6.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
226	-	XC6216B672PR	LVR-IC	6.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
226	-	XE6216B672PR	LVR-IC	6.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
227	-	XC6216B682PR	LVR-IC	6.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
227	-	XE6216B682PR	LVR-IC	6.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
228	-	XC6216B692PR	LVR-IC	6.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
228	-	XE6216B692PR	LVR-IC	6.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
229	-	XC6216B702PR	LVR-IC	7.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
229	-	XE6216B702PR	LVR-IC	7.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22A	-	XC6216B712PR	LVR-IC	7.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22A	-	XE6216B712PR	LVR-IC	7.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22B	-	XC6216B722PR	LVR-IC	7.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22B	-	XE6216B722PR	LVR-IC	7.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22C	-	XC6216B732PR	LVR-IC	7.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22C	-	XE6216B732PR	LVR-IC	7.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22D	-	XC6216B742PR	LVR-IC	7.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22D	-	XE6216B742PR	LVR-IC	7.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22E	-	XC6216B752PR	LVR-IC	7.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22E	-	XE6216B752PR	LVR-IC	7.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22F	-	XC6216B762PR	LVR-IC	7.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22F	-	XE6216B762PR	LVR-IC	7.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22H	-	XC6216B772PR	LVR-IC	7.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22H	-	XE6216B772PR	LVR-IC	7.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22K	-	XC6216B782PR	LVR-IC	7.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22K	-	XE6216B782PR	LVR-IC	7.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22L	-	XC6216B792PR	LVR-IC	7.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22L	-	XE6216B792PR	LVR-IC	7.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22M	-	XC6216B802PR	LVR-IC	8.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22M	-	XE6216B802PR	LVR-IC	8.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22N	-	XC6216B812PR	LVR-IC	8.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22N	-	XE6216B812PR	LVR-IC	8.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22P	-	TK11222BU	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
22P	-	XC6216B822PR	LVR-IC	8.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22P	-	XE6216B822PR	LVR-IC	8.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22Q	-	TK11322BU	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
22R	-	XC6216B832PR	LVR-IC	8.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22R	-	XE6216B832PR	LVR-IC	8.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22S	-	XC6216B842PR	LVR-IC	8.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22S	-	XE6216B842PR	LVR-IC	8.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22T	-	XC6216B852PR	LVR-IC	8.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22T	-	XE6216B852PR	LVR-IC	8.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22U	-	XC6216B862PR	LVR-IC	8.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22U	-	XE6216B862PR	LVR-IC	8.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22V	-	XC6216B872PR	LVR-IC	8.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22V	-	XE6216B872PR	LVR-IC	8.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22X	-	XC6216B882PR	LVR-IC	8.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22X	-	XE6216B882PR	LVR-IC	8.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22Y	-	XC6216B892PR	LVR-IC	8.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22Y	-	XE6216B892PR	LVR-IC	8.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
22Z	-	XC6216B902PR	LVR-IC	9.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
22Z	-	XE6216B902PR	LVR-IC	9.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23-	-	XC62HR2302PR-G	LVR-IC	LDO, 2.3V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
230	-	XC6216B912PR	LVR-IC	9.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
230	-	XE6216B912PR	LVR-IC	9.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
231	-	XC6216B922PR	LVR-IC	9.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
231	-	XE6216B922PR	LVR-IC	9.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
232	-	XC6216B932PR	LVR-IC	9.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
232	-	XE6216B932PR	LVR-IC	9.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
233	-	XC6216B942PR	LVR-IC	9.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
233	-	XE6216B942PR	LVR-IC	9.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
234	-	XC6216B952PR	LVR-IC	9.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
234	-	XE6216B952PR	LVR-IC	9.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
235	-	XC6216B962PR	LVR-IC	9.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
235	-	XE6216B962PR	LVR-IC	9.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
236	-	XC6216B972PR	LVR-IC	9.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
236	-	XE6216B972PR	LVR-IC	9.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
237	-	XC6216B982PR	LVR-IC	9.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
237	-	XE6216B982PR	LVR-IC	9.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
238	-	XC6216B992PR	LVR-IC	9.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
238	-	XE6216B992PR	LVR-IC	9.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
239	-	XC6216BA02PR	LVR-IC	10.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
239	-	XE6216BA02PR	LVR-IC	10.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23A	-	XC6216BA12PR	LVR-IC	10.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23A	-	XE6216BA12PR	LVR-IC	10.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23B	-	XC6216BA22PR	LVR-IC	10.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23B	-	XE6216BA22PR	LVR-IC	10.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23C	-	XC6216BA32PR	LVR-IC	10.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23C	-	XE6216BA32PR	LVR-IC	10.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23D	-	XC6216BA42PR	LVR-IC	10.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23D	-	XE6216BA42PR	LVR-IC	10.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23E	-	XC6216BA52PR	LVR-IC	10.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23E	-	XE6216BA52PR	LVR-IC	10.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23F	-	XC6216BA62PR	LVR-IC	10.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23F	-	XE6216BA62PR	LVR-IC	10.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23H	-	XC6216BA72PR	LVR-IC	10.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23H	-	XE6216BA72PR	LVR-IC	10.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23K	-	XC6216BA82PR	LVR-IC	10.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23K	-	XE6216BA82PR	LVR-IC	10.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23L	-	XC6216BA92PR	LVR-IC	10.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23L	-	XE6216BA92PR	LVR-IC	10.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23M	-	XC6216BB02PR	LVR-IC	11.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23M	-	XE6216BB02PR	LVR-IC	11.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23N	-	XC6216BB12PR	LVR-IC	11.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23N	-	XE6216BB12PR	LVR-IC	11.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23P	-	TK11223BU	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
23P	-	XC6216BB22PR	LVR-IC	11.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23P	-	XE6216BB22PR	LVR-IC	11.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23Q	-	TK11323BU	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
23R	-	XC6216BB32PR	LVR-IC	11.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23R	-	XE6216BB32PR	LVR-IC	11.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23S	-	XC6216BB42PR	LVR-IC	11.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23S	-	XE6216BB42PR	LVR-IC	11.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23T	-	XC6216BB52PR	LVR-IC	11.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23T	-	XE6216BB52PR	LVR-IC	11.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23U	-	XC6216BB62PR	LVR-IC	11.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23U	-	XE6216BB62PR	LVR-IC	11.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23V	-	XC6216BB72PR	LVR-IC	11.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23V	-	XE6216BB72PR	LVR-IC	11.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23X	-	XC6216BB82PR	LVR-IC	11.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23X	-	XE6216BB82PR	LVR-IC	11.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23Y	-	XC6216BB92PR	LVR-IC	11.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23Y	-	XE6216BB92PR	LVR-IC	11.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
23Z	-	XC6216BC02PR	LVR-IC	12.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
23Z	-	XE6216BC02PR	LVR-IC	12.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6p	Tor
24-	-	XC62HR2402PR-G	LVR-IC	LDO, 2.4V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
24P	-	TK11224BU	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
24Q	-	TK11324BU	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
25-	-	XC62HR2502PR-G	LVR-IC	LDO, 2.5V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
25P	-	TK11225BU	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
25Q	-	TK11325BU	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
26-	-	XC62HR2602PR-G	LVR-IC	LDO, 2.6V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
26P	-	TK11226BU	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
26Q	-	TK11326BU	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
27-	-	XC62HR2702PR-G	LVR-IC	LDO, 2.7V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
27P	-	TK11227BU	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
27Q	-	TK11327BU	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
28-	-	XC62HR2802PR-G	LVR-IC	LDO, 2.8V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
28P	-	TK11228BU	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
28Q	-	TK11328BU	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
29-	-	XC62HR2902PR-G	LVR-IC	LDO, 2.9V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
29P	-	TK11229BU	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
29Q	-	TK11329BU	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
30-	-	XC62HR3002PR-G	LVR-IC	LDO, 3.0V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
301	kg	XC6403AA01P	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
302	kg	XC6403AA02P	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
303	kg	XC6403AA03P	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
304	kg	XC6403AA04P	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
305	kg	XC6403AA05P	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
306	kg	XC6403AA06P	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
307	kg	XC6403AA07P	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
308	kg	XC6403AA08P	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
309	kg	XC6403AA09P	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
30P	-	TK11230BU	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
30Q	-	TK11330BU	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
31-	-	XC62HR3102PR-G	LVR-IC	LDO, 3.1V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
310	kg	XC6403AA10P	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
311	kg	XC6403AA11P	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
312	kg	XC6403AA12P	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
313	kg	XC6403AA13P	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
314	kg	XC6403AA14P	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
315	kg	XC6403AA15P	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
316	kg	XC6403AA16P	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
317	kg	XC6403AA17P	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
318	kg	XC6403AA18P	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
31P	-	TK11231BU	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
31Q	-	TK11331BU	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
32-	-	XC62HR3202PR-G	LVR-IC	LDO, 3.2V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
320	ka	XC6372E201P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
320	kg	XC6403AA20P	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
321	ka	XC6372E211P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
321	kg	XC6403AA21P	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
322	ka	XC6372E221P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
322	kg	XC6403AA22P	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
323	ka	XC6372E231P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
324	ka	XC6372E241P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
324	kg	XC6403AA24P	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
325	ka	XC6372E251P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
325	kg	XC6403AA25P	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
326	ka	XC6372E261P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
327	ka	XC6372E271P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
328	ka	XC6372E281P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
329	ka	XC6372E291P	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
32A	ka	XC6372E202P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
32B	ka	XC6372E212P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
32C	ka	XC6372E222P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
32D	ka	XC6372E232P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
32E	ka	XC6372E242P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
32F	ka	XC6372E252P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
32H	ka	XC6372E262P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
32K	ka	XC6372E272P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
32L	ka	XC6372E282P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
32M	ka	XC6372E292P	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
32P	-	TK11232BU	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
32Q	-	TK11332BU	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
33-	-	XC62HR3302PR-G	LVR-IC	LDO, 3.3V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
330	ka	XC6372E301P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
330	kg	XC6403AA30P	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
331	ka	XC6372E311P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
331	kg	XC6403AA31P	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
332	ka	XC6372E321P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
332	kg	XC6403AA32P	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
333	ka	XC6372E331P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
333	kg	XC6403AA33P	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
334	ka	XC6372E341P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
334	kg	XC6403AA34P	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
335	ka	XC6372E351P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
336	ka	XC6372E361P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
337	ka	XC6372E371P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
338	ka	XC6372E381P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
339	ka	XC6372E391P	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
33A	ka	XC6372E302P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
33B	ka	XC6372E312P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
33C	ka	XC6372E322P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
33D	ka	XC6372E332P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
33E	ka	XC6372E342P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
33F	ka	XC6372E352P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
33H	ka	XC6372E362P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
33K	ka	XC6372E372P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
33L	ka	XC6372E382P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
33M	ka	XC6372E392P	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
33P	-	TK11233BU	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
33Q	-	TK11333BU	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
34-	-	XC62HR3402PR-G	LVR-IC	LDO, 3.4V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
340	ka	XC6372E401P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
341	ka	XC6372E411P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
342	ka	XC6372E421P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
343	ka	XC6372E431P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
344	ka	XC6372E441P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
345	ka	XC6372E451P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
346	ka	XC6372E461P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
347	ka	XC6372E471P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
348	ka	XC6372E481P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
349	ka	XC6372E491P	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
34A	ka	XC6372E402P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
34B	ka	XC6372E412P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
34C	ka	XC6372E422P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
34D	ka	XC6372E432P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
34E	ka	XC6372E442P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
34F	ka	XC6372E452P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
34H	ka	XC6372E462P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
34K	ka	XC6372E472P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
34L	ka	XC6372E482P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
34M	ka	XC6372E492P	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
34P	-	TK11234BU	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
34Q	-	TK11334BU	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
35-	-	XC62HR3502PR-G	LVR-IC	LDO, 3.5V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
350	ka	XC6372E501P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
351	ka	XC6372E511P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
352	ka	XC6372E521P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
353	ka	XC6372E531P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
354	ka	XC6372E541P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
355	ka	XC6372E551P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
356	ka	XC6372E561P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
357	ka	XC6372E571P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
358	ka	XC6372E581P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
359	ka	XC6372E591P	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
35A	ka	XC6372E502P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
35B	ka	XC6372E512P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
35C	ka	XC6372E522P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
35D	ka	XC6372E532P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
35E	ka	XC6372E542P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
35F	ka	XC6372E552P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
35H	ka	XC6372E562P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
35K	ka	XC6372E572P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
35L	ka	XC6372E582P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
35M	ka	XC6372E592P	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
35P	-	TK11235BU	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
35Q	-	TK11335BU	LVR-IC	LDO, 3.5V ±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
36-	-	XC62HR3602PR-G	LVR-IC	LDO, 3.6V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
360	ka	XC6372E601P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
361	ka	XC6372E611P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
362	ka	XC6372E621P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
363	ka	XC6372E631P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
364	ka	XC6372E641P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
365	ka	XC6372E651P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
366	ka	XC6372E661P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
367	ka	XC6372E671P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
368	ka	XC6372E681P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
369	ka	XC6372E691P	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
36A	ka	XC6372E602P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
36B	ka	XC6372E612P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
36C	ka	XC6372E622P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
36D	ka	XC6372E632P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
36E	ka	XC6372E642P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
36F	ka	XC6372E652P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
36H	ka	XC6372E662P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
36K	ka	XC6372E672P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
36L	ka	XC6372E682P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
36M	ka	XC6372E692P	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
36P	-	TK11236BU	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
36Q	-	TK11336BU	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
37-	-	XC62HR3702PR-G	LVR-IC	LDO, 3.7V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
370	ka	XC6372E701P	DC-DC-IC	PWM/PFM step-up, 100kHz, 7.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
37A	ka	XC6372E702P	DC-DC-IC	PWM/PFM step-up, 180kHz, 7.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
37P	-	TK11237BU	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
37Q	-	TK11337BU	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
38-	-	XC62HR3802PR-G	LVR-IC	LDO, 3.8V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
380	kg	XC6403AA80P	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
381	kg	XC6403AA81P	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
382	kg	XC6403AA82P	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
383	kg	XC6403AA83P	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
384	kg	XC6403AA84P	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
385	kg	XC6403AA85P	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
386	kg	XC6403AA86P	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
387	kg	XC6403AA87P	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
388	kg	XC6403AA88P	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
38P	-	TK11238BU	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
38Q	-	TK11338BU	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
39-	-	XC62HR3902PR-G	LVR-IC	LDO, 3.9V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
39P	-	TK11239BU	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
39Q	-	TK11339BU	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
3A8	-	XC6227A081PR	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3A9	-	XC6227A091PR	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AA	-	XC6227A101PR	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AB	-	XC6227A111PR	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AC	-	XC6227A121PR	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AD	-	XC6227A131PR	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AE	-	XC6227A141PR	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AF	-	XC6227A151PR	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AH	-	XC6227A161PR	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AK	-	XC6227A171PR	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AL	-	XC6227A181PR	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AM	-	XC6227A191PR	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AN	-	XC6227A201PR	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AP	-	XC6227A211PR	LVR-IC	LDO, 2.1V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AR	-	XC6227A221PR	LVR-IC	LDO, 2.2V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AS	-	XC6227A231PR	LVR-IC	LDO, 2.3V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AT	-	XC6227A241PR	LVR-IC	LDO, 2.4V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AU	-	XC6227A251PR	LVR-IC	LDO, 2.5V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AV	-	XC6227A261PR	LVR-IC	LDO, 2.6V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AX	-	XC6227A271PR	LVR-IC	LDO, 2.7V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AY	-	XC6227A281PR	LVR-IC	LDO, 2.8V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3AZ	-	XC6227A291PR	LVR-IC	LDO, 2.9V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3B8	-	XC6227A08BPR	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3B9	-	XC6227A09BPR	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BA	-	XC6227A10BPR	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BB	-	XC6227A11BPR	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BC	-	XC6227A12BPR	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BD	-	XC6227A13BPR	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BE	-	XC6227A14BPR	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BF	-	XC6227A15BPR	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BH	-	XC6227A16BPR	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BK	-	XC6227A17BPR	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3BL	-	XC6227A18BPR	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BM	-	XC6227A19BPR	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BN	-	XC6227A20BPR	LVR-IC	LDO, 2.05V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BP	-	XC6227A21BPR	LVR-IC	LDO, 2.15V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BR	-	XC6227A22BPR	LVR-IC	LDO, 2.25V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BS	-	XC6227A23BPR	LVR-IC	LDO, 2.35V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BT	-	XC6227A24BPR	LVR-IC	LDO, 2.45V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BU	-	XC6227A25BPR	LVR-IC	LDO, 2.55V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BV	-	XC6227A26BPR	LVR-IC	LDO, 2.65V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BX	-	XC6227A27BPR	LVR-IC	LDO, 2.75V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BY	-	XC6227A28BPR	LVR-IC	LDO, 2.85V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3BZ	-	XC6227A29BPR	LVR-IC	LDO, 2.95V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3C0	-	XC6227A301PR	LVR-IC	LDO, 3.0V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3C0	ka	XC6372E200P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3C1	-	XC6227A311PR	LVR-IC	LDO, 3.1V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3C1	ka	XC6372E210P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3C2	-	XC6227A321PR	LVR-IC	LDO, 3.2V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3C2	ka	XC6372E220P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3C3	-	XC6227A331PR	LVR-IC	LDO, 3.3V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3C3	ka	XC6372E230P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3C4	-	XC6227A341PR	LVR-IC	LDO, 3.4V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3C4	ka	XC6372E240P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3C5	-	XC6227A351PR	LVR-IC	LDO, 3.5V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3C5	ka	XC6372E250P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3C6	-	XC6227A361PR	LVR-IC	LDO, 3.6V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3C6	ka	XC6372E260P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3C7	-	XC6227A371PR	LVR-IC	LDO, 3.7V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3C7	ka	XC6372E270P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3C8	-	XC6227A381PR	LVR-IC	LDO, 3.8V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3C8	ka	XC6372E280P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3C9	-	XC6227A391PR	LVR-IC	LDO, 3.9V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3C9	ka	XC6372E290P	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3CA	-	XC6227A401PR	LVR-IC	LDO, 4.0V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3CB	-	XC6227A411PR	LVR-IC	LDO, 4.1V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3CC	-	XC6227A421PR	LVR-IC	LDO, 4.2V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3CD	-	XC6227A431PR	LVR-IC	LDO, 4.3V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3CE	-	XC6227A441PR	LVR-IC	LDO, 4.4V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3CF	-	XC6227A451PR	LVR-IC	LDO, 4.5V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3CH	-	XC6227A461PR	LVR-IC	LDO, 4.6V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3CK	-	XC6227A471PR	LVR-IC	LDO, 4.7V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3CL	-	XC6227A481PR	LVR-IC	LDO, 4.8V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3CM	-	XC6227A491PR	LVR-IC	LDO, 4.9V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3CN	-	XC6227A501PR	LVR-IC	LDO, 5.0V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3D0	-	XC6227A30BPR	LVR-IC	LDO, 3.05V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3D0	ka	XC6372E300P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3D1	-	XC6227A31BPR	LVR-IC	LDO, 3.15V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3D1	ka	XC6372E310P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3D2	-	XC6227A32BPR	LVR-IC	LDO, 3.25V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3D2	ka	XC6372E320P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3D3	-	XC6227A33BPR	LVR-IC	LDO, 3.35V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3D3	ka	XC6372E330P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3D4	-	XC6227A34BPR	LVR-IC	LDO, 3.45V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3D4	ka	XC6372E340P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3D5	-	XC6227A35BPR	LVR-IC	LDO, 3.55V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3D5	ka	XC6372E350P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3D6	-	XC6227A36BPR	LVR-IC	LDO, 3.65V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3D6	ka	XC6372E360P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3D7	-	XC6227A37BPR	LVR-IC	LDO, 3.75V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3D7	ka	XC6372E370P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3D8	-	XC6227A38BPR	LVR-IC	LDO, 3.85V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3D8	ka	XC6372E380P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3D9	-	XC6227A39BPR	LVR-IC	LDO, 3.95V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3D9	ka	XC6372E390P	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3DA	-	XC6227A40BPR	LVR-IC	LDO, 4.05V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3DB	-	XC6227A41BPR	LVR-IC	LDO, 4.15V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3DC	-	XC6227A42BPR	LVR-IC	LDO, 4.25V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3DD	-	XC6227A43BPR	LVR-IC	LDO, 4.35V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3DE	-	XC6227A44BPR	LVR-IC	LDO, 4.45V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3DF	-	XC6227A45BPR	LVR-IC	LDO, 4.55V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3DH	-	XC6227A46BPR	LVR-IC	LDO, 4.65V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3DK	-	XC6227A47BPR	LVR-IC	LDO, 4.75V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3DL	-	XC6227A48BPR	LVR-IC	LDO, 4.85V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3DM	-	XC6227A49BPR	LVR-IC	LDO, 4.95V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
3E0	ka	XC6372E400P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3E1	ka	XC6372E410P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3E2	ka	XC6372E420P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3E3	ka	XC6372E430P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3E4	ka	XC6372E440P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3E5	ka	XC6372E450P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3E6	ka	XC6372E460P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3E7	ka	XC6372E470P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3E8	-	XC6227C081PR	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3E8	ka	XC6372E480P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3E9	-	XC6227C091PR	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3E9	ka	XC6372E490P	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3EA	-	XC6227C101PR	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3EB	-	XC6227C111PR	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3EC	-	XC6227C121PR	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3ED	-	XC6227C131PR	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3EE	-	XC6227C141PR	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3EF	-	XC6227C151PR	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3EH	-	XC6227C161PR	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3EK	-	XC6227C171PR	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3EL	-	XC6227C181PR	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3EM	-	XC6227C191PR	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3EN	-	XC6227C201PR	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3EP	-	XC6227C211PR	LVR-IC	LDO, 2.1V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3ER	-	XC6227C221PR	LVR-IC	LDO, 2.2V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3ES	-	XC6227C231PR	LVR-IC	LDO, 2.3V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3ET	-	XC6227C241PR	LVR-IC	LDO, 2.4V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3EU	-	XC6227C251PR	LVR-IC	LDO, 2.5V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3EV	-	XC6227C261PR	LVR-IC	LDO, 2.6V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3EX	-	XC6227C271PR	LVR-IC	LDO, 2.7V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3EY	-	XC6227C281PR	LVR-IC	LDO, 2.8V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3EZ	-	XC6227C291PR	LVR-IC	LDO, 2.9V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3F0	ka	XC6372E500P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3F1	ka	XC6372E510P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3F2	ka	XC6372E520P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3F3	ka	XC6372E530P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3F4	ka	XC6372E540P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3F5	ka	XC6372E550P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3F6	ka	XC6372E560P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3F7	ka	XC6372E570P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3F8	-	XC6227C08BPR	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3F8	ka	XC6372E580P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3F9	-	XC6227C09BPR	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3F9	ka	XC6372E590P	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3FA	-	XC6227C10BPR	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FB	-	XC6227C11BPR	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FC	-	XC6227C12BPR	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FD	-	XC6227C13BPR	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FE	-	XC6227C14BPR	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FF	-	XC6227C15BPR	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FH	-	XC6227C16BPR	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FK	-	XC6227C17BPR	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FL	-	XC6227C18BPR	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FM	-	XC6227C19BPR	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FN	-	XC6227C20BPR	LVR-IC	LDO, 2.05V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FP	-	XC6227C21BPR	LVR-IC	LDO, 2.15V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FR	-	XC6227C22BPR	LVR-IC	LDO, 2.25V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FS	-	XC6227C23BPR	LVR-IC	LDO, 2.35V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FT	-	XC6227C24BPR	LVR-IC	LDO, 2.45V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FU	-	XC6227C25BPR	LVR-IC	LDO, 2.55V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FV	-	XC6227C26BPR	LVR-IC	LDO, 2.65V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FX	-	XC6227C27BPR	LVR-IC	LDO, 2.75V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FY	-	XC6227C28BPR	LVR-IC	LDO, 2.85V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3FZ	-	XC6227C29BPR	LVR-IC	LDO, 2.95V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3H0	-	XC6227C301PR	LVR-IC	LDO, 3.0V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3H0	ka	XC6372E600P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3H1	-	XC6227C311PR	LVR-IC	LDO, 3.1V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3H1	ka	XC6372E610P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3H2	-	XC6227C321PR	LVR-IC	LDO, 3.2V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3H2	ka	XC6372E620P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3H3	-	XC6227C331PR	LVR-IC	LDO, 3.3V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3H3	ka	XC6372E630P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3H4	-	XC6227C341PR	LVR-IC	LDO, 3.4V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3H4	ka	XC6372E640P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3H5	-	XC6227C351PR	LVR-IC	LDO, 3.5V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3H5	ka	XC6372E650P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3H6	-	XC6227C361PR	LVR-IC	LDO, 3.6V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3H6	ka	XC6372E660P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3H7	-	XC6227C371PR	LVR-IC	LDO, 3.7V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3H7	ka	XC6372E670P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3H8	-	XC6227C381PR	LVR-IC	LDO, 3.8V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3H8	ka	XC6372E680P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3H9	-	XC6227C391PR	LVR-IC	LDO, 3.9V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3H9	ka	XC6372E690P	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3HA	-	XC6227C401PR	LVR-IC	LDO, 4.0V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3HB	-	XC6227C411PR	LVR-IC	LDO, 4.1V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3HC	-	XC6227C421PR	LVR-IC	LDO, 4.2V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3HD	-	XC6227C431PR	LVR-IC	LDO, 4.3V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3HE	-	XC6227C441PR	LVR-IC	LDO, 4.4V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3HF	-	XC6227C451PR	LVR-IC	LDO, 4.5V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3HH	-	XC6227C461PR	LVR-IC	LDO, 4.6V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3HK	-	XC6227C471PR	LVR-IC	LDO, 4.7V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3HL	-	XC6227C481PR	LVR-IC	LDO, 4.8V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3HM	-	XC6227C491PR	LVR-IC	LDO, 4.9V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3HN	-	XC6227C501PR	LVR-IC	LDO, 5.0V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3K0	-	XC6227C30BPR	LVR-IC	LDO, 3.05V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3K0	ka	XC6372E700P	DC-DC-IC	PWM/PFM step-up, 50kHz, 7.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
3K1	-	XC6227C31BPR	LVR-IC	LDO, 3.15V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3K2	-	XC6227C32BPR	LVR-IC	LDO, 3.25V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3K3	-	XC6227C33BPR	LVR-IC	LDO, 3.35V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3K4	-	XC6227C34BPR	LVR-IC	LDO, 3.45V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3K5	-	XC6227C35BPR	LVR-IC	LDO, 3.55V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3K6	-	XC6227C36BPR	LVR-IC	LDO, 3.65V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3K7	-	XC6227C37BPR	LVR-IC	LDO, 3.75V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3K8	-	XC6227C38BPR	LVR-IC	LDO, 3.85V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3K9	-	XC6227C39BPR	LVR-IC	LDO, 3.95V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3KA	-	XC6227C40BPR	LVR-IC	LDO, 4.05V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3KB	-	XC6227C41BPR	LVR-IC	LDO, 4.15V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3KC	-	XC6227C42BPR	LVR-IC	LDO, 4.25V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3KD	-	XC6227C43BPR	LVR-IC	LDO, 4.35V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3KE	-	XC6227C44BPR	LVR-IC	LDO, 4.45V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3KF	-	XC6227C45BPR	LVR-IC	LDO, 4.55V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3KH	-	XC6227C46BPR	LVR-IC	LDO, 4.65V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3KK	-	XC6227C47BPR	LVR-IC	LDO, 4.75V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3KL	-	XC6227C48BPR	LVR-IC	LDO, 4.85V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
3KM	-	XC6227C49BPR	LVR-IC	LDO, 4.95V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
40-	-	XC62HR4002PR-G	LVR-IC	LDO, 4.0V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
401	kj	XC6404AA01P	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
402	kj	XC6404AA02P	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
403	kj	XC6404AA03P	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
404	kj	XC6404AA04P	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
405	kj	XC6404AA05P	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
407	kj	XC6404AA07P	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
408	kj	XC6404AA08P	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
409	kj	XC6404AA09P	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
40P	-	TK11240BU	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
40Q	-	TK11340BU	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
41-	-	XC62HR4102PR-G	LVR-IC	LDO, 4.1V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
410	kj	XC6404AA10P	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
411	kj	XC6404AA11P	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
412	kj	XC6404AA12P	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
413	kj	XC6404AA13P	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
414	kj	XC6404AA14P	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
415	kj	XC6404AA15P	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
416	kj	XC6404AA16P	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
417	kj	XC6404AA17P	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
418	kj	XC6404AA18P	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
419	kj	XC6404AA19P	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
41P	-	TK11241BU	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
41Q	-	TK11341BU	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
42-	-	XC62HR4202PR-G	LVR-IC	LDO, 4.2V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
420	kj	XC6404AA20P	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
421	kj	XC6404AA21P	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
422	kj	XC6404AA22P	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
423	kj	XC6404AA23P	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
424	kj	XC6404AA24P	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
425	kj	XC6404AA25P	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
426	kj	XC6404AA26P	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
427	kj	XC6404AA27P	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
428	kj	XC6404AA28P	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
429	kj	XC6404AA29P	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
42P	-	TK11242BU	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
42Q	-	TK11342BU	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
43-	-	XC62HR4302PR-G	LVR-IC	LDO, 4.3V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
430	kj	XC6404AA30P	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
431	kj	XC6404AA31P	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
432	kj	XC6404AA32P	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
433	kj	XC6404AA33P	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
434	kj	XC6404AA34P	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
43P	-	TK11243BU	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
43Q	-	TK11343BU	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
44-	-	XC62HR4402PR-G	LVR-IC	LDO, 4.4V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
44P	-	TK11244BU	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
44Q	-	TK11344BU	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
45-	-	XC62HR4502PR-G	LVR-IC	LDO, 4.5V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
45P	-	TK11245BU	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
45Q	-	TK11345BU	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
46-	-	XC62HR4602PR-G	LVR-IC	LDO, 4.6V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
46P	-	TK11246BU	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
46Q	-	TK11346BU	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
47-	-	XC62HR4702PR-G	LVR-IC	LDO, 4.7V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
47P	-	TK11247BU	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
47Q	-	TK11347BU	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
48-	-	XC62HR4802PR-G	LVR-IC	LDO, 4.8V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
480	kj	XC6404AA80P	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
481	kj	XC6404AA81P	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
482	kj	XC6404AA82P	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
483	kj	XC6404AA83P	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
484	kj	XC6404AA84P	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
485	kj	XC6404AA85P	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
486	kj	XC6404AA86P	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
487	kj	XC6404AA87P	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
488	kj	XC6404AA88P	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE, PDR	SOT-89-5	32hk	VR15	6h	Tor
48P	-	TK11248BU	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
48Q	-	TK11348BU	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
49-	-	XC62HR4902PR-G	LVR-IC	LDO, 4.9V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
49P	-	TK11249BU	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
49Q	-	TK11349BU	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
4A0	-	XC6204A312PR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4A1	-	XC6204A322PR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4A2	-	XC6204A332PR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4A3	-	XC6204A342PR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4A4	-	XC6204A352PR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4A5	-	XC6204A362PR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4A6	-	XC6204A372PR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4A7	-	XC6204A382PR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4A8	-	XC6204A392PR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4A9	-	XC6204A402PR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AA	-	FT521AAb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/1.2V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4AA	-	XC6204A412PR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AB	-	FT521ABb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/1.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4AB	-	XC6204A422PR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AC	-	FT521ACb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/1.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4AC	-	XC6204A432PR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AD	-	FT521ADb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/1.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4AD	-	XC6204A442PR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AE	-	FT521AEb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/2.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4AE	-	XC6204A452PR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AF	-	FT521AFb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/2.7V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4AF	-	XC6204A462PR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AG	-	FT521AGb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/2.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4AH	-	FT521AHb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/2.85V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4AH	-	XC6204A472PR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AI	-	FT521AIb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/3.0V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4AJ	-	FT521AJb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/3.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4AK	-	FT521AKb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/3.6V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4AK	-	XC6204A482PR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AL	-	XC6204A492PR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AM	-	XC6204A502PR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AN	-	XC6204A512PR	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AP	-	XC6204A522PR	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AR	-	XC6204A532PR	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AS	-	XC6204A542PR	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AT	-	XC6204A552PR	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AU	-	XC6204A562PR	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AV	-	XC6204A572PR	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AX	-	XC6204A582PR	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AY	-	XC6204A592PR	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4AZ	-	XC6204A602PR	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4B0	-	XC6204B312PR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4B1	-	XC6204B322PR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4B2	-	XC6204B332PR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4B3	-	XC6204B342PR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4B4	-	XC6204B352PR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4B5	-	XC6204B362PR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4B6	-	XC6204B372PR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4B7	-	XC6204B382PR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4B8	-	XC6204B392PR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4B9	-	XC6204B402PR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BA	-	FT521BAb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/1.2V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4BA	-	XC6204B412PR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BB	-	FT521BBb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/1.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4BB	-	XC6204B422PR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BC	-	FT521BCb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/1.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4BC	-	XC6204B432PR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BD	-	FT521BDb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/1.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4BD	-	XC6204B442PR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BE	-	FT521BEb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/2.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4BE	-	XC6204B452PR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BF	-	FT521BFb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/2.7V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4BF	-	XC6204B462PR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BG	-	FT521BGb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/2.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4BH	-	FT521BHb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/2.85V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4BH	-	XC6204B472PR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BI	-	FT521BIb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/3.0V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4BJ	-	FT521BJb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/3.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4BK	-	FT521BKb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/3.6V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4BK	-	XC6204B482PR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BL	-	XC6204B492PR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BM	-	XC6204B502PR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BN	-	XC6204B512PR	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BP	-	XC6204B522PR	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BR	-	XC6204B532PR	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BS	-	XC6204B542PR	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BT	-	XC6204B552PR	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BU	-	XC6204B562PR	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BV	-	XC6204B572PR	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BX	-	XC6204B582PR	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BY	-	XC6204B592PR	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4BZ	-	XC6204B602PR	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4C0	-	XC6204C312PR	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4C1	-	XC6204C322PR	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4C2	-	XC6204C332PR	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4C3	-	XC6204C342PR	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4C4	-	XC6204C352PR	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4C5	-	XC6204C362PR	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4C6	-	XC6204C372PR	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4C7	-	XC6204C382PR	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4C8	-	XC6204C392PR	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4C9	-	XC6204C402PR	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CA	-	FT521CAb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.2V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4CA	-	XC6204C412PR	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CB	-	FT521CBb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4CB	-	XC6204C422PR	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CC	-	FT521CCb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4CC	-	XC6204C432PR	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CD	-	FT521CDb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4CD	-	XC6204C442PR	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CE	-	FT521CEb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/2.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4CE	-	XC6204C452PR	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CF	-	FT521CFb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/2.7V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4CF	-	XC6204C462PR	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CG	-	FT521CGb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/2.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4CH	-	FT521CHb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/2.85V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4CH	-	XC6204C472PR	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CI	-	FT521CIb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/3.0V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4CJ	-	FT521CJb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/3.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4CK	-	FT521CKb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/3.6V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4CK	-	XC6204C482PR	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CL	-	XC6204C492PR	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CM	-	XC6204C502PR	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CN	-	XC6204C512PR	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CP	-	XC6204C522PR	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CR	-	XC6204C532PR	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CS	-	XC6204C542PR	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CT	-	XC6204C552PR	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CU	-	XC6204C562PR	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CV	-	XC6204C572PR	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CX	-	XC6204C582PR	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CY	-	XC6204C592PR	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4CZ	-	XC6204C602PR	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4D0	-	XC6204D312PR	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4D1	-	XC6204D322PR	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4D2	-	XC6204D332PR	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4D3	-	XC6204D342PR	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4D4	-	XC6204D352PR	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4D5	-	XC6204D362PR	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4D6	-	XC6204D372PR	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4D7	-	XC6204D382PR	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4D8	-	XC6204D392PR	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4D9	-	XC6204D402PR	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DA	-	FT521DAb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.2V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4DA	-	XC6204D412PR	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DB	-	FT521DBb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4DB	-	XC6204D422PR	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DC	-	FT521DCb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4DC	-	XC6204D432PR	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DD	-	FT521DDb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4DD	-	XC6204D442PR	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DE	-	FT521DEb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4DE	-	XC6204D452PR	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DF	-	FT521DFb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.7V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4DF	-	XC6204D462PR	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DG	-	FT521DGb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4DH	-	FT521DHb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.85V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4DH	-	XC6204D472PR	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DI	-	FT521DIb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/3.0V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4DJ	-	FT521DJb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/3.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4DK	-	FT521DKb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/3.6V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4DK	-	XC6204D482PR	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DL	-	XC6204D492PR	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DM	-	XC6204D502PR	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DN	-	XC6204D512PR	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DP	-	XC6204D522PR	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DR	-	XC6204D532PR	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DS	-	XC6204D542PR	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DT	-	XC6204D552PR	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4DU	-	XC6204D562PR	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DV	-	XC6204D572PR	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DX	-	XC6204D582PR	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DY	-	XC6204D592PR	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4DZ	-	XC6204D602PR	LVR-IC	LDO, .0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4EA	-	FT521EAb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.2V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4EB	-	FT521EBb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4EC	-	FT521ECb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4ED	-	FT521EDb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4EE	-	FT521EEb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4EF	-	FT521EFb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.7V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4EG	-	FT521EGb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4EH	-	FT521EHb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.85V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4EI	-	FT521EIb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/3.0V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4EJ	-	FT521EJb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/3.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4EK	-	FT521EKb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/3.6V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4EK	-	XC6204A18APR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4EL	-	XC6204A19APR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4EM	-	XC6204A20APR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4EN	-	XC6204A21APR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4EP	-	XC6204A22APR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4ER	-	XC6204A23APR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4ES	-	XC6204A24APR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4ET	-	XC6204A25APR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4EU	-	XC6204A26APR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4EV	-	XC6204A27APR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4EX	-	XC6204A28APR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4EY	-	XC6204A29APR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4EZ	-	XC6204A30APR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4FA	-	FT521FAb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/1.2V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4FB	-	FT521FBb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/1.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4FC	-	FT521FCb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/1.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4FD	-	FT521FDb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/1.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4FE	-	FT521FEb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4FF	-	FT521FFb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.7V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4FG	-	FT521FGb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4FH	-	FT521FHb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.85V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4FI	-	FT521FIb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/3.0V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4FJ	-	FT521FJb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/3.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4FK	-	FT521FKb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/3.6V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4FK	-	XC6204B18APR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4FL	-	XC6204B19APR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4FM	-	XC6204B20APR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4FN	-	XC6204B21APR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4FP	-	XC6204B22APR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4FR	-	XC6204B23APR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4FS	-	XC6204B24APR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4FT	-	XC6204B25APR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4FU	-	XC6204B26APR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4FV	-	XC6204B27APR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4FX	-	XC6204B28APR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4FY	-	XC6204B29APR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4FZ	-	XC6204B30APR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4GA	-	FT521GAb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.2V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4GB	-	FT521GBb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4GC	-	FT521GCb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4GD	-	FT521GDb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4GE	-	FT521GEb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4GF	-	FT521GFb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.7V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4GG	-	FT521GGb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4GH	-	FT521GHb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.85V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4GI	-	FT521GIb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/3.0V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4GJ	-	FT521GJb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/3.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4GK	-	FT521GKb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/3.6V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4HA	-	FT521HAb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.2V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4HB	-	FT521HBb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4HC	-	FT521HCb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4HD	-	FT521HDb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4HE	-	FT521HEb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4HF	-	FT521HFb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.7V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4HG	-	FT521HGb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4HH	-	FT521HHb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.85V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4HI	-	FT521HIb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/3.0V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4HJ	-	FT521HJb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/3.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4HK	-	FT521HKb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/3.6V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4HK	-	XC6204C18APR	LVR-IC	LDO, 1.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4HL	-	XC6204C19APR	LVR-IC	LDO, 1.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4HM	-	XC6204C20APR	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4HN	-	XC6204C21APR	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4HP	-	XC6204C22APR	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4HR	-	XC6204C23APR	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4HS	-	XC6204C24APR	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4HT	-	XC6204C25APR	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4HU	-	XC6204C26APR	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4HV	-	XC6204C27APR	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4HX	-	XC6204C28APR	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4HY	-	XC6204C29APR	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4HZ	-	XC6204C30APR	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4IA	-	FT521IAb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.2V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4IB	-	FT521IBb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4IC	-	FT521ICb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4ID	-	FT521IDb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4IE	-	FT521IEb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4IF	-	FT521IFb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.7V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4IG	-	FT521IGb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4IH	-	FT521IHb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.85V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4II	-	FT521IIb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4IJ	-	FT521IJb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4IK	-	FT521IKb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.6V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4JA	-	FT521JAb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.2V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4JB	-	FT521JBb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4JC	-	FT521JCb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4JD	-	FT521JDb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4JE	-	FT521JEb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4JF	-	FT521JFb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.7V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4JG	-	FT521JGb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4JH	-	FT521JHb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.85V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4JI	-	FT521JIb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.0V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4JJ	-	FT521JJb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4JK	-	FT521JKb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.6V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4KA	-	FT521KAb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/1.2V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4KB	-	FT521KBb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/1.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4KC	-	FT521KCb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/1.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4KD	-	FT521KDb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/1.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4KE	-	FT521KEb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/2.5V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4KF	-	FT521KFb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/2.7V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4KG	-	FT521KGb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/2.8V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4KH	-	FT521KHb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/2.85V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4KI	-	FT521KIb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/3.0V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4KJ	-	FT521KJb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/3.3V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4KK	-	FT521KKb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/3.6V±2%, 250mA, +CE	SOT-89-5	32zw	VR19	6s	Fmd
4KK	-	XC6204D18APR	LVR-IC	LDO, 1.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4KL	-	XC6204D19APR	LVR-IC	LDO, 1.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4KM	-	XC6204D20APR	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4KN	-	XC6204D21APR	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4KP	-	XC6204D22APR	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4KR	-	XC6204D23APR	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4KS	-	XC6204D24APR	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4KT	-	XC6204D25APR	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4KU	-	XC6204D26APR	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4KV	-	XC6204D27APR	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4KX	-	XC6204D28APR	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4KY	-	XC6204D29APR	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4KZ	-	XC6204D30APR	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4L0	-	XC6204A31APR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4L1	-	XC6204A32APR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4L2	-	XC6204A33APR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4L3	-	XC6204A34APR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4L4	-	XC6204A35APR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4L5	-	XC6204A36APR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4L6	-	XC6204A37APR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4L7	-	XC6204A38APR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4L8	-	XC6204A39APR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4L9	-	XC6204A40APR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LA	-	XC6204A41APR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LB	-	XC6204A42APR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LC	-	XC6204A43APR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LD	-	XC6204A44APR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LE	-	XC6204A45APR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LF	-	XC6204A46APR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LH	-	XC6204A47APR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LK	-	XC6204A48APR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LL	-	XC6204A49APR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LM	-	XC6204A50APR	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LN	-	XC6204A51APR	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LP	-	XC6204A52APR	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LR	-	XC6204A53APR	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LS	-	XC6204A54APR	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LT	-	XC6204A55APR	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LU	-	XC6204A56APR	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LV	-	XC6204A57APR	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LX	-	XC6204A58APR	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4LY	-	XC6204A59APR	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4M0	-	XC6204B31APR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4M1	-	XC6204B32APR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4M2	-	XC6204B33APR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4M3	-	XC6204B34APR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4M4	-	XC6204B35APR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4M5	-	XC6204B36APR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4M6	-	XC6204B37APR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4M7	-	XC6204B38APR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4M8	-	XC6204B39APR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4M9	-	XC6204B40APR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MA	-	XC6204B41APR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MB	-	XC6204B42APR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MC	-	XC6204B43APR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MD	-	XC6204B44APR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4ME	-	XC6204B45APR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MF	-	XC6204B46APR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MH	-	XC6204B47APR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MK	-	XC6204B48APR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4ML	-	XC6204B49APR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MM	-	XC6204B50APR	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MN	-	XC6204B51APR	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MP	-	XC6204B52APR	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MR	-	XC6204B53APR	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MS	-	XC6204B54APR	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MT	-	XC6204B55APR	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MU	-	XC6204B56APR	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MV	-	XC6204B57APR	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MX	-	XC6204B58APR	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4MY	-	XC6204B59APR	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4N0	-	XC6204C31APR	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4N1	-	XC6204C32APR	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4N2	-	XC6204C33APR	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4N3	-	XC6204C34APR	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4N4	-	XC6204C35APR	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4N5	-	XC6204C36APR	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4N6	-	XC6204C37APR	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4N7	-	XC6204C38APR	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4N8	-	XC6204C39APR	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4N9	-	XC6204C40APR	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NA	-	XC6204C41APR	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NB	-	XC6204C42APR	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NC	-	XC6204C43APR	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4ND	-	XC6204C44APR	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NE	-	XC6204C45APR	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NF	-	XC6204C46APR	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NH	-	XC6204C47APR	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NK	-	XC6204C48APR	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4NL	-	XC6204C49APR	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NM	-	XC6204C50APR	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NN	-	XC6204C51APR	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NP	-	XC6204C52APR	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NR	-	XC6204C53APR	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NS	-	XC6204C54APR	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NT	-	XC6204C55APR	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NU	-	XC6204C56APR	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NV	-	XC6204C57APR	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NX	-	XC6204C58APR	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4NY	-	XC6204C59APR	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4P0	-	XC6204D31APR	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4P1	-	XC6204D32APR	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4P2	-	XC6204D33APR	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4P3	-	XC6204D34APR	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4P4	-	XC6204D35APR	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4P5	-	XC6204D36APR	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4P6	-	XC6204D37APR	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4P7	-	XC6204D38APR	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4P8	-	XC6204D39APR	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4P9	-	XC6204D40APR	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PA	-	XC6204D41APR	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PB	-	XC6204D42APR	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PC	-	XC6204D43APR	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PD	-	XC6204D44APR	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PE	-	XC6204D45APR	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PF	-	XC6204D46APR	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PH	-	XC6204D47APR	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PK	-	XC6204D48APR	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PL	-	XC6204D49APR	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PM	-	XC6204D50APR	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PN	-	XC6204D51APR	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PP	-	XC6204D52APR	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PR	-	XC6204D53APR	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PS	-	XC6204D54APR	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PT	-	XC6204D55APR	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PU	-	XC6204D56APR	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PV	-	XC6204D57APR	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PX	-	XC6204D58APR	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4PY	-	XC6204D59APR	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4VK	-	XC6204A182PR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4VL	-	XC6204A192PR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4VM	-	XC6204A202PR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4VN	-	XC6204A212PR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4VP	-	XC6204A222PR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4VR	-	XC6204A232PR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4VS	-	XC6204A242PR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4VT	-	XC6204A252PR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4VU	-	XC6204A262PR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4VV	-	XC6204A272PR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4VX	-	XC6204A282PR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4VY	-	XC6204A292PR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4VZ	-	XC6204A302PR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
4XK	-	XC6204B182PR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4XL	-	XC6204B192PR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4XM	-	XC6204B202PR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4XN	-	XC6204B212PR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4XP	-	XC6204B222PR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4XR	-	XC6204B232PR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4XS	-	XC6204B242PR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4XT	-	XC6204B252PR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4XU	-	XC6204B262PR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4XV	-	XC6204B272PR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4XX	-	XC6204B282PR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4XY	-	XC6204B292PR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4XZ	-	XC6204B302PR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
4YK	-	XC6204C182PR	LVR-IC	LDO, 1.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4YL	-	XC6204C192PR	LVR-IC	LDO, 1.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4YM	-	XC6204C202PR	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4YN	-	XC6204C212PR	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4YP	-	XC6204C222PR	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4YR	-	XC6204C232PR	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4YS	-	XC6204C242PR	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4YT	-	XC6204C252PR	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4YU	-	XC6204C262PR	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4YV	-	XC6204C272PR	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4YX	-	XC6204C282PR	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4YY	-	XC6204C292PR	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4YZ	-	XC6204C302PR	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
4ZK	-	XC6204D182PR	LVR-IC	LDO, 1.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4ZL	-	XC6204D192PR	LVR-IC	LDO, 1.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4ZM	-	XC6204D202PR	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4ZN	-	XC6204D212PR	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4ZP	-	XC6204D222PR	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4ZR	-	XC6204D232PR	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4ZS	-	XC6204D242PR	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4ZT	-	XC6204D252PR	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4ZU	-	XC6204D262PR	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4ZV	-	XC6204D272PR	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4ZX	-	XC6204D282PR	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4ZY	-	XC6204D292PR	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
4ZZ	-	XC6204D302PR	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
50-	-	XC62HR5002PR-G	LVR-IC	LDO, 5.0V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
50P	-	TK11250BU	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
50Q	-	TK11350BU	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
51-	-	XC62HR5102PR-G	LVR-IC	LDO, 5.1V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
52-	-	XC62HR5202PR-G	LVR-IC	LDO, 5.2V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
53-	-	XC62HR5302PR-G	LVR-IC	LDO, 5.3V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
54-	-	XC62HR5402PR-G	LVR-IC	LDO, 5.4V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
55-	-	XC62HR5502PR-G	LVR-IC	LDO, 5.5V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
55P	-	TK11255BU	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
55Q	-	TK11355BU	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
56-	-	XC62HR5602PR-G	LVR-IC	LDO, 5.6V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
57-	-	XC62HR5702PR-G	LVR-IC	LDO, 5.7V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
58-	-	XC62HR5802PR-G	LVR-IC	LDO, 5.8V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
59-	-	XC62HR5902PR-G	LVR-IC	LDO, 5.9V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
5E8	-	XC6205A09APR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5E9	-	XC6205A10APR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5EA	-	XC6205A11APR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5EB	-	XC6205A12APR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5EC	-	XC6205A13APR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5ED	-	XC6205A14APR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5EE	-	XC6205A15APR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5EF	-	XC6205A16APR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5EH	-	XC6205A17APR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5F8	-	XC6205B09APR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5F9	-	XC6205B10APR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5FA	-	XC6205B11APR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5FB	-	XC6205B12APR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5FC	-	XC6205B13APR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5FD	-	XC6205B14APR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5FE	-	XC6205B15APR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5FF	-	XC6205B16APR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5FH	-	XC6205B17APR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5H8	-	XC6205C09APR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5H9	-	XC6205C10APR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5HA	-	XC6205C11APR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5HB	-	XC6205C12APR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5HC	-	XC6205C13APR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5HD	-	XC6205C14APR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5HE	-	XC6205C15APR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5HF	-	XC6205C16APR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5HH	-	XC6205C17APR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5K8	-	XC6205D09APR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
5K9	-	XC6205D10APR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
5KA	-	XC6205D11APR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
5KB	-	XC6205D12APR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
5KC	-	XC6205D13APR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
5KD	-	XC6205D14APR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
5KE	-	XC6205D15APR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5KF	-	XC6205D16APR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
5KH	-	XC6205D17APR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
5V8	-	XC6205A092PR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5V9	-	XC6205A102PR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5VA	-	XC6205A112PR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5VB	-	XC6205A122PR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5VC	-	XC6205A132PR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5VD	-	XC6205A142PR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5VE	-	XC6205A152PR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5VF	-	XC6205A162PR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5VH	-	XC6205A172PR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
5X8	-	XC6205B092PR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5X9	-	XC6205B102PR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5XA	-	XC6205B112PR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5XB	-	XC6205B122PR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5XC	-	XC6205B132PR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5XD	-	XC6205B142PR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5XE	-	XC6205B152PR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5XF	-	XC6205B162PR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5XH	-	XC6205B172PR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
5Y8	-	XC6205C092PR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5Y9	-	XC6205C102PR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5YA	-	XC6205C112PR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5YB	-	XC6205C122PR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5YC	-	XC6205C132PR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5YD	-	XC6205C142PR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5YE	-	XC6205C152PR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5YF	-	XC6205C162PR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5YH	-	XC6205C172PR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
5Z8	-	XC6205D092PR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
5Z9	-	XC6205D102PR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
5ZA	-	XC6205D112PR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
5ZB	-	XC6205D122PR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
5ZC	-	XC6205D132PR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
5ZD	-	XC6205D142PR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
5ZE	-	XC6205D152PR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
5ZF	-	XC6205D162PR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
5ZH	-	XC6205D172PR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
60-	-	XC62HR6002PR-G	LVR-IC	LDO, 6.0V±2%, 165mA, +CE	SOT-89-5	32ew	VR4	6h	Tor
60P	-	TK11260BU	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
60Q	-	TK11360BU	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
7A0	-	XC6207A312PR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7A1	-	XC6207A322PR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7A2	-	XC6207A332PR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7A3	-	XC6207A342PR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7A4	-	XC6207A352PR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7A5	-	XC6207A362PR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7A6	-	XC6207A372PR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7A7	kf	XC6207A382PR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7A8	kf	XC6207A392PR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7A9	kf	XC6207A402PR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AA	-	XC6602A051PR-G	LVR-IC	LDO, 0.5V±15mV, 1A, +CE, soft start	SOT-89-5	32zl	VR11	6n	Tor
7AA	kf	XC6207A412PR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AB	-	XC6207A122PR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AB	-	XC6602A061PR-G	LVR-IC	LDO, 0.6V±15mV, 1A, +CE, soft start	SOT-89-5	32zl	VR11	6n	Tor
7AB	kf	XC6207A422PR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AC	-	XC6207A132PR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AC	-	XC6602A071PR-G	LVR-IC	LDO, 0.7V±15mV, 1A, +CE, soft start	SOT-89-5	32zl	VR11	6n	Tor
7AC	kf	XC6207A432PR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AD	-	XC6207A142PR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AD	-	XC6602A081PR-G	LVR-IC	LDO, 0.8V±15mV, 1A, +CE, soft start	SOT-89-5	32zl	VR11	6n	Tor
7AD	kf	XC6207A442PR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AE	-	XC6207A152PR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AE	-	XC6602A091PR-G	LVR-IC	LDO, 0.9V±15mV, 1A, +CE, soft start	SOT-89-5	32zl	VR11	6n	Tor
7AE	kf	XC6207A452PR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AF	-	XC6207A162PR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AF	-	XC6602A101PR-G	LVR-IC	LDO, 1.0V±15mV, 1A, +CE, soft start	SOT-89-5	32zl	VR11	6n	Tor
7AF	kf	XC6207A462PR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AH	-	XC6207A172PR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AH	-	XC6602A111PR-G	LVR-IC	LDO, 1.1V±15mV, 1A, +CE, soft start	SOT-89-5	32zl	VR11	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7AH	kf	XC6207A472PR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AK	-	XC6207A182PR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AK	-	XC6602A121PR-G	LVR-IC	LDO, 1.2V±20mV, 1A, +CE, soft start	SOT-89-5	32zl	VR11	6n	Tor
7AK	kf	XC6207A482PR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AL	-	XC6207A192PR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AL	-	XC6602A131PR-G	LVR-IC	LDO, 1.3V±20mV, 1A, +CE, soft start	SOT-89-5	32zl	VR11	6n	Tor
7AL	kf	XC6207A492PR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AM	-	XC6207A202PR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AM	-	XC6602A141PR-G	LVR-IC	LDO, 1.4V±20mV, 1A, +CE, soft start	SOT-89-5	32zl	VR11	6n	Tor
7AM	kf	XC6207A502PR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AN	-	XC6207A212PR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AN	-	XC6602A151PR-G	LVR-IC	LDO, 1.5V±20mV, 1A, +CE, soft start	SOT-89-5	32zl	VR11	6n	Tor
7AP	-	XC6207A222PR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AP	-	XC6602A161PR-G	LVR-IC	LDO, 1.6V±20mV, 1A, +CE, soft start	SOT-89-5	32zl	VR11	6n	Tor
7AR	-	XC6207A232PR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AR	-	XC6602A171PR-G	LVR-IC	LDO, 1.7V±20mV, 1A, +CE, soft start	SOT-89-5	32zl	VR11	6n	Tor
7AS	-	XC6207A242PR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AS	-	XC6602A181PR-G	LVR-IC	LDO, 1.8V±20mV, 1A, +CE, soft start	SOT-89-5	32zl	VR11	6n	Tor
7AT	-	XC6207A252PR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AU	-	XC6207A262PR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AV	-	XC6207A272PR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AX	-	XC6207A282PR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AY	-	XC6207A292PR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7AZ	-	XC6207A302PR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7B0	-	XC6207B312PR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7B1	-	XC6207B322PR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7B2	-	XC6207B332PR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7B3	-	XC6207B342PR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7B4	-	XC6207B352PR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7B5	-	XC6207B362PR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7B6	-	XC6207B372PR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7B7	kf	XC6207B382PR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7B8	kf	XC6207B392PR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7B9	kf	XC6207B402PR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BA	-	XC6602B051PR-G	LVR-IC	LDO, 0.5V±15mV, 1A, +CE	SOT-89-5	32zl	VR11	6n	Tor
7BA	kf	XC6207B412PR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BB	-	XC6207B122PR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BB	-	XC6602B061PR-G	LVR-IC	LDO, 0.6V±15mV, 1A, +CE	SOT-89-5	32zl	VR11	6n	Tor
7BB	kf	XC6207B422PR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BC	-	XC6207B132PR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BC	-	XC6602B071PR-G	LVR-IC	LDO, 0.7V±15mV, 1A, +CE	SOT-89-5	32zl	VR11	6n	Tor
7BC	kf	XC6207B432PR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BD	-	XC6207B142PR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BD	-	XC6602B081PR-G	LVR-IC	LDO, 0.8V±15mV, 1A, +CE	SOT-89-5	32zl	VR11	6n	Tor
7BD	kf	XC6207B442PR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BE	-	XC6207B152PR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BE	-	XC6602B091PR-G	LVR-IC	LDO, 0.9V±15mV, 1A, +CE	SOT-89-5	32zl	VR11	6n	Tor
7BE	kf	XC6207B452PR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BF	-	XC6207B162PR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BF	-	XC6602B101PR-G	LVR-IC	LDO, 1.0V±15mV, 1A, +CE	SOT-89-5	32zl	VR11	6n	Tor
7BF	kf	XC6207B462PR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BH	-	XC6207B172PR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BH	-	XC6602B111PR-G	LVR-IC	LDO, 1.1V±15mV, 1A, +CE	SOT-89-5	32zl	VR11	6n	Tor
7BH	kf	XC6207B472PR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BK	-	XC6207B182PR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BK	-	XC6602B121PR-G	LVR-IC	LDO, 1.2V±20mV, 1A, +CE	SOT-89-5	32zl	VR11	6n	Tor
7BK	kf	XC6207B482PR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BL	-	XC6207B192PR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BL	-	XC6602B131PR-G	LVR-IC	LDO, 1.3V±20mV, 1A, +CE	SOT-89-5	32zl	VR11	6n	Tor
7BL	kf	XC6207B492PR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BM	-	XC6207B202PR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BM	-	XC6602B141PR-G	LVR-IC	LDO, 1.4V±20mV, 1A, +CE	SOT-89-5	32zl	VR11	6n	Tor
7BM	kf	XC6207B502PR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BN	-	XC6207B212PR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BN	-	XC6602B151PR-G	LVR-IC	LDO, 1.5V±20mV, 1A, +CE	SOT-89-5	32zl	VR11	6n	Tor
7BP	-	XC6207B222PR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BP	-	XC6602B161PR-G	LVR-IC	LDO, 1.6V±20mV, 1A, +CE	SOT-89-5	32zl	VR11	6n	Tor
7BR	-	XC6207B232PR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BR	-	XC6602B171PR-G	LVR-IC	LDO, 1.7V±20mV, 1A, +CE	SOT-89-5	32zl	VR11	6n	Tor
7BS	-	XC6207B242PR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7BS	-	XC6602B181PR-G	LVR-IC	LDO, 1.8V±20mV, 1A, +CE	SOT-89-5	32zl	VR11	6n	Tor
7BT	-	XC6207B252PR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BU	-	XC6207B262PR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BV	-	XC6207B272PR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BX	-	XC6207B282PR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BY	-	XC6207B292PR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7BZ	-	XC6207B302PR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7N0	-	XC6207A31APR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7N1	-	XC6207A32APR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7N2	-	XC6207A33APR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7N3	-	XC6207A34APR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7N4	-	XC6207A35APR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7N5	-	XC6207A36APR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7N6	-	XC6207A37APR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7N7	kf	XC6207A38APR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7N8	kf	XC6207A39APR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7N9	kf	XC6207A40APR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NA	kf	XC6207A41APR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NB	-	XC6207A12APR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NB	kf	XC6207A42APR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NC	-	XC6207A13APR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NC	kf	XC6207A43APR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7ND	-	XC6207A14APR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7ND	kf	XC6207A44A2PR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NE	-	XC6207A15APR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NE	kf	XC6207A45APR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NF	-	XC6207A16APR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NF	kf	XC6207A46APR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NH	-	XC6207A17APR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NH	kf	XC6207A47APR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NK	-	XC6207A18APR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NK	kf	XC6207A48APR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NL	-	XC6207A19APR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NL	kf	XC6207A49APR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NM	-	XC6207A20APR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NN	-	XC6207A21APR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NP	-	XC6207A22APR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NR	-	XC6207A23APR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NS	-	XC6207A24APR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NT	-	XC6207A25APR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NU	-	XC6207A26APR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NV	-	XC6207A27APR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NX	-	XC6207A28APR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NY	-	XC6207A29APR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7NZ	-	XC6207A30APR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7P0	-	XC6207B31APR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7P1	-	XC6207B32APR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7P2	-	XC6207B33APR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7P3	-	XC6207B34APR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7P4	-	XC6207B35APR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7P5	-	XC6207B36APR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7P6	-	XC6207B37APR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7P7	kf	XC6207B38APR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7P8	kf	XC6207B39APR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7P9	kf	XC6207B40APR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PA	kf	XC6207B41APR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PB	-	XC6207B12APR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PB	kf	XC6207B42APR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PC	-	XC6207B13APR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PC	kf	XC6207B43APR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PD	-	XC6207B14APR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PD	kf	XC6207B44APR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PE	-	XC6207B15APR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PE	kf	XC6207B45APR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PF	-	XC6207B16APR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PF	kf	XC6207B46APR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PH	-	XC6207B17APR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PH	kf	XC6207B47APR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PK	-	XC6207B18APR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PK	kf	XC6207B48APR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7PL	-	XC6207B19APR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PL	kf	XC6207B49APR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PM	-	XC6207B20APR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PN	-	XC6207B21APR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PP	-	XC6207B22APR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PR	-	XC6207B23APR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PS	-	XC6207B24APR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PT	-	XC6207B25APR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PU	-	XC6207B26APR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PV	-	XC6207B27APR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PX	-	XC6207B28APR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PY	-	XC6207B29APR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
7PZ	-	XC6207B30APR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, CL, Shutdown	SOT-89-5	32cw	VR4a	6h	Tor
80P	-	TK11280BU	LVR-IC	LDO, 8V±2%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
80Q	-	TK11380BU	LVR-IC	LDO, 8V±2%, 150mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
80Z	-	MCP1804T-3002I/MT	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-89-5	32vrg	VR4	6s	Mcc
81K	-	XC6701B18PR	LVR-IC	1.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
81L	-	XC6701B19PR	LVR-IC	1.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
81M	-	XC6701B20PR	LVR-IC	2.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
81N	-	XC6701B21PR	LVR-IC	2.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
81P	-	XC6701B22PR	LVR-IC	2.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
81R	-	XC6701B23PR	LVR-IC	2.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
81S	-	XC6701B24PR	LVR-IC	2.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
81T	-	XC6701B25PR	LVR-IC	2.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
81U	-	XC6701B26PR	LVR-IC	2.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
81V	-	XC6701B27PR	LVR-IC	2.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
81X	-	XC6701B28PR	LVR-IC	2.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
81Y	-	XC6701B29PR	LVR-IC	2.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
81Z	-	XC6701B30PR	LVR-IC	3.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
820	-	XC6701B31PR	LVR-IC	3.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
821	-	XC6701B32PR	LVR-IC	3.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
822	-	XC6701B33PR	LVR-IC	3.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
823	-	XC6701B34PR	LVR-IC	3.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
824	-	XC6701B35PR	LVR-IC	3.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
825	-	XC6701B36PR	LVR-IC	3.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
826	-	XC6701B37PR	LVR-IC	3.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
827	-	XC6701B38PR	LVR-IC	3.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
828	-	XC6701B39PR	LVR-IC	3.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
829	-	XC6701B40PR	LVR-IC	4.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82A	-	XC6701B41PR	LVR-IC	4.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82B	-	XC6701B42PR	LVR-IC	4.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82C	-	XC6701B43PR	LVR-IC	4.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82D	-	XC6701B44PR	LVR-IC	4.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82E	-	XC6701B45PR	LVR-IC	4.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82F	-	XC6701B46PR	LVR-IC	4.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82H	-	XC6701B47PR	LVR-IC	4.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82K	-	XC6701B48PR	LVR-IC	4.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82L	-	XC6701B49PR	LVR-IC	4.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82M	-	XC6701B50PR	LVR-IC	5.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82N	-	XC6701B51PR	LVR-IC	5.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82P	-	XC6701B52PR	LVR-IC	5.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82R	-	XC6701B53PR	LVR-IC	5.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82S	-	XC6701B54PR	LVR-IC	5.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82T	-	XC6701B55PR	LVR-IC	5.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82U	-	XC6701B56PR	LVR-IC	5.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82V	-	XC6701B57PR	LVR-IC	5.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82X	-	XC6701B58PR	LVR-IC	5.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82Y	-	XC6701B59PR	LVR-IC	5.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
82Z	-	XC6701B60PR	LVR-IC	6.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
830	-	XC6701B61PR	LVR-IC	6.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
831	-	XC6701B62PR	LVR-IC	6.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
832	-	XC6701B63PR	LVR-IC	6.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
833	-	XC6701B64PR	LVR-IC	6.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
834	-	XC6701B65PR	LVR-IC	6.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
835	-	XC6701B66PR	LVR-IC	6.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
836	-	XC6701B67PR	LVR-IC	6.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
837	-	XC6701B68PR	LVR-IC	6.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
838	-	XC6701B69PR	LVR-IC	6.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
839	-	XC6701B70PR	LVR-IC	7.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83A	-	XC6701B71PR	LVR-IC	7.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
83B	-	XC6701B72PR	LVR-IC	7.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83C	-	XC6701B73PR	LVR-IC	7.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83D	-	XC6701B74PR	LVR-IC	7.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83E	-	XC6701B75PR	LVR-IC	7.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83F	-	XC6701B76PR	LVR-IC	7.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83H	-	XC6701B77PR	LVR-IC	7.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83K	-	XC6701B78PR	LVR-IC	7.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83L	-	XC6701B79PR	LVR-IC	7.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83M	-	XC6701B80PR	LVR-IC	8.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83N	-	XC6701B81PR	LVR-IC	8.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83P	-	XC6701B82PR	LVR-IC	8.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83R	-	XC6701B83PR	LVR-IC	8.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83S	-	XC6701B84PR	LVR-IC	8.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83T	-	XC6701B85PR	LVR-IC	8.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83U	-	XC6701B86PR	LVR-IC	8.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83V	-	XC6701B87PR	LVR-IC	8.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83X	-	XC6701B88PR	LVR-IC	8.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83Y	-	XC6701B89PR	LVR-IC	8.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
83Z	-	MCP1804T-C002I/MT	LVR-IC	LDO, 12.0V±2%, 150mA, +CE	SOT-89-5	32vrg	VR4	6s	Mcc
83Z	-	XC6701B90PR	LVR-IC	9.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
840	-	XC6701B91PR	LVR-IC	9.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
841	-	XC6701B92PR	LVR-IC	9.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
842	-	MCP1804T-3302I/MT	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-89-5	32vrg	VR4	6s	Mcc
842	-	XC6701B93PR	LVR-IC	9.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
843	-	XC6701B94PR	LVR-IC	9.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
844	-	XC6701B95PR	LVR-IC	9.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
845	-	XC6701B96PR	LVR-IC	9.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
846	-	XC6701B97PR	LVR-IC	9.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
847	-	XC6701B98PR	LVR-IC	9.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
848	-	XC6701B99PR	LVR-IC	9.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
849	-	MCP1804T-A002I/MT	LVR-IC	LDO, 10.0V±2%, 150mA, +CE	SOT-89-5	32vrg	VR4	6s	Mcc
849	-	XC6701BA0PR	LVR-IC	10.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84A	-	XC6701BA1PR	LVR-IC	10.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84B	-	XC6701BA2PR	LVR-IC	10.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84C	-	XC6701BA3PR	LVR-IC	10.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84D	-	XC6701BA4PR	LVR-IC	10.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84E	-	XC6701BA5PR	LVR-IC	10.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84F	-	XC6701BA6PR	LVR-IC	10.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84H	-	XC6701BA7PR	LVR-IC	10.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84K	-	MCP1804T-1802I/MT	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-89-5	32vrg	VR4	6s	Mcc
84K	-	XC6701BA8PR	LVR-IC	10.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84L	-	XC6701BA9PR	LVR-IC	10.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84M	-	MCP1804T-5002I/MT	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-89-5	32vrg	VR4	6s	Mcc
84M	-	XC6701BB0PR	LVR-IC	11.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84N	-	XC6701BB1PR	LVR-IC	11.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84P	-	XC6701BB2PR	LVR-IC	11.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84R	-	XC6701BB3PR	LVR-IC	11.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84S	-	XC6701BB4PR	LVR-IC	11.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84T	-	MCP1804T-2502I/MT	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-89-5	32vrg	VR4	6s	Mcc
84T	-	XC6701BB5PR	LVR-IC	11.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84U	-	XC6701BB6PR	LVR-IC	11.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84V	-	XC6701BB7PR	LVR-IC	11.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84X	-	XC6701BB8PR	LVR-IC	11.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84Y	-	XC6701BB9PR	LVR-IC	11.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
84Z	-	XC6701BC0PR	LVR-IC	12.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8A0	-	XC6701BC1PR	LVR-IC	12.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8A1	-	XC6701BC2PR	LVR-IC	12.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8A2	-	XC6701BC3PR	LVR-IC	12.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8A3	-	XC6701BC4PR	LVR-IC	12.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8A4	-	XC6701BC5PR	LVR-IC	12.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8A5	-	XC6701BC6PR	LVR-IC	12.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8A6	-	XC6701BC7PR	LVR-IC	12.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8A7	-	XC6701BC8PR	LVR-IC	12.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8A8	-	XC6701BC9PR	LVR-IC	12.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8A9	-	XC6701BD0PR	LVR-IC	13.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AA	-	XC6701BD1PR	LVR-IC	13.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AB	-	XC6701BD2PR	LVR-IC	13.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AC	-	XC6701BD3PR	LVR-IC	13.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AD	-	XC6701BD4PR	LVR-IC	13.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AE	-	XC6701BD5PR	LVR-IC	13.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8AF	-	XC6701BD6PR	LVR-IC	13.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AH	-	XC6701BD7PR	LVR-IC	13.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AK	-	XC6701BD8PR	LVR-IC	13.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AL	-	XC6701BD9PR	LVR-IC	13.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AM	-	XC6701BE0PR	LVR-IC	14.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AN	-	XC6701BE1PR	LVR-IC	14.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AP	-	XC6701BE2PR	LVR-IC	14.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AR	-	XC6701BE3PR	LVR-IC	14.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AS	-	XC6701BE4PR	LVR-IC	14.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AT	-	XC6701BE5PR	LVR-IC	14.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AU	-	XC6701BE6PR	LVR-IC	14.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AV	-	XC6701BE7PR	LVR-IC	14.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AX	-	XC6701BE8PR	LVR-IC	14.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AY	-	XC6701BE9PR	LVR-IC	14.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8AZ	-	XC6701BF0PR	LVR-IC	15.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8B0	-	XC6701BF1PR	LVR-IC	15.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8B1	-	XC6701BF2PR	LVR-IC	15.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8B2	-	XC6701BF3PR	LVR-IC	15.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8B3	-	XC6701BF4PR	LVR-IC	15.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8B4	-	XC6701BF5PR	LVR-IC	15.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8B5	-	XC6701BF6PR	LVR-IC	15.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8B6	-	XC6701BF7PR	LVR-IC	15.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8B7	-	XC6701BF8PR	LVR-IC	15.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8B8	-	XC6701BF9PR	LVR-IC	15.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8B9	-	XC6701BG0PR	LVR-IC	16.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BA	-	XC6701BG1PR	LVR-IC	16.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BB	-	XC6701BG2PR	LVR-IC	16.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BC	-	XC6701BG3PR	LVR-IC	16.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BD	-	XC6701BG4PR	LVR-IC	16.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BE	-	XC6701BG5PR	LVR-IC	16.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BF	-	XC6701BG6PR	LVR-IC	16.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BH	-	XC6701BG7PR	LVR-IC	16.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BK	-	XC6701BG8PR	LVR-IC	16.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BL	-	XC6701BG9PR	LVR-IC	16.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BM	-	XC6701BH0PR	LVR-IC	17.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BN	-	XC6701BH1PR	LVR-IC	17.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BP	-	XC6701BH2PR	LVR-IC	17.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BR	-	XC6701BH3PR	LVR-IC	17.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BS	-	XC6701BH4PR	LVR-IC	17.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BT	-	XC6701BH5PR	LVR-IC	17.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BU	-	XC6701BH6PR	LVR-IC	17.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BV	-	XC6701BH7PR	LVR-IC	17.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BX	-	XC6701BH8PR	LVR-IC	17.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BY	-	XC6701BH9PR	LVR-IC	17.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
8BZ	-	XC6701BJ0PR	LVR-IC	18.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6n	Tor
902	-	XC6223G121PR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
903	-	XC6223G131PR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
904	-	XC6223G141PR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
905	-	XC6223G151PR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
906	-	XC6223G161PR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
907	-	XC6223G171PR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
908	-	XC6223G181PR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
909	-	XC6223G191PR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90A	-	XC6223G201PR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90B	-	XC6223G211PR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90C	-	XC6223G221PR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90D	-	XC6223G231PR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90E	-	XC6223G241PR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90F	-	XC6223G251PR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90H	-	XC6223G261PR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90K	-	XC6223G271PR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90L	-	XC6223G281PR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90M	-	XC6223G291PR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90N	-	XC6223G301PR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90P	-	XC6223G311PR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90R	-	XC6223G321PR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90S	-	XC6223G331PR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90T	-	XC6223G341PR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90U	-	XC6223G351PR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90V	-	XC6223G361PR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
90X	-	XC6223G371PR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90Y	-	XC6223G381PR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
90Z	-	XC6223G391PR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
910	-	XC6223G401PR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
922	-	XC6223G12BPR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
923	-	XC6223G13BPR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
924	-	XC6223G14BPR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
925	-	XC6223G15BPR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
926	-	XC6223G16BPR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
927	-	XC6223G17BPR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
928	-	XC6223G18BPR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
929	-	XC6223G19BPR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92A	-	XC6223G20BPR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92B	-	XC6223G21BPR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92C	-	XC6223G22BPR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92D	-	XC6223G23BPR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92E	-	XC6223G24BPR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92F	-	XC6223G25BPR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92H	-	XC6223G26BPR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92K	-	XC6223G27BPR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92L	-	XC6223G28BPR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92M	-	XC6223G29BPR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92N	-	XC6223G30BPR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92P	-	XC6223G31BPR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92R	-	XC6223G32BPR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92S	-	XC6223G33BPR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92T	-	XC6223G34BPR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92U	-	XC6223G35BPR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92V	-	XC6223G36BPR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92X	-	XC6223G37BPR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92Y	-	XC6223G38BPR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
92Z	-	XC6223G39BPR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
932	-	XC6223H121PR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
933	-	XC6223H131PR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
934	-	XC6223H141PR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
935	-	XC6223H151PR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
936	-	XC6223H161PR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
937	-	XC6223H171PR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
938	-	XC6223H181PR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
939	-	XC6223H191PR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93A	-	XC6223H201PR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93B	-	XC6223H211PR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93C	-	XC6223H221PR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93D	-	XC6223H231PR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93E	-	XC6223H241PR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93F	-	XC6223H251PR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93H	-	XC6223H261PR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93K	-	XC6223H271PR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93L	-	XC6223H281PR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93M	-	XC6223H291PR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93N	-	XC6223H301PR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93P	-	XC6223H311PR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93R	-	XC6223H321PR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93S	-	XC6223H331PR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93T	-	XC6223H341PR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93U	-	XC6223H351PR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93V	-	XC6223H361PR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93X	-	XC6223H371PR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93Y	-	XC6223H381PR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
93Z	-	XC6223H391PR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
940	-	XC6223H401PR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
952	-	XC6223H12BPR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
953	-	XC6223H13BPR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
954	-	XC6223H14BPR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
955	-	XC6223H15BPR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
956	-	XC6223H16BPR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
957	-	XC6223H17BPR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
958	-	XC6223H18BPR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
959	-	XC6223H19BPR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95A	-	XC6223H20BPR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
95B	-	XC6223H21BPR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95C	-	XC6223H22BPR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95D	-	XC6223H23BPR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95E	-	XC6223H24BPR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95F	-	XC6223H25BPR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95H	-	XC6223H26BPR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95K	-	XC6223H27BPR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95L	-	XC6223H28BPR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95M	-	XC6223H29BPR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95N	-	XC6223H30BPR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95P	-	XC6223H31BPR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95R	-	XC6223H32BPR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95S	-	XC6223H33BPR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95T	-	XC6223H34BPR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95U	-	XC6223H35BPR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95V	-	XC6223H36BPR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95X	-	XC6223H37BPR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95Y	-	XC6223H38BPR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
95Z	-	XC6223H39BPR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL, PDR, ICP	SOT-89-5	32um	VR4	6n	Tor
9A0	-	XC6209A312PR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A0	-	XC6601A071PR	LVR-IC	0.7V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9A0	kc	XC6209E312PR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A1	-	XC6209A322PR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A1	-	XC6601A07BPR	LVR-IC	0.75V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9A1	kc	XC6209E322PR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A2	-	XC6209A332PR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A2	-	XC6601A081PR	LVR-IC	0.8V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9A2	kc	XC6209E332PR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A3	-	XC6209A342PR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A3	-	XC6601A08BPR	LVR-IC	0.85V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9A3	kc	XC6209E342PR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A4	-	XC6209A352PR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A4	-	XC6601A091PR	LVR-IC	0.9V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9A4	kc	XC6209E352PR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A5	-	XC6209A362PR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A5	-	XC6601A09BPR	LVR-IC	0.95V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9A5	kc	XC6209E362PR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A6	-	XC6209A372PR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A6	-	XC6601A101PR	LVR-IC	1.0V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9A6	kc	XC6209E372PR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A7	-	XC6209A382PR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A7	-	XC6601A10BPR	LVR-IC	1.05V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9A7	kc	XC6209E382PR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A8	-	XC6209A392PR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A8	-	XC6601A111PR	LVR-IC	1.1V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9A8	kc	XC6209E392PR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A9	-	XC6209A402PR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9A9	-	XC6601A11BPR	LVR-IC	1.15V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9A9	kc	XC6209E402PR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AA	-	XC6209A412PR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AA	-	XC6601A121PR	LVR-IC	1.2V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9AA	kc	XC6209E412PR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AB	-	XC6209A422PR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AB	-	XC6601A12BPR	LVR-IC	1.25V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9AB	kc	XC6209E422PR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AC	-	XC6209A432PR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AC	-	XC6601A131PR	LVR-IC	1.3V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9AC	kc	XC6209E432PR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AD	-	XC6209A442PR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AD	-	XC6601A13BPR	LVR-IC	1.35V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9AD	kc	XC6209E442PR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AE	-	XC6209A452PR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AE	-	XC6601A141PR	LVR-IC	1.4V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9AE	kc	XC6209E452PR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AF	-	XC6209A462PR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AF	-	XC6601A14BPR	LVR-IC	1.45V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9AF	kc	XC6209E462PR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AH	-	XC6209A472PR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AH	-	XC6601A151PR	LVR-IC	1.5V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9AH	kc	XC6209E472PR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9AK	-	XC6209A482PR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AK	-	XC6601A15BPR	LVR-IC	1.55V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9AK	kc	XC6209E482PR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AL	-	XC6209A492PR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AL	-	XC6601A161PR	LVR-IC	1.6V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9AL	kc	XC6209E492PR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AM	-	XC6209A502PR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AM	-	XC6601A16BPR	LVR-IC	1.65V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9AM	kc	XC6209E502PR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AN	-	XC6209A512PR	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AN	-	XC6601A171PR	LVR-IC	1.7V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9AN	kc	XC6209E512PR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AP	-	XC6209A522PR	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AP	-	XC6601A17BPR	LVR-IC	1.75V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9AP	kc	XC6209E522PR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AR	-	XC6209A532PR	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AR	-	XC6601A181PR	LVR-IC	1.8V±20mV, 400mA, +CE, PDR, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9AR	kc	XC6209E532PR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AS	-	XC6209A542PR	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AS	kc	XC6209E542PR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AT	-	XC6209A552PR	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AT	kc	XC6209E552PR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AU	-	XC6209A562PR	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AU	kc	XC6209E562PR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AV	-	XC6209A572PR	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AV	kc	XC6209E572PR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AX	-	XC6209A582PR	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AX	kc	XC6209E582PR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AY	-	XC6209A592PR	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AY	kc	XC6209E592PR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AZ	-	XC6209A602PR	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9AZ	kc	XC6209E602PR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9B0	-	XC6209B312PR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B0	-	XC6601B071PR	LVR-IC	0.7V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9B0	kc	XC6209F312PR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B1	-	XC6209B322PR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B1	-	XC6601B07BPR	LVR-IC	0.75V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9B1	kc	XC6209F322PR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B2	-	XC6209B332PR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B2	-	XC6601B081PR	LVR-IC	0.8V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9B2	kc	XC6209F332PR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B3	-	XC6209B342PR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B3	-	XC6601B08BPR	LVR-IC	0.85V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9B3	kc	XC6209F342PR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B4	-	XC6209B352PR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B4	-	XC6601B091PR	LVR-IC	0.9V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9B4	kc	XC6209F352PR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B5	-	XC6209B362PR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B5	-	XC6601B09BPR	LVR-IC	0.95V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9B5	kc	XC6209F362PR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B6	-	XC6209B372PR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B6	-	XC6601B101PR	LVR-IC	1.0V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9B6	kc	XC6209F372PR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B7	-	XC6209B382PR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B7	-	XC6601B10BPR	LVR-IC	1.05V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9B7	kc	XC6209F382PR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B8	-	XC6209B392PR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B8	-	XC6601B111PR	LVR-IC	1.1V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9B8	kc	XC6209F392PR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B9	-	XC6209B402PR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9B9	-	XC6601B11BPR	LVR-IC	1.15V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9B9	kc	XC6209F402PR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BA	-	XC6209B412PR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BA	-	XC6601B121PR	LVR-IC	1.2V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9BA	kc	XC6209F412PR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BB	-	XC6209B422PR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BB	-	XC6601B12BPR	LVR-IC	1.25V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9BB	kc	XC6209F422PR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BC	-	XC6209B432PR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BC	-	XC6601B131PR	LVR-IC	1.3V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9BC	kc	XC6209F432PR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BD	-	XC6209B442PR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BD	-	XC6601B13BPR	LVR-IC	1.35V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9BD	kc	XC6209F442PR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BE	-	XC6209B452PR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BE	-	XC6601B141PR	LVR-IC	1.4V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9BE	kc	XC6209F452PR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BF	-	XC6209B462PR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BF	-	XC6601B14BPR	LVR-IC	1.45V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9BF	kc	XC6209F462PR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BH	-	XC6209B472PR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BH	-	XC6601B151PR	LVR-IC	1.5V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9BH	kc	XC6209F472PR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BK	-	XC6209B482PR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BK	-	XC6601B15BPR	LVR-IC	1.55V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9BK	kc	XC6209F482PR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BL	-	XC6209B492PR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BL	-	XC6601B161PR	LVR-IC	1.6V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9BL	kc	XC6209F492PR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BM	-	XC6209B502PR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BM	-	XC6601B16BPR	LVR-IC	1.65V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9BM	kc	XC6209F502PR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BN	-	XC6209B512PR	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BN	-	XC6601B171PR	LVR-IC	1.7V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9BN	kc	XC6209F512PR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BP	-	XC6209B522PR	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BP	-	XC6601B17BPR	LVR-IC	1.75V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9BP	kc	XC6209F522PR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BR	-	XC6209B532PR	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BR	-	XC6601B181PR	LVR-IC	1.8V±20mV, 400mA, +CE, UVLO	SOT-89-5	32gk	VR11	6n	Tor
9BR	kc	XC6209F532PR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BS	-	XC6209B542PR	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BS	kc	XC6209F542PR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BT	-	XC6209B552PR	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BT	kc	XC6209F552PR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BU	-	XC6209B562PR	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BU	kc	XC6209F562PR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BV	-	XC6209B572PR	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BV	kc	XC6209F572PR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BX	-	XC6209B582PR	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BX	kc	XC6209F582PR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BY	-	XC6209B592PR	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BY	kc	XC6209F592PR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BZ	-	XC6209B602PR	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9BZ	kc	XC6209F602PR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9C0	-	XC6209C312PR	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C0	kc	XC6209G312PR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C1	-	XC6209C322PR	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C1	kc	XC6209G322PR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C2	-	XC6209C332PR	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C2	-	XC6223A121PR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9C2	kc	XC6209G332PR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C3	-	XC6209C342PR	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C3	-	XC6223A131PR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9C3	kc	XC6209G342PR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C4	-	XC6209C352PR	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C4	-	XC6223A141PR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9C4	kc	XC6209G352PR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C5	-	XC6209C362PR	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C5	-	XC6223A151PR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9C5	kc	XC6209G362PR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C6	-	XC6209C372PR	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C6	-	XC6223A161PR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9C6	kc	XC6209G372PR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C7	-	XC6209C382PR	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C7	-	XC6223A171PR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9C7	kc	XC6209G382PR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C8	-	XC6209C392PR	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C8	-	XC6223A181PR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9C8	kc	XC6209G392PR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9C9	-	XC6209C402PR	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9C9	-	XC6223A191PR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9C9	kc	XC6209G402PR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CA	-	XC6209C412PR	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CA	-	XC6223A201PR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CA	kc	XC6209G412PR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CB	-	XC6209C422PR	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CB	-	XC6223A211PR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CB	kc	XC6209G422PR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CC	-	XC6209C432PR	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CC	-	XC6223A221PR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CC	kc	XC6209G432PR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CD	-	XC6209C442PR	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CD	-	XC6223A231PR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CD	kc	XC6209G442PR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CE	-	XC6209C452PR	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CE	-	XC6223A241PR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CE	kc	XC6209G452PR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CF	-	XC6209C462PR	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CF	-	XC6223A251PR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CF	kc	XC6209G462PR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CH	-	XC6209C472PR	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CH	-	XC6223A261PR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CH	kc	XC6209G472PR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CK	-	XC6209C482PR	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CK	-	XC6223A271PR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CK	kc	XC6209G482PR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CL	-	XC6209C492PR	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CL	-	XC6223A281PR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CL	kc	XC6209G492PR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CM	-	XC6209C502PR	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CM	-	XC6223A291PR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CM	kc	XC6209G502PR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CN	-	XC6209C512PR	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CN	-	XC6223A301PR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CN	kc	XC6209G512PR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CP	-	XC6209C522PR	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CP	-	XC6223A311PR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CP	kc	XC6209G522PR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CR	-	XC6209C532PR	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CR	-	XC6223A321PR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CR	kc	XC6209G532PR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CS	-	XC6209C542PR	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CS	-	XC6223A331PR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CS	kc	XC6209G542PR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CT	-	XC6209C552PR	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CT	-	XC6223A341PR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CT	kc	XC6209G552PR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CU	-	XC6209C562PR	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CU	-	XC6223A351PR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CU	kc	XC6209G562PR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CV	-	XC6209C572PR	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CV	-	XC6223A361PR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CV	kc	XC6209G572PR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CX	-	XC6209C582PR	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CX	-	XC6223A371PR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CX	kc	XC6209G582PR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CY	-	XC6209C592PR	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CY	-	XC6223A381PR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CY	kc	XC6209G592PR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CZ	-	XC6209C602PR	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9CZ	-	XC6223A391PR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9CZ	kc	XC6209G602PR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9D0	-	XC6209D312PR	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D0	-	XC6223A401PR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9D0	kc	XC6209H312PR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D1	-	XC6209D322PR	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D1	kc	XC6209H322PR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D2	-	XC6209D332PR	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D2	kc	XC6209H332PR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9D3	-	XC6209D342PR	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D3	kc	XC6209H342PR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D4	-	XC6209D352PR	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D4	kc	XC6209H352PR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D5	-	XC6209D362PR	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D5	kc	XC6209H362PR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D6	-	XC6209D372PR	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D6	kc	XC6209H372PR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D7	-	XC6209D382PR	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D7	kc	XC6209H382PR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D8	-	XC6209D392PR	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D8	kc	XC6209H392PR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D9	-	XC6209D402PR	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9D9	kc	XC6209H402PR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DA	-	XC6209D412PR	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DA	kc	XC6209H412PR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DB	-	XC6209D422PR	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DB	kc	XC6209H422PR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DC	-	XC6209D432PR	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DC	kc	XC6209H432PR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DD	-	XC6209D442PR	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DD	kc	XC6209H442PR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DE	-	XC6209D452PR	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DE	kc	XC6209H452PR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DF	-	XC6209D462PR	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DF	kc	XC6209H462PR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DH	-	XC6209D472PR	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DH	kc	XC6209H472PR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DK	-	XC6209D482PR	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DK	kc	XC6209H482PR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DL	-	XC6209D492PR	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DL	kc	XC6209H492PR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DM	-	XC6209D502PR	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DM	kc	XC6209H502PR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DN	-	XC6209D512PR	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DN	kc	XC6209H512PR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DP	-	XC6209D522PR	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DP	kc	XC6209H522PR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DR	-	XC6209D532PR	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DR	kc	XC6209H532PR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DS	-	XC6209D542PR	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DS	kc	XC6209H542PR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DT	-	XC6209D552PR	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DT	kc	XC6209H552PR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DU	-	XC6209D562PR	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DU	kc	XC6209H562PR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DV	-	XC6209D572PR	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DV	kc	XC6209H572PR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DX	-	XC6209D582PR	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DX	kc	XC6209H582PR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DY	-	XC6209D592PR	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DY	kc	XC6209H592PR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DZ	-	XC6209D602PR	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9DZ	kc	XC6209H602PR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9E2	-	XC6223A12BPR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9E3	-	XC6223A13BPR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9E4	-	XC6223A14BPR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9E5	-	XC6223A15BPR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9E6	-	XC6223A16BPR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9E7	-	XC6223A17BPR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9E8	-	XC6209A09APR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9E8	-	XC6223A18BPR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9E8	kc	XC6209E09APR	LVR-IC	LDO, 0.95V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9E9	-	XC6209A10APR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9E9	-	XC6223A19BPR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9E9	kc	XC6209E10APR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EA	-	XC6209A11APR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EA	-	XC6223A20BPR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9EA	kc	XC6209E11APR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EB	-	XC6209A12APR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9EB	-	XC6223A21BPR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9EB	kc	XC6209E12APR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EC	-	XC6209A13APR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EC	-	XC6223A22BPR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9EC	kc	XC6209E13APR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9ED	-	XC6209A14APR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9ED	-	XC6223A23BPR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9ED	kc	XC6209E14APR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EE	-	XC6209A15APR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EE	-	XC6223A24BPR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9EE	kc	XC6209E15APR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EF	-	XC6209A16APR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EF	-	XC6223A25BPR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9EF	kc	XC6209E16APR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EH	-	XC6209A17APR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EH	-	XC6223A26BPR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9EH	kc	XC6209E17APR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EK	-	XC6209A18APR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EK	-	XC6223A27BPR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9EK	kc	XC6209E18APR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EL	-	XC6209A19APR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EL	-	XC6223A28BPR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9EL	kc	XC6209E19APR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EM	-	XC6209A20APR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EM	-	XC6223A29BPR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9EM	kc	XC6209E20APR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EN	-	XC6209A21APR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EN	-	XC6223A30BPR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9EN	kc	XC6209E21APR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EP	-	XC6209A22APR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EP	-	XC6223A31BPR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9EP	kc	XC6209E22APR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9ER	-	XC6209A23APR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9ER	-	XC6223A32BPR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9ER	kc	XC6209E23APR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9ES	-	XC6209A24APR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9ES	-	XC6223A33BPR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9ES	kc	XC6209E24APR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9ET	-	XC6209A25APR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9ET	-	XC6223A34BPR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9ET	kc	XC6209E25APR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EU	-	XC6209A26APR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EU	-	XC6223A35BPR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9EU	kc	XC6209E26APR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EV	-	XC6209A27APR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EV	-	XC6223A36BPR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9EV	kc	XC6209E27APR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EX	-	XC6209A28APR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EX	-	XC6223A37BPR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9EX	kc	XC6209E28APR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EY	-	XC6209A29APR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EY	-	XC6223A38BPR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9EY	kc	XC6209E29APR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EZ	-	XC6209A30APR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9EZ	-	XC6223A39BPR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Tor
9EZ	kc	XC6209E30APR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9F2	-	XC6223B121PR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9F3	-	XC6223B131PR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9F4	-	XC6223B141PR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9F5	-	XC6223B151PR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9F6	-	XC6223B161PR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9F7	-	XC6223B171PR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9F8	-	XC6209B09APR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9F8	-	XC6223B181PR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9F8	kc	XC6209F09APR	LVR-IC	LDO, 0.95V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9F9	-	XC6209B10APR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9F9	-	XC6223B191PR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9F9	kc	XC6209F10APR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FA	-	XC6209B11APR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FA	-	XC6223B201PR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9FA	kc	XC6209F11APR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FB	-	XC6209B12APR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FB	-	XC6223B211PR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FB	kc	XC6209F12APR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FC	-	XC6209B13APR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FC	-	XC6223B221PR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FC	kc	XC6209F13APR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FD	-	XC6209B14APR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FD	-	XC6223B231PR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FD	kc	XC6209F14APR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FE	-	XC6209B15APR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FE	-	XC6223B241PR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FE	kc	XC6209F15APR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FF	-	XC6209B16APR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FF	-	XC6223B251PR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FF	kc	XC6209F16APR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FH	-	XC6209B17APR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FH	-	XC6223B261PR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FH	kc	XC6209F17APR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FK	-	XC6209B18APR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FK	-	XC6223B271PR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FK	kc	XC6209F18APR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FL	-	XC6209B19APR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FL	-	XC6223B281PR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FL	kc	XC6209F19APR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FM	-	XC6209B20APR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FM	-	XC6223B291PR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FM	kc	XC6209F20APR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FN	-	XC6209B21APR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FN	-	XC6223B301PR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FN	kc	XC6209F21APR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FP	-	XC6209B22APR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FP	-	XC6223B311PR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FP	kc	XC6209F22APR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FR	-	XC6209B23APR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FR	-	XC6223B321PR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FR	kc	XC6209F23APR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FS	-	XC6209B24APR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FS	-	XC6223B331PR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FS	kc	XC6209F24APR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FT	-	XC6209B25APR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FT	-	XC6223B341PR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FT	kc	XC6209F25APR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FU	-	XC6209B26APR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FU	-	XC6223B351PR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FU	kc	XC6209F26APR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FV	-	XC6209B27APR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FV	-	XC6223B361PR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FV	kc	XC6209F27APR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FX	-	XC6209B28APR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FX	-	XC6223B371PR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FX	kc	XC6209F28APR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FY	-	XC6209B29APR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FY	-	XC6223B381PR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FY	kc	XC6209F29APR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FZ	-	XC6209B30APR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9FZ	-	XC6223B391PR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9FZ	kc	XC6209F30APR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9H0	-	XC6223B401PR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9H8	-	XC6209C09APR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9H8	kc	XC6209G09APR	LVR-IC	LDO, 0.95V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9H9	-	XC6209C10APR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9H9	kc	XC6209G10APR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HA	-	XC6209C11APR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HA	kc	XC6209G11APR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HB	-	XC6209C12APR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HB	kc	XC6209G12APR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HC	-	XC6209C13APR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HC	kc	XC6209G13APR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HD	-	XC6209C14APR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9HD	kc	XC6209G14APR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HE	-	XC6209C15APR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HE	kc	XC6209G15APR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HF	-	XC6209C16APR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HF	kc	XC6209G16APR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HH	-	XC6209C17APR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HH	kc	XC6209G17APR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HK	-	XC6209C18APR	LVR-IC	LDO, 1.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HK	kc	XC6209G18APR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HL	-	XC6209C19APR	LVR-IC	LDO, 1.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HL	kc	XC6209G19APR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HM	-	XC6209C20APR	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HM	kc	XC6209G20APR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HN	-	XC6209C21APR	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HN	kc	XC6209G21APR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HP	-	XC6209C22APR	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HP	kc	XC6209G22APR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HR	-	XC6209C23APR	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HR	kc	XC6209G23APR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HS	-	XC6209C24APR	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HS	kc	XC6209G24APR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HT	-	XC6209C25APR	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HT	kc	XC6209G25APR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HU	-	XC6209C26APR	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HU	kc	XC6209G26APR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HV	-	XC6209C27APR	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HV	kc	XC6209G27APR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HX	-	XC6209C28APR	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HX	kc	XC6209G28APR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HY	-	XC6209C29APR	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HY	kc	XC6209G29APR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HZ	-	XC6209C30APR	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9HZ	kc	XC6209G30APR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9K2	-	XC6223B12BPR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9K3	-	XC6223B13BPR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9K4	-	XC6223B14BPR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9K5	-	XC6223B15BPR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9K6	-	XC6223B16BPR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9K7	-	XC6223B17BPR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9K8	-	XC6209D09APR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9K8	-	XC6223B18BPR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9K8	kc	XC6209H09APR	LVR-IC	LDO, 0.95V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9K9	-	XC6209D10APR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9K9	-	XC6223B19BPR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9K9	kc	XC6209H10APR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KA	-	XC6209D11APR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KA	-	XC6223B20BPR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KA	kc	XC6209H11APR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KB	-	XC6209D12APR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KB	-	XC6223B21BPR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KB	kc	XC6209H12APR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KC	-	XC6209D13APR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KC	-	XC6223B22BPR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KC	kc	XC6209H13APR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KD	-	XC6209D14APR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KD	-	XC6223B23BPR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KD	kc	XC6209H14APR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KE	-	XC6209D15APR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KE	-	XC6223B24BPR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KE	kc	XC6209H15APR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KF	-	XC6209D16APR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KF	-	XC6223B25BPR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KF	kc	XC6209H16APR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KH	-	XC6209D17APR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KH	-	XC6223B26BPR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KH	kc	XC6209H17APR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KK	-	XC6209D18APR	LVR-IC	LDO, 1.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KK	-	XC6223B27BPR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KK	kc	XC6209H18APR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KL	-	XC6209D19APR	LVR-IC	LDO, 1.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9KL	-	XC6223B28BPR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KL	kc	XC6209H19APR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KM	-	XC6209D20APR	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KM	-	XC6223B29BPR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KM	kc	XC6209H20APR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KN	-	XC6209D21APR	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KN	-	XC6223B30BPR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KN	kc	XC6209H21APR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KP	-	XC6209D22APR	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KP	-	XC6223B31BPR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KP	kc	XC6209H22APR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KR	-	XC6209D23APR	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KR	-	XC6223B32BPR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KR	kc	XC6209H23APR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KS	-	XC6209D24APR	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KS	-	XC6223B33BPR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KS	kc	XC6209H24APR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KT	-	XC6209D25APR	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KT	-	XC6223B34BPR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KT	kc	XC6209H25APR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KU	-	XC6209D26APR	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KU	-	XC6223B35BPR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KU	kc	XC6209H26APR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KV	-	XC6209D27APR	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KV	-	XC6223B36BPR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KV	kc	XC6209H27APR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KX	-	XC6209D28APR	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KX	-	XC6223B37BPR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KX	kc	XC6209H28APR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KY	-	XC6209D29APR	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KY	-	XC6223B38BPR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KY	kc	XC6209H29APR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KZ	-	XC6209D30APR	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9KZ	-	XC6223B39BPR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL	SOT-89-5	32um	VR4	6n	Tor
9KZ	kc	XC6209H30APR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9L0	-	XC6209A31APR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L0	kc	XC6209E31APR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L1	-	XC6209A32APR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L1	kc	XC6209E32APR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L2	-	XC6209A33APR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L2	-	XC6223C121PR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9L2	kc	XC6209E33APR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L3	-	XC6209A34APR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L3	-	XC6223C131PR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9L3	kc	XC6209E34APR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L4	-	XC6209A35APR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L4	-	XC6223C141PR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9L4	kc	XC6209E35APR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L5	-	XC6209A36APR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L5	-	XC6223C151PR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9L5	kc	XC6209E36APR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L6	-	XC6209A37APR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L6	-	XC6223C161PR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9L6	kc	XC6209E37APR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L7	-	XC6209A38APR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L7	-	XC6223C171PR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9L7	kc	XC6209E38APR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L8	-	XC6209A39APR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L8	-	XC6223C181PR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9L8	kc	XC6209E39APR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L9	-	XC6209A40APR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9L9	-	XC6223C191PR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9L9	kc	XC6209E40APR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LA	-	XC6209A41APR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LA	-	XC6223C201PR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LA	kc	XC6209E41APR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LB	-	XC6209A42APR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LB	-	XC6223C211PR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LB	kc	XC6209E42APR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LC	-	XC6209A43APR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9LC	-	XC6223C221PR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LC	kc	XC6209E43APR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LD	-	XC6209A44APR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LD	-	XC6223C231PR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LD	kc	XC6209E44APR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LE	-	XC6209A45APR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LE	-	XC6223C241PR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LE	kc	XC6209E45APR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LF	-	XC6209A46APR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LF	-	XC6223C251PR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LF	kc	XC6209E46APR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LH	-	XC6209A47APR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LH	-	XC6223C261PR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LH	kc	XC6209E47APR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LK	-	XC6209A48APR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LK	-	XC6223C271PR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LK	kc	XC6209E48APR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LL	-	XC6209A49APR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LL	-	XC6223C281PR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LL	kc	XC6209E49APR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LM	-	XC6209A50APR	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LM	-	XC6223C291PR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LM	kc	XC6209E50APR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LN	-	XC6209A51APR	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LN	-	XC6223C301PR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LN	kc	XC6209E51APR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LP	-	XC6209A52APR	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LP	-	XC6223C311PR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LP	kc	XC6209E52APR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LR	-	XC6209A53APR	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LR	-	XC6223C321PR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LR	kc	XC6209E53APR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LS	-	XC6209A54APR	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LS	-	XC6223C331PR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LS	kc	XC6209E54APR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LT	-	XC6209A55APR	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LT	-	XC6223C341PR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LT	kc	XC6209E55APR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LU	-	XC6209A56APR	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LU	-	XC6223C351PR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LU	kc	XC6209E56APR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LV	-	XC6209A57APR	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LV	-	XC6223C361PR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LV	kc	XC6209E57APR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LX	-	XC6209A58APR	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LX	-	XC6223C371PR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LX	kc	XC6209E58APR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LY	-	XC6209A59APR	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LY	-	XC6223C381PR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9LY	kc	XC6209E59APR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9LZ	-	XC6223C391PR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9M0	-	XC6209B31APR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M0	-	XC6223C401PR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9M0	kc	XC6209F31APR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M1	-	XC6209B32APR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M1	kc	XC6209F32APR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M2	-	XC6209B33APR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M2	kc	XC6209F33APR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M3	-	XC6209B34APR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M3	kc	XC6209F34APR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M4	-	XC6209B35APR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M4	kc	XC6209F35APR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M5	-	XC6209B36APR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M5	kc	XC6209F36APR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M6	-	XC6209B37APR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M6	kc	XC6209F37APR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M7	-	XC6209B38APR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M7	kc	XC6209F38APR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M8	-	XC6209B39APR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M8	kc	XC6209F39APR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9M9	-	XC6209B40APR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9M9	kc	XC6209F40APR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MA	-	XC6209B41APR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MA	kc	XC6209F41APR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MB	-	XC6209B42APR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MB	kc	XC6209F42APR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MC	-	XC6209B43APR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MC	kc	XC6209F43APR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MD	-	XC6209B44APR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MD	kc	XC6209F44APR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9ME	-	XC6209B45APR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9ME	kc	XC6209F45APR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MF	-	XC6209B46APR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MF	kc	XC6209F46APR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MH	-	XC6209B47APR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MH	kc	XC6209F47APR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MK	-	XC6209B48APR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MK	kc	XC6209F48APR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9ML	-	XC6209B49APR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9ML	kc	XC6209F49APR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MM	-	XC6209B50APR	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MM	kc	XC6209F50APR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MN	-	XC6209B51APR	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MN	kc	XC6209F51APR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MP	-	XC6209B52APR	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MP	kc	XC6209F52APR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MR	-	XC6209B53APR	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MR	kc	XC6209F53APR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MS	-	XC6209B54APR	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MS	kc	XC6209F54APR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MT	-	XC6209B55APR	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MT	kc	XC6209F55APR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MU	-	XC6209B56APR	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MU	kc	XC6209F56APR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MV	-	XC6209B57APR	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MV	kc	XC6209F57APR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MX	-	XC6209B58APR	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MX	kc	XC6209F58APR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MY	-	XC6209B59APR	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9MY	kc	XC6209F59APR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9N0	-	XC6209C31APR	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N0	kc	XC6209G31APR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N1	-	XC6209C32APR	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N1	kc	XC6209G32APR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N2	-	XC6209C33APR	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N2	-	XC6223C12BPR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9N2	kc	XC6209G33APR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N3	-	XC6209C34APR	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N3	-	XC6223C13BPR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9N3	kc	XC6209G34APR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N4	-	XC6209C35APR	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N4	-	XC6223C14BPR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9N4	kc	XC6209G35APR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N5	-	XC6209C36APR	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N5	-	XC6223C15BPR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9N5	kc	XC6209G36APR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N6	-	XC6209C37APR	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N6	-	XC6223C16BPR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9N6	kc	XC6209G37APR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N7	-	XC6209C38APR	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N7	-	XC6223C17BPR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9N7	kc	XC6209G38APR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N8	-	XC6209C39APR	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N8	-	XC6223C18BPR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9N8	kc	XC6209G39APR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N9	-	XC6209C40APR	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9N9	-	XC6223C19BPR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9N9	kc	XC6209G40APR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NA	-	XC6209C41APR	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NA	-	XC6223C20BPR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9NA	kc	XC6209G41APR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NB	-	XC6209C42APR	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NB	-	XC6223C21BPR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NB	kc	XC6209G42APR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NC	-	XC6209C43APR	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NC	-	XC6223C22BPR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NC	kc	XC6209G43APR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9ND	-	XC6209C44APR	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9ND	-	XC6223C23BPR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9ND	kc	XC6209G44APR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NE	-	XC6209C45APR	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NE	-	XC6223C24BPR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NE	kc	XC6209G45APR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NF	-	XC6209C46APR	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NF	-	XC6223C25BPR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NF	kc	XC6209G46APR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NH	-	XC6209C47APR	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NH	-	XC6223C26BPR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NH	kc	XC6209G47APR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NK	-	XC6209C48APR	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NK	-	XC6223C27BPR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NK	kc	XC6209G48APR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NL	-	XC6209C49APR	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NL	-	XC6223C28BPR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NL	kc	XC6209G49APR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NM	-	XC6209C50APR	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NM	-	XC6223C29BPR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NM	kc	XC6209G50APR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NN	-	XC6209C51APR	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NN	-	XC6223C30BPR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NN	kc	XC6209G51APR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NP	-	XC6209C52APR	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NP	-	XC6223C31BPR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NP	kc	XC6209G52APR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NR	-	XC6209C53APR	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NR	-	XC6223C32BPR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NR	kc	XC6209G53APR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NS	-	XC6209C54APR	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NS	-	XC6223C33BPR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NS	kc	XC6209G54APR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NT	-	XC6209C55APR	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NT	-	XC6223C34BPR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NT	kc	XC6209G55APR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NU	-	XC6209C56APR	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NU	-	XC6223C35BPR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NU	kc	XC6209G56APR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NV	-	XC6209C57APR	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NV	-	XC6223C36BPR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NV	kc	XC6209G57APR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NX	-	XC6209C58APR	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NX	-	XC6223C37BPR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NX	kc	XC6209G58APR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NY	-	XC6209C59APR	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NY	-	XC6223C38BPR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9NY	kc	XC6209G59APR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9NZ	-	XC6223C39BPR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6n	Tor
9P0	-	XC6209D31APR	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P0	kc	XC6209H31APR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P1	-	XC6209D32APR	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P1	kc	XC6209H32APR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P2	-	XC6209D33APR	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P2	-	XC6223D121PR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9P2	kc	XC6209H33APR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P3	-	XC6209D34APR	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P3	-	XC6223D131PR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9P3	kc	XC6209H34APR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P4	-	XC6209D35APR	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P4	-	XC6223D141PR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9P4	kc	XC6209H35APR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P5	-	XC6209D36APR	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9P5	-	XC6223D151PR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9P5	kc	XC6209H36APR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P6	-	XC6209D37APR	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P6	-	XC6223D161PR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9P6	kc	XC6209H37APR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P7	-	XC6209D38APR	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P7	-	XC6223D171PR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9P7	kc	XC6209H38APR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P8	-	XC6209D39APR	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P8	-	XC6223D181PR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9P8	kc	XC6209H39APR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P9	-	XC6209D40APR	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9P9	-	XC6223D191PR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9P9	kc	XC6209H40APR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PA	-	XC6209D41APR	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PA	-	XC6223D201PR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PA	kc	XC6209H41APR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PB	-	XC6209D42APR	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PB	-	XC6223D211PR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PB	kc	XC6209H42APR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PC	-	XC6209D43APR	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PC	-	XC6223D221PR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PC	kc	XC6209H43APR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PD	-	XC6209D44APR	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PD	-	XC6223D231PR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PD	kc	XC6209H44APR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PE	-	XC6209D45APR	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PE	-	XC6223D241PR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PE	kc	XC6209H45APR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PF	-	XC6209D46APR	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PF	-	XC6223D251PR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PF	kc	XC6209H46APR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PH	-	XC6209D47APR	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PH	-	XC6223D261PR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PH	kc	XC6209H47APR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PK	-	XC6209D48APR	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PK	-	XC6223D271PR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PK	kc	XC6209H48APR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PL	-	XC6209D49APR	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PL	-	XC6223D281PR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PL	kc	XC6209H49APR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PM	-	XC6209D50APR	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PM	-	XC6223D291PR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PM	kc	XC6209H50APR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PN	-	XC6209D51APR	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PN	-	XC6223D301PR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PN	kc	XC6209H51APR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PP	-	XC6209D52APR	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PP	-	XC6223D311PR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PP	kc	XC6209H52APR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PR	-	XC6209D53APR	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PR	-	XC6223D321PR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PR	kc	XC6209H53APR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PS	-	XC6209D54APR	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PS	-	XC6223D331PR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PS	kc	XC6209H54APR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PT	-	XC6209D55APR	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PT	-	XC6223D341PR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PT	kc	XC6209H55APR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PU	-	XC6209D56APR	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PU	-	XC6223D351PR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PU	kc	XC6209H56APR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PV	-	XC6209D57APR	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PV	-	XC6223D361PR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PV	kc	XC6209H57APR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PX	-	XC6209D58APR	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PX	-	XC6223D371PR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9PX	kc	XC6209H58APR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PY	-	XC6209D59APR	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PY	-	XC6223D381PR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9PY	kc	XC6209H59APR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9PZ	-	XC6223D391PR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9R0	-	XC6223D401PR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9S2	-	XC6223D12BPR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9S3	-	XC6223D13BPR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9S4	-	XC6223D14BPR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9S5	-	XC6223D15BPR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9S6	-	XC6223D16BPR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9S7	-	XC6223D17BPR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9S8	-	XC6223D18BPR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9S9	-	XC6223D19BPR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SA	-	XC6223D20BPR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SB	-	XC6223D21BPR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SC	-	XC6223D22BPR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SD	-	XC6223D23BPR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SE	-	XC6223D24BPR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SF	-	XC6223D25BPR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SH	-	XC6223D26BPR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SK	-	XC6223D27BPR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SL	-	XC6223D28BPR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SM	-	XC6223D29BPR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SN	-	XC6223D30BPR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SP	-	XC6223D31BPR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SR	-	XC6223D32BPR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SS	-	XC6223D33BPR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9ST	-	XC6223D34BPR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SU	-	XC6223D35BPR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SV	-	XC6223D36BPR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SX	-	XC6223D37BPR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SY	-	XC6223D38BPR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9SZ	-	XC6223D39BPR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32um	VR4	6n	Tor
9T2	-	XC6223E121PR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9T3	-	XC6223E131PR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9T4	-	XC6223E141PR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9T5	-	XC6223E151PR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9T6	-	XC6223E161PR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9T7	-	XC6223E171PR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9T8	-	XC6223E181PR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9T9	-	XC6223E191PR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TA	-	XC6223E201PR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TB	-	XC6223E211PR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TC	-	XC6223E221PR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TD	-	XC6223E231PR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TE	-	XC6223E241PR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TF	-	XC6223E251PR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TH	-	XC6223E261PR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TK	-	XC6223E271PR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TL	-	XC6223E281PR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TM	-	XC6223E291PR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TN	-	XC6223E301PR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TP	-	XC6223E311PR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TR	-	XC6223E321PR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TS	-	XC6223E331PR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TT	-	XC6223E341PR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TU	-	XC6223E351PR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TV	-	XC6223E361PR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TX	-	XC6223E371PR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TY	-	XC6223E381PR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9TZ	-	XC6223E391PR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9U0	-	XC6223E401PR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9V2	-	XC6223E12BPR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9V3	-	XC6223E13BPR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9V4	-	XC6223E14BPR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9V5	-	XC6223E15BPR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9V6	-	XC6223E16BPR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9V7	-	XC6223E17BPR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9V8	-	XC6209A092PR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9V8	-	XC6223E18BPR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9V8	kc	XC6209E092PR	LVR-IC	LDO, 0.9V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9V9	-	XC6209A102PR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9V9	-	XC6223E19BPR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9V9	kc	XC6209E102PR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VA	-	XC6209A112PR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VA	-	XC6223E20BPR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VA	kc	XC6209E112PR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VB	-	XC6209A122PR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VB	-	XC6223E21BPR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VB	kc	XC6209E122PR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VC	-	XC6209A132PR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VC	-	XC6223E22BPR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VC	kc	XC6209E132PR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VD	-	XC6209A142PR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VD	-	XC6223E23BPR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VD	kc	XC6209E142PR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VE	-	XC6209A152PR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VE	-	XC6223E24BPR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VE	kc	XC6209E152PR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VF	-	XC6209A162PR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VF	-	XC6223E25BPR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VF	kc	XC6209E162PR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VH	-	XC6209A172PR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VH	-	XC6223E26BPR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VH	kc	XC6209E172PR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VK	-	XC6209A182PR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VK	-	XC6223E27BPR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VK	kc	XC6209E182PR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VL	-	XC6209A192PR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VL	-	XC6223E28BPR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VL	kc	XC6209E192PR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VM	-	XC6209A202PR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VM	-	XC6223E29BPR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VM	kc	XC6209E202PR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VN	-	XC6209A212PR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VN	-	XC6223E30BPR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VN	kc	XC6209E212PR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VP	-	XC6209A222PR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VP	-	XC6223E31BPR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VP	kc	XC6209E222PR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VR	-	XC6209A232PR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VR	-	XC6223E32BPR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VR	kc	XC6209E232PR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VS	-	XC6209A242PR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VS	-	XC6223E33BPR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VS	kc	XC6209E242PR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VT	-	XC6209A252PR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VT	-	XC6223E34BPR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VT	kc	XC6209E252PR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VU	-	XC6209A262PR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VU	-	XC6223E35BPR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VU	kc	XC6209E262PR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VV	-	XC6209A272PR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VV	-	XC6223E36BPR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VV	kc	XC6209E272PR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VX	-	XC6209A282PR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VX	-	XC6223E37BPR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VX	kc	XC6209E282PR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VY	-	XC6209A292PR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VY	-	XC6223E38BPR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VY	kc	XC6209E292PR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VZ	-	XC6209A302PR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9VZ	-	XC6223E39BPR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, ICP	SOT-89-5	32um	VR4	6n	Tor
9VZ	kc	XC6209E302PR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
9X2	-	XC6223F121PR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9X3	-	XC6223F131PR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9X4	-	XC6223F141PR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9X5	-	XC6223F151PR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9X6	-	XC6223F161PR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9X7	-	XC6223F171PR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9X8	-	XC6209B092PR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9X8	-	XC6223F181PR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9X8	kc	XC6209F092PR	LVR-IC	LDO, 0.9V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9X9	-	XC6209B102PR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9X9	-	XC6223F191PR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9X9	kc	XC6209F102PR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XA	-	XC6209B112PR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XA	-	XC6223F201PR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XA	kc	XC6209F112PR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XB	-	XC6209B122PR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XB	-	XC6223F211PR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XB	kc	XC6209F122PR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XC	-	XC6209B132PR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XC	-	XC6223F221PR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XC	kc	XC6209F132PR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XD	-	XC6209B142PR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XD	-	XC6223F231PR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XD	kc	XC6209F142PR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XE	-	XC6209B152PR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XE	-	XC6223F241PR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XE	kc	XC6209F152PR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XF	-	XC6209B162PR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XF	-	XC6223F251PR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XF	kc	XC6209F162PR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XH	-	XC6209B172PR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XH	-	XC6223F261PR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XH	kc	XC6209F172PR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XK	-	XC6209B182PR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XK	-	XC6223F271PR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XK	kc	XC6209F182PR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XL	-	XC6209B192PR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XL	-	XC6223F281PR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XL	kc	XC6209F192PR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XM	-	XC6209B202PR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XM	-	XC6223F291PR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XM	kc	XC6209F202PR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XN	-	XC6209B212PR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XN	-	XC6223F301PR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XN	kc	XC6209F212PR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XP	-	XC6209B222PR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XP	-	XC6223F311PR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XP	kc	XC6209F222PR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XR	-	XC6209B232PR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XR	-	XC6223F321PR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XR	kc	XC6209F232PR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XS	-	XC6209B242PR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XS	-	XC6223F331PR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XS	kc	XC6209F242PR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XT	-	XC6209B252PR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XT	-	XC6223F341PR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XT	kc	XC6209F252PR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XU	-	XC6209B262PR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XU	-	XC6223F351PR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XU	kc	XC6209F262PR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XV	-	XC6209B272PR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XV	-	XC6223F361PR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XV	kc	XC6209F272PR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XX	-	XC6209B282PR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XX	-	XC6223F371PR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XX	kc	XC6209F282PR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XY	-	XC6209B292PR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XY	-	XC6223F381PR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XY	kc	XC6209F292PR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XZ	-	XC6209B302PR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9XZ	-	XC6223F391PR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9XZ	kc	XC6209F302PR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-89-5	32um	VR4	6h	Tor
9Y0	-	XC6223F401PR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9Y8	-	XC6209C092PR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9Y8	kc	XC6209G092PR	LVR-IC	LDO, 0.9V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9Y9	-	XC6209C102PR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9Y9	kc	XC6209G102PR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YA	-	XC6209C112PR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9YA	kc	XC6209G112PR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YB	-	XC6209C122PR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YB	kc	XC6209G122PR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YC	-	XC6209C132PR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YC	kc	XC6209G132PR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YD	-	XC6209C142PR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YD	kc	XC6209G142PR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YE	-	XC6209C152PR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YE	kc	XC6209G152PR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YF	-	XC6209C162PR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YF	kc	XC6209G162PR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YH	-	XC6209C172PR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YH	kc	XC6209G172PR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YK	-	XC6209C182PR	LVR-IC	LDO, 1.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YK	kc	XC6209G182PR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YL	-	XC6209C192PR	LVR-IC	LDO, 1.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YL	kc	XC6209G192PR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YM	-	XC6209C202PR	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YM	kc	XC6209G202PR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YN	-	XC6209C212PR	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YN	kc	XC6209G212PR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YP	-	XC6209C222PR	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YP	kc	XC6209G222PR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YR	-	XC6209C232PR	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YR	kc	XC6209G232PR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YS	-	XC6209C242PR	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YS	kc	XC6209G242PR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YT	-	XC6209C252PR	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YT	kc	XC6209G252PR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YU	-	XC6209C262PR	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YU	kc	XC6209G262PR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YV	-	XC6209C272PR	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YV	kc	XC6209G272PR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YX	-	XC6209C282PR	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YX	kc	XC6209G282PR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YY	-	XC6209C292PR	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YY	kc	XC6209G292PR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YZ	-	XC6209C302PR	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9YZ	kc	XC6209G302PR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
9Z2	-	XC6223F12BPR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9Z3	-	XC6223F13BPR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9Z4	-	XC6223F14BPR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9Z5	-	XC6223F15BPR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9Z6	-	XC6223F16BPR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9Z7	-	XC6223F17BPR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9Z8	-	XC6209D092PR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9Z8	-	XC6223F18BPR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9Z8	kc	XC6209H092PR	LVR-IC	LDO, 0.9V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9Z9	-	XC6209D102PR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9Z9	-	XC6223F19BPR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9Z9	kc	XC6209H102PR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZA	-	XC6209D112PR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZA	-	XC6223F20BPR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZA	kc	XC6209H112PR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZB	-	XC6209D122PR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZB	-	XC6223F21BPR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZB	kc	XC6209H122PR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZC	-	XC6209D132PR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZC	-	XC6223F22BPR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZC	kc	XC6209H132PR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZD	-	XC6209D142PR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZD	-	XC6223F23BPR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZD	kc	XC6209H142PR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZE	-	XC6209D152PR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZE	-	XC6223F24BPR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZE	kc	XC6209H152PR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZF	-	XC6209D162PR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZF	-	XC6223F25BPR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZF	kc	XC6209H162PR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZH	-	XC6209D172PR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9ZH	-	XC6223F26BPR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZH	kc	XC6209H172PR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZK	-	XC6209D182PR	LVR-IC	LDO, 1.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZK	-	XC6223F27BPR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZK	kc	XC6209H182PR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZL	-	XC6209D192PR	LVR-IC	LDO, 1.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZL	-	XC6223F28BPR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZL	kc	XC6209H192PR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZM	-	XC6209D202PR	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZM	-	XC6223F29BPR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZM	kc	XC6209H202PR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZN	-	XC6209D212PR	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZN	-	XC6223F30BPR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZN	kc	XC6209H212PR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZP	-	XC6209D222PR	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZP	-	XC6223F31BPR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZP	kc	XC6209H222PR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZR	-	XC6209D232PR	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZR	-	XC6223F32BPR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZR	kc	XC6209H232PR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZS	-	XC6209D242PR	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZS	-	XC6223F33BPR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZS	kc	XC6209H242PR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZT	-	XC6209D252PR	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZT	-	XC6223F34BPR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZT	kc	XC6209H252PR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZU	-	XC6209D262PR	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZU	-	XC6223F35BPR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZU	kc	XC6209H262PR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZV	-	XC6209D272PR	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZV	-	XC6223F36BPR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZV	kc	XC6209H272PR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZX	-	XC6209D282PR	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZX	-	XC6223F37BPR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZX	kc	XC6209H282PR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZY	-	XC6209D292PR	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZY	-	XC6223F38BPR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZY	kc	XC6209H292PR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZZ	-	XC6209D302PR	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
9ZZ	-	XC6223F39BPR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL, ICP	SOT-89-5	32um	VR4	6n	Tor
9ZZ	kc	XC6209H302PR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SOT-89-5	32um	VR4	6h	Tor
A07B	-	RP111H071B	LVR-IC	LDO, 0.7V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A07D	-	RP111H071D	LVR-IC	LDO, 0.7V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A08B	-	RP111H081B	LVR-IC	LDO, 0.8V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A08D	-	RP111H081D	LVR-IC	LDO, 0.8V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A09B	-	RP111H091B	LVR-IC	LDO, 0.9V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A09D	-	RP111H091D	LVR-IC	LDO, 0.9V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A10B	-	RP111H101B	LVR-IC	LDO, 1.0V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A10D	-	RP111H101D	LVR-IC	LDO, 1.0V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A11B	-	RP111H111B	LVR-IC	LDO, 1.1V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A11D	-	RP111H111D	LVR-IC	LDO, 1.1V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A12B	-	RP111H121B	LVR-IC	LDO, 1.2V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A12D	-	RP111H121D	LVR-IC	LDO, 1.2V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A13B	-	RP111H131B	LVR-IC	LDO, 1.3V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A13D	-	RP111H131D	LVR-IC	LDO, 1.3V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A14B	-	RP111H141B	LVR-IC	LDO, 1.4V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A14D	-	RP111H141D	LVR-IC	LDO, 1.4V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A15B	-	RP111H151B	LVR-IC	LDO, 1.5V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A15D	-	RP111H151D	LVR-IC	LDO, 1.5V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A16B	-	RP111H161B	LVR-IC	LDO, 1.6V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A16D	-	RP111H161D	LVR-IC	LDO, 1.6V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A17B	-	RP111H171B	LVR-IC	LDO, 1.7V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A17D	-	RP111H171D	LVR-IC	LDO, 1.7V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A18B	-	RP111H181B	LVR-IC	LDO, 1.8V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A18D	-	RP111H181D	LVR-IC	LDO, 1.8V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A19B	-	RP111H191B	LVR-IC	LDO, 1.9V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A19D	-	RP111H191D	LVR-IC	LDO, 1.9V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A20	ka	XC6371C201P	DC-DC-IC	PWM step-up, 100kHz, 2.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A20B	-	RP111H201B	LVR-IC	LDO, 2.0V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A20D	-	RP111H201D	LVR-IC	LDO, 2.0V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A21	ka	XC6371C211P	DC-DC-IC	PWM step-up, 100kHz, 2.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A21B	-	RP111H211B	LVR-IC	LDO, 2.1V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A21D	-	RP111H211D	LVR-IC	LDO, 2.1V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A22	ka	XC6371C221P	DC-DC-IC	PWM step-up, 100kHz, 2.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A22B	-	RP111H221B	LVR-IC	LDO, 2.2V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A22D	-	RP111H221D	LVR-IC	LDO, 2.2V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A23	ka	XC6371C231P	DC-DC-IC	PWM step-up, 100kHz, 2.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A23B	-	RP111H231B	LVR-IC	LDO, 2.3V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A23D	-	RP111H231D	LVR-IC	LDO, 2.3V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A24	ka	XC6371C241P	DC-DC-IC	PWM step-up, 100kHz, 2.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A24B	-	RP111H241B	LVR-IC	LDO, 2.4V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A24D	-	RP111H241D	LVR-IC	LDO, 2.4V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A25	ka	XC6371C251P	DC-DC-IC	PWM step-up, 100kHz, 2.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A25B	-	RP111H251B	LVR-IC	LDO, 2.5V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A25D	-	RP111H251D	LVR-IC	LDO, 2.5V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A26	ka	XC6371C261P	DC-DC-IC	PWM step-up, 100kHz, 2.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A26B	-	RP111H261B	LVR-IC	LDO, 2.6V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A26D	-	RP111H261D	LVR-IC	LDO, 2.6V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A27	ka	XC6371C271P	DC-DC-IC	PWM step-up, 100kHz, 2.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A27B	-	RP111H271B	LVR-IC	LDO, 2.7V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A27D	-	RP111H271D	LVR-IC	LDO, 2.7V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A28	ka	XC6371C281P	DC-DC-IC	PWM step-up, 100kHz, 2.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A28B	-	RP111H281B	LVR-IC	LDO, 2.8V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A28D	-	RP111H281D	LVR-IC	LDO, 2.8V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A29	ka	XC6371C291P	DC-DC-IC	PWM step-up, 100kHz, 2.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A29B	-	RP111H291B	LVR-IC	LDO, 2.9V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A29D	-	RP111H291D	LVR-IC	LDO, 2.9V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A2A	ka	XC6371C202P	DC-DC-IC	PWM step-up, 180kHz, 2.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A2B	ka	XC6371C212P	DC-DC-IC	PWM step-up, 180kHz, 2.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A2C	ka	XC6371C222P	DC-DC-IC	PWM step-up, 180kHz, 2.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A2D	ka	XC6371C232P	DC-DC-IC	PWM step-up, 180kHz, 2.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A2E	ka	XC6371C242P	DC-DC-IC	PWM step-up, 180kHz, 2.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A2F	ka	XC6371C252P	DC-DC-IC	PWM step-up, 180kHz, 2.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A2H	ka	XC6371C262P	DC-DC-IC	PWM step-up, 180kHz, 2.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A2K	ka	XC6371C272P	DC-DC-IC	PWM step-up, 180kHz, 2.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A2L	ka	XC6371C282P	DC-DC-IC	PWM step-up, 180kHz, 2.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A2M	ka	XC6371C292P	DC-DC-IC	PWM step-up, 180kHz, 2.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A30	ka	XC6371C301P	DC-DC-IC	PWM step-up, 100kHz, 3.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A30B	-	RP111H301B	LVR-IC	LDO, 3.0V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A30D	-	RP111H301D	LVR-IC	LDO, 3.0V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A31	ka	XC6371C311P	DC-DC-IC	PWM step-up, 100kHz, 3.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A31B	-	RP111H311B	LVR-IC	LDO, 3.1V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A31D	-	RP111H311D	LVR-IC	LDO, 3.1V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A32	ka	XC6371C321P	DC-DC-IC	PWM step-up, 100kHz, 3.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A32B	-	RP111H321B	LVR-IC	LDO, 3.2V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A32D	-	RP111H321D	LVR-IC	LDO, 3.2V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A33	ka	XC6371C331P	DC-DC-IC	PWM step-up, 100kHz, 3.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A33B	-	RP111H331B	LVR-IC	LDO, 3.3V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A33D	-	RP111H331D	LVR-IC	LDO, 3.3V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A34	ka	XC6371C341P	DC-DC-IC	PWM step-up, 100kHz, 3.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A34B	-	RP111H341B	LVR-IC	LDO, 3.4V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A34D	-	RP111H341D	LVR-IC	LDO, 3.4V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A35	ka	XC6371C351P	DC-DC-IC	PWM step-up, 100kHz, 3.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A35B	-	RP111H351B	LVR-IC	LDO, 3.5V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A35D	-	RP111H351D	LVR-IC	LDO, 3.5V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A36	ka	XC6371C361P	DC-DC-IC	PWM step-up, 100kHz, 3.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A36B	-	RP111H361B	LVR-IC	LDO, 3.6V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A36D	-	RP111H361D	LVR-IC	LDO, 3.6V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A37	ka	XC6371C371P	DC-DC-IC	PWM step-up, 100kHz, 3.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A37B	-	RP111H071B5	LVR-IC	LDO, 0.75V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A37D	-	RP111H071D5	LVR-IC	LDO, 0.75V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A38	ka	XC6371C381P	DC-DC-IC	PWM step-up, 100kHz, 3.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A38B	-	RP111H121B5	LVR-IC	LDO, 1.25V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A38D	-	RP111H121D5	LVR-IC	LDO, 1.25V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A39	ka	XC6371C391P	DC-DC-IC	PWM step-up, 100kHz, 3.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A39B	-	RP111H181B5	LVR-IC	LDO, 1.85V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A39D	-	RP111H181D5	LVR-IC	LDO, 1.85V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A3A	ka	XC6371C302P	DC-DC-IC	PWM step-up, 180kHz, 3.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A3B	ka	XC6371C312P	DC-DC-IC	PWM step-up, 180kHz, 3.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A3C	ka	XC6371C322P	DC-DC-IC	PWM step-up, 180kHz, 3.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A3D	ka	XC6371C332P	DC-DC-IC	PWM step-up, 180kHz, 3.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A3E	ka	XC6371C342P	DC-DC-IC	PWM step-up, 180kHz, 3.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A3F	ka	XC6371C352P	DC-DC-IC	PWM step-up, 180kHz, 3.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A3H	ka	XC6371C362P	DC-DC-IC	PWM step-up, 180kHz, 3.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A3K	ka	XC6371C372P	DC-DC-IC	PWM step-up, 180kHz, 3.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A3L	ka	XC6371C382P	DC-DC-IC	PWM step-up, 180kHz, 3.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A3M	ka	XC6371C392P	DC-DC-IC	PWM step-up, 180kHz, 3.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A40	ka	XC6371C401P	DC-DC-IC	PWM step-up, 100kHz, 4.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A40B	-	RP111H281B5	LVR-IC	LDO, 2.85V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A40D	-	RP111H281D5	LVR-IC	LDO, 2.85V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A41	ka	XC6371C411P	DC-DC-IC	PWM step-up, 100kHz, 4.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A41B	-	RP111H101B5	LVR-IC	LDO, 1.05V±0.8%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
A41D	-	RP111H101D5	LVR-IC	LDO, 1.05V±0.8%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
A42	ka	XC6371C421P	DC-DC-IC	PWM step-up, 100kHz, 4.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A43	ka	XC6371C431P	DC-DC-IC	PWM step-up, 100kHz, 4.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A44	ka	XC6371C441P	DC-DC-IC	PWM step-up, 100kHz, 4.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A45	ka	XC6371C451P	DC-DC-IC	PWM step-up, 100kHz, 4.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A46	ka	XC6371C461P	DC-DC-IC	PWM step-up, 100kHz, 4.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A47	ka	XC6371C471P	DC-DC-IC	PWM step-up, 100kHz, 4.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A48	ka	XC6371C481P	DC-DC-IC	PWM step-up, 100kHz, 4.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A49	ka	XC6371C491P	DC-DC-IC	PWM step-up, 100kHz, 4.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A4A	ka	XC6371C402P	DC-DC-IC	PWM step-up, 180kHz, 4.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A4B	ka	XC6371C412P	DC-DC-IC	PWM step-up, 180kHz, 4.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A4C	ka	XC6371C422P	DC-DC-IC	PWM step-up, 180kHz, 4.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A4D	ka	XC6371C432P	DC-DC-IC	PWM step-up, 180kHz, 4.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A4E	ka	XC6371C442P	DC-DC-IC	PWM step-up, 180kHz, 4.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A4F	ka	XC6371C452P	DC-DC-IC	PWM step-up, 180kHz, 4.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A4H	ka	XC6371C462P	DC-DC-IC	PWM step-up, 180kHz, 4.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A4K	ka	XC6371C472P	DC-DC-IC	PWM step-up, 180kHz, 4.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A4L	ka	XC6371C482P	DC-DC-IC	PWM step-up, 180kHz, 4.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A4M	ka	XC6371C492P	DC-DC-IC	PWM step-up, 180kHz, 4.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A50	ka	XC6371C501P	DC-DC-IC	PWM step-up, 100kHz, 5.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A51	ka	XC6371C511P	DC-DC-IC	PWM step-up, 100kHz, 5.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A52	ka	XC6371C521P	DC-DC-IC	PWM step-up, 100kHz, 5.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A53	ka	XC6371C531P	DC-DC-IC	PWM step-up, 100kHz, 5.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A54	ka	XC6371C541P	DC-DC-IC	PWM step-up, 100kHz, 5.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A55	ka	XC6371C551P	DC-DC-IC	PWM step-up, 100kHz, 5.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A56	ka	XC6371C561P	DC-DC-IC	PWM step-up, 100kHz, 5.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A57	ka	XC6371C571P	DC-DC-IC	PWM step-up, 100kHz, 5.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A58	ka	XC6371C581P	DC-DC-IC	PWM step-up, 100kHz, 5.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A59	ka	XC6371C591P	DC-DC-IC	PWM step-up, 100kHz, 5.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A5A	ka	XC6371C502P	DC-DC-IC	PWM step-up, 180kHz, 5.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A5B	ka	XC6371C512P	DC-DC-IC	PWM step-up, 180kHz, 5.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A5C	ka	XC6371C522P	DC-DC-IC	PWM step-up, 180kHz, 5.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A5D	ka	XC6371C532P	DC-DC-IC	PWM step-up, 180kHz, 5.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A5E	ka	XC6371C542P	DC-DC-IC	PWM step-up, 180kHz, 5.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A5F	ka	XC6371C552P	DC-DC-IC	PWM step-up, 180kHz, 5.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A5H	ka	XC6371C562P	DC-DC-IC	PWM step-up, 180kHz, 5.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A5K	ka	XC6371C572P	DC-DC-IC	PWM step-up, 180kHz, 5.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A5L	ka	XC6371C582P	DC-DC-IC	PWM step-up, 180kHz, 5.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A5M	ka	XC6371C592P	DC-DC-IC	PWM step-up, 180kHz, 5.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A60	ka	XC6371C601P	DC-DC-IC	PWM step-up, 100kHz, 6.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A61	ka	XC6371C611P	DC-DC-IC	PWM step-up, 100kHz, 6.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A62	ka	XC6371C621P	DC-DC-IC	PWM step-up, 100kHz, 6.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A63	ka	XC6371C631P	DC-DC-IC	PWM step-up, 100kHz, 6.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A64	ka	XC6371C641P	DC-DC-IC	PWM step-up, 100kHz, 6.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A65	ka	XC6371C651P	DC-DC-IC	PWM step-up, 100kHz, 6.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A66	ka	XC6371C661P	DC-DC-IC	PWM step-up, 100kHz, 6.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A67	ka	XC6371C671P	DC-DC-IC	PWM step-up, 100kHz, 6.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A68	ka	XC6371C681P	DC-DC-IC	PWM step-up, 100kHz, 6.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A69	ka	XC6371C691P	DC-DC-IC	PWM step-up, 100kHz, 6.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A6A	ka	XC6371C602P	DC-DC-IC	PWM step-up, 180kHz, 6.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A6B	ka	XC6371C612P	DC-DC-IC	PWM step-up, 180kHz, 6.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A6C	ka	XC6371C622P	DC-DC-IC	PWM step-up, 180kHz, 6.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A6D	ka	XC6371C632P	DC-DC-IC	PWM step-up, 180kHz, 6.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A6E	ka	XC6371C642P	DC-DC-IC	PWM step-up, 180kHz, 6.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A6F	ka	XC6371C652P	DC-DC-IC	PWM step-up, 180kHz, 6.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A6H	ka	XC6371C662P	DC-DC-IC	PWM step-up, 180kHz, 6.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A6K	ka	XC6371C672P	DC-DC-IC	PWM step-up, 180kHz, 6.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A6L	ka	XC6371C682P	DC-DC-IC	PWM step-up, 180kHz, 6.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A6M	ka	XC6371C692P	DC-DC-IC	PWM step-up, 180kHz, 6.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A70	ka	XC6371C701P	DC-DC-IC	PWM step-up, 100kHz, 7.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
A7A	ka	XC6371C702P	DC-DC-IC	PWM step-up, 180kHz, 7.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AA8	-	XC9260A08CPR-G	DC-DC-IC	PWM step-down, 0.8V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AA9	-	XC9260A09CPR-G	DC-DC-IC	PWM step-down, 0.9V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AAL	-	XC9260A0LCPR-G	DC-DC-IC	PWM step-down, 0.85V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AAM	-	XC9260A0MCPR-G	DC-DC-IC	PWM step-down, 0.95V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AB0	-	XC9260A10CPR-G	DC-DC-IC	PWM step-down, 1.0V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AB1	-	XC9260A11CPR-G	DC-DC-IC	PWM step-down, 1.1V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AB2	-	XC9260A12CPR-G	DC-DC-IC	PWM step-down, 1.2V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AB3	-	XC9260A13CPR-G	DC-DC-IC	PWM step-down, 1.3V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AB4	-	XC9260A14CPR-G	DC-DC-IC	PWM step-down, 1.4V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AB5	-	XC9260A15CPR-G	DC-DC-IC	PWM step-down, 1.5V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AB6	-	XC9260A16CPR-G	DC-DC-IC	PWM step-down, 1.6V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AB7	-	XC9260A17CPR-G	DC-DC-IC	PWM step-down, 1.7V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AB8	-	XC9260A18CPR-G	DC-DC-IC	PWM step-down, 1.8V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AB9	-	XC9260A19CPR-G	DC-DC-IC	PWM step-down, 1.9V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ABA	-	XC9260A1ACPR-G	DC-DC-IC	PWM step-down, 1.05V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ABB	-	XC9260A1BCPR-G	DC-DC-IC	PWM step-down, 1.15V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ABC	-	XC9260A1CCPR-G	DC-DC-IC	PWM step-down, 1.25V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ABD	-	XC9260A1DCPR-G	DC-DC-IC	PWM step-down, 1.35VV±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ABE	-	XC9260A1ECPR-G	DC-DC-IC	PWM step-down, 1.45V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ABF	-	XC9260A1FCPR-G	DC-DC-IC	PWM step-down, 1.55V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ABH	-	XC9260A1HCPR-G	DC-DC-IC	PWM step-down, 1.65V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ABK	-	XC9260A1KCPR-G	DC-DC-IC	PWM step-down, 1.75V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ABL	-	XC9260A1LCPR-G	DC-DC-IC	PWM step-down, 1.85V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ABM	-	XC9260A1MCPR-G	DC-DC-IC	PWM step-down, 1.95V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AC0	-	XC6373C200P	DC-DC-IC	PWM step-up, 30kHz, 2.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC0	-	XC9260A20CPR-G	DC-DC-IC	PWM step-down, 2.0V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AC0	ka	XC6371C200P	DC-DC-IC	PWM step-up, 50kHz, 2.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC0	kd	XC6373C200P	DC-DC-IC	PWM step-up, 30kHz, 2.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC1	-	XC6373C210P	DC-DC-IC	PWM step-up, 30kHz, 2.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC1	-	XC9260A21CPR-G	DC-DC-IC	PWM step-down, 2.1V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AC1	ka	XC6371C210P	DC-DC-IC	PWM step-up, 50kHz, 2.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC1	kd	XC6373C210P	DC-DC-IC	PWM step-up, 30kHz, 2.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC2	-	XC6373C220P	DC-DC-IC	PWM step-up, 30kHz, 2.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC2	-	XC9260A22CPR-G	DC-DC-IC	PWM step-down, 2.2V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AC2	ka	XC6371C220P	DC-DC-IC	PWM step-up, 50kHz, 2.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC2	kd	XC6373C220P	DC-DC-IC	PWM step-up, 30kHz, 2.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC3	-	XC6373C230P	DC-DC-IC	PWM step-up, 30kHz, 2.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC3	-	XC9260A23CPR-G	DC-DC-IC	PWM step-down, 2.3V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AC3	ka	XC6371C230P	DC-DC-IC	PWM step-up, 50kHz, 2.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC3	kd	XC6373C230P	DC-DC-IC	PWM step-up, 30kHz, 2.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC4	-	XC6373C240P	DC-DC-IC	PWM step-up, 30kHz, 2.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC4	-	XC9260A24CPR-G	DC-DC-IC	PWM step-down, 2.4V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AC4	ka	XC6371C240P	DC-DC-IC	PWM step-up, 50kHz, 2.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC4	kd	XC6373C240P	DC-DC-IC	PWM step-up, 30kHz, 2.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC5	-	XC6373C250P	DC-DC-IC	PWM step-up, 30kHz, 2.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC5	-	XC9260A25CPR-G	DC-DC-IC	PWM step-down, 2.5V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AC5	ka	XC6371C250P	DC-DC-IC	PWM step-up, 50kHz, 2.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC5	kd	XC6373C250P	DC-DC-IC	PWM step-up, 30kHz, 2.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC6	-	XC6373C260P	DC-DC-IC	PWM step-up, 30kHz, 2.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC6	-	XC9260A26CPR-G	DC-DC-IC	PWM step-down, 2.6V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AC6	ka	XC6371C260P	DC-DC-IC	PWM step-up, 50kHz, 2.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC6	kd	XC6373C260P	DC-DC-IC	PWM step-up, 30kHz, 2.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC7	-	XC6373C270P	DC-DC-IC	PWM step-up, 30kHz, 2.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC7	-	XC9260A27CPR-G	DC-DC-IC	PWM step-down, 2.7V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AC7	ka	XC6371C270P	DC-DC-IC	PWM step-up, 50kHz, 2.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC7	kd	XC6373C270P	DC-DC-IC	PWM step-up, 30kHz, 2.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC8	-	XC6373C280P	DC-DC-IC	PWM step-up, 30kHz, 2.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC8	-	XC9260A28CPR-G	DC-DC-IC	PWM step-down, 2.8V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AC8	ka	XC6371C280P	DC-DC-IC	PWM step-up, 50kHz, 2.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC8	kd	XC6373C280P	DC-DC-IC	PWM step-up, 30kHz, 2.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC9	-	XC6373C290P	DC-DC-IC	PWM step-up, 30kHz, 2.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC9	-	XC9260A29CPR-G	DC-DC-IC	PWM step-down, 2.9V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AC9	ka	XC6371C290P	DC-DC-IC	PWM step-up, 50kHz, 2.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AC9	kd	XC6373C290P	DC-DC-IC	PWM step-up, 30kHz, 2.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
ACA	-	XC9260A2ACPR-G	DC-DC-IC	PWM step-down, 2.05V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ACB	-	XC9260A2BCPR-G	DC-DC-IC	PWM step-down, 2.15V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ACC	-	XC9260A2CCPR-G	DC-DC-IC	PWM step-down, 2.25V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ACD	-	XC9260A2DCPR-G	DC-DC-IC	PWM step-down, 2.35V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ACE	-	XC9260A2ECPR-G	DC-DC-IC	PWM step-down, 2.45V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ACF	-	XC9260A2FCPR-G	DC-DC-IC	PWM step-down, 2.55V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ACH	-	XC9260A2HCPR-G	DC-DC-IC	PWM step-down, 2.65V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ACK	-	XC9260A2KCPR-G	DC-DC-IC	PWM step-down, 2.75V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ACL	-	XC9260A2LCPR-G	DC-DC-IC	PWM step-down, 2.85V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ACM	-	XC9260A2MCPR-G	DC-DC-IC	PWM step-down, 2.95V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AD0	-	XC6373C300P	DC-DC-IC	PWM step-up, 30kHz, 3.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD0	-	XC9260A30CPR-G	DC-DC-IC	PWM step-down, 3.0V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AD0	ka	XC6371C300P	DC-DC-IC	PWM step-up, 50kHz, 3.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD0	kd	XC6373C300P	DC-DC-IC	PWM step-up, 30kHz, 3.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD1	-	XC6373C310P	DC-DC-IC	PWM step-up, 30kHz, 3.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD1	-	XC9260A31CPR-G	DC-DC-IC	PWM step-down, 3.1V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AD1	ka	XC6371C310P	DC-DC-IC	PWM step-up, 50kHz, 3.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD1	kd	XC6373C310P	DC-DC-IC	PWM step-up, 30kHz, 3.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD2	-	XC6373C320P	DC-DC-IC	PWM step-up, 30kHz, 3.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD2	-	XC9260A32CPR-G	DC-DC-IC	PWM step-down, 3.2V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AD2	ka	XC6371C320P	DC-DC-IC	PWM step-up, 50kHz, 3.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD2	kd	XC6373C320P	DC-DC-IC	PWM step-up, 30kHz, 3.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD3	-	XC6373C330P	DC-DC-IC	PWM step-up, 30kHz, 3.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD3	-	XC9260A33CPR-G	DC-DC-IC	PWM step-down, 3.3V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AD3	ka	XC6371C330P	DC-DC-IC	PWM step-up, 50kHz, 3.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD3	kd	XC6373C330P	DC-DC-IC	PWM step-up, 30kHz, 3.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD4	-	XC6373C340P	DC-DC-IC	PWM step-up, 30kHz, 3.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD4	-	XC9260A34CPR-G	DC-DC-IC	PWM step-down, 3.4V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AD4	ka	XC6371C340P	DC-DC-IC	PWM step-up, 50kHz, 3.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD4	kd	XC6373C340P	DC-DC-IC	PWM step-up, 30kHz, 3.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD5	-	XC6373C350P	DC-DC-IC	PWM step-up, 30kHz, 3.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD5	-	XC9260A35CPR-G	DC-DC-IC	PWM step-down, 3.5V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AD5	ka	XC6371C350P	DC-DC-IC	PWM step-up, 50kHz, 3.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD5	kd	XC6373C350P	DC-DC-IC	PWM step-up, 30kHz, 3.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD6	-	XC6373C360P	DC-DC-IC	PWM step-up, 30kHz, 3.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD6	-	XC9260A36CPR-G	DC-DC-IC	PWM step-down, 3.6V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AD6	ka	XC6371C360P	DC-DC-IC	PWM step-up, 50kHz, 3.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD6	kd	XC6373C360P	DC-DC-IC	PWM step-up, 30kHz, 3.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD7	-	XC6373C370P	DC-DC-IC	PWM step-up, 30kHz, 3.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD7	ka	XC6371C370P	DC-DC-IC	PWM step-up, 50kHz, 3.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD7	kd	XC6373C370P	DC-DC-IC	PWM step-up, 30kHz, 3.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD8	-	XC6373C380P	DC-DC-IC	PWM step-up, 30kHz, 3.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD8	ka	XC6371C380P	DC-DC-IC	PWM step-up, 50kHz, 3.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD8	kd	XC6373C380P	DC-DC-IC	PWM step-up, 30kHz, 3.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD9	-	XC6373C390P	DC-DC-IC	PWM step-up, 30kHz, 3.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD9	ka	XC6371C390P	DC-DC-IC	PWM step-up, 50kHz, 3.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AD9	kd	XC6373C390P	DC-DC-IC	PWM step-up, 30kHz, 3.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
ADA	-	XC9260A3ACPR-G	DC-DC-IC	PWM step-down, 3.05V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ADB	-	XC9260A3BCPR-G	DC-DC-IC	PWM step-down, 3.15V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ADC	-	XC9260A3CCPR-G	DC-DC-IC	PWM step-down, 3.25V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ADD	-	XC9260A3DCPR-G	DC-DC-IC	PWM step-down, 3.35V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ADE	-	XC9260A3ECPR-G	DC-DC-IC	PWM step-down, 3.45V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ADF	-	XC9260A3FCPR-G	DC-DC-IC	PWM step-down, 3.55V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AE0	-	XC6373C400P	DC-DC-IC	PWM step-up, 30kHz, 4.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE0	ka	XC6371C400P	DC-DC-IC	PWM step-up, 50kHz, 4.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE0	kd	XC6373C400P	DC-DC-IC	PWM step-up, 30kHz, 4.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE1	-	XC6373C410P	DC-DC-IC	PWM step-up, 30kHz, 4.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE1	ka	XC6371C410P	DC-DC-IC	PWM step-up, 50kHz, 4.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE1	kd	XC6373C410P	DC-DC-IC	PWM step-up, 30kHz, 4.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE2	-	XC6373C420P	DC-DC-IC	PWM step-up, 30kHz, 4.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE2	ka	XC6371C420P	DC-DC-IC	PWM step-up, 50kHz, 4.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE2	kd	XC6373C420P	DC-DC-IC	PWM step-up, 30kHz, 4.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE3	-	XC6373C430P	DC-DC-IC	PWM step-up, 30kHz, 4.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE3	ka	XC6371C430P	DC-DC-IC	PWM step-up, 50kHz, 4.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE3	kd	XC6373C430P	DC-DC-IC	PWM step-up, 30kHz, 4.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE4	-	XC6373C440P	DC-DC-IC	PWM step-up, 30kHz, 4.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE4	ka	XC6371C440P	DC-DC-IC	PWM step-up, 50kHz, 4.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE4	kd	XC6373C440P	DC-DC-IC	PWM step-up, 30kHz, 4.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE5	-	XC6373C450P	DC-DC-IC	PWM step-up, 30kHz, 4.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE5	ka	XC6371C450P	DC-DC-IC	PWM step-up, 50kHz, 4.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE5	kd	XC6373C450P	DC-DC-IC	PWM step-up, 30kHz, 4.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE6	-	XC6373C460P	DC-DC-IC	PWM step-up, 30kHz, 4.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE6	ka	XC6371C460P	DC-DC-IC	PWM step-up, 50kHz, 4.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AE6	kd	XC6373C460P	DC-DC-IC	PWM step-up, 30kHz, 4.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE7	-	XC6373C470P	DC-DC-IC	PWM step-up, 30kHz, 4.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE7	ka	XC6371C470P	DC-DC-IC	PWM step-up, 50kHz, 4.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE7	kd	XC6373C470P	DC-DC-IC	PWM step-up, 30kHz, 4.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE8	-	XC6373C480P	DC-DC-IC	PWM step-up, 30kHz, 4.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE8	-	XC9260A08DPR-G	DC-DC-IC	PWM step-down, 0.8V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AE8	ka	XC6371C480P	DC-DC-IC	PWM step-up, 50kHz, 4.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE8	kd	XC6373C480P	DC-DC-IC	PWM step-up, 30kHz, 4.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE9	-	XC6373C490P	DC-DC-IC	PWM step-up, 30kHz, 4.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE9	-	XC9260A09DPR-G	DC-DC-IC	PWM step-down, 0.9V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AE9	ka	XC6371C490P	DC-DC-IC	PWM step-up, 50kHz, 4.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AE9	kd	XC6373C490P	DC-DC-IC	PWM step-up, 30kHz, 4.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AEL	-	XC9260A0LDPR-G	DC-DC-IC	PWM step-down, 0.85V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AEM	-	XC9260A0MDPR-G	DC-DC-IC	PWM step-down, 0.95V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AF0	-	XC6373C500P	DC-DC-IC	PWM step-up, 30kHz, 5.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF0	-	XC9260A10DPR-G	DC-DC-IC	PWM step-down, 1.0V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AF0	ka	XC6371C500P	DC-DC-IC	PWM step-up, 50kHz, 5.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF0	kd	XC6373C500P	DC-DC-IC	PWM step-up, 30kHz, 5.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF1	-	XC6373C510P	DC-DC-IC	PWM step-up, 30kHz, 5.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF1	-	XC9260A11DPR-G	DC-DC-IC	PWM step-down, 1.1V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AF1	ka	XC6371C510P	DC-DC-IC	PWM step-up, 50kHz, 5.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF1	kd	XC6373C510P	DC-DC-IC	PWM step-up, 30kHz, 5.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF2	-	XC6373C520P	DC-DC-IC	PWM step-up, 30kHz, 5.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF2	-	XC9260A12DPR-G	DC-DC-IC	PWM step-down, 1.2V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AF2	ka	XC6371C520P	DC-DC-IC	PWM step-up, 50kHz, 5.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF2	kd	XC6373C520P	DC-DC-IC	PWM step-up, 30kHz, 5.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF3	-	XC6373C530P	DC-DC-IC	PWM step-up, 30kHz, 5.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF3	-	XC9260A13DPR-G	DC-DC-IC	PWM step-down, 1.3V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AF3	ka	XC6371C530P	DC-DC-IC	PWM step-up, 50kHz, 5.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF3	kd	XC6373C530P	DC-DC-IC	PWM step-up, 30kHz, 5.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF4	-	XC6373C540P	DC-DC-IC	PWM step-up, 30kHz, 5.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF4	-	XC9260A14DPR-G	DC-DC-IC	PWM step-down, 1.4V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AF4	ka	XC6371C540P	DC-DC-IC	PWM step-up, 50kHz, 5.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF4	kd	XC6373C540P	DC-DC-IC	PWM step-up, 30kHz, 5.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF5	-	XC6373C550P	DC-DC-IC	PWM step-up, 30kHz, 5.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF5	-	XC9260A15DPR-G	DC-DC-IC	PWM step-down, 1.5V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AF5	ka	XC6371C550P	DC-DC-IC	PWM step-up, 50kHz, 5.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF5	kd	XC6373C550P	DC-DC-IC	PWM step-up, 30kHz, 5.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF6	-	XC6373C560P	DC-DC-IC	PWM step-up, 30kHz, 5.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF6	-	XC9260A16DPR-G	DC-DC-IC	PWM step-down, 1.6V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AF6	ka	XC6371C560P	DC-DC-IC	PWM step-up, 50kHz, 5.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF6	kd	XC6373C560P	DC-DC-IC	PWM step-up, 30kHz, 5.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF7	-	XC6373C570P	DC-DC-IC	PWM step-up, 30kHz, 5.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF7	-	XC9260A17DPR-G	DC-DC-IC	PWM step-down, 1.7V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AF7	ka	XC6371C570P	DC-DC-IC	PWM step-up, 50kHz, 5.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF7	kd	XC6373C570P	DC-DC-IC	PWM step-up, 30kHz, 5.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF8	-	XC6373C580P	DC-DC-IC	PWM step-up, 30kHz, 5.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF8	-	XC9260A18DPR-G	DC-DC-IC	PWM step-down, 1.8V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AF8	ka	XC6371C580P	DC-DC-IC	PWM step-up, 50kHz, 5.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF8	kd	XC6373C580P	DC-DC-IC	PWM step-up, 30kHz, 5.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF9	-	XC6373C590P	DC-DC-IC	PWM step-up, 30kHz, 5.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF9	-	XC9260A19DPR-G	DC-DC-IC	PWM step-down, 1.9V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AF9	ka	XC6371C590P	DC-DC-IC	PWM step-up, 50kHz, 5.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AF9	kd	XC6373C590P	DC-DC-IC	PWM step-up, 30kHz, 5.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AFA	-	XC9260A1ADPR-G	DC-DC-IC	PWM step-down, 1.05V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AFB	-	XC9260A1BDPR-G	DC-DC-IC	PWM step-down, 1.15V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AFC	-	XC9260A1CDPR-G	DC-DC-IC	PWM step-down, 1.25V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AFD	-	XC9260A1DDPR-G	DC-DC-IC	PWM step-down, 1.35VV±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AFE	-	XC9260A1EDPR-G	DC-DC-IC	PWM step-down, 1.45V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AFF	-	XC9260A1FDPR-G	DC-DC-IC	PWM step-down, 1.55V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AFH	-	XC9260A1HDPR-G	DC-DC-IC	PWM step-down, 1.65V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AFK	-	XC9260A1KDPR-G	DC-DC-IC	PWM step-down, 1.75V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AFL	-	XC9260A1LDPR-G	DC-DC-IC	PWM step-down, 1.85V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AFM	-	XC9260A1MDPR-G	DC-DC-IC	PWM step-down, 1.95V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AH0	-	XC6373C600P	DC-DC-IC	PWM step-up, 30kHz, 6.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH0	ka	XC6371C600P	DC-DC-IC	PWM step-up, 50kHz, 6.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH0	kd	XC6373C600P	DC-DC-IC	PWM step-up, 30kHz, 6.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH1	-	XC6373C610P	DC-DC-IC	PWM step-up, 30kHz, 6.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH1	ka	XC6371C610P	DC-DC-IC	PWM step-up, 50kHz, 6.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH1	kd	XC6373C610P	DC-DC-IC	PWM step-up, 30kHz, 6.1V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AH2	-	XC6373C620P	DC-DC-IC	PWM step-up, 30kHz, 6.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH2	ka	XC6371C620P	DC-DC-IC	PWM step-up, 50kHz, 6.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH2	kd	XC6373C620P	DC-DC-IC	PWM step-up, 30kHz, 6.2V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH3	-	XC6373C630P	DC-DC-IC	PWM step-up, 30kHz, 6.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH3	ka	XC6371C630P	DC-DC-IC	PWM step-up, 50kHz, 6.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH3	kd	XC6373C630P	DC-DC-IC	PWM step-up, 30kHz, 6.3V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH4	-	XC6373C640P	DC-DC-IC	PWM step-up, 30kHz, 6.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH4	ka	XC6371C640P	DC-DC-IC	PWM step-up, 50kHz, 6.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH4	kd	XC6373C640P	DC-DC-IC	PWM step-up, 30kHz, 6.4V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH5	-	XC6373C650P	DC-DC-IC	PWM step-up, 30kHz, 6.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH5	ka	XC6371C650P	DC-DC-IC	PWM step-up, 50kHz, 6.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH5	kd	XC6373C650P	DC-DC-IC	PWM step-up, 30kHz, 6.5V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH6	-	XC6373C660P	DC-DC-IC	PWM step-up, 30kHz, 6.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH6	ka	XC6371C660P	DC-DC-IC	PWM step-up, 50kHz, 6.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH6	kd	XC6373C660P	DC-DC-IC	PWM step-up, 30kHz, 6.6V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH7	-	XC6373C670P	DC-DC-IC	PWM step-up, 30kHz, 6.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH7	ka	XC6371C670P	DC-DC-IC	PWM step-up, 50kHz, 6.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH7	kd	XC6373C670P	DC-DC-IC	PWM step-up, 30kHz, 6.7V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH8	-	XC6373C680P	DC-DC-IC	PWM step-up, 30kHz, 6.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH8	ka	XC6371C680P	DC-DC-IC	PWM step-up, 50kHz, 6.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH8	kd	XC6373C680P	DC-DC-IC	PWM step-up, 30kHz, 6.8V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH9	-	XC6373C690P	DC-DC-IC	PWM step-up, 30kHz, 6.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH9	ka	XC6371C690P	DC-DC-IC	PWM step-up, 50kHz, 6.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AH9	kd	XC6373C690P	DC-DC-IC	PWM step-up, 30kHz, 6.9V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AK0	-	XC6373C700P	DC-DC-IC	PWM step-up, 30kHz, 7.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AK0	ka	XC6371C700P	DC-DC-IC	PWM step-up, 50kHz, 7.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AK0	kd	XC6373C700P	DC-DC-IC	PWM step-up, 30kHz, 7.0V±2.5%, 100mA, +CE	SOT-89-5	32gb	DC3	6h	Tor
AL0	-	XC9260A20DPR-G	DC-DC-IC	PWM step-down, 2.0V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AL1	-	XC9260A21DPR-G	DC-DC-IC	PWM step-down, 2.1V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AL2	-	XC9260A22DPR-G	DC-DC-IC	PWM step-down, 2.2V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AL3	-	XC9260A23DPR-G	DC-DC-IC	PWM step-down, 2.3V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AL4	-	XC9260A24DPR-G	DC-DC-IC	PWM step-down, 2.4V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AL5	-	XC9260A25DPR-G	DC-DC-IC	PWM step-down, 2.5V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AL6	-	XC9260A26DPR-G	DC-DC-IC	PWM step-down, 2.6V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AL7	-	XC9260A27DPR-G	DC-DC-IC	PWM step-down, 2.7V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AL8	-	XC9260A28DPR-G	DC-DC-IC	PWM step-down, 2.8V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AL9	-	XC9260A29DPR-G	DC-DC-IC	PWM step-down, 2.9V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ALA	-	XC9260A2ADPR-G	DC-DC-IC	PWM step-down, 2.05V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ALB	-	XC9260A2BDPR-G	DC-DC-IC	PWM step-down, 2.15V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ALC	-	XC9260A2CDPR-G	DC-DC-IC	PWM step-down, 2.25V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ALD	-	XC9260A2DDPR-G	DC-DC-IC	PWM step-down, 2.35V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ALE	-	XC9260A2EDPR-G	DC-DC-IC	PWM step-down, 2.45V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ALF	-	XC9260A2FDPR-G	DC-DC-IC	PWM step-down, 2.55V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ALH	-	XC9260A2HDPR-G	DC-DC-IC	PWM step-down, 2.65V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ALK	-	XC9260A2KDPR-G	DC-DC-IC	PWM step-down, 2.75V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ALL	-	XC9260A2LDPR-G	DC-DC-IC	PWM step-down, 2.85V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ALM	-	XC9260A2MDPR-G	DC-DC-IC	PWM step-down, 2.95V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AM0	-	XC9260A30DPR-G	DC-DC-IC	PWM step-down, 3.0V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AM1	-	XC9260A31DPR-G	DC-DC-IC	PWM step-down, 3.1V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AM2	-	XC9260A32DPR-G	DC-DC-IC	PWM step-down, 3.2V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AM3	-	XC9260A33DPR-G	DC-DC-IC	PWM step-down, 3.3V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AM4	-	XC9260A34DPR-G	DC-DC-IC	PWM step-down, 3.4V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AM5	-	XC9260A35DPR-G	DC-DC-IC	PWM step-down, 3.5V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AM6	-	XC9260A36DPR-G	DC-DC-IC	PWM step-down, 3.6V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AMA	-	XC9260A3ADPR-G	DC-DC-IC	PWM step-down, 3.05V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AMB	-	XC9260A3BDPR-G	DC-DC-IC	PWM step-down, 3.15V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AMC	-	XC9260A3CDPR-G	DC-DC-IC	PWM step-down, 3.25V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AMD	-	XC9260A3DDPR-G	DC-DC-IC	PWM step-down, 3.35V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AME	-	XC9260A3EDPR-G	DC-DC-IC	PWM step-down, 3.45V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AMF	-	XC9260A3FDPR-G	DC-DC-IC	PWM step-down, 3.55V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AN8	-	XC9261A08CPR-G	DC-DC-IC	PWM/PFM step-down, 0.8V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AN9	-	XC9261A09CPR-G	DC-DC-IC	PWM/PFM step-down, 0.9V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ANL	-	XC9261A0LCPR-G	DC-DC-IC	PWM/PFM step-down, 0.85V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ANM	-	XC9261A0MCPR-G	DC-DC-IC	PWM/PFM step-down, 0.95V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AP0	-	XC9261A10CPR-G	DC-DC-IC	PWM/PFM step-down, 1.0V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AP1	-	XC9261A11CPR-G	DC-DC-IC	PWM/PFM step-down, 1.1V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AP2	-	XC9261A12CPR-G	DC-DC-IC	PWM/PFM step-down, 1.2V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AP3	-	XC9261A13CPR-G	DC-DC-IC	PWM/PFM step-down, 1.3V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AP4	-	XC9261A14CPR-G	DC-DC-IC	PWM/PFM step-down, 1.4V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AP5	-	XC9261A15CPR-G	DC-DC-IC	PWM/PFM step-down, 1.5V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AP6	-	XC9261A16CPR-G	DC-DC-IC	PWM/PFM step-down, 1.6V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AP7	-	XC9261A17CPR-G	DC-DC-IC	PWM/PFM step-down, 1.7V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AP8	-	XC9261A18CPR-G	DC-DC-IC	PWM/PFM step-down, 1.8V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AP9	-	XC9261A19CPR-G	DC-DC-IC	PWM/PFM step-down, 1.9V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
APA	-	XC9261A1ACPR-G	DC-DC-IC	PWM/PFM step-down, 1.05V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
APB	-	XC9261A1BCPR-G	DC-DC-IC	PWM/PFM step-down, 1.15V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
APC	-	XC9261A1CCPR-G	DC-DC-IC	PWM/PFM step-down, 1.25V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
APD	-	XC9261A1DCPR-G	DC-DC-IC	PWM/PFM step-down, 1.35VV±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
APE	-	XC9261A1ECPR-G	DC-DC-IC	PWM/PFM step-down, 1.45V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
APF	-	XC9261A1FCPR-G	DC-DC-IC	PWM/PFM step-down, 1.55V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
APH	-	XC9261A1HCPR-G	DC-DC-IC	PWM/PFM step-down, 1.65V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
APK	-	XC9261A1KCPR-G	DC-DC-IC	PWM/PFM step-down, 1.75V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
APL	-	XC9261A1LCPR-G	DC-DC-IC	PWM/PFM step-down, 1.85V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
APM	-	XC9261A1MCPR-G	DC-DC-IC	PWM/PFM step-down, 1.95V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AR0	-	XC9261A20CPR-G	DC-DC-IC	PWM/PFM step-down, 2.0V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AR1	-	XC9261A21CPR-G	DC-DC-IC	PWM/PFM step-down, 2.1V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AR2	-	XC9261A22CPR-G	DC-DC-IC	PWM/PFM step-down, 2.2V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AR3	-	XC9261A23CPR-G	DC-DC-IC	PWM/PFM step-down, 2.3V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AR4	-	XC9261A24CPR-G	DC-DC-IC	PWM/PFM step-down, 2.4V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AR5	-	XC9261A25CPR-G	DC-DC-IC	PWM/PFM step-down, 2.5V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AR6	-	XC9261A26CPR-G	DC-DC-IC	PWM/PFM step-down, 2.6V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AR7	-	XC9261A27CPR-G	DC-DC-IC	PWM/PFM step-down, 2.7V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AR8	-	XC9261A28CPR-G	DC-DC-IC	PWM/PFM step-down, 2.8V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AR9	-	XC9261A29CPR-G	DC-DC-IC	PWM/PFM step-down, 2.9V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ARA	-	XC9261A2ACPR-G	DC-DC-IC	PWM/PFM step-down, 2.05V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ARB	-	XC9261A2BCPR-G	DC-DC-IC	PWM/PFM step-down, 2.15V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ARC	-	XC9261A2CCPR-G	DC-DC-IC	PWM/PFM step-down, 2.25V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ARD	-	XC9261A2DCPR-G	DC-DC-IC	PWM/PFM step-down, 2.35V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ARE	-	XC9261A2ECPR-G	DC-DC-IC	PWM/PFM step-down, 2.45V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ARF	-	XC9261A2FCPR-G	DC-DC-IC	PWM/PFM step-down, 2.55V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ARH	-	XC9261A2HCPR-G	DC-DC-IC	PWM/PFM step-down, 2.65V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ARK	-	XC9261A2KCPR-G	DC-DC-IC	PWM/PFM step-down, 2.75V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ARL	-	XC9261A2LCPR-G	DC-DC-IC	PWM/PFM step-down, 2.85V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ARM	-	XC9261A2MCPR-G	DC-DC-IC	PWM/PFM step-down, 2.95V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AT0	-	XC9261A30CPR-G	DC-DC-IC	PWM/PFM step-down, 3.0V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AT1	-	XC9261A31CPR-G	DC-DC-IC	PWM/PFM step-down, 3.1V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AT2	-	XC9261A32CPR-G	DC-DC-IC	PWM/PFM step-down, 3.2V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AT3	-	XC9261A33CPR-G	DC-DC-IC	PWM/PFM step-down, 3.3V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AT4	-	XC9261A34CPR-G	DC-DC-IC	PWM/PFM step-down, 3.4V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AT5	-	XC9261A35CPR-G	DC-DC-IC	PWM/PFM step-down, 3.5V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AT6	-	XC9261A36CPR-G	DC-DC-IC	PWM/PFM step-down, 3.6V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ATA	-	XC9261A3ACPR-G	DC-DC-IC	PWM/PFM step-down, 3.05V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ATB	-	XC9261A3BCPR-G	DC-DC-IC	PWM/PFM step-down, 3.15V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ATC	-	XC9261A3CCPR-G	DC-DC-IC	PWM/PFM step-down, 3.25V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ATD	-	XC9261A3DCPR-G	DC-DC-IC	PWM/PFM step-down, 3.35V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ATE	-	XC9261A3ECPR-G	DC-DC-IC	PWM/PFM step-down, 3.45V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
ATF	-	XC9261A3FCPR-G	DC-DC-IC	PWM/PFM step-down, 3.55V±2%, 1.5A, 1.2MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AU8	-	XC9261A08DPR-G	DC-DC-IC	PWM/PFM step-down, 0.8V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AU9	-	XC9261A09DPR-G	DC-DC-IC	PWM/PFM step-down, 0.9V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AUL	-	XC9261A0LDPR-G	DC-DC-IC	PWM/PFM step-down, 0.85V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AUM	-	XC9261A0MDPR-G	DC-DC-IC	PWM/PFM step-down, 0.95V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AV0	-	XC9261A10DPR-G	DC-DC-IC	PWM/PFM step-down, 1.0V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AV1	-	XC9261A11DPR-G	DC-DC-IC	PWM/PFM step-down, 1.1V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AV2	-	XC9261A12DPR-G	DC-DC-IC	PWM/PFM step-down, 1.2V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AV3	-	XC9261A13DPR-G	DC-DC-IC	PWM/PFM step-down, 1.3V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AV4	-	XC9261A14DPR-G	DC-DC-IC	PWM/PFM step-down, 1.4V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AV5	-	XC9261A15DPR-G	DC-DC-IC	PWM/PFM step-down, 1.5V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AV6	-	XC9261A16DPR-G	DC-DC-IC	PWM/PFM step-down, 1.6V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AV7	-	XC9261A17DPR-G	DC-DC-IC	PWM/PFM step-down, 1.7V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AV8	-	XC9261A18DPR-G	DC-DC-IC	PWM/PFM step-down, 1.8V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AV9	-	XC9261A19DPR-G	DC-DC-IC	PWM/PFM step-down, 1.9V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AVA	-	XC9261A1ADPR-G	DC-DC-IC	PWM/PFM step-down, 1.05V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AVB	-	XC9261A1BDPR-G	DC-DC-IC	PWM/PFM step-down, 1.15V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AVC	-	XC9261A1CDPR-G	DC-DC-IC	PWM/PFM step-down, 1.25V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AVD	-	XC9261A1DDPR-G	DC-DC-IC	PWM/PFM step-down, 1.35VV±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AVE	-	XC9261A1EDPR-G	DC-DC-IC	PWM/PFM step-down, 1.45V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AVF	-	XC9261A1FDPR-G	DC-DC-IC	PWM/PFM step-down, 1.55V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AVH	-	XC9261A1HDPR-G	DC-DC-IC	PWM/PFM step-down, 1.65V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AVK	-	XC9261A1KDPR-G	DC-DC-IC	PWM/PFM step-down, 1.75V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AVL	-	XC9261A1LDPR-G	DC-DC-IC	PWM/PFM step-down, 1.85V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AVM	-	XC9261A1MDPR-G	DC-DC-IC	PWM/PFM step-down, 1.95V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AX0	-	XC9261A20DPR-G	DC-DC-IC	PWM/PFM step-down, 2.0V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AX1	-	XC9261A21DPR-G	DC-DC-IC	PWM/PFM step-down, 2.1V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AX2	-	XC9261A22DPR-G	DC-DC-IC	PWM/PFM step-down, 2.2V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AX3	-	XC9261A23DPR-G	DC-DC-IC	PWM/PFM step-down, 2.3V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AX4	-	XC9261A24DPR-G	DC-DC-IC	PWM/PFM step-down, 2.4V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AX5	-	XC9261A25DPR-G	DC-DC-IC	PWM/PFM step-down, 2.5V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AX6	-	XC9261A26DPR-G	DC-DC-IC	PWM/PFM step-down, 2.6V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AX7	-	XC9261A27DPR-G	DC-DC-IC	PWM/PFM step-down, 2.7V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AX8	-	XC9261A28DPR-G	DC-DC-IC	PWM/PFM step-down, 2.8V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AX9	-	XC9261A29DPR-G	DC-DC-IC	PWM/PFM step-down, 2.9V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AXA	-	XC9261A2ADPR-G	DC-DC-IC	PWM/PFM step-down, 2.05V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AXB	-	XC9261A2BDPR-G	DC-DC-IC	PWM/PFM step-down, 2.15V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AXC	-	XC9261A2CDPR-G	DC-DC-IC	PWM/PFM step-down, 2.25V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AXD	-	XC9261A2DDPR-G	DC-DC-IC	PWM/PFM step-down, 2.35V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AXE	-	XC9261A2EDPR-G	DC-DC-IC	PWM/PFM step-down, 2.45V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AXF	-	XC9261A2FDPR-G	DC-DC-IC	PWM/PFM step-down, 2.55V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AXH	-	XC9261A2HDPR-G	DC-DC-IC	PWM/PFM step-down, 2.65V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AXK	-	XC9261A2KDPR-G	DC-DC-IC	PWM/PFM step-down, 2.75V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AXL	-	XC9261A2LDPR-G	DC-DC-IC	PWM/PFM step-down, 2.85V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AXM	-	XC9261A2MDPR-G	DC-DC-IC	PWM/PFM step-down, 2.95V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AY0	-	XC9261A30DPR-G	DC-DC-IC	PWM/PFM step-down, 3.0V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AY1	-	XC9261A31DPR-G	DC-DC-IC	PWM/PFM step-down, 3.1V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AY2	-	XC9261A32DPR-G	DC-DC-IC	PWM/PFM step-down, 3.2V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AY3	-	XC9261A33DPR-G	DC-DC-IC	PWM/PFM step-down, 3.3V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AY4	-	XC9261A34DPR-G	DC-DC-IC	PWM/PFM step-down, 3.4V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AY5	-	XC9261A35DPR-G	DC-DC-IC	PWM/PFM step-down, 3.5V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AY6	-	XC9261A36DPR-G	DC-DC-IC	PWM/PFM step-down, 3.6V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AYA	-	XC9261A3ADPR-G	DC-DC-IC	PWM/PFM step-down, 3.05V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AYB	-	XC9261A3BDPR-G	DC-DC-IC	PWM/PFM step-down, 3.15V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AYC	-	XC9261A3CDPR-G	DC-DC-IC	PWM/PFM step-down, 3.25V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AYD	-	XC9261A3DDPR-G	DC-DC-IC	PWM/PFM step-down, 3.35V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AYE	-	XC9261A3EDPR-G	DC-DC-IC	PWM/PFM step-down, 3.45V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
AYF	-	XC9261A3FDPR-G	DC-DC-IC	PWM/PFM step-down, 3.55V±2%, 1.5A, 3.0MHz, +CE	SOT-89-5	32zq	DC1	6n	Tor
B018	-	R1516H018B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B019	-	R1516H019B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B020	-	R1516H020B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B021	-	R1516H021B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B022	-	R1516H022B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B023	-	R1516H023B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B024	-	R1516H024B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B025	-	R1516H025B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B026	-	R1516H026B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B027	-	R1516H027B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B028	-	R1516H028B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B029	-	R1516H029B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B030	-	R1516H030B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B031	-	R1516H031B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B032	-	R1516H032B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B033	-	R1516H033B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B034	-	R1516H034B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B035	-	R1516H035B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B036	-	R1516H036B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B037	-	R1516H037B	LVR-IC	LDO, 3.7V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B038	-	R1516H038B	LVR-IC	LDO, 3.8V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B039	-	R1516H039B	LVR-IC	LDO, 3.9V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B040	-	R1516H040B	LVR-IC	LDO, 4.0V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B041	-	R1516H041B	LVR-IC	LDO, 4.1V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B042	-	R1516H042B	LVR-IC	LDO, 4.2V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B043	-	R1516H043B	LVR-IC	LDO, 4.3V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B044	-	R1516H044B	LVR-IC	LDO, 4.4V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B045	-	R1516H045B	LVR-IC	LDO, 4.5V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B046	-	R1516H046B	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B047	-	R1516H047B	LVR-IC	LDO, 4.7V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B048	-	R1516H048B	LVR-IC	LDO, 4.8V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B049	-	R1516H049B	LVR-IC	LDO, 4.9V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B050	-	R1516H050B	LVR-IC	LDO, 5.0V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B051	-	R1516H051B	LVR-IC	LDO, 5.1V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B052	-	R1516H052B	LVR-IC	LDO, 5.2V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B053	-	R1516H053B	LVR-IC	LDO, 5.3V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B054	-	R1516H054B	LVR-IC	LDO, 5.4V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B055	-	R1516H055B	LVR-IC	LDO, 5.5V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B056	-	R1516H056B	LVR-IC	LDO, 5.6V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B057	-	R1516H057B	LVR-IC	LDO, 5.7V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B058	-	R1516H058B	LVR-IC	LDO, 5.8V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B059	-	R1516H059B	LVR-IC	LDO, 5.9V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B060	-	R1516H060B	LVR-IC	LDO, 6.0V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B061	-	R1516H061B	LVR-IC	LDO, 6.1V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
B062	-	R1516H062B	LVR-IC	LDO, 6.2V±1%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
BA8	-	XC9260B08CPR-G	DC-DC-IC	PWM step-down, 0.8V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BA9	-	XC9260B09CPR-G	DC-DC-IC	PWM step-down, 0.9V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BAL	-	XC9260B0LCPR-G	DC-DC-IC	PWM step-down, 0.85V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BAM	-	XC9260B0MCPR-G	DC-DC-IC	PWM step-down, 0.95V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BB0	-	XC9260B10CPR-G	DC-DC-IC	PWM step-down, 1.0V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BB1	-	XC9260B11CPR-G	DC-DC-IC	PWM step-down, 1.1V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BB2	-	XC9260B12CPR-G	DC-DC-IC	PWM step-down, 1.2V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BB3	-	XC9260B13CPR-G	DC-DC-IC	PWM step-down, 1.3V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BB4	-	XC9260B14CPR-G	DC-DC-IC	PWM step-down, 1.4V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BB5	-	XC9260B15CPR-G	DC-DC-IC	PWM step-down, 1.5V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BB6	-	XC9260B16CPR-G	DC-DC-IC	PWM step-down, 1.6V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BB7	-	XC9260B17CPR-G	DC-DC-IC	PWM step-down, 1.7V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BB8	-	XC9260B18CPR-G	DC-DC-IC	PWM step-down, 1.8V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BB9	-	XC9260B19CPR-G	DC-DC-IC	PWM step-down, 1.9V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BBA	-	XC9260B1ACPR-G	DC-DC-IC	PWM step-down, 1.05V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BBB	-	XC9260B1BCPR-G	DC-DC-IC	PWM step-down, 1.15V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BBC	-	XC9260B1CCPR-G	DC-DC-IC	PWM step-down, 1.25V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BBD	-	XC9260B1DCPR-G	DC-DC-IC	PWM step-down, 1.35VV±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BBE	-	XC9260B1ECPR-G	DC-DC-IC	PWM step-down, 1.45V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BBF	-	XC9260B1FCPR-G	DC-DC-IC	PWM step-down, 1.55V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BBH	-	XC9260B1HCPR-G	DC-DC-IC	PWM step-down, 1.65V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BBK	-	XC9260B1KCPR-G	DC-DC-IC	PWM step-down, 1.75V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BBL	-	XC9260B1LCPR-G	DC-DC-IC	PWM step-down, 1.85V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BBM	-	XC9260B1MCPR-G	DC-DC-IC	PWM step-down, 1.95V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BC0	-	XC9260B20CPR-G	DC-DC-IC	PWM step-down, 2.0V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BC1	-	XC9260B21CPR-G	DC-DC-IC	PWM step-down, 2.1V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BC2	-	XC9260B22CPR-G	DC-DC-IC	PWM step-down, 2.2V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BC3	-	XC9260B23CPR-G	DC-DC-IC	PWM step-down, 2.3V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BC4	-	XC9260B24CPR-G	DC-DC-IC	PWM step-down, 2.4V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BC5	-	XC9260B25CPR-G	DC-DC-IC	PWM step-down, 2.5V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BC6	-	XC9260B26CPR-G	DC-DC-IC	PWM step-down, 2.6V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BC7	-	XC9260B27CPR-G	DC-DC-IC	PWM step-down, 2.7V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BC8	-	XC9260B28CPR-G	DC-DC-IC	PWM step-down, 2.8V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BC9	-	XC9260B29CPR-G	DC-DC-IC	PWM step-down, 2.9V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BCA	-	XC9260B2ACPR-G	DC-DC-IC	PWM step-down, 2.05V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BCB	-	XC9260B2BCPR-G	DC-DC-IC	PWM step-down, 2.15V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BCC	-	XC9260B2CCPR-G	DC-DC-IC	PWM step-down, 2.25V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BCD	-	XC9260B2DCPR-G	DC-DC-IC	PWM step-down, 2.35V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BCE	-	XC9260B2ECPR-G	DC-DC-IC	PWM step-down, 2.45V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BCF	-	XC9260B2FCPR-G	DC-DC-IC	PWM step-down, 2.55V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BCH	-	XC9260B2HCPR-G	DC-DC-IC	PWM step-down, 2.65V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BCK	-	S-814A20AUC-BCKT2	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BCK	-	XC9260B2KCPR-G	DC-DC-IC	PWM step-down, 2.75V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BCL	-	S-814A21AUC-BCLT2	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BCL	-	XC9260B2LCPR-G	DC-DC-IC	PWM step-down, 2.85V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BCM	-	S-814A22AUC-BCMT2	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BCM	-	XC9260B2MCPR-G	DC-DC-IC	PWM step-down, 2.95V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BCN	-	S-814A23AUC-BCNT2	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BCO	-	S-814A24AUC-BCOT2	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BCP	-	S-814A25AUC-BCPT2	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BCQ	-	S-814A26AUC-BCQT2	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BCR	-	S-814A27AUC-BCRT2	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BCS	-	S-814A28AUC-BCST2	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BCT	-	S-814A29AUC-BCTT2	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BCU	-	S-814A30AUC-BCUT2	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BCV	-	S-814A31AUC-BCVT2	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BCW	-	S-814A32AUC-BCWT2	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BCX	-	S-814A33AUC-BCXT2	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BCY	-	S-814A34AUC-BCYT2	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BCZ	-	S-814A35AUC-BCZT2	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BD0	-	XC9260B30CPR-G	DC-DC-IC	PWM step-down, 3.0V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BD1	-	XC9260B31CPR-G	DC-DC-IC	PWM step-down, 3.1V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BD2	-	XC9260B32CPR-G	DC-DC-IC	PWM step-down, 3.2V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BD3	-	XC9260B33CPR-G	DC-DC-IC	PWM step-down, 3.3V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BD4	-	XC9260B34CPR-G	DC-DC-IC	PWM step-down, 3.4V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BD5	-	XC9260B35CPR-G	DC-DC-IC	PWM step-down, 3.5V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BD6	-	XC9260B36CPR-G	DC-DC-IC	PWM step-down, 3.6V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BDA	-	S-814A36AUC-BDAT2	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDA	-	XC9260B3ACPR-G	DC-DC-IC	PWM step-down, 3.05V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BDB	-	S-814A37AUC-BDBT2	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDB	-	XC9260B3BCPR-G	DC-DC-IC	PWM step-down, 3.15V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BDC	-	S-814A38AUC-BDCT2	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDC	-	XC9260B3CCPR-G	DC-DC-IC	PWM step-down, 3.25V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BDD	-	S-814A39AUC-BDDT2	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDD	-	XC9260B3DCPR-G	DC-DC-IC	PWM step-down, 3.35V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BDE	-	S-814A40AUC-BDET2	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDE	-	XC9260B3ECPR-G	DC-DC-IC	PWM step-down, 3.45V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BDF	-	S-814A41AUC-BDFT2	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDF	-	XC9260B3FCPR-G	DC-DC-IC	PWM step-down, 3.55V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BDG	-	S-814A42AUC-BDGT2	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDH	-	S-814A43AUC-BDHT2	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDI	-	S-814A44AUC-BDIT2	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDJ	-	S-814A45AUC-BDJT2	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDK	-	S-814A46AUC-BDKT2	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDL	-	S-814A47AUC-BDLT2	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDM	-	S-814A48AUC-BDMT2	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDN	-	S-814A49AUC-BDNT2	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDO	-	S-814A50AUC-BDOT2	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDP	-	S-814A51AUC-BDPT2	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDQ	-	S-814A52AUC-BDQT2	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDR	-	S-814A53AUC-BDRT2	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDS	-	S-814A54AUC-BDST2	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDT	-	S-814A55AUC-BDTT2	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDU	-	S-814A56AUC-BDUT2	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDV	-	S-814A57AUC-BDVT2	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDW	-	S-814A58AUC-BDWT2	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDX	-	S-814A59AUC-BDXT2	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BDY	-	S-814A60AUC-BDYT2	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BE8	-	XC9260B08DPR-G	DC-DC-IC	PWM step-down, 0.8V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BE9	-	XC9260B09DPR-G	DC-DC-IC	PWM step-down, 0.9V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BEL	-	XC9260B0LDPR-G	DC-DC-IC	PWM step-down, 0.85V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BEM	-	XC9260B0MDPR-G	DC-DC-IC	PWM step-down, 0.95V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BF0	-	XC9260B10DPR-G	DC-DC-IC	PWM step-down, 1.0V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BF1	-	XC9260B11DPR-G	DC-DC-IC	PWM step-down, 1.1V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BF2	-	XC9260B12DPR-G	DC-DC-IC	PWM step-down, 1.2V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BF3	-	XC9260B13DPR-G	DC-DC-IC	PWM step-down, 1.3V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BF4	-	XC9260B14DPR-G	DC-DC-IC	PWM step-down, 1.4V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BF5	-	XC9260B15DPR-G	DC-DC-IC	PWM step-down, 1.5V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BF6	-	XC9260B16DPR-G	DC-DC-IC	PWM step-down, 1.6V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BF7	-	XC9260B17DPR-G	DC-DC-IC	PWM step-down, 1.7V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BF8	-	XC9260B18DPR-G	DC-DC-IC	PWM step-down, 1.8V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BF9	-	XC9260B19DPR-G	DC-DC-IC	PWM step-down, 1.9V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BFA	-	XC9260B1ADPR-G	DC-DC-IC	PWM step-down, 1.05V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BFB	-	XC9260B1BDPR-G	DC-DC-IC	PWM step-down, 1.15V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BFC	-	XC9260B1CDPR-G	DC-DC-IC	PWM step-down, 1.25V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BFD	-	XC9260B1DDPR-G	DC-DC-IC	PWM step-down, 1.35VV±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BFE	-	XC9260B1EDPR-G	DC-DC-IC	PWM step-down, 1.45V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BFF	-	XC9260B1FDPR-G	DC-DC-IC	PWM step-down, 1.55V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BFH	-	XC9260B1HDPR-G	DC-DC-IC	PWM step-down, 1.65V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BFK	-	XC9260B1KDPR-G	DC-DC-IC	PWM step-down, 1.75V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BFL	-	XC9260B1LDPR-G	DC-DC-IC	PWM step-down, 1.85V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BFM	-	XC9260B1MDPR-G	DC-DC-IC	PWM step-down, 1.95V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BGA	-	S-818A20AUC-BGAT2	LVR-IC	LDO, 2.0V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGB	-	S-818A21AUC-BGBT2	LVR-IC	LDO, 2.1V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGC	-	S-818A22AUC-BGCT2	LVR-IC	LDO, 2.2V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGD	-	S-818A23AUC-BGDT2	LVR-IC	LDO, 2.3V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGE	-	S-818A24AUC-BGET2	LVR-IC	LDO, 2.4V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGF	-	S-818A25AUC-BGFT2	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGG	-	S-818A26AUC-BGGT2	LVR-IC	LDO, 2.6V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGH	-	S-818A27AUC-BGHT2	LVR-IC	LDO, 2.7V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGI	-	S-818A28AUC-BGIT2	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BGJ	-	S-818A29AUC-BGJT2	LVR-IC	LDO, 2.9V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGK	-	S-818A30AUC-BGKT2	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGL	-	S-818A31AUC-BGLT2	LVR-IC	LDO, 3.1V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGM	-	S-818A32AUC-BGMT2	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGN	-	S-818A33AUC-BGNT2	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGO	-	S-818A34AUC-BGOT2	LVR-IC	LDO, 3.4V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGP	-	S-818A35AUC-BGPT2	LVR-IC	LDO, 3.5V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGQ	-	S-818A36AUC-BGQT2	LVR-IC	LDO, 3.6V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGR	-	S-818A37AUC-BGRT2	LVR-IC	LDO, 3.7V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGS	-	S-818A38AUC-BGST2	LVR-IC	LDO, 3.8V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGT	-	S-818A39AUC-BGTT2	LVR-IC	LDO, 3.9V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGU	-	S-818A40AUC-BGUT2	LVR-IC	LDO, 4.0V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGV	-	S-818A41AUC-BGVT2	LVR-IC	LDO, 4.1V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGW	-	S-818A42AUC-BGWT2	LVR-IC	LDO, 4.2V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGX	-	S-818A43AUC-BGXT2	LVR-IC	LDO, 4.3V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGY	-	S-818A44AUC-BGYT2	LVR-IC	LDO, 4.4V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BGZ	-	S-818A45AUC-BGZT2	LVR-IC	LDO, 4.5V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BHA	-	S-818A46AUC-BHAT2	LVR-IC	LDO, 4.6V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BHB	-	S-818A47AUC-BHBT2	LVR-IC	LDO, 4.7V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BHC	-	S-818A48AUC-BHCT2	LVR-IC	LDO, 4.8V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BHD	-	S-818A49AUC-BHDT2	LVR-IC	LDO, 4.9V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BHE	-	S-818A50AUC-BHET2	LVR-IC	LDO, 5.0V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BHF	-	S-818A51AUC-BHFT2	LVR-IC	LDO, 5.1V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BHG	-	S-818A52AUC-BHGT2	LVR-IC	LDO, 5.2V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BHH	-	S-818A53AUC-BHHT2	LVR-IC	LDO, 5.3V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BHI	-	S-818A54AUC-BHIT2	LVR-IC	LDO, 5.4V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BHJ	-	S-818A55AUC-BHJT2	LVR-IC	LDO, 5.5V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BHK	-	S-818A56AUC-BHKT2	LVR-IC	LDO, 5.6V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BHL	-	S-818A57AUC-BHLT2	LVR-IC	LDO, 5.7V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BHM	-	S-818A58AUC-BHMT2	LVR-IC	LDO, 5.8V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BHN	-	S-818A59AUC-BHNT2	LVR-IC	LDO, 5.9V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BHO	-	S-818A60AUC-BHOT2	LVR-IC	LDO, 6.0V±2%, 200mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
BL0	-	XC9260B20DPR-G	DC-DC-IC	PWM step-down, 2.0V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BL1	-	XC9260B21DPR-G	DC-DC-IC	PWM step-down, 2.1V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BL2	-	XC9260B22DPR-G	DC-DC-IC	PWM step-down, 2.2V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BL3	-	XC9260B23DPR-G	DC-DC-IC	PWM step-down, 2.3V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BL4	-	XC9260B24DPR-G	DC-DC-IC	PWM step-down, 2.4V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BL5	-	XC9260B25DPR-G	DC-DC-IC	PWM step-down, 2.5V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BL6	-	XC9260B26DPR-G	DC-DC-IC	PWM step-down, 2.6V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BL7	-	XC9260B27DPR-G	DC-DC-IC	PWM step-down, 2.7V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BL8	-	XC9260B28DPR-G	DC-DC-IC	PWM step-down, 2.8V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BL9	-	XC9260B29DPR-G	DC-DC-IC	PWM step-down, 2.9V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BLA	-	XC9260B2ADPR-G	DC-DC-IC	PWM step-down, 2.05V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BLB	-	XC9260B2BDPR-G	DC-DC-IC	PWM step-down, 2.15V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BLC	-	XC9260B2CDPR-G	DC-DC-IC	PWM step-down, 2.25V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BLD	-	XC9260B2DDPR-G	DC-DC-IC	PWM step-down, 2.35V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BLE	-	XC9260B2EDPR-G	DC-DC-IC	PWM step-down, 2.45V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BLF	-	XC9260B2FDPR-G	DC-DC-IC	PWM step-down, 2.55V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BLH	-	XC9260B2HDPR-G	DC-DC-IC	PWM step-down, 2.65V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BLK	-	XC9260B2KDPR-G	DC-DC-IC	PWM step-down, 2.75V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BLL	-	XC9260B2LDPR-G	DC-DC-IC	PWM step-down, 2.85V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BLM	-	XC9260B2MDPR-G	DC-DC-IC	PWM step-down, 2.95V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BM0	-	XC9260B30DPR-G	DC-DC-IC	PWM step-down, 3.0V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BM1	-	XC9260B31DPR-G	DC-DC-IC	PWM step-down, 3.1V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BM2	-	XC9260B32DPR-G	DC-DC-IC	PWM step-down, 3.2V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BM3	-	XC9260B33DPR-G	DC-DC-IC	PWM step-down, 3.3V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BM4	-	XC9260B34DPR-G	DC-DC-IC	PWM step-down, 3.4V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BM5	-	XC9260B35DPR-G	DC-DC-IC	PWM step-down, 3.5V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BM6	-	XC9260B36DPR-G	DC-DC-IC	PWM step-down, 3.6V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BMA	-	XC9260B3ADPR-G	DC-DC-IC	PWM step-down, 3.05V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BMB	-	XC9260B3BDPR-G	DC-DC-IC	PWM step-down, 3.15V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BMC	-	XC9260B3CDPR-G	DC-DC-IC	PWM step-down, 3.25V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BMD	-	XC9260B3DDPR-G	DC-DC-IC	PWM step-down, 3.35V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BME	-	XC9260B3EDPR-G	DC-DC-IC	PWM step-down, 3.45V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BMF	-	XC9260B3FDPR-G	DC-DC-IC	PWM step-down, 3.55V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BN8	-	XC9261B08CPR-G	DC-DC-IC	PWM/PFM step-down, 0.8V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BN9	-	XC9261B09CPR-G	DC-DC-IC	PWM/PFM step-down, 0.9V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BNL	-	XC9261B0LCPR-G	DC-DC-IC	PWM/PFM step-down, 0.85V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BNM	-	XC9261B0MCPR-G	DC-DC-IC	PWM/PFM step-down, 0.95V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BP0	-	XC9261B10CPR-G	DC-DC-IC	PWM/PFM step-down, 1.0V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BP1	-	XC9261B11CPR-G	DC-DC-IC	PWM/PFM step-down, 1.1V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BP2	-	XC9261B12CPR-G	DC-DC-IC	PWM/PFM step-down, 1.2V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BP3	-	XC9261B13CPR-G	DC-DC-IC	PWM/PFM step-down, 1.3V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BP4	-	XC9261B14CPR-G	DC-DC-IC	PWM/PFM step-down, 1.4V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BP5	-	XC9261B15CPR-G	DC-DC-IC	PWM/PFM step-down, 1.5V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BP6	-	XC9261B16CPR-G	DC-DC-IC	PWM/PFM step-down, 1.6V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BP7	-	XC9261B17CPR-G	DC-DC-IC	PWM/PFM step-down, 1.7V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BP8	-	XC9261B18CPR-G	DC-DC-IC	PWM/PFM step-down, 1.8V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BP9	-	XC9261B19CPR-G	DC-DC-IC	PWM/PFM step-down, 1.9V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BPA	-	XC9261B1ACPR-G	DC-DC-IC	PWM/PFM step-down, 1.05V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BPB	-	XC9261B1BCPR-G	DC-DC-IC	PWM/PFM step-down, 1.15V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BPC	-	XC9261B1CCPR-G	DC-DC-IC	PWM/PFM step-down, 1.25V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BPD	-	XC9261B1DCPR-G	DC-DC-IC	PWM/PFM step-down, 1.35VV±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BPE	-	XC9261B1ECPR-G	DC-DC-IC	PWM/PFM step-down, 1.45V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BPF	-	XC9261B1FCPR-G	DC-DC-IC	PWM/PFM step-down, 1.55V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BPH	-	XC9261B1HCPR-G	DC-DC-IC	PWM/PFM step-down, 1.65V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BPK	-	XC9261B1KCPR-G	DC-DC-IC	PWM/PFM step-down, 1.75V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BPL	-	XC9261B1LCPR-G	DC-DC-IC	PWM/PFM step-down, 1.85V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BPM	-	XC9261B1MCPR-G	DC-DC-IC	PWM/PFM step-down, 1.95V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BR0	-	XC9261B20CPR-G	DC-DC-IC	PWM/PFM step-down, 2.0V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BR1	-	XC9261B21CPR-G	DC-DC-IC	PWM/PFM step-down, 2.1V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BR2	-	XC9261B22CPR-G	DC-DC-IC	PWM/PFM step-down, 2.2V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BR3	-	XC9261B23CPR-G	DC-DC-IC	PWM/PFM step-down, 2.3V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BR4	-	XC9261B24CPR-G	DC-DC-IC	PWM/PFM step-down, 2.4V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BR5	-	XC9261B25CPR-G	DC-DC-IC	PWM/PFM step-down, 2.5V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BR6	-	XC9261B26CPR-G	DC-DC-IC	PWM/PFM step-down, 2.6V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BR7	-	XC9261B27CPR-G	DC-DC-IC	PWM/PFM step-down, 2.7V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BR8	-	XC9261B28CPR-G	DC-DC-IC	PWM/PFM step-down, 2.8V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BR9	-	XC9261B29CPR-G	DC-DC-IC	PWM/PFM step-down, 2.9V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BRA	-	XC9261B2ACPR-G	DC-DC-IC	PWM/PFM step-down, 2.05V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BRB	-	XC9261B2BCPR-G	DC-DC-IC	PWM/PFM step-down, 2.15V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BRC	-	XC9261B2CCPR-G	DC-DC-IC	PWM/PFM step-down, 2.25V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BRD	-	XC9261B2DCPR-G	DC-DC-IC	PWM/PFM step-down, 2.35V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BRE	-	XC9261B2ECPR-G	DC-DC-IC	PWM/PFM step-down, 2.45V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BRF	-	XC9261B2FCPR-G	DC-DC-IC	PWM/PFM step-down, 2.55V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BRH	-	XC9261B2HCPR-G	DC-DC-IC	PWM/PFM step-down, 2.65V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BRK	-	XC9261B2KCPR-G	DC-DC-IC	PWM/PFM step-down, 2.75V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BRL	-	XC9261B2LCPR-G	DC-DC-IC	PWM/PFM step-down, 2.85V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BRM	-	XC9261B2MCPR-G	DC-DC-IC	PWM/PFM step-down, 2.95V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BT0	-	XC9261B30CPR-G	DC-DC-IC	PWM/PFM step-down, 3.0V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BT1	-	XC9261B31CPR-G	DC-DC-IC	PWM/PFM step-down, 3.1V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BT2	-	XC9261B32CPR-G	DC-DC-IC	PWM/PFM step-down, 3.2V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BT3	-	XC9261B33CPR-G	DC-DC-IC	PWM/PFM step-down, 3.3V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BT4	-	XC9261B34CPR-G	DC-DC-IC	PWM/PFM step-down, 3.4V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BT5	-	XC9261B35CPR-G	DC-DC-IC	PWM/PFM step-down, 3.5V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BT6	-	XC9261B36CPR-G	DC-DC-IC	PWM/PFM step-down, 3.6V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BTA	-	XC9261B3ACPR-G	DC-DC-IC	PWM/PFM step-down, 3.05V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BTB	-	XC9261B3BCPR-G	DC-DC-IC	PWM/PFM step-down, 3.15V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BTC	-	XC9261B3CCPR-G	DC-DC-IC	PWM/PFM step-down, 3.25V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BTD	-	XC9261B3DCPR-G	DC-DC-IC	PWM/PFM step-down, 3.35V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BTE	-	XC9261B3ECPR-G	DC-DC-IC	PWM/PFM step-down, 3.45V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BTF	-	XC9261B3FCPR-G	DC-DC-IC	PWM/PFM step-down, 3.55V±2%, 1.5A, 1.2MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BU8	-	XC9261B08DPR-G	DC-DC-IC	PWM/PFM step-down, 0.8V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BU9	-	XC9261B09DPR-G	DC-DC-IC	PWM/PFM step-down, 0.9V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BUL	-	XC9261B0LDPR-G	DC-DC-IC	PWM/PFM step-down, 0.85V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BUM	-	XC9261B0MDPR-G	DC-DC-IC	PWM/PFM step-down, 0.95V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BV0	-	XC9261B10DPR-G	DC-DC-IC	PWM/PFM step-down, 1.0V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BV1	-	XC9261B11DPR-G	DC-DC-IC	PWM/PFM step-down, 1.1V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BV2	-	XC9261B12DPR-G	DC-DC-IC	PWM/PFM step-down, 1.2V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BV3	-	XC9261B13DPR-G	DC-DC-IC	PWM/PFM step-down, 1.3V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BV4	-	XC9261B14DPR-G	DC-DC-IC	PWM/PFM step-down, 1.4V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BV5	-	XC9261B15DPR-G	DC-DC-IC	PWM/PFM step-down, 1.5V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BV6	-	XC9261B16DPR-G	DC-DC-IC	PWM/PFM step-down, 1.6V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BV7	-	XC9261B17DPR-G	DC-DC-IC	PWM/PFM step-down, 1.7V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BV8	-	XC9261B18DPR-G	DC-DC-IC	PWM/PFM step-down, 1.8V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BV9	-	XC9261B19DPR-G	DC-DC-IC	PWM/PFM step-down, 1.9V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BVA	-	XC9261B1ADPR-G	DC-DC-IC	PWM/PFM step-down, 1.05V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BVB	-	XC9261B1BDPR-G	DC-DC-IC	PWM/PFM step-down, 1.15V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BVC	-	XC9261B1CDPR-G	DC-DC-IC	PWM/PFM step-down, 1.25V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BVD	-	XC9261B1DDPR-G	DC-DC-IC	PWM/PFM step-down, 1.35VV±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVE	-	XC9261B1EDPR-G	DC-DC-IC	PWM/PFM step-down, 1.45V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BVF	-	XC9261B1FDPR-G	DC-DC-IC	PWM/PFM step-down, 1.55V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BVH	-	XC9261B1HDPR-G	DC-DC-IC	PWM/PFM step-down, 1.65V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BVK	-	XC9261B1KDPR-G	DC-DC-IC	PWM/PFM step-down, 1.75V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BVL	-	XC9261B1LDPR-G	DC-DC-IC	PWM/PFM step-down, 1.85V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BVM	-	XC9261B1MDPR-G	DC-DC-IC	PWM/PFM step-down, 1.95V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BX0	-	XC9261B20DPR-G	DC-DC-IC	PWM/PFM step-down, 2.0V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BX1	-	XC9261B21DPR-G	DC-DC-IC	PWM/PFM step-down, 2.1V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BX2	-	XC9261B22DPR-G	DC-DC-IC	PWM/PFM step-down, 2.2V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BX3	-	XC9261B23DPR-G	DC-DC-IC	PWM/PFM step-down, 2.3V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BX4	-	XC9261B24DPR-G	DC-DC-IC	PWM/PFM step-down, 2.4V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BX5	-	XC9261B25DPR-G	DC-DC-IC	PWM/PFM step-down, 2.5V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BX6	-	XC9261B26DPR-G	DC-DC-IC	PWM/PFM step-down, 2.6V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BX7	-	XC9261B27DPR-G	DC-DC-IC	PWM/PFM step-down, 2.7V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BX8	-	XC9261B28DPR-G	DC-DC-IC	PWM/PFM step-down, 2.8V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BX9	-	XC9261B29DPR-G	DC-DC-IC	PWM/PFM step-down, 2.9V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BXA	-	XC9261B2ADPR-G	DC-DC-IC	PWM/PFM step-down, 2.05V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BXB	-	XC9261B2BDPR-G	DC-DC-IC	PWM/PFM step-down, 2.15V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BXC	-	XC9261B2CDPR-G	DC-DC-IC	PWM/PFM step-down, 2.25V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BXD	-	XC9261B2DDPR-G	DC-DC-IC	PWM/PFM step-down, 2.35V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BXE	-	XC9261B2EDPR-G	DC-DC-IC	PWM/PFM step-down, 2.45V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BXF	-	XC9261B2FDPR-G	DC-DC-IC	PWM/PFM step-down, 2.55V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BXH	-	XC9261B2HDPR-G	DC-DC-IC	PWM/PFM step-down, 2.65V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BXK	-	XC9261B2KDPR-G	DC-DC-IC	PWM/PFM step-down, 2.75V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BXL	-	XC9261B2LDPR-G	DC-DC-IC	PWM/PFM step-down, 2.85V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BXM	-	XC9261B2MDPR-G	DC-DC-IC	PWM/PFM step-down, 2.95V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BY0	-	XC9261B30DPR-G	DC-DC-IC	PWM/PFM step-down, 3.0V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BY1	-	XC9261B31DPR-G	DC-DC-IC	PWM/PFM step-down, 3.1V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BY2	-	XC9261B32DPR-G	DC-DC-IC	PWM/PFM step-down, 3.2V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BY3	-	XC9261B33DPR-G	DC-DC-IC	PWM/PFM step-down, 3.3V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BY4	-	XC9261B34DPR-G	DC-DC-IC	PWM/PFM step-down, 3.4V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BY5	-	XC9261B35DPR-G	DC-DC-IC	PWM/PFM step-down, 3.5V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BY6	-	XC9261B36DPR-G	DC-DC-IC	PWM/PFM step-down, 3.6V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BYA	-	XC9261B3ADPR-G	DC-DC-IC	PWM/PFM step-down, 3.05V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BYB	-	XC9261B3BDPR-G	DC-DC-IC	PWM/PFM step-down, 3.15V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BYC	-	XC9261B3CDPR-G	DC-DC-IC	PWM/PFM step-down, 3.25V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BYD	-	XC9261B3DDPR-G	DC-DC-IC	PWM/PFM step-down, 3.35V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BYE	-	XC9261B3EDPR-G	DC-DC-IC	PWM/PFM step-down, 3.45V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
BYF	-	XC9261B3FDPR-G	DC-DC-IC	PWM/PFM step-down, 3.55V±2%, 1.5A, 3.0MHz, +CE, CL	SOT-89-5	32zq	DC1	6n	Tor
C00B	-	RP132H001B	LVR-IC	LDO, Adj. 0.8..5.5V±1%, 1A, +CE	SOT-89-5	32vri	VR16	6h	Ric
C00D	-	RP132H001D	LVR-IC	LDO, Adj. 0.8..5.5V±1%, 1A, +CE, CL	SOT-89-5	32vri	VR16	6h	Ric
C01B	-	RP132H121B5	LVR-IC	LDO, 1.25V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C01C	-	R1130H001C	LVR-IC	LDO, Adjustable 1.5..5V±2%, 300mA, -CE	SOT-89-5	32vrp	-	6h	Ric
C01D	-	RP132H121D5	LVR-IC	LDO, 1.25V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C02B	-	RP132H181B5	LVR-IC	LDO, 1.85V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C02D	-	RP132H181D5	LVR-IC	LDO, 1.85V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C03B	-	RP132H281B5	LVR-IC	LDO, 2.85V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C03D	-	RP132H281D5	LVR-IC	LDO, 2.85V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C08B	-	RP132H081B	LVR-IC	LDO, 0.8V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C08D	-	RP132H081D	LVR-IC	LDO, 0.8V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C09B	-	RP132H091B	LVR-IC	LDO, 0.9V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C09D	-	RP132H091D	LVR-IC	LDO, 0.9V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C10B	-	RP132H101B	LVR-IC	LDO, 1.0V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C10D	-	RP132H101D	LVR-IC	LDO, 1.0V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C11B	-	RP132H111B	LVR-IC	LDO, 1.1V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C11D	-	RP132H111D	LVR-IC	LDO, 1.1V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C12B	-	RP132H121B	LVR-IC	LDO, 1.2V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C12D	-	RP132H121D	LVR-IC	LDO, 1.2V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C13B	-	RP132H131B	LVR-IC	LDO, 1.3V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C13D	-	RP132H131D	LVR-IC	LDO, 1.3V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C14B	-	RP132H141B	LVR-IC	LDO, 1.4V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C14D	-	RP132H141D	LVR-IC	LDO, 1.4V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C15A	-	R1130H151A	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C15B	-	R1130H151B	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C15B	-	RP132H151B	LVR-IC	LDO, 1.5V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C15D	-	RP132H151D	LVR-IC	LDO, 1.5V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C16A	-	R1130H161A	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C16B	-	R1130H161B	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C16B	-	RP132H161B	LVR-IC	LDO, 1.6V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C16D	-	RP132H161D	LVR-IC	LDO, 1.6V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C17A	-	R1130H171A	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C17B	-	R1130H171B	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C17B	-	RP132H171B	LVR-IC	LDO, 1.7V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C17D	-	RP132H171D	LVR-IC	LDO, 1.7V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C18A	-	R1130H181A	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C18B	-	R1130H181B	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C18B	-	RP132H181B	LVR-IC	LDO, 1.8V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C18D	-	RP132H181D	LVR-IC	LDO, 1.8V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C19A	-	R1130H191A	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C19B	-	R1130H191B	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C19B	-	RP132H191B	LVR-IC	LDO, 1.9V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C19D	-	RP132H191D	LVR-IC	LDO, 1.9V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C20	kb	XC6381C201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C20A	-	R1130H201A	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C20B	-	R1130H201B	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C20B	-	RP132H201B	LVR-IC	LDO, 2.0V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C20D	-	RP132H201D	LVR-IC	LDO, 1.0V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C21	kb	XC6381C211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C21A	-	R1130H211A	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C21B	-	R1130H211B	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C21B	-	RP132H211B	LVR-IC	LDO, 2.1V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C21D	-	RP132H211D	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C22	kb	XC6381C221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C22A	-	R1130H221A	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C22B	-	R1130H221B	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C22B	-	RP132H221B	LVR-IC	LDO, 2.2V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C22D	-	RP132H221D	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C23	kb	XC6381C231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C23A	-	R1130H231A	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C23B	-	R1130H231B	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C23B	-	RP132H231B	LVR-IC	LDO, 2.3V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C23D	-	RP132H231D	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C24	kb	XC6381C241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C24A	-	R1130H241A	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C24B	-	R1130H241B	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C24B	-	RP132H241B	LVR-IC	LDO, 2.4V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C24D	-	RP132H241D	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C25	kb	XC6381C251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C25A	-	R1130H251A	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C25B	-	R1130H251B	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C25B	-	RP132H251B	LVR-IC	LDO, 2.5V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C25D	-	RP132H251D	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C26	kb	XC6381C261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C26A	-	R1130H261A	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C26B	-	R1130H261B	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C26B	-	RP132H261B	LVR-IC	LDO, 2.6V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C26D	-	RP132H261D	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C27	kb	XC6381C271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C27A	-	R1130H271A	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C27B	-	R1130H271B	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C27B	-	RP132H271B	LVR-IC	LDO, 2.7V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C27D	-	RP132H271D	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C28	kb	XC6381C281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C28A	-	R1130H281A	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C28B	-	R1130H281B	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C28B	-	RP132H281B	LVR-IC	LDO, 2.8V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C28D	-	RP132H281D	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C29	kb	XC6381C291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C29A	-	R1130H291A	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C29B	-	R1130H291B	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C29B	-	RP132H291B	LVR-IC	LDO, 2.9V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C29D	-	RP132H291D	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C30	kb	XC6381C301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C30A	-	R1130H301A	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C30B	-	R1130H301B	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C30B	-	RP132H301B	LVR-IC	LDO, 3.0V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C30D	-	RP132H301D	LVR-IC	LDO, 3.0V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C31	kb	XC6381C311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C31A	-	R1130H311A	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C31B	-	R1130H311B	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C31B	-	RP132H311B	LVR-IC	LDO, 3.1V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C31D	-	RP132H311D	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C32	kb	XC6381C321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C32A	-	R1130H321A	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C32B	-	R1130H321B	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C32B	-	RP132H321B	LVR-IC	LDO, 3.2V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C32D	-	RP132H321D	LVR-IC	LDO, 3.2V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C33	kb	XC6381C331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C33A	-	R1130H331A	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C33B	-	R1130H331B	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C33B	-	RP132H331B	LVR-IC	LDO, 3.3V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C33D	-	RP132H331D	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C34	kb	XC6381C341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C34A	-	R1130H341A	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C34B	-	R1130H341B	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C34B	-	RP132H341B	LVR-IC	LDO, 3.4V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C34D	-	RP132H341D	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C35	kb	XC6381C351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C35A	-	R1130H351A	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C35B	-	R1130H351B	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C35B	-	RP132H351B	LVR-IC	LDO, 3.5V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C35D	-	RP132H351D	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C36	kb	XC6381C361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C36A	-	R1130H361A	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C36B	-	R1130H361B	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C36B	-	RP132H361B	LVR-IC	LDO, 3.6V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C36D	-	RP132H361D	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C37	kb	XC6381C371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C37A	-	R1130H371A	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C37B	-	R1130H371B	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C37B	-	RP132H371B	LVR-IC	LDO, 3.7V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C37D	-	RP132H371D	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C38	kb	XC6381C381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C38A	-	R1130H381A	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C38B	-	R1130H381B	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C38B	-	RP132H381B	LVR-IC	LDO, 3.8V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C38D	-	RP132H381D	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C39	kb	XC6381C391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C39A	-	R1130H391A	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C39B	-	R1130H391B	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C39B	-	RP132H391B	LVR-IC	LDO, 3.9V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C39D	-	RP132H391D	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C40	kb	XC6381C401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C40A	-	R1130H401A	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C40B	-	R1130H401B	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C40B	-	RP132H401B	LVR-IC	LDO, 4.0V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C40D	-	RP132H401D	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C41	kb	XC6381C411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C41A	-	R1130H411A	LVR-IC	LDO, 4.1V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C41B	-	R1130H411B	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C41B	-	RP132H411B	LVR-IC	LDO, 4.1V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C41D	-	RP132H411D	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C42	kb	XC6381C421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C42A	-	R1130H421A	LVR-IC	LDO, 4.2V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C42B	-	R1130H421B	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C42B	-	RP132H421B	LVR-IC	LDO, 4.2V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C42D	-	RP132H421D	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C43	kb	XC6381C431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C43A	-	R1130H431A	LVR-IC	LDO, 4.3V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C43B	-	R1130H431B	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C43B	-	RP132H431B	LVR-IC	LDO, 4.3V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C43D	-	RP132H431D	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C44	kb	XC6381C441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C44A	-	R1130H441A	LVR-IC	LDO, 4.4V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C44B	-	R1130H441B	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C44B	-	RP132H441B	LVR-IC	LDO, 4.4V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C44D	-	RP132H441D	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C45	kb	XC6381C451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C45A	-	R1130H451A	LVR-IC	LDO, 4.5V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C45B	-	R1130H451B	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C45B	-	RP132H451B	LVR-IC	LDO, 4.5V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C45D	-	RP132H451D	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C46	kb	XC6381C461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C46A	-	R1130H461A	LVR-IC	LDO, 4.6V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C46B	-	R1130H461B	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C46B	-	RP132H461B	LVR-IC	LDO, 4.6V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C46D	-	RP132H461D	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C47	kb	XC6381C471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C47A	-	R1130H471A	LVR-IC	LDO, 4.7V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C47B	-	R1130H471B	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C47B	-	RP132H471B	LVR-IC	LDO, 4.7V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C47D	-	RP132H471D	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C48	kb	XC6381C481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C48A	-	R1130H481A	LVR-IC	LDO, 4.8V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C48B	-	R1130H481B	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C48B	-	RP132H481B	LVR-IC	LDO, 4.8V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C48D	-	RP132H481D	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C49	kb	XC6381C491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C49A	-	R1130H491A	LVR-IC	LDO, 4.9V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C49B	-	R1130H491B	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C49B	-	RP132H491B	LVR-IC	LDO, 4.9V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C49D	-	RP132H491D	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C4N	-	S-812C33BUC-C4NT2G	LVR-IC	3.3V±2%, 50mA, +CE	SOT-89-5	32rz	VR4	6s	Sii
C50	kb	XC6381C501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C50A	-	R1130H501A	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	SOT-89-5	32vz	VR4	6h	Ric
C50B	-	R1130H501B	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-89-5	32vz	VR4	6h	Ric
C50B	-	RP132H501B	LVR-IC	LDO, 5.0V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C50D	-	RP132H501D	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C51	kb	XC6381C511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C51B	-	RP132H511B	LVR-IC	LDO, 5.1V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C51D	-	RP132H511D	LVR-IC	LDO, 5.1V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C52	kb	XC6381C521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C52B	-	RP132H521B	LVR-IC	LDO, 5.2V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C52D	-	RP132H521D	LVR-IC	LDO, 5.2V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C53	kb	XC6381C531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C53B	-	RP132H531B	LVR-IC	LDO, 5.3V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C53D	-	RP132H531D	LVR-IC	LDO, 5.3V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C54	kb	XC6381C541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C54B	-	RP132H541B	LVR-IC	LDO, 5.4V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C54D	-	RP132H541D	LVR-IC	LDO, 5.4V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C55	kb	XC6381C551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C55B	-	RP132H551B	LVR-IC	LDO, 5.5V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
C55D	-	RP132H551D	LVR-IC	LDO, 5.5V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
C56	kb	XC6381C561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C57	kb	XC6381C571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C58	kb	XC6381C581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C59	kb	XC6381C591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C5E	-	S-812C50BUC-C5ET2G	LVR-IC	5.0V±2%, 50mA, +CE	SOT-89-5	32rz	VR4	6s	Sii
C60	kb	XC6381C601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C61	kb	XC6381C611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C62	kb	XC6381C621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C63	kb	XC6381C631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C64	kb	XC6381C641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C65	kb	XC6381C651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C66	kb	XC6381C661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C67	kb	XC6381C671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C68	kb	XC6381C681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C69	kb	XC6381C691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
C70	kb	XC6381C701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 155kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
CB-	-	XC62GR2112P	LVR-IC	2.1V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
CB-	ka	XC62GP2112P	LVR-IC	2.1V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
CB+	-	XC62GR2122P	LVR-IC	2.1V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
CB+	ka	XC62GP2122P	LVR-IC	2.1V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
CC-	-	XC62GR2212P	LVR-IC	2.2V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
CC-	ka	XC62GP2212P	LVR-IC	2.2V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
CC+	-	XC62GR2222P	LVR-IC	2.2V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
CC+	ka	XC62GP2222P	LVR-IC	2.2V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
CD-	-	XC62GR2312P	LVR-IC	2.3V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
CD-	ka	XC62GP2312P	LVR-IC	2.3V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
CD+	-	XC62GR2322P	LVR-IC	2.3V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CD+	ka	XC62GP2322P	LVR-IC	2.3V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
CE-	-	XC62GR2412P	LVR-IC	2.4V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
CE-	ka	XC62GP2412P	LVR-IC	2.4V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
CE+	-	XC62GR2422P	LVR-IC	2.4V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
CE+	ka	XC62GP2422P	LVR-IC	2.4V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
CF-	-	XC62GR2512P	LVR-IC	2.5V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
CF-	ka	XC62GP2512P	LVR-IC	2.5V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
CF+	-	XC62GR2522P	LVR-IC	2.5V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
CF+	ka	XC62GP2522P	LVR-IC	2.5V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
CH-	-	XC62GR2612P	LVR-IC	2.6V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
CH-	ka	XC62GP2612P	LVR-IC	2.6V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
CH+	-	XC62GR2622P	LVR-IC	2.6V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
CH+	ka	XC62GP2622P	LVR-IC	2.6V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
CK-	-	XC62GR2712P	LVR-IC	2.7V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
CK-	ka	XC62GP2712P	LVR-IC	2.7V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
CK+	-	XC62GR2722P	LVR-IC	2.7V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
CK+	ka	XC62GP2722P	LVR-IC	2.7V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
CL-	-	XC62GR2812P	LVR-IC	2.8V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
CL-	ka	XC62GP2812P	LVR-IC	2.8V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
CL+	-	XC62GR2822P	LVR-IC	2.8V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
CL+	ka	XC62GP2822P	LVR-IC	2.8V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
CM-	-	XC62GR2912P	LVR-IC	2.9V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
CM-	ka	XC62GP2912P	LVR-IC	2.9V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
CM+	-	XC62GR2922P	LVR-IC	2.9V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
CM+	ka	XC62GP2922P	LVR-IC	2.9V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
D0	-	AP131-41Y	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
D0	-	ELM89202A	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
D00F	-	RP115H071B5	LVR-IC	LDO, 0.75V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D00G	-	RP115H071D5	LVR-IC	LDO, 0.75V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D01F	-	RP115H121B5	LVR-IC	LDO, 1.25V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D01G	-	RP115H121D5	LVR-IC	LDO, 1.25V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D02A	-	R1150H002A	LVR/Vdet-IC	LDO, 3.3V±2%, 150mA, Vdet=2.5V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D02B	-	R1150H002B	LVR/Vdet-IC	LDO, 3.3V±2%, 150mA, Vdet=2.5V, -Reset ODO	SOT-89-5	32yb	VR14	6h	Ric
D02D	-	R1150H002D	LVR/Vdet-IC	LDO, 3.3V±2%, 150mA, Vdet=2.5V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D02F	-	RP115H181B5	LVR-IC	LDO, 1.85V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D02G	-	RP115H181D5	LVR-IC	LDO, 1.85V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D03A	-	R1150H003A	LVR/Vdet-IC	LDO, 5.0V±2%, 150mA, Vdet=4.3V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D03B	-	R1150H003B	LVR/Vdet-IC	LDO, 5.0V±2%, 150mA, Vdet=4.3V, -Reset ODO	SOT-89-5	32yb	VR14	6h	Ric
D03F	-	RP115H281B5	LVR-IC	LDO, 2.85V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D03G	-	RP115H281D5	LVR-IC	LDO, 2.85V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D04B	-	R1150H004B	LVR/Vdet-IC	LDO, 2.5V±2%, 150mA, Vdet=2.3V, -Reset ODO	SOT-89-5	32yb	VR14	6h	Ric
D04F	-	RP115H131B5	LVR-IC	LDO, 1.35V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D04G	-	RP115H131D5	LVR-IC	LDO, 1.35V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D05B	-	R1150H005B	LVR/Vdet-IC	LDO, 3.3V±2%, 150mA, Vdet=2.9V, -Reset ODO	SOT-89-5	32yb	VR14	6h	Ric
D05F	-	RP115H111B5	LVR-IC	LDO, 1.15V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D05G	-	RP115H111D5	LVR-IC	LDO, 1.15V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D06A	-	R1150H006A	LVR/Vdet-IC	LDO, 5.0V±2%, 150mA, Vdet=4.5V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D06B	-	R1150H006B	LVR/Vdet-IC	LDO, 5.0V±2%, 150mA, Vdet=4.5V, -Reset ODO	SOT-89-5	32yb	VR14	6h	Ric
D07C	-	R1150H007C	LVR/Vdet-IC	LDO, 3.5V±2%, 150mA, Vdet=3.1V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D07F	-	RP115H071B	LVR-IC	LDO, 0.7V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D07G	-	RP115H071D	LVR-IC	LDO, 0.7V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D08C	-	R1150H008C	LVR/Vdet-IC	LDO, 3.3V±2%, 150mA, Vdet=4.2V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D08F	-	RP115H081B	LVR-IC	LDO, 0.8V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D08G	-	RP115H081D	LVR-IC	LDO, 0.8V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D09C	-	R1150H009C	LVR/Vdet-IC	LDO, 5.0V±2%, 150mA, Vdet=4.1V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D09F	-	RP115H091B	LVR-IC	LDO, 0.9V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D09G	-	RP115H091D	LVR-IC	LDO, 0.9V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D1	-	AP131-42Y	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
D1	-	ELM89212A	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
D10A	-	R1150H010A	LVR/Vdet-IC	LDO, 3.0V±2%, 150mA, Vdet=4.2V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D10F	-	RP115H101B	LVR-IC	LDO, 1.0V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D10G	-	RP115H101D	LVR-IC	LDO, 1.0V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D11A	-	R1150H011A	LVR/Vdet-IC	LDO, 7.0V±2%, 150mA, Vdet=2.8V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D11F	-	RP115H111B	LVR-IC	LDO, 1.1V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D11G	-	RP115H111D	LVR-IC	LDO, 1.1V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D12A	-	R1150H012A	LVR/Vdet-IC	LDO, 12.0V±2%, 150mA, Vdet=4.7V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D12F	-	RP115H121B	LVR-IC	LDO, 1.2V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D12G	-	RP115H121D	LVR-IC	LDO, 1.2V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D13A	-	R1150H013A	LVR/Vdet-IC	LDO, 7.5V±2%, 150mA, Vdet=4.3V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D13F	-	RP115H131B	LVR-IC	LDO, 1.3V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D13G	-	RP115H131D	LVR-IC	LDO, 1.3V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D14A	-	R1150H014A	LVR/Vdet-IC	LDO, 7.5V±2%, 150mA, Vdet=4.7V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D14F	-	RP115H141B	LVR-IC	LDO, 1.4V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D14G	-	RP115H141D	LVR-IC	LDO, 1.4V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D15A	-	R1150H015A	LVR/Vdet-IC	LDO, 3.0V±2%, 150mA, Vdet=2.5V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D15F	-	RP115H151B	LVR-IC	LDO, 1.5V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D15G	-	RP115H151D	LVR-IC	LDO, 1.5V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D16D	-	R1150H016D	LVR/Vdet-IC	LDO, 5.0V±2%, 150mA, Vdet=3.5V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D16F	-	RP115H161B	LVR-IC	LDO, 1.6V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D16G	-	RP115H161D	LVR-IC	LDO, 1.6V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D17D	-	R1150H017D	LVR/Vdet-IC	LDO, 3.3V±2%, 150mA, Vdet=2.9V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D17F	-	RP115H171B	LVR-IC	LDO, 1.7V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D17G	-	RP115H171D	LVR-IC	LDO, 1.7V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D18D	-	R1150H018D	LVR/Vdet-IC	LDO, 5.0V±2%, 150mA, Vdet=3.0V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D18F	-	RP115H181B	LVR-IC	LDO, 1.8V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D18G	-	RP115H181D	LVR-IC	LDO, 1.8V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D19A	-	R1150H019A	LVR/Vdet-IC	LDO, 14.0V±2%, 150mA, Vdet=15.0V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D19F	-	RP115H191B	LVR-IC	LDO, 1.9V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D19G	-	RP115H191D	LVR-IC	LDO, 1.9V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D2	-	AP131-43Y	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
D2	-	ELM89222A	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
D20C	-	R1150H020C	LVR/Vdet-IC	LDO, 5.0V±2%, 150mA, Vdet=4.2V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D20D	-	R1150H020D	LVR/Vdet-IC	LDO, 5.0V±2%, 150mA, Vdet=4.2V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D20F	-	RP115H201B	LVR-IC	LDO, 2.0V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D20G	-	RP115H201D	LVR-IC	LDO, 2.0V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D21A	-	R1150H021A	LVR/Vdet-IC	LDO, 3.6V±2%, 150mA, Vdet=4.3V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D21B	-	R1150H021B	LVR/Vdet-IC	LDO, 3.6V±2%, 150mA, Vdet=4.3V, -Reset ODO	SOT-89-5	32yb	VR14	6h	Ric
D21F	-	RP115H211B	LVR-IC	LDO, 2.1V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D21G	-	RP115H211D	LVR-IC	LDO, 2.1V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D22D	-	R1150H022D	LVR/Vdet-IC	LDO, 3.3V±2%, 150mA, Vdet=2.8V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D22F	-	RP115H221B	LVR-IC	LDO, 2.2V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D22G	-	RP115H221D	LVR-IC	LDO, 2.2V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D23A	-	R1150H023A	LVR/Vdet-IC	LDO, 12.0V±2%, 150mA, Vdet=4.2V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D23F	-	RP115H231B	LVR-IC	LDO, 2.3V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D23G	-	RP115H231D	LVR-IC	LDO, 2.3V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D24B	-	R1150H024B	LVR/Vdet-IC	LDO, 3.3V±2%, 150mA, Vdet=3.6V, -Reset ODO	SOT-89-5	32yb	VR14	6h	Ric
D24F	-	RP115H241B	LVR-IC	LDO, 2.4V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D24G	-	RP115H241D	LVR-IC	LDO, 2.4V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D25B	-	R1150H025B	LVR/Vdet-IC	LDO, 4.0V±2%, 150mA, Vdet=5.0V, -Reset ODO	SOT-89-5	32yb	VR14	6h	Ric
D25F	-	RP115H251B	LVR-IC	LDO, 2.5V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D25G	-	RP115H251D	LVR-IC	LDO, 2.5V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D26D	-	R1150H026D	LVR/Vdet-IC	LDO, 3.3V±2%, 150mA, Vdet=2.3V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D26F	-	RP115H261B	LVR-IC	LDO, 2.6V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D26G	-	RP115H261D	LVR-IC	LDO, 2.6V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D27A	-	R1150H027A	LVR/Vdet-IC	LDO, 3.6V±2%, 150mA, Vdet=9.0V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D27F	-	RP115H271B	LVR-IC	LDO, 2.7V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D27G	-	RP115H271D	LVR-IC	LDO, 2.7V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D28D	-	R1150H028D	LVR/Vdet-IC	LDO, 5.0V±2%, 150mA, Vdet=2.1V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D28F	-	RP115H281B	LVR-IC	LDO, 2.8V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D28G	-	RP115H281D	LVR-IC	LDO, 2.8V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D29A	-	R1150H029A	LVR/Vdet-IC	LDO, 3.6V±2%, 150mA, Vdet=7.8V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D29F	-	RP115H291B	LVR-IC	LDO, 2.9V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D29G	-	RP115H291D	LVR-IC	LDO, 2.9V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D3	-	AP131-44Y	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
D3	-	ELM89232A	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
D30D	-	R1150H030D	LVR/Vdet-IC	LDO, 3.3V±2%, 150mA, Vdet=2.2V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D30F	-	RP115H301B	LVR-IC	LDO, 3.0V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D30G	-	RP115H301D	LVR-IC	LDO, 3.0V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D31D	-	R1150H031D	LVR/Vdet-IC	LDO, 3.3V±2%, 150mA, Vdet=2.0V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D31F	-	RP115H311B	LVR-IC	LDO, 3.1V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D31G	-	RP115H311D	LVR-IC	LDO, 3.1V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D32D	-	R1150H032D	LVR/Vdet-IC	LDO, 3.4V±2%, 150mA, Vdet=2.0V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D32F	-	RP115H321B	LVR-IC	LDO, 3.2V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D32G	-	RP115H321D	LVR-IC	LDO, 3.2V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D33A	-	R1150H033A	LVR/Vdet-IC	LDO, 3.1V±2%, 150mA, Vdet=4.5V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D33F	-	RP115H331B	LVR-IC	LDO, 3.3V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D33G	-	RP115H331D	LVR-IC	LDO, 3.3V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D34C	-	R1150H034C	LVR/Vdet-IC	LDO, 5.0V±2%, 150mA, Vdet=13.0V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D34F	-	RP115H341B	LVR-IC	LDO, 3.4V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D34G	-	RP115H341D	LVR-IC	LDO, 3.4V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D35B	-	R1150H035B	LVR/Vdet-IC	LDO, 3.3V±2%, 150mA, Vdet=3.8V, -Reset ODO	SOT-89-5	32yb	VR14	6h	Ric
D35F	-	RP115H351B	LVR-IC	LDO, 3.5V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D35G	-	RP115H351D	LVR-IC	LDO, 3.5V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D36B	-	R1150H036B	LVR/Vdet-IC	LDO, 3.3V±2%, 150mA, Vdet=5.6V, -Reset ODO	SOT-89-5	32yb	VR14	6h	Ric
D36F	-	RP115H361B	LVR-IC	LDO, 3.6V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D36G	-	RP115H361D	LVR-IC	LDO, 3.6V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D37B	-	R1150H037B	LVR/Vdet-IC	LDO, 2.5V±2%, 150mA, Vdet=4.1V, -Reset ODO	SOT-89-5	32yb	VR14	6h	Ric
D37F	-	RP115H371B	LVR-IC	LDO, 3.7V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D37G	-	RP115H371D	LVR-IC	LDO, 3.7V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D38B	-	R1150H038B	LVR/Vdet-IC	LDO, 5.0V±2%, 150mA, Vdet=2.3V, -Reset ODO	SOT-89-5	32yb	VR14	6h	Ric
D38F	-	RP115H381B	LVR-IC	LDO, 3.8V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D38G	-	RP115H381D	LVR-IC	LDO, 3.8V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D39A	-	R1150H039A	LVR/Vdet-IC	LDO, 3.3V±2%, 150mA, Vdet=6.8V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D39F	-	RP115H391B	LVR-IC	LDO, 3.9V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D39G	-	RP115H391D	LVR-IC	LDO, 3.9V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D4	-	AP131-45Y	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
D4	-	ELM89242A	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
D40A	-	R1150H040A	LVR/Vdet-IC	LDO, 3.3V±2%, 150mA, Vdet=5.0V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D40F	-	RP115H401B	LVR-IC	LDO, 4.0V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D40G	-	RP115H401D	LVR-IC	LDO, 4.0V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D41C	-	R1150H041C	LVR/Vdet-IC	LDO, 7.0V±2%, 150mA, Vdet=7.5V, -Reset ODO	SOT-89-5	32yc	VR13	6h	Ric
D41F	-	RP115H411B	LVR-IC	LDO, 4.1V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D41G	-	RP115H411D	LVR-IC	LDO, 4.1V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D42A	-	R1150H042A	LVR/Vdet-IC	LDO, 5.6V±2%, 150mA, Vdet=4.5V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D42F	-	RP115H421B	LVR-IC	LDO, 4.2V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D42G	-	RP115H421D	LVR-IC	LDO, 4.2V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D43A	-	R1150H043A	LVR/Vdet-IC	LDO, 9.0V±2%, 150mA, Vdet=9.9V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D43F	-	RP115H431B	LVR-IC	LDO, 4.3V±1%, 500mA, +CE	SOT-89-5	32sa	VR6a	6h	Ric
D43G	-	RP115H431D	LVR-IC	LDO, 4.3V±1%, 500mA, +CE, CL	SOT-89-5	32sa	VR6a	6h	Ric
D44A	-	R1150H044A	LVR/Vdet-IC	LDO, 8.0V±2%, 150mA, Vdet=8.9V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D45A	-	R1150H045A	LVR/Vdet-IC	LDO, 5.0V±2%, 150mA, Vdet=5.6V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D46A	-	R1150H046A	LVR/Vdet-IC	LDO, 5.6V±2%, 150mA, Vdet=3.0V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D47A	-	R1150H047A	LVR/Vdet-IC	LDO, 12.0V±2%, 150mA, Vdet=5.0V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D48A	-	R1150H048A	LVR/Vdet-IC	LDO, 5.0V±2%, 150mA, Vdet=7.5V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D49A	-	R1150H049A	LVR/Vdet-IC	LDO, 2.85V±2%, 150mA, Vdet=4.5V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D5	-	AP131-46Y	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
D5	-	ELM89252A	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
D50A	-	R1150H050A	LVR/Vdet-IC	LDO, 5.4V±2%, 150mA, Vdet=3.0V, -Reset ODO	SOT-89-5	32ya	VR15	6h	Ric
D6	-	AP131-47Y	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
D6	-	ELM89262A	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
D7	-	AP131-48Y	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
D7	-	ELM89272A	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
D8	-	AP131-49Y	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
D8	-	ELM89282A	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
D9	-	AP131-50Y	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
D9	-	ELM89292A	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
DA	-	AP131-15Y	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DA-	-	XC62GR3012P	LVR-IC	3.0V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
DA-	ka	XC62GP3012P	LVR-IC	3.0V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
DA+	-	XC62GR3022P	LVR-IC	3.0V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DA+	ka	XC62GP3022P	LVR-IC	3.0V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DB	-	AP131-16Y	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DB-	-	XC62GR3112P	LVR-IC	3.1V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
DB-	ka	XC62GP3112P	LVR-IC	3.1V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
DB+	-	XC62GR3122P	LVR-IC	3.1V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DB+	ka	XC62GP3122P	LVR-IC	3.1V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DC	-	AP131-17Y	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DC-	-	XC62GR3212P	LVR-IC	3.2V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
DC-	ka	XC62GP3212P	LVR-IC	3.2V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
DC+	-	XC62GR3222P	LVR-IC	3.2V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DC+	ka	XC62GP3222P	LVR-IC	3.2V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DD	-	AP131-18Y	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DD-	-	XC62GR3312P	LVR-IC	3.3V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
DD-	ka	XC62GP3312P	LVR-IC	3.3V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
DD+	-	XC62GR3322P	LVR-IC	3.3V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DD+	ka	XC62GP3322P	LVR-IC	3.3V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DE	-	AP131-19Y	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DE-	-	XC62GR3412P	LVR-IC	3.4V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
DE-	ka	XC62GP3412P	LVR-IC	3.4V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
DE+	-	XC62GR3422P	LVR-IC	3.4V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DE+	ka	XC62GP3422P	LVR-IC	3.4V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DF	-	AP131-20Y	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DF-	-	XC62GR3512P	LVR-IC	3.5V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
DF-	ka	XC62GP3512P	LVR-IC	3.5V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
DF+	-	XC62GR3522P	LVR-IC	3.5V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DF+	ka	XC62GP3522P	LVR-IC	3.5V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DG	-	AP131-21Y	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DH	-	AP131-22Y	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DH-	-	XC62GR3612P	LVR-IC	3.6V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
DH-	ka	XC62GP3612P	LVR-IC	3.6V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
DH+	-	XC62GR3622P	LVR-IC	3.6V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DH+	ka	XC62GP3622P	LVR-IC	3.6V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DI	-	AP131-23Y	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DJ	-	AP131-24Y	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DK	-	AP131-25Y	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DK-	-	XC62GR3712P	LVR-IC	3.7V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
DK-	ka	XC62GP3712P	LVR-IC	3.7V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
DK+	-	XC62GR3722P	LVR-IC	3.7V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DK+	ka	XC62GP3722P	LVR-IC	3.7V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DL	-	AP131-26Y	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DL-	-	XC62GR3812P	LVR-IC	3.8V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
DL-	ka	XC62GP3812P	LVR-IC	3.8V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
DL+	-	XC62GR3822P	LVR-IC	3.8V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DL+	ka	XC62GP3822P	LVR-IC	3.8V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DM	-	AP131-27Y	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DM-	-	XC62GR3912P	LVR-IC	3.9V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
DM-	ka	XC62GP3912P	LVR-IC	3.9V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
DM+	-	XC62GR3922P	LVR-IC	3.9V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DM+	ka	XC62GP3922P	LVR-IC	3.9V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
DN	-	AP131-28Y	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DO	-	AP131-29Y	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DP	-	AP131-30Y	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DQ	-	AP131-31Y	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DR	-	AP131-32Y	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DS	-	AP131-33Y	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DT	-	AP131-34Y	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DU	-	AP131-35Y	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DV	-	AP131-36Y	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DW	-	AP131-37Y	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DX	-	AP131-38Y	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DY	-	AP131-39Y	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
DZ	-	AP131-40Y	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-89-5L	32vrx	VR4	6j	Ana
E0	-	ELM89302A	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
E1	-	ELM89312A	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
E15A	-	R1170H151A	LVR-IC	LDO, 1.5V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E15B	-	R1170H151B	LVR-IC	LDO, 1.5V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E16A	-	R1170H161A	LVR-IC	LDO, 1.6V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E16B	-	R1170H161B	LVR-IC	LDO, 1.6V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E17A	-	R1170H171A	LVR-IC	LDO, 1.7V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E17B	-	R1170H171B	LVR-IC	LDO, 1.7V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E18A	-	R1170H181A	LVR-IC	LDO, 1.8V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E18B	-	R1170H181B	LVR-IC	LDO, 1.8V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E19A	-	R1170H191A	LVR-IC	LDO, 1.9V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E19B	-	R1170H191B	LVR-IC	LDO, 1.9V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E2	-	ELM89322A	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
E20A	-	R1170H201A	LVR-IC	LDO, 2.0V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E20B	-	R1170H201B	LVR-IC	LDO, 2.0V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E21A	-	R1170H211A	LVR-IC	LDO, 2.1V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E21B	-	R1170H211B	LVR-IC	LDO, 2.1V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E22A	-	R1170H221A	LVR-IC	LDO, 2.2V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E22B	-	R1170H221B	LVR-IC	LDO, 2.2V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E23A	-	R1170H231A	LVR-IC	LDO, 2.3V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E23B	-	R1170H231B	LVR-IC	LDO, 2.3V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E24A	-	R1170H241A	LVR-IC	LDO, 2.4V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E24B	-	R1170H241B	LVR-IC	LDO, 2.4V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E25A	-	R1170H251A	LVR-IC	LDO, 2.5V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E25B	-	R1170H251B	LVR-IC	LDO, 2.5V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E26A	-	R1170H261A	LVR-IC	LDO, 2.6V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E26B	-	R1170H261B	LVR-IC	LDO, 2.6V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E27A	-	R1170H271A	LVR-IC	LDO, 2.7V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E27B	-	R1170H271B	LVR-IC	LDO, 2.7V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E28A	-	R1170H281A	LVR-IC	LDO, 2.8V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E28B	-	R1170H281B	LVR-IC	LDO, 2.8V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E29A	-	R1170H291A	LVR-IC	LDO, 2.9V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E29B	-	R1170H291B	LVR-IC	LDO, 2.9V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E3	-	ELM89332A	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
E30A	-	R1170H301A	LVR-IC	LDO, 3.0V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E30B	-	R1170H301B	LVR-IC	LDO, 3.0V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E31A	-	R1170H311A	LVR-IC	LDO, 3.1V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E31B	-	R1170H311B	LVR-IC	LDO, 3.1V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E32A	-	R1170H321A	LVR-IC	LDO, 3.2V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E32B	-	R1170H321B	LVR-IC	LDO, 3.2V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E33A	-	R1170H331A	LVR-IC	LDO, 3.3V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E33B	-	R1170H331B	LVR-IC	LDO, 3.3V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E34A	-	R1170H341A	LVR-IC	LDO, 3.4V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E34B	-	R1170H341B	LVR-IC	LDO, 3.4V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E35A	-	R1170H351A	LVR-IC	LDO, 3.5V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E35B	-	R1170H351B	LVR-IC	LDO, 3.5V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E36A	-	R1170H361A	LVR-IC	LDO, 3.6V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E36B	-	R1170H361B	LVR-IC	LDO, 3.6V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E37A	-	R1170H371A	LVR-IC	LDO, 3.7V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E37B	-	R1170H371B	LVR-IC	LDO, 3.7V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E38A	-	R1170H381A	LVR-IC	LDO, 3.8V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E38B	-	R1170H381B	LVR-IC	LDO, 3.8V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E39A	-	R1170H391A	LVR-IC	LDO, 3.9V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E39B	-	R1170H391B	LVR-IC	LDO, 3.9V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E4	-	ELM89342A	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
E40A	-	R1170H401A	LVR-IC	LDO, 4.0V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E40B	-	R1170H401B	LVR-IC	LDO, 4.0V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E41A	-	R1170H411A	LVR-IC	LDO, 4.1V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E41B	-	R1170H411B	LVR-IC	LDO, 4.1V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E42A	-	R1170H421A	LVR-IC	LDO, 4.2V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E42B	-	R1170H421B	LVR-IC	LDO, 4.2V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E43A	-	R1170H431A	LVR-IC	LDO, 4.3V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E43B	-	R1170H431B	LVR-IC	LDO, 4.3V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E44A	-	R1170H441A	LVR-IC	LDO, 4.4V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E44B	-	R1170H441B	LVR-IC	LDO, 4.4V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E45A	-	R1170H451A	LVR-IC	LDO, 4.5V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E45B	-	R1170H451B	LVR-IC	LDO, 4.5V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E46A	-	R1170H461A	LVR-IC	LDO, 4.6V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E46B	-	R1170H461B	LVR-IC	LDO, 4.6V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E47A	-	R1170H471A	LVR-IC	LDO, 4.7V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E47B	-	R1170H471B	LVR-IC	LDO, 4.7V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E48A	-	R1170H481A	LVR-IC	LDO, 4.8V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E48B	-	R1170H481B	LVR-IC	LDO, 4.8V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E49A	-	R1170H491A	LVR-IC	LDO, 4.9V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E49B	-	R1170H491B	LVR-IC	LDO, 4.9V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E5	-	ELM89352A	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
E50A	-	R1170H501A	LVR-IC	LDO, 5.0V±2%, 800mA, -CE	SOT-89-5	32vy	VR4	6h	Ric
E50B	-	R1170H501B	LVR-IC	LDO, 5.0V±2%, 800mA, +CE	SOT-89-5	32vy	VR4	6h	Ric
E6	-	ELM89362A	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
E7	-	ELM89372A	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
E8	-	ELM89382A	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
E9	-	ELM89392A	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
EA-	-	XC62GR4012P	LVR-IC	4.0V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
EA-	ka	XC62GP4012P	LVR-IC	4.0V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
EA+	-	XC62GR4022P	LVR-IC	4.0V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
EA+	ka	XC62GP4022P	LVR-IC	4.0V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
EB-	-	XC62GR4112P	LVR-IC	4.1V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
EB-	ka	XC62GP4112P	LVR-IC	4.1V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
EB+	-	XC62GR4122P	LVR-IC	4.1V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
EB+	ka	XC62GP4122P	LVR-IC	4.1V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
EC-	-	XC62GR4212P	LVR-IC	4.2V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
EC-	ka	XC62GP4212P	LVR-IC	4.2V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
EC+	-	XC62GR4222P	LVR-IC	4.2V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
EC+	ka	XC62GP4222P	LVR-IC	4.2V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
ED-	-	XC62GR4312P	LVR-IC	4.3V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
ED-	ka	XC62GP4312P	LVR-IC	4.3V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
ED+	-	XC62GR4322P	LVR-IC	4.3V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
ED+	ka	XC62GP4322P	LVR-IC	4.3V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EE-	-	XC62GR4412P	LVR-IC	4.4V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
EE-	ka	XC62GP4412P	LVR-IC	4.4V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
EE+	-	XC62GR4422P	LVR-IC	4.4V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
EE+	ka	XC62GP4422P	LVR-IC	4.4V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
EF-	-	XC62GR4512P	LVR-IC	4.5V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
EF-	ka	XC62GP4512P	LVR-IC	4.5V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
EF+	-	XC62GR4522P	LVR-IC	4.5V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
EF+	ka	XC62GP4522P	LVR-IC	4.5V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
EH-	-	XC62GR4612P	LVR-IC	4.6V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
EH-	ka	XC62GP4612P	LVR-IC	4.6V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
EH+	-	XC62GR4622P	LVR-IC	4.6V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
EH+	ka	XC62GP4622P	LVR-IC	4.6V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
EH13	-	AIC1731-13CX5	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH13G	-	AIC1731-13CX5G	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH13P	-	AIC1731-13CX5P	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH15	-	AIC1731-15CX5	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH15G	-	AIC1731-15CX5G	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH15P	-	AIC1731-15CX5P	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH18	-	AIC1731-18CX5	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH18G	-	AIC1731-18CX5G	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH18P	-	AIC1731-18CX5P	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH25	-	AIC1731-25CX5	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH25G	-	AIC1731-25CX5G	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH25P	-	AIC1731-25CX5P	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH28	-	AIC1731-28CX5	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH28G	-	AIC1731-28CX5G	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH28P	-	AIC1731-28CX5P	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH30	-	AIC1731-30CX5	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH30G	-	AIC1731-30CX5G	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH30P	-	AIC1731-30CX5P	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH33	-	AIC1731-33CX5	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH33G	-	AIC1731-33CX5G	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EH33P	-	AIC1731-33CX5P	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI13	-	AIC1733-13CX5	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI13G	-	AIC1733-13CX5G	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI13P	-	AIC1733-13CX5P	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI15	-	AIC1733-15CX5	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI15G	-	AIC1733-15CX5G	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI15P	-	AIC1733-15CX5P	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI18	-	AIC1733-18CX5	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI18G	-	AIC1733-18CX5G	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI18P	-	AIC1733-18CX5P	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI25	-	AIC1733-25CX5	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI25G	-	AIC1733-25CX5G	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI25P	-	AIC1733-25CX5P	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI28	-	AIC1733-28CX5	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI28G	-	AIC1733-28CX5G	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI28P	-	AIC1733-28CX5P	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI30	-	AIC1733-30CX5	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI30G	-	AIC1733-30CX5G	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI30P	-	AIC1733-30CX5P	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI33	-	AIC1733-33CX5	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI33G	-	AIC1733-33CX5G	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EI33P	-	AIC1733-33CX5P	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
EK-	-	XC62GR4712P	LVR-IC	4.7V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
EK-	ka	XC62GP4712P	LVR-IC	4.7V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
EK+	-	XC62GR4722P	LVR-IC	4.7V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
EK+	ka	XC62GP4722P	LVR-IC	4.7V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
EL-	-	XC62GR4812P	LVR-IC	4.8V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
EL-	ka	XC62GP4812P	LVR-IC	4.8V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
EL+	-	XC62GR4822P	LVR-IC	4.8V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
EL+	ka	XC62GP4822P	LVR-IC	4.8V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
EM-	-	XC62GR4912P	LVR-IC	4.9V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
EM-	ka	XC62GP4912P	LVR-IC	4.9V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
EM+	-	XC62GR4922P	LVR-IC	4.9V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
EM+	ka	XC62GP4922P	LVR-IC	4.9V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
ET	-	AP1602BY	DC-DC-IC	Step-up DC-DC converter for NiMH battery charge (3.3V)	SOT-89-5	32st	-	6j	Ana
EZ	-	AP1602AY	DC-DC-IC	Step-up DC-DC converter for NiMH battery charge (3.3V)	SOT-89-5	32sr	-	6j	Ana
F0	-	ELM89402A	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	SOT-89-5	32gw	VR4	6n	Elm
FA	-	ELM99202B	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FA-	-	XC62GR5012P	LVR-IC	5.0V±2%, 150mA, +CE	SOT-89-5	32ex	VR4	6h	Tor
FA-	ka	XC62GP5012P	LVR-IC	5.0V±2%, 150mA, -CE	SOT-89-5	32ex	VR4	6h	Tor
FA+	-	XC62GR5022P	LVR-IC	5.0V±2%, 150mA, +CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
FA+	ka	XC62GP5022P	LVR-IC	5.0V±2%, 150mA, -CE, HS response	SOT-89-5	32ex	VR4	6h	Tor
FB	-	ELM99212B	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
FC	-	ELM99222B	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
FD	-	ELM99232B	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
FE	-	ELM99242B	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
FF	-	ELM99252B	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
FG	-	ELM99262B	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
FH	-	ELM99272B	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
FI11G	-	AIC1747-11GX5N	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI11P	-	AIC1747-11PX5N	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI12G	-	AIC1747-12GX5N	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI12P	-	AIC1747-12PX5N	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI13G	-	AIC1747-13GX5N	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI13P	-	AIC1747-13PX5N	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI15G	-	AIC1747-15GX5N	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI15P	-	AIC1747-15PX5N	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI18G	-	AIC1747-18GX5N	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI18P	-	AIC1747-18PX5N	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI20G	-	AIC1747-20GX5N	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI20P	-	AIC1747-20PX5N	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI25G	-	AIC1747-25GX5N	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI25P	-	AIC1747-25PX5N	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI27G	-	AIC1747-27GX5N	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI27P	-	AIC1747-27PX5N	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI2JG	-	AIC1747-285GX5N	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI2JP	-	AIC1747-285PX5N	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI30G	-	AIC1747-30GX5N	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI30P	-	AIC1747-30PX5N	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI33G	-	AIC1747-33GX5N	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI33P	-	AIC1747-33PX5N	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI35G	-	AIC1747-35GX5N	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI35P	-	AIC1747-35PX5N	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI37G	-	AIC1747-37GX5N	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI37P	-	AIC1747-37PX5N	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI38G	-	AIC1747-38GX5N	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FI38P	-	AIC1747-38PX5N	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FJ	-	ELM99282B	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
FK	-	ELM99292B	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
FR0	-	XC6901D091PR-G	LVR-IC	-0.9V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FR1	-	XC6901D101PR-G	LVR-IC	-1.0V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FR11G	-	AIC1746-11GX5N	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR11P	-	AIC1746-11PX5N	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR12G	-	AIC1746-12GX5N	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR12P	-	AIC1746-12PX5N	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR13G	-	AIC1746-13GX5N	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR13P	-	AIC1746-13PX5N	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR15G	-	AIC1746-15GX5N	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR15P	-	AIC1746-15PX5N	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR18G	-	AIC1746-18GX5N	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR18P	-	AIC1746-18PX5N	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR2	-	XC6901D111PR-G	LVR-IC	-1.1V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FR20G	-	AIC1746-20GX5N	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR20P	-	AIC1746-20PX5N	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR25G	-	AIC1746-25GX5N	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR25P	-	AIC1746-25PX5N	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR27G	-	AIC1746-27GX5N	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR27P	-	AIC1746-27PX5N	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR2JG	-	AIC1746-285GX5N	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR2JP	-	AIC1746-285PX5N	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR3	-	XC6901D121PR-G	LVR-IC	-1.2V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FR30G	-	AIC1746-30GX5N	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR30P	-	AIC1746-30PX5N	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR33G	-	AIC1746-33GX5N	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR33P	-	AIC1746-33PX5N	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR35G	-	AIC1746-35GX5N	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR35P	-	AIC1746-35PX5N	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR37G	-	AIC1746-37GX5N	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FR37P	-	AIC1746-37PX5N	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR38G	-	AIC1746-38GX5N	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR38P	-	AIC1746-38PX5N	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-89-5	32cx	VR4	6j	Aic
FR4	-	XC6901D131PR-G	LVR-IC	-1.3V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FR5	-	XC6901D141PR-G	LVR-IC	-1.4V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FR6	-	XC6901D151PR-G	LVR-IC	-1.5V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FR7	-	XC6901D161PR-G	LVR-IC	-1.6V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FR8	-	XC6901D171PR-G	LVR-IC	-1.7V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FR9	-	XC6901D181PR-G	LVR-IC	-1.8V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRA	-	XC6901D191PR-G	LVR-IC	-1.9V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRB	-	XC6901D201PR-G	LVR-IC	-2.0V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRC	-	XC6901D211PR-G	LVR-IC	-2.1V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRD	-	XC6901D221PR-G	LVR-IC	-2.2V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRE	-	XC6901D231PR-G	LVR-IC	-2.3V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRF	-	XC6901D241PR-G	LVR-IC	-2.4V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRH	-	XC6901D251PR-G	LVR-IC	-2.5V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRK	-	XC6901D261PR-G	LVR-IC	-2.6V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRL	-	XC6901D271PR-G	LVR-IC	-2.7V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRM	-	XC6901D281PR-G	LVR-IC	-2.8V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRN	-	XC6901D291PR-G	LVR-IC	-2.9V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRP	-	XC6901D301PR-G	LVR-IC	-3.0V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRR	-	XC6901D311PR-G	LVR-IC	-3.1V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRS	-	XC6901D321PR-G	LVR-IC	-3.2V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRT	-	XC6901D331PR-G	LVR-IC	-3.3V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRU	-	XC6901D341PR-G	LVR-IC	-3.4V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRV	-	XC6901D351PR-G	LVR-IC	-3.5V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRX	-	XC6901D361PR-G	LVR-IC	-3.6V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRY	-	XC6901D371PR-G	LVR-IC	-3.7V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FRZ	-	XC6901D381PR-G	LVR-IC	-3.8V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FS0	-	XC6901D391PR-G	LVR-IC	-3.9V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FS1	-	XC6901D401PR-G	LVR-IC	-4.0V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FS2	-	XC6901D411PR-G	LVR-IC	-4.1V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FS3	-	XC6901D421PR-G	LVR-IC	-4.2V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FS4	-	XC6901D431PR-G	LVR-IC	-4.3V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FS5	-	XC6901D441PR-G	LVR-IC	-4.4V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FS6	-	XC6901D451PR-G	LVR-IC	-4.5V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FS7	-	XC6901D461PR-G	LVR-IC	-4.6V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FS8	-	XC6901D471PR-G	LVR-IC	-4.7V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FS9	-	XC6901D481PR-G	LVR-IC	-4.8V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSA	-	XC6901D491PR-G	LVR-IC	-4.9V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSB	-	XC6901D501PR-G	LVR-IC	-5.0V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSC	-	XC6901D511PR-G	LVR-IC	-5.1V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSD	-	XC6901D521PR-G	LVR-IC	-5.2V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSE	-	XC6901D531PR-G	LVR-IC	-5.3V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSF	-	XC6901D541PR-G	LVR-IC	-5.4V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSH	-	XC6901D551PR-G	LVR-IC	-5.5V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSK	-	XC6901D561PR-G	LVR-IC	-5.6V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSL	-	XC6901D571PR-G	LVR-IC	-5.7V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSM	-	XC6901D581PR-G	LVR-IC	-5.8V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSN	-	XC6901D591PR-G	LVR-IC	-5.9V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSP	-	XC6901D601PR-G	LVR-IC	-6.0V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSR	-	XC6901D611PR-G	LVR-IC	-6.1V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSS	-	XC6901D621PR-G	LVR-IC	-6.2V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FST	-	XC6901D631PR-G	LVR-IC	-6.3V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSU	-	XC6901D641PR-G	LVR-IC	-6.4V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSV	-	XC6901D651PR-G	LVR-IC	-6.5V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSX	-	XC6901D661PR-G	LVR-IC	-6.6V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSY	-	XC6901D671PR-G	LVR-IC	-6.7V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FSZ	-	XC6901D681PR-G	LVR-IC	-6.8V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FT0	-	XC6901D691PR-G	LVR-IC	-6.9V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FT1	-	XC6901D701PR-G	LVR-IC	-7.0V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FT2	-	XC6901D711PR-G	LVR-IC	-7.1V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FT3	-	XC6901D721PR-G	LVR-IC	-7.2V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FT4	-	XC6901D731PR-G	LVR-IC	-7.3V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FT5	-	XC6901D741PR-G	LVR-IC	-7.4V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FT6	-	XC6901D751PR-G	LVR-IC	-7.5V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FT7	-	XC6901D761PR-G	LVR-IC	-7.6V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FT8	-	XC6901D771PR-G	LVR-IC	-7.7V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FT9	-	XC6901D781PR-G	LVR-IC	-7.8V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTA	-	XC6901D791PR-G	LVR-IC	-7.9V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FTB	-	XC6901D801PR-G	LVR-IC	-8.0V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTC	-	XC6901D811PR-G	LVR-IC	-8.1V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTD	-	XC6901D821PR-G	LVR-IC	-8.2V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTE	-	XC6901D831PR-G	LVR-IC	-8.3V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTF	-	XC6901D841PR-G	LVR-IC	-8.4V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTH	-	XC6901D851PR-G	LVR-IC	-8.5V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTK	-	XC6901D861PR-G	LVR-IC	-8.6V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTL	-	XC6901D871PR-G	LVR-IC	-8.7V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTM	-	XC6901D881PR-G	LVR-IC	-8.8V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTN	-	XC6901D891PR-G	LVR-IC	-8.9V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTP	-	XC6901D901PR-G	LVR-IC	-9.0V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTR	-	XC6901D911PR-G	LVR-IC	-9.1V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTS	-	XC6901D921PR-G	LVR-IC	-9.2V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTT	-	XC6901D931PR-G	LVR-IC	-9.3V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTU	-	XC6901D941PR-G	LVR-IC	-9.4V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTV	-	XC6901D951PR-G	LVR-IC	-9.5V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTX	-	XC6901D961PR-G	LVR-IC	-9.6V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTY	-	XC6901D971PR-G	LVR-IC	-9.7V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FTZ	-	XC6901D981PR-G	LVR-IC	-9.8V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FU0	-	XC6901D991PR-G	LVR-IC	-9.9V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FU1	-	XC6901DA01PR-G	LVR-IC	-10.0V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FU2	-	XC6901DA11PR-G	LVR-IC	-10.1V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FU3	-	XC6901DA21PR-G	LVR-IC	-10.2V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FU4	-	XC6901DA31PR-G	LVR-IC	-10.3V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FU5	-	XC6901DA41PR-G	LVR-IC	-10.4V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FU6	-	XC6901DA51PR-G	LVR-IC	-10.5V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FU7	-	XC6901DA61PR-G	LVR-IC	-10.6V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FU8	-	XC6901DA71PR-G	LVR-IC	-10.7V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FU9	-	XC6901DA81PR-G	LVR-IC	-10.8V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FUA	-	XC6901DA91PR-G	LVR-IC	-10.9V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FUB	-	XC6901DB01PR-G	LVR-IC	-11.0V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FUC	-	XC6901DB11PR-G	LVR-IC	-11.1V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FUD	-	XC6901DB21PR-G	LVR-IC	-11.2V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FUE	-	XC6901DB31PR-G	LVR-IC	-11.3V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FUF	-	XC6901DB41PR-G	LVR-IC	-11.4V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FUH	-	XC6901DB51PR-G	LVR-IC	-11.5V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FUK	-	XC6901DB61PR-G	LVR-IC	-11.6V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FUL	-	XC6901DB71PR-G	LVR-IC	-11.7V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FUM	-	XC6901DB81PR-G	LVR-IC	-11.8V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FUN	-	XC6901DB91PR-G	LVR-IC	-11.9V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
FUP	-	XC6901DC01PR-G	LVR-IC	-12.0V±1.5%, 200mA, +CE, CL	SOT-89-5	32ex	VR7	6n	Tor
G0	-	ELM89203A	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
G001	-	R1154H001C	LVR-IC	LDO, Adjustable, 150mA, +CE	SOT-89-5	32vrr	VR16	6h	Ric
G025	-	R1154H025B	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G026	-	R1154H026B	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G027	-	R1154H027B	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G028	-	R1154H028B	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G029	-	R1154H029B	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G030	-	R1154H030B	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G031	-	R1154H031B	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G032	-	R1154H032B	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G033	-	R1154H033B	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G034	-	R1154H034B	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G035	-	R1154H035B	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G036	-	R1154H036B	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G037	-	R1154H037B	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G038	-	R1154H038B	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G039	-	R1154H039B	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G040	-	R1154H040B	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G041	-	R1154H041B	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G042	-	R1154H042B	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G043	-	R1154H043B	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G044	-	R1154H044B	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G045	-	R1154H045B	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G046	-	R1154H046B	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G047	-	R1154H047B	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G048	-	R1154H048B	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G049	-	R1154H049B	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G050	-	R1154H050B	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G051	-	R1154H051B	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G052	-	R1154H052B	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G053	-	R1154H053B	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G054	-	R1154H054B	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G055	-	R1154H055B	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G056	-	R1154H056B	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G057	-	R1154H057B	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G058	-	R1154H058B	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G059	-	R1154H059B	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G060	-	R1154H060B	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G061	-	R1154H061B	LVR-IC	LDO, 6.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G062	-	R1154H062B	LVR-IC	LDO, 6.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G063	-	R1154H063B	LVR-IC	LDO, 6.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G064	-	R1154H064B	LVR-IC	LDO, 6.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G065	-	R1154H065B	LVR-IC	LDO, 6.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G066	-	R1154H066B	LVR-IC	LDO, 6.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G067	-	R1154H067B	LVR-IC	LDO, 6.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G068	-	R1154H068B	LVR-IC	LDO, 6.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G069	-	R1154H069B	LVR-IC	LDO, 6.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G070	-	R1154H070B	LVR-IC	LDO, 7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G071	-	R1154H071B	LVR-IC	LDO, 7.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G072	-	R1154H072B	LVR-IC	LDO, 7.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G073	-	R1154H073B	LVR-IC	LDO, 7.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G074	-	R1154H074B	LVR-IC	LDO, 7.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G075	-	R1154H075B	LVR-IC	LDO, 7.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G076	-	R1154H076B	LVR-IC	LDO, 7.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G077	-	R1154H077B	LVR-IC	LDO, 7.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G078	-	R1154H078B	LVR-IC	LDO, 7.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G079	-	R1154H079B	LVR-IC	LDO, 7.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G080	-	R1154H080B	LVR-IC	LDO, 8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G081	-	R1154H081B	LVR-IC	LDO, 8.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G082	-	R1154H082B	LVR-IC	LDO, 8.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G083	-	R1154H083B	LVR-IC	LDO, 8.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G084	-	R1154H084B	LVR-IC	LDO, 8.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G085	-	R1154H085B	LVR-IC	LDO, 8.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G086	-	R1154H086B	LVR-IC	LDO, 8.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G087	-	R1154H087B	LVR-IC	LDO, 8.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G088	-	R1154H088B	LVR-IC	LDO, 8.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G089	-	R1154H089B	LVR-IC	LDO, 8.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G090	-	R1154H090B	LVR-IC	LDO, 9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G091	-	R1154H091B	LVR-IC	LDO, 9.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G092	-	R1154H092B	LVR-IC	LDO, 9.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G093	-	R1154H093B	LVR-IC	LDO, 9.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G094	-	R1154H094B	LVR-IC	LDO, 9.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G095	-	R1154H095B	LVR-IC	LDO, 9.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G096	-	R1154H096B	LVR-IC	LDO, 9.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G097	-	R1154H097B	LVR-IC	LDO, 9.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G098	-	R1154H098B	LVR-IC	LDO, 9.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G099	-	R1154H099B	LVR-IC	LDO, 9.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G1	-	ELM89213A	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
G100	-	R1154H100B	LVR-IC	LDO, 10V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G101	-	R1154H101B	LVR-IC	LDO, 10.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G102	-	R1154H102B	LVR-IC	LDO, 10.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G103	-	R1154H103B	LVR-IC	LDO, 10.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G104	-	R1154H104B	LVR-IC	LDO, 10.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G105	-	R1154H105B	LVR-IC	LDO, 10.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G106	-	R1154H106B	LVR-IC	LDO, 10.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G107	-	R1154H107B	LVR-IC	LDO, 10.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G108	-	R1154H108B	LVR-IC	LDO, 10.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G109	-	R1154H109B	LVR-IC	LDO, 10.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G110	-	R1154H110B	LVR-IC	LDO, 11V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G111	-	R1154H111B	LVR-IC	LDO, 11.1V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G112	-	R1154H112B	LVR-IC	LDO, 11.2V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G113	-	R1154H113B	LVR-IC	LDO, 11.3V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G114	-	R1154H114B	LVR-IC	LDO, 11.4V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G115	-	R1154H115B	LVR-IC	LDO, 11.5V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G116	-	R1154H116B	LVR-IC	LDO, 11.6V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G117	-	R1154H117B	LVR-IC	LDO, 11.7V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G118	-	R1154H118B	LVR-IC	LDO, 11.8V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G119	-	R1154H119B	LVR-IC	LDO, 11.9V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
G120	-	R1154H120B	LVR-IC	LDO, 12V±2%, 150mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G2	-	ELM89223A	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
G3	-	ELM89233A	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
G4	-	ELM89243A	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
G5	-	ELM89253A	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
G6	-	ELM89263A	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
G7	-	ELM89273A	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
G8	-	ELM89283A	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
G9	-	ELM89293A	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
GA	-	ELM99302B	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
GB	-	ELM99312B	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
GB08G	-	AIC1748BH-08GX5	LVR-IC	LDO, 0.8V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB09G	-	AIC1748BH-09GX5	LVR-IC	LDO, 0.9V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB10G	-	AIC1748BH-10GX5	LVR-IC	LDO, 1.0V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB11G	-	AIC1748BH-11GX5	LVR-IC	LDO, 1.1V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB12G	-	AIC1748BH-12GX5	LVR-IC	LDO, 1.2V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB13G	-	AIC1748BH-13GX5	LVR-IC	LDO, 1.3V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB14G	-	AIC1748BH-14GX5	LVR-IC	LDO, 1.4V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB15G	-	AIC1748BH-15GX5	LVR-IC	LDO, 1.5V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB16G	-	AIC1748BH-16GX5	LVR-IC	LDO, 1.6V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB17G	-	AIC1748BH-17GX5	LVR-IC	LDO, 1.7V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB18G	-	AIC1748BH-18GX5	LVR-IC	LDO, 1.8V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB19G	-	AIC1748BH-19GX5	LVR-IC	LDO, 1.9V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB20G	-	AIC1748BH-20GX5	LVR-IC	LDO, 2.0V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB21G	-	AIC1748BH-21GX5	LVR-IC	LDO, 2.1V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB22G	-	AIC1748BH-22GX5	LVR-IC	LDO, 2.2V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB23G	-	AIC1748BH-23GX5	LVR-IC	LDO, 2.3V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB24G	-	AIC1748BH-24GX5	LVR-IC	LDO, 2.4V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB25G	-	AIC1748BH-25GX5	LVR-IC	LDO, 2.5V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB26G	-	AIC1748BH-26GX5	LVR-IC	LDO, 2.6V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB27G	-	AIC1748BH-27GX5	LVR-IC	LDO, 2.7V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB28G	-	AIC1748BH-28GX5	LVR-IC	LDO, 2.8V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB29G	-	AIC1748BH-29GX5	LVR-IC	LDO, 2.9V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB2JG	-	AIC1748BH-285GX5	LVR-IC	LDO, 2.85V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB30G	-	AIC1748BH-30GX5	LVR-IC	LDO, 3.0V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB31G	-	AIC1748BH-31GX5	LVR-IC	LDO, 3.1V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB32G	-	AIC1748BH-32GX5	LVR-IC	LDO, 3.2V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GB33G	-	AIC1748BH-33GX5	LVR-IC	LDO, 3.3V±2%, 600mA, +CE	SOT-89-5	32vrx	VR7	6j	Aic
GC	-	ELM99322B	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
GC08G	-	AIC1748BL-08GX5	LVR-IC	LDO, 0.8V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC09G	-	AIC1748BL-09GX5	LVR-IC	LDO, 0.9V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC10G	-	AIC1748BL-10GX5	LVR-IC	LDO, 1.0V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC11G	-	AIC1748BL-11GX5	LVR-IC	LDO, 1.1V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC12G	-	AIC1748BL-12GX5	LVR-IC	LDO, 1.2V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC13G	-	AIC1748BL-13GX5	LVR-IC	LDO, 1.3V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC14G	-	AIC1748BL-14GX5	LVR-IC	LDO, 1.4V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC15G	-	AIC1748BL-15GX5	LVR-IC	LDO, 1.5V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC16G	-	AIC1748BL-16GX5	LVR-IC	LDO, 1.6V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC17G	-	AIC1748BL-17GX5	LVR-IC	LDO, 1.7V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC18G	-	AIC1748BL-18GX5	LVR-IC	LDO, 1.8V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC19G	-	AIC1748BL-19GX5	LVR-IC	LDO, 1.9V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC20G	-	AIC1748BL-20GX5	LVR-IC	LDO, 2.0V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC21G	-	AIC1748BL-21GX5	LVR-IC	LDO, 2.1V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC22G	-	AIC1748BL-22GX5	LVR-IC	LDO, 2.2V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC23G	-	AIC1748BL-23GX5	LVR-IC	LDO, 2.3V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC24G	-	AIC1748BL-24GX5	LVR-IC	LDO, 2.4V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC25G	-	AIC1748BL-25GX5	LVR-IC	LDO, 2.5V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC26G	-	AIC1748BL-26GX5	LVR-IC	LDO, 2.6V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC27G	-	AIC1748BL-27GX5	LVR-IC	LDO, 2.7V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC28G	-	AIC1748BL-28GX5	LVR-IC	LDO, 2.8V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC29G	-	AIC1748BL-29GX5	LVR-IC	LDO, 2.9V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC2JG	-	AIC1748BL-285GX5	LVR-IC	LDO, 2.85V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC30G	-	AIC1748BL-30GX5	LVR-IC	LDO, 3.0V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC31G	-	AIC1748BL-31GX5	LVR-IC	LDO, 3.1V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC32G	-	AIC1748BL-32GX5	LVR-IC	LDO, 3.2V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GC33G	-	AIC1748BL-33GX5	LVR-IC	LDO, 3.3V±2%, 600mA, -CE	SOT-89-5	32vrx	VR7	6j	Aic
GD	-	ELM99332B	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
GE	-	ELM99342B	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
GF	-	ELM99352B	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
GG	-	ELM99362B	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
GH	-	ELM99372B	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GIG	-	AIC1748AH-285GX5	LVR-IC	LDO, Adjustable 0.8..4.5V, 600mA, +CE	SOT-89-5	32sg	VR5	6j	Aic
GJ	-	ELM99382B	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
GJG	-	AIC1748AL-285GX5	LVR-IC	LDO, Adjustable 0.8..4.5V, 600mA, -CE	SOT-89-5	32sg	VR5	6j	Aic
GK	-	ELM99392B	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
H0	-	ELM89303A	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
H08	-	XC6220A081PR	LVR-IC	LDO, 0.8V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H09	-	XC6220A091PR	LVR-IC	LDO, 0.9V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0A	-	XC6220A101PR	LVR-IC	LDO, 1.0V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0B	-	XC6220A111PR	LVR-IC	LDO, 1.1V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0C	-	XC6220A121PR	LVR-IC	LDO, 1.2V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0D	-	XC6220A131PR	LVR-IC	LDO, 1.3V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0E	-	XC6220A141PR	LVR-IC	LDO, 1.4V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0F	-	XC6220A151PR	LVR-IC	LDO, 1.5V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0H	-	XC6220A161PR	LVR-IC	LDO, 1.6V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0K	-	XC6220A171PR	LVR-IC	LDO, 1.7V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0L	-	XC6220A181PR	LVR-IC	LDO, 1.8V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0M	-	XC6220A191PR	LVR-IC	LDO, 1.9V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0N	-	XC6220A201PR	LVR-IC	LDO, 2.0V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0P	-	XC6220A211PR	LVR-IC	LDO, 2.1V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0R	-	XC6220A221PR	LVR-IC	LDO, 2.2V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0S	-	XC6220A231PR	LVR-IC	LDO, 2.3V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0T	-	XC6220A241PR	LVR-IC	LDO, 2.4V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0U	-	XC6220A251PR	LVR-IC	LDO, 2.5V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0V	-	XC6220A261PR	LVR-IC	LDO, 2.6V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0X	-	XC6220A271PR	LVR-IC	LDO, 2.7V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0Y	-	XC6220A281PR	LVR-IC	LDO, 2.8V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H0Z	-	XC6220A291PR	LVR-IC	LDO, 2.9V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1	-	ELM89313A	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
H18	-	XC6220A08BPR	LVR-IC	LDO, 0.85V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H19	-	XC6220A09BPR	LVR-IC	LDO, 0.95V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1A	-	XC6220A10BPR	LVR-IC	LDO, 1.05V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1B	-	XC6220A11BPR	LVR-IC	LDO, 1.15V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1C	-	XC6220A12BPR	LVR-IC	LDO, 1.25V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1D	-	XC6220A13BPR	LVR-IC	LDO, 1.35V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1E	-	XC6220A14BPR	LVR-IC	LDO, 1.45V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1F	-	XC6220A15BPR	LVR-IC	LDO, 1.55V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1H	-	XC6220A16BPR	LVR-IC	LDO, 1.65V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1K	-	XC6220A17BPR	LVR-IC	LDO, 1.75V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1L	-	XC6220A18BPR	LVR-IC	LDO, 1.85V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1M	-	XC6220A19BPR	LVR-IC	LDO, 1.95V±20mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1N	-	XC6220A20BPR	LVR-IC	LDO, 2.05V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1P	-	XC6220A21BPR	LVR-IC	LDO, 2.15V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1R	-	XC6220A22BPR	LVR-IC	LDO, 2.25V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1S	-	XC6220A23BPR	LVR-IC	LDO, 2.35V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1T	-	XC6220A24BPR	LVR-IC	LDO, 2.45V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1U	-	XC6220A25BPR	LVR-IC	LDO, 2.55V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1V	-	XC6220A26BPR	LVR-IC	LDO, 2.65V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1X	-	XC6220A27BPR	LVR-IC	LDO, 2.75V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1Y	-	XC6220A28BPR	LVR-IC	LDO, 2.85V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H1Z	-	XC6220A29BPR	LVR-IC	LDO, 2.95V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H2	-	ELM89323A	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
H20	-	XC6220A301PR	LVR-IC	LDO, 3.0V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H21	-	XC6220A311PR	LVR-IC	LDO, 3.1V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H22	-	XC6220A321PR	LVR-IC	LDO, 3.2V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H23	-	XC6220A331PR	LVR-IC	LDO, 3.3V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H24	-	XC6220A341PR	LVR-IC	LDO, 3.4V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H25	-	XC6220A351PR	LVR-IC	LDO, 3.5V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H26	-	XC6220A361PR	LVR-IC	LDO, 3.6V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H27	-	XC6220A371PR	LVR-IC	LDO, 3.7V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H28	-	XC6220A381PR	LVR-IC	LDO, 3.8V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H29	-	XC6220A391PR	LVR-IC	LDO, 3.9V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H2A	-	XC6220A401PR	LVR-IC	LDO, 4.0V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H2B	-	XC6220A411PR	LVR-IC	LDO, 4.1V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H2C	-	XC6220A421PR	LVR-IC	LDO, 4.2V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H2D	-	XC6220A431PR	LVR-IC	LDO, 4.3V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H2E	-	XC6220A441PR	LVR-IC	LDO, 4.4V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H2F	-	XC6220A451PR	LVR-IC	LDO, 4.5V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H2H	-	XC6220A461PR	LVR-IC	LDO, 4.6V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H2K	-	XC6220A471PR	LVR-IC	LDO, 4.7V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H2L	-	XC6220A481PR	LVR-IC	LDO, 4.8V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H2M	-	XC6220A491PR	LVR-IC	LDO, 4.9V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H2N	-	XC6220A501PR	LVR-IC	LDO, 5.0V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H3	-	ELM89333A	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
H30	-	XC6220A30BPR	LVR-IC	LDO, 3.05V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H31	-	XC6220A31BPR	LVR-IC	LDO, 3.15V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H32	-	XC6220A32BPR	LVR-IC	LDO, 3.25V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H33	-	XC6220A33BPR	LVR-IC	LDO, 3.35V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H34	-	XC6220A34BPR	LVR-IC	LDO, 3.45V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H35	-	XC6220A35BPR	LVR-IC	LDO, 3.55V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H36	-	XC6220A36BPR	LVR-IC	LDO, 3.65V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H37	-	XC6220A37BPR	LVR-IC	LDO, 3.75V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H38	-	XC6220A38BPR	LVR-IC	LDO, 3.85V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H39	-	XC6220A39BPR	LVR-IC	LDO, 3.95V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H3A	-	XC6220A40BPR	LVR-IC	LDO, 4.05V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H3B	-	XC6220A41BPR	LVR-IC	LDO, 4.15V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H3C	-	XC6220A42BPR	LVR-IC	LDO, 4.25V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H3D	-	XC6220A43BPR	LVR-IC	LDO, 4.35V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H3E	-	XC6220A44BPR	LVR-IC	LDO, 4.45V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H3F	-	XC6220A45BPR	LVR-IC	LDO, 4.55V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H3H	-	XC6220A46BPR	LVR-IC	LDO, 4.65V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H3K	-	XC6220A47BPR	LVR-IC	LDO, 4.75V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H3L	-	XC6220A48BPR	LVR-IC	LDO, 4.85V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H3M	-	XC6220A49BPR	LVR-IC	LDO, 4.95V±1%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Tor
H4	-	ELM89343A	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
H48	-	XC6220B081PR	LVR-IC	LDO, 0.8V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H49	-	XC6220B091PR	LVR-IC	LDO, 0.9V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4A	-	XC6220B101PR	LVR-IC	LDO, 1.0V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4B	-	XC6220B111PR	LVR-IC	LDO, 1.1V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4C	-	XC6220B121PR	LVR-IC	LDO, 1.2V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4D	-	XC6220B131PR	LVR-IC	LDO, 1.3V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4E	-	XC6220B141PR	LVR-IC	LDO, 1.4V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4F	-	XC6220B151PR	LVR-IC	LDO, 1.5V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4H	-	XC6220B161PR	LVR-IC	LDO, 1.6V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4K	-	XC6220B171PR	LVR-IC	LDO, 1.7V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4L	-	XC6220B181PR	LVR-IC	LDO, 1.8V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4M	-	XC6220B191PR	LVR-IC	LDO, 1.9V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4N	-	XC6220B201PR	LVR-IC	LDO, 2.0V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4P	-	XC6220B211PR	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4R	-	XC6220B221PR	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4S	-	XC6220B231PR	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4T	-	XC6220B241PR	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4U	-	XC6220B251PR	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4V	-	XC6220B261PR	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4X	-	XC6220B271PR	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4Y	-	XC6220B281PR	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H4Z	-	XC6220B291PR	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5	-	ELM89353A	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
H58	-	XC6220B08BPR	LVR-IC	LDO, 0.85V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H59	-	XC6220B09BPR	LVR-IC	LDO, 0.95V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5A	-	XC6220B10BPR	LVR-IC	LDO, 1.05V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5B	-	XC6220B11BPR	LVR-IC	LDO, 1.15V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5C	-	XC6220B12BPR	LVR-IC	LDO, 1.25V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5D	-	XC6220B13BPR	LVR-IC	LDO, 1.35V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5E	-	XC6220B14BPR	LVR-IC	LDO, 1.45V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5F	-	XC6220B15BPR	LVR-IC	LDO, 1.55V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5H	-	XC6220B16BPR	LVR-IC	LDO, 1.65V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5K	-	XC6220B17BPR	LVR-IC	LDO, 1.75V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5L	-	XC6220B18BPR	LVR-IC	LDO, 1.85V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5M	-	XC6220B19BPR	LVR-IC	LDO, 1.95V±20mV, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5N	-	XC6220B20BPR	LVR-IC	LDO, 2.05V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5P	-	XC6220B21BPR	LVR-IC	LDO, 2.15V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5R	-	XC6220B22BPR	LVR-IC	LDO, 2.25V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5S	-	XC6220B23BPR	LVR-IC	LDO, 2.35V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5T	-	XC6220B24BPR	LVR-IC	LDO, 2.45V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5U	-	XC6220B25BPR	LVR-IC	LDO, 2.55V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5V	-	XC6220B26BPR	LVR-IC	LDO, 2.65V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5X	-	XC6220B27BPR	LVR-IC	LDO, 2.75V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5Y	-	XC6220B28BPR	LVR-IC	LDO, 2.85V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H5Z	-	XC6220B29BPR	LVR-IC	LDO, 2.95V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H6	-	ELM89363A	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H60	-	XC6220B301PR	LVR-IC	LDO, 3.0V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H61	-	XC6220B311PR	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H62	-	XC6220B321PR	LVR-IC	LDO, 3.2V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H63	-	XC6220B331PR	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H64	-	XC6220B341PR	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H65	-	XC6220B351PR	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H66	-	XC6220B361PR	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H67	-	XC6220B371PR	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H68	-	XC6220B381PR	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H69	-	XC6220B391PR	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H6A	-	XC6220B401PR	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H6B	-	XC6220B411PR	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H6C	-	XC6220B421PR	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H6D	-	XC6220B431PR	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H6E	-	XC6220B441PR	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H6F	-	XC6220B451PR	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H6H	-	XC6220B461PR	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H6K	-	XC6220B471PR	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H6L	-	XC6220B481PR	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H6M	-	XC6220B491PR	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H6N	-	XC6220B501PR	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H7	-	ELM89373A	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
H70	-	XC6220B30BPR	LVR-IC	LDO, 3.05V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H71	-	XC6220B31BPR	LVR-IC	LDO, 3.15V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H72	-	XC6220B32BPR	LVR-IC	LDO, 3.25V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H73	-	XC6220B33BPR	LVR-IC	LDO, 3.35V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H74	-	XC6220B34BPR	LVR-IC	LDO, 3.45V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H75	-	XC6220B35BPR	LVR-IC	LDO, 3.55V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H76	-	XC6220B36BPR	LVR-IC	LDO, 3.65V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H77	-	XC6220B37BPR	LVR-IC	LDO, 3.75V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H78	-	XC6220B38BPR	LVR-IC	LDO, 3.85V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H79	-	XC6220B39BPR	LVR-IC	LDO, 3.95V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H7A	-	XC6220B40BPR	LVR-IC	LDO, 4.05V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H7B	-	XC6220B41BPR	LVR-IC	LDO, 4.15V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H7C	-	XC6220B42BPR	LVR-IC	LDO, 4.25V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H7D	-	XC6220B43BPR	LVR-IC	LDO, 4.35V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H7E	-	XC6220B44BPR	LVR-IC	LDO, 4.45V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H7F	-	XC6220B45BPR	LVR-IC	LDO, 4.55V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H7H	-	XC6220B46BPR	LVR-IC	LDO, 4.65V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H7K	-	XC6220B47BPR	LVR-IC	LDO, 4.75V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H7L	-	XC6220B48BPR	LVR-IC	LDO, 4.85V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H7M	-	XC6220B49BPR	LVR-IC	LDO, 4.95V±1%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
H8	-	ELM89383A	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
H88	-	XC6220C081PR	LVR-IC	LDO, 0.8V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H89	-	XC6220C091PR	LVR-IC	LDO, 0.9V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8A	-	XC6220C101PR	LVR-IC	LDO, 1.0V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8B	-	XC6220C111PR	LVR-IC	LDO, 1.1V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8C	-	XC6220C121PR	LVR-IC	LDO, 1.2V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8D	-	XC6220C131PR	LVR-IC	LDO, 1.3V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8E	-	XC6220C141PR	LVR-IC	LDO, 1.4V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8F	-	XC6220C151PR	LVR-IC	LDO, 1.5V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8H	-	XC6220C161PR	LVR-IC	LDO, 1.6V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8K	-	XC6220C171PR	LVR-IC	LDO, 1.7V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8L	-	XC6220C181PR	LVR-IC	LDO, 1.8V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8M	-	XC6220C191PR	LVR-IC	LDO, 1.9V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8N	-	XC6220C201PR	LVR-IC	LDO, 2.0V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8P	-	XC6220C211PR	LVR-IC	LDO, 2.1V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8R	-	XC6220C221PR	LVR-IC	LDO, 2.2V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8S	-	XC6220C231PR	LVR-IC	LDO, 2.3V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8T	-	XC6220C241PR	LVR-IC	LDO, 2.4V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8U	-	XC6220C251PR	LVR-IC	LDO, 2.5V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8V	-	XC6220C261PR	LVR-IC	LDO, 2.6V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8X	-	XC6220C271PR	LVR-IC	LDO, 2.7V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8Y	-	XC6220C281PR	LVR-IC	LDO, 2.8V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H8Z	-	XC6220C291PR	LVR-IC	LDO, 2.9V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9	-	ELM89393A	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
H98	-	XC6220C08BPR	LVR-IC	LDO, 0.85V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H99	-	XC6220C09BPR	LVR-IC	LDO, 0.95V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9A	-	XC6220C10BPR	LVR-IC	LDO, 1.05V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9B	-	XC6220C11BPR	LVR-IC	LDO, 1.15V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H9C	-	XC6220C12BPR	LVR-IC	LDO, 1.25V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9D	-	XC6220C13BPR	LVR-IC	LDO, 1.35V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9E	-	XC6220C14BPR	LVR-IC	LDO, 1.45V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9F	-	XC6220C15BPR	LVR-IC	LDO, 1.55V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9H	-	XC6220C16BPR	LVR-IC	LDO, 1.65V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9K	-	XC6220C17BPR	LVR-IC	LDO, 1.75V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9L	-	XC6220C18BPR	LVR-IC	LDO, 1.85V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9M	-	XC6220C19BPR	LVR-IC	LDO, 1.95V±20mV, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9N	-	XC6220C20BPR	LVR-IC	LDO, 2.05V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9P	-	XC6220C21BPR	LVR-IC	LDO, 2.15V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9R	-	XC6220C22BPR	LVR-IC	LDO, 2.25V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9S	-	XC6220C23BPR	LVR-IC	LDO, 2.35V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9T	-	XC6220C24BPR	LVR-IC	LDO, 2.45V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9U	-	XC6220C25BPR	LVR-IC	LDO, 2.55V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9V	-	XC6220C26BPR	LVR-IC	LDO, 2.65V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9X	-	XC6220C27BPR	LVR-IC	LDO, 2.75V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9Y	-	XC6220C28BPR	LVR-IC	LDO, 2.85V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
H9Z	-	XC6220C29BPR	LVR-IC	LDO, 2.95V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HA	-	ELM99402B	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
HA0	-	XC6220C301PR	LVR-IC	LDO, 3.0V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HA1	-	XC6220C311PR	LVR-IC	LDO, 3.1V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HA2	-	XC6220C321PR	LVR-IC	LDO, 3.2V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HA3	-	XC6220C331PR	LVR-IC	LDO, 3.3V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HA4	-	XC6220C341PR	LVR-IC	LDO, 3.4V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HA5	-	XC6220C351PR	LVR-IC	LDO, 3.5V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HA6	-	XC6220C361PR	LVR-IC	LDO, 3.6V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HA7	-	XC6220C371PR	LVR-IC	LDO, 3.7V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HA8	-	XC6220C381PR	LVR-IC	LDO, 3.8V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HA9	-	XC6220C391PR	LVR-IC	LDO, 3.9V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HAA	-	XC6220C401PR	LVR-IC	LDO, 4.0V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HAB	-	XC6220C411PR	LVR-IC	LDO, 4.1V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HAC	-	XC6220C421PR	LVR-IC	LDO, 4.2V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HAD	-	XC6220C431PR	LVR-IC	LDO, 4.3V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HAE	-	XC6220C441PR	LVR-IC	LDO, 4.4V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HAF	-	XC6220C451PR	LVR-IC	LDO, 4.5V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HAH	-	XC6220C461PR	LVR-IC	LDO, 4.6V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HAK	-	XC6220C471PR	LVR-IC	LDO, 4.7V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HAL	-	XC6220C481PR	LVR-IC	LDO, 4.8V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HAM	-	XC6220C491PR	LVR-IC	LDO, 4.9V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HAN	-	XC6220C501PR	LVR-IC	LDO, 5.0V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HB	-	ELM99412B	LVR-IC	LDO, 4.1V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
HB0	-	XC6220C30BPR	LVR-IC	LDO, 3.05V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HB1	-	XC6220C31BPR	LVR-IC	LDO, 3.15V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HB2	-	XC6220C32BPR	LVR-IC	LDO, 3.25V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HB3	-	XC6220C33BPR	LVR-IC	LDO, 3.35V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HB4	-	XC6220C34BPR	LVR-IC	LDO, 3.45V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HB5	-	XC6220C35BPR	LVR-IC	LDO, 3.55V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HB6	-	XC6220C36BPR	LVR-IC	LDO, 3.65V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HB7	-	XC6220C37BPR	LVR-IC	LDO, 3.75V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HB8	-	XC6220C38BPR	LVR-IC	LDO, 3.85V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HB9	-	XC6220C39BPR	LVR-IC	LDO, 3.95V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HBA	-	XC6220C40BPR	LVR-IC	LDO, 4.05V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HBB	-	XC6220C41BPR	LVR-IC	LDO, 4.15V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HBC	-	XC6220C42BPR	LVR-IC	LDO, 4.25V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HBD	-	XC6220C43BPR	LVR-IC	LDO, 4.35V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HBE	-	XC6220C44BPR	LVR-IC	LDO, 4.45V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HBF	-	XC6220C45BPR	LVR-IC	LDO, 4.55V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HBH	-	XC6220C46BPR	LVR-IC	LDO, 4.65V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HBK	-	XC6220C47BPR	LVR-IC	LDO, 4.75V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HBL	-	XC6220C48BPR	LVR-IC	LDO, 4.85V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HBM	-	XC6220C49BPR	LVR-IC	LDO, 4.95V±1%, 1A, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
HC	-	ELM99422B	LVR-IC	LDO, 4.2V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
HC8	-	XC6220D081PR	LVR-IC	LDO, 0.8V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HC9	-	XC6220D091PR	LVR-IC	LDO, 0.9V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCA	-	XC6220D101PR	LVR-IC	LDO, 1.0V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCB	-	XC6220D111PR	LVR-IC	LDO, 1.1V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCC	-	XC6220D121PR	LVR-IC	LDO, 1.2V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCD	-	XC6220D131PR	LVR-IC	LDO, 1.3V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCE	-	XC6220D141PR	LVR-IC	LDO, 1.4V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCF	-	XC6220D151PR	LVR-IC	LDO, 1.5V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HCH	-	XC6220D161PR	LVR-IC	LDO, 1.6V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCK	-	XC6220D171PR	LVR-IC	LDO, 1.7V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCL	-	XC6220D181PR	LVR-IC	LDO, 1.8V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCM	-	XC6220D191PR	LVR-IC	LDO, 1.9V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCN	-	XC6220D201PR	LVR-IC	LDO, 2.0V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCP	-	XC6220D211PR	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCR	-	XC6220D221PR	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCS	-	XC6220D231PR	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCT	-	XC6220D241PR	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCU	-	XC6220D251PR	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCV	-	XC6220D261PR	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCX	-	XC6220D271PR	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCY	-	XC6220D281PR	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HCZ	-	XC6220D291PR	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HD	-	ELM99432B	LVR-IC	LDO, 4.3V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
HD8	-	XC6220D08BPR	LVR-IC	LDO, 0.85V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HD9	-	XC6220D09BPR	LVR-IC	LDO, 0.95V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDA	-	XC6220D10BPR	LVR-IC	LDO, 1.05V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDB	-	XC6220D11BPR	LVR-IC	LDO, 1.15V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDC	-	XC6220D12BPR	LVR-IC	LDO, 1.25V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDD	-	XC6220D13BPR	LVR-IC	LDO, 1.35V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDE	-	XC6220D14BPR	LVR-IC	LDO, 1.45V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDF	-	XC6220D15BPR	LVR-IC	LDO, 1.55V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDH	-	XC6220D16BPR	LVR-IC	LDO, 1.65V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDK	-	XC6220D17BPR	LVR-IC	LDO, 1.75V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDL	-	XC6220D18BPR	LVR-IC	LDO, 1.85V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDM	-	XC6220D19BPR	LVR-IC	LDO, 1.95V±20mV, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDN	-	XC6220D20BPR	LVR-IC	LDO, 2.05V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDP	-	XC6220D21BPR	LVR-IC	LDO, 2.15V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDR	-	XC6220D22BPR	LVR-IC	LDO, 2.25V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDS	-	XC6220D23BPR	LVR-IC	LDO, 2.35V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDT	-	XC6220D24BPR	LVR-IC	LDO, 2.45V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDU	-	XC6220D25BPR	LVR-IC	LDO, 2.55V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDV	-	XC6220D26BPR	LVR-IC	LDO, 2.65V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDX	-	XC6220D27BPR	LVR-IC	LDO, 2.75V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDY	-	XC6220D28BPR	LVR-IC	LDO, 2.85V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HDZ	-	XC6220D29BPR	LVR-IC	LDO, 2.95V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HE	-	ELM99442B	LVR-IC	LDO, 4.4V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
HE0	-	XC6220D301PR	LVR-IC	LDO, 3.0V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HE1	-	XC6220D311PR	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HE2	-	XC6220D321PR	LVR-IC	LDO, 3.2V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HE3	-	XC6220D331PR	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HE4	-	XC6220D341PR	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HE5	-	XC6220D351PR	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HE6	-	XC6220D361PR	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HE7	-	XC6220D371PR	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HE8	-	XC6220D381PR	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HE9	-	XC6220D391PR	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HEA	-	XC6220D401PR	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HEB	-	XC6220D411PR	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HEC	-	XC6220D421PR	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HED	-	XC6220D431PR	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HEE	-	XC6220D441PR	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HEF	-	XC6220D451PR	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HEH	-	XC6220D461PR	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HEK	-	XC6220D471PR	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HEL	-	XC6220D481PR	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HEM	-	XC6220D491PR	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HEN	-	XC6220D501PR	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HF	-	ELM99452B	LVR-IC	LDO, 4.5V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
HF0	-	XC6220D30BPR	LVR-IC	LDO, 3.05V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HF1	-	XC6220D31BPR	LVR-IC	LDO, 3.15V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HF2	-	XC6220D32BPR	LVR-IC	LDO, 3.25V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HF3	-	XC6220D33BPR	LVR-IC	LDO, 3.35V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HF4	-	XC6220D34BPR	LVR-IC	LDO, 3.45V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HF5	-	XC6220D35BPR	LVR-IC	LDO, 3.55V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HF6	-	XC6220D36BPR	LVR-IC	LDO, 3.65V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HF7	-	XC6220D37BPR	LVR-IC	LDO, 3.75V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HF8	-	XC6220D38BPR	LVR-IC	LDO, 3.85V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HF9	-	XC6220D39BPR	LVR-IC	LDO, 3.95V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HFA	-	XC6220D40BPR	LVR-IC	LDO, 4.05V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HFB	-	XC6220D41BPR	LVR-IC	LDO, 4.15V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HFC	-	XC6220D42BPR	LVR-IC	LDO, 4.25V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HFD	-	XC6220D43BPR	LVR-IC	LDO, 4.35V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HFE	-	XC6220D44BPR	LVR-IC	LDO, 4.45V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HFF	-	XC6220D45BPR	LVR-IC	LDO, 4.55V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HFH	-	XC6220D46BPR	LVR-IC	LDO, 4.65V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HFK	-	XC6220D47BPR	LVR-IC	LDO, 4.75V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HFL	-	XC6220D48BPR	LVR-IC	LDO, 4.85V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HFM	-	XC6220D49BPR	LVR-IC	LDO, 4.95V±1%, 1A, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
HG	-	ELM99462B	LVR-IC	LDO, 4.6V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
HH	-	ELM99472B	LVR-IC	LDO, 4.7V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
HJ	-	ELM99482B	LVR-IC	LDO, 4.8V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
HK	-	ELM99492B	LVR-IC	LDO, 4.9V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
J0	-	ELM89403A	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-89-5	32gw	VR4	6n	Elm
J01A	-	R1172H181A5	LVR-IC	LDO, 1.85V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J01B	-	R1172H181B5	LVR-IC	LDO, 1.85V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J01D	-	R1172H181D5	LVR-IC	LDO, 1.85V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J02A	-	R1172H281A5	LVR-IC	LDO, 2.85V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J02B	-	R1172H281B5	LVR-IC	LDO, 2.85V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J02D	-	R1172H281D5	LVR-IC	LDO, 2.85V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J08A	-	R1172H081A	LVR-IC	LDO, 0.8V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J08B	-	R1172H081B	LVR-IC	LDO, 0.8V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J08D	-	R1172H081D	LVR-IC	LDO, 0.8V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J09A	-	R1172H091A	LVR-IC	LDO, 0.9V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J09B	-	R1172H091B	LVR-IC	LDO, 0.9V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J09D	-	R1172H091D	LVR-IC	LDO, 0.9V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J10A	-	R1172H101A	LVR-IC	LDO, 1.0V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J10B	-	R1172H101B	LVR-IC	LDO, 1.0V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J10D	-	R1172H101D	LVR-IC	LDO, 1.0V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J11A	-	R1172H111A	LVR-IC	LDO, 1.1V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J11B	-	R1172H111B	LVR-IC	LDO, 1.1V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J11D	-	R1172H111D	LVR-IC	LDO, 1.1V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J12A	-	R1172H121A	LVR-IC	LDO, 1.2V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J12B	-	R1172H121B	LVR-IC	LDO, 1.2V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J12D	-	R1172H121D	LVR-IC	LDO, 1.2V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J13A	-	R1172H131A	LVR-IC	LDO, 1.3V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J13B	-	R1172H131B	LVR-IC	LDO, 1.3V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J13D	-	R1172H131D	LVR-IC	LDO, 1.3V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J14A	-	R1172H141A	LVR-IC	LDO, 1.4V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J14B	-	R1172H141B	LVR-IC	LDO, 1.4V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J14D	-	R1172H141D	LVR-IC	LDO, 1.4V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J15A	-	R1172H151A	LVR-IC	LDO, 1.5V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J15B	-	R1172H151B	LVR-IC	LDO, 1.5V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J15D	-	R1172H151D	LVR-IC	LDO, 1.5V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J16A	-	R1172H161A	LVR-IC	LDO, 1.6V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J16B	-	R1172H161B	LVR-IC	LDO, 1.6V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J16D	-	R1172H161D	LVR-IC	LDO, 1.6V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J17A	-	R1172H171A	LVR-IC	LDO, 1.7V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J17B	-	R1172H171B	LVR-IC	LDO, 1.7V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J17D	-	R1172H171D	LVR-IC	LDO, 1.7V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J18A	-	R1172H181A	LVR-IC	LDO, 1.8V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J18B	-	R1172H181B	LVR-IC	LDO, 1.8V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J18D	-	R1172H181D	LVR-IC	LDO, 1.8V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J19A	-	R1172H191A	LVR-IC	LDO, 1.9V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J19B	-	R1172H191B	LVR-IC	LDO, 1.9V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J19D	-	R1172H191D	LVR-IC	LDO, 1.9V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J20A	-	R1172H201A	LVR-IC	LDO, 2.0V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J20B	-	R1172H201B	LVR-IC	LDO, 2.0V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J20D	-	R1172H201D	LVR-IC	LDO, 2.0V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J21A	-	R1172H211A	LVR-IC	LDO, 2.1V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J21B	-	R1172H211B	LVR-IC	LDO, 2.1V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J21D	-	R1172H211D	LVR-IC	LDO, 2.1V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J22A	-	R1172H221A	LVR-IC	LDO, 2.2V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J22B	-	R1172H221B	LVR-IC	LDO, 2.2V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J22D	-	R1172H221D	LVR-IC	LDO, 2.2V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J23A	-	R1172H231A	LVR-IC	LDO, 2.3V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J23B	-	R1172H231B	LVR-IC	LDO, 2.3V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J23D	-	R1172H231D	LVR-IC	LDO, 2.3V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J24A	-	R1172H241A	LVR-IC	LDO, 2.4V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J24B	-	R1172H241B	LVR-IC	LDO, 2.4V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J24D	-	R1172H241D	LVR-IC	LDO, 2.4V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J25A	-	R1172H251A	LVR-IC	LDO, 2.5V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J25B	-	R1172H251B	LVR-IC	LDO, 2.5V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J25D	-	R1172H251D	LVR-IC	LDO, 2.5V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J26A	-	R1172H261A	LVR-IC	LDO, 2.6V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J26B	-	R1172H261B	LVR-IC	LDO, 2.6V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J26D	-	R1172H261D	LVR-IC	LDO, 2.6V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J27A	-	R1172H271A	LVR-IC	LDO, 2.7V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J27B	-	R1172H271B	LVR-IC	LDO, 2.7V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J27D	-	R1172H271D	LVR-IC	LDO, 2.7V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J28A	-	R1172H281A	LVR-IC	LDO, 2.8V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J28B	-	R1172H281B	LVR-IC	LDO, 2.8V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J28D	-	R1172H281D	LVR-IC	LDO, 2.8V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J29A	-	R1172H291A	LVR-IC	LDO, 2.9V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J29B	-	R1172H291B	LVR-IC	LDO, 2.9V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J29D	-	R1172H291D	LVR-IC	LDO, 2.9V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J30A	-	R1172H301A	LVR-IC	LDO, 3.0V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J30B	-	R1172H301B	LVR-IC	LDO, 3.0V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J30D	-	R1172H301D	LVR-IC	LDO, 3.0V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J31A	-	R1172H311A	LVR-IC	LDO, 3.1V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J31B	-	R1172H311B	LVR-IC	LDO, 3.1V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J31D	-	R1172H311D	LVR-IC	LDO, 3.1V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J32A	-	R1172H321A	LVR-IC	LDO, 3.2V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J32B	-	R1172H321B	LVR-IC	LDO, 3.2V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J32D	-	R1172H321D	LVR-IC	LDO, 3.2V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J33A	-	R1172H331A	LVR-IC	LDO, 3.3V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J33B	-	R1172H331B	LVR-IC	LDO, 3.3V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J33D	-	R1172H331D	LVR-IC	LDO, 3.3V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J34A	-	R1172H341A	LVR-IC	LDO, 3.4V±2%, 1A, -CE, -CE	SOT-89-5	32vy	VR4	6h	Ric
J34B	-	R1172H341B	LVR-IC	LDO, 3.4V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J34D	-	R1172H341D	LVR-IC	LDO, 3.4V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J35A	-	R1172H351A	LVR-IC	LDO, 3.5V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J35B	-	R1172H351B	LVR-IC	LDO, 3.5V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J35D	-	R1172H351D	LVR-IC	LDO, 3.5V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J36A	-	R1172H361A	LVR-IC	LDO, 3.6V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J36B	-	R1172H361B	LVR-IC	LDO, 3.6V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J36D	-	R1172H361D	LVR-IC	LDO, 3.6V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J37A	-	R1172H371A	LVR-IC	LDO, 3.7V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J37B	-	R1172H371B	LVR-IC	LDO, 3.7V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J37D	-	R1172H371D	LVR-IC	LDO, 3.7V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J38A	-	R1172H381A	LVR-IC	LDO, 3.8V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J38B	-	R1172H381B	LVR-IC	LDO, 3.8V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J38D	-	R1172H381D	LVR-IC	LDO, 3.8V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J39A	-	R1172H391A	LVR-IC	LDO, 3.9V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J39B	-	R1172H391B	LVR-IC	LDO, 3.9V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J39D	-	R1172H391D	LVR-IC	LDO, 3.9V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J40A	-	R1172H401A	LVR-IC	LDO, 4.0V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J40B	-	R1172H401B	LVR-IC	LDO, 4.0V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J40D	-	R1172H401D	LVR-IC	LDO, 4.0V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J41A	-	R1172H411A	LVR-IC	LDO, 4.1V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J41B	-	R1172H411B	LVR-IC	LDO, 4.1V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J41D	-	R1172H411D	LVR-IC	LDO, 4.1V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J42A	-	R1172H421A	LVR-IC	LDO, 4.2V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J42B	-	R1172H421B	LVR-IC	LDO, 4.2V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J42D	-	R1172H421D	LVR-IC	LDO, 4.2V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J43A	-	R1172H431A	LVR-IC	LDO, 4.3V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J43B	-	R1172H431B	LVR-IC	LDO, 4.3V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J43D	-	R1172H431D	LVR-IC	LDO, 4.3V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J44A	-	R1172H441A	LVR-IC	LDO, 4.4V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J44B	-	R1172H441B	LVR-IC	LDO, 4.4V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J44D	-	R1172H441D	LVR-IC	LDO, 4.4V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J45A	-	R1172H451A	LVR-IC	LDO, 4.5V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J45B	-	R1172H451B	LVR-IC	LDO, 4.5V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J45D	-	R1172H451D	LVR-IC	LDO, 4.5V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J46A	-	R1172H461A	LVR-IC	LDO, 4.6V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J46B	-	R1172H461B	LVR-IC	LDO, 4.6V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J46D	-	R1172H461D	LVR-IC	LDO, 4.6V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J47A	-	R1172H471A	LVR-IC	LDO, 4.7V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J47B	-	R1172H471B	LVR-IC	LDO, 4.7V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J47D	-	R1172H471D	LVR-IC	LDO, 4.7V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J48A	-	R1172H481A	LVR-IC	LDO, 4.8V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J48B	-	R1172H481B	LVR-IC	LDO, 4.8V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J48D	-	R1172H481D	LVR-IC	LDO, 4.8V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J49A	-	R1172H491A	LVR-IC	LDO, 4.9V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J49B	-	R1172H491B	LVR-IC	LDO, 4.9V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J49D	-	R1172H491D	LVR-IC	LDO, 4.9V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
J50A	-	R1172H501A	LVR-IC	LDO, 5.0V±2%, 1A, -CE	SOT-89-5	32vy	VR4	6h	Ric
J50B	-	R1172H501B	LVR-IC	LDO, 5.0V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6h	Ric
J50D	-	R1172H501D	LVR-IC	LDO, 5.0V±2%, 1A, +CE, CL	SOT-89-5	32vy	VR4	6h	Ric
JA	-	ELM99502B	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
JA12	-	BL8591CC5TR12	LVR-IC	LDO, 1.2V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA13	-	BL8591CC5TR13	LVR-IC	LDO, 1.3V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA14	-	BL8591CC5TR14	LVR-IC	LDO, 1.4V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA15	-	BL8591CC5TR15	LVR-IC	LDO, 1.5V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA16	-	BL8591CC5TR16	LVR-IC	LDO, 1.6V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA17	-	BL8591CC5TR17	LVR-IC	LDO, 1.7V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA18	-	BL8591CC5TR18	LVR-IC	LDO, 1.8V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA19	-	BL8591CC5TR19	LVR-IC	LDO, 1.9V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA20	-	BL8591CC5TR20	LVR-IC	LDO, 2.0V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA21	-	BL8591CC5TR21	LVR-IC	LDO, 2.1V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA22	-	BL8591CC5TR22	LVR-IC	LDO, 2.2V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA23	-	BL8591CC5TR23	LVR-IC	LDO, 2.3V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA24	-	BL8591CC5TR24	LVR-IC	LDO, 2.4V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA25	-	BL8591CC5TR25	LVR-IC	LDO, 2.5V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA26	-	BL8591CC5TR26	LVR-IC	LDO, 2.6V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA27	-	BL8591CC5TR27	LVR-IC	LDO, 2.7V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA28	-	BL8591CC5TR28	LVR-IC	LDO, 2.8V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA29	-	BL8591CC5TR29	LVR-IC	LDO, 2.9V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA30	-	BL8591CC5TR30	LVR-IC	LDO, 3.0V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA31	-	BL8591CC5TR31	LVR-IC	LDO, 3.1V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA32	-	BL8591CC5TR32	LVR-IC	LDO, 3.2V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA33	-	BL8591CC5TR33	LVR-IC	LDO, 3.3V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA34	-	BL8591CC5TR34	LVR-IC	LDO, 3.4V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA35	-	BL8591CC5TR35	LVR-IC	LDO, 3.5V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA36	-	BL8591CC5TR36	LVR-IC	LDO, 3.6V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA37	-	BL8591CC5TR37	LVR-IC	LDO, 3.7V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA38	-	BL8591CC5TR38	LVR-IC	LDO, 3.8V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA39	-	BL8591CC5TR39	LVR-IC	LDO, 3.9V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA40	-	BL8591CC5TR40	LVR-IC	LDO, 4.0V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA41	-	BL8591CC5TR41	LVR-IC	LDO, 4.1V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA42	-	BL8591CC5TR42	LVR-IC	LDO, 4.2V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA43	-	BL8591CC5TR43	LVR-IC	LDO, 4.3V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA44	-	BL8591CC5TR44	LVR-IC	LDO, 4.4V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JA45	-	BL8591CC5TR45	LVR-IC	LDO, 4.5V±2%, 100mA, +CE	SOT-89-5	32um	VR4	6ja	Shb
JB	-	ELM99512B	LVR-IC	LDO, 5.1V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
JC	-	ELM99522B	LVR-IC	LDO, 5.2V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
JD	-	ELM99532B	LVR-IC	LDO, 5.3V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
JE	-	ELM99542B	LVR-IC	LDO, 5.4V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
JF	-	AP1119-15	LVR-IC	LDO, 1.5V±2%, 500mA, -CE	SOT-89-5	32sb	VR4	6j	Ana
JF	-	ELM99552B	LVR-IC	LDO, 5.5V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
JG	-	AP1119-18	LVR-IC	LDO, 1.8V±2%, 500mA, -CE	SOT-89-5	32sb	VR4	6j	Ana
JG	-	ELM99562B	LVR-IC	LDO, 5.6V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
JH	-	AP1119-25	LVR-IC	LDO, 2.5V±2%, 500mA, -CE	SOT-89-5	32sb	VR4	6j	Ana
JH	-	ELM99572B	LVR-IC	LDO, 5.7V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
JI	-	AP1119-33	LVR-IC	LDO, 3.3V±2%, 500mA, -CE	SOT-89-5	32sb	VR4	6j	Ana
JJ	-	AP1119-50	LVR-IC	LDO, 5.0V±2%, 500mA, -CE	SOT-89-5	32sb	VR4	6j	Ana
JJ	-	ELM99582B	LVR-IC	LDO, 5.8V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
JK	-	AP1119-90	LVR-IC	LDO, 9V±2%, 500mA, -CE	SOT-89-5	32sb	VR4	6j	Ana
JK	-	ELM99592B	LVR-IC	LDO, 5.9V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
JL	-	AP1119-12	LVR-IC	LDO, 12V±2%, 500mA, -CE	SOT-89-5	32sb	VR4	6j	Ana
KA	-	ELM99602B	LVR-IC	LDO, 6.0V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
L00B	-	R1173H001B	LVR-IC	LDO, Adjustable, 1A, +CE	SOT-89-5	32vri	VR5	6h	Ric
L00D	-	R1173H001D	LVR-IC	LDO, Adjustable, 1A, +CE, CL	SOT-89-5	32vri	VR5	6h	Ric
L01B	-	R1173H181B5	LVR-IC	LDO, 1.85V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L01D	-	R1173H181D5	LVR-IC	LDO, 1.85V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L02B	-	R1173H281B5	LVR-IC	LDO, 2.85V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L02D	-	R1173H281D5	LVR-IC	LDO, 2.85V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L08B	-	R1173H081B	LVR-IC	LDO, 0.8V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L08D	-	R1173H081D	LVR-IC	LDO, 0.8V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L09B	-	R1173H091B	LVR-IC	LDO, 0.9V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L09D	-	R1173H091D	LVR-IC	LDO, 0.9V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L10B	-	R1173H101B	LVR-IC	LDO, 1.0V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L10D	-	R1173H101D	LVR-IC	LDO, 1.0V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L11B	-	R1173H111B	LVR-IC	LDO, 1.1V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L11D	-	R1173H111D	LVR-IC	LDO, 1.1V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L12B	-	R1173H121B	LVR-IC	LDO, 1.2V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L12D	-	R1173H121D	LVR-IC	LDO, 1.2V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L13B	-	R1173H131B	LVR-IC	LDO, 1.3V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L13D	-	R1173H131D	LVR-IC	LDO, 1.3V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L14B	-	R1173H141B	LVR-IC	LDO, 1.4V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L14D	-	R1173H141D	LVR-IC	LDO, 1.4V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L15B	-	R1173H151B	LVR-IC	LDO, 1.5V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L15D	-	R1173H151D	LVR-IC	LDO, 1.5V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L16B	-	R1173H161B	LVR-IC	LDO, 1.6V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L16D	-	R1173H161D	LVR-IC	LDO, 1.6V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L17B	-	R1173H171B	LVR-IC	LDO, 1.7V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L17D	-	R1173H171D	LVR-IC	LDO, 1.7V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L18B	-	R1173H181B	LVR-IC	LDO, 1.8V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L18D	-	R1173H181D	LVR-IC	LDO, 1.8V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L19B	-	R1173H191B	LVR-IC	LDO, 1.9V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L19D	-	R1173H191D	LVR-IC	LDO, 1.9V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L20	kb	XC6382C201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L20	ke	XC6385C201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L20B	-	R1173H201B	LVR-IC	LDO, 2.0V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L20D	-	R1173H201D	LVR-IC	LDO, 2.0V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L21	kb	XC6382C211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L21	ke	XC6385C211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L21B	-	R1173H211B	LVR-IC	LDO, 2.1V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L21D	-	R1173H211D	LVR-IC	LDO, 2.1V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L22	kb	XC6382C221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L22	ke	XC6385C221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L22B	-	R1173H221B	LVR-IC	LDO, 2.2V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L22D	-	R1173H221D	LVR-IC	LDO, 2.2V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L23	kb	XC6382C231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L23	ke	XC6385C231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L23B	-	R1173H231B	LVR-IC	LDO, 2.3V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L23D	-	R1173H231D	LVR-IC	LDO, 2.3V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L24	kb	XC6382C241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L24	ke	XC6385C241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L24B	-	R1173H241B	LVR-IC	LDO, 2.4V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L24D	-	R1173H241D	LVR-IC	LDO, 2.4V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L25	kb	XC6382C251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L25	ke	XC6385C251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L25B	-	R1173H251B	LVR-IC	LDO, 2.5V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L25D	-	R1173H251D	LVR-IC	LDO, 2.5V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L26	kb	XC6382C261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L26	ke	XC6385C261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L26B	-	R1173H261B	LVR-IC	LDO, 2.6V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L26D	-	R1173H261D	LVR-IC	LDO, 2.6V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L27	kb	XC6382C271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L27	ke	XC6385C271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L27B	-	R1173H271B	LVR-IC	LDO, 2.7V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L27D	-	R1173H271D	LVR-IC	LDO, 2.7V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L28	kb	XC6382C281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L28	ke	XC6385C281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L28B	-	R1173H281B	LVR-IC	LDO, 2.8V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L28D	-	R1173H281D	LVR-IC	LDO, 2.8V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L29	kb	XC6382C291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L29	ke	XC6385C291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L29B	-	R1173H291B	LVR-IC	LDO, 2.9V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L29D	-	R1173H291D	LVR-IC	LDO, 2.9V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L30	kb	XC6382C301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L30	ke	XC6385C301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L30B	-	R1173H301B	LVR-IC	LDO, 3.0V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L30D	-	R1173H301D	LVR-IC	LDO, 3.0V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L31	kb	XC6382C311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L31	ke	XC6385C311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L31B	-	R1173H311B	LVR-IC	LDO, 3.1V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L31D	-	R1173H311D	LVR-IC	LDO, 3.1V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L32	kb	XC6382C321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L32	ke	XC6385C321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L32B	-	R1173H321B	LVR-IC	LDO, 3.2V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L32D	-	R1173H321D	LVR-IC	LDO, 3.2V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L33	kb	XC6382C331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L33	ke	XC6385C331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L33B	-	R1173H331B	LVR-IC	LDO, 3.3V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L33D	-	R1173H331D	LVR-IC	LDO, 3.3V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L34	kb	XC6382C341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L34	ke	XC6385C341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L34B	-	R1173H341B	LVR-IC	LDO, 3.4V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L34D	-	R1173H341D	LVR-IC	LDO, 3.4V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L35	kb	XC6382C351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L35	ke	XC6385C351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L35B	-	R1173H351B	LVR-IC	LDO, 3.5V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L35D	-	R1173H351D	LVR-IC	LDO, 3.5V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L36	kb	XC6382C361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L36	ke	XC6385C361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L36B	-	R1173H361B	LVR-IC	LDO, 3.6V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L36D	-	R1173H361D	LVR-IC	LDO, 3.6V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L37	kb	XC6382C371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L37	ke	XC6385C371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L37B	-	R1173H371B	LVR-IC	LDO, 3.7V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L37D	-	R1173H371D	LVR-IC	LDO, 3.7V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L38	kb	XC6382C381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L38	ke	XC6385C381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L38B	-	R1173H381B	LVR-IC	LDO, 3.8V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L38D	-	R1173H381D	LVR-IC	LDO, 3.8V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L39	kb	XC6382C391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L39	ke	XC6385C391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L39B	-	R1173H391B	LVR-IC	LDO, 3.9V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L39D	-	R1173H391D	LVR-IC	LDO, 3.9V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L40	kb	XC6382C401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L40	ke	XC6385C401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L40B	-	R1173H401B	LVR-IC	LDO, 4.0V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L40D	-	R1173H401D	LVR-IC	LDO, 4.0V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L41	kb	XC6382C411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L41	ke	XC6385C411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L41B	-	R1173H411B	LVR-IC	LDO, 4.1V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L41D	-	R1173H411D	LVR-IC	LDO, 4.1V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L42	kb	XC6382C421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L42	ke	XC6385C421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L42B	-	R1173H421B	LVR-IC	LDO, 4.2V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L42D	-	R1173H421D	LVR-IC	LDO, 4.2V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L43	kb	XC6382C431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L43	ke	XC6385C431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L43B	-	R1173H431B	LVR-IC	LDO, 4.3V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L43D	-	R1173H431D	LVR-IC	LDO, 4.3V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L44	kb	XC6382C441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L44	ke	XC6385C441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L44B	-	R1173H441B	LVR-IC	LDO, 4.4V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L44D	-	R1173H441D	LVR-IC	LDO, 4.4V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L45	kb	XC6382C451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L45	ke	XC6385C451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L45B	-	R1173H451B	LVR-IC	LDO, 4.5V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L45D	-	R1173H451D	LVR-IC	LDO, 4.5V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L46	kb	XC6382C461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L46	ke	XC6385C461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L46B	-	R1173H461B	LVR-IC	LDO, 4.6V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L46D	-	R1173H461D	LVR-IC	LDO, 4.6V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L47	kb	XC6382C471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L47	ke	XC6385C471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L47B	-	R1173H471B	LVR-IC	LDO, 4.7V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L47D	-	R1173H471D	LVR-IC	LDO, 4.7V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L48	kb	XC6382C481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L48	ke	XC6385C481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L48B	-	R1173H481B	LVR-IC	LDO, 4.8V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L48D	-	R1173H481D	LVR-IC	LDO, 4.8V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L49	kb	XC6382C491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L49	ke	XC6385C491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L49B	-	R1173H491B	LVR-IC	LDO, 4.9V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L49D	-	R1173H491D	LVR-IC	LDO, 4.9V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L50	kb	XC6382C501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L50	ke	XC6385C501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L50B	-	R1173H501B	LVR-IC	LDO, 5.0V±2%, 1A, +CE	SOT-89-5	32um	VR4	6h	Ric
L50D	-	R1173H501D	LVR-IC	LDO, 5.0V±2%, 1A, +CE, CL	SOT-89-5	32um	VR4	6h	Ric
L51	kb	XC6382C511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L51	ke	XC6385C511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L52	kb	XC6382C521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L52	ke	XC6385C521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L53	kb	XC6382C531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L53	ke	XC6385C531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L54	kb	XC6382C541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L54	ke	XC6385C541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L55	kb	XC6382C551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L55	ke	XC6385C551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L56	kb	XC6382C561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L56	ke	XC6385C561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L57	kb	XC6382C571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L57	ke	XC6385C571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L58	kb	XC6382C581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L58	ke	XC6385C581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L59	kb	XC6382C591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L59	ke	XC6385C591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L60	kb	XC6382C601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L60	ke	XC6385C601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L61	kb	XC6382C611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L61	ke	XC6385C611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L62	kb	XC6382C621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L62	ke	XC6385C621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L63	kb	XC6382C631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L63	ke	XC6385C631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L64	kb	XC6382C641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L64	ke	XC6385C641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L65	kb	XC6382C651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L65	ke	XC6385C651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L66	kb	XC6382C661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L66	ke	XC6385C661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L67	kb	XC6382C671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L67	ke	XC6385C671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L68	kb	XC6382C681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L68	ke	XC6385C681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L69	kb	XC6382C691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L69	ke	XC6385C691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L70	kb	XC6382C701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
L70	ke	XC6385C701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
LA	-	ELM99203B	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
LA0	-	XC6219A312PR	LVR-IC	LDO, 3.1V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LA1	-	XC6219A322PR	LVR-IC	LDO, 3.2V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LA2	-	XC6219A332PR	LVR-IC	LDO, 3.3V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LA3	-	XC6219A342PR	LVR-IC	LDO, 3.4V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LA4	-	XC6219A352PR	LVR-IC	LDO, 3.5V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LA5	-	XC6219A362PR	LVR-IC	LDO, 3.6V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LA6	-	XC6219A372PR	LVR-IC	LDO, 3.7V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LA7	-	XC6219A382PR	LVR-IC	LDO, 3.8V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LA8	-	XC6219A392PR	LVR-IC	LDO, 3.9V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LA9	-	XC6219A402PR	LVR-IC	LDO, 4.0V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LAA	-	XC6219A412PR	LVR-IC	LDO, 4.1V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LAB	-	XC6219A422PR	LVR-IC	LDO, 4.2V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LAC	-	XC6219A432PR	LVR-IC	LDO, 4.3V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LAD	-	XC6219A442PR	LVR-IC	LDO, 4.4V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LAE	-	XC6219A452PR	LVR-IC	LDO, 4.5V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LAF	-	XC6219A462PR	LVR-IC	LDO, 4.6V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LAH	-	XC6219A472PR	LVR-IC	LDO, 4.7V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LAK	-	XC6219A482PR	LVR-IC	LDO, 4.8V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LAL	-	XC6219A492PR	LVR-IC	LDO, 4.9V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LAM	-	XC6219A502PR	LVR-IC	LDO, 5.0V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LB	-	ELM99213B	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
LB0	-	XC6219B312PR	LVR-IC	LDO, 3.1V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LB1	-	XC6219B322PR	LVR-IC	LDO, 3.2V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LB2	-	XC6219B332PR	LVR-IC	LDO, 3.3V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LB3	-	XC6219B342PR	LVR-IC	LDO, 3.4V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LB4	-	XC6219B352PR	LVR-IC	LDO, 3.5V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LB5	-	XC6219B362PR	LVR-IC	LDO, 3.6V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LB6	-	XC6219B372PR	LVR-IC	LDO, 3.7V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LB7	-	XC6219B382PR	LVR-IC	LDO, 3.8V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LB8	-	XC6219B392PR	LVR-IC	LDO, 3.9V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LB9	-	XC6219B402PR	LVR-IC	LDO, 4.0V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LBA	-	XC6219B412PR	LVR-IC	LDO, 4.1V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LBB	-	XC6219B422PR	LVR-IC	LDO, 4.2V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LBC	-	XC6219B432PR	LVR-IC	LDO, 4.3V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LBD	-	XC6219B442PR	LVR-IC	LDO, 4.4V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LBE	-	XC6219B452PR	LVR-IC	LDO, 4.5V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LBF	-	XC6219B462PR	LVR-IC	LDO, 4.6V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LBH	-	XC6219B472PR	LVR-IC	LDO, 4.7V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LBK	-	XC6219B482PR	LVR-IC	LDO, 4.8V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LBL	-	XC6219B492PR	LVR-IC	LDO, 4.9V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LBM	-	XC6219B502PR	LVR-IC	LDO, 5.0V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LC	-	ELM99223B	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
LC0	-	XC6219C312PR	LVR-IC	LDO, 3.1V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LC1	-	XC6219C322PR	LVR-IC	LDO, 3.2V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LC2	-	XC6219C332PR	LVR-IC	LDO, 3.3V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LC3	-	XC6219C342PR	LVR-IC	LDO, 3.4V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LC4	-	XC6219C352PR	LVR-IC	LDO, 3.5V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LC5	-	XC6219C362PR	LVR-IC	LDO, 3.6V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LC6	-	XC6219C372PR	LVR-IC	LDO, 3.7V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LC7	-	XC6219C382PR	LVR-IC	LDO, 3.8V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LC8	-	XC6219C392PR	LVR-IC	LDO, 3.9V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LC9	-	XC6219C402PR	LVR-IC	LDO, 4.0V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LCA	-	XC6219C412PR	LVR-IC	LDO, 4.1V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LCB	-	XC6219C422PR	LVR-IC	LDO, 4.2V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LCC	-	XC6219C432PR	LVR-IC	LDO, 4.3V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LCD	-	XC6219C442PR	LVR-IC	LDO, 4.4V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LCE	-	XC6219C452PR	LVR-IC	LDO, 4.5V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LCF	-	XC6219C462PR	LVR-IC	LDO, 4.6V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LCH	-	XC6219C472PR	LVR-IC	LDO, 4.7V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LCK	-	XC6219C482PR	LVR-IC	LDO, 4.8V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LCL	-	XC6219C492PR	LVR-IC	LDO, 4.9V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LCM	-	XC6219C502PR	LVR-IC	LDO, 5.0V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LD	-	ELM99233B	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
LD0	-	XC6219D312PR	LVR-IC	LDO, 3.1V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LD1	-	XC6219D322PR	LVR-IC	LDO, 3.2V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LD2	-	XC6219D332PR	LVR-IC	LDO, 3.3V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LD3	-	XC6219D342PR	LVR-IC	LDO, 3.4V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LD4	-	XC6219D352PR	LVR-IC	LDO, 3.5V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LD5	-	XC6219D362PR	LVR-IC	LDO, 3.6V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LD6	-	XC6219D372PR	LVR-IC	LDO, 3.7V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LD7	-	XC6219D382PR	LVR-IC	LDO, 3.8V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LD8	-	XC6219D392PR	LVR-IC	LDO, 3.9V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LD9	-	XC6219D402PR	LVR-IC	LDO, 4.0V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LDA	-	XC6219D412PR	LVR-IC	LDO, 4.1V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LDB	-	XC6219D422PR	LVR-IC	LDO, 4.2V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LDC	-	XC6219D432PR	LVR-IC	LDO, 4.3V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LDD	-	XC6219D442PR	LVR-IC	LDO, 4.4V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LDE	-	XC6219D452PR	LVR-IC	LDO, 4.5V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LDF	-	XC6219D462PR	LVR-IC	LDO, 4.6V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LDH	-	XC6219D472PR	LVR-IC	LDO, 4.7V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LDK	-	XC6219D482PR	LVR-IC	LDO, 4.8V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LDL	-	XC6219D492PR	LVR-IC	LDO, 4.9V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LDM	-	XC6219D502PR	LVR-IC	LDO, 5.0V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LE	-	ELM99243B	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
LE8	-	XC6219A09APR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LE9	-	XC6219A10APR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LEA	-	XC6219A11APR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LEB	-	XC6219A12APR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LEC	-	XC6219A13APR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LED	-	XC6219A14APR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LEE	-	XC6219A15APR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LEF	-	XC6219A16APR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LEH	-	XC6219A17APR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LEK	-	XC6219A18APR	LVR-IC	LDO, 1.85V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LEL	-	XC6219A19APR	LVR-IC	LDO, 1.95V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LEM	-	XC6219A20APR	LVR-IC	LDO, 2.05V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LEN	-	XC6219A21APR	LVR-IC	LDO, 2.15V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LEP	-	XC6219A22APR	LVR-IC	LDO, 2.25V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LER	-	XC6219A23APR	LVR-IC	LDO, 2.35V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LES	-	XC6219A24APR	LVR-IC	LDO, 2.45V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LET	-	XC6219A25APR	LVR-IC	LDO, 2.55V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LEU	-	XC6219A26APR	LVR-IC	LDO, 2.65V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LEV	-	XC6219A27APR	LVR-IC	LDO, 2.75V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LEX	-	XC6219A28APR	LVR-IC	LDO, 2.85V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LEY	-	XC6219A29APR	LVR-IC	LDO, 2.95V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LEZ	-	XC6219A30APR	LVR-IC	LDO, 3.05V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LF	-	ELM99253B	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
LF8	-	XC6219B09APR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LF9	-	XC6219B10APR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFA	-	XC6219B11APR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFB	-	XC6219B12APR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFC	-	XC6219B13APR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFD	-	XC6219B14APR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFE	-	XC6219B15APR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFF	-	XC6219B16APR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFH	-	XC6219B17APR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFK	-	XC6219B18APR	LVR-IC	LDO, 1.85V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFL	-	XC6219B19APR	LVR-IC	LDO, 1.95V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFM	-	XC6219B20APR	LVR-IC	LDO, 2.05V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFN	-	XC6219B21APR	LVR-IC	LDO, 2.15V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFP	-	XC6219B22APR	LVR-IC	LDO, 2.25V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFR	-	XC6219B23APR	LVR-IC	LDO, 2.35V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFS	-	XC6219B24APR	LVR-IC	LDO, 2.45V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFT	-	XC6219B25APR	LVR-IC	LDO, 2.55V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFU	-	XC6219B26APR	LVR-IC	LDO, 2.65V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFV	-	XC6219B27APR	LVR-IC	LDO, 2.75V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFX	-	XC6219B28APR	LVR-IC	LDO, 2.85V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFY	-	XC6219B29BPR	LVR-IC	LDO, 2.95V±1%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LFZ	-	XC6219B30APR	LVR-IC	LDO, 3.05V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LG	-	ELM99263B	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
LH	-	ELM99273B	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
LH8	-	XC6219C09APR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LH9	-	XC6219C10APR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHA	-	XC6219C11APR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHB	-	XC6219C12APR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHC	-	XC6219C13APR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHD	-	XC6219C14APR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHE	-	XC6219C15APR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHF	-	XC6219C16APR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHH	-	XC6219C17APR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHK	-	XC6219C18APR	LVR-IC	LDO, 1.85V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHL	-	XC6219C19APR	LVR-IC	LDO, 1.95V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHM	-	XC6219C20APR	LVR-IC	LDO, 2.05V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHN	-	XC6219C21APR	LVR-IC	LDO, 2.15V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHP	-	XC6219C22APR	LVR-IC	LDO, 2.25V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHR	-	XC6219C23APR	LVR-IC	LDO, 2.35V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHS	-	XC6219C24APR	LVR-IC	LDO, 2.45V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHT	-	XC6219C25APR	LVR-IC	LDO, 2.55V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHU	-	XC6219C26APR	LVR-IC	LDO, 2.65V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHV	-	XC6219C27APR	LVR-IC	LDO, 2.75V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHX	-	XC6219C28APR	LVR-IC	LDO, 2.85V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHY	-	XC6219C29APR	LVR-IC	LDO, 2.95V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LHZ	-	XC6219C30APR	LVR-IC	LDO, 3.05V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LJ	-	ELM99283B	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
LK	-	ELM99293B	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
LK8	-	XC6219D09APR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LK9	-	XC6219D10APR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKA	-	XC6219D11APR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKB	-	XC6219D12APR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKC	-	XC6219D13APR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKD	-	XC6219D14APR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKE	-	XC6219D15APR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKF	-	XC6219D16APR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LKH	-	XC6219D17APR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKK	-	XC6219D18APR	LVR-IC	LDO, 1.85V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKL	-	XC6219D19APR	LVR-IC	LDO, 1.95V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKM	-	XC6219D20APR	LVR-IC	LDO, 2.05V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKN	-	XC6219D21APR	LVR-IC	LDO, 2.15V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKP	-	XC6219D22APR	LVR-IC	LDO, 2.25V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKR	-	XC6219D23APR	LVR-IC	LDO, 2.35V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKS	-	XC6219D24APR	LVR-IC	LDO, 2.45V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKT	-	XC6219D25APR	LVR-IC	LDO, 2.55V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKU	-	XC6219D26APR	LVR-IC	LDO, 2.65V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKV	-	XC6219D27APR	LVR-IC	LDO, 2.75V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKX	-	XC6219D28APR	LVR-IC	LDO, 2.85V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKY	-	XC6219D29APR	LVR-IC	LDO, 2.95V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LKZ	-	XC6219D30APR	LVR-IC	LDO, 3.05V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LL0	-	XC6219A31APR	LVR-IC	LDO, 3.15V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LL1	-	XC6219A32APR	LVR-IC	LDO, 3.25V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LL2	-	XC6219A33APR	LVR-IC	LDO, 3.35V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LL3	-	XC6219A34APR	LVR-IC	LDO, 3.45V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LL4	-	XC6219A35APR	LVR-IC	LDO, 3.55V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LL5	-	XC6219A36APR	LVR-IC	LDO, 3.65V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LL6	-	XC6219A37APR	LVR-IC	LDO, 3.75V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LL7	-	XC6219A38APR	LVR-IC	LDO, 3.85V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LL8	-	XC6219A39APR	LVR-IC	LDO, 3.95V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LL9	-	XC6219A40APR	LVR-IC	LDO, 4.05V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LLA	-	XC6219A41APR	LVR-IC	LDO, 4.15V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LLB	-	XC6219A42APR	LVR-IC	LDO, 4.25V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LLC	-	XC6219A43APR	LVR-IC	LDO, 4.35V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LLD	-	XC6219A44APR	LVR-IC	LDO, 4.45V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LLE	-	XC6219A45APR	LVR-IC	LDO, 4.55V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LLF	-	XC6219A46APR	LVR-IC	LDO, 4.65V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LLH	-	XC6219A47APR	LVR-IC	LDO, 4.75V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LLK	-	XC6219A48APR	LVR-IC	LDO, 4.85V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LLL	-	XC6219A49APR	LVR-IC	LDO, 4.95V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LM0	-	XC6219B31APR	LVR-IC	LDO, 3.15V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LM1	-	XC6219B32APR	LVR-IC	LDO, 3.25V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LM2	-	XC6219B33APR	LVR-IC	LDO, 3.35V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LM3	-	XC6219B34APR	LVR-IC	LDO, 3.45V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LM4	-	XC6219B35APR	LVR-IC	LDO, 3.55V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LM5	-	XC6219B36APR	LVR-IC	LDO, 3.65V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LM6	-	XC6219B37APR	LVR-IC	LDO, 3.75V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LM7	-	XC6219B38APR	LVR-IC	LDO, 3.85V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LM8	-	XC6219B39APR	LVR-IC	LDO, 3.95V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LM9	-	XC6219B40APR	LVR-IC	LDO, 4.05V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LMA	-	XC6219B41APR	LVR-IC	LDO, 4.15V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LMB	-	XC6219B42APR	LVR-IC	LDO, 4.25V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LMC	-	XC6219B43APR	LVR-IC	LDO, 4.35V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LMD	-	XC6219B44APR	LVR-IC	LDO, 4.45V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LME	-	XC6219B45APR	LVR-IC	LDO, 4.55V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LMF	-	XC6219B46APR	LVR-IC	LDO, 4.65V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LMH	-	XC6219B47APR	LVR-IC	LDO, 4.75V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LMK	-	XC6219B48APR	LVR-IC	LDO, 4.85V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LML	-	XC6219B49APR	LVR-IC	LDO, 4.95V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LN0	-	XC6219C31APR	LVR-IC	LDO, 3.15V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LN1	-	XC6219C32APR	LVR-IC	LDO, 3.25V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LN2	-	XC6219C33APR	LVR-IC	LDO, 3.35V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LN3	-	XC6219C34APR	LVR-IC	LDO, 3.45V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LN4	-	XC6219C35APR	LVR-IC	LDO, 3.55V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LN5	-	XC6219C36APR	LVR-IC	LDO, 3.65V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LN6	-	XC6219C37APR	LVR-IC	LDO, 3.75V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LN7	-	XC6219C38APR	LVR-IC	LDO, 3.85V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LN8	-	XC6219C39APR	LVR-IC	LDO, 3.95V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LN9	-	XC6219C40APR	LVR-IC	LDO, 4.05V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LNA	-	XC6219C41APR	LVR-IC	LDO, 4.15V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LNB	-	XC6219C42APR	LVR-IC	LDO, 4.25V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LNC	-	XC6219C43APR	LVR-IC	LDO, 4.35V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LND	-	XC6219C44APR	LVR-IC	LDO, 4.45V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LNE	-	XC6219C45APR	LVR-IC	LDO, 4.55V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LNF	-	XC6219C46APR	LVR-IC	LDO, 4.65V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LNH	-	XC6219C47APR	LVR-IC	LDO, 4.75V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LNK	-	XC6219C48APR	LVR-IC	LDO, 4.85V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LNL	-	XC6219C49APR	LVR-IC	LDO, 4.95V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LP0	-	XC6219D31APR	LVR-IC	LDO, 3.15V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LP1	-	XC6219D32APR	LVR-IC	LDO, 3.25V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LP2	-	XC6219D33APR	LVR-IC	LDO, 3.35V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LP3	-	XC6219D34APR	LVR-IC	LDO, 3.45V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LP4	-	XC6219D35APR	LVR-IC	LDO, 3.55V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LP5	-	XC6219D36APR	LVR-IC	LDO, 3.65V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LP6	-	XC6219D37APR	LVR-IC	LDO, 3.75V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LP7	-	XC6219D38APR	LVR-IC	LDO, 3.85V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LP8	-	XC6219D39APR	LVR-IC	LDO, 3.95V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LP9	-	XC6219D40APR	LVR-IC	LDO, 4.05V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LPA	-	XC6219D41APR	LVR-IC	LDO, 4.15V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LPB	-	XC6219D42APR	LVR-IC	LDO, 4.25V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LPC	-	XC6219D43APR	LVR-IC	LDO, 4.35V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LPD	-	XC6219D44APR	LVR-IC	LDO, 4.45V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LPE	-	XC6219D45APR	LVR-IC	LDO, 4.55V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LPF	-	XC6219D46APR	LVR-IC	LDO, 4.65V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LPH	-	XC6219D47APR	LVR-IC	LDO, 4.75V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LPK	-	XC6219D48APR	LVR-IC	LDO, 4.85V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LPL	-	XC6219D49APR	LVR-IC	LDO, 4.95V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LV8	-	XC6219A092PR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LV9	-	XC6219A102PR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVA	-	XC6219A112PR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVB	-	XC6219A122PR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVC	-	XC6219A132PR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVD	-	XC6219A142PR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVE	-	XC6219A152PR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVF	-	XC6219A162PR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVH	-	XC6219A172PR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVK	-	XC6219A182PR	LVR-IC	LDO, 1.8V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVL	-	XC6219A192PR	LVR-IC	LDO, 1.9V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVM	-	XC6219A202PR	LVR-IC	LDO, 2.0V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVN	-	XC6219A212PR	LVR-IC	LDO, 2.1V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVP	-	XC6219A222PR	LVR-IC	LDO, 2.2V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVR	-	XC6219A232PR	LVR-IC	LDO, 2.3V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVS	-	XC6219A242PR	LVR-IC	LDO, 2.4V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVT	-	XC6219A252PR	LVR-IC	LDO, 2.5V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVU	-	XC6219A262PR	LVR-IC	LDO, 2.6V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVV	-	XC6219A272PR	LVR-IC	LDO, 2.7V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVX	-	XC6219A282PR	LVR-IC	LDO, 2.8V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVY	-	XC6219A292PR	LVR-IC	LDO, 2.9V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LVZ	-	XC6219A302PR	LVR-IC	LDO, 3.0V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Tor
LX8	-	XC6219B092PR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LX9	-	XC6219B102PR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXA	-	XC6219B112PR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXB	-	XC6219B122PR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXC	-	XC6219B132PR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXD	-	XC6219B142PR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXE	-	XC6219B152PR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXF	-	XC6219B162PR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXH	-	XC6219B172PR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXK	-	XC6219B182PR	LVR-IC	LDO, 1.8V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXL	-	XC6219B192PR	LVR-IC	LDO, 1.9V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXM	-	XC6219B202PR	LVR-IC	LDO, 2.0V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXN	-	XC6219B212PR	LVR-IC	LDO, 2.1V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXP	-	XC6219B222PR	LVR-IC	LDO, 2.2V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXR	-	XC6219B232PR	LVR-IC	LDO, 2.3V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXS	-	XC6219B242PR	LVR-IC	LDO, 2.4V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXT	-	XC6219B252PR	LVR-IC	LDO, 2.5V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXU	-	XC6219B262PR	LVR-IC	LDO, 2.6V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXV	-	XC6219B272PR	LVR-IC	LDO, 2.7V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXX	-	XC6219B282PR	LVR-IC	LDO, 2.8V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXY	-	XC6219B292PR	LVR-IC	LDO, 2.9V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LXZ	-	XC6219B302PR	LVR-IC	LDO, 3.0V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Tor
LY8	-	XC6219C092PR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LY9	-	XC6219C102PR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYA	-	XC6219C112PR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYB	-	XC6219C122PR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYC	-	XC6219C132PR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYD	-	XC6219C142PR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LYE	-	XC6219C152PR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYF	-	XC6219C162PR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYH	-	XC6219C172PR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYK	-	XC6219C182PR	LVR-IC	LDO, 1.8V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYL	-	XC6219C192PR	LVR-IC	LDO, 1.9V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYM	-	XC6219C202PR	LVR-IC	LDO, 2.0V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYN	-	XC6219C212PR	LVR-IC	LDO, 2.1V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYP	-	XC6219C222PR	LVR-IC	LDO, 2.2V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYR	-	XC6219C232PR	LVR-IC	LDO, 2.3V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYS	-	XC6219C242PR	LVR-IC	LDO, 2.4V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYT	-	XC6219C252PR	LVR-IC	LDO, 2.5V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYU	-	XC6219C262PR	LVR-IC	LDO, 2.6V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYV	-	XC6219C272PR	LVR-IC	LDO, 2.7V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYX	-	XC6219C282PR	LVR-IC	LDO, 2.8V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYY	-	XC6219C292PR	LVR-IC	LDO, 2.9V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LYZ	-	XC6219C302PR	LVR-IC	LDO, 3.0V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Tor
LZ8	-	XC6219D092PR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZ9	-	XC6219D102PR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZA	-	XC6219D112PR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZB	-	XC6219D122PR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZC	-	XC6219D132PR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZD	-	XC6219D142PR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZE	-	XC6219D152PR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZF	-	XC6219D162PR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZH	-	XC6219D172PR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZK	-	XC6219D182PR	LVR-IC	LDO, 1.8V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZL	-	XC6219D192PR	LVR-IC	LDO, 1.9V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZM	-	XC6219D202PR	LVR-IC	LDO, 2.0V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZN	-	XC6219D212PR	LVR-IC	LDO, 2.1V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZP	-	XC6219D222PR	LVR-IC	LDO, 2.2V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZR	-	XC6219D232PR	LVR-IC	LDO, 2.3V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZS	-	XC6219D242PR	LVR-IC	LDO, 2.4V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZT	-	XC6219D252PR	LVR-IC	LDO, 2.5V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZU	-	XC6219D262PR	LVR-IC	LDO, 2.6V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZV	-	XC6219D272PR	LVR-IC	LDO, 2.7V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZX	-	XC6219D282PR	LVR-IC	LDO, 2.8V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZY	-	XC6219D292PR	LVR-IC	LDO, 2.9V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
LZZ	-	XC6219D302PR	LVR-IC	LDO, 3.0V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Tor
M020	-	R1514H020B	LVR-IC	2V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M021	-	R1514H021B	LVR-IC	2.1V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M022	-	R1514H022B	LVR-IC	2.2V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M023	-	R1514H023B	LVR-IC	2.3V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M024	-	R1514H024B	LVR-IC	2.4V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M025	-	R1514H025B	LVR-IC	2.5V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M026	-	R1514H026B	LVR-IC	2.6V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M027	-	R1514H027B	LVR-IC	2.7V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M028	-	R1514H028B	LVR-IC	2.8V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M029	-	R1514H029B	LVR-IC	2.9V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M030	-	R1514H030B	LVR-IC	3.0V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M031	-	R1514H031B	LVR-IC	3.1V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M032	-	R1514H032B	LVR-IC	3.2V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M033	-	R1514H033B	LVR-IC	3.3V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M034	-	R1514H034B	LVR-IC	3.4V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M035	-	R1514H035B	LVR-IC	3.5V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M036	-	R1514H036B	LVR-IC	3.6V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M037	-	R1514H037B	LVR-IC	3.7V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M038	-	R1514H038B	LVR-IC	3.8V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M039	-	R1514H039B	LVR-IC	3.8V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M040	-	R1514H040B	LVR-IC	4.0V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M041	-	R1514H041B	LVR-IC	4.1V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M042	-	R1514H042B	LVR-IC	4.2V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M043	-	R1514H043B	LVR-IC	4.3V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M044	-	R1514H044B	LVR-IC	4.4V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M045	-	R1514H045B	LVR-IC	4.5V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M046	-	R1514H046B	LVR-IC	4.6V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M047	-	R1514H047B	LVR-IC	4.7V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M048	-	R1514H048B	LVR-IC	4.8V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M049	-	R1514H049B	LVR-IC	4.9V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M050	-	R1514H050B	LVR-IC	5.0V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M051	-	R1514H051B	LVR-IC	5.1V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M052	-	R1514H052B	LVR-IC	5.2V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M053	-	R1514H053B	LVR-IC	5.3V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M054	-	R1514H054B	LVR-IC	5.4V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M055	-	R1514H055B	LVR-IC	5.5V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M056	-	R1514H056B	LVR-IC	5.6V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M057	-	R1514H057B	LVR-IC	5.7V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M058	-	R1514H058B	LVR-IC	5.8V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M059	-	R1514H059B	LVR-IC	5.9V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M060	-	R1514H060B	LVR-IC	6.0V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M061	-	R1514H061B	LVR-IC	6.1V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M062	-	R1514H062B	LVR-IC	6.2V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M063	-	R1514H063B	LVR-IC	6.3V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M064	-	R1514H064B	LVR-IC	6.4V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M065	-	R1514H065B	LVR-IC	6.5V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M066	-	R1514H066B	LVR-IC	6.6V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M067	-	R1514H067B	LVR-IC	6.7V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M068	-	R1514H068B	LVR-IC	6.8V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M069	-	R1514H069B	LVR-IC	6.9V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M070	-	R1514H070B	LVR-IC	7.0V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M071	-	R1514H071B	LVR-IC	7.1V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M072	-	R1514H072B	LVR-IC	7.2V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M073	-	R1514H073B	LVR-IC	7.3V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M074	-	R1514H074B	LVR-IC	7.4V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M075	-	R1514H075B	LVR-IC	7.5V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M076	-	R1514H076B	LVR-IC	7.6V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M077	-	R1514H077B	LVR-IC	7.7V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M078	-	R1514H078B	LVR-IC	7.8V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M079	-	R1514H079B	LVR-IC	7.9V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M080	-	R1514H080B	LVR-IC	8.0V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M081	-	R1514H081B	LVR-IC	8.1V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M082	-	R1514H082B	LVR-IC	8.2V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M083	-	R1514H083B	LVR-IC	8.3V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M084	-	R1514H084B	LVR-IC	8.4V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M085	-	R1514H085B	LVR-IC	8.5V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M086	-	R1514H086B	LVR-IC	8.6V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M087	-	R1514H087B	LVR-IC	8.7V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M088	-	R1514H088B	LVR-IC	8.8V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M089	-	R1514H089B	LVR-IC	8.9V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M090	-	R1514H090B	LVR-IC	9.0V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M091	-	R1514H091B	LVR-IC	9.1V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M092	-	R1514H092B	LVR-IC	9.2V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M093	-	R1514H093B	LVR-IC	9.3V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M094	-	R1514H094B	LVR-IC	9.4V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M095	-	R1514H095B	LVR-IC	9.5V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M096	-	R1514H096B	LVR-IC	9.6V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M097	-	R1514H097B	LVR-IC	9.7V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M098	-	R1514H098B	LVR-IC	9.8V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M099	-	R1514H099B	LVR-IC	9.9V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M100	-	R1514H100B	LVR-IC	10.0V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M101	-	R1514H101B	LVR-IC	10.1V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M102	-	R1514H102B	LVR-IC	10.2V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M103	-	R1514H103B	LVR-IC	10.3V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M104	-	R1514H104B	LVR-IC	10.4V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M105	-	R1514H105B	LVR-IC	10.5V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M106	-	R1514H106B	LVR-IC	10.6V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M107	-	R1514H107B	LVR-IC	10.7V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M108	-	R1514H108B	LVR-IC	10.8V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M109	-	R1514H109B	LVR-IC	10.9V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M110	-	R1514H110B	LVR-IC	11.0V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M111	-	R1514H111B	LVR-IC	11.1V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M112	-	R1514H112B	LVR-IC	11.2V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M113	-	R1514H113B	LVR-IC	11.3V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M114	-	R1514H114B	LVR-IC	11.4V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M115	-	R1514H115B	LVR-IC	11.5V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M116	-	R1514H116B	LVR-IC	11.6V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M117	-	R1514H117B	LVR-IC	11.7V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M118	-	R1514H118B	LVR-IC	11.8V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M119	-	R1514H119B	LVR-IC	11.9V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M120	-	R1514H120B	LVR-IC	12.0V±2%, 150mA, +CE	SOT-89-5	32wg	VR4	6h	Ric
M20	kb	XC6382D201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M21	kb	XC6382D211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M22	kb	XC6382D221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M23	kb	XC6382D231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M24	kb	XC6382D241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M25	kb	XC6382D251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M26	kb	XC6382D261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M27	kb	XC6382D271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M28	kb	XC6382D281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M29	kb	XC6382D291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M30	kb	XC6382D301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M31	kb	XC6382D311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M32	kb	XC6382D321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M33	kb	XC6382D331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M34	kb	XC6382D341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M35	kb	XC6382D351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M36	kb	XC6382D361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M37	kb	XC6382D371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M38	kb	XC6382D381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M39	kb	XC6382D391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M40	kb	XC6382D401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M41	kb	XC6382D411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M42	kb	XC6382D421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M43	kb	XC6382D431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M44	kb	XC6382D441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M45	kb	XC6382D451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M46	kb	XC6382D461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M47	kb	XC6382D471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M48	kb	XC6382D481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M49	kb	XC6382D491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M50	kb	XC6382D501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M51	kb	XC6382D511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M52	kb	XC6382D521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M53	kb	XC6382D531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M54	kb	XC6382D541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M55	kb	XC6382D551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M56	kb	XC6382D561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M57	kb	XC6382D571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M58	kb	XC6382D581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M59	kb	XC6382D591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M60	kb	XC6382D601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M61	kb	XC6382D611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M62	kb	XC6382D621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M63	kb	XC6382D631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M64	kb	XC6382D641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M65	kb	XC6382D651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M66	kb	XC6382D661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M67	kb	XC6382D671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M68	kb	XC6382D681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M69	kb	XC6382D691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
M70	kb	XC6382D701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
MA	-	ELM99303B	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
MB	-	ELM99313B	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
MC	-	ELM99323B	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
MD	-	ELM99333B	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
ME	-	ELM99343B	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
MF	-	ELM99353B	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
MG	-	ELM99363B	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
MH	-	ELM99373B	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
MJ	-	ELM99383B	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
MK	-	ELM99393B	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
N020	-	R1515H020B	LVR-IC	2.0V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N021	-	R1515H021B	LVR-IC	2.1V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N022	-	R1515H022B	LVR-IC	2.2V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N023	-	R1515H023B	LVR-IC	2.3V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N024	-	R1515H024B	LVR-IC	2.4V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N025	-	R1515H025B	LVR-IC	2.5V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N026	-	R1515H026B	LVR-IC	2.6V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N027	-	R1515H027B	LVR-IC	2.7V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N028	-	R1515H028B	LVR-IC	2.8V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N029	-	R1515H029B	LVR-IC	2.9V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N030	-	R1515H030B	LVR-IC	3.0V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N031	-	R1515H031B	LVR-IC	3.1V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N032	-	R1515H032B	LVR-IC	3.2V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N033	-	R1515H033B	LVR-IC	3.3V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N034	-	R1515H034B	LVR-IC	3.4V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N035	-	R1515H035B	LVR-IC	3.5V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N036	-	R1515H036B	LVR-IC	3.6V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N037	-	R1515H037B	LVR-IC	3.7V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N038	-	R1515H038B	LVR-IC	3.8V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N039	-	R1515H039B	LVR-IC	3.9V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N040	-	R1515H040B	LVR-IC	4.0V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N041	-	R1515H041B	LVR-IC	4.1V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N042	-	R1515H042B	LVR-IC	4.2V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N043	-	R1515H043B	LVR-IC	4.3V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N044	-	R1515H044B	LVR-IC	4.4V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N045	-	R1515H045B	LVR-IC	4.5V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N046	-	R1515H046B	LVR-IC	4.6V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N047	-	R1515H047B	LVR-IC	4.7V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N048	-	R1515H048B	LVR-IC	4.8V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N049	-	R1515H049B	LVR-IC	4.9V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N050	-	R1515H050B	LVR-IC	5.0V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N051	-	R1515H051B	LVR-IC	5.1V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N052	-	R1515H052B	LVR-IC	5.2V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N053	-	R1515H053B	LVR-IC	5.3V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N054	-	R1515H054B	LVR-IC	5.4V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N055	-	R1515H055B	LVR-IC	5.5V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N056	-	R1515H056B	LVR-IC	5.6V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N057	-	R1515H057B	LVR-IC	5.7V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N058	-	R1515H058B	LVR-IC	5.8V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N059	-	R1515H059B	LVR-IC	5.9V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N060	-	R1515H060B	LVR-IC	6.0V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N061	-	R1515H061B	LVR-IC	6.1V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N062	-	R1515H062B	LVR-IC	6.2V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N063	-	R1515H063B	LVR-IC	6.3V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N064	-	R1515H064B	LVR-IC	6.4V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N065	-	R1515H065B	LVR-IC	6.5V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N066	-	R1515H066B	LVR-IC	6.6V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N067	-	R1515H067B	LVR-IC	6.7V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N068	-	R1515H068B	LVR-IC	6.8V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N069	-	R1515H069B	LVR-IC	6.9V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N070	-	R1515H070B	LVR-IC	7.0V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N071	-	R1515H071B	LVR-IC	7.1V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N072	-	R1515H072B	LVR-IC	7.2V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N073	-	R1515H073B	LVR-IC	7.3V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N074	-	R1515H074B	LVR-IC	7.4V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N075	-	R1515H075B	LVR-IC	7.5V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N076	-	R1515H076B	LVR-IC	7.6V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N077	-	R1515H077B	LVR-IC	7.7V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N078	-	R1515H078B	LVR-IC	7.8V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N079	-	R1515H079B	LVR-IC	7.9V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N080	-	R1515H080B	LVR-IC	8.0V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N081	-	R1515H081B	LVR-IC	8.1V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N082	-	R1515H082B	LVR-IC	8.2V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N083	-	R1515H083B	LVR-IC	8.3V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N084	-	R1515H084B	LVR-IC	8.4V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N085	-	R1515H085B	LVR-IC	8.5V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N086	-	R1515H086B	LVR-IC	8.6V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N087	-	R1515H087B	LVR-IC	8.7V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N088	-	R1515H088B	LVR-IC	8.8V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N089	-	R1515H089B	LVR-IC	8.9V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N090	-	R1515H090B	LVR-IC	9.0V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N091	-	R1515H091B	LVR-IC	9.1V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N092	-	R1515H092B	LVR-IC	9.2V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N093	-	R1515H093B	LVR-IC	9.3V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N094	-	R1515H094B	LVR-IC	9.4V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N095	-	R1515H095B	LVR-IC	9.5V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N096	-	R1515H096B	LVR-IC	9.6V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N097	-	R1515H097B	LVR-IC	9.7V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N098	-	R1515H098B	LVR-IC	9.8V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N099	-	R1515H099B	LVR-IC	9.9V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N100	-	R1515H100B	LVR-IC	10.0V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N101	-	R1515H101B	LVR-IC	10.1V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N102	-	R1515H102B	LVR-IC	10.2V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N103	-	R1515H103B	LVR-IC	10.3V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N104	-	R1515H104B	LVR-IC	10.4V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N105	-	R1515H105B	LVR-IC	10.5V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N106	-	R1515H106B	LVR-IC	10.6V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N107	-	R1515H107B	LVR-IC	10.7V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N108	-	R1515H108B	LVR-IC	10.8V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N109	-	R1515H109B	LVR-IC	10.9V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N110	-	R1515H110B	LVR-IC	11.0V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N111	-	R1515H111B	LVR-IC	11.1V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N112	-	R1515H112B	LVR-IC	11.2V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N113	-	R1515H113B	LVR-IC	11.3V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N114	-	R1515H114B	LVR-IC	11.4V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N115	-	R1515H115B	LVR-IC	11.5V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N116	-	R1515H116B	LVR-IC	11.6V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N117	-	R1515H117B	LVR-IC	11.7V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N118	-	R1515H118B	LVR-IC	11.8V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N119	-	R1515H119B	LVR-IC	11.9V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N120	-	R1515H120B	LVR-IC	12V±2%, 50mA, +CE	SOT-89-5	32yp	VR4	6h	Ric
N20	kb	XC6382E201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N20	ke	XC6385E201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N21	kb	XC6382E211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N21	ke	XC6385E211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N22	kb	XC6382E221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N22	ke	XC6385E221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N23	kb	XC6382E231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N23	ke	XC6385E231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N24	kb	XC6382E241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N24	ke	XC6385E241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N25	kb	XC6382E251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N25	ke	XC6385E251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N26	kb	XC6382E261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N26	ke	XC6385E261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N27	kb	XC6382E271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N27	ke	XC6385E271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N28	kb	XC6382E281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N28	ke	XC6385E281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N29	kb	XC6382E291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N29	ke	XC6385E291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N30	kb	XC6382E301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N30	ke	XC6385E301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N31	kb	XC6382E311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N31	ke	XC6385E311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N32	kb	XC6382E321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N32	ke	XC6385E321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N33	kb	XC6382E331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N33	ke	XC6385E331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N34	kb	XC6382E341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N34	ke	XC6385E341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N35	kb	XC6382E351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N35	ke	XC6385E351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N36	kb	XC6382E361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N36	ke	XC6385E361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N37	kb	XC6382E371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N37	ke	XC6385E371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N38	kb	XC6382E381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N38	ke	XC6385E381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N39	kb	XC6382E391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N39	ke	XC6385E391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N40	kb	XC6382E401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N40	ke	XC6385E401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N41	kb	XC6382E411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N41	ke	XC6385E411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N42	kb	XC6382E421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N42	ke	XC6385E421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N43	kb	XC6382E431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N43	ke	XC6385E431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N44	kb	XC6382E441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N44	ke	XC6385E441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N45	kb	XC6382E451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N45	ke	XC6385E451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N46	kb	XC6382E461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N46	ke	XC6385E461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N47	kb	XC6382E471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N47	ke	XC6385E471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N48	kb	XC6382E481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N48	ke	XC6385E481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N49	kb	XC6382E491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N49	ke	XC6385E491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N4A	-	S-1131B15UC-N4A-TF	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4B	-	S-1131B16UC-N4B-TF	LVR-IC	LDO, 1.6V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4C	-	S-1131B17UC-N4C-TF	LVR-IC	LDO, 1.7V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4D	-	S-1131B18UC-N4D-TF	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4E	-	S-1131B19UC-N4E-TF	LVR-IC	LDO, 1.9V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4F	-	S-1131B20UC-N4F-TF	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4G	-	S-1131B21UC-N4G-TF	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4H	-	S-1131B22UC-N4H-TF	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4I	-	S-1131B23UC-N4I-TF	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4J	-	S-1131B24UC-N4J-TF	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4K	-	S-1131B25UC-N4K-TF	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4L	-	S-1131B26UC-N4L-TF	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4M	-	S-1131B27UC-N4M-TF	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4N	-	S-1131B28UC-N4N-TF	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4O	-	S-1131B29UC-N4O-TF	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4P	-	S-1131B30UC-N4P-TF	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4Q	-	S-1131B31UC-N4Q-TF	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4R	-	S-1131B32UC-N4R-TF	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4S	-	S-1131B33UC-N4S-TF	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4T	-	S-1131B34UC-N4T-TF	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4U	-	S-1131B35UC-N4U-TF	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4V	-	S-1131B36UC-N4V-TF	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4W	-	S-1131B37UC-N4W-TF	LVR-IC	LDO, 3.7V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4X	-	S-1131B38UC-N4X-TF	LVR-IC	LDO, 3.8V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4Y	-	S-1131B39UC-N4Y-TF	LVR-IC	LDO, 3.9V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N4Z	-	S-1131B40UC-N4Z-TF	LVR-IC	LDO, 4.0V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N50	kb	XC6382E501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N50	ke	XC6385E501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N51	kb	XC6382E511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N51	ke	XC6385E511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N52	kb	XC6382E521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N52	ke	XC6385E521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N53	kb	XC6382E531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N53	ke	XC6385E531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N54	kb	XC6382E541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N54	ke	XC6385E541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N55	kb	XC6382E551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N55	ke	XC6385E551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N56	kb	XC6382E561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N56	ke	XC6385E561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N57	kb	XC6382E571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N57	ke	XC6385E571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N58	kb	XC6382E581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N58	ke	XC6385E581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N59	kb	XC6382E591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N59	ke	XC6385E591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N5A	-	S-1131B41UC-N5A-TF	LVR-IC	LDO, 4.1V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N5B	-	S-1131B42UC-N5B-TF	LVR-IC	LDO, 4.2V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N5C	-	S-1131B43UC-N5C-TF	LVR-IC	LDO, 4.3V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N5D	-	S-1131B44UC-N5D-TF	LVR-IC	LDO, 4.4V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N5E	-	S-1131B45UC-N5E-TF	LVR-IC	LDO, 4.5V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N5F	-	S-1131B46UC-N5F-TF	LVR-IC	LDO, 4.6V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N5G	-	S-1131B47UC-N5G-TF	LVR-IC	LDO, 4.7V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N5H	-	S-1131B48UC-N5H-TF	LVR-IC	LDO, 4.8V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N5I	-	S-1131B49UC-N5I-TF	LVR-IC	LDO, 4.9V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N5J	-	S-1131B50UC-N5J-TF	LVR-IC	LDO, 5.0V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N5K	-	S-1131B51UC-N5K-TF	LVR-IC	LDO, 5.1V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N5L	-	S-1131B52UC-N5L-TF	LVR-IC	LDO, 5.2V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N5M	-	S-1131B53UC-N5M-TF	LVR-IC	LDO, 5.3V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N5N	-	S-1131B54UC-N5N-TF	LVR-IC	LDO, 5.4V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N5O	-	S-1131B55UC-N5O-TF	LVR-IC	LDO, 5.5V±1%, 300mA, +CE	SOT-89-5	32vm	VR4	6j	Sii
N60	kb	XC6382E601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N60	ke	XC6385E601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N61	kb	XC6382E611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N61	ke	XC6385E611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N62	kb	XC6382E621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N62	ke	XC6385E621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N63	kb	XC6382E631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N63	ke	XC6385E631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N64	kb	XC6382E641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N64	ke	XC6385E641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N65	kb	XC6382E651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N65	ke	XC6385E651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N66	kb	XC6382E661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N66	ke	XC6385E661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N67	kb	XC6382E671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N67	ke	XC6385E671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N68	kb	XC6382E681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N68	ke	XC6385E681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N69	kb	XC6382E691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N69	ke	XC6385E691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N70	kb	XC6382E701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
N70	ke	XC6385E701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
NA	-	ELM99403B	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
NB	-	ELM99413B	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
NC	-	ELM99423B	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
NC8	-	XC6222A081PR-G	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NC9	-	XC6222A091PR-G	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCA	-	XC6222A101PR-G	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCB	-	XC6222A111PR-G	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCC	-	XC6222A121PR-G	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCD	-	XC6222A131PR-G	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCE	-	XC6222A141PR-G	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCF	-	XC6222A151PR-G	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCH	-	XC6222A161PR-G	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCK	-	XC6222A171PR-G	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCL	-	XC6222A181PR-G	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCM	-	XC6222A191PR-G	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCN	-	XC6222A201PR-G	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCP	-	XC6222A211PR-G	LVR-IC	LDO, 2.1V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCR	-	XC6222A221PR-G	LVR-IC	LDO, 2.2V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCS	-	XC6222A231PR-G	LVR-IC	LDO, 2.3V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCT	-	XC6222A241PR-G	LVR-IC	LDO, 2.4V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCU	-	XC6222A251PR-G	LVR-IC	LDO, 2.5V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCV	-	XC6222A261PR-G	LVR-IC	LDO, 2.6V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCX	-	XC6222A271PR-G	LVR-IC	LDO, 2.7V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCY	-	XC6222A281PR-G	LVR-IC	LDO, 2.8V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NCZ	-	XC6222A291PR-G	LVR-IC	LDO, 2.9V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
ND	-	ELM99433B	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
ND8	-	XC6222A08BPR-G	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
ND9	-	XC6222A09BPR-G	LVR-IC	LDO, 0.95V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDA	-	XC6222A10BPR-G	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDB	-	XC6222A11BPR-G	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDC	-	XC6222A12BPR-G	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDD	-	XC6222A13BPR-G	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDE	-	XC6222A14BPR-G	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDF	-	XC6222A15BPR-G	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDH	-	XC6222A16BPR-G	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDK	-	XC6222A17BPR-G	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDL	-	XC6222A18BPR-G	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDM	-	XC6222A19BPR-G	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDN	-	XC6222A20BPR-G	LVR-IC	LDO, 2.05V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDP	-	XC6222A21BPR-G	LVR-IC	LDO, 2.15V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDR	-	XC6222A22BPR-G	LVR-IC	LDO, 2.25V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDS	-	XC6222A23BPR-G	LVR-IC	LDO, 2.35V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDT	-	XC6222A24BPR-G	LVR-IC	LDO, 2.45V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDU	-	XC6222A25BPR-G	LVR-IC	LDO, 2.55V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDV	-	XC6222A26BPR-G	LVR-IC	LDO, 2.65V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDX	-	XC6222A27BPR-G	LVR-IC	LDO, 2.75V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NDY	-	XC6222A28BPR-G	LVR-IC	LDO, 2.85V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NDZ	-	XC6222A29BPR-G	LVR-IC	LDO, 2.95V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NE	-	ELM99443B	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
NE0	-	XC6222A301PR-G	LVR-IC	LDO, 3.0V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NE1	-	XC6222A311PR-G	LVR-IC	LDO, 3.1V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NE2	-	XC6222A321PR-G	LVR-IC	LDO, 3.2V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NE3	-	XC6222A331PR-G	LVR-IC	LDO, 3.3V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NE4	-	XC6222A341PR-G	LVR-IC	LDO, 3.4V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NE5	-	XC6222A351PR-G	LVR-IC	LDO, 3.5V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NE6	-	XC6222A361PR-G	LVR-IC	LDO, 3.6V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NE7	-	XC6222A371PR-G	LVR-IC	LDO, 3.7V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NE8	-	XC6222A381PR-G	LVR-IC	LDO, 3.8V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NE9	-	XC6222A391PR-G	LVR-IC	LDO, 3.9V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NEA	-	XC6222A401PR-G	LVR-IC	LDO, 4.0V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NEB	-	XC6222A411PR-G	LVR-IC	LDO, 4.1V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NEC	-	XC6222A421PR-G	LVR-IC	LDO, 4.2V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NED	-	XC6222A431PR-G	LVR-IC	LDO, 4.3V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NEE	-	XC6222A441PR-G	LVR-IC	LDO, 4.4V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NEF	-	XC6222A451PR-G	LVR-IC	LDO, 4.5V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NEH	-	XC6222A461PR-G	LVR-IC	LDO, 4.6V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NEK	-	XC6222A471PR-G	LVR-IC	LDO, 4.7V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NEL	-	XC6222A481PR-G	LVR-IC	LDO, 4.8V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NEM	-	XC6222A491PR-G	LVR-IC	LDO, 4.9V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NEN	-	XC6222A501PR-G	LVR-IC	LDO, 5.0V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NF	-	ELM99453B	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
NF0	-	XC6222A30BPR-G	LVR-IC	LDO, 3.05V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NF1	-	XC6222A31BPR-G	LVR-IC	LDO, 3.15V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NF2	-	XC6222A32BPR-G	LVR-IC	LDO, 3.25V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NF3	-	XC6222A33BPR-G	LVR-IC	LDO, 3.35V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NF4	-	XC6222A34BPR-G	LVR-IC	LDO, 3.45V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NF5	-	XC6222A35BPR-G	LVR-IC	LDO, 3.55V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NF6	-	XC6222A36BPR-G	LVR-IC	LDO, 3.65V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NF7	-	XC6222A37BPR-G	LVR-IC	LDO, 3.75V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NF8	-	XC6222A38BPR-G	LVR-IC	LDO, 3.85V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NF9	-	XC6222A39BPR-G	LVR-IC	LDO, 3.95V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NFA	-	XC6222A40BPR-G	LVR-IC	LDO, 4.05V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NFB	-	XC6222A41BPR-G	LVR-IC	LDO, 4.15V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NFC	-	XC6222A42BPR-G	LVR-IC	LDO, 4.25V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NFD	-	XC6222A43BPR-G	LVR-IC	LDO, 4.35V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NFE	-	XC6222A44BPR-G	LVR-IC	LDO, 4.45V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NFF	-	XC6222A45BPR-G	LVR-IC	LDO, 4.55V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NFH	-	XC6222A46BPR-G	LVR-IC	LDO, 4.65V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NFK	-	XC6222A47BPR-G	LVR-IC	LDO, 4.75V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NFL	-	XC6222A48BPR-G	LVR-IC	LDO, 4.85V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NFM	-	XC6222A49BPR-G	LVR-IC	LDO, 4.95V±1%, 700mA, +CE	SOT-89-5	32vy	VR4	6n	Tor
NG	-	ELM99463B	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
NH	-	ELM99473B	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
NH8	-	XC6222B081PR-G	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NH9	-	XC6222B091PR-G	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHA	-	XC6222B101PR-G	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHB	-	XC6222B111PR-G	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHC	-	XC6222B121PR-G	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHD	-	XC6222B131PR-G	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHE	-	XC6222B141PR-G	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHF	-	XC6222B151PR-G	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHH	-	XC6222B161PR-G	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHK	-	XC6222B171PR-G	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHL	-	XC6222B181PR-G	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHM	-	XC6222B191PR-G	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHN	-	XC6222B201PR-G	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHP	-	XC6222B211PR-G	LVR-IC	LDO, 2.1V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHR	-	XC6222B221PR-G	LVR-IC	LDO, 2.2V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHS	-	XC6222B231PR-G	LVR-IC	LDO, 2.3V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHT	-	XC6222B241PR-G	LVR-IC	LDO, 2.4V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHU	-	XC6222B251PR-G	LVR-IC	LDO, 2.5V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHV	-	XC6222B261PR-G	LVR-IC	LDO, 2.6V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHX	-	XC6222B271PR-G	LVR-IC	LDO, 2.7V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHY	-	XC6222B281PR-G	LVR-IC	LDO, 2.8V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NHZ	-	XC6222B291PR-G	LVR-IC	LDO, 2.9V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NJ	-	ELM99483B	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NK	-	ELM99493B	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
NK8	-	XC6222B08BPR-G	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NK9	-	XC6222B09BPR-G	LVR-IC	LDO, 0.95V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKA	-	XC6222B10BPR-G	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKB	-	XC6222B11BPR-G	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKC	-	XC6222B12BPR-G	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKD	-	XC6222B13BPR-G	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKE	-	XC6222B14BPR-G	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKF	-	XC6222B15BPR-G	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKH	-	XC6222B16BPR-G	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKK	-	XC6222B17BPR-G	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKL	-	XC6222B18BPR-G	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKM	-	XC6222B19BPR-G	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKN	-	XC6222B20BPR-G	LVR-IC	LDO, 2.05V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKP	-	XC6222B21BPR-G	LVR-IC	LDO, 2.15V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKR	-	XC6222B22BPR-G	LVR-IC	LDO, 2.25V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKS	-	XC6222B23BPR-G	LVR-IC	LDO, 2.35V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKT	-	XC6222B24BPR-G	LVR-IC	LDO, 2.45V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKU	-	XC6222B25BPR-G	LVR-IC	LDO, 2.55V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKV	-	XC6222B26BPR-G	LVR-IC	LDO, 2.65V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKX	-	XC6222B27BPR-G	LVR-IC	LDO, 2.75V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKY	-	XC6222B28BPR-G	LVR-IC	LDO, 2.85V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NKZ	-	XC6222B29BPR-G	LVR-IC	LDO, 2.95V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NL0	-	XC6222B301PR-G	LVR-IC	LDO, 3.0V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NL1	-	XC6222B311PR-G	LVR-IC	LDO, 3.1V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NL2	-	XC6222B321PR-G	LVR-IC	LDO, 3.2V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NL3	-	XC6222B331PR-G	LVR-IC	LDO, 3.3V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NL4	-	XC6222B341PR-G	LVR-IC	LDO, 3.4V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NL5	-	XC6222B351PR-G	LVR-IC	LDO, 3.5V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NL6	-	XC6222B361PR-G	LVR-IC	LDO, 3.6V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NL7	-	XC6222B371PR-G	LVR-IC	LDO, 3.7V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NL8	-	XC6222B381PR-G	LVR-IC	LDO, 3.8V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NL9	-	XC6222B391PR-G	LVR-IC	LDO, 3.9V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NLA	-	XC6222B401PR-G	LVR-IC	LDO, 4.0V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NLB	-	XC6222B411PR-G	LVR-IC	LDO, 4.1V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NLC	-	XC6222B421PR-G	LVR-IC	LDO, 4.2V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NLD	-	XC6222B431PR-G	LVR-IC	LDO, 4.3V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NLE	-	XC6222B441PR-G	LVR-IC	LDO, 4.4V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NLF	-	XC6222B451PR-G	LVR-IC	LDO, 4.5V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NLH	-	XC6222B461PR-G	LVR-IC	LDO, 4.6V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NLK	-	XC6222B471PR-G	LVR-IC	LDO, 4.7V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NLL	-	XC6222B481PR-G	LVR-IC	LDO, 4.8V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NLM	-	XC6222B491PR-G	LVR-IC	LDO, 4.9V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NLN	-	XC6222B501PR-G	LVR-IC	LDO, 5.0V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NM0	-	XC6222B30BPR-G	LVR-IC	LDO, 3.05V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NM1	-	XC6222B31BPR-G	LVR-IC	LDO, 3.15V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NM2	-	XC6222B32BPR-G	LVR-IC	LDO, 3.25V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NM3	-	XC6222B33BPR-G	LVR-IC	LDO, 3.35V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NM4	-	XC6222B34BPR-G	LVR-IC	LDO, 3.45V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NM5	-	XC6222B35BPR-G	LVR-IC	LDO, 3.55V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NM6	-	XC6222B36BPR-G	LVR-IC	LDO, 3.65V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NM7	-	XC6222B37BPR-G	LVR-IC	LDO, 3.75V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NM8	-	XC6222B38BPR-G	LVR-IC	LDO, 3.85V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NM9	-	XC6222B39BPR-G	LVR-IC	LDO, 3.95V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NMA	-	XC6222B40BPR-G	LVR-IC	LDO, 4.05V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NMB	-	XC6222B41BPR-G	LVR-IC	LDO, 4.15V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NMC	-	XC6222B42BPR-G	LVR-IC	LDO, 4.25V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NMD	-	XC6222B43BPR-G	LVR-IC	LDO, 4.35V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NME	-	XC6222B44BPR-G	LVR-IC	LDO, 4.45V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NMF	-	XC6222B45BPR-G	LVR-IC	LDO, 4.55V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NMH	-	XC6222B46BPR-G	LVR-IC	LDO, 4.65V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NMK	-	XC6222B47BPR-G	LVR-IC	LDO, 4.75V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NML	-	XC6222B48BPR-G	LVR-IC	LDO, 4.85V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NMM	-	XC6222B49BPR-G	LVR-IC	LDO, 4.95V±1%, 700mA, +CE, CL	SOT-89-5	32vy	VR4	6n	Tor
NN8	-	XC6222C081PR-G	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NN9	-	XC6222C091PR-G	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNA	-	XC6222C101PR-G	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNB	-	XC6222C111PR-G	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNC	-	XC6222C121PR-G	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NND	-	XC6222C131PR-G	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NNE	-	XC6222C141PR-G	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNF	-	XC6222C151PR-G	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNH	-	XC6222C161PR-G	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNK	-	XC6222C171PR-G	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNL	-	XC6222C181PR-G	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNM	-	XC6222C191PR-G	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNN	-	XC6222C201PR-G	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNP	-	XC6222C211PR-G	LVR-IC	LDO, 2.1V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNR	-	XC6222C221PR-G	LVR-IC	LDO, 2.2V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNS	-	XC6222C231PR-G	LVR-IC	LDO, 2.3V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNT	-	XC6222C241PR-G	LVR-IC	LDO, 2.4V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNU	-	XC6222C251PR-G	LVR-IC	LDO, 2.5V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNV	-	XC6222C261PR-G	LVR-IC	LDO, 2.6V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNX	-	XC6222C271PR-G	LVR-IC	LDO, 2.7V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNY	-	XC6222C281PR-G	LVR-IC	LDO, 2.8V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NNZ	-	XC6222C291PR-G	LVR-IC	LDO, 2.9V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NP8	-	XC6222C08BPR-G	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NP9	-	XC6222C09BPR-G	LVR-IC	LDO, 0.95V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPA	-	XC6222C10BPR-G	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPB	-	XC6222C11BPR-G	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPC	-	XC6222C12BPR-G	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPD	-	XC6222C13BPR-G	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPE	-	XC6222C14BPR-G	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPF	-	XC6222C15BPR-G	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPH	-	XC6222C16BPR-G	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPK	-	XC6222C17BPR-G	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPL	-	XC6222C18BPR-G	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPM	-	XC6222C19BPR-G	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPN	-	XC6222C20BPR-G	LVR-IC	LDO, 2.05V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPP	-	XC6222C21BPR-G	LVR-IC	LDO, 2.15V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPR	-	XC6222C22BPR-G	LVR-IC	LDO, 2.25V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPS	-	XC6222C23BPR-G	LVR-IC	LDO, 2.35V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPT	-	XC6222C24BPR-G	LVR-IC	LDO, 2.45V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPU	-	XC6222C25BPR-G	LVR-IC	LDO, 2.55V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPV	-	XC6222C26BPR-G	LVR-IC	LDO, 2.65V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPX	-	XC6222C27BPR-G	LVR-IC	LDO, 2.75V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPY	-	XC6222C28BPR-G	LVR-IC	LDO, 2.85V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NPZ	-	XC6222C29BPR-G	LVR-IC	LDO, 2.95V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NR0	-	XC6222C301PR-G	LVR-IC	LDO, 3.0V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NR1	-	XC6222C311PR-G	LVR-IC	LDO, 3.1V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NR2	-	XC6222C321PR-G	LVR-IC	LDO, 3.2V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NR3	-	XC6222C331PR-G	LVR-IC	LDO, 3.3V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NR4	-	XC6222C341PR-G	LVR-IC	LDO, 3.4V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NR5	-	XC6222C351PR-G	LVR-IC	LDO, 3.5V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NR6	-	XC6222C361PR-G	LVR-IC	LDO, 3.6V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NR7	-	XC6222C371PR-G	LVR-IC	LDO, 3.7V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NR8	-	XC6222C381PR-G	LVR-IC	LDO, 3.8V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NR9	-	XC6222C391PR-G	LVR-IC	LDO, 3.9V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NRA	-	XC6222C401PR-G	LVR-IC	LDO, 4.0V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NRB	-	XC6222C411PR-G	LVR-IC	LDO, 4.1V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NRC	-	XC6222C421PR-G	LVR-IC	LDO, 4.2V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NRD	-	XC6222C431PR-G	LVR-IC	LDO, 4.3V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NRE	-	XC6222C441PR-G	LVR-IC	LDO, 4.4V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NRF	-	XC6222C451PR-G	LVR-IC	LDO, 4.5V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NRH	-	XC6222C461PR-G	LVR-IC	LDO, 4.6V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NRK	-	XC6222C471PR-G	LVR-IC	LDO, 4.7V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NRL	-	XC6222C481PR-G	LVR-IC	LDO, 4.8V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NRM	-	XC6222C491PR-G	LVR-IC	LDO, 4.9V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NRN	-	XC6222C501PR-G	LVR-IC	LDO, 5.0V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NS0	-	XC6222C30BPR-G	LVR-IC	LDO, 3.05V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NS1	-	XC6222C31BPR-G	LVR-IC	LDO, 3.15V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NS2	-	XC6222C32BPR-G	LVR-IC	LDO, 3.25V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NS3	-	XC6222C33BPR-G	LVR-IC	LDO, 3.35V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NS4	-	XC6222C34BPR-G	LVR-IC	LDO, 3.45V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NS5	-	XC6222C35BPR-G	LVR-IC	LDO, 3.55V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NS6	-	XC6222C36BPR-G	LVR-IC	LDO, 3.65V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NS7	-	XC6222C37BPR-G	LVR-IC	LDO, 3.75V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NS8	-	XC6222C38BPR-G	LVR-IC	LDO, 3.85V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NS9	-	XC6222C39BPR-G	LVR-IC	LDO, 3.95V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NSA	-	XC6222C40BPR-G	LVR-IC	LDO, 4.05V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NSB	-	XC6222C41BPR-G	LVR-IC	LDO, 4.15V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NSC	-	XC6222C42BPR-G	LVR-IC	LDO, 4.25V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NSD	-	XC6222C43BPR-G	LVR-IC	LDO, 4.35V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NSE	-	XC6222C44BPR-G	LVR-IC	LDO, 4.45V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NSF	-	XC6222C45BPR-G	LVR-IC	LDO, 4.55V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NSH	-	XC6222C46BPR-G	LVR-IC	LDO, 4.65V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NSK	-	XC6222C47BPR-G	LVR-IC	LDO, 4.75V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NSL	-	XC6222C48BPR-G	LVR-IC	LDO, 4.85V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NSM	-	XC6222C49BPR-G	LVR-IC	LDO, 4.95V±1%, 700mA, +CE, PDR	SOT-89-5	32vy	VR4	6n	Tor
NT8	-	XC6222D081PR-G	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NT9	-	XC6222D091PR-G	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTA	-	XC6222D101PR-G	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTB	-	XC6222D111PR-G	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTC	-	XC6222D121PR-G	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTD	-	XC6222D131PR-G	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTE	-	XC6222D141PR-G	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTF	-	XC6222D151PR-G	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTH	-	XC6222D161PR-G	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTK	-	XC6222D171PR-G	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTL	-	XC6222D181PR-G	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTM	-	XC6222D191PR-G	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTN	-	XC6222D201PR-G	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTP	-	XC6222D211PR-G	LVR-IC	LDO, 2.1V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTR	-	XC6222D221PR-G	LVR-IC	LDO, 2.2V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTS	-	XC6222D231PR-G	LVR-IC	LDO, 2.3V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTT	-	XC6222D241PR-G	LVR-IC	LDO, 2.4V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTU	-	XC6222D251PR-G	LVR-IC	LDO, 2.5V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTV	-	XC6222D261PR-G	LVR-IC	LDO, 2.6V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTX	-	XC6222D271PR-G	LVR-IC	LDO, 2.7V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTY	-	XC6222D281PR-G	LVR-IC	LDO, 2.8V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NTZ	-	XC6222D291PR-G	LVR-IC	LDO, 2.9V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NU8	-	XC6222D08BPR-G	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NU9	-	XC6222D09BPR-G	LVR-IC	LDO, 0.95V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUA	-	XC6222D10BPR-G	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUB	-	XC6222D11BPR-G	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUC	-	XC6222D12BPR-G	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUD	-	XC6222D13BPR-G	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUE	-	XC6222D14BPR-G	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUF	-	XC6222D15BPR-G	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUH	-	XC6222D16BPR-G	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUK	-	XC6222D17BPR-G	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUL	-	XC6222D18BPR-G	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUM	-	XC6222D19BPR-G	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUN	-	XC6222D20BPR-G	LVR-IC	LDO, 2.05V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUP	-	XC6222D21BPR-G	LVR-IC	LDO, 2.15V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUR	-	XC6222D22BPR-G	LVR-IC	LDO, 2.25V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUS	-	XC6222D23BPR-G	LVR-IC	LDO, 2.35V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUT	-	XC6222D24BPR-G	LVR-IC	LDO, 2.45V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUU	-	XC6222D25BPR-G	LVR-IC	LDO, 2.55V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUV	-	XC6222D26BPR-G	LVR-IC	LDO, 2.65V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUX	-	XC6222D27BPR-G	LVR-IC	LDO, 2.75V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUY	-	XC6222D28BPR-G	LVR-IC	LDO, 2.85V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NUZ	-	XC6222D29BPR-G	LVR-IC	LDO, 2.95V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NV0	-	XC6222D301PR-G	LVR-IC	LDO, 3.0V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NV1	-	XC6222D311PR-G	LVR-IC	LDO, 3.1V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NV2	-	XC6222D321PR-G	LVR-IC	LDO, 3.2V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NV3	-	XC6222D331PR-G	LVR-IC	LDO, 3.3V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NV4	-	XC6222D341PR-G	LVR-IC	LDO, 3.4V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NV5	-	XC6222D351PR-G	LVR-IC	LDO, 3.5V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NV6	-	XC6222D361PR-G	LVR-IC	LDO, 3.6V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NV7	-	XC6222D371PR-G	LVR-IC	LDO, 3.7V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NV8	-	XC6222D381PR-G	LVR-IC	LDO, 3.8V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NV9	-	XC6222D391PR-G	LVR-IC	LDO, 3.9V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NVA	-	XC6222D401PR-G	LVR-IC	LDO, 4.0V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NVB	-	XC6222D411PR-G	LVR-IC	LDO, 4.1V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NVC	-	XC6222D421PR-G	LVR-IC	LDO, 4.2V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NVD	-	XC6222D431PR-G	LVR-IC	LDO, 4.3V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NVE	-	XC6222D441PR-G	LVR-IC	LDO, 4.4V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NVF	-	XC6222D451PR-G	LVR-IC	LDO, 4.5V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NVH	-	XC6222D461PR-G	LVR-IC	LDO, 4.6V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NVK	-	XC6222D471PR-G	LVR-IC	LDO, 4.7V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NVL	-	XC6222D481PR-G	LVR-IC	LDO, 4.8V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NVM	-	XC6222D491PR-G	LVR-IC	LDO, 4.9V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NVN	-	XC6222D501PR-G	LVR-IC	LDO, 5.0V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NX0	-	XC6222D30BPR-G	LVR-IC	LDO, 3.05V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NX1	-	XC6222D31BPR-G	LVR-IC	LDO, 3.15V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NX2	-	XC6222D32BPR-G	LVR-IC	LDO, 3.25V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NX3	-	XC6222D33BPR-G	LVR-IC	LDO, 3.35V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NX4	-	XC6222D34BPR-G	LVR-IC	LDO, 3.45V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NX5	-	XC6222D35BPR-G	LVR-IC	LDO, 3.55V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NX6	-	XC6222D36BPR-G	LVR-IC	LDO, 3.65V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NX7	-	XC6222D37BPR-G	LVR-IC	LDO, 3.75V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NX8	-	XC6222D38BPR-G	LVR-IC	LDO, 3.85V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NX9	-	XC6222D39BPR-G	LVR-IC	LDO, 3.95V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NXA	-	XC6222D40BPR-G	LVR-IC	LDO, 4.05V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NXB	-	XC6222D41BPR-G	LVR-IC	LDO, 4.15V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NXC	-	XC6222D42BPR-G	LVR-IC	LDO, 4.25V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NXD	-	XC6222D43BPR-G	LVR-IC	LDO, 4.35V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NXE	-	XC6222D44BPR-G	LVR-IC	LDO, 4.45V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NXF	-	XC6222D45BPR-G	LVR-IC	LDO, 4.55V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NXH	-	XC6222D46BPR-G	LVR-IC	LDO, 4.65V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NXK	-	XC6222D47BPR-G	LVR-IC	LDO, 4.75V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NXL	-	XC6222D48BPR-G	LVR-IC	LDO, 4.85V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
NXM	-	XC6222D49BPR-G	LVR-IC	LDO, 4.95V±1%, 700mA, +CE, CL, PDR	SOT-89-5	32vy	VR4	6n	Tor
OTA	-	S-1170B15UC-OTATF	LVR-IC	LDO, 1.5V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTB	-	S-1170B16UC-OTBTF	LVR-IC	LDO, 1.6V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTC	-	S-1170B17UC-OTCTF	LVR-IC	LDO, 1.7V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTD	-	S-1170B18UC-OTDTF	LVR-IC	LDO, 1.8V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTE	-	S-1170B19UC-OTETF	LVR-IC	LDO, 1.9V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTF	-	S-1170B20UC-OTFTF	LVR-IC	LDO, 2.0V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTG	-	S-1170B21UC-OTGTF	LVR-IC	LDO, 2.1V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTH	-	S-1170B22UC-OTHTF	LVR-IC	LDO, 2.2V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTI	-	S-1170B23UC-OTITF	LVR-IC	LDO, 2.3V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTJ	-	S-1170B24UC-OTJTF	LVR-IC	LDO, 2.4V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTK	-	S-1170B25UC-OTKTF	LVR-IC	LDO, 2.5V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTL	-	S-1170B26UC-OTLTF	LVR-IC	LDO, 2.6V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTM	-	S-1170B27UC-OTMTF	LVR-IC	LDO, 2.7V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTN	-	S-1170B28UC-OTNTF	LVR-IC	LDO, 2.8V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTO	-	S-1170B29UC-OTOTF	LVR-IC	LDO, 2.9V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTP	-	S-1170B30UC-OTPTF	LVR-IC	LDO, 3.0V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTQ	-	S-1170B31UC-OTQTF	LVR-IC	LDO, 3.1V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTR	-	S-1170B32UC-OTRTF	LVR-IC	LDO, 3.2V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTS	-	S-1170B33UC-OTSTF	LVR-IC	LDO, 3.3V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTT	-	S-1170B34UC-OTTTF	LVR-IC	LDO, 3.4V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTU	-	S-1170B35UC-OTUTF	LVR-IC	LDO, 3.5V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTV	-	S-1170B36UC-OTVTF	LVR-IC	LDO, 3.6V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTW	-	S-1170B37UC-OTWTF	LVR-IC	LDO, 3.7V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTX	-	S-1170B38UC-OTXTF	LVR-IC	LDO, 3.8V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTY	-	S-1170B39UC-OTYTF	LVR-IC	LDO, 3.9V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OTZ	-	S-1170B40UC-OTZTF	LVR-IC	LDO, 4.0V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OUA	-	S-1170B41UC-OUATF	LVR-IC	LDO, 4.1V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OUB	-	S-1170B42UC-OUBTF	LVR-IC	LDO, 4.2V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OUC	-	S-1170B43UC-OUCTF	LVR-IC	LDO, 4.3V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OUD	-	S-1170B44UC-OUDTF	LVR-IC	LDO, 4.4V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OUE	-	S-1170B45UC-OUETF	LVR-IC	LDO, 4.5V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OUF	-	S-1170B46UC-OUFTF	LVR-IC	LDO, 4.6V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OUG	-	S-1170B47UC-OUGTF	LVR-IC	LDO, 4.7V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OUH	-	S-1170B48UC-OUHTF	LVR-IC	LDO, 4.8V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OUI	-	S-1170B49UC-OUITF	LVR-IC	LDO, 4.9V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OUJ	-	S-1170B50UC-OUJTF	LVR-IC	LDO, 5.0V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OUK	-	S-1170B51UC-OUKTF	LVR-IC	LDO, 5.1V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OUL	-	S-1170B52UC-OULTF	LVR-IC	LDO, 5.2V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OUM	-	S-1170B53UC-OUMTF	LVR-IC	LDO, 5.3V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OUN	-	S-1170B54UC-OUNTF	LVR-IC	LDO, 5.4V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
OUO	-	S-1170B55UC-OUOTF	LVR-IC	LDO, 5.5V±1.0%, 800mA, +CE	SOT-89-5	32vy	VR4	6n	Sii
P10A	-	FC6204A192P	LVR-IC	LDO, 1.9V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P10A	-	ML6204A192P	LVR-IC	LDO, 1.9V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P10B	-	FC6204B192P	LVR-IC	LDO, 1.9V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P10B	-	ML6204B192P	LVR-IC	LDO, 1.9V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P10C	-	FC6204C192P	LVR-IC	LDO, 1.9V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P10C	-	ML6204C192P	LVR-IC	LDO, 1.9V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P10D	-	FC6204D192P	LVR-IC	LDO, 1.9V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P10D	-	ML6204D192P	LVR-IC	LDO, 1.9V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P15A	-	CM7R151A-15B-P	LVR-IC	LDO, 1.5V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P15A	-	FC6204A152P	LVR-IC	LDO, 1.5V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P15A	-	ML6204A152P	LVR-IC	LDO, 1.5V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P15B	-	CM7R151B-15B-P	LVR-IC	LDO, 1.5V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P15B	-	FC6204B152P	LVR-IC	LDO, 1.5V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P15B	-	ML6204B152P	LVR-IC	LDO, 1.5V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P15C	-	CM7R151C-15B-P	LVR-IC	LDO, 1.5V±3%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P15C	-	FC6204C152P	LVR-IC	LDO, 1.5V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P15C	-	ML6204C152P	LVR-IC	LDO, 1.5V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P15D	-	CM7R151D-15B-P	LVR-IC	LDO, 1.5V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P15D	-	FC6204D152P	LVR-IC	LDO, 1.5V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P15D	-	ML6204D152P	LVR-IC	LDO, 1.5V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P16A	-	CM7R151A-16B-P	LVR-IC	LDO, 1.6V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P16A	-	FC6204A162P	LVR-IC	LDO, 1.6V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P16A	-	ML6204A162P	LVR-IC	LDO, 1.6V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P16B	-	CM7R151B-16B-P	LVR-IC	LDO, 1.6V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P16B	-	FC6204B162P	LVR-IC	LDO, 1.6V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P16B	-	ML6204B162P	LVR-IC	LDO, 1.6V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P16C	-	CM7R151C-16B-P	LVR-IC	LDO, 1.6V±3%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P16C	-	FC6204C162P	LVR-IC	LDO, 1.6V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P16C	-	ML6204C162P	LVR-IC	LDO, 1.6V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P16D	-	CM7R151D-16B-P	LVR-IC	LDO, 1.6V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P16D	-	FC6204D162P	LVR-IC	LDO, 1.6V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P16D	-	ML6204D162P	LVR-IC	LDO, 1.6V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P17A	-	CM7R151A-17B-P	LVR-IC	LDO, 1.7V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P17A	-	FC6204A172P	LVR-IC	LDO, 1.7V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P17A	-	ML6204A172P	LVR-IC	LDO, 1.7V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P17B	-	CM7R151B-17B-P	LVR-IC	LDO, 1.7V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P17B	-	FC6204B172P	LVR-IC	LDO, 1.7V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P17B	-	ML6204B172P	LVR-IC	LDO, 1.7V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P17C	-	CM7R151C-17B-P	LVR-IC	LDO, 1.7V±3%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P17C	-	FC6204C172P	LVR-IC	LDO, 1.7V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P17C	-	ML6204C172P	LVR-IC	LDO, 1.7V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P17D	-	CM7R151D-17B-P	LVR-IC	LDO, 1.7V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P17D	-	FC6204D172P	LVR-IC	LDO, 1.7V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P17D	-	ML6204D172P	LVR-IC	LDO, 1.7V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P18A	-	CM7R151A-18B-P	LVR-IC	LDO, 1.8V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P18B	-	CM7R151B-18B-P	LVR-IC	LDO, 1.8V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P18C	-	CM7R151C-18B-P	LVR-IC	LDO, 1.8V±3%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P18D	-	CM7R151D-18B-P	LVR-IC	LDO, 1.8V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P19A	-	CM7R151A-19B-P	LVR-IC	LDO, 1.9V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P19A	-	FC6204A182P	LVR-IC	LDO, 1.8V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P19A	-	ML6204A182P	LVR-IC	LDO, 1.8V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P19B	-	CM7R151B-19B-P	LVR-IC	LDO, 1.9V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P19B	-	FC6204B182P	LVR-IC	LDO, 1.8V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P19B	-	ML6204B182P	LVR-IC	LDO, 1.8V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P19C	-	CM7R151C-19B-P	LVR-IC	LDO, 1.9V±3%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P19C	-	FC6204C182P	LVR-IC	LDO, 1.8V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P19C	-	ML6204C182P	LVR-IC	LDO, 1.8V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P19D	-	CM7R151D-19B-P	LVR-IC	LDO, 1.9V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P19D	-	FC6204D182P	LVR-IC	LDO, 1.8V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P19D	-	ML6204D182P	LVR-IC	LDO, 1.8V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P1FA	-	CM7R151A-15A-P	LVR-IC	LDO, 1.55V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P1FA	-	FC6204A15AP	LVR-IC	LDO, 1.55V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P1FA	-	ML6204A15AP	LVR-IC	LDO, 1.55V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P1FB	-	CM7R151B-15A-P	LVR-IC	LDO, 1.55V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P1FB	-	FC6204B15AP	LVR-IC	LDO, 1.55V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P1FB	-	ML6204B15AP	LVR-IC	LDO, 1.55V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P1FC	-	CM7R151C-15A-P	LVR-IC	LDO, 1.55V±3%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P1FC	-	FC6204C15AP	LVR-IC	LDO, 1.55V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P1FC	-	ML6204C15AP	LVR-IC	LDO, 1.55V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P1FD	-	CM7R151D-15A-P	LVR-IC	LDO, 1.55V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P1FD	-	FC6204D15AP	LVR-IC	LDO, 1.55V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P1FD	-	ML6204D15AP	LVR-IC	LDO, 1.55V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P1GA	-	CM7R151A-16A-P	LVR-IC	LDO, 1.65V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P1GA	-	FC6204A16AP	LVR-IC	LDO, 1.65V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P1GA	-	ML6204A16AP	LVR-IC	LDO, 1.65V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P1GB	-	CM7R151B-16A-P	LVR-IC	LDO, 1.65V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P1GB	-	FC6204B16AP	LVR-IC	LDO, 1.65V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P1GB	-	ML6204B16AP	LVR-IC	LDO, 1.65V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P1GC	-	CM7R151C-16A-P	LVR-IC	LDO, 1.65V±3%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P1GC	-	FC6204C16AP	LVR-IC	LDO, 1.65V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P1GC	-	ML6204C16AP	LVR-IC	LDO, 1.65V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P1GD	-	CM7R151D-16A-P	LVR-IC	LDO, 1.65V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P1GD	-	FC6204D16AP	LVR-IC	LDO, 1.65V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P1GD	-	ML6204D16AP	LVR-IC	LDO, 1.65V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P1HA	-	CM7R151A-17A-P	LVR-IC	LDO, 1.75V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P1HA	-	FC6204A17AP	LVR-IC	LDO, 1.75V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P1HA	-	ML6204A17AP	LVR-IC	LDO, 1.75V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P1HB	-	CM7R151B-17A-P	LVR-IC	LDO, 1.75V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P1HB	-	FC6204B17AP	LVR-IC	LDO, 1.75V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P1HB	-	ML6204B17AP	LVR-IC	LDO, 1.75V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P1HC	-	CM7R151C-17A-P	LVR-IC	LDO, 1.75V±3%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P1HC	-	FC6204C17AP	LVR-IC	LDO, 1.75V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P1HC	-	ML6204C17AP	LVR-IC	LDO, 1.75V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P1HD	-	CM7R151D-17A-P	LVR-IC	LDO, 1.75V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P1HD	-	FC6204D17AP	LVR-IC	LDO, 1.75V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P1HD	-	ML6204D17AP	LVR-IC	LDO, 1.75V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P1IA	-	CM7R151A-18A-P	LVR-IC	LDO, 1.85V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P1IA	-	FC6204A18AP	LVR-IC	LDO, 1.85V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P1IA	-	ML6204A18AP	LVR-IC	LDO, 1.85V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P1IB	-	CM7R151B-18A-P	LVR-IC	LDO, 1.85V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P1IB	-	FC6204B18AP	LVR-IC	LDO, 1.85V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P1IB	-	ML6204B18AP	LVR-IC	LDO, 1.85V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P1IC	-	CM7R151C-18A-P	LVR-IC	LDO, 1.85V±3%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P1IC	-	FC6204C18AP	LVR-IC	LDO, 1.85V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P1IC	-	ML6204C18AP	LVR-IC	LDO, 1.85V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P1ID	-	CM7R151D-18A-P	LVR-IC	LDO, 1.85V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P1ID	-	FC6204D18AP	LVR-IC	LDO, 1.85V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P1ID	-	ML6204D18AP	LVR-IC	LDO, 1.85V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P1JA	-	CM7R151A-19A-P	LVR-IC	LDO, 1.95V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P1JA	-	FC6204A19AP	LVR-IC	LDO, 1.95V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P1JA	-	ML6204A19AP	LVR-IC	LDO, 1.95V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P1JB	-	CM7R151B-19A-P	LVR-IC	LDO, 1.95V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P1JB	-	FC6204B19AP	LVR-IC	LDO, 1.95V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P1JB	-	ML6204B19AP	LVR-IC	LDO, 1.95V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P1JC	-	CM7R151C-19A-P	LVR-IC	LDO, 1.95V±3%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P1JC	-	FC6204C19AP	LVR-IC	LDO, 1.95V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P1JC	-	ML6204C19AP	LVR-IC	LDO, 1.95V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P1JD	-	CM7R151D-19A-P	LVR-IC	LDO, 1.95V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P1JD	-	FC6204D19AP	LVR-IC	LDO, 1.95V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P1JD	-	ML6204D19AP	LVR-IC	LDO, 1.95V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P20	-	TK11220AU	LVR-IC	LDO, 2.0V±2.4%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
P20	kb	XC6382F201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P20A	-	CM7R151A-20B-P	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P20A	-	FC6204A202P	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P20A	-	ML6204A202P	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P20B	-	CM7R151B-20B-P	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P20B	-	FC6204B202P	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P20B	-	ML6204B202P	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P20C	-	CM7R151C-20B-P	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P20C	-	FC6204C202P	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P20C	-	ML6204C202P	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P20D	-	CM7R151D-20B-P	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P20D	-	FC6204D202P	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P20D	-	ML6204D202P	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P21	kb	XC6382F211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P21A	-	CM7R151A-21B-P	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P21A	-	FC6204A212P	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P21A	-	ML6204A212P	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P21B	-	CM7R151B-21B-P	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P21B	-	FC6204B212P	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P21B	-	ML6204B212P	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P21C	-	CM7R151C-21B-P	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P21C	-	FC6204C212P	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P21C	-	ML6204C212P	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P21D	-	CM7R151D-21B-P	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P21D	-	FC6204D212P	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P21D	-	ML6204D212P	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P22	-	TK11222AU	LVR-IC	LDO, 2.2V±2.4%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
P22	kb	XC6382F221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P22A	-	CM7R151A-22B-P	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P22A	-	FC6204A222P	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P22A	-	ML6204A222P	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P22B	-	CM7R151B-22B-P	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P22B	-	FC6204B222P	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P22B	-	ML6204B222P	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P22C	-	CM7R151C-22B-P	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P22C	-	FC6204C222P	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P22C	-	ML6204C222P	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P22D	-	CM7R151D-22B-P	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P22D	-	FC6204D222P	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P22D	-	ML6204D222P	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P23	kb	XC6382F231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P23A	-	CM7R151A-23B-P	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P23A	-	FC6204A232P	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P23A	-	ML6204A232P	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P23B	-	CM7R151B-23B-P	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P23B	-	FC6204B232P	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P23B	-	ML6204B232P	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P23C	-	CM7R151C-23B-P	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P23C	-	FC6204C232P	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P23C	-	ML6204C232P	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P23D	-	CM7R151D-23B-P	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P23D	-	FC6204D232P	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P23D	-	ML6204D232P	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P24	kb	XC6382F241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P24A	-	CM7R151A-24B-P	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P24A	-	FC6204A242P	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P24A	-	ML6204A242P	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P24B	-	CM7R151B-24B-P	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P24B	-	FC6204B242P	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P24B	-	ML6204B242P	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P24C	-	CM7R151C-24B-P	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P24C	-	FC6204C242P	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P24C	-	ML6204C242P	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P24D	-	CM7R151D-24B-P	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P24D	-	FC6204D242P	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P24D	-	ML6204D242P	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P25	-	TK11225AU	LVR-IC	LDO, 2.5V±2.4%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
P25	kb	XC6382F251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P25A	-	CM7R151A-25B-P	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P25A	-	FC6204A252P	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P25A	-	ML6204A252P	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P25B	-	CM7R151B-25B-P	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P25B	-	FC6204B252P	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P25B	-	ML6204B252P	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P25C	-	CM7R151C-25B-P	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P25C	-	FC6204C252P	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P25C	-	ML6204C252P	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P25D	-	CM7R151D-25B-P	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P25D	-	FC6204D252P	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P25D	-	ML6204D252P	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P26	kb	XC6382F261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P26A	-	CM7R151A-26B-P	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P26A	-	FC6204A262P	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P26A	-	ML6204A262P	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P26B	-	CM7R151B-26B-P	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P26B	-	FC6204B262P	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P26B	-	ML6204B262P	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P26C	-	CM7R151C-26B-P	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P26C	-	FC6204C262P	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P26C	-	ML6204C262P	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P26D	-	CM7R151D-26B-P	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P26D	-	FC6204D262P	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P26D	-	ML6204D262P	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P27	kb	XC6382F271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P27A	-	CM7R151A-27B-P	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P27A	-	FC6204A272P	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P27A	-	ML6204A272P	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P27B	-	CM7R151B-27B-P	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P27B	-	FC6204B272P	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P27B	-	ML6204B272P	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P27C	-	CM7R151C-27B-P	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P27C	-	FC6204C272P	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P27C	-	ML6204C272P	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P27D	-	CM7R151D-27B-P	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P27D	-	FC6204D272P	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P27D	-	ML6204D272P	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P28	-	TK11228AU	LVR-IC	LDO, 2.8V±2.4%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
P28	kb	XC6382F281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P28A	-	CM7R151A-28B-P	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P28A	-	FC6204A282P	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P28A	-	ML6204A282P	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P28B	-	CM7R151B-28B-P	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P28B	-	FC6204B282P	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P28B	-	ML6204B282P	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P28C	-	CM7R151C-28B-P	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P28C	-	FC6204C282P	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P28C	-	ML6204C282P	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P28D	-	CM7R151D-28B-P	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P28D	-	FC6204D282P	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P28D	-	ML6204D282P	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P29	kb	XC6382F291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P29A	-	CM7R151A-29B-P	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P29A	-	FC6204A292P	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P29A	-	ML6204A292P	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P29B	-	CM7R151B-29B-P	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P29B	-	FC6204B292P	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P29B	-	ML6204B292P	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P29C	-	CM7R151C-29B-P	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P29C	-	FC6204C292P	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P29C	-	ML6204C292P	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P29D	-	CM7R151D-29B-P	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P29D	-	FC6204D292P	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P29D	-	ML6204D292P	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P2AA	-	CM7R151A-20A-P	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2AA	-	FC6204A20AP	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P2AA	-	ML6204A20AP	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P2AB	-	CM7R151B-20A-P	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P2AB	-	FC6204B20AP	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P2AB	-	ML6204B20AP	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P2AC	-	CM7R151C-20A-P	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2AC	-	FC6204C20AP	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P2AC	-	ML6204C20AP	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P2AD	-	CM7R151D-20A-P	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P2AD	-	FC6204D20AP	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P2AD	-	ML6204D20AP	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P2BA	-	CM7R151A-21A-P	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2BA	-	FC6204A21AP	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P2BA	-	ML6204A21AP	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P2BB	-	CM7R151B-21A-P	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P2BB	-	FC6204B21AP	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P2BB	-	ML6204B21AP	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P2BC	-	CM7R151C-21A-P	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2BC	-	FC6204C21AP	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P2BC	-	ML6204C21AP	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P2BD	-	CM7R151D-21A-P	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P2BD	-	FC6204D21AP	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P2BD	-	ML6204D21AP	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P2CA	-	CM7R151A-22A-P	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2CA	-	FC6204A22AP	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P2CA	-	ML6204A22AP	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P2CB	-	CM7R151B-22A-P	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P2CB	-	FC6204B22AP	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P2CB	-	ML6204B22AP	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P2CC	-	CM7R151C-22A-P	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P2CC	-	FC6204C22AP	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P2CC	-	ML6204C22AP	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P2CD	-	CM7R151D-22A-P	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P2CD	-	FC6204D22AP	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P2CD	-	ML6204D22AP	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P2DA	-	CM7R151A-23A-P	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2DA	-	FC6204A23AP	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P2DA	-	ML6204A23AP	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P2DB	-	CM7R151B-23A-P	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P2DB	-	FC6204B23AP	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P2DB	-	ML6204B23AP	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P2DC	-	CM7R151C-23A-P	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2DC	-	FC6204C23AP	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P2DC	-	ML6204C23AP	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P2DD	-	CM7R151D-23A-P	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P2DD	-	FC6204D23AP	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P2DD	-	ML6204D23AP	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P2EA	-	CM7R151A-24A-P	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2EA	-	FC6204A24AP	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P2EA	-	ML6204A24AP	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P2EB	-	CM7R151B-24A-P	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P2EB	-	FC6204B24AP	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P2EB	-	ML6204B24AP	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P2EC	-	CM7R151C-24A-P	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2EC	-	FC6204C24AP	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P2EC	-	ML6204C24AP	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P2ED	-	CM7R151D-24A-P	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P2ED	-	FC6204D24AP	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P2ED	-	ML6204D24AP	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P2FA	-	CM7R151A-25A-P	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2FA	-	FC6204A25AP	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P2FA	-	ML6204A25AP	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P2FB	-	CM7R151B-25A-P	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P2FB	-	FC6204B25AP	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P2FB	-	ML6204B25AP	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P2FC	-	CM7R151C-25A-P	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2FC	-	FC6204C25AP	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P2FC	-	ML6204C25AP	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P2FD	-	CM7R151D-25A-P	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P2FD	-	FC6204D25AP	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P2FD	-	ML6204D25AP	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P2GA	-	CM7R151A-26A-P	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2GA	-	FC6204A26AP	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P2GA	-	ML6204A26AP	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P2GB	-	CM7R151B-26A-P	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P2GB	-	FC6204B26AP	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P2GB	-	ML6204B26AP	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P2GC	-	CM7R151C-26A-P	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2GC	-	FC6204C26AP	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P2GC	-	ML6204C26AP	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P2GD	-	CM7R151D-26A-P	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P2GD	-	FC6204D26AP	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P2GD	-	ML6204D26AP	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P2HA	-	CM7R151A-27A-P	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2HA	-	FC6204A27AP	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P2HA	-	ML6204A27AP	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P2HB	-	CM7R151B-27A-P	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P2HB	-	FC6204B27AP	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P2HB	-	ML6204B27AP	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P2HC	-	CM7R151C-27A-P	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2HC	-	FC6204C27AP	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P2HC	-	ML6204C27AP	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P2HD	-	CM7R151D-27A-P	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P2HD	-	FC6204D27AP	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P2HD	-	ML6204D27AP	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P2IA	-	CM7R151A-28A-P	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2IA	-	FC6204A28AP	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P2IA	-	ML6204A28AP	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P2IB	-	CM7R151B-28A-P	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P2IB	-	FC6204B28AP	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P2IB	-	ML6204B28AP	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P2IC	-	CM7R151C-28A-P	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2IC	-	FC6204C28AP	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P2IC	-	ML6204C28AP	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P2ID	-	CM7R151D-28A-P	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P2ID	-	FC6204D28AP	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P2ID	-	ML6204D28AP	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P2JA	-	CM7R151A-29A-P	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2JA	-	FC6204A29AP	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P2JA	-	ML6204A29AP	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P2JB	-	CM7R151B-29A-P	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P2JB	-	FC6204B29AP	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P2JB	-	ML6204B29AP	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P2JC	-	CM7R151C-29A-P	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P2JC	-	FC6204C29AP	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P2JC	-	ML6204C29AP	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P2JD	-	CM7R151D-29A-P	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P2JD	-	FC6204D29AP	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P2JD	-	ML6204D29AP	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P30	-	TK11230AU	LVR-IC	LDO, 3.0V±2.4%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
P30	kb	XC6382F301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P30A	-	CM7R151A-30B-P	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P30A	-	FC6204A302P	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P30A	-	ML6204A302P	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P30B	-	CM7R151B-30B-P	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P30B	-	FC6204B302P	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P30B	-	ML6204B302P	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P30C	-	CM7R151C-30B-P	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P30C	-	FC6204C302P	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P30C	-	ML6204C302P	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P30D	-	CM7R151D-30B-P	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P30D	-	FC6204D302P	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P30D	-	ML6204D302P	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P31	-	TK11231AU	LVR-IC	LDO, 3.1V±2.4%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
P31	kb	XC6382F311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P3101C	-	PAM3101ECB150	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-89-5	32vr4	VR4	6q	Pam
P3101E	-	PAM3101ECB180	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-89-5	32vr4	VR4	6q	Pam
P3101G	-	PAM3101ECB250	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SOT-89-5	32vr4	VR4	6q	Pam
P3101H	-	PAM3101ECB280	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SOT-89-5	32vr4	VR4	6q	Pam
P3101I	-	PAM3101ECB285	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SOT-89-5	32vr4	VR4	6q	Pam
P3101J	-	PAM3101ECB300	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SOT-89-5	32vr4	VR4	6q	Pam
P3101K	-	PAM3101ECB330	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SOT-89-5	32vr4	VR4	6q	Pam
P3101M	-	PAM3101ECB400	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	SOT-89-5	32vr4	VR4	6q	Pam
P3101O	-	PAM3101ECB380	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	SOT-89-5	32vr4	VR4	6q	Pam
P3101P	-	PAM3101ECB310	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SOT-89-5	32vr4	VR4	6q	Pam
P3101Q	-	PAM3101ECB290	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SOT-89-5	32vr4	VR4	6q	Pam
P3101T	-	PAM3101ECB475	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	SOT-89-5	32vr4	VR4	6q	Pam
P31A	-	CM7R151A-31B-P	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P31A	-	FC6204A312P	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P31A	-	ML6204A312P	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P31B	-	CM7R151B-31B-P	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P31B	-	FC6204B312P	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P31B	-	ML6204B312P	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P31C	-	CM7R151C-31B-P	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P31C	-	FC6204C312P	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P31C	-	ML6204C312P	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P31D	-	CM7R151D-31B-P	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P31D	-	FC6204D312P	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P31D	-	ML6204D312P	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P32	kb	XC6382F321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P32A	-	CM7R151A-32B-P	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P32A	-	FC6204A322P	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P32A	-	ML6204A322P	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P32B	-	CM7R151B-32B-P	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P32B	-	FC6204B322P	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P32B	-	ML6204B322P	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P32C	-	CM7R151C-32B-P	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P32C	-	FC6204C322P	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P32C	-	ML6204C322P	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P32D	-	CM7R151D-32B-P	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P32D	-	FC6204D322P	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P32D	-	ML6204D322P	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P33	-	TK11233AU	LVR-IC	LDO, 3.3V±2.4%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
P33	kb	XC6382F331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P33A	-	CM7R151A-33B-P	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P33A	-	FC6204A332P	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P33A	-	ML6204A332P	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P33B	-	CM7R151B-33B-P	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P33B	-	FC6204B332P	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P33B	-	ML6204B332P	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P33C	-	CM7R151C-33B-P	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P33C	-	FC6204C332P	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P33C	-	ML6204C332P	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P33D	-	CM7R151D-33B-P	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P33D	-	FC6204D332P	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P33D	-	ML6204D332P	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P34	kb	XC6382F341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P34A	-	CM7R151A-34B-P	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P34A	-	FC6204A342P	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P34A	-	ML6204A342P	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P34B	-	CM7R151B-34B-P	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P34B	-	FC6204B342P	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P34B	-	ML6204B342P	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P34C	-	CM7R151C-34B-P	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P34C	-	FC6204C342P	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P34C	-	ML6204C342P	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P34D	-	CM7R151D-34B-P	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P34D	-	FC6204D342P	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P34D	-	ML6204D342P	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P35	-	TK11235AU	LVR-IC	LDO, 3.5V±2.4%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
P35	kb	XC6382F351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P35A	-	CM7R151A-35B-P	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P35A	-	FC6204A352P	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P35A	-	ML6204A352P	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P35B	-	CM7R151B-35B-P	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P35B	-	FC6204B352P	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P35B	-	ML6204B352P	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P35C	-	CM7R151C-35B-P	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P35C	-	FC6204C352P	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P35C	-	ML6204C352P	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P35D	-	CM7R151D-35B-P	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P35D	-	FC6204D352P	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P35D	-	ML6204D352P	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P36	-	TK11236AU	LVR-IC	LDO, 3.6V±2.4%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
P36	kb	XC6382F361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P36A	-	CM7R151A-36B-P	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P36A	-	FC6204A362P	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P36A	-	ML6204A362P	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P36B	-	CM7R151B-36B-P	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P36B	-	FC6204B362P	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P36B	-	ML6204B362P	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P36C	-	CM7R151C-36B-P	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P36C	-	FC6204C362P	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P36C	-	ML6204C362P	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P36D	-	CM7R151D-36B-P	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P36D	-	FC6204D362P	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P36D	-	ML6204D362P	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P37	kb	XC6382F371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P37A	-	CM7R151A-37B-P	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDRV	SOT-89-5	32um	VR4	6j	Can
P37A	-	FC6204A372P	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P37A	-	ML6204A372P	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P37B	-	CM7R151B-37B-P	LVR-IC	LDO, 3.7V±2%, 150mA, +CEV	SOT-89-5	32um	VR4	6j	Can
P37B	-	FC6204B372P	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P37B	-	ML6204B372P	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P37C	-	CM7R151C-37B-P	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PDRV	SOT-89-5	32um	VR4	6j	Can
P37C	-	FC6204C372P	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P37C	-	ML6204C372P	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P37D	-	CM7R151D-37B-P	LVR-IC	LDO, 3.7V±2%, 150mA, -CEV	SOT-89-5	32um	VR4	6j	Can
P37D	-	FC6204D372P	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P37D	-	ML6204D372P	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P38	-	TK11238AU	LVR-IC	LDO, 3.8V±2.4%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
P38	kb	XC6382F381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P38A	-	CM7R151A-38B-P	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P38A	-	FC6204A382P	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P38A	-	ML6204A382P	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P38B	-	CM7R151B-38B-P	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P38B	-	FC6204B382P	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P38B	-	ML6204B382P	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P38C	-	CM7R151C-38B-P	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P38C	-	FC6204C382P	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P38C	-	ML6204C382P	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P38D	-	CM7R151D-38B-P	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P38D	-	FC6204D382P	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P38D	-	ML6204D382P	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P39	kb	XC6382F391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P39A	-	CM7R151A-39B-P	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P39A	-	FC6204A392P	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P39A	-	ML6204A392P	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P39B	-	CM7R151B-39B-P	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P39B	-	FC6204B392P	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P39B	-	ML6204B392P	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P39C	-	CM7R151C-39B-P	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P39C	-	FC6204C392P	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P39C	-	ML6204C392P	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P39D	-	CM7R151D-39B-P	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P39D	-	FC6204D392P	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P39D	-	ML6204D392P	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P3AA	-	CM7R151A-30A-P	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3AA	-	FC6204A30AP	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P3AA	-	ML6204A30AP	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P3AB	-	CM7R151B-30A-P	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P3AB	-	FC6204B30AP	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P3AB	-	ML6204B30AP	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P3AC	-	CM7R151C-30A-P	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3AC	-	FC6204C30AP	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P3AC	-	ML6204C30AP	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P3AD	-	CM7R151D-30A-P	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P3AD	-	FC6204D30AP	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P3AD	-	ML6204D30AP	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P3BA	-	CM7R151A-31A-P	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3BA	-	FC6204A31AP	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P3BA	-	ML6204A31AP	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P3BB	-	CM7R151B-31A-P	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P3BB	-	FC6204B31AP	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P3BB	-	ML6204B31AP	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P3BC	-	CM7R151C-31A-P	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3BC	-	FC6204C31AP	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P3BC	-	ML6204C31AP	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P3BD	-	CM7R151D-31A-P	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P3BD	-	FC6204D31AP	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P3BD	-	ML6204D31AP	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P3CA	-	CM7R151A-32A-P	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3CA	-	FC6204A32AP	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P3CA	-	ML6204A32AP	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P3CB	-	CM7R151B-32A-P	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P3CB	-	FC6204B32AP	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P3CB	-	ML6204B32AP	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P3CC	-	CM7R151C-32A-P	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3CC	-	FC6204C32AP	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P3CC	-	ML6204C32AP	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P3CD	-	CM7R151D-32A-P	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P3CD	-	FC6204D32AP	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P3CD	-	ML6204D32AP	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P3DA	-	CM7R151A-33A-P	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3DA	-	FC6204A33AP	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P3DA	-	ML6204A33AP	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P3DB	-	CM7R151B-33A-P	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P3DB	-	FC6204B33AP	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P3DB	-	ML6204B33AP	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P3DC	-	CM7R151C-33A-P	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P3DC	-	FC6204C33AP	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P3DC	-	ML6204C33AP	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P3DD	-	CM7R151D-33A-P	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P3DD	-	FC6204D33AP	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P3DD	-	ML6204D33AP	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P3EA	-	CM7R151A-34A-P	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3EA	-	FC6204A34AP	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P3EA	-	ML6204A34AP	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P3EB	-	CM7R151B-34A-P	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P3EB	-	FC6204B34AP	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P3EB	-	ML6204B34AP	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P3EC	-	CM7R151C-34A-P	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3EC	-	FC6204C34AP	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P3EC	-	ML6204C34AP	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P3ED	-	CM7R151D-34A-P	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P3ED	-	FC6204D34AP	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P3ED	-	ML6204D34AP	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P3FA	-	CM7R151A-35A-P	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3FA	-	FC6204A35AP	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P3FA	-	ML6204A35AP	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P3FB	-	CM7R151B-35A-P	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P3FB	-	FC6204B35AP	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P3FB	-	ML6204B35AP	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P3FC	-	CM7R151C-35A-P	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3FC	-	FC6204C35AP	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P3FC	-	ML6204C35AP	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P3FD	-	CM7R151D-35A-P	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P3FD	-	FC6204D35AP	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P3FD	-	ML6204D35AP	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P3GA	-	CM7R151A-36A-P	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3GA	-	FC6204A36AP	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P3GA	-	ML6204A36AP	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P3GB	-	CM7R151B-36A-P	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P3GB	-	FC6204B36AP	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P3GB	-	ML6204B36AP	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P3GC	-	CM7R151C-36A-P	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3GC	-	FC6204C36AP	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P3GC	-	ML6204C36AP	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P3GD	-	CM7R151D-36A-P	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P3GD	-	FC6204D36AP	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P3GD	-	ML6204D36AP	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P3HA	-	CM7R151A-37A-P	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3HA	-	FC6204A37AP	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P3HA	-	ML6204A37AP	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P3HB	-	CM7R151B-37A-P	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P3HB	-	FC6204B37AP	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P3HB	-	ML6204B37AP	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P3HC	-	CM7R151C-37A-P	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3HC	-	FC6204C37AP	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P3HC	-	ML6204C37AP	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P3HD	-	CM7R151D-37A-P	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P3HD	-	FC6204D37AP	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P3HD	-	ML6204D37AP	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P3IA	-	CM7R151A-38A-P	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3IA	-	FC6204A38AP	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P3IA	-	ML6204A38AP	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P3IB	-	CM7R151B-38A-P	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P3IB	-	FC6204B38AP	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P3IB	-	ML6204B38AP	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P3IC	-	CM7R151C-38A-P	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3IC	-	FC6204C38AP	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P3IC	-	ML6204C38AP	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P3ID	-	CM7R151D-38A-P	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P3ID	-	FC6204D38AP	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P3ID	-	ML6204D38AP	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P3JA	-	CM7R151A-39A-P	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3JA	-	FC6204A39AP	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P3JA	-	ML6204A39AP	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P3JB	-	CM7R151B-39A-P	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P3JB	-	FC6204B39AP	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P3JB	-	ML6204B39AP	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P3JC	-	CM7R151C-39A-P	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P3JC	-	FC6204C39AP	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P3JC	-	ML6204C39AP	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P3JD	-	CM7R151D-39A-P	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P3JD	-	FC6204D39AP	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P3JD	-	ML6204D39AP	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P40	-	TK11240AU	LVR-IC	LDO, 4.0V±2.4%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
P40	kb	XC6382F401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P40A	-	CM7R151A-40B-P	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P40A	-	FC6204A402P	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P40A	-	ML6204A402P	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P40B	-	CM7R151B-40B-P	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P40B	-	FC6204B402P	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P40B	-	ML6204B402P	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P40C	-	CM7R151C-40B-P	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P40C	-	FC6204C402P	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P40C	-	ML6204C402P	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P40D	-	CM7R151D-40B-P	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P40D	-	FC6204D402P	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P40D	-	ML6204D402P	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P41	kb	XC6382F411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P41A	-	CM7R151A-41B-P	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P41A	-	FC6204A412P	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P41A	-	ML6204A412P	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P41B	-	CM7R151B-41B-P	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P41B	-	FC6204B412P	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P41B	-	ML6204B412P	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P41C	-	CM7R151C-41B-P	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P41C	-	FC6204C412P	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P41C	-	ML6204C412P	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P41D	-	CM7R151D-41B-P	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P41D	-	FC6204D412P	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P41D	-	ML6204D412P	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P42	kb	XC6382F421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P42A	-	CM7R151A-42B-P	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P42A	-	FC6204A422P	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P42A	-	ML6204A422P	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P42B	-	CM7R151B-42B-P	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P42B	-	FC6204B422P	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P42B	-	ML6204B422P	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P42C	-	CM7R151C-42B-P	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P42C	-	FC6204C422P	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P42C	-	ML6204C422P	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P42D	-	CM7R151D-42B-P	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P42D	-	FC6204D422P	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P42D	-	ML6204D422P	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P43	kb	XC6382F431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P43A	-	CM7R151A-43B-P	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P43A	-	FC6204A432P	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P43A	-	ML6204A432P	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P43B	-	CM7R151B-43B-P	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P43B	-	FC6204B432P	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P43B	-	ML6204B432P	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P43C	-	CM7R151C-43B-P	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P43C	-	FC6204C432P	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P43C	-	ML6204C432P	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P43D	-	CM7R151D-43B-P	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P43D	-	FC6204D432P	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P43D	-	ML6204D432P	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P44	kb	XC6382F441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P44A	-	CM7R151A-44B-P	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P44A	-	FC6204A442P	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P44A	-	ML6204A442P	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P44B	-	CM7R151B-44B-P	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P44B	-	FC6204B442P	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P44B	-	ML6204B442P	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P44C	-	CM7R151C-44B-P	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P44C	-	FC6204C442P	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P44C	-	ML6204C442P	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P44D	-	CM7R151D-44B-P	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P44D	-	FC6204D442P	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P44D	-	ML6204D442P	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P45	-	TK11245AU	LVR-IC	LDO, 4.5V±2.4%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
P45	kb	XC6382F451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P45A	-	CM7R151A-45B-P	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P45A	-	FC6204A452P	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P45A	-	ML6204A452P	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P45B	-	CM7R151B-45B-P	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P45B	-	FC6204B452P	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P45B	-	ML6204B452P	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P45C	-	CM7R151C-45B-P	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P45C	-	FC6204C452P	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P45C	-	ML6204C452P	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P45D	-	CM7R151D-45B-P	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P45D	-	FC6204D452P	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P45D	-	ML6204D452P	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P46	kb	XC6382F461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P46A	-	CM7R151A-46B-P	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P46A	-	FC6204A462P	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P46A	-	ML6204A462P	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P46B	-	CM7R151B-46B-P	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P46B	-	FC6204B462P	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P46B	-	ML6204B462P	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P46C	-	CM7R151C-46B-P	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P46C	-	FC6204C462P	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P46C	-	ML6204C462P	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P46D	-	CM7R151D-46B-P	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P46D	-	FC6204D462P	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P46D	-	ML6204D462P	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P47	kb	XC6382F471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P47A	-	CM7R151A-47B-P	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P47A	-	FC6204A472P	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P47A	-	ML6204A472P	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P47B	-	CM7R151B-47B-P	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P47B	-	FC6204B472P	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P47B	-	ML6204B472P	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P47C	-	CM7R151C-47B-P	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P47C	-	FC6204C472P	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P47C	-	ML6204C472P	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P47D	-	CM7R151D-47B-P	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P47D	-	FC6204D472P	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P47D	-	ML6204D472P	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P48	-	TK11248AU	LVR-IC	LDO, 4.8V±2.4%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
P48	kb	XC6382F481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P48A	-	CM7R151A-48B-P	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P48A	-	FC6204A482P	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P48A	-	ML6204A482P	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P48B	-	CM7R151B-48B-P	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P48B	-	FC6204B482P	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P48B	-	ML6204B482P	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P48C	-	CM7R151C-48B-P	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P48C	-	FC6204C482P	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P48C	-	ML6204C482P	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P48D	-	CM7R151D-48B-P	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P48D	-	FC6204D482P	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P48D	-	ML6204D482P	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P49	-	TK11249AU	LVR-IC	LDO, 4.9V±2.4%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
P49	kb	XC6382F491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P49A	-	CM7R151A-49B-P	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P49A	-	FC6204A492P	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P49A	-	ML6204A492P	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P49B	-	CM7R151B-49B-P	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P49B	-	FC6204B492P	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P49B	-	ML6204B492P	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P49C	-	CM7R151C-49B-P	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P49C	-	FC6204C492P	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P49C	-	ML6204C492P	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P49D	-	CM7R151D-49B-P	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P49D	-	FC6204D492P	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P49D	-	ML6204D492P	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P4AA	-	CM7R151A-40A-P	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4AA	-	FC6204A40AP	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P4AA	-	ML6204A40AP	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P4AB	-	CM7R151B-40A-P	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P4AB	-	FC6204B40AP	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P4AB	-	ML6204B40AP	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P4AC	-	CM7R151C-40A-P	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4AC	-	FC6204C40AP	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P4AC	-	ML6204C40AP	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P4AD	-	CM7R151D-40A-P	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P4AD	-	FC6204D40AP	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P4AD	-	ML6204D40AP	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P4BA	-	CM7R151A-41A-P	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4BA	-	FC6204A41AP	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P4BA	-	ML6204A41AP	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P4BB	-	CM7R151B-41A-P	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P4BB	-	FC6204B41AP	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P4BB	-	ML6204B41AP	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P4BC	-	CM7R151C-41A-P	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4BC	-	FC6204C41AP	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P4BC	-	ML6204C41AP	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P4BD	-	CM7R151D-41A-P	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P4BD	-	FC6204D41AP	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P4BD	-	ML6204D41AP	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P4CA	-	CM7R151A-42A-P	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4CA	-	FC6204A42AP	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P4CA	-	ML6204A42AP	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P4CB	-	CM7R151B-42A-P	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P4CB	-	FC6204B42AP	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P4CB	-	ML6204B42AP	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P4CC	-	CM7R151C-42A-P	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4CC	-	FC6204C42AP	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P4CC	-	ML6204C42AP	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P4CD	-	CM7R151D-42A-P	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P4CD	-	FC6204D42AP	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P4CD	-	ML6204D42AP	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P4DA	-	CM7R151A-43A-P	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4DA	-	FC6204A43AP	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P4DA	-	ML6204A43AP	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P4DB	-	CM7R151B-43A-P	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P4DB	-	FC6204B43AP	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P4DB	-	ML6204B43AP	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P4DC	-	CM7R151C-43A-P	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4DC	-	FC6204C43AP	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P4DC	-	ML6204C43AP	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P4DD	-	CM7R151D-43A-P	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P4DD	-	FC6204D43AP	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P4DD	-	ML6204D43AP	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P4EA	-	CM7R151A-44A-P	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4EA	-	FC6204A44AP	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P4EA	-	ML6204A44AP	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P4EB	-	CM7R151B-44A-P	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P4EB	-	FC6204B44AP	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P4EB	-	ML6204B44AP	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P4EC	-	CM7R151C-44A-P	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4EC	-	FC6204C44AP	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P4EC	-	ML6204C44AP	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P4ED	-	CM7R151D-44A-P	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P4ED	-	FC6204D44AP	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P4ED	-	ML6204D44AP	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P4FA	-	CM7R151A-45A-P	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4FA	-	FC6204A45AP	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P4FA	-	ML6204A45AP	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P4FB	-	CM7R151B-45A-P	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P4FB	-	FC6204B45AP	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P4FB	-	ML6204B45AP	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P4FC	-	CM7R151C-45A-P	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4FC	-	FC6204C45AP	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P4FC	-	ML6204C45AP	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P4FD	-	CM7R151D-45A-P	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P4FD	-	FC6204D45AP	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P4FD	-	ML6204D45AP	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P4GA	-	CM7R151A-46A-P	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4GA	-	FC6204A46AP	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P4GA	-	ML6204A46AP	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P4GB	-	CM7R151B-46A-P	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P4GB	-	FC6204B46AP	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P4GB	-	ML6204B46AP	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P4GC	-	CM7R151C-46A-P	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4GC	-	FC6204C46AP	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P4GC	-	ML6204C46AP	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P4GD	-	CM7R151D-46A-P	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P4GD	-	FC6204D46AP	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P4GD	-	ML6204D46AP	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P4HA	-	CM7R151A-47A-P	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4HA	-	FC6204A47AP	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P4HA	-	ML6204A47AP	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P4HB	-	CM7R151B-47A-P	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P4HB	-	FC6204B47AP	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P4HB	-	ML6204B47AP	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P4HC	-	CM7R151C-47A-P	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4HC	-	FC6204C47AP	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P4HC	-	ML6204C47AP	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P4HD	-	CM7R151D-47A-P	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P4HD	-	FC6204D47AP	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P4HD	-	ML6204D47AP	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P4IA	-	CM7R151A-48A-P	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4IA	-	FC6204A48AP	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P4IA	-	ML6204A48AP	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P4IB	-	CM7R151B-48A-P	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P4IB	-	FC6204B48AP	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P4IB	-	ML6204B48AP	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P4IC	-	CM7R151C-48A-P	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4IC	-	FC6204C48AP	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P4IC	-	ML6204C48AP	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P4ID	-	CM7R151D-48A-P	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P4ID	-	FC6204D48AP	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P4ID	-	ML6204D48AP	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P4JA	-	CM7R151A-49A-P	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4JA	-	FC6204A49AP	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P4JA	-	ML6204A49AP	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P4JB	-	CM7R151B-49A-P	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P4JB	-	FC6204B49AP	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P4JB	-	ML6204B49AP	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P4JC	-	CM7R151C-49A-P	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P4JC	-	FC6204C49AP	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P4JC	-	ML6204C49AP	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P4JD	-	CM7R151D-49A-P	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P4JD	-	FC6204D49AP	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P4JD	-	ML6204D49AP	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P50	-	TK11250AU	LVR-IC	LDO, 5.0V±2.4%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
P50	kb	XC6382F501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P50A	-	CM7R151A-50B-P	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P50A	-	FC6204A502P	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P50A	-	ML6204A502P	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P50B	-	CM7R151B-50B-P	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P50B	-	FC6204B502P	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P50B	-	ML6204B502P	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P50C	-	CM7R151C-50B-P	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P50C	-	FC6204C502P	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P50C	-	ML6204C502P	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P50D	-	CM7R151D-50B-P	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P50D	-	FC6204D502P	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P50D	-	ML6204D502P	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P51	kb	XC6382F511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P51A	-	CM7R151A-51B-P	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P51A	-	FC6204A512P	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P51A	-	ML6204A512P	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P51B	-	CM7R151B-51B-P	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P51B	-	FC6204B512P	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P51B	-	ML6204B512P	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P51C	-	CM7R151C-51B-P	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P51C	-	FC6204C512P	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P51C	-	ML6204C512P	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P51D	-	CM7R151D-51B-P	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P51D	-	FC6204D512P	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P51D	-	ML6204D512P	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P52	kb	XC6382F521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P52A	-	CM7R151A-52B-P	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P52A	-	FC6204A522P	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P52A	-	ML6204A522P	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P52B	-	CM7R151B-52B-P	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P52B	-	FC6204B522P	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P52B	-	ML6204B522P	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P52C	-	CM7R151C-52B-P	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P52C	-	FC6204C522P	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P52C	-	ML6204C522P	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P52D	-	CM7R151D-52B-P	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P52D	-	FC6204D522P	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P52D	-	ML6204D522P	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P53	kb	XC6382F531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P53A	-	CM7R151A-53B-P	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P53A	-	FC6204A532P	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P53A	-	ML6204A532P	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P53B	-	CM7R151B-53B-P	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P53B	-	FC6204B532P	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P53B	-	ML6204B532P	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P53C	-	CM7R151C-53B-P	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P53C	-	FC6204C532P	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P53C	-	ML6204C532P	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P53D	-	CM7R151D-53B-P	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P53D	-	FC6204D532P	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P53D	-	ML6204D532P	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P54	kb	XC6382F541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P54A	-	CM7R151A-54B-P	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P54A	-	FC6204A542P	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P54A	-	ML6204A542P	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P54B	-	CM7R151B-54B-P	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P54B	-	FC6204B542P	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P54B	-	ML6204B542P	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P54C	-	CM7R151C-54B-P	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P54C	-	FC6204C542P	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P54C	-	ML6204C542P	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P54D	-	CM7R151D-54B-P	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P54D	-	FC6204D542P	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P54D	-	ML6204D542P	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P55	kb	XC6382F551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P55A	-	CM7R151A-55B-P	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P55A	-	FC6204A552P	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P55A	-	ML6204A552P	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P55B	-	CM7R151B-55B-P	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P55B	-	FC6204B552P	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P55B	-	ML6204B552P	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P55C	-	CM7R151C-55B-P	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P55C	-	FC6204C552P	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P55C	-	ML6204C552P	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P55D	-	CM7R151D-55B-P	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P55D	-	FC6204D552P	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P55D	-	ML6204D552P	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P56	kb	XC6382F561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P56A	-	CM7R151A-56B-P	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P56A	-	FC6204A562P	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P56A	-	ML6204A562P	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P56B	-	CM7R151B-56B-P	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P56B	-	FC6204B562P	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P56B	-	ML6204B562P	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P56C	-	CM7R151C-56B-P	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P56C	-	FC6204C562P	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P56C	-	ML6204C562P	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P56D	-	CM7R151D-56B-P	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P56D	-	FC6204D562P	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P56D	-	ML6204D562P	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P57	kb	XC6382F571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P57A	-	CM7R151A-57B-P	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P57A	-	FC6204A572P	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P57A	-	ML6204A572P	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P57B	-	CM7R151B-57B-P	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P57B	-	FC6204B572P	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P57B	-	ML6204B572P	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P57C	-	CM7R151C-57B-P	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P57C	-	FC6204C572P	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P57C	-	ML6204C572P	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P57D	-	CM7R151D-57B-P	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P57D	-	FC6204D572P	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P57D	-	ML6204D572P	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P58	kb	XC6382F581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P58A	-	CM7R151A-58B-P	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P58A	-	FC6204A582P	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P58A	-	ML6204A582P	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P58B	-	CM7R151B-58B-P	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P58B	-	FC6204B582P	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P58B	-	ML6204B582P	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P58C	-	CM7R151C-58B-P	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P58C	-	FC6204C582P	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P58C	-	ML6204C582P	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P58D	-	CM7R151D-58B-P	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P58D	-	FC6204D582P	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P58D	-	ML6204D582P	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P59	kb	XC6382F591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P59A	-	CM7R151A-59B-P	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P59A	-	FC6204A592P	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P59A	-	ML6204A592P	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P59B	-	CM7R151B-59B-P	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P59B	-	FC6204B592P	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P59B	-	ML6204B592P	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P59C	-	CM7R151C-59B-P	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P59C	-	FC6204C592P	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P59C	-	ML6204C592P	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P59D	-	CM7R151D-59B-P	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P59D	-	FC6204D592P	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P59D	-	ML6204D592P	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P5AA	-	CM7R151A-50A-P	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5AA	-	FC6204A50AP	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P5AA	-	ML6204A50AP	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P5AB	-	CM7R151B-50A-P	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P5AB	-	FC6204B50AP	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P5AB	-	ML6204B50AP	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P5AC	-	CM7R151C-50A-P	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5AC	-	FC6204C50AP	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P5AC	-	ML6204C50AP	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P5AD	-	CM7R151D-50A-P	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P5AD	-	FC6204D50AP	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P5AD	-	ML6204D50AP	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P5BA	-	CM7R151A-51A-P	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5BA	-	FC6204A51AP	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P5BA	-	ML6204A51AP	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P5BB	-	CM7R151B-51A-P	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P5BB	-	FC6204B51AP	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P5BB	-	ML6204B51AP	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P5BC	-	CM7R151C-51A-P	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5BC	-	FC6204C51AP	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P5BC	-	ML6204C51AP	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P5BD	-	CM7R151D-51A-P	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P5BD	-	FC6204D51AP	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P5BD	-	ML6204D51AP	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P5CA	-	CM7R151A-52A-P	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5CA	-	FC6204A52AP	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P5CA	-	ML6204A52AP	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P5CB	-	CM7R151B-52A-P	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P5CB	-	FC6204B52AP	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P5CB	-	ML6204B52AP	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P5CC	-	CM7R151C-52A-P	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5CC	-	FC6204C52AP	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P5CC	-	ML6204C52AP	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P5CD	-	CM7R151D-52A-P	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P5CD	-	FC6204D52AP	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P5CD	-	ML6204D52AP	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P5DA	-	CM7R151A-53A-P	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5DA	-	FC6204A53AP	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P5DA	-	ML6204A53AP	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P5DB	-	CM7R151B-53A-P	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P5DB	-	FC6204B53AP	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P5DB	-	ML6204B53AP	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P5DC	-	CM7R151C-53A-P	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5DC	-	FC6204C53AP	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P5DC	-	ML6204C53AP	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P5DD	-	CM7R151D-53A-P	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P5DD	-	FC6204D53AP	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P5DD	-	ML6204D53AP	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P5EA	-	CM7R151A-54A-P	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5EA	-	FC6204A54AP	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P5EA	-	ML6204A54AP	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P5EB	-	CM7R151B-54A-P	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P5EB	-	FC6204B54AP	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P5EB	-	ML6204B54AP	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P5EC	-	CM7R151C-54A-P	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5EC	-	FC6204C54AP	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P5EC	-	ML6204C54AP	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P5ED	-	CM7R151D-54A-P	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P5ED	-	FC6204D54AP	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P5ED	-	ML6204D54AP	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P5FA	-	CM7R151A-55A-P	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5FA	-	FC6204A55AP	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P5FA	-	ML6204A55AP	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P5FB	-	CM7R151B-55A-P	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P5FB	-	FC6204B55AP	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P5FB	-	ML6204B55AP	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P5FC	-	CM7R151C-55A-P	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5FC	-	FC6204C55AP	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P5FC	-	ML6204C55AP	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P5FD	-	CM7R151D-55A-P	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P5FD	-	FC6204D55AP	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P5FD	-	ML6204D55AP	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P5GA	-	CM7R151A-56A-P	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5GA	-	FC6204A56AP	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P5GA	-	ML6204A56AP	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P5GB	-	CM7R151B-56A-P	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P5GB	-	FC6204B56AP	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P5GB	-	ML6204B56AP	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P5GC	-	CM7R151C-56A-P	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5GC	-	FC6204C56AP	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P5GC	-	ML6204C56AP	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P5GD	-	CM7R151D-56A-P	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P5GD	-	FC6204D56AP	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P5GD	-	ML6204D56AP	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P5HA	-	CM7R151A-57A-P	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5HA	-	FC6204A57AP	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P5HA	-	ML6204A57AP	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P5HB	-	CM7R151B-57A-P	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P5HB	-	FC6204B57AP	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P5HB	-	ML6204B57AP	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P5HC	-	CM7R151C-57A-P	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5HC	-	FC6204C57AP	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P5HC	-	ML6204C57AP	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P5HD	-	CM7R151D-57A-P	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P5HD	-	FC6204D57AP	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P5HD	-	ML6204D57AP	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P5IA	-	CM7R151A-58A-P	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5IA	-	FC6204A58AP	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P5IA	-	ML6204A58AP	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P5IB	-	CM7R151B-58A-P	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P5IB	-	FC6204B58AP	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P5IB	-	ML6204B58AP	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P5IC	-	CM7R151C-58A-P	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5IC	-	FC6204C58AP	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P5IC	-	ML6204C58AP	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P5ID	-	CM7R151D-58A-P	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P5ID	-	FC6204D58AP	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P5ID	-	ML6204D58AP	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P5JA	-	CM7R151A-59A-P	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5JA	-	FC6204A59AP	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P5JA	-	ML6204A59AP	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P5JB	-	CM7R151B-59A-P	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P5JB	-	FC6204B59AP	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P5JB	-	ML6204B59AP	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P5JC	-	CM7R151C-59A-P	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P5JC	-	FC6204C59AP	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P5JC	-	ML6204C59AP	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P5JD	-	CM7R151D-59A-P	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P5JD	-	FC6204D59AP	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P5JD	-	ML6204D59AP	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P60	kb	XC6382F601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P60A	-	CM7R151A-60B-P	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Can
P60A	-	FC6204A602P	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
P60A	-	ML6204A602P	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
P60B	-	CM7R151B-60B-P	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Can
P60B	-	FC6204B602P	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
P60B	-	ML6204B602P	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
P60C	-	CM7R151C-60B-P	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PDR	SOT-89-5	32um	VR4	6j	Can
P60C	-	FC6204C602P	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
P60C	-	ML6204C602P	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
P60D	-	CM7R151D-60B-P	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Can
P60D	-	FC6204D602P	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
P60D	-	ML6204D602P	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
P61	kb	XC6382F611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P62	kb	XC6382F621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P63	-	S-1701B3328-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P63	kb	XC6382F631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P64	-	S-1701B5040-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P64	kb	XC6382F641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P65	-	S-1701B5041-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P65	kb	XC6382F651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P66	-	S-1701B5042-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P66	kb	XC6382F661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P67	-	S-1701B5043-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P67	kb	XC6382F671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P68	kb	XC6382F681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P69	kb	XC6382F691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P6A	-	S-1701A1815-U5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6B	-	S-1701A2520-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6C	-	S-1701A2521-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6D	-	S-1701A2522-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6E	-	S-1701A3024-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6F	-	S-1701A3025-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6G	-	S-1701A3026-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6H	-	S-1701A3326-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6I	-	S-1701A3327-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6J	-	S-1701A3328-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6K	-	S-1701A3430-U5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6L	-	S-1701A5040-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6M	-	S-1701A5041-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6N	-	S-1701A5042-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6O	-	S-1701A5043-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6R	-	S-1701B1815-U5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6S	-	S-1701B2520-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6T	-	S-1701B2521-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6U	-	S-1701B2522-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6V	-	S-1701B3024-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6W	-	S-1701B3025-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P6X	-	S-1701B3026-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6Y	-	S-1701B3326-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P6Z	-	S-1701B3327-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P70	kb	XC6382F701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
P73	-	S-1701W2522-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P74	-	S-1701W3024-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P75	-	S-1701W3025-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P76	-	S-1701W3026-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P77	-	S-1701W3326-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P78	-	S-1701W3327-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P79	-	S-1701W3328-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7E	-	S-1701V1815-U5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7F	-	S-1701V2520-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7G	-	S-1701V2521-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7H	-	S-1701V2522-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7I	-	S-1701V3024-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7J	-	S-1701V3025-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7K	-	S-1701V3026-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7L	-	S-1701V3326-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7M	-	S-1701V3327-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7N	-	S-1701V3328-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7O	-	S-1701V5040-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7P	-	S-1701V5041-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7Q	-	S-1701V5042-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7R	-	S-1701V5043-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7S	-	S-1701V3430-U5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7X	-	S-1701W1815-U5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7Y	-	S-1701W2520-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P7Z	-	S-1701W2521-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P8A	-	S-1701W5040-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P8B	-	S-1701W5041-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P8C	-	S-1701W5042-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P8D	-	S-1701W5043-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P8E	-	S-1701W3430-U5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P8J	-	S-1701X3228-U5T1	LVR/Vdet-IC	LDO, 3.2V±1%, 400mA, Vdet=2.8V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P8O	-	S-1701Y3228-U5T1	LVR/Vdet-IC	LDO, 3.2V±1%, 400mA, Vdet=2.8V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P8T	-	S-1701Z3228-U5T1	LVR/Vdet-IC	LDO, 3.2V±1%, 400mA, Vdet=2.8V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
P8Y	-	S-1701B3430-U5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P9A	-	S-1701C1815-U5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P9B	-	S-1701C2520-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P9C	-	S-1701C2521-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P9D	-	S-1701C2522-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P9E	-	S-1701C3024-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P9F	-	S-1701C3025-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P9G	-	S-1701C3026-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P9H	-	S-1701C3326-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P9I	-	S-1701C3327-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P9J	-	S-1701C3328-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P9K	-	S-1701C3430-U5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P9L	-	S-1701C5040-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P9M	-	S-1701C5041-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P9N	-	S-1701C5042-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
P9O	-	S-1701C5043-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PA	-	AP7361ADJY	LVR-IC	LDO, Adjustable 1.0..3.3V, 1A, +CE	SOT-89-5	32h4	VR16	6ta	Di
PA	-	ELM99503B	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
PB	-	AP7361-10Y	LVR-IC	LDO, 1.0V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6ta	Di
PB	-	ELM99513B	LVR-IC	LDO, 5.1V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
PC	-	AP7361-12Y	LVR-IC	LDO, 1.2V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6ta	Di
PC	-	ELM99523B	LVR-IC	LDO, 5.2V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
PD	-	AP7361-15Y	LVR-IC	LDO, 1.5V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6ta	Di
PD	-	ELM99533B	LVR-IC	LDO, 5.3V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
PE	-	AP7361-18Y	LVR-IC	LDO, 1.8V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6ta	Di
PE	-	ELM99543B	LVR-IC	LDO, 5.4V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
PF	-	AP7361-25Y	LVR-IC	LDO, 2.5V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6ta	Di
PF	-	ELM99553B	LVR-IC	LDO, 5.5V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
PG	-	AP7361-28Y	LVR-IC	LDO, 2.8V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6ta	Di
PG	-	ELM99563B	LVR-IC	LDO, 5.6V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
PH	-	AP7361-33Y	LVR-IC	LDO, 3.3V±2%, 1A, +CE	SOT-89-5	32vy	VR4	6ta	Di
PH	-	ELM99573B	LVR-IC	LDO, 5.7V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
PJ	-	ELM99583B	LVR-IC	LDO, 5.8V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PK	-	ELM99593B	LVR-IC	LDO, 5.9V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
PV3	-	S-1701E3326-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PV4	-	S-1701E3327-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PV5	-	S-1701E3328-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PV6	-	S-1701E5040-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PV7	-	S-1701E5041-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PV8	-	S-1701E5042-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PV9	-	S-1701E5043-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVA	-	S-1701D1815-U5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVB	-	S-1701D2520-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVC	-	S-1701D2521-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVD	-	S-1701D2522-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVE	-	S-1701D3024-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVF	-	S-1701D3025-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVG	-	S-1701D3026-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVH	-	S-1701D3326-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVI	-	S-1701D3327-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVJ	-	S-1701D3328-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVK	-	S-1701D5040-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVL	-	S-1701D5041-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVM	-	S-1701D5042-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVN	-	S-1701D5043-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVO	-	S-1701D3430-U5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVT	-	S-1701E1815-U5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVU	-	S-1701E2520-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVV	-	S-1701E2521-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVW	-	S-1701E2522-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVX	-	S-1701E3024-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVY	-	S-1701E3025-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PVZ	-	S-1701E3026-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PW3	-	S-1701N2515-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PW4	-	S-1701N2715-U5T1	LVR/Vdet-IC	LDO, 2.7V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PW5	-	S-1701N3015-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PW6	-	S-1701N3315-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PW7	-	S-1701N5015-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PWA	-	S-1701E3430-U5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PWF	-	S-1701F1815-U5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PWG	-	S-1701F2520-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PWH	-	S-1701F2521-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PWI	-	S-1701F2522-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PWJ	-	S-1701F3024-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PWK	-	S-1701F3025-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PWL	-	S-1701F3026-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PWM	-	S-1701F3326-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PWN	-	S-1701F3327-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PWO	-	S-1701F3328-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PWP	-	S-1701F5040-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PWQ	-	S-1701F5041-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PWR	-	S-1701F5042-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PWS	-	S-1701F5043-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO	SOT-89-5	32hk	VR15	6j	Sii
PWT	-	S-1701F3430-U5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO, +CE	SOT-89-5	32hk	VR15	6j	Sii
PWY	-	S-1701N1515-U5T1	LVR/Vdet-IC	LDO, 1.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PWZ	-	S-1701N1815-U5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PX3	-	S-1701Q1815-U5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PX4	-	S-1701Q2515-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PX5	-	S-1701Q2715-U5T1	LVR/Vdet-IC	LDO, 2.74V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PX6	-	S-1701Q3015-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PX7	-	S-1701Q3315-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PX8	-	S-1701Q5015-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PXI	-	S-1701P1515-U5T1	LVR/Vdet-IC	LDO, 1.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PXJ	-	S-1701P1815-U5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PXK	-	S-1701P2515-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PXL	-	S-1701P2715-U5T1	LVR/Vdet-IC	LDO, 2.74V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PXM	-	S-1701P3015-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PXN	-	S-1701P3315-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PXO	-	S-1701P5015-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PXZ	-	S-1701Q1515-U5T1	LVR/Vdet-IC	LDO, 1.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PYE	-	S-1701R1515-U5T1	LVR/Vdet-IC	LDO, 1.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PYF	-	S-1701R1815-U5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PYG	-	S-1701R2515-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PYH	-	S-1701R2715-U5T1	LVR/Vdet-IC	LDO, 2.74V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PYI	-	S-1701R3015-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PYJ	-	S-1701R3315-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PYK	-	S-1701R5015-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PYQ	-	S-1701S1515-U5T1	LVR/Vdet-IC	LDO, 1.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PYR	-	S-1701S1815-U5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PYS	-	S-1701S2515-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PYT	-	S-1701S2715-U5T1	LVR/Vdet-IC	LDO, 2.74V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PYU	-	S-1701S3015-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PYV	-	S-1701S3315-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PYW	-	S-1701S5015-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PZ3	-	S-1701U3328-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.8V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
PZ4	-	S-1701U5040-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
PZ5	-	S-1701U5041-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.1V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
PZ6	-	S-1701U5042-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.2V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
PZ7	-	S-1701U5043-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=4.3V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
PZ8	-	S-1701U3430-U5T1	LVR/Vdet-IC	LDO, 3.4V±1%, 400mA, Vdet=3V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
PZA	-	S-1701T1515-U5T1	LVR/Vdet-IC	LDO, 1.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PZB	-	S-1701T1815-U5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PZC	-	S-1701T2515-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PZD	-	S-1701T2715-U5T1	LVR/Vdet-IC	LDO, 2.7V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PZE	-	S-1701T3015-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PZF	-	S-1701T3315-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PZG	-	S-1701T5015-U5T1	LVR/Vdet-IC	LDO, 5.0V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hl	VR14	6j	Sii
PZR	-	S-1701U1815-U5T1	LVR/Vdet-IC	LDO, 1.8V±1%, 400mA, Vdet=1.5V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
PZS	-	S-1701U2520-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
PZT	-	S-1701U2521-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.1V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
PZU	-	S-1701U2522-U5T1	LVR/Vdet-IC	LDO, 2.5V±1%, 400mA, Vdet=2.2V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
PZV	-	S-1701U3024-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.4V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
PZW	-	S-1701U3025-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.5V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
PZX	-	S-1701U3026-U5T1	LVR/Vdet-IC	LDO, 3.0V±1%, 400mA, Vdet=2.6V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
PZY	-	S-1701U3326-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.6V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
PZZ	-	S-1701U3327-U5T1	LVR/Vdet-IC	LDO, 3.3V±1%, 400mA, Vdet=2.7V, -Reset ODO	SOT-89-5	32hm	VR13	6j	Sii
Q30	-	TK11330U	LVR-IC	LDO, 3.0V±5%, 170mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
Q33	-	TK11333U	LVR-IC	LDO, 3.3V±5%, 170mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
Q40	-	TK11340U	LVR-IC	LDO, 4.0V±5%, 170mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
Q45	-	TK11345U	LVR-IC	LDO, 4.5V±5%, 170mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
Q48	-	TK11348U	LVR-IC	LDO, 4.8V±5%, 170mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
Q50	-	TK11350U	LVR-IC	LDO, 5.0V±5%, 170mA, -CE	SOT-89-5	32vg	VR7	6i	Tok
Q8B	-	S-1133B12-U5T1G	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8C	-	S-1133B13-U5T1G	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8D	-	S-1133B14-U5T1G	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8E	-	S-1133B15-U5T1G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8F	-	S-1133B16-U5T1G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8G	-	S-1133B17-U5T1G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8H	-	S-1133B18-U5T1G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8I	-	S-1133B19-U5T1G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8J	-	S-1133B20-U5T1G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8K	-	S-1133B21-U5T1G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8L	-	S-1133B22-U5T1G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8M	-	S-1133B23-U5T1G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8N	-	S-1133B24-U5T1G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8O	-	S-1133B25-U5T1G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8P	-	S-1133B26-U5T1G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8Q	-	S-1133B27-U5T1G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8R	-	S-1133B28-U5T1G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8S	-	S-1133B29-U5T1G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8T	-	S-1133B30-U5T1G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8U	-	S-1133B31-U5T1G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8V	-	S-1133B32-U5T1G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8W	-	S-1133B33-U5T1G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8X	-	S-1133B34-U5T1G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8Y	-	S-1133B35-U5T1G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q8Z	-	S-1133B36-U5T1G	LVR-IC	LDO, 3.6V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9A	-	S-1133B37-U5T1G	LVR-IC	LDO, 3.7V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9B	-	S-1133B38-U5T1G	LVR-IC	LDO, 3.8V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9C	-	S-1133B39-U5T1G	LVR-IC	LDO, 3.9V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9D	-	S-1133B40-U5T1G	LVR-IC	LDO, 4.0V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9E	-	S-1133B41-U5T1G	LVR-IC	LDO, 4.1V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9F	-	S-1133B42-U5T1G	LVR-IC	LDO, 4.2V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Q9G	-	S-1133B43-U5T1G	LVR-IC	LDO, 4.3V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9H	-	S-1133B44-U5T1G	LVR-IC	LDO, 4.4V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9I	-	S-1133B45-U5T1G	LVR-IC	LDO, 4.5V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9J	-	S-1133B46-U5T1G	LVR-IC	LDO, 4.6V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9K	-	S-1133B47-U5T1G	LVR-IC	LDO, 4.7V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9L	-	S-1133B48-U5T1G	LVR-IC	LDO, 4.8V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9M	-	S-1133B49-U5T1G	LVR-IC	LDO, 4.9V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9N	-	S-1133B50-U5T1G	LVR-IC	LDO, 5.0V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9O	-	S-1133B51-U5T1G	LVR-IC	LDO, 5.1V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9P	-	S-1133B52-U5T1G	LVR-IC	LDO, 5.2V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9Q	-	S-1133B53-U5T1G	LVR-IC	LDO, 5.3V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9R	-	S-1133B54-U5T1G	LVR-IC	LDO, 5.4V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9S	-	S-1133B55-U5T1G	LVR-IC	LDO, 5.5V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9T	-	S-1133B56-U5T1G	LVR-IC	LDO, 5.6V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9U	-	S-1133B57-U5T1G	LVR-IC	LDO, 5.7V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9V	-	S-1133B58-U5T1G	LVR-IC	LDO, 5.8V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9W	-	S-1133B59-U5T1G	LVR-IC	LDO, 5.9V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
Q9X	-	S-1133B60-U5T1G	LVR-IC	LDO, 6.0V±1.0%, 300mA, +CE	SOT-89-5	32um	VR4	6n	Sii
QA	-	ELM99603B	LVR-IC	LDO, 6.0V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
QLA	-	S-1132B15-U5T1G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLB	-	S-1132B16-U5T1G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLC	-	S-1132B17-U5T1G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLD	-	S-1132B18-U5T1G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLE	-	S-1132B19-U5T1G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLF	-	S-1132B20-U5T1G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLG	-	S-1132B21-U5T1G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLH	-	S-1132B22-U5T1G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLI	-	S-1132B23-U5T1G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLJ	-	S-1132B24-U5T1G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLK	-	S-1132B25-U5T1G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLL	-	S-1132B26-U5T1G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLM	-	S-1132B27-U5T1G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLN	-	S-1132B28-U5T1G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLO	-	S-1132B29-U5T1G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLP	-	S-1132B30-U5T1G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLQ	-	S-1132B31-U5T1G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLR	-	S-1132B32-U5T1G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLS	-	S-1132B33-U5T1G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLT	-	S-1132B34-U5T1G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLU	-	S-1132B35-U5T1G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLV	-	S-1132B36-U5T1G	LVR-IC	LDO, 3.6V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLW	-	S-1132B37-U5T1G	LVR-IC	LDO, 3.7V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLX	-	S-1132B38-U5T1G	LVR-IC	LDO, 3.8V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLY	-	S-1132B39-U5T1G	LVR-IC	LDO, 3.9V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QLZ	-	S-1132B40-U5T1G	LVR-IC	LDO, 4.0V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QMA	-	S-1132B41-U5T1G	LVR-IC	LDO, 4.1V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QMB	-	S-1132B42-U5T1G	LVR-IC	LDO, 4.2V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QMC	-	S-1132B43-U5T1G	LVR-IC	LDO, 4.3V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QMD	-	S-1132B44-U5T1G	LVR-IC	LDO, 4.4V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QME	-	S-1132B45-U5T1G	LVR-IC	LDO, 4.5V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QMF	-	S-1132B46-U5T1G	LVR-IC	LDO, 4.6V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QMG	-	S-1132B47-U5T1G	LVR-IC	LDO, 4.7V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QMH	-	S-1132B48-U5T1G	LVR-IC	LDO, 4.8V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QMI	-	S-1132B49-U5T1G	LVR-IC	LDO, 4.9V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QMJ	-	S-1132B50-U5T1G	LVR-IC	LDO, 5.0V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QMK	-	S-1132B51-U5T1G	LVR-IC	LDO, 5.1V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QML	-	S-1132B52-U5T1G	LVR-IC	LDO, 5.2V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QMM	-	S-1132B53-U5T1G	LVR-IC	LDO, 5.3V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QMN	-	S-1132B54-U5T1G	LVR-IC	LDO, 5.4V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
QMO	-	S-1132B55-U5T1G	LVR-IC	LDO, 5.5V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
R01A	-	R5510H001A	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R02A	-	R5510H002A	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R02H	-	R5510H002H	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R02K	-	R5510H002K	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R030	-	R1500H030B	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R031	-	R1500H031B	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R032	-	R1500H032B	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R033	-	R1500H033B	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R034	-	R1500H034B	LVR-IC	LDO, 3.4V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R035	-	R1500H035B	LVR-IC	LDO, 3.5V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R036	-	R1500H036B	LVR-IC	LDO, 3.6V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R037	-	R1500H037B	LVR-IC	LDO, 3.7V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R038	-	R1500H038B	LVR-IC	LDO, 3.8V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R039	-	R1500H039B	LVR-IC	LDO, 3.9V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R03A	-	R5510H003A	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R03B	-	R5510H003B	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R03C	-	R5510H003C	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R03F	-	R5510H003F	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R03L	-	R5510H003L	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R040	-	R1500H040B	LVR-IC	LDO, 4.0V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R041	-	R1500H041B	LVR-IC	LDO, 4.1V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R042	-	R1500H042B	LVR-IC	LDO, 4.2V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R043	-	R1500H043B	LVR-IC	LDO, 4.3V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R044	-	R1500H044B	LVR-IC	LDO, 4.4V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R045	-	R1500H045B	LVR-IC	LDO, 4.5V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R046	-	R1500H046B	LVR-IC	LDO, 4.6V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R047	-	R1500H047B	LVR-IC	LDO, 4.7V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R048	-	R1500H048B	LVR-IC	LDO, 4.8V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R049	-	R1500H049B	LVR-IC	LDO, 5.9V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R04B	-	R5510H004B	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R04J	-	R5510H004J	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R050	-	R1500H050B	LVR-IC	LDO, 5.0V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R051	-	R1500H051B	LVR-IC	LDO, 5.1V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R052	-	R1500H052B	LVR-IC	LDO, 5.2V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R053	-	R1500H053B	LVR-IC	LDO, 5.3V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R054	-	R1500H054B	LVR-IC	LDO, 5.4V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R055	-	R1500H055B	LVR-IC	LDO, 5.5V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R056	-	R1500H056B	LVR-IC	LDO, 5.6V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R057	-	R1500H057B	LVR-IC	LDO, 5.7V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R058	-	R1500H058B	LVR-IC	LDO, 5.8V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R059	-	R1500H059B	LVR-IC	LDO, 5.9V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R05B	-	R5510H005B	LVR/Vdet-IC	LDO, 2.9V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R060	-	R1500H060B	LVR-IC	LDO, 6.0V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R061	-	R1500H061B	LVR-IC	LDO, 6.1V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R062	-	R1500H062B	LVR-IC	LDO, 6.2V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R063	-	R1500H063B	LVR-IC	LDO, 6.3V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R064	-	R1500H064B	LVR-IC	LDO, 6.4V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R065	-	R1500H065B	LVR-IC	LDO, 6.5V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R066	-	R1500H066B	LVR-IC	LDO, 6.6V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R067	-	R1500H067B	LVR-IC	LDO, 6.7V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R068	-	R1500H068B	LVR-IC	LDO, 6.8V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R069	-	R1500H069B	LVR-IC	LDO, 6.9V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R06D	-	R5510H006D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sn	VR15	6h	Ric
R070	-	R1500H070B	LVR-IC	LDO, 7.0V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R071	-	R1500H071B	LVR-IC	LDO, 7.1V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R072	-	R1500H072B	LVR-IC	LDO, 7.2V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R073	-	R1500H073B	LVR-IC	LDO, 7.3V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R074	-	R1500H074B	LVR-IC	LDO, 7.4V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R075	-	R1500H075B	LVR-IC	LDO, 7.5V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R076	-	R1500H076B	LVR-IC	LDO, 7.6V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R077	-	R1500H077B	LVR-IC	LDO, 7.7V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R078	-	R1500H078B	LVR-IC	LDO, 7.8V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R079	-	R1500H079B	LVR-IC	LDO, 7.9V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R07D	-	R5510H007D	LVR/Vdet-IC	LDO, 3.1V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sn	VR15	6h	Ric
R07H	-	R5510H007H	LVR/Vdet-IC	LDO, 3.1V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R07J	-	R5510H007J	LVR/Vdet-IC	LDO, 3.1V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R07K	-	R5510H007K	LVR/Vdet-IC	LDO, 3.1V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R080	-	R1500H080B	LVR-IC	LDO, 8.0V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R081	-	R1500H081B	LVR-IC	LDO, 8.1V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R082	-	R1500H082B	LVR-IC	LDO, 8.2V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R083	-	R1500H083B	LVR-IC	LDO, 8.3V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R084	-	R1500H084B	LVR-IC	LDO, 8.4V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R085	-	R1500H085B	LVR-IC	LDO, 8.5V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R086	-	R1500H086B	LVR-IC	LDO, 8.6V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R087	-	R1500H087B	LVR-IC	LDO, 8.7V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R088	-	R1500H088B	LVR-IC	LDO, 8.8V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R089	-	R1500H089B	LVR-IC	LDO, 8.9V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R08C	-	R5510H008C	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R08D	-	R5510H008D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sn	VR15	6h	Ric
R090	-	R1500H090B	LVR-IC	LDO, 9.0V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R091	-	R1500H091B	LVR-IC	LDO, 9.1V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R092	-	R1500H092B	LVR-IC	LDO, 9.2V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R093	-	R1500H093B	LVR-IC	LDO, 9.3V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R094	-	R1500H094B	LVR-IC	LDO, 9.4V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R095	-	R1500H095B	LVR-IC	LDO, 9.5V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R096	-	R1500H096B	LVR-IC	LDO, 9.6V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R097	-	R1500H097B	LVR-IC	LDO, 9.7V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R098	-	R1500H098B	LVR-IC	LDO, 9.8V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R099	-	R1500H099B	LVR-IC	LDO, 9.9V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R09D	-	R5510H009D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sn	VR15	6h	Ric
R100	-	R1500H100B	LVR-IC	LDO, 10.0V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R101	-	R1500H101B	LVR-IC	LDO, 10.1V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R102	-	R1500H102B	LVR-IC	LDO, 10.2V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R103	-	R1500H103B	LVR-IC	LDO, 10.3V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R104	-	R1500H104B	LVR-IC	LDO, 10.4V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R105	-	R1500H105B	LVR-IC	LDO, 10.5V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R106	-	R1500H106B	LVR-IC	LDO, 10.6V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R107	-	R1500H107B	LVR-IC	LDO, 10.7V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R108	-	R1500H108B	LVR-IC	LDO, 10.8V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R109	-	R1500H109B	LVR-IC	LDO, 10.9V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R10C	-	R5510H010C	LVR/Vdet-IC	LDO, 3.4V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R10N	-	R5510H010N	LVR/Vdet-IC	LDO, 3.4V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R110	-	R1500H110B	LVR-IC	LDO, 11.0V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R111	-	R1500H111B	LVR-IC	LDO, 11.1V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R112	-	R1500H112B	LVR-IC	LDO, 11.2V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R113	-	R1500H113B	LVR-IC	LDO, 11.3V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R114	-	R1500H114B	LVR-IC	LDO, 11.4V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R115	-	R1500H115B	LVR-IC	LDO, 11.5V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R116	-	R1500H116B	LVR-IC	LDO, 11.6V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R117	-	R1500H117B	LVR-IC	LDO, 11.7V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R118	-	R1500H118B	LVR-IC	LDO, 11.8V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R119	-	R1500H119B	LVR-IC	LDO, 11.9V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R11A	-	R5510H011A	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R11C	-	R5510H011C	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R11N	-	R5510H011N	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R120	-	R1500H120B	LVR-IC	LDO, 12.0V±2%, 500mA, +CE	SOT-89-5	32x2	VR4	6h	Ric
R12D	-	R5510H012D	LVR/Vdet-IC	LDO, 3.6V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sn	VR15	6h	Ric
R13D	-	R5510H013D	LVR/Vdet-IC	LDO, 3.7V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sn	VR15	6h	Ric
R14H	-	R5510H014H	LVR/Vdet-IC	LDO, 3.8V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R14J	-	R5510H014J	LVR/Vdet-IC	LDO, 3.8V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R14K	-	R5510H014K	LVR/Vdet-IC	LDO, 3.8V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R15	-	TK11215UM	LVR-IC	LDO, 1.5V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R15H	-	R5510H015H	LVR/Vdet-IC	LDO, 3.9V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R15J	-	R5510H015J	LVR/Vdet-IC	LDO, 3.9V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R15K	-	R5510H015K	LVR/Vdet-IC	LDO, 3.9V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R16	-	TK11216UM	LVR-IC	LDO, 1.6V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R16H	-	R5510H016H	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R16J	-	R5510H016J	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R16K	-	R5510H016K	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R17	-	TK11217UM	LVR-IC	LDO, 1.7V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R17H	-	R5510H017H	LVR/Vdet-IC	LDO, 4.1V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R17J	-	R5510H017J	LVR/Vdet-IC	LDO, 4.1V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R17K	-	R5510H017K	LVR/Vdet-IC	LDO, 4.1V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R18	-	TK11218UM	LVR-IC	LDO, 1.8V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R18D	-	R5510H018D	LVR/Vdet-IC	LDO, 4.2V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sn	VR15	6h	Ric
R19	-	TK11219UM	LVR-IC	LDO, 1.9V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R19C	-	R5510H019C	LVR/Vdet-IC	LDO, 4.3V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R20	-	TK11220UM	LVR-IC	LDO, 2.0V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R20	kb	XC6383C201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R20C	-	R5510H020C	LVR/Vdet-IC	LDO, 4.4V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R21	-	TK11221UM	LVR-IC	LDO, 2.1V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R21	kb	XC6383C211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R21M	-	R5510H021M	LVR/Vdet-IC	LDO, 4.5V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R22	-	TK11222UM	LVR-IC	LDO, 2.2V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R22	kb	XC6383C221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R22J	-	R5510H022J	LVR/Vdet-IC	LDO, 4.6V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R22L	-	R5510H022L	LVR/Vdet-IC	LDO, 4.6V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R23	-	TK11223UM	LVR-IC	LDO, 2.3V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R23	kb	XC6383C231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R23L	-	R5510H023L	LVR/Vdet-IC	LDO, 4.7V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R24	-	TK11224UM	LVR-IC	LDO, 2.4V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R24	kb	XC6383C241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R24D	-	R5510H024D	LVR/Vdet-IC	LDO, 4.8V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sn	VR15	6h	Ric
R25	-	TK11225UM	LVR-IC	LDO, 2.5V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R25	kb	XC6383C251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R25K	-	R5510H025K	LVR/Vdet-IC	LDO, 4.9V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sm	VR15	6h	Ric
R26	-	TK11226UM	LVR-IC	LDO, 2.6V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R26	kb	XC6383C261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R26N	-	R5510H026N	LVR/Vdet-IC	LDO, 5.0V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R27	-	TK11227UM	LVR-IC	LDO, 2.7V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R27	kb	XC6383C271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R27N	-	R5510H027N	LVR/Vdet-IC	LDO, 5.1V±2%, 300mA/VDet, -Reset ODO	SOT-89-5	32sk	VR15	6h	Ric
R28	-	TK11228UM	LVR-IC	LDO, 2.8V±2.4%, 150mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R28	kb	XC6383C281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R29	-	TK11229UM	LVR-IC	LDO, 2.9V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R29	kb	XC6383C291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R30	-	TK11230UM	LVR-IC	LDO, 3.0V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R30	kb	XC6383C301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R31	-	TK11231UM	LVR-IC	LDO, 3.1V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R31	kb	XC6383C311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R32	-	TK11232UM	LVR-IC	LDO, 3.2V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R32	kb	XC6383C321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R33	-	TK11233UM	LVR-IC	LDO, 3.3V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R33	kb	XC6383C331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R34	-	TK11234UM	LVR-IC	LDO, 3.4V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R34	kb	XC6383C341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R35	-	TK11235UM	LVR-IC	LDO, 3.5V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R35	kb	XC6383C351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R36	-	TK11236UM	LVR-IC	LDO, 3.6V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R36	kb	XC6383C361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R37	-	TK11237UM	LVR-IC	LDO, 3.7V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R37	kb	XC6383C371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R38	-	TK11238UM	LVR-IC	LDO, 3.8V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R38	kb	XC6383C381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R39	-	TK11239UM	LVR-IC	LDO, 3.9V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R39	kb	XC6383C391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R40	-	TK11240UM	LVR-IC	LDO, 4.0V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R40	kb	XC6383C401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R41	-	TK11241UM	LVR-IC	LDO, 4.1V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R41	kb	XC6383C411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R42	-	TK11242UM	LVR-IC	LDO, 4.2V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R42	kb	XC6383C421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R43	-	TK11243UM	LVR-IC	LDO, 4.3V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R43	kb	XC6383C431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R44	-	TK11244UM	LVR-IC	LDO, 4.4V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R44	kb	XC6383C441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R45	-	TK11245UM	LVR-IC	LDO, 4.5V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R45	kb	XC6383C451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R46	-	TK11246UM	LVR-IC	LDO, 4.6V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R46	kb	XC6383C461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R47	-	TK11247UM	LVR-IC	LDO, 4.7V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R47	kb	XC6383C471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R48	-	TK11248UM	LVR-IC	LDO, 4.8V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R48	kb	XC6383C481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R49	-	TK11249UM	LVR-IC	LDO, 4.9V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R49	kb	XC6383C491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R50	-	TK11250UM	LVR-IC	LDO, 5.0V±5%, 170mA, +CE	SOT-89-5	32vg	VR7	6i	Tok
R50	kb	XC6383C501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R51	kb	XC6383C511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R52	kb	XC6383C521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R53	kb	XC6383C531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R54	kb	XC6383C541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R55	kb	XC6383C551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R56	kb	XC6383C561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R57	kb	XC6383C571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R58	kb	XC6383C581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R59	kb	XC6383C591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R60	kb	XC6383C601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R61	kb	XC6383C611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R62	kb	XC6383C621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R63	kb	XC6383C631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R64	kb	XC6383C641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R65	kb	XC6383C651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R66	kb	XC6383C661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R67	kb	XC6383C671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R68	kb	XC6383C681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R69	kb	XC6383C691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
R70	kb	XC6383C701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, +CE	SOT-89-5	32gb	DC3	6u	Tor
S020	-	R1191H020B	LVR-IC	LDO, 2.0V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S021	-	R1191H021B	LVR-IC	LDO, 2.1V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S022	-	R1191H022B	LVR-IC	LDO, 2.2V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S023	-	R1191H023B	LVR-IC	LDO, 2.3V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S024	-	R1191H024B	LVR-IC	LDO, 2.4V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S025	-	R1191H025B	LVR-IC	LDO, 2.5V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S026	-	R1191H026B	LVR-IC	LDO, 2.6V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S027	-	R1191H027B	LVR-IC	LDO, 2.7V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S028	-	R1191H028B	LVR-IC	LDO, 2.8V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S029	-	R1191H029B	LVR-IC	LDO, 2.9V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S030	-	R1191H030B	LVR-IC	LDO, 3.0V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S031	-	R1191H031B	LVR-IC	LDO, 3.1V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S032	-	R1191H032B	LVR-IC	LDO, 3.2V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S033	-	R1191H033B	LVR-IC	LDO, 3.3V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S034	-	R1191H034B	LVR-IC	LDO, 3.4V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S035	-	R1191H035B	LVR-IC	LDO, 3.5V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S036	-	R1191H036B	LVR-IC	LDO, 3.6V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S037	-	R1191H037B	LVR-IC	LDO, 3.7V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S038	-	R1191H038B	LVR-IC	LDO, 3.8V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S039	-	R1191H039B	LVR-IC	LDO, 3.9V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S040	-	R1191H040B	LVR-IC	LDO, 4.0V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S041	-	R1191H041B	LVR-IC	LDO, 4.1V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S042	-	R1191H042B	LVR-IC	LDO, 4.2V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S043	-	R1191H043B	LVR-IC	LDO, 4.3V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S044	-	R1191H044B	LVR-IC	LDO, 4.4V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S045	-	R1191H045B	LVR-IC	LDO, 4.5V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S046	-	R1191H046B	LVR-IC	LDO, 4.6V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S047	-	R1191H047B	LVR-IC	LDO, 4.7V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S048	-	R1191H048B	LVR-IC	LDO, 4.8V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S049	-	R1191H049B	LVR-IC	LDO, 4.9V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S050	-	R1191H050B	LVR-IC	LDO, 5.0V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S051	-	R1191H051B	LVR-IC	LDO, 5.1V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S052	-	R1191H052B	LVR-IC	LDO, 5.2V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S053	-	R1191H053B	LVR-IC	LDO, 5.3V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S054	-	R1191H054B	LVR-IC	LDO, 5.4V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S055	-	R1191H055B	LVR-IC	LDO, 5.5V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S056	-	R1191H056B	LVR-IC	LDO, 5.6V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S057	-	R1191H057B	LVR-IC	LDO, 5.7V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S058	-	R1191H058B	LVR-IC	LDO, 5.8V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S059	-	R1191H059B	LVR-IC	LDO, 5.9V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S060	-	R1191H060B	LVR-IC	LDO, 6.0V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S061	-	R1191H061B	LVR-IC	LDO, 6.1V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S062	-	R1191H062B	LVR-IC	LDO, 6.2V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S063	-	R1191H063B	LVR-IC	LDO, 6.3V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S064	-	R1191H064B	LVR-IC	LDO, 6.4V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S065	-	R1191H065B	LVR-IC	LDO, 6.5V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S066	-	R1191H066B	LVR-IC	LDO, 6.6V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S067	-	R1191H067B	LVR-IC	LDO, 6.7V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S068	-	R1191H068B	LVR-IC	LDO, 6.8V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S069	-	R1191H069B	LVR-IC	LDO, 6.9V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S070	-	R1191H070B	LVR-IC	LDO, 7.0V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S071	-	R1191H071B	LVR-IC	LDO, 7.1V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S072	-	R1191H072B	LVR-IC	LDO, 7.2V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S073	-	R1191H073B	LVR-IC	LDO, 7.3V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S074	-	R1191H074B	LVR-IC	LDO, 7.4V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S075	-	R1191H075B	LVR-IC	LDO, 7.5V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S076	-	R1191H076B	LVR-IC	LDO, 7.6V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S077	-	R1191H077B	LVR-IC	LDO, 7.7V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S078	-	R1191H078B	LVR-IC	LDO, 7.8V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S079	-	R1191H079B	LVR-IC	LDO, 7.9V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S080	-	R1191H080B	LVR-IC	LDO, 8.0V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S081	-	R1191H081B	LVR-IC	LDO, 8.1V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S082	-	R1191H082B	LVR-IC	LDO, 8.2V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S083	-	R1191H083B	LVR-IC	LDO, 8.3V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S084	-	R1191H084B	LVR-IC	LDO, 8.4V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S085	-	R1191H085B	LVR-IC	LDO, 8.5V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S086	-	R1191H086B	LVR-IC	LDO, 8.6V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S087	-	R1191H087B	LVR-IC	LDO, 8.7V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S088	-	R1191H088B	LVR-IC	LDO, 8.8V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S089	-	R1191H089B	LVR-IC	LDO, 8.9V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S090	-	R1191H090B	LVR-IC	LDO, 9.0V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S091	-	R1191H091B	LVR-IC	LDO, 9.1V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S092	-	R1191H092B	LVR-IC	LDO, 9.2V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S093	-	R1191H093B	LVR-IC	LDO, 9.3V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S094	-	R1191H094B	LVR-IC	LDO, 9.4V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S095	-	R1191H095B	LVR-IC	LDO, 9.5V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S096	-	R1191H096B	LVR-IC	LDO, 9.6V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S097	-	R1191H097B	LVR-IC	LDO, 9.7V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S098	-	R1191H098B	LVR-IC	LDO, 9.8V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S099	-	R1191H099B	LVR-IC	LDO, 9.9V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S100	-	R1191H100B	LVR-IC	LDO, 10.0V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S101	-	R1191H101B	LVR-IC	LDO, 10.1V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S102	-	R1191H102B	LVR-IC	LDO, 10.2V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S103	-	R1191H103B	LVR-IC	LDO, 10.3V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S104	-	R1191H104B	LVR-IC	LDO, 10.4V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S105	-	R1191H105B	LVR-IC	LDO, 10.5V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S106	-	R1191H106B	LVR-IC	LDO, 10.6V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S107	-	R1191H107B	LVR-IC	LDO, 10.7V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S108	-	R1191H108B	LVR-IC	LDO, 10.8V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S109	-	R1191H109B	LVR-IC	LDO, 10.9V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S110	-	R1191H110B	LVR-IC	LDO, 11.0V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S111	-	R1191H111B	LVR-IC	LDO, 11.1V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S112	-	R1191H112B	LVR-IC	LDO, 11.2V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S113	-	R1191H113B	LVR-IC	LDO, 11.3V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S114	-	R1191H114B	LVR-IC	LDO, 11.4V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S115	-	R1191H115B	LVR-IC	LDO, 11.5V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S116	-	R1191H116B	LVR-IC	LDO, 11.6V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S117	-	R1191H117B	LVR-IC	LDO, 11.7V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S118	-	R1191H118B	LVR-IC	LDO, 11.8V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S119	-	R1191H119B	LVR-IC	LDO, 11.9V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S120	-	R1191H120B	LVR-IC	LDO, 12.0V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S121	-	R1191H121B	LVR-IC	LDO, 12.1V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S122	-	R1191H122B	LVR-IC	LDO, 12.2V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S123	-	R1191H123B	LVR-IC	LDO, 12.3V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S124	-	R1191H124B	LVR-IC	LDO, 12.4V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S125	-	R1191H125B	LVR-IC	LDO, 12.5V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S126	-	R1191H126B	LVR-IC	LDO, 12.6V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S127	-	R1191H127B	LVR-IC	LDO, 12.7V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S128	-	R1191H128B	LVR-IC	LDO, 12.8V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S129	-	R1191H129B	LVR-IC	LDO, 12.9V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S130	-	R1191H130B	LVR-IC	LDO, 13.0V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S131	-	R1191H131B	LVR-IC	LDO, 13.1V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S132	-	R1191H132B	LVR-IC	LDO, 13.2V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S133	-	R1191H133B	LVR-IC	LDO, 13.3V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S134	-	R1191H134B	LVR-IC	LDO, 13.4V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S135	-	R1191H135B	LVR-IC	LDO, 13.5V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S136	-	R1191H136B	LVR-IC	LDO, 13.6V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S137	-	R1191H137B	LVR-IC	LDO, 13.7V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S138	-	R1191H138B	LVR-IC	LDO, 13.8V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S139	-	R1191H139B	LVR-IC	LDO, 13.9V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S140	-	R1191H140B	LVR-IC	LDO, 14.0V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S141	-	R1191H141B	LVR-IC	LDO, 14.1V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S142	-	R1191H142B	LVR-IC	LDO, 14.2V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S143	-	R1191H143B	LVR-IC	LDO, 14.3V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S144	-	R1191H144B	LVR-IC	LDO, 14.4V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S145	-	R1191H145B	LVR-IC	LDO, 14.5V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S146	-	R1191H146B	LVR-IC	LDO, 14.6V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S147	-	R1191H147B	LVR-IC	LDO, 14.7V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S148	-	R1191H148B	LVR-IC	LDO, 14.8V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S149	-	R1191H149B	LVR-IC	LDO, 14.9V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S150	-	R1191H150B	LVR-IC	LDO, 15.0V±1.5%, 300mA, +CE, ECO	SOT-89-5	32c8	VR10	6h	Ric
S20	ka	XC6371E201P	DC-DC-IC	PWM step-up, 100kHz, 2.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S21	ka	XC6371E211P	DC-DC-IC	PWM step-up, 100kHz, 2.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S22	ka	XC6371E221P	DC-DC-IC	PWM step-up, 100kHz, 2.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S23	ka	XC6371E231P	DC-DC-IC	PWM step-up, 100kHz, 2.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S24	ka	XC6371E241P	DC-DC-IC	PWM step-up, 100kHz, 2.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S25	ka	XC6371E251P	DC-DC-IC	PWM step-up, 100kHz, 2.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S26	ka	XC6371E261P	DC-DC-IC	PWM step-up, 100kHz, 2.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S27	ka	XC6371E271P	DC-DC-IC	PWM step-up, 100kHz, 2.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S28	ka	XC6371E281P	DC-DC-IC	PWM step-up, 100kHz, 2.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S29	ka	XC6371E291P	DC-DC-IC	PWM step-up, 100kHz, 2.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S2A	ka	XC6371E202P	DC-DC-IC	PWM step-up, 180kHz, 2.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S2B	ka	XC6371E212P	DC-DC-IC	PWM step-up, 180kHz, 2.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S2C	ka	XC6371E222P	DC-DC-IC	PWM step-up, 180kHz, 2.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S2D	ka	XC6371E232P	DC-DC-IC	PWM step-up, 180kHz, 2.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S2E	ka	XC6371E242P	DC-DC-IC	PWM step-up, 180kHz, 2.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S2F	ka	XC6371E252P	DC-DC-IC	PWM step-up, 180kHz, 2.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S2H	ka	XC6371E262P	DC-DC-IC	PWM step-up, 180kHz, 2.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S2K	ka	XC6371E272P	DC-DC-IC	PWM step-up, 180kHz, 2.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S2L	ka	XC6371E282P	DC-DC-IC	PWM step-up, 180kHz, 2.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S2M	ka	XC6371E292P	DC-DC-IC	PWM step-up, 180kHz, 2.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S30	ka	XC6371E301P	DC-DC-IC	PWM step-up, 100kHz, 3.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S31	ka	XC6371E311P	DC-DC-IC	PWM step-up, 100kHz, 3.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S32	ka	XC6371E321P	DC-DC-IC	PWM step-up, 100kHz, 3.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S33	ka	XC6371E331P	DC-DC-IC	PWM step-up, 100kHz, 3.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S34	ka	XC6371E341P	DC-DC-IC	PWM step-up, 100kHz, 3.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S35	ka	XC6371E351P	DC-DC-IC	PWM step-up, 100kHz, 3.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S36	ka	XC6371E361P	DC-DC-IC	PWM step-up, 100kHz, 3.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S37	ka	XC6371E371P	DC-DC-IC	PWM step-up, 100kHz, 3.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S38	ka	XC6371E381P	DC-DC-IC	PWM step-up, 100kHz, 3.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S39	ka	XC6371E391P	DC-DC-IC	PWM step-up, 100kHz, 3.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S3A	ka	XC6371E302P	DC-DC-IC	PWM step-up, 180kHz, 3.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S3B	ka	XC6371E312P	DC-DC-IC	PWM step-up, 180kHz, 3.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S3C	ka	XC6371E322P	DC-DC-IC	PWM step-up, 180kHz, 3.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S3D	ka	XC6371E332P	DC-DC-IC	PWM step-up, 180kHz, 3.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S3E	ka	XC6371E342P	DC-DC-IC	PWM step-up, 180kHz, 3.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S3F	ka	XC6371E352P	DC-DC-IC	PWM step-up, 180kHz, 3.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S3H	ka	XC6371E362P	DC-DC-IC	PWM step-up, 180kHz, 3.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S3K	ka	XC6371E372P	DC-DC-IC	PWM step-up, 180kHz, 3.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S3L	ka	XC6371E382P	DC-DC-IC	PWM step-up, 180kHz, 3.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S3M	ka	XC6371E392P	DC-DC-IC	PWM step-up, 180kHz, 3.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S40	ka	XC6371E401P	DC-DC-IC	PWM step-up, 100kHz, 4.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S41	ka	XC6371E411P	DC-DC-IC	PWM step-up, 100kHz, 4.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S42	ka	XC6371E421P	DC-DC-IC	PWM step-up, 100kHz, 4.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S43	ka	XC6371E431P	DC-DC-IC	PWM step-up, 100kHz, 4.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S44	ka	XC6371E441P	DC-DC-IC	PWM step-up, 100kHz, 4.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S45	ka	XC6371E451P	DC-DC-IC	PWM step-up, 100kHz, 4.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S46	ka	XC6371E461P	DC-DC-IC	PWM step-up, 100kHz, 4.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S47	ka	XC6371E471P	DC-DC-IC	PWM step-up, 100kHz, 4.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S48	ka	XC6371E481P	DC-DC-IC	PWM step-up, 100kHz, 4.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S49	ka	XC6371E491P	DC-DC-IC	PWM step-up, 100kHz, 4.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S4A	ka	XC6371E402P	DC-DC-IC	PWM step-up, 180kHz, 4.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S4B	ka	XC6371E412P	DC-DC-IC	PWM step-up, 180kHz, 4.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S4C	ka	XC6371E422P	DC-DC-IC	PWM step-up, 180kHz, 4.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S4D	ka	XC6371E432P	DC-DC-IC	PWM step-up, 180kHz, 4.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S4E	ka	XC6371E442P	DC-DC-IC	PWM step-up, 180kHz, 4.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S4F	ka	XC6371E452P	DC-DC-IC	PWM step-up, 180kHz, 4.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S4H	ka	XC6371E462P	DC-DC-IC	PWM step-up, 180kHz, 4.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S4K	ka	XC6371E472P	DC-DC-IC	PWM step-up, 180kHz, 4.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S4L	ka	XC6371E482P	DC-DC-IC	PWM step-up, 180kHz, 4.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S4M	ka	XC6371E492P	DC-DC-IC	PWM step-up, 180kHz, 4.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S50	ka	XC6371E501P	DC-DC-IC	PWM step-up, 100kHz, 5.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S51	ka	XC6371E511P	DC-DC-IC	PWM step-up, 100kHz, 5.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S52	ka	XC6371E521P	DC-DC-IC	PWM step-up, 100kHz, 5.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S53	ka	XC6371E531P	DC-DC-IC	PWM step-up, 100kHz, 5.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S54	ka	XC6371E541P	DC-DC-IC	PWM step-up, 100kHz, 5.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S55	ka	XC6371E551P	DC-DC-IC	PWM step-up, 100kHz, 5.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S56	ka	XC6371E561P	DC-DC-IC	PWM step-up, 100kHz, 5.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S57	ka	XC6371E571P	DC-DC-IC	PWM step-up, 100kHz, 5.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S58	ka	XC6371E581P	DC-DC-IC	PWM step-up, 100kHz, 5.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S59	ka	XC6371E591P	DC-DC-IC	PWM step-up, 100kHz, 5.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S5A	ka	XC6371E502P	DC-DC-IC	PWM step-up, 180kHz, 5.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S5B	ka	XC6371E512P	DC-DC-IC	PWM step-up, 180kHz, 5.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S5C	ka	XC6371E522P	DC-DC-IC	PWM step-up, 180kHz, 5.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S5D	ka	XC6371E532P	DC-DC-IC	PWM step-up, 180kHz, 5.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S5E	ka	XC6371E542P	DC-DC-IC	PWM step-up, 180kHz, 5.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S5F	ka	XC6371E552P	DC-DC-IC	PWM step-up, 180kHz, 5.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S5H	ka	XC6371E562P	DC-DC-IC	PWM step-up, 180kHz, 5.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S5K	ka	XC6371E572P	DC-DC-IC	PWM step-up, 180kHz, 5.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S5L	ka	XC6371E582P	DC-DC-IC	PWM step-up, 180kHz, 5.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S5M	ka	XC6371E592P	DC-DC-IC	PWM step-up, 180kHz, 5.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S60	ka	XC6371E601P	DC-DC-IC	PWM step-up, 100kHz, 6.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S61	ka	XC6371E611P	DC-DC-IC	PWM step-up, 100kHz, 6.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S62	ka	XC6371E621P	DC-DC-IC	PWM step-up, 100kHz, 6.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S63	ka	XC6371E631P	DC-DC-IC	PWM step-up, 100kHz, 6.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S64	ka	XC6371E641P	DC-DC-IC	PWM step-up, 100kHz, 6.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S65	ka	XC6371E651P	DC-DC-IC	PWM step-up, 100kHz, 6.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S66	ka	XC6371E661P	DC-DC-IC	PWM step-up, 100kHz, 6.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S67	ka	XC6371E671P	DC-DC-IC	PWM step-up, 100kHz, 6.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S68	ka	XC6371E681P	DC-DC-IC	PWM step-up, 100kHz, 6.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S69	ka	XC6371E691P	DC-DC-IC	PWM step-up, 100kHz, 6.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S6A	ka	XC6371E602P	DC-DC-IC	PWM step-up, 180kHz, 6.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S6B	ka	XC6371E612P	DC-DC-IC	PWM step-up, 180kHz, 6.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S6C	ka	XC6371E622P	DC-DC-IC	PWM step-up, 180kHz, 6.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S6D	ka	XC6371E632P	DC-DC-IC	PWM step-up, 180kHz, 6.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S6E	ka	XC6371E642P	DC-DC-IC	PWM step-up, 180kHz, 6.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S6F	ka	XC6371E652P	DC-DC-IC	PWM step-up, 180kHz, 6.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S6H	ka	XC6371E662P	DC-DC-IC	PWM step-up, 180kHz, 6.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S6K	ka	XC6371E672P	DC-DC-IC	PWM step-up, 180kHz, 6.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S6L	ka	XC6371E682P	DC-DC-IC	PWM step-up, 180kHz, 6.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S6M	ka	XC6371E692P	DC-DC-IC	PWM step-up, 180kHz, 6.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S70	ka	XC6371E701P	DC-DC-IC	PWM step-up, 100kHz, 7.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
S7A	ka	XC6371E702P	DC-DC-IC	PWM step-up, 180kHz, 7.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC0	-	XC6373E200P	DC-DC-IC	PWM step-up, 30kHz, 2.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC0	ka	XC6371E200P	DC-DC-IC	PWM step-up, 50kHz, 2.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC0	kd	XC6373E200P	DC-DC-IC	PWM step-up, 30kHz, 2.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC1	-	XC6373E210P	DC-DC-IC	PWM step-up, 30kHz, 2.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC1	ka	XC6371E210P	DC-DC-IC	PWM step-up, 50kHz, 2.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC1	kd	XC6373E210P	DC-DC-IC	PWM step-up, 30kHz, 2.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC2	-	XC6373E220P	DC-DC-IC	PWM step-up, 30kHz, 2.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC2	ka	XC6371E220P	DC-DC-IC	PWM step-up, 50kHz, 2.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC2	kd	XC6373E220P	DC-DC-IC	PWM step-up, 30kHz, 2.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC3	-	XC6373E230P	DC-DC-IC	PWM step-up, 30kHz, 2.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC3	ka	XC6371E230P	DC-DC-IC	PWM step-up, 50kHz, 2.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC3	kd	XC6373E230P	DC-DC-IC	PWM step-up, 30kHz, 2.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC4	-	XC6373E240P	DC-DC-IC	PWM step-up, 30kHz, 2.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC4	ka	XC6371E240P	DC-DC-IC	PWM step-up, 50kHz, 2.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC4	kd	XC6373E240P	DC-DC-IC	PWM step-up, 30kHz, 2.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC5	-	XC6373E250P	DC-DC-IC	PWM step-up, 30kHz, 2.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC5	ka	XC6371E250P	DC-DC-IC	PWM step-up, 50kHz, 2.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC5	kd	XC6373E250P	DC-DC-IC	PWM step-up, 30kHz, 2.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC6	-	XC6373E260P	DC-DC-IC	PWM step-up, 30kHz, 2.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC6	ka	XC6371E260P	DC-DC-IC	PWM step-up, 50kHz, 2.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC6	kd	XC6373E260P	DC-DC-IC	PWM step-up, 30kHz, 2.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC7	-	XC6373E270P	DC-DC-IC	PWM step-up, 30kHz, 2.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC7	ka	XC6371E270P	DC-DC-IC	PWM step-up, 50kHz, 2.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC7	kd	XC6373E270P	DC-DC-IC	PWM step-up, 30kHz, 2.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC8	-	XC6373E280P	DC-DC-IC	PWM step-up, 30kHz, 2.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC8	ka	XC6371E280P	DC-DC-IC	PWM step-up, 50kHz, 2.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC8	kd	XC6373E280P	DC-DC-IC	PWM step-up, 30kHz, 2.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC9	-	XC6373E290P	DC-DC-IC	PWM step-up, 30kHz, 2.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC9	ka	XC6371E290P	DC-DC-IC	PWM step-up, 50kHz, 2.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SC9	kd	XC6373E290P	DC-DC-IC	PWM step-up, 30kHz, 2.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD0	-	XC6373E300P	DC-DC-IC	PWM step-up, 30kHz, 3.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD0	ka	XC6371E300P	DC-DC-IC	PWM step-up, 50kHz, 3.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD0	kd	XC6373E300P	DC-DC-IC	PWM step-up, 30kHz, 3.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD1	-	XC6373E310P	DC-DC-IC	PWM step-up, 30kHz, 3.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD1	ka	XC6371E310P	DC-DC-IC	PWM step-up, 50kHz, 3.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD1	kd	XC6373E310P	DC-DC-IC	PWM step-up, 30kHz, 3.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD2	-	XC6373E320P	DC-DC-IC	PWM step-up, 30kHz, 3.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD2	ka	XC6371E320P	DC-DC-IC	PWM step-up, 50kHz, 3.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD2	kd	XC6373E320P	DC-DC-IC	PWM step-up, 30kHz, 3.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SD3	-	XC6373E330P	DC-DC-IC	PWM step-up, 30kHz, 3.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD3	ka	XC6371E330P	DC-DC-IC	PWM step-up, 50kHz, 3.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD3	kd	XC6373E330P	DC-DC-IC	PWM step-up, 30kHz, 3.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD4	-	XC6373E340P	DC-DC-IC	PWM step-up, 30kHz, 3.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD4	ka	XC6371E340P	DC-DC-IC	PWM step-up, 50kHz, 3.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD4	kd	XC6373E340P	DC-DC-IC	PWM step-up, 30kHz, 3.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD5	-	XC6373E350P	DC-DC-IC	PWM step-up, 30kHz, 3.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD5	ka	XC6371E350P	DC-DC-IC	PWM step-up, 50kHz, 3.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD5	kd	XC6373E350P	DC-DC-IC	PWM step-up, 30kHz, 3.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD6	-	XC6373E360P	DC-DC-IC	PWM step-up, 30kHz, 3.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD6	ka	XC6371E360P	DC-DC-IC	PWM step-up, 50kHz, 3.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD6	kd	XC6373E360P	DC-DC-IC	PWM step-up, 30kHz, 3.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD7	-	XC6373E370P	DC-DC-IC	PWM step-up, 30kHz, 3.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD7	ka	XC6371E370P	DC-DC-IC	PWM step-up, 50kHz, 3.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD7	kd	XC6373E370P	DC-DC-IC	PWM step-up, 30kHz, 3.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD8	-	XC6373E380P	DC-DC-IC	PWM step-up, 30kHz, 3.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD8	ka	XC6371E380P	DC-DC-IC	PWM step-up, 50kHz, 3.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD8	kd	XC6373E380P	DC-DC-IC	PWM step-up, 30kHz, 3.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD9	-	XC6373E390P	DC-DC-IC	PWM step-up, 30kHz, 3.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD9	ka	XC6371E390P	DC-DC-IC	PWM step-up, 50kHz, 3.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SD9	kd	XC6373E390P	DC-DC-IC	PWM step-up, 30kHz, 3.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE0	-	XC6373E400P	DC-DC-IC	PWM step-up, 30kHz, 4.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE0	ka	XC6371E400P	DC-DC-IC	PWM step-up, 50kHz, 4.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE0	kd	XC6373E400P	DC-DC-IC	PWM step-up, 30kHz, 4.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE1	-	XC6373E410P	DC-DC-IC	PWM step-up, 30kHz, 4.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE1	ka	XC6371E410P	DC-DC-IC	PWM step-up, 50kHz, 4.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE1	kd	XC6373E410P	DC-DC-IC	PWM step-up, 30kHz, 4.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE2	-	S-1135A34-U5T1G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SE2	-	XC6373E420P	DC-DC-IC	PWM step-up, 30kHz, 4.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE2	ka	XC6371E420P	DC-DC-IC	PWM step-up, 50kHz, 4.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE2	kd	XC6373E420P	DC-DC-IC	PWM step-up, 30kHz, 4.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE3	-	S-1135A35-U5T1G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SE3	-	XC6373E430P	DC-DC-IC	PWM step-up, 30kHz, 4.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE3	ka	XC6371E430P	DC-DC-IC	PWM step-up, 50kHz, 4.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE3	kd	XC6373E430P	DC-DC-IC	PWM step-up, 30kHz, 4.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE4	-	XC6373E440P	DC-DC-IC	PWM step-up, 30kHz, 4.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE4	ka	XC6371E440P	DC-DC-IC	PWM step-up, 50kHz, 4.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE4	kd	XC6373E440P	DC-DC-IC	PWM step-up, 30kHz, 4.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE5	-	XC6373E450P	DC-DC-IC	PWM step-up, 30kHz, 4.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE5	ka	XC6371E450P	DC-DC-IC	PWM step-up, 50kHz, 4.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE5	kd	XC6373E450P	DC-DC-IC	PWM step-up, 30kHz, 4.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE6	-	XC6373E460P	DC-DC-IC	PWM step-up, 30kHz, 4.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE6	ka	XC6371E460P	DC-DC-IC	PWM step-up, 50kHz, 4.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE6	kd	XC6373E460P	DC-DC-IC	PWM step-up, 30kHz, 4.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE7	-	XC6373E470P	DC-DC-IC	PWM step-up, 30kHz, 4.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE7	ka	XC6371E470P	DC-DC-IC	PWM step-up, 50kHz, 4.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE7	kd	XC6373E470P	DC-DC-IC	PWM step-up, 30kHz, 4.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE8	-	XC6373E480P	DC-DC-IC	PWM step-up, 30kHz, 4.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE8	ka	XC6371E480P	DC-DC-IC	PWM step-up, 50kHz, 4.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE8	kd	XC6373E480P	DC-DC-IC	PWM step-up, 30kHz, 4.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE9	-	XC6373E490P	DC-DC-IC	PWM step-up, 30kHz, 4.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE9	ka	XC6371E490P	DC-DC-IC	PWM step-up, 50kHz, 4.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SE9	kd	XC6373E490P	DC-DC-IC	PWM step-up, 30kHz, 4.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SEA	-	S-1135A10-U5T1G	LVR-IC	LDO, 1.0V±15mV, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEB	-	S-1135A11-U5T1G	LVR-IC	LDO, 1.1V±15mV, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEC	-	S-1135A12-U5T1G	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SED	-	S-1135A13-U5T1G	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEE	-	S-1135A14-U5T1G	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEF	-	S-1135A15-U5T1G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEG	-	S-1135A16-U5T1G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEH	-	S-1135A17-U5T1G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEI	-	S-1135A18-U5T1G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEJ	-	S-1135A1J-U5T1G	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEK	-	S-1135A19-U5T1G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEL	-	S-1135A20-U5T1G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEM	-	S-1135A21-U5T1G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEN	-	S-1135A22-U5T1G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEO	-	S-1135A23-U5T1G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEP	-	S-1135A24-U5T1G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEQ	-	S-1135A25-U5T1G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SER	-	S-1135A26-U5T1G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SES	-	S-1135A27-U5T1G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SET	-	S-1135A28-U5T1G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEU	-	S-1135A2J-U5T1G	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEV	-	S-1135A29-U5T1G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEW	-	S-1135A30-U5T1G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEX	-	S-1135A31-U5T1G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEY	-	S-1135A32-U5T1G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SEZ	-	S-1135A33-U5T1G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32vr4	VR4	6n	Sii
SF	-	ELM99152B	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
SF0	-	XC6373E500P	DC-DC-IC	PWM step-up, 30kHz, 5.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF0	ka	XC6371E500P	DC-DC-IC	PWM step-up, 50kHz, 5.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF0	kd	XC6373E500P	DC-DC-IC	PWM step-up, 30kHz, 5.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF1	-	XC6373E510P	DC-DC-IC	PWM step-up, 30kHz, 5.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF1	ka	XC6371E510P	DC-DC-IC	PWM step-up, 50kHz, 5.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF1	kd	XC6373E510P	DC-DC-IC	PWM step-up, 30kHz, 5.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF2	-	XC6373E520P	DC-DC-IC	PWM step-up, 30kHz, 5.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF2	ka	XC6371E520P	DC-DC-IC	PWM step-up, 50kHz, 5.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF2	kd	XC6373E520P	DC-DC-IC	PWM step-up, 30kHz, 5.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF3	-	XC6373E530P	DC-DC-IC	PWM step-up, 30kHz, 5.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF3	ka	XC6371E530P	DC-DC-IC	PWM step-up, 50kHz, 5.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF3	kd	XC6373E530P	DC-DC-IC	PWM step-up, 30kHz, 5.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF4	-	XC6373E540P	DC-DC-IC	PWM step-up, 30kHz, 5.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF4	ka	XC6371E540P	DC-DC-IC	PWM step-up, 50kHz, 5.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF4	kd	XC6373E540P	DC-DC-IC	PWM step-up, 30kHz, 5.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF5	-	XC6373E550P	DC-DC-IC	PWM step-up, 30kHz, 5.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF5	ka	XC6371E550P	DC-DC-IC	PWM step-up, 50kHz, 5.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF5	kd	XC6373E550P	DC-DC-IC	PWM step-up, 30kHz, 5.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF6	-	XC6373E560P	DC-DC-IC	PWM step-up, 30kHz, 5.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF6	ka	XC6371E560P	DC-DC-IC	PWM step-up, 50kHz, 5.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF6	kd	XC6373E560P	DC-DC-IC	PWM step-up, 30kHz, 5.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF7	-	XC6373E570P	DC-DC-IC	PWM step-up, 30kHz, 5.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF7	ka	XC6371E570P	DC-DC-IC	PWM step-up, 50kHz, 5.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF7	kd	XC6373E570P	DC-DC-IC	PWM step-up, 30kHz, 5.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF8	-	XC6373E580P	DC-DC-IC	PWM step-up, 30kHz, 5.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF8	ka	XC6371E580P	DC-DC-IC	PWM step-up, 50kHz, 5.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF8	kd	XC6373E580P	DC-DC-IC	PWM step-up, 30kHz, 5.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF9	-	XC6373E590P	DC-DC-IC	PWM step-up, 30kHz, 5.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF9	ka	XC6371E590P	DC-DC-IC	PWM step-up, 50kHz, 5.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SF9	kd	XC6373E590P	DC-DC-IC	PWM step-up, 30kHz, 5.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SG	-	ELM99162B	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
SG2	-	S-1135B34-U5T1G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SG3	-	S-1135B35-U5T1G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGA	-	S-1135B10-U5T1G	LVR-IC	LDO, 1.0V±15mV, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGB	-	S-1135B11-U5T1G	LVR-IC	LDO, 1.1V±15mV, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGC	-	S-1135B12-U5T1G	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGD	-	S-1135B13-U5T1G	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGE	-	S-1135B14-U5T1G	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGF	-	S-1135B15-U5T1G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGG	-	S-1135B16-U5T1G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGH	-	S-1135B17-U5T1G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGI	-	S-1135B18-U5T1G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGJ	-	S-1135B1J-U5T1G	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGK	-	S-1135B19-U5T1G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGL	-	S-1135B20-U5T1G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGM	-	S-1135B21-U5T1G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGN	-	S-1135B22-U5T1G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGO	-	S-1135B23-U5T1G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGP	-	S-1135B24-U5T1G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGQ	-	S-1135B25-U5T1G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGR	-	S-1135B26-U5T1G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGS	-	S-1135B27-U5T1G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGT	-	S-1135B28-U5T1G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGU	-	S-1135B2J-U5T1G	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGV	-	S-1135B29-U5T1G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGW	-	S-1135B30-U5T1G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGX	-	S-1135B31-U5T1G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGY	-	S-1135B32-U5T1G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SGZ	-	S-1135B33-U5T1G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, CL	SOT-89-5	32vr4	VR4	6n	Sii
SH	-	ELM99172B	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SH0	-	XC6373E600P	DC-DC-IC	PWM step-up, 30kHz, 6.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH0	ka	XC6371E600P	DC-DC-IC	PWM step-up, 50kHz, 6.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH0	kd	XC6373E600P	DC-DC-IC	PWM step-up, 30kHz, 6.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH1	-	XC6373E610P	DC-DC-IC	PWM step-up, 30kHz, 6.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH1	ka	XC6371E610P	DC-DC-IC	PWM step-up, 50kHz, 6.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH1	kd	XC6373E610P	DC-DC-IC	PWM step-up, 30kHz, 6.1V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH2	-	XC6373E620P	DC-DC-IC	PWM step-up, 30kHz, 6.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH2	ka	XC6371E620P	DC-DC-IC	PWM step-up, 50kHz, 6.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH2	kd	XC6373E620P	DC-DC-IC	PWM step-up, 30kHz, 6.2V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH3	-	XC6373E630P	DC-DC-IC	PWM step-up, 30kHz, 6.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH3	ka	XC6371E630P	DC-DC-IC	PWM step-up, 50kHz, 6.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH3	kd	XC6373E630P	DC-DC-IC	PWM step-up, 30kHz, 6.3V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH4	-	XC6373E640P	DC-DC-IC	PWM step-up, 30kHz, 6.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH4	ka	XC6371E640P	DC-DC-IC	PWM step-up, 50kHz, 6.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH4	kd	XC6373E640P	DC-DC-IC	PWM step-up, 30kHz, 6.4V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH5	-	XC6373E650P	DC-DC-IC	PWM step-up, 30kHz, 6.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH5	ka	XC6371E650P	DC-DC-IC	PWM step-up, 50kHz, 6.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH5	kd	XC6373E650P	DC-DC-IC	PWM step-up, 30kHz, 6.5V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH6	-	XC6373E660P	DC-DC-IC	PWM step-up, 30kHz, 6.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH6	ka	XC6371E660P	DC-DC-IC	PWM step-up, 50kHz, 6.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH6	kd	XC6373E660P	DC-DC-IC	PWM step-up, 30kHz, 6.6V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH7	-	XC6373E670P	DC-DC-IC	PWM step-up, 30kHz, 6.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH7	ka	XC6371E670P	DC-DC-IC	PWM step-up, 50kHz, 6.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH7	kd	XC6373E670P	DC-DC-IC	PWM step-up, 30kHz, 6.7V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH8	-	XC6373E680P	DC-DC-IC	PWM step-up, 30kHz, 6.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH8	ka	XC6371E680P	DC-DC-IC	PWM step-up, 50kHz, 6.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH8	kd	XC6373E680P	DC-DC-IC	PWM step-up, 30kHz, 6.8V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH9	-	XC6373E690P	DC-DC-IC	PWM step-up, 30kHz, 6.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH9	ka	XC6371E690P	DC-DC-IC	PWM step-up, 50kHz, 6.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SH9	kd	XC6373E690P	DC-DC-IC	PWM step-up, 30kHz, 6.9V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SJ	-	ELM99182B	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
SK	-	ELM99192B	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	SOT-89-5	32vrt	VR1	6n	Elm
SK0	-	XC6373E700P	DC-DC-IC	PWM step-up, 30kHz, 7.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SK0	ka	XC6371E700P	DC-DC-IC	PWM step-up, 50kHz, 7.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SK0	kd	XC6373E700P	DC-DC-IC	PWM step-up, 30kHz, 7.0V±2.5%, 100mA, int. Vdd	SOT-89-5	32gc	DC4	6h	Tor
SOA	-	S-1172B10-U5T1G	LVR-IC	LDO, 1.0V±15mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOB	-	S-1172B11-U5T1G	LVR-IC	LDO, 1.1V±15mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOC	-	S-1172B12-U5T1G	LVR-IC	LDO, 1.2V±15mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOD	-	S-1172B13-U5T1G	LVR-IC	LDO, 1.3V±15mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOE	-	S-1172B14-U5T1G	LVR-IC	LDO, 1.4V±15mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOF	-	S-1172B15-U5T1G	LVR-IC	LDO, 1.5V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOG	-	S-1172B16-U5T1G	LVR-IC	LDO, 1.6V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOH	-	S-1172B17-U5T1G	LVR-IC	LDO, 1.7V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOI	-	S-1172B18-U5T1G	LVR-IC	LDO, 1.8V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOJ	-	S-1172B1J-U5T1G	LVR-IC	LDO, 1.85V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOK	-	S-1172B19-U5T1G	LVR-IC	LDO, 1.9V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOL	-	S-1172B20-U5T1G	LVR-IC	LDO, 2.0V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOM	-	S-1172B21-U5T1G	LVR-IC	LDO, 2.1V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SON	-	S-1172B22-U5T1G	LVR-IC	LDO, 2.2V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOO	-	S-1172B23-U5T1G	LVR-IC	LDO, 2.3V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOP	-	S-1172B24-U5T1G	LVR-IC	LDO, 2.4V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOQ	-	S-1172B25-U5T1G	LVR-IC	LDO, 2.5V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOR	-	S-1172B26-U5T1G	LVR-IC	LDO, 2.6V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOS	-	S-1172B27-U5T1G	LVR-IC	LDO, 2.7V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOT	-	S-1172B28-U5T1G	LVR-IC	LDO, 2.8V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOU	-	S-1172B2J-U5T1G	LVR-IC	LDO, 2.85V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOV	-	S-1172B29-U5T1G	LVR-IC	LDO, 2.9V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOW	-	S-1172B30-U5T1G	LVR-IC	LDO, 3.0V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOX	-	S-1172B31-U5T1G	LVR-IC	LDO, 3.1V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOY	-	S-1172B32-U5T1G	LVR-IC	LDO, 3.2V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SOZ	-	S-1172B33-U5T1G	LVR-IC	LDO, 3.3V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPA	-	S-1172B34-U5T1G	LVR-IC	LDO, 3.4V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPB	-	S-1172B35-U5T1G	LVR-IC	LDO, 3.5V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPC	-	S-1172B36-U5T1G	LVR-IC	LDO, 3.6V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPD	-	S-1172B37-U5T1G	LVR-IC	LDO, 3.7V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPE	-	S-1172B38-U5T1G	LVR-IC	LDO, 3.8V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPF	-	S-1172B39-U5T1G	LVR-IC	LDO, 3.9V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPG	-	S-1172B40-U5T1G	LVR-IC	LDO, 4.0V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPH	-	S-1172B41-U5T1G	LVR-IC	LDO, 4.1V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPI	-	S-1172B42-U5T1G	LVR-IC	LDO, 4.2V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SPJ	-	S-1172B43-U5T1G	LVR-IC	LDO, 4.3V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPK	-	S-1172B44-U5T1G	LVR-IC	LDO, 4.4V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPL	-	S-1172B45-U5T1G	LVR-IC	LDO, 4.5V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPM	-	S-1172B46-U5T1G	LVR-IC	LDO, 4.6V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPN	-	S-1172B47-U5T1G	LVR-IC	LDO, 4.7V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPO	-	S-1172B48-U5T1G	LVR-IC	LDO, 4.8V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPP	-	S-1172B49-U5T1G	LVR-IC	LDO, 4.9V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPQ	-	S-1172B50-U5T1G	LVR-IC	LDO, 5.0V±1.0%, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
SPS	-	S-1172B1C-U5T1G	LVR-IC	LDO, 1.25V±15mV, 1A, +CE	SOT-89-5	32vy	VR4	6n	Sii
T020	-	R1191H020D	LVR-IC	LDO, 2.0V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T021	-	R1191H021D	LVR-IC	LDO, 2.1V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T022	-	R1191H022D	LVR-IC	LDO, 2.2V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T023	-	R1191H023D	LVR-IC	LDO, 2.3V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T024	-	R1191H024D	LVR-IC	LDO, 2.4V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T025	-	R1191H025D	LVR-IC	LDO, 2.5V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T026	-	R1191H026D	LVR-IC	LDO, 2.6V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T027	-	R1191H027D	LVR-IC	LDO, 2.7V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T028	-	R1191H028D	LVR-IC	LDO, 2.8V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T029	-	R1191H029D	LVR-IC	LDO, 2.9V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T030	-	R1191H030D	LVR-IC	LDO, 3.0V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T031	-	R1191H031D	LVR-IC	LDO, 3.1V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T032	-	R1191H032D	LVR-IC	LDO, 3.2V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T033	-	R1191H033D	LVR-IC	LDO, 3.3V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T034	-	R1191H034D	LVR-IC	LDO, 3.4V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T035	-	R1191H035D	LVR-IC	LDO, 3.5V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T036	-	R1191H036D	LVR-IC	LDO, 3.6V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T037	-	R1191H037D	LVR-IC	LDO, 3.7V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T038	-	R1191H038D	LVR-IC	LDO, 3.8V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T039	-	R1191H039D	LVR-IC	LDO, 3.9V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T040	-	R1191H040D	LVR-IC	LDO, 4.0V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T041	-	R1191H041D	LVR-IC	LDO, 4.1V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T042	-	R1191H042D	LVR-IC	LDO, 4.2V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T043	-	R1191H043D	LVR-IC	LDO, 4.3V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T044	-	R1191H044D	LVR-IC	LDO, 4.4V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T045	-	R1191H045D	LVR-IC	LDO, 4.5V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T046	-	R1191H046D	LVR-IC	LDO, 4.6V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T047	-	R1191H047D	LVR-IC	LDO, 4.7V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T048	-	R1191H048D	LVR-IC	LDO, 4.8V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T049	-	R1191H049D	LVR-IC	LDO, 4.9V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T050	-	R1191H050D	LVR-IC	LDO, 5.0V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T051	-	R1191H051D	LVR-IC	LDO, 5.1V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T052	-	R1191H052D	LVR-IC	LDO, 5.2V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T053	-	R1191H053D	LVR-IC	LDO, 5.3V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T054	-	R1191H054D	LVR-IC	LDO, 5.4V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T055	-	R1191H055D	LVR-IC	LDO, 5.5V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T056	-	R1191H056D	LVR-IC	LDO, 5.6V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T057	-	R1191H057D	LVR-IC	LDO, 5.7V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T058	-	R1191H058D	LVR-IC	LDO, 5.8V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T059	-	R1191H059D	LVR-IC	LDO, 5.9V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T060	-	R1191H060D	LVR-IC	LDO, 6.0V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T061	-	R1191H061D	LVR-IC	LDO, 6.1V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T062	-	R1191H062D	LVR-IC	LDO, 6.2V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T063	-	R1191H063D	LVR-IC	LDO, 6.3V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T064	-	R1191H064D	LVR-IC	LDO, 6.4V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T065	-	R1191H065D	LVR-IC	LDO, 6.5V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T066	-	R1191H066D	LVR-IC	LDO, 6.6V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T067	-	R1191H067D	LVR-IC	LDO, 6.7V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T068	-	R1191H068D	LVR-IC	LDO, 6.8V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T069	-	R1191H069D	LVR-IC	LDO, 6.9V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T070	-	R1191H070D	LVR-IC	LDO, 7.0V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T071	-	R1191H071D	LVR-IC	LDO, 7.1V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T072	-	R1191H072D	LVR-IC	LDO, 7.2V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T073	-	R1191H073D	LVR-IC	LDO, 7.3V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T074	-	R1191H074D	LVR-IC	LDO, 7.4V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T075	-	R1191H075D	LVR-IC	LDO, 7.5V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T076	-	R1191H076D	LVR-IC	LDO, 7.6V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T077	-	R1191H077D	LVR-IC	LDO, 7.7V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T078	-	R1191H078D	LVR-IC	LDO, 7.8V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T079	-	R1191H079D	LVR-IC	LDO, 7.9V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T080	-	R1191H080D	LVR-IC	LDO, 8.0V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T081	-	R1191H081D	LVR-IC	LDO, 8.1V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T082	-	R1191H082D	LVR-IC	LDO, 8.2V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T083	-	R1191H083D	LVR-IC	LDO, 8.3V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T084	-	R1191H084D	LVR-IC	LDO, 8.4V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T085	-	R1191H085D	LVR-IC	LDO, 8.5V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T086	-	R1191H086D	LVR-IC	LDO, 8.6V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T087	-	R1191H087D	LVR-IC	LDO, 8.7V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T088	-	R1191H088D	LVR-IC	LDO, 8.8V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T089	-	R1191H089D	LVR-IC	LDO, 8.9V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T090	-	R1191H090D	LVR-IC	LDO, 9.0V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T091	-	R1191H091D	LVR-IC	LDO, 9.1V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T092	-	R1191H092D	LVR-IC	LDO, 9.2V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T093	-	R1191H093D	LVR-IC	LDO, 9.3V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T094	-	R1191H094D	LVR-IC	LDO, 9.4V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T095	-	R1191H095D	LVR-IC	LDO, 9.5V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T096	-	R1191H096D	LVR-IC	LDO, 9.6V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T097	-	R1191H097D	LVR-IC	LDO, 9.7V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T098	-	R1191H098D	LVR-IC	LDO, 9.8V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T099	-	R1191H099D	LVR-IC	LDO, 9.9V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T100	-	R1191H100D	LVR-IC	LDO, 10.0V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T101	-	R1191H101D	LVR-IC	LDO, 10.1V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T102	-	R1191H102D	LVR-IC	LDO, 10.2V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T103	-	R1191H103D	LVR-IC	LDO, 10.3V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T104	-	R1191H104D	LVR-IC	LDO, 10.4V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T105	-	R1191H105D	LVR-IC	LDO, 10.5V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T106	-	R1191H106D	LVR-IC	LDO, 10.6V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T107	-	R1191H107D	LVR-IC	LDO, 10.7V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T108	-	R1191H108D	LVR-IC	LDO, 10.8V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T109	-	R1191H109D	LVR-IC	LDO, 10.9V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T10A	-	FC6209A192P	LVR-IC	LDO, 1.9V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T10A	-	ML6209A192P	LVR-IC	LDO, 1.9V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T10B	-	FC6209B192P	LVR-IC	LDO, 1.9V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T10B	-	ML6209B192P	LVR-IC	LDO, 1.9V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T10C	-	FC6209C192P	LVR-IC	LDO, 1.9V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T10C	-	ML6209C192P	LVR-IC	LDO, 1.9V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T10D	-	FC6209D192P	LVR-IC	LDO, 1.9V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T10D	-	ML6209D192P	LVR-IC	LDO, 1.9V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T110	-	R1191H110D	LVR-IC	LDO, 11.0V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T111	-	R1191H111D	LVR-IC	LDO, 11.1V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T112	-	R1191H112D	LVR-IC	LDO, 11.2V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T113	-	R1191H113D	LVR-IC	LDO, 11.3V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T114	-	R1191H114D	LVR-IC	LDO, 11.4V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T115	-	R1191H115D	LVR-IC	LDO, 11.5V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T116	-	R1191H116D	LVR-IC	LDO, 11.6V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T117	-	R1191H117D	LVR-IC	LDO, 11.7V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T118	-	R1191H118D	LVR-IC	LDO, 11.8V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T119	-	R1191H119D	LVR-IC	LDO, 11.9V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T120	-	R1191H120D	LVR-IC	LDO, 12.0V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T121	-	R1191H121D	LVR-IC	LDO, 12.1V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T122	-	R1191H122D	LVR-IC	LDO, 12.2V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T123	-	R1191H123D	LVR-IC	LDO, 12.3V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T124	-	R1191H124D	LVR-IC	LDO, 12.4V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T125	-	R1191H125D	LVR-IC	LDO, 12.5V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T126	-	R1191H126D	LVR-IC	LDO, 12.6V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T127	-	R1191H127D	LVR-IC	LDO, 12.7V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T128	-	R1191H128D	LVR-IC	LDO, 12.8V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T129	-	R1191H129D	LVR-IC	LDO, 12.9V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T130	-	R1191H130D	LVR-IC	LDO, 13.0V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T131	-	R1191H131D	LVR-IC	LDO, 13.1V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T132	-	R1191H132D	LVR-IC	LDO, 13.2V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T133	-	R1191H133D	LVR-IC	LDO, 13.3V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T134	-	R1191H134D	LVR-IC	LDO, 13.4V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T135	-	R1191H135D	LVR-IC	LDO, 13.5V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T136	-	R1191H136D	LVR-IC	LDO, 13.6V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T137	-	R1191H137D	LVR-IC	LDO, 13.7V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T138	-	R1191H138D	LVR-IC	LDO, 13.8V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T139	-	R1191H139D	LVR-IC	LDO, 13.9V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T140	-	R1191H140D	LVR-IC	LDO, 14.0V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T141	-	R1191H141D	LVR-IC	LDO, 14.1V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T142	-	R1191H142D	LVR-IC	LDO, 14.2V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T143	-	R1191H143D	LVR-IC	LDO, 14.3V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T144	-	R1191H144D	LVR-IC	LDO, 14.4V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T145	-	R1191H145D	LVR-IC	LDO, 14.5V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T146	-	R1191H146D	LVR-IC	LDO, 14.6V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T147	-	R1191H147D	LVR-IC	LDO, 14.7V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T148	-	R1191H148D	LVR-IC	LDO, 14.8V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T149	-	R1191H149D	LVR-IC	LDO, 14.9V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T150	-	R1191H150D	LVR-IC	LDO, 15.0V±1.5%, 300mA, +CE, ECO, CL	SOT-89-5	32c8	VR10	6h	Ric
T15A	-	FC6209A152P	LVR-IC	LDO, 1.5V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T15A	-	ML6209A152P	LVR-IC	LDO, 1.5V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T15B	-	FC6209B152P	LVR-IC	LDO, 1.5V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T15B	-	ML6209B152P	LVR-IC	LDO, 1.5V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T15C	-	FC6209C152P	LVR-IC	LDO, 1.5V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T15C	-	ML6209C152P	LVR-IC	LDO, 1.5V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T15D	-	FC6209D152P	LVR-IC	LDO, 1.5V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T15D	-	ML6209D152P	LVR-IC	LDO, 1.5V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T16A	-	FC6209A162P	LVR-IC	LDO, 1.6V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T16A	-	ML6209A162P	LVR-IC	LDO, 1.6V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T16B	-	FC6209B162P	LVR-IC	LDO, 1.6V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T16B	-	ML6209B162P	LVR-IC	LDO, 1.6V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T16C	-	FC6209C162P	LVR-IC	LDO, 1.6V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T16C	-	ML6209C162P	LVR-IC	LDO, 1.6V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T16D	-	FC6209D162P	LVR-IC	LDO, 1.6V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T16D	-	ML6209D162P	LVR-IC	LDO, 1.6V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T17A	-	FC6209A172P	LVR-IC	LDO, 1.7V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T17A	-	ML6209A172P	LVR-IC	LDO, 1.7V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T17B	-	FC6209B172P	LVR-IC	LDO, 1.7V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T17B	-	ML6209B172P	LVR-IC	LDO, 1.7V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T17C	-	FC6209C172P	LVR-IC	LDO, 1.7V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T17C	-	ML6209C172P	LVR-IC	LDO, 1.7V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T17D	-	FC6209D172P	LVR-IC	LDO, 1.7V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T17D	-	ML6209D172P	LVR-IC	LDO, 1.7V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T19A	-	FC6209A182P	LVR-IC	LDO, 1.8V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T19A	-	ML6209A182P	LVR-IC	LDO, 1.8V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T19B	-	FC6209B182P	LVR-IC	LDO, 1.8V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T19B	-	ML6209B182P	LVR-IC	LDO, 1.8V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T19C	-	FC6209C182P	LVR-IC	LDO, 1.8V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T19C	-	ML6209C182P	LVR-IC	LDO, 1.8V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T19D	-	FC6209D182P	LVR-IC	LDO, 1.8V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T19D	-	ML6209D182P	LVR-IC	LDO, 1.8V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T1FA	-	FC6209A15AP	LVR-IC	LDO, 1.55V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T1FA	-	ML6209A15AP	LVR-IC	LDO, 1.55V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T1FB	-	FC6209B15AP	LVR-IC	LDO, 1.55V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T1FB	-	ML6209B15AP	LVR-IC	LDO, 1.55V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T1FC	-	FC6209C15AP	LVR-IC	LDO, 1.55V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T1FC	-	ML6209C15AP	LVR-IC	LDO, 1.55V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T1FD	-	FC6209D15AP	LVR-IC	LDO, 1.55V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T1FD	-	ML6209D15AP	LVR-IC	LDO, 1.55V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T1GA	-	FC6209A16AP	LVR-IC	LDO, 1.65V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T1GA	-	ML6209A16AP	LVR-IC	LDO, 1.65V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T1GB	-	FC6209B16AP	LVR-IC	LDO, 1.65V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T1GB	-	ML6209B16AP	LVR-IC	LDO, 1.65V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T1GC	-	FC6209C16AP	LVR-IC	LDO, 1.65V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T1GC	-	ML6209C16AP	LVR-IC	LDO, 1.65V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T1GD	-	FC6209D16AP	LVR-IC	LDO, 1.65V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T1GD	-	ML6209D16AP	LVR-IC	LDO, 1.65V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T1HA	-	FC6209A17AP	LVR-IC	LDO, 1.75V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T1HA	-	ML6209A17AP	LVR-IC	LDO, 1.75V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T1HB	-	FC6209B17AP	LVR-IC	LDO, 1.75V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T1HB	-	ML6209B17AP	LVR-IC	LDO, 1.75V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T1HC	-	FC6209C17AP	LVR-IC	LDO, 1.75V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T1HC	-	ML6209C17AP	LVR-IC	LDO, 1.75V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T1HD	-	FC6209D17AP	LVR-IC	LDO, 1.75V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T1HD	-	ML6209D17AP	LVR-IC	LDO, 1.75V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T1IA	-	FC6209A18AP	LVR-IC	LDO, 1.85V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T1IA	-	ML6209A18AP	LVR-IC	LDO, 1.85V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T1IB	-	FC6209B18AP	LVR-IC	LDO, 1.85V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T1IB	-	ML6209B18AP	LVR-IC	LDO, 1.85V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T1IC	-	FC6209C18AP	LVR-IC	LDO, 1.85V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T1IC	-	ML6209C18AP	LVR-IC	LDO, 1.85V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T1ID	-	FC6209D18AP	LVR-IC	LDO, 1.85V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T1ID	-	ML6209D18AP	LVR-IC	LDO, 1.85V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T1JA	-	FC6209A19AP	LVR-IC	LDO, 1.95V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T1JA	-	ML6209A19AP	LVR-IC	LDO, 1.95V±3%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T1JB	-	FC6209B19AP	LVR-IC	LDO, 1.95V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T1JB	-	ML6209B19AP	LVR-IC	LDO, 1.95V±3%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T1JC	-	FC6209C19AP	LVR-IC	LDO, 1.95V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T1JC	-	ML6209C19AP	LVR-IC	LDO, 1.95V±3%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T1JD	-	FC6209D19AP	LVR-IC	LDO, 1.95V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T1JD	-	ML6209D19AP	LVR-IC	LDO, 1.95V±3%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T20	kb	XC6383D201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T20A	-	FC6209A202P	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T20A	-	ML6209A202P	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T20B	-	FC6209B202P	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T20B	-	ML6209B202P	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T20C	-	FC6209C202P	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T20C	-	ML6209C202P	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T20D	-	FC6209D202P	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T20D	-	ML6209D202P	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T21	kb	XC6383D211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T21A	-	FC6209A212P	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T21A	-	ML6209A212P	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T21B	-	FC6209B212P	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T21B	-	ML6209B212P	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T21C	-	FC6209C212P	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T21C	-	ML6209C212P	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T21D	-	FC6209D212P	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T21D	-	ML6209D212P	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T22	kb	XC6383D221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T22A	-	FC6209A222P	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T22A	-	ML6209A222P	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T22B	-	FC6209B222P	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T22B	-	ML6209B222P	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T22C	-	FC6209C222P	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T22C	-	ML6209C222P	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T22D	-	FC6209D222P	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T22D	-	ML6209D222P	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T23	kb	XC6383D231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T23A	-	FC6209A232P	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T23A	-	ML6209A232P	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T23B	-	FC6209B232P	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T23B	-	ML6209B232P	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T23C	-	FC6209C232P	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T23C	-	ML6209C232P	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T23D	-	FC6209D232P	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T23D	-	ML6209D232P	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T24	kb	XC6383D241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T24A	-	FC6209A242P	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T24A	-	ML6209A242P	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T24B	-	FC6209B242P	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T24B	-	ML6209B242P	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T24C	-	FC6209C242P	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T24C	-	ML6209C242P	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T24D	-	FC6209D242P	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T24D	-	ML6209D242P	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T25	kb	XC6383D251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T25A	-	FC6209A252P	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T25A	-	ML6209A252P	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T25B	-	FC6209B252P	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T25B	-	ML6209B252P	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T25C	-	FC6209C252P	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T25C	-	ML6209C252P	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T25D	-	FC6209D252P	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T25D	-	ML6209D252P	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T26	kb	XC6383D261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T26A	-	FC6209A262P	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T26A	-	ML6209A262P	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T26B	-	FC6209B262P	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T26B	-	ML6209B262P	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T26C	-	FC6209C262P	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T26C	-	ML6209C262P	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T26D	-	FC6209D262P	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T26D	-	ML6209D262P	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T27	kb	XC6383D271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T27A	-	FC6209A272P	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T27A	-	ML6209A272P	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T27B	-	FC6209B272P	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T27B	-	ML6209B272P	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T27C	-	FC6209C272P	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T27C	-	ML6209C272P	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T27D	-	FC6209D272P	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T27D	-	ML6209D272P	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T28	kb	XC6383D281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T28A	-	FC6209A282P	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T28A	-	ML6209A282P	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T28B	-	FC6209B282P	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T28B	-	ML6209B282P	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T28C	-	FC6209C282P	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T28C	-	ML6209C282P	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T28D	-	FC6209D282P	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T28D	-	ML6209D282P	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T29	kb	XC6383D291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T29A	-	FC6209A292P	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T29A	-	ML6209A292P	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T29B	-	FC6209B292P	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T29B	-	ML6209B292P	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T29C	-	FC6209C292P	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T29C	-	ML6209C292P	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T29D	-	FC6209D292P	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T29D	-	ML6209D292P	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T2AA	-	FC6209A20AP	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T2AA	-	ML6209A20AP	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T2AB	-	FC6209B20AP	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T2AB	-	ML6209B20AP	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T2AC	-	FC6209C20AP	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T2AC	-	ML6209C20AP	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T2AD	-	FC6209D20AP	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T2AD	-	ML6209D20AP	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T2BA	-	FC6209A21AP	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T2BA	-	ML6209A21AP	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T2BB	-	FC6209B21AP	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T2BB	-	ML6209B21AP	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T2BC	-	FC6209C21AP	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T2BC	-	ML6209C21AP	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T2BD	-	FC6209D21AP	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T2BD	-	ML6209D21AP	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T2CA	-	FC6209A22AP	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T2CA	-	ML6209A22AP	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T2CB	-	FC6209B22AP	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T2CB	-	ML6209B22AP	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T2CC	-	FC6209C22AP	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T2CC	-	ML6209C22AP	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T2CD	-	FC6209D22AP	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T2CD	-	ML6209D22AP	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T2DA	-	FC6209A23AP	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T2DA	-	ML6209A23AP	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T2DB	-	FC6209B23AP	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T2DB	-	ML6209B23AP	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T2DC	-	FC6209C23AP	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T2DC	-	ML6209C23AP	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T2DD	-	FC6209D23AP	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T2DD	-	ML6209D23AP	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T2EA	-	FC6209A24AP	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T2EA	-	ML6209A24AP	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T2EB	-	FC6209B24AP	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T2EB	-	ML6209B24AP	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T2EC	-	FC6209C24AP	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T2EC	-	ML6209C24AP	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T2ED	-	FC6209D24AP	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T2ED	-	ML6209D24AP	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T2FA	-	FC6209A25AP	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T2FA	-	ML6209A25AP	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T2FB	-	FC6209B25AP	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T2FB	-	ML6209B25AP	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T2FC	-	FC6209C25AP	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T2FC	-	ML6209C25AP	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T2FD	-	FC6209D25AP	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T2FD	-	ML6209D25AP	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T2GA	-	FC6209A26AP	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T2GA	-	ML6209A26AP	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T2GB	-	FC6209B26AP	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T2GB	-	ML6209B26AP	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T2GC	-	FC6209C26AP	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T2GC	-	ML6209C26AP	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T2GD	-	FC6209D26AP	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T2GD	-	ML6209D26AP	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T2HA	-	FC6209A27AP	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T2HA	-	ML6209A27AP	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T2HB	-	FC6209B27AP	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T2HB	-	ML6209B27AP	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T2HC	-	FC6209C27AP	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T2HC	-	ML6209C27AP	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T2HD	-	FC6209D27AP	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T2HD	-	ML6209D27AP	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T2IA	-	FC6209A28AP	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T2IA	-	ML6209A28AP	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T2IB	-	FC6209B28AP	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T2IB	-	ML6209B28AP	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T2IC	-	FC6209C28AP	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T2IC	-	ML6209C28AP	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T2ID	-	FC6209D28AP	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T2ID	-	ML6209D28AP	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T2JA	-	FC6209A29AP	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T2JA	-	ML6209A29AP	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T2JB	-	FC6209B29AP	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T2JB	-	ML6209B29AP	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T2JC	-	FC6209C29AP	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T2JC	-	ML6209C29AP	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T2JD	-	FC6209D29AP	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T2JD	-	ML6209D29AP	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T30	kb	XC6383D301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T30A	-	FC6209A302P	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T30A	-	ML6209A302P	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T30B	-	FC6209B302P	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T30B	-	ML6209B302P	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T30C	-	FC6209C302P	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T30C	-	ML6209C302P	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T30D	-	FC6209D302P	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T30D	-	ML6209D302P	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T31	kb	XC6383D311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T31A	-	FC6209A312P	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T31A	-	ML6209A312P	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T31B	-	FC6209B312P	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T31B	-	ML6209B312P	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T31C	-	FC6209C312P	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T31C	-	ML6209C312P	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T31D	-	FC6209D312P	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T31D	-	ML6209D312P	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T32	kb	XC6383D321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T32A	-	FC6209A322P	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T32A	-	ML6209A322P	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T32B	-	FC6209B322P	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T32B	-	ML6209B322P	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T32C	-	FC6209C322P	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T32C	-	ML6209C322P	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T32D	-	FC6209D322P	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T32D	-	ML6209D322P	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T33	kb	XC6383D331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T33A	-	FC6209A332P	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T33A	-	ML6209A332P	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T33B	-	FC6209B332P	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T33B	-	ML6209B332P	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T33C	-	FC6209C332P	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T33C	-	ML6209C332P	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T33D	-	FC6209D332P	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T33D	-	ML6209D332P	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T34	kb	XC6383D341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T34A	-	FC6209A342P	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T34A	-	ML6209A342P	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T34B	-	FC6209B342P	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T34B	-	ML6209B342P	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T34C	-	FC6209C342P	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T34C	-	ML6209C342P	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T34D	-	FC6209D342P	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T34D	-	ML6209D342P	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T35	kb	XC6383D351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T35A	-	FC6209A352P	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T35A	-	ML6209A352P	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T35B	-	FC6209B352P	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T35B	-	ML6209B352P	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T35C	-	FC6209C352P	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T35C	-	ML6209C352P	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T35D	-	FC6209D352P	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T35D	-	ML6209D352P	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T36	kb	XC6383D361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T36A	-	FC6209A362P	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T36A	-	ML6209A362P	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T36B	-	FC6209B362P	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T36B	-	ML6209B362P	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T36C	-	FC6209C362P	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T36C	-	ML6209C362P	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T36D	-	FC6209D362P	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T36D	-	ML6209D362P	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T37	kb	XC6383D371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T37A	-	FC6209A372P	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T37A	-	ML6209A372P	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T37B	-	FC6209B372P	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T37B	-	ML6209B372P	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T37C	-	FC6209C372P	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T37C	-	ML6209C372P	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T37D	-	FC6209D372P	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T37D	-	ML6209D372P	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T38	kb	XC6383D381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T38A	-	FC6209A382P	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T38A	-	ML6209A382P	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T38B	-	FC6209B382P	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T38B	-	ML6209B382P	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T38C	-	FC6209C382P	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T38C	-	ML6209C382P	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T38D	-	FC6209D382P	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T38D	-	ML6209D382P	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T39	kb	XC6383D391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T39A	-	FC6209A392P	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T39A	-	ML6209A392P	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T39B	-	FC6209B392P	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T39B	-	ML6209B392P	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T39C	-	FC6209C392P	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T39C	-	ML6209C392P	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T39D	-	FC6209D392P	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T39D	-	ML6209D392P	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T3AA	-	FC6209A30AP	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T3AA	-	ML6209A30AP	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T3AB	-	FC6209B30AP	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T3AB	-	ML6209B30AP	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T3AC	-	FC6209C30AP	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T3AC	-	ML6209C30AP	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T3AD	-	FC6209D30AP	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T3AD	-	ML6209D30AP	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T3BA	-	FC6209A31AP	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T3BA	-	ML6209A31AP	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T3BB	-	FC6209B31AP	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T3BB	-	ML6209B31AP	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T3BC	-	FC6209C31AP	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T3BC	-	ML6209C31AP	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T3BD	-	FC6209D31AP	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T3BD	-	ML6209D31AP	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T3CA	-	FC6209A32AP	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T3CA	-	ML6209A32AP	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T3CB	-	FC6209B32AP	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T3CB	-	ML6209B32AP	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T3CC	-	FC6209C32AP	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T3CC	-	ML6209C32AP	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T3CD	-	FC6209D32AP	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T3CD	-	ML6209D32AP	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T3DA	-	FC6209A33AP	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T3DA	-	ML6209A33AP	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T3DB	-	FC6209B33AP	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T3DB	-	ML6209B33AP	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T3DC	-	FC6209C33AP	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T3DC	-	ML6209C33AP	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T3DD	-	FC6209D33AP	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T3DD	-	ML6209D33AP	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T3EA	-	FC6209A34AP	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T3EA	-	ML6209A34AP	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T3EB	-	FC6209B34AP	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T3EB	-	ML6209B34AP	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T3EC	-	FC6209C34AP	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T3EC	-	ML6209C34AP	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T3ED	-	FC6209D34AP	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T3ED	-	ML6209D34AP	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T3FA	-	FC6209A35AP	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T3FA	-	ML6209A35AP	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T3FB	-	FC6209B35AP	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T3FB	-	ML6209B35AP	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T3FC	-	FC6209C35AP	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T3FC	-	ML6209C35AP	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T3FD	-	FC6209D35AP	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T3FD	-	ML6209D35AP	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T3GA	-	FC6209A36AP	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T3GA	-	ML6209A36AP	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T3GB	-	FC6209B36AP	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T3GB	-	ML6209B36AP	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T3GC	-	FC6209C36AP	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T3GC	-	ML6209C36AP	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T3GD	-	FC6209D36AP	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T3GD	-	ML6209D36AP	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T3HA	-	FC6209A37AP	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T3HA	-	ML6209A37AP	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T3HB	-	FC6209B37AP	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T3HB	-	ML6209B37AP	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T3HC	-	FC6209C37AP	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T3HC	-	ML6209C37AP	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T3HD	-	FC6209D37AP	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T3HD	-	ML6209D37AP	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T3IA	-	FC6209A38AP	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T3IA	-	ML6209A38AP	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T3IB	-	FC6209B38AP	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T3IB	-	ML6209B38AP	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T3IC	-	FC6209C38AP	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T3IC	-	ML6209C38AP	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T3ID	-	FC6209D38AP	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T3ID	-	ML6209D38AP	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T3JA	-	FC6209A39AP	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T3JA	-	ML6209A39AP	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T3JB	-	FC6209B39AP	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T3JB	-	ML6209B39AP	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T3JC	-	FC6209C39AP	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T3JC	-	ML6209C39AP	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T3JD	-	FC6209D39AP	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T3JD	-	ML6209D39AP	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T40	kb	XC6383D401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T40A	-	FC6209A402P	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T40A	-	ML6209A402P	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T40B	-	FC6209B402P	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T40B	-	ML6209B402P	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T40C	-	FC6209C402P	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T40C	-	ML6209C402P	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T40D	-	FC6209D402P	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T40D	-	ML6209D402P	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T41	kb	XC6383D411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T41A	-	FC6209A412P	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T41A	-	ML6209A412P	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T41B	-	FC6209B412P	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T41B	-	ML6209B412P	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T41C	-	FC6209C412P	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T41C	-	ML6209C412P	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T41D	-	FC6209D412P	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T41D	-	ML6209D412P	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T42	kb	XC6383D421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T42A	-	FC6209A422P	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T42A	-	ML6209A422P	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T42B	-	FC6209B422P	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T42B	-	ML6209B422P	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T42C	-	FC6209C422P	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T42C	-	ML6209C422P	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T42D	-	FC6209D422P	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T42D	-	ML6209D422P	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T43	kb	XC6383D431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T43A	-	FC6209A432P	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T43A	-	ML6209A432P	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T43B	-	FC6209B432P	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T43B	-	ML6209B432P	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T43C	-	FC6209C432P	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T43C	-	ML6209C432P	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T43D	-	FC6209D432P	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T43D	-	ML6209D432P	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T44	kb	XC6383D441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T44A	-	FC6209A442P	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T44A	-	ML6209A442P	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T44B	-	FC6209B442P	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T44B	-	ML6209B442P	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T44C	-	FC6209C442P	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T44C	-	ML6209C442P	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T44D	-	FC6209D442P	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T44D	-	ML6209D442P	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T45	kb	XC6383D451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T45A	-	FC6209A452P	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T45A	-	ML6209A452P	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T45B	-	FC6209B452P	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T45B	-	ML6209B452P	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T45C	-	FC6209C452P	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T45C	-	ML6209C452P	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T45D	-	FC6209D452P	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T45D	-	ML6209D452P	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T46	kb	XC6383D461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T46A	-	FC6209A462P	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T46A	-	ML6209A462P	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T46B	-	FC6209B462P	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T46B	-	ML6209B462P	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T46C	-	FC6209C462P	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T46C	-	ML6209C462P	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T46D	-	FC6209D462P	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T46D	-	ML6209D462P	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T47	kb	XC6383D471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T47A	-	FC6209A472P	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T47A	-	ML6209A472P	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T47B	-	FC6209B472P	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T47B	-	ML6209B472P	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T47C	-	FC6209C472P	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T47C	-	ML6209C472P	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T47D	-	FC6209D472P	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T47D	-	ML6209D472P	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T48	kb	XC6383D481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T48A	-	FC6209A482P	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T48A	-	ML6209A482P	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T48B	-	FC6209B482P	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T48B	-	ML6209B482P	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T48C	-	FC6209C482P	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T48C	-	ML6209C482P	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T48D	-	FC6209D482P	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T48D	-	ML6209D482P	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T49	kb	XC6383D491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T49A	-	FC6209A492P	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T49A	-	ML6209A492P	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T49B	-	FC6209B492P	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T49B	-	ML6209B492P	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T49C	-	FC6209C492P	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T49C	-	ML6209C492P	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T49D	-	FC6209D492P	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T49D	-	ML6209D492P	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T4AA	-	FC6209A40AP	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T4AA	-	ML6209A40AP	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T4AB	-	FC6209B40AP	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T4AB	-	ML6209B40AP	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T4AC	-	FC6209C40AP	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T4AC	-	ML6209C40AP	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T4AD	-	FC6209D40AP	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T4AD	-	ML6209D40AP	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T4BA	-	FC6209A41AP	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T4BA	-	ML6209A41AP	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T4BB	-	FC6209B41AP	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T4BB	-	ML6209B41AP	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T4BC	-	FC6209C41AP	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T4BC	-	ML6209C41AP	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T4BD	-	FC6209D41AP	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T4BD	-	ML6209D41AP	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T4CA	-	FC6209A42AP	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T4CA	-	ML6209A42AP	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T4CB	-	FC6209B42AP	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T4CB	-	ML6209B42AP	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T4CC	-	FC6209C42AP	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T4CC	-	ML6209C42AP	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T4CD	-	FC6209D42AP	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T4CD	-	ML6209D42AP	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T4DA	-	FC6209A43AP	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T4DA	-	ML6209A43AP	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T4DB	-	FC6209B43AP	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T4DB	-	ML6209B43AP	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T4DC	-	FC6209C43AP	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T4DC	-	ML6209C43AP	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T4DD	-	FC6209D43AP	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T4DD	-	ML6209D43AP	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T4EA	-	FC6209A44AP	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T4EA	-	ML6209A44AP	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T4EB	-	FC6209B44AP	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T4EB	-	ML6209B44AP	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T4EC	-	FC6209C44AP	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T4EC	-	ML6209C44AP	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T4ED	-	FC6209D44AP	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T4ED	-	ML6209D44AP	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T4FA	-	FC6209A45AP	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T4FA	-	ML6209A45AP	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T4FB	-	FC6209B45AP	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T4FB	-	ML6209B45AP	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T4FC	-	FC6209C45AP	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T4FC	-	ML6209C45AP	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T4FD	-	FC6209D45AP	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T4FD	-	ML6209D45AP	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T4GA	-	FC6209A46AP	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T4GA	-	ML6209A46AP	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T4GB	-	FC6209B46AP	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T4GB	-	ML6209B46AP	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T4GC	-	FC6209C46AP	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T4GC	-	ML6209C46AP	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T4GD	-	FC6209D46AP	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T4GD	-	ML6209D46AP	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T4HA	-	FC6209A47AP	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T4HA	-	ML6209A47AP	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T4HB	-	FC6209B47AP	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T4HB	-	ML6209B47AP	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T4HC	-	FC6209C47AP	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T4HC	-	ML6209C47AP	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T4HD	-	FC6209D47AP	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T4HD	-	ML6209D47AP	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T4IA	-	FC6209A48AP	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T4IA	-	ML6209A48AP	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T4IB	-	FC6209B48AP	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T4IB	-	ML6209B48AP	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T4IC	-	FC6209C48AP	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T4IC	-	ML6209C48AP	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T4ID	-	FC6209D48AP	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T4ID	-	ML6209D48AP	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T4JA	-	FC6209A49AP	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T4JA	-	ML6209A49AP	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T4JB	-	FC6209B49AP	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T4JB	-	ML6209B49AP	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T4JC	-	FC6209C49AP	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T4JC	-	ML6209C49AP	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T4JD	-	FC6209D49AP	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T4JD	-	ML6209D49AP	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T50	kb	XC6383D501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T50A	-	FC6209A502P	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T50A	-	ML6209A502P	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T50B	-	FC6209B502P	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T50B	-	ML6209B502P	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T50C	-	FC6209C502P	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T50C	-	ML6209C502P	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T50D	-	FC6209D502P	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T50D	-	ML6209D502P	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T51	kb	XC6383D511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T51A	-	FC6209A512P	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T51A	-	ML6209A512P	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T51B	-	FC6209B512P	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T51B	-	ML6209B512P	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T51C	-	FC6209C512P	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T51C	-	ML6209C512P	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T51D	-	FC6209D512P	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T51D	-	ML6209D512P	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T52	kb	XC6383D521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T52A	-	FC6209A522P	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T52A	-	ML6209A522P	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T52B	-	FC6209B522P	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T52B	-	ML6209B522P	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T52C	-	FC6209C522P	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T52C	-	ML6209C522P	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T52D	-	FC6209D522P	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T52D	-	ML6209D522P	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T53	kb	XC6383D531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T53A	-	FC6209A532P	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T53A	-	ML6209A532P	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T53B	-	FC6209B532P	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T53B	-	ML6209B532P	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T53C	-	FC6209C532P	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T53C	-	ML6209C532P	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T53D	-	FC6209D532P	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T53D	-	ML6209D532P	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T54	kb	XC6383D541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T54A	-	FC6209A542P	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T54A	-	ML6209A542P	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T54B	-	FC6209B542P	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T54B	-	ML6209B542P	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T54C	-	FC6209C542P	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T54C	-	ML6209C542P	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T54D	-	FC6209D542P	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T54D	-	ML6209D542P	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T55	kb	XC6383D551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T55A	-	FC6209A552P	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T55A	-	ML6209A552P	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T55B	-	FC6209B552P	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T55B	-	ML6209B552P	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T55C	-	FC6209C552P	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T55C	-	ML6209C552P	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T55D	-	FC6209D552P	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T55D	-	ML6209D552P	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T56	kb	XC6383D561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T56A	-	FC6209A562P	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T56A	-	ML6209A562P	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T56B	-	FC6209B562P	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T56B	-	ML6209B562P	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T56C	-	FC6209C562P	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T56C	-	ML6209C562P	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T56D	-	FC6209D562P	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T56D	-	ML6209D562P	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T57	kb	XC6383D571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T57A	-	FC6209A572P	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T57A	-	ML6209A572P	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T57B	-	FC6209B572P	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T57B	-	ML6209B572P	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T57C	-	FC6209C572P	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T57C	-	ML6209C572P	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T57D	-	FC6209D572P	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T57D	-	ML6209D572P	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T58	kb	XC6383D581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T58A	-	FC6209A582P	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T58A	-	ML6209A582P	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T58B	-	FC6209B582P	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T58B	-	ML6209B582P	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T58C	-	FC6209C582P	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T58C	-	ML6209C582P	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T58D	-	FC6209D582P	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T58D	-	ML6209D582P	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T59	kb	XC6383D591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T59A	-	FC6209A592P	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T59A	-	ML6209A592P	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T59B	-	FC6209B592P	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T59B	-	ML6209B592P	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T59C	-	FC6209C592P	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T59C	-	ML6209C592P	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T59D	-	FC6209D592P	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T59D	-	ML6209D592P	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T5AA	-	FC6209A50AP	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T5AA	-	ML6209A50AP	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T5AB	-	FC6209B50AP	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T5AB	-	ML6209B50AP	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T5AC	-	FC6209C50AP	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T5AC	-	ML6209C50AP	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T5AD	-	FC6209D50AP	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T5AD	-	ML6209D50AP	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T5BA	-	FC6209A51AP	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T5BA	-	ML6209A51AP	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T5BB	-	FC6209B51AP	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T5BB	-	ML6209B51AP	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T5BC	-	FC6209C51AP	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T5BC	-	ML6209C51AP	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T5BD	-	FC6209D51AP	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T5BD	-	ML6209D51AP	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T5CA	-	FC6209A52AP	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T5CA	-	ML6209A52AP	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T5CB	-	FC6209B52AP	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T5CB	-	ML6209B52AP	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T5CC	-	FC6209C52AP	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T5CC	-	ML6209C52AP	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T5CD	-	FC6209D52AP	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T5CD	-	ML6209D52AP	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T5DA	-	FC6209A53AP	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T5DA	-	ML6209A53AP	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T5DB	-	FC6209B53AP	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T5DB	-	ML6209B53AP	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T5DC	-	FC6209C53AP	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T5DC	-	ML6209C53AP	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T5DD	-	FC6209D53AP	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T5DD	-	ML6209D53AP	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T5EA	-	FC6209A54AP	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T5EA	-	ML6209A54AP	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T5EB	-	FC6209B54AP	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T5EB	-	ML6209B54AP	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T5EC	-	FC6209C54AP	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T5EC	-	ML6209C54AP	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T5ED	-	FC6209D54AP	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T5ED	-	ML6209D54AP	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T5FA	-	FC6209A55AP	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T5FA	-	ML6209A55AP	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T5FB	-	FC6209B55AP	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T5FB	-	ML6209B55AP	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T5FC	-	FC6209C55AP	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T5FC	-	ML6209C55AP	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T5FD	-	FC6209D55AP	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T5FD	-	ML6209D55AP	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T5GA	-	FC6209A56AP	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T5GA	-	ML6209A56AP	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T5GB	-	FC6209B56AP	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T5GB	-	ML6209B56AP	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T5GC	-	FC6209C56AP	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T5GC	-	ML6209C56AP	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T5GD	-	FC6209D56AP	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T5GD	-	ML6209D56AP	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T5HA	-	FC6209A57AP	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T5HA	-	ML6209A57AP	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T5HB	-	FC6209B57AP	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T5HB	-	ML6209B57AP	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T5HC	-	FC6209C57AP	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T5HC	-	ML6209C57AP	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T5HD	-	FC6209D57AP	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T5HD	-	ML6209D57AP	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T5IA	-	FC6209A58AP	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T5IA	-	ML6209A58AP	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T5IB	-	FC6209B58AP	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T5IB	-	ML6209B58AP	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T5IC	-	FC6209C58AP	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T5IC	-	ML6209C58AP	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T5ID	-	FC6209D58AP	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T5ID	-	ML6209D58AP	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T5JA	-	FC6209A59AP	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T5JA	-	ML6209A59AP	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T5JB	-	FC6209B59AP	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T5JB	-	ML6209B59AP	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T5JC	-	FC6209C59AP	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T5JC	-	ML6209C59AP	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T5JD	-	FC6209D59AP	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T5JD	-	ML6209D59AP	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T60	kb	XC6383D601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T60A	-	FC6209A602P	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Fis
T60A	-	ML6209A602P	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6j	Mlc
T60B	-	FC6209B602P	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Fis
T60B	-	ML6209B602P	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6j	Mlc
T60C	-	FC6209C602P	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Fis
T60C	-	ML6209C602P	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6j	Mlc
T60D	-	FC6209D602P	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Fis
T60D	-	ML6209D602P	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6j	Mlc
T61	kb	XC6383D611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T62	kb	XC6383D621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T63	kb	XC6383D631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T64	kb	XC6383D641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T65	kb	XC6383D651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T66	kb	XC6383D661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T67	kb	XC6383D671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T68	kb	XC6383D681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T69	kb	XC6383D691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
T70	kb	XC6383D701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, ext.trans.	SOT-89-5	32c3	DC6	6u	Tor
TF	-	ELM99153B	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
TG	-	ELM99163B	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
TH	-	ELM99173B	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
TJ	-	ELM99183B	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
TK	-	ELM99193B	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SOT-89-5	32vrt	VR1	6n	Elm
U01B	-	RP131H121B5	LVR-IC	LDO, 1.25V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U01D	-	RP131H121D5	LVR-IC	LDO, 1.25V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U02B	-	RP131H181B5	LVR-IC	LDO, 1.85V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U02D	-	RP131H181D5	LVR-IC	LDO, 1.85V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U03B	-	RP131H281B5	LVR-IC	LDO, 2.85V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U03D	-	RP131H281D5	LVR-IC	LDO, 2.85V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U04B	-	RP131H101B5	LVR-IC	LDO, 1.05V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U04D	-	RP131H101D5	LVR-IC	LDO, 1.05V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U08B	-	RP131H081B	LVR-IC	LDO, 0.8V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U08D	-	RP131H081D	LVR-IC	LDO, 0.8V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U09B	-	RP131H091B	LVR-IC	LDO, 0.9V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U09D	-	RP131H091D	LVR-IC	LDO, 0.9V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U10B	-	RP131H101B	LVR-IC	LDO, 1.0V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U10D	-	RP131H101D	LVR-IC	LDO, 1.0V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U11B	-	RP131H111B	LVR-IC	LDO, 1.1V±1%, 1A	SOT-89-5	32xa	VR4	6h	Ric
U11D	-	RP131H111D	LVR-IC	LDO, 1.1V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U12B	-	RP131H121B	LVR-IC	LDO, 1.2V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U12D	-	RP131H121D	LVR-IC	LDO, 1.2V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U13B	-	RP131H131B	LVR-IC	LDO, 1.3V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U13D	-	RP131H131D	LVR-IC	LDO, 1.3V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U14B	-	RP131H141B	LVR-IC	LDO, 1.4V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U14D	-	RP131H141D	LVR-IC	LDO, 1.4V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U15B	-	RP131H151B	LVR-IC	LDO, 1.5V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U15D	-	RP131H151D	LVR-IC	LDO, 1.5V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U16B	-	RP131H161B	LVR-IC	LDO, 1.6V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U16D	-	RP131H161D	LVR-IC	LDO, 1.6V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U17B	-	RP131H171B	LVR-IC	LDO, 1.7V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U17D	-	RP131H171D	LVR-IC	LDO, 1.7V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U18B	-	RP131H181B	LVR-IC	LDO, 1.8V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U18D	-	RP131H181D	LVR-IC	LDO, 1.8V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U19B	-	RP131H191B	LVR-IC	LDO, 1.9V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U19D	-	RP131H191D	LVR-IC	LDO, 1.9V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U20	kb	XC6383E201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U20B	-	RP131H201B	LVR-IC	LDO, 2.0V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U20D	-	RP131H201D	LVR-IC	LDO, 2.0V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U21	kb	XC6383E211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U21B	-	RP131H211B	LVR-IC	LDO, 2.1V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U21D	-	RP131H211D	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U22	kb	XC6383E221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U22B	-	RP131H221B	LVR-IC	LDO, 2.2V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U22D	-	RP131H221D	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U23	kb	XC6383E231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U23B	-	RP131H231B	LVR-IC	LDO, 2.3V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U23D	-	RP131H231D	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U24	kb	XC6383E241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U24B	-	RP131H241B	LVR-IC	LDO, 2.4V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U24D	-	RP131H241D	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U25	kb	XC6383E251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U25B	-	RP131H251B	LVR-IC	LDO, 2.5V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U25D	-	RP131H251D	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U26	kb	XC6383E261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U26B	-	RP131H261B	LVR-IC	LDO, 2.6V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U26D	-	RP131H261D	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U27	kb	XC6383E271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U27B	-	RP131H271B	LVR-IC	LDO, 2.7V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U27D	-	RP131H271D	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U28	kb	XC6383E281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U28B	-	RP131H281B	LVR-IC	LDO, 2.8V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U28D	-	RP131H281D	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U29	kb	XC6383E291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U29B	-	RP131H291B	LVR-IC	LDO, 2.9V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U29D	-	RP131H291D	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U30	kb	XC6383E301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U30B	-	RP131H301B	LVR-IC	LDO, 3.0V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U30D	-	RP131H301D	LVR-IC	LDO, 3.V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U31	kb	XC6383E311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U31B	-	RP131H311B	LVR-IC	LDO, 3.1V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U31D	-	RP131H311D	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U32	kb	XC6383E321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U32B	-	RP131H321B	LVR-IC	LDO, 3.2V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U32D	-	RP131H321D	LVR-IC	LDO, 3.2V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U33	kb	XC6383E331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U33B	-	RP131H331B	LVR-IC	LDO, 3.3V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U33D	-	RP131H331D	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U34	kb	XC6383E341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U34B	-	RP131H341B	LVR-IC	LDO, 3.4V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U34D	-	RP131H341D	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U35	kb	XC6383E351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U35B	-	RP131H351B	LVR-IC	LDO, 3.5V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U35D	-	RP131H351D	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U36	kb	XC6383E361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U36B	-	RP131H361B	LVR-IC	LDO, 3.6V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U36D	-	RP131H361D	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U37	kb	XC6383E371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U37B	-	RP131H371B	LVR-IC	LDO, 3.7V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U37D	-	RP131H371D	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U38	kb	XC6383E381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U38B	-	RP131H381B	LVR-IC	LDO, 3.8V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U38D	-	RP131H381D	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U39	kb	XC6383E391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U39B	-	RP131H391B	LVR-IC	LDO, 3.9V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U39D	-	RP131H391D	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U40	kb	XC6383E401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U40B	-	RP131H401B	LVR-IC	LDO, 4.0V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U40D	-	RP131H401D	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U41	kb	XC6383E411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U41B	-	RP131H411B	LVR-IC	LDO, 4.1V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U41D	-	RP131H411D	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U42	kb	XC6383E421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U42B	-	RP131H421B	LVR-IC	LDO, 4.2V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U42D	-	RP131H421D	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U43	kb	XC6383E431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U43B	-	RP131H431B	LVR-IC	LDO, 4.3V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U43D	-	RP131H431D	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U44	kb	XC6383E441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U44B	-	RP131H441B	LVR-IC	LDO, 4.4V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U44D	-	RP131H441D	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U45	kb	XC6383E451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U45B	-	RP131H451B	LVR-IC	LDO, 4.5V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U45D	-	RP131H451D	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U46	kb	XC6383E461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U46B	-	RP131H461B	LVR-IC	LDO, 4.6V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U46D	-	RP131H461D	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U47	kb	XC6383E471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U47B	-	RP131H471B	LVR-IC	LDO, 4.7V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U47D	-	RP131H471D	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U48	kb	XC6383E481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U48B	-	RP131H481B	LVR-IC	LDO, 4.8V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U48D	-	RP131H481D	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U49	kb	XC6383E491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U49B	-	RP131H491B	LVR-IC	LDO, 4.9V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U49D	-	RP131H491D	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U50	kb	XC6383E501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U50B	-	RP131H501B	LVR-IC	LDO, 5.0V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U50D	-	RP131H501D	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U51	kb	XC6383E511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U51B	-	RP131H511B	LVR-IC	LDO, 5.1V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U51D	-	RP131H511D	LVR-IC	LDO, 5.1V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U52	kb	XC6383E521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U52B	-	RP131H521B	LVR-IC	LDO, 5.2V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U52D	-	RP131H521D	LVR-IC	LDO, 5.2V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U53	kb	XC6383E531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U53B	-	RP131H531B	LVR-IC	LDO, 5.3V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U53D	-	RP131H531D	LVR-IC	LDO, 5.3V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U54	kb	XC6383E541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U54B	-	RP131H541B	LVR-IC	LDO, 5.4V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U54D	-	RP131H541D	LVR-IC	LDO, 5.4V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U55	kb	XC6383E551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U55B	-	RP131H551B	LVR-IC	LDO, 5.5V±1%, 1A, +CE	SOT-89-5	32xa	VR4	6h	Ric
U55D	-	RP131H551D	LVR-IC	LDO, 5.5V±1%, 1A, +CE, CL	SOT-89-5	32xa	VR4	6h	Ric
U56	kb	XC6383E561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U57	kb	XC6383E571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U58	kb	XC6383E581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U59	kb	XC6383E591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U60	kb	XC6383E601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U61	kb	XC6383E611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U62	kb	XC6383E621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U63	kb	XC6383E631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U64	kb	XC6383E641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U65	kb	XC6383E651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U66	kb	XC6383E661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U67	kb	XC6383E671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U68	kb	XC6383E681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U69	kb	XC6383E691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
U70	kb	XC6383E701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
V20	kb	XC6383F201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V21	kb	XC6383F211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V22	kb	XC6383F221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V23	kb	XC6383F231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V24	kb	XC6383F241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V25	kb	XC6383F251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V26	kb	XC6383F261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V27	kb	XC6383F271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V28	kb	XC6383F281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V29	kb	XC6383F291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V30	kb	XC6383F301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V31	kb	XC6383F311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V32	kb	XC6383F321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V33	kb	XC6383F331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V34	kb	XC6383F341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V35	kb	XC6383F351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V36	kb	XC6383F361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V37	kb	XC6383F371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V38	kb	XC6383F381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V39	kb	XC6383F391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V40	kb	XC6383F401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V41	kb	XC6383F411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V42	kb	XC6383F421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V43	kb	XC6383F431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V44	kb	XC6383F441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V45	kb	XC6383F451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V46	kb	XC6383F461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V47	kb	XC6383F471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V48	kb	XC6383F481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V49	kb	XC6383F491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V50	kb	XC6383F501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V51	kb	XC6383F511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V52	kb	XC6383F521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V53	kb	XC6383F531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V54	kb	XC6383F541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V55	kb	XC6383F551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V56	kb	XC6383F561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V57	kb	XC6383F571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V58	kb	XC6383F581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V59	kb	XC6383F591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V60	kb	XC6383F601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V61	kb	XC6383F611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V62	kb	XC6383F621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V63	kb	XC6383F631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V64	kb	XC6383F641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V65	kb	XC6383F651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V66	kb	XC6383F661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V67	kb	XC6383F671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V68	kb	XC6383F681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V69	kb	XC6383F691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
V70	kb	XC6383F701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 100kHz, int. Vdd, ext.trans.	SOT-89-5	32c4	DC13	6u	Tor
VA2	-	S-1135C34-U5T1G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VA3	-	S-1135C35-U5T1G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAA	-	S-1135C10-U5T1G	LVR-IC	LDO, 1.0V±15mV, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAB	-	S-1135C11-U5T1G	LVR-IC	LDO, 1.1V±15mV, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAC	-	S-1135C12-U5T1G	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAD	-	S-1135C13-U5T1G	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAE	-	S-1135C14-U5T1G	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAF	-	S-1135C15-U5T1G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAG	-	S-1135C16-U5T1G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAH	-	S-1135C17-U5T1G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAI	-	S-1135C18-U5T1G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAJ	-	S-1135C1J-U5T1G	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAK	-	S-1135C19-U5T1G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAL	-	S-1135C20-U5T1G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAM	-	S-1135C21-U5T1G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAN	-	S-1135C22-U5T1G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAO	-	S-1135C23-U5T1G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAP	-	S-1135C24-U5T1G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAQ	-	S-1135C25-U5T1G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAR	-	S-1135C26-U5T1G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAS	-	S-1135C27-U5T1G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAT	-	S-1135C28-U5T1G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAU	-	S-1135C2J-U5T1G	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAV	-	S-1135C29-U5T1G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAW	-	S-1135C30-U5T1G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAX	-	S-1135C31-U5T1G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAY	-	S-1135C32-U5T1G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VAZ	-	S-1135C33-U5T1G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VB2	-	S-1135D34-U5T1G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VB3	-	S-1135D35-U5T1G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBA	-	S-1135D10-U5T1G	LVR-IC	LDO, 1.0V±15mV, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBB	-	S-1135D11-U5T1G	LVR-IC	LDO, 1.1V±15mV, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBC	-	S-1135D12-U5T1G	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBD	-	S-1135D13-U5T1G	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBE	-	S-1135D14-U5T1G	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBF	-	S-1135D15-U5T1G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBG	-	S-1135D16-U5T1G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBH	-	S-1135D17-U5T1G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBI	-	S-1135D18-U5T1G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBJ	-	S-1135D1J-U5T1G	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBK	-	S-1135D19-U5T1G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBL	-	S-1135D20-U5T1G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBM	-	S-1135D21-U5T1G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBN	-	S-1135D22-U5T1G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBO	-	S-1135D23-U5T1G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBP	-	S-1135D24-U5T1G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBQ	-	S-1135D25-U5T1G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBR	-	S-1135D26-U5T1G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBS	-	S-1135D27-U5T1G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBT	-	S-1135D28-U5T1G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBU	-	S-1135D2J-U5T1G	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBV	-	S-1135D29-U5T1G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBW	-	S-1135D30-U5T1G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBX	-	S-1135D31-U5T1G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBY	-	S-1135D32-U5T1G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VBZ	-	S-1135D33-U5T1G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE	SOT-89-5	32vr4	VR4	6n	Sii
VH2	-	S-1137A34-U5T1G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VH3	-	S-1137A35-U5T1G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHC	-	S-1137A12-U5T1G	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHD	-	S-1137A13-U5T1G	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VHE	-	S-1137A14-U5T1G	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHF	-	S-1137A15-U5T1G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHG	-	S-1137A16-U5T1G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHH	-	S-1137A17-U5T1G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHI	-	S-1137A18-U5T1G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHJ	-	S-1137A1J-U5T1G	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHK	-	S-1137A19-U5T1G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHL	-	S-1137A20-U5T1G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHM	-	S-1137A21-U5T1G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHN	-	S-1137A22-U5T1G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHO	-	S-1137A23-U5T1G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHP	-	S-1137A24-U5T1G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHQ	-	S-1137A25-U5T1G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHR	-	S-1137A26-U5T1G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHS	-	S-1137A27-U5T1G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHT	-	S-1137A28-U5T1G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHU	-	S-1137A2J-U5T1G	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHV	-	S-1137A29-U5T1G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHW	-	S-1137A30-U5T1G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHX	-	S-1137A31-U5T1G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHY	-	S-1137A32-U5T1G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VHZ	-	S-1137A33-U5T1G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, CL, PDR	SOT-89-5	32es	VR7	6n	Sii
VI2	-	S-1137B34-U5T1G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VI3	-	S-1137B35-U5T1G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIC	-	S-1137B12-U5T1G	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VID	-	S-1137B13-U5T1G	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIE	-	S-1137B14-U5T1G	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIF	-	S-1137B15-U5T1G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIG	-	S-1137B16-U5T1G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIH	-	S-1137B17-U5T1G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VII	-	S-1137B18-U5T1G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIJ	-	S-1137B1J-U5T1G	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIK	-	S-1137B19-U5T1G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIL	-	S-1137B20-U5T1G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIM	-	S-1137B21-U5T1G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIN	-	S-1137B22-U5T1G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIO	-	S-1137B23-U5T1G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIP	-	S-1137B24-U5T1G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIQ	-	S-1137B25-U5T1G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIR	-	S-1137B26-U5T1G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIS	-	S-1137B27-U5T1G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIT	-	S-1137B28-U5T1G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIU	-	S-1137B2J-U5T1G	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIV	-	S-1137B29-U5T1G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIW	-	S-1137B30-U5T1G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIX	-	S-1137B31-U5T1G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIY	-	S-1137B32-U5T1G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VIZ	-	S-1137B33-U5T1G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, CL	SOT-89-5	32es	VR7	6n	Sii
VJ2	-	S-1137C34-U5T1G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJ3	-	S-1137C35-U5T1G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJC	-	S-1137C12-U5T1G	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJD	-	S-1137C13-U5T1G	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJE	-	S-1137C14-U5T1G	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJF	-	S-1137C15-U5T1G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJG	-	S-1137C16-U5T1G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJH	-	S-1137C17-U5T1G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJI	-	S-1137C18-U5T1G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJJ	-	S-1137C1J-U5T1G	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJK	-	S-1137C19-U5T1G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJL	-	S-1137C20-U5T1G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJM	-	S-1137C21-U5T1G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJN	-	S-1137C22-U5T1G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJO	-	S-1137C23-U5T1G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJP	-	S-1137C24-U5T1G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJQ	-	S-1137C25-U5T1G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJR	-	S-1137C26-U5T1G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJS	-	S-1137C27-U5T1G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJT	-	S-1137C28-U5T1G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJU	-	S-1137C2J-U5T1G	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJV	-	S-1137C29-U5T1G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VJW	-	S-1137C30-U5T1G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJX	-	S-1137C31-U5T1G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJY	-	S-1137C32-U5T1G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VJZ	-	S-1137C33-U5T1G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, PDR	SOT-89-5	32es	VR7	6n	Sii
VK2	-	S-1137D34-U5T1G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VK3	-	S-1137D35-U5T1G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKC	-	S-1137D12-U5T1G	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKD	-	S-1137D13-U5T1G	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKE	-	S-1137D14-U5T1G	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKF	-	S-1137D15-U5T1G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKG	-	S-1137D16-U5T1G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKH	-	S-1137D17-U5T1G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKI	-	S-1137D18-U5T1G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKJ	-	S-1137D1J-U5T1G	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKK	-	S-1137D19-U5T1G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKL	-	S-1137D20-U5T1G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKM	-	S-1137D21-U5T1G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKN	-	S-1137D22-U5T1G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKO	-	S-1137D23-U5T1G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKP	-	S-1137D24-U5T1G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKQ	-	S-1137D25-U5T1G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKR	-	S-1137D26-U5T1G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKS	-	S-1137D27-U5T1G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKT	-	S-1137D28-U5T1G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKU	-	S-1137D2J-U5T1G	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKV	-	S-1137D29-U5T1G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKW	-	S-1137D30-U5T1G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKX	-	S-1137D31-U5T1G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKY	-	S-1137D32-U5T1G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
VKZ	-	S-1137D33-U5T1G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE	SOT-89-5	32es	VR7	6n	Sii
W020	-	R1190H020B	LVR-IC	2.0V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W021	-	R1190H021B	LVR-IC	2.1V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W022	-	R1190H022B	LVR-IC	2.2V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W023	-	R1190H023B	LVR-IC	2.3V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W024	-	R1190H024B	LVR-IC	2.4V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W025	-	R1190H025B	LVR-IC	2.5V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W026	-	R1190H026B	LVR-IC	2.6V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W027	-	R1190H027B	LVR-IC	2.7V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W028	-	R1190H028B	LVR-IC	2.8V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W029	-	R1190H029B	LVR-IC	2.9V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W030	-	R1190H030B	LVR-IC	3.0V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W031	-	R1190H031B	LVR-IC	3.1V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W032	-	R1190H032B	LVR-IC	3.2V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W033	-	R1190H033B	LVR-IC	3.3V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W034	-	R1190H034B	LVR-IC	3.4V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W035	-	R1190H035B	LVR-IC	3.5V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W036	-	R1190H036B	LVR-IC	3.6V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W037	-	R1190H037B	LVR-IC	3.7V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W038	-	R1190H038B	LVR-IC	3.8V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W039	-	R1190H039B	LVR-IC	3.9V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W040	-	R1190H040B	LVR-IC	4.0V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W041	-	R1190H041B	LVR-IC	4.1V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W042	-	R1190H042B	LVR-IC	4.2V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W043	-	R1190H043B	LVR-IC	4.3V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W044	-	R1190H044B	LVR-IC	4.4V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W045	-	R1190H045B	LVR-IC	4.5V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W046	-	R1190H046B	LVR-IC	4.6V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W047	-	R1190H047B	LVR-IC	4.7V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W048	-	R1190H048B	LVR-IC	4.8V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W049	-	R1190H049B	LVR-IC	4.9V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W050	-	R1190H050B	LVR-IC	5.0V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W051	-	R1190H051B	LVR-IC	5.1V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W052	-	R1190H052B	LVR-IC	5.2V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W053	-	R1190H053B	LVR-IC	5.3V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W054	-	R1190H054B	LVR-IC	5.4V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W055	-	R1190H055B	LVR-IC	5.5V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W056	-	R1190H056B	LVR-IC	5.6V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W057	-	R1190H057B	LVR-IC	5.7V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W058	-	R1190H058B	LVR-IC	5.8V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W059	-	R1190H059B	LVR-IC	5.9V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
W060	-	R1190H060B	LVR-IC	6.0V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W061	-	R1190H061B	LVR-IC	6.1V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W062	-	R1190H062B	LVR-IC	6.2V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W063	-	R1190H063B	LVR-IC	6.3V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W064	-	R1190H064B	LVR-IC	6.4V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W065	-	R1190H065B	LVR-IC	6.5V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W066	-	R1190H066B	LVR-IC	6.6V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W067	-	R1190H067B	LVR-IC	6.7V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W068	-	R1190H068B	LVR-IC	6.8V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W069	-	R1190H069B	LVR-IC	6.9V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W070	-	R1190H070B	LVR-IC	7.0V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W071	-	R1190H071B	LVR-IC	7.1V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W072	-	R1190H072B	LVR-IC	7.2V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W073	-	R1190H073B	LVR-IC	7.3V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W074	-	R1190H074B	LVR-IC	7.4V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W075	-	R1190H075B	LVR-IC	7.5V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W076	-	R1190H076B	LVR-IC	7.6V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W077	-	R1190H077B	LVR-IC	7.7V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W078	-	R1190H078B	LVR-IC	7.8V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W079	-	R1190H079B	LVR-IC	7.9V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W080	-	R1190H080B	LVR-IC	8.0V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W081	-	R1190H081B	LVR-IC	8.1V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W082	-	R1190H082B	LVR-IC	8.2V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W083	-	R1190H083B	LVR-IC	8.3V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W084	-	R1190H084B	LVR-IC	8.4V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W085	-	R1190H085B	LVR-IC	8.5V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W086	-	R1190H086B	LVR-IC	8.6V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W087	-	R1190H087B	LVR-IC	8.7V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W088	-	R1190H088B	LVR-IC	8.8V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W089	-	R1190H089B	LVR-IC	8.9V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W090	-	R1190H090B	LVR-IC	9.0V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W091	-	R1190H091B	LVR-IC	9.1V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W092	-	R1190H092B	LVR-IC	9.2V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W093	-	R1190H093B	LVR-IC	9.3V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W094	-	R1190H094B	LVR-IC	9.4V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W095	-	R1190H095B	LVR-IC	9.5V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W096	-	R1190H096B	LVR-IC	9.6V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W097	-	R1190H097B	LVR-IC	9.7V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W098	-	R1190H098B	LVR-IC	9.8V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W099	-	R1190H099B	LVR-IC	9.9V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W100	-	R1190H100B	LVR-IC	10.0V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W101	-	R1190H101B	LVR-IC	10.1V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W102	-	R1190H102B	LVR-IC	10.2V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W103	-	R1190H103B	LVR-IC	10.3V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W104	-	R1190H104B	LVR-IC	10.4V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W105	-	R1190H105B	LVR-IC	10.5V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W106	-	R1190H106B	LVR-IC	10.6V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W107	-	R1190H107B	LVR-IC	10.7V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W108	-	R1190H108B	LVR-IC	10.8V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W109	-	R1190H109B	LVR-IC	10.9V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W110	-	R1190H110B	LVR-IC	11.0V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W111	-	R1190H111B	LVR-IC	11.1V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W112	-	R1190H112B	LVR-IC	11.2V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W113	-	R1190H113B	LVR-IC	11.3V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W114	-	R1190H114B	LVR-IC	11.4V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W115	-	R1190H115B	LVR-IC	11.5V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W116	-	R1190H116B	LVR-IC	11.6V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W117	-	R1190H117B	LVR-IC	11.7V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W118	-	R1190H118B	LVR-IC	11.8V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W119	-	R1190H119B	LVR-IC	11.9V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
W120	-	R1190H120B	LVR-IC	12.0V±1.5%, 1A, +CE	SOT-89-5	32zt	VR7	6h	Ric
WR2	-	S-13A1A33-U5T1U3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WR3	-	S-13A1A34-U5T1U3	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WR4	-	S-13A1A35-U5T1U3	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WR5	-	S-13A1A1C-U5T1U3	LVR-IC	LDO, 1.25V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRA	-	S-13A1A00-U5T1U3	LVR-IC	LDO, Adjustable 1.05..5.5V±15mV, 300mA, +CE, CL, PDR	SOT-89-5	32vri	VR5	6n	Sii
WRB	-	S-13A1A10-U5T1U3	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRC	-	S-13A1A11-U5T1U3	LVR-IC	LDO, 1.1V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRD	-	S-13A1A12-U5T1U3	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRE	-	S-13A1A13-U5T1U3	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
WRF	-	S-13A1A14-U5T1U3	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRG	-	S-13A1A15-U5T1U3	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRH	-	S-13A1A16-U5T1U3	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRI	-	S-13A1A17-U5T1U3	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRJ	-	S-13A1A18-U5T1U3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRK	-	S-13A1A1J-U5T1U3	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRL	-	S-13A1A19-U5T1U3	LVR-IC	LDO, 1.9V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRM	-	S-13A1A20-U5T1U3	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRN	-	S-13A1A21-U5T1U3	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRO	-	S-13A1A22-U5T1U3	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRP	-	S-13A1A23-U5T1U3	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRQ	-	S-13A1A24-U5T1U3	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRR	-	S-13A1A25-U5T1U3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRS	-	S-13A1A26-U5T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRT	-	S-13A1A27-U5T1U3	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRU	-	S-13A1A28-U5T1U3	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRV	-	S-13A1A2J-U5T1U3	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRW	-	S-13A1A29-U5T1U3	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRX	-	S-13A1A30-U5T1U3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRY	-	S-13A1A31-U5T1U3	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WRZ	-	S-13A1A32-U5T1U3	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, PDR	SOT-89-5	32a7	VR23	6n	Sii
WS2	-	S-13A1B33-U5T1U3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WS3	-	S-13A1B34-U5T1U3	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WS4	-	S-13A1B35-U5T1U3	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WS5	-	S-13A1B1C-U5T1U3	LVR-IC	LDO, 1.25V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSA	-	S-13A1B00-U5T1U3	LVR-IC	LDO, Adjustable 1.05..5.5V±15mV, 300mA, +CE, CL	SOT-89-5	32vri	VR5	6n	Sii
WSB	-	S-13A1B10-U5T1U3	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSC	-	S-13A1B11-U5T1U3	LVR-IC	LDO, 1.1V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSD	-	S-13A1B12-U5T1U3	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSE	-	S-13A1B13-U5T1U3	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSF	-	S-13A1B14-U5T1U3	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSG	-	S-13A1B15-U5T1U3	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSH	-	S-13A1B16-U5T1U3	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSI	-	S-13A1B17-U5T1U3	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSJ	-	S-13A1B18-U5T1U3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSK	-	S-13A1B1J-U5T1U3	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSL	-	S-13A1B19-U5T1U3	LVR-IC	LDO, 1.9V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSM	-	S-13A1B20-U5T1U3	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSN	-	S-13A1B21-U5T1U3	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSO	-	S-13A1B22-U5T1U3	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSP	-	S-13A1B23-U5T1U3	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSQ	-	S-13A1B24-U5T1U3	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSR	-	S-13A1B25-U5T1U3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSS	-	S-13A1B26-U5T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WST	-	S-13A1B27-U5T1U3	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSU	-	S-13A1B28-U5T1U3	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSV	-	S-13A1B2J-U5T1U3	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSW	-	S-13A1B29-U5T1U3	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSX	-	S-13A1B30-U5T1U3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSY	-	S-13A1B31-U5T1U3	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WSZ	-	S-13A1B32-U5T1U3	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL	SOT-89-5	32a7	VR23	6n	Sii
WT2	-	S-13A1C33-U5T1U3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WT3	-	S-13A1C34-U5T1U3	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WT4	-	S-13A1C35-U5T1U3	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WT5	-	S-13A1C1C-U5T1U3	LVR-IC	LDO, 1.25V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTA	-	S-13A1C00-U5T1U3	LVR-IC	LDO, Adjustable 1.05..5.5V±15mV, 300mA, +CE, PDR	SOT-89-5	32vri	VR5	6n	Sii
WTB	-	S-13A1C10-U5T1U3	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTC	-	S-13A1C11-U5T1U3	LVR-IC	LDO, 1.1V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTD	-	S-13A1C12-U5T1U3	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTE	-	S-13A1C13-U5T1U3	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTF	-	S-13A1C14-U5T1U3	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTG	-	S-13A1C15-U5T1U3	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTH	-	S-13A1C16-U5T1U3	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTI	-	S-13A1C17-U5T1U3	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTJ	-	S-13A1C18-U5T1U3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTK	-	S-13A1C1J-U5T1U3	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTL	-	S-13A1C19-U5T1U3	LVR-IC	LDO, 1.9V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTM	-	S-13A1C20-U5T1U3	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTN	-	S-13A1C21-U5T1U3	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTO	-	S-13A1C22-U5T1U3	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
WTP	-	S-13A1C23-U5T1U3	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTQ	-	S-13A1C24-U5T1U3	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTR	-	S-13A1C25-U5T1U3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTS	-	S-13A1C26-U5T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTT	-	S-13A1C27-U5T1U3	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTU	-	S-13A1C28-U5T1U3	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTV	-	S-13A1C2J-U5T1U3	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTW	-	S-13A1C29-U5T1U3	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTX	-	S-13A1C30-U5T1U3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTY	-	S-13A1C31-U5T1U3	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WTZ	-	S-13A1C32-U5T1U3	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, PDR	SOT-89-5	32a7	VR23	6n	Sii
WU2	-	S-13A1D33-U5T1U3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WU3	-	S-13A1D34-U5T1U3	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WU4	-	S-13A1D35-U5T1U3	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WU5	-	S-13A1D1C-U5T1U3	LVR-IC	LDO, 1.25V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUA	-	S-13A1D00-U5T1U3	LVR-IC	LDO, Adjustable 1.05..5.5V±15mV, 300mA, +CE	SOT-89-5	32vri	VR5	6n	Sii
WUB	-	S-13A1D10-U5T1U3	LVR-IC	LDO, 1.0V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUC	-	S-13A1D11-U5T1U3	LVR-IC	LDO, 1.1V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUD	-	S-13A1D12-U5T1U3	LVR-IC	LDO, 1.2V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUE	-	S-13A1D13-U5T1U3	LVR-IC	LDO, 1.3V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUF	-	S-13A1D14-U5T1U3	LVR-IC	LDO, 1.4V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUG	-	S-13A1D15-U5T1U3	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUH	-	S-13A1D16-U5T1U3	LVR-IC	LDO, 1.6V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUI	-	S-13A1D17-U5T1U3	LVR-IC	LDO, 1.7V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUJ	-	S-13A1D18-U5T1U3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUK	-	S-13A1D1J-U5T1U3	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUL	-	S-13A1D19-U5T1U3	LVR-IC	LDO, 1.9V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUM	-	S-13A1D20-U5T1U3	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUN	-	S-13A1D21-U5T1U3	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUO	-	S-13A1D22-U5T1U3	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUP	-	S-13A1D23-U5T1U3	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUQ	-	S-13A1D24-U5T1U3	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUR	-	S-13A1D25-U5T1U3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUS	-	S-13A1D26-U5T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUT	-	S-13A1D27-U5T1U3	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUU	-	S-13A1D28-U5T1U3	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUV	-	S-13A1D2J-U5T1U3	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUW	-	S-13A1D29-U5T1U3	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUX	-	S-13A1D30-U5T1U3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUY	-	S-13A1D31-U5T1U3	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
WUZ	-	S-13A1D32-U5T1U3	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SOT-89-5	32a7	VR23	6n	Sii
X020	-	R1190H020D	LVR-IC	2.0V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X021	-	R1190H021D	LVR-IC	2.1V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X022	-	R1190H022D	LVR-IC	2.2V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X023	-	R1190H023D	LVR-IC	2.3V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X024	-	R1190H024D	LVR-IC	2.4V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X025	-	R1190H025D	LVR-IC	2.5V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X026	-	R1190H026D	LVR-IC	2.6V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X027	-	R1190H027D	LVR-IC	2.7V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X028	-	R1190H028D	LVR-IC	2.8V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X029	-	R1190H029D	LVR-IC	2.9V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X030	-	R1190H030D	LVR-IC	3.0V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X031	-	R1190H031D	LVR-IC	3.1V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X032	-	R1190H032D	LVR-IC	3.2V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X033	-	R1190H033D	LVR-IC	3.3V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X034	-	R1190H034D	LVR-IC	3.4V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X035	-	R1190H035D	LVR-IC	3.5V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X036	-	R1190H036D	LVR-IC	3.6V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X037	-	R1190H037D	LVR-IC	3.7V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X038	-	R1190H038D	LVR-IC	3.8V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X039	-	R1190H039D	LVR-IC	3.9V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X040	-	R1190H040D	LVR-IC	4.0V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X041	-	R1190H041D	LVR-IC	4.1V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X042	-	R1190H042D	LVR-IC	4.2V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X043	-	R1190H043D	LVR-IC	4.3V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X044	-	R1190H044D	LVR-IC	4.4V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X045	-	R1190H045D	LVR-IC	4.5V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X046	-	R1190H046D	LVR-IC	4.6V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X047	-	R1190H047D	LVR-IC	4.7V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X048	-	R1190H048D	LVR-IC	4.8V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
X049	-	R1190H049D	LVR-IC	4.9V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X050	-	R1190H050D	LVR-IC	5.0V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X051	-	R1190H051D	LVR-IC	5.1V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X052	-	R1190H052D	LVR-IC	5.2V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X053	-	R1190H053D	LVR-IC	5.3V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X054	-	R1190H054D	LVR-IC	5.4V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X055	-	R1190H055D	LVR-IC	5.5V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X056	-	R1190H056D	LVR-IC	5.6V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X057	-	R1190H057D	LVR-IC	5.7V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X058	-	R1190H058D	LVR-IC	5.8V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X059	-	R1190H059D	LVR-IC	5.9V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X060	-	R1190H060D	LVR-IC	6.0V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X061	-	R1190H061D	LVR-IC	6.1V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X062	-	R1190H062D	LVR-IC	6.2V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X063	-	R1190H063D	LVR-IC	6.3V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X064	-	R1190H064D	LVR-IC	6.4V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X065	-	R1190H065D	LVR-IC	6.5V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X066	-	R1190H066D	LVR-IC	6.6V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X067	-	R1190H067D	LVR-IC	6.7V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X068	-	R1190H068D	LVR-IC	6.8V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X069	-	R1190H069D	LVR-IC	6.9V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X070	-	R1190H070D	LVR-IC	7.0V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X071	-	R1190H071D	LVR-IC	7.1V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X072	-	R1190H072D	LVR-IC	7.2V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X073	-	R1190H073D	LVR-IC	7.3V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X074	-	R1190H074D	LVR-IC	7.4V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X075	-	R1190H075D	LVR-IC	7.5V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X076	-	R1190H076D	LVR-IC	7.6V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X077	-	R1190H077D	LVR-IC	7.7V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X078	-	R1190H078D	LVR-IC	7.8V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X079	-	R1190H079D	LVR-IC	7.9V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X080	-	R1190H080D	LVR-IC	8.0V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X081	-	R1190H081D	LVR-IC	8.1V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X082	-	R1190H082D	LVR-IC	8.2V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X083	-	R1190H083D	LVR-IC	8.3V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X084	-	R1190H084D	LVR-IC	8.4V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X085	-	R1190H085D	LVR-IC	8.5V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X086	-	R1190H086D	LVR-IC	8.6V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X087	-	R1190H087D	LVR-IC	8.7V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X088	-	R1190H088D	LVR-IC	8.8V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X089	-	R1190H089D	LVR-IC	8.9V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X090	-	R1190H090D	LVR-IC	9.0V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X091	-	R1190H091D	LVR-IC	9.1V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X092	-	R1190H092D	LVR-IC	9.2V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X093	-	R1190H093D	LVR-IC	9.3V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X094	-	R1190H094D	LVR-IC	9.4V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X095	-	R1190H095D	LVR-IC	9.5V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X096	-	R1190H096D	LVR-IC	9.6V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X097	-	R1190H097D	LVR-IC	9.7V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X098	-	R1190H098D	LVR-IC	9.8V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X099	-	R1190H099D	LVR-IC	9.9V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X100	-	R1190H100D	LVR-IC	10.0V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X101	-	R1190H101D	LVR-IC	10.1V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X102	-	R1190H102D	LVR-IC	10.2V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X103	-	R1190H103D	LVR-IC	10.3V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X104	-	R1190H104D	LVR-IC	10.4V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X105	-	R1190H105D	LVR-IC	10.5V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X106	-	R1190H106D	LVR-IC	10.6V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X107	-	R1190H107D	LVR-IC	10.7V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X108	-	R1190H108D	LVR-IC	10.8V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X109	-	R1190H109D	LVR-IC	10.9V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X110	-	R1190H110D	LVR-IC	11.0V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X111	-	R1190H111D	LVR-IC	11.1V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X112	-	R1190H112D	LVR-IC	11.2V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X113	-	R1190H113D	LVR-IC	11.3V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X114	-	R1190H114D	LVR-IC	11.4V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X115	-	R1190H115D	LVR-IC	11.5V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X116	-	R1190H116D	LVR-IC	11.6V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X117	-	R1190H117D	LVR-IC	11.7V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X118	-	R1190H118D	LVR-IC	11.8V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
X119	-	R1190H119D	LVR-IC	11.9V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
X120	-	R1190H120D	LVR-IC	12.0V±1.5%, 1A, +CE, CL	SOT-89-5	32zt	VR7	6h	Ric
XA0	-	LN6219A312PR	LVR-IC	LDO, 3.1V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XA1	-	LN6219A322PR	LVR-IC	LDO, 3.2V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XA2	-	LN6219A332PR	LVR-IC	LDO, 3.3V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XA3	-	LN6219A342PR	LVR-IC	LDO, 3.4V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XA4	-	LN6219A352PR	LVR-IC	LDO, 3.5V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XA5	-	LN6219A362PR	LVR-IC	LDO, 3.6V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XA6	-	LN6219A372PR	LVR-IC	LDO, 3.7V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XA7	-	LN6219A382PR	LVR-IC	LDO, 3.8V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XA8	-	LN6219A392PR	LVR-IC	LDO, 3.9V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XA9	-	LN6219A402PR	LVR-IC	LDO, 4.0V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XAA	-	LN6219A412PR	LVR-IC	LDO, 4.1V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XAB	-	LN6219A422PR	LVR-IC	LDO, 4.2V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XAC	-	LN6219A432PR	LVR-IC	LDO, 4.3V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XAD	-	LN6219A442PR	LVR-IC	LDO, 4.4V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XAE	-	LN6219A452PR	LVR-IC	LDO, 4.5V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XAF	-	LN6219A462PR	LVR-IC	LDO, 4.6V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XAH	-	LN6219A472PR	LVR-IC	LDO, 4.7V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XAK	-	LN6219A482PR	LVR-IC	LDO, 4.8V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XAL	-	LN6219A492PR	LVR-IC	LDO, 4.9V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XAM	-	LN6219A502PR	LVR-IC	LDO, 5.0V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XB0	-	LN6219B312PR	LVR-IC	LDO, 3.1V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XB1	-	LN6219B322PR	LVR-IC	LDO, 3.2V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XB2	-	LN6219B332PR	LVR-IC	LDO, 3.3V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XB3	-	LN6219B342PR	LVR-IC	LDO, 3.4V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XB4	-	LN6219B352PR	LVR-IC	LDO, 3.5V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XB5	-	LN6219B362PR	LVR-IC	LDO, 3.6V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XB6	-	LN6219B372PR	LVR-IC	LDO, 3.7V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XB7	-	LN6219B382PR	LVR-IC	LDO, 3.8V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XB8	-	LN6219B392PR	LVR-IC	LDO, 3.9V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XB9	-	LN6219B402PR	LVR-IC	LDO, 4.0V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XBA	-	LN6219B412PR	LVR-IC	LDO, 4.1V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XBB	-	LN6219B422PR	LVR-IC	LDO, 4.2V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XBC	-	LN6219B432PR	LVR-IC	LDO, 4.3V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XBD	-	LN6219B442PR	LVR-IC	LDO, 4.4V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XBE	-	LN6219B452PR	LVR-IC	LDO, 4.5V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XBF	-	LN6219B462PR	LVR-IC	LDO, 4.6V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XBH	-	LN6219B472PR	LVR-IC	LDO, 4.7V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XBK	-	LN6219B482PR	LVR-IC	LDO, 4.8V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XBL	-	LN6219B492PR	LVR-IC	LDO, 4.9V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XBM	-	LN6219B502PR	LVR-IC	LDO, 5.0V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XC0	-	LN6219C312PR	LVR-IC	LDO, 3.1V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XC1	-	LN6219C322PR	LVR-IC	LDO, 3.2V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XC2	-	LN6219C332PR	LVR-IC	LDO, 3.3V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XC3	-	LN6219C342PR	LVR-IC	LDO, 3.4V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XC4	-	LN6219C352PR	LVR-IC	LDO, 3.5V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XC5	-	LN6219C362PR	LVR-IC	LDO, 3.6V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XC6	-	LN6219C372PR	LVR-IC	LDO, 3.7V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XC7	-	LN6219C382PR	LVR-IC	LDO, 3.8V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XC8	-	LN6219C392PR	LVR-IC	LDO, 3.9V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XC9	-	LN6219C402PR	LVR-IC	LDO, 4.0V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XCA	-	LN6219C412PR	LVR-IC	LDO, 4.1V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XCB	-	LN6219C422PR	LVR-IC	LDO, 4.2V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XCC	-	LN6219C432PR	LVR-IC	LDO, 4.3V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XCD	-	LN6219C442PR	LVR-IC	LDO, 4.4V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XCE	-	LN6219C452PR	LVR-IC	LDO, 4.5V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XCF	-	LN6219C462PR	LVR-IC	LDO, 4.6V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XCH	-	LN6219C472PR	LVR-IC	LDO, 4.7V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XCK	-	LN6219C482PR	LVR-IC	LDO, 4.8V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XCL	-	LN6219C492PR	LVR-IC	LDO, 4.9V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XCM	-	LN6219C502PR	LVR-IC	LDO, 5.0V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XD0	-	LN6219D312PR	LVR-IC	LDO, 3.1V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XD1	-	LN6219D322PR	LVR-IC	LDO, 3.2V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XD2	-	LN6219D332PR	LVR-IC	LDO, 3.3V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XD3	-	LN6219D342PR	LVR-IC	LDO, 3.4V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XD4	-	LN6219D352PR	LVR-IC	LDO, 3.5V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XD5	-	LN6219D362PR	LVR-IC	LDO, 3.6V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XD6	-	LN6219D372PR	LVR-IC	LDO, 3.7V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XD7	-	LN6219D382PR	LVR-IC	LDO, 3.8V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XD8	-	LN6219D392PR	LVR-IC	LDO, 3.9V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XD9	-	LN6219D402PR	LVR-IC	LDO, 4.0V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XDA	-	LN6219D412PR	LVR-IC	LDO, 4.1V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XDB	-	LN6219D422PR	LVR-IC	LDO, 4.2V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XDC	-	LN6219D432PR	LVR-IC	LDO, 4.3V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XDD	-	LN6219D442PR	LVR-IC	LDO, 4.4V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XDE	-	LN6219D452PR	LVR-IC	LDO, 4.5V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XDF	-	LN6219D462PR	LVR-IC	LDO, 4.6V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XDH	-	LN6219D472PR	LVR-IC	LDO, 4.7V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XDK	-	LN6219D482PR	LVR-IC	LDO, 4.8V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XDL	-	LN6219D492PR	LVR-IC	LDO, 4.9V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XDM	-	LN6219D502PR	LVR-IC	LDO, 5.0V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XE8	-	LN6219A09APR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XE9	-	LN6219A10APR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XEA	-	LN6219A11APR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XEB	-	LN6219A12APR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XEC	-	LN6219A13APR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XED	-	LN6219A14APR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XEE	-	LN6219A15APR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XEF	-	LN6219A16APR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XEH	-	LN6219A17APR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XEK	-	LN6219A18APR	LVR-IC	LDO, 1.85V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XEL	-	LN6219A19APR	LVR-IC	LDO, 1.95V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XEM	-	LN6219A20APR	LVR-IC	LDO, 2.05V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XEN	-	LN6219A21APR	LVR-IC	LDO, 2.15V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XEP	-	LN6219A22APR	LVR-IC	LDO, 2.25V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XER	-	LN6219A23APR	LVR-IC	LDO, 2.35V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XES	-	LN6219A24APR	LVR-IC	LDO, 2.45V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XET	-	LN6219A25APR	LVR-IC	LDO, 2.55V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XEU	-	LN6219A26APR	LVR-IC	LDO, 2.65V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XEV	-	LN6219A27APR	LVR-IC	LDO, 2.75V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XEX	-	LN6219A28APR	LVR-IC	LDO, 2.85V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XEY	-	LN6219A29APR	LVR-IC	LDO, 2.95V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XEZ	-	LN6219A30APR	LVR-IC	LDO, 3.05V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XF8	-	LN6219B09APR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XF9	-	LN6219B10APR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFA	-	LN6219B11APR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFB	-	LN6219B12APR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFC	-	LN6219B13APR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFD	-	LN6219B14APR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFE	-	LN6219B15APR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFF	-	LN6219B16APR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFH	-	LN6219B17APR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFK	-	LN6219B18APR	LVR-IC	LDO, 1.85V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFL	-	LN6219B19APR	LVR-IC	LDO, 1.95V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFM	-	LN6219B20APR	LVR-IC	LDO, 2.05V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFN	-	LN6219B21APR	LVR-IC	LDO, 2.15V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFP	-	LN6219B22APR	LVR-IC	LDO, 2.25V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFR	-	LN6219B23APR	LVR-IC	LDO, 2.35V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFS	-	LN6219B24APR	LVR-IC	LDO, 2.45V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFT	-	LN6219B25APR	LVR-IC	LDO, 2.55V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFU	-	LN6219B26APR	LVR-IC	LDO, 2.65V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFV	-	LN6219B27APR	LVR-IC	LDO, 2.75V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFX	-	LN6219B28APR	LVR-IC	LDO, 2.85V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFY	-	LN6219B29BPR	LVR-IC	LDO, 2.95V±1%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XFZ	-	LN6219B30APR	LVR-IC	LDO, 3.05V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XH8	-	LN6219C09APR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XH9	-	LN6219C10APR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHA	-	LN6219C11APR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHB	-	LN6219C12APR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHC	-	LN6219C13APR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHD	-	LN6219C14APR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHE	-	LN6219C15APR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHF	-	LN6219C16APR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHH	-	LN6219C17APR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHK	-	LN6219C18APR	LVR-IC	LDO, 1.85V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHL	-	LN6219C19APR	LVR-IC	LDO, 1.95V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHM	-	LN6219C20APR	LVR-IC	LDO, 2.05V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHN	-	LN6219C21APR	LVR-IC	LDO, 2.15V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHP	-	LN6219C22APR	LVR-IC	LDO, 2.25V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XHR	-	LN6219C23APR	LVR-IC	LDO, 2.35V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHS	-	LN6219C24APR	LVR-IC	LDO, 2.45V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHT	-	LN6219C25APR	LVR-IC	LDO, 2.55V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHU	-	LN6219C26APR	LVR-IC	LDO, 2.65V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHV	-	LN6219C27APR	LVR-IC	LDO, 2.75V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHX	-	LN6219C28APR	LVR-IC	LDO, 2.85V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHY	-	LN6219C29APR	LVR-IC	LDO, 2.95V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XHZ	-	LN6219C30APR	LVR-IC	LDO, 3.05V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XK8	-	LN6219D09APR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XK9	-	LN6219D10APR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKA	-	LN6219D11APR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKB	-	LN6219D12APR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKC	-	LN6219D13APR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKD	-	LN6219D14APR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKE	-	LN6219D15APR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKF	-	LN6219D16APR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKH	-	LN6219D17APR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKK	-	LN6219D18APR	LVR-IC	LDO, 1.85V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKL	-	LN6219D19APR	LVR-IC	LDO, 1.95V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKM	-	LN6219D20APR	LVR-IC	LDO, 2.05V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKN	-	LN6219D21APR	LVR-IC	LDO, 2.15V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKP	-	LN6219D22APR	LVR-IC	LDO, 2.25V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKR	-	LN6219D23APR	LVR-IC	LDO, 2.35V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKS	-	LN6219D24APR	LVR-IC	LDO, 2.45V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKT	-	LN6219D25APR	LVR-IC	LDO, 2.55V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKU	-	LN6219D26APR	LVR-IC	LDO, 2.65V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKV	-	LN6219D27APR	LVR-IC	LDO, 2.75V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKX	-	LN6219D28APR	LVR-IC	LDO, 2.85V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKY	-	LN6219D29APR	LVR-IC	LDO, 2.95V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XKZ	-	LN6219D30APR	LVR-IC	LDO, 3.05V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XL0	-	LN6219A31APR	LVR-IC	LDO, 3.15V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XL1	-	LN6219A32APR	LVR-IC	LDO, 3.25V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XL2	-	LN6219A33APR	LVR-IC	LDO, 3.35V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XL3	-	LN6219A34APR	LVR-IC	LDO, 3.45V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XL4	-	LN6219A35APR	LVR-IC	LDO, 3.55V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XL5	-	LN6219A36APR	LVR-IC	LDO, 3.65V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XL6	-	LN6219A37APR	LVR-IC	LDO, 3.75V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XL7	-	LN6219A38APR	LVR-IC	LDO, 3.85V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XL8	-	LN6219A39APR	LVR-IC	LDO, 3.95V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XL9	-	LN6219A40APR	LVR-IC	LDO, 4.05V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XLA	-	LN6219A41APR	LVR-IC	LDO, 4.15V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XLB	-	LN6219A42APR	LVR-IC	LDO, 4.25V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XLC	-	LN6219A43APR	LVR-IC	LDO, 4.35V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XLD	-	LN6219A44APR	LVR-IC	LDO, 4.45V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XLE	-	LN6219A45APR	LVR-IC	LDO, 4.55V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XLF	-	LN6219A46APR	LVR-IC	LDO, 4.65V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XLH	-	LN6219A47APR	LVR-IC	LDO, 4.75V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XLK	-	LN6219A48APR	LVR-IC	LDO, 4.85V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XLL	-	LN6219A49APR	LVR-IC	LDO, 4.95V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XM0	-	LN6219B31APR	LVR-IC	LDO, 3.15V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XM1	-	LN6219B32APR	LVR-IC	LDO, 3.25V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XM2	-	LN6219B33APR	LVR-IC	LDO, 3.35V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XM3	-	LN6219B34APR	LVR-IC	LDO, 3.45V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XM4	-	LN6219B35APR	LVR-IC	LDO, 3.55V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XM5	-	LN6219B36APR	LVR-IC	LDO, 3.65V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XM6	-	LN6219B37APR	LVR-IC	LDO, 3.75V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XM7	-	LN6219B38APR	LVR-IC	LDO, 3.85V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XM8	-	LN6219B39APR	LVR-IC	LDO, 3.95V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XM9	-	LN6219B40APR	LVR-IC	LDO, 4.05V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XMA	-	LN6219B41APR	LVR-IC	LDO, 4.15V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XMB	-	LN6219B42APR	LVR-IC	LDO, 4.25V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XMC	-	LN6219B43APR	LVR-IC	LDO, 4.35V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XMD	-	LN6219B44APR	LVR-IC	LDO, 4.45V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XME	-	LN6219B45APR	LVR-IC	LDO, 4.55V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XMF	-	LN6219B46APR	LVR-IC	LDO, 4.65V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XMH	-	LN6219B47APR	LVR-IC	LDO, 4.75V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XMK	-	LN6219B48APR	LVR-IC	LDO, 4.85V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XML	-	LN6219B49APR	LVR-IC	LDO, 4.95V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XN0	-	LN6219C31APR	LVR-IC	LDO, 3.15V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XN1	-	LN6219C32APR	LVR-IC	LDO, 3.25V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XN2	-	LN6219C33APR	LVR-IC	LDO, 3.35V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XN3	-	LN6219C34APR	LVR-IC	LDO, 3.45V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XN4	-	LN6219C35APR	LVR-IC	LDO, 3.55V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XN5	-	LN6219C36APR	LVR-IC	LDO, 3.65V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XN6	-	LN6219C37APR	LVR-IC	LDO, 3.75V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XN7	-	LN6219C38APR	LVR-IC	LDO, 3.85V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XN8	-	LN6219C39APR	LVR-IC	LDO, 3.95V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XN9	-	LN6219C40APR	LVR-IC	LDO, 4.05V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XNA	-	LN6219C41APR	LVR-IC	LDO, 4.15V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XNB	-	LN6219C42APR	LVR-IC	LDO, 4.25V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XNC	-	LN6219C43APR	LVR-IC	LDO, 4.35V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XND	-	LN6219C44APR	LVR-IC	LDO, 4.45V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XNE	-	LN6219C45APR	LVR-IC	LDO, 4.55V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XNF	-	LN6219C46APR	LVR-IC	LDO, 4.65V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XNH	-	LN6219C47APR	LVR-IC	LDO, 4.75V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XNK	-	LN6219C48APR	LVR-IC	LDO, 4.85V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XNL	-	LN6219C49APR	LVR-IC	LDO, 4.95V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XP0	-	LN6219D31APR	LVR-IC	LDO, 3.15V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XP1	-	LN6219D32APR	LVR-IC	LDO, 3.25V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XP2	-	LN6219D33APR	LVR-IC	LDO, 3.35V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XP3	-	LN6219D34APR	LVR-IC	LDO, 3.45V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XP4	-	LN6219D35APR	LVR-IC	LDO, 3.55V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XP5	-	LN6219D36APR	LVR-IC	LDO, 3.65V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XP6	-	LN6219D37APR	LVR-IC	LDO, 3.75V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XP7	-	LN6219D38APR	LVR-IC	LDO, 3.85V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XP8	-	LN6219D39APR	LVR-IC	LDO, 3.95V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XP9	-	LN6219D40APR	LVR-IC	LDO, 4.05V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XPA	-	LN6219D41APR	LVR-IC	LDO, 4.15V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XPB	-	LN6219D42APR	LVR-IC	LDO, 4.25V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XPC	-	LN6219D43APR	LVR-IC	LDO, 4.35V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XPD	-	LN6219D44APR	LVR-IC	LDO, 4.45V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XPE	-	LN6219D45APR	LVR-IC	LDO, 4.55V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XPF	-	LN6219D46APR	LVR-IC	LDO, 4.65V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XPH	-	LN6219D47APR	LVR-IC	LDO, 4.75V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XPK	-	LN6219D48APR	LVR-IC	LDO, 4.85V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XPL	-	LN6219D49APR	LVR-IC	LDO, 4.95V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XV8	-	LN6219A092PR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XV9	-	LN6219A102PR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVA	-	LN6219A112PR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVB	-	LN6219A122PR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVC	-	LN6219A132PR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVD	-	LN6219A142PR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVE	-	LN6219A152PR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVF	-	LN6219A162PR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVH	-	LN6219A172PR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVK	-	LN6219A182PR	LVR-IC	LDO, 1.8V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVL	-	LN6219A192PR	LVR-IC	LDO, 1.9V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVM	-	LN6219A202PR	LVR-IC	LDO, 2.0V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVN	-	LN6219A212PR	LVR-IC	LDO, 2.1V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVP	-	LN6219A222PR	LVR-IC	LDO, 2.2V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVR	-	LN6219A232PR	LVR-IC	LDO, 2.3V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVS	-	LN6219A242PR	LVR-IC	LDO, 2.4V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVT	-	LN6219A252PR	LVR-IC	LDO, 2.5V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVU	-	LN6219A262PR	LVR-IC	LDO, 2.6V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVV	-	LN6219A272PR	LVR-IC	LDO, 2.7V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVX	-	LN6219A282PR	LVR-IC	LDO, 2.8V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVY	-	LN6219A292PR	LVR-IC	LDO, 2.9V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XVZ	-	LN6219A302PR	LVR-IC	LDO, 3.0V±2%, 240mA, +CE, PDR	SOT-89-5	32um	VR4	6h	Inw
XX8	-	LN6219B092PR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XX9	-	LN6219B102PR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXA	-	LN6219B112PR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXB	-	LN6219B122PR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXC	-	LN6219B132PR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXD	-	LN6219B142PR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXE	-	LN6219B152PR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXF	-	LN6219B162PR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXH	-	LN6219B172PR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXK	-	LN6219B182PR	LVR-IC	LDO, 1.8V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXL	-	LN6219B192PR	LVR-IC	LDO, 1.9V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXM	-	LN6219B202PR	LVR-IC	LDO, 2.0V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XXN	-	LN6219B212PR	LVR-IC	LDO, 2.1V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXP	-	LN6219B222PR	LVR-IC	LDO, 2.2V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXR	-	LN6219B232PR	LVR-IC	LDO, 2.3V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXS	-	LN6219B242PR	LVR-IC	LDO, 2.4V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXT	-	LN6219B252PR	LVR-IC	LDO, 2.5V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXU	-	LN6219B262PR	LVR-IC	LDO, 2.6V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXV	-	LN6219B272PR	LVR-IC	LDO, 2.7V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXX	-	LN6219B282PR	LVR-IC	LDO, 2.8V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXY	-	LN6219B292PR	LVR-IC	LDO, 2.9V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XXZ	-	LN6219B302PR	LVR-IC	LDO, 3.0V±2%, 240mA, +CE	SOT-89-5	32um	VR4	6h	Inw
XY8	-	LN6219C092PR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XY9	-	LN6219C102PR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYA	-	LN6219C112PR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYB	-	LN6219C122PR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYC	-	LN6219C132PR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYD	-	LN6219C142PR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYE	-	LN6219C152PR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYF	-	LN6219C162PR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYH	-	LN6219C172PR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYK	-	LN6219C182PR	LVR-IC	LDO, 1.8V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYL	-	LN6219C192PR	LVR-IC	LDO, 1.9V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYM	-	LN6219C202PR	LVR-IC	LDO, 2.0V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYN	-	LN6219C212PR	LVR-IC	LDO, 2.1V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYP	-	LN6219C222PR	LVR-IC	LDO, 2.2V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYR	-	LN6219C232PR	LVR-IC	LDO, 2.3V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYS	-	LN6219C242PR	LVR-IC	LDO, 2.4V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYT	-	LN6219C252PR	LVR-IC	LDO, 2.5V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYU	-	LN6219C262PR	LVR-IC	LDO, 2.6V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYV	-	LN6219C272PR	LVR-IC	LDO, 2.7V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYX	-	LN6219C282PR	LVR-IC	LDO, 2.8V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYY	-	LN6219C292PR	LVR-IC	LDO, 2.9V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XYZ	-	LN6219C302PR	LVR-IC	LDO, 3.0V±2%, 240mA, -CE, PUR	SOT-89-5	32um	VR4	6h	Inw
XZ8	-	LN6219D092PR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZ9	-	LN6219D102PR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZA	-	LN6219D112PR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZB	-	LN6219D122PR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZC	-	LN6219D132PR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZD	-	LN6219D142PR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZE	-	LN6219D152PR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZF	-	LN6219D162PR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZH	-	LN6219D172PR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZK	-	LN6219D182PR	LVR-IC	LDO, 1.8V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZL	-	LN6219D192PR	LVR-IC	LDO, 1.9V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZM	-	LN6219D202PR	LVR-IC	LDO, 2.0V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZN	-	LN6219D212PR	LVR-IC	LDO, 2.1V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZP	-	LN6219D222PR	LVR-IC	LDO, 2.2V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZR	-	LN6219D232PR	LVR-IC	LDO, 2.3V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZS	-	LN6219D242PR	LVR-IC	LDO, 2.4V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZT	-	LN6219D252PR	LVR-IC	LDO, 2.5V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZU	-	LN6219D262PR	LVR-IC	LDO, 2.6V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZV	-	LN6219D272PR	LVR-IC	LDO, 2.7V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZX	-	LN6219D282PR	LVR-IC	LDO, 2.8V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZY	-	LN6219D292PR	LVR-IC	LDO, 2.9V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
XZZ	-	LN6219D302PR	LVR-IC	LDO, 3.0V±2%, 240mA, -CE	SOT-89-5	32um	VR4	6h	Inw
Y01B	-	RP170H121B5	LVR-IC	LDO, 1.25V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y01D	-	RP170H121D5	LVR-IC	LDO, 1.25V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y02B	-	RP170H181B5	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y02D	-	RP170H181D5	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y03B	-	RP170H281B5	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y03D	-	RP170H281D5	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y12B	-	RP170H121B	LVR-IC	LDO, 1.2V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y12D	-	RP170H121D	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y13B	-	RP170H131B	LVR-IC	LDO, 1.3V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y13D	-	RP170H131D	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y14B	-	RP170H141B	LVR-IC	LDO, 1.4V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y14D	-	RP170H141D	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y15B	-	RP170H151B	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y15D	-	RP170H151D	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y16B	-	RP170H161B	LVR-IC	LDO, 1.6V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y16D	-	RP170H161D	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Y17B	-	RP170H171B	LVR-IC	LDO, 1.7V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y17D	-	RP170H171D	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y18B	-	RP170H181B	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y18D	-	RP170H181D	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y19B	-	RP170H191B	LVR-IC	LDO, 1.9V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y19D	-	RP170H191D	LVR-IC	LDO, 1.9V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y20	kb	XC6381E201P	DC-DC-IC	PFM step-up, 2.0V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y20B	-	RP170H201B	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y20D	-	RP170H201D	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y21	kb	XC6381E211P	DC-DC-IC	PFM step-up, 2.1V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y21B	-	RP170H211B	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y21D	-	RP170H211D	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y22	kb	XC6381E221P	DC-DC-IC	PFM step-up, 2.2V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y22B	-	RP170H221B	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y22D	-	RP170H221D	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y23	kb	XC6381E231P	DC-DC-IC	PFM step-up, 2.3V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y23B	-	RP170H231B	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y23D	-	RP170H231D	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y24	kb	XC6381E241P	DC-DC-IC	PFM step-up, 2.4V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y24B	-	RP170H241B	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y24D	-	RP170H241D	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y25	kb	XC6381E251P	DC-DC-IC	PFM step-up, 2.5V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y25B	-	RP170H251B	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y25D	-	RP170H251D	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y26	kb	XC6381E261P	DC-DC-IC	PFM step-up, 2.6V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y26B	-	RP170H261B	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y26D	-	RP170H261D	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y27	kb	XC6381E271P	DC-DC-IC	PFM step-up, 2.7V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y27B	-	RP170H271B	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y27D	-	RP170H271D	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y28	kb	XC6381E281P	DC-DC-IC	PFM step-up, 2.8V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y28B	-	RP170H281B	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y28D	-	RP170H281D	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y29	kb	XC6381E291P	DC-DC-IC	PFM step-up, 2.9V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y29B	-	RP170H291B	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y29D	-	RP170H291D	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y30	kb	XC6381E301P	DC-DC-IC	PFM step-up, 3.0V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y30B	-	RP170H301B	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y30D	-	RP170H301D	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y31	kb	XC6381E311P	DC-DC-IC	PFM step-up, 3.1V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y31B	-	RP170H311B	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y31D	-	RP170H311D	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y32	kb	XC6381E321P	DC-DC-IC	PFM step-up, 3.2V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y32B	-	RP170H321B	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y32D	-	RP170H321D	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y33	kb	XC6381E331P	DC-DC-IC	PFM step-up, 3.3V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y33B	-	RP170H331B	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y33D	-	RP170H331D	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y34	kb	XC6381E341P	DC-DC-IC	PFM step-up, 3.4V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y34B	-	RP170H341B	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y34D	-	RP170H341D	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y35	kb	XC6381E351P	DC-DC-IC	PFM step-up, 3.5V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y35B	-	RP170H351B	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y35D	-	RP170H351D	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y36	kb	XC6381E361P	DC-DC-IC	PFM step-up, 3.6V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y36B	-	RP170H361B	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y36D	-	RP170H361D	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y37	kb	XC6381E371P	DC-DC-IC	PFM step-up, 3.7V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y37B	-	RP170H371B	LVR-IC	LDO, 3.7V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y37D	-	RP170H371D	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y38	kb	XC6381E381P	DC-DC-IC	PFM step-up, 3.8V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y38B	-	RP170H381B	LVR-IC	LDO, 3.8V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y38D	-	RP170H381D	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y39	kb	XC6381E391P	DC-DC-IC	PFM step-up, 3.9V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y39B	-	RP170H391B	LVR-IC	LDO, 3.9V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y39D	-	RP170H391D	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y40	kb	XC6381E401P	DC-DC-IC	PFM step-up, 4.0V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y40B	-	RP170H401B	LVR-IC	LDO, 4.0V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y40D	-	RP170H401D	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y41	kb	XC6381E411P	DC-DC-IC	PFM step-up, 4.1V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Y41B	-	RP170H411B	LVR-IC	LDO, 4.1V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y41D	-	RP170H411D	LVR-IC	LDO, 4.1V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y42	kb	XC6381E421P	DC-DC-IC	PFM step-up, 4.2V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y42B	-	RP170H421B	LVR-IC	LDO, 4.2V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y42D	-	RP170H421D	LVR-IC	LDO, 4.2V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y43	kb	XC6381E431P	DC-DC-IC	PFM step-up, 4.3V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y43B	-	RP170H431B	LVR-IC	LDO, 4.3V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y43D	-	RP170H431D	LVR-IC	LDO, 4.3V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y44	kb	XC6381E441P	DC-DC-IC	PFM step-up, 4.4V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y44B	-	RP170H441B	LVR-IC	LDO, 4.4V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y44D	-	RP170H441D	LVR-IC	LDO, 4.4V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y45	kb	XC6381E451P	DC-DC-IC	PFM step-up, 4.5V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y45B	-	RP170H451B	LVR-IC	LDO, 4.5V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y45D	-	RP170H451D	LVR-IC	LDO, 4.5V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y46	kb	XC6381E461P	DC-DC-IC	PFM step-up, 4.6V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y46B	-	RP170H461B	LVR-IC	LDO, 4.6V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y46D	-	RP170H461D	LVR-IC	LDO, 4.6V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y47	kb	XC6381E471P	DC-DC-IC	PFM step-up, 4.7V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y47B	-	RP170H471B	LVR-IC	LDO, 4.7V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y47D	-	RP170H471D	LVR-IC	LDO, 4.7V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y48	kb	XC6381E481P	DC-DC-IC	PFM step-up, 4.8V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y48B	-	RP170H481B	LVR-IC	LDO, 4.8V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y48D	-	RP170H481D	LVR-IC	LDO, 4.8V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y49	kb	XC6381E491P	DC-DC-IC	PFM step-up, 4.9V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y49B	-	RP170H491B	LVR-IC	LDO, 4.9V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y49D	-	RP170H491D	LVR-IC	LDO, 4.9V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y50	kb	XC6381E501P	DC-DC-IC	PFM step-up, 5.0V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y50B	-	RP170H501B	LVR-IC	LDO, 5.0V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y50D	-	RP170H501D	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y51	kb	XC6381E511P	DC-DC-IC	PFM step-up, 5.1V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y51B	-	RP170H511B	LVR-IC	LDO, 5.1V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y51D	-	RP170H511D	LVR-IC	LDO, 5.1V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y52	kb	XC6381E521P	DC-DC-IC	PFM step-up, 5.2V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y52B	-	RP170H521B	LVR-IC	LDO, 5.2V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y52D	-	RP170H521D	LVR-IC	LDO, 5.2V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y53	kb	XC6381E531P	DC-DC-IC	PFM step-up, 5.3V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y53B	-	RP170H531B	LVR-IC	LDO, 5.3V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y53D	-	RP170H531D	LVR-IC	LDO, 5.3V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y54	kb	XC6381E541P	DC-DC-IC	PFM step-up, 5.4V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y54B	-	RP170H541B	LVR-IC	LDO, 5.4V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y54D	-	RP170H541D	LVR-IC	LDO, 5.4V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y55	kb	XC6381E551P	DC-DC-IC	PFM step-up, 5.5V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y55B	-	RP170H551B	LVR-IC	LDO, 5.5V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y55D	-	RP170H551D	LVR-IC	LDO, 5.5V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y56	kb	XC6381E561P	DC-DC-IC	PFM step-up, 5.6V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y56B	-	RP170H561B	LVR-IC	LDO, 5.6V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y56D	-	RP170H561D	LVR-IC	LDO, 5.6V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y57	kb	XC6381E571P	DC-DC-IC	PFM step-up, 5.7V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y57B	-	RP170H571B	LVR-IC	LDO, 5.7V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y57D	-	RP170H571D	LVR-IC	LDO, 5.7V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y58	kb	XC6381E581P	DC-DC-IC	PFM step-up, 5.8V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y58B	-	RP170H581B	LVR-IC	LDO, 5.8V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y58D	-	RP170H581D	LVR-IC	LDO, 5.8V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y59	kb	XC6381E591P	DC-DC-IC	PFM step-up, 5.9V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y59B	-	RP170H591B	LVR-IC	LDO, 5.9V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y59D	-	RP170H591D	LVR-IC	LDO, 5.9V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y60	kb	XC6381E601P	DC-DC-IC	PFM step-up, 6.0V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y60B	-	RP170H601B	LVR-IC	LDO, 6.0V±1%, 300mA, +CE	SOT-89-5	32vrq	VR4	6h	Ric
Y60D	-	RP170H601D	LVR-IC	LDO, 6.0V±1%, 300mA, +CE, CL	SOT-89-5	32vrq	VR4	6h	Ric
Y61	kb	XC6381E611P	DC-DC-IC	PFM step-up, 6.1V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y62	kb	XC6381E621P	DC-DC-IC	PFM step-up, 6.2V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y63	kb	XC6381E631P	DC-DC-IC	PFM step-up, 6.3V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y64	kb	XC6381E641P	DC-DC-IC	PFM step-up, 6.4V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y65	kb	XC6381E651P	DC-DC-IC	PFM step-up, 6.5V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y66	kb	XC6381E661P	DC-DC-IC	PFM step-up, 6.6V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y67	kb	XC6381E671P	DC-DC-IC	PFM step-up, 6.7V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y68	kb	XC6381E681P	DC-DC-IC	PFM step-up, 6.8V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y69	kb	XC6381E691P	DC-DC-IC	PFM step-up, 6.9V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor
Y70	kb	XC6381E701P	DC-DC-IC	PFM step-up, 7.0V±2.5%, 400mA, 155kHz, int. Vdd	SOT-89-5	32gc	DC4	6u	Tor



SECTION 9

6 and more pin case SMD semiconductor components





0
1
2
3
4
5
6
7
8
9
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
+AAAA	-	MAX9718AEUB+	Lin-IC	AF PA, BTL, 2.7..5.5V 1.4W(5V/4Ω), select shutdown	SOP-10	60	AFP19	8d	Max
+AAAB	-	MAX9718BEUB+	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	SOP-10	60	AFP20	8d	Max
+AAAC	-	MAX9718CEUB+	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	SOP-10	60	AFP20	8d	Max
+AAAD	-	MAX9718DEUB+	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	SOP-10	60	AFP20	8d	Max
+AAAJ	-	MAX9718EEUB+	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	SOP-10	60	AFP20	8d	Max
+AAAK	-	MAX9718FEUB+	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	SOP-10	60	AFP20	8d	Max
+AAAL	-	MAX9718GEUB+	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	SOP-10	60	AFP20	8d	Max
+AAAM	-	MAX9718HEUB+	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	SOP-10	60	AFP20	8d	Max
+ACLW	-	MAX16052AUT+T	Vdet-IC	Adjustable sequencing/supervisory, 2.25..16V, ODO	SOT-23-6	33	-	7b	Max
+ACLX	-	MAX16053AUT+T	Vdet-IC	Adjustable sequencing/supervisory, 2.25..16V, PPO	SOT-23-6	33	-	7b	Max
00	-	KIC7W00FK	CMOS-Log	Dual 2-input NAND gates	US8	47	Log50	8c	Kec
00	-	XC74WL00AASR	CMOS-Log	Dual 2-input NAND gates	MSOP-8B	a6	Log50	8d	Tor
005	-	FAN7005MU	Lin-IC	AF PA, 2.7..5.5V, 2x300mW(5V/8Ω), shutdown	SSOP-8	47	AFP17	8d	F
00B	-	U74HC2G02-SM1	CMOS-Log	Dual 2-input NOR gates	MSOP-8	47	Log53	8d	Utc
00BL	-	U74HC2G02L-SM1	CMOS-Log	Dual 2-input NOR gates	MSOP-8	47	Log53	8d	Utc
00W	-	U74HC2G00-SM1	CMOS-Log	Dual 2-input NAND gates	MSOP-8	47	Log50	8d	Utc
00WL	-	U74HC2G00L-SM1	CMOS-Log	Dual 2-input NAND gates	MSOP-8	47	Log50	8d	Utc
011	-	EC49222-1-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
011	-	GS6202RQRF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
012	-	EC49222-2-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
012	-	GS6202RFQF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
013	-	EC49222-3-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
013	-	GS6202RQQF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
014	-	EC49222-4-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01A	-	EC49222-A-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01A	-	GS6202RRRF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01B	-	EC49222-B-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01B	-	GS6202RJRF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01C	-	EC49222-C-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01C	-	GS6202RHRF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01C25A	-	XC9101C25ASR	DC-DC-IC	PWM, step-up, 2.5V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C26A	-	XC9101C26ASR	DC-DC-IC	PWM, step-up, 2.6V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C27A	-	XC9101C27ASR	DC-DC-IC	PWM, step-up, 2.7V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C28A	-	XC9101C28ASR	DC-DC-IC	PWM, step-up, 2.8V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C29A	-	XC9101C29ASR	DC-DC-IC	PWM, step-up, 2.9V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C30A	-	XC9101C30ASR	DC-DC-IC	PWM, step-up, 3.0V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C31A	-	XC9101C31ASR	DC-DC-IC	PWM, step-up, 3.1V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C32A	-	XC9101C32ASR	DC-DC-IC	PWM, step-up, 3.2V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C33A	-	XC9101C33ASR	DC-DC-IC	PWM, step-up, 3.3V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C34A	-	XC9101C34ASR	DC-DC-IC	PWM, step-up, 3.4V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C35A	-	XC9101C35ASR	DC-DC-IC	PWM, step-up, 3.5V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C36A	-	XC9101C36ASR	DC-DC-IC	PWM, step-up, 3.6V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C37A	-	XC9101C37ASR	DC-DC-IC	PWM, step-up, 3.7V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C38A	-	XC9101C38ASR	DC-DC-IC	PWM, step-up, 3.8V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C39A	-	XC9101C39ASR	DC-DC-IC	PWM, step-up, 3.9V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C40A	-	XC9101C40ASR	DC-DC-IC	PWM, step-up, 4.0V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C41A	-	XC9101C41ASR	DC-DC-IC	PWM, step-up, 4.1V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C42A	-	XC9101C42ASR	DC-DC-IC	PWM, step-up, 4.2V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C43A	-	XC9101C43ASR	DC-DC-IC	PWM, step-up, 4.3V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C44A	-	XC9101C44ASR	DC-DC-IC	PWM, step-up, 4.4V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C45A	-	XC9101C45ASR	DC-DC-IC	PWM, step-up, 4.5V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C46A	-	XC9101C46ASR	DC-DC-IC	PWM, step-up, 4.6V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C47A	-	XC9101C47ASR	DC-DC-IC	PWM, step-up, 4.7V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C48A	-	XC9101C48ASR	DC-DC-IC	PWM, step-up, 4.8V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C49A	-	XC9101C49ASR	DC-DC-IC	PWM, step-up, 4.9V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C50A	-	XC9101C50ASR	DC-DC-IC	PWM, step-up, 5.0V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C51A	-	XC9101C51ASR	DC-DC-IC	PWM, step-up, 5.1V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C52A	-	XC9101C52ASR	DC-DC-IC	PWM, step-up, 5.2V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C53A	-	XC9101C53ASR	DC-DC-IC	PWM, step-up, 5.3V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C54A	-	XC9101C54ASR	DC-DC-IC	PWM, step-up, 5.4V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C55A	-	XC9101C55ASR	DC-DC-IC	PWM, step-up, 5.5V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C56A	-	XC9101C56ASR	DC-DC-IC	PWM, step-up, 5.6V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C57A	-	XC9101C57ASR	DC-DC-IC	PWM, step-up, 5.7V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C58A	-	XC9101C58ASR	DC-DC-IC	PWM, step-up, 5.8V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C59A	-	XC9101C59ASR	DC-DC-IC	PWM, step-up, 5.9V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C60A	-	XC9101C60ASR	DC-DC-IC	PWM, step-up, 6.0V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C61A	-	XC9101C61ASR	DC-DC-IC	PWM, step-up, 6.1V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C62A	-	XC9101C62ASR	DC-DC-IC	PWM, step-up, 6.2V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C63A	-	XC9101C63ASR	DC-DC-IC	PWM, step-up, 6.3V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C64A	-	XC9101C64ASR	DC-DC-IC	PWM, step-up, 6.4V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
01C65A	-	XC9101C65ASR	DC-DC-IC	PWM, step-up, 6.5V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C66A	-	XC9101C66ASR	DC-DC-IC	PWM, step-up, 6.6V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C67A	-	XC9101C67ASR	DC-DC-IC	PWM, step-up, 6.7V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C68A	-	XC9101C68ASR	DC-DC-IC	PWM, step-up, 6.8V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C69A	-	XC9101C69ASR	DC-DC-IC	PWM, step-up, 6.9V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C70A	-	XC9101C70ASR	DC-DC-IC	PWM, step-up, 7.0V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C71A	-	XC9101C71ASR	DC-DC-IC	PWM, step-up, 7.1V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C72A	-	XC9101C72ASR	DC-DC-IC	PWM, step-up, 7.2V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C73A	-	XC9101C73ASR	DC-DC-IC	PWM, step-up, 7.3V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C74A	-	XC9101C74ASR	DC-DC-IC	PWM, step-up, 7.4V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C75A	-	XC9101C75ASR	DC-DC-IC	PWM, step-up, 7.5V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C76A	-	XC9101C76ASR	DC-DC-IC	PWM, step-up, 7.6V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C77A	-	XC9101C77ASR	DC-DC-IC	PWM, step-up, 7.7V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C78A	-	XC9101C78ASR	DC-DC-IC	PWM, step-up, 7.8V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C79A	-	XC9101C79ASR	DC-DC-IC	PWM, step-up, 7.9V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C80A	-	XC9101C80ASR	DC-DC-IC	PWM, step-up, 8.0V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C81A	-	XC9101C81ASR	DC-DC-IC	PWM, step-up, 8.1V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C82A	-	XC9101C82ASR	DC-DC-IC	PWM, step-up, 8.2V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C83A	-	XC9101C83ASR	DC-DC-IC	PWM, step-up, 8.3V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C84A	-	XC9101C84ASR	DC-DC-IC	PWM, step-up, 8.4V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C85A	-	XC9101C85ASR	DC-DC-IC	PWM, step-up, 8.5V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C86A	-	XC9101C86ASR	DC-DC-IC	PWM, step-up, 8.6V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C87A	-	XC9101C87ASR	DC-DC-IC	PWM, step-up, 8.7V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C88A	-	XC9101C88ASR	DC-DC-IC	PWM, step-up, 8.8V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C89A	-	XC9101C89ASR	DC-DC-IC	PWM, step-up, 8.9V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C90A	-	XC9101C90ASR	DC-DC-IC	PWM, step-up, 9.0V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C91A	-	XC9101C91ASR	DC-DC-IC	PWM, step-up, 9.1V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C92A	-	XC9101C92ASR	DC-DC-IC	PWM, step-up, 9.2V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C93A	-	XC9101C93ASR	DC-DC-IC	PWM, step-up, 9.3V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C94A	-	XC9101C94ASR	DC-DC-IC	PWM, step-up, 9.4V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C95A	-	XC9101C95ASR	DC-DC-IC	PWM, step-up, 9.5V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C96A	-	XC9101C96ASR	DC-DC-IC	PWM, step-up, 9.6V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C97A	-	XC9101C97ASR	DC-DC-IC	PWM, step-up, 9.7V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C98A	-	XC9101C98ASR	DC-DC-IC	PWM, step-up, 9.8V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01C99A	-	XC9101C99ASR	DC-DC-IC	PWM, step-up, 9.9V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CA0A	-	XC9101CA0ASR	DC-DC-IC	PWM, step-up, 10.0V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CA1A	-	XC9101CA1ASR	DC-DC-IC	PWM, step-up, 10.1V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CA2A	-	XC9101CA2ASR	DC-DC-IC	PWM, step-up, 10.2V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CA3A	-	XC9101CA3ASR	DC-DC-IC	PWM, step-up, 10.3V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CA4A	-	XC9101CA4ASR	DC-DC-IC	PWM, step-up, 10.4V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CA5A	-	XC9101CA5ASR	DC-DC-IC	PWM, step-up, 10.5V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CA6A	-	XC9101CA6ASR	DC-DC-IC	PWM, step-up, 10.6V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CA7A	-	XC9101CA7ASR	DC-DC-IC	PWM, step-up, 10.7V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CA8A	-	XC9101CA8ASR	DC-DC-IC	PWM, step-up, 10.8V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CA9A	-	XC9101CA9ASR	DC-DC-IC	PWM, step-up, 10.9V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CB0A	-	XC9101CB0ASR	DC-DC-IC	PWM, step-up, 11.0V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CB1A	-	XC9101CB1ASR	DC-DC-IC	PWM, step-up, 11.1V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CB2A	-	XC9101CB2ASR	DC-DC-IC	PWM, step-up, 11.2V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CB3A	-	XC9101CB3ASR	DC-DC-IC	PWM, step-up, 11.3V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CB4A	-	XC9101CB4ASR	DC-DC-IC	PWM, step-up, 11.4V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CB5A	-	XC9101CB5ASR	DC-DC-IC	PWM, step-up, 11.5V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CB6A	-	XC9101CB6ASR	DC-DC-IC	PWM, step-up, 11.6V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CB7A	-	XC9101CB7ASR	DC-DC-IC	PWM, step-up, 11.7V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CB8A	-	XC9101CB8ASR	DC-DC-IC	PWM, step-up, 11.8V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CB9A	-	XC9101CB9ASR	DC-DC-IC	PWM, step-up, 11.9V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CC0A	-	XC9101CC0ASR	DC-DC-IC	PWM, step-up, 12.0V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CC1A	-	XC9101CC1ASR	DC-DC-IC	PWM, step-up, 12.1V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CC2A	-	XC9101CC2ASR	DC-DC-IC	PWM, step-up, 12.2V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CC3A	-	XC9101CC3ASR	DC-DC-IC	PWM, step-up, 12.3V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CC4A	-	XC9101CC4ASR	DC-DC-IC	PWM, step-up, 12.4V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CC5A	-	XC9101CC5ASR	DC-DC-IC	PWM, step-up, 12.5V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CC6A	-	XC9101CC6ASR	DC-DC-IC	PWM, step-up, 12.6V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CC7A	-	XC9101CC7ASR	DC-DC-IC	PWM, step-up, 12.7V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CC8A	-	XC9101CC8ASR	DC-DC-IC	PWM, step-up, 12.8V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CC9A	-	XC9101CC9ASR	DC-DC-IC	PWM, step-up, 12.9V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CD0A	-	XC9101CD0ASR	DC-DC-IC	PWM, step-up, 13.0V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CD1A	-	XC9101CD1ASR	DC-DC-IC	PWM, step-up, 13.1V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CD2A	-	XC9101CD2ASR	DC-DC-IC	PWM, step-up, 13.2V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CD3A	-	XC9101CD3ASR	DC-DC-IC	PWM, step-up, 13.3V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CD4A	-	XC9101CD4ASR	DC-DC-IC	PWM, step-up, 13.4V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
01CD5A	-	XC9101CD5ASR	DC-DC-IC	PWM, step-up, 13.5V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CD6A	-	XC9101CD6ASR	DC-DC-IC	PWM, step-up, 13.6V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CD7A	-	XC9101CD7ASR	DC-DC-IC	PWM, step-up, 13.7V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CD8A	-	XC9101CD8ASR	DC-DC-IC	PWM, step-up, 13.8V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CD9A	-	XC9101CD9ASR	DC-DC-IC	PWM, step-up, 13.9V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CE0A	-	XC9101CE0ASR	DC-DC-IC	PWM, step-up, 14.0V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CE1A	-	XC9101CE1ASR	DC-DC-IC	PWM, step-up, 14.1V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CE2A	-	XC9101CE2ASR	DC-DC-IC	PWM, step-up, 14.2V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CE3A	-	XC9101CE3ASR	DC-DC-IC	PWM, step-up, 14.3V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CE4A	-	XC9101CE4ASR	DC-DC-IC	PWM, step-up, 14.4V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CE5A	-	XC9101CE5ASR	DC-DC-IC	PWM, step-up, 14.5V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CE6A	-	XC9101CE6ASR	DC-DC-IC	PWM, step-up, 14.6V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CE7A	-	XC9101CE7ASR	DC-DC-IC	PWM, step-up, 14.7V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CE8A	-	XC9101CE8ASR	DC-DC-IC	PWM, step-up, 14.8V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CE9A	-	XC9101CE9ASR	DC-DC-IC	PWM, step-up, 14.9V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CF0A	-	XC9101CF0ASR	DC-DC-IC	PWM, step-up, 15.0V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CF1A	-	XC9101CF1ASR	DC-DC-IC	PWM, step-up, 15.1V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CF2A	-	XC9101CF2ASR	DC-DC-IC	PWM, step-up, 15.2V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CF3A	-	XC9101CF3ASR	DC-DC-IC	PWM, step-up, 15.3V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CF4A	-	XC9101CF4ASR	DC-DC-IC	PWM, step-up, 15.4V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CF5A	-	XC9101CF5ASR	DC-DC-IC	PWM, step-up, 15.5V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CF6A	-	XC9101CF6ASR	DC-DC-IC	PWM, step-up, 15.6V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CF7A	-	XC9101CF7ASR	DC-DC-IC	PWM, step-up, 15.7V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CF8A	-	XC9101CF8ASR	DC-DC-IC	PWM, step-up, 15.8V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CF9A	-	XC9101CF9ASR	DC-DC-IC	PWM, step-up, 15.9V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01CH0A	-	XC9101CH0ASR	DC-DC-IC	PWM, step-up, 16.0V±2.5%, 1.5A	SOP-8	xd	DC17	8g	Tor
01D	-	EC49222-D-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01D	-	GS6202RFRF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01E	-	EC49222-E-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01E	-	GS6202RGRF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01F	-	EC49222-F-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01F	-	GS6202RDRF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01G	-	EC49222-G-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01G	-	GS6202RJJF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01H	-	EC49222-H-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01H	-	GS6202RHJF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01J	-	EC49222-J-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01J	-	GS6202RFJF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01K	-	EC49222-K-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01K	-	GS6202RGJF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01L	-	EC49222-L-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01L	-	GS6202RDJF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01M	-	EC49222-M-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01M	-	GS6202RHHF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01N	-	EC49222-N-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01N	-	GS6202RFHF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01P	-	EC49222-P-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01P	-	GS6202RGHF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01Q	-	EC49222-Q-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01Q	-	GS6202RDHF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01R	-	EC49222-R-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01R	-	GS6202RFFF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01S	-	EC49222-S-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01S	-	GS6202RGFF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01T	-	EC49222-T-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01T	-	GS6202RDFF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01U	-	EC49222-U-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01U	-	GS6202RGGF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01V	-	EC49222-V-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01V	-	GS6202RDGF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
01W	-	EC49222-W-B3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Ecm
01W	-	GS6202R11F	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7b	Glo
024	-	FAN7024MU	Lin-IC	AF PA, BTL, 2.3..5.5V, 675mW(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	F
03B	-	U74HC2G32-SM1	CMOS-Log	Dual 2-input OR gates	MSOP-8	47	Log52	8d	Utc
03BL	-	U74HC2G32L-SM1	CMOS-Log	Dual 2-input OR gates	MSOP-8	47	Log52	8d	Utc
04	-	KIC7W04FK	CMOS-Log	Triple inverters	US8	47	Log56	8c	Kec
04	-	XC74WL04AASR	CMOS-Log	Triple inverters	MSOP-8B	a6	Log56	8d	Tor
05	-	R1163D151E	LVR-IC	LDO, 1.5V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
05	-	XC74WL02AASR	CMOS-Log	Dual 2-input NOR gates	MSOP-8B	a6	Log53	8d	Tor
05/05	hg	SMS05	TVS	Quad, Vrwm=5V, 24A, 350W(1ms)	SOT-23-6L	33	D14	7b	Smt





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
06	-	R1163D161E	LVR-IC	LDO, 1.6V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
07	-	R1163D171E	LVR-IC	LDO, 1.7V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
08	-	KIC7W08FK	CMOS-Log	Dual 2-input AND gates	US8	47	Log51	8c	Kec
08	-	R1163D181E	LVR-IC	LDO, 1.8V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
08	-	XC74WL08AASR	CMOS-Log	Dual 2-input AND gates	MSOP-8B	a6	Log51	8d	Tor
09	-	R1163D191E	LVR-IC	LDO, 1.9V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
0A	-	MUN5111DW	Si-pnp-Digi	Dual, Sw, 2x50V, 100mA, 400mW, R1/R2=10k/10k	SOT-363	33	TD4	7b	Mot
0A	-	R1161D281A5	LVR-IC	LDO, 2.85V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
0A	-	R5326N001B	LVR-IC	LDO, Dual out, Vout1/Vout2=2V/2V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0B	-	MUN5112DW	Si-pnp-Digi	Dual, Sw, 2x50V, 100mA, 400mW, R1/R2=22k/22k	SOT-363	33	TD4	7b	Mot
0B	-	R1161D101A	LVR-IC	LDO, 1.0V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
0B	-	R5326N002B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0C	-	MUN5113DW	Si-pnp-Digi	Dual, Sw, 2x50V, 100mA, 400mW, R1/R2=47k/47k	SOT-363	33	TD4	7b	Mot
0C	-	R1161D201A	LVR-IC	LDO, 2.0V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
0C	-	R5326N003B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0D	-	MUN5114DW	Si-pnp-Digi	Dual, Sw, 2x50V, 100mA, 400mW, R1/R2=10/47k	SOT-363	33	TD4	7b	Mot
0D	-	R1161D301A	LVR-IC	LDO, 3.0V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
0D	-	R5326N004B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0E	-	MUN5115DW	Si-pnp-Digi	Dual, Sw, 2x50V, 100mA, 400mW, R1=10k	SOT-363	33	TD4	7b	Mot
0E	-	R5326N005B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0F	-	MUN5116DW	Si-pnp-Digi	Dual, Sw, 2x50V, 100mA, 400mW, R1=4k7	SOT-363	33	TD4	7b	Mot
0F	-	R1161D101B	LVR-IC	LDO, 1.0V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
0F	-	R5326N006B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0G	-	MUN5130DW	Si-pnp-Digi	Dual, Sw, 2x50V, 100mA, 400mW, R1/R2=1k/1k0	SOT-363	33	TD4	7b	Mot
0G	-	R1161D201B	LVR-IC	LDO, 2.0V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
0G	-	R5326N007B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0H	-	MUN5131DW	Si-pnp-Digi	Dual, Sw, 2x50V, 100mA, 400mW, R1/R2=2k2/2k2	SOT-363	33	TD4	7b	Mot
0H	-	R1161D301B	LVR-IC	LDO, 3.0V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
0H	-	R5326N008B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0J	-	MUN5132DW	Si-pnp-Digi	Dual, Sw, 2x50V, 100mA, 400mW, R1/R2=4k/4k7	SOT-363	33	TD4	7b	Mot
0J	-	R1161D101D	LVR-IC	LDO, 1.0V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
0J	-	R5326N009B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0K	-	MUN5133DW	Si-pnp-Digi	Dual, Sw, 2x50V, 100mA, 400mW, R1/R2=4k7/47k	SOT-363	33	TD4	7b	Mot
0K	-	R5326N010B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0L	-	MUN5134DW	Si-pnp-Digi	Dual, Sw, 2x50V, 100mA, 400mW, R1/R2=22k/47k	SOT-363	33	TD4	7b	Mot
0L	-	R1161D201D	LVR-IC	LDO, 2.0V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
0L	-	R5326N011B	LVR-IC	LDO, Dual out, Vout1/Vout2=3V/3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0M	-	R1161D301D	LVR-IC	LDO, 3.0V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
0M	-	R5326N012B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0N	-	MUN5136DW	Si-pnp-Digi	Dual, Sw, 2x50V, 100mA, 400mW, R1/R2=100k/100k	SOT-363	33	TD4	7b	Mot
0N	-	R5326N013B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0P	-	MUN5137DW	Si-pnp-Digi	Dual, Sw, 2x50V, 100mA, 400mW, R1/R2=47k/22k	SOT-363	33	TD4	7b	Mot
0P	-	R5326N014B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0Q	-	R5326N015B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0R	-	R5326N016B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0S	-	R5326N017B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.1V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0T	-	R5326N018B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0U	-	R5326N019B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0V	-	R5326N020B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0W	-	R5326N021B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0X	-	R5326N022B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0Y	-	R5326N023B	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.1V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
0Z	-	R5326N024B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
10	-	R1163D201E	LVR-IC	LDO, 2.0V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
10.	-	MA3A100	Z-diode	Triple, 9.4..10.6V, 70mA, Zzt=8Ω, 100mW,	SOP-6	33bb	-	7b	Pan
101	-	XC6415AA01MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/2.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
102	-	XC6415AA02MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/2.90V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
103	-	XC6415AA03MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/1.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
104	-	XC6415AA04MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.70V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
105	-	FC105	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/47k	SOT-363	33	TD4	7b	San
105	-	XC6415AA05MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/2.85V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
106	-	FC106	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 200MHz, R1/R2=47k/47k	SOT-363	33	TD3	7b	San
106	-	XC6415AA06MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/3.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
107	-	XC6415AA07MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/3.00V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
108	-	XC6415AA08MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/1.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
109	-	XC6415AA09MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/1.20V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
10N02Z	-	MMSF10N02Z	n-MOSFET	V-MOS, LogL, 20V, 7A, 2.5W, <16mΩ(5A), 65/325ns	SOP-8	47fs	-	8d	Ons
11	-	MUN5311DW	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SOT-363	33	TD2	7b	Mot
11	-	R1163D211E	LVR-IC	LDO, 2.1V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
110	-	XC6415AA10MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.10/1.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
111	-	XC6415AA11MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.30/1.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
112	-	XC6415AA12MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/2.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
113	-	XC6415AA13MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/3.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
114	-	XC6415AA14MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/3.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
115	-	XC6415AA15MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/1.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
116	-	XC6415AA16MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/3.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1166	-	LT1166CS8	Lin-IC	Dual AF voltage amplifier (60W AF PA driver)	SOP-8	47	-	8d	Ltc
117	-	XC6415AA17MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/3.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
118	-	XC6415AA18MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.10/3.10V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
119	-	XC6415AA19MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/1.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
12	-	MUN5312DW	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SOT-363	33	TD2	7b	Mot
12	-	R1163D221E	LVR-IC	LDO, 2.2V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
12/12	hj	SMS12	TVS	Quad, Vrwm=12V, 15A, 350W(1ms)	SOT-23-6L	33	D14	7b	Smt
120	-	XC6415AA20MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.30/2.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
121	-	XC6415AA21MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
122	-	XC6415AA22MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/3.00V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
123	-	XC6415AA23MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85/2.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
124	-	XC6415AA24MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85/3.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
125	-	KIC7W125FK	CMOS-Log	Dual bus buffer with 3-state output	US8	47	Log54	8c	Kec
125	-	XC6415AA25MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.60/2.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
125	-	XC74WL125AASR	CMOS-Log	Dual bus buffer with 3-state output	MSOP-8B	a6	Log54	8d	Tor
126	-	KIC7W126FK	CMOS-Log	Dual bus buffer with 3-state output	US8	47	Log55	8c	Kec
126	-	XC6415AA26MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/1.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
126	-	XC74WL126AASR	CMOS-Log	Dual bus buffer with 3-state output	MSOP-8B	a6	Log55	8d	Tor
127	-	XC6415AA27MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.00/3.00V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
128	-	XC6415AA28MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/1.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
129	-	XC6415AA29MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/1.75V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
12A	-	MMQA12V	TVS	Quad, Vrwm=12V, 24W(1ms)	SC-74	33	D14	7b	Ons
13	-	BC847BVN	Si-n/p	Dual, GP, 50V, 100mA, 200mW, B=200..450, >100MHz	SOT-666	35	T8	7b	Phi
13	-	MUN5313DW	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SOT-363	33	TD2	7b	Mot
13	-	R1163D231E	LVR-IC	LDO, 2.3V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
130	-	XC6415AA30MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.10/4.10V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
131	-	XC6415AA31MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/2.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
132	-	XC6415AA32MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/1.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
133	-	XC6415AA33MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/3.00V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
134	-	XC6415AA34MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/3.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
135	-	XC6415AA35MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.60V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
136	-	XC6415AA36MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.00/2.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
137	-	XC6415AA37MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/4.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
138	-	XC6415AA38MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/2.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
139	-	XC6415AA39MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/2.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
13A	-	MMQA13V1	TVS	Quad, Vrwm=13V, 24W(1ms)	SC-74	33	D14	7b	Ons
13A	-	TK74013L	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
13F	-	BC847BPDW	Si-n/p	Dual, GP, 50V, 100mA, 250mW, B=200..450, >100MHz	SOT-363	33	T9	7b	Ons
13G	-	BC847CPDW	Si-n/p	Dual, GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-363	33	T9	7b	Ons
13K	-	BC848BPDW	Si-n/p	Dual, GP, 30V, 100mA, 250mW, B=200..450, >100MHz	SOT-363	33	T9	7b	Ons
13L	-	BC848CPDW	Si-n/p	Dual, GP, 30V, 100mA, 250mW, B=420..800, >100MHz	SOT-363	33	T9	7b	Ons
13P	-	TK11213BM	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
13t	-	BC847BPN	Si-n/p	Dual, GP, 50V, 100mA, 200mW, B=200..450, >100MHz	SOT-363	33	T9	7b	Phi
14	-	KIC7W14FK	CMOS-Log	Triple Schmitt-trigger inverters	US8	47	Log57	8c	Kec
14	-	MUN5314DW	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10/47k	SOT-363	33	TD2	7b	Mot
14	-	R1163D241E	LVR-IC	LDO, 2.4V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
14	-	XC74WL14AASR	CMOS-Log	Triple Schmitt-trigger inverters	MSOP-8B	a6	Log57	8d	Tor
140	-	XC6415AA40MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/2.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
141	-	XC6415AA41MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/3.00V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
142	-	XC6415AA42MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.90/1.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
143	-	XC6415AA43MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/1.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
144	-	XC6415AA44MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/1.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
145	-	XC6415AA45MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/2.85V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
146	-	XC6415AA46MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/1.20V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1460A1	-	LT1460ACS8-10	Vref-IC	µPower, Precision, Series, 10V±0.075%	S8	47af	VR1	8d	Ltc
1460A2	-	LT1460ACS8-2.5	Vref-IC	µPower, Precision, Series, 2.5V±0.075%	S8	47af	VR1	8d	Ltc
1460A5	-	LT1460ACS8-5	Vref-IC	µPower, Precision, Series, 5.0V±0.075%	S8	47af	VR1	8d	Ltc
1460D1	-	LT1460DCS8-10	Vref-IC	µPower, Precision, Series, 10V±0.075%	S8	47af	VR1	8d	Ltc
1460D2	-	LT1460DCS8-2.5	Vref-IC	µPower, Precision, Series, 2.5V±0.075%	S8	47af	VR1	8d	Ltc
1460D5	-	LT1460DCS8-5	Vref-IC	µPower, Precision, Series, 5.0V±0.075%	S8	47af	VR1	8d	Ltc
147	-	XC6415AA47MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/1.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
148	-	XC6415AA48MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.20/3.20V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
149	-	XC6415AA49MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/3.00V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
14A	-	TK74014L	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
14P	-	TK11214BM	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
15	-	MUN5315DW	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	SOT-363	33	TD2	7b	Mot
15	-	R1163D251E	LVR-IC	LDO, 2.5V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
15/15	hi	SMS15	TVS	Quad, Vrwm=5V, 12A, 350W(1ms)	SOT-23-6L	33	D14	7b	Smt
150	-	XC6415AA50MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.60/2.85V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
151	-	S-13D1C2J2J-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, +CE, CL, PDR, Delay	HSNT-6	35x4	VR19	7g	Sii
151	-	S-13D1C2J2J-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, +CE, CL, PDR, Delay	SOT-23-6	33x5	VR19	7d	Sii
151	-	XC6415AA51MR	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.1V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1515G	-	LR31515BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1516G	-	LR31516BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1517G	-	LR31517BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1518G	-	LR31518BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1519G	-	LR31519BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
152	-	S-13D1C1833-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.0%, 150mA, +CE, CL, PDR, Delay	HSNT-6	35x4	VR19	7g	Sii
152	-	S-13D1C1833-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.0%, 150mA, +CE, CL, PDR, Delay	SOT-23-6	33x5	VR19	7d	Sii
152	-	XC6415AA52MR	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.6V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1520G	-	LR31520BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1521G	-	LR31521BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1522G	-	LR31522BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1523G	-	LR31523BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1524G	-	LR31524BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1525G	-	LR31525BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1526G	-	LR31526BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1527G	-	LR31527BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1528G	-	LR31528BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1529G	-	LR31529BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
153	-	S-13D1C1528-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1.0%, 150mA, +CE, CL, PDR, Delay	HSNT-6	35x4	VR19	7g	Sii
153	-	S-13D1C1528-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1.0%, 150mA, +CE, CL, PDR, Delay	SOT-23-6	33x5	VR19	7d	Sii
153	-	XC6415AA53MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/1.20V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1530G	-	LR31530BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1531G	-	LR31531BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1532G	-	LR31532BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1533G	-	LR31533BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
154	-	XC6415AA54MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.60/3.00V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
155	-	XC6415AA55MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.60/2.60V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
156	-	XC6415AA56MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/2.60V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
157	-	XC6415AA57MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.60/3.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
158	-	XC6415AA58MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/2.90V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
159	-	XC6415AA59MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/2.70V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
15A	-	MMQA15V	TVS	Quad, Vrwm=15V, 24W(1ms)	SC-74	33	D14	7b	Ons
15A	-	S-13D1B3018-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1.0%, 150mA, +CE, CL, PDR	HSNT-6	35x4	VR19	7g	Sii
15A	-	S-13D1B3018-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33x5	VR19	7d	Sii
15A	-	TK74015L	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
15B	-	S-13D1B3333-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1.0%, 150mA, +CE, CL, PDR	HSNT-6	35x4	VR19	7g	Sii
15B	-	S-13D1B3333-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33x5	VR19	7d	Sii
15C	-	S-13D1B3330-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1.0%, 150mA, +CE, CL, PDR	HSNT-6	35x4	VR19	7g	Sii
15C	-	S-13D1B3330-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33x5	VR19	7d	Sii
15D	-	S-13D1B3130-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±1.0%, 150mA, +CE, CL, PDR	HSNT-6	35x4	VR19	7g	Sii
15D	-	S-13D1B3130-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.0V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33x5	VR19	7d	Sii
15F	-	S-13D1B2818-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 150mA, +CE, CL, PDR	HSNT-6	35x4	VR19	7g	Sii
15F	-	S-13D1B2818-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33x5	VR19	7d	Sii
15G	-	S-13D1B1812-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±1.0%, 150mA, +CE, CL, PDR	HSNT-6	35x4	VR19	7g	Sii
15G	-	S-13D1B1812-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33x5	VR19	7d	Sii
15H	-	S-13D1B1815-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1.0%, 150mA, +CE, CL, PDR	HSNT-6	35x4	VR19	7g	Sii
15H	-	S-13D1B1815-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33x5	VR19	7d	Sii
15J	-	S-13D1B2518-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1.0%, 150mA, +CE, CL, PDR	HSNT-6	35x4	VR19	7g	Sii
15J	-	S-13D1B2518-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33x5	VR19	7d	Sii
15K	-	S-13D1B1218-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1.0%, 150mA, +CE, CL, PDR	HSNT-6	35x4	VR19	7g	Sii
15K	-	S-13D1B1218-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33x5	VR19	7d	Sii
15L	-	S-13D1B1818-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1.0%, 150mA, +CE, CL, PDR	HSNT-6	35x4	VR19	7g	Sii
15L	-	S-13D1B1818-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33x5	VR19	7d	Sii
15N	-	S-13D1B1828-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, +CE, CL, PDR	HSNT-6	35x4	VR19	7g	Sii
15N	-	S-13D1B1828-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33x5	VR19	7d	Sii
15O	-	S-13D1B2828-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 150mA, +CE, CL, PDR	HSNT-6	35x4	VR19	7g	Sii
15O	-	S-13D1B2828-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33x5	VR19	7d	Sii
15P	-	S-13D1B2833-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 150mA, +CE, CL, PDR	HSNT-6	35x4	VR19	7g	Sii
15P	-	S-13D1B2833-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33x5	VR19	7d	Sii
15P	-	TK11215BM	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
15Q	-	S-13D1B2J2J-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, +CE, CL, PDR	HSNT-6	35x4	VR19	7g	Sii
15Q	-	S-13D1B2J2J-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33x5	VR19	7d	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
15S	-	S-13D1C3636-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±1.0%, 150mA, +CE, CL, PDR, Delay	HSNT-6	35x4	VR19	7g	Sii
15S	-	S-13D1C3636-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±1.0%, 150mA, +CE, CL, PDR, Delay	SOT-23-6	33x5	VR19	7d	Sii
15U	-	S-13D1C1218-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1.0%, 150mA, +CE, CL, PDR, Delay	HSNT-6	35x4	VR19	7g	Sii
15U	-	S-13D1C1218-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1.0%, 150mA, +CE, CL, PDR, Delay	SOT-23-6	33x5	VR19	7d	Sii
15V	-	S-13D1C1818-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1.0%, 150mA, +CE, CL, PDR, Delay	HSNT-6	35x4	VR19	7g	Sii
15V	-	S-13D1C1818-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1.0%, 150mA, +CE, CL, PDR, Delay	SOT-23-6	33x5	VR19	7d	Sii
15X	-	S-13D1C1828-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, +CE, CL, PDR, Delay	HSNT-6	35x4	VR19	7g	Sii
15X	-	S-13D1C1828-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, +CE, CL, PDR, Delay	SOT-23-6	33x5	VR19	7d	Sii
15Y	-	S-13D1C2828-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 150mA, +CE, CL, PDR, Delay	HSNT-6	35x4	VR19	7g	Sii
15Y	-	S-13D1C2828-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 150mA, +CE, CL, PDR, Delay	SOT-23-6	33x5	VR19	7d	Sii
15Z	-	S-13D1C2833-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 150mA, +CE, CL, PDR, Delay	HSNT-6	35x4	VR19	7g	Sii
15Z	-	S-13D1C2833-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 150mA, +CE, CL, PDR, Delay	SOT-23-6	33x5	VR19	7d	Sii
16	-	MUN5316DW	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4k7	SOT-363	33	TD2	7b	Mot
16	-	R1163D261E	LVR-IC	LDO, 2.6V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
16-	-	BAS16VY	Si-diode	Triple, Sw, Fast, 75V, 300mA, Vf<1.25V(150mA), <4ns, 2pF	SOT-363	33dd	-	7b	NxH
160	-	XC6415AA60MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.00/2.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
161	-	XC6415AA61MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/1.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1615G	-	LR31615BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1616G	-	LR31616BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1617G	-	LR31617BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1618G	-	LR31618BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1619G	-	LR31619BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
162	-	XC6415AA62MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.70/1.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1620G	-	LR31620BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1621G	-	LR31621BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1622G	-	LR31622BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1623G	-	LR31623BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1624G	-	LR31624BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1625G	-	LR31625BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1626G	-	LR31626BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1627G	-	LR31627BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1628G	-	LR31628BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1629G	-	LR31629BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
163	-	XC6415AA63MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/2.70V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1630G	-	LR31630BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1631G	-	LR31631BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1632G	-	LR31632BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1633G	-	LR31633BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
164	-	XC6415AA64MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/3.10V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1648	-	AIC1648CG	LDR-IC	1.2 MHz PWM White LED driver, OVP 4.2V	SOT-23-6	33sv	LD2	7b	Aic
1648P	-	AIC1648PG	LDR-IC	1.2 MHz PWM White LED driver, OVP 4.2V	SOT-23-6	33sv	LD2	7b	Aic
165	-	XC6415AA65MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/3.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
166	-	XC6415AA66MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/3.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
167	-	XC6415AA67MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/2.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
168	-	XC6415AA68MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/1.20V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
169	-	XC6415AA69MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.75/2.75V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
16A	-	S-13D1B1833-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.0%, 150mA, +CE, CL, PDR	HSNT-6	35x4	VR19	7g	Sii
16A	-	S-13D1B1833-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33x5	VR19	7d	Sii
16A	-	TK74016L	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
16B	-	S-13D1B1528-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1.0%, 150mA, +CE, CL, PDR	HSNT-6	35x4	VR19	7g	Sii
16B	-	S-13D1B1528-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33x5	VR19	7d	Sii
16p	-	BAS16VY	Si-diode	Triple, Sw, Fast, 75V, 300mA, Vf<1.25V(150mA), <4ns, 2pF	SOT-363	33dd	-	7b	NxH
16P	-	TK11216BM	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
16t	-	BAS16VY	Si-diode	Triple, Sw, Fast, 75V, 300mA, Vf<1.25V(150mA), <4ns, 2pF	SOT-363	33dd	-	7b	NxM
16T	-	TWG4148T-16WS	Si-diode	Triple, Sw, 100V, 150mA, Vf<1.25V(150mA), <4pF	SOT-363	33bb	-	7b	Ttr
16W	-	BAS16VY	Si-diode	Triple, Sw, Fast, 75V, 300mA, Vf<1.25V(150mA), <4ns, 2pF	SOT-363	33dd	-	7b	NxC
17	-	R1163D271E	LVR-IC	LDO, 2.7V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
170	-	XC6415AA70MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/2.90V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
171	-	XC6415AA71MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/2.95V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1715G	-	LR31715BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1716G	-	LR31716BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1717G	-	LR31717BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1718G	-	LR31718BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1719G	-	LR31719BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
172	-	XC6415AA72MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/3.05V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1720G	-	LR31720BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1721G	-	LR31721BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1722G	-	LR31722BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1723G	-	LR31723BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1724G	-	LR31724BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1725G	-	LR31725BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1726G	-	LR31726BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1727G	-	LR31727BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1728G	-	LR31728BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1729G	-	LR31729BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
173	-	XC6415AA73MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.10/2.90V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1730G	-	LR31730BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1731G	-	LR31731BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1732G	-	LR31732BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1733G	-	LR31733BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
174	-	XC6415AA74MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.10/2.95V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
175	-	XC6415AA75MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.10/3.00V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
176	-	XC6415AA76MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.10/3.05V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
177	-	XC6415AA77MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/3.10V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
178	-	XC6415AA78MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/2.60V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
179	-	XC6415AA79MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
17A	-	S-13D1D1218-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1.0%, 150mA, +CE	HSNT-6	35x4	VR19	7g	Sii
17A	-	S-13D1D1218-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1.0%, 150mA, +CE	SOT-23-6	33x5	VR19	7d	Sii
17A	-	TK74017L	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
17B	-	S-13D1D1818-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1.0%, 150mA, +CE	HSNT-6	35x4	VR19	7g	Sii
17B	-	S-13D1D1818-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8vV±1.0%, 150mA, +CE	SOT-23-6	33x5	VR19	7d	Sii
17C	-	BZX84C17TW	Z-diode	Triple, 16.66..17.34V, Zzt=40Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
17C	-	S-13D1D1828-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, +CE	HSNT-6	35x4	VR19	7g	Sii
17C	-	S-13D1D1828-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, +CE	SOT-23-6	33x5	VR19	7d	Sii
17D	-	S-13D1D2828-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 150mA, +CE	HSNT-6	35x4	VR19	7g	Sii
17D	-	S-13D1D2828-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 150mA, +CE	SOT-23-6	33x5	VR19	7d	Sii
17E	-	S-13D1D2833-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 150mA, +CE	HSNT-6	35x4	VR19	7g	Sii
17E	-	S-13D1D2833-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 150mA, +CE	SOT-23-6	33x5	VR19	7d	Sii
17F	-	S-13D1D2J2J-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, +CE	HSNT-6	35x4	VR19	7g	Sii
17F	-	S-13D1D2J2J-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, +CE	SOT-23-6	33x5	VR19	7d	Sii
17G	-	S-13D1D1833-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.0%, 150mA, +CE	HSNT-6	35x4	VR19	7g	Sii
17G	-	S-13D1D1833-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.0%, 150mA, +CE	SOT-23-6	33x5	VR19	7d	Sii
17H	-	S-13D1D1528-A6T2U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1.0%, 150mA, +CE	HSNT-6	35x4	VR19	7g	Sii
17H	-	S-13D1D1528-M6T1U3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1.0%, 150mA, +CE	SOT-23-6	33x5	VR19	7d	Sii
17P	-	TK11217BM	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
18	-	R1163D281E	LVR-IC	LDO, 2.8V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
180	-	XC6415AA80MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.10/1.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
181	-	XC6415AA81MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.00/3.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1815G	-	LR31815BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1816G	-	LR31816BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1817G	-	LR31817BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1818G	-	LR31818BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1819G	-	LR31819BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
182	-	XC6415AA82MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/2.00V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1820G	-	LR31820BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1821G	-	LR31821BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1822G	-	LR31822BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1823G	-	LR31823BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1824G	-	LR31824BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1825G	-	LR31825BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1826G	-	LR31826BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1827G	-	LR31827BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1828G	-	LR31828BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1829G	-	LR31829BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
183	-	XC6415AA83MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/1.20V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1830G	-	LR31830BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1831G	-	LR31831BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1832G	-	LR31832BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1833G	-	LR31833BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
184	-	XC6415AA84MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.00/3.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
185	-	XC6415AA85MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.70/2.70V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
186	-	XC6415AA86MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.70/3.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
187	-	XC6415AA87MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.90/2.90V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
188	-	XC6415AA88MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/2.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
189	-	XC6415AA89MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/3.00V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
18A	-	MMQA18V	TVS	Quad, Vrwm=18V, 24W(1ms)	SC-74	33	D14	7b	Ons
18A	-	TK74018L	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
18P	-	TK11218BM	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
19	-	R1163D291E	LVR-IC	LDO, 2.9V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
190	-	XC6415AA90MR	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.5V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
191	-	XC6415AA91MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.0V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1915G	-	LR31915BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1916G	-	LR31916BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1917G	-	LR31917BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1918G	-	LR31918BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1919G	-	LR31919BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
192	-	XC6415AA92MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/5.00V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1920G	-	LR31920BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1921G	-	LR31921BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1922G	-	LR31922BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1923G	-	LR31923BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1924G	-	LR31924BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1925G	-	LR31925BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1926G	-	LR31926BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1927G	-	LR31927BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1928G	-	LR31928BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1929G	-	LR31929BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
193	-	XC6415AA93MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/2.90V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1930G	-	LR31930BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1931G	-	LR31931BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1932G	-	LR31932BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
1933G	-	LR31933BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
194	-	XC6415AA94MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.10/1.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
195	-	XC6415AA95MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/1.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
196	-	XC6415AA96MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.00/1.20V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
197	-	XC6415AA97MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
198	-	XC6415AA98MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/0.90V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
199	-	XC6415AA99MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15/3.15V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
19A	-	TK74019L	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
19P	-	TK11219BM	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
1A	-	R1161D121A5	LVR-IC	LDO, 1.25V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
1A	-	R5326N001A	LVR-IC	LDO, Dual out, Vout1/Vout2=2V/2V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1A0	-	XC6415AAA0MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.10/1.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1A1	-	XC6415AAA1MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/2.00V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1A2	-	XC6415AAA2MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/1.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1A3	-	XC6415AAA3MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/2.60V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1A4	-	XC6415AAA4MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.25/2.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1A5	-	XC6415AAA5MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85/1.20V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1A6	-	XC6415AAA6MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/1.20V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1A7	-	XC6415AAA7MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/1.95V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1A8	-	XC6415AAA8MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/3.00V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1A8T	-	CMKZ5250B	Z-diode	Triple, 19.0..21.0V, Izt=6.2mA, Zzt=25Ω, 200mW	SOT-363	33dd	-	7b	Cen
1A9	-	XC6415AAA9MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.55/2.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1B	-	BC846BDW1	Si-npn	Dual, GP, 80V, 100mA, 200mW, B=200..450, >100MHz	SOT-363	33	T8	7b	Ons
1B	-	R1161D111A	LVR-IC	LDO, 1.1V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
1B	-	R5326N002A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1B0	-	XC6415AAB0MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.90/1.90V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1B1	-	XC6415AAB1MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/2.85V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1B2	-	XC6415AAB2MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/1.00V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1B3	-	XC6415AAB3MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.30/1.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1B4	-	XC6415AAB4MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.70/3.00V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1B5	-	XC6415AAB5MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/1.90V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1B6	-	XC6415AAB6MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/0.90V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1B7	-	XC6415AAB7MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15/2.85V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1B8	-	XC6415AAB8MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.60/1.30V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1B8T	-	CMKZ5251B	Z-diode	Triple, 20.90..23.10V, Izt=5.6mA, Zzt=29Ω, 200mW	SOT-363	33dd	-	7b	Cen
1B9	-	XC6415AAB9MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/2.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1Bs	-	BC817UPN	Si-n/p	Dual, AF-Drv, 50V, 500mA, 330mW, B=100..600, >200MHz	SOT-457	33	T9	7b	Sie
1C	-	R1161D211A	LVR-IC	LDO, 2.1V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
1C	-	R5326N003A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1C0	-	XC6415AAC0MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/1.10V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1C1	-	XC6415AAC1MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/2.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1C12A	-	XC9201C12AKR	DC-DC-IC	PWM, step-up, 1.2V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C13A	-	XC9201C13AKR	DC-DC-IC	PWM, step-up, 1.3V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C14A	-	XC9201C14AKR	DC-DC-IC	PWM, step-up, 1.4V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C15A	-	XC9201C15AKR	DC-DC-IC	PWM, step-up, 1.5V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C16A	-	XC9201C16AKR	DC-DC-IC	PWM, step-up, 1.6V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C17A	-	XC9201C17AKR	DC-DC-IC	PWM, step-up, 1.7V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C18A	-	XC9201C18AKR	DC-DC-IC	PWM, step-up, 1.8V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C19A	-	XC9201C19AKR	DC-DC-IC	PWM, step-up, 1.9V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1C2	-	XC6415AAC2MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85/2.85V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1C20A	-	XC9201C20AKR	DC-DC-IC	PWM, step-up, 2.0V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C21A	-	XC9201C21AKR	DC-DC-IC	PWM, step-up, 2.1V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C22A	-	XC9201C22AKR	DC-DC-IC	PWM, step-up, 2.2V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C23A	-	XC9201C23AKR	DC-DC-IC	PWM, step-up, 2.3V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C24A	-	XC9201C24AKR	DC-DC-IC	PWM, step-up, 2.4V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C25A	-	XC9201C25AKR	DC-DC-IC	PWM, step-up, 2.5V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C26A	-	XC9201C26AKR	DC-DC-IC	PWM, step-up, 2.6V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C27A	-	XC9201C27AKR	DC-DC-IC	PWM, step-up, 2.7V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C28A	-	XC9201C28AKR	DC-DC-IC	PWM, step-up, 2.8V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C29A	-	XC9201C29AKR	DC-DC-IC	PWM, step-up, 2.9V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C3	-	XC6415AAC3MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.90V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1C30A	-	XC9201C30AKR	DC-DC-IC	PWM, step-up, 3.0V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C31A	-	XC9201C31AKR	DC-DC-IC	PWM, step-up, 3.1V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C32A	-	XC9201C32AKR	DC-DC-IC	PWM, step-up, 3.2V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C33A	-	XC9201C33AKR	DC-DC-IC	PWM, step-up, 3.3V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C34A	-	XC9201C34AKR	DC-DC-IC	PWM, step-up, 3.4V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C35A	-	XC9201C35AKR	DC-DC-IC	PWM, step-up, 3.5V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C36A	-	XC9201C36AKR	DC-DC-IC	PWM, step-up, 3.6V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C37A	-	XC9201C37AKR	DC-DC-IC	PWM, step-up, 3.7V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C38A	-	XC9201C38AKR	DC-DC-IC	PWM, step-up, 3.8V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C39A	-	XC9201C39AKR	DC-DC-IC	PWM, step-up, 3.9V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C4	-	XC6415AAC4MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/3.20V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1C40A	-	XC9201C40AKR	DC-DC-IC	PWM, step-up, 4.0V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C41A	-	XC9201C41AKR	DC-DC-IC	PWM, step-up, 4.1V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C42A	-	XC9201C42AKR	DC-DC-IC	PWM, step-up, 4.2V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C43A	-	XC9201C43AKR	DC-DC-IC	PWM, step-up, 4.3V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C44A	-	XC9201C44AKR	DC-DC-IC	PWM, step-up, 4.4V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C45A	-	XC9201C45AKR	DC-DC-IC	PWM, step-up, 4.5V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C46A	-	XC9201C46AKR	DC-DC-IC	PWM, step-up, 4.6V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C47A	-	XC9201C47AKR	DC-DC-IC	PWM, step-up, 4.7V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C48A	-	XC9201C48AKR	DC-DC-IC	PWM, step-up, 4.8V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C49A	-	XC9201C49AKR	DC-DC-IC	PWM, step-up, 4.9V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C5	-	XC6415AAC5MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.00/2.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1C50A	-	XC9201C50AKR	DC-DC-IC	PWM, step-up, 5.0V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C51A	-	XC9201C51AKR	DC-DC-IC	PWM, step-up, 5.1V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C52A	-	XC9201C52AKR	DC-DC-IC	PWM, step-up, 5.2V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C53A	-	XC9201C53AKR	DC-DC-IC	PWM, step-up, 5.3V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C54A	-	XC9201C54AKR	DC-DC-IC	PWM, step-up, 5.4V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C55A	-	XC9201C55AKR	DC-DC-IC	PWM, step-up, 5.5V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C56A	-	XC9201C56AKR	DC-DC-IC	PWM, step-up, 5.6V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C57A	-	XC9201C57AKR	DC-DC-IC	PWM, step-up, 5.7V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C58A	-	XC9201C58AKR	DC-DC-IC	PWM, step-up, 5.8V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C59A	-	XC9201C59AKR	DC-DC-IC	PWM, step-up, 5.9V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C6	-	XC6415AAC6MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.10/2.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1C60A	-	XC9201C60AKR	DC-DC-IC	PWM, step-up, 6.0V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C61A	-	XC9201C61AKR	DC-DC-IC	PWM, step-up, 6.1V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C62A	-	XC9201C62AKR	DC-DC-IC	PWM, step-up, 6.2V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C63A	-	XC9201C63AKR	DC-DC-IC	PWM, step-up, 6.3V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C64A	-	XC9201C64AKR	DC-DC-IC	PWM, step-up, 6.4V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C65A	-	XC9201C65AKR	DC-DC-IC	PWM, step-up, 6.5V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C66A	-	XC9201C66AKR	DC-DC-IC	PWM, step-up, 6.6V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C67A	-	XC9201C67AKR	DC-DC-IC	PWM, step-up, 6.7V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C68A	-	XC9201C68AKR	DC-DC-IC	PWM, step-up, 6.8V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C69A	-	XC9201C69AKR	DC-DC-IC	PWM, step-up, 6.9V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C7	-	XC6415AAC7MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/3.60V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1C70A	-	XC9201C70AKR	DC-DC-IC	PWM, step-up, 7.0V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C71A	-	XC9201C71AKR	DC-DC-IC	PWM, step-up, 7.1V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C72A	-	XC9201C72AKR	DC-DC-IC	PWM, step-up, 7.2V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C73A	-	XC9201C73AKR	DC-DC-IC	PWM, step-up, 7.3V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C74A	-	XC9201C74AKR	DC-DC-IC	PWM, step-up, 7.4V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C75A	-	XC9201C75AKR	DC-DC-IC	PWM, step-up, 7.5V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C76A	-	XC9201C76AKR	DC-DC-IC	PWM, step-up, 7.6V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C77A	-	XC9201C77AKR	DC-DC-IC	PWM, step-up, 7.7V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C78A	-	XC9201C78AKR	DC-DC-IC	PWM, step-up, 7.8V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C79A	-	XC9201C79AKR	DC-DC-IC	PWM, step-up, 7.9V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C8	-	XC6415AAC8MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.30/3.00V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1C80A	-	XC9201C80AKR	DC-DC-IC	PWM, step-up, 8.0V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C81A	-	XC9201C81AKR	DC-DC-IC	PWM, step-up, 8.1V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C82A	-	XC9201C82AKR	DC-DC-IC	PWM, step-up, 8.2V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1C83A	-	XC9201C83AKR	DC-DC-IC	PWM, step-up, 8.3V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C84A	-	XC9201C84AKR	DC-DC-IC	PWM, step-up, 8.4V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C85A	-	XC9201C85AKR	DC-DC-IC	PWM, step-up, 8.5V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C86A	-	XC9201C86AKR	DC-DC-IC	PWM, step-up, 8.6V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C87A	-	XC9201C87AKR	DC-DC-IC	PWM, step-up, 8.7V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C88A	-	XC9201C88AKR	DC-DC-IC	PWM, step-up, 8.8V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C89A	-	XC9201C89AKR	DC-DC-IC	PWM, step-up, 8.9V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C8T	-	CMKZ5252B	Z-diode	Triple, 22.80..25.20V, Izt=5.2mA, Zzt=33Ω, 200mW	SOT-363	33dd	-	7b	Cen
1C9	-	XC6415AAC9MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.40V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1C90A	-	XC9201C90AKR	DC-DC-IC	PWM, step-up, 9.0V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C91A	-	XC9201C91AKR	DC-DC-IC	PWM, step-up, 9.1V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C92A	-	XC9201C92AKR	DC-DC-IC	PWM, step-up, 9.2V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C93A	-	XC9201C93AKR	DC-DC-IC	PWM, step-up, 9.3V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C94A	-	XC9201C94AKR	DC-DC-IC	PWM, step-up, 9.4V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C95A	-	XC9201C95AKR	DC-DC-IC	PWM, step-up, 9.5V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C96A	-	XC9201C96AKR	DC-DC-IC	PWM, step-up, 9.6V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C97A	-	XC9201C97AKR	DC-DC-IC	PWM, step-up, 9.7V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C98A	-	XC9201C98AKR	DC-DC-IC	PWM, step-up, 9.8V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1C99A	-	XC9201C99AKR	DC-DC-IC	PWM, step-up, 9.9V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CA0A	-	XC9201CA0AKR	DC-DC-IC	PWM, step-up, 10.0V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CA1A	-	XC9201CA1AKR	DC-DC-IC	PWM, step-up, 10.1V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CA2A	-	XC9201CA2AKR	DC-DC-IC	PWM, step-up, 10.2V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CA3A	-	XC9201CA3AKR	DC-DC-IC	PWM, step-up, 10.3V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CA4A	-	XC9201CA4AKR	DC-DC-IC	PWM, step-up, 10.4V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CA5A	-	XC9201CA5AKR	DC-DC-IC	PWM, step-up, 10.5V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CA6A	-	XC9201CA6AKR	DC-DC-IC	PWM, step-up, 10.6V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CA7A	-	XC9201CA7AKR	DC-DC-IC	PWM, step-up, 10.7V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CA8A	-	XC9201CA8AKR	DC-DC-IC	PWM, step-up, 10.8V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CA9A	-	XC9201CA9AKR	DC-DC-IC	PWM, step-up, 10.9V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CB0A	-	XC9201CB0AKR	DC-DC-IC	PWM, step-up, 11.0V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CB1A	-	XC9201CB1AKR	DC-DC-IC	PWM, step-up, 11.1V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CB2A	-	XC9201CB2AKR	DC-DC-IC	PWM, step-up, 11.2V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CB3A	-	XC9201CB3AKR	DC-DC-IC	PWM, step-up, 11.3V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CB4A	-	XC9201CB4AKR	DC-DC-IC	PWM, step-up, 11.4V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CB5A	-	XC9201CB5AKR	DC-DC-IC	PWM, step-up, 11.5V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CB6A	-	XC9201CB6AKR	DC-DC-IC	PWM, step-up, 11.6V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CB7A	-	XC9201CB7AKR	DC-DC-IC	PWM, step-up, 11.7V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CB8A	-	XC9201CB8AKR	DC-DC-IC	PWM, step-up, 11.8V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CB9A	-	XC9201CB9AKR	DC-DC-IC	PWM, step-up, 11.9V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CC0A	-	XC9201CC0AKR	DC-DC-IC	PWM, step-up, 12.0V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CC1A	-	XC9201CC1AKR	DC-DC-IC	PWM, step-up, 12.1V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CC2A	-	XC9201CC2AKR	DC-DC-IC	PWM, step-up, 12.2V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CC3A	-	XC9201CC3AKR	DC-DC-IC	PWM, step-up, 12.3V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CC4A	-	XC9201CC4AKR	DC-DC-IC	PWM, step-up, 12.4V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CC5A	-	XC9201CC5AKR	DC-DC-IC	PWM, step-up, 12.5V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CC6A	-	XC9201CC6AKR	DC-DC-IC	PWM, step-up, 12.6V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CC7A	-	XC9201CC7AKR	DC-DC-IC	PWM, step-up, 12.7V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CC8A	-	XC9201CC8AKR	DC-DC-IC	PWM, step-up, 12.8V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CC9A	-	XC9201CC9AKR	DC-DC-IC	PWM, step-up, 12.9V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CD0A	-	XC9201CD0AKR	DC-DC-IC	PWM, step-up, 13.0V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CD1A	-	XC9201CD1AKR	DC-DC-IC	PWM, step-up, 13.1V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CD2A	-	XC9201CD2AKR	DC-DC-IC	PWM, step-up, 13.2V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CD3A	-	XC9201CD3AKR	DC-DC-IC	PWM, step-up, 13.3V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CD4A	-	XC9201CD4AKR	DC-DC-IC	PWM, step-up, 13.4V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CD5A	-	XC9201CD5AKR	DC-DC-IC	PWM, step-up, 13.5V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CD6A	-	XC9201CD6AKR	DC-DC-IC	PWM, step-up, 13.6V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CD7A	-	XC9201CD7AKR	DC-DC-IC	PWM, step-up, 13.7V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CD8A	-	XC9201CD8AKR	DC-DC-IC	PWM, step-up, 13.8V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CD9A	-	XC9201CD9AKR	DC-DC-IC	PWM, step-up, 13.9V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CE0A	-	XC9201CE0AKR	DC-DC-IC	PWM, step-up, 14.0V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CE1A	-	XC9201CE1AKR	DC-DC-IC	PWM, step-up, 14.1V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CE2A	-	XC9201CE2AKR	DC-DC-IC	PWM, step-up, 14.2V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CE3A	-	XC9201CE3AKR	DC-DC-IC	PWM, step-up, 14.3V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CE4A	-	XC9201CE4AKR	DC-DC-IC	PWM, step-up, 14.4V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CE5A	-	XC9201CE5AKR	DC-DC-IC	PWM, step-up, 14.5V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CE6A	-	XC9201CE6AKR	DC-DC-IC	PWM, step-up, 14.6V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CE7A	-	XC9201CE7AKR	DC-DC-IC	PWM, step-up, 14.7V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CE8A	-	XC9201CE8AKR	DC-DC-IC	PWM, step-up, 14.8V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CE9A	-	XC9201CE9AKR	DC-DC-IC	PWM, step-up, 14.9V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CF0A	-	XC9201CF0AKR	DC-DC-IC	PWM, step-up, 15.0V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1CF1A	-	XC9201CF1AKR	DC-DC-IC	PWM, step-up, 15.1V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CF2A	-	XC9201CF2AKR	DC-DC-IC	PWM, step-up, 15.2V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CF3A	-	XC9201CF3AKR	DC-DC-IC	PWM, step-up, 15.3V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CF4A	-	XC9201CF4AKR	DC-DC-IC	PWM, step-up, 15.4V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CF5A	-	XC9201CF5AKR	DC-DC-IC	PWM, step-up, 15.5V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CF6A	-	XC9201CF6AKR	DC-DC-IC	PWM, step-up, 15.6V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CF7A	-	XC9201CF7AKR	DC-DC-IC	PWM, step-up, 15.7V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CF8A	-	XC9201CF8AKR	DC-DC-IC	PWM, step-up, 15.8V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CF9A	-	XC9201CF9AKR	DC-DC-IC	PWM, step-up, 15.9V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1CH0A	-	XC9201CH0AKR	DC-DC-IC	PWM, step-up, 16.0V±2.5%, 3A	MSOP-8A	xd	DC17	8f	Tor
1Cs	-	BC847S	Si-npn	Dual, GP, 50V, 100mA, 200mW, B>100, >100MHz	SOT-363	33	T8	7b	Sie
1D	-	R1161D311A	LVR-IC	LDO, 3.1V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
1D	-	R5326N004A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1D0	-	XC6415AAD0MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/3.60V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1D1	-	XC6415AAD1MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.00/2.85V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1D2	-	XC6415AAD2MR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/1.85V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1D3	-	XC6415AAD3MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.5V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1D4	-	XC6415AAD4MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/2.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1D5	-	XC6415AAD5MR	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.6V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1D6	-	XC6415AAD6MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.00/1.80V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1D7	-	XC6415AAD7MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/3.10V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1D8	-	XC6415AAD8MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.20/3.10V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1D8T	-	CMKZ5253B	Z-diode	Triple, 23.75..26.25V, Izt=5mA, Zzt=35Ω, 200mW	SOT-363	33dd	-	7b	Cen
1D9	-	XC6415AAD9MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1Ds	-	BC846S	Si-npn	Dual, GP, 80V, 100mA, 200mW, B>200, >100MHz	SOT-363	33	T8	7b	Sie
1Ds	-	BC846U	Si-npn	Dual, AF, 80V, 100mA, 250mW, B=110..450, >100MHz	SC-74	33	T8	7a	Sie
1E	-	R1161D121B5	LVR-IC	LDO, 1.25V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
1E	-	R5326N005A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1E0	-	XC6415AAE0MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.10/2.50V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1E1	-	XC6415AAE1MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/3.10V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1E2	-	XC6415AAE2MR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±1%, 200mA, +CE	SOT-26	x5	VR19	7d	Tor
1E8T	-	CMKZ5254B	Z-diode	Triple, 25.65..28.35V, Izt=4.6mA, Zzt=41Ω, 200mW	SOT-363	33dd	-	7b	Cen
1F	-	BC847BDW1	Si-npn	Dual, GP, 50V, 100mA, 200mW, B=200..450, >100MHz	SOT-363	33	T8	7b	Ons
1F	-	BC847BV	Si-npn	Dual, GP, 50V, 100mA, 200mW, B=200..450, >100MHz	SOT-666	35	T8	7b	Phi
1F	-	R1161D111B	LVR-IC	LDO, 1.1V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
1F	-	R5326N006A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1F8T	-	CMKZ5255B	Z-diode	Triple, 26.60..29.40V, Izt=4.5mA, Zzt=44Ω, 200mW	SOT-363	33dd	-	7b	Cen
1Ft	-	BC847BS	Si-npn	Dual, GP, 50V, 100mA, 200mW, B=200..450, >100MHz	SOT-363	33	T8	7b	Phi
1G	-	BC847CDW1	Si-npn	Dual, GP, 50V, 100mA, 200mW, B=420..800, >100MHz	SOT-363	33	T8	7b	Ons
1G	-	R1161D211B	LVR-IC	LDO, 2.1V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
1G	-	R5326N007A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1G8T	-	CMKZ5256B	Z-diode	Triple, 28.50..31.60V, Izt=4.2mA, Zzt=49Ω, 200mW	SOT-363	33dd	-	7b	Cen
1H	-	R1161D311B	LVR-IC	LDO, 3.1V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
1H	-	R5326N008A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1H8T	-	CMKZ5257B	Z-diode	Triple, 31.35..34.65V, Izt=3.8mA, Zzt=58Ω, 200mW	SOT-363	33dd	-	7b	Cen
1J	-	R1161D121D5	LVR-IC	LDO, 1.25V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
1J	-	R5326N009A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1J8T	-	CMKZ5258B	Z-diode	Triple, 34.20..37.80V, Izt=3.4mA, Zzt=70Ω, 200mW	SOT-363	33dd	-	7b	Cen
1K	-	BC848BDW1	Si-npn	Dual, GP, 30V, 100mA, 200mW, B=200..450, >100MHz	SOT-363	33	T8	7b	Ons
1K	-	R1161D111D	LVR-IC	LDO, 1.1V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
1K	-	R5326N010A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1K8T	-	CMKZ5259B	Z-diode	Triple, 37.05..40.95V, Izt=3.2mA, Zzt=80Ω, 200mW	SOT-363	33dd	-	7b	Cen
1L	-	BC848CDW1	Si-npn	Dual, GP, 30V, 100mA, 200mW, B=420..800, >100MHz	SOT-363	33	T8	7b	Ons
1L	-	R1161D211D	LVR-IC	LDO, 2.1V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
1L	-	R5326N011A	LVR-IC	LDO, Dual out, Vout1/Vout2=3V/3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1L8T	-	CMKZ5260B	Z-diode	Triple, 40.85..45.15V, Izt=3.0mA, Zzt=93Ω, 200mW	SOT-363	33dd	-	7b	Cen
1M	-	R1161D311D	LVR-IC	LDO, 3.1V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
1M	-	R5326N012A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1M8T	-	CMKZ5261B	Z-diode	Triple, 44.65..49.35V, Izt=2.7mA, Zzt=105Ω, 200mW	SOT-363	33dd	-	7b	Cen
1N	-	R5326N013A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1Os	-	BC846PN	Si-n/p	Dual, GP, 80V, 100mA, 200mW, B=200..450, >100MHz	SOT-363	33	T9	7b	Sie
1P	-	R5326N014A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1Ps	-	BC847PN	Si-n/p	Dual, AF, 50V, 100mA, 250mW, B=110..800, >100MHz	SOT-363	33	T9	7b	Sie
1Q	-	R5326N015A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1R	-	R5326N016A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1S	-	R5326N017A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.1V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1T	-	R5326N018A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1U	-	R5326N019A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1V	-	BAT54VPT	Si-diode	Dual, Schottky barrier, 30V, 200mA, Vf<1V(100mA), 5ns	SOT-563	35dw	-	7b	Chm
1V	-	R5326N020A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1W	-	R5326N021A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1X	-	R5326N022A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1Y	-	R5326N023A	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.1V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
1Z	-	R5326N024A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
20	-	R1163D301E	LVR-IC	LDO, 3.0V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
2000D1	-	TPA2000D1PW	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 2W(5V/4Ω)	SOP-16	60	-	8d	Ti
2000D1	-	TPA2000D1TPWRQ1	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 2W(5V/4Ω)	SOP-16	60	-	8d	Ti
2000D2	-	TPA2000D2PWP	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x2W(5V/3Ω), shutdown	SSOP-24	60	-	8d	Ti
2001D1	-	TPA2001D1PW	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 1W(5V/8Ω)	SOP-16	60	-	8d	Ti
201	-	XC6420AB01MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/1.20V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2015G	-	LR32015BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2016G	-	LR32016BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2017G	-	LR32017BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2018G	-	LR32018BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2019G	-	LR32019BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
202	-	XC6420AB02MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/1.50V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2020G	-	LR32020BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2021G	-	LR32021BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2022A	-	SGM2022-AYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022AA	-	SGM2022-AAYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022C	-	SGM2022-CYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022D	-	SGM2022-DYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/ 2.5V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022E	-	SGM2022-EYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022G	-	LR32022BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2022G	-	SGM2022-GYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022H	-	SGM2022-HYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022I	-	SGM2022-IYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022K	-	SGM2022-KYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022M	-	SGM2022-MYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022N	-	SGM2022-NYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022O	-	SGM2022-OYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022P	-	SGM2022-PYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022Q	-	SGM2022-QYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022R	-	SGM2022-RYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022S	-	SGM2022-SYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022T	-	SGM2022-TYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022U	-	SGM2022-UYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022V	-	SGM2022-VYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022W	-	SGM2022-WYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022X	-	SGM2022-XYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022Y	-	SGM2022-YYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2022Z	-	SGM2022-ZYN6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 250mA, +CE	SOT-23-6	33zc	VR19	7b	Sgm
2023G	-	LR32023BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2024G	-	LR32024BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2025G	-	LR32025BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2026G	-	LR32026BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2027G	-	LR32027BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2028G	-	LR32028BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2029G	-	LR32029BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
203	-	XC6420AB03MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/2.50V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2030G	-	LR32030BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2031G	-	LR32031BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2032G	-	LR32032BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2033G	-	LR32033BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
204	-	XC6420AB04MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/2.85V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
205	-	XC6420AB05MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/3.00V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
206	-	XC6420AB06MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/3.30V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
207	-	XC6420AB07MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/1.50V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
208	-	XC6420AB08MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/1.80V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
209	-	XC6420AB09MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.50V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
20A	-	MMQA20V	TVS	Quad, Vrwm=20V, 24W(1ms)	SC-74	33	D14	7b	Ons
20A	-	TK74020L	LVR-IC	LDO, Dual out, Vout1/Vout2=2V/2V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
20M	-	XC6216B202QR-G	LVR-IC	2.0V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
20N	-	XC6216B212QR-G	LVR-IC	2.1V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
20P	-	TK11220BM	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
20P	-	XC6216B222QR-G	LVR-IC	2.2V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
20Q	-	TK11320BM	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
20R	-	TK11320CM	LVR-IC	LDO, 2.0V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
20R	-	XC6216B232QR-G	LVR-IC	2.3V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
20S	-	XC6216B242QR-G	LVR-IC	2.4V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
20T	-	XC6216B252QR-G	LVR-IC	2.5V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
20U	-	XC6216B262QR-G	LVR-IC	2.6V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
20V	-	XC6216B272QR-G	LVR-IC	2.7V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
20X	-	XC6216B282QR-G	LVR-IC	2.8V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
20Y	-	XC6216B292QR-G	LVR-IC	2.9V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
20Z	-	XC6216B302QR-G	LVR-IC	3.0V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21	-	R1163D311E	LVR-IC	LDO, 3.1V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
21	-	VNA-21	MMIC	RF amplifier, 0.5..2.5GHz, 13.1dB (50Ω)	SOT-363	33ac	A2	7b	Mc
210	-	XC6216B312QR-G	LVR-IC	3.1V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
210	-	XC6420AB10MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.85V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
211	-	XC6216B322QR-G	LVR-IC	3.2V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
211	-	XC6420AB11MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/3.00V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2111M-1.2G1	-	AP2111M-1.2G1	LVR-IC	LDO, 1.2V±1.5%, 600mA, +CE	SOIC-8	47s8	VR4	8d	Bcd
2111M-1.8G1	-	AP2111M-1.8G1	LVR-IC	LDO, 1.8V±1.5%, 600mA, +CE	SOIC-8	47s8	VR4	8d	Bcd
2111M-2.5G1	-	AP2111M-2.5G1	LVR-IC	LDO, 2.5V±1.5%, 600mA, +CE	SOIC-8	47s8	VR4	8d	Bcd
2111M-3.3G1	-	AP2111M-3.3G1	LVR-IC	LDO, 3.3V±1.5%, 600mA, +CE	SOIC-8	47s8	VR4	8d	Bcd
2111MP-1.2G1	-	AP2111MP-1.2G1	LVR-IC	LDO, 1.2V±1.5%, 600mA, +CE	PSOP-8	47s8	VR4	8d	Bcd
2111MP-1.8G1	-	AP2111MP-1.8G1	LVR-IC	LDO, 1.8V±1.5%, 600mA, +CE	PSOP-8	47s8	VR4	8d	Bcd
2111MP-2.5G1	-	AP2111MP-2.5G1	LVR-IC	LDO, 2.5V±1.5%, 600mA, +CE	PSOP-8	47s8	VR4	8d	Bcd
2111MP-3.3G1	-	AP2111MP-3.3G1	LVR-IC	LDO, 3.3V±1.5%, 600mA, +CE	PSOP-8	47s8	VR4	8d	Bcd
2115G	-	LR32115BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2116G	-	LR32116BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2117G	-	LR32117BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2118G	-	LR32118BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2119G	-	LR32119BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
212	-	XC6216B332QR-G	LVR-IC	3.3V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
212	-	XC6420AB12MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/3.30V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2120G	-	LR32110BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2121G	-	LR32121BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2122G	-	LR32122BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2123G	-	LR32123BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2124G	-	LR32124BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2125G	-	LR32125BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2126G	-	LR32126BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2127G	-	LR32127BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2128G	-	LR32128BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2129G	-	LR32129BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
213	-	XC6216B342QR-G	LVR-IC	3.4V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
213	-	XC6420AB13MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2130G	-	LR32130BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2131G	-	LR32131BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2132G	-	LR32132BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2133G	-	LR32133BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
214	-	XC6216B352QR-G	LVR-IC	3.5V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
214	-	XC6420AB14MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
215	-	XC6216B362QR-G	LVR-IC	3.6V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
215	-	XC6420AB15MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/2.85V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
216	-	XC6216B372QR-G	LVR-IC	3.7V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
216	-	XC6420AB16MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
217	-	XC6216B382QR-G	LVR-IC	3.8V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
217	-	XC6420AB17MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
218	-	XC6216B392QR-G	LVR-IC	3.9V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
218	-	XC6420AB18MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0/1.8V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
219	-	XC6216B402QR-G	LVR-IC	4.0V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
219	-	XC6420AB19MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
21A	-	MMQA21V	TVS	Quad, Vrwm=21V, 24W(1ms)	SC-74	33	D14	7b	Ons
21A	-	TK74021L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
21A	-	XC6216B412QR-G	LVR-IC	4.1V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21B	-	XC6216B422QR-G	LVR-IC	4.2V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21C	-	XC6216B432QR-G	LVR-IC	4.3V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21D	-	XC6216B442QR-G	LVR-IC	4.4V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21E	-	XC6216B452QR-G	LVR-IC	4.5V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21F	-	XC6216B462QR-G	LVR-IC	4.6V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21H	-	XC6216B472QR-G	LVR-IC	4.7V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21K	-	XC6216B482QR-G	LVR-IC	4.8V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21L	-	XC6216B492QR-G	LVR-IC	4.9V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21M	-	XC6216B502QR-G	LVR-IC	5.0V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21N	-	XC6216B512QR-G	LVR-IC	5.1V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21P	-	TK11221BM	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
21P	-	XC6216B522QR-G	LVR-IC	5.2V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
21Q	-	TK11321BM	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
21R	-	TK11321CM	LVR-IC	LDO, 2.1V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
21R	-	XC6216B532QR-G	LVR-IC	5.3V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21S	-	XC6216B542QR-G	LVR-IC	5.4V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21T	-	MMBZ5221BTW	Z-diode	Triple, 2.4V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-363	33dd	-	7c	Pjt
21T	-	XC6216B552QR-G	LVR-IC	5.5V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21U	-	XC6216B562QR-G	LVR-IC	5.6V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21V	-	XC6216B572QR-G	LVR-IC	5.7V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21X	-	XC6216B582QR-G	LVR-IC	5.8V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21Y	-	XC6216B592QR-G	LVR-IC	5.9V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
21Z	-	XC6216B602QR-G	LVR-IC	6.0V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22	-	R1163D321E	LVR-IC	LDO, 3.2V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
22	-	VNA-22	MMIC	RF amplifier, 0.5..2.5GHz, 12.2dB (50Ω)	SOT-363	33ac	A2	7b	Mc
220	-	XC6216B612QR-G	LVR-IC	6.1V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
220	-	XC6420AB20MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/2.50V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
221	-	XC6216B622QR-G	LVR-IC	6.2V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
221	-	XC6420AB21MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/2.80V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2215G	-	LR32215BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2216G	-	LR32216BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2217G	-	LR32217BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2218G	-	LR32218BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2219G	-	LR32219BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
222	-	XC6216B632QR-G	LVR-IC	6.3V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
222	-	XC6420AB22MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/2.85V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2220G	-	LR32220BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2221G	-	LR32221BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2222G	-	LR32222BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2223G	-	LR32223BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2224G	-	LR32224BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2225G	-	LR32225BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2226G	-	LR32226BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2227G	-	LR32227BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2228G	-	LR32228BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2229G	-	LR32229BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
223	-	XC6216B642QR-G	LVR-IC	6.4V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
223	-	XC6420AB23MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/1.50V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2230G	-	LR32230BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2231G	-	LR32231BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2232G	-	LR32232BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2233G	-	LR32233BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
224	-	XC6216B652QR-G	LVR-IC	6.5V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
224	-	XC6420AB24MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/3.00V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
225	-	XC6216B662QR-G	LVR-IC	6.6V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
225	-	XC6420AB25MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/3.30V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
226	-	XC6216B672QR-G	LVR-IC	6.7V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
226	-	XC6420AB26MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/3.00V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
227	-	XC6216B682QR-G	LVR-IC	6.8V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
227	-	XC6420AB27MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/3.30V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
228	-	XC6216B692QR-G	LVR-IC	6.9V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
228	-	XC6420AB28MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0/3.0V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
229	-	XC6216B702QR-G	LVR-IC	7.0V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
229	-	XC6420AB29MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/1.80V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
22A	-	MMQA22V	TVS	Quad, Vrwm=22V, 24W(1ms)	SC-74	33	D14	7b	Ons
22A	-	TK74022L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
22A	-	XC6216B712QR-G	LVR-IC	7.1V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22B	-	XC6216B722QR-G	LVR-IC	7.2V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22C	-	XC6216B732QR-G	LVR-IC	7.3V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22D	-	XC6216B742QR-G	LVR-IC	7.4V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22E	-	XC6216B752QR-G	LVR-IC	7.5V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22F	-	XC6216B762QR-G	LVR-IC	7.6V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22H	-	XC6216B772QR-G	LVR-IC	7.7V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22K	-	XC6216B782QR-G	LVR-IC	7.8V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22L	-	XC6216B792QR-G	LVR-IC	7.9V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22M	-	XC6216B802QR-G	LVR-IC	8.0V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22N	-	XC6216B812QR-G	LVR-IC	8.1V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22P	-	TK11222BM	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
22P	-	XC6216B822QR-G	LVR-IC	8.2V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22Q	-	TK11322BM	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
22R	-	TK11322CM	LVR-IC	LDO, 2.2V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
22R	-	XC6216B832QR-G	LVR-IC	8.3V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
22S	-	XC6216B842QR-G	LVR-IC	8.4V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22T	-	MMBZ5222BTW	Z-diode	Triple, 2.5V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-363	33dd	-	7c	Pjt
22T	-	XC6216B852QR-G	LVR-IC	8.5V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22U	-	XC6216B862QR-G	LVR-IC	8.6V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22V	-	XC6216B872QR-G	LVR-IC	8.7V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22X	-	XC6216B882QR-G	LVR-IC	8.8V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22Y	-	XC6216B892QR-G	LVR-IC	8.9V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
22Z	-	XC6216B902QR-G	LVR-IC	9.0V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23	-	R1163D331E	LVR-IC	LDO, 3.3V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
23	-	VNA-23	MMIC	RF amplifier, 0.5..2.5GHz, 14.6dB (50Ω)	SOT-363	33ac	A2	7b	Mc
230	-	XC6216B912QR-G	LVR-IC	9.1V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
230	-	XC6420AB30MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.30/2.80V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
231	-	XC6216B922QR-G	LVR-IC	9.2V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
231	-	XC6420AB31MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.80V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2315G	-	LR32315BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2316G	-	LR32316BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2317G	-	LR32317BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2318G	-	LR32318BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2319G	-	LR32319BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
232	-	XC6216B932QR-G	LVR-IC	9.3V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
232	-	XC6420AB32MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2320G	-	LR32320BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2321G	-	LR32321BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2322G	-	LR32322BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2323G	-	LR32323BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2324G	-	LR32324BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2325G	-	LR32325BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2326G	-	LR32326BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2327G	-	LR32327BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2328G	-	LR32328BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2329G	-	LR32329BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
233	-	XC6216B942QR-G	LVR-IC	9.4V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
233	-	XC6420AB33MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/2.80V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2330G	-	LR32330BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2331G	-	LR32331BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2332G	-	LR32332BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2333G	-	LR32333BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2338	-	KBA2338B-MSOP	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/4Ω), shutdown	SSOP-8	47	AFP24	8d	Ktc
234	-	XC6216B952QR-G	LVR-IC	9.5V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
234	-	XC6420AB34MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/3.00V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
235	-	XC6216B962QR-G	LVR-IC	9.6V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
235	-	XC6420AB35MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/3.30V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
236	-	XC6216B972QR-G	LVR-IC	9.7V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
236	-	XC6420AB36MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/3.60V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
237	-	XC6216B982QR-G	LVR-IC	9.8V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
237	-	XC6420AB37MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.60/1.20V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
238	-	XC6216B992QR-G	LVR-IC	9.9V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
238	-	XC6420AB38MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/2.80V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
239	-	XC6216BA02QR-G	LVR-IC	10.0V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
239	-	XC6420AB39MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/2.00V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
23A	-	TK74023L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
23A	-	XC6216BA12QR-G	LVR-IC	10.1V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23B	-	XC6216BA22QR-G	LVR-IC	10.2V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23C	-	XC6216BA32QR-G	LVR-IC	10.3V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23D	-	XC6216BA42QR-G	LVR-IC	10.4V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23E	-	XC6216BA52QR-G	LVR-IC	10.5V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23F	-	XC6216BA62QR-G	LVR-IC	10.6V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23H	-	XC6216BA72QR-G	LVR-IC	10.7V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23K	-	XC6216BA82QR-G	LVR-IC	10.8V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23L	-	XC6216BA92QR-G	LVR-IC	10.9V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23M	-	XC6216BB02QR-G	LVR-IC	11.0V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23N	-	XC6216BB12QR-G	LVR-IC	11.1V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23P	-	TK11223BM	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
23P	-	XC6216BB22QR-G	LVR-IC	11.2V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23Q	-	TK11323BM	LVR-IC	LDO, 2.3V 2.5%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
23R	-	XC6216BB32QR-G	LVR-IC	11.3V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23S	-	XC6216BB42QR-G	LVR-IC	11.4V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23T	-	MMBZ5223BTW	Z-diode	Triple, 2.7V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-363	33dd	-	7c	Pjt
23T	-	XC6216BB52QR-G	LVR-IC	11.5V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23U	-	XC6216BB62QR-G	LVR-IC	11.6V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
23V	-	XC6216BB72QR-G	LVR-IC	11.7V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23X	-	XC6216BB82QR-G	LVR-IC	11.8V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23Y	-	XC6216BB92QR-G	LVR-IC	11.9V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
23Z	-	XC6216BC02QR-G	LVR-IC	12.0V±2%, 150mA, +CE	SOP-8FD	s5	VR4	8c	Tor
24	-	µPA831TC	Si-npn	Dual, VHF/UHF, LN, 2V, 65mA, 90mW, B=70..140, 4.5GHz	SMM-6	35	T3	7b	Nec
24	-	R1163D341E	LVR-IC	LDO, 3.4V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
24/24	hh	SMS24	TVS	Quad, Vrwm=24V, 8A, 350W(1ms)	SOT-23-6L	33	D14	7b	Smt
240	-	XC6420AB40MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0/3.30V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
240	-	XC74WL240AASR	CMOS-Log	Dual bus buffer inverted with 3-state output	MSOP-8B	a6	Log67	8d	Tor
241	-	KIC7W241FK	CMOS-Log	Dual bus buffer non-inverted with 3-state output	US8	47	Log60	8c	Kec
241	-	XC6420AB41MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/3.30V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
241	-	XC74WL241AASR	CMOS-Log	Dual bus buffer non-inverted with 3-state output	MSOP-8B	a6	Log60	8d	Tor
2415G	-	LR32415BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2416G	-	LR32416BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2417G	-	LR32417BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2418G	-	LR32418BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2419G	-	LR32419BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
242	-	XC6420AB42MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.30/1.50V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2420G	-	LR32420BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2421G	-	LR32421BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2422G	-	LR32422BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2423G	-	LR32423BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2424G	-	LR32424BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2425G	-	LR32425BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2426G	-	LR32426BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2427G	-	LR32427BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2428G	-	LR32428BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2429G	-	LR32429BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
243	-	XC6420AB43MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.60/2.80V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2430G	-	LR32430BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2431G	-	LR32431BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2432G	-	LR32432BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2433G	-	LR32433BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
244	-	XC6420AB44MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.10/3.30V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
245	-	XC6420AB45MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.60V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
246	-	XC6420AB46MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.60/3.30V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
247	-	XC6420AB47MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.40/3.40V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
248	-	XC6420AB48MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/2.60V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
249	-	XC6420AB49MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/1.80V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
24A	-	MMQA24V	TVS	Quad, Vrwm=24V, 24W(1ms)	SC-74	33	D14	7b	Ons
24A	-	TK74024L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
24P	-	TK11224BM	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
24Q	-	TK11324BM	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
24R	-	µPA810T-FB	Si-npn	Dual, VHF/UHF, 20V, 100mA, 4.5GHz, B=40..80	SOT-363	33tf	T1	7b	Nec
24T	-	MMBZ5224BTW	Z-diode	Triple, 2.8V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-363	33dd	-	7c	Pjt
25	-	R1163D351E	LVR-IC	LDO, 3.5V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
25	-	VNA-25	MMIC	RF amplifier, 0.5..2.5GHz, 16dB (50Ω)	SOT-363	33ac	A2	7b	Mc
250	-	XC6420AB50MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
251	-	XC6420AB51MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.10/3.10V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2515G	-	LR32515BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2516G	-	LR32516BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2517G	-	LR32517BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2518G	-	LR32518BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2519G	-	LR32519BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
252	-	XC6420AB52MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/3.10V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2520G	-	LR32520BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2521G	-	LR32521BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2522G	-	LR32522BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2523G	-	LR32523BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2524G	-	LR32524BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2525G	-	LR32525BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2526G	-	LR32526BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2527G	-	LR32527BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2528G	-	LR32528BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2529G	-	LR32529BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
253	-	XC6420AB53MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/2.80V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
2530G	-	LR32530BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2531G	-	LR32531BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2532G	-	LR32532BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2533G	-	LR32533BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
254	-	XC6420AB54MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0/2.8V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
255	-	XC6420AB55MR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/3.00V±2%, 150mA, +CE	SOT-26	x5	VR19	7d	Tor
257	-	XC74WL157AASR	CMOS-Log	2-input multiplexer	MSOP-8B	a6	Log66	8d	Tor
25A	-	TK74025L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
25P	-	TK11225BM	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
25Q	-	TK11325BM	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
25R	-	µPA810T-GB	Si-npn	Dual, VHF/UHF, 20V, 100mA, 4.5GHz, B=70..140	SOT-363	33tf	T1	7b	Nec
25R	-	TK11325CM	LVR-IC	LDO, 2.5V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
25T	-	MMBZ5225BTW	Z-diode	Triple, 3.0V±5%, Izt=20mA, Zzt=29Ω, 200mW	SOT-363	33dd	-	7c	Pjt
26	-	R1163D361E	LVR-IC	LDO, 3.6V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
2615G	-	LR32615BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2616G	-	LR32616BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2617G	-	LR32617BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2618G	-	LR32618BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2619G	-	LR32619BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2620G	-	LR32620BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2621G	-	LR32621BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2622G	-	LR32622BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2623G	-	LR32623BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2624G	-	LR32624BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2625G	-	LR32625BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2626G	-	LR32626BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2627G	-	LR32627BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2628G	-	LR32628BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2629G	-	LR32629BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2630G	-	LR32630BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2631G	-	LR32631BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2632G	-	LR32632BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2633G	-	LR32633BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
26A	-	TK74026L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
26P	-	TK11226BM	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
26Q	-	TK11326BM	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
26R	-	TK11326CM	LVR-IC	LDO, 2.6V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
26T	-	MMBZ5226BTW	Z-diode	Triple, 3.3V±5%, Izt=20mA, Zzt=28Ω, 200mW	SOT-363	33dd	-	7c	Pjt
27	-	R1163D371E	LVR-IC	LDO, 3.7V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
2715G	-	LR32715BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2716G	-	LR32716BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2717G	-	LR32717BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2718G	-	LR32718BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2719G	-	LR32719BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2720G	-	LR32720BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2721G	-	LR32721BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2722G	-	LR32722BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2723G	-	LR32723BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2724G	-	LR32724BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2725G	-	LR32725BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2726G	-	LR32726BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2727G	-	LR32727BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2728G	-	LR32728BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2729G	-	LR32729BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2730G	-	LR32730BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2731G	-	LR32731BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2732G	-	LR32732BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2733G	-	LR32733BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
27A	-	MMQA27V	TVS	Quad, Vrwm=27V, 24W(1ms)	SC-74	33	D14	7b	Ons
27A	-	TK74027L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
27P	-	TK11227BM	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
27Q	-	TK11327BM	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
27R	-	TK11327CM	LVR-IC	LDO, 2.7V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
27T	-	MMBZ5227BTW	Z-diode	Triple, 3.6V±5%, Izt=20mA, Zzt=24Ω, 200mW	SOT-363	33dd	-	7c	Pjt
28	-	R1163D381E	LVR-IC	LDO, 3.8V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
28	-	VNA-28	MMIC	RF amplifier, 0.5..2.5GHz, 18.3dB (50Ω)	SOT-363	33ac	A2	7b	Mc
2811A	-	BM5446EFV	Lin-IC	AF PA, BTL, class-D, 10..26V, 2x20W(20V/4Ω), shutdown	HTSSOP-54	60	-	8c	Rhm
2811A	-	NCP2811ADT	Lin-IC	AF PA, 2.2..5.5V, 2x27mW(5V/32Ω), shutdown	TSSOP-14	60	-	8d	Ons
2811B	-	NCP2811BDT	Lin-IC	AF PA, 2.2..5.5V, 2x27mW(5V/32Ω), shutdown	TSSOP-14	60	-	8d	Ons
2815G	-	LR32815BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2816G	-	LR32816BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2817G	-	LR32817BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2818G	-	LR32818BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2819G	-	LR32819BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2820G	-	LR32820BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2821G	-	LR32821BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2822G	-	LR32822BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2823G	-	LR32823BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2824G	-	LR32824BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2825G	-	LR32825BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2826G	-	LR32826BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2827G	-	LR32827BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2828G	-	LR32828BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2829G	-	LR32829BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2830G	-	LR32830BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2831G	-	LR32831BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2832G	-	LR32832BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2833G	-	LR32833BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
28A	-	TK74028L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
28C	-	BZX84C28TW	Z-diode	Triple, 27.44..28.56V, Zzt=80Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
28P	-	TK11228BM	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
28Q	-	TK11328BM	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
28R	-	TK11328CM	LVR-IC	LDO, 2.8V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
28T	-	MMBZ5228BTW	Z-diode	Triple, 3.9V±5%, Izt=20mA, Zzt=23Ω, 200mW	SOT-363	33dd	-	7c	Pjt
29	-	R1163D391E	LVR-IC	LDO, 3.9V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
2915G	-	LR32915BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2916G	-	LR32916BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2917G	-	LR32917BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2918G	-	LR32918BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2919G	-	LR32919BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2920G	-	LR32920BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2921G	-	LR32921BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2922G	-	LR32922BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2923G	-	LR32923BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2924G	-	LR32924BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2925G	-	LR32925BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2926G	-	LR32926BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2927G	-	LR32927BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2928G	-	LR32928BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2929G	-	LR32929BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2930G	-	LR32930BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2931G	-	LR32931BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2932G	-	LR32932BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
2933G	-	LR32933BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
29A	-	TK74029L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
29P	-	TK11229BM	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
29Q	-	TK11329BM	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
29R	-	TK11329CM	LVR-IC	LDO, 2.9V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
29T	-	MMBZ5229BTW	Z-diode	Triple, 4.3V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOT-363	33dd	-	7c	Pjt
2A	-	R1161D181A5	LVR-IC	LDO, 1.85V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
2B	-	R1161D121A	LVR-IC	LDO, 1.2V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
2B253	-	XC9801B253KR-G	DC-DC-IC	PFM, step-up, 300kHz, 2.5V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B263	-	XC9801B263KR-G	DC-DC-IC	PFM, step-up, 300kHz, 2.6V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B273	-	XC9801B273KR-G	DC-DC-IC	PFM, step-up, 300kHz, 2.7V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B283	-	XC9801B283KR-G	DC-DC-IC	PFM, step-up, 300kHz, 2.8V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B293	-	XC9801B293KR-G	DC-DC-IC	PFM, step-up, 300kHz, 2.9V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B303	-	XC9801B303KR-G	DC-DC-IC	PFM, step-up, 300kHz, 3.0V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B313	-	XC9801B313KR-G	DC-DC-IC	PFM, step-up, 300kHz, 3.1V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B323	-	XC9801B323KR-G	DC-DC-IC	PFM, step-up, 300kHz, 3.2V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B333	-	XC9801B333KR-G	DC-DC-IC	PFM, step-up, 300kHz, 3.3V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B343	-	XC9801B343KR-G	DC-DC-IC	PFM, step-up, 300kHz, 3.4V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B353	-	XC9801B353KR-G	DC-DC-IC	PFM, step-up, 300kHz, 3.5V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B363	-	XC9801B363KR-G	DC-DC-IC	PFM, step-up, 300kHz, 3.6V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B373	-	XC9801B373KR-G	DC-DC-IC	PFM, step-up, 300kHz, 3.7V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B383	-	XC9801B383KR-G	DC-DC-IC	PFM, step-up, 300kHz, 3.8V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B393	-	XC9801B393KR-G	DC-DC-IC	PFM, step-up, 300kHz, 3.9V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B403	-	XC9801B403KR-G	DC-DC-IC	PFM, step-up, 300kHz, 4.0V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B413	-	XC9801B413KR-G	DC-DC-IC	PFM, step-up, 300kHz, 4.1V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B423	-	XC9801B423KR-G	DC-DC-IC	PFM, step-up, 300kHz, 4.2V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B433	-	XC9801B433KR-G	DC-DC-IC	PFM, step-up, 300kHz, 4.3V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B443	-	XC9801B443KR-G	DC-DC-IC	PFM, step-up, 300kHz, 4.4V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B453	-	XC9801B453KR-G	DC-DC-IC	PFM, step-up, 300kHz, 4.5V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B463	-	XC9801B463KR-G	DC-DC-IC	PFM, step-up, 300kHz, 4.6V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B473	-	XC9801B473KR-G	DC-DC-IC	PFM, step-up, 300kHz, 4.7V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2B483	-	XC9801B483KR-G	DC-DC-IC	PFM, step-up, 300kHz, 4.8V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B493	-	XC9801B493KR-G	DC-DC-IC	PFM, step-up, 300kHz, 4.9V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B503	-	XC9801B503KR-G	DC-DC-IC	PFM, step-up, 300kHz, 5.0V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B513	-	XC9801B513KR-G	DC-DC-IC	PFM, step-up, 300kHz, 5.1V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B523	-	XC9801B523KR-G	DC-DC-IC	PFM, step-up, 300kHz, 5.2V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B533	-	XC9801B533KR-G	DC-DC-IC	PFM, step-up, 300kHz, 5.3V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B543	-	XC9801B543KR-G	DC-DC-IC	PFM, step-up, 300kHz, 5.4V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B553	-	XC9801B553KR-G	DC-DC-IC	PFM, step-up, 300kHz, 5.5V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B563	-	XC9801B563KR-G	DC-DC-IC	PFM, step-up, 300kHz, 5.6V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B573	-	XC9801B573KR-G	DC-DC-IC	PFM, step-up, 300kHz, 5.7V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B583	-	XC9801B583KR-G	DC-DC-IC	PFM, step-up, 300kHz, 5.8V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B593	-	XC9801B593KR-G	DC-DC-IC	PFM, step-up, 300kHz, 5.9V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2B603	-	XC9801B603KR-G	DC-DC-IC	PFM, step-up, 300kHz, 6.0V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
2C	-	µPA843TC	Si-npn	Dual, VHF/UHF, 15(9)V, 35(100)mA, B=60..120, 13.5GHz	SMM-6	35	T3	7b	Nec
2C	-	R1161D221A	LVR-IC	LDO, 2.2V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
2D	-	R1161D321A	LVR-IC	LDO, 3.2V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
2E	-	R1161D181B5	LVR-IC	LDO, 1.85V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
2F	-	R1161D121B	LVR-IC	LDO, 1.2V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
2G	-	R1161D221B	LVR-IC	LDO, 2.2V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
2H	-	R1161D321B	LVR-IC	LDO, 3.2V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
2J	-	R1161D181D5	LVR-IC	LDO, 1.85V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
2K	-	DDZX22DTS	Z-diode	Triple, 22V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
2K	-	R1161D121D	LVR-IC	LDO, 1.2V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
2L	-	BAT754L	Si-diode	Triple, Schottky, Sw, U-Fst, 30V, 0.2A, Vf<0.6V(0.1A), <0.3ns	SOT-23-6	33dd	-	7b	Phi
2L	-	R1161D221D	LVR-IC	LDO, 2.2V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
2M	-	DDZX27DTS	Z-diode	Triple, 27V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
2M	-	R1161D321D	LVR-IC	LDO, 3.2V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
2N	-	DDZX30DS	Z-diode	Triple, 30V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
2N02	-	ZXM62N02E6	n-MOSFET	V-MOS, LogL, 20V, 1.7A, <0.1Ω	SOT-363	33fc	-	7b	Zx
2N03	-	ZXM62N03E6	n-MOSFET	V-MOS, LogL, 30V, 1.7A, <0.15Ω	SOT-363	33fc	-	7b	Zx
2P02	-	ZXM62P02E6	n-MOSFET	V-MOS, LogL, 20V, 2.3A, <0.2Ω	SOT-363	33fc	-	7b	Zx
2P03	-	ZXM62P03E6	n-MOSFET	V-MOS, LogL, 30V, 2.6A, <0.23Ω	SOT-363	33fc	-	7b	Zx
2V	-	BAS40VGP	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-563	35dw	-	7b	Chm
30	-	MUN5330DW	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=1k/1k0	SOT-363	33	TD2	7b	Mot
30	-	R1163D401E	LVR-IC	LDO, 4.0V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
301	-	TPA301D	Lin-IC	AF PA, BTL, 2.5..5.5V, 350mW(5V/8Ω), shutdown	SOP-8	47	AFP11	8d	Ti
3015G	-	LR33015BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3016G	-	LR33016BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3017G	-	LR33017BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3018G	-	LR33018BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3019G	-	LR33019BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3020G	-	LR33020BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3021G	-	LR33021BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3022G	-	LR33022BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3023G	-	LR33023BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3024G	-	LR33024BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3025G	-	LR33025BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3026G	-	LR33026BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3027G	-	LR33027BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3028G	-	LR33028BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3029G	-	LR33029BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3030G	-	LR33030BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3031G	-	LR33031BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3032G	-	LR33032BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3033G	-	LR33033BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
30A	-	MMQA30V	TVS	Quad, Vrwm=30V, 24W(1ms)	SC-74	33	D14	7b	Ons
30A	-	TK74030L	LVR-IC	LDO, Dual out, Vout1/Vout2=3V/3V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
30P	-	TK11230BM	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
30Q	-	TK11330BM	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
30R	-	TK11330CM	LVR-IC	LDO, 3.0V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
30T	-	MMBZ5230BTW	Z-diode	Triple, 4.7V±5%, Izt=20mA, Zzt=19Ω, 200mW	SOT-363	33dd	-	7c	Pjt
31	-	MUN5331DW	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2k2/2k2	SOT-363	33	TD2	7b	Mot
31	-	R1163D181E5	LVR-IC	LDO, 1.85V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
311	-	TPA311D	Lin-IC	AF PA, BTL, 2.5..5.5V, 250mW(5V/8Ω), shutdown	SOP-8	47	AFP23	8d	Ti
3115G	-	LR33115BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3116G	-	LR33116BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3117G	-	LR33117BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3118G	-	LR33118BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3119G	-	LR33119BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3120G	-	LR33120BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3121G	-	LR33121BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3122G	-	LR33122BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3123G	-	LR33123BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3124G	-	LR33124BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3125G	-	LR33125BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3126G	-	LR33126BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3127G	-	LR33127BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3128G	-	LR33128BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3129G	-	LR33129BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3130G	-	LR33130BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3131G	-	LR33131BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3132G	-	LR33132BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3133G	-	LR33133BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
31A	-	TK74031L	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
31AAAA	-	TC1301AAAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAAB	-	TC1301AAABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAAC	-	TC1301AAACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAAD	-	TC1301AAADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAAE	-	TC1301AAAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAAF	-	TC1301AAAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AABA	-	TC1301AABAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AABB	-	TC1301AABBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AABC	-	TC1301AABCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AABD	-	TC1301AABDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AABE	-	TC1301AABEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AABF	-	TC1301AABFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AACA	-	TC1301AACAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AACB	-	TC1301AACBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AACC	-	TC1301AACCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AACD	-	TC1301AACDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AACE	-	TC1301AACEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AACF	-	TC1301AACFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AADA	-	TC1301AADAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AADB	-	TC1301AADBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AADC	-	TC1301AADCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AADD	-	TC1301AADDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AADE	-	TC1301AADEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AADF	-	TC1301AADFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAEA	-	TC1301AAEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAEB	-	TC1301AAEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAEC	-	TC1301AAECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAED	-	TC1301AAEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAEE	-	TC1301AAEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAEF	-	TC1301AAEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAFA	-	TC1301AAFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAFB	-	TC1301AAFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAFC	-	TC1301AAFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAFD	-	TC1301AAFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAFE	-	TC1301AAFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAFF	-	TC1301AAFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAGA	-	TC1301AAGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAGB	-	TC1301AAGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAGC	-	TC1301AAGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAGD	-	TC1301AAGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAGE	-	TC1301AAGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAGF	-	TC1301AAGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAHA	-	TC1301AAHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAHB	-	TC1301AAHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAHC	-	TC1301AAHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAHD	-	TC1301AAHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAHE	-	TC1301AAHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAHF	-	TC1301AAHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAIA	-	TC1301AAIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAIB	-	TC1301AAIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAIC	-	TC1301AAICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAID	-	TC1301AAIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAIE	-	TC1301AAIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAIF	-	TC1301AAIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAJA	-	TC1301AAJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAJB	-	TC1301AAJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AAJC	-	TC1301AAJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAJD	-	TC1301AAJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAJE	-	TC1301AAJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAJF	-	TC1301AAJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAKA	-	TC1301AAKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAKB	-	TC1301AAKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAKC	-	TC1301AAKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAKD	-	TC1301AAKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAKE	-	TC1301AAKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAKF	-	TC1301AAKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AALA	-	TC1301AALAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AALB	-	TC1301AALBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AALC	-	TC1301AALCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AALD	-	TC1301AALDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AALE	-	TC1301AALEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AALF	-	TC1301AALFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAMA	-	TC1301AAMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAMB	-	TC1301AAMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAMC	-	TC1301AAMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAMD	-	TC1301AAMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAME	-	TC1301AAMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAMF	-	TC1301AAMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AANA	-	TC1301AANAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AANB	-	TC1301AANBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AANC	-	TC1301AANCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAND	-	TC1301AANDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AANE	-	TC1301AANEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AANF	-	TC1301AANFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAOA	-	TC1301AAOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAOB	-	TC1301AAOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAOC	-	TC1301AAOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAOD	-	TC1301AAODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAOE	-	TC1301AAOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAOF	-	TC1301AAOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAPA	-	TC1301AAPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAPB	-	TC1301AAPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAPC	-	TC1301AAPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAPD	-	TC1301AAPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAPE	-	TC1301AAPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAPF	-	TC1301AAPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAQA	-	TC1301AAQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAQB	-	TC1301AAQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAQC	-	TC1301AAQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAQD	-	TC1301AAQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAQE	-	TC1301AAQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAQF	-	TC1301AAQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AARA	-	TC1301AARAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AARB	-	TC1301AARBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AARC	-	TC1301AARCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AARD	-	TC1301AARDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AARE	-	TC1301AAREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AARF	-	TC1301AARFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AASA	-	TC1301AASAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AASB	-	TC1301AASBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AASC	-	TC1301AASCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AASD	-	TC1301AASDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AASE	-	TC1301AASEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AASF	-	TC1301AASFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AATA	-	TC1301AATAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AATB	-	TC1301AATBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AATC	-	TC1301AATCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AATD	-	TC1301AATDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AATE	-	TC1301AATEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AATF	-	TC1301AATFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAUA	-	TC1301AAUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAUB	-	TC1301AAUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAUC	-	TC1301AAUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAUD	-	TC1301AAUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAUE	-	TC1301AAUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAUF	-	TC1301AAUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AAVA	-	TC1301AAVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAVB	-	TC1301AAVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAVC	-	TC1301AAVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAVD	-	TC1301AAVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAVE	-	TC1301AAVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAVF	-	TC1301AAVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAWA	-	TC1301AAWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAWB	-	TC1301AAWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAWC	-	TC1301AAWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAWD	-	TC1301AAWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAWE	-	TC1301AAWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AAWF	-	TC1301AAWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABAA	-	TC1301ABAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABAB	-	TC1301ABABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABAC	-	TC1301ABACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABAD	-	TC1301ABADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABAE	-	TC1301ABAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABAF	-	TC1301ABAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABBA	-	TC1301ABBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABBB	-	TC1301ABBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABBC	-	TC1301ABBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABBD	-	TC1301ABBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABBE	-	TC1301ABBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABBF	-	TC1301ABBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABCA	-	TC1301ABCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABCB	-	TC1301ABCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABCC	-	TC1301ABCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABCD	-	TC1301ABCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABCE	-	TC1301ABCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABCF	-	TC1301ABCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABDA	-	TC1301ABDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABDB	-	TC1301ABDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABDC	-	TC1301ABDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABDD	-	TC1301ABDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABDE	-	TC1301ABDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABDF	-	TC1301ABDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABEA	-	TC1301ABEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABEB	-	TC1301ABEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABEC	-	TC1301ABECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABED	-	TC1301ABEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABEE	-	TC1301ABEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABEF	-	TC1301ABEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABFA	-	TC1301ABFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABFB	-	TC1301ABFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABFC	-	TC1301ABFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABFD	-	TC1301ABFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABFE	-	TC1301ABFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABFF	-	TC1301ABFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABGA	-	TC1301ABGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABGB	-	TC1301ABGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABGC	-	TC1301ABGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABGD	-	TC1301ABGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABGE	-	TC1301ABGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABGF	-	TC1301ABGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABHA	-	TC1301ABHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABHB	-	TC1301ABHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABHC	-	TC1301ABHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABHD	-	TC1301ABHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABHE	-	TC1301ABHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABHF	-	TC1301ABHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABIA	-	TC1301ABIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABIB	-	TC1301ABIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABIC	-	TC1301ABICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABID	-	TC1301ABIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABIE	-	TC1301ABIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABIF	-	TC1301ABIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABJA	-	TC1301ABJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABJB	-	TC1301ABJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABJC	-	TC1301ABJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABJD	-	TC1301ABJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31ABJE	-	TC1301ABJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABJF	-	TC1301ABJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABKA	-	TC1301ABKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABKB	-	TC1301ABKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABKC	-	TC1301ABKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABKD	-	TC1301ABKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABKE	-	TC1301ABKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABKF	-	TC1301ABKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABLA	-	TC1301ABLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABLB	-	TC1301ABLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABLC	-	TC1301ABLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABLD	-	TC1301ABLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABLE	-	TC1301ABLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABLF	-	TC1301ABLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABMA	-	TC1301ABMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABMB	-	TC1301ABMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABMC	-	TC1301ABMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABMD	-	TC1301ABMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABME	-	TC1301ABMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABMF	-	TC1301ABMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABNA	-	TC1301ABNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABNB	-	TC1301ABNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABNC	-	TC1301ABNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABND	-	TC1301ABNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABNE	-	TC1301ABNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABNF	-	TC1301ABNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABOA	-	TC1301ABOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABOB	-	TC1301ABOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABOC	-	TC1301ABOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABOD	-	TC1301ABODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABOE	-	TC1301ABOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABOF	-	TC1301ABOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABPA	-	TC1301ABPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABPB	-	TC1301ABPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABPC	-	TC1301ABPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABPD	-	TC1301ABPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABPE	-	TC1301ABPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABPF	-	TC1301ABPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABQA	-	TC1301ABQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABQB	-	TC1301ABQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABQC	-	TC1301ABQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABQD	-	TC1301ABQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABQE	-	TC1301ABQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABQF	-	TC1301ABQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABRA	-	TC1301ABRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABRB	-	TC1301ABRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABRC	-	TC1301ABRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABRD	-	TC1301ABRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABRE	-	TC1301ABREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABRF	-	TC1301ABRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABSA	-	TC1301ABSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABSB	-	TC1301ABSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABSC	-	TC1301ABSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABSD	-	TC1301ABSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABSE	-	TC1301ABSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABSF	-	TC1301ABSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABTA	-	TC1301ABTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABTB	-	TC1301ABTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABTC	-	TC1301ABTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABTD	-	TC1301ABTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABTE	-	TC1301ABTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABTF	-	TC1301ABTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABUA	-	TC1301ABUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABUB	-	TC1301ABUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABUC	-	TC1301ABUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABUD	-	TC1301ABUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABUE	-	TC1301ABUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABUF	-	TC1301ABUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABVA	-	TC1301ABVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABVB	-	TC1301ABVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31ABVC	-	TC1301ABVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABVD	-	TC1301ABVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABVE	-	TC1301ABVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABVF	-	TC1301ABVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABWA	-	TC1301ABWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABWB	-	TC1301ABWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABWC	-	TC1301ABWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABWD	-	TC1301ABWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABWE	-	TC1301ABWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ABWF	-	TC1301ABWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACAA	-	TC1301ACAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACAB	-	TC1301ACABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACAC	-	TC1301ACACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACAD	-	TC1301ACADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACAE	-	TC1301ACAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACAF	-	TC1301ACAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACBA	-	TC1301ACBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACBB	-	TC1301ACBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACBC	-	TC1301ACBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACBD	-	TC1301ACBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACBE	-	TC1301ACBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACBF	-	TC1301ACBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACCA	-	TC1301ACCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACCB	-	TC1301ACCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACCC	-	TC1301ACCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACCD	-	TC1301ACCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACCE	-	TC1301ACCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACCF	-	TC1301ACCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACDA	-	TC1301ACDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACDB	-	TC1301ACDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACDC	-	TC1301ACDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACDD	-	TC1301ACDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACDE	-	TC1301ACDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACDF	-	TC1301ACDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACEA	-	TC1301ACEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACEB	-	TC1301ACEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACEC	-	TC1301ACECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACED	-	TC1301ACEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACEE	-	TC1301ACEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACEF	-	TC1301ACEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACFA	-	TC1301ACFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACFB	-	TC1301ACFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACFC	-	TC1301ACFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACFD	-	TC1301ACFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACFE	-	TC1301ACFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACFF	-	TC1301ACFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACGA	-	TC1301ACGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACGB	-	TC1301ACGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACGC	-	TC1301ACGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACGD	-	TC1301ACGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACGE	-	TC1301ACGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACGF	-	TC1301ACGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACHA	-	TC1301ACHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACHB	-	TC1301ACHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACHC	-	TC1301ACHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACHD	-	TC1301ACHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACHE	-	TC1301ACHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACHF	-	TC1301ACHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACIA	-	TC1301ACIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACIB	-	TC1301ACIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACIC	-	TC1301ACICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACID	-	TC1301ACIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACIE	-	TC1301ACIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACIF	-	TC1301ACIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACJA	-	TC1301ACJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACJB	-	TC1301ACJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACJC	-	TC1301ACJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACJD	-	TC1301ACJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACJE	-	TC1301ACJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACJF	-	TC1301ACJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31ACKA	-	TC1301ACKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACKB	-	TC1301ACKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACKC	-	TC1301ACKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACKD	-	TC1301ACKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACKE	-	TC1301ACKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACKF	-	TC1301ACKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACLA	-	TC1301ACLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACLB	-	TC1301ACLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACLC	-	TC1301ACLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACLD	-	TC1301ACLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACLE	-	TC1301ACLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACLF	-	TC1301ACLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACMA	-	TC1301ACMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACMB	-	TC1301ACMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACMC	-	TC1301ACMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACMD	-	TC1301ACMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACME	-	TC1301ACMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACMF	-	TC1301ACMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACNA	-	TC1301ACNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACNB	-	TC1301ACNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACNC	-	TC1301ACNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACND	-	TC1301ACNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACNE	-	TC1301ACNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACNF	-	TC1301ACNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACOA	-	TC1301ACOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACOB	-	TC1301ACOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACOC	-	TC1301ACOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACOD	-	TC1301ACODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACOE	-	TC1301ACOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACOF	-	TC1301ACOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACPA	-	TC1301ACPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACPB	-	TC1301ACPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACPC	-	TC1301ACPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACPD	-	TC1301ACPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACPE	-	TC1301ACPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACPF	-	TC1301ACPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACQA	-	TC1301ACQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACQB	-	TC1301ACQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACQC	-	TC1301ACQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACQD	-	TC1301ACQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACQE	-	TC1301ACQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACQF	-	TC1301ACQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACRA	-	TC1301ACRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACRB	-	TC1301ACRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACRC	-	TC1301ACRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACRD	-	TC1301ACRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACRE	-	TC1301ACREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACRF	-	TC1301ACRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACSA	-	TC1301ACSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACSB	-	TC1301ACSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACSC	-	TC1301ACSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACSD	-	TC1301ACSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACSE	-	TC1301ACSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACSF	-	TC1301ACSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACTA	-	TC1301ACTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACTB	-	TC1301ACTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACTC	-	TC1301ACTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACTD	-	TC1301ACTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACTE	-	TC1301ACTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACTF	-	TC1301ACTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACUA	-	TC1301ACUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACUB	-	TC1301ACUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACUC	-	TC1301ACUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACUD	-	TC1301ACUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACUE	-	TC1301ACUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACUF	-	TC1301ACUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACVA	-	TC1301ACVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACVB	-	TC1301ACVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACVC	-	TC1301ACVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACVD	-	TC1301ACVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31ACVE	-	TC1301ACVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACVF	-	TC1301ACVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACWA	-	TC1301ACWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACWB	-	TC1301ACWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACWC	-	TC1301ACWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACWD	-	TC1301ACWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACWE	-	TC1301ACWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ACWF	-	TC1301ACWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADAA	-	TC1301ADAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADAB	-	TC1301ADABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADAC	-	TC1301ADACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADAD	-	TC1301ADADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADAE	-	TC1301ADAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADAF	-	TC1301ADAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADBA	-	TC1301ADBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADBB	-	TC1301ADBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADBC	-	TC1301ADBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADBD	-	TC1301ADBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADBE	-	TC1301ADBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADBF	-	TC1301ADBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADCA	-	TC1301ADCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADCB	-	TC1301ADCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADCC	-	TC1301ADCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADCD	-	TC1301ADCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADCE	-	TC1301ADCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADCF	-	TC1301ADCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADDA	-	TC1301ADDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADDB	-	TC1301ADDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADDC	-	TC1301ADDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADDD	-	TC1301ADDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADDE	-	TC1301ADDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADDF	-	TC1301ADDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADEA	-	TC1301ADEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADEB	-	TC1301ADEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADEC	-	TC1301ADECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADED	-	TC1301ADEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADEE	-	TC1301ADEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADEF	-	TC1301ADEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADFA	-	TC1301ADFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADFB	-	TC1301ADFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADFC	-	TC1301ADFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADFD	-	TC1301ADFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADFE	-	TC1301ADFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADFF	-	TC1301ADFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADGA	-	TC1301ADGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADGB	-	TC1301ADGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADGC	-	TC1301ADGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADGD	-	TC1301ADGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADGE	-	TC1301ADGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADGF	-	TC1301ADGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADHA	-	TC1301ADHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADHB	-	TC1301ADHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADHC	-	TC1301ADHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADHD	-	TC1301ADHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADHE	-	TC1301ADHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADHF	-	TC1301ADHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADIA	-	TC1301ADIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADIB	-	TC1301ADIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADIC	-	TC1301ADICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADID	-	TC1301ADIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADIE	-	TC1301ADIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADIF	-	TC1301ADIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADJA	-	TC1301ADJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADJB	-	TC1301ADJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADJC	-	TC1301ADJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADJD	-	TC1301ADJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADJE	-	TC1301ADJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADJF	-	TC1301ADJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADKA	-	TC1301ADKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADKB	-	TC1301ADKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31ADKC	-	TC1301ADKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADKD	-	TC1301ADKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADKE	-	TC1301ADKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADKF	-	TC1301ADKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADLA	-	TC1301ADLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADLB	-	TC1301ADLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADLC	-	TC1301ADLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADLD	-	TC1301ADLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADLE	-	TC1301ADLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADLF	-	TC1301ADLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADMA	-	TC1301ADMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADMB	-	TC1301ADMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADMC	-	TC1301ADMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADMD	-	TC1301ADMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADME	-	TC1301ADMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADMF	-	TC1301ADMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADNA	-	TC1301ADNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADNB	-	TC1301ADNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADNC	-	TC1301ADNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADND	-	TC1301ADNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADNE	-	TC1301ADNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADNF	-	TC1301ADNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADOA	-	TC1301ADOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADOB	-	TC1301ADOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADOC	-	TC1301ADOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADOD	-	TC1301ADODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADOE	-	TC1301ADOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADOF	-	TC1301ADOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADPA	-	TC1301ADPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADPB	-	TC1301ADPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADPC	-	TC1301ADPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADPD	-	TC1301ADPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADPE	-	TC1301ADPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADPF	-	TC1301ADPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADQA	-	TC1301ADQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADQB	-	TC1301ADQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADQC	-	TC1301ADQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADQD	-	TC1301ADQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADQE	-	TC1301ADQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADQF	-	TC1301ADQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADRA	-	TC1301ADRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADRB	-	TC1301ADRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADRC	-	TC1301ADRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADRD	-	TC1301ADRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADRE	-	TC1301ADREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADRF	-	TC1301ADRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADSA	-	TC1301ADSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADSB	-	TC1301ADSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADSC	-	TC1301ADSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADSD	-	TC1301ADSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADSE	-	TC1301ADSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADSF	-	TC1301ADSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADTA	-	TC1301ADTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADTB	-	TC1301ADTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADTC	-	TC1301ADTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADTD	-	TC1301ADTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADTE	-	TC1301ADTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADTF	-	TC1301ADTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADUA	-	TC1301ADUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADUB	-	TC1301ADUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADUC	-	TC1301ADUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADUD	-	TC1301ADUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADUE	-	TC1301ADUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADUF	-	TC1301ADUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADVA	-	TC1301ADVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADVB	-	TC1301ADVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADVC	-	TC1301ADVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADVD	-	TC1301ADVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADVE	-	TC1301ADVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADVF	-	TC1301ADVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31ADWA	-	TC1301ADWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADWB	-	TC1301ADWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADWC	-	TC1301ADWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADWD	-	TC1301ADWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADWE	-	TC1301ADWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ADWF	-	TC1301ADWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEAA	-	TC1301AEAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEAB	-	TC1301AEABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEAC	-	TC1301AEACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEAD	-	TC1301AEADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEAE	-	TC1301AEAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEAF	-	TC1301AEAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEBA	-	TC1301AEBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEBB	-	TC1301AEBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEBC	-	TC1301AEBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEBD	-	TC1301AEBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEBE	-	TC1301AEBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEBF	-	TC1301AEBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AECA	-	TC1301AECAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AECB	-	TC1301AECBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AECC	-	TC1301AECCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AECD	-	TC1301AECDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AECE	-	TC1301AECEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AECF	-	TC1301AECFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEDA	-	TC1301AEDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEDB	-	TC1301AEDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEDC	-	TC1301AEDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEDD	-	TC1301AEDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEDE	-	TC1301AEDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEDF	-	TC1301AEDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEEA	-	TC1301AEEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEEB	-	TC1301AEEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEEC	-	TC1301AEECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEED	-	TC1301AEEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEEE	-	TC1301AEEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEEF	-	TC1301AEEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEFA	-	TC1301AEFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEFB	-	TC1301AEFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEFC	-	TC1301AEFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEFD	-	TC1301AEFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEFE	-	TC1301AEFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEFF	-	TC1301AEFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEGA	-	TC1301AEGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEGB	-	TC1301AEGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEGC	-	TC1301AEGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEGD	-	TC1301AEGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEGE	-	TC1301AEGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEGF	-	TC1301AEGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEHA	-	TC1301AEHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEHB	-	TC1301AEHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEHC	-	TC1301AEHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEHD	-	TC1301AEHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEHE	-	TC1301AEHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEHF	-	TC1301AEHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEIA	-	TC1301AEIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEIB	-	TC1301AEIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEIC	-	TC1301AEICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEID	-	TC1301AEIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEIE	-	TC1301AEIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEIF	-	TC1301AEIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEJA	-	TC1301AEJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEJB	-	TC1301AEJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEJC	-	TC1301AEJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEJD	-	TC1301AEJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEJE	-	TC1301AEJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEJF	-	TC1301AEJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEKA	-	TC1301AEKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEKB	-	TC1301AEKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEKC	-	TC1301AEKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEKD	-	TC1301AEKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AEKE	-	TC1301AEKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEKF	-	TC1301AEKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AELA	-	TC1301AELAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AELB	-	TC1301AELBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AELC	-	TC1301AELCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AELD	-	TC1301AELDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AELE	-	TC1301AELEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AELF	-	TC1301AELFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEMA	-	TC1301AEMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEMB	-	TC1301AEMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEMC	-	TC1301AEMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEMD	-	TC1301AEMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEME	-	TC1301AEMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEMF	-	TC1301AEMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AENA	-	TC1301AENAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AENB	-	TC1301AENBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AENC	-	TC1301AENCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEND	-	TC1301AENDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AENE	-	TC1301AENEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AENF	-	TC1301AENFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEOA	-	TC1301AEOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEOB	-	TC1301AEOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEOC	-	TC1301AEOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEOD	-	TC1301AEODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEOE	-	TC1301AEOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEOF	-	TC1301AEOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEPA	-	TC1301AEPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEPB	-	TC1301AEPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEPC	-	TC1301AEPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEPD	-	TC1301AEPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEPE	-	TC1301AEPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEPF	-	TC1301AEPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEQA	-	TC1301AEQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEQB	-	TC1301AEQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEQC	-	TC1301AEQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEQD	-	TC1301AEQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEQE	-	TC1301AEQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEQF	-	TC1301AEQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AERA	-	TC1301AERAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AERB	-	TC1301AERBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AERC	-	TC1301AERCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AERD	-	TC1301AERDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AERE	-	TC1301AEREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AERF	-	TC1301AERFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AESA	-	TC1301AESAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AESB	-	TC1301AESBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AESC	-	TC1301AESCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AESD	-	TC1301AESDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AESE	-	TC1301AESEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AESF	-	TC1301AESFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AETA	-	TC1301AETAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AETB	-	TC1301AETBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AETC	-	TC1301AETCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AETD	-	TC1301AETDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AETE	-	TC1301AETEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AETF	-	TC1301AETFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEUA	-	TC1301AEUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEUB	-	TC1301AEUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEUC	-	TC1301AEUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEUD	-	TC1301AEUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEUE	-	TC1301AEUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEUF	-	TC1301AEUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEVA	-	TC1301AEVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEVB	-	TC1301AEVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEVC	-	TC1301AEVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEVD	-	TC1301AEVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEVE	-	TC1301AEVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEVF	-	TC1301AEVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEWA	-	TC1301AEWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEWB	-	TC1301AEWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AEWC	-	TC1301AEWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEWD	-	TC1301AEWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEWE	-	TC1301AEWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AEWF	-	TC1301AEWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFAA	-	TC1301AFAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFAB	-	TC1301AFABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFAC	-	TC1301AFACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFAD	-	TC1301AFADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFAE	-	TC1301AFAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFAF	-	TC1301AFAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFBA	-	TC1301AFBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFBB	-	TC1301AFBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFBC	-	TC1301AFBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFBD	-	TC1301AFBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFBE	-	TC1301AFBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFBF	-	TC1301AFBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFCA	-	TC1301AFCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFCB	-	TC1301AFCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFCC	-	TC1301AFCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFCD	-	TC1301AFCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFCE	-	TC1301AFCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFCF	-	TC1301AFCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFDA	-	TC1301AFDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFDB	-	TC1301AFDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFDC	-	TC1301AFDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFDD	-	TC1301AFDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFDE	-	TC1301AFDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFDF	-	TC1301AFDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFEA	-	TC1301AFEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFEB	-	TC1301AFEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFEC	-	TC1301AFECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFED	-	TC1301AFEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFEE	-	TC1301AFEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFEF	-	TC1301AFEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFFA	-	TC1301AFFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFFB	-	TC1301AFFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFFC	-	TC1301AFFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFFD	-	TC1301AFFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFFE	-	TC1301AFFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFFF	-	TC1301AFFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFGA	-	TC1301AFGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFGB	-	TC1301AFGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFGC	-	TC1301AFGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFGD	-	TC1301AFGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFGE	-	TC1301AFGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFGF	-	TC1301AFGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFHA	-	TC1301AFHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFHB	-	TC1301AFHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFHC	-	TC1301AFHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFHD	-	TC1301AFHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFHE	-	TC1301AFHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFHF	-	TC1301AFHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFIA	-	TC1301AFIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFIB	-	TC1301AFIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFIC	-	TC1301AFICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFID	-	TC1301AFIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFIE	-	TC1301AFIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFIF	-	TC1301AFIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFJA	-	TC1301AFJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFJB	-	TC1301AFJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFJC	-	TC1301AFJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFJD	-	TC1301AFJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFJE	-	TC1301AFJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFJF	-	TC1301AFJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFKA	-	TC1301AFKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFKB	-	TC1301AFKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFKC	-	TC1301AFKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFKD	-	TC1301AFKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFKE	-	TC1301AFKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFKF	-	TC1301AFKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AFLA	-	TC1301AFLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFLB	-	TC1301AFLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFLC	-	TC1301AFLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFLD	-	TC1301AFLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFLE	-	TC1301AFLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFLF	-	TC1301AFLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFMA	-	TC1301AFMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFMB	-	TC1301AFMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFMC	-	TC1301AFMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFMD	-	TC1301AFMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFME	-	TC1301AFMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFMF	-	TC1301AFMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFNA	-	TC1301AFNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFNB	-	TC1301AFNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFNC	-	TC1301AFNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFND	-	TC1301AFNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFNE	-	TC1301AFNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFNF	-	TC1301AFNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFOA	-	TC1301AFOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFOB	-	TC1301AFOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFOC	-	TC1301AFOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFOD	-	TC1301AFODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFOE	-	TC1301AFOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFOF	-	TC1301AFOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFPA	-	TC1301AFPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFPB	-	TC1301AFPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFPC	-	TC1301AFPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFPD	-	TC1301AFPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFPE	-	TC1301AFPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFPF	-	TC1301AFPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFQA	-	TC1301AFQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFQB	-	TC1301AFQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFQC	-	TC1301AFQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFQD	-	TC1301AFQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFQE	-	TC1301AFQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFQF	-	TC1301AFQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFRA	-	TC1301AFRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFRB	-	TC1301AFRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFRC	-	TC1301AFRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFRD	-	TC1301AFRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFRE	-	TC1301AFREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFRF	-	TC1301AFRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFSA	-	TC1301AFSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFSB	-	TC1301AFSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFSC	-	TC1301AFSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFSD	-	TC1301AFSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFSE	-	TC1301AFSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFSF	-	TC1301AFSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFTA	-	TC1301AFTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFTB	-	TC1301AFTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFTC	-	TC1301AFTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFTD	-	TC1301AFTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFTE	-	TC1301AFTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFTF	-	TC1301AFTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFUA	-	TC1301AFUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFUB	-	TC1301AFUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFUC	-	TC1301AFUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFUD	-	TC1301AFUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFUE	-	TC1301AFUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFUF	-	TC1301AFUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFVA	-	TC1301AFVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFVB	-	TC1301AFVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFVC	-	TC1301AFVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFVD	-	TC1301AFVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFVE	-	TC1301AFVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFVF	-	TC1301AFVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFWA	-	TC1301AFWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFWB	-	TC1301AFWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFWC	-	TC1301AFWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFWD	-	TC1301AFWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AFWE	-	TC1301AFWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AFWF	-	TC1301AFWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGAA	-	TC1301AGAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGAB	-	TC1301AGABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGAC	-	TC1301AGACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGAD	-	TC1301AGADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGAE	-	TC1301AGAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGAF	-	TC1301AGAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGBA	-	TC1301AGBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGBB	-	TC1301AGBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGBC	-	TC1301AGBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGBD	-	TC1301AGBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGBE	-	TC1301AGBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGBF	-	TC1301AGBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGCA	-	TC1301AGCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGCB	-	TC1301AGCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGCC	-	TC1301AGCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGCD	-	TC1301AGCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGCE	-	TC1301AGCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGCF	-	TC1301AGCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGDA	-	TC1301AGDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGDB	-	TC1301AGDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGDC	-	TC1301AGDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGDD	-	TC1301AGDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGDE	-	TC1301AGDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGDF	-	TC1301AGDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGEA	-	TC1301AGEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGEB	-	TC1301AGEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGEC	-	TC1301AGECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGED	-	TC1301AGEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGEE	-	TC1301AGEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGEF	-	TC1301AGEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGFA	-	TC1301AGFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGFB	-	TC1301AGFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGFC	-	TC1301AGFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGFD	-	TC1301AGFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGFE	-	TC1301AGFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGFF	-	TC1301AGFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGGA	-	TC1301AGGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGGB	-	TC1301AGGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGGC	-	TC1301AGGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGGD	-	TC1301AGGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGGE	-	TC1301AGGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGGF	-	TC1301AGGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGHA	-	TC1301AGHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGHB	-	TC1301AGHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGHC	-	TC1301AGHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGHD	-	TC1301AGHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGHE	-	TC1301AGHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGHF	-	TC1301AGHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGIA	-	TC1301AGIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGIB	-	TC1301AGIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGIC	-	TC1301AGICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGID	-	TC1301AGIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGIE	-	TC1301AGIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGIF	-	TC1301AGIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGJA	-	TC1301AGJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGJB	-	TC1301AGJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGJC	-	TC1301AGJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGJD	-	TC1301AGJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGJE	-	TC1301AGJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGJF	-	TC1301AGJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGKA	-	TC1301AGKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGKB	-	TC1301AGKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGKC	-	TC1301AGKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGKD	-	TC1301AGKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGKE	-	TC1301AGKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGKF	-	TC1301AGKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGLA	-	TC1301AGLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGLB	-	TC1301AGLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AGLC	-	TC1301AGLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGLD	-	TC1301AGLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGLE	-	TC1301AGLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGLF	-	TC1301AGLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGMA	-	TC1301AGMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGMB	-	TC1301AGMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGMC	-	TC1301AGMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGMD	-	TC1301AGMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGME	-	TC1301AGMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGMF	-	TC1301AGMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGNA	-	TC1301AGNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGNB	-	TC1301AGNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGNC	-	TC1301AGNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGND	-	TC1301AGNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGNE	-	TC1301AGNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGNF	-	TC1301AGNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGOA	-	TC1301AGOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGOB	-	TC1301AGOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGOC	-	TC1301AGOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGOD	-	TC1301AGODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGOE	-	TC1301AGOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGOF	-	TC1301AGOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGPA	-	TC1301AGPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGPB	-	TC1301AGPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGPC	-	TC1301AGPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGPD	-	TC1301AGPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGPE	-	TC1301AGPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGPF	-	TC1301AGPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGQA	-	TC1301AGQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGQB	-	TC1301AGQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGQC	-	TC1301AGQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGQD	-	TC1301AGQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGQE	-	TC1301AGQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGQF	-	TC1301AGQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGRA	-	TC1301AGRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGRB	-	TC1301AGRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGRC	-	TC1301AGRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGRD	-	TC1301AGRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGRE	-	TC1301AGREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGRF	-	TC1301AGRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGSA	-	TC1301AGSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGSB	-	TC1301AGSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGSC	-	TC1301AGSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGSD	-	TC1301AGSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGSE	-	TC1301AGSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGSF	-	TC1301AGSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGTA	-	TC1301AGTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGTB	-	TC1301AGTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGTC	-	TC1301AGTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGTD	-	TC1301AGTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGTE	-	TC1301AGTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGTF	-	TC1301AGTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGUA	-	TC1301AGUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGUB	-	TC1301AGUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGUC	-	TC1301AGUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGUD	-	TC1301AGUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGUE	-	TC1301AGUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGUF	-	TC1301AGUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGVA	-	TC1301AGVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGVB	-	TC1301AGVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGVC	-	TC1301AGVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGVD	-	TC1301AGVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGVE	-	TC1301AGVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGVF	-	TC1301AGVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGWA	-	TC1301AGWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGWB	-	TC1301AGWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGWC	-	TC1301AGWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGWD	-	TC1301AGWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGWE	-	TC1301AGWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AGWF	-	TC1301AGWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AHAA	-	TC1301AHAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHAB	-	TC1301AHABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHAC	-	TC1301AHACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHAD	-	TC1301AHADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHAE	-	TC1301AHAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHAF	-	TC1301AHAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHBA	-	TC1301AHBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHBB	-	TC1301AHBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHBC	-	TC1301AHBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHBD	-	TC1301AHBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHBE	-	TC1301AHBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHBF	-	TC1301AHBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHCA	-	TC1301AHCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHCB	-	TC1301AHCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHCC	-	TC1301AHCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHCD	-	TC1301AHCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHCE	-	TC1301AHCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHCF	-	TC1301AHCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHDA	-	TC1301AHDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHDB	-	TC1301AHDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHDC	-	TC1301AHDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHDD	-	TC1301AHDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHDE	-	TC1301AHDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHDF	-	TC1301AHDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHEA	-	TC1301AHEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHEB	-	TC1301AHEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHEC	-	TC1301AHECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHED	-	TC1301AHEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHEE	-	TC1301AHEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHEF	-	TC1301AHEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHFA	-	TC1301AHFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHFB	-	TC1301AHFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHFC	-	TC1301AHFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHFD	-	TC1301AHFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHFE	-	TC1301AHFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHFF	-	TC1301AHFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHGA	-	TC1301AHGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHGB	-	TC1301AHGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHGC	-	TC1301AHGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHGD	-	TC1301AHGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHGE	-	TC1301AHGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHGF	-	TC1301AHGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHHA	-	TC1301AHHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHHB	-	TC1301AHHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHHC	-	TC1301AHHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHHD	-	TC1301AHHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHHE	-	TC1301AHHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHHF	-	TC1301AHHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHIA	-	TC1301AHIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHIB	-	TC1301AHIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHIC	-	TC1301AHICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHID	-	TC1301AHIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHIE	-	TC1301AHIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHIF	-	TC1301AHIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHJA	-	TC1301AHJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHJB	-	TC1301AHJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHJC	-	TC1301AHJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHJD	-	TC1301AHJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHJE	-	TC1301AHJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHJF	-	TC1301AHJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHKA	-	TC1301AHKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHKB	-	TC1301AHKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHKC	-	TC1301AHKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHKD	-	TC1301AHKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHKE	-	TC1301AHKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHKF	-	TC1301AHKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHLA	-	TC1301AHLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHLB	-	TC1301AHLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHLC	-	TC1301AHLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHLD	-	TC1301AHLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AHLE	-	TC1301AHLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHLF	-	TC1301AHLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHMA	-	TC1301AHMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHMB	-	TC1301AHMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHMC	-	TC1301AHMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHMD	-	TC1301AHMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHME	-	TC1301AHMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHMF	-	TC1301AHMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHNA	-	TC1301AHNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHNB	-	TC1301AHNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHNC	-	TC1301AHNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHND	-	TC1301AHNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHNE	-	TC1301AHNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHNF	-	TC1301AHNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHOA	-	TC1301AHOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHOB	-	TC1301AHOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHOC	-	TC1301AHOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHOD	-	TC1301AHODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHOE	-	TC1301AHOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHOF	-	TC1301AHOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHPA	-	TC1301AHPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHPB	-	TC1301AHPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHPC	-	TC1301AHPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHPD	-	TC1301AHPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHPE	-	TC1301AHPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHPF	-	TC1301AHPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHQA	-	TC1301AHQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHQB	-	TC1301AHQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHQC	-	TC1301AHQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHQD	-	TC1301AHQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHQE	-	TC1301AHQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHQF	-	TC1301AHQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHRA	-	TC1301AHRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHRB	-	TC1301AHRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHRC	-	TC1301AHRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHRD	-	TC1301AHRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHRE	-	TC1301AHREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHRF	-	TC1301AHRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHSA	-	TC1301AHSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHSB	-	TC1301AHSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHSC	-	TC1301AHSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHSD	-	TC1301AHSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHSE	-	TC1301AHSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHSF	-	TC1301AHSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHTA	-	TC1301AHTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHTB	-	TC1301AHTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHTC	-	TC1301AHTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHTD	-	TC1301AHTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHTE	-	TC1301AHTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHTF	-	TC1301AHTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHUA	-	TC1301AHUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHUB	-	TC1301AHUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHUC	-	TC1301AHUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHUD	-	TC1301AHUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHUE	-	TC1301AHUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHUF	-	TC1301AHUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHVA	-	TC1301AHVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHVB	-	TC1301AHVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHVC	-	TC1301AHVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHVD	-	TC1301AHVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHVE	-	TC1301AHVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHVF	-	TC1301AHVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHWA	-	TC1301AHWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHWB	-	TC1301AHWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHWC	-	TC1301AHWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHWD	-	TC1301AHWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHWE	-	TC1301AHWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AHWF	-	TC1301AHWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIAA	-	TC1301AIAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIAB	-	TC1301AIABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AIAC	-	TC1301AIACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIAD	-	TC1301AIADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIAE	-	TC1301AIAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIAF	-	TC1301AIAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIBA	-	TC1301AIBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIBB	-	TC1301AIBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIBC	-	TC1301AIBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIBD	-	TC1301AIBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIBE	-	TC1301AIBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIBF	-	TC1301AIBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AICA	-	TC1301AICAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AICB	-	TC1301AICBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AICC	-	TC1301AICCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AICD	-	TC1301AICDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AICE	-	TC1301AICEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AICF	-	TC1301AICFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIDA	-	TC1301AIDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIDB	-	TC1301AIDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIDC	-	TC1301AIDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIDD	-	TC1301AIDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIDE	-	TC1301AIDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIDF	-	TC1301AIDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIEA	-	TC1301AIEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIEB	-	TC1301AIEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIEC	-	TC1301AIECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIED	-	TC1301AIEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIEE	-	TC1301AIEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIEF	-	TC1301AIEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIFA	-	TC1301AIFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIFB	-	TC1301AIFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIFC	-	TC1301AIFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIFD	-	TC1301AIFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIFE	-	TC1301AIFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIFF	-	TC1301AIFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIGA	-	TC1301AIGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIGB	-	TC1301AIGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIGC	-	TC1301AIGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIGD	-	TC1301AIGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIGE	-	TC1301AIGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIGF	-	TC1301AIGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIHA	-	TC1301AIHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIHB	-	TC1301AIHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIHC	-	TC1301AIHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIHD	-	TC1301AIHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIHE	-	TC1301AIHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIHF	-	TC1301AIHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIIA	-	TC1301AIIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIIB	-	TC1301AIIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIIC	-	TC1301AIICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIID	-	TC1301AIIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIIE	-	TC1301AIIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIIF	-	TC1301AIIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIJA	-	TC1301AIJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIJB	-	TC1301AIJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIJC	-	TC1301AIJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIJD	-	TC1301AIJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIJE	-	TC1301AIJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIJF	-	TC1301AIJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIKA	-	TC1301AIKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIKB	-	TC1301AIKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIKC	-	TC1301AIKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIKD	-	TC1301AIKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIKE	-	TC1301AIKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIKF	-	TC1301AIKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AILA	-	TC1301AILAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AILB	-	TC1301AILBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AILC	-	TC1301AILCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AILD	-	TC1301AILDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AILE	-	TC1301AILEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AILF	-	TC1301AILFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AIMA	-	TC1301AIMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIMB	-	TC1301AIMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIMC	-	TC1301AIMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIMD	-	TC1301AIMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIME	-	TC1301AIMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIMF	-	TC1301AIMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AINA	-	TC1301AINAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AINB	-	TC1301AINBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AINC	-	TC1301AINCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIND	-	TC1301AINDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AINE	-	TC1301AINEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AINF	-	TC1301AINFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIOA	-	TC1301AIOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIOB	-	TC1301AIOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIOC	-	TC1301AIOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIOD	-	TC1301AIODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIOE	-	TC1301AIOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIOF	-	TC1301AIOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIPA	-	TC1301AIPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIPB	-	TC1301AIPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIPC	-	TC1301AIPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIPD	-	TC1301AIPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIPE	-	TC1301AIPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIPF	-	TC1301AIPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIQA	-	TC1301AIQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIQB	-	TC1301AIQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIQC	-	TC1301AIQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIQD	-	TC1301AIQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIQE	-	TC1301AIQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIQF	-	TC1301AIQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIRA	-	TC1301AIRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIRB	-	TC1301AIRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIRC	-	TC1301AIRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIRD	-	TC1301AIRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIRE	-	TC1301AIREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIRF	-	TC1301AIRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AISA	-	TC1301AISAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AISB	-	TC1301AISBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AISC	-	TC1301AISCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AISD	-	TC1301AISDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AISE	-	TC1301AISEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AISF	-	TC1301AISFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AITA	-	TC1301AITAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AITB	-	TC1301AITBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AITC	-	TC1301AITCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AITD	-	TC1301AITDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AITE	-	TC1301AITEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AITF	-	TC1301AITFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIUA	-	TC1301AIUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIUB	-	TC1301AIUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIUC	-	TC1301AIUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIUD	-	TC1301AIUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIUE	-	TC1301AIUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIUF	-	TC1301AIUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIVA	-	TC1301AIVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIVB	-	TC1301AIVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIVC	-	TC1301AIVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIVD	-	TC1301AIVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIVE	-	TC1301AIVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIVF	-	TC1301AIVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIWA	-	TC1301AIWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIWB	-	TC1301AIWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIWC	-	TC1301AIWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIWD	-	TC1301AIWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIWE	-	TC1301AIWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AIWF	-	TC1301AIWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJAA	-	TC1301AJAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJAB	-	TC1301AJABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJAC	-	TC1301AJACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJAD	-	TC1301AJADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AJAE	-	TC1301AJAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJAF	-	TC1301AJAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJBA	-	TC1301AJBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJBB	-	TC1301AJBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJBC	-	TC1301AJBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJBD	-	TC1301AJBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJBE	-	TC1301AJBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJBF	-	TC1301AJBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJCA	-	TC1301AJCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJCB	-	TC1301AJCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJCC	-	TC1301AJCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJCD	-	TC1301AJCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJCE	-	TC1301AJCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJCF	-	TC1301AJCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJDA	-	TC1301AJDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJDB	-	TC1301AJDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJDC	-	TC1301AJDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJDD	-	TC1301AJDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJDE	-	TC1301AJDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJDF	-	TC1301AJDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJEA	-	TC1301AJEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJEB	-	TC1301AJEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJEC	-	TC1301AJECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJED	-	TC1301AJEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJEE	-	TC1301AJEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJEF	-	TC1301AJEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJFA	-	TC1301AJFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJFB	-	TC1301AJFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJFC	-	TC1301AJFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJFD	-	TC1301AJFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJFE	-	TC1301AJFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJFF	-	TC1301AJFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJGA	-	TC1301AJGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJGB	-	TC1301AJGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJGC	-	TC1301AJGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJGD	-	TC1301AJGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJGE	-	TC1301AJGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJGF	-	TC1301AJGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJHA	-	TC1301AJHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJHB	-	TC1301AJHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJHC	-	TC1301AJHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJHD	-	TC1301AJHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJHE	-	TC1301AJHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJHF	-	TC1301AJHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJIA	-	TC1301AJIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJIB	-	TC1301AJIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJIC	-	TC1301AJICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJID	-	TC1301AJIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJIE	-	TC1301AJIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJIF	-	TC1301AJIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJJA	-	TC1301AJJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJJB	-	TC1301AJJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJJC	-	TC1301AJJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJJD	-	TC1301AJJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJJE	-	TC1301AJJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJJF	-	TC1301AJJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJKA	-	TC1301AJKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJKB	-	TC1301AJKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJKC	-	TC1301AJKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJKD	-	TC1301AJKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJKE	-	TC1301AJKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJKF	-	TC1301AJKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJLA	-	TC1301AJLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJLB	-	TC1301AJLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJLC	-	TC1301AJLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJLD	-	TC1301AJLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJLE	-	TC1301AJLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJLF	-	TC1301AJLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJMA	-	TC1301AJMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJMB	-	TC1301AJMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AJMC	-	TC1301AJMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJMD	-	TC1301AJMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJME	-	TC1301AJMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJMF	-	TC1301AJMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJNA	-	TC1301AJNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJNB	-	TC1301AJNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJNC	-	TC1301AJNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJND	-	TC1301AJNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJNE	-	TC1301AJNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJNF	-	TC1301AJNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJOA	-	TC1301AJOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJOB	-	TC1301AJOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJOC	-	TC1301AJOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJOD	-	TC1301AJODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJOE	-	TC1301AJOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJOF	-	TC1301AJOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJPA	-	TC1301AJPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJPB	-	TC1301AJPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJPC	-	TC1301AJPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJPD	-	TC1301AJPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJPE	-	TC1301AJPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJPF	-	TC1301AJPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJQA	-	TC1301AJQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJQB	-	TC1301AJQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJQC	-	TC1301AJQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJQD	-	TC1301AJQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJQE	-	TC1301AJQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJQF	-	TC1301AJQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJRA	-	TC1301AJRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJRB	-	TC1301AJRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJRC	-	TC1301AJRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJRD	-	TC1301AJRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJRE	-	TC1301AJREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJRF	-	TC1301AJRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJSA	-	TC1301AJSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJSB	-	TC1301AJSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJSC	-	TC1301AJSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJSD	-	TC1301AJSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJSE	-	TC1301AJSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJSF	-	TC1301AJSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJTA	-	TC1301AJTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJTB	-	TC1301AJTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJTC	-	TC1301AJTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJTD	-	TC1301AJTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJTE	-	TC1301AJTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJTF	-	TC1301AJTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJUA	-	TC1301AJUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJUB	-	TC1301AJUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJUC	-	TC1301AJUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJUD	-	TC1301AJUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJUE	-	TC1301AJUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJUF	-	TC1301AJUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJVA	-	TC1301AJVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJVB	-	TC1301AJVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJVC	-	TC1301AJVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJVD	-	TC1301AJVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJVE	-	TC1301AJVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJVF	-	TC1301AJVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJWA	-	TC1301AJWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJWB	-	TC1301AJWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJWC	-	TC1301AJWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJWD	-	TC1301AJWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJWE	-	TC1301AJWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AJWF	-	TC1301AJWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKAA	-	TC1301AKAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKAB	-	TC1301AKABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKAC	-	TC1301AKACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKAD	-	TC1301AKADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKAE	-	TC1301AKAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKAF	-	TC1301AKAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AKBA	-	TC1301AKBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKBB	-	TC1301AKBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKBC	-	TC1301AKBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKBD	-	TC1301AKBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKBE	-	TC1301AKBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKBF	-	TC1301AKBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKCA	-	TC1301AKCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKCB	-	TC1301AKCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKCC	-	TC1301AKCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKCD	-	TC1301AKCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKCE	-	TC1301AKCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKCF	-	TC1301AKCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKDA	-	TC1301AKDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKDB	-	TC1301AKDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKDC	-	TC1301AKDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKDD	-	TC1301AKDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKDE	-	TC1301AKDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKDF	-	TC1301AKDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKEA	-	TC1301AKEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKEB	-	TC1301AKEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKEC	-	TC1301AKECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKED	-	TC1301AKEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKEE	-	TC1301AKEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKEF	-	TC1301AKEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKFA	-	TC1301AKFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKFB	-	TC1301AKFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKFC	-	TC1301AKFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKFD	-	TC1301AKFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKFE	-	TC1301AKFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKFF	-	TC1301AKFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKGA	-	TC1301AKGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKGB	-	TC1301AKGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKGC	-	TC1301AKGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKGD	-	TC1301AKGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKGE	-	TC1301AKGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKGF	-	TC1301AKGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKHA	-	TC1301AKHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKHB	-	TC1301AKHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKHC	-	TC1301AKHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKHD	-	TC1301AKHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKHE	-	TC1301AKHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKHF	-	TC1301AKHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKIA	-	TC1301AKIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKIB	-	TC1301AKIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKIC	-	TC1301AKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKID	-	TC1301AKIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKIE	-	TC1301AKIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKIF	-	TC1301AKIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKJA	-	TC1301AKJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKJB	-	TC1301AKJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKJC	-	TC1301AKJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKJD	-	TC1301AKJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKJE	-	TC1301AKJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKJF	-	TC1301AKJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKKA	-	TC1301AKKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKKB	-	TC1301AKKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKKC	-	TC1301AKKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKKD	-	TC1301AKKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKKE	-	TC1301AKKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKKF	-	TC1301AKKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKLA	-	TC1301AKLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKLB	-	TC1301AKLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKLC	-	TC1301AKLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKLD	-	TC1301AKLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKLE	-	TC1301AKLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKLF	-	TC1301AKLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKMA	-	TC1301AKMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKMB	-	TC1301AKMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKMC	-	TC1301AKMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKMD	-	TC1301AKMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AKME	-	TC1301AKMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKMF	-	TC1301AKMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKNA	-	TC1301AKNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKNB	-	TC1301AKNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKNC	-	TC1301AKNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKND	-	TC1301AKNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKNE	-	TC1301AKNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKNF	-	TC1301AKNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKOA	-	TC1301AKOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKOB	-	TC1301AKOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKOC	-	TC1301AKOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKOD	-	TC1301AKODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKOE	-	TC1301AKOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKOF	-	TC1301AKOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKPA	-	TC1301AKPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKPB	-	TC1301AKPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKPC	-	TC1301AKPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKPD	-	TC1301AKPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKPE	-	TC1301AKPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKPF	-	TC1301AKPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKQA	-	TC1301AKQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKQB	-	TC1301AKQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKQC	-	TC1301AKQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKQD	-	TC1301AKQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKQE	-	TC1301AKQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKQF	-	TC1301AKQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKRA	-	TC1301AKRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKRB	-	TC1301AKRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKRC	-	TC1301AKRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKRD	-	TC1301AKRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKRE	-	TC1301AKREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKRF	-	TC1301AKRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKSA	-	TC1301AKSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKSB	-	TC1301AKSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKSC	-	TC1301AKSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKSD	-	TC1301AKSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKSE	-	TC1301AKSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKSF	-	TC1301AKSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKTA	-	TC1301AKTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKTB	-	TC1301AKTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKTC	-	TC1301AKTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKTD	-	TC1301AKTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKTE	-	TC1301AKTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKTF	-	TC1301AKTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKUA	-	TC1301AKUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKUB	-	TC1301AKUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKUC	-	TC1301AKUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKUD	-	TC1301AKUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKUE	-	TC1301AKUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKUF	-	TC1301AKUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKVA	-	TC1301AKVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKVB	-	TC1301AKVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKVC	-	TC1301AKVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKVD	-	TC1301AKVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKVE	-	TC1301AKVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKVF	-	TC1301AKVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKWA	-	TC1301AKWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKWB	-	TC1301AKWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKWC	-	TC1301AKWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKWD	-	TC1301AKWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKWE	-	TC1301AKWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AKWF	-	TC1301AKWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALAA	-	TC1301ALAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALAB	-	TC1301ALABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALAC	-	TC1301ALACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALAD	-	TC1301ALADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALAE	-	TC1301ALAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALAF	-	TC1301ALAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALBA	-	TC1301ALBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALBB	-	TC1301ALBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31ALBC	-	TC1301ALBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALBD	-	TC1301ALBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALBE	-	TC1301ALBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALBF	-	TC1301ALBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALCA	-	TC1301ALCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALCB	-	TC1301ALCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALCC	-	TC1301ALCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALCD	-	TC1301ALCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALCE	-	TC1301ALCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALCF	-	TC1301ALCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALDA	-	TC1301ALDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALDB	-	TC1301ALDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALDC	-	TC1301ALDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALDD	-	TC1301ALDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALDE	-	TC1301ALDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALDF	-	TC1301ALDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALEA	-	TC1301ALEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALEB	-	TC1301ALEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALEC	-	TC1301ALECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALED	-	TC1301ALEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALEE	-	TC1301ALEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALEF	-	TC1301ALEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALFA	-	TC1301ALFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALFB	-	TC1301ALFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALFC	-	TC1301ALFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALFD	-	TC1301ALFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALFE	-	TC1301ALFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALFF	-	TC1301ALFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALGA	-	TC1301ALGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALGB	-	TC1301ALGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALGC	-	TC1301ALGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALGD	-	TC1301ALGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALGE	-	TC1301ALGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALGF	-	TC1301ALGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALHA	-	TC1301ALHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALHB	-	TC1301ALHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALHC	-	TC1301ALHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALHD	-	TC1301ALHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALHE	-	TC1301ALHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALHF	-	TC1301ALHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALIA	-	TC1301ALIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALIB	-	TC1301ALIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALIC	-	TC1301ALICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALID	-	TC1301ALIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALIE	-	TC1301ALIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALIF	-	TC1301ALIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALJA	-	TC1301ALJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALJB	-	TC1301ALJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALJC	-	TC1301ALJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALJD	-	TC1301ALJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALJE	-	TC1301ALJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALJF	-	TC1301ALJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALKA	-	TC1301ALKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALKB	-	TC1301ALKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALKC	-	TC1301ALKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALKD	-	TC1301ALKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALKE	-	TC1301ALKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALKF	-	TC1301ALKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALLA	-	TC1301ALLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALLB	-	TC1301ALLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALLC	-	TC1301ALLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALLD	-	TC1301ALLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALLE	-	TC1301ALLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALLF	-	TC1301ALLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALMA	-	TC1301ALMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALMB	-	TC1301ALMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALMC	-	TC1301ALMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALMD	-	TC1301ALMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALME	-	TC1301ALMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALMF	-	TC1301ALMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31ALNA	-	TC1301ALNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALNB	-	TC1301ALNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALNC	-	TC1301ALNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALND	-	TC1301ALNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALNE	-	TC1301ALNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALNF	-	TC1301ALNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALOA	-	TC1301ALOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALOB	-	TC1301ALOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALOC	-	TC1301ALOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALOD	-	TC1301ALODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALOE	-	TC1301ALOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALOF	-	TC1301ALOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALPA	-	TC1301ALPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALPB	-	TC1301ALPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALPC	-	TC1301ALPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALPD	-	TC1301ALPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALPE	-	TC1301ALPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALPF	-	TC1301ALPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALQA	-	TC1301ALQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALQB	-	TC1301ALQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALQC	-	TC1301ALQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALQD	-	TC1301ALQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALQE	-	TC1301ALQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALQF	-	TC1301ALQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALRA	-	TC1301ALRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALRB	-	TC1301ALRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALRC	-	TC1301ALRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALRD	-	TC1301ALRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALRE	-	TC1301ALREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALRF	-	TC1301ALRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALSA	-	TC1301ALSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALSB	-	TC1301ALSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALSC	-	TC1301ALSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALSD	-	TC1301ALSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALSE	-	TC1301ALSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALSF	-	TC1301ALSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALTA	-	TC1301ALTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALTB	-	TC1301ALTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALTC	-	TC1301ALTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALTD	-	TC1301ALTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALTE	-	TC1301ALTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALTF	-	TC1301ALTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALUA	-	TC1301ALUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALUB	-	TC1301ALUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALUC	-	TC1301ALUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALUD	-	TC1301ALUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALUE	-	TC1301ALUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALUF	-	TC1301ALUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALVA	-	TC1301ALVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALVB	-	TC1301ALVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALVC	-	TC1301ALVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALVD	-	TC1301ALVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALVE	-	TC1301ALVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALVF	-	TC1301ALVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALWA	-	TC1301ALWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALWB	-	TC1301ALWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALWC	-	TC1301ALWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALWD	-	TC1301ALWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALWE	-	TC1301ALWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ALWF	-	TC1301ALWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMAA	-	TC1301AMAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMAB	-	TC1301AMABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMAC	-	TC1301AMACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMAD	-	TC1301AMADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMAE	-	TC1301AMAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMAF	-	TC1301AMAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMBA	-	TC1301AMBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMBB	-	TC1301AMBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMBC	-	TC1301AMBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMBD	-	TC1301AMBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AMBE	-	TC1301AMBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMBF	-	TC1301AMBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMCA	-	TC1301AMCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMCB	-	TC1301AMCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMCC	-	TC1301AMCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMCD	-	TC1301AMCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMCE	-	TC1301AMCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMCF	-	TC1301AMCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMDA	-	TC1301AMDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMDB	-	TC1301AMDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMDC	-	TC1301AMDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMDD	-	TC1301AMDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMDE	-	TC1301AMDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMDF	-	TC1301AMDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMEA	-	TC1301AMEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMEB	-	TC1301AMEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMEC	-	TC1301AMECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMED	-	TC1301AMEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMEE	-	TC1301AMEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMEF	-	TC1301AMEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMFA	-	TC1301AMFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMFB	-	TC1301AMFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMFC	-	TC1301AMFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMFD	-	TC1301AMFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMFE	-	TC1301AMFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMFF	-	TC1301AMFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMGA	-	TC1301AMGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMGB	-	TC1301AMGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMGC	-	TC1301AMGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMGD	-	TC1301AMGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMGE	-	TC1301AMGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMGF	-	TC1301AMGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMHA	-	TC1301AMHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMHB	-	TC1301AMHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMHC	-	TC1301AMHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMHD	-	TC1301AMHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMHE	-	TC1301AMHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMHF	-	TC1301AMHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMIA	-	TC1301AMIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMIB	-	TC1301AMIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMIC	-	TC1301AMICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMID	-	TC1301AMIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMIE	-	TC1301AMIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMIF	-	TC1301AMIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMJA	-	TC1301AMJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMJB	-	TC1301AMJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMJC	-	TC1301AMJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMJD	-	TC1301AMJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMJE	-	TC1301AMJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMJF	-	TC1301AMJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMKA	-	TC1301AMKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMKB	-	TC1301AMKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMKC	-	TC1301AMKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMKD	-	TC1301AMKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMKE	-	TC1301AMKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMKF	-	TC1301AMKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMLA	-	TC1301AMLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMLB	-	TC1301AMLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMLC	-	TC1301AMLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMLD	-	TC1301AMLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMLE	-	TC1301AMLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMLF	-	TC1301AMLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMMA	-	TC1301AMMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMMB	-	TC1301AMMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMMC	-	TC1301AMMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMMD	-	TC1301AMMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMME	-	TC1301AMMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMMF	-	TC1301AMMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMNA	-	TC1301AMNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMNB	-	TC1301AMNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AMNC	-	TC1301AMNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMND	-	TC1301AMNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMNE	-	TC1301AMNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMNF	-	TC1301AMNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMOA	-	TC1301AMOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMOB	-	TC1301AMOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMOC	-	TC1301AMOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMOD	-	TC1301AMODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMOE	-	TC1301AMOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMOF	-	TC1301AMOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMPA	-	TC1301AMPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMPB	-	TC1301AMPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMPC	-	TC1301AMPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMPD	-	TC1301AMPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMPE	-	TC1301AMPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMPF	-	TC1301AMPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMQA	-	TC1301AMQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMQB	-	TC1301AMQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMQC	-	TC1301AMQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMQD	-	TC1301AMQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMQE	-	TC1301AMQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMQF	-	TC1301AMQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMRA	-	TC1301AMRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMRB	-	TC1301AMRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMRC	-	TC1301AMRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMRD	-	TC1301AMRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMRE	-	TC1301AMREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMRF	-	TC1301AMRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMSA	-	TC1301AMSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMSB	-	TC1301AMSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMSC	-	TC1301AMSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMSD	-	TC1301AMSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMSE	-	TC1301AMSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMSF	-	TC1301AMSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMTA	-	TC1301AMTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMTB	-	TC1301AMTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMTC	-	TC1301AMTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMTD	-	TC1301AMTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMTE	-	TC1301AMTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMTF	-	TC1301AMTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMUA	-	TC1301AMUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMUB	-	TC1301AMUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMUC	-	TC1301AMUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMUD	-	TC1301AMUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMUE	-	TC1301AMUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMUF	-	TC1301AMUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMVA	-	TC1301AMVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMVB	-	TC1301AMVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMVC	-	TC1301AMVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMVD	-	TC1301AMVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMVE	-	TC1301AMVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMVF	-	TC1301AMVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMWA	-	TC1301AMWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMWB	-	TC1301AMWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMWC	-	TC1301AMWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMWD	-	TC1301AMWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMWE	-	TC1301AMWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AMWF	-	TC1301AMWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANAA	-	TC1301ANAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANAB	-	TC1301ANABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANAC	-	TC1301ANACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANAD	-	TC1301ANADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANAE	-	TC1301ANAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANAF	-	TC1301ANAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANBA	-	TC1301ANBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANBB	-	TC1301ANBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANBC	-	TC1301ANBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANBD	-	TC1301ANBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANBE	-	TC1301ANBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANBF	-	TC1301ANBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31ANCA	-	TC1301ANCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANCB	-	TC1301ANCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANCC	-	TC1301ANCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANCD	-	TC1301ANCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANCE	-	TC1301ANCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANCF	-	TC1301ANCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANDA	-	TC1301ANDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANDB	-	TC1301ANDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANDC	-	TC1301ANDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANDD	-	TC1301ANDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANDE	-	TC1301ANDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANDF	-	TC1301ANDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANEA	-	TC1301ANEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANEB	-	TC1301ANEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANEC	-	TC1301ANECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANED	-	TC1301ANEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANEE	-	TC1301ANEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANEF	-	TC1301ANEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANFA	-	TC1301ANFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANFB	-	TC1301ANFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANFC	-	TC1301ANFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANFD	-	TC1301ANFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANFE	-	TC1301ANFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANFF	-	TC1301ANFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANGA	-	TC1301ANGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANGB	-	TC1301ANGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANGC	-	TC1301ANGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANGD	-	TC1301ANGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANGE	-	TC1301ANGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANGF	-	TC1301ANGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANHA	-	TC1301ANHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANHB	-	TC1301ANHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANHC	-	TC1301ANHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANHD	-	TC1301ANHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANHE	-	TC1301ANHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANHF	-	TC1301ANHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANIA	-	TC1301ANIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANIB	-	TC1301ANIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANIC	-	TC1301ANICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANID	-	TC1301ANIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANIE	-	TC1301ANIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANIF	-	TC1301ANIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANJA	-	TC1301ANJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANJB	-	TC1301ANJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANJC	-	TC1301ANJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANJD	-	TC1301ANJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANJE	-	TC1301ANJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANJF	-	TC1301ANJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANKA	-	TC1301ANKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANKB	-	TC1301ANKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANKC	-	TC1301ANKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANKD	-	TC1301ANKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANKE	-	TC1301ANKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANKF	-	TC1301ANKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANLA	-	TC1301ANLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANLB	-	TC1301ANLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANLC	-	TC1301ANLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANLD	-	TC1301ANLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANLE	-	TC1301ANLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANLF	-	TC1301ANLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANMA	-	TC1301ANMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANMB	-	TC1301ANMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANMC	-	TC1301ANMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANMD	-	TC1301ANMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANME	-	TC1301ANMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANMF	-	TC1301ANMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANNA	-	TC1301ANNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANNB	-	TC1301ANNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANNC	-	TC1301ANNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANND	-	TC1301ANNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31ANNE	-	TC1301ANNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANNF	-	TC1301ANNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANOA	-	TC1301ANOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANOB	-	TC1301ANOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANOC	-	TC1301ANOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANOD	-	TC1301ANODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANOE	-	TC1301ANOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANOF	-	TC1301ANOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANPA	-	TC1301ANPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANPB	-	TC1301ANPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANPC	-	TC1301ANPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANPD	-	TC1301ANPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANPE	-	TC1301ANPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANPF	-	TC1301ANPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANQA	-	TC1301ANQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANQB	-	TC1301ANQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANQC	-	TC1301ANQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANQD	-	TC1301ANQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANQE	-	TC1301ANQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANQF	-	TC1301ANQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANRA	-	TC1301ANRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANRB	-	TC1301ANRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANRC	-	TC1301ANRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANRD	-	TC1301ANRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANRE	-	TC1301ANREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANRF	-	TC1301ANRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANSA	-	TC1301ANSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANSB	-	TC1301ANSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANSC	-	TC1301ANSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANSD	-	TC1301ANSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANSE	-	TC1301ANSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANSF	-	TC1301ANSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANTA	-	TC1301ANTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANTB	-	TC1301ANTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANTC	-	TC1301ANTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANTD	-	TC1301ANTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANTE	-	TC1301ANTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANTF	-	TC1301ANTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANUA	-	TC1301ANUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANUB	-	TC1301ANUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANUC	-	TC1301ANUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANUD	-	TC1301ANUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANUE	-	TC1301ANUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANUF	-	TC1301ANUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANVA	-	TC1301ANVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANVB	-	TC1301ANVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANVC	-	TC1301ANVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANVD	-	TC1301ANVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANVE	-	TC1301ANVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANVF	-	TC1301ANVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANWA	-	TC1301ANWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANWB	-	TC1301ANWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANWC	-	TC1301ANWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANWD	-	TC1301ANWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANWE	-	TC1301ANWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ANWF	-	TC1301ANWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOAA	-	TC1301AOAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOAB	-	TC1301AOABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOAC	-	TC1301AOACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOAD	-	TC1301AOADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOAE	-	TC1301AOAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOAF	-	TC1301AOAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOBA	-	TC1301AOBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOBB	-	TC1301AOBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOBC	-	TC1301AOBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOBD	-	TC1301AOBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOBE	-	TC1301AOBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOBF	-	TC1301AOBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOCA	-	TC1301AOCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOCB	-	TC1301AOCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AOCC	-	TC1301AOCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOCD	-	TC1301AOCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOCE	-	TC1301AOCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOCF	-	TC1301AOCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AODA	-	TC1301AODAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AODB	-	TC1301AODBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AODC	-	TC1301AODCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AODD	-	TC1301AODDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AODE	-	TC1301AODEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AODF	-	TC1301AODFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOEA	-	TC1301AOEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOEB	-	TC1301AOEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOEC	-	TC1301AOECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOED	-	TC1301AOEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOEE	-	TC1301AOEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOEF	-	TC1301AOEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOFA	-	TC1301AOFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOFB	-	TC1301AOFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOFC	-	TC1301AOFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOFD	-	TC1301AOFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOFE	-	TC1301AOFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOFF	-	TC1301AOFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOGA	-	TC1301AOGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOGB	-	TC1301AOGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOGC	-	TC1301AOGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOGD	-	TC1301AOGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOGE	-	TC1301AOGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOGF	-	TC1301AOGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOHA	-	TC1301AOHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOHB	-	TC1301AOHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOHC	-	TC1301AOHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOHD	-	TC1301AOHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOHE	-	TC1301AOHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOHF	-	TC1301AOHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOIA	-	TC1301AOIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOIB	-	TC1301AOIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOIC	-	TC1301AOICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOID	-	TC1301AOIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOIE	-	TC1301AOIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOIF	-	TC1301AOIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOJA	-	TC1301AOJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOJB	-	TC1301AOJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOJC	-	TC1301AOJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOJD	-	TC1301AOJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOJE	-	TC1301AOJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOJF	-	TC1301AOJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOKA	-	TC1301AOKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOKB	-	TC1301AOKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOKC	-	TC1301AOKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOKD	-	TC1301AOKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOKE	-	TC1301AOKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOKF	-	TC1301AOKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOLA	-	TC1301AOLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOLB	-	TC1301AOLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOLC	-	TC1301AOLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOLD	-	TC1301AOLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOLE	-	TC1301AOLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOLF	-	TC1301AOLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOMA	-	TC1301AOMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOMB	-	TC1301AOMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOMC	-	TC1301AOMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOMD	-	TC1301AOMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOME	-	TC1301AOMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOMF	-	TC1301AOMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AONA	-	TC1301AONAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AONB	-	TC1301AONBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AONC	-	TC1301AONCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOND	-	TC1301AONDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AONE	-	TC1301AONEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AONF	-	TC1301AONFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AOOA	-	TC1301AOOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOOB	-	TC1301AOOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOOC	-	TC1301AOOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOOD	-	TC1301AOODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOOE	-	TC1301AOOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOOF	-	TC1301AOOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOPA	-	TC1301AOPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOPB	-	TC1301AOPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOPC	-	TC1301AOPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOPD	-	TC1301AOPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOPE	-	TC1301AOPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOPF	-	TC1301AOPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOQA	-	TC1301AOQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOQB	-	TC1301AOQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOQC	-	TC1301AOQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOQD	-	TC1301AOQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOQE	-	TC1301AOQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOQF	-	TC1301AOQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AORA	-	TC1301AORAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AORB	-	TC1301AORBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AORC	-	TC1301AORCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AORD	-	TC1301AORDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AORE	-	TC1301AOREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AORF	-	TC1301AORFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOSA	-	TC1301AOSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOSB	-	TC1301AOSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOSC	-	TC1301AOSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOSD	-	TC1301AOSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOSE	-	TC1301AOSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOSF	-	TC1301AOSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOTA	-	TC1301AOTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOTB	-	TC1301AOTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOTC	-	TC1301AOTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOTD	-	TC1301AOTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOTE	-	TC1301AOTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOTF	-	TC1301AOTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOUA	-	TC1301AOUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOUB	-	TC1301AOUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOUC	-	TC1301AOUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOUD	-	TC1301AOUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOUE	-	TC1301AOUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOUF	-	TC1301AOUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOVA	-	TC1301AOVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOVB	-	TC1301AOVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOVC	-	TC1301AOVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOVD	-	TC1301AOVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOVE	-	TC1301AOVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOVF	-	TC1301AOVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOWA	-	TC1301AOWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOWB	-	TC1301AOWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOWC	-	TC1301AOWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOWD	-	TC1301AOWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOWE	-	TC1301AOWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AOWF	-	TC1301AOWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APAA	-	TC1301APAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APAB	-	TC1301APABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APAC	-	TC1301APACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APAD	-	TC1301APADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APAE	-	TC1301APAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APAF	-	TC1301APAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APBA	-	TC1301APBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APBB	-	TC1301APBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APBC	-	TC1301APBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APBD	-	TC1301APBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APBE	-	TC1301APBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APBF	-	TC1301APBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APCA	-	TC1301APCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APCB	-	TC1301APCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APCC	-	TC1301APCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APCD	-	TC1301APCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31APCE	-	TC1301APCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APCF	-	TC1301APCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APDA	-	TC1301APDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APDB	-	TC1301APDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APDC	-	TC1301APDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APDD	-	TC1301APDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APDE	-	TC1301APDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APDF	-	TC1301APDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APEA	-	TC1301APEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APEB	-	TC1301APEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APEC	-	TC1301APECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APED	-	TC1301APEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APEE	-	TC1301APEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APEF	-	TC1301APEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APFA	-	TC1301APFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APFB	-	TC1301APFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APFC	-	TC1301APFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APFD	-	TC1301APFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APFE	-	TC1301APFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APFF	-	TC1301APFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APGA	-	TC1301APGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APGB	-	TC1301APGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APGC	-	TC1301APGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APGD	-	TC1301APGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APGE	-	TC1301APGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APGF	-	TC1301APGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APHA	-	TC1301APHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APHB	-	TC1301APHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APHC	-	TC1301APHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APHD	-	TC1301APHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APHE	-	TC1301APHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APHF	-	TC1301APHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APIA	-	TC1301APIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APIB	-	TC1301APIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APIC	-	TC1301APICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APID	-	TC1301APIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APIE	-	TC1301APIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APIF	-	TC1301APIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APJA	-	TC1301APJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APJB	-	TC1301APJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APJC	-	TC1301APJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APJD	-	TC1301APJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APJE	-	TC1301APJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APJF	-	TC1301APJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APKA	-	TC1301APKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APKB	-	TC1301APKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APKC	-	TC1301APKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APKD	-	TC1301APKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APKE	-	TC1301APKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APKF	-	TC1301APKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APLA	-	TC1301APLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APLB	-	TC1301APLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APLC	-	TC1301APLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APLD	-	TC1301APLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APLE	-	TC1301APLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APLF	-	TC1301APLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APMA	-	TC1301APMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APMB	-	TC1301APMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APMC	-	TC1301APMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APMD	-	TC1301APMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APME	-	TC1301APMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APMF	-	TC1301APMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APNA	-	TC1301APNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APNB	-	TC1301APNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APNC	-	TC1301APNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APND	-	TC1301APNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APNE	-	TC1301APNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APNF	-	TC1301APNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APOA	-	TC1301APOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APOB	-	TC1301APOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31APOC	-	TC1301APOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APOD	-	TC1301APODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APOE	-	TC1301APOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APOF	-	TC1301APOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APPA	-	TC1301APPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APPB	-	TC1301APPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APPC	-	TC1301APPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APPD	-	TC1301APPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APPE	-	TC1301APPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APPF	-	TC1301APPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APQA	-	TC1301APQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APQB	-	TC1301APQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APQC	-	TC1301APQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APQD	-	TC1301APQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APQE	-	TC1301APQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APQF	-	TC1301APQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APRA	-	TC1301APRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APRB	-	TC1301APRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APRC	-	TC1301APRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APRD	-	TC1301APRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APRE	-	TC1301APREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APRF	-	TC1301APRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APSA	-	TC1301APSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APSB	-	TC1301APSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APSC	-	TC1301APSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APSD	-	TC1301APSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APSE	-	TC1301APSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APSF	-	TC1301APSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APTA	-	TC1301APTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APTB	-	TC1301APTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APTC	-	TC1301APTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APTD	-	TC1301APTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APTE	-	TC1301APTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APTF	-	TC1301APTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APUA	-	TC1301APUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APUB	-	TC1301APUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APUC	-	TC1301APUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APUD	-	TC1301APUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APUE	-	TC1301APUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APUF	-	TC1301APUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APVA	-	TC1301APVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APVB	-	TC1301APVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APVC	-	TC1301APVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APVD	-	TC1301APVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APVE	-	TC1301APVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APVF	-	TC1301APVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APWA	-	TC1301APWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APWB	-	TC1301APWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APWC	-	TC1301APWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APWD	-	TC1301APWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APWE	-	TC1301APWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31APWF	-	TC1301APWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQAA	-	TC1301AQAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQAB	-	TC1301AQABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQAC	-	TC1301AQACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQAD	-	TC1301AQADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQAE	-	TC1301AQAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQAF	-	TC1301AQAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQBA	-	TC1301AQBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQBB	-	TC1301AQBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQBC	-	TC1301AQBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQBD	-	TC1301AQBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQBE	-	TC1301AQBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQBF	-	TC1301AQBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQCA	-	TC1301AQCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQCB	-	TC1301AQCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQCC	-	TC1301AQCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQCD	-	TC1301AQCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQCE	-	TC1301AQCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQCF	-	TC1301AQCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AQDA	-	TC1301AQDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQDB	-	TC1301AQDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQDC	-	TC1301AQDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQDD	-	TC1301AQDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQDE	-	TC1301AQDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQDF	-	TC1301AQDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQEA	-	TC1301AQEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQEB	-	TC1301AQEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQEC	-	TC1301AQECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQED	-	TC1301AQEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQEE	-	TC1301AQEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQEF	-	TC1301AQEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQFA	-	TC1301AQFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQFB	-	TC1301AQFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQFC	-	TC1301AQFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQFD	-	TC1301AQFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQFE	-	TC1301AQFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQFF	-	TC1301AQFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQGA	-	TC1301AQGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQGB	-	TC1301AQGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQGC	-	TC1301AQGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQGD	-	TC1301AQGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQGE	-	TC1301AQGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQGF	-	TC1301AQGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQHA	-	TC1301AQHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQHB	-	TC1301AQHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQHC	-	TC1301AQHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQHD	-	TC1301AQHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQHE	-	TC1301AQHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQHF	-	TC1301AQHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQIA	-	TC1301AQIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQIB	-	TC1301AQIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQIC	-	TC1301AQICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQID	-	TC1301AQIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQIE	-	TC1301AQIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQIF	-	TC1301AQIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQJA	-	TC1301AQJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQJB	-	TC1301AQJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQJC	-	TC1301AQJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQJD	-	TC1301AQJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQJE	-	TC1301AQJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQJF	-	TC1301AQJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQKA	-	TC1301AQKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQKB	-	TC1301AQKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQKC	-	TC1301AQKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQKD	-	TC1301AQKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQKE	-	TC1301AQKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQKF	-	TC1301AQKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQLA	-	TC1301AQLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQLB	-	TC1301AQLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQLC	-	TC1301AQLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQLD	-	TC1301AQLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQLE	-	TC1301AQLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQLF	-	TC1301AQLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQMA	-	TC1301AQMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQMB	-	TC1301AQMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQMC	-	TC1301AQMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQMD	-	TC1301AQMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQME	-	TC1301AQMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQMF	-	TC1301AQMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQNA	-	TC1301AQNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQNB	-	TC1301AQNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQNC	-	TC1301AQNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQND	-	TC1301AQNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQNE	-	TC1301AQNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQNF	-	TC1301AQNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQOA	-	TC1301AQOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQOB	-	TC1301AQOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQOC	-	TC1301AQOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQOD	-	TC1301AQODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AQOE	-	TC1301AQOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQOF	-	TC1301AQOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQPA	-	TC1301AQPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQPB	-	TC1301AQPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQPC	-	TC1301AQPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQPD	-	TC1301AQPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQPE	-	TC1301AQPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQPF	-	TC1301AQPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQQA	-	TC1301AQQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQQB	-	TC1301AQQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQQC	-	TC1301AQQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQQD	-	TC1301AQQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQQE	-	TC1301AQQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQQF	-	TC1301AQQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQRA	-	TC1301AQRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQRB	-	TC1301AQRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQRC	-	TC1301AQRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQRD	-	TC1301AQRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQRE	-	TC1301AQREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQRF	-	TC1301AQRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQSA	-	TC1301AQSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQSB	-	TC1301AQSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQSC	-	TC1301AQSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQSD	-	TC1301AQSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQSE	-	TC1301AQSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQSF	-	TC1301AQSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQTA	-	TC1301AQTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQTB	-	TC1301AQTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQTC	-	TC1301AQTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQTD	-	TC1301AQTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQTE	-	TC1301AQTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQTF	-	TC1301AQTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQUA	-	TC1301AQUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQUB	-	TC1301AQUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQUC	-	TC1301AQUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQUD	-	TC1301AQUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQUE	-	TC1301AQUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQUF	-	TC1301AQUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQVA	-	TC1301AQVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQVB	-	TC1301AQVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQVC	-	TC1301AQVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQVD	-	TC1301AQVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQVE	-	TC1301AQVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQVF	-	TC1301AQVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQWA	-	TC1301AQWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQWB	-	TC1301AQWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQWC	-	TC1301AQWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQWD	-	TC1301AQWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQWE	-	TC1301AQWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AQWF	-	TC1301AQWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARAA	-	TC1301ARAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARAB	-	TC1301ARABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARAC	-	TC1301ARACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARAD	-	TC1301ARADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARAE	-	TC1301ARAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARAF	-	TC1301ARAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARBA	-	TC1301ARBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARBB	-	TC1301ARBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARBC	-	TC1301ARBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARBD	-	TC1301ARBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARBE	-	TC1301ARBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARBF	-	TC1301ARBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARCA	-	TC1301ARCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARCB	-	TC1301ARCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARCC	-	TC1301ARCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARCD	-	TC1301ARCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARCE	-	TC1301ARCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARCF	-	TC1301ARCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARDA	-	TC1301ARDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARDB	-	TC1301ARDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31ARDC	-	TC1301ARDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARDD	-	TC1301ARDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARDE	-	TC1301ARDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARDF	-	TC1301ARDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AREA	-	TC1301AREAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AREB	-	TC1301AREBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AREC	-	TC1301ARECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARED	-	TC1301AREDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AREE	-	TC1301AREEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AREF	-	TC1301AREFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARFA	-	TC1301ARFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARFB	-	TC1301ARFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARFC	-	TC1301ARFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARFD	-	TC1301ARFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARFE	-	TC1301ARFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARFF	-	TC1301ARFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARGA	-	TC1301ARGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARGB	-	TC1301ARGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARGC	-	TC1301ARGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARGD	-	TC1301ARGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARGE	-	TC1301ARGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARGF	-	TC1301ARGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARHA	-	TC1301ARHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARHB	-	TC1301ARHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARHC	-	TC1301ARHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARHD	-	TC1301ARHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARHE	-	TC1301ARHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARHF	-	TC1301ARHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARIA	-	TC1301ARIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARIB	-	TC1301ARIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARIC	-	TC1301ARICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARID	-	TC1301ARIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARIE	-	TC1301ARIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARIF	-	TC1301ARIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARJA	-	TC1301ARJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARJB	-	TC1301ARJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARJC	-	TC1301ARJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARJD	-	TC1301ARJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARJE	-	TC1301ARJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARJF	-	TC1301ARJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARKA	-	TC1301ARKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARKB	-	TC1301ARKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARKC	-	TC1301ARKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARKD	-	TC1301ARKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARKE	-	TC1301ARKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARKF	-	TC1301ARKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARLA	-	TC1301ARLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARLB	-	TC1301ARLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARLC	-	TC1301ARLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARLD	-	TC1301ARLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARLE	-	TC1301ARLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARLF	-	TC1301ARLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARMA	-	TC1301ARMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARMB	-	TC1301ARMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARMC	-	TC1301ARMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARMD	-	TC1301ARMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARME	-	TC1301ARMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARMF	-	TC1301ARMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARNA	-	TC1301ARNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARNB	-	TC1301ARNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARNC	-	TC1301ARNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARND	-	TC1301ARNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARNE	-	TC1301ARNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARNF	-	TC1301ARNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AROA	-	TC1301AROAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AROB	-	TC1301AROBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AROC	-	TC1301AROCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AROD	-	TC1301ARODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AROE	-	TC1301AROEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AROF	-	TC1301AROFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31ARPA	-	TC1301ARPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARPB	-	TC1301ARPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARPC	-	TC1301ARPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARPD	-	TC1301ARPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARPE	-	TC1301ARPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARPF	-	TC1301ARPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARQA	-	TC1301ARQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARQB	-	TC1301ARQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARQC	-	TC1301ARQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARQD	-	TC1301ARQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARQE	-	TC1301ARQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARQF	-	TC1301ARQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARRA	-	TC1301ARRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARRB	-	TC1301ARRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARRC	-	TC1301ARRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARRD	-	TC1301ARRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARRE	-	TC1301ARREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARRF	-	TC1301ARRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARSA	-	TC1301ARSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARSB	-	TC1301ARSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARSC	-	TC1301ARSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARSD	-	TC1301ARSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARSE	-	TC1301ARSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARSF	-	TC1301ARSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARTA	-	TC1301ARTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARTB	-	TC1301ARTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARTC	-	TC1301ARTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARTD	-	TC1301ARTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARTE	-	TC1301ARTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARTF	-	TC1301ARTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARUA	-	TC1301ARUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARUB	-	TC1301ARUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARUC	-	TC1301ARUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARUD	-	TC1301ARUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARUE	-	TC1301ARUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARUF	-	TC1301ARUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARVA	-	TC1301ARVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARVB	-	TC1301ARVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARVC	-	TC1301ARVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARVD	-	TC1301ARVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARVE	-	TC1301ARVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARVF	-	TC1301ARVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARWA	-	TC1301ARWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARWB	-	TC1301ARWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARWC	-	TC1301ARWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARWD	-	TC1301ARWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARWE	-	TC1301ARWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ARWF	-	TC1301ARWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASAA	-	TC1301ASAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASAB	-	TC1301ASABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASAC	-	TC1301ASACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASAD	-	TC1301ASADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASAE	-	TC1301ASAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASAF	-	TC1301ASAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASBA	-	TC1301ASBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASBB	-	TC1301ASBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASBC	-	TC1301ASBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASBD	-	TC1301ASBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASBE	-	TC1301ASBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASBF	-	TC1301ASBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASCA	-	TC1301ASCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASCB	-	TC1301ASCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASCC	-	TC1301ASCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASCD	-	TC1301ASCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASCE	-	TC1301ASCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASCF	-	TC1301ASCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASDA	-	TC1301ASDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASDB	-	TC1301ASDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASDC	-	TC1301ASDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASDD	-	TC1301ASDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31ASDE	-	TC1301ASDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASDF	-	TC1301ASDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASEA	-	TC1301ASEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASEB	-	TC1301ASEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASEC	-	TC1301ASECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASED	-	TC1301ASEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASEE	-	TC1301ASEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASEF	-	TC1301ASEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASFA	-	TC1301ASFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASFB	-	TC1301ASFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASFC	-	TC1301ASFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASFD	-	TC1301ASFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASFE	-	TC1301ASFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASFF	-	TC1301ASFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASGA	-	TC1301ASGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASGB	-	TC1301ASGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASGC	-	TC1301ASGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASGD	-	TC1301ASGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASGE	-	TC1301ASGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASGF	-	TC1301ASGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASHA	-	TC1301ASHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASHB	-	TC1301ASHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASHC	-	TC1301ASHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASHD	-	TC1301ASHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASHE	-	TC1301ASHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASHF	-	TC1301ASHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASIA	-	TC1301ASIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASIB	-	TC1301ASIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASIC	-	TC1301ASICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASID	-	TC1301ASIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASIE	-	TC1301ASIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASIF	-	TC1301ASIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASJA	-	TC1301ASJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASJB	-	TC1301ASJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASJC	-	TC1301ASJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASJD	-	TC1301ASJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASJE	-	TC1301ASJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASJF	-	TC1301ASJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASKA	-	TC1301ASKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASKB	-	TC1301ASKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASKC	-	TC1301ASKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASKD	-	TC1301ASKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASKE	-	TC1301ASKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASKF	-	TC1301ASKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASLA	-	TC1301ASLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASLB	-	TC1301ASLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASLC	-	TC1301ASLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASLD	-	TC1301ASLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASLE	-	TC1301ASLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASLF	-	TC1301ASLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASMA	-	TC1301ASMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASMB	-	TC1301ASMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASMC	-	TC1301ASMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASMD	-	TC1301ASMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASME	-	TC1301ASMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASMF	-	TC1301ASMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASNA	-	TC1301ASNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASNB	-	TC1301ASNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASNC	-	TC1301ASNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASND	-	TC1301ASNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASNE	-	TC1301ASNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASNF	-	TC1301ASNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASOA	-	TC1301ASOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASOB	-	TC1301ASOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASOC	-	TC1301ASOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASOD	-	TC1301ASODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASOE	-	TC1301ASOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASOF	-	TC1301ASOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASPA	-	TC1301ASPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASPB	-	TC1301ASPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31ASPC	-	TC1301ASPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASPD	-	TC1301ASPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASPE	-	TC1301ASPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASPF	-	TC1301ASPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASQA	-	TC1301ASQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASQB	-	TC1301ASQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASQC	-	TC1301ASQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASQD	-	TC1301ASQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASQE	-	TC1301ASQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASQF	-	TC1301ASQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASRA	-	TC1301ASRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASRB	-	TC1301ASRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASRC	-	TC1301ASRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASRD	-	TC1301ASRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASRE	-	TC1301ASREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASRF	-	TC1301ASRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASSA	-	TC1301ASSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASSB	-	TC1301ASSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASSC	-	TC1301ASSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASSD	-	TC1301ASSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASSE	-	TC1301ASSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASSF	-	TC1301ASSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASTA	-	TC1301ASTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASTB	-	TC1301ASTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASTC	-	TC1301ASTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASTD	-	TC1301ASTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASTE	-	TC1301ASTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASTF	-	TC1301ASTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASUA	-	TC1301ASUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASUB	-	TC1301ASUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASUC	-	TC1301ASUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASUD	-	TC1301ASUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASUE	-	TC1301ASUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASUF	-	TC1301ASUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASVA	-	TC1301ASVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASVB	-	TC1301ASVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASVC	-	TC1301ASVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASVD	-	TC1301ASVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASVE	-	TC1301ASVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASVF	-	TC1301ASVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASWA	-	TC1301ASWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASWB	-	TC1301ASWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASWC	-	TC1301ASWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASWD	-	TC1301ASWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASWE	-	TC1301ASWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ASWF	-	TC1301ASWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATAA	-	TC1301ATAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATAB	-	TC1301ATABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATAC	-	TC1301ATACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATAD	-	TC1301ATADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATAE	-	TC1301ATAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATAF	-	TC1301ATAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATBA	-	TC1301ATBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATBB	-	TC1301ATBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATBC	-	TC1301ATBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATBD	-	TC1301ATBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATBE	-	TC1301ATBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATBF	-	TC1301ATBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATCA	-	TC1301ATCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATCB	-	TC1301ATCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATCC	-	TC1301ATCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATCD	-	TC1301ATCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATCE	-	TC1301ATCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATCF	-	TC1301ATCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATDA	-	TC1301ATDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATDB	-	TC1301ATDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATDC	-	TC1301ATDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATDD	-	TC1301ATDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATDE	-	TC1301ATDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATDF	-	TC1301ATDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31ATEA	-	TC1301ATEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATEB	-	TC1301ATEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATEC	-	TC1301ATECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATED	-	TC1301ATEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATEE	-	TC1301ATEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATEF	-	TC1301ATEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATFA	-	TC1301ATFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATFB	-	TC1301ATFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATFC	-	TC1301ATFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATFD	-	TC1301ATFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATFE	-	TC1301ATFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATFF	-	TC1301ATFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATGA	-	TC1301ATGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATGB	-	TC1301ATGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATGC	-	TC1301ATGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATGD	-	TC1301ATGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATGE	-	TC1301ATGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATGF	-	TC1301ATGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATHA	-	TC1301ATHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATHB	-	TC1301ATHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATHC	-	TC1301ATHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATHD	-	TC1301ATHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATHE	-	TC1301ATHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATHF	-	TC1301ATHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATIA	-	TC1301ATIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATIB	-	TC1301ATIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATIC	-	TC1301ATICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATID	-	TC1301ATIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATIE	-	TC1301ATIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATIF	-	TC1301ATIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATJA	-	TC1301ATJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATJB	-	TC1301ATJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATJC	-	TC1301ATJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATJD	-	TC1301ATJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATJE	-	TC1301ATJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATJF	-	TC1301ATJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATKA	-	TC1301ATKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATKB	-	TC1301ATKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATKC	-	TC1301ATKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATKD	-	TC1301ATKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATKE	-	TC1301ATKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATKF	-	TC1301ATKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATLA	-	TC1301ATLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATLB	-	TC1301ATLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATLC	-	TC1301ATLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATLD	-	TC1301ATLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATLE	-	TC1301ATLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATLF	-	TC1301ATLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATMA	-	TC1301ATMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATMB	-	TC1301ATMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATMC	-	TC1301ATMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATMD	-	TC1301ATMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATME	-	TC1301ATMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATMF	-	TC1301ATMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATNA	-	TC1301ATNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATNB	-	TC1301ATNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATNC	-	TC1301ATNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATND	-	TC1301ATNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATNE	-	TC1301ATNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATNF	-	TC1301ATNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATOA	-	TC1301ATOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATOB	-	TC1301ATOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATOC	-	TC1301ATOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATOD	-	TC1301ATODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATOE	-	TC1301ATOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATOF	-	TC1301ATOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATPA	-	TC1301ATPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATPB	-	TC1301ATPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATPC	-	TC1301ATPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATPD	-	TC1301ATPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31ATPE	-	TC1301ATPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATPF	-	TC1301ATPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATQA	-	TC1301ATQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATQB	-	TC1301ATQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATQC	-	TC1301ATQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATQD	-	TC1301ATQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATQE	-	TC1301ATQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATQF	-	TC1301ATQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATRA	-	TC1301ATRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATRB	-	TC1301ATRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATRC	-	TC1301ATRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATRD	-	TC1301ATRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATRE	-	TC1301ATREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATRF	-	TC1301ATRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATSA	-	TC1301ATSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATSB	-	TC1301ATSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATSC	-	TC1301ATSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATSD	-	TC1301ATSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATSE	-	TC1301ATSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATSF	-	TC1301ATSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATTA	-	TC1301ATTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATTB	-	TC1301ATTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATTC	-	TC1301ATTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATTD	-	TC1301ATTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATTE	-	TC1301ATTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATTF	-	TC1301ATTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATUA	-	TC1301ATUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATUB	-	TC1301ATUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATUC	-	TC1301ATUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATUD	-	TC1301ATUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATUE	-	TC1301ATUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATUF	-	TC1301ATUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATVA	-	TC1301ATVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATVB	-	TC1301ATVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATVC	-	TC1301ATVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATVD	-	TC1301ATVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATVE	-	TC1301ATVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATVF	-	TC1301ATVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATWA	-	TC1301ATWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATWB	-	TC1301ATWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATWC	-	TC1301ATWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATWD	-	TC1301ATWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATWE	-	TC1301ATWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31ATWF	-	TC1301ATWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUAA	-	TC1301AUAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUAB	-	TC1301AUABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUAC	-	TC1301AUACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUAD	-	TC1301AUADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUAE	-	TC1301AUAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUAF	-	TC1301AUAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUBA	-	TC1301AUBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUBB	-	TC1301AUBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUBC	-	TC1301AUBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUBD	-	TC1301AUBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUBE	-	TC1301AUBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUBF	-	TC1301AUBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUCA	-	TC1301AUCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUCB	-	TC1301AUCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUCC	-	TC1301AUCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUCD	-	TC1301AUCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUCE	-	TC1301AUCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUCF	-	TC1301AUCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUDA	-	TC1301AUDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUDB	-	TC1301AUDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUDC	-	TC1301AUDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUDD	-	TC1301AUDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUDE	-	TC1301AUDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUDF	-	TC1301AUDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUEA	-	TC1301AUEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUEB	-	TC1301AUEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AUEC	-	TC1301AUECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUED	-	TC1301AUEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUEE	-	TC1301AUEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUEF	-	TC1301AUEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUFA	-	TC1301AUFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUFB	-	TC1301AUFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUFC	-	TC1301AUFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUFD	-	TC1301AUFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUFE	-	TC1301AUFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUFF	-	TC1301AUFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUGA	-	TC1301AUGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUGB	-	TC1301AUGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUGC	-	TC1301AUGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUGD	-	TC1301AUGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUGE	-	TC1301AUGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUGF	-	TC1301AUGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUHA	-	TC1301AUHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUHB	-	TC1301AUHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUHC	-	TC1301AUHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUHD	-	TC1301AUHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUHE	-	TC1301AUHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUHF	-	TC1301AUHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUIA	-	TC1301AUIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUIB	-	TC1301AUIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUIC	-	TC1301AUICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUID	-	TC1301AUIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUIE	-	TC1301AUIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUIF	-	TC1301AUIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUJA	-	TC1301AUJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUJB	-	TC1301AUJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUJC	-	TC1301AUJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUJD	-	TC1301AUJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUJE	-	TC1301AUJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUJF	-	TC1301AUJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUKA	-	TC1301AUKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUKB	-	TC1301AUKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUKC	-	TC1301AUKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUKD	-	TC1301AUKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUKE	-	TC1301AUKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUKF	-	TC1301AUKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AULA	-	TC1301AULAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AULB	-	TC1301AULBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AULC	-	TC1301AULCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AULD	-	TC1301AULDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AULE	-	TC1301AULEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AULF	-	TC1301AULFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUMA	-	TC1301AUMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUMB	-	TC1301AUMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUMC	-	TC1301AUMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUMD	-	TC1301AUMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUME	-	TC1301AUMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUMF	-	TC1301AUMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUNA	-	TC1301AUNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUNB	-	TC1301AUNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUNC	-	TC1301AUNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUND	-	TC1301AUNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUNE	-	TC1301AUNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUNF	-	TC1301AUNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUOA	-	TC1301AUOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUOB	-	TC1301AUOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUOC	-	TC1301AUOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUOD	-	TC1301AUODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUOE	-	TC1301AUOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUOF	-	TC1301AUOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUPA	-	TC1301AUPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUPB	-	TC1301AUPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUPC	-	TC1301AUPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUPD	-	TC1301AUPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUPE	-	TC1301AUPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUPF	-	TC1301AUPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AUQA	-	TC1301AUQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUQB	-	TC1301AUQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUQC	-	TC1301AUQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUQD	-	TC1301AUQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUQE	-	TC1301AUQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUQF	-	TC1301AUQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AURA	-	TC1301AURAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AURB	-	TC1301AURBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AURC	-	TC1301AURCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AURD	-	TC1301AURDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AURE	-	TC1301AUREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AURF	-	TC1301AURFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUSA	-	TC1301AUSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUSB	-	TC1301AUSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUSC	-	TC1301AUSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUSD	-	TC1301AUSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUSE	-	TC1301AUSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUSF	-	TC1301AUSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUTA	-	TC1301AUTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUTB	-	TC1301AUTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUTC	-	TC1301AUTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUTD	-	TC1301AUTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUTE	-	TC1301AUTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUTF	-	TC1301AUTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUUA	-	TC1301AUUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUUB	-	TC1301AUUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUUC	-	TC1301AUUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUUD	-	TC1301AUUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUUE	-	TC1301AUUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUUF	-	TC1301AUUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUVA	-	TC1301AUVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUVB	-	TC1301AUVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUVC	-	TC1301AUVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUVD	-	TC1301AUVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUVE	-	TC1301AUVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUVF	-	TC1301AUVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUWA	-	TC1301AUWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUWB	-	TC1301AUWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUWC	-	TC1301AUWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUWD	-	TC1301AUWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUWE	-	TC1301AUWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AUWF	-	TC1301AUWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVAA	-	TC1301AVAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVAB	-	TC1301AVABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVAC	-	TC1301AVACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVAD	-	TC1301AVADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVAE	-	TC1301AVAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVAF	-	TC1301AVAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVBA	-	TC1301AVBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVBB	-	TC1301AVBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVBC	-	TC1301AVBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVBD	-	TC1301AVBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVBE	-	TC1301AVBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVBF	-	TC1301AVBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVCA	-	TC1301AVCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVCB	-	TC1301AVCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVCC	-	TC1301AVCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVCD	-	TC1301AVCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVCE	-	TC1301AVCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVCF	-	TC1301AVCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVDA	-	TC1301AVDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVDB	-	TC1301AVDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVDC	-	TC1301AVDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVDD	-	TC1301AVDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVDE	-	TC1301AVDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVDF	-	TC1301AVDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVEA	-	TC1301AVEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVEB	-	TC1301AVEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVEC	-	TC1301AVECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVED	-	TC1301AVEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AVEE	-	TC1301AVEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVEF	-	TC1301AVEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVFA	-	TC1301AVFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVFB	-	TC1301AVFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVFC	-	TC1301AVFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVFD	-	TC1301AVFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVFE	-	TC1301AVFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVFF	-	TC1301AVFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVGA	-	TC1301AVGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVGB	-	TC1301AVGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVGC	-	TC1301AVGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVGD	-	TC1301AVGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVGE	-	TC1301AVGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVGF	-	TC1301AVGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVHA	-	TC1301AVHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVHB	-	TC1301AVHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVHC	-	TC1301AVHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVHD	-	TC1301AVHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVHE	-	TC1301AVHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVHF	-	TC1301AVHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVIA	-	TC1301AVIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVIB	-	TC1301AVIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVIC	-	TC1301AVICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVID	-	TC1301AVIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVIE	-	TC1301AVIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVIF	-	TC1301AVIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVJA	-	TC1301AVJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVJB	-	TC1301AVJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVJC	-	TC1301AVJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVJD	-	TC1301AVJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVJE	-	TC1301AVJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVJF	-	TC1301AVJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVKA	-	TC1301AVKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVKB	-	TC1301AVKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVKC	-	TC1301AVKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVKD	-	TC1301AVKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVKE	-	TC1301AVKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVKF	-	TC1301AVKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVLA	-	TC1301AVLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVLB	-	TC1301AVLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVLC	-	TC1301AVLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVLD	-	TC1301AVLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVLE	-	TC1301AVLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVLF	-	TC1301AVLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVMA	-	TC1301AVMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVMB	-	TC1301AVMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVMC	-	TC1301AVMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVMD	-	TC1301AVMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVME	-	TC1301AVMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVMF	-	TC1301AVMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVNA	-	TC1301AVNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVNB	-	TC1301AVNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVNC	-	TC1301AVNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVND	-	TC1301AVNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVNE	-	TC1301AVNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVNF	-	TC1301AVNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVOA	-	TC1301AVOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVOB	-	TC1301AVOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVOC	-	TC1301AVOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVOD	-	TC1301AVODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVOE	-	TC1301AVOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVOF	-	TC1301AVOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVPA	-	TC1301AVPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVPB	-	TC1301AVPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVPC	-	TC1301AVPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVPD	-	TC1301AVPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVPE	-	TC1301AVPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVPF	-	TC1301AVPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVQA	-	TC1301AVQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVQB	-	TC1301AVQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AVQC	-	TC1301AVQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVQD	-	TC1301AVQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVQE	-	TC1301AVQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVQF	-	TC1301AVQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVRA	-	TC1301AVRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVRB	-	TC1301AVRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVRC	-	TC1301AVRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVRD	-	TC1301AVRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVRE	-	TC1301AVREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVRF	-	TC1301AVRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVSA	-	TC1301AVSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVSB	-	TC1301AVSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVSC	-	TC1301AVSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVSD	-	TC1301AVSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVSE	-	TC1301AVSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVSF	-	TC1301AVSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVTA	-	TC1301AVTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVTB	-	TC1301AVTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVTC	-	TC1301AVTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVTD	-	TC1301AVTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVTE	-	TC1301AVTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVTF	-	TC1301AVTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVUA	-	TC1301AVUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVUB	-	TC1301AVUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVUC	-	TC1301AVUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVUD	-	TC1301AVUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVUE	-	TC1301AVUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVUF	-	TC1301AVUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVVA	-	TC1301AVVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVVB	-	TC1301AVVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVVC	-	TC1301AVVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVVD	-	TC1301AVVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVVE	-	TC1301AVVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVVF	-	TC1301AVVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVWA	-	TC1301AVWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVWB	-	TC1301AVWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVWC	-	TC1301AVWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVWD	-	TC1301AVWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVWE	-	TC1301AVWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AVWF	-	TC1301AVWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWAA	-	TC1301AWAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWAB	-	TC1301AWABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWAC	-	TC1301AWACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWAD	-	TC1301AWADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWAE	-	TC1301AWAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWAF	-	TC1301AWAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWBA	-	TC1301AWBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWBB	-	TC1301AWBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWBC	-	TC1301AWBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWBD	-	TC1301AWBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWBE	-	TC1301AWBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWBF	-	TC1301AWBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWCA	-	TC1301AWCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWCB	-	TC1301AWCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWCC	-	TC1301AWCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWCD	-	TC1301AWCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWCE	-	TC1301AWCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWCF	-	TC1301AWCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWDA	-	TC1301AWDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWDB	-	TC1301AWDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWDC	-	TC1301AWDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWDD	-	TC1301AWDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWDE	-	TC1301AWDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWDF	-	TC1301AWDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWEA	-	TC1301AWEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWEB	-	TC1301AWEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWEC	-	TC1301AWECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWED	-	TC1301AWEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWEE	-	TC1301AWEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWEF	-	TC1301AWEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AWFA	-	TC1301AWFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWFB	-	TC1301AWFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWFC	-	TC1301AWFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWFD	-	TC1301AWFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWFE	-	TC1301AWFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWFF	-	TC1301AWFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWGA	-	TC1301AWGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWGB	-	TC1301AWGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWGC	-	TC1301AWGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWGD	-	TC1301AWGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWGE	-	TC1301AWGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWGF	-	TC1301AWGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWHA	-	TC1301AWHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWHB	-	TC1301AWHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWHC	-	TC1301AWHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWHD	-	TC1301AWHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWHE	-	TC1301AWHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWHF	-	TC1301AWHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWIA	-	TC1301AWIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWIB	-	TC1301AWIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWIC	-	TC1301AWICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWID	-	TC1301AWIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWIE	-	TC1301AWIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWIF	-	TC1301AWIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWJA	-	TC1301AWJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWJB	-	TC1301AWJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWJC	-	TC1301AWJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWJD	-	TC1301AWJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWJE	-	TC1301AWJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWJF	-	TC1301AWJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWKA	-	TC1301AWKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWKB	-	TC1301AWKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWKC	-	TC1301AWKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWKD	-	TC1301AWKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWKE	-	TC1301AWKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWKF	-	TC1301AWKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWLA	-	TC1301AWLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWLB	-	TC1301AWLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWLC	-	TC1301AWLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWLD	-	TC1301AWLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWLE	-	TC1301AWLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWLF	-	TC1301AWLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWMA	-	TC1301AWMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWMB	-	TC1301AWMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWMC	-	TC1301AWMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWMD	-	TC1301AWMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWME	-	TC1301AWMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWMF	-	TC1301AWMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWNA	-	TC1301AWNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWNB	-	TC1301AWNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWNC	-	TC1301AWNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWND	-	TC1301AWNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWNE	-	TC1301AWNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWNF	-	TC1301AWNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWOA	-	TC1301AWOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWOB	-	TC1301AWOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWOC	-	TC1301AWOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWOD	-	TC1301AWODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWOE	-	TC1301AWOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWOF	-	TC1301AWOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWPA	-	TC1301AWPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWPB	-	TC1301AWPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWPC	-	TC1301AWPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWPD	-	TC1301AWPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWPE	-	TC1301AWPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWPF	-	TC1301AWPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWQA	-	TC1301AWQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWQB	-	TC1301AWQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWQC	-	TC1301AWQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWQD	-	TC1301AWQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31AWQE	-	TC1301AWQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWQF	-	TC1301AWQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWRA	-	TC1301AWRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWRB	-	TC1301AWRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWRC	-	TC1301AWRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWRD	-	TC1301AWRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWRE	-	TC1301AWREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWRF	-	TC1301AWRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWSA	-	TC1301AWSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWSB	-	TC1301AWSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWSC	-	TC1301AWSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWSD	-	TC1301AWSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWSE	-	TC1301AWSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWSF	-	TC1301AWSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWTA	-	TC1301AWTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWTB	-	TC1301AWTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWTC	-	TC1301AWTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWTD	-	TC1301AWTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWTE	-	TC1301AWTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWTF	-	TC1301AWTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWUA	-	TC1301AWUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWUB	-	TC1301AWUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWUC	-	TC1301AWUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWUD	-	TC1301AWUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWUE	-	TC1301AWUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWUF	-	TC1301AWUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWVA	-	TC1301AWVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWVB	-	TC1301AWVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWVC	-	TC1301AWVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWVD	-	TC1301AWVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWVE	-	TC1301AWVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWVF	-	TC1301AWVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWWA	-	TC1301AWWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWWB	-	TC1301AWWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWWC	-	TC1301AWWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWWD	-	TC1301AWWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWWE	-	TC1301AWWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31AWWF	-	TC1301AWWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u1	VR27	8k	Mcc
31BAAA	-	TC1301BAAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAAB	-	TC1301BAABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAAC	-	TC1301BAACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAAD	-	TC1301BAADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAAE	-	TC1301BAAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAAF	-	TC1301BAAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BABA	-	TC1301BABAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BABB	-	TC1301BABBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BABC	-	TC1301BABCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BABD	-	TC1301BABDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BABE	-	TC1301BABEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BABF	-	TC1301BABFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BACA	-	TC1301BACAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BACB	-	TC1301BACBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BACC	-	TC1301BACCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BACD	-	TC1301BACDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BACE	-	TC1301BACEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BACF	-	TC1301BACFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BADA	-	TC1301BADAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BADB	-	TC1301BADBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BADC	-	TC1301BADCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BADD	-	TC1301BADDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BADE	-	TC1301BADEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BADF	-	TC1301BADFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAEA	-	TC1301BAEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAEB	-	TC1301BAEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAEC	-	TC1301BAECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAED	-	TC1301BAEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAEE	-	TC1301BAEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAEF	-	TC1301BAEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAFA	-	TC1301BAFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAFB	-	TC1301BAFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BAFC	-	TC1301BAFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAFD	-	TC1301BAFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAFE	-	TC1301BAFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAFF	-	TC1301BAFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAGA	-	TC1301BAGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAGB	-	TC1301BAGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAGC	-	TC1301BAGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAGD	-	TC1301BAGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAGE	-	TC1301BAGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAGF	-	TC1301BAGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAHA	-	TC1301BAHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAHB	-	TC1301BAHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAHC	-	TC1301BAHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAHD	-	TC1301BAHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAHE	-	TC1301BAHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAHF	-	TC1301BAHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAIA	-	TC1301BAIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAIB	-	TC1301BAIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAIC	-	TC1301BAICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAID	-	TC1301BAIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAIE	-	TC1301BAIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAIF	-	TC1301BAIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAJA	-	TC1301BAJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAJB	-	TC1301BAJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAJC	-	TC1301BAJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAJD	-	TC1301BAJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAJE	-	TC1301BAJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAJF	-	TC1301BAJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAKA	-	TC1301BAKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAKB	-	TC1301BAKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAKC	-	TC1301BAKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAKD	-	TC1301BAKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAKE	-	TC1301BAKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAKF	-	TC1301BAKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BALA	-	TC1301BALAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BALB	-	TC1301BALBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BALC	-	TC1301BALCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BALD	-	TC1301BALDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BALE	-	TC1301BALEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BALF	-	TC1301BALFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAMA	-	TC1301BAMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAMB	-	TC1301BAMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAMC	-	TC1301BAMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAMD	-	TC1301BAMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAME	-	TC1301BAMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAMF	-	TC1301BAMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BANA	-	TC1301BANAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BANB	-	TC1301BANBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BANC	-	TC1301BANCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAND	-	TC1301BANDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BANE	-	TC1301BANEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BANF	-	TC1301BANFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAOA	-	TC1301BAOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAOB	-	TC1301BAOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAOC	-	TC1301BAOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAOD	-	TC1301BAODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAOE	-	TC1301BAOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAOF	-	TC1301BAOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAPA	-	TC1301BAPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAPB	-	TC1301BAPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAPC	-	TC1301BAPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAPD	-	TC1301BAPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAPE	-	TC1301BAPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAPF	-	TC1301BAPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAQA	-	TC1301BAQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAQB	-	TC1301BAQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAQC	-	TC1301BAQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAQD	-	TC1301BAQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAQE	-	TC1301BAQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAQF	-	TC1301BAQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BARA	-	TC1301BARAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BARB	-	TC1301BARBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BARC	-	TC1301BARCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BARD	-	TC1301BARDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BARE	-	TC1301BAREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BARF	-	TC1301BARFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BASA	-	TC1301BASAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BASB	-	TC1301BASBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BASC	-	TC1301BASCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BASD	-	TC1301BASDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BASE	-	TC1301BASEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BASF	-	TC1301BASFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BATA	-	TC1301BATAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BATB	-	TC1301BATBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BATC	-	TC1301BATCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BATD	-	TC1301BATDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BATE	-	TC1301BATEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BATF	-	TC1301BATFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAUA	-	TC1301BAUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAUB	-	TC1301BAUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAUC	-	TC1301BAUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAUD	-	TC1301BAUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAUE	-	TC1301BAUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAUF	-	TC1301BAUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAVA	-	TC1301BAVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAVB	-	TC1301BAVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAVC	-	TC1301BAVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAVD	-	TC1301BAVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAVE	-	TC1301BAVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAVF	-	TC1301BAVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAWA	-	TC1301BAWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAWB	-	TC1301BAWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAWC	-	TC1301BAWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAWD	-	TC1301BAWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAWE	-	TC1301BAWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BAWF	-	TC1301BAWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBAA	-	TC1301BBAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBAB	-	TC1301BBABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBAC	-	TC1301BBACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBAD	-	TC1301BBADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBAE	-	TC1301BBAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBAF	-	TC1301BBAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBBA	-	TC1301BBBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBBB	-	TC1301BBBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBBC	-	TC1301BBBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBBD	-	TC1301BBBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBBE	-	TC1301BBBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBBF	-	TC1301BBBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBCA	-	TC1301BBCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBCB	-	TC1301BBCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBCC	-	TC1301BBCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBCD	-	TC1301BBCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBCE	-	TC1301BBCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBCF	-	TC1301BBCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBDA	-	TC1301BBDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBDB	-	TC1301BBDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBDC	-	TC1301BBDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBDD	-	TC1301BBDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBDE	-	TC1301BBDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBDF	-	TC1301BBDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBEA	-	TC1301BBEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBEB	-	TC1301BBEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBEC	-	TC1301BBECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBED	-	TC1301BBEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBEE	-	TC1301BBEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBEF	-	TC1301BBEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBFA	-	TC1301BBFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBFB	-	TC1301BBFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBFC	-	TC1301BBFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBFD	-	TC1301BBFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BBFE	-	TC1301BBFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBFF	-	TC1301BBFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBGA	-	TC1301BBGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBGB	-	TC1301BBGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBGC	-	TC1301BBGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBGD	-	TC1301BBGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBGE	-	TC1301BBGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBGF	-	TC1301BBGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBHA	-	TC1301BBHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBHB	-	TC1301BBHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBHC	-	TC1301BBHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBHD	-	TC1301BBHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBHE	-	TC1301BBHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBHF	-	TC1301BBHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBIA	-	TC1301BBIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBIB	-	TC1301BBIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBIC	-	TC1301BBICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBID	-	TC1301BBIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBIE	-	TC1301BBIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBIF	-	TC1301BBIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBJA	-	TC1301BBJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBJB	-	TC1301BBJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBJC	-	TC1301BBJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBJD	-	TC1301BBJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBJE	-	TC1301BBJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBJF	-	TC1301BBJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBKA	-	TC1301BBKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBKB	-	TC1301BBKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBKC	-	TC1301BBKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBKD	-	TC1301BBKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBKE	-	TC1301BBKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBKF	-	TC1301BBKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBLA	-	TC1301BBLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBLB	-	TC1301BBLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBLC	-	TC1301BBLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBLD	-	TC1301BBLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBLE	-	TC1301BBLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBLF	-	TC1301BBLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBMA	-	TC1301BBMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBMB	-	TC1301BBMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBMC	-	TC1301BBMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBMD	-	TC1301BBMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBME	-	TC1301BBMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBMF	-	TC1301BBMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBNA	-	TC1301BBNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBNB	-	TC1301BBNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBNC	-	TC1301BBNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBND	-	TC1301BBNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBNE	-	TC1301BBNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBNF	-	TC1301BBNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBOA	-	TC1301BBOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBOB	-	TC1301BBOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBOC	-	TC1301BBOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBOD	-	TC1301BBODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBOE	-	TC1301BBOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBOF	-	TC1301BBOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBPA	-	TC1301BBPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBPB	-	TC1301BBPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBPC	-	TC1301BBPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBPD	-	TC1301BBPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBPE	-	TC1301BBPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBPF	-	TC1301BBPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBQA	-	TC1301BBQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBQB	-	TC1301BBQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBQC	-	TC1301BBQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBQD	-	TC1301BBQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBQE	-	TC1301BBQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBQF	-	TC1301BBQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBRA	-	TC1301BBRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBRB	-	TC1301BBRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BBRC	-	TC1301BBRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBRD	-	TC1301BBRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBRE	-	TC1301BBREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBRF	-	TC1301BBRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBSA	-	TC1301BBSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBSB	-	TC1301BBSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBSC	-	TC1301BBSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBSD	-	TC1301BBSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBSE	-	TC1301BBSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBSF	-	TC1301BBSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBTA	-	TC1301BBTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBTB	-	TC1301BBTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBTC	-	TC1301BBTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBTD	-	TC1301BBTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBTE	-	TC1301BBTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBTF	-	TC1301BBTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBUA	-	TC1301BBUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBUB	-	TC1301BBUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBUC	-	TC1301BBUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBUD	-	TC1301BBUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBUE	-	TC1301BBUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBUF	-	TC1301BBUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBVA	-	TC1301BBVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBVB	-	TC1301BBVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBVC	-	TC1301BBVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBVD	-	TC1301BBVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBVE	-	TC1301BBVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBVF	-	TC1301BBVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBWA	-	TC1301BBWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBWB	-	TC1301BBWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBWC	-	TC1301BBWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBWD	-	TC1301BBWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBWE	-	TC1301BBWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BBWF	-	TC1301BBWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCAA	-	TC1301BCAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCAB	-	TC1301BCABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCAC	-	TC1301BCACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCAD	-	TC1301BCADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCAE	-	TC1301BCAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCAF	-	TC1301BCAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCBA	-	TC1301BCBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCBB	-	TC1301BCBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCBC	-	TC1301BCBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCBD	-	TC1301BCBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCBE	-	TC1301BCBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCBF	-	TC1301BCBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCCA	-	TC1301BCCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCCB	-	TC1301BCCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCCC	-	TC1301BCCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCCD	-	TC1301BCCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCCE	-	TC1301BCCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCCF	-	TC1301BCCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCDA	-	TC1301BCDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCDB	-	TC1301BCDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCDC	-	TC1301BCDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCDD	-	TC1301BCDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCDE	-	TC1301BCDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCDF	-	TC1301BCDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCEA	-	TC1301BCEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCEB	-	TC1301BCEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCEC	-	TC1301BCECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCED	-	TC1301BCEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCEE	-	TC1301BCEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCEF	-	TC1301BCEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCFA	-	TC1301BCFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCFB	-	TC1301BCFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCFC	-	TC1301BCFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCFD	-	TC1301BCFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCFE	-	TC1301BCFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCFF	-	TC1301BCFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BCGA	-	TC1301BCGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCGB	-	TC1301BCGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCGC	-	TC1301BCGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCGD	-	TC1301BCGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCGE	-	TC1301BCGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCGF	-	TC1301BCGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCHA	-	TC1301BCHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCHB	-	TC1301BCHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCHC	-	TC1301BCHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCHD	-	TC1301BCHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCHE	-	TC1301BCHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCHF	-	TC1301BCHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCIA	-	TC1301BCIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCIB	-	TC1301BCIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCIC	-	TC1301BCICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCID	-	TC1301BCIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCIE	-	TC1301BCIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCIF	-	TC1301BCIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCJA	-	TC1301BCJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCJB	-	TC1301BCJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCJC	-	TC1301BCJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCJD	-	TC1301BCJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCJE	-	TC1301BCJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCJF	-	TC1301BCJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCKA	-	TC1301BCKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCKB	-	TC1301BCKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCKC	-	TC1301BCKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCKD	-	TC1301BCKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCKE	-	TC1301BCKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCKF	-	TC1301BCKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCLA	-	TC1301BCLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCLB	-	TC1301BCLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCLC	-	TC1301BCLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCLD	-	TC1301BCLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCLE	-	TC1301BCLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCLF	-	TC1301BCLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCMA	-	TC1301BCMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCMB	-	TC1301BCMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCMC	-	TC1301BCMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCMD	-	TC1301BCMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCME	-	TC1301BCMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCMF	-	TC1301BCMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCNA	-	TC1301BCNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCNB	-	TC1301BCNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCNC	-	TC1301BCNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCND	-	TC1301BCNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCNE	-	TC1301BCNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCNF	-	TC1301BCNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCOA	-	TC1301BCOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCOB	-	TC1301BCOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCOC	-	TC1301BCOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCOD	-	TC1301BCODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCOE	-	TC1301BCOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCOF	-	TC1301BCOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCPA	-	TC1301BCPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCPB	-	TC1301BCPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCPC	-	TC1301BCPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCPD	-	TC1301BCPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCPE	-	TC1301BCPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCPF	-	TC1301BCPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCQA	-	TC1301BCQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCQB	-	TC1301BCQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCQC	-	TC1301BCQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCQD	-	TC1301BCQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCQE	-	TC1301BCQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCQF	-	TC1301BCQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCRA	-	TC1301BCRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCRB	-	TC1301BCRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCRC	-	TC1301BCRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCRD	-	TC1301BCRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BCRE	-	TC1301BCREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCRF	-	TC1301BCRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCSA	-	TC1301BCSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCSB	-	TC1301BCSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCSC	-	TC1301BCSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCSD	-	TC1301BCSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCSE	-	TC1301BCSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCSF	-	TC1301BCSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCTA	-	TC1301BCTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCTB	-	TC1301BCTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCTC	-	TC1301BCTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCTD	-	TC1301BCTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCTE	-	TC1301BCTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCTF	-	TC1301BCTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCUA	-	TC1301BCUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCUB	-	TC1301BCUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCUC	-	TC1301BCUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCUD	-	TC1301BCUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCUE	-	TC1301BCUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCUF	-	TC1301BCUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCVA	-	TC1301BCVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCVB	-	TC1301BCVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCVC	-	TC1301BCVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCVD	-	TC1301BCVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCVE	-	TC1301BCVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCVF	-	TC1301BCVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCWA	-	TC1301BCWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCWB	-	TC1301BCWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCWC	-	TC1301BCWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCWD	-	TC1301BCWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCWE	-	TC1301BCWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BCWF	-	TC1301BCWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDAA	-	TC1301BDAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDAB	-	TC1301BDABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDAC	-	TC1301BDACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDAD	-	TC1301BDADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDAE	-	TC1301BDAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDAF	-	TC1301BDAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDBA	-	TC1301BDBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDBB	-	TC1301BDBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDBC	-	TC1301BDBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDBD	-	TC1301BDBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDBE	-	TC1301BDBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDBF	-	TC1301BDBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDCA	-	TC1301BDCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDCB	-	TC1301BDCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDCC	-	TC1301BDCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDCD	-	TC1301BDCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDCE	-	TC1301BDCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDCF	-	TC1301BDCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDDA	-	TC1301BDDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDDB	-	TC1301BDDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDDC	-	TC1301BDDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDDD	-	TC1301BDDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDDE	-	TC1301BDDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDDF	-	TC1301BDDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDEA	-	TC1301BDEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDEB	-	TC1301BDEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDEC	-	TC1301BDECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDED	-	TC1301BDEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDEE	-	TC1301BDEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDEF	-	TC1301BDEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDFA	-	TC1301BDFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDFB	-	TC1301BDFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDFC	-	TC1301BDFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDFD	-	TC1301BDFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDFE	-	TC1301BDFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDFF	-	TC1301BDFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDGA	-	TC1301BDGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDGB	-	TC1301BDGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BDGC	-	TC1301BDGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDGD	-	TC1301BDGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDGE	-	TC1301BDGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDGF	-	TC1301BDGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDHA	-	TC1301BDHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDHB	-	TC1301BDHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDHC	-	TC1301BDHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDHD	-	TC1301BDHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDHE	-	TC1301BDHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDHF	-	TC1301BDHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDIA	-	TC1301BDIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDIB	-	TC1301BDIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDIC	-	TC1301BDICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDID	-	TC1301BDIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDIE	-	TC1301BDIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDIF	-	TC1301BDIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDJA	-	TC1301BDJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDJB	-	TC1301BDJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDJC	-	TC1301BDJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDJD	-	TC1301BDJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDJE	-	TC1301BDJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDJF	-	TC1301BDJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDKA	-	TC1301BDKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDKB	-	TC1301BDKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDKC	-	TC1301BDKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDKD	-	TC1301BDKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDKE	-	TC1301BDKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDKF	-	TC1301BDKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDLA	-	TC1301BDLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDLB	-	TC1301BDLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDLC	-	TC1301BDLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDLD	-	TC1301BDLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDLE	-	TC1301BDLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDLF	-	TC1301BDLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDMA	-	TC1301BDMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDMB	-	TC1301BDMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDMC	-	TC1301BDMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDMD	-	TC1301BDMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDME	-	TC1301BDMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDMF	-	TC1301BDMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDNA	-	TC1301BDNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDNB	-	TC1301BDNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDNC	-	TC1301BDNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDND	-	TC1301BDNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDNE	-	TC1301BDNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDNF	-	TC1301BDNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDOA	-	TC1301BDOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDOB	-	TC1301BDOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDOC	-	TC1301BDOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDOD	-	TC1301BDODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDOE	-	TC1301BDOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDOF	-	TC1301BDOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDPA	-	TC1301BDPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDPB	-	TC1301BDPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDPC	-	TC1301BDPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDPD	-	TC1301BDPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDPE	-	TC1301BDPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDPF	-	TC1301BDPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDQA	-	TC1301BDQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDQB	-	TC1301BDQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDQC	-	TC1301BDQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDQD	-	TC1301BDQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDQE	-	TC1301BDQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDQF	-	TC1301BDQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDRA	-	TC1301BDRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDRB	-	TC1301BDRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDRC	-	TC1301BDRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDRD	-	TC1301BDRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDRE	-	TC1301BDREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDRF	-	TC1301BDRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BDSA	-	TC1301BDSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDSB	-	TC1301BDSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDSC	-	TC1301BDSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDSD	-	TC1301BDSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDSE	-	TC1301BDSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDSF	-	TC1301BDSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDTA	-	TC1301BDTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDTB	-	TC1301BDTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDTC	-	TC1301BDTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDTD	-	TC1301BDTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDTE	-	TC1301BDTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDTF	-	TC1301BDTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDUA	-	TC1301BDUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDUB	-	TC1301BDUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDUC	-	TC1301BDUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDUD	-	TC1301BDUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDUE	-	TC1301BDUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDUF	-	TC1301BDUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDVA	-	TC1301BDVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDVB	-	TC1301BDVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDVC	-	TC1301BDVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDVD	-	TC1301BDVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDVE	-	TC1301BDVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDVF	-	TC1301BDVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDWA	-	TC1301BDWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDWB	-	TC1301BDWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDWC	-	TC1301BDWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDWD	-	TC1301BDWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDWE	-	TC1301BDWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BDWF	-	TC1301BDWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEAA	-	TC1301BEAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEAB	-	TC1301BEABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEAC	-	TC1301BEACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEAD	-	TC1301BEADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEAE	-	TC1301BEAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEAF	-	TC1301BEAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEBA	-	TC1301BEBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEBB	-	TC1301BEBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEBC	-	TC1301BEBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEBD	-	TC1301BEBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEBE	-	TC1301BEBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEBF	-	TC1301BEBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BECA	-	TC1301BECAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BECB	-	TC1301BECBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BECC	-	TC1301BECCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BECD	-	TC1301BECDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BECE	-	TC1301BECEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BECF	-	TC1301BECFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEDA	-	TC1301BEDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEDB	-	TC1301BEDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEDC	-	TC1301BEDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEDD	-	TC1301BEDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEDE	-	TC1301BEDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEDF	-	TC1301BEDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEEA	-	TC1301BEEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEEB	-	TC1301BEEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEEC	-	TC1301BEECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEED	-	TC1301BEEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEEE	-	TC1301BEEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEEF	-	TC1301BEEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEFA	-	TC1301BEFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEFB	-	TC1301BEFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEFC	-	TC1301BEFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEFD	-	TC1301BEFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEFE	-	TC1301BEFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEFF	-	TC1301BEFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEGA	-	TC1301BEGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEGB	-	TC1301BEGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEGC	-	TC1301BEGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEGD	-	TC1301BEGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BEGE	-	TC1301BEGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEGF	-	TC1301BEGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEHA	-	TC1301BEHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEHB	-	TC1301BEHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEHC	-	TC1301BEHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEHD	-	TC1301BEHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEHE	-	TC1301BEHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEHF	-	TC1301BEHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEIA	-	TC1301BEIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEIB	-	TC1301BEIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEIC	-	TC1301BEICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEID	-	TC1301BEIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEIE	-	TC1301BEIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEIF	-	TC1301BEIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEJA	-	TC1301BEJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEJB	-	TC1301BEJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEJC	-	TC1301BEJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEJD	-	TC1301BEJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEJE	-	TC1301BEJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEJF	-	TC1301BEJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEKA	-	TC1301BEKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEKB	-	TC1301BEKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEKC	-	TC1301BEKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEKD	-	TC1301BEKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEKE	-	TC1301BEKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEKF	-	TC1301BEKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BELA	-	TC1301BELAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BELB	-	TC1301BELBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BELC	-	TC1301BELCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BELD	-	TC1301BELDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BELE	-	TC1301BELEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BELF	-	TC1301BELFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEMA	-	TC1301BEMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEMB	-	TC1301BEMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEMC	-	TC1301BEMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEMD	-	TC1301BEMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEME	-	TC1301BEMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEMF	-	TC1301BEMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BENA	-	TC1301BENAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BENB	-	TC1301BENBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BENC	-	TC1301BENCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEND	-	TC1301BENDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BENE	-	TC1301BENEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BENF	-	TC1301BENFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEOA	-	TC1301BEOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEOB	-	TC1301BEOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEOC	-	TC1301BEOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEOD	-	TC1301BEODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEOE	-	TC1301BEOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEOF	-	TC1301BEOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEPA	-	TC1301BEPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEPB	-	TC1301BEPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEPC	-	TC1301BEPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEPD	-	TC1301BEPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEPE	-	TC1301BEPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEPF	-	TC1301BEPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEQA	-	TC1301BEQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEQB	-	TC1301BEQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEQC	-	TC1301BEQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEQD	-	TC1301BEQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEQE	-	TC1301BEQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEQF	-	TC1301BEQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BERA	-	TC1301BERAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BERB	-	TC1301BERBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BERC	-	TC1301BERCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BERD	-	TC1301BERDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BERE	-	TC1301BEREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BERF	-	TC1301BERFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BESA	-	TC1301BESAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BESB	-	TC1301BESBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BESC	-	TC1301BESCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BESD	-	TC1301BESDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BESE	-	TC1301BESEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BESF	-	TC1301BESFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BETA	-	TC1301BETAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BETB	-	TC1301BETBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BETC	-	TC1301BETCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BETD	-	TC1301BETDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BETE	-	TC1301BETEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BETF	-	TC1301BETFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEUA	-	TC1301BEUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEUB	-	TC1301BEUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEUC	-	TC1301BEUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEUD	-	TC1301BEUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEUE	-	TC1301BEUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEUF	-	TC1301BEUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEVA	-	TC1301BEVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEVB	-	TC1301BEVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEVC	-	TC1301BEVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEVD	-	TC1301BEVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEVE	-	TC1301BEVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEVF	-	TC1301BEVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEWA	-	TC1301BEWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEWB	-	TC1301BEWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEWC	-	TC1301BEWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEWD	-	TC1301BEWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEWE	-	TC1301BEWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BEWF	-	TC1301BEWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFAA	-	TC1301BFAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFAB	-	TC1301BFABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFAC	-	TC1301BFACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFAD	-	TC1301BFADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFAE	-	TC1301BFAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFAF	-	TC1301BFAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFBA	-	TC1301BFBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFBB	-	TC1301BFBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFBC	-	TC1301BFBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFBD	-	TC1301BFBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFBE	-	TC1301BFBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFBF	-	TC1301BFBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFCA	-	TC1301BFCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFCB	-	TC1301BFCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFCC	-	TC1301BFCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFCD	-	TC1301BFCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFCE	-	TC1301BFCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFCF	-	TC1301BFCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFDA	-	TC1301BFDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFDB	-	TC1301BFDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFDC	-	TC1301BFDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFDD	-	TC1301BFDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFDE	-	TC1301BFDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFDF	-	TC1301BFDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFEA	-	TC1301BFEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFEB	-	TC1301BFEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFEC	-	TC1301BFECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFED	-	TC1301BFEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFEE	-	TC1301BFEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFEF	-	TC1301BFEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFFA	-	TC1301BFFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFFB	-	TC1301BFFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFFC	-	TC1301BFFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFFD	-	TC1301BFFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFFE	-	TC1301BFFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFFF	-	TC1301BFFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFGA	-	TC1301BFGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFGB	-	TC1301BFGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFGC	-	TC1301BFGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFGD	-	TC1301BFGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFGE	-	TC1301BFGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFGF	-	TC1301BFGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BFHA	-	TC1301BFHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFHB	-	TC1301BFHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFHC	-	TC1301BFHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFHD	-	TC1301BFHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFHE	-	TC1301BFHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFHF	-	TC1301BFHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFIA	-	TC1301BFIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFIB	-	TC1301BFIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFIC	-	TC1301BFICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFID	-	TC1301BFIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFIE	-	TC1301BFIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFIF	-	TC1301BFIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFJA	-	TC1301BFJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFJB	-	TC1301BFJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFJC	-	TC1301BFJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFJD	-	TC1301BFJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFJE	-	TC1301BFJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFJF	-	TC1301BFJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFKA	-	TC1301BFKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFKB	-	TC1301BFKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFKC	-	TC1301BFKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFKD	-	TC1301BFKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFKE	-	TC1301BFKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFKF	-	TC1301BFKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFLA	-	TC1301BFLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFLB	-	TC1301BFLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFLC	-	TC1301BFLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFLD	-	TC1301BFLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFLE	-	TC1301BFLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFLF	-	TC1301BFLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFMA	-	TC1301BFMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFMB	-	TC1301BFMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFMC	-	TC1301BFMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFMD	-	TC1301BFMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFME	-	TC1301BFMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFMF	-	TC1301BFMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFNA	-	TC1301BFNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFNB	-	TC1301BFNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFNC	-	TC1301BFNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFND	-	TC1301BFNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFNE	-	TC1301BFNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFNF	-	TC1301BFNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFOA	-	TC1301BFOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFOB	-	TC1301BFOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFOC	-	TC1301BFOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFOD	-	TC1301BFODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFOE	-	TC1301BFOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFOF	-	TC1301BFOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFPA	-	TC1301BFPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFPB	-	TC1301BFPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFPC	-	TC1301BFPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFPD	-	TC1301BFPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFPE	-	TC1301BFPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFPF	-	TC1301BFPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFQA	-	TC1301BFQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFQB	-	TC1301BFQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFQC	-	TC1301BFQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFQD	-	TC1301BFQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFQE	-	TC1301BFQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFQF	-	TC1301BFQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFRA	-	TC1301BFRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFRB	-	TC1301BFRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFRC	-	TC1301BFRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFRD	-	TC1301BFRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFRE	-	TC1301BFREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFRF	-	TC1301BFRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFSA	-	TC1301BFSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFSB	-	TC1301BFSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFSC	-	TC1301BFSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFSD	-	TC1301BFSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BFSE	-	TC1301BFSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFSF	-	TC1301BFSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFTA	-	TC1301BFTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFTB	-	TC1301BFTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFTC	-	TC1301BFTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFTD	-	TC1301BFTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFTE	-	TC1301BFTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFTF	-	TC1301BFTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFUA	-	TC1301BFUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFUB	-	TC1301BFUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFUC	-	TC1301BFUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFUD	-	TC1301BFUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFUE	-	TC1301BFUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFUF	-	TC1301BFUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFVA	-	TC1301BFVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFVB	-	TC1301BFVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFVC	-	TC1301BFVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFVD	-	TC1301BFVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFVE	-	TC1301BFVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFVF	-	TC1301BFVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFWA	-	TC1301BFWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFWB	-	TC1301BFWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFWC	-	TC1301BFWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFWD	-	TC1301BFWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFWE	-	TC1301BFWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BFWF	-	TC1301BFWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGAA	-	TC1301BGAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGAB	-	TC1301BGABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGAC	-	TC1301BGACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGAD	-	TC1301BGADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGAE	-	TC1301BGAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGAF	-	TC1301BGAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGBA	-	TC1301BGBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGBB	-	TC1301BGBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGBC	-	TC1301BGBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGBD	-	TC1301BGBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGBE	-	TC1301BGBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGBF	-	TC1301BGBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGCA	-	TC1301BGCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGCB	-	TC1301BGCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGCC	-	TC1301BGCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGCD	-	TC1301BGCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGCE	-	TC1301BGCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGCF	-	TC1301BGCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGDA	-	TC1301BGDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGDB	-	TC1301BGDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGDC	-	TC1301BGDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGDD	-	TC1301BGDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGDE	-	TC1301BGDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGDF	-	TC1301BGDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGEA	-	TC1301BGEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGEB	-	TC1301BGEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGEC	-	TC1301BGECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGED	-	TC1301BGEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGEE	-	TC1301BGEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGEF	-	TC1301BGEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGFA	-	TC1301BGFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGFB	-	TC1301BGFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGFC	-	TC1301BGFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGFD	-	TC1301BGFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGFE	-	TC1301BGFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGFF	-	TC1301BGFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGGA	-	TC1301BGGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGGB	-	TC1301BGGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGGC	-	TC1301BGGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGGD	-	TC1301BGGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGGE	-	TC1301BGGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGGF	-	TC1301BGGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGHA	-	TC1301BGHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGHB	-	TC1301BGHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BGHC	-	TC1301BGHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGHD	-	TC1301BGHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGHE	-	TC1301BGHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGHF	-	TC1301BGHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGIA	-	TC1301BGIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGIB	-	TC1301BGIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGIC	-	TC1301BGICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGID	-	TC1301BGIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGIE	-	TC1301BGIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGIF	-	TC1301BGIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGJA	-	TC1301BGJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGJB	-	TC1301BGJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGJC	-	TC1301BGJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGJD	-	TC1301BGJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGJE	-	TC1301BGJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGJF	-	TC1301BGJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGKA	-	TC1301BGKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGKB	-	TC1301BGKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGKC	-	TC1301BGKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGKD	-	TC1301BGKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGKE	-	TC1301BGKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGKF	-	TC1301BGKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGLA	-	TC1301BGLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGLB	-	TC1301BGLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGLC	-	TC1301BGLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGLD	-	TC1301BGLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGLE	-	TC1301BGLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGLF	-	TC1301BGLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGMA	-	TC1301BGMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGMB	-	TC1301BGMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGMC	-	TC1301BGMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGMD	-	TC1301BGMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGME	-	TC1301BGMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGMF	-	TC1301BGMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGNA	-	TC1301BGNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGNB	-	TC1301BGNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGNC	-	TC1301BGNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGND	-	TC1301BGNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGNE	-	TC1301BGNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGNF	-	TC1301BGNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGOA	-	TC1301BGOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGOB	-	TC1301BGOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGOC	-	TC1301BGOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGOD	-	TC1301BGODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGOE	-	TC1301BGOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGOF	-	TC1301BGOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGPA	-	TC1301BGPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGPB	-	TC1301BGPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGPC	-	TC1301BGPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGPD	-	TC1301BGPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGPE	-	TC1301BGPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGPF	-	TC1301BGPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGQA	-	TC1301BGQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGQB	-	TC1301BGQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGQC	-	TC1301BGQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGQD	-	TC1301BGQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGQE	-	TC1301BGQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGQF	-	TC1301BGQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGRA	-	TC1301BGRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGRB	-	TC1301BGRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGRC	-	TC1301BGRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGRD	-	TC1301BGRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGRE	-	TC1301BGREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGRF	-	TC1301BGRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGSA	-	TC1301BGSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGSB	-	TC1301BGSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGSC	-	TC1301BGSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGSD	-	TC1301BGSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGSE	-	TC1301BGSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGSF	-	TC1301BGSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BGTA	-	TC1301BGTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGTB	-	TC1301BGTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGTC	-	TC1301BGTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGTD	-	TC1301BGTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGTE	-	TC1301BGTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGTF	-	TC1301BGTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGUA	-	TC1301BGUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGUB	-	TC1301BGUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGUC	-	TC1301BGUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGUD	-	TC1301BGUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGUE	-	TC1301BGUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGUF	-	TC1301BGUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGVA	-	TC1301BGVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGVB	-	TC1301BGVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGVC	-	TC1301BGVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGVD	-	TC1301BGVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGVE	-	TC1301BGVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGVF	-	TC1301BGVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGWA	-	TC1301BGWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGWB	-	TC1301BGWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGWC	-	TC1301BGWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGWD	-	TC1301BGWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGWE	-	TC1301BGWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BGWF	-	TC1301BGWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHAA	-	TC1301BHAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHAB	-	TC1301BHABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHAC	-	TC1301BHACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHAD	-	TC1301BHADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHAE	-	TC1301BHAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHAF	-	TC1301BHAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHBA	-	TC1301BHBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHBB	-	TC1301BHBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHBC	-	TC1301BHBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHBD	-	TC1301BHBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHBE	-	TC1301BHBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHBF	-	TC1301BHBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHCA	-	TC1301BHCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHCB	-	TC1301BHCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHCC	-	TC1301BHCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHCD	-	TC1301BHCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHCE	-	TC1301BHCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHCF	-	TC1301BHCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHDA	-	TC1301BHDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHDB	-	TC1301BHDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHDC	-	TC1301BHDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHDD	-	TC1301BHDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHDE	-	TC1301BHDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHDF	-	TC1301BHDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHEA	-	TC1301BHEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHEB	-	TC1301BHEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHEC	-	TC1301BHECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHED	-	TC1301BHEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHEE	-	TC1301BHEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHEF	-	TC1301BHEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHFA	-	TC1301BHFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHFB	-	TC1301BHFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHFC	-	TC1301BHFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHFD	-	TC1301BHFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHFE	-	TC1301BHFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHFF	-	TC1301BHFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHGA	-	TC1301BHGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHGB	-	TC1301BHGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHGC	-	TC1301BHGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHGD	-	TC1301BHGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHGE	-	TC1301BHGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHGF	-	TC1301BHGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHHA	-	TC1301BHHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHHB	-	TC1301BHHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHHC	-	TC1301BHHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHHD	-	TC1301BHHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BHHE	-	TC1301BHHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHHF	-	TC1301BHHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHIA	-	TC1301BHIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHIB	-	TC1301BHIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHIC	-	TC1301BHICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHID	-	TC1301BHIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHIE	-	TC1301BHIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHIF	-	TC1301BHIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHJA	-	TC1301BHJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHJB	-	TC1301BHJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHJC	-	TC1301BHJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHJD	-	TC1301BHJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHJE	-	TC1301BHJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHJF	-	TC1301BHJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHKA	-	TC1301BHKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHKB	-	TC1301BHKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHKC	-	TC1301BHKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHKD	-	TC1301BHKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHKE	-	TC1301BHKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHKF	-	TC1301BHKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHLA	-	TC1301BHLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHLB	-	TC1301BHLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHLC	-	TC1301BHLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHLD	-	TC1301BHLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHLE	-	TC1301BHLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHLF	-	TC1301BHLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHMA	-	TC1301BHMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHMB	-	TC1301BHMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHMC	-	TC1301BHMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHMD	-	TC1301BHMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHME	-	TC1301BHMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHMF	-	TC1301BHMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHNA	-	TC1301BHNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHNB	-	TC1301BHNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHNC	-	TC1301BHNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHND	-	TC1301BHNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHNE	-	TC1301BHNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHNF	-	TC1301BHNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHOA	-	TC1301BHOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHOB	-	TC1301BHOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHOC	-	TC1301BHOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHOD	-	TC1301BHODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHOE	-	TC1301BHOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHOF	-	TC1301BHOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHPA	-	TC1301BHPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHPB	-	TC1301BHPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHPC	-	TC1301BHPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHPD	-	TC1301BHPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHPE	-	TC1301BHPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHPF	-	TC1301BHPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHQA	-	TC1301BHQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHQB	-	TC1301BHQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHQC	-	TC1301BHQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHQD	-	TC1301BHQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHQE	-	TC1301BHQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHQF	-	TC1301BHQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHRA	-	TC1301BHRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHRB	-	TC1301BHRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHRC	-	TC1301BHRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHRD	-	TC1301BHRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHRE	-	TC1301BHREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHRF	-	TC1301BHRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHSA	-	TC1301BHSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHSB	-	TC1301BHSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHSC	-	TC1301BHSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHSD	-	TC1301BHSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHSE	-	TC1301BHSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHSF	-	TC1301BHSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHTA	-	TC1301BHTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHTB	-	TC1301BHTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BHTC	-	TC1301BHTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHTD	-	TC1301BHTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHTE	-	TC1301BHTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHTF	-	TC1301BHTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHUA	-	TC1301BHUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHUB	-	TC1301BHUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHUC	-	TC1301BHUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHUD	-	TC1301BHUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHUE	-	TC1301BHUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHUF	-	TC1301BHUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHVA	-	TC1301BHVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHVB	-	TC1301BHVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHVC	-	TC1301BHVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHVD	-	TC1301BHVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHVE	-	TC1301BHVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHVF	-	TC1301BHVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHWA	-	TC1301BHWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHWB	-	TC1301BHWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHWC	-	TC1301BHWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHWD	-	TC1301BHWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHWE	-	TC1301BHWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BHWF	-	TC1301BHWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIAA	-	TC1301BIAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIAB	-	TC1301BIABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIAC	-	TC1301BIACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIAD	-	TC1301BIADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIAE	-	TC1301BIAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIAF	-	TC1301BIAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIBA	-	TC1301BIBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIBB	-	TC1301BIBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIBC	-	TC1301BIBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIBD	-	TC1301BIBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIBE	-	TC1301BIBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIBF	-	TC1301BIBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BICA	-	TC1301BICAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BICB	-	TC1301BICBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BICC	-	TC1301BICCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BICD	-	TC1301BICDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BICE	-	TC1301BICEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BICF	-	TC1301BICFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIDA	-	TC1301BIDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIDB	-	TC1301BIDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIDC	-	TC1301BIDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIDD	-	TC1301BIDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIDE	-	TC1301BIDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIDF	-	TC1301BIDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIEA	-	TC1301BIEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIEB	-	TC1301BIEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIEC	-	TC1301BIECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIED	-	TC1301BIEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIEE	-	TC1301BIEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIEF	-	TC1301BIEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIFA	-	TC1301BIFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIFB	-	TC1301BIFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIFC	-	TC1301BIFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIFD	-	TC1301BIFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIFE	-	TC1301BIFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIFF	-	TC1301BIFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIGA	-	TC1301BIGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIGB	-	TC1301BIGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIGC	-	TC1301BIGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIGD	-	TC1301BIGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIGE	-	TC1301BIGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIGF	-	TC1301BIGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIHA	-	TC1301BIHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIHB	-	TC1301BIHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIHC	-	TC1301BIHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIHD	-	TC1301BIHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIHE	-	TC1301BIHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIHF	-	TC1301BIHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BIIA	-	TC1301BIIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIIB	-	TC1301BIIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIIC	-	TC1301BIICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIID	-	TC1301BIIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIIE	-	TC1301BIIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIIF	-	TC1301BIIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIJA	-	TC1301BIJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIJB	-	TC1301BIJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIJC	-	TC1301BIJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIJD	-	TC1301BIJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIJE	-	TC1301BIJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIJF	-	TC1301BIJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIKA	-	TC1301BIKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIKB	-	TC1301BIKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIKC	-	TC1301BIKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIKD	-	TC1301BIKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIKE	-	TC1301BIKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIKF	-	TC1301BIKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BILA	-	TC1301BILAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BILB	-	TC1301BILBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BILC	-	TC1301BILCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BILD	-	TC1301BILDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BILE	-	TC1301BILEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BILF	-	TC1301BILFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIMA	-	TC1301BIMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIMB	-	TC1301BIMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIMC	-	TC1301BIMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIMD	-	TC1301BIMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIME	-	TC1301BIMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIMF	-	TC1301BIMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BINA	-	TC1301BINAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BINB	-	TC1301BINBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BINC	-	TC1301BINCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIND	-	TC1301BINDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BINE	-	TC1301BINEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BINF	-	TC1301BINFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIOA	-	TC1301BIOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIOB	-	TC1301BIOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIOC	-	TC1301BIOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIOD	-	TC1301BIODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIOE	-	TC1301BIOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIOF	-	TC1301BIOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIPA	-	TC1301BIPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIPB	-	TC1301BIPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIPC	-	TC1301BIPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIPD	-	TC1301BIPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIPE	-	TC1301BIPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIPF	-	TC1301BIPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIQA	-	TC1301BIQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIQB	-	TC1301BIQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIQC	-	TC1301BIQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIQD	-	TC1301BIQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIQE	-	TC1301BIQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIQF	-	TC1301BIQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIRA	-	TC1301BIRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIRB	-	TC1301BIRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIRC	-	TC1301BIRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIRD	-	TC1301BIRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIRE	-	TC1301BIREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIRF	-	TC1301BIRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BISA	-	TC1301BISAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BISB	-	TC1301BISBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BISC	-	TC1301BISCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BISD	-	TC1301BISDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BISE	-	TC1301BISEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BISF	-	TC1301BISFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BITA	-	TC1301BITAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BITB	-	TC1301BITBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BITC	-	TC1301BITCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BITD	-	TC1301BITDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BITE	-	TC1301BITEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BITF	-	TC1301BITFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIUA	-	TC1301BIUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIUB	-	TC1301BIUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIUC	-	TC1301BIUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIUD	-	TC1301BIUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIUE	-	TC1301BIUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIUF	-	TC1301BIUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIVA	-	TC1301BIVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIVB	-	TC1301BIVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIVC	-	TC1301BIVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIVD	-	TC1301BIVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIVE	-	TC1301BIVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIVF	-	TC1301BIVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIWA	-	TC1301BIWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIWB	-	TC1301BIWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIWC	-	TC1301BIWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIWD	-	TC1301BIWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIWE	-	TC1301BIWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BIWF	-	TC1301BIWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJAA	-	TC1301BJAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJAB	-	TC1301BJABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJAC	-	TC1301BJACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJAD	-	TC1301BJADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJAE	-	TC1301BJAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJAF	-	TC1301BJAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJBA	-	TC1301BJBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJBB	-	TC1301BJBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJBC	-	TC1301BJBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJBD	-	TC1301BJBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJBE	-	TC1301BJBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJBF	-	TC1301BJBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJCA	-	TC1301BJCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJCB	-	TC1301BJCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJCC	-	TC1301BJCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJCD	-	TC1301BJCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJCE	-	TC1301BJCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJCF	-	TC1301BJCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJDA	-	TC1301BJDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJDB	-	TC1301BJDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJDC	-	TC1301BJDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJDD	-	TC1301BJDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJDE	-	TC1301BJDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJDF	-	TC1301BJDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJEA	-	TC1301BJEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJEB	-	TC1301BJEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJEC	-	TC1301BJECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJED	-	TC1301BJEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJEE	-	TC1301BJEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJEF	-	TC1301BJEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJFA	-	TC1301BJFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJFB	-	TC1301BJFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJFC	-	TC1301BJFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJFD	-	TC1301BJFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJFE	-	TC1301BJFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJFF	-	TC1301BJFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJGA	-	TC1301BJGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJGB	-	TC1301BJGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJGC	-	TC1301BJGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJGD	-	TC1301BJGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJGE	-	TC1301BJGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJGF	-	TC1301BJGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJHA	-	TC1301BJHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJHB	-	TC1301BJHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJHC	-	TC1301BJHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJHD	-	TC1301BJHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJHE	-	TC1301BJHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJHF	-	TC1301BJHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJIA	-	TC1301BJIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJIB	-	TC1301BJIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BJIC	-	TC1301BJICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJID	-	TC1301BJIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJIE	-	TC1301BJIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJIF	-	TC1301BJIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJJA	-	TC1301BJJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJJB	-	TC1301BJJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJJC	-	TC1301BJJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJJD	-	TC1301BJJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJJE	-	TC1301BJJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJJF	-	TC1301BJJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJKA	-	TC1301BJKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJKB	-	TC1301BJKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJKC	-	TC1301BJKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJKD	-	TC1301BJKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJKE	-	TC1301BJKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJKF	-	TC1301BJKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJLA	-	TC1301BJLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJLB	-	TC1301BJLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJLC	-	TC1301BJLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJLD	-	TC1301BJLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJLE	-	TC1301BJLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJLF	-	TC1301BJLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJMA	-	TC1301BJMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJMB	-	TC1301BJMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJMC	-	TC1301BJMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJMD	-	TC1301BJMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJME	-	TC1301BJMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJMF	-	TC1301BJMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJNA	-	TC1301BJNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJNB	-	TC1301BJNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJNC	-	TC1301BJNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJND	-	TC1301BJNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJNE	-	TC1301BJNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJNF	-	TC1301BJNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJOA	-	TC1301BJOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJOB	-	TC1301BJOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJOC	-	TC1301BJOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJOD	-	TC1301BJODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJOE	-	TC1301BJOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJOF	-	TC1301BJOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJPA	-	TC1301BJPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJPB	-	TC1301BJPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJPC	-	TC1301BJPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJPD	-	TC1301BJPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJPE	-	TC1301BJPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJPF	-	TC1301BJPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJQA	-	TC1301BJQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJQB	-	TC1301BJQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJQC	-	TC1301BJQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJQD	-	TC1301BJQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJQE	-	TC1301BJQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJQF	-	TC1301BJQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJRA	-	TC1301BJRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJRB	-	TC1301BJRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJRC	-	TC1301BJRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJRD	-	TC1301BJRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJRE	-	TC1301BJREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJRF	-	TC1301BJRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJSA	-	TC1301BJSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJSB	-	TC1301BJSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJSC	-	TC1301BJSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJSD	-	TC1301BJSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJSE	-	TC1301BJSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJSF	-	TC1301BJSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJTA	-	TC1301BJTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJTB	-	TC1301BJTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJTC	-	TC1301BJTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJTD	-	TC1301BJTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJTE	-	TC1301BJTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJTF	-	TC1301BJTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BJUA	-	TC1301BJUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJUB	-	TC1301BJUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJUC	-	TC1301BJUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJUD	-	TC1301BJUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJUE	-	TC1301BJUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJUF	-	TC1301BJUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJVA	-	TC1301BJVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJVB	-	TC1301BJVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJVC	-	TC1301BJVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJVD	-	TC1301BJVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJVE	-	TC1301BJVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJVF	-	TC1301BJVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJWA	-	TC1301BJWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJWB	-	TC1301BJWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJWC	-	TC1301BJWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJWD	-	TC1301BJWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJWE	-	TC1301BJWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BJWF	-	TC1301BJWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKAA	-	TC1301BKAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKAB	-	TC1301BKABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKAC	-	TC1301BKACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKAD	-	TC1301BKADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKAE	-	TC1301BKAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKAF	-	TC1301BKAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKBA	-	TC1301BKBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKBB	-	TC1301BKBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKBC	-	TC1301BKBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKBD	-	TC1301BKBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKBE	-	TC1301BKBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKBF	-	TC1301BKBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKCA	-	TC1301BKCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKCB	-	TC1301BKCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKCC	-	TC1301BKCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKCD	-	TC1301BKCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKCE	-	TC1301BKCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKCF	-	TC1301BKCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKDA	-	TC1301BKDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKDB	-	TC1301BKDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKDC	-	TC1301BKDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKDD	-	TC1301BKDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKDE	-	TC1301BKDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKDF	-	TC1301BKDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKEA	-	TC1301BKEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKEB	-	TC1301BKEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKEC	-	TC1301BKECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKED	-	TC1301BKEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKEE	-	TC1301BKEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKEF	-	TC1301BKEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKFA	-	TC1301BKFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKFB	-	TC1301BKFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKFC	-	TC1301BKFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKFD	-	TC1301BKFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKFE	-	TC1301BKFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKFF	-	TC1301BKFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKGA	-	TC1301BKGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKGB	-	TC1301BKGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKGC	-	TC1301BKGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKGD	-	TC1301BKGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKGE	-	TC1301BKGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKGF	-	TC1301BKGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKHA	-	TC1301BKHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKHB	-	TC1301BKHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKHC	-	TC1301BKHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKHD	-	TC1301BKHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKHE	-	TC1301BKHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKHF	-	TC1301BKHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKIA	-	TC1301BKIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKIB	-	TC1301BKIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKIC	-	TC1301BKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKID	-	TC1301BKIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BKIE	-	TC1301BKIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKIF	-	TC1301BKIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKJA	-	TC1301BKJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKJB	-	TC1301BKJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKJC	-	TC1301BKJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKJD	-	TC1301BKJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKJE	-	TC1301BKJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKJF	-	TC1301BKJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKKA	-	TC1301BKKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKKB	-	TC1301BKKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKKC	-	TC1301BKKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKKD	-	TC1301BKKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKKE	-	TC1301BKKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKKF	-	TC1301BKKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKLA	-	TC1301BKLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKLB	-	TC1301BKLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKLC	-	TC1301BKLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKLD	-	TC1301BKLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKLE	-	TC1301BKLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKLF	-	TC1301BKLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKMA	-	TC1301BKMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKMB	-	TC1301BKMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKMC	-	TC1301BKMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKMD	-	TC1301BKMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKME	-	TC1301BKMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKMF	-	TC1301BKMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKNA	-	TC1301BKNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKNB	-	TC1301BKNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKNC	-	TC1301BKNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKND	-	TC1301BKNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKNE	-	TC1301BKNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKNF	-	TC1301BKNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKOA	-	TC1301BKOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKOB	-	TC1301BKOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKOC	-	TC1301BKOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKOD	-	TC1301BKODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKOE	-	TC1301BKOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKOF	-	TC1301BKOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKPA	-	TC1301BKPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKPB	-	TC1301BKPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKPC	-	TC1301BKPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKPD	-	TC1301BKPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKPE	-	TC1301BKPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKPF	-	TC1301BKPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKQA	-	TC1301BKQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKQB	-	TC1301BKQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKQC	-	TC1301BKQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKQD	-	TC1301BKQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKQE	-	TC1301BKQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKQF	-	TC1301BKQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKRA	-	TC1301BKRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKRB	-	TC1301BKRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKRC	-	TC1301BKRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKRD	-	TC1301BKRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKRE	-	TC1301BKREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKRF	-	TC1301BKRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKSA	-	TC1301BKSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKSB	-	TC1301BKSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKSC	-	TC1301BKSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKSD	-	TC1301BKSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKSE	-	TC1301BKSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKSF	-	TC1301BKSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKTA	-	TC1301BKTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKTB	-	TC1301BKTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKTC	-	TC1301BKTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKTD	-	TC1301BKTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKTE	-	TC1301BKTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKTF	-	TC1301BKTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKUA	-	TC1301BKUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKUB	-	TC1301BKUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BKUC	-	TC1301BKUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKUD	-	TC1301BKUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKUE	-	TC1301BKUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKUF	-	TC1301BKUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKVA	-	TC1301BKVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKVB	-	TC1301BKVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKVC	-	TC1301BKVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKVD	-	TC1301BKVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKVE	-	TC1301BKVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKVF	-	TC1301BKVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKWA	-	TC1301BKWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKWB	-	TC1301BKWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKWC	-	TC1301BKWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKWD	-	TC1301BKWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKWE	-	TC1301BKWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BKWF	-	TC1301BKWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLAA	-	TC1301BLAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLAB	-	TC1301BLABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLAC	-	TC1301BLACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLAD	-	TC1301BLADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLAE	-	TC1301BLAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLAF	-	TC1301BLAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLBA	-	TC1301BLBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLBB	-	TC1301BLBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLBC	-	TC1301BLBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLBD	-	TC1301BLBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLBE	-	TC1301BLBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLBF	-	TC1301BLBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLCA	-	TC1301BLCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLCB	-	TC1301BLCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLCC	-	TC1301BLCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLCD	-	TC1301BLCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLCE	-	TC1301BLCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLCF	-	TC1301BLCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLDA	-	TC1301BLDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLDB	-	TC1301BLDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLDC	-	TC1301BLDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLDD	-	TC1301BLDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLDE	-	TC1301BLDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLDF	-	TC1301BLDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLEA	-	TC1301BLEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLEB	-	TC1301BLEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLEC	-	TC1301BLECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLED	-	TC1301BLEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLEE	-	TC1301BLEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLEF	-	TC1301BLEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLFA	-	TC1301BLFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLFB	-	TC1301BLFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLFC	-	TC1301BLFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLFD	-	TC1301BLFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLFE	-	TC1301BLFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLFF	-	TC1301BLFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLGA	-	TC1301BLGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLGB	-	TC1301BLGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLGC	-	TC1301BLGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLGD	-	TC1301BLGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLGE	-	TC1301BLGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLGF	-	TC1301BLGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLHA	-	TC1301BLHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLHB	-	TC1301BLHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLHC	-	TC1301BLHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLHD	-	TC1301BLHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLHE	-	TC1301BLHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLHF	-	TC1301BLHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLIA	-	TC1301BLIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLIB	-	TC1301BLIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLIC	-	TC1301BLICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLID	-	TC1301BLIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLIE	-	TC1301BLIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLIF	-	TC1301BLIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BLJA	-	TC1301BLJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLJB	-	TC1301BLJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLJC	-	TC1301BLJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLJD	-	TC1301BLJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLJE	-	TC1301BLJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLJF	-	TC1301BLJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLKA	-	TC1301BLKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLKB	-	TC1301BLKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLKC	-	TC1301BLKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLKD	-	TC1301BLKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLKE	-	TC1301BLKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLKF	-	TC1301BLKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLLA	-	TC1301BLLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLLB	-	TC1301BLLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLLC	-	TC1301BLLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLLD	-	TC1301BLLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLLE	-	TC1301BLLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLLF	-	TC1301BLLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLMA	-	TC1301BLMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLMB	-	TC1301BLMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLMC	-	TC1301BLMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLMD	-	TC1301BLMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLME	-	TC1301BLMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLMF	-	TC1301BLMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLNA	-	TC1301BLNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLNB	-	TC1301BLNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLNC	-	TC1301BLNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLND	-	TC1301BLNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLNE	-	TC1301BLNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLNF	-	TC1301BLNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLOA	-	TC1301BLOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLOB	-	TC1301BLOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLOC	-	TC1301BLOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLOD	-	TC1301BLODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLOE	-	TC1301BLOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLOF	-	TC1301BLOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLPA	-	TC1301BLPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLPB	-	TC1301BLPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLPC	-	TC1301BLPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLPD	-	TC1301BLPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLPE	-	TC1301BLPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLPF	-	TC1301BLPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLQA	-	TC1301BLQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLQB	-	TC1301BLQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLQC	-	TC1301BLQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLQD	-	TC1301BLQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLQE	-	TC1301BLQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLQF	-	TC1301BLQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLRA	-	TC1301BLRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLRB	-	TC1301BLRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLRC	-	TC1301BLRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLRD	-	TC1301BLRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLRE	-	TC1301BLREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLRF	-	TC1301BLRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLSA	-	TC1301BLSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLSB	-	TC1301BLSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLSC	-	TC1301BLSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLSD	-	TC1301BLSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLSE	-	TC1301BLSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLSF	-	TC1301BLSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLTA	-	TC1301BLTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLTB	-	TC1301BLTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLTC	-	TC1301BLTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLTD	-	TC1301BLTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLTE	-	TC1301BLTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLTF	-	TC1301BLTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLUA	-	TC1301BLUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLUB	-	TC1301BLUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLUC	-	TC1301BLUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLUD	-	TC1301BLUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BLUE	-	TC1301BLUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLUF	-	TC1301BLUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLVA	-	TC1301BLVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLVB	-	TC1301BLVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLVC	-	TC1301BLVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLVD	-	TC1301BLVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLVE	-	TC1301BLVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLVF	-	TC1301BLVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLWA	-	TC1301BLWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLWB	-	TC1301BLWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLWC	-	TC1301BLWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLWD	-	TC1301BLWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLWE	-	TC1301BLWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BLWF	-	TC1301BLWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMAA	-	TC1301BMAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMAB	-	TC1301BMABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMAC	-	TC1301BMACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMAD	-	TC1301BMADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMAE	-	TC1301BMAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMAF	-	TC1301BMAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMBA	-	TC1301BMBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMBB	-	TC1301BMBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMBC	-	TC1301BMBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMBD	-	TC1301BMBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMBE	-	TC1301BMBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMBF	-	TC1301BMBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMCA	-	TC1301BMCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMCB	-	TC1301BMCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMCC	-	TC1301BMCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMCD	-	TC1301BMCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMCE	-	TC1301BMCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMCF	-	TC1301BMCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMDA	-	TC1301BMDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMDB	-	TC1301BMDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMDC	-	TC1301BMDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMDD	-	TC1301BMDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMDE	-	TC1301BMDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMDF	-	TC1301BMDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMEA	-	TC1301BMEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMEB	-	TC1301BMEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMEC	-	TC1301BMECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMED	-	TC1301BMEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMEE	-	TC1301BMEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMEF	-	TC1301BMEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMFA	-	TC1301BMFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMFB	-	TC1301BMFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMFC	-	TC1301BMFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMFD	-	TC1301BMFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMFE	-	TC1301BMFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMFF	-	TC1301BMFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMGA	-	TC1301BMGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMGB	-	TC1301BMGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMGC	-	TC1301BMGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMGD	-	TC1301BMGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMGE	-	TC1301BMGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMGF	-	TC1301BMGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMHA	-	TC1301BMHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMHB	-	TC1301BMHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMHC	-	TC1301BMHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMHD	-	TC1301BMHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMHE	-	TC1301BMHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMHF	-	TC1301BMHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMIA	-	TC1301BMIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMIB	-	TC1301BMIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMIC	-	TC1301BMICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMID	-	TC1301BMIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMIE	-	TC1301BMIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMIF	-	TC1301BMIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMJA	-	TC1301BMJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMJB	-	TC1301BMJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BMJC	-	TC1301BMJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMJD	-	TC1301BMJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMJE	-	TC1301BMJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMJF	-	TC1301BMJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMKA	-	TC1301BMKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMKB	-	TC1301BMKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMKC	-	TC1301BMKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMKD	-	TC1301BMKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMKE	-	TC1301BMKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMKF	-	TC1301BMKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMLA	-	TC1301BMLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMLB	-	TC1301BMLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMLC	-	TC1301BMLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMLD	-	TC1301BMLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMLE	-	TC1301BMLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMLF	-	TC1301BMLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMMA	-	TC1301BMMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMMB	-	TC1301BMMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMMC	-	TC1301BMMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMMD	-	TC1301BMMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMME	-	TC1301BMMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMMF	-	TC1301BMMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMNA	-	TC1301BMNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMNB	-	TC1301BMNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMNC	-	TC1301BMNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMND	-	TC1301BMNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMNE	-	TC1301BMNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMNF	-	TC1301BMNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMOA	-	TC1301BMOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMOB	-	TC1301BMOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMOC	-	TC1301BMOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMOD	-	TC1301BMODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMOE	-	TC1301BMOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMOF	-	TC1301BMOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMPA	-	TC1301BMPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMPB	-	TC1301BMPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMPC	-	TC1301BMPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMPD	-	TC1301BMPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMPE	-	TC1301BMPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMPF	-	TC1301BMPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMQA	-	TC1301BMQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMQB	-	TC1301BMQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMQC	-	TC1301BMQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMQD	-	TC1301BMQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMQE	-	TC1301BMQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMQF	-	TC1301BMQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMRA	-	TC1301BMRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMRB	-	TC1301BMRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMRC	-	TC1301BMRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMRD	-	TC1301BMRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMRE	-	TC1301BMREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMRF	-	TC1301BMRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMSA	-	TC1301BMSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMSB	-	TC1301BMSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMSC	-	TC1301BMSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMSD	-	TC1301BMSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMSE	-	TC1301BMSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMSF	-	TC1301BMSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMTA	-	TC1301BMTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMTB	-	TC1301BMTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMTC	-	TC1301BMTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMTD	-	TC1301BMTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMTE	-	TC1301BMTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMTF	-	TC1301BMTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMUA	-	TC1301BMUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMUB	-	TC1301BMUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMUC	-	TC1301BMUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMUD	-	TC1301BMUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMUE	-	TC1301BMUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMUF	-	TC1301BMUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BMVA	-	TC1301BMVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMVB	-	TC1301BMVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMVC	-	TC1301BMVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMVD	-	TC1301BMVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMVE	-	TC1301BMVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMVF	-	TC1301BMVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMWA	-	TC1301BMWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMWB	-	TC1301BMWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMWC	-	TC1301BMWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMWD	-	TC1301BMWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMWE	-	TC1301BMWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BMWF	-	TC1301BMWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNAA	-	TC1301BNAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNAB	-	TC1301BNABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNAC	-	TC1301BNACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNAD	-	TC1301BNADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNAE	-	TC1301BNAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNAF	-	TC1301BNAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNBA	-	TC1301BNBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNBB	-	TC1301BNBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNBC	-	TC1301BNBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNBD	-	TC1301BNBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNBE	-	TC1301BNBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNBF	-	TC1301BNBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNCA	-	TC1301BNCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNCB	-	TC1301BNCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNCC	-	TC1301BNCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNCD	-	TC1301BNCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNCE	-	TC1301BNCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNCF	-	TC1301BNCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNDA	-	TC1301BNDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNDB	-	TC1301BNDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNDC	-	TC1301BNDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNDD	-	TC1301BNDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNDE	-	TC1301BNDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNDF	-	TC1301BNDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNEA	-	TC1301BNEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNEB	-	TC1301BNEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNEC	-	TC1301BNECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNED	-	TC1301BNEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNEE	-	TC1301BNEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNEF	-	TC1301BNEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNFA	-	TC1301BNFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNFB	-	TC1301BNFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNFC	-	TC1301BNFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNFD	-	TC1301BNFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNFE	-	TC1301BNFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNFF	-	TC1301BNFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNGA	-	TC1301BNGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNGB	-	TC1301BNGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNGC	-	TC1301BNGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNGD	-	TC1301BNGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNGE	-	TC1301BNGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNGF	-	TC1301BNGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNHA	-	TC1301BNHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNHB	-	TC1301BNHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNHC	-	TC1301BNHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNHD	-	TC1301BNHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNHE	-	TC1301BNHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNHF	-	TC1301BNHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNIA	-	TC1301BNIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNIB	-	TC1301BNIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNIC	-	TC1301BNICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNID	-	TC1301BNIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNIE	-	TC1301BNIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNIF	-	TC1301BNIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNJA	-	TC1301BNJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNJB	-	TC1301BNJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNJC	-	TC1301BNJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNJD	-	TC1301BNJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BNJE	-	TC1301BNJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNJF	-	TC1301BNJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNKA	-	TC1301BNKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNKB	-	TC1301BNKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNKC	-	TC1301BNKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNKD	-	TC1301BNKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNKE	-	TC1301BNKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNKF	-	TC1301BNKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNLA	-	TC1301BNLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNLB	-	TC1301BNLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNLC	-	TC1301BNLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNLD	-	TC1301BNLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNLE	-	TC1301BNLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNLF	-	TC1301BNLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNMA	-	TC1301BNMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNMB	-	TC1301BNMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNMC	-	TC1301BNMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNMD	-	TC1301BNMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNME	-	TC1301BNMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNMF	-	TC1301BNMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNNA	-	TC1301BNNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNNB	-	TC1301BNNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNNC	-	TC1301BNNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNND	-	TC1301BNNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNNE	-	TC1301BNNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNNF	-	TC1301BNNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNOA	-	TC1301BNOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNOB	-	TC1301BNOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNOC	-	TC1301BNOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNOD	-	TC1301BNODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNOE	-	TC1301BNOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNOF	-	TC1301BNOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNPA	-	TC1301BNPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNPB	-	TC1301BNPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNPC	-	TC1301BNPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNPD	-	TC1301BNPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNPE	-	TC1301BNPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNPF	-	TC1301BNPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNQA	-	TC1301BNQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNQB	-	TC1301BNQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNQC	-	TC1301BNQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNQD	-	TC1301BNQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNQE	-	TC1301BNQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNQF	-	TC1301BNQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNRA	-	TC1301BNRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNRB	-	TC1301BNRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNRC	-	TC1301BNRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNRD	-	TC1301BNRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNRE	-	TC1301BNREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNRF	-	TC1301BNRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNSA	-	TC1301BNSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNSB	-	TC1301BNSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNSC	-	TC1301BNSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNSD	-	TC1301BNSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNSE	-	TC1301BNSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNSF	-	TC1301BNSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNTA	-	TC1301BNTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNTB	-	TC1301BNTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNTC	-	TC1301BNTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNTD	-	TC1301BNTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNTE	-	TC1301BNTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNTF	-	TC1301BNTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNUA	-	TC1301BNUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNUB	-	TC1301BNUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNUC	-	TC1301BNUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNUD	-	TC1301BNUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNUE	-	TC1301BNUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNUF	-	TC1301BNUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNVA	-	TC1301BNVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNVB	-	TC1301BNVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BNVC	-	TC1301BNVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNVD	-	TC1301BNVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNVE	-	TC1301BNVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNVF	-	TC1301BNVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNWA	-	TC1301BNWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNWB	-	TC1301BNWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNWC	-	TC1301BNWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNWD	-	TC1301BNWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNWE	-	TC1301BNWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BNWF	-	TC1301BNWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOAA	-	TC1301BOAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOAB	-	TC1301BOABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOAC	-	TC1301BOACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOAD	-	TC1301BOADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOAE	-	TC1301BOAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOAF	-	TC1301BOAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOBA	-	TC1301BOBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOBB	-	TC1301BOBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOBC	-	TC1301BOBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOBD	-	TC1301BOBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOBE	-	TC1301BOBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOBF	-	TC1301BOBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOCA	-	TC1301BOCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOCB	-	TC1301BOCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOCC	-	TC1301BOCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOCD	-	TC1301BOCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOCE	-	TC1301BOCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOCF	-	TC1301BOCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BODA	-	TC1301BODAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BODB	-	TC1301BODBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BODC	-	TC1301BODCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BODD	-	TC1301BODDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BODE	-	TC1301BODEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BODF	-	TC1301BODFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOEA	-	TC1301BOEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOEB	-	TC1301BOEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOEC	-	TC1301BOECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOED	-	TC1301BOEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOEE	-	TC1301BOEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOEF	-	TC1301BOEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOFA	-	TC1301BOFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOFB	-	TC1301BOFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOFC	-	TC1301BOFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOFD	-	TC1301BOFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOFE	-	TC1301BOFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOFF	-	TC1301BOFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOGA	-	TC1301BOGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOGB	-	TC1301BOGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOGC	-	TC1301BOGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOGD	-	TC1301BOGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOGE	-	TC1301BOGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOGF	-	TC1301BOGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOHA	-	TC1301BOHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOHB	-	TC1301BOHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOHC	-	TC1301BOHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOHD	-	TC1301BOHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOHE	-	TC1301BOHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOHF	-	TC1301BOHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOIA	-	TC1301BOIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOIB	-	TC1301BOIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOIC	-	TC1301BOICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOID	-	TC1301BOIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOIE	-	TC1301BOIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOIF	-	TC1301BOIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOJA	-	TC1301BOJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOJB	-	TC1301BOJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOJC	-	TC1301BOJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOJD	-	TC1301BOJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOJE	-	TC1301BOJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOJF	-	TC1301BOJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BOKA	-	TC1301BOKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOKB	-	TC1301BOKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOKC	-	TC1301BOKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOKD	-	TC1301BOKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOKE	-	TC1301BOKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOKF	-	TC1301BOKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOLA	-	TC1301BOLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOLB	-	TC1301BOLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOLC	-	TC1301BOLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOLD	-	TC1301BOLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOLE	-	TC1301BOLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOLF	-	TC1301BOLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOMA	-	TC1301BOMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOMB	-	TC1301BOMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOMC	-	TC1301BOMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOMD	-	TC1301BOMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOME	-	TC1301BOMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOMF	-	TC1301BOMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BONA	-	TC1301BONAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BONB	-	TC1301BONBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BONC	-	TC1301BONCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOND	-	TC1301BONDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BONE	-	TC1301BONEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BONF	-	TC1301BONFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOOA	-	TC1301BOOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOOB	-	TC1301BOOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOOC	-	TC1301BOOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOOD	-	TC1301BOODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOOE	-	TC1301BOOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOOF	-	TC1301BOOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOPA	-	TC1301BOPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOPB	-	TC1301BOPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOPC	-	TC1301BOPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOPD	-	TC1301BOPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOPE	-	TC1301BOPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOPF	-	TC1301BOPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOQA	-	TC1301BOQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOQB	-	TC1301BOQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOQC	-	TC1301BOQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOQD	-	TC1301BOQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOQE	-	TC1301BOQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOQF	-	TC1301BOQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BORA	-	TC1301BORAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BORB	-	TC1301BORBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BORC	-	TC1301BORCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BORD	-	TC1301BORDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BORE	-	TC1301BOREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BORF	-	TC1301BORFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOSA	-	TC1301BOSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOSB	-	TC1301BOSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOSC	-	TC1301BOSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOSD	-	TC1301BOSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOSE	-	TC1301BOSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOSF	-	TC1301BOSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOTA	-	TC1301BOTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOTB	-	TC1301BOTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOTC	-	TC1301BOTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOTD	-	TC1301BOTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOTE	-	TC1301BOTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOTF	-	TC1301BOTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOUA	-	TC1301BOUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOUB	-	TC1301BOUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOUC	-	TC1301BOUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOUD	-	TC1301BOUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOUE	-	TC1301BOUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOUF	-	TC1301BOUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOVA	-	TC1301BOVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOVB	-	TC1301BOVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOVC	-	TC1301BOVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOVD	-	TC1301BOVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BOVE	-	TC1301BOVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOVF	-	TC1301BOVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOWA	-	TC1301BOWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOWB	-	TC1301BOWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOWC	-	TC1301BOWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOWD	-	TC1301BOWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOWE	-	TC1301BOWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BOWF	-	TC1301BOWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPAA	-	TC1301BPAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPAB	-	TC1301BPABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPAC	-	TC1301BPACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPAD	-	TC1301BPADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPAE	-	TC1301BPAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPAF	-	TC1301BPAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPBA	-	TC1301BPBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPBB	-	TC1301BPBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPBC	-	TC1301BPBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPBD	-	TC1301BPBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPBE	-	TC1301BPBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPBF	-	TC1301BPBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPCA	-	TC1301BPCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPCB	-	TC1301BPCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPCC	-	TC1301BPCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPCD	-	TC1301BPCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPCE	-	TC1301BPCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPCF	-	TC1301BPCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPDA	-	TC1301BPDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPDB	-	TC1301BPDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPDC	-	TC1301BPDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPDD	-	TC1301BPDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPDE	-	TC1301BPDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPDF	-	TC1301BPDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPEA	-	TC1301BPEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPEB	-	TC1301BPEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPEC	-	TC1301BPECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPED	-	TC1301BPEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPEE	-	TC1301BPEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPEF	-	TC1301BPEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPFA	-	TC1301BPFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPFB	-	TC1301BPFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPFC	-	TC1301BPFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPFD	-	TC1301BPFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPFE	-	TC1301BPFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPFF	-	TC1301BPFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPGA	-	TC1301BPGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPGB	-	TC1301BPGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPGC	-	TC1301BPGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPGD	-	TC1301BPGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPGE	-	TC1301BPGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPGF	-	TC1301BPGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPHA	-	TC1301BPHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPHB	-	TC1301BPHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPHC	-	TC1301BPHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPHD	-	TC1301BPHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPHE	-	TC1301BPHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPHF	-	TC1301BPHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPIA	-	TC1301BPIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPIB	-	TC1301BPIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPIC	-	TC1301BPICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPID	-	TC1301BPIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPIE	-	TC1301BPIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPIF	-	TC1301BPIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPJA	-	TC1301BPJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPJB	-	TC1301BPJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPJC	-	TC1301BPJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPJD	-	TC1301BPJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPJE	-	TC1301BPJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPJF	-	TC1301BPJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPKA	-	TC1301BPKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPKB	-	TC1301BPKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BPKC	-	TC1301BPKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPKD	-	TC1301BPKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPKE	-	TC1301BPKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPKF	-	TC1301BPKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPLA	-	TC1301BPLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPLB	-	TC1301BPLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPLC	-	TC1301BPLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPLD	-	TC1301BPLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPLE	-	TC1301BPLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPLF	-	TC1301BPLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPMA	-	TC1301BPMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPMB	-	TC1301BPMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPMC	-	TC1301BPMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPMD	-	TC1301BPMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPME	-	TC1301BPMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPMF	-	TC1301BPMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPNA	-	TC1301BPNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPNB	-	TC1301BPNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPNC	-	TC1301BPNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPND	-	TC1301BPNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPNE	-	TC1301BPNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPNF	-	TC1301BPNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPOA	-	TC1301BPOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPOB	-	TC1301BPOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPOC	-	TC1301BPOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPOD	-	TC1301BPODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPOE	-	TC1301BPOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPOF	-	TC1301BPOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPPA	-	TC1301BPPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPPB	-	TC1301BPPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPPC	-	TC1301BPPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPPD	-	TC1301BPPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPPE	-	TC1301BPPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPPF	-	TC1301BPPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPQA	-	TC1301BPQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPQB	-	TC1301BPQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPQC	-	TC1301BPQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPQD	-	TC1301BPQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPQE	-	TC1301BPQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPQF	-	TC1301BPQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPRA	-	TC1301BPRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPRB	-	TC1301BPRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPRC	-	TC1301BPRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPRD	-	TC1301BPRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPRE	-	TC1301BPREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPRF	-	TC1301BPRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPSA	-	TC1301BPSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPSB	-	TC1301BPSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPSC	-	TC1301BPSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPSD	-	TC1301BPSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPSE	-	TC1301BPSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPSF	-	TC1301BPSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPTA	-	TC1301BPTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPTB	-	TC1301BPTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPTC	-	TC1301BPTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPTD	-	TC1301BPTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPTE	-	TC1301BPTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPTF	-	TC1301BPTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPUA	-	TC1301BPUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPUB	-	TC1301BPUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPUC	-	TC1301BPUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPUD	-	TC1301BPUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPUE	-	TC1301BPUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPUF	-	TC1301BPUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPVA	-	TC1301BPVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPVB	-	TC1301BPVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPVC	-	TC1301BPVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPVD	-	TC1301BPVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPVE	-	TC1301BPVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPVF	-	TC1301BPVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BPWA	-	TC1301BPWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPWB	-	TC1301BPWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPWC	-	TC1301BPWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPWD	-	TC1301BPWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPWE	-	TC1301BPWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BPWF	-	TC1301BPWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQAA	-	TC1301BQAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQAB	-	TC1301BQABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQAC	-	TC1301BQACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQAD	-	TC1301BQADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQAE	-	TC1301BQAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQAF	-	TC1301BQAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQBA	-	TC1301BQBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQBB	-	TC1301BQBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQBC	-	TC1301BQBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQBD	-	TC1301BQBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQBE	-	TC1301BQBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQBF	-	TC1301BQBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQCA	-	TC1301BQCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQCB	-	TC1301BQCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQCC	-	TC1301BQCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQCD	-	TC1301BQCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQCE	-	TC1301BQCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQCF	-	TC1301BQCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQDA	-	TC1301BQDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQDB	-	TC1301BQDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQDC	-	TC1301BQDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQDD	-	TC1301BQDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQDE	-	TC1301BQDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQDF	-	TC1301BQDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQEA	-	TC1301BQEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQEB	-	TC1301BQEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQEC	-	TC1301BQECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQED	-	TC1301BQEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQEE	-	TC1301BQEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQEF	-	TC1301BQEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQFA	-	TC1301BQFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQFB	-	TC1301BQFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQFC	-	TC1301BQFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQFD	-	TC1301BQFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQFE	-	TC1301BQFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQFF	-	TC1301BQFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQGA	-	TC1301BQGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQGB	-	TC1301BQGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQGC	-	TC1301BQGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQGD	-	TC1301BQGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQGE	-	TC1301BQGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQGF	-	TC1301BQGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQHA	-	TC1301BQHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQHB	-	TC1301BQHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQHC	-	TC1301BQHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQHD	-	TC1301BQHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQHE	-	TC1301BQHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQHF	-	TC1301BQHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQIA	-	TC1301BQIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQIB	-	TC1301BQIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQIC	-	TC1301BQICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQID	-	TC1301BQIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQIE	-	TC1301BQIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQIF	-	TC1301BQIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQJA	-	TC1301BQJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQJB	-	TC1301BQJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQJC	-	TC1301BQJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQJD	-	TC1301BQJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQJE	-	TC1301BQJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQJF	-	TC1301BQJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQKA	-	TC1301BQKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQKB	-	TC1301BQKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQKC	-	TC1301BQKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQKD	-	TC1301BQKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BQKE	-	TC1301BQKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQKF	-	TC1301BQKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQLA	-	TC1301BQLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQLB	-	TC1301BQLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQLC	-	TC1301BQLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQLD	-	TC1301BQLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQLE	-	TC1301BQLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQLF	-	TC1301BQLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQMA	-	TC1301BQMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQMB	-	TC1301BQMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQMC	-	TC1301BQMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQMD	-	TC1301BQMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQME	-	TC1301BQMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQMF	-	TC1301BQMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQNA	-	TC1301BQNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQNB	-	TC1301BQNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQNC	-	TC1301BQNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQND	-	TC1301BQNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQNE	-	TC1301BQNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQNF	-	TC1301BQNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQOA	-	TC1301BQOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQOB	-	TC1301BQOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQOC	-	TC1301BQOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQOD	-	TC1301BQODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQOE	-	TC1301BQOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQOF	-	TC1301BQOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQPA	-	TC1301BQPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQPB	-	TC1301BQPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQPC	-	TC1301BQPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQPD	-	TC1301BQPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQPE	-	TC1301BQPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQPF	-	TC1301BQPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQQA	-	TC1301BQQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQQB	-	TC1301BQQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQQC	-	TC1301BQQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQQD	-	TC1301BQQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQQE	-	TC1301BQQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQQF	-	TC1301BQQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQRA	-	TC1301BQRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQRB	-	TC1301BQRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQRC	-	TC1301BQRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQRD	-	TC1301BQRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQRE	-	TC1301BQREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQRF	-	TC1301BQRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQSA	-	TC1301BQSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQSB	-	TC1301BQSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQSC	-	TC1301BQSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQSD	-	TC1301BQSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQSE	-	TC1301BQSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQSF	-	TC1301BQSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQTA	-	TC1301BQTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQTB	-	TC1301BQTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQTC	-	TC1301BQTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQTD	-	TC1301BQTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQTE	-	TC1301BQTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQTF	-	TC1301BQTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQUA	-	TC1301BQUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQUB	-	TC1301BQUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQUC	-	TC1301BQUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQUD	-	TC1301BQUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQUE	-	TC1301BQUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQUF	-	TC1301BQUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQVA	-	TC1301BQVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQVB	-	TC1301BQVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQVC	-	TC1301BQVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQVD	-	TC1301BQVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQVE	-	TC1301BQVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQVF	-	TC1301BQVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQWA	-	TC1301BQWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQWB	-	TC1301BQWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BQWC	-	TC1301BQWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQWD	-	TC1301BQWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQWE	-	TC1301BQWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BQWF	-	TC1301BQWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRAA	-	TC1301BRAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRAB	-	TC1301BRABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRAC	-	TC1301BRACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRAD	-	TC1301BRADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRAE	-	TC1301BRAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRAF	-	TC1301BRAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRBA	-	TC1301BRBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRBB	-	TC1301BRBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRBC	-	TC1301BRBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRBD	-	TC1301BRBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRBE	-	TC1301BRBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRBF	-	TC1301BRBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRCA	-	TC1301BRCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRCB	-	TC1301BRCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRCC	-	TC1301BRCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRCD	-	TC1301BRCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRCE	-	TC1301BRCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRCF	-	TC1301BRCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRDA	-	TC1301BRDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRDB	-	TC1301BRDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRDC	-	TC1301BRDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRDD	-	TC1301BRDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRDE	-	TC1301BRDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRDF	-	TC1301BRDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BREA	-	TC1301BREAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BREB	-	TC1301BREBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BREC	-	TC1301BRECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRED	-	TC1301BREDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BREE	-	TC1301BREEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BREF	-	TC1301BREFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRFA	-	TC1301BRFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRFB	-	TC1301BRFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRFC	-	TC1301BRFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRFD	-	TC1301BRFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRFE	-	TC1301BRFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRFF	-	TC1301BRFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRGA	-	TC1301BRGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRGB	-	TC1301BRGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRGC	-	TC1301BRGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRGD	-	TC1301BRGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRGE	-	TC1301BRGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRGF	-	TC1301BRGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRHA	-	TC1301BRHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRHB	-	TC1301BRHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRHC	-	TC1301BRHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRHD	-	TC1301BRHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRHE	-	TC1301BRHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRHF	-	TC1301BRHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRIA	-	TC1301BRIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRIB	-	TC1301BRIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRIC	-	TC1301BRICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRID	-	TC1301BRIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRIE	-	TC1301BRIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRIF	-	TC1301BRIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRJA	-	TC1301BRJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRJB	-	TC1301BRJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRJC	-	TC1301BRJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRJD	-	TC1301BRJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRJE	-	TC1301BRJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRJF	-	TC1301BRJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRKA	-	TC1301BRKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRKB	-	TC1301BRKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRKC	-	TC1301BRKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRKD	-	TC1301BRKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRKE	-	TC1301BRKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRKF	-	TC1301BRKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BRLA	-	TC1301BRLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRLB	-	TC1301BRLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRLC	-	TC1301BRLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRLD	-	TC1301BRLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRLE	-	TC1301BRLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRLF	-	TC1301BRLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRMA	-	TC1301BRMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRMB	-	TC1301BRMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRMC	-	TC1301BRMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRMD	-	TC1301BRMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRME	-	TC1301BRMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRMF	-	TC1301BRMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRNA	-	TC1301BRNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRNB	-	TC1301BRNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRNC	-	TC1301BRNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRND	-	TC1301BRNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRNE	-	TC1301BRNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRNF	-	TC1301BRNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BROA	-	TC1301BROAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BROB	-	TC1301BROBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BROC	-	TC1301BROCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BROD	-	TC1301BRODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BROE	-	TC1301BROEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BROF	-	TC1301BROFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRPA	-	TC1301BRPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRPB	-	TC1301BRPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRPC	-	TC1301BRPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRPD	-	TC1301BRPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRPE	-	TC1301BRPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRPF	-	TC1301BRPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRQA	-	TC1301BRQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRQB	-	TC1301BRQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRQC	-	TC1301BRQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRQD	-	TC1301BRQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRQE	-	TC1301BRQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRQF	-	TC1301BRQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRRA	-	TC1301BRRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRRB	-	TC1301BRRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRRC	-	TC1301BRRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRRD	-	TC1301BRRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRRE	-	TC1301BRREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRRF	-	TC1301BRRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRSA	-	TC1301BRSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRSB	-	TC1301BRSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRSC	-	TC1301BRSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRSD	-	TC1301BRSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRSE	-	TC1301BRSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRSF	-	TC1301BRSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRTA	-	TC1301BRTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRTB	-	TC1301BRTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRTC	-	TC1301BRTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRTD	-	TC1301BRTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRTE	-	TC1301BRTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRTF	-	TC1301BRTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRUA	-	TC1301BRUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRUB	-	TC1301BRUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRUC	-	TC1301BRUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRUD	-	TC1301BRUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRUE	-	TC1301BRUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRUF	-	TC1301BRUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRVA	-	TC1301BRVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRVB	-	TC1301BRVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRVC	-	TC1301BRVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRVD	-	TC1301BRVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRVE	-	TC1301BRVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRVF	-	TC1301BRVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRWA	-	TC1301BRWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRWB	-	TC1301BRWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRWC	-	TC1301BRWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRWD	-	TC1301BRWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BRWE	-	TC1301BRWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BRWF	-	TC1301BRWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSAA	-	TC1301BSAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSAB	-	TC1301BSABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSAC	-	TC1301BSACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSAD	-	TC1301BSADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSAE	-	TC1301BSAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSAF	-	TC1301BSAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSBA	-	TC1301BSBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSBB	-	TC1301BSBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSBC	-	TC1301BSBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSBD	-	TC1301BSBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSBE	-	TC1301BSBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSBF	-	TC1301BSBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSCA	-	TC1301BSCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSCB	-	TC1301BSCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSCC	-	TC1301BSCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSCD	-	TC1301BSCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSCE	-	TC1301BSCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSCF	-	TC1301BSCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSDA	-	TC1301BSDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSDB	-	TC1301BSDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSDC	-	TC1301BSDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSDD	-	TC1301BSDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSDE	-	TC1301BSDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSDF	-	TC1301BSDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSEA	-	TC1301BSEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSEB	-	TC1301BSEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSEC	-	TC1301BSECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSED	-	TC1301BSEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSEE	-	TC1301BSEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSEF	-	TC1301BSEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSFA	-	TC1301BSFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSFB	-	TC1301BSFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSFC	-	TC1301BSFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSFD	-	TC1301BSFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSFE	-	TC1301BSFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSFF	-	TC1301BSFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSGA	-	TC1301BSGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSGB	-	TC1301BSGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSGC	-	TC1301BSGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSGD	-	TC1301BSGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSGE	-	TC1301BSGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSGF	-	TC1301BSGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSHA	-	TC1301BSHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSHB	-	TC1301BSHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSHC	-	TC1301BSHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSHD	-	TC1301BSHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSHE	-	TC1301BSHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSHF	-	TC1301BSHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSIA	-	TC1301BSIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSIB	-	TC1301BSIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSIC	-	TC1301BSICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSID	-	TC1301BSIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSIE	-	TC1301BSIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSIF	-	TC1301BSIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSJA	-	TC1301BSJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSJB	-	TC1301BSJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSJC	-	TC1301BSJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSJD	-	TC1301BSJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSJE	-	TC1301BSJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSJF	-	TC1301BSJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSKA	-	TC1301BSKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSKB	-	TC1301BSKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSKC	-	TC1301BSKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSKD	-	TC1301BSKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSKE	-	TC1301BSKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSKF	-	TC1301BSKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSLA	-	TC1301BSLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSLB	-	TC1301BSLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BSLC	-	TC1301BSLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSLD	-	TC1301BSLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSLE	-	TC1301BSLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSLF	-	TC1301BSLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSMA	-	TC1301BSMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSMB	-	TC1301BSMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSMC	-	TC1301BSMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSMD	-	TC1301BSMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSME	-	TC1301BSMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSMF	-	TC1301BSMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSNA	-	TC1301BSNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSNB	-	TC1301BSNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSNC	-	TC1301BSNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSND	-	TC1301BSNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSNE	-	TC1301BSNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSNF	-	TC1301BSNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSOA	-	TC1301BSOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSOB	-	TC1301BSOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSOC	-	TC1301BSOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSOD	-	TC1301BSODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSOE	-	TC1301BSOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSOF	-	TC1301BSOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSPA	-	TC1301BSPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSPB	-	TC1301BSPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSPC	-	TC1301BSPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSPD	-	TC1301BSPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSPE	-	TC1301BSPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSPF	-	TC1301BSPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSQA	-	TC1301BSQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSQB	-	TC1301BSQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSQC	-	TC1301BSQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSQD	-	TC1301BSQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSQE	-	TC1301BSQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSQF	-	TC1301BSQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSRA	-	TC1301BSRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSRB	-	TC1301BSRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSRC	-	TC1301BSRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSRD	-	TC1301BSRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSRE	-	TC1301BSREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSRF	-	TC1301BSRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSSA	-	TC1301BSSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSSB	-	TC1301BSSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSSC	-	TC1301BSSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSSD	-	TC1301BSSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSSE	-	TC1301BSSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSSF	-	TC1301BSSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSTA	-	TC1301BSTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSTB	-	TC1301BSTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSTC	-	TC1301BSTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSTD	-	TC1301BSTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSTE	-	TC1301BSTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSTF	-	TC1301BSTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSUA	-	TC1301BSUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSUB	-	TC1301BSUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSUC	-	TC1301BSUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSUD	-	TC1301BSUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSUE	-	TC1301BSUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSUF	-	TC1301BSUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSVA	-	TC1301BSVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSVB	-	TC1301BSVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSVC	-	TC1301BSVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSVD	-	TC1301BSVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSVE	-	TC1301BSVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSVF	-	TC1301BSVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSWA	-	TC1301BSWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSWB	-	TC1301BSWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSWC	-	TC1301BSWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSWD	-	TC1301BSWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSWE	-	TC1301BSWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BSWF	-	TC1301BSWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BTAA	-	TC1301BTAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTAB	-	TC1301BTABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTAC	-	TC1301BTACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTAD	-	TC1301BTADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTAE	-	TC1301BTAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTAF	-	TC1301BTAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTBA	-	TC1301BTBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTBB	-	TC1301BTBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTBC	-	TC1301BTBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTBD	-	TC1301BTBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTBE	-	TC1301BTBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTBF	-	TC1301BTBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTCA	-	TC1301BTCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTCB	-	TC1301BTCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTCC	-	TC1301BTCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTCD	-	TC1301BTCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTCE	-	TC1301BTCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTCF	-	TC1301BTCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTDA	-	TC1301BTDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTDB	-	TC1301BTDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTDC	-	TC1301BTDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTDD	-	TC1301BTDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTDE	-	TC1301BTDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTDF	-	TC1301BTDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTEA	-	TC1301BTEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTEB	-	TC1301BTEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTEC	-	TC1301BTECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTED	-	TC1301BTEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTEE	-	TC1301BTEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTEF	-	TC1301BTEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTFA	-	TC1301BTFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTFB	-	TC1301BTFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTFC	-	TC1301BTFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTFD	-	TC1301BTFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTFE	-	TC1301BTFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTFF	-	TC1301BTFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTGA	-	TC1301BTGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTGB	-	TC1301BTGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTGC	-	TC1301BTGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTGD	-	TC1301BTGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTGE	-	TC1301BTGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTGF	-	TC1301BTGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTHA	-	TC1301BTHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTHB	-	TC1301BTHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTHC	-	TC1301BTHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTHD	-	TC1301BTHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTHE	-	TC1301BTHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTHF	-	TC1301BTHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTIA	-	TC1301BTIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTIB	-	TC1301BTIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTIC	-	TC1301BTICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTID	-	TC1301BTIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTIE	-	TC1301BTIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTIF	-	TC1301BTIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTJA	-	TC1301BTJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTJB	-	TC1301BTJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTJC	-	TC1301BTJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTJD	-	TC1301BTJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTJE	-	TC1301BTJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTJF	-	TC1301BTJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTKA	-	TC1301BTKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTKB	-	TC1301BTKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTKC	-	TC1301BTKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTKD	-	TC1301BTKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTKE	-	TC1301BTKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTKF	-	TC1301BTKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTLA	-	TC1301BTLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTLB	-	TC1301BTLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTLC	-	TC1301BTLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTLD	-	TC1301BTLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BTLE	-	TC1301BTLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTLF	-	TC1301BTLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTMA	-	TC1301BTMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTMB	-	TC1301BTMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTMC	-	TC1301BTMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTMD	-	TC1301BTMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTME	-	TC1301BTMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTMF	-	TC1301BTMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTNA	-	TC1301BTNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTNB	-	TC1301BTNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTNC	-	TC1301BTNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTND	-	TC1301BTNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTNE	-	TC1301BTNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTNF	-	TC1301BTNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTOA	-	TC1301BTOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTOB	-	TC1301BTOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTOC	-	TC1301BTOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTOD	-	TC1301BTODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTOE	-	TC1301BTOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTOF	-	TC1301BTOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTPA	-	TC1301BTPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTPB	-	TC1301BTPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTPC	-	TC1301BTPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTPD	-	TC1301BTPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTPE	-	TC1301BTPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTPF	-	TC1301BTPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTQA	-	TC1301BTQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTQB	-	TC1301BTQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTQC	-	TC1301BTQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTQD	-	TC1301BTQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTQE	-	TC1301BTQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTQF	-	TC1301BTQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTRA	-	TC1301BTRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTRB	-	TC1301BTRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTRC	-	TC1301BTRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTRD	-	TC1301BTRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTRE	-	TC1301BTREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTRF	-	TC1301BTRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTSA	-	TC1301BTSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTSB	-	TC1301BTSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTSC	-	TC1301BTSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTSD	-	TC1301BTSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTSE	-	TC1301BTSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTSF	-	TC1301BTSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTTA	-	TC1301BTTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTTB	-	TC1301BTTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTTC	-	TC1301BTTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTTD	-	TC1301BTTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTTE	-	TC1301BTTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTTF	-	TC1301BTTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTUA	-	TC1301BTUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTUB	-	TC1301BTUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTUC	-	TC1301BTUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTUD	-	TC1301BTUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTUE	-	TC1301BTUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTUF	-	TC1301BTUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTVA	-	TC1301BTVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTVB	-	TC1301BTVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTVC	-	TC1301BTVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTVD	-	TC1301BTVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTVE	-	TC1301BTVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTVF	-	TC1301BTVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTWA	-	TC1301BTWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTWB	-	TC1301BTWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTWC	-	TC1301BTWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTWD	-	TC1301BTWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTWE	-	TC1301BTWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BTWF	-	TC1301BTWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUAA	-	TC1301BUAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUAB	-	TC1301BUABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BUAC	-	TC1301BUACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUAD	-	TC1301BUADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUAE	-	TC1301BUAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUAF	-	TC1301BUAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUBA	-	TC1301BUBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUBB	-	TC1301BUBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUBC	-	TC1301BUBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUBD	-	TC1301BUBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUBE	-	TC1301BUBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUBF	-	TC1301BUBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUCA	-	TC1301BUCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUCB	-	TC1301BUCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUCC	-	TC1301BUCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUCD	-	TC1301BUCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUCE	-	TC1301BUCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUCF	-	TC1301BUCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUDA	-	TC1301BUDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUDB	-	TC1301BUDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUDC	-	TC1301BUDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUDD	-	TC1301BUDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUDE	-	TC1301BUDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUDF	-	TC1301BUDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUEA	-	TC1301BUEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUEB	-	TC1301BUEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUEC	-	TC1301BUECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUED	-	TC1301BUEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUEE	-	TC1301BUEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUEF	-	TC1301BUEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUFA	-	TC1301BUFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUFB	-	TC1301BUFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUFC	-	TC1301BUFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUFD	-	TC1301BUFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUFE	-	TC1301BUFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUFF	-	TC1301BUFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUGA	-	TC1301BUGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUGB	-	TC1301BUGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUGC	-	TC1301BUGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUGD	-	TC1301BUGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUGE	-	TC1301BUGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUGF	-	TC1301BUGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUHA	-	TC1301BUHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUHB	-	TC1301BUHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUHC	-	TC1301BUHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUHD	-	TC1301BUHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUHE	-	TC1301BUHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUHF	-	TC1301BUHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUIA	-	TC1301BUIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUIB	-	TC1301BUIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUIC	-	TC1301BUICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUID	-	TC1301BUIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUIE	-	TC1301BUIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUIF	-	TC1301BUIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUJA	-	TC1301BUJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUJB	-	TC1301BUJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUJC	-	TC1301BUJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUJD	-	TC1301BUJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUJE	-	TC1301BUJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUJF	-	TC1301BUJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUKA	-	TC1301BUKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUKB	-	TC1301BUKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUKC	-	TC1301BUKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUKD	-	TC1301BUKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUKE	-	TC1301BUKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUKF	-	TC1301BUKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BULA	-	TC1301BULAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BULB	-	TC1301BULBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BULC	-	TC1301BULCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BULD	-	TC1301BULDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BULE	-	TC1301BULEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BULF	-	TC1301BULFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BUMA	-	TC1301BUMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUMB	-	TC1301BUMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUMC	-	TC1301BUMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUMD	-	TC1301BUMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUME	-	TC1301BUMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUMF	-	TC1301BUMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUNA	-	TC1301BUNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUNB	-	TC1301BUNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUNC	-	TC1301BUNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUND	-	TC1301BUNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUNE	-	TC1301BUNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUNF	-	TC1301BUNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUOA	-	TC1301BUOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUOB	-	TC1301BUOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUOC	-	TC1301BUOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUOD	-	TC1301BUODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUOE	-	TC1301BUOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUOF	-	TC1301BUOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUPA	-	TC1301BUPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUPB	-	TC1301BUPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUPC	-	TC1301BUPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUPD	-	TC1301BUPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUPE	-	TC1301BUPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUPF	-	TC1301BUPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUQA	-	TC1301BUQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUQB	-	TC1301BUQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUQC	-	TC1301BUQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUQD	-	TC1301BUQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUQE	-	TC1301BUQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUQF	-	TC1301BUQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BURA	-	TC1301BURAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BURB	-	TC1301BURBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BURC	-	TC1301BURCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BURD	-	TC1301BURDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BURE	-	TC1301BUREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BURF	-	TC1301BURFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUSA	-	TC1301BUSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUSB	-	TC1301BUSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUSC	-	TC1301BUSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUSD	-	TC1301BUSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUSE	-	TC1301BUSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUSF	-	TC1301BUSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUTA	-	TC1301BUTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUTB	-	TC1301BUTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUTC	-	TC1301BUTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUTD	-	TC1301BUTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUTE	-	TC1301BUTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUTF	-	TC1301BUTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUUA	-	TC1301BUUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUUB	-	TC1301BUUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUUC	-	TC1301BUUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUUD	-	TC1301BUUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUUE	-	TC1301BUUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUUF	-	TC1301BUUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUVA	-	TC1301BUVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUVB	-	TC1301BUVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUVC	-	TC1301BUVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUVD	-	TC1301BUVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUVE	-	TC1301BUVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUVF	-	TC1301BUVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUWA	-	TC1301BUWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUWB	-	TC1301BUWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUWC	-	TC1301BUWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUWD	-	TC1301BUWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUWE	-	TC1301BUWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BUWF	-	TC1301BUWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVAA	-	TC1301BVAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVAB	-	TC1301BVABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVAC	-	TC1301BVACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVAD	-	TC1301BVADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BVAE	-	TC1301BVAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVAF	-	TC1301BVAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVBA	-	TC1301BVBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVBB	-	TC1301BVBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVBC	-	TC1301BVBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVBD	-	TC1301BVBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVBE	-	TC1301BVBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVBF	-	TC1301BVBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVCA	-	TC1301BVCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVCB	-	TC1301BVCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVCC	-	TC1301BVCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVCD	-	TC1301BVCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVCE	-	TC1301BVCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVCF	-	TC1301BVCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVDA	-	TC1301BVDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVDB	-	TC1301BVDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVDC	-	TC1301BVDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVDD	-	TC1301BVDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVDE	-	TC1301BVDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVDF	-	TC1301BVDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVEA	-	TC1301BVEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVEB	-	TC1301BVEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVEC	-	TC1301BVECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVED	-	TC1301BVEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVEE	-	TC1301BVEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVEF	-	TC1301BVEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVFA	-	TC1301BVFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVFB	-	TC1301BVFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVFC	-	TC1301BVFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVFD	-	TC1301BVFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVFE	-	TC1301BVFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVFF	-	TC1301BVFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVGA	-	TC1301BVGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVGB	-	TC1301BVGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVGC	-	TC1301BVGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVGD	-	TC1301BVGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVGE	-	TC1301BVGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVGF	-	TC1301BVGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVHA	-	TC1301BVHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVHB	-	TC1301BVHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVHC	-	TC1301BVHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVHD	-	TC1301BVHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVHE	-	TC1301BVHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVHF	-	TC1301BVHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVIA	-	TC1301BVIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVIB	-	TC1301BVIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVIC	-	TC1301BVICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVID	-	TC1301BVIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVIE	-	TC1301BVIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVIF	-	TC1301BVIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVJA	-	TC1301BVJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVJB	-	TC1301BVJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVJC	-	TC1301BVJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVJD	-	TC1301BVJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVJE	-	TC1301BVJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVJF	-	TC1301BVJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVKA	-	TC1301BVKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVKB	-	TC1301BVKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVKC	-	TC1301BVKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVKD	-	TC1301BVKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVKE	-	TC1301BVKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVKF	-	TC1301BVKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVLA	-	TC1301BVLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVLB	-	TC1301BVLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVLC	-	TC1301BVLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVLD	-	TC1301BVLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVLE	-	TC1301BVLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVLF	-	TC1301BVLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVMA	-	TC1301BVMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVMB	-	TC1301BVMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BVMC	-	TC1301BVMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVMD	-	TC1301BVMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVME	-	TC1301BVMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVMF	-	TC1301BVMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVNA	-	TC1301BVNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVNB	-	TC1301BVNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVNC	-	TC1301BVNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVND	-	TC1301BVNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVNE	-	TC1301BVNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVNF	-	TC1301BVNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVOA	-	TC1301BVOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVOB	-	TC1301BVOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVOC	-	TC1301BVOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVOD	-	TC1301BVODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVOE	-	TC1301BVOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVOF	-	TC1301BVOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVPA	-	TC1301BVPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVPB	-	TC1301BVPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVPC	-	TC1301BVPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVPD	-	TC1301BVPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVPE	-	TC1301BVPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVPF	-	TC1301BVPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVQA	-	TC1301BVQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVQB	-	TC1301BVQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVQC	-	TC1301BVQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVQD	-	TC1301BVQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVQE	-	TC1301BVQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVQF	-	TC1301BVQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVRA	-	TC1301BVRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVRB	-	TC1301BVRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVRC	-	TC1301BVRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVRD	-	TC1301BVRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVRE	-	TC1301BVREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVRF	-	TC1301BVRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVSA	-	TC1301BVSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVSB	-	TC1301BVSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVSC	-	TC1301BVSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVSD	-	TC1301BVSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVSE	-	TC1301BVSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVSF	-	TC1301BVSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVTA	-	TC1301BVTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVTB	-	TC1301BVTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVTC	-	TC1301BVTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVTD	-	TC1301BVTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVTE	-	TC1301BVTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVTF	-	TC1301BVTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVUA	-	TC1301BVUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVUB	-	TC1301BVUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVUC	-	TC1301BVUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVUD	-	TC1301BVUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVUE	-	TC1301BVUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVUF	-	TC1301BVUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVVA	-	TC1301BVVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVVB	-	TC1301BVVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVVC	-	TC1301BVVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVVD	-	TC1301BVVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVVE	-	TC1301BVVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVVF	-	TC1301BVVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVWA	-	TC1301BVWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVWB	-	TC1301BVWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVWC	-	TC1301BVWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVWD	-	TC1301BVWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVWE	-	TC1301BVWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BVWF	-	TC1301BVWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWAA	-	TC1301BWAAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWAB	-	TC1301BWABVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWAC	-	TC1301BWACVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWAD	-	TC1301BWADVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWAE	-	TC1301BWAEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWAF	-	TC1301BWAFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BWBA	-	TC1301BWBAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWBB	-	TC1301BWBBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWBC	-	TC1301BWBCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWBD	-	TC1301BWBDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWBE	-	TC1301BWBEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWBF	-	TC1301BWBFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWCA	-	TC1301BWCAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWCB	-	TC1301BWCBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWCC	-	TC1301BWCCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWCD	-	TC1301BWCDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWCE	-	TC1301BWCEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWCF	-	TC1301BWCFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWDA	-	TC1301BWDAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWDB	-	TC1301BWDBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWDC	-	TC1301BWDCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWDD	-	TC1301BWDDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWDE	-	TC1301BWDEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWDF	-	TC1301BWDFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWEA	-	TC1301BWEAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWEB	-	TC1301BWEBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWEC	-	TC1301BWECVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWED	-	TC1301BWEDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWEE	-	TC1301BWEEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWEF	-	TC1301BWEFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWFA	-	TC1301BWFAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWFB	-	TC1301BWFBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWFC	-	TC1301BWFCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWFD	-	TC1301BWFDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWFE	-	TC1301BWFEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWFF	-	TC1301BWFFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWGA	-	TC1301BWGAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWGB	-	TC1301BWGBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWGC	-	TC1301BWGCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWGD	-	TC1301BWGDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWGE	-	TC1301BWGEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWGF	-	TC1301BWGFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWHA	-	TC1301BWHAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWHB	-	TC1301BWHBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWHC	-	TC1301BWHCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWHD	-	TC1301BWHDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWHE	-	TC1301BWHEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWHF	-	TC1301BWHFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWIA	-	TC1301BWIAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWIB	-	TC1301BWIBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWIC	-	TC1301BWICVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWID	-	TC1301BWIDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWIE	-	TC1301BWIEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWIF	-	TC1301BWIFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWJA	-	TC1301BWJAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWJB	-	TC1301BWJBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWJC	-	TC1301BWJCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWJD	-	TC1301BWJDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWJE	-	TC1301BWJEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWJF	-	TC1301BWJFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWKA	-	TC1301BWKAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWKB	-	TC1301BWKBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWKC	-	TC1301BWKCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWKD	-	TC1301BWKDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWKE	-	TC1301BWKEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWKF	-	TC1301BWKFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWLA	-	TC1301BWLAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWLB	-	TC1301BWLBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWLC	-	TC1301BWLCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWLD	-	TC1301BWLDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWLE	-	TC1301BWLEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWLF	-	TC1301BWLFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWMA	-	TC1301BWMAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWMB	-	TC1301BWMBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWMC	-	TC1301BWMCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWMD	-	TC1301BWMDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
31BWME	-	TC1301BWMEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWMF	-	TC1301BWMFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWNA	-	TC1301BWNAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWNB	-	TC1301BWNBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWNC	-	TC1301BWNCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWND	-	TC1301BWNDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWNE	-	TC1301BWNEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWNF	-	TC1301BWNFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWOA	-	TC1301BWOAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWOB	-	TC1301BWOBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWOC	-	TC1301BWOCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWOD	-	TC1301BWODVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWOE	-	TC1301BWOEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWOF	-	TC1301BWOFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWPA	-	TC1301BWPAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWPB	-	TC1301BWPBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWPC	-	TC1301BWPCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWPD	-	TC1301BWPDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWPE	-	TC1301BWPEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWPF	-	TC1301BWPFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWQA	-	TC1301BWQAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWQB	-	TC1301BWQBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWQC	-	TC1301BWQCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWQD	-	TC1301BWQDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWQE	-	TC1301BWQEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWQF	-	TC1301BWQFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWRA	-	TC1301BWRAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWRB	-	TC1301BWRBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWRC	-	TC1301BWRCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWRD	-	TC1301BWRDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWRE	-	TC1301BWREVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWRF	-	TC1301BWRFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWSA	-	TC1301BWSAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWSB	-	TC1301BWSBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWSC	-	TC1301BWSCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWSD	-	TC1301BWSDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWSE	-	TC1301BWSEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWSF	-	TC1301BWSFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWTA	-	TC1301BWTAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWTB	-	TC1301BWTBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWTC	-	TC1301BWTCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWTD	-	TC1301BWTDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWTE	-	TC1301BWTEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWTF	-	TC1301BWTFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWUA	-	TC1301BWUAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWUB	-	TC1301BWUBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWUC	-	TC1301BWUCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWUD	-	TC1301BWUDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWUE	-	TC1301BWUEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWUF	-	TC1301BWUFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWVA	-	TC1301BWVAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWVB	-	TC1301BWVBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWVC	-	TC1301BWVCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWVD	-	TC1301BWVDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWVE	-	TC1301BWVEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWVF	-	TC1301BWVFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWWA	-	TC1301BWWAVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWWB	-	TC1301BWWBVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWWC	-	TC1301BWWCVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWWD	-	TC1301BWWDVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWWE	-	TC1301BWWEVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31BWWF	-	TC1301BWWFVUA	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	MSOP-8	55u2	VR28	8k	Mcc
31P	-	TK11231BM	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
31Q	-	TK11331BM	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
31R	-	TK11331CM	LVR-IC	LDO, 3.1V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
31T	-	MMBZ5231BTW	Z-diode	Triple, 5.1V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOT-363	33dd	-	7c	Pjt
32	-	KIC7W32FK	CMOS-Log	Dual 2-input OR gates	US8	47	Log52	8c	Kec
32	-	MUN5332DW	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4k/4k7	SOT-363	33	TD2	7b	Mot
32	-	R1163D281E5	LVR-IC	LDO, 2.85V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
32	-	XC74WL32AASR	CMOS-Log	Dual 2-input OR gates	MSOP-8B	a6	Log52	8d	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3215G	-	LR33215BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3216G	-	LR33216BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3217G	-	LR33217BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3218G	-	LR33218BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3219G	-	LR33219BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3220G	-	LR33220BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3221G	-	LR33221BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3222G	-	LR33222BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3223G	-	LR33223BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3224G	-	LR33224BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3225G	-	LR33225BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3226G	-	LR33226BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3227G	-	LR33227BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3228G	-	LR33228BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3229G	-	LR33229BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3230G	-	LR33230BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3231G	-	LR33231BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3232G	-	LR33232BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3233G	-	LR33233BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
32A	-	TK74032L	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
32AAA	-	TC1302AAAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAB	-	TC1302AABVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAC	-	TC1302AACVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAD	-	TC1302AADVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAE	-	TC1302AAEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAF	-	TC1302AAFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAG	-	TC1302AAGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAH	-	TC1302AAHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAI	-	TC1302AAIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAJ	-	TC1302AAJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAK	-	TC1302AAKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAL	-	TC1302AALVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAM	-	TC1302AAMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAN	-	TC1302AANVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAO	-	TC1302AAOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAP	-	TC1302AAPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAQ	-	TC1302AAQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAR	-	TC1302AARVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAS	-	TC1302AASVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAT	-	TC1302AATVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAU	-	TC1302AAUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAV	-	TC1302AAVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AAW	-	TC1302AAWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABA	-	TC1302ABAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABB	-	TC1302ABBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABC	-	TC1302ABCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABD	-	TC1302ABDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABE	-	TC1302ABEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABF	-	TC1302ABFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABG	-	TC1302ABGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABH	-	TC1302ABHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABI	-	TC1302ABIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABJ	-	TC1302ABJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABK	-	TC1302ABKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABL	-	TC1302ABLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABM	-	TC1302ABMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABN	-	TC1302ABNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABO	-	TC1302ABOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABP	-	TC1302ABPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABQ	-	TC1302ABQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABR	-	TC1302ABRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABS	-	TC1302ABSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABT	-	TC1302ABTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABU	-	TC1302ABUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABV	-	TC1302ABVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ABW	-	TC1302ABWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACA	-	TC1302ACAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACB	-	TC1302ACBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACC	-	TC1302ACCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACD	-	TC1302ACDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
32ACE	-	TC1302ACEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACF	-	TC1302ACFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACG	-	TC1302ACGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACH	-	TC1302ACHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACI	-	TC1302ACIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACJ	-	TC1302ACJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACK	-	TC1302ACKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACL	-	TC1302ACLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACM	-	TC1302ACMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACN	-	TC1302ACNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACO	-	TC1302ACOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACP	-	TC1302ACPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACQ	-	TC1302ACQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACR	-	TC1302ACRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACS	-	TC1302ACSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACT	-	TC1302ACTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACU	-	TC1302ACUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACV	-	TC1302ACVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ACW	-	TC1302ACWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADA	-	TC1302ADAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADB	-	TC1302ADBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADC	-	TC1302ADCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADD	-	TC1302ADDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADE	-	TC1302ADEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADF	-	TC1302ADFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADG	-	TC1302ADGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADH	-	TC1302ADHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADI	-	TC1302ADIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADJ	-	TC1302ADJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADK	-	TC1302ADKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADL	-	TC1302ADLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADM	-	TC1302ADMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADN	-	TC1302ADNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADO	-	TC1302ADOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADP	-	TC1302ADPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADQ	-	TC1302ADQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADR	-	TC1302ADRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADS	-	TC1302ADSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADT	-	TC1302ADTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADU	-	TC1302ADUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADV	-	TC1302ADVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ADW	-	TC1302ADWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEA	-	TC1302AEAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEB	-	TC1302AEBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEC	-	TC1302AECVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AED	-	TC1302AEDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEE	-	TC1302AEEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEF	-	TC1302AEFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEG	-	TC1302AEGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEH	-	TC1302AEHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEI	-	TC1302AEIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEJ	-	TC1302AEJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEK	-	TC1302AEKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEL	-	TC1302AELVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEM	-	TC1302AEMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEN	-	TC1302AENVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEO	-	TC1302AEOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEP	-	TC1302AEPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEQ	-	TC1302AEQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AER	-	TC1302AERVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AES	-	TC1302AESVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AET	-	TC1302AETVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEU	-	TC1302AEUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEV	-	TC1302AEVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AEW	-	TC1302AEWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFA	-	TC1302AFAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFB	-	TC1302AFBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFC	-	TC1302AFCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFD	-	TC1302AFDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFE	-	TC1302AFEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
32AFF	-	TC1302AFFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFG	-	TC1302AFGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFH	-	TC1302AFHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFI	-	TC1302AFIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFJ	-	TC1302AFJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFK	-	TC1302AFKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFL	-	TC1302AFLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFM	-	TC1302AFMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFN	-	TC1302AFNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFO	-	TC1302AFOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFP	-	TC1302AFPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFQ	-	TC1302AFQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFR	-	TC1302AFRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFS	-	TC1302AFSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFT	-	TC1302AFTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFU	-	TC1302AFUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFV	-	TC1302AFVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AFW	-	TC1302AFWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGA	-	TC1302AGAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGB	-	TC1302AGBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGC	-	TC1302AGCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGD	-	TC1302AGDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGE	-	TC1302AGEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGF	-	TC1302AGFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGG	-	TC1302AGGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGH	-	TC1302AGHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGI	-	TC1302AGIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGJ	-	TC1302AGJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGK	-	TC1302AGKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGL	-	TC1302AGLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGM	-	TC1302AGMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGN	-	TC1302AGNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGO	-	TC1302AGOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGP	-	TC1302AGPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGQ	-	TC1302AGQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGR	-	TC1302AGRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGS	-	TC1302AGSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGT	-	TC1302AGTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGU	-	TC1302AGUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGV	-	TC1302AGVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AGW	-	TC1302AGWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHA	-	TC1302AHAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHB	-	TC1302AHBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHC	-	TC1302AHCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHD	-	TC1302AHDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHE	-	TC1302AHEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHF	-	TC1302AHFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHG	-	TC1302AHGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHH	-	TC1302AHHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHI	-	TC1302AHIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHJ	-	TC1302AHJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHK	-	TC1302AHKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHL	-	TC1302AHLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHM	-	TC1302AHMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHN	-	TC1302AHNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHO	-	TC1302AHOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHP	-	TC1302AHPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHQ	-	TC1302AHQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHR	-	TC1302AHRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHS	-	TC1302AHSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHT	-	TC1302AHTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHU	-	TC1302AHUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHV	-	TC1302AHVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AHW	-	TC1302AHWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIA	-	TC1302AIAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIB	-	TC1302AIBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIC	-	TC1302AICVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AID	-	TC1302AIDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIE	-	TC1302AIEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIF	-	TC1302AIFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
32AIG	-	TC1302AIGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIH	-	TC1302AIHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AII	-	TC1302AIIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIJ	-	TC1302AIJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIK	-	TC1302AIKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIL	-	TC1302AILVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIM	-	TC1302AIMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIN	-	TC1302AINVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIO	-	TC1302AIOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIP	-	TC1302AIPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIQ	-	TC1302AIQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIR	-	TC1302AIRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIS	-	TC1302AISVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIT	-	TC1302AITVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIU	-	TC1302AIUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIV	-	TC1302AIVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AIW	-	TC1302AIWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJA	-	TC1302AJAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJB	-	TC1302AJBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJC	-	TC1302AJCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJD	-	TC1302AJDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJE	-	TC1302AJEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJF	-	TC1302AJFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJG	-	TC1302AJGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJH	-	TC1302AJHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJI	-	TC1302AJIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJJ	-	TC1302AJJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJK	-	TC1302AJKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJL	-	TC1302AJLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJM	-	TC1302AJMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJN	-	TC1302AJNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJO	-	TC1302AJOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJP	-	TC1302AJPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJQ	-	TC1302AJQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJR	-	TC1302AJRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJS	-	TC1302AJSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJT	-	TC1302AJTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJU	-	TC1302AJUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJV	-	TC1302AJVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AJW	-	TC1302AJWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKA	-	TC1302AKAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKB	-	TC1302AKBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKC	-	TC1302AKCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKD	-	TC1302AKDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKE	-	TC1302AKEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKF	-	TC1302AKFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKG	-	TC1302AKGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKH	-	TC1302AKHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKI	-	TC1302AKIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKJ	-	TC1302AKJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKK	-	TC1302AKKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKL	-	TC1302AKLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKM	-	TC1302AKMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKN	-	TC1302AKNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKO	-	TC1302AKOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKP	-	TC1302AKPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKQ	-	TC1302AKQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKR	-	TC1302AKRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKS	-	TC1302AKSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKT	-	TC1302AKTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKU	-	TC1302AKUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKV	-	TC1302AKVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AKW	-	TC1302AKWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALA	-	TC1302ALAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALB	-	TC1302ALBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALC	-	TC1302ALCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALD	-	TC1302ALDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALE	-	TC1302ALEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALF	-	TC1302ALFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALG	-	TC1302ALGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
32ALH	-	TC1302ALHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALI	-	TC1302ALIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALJ	-	TC1302ALJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALK	-	TC1302ALKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALL	-	TC1302ALLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALM	-	TC1302ALMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALN	-	TC1302ALNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALO	-	TC1302ALOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALP	-	TC1302ALPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALQ	-	TC1302ALQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALR	-	TC1302ALRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALS	-	TC1302ALSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALT	-	TC1302ALTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALU	-	TC1302ALUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALV	-	TC1302ALVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ALW	-	TC1302ALWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMA	-	TC1302AMAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMB	-	TC1302AMBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMC	-	TC1302AMCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMD	-	TC1302AMDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AME	-	TC1302AMEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMF	-	TC1302AMFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMG	-	TC1302AMGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMH	-	TC1302AMHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMI	-	TC1302AMIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMJ	-	TC1302AMJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMK	-	TC1302AMKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AML	-	TC1302AMLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMM	-	TC1302AMMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMN	-	TC1302AMNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMO	-	TC1302AMOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMP	-	TC1302AMPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMQ	-	TC1302AMQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMR	-	TC1302AMRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMS	-	TC1302AMSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMT	-	TC1302AMTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMU	-	TC1302AMUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMV	-	TC1302AMVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AMW	-	TC1302AMWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANA	-	TC1302ANAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANB	-	TC1302ANBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANC	-	TC1302ANCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AND	-	TC1302ANDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANE	-	TC1302ANEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANF	-	TC1302ANFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANG	-	TC1302ANGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANH	-	TC1302ANHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANI	-	TC1302ANIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANJ	-	TC1302ANJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANK	-	TC1302ANKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANL	-	TC1302ANLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANM	-	TC1302ANMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANN	-	TC1302ANNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANO	-	TC1302ANOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANP	-	TC1302ANPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANQ	-	TC1302ANQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANR	-	TC1302ANRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANS	-	TC1302ANSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANT	-	TC1302ANTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANU	-	TC1302ANUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANV	-	TC1302ANVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ANW	-	TC1302ANWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOA	-	TC1302AOAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOB	-	TC1302AOBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOC	-	TC1302AOCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOD	-	TC1302AODVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOE	-	TC1302AOEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOF	-	TC1302AOFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOG	-	TC1302AOGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOH	-	TC1302AOHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
32AOI	-	TC1302AOIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOJ	-	TC1302AOJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOK	-	TC1302AOKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOL	-	TC1302AOLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOM	-	TC1302AOMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AON	-	TC1302AONVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOO	-	TC1302AOOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOP	-	TC1302AOPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOQ	-	TC1302AOQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOR	-	TC1302AORVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOS	-	TC1302AOSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOT	-	TC1302AOTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOU	-	TC1302AOUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOV	-	TC1302AOVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AOW	-	TC1302AOWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APA	-	TC1302APAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APB	-	TC1302APBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APC	-	TC1302APCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APD	-	TC1302APDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APE	-	TC1302APEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APF	-	TC1302APFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APG	-	TC1302APGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APH	-	TC1302APHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32API	-	TC1302APIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APJ	-	TC1302APJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APK	-	TC1302APKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APL	-	TC1302APLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APM	-	TC1302APMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APN	-	TC1302APNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APO	-	TC1302APOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APP	-	TC1302APPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APQ	-	TC1302APQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APR	-	TC1302APRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APS	-	TC1302APSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APT	-	TC1302APTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APU	-	TC1302APUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APV	-	TC1302APVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32APW	-	TC1302APWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQA	-	TC1302AQAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQB	-	TC1302AQBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQC	-	TC1302AQCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQD	-	TC1302AQDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQE	-	TC1302AQEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQF	-	TC1302AQFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQG	-	TC1302AQGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQH	-	TC1302AQHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQI	-	TC1302AQIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQJ	-	TC1302AQJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQK	-	TC1302AQKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQL	-	TC1302AQLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQM	-	TC1302AQMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQN	-	TC1302AQNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQO	-	TC1302AQOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQP	-	TC1302AQPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQQ	-	TC1302AQQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQR	-	TC1302AQRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQS	-	TC1302AQSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQT	-	TC1302AQTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQU	-	TC1302AQUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQV	-	TC1302AQVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AQW	-	TC1302AQWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARA	-	TC1302ARAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARB	-	TC1302ARBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARC	-	TC1302ARCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARD	-	TC1302ARDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARE	-	TC1302AREVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARF	-	TC1302ARFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARG	-	TC1302ARGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARH	-	TC1302ARHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARI	-	TC1302ARIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
32ARJ	-	TC1302ARJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARK	-	TC1302ARKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARL	-	TC1302ARLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARM	-	TC1302ARMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARN	-	TC1302ARNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARO	-	TC1302AROVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARP	-	TC1302ARPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARQ	-	TC1302ARQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARR	-	TC1302ARRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARS	-	TC1302ARSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ART	-	TC1302ARTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARU	-	TC1302ARUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARV	-	TC1302ARVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ARW	-	TC1302ARWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASA	-	TC1302ASAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASB	-	TC1302ASBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASC	-	TC1302ASCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASD	-	TC1302ASDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASE	-	TC1302ASEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASF	-	TC1302ASFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASG	-	TC1302ASGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASH	-	TC1302ASHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASI	-	TC1302ASIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASJ	-	TC1302ASJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASK	-	TC1302ASKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASL	-	TC1302ASLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASM	-	TC1302ASMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASN	-	TC1302ASNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASO	-	TC1302ASOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASP	-	TC1302ASPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASQ	-	TC1302ASQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASR	-	TC1302ASRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASS	-	TC1302ASSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AST	-	TC1302ASTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASU	-	TC1302ASUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASV	-	TC1302ASVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ASW	-	TC1302ASWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATA	-	TC1302ATAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATB	-	TC1302ATBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATC	-	TC1302ATCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATD	-	TC1302ATDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATE	-	TC1302ATEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATF	-	TC1302ATFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATG	-	TC1302ATGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATH	-	TC1302ATHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATI	-	TC1302ATIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATJ	-	TC1302ATJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATK	-	TC1302ATKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATL	-	TC1302ATLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATM	-	TC1302ATMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATN	-	TC1302ATNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATO	-	TC1302ATOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATP	-	TC1302ATPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATQ	-	TC1302ATQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATR	-	TC1302ATRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATS	-	TC1302ATSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATT	-	TC1302ATTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATU	-	TC1302ATUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATV	-	TC1302ATVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32ATW	-	TC1302ATWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUA	-	TC1302AUAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUB	-	TC1302AUBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUC	-	TC1302AUCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUD	-	TC1302AUDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUE	-	TC1302AUEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUF	-	TC1302AUFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUG	-	TC1302AUGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUH	-	TC1302AUHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUI	-	TC1302AUIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUJ	-	TC1302AUJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
32AUK	-	TC1302AUKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUL	-	TC1302AULVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUM	-	TC1302AUMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUN	-	TC1302AUNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUO	-	TC1302AUOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUP	-	TC1302AUPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUQ	-	TC1302AUQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUR	-	TC1302AURVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUS	-	TC1302AUSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUT	-	TC1302AUTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUU	-	TC1302AUUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUV	-	TC1302AUVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AUW	-	TC1302AUWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVA	-	TC1302AVAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVB	-	TC1302AVBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVC	-	TC1302AVCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVD	-	TC1302AVDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVE	-	TC1302AVEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVF	-	TC1302AVFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVG	-	TC1302AVGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVH	-	TC1302AVHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVI	-	TC1302AVIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVJ	-	TC1302AVJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVK	-	TC1302AVKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVL	-	TC1302AVLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVM	-	TC1302AVMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVN	-	TC1302AVNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVO	-	TC1302AVOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVP	-	TC1302AVPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVQ	-	TC1302AVQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVR	-	TC1302AVRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVS	-	TC1302AVSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVT	-	TC1302AVTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVU	-	TC1302AVUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVV	-	TC1302AVVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AVW	-	TC1302AVWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWA	-	TC1302AWAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWB	-	TC1302AWBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWC	-	TC1302AWCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWD	-	TC1302AWDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWE	-	TC1302AWEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWF	-	TC1302AWFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWG	-	TC1302AWGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWH	-	TC1302AWHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWI	-	TC1302AWIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWJ	-	TC1302AWJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWK	-	TC1302AWKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWL	-	TC1302AWLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWM	-	TC1302AWMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWN	-	TC1302AWNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWO	-	TC1302AWOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWP	-	TC1302AWPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWQ	-	TC1302AWQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWR	-	TC1302AWRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWS	-	TC1302AWSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWT	-	TC1302AWTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWU	-	TC1302AWUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWV	-	TC1302AWVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32AWW	-	TC1302AWWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u3	VR30	8k	Mcc
32BAA	-	TC1302BAAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAB	-	TC1302BABVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAC	-	TC1302BACVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAD	-	TC1302BADVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAE	-	TC1302BAEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAF	-	TC1302BAFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAG	-	TC1302BAGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAH	-	TC1302BAHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAI	-	TC1302BAIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAJ	-	TC1302BAJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAK	-	TC1302BAKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
32BAL	-	TC1302BALVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAM	-	TC1302BAMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAN	-	TC1302BANVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAO	-	TC1302BAOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAP	-	TC1302BAPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAQ	-	TC1302BAQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAR	-	TC1302BARVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAS	-	TC1302BASVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAT	-	TC1302BATVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAU	-	TC1302BAUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAV	-	TC1302BAVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BAW	-	TC1302BAWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBA	-	TC1302BBAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBB	-	TC1302BBBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBC	-	TC1302BBCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBD	-	TC1302BBDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBE	-	TC1302BBEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBF	-	TC1302BBFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBG	-	TC1302BBGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBH	-	TC1302BBHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBI	-	TC1302BBIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBJ	-	TC1302BBJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBK	-	TC1302BBKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBL	-	TC1302BBLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBM	-	TC1302BBMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBN	-	TC1302BBNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBO	-	TC1302BBOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBP	-	TC1302BBPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBQ	-	TC1302BBQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBR	-	TC1302BBRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBS	-	TC1302BBSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBT	-	TC1302BBTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBU	-	TC1302BBUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBV	-	TC1302BBVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BBW	-	TC1302BBWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCA	-	TC1302BCAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCB	-	TC1302BCBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCC	-	TC1302BCCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCD	-	TC1302BCDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCE	-	TC1302BCEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCF	-	TC1302BCFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCG	-	TC1302BCGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCH	-	TC1302BCHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCI	-	TC1302BCIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCJ	-	TC1302BCJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCK	-	TC1302BCKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCL	-	TC1302BCLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCM	-	TC1302BCMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCN	-	TC1302BCNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCO	-	TC1302BCOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCP	-	TC1302BCPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCQ	-	TC1302BCQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCR	-	TC1302BCRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCS	-	TC1302BCSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCT	-	TC1302BCTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCU	-	TC1302BCUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCV	-	TC1302BCVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BCW	-	TC1302BCWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDA	-	TC1302BDAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDB	-	TC1302BDBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDC	-	TC1302BDCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDD	-	TC1302BDDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDE	-	TC1302BDEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDF	-	TC1302BDFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDG	-	TC1302BDGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDH	-	TC1302BDHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDI	-	TC1302BDIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDJ	-	TC1302BDJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDK	-	TC1302BDKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDL	-	TC1302BDLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
32BDM	-	TC1302BDMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDN	-	TC1302BDNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDO	-	TC1302BDOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDP	-	TC1302BDPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDQ	-	TC1302BDQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDR	-	TC1302BDRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDS	-	TC1302BDSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDT	-	TC1302BDTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDU	-	TC1302BDUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDV	-	TC1302BDVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BDW	-	TC1302BDWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEA	-	TC1302BEAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEB	-	TC1302BEBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEC	-	TC1302BECVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BED	-	TC1302BEDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEE	-	TC1302BEEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEF	-	TC1302BEFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEG	-	TC1302BEGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEH	-	TC1302BEHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEI	-	TC1302BEIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEJ	-	TC1302BEJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEK	-	TC1302BEKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEL	-	TC1302BELVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEM	-	TC1302BEMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEN	-	TC1302BENVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEO	-	TC1302BEOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEP	-	TC1302BEPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEQ	-	TC1302BEQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BER	-	TC1302BERVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BES	-	TC1302BESVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BET	-	TC1302BETVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEU	-	TC1302BEUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEV	-	TC1302BEVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BEW	-	TC1302BEWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFA	-	TC1302BFAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFB	-	TC1302BFBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFC	-	TC1302BFCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFD	-	TC1302BFDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFE	-	TC1302BFEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFF	-	TC1302BFFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFG	-	TC1302BFGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFH	-	TC1302BFHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFI	-	TC1302BFIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFJ	-	TC1302BFJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFK	-	TC1302BFKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFL	-	TC1302BFLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFM	-	TC1302BFMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFN	-	TC1302BFNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFO	-	TC1302BFOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFP	-	TC1302BFPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFQ	-	TC1302BFQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFR	-	TC1302BFRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFS	-	TC1302BFSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFT	-	TC1302BFTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFU	-	TC1302BFUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFV	-	TC1302BFVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BFW	-	TC1302BFWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGA	-	TC1302BGAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGB	-	TC1302BGBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGC	-	TC1302BGCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGD	-	TC1302BGDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGE	-	TC1302BGEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGF	-	TC1302BGFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGG	-	TC1302BGGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGH	-	TC1302BGHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGI	-	TC1302BGIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGJ	-	TC1302BGJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGK	-	TC1302BGKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGL	-	TC1302BGLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGM	-	TC1302BGMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
32BGN	-	TC1302BGNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGO	-	TC1302BGOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGP	-	TC1302BGPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGQ	-	TC1302BGQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGR	-	TC1302BGRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGS	-	TC1302BGSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGT	-	TC1302BGTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGU	-	TC1302BGUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGV	-	TC1302BGVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BGW	-	TC1302BGWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHA	-	TC1302BHAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHB	-	TC1302BHBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHC	-	TC1302BHCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHD	-	TC1302BHDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHE	-	TC1302BHEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHF	-	TC1302BHFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHG	-	TC1302BHGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHH	-	TC1302BHHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHI	-	TC1302BHIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHJ	-	TC1302BHJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHK	-	TC1302BHKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHL	-	TC1302BHLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHM	-	TC1302BHMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHN	-	TC1302BHNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHO	-	TC1302BHOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHP	-	TC1302BHPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHQ	-	TC1302BHQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHR	-	TC1302BHRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHS	-	TC1302BHSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHT	-	TC1302BHTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHU	-	TC1302BHUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHV	-	TC1302BHVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BHW	-	TC1302BHWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIA	-	TC1302BIAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIB	-	TC1302BIBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIC	-	TC1302BICVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BID	-	TC1302BIDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIE	-	TC1302BIEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIF	-	TC1302BIFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIG	-	TC1302BIGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIH	-	TC1302BIHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BII	-	TC1302BIIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIJ	-	TC1302BIJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIK	-	TC1302BIKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIL	-	TC1302BILVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIM	-	TC1302BIMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIN	-	TC1302BINVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIO	-	TC1302BIOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIP	-	TC1302BIPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIQ	-	TC1302BIQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIR	-	TC1302BIRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIS	-	TC1302BISVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIT	-	TC1302BITVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIU	-	TC1302BIUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIV	-	TC1302BIVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BIW	-	TC1302BIWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJA	-	TC1302BJAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJB	-	TC1302BJBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJC	-	TC1302BJCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJD	-	TC1302BJDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJE	-	TC1302BJEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJF	-	TC1302BJFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJG	-	TC1302BJGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJH	-	TC1302BJHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJI	-	TC1302BJIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJJ	-	TC1302BJJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJK	-	TC1302BJKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJL	-	TC1302BJLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJM	-	TC1302BJMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJN	-	TC1302BJNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
32BJO	-	TC1302BJOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJP	-	TC1302BJPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJQ	-	TC1302BJQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJR	-	TC1302BJRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJS	-	TC1302BJSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJT	-	TC1302BJTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJU	-	TC1302BJUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJV	-	TC1302BJVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BJW	-	TC1302BJWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKA	-	TC1302BKAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKB	-	TC1302BKBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKC	-	TC1302BKCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKD	-	TC1302BKDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKE	-	TC1302BKEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKF	-	TC1302BKFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKG	-	TC1302BKGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKH	-	TC1302BKHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKI	-	TC1302BKIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKJ	-	TC1302BKJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKK	-	TC1302BKKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKL	-	TC1302BKLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKM	-	TC1302BKMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKN	-	TC1302BKNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKO	-	TC1302BKOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKP	-	TC1302BKPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKQ	-	TC1302BKQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKR	-	TC1302BKRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKS	-	TC1302BKSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKT	-	TC1302BKTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKU	-	TC1302BKUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKV	-	TC1302BKVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BKW	-	TC1302BKWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLA	-	TC1302BLAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLB	-	TC1302BLBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLC	-	TC1302BLCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLD	-	TC1302BLDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLE	-	TC1302BLEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLF	-	TC1302BLFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLG	-	TC1302BLGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLH	-	TC1302BLHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLI	-	TC1302BLIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLJ	-	TC1302BLJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLK	-	TC1302BLKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLL	-	TC1302BLLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLM	-	TC1302BLMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLN	-	TC1302BLNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLO	-	TC1302BLOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLP	-	TC1302BLPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLQ	-	TC1302BLQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLR	-	TC1302BLRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLS	-	TC1302BLSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLT	-	TC1302BLTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLU	-	TC1302BLUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLV	-	TC1302BLVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BLW	-	TC1302BLWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMA	-	TC1302BMAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMB	-	TC1302BMBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMC	-	TC1302BMCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMD	-	TC1302BMDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BME	-	TC1302BMEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMF	-	TC1302BMFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMG	-	TC1302BMGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMH	-	TC1302BMHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMI	-	TC1302BMIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMJ	-	TC1302BMJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMK	-	TC1302BMKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BML	-	TC1302BMLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMM	-	TC1302BMMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMN	-	TC1302BMNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMO	-	TC1302BMOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
32BMP	-	TC1302BMPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMQ	-	TC1302BMQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMR	-	TC1302BMRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMS	-	TC1302BMSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMT	-	TC1302BMTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMU	-	TC1302BMUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMV	-	TC1302BMVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BMW	-	TC1302BMWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNA	-	TC1302BNAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNB	-	TC1302BNBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNC	-	TC1302BNCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BND	-	TC1302BNDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNE	-	TC1302BNEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNF	-	TC1302BNFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNG	-	TC1302BNGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNH	-	TC1302BNHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNI	-	TC1302BNIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNJ	-	TC1302BNJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNK	-	TC1302BNKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNL	-	TC1302BNLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNM	-	TC1302BNMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNN	-	TC1302BNNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNO	-	TC1302BNOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNP	-	TC1302BNPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNQ	-	TC1302BNQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNR	-	TC1302BNRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNS	-	TC1302BNSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNT	-	TC1302BNTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNU	-	TC1302BNUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNV	-	TC1302BNVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BNW	-	TC1302BNWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOA	-	TC1302BOAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOB	-	TC1302BOBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOC	-	TC1302BOCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOD	-	TC1302BODVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOE	-	TC1302BOEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOF	-	TC1302BOFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOG	-	TC1302BOGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOH	-	TC1302BOHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOI	-	TC1302BOIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOJ	-	TC1302BOJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOK	-	TC1302BOKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOL	-	TC1302BOLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOM	-	TC1302BOMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BON	-	TC1302BONVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOO	-	TC1302BOOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOP	-	TC1302BOPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOQ	-	TC1302BOQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOR	-	TC1302BORVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOS	-	TC1302BOSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOT	-	TC1302BOTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOU	-	TC1302BOUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOV	-	TC1302BOVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BOW	-	TC1302BOWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPA	-	TC1302BPAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPB	-	TC1302BPBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPC	-	TC1302BPCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPD	-	TC1302BPDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPE	-	TC1302BPEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPF	-	TC1302BPFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPG	-	TC1302BPGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPH	-	TC1302BPHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPI	-	TC1302BPIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPJ	-	TC1302BPJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPK	-	TC1302BPKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPL	-	TC1302BPLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPM	-	TC1302BPMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPN	-	TC1302BPNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPO	-	TC1302BPOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPP	-	TC1302BPPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
32BPQ	-	TC1302BPQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPR	-	TC1302BPRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPS	-	TC1302BPSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPT	-	TC1302BPTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPU	-	TC1302BPUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPV	-	TC1302BPVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BPW	-	TC1302BPWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQA	-	TC1302BQAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQB	-	TC1302BQBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQC	-	TC1302BQCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQD	-	TC1302BQDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQE	-	TC1302BQEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQF	-	TC1302BQFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQG	-	TC1302BQGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQH	-	TC1302BQHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQI	-	TC1302BQIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQJ	-	TC1302BQJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQK	-	TC1302BQKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQL	-	TC1302BQLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQM	-	TC1302BQMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQN	-	TC1302BQNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQO	-	TC1302BQOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQP	-	TC1302BQPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQQ	-	TC1302BQQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQR	-	TC1302BQRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQS	-	TC1302BQSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQT	-	TC1302BQTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQU	-	TC1302BQUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQV	-	TC1302BQVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BQW	-	TC1302BQWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRA	-	TC1302BRAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRB	-	TC1302BRBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRC	-	TC1302BRCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRD	-	TC1302BRDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRE	-	TC1302BREVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRF	-	TC1302BRFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRG	-	TC1302BRGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRH	-	TC1302BRHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRI	-	TC1302BRIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRJ	-	TC1302BRJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRK	-	TC1302BRKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRL	-	TC1302BRLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRM	-	TC1302BRMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRN	-	TC1302BRNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRO	-	TC1302BROVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRP	-	TC1302BRPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRQ	-	TC1302BRQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRR	-	TC1302BRRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRS	-	TC1302BRSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRT	-	TC1302BRTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRU	-	TC1302BRUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRV	-	TC1302BRVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BRW	-	TC1302BRWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSA	-	TC1302BSAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSB	-	TC1302BSBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSC	-	TC1302BSCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSD	-	TC1302BSDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSE	-	TC1302BSEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSF	-	TC1302BSFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSG	-	TC1302BSGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSH	-	TC1302BSHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSI	-	TC1302BSIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSJ	-	TC1302BSJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSK	-	TC1302BSKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSL	-	TC1302BSLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSM	-	TC1302BSMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSN	-	TC1302BSNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSO	-	TC1302BSOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSP	-	TC1302BSPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSQ	-	TC1302BSQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
32BSR	-	TC1302BSRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSS	-	TC1302BSSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BST	-	TC1302BSTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSU	-	TC1302BSUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSV	-	TC1302BSVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BSW	-	TC1302BSWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTA	-	TC1302BTAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTB	-	TC1302BTBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTC	-	TC1302BTCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTD	-	TC1302BTDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTE	-	TC1302BTEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTF	-	TC1302BTFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTG	-	TC1302BTGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTH	-	TC1302BTHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTI	-	TC1302BTIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTJ	-	TC1302BTJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTK	-	TC1302BTKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTL	-	TC1302BTLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTM	-	TC1302BTMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTN	-	TC1302BTNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTO	-	TC1302BTOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTP	-	TC1302BTPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTQ	-	TC1302BTQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTR	-	TC1302BTRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTS	-	TC1302BTSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTT	-	TC1302BTTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTU	-	TC1302BTUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTV	-	TC1302BTVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BTW	-	TC1302BTWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUA	-	TC1302BUAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUB	-	TC1302BUBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUC	-	TC1302BUCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUD	-	TC1302BUDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUE	-	TC1302BUEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUF	-	TC1302BUFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUG	-	TC1302BUGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUH	-	TC1302BUHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUI	-	TC1302BUIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUJ	-	TC1302BUJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUK	-	TC1302BUKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUL	-	TC1302BULVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUM	-	TC1302BUMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUN	-	TC1302BUNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUO	-	TC1302BUOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUP	-	TC1302BUPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUQ	-	TC1302BUQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUR	-	TC1302BURVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUS	-	TC1302BUSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUT	-	TC1302BUTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUU	-	TC1302BUUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUV	-	TC1302BUVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BUW	-	TC1302BUWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVA	-	TC1302BVAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVB	-	TC1302BVBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVC	-	TC1302BVCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVD	-	TC1302BVDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVE	-	TC1302BVEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVF	-	TC1302BVFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVG	-	TC1302BVGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVH	-	TC1302BVHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVI	-	TC1302BVIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVJ	-	TC1302BVJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVK	-	TC1302BVKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVL	-	TC1302BVLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVM	-	TC1302BVMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVN	-	TC1302BVNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVO	-	TC1302BVOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVP	-	TC1302BVPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVQ	-	TC1302BVQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVR	-	TC1302BVRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
32BVS	-	TC1302BVSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVT	-	TC1302BVTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVU	-	TC1302BVUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVV	-	TC1302BVVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BVW	-	TC1302BVWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWA	-	TC1302BWAVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWB	-	TC1302BWBVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWC	-	TC1302BWCVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWD	-	TC1302BWDVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWE	-	TC1302BWEVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWF	-	TC1302BWFVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWG	-	TC1302BWGVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWH	-	TC1302BWHVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWI	-	TC1302BWIVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWJ	-	TC1302BWJVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWK	-	TC1302BWKVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWL	-	TC1302BWLVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWM	-	TC1302BWMVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWN	-	TC1302BWNVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWO	-	TC1302BWOVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWP	-	TC1302BWPVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWQ	-	TC1302BWQVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWR	-	TC1302BWRVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWS	-	TC1302BWSVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWT	-	TC1302BWTVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWU	-	TC1302BWUVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWV	-	TC1302BWVVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32BWW	-	TC1302BWWVUA	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, +CE	MSOP-8	55u4	VR29	8k	Mcc
32P	-	TK11232BM	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
32Q	-	TK11332BM	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
32R	-	TK11332CM	LVR-IC	LDO, 3.2V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
32T	-	MMBZ5232BTW	Z-diode	Triple, 5.6V±5%, Izt=20mA, Zzt=11Ω, 200mW	SOT-363	33dd	-	7c	Pjt
33	-	MUN5333DW	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4k7/47k	SOT-363	33	TD2	7b	Mot
3315G	-	LR33315BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3316G	-	LR33316BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3317G	-	LR33317BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3318G	-	LR33318BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3319G	-	LR33319BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3320G	-	LR33320BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3321G	-	LR33321BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3322G	-	LR33322BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3323G	-	LR33323BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3324G	-	LR33324BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3325G	-	LR33325BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3326G	-	LR33326BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3327G	-	LR33327BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3328G	-	LR33328BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3329G	-	LR33329BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3330G	-	LR33330BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3331G	-	LR33331BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3332G	-	LR33332BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
3333G	-	LR33333BG-AG6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±0.5%, 150mA, +CE	SOP-6	33x5	VR19	7b	Utc
33A	-	MMQA33V	TVS	Quad, Vrwm=33V, 24W(1ms)	SC-74	33	D14	7b	Ons
33A	-	TK74033L	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
33P	-	TK11233BM	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
33Q	-	TK11333BM	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
33R	-	TK11333CM	LVR-IC	LDO, 3.3V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
33T	-	MMBZ5233BTW	Z-diode	Triple, 6.0V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOT-363	33dd	-	7c	Pjt
34	-	MUN5334DW	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	SOT-363	33	TD2	7b	Mot
34119	-	SGSC34119	Lin-IC	AF PA, 2..16V, 250mW(5V/32Ω), shutdown	SOP-8	47	AFP37	8d	Sec
34A	-	TK74034L	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
34P	-	TK11234BM	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
34Q	-	TK11334BM	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
34R	-	µPA812T-FB	Si-npn	Dual, VHF/UHF, 20V, 30mA, 120mW, 5.5GHz, B=40..80	SOT-363	33	T1	7b	Nec
34T	-	MMBZ5234BTW	Z-diode	Triple, 6.2V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOT-363	33dd	-	7c	Pjt
35	-	MUN5335DW	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	SOT-363	33	TD2	7b	Mot
3541	-	BH3541F	Lin-IC	AF PA, 2.8..6.5V, 2x62mW(5V/16Ω), mute	SOP-8	47	AFP2	8a	Rhm
3544	-	BH3544F	Lin-IC	AF PA, 2.8..6.5V, 2x62mW(5V/16Ω), mute	SOP-8	47	AFP2	8a	Rhm
3547	-	BH3547F	Lin-IC	AF PA, 4.5..6.5V, 2x77mW(5V/16Ω), mute	SOP-8	47	AFP2	8a	Rhm
3548	-	BH3548F	Lin-IC	AF PA, 4..5.5V, 2x62mW(5V/16Ω), mute	SOP-8	47	AFP2	8a	Rhm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
35A	-	TK74035L	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
35P	-	TK11235BM	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
35Q	-	TK11335BM	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
35R	-	µPA812T-GB	Si-npn	Dual, VHF/UHF, 20V, 30mA, 120mW, 5.5GHz, B=70..140	SOT-363	33	T1	7b	Nec
35R	-	TK11335CM	LVR-IC	LDO, 3.5V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
35T	-	MMBZ5235BTW	Z-diode	Triple, 6.8V±5%, Izt=20mA, Zzt=5Ω, 200mW	SOT-363	33dd	-	7c	Pjt
36A	-	TK74036L	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
36P	-	TK11236BM	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
36Q	-	TK11336BM	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
36T	-	MMBZ5236BTW	Z-diode	Triple, 7.5V±5%, Izt=20mA, Zzt=6Ω, 200mW	SOT-363	33dd	-	7c	Pjt
37	-	µPA835TC	Si-npn	Dual, VHF/UHF, 9(20)V, 30(100)mA, B=75..150, 12GHz	SMM-6	35	T3	7b	Nec
37A	-	TK74037L	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
37P	-	TK11237BM	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
37Q	-	TK11337BM	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
37T	-	MMBZ5237BTW	Z-diode	Triple, 8.2V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOT-363	33dd	-	7c	Pjt
38A	-	TK74038L	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
38P	-	TK11238BM	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
38Q	-	TK11338BM	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
38R	-	TK11338CM	LVR-IC	LDO, 3.8V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
38T	-	MMBZ5238BTW	Z-diode	Triple, 8.7V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOT-363	33dd	-	7c	Pjt
39A	-	TK74039L	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.9V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
39P	-	TK11239BM	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
39Q	-	TK11339BM	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
39T	-	MMBZ5239BTW	Z-diode	Triple, 9.1V±5%, Izt=20mA, Zzt=10Ω, 200mW	SOT-363	33dd	-	7c	Pjt
3B	-	BC856BDW	Si-pnp	Dual, GP, 80V, 100mA, 250mW, B=220..475, >100MHz	SOT-363	33	T10	7c	Ons
3B	-	R1161D131A	LVR-IC	LDO, 1.3V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
3B253	-	XC9802B253KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 2.5V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B263	-	XC9802B263KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 2.6V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B273	-	XC9802B273KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 2.7V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B283	-	XC9802B283KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 2.8V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B293	-	XC9802B293KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 2.9V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B303	-	XC9802B303KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 3.0V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B313	-	XC9802B313KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 3.1V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B323	-	XC9802B323KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 3.2V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B333	-	XC9802B333KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 3.3V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B343	-	XC9802B343KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 3.4V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B353	-	XC9802B353KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 3.5V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B363	-	XC9802B363KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 3.6V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B373	-	XC9802B373KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 3.7V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B383	-	XC9802B383KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 3.8V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B393	-	XC9802B393KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 3.9V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B403	-	XC9802B403KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 4.0V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B413	-	XC9802B413KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 4.1V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B423	-	XC9802B423KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 4.2V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B433	-	XC9802B433KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 4.3V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B443	-	XC9802B443KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 4.4V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B453	-	XC9802B453KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 4.5V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B463	-	XC9802B463KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 4.6V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B473	-	XC9802B473KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 4.7V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B483	-	XC9802B483KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 4.8V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B493	-	XC9802B493KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 4.9V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B503	-	XC9802B503KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 5.0V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B513	-	XC9802B513KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 5.1V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B523	-	XC9802B523KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 5.2V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B533	-	XC9802B533KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 5.3V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B543	-	XC9802B543KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 5.4V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B553	-	XC9802B553KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 5.5V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B563	-	XC9802B563KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 5.6V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B573	-	XC9802B573KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 5.7V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B583	-	XC9802B583KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 5.8V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B593	-	XC9802B593KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 5.9V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3B603	-	XC9802B603KR-G	DC-DC-IC	PFM pulse skip, step-up, 300kHz, 6.0V±2%, 80mA, +CE	MSOP-8A	gx	-	8f	Tor
3C	-	R1161D231A	LVR-IC	LDO, 2.3V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
3Cs	-	BC857S	Si-pnp	Dual, AF, 50V, 100mA, 310mW, B=90..270, >100MHz	SOT-363	33	T10	7l	Inf
3D	-	R1161D331A	LVR-IC	LDO, 3.3V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
3Ds	-	BC856S	Si-pnp	Dual, AF, 80V, 100mA, 310mW, B=90..270, >100MHz	SOT-363	33	T10	7b	Sie
3F	-	BC857BDW	Si-pnp	Dual, GP, 50V, 100mA, 250mW, B=220..475, >100MHz	SOT-363	33	T10	7b	Ons
3F	-	BC857BV	Si-pnp	Dual, AF, 50V, 100mA, 310mW, B=90..270, >100MHz	SOT-666	35	T10	7b	Phi
3F	-	R1161D131B	LVR-IC	LDO, 1.3V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
3Ft	-	BC857BS	Si-pnp	Dual, AF, 50V, 100mA, 310mW, B=90..270, >100MHz	SOT-363	33	T10	7b	Phi



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3G	-	BC857CDW	Si-pnp	Dual, GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-363	33	T10	7c	Ons
3G	-	R1161D231B	LVR-IC	LDO, 2.3V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
3G04	-	U74HCT3G04-P08	CMOS-Log	Triple inverters	TSSOP-8	47	Log56	7b	Utc
3G04	-	U74HCT3G04-SM1	CMOS-Log	Triple inverters	MSOP-8	47	Log56	8d	Utc
3G04L	-	U74HCT3G04L-P08	CMOS-Log	Triple inverters	TSSOP-8	47	Log56	7b	Utc
3G04L	-	U74HCT3G04L-SM1	CMOS-Log	Triple inverters	MSOP-8	47	Log56	8d	Utc
3G34	-	U74HCT3G34-P08	CMOS-Log	Triple non-inverter buffers	TSSOP-8	47	Log69	7b	Utc
3G34	-	U74HCT3G34-SM1	CMOS-Log	Triple non-inverter buffers	MSOP-8	47	Log69	8d	Utc
3G34L	-	U74HCT3G34L-P08	CMOS-Log	Triple non-inverter buffers	TSSOP-8	47	Log69	7b	Utc
3G34L	-	U74HCT3G34L-SM1	CMOS-Log	Triple non-inverter buffers	MSOP-8	47	Log69	8d	Utc
3H	-	R1161D331B	LVR-IC	LDO, 3.3V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
3K	-	BC858BDW	Si-pnp	Dual, GP, 30V, 100mA, 250mW, B=220..475, >100MHz	SOT-363	33	T10	7c	Ons
3K	-	R1161D131D	LVR-IC	LDO, 1.3V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
3L	-	BC858CDW	Si-pnp	Dual, GP, 30V, 100mA, 250mW, B=420..800, >100MHz	SOT-363	33	T10	7c	Ons
3L	-	R1161D231D	LVR-IC	LDO, 2.3V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
3M	-	R1161D331D	LVR-IC	LDO, 3.3V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
4	-	ECG001F-G	MMIC	Buff/amp, DC..6GHz, 22dB (1GHz, 50Ω)	SOT-363	33a1	A1	7j	Wjc
40-	-	BAS40XY	Si-diode	Quad, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-363	33	D10	7b	NxH
400	-	TK15400M	Lin-IC	5V, 75Ω, 6dB, triple video line driver, stand-by	SOP-12	60	-	8c	Tok
401	-	TK15401M	Lin-IC	5V, 75Ω, 6dB, triple video line driver, stand-by	SOP-12	60	-	8c	Tok
402	-	TK15402M	Lin-IC	5V, 75Ω, 6dB, triple video line driver, stand-by	SOP-12	60	-	8c	Tok
403	-	KAB3403T	LDR-IC	1.1 MHz White LED step-up DC/DC converter, OVP 21V	TS6	33le	LD2	7k	Kec
403	-	TK15403M	Lin-IC	5V, 75Ω, 6dB, dual video line driver, stand-by	SOP-8	47	-	8d	Tok
404	-	TK15404M	Lin-IC	5V, 75Ω, 6dB, video line driver, stand-by	SOP-6	33	-	7b	Tok
405	-	KAB3405T	LDR-IC	1 MHz White LED step-up DC/DC converter, OVP 38V	TS6	33lf	LD2	7k	Kec
405	-	TK15405M	Lin-IC	5V, 75Ω, 6dB, video line driver, stand-by	SOP-6	33	-	7b	Tok
406	-	TK15406M	Lin-IC	5V, 75Ω, 6dB, video line driver, stand-by	SOP-6	33	-	7b	Tok
407	-	TK15407M	Lin-IC	5V, 75Ω, 6dB, dual video line driver, stand-by	SOP-8	47	-	8d	Tok
408	-	TK15408M	Lin-IC	5V, 75Ω, 6dB, dual video line driver, stand-by	SOP-8	47	-	8d	Tok
409	-	TK15409M	Lin-IC	5V, 75Ω, 6dB, dual video line driver, stand-by	SOP-8	47	-	8d	Tok
40A	-	TK74040L	LVR-IC	LDO, Dual out, Vout1/Vout2=4V/4V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
40p	-	BAS40XY	Si-diode	Quad, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-363	33	D10	7b	NxH
40P	-	TK11240BM	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
40Q	-	TK11340BM	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
40R	-	TK11340CM	LVR-IC	LDO, 4.0V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
40t	-	BAS40XY	Si-diode	Quad, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-363	33	D10	7b	NxM
40T	-	MMBZ5240BTW	Z-diode	Triple, 10V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOT-363	33dd	-	7c	Pjt
40W	-	BAS40XY	Si-diode	Quad, SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOT-363	33	D10	7b	NxC
410	-	TK15410M	Lin-IC	5V, 75Ω, 6dB, video line driver, logic control	SOP-8	47	-	8d	Tok
4103	-	MD4103P	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 3W(5V/4Ω), shutdown	SOP-8EP	47	-	8d	Mep
4103	-	MD4103S	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 3W(5V/4Ω), shutdown	MSOP-8	55	-	8d	Mep
4105P	-	MD4105P	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 3.3W(5V/4Ω), shutdown	SOP-8	47	-	8d	Mep
4105S	-	MD4105S	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 3.3W(5V/4Ω), shutdown	MSOP-8	55	-	8d	Mep
411	-	TK15411M	Lin-IC	5V, 75Ω, 6dB, video line driver, logic control	SOP-8	47	-	8d	Tok
412	-	TK15412M	Lin-IC	5V, 75Ω, 6dB, video line driver, stand-by	SOP-8	47	-	8d	Tok
413	-	TK15413M	Lin-IC	5V, 75Ω, 6dB, video line driver, stand-by	SOP-8	47	-	8d	Tok
414	-	TK15414M	Lin-IC	5V, 75Ω, 6dB, dual video line driver, stand-by	SOP-8	47	-	8d	Tok
415	-	TK15415M	Lin-IC	5V, 75Ω, 6dB, dual video line driver, stand-by	SOP-8	47	-	8d	Tok
418	-	TK65418M	DC-DC-IC	PCA, step-down, 1.8V±3%, 100mA, Vbat monitor	SOT-23L-6	33	-	7b	Tok
419	-	TK65419M	DC-DC-IC	PCA, step-down, 1.9V±3%, 100mA, Vbat monitor	SOT-23L-6	33	-	7b	Tok
41A	-	TK74041L	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.1V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
41P	-	TK11241BM	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
41Q	-	TK11341BM	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
41T	-	MMBZ5241BTW	Z-diode	Triple, 11V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOT-363	33dd	-	7c	Pjt
420	-	TK15420M	Lin-IC	5V, 75Ω, 6dB, dual video line driver	SOP-8	47	-	8d	Tok
420	-	TK65420M	DC-DC-IC	PCA, step-down, 2.0V±3%, 100mA, Vbat monitor	SOT-23L-6	33	-	7b	Tok
4201A	-	SN4201M	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.4W(5V/4Ω), shutdown	MSOP-8	55	AFP22	8d	Se
421	-	TK15421M	Lin-IC	5V, 75Ω, 6dB, dual video line driver	SOP-8	47	-	8d	Tok
421	-	TK65421M	DC-DC-IC	PCA, step-down, 2.1V±3%, 100mA, Vbat monitor	SOT-23L-6	33	-	7b	Tok
422	-	TK65422M	DC-DC-IC	PCA, step-down, 2.2V±3%, 100mA, Vbat monitor	SOT-23L-6	33	-	7b	Tok
423	-	TK65423M	DC-DC-IC	PCA, step-down, 2.3V±3%, 100mA, Vbat monitor	SOT-23L-6	33	-	7b	Tok
424	-	TK65424M	DC-DC-IC	PCA, step-down, 2.4V±3%, 100mA, Vbat monitor	SOT-23L-6	33	-	7b	Tok
425	-	TK65425M	DC-DC-IC	PCA, step-down, 2.5V±3%, 100mA, Vbat monitor	SOT-23L-6	33	-	7b	Tok
426	-	TK65426M	DC-DC-IC	PCA, step-down, 2.6V±3%, 100mA, Vbat monitor	SOT-23L-6	33	-	7b	Tok
427	-	TK65427M	DC-DC-IC	PCA, step-down, 2.7V±3%, 100mA, Vbat monitor	SOT-23L-6	33	-	7b	Tok
428	-	TK65428M	DC-DC-IC	PCA, step-down, 2.8V±3%, 100mA, Vbat monitor	SOT-23L-6	33	-	7b	Tok
42A	-	TK74042L	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.2V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
42P	-	TK11242BM	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
42Q	-	TK11342BM	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
42T	-	MMBZ5242BTW	Z-diode	Triple, 12V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-363	33dd	-	7c	Pjt



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
430	-	TK65430M	DC-DC-IC	PCA, step-down, 3.0V±3%, 100mA, Vbat monitor	SOT-23L-6	33	-	7b	Tok
431	-	TK65431M	DC-DC-IC	PCA, step-down, 3.1V±3%, 100mA, Vbat monitor	SOT-23L-6	33	-	7b	Tok
431ACM	-	LM431ACM	Vref-IC	Adjust Precision Shunt, 2,44,.2,55V±2%, 0..+70°	SOP-8	47	RF2	8d	Nsc
431AIM	-	LM431AIM	Vref-IC	Adjust Precision Shunt, 2,44,.2,55V±2%, -40..+85°	SOP-8	47	RF2	8d	Nsc
431BCM	-	LM431BCM	Vref-IC	Adjust Precision Shunt, 2,44,.2,55V±1%, 0..+70°	SOP-8	47	RF2	8d	Nsc
431BIM	-	LM431BIM	Vref-IC	Adjust Precision Shunt, 2,44,.2,55V±1%, -40..+85°	SOP-8	47	RF2	8d	Nsc
431CCM	-	LM431CCM	Vref-IC	Adjust Precision Shunt, 2,44,.2,55V± 0,5%, 0..+70°	SOP-8	47	RF2	8d	Nsc
431CIM	-	LM431CIM	Vref-IC	Adjust Precision Shunt, 2,44,.2,55V±0,5%, -40..+85°	SOP-8	47	RF2	8d	Nsc
432	-	TK65432M	DC-DC-IC	PCA, step-down, 3.2V±3%, 100mA, Vbat monitor	SOT-23L-6	33	-	7b	Tok
433	-	TK65433M	DC-DC-IC	PCA, step-down, 3.3V±3%, 100mA, Vbat monitor	SOT-23L-6	33	-	7b	Tok
43A	-	TK74043L	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.3V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
43P	-	TK11243BM	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
43Q	-	TK11343BM	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
43T	-	MMBZ5243BTW	Z-diode	Triple, 13V±5%, Izt=9.5mA, Zzt=13Ω, 200mW	SOT-363	33dd	-	7c	Pjt
44A	-	TK74044L	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.4V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
44P	-	TK11244BM	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
44Q	-	TK11344BM	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
44R	-	µPA811T-FB	Si-npn	Dual, VHF/UHF, 20V, 35mA, 8.5GHz, B=40..80	SOT-363	33tf	T1	7b	Nec
44T	-	MMBZ5244BTW	Z-diode	Triple, 14V±5%, Izt=9.0mA, Zzt=15Ω, 200mW	SOT-363	33dd	-	7c	Pjt
453	-	XC74WL4053SR	CMOS-Log	2-channel analog multiplexer/demultiplexer	MSOP-8B	a6	Log58	8d	Tor
45A	-	TK74045L	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.5V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
45P	-	TK11245BM	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
45Q	-	TK11345BM	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
45R	-	µPA811T-GB	Si-npn	Dual, VHF/UHF, 20V, 35mA, 8.5GHz, B=70..140	SOT-363	33tf	T1	7b	Nec
45R	-	TK11345CM	LVR-IC	LDO, 4.5V, 5%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
45T	-	MMBZ5245BTW	Z-diode	Triple, 15V±5%, Izt=8.5mA, Zzt=16Ω, 200mW	SOT-363	33dd	-	7c	Pjt
46	-	MBT3946DW	Si-n/p	Dual, GP, 60V, 200mA, 150mW, B= 100..300, >300MHz	SOT-363	33	T9	7b	Ons
4601C	-	THS4601CD	Op-IC	Wide-band, JFET, ±15V, 180MHz	SOP-8	47opg	OP1	8d	Ti
4601I	-	THS4601ID	Op-IC	Wide-band, JFET, ±15V, 180MHz	SOP-8	47opg	OP1	8d	Ti
460BI1	-	LT1460BIS8-10	Vref-IC	µPower, Precision, Series, 10V±0.075%	S8	47af	VR1	8d	Ltc
460BI2	-	LT1460BIS8-2.5	Vref-IC	µPower, Precision, Series, 2.5V±0.075%	S8	47af	VR1	8d	Ltc
460BI5	-	LT1460BIS8-5	Vref-IC	µPower, Precision, Series, 5.0V±0.075%	S8	47af	VR1	8d	Ltc
460EI1	-	LT1460EIS8-10	Vref-IC	µPower, Precision, Series, 10V±0.075%	S8	47af	VR1	8d	Ltc
460EI2	-	LT1460EIS8-2.5	Vref-IC	µPower, Precision, Series, 2.5V±0.075%	S8	47af	VR1	8d	Ltc
460EI5	-	LT1460EIS8-5	Vref-IC	µPower, Precision, Series, 5.0V±0.075%	S8	47af	VR1	8d	Ltc
468	-	XC74WL4066SR	CMOS-Log	2-channel analog switch	MSOP-8B	a6	Log68	8d	Tor
46A	-	TK74046L	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.6V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
46P	-	TK11246BM	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
46Q	-	TK11346BM	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
46T	-	MMBZ5246BTW	Z-diode	Triple, 16V±5%, Izt=7.8mA, Zzt=17Ω, 200mW	SOT-363	33dd	-	7c	Pjt
47A	-	TK74047L	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.7V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
47P	-	TK11247BM	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
47Q	-	TK11347BM	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
47R	-	TK11347CM	LVR-IC	LDO, 4.7V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
47T	-	MMBZ5247BTW	Z-diode	Triple, 17V±5%, Izt=8.0mA, Zzt=19Ω, 200mW	SOT-363	33dd	-	7c	Pjt
482I	-	TS482ID	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω)	SOP-8	47	AFP6	8d	Ste
482I	-	TS482IST	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω)	SSOP-8	47	AFP6	8d	Ste
482I	-	TS482IT	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω)	SOP-8	47	AFP6	8d	Ste
4863	-	MC4863M	Lin-IC	AF PA, BTL, 2..5.5V, 2x2.2W(5V/4Ω)	TSSOP-20	60	-	8d	Mep
4863	-	MC4863MP	Lin-IC	AF PA, BTL, 2..5.5V, 2x2.2W(5V/4Ω)	TSSOP-20EP	60	-	8d	Mep
4863	-	MC4863P	Lin-IC	AF PA, BTL, 2..5.5V, 2x2.2W(5V/4Ω)	TSSOP-16EP	60	-	8d	Mep
4863	-	MC4863S	Lin-IC	AF PA, BTL, 2..5.5V, 2x2.2W(5V/4Ω)	SOP-16	60	-	8d	Mep
4871	-	TS4871IST	Lin-IC	AF PA, BTL, 2.5..5.5V, 1W(5V/8Ω), shutdown	SSOP-8	47	AFP11	8d	Ste
4871I	-	TS4871IDT	Lin-IC	AF PA, BTL, 2.5..5.5V, 1W(5V/8Ω), shutdown	SOP-8	47	AFP11	8d	Ste
4873	-	MC4873LP	Lin-IC	AF PA, BTL, 2..5.5V, 2x2.1W(5V /4Ω)	TSSOP-28EP	60	-	8d	Mep
4873	-	MC4873M	Lin-IC	AF PA, BTL, 2..5.5V, 2x2.1W(5V /4Ω)	TSSOP-20	60	-	8d	Mep
4873	-	MC4873MP	Lin-IC	AF PA, BTL, 2..5.5V, 2x2.1W(5V /4Ω)	TSSOP-20EP	60	-	8d	Mep
4890	-	MC4890S	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.5W(5V/8Ω), shutdown	MSOP-8	55	AFP12	8d	Mep
4890	-	TS4890IDT	Lin-IC	AF PA, BTL, 2.5..5.5V, 1W(5V/8Ω), shutdown	SOP-8	47	AFP12	8d	Ste
4890I	-	TS4890IST	Lin-IC	AF PA, BTL, 2.5..5.5V, 1W(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Ste
4890M	-	SH4890M	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	SOP-8	47	AFP12	8d	Sit
48A	-	TK74048L	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.8V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
48P	-	TK11248BM	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
48Q	-	TK11348BM	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
48R	-	TK11348CM	LVR-IC	LDO, 4.8V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
48T	-	MMBZ5248BTW	Z-diode	Triple, 18V±5%, Izt=7.0mA, Zzt=23Ω, 200mW	SOT-363	33dd	-	7c	Pjt
4910B	-	SN4910M	Lin-IC	AF PA, BTL, 2.2..5.5V, 2x35mW(5V/32Ω), shutdown	MSOP-8	55	AFP29	8d	Se
4913	-	LM4913MH	Lin-IC	AF PA, BTL, 3..5.5V, 2W(3V/4Ω), shutdown	SOP-10	60	AFP42	8d	Nsc
4914	-	LM4914MH	Lin-IC	AF PA, BTL, 2.5..5.5V, 1W(5V/8Ω), shutdown	SSOP-10	60	-	8d	Nsc
49A	-	TK74049L	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.9V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
49P	-	TK11249BM	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
49Q	-	TK11349BM	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
49T	-	MMBZ5249BTW	Z-diode	Triple, 19V±5%, Izt=6.6mA, Zzt=23Ω, 200mW	SOT-363	33dd	-	7c	Pjt
4AA	-	FT521AAa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/1.2V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4AB	-	FT521ABa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/1.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4AC	-	FT521ACa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/1.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4AD	-	FT521ADa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4AE	-	FT521AEa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4AF	-	FT521AFa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/2.7V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4AG	-	FT521AGa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4AH	-	FT521AHa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/2.85V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4AI	-	FT521AIa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/3.0V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4AJ	-	FT521AJa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4AK	-	FT521AKa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/3.6V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4B	-	R1161D141A	LVR-IC	LDO, 1.4V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
4BA	-	FT521BAa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/1.2V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4BB	-	FT521BBa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/1.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4BC	-	FT521BCa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/1.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4BD	-	FT521BDa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4BE	-	FT521BEa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4BF	-	FT521BFa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/2.7V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4BG	-	FT521BGa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4BH	-	FT521BHa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/2.85V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4BI	-	FT521BIa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/3.0V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4BJ	-	FT521BJa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4BK	-	FT521BKa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.3V/3.6V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4C	-	R1161D241A	LVR-IC	LDO, 2.4V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
4C25A	-	XC9101C25AKR	DC-DC-IC	PWM, step-up, 2.5V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C26A	-	XC9101C26AKR	DC-DC-IC	PWM, step-up, 2.6V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C27A	-	XC9101C27AKR	DC-DC-IC	PWM, step-up, 2.7V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C28A	-	XC9101C28AKR	DC-DC-IC	PWM, step-up, 2.8V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C29A	-	XC9101C29AKR	DC-DC-IC	PWM, step-up, 2.9V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C30A	-	XC9101C30AKR	DC-DC-IC	PWM, step-up, 3.0V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C31A	-	XC9101C31AKR	DC-DC-IC	PWM, step-up, 3.1V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C32A	-	XC9101C32AKR	DC-DC-IC	PWM, step-up, 3.2V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C33A	-	XC9101C33AKR	DC-DC-IC	PWM, step-up, 3.3V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C34A	-	XC9101C34AKR	DC-DC-IC	PWM, step-up, 3.4V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C35A	-	XC9101C35AKR	DC-DC-IC	PWM, step-up, 3.5V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C36A	-	XC9101C36AKR	DC-DC-IC	PWM, step-up, 3.6V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C37A	-	XC9101C37AKR	DC-DC-IC	PWM, step-up, 3.7V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C38A	-	XC9101C38AKR	DC-DC-IC	PWM, step-up, 3.8V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C39A	-	XC9101C39AKR	DC-DC-IC	PWM, step-up, 3.9V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C40A	-	XC9101C40AKR	DC-DC-IC	PWM, step-up, 4.0V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C41A	-	XC9101C41AKR	DC-DC-IC	PWM, step-up, 4.1V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C42A	-	XC9101C42AKR	DC-DC-IC	PWM, step-up, 4.2V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C43A	-	XC9101C43AKR	DC-DC-IC	PWM, step-up, 4.3V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C44A	-	XC9101C44AKR	DC-DC-IC	PWM, step-up, 4.4V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C45A	-	XC9101C45AKR	DC-DC-IC	PWM, step-up, 4.5V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C46A	-	XC9101C46AKR	DC-DC-IC	PWM, step-up, 4.6V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C47A	-	XC9101C47AKR	DC-DC-IC	PWM, step-up, 4.7V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C48A	-	XC9101C48AKR	DC-DC-IC	PWM, step-up, 4.8V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C49A	-	XC9101C49AKR	DC-DC-IC	PWM, step-up, 4.9V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C50A	-	XC9101C50AKR	DC-DC-IC	PWM, step-up, 5.0V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C51A	-	XC9101C51AKR	DC-DC-IC	PWM, step-up, 5.1V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C52A	-	XC9101C52AKR	DC-DC-IC	PWM, step-up, 5.2V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C53A	-	XC9101C53AKR	DC-DC-IC	PWM, step-up, 5.3V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C54A	-	XC9101C54AKR	DC-DC-IC	PWM, step-up, 5.4V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C55A	-	XC9101C55AKR	DC-DC-IC	PWM, step-up, 5.5V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C56A	-	XC9101C56AKR	DC-DC-IC	PWM, step-up, 5.6V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C57A	-	XC9101C57AKR	DC-DC-IC	PWM, step-up, 5.7V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C58A	-	XC9101C58AKR	DC-DC-IC	PWM, step-up, 5.8V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C59A	-	XC9101C59AKR	DC-DC-IC	PWM, step-up, 5.9V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C60A	-	XC9101C60AKR	DC-DC-IC	PWM, step-up, 6.0V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C61A	-	XC9101C61AKR	DC-DC-IC	PWM, step-up, 6.1V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C62A	-	XC9101C62AKR	DC-DC-IC	PWM, step-up, 6.2V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C63A	-	XC9101C63AKR	DC-DC-IC	PWM, step-up, 6.3V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C64A	-	XC9101C64AKR	DC-DC-IC	PWM, step-up, 6.4V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C65A	-	XC9101C65AKR	DC-DC-IC	PWM, step-up, 6.5V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C66A	-	XC9101C66AKR	DC-DC-IC	PWM, step-up, 6.6V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C67A	-	XC9101C67AKR	DC-DC-IC	PWM, step-up, 6.7V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4C68A	-	XC9101C68AKR	DC-DC-IC	PWM, step-up, 6.8V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C69A	-	XC9101C69AKR	DC-DC-IC	PWM, step-up, 6.9V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C70A	-	XC9101C70AKR	DC-DC-IC	PWM, step-up, 7.0V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C71A	-	XC9101C71AKR	DC-DC-IC	PWM, step-up, 7.1V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C72A	-	XC9101C72AKR	DC-DC-IC	PWM, step-up, 7.2V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C73A	-	XC9101C73AKR	DC-DC-IC	PWM, step-up, 7.3V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C74A	-	XC9101C74AKR	DC-DC-IC	PWM, step-up, 7.4V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C75A	-	XC9101C75AKR	DC-DC-IC	PWM, step-up, 7.5V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C76A	-	XC9101C76AKR	DC-DC-IC	PWM, step-up, 7.6V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C77A	-	XC9101C77AKR	DC-DC-IC	PWM, step-up, 7.7V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C78A	-	XC9101C78AKR	DC-DC-IC	PWM, step-up, 7.8V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C79A	-	XC9101C79AKR	DC-DC-IC	PWM, step-up, 7.9V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C80A	-	XC9101C80AKR	DC-DC-IC	PWM, step-up, 8.0V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C81A	-	XC9101C81AKR	DC-DC-IC	PWM, step-up, 8.1V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C82A	-	XC9101C82AKR	DC-DC-IC	PWM, step-up, 8.2V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C83A	-	XC9101C83AKR	DC-DC-IC	PWM, step-up, 8.3V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C84A	-	XC9101C84AKR	DC-DC-IC	PWM, step-up, 8.4V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C85A	-	XC9101C85AKR	DC-DC-IC	PWM, step-up, 8.5V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C86A	-	XC9101C86AKR	DC-DC-IC	PWM, step-up, 8.6V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C87A	-	XC9101C87AKR	DC-DC-IC	PWM, step-up, 8.7V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C88A	-	XC9101C88AKR	DC-DC-IC	PWM, step-up, 8.8V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C89A	-	XC9101C89AKR	DC-DC-IC	PWM, step-up, 8.9V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C90A	-	XC9101C90AKR	DC-DC-IC	PWM, step-up, 9.0V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C91A	-	XC9101C91AKR	DC-DC-IC	PWM, step-up, 9.1V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C92A	-	XC9101C92AKR	DC-DC-IC	PWM, step-up, 9.2V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C93A	-	XC9101C93AKR	DC-DC-IC	PWM, step-up, 9.3V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C94A	-	XC9101C94AKR	DC-DC-IC	PWM, step-up, 9.4V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C95A	-	XC9101C95AKR	DC-DC-IC	PWM, step-up, 9.5V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C96A	-	XC9101C96AKR	DC-DC-IC	PWM, step-up, 9.6V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C97A	-	XC9101C97AKR	DC-DC-IC	PWM, step-up, 9.7V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C98A	-	XC9101C98AKR	DC-DC-IC	PWM, step-up, 9.8V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4C99A	-	XC9101C99AKR	DC-DC-IC	PWM, step-up, 9.9V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CA	-	FT521CAa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.2V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4CA0A	-	XC9101CA0AKR	DC-DC-IC	PWM, step-up, 10.0V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CA1A	-	XC9101CA1AKR	DC-DC-IC	PWM, step-up, 10.1V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CA2A	-	XC9101CA2AKR	DC-DC-IC	PWM, step-up, 10.2V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CA3A	-	XC9101CA3AKR	DC-DC-IC	PWM, step-up, 10.3V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CA4A	-	XC9101CA4AKR	DC-DC-IC	PWM, step-up, 10.4V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CA5A	-	XC9101CA5AKR	DC-DC-IC	PWM, step-up, 10.5V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CA6A	-	XC9101CA6AKR	DC-DC-IC	PWM, step-up, 10.6V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CA7A	-	XC9101CA7AKR	DC-DC-IC	PWM, step-up, 10.7V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CA8A	-	XC9101CA8AKR	DC-DC-IC	PWM, step-up, 10.8V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CA9A	-	XC9101CA9AKR	DC-DC-IC	PWM, step-up, 10.9V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CB	-	FT521CBa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4CB0A	-	XC9101CB0AKR	DC-DC-IC	PWM, step-up, 11.0V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CB1A	-	XC9101CB1AKR	DC-DC-IC	PWM, step-up, 11.1V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CB2A	-	XC9101CB2AKR	DC-DC-IC	PWM, step-up, 11.2V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CB3A	-	XC9101CB3AKR	DC-DC-IC	PWM, step-up, 11.3V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CB4A	-	XC9101CB4AKR	DC-DC-IC	PWM, step-up, 11.4V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CB5A	-	XC9101CB5AKR	DC-DC-IC	PWM, step-up, 11.5V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CB6A	-	XC9101CB6AKR	DC-DC-IC	PWM, step-up, 11.6V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CB7A	-	XC9101CB7AKR	DC-DC-IC	PWM, step-up, 11.7V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CB8A	-	XC9101CB8AKR	DC-DC-IC	PWM, step-up, 11.8V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CB9A	-	XC9101CB9AKR	DC-DC-IC	PWM, step-up, 11.9V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CC	-	FT521CCa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4CC0A	-	XC9101CC0AKR	DC-DC-IC	PWM, step-up, 12.0V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CC1A	-	XC9101CC1AKR	DC-DC-IC	PWM, step-up, 12.1V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CC2A	-	XC9101CC2AKR	DC-DC-IC	PWM, step-up, 12.2V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CC3A	-	XC9101CC3AKR	DC-DC-IC	PWM, step-up, 12.3V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CC4A	-	XC9101CC4AKR	DC-DC-IC	PWM, step-up, 12.4V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CC5A	-	XC9101CC5AKR	DC-DC-IC	PWM, step-up, 12.5V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CC6A	-	XC9101CC6AKR	DC-DC-IC	PWM, step-up, 12.6V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CC7A	-	XC9101CC7AKR	DC-DC-IC	PWM, step-up, 12.7V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CC8A	-	XC9101CC8AKR	DC-DC-IC	PWM, step-up, 12.8V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CC9A	-	XC9101CC9AKR	DC-DC-IC	PWM, step-up, 12.9V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CD	-	FT521CDa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4CD0A	-	XC9101CD0AKR	DC-DC-IC	PWM, step-up, 13.0V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CD1A	-	XC9101CD1AKR	DC-DC-IC	PWM, step-up, 13.1V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CD2A	-	XC9101CD2AKR	DC-DC-IC	PWM, step-up, 13.2V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CD3A	-	XC9101CD3AKR	DC-DC-IC	PWM, step-up, 13.3V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4CD4A	-	XC9101CD4AKR	DC-DC-IC	PWM, step-up, 13.4V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CD5A	-	XC9101CD5AKR	DC-DC-IC	PWM, step-up, 13.5V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CD6A	-	XC9101CD6AKR	DC-DC-IC	PWM, step-up, 13.6V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CD7A	-	XC9101CD7AKR	DC-DC-IC	PWM, step-up, 13.7V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CD8A	-	XC9101CD8AKR	DC-DC-IC	PWM, step-up, 13.8V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CD9A	-	XC9101CD9AKR	DC-DC-IC	PWM, step-up, 13.9V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CE	-	FT521CEa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4CE0A	-	XC9101CE0AKR	DC-DC-IC	PWM, step-up, 14.0V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CE1A	-	XC9101CE1AKR	DC-DC-IC	PWM, step-up, 14.1V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CE2A	-	XC9101CE2AKR	DC-DC-IC	PWM, step-up, 14.2V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CE3A	-	XC9101CE3AKR	DC-DC-IC	PWM, step-up, 14.3V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CE4A	-	XC9101CE4AKR	DC-DC-IC	PWM, step-up, 14.4V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CE5A	-	XC9101CE5AKR	DC-DC-IC	PWM, step-up, 14.5V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CE6A	-	XC9101CE6AKR	DC-DC-IC	PWM, step-up, 14.6V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CE7A	-	XC9101CE7AKR	DC-DC-IC	PWM, step-up, 14.7V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CE8A	-	XC9101CE8AKR	DC-DC-IC	PWM, step-up, 14.8V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CE9A	-	XC9101CE9AKR	DC-DC-IC	PWM, step-up, 14.9V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CF	-	FT521CFa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/2.7V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4CF0A	-	XC9101CF0AKR	DC-DC-IC	PWM, step-up, 15.0V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CF1A	-	XC9101CF1AKR	DC-DC-IC	PWM, step-up, 15.1V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CF2A	-	XC9101CF2AKR	DC-DC-IC	PWM, step-up, 15.2V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CF3A	-	XC9101CF3AKR	DC-DC-IC	PWM, step-up, 15.3V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CF4A	-	XC9101CF4AKR	DC-DC-IC	PWM, step-up, 15.4V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CF5A	-	XC9101CF5AKR	DC-DC-IC	PWM, step-up, 15.5V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CF6A	-	XC9101CF6AKR	DC-DC-IC	PWM, step-up, 15.6V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CF7A	-	XC9101CF7AKR	DC-DC-IC	PWM, step-up, 15.7V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CF8A	-	XC9101CF8AKR	DC-DC-IC	PWM, step-up, 15.8V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CF9A	-	XC9101CF9AKR	DC-DC-IC	PWM, step-up, 15.9V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CG	-	FT521CGa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4CH	-	FT521CHa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/2.85V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4CH0A	-	XC9101CH0AKR	DC-DC-IC	PWM, step-up, 16.0V±2.5%, 1.5A	MSOP-8A	xd	DC17	8f	Tor
4CI	-	FT521CIa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/3.0V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4CJ	-	FT521CJa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4CK	-	FT521CKa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/3.6V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4DA	-	FT521DAa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.2V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4DB	-	FT521DBa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4DC	-	FT521DCa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4DD	-	FT521DDa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4DE	-	FT521DEa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4DF	-	FT521DFa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.7V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4DG	-	FT521DGa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4DH	-	FT521DHa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.85V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4DI	-	FT521DIa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/3.0V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4DJ	-	FT521DJa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4DK	-	FT521DKa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/3.6V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4EA	-	FT521EAa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.2V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4EB	-	FT521EBa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4EC	-	FT521ECa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4ED	-	FT521EDa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4EE	-	FT521EEa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4EF	-	FT521EFa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.7V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4EG	-	FT521EGa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4EH	-	FT521EHa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.85V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4EI	-	FT521EIa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/3.0V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4EJ	-	FT521EJa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4EK	-	FT521EKa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/3.6V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4F	-	R1161D141B	LVR-IC	LDO, 1.4V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
4FA	-	FT521FAa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/1.2V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4FB	-	FT521FBa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/1.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4FC	-	FT521FCa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/1.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4FD	-	FT521FDa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4FE	-	FT521FEa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4FF	-	FT521FFa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.7V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4FG	-	FT521FGa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4FH	-	FT521FHa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.85V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4FI	-	FT521FIa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/3.0V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4FJ	-	FT521FJa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4FK	-	FT521FKa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/3.6V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4Ft	-	BC846S	Si-npn	Dual, GP, 80V, 100mA, 200mW, B>110, >100MHz	SOT-363	33	T8	7b	Phi
4G	-	R1161D241B	LVR-IC	LDO, 2.4V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4GA	-	FT521GAa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.2V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4GB	-	FT521GBa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4GC	-	FT521GCa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4GD	-	FT521GDa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4GE	-	FT521GEa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4GF	-	FT521GFa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.7V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4GG	-	FT521GGa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4GH	-	FT521GHa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.85V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4GI	-	FT521GIa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/3.0V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4GJ	-	FT521GJa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4GK	-	FT521GKa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/3.6V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4HA	-	FT521HAa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.2V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4HB	-	FT521HBa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4HC	-	FT521HCa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4HD	-	FT521HDa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4HE	-	FT521HEa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4HF	-	FT521HFa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.7V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4HG	-	FT521HGa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4HH	-	FT521HHa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.85V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4HI	-	FT521HIa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/3.0V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4HJ	-	FT521HJa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4HK	-	FT521HKa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/3.6V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4IA	-	FT521IAa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.2V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4IB	-	FT521IBa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4IC	-	FT521ICa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4ID	-	FT521IDa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4IE	-	FT521IEa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4IF	-	FT521IFa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.7V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4IG	-	FT521IGa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4IH	-	FT521IHa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.85V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4II	-	FT521IIa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4IJ	-	FT521IJa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4IK	-	FT521IKa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.6V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4JA	-	FT521JAa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.2V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4JB	-	FT521JBa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4JC	-	FT521JCa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4JD	-	FT521JDa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4JE	-	FT521JEa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4JF	-	FT521JFa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.7V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4JG	-	FT521JGa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4JH	-	FT521JHa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.85V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4JI	-	FT521JIa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.0V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4JJ	-	FT521JJa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4JK	-	FT521JKa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.6V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4K	-	R1161D141D	LVR-IC	LDO, 1.4V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
4KA	-	FT521KAa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/1.2V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4KB	-	FT521KBa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/1.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4KC	-	FT521KCa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/1.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4KD	-	FT521KDa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/1.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4KE	-	FT521KEa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/2.5V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4KF	-	FT521KFa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/2.7V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4KG	-	FT521KGa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/2.8V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4KH	-	FT521KHa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/2.85V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4KI	-	FT521KIa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/3.0V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4KJ	-	FT521KJa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/3.3V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4KK	-	FT521KKa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/3.6V±2%, 250mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
4L	-	R1161D241D	LVR-IC	LDO, 2.4V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
5	-	ECG002F-G	MMIC	Buff/amp, DC..6GHz, 20dB (1GHz, 50Ω)	SOT-363	33a1	A1	7j	Wjc
50A	-	TK74050L	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.0V±2%, 300mA, +CE	SOT-23L-8	47uh	VR22	8d	Tok
50P	-	TK11250BM	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
50Q	-	TK11350BM	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
50R	-	TK11350CM	LVR-IC	LDO, 5.0V, 5%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
50T	-	MMBZ5250BTW	Z-diode	Triple, 20V±5%, Izt=6.2mA, Zzt=25Ω, 200mW	SOT-363	33dd	-	7c	Pjt
51T	-	MMBZ5251BTW	Z-diode	Triple, 22V±5%, Izt=5.6mA, Zzt=29Ω, 200mW	SOT-363	33dd	-	7c	Pjt
520	-	TK11520M	LVR-IC	LDO, 2.0V±1.5%, 130mA, ±CE	SOP-8	47ho	-	8d	Tok
525	-	TK11525M	LVR-IC	LDO, 2.5V±1.5%, 130mA, ±CE	SOP-8	47ho	-	8d	Tok
52T	-	MMBZ5252BTW	Z-diode	Triple, 24V±5%, Izt=5.2mA, Zzt=33Ω, 200mW	SOT-363	33dd	-	7c	Pjt
53	-	BAS16VV	Si-diode	Triple, Sw, Fast, 75V, 300mA, Vf<1.25V(150mA), <4ns, 2pF	SOT-666	35dd	-	7b	Nxp
53	-	KIC7W53FK	CMOS-Log	2-channel analog multiplexer/demultiplexer	US8	47	Log58	8c	Kec
530	-	TK11530M	LVR-IC	LDO, 3.0V±1.5%, 130mA, ±CE	SOP-8	47ho	-	8d	Tok

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
532	-	TK11532M	LVR-IC	LDO, 3.2V±1.5%, 130mA, ±CE	SOP-8	47ho	-	8d	Tok
535	-	TK11535M	LVR-IC	LDO, 3.5V±1.5%, 130mA, ±CE	SOP-8	47ho	-	8d	Tok
537	-	TK11537M	LVR-IC	LDO, 3.7V±1.5%, 130mA, ±CE	SOP-8	47ho	-	8d	Tok
53T	-	MMBZ5253BTW	Z-diode	Triple, 25V±5%, Izt=5.0mA, Zzt=35Ω, 200mW	SOT-363	33dd	-	7c	Pjt
540	-	TK11540M	LVR-IC	LDO, 4.0V±1.5%, 130mA, ±CE	SOP-8	47ho	-	8d	Tok
545	-	TK11545M	LVR-IC	LDO, 4.5V±1.5%, 130mA, ±CE	SOP-8	47ho	-	8d	Tok
547	-	TK11547M	LVR-IC	LDO, 4.75V±1.5%, 130mA, ±CE	SOP-8	47ho	-	8d	Tok
54T	-	MMBZ5254BTW	Z-diode	Triple, 27V±5%, Izt=5.0mA, Zzt=41Ω, 200mW	SOT-363	33dd	-	7c	Pjt
55	-	74AUP1Z125GW	CMOS-Log	X-tal driver with enable and internal resistor	SOT-363	33	Log83	7b	Nxp
550	-	TK11550M	LVR-IC	LDO, 5.0V±1.5%, 130mA, ±CE	SOP-8	47ho	-	8d	Tok
550E	-	HMC550E	MMIC	GaAs, SPST failsafe switch, DC-6GHz	SOT-26	33ld	SW1	7b	Htt
555	-	TK11555M	LVR-IC	LDO, 5.5V±1.5%, 130mA, ±CE	SOP-8	47ho	-	8d	Tok
55G4	-	MIC5355-1.8/1.2YMME	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.2V±2%, 500mA, +CE	MSOP-8	55g3	VR19	8d	Mcr
55JG	-	MIC5355-2.5/1.8YMME	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/.8V±2%, 500mA, +CE	MSOP-8	55g3	VR19	8d	Mcr
55P	-	TK11255BM	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
55Q	-	TK11355BM	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
55R	-	TK11355CM	LVR-IC	LDO, 5.5V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
55S4	-	MIC5355-3.3/1.2YMME	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.2V±2%, 500mA, +CE	MSOP-8	55g3	VR19	8d	Mcr
55SC	-	MIC5355-3.3/1.0YMME	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.0V±2%, 500mA, +CE	MSOP-8	55g3	VR19	8d	Mcr
55SG	-	MIC5355-3.3/1.8YMME	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 500mA, +CE	MSOP-8	55g3	VR19	8d	Mcr
55T	-	MMBZ5255BTW	Z-diode	Triple, 28V±5%, Izt=4.5mA, Zzt=44Ω, 200mW	SOT-363	33dd	-	7c	Pjt
56G4	-	MIC5356-1.8/1.2YMME	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.2V±2%, 500mA, +CE, CL	MSOP-8	55g3	VR19	8d	Mcr
56JG	-	MIC5356-2.5/1.8YMME	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.8V±2%, 500mA, +CE, CL	MSOP-8	55g3	VR19	8d	Mcr
56S4	-	MIC5356-3.3/1.2YMME	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.2V±2%, 500mA, +CE, CL	MSOP-8	55g3	VR19	8d	Mcr
56SC	-	MIC5356-3.3/1.0YMME	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.0V±2%, 500mA, +CE, CL	MSOP-8	55g3	VR19	8d	Mcr
56SG	-	MIC5356-3.3/1.8YMME	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 500mA, +CE, CL	MSOP-8	55g3	VR19	8d	Mcr
56T	-	MMBZ5256BTW	Z-diode	Triple, 30V±5%, Izt=4.2mA, Zzt=49Ω, 200mW	SOT-363	33dd	-	7c	Pjt
577	-	TK11577M	LVR-IC	LDO, 7.7V±1.5%, 130mA, ±CE	SOP-8	47ho	-	8d	Tok
57GF	-	MIC5357-1.8/1.5YMME	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.5V±2%, 500mA, +CE	MSOP-8	55e9	VR29	8d	Mcr
57MG	-	MIC5357-2.8/1.8YMME	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 500mA, +CE	MSOP-8	55e9	VR29	8d	Mcr
57SG	-	MIC5357-3.3/1.8YMME	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 500mA, +CE	MSOP-8	55e9	VR29	8d	Mcr
57SM	-	MIC5357-3.3/2.8YMME	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 500mA, +CE	MSOP-8	55e9	VR29	8d	Mcr
57T	-	MMBZ5257BTW	Z-diode	Triple, 33V±5%, Izt=3.8mA, Zzt=58Ω, 200mW	SOT-363	33dd	-	7c	Pjt
580	-	TK11580M	LVR-IC	LDO, 8V±1.5%, 130mA, ±CE	SOP-8	47ho	-	8d	Tok
58T	-	MMBZ5258BTW	Z-diode	Triple, 36V±5%, Izt=3.4mA, Zzt=70Ω, 200mW	SOT-363	33dd	-	7c	Pjt
59T	-	MMBZ5259BTW	Z-diode	Triple, 39V±5%, Izt=3.2mA, Zzt=80Ω, 200mW	SOT-363	33dd	-	7c	Pjt
5A	-	RP500N111A	DC-DC-IC	PWM/VFM st-dwn, 1.1V±24mV, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5A6	-	MMQA5V6	TVS	Quad, Vrwm=5.6V, 24W(1ms)	SC-74	33	D14	7b	Ons
5B	-	R1161D151A	LVR-IC	LDO, 1.5V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
5B	-	RP500N121A	DC-DC-IC	PWM/VFM st-dwn, 1.2V±24mV, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5C	-	R1161D251A	LVR-IC	LDO, 2.5V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
5C	-	RP500N121A5	DC-DC-IC	PWM/VFM st-dwn, 1.25V±24mV, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5D	-	RP500N131A	DC-DC-IC	PWM/VFM st-dwn, 1.3V±24mV, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5DD	-	FT522DDa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.8V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5DD	-	FT522DDb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.8V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5DE	-	FT522DEa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.5V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5DE	-	FT522DEb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.5V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5DF	-	FT522DFa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.7V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5DF	-	FT522DFb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.7V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5DG	-	FT522DGa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.8V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5DG	-	FT522DGb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.8V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5DH	-	FT522DHa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.85V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5DH	-	FT522DHb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.85V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5DI	-	FT522DIa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/3.0V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5DI	-	FT522DIb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/3.0V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5DJ	-	FT522DJa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/3.3V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5DJ	-	FT522DJb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/3.3V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5DK	-	FT522DKa	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/3.6V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5DK	-	FT522DKb	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/3.6V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5E	-	RP500N151A	DC-DC-IC	PWM/VFM st-dwn, 1.5V±24mV, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5ED	-	FT522EDa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.8V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5ED	-	FT522EDb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.8V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5EE	-	FT522EEa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.5V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5EE	-	FT522EEb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.5V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5EF	-	FT522EFa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.7V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5EF	-	FT522EFb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.7V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5EG	-	FT522EGa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.8V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5EG	-	FT522EGb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.8V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5EH	-	FT522EHa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.85V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5EH	-	FT522EHb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.85V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5EI	-	FT522EIa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/3.0V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5EI	-	FT522EIb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/3.0V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5EJ	-	FT522EJa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/3.3V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5EJ	-	FT522EJb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/3.3V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5EK	-	FT522EKa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/3.6V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5EK	-	FT522EKb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/3.6V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5F	-	R1161D151B	LVR-IC	LDO, 1.5V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
5F	-	RP500N181A	DC-DC-IC	PWM/VFM st-dwn, 1.8V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5FD	-	FT522FDa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/1.8V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5FD	-	FT522FDb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/1.8V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5FE	-	FT522FEa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.5V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5FE	-	FT522FEb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.5V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5FF	-	FT522FFa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.7V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5FF	-	FT522FFb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.7V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5FG	-	FT522FGa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.8V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5FG	-	FT522FGb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.8V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5FH	-	FT522FHa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.85V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5FH	-	FT522FHb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.85V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5FI	-	FT522FIa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/3.0V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5FI	-	FT522FIb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/3.0V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5FJ	-	FT522FJa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/3.3V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5FJ	-	FT522FJb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/3.3V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5FK	-	FT522FKa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/3.6V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5FK	-	FT522FKb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/3.6V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5Ft	-	BC856S	Si-pnp	Dual, AF, 80V, 100mA, 200mW, B>110, >100MHz	SC-88	33	T10	7b	Phi
5G	-	R1161D251B	LVR-IC	LDO, 2.5V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
5G	-	RP500N251A	DC-DC-IC	PWM/VFM st-dwn, 2.5V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5GD	-	FT522GDa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5GD	-	FT522GDb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5GE	-	FT522GEa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.5V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5GE	-	FT522GEb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.5V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5GF	-	FT522GFa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.7V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5GF	-	FT522GFb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.7V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5GG	-	FT522GGa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5GG	-	FT522GGb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5GH	-	FT522GHa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.85V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5GH	-	FT522GHb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.85V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5GI	-	FT522GIa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/3.0V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5GI	-	FT522GIb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/3.0V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5GJ	-	FT522GJa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/3.3V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5GJ	-	FT522GJb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/3.3V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5GK	-	FT522GKa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/3.6V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5GK	-	FT522GKb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/3.6V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5H	-	RP500N331A	DC-DC-IC	PWM/VFM st-dwn, 3.3V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5HD	-	FT522HDa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.8V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5HD	-	FT522HDb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.8V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5HE	-	FT522HEa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.5V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5HE	-	FT522HEb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.5V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5HF	-	FT522HFa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.7V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5HF	-	FT522HFb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.7V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5HG	-	FT522HGa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.8V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5HG	-	FT522HGb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.8V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5HH	-	FT522HHa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.85V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5HH	-	FT522HHb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.85V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5HI	-	FT522HIa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/3.0V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5HI	-	FT522HIb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/3.0V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5HJ	-	FT522HJa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/3.3V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5HJ	-	FT522HJb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/3.3V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5HK	-	FT522HKa	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/3.6V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5HK	-	FT522HKb	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/3.6V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5ID	-	FT522IDa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.8V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5ID	-	FT522IDb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.8V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5IE	-	FT522IEa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.5V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5IE	-	FT522IEb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.5V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5IF	-	FT522IFa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.7V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5IF	-	FT522IFb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.7V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5IG	-	FT522IGa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.8V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5IG	-	FT522IGb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.8V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5IH	-	FT522IHa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.85V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5IH	-	FT522IHb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.85V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5II	-	FT522IIa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5II	-	FT522IIb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5IJ	-	FT522IJa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.3V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5IJ	-	FT522IJb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.3V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5IK	-	FT522IKa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.6V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5IK	-	FT522IKb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.6V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5J	-	RP500N112A	DC-DC-IC	PWM step-down, 1.1V±24mV, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5JD	-	FT522JDa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5JD	-	FT522JDb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5JE	-	FT522JEa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.5V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5JE	-	FT522JEb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.5V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5JF	-	FT522JFa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.7V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5JF	-	FT522JFb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.7V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5JG	-	FT522JGa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5JG	-	FT522JGb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5JH	-	FT522JHa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.85V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5JH	-	FT522JHb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.85V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5JI	-	FT522JIa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.0V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5JI	-	FT522JIb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.0V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5JJ	-	FT522JJa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5JJ	-	FT522JJb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5JK	-	FT522JKa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.6V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5JK	-	FT522JKb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.6V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5K	-	R1161D151D	LVR-IC	LDO, 1.5V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
5K	-	RP500N122A	DC-DC-IC	PWM step-down, 1.2V±24mV, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5K	-	W4401DW	Si-pnp	Dual, GP, 60V, 150mA, 380mW, B=120..560, 140MHz	SOT-363	33	T10	7b	Wtr
5KD	-	FT522KDa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/1.8V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5KD	-	FT522KDb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/1.8V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5KE	-	FT522KEa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/2.5V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5KE	-	FT522KEb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/2.5V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5KF	-	FT522KFa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/2.7V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5KF	-	FT522KFb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/2.7V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5KG	-	FT522KGa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/2.8V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5KG	-	FT522KGb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/2.8V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5KH	-	FT522KHa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/2.85V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5KH	-	FT522KHb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/2.85V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5KI	-	FT522KIa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/3.0V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5KI	-	FT522KIb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/3.0V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5KJ	-	FT522KJa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/3.3V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5KJ	-	FT522KJb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/3.3V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5KK	-	FT522KKa	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/3.6V±2%, 400mA, +CE	SOT-23-6L	33x5	VR19	7d	Fmd
5KK	-	FT522KKb	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V/3.6V±2%, 400mA, +CE	PSOP-8	47s6	VR19	8i	Fmd
5L	-	R1161D251D	LVR-IC	LDO, 2.5V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
5L	-	RP500N122A5	DC-DC-IC	PWM step-down, 1.25V±24mV, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5M	-	RP500N132A	DC-DC-IC	PWM step-down, 1.3V±24mV, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5N	-	RP500N152A	DC-DC-IC	PWM step-down, 1.5V±24mV, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5P	-	RP500N182A	DC-DC-IC	PWM step-down, 1.8V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5Q	-	DDZX39FTS	Z-diode	Triple, 39V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
5Q	-	RP500N252A	DC-DC-IC	PWM step-down, 2.5V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5R	-	RP500N332A	DC-DC-IC	PWM step-down, 3.3V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5S	-	RP500N161A	DC-DC-IC	PWM/VFM st-dwn, 1.6V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5T	-	RP500N281A	DC-DC-IC	PWM/VFM st-dwn, 2.8V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
5U	-	RP500N114A	DC-DC-IC	PWM step-down, 1.1V±24mV, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
5V	-	RP500N124A	DC-DC-IC	PWM step-down, 1.2V±24mV, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
5W	-	RP500N154A	DC-DC-IC	PWM step-down, 1.5V±24mV, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
5W51	-	TC75W51FK	Op-IC	Dual, CMOS, Vcc=±0.75..±3.5V, Icc0=120µA	SM8	47opd	OP4	8a	Tos
5W51	-	TC75W51FU	Op-IC	Dual, CMOS, Vcc=±0.75..±3.5V, Icc0=120µA	US8	55opd	OP4	8p	Tos
5W54	-	TC75W54FK	Op-IC	Dual, CMOS, Vcc=±0.9..±3.5V, Icc0=200µA	SM8	47opd	OP4	8a	Tos
5W54	-	TC75W54FU	Op-IC	Dual, CMOS, Vcc=±0.9..±3.5V, Icc0=200µA	US8	55opd	OP4	8p	Tos
5W55	-	TC75W55FK	Op-IC	Dual, CMOS, Vcc=±0.9..±3.5V, Icc0=20µA	SM8	47opd	OP4	8a	Tos
5W55	-	TC75W55FU	Op-IC	Dual, CMOS, Vcc=±0.9..±3.5V, Icc0=20µA	US8	55opd	OP4	8p	Tos
5W56	-	TC75W56FK	Comp-IC	Dual, CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	SM8	47opd	OP4	8a	Tos
5W56	-	TC75W56FU	Comp-IC	Dual, CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	US8	55opd	OP4	8p	Tos
5W57	-	TC75W57FK	Comp-IC	Dual, CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	SM8	47opd	OP4	8a	Tos
5W57	-	TC75W57FU	Comp-IC	Dual, CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	US8	55opd	OP4	8p	Tos
5W58	-	TC75W58FK	Comp-IC	Dual, CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	SM8	47opd	OP4	8a	Tos
5W58	-	TC75W58FU	Comp-IC	Dual, CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	US8	55opd	OP4	8p	Tos
5W59	-	TC75W59FK	Comp-IC	Dual, CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	SM8	47opd	OP4	8a	Tos
5W59	-	TC75W59FU	Comp-IC	Dual, CMOS, Vcc=±3.5..±7V, Icc0=200µA, Iout=±35mA	US8	55opd	OP4	8p	Tos
5W60	-	TC75W60FK	Op-IC	Dual, CMOS, Vcc=±0.9..±3.5V, Icc0=20µA	SM8	47opd	OP4	8a	Tos

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5W60	-	TC75W60FU	Op-IC	Dual, CMOS, Vcc=±0.9..±3.5V, Icc0=20μA	US8	55opd	OP4	8p	Tos
5X	-	RP500N184A	DC-DC-IC	PWM step-down, 1.8V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
5Y	-	RP500N254A	DC-DC-IC	PWM step-down, 2.5V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
5Z	-	RP500N284A	DC-DC-IC	PWM step-down, 2.8V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
60LH25	-	LT1460LHS8-2.5	Vref-IC	μPower, Precision, Series, 2.5V±0.075%	S8	47af	VR1	8d	Ltc
60LH5	-	LT1460LHS8-5	Vref-IC	μPower, Precision, Series, 5.0V±0.075%	S8	47af	VR1	8d	Ltc
60MH25	-	LT1460MHS8-2.5	Vref-IC	μPower, Precision, Series, 2.5V±0.075%	S8	47af	VR1	8d	Ltc
60MH5	-	LT1460MHS8-5	Vref-IC	μPower, Precision, Series, 5.0V±0.075%	S8	47af	VR1	8d	Ltc
60P	-	TK11260BM	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
60Q	-	TK11360BM	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
60R	-	TK11360CM	LVR-IC	LDO, 6.0V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
60T	-	MMBZ5260BTW	Z-diode	Triple, 43V±5%, Izt=3.0mA, Zzt=93Ω, 200mW	SOT-363	33dd	-	7c	Pjt
6100A2	-	TPA6100A2D	Lin-IC	AF PA, 1.6..3.6V, 2x50mW(3V/16Ω), shutdown	SOP-8	47	AFP17	8d	Ti
6101A2	-	TPA6101A2D	Lin-IC	AF PA, 1.6..3.6V, 2x50mW(3V/16Ω), shutdown	SOP-8	47	AFP17	8d	Ti
6102A2	-	TPA6102A2D	Lin-IC	AF PA, 1.6..3.6V, 2x50mW(3V/16Ω), shutdown	SOP-8	47	AFP17	8d	Ti
6105	-	BL6105MM	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 1.4W(5V/4Ω), shutdown	SSOP-8	47	AFP24	8d	Shb
6111A2	-	TPA6111A2D	Lin-IC	AF PA, 2.5..5.5V, 2x150mW(5V/16Ω), shutdown	SOP-8	47	AFP16	8d	Ti
6120A2	-	TPA6120A2DWP	Lin-IC	AF PA, ±5...±15V, 2x80mW(±5V/16Ω)	SOP-20	60	-	8d	Ti
613	-	KV1613L	C-diode	Triple, AM-Tunung, 16V, 50mA, 100mW, 19..446pF(8..1V)	SOT-23-6	33ec	-	7b	Tok
6190M	-	CS6190M	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), shutdown	MSOP-8	55	-	8d	Cme
61T	-	MMBZ5261BTW	Z-diode	Triple, 47V±5%, Izt=2.7mA, Zzt=105Ω, 200mW	SOT-363	33dd	-	7c	Pjt
6205	-	EUA6205M	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	SSOP-8	47	AFP22	8d	Eut
6211Q	-	TPA6211A1TDGNRQ1	Lin-IC	AF PA, BTL, 2.5..5.5V, 3.2W(5V/3Ω), shutdown	SSOP-8	47	AFP22	8d	Ti
6214A	-	EUA6214AM	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.7W(5V/8Ω), shutdown	MSOP-8	55	AFP22	8d	Eut
6308G	-	MS6308MG	Lin-IC	AF PA, 2.8..5.5V, 2x31mW(5V/32Ω), shutdown	SSOP-8	47	-	8d	Mos
6331G	-	MS6331MG	Lin-IC	16-bit DAC, AF PA 2x24mW(5V/32Ω)	MSOP-8	47	AFP39	8d	Mos
65	-	BAS40-05V	Si-diode	Quad, SBD, Hi-Speed, 40V, 120mA, <5pF	SOT-666	35	D7	7b	Nxp
66	-	KIC7W66FK	CMOS-Log	2-channel analog switch	US8	47	Log68	8c	Kec
67	-	BAS40-07V	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-666	35de	-	7b	Nxp
6853G	-	MS6853MG	Lin-IC	AF PA, BTL, 2.4..5.5V, 1.9W(5V/4Ω), shutdown	SSOP-10	60	AFP10	8d	Mos
6891G	-	MS6891G	Lin-IC	AF PA, BTL, 2.5..6.5V, 1.5W(5V/4Ω), shutdown	SOP-8	47	AFP11	8d	Mos
6891G	-	MS6891MG	Lin-IC	AF PA, BTL, 2.5..6.5V, 1.5W(5V/4Ω), shutdown	MSOP-8	55	AFP11	8d	Mos
6894G	-	MS6890G	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	SOP-8	47	AFP12	8d	Mos
6894G	-	MS6890MG	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Mos
6894G	-	MS6894MG	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	SSOP-10	60	AFP19	8d	Mos
6895G	-	MS6895G	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	SOP-8	47	AFP40	8d	Mos
6901G	-	MS6901MG	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.1W(5V/8Ω), shutdown	SSOP-10	60	AFP26	8d	Mos
69s	-	BAT62-09S	Si-diode	Dual, Schottky, 40V, 20mA, Vf<1.0V, Cd<0.6pF	SOT-363	33dw	-	7l	Inf
6A	-	RP500N334A	DC-DC-IC	PWM step-down, 3.3V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
6A	-	UN601	Si-pnp+Di	pnp: 80V, 1A, 500mW, 120MHz, Di: 40V, 500mA	SOP-6	33th	-	7b	Pan
6A2	-	MMQA6V2	TVS	Quad, Vrwm=6.2V, 24W(1ms)	SC-74	33	D14	7b	Ons
6A8	-	MMQA6V8	TVS	Quad, Vrwm=6.8V, 24W(1ms)	SC-74	33	D14	7b	Ons
6B	-	R1161D161A	LVR-IC	LDO, 1.6V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
6B	-	RP500N124A5	DC-DC-IC	PWM step-down, 1.25V±24mV, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
6B	-	UN602	Si-pnp+Di	pnp: 15V, 3A, 1W, 120MHz, Di: 30V, 300mA	SOP-6	33th	-	7b	Pan
6C	-	R1161D261A	LVR-IC	LDO, 2.6V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
6C	-	RP500N134A	DC-DC-IC	PWM step-down, 1.3V±24mV, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
6C	-	UN603	Si-pnp	Dual, 80V, 1A, 1W, 120MHz, B=120..340	SOP-6	33	T29	7b	Pan
6D	-	RP500N162A	DC-DC-IC	PWM step-down, 1.6V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
6E	-	RP500N164A	DC-DC-IC	PWM step-down, 1.6V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
6F	-	R1161D161B	LVR-IC	LDO, 1.6V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
6F	-	RP500N282A	DC-DC-IC	PWM step-down, 2.8V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
6G	-	R1161D261B	LVR-IC	LDO, 2.6V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
6G	-	RP500N301A	DC-DC-IC	PWM/VFM st-dwn, 3.0V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
6H	-	RP500N302A	DC-DC-IC	PWM step-down, 3.0V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
6J	-	RP500N304A	DC-DC-IC	PWM step-down, 3.0V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
6K	-	R1161D161D	LVR-IC	LDO, 1.6V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
6K	-	RP500N221A	DC-DC-IC	PWM/VFM st-dwn, 2.2V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
6L	-	R1161D261D	LVR-IC	LDO, 2.6V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
6L	-	RP500N311A	DC-DC-IC	PWM/VFM st-dwn, 3.1V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
6M	-	RP500N141A	DC-DC-IC	PWM/VFM st-dwn, 1.4V±24mV, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
6N	-	RP500N201A	DC-DC-IC	PWM/VFM st-dwn, 2.0V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
6O	-	UN604	Si-n/p+Di	Dual, 20V, 1.5A, 1W, 190MHz, B=200..700	SOP-6	33	T28	7b	Pan
6P	-	RP500N231A	DC-DC-IC	PWM/VFM st-dwn, 2.3V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
6Q	-	RP500N142A	DC-DC-IC	PWM step-down, 1.4V±24mV, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
6R	-	RP500N144A	DC-DC-IC	PWM step-down, 1.4V±24mV, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
6S	-	RP500N171A	DC-DC-IC	PWM/VFM st-dwn, 1.7V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
6T	-	RP500N172A	DC-DC-IC	PWM step-down, 1.7V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
6U	-	RP500N174A	DC-DC-IC	PWM step-down, 1.7V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
6V	-	RP500N191A	DC-DC-IC	PWM/VFM st-dwn, 1.9V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6W	-	RP500N192A	DC-DC-IC	PWM step-down, 1.9V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
6X	-	RP500N194A	DC-DC-IC	PWM step-down, 1.9V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
6Y	-	RP500N202A	DC-DC-IC	PWM step-down, 2.0V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
6Z	-	RP500N204A	DC-DC-IC	PWM step-down, 2.0V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
6Z	-	XP6111	Si-pnp-Digi	Dual, 50V, 100mA, 150mW, 80MHz, R1/R2=10k/10k	SMini6	33	TD8	7b	Pan
7	-	ECG006F-G	MMIC	Buff/amp, DC..5.5GHz, 15dB (1GHz, 50Ω)	SOT-363	33a1	A1	7j	Wjc
70	-	µPA801TC-FB	Si-npn	Dual, VHF/UHF, 20V, 100mA, 200mW, 4.5GHz, B=70..140	FTUSM-6	35	T2	7b	Nec
70-	-	BAS70XY	Si-diode	Quad, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33	D10	7b	NxH
7005	-	FAN7005M	Lin-IC	AF PA, 2.7..5.5V, 2x300mW(5V/8Ω), shutdown	SOP-8	47	AFP16	8d	F
701	-	TPA701D	Lin-IC	AF PA, BTL, 2.5..5.5V, 700mW(5V/8Ω), shutdown	SOP-8	47	AFP11	8d	Ti
70p	-	BAS70XY	Si-diode	Quad, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33	D10	7b	NxH
70t	-	BAS70XY	Si-diode	Quad, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33	D10	7b	NxM
70W	-	BAS70XY	Si-diode	Quad, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33	D10	7b	NxC
71	-	µPA801TC-GB	Si-npn	Dual, VHF/UHF, 20V, 100mA, 200mW, 4.5GHz, B=125..250	FTUSM-6	35	T2	7b	Nec
711	-	TPA711D	Lin-IC	AF PA, BTL, 2.5..5.5V, 700mW(5V/8Ω), shutdown	SOP-8	47	AFP23	8d	Ti
71C	-	TSH71CD	Op-IC	Wide-band, LP, St-by, ±5V, 70MHz	SOP-8	47	OP1	8c	Ste
71C	-	TSH71CPT	Op-IC	Wide-band LP, St-by, ±5V, 70MHz	TSSOP-8	47	OP1	8d	Ste
721	-	TPA721D	Lin-IC	AF PA, BTL, 2.5..5.5V, 700mW(5V/8Ω), shutdown	SOP-8	47	AFP11	8d	Ti
72C	-	TSH72CD	Op-IC	Dual, WB, LP, St-by, ±5V, 70MHz	SOP-8	47	OP1	8c	Ste
72C	-	TSH72CPT	Op-IC	Dual, WB, LP, St-by, ±5V, 70MHz	TSSOP-8	47	OP1	8d	Ste
73C	-	TSH73CD	Op-IC	Triple, WB, LP, St-by, ±5V, 70MHz	SOP-14	60	OP1	8d	Ste
73C	-	TSH73CPT	Op-IC	Triple, WB, LP, St-by, ±5V, 70MHz	TSSOP-14	60	OP1	7b	Ste
73T	-	µPA813T-FB	Si-npn	Dual, UHF, 9V, 100mA, 4.5GHz, B=40..80	SOT-363	33tf	T1	7b	Nec
74	-	BAT74S	Si-diode	Dual, Sw, 30V, 200mA, 230mW, Vf<0.8V(0.1A), <5ns	SOT-363	33de	-	7b	Phi
74	-	KIC7W74FK	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	US8	47	Log59	8c	Kec
74	-	XC74WL74AASR	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	MSOP-8B	a6	Log59	8d	Tor
74C	-	TSH74CD	Op-IC	Quad, WB, LP, St-by, ±5V, 70MHz	SOP-14	60	OP1	8d	Ste
74C	-	TSH74CPT	Op-IC	Quad, WB, LP, St-by, ±5V, 70MHz	TSSOP-14	60	OP1	7b	Ste
74s	-	BAS70-04S	Si-diode	Quad, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33	D10	7b	Inf
74T	-	µPA813T-GB	Si-npn	Dual, UHF, 9V, 100mA, 4.5GHz, B=70..140	SOT-363	33tf	T1	7b	Nec
75C	-	TSH75CD	Op-IC	Quad, WB, LP, St-by, ±5V, 70MHz	SOP-16	60	OP1	8d	Ste
75C	-	TSH75PT	Op-IC	Quad, WB, LP, St-by, ±5V, 70MHz	TSSOP-16	60	OP1	8d	Ste
76s	-	BAS70-06S	Si-diode	Quad, SBD, 70V, 70mA, Vf<1V(15mA), <100ps	SOT-363	33	D8	7l	Sie
77	-	BAS70-07V	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-666	35de	-	7b	Nxp
77-	-	BAS70-07S	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33de	-	7b	NxH
77p	-	BAS70-07S	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33de	-	7b	NxH
77t	-	BAS70-07S	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33de	-	7b	NxM
77W	-	BAS70-07S	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33de	-	7b	NxC
7A	-	MUN5211DW	Si-npn-Digi	Dual, Sw, 2x50V, 100mA, 200mW, R1/R2=10k/10k	SOT-363	33	TD3	7b	Mot
7B	-	MUN5212DW	Si-npn-Digi	Dual, Sw, 2x50V, 100mA, 200mW, R1/R2=22k/22k	SOT-363	33	TD3	7b	Mot
7B	-	R1161D171A	LVR-IC	LDO, 1.7V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
7C	-	MUN5213DW	Si-npn-Digi	Dual, Sw, 2x50V, 100mA, 200mW, R1/R2=47k/47k	SOT-363	33	TD3	7b	Mot
7C	-	R1161D271A	LVR-IC	LDO, 2.7V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
7D	-	MUN5214DW	Si-npn-Digi	Dual, Sw, 2x50V, 100mA, 200mW, R1/R2=10/47k	SOT-363	33	TD3	7b	Mot
7E	-	MUN5215DW	Si-npn-Digi	Dual, Sw, 2x50V, 100mA, 200mW, R1=10k	SOT-363	33	TD3	7b	Mot
7F	-	MUN5216DW	Si-npn-Digi	Dual, Sw, 2x50V, 100mA, 200mW, R1=4k7	SOT-363	33	TD3	7b	Mot
7F	-	R1161D171B	LVR-IC	LDO, 1.7V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
7G	-	MUN5230DW	Si-npn-Digi	Dual, Sw, 2x50V, 100mA, 200mW, R1/R2=1k/1k0	SOT-363	33	TD3	7b	Mot
7G	-	R1161D271B	LVR-IC	LDO, 2.7V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
7H	-	MUN5231DW	Si-npn-Digi	Dual, Sw, 2x50V, 100mA, 200mW, R1/R2=2k2/2k2	SOT-363	33	TD3	7b	Mot
7J	-	MUN5232DW	Si-npn-Digi	Dual, Sw, 2x50V, 100mA, 200mW, R1/R2=4k/4k7	SOT-363	33	TD3	7b	Mot
7K	-	MUN5233DW	Si-npn-Digi	Dual, Sw, 2x50V, 100mA, 200mW, R1/R2=4k7/47k	SOT-363	33	TD3	7b	Mot
7K	-	R1161D171D	LVR-IC	LDO, 1.7V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
7L	-	MUN5234DW	Si-npn-Digi	Dual, Sw, 2x50V, 100mA, 200mW, R1/R2=22k/47k	SOT-363	33	TD3	7b	Mot
7L	-	R1161D271D	LVR-IC	LDO, 2.7V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
7N	-	MUN5236DW	Si-npn-Digi	Dual, Sw, 2x50V, 100mA, 200mW, R1/R2=100k/100k	SOT-363	33	TD3	7b	Mot
7P	-	MUN5237DW	Si-npn-Digi	Dual, Sw, 2x50V, 100mA, 200mW, R1/R2=47k/22k	SOT-363	33	TD3	7b	Mot
80P	-	TK11280BM	LVR-IC	LDO, 8V±2%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
80Q	-	TK11380BM	LVR-IC	LDO, 8V±2%, 150mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
80R	-	TK11380CM	LVR-IC	LDO, 8V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
81	-	µPA821TC	Si-npn	Dual, VHF/UHF, LN, 20V, 100mA, 200mW, B=70..140, 4.5GHz	SMM-6	35	T3	7b	Nec
8115M	-	CS8115M	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3.3W(5V/8Ω), shutdown	MSOP-8	55	-	8d	Cme
8120M	-	CS8120M	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3.3W(5V/8Ω), shutdown	MSOP-8	55	AFP24	8d	Cme
82	-	MGA-82563	MMIC	GaAs amp, 0.1..6 GHz, 3V, 17dBm	SOT-363	33a1	A1	7b	Agi
83	-	µPA826TC	Si-npn	Dual, VHF/UHF, LN, 9V, 30mA, 180mW, B=75..150, 12GHz	SMM-6	35	T3	7b	Nec
8-5	-	1PS88SB48	Si-diode	Quad, SBD, Hi-Speed, 40V, 120mA, <5pF	SOT-363	33	D7	7b	NxH
86	-	XC74WL86AASR	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	MSOP-8B	a6	Log65	8d	Tor
87	-	µPA814TC	Si-npn	Dual, RF, 9V, 100mA, 200mW, B=80..160, 9GHz	SMM-6	33	T1	7b	Nec
87C	-	BZX84C8V7TW	Z-diode	Triple, 8.53..8.87V, Zzt=15Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
89	-	µPA840TC	Si-npn	Dual, VHF/UHF, 9(20)V, 30(65)mA, B=75..150, 12GHz	SMM-6	35	T3	7b	Nec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8A	-	R1161D081A	LVR-IC	LDO, 0.8V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
8A1T	-	CMKZ5221B	Z-diode	Triple, 2.280..2.520V, Izt=20mA, Zzt=30Ω, 200mW	SOT-363	33dd	-	7b	Cen
8ACT	-	CMKZ5226B	Z-diode	Triple, 3.135..3.465V, Izt=20mA, Zzt=28Ω, 200mW	SOT-363	33dd	-	7b	Cen
8B	-	R1161D181A	LVR-IC	LDO, 1.8V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
8B1T	-	CMKZ5222B	Z-diode	Triple, 2.375..2.625V, Izt=20mA, Zzt=30Ω, 200mW	SOT-363	33dd	-	7b	Cen
8BCT	-	CMKZ5227B	Z-diode	Triple, 3.420..3.780V, Izt=20mA, Zzt=24Ω, 200mW	SOT-363	33dd	-	7b	Cen
8C	-	R1161D281A	LVR-IC	LDO, 2.8V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
8C1T	-	CMKZ5223B	Z-diode	Triple, 2.565..2.835V, Izt=20mA, Zzt=30Ω, 200mW	SOT-363	33dd	-	7b	Cen
8CCT	-	CMKZ5228B	Z-diode	Triple, 3.705..4.095V, Izt=20mA, Zzt=23Ω, 200mW	SOT-363	33dd	-	7b	Cen
8D1T	-	CMKZ5224B	Z-diode	Triple, 2.660..2.940V, Izt=20mA, Zzt=30Ω, 200mW	SOT-363	33dd	-	7b	Cen
8DCT	-	CMKZ5229B	Z-diode	Triple, 4.085..4.515V, Izt=20mA, Zzt=22Ω, 200mW	SOT-363	33dd	-	7b	Cen
8E	-	R1161D081B	LVR-IC	LDO, 0.8V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
8E1T	-	CMKZ5225B	Z-diode	Triple, 2.850..3.150V, Izt=20mA, Zzt=29Ω, 200mW	SOT-363	33dd	-	7b	Cen
8ECT	-	CMKZ5230B	Z-diode	Triple, 4.465..4.935V, Izt=20mA, Zzt=19Ω, 200mW	SOT-363	33dd	-	7b	Cen
8F	-	R1161D181B	LVR-IC	LDO, 1.8V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
8FCT	-	CMKZ5231B	Z-diode	Triple, 4.845..5.335V, Izt=20mA, Zzt=17Ω, 200mW	SOT-363	33dd	-	7b	Cen
8G	-	R1161D281B	LVR-IC	LDO, 2.8V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
8GCT	-	CMKZ5232B	Z-diode	Triple, 5.320..5.880V, Izt=20mA, Zzt=11Ω, 200mW	SOT-363	33dd	-	7b	Cen
8HCT	-	CMKZ5233B	Z-diode	Triple, 5.700..6.300V, Izt=20mA, Zzt=7.0Ω, 200mW	SOT-363	33dd	-	7b	Cen
8J	-	R1161D081D	LVR-IC	LDO, 0.8V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
8JCT	-	CMKZ5234B	Z-diode	Triple, 5.890..6.510V, Izt=20mA, Zzt=7.0Ω, 200mW	SOT-363	33dd	-	7b	Cen
8K	-	R1161D181D	LVR-IC	LDO, 1.8V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
8KCT	-	CMKZ5235B	Z-diode	Triple, 6.460..7.140V, Izt=20mA, Zzt=5.0Ω, 200mW	SOT-363	33dd	-	7b	Cen
8L	-	R1161D281D	LVR-IC	LDO, 2.8V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
8L05A	-	MC78L05ABD	LVR-IC	Low Iq, 5V±1.5%, 100mA, -40..+125°C	SOP-8	47vb	VR1	8d	Ons
8L08A	-	MC78L08ABD	LVR-IC	Low Iq, 8V±1.5%, 100mA, -40..+125°C	SOP-8	47vb	VR1	8d	Ons
8L09A	-	MC78L09ABD	LVR-IC	Low Iq, 9V±1.5%, 100mA, -40..+125°C	SOP-8	47vb	VR1	8d	Ons
8L12A	-	MC78L12ABD	LVR-IC	Low Iq, 12V±1.5%, 100mA, -40..+125°C	SOP-8	47vb	VR1	8d	Ons
8L15A	-	MC78L15ABD	LVR-IC	Low Iq, 15V±1.5%, 100mA, -40..+125°C	SOP-8	47vb	VR1	8d	Ons
8LCT	-	CMKZ5236B	Z-diode	Triple, 7.125..7.875V, Izt=20mA, Zzt=6.0Ω, 200mW	SOT-363	33dd	-	7b	Cen
8MCT	-	CMKZ5237B	Z-diode	Triple, 7.790..8.610V, Izt=20mA, Zzt=8.0Ω, 200mW	SOT-363	33dd	-	7b	Cen
8NCT	-	CMKZ5238B	Z-diode	Triple, 8.265..9.135V, Izt=20mA, Zzt=8.0Ω, 200mW	SOT-363	33dd	-	7b	Cen
8p5	-	1PS88SB48	Si-diode	Quad, SBD, Hi-Speed, 40V, 120mA, <5pF	SOT-363	33	D7	7b	NxH
8PCT	-	CMKZ5239B	Z-diode	Triple, 8.645..9.555V, Izt=20mA, Zzt=10Ω, 200mW	SOT-363	33dd	-	7b	Cen
8QCT	-	CMKZ5240B	Z-diode	Triple, 9.50..10.50V, Izt=20mA, Zzt=17Ω, 200mW	SOT-363	33dd	-	7b	Cen
8RCT	-	CMKZ5241B	Z-diode	Triple, 10.45..11.55V, Izt=20mA, Zzt=22Ω, 200mW	SOT-363	33dd	-	7b	Cen
8SCT	-	CMKZ5242B	Z-diode	Triple, 11.40..12.60V, Izt=20mA, Zzt=30Ω, 200mW	SOT-363	33dd	-	7b	Cen
8t5	-	1PS88SB48	Si-diode	Quad, SBD, Hi-Speed, 40V, 120mA, <5pF	SOT-363	33	D7	7b	NxM
8TCT	-	CMKZ5243B	Z-diode	Triple, 12.35..13.65V, Izt=9.5mA, Zzt=13Ω, 200mW	SOT-363	33dd	-	7b	Cen
8UCT	-	CMKZ5244B	Z-diode	Triple, 13.30..14.70V, Izt=9.0mA, Zzt=15Ω, 200mW	SOT-363	33dd	-	7b	Cen
8VCT	-	CMKZ5245B	Z-diode	Triple, 14.25..15.75V, Izt=8.5mA, Zzt=16Ω, 200mW	SOT-363	33dd	-	7b	Cen
8W5	-	1PS88SB48	Si-diode	Quad, SBD, Hi-Speed, 40V, 120mA, <5pF	SOT-363	33	D7	7b	NxC
8WCT	-	CMKZ5246B	Z-diode	Triple, 15.20..16.80V, Izt=7.8mA, Zzt=17Ω, 200mW	SOT-363	33dd	-	7b	Cen
8XCT	-	CMKZ5247B	Z-diode	Triple, 16.15..17.85V, Izt=7.4mA, Zzt=19Ω, 200mW	SOT-363	33dd	-	7b	Cen
8YCT	-	CMKZ5248B	Z-diode	Triple, 17.10..18.90V, Izt=7.0mA, Zzt=21Ω, 200mW	SOT-363	33dd	-	7b	Cen
8ZCT	-	CMKZ5249B	Z-diode	Triple, 18.05..19.95V, Izt=6.6mA, Zzt=23Ω, 200mW	SOT-363	33dd	-	7b	Cen
99181181	-	ELM99181181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181182	-	ELM99181182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181183	-	ELM99181183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181191	-	ELM99181191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181192	-	ELM99181192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181193	-	ELM99181193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181201	-	ELM99181201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181202	-	ELM99181202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181203	-	ELM99181203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181211	-	ELM99181211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181212	-	ELM99181212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181213	-	ELM99181213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181221	-	ELM99181221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181222	-	ELM99181222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181223	-	ELM99181223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181231	-	ELM99181231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181232	-	ELM99181232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181233	-	ELM99181233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181241	-	ELM99181241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181242	-	ELM99181242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181243	-	ELM99181243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181251	-	ELM99181251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181252	-	ELM99181252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181253	-	ELM99181253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99181261	-	ELM99181261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181262	-	ELM99181262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181263	-	ELM99181263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181271	-	ELM99181271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181272	-	ELM99181272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181273	-	ELM99181273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181281	-	ELM99181281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181282	-	ELM99181282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181283	-	ELM99181283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181291	-	ELM99181291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181292	-	ELM99181292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181293	-	ELM99181293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181301	-	ELM99181301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181302	-	ELM99181302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181303	-	ELM99181303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181311	-	ELM99181311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181312	-	ELM99181312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181313	-	ELM99181313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181321	-	ELM99181321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181322	-	ELM99181322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181323	-	ELM99181323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181331	-	ELM99181331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181332	-	ELM99181332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181333	-	ELM99181333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181341	-	ELM99181341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181342	-	ELM99181342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181343	-	ELM99181343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181351	-	ELM99181351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181352	-	ELM99181352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181353	-	ELM99181353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181361	-	ELM99181361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181362	-	ELM99181362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181363	-	ELM99181363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181371	-	ELM99181371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181372	-	ELM99181372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181373	-	ELM99181373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181381	-	ELM99181381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181382	-	ELM99181382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181383	-	ELM99181383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181391	-	ELM99181391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181392	-	ELM99181392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181393	-	ELM99181393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181401	-	ELM99181401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181402	-	ELM99181402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181403	-	ELM99181403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181411	-	ELM99181411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181412	-	ELM99181412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181413	-	ELM99181413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181421	-	ELM99181421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181422	-	ELM99181422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181423	-	ELM99181423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181431	-	ELM99181431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181432	-	ELM99181432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181433	-	ELM99181433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181441	-	ELM99181441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181442	-	ELM99181442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181443	-	ELM99181443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181451	-	ELM99181451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181452	-	ELM99181452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181453	-	ELM99181453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181461	-	ELM99181461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181462	-	ELM99181462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181463	-	ELM99181463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181471	-	ELM99181471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181472	-	ELM99181472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181473	-	ELM99181473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181481	-	ELM99181481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181482	-	ELM99181482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181483	-	ELM99181483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181491	-	ELM99181491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99181492	-	ELM99181492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181493	-	ELM99181493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181501	-	ELM99181501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181502	-	ELM99181502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181503	-	ELM99181503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181511	-	ELM99181511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181512	-	ELM99181512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181513	-	ELM99181513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181521	-	ELM99181521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181522	-	ELM99181522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181523	-	ELM99181523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181531	-	ELM99181531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181532	-	ELM99181532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181533	-	ELM99181533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181541	-	ELM99181541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181542	-	ELM99181542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181543	-	ELM99181543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181551	-	ELM99181551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181552	-	ELM99181552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181553	-	ELM99181553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181561	-	ELM99181561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181562	-	ELM99181562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181563	-	ELM99181563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181571	-	ELM99181571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181572	-	ELM99181572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181573	-	ELM99181573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181581	-	ELM99181581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181582	-	ELM99181582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181583	-	ELM99181583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181591	-	ELM99181591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181592	-	ELM99181592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181593	-	ELM99181593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99181601	-	ELM99181601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99181602	-	ELM99181602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99181603	-	ELM99181603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99182181	-	ELM99182181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182182	-	ELM99182182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182183	-	ELM99182183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182191	-	ELM99182191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182192	-	ELM99182192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182193	-	ELM99182193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182201	-	ELM99182201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182202	-	ELM99182202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182203	-	ELM99182203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182211	-	ELM99182211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182212	-	ELM99182212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182213	-	ELM99182213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182221	-	ELM99182221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182222	-	ELM99182222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182223	-	ELM99182223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182231	-	ELM99182231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182232	-	ELM99182232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182233	-	ELM99182233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182241	-	ELM99182241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182242	-	ELM99182242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182243	-	ELM99182243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182251	-	ELM99182251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182252	-	ELM99182252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182253	-	ELM99182253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182261	-	ELM99182261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182262	-	ELM99182262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182263	-	ELM99182263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182271	-	ELM99182271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182272	-	ELM99182272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182273	-	ELM99182273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182281	-	ELM99182281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182282	-	ELM99182282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182283	-	ELM99182283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182291	-	ELM99182291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182292	-	ELM99182292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99182293	-	ELM99182293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182301	-	ELM99182301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182302	-	ELM99182302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182303	-	ELM99182303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182311	-	ELM99182311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182312	-	ELM99182312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182313	-	ELM99182313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182321	-	ELM99182321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182322	-	ELM99182322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182323	-	ELM99182323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182331	-	ELM99182331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182332	-	ELM99182332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182333	-	ELM99182333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182341	-	ELM99182341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182342	-	ELM99182342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182343	-	ELM99182343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182351	-	ELM99182351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182352	-	ELM99182352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182353	-	ELM99182353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182361	-	ELM99182361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182362	-	ELM99182362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182363	-	ELM99182363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182371	-	ELM99182371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182372	-	ELM99182372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182373	-	ELM99182373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182381	-	ELM99182381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182382	-	ELM99182382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182383	-	ELM99182383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182391	-	ELM99182391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182392	-	ELM99182392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182393	-	ELM99182393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182401	-	ELM99182401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182402	-	ELM99182402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182403	-	ELM99182403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182411	-	ELM99182411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182412	-	ELM99182412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182413	-	ELM99182413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182421	-	ELM99182421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182422	-	ELM99182422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182423	-	ELM99182423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182431	-	ELM99182431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182432	-	ELM99182432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182433	-	ELM99182433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182441	-	ELM99182441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182442	-	ELM99182442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182443	-	ELM99182443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182451	-	ELM99182451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182452	-	ELM99182452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182453	-	ELM99182453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182461	-	ELM99182461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182462	-	ELM99182462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182463	-	ELM99182463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182471	-	ELM99182471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182472	-	ELM99182472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182473	-	ELM99182473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182481	-	ELM99182481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182482	-	ELM99182482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182483	-	ELM99182483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182491	-	ELM99182491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182492	-	ELM99182492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182493	-	ELM99182493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182501	-	ELM99182501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182502	-	ELM99182502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182503	-	ELM99182503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182511	-	ELM99182511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182512	-	ELM99182512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182513	-	ELM99182513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182521	-	ELM99182521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182522	-	ELM99182522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182523	-	ELM99182523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99182531	-	ELM99182531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182532	-	ELM99182532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182533	-	ELM99182533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182541	-	ELM99182541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182542	-	ELM99182542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182543	-	ELM99182543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182551	-	ELM99182551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182552	-	ELM99182552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182553	-	ELM99182553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182561	-	ELM99182561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182562	-	ELM99182562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182563	-	ELM99182563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182571	-	ELM99182571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182572	-	ELM99182572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182573	-	ELM99182573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182581	-	ELM99182581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182582	-	ELM99182582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182583	-	ELM99182583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182591	-	ELM99182591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182592	-	ELM99182592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182593	-	ELM99182593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99182601	-	ELM99182601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99182602	-	ELM99182602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99182603	-	ELM99182603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183181	-	ELM99183181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183182	-	ELM99183182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183183	-	ELM99183183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183191	-	ELM99183191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183192	-	ELM99183192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183193	-	ELM99183193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183201	-	ELM99183201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183202	-	ELM99183202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183203	-	ELM99183203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183211	-	ELM99183211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183212	-	ELM99183212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183213	-	ELM99183213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183221	-	ELM99183221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183222	-	ELM99183222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183223	-	ELM99183223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183231	-	ELM99183231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183232	-	ELM99183232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183233	-	ELM99183233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183241	-	ELM99183241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183242	-	ELM99183242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183243	-	ELM99183243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183251	-	ELM99183251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183252	-	ELM99183252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183253	-	ELM99183253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183261	-	ELM99183261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183262	-	ELM99183262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183263	-	ELM99183263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183271	-	ELM99183271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183272	-	ELM99183272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183273	-	ELM99183273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183281	-	ELM99183281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183282	-	ELM99183282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183283	-	ELM99183283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183291	-	ELM99183291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183292	-	ELM99183292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183293	-	ELM99183293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183301	-	ELM99183301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183302	-	ELM99183302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183303	-	ELM99183303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183311	-	ELM99183311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183312	-	ELM99183312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183313	-	ELM99183313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183321	-	ELM99183321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183322	-	ELM99183322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183323	-	ELM99183323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183331	-	ELM99183331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99183332	-	ELM99183332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183333	-	ELM99183333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183341	-	ELM99183341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183342	-	ELM99183342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183343	-	ELM99183343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183351	-	ELM99183351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183352	-	ELM99183352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183353	-	ELM99183353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183361	-	ELM99183361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183362	-	ELM99183362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183363	-	ELM99183363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183371	-	ELM99183371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183372	-	ELM99183372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183373	-	ELM99183373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183381	-	ELM99183381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183382	-	ELM99183382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183383	-	ELM99183383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183391	-	ELM99183391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183392	-	ELM99183392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183393	-	ELM99183393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183401	-	ELM99183401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183402	-	ELM99183402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183403	-	ELM99183403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183411	-	ELM99183411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183412	-	ELM99183412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183413	-	ELM99183413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183421	-	ELM99183421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183422	-	ELM99183422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183423	-	ELM99183423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183431	-	ELM99183431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183432	-	ELM99183432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183433	-	ELM99183433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183441	-	ELM99183441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183442	-	ELM99183442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183443	-	ELM99183443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183451	-	ELM99183451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183452	-	ELM99183452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183453	-	ELM99183453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183461	-	ELM99183461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183462	-	ELM99183462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183463	-	ELM99183463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183471	-	ELM99183471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183472	-	ELM99183472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183473	-	ELM99183473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183481	-	ELM99183481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183482	-	ELM99183482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183483	-	ELM99183483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183491	-	ELM99183491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183492	-	ELM99183492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183493	-	ELM99183493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183501	-	ELM99183501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183502	-	ELM99183502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183503	-	ELM99183503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183511	-	ELM99183511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183512	-	ELM99183512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183513	-	ELM99183513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183521	-	ELM99183521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183522	-	ELM99183522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183523	-	ELM99183523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183531	-	ELM99183531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183532	-	ELM99183532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183533	-	ELM99183533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183541	-	ELM99183541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183542	-	ELM99183542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183543	-	ELM99183543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183551	-	ELM99183551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183552	-	ELM99183552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183553	-	ELM99183553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183561	-	ELM99183561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183562	-	ELM99183562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99183563	-	ELM99183563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183571	-	ELM99183571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183572	-	ELM99183572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183573	-	ELM99183573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183581	-	ELM99183581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183582	-	ELM99183582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183583	-	ELM99183583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183591	-	ELM99183591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183592	-	ELM99183592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183593	-	ELM99183593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99183601	-	ELM99183601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99183602	-	ELM99183602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99183603	-	ELM99183603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99191181	-	ELM99191181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191182	-	ELM99191182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191183	-	ELM99191183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191191	-	ELM99191191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191192	-	ELM99191192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191193	-	ELM99191193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191201	-	ELM99191201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191202	-	ELM99191202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191203	-	ELM99191203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191211	-	ELM99191211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191212	-	ELM99191212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191213	-	ELM99191213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191221	-	ELM99191221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191222	-	ELM99191222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191223	-	ELM99191223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191231	-	ELM99191231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191232	-	ELM99191232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191233	-	ELM99191233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191241	-	ELM99191241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191242	-	ELM99191242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191243	-	ELM99191243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191251	-	ELM99191251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191252	-	ELM99191252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191253	-	ELM99191253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191261	-	ELM99191261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191262	-	ELM99191262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191263	-	ELM99191263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191271	-	ELM99191271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191272	-	ELM99191272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191273	-	ELM99191273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191281	-	ELM99191281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191282	-	ELM99191282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191283	-	ELM99191283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191291	-	ELM99191291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191292	-	ELM99191292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191293	-	ELM99191293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191301	-	ELM99191301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191302	-	ELM99191302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191303	-	ELM99191303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191311	-	ELM99191311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191312	-	ELM99191312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191313	-	ELM99191313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191321	-	ELM99191321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191322	-	ELM99191322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191323	-	ELM99191323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191331	-	ELM99191331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191332	-	ELM99191332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191333	-	ELM99191333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191341	-	ELM99191341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191342	-	ELM99191342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191343	-	ELM99191343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191351	-	ELM99191351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191352	-	ELM99191352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191353	-	ELM99191353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191361	-	ELM99191361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191362	-	ELM99191362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191363	-	ELM99191363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99191371	-	ELM99191371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191372	-	ELM99191372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191373	-	ELM99191373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191381	-	ELM99191381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191382	-	ELM99191382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191383	-	ELM99191383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191391	-	ELM99191391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191392	-	ELM99191392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191393	-	ELM99191393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191401	-	ELM99191401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191402	-	ELM99191402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191403	-	ELM99191403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191411	-	ELM99191411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191412	-	ELM99191412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191413	-	ELM99191413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191421	-	ELM99191421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191422	-	ELM99191422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191423	-	ELM99191423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191431	-	ELM99191431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191432	-	ELM99191432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191433	-	ELM99191433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191441	-	ELM99191441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191442	-	ELM99191442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191443	-	ELM99191443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191451	-	ELM99191451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191452	-	ELM99191452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191453	-	ELM99191453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191461	-	ELM99191461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191462	-	ELM99191462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191463	-	ELM99191463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191471	-	ELM99191471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191472	-	ELM99191472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191473	-	ELM99191473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191481	-	ELM99191481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191482	-	ELM99191482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191483	-	ELM99191483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191491	-	ELM99191491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191492	-	ELM99191492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191493	-	ELM99191493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191501	-	ELM99191501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191502	-	ELM99191502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191503	-	ELM99191503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191511	-	ELM99191511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191512	-	ELM99191512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191513	-	ELM99191513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191521	-	ELM99191521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191522	-	ELM99191522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191523	-	ELM99191523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191531	-	ELM99191531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191532	-	ELM99191532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191533	-	ELM99191533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191541	-	ELM99191541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191542	-	ELM99191542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191543	-	ELM99191543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191551	-	ELM99191551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191552	-	ELM99191552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191553	-	ELM99191553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191561	-	ELM99191561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191562	-	ELM99191562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191563	-	ELM99191563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191571	-	ELM99191571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191572	-	ELM99191572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191573	-	ELM99191573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191581	-	ELM99191581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191582	-	ELM99191582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191583	-	ELM99191583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191591	-	ELM99191591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99191592	-	ELM99191592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191593	-	ELM99191593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99191601	-	ELM99191601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99191602	-	ELM99191602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99191603	-	ELM99191603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99192181	-	ELM99192181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192182	-	ELM99192182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192183	-	ELM99192183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192191	-	ELM99192191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192192	-	ELM99192192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192193	-	ELM99192193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192201	-	ELM99192201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192202	-	ELM99192202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192203	-	ELM99192203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192211	-	ELM99192211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192212	-	ELM99192212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192213	-	ELM99192213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192221	-	ELM99192221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192222	-	ELM99192222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192223	-	ELM99192223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192231	-	ELM99192231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192232	-	ELM99192232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192233	-	ELM99192233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192241	-	ELM99192241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192242	-	ELM99192242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192243	-	ELM99192243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192251	-	ELM99192251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192252	-	ELM99192252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192253	-	ELM99192253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192261	-	ELM99192261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192262	-	ELM99192262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192263	-	ELM99192263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192271	-	ELM99192271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192272	-	ELM99192272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192273	-	ELM99192273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192281	-	ELM99192281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192282	-	ELM99192282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192283	-	ELM99192283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192291	-	ELM99192291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192292	-	ELM99192292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192293	-	ELM99192293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192301	-	ELM99192301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192302	-	ELM99192302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192303	-	ELM99192303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192311	-	ELM99192311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192312	-	ELM99192312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192313	-	ELM99192313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192321	-	ELM99192321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192322	-	ELM99192322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192323	-	ELM99192323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192331	-	ELM99192331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192332	-	ELM99192332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192333	-	ELM99192333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192341	-	ELM99192341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192342	-	ELM99192342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192343	-	ELM99192343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192351	-	ELM99192351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192352	-	ELM99192352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192353	-	ELM99192353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192361	-	ELM99192361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192362	-	ELM99192362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192363	-	ELM99192363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192371	-	ELM99192371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192372	-	ELM99192372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192373	-	ELM99192373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192381	-	ELM99192381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192382	-	ELM99192382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192383	-	ELM99192383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192391	-	ELM99192391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192392	-	ELM99192392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192393	-	ELM99192393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192401	-	ELM99192401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192402	-	ELM99192402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99192403	-	ELM99192403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192411	-	ELM99192411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192412	-	ELM99192412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192413	-	ELM99192413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192421	-	ELM99192421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192422	-	ELM99192422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192423	-	ELM99192423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192431	-	ELM99192431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192432	-	ELM99192432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192433	-	ELM99192433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192441	-	ELM99192441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192442	-	ELM99192442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192443	-	ELM99192443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192451	-	ELM99192451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192452	-	ELM99192452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192453	-	ELM99192453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192461	-	ELM99192461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192462	-	ELM99192462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192463	-	ELM99192463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192471	-	ELM99192471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192472	-	ELM99192472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192473	-	ELM99192473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192481	-	ELM99192481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192482	-	ELM99192482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192483	-	ELM99192483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192491	-	ELM99192491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192492	-	ELM99192492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192493	-	ELM99192493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192501	-	ELM99192501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192502	-	ELM99192502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192503	-	ELM99192503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192511	-	ELM99192511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192512	-	ELM99192512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192513	-	ELM99192513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192521	-	ELM99192521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192522	-	ELM99192522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192523	-	ELM99192523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192531	-	ELM99192531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192532	-	ELM99192532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192533	-	ELM99192533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192541	-	ELM99192541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192542	-	ELM99192542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192543	-	ELM99192543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192551	-	ELM99192551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192552	-	ELM99192552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192553	-	ELM99192553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192561	-	ELM99192561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192562	-	ELM99192562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192563	-	ELM99192563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192571	-	ELM99192571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192572	-	ELM99192572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192573	-	ELM99192573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192581	-	ELM99192581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192582	-	ELM99192582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192583	-	ELM99192583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192591	-	ELM99192591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192592	-	ELM99192592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192593	-	ELM99192593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99192601	-	ELM99192601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99192602	-	ELM99192602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99192603	-	ELM99192603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193181	-	ELM99193181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193182	-	ELM99193182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193183	-	ELM99193183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193191	-	ELM99193191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193192	-	ELM99193192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193193	-	ELM99193193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193201	-	ELM99193201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193202	-	ELM99193202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193203	-	ELM99193203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99193211	-	ELM99193211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193212	-	ELM99193212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193213	-	ELM99193213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193221	-	ELM99193221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193222	-	ELM99193222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193223	-	ELM99193223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193231	-	ELM99193231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193232	-	ELM99193232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193233	-	ELM99193233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193241	-	ELM99193241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193242	-	ELM99193242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193243	-	ELM99193243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193251	-	ELM99193251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193252	-	ELM99193252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193253	-	ELM99193253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193261	-	ELM99193261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193262	-	ELM99193262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193263	-	ELM99193263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193271	-	ELM99193271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193272	-	ELM99193272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193273	-	ELM99193273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193281	-	ELM99193281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193282	-	ELM99193282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193283	-	ELM99193283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193291	-	ELM99193291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193292	-	ELM99193292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193293	-	ELM99193293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193301	-	ELM99193301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193302	-	ELM99193302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193303	-	ELM99193303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193311	-	ELM99193311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193312	-	ELM99193312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193313	-	ELM99193313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193321	-	ELM99193321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193322	-	ELM99193322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193323	-	ELM99193323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193331	-	ELM99193331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193332	-	ELM99193332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193333	-	ELM99193333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193341	-	ELM99193341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193342	-	ELM99193342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193343	-	ELM99193343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193351	-	ELM99193351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193352	-	ELM99193352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193353	-	ELM99193353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193361	-	ELM99193361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193362	-	ELM99193362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193363	-	ELM99193363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193371	-	ELM99193371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193372	-	ELM99193372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193373	-	ELM99193373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193381	-	ELM99193381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193382	-	ELM99193382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193383	-	ELM99193383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193391	-	ELM99193391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193392	-	ELM99193392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193393	-	ELM99193393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193401	-	ELM99193401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193402	-	ELM99193402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193403	-	ELM99193403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193411	-	ELM99193411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193412	-	ELM99193412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193413	-	ELM99193413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193421	-	ELM99193421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193422	-	ELM99193422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193423	-	ELM99193423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193431	-	ELM99193431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193432	-	ELM99193432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193433	-	ELM99193433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193441	-	ELM99193441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99193442	-	ELM99193442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193443	-	ELM99193443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193451	-	ELM99193451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193452	-	ELM99193452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193453	-	ELM99193453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193461	-	ELM99193461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193462	-	ELM99193462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193463	-	ELM99193463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193471	-	ELM99193471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193472	-	ELM99193472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193473	-	ELM99193473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193481	-	ELM99193481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193482	-	ELM99193482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193483	-	ELM99193483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193491	-	ELM99193491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193492	-	ELM99193492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193493	-	ELM99193493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193501	-	ELM99193501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193502	-	ELM99193502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193503	-	ELM99193503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193511	-	ELM99193511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193512	-	ELM99193512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193513	-	ELM99193513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193521	-	ELM99193521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193522	-	ELM99193522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193523	-	ELM99193523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193531	-	ELM99193531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193532	-	ELM99193532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193533	-	ELM99193533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193541	-	ELM99193541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193542	-	ELM99193542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193543	-	ELM99193543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193551	-	ELM99193551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193552	-	ELM99193552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193553	-	ELM99193553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193561	-	ELM99193561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193562	-	ELM99193562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193563	-	ELM99193563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193571	-	ELM99193571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193572	-	ELM99193572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193573	-	ELM99193573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193581	-	ELM99193581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193582	-	ELM99193582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193583	-	ELM99193583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193591	-	ELM99193591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193592	-	ELM99193592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193593	-	ELM99193593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99193601	-	ELM99193601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99193602	-	ELM99193602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99193603	-	ELM99193603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99201181	-	ELM99201181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201182	-	ELM99201182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201183	-	ELM99201183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201191	-	ELM99201191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201192	-	ELM99201192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201193	-	ELM99201193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201201	-	ELM99201201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201202	-	ELM99201202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201203	-	ELM99201203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201211	-	ELM99201211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201212	-	ELM99201212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201213	-	ELM99201213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201221	-	ELM99201221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201222	-	ELM99201222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201223	-	ELM99201223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201231	-	ELM99201231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201232	-	ELM99201232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201233	-	ELM99201233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201241	-	ELM99201241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201242	-	ELM99201242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99201243	-	ELM99201243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201251	-	ELM99201251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201252	-	ELM99201252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201253	-	ELM99201253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201261	-	ELM99201261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201262	-	ELM99201262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201263	-	ELM99201263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201271	-	ELM99201271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201272	-	ELM99201272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201273	-	ELM99201273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201281	-	ELM99201281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201282	-	ELM99201282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201283	-	ELM99201283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201291	-	ELM99201291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201292	-	ELM99201292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201293	-	ELM99201293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201301	-	ELM99201301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201302	-	ELM99201302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201303	-	ELM99201303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201311	-	ELM99201311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201312	-	ELM99201312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201313	-	ELM99201313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201321	-	ELM99201321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201322	-	ELM99201322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201323	-	ELM99201323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201331	-	ELM99201331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201332	-	ELM99201332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201333	-	ELM99201333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201341	-	ELM99201341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201342	-	ELM99201342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201343	-	ELM99201343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201351	-	ELM99201351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201352	-	ELM99201352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201353	-	ELM99201353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201361	-	ELM99201361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201362	-	ELM99201362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201363	-	ELM99201363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201371	-	ELM99201371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201372	-	ELM99201372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201373	-	ELM99201373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201381	-	ELM99201381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201382	-	ELM99201382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201383	-	ELM99201383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201391	-	ELM99201391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201392	-	ELM99201392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201393	-	ELM99201393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201401	-	ELM99201401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201402	-	ELM99201402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201403	-	ELM99201403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201411	-	ELM99201411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201412	-	ELM99201412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201413	-	ELM99201413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201421	-	ELM99201421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201422	-	ELM99201422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201423	-	ELM99201423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201431	-	ELM99201431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201432	-	ELM99201432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201433	-	ELM99201433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201441	-	ELM99201441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201442	-	ELM99201442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201443	-	ELM99201443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201451	-	ELM99201451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201452	-	ELM99201452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201453	-	ELM99201453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201461	-	ELM99201461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201462	-	ELM99201462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201463	-	ELM99201463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201471	-	ELM99201471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201472	-	ELM99201472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201473	-	ELM99201473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99201481	-	ELM99201481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201482	-	ELM99201482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201483	-	ELM99201483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201491	-	ELM99201491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201492	-	ELM99201492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201493	-	ELM99201493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201501	-	ELM99201501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201502	-	ELM99201502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201503	-	ELM99201503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201511	-	ELM99201511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201512	-	ELM99201512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201513	-	ELM99201513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201521	-	ELM99201521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201522	-	ELM99201522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201523	-	ELM99201523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201531	-	ELM99201531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201532	-	ELM99201532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201533	-	ELM99201533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201541	-	ELM99201541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201542	-	ELM99201542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201543	-	ELM99201543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201551	-	ELM99201551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201552	-	ELM99201552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201553	-	ELM99201553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201561	-	ELM99201561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201562	-	ELM99201562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201563	-	ELM99201563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201571	-	ELM99201571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201572	-	ELM99201572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201573	-	ELM99201573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201581	-	ELM99201581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201582	-	ELM99201582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201583	-	ELM99201583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201591	-	ELM99201591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201592	-	ELM99201592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201593	-	ELM99201593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99201601	-	ELM99201601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99201602	-	ELM99201602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99201603	-	ELM99201603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99202181	-	ELM99202181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202182	-	ELM99202182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202183	-	ELM99202183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202191	-	ELM99202191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202192	-	ELM99202192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202193	-	ELM99202193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202201	-	ELM99202201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202202	-	ELM99202202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202203	-	ELM99202203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202211	-	ELM99202211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202212	-	ELM99202212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202213	-	ELM99202213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202221	-	ELM99202221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202222	-	ELM99202222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202223	-	ELM99202223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202231	-	ELM99202231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202232	-	ELM99202232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202233	-	ELM99202233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202241	-	ELM99202241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202242	-	ELM99202242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202243	-	ELM99202243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202251	-	ELM99202251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202252	-	ELM99202252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202253	-	ELM99202253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202261	-	ELM99202261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202262	-	ELM99202262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202263	-	ELM99202263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202271	-	ELM99202271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202272	-	ELM99202272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202273	-	ELM99202273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202281	-	ELM99202281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99202282	-	ELM99202282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202283	-	ELM99202283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202291	-	ELM99202291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202292	-	ELM99202292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202293	-	ELM99202293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202301	-	ELM99202301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202302	-	ELM99202302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202303	-	ELM99202303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202311	-	ELM99202311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202312	-	ELM99202312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202313	-	ELM99202313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202321	-	ELM99202321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202322	-	ELM99202322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202323	-	ELM99202323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202331	-	ELM99202331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202332	-	ELM99202332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202333	-	ELM99202333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202341	-	ELM99202341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202342	-	ELM99202342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202343	-	ELM99202343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202351	-	ELM99202351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202352	-	ELM99202352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202353	-	ELM99202353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202361	-	ELM99202361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202362	-	ELM99202362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202363	-	ELM99202363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202371	-	ELM99202371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202372	-	ELM99202372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202373	-	ELM99202373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202381	-	ELM99202381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202382	-	ELM99202382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202383	-	ELM99202383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202391	-	ELM99202391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202392	-	ELM99202392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202393	-	ELM99202393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202401	-	ELM99202401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202402	-	ELM99202402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202403	-	ELM99202403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202411	-	ELM99202411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202412	-	ELM99202412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202413	-	ELM99202413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202421	-	ELM99202421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202422	-	ELM99202422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202423	-	ELM99202423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202431	-	ELM99202431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202432	-	ELM99202432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202433	-	ELM99202433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202441	-	ELM99202441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202442	-	ELM99202442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202443	-	ELM99202443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202451	-	ELM99202451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202452	-	ELM99202452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202453	-	ELM99202453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202461	-	ELM99202461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202462	-	ELM99202462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202463	-	ELM99202463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202471	-	ELM99202471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202472	-	ELM99202472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202473	-	ELM99202473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202481	-	ELM99202481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202482	-	ELM99202482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202483	-	ELM99202483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202491	-	ELM99202491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202492	-	ELM99202492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202493	-	ELM99202493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202501	-	ELM99202501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202502	-	ELM99202502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202503	-	ELM99202503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202511	-	ELM99202511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202512	-	ELM99202512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99202513	-	ELM99202513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202521	-	ELM99202521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202522	-	ELM99202522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202523	-	ELM99202523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202531	-	ELM99202531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202532	-	ELM99202532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202533	-	ELM99202533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202541	-	ELM99202541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202542	-	ELM99202542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202543	-	ELM99202543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202551	-	ELM99202551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202552	-	ELM99202552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202553	-	ELM99202553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202561	-	ELM99202561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202562	-	ELM99202562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202563	-	ELM99202563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202571	-	ELM99202571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202572	-	ELM99202572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202573	-	ELM99202573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202581	-	ELM99202581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202582	-	ELM99202582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202583	-	ELM99202583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202591	-	ELM99202591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202592	-	ELM99202592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202593	-	ELM99202593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99202601	-	ELM99202601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99202602	-	ELM99202602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99202603	-	ELM99202603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203181	-	ELM99203181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203182	-	ELM99203182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203183	-	ELM99203183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203191	-	ELM99203191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203192	-	ELM99203192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203193	-	ELM99203193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203201	-	ELM99203201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203202	-	ELM99203202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203203	-	ELM99203203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203211	-	ELM99203211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203212	-	ELM99203212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203213	-	ELM99203213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203221	-	ELM99203221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203222	-	ELM99203222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203223	-	ELM99203223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203231	-	ELM99203231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203232	-	ELM99203232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203233	-	ELM99203233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203241	-	ELM99203241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203242	-	ELM99203242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203243	-	ELM99203243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203251	-	ELM99203251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203252	-	ELM99203252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203253	-	ELM99203253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203261	-	ELM99203261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203262	-	ELM99203262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203263	-	ELM99203263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203271	-	ELM99203271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203272	-	ELM99203272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203273	-	ELM99203273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203281	-	ELM99203281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203282	-	ELM99203282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203283	-	ELM99203283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203291	-	ELM99203291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203292	-	ELM99203292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203293	-	ELM99203293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203301	-	ELM99203301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203302	-	ELM99203302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203303	-	ELM99203303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203311	-	ELM99203311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203312	-	ELM99203312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203313	-	ELM99203313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99203321	-	ELM99203321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203322	-	ELM99203322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203323	-	ELM99203323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203331	-	ELM99203331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203332	-	ELM99203332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203333	-	ELM99203333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203341	-	ELM99203341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203342	-	ELM99203342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203343	-	ELM99203343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203351	-	ELM99203351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203352	-	ELM99203352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203353	-	ELM99203353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203361	-	ELM99203361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203362	-	ELM99203362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203363	-	ELM99203363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203371	-	ELM99203371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203372	-	ELM99203372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203373	-	ELM99203373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203381	-	ELM99203381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203382	-	ELM99203382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203383	-	ELM99203383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203391	-	ELM99203391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203392	-	ELM99203392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203393	-	ELM99203393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203401	-	ELM99203401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203402	-	ELM99203402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203403	-	ELM99203403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203411	-	ELM99203411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203412	-	ELM99203412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203413	-	ELM99203413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203421	-	ELM99203421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203422	-	ELM99203422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203423	-	ELM99203423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203431	-	ELM99203431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203432	-	ELM99203432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203433	-	ELM99203433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203441	-	ELM99203441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203442	-	ELM99203442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203443	-	ELM99203443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203451	-	ELM99203451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203452	-	ELM99203452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203453	-	ELM99203453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203461	-	ELM99203461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203462	-	ELM99203462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203463	-	ELM99203463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203471	-	ELM99203471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203472	-	ELM99203472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203473	-	ELM99203473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203481	-	ELM99203481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203482	-	ELM99203482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203483	-	ELM99203483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203491	-	ELM99203491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203492	-	ELM99203492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203493	-	ELM99203493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203501	-	ELM99203501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203502	-	ELM99203502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203503	-	ELM99203503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203511	-	ELM99203511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203512	-	ELM99203512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203513	-	ELM99203513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203521	-	ELM99203521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203522	-	ELM99203522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203523	-	ELM99203523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203531	-	ELM99203531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203532	-	ELM99203532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203533	-	ELM99203533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203541	-	ELM99203541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203542	-	ELM99203542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203543	-	ELM99203543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203551	-	ELM99203551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99203552	-	ELM99203552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203553	-	ELM99203553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203561	-	ELM99203561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203562	-	ELM99203562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203563	-	ELM99203563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203571	-	ELM99203571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203572	-	ELM99203572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203573	-	ELM99203573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203581	-	ELM99203581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203582	-	ELM99203582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203583	-	ELM99203583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203591	-	ELM99203591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203592	-	ELM99203592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203593	-	ELM99203593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99203601	-	ELM99203601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99203602	-	ELM99203602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99203603	-	ELM99203603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99211181	-	ELM99211181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211182	-	ELM99211182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211183	-	ELM99211183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211191	-	ELM99211191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211192	-	ELM99211192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211193	-	ELM99211193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211201	-	ELM99211201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211202	-	ELM99211202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211203	-	ELM99211203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211211	-	ELM99211211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211212	-	ELM99211212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211213	-	ELM99211213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211221	-	ELM99211221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211222	-	ELM99211222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211223	-	ELM99211223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211231	-	ELM99211231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211232	-	ELM99211232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211233	-	ELM99211233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211241	-	ELM99211241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211242	-	ELM99211242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211243	-	ELM99211243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211251	-	ELM99211251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211252	-	ELM99211252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211253	-	ELM99211253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211261	-	ELM99211261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211262	-	ELM99211262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211263	-	ELM99211263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211271	-	ELM99211271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211272	-	ELM99211272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211273	-	ELM99211273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211281	-	ELM99211281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211282	-	ELM99211282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211283	-	ELM99211283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211291	-	ELM99211291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211292	-	ELM99211292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211293	-	ELM99211293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211301	-	ELM99211301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211302	-	ELM99211302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211303	-	ELM99211303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211311	-	ELM99211311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211312	-	ELM99211312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211313	-	ELM99211313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211321	-	ELM99211321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211322	-	ELM99211322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211323	-	ELM99211323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211331	-	ELM99211331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211332	-	ELM99211332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211333	-	ELM99211333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211341	-	ELM99211341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211342	-	ELM99211342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211343	-	ELM99211343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211351	-	ELM99211351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211352	-	ELM99211352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99211353	-	ELM99211353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211361	-	ELM99211361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211362	-	ELM99211362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211363	-	ELM99211363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211371	-	ELM99211371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211372	-	ELM99211372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211373	-	ELM99211373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211381	-	ELM99211381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211382	-	ELM99211382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211383	-	ELM99211383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211391	-	ELM99211391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211392	-	ELM99211392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211393	-	ELM99211393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211401	-	ELM99211401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211402	-	ELM99211402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211403	-	ELM99211403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211411	-	ELM99211411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211412	-	ELM99211412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211413	-	ELM99211413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211421	-	ELM99211421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211422	-	ELM99211422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211423	-	ELM99211423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211431	-	ELM99211431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211432	-	ELM99211432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211433	-	ELM99211433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211441	-	ELM99211441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211442	-	ELM99211442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211443	-	ELM99211443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211451	-	ELM99211451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211452	-	ELM99211452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211453	-	ELM99211453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211461	-	ELM99211461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211462	-	ELM99211462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211463	-	ELM99211463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211471	-	ELM99211471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211472	-	ELM99211472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211473	-	ELM99211473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211481	-	ELM99211481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211482	-	ELM99211482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211483	-	ELM99211483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211491	-	ELM99211491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211492	-	ELM99211492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211493	-	ELM99211493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211501	-	ELM99211501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211502	-	ELM99211502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211503	-	ELM99211503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211511	-	ELM99211511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211512	-	ELM99211512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211513	-	ELM99211513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211521	-	ELM99211521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211522	-	ELM99211522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211523	-	ELM99211523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211531	-	ELM99211531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211532	-	ELM99211532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211533	-	ELM99211533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211541	-	ELM99211541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211542	-	ELM99211542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211543	-	ELM99211543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211551	-	ELM99211551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211552	-	ELM99211552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211553	-	ELM99211553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211561	-	ELM99211561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211562	-	ELM99211562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211563	-	ELM99211563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211571	-	ELM99211571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211572	-	ELM99211572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211573	-	ELM99211573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211581	-	ELM99211581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211582	-	ELM99211582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211583	-	ELM99211583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99211591	-	ELM99211591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211592	-	ELM99211592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211593	-	ELM99211593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99211601	-	ELM99211601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99211602	-	ELM99211602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99211603	-	ELM99211603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99212181	-	ELM99212181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212182	-	ELM99212182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212183	-	ELM99212183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212191	-	ELM99212191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212192	-	ELM99212192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212193	-	ELM99212193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212201	-	ELM99212201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212202	-	ELM99212202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212203	-	ELM99212203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212211	-	ELM99212211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212212	-	ELM99212212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212213	-	ELM99212213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212221	-	ELM99212221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212222	-	ELM99212222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212223	-	ELM99212223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212231	-	ELM99212231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212232	-	ELM99212232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212233	-	ELM99212233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212241	-	ELM99212241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212242	-	ELM99212242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212243	-	ELM99212243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212251	-	ELM99212251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212252	-	ELM99212252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212253	-	ELM99212253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212261	-	ELM99212261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212262	-	ELM99212262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212263	-	ELM99212263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212271	-	ELM99212271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212272	-	ELM99212272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212273	-	ELM99212273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212281	-	ELM99212281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212282	-	ELM99212282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212283	-	ELM99212283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212291	-	ELM99212291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212292	-	ELM99212292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212293	-	ELM99212293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212301	-	ELM99212301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212302	-	ELM99212302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212303	-	ELM99212303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212311	-	ELM99212311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212312	-	ELM99212312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212313	-	ELM99212313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212321	-	ELM99212321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212322	-	ELM99212322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212323	-	ELM99212323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212331	-	ELM99212331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212332	-	ELM99212332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212333	-	ELM99212333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212341	-	ELM99212341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212342	-	ELM99212342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212343	-	ELM99212343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212351	-	ELM99212351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212352	-	ELM99212352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212353	-	ELM99212353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212361	-	ELM99212361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212362	-	ELM99212362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212363	-	ELM99212363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212371	-	ELM99212371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212372	-	ELM99212372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212373	-	ELM99212373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212381	-	ELM99212381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212382	-	ELM99212382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212383	-	ELM99212383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212391	-	ELM99212391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99212392	-	ELM99212392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212393	-	ELM99212393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212401	-	ELM99212401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212402	-	ELM99212402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212403	-	ELM99212403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212411	-	ELM99212411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212412	-	ELM99212412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212413	-	ELM99212413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212421	-	ELM99212421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212422	-	ELM99212422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212423	-	ELM99212423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212431	-	ELM99212431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212432	-	ELM99212432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212433	-	ELM99212433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212441	-	ELM99212441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212442	-	ELM99212442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212443	-	ELM99212443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212451	-	ELM99212451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212452	-	ELM99212452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212453	-	ELM99212453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212461	-	ELM99212461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212462	-	ELM99212462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212463	-	ELM99212463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212471	-	ELM99212471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212472	-	ELM99212472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212473	-	ELM99212473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212481	-	ELM99212481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212482	-	ELM99212482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212483	-	ELM99212483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212491	-	ELM99212491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212492	-	ELM99212492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212493	-	ELM99212493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212501	-	ELM99212501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212502	-	ELM99212502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212503	-	ELM99212503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212511	-	ELM99212511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212512	-	ELM99212512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212513	-	ELM99212513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212521	-	ELM99212521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212522	-	ELM99212522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212523	-	ELM99212523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212531	-	ELM99212531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212532	-	ELM99212532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212533	-	ELM99212533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212541	-	ELM99212541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212542	-	ELM99212542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212543	-	ELM99212543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212551	-	ELM99212551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212552	-	ELM99212552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212553	-	ELM99212553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212561	-	ELM99212561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212562	-	ELM99212562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212563	-	ELM99212563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212571	-	ELM99212571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212572	-	ELM99212572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212573	-	ELM99212573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212581	-	ELM99212581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212582	-	ELM99212582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212583	-	ELM99212583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212591	-	ELM99212591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212592	-	ELM99212592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212593	-	ELM99212593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99212601	-	ELM99212601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99212602	-	ELM99212602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99212603	-	ELM99212603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213181	-	ELM99213181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213182	-	ELM99213182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213183	-	ELM99213183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213191	-	ELM99213191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213192	-	ELM99213192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99213193	-	ELM99213193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213201	-	ELM99213201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213202	-	ELM99213202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213203	-	ELM99213203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213211	-	ELM99213211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213212	-	ELM99213212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213213	-	ELM99213213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213221	-	ELM99213221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213222	-	ELM99213222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213223	-	ELM99213223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213231	-	ELM99213231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213232	-	ELM99213232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213233	-	ELM99213233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213241	-	ELM99213241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213242	-	ELM99213242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213243	-	ELM99213243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213251	-	ELM99213251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213252	-	ELM99213252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213253	-	ELM99213253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213261	-	ELM99213261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213262	-	ELM99213262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213263	-	ELM99213263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213271	-	ELM99213271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213272	-	ELM99213272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213273	-	ELM99213273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213281	-	ELM99213281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213282	-	ELM99213282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213283	-	ELM99213283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213291	-	ELM99213291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213292	-	ELM99213292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213293	-	ELM99213293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213301	-	ELM99213301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213302	-	ELM99213302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213303	-	ELM99213303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213311	-	ELM99213311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213312	-	ELM99213312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213313	-	ELM99213313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213321	-	ELM99213321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213322	-	ELM99213322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213323	-	ELM99213323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213331	-	ELM99213331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213332	-	ELM99213332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213333	-	ELM99213333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213341	-	ELM99213341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213342	-	ELM99213342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213343	-	ELM99213343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213351	-	ELM99213351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213352	-	ELM99213352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213353	-	ELM99213353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213361	-	ELM99213361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213362	-	ELM99213362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213363	-	ELM99213363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213371	-	ELM99213371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213372	-	ELM99213372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213373	-	ELM99213373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213381	-	ELM99213381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213382	-	ELM99213382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213383	-	ELM99213383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213391	-	ELM99213391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213392	-	ELM99213392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213393	-	ELM99213393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213401	-	ELM99213401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213402	-	ELM99213402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213403	-	ELM99213403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213411	-	ELM99213411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213412	-	ELM99213412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213413	-	ELM99213413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213421	-	ELM99213421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213422	-	ELM99213422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213423	-	ELM99213423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99213431	-	ELM99213431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213432	-	ELM99213432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213433	-	ELM99213433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213441	-	ELM99213441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213442	-	ELM99213442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213443	-	ELM99213443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213451	-	ELM99213451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213452	-	ELM99213452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213453	-	ELM99213453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213461	-	ELM99213461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213462	-	ELM99213462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213463	-	ELM99213463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213471	-	ELM99213471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213472	-	ELM99213472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213473	-	ELM99213473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213481	-	ELM99213481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213482	-	ELM99213482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213483	-	ELM99213483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213491	-	ELM99213491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213492	-	ELM99213492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213493	-	ELM99213493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213501	-	ELM99213501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213502	-	ELM99213502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213503	-	ELM99213503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213511	-	ELM99213511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213512	-	ELM99213512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213513	-	ELM99213513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213521	-	ELM99213521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213522	-	ELM99213522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213523	-	ELM99213523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213531	-	ELM99213531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213532	-	ELM99213532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213533	-	ELM99213533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213541	-	ELM99213541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213542	-	ELM99213542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213543	-	ELM99213543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213551	-	ELM99213551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213552	-	ELM99213552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213553	-	ELM99213553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213561	-	ELM99213561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213562	-	ELM99213562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213563	-	ELM99213563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213571	-	ELM99213571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213572	-	ELM99213572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213573	-	ELM99213573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213581	-	ELM99213581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213582	-	ELM99213582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213583	-	ELM99213583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213591	-	ELM99213591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213592	-	ELM99213592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213593	-	ELM99213593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99213601	-	ELM99213601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99213602	-	ELM99213602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99213603	-	ELM99213603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99221181	-	ELM99221181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221182	-	ELM99221182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221183	-	ELM99221183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221191	-	ELM99221191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221192	-	ELM99221192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221193	-	ELM99221193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221201	-	ELM99221201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221202	-	ELM99221202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221203	-	ELM99221203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221211	-	ELM99221211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221212	-	ELM99221212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221213	-	ELM99221213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221221	-	ELM99221221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221222	-	ELM99221222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221223	-	ELM99221223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221231	-	ELM99221231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99221232	-	ELM99221232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221233	-	ELM99221233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221241	-	ELM99221241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221242	-	ELM99221242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221243	-	ELM99221243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221251	-	ELM99221251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221252	-	ELM99221252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221253	-	ELM99221253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221261	-	ELM99221261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221262	-	ELM99221262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221263	-	ELM99221263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221271	-	ELM99221271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221272	-	ELM99221272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221273	-	ELM99221273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221281	-	ELM99221281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221282	-	ELM99221282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221283	-	ELM99221283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221291	-	ELM99221291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221292	-	ELM99221292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221293	-	ELM99221293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221301	-	ELM99221301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221302	-	ELM99221302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221303	-	ELM99221303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221311	-	ELM99221311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221312	-	ELM99221312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221313	-	ELM99221313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221321	-	ELM99221321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221322	-	ELM99221322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221323	-	ELM99221323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221331	-	ELM99221331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221332	-	ELM99221332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221333	-	ELM99221333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221341	-	ELM99221341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221342	-	ELM99221342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221343	-	ELM99221343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221351	-	ELM99221351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221352	-	ELM99221352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221353	-	ELM99221353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221361	-	ELM99221361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221362	-	ELM99221362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221363	-	ELM99221363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221371	-	ELM99221371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221372	-	ELM99221372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221373	-	ELM99221373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221381	-	ELM99221381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221382	-	ELM99221382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221383	-	ELM99221383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221391	-	ELM99221391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221392	-	ELM99221392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221393	-	ELM99221393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221401	-	ELM99221401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221402	-	ELM99221402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221403	-	ELM99221403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221411	-	ELM99221411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221412	-	ELM99221412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221413	-	ELM99221413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221421	-	ELM99221421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221422	-	ELM99221422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221423	-	ELM99221423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221431	-	ELM99221431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221432	-	ELM99221432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221433	-	ELM99221433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221441	-	ELM99221441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221442	-	ELM99221442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221443	-	ELM99221443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221451	-	ELM99221451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221452	-	ELM99221452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221453	-	ELM99221453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221461	-	ELM99221461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221462	-	ELM99221462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99221463	-	ELM99221463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221471	-	ELM99221471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221472	-	ELM99221472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221473	-	ELM99221473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221481	-	ELM99221481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221482	-	ELM99221482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221483	-	ELM99221483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221491	-	ELM99221491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221492	-	ELM99221492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221493	-	ELM99221493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221501	-	ELM99221501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221502	-	ELM99221502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221503	-	ELM99221503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221511	-	ELM99221511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221512	-	ELM99221512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221513	-	ELM99221513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221521	-	ELM99221521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221522	-	ELM99221522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221523	-	ELM99221523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221531	-	ELM99221531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221532	-	ELM99221532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221533	-	ELM99221533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221541	-	ELM99221541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221542	-	ELM99221542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221543	-	ELM99221543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221551	-	ELM99221551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221552	-	ELM99221552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221553	-	ELM99221553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221561	-	ELM99221561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221562	-	ELM99221562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221563	-	ELM99221563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221571	-	ELM99221571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221572	-	ELM99221572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221573	-	ELM99221573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221581	-	ELM99221581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221582	-	ELM99221582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221583	-	ELM99221583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221591	-	ELM99221591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221592	-	ELM99221592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221593	-	ELM99221593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99221601	-	ELM99221601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99221602	-	ELM99221602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99221603	-	ELM99221603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99222181	-	ELM99222181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222182	-	ELM99222182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222183	-	ELM99222183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222191	-	ELM99222191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222192	-	ELM99222192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222193	-	ELM99222193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222201	-	ELM99222201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222202	-	ELM99222202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222203	-	ELM99222203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222211	-	ELM99222211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222212	-	ELM99222212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222213	-	ELM99222213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222221	-	ELM99222221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222222	-	ELM99222222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222223	-	ELM99222223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222231	-	ELM99222231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222232	-	ELM99222232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222233	-	ELM99222233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222241	-	ELM99222241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222242	-	ELM99222242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222243	-	ELM99222243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222251	-	ELM99222251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222252	-	ELM99222252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222253	-	ELM99222253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222261	-	ELM99222261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222262	-	ELM99222262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222263	-	ELM99222263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99222271	-	ELM99222271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222272	-	ELM99222272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222273	-	ELM99222273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222281	-	ELM99222281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222282	-	ELM99222282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222283	-	ELM99222283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222291	-	ELM99222291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222292	-	ELM99222292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222293	-	ELM99222293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222301	-	ELM99222301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222302	-	ELM99222302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222303	-	ELM99222303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222311	-	ELM99222311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222312	-	ELM99222312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222313	-	ELM99222313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222321	-	ELM99222321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222322	-	ELM99222322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222323	-	ELM99222323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222331	-	ELM99222331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222332	-	ELM99222332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222333	-	ELM99222333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222341	-	ELM99222341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222342	-	ELM99222342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222343	-	ELM99222343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222351	-	ELM99222351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222352	-	ELM99222352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222353	-	ELM99222353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222361	-	ELM99222361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222362	-	ELM99222362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222363	-	ELM99222363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222371	-	ELM99222371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222372	-	ELM99222372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222373	-	ELM99222373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222381	-	ELM99222381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222382	-	ELM99222382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222383	-	ELM99222383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222391	-	ELM99222391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222392	-	ELM99222392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222393	-	ELM99222393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222401	-	ELM99222401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222402	-	ELM99222402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222403	-	ELM99222403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222411	-	ELM99222411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222412	-	ELM99222412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222413	-	ELM99222413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222421	-	ELM99222421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222422	-	ELM99222422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222423	-	ELM99222423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222431	-	ELM99222431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222432	-	ELM99222432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222433	-	ELM99222433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222441	-	ELM99222441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222442	-	ELM99222442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222443	-	ELM99222443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222451	-	ELM99222451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222452	-	ELM99222452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222453	-	ELM99222453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222461	-	ELM99222461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222462	-	ELM99222462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222463	-	ELM99222463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222471	-	ELM99222471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222472	-	ELM99222472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222473	-	ELM99222473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222481	-	ELM99222481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222482	-	ELM99222482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222483	-	ELM99222483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222491	-	ELM99222491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222492	-	ELM99222492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222493	-	ELM99222493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222501	-	ELM99222501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99222502	-	ELM99222502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222503	-	ELM99222503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222511	-	ELM99222511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222512	-	ELM99222512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222513	-	ELM99222513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222521	-	ELM99222521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222522	-	ELM99222522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222523	-	ELM99222523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222531	-	ELM99222531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222532	-	ELM99222532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222533	-	ELM99222533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222541	-	ELM99222541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222542	-	ELM99222542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222543	-	ELM99222543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222551	-	ELM99222551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222552	-	ELM99222552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222553	-	ELM99222553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222561	-	ELM99222561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222562	-	ELM99222562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222563	-	ELM99222563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222571	-	ELM99222571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222572	-	ELM99222572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222573	-	ELM99222573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222581	-	ELM99222581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222582	-	ELM99222582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222583	-	ELM99222583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222591	-	ELM99222591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222592	-	ELM99222592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222593	-	ELM99222593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99222601	-	ELM99222601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99222602	-	ELM99222602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99222603	-	ELM99222603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223181	-	ELM99223181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223182	-	ELM99223182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223183	-	ELM99223183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223191	-	ELM99223191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223192	-	ELM99223192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223193	-	ELM99223193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223201	-	ELM99223201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223202	-	ELM99223202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223203	-	ELM99223203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223211	-	ELM99223211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223212	-	ELM99223212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223213	-	ELM99223213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223221	-	ELM99223221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223222	-	ELM99223222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223223	-	ELM99223223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223231	-	ELM99223231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223232	-	ELM99223232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223233	-	ELM99223233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223241	-	ELM99223241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223242	-	ELM99223242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223243	-	ELM99223243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223251	-	ELM99223251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223252	-	ELM99223252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223253	-	ELM99223253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223261	-	ELM99223261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223262	-	ELM99223262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223263	-	ELM99223263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223271	-	ELM99223271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223272	-	ELM99223272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223273	-	ELM99223273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223281	-	ELM99223281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223282	-	ELM99223282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223283	-	ELM99223283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223291	-	ELM99223291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223292	-	ELM99223292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223293	-	ELM99223293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223301	-	ELM99223301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223302	-	ELM99223302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99223303	-	ELM99223303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223311	-	ELM99223311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223312	-	ELM99223312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223313	-	ELM99223313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223321	-	ELM99223321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223322	-	ELM99223322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223323	-	ELM99223323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223331	-	ELM99223331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223332	-	ELM99223332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223333	-	ELM99223333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223341	-	ELM99223341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223342	-	ELM99223342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223343	-	ELM99223343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223351	-	ELM99223351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223352	-	ELM99223352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223353	-	ELM99223353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223361	-	ELM99223361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223362	-	ELM99223362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223363	-	ELM99223363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223371	-	ELM99223371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223372	-	ELM99223372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223373	-	ELM99223373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223381	-	ELM99223381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223382	-	ELM99223382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223383	-	ELM99223383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223391	-	ELM99223391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223392	-	ELM99223392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223393	-	ELM99223393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223401	-	ELM99223401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223402	-	ELM99223402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223403	-	ELM99223403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223411	-	ELM99223411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223412	-	ELM99223412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223413	-	ELM99223413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223421	-	ELM99223421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223422	-	ELM99223422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223423	-	ELM99223423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223431	-	ELM99223431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223432	-	ELM99223432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223433	-	ELM99223433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223441	-	ELM99223441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223442	-	ELM99223442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223443	-	ELM99223443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223451	-	ELM99223451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223452	-	ELM99223452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223453	-	ELM99223453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223461	-	ELM99223461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223462	-	ELM99223462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223463	-	ELM99223463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223471	-	ELM99223471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223472	-	ELM99223472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223473	-	ELM99223473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223481	-	ELM99223481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223482	-	ELM99223482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223483	-	ELM99223483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223491	-	ELM99223491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223492	-	ELM99223492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223493	-	ELM99223493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223501	-	ELM99223501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223502	-	ELM99223502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223503	-	ELM99223503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223511	-	ELM99223511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223512	-	ELM99223512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223513	-	ELM99223513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223521	-	ELM99223521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223522	-	ELM99223522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223523	-	ELM99223523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223531	-	ELM99223531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223532	-	ELM99223532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223533	-	ELM99223533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99223541	-	ELM99223541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223542	-	ELM99223542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223543	-	ELM99223543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223551	-	ELM99223551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223552	-	ELM99223552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223553	-	ELM99223553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223561	-	ELM99223561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223562	-	ELM99223562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223563	-	ELM99223563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223571	-	ELM99223571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223572	-	ELM99223572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223573	-	ELM99223573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223581	-	ELM99223581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223582	-	ELM99223582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223583	-	ELM99223583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223591	-	ELM99223591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223592	-	ELM99223592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223593	-	ELM99223593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99223601	-	ELM99223601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99223602	-	ELM99223602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99223603	-	ELM99223603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99231181	-	ELM99231181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231182	-	ELM99231182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231183	-	ELM99231183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231191	-	ELM99231191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231192	-	ELM99231192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231193	-	ELM99231193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231201	-	ELM99231201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231202	-	ELM99231202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231203	-	ELM99231203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231211	-	ELM99231211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231212	-	ELM99231212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231213	-	ELM99231213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231221	-	ELM99231221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231222	-	ELM99231222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231223	-	ELM99231223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231231	-	ELM99231231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231232	-	ELM99231232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231233	-	ELM99231233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231241	-	ELM99231241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231242	-	ELM99231242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231243	-	ELM99231243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231251	-	ELM99231251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231252	-	ELM99231252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231253	-	ELM99231253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231261	-	ELM99231261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231262	-	ELM99231262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231263	-	ELM99231263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231271	-	ELM99231271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231272	-	ELM99231272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231273	-	ELM99231273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231281	-	ELM99231281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231282	-	ELM99231282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231283	-	ELM99231283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231291	-	ELM99231291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231292	-	ELM99231292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231293	-	ELM99231293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231301	-	ELM99231301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231302	-	ELM99231302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231303	-	ELM99231303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231311	-	ELM99231311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231312	-	ELM99231312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231313	-	ELM99231313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231321	-	ELM99231321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231322	-	ELM99231322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231323	-	ELM99231323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231331	-	ELM99231331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231332	-	ELM99231332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231333	-	ELM99231333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231341	-	ELM99231341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99231342	-	ELM99231342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231343	-	ELM99231343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231351	-	ELM99231351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231352	-	ELM99231352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231353	-	ELM99231353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231361	-	ELM99231361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231362	-	ELM99231362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231363	-	ELM99231363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231371	-	ELM99231371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231372	-	ELM99231372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231373	-	ELM99231373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231381	-	ELM99231381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231382	-	ELM99231382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231383	-	ELM99231383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231391	-	ELM99231391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231392	-	ELM99231392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231393	-	ELM99231393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231401	-	ELM99231401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231402	-	ELM99231402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231403	-	ELM99231403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231411	-	ELM99231411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231412	-	ELM99231412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231413	-	ELM99231413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231421	-	ELM99231421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231422	-	ELM99231422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231423	-	ELM99231423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231431	-	ELM99231431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231432	-	ELM99231432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231433	-	ELM99231433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231441	-	ELM99231441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231442	-	ELM99231442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231443	-	ELM99231443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231451	-	ELM99231451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231452	-	ELM99231452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231453	-	ELM99231453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231461	-	ELM99231461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231462	-	ELM99231462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231463	-	ELM99231463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231471	-	ELM99231471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231472	-	ELM99231472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231473	-	ELM99231473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231481	-	ELM99231481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231482	-	ELM99231482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231483	-	ELM99231483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231491	-	ELM99231491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231492	-	ELM99231492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231493	-	ELM99231493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231501	-	ELM99231501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231502	-	ELM99231502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231503	-	ELM99231503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231511	-	ELM99231511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231512	-	ELM99231512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231513	-	ELM99231513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231521	-	ELM99231521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231522	-	ELM99231522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231523	-	ELM99231523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231531	-	ELM99231531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231532	-	ELM99231532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231533	-	ELM99231533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231541	-	ELM99231541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231542	-	ELM99231542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231543	-	ELM99231543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231551	-	ELM99231551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231552	-	ELM99231552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231553	-	ELM99231553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231561	-	ELM99231561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231562	-	ELM99231562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231563	-	ELM99231563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231571	-	ELM99231571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231572	-	ELM99231572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99231573	-	ELM99231573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231581	-	ELM99231581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231582	-	ELM99231582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231583	-	ELM99231583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231591	-	ELM99231591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231592	-	ELM99231592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231593	-	ELM99231593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99231601	-	ELM99231601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99231602	-	ELM99231602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99231603	-	ELM99231603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99232181	-	ELM99232181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232182	-	ELM99232182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232183	-	ELM99232183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232191	-	ELM99232191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232192	-	ELM99232192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232193	-	ELM99232193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232201	-	ELM99232201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232202	-	ELM99232202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232203	-	ELM99232203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232211	-	ELM99232211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232212	-	ELM99232212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232213	-	ELM99232213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232221	-	ELM99232221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232222	-	ELM99232222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232223	-	ELM99232223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232231	-	ELM99232231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232232	-	ELM99232232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232233	-	ELM99232233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232241	-	ELM99232241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232242	-	ELM99232242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232243	-	ELM99232243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232251	-	ELM99232251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232252	-	ELM99232252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232253	-	ELM99232253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232261	-	ELM99232261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232262	-	ELM99232262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232263	-	ELM99232263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232271	-	ELM99232271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232272	-	ELM99232272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232273	-	ELM99232273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232281	-	ELM99232281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232282	-	ELM99232282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232283	-	ELM99232283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232291	-	ELM99232291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232292	-	ELM99232292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232293	-	ELM99232293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232301	-	ELM99232301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232302	-	ELM99232302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232303	-	ELM99232303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232311	-	ELM99232311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232312	-	ELM99232312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232313	-	ELM99232313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232321	-	ELM99232321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232322	-	ELM99232322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232323	-	ELM99232323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232331	-	ELM99232331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232332	-	ELM99232332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232333	-	ELM99232333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232341	-	ELM99232341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232342	-	ELM99232342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232343	-	ELM99232343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232351	-	ELM99232351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232352	-	ELM99232352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232353	-	ELM99232353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232361	-	ELM99232361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232362	-	ELM99232362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232363	-	ELM99232363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232371	-	ELM99232371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232372	-	ELM99232372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232373	-	ELM99232373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99232381	-	ELM99232381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232382	-	ELM99232382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232383	-	ELM99232383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232391	-	ELM99232391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232392	-	ELM99232392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232393	-	ELM99232393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232401	-	ELM99232401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232402	-	ELM99232402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232403	-	ELM99232403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232411	-	ELM99232411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232412	-	ELM99232412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232413	-	ELM99232413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232421	-	ELM99232421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232422	-	ELM99232422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232423	-	ELM99232423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232431	-	ELM99232431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232432	-	ELM99232432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232433	-	ELM99232433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232441	-	ELM99232441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232442	-	ELM99232442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232443	-	ELM99232443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232451	-	ELM99232451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232452	-	ELM99232452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232453	-	ELM99232453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232461	-	ELM99232461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232462	-	ELM99232462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232463	-	ELM99232463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232471	-	ELM99232471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232472	-	ELM99232472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232473	-	ELM99232473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232481	-	ELM99232481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232482	-	ELM99232482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232483	-	ELM99232483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232491	-	ELM99232491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232492	-	ELM99232492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232493	-	ELM99232493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232501	-	ELM99232501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232502	-	ELM99232502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232503	-	ELM99232503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232511	-	ELM99232511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232512	-	ELM99232512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232513	-	ELM99232513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232521	-	ELM99232521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232522	-	ELM99232522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232523	-	ELM99232523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232531	-	ELM99232531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232532	-	ELM99232532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232533	-	ELM99232533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232541	-	ELM99232541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232542	-	ELM99232542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232543	-	ELM99232543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232551	-	ELM99232551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232552	-	ELM99232552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232553	-	ELM99232553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232561	-	ELM99232561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232562	-	ELM99232562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232563	-	ELM99232563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232571	-	ELM99232571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232572	-	ELM99232572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232573	-	ELM99232573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232581	-	ELM99232581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232582	-	ELM99232582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232583	-	ELM99232583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232591	-	ELM99232591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232592	-	ELM99232592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232593	-	ELM99232593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99232601	-	ELM99232601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99232602	-	ELM99232602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99232603	-	ELM99232603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233181	-	ELM99233181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99233182	-	ELM99233182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233183	-	ELM99233183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233191	-	ELM99233191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233192	-	ELM99233192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233193	-	ELM99233193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233201	-	ELM99233201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233202	-	ELM99233202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233203	-	ELM99233203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233211	-	ELM99233211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233212	-	ELM99233212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233213	-	ELM99233213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233221	-	ELM99233221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233222	-	ELM99233222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233223	-	ELM99233223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233231	-	ELM99233231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233232	-	ELM99233232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233233	-	ELM99233233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233241	-	ELM99233241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233242	-	ELM99233242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233243	-	ELM99233243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233251	-	ELM99233251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233252	-	ELM99233252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233253	-	ELM99233253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233261	-	ELM99233261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233262	-	ELM99233262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233263	-	ELM99233263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233271	-	ELM99233271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233272	-	ELM99233272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233273	-	ELM99233273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233281	-	ELM99233281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233282	-	ELM99233282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233283	-	ELM99233283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233291	-	ELM99233291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233292	-	ELM99233292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233293	-	ELM99233293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233301	-	ELM99233301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233302	-	ELM99233302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233303	-	ELM99233303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233311	-	ELM99233311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233312	-	ELM99233312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233313	-	ELM99233313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233321	-	ELM99233321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233322	-	ELM99233322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233323	-	ELM99233323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233331	-	ELM99233331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233332	-	ELM99233332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233333	-	ELM99233333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233341	-	ELM99233341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233342	-	ELM99233342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233343	-	ELM99233343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233351	-	ELM99233351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233352	-	ELM99233352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233353	-	ELM99233353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233361	-	ELM99233361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233362	-	ELM99233362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233363	-	ELM99233363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233371	-	ELM99233371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233372	-	ELM99233372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233373	-	ELM99233373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233381	-	ELM99233381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233382	-	ELM99233382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233383	-	ELM99233383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233391	-	ELM99233391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233392	-	ELM99233392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233393	-	ELM99233393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233401	-	ELM99233401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233402	-	ELM99233402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233403	-	ELM99233403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233411	-	ELM99233411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233412	-	ELM99233412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99233413	-	ELM99233413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233421	-	ELM99233421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233422	-	ELM99233422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233423	-	ELM99233423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233431	-	ELM99233431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233432	-	ELM99233432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233433	-	ELM99233433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233441	-	ELM99233441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233442	-	ELM99233442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233443	-	ELM99233443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233451	-	ELM99233451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233452	-	ELM99233452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233453	-	ELM99233453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233461	-	ELM99233461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233462	-	ELM99233462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233463	-	ELM99233463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233471	-	ELM99233471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233472	-	ELM99233472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233473	-	ELM99233473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233481	-	ELM99233481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233482	-	ELM99233482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233483	-	ELM99233483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233491	-	ELM99233491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233492	-	ELM99233492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233493	-	ELM99233493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233501	-	ELM99233501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233502	-	ELM99233502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233503	-	ELM99233503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233511	-	ELM99233511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233512	-	ELM99233512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233513	-	ELM99233513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233521	-	ELM99233521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233522	-	ELM99233522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233523	-	ELM99233523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233531	-	ELM99233531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233532	-	ELM99233532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233533	-	ELM99233533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233541	-	ELM99233541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233542	-	ELM99233542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233543	-	ELM99233543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233551	-	ELM99233551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233552	-	ELM99233552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233553	-	ELM99233553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233561	-	ELM99233561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233562	-	ELM99233562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233563	-	ELM99233563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233571	-	ELM99233571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233572	-	ELM99233572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233573	-	ELM99233573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233581	-	ELM99233581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233582	-	ELM99233582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233583	-	ELM99233583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233591	-	ELM99233591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233592	-	ELM99233592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233593	-	ELM99233593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99233601	-	ELM99233601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99233602	-	ELM99233602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99233603	-	ELM99233603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99241181	-	ELM99241181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241182	-	ELM99241182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241183	-	ELM99241183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241191	-	ELM99241191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241192	-	ELM99241192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241193	-	ELM99241193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241201	-	ELM99241201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241202	-	ELM99241202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241203	-	ELM99241203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241211	-	ELM99241211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241212	-	ELM99241212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241213	-	ELM99241213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99241221	-	ELM99241221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241222	-	ELM99241222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241223	-	ELM99241223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241231	-	ELM99241231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241232	-	ELM99241232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241233	-	ELM99241233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241241	-	ELM99241241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241242	-	ELM99241242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241243	-	ELM99241243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241251	-	ELM99241251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241252	-	ELM99241252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241253	-	ELM99241253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241261	-	ELM99241261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241262	-	ELM99241262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241263	-	ELM99241263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241271	-	ELM99241271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241272	-	ELM99241272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241273	-	ELM99241273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241281	-	ELM99241281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241282	-	ELM99241282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241283	-	ELM99241283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241291	-	ELM99241291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241292	-	ELM99241292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241293	-	ELM99241293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241301	-	ELM99241301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241302	-	ELM99241302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241303	-	ELM99241303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241311	-	ELM99241311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241312	-	ELM99241312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241313	-	ELM99241313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241321	-	ELM99241321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241322	-	ELM99241322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241323	-	ELM99241323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241331	-	ELM99241331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241332	-	ELM99241332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241333	-	ELM99241333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241341	-	ELM99241341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241342	-	ELM99241342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241343	-	ELM99241343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241351	-	ELM99241351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241352	-	ELM99241352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241353	-	ELM99241353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241361	-	ELM99241361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241362	-	ELM99241362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241363	-	ELM99241363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241371	-	ELM99241371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241372	-	ELM99241372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241373	-	ELM99241373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241381	-	ELM99241381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241382	-	ELM99241382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241383	-	ELM99241383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241391	-	ELM99241391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241392	-	ELM99241392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241393	-	ELM99241393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241401	-	ELM99241401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241402	-	ELM99241402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241403	-	ELM99241403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241411	-	ELM99241411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241412	-	ELM99241412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241413	-	ELM99241413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241421	-	ELM99241421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241422	-	ELM99241422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241423	-	ELM99241423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241431	-	ELM99241431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241432	-	ELM99241432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241433	-	ELM99241433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241441	-	ELM99241441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241442	-	ELM99241442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241443	-	ELM99241443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241451	-	ELM99241451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99241452	-	ELM99241452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241453	-	ELM99241453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241461	-	ELM99241461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241462	-	ELM99241462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241463	-	ELM99241463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241471	-	ELM99241471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241472	-	ELM99241472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241473	-	ELM99241473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241481	-	ELM99241481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241482	-	ELM99241482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241483	-	ELM99241483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241491	-	ELM99241491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241492	-	ELM99241492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241493	-	ELM99241493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241501	-	ELM99241501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241502	-	ELM99241502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241503	-	ELM99241503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241511	-	ELM99241511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241512	-	ELM99241512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241513	-	ELM99241513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241521	-	ELM99241521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241522	-	ELM99241522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241523	-	ELM99241523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241531	-	ELM99241531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241532	-	ELM99241532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241533	-	ELM99241533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241541	-	ELM99241541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241542	-	ELM99241542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241543	-	ELM99241543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241551	-	ELM99241551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241552	-	ELM99241552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241553	-	ELM99241553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241561	-	ELM99241561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241562	-	ELM99241562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241563	-	ELM99241563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241571	-	ELM99241571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241572	-	ELM99241572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241573	-	ELM99241573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241581	-	ELM99241581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241582	-	ELM99241582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241583	-	ELM99241583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241591	-	ELM99241591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241592	-	ELM99241592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241593	-	ELM99241593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99241601	-	ELM99241601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99241602	-	ELM99241602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99241603	-	ELM99241603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99242181	-	ELM99242181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242182	-	ELM99242182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242183	-	ELM99242183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242191	-	ELM99242191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242192	-	ELM99242192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242193	-	ELM99242193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242201	-	ELM99242201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242202	-	ELM99242202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242203	-	ELM99242203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242211	-	ELM99242211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242212	-	ELM99242212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242213	-	ELM99242213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242221	-	ELM99242221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242222	-	ELM99242222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242223	-	ELM99242223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242231	-	ELM99242231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242232	-	ELM99242232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242233	-	ELM99242233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242241	-	ELM99242241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242242	-	ELM99242242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242243	-	ELM99242243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242251	-	ELM99242251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242252	-	ELM99242252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99242253	-	ELM99242253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242261	-	ELM99242261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242262	-	ELM99242262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242263	-	ELM99242263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242271	-	ELM99242271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242272	-	ELM99242272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242273	-	ELM99242273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242281	-	ELM99242281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242282	-	ELM99242282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242283	-	ELM99242283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242291	-	ELM99242291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242292	-	ELM99242292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242293	-	ELM99242293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242301	-	ELM99242301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242302	-	ELM99242302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242303	-	ELM99242303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242311	-	ELM99242311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242312	-	ELM99242312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242313	-	ELM99242313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242321	-	ELM99242321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242322	-	ELM99242322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242323	-	ELM99242323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242331	-	ELM99242331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242332	-	ELM99242332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242333	-	ELM99242333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242341	-	ELM99242341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242342	-	ELM99242342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242343	-	ELM99242343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242351	-	ELM99242351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242352	-	ELM99242352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242353	-	ELM99242353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242361	-	ELM99242361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242362	-	ELM99242362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242363	-	ELM99242363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242371	-	ELM99242371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242372	-	ELM99242372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242373	-	ELM99242373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242381	-	ELM99242381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242382	-	ELM99242382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242383	-	ELM99242383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242391	-	ELM99242391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242392	-	ELM99242392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242393	-	ELM99242393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242401	-	ELM99242401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242402	-	ELM99242402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242403	-	ELM99242403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242411	-	ELM99242411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242412	-	ELM99242412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242413	-	ELM99242413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242421	-	ELM99242421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242422	-	ELM99242422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242423	-	ELM99242423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242431	-	ELM99242431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242432	-	ELM99242432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242433	-	ELM99242433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242441	-	ELM99242441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242442	-	ELM99242442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242443	-	ELM99242443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242451	-	ELM99242451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242452	-	ELM99242452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242453	-	ELM99242453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242461	-	ELM99242461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242462	-	ELM99242462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242463	-	ELM99242463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242471	-	ELM99242471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242472	-	ELM99242472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242473	-	ELM99242473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242481	-	ELM99242481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242482	-	ELM99242482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242483	-	ELM99242483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99242491	-	ELM99242491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242492	-	ELM99242492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242493	-	ELM99242493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242501	-	ELM99242501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242502	-	ELM99242502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242503	-	ELM99242503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242511	-	ELM99242511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242512	-	ELM99242512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242513	-	ELM99242513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242521	-	ELM99242521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242522	-	ELM99242522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242523	-	ELM99242523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242531	-	ELM99242531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242532	-	ELM99242532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242533	-	ELM99242533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242541	-	ELM99242541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242542	-	ELM99242542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242543	-	ELM99242543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242551	-	ELM99242551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242552	-	ELM99242552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242553	-	ELM99242553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242561	-	ELM99242561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242562	-	ELM99242562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242563	-	ELM99242563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242571	-	ELM99242571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242572	-	ELM99242572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242573	-	ELM99242573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242581	-	ELM99242581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242582	-	ELM99242582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242583	-	ELM99242583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242591	-	ELM99242591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242592	-	ELM99242592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242593	-	ELM99242593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99242601	-	ELM99242601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99242602	-	ELM99242602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99242603	-	ELM99242603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243181	-	ELM99243181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243182	-	ELM99243182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243183	-	ELM99243183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243191	-	ELM99243191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243192	-	ELM99243192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243193	-	ELM99243193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243201	-	ELM99243201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243202	-	ELM99243202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243203	-	ELM99243203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243211	-	ELM99243211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243212	-	ELM99243212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243213	-	ELM99243213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243221	-	ELM99243221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243222	-	ELM99243222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243223	-	ELM99243223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243231	-	ELM99243231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243232	-	ELM99243232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243233	-	ELM99243233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243241	-	ELM99243241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243242	-	ELM99243242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243243	-	ELM99243243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243251	-	ELM99243251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243252	-	ELM99243252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243253	-	ELM99243253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243261	-	ELM99243261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243262	-	ELM99243262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243263	-	ELM99243263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243271	-	ELM99243271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243272	-	ELM99243272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243273	-	ELM99243273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243281	-	ELM99243281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243282	-	ELM99243282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243283	-	ELM99243283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243291	-	ELM99243291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99243292	-	ELM99243292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243293	-	ELM99243293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243301	-	ELM99243301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243302	-	ELM99243302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243303	-	ELM99243303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243311	-	ELM99243311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243312	-	ELM99243312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243313	-	ELM99243313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243321	-	ELM99243321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243322	-	ELM99243322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243323	-	ELM99243323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243331	-	ELM99243331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243332	-	ELM99243332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243333	-	ELM99243333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243341	-	ELM99243341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243342	-	ELM99243342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243343	-	ELM99243343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243351	-	ELM99243351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243352	-	ELM99243352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243353	-	ELM99243353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243361	-	ELM99243361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243362	-	ELM99243362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243363	-	ELM99243363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243371	-	ELM99243371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243372	-	ELM99243372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243373	-	ELM99243373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243381	-	ELM99243381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243382	-	ELM99243382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243383	-	ELM99243383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243391	-	ELM99243391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243392	-	ELM99243392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243393	-	ELM99243393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243401	-	ELM99243401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243402	-	ELM99243402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243403	-	ELM99243403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243411	-	ELM99243411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243412	-	ELM99243412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243413	-	ELM99243413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243421	-	ELM99243421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243422	-	ELM99243422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243423	-	ELM99243423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243431	-	ELM99243431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243432	-	ELM99243432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243433	-	ELM99243433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243441	-	ELM99243441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243442	-	ELM99243442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243443	-	ELM99243443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243451	-	ELM99243451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243452	-	ELM99243452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243453	-	ELM99243453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243461	-	ELM99243461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243462	-	ELM99243462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243463	-	ELM99243463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243471	-	ELM99243471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243472	-	ELM99243472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243473	-	ELM99243473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243481	-	ELM99243481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243482	-	ELM99243482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243483	-	ELM99243483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243491	-	ELM99243491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243492	-	ELM99243492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243493	-	ELM99243493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243501	-	ELM99243501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243502	-	ELM99243502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243503	-	ELM99243503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243511	-	ELM99243511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243512	-	ELM99243512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243513	-	ELM99243513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243521	-	ELM99243521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243522	-	ELM99243522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99243523	-	ELM99243523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243531	-	ELM99243531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243532	-	ELM99243532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243533	-	ELM99243533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243541	-	ELM99243541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243542	-	ELM99243542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243543	-	ELM99243543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243551	-	ELM99243551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243552	-	ELM99243552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243553	-	ELM99243553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243561	-	ELM99243561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243562	-	ELM99243562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243563	-	ELM99243563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243571	-	ELM99243571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243572	-	ELM99243572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243573	-	ELM99243573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243581	-	ELM99243581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243582	-	ELM99243582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243583	-	ELM99243583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243591	-	ELM99243591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243592	-	ELM99243592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243593	-	ELM99243593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99243601	-	ELM99243601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99243602	-	ELM99243602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99243603	-	ELM99243603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99251181	-	ELM99251181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251182	-	ELM99251182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251183	-	ELM99251183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251191	-	ELM99251191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251192	-	ELM99251192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251193	-	ELM99251193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251201	-	ELM99251201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251202	-	ELM99251202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251203	-	ELM99251203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251211	-	ELM99251211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251212	-	ELM99251212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251213	-	ELM99251213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251221	-	ELM99251221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251222	-	ELM99251222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251223	-	ELM99251223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251231	-	ELM99251231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251232	-	ELM99251232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251233	-	ELM99251233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251241	-	ELM99251241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251242	-	ELM99251242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251243	-	ELM99251243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251251	-	ELM99251251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251252	-	ELM99251252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251253	-	ELM99251253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251261	-	ELM99251261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251262	-	ELM99251262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251263	-	ELM99251263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251271	-	ELM99251271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251272	-	ELM99251272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251273	-	ELM99251273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251281	-	ELM99251281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251282	-	ELM99251282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251283	-	ELM99251283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251291	-	ELM99251291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251292	-	ELM99251292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251293	-	ELM99251293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251301	-	ELM99251301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251302	-	ELM99251302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251303	-	ELM99251303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251311	-	ELM99251311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251312	-	ELM99251312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251313	-	ELM99251313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251321	-	ELM99251321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251322	-	ELM99251322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251323	-	ELM99251323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99251331	-	ELM99251331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251332	-	ELM99251332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251333	-	ELM99251333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251341	-	ELM99251341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251342	-	ELM99251342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251343	-	ELM99251343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251351	-	ELM99251351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251352	-	ELM99251352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251353	-	ELM99251353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251361	-	ELM99251361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251362	-	ELM99251362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251363	-	ELM99251363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251371	-	ELM99251371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251372	-	ELM99251372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251373	-	ELM99251373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251381	-	ELM99251381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251382	-	ELM99251382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251383	-	ELM99251383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251391	-	ELM99251391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251392	-	ELM99251392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251393	-	ELM99251393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251401	-	ELM99251401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251402	-	ELM99251402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251403	-	ELM99251403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251411	-	ELM99251411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251412	-	ELM99251412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251413	-	ELM99251413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251421	-	ELM99251421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251422	-	ELM99251422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251423	-	ELM99251423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251431	-	ELM99251431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251432	-	ELM99251432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251433	-	ELM99251433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251441	-	ELM99251441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251442	-	ELM99251442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251443	-	ELM99251443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251451	-	ELM99251451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251452	-	ELM99251452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251453	-	ELM99251453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251461	-	ELM99251461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251462	-	ELM99251462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251463	-	ELM99251463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251471	-	ELM99251471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251472	-	ELM99251472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251473	-	ELM99251473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251481	-	ELM99251481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251482	-	ELM99251482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251483	-	ELM99251483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251491	-	ELM99251491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251492	-	ELM99251492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251493	-	ELM99251493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251501	-	ELM99251501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251502	-	ELM99251502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251503	-	ELM99251503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251511	-	ELM99251511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251512	-	ELM99251512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251513	-	ELM99251513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251521	-	ELM99251521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251522	-	ELM99251522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251523	-	ELM99251523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251531	-	ELM99251531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251532	-	ELM99251532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251533	-	ELM99251533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251541	-	ELM99251541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251542	-	ELM99251542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251543	-	ELM99251543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251551	-	ELM99251551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251552	-	ELM99251552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251553	-	ELM99251553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251561	-	ELM99251561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99251562	-	ELM99251562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251563	-	ELM99251563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251571	-	ELM99251571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251572	-	ELM99251572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251573	-	ELM99251573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251581	-	ELM99251581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251582	-	ELM99251582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251583	-	ELM99251583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251591	-	ELM99251591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251592	-	ELM99251592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251593	-	ELM99251593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99251601	-	ELM99251601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99251602	-	ELM99251602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99251603	-	ELM99251603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99252181	-	ELM99252181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252182	-	ELM99252182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252183	-	ELM99252183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252191	-	ELM99252191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252192	-	ELM99252192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252193	-	ELM99252193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252201	-	ELM99252201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252202	-	ELM99252202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252203	-	ELM99252203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252211	-	ELM99252211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252212	-	ELM99252212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252213	-	ELM99252213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252221	-	ELM99252221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252222	-	ELM99252222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252223	-	ELM99252223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252231	-	ELM99252231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252232	-	ELM99252232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252233	-	ELM99252233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252241	-	ELM99252241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252242	-	ELM99252242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252243	-	ELM99252243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252251	-	ELM99252251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252252	-	ELM99252252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252253	-	ELM99252253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252261	-	ELM99252261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252262	-	ELM99252262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252263	-	ELM99252263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252271	-	ELM99252271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252272	-	ELM99252272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252273	-	ELM99252273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252281	-	ELM99252281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252282	-	ELM99252282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252283	-	ELM99252283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252291	-	ELM99252291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252292	-	ELM99252292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252293	-	ELM99252293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252301	-	ELM99252301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252302	-	ELM99252302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252303	-	ELM99252303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252311	-	ELM99252311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252312	-	ELM99252312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252313	-	ELM99252313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252321	-	ELM99252321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252322	-	ELM99252322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252323	-	ELM99252323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252331	-	ELM99252331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252332	-	ELM99252332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252333	-	ELM99252333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252341	-	ELM99252341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252342	-	ELM99252342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252343	-	ELM99252343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252351	-	ELM99252351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252352	-	ELM99252352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252353	-	ELM99252353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252361	-	ELM99252361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252362	-	ELM99252362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99252363	-	ELM99252363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252371	-	ELM99252371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252372	-	ELM99252372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252373	-	ELM99252373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252381	-	ELM99252381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252382	-	ELM99252382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252383	-	ELM99252383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252391	-	ELM99252391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252392	-	ELM99252392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252393	-	ELM99252393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252401	-	ELM99252401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252402	-	ELM99252402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252403	-	ELM99252403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252411	-	ELM99252411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252412	-	ELM99252412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252413	-	ELM99252413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252421	-	ELM99252421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252422	-	ELM99252422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252423	-	ELM99252423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252431	-	ELM99252431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252432	-	ELM99252432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252433	-	ELM99252433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252441	-	ELM99252441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252442	-	ELM99252442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252443	-	ELM99252443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252451	-	ELM99252451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252452	-	ELM99252452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252453	-	ELM99252453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252461	-	ELM99252461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252462	-	ELM99252462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252463	-	ELM99252463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252471	-	ELM99252471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252472	-	ELM99252472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252473	-	ELM99252473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252481	-	ELM99252481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252482	-	ELM99252482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252483	-	ELM99252483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252491	-	ELM99252491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252492	-	ELM99252492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252493	-	ELM99252493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252501	-	ELM99252501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252502	-	ELM99252502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252503	-	ELM99252503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252511	-	ELM99252511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252512	-	ELM99252512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252513	-	ELM99252513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252521	-	ELM99252521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252522	-	ELM99252522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252523	-	ELM99252523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252531	-	ELM99252531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252532	-	ELM99252532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252533	-	ELM99252533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252541	-	ELM99252541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252542	-	ELM99252542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252543	-	ELM99252543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252551	-	ELM99252551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252552	-	ELM99252552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252553	-	ELM99252553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252561	-	ELM99252561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252562	-	ELM99252562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252563	-	ELM99252563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252571	-	ELM99252571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252572	-	ELM99252572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252573	-	ELM99252573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252581	-	ELM99252581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252582	-	ELM99252582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252583	-	ELM99252583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99252591	-	ELM99252591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252592	-	ELM99252592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252593	-	ELM99252593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99252601	-	ELM99252601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99252602	-	ELM99252602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99252603	-	ELM99252603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253181	-	ELM99253181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253182	-	ELM99253182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253183	-	ELM99253183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253191	-	ELM99253191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253192	-	ELM99253192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253193	-	ELM99253193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253201	-	ELM99253201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253202	-	ELM99253202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253203	-	ELM99253203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253211	-	ELM99253211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253212	-	ELM99253212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253213	-	ELM99253213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253221	-	ELM99253221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253222	-	ELM99253222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253223	-	ELM99253223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253231	-	ELM99253231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253232	-	ELM99253232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253233	-	ELM99253233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253241	-	ELM99253241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253242	-	ELM99253242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253243	-	ELM99253243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253251	-	ELM99253251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253252	-	ELM99253252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253253	-	ELM99253253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253261	-	ELM99253261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253262	-	ELM99253262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253263	-	ELM99253263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253271	-	ELM99253271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253272	-	ELM99253272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253273	-	ELM99253273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253281	-	ELM99253281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253282	-	ELM99253282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253283	-	ELM99253283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253291	-	ELM99253291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253292	-	ELM99253292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253293	-	ELM99253293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253301	-	ELM99253301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253302	-	ELM99253302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253303	-	ELM99253303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253311	-	ELM99253311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253312	-	ELM99253312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253313	-	ELM99253313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253321	-	ELM99253321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253322	-	ELM99253322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253323	-	ELM99253323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253331	-	ELM99253331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253332	-	ELM99253332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253333	-	ELM99253333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253341	-	ELM99253341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253342	-	ELM99253342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253343	-	ELM99253343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253351	-	ELM99253351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253352	-	ELM99253352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253353	-	ELM99253353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253361	-	ELM99253361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253362	-	ELM99253362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253363	-	ELM99253363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253371	-	ELM99253371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253372	-	ELM99253372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253373	-	ELM99253373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253381	-	ELM99253381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253382	-	ELM99253382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253383	-	ELM99253383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253391	-	ELM99253391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253392	-	ELM99253392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253393	-	ELM99253393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253401	-	ELM99253401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99253402	-	ELM99253402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253403	-	ELM99253403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253411	-	ELM99253411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253412	-	ELM99253412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253413	-	ELM99253413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253421	-	ELM99253421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253422	-	ELM99253422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253423	-	ELM99253423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253431	-	ELM99253431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253432	-	ELM99253432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253433	-	ELM99253433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253441	-	ELM99253441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253442	-	ELM99253442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253443	-	ELM99253443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253451	-	ELM99253451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253452	-	ELM99253452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253453	-	ELM99253453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253461	-	ELM99253461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253462	-	ELM99253462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253463	-	ELM99253463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253471	-	ELM99253471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253472	-	ELM99253472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253473	-	ELM99253473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253481	-	ELM99253481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253482	-	ELM99253482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253483	-	ELM99253483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253491	-	ELM99253491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253492	-	ELM99253492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253493	-	ELM99253493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253501	-	ELM99253501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253502	-	ELM99253502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253503	-	ELM99253503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253511	-	ELM99253511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253512	-	ELM99253512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253513	-	ELM99253513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253521	-	ELM99253521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253522	-	ELM99253522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253523	-	ELM99253523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253531	-	ELM99253531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253532	-	ELM99253532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253533	-	ELM99253533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253541	-	ELM99253541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253542	-	ELM99253542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253543	-	ELM99253543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253551	-	ELM99253551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253552	-	ELM99253552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253553	-	ELM99253553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253561	-	ELM99253561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253562	-	ELM99253562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253563	-	ELM99253563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253571	-	ELM99253571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253572	-	ELM99253572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253573	-	ELM99253573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253581	-	ELM99253581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253582	-	ELM99253582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253583	-	ELM99253583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253591	-	ELM99253591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253592	-	ELM99253592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253593	-	ELM99253593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99253601	-	ELM99253601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99253602	-	ELM99253602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99253603	-	ELM99253603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99261181	-	ELM99261181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261182	-	ELM99261182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261183	-	ELM99261183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261191	-	ELM99261191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261192	-	ELM99261192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261193	-	ELM99261193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261201	-	ELM99261201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261202	-	ELM99261202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99261203	-	ELM99261203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261211	-	ELM99261211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261212	-	ELM99261212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261213	-	ELM99261213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261221	-	ELM99261221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261222	-	ELM99261222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261223	-	ELM99261223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261231	-	ELM99261231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261232	-	ELM99261232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261233	-	ELM99261233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261241	-	ELM99261241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261242	-	ELM99261242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261243	-	ELM99261243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261251	-	ELM99261251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261252	-	ELM99261252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261253	-	ELM99261253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261261	-	ELM99261261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261262	-	ELM99261262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261263	-	ELM99261263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261271	-	ELM99261271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261272	-	ELM99261272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261273	-	ELM99261273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261281	-	ELM99261281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261282	-	ELM99261282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261283	-	ELM99261283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261291	-	ELM99261291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261292	-	ELM99261292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261293	-	ELM99261293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261301	-	ELM99261301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261302	-	ELM99261302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261303	-	ELM99261303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261311	-	ELM99261311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261312	-	ELM99261312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261313	-	ELM99261313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261321	-	ELM99261321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261322	-	ELM99261322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261323	-	ELM99261323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261331	-	ELM99261331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261332	-	ELM99261332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261333	-	ELM99261333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261341	-	ELM99261341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261342	-	ELM99261342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261343	-	ELM99261343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261351	-	ELM99261351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261352	-	ELM99261352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261353	-	ELM99261353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261361	-	ELM99261361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261362	-	ELM99261362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261363	-	ELM99261363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261371	-	ELM99261371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261372	-	ELM99261372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261373	-	ELM99261373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261381	-	ELM99261381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261382	-	ELM99261382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261383	-	ELM99261383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261391	-	ELM99261391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261392	-	ELM99261392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261393	-	ELM99261393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261401	-	ELM99261401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261402	-	ELM99261402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261403	-	ELM99261403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261411	-	ELM99261411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261412	-	ELM99261412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261413	-	ELM99261413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261421	-	ELM99261421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261422	-	ELM99261422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261423	-	ELM99261423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261431	-	ELM99261431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261432	-	ELM99261432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261433	-	ELM99261433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99261441	-	ELM99261441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261442	-	ELM99261442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261443	-	ELM99261443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261451	-	ELM99261451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261452	-	ELM99261452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261453	-	ELM99261453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261461	-	ELM99261461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261462	-	ELM99261462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261463	-	ELM99261463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261471	-	ELM99261471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261472	-	ELM99261472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261473	-	ELM99261473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261481	-	ELM99261481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261482	-	ELM99261482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261483	-	ELM99261483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261491	-	ELM99261491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261492	-	ELM99261492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261493	-	ELM99261493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261501	-	ELM99261501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261502	-	ELM99261502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261503	-	ELM99261503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261511	-	ELM99261511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261512	-	ELM99261512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261513	-	ELM99261513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261521	-	ELM99261521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261522	-	ELM99261522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261523	-	ELM99261523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261531	-	ELM99261531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261532	-	ELM99261532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261533	-	ELM99261533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261541	-	ELM99261541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261542	-	ELM99261542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261543	-	ELM99261543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261551	-	ELM99261551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261552	-	ELM99261552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261553	-	ELM99261553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261561	-	ELM99261561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261562	-	ELM99261562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261563	-	ELM99261563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261571	-	ELM99261571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261572	-	ELM99261572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261573	-	ELM99261573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261581	-	ELM99261581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261582	-	ELM99261582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261583	-	ELM99261583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261591	-	ELM99261591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261592	-	ELM99261592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261593	-	ELM99261593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99261601	-	ELM99261601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99261602	-	ELM99261602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99261603	-	ELM99261603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99262181	-	ELM99262181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262182	-	ELM99262182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262183	-	ELM99262183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262191	-	ELM99262191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262192	-	ELM99262192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262193	-	ELM99262193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262201	-	ELM99262201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262202	-	ELM99262202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262203	-	ELM99262203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262211	-	ELM99262211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262212	-	ELM99262212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262213	-	ELM99262213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262221	-	ELM99262221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262222	-	ELM99262222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262223	-	ELM99262223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262231	-	ELM99262231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262232	-	ELM99262232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262233	-	ELM99262233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262241	-	ELM99262241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99262242	-	ELM99262242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262243	-	ELM99262243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262251	-	ELM99262251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262252	-	ELM99262252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262253	-	ELM99262253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262261	-	ELM99262261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262262	-	ELM99262262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262263	-	ELM99262263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262271	-	ELM99262271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262272	-	ELM99262272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262273	-	ELM99262273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262281	-	ELM99262281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262282	-	ELM99262282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262283	-	ELM99262283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262291	-	ELM99262291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262292	-	ELM99262292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262293	-	ELM99262293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262301	-	ELM99262301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262302	-	ELM99262302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262303	-	ELM99262303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262311	-	ELM99262311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262312	-	ELM99262312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262313	-	ELM99262313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262321	-	ELM99262321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262322	-	ELM99262322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262323	-	ELM99262323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262331	-	ELM99262331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262332	-	ELM99262332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262333	-	ELM99262333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262341	-	ELM99262341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262342	-	ELM99262342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262343	-	ELM99262343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262351	-	ELM99262351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262352	-	ELM99262352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262353	-	ELM99262353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262361	-	ELM99262361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262362	-	ELM99262362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262363	-	ELM99262363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262371	-	ELM99262371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262372	-	ELM99262372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262373	-	ELM99262373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262381	-	ELM99262381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262382	-	ELM99262382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262383	-	ELM99262383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262391	-	ELM99262391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262392	-	ELM99262392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262393	-	ELM99262393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262401	-	ELM99262401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262402	-	ELM99262402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262403	-	ELM99262403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262411	-	ELM99262411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262412	-	ELM99262412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262413	-	ELM99262413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262421	-	ELM99262421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262422	-	ELM99262422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262423	-	ELM99262423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262431	-	ELM99262431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262432	-	ELM99262432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262433	-	ELM99262433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262441	-	ELM99262441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262442	-	ELM99262442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262443	-	ELM99262443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262451	-	ELM99262451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262452	-	ELM99262452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262453	-	ELM99262453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262461	-	ELM99262461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262462	-	ELM99262462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262463	-	ELM99262463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262471	-	ELM99262471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262472	-	ELM99262472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99262473	-	ELM99262473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262481	-	ELM99262481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262482	-	ELM99262482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262483	-	ELM99262483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262491	-	ELM99262491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262492	-	ELM99262492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262493	-	ELM99262493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262501	-	ELM99262501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262502	-	ELM99262502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262503	-	ELM99262503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262511	-	ELM99262511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262512	-	ELM99262512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262513	-	ELM99262513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262521	-	ELM99262521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262522	-	ELM99262522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262523	-	ELM99262523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262531	-	ELM99262531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262532	-	ELM99262532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262533	-	ELM99262533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262541	-	ELM99262541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262542	-	ELM99262542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262543	-	ELM99262543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262551	-	ELM99262551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262552	-	ELM99262552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262553	-	ELM99262553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262561	-	ELM99262561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262562	-	ELM99262562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262563	-	ELM99262563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262571	-	ELM99262571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262572	-	ELM99262572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262573	-	ELM99262573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262581	-	ELM99262581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262582	-	ELM99262582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262583	-	ELM99262583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262591	-	ELM99262591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262592	-	ELM99262592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262593	-	ELM99262593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99262601	-	ELM99262601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99262602	-	ELM99262602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99262603	-	ELM99262603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263181	-	ELM99263181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263182	-	ELM99263182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263183	-	ELM99263183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263191	-	ELM99263191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263192	-	ELM99263192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263193	-	ELM99263193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263201	-	ELM99263201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263202	-	ELM99263202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263203	-	ELM99263203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263211	-	ELM99263211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263212	-	ELM99263212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263213	-	ELM99263213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263221	-	ELM99263221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263222	-	ELM99263222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263223	-	ELM99263223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263231	-	ELM99263231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263232	-	ELM99263232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263233	-	ELM99263233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263241	-	ELM99263241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263242	-	ELM99263242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263243	-	ELM99263243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263251	-	ELM99263251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263252	-	ELM99263252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263253	-	ELM99263253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263261	-	ELM99263261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263262	-	ELM99263262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263263	-	ELM99263263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263271	-	ELM99263271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263272	-	ELM99263272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263273	-	ELM99263273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99263281	-	ELM99263281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263282	-	ELM99263282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263283	-	ELM99263283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263291	-	ELM99263291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263292	-	ELM99263292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263293	-	ELM99263293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263301	-	ELM99263301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263302	-	ELM99263302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263303	-	ELM99263303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263311	-	ELM99263311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263312	-	ELM99263312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263313	-	ELM99263313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263321	-	ELM99263321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263322	-	ELM99263322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263323	-	ELM99263323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263331	-	ELM99263331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263332	-	ELM99263332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263333	-	ELM99263333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263341	-	ELM99263341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263342	-	ELM99263342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263343	-	ELM99263343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263351	-	ELM99263351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263352	-	ELM99263352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263353	-	ELM99263353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263361	-	ELM99263361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263362	-	ELM99263362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263363	-	ELM99263363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263371	-	ELM99263371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263372	-	ELM99263372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263373	-	ELM99263373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263381	-	ELM99263381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263382	-	ELM99263382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263383	-	ELM99263383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263391	-	ELM99263391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263392	-	ELM99263392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263393	-	ELM99263393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263401	-	ELM99263401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263402	-	ELM99263402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263403	-	ELM99263403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263411	-	ELM99263411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263412	-	ELM99263412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263413	-	ELM99263413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263421	-	ELM99263421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263422	-	ELM99263422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263423	-	ELM99263423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263431	-	ELM99263431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263432	-	ELM99263432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263433	-	ELM99263433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263441	-	ELM99263441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263442	-	ELM99263442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263443	-	ELM99263443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263451	-	ELM99263451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263452	-	ELM99263452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263453	-	ELM99263453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263461	-	ELM99263461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263462	-	ELM99263462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263463	-	ELM99263463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263471	-	ELM99263471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263472	-	ELM99263472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263473	-	ELM99263473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263481	-	ELM99263481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263482	-	ELM99263482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263483	-	ELM99263483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263491	-	ELM99263491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263492	-	ELM99263492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263493	-	ELM99263493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263501	-	ELM99263501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263502	-	ELM99263502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263503	-	ELM99263503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263511	-	ELM99263511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99263512	-	ELM99263512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263513	-	ELM99263513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263521	-	ELM99263521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263522	-	ELM99263522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263523	-	ELM99263523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263531	-	ELM99263531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263532	-	ELM99263532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263533	-	ELM99263533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263541	-	ELM99263541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263542	-	ELM99263542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263543	-	ELM99263543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263551	-	ELM99263551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263552	-	ELM99263552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263553	-	ELM99263553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263561	-	ELM99263561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263562	-	ELM99263562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263563	-	ELM99263563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263571	-	ELM99263571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263572	-	ELM99263572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263573	-	ELM99263573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263581	-	ELM99263581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263582	-	ELM99263582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263583	-	ELM99263583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263591	-	ELM99263591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263592	-	ELM99263592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263593	-	ELM99263593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99263601	-	ELM99263601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99263602	-	ELM99263602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99263603	-	ELM99263603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99271181	-	ELM99271181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271182	-	ELM99271182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271183	-	ELM99271183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271191	-	ELM99271191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271192	-	ELM99271192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271193	-	ELM99271193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271201	-	ELM99271201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271202	-	ELM99271202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271203	-	ELM99271203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271211	-	ELM99271211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271212	-	ELM99271212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271213	-	ELM99271213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271221	-	ELM99271221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271222	-	ELM99271222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271223	-	ELM99271223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271231	-	ELM99271231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271232	-	ELM99271232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271233	-	ELM99271233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271241	-	ELM99271241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271242	-	ELM99271242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271243	-	ELM99271243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271251	-	ELM99271251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271252	-	ELM99271252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271253	-	ELM99271253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271261	-	ELM99271261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271262	-	ELM99271262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271263	-	ELM99271263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271271	-	ELM99271271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271272	-	ELM99271272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271273	-	ELM99271273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271281	-	ELM99271281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271282	-	ELM99271282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271283	-	ELM99271283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271291	-	ELM99271291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271292	-	ELM99271292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271293	-	ELM99271293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271301	-	ELM99271301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271302	-	ELM99271302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271303	-	ELM99271303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271311	-	ELM99271311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271312	-	ELM99271312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99271313	-	ELM99271313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271321	-	ELM99271321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271322	-	ELM99271322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271323	-	ELM99271323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271331	-	ELM99271331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271332	-	ELM99271332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271333	-	ELM99271333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271341	-	ELM99271341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271342	-	ELM99271342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271343	-	ELM99271343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271351	-	ELM99271351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271352	-	ELM99271352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271353	-	ELM99271353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271361	-	ELM99271361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271362	-	ELM99271362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271363	-	ELM99271363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271371	-	ELM99271371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271372	-	ELM99271372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271373	-	ELM99271373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271381	-	ELM99271381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271382	-	ELM99271382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271383	-	ELM99271383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271391	-	ELM99271391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271392	-	ELM99271392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271393	-	ELM99271393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271401	-	ELM99271401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271402	-	ELM99271402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271403	-	ELM99271403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271411	-	ELM99271411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271412	-	ELM99271412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271413	-	ELM99271413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271421	-	ELM99271421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271422	-	ELM99271422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271423	-	ELM99271423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271431	-	ELM99271431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271432	-	ELM99271432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271433	-	ELM99271433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271441	-	ELM99271441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271442	-	ELM99271442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271443	-	ELM99271443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271451	-	ELM99271451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271452	-	ELM99271452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271453	-	ELM99271453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271461	-	ELM99271461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271462	-	ELM99271462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271463	-	ELM99271463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271471	-	ELM99271471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271472	-	ELM99271472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271473	-	ELM99271473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271481	-	ELM99271481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271482	-	ELM99271482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271483	-	ELM99271483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271491	-	ELM99271491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271492	-	ELM99271492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271493	-	ELM99271493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271501	-	ELM99271501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271502	-	ELM99271502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271503	-	ELM99271503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271511	-	ELM99271511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271512	-	ELM99271512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271513	-	ELM99271513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271521	-	ELM99271521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271522	-	ELM99271522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271523	-	ELM99271523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271531	-	ELM99271531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271532	-	ELM99271532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271533	-	ELM99271533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271541	-	ELM99271541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271542	-	ELM99271542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271543	-	ELM99271543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99271551	-	ELM99271551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271552	-	ELM99271552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271553	-	ELM99271553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271561	-	ELM99271561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271562	-	ELM99271562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271563	-	ELM99271563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271571	-	ELM99271571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271572	-	ELM99271572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271573	-	ELM99271573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271581	-	ELM99271581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271582	-	ELM99271582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271583	-	ELM99271583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271591	-	ELM99271591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271592	-	ELM99271592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271593	-	ELM99271593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99271601	-	ELM99271601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99271602	-	ELM99271602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99271603	-	ELM99271603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99272181	-	ELM99272181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272182	-	ELM99272182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272183	-	ELM99272183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272191	-	ELM99272191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272192	-	ELM99272192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272193	-	ELM99272193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272201	-	ELM99272201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272202	-	ELM99272202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272203	-	ELM99272203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272211	-	ELM99272211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272212	-	ELM99272212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272213	-	ELM99272213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272221	-	ELM99272221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272222	-	ELM99272222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272223	-	ELM99272223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272231	-	ELM99272231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272232	-	ELM99272232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272233	-	ELM99272233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272241	-	ELM99272241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272242	-	ELM99272242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272243	-	ELM99272243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272251	-	ELM99272251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272252	-	ELM99272252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272253	-	ELM99272253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272261	-	ELM99272261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272262	-	ELM99272262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272263	-	ELM99272263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272271	-	ELM99272271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272272	-	ELM99272272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272273	-	ELM99272273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272281	-	ELM99272281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272282	-	ELM99272282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272283	-	ELM99272283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272291	-	ELM99272291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272292	-	ELM99272292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272293	-	ELM99272293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272301	-	ELM99272301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272302	-	ELM99272302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272303	-	ELM99272303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272311	-	ELM99272311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272312	-	ELM99272312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272313	-	ELM99272313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272321	-	ELM99272321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272322	-	ELM99272322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272323	-	ELM99272323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272331	-	ELM99272331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272332	-	ELM99272332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272333	-	ELM99272333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272341	-	ELM99272341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272342	-	ELM99272342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272343	-	ELM99272343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272351	-	ELM99272351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99272352	-	ELM99272352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272353	-	ELM99272353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272361	-	ELM99272361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272362	-	ELM99272362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272363	-	ELM99272363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272371	-	ELM99272371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272372	-	ELM99272372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272373	-	ELM99272373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272381	-	ELM99272381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272382	-	ELM99272382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272383	-	ELM99272383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272391	-	ELM99272391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272392	-	ELM99272392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272393	-	ELM99272393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272401	-	ELM99272401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272402	-	ELM99272402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272403	-	ELM99272403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272411	-	ELM99272411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272412	-	ELM99272412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272413	-	ELM99272413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272421	-	ELM99272421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272422	-	ELM99272422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272423	-	ELM99272423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272431	-	ELM99272431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272432	-	ELM99272432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272433	-	ELM99272433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272441	-	ELM99272441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272442	-	ELM99272442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272443	-	ELM99272443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272451	-	ELM99272451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272452	-	ELM99272452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272453	-	ELM99272453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272461	-	ELM99272461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272462	-	ELM99272462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272463	-	ELM99272463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272471	-	ELM99272471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272472	-	ELM99272472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272473	-	ELM99272473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272481	-	ELM99272481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272482	-	ELM99272482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272483	-	ELM99272483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272491	-	ELM99272491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272492	-	ELM99272492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272493	-	ELM99272493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272501	-	ELM99272501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272502	-	ELM99272502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272503	-	ELM99272503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272511	-	ELM99272511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272512	-	ELM99272512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272513	-	ELM99272513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272521	-	ELM99272521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272522	-	ELM99272522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272523	-	ELM99272523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272531	-	ELM99272531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272532	-	ELM99272532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272533	-	ELM99272533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272541	-	ELM99272541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272542	-	ELM99272542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272543	-	ELM99272543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272551	-	ELM99272551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272552	-	ELM99272552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272553	-	ELM99272553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272561	-	ELM99272561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272562	-	ELM99272562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272563	-	ELM99272563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272571	-	ELM99272571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272572	-	ELM99272572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272573	-	ELM99272573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272581	-	ELM99272581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272582	-	ELM99272582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99272583	-	ELM99272583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272591	-	ELM99272591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272592	-	ELM99272592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272593	-	ELM99272593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99272601	-	ELM99272601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99272602	-	ELM99272602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99272603	-	ELM99272603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273181	-	ELM99273181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273182	-	ELM99273182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273183	-	ELM99273183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273191	-	ELM99273191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273192	-	ELM99273192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273193	-	ELM99273193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273201	-	ELM99273201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273202	-	ELM99273202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273203	-	ELM99273203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273211	-	ELM99273211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273212	-	ELM99273212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273213	-	ELM99273213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273221	-	ELM99273221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273222	-	ELM99273222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273223	-	ELM99273223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273231	-	ELM99273231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273232	-	ELM99273232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273233	-	ELM99273233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273241	-	ELM99273241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273242	-	ELM99273242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273243	-	ELM99273243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273251	-	ELM99273251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273252	-	ELM99273252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273253	-	ELM99273253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273261	-	ELM99273261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273262	-	ELM99273262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273263	-	ELM99273263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273271	-	ELM99273271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273272	-	ELM99273272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273273	-	ELM99273273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273281	-	ELM99273281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273282	-	ELM99273282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273283	-	ELM99273283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273291	-	ELM99273291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273292	-	ELM99273292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273293	-	ELM99273293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273301	-	ELM99273301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273302	-	ELM99273302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273303	-	ELM99273303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273311	-	ELM99273311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273312	-	ELM99273312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273313	-	ELM99273313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273321	-	ELM99273321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273322	-	ELM99273322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273323	-	ELM99273323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273331	-	ELM99273331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273332	-	ELM99273332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273333	-	ELM99273333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273341	-	ELM99273341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273342	-	ELM99273342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273343	-	ELM99273343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273351	-	ELM99273351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273352	-	ELM99273352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273353	-	ELM99273353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273361	-	ELM99273361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273362	-	ELM99273362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273363	-	ELM99273363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273371	-	ELM99273371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273372	-	ELM99273372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273373	-	ELM99273373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273381	-	ELM99273381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273382	-	ELM99273382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273383	-	ELM99273383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99273391	-	ELM99273391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273392	-	ELM99273392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273393	-	ELM99273393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273401	-	ELM99273401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273402	-	ELM99273402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273403	-	ELM99273403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273411	-	ELM99273411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273412	-	ELM99273412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273413	-	ELM99273413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273421	-	ELM99273421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273422	-	ELM99273422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273423	-	ELM99273423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273431	-	ELM99273431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273432	-	ELM99273432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273433	-	ELM99273433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273441	-	ELM99273441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273442	-	ELM99273442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273443	-	ELM99273443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273451	-	ELM99273451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273452	-	ELM99273452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273453	-	ELM99273453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273461	-	ELM99273461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273462	-	ELM99273462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273463	-	ELM99273463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273471	-	ELM99273471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273472	-	ELM99273472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273473	-	ELM99273473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273481	-	ELM99273481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273482	-	ELM99273482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273483	-	ELM99273483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273491	-	ELM99273491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273492	-	ELM99273492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273493	-	ELM99273493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273501	-	ELM99273501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273502	-	ELM99273502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273503	-	ELM99273503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273511	-	ELM99273511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273512	-	ELM99273512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273513	-	ELM99273513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273521	-	ELM99273521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273522	-	ELM99273522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273523	-	ELM99273523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273531	-	ELM99273531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273532	-	ELM99273532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273533	-	ELM99273533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273541	-	ELM99273541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273542	-	ELM99273542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273543	-	ELM99273543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273551	-	ELM99273551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273552	-	ELM99273552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273553	-	ELM99273553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273561	-	ELM99273561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273562	-	ELM99273562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273563	-	ELM99273563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273571	-	ELM99273571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273572	-	ELM99273572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273573	-	ELM99273573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273581	-	ELM99273581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273582	-	ELM99273582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273583	-	ELM99273583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273591	-	ELM99273591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273592	-	ELM99273592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273593	-	ELM99273593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99273601	-	ELM99273601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99273602	-	ELM99273602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99273603	-	ELM99273603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99281181	-	ELM99281181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281182	-	ELM99281182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281183	-	ELM99281183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281191	-	ELM99281191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99281192	-	ELM99281192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281193	-	ELM99281193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281201	-	ELM99281201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281202	-	ELM99281202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281203	-	ELM99281203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281211	-	ELM99281211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281212	-	ELM99281212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281213	-	ELM99281213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281221	-	ELM99281221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281222	-	ELM99281222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281223	-	ELM99281223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281231	-	ELM99281231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281232	-	ELM99281232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281233	-	ELM99281233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281241	-	ELM99281241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281242	-	ELM99281242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281243	-	ELM99281243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281251	-	ELM99281251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281252	-	ELM99281252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281253	-	ELM99281253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281261	-	ELM99281261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281262	-	ELM99281262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281263	-	ELM99281263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281271	-	ELM99281271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281272	-	ELM99281272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281273	-	ELM99281273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281281	-	ELM99281281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281282	-	ELM99281282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281283	-	ELM99281283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281291	-	ELM99281291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281292	-	ELM99281292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281293	-	ELM99281293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281301	-	ELM99281301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281302	-	ELM99281302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281303	-	ELM99281303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281311	-	ELM99281311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281312	-	ELM99281312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281313	-	ELM99281313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281321	-	ELM99281321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281322	-	ELM99281322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281323	-	ELM99281323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281331	-	ELM99281331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281332	-	ELM99281332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281333	-	ELM99281333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281341	-	ELM99281341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281342	-	ELM99281342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281343	-	ELM99281343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281351	-	ELM99281351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281352	-	ELM99281352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281353	-	ELM99281353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281361	-	ELM99281361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281362	-	ELM99281362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281363	-	ELM99281363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281371	-	ELM99281371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281372	-	ELM99281372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281373	-	ELM99281373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281381	-	ELM99281381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281382	-	ELM99281382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281383	-	ELM99281383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281391	-	ELM99281391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281392	-	ELM99281392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281393	-	ELM99281393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281401	-	ELM99281401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281402	-	ELM99281402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281403	-	ELM99281403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281411	-	ELM99281411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281412	-	ELM99281412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281413	-	ELM99281413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281421	-	ELM99281421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281422	-	ELM99281422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99281423	-	ELM99281423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281431	-	ELM99281431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281432	-	ELM99281432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281433	-	ELM99281433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281441	-	ELM99281441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281442	-	ELM99281442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281443	-	ELM99281443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281451	-	ELM99281451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281452	-	ELM99281452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281453	-	ELM99281453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281461	-	ELM99281461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281462	-	ELM99281462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281463	-	ELM99281463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281471	-	ELM99281471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281472	-	ELM99281472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281473	-	ELM99281473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281481	-	ELM99281481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281482	-	ELM99281482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281483	-	ELM99281483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281491	-	ELM99281491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281492	-	ELM99281492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281493	-	ELM99281493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281501	-	ELM99281501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281502	-	ELM99281502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281503	-	ELM99281503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281511	-	ELM99281511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281512	-	ELM99281512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281513	-	ELM99281513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281521	-	ELM99281521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281522	-	ELM99281522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281523	-	ELM99281523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281531	-	ELM99281531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281532	-	ELM99281532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281533	-	ELM99281533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281541	-	ELM99281541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281542	-	ELM99281542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281543	-	ELM99281543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281551	-	ELM99281551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281552	-	ELM99281552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281553	-	ELM99281553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281561	-	ELM99281561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281562	-	ELM99281562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281563	-	ELM99281563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281571	-	ELM99281571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281572	-	ELM99281572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281573	-	ELM99281573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281581	-	ELM99281581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281582	-	ELM99281582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281583	-	ELM99281583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281591	-	ELM99281591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281592	-	ELM99281592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281593	-	ELM99281593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99281601	-	ELM99281601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99281602	-	ELM99281602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99281603	-	ELM99281603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99282181	-	ELM99282181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282182	-	ELM99282182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282183	-	ELM99282183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282191	-	ELM99282191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282192	-	ELM99282192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282193	-	ELM99282193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282201	-	ELM99282201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282202	-	ELM99282202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282203	-	ELM99282203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282211	-	ELM99282211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282212	-	ELM99282212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282213	-	ELM99282213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282221	-	ELM99282221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282222	-	ELM99282222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282223	-	ELM99282223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99282231	-	ELM99282231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282232	-	ELM99282232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282233	-	ELM99282233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282241	-	ELM99282241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282242	-	ELM99282242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282243	-	ELM99282243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282251	-	ELM99282251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282252	-	ELM99282252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282253	-	ELM99282253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282261	-	ELM99282261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282262	-	ELM99282262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282263	-	ELM99282263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282271	-	ELM99282271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282272	-	ELM99282272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282273	-	ELM99282273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282281	-	ELM99282281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282282	-	ELM99282282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282283	-	ELM99282283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282291	-	ELM99282291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282292	-	ELM99282292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282293	-	ELM99282293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282301	-	ELM99282301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282302	-	ELM99282302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282303	-	ELM99282303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282311	-	ELM99282311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282312	-	ELM99282312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282313	-	ELM99282313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282321	-	ELM99282321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282322	-	ELM99282322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282323	-	ELM99282323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282331	-	ELM99282331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282332	-	ELM99282332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282333	-	ELM99282333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282341	-	ELM99282341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282342	-	ELM99282342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282343	-	ELM99282343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282351	-	ELM99282351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282352	-	ELM99282352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282353	-	ELM99282353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282361	-	ELM99282361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282362	-	ELM99282362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282363	-	ELM99282363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282371	-	ELM99282371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282372	-	ELM99282372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282373	-	ELM99282373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282381	-	ELM99282381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282382	-	ELM99282382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282383	-	ELM99282383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282391	-	ELM99282391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282392	-	ELM99282392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282393	-	ELM99282393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282401	-	ELM99282401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282402	-	ELM99282402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282403	-	ELM99282403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282411	-	ELM99282411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282412	-	ELM99282412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282413	-	ELM99282413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282421	-	ELM99282421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282422	-	ELM99282422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282423	-	ELM99282423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282431	-	ELM99282431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282432	-	ELM99282432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282433	-	ELM99282433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282441	-	ELM99282441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282442	-	ELM99282442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282443	-	ELM99282443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282451	-	ELM99282451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282452	-	ELM99282452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282453	-	ELM99282453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282461	-	ELM99282461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99282462	-	ELM99282462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282463	-	ELM99282463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282471	-	ELM99282471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282472	-	ELM99282472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282473	-	ELM99282473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282481	-	ELM99282481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282482	-	ELM99282482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282483	-	ELM99282483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282491	-	ELM99282491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282492	-	ELM99282492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282493	-	ELM99282493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282501	-	ELM99282501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282502	-	ELM99282502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282503	-	ELM99282503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282511	-	ELM99282511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282512	-	ELM99282512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282513	-	ELM99282513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282521	-	ELM99282521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282522	-	ELM99282522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282523	-	ELM99282523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282531	-	ELM99282531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282532	-	ELM99282532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282533	-	ELM99282533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282541	-	ELM99282541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282542	-	ELM99282542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282543	-	ELM99282543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282551	-	ELM99282551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282552	-	ELM99282552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282553	-	ELM99282553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282561	-	ELM99282561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282562	-	ELM99282562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282563	-	ELM99282563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282571	-	ELM99282571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282572	-	ELM99282572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282573	-	ELM99282573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282581	-	ELM99282581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282582	-	ELM99282582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282583	-	ELM99282583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282591	-	ELM99282591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282592	-	ELM99282592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282593	-	ELM99282593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99282601	-	ELM99282601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99282602	-	ELM99282602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99282603	-	ELM99282603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283181	-	ELM99283181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283182	-	ELM99283182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283183	-	ELM99283183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283191	-	ELM99283191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283192	-	ELM99283192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283193	-	ELM99283193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283201	-	ELM99283201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283202	-	ELM99283202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283203	-	ELM99283203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283211	-	ELM99283211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283212	-	ELM99283212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283213	-	ELM99283213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283221	-	ELM99283221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283222	-	ELM99283222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283223	-	ELM99283223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283231	-	ELM99283231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283232	-	ELM99283232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283233	-	ELM99283233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283241	-	ELM99283241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283242	-	ELM99283242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283243	-	ELM99283243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283251	-	ELM99283251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283252	-	ELM99283252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283253	-	ELM99283253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283261	-	ELM99283261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283262	-	ELM99283262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99283263	-	ELM99283263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283271	-	ELM99283271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283272	-	ELM99283272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283273	-	ELM99283273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283281	-	ELM99283281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283282	-	ELM99283282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283283	-	ELM99283283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283291	-	ELM99283291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283292	-	ELM99283292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283293	-	ELM99283293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283301	-	ELM99283301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283302	-	ELM99283302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283303	-	ELM99283303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283311	-	ELM99283311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283312	-	ELM99283312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283313	-	ELM99283313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283321	-	ELM99283321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283322	-	ELM99283322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283323	-	ELM99283323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283331	-	ELM99283331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283332	-	ELM99283332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283333	-	ELM99283333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283341	-	ELM99283341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283342	-	ELM99283342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283343	-	ELM99283343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283351	-	ELM99283351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283352	-	ELM99283352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283353	-	ELM99283353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283361	-	ELM99283361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283362	-	ELM99283362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283363	-	ELM99283363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283371	-	ELM99283371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283372	-	ELM99283372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283373	-	ELM99283373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283381	-	ELM99283381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283382	-	ELM99283382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283383	-	ELM99283383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283391	-	ELM99283391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283392	-	ELM99283392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283393	-	ELM99283393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283401	-	ELM99283401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283402	-	ELM99283402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283403	-	ELM99283403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283411	-	ELM99283411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283412	-	ELM99283412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283413	-	ELM99283413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283421	-	ELM99283421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283422	-	ELM99283422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283423	-	ELM99283423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283431	-	ELM99283431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283432	-	ELM99283432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283433	-	ELM99283433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283441	-	ELM99283441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283442	-	ELM99283442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283443	-	ELM99283443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283451	-	ELM99283451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283452	-	ELM99283452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283453	-	ELM99283453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283461	-	ELM99283461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283462	-	ELM99283462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283463	-	ELM99283463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283471	-	ELM99283471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283472	-	ELM99283472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283473	-	ELM99283473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283481	-	ELM99283481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283482	-	ELM99283482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283483	-	ELM99283483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283491	-	ELM99283491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283492	-	ELM99283492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283493	-	ELM99283493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99283501	-	ELM99283501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283502	-	ELM99283502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283503	-	ELM99283503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283511	-	ELM99283511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283512	-	ELM99283512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283513	-	ELM99283513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283521	-	ELM99283521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283522	-	ELM99283522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283523	-	ELM99283523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283531	-	ELM99283531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283532	-	ELM99283532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283533	-	ELM99283533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283541	-	ELM99283541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283542	-	ELM99283542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283543	-	ELM99283543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283551	-	ELM99283551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283552	-	ELM99283552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283553	-	ELM99283553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283561	-	ELM99283561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283562	-	ELM99283562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283563	-	ELM99283563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283571	-	ELM99283571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283572	-	ELM99283572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283573	-	ELM99283573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283581	-	ELM99283581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283582	-	ELM99283582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283583	-	ELM99283583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283591	-	ELM99283591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283592	-	ELM99283592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283593	-	ELM99283593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99283601	-	ELM99283601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99283602	-	ELM99283602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99283603	-	ELM99283603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99291181	-	ELM99291181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291182	-	ELM99291182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291183	-	ELM99291183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291191	-	ELM99291191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291192	-	ELM99291192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291193	-	ELM99291193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291201	-	ELM99291201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291202	-	ELM99291202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291203	-	ELM99291203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291211	-	ELM99291211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291212	-	ELM99291212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291213	-	ELM99291213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291221	-	ELM99291221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291222	-	ELM99291222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291223	-	ELM99291223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291231	-	ELM99291231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291232	-	ELM99291232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291233	-	ELM99291233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291241	-	ELM99291241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291242	-	ELM99291242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291243	-	ELM99291243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291251	-	ELM99291251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291252	-	ELM99291252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291253	-	ELM99291253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291261	-	ELM99291261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291262	-	ELM99291262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291263	-	ELM99291263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291271	-	ELM99291271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291272	-	ELM99291272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291273	-	ELM99291273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291281	-	ELM99291281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291282	-	ELM99291282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291283	-	ELM99291283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291291	-	ELM99291291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291292	-	ELM99291292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291293	-	ELM99291293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291301	-	ELM99291301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99291302	-	ELM99291302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291303	-	ELM99291303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291311	-	ELM99291311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291312	-	ELM99291312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291313	-	ELM99291313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291321	-	ELM99291321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291322	-	ELM99291322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291323	-	ELM99291323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291331	-	ELM99291331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291332	-	ELM99291332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291333	-	ELM99291333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291341	-	ELM99291341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291342	-	ELM99291342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291343	-	ELM99291343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291351	-	ELM99291351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291352	-	ELM99291352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291353	-	ELM99291353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291361	-	ELM99291361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291362	-	ELM99291362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291363	-	ELM99291363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291371	-	ELM99291371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291372	-	ELM99291372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291373	-	ELM99291373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291381	-	ELM99291381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291382	-	ELM99291382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291383	-	ELM99291383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291391	-	ELM99291391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291392	-	ELM99291392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291393	-	ELM99291393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291401	-	ELM99291401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291402	-	ELM99291402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291403	-	ELM99291403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291411	-	ELM99291411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291412	-	ELM99291412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291413	-	ELM99291413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291421	-	ELM99291421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291422	-	ELM99291422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291423	-	ELM99291423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291431	-	ELM99291431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291432	-	ELM99291432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291433	-	ELM99291433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291441	-	ELM99291441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291442	-	ELM99291442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291443	-	ELM99291443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291451	-	ELM99291451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291452	-	ELM99291452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291453	-	ELM99291453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291461	-	ELM99291461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291462	-	ELM99291462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291463	-	ELM99291463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291471	-	ELM99291471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291472	-	ELM99291472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291473	-	ELM99291473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291481	-	ELM99291481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291482	-	ELM99291482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291483	-	ELM99291483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291491	-	ELM99291491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291492	-	ELM99291492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291493	-	ELM99291493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291501	-	ELM99291501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291502	-	ELM99291502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291503	-	ELM99291503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291511	-	ELM99291511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291512	-	ELM99291512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291513	-	ELM99291513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291521	-	ELM99291521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291522	-	ELM99291522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291523	-	ELM99291523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291531	-	ELM99291531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291532	-	ELM99291532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99291533	-	ELM99291533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291541	-	ELM99291541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291542	-	ELM99291542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291543	-	ELM99291543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291551	-	ELM99291551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291552	-	ELM99291552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291553	-	ELM99291553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291561	-	ELM99291561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291562	-	ELM99291562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291563	-	ELM99291563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291571	-	ELM99291571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291572	-	ELM99291572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291573	-	ELM99291573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291581	-	ELM99291581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291582	-	ELM99291582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291583	-	ELM99291583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291591	-	ELM99291591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291592	-	ELM99291592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291593	-	ELM99291593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99291601	-	ELM99291601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99291602	-	ELM99291602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99291603	-	ELM99291603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99292181	-	ELM99292181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292182	-	ELM99292182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292183	-	ELM99292183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292191	-	ELM99292191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292192	-	ELM99292192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292193	-	ELM99292193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292201	-	ELM99292201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292202	-	ELM99292202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292203	-	ELM99292203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292211	-	ELM99292211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292212	-	ELM99292212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292213	-	ELM99292213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292221	-	ELM99292221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292222	-	ELM99292222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292223	-	ELM99292223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292231	-	ELM99292231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292232	-	ELM99292232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292233	-	ELM99292233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292241	-	ELM99292241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292242	-	ELM99292242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292243	-	ELM99292243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292251	-	ELM99292251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292252	-	ELM99292252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292253	-	ELM99292253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292261	-	ELM99292261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292262	-	ELM99292262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292263	-	ELM99292263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292271	-	ELM99292271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292272	-	ELM99292272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292273	-	ELM99292273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292281	-	ELM99292281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292282	-	ELM99292282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292283	-	ELM99292283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292291	-	ELM99292291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292292	-	ELM99292292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292293	-	ELM99292293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292301	-	ELM99292301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292302	-	ELM99292302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292303	-	ELM99292303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292311	-	ELM99292311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292312	-	ELM99292312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292313	-	ELM99292313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292321	-	ELM99292321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292322	-	ELM99292322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292323	-	ELM99292323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292331	-	ELM99292331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292332	-	ELM99292332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292333	-	ELM99292333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99292341	-	ELM99292341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292342	-	ELM99292342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292343	-	ELM99292343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292351	-	ELM99292351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292352	-	ELM99292352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292353	-	ELM99292353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292361	-	ELM99292361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292362	-	ELM99292362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292363	-	ELM99292363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292371	-	ELM99292371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292372	-	ELM99292372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292373	-	ELM99292373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292381	-	ELM99292381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292382	-	ELM99292382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292383	-	ELM99292383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292391	-	ELM99292391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292392	-	ELM99292392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292393	-	ELM99292393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292401	-	ELM99292401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292402	-	ELM99292402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292403	-	ELM99292403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292411	-	ELM99292411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292412	-	ELM99292412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292413	-	ELM99292413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292421	-	ELM99292421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292422	-	ELM99292422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292423	-	ELM99292423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292431	-	ELM99292431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292432	-	ELM99292432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292433	-	ELM99292433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292441	-	ELM99292441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292442	-	ELM99292442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292443	-	ELM99292443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292451	-	ELM99292451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292452	-	ELM99292452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292453	-	ELM99292453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292461	-	ELM99292461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292462	-	ELM99292462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292463	-	ELM99292463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292471	-	ELM99292471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292472	-	ELM99292472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292473	-	ELM99292473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292481	-	ELM99292481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292482	-	ELM99292482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292483	-	ELM99292483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292491	-	ELM99292491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292492	-	ELM99292492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292493	-	ELM99292493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292501	-	ELM99292501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292502	-	ELM99292502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292503	-	ELM99292503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292511	-	ELM99292511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292512	-	ELM99292512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292513	-	ELM99292513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292521	-	ELM99292521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292522	-	ELM99292522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292523	-	ELM99292523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292531	-	ELM99292531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292532	-	ELM99292532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292533	-	ELM99292533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292541	-	ELM99292541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292542	-	ELM99292542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292543	-	ELM99292543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292551	-	ELM99292551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292552	-	ELM99292552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292553	-	ELM99292553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292561	-	ELM99292561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292562	-	ELM99292562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292563	-	ELM99292563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292571	-	ELM99292571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99292572	-	ELM99292572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292573	-	ELM99292573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292581	-	ELM99292581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292582	-	ELM99292582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292583	-	ELM99292583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292591	-	ELM99292591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292592	-	ELM99292592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292593	-	ELM99292593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99292601	-	ELM99292601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99292602	-	ELM99292602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99292603	-	ELM99292603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293181	-	ELM99293181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293182	-	ELM99293182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293183	-	ELM99293183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293191	-	ELM99293191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293192	-	ELM99293192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293193	-	ELM99293193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293201	-	ELM99293201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293202	-	ELM99293202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293203	-	ELM99293203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293211	-	ELM99293211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293212	-	ELM99293212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293213	-	ELM99293213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293221	-	ELM99293221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293222	-	ELM99293222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293223	-	ELM99293223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293231	-	ELM99293231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293232	-	ELM99293232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293233	-	ELM99293233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293241	-	ELM99293241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293242	-	ELM99293242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293243	-	ELM99293243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293251	-	ELM99293251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293252	-	ELM99293252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293253	-	ELM99293253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293261	-	ELM99293261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293262	-	ELM99293262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293263	-	ELM99293263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293271	-	ELM99293271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293272	-	ELM99293272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293273	-	ELM99293273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293281	-	ELM99293281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293282	-	ELM99293282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293283	-	ELM99293283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293291	-	ELM99293291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293292	-	ELM99293292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293293	-	ELM99293293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293301	-	ELM99293301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293302	-	ELM99293302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293303	-	ELM99293303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293311	-	ELM99293311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293312	-	ELM99293312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293313	-	ELM99293313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293321	-	ELM99293321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293322	-	ELM99293322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293323	-	ELM99293323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293331	-	ELM99293331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293332	-	ELM99293332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293333	-	ELM99293333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293341	-	ELM99293341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293342	-	ELM99293342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293343	-	ELM99293343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293351	-	ELM99293351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293352	-	ELM99293352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293353	-	ELM99293353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293361	-	ELM99293361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293362	-	ELM99293362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293363	-	ELM99293363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293371	-	ELM99293371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293372	-	ELM99293372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99293373	-	ELM99293373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293381	-	ELM99293381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293382	-	ELM99293382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293383	-	ELM99293383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293391	-	ELM99293391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293392	-	ELM99293392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293393	-	ELM99293393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293401	-	ELM99293401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293402	-	ELM99293402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293403	-	ELM99293403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293411	-	ELM99293411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293412	-	ELM99293412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293413	-	ELM99293413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293421	-	ELM99293421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293422	-	ELM99293422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293423	-	ELM99293423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293431	-	ELM99293431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293432	-	ELM99293432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293433	-	ELM99293433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293441	-	ELM99293441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293442	-	ELM99293442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293443	-	ELM99293443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293451	-	ELM99293451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293452	-	ELM99293452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293453	-	ELM99293453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293461	-	ELM99293461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293462	-	ELM99293462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293463	-	ELM99293463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293471	-	ELM99293471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293472	-	ELM99293472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293473	-	ELM99293473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293481	-	ELM99293481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293482	-	ELM99293482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293483	-	ELM99293483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293491	-	ELM99293491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293492	-	ELM99293492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293493	-	ELM99293493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293501	-	ELM99293501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293502	-	ELM99293502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293503	-	ELM99293503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293511	-	ELM99293511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293512	-	ELM99293512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293513	-	ELM99293513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293521	-	ELM99293521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293522	-	ELM99293522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293523	-	ELM99293523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293531	-	ELM99293531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293532	-	ELM99293532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293533	-	ELM99293533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293541	-	ELM99293541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293542	-	ELM99293542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293543	-	ELM99293543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293551	-	ELM99293551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293552	-	ELM99293552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293553	-	ELM99293553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293561	-	ELM99293561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293562	-	ELM99293562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293563	-	ELM99293563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293571	-	ELM99293571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293572	-	ELM99293572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293573	-	ELM99293573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293581	-	ELM99293581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293582	-	ELM99293582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293583	-	ELM99293583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293591	-	ELM99293591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293592	-	ELM99293592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293593	-	ELM99293593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99293601	-	ELM99293601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99293602	-	ELM99293602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99293603	-	ELM99293603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99301181	-	ELM99301181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301182	-	ELM99301182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301183	-	ELM99301183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301191	-	ELM99301191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301192	-	ELM99301192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301193	-	ELM99301193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301201	-	ELM99301201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301202	-	ELM99301202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301203	-	ELM99301203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301211	-	ELM99301211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301212	-	ELM99301212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301213	-	ELM99301213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301221	-	ELM99301221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301222	-	ELM99301222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301223	-	ELM99301223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301231	-	ELM99301231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301232	-	ELM99301232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301233	-	ELM99301233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301241	-	ELM99301241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301242	-	ELM99301242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301243	-	ELM99301243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301251	-	ELM99301251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301252	-	ELM99301252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301253	-	ELM99301253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301261	-	ELM99301261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301262	-	ELM99301262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301263	-	ELM99301263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301271	-	ELM99301271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301272	-	ELM99301272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301273	-	ELM99301273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301281	-	ELM99301281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301282	-	ELM99301282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301283	-	ELM99301283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301291	-	ELM99301291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301292	-	ELM99301292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301293	-	ELM99301293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301301	-	ELM99301301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301302	-	ELM99301302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301303	-	ELM99301303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301311	-	ELM99301311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301312	-	ELM99301312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301313	-	ELM99301313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301321	-	ELM99301321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301322	-	ELM99301322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301323	-	ELM99301323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301331	-	ELM99301331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301332	-	ELM99301332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301333	-	ELM99301333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301341	-	ELM99301341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301342	-	ELM99301342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301343	-	ELM99301343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301351	-	ELM99301351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301352	-	ELM99301352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301353	-	ELM99301353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301361	-	ELM99301361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301362	-	ELM99301362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301363	-	ELM99301363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301371	-	ELM99301371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301372	-	ELM99301372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301373	-	ELM99301373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301381	-	ELM99301381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301382	-	ELM99301382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301383	-	ELM99301383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301391	-	ELM99301391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301392	-	ELM99301392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301393	-	ELM99301393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301401	-	ELM99301401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301402	-	ELM99301402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301403	-	ELM99301403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301411	-	ELM99301411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99301412	-	ELM99301412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301413	-	ELM99301413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301421	-	ELM99301421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301422	-	ELM99301422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301423	-	ELM99301423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301431	-	ELM99301431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301432	-	ELM99301432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301433	-	ELM99301433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301441	-	ELM99301441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301442	-	ELM99301442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301443	-	ELM99301443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301451	-	ELM99301451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301452	-	ELM99301452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301453	-	ELM99301453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301461	-	ELM99301461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301462	-	ELM99301462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301463	-	ELM99301463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301471	-	ELM99301471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301472	-	ELM99301472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301473	-	ELM99301473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301481	-	ELM99301481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301482	-	ELM99301482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301483	-	ELM99301483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301491	-	ELM99301491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301492	-	ELM99301492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301493	-	ELM99301493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301501	-	ELM99301501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301502	-	ELM99301502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301503	-	ELM99301503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301511	-	ELM99301511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301512	-	ELM99301512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301513	-	ELM99301513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301521	-	ELM99301521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301522	-	ELM99301522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301523	-	ELM99301523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301531	-	ELM99301531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301532	-	ELM99301532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301533	-	ELM99301533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301541	-	ELM99301541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301542	-	ELM99301542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301543	-	ELM99301543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301551	-	ELM99301551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301552	-	ELM99301552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301553	-	ELM99301553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301561	-	ELM99301561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301562	-	ELM99301562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301563	-	ELM99301563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301571	-	ELM99301571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301572	-	ELM99301572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301573	-	ELM99301573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301581	-	ELM99301581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301582	-	ELM99301582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301583	-	ELM99301583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301591	-	ELM99301591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301592	-	ELM99301592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301593	-	ELM99301593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99301601	-	ELM99301601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99301602	-	ELM99301602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99301603	-	ELM99301603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99302181	-	ELM99302181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302182	-	ELM99302182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302183	-	ELM99302183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302191	-	ELM99302191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302192	-	ELM99302192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302193	-	ELM99302193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302201	-	ELM99302201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302202	-	ELM99302202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302203	-	ELM99302203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302211	-	ELM99302211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302212	-	ELM99302212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99302213	-	ELM99302213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302221	-	ELM99302221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302222	-	ELM99302222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302223	-	ELM99302223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302231	-	ELM99302231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302232	-	ELM99302232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302233	-	ELM99302233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302241	-	ELM99302241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302242	-	ELM99302242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302243	-	ELM99302243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302251	-	ELM99302251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302252	-	ELM99302252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302253	-	ELM99302253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302261	-	ELM99302261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302262	-	ELM99302262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302263	-	ELM99302263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302271	-	ELM99302271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302272	-	ELM99302272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302273	-	ELM99302273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302281	-	ELM99302281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302282	-	ELM99302282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302283	-	ELM99302283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302291	-	ELM99302291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302292	-	ELM99302292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302293	-	ELM99302293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302301	-	ELM99302301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302302	-	ELM99302302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302303	-	ELM99302303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302311	-	ELM99302311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302312	-	ELM99302312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302313	-	ELM99302313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302321	-	ELM99302321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302322	-	ELM99302322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302323	-	ELM99302323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302331	-	ELM99302331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302332	-	ELM99302332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302333	-	ELM99302333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302341	-	ELM99302341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302342	-	ELM99302342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302343	-	ELM99302343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302351	-	ELM99302351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302352	-	ELM99302352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302353	-	ELM99302353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302361	-	ELM99302361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302362	-	ELM99302362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302363	-	ELM99302363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302371	-	ELM99302371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302372	-	ELM99302372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302373	-	ELM99302373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302381	-	ELM99302381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302382	-	ELM99302382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302383	-	ELM99302383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302391	-	ELM99302391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302392	-	ELM99302392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302393	-	ELM99302393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302401	-	ELM99302401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302402	-	ELM99302402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302403	-	ELM99302403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302411	-	ELM99302411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302412	-	ELM99302412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302413	-	ELM99302413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302421	-	ELM99302421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302422	-	ELM99302422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302423	-	ELM99302423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302431	-	ELM99302431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302432	-	ELM99302432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302433	-	ELM99302433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302441	-	ELM99302441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302442	-	ELM99302442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302443	-	ELM99302443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99302451	-	ELM99302451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302452	-	ELM99302452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302453	-	ELM99302453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302461	-	ELM99302461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302462	-	ELM99302462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302463	-	ELM99302463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302471	-	ELM99302471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302472	-	ELM99302472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302473	-	ELM99302473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302481	-	ELM99302481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302482	-	ELM99302482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302483	-	ELM99302483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302491	-	ELM99302491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302492	-	ELM99302492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302493	-	ELM99302493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302501	-	ELM99302501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302502	-	ELM99302502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302503	-	ELM99302503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302511	-	ELM99302511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302512	-	ELM99302512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302513	-	ELM99302513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302521	-	ELM99302521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302522	-	ELM99302522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302523	-	ELM99302523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302531	-	ELM99302531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302532	-	ELM99302532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302533	-	ELM99302533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302541	-	ELM99302541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302542	-	ELM99302542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302543	-	ELM99302543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302551	-	ELM99302551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302552	-	ELM99302552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302553	-	ELM99302553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302561	-	ELM99302561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302562	-	ELM99302562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302563	-	ELM99302563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302571	-	ELM99302571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302572	-	ELM99302572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302573	-	ELM99302573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302581	-	ELM99302581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302582	-	ELM99302582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302583	-	ELM99302583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302591	-	ELM99302591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302592	-	ELM99302592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302593	-	ELM99302593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99302601	-	ELM99302601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99302602	-	ELM99302602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99302603	-	ELM99302603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303181	-	ELM99303181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303182	-	ELM99303182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303183	-	ELM99303183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303191	-	ELM99303191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303192	-	ELM99303192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303193	-	ELM99303193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303201	-	ELM99303201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303202	-	ELM99303202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303203	-	ELM99303203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303211	-	ELM99303211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303212	-	ELM99303212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303213	-	ELM99303213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303221	-	ELM99303221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303222	-	ELM99303222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303223	-	ELM99303223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303231	-	ELM99303231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303232	-	ELM99303232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303233	-	ELM99303233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303241	-	ELM99303241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303242	-	ELM99303242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303243	-	ELM99303243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303251	-	ELM99303251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99303252	-	ELM99303252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303253	-	ELM99303253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303261	-	ELM99303261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303262	-	ELM99303262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303263	-	ELM99303263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303271	-	ELM99303271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303272	-	ELM99303272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303273	-	ELM99303273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303281	-	ELM99303281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303282	-	ELM99303282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303283	-	ELM99303283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303291	-	ELM99303291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303292	-	ELM99303292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303293	-	ELM99303293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303301	-	ELM99303301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303302	-	ELM99303302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303303	-	ELM99303303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303311	-	ELM99303311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303312	-	ELM99303312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303313	-	ELM99303313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303321	-	ELM99303321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303322	-	ELM99303322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303323	-	ELM99303323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303331	-	ELM99303331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303332	-	ELM99303332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303333	-	ELM99303333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303341	-	ELM99303341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303342	-	ELM99303342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303343	-	ELM99303343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303351	-	ELM99303351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303352	-	ELM99303352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303353	-	ELM99303353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303361	-	ELM99303361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303362	-	ELM99303362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303363	-	ELM99303363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303371	-	ELM99303371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303372	-	ELM99303372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303373	-	ELM99303373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303381	-	ELM99303381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303382	-	ELM99303382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303383	-	ELM99303383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303391	-	ELM99303391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303392	-	ELM99303392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303393	-	ELM99303393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303401	-	ELM99303401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303402	-	ELM99303402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303403	-	ELM99303403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303411	-	ELM99303411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303412	-	ELM99303412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303413	-	ELM99303413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303421	-	ELM99303421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303422	-	ELM99303422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303423	-	ELM99303423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303431	-	ELM99303431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303432	-	ELM99303432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303433	-	ELM99303433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303441	-	ELM99303441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303442	-	ELM99303442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303443	-	ELM99303443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303451	-	ELM99303451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303452	-	ELM99303452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303453	-	ELM99303453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303461	-	ELM99303461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303462	-	ELM99303462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303463	-	ELM99303463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303471	-	ELM99303471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303472	-	ELM99303472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303473	-	ELM99303473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303481	-	ELM99303481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303482	-	ELM99303482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99303483	-	ELM99303483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303491	-	ELM99303491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303492	-	ELM99303492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303493	-	ELM99303493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303501	-	ELM99303501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303502	-	ELM99303502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303503	-	ELM99303503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303511	-	ELM99303511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303512	-	ELM99303512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303513	-	ELM99303513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303521	-	ELM99303521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303522	-	ELM99303522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303523	-	ELM99303523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303531	-	ELM99303531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303532	-	ELM99303532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303533	-	ELM99303533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303541	-	ELM99303541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303542	-	ELM99303542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303543	-	ELM99303543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303551	-	ELM99303551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303552	-	ELM99303552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303553	-	ELM99303553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303561	-	ELM99303561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303562	-	ELM99303562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303563	-	ELM99303563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303571	-	ELM99303571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303572	-	ELM99303572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303573	-	ELM99303573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303581	-	ELM99303581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303582	-	ELM99303582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303583	-	ELM99303583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303591	-	ELM99303591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303592	-	ELM99303592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303593	-	ELM99303593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99303601	-	ELM99303601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99303602	-	ELM99303602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99303603	-	ELM99303603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99311181	-	ELM99311181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311182	-	ELM99311182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311183	-	ELM99311183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311191	-	ELM99311191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311192	-	ELM99311192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311193	-	ELM99311193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311201	-	ELM99311201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311202	-	ELM99311202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311203	-	ELM99311203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311211	-	ELM99311211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311212	-	ELM99311212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311213	-	ELM99311213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311221	-	ELM99311221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311222	-	ELM99311222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311223	-	ELM99311223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311231	-	ELM99311231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311232	-	ELM99311232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311233	-	ELM99311233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311241	-	ELM99311241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311242	-	ELM99311242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311243	-	ELM99311243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311251	-	ELM99311251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311252	-	ELM99311252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311253	-	ELM99311253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311261	-	ELM99311261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311262	-	ELM99311262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311263	-	ELM99311263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311271	-	ELM99311271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311272	-	ELM99311272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311273	-	ELM99311273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311281	-	ELM99311281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311282	-	ELM99311282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311283	-	ELM99311283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99311291	-	ELM99311291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311292	-	ELM99311292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311293	-	ELM99311293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311301	-	ELM99311301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311302	-	ELM99311302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311303	-	ELM99311303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311311	-	ELM99311311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311312	-	ELM99311312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311313	-	ELM99311313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311321	-	ELM99311321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311322	-	ELM99311322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311323	-	ELM99311323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311331	-	ELM99311331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311332	-	ELM99311332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311333	-	ELM99311333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311341	-	ELM99311341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311342	-	ELM99311342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311343	-	ELM99311343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311351	-	ELM99311351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311352	-	ELM99311352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311353	-	ELM99311353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311361	-	ELM99311361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311362	-	ELM99311362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311363	-	ELM99311363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311371	-	ELM99311371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311372	-	ELM99311372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311373	-	ELM99311373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311381	-	ELM99311381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311382	-	ELM99311382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311383	-	ELM99311383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311391	-	ELM99311391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311392	-	ELM99311392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311393	-	ELM99311393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311401	-	ELM99311401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311402	-	ELM99311402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311403	-	ELM99311403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311411	-	ELM99311411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311412	-	ELM99311412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311413	-	ELM99311413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311421	-	ELM99311421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311422	-	ELM99311422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311423	-	ELM99311423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311431	-	ELM99311431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311432	-	ELM99311432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311433	-	ELM99311433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311441	-	ELM99311441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311442	-	ELM99311442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311443	-	ELM99311443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311451	-	ELM99311451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311452	-	ELM99311452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311453	-	ELM99311453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311461	-	ELM99311461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311462	-	ELM99311462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311463	-	ELM99311463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311471	-	ELM99311471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311472	-	ELM99311472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311473	-	ELM99311473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311481	-	ELM99311481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311482	-	ELM99311482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311483	-	ELM99311483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311491	-	ELM99311491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311492	-	ELM99311492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311493	-	ELM99311493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311501	-	ELM99311501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311502	-	ELM99311502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311503	-	ELM99311503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311511	-	ELM99311511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311512	-	ELM99311512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311513	-	ELM99311513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311521	-	ELM99311521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99311522	-	ELM99311522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311523	-	ELM99311523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311531	-	ELM99311531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311532	-	ELM99311532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311533	-	ELM99311533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311541	-	ELM99311541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311542	-	ELM99311542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311543	-	ELM99311543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311551	-	ELM99311551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311552	-	ELM99311552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311553	-	ELM99311553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311561	-	ELM99311561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311562	-	ELM99311562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311563	-	ELM99311563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311571	-	ELM99311571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311572	-	ELM99311572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311573	-	ELM99311573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311581	-	ELM99311581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311582	-	ELM99311582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311583	-	ELM99311583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311591	-	ELM99311591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311592	-	ELM99311592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311593	-	ELM99311593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99311601	-	ELM99311601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99311602	-	ELM99311602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99311603	-	ELM99311603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99312181	-	ELM99312181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312182	-	ELM99312182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312183	-	ELM99312183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312191	-	ELM99312191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312192	-	ELM99312192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312193	-	ELM99312193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312201	-	ELM99312201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312202	-	ELM99312202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312203	-	ELM99312203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312211	-	ELM99312211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312212	-	ELM99312212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312213	-	ELM99312213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312221	-	ELM99312221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312222	-	ELM99312222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312223	-	ELM99312223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312231	-	ELM99312231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312232	-	ELM99312232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312233	-	ELM99312233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312241	-	ELM99312241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312242	-	ELM99312242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312243	-	ELM99312243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312251	-	ELM99312251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312252	-	ELM99312252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312253	-	ELM99312253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312261	-	ELM99312261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312262	-	ELM99312262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312263	-	ELM99312263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312271	-	ELM99312271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312272	-	ELM99312272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312273	-	ELM99312273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312281	-	ELM99312281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312282	-	ELM99312282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312283	-	ELM99312283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312291	-	ELM99312291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312292	-	ELM99312292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312293	-	ELM99312293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312301	-	ELM99312301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312302	-	ELM99312302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312303	-	ELM99312303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312311	-	ELM99312311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312312	-	ELM99312312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312313	-	ELM99312313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312321	-	ELM99312321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312322	-	ELM99312322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99312323	-	ELM99312323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312331	-	ELM99312331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312332	-	ELM99312332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312333	-	ELM99312333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312341	-	ELM99312341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312342	-	ELM99312342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312343	-	ELM99312343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312351	-	ELM99312351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312352	-	ELM99312352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312353	-	ELM99312353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312361	-	ELM99312361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312362	-	ELM99312362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312363	-	ELM99312363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312371	-	ELM99312371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312372	-	ELM99312372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312373	-	ELM99312373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312381	-	ELM99312381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312382	-	ELM99312382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312383	-	ELM99312383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312391	-	ELM99312391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312392	-	ELM99312392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312393	-	ELM99312393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312401	-	ELM99312401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312402	-	ELM99312402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312403	-	ELM99312403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312411	-	ELM99312411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312412	-	ELM99312412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312413	-	ELM99312413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312421	-	ELM99312421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312422	-	ELM99312422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312423	-	ELM99312423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312431	-	ELM99312431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312432	-	ELM99312432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312433	-	ELM99312433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312441	-	ELM99312441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312442	-	ELM99312442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312443	-	ELM99312443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312451	-	ELM99312451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312452	-	ELM99312452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312453	-	ELM99312453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312461	-	ELM99312461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312462	-	ELM99312462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312463	-	ELM99312463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312471	-	ELM99312471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312472	-	ELM99312472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312473	-	ELM99312473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312481	-	ELM99312481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312482	-	ELM99312482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312483	-	ELM99312483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312491	-	ELM99312491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312492	-	ELM99312492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312493	-	ELM99312493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312501	-	ELM99312501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312502	-	ELM99312502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312503	-	ELM99312503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312511	-	ELM99312511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312512	-	ELM99312512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312513	-	ELM99312513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312521	-	ELM99312521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312522	-	ELM99312522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312523	-	ELM99312523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312531	-	ELM99312531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312532	-	ELM99312532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312533	-	ELM99312533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312541	-	ELM99312541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312542	-	ELM99312542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312543	-	ELM99312543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312551	-	ELM99312551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312552	-	ELM99312552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312553	-	ELM99312553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99312561	-	ELM99312561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312562	-	ELM99312562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312563	-	ELM99312563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312571	-	ELM99312571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312572	-	ELM99312572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312573	-	ELM99312573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312581	-	ELM99312581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312582	-	ELM99312582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312583	-	ELM99312583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312591	-	ELM99312591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312592	-	ELM99312592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312593	-	ELM99312593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99312601	-	ELM99312601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99312602	-	ELM99312602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99312603	-	ELM99312603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313181	-	ELM99313181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313182	-	ELM99313182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313183	-	ELM99313183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313191	-	ELM99313191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313192	-	ELM99313192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313193	-	ELM99313193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313201	-	ELM99313201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313202	-	ELM99313202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313203	-	ELM99313203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313211	-	ELM99313211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313212	-	ELM99313212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313213	-	ELM99313213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313221	-	ELM99313221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313222	-	ELM99313222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313223	-	ELM99313223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313231	-	ELM99313231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313232	-	ELM99313232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313233	-	ELM99313233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313241	-	ELM99313241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313242	-	ELM99313242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313243	-	ELM99313243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313251	-	ELM99313251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313252	-	ELM99313252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313253	-	ELM99313253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313261	-	ELM99313261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313262	-	ELM99313262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313263	-	ELM99313263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313271	-	ELM99313271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313272	-	ELM99313272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313273	-	ELM99313273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313281	-	ELM99313281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313282	-	ELM99313282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313283	-	ELM99313283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313291	-	ELM99313291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313292	-	ELM99313292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313293	-	ELM99313293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313301	-	ELM99313301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313302	-	ELM99313302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313303	-	ELM99313303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313311	-	ELM99313311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313312	-	ELM99313312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313313	-	ELM99313313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313321	-	ELM99313321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313322	-	ELM99313322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313323	-	ELM99313323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313331	-	ELM99313331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313332	-	ELM99313332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313333	-	ELM99313333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313341	-	ELM99313341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313342	-	ELM99313342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313343	-	ELM99313343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313351	-	ELM99313351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313352	-	ELM99313352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313353	-	ELM99313353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313361	-	ELM99313361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99313362	-	ELM99313362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313363	-	ELM99313363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313371	-	ELM99313371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313372	-	ELM99313372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313373	-	ELM99313373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313381	-	ELM99313381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313382	-	ELM99313382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313383	-	ELM99313383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313391	-	ELM99313391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313392	-	ELM99313392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313393	-	ELM99313393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313401	-	ELM99313401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313402	-	ELM99313402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313403	-	ELM99313403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313411	-	ELM99313411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313412	-	ELM99313412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313413	-	ELM99313413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313421	-	ELM99313421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313422	-	ELM99313422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313423	-	ELM99313423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313431	-	ELM99313431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313432	-	ELM99313432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313433	-	ELM99313433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313441	-	ELM99313441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313442	-	ELM99313442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313443	-	ELM99313443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313451	-	ELM99313451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313452	-	ELM99313452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313453	-	ELM99313453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313461	-	ELM99313461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313462	-	ELM99313462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313463	-	ELM99313463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313471	-	ELM99313471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313472	-	ELM99313472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313473	-	ELM99313473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313481	-	ELM99313481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313482	-	ELM99313482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313483	-	ELM99313483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313491	-	ELM99313491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313492	-	ELM99313492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313493	-	ELM99313493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313501	-	ELM99313501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313502	-	ELM99313502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313503	-	ELM99313503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313511	-	ELM99313511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313512	-	ELM99313512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313513	-	ELM99313513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313521	-	ELM99313521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313522	-	ELM99313522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313523	-	ELM99313523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313531	-	ELM99313531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313532	-	ELM99313532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313533	-	ELM99313533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313541	-	ELM99313541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313542	-	ELM99313542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313543	-	ELM99313543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313551	-	ELM99313551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313552	-	ELM99313552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313553	-	ELM99313553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313561	-	ELM99313561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313562	-	ELM99313562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313563	-	ELM99313563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313571	-	ELM99313571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313572	-	ELM99313572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313573	-	ELM99313573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313581	-	ELM99313581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313582	-	ELM99313582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313583	-	ELM99313583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313591	-	ELM99313591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313592	-	ELM99313592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99313593	-	ELM99313593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99313601	-	ELM99313601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99313602	-	ELM99313602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99313603	-	ELM99313603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99321181	-	ELM99321181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321182	-	ELM99321182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321183	-	ELM99321183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321191	-	ELM99321191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321192	-	ELM99321192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321193	-	ELM99321193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321201	-	ELM99321201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321202	-	ELM99321202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321203	-	ELM99321203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321211	-	ELM99321211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321212	-	ELM99321212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321213	-	ELM99321213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321221	-	ELM99321221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321222	-	ELM99321222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321223	-	ELM99321223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321231	-	ELM99321231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321232	-	ELM99321232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321233	-	ELM99321233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321241	-	ELM99321241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321242	-	ELM99321242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321243	-	ELM99321243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321251	-	ELM99321251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321252	-	ELM99321252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321253	-	ELM99321253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321261	-	ELM99321261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321262	-	ELM99321262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321263	-	ELM99321263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321271	-	ELM99321271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321272	-	ELM99321272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321273	-	ELM99321273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321281	-	ELM99321281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321282	-	ELM99321282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321283	-	ELM99321283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321291	-	ELM99321291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321292	-	ELM99321292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321293	-	ELM99321293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321301	-	ELM99321301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321302	-	ELM99321302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321303	-	ELM99321303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321311	-	ELM99321311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321312	-	ELM99321312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321313	-	ELM99321313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321321	-	ELM99321321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321322	-	ELM99321322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321323	-	ELM99321323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321331	-	ELM99321331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321332	-	ELM99321332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321333	-	ELM99321333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321341	-	ELM99321341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321342	-	ELM99321342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321343	-	ELM99321343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321351	-	ELM99321351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321352	-	ELM99321352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321353	-	ELM99321353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321361	-	ELM99321361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321362	-	ELM99321362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321363	-	ELM99321363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321371	-	ELM99321371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321372	-	ELM99321372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321373	-	ELM99321373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321381	-	ELM99321381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321382	-	ELM99321382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321383	-	ELM99321383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321391	-	ELM99321391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321392	-	ELM99321392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321393	-	ELM99321393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99321401	-	ELM99321401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321402	-	ELM99321402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321403	-	ELM99321403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321411	-	ELM99321411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321412	-	ELM99321412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321413	-	ELM99321413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321421	-	ELM99321421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321422	-	ELM99321422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321423	-	ELM99321423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321431	-	ELM99321431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321432	-	ELM99321432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321433	-	ELM99321433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321441	-	ELM99321441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321442	-	ELM99321442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321443	-	ELM99321443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321451	-	ELM99321451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321452	-	ELM99321452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321453	-	ELM99321453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321461	-	ELM99321461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321462	-	ELM99321462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321463	-	ELM99321463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321471	-	ELM99321471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321472	-	ELM99321472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321473	-	ELM99321473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321481	-	ELM99321481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321482	-	ELM99321482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321483	-	ELM99321483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321491	-	ELM99321491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321492	-	ELM99321492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321493	-	ELM99321493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321501	-	ELM99321501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321502	-	ELM99321502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321503	-	ELM99321503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321511	-	ELM99321511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321512	-	ELM99321512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321513	-	ELM99321513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321521	-	ELM99321521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321522	-	ELM99321522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321523	-	ELM99321523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321531	-	ELM99321531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321532	-	ELM99321532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321533	-	ELM99321533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321541	-	ELM99321541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321542	-	ELM99321542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321543	-	ELM99321543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321551	-	ELM99321551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321552	-	ELM99321552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321553	-	ELM99321553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321561	-	ELM99321561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321562	-	ELM99321562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321563	-	ELM99321563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321571	-	ELM99321571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321572	-	ELM99321572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321573	-	ELM99321573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321581	-	ELM99321581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321582	-	ELM99321582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321583	-	ELM99321583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321591	-	ELM99321591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321592	-	ELM99321592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321593	-	ELM99321593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99321601	-	ELM99321601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99321602	-	ELM99321602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99321603	-	ELM99321603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99322181	-	ELM99322181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322182	-	ELM99322182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322183	-	ELM99322183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322191	-	ELM99322191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322192	-	ELM99322192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322193	-	ELM99322193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322201	-	ELM99322201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99322202	-	ELM99322202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322203	-	ELM99322203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322211	-	ELM99322211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322212	-	ELM99322212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322213	-	ELM99322213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322221	-	ELM99322221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322222	-	ELM99322222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322223	-	ELM99322223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322231	-	ELM99322231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322232	-	ELM99322232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322233	-	ELM99322233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322241	-	ELM99322241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322242	-	ELM99322242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322243	-	ELM99322243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322251	-	ELM99322251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322252	-	ELM99322252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322253	-	ELM99322253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322261	-	ELM99322261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322262	-	ELM99322262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322263	-	ELM99322263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322271	-	ELM99322271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322272	-	ELM99322272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322273	-	ELM99322273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322281	-	ELM99322281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322282	-	ELM99322282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322283	-	ELM99322283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322291	-	ELM99322291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322292	-	ELM99322292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322293	-	ELM99322293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322301	-	ELM99322301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322302	-	ELM99322302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322303	-	ELM99322303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322311	-	ELM99322311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322312	-	ELM99322312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322313	-	ELM99322313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322321	-	ELM99322321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322322	-	ELM99322322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322323	-	ELM99322323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322331	-	ELM99322331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322332	-	ELM99322332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322333	-	ELM99322333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322341	-	ELM99322341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322342	-	ELM99322342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322343	-	ELM99322343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322351	-	ELM99322351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322352	-	ELM99322352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322353	-	ELM99322353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322361	-	ELM99322361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322362	-	ELM99322362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322363	-	ELM99322363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322371	-	ELM99322371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322372	-	ELM99322372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322373	-	ELM99322373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322381	-	ELM99322381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322382	-	ELM99322382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322383	-	ELM99322383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322391	-	ELM99322391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322392	-	ELM99322392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322393	-	ELM99322393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322401	-	ELM99322401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322402	-	ELM99322402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322403	-	ELM99322403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322411	-	ELM99322411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322412	-	ELM99322412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322413	-	ELM99322413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322421	-	ELM99322421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322422	-	ELM99322422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322423	-	ELM99322423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322431	-	ELM99322431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322432	-	ELM99322432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99322433	-	ELM99322433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322441	-	ELM99322441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322442	-	ELM99322442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322443	-	ELM99322443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322451	-	ELM99322451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322452	-	ELM99322452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322453	-	ELM99322453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322461	-	ELM99322461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322462	-	ELM99322462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322463	-	ELM99322463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322471	-	ELM99322471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322472	-	ELM99322472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322473	-	ELM99322473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322481	-	ELM99322481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322482	-	ELM99322482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322483	-	ELM99322483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322491	-	ELM99322491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322492	-	ELM99322492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322493	-	ELM99322493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322501	-	ELM99322501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322502	-	ELM99322502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322503	-	ELM99322503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322511	-	ELM99322511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322512	-	ELM99322512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322513	-	ELM99322513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322521	-	ELM99322521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322522	-	ELM99322522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322523	-	ELM99322523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322531	-	ELM99322531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322532	-	ELM99322532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322533	-	ELM99322533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322541	-	ELM99322541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322542	-	ELM99322542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322543	-	ELM99322543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322551	-	ELM99322551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322552	-	ELM99322552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322553	-	ELM99322553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322561	-	ELM99322561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322562	-	ELM99322562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322563	-	ELM99322563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322571	-	ELM99322571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322572	-	ELM99322572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322573	-	ELM99322573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322581	-	ELM99322581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322582	-	ELM99322582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322583	-	ELM99322583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322591	-	ELM99322591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322592	-	ELM99322592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322593	-	ELM99322593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99322601	-	ELM99322601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99322602	-	ELM99322602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99322603	-	ELM99322603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323181	-	ELM99323181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323182	-	ELM99323182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323183	-	ELM99323183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323191	-	ELM99323191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323192	-	ELM99323192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323193	-	ELM99323193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323201	-	ELM99323201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323202	-	ELM99323202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323203	-	ELM99323203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323211	-	ELM99323211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323212	-	ELM99323212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323213	-	ELM99323213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323221	-	ELM99323221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323222	-	ELM99323222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323223	-	ELM99323223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323231	-	ELM99323231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323232	-	ELM99323232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323233	-	ELM99323233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99323241	-	ELM99323241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323242	-	ELM99323242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323243	-	ELM99323243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323251	-	ELM99323251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323252	-	ELM99323252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323253	-	ELM99323253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323261	-	ELM99323261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323262	-	ELM99323262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323263	-	ELM99323263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323271	-	ELM99323271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323272	-	ELM99323272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323273	-	ELM99323273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323281	-	ELM99323281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323282	-	ELM99323282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323283	-	ELM99323283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323291	-	ELM99323291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323292	-	ELM99323292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323293	-	ELM99323293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323301	-	ELM99323301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323302	-	ELM99323302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323303	-	ELM99323303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323311	-	ELM99323311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323312	-	ELM99323312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323313	-	ELM99323313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323321	-	ELM99323321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323322	-	ELM99323322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323323	-	ELM99323323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323331	-	ELM99323331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323332	-	ELM99323332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323333	-	ELM99323333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323341	-	ELM99323341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323342	-	ELM99323342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323343	-	ELM99323343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323351	-	ELM99323351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323352	-	ELM99323352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323353	-	ELM99323353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323361	-	ELM99323361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323362	-	ELM99323362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323363	-	ELM99323363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323371	-	ELM99323371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323372	-	ELM99323372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323373	-	ELM99323373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323381	-	ELM99323381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323382	-	ELM99323382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323383	-	ELM99323383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323391	-	ELM99323391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323392	-	ELM99323392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323393	-	ELM99323393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323401	-	ELM99323401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323402	-	ELM99323402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323403	-	ELM99323403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323411	-	ELM99323411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323412	-	ELM99323412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323413	-	ELM99323413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323421	-	ELM99323421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323422	-	ELM99323422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323423	-	ELM99323423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323431	-	ELM99323431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323432	-	ELM99323432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323433	-	ELM99323433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323441	-	ELM99323441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323442	-	ELM99323442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323443	-	ELM99323443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323451	-	ELM99323451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323452	-	ELM99323452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323453	-	ELM99323453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323461	-	ELM99323461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323462	-	ELM99323462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323463	-	ELM99323463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323471	-	ELM99323471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99323472	-	ELM99323472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323473	-	ELM99323473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323481	-	ELM99323481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323482	-	ELM99323482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323483	-	ELM99323483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323491	-	ELM99323491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323492	-	ELM99323492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323493	-	ELM99323493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323501	-	ELM99323501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323502	-	ELM99323502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323503	-	ELM99323503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323511	-	ELM99323511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323512	-	ELM99323512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323513	-	ELM99323513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323521	-	ELM99323521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323522	-	ELM99323522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323523	-	ELM99323523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323531	-	ELM99323531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323532	-	ELM99323532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323533	-	ELM99323533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323541	-	ELM99323541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323542	-	ELM99323542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323543	-	ELM99323543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323551	-	ELM99323551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323552	-	ELM99323552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323553	-	ELM99323553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323561	-	ELM99323561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323562	-	ELM99323562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323563	-	ELM99323563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323571	-	ELM99323571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323572	-	ELM99323572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323573	-	ELM99323573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323581	-	ELM99323581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323582	-	ELM99323582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323583	-	ELM99323583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323591	-	ELM99323591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323592	-	ELM99323592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323593	-	ELM99323593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99323601	-	ELM99323601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99323602	-	ELM99323602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99323603	-	ELM99323603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99331181	-	ELM99331181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331182	-	ELM99331182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331183	-	ELM99331183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331191	-	ELM99331191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331192	-	ELM99331192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331193	-	ELM99331193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331201	-	ELM99331201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331202	-	ELM99331202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331203	-	ELM99331203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331211	-	ELM99331211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331212	-	ELM99331212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331213	-	ELM99331213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331221	-	ELM99331221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331222	-	ELM99331222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331223	-	ELM99331223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331231	-	ELM99331231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331232	-	ELM99331232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331233	-	ELM99331233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331241	-	ELM99331241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331242	-	ELM99331242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331243	-	ELM99331243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331251	-	ELM99331251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331252	-	ELM99331252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331253	-	ELM99331253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331261	-	ELM99331261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331262	-	ELM99331262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331263	-	ELM99331263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331271	-	ELM99331271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331272	-	ELM99331272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99331273	-	ELM99331273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331281	-	ELM99331281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331282	-	ELM99331282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331283	-	ELM99331283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331291	-	ELM99331291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331292	-	ELM99331292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331293	-	ELM99331293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331301	-	ELM99331301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331302	-	ELM99331302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331303	-	ELM99331303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331311	-	ELM99331311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331312	-	ELM99331312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331313	-	ELM99331313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331321	-	ELM99331321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331322	-	ELM99331322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331323	-	ELM99331323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331331	-	ELM99331331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331332	-	ELM99331332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331333	-	ELM99331333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331341	-	ELM99331341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331342	-	ELM99331342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331343	-	ELM99331343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331351	-	ELM99331351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331352	-	ELM99331352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331353	-	ELM99331353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331361	-	ELM99331361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331362	-	ELM99331362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331363	-	ELM99331363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331371	-	ELM99331371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331372	-	ELM99331372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331373	-	ELM99331373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331381	-	ELM99331381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331382	-	ELM99331382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331383	-	ELM99331383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331391	-	ELM99331391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331392	-	ELM99331392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331393	-	ELM99331393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331401	-	ELM99331401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331402	-	ELM99331402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331403	-	ELM99331403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331411	-	ELM99331411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331412	-	ELM99331412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331413	-	ELM99331413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331421	-	ELM99331421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331422	-	ELM99331422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331423	-	ELM99331423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331431	-	ELM99331431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331432	-	ELM99331432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331433	-	ELM99331433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331441	-	ELM99331441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331442	-	ELM99331442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331443	-	ELM99331443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331451	-	ELM99331451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331452	-	ELM99331452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331453	-	ELM99331453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331461	-	ELM99331461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331462	-	ELM99331462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331463	-	ELM99331463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331471	-	ELM99331471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331472	-	ELM99331472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331473	-	ELM99331473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331481	-	ELM99331481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331482	-	ELM99331482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331483	-	ELM99331483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331491	-	ELM99331491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331492	-	ELM99331492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331493	-	ELM99331493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331501	-	ELM99331501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331502	-	ELM99331502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331503	-	ELM99331503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99331511	-	ELM99331511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331512	-	ELM99331512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331513	-	ELM99331513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331521	-	ELM99331521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331522	-	ELM99331522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331523	-	ELM99331523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331531	-	ELM99331531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331532	-	ELM99331532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331533	-	ELM99331533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331541	-	ELM99331541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331542	-	ELM99331542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331543	-	ELM99331543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331551	-	ELM99331551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331552	-	ELM99331552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331553	-	ELM99331553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331561	-	ELM99331561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331562	-	ELM99331562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331563	-	ELM99331563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331571	-	ELM99331571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331572	-	ELM99331572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331573	-	ELM99331573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331581	-	ELM99331581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331582	-	ELM99331582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331583	-	ELM99331583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331591	-	ELM99331591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331592	-	ELM99331592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331593	-	ELM99331593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99331601	-	ELM99331601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99331602	-	ELM99331602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99331603	-	ELM99331603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99332181	-	ELM99332181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332182	-	ELM99332182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332183	-	ELM99332183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332191	-	ELM99332191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332192	-	ELM99332192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332193	-	ELM99332193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332201	-	ELM99332201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332202	-	ELM99332202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332203	-	ELM99332203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332211	-	ELM99332211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332212	-	ELM99332212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332213	-	ELM99332213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332221	-	ELM99332221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332222	-	ELM99332222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332223	-	ELM99332223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332231	-	ELM99332231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332232	-	ELM99332232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332233	-	ELM99332233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332241	-	ELM99332241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332242	-	ELM99332242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332243	-	ELM99332243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332251	-	ELM99332251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332252	-	ELM99332252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332253	-	ELM99332253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332261	-	ELM99332261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332262	-	ELM99332262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332263	-	ELM99332263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332271	-	ELM99332271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332272	-	ELM99332272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332273	-	ELM99332273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332281	-	ELM99332281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332282	-	ELM99332282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332283	-	ELM99332283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332291	-	ELM99332291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332292	-	ELM99332292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332293	-	ELM99332293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332301	-	ELM99332301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332302	-	ELM99332302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332303	-	ELM99332303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332311	-	ELM99332311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99332312	-	ELM99332312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332313	-	ELM99332313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332321	-	ELM99332321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332322	-	ELM99332322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332323	-	ELM99332323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332331	-	ELM99332331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332332	-	ELM99332332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332333	-	ELM99332333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332341	-	ELM99332341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332342	-	ELM99332342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332343	-	ELM99332343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332351	-	ELM99332351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332352	-	ELM99332352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332353	-	ELM99332353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332361	-	ELM99332361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332362	-	ELM99332362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332363	-	ELM99332363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332371	-	ELM99332371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332372	-	ELM99332372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332373	-	ELM99332373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332381	-	ELM99332381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332382	-	ELM99332382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332383	-	ELM99332383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332391	-	ELM99332391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332392	-	ELM99332392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332393	-	ELM99332393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332401	-	ELM99332401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332402	-	ELM99332402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332403	-	ELM99332403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332411	-	ELM99332411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332412	-	ELM99332412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332413	-	ELM99332413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332421	-	ELM99332421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332422	-	ELM99332422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332423	-	ELM99332423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332431	-	ELM99332431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332432	-	ELM99332432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332433	-	ELM99332433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332441	-	ELM99332441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332442	-	ELM99332442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332443	-	ELM99332443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332451	-	ELM99332451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332452	-	ELM99332452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332453	-	ELM99332453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332461	-	ELM99332461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332462	-	ELM99332462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332463	-	ELM99332463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332471	-	ELM99332471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332472	-	ELM99332472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332473	-	ELM99332473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332481	-	ELM99332481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332482	-	ELM99332482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332483	-	ELM99332483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332491	-	ELM99332491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332492	-	ELM99332492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332493	-	ELM99332493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332501	-	ELM99332501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332502	-	ELM99332502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332503	-	ELM99332503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332511	-	ELM99332511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332512	-	ELM99332512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332513	-	ELM99332513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332521	-	ELM99332521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332522	-	ELM99332522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332523	-	ELM99332523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332531	-	ELM99332531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332532	-	ELM99332532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332533	-	ELM99332533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332541	-	ELM99332541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332542	-	ELM99332542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99332543	-	ELM99332543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332551	-	ELM99332551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332552	-	ELM99332552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332553	-	ELM99332553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332561	-	ELM99332561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332562	-	ELM99332562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332563	-	ELM99332563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332571	-	ELM99332571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332572	-	ELM99332572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332573	-	ELM99332573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332581	-	ELM99332581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332582	-	ELM99332582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332583	-	ELM99332583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332591	-	ELM99332591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332592	-	ELM99332592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332593	-	ELM99332593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99332601	-	ELM99332601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99332602	-	ELM99332602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99332603	-	ELM99332603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333181	-	ELM99333181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333182	-	ELM99333182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333183	-	ELM99333183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333191	-	ELM99333191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333192	-	ELM99333192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333193	-	ELM99333193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333201	-	ELM99333201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333202	-	ELM99333202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333203	-	ELM99333203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333211	-	ELM99333211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333212	-	ELM99333212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333213	-	ELM99333213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333221	-	ELM99333221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333222	-	ELM99333222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333223	-	ELM99333223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333231	-	ELM99333231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333232	-	ELM99333232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333233	-	ELM99333233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333241	-	ELM99333241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333242	-	ELM99333242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333243	-	ELM99333243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333251	-	ELM99333251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333252	-	ELM99333252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333253	-	ELM99333253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333261	-	ELM99333261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333262	-	ELM99333262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333263	-	ELM99333263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333271	-	ELM99333271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333272	-	ELM99333272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333273	-	ELM99333273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333281	-	ELM99333281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333282	-	ELM99333282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333283	-	ELM99333283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333291	-	ELM99333291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333292	-	ELM99333292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333293	-	ELM99333293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333301	-	ELM99333301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333302	-	ELM99333302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333303	-	ELM99333303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333311	-	ELM99333311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333312	-	ELM99333312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333313	-	ELM99333313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333321	-	ELM99333321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333322	-	ELM99333322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333323	-	ELM99333323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333331	-	ELM99333331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333332	-	ELM99333332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333333	-	ELM99333333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333341	-	ELM99333341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333342	-	ELM99333342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333343	-	ELM99333343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99333351	-	ELM99333351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333352	-	ELM99333352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333353	-	ELM99333353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333361	-	ELM99333361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333362	-	ELM99333362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333363	-	ELM99333363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333371	-	ELM99333371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333372	-	ELM99333372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333373	-	ELM99333373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333381	-	ELM99333381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333382	-	ELM99333382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333383	-	ELM99333383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333391	-	ELM99333391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333392	-	ELM99333392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333393	-	ELM99333393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333401	-	ELM99333401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333402	-	ELM99333402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333403	-	ELM99333403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333411	-	ELM99333411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333412	-	ELM99333412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333413	-	ELM99333413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333421	-	ELM99333421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333422	-	ELM99333422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333423	-	ELM99333423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333431	-	ELM99333431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333432	-	ELM99333432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333433	-	ELM99333433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333441	-	ELM99333441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333442	-	ELM99333442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333443	-	ELM99333443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333451	-	ELM99333451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333452	-	ELM99333452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333453	-	ELM99333453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333461	-	ELM99333461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333462	-	ELM99333462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333463	-	ELM99333463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333471	-	ELM99333471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333472	-	ELM99333472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333473	-	ELM99333473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333481	-	ELM99333481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333482	-	ELM99333482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333483	-	ELM99333483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333491	-	ELM99333491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333492	-	ELM99333492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333493	-	ELM99333493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333501	-	ELM99333501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333502	-	ELM99333502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333503	-	ELM99333503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333511	-	ELM99333511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333512	-	ELM99333512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333513	-	ELM99333513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333521	-	ELM99333521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333522	-	ELM99333522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333523	-	ELM99333523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333531	-	ELM99333531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333532	-	ELM99333532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333533	-	ELM99333533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333541	-	ELM99333541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333542	-	ELM99333542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333543	-	ELM99333543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333551	-	ELM99333551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333552	-	ELM99333552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333553	-	ELM99333553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333561	-	ELM99333561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333562	-	ELM99333562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333563	-	ELM99333563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333571	-	ELM99333571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333572	-	ELM99333572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333573	-	ELM99333573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333581	-	ELM99333581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99333582	-	ELM99333582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333583	-	ELM99333583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333591	-	ELM99333591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333592	-	ELM99333592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333593	-	ELM99333593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99333601	-	ELM99333601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99333602	-	ELM99333602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99333603	-	ELM99333603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99341181	-	ELM99341181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341182	-	ELM99341182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341183	-	ELM99341183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341191	-	ELM99341191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341192	-	ELM99341192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341193	-	ELM99341193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341201	-	ELM99341201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341202	-	ELM99341202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341203	-	ELM99341203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341211	-	ELM99341211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341212	-	ELM99341212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341213	-	ELM99341213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341221	-	ELM99341221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341222	-	ELM99341222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341223	-	ELM99341223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341231	-	ELM99341231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341232	-	ELM99341232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341233	-	ELM99341233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341241	-	ELM99341241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341242	-	ELM99341242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341243	-	ELM99341243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341251	-	ELM99341251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341252	-	ELM99341252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341253	-	ELM99341253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341261	-	ELM99341261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341262	-	ELM99341262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341263	-	ELM99341263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341271	-	ELM99341271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341272	-	ELM99341272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341273	-	ELM99341273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341281	-	ELM99341281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341282	-	ELM99341282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341283	-	ELM99341283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341291	-	ELM99341291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341292	-	ELM99341292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341293	-	ELM99341293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341301	-	ELM99341301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341302	-	ELM99341302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341303	-	ELM99341303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341311	-	ELM99341311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341312	-	ELM99341312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341313	-	ELM99341313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341321	-	ELM99341321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341322	-	ELM99341322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341323	-	ELM99341323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341331	-	ELM99341331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341332	-	ELM99341332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341333	-	ELM99341333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341341	-	ELM99341341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341342	-	ELM99341342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341343	-	ELM99341343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341351	-	ELM99341351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341352	-	ELM99341352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341353	-	ELM99341353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341361	-	ELM99341361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341362	-	ELM99341362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341363	-	ELM99341363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341371	-	ELM99341371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341372	-	ELM99341372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341373	-	ELM99341373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341381	-	ELM99341381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341382	-	ELM99341382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99341383	-	ELM99341383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341391	-	ELM99341391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341392	-	ELM99341392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341393	-	ELM99341393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341401	-	ELM99341401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341402	-	ELM99341402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341403	-	ELM99341403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341411	-	ELM99341411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341412	-	ELM99341412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341413	-	ELM99341413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341421	-	ELM99341421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341422	-	ELM99341422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341423	-	ELM99341423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341431	-	ELM99341431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341432	-	ELM99341432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341433	-	ELM99341433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341441	-	ELM99341441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341442	-	ELM99341442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341443	-	ELM99341443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341451	-	ELM99341451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341452	-	ELM99341452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341453	-	ELM99341453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341461	-	ELM99341461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341462	-	ELM99341462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341463	-	ELM99341463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341471	-	ELM99341471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341472	-	ELM99341472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341473	-	ELM99341473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341481	-	ELM99341481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341482	-	ELM99341482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341483	-	ELM99341483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341491	-	ELM99341491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341492	-	ELM99341492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341493	-	ELM99341493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341501	-	ELM99341501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341502	-	ELM99341502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341503	-	ELM99341503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341511	-	ELM99341511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341512	-	ELM99341512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341513	-	ELM99341513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341521	-	ELM99341521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341522	-	ELM99341522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341523	-	ELM99341523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341531	-	ELM99341531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341532	-	ELM99341532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341533	-	ELM99341533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341541	-	ELM99341541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341542	-	ELM99341542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341543	-	ELM99341543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341551	-	ELM99341551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341552	-	ELM99341552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341553	-	ELM99341553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341561	-	ELM99341561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341562	-	ELM99341562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341563	-	ELM99341563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341571	-	ELM99341571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341572	-	ELM99341572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341573	-	ELM99341573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341581	-	ELM99341581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341582	-	ELM99341582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341583	-	ELM99341583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341591	-	ELM99341591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341592	-	ELM99341592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341593	-	ELM99341593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99341601	-	ELM99341601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99341602	-	ELM99341602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99341603	-	ELM99341603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99342181	-	ELM99342181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342182	-	ELM99342182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342183	-	ELM99342183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99342191	-	ELM99342191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342192	-	ELM99342192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342193	-	ELM99342193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342201	-	ELM99342201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342202	-	ELM99342202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342203	-	ELM99342203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342211	-	ELM99342211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342212	-	ELM99342212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342213	-	ELM99342213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342221	-	ELM99342221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342222	-	ELM99342222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342223	-	ELM99342223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342231	-	ELM99342231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342232	-	ELM99342232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342233	-	ELM99342233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342241	-	ELM99342241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342242	-	ELM99342242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342243	-	ELM99342243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342251	-	ELM99342251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342252	-	ELM99342252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342253	-	ELM99342253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342261	-	ELM99342261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342262	-	ELM99342262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342263	-	ELM99342263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342271	-	ELM99342271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342272	-	ELM99342272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342273	-	ELM99342273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342281	-	ELM99342281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342282	-	ELM99342282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342283	-	ELM99342283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342291	-	ELM99342291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342292	-	ELM99342292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342293	-	ELM99342293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342301	-	ELM99342301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342302	-	ELM99342302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342303	-	ELM99342303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342311	-	ELM99342311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342312	-	ELM99342312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342313	-	ELM99342313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342321	-	ELM99342321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342322	-	ELM99342322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342323	-	ELM99342323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342331	-	ELM99342331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342332	-	ELM99342332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342333	-	ELM99342333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342341	-	ELM99342341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342342	-	ELM99342342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342343	-	ELM99342343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342351	-	ELM99342351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342352	-	ELM99342352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342353	-	ELM99342353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342361	-	ELM99342361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342362	-	ELM99342362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342363	-	ELM99342363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342371	-	ELM99342371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342372	-	ELM99342372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342373	-	ELM99342373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342381	-	ELM99342381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342382	-	ELM99342382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342383	-	ELM99342383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342391	-	ELM99342391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342392	-	ELM99342392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342393	-	ELM99342393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342401	-	ELM99342401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342402	-	ELM99342402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342403	-	ELM99342403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342411	-	ELM99342411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342412	-	ELM99342412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342413	-	ELM99342413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342421	-	ELM99342421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99342422	-	ELM99342422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342423	-	ELM99342423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342431	-	ELM99342431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342432	-	ELM99342432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342433	-	ELM99342433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342441	-	ELM99342441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342442	-	ELM99342442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342443	-	ELM99342443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342451	-	ELM99342451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342452	-	ELM99342452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342453	-	ELM99342453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342461	-	ELM99342461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342462	-	ELM99342462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342463	-	ELM99342463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342471	-	ELM99342471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342472	-	ELM99342472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342473	-	ELM99342473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342481	-	ELM99342481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342482	-	ELM99342482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342483	-	ELM99342483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342491	-	ELM99342491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342492	-	ELM99342492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342493	-	ELM99342493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342501	-	ELM99342501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342502	-	ELM99342502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342503	-	ELM99342503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342511	-	ELM99342511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342512	-	ELM99342512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342513	-	ELM99342513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342521	-	ELM99342521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342522	-	ELM99342522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342523	-	ELM99342523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342531	-	ELM99342531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342532	-	ELM99342532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342533	-	ELM99342533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342541	-	ELM99342541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342542	-	ELM99342542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342543	-	ELM99342543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342551	-	ELM99342551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342552	-	ELM99342552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342553	-	ELM99342553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342561	-	ELM99342561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342562	-	ELM99342562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342563	-	ELM99342563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342571	-	ELM99342571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342572	-	ELM99342572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342573	-	ELM99342573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342581	-	ELM99342581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342582	-	ELM99342582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342583	-	ELM99342583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342591	-	ELM99342591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342592	-	ELM99342592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342593	-	ELM99342593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99342601	-	ELM99342601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99342602	-	ELM99342602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99342603	-	ELM99342603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343181	-	ELM99343181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343182	-	ELM99343182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343183	-	ELM99343183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343191	-	ELM99343191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343192	-	ELM99343192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343193	-	ELM99343193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343201	-	ELM99343201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343202	-	ELM99343202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343203	-	ELM99343203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343211	-	ELM99343211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343212	-	ELM99343212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343213	-	ELM99343213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343221	-	ELM99343221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343222	-	ELM99343222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99343223	-	ELM99343223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343231	-	ELM99343231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343232	-	ELM99343232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343233	-	ELM99343233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343241	-	ELM99343241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343242	-	ELM99343242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343243	-	ELM99343243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343251	-	ELM99343251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343252	-	ELM99343252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343253	-	ELM99343253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343261	-	ELM99343261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343262	-	ELM99343262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343263	-	ELM99343263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343271	-	ELM99343271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343272	-	ELM99343272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343273	-	ELM99343273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343281	-	ELM99343281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343282	-	ELM99343282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343283	-	ELM99343283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343291	-	ELM99343291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343292	-	ELM99343292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343293	-	ELM99343293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343301	-	ELM99343301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343302	-	ELM99343302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343303	-	ELM99343303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343311	-	ELM99343311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343312	-	ELM99343312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343313	-	ELM99343313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343321	-	ELM99343321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343322	-	ELM99343322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343323	-	ELM99343323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343331	-	ELM99343331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343332	-	ELM99343332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343333	-	ELM99343333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343341	-	ELM99343341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343342	-	ELM99343342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343343	-	ELM99343343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343351	-	ELM99343351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343352	-	ELM99343352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343353	-	ELM99343353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343361	-	ELM99343361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343362	-	ELM99343362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343363	-	ELM99343363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343371	-	ELM99343371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343372	-	ELM99343372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343373	-	ELM99343373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343381	-	ELM99343381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343382	-	ELM99343382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343383	-	ELM99343383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343391	-	ELM99343391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343392	-	ELM99343392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343393	-	ELM99343393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343401	-	ELM99343401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343402	-	ELM99343402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343403	-	ELM99343403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343411	-	ELM99343411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343412	-	ELM99343412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343413	-	ELM99343413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343421	-	ELM99343421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343422	-	ELM99343422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343423	-	ELM99343423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343431	-	ELM99343431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343432	-	ELM99343432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343433	-	ELM99343433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343441	-	ELM99343441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343442	-	ELM99343442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343443	-	ELM99343443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343451	-	ELM99343451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343452	-	ELM99343452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343453	-	ELM99343453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99343461	-	ELM99343461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343462	-	ELM99343462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343463	-	ELM99343463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343471	-	ELM99343471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343472	-	ELM99343472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343473	-	ELM99343473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343481	-	ELM99343481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343482	-	ELM99343482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343483	-	ELM99343483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343491	-	ELM99343491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343492	-	ELM99343492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343493	-	ELM99343493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343501	-	ELM99343501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343502	-	ELM99343502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343503	-	ELM99343503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343511	-	ELM99343511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343512	-	ELM99343512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343513	-	ELM99343513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343521	-	ELM99343521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343522	-	ELM99343522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343523	-	ELM99343523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343531	-	ELM99343531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343532	-	ELM99343532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343533	-	ELM99343533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343541	-	ELM99343541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343542	-	ELM99343542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343543	-	ELM99343543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343551	-	ELM99343551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343552	-	ELM99343552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343553	-	ELM99343553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343561	-	ELM99343561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343562	-	ELM99343562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343563	-	ELM99343563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343571	-	ELM99343571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343572	-	ELM99343572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343573	-	ELM99343573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343581	-	ELM99343581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343582	-	ELM99343582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343583	-	ELM99343583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343591	-	ELM99343591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343592	-	ELM99343592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343593	-	ELM99343593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99343601	-	ELM99343601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99343602	-	ELM99343602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99343603	-	ELM99343603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99351181	-	ELM99351181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351182	-	ELM99351182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351183	-	ELM99351183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351191	-	ELM99351191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351192	-	ELM99351192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351193	-	ELM99351193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351201	-	ELM99351201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351202	-	ELM99351202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351203	-	ELM99351203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351211	-	ELM99351211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351212	-	ELM99351212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351213	-	ELM99351213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351221	-	ELM99351221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351222	-	ELM99351222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351223	-	ELM99351223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351231	-	ELM99351231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351232	-	ELM99351232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351233	-	ELM99351233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351241	-	ELM99351241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351242	-	ELM99351242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351243	-	ELM99351243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351251	-	ELM99351251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351252	-	ELM99351252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351253	-	ELM99351253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351261	-	ELM99351261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99351262	-	ELM99351262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351263	-	ELM99351263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351271	-	ELM99351271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351272	-	ELM99351272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351273	-	ELM99351273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351281	-	ELM99351281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351282	-	ELM99351282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351283	-	ELM99351283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351291	-	ELM99351291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351292	-	ELM99351292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351293	-	ELM99351293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351301	-	ELM99351301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351302	-	ELM99351302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351303	-	ELM99351303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351311	-	ELM99351311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351312	-	ELM99351312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351313	-	ELM99351313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351321	-	ELM99351321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351322	-	ELM99351322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351323	-	ELM99351323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351331	-	ELM99351331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351332	-	ELM99351332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351333	-	ELM99351333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351341	-	ELM99351341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351342	-	ELM99351342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351343	-	ELM99351343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351351	-	ELM99351351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351352	-	ELM99351352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351353	-	ELM99351353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351361	-	ELM99351361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351362	-	ELM99351362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351363	-	ELM99351363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351371	-	ELM99351371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351372	-	ELM99351372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351373	-	ELM99351373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351381	-	ELM99351381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351382	-	ELM99351382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351383	-	ELM99351383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351391	-	ELM99351391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351392	-	ELM99351392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351393	-	ELM99351393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351401	-	ELM99351401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351402	-	ELM99351402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351403	-	ELM99351403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351411	-	ELM99351411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351412	-	ELM99351412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351413	-	ELM99351413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351421	-	ELM99351421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351422	-	ELM99351422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351423	-	ELM99351423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351431	-	ELM99351431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351432	-	ELM99351432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351433	-	ELM99351433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351441	-	ELM99351441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351442	-	ELM99351442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351443	-	ELM99351443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351451	-	ELM99351451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351452	-	ELM99351452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351453	-	ELM99351453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351461	-	ELM99351461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351462	-	ELM99351462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351463	-	ELM99351463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351471	-	ELM99351471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351472	-	ELM99351472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351473	-	ELM99351473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351481	-	ELM99351481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351482	-	ELM99351482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351483	-	ELM99351483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351491	-	ELM99351491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351492	-	ELM99351492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99351493	-	ELM99351493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351501	-	ELM99351501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351502	-	ELM99351502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351503	-	ELM99351503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351511	-	ELM99351511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351512	-	ELM99351512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351513	-	ELM99351513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351521	-	ELM99351521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351522	-	ELM99351522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351523	-	ELM99351523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351531	-	ELM99351531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351532	-	ELM99351532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351533	-	ELM99351533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351541	-	ELM99351541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351542	-	ELM99351542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351543	-	ELM99351543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351551	-	ELM99351551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351552	-	ELM99351552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351553	-	ELM99351553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351561	-	ELM99351561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351562	-	ELM99351562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351563	-	ELM99351563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351571	-	ELM99351571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351572	-	ELM99351572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351573	-	ELM99351573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351581	-	ELM99351581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351582	-	ELM99351582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351583	-	ELM99351583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351591	-	ELM99351591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351592	-	ELM99351592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351593	-	ELM99351593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99351601	-	ELM99351601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99351602	-	ELM99351602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99351603	-	ELM99351603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99352181	-	ELM99352181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352182	-	ELM99352182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352183	-	ELM99352183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352191	-	ELM99352191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352192	-	ELM99352192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352193	-	ELM99352193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352201	-	ELM99352201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352202	-	ELM99352202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352203	-	ELM99352203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352211	-	ELM99352211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352212	-	ELM99352212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352213	-	ELM99352213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352221	-	ELM99352221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352222	-	ELM99352222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352223	-	ELM99352223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352231	-	ELM99352231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352232	-	ELM99352232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352233	-	ELM99352233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352241	-	ELM99352241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352242	-	ELM99352242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352243	-	ELM99352243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352251	-	ELM99352251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352252	-	ELM99352252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352253	-	ELM99352253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352261	-	ELM99352261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352262	-	ELM99352262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352263	-	ELM99352263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352271	-	ELM99352271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352272	-	ELM99352272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352273	-	ELM99352273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352281	-	ELM99352281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352282	-	ELM99352282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352283	-	ELM99352283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352291	-	ELM99352291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352292	-	ELM99352292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352293	-	ELM99352293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99352301	-	ELM99352301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352302	-	ELM99352302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352303	-	ELM99352303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352311	-	ELM99352311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352312	-	ELM99352312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352313	-	ELM99352313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352321	-	ELM99352321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352322	-	ELM99352322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352323	-	ELM99352323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352331	-	ELM99352331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352332	-	ELM99352332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352333	-	ELM99352333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352341	-	ELM99352341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352342	-	ELM99352342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352343	-	ELM99352343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352351	-	ELM99352351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352352	-	ELM99352352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352353	-	ELM99352353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352361	-	ELM99352361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352362	-	ELM99352362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352363	-	ELM99352363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352371	-	ELM99352371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352372	-	ELM99352372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352373	-	ELM99352373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352381	-	ELM99352381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352382	-	ELM99352382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352383	-	ELM99352383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352391	-	ELM99352391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352392	-	ELM99352392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352393	-	ELM99352393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352401	-	ELM99352401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352402	-	ELM99352402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352403	-	ELM99352403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352411	-	ELM99352411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352412	-	ELM99352412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352413	-	ELM99352413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352421	-	ELM99352421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352422	-	ELM99352422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352423	-	ELM99352423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352431	-	ELM99352431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352432	-	ELM99352432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352433	-	ELM99352433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352441	-	ELM99352441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352442	-	ELM99352442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352443	-	ELM99352443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352451	-	ELM99352451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352452	-	ELM99352452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352453	-	ELM99352453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352461	-	ELM99352461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352462	-	ELM99352462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352463	-	ELM99352463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352471	-	ELM99352471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352472	-	ELM99352472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352473	-	ELM99352473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352481	-	ELM99352481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352482	-	ELM99352482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352483	-	ELM99352483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352491	-	ELM99352491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352492	-	ELM99352492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352493	-	ELM99352493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352501	-	ELM99352501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352502	-	ELM99352502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352503	-	ELM99352503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352511	-	ELM99352511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352512	-	ELM99352512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352513	-	ELM99352513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352521	-	ELM99352521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352522	-	ELM99352522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352523	-	ELM99352523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352531	-	ELM99352531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99352532	-	ELM99352532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352533	-	ELM99352533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352541	-	ELM99352541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352542	-	ELM99352542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352543	-	ELM99352543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352551	-	ELM99352551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352552	-	ELM99352552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352553	-	ELM99352553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352561	-	ELM99352561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352562	-	ELM99352562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352563	-	ELM99352563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352571	-	ELM99352571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352572	-	ELM99352572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352573	-	ELM99352573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352581	-	ELM99352581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352582	-	ELM99352582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352583	-	ELM99352583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352591	-	ELM99352591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352592	-	ELM99352592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352593	-	ELM99352593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99352601	-	ELM99352601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99352602	-	ELM99352602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99352603	-	ELM99352603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353181	-	ELM99353181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353182	-	ELM99353182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353183	-	ELM99353183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353191	-	ELM99353191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353192	-	ELM99353192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353193	-	ELM99353193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353201	-	ELM99353201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353202	-	ELM99353202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353203	-	ELM99353203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353211	-	ELM99353211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353212	-	ELM99353212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353213	-	ELM99353213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353221	-	ELM99353221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353222	-	ELM99353222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353223	-	ELM99353223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353231	-	ELM99353231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353232	-	ELM99353232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353233	-	ELM99353233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353241	-	ELM99353241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353242	-	ELM99353242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353243	-	ELM99353243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353251	-	ELM99353251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353252	-	ELM99353252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353253	-	ELM99353253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353261	-	ELM99353261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353262	-	ELM99353262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353263	-	ELM99353263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353271	-	ELM99353271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353272	-	ELM99353272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353273	-	ELM99353273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353281	-	ELM99353281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353282	-	ELM99353282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353283	-	ELM99353283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353291	-	ELM99353291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353292	-	ELM99353292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353293	-	ELM99353293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353301	-	ELM99353301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353302	-	ELM99353302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353303	-	ELM99353303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353311	-	ELM99353311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353312	-	ELM99353312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353313	-	ELM99353313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353321	-	ELM99353321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353322	-	ELM99353322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353323	-	ELM99353323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353331	-	ELM99353331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353332	-	ELM99353332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99353333	-	ELM99353333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353341	-	ELM99353341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353342	-	ELM99353342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353343	-	ELM99353343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353351	-	ELM99353351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353352	-	ELM99353352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353353	-	ELM99353353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353361	-	ELM99353361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353362	-	ELM99353362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353363	-	ELM99353363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353371	-	ELM99353371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353372	-	ELM99353372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353373	-	ELM99353373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353381	-	ELM99353381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353382	-	ELM99353382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353383	-	ELM99353383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353391	-	ELM99353391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353392	-	ELM99353392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353393	-	ELM99353393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353401	-	ELM99353401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353402	-	ELM99353402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353403	-	ELM99353403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353411	-	ELM99353411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353412	-	ELM99353412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353413	-	ELM99353413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353421	-	ELM99353421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353422	-	ELM99353422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353423	-	ELM99353423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353431	-	ELM99353431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353432	-	ELM99353432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353433	-	ELM99353433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353441	-	ELM99353441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353442	-	ELM99353442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353443	-	ELM99353443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353451	-	ELM99353451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353452	-	ELM99353452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353453	-	ELM99353453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353461	-	ELM99353461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353462	-	ELM99353462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353463	-	ELM99353463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353471	-	ELM99353471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353472	-	ELM99353472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353473	-	ELM99353473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353481	-	ELM99353481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353482	-	ELM99353482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353483	-	ELM99353483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353491	-	ELM99353491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353492	-	ELM99353492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353493	-	ELM99353493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353501	-	ELM99353501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353502	-	ELM99353502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353503	-	ELM99353503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353511	-	ELM99353511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353512	-	ELM99353512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353513	-	ELM99353513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353521	-	ELM99353521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353522	-	ELM99353522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353523	-	ELM99353523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353531	-	ELM99353531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353532	-	ELM99353532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353533	-	ELM99353533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353541	-	ELM99353541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353542	-	ELM99353542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353543	-	ELM99353543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353551	-	ELM99353551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353552	-	ELM99353552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353553	-	ELM99353553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353561	-	ELM99353561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353562	-	ELM99353562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353563	-	ELM99353563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99353571	-	ELM99353571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353572	-	ELM99353572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353573	-	ELM99353573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353581	-	ELM99353581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353582	-	ELM99353582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353583	-	ELM99353583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353591	-	ELM99353591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353592	-	ELM99353592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353593	-	ELM99353593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99353601	-	ELM99353601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99353602	-	ELM99353602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99353603	-	ELM99353603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99361181	-	ELM99361181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361182	-	ELM99361182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361183	-	ELM99361183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361191	-	ELM99361191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361192	-	ELM99361192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361193	-	ELM99361193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361201	-	ELM99361201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361202	-	ELM99361202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361203	-	ELM99361203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361211	-	ELM99361211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361212	-	ELM99361212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361213	-	ELM99361213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361221	-	ELM99361221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361222	-	ELM99361222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361223	-	ELM99361223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361231	-	ELM99361231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361232	-	ELM99361232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361233	-	ELM99361233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361241	-	ELM99361241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361242	-	ELM99361242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361243	-	ELM99361243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361251	-	ELM99361251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361252	-	ELM99361252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361253	-	ELM99361253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361261	-	ELM99361261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361262	-	ELM99361262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361263	-	ELM99361263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361271	-	ELM99361271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361272	-	ELM99361272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361273	-	ELM99361273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361281	-	ELM99361281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361282	-	ELM99361282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361283	-	ELM99361283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361291	-	ELM99361291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361292	-	ELM99361292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361293	-	ELM99361293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361301	-	ELM99361301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361302	-	ELM99361302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361303	-	ELM99361303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361311	-	ELM99361311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361312	-	ELM99361312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361313	-	ELM99361313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361321	-	ELM99361321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361322	-	ELM99361322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361323	-	ELM99361323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361331	-	ELM99361331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361332	-	ELM99361332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361333	-	ELM99361333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361341	-	ELM99361341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361342	-	ELM99361342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361343	-	ELM99361343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361351	-	ELM99361351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361352	-	ELM99361352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361353	-	ELM99361353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361361	-	ELM99361361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361362	-	ELM99361362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361363	-	ELM99361363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361371	-	ELM99361371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99361372	-	ELM99361372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361373	-	ELM99361373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361381	-	ELM99361381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361382	-	ELM99361382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361383	-	ELM99361383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361391	-	ELM99361391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361392	-	ELM99361392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361393	-	ELM99361393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361401	-	ELM99361401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361402	-	ELM99361402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361403	-	ELM99361403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361411	-	ELM99361411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361412	-	ELM99361412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361413	-	ELM99361413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361421	-	ELM99361421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361422	-	ELM99361422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361423	-	ELM99361423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361431	-	ELM99361431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361432	-	ELM99361432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361433	-	ELM99361433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361441	-	ELM99361441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361442	-	ELM99361442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361443	-	ELM99361443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361451	-	ELM99361451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361452	-	ELM99361452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361453	-	ELM99361453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361461	-	ELM99361461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361462	-	ELM99361462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361463	-	ELM99361463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361471	-	ELM99361471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361472	-	ELM99361472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361473	-	ELM99361473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361481	-	ELM99361481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361482	-	ELM99361482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361483	-	ELM99361483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361491	-	ELM99361491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361492	-	ELM99361492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361493	-	ELM99361493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361501	-	ELM99361501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361502	-	ELM99361502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361503	-	ELM99361503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361511	-	ELM99361511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361512	-	ELM99361512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361513	-	ELM99361513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361521	-	ELM99361521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361522	-	ELM99361522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361523	-	ELM99361523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361531	-	ELM99361531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361532	-	ELM99361532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361533	-	ELM99361533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361541	-	ELM99361541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361542	-	ELM99361542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361543	-	ELM99361543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361551	-	ELM99361551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361552	-	ELM99361552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361553	-	ELM99361553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361561	-	ELM99361561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361562	-	ELM99361562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361563	-	ELM99361563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361571	-	ELM99361571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361572	-	ELM99361572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361573	-	ELM99361573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361581	-	ELM99361581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361582	-	ELM99361582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361583	-	ELM99361583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361591	-	ELM99361591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361592	-	ELM99361592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99361593	-	ELM99361593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99361601	-	ELM99361601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99361602	-	ELM99361602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99361603	-	ELM99361603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99362181	-	ELM99362181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362182	-	ELM99362182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362183	-	ELM99362183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362191	-	ELM99362191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362192	-	ELM99362192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362193	-	ELM99362193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362201	-	ELM99362201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362202	-	ELM99362202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362203	-	ELM99362203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362211	-	ELM99362211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362212	-	ELM99362212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362213	-	ELM99362213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362221	-	ELM99362221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362222	-	ELM99362222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362223	-	ELM99362223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362231	-	ELM99362231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362232	-	ELM99362232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362233	-	ELM99362233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362241	-	ELM99362241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362242	-	ELM99362242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362243	-	ELM99362243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362251	-	ELM99362251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362252	-	ELM99362252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362253	-	ELM99362253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362261	-	ELM99362261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362262	-	ELM99362262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362263	-	ELM99362263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362271	-	ELM99362271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362272	-	ELM99362272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362273	-	ELM99362273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362281	-	ELM99362281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362282	-	ELM99362282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362283	-	ELM99362283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362291	-	ELM99362291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362292	-	ELM99362292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362293	-	ELM99362293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362301	-	ELM99362301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362302	-	ELM99362302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362303	-	ELM99362303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362311	-	ELM99362311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362312	-	ELM99362312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362313	-	ELM99362313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362321	-	ELM99362321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362322	-	ELM99362322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362323	-	ELM99362323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362331	-	ELM99362331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362332	-	ELM99362332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362333	-	ELM99362333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362341	-	ELM99362341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362342	-	ELM99362342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362343	-	ELM99362343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362351	-	ELM99362351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362352	-	ELM99362352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362353	-	ELM99362353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362361	-	ELM99362361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362362	-	ELM99362362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362363	-	ELM99362363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362371	-	ELM99362371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362372	-	ELM99362372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362373	-	ELM99362373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362381	-	ELM99362381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362382	-	ELM99362382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362383	-	ELM99362383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362391	-	ELM99362391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362392	-	ELM99362392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362393	-	ELM99362393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362401	-	ELM99362401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362402	-	ELM99362402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362403	-	ELM99362403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99362411	-	ELM99362411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362412	-	ELM99362412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362413	-	ELM99362413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362421	-	ELM99362421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362422	-	ELM99362422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362423	-	ELM99362423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362431	-	ELM99362431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362432	-	ELM99362432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362433	-	ELM99362433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362441	-	ELM99362441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362442	-	ELM99362442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362443	-	ELM99362443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362451	-	ELM99362451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362452	-	ELM99362452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362453	-	ELM99362453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362461	-	ELM99362461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362462	-	ELM99362462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362463	-	ELM99362463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362471	-	ELM99362471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362472	-	ELM99362472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362473	-	ELM99362473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362481	-	ELM99362481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362482	-	ELM99362482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362483	-	ELM99362483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362491	-	ELM99362491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362492	-	ELM99362492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362493	-	ELM99362493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362501	-	ELM99362501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362502	-	ELM99362502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362503	-	ELM99362503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362511	-	ELM99362511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362512	-	ELM99362512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362513	-	ELM99362513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362521	-	ELM99362521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362522	-	ELM99362522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362523	-	ELM99362523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362531	-	ELM99362531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362532	-	ELM99362532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362533	-	ELM99362533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362541	-	ELM99362541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362542	-	ELM99362542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362543	-	ELM99362543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362551	-	ELM99362551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362552	-	ELM99362552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362553	-	ELM99362553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362561	-	ELM99362561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362562	-	ELM99362562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362563	-	ELM99362563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362571	-	ELM99362571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362572	-	ELM99362572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362573	-	ELM99362573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362581	-	ELM99362581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362582	-	ELM99362582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362583	-	ELM99362583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362591	-	ELM99362591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362592	-	ELM99362592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362593	-	ELM99362593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99362601	-	ELM99362601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99362602	-	ELM99362602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99362603	-	ELM99362603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363181	-	ELM99363181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363182	-	ELM99363182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363183	-	ELM99363183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363191	-	ELM99363191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363192	-	ELM99363192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363193	-	ELM99363193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363201	-	ELM99363201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363202	-	ELM99363202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363203	-	ELM99363203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363211	-	ELM99363211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99363212	-	ELM99363212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363213	-	ELM99363213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363221	-	ELM99363221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363222	-	ELM99363222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363223	-	ELM99363223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363231	-	ELM99363231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363232	-	ELM99363232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363233	-	ELM99363233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363241	-	ELM99363241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363242	-	ELM99363242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363243	-	ELM99363243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363251	-	ELM99363251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363252	-	ELM99363252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363253	-	ELM99363253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363261	-	ELM99363261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363262	-	ELM99363262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363263	-	ELM99363263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363271	-	ELM99363271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363272	-	ELM99363272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363273	-	ELM99363273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363281	-	ELM99363281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363282	-	ELM99363282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363283	-	ELM99363283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363291	-	ELM99363291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363292	-	ELM99363292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363293	-	ELM99363293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363301	-	ELM99363301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363302	-	ELM99363302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363303	-	ELM99363303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363311	-	ELM99363311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363312	-	ELM99363312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363313	-	ELM99363313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363321	-	ELM99363321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363322	-	ELM99363322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363323	-	ELM99363323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363331	-	ELM99363331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363332	-	ELM99363332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363333	-	ELM99363333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363341	-	ELM99363341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363342	-	ELM99363342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363343	-	ELM99363343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363351	-	ELM99363351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363352	-	ELM99363352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363353	-	ELM99363353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363361	-	ELM99363361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363362	-	ELM99363362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363363	-	ELM99363363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363371	-	ELM99363371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363372	-	ELM99363372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363373	-	ELM99363373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363381	-	ELM99363381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363382	-	ELM99363382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363383	-	ELM99363383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363391	-	ELM99363391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363392	-	ELM99363392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363393	-	ELM99363393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363401	-	ELM99363401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363402	-	ELM99363402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363403	-	ELM99363403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363411	-	ELM99363411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363412	-	ELM99363412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363413	-	ELM99363413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363421	-	ELM99363421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363422	-	ELM99363422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363423	-	ELM99363423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363431	-	ELM99363431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363432	-	ELM99363432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363433	-	ELM99363433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363441	-	ELM99363441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363442	-	ELM99363442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99363443	-	ELM99363443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363451	-	ELM99363451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363452	-	ELM99363452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363453	-	ELM99363453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363461	-	ELM99363461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363462	-	ELM99363462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363463	-	ELM99363463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363471	-	ELM99363471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363472	-	ELM99363472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363473	-	ELM99363473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363481	-	ELM99363481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363482	-	ELM99363482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363483	-	ELM99363483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363491	-	ELM99363491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363492	-	ELM99363492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363493	-	ELM99363493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363501	-	ELM99363501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363502	-	ELM99363502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363503	-	ELM99363503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363511	-	ELM99363511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363512	-	ELM99363512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363513	-	ELM99363513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363521	-	ELM99363521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363522	-	ELM99363522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363523	-	ELM99363523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363531	-	ELM99363531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363532	-	ELM99363532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363533	-	ELM99363533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363541	-	ELM99363541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363542	-	ELM99363542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363543	-	ELM99363543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363551	-	ELM99363551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363552	-	ELM99363552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363553	-	ELM99363553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363561	-	ELM99363561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363562	-	ELM99363562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363563	-	ELM99363563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363571	-	ELM99363571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363572	-	ELM99363572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363573	-	ELM99363573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363581	-	ELM99363581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363582	-	ELM99363582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363583	-	ELM99363583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363591	-	ELM99363591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363592	-	ELM99363592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363593	-	ELM99363593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99363601	-	ELM99363601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99363602	-	ELM99363602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99363603	-	ELM99363603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99371181	-	ELM99371181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371182	-	ELM99371182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371183	-	ELM99371183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371191	-	ELM99371191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371192	-	ELM99371192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371193	-	ELM99371193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371201	-	ELM99371201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371202	-	ELM99371202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371203	-	ELM99371203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371211	-	ELM99371211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371212	-	ELM99371212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371213	-	ELM99371213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371221	-	ELM99371221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371222	-	ELM99371222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371223	-	ELM99371223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371231	-	ELM99371231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371232	-	ELM99371232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371233	-	ELM99371233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371241	-	ELM99371241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371242	-	ELM99371242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371243	-	ELM99371243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99371251	-	ELM99371251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371252	-	ELM99371252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371253	-	ELM99371253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371261	-	ELM99371261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371262	-	ELM99371262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371263	-	ELM99371263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371271	-	ELM99371271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371272	-	ELM99371272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371273	-	ELM99371273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371281	-	ELM99371281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371282	-	ELM99371282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371283	-	ELM99371283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371291	-	ELM99371291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371292	-	ELM99371292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371293	-	ELM99371293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371301	-	ELM99371301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371302	-	ELM99371302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371303	-	ELM99371303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371311	-	ELM99371311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371312	-	ELM99371312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371313	-	ELM99371313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371321	-	ELM99371321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371322	-	ELM99371322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371323	-	ELM99371323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371331	-	ELM99371331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371332	-	ELM99371332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371333	-	ELM99371333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371341	-	ELM99371341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371342	-	ELM99371342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371343	-	ELM99371343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371351	-	ELM99371351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371352	-	ELM99371352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371353	-	ELM99371353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371361	-	ELM99371361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371362	-	ELM99371362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371363	-	ELM99371363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371371	-	ELM99371371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371372	-	ELM99371372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371373	-	ELM99371373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371381	-	ELM99371381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371382	-	ELM99371382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371383	-	ELM99371383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371391	-	ELM99371391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371392	-	ELM99371392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371393	-	ELM99371393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371401	-	ELM99371401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371402	-	ELM99371402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371403	-	ELM99371403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371411	-	ELM99371411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371412	-	ELM99371412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371413	-	ELM99371413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371421	-	ELM99371421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371422	-	ELM99371422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371423	-	ELM99371423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371431	-	ELM99371431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371432	-	ELM99371432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371433	-	ELM99371433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371441	-	ELM99371441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371442	-	ELM99371442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371443	-	ELM99371443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371451	-	ELM99371451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371452	-	ELM99371452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371453	-	ELM99371453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371461	-	ELM99371461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371462	-	ELM99371462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371463	-	ELM99371463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371471	-	ELM99371471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371472	-	ELM99371472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371473	-	ELM99371473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371481	-	ELM99371481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99371482	-	ELM99371482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371483	-	ELM99371483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371491	-	ELM99371491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371492	-	ELM99371492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371493	-	ELM99371493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371501	-	ELM99371501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371502	-	ELM99371502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371503	-	ELM99371503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371511	-	ELM99371511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371512	-	ELM99371512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371513	-	ELM99371513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371521	-	ELM99371521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371522	-	ELM99371522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371523	-	ELM99371523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371531	-	ELM99371531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371532	-	ELM99371532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371533	-	ELM99371533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371541	-	ELM99371541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371542	-	ELM99371542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371543	-	ELM99371543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371551	-	ELM99371551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371552	-	ELM99371552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371553	-	ELM99371553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371561	-	ELM99371561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371562	-	ELM99371562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371563	-	ELM99371563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371571	-	ELM99371571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371572	-	ELM99371572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371573	-	ELM99371573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371581	-	ELM99371581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371582	-	ELM99371582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371583	-	ELM99371583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371591	-	ELM99371591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371592	-	ELM99371592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371593	-	ELM99371593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99371601	-	ELM99371601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99371602	-	ELM99371602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99371603	-	ELM99371603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99372181	-	ELM99372181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372182	-	ELM99372182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372183	-	ELM99372183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372191	-	ELM99372191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372192	-	ELM99372192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372193	-	ELM99372193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372201	-	ELM99372201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372202	-	ELM99372202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372203	-	ELM99372203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372211	-	ELM99372211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372212	-	ELM99372212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372213	-	ELM99372213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372221	-	ELM99372221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372222	-	ELM99372222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372223	-	ELM99372223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372231	-	ELM99372231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372232	-	ELM99372232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372233	-	ELM99372233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372241	-	ELM99372241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372242	-	ELM99372242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372243	-	ELM99372243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372251	-	ELM99372251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372252	-	ELM99372252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372253	-	ELM99372253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372261	-	ELM99372261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372262	-	ELM99372262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372263	-	ELM99372263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372271	-	ELM99372271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372272	-	ELM99372272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372273	-	ELM99372273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372281	-	ELM99372281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372282	-	ELM99372282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99372283	-	ELM99372283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372291	-	ELM99372291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372292	-	ELM99372292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372293	-	ELM99372293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372301	-	ELM99372301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372302	-	ELM99372302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372303	-	ELM99372303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372311	-	ELM99372311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372312	-	ELM99372312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372313	-	ELM99372313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372321	-	ELM99372321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372322	-	ELM99372322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372323	-	ELM99372323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372331	-	ELM99372331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372332	-	ELM99372332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372333	-	ELM99372333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372341	-	ELM99372341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372342	-	ELM99372342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372343	-	ELM99372343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372351	-	ELM99372351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372352	-	ELM99372352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372353	-	ELM99372353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372361	-	ELM99372361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372362	-	ELM99372362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372363	-	ELM99372363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372371	-	ELM99372371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372372	-	ELM99372372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372373	-	ELM99372373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372381	-	ELM99372381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372382	-	ELM99372382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372383	-	ELM99372383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372391	-	ELM99372391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372392	-	ELM99372392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372393	-	ELM99372393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372401	-	ELM99372401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372402	-	ELM99372402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372403	-	ELM99372403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372411	-	ELM99372411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372412	-	ELM99372412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372413	-	ELM99372413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372421	-	ELM99372421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372422	-	ELM99372422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372423	-	ELM99372423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372431	-	ELM99372431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372432	-	ELM99372432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372433	-	ELM99372433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372441	-	ELM99372441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372442	-	ELM99372442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372443	-	ELM99372443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372451	-	ELM99372451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372452	-	ELM99372452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372453	-	ELM99372453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372461	-	ELM99372461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372462	-	ELM99372462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372463	-	ELM99372463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372471	-	ELM99372471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372472	-	ELM99372472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372473	-	ELM99372473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372481	-	ELM99372481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372482	-	ELM99372482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372483	-	ELM99372483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372491	-	ELM99372491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372492	-	ELM99372492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372493	-	ELM99372493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372501	-	ELM99372501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372502	-	ELM99372502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372503	-	ELM99372503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372511	-	ELM99372511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372512	-	ELM99372512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372513	-	ELM99372513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99372521	-	ELM99372521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372522	-	ELM99372522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372523	-	ELM99372523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372531	-	ELM99372531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372532	-	ELM99372532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372533	-	ELM99372533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372541	-	ELM99372541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372542	-	ELM99372542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372543	-	ELM99372543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372551	-	ELM99372551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372552	-	ELM99372552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372553	-	ELM99372553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372561	-	ELM99372561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372562	-	ELM99372562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372563	-	ELM99372563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372571	-	ELM99372571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372572	-	ELM99372572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372573	-	ELM99372573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372581	-	ELM99372581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372582	-	ELM99372582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372583	-	ELM99372583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372591	-	ELM99372591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372592	-	ELM99372592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372593	-	ELM99372593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99372601	-	ELM99372601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99372602	-	ELM99372602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99372603	-	ELM99372603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373181	-	ELM99373181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373182	-	ELM99373182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373183	-	ELM99373183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373191	-	ELM99373191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373192	-	ELM99373192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373193	-	ELM99373193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373201	-	ELM99373201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373202	-	ELM99373202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373203	-	ELM99373203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373211	-	ELM99373211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373212	-	ELM99373212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373213	-	ELM99373213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373221	-	ELM99373221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373222	-	ELM99373222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373223	-	ELM99373223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373231	-	ELM99373231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373232	-	ELM99373232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373233	-	ELM99373233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373241	-	ELM99373241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373242	-	ELM99373242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373243	-	ELM99373243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373251	-	ELM99373251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373252	-	ELM99373252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373253	-	ELM99373253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373261	-	ELM99373261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373262	-	ELM99373262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373263	-	ELM99373263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373271	-	ELM99373271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373272	-	ELM99373272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373273	-	ELM99373273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373281	-	ELM99373281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373282	-	ELM99373282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373283	-	ELM99373283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373291	-	ELM99373291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373292	-	ELM99373292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373293	-	ELM99373293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373301	-	ELM99373301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373302	-	ELM99373302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373303	-	ELM99373303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373311	-	ELM99373311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373312	-	ELM99373312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373313	-	ELM99373313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373321	-	ELM99373321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99373322	-	ELM99373322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373323	-	ELM99373323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373331	-	ELM99373331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373332	-	ELM99373332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373333	-	ELM99373333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373341	-	ELM99373341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373342	-	ELM99373342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373343	-	ELM99373343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373351	-	ELM99373351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373352	-	ELM99373352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373353	-	ELM99373353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373361	-	ELM99373361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373362	-	ELM99373362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373363	-	ELM99373363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373371	-	ELM99373371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373372	-	ELM99373372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373373	-	ELM99373373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373381	-	ELM99373381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373382	-	ELM99373382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373383	-	ELM99373383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373391	-	ELM99373391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373392	-	ELM99373392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373393	-	ELM99373393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373401	-	ELM99373401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373402	-	ELM99373402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373403	-	ELM99373403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373411	-	ELM99373411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373412	-	ELM99373412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373413	-	ELM99373413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373421	-	ELM99373421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373422	-	ELM99373422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373423	-	ELM99373423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373431	-	ELM99373431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373432	-	ELM99373432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373433	-	ELM99373433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373441	-	ELM99373441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373442	-	ELM99373442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373443	-	ELM99373443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373451	-	ELM99373451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373452	-	ELM99373452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373453	-	ELM99373453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373461	-	ELM99373461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373462	-	ELM99373462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373463	-	ELM99373463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373471	-	ELM99373471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373472	-	ELM99373472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373473	-	ELM99373473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373481	-	ELM99373481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373482	-	ELM99373482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373483	-	ELM99373483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373491	-	ELM99373491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373492	-	ELM99373492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373493	-	ELM99373493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373501	-	ELM99373501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373502	-	ELM99373502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373503	-	ELM99373503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373511	-	ELM99373511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373512	-	ELM99373512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373513	-	ELM99373513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373521	-	ELM99373521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373522	-	ELM99373522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373523	-	ELM99373523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373531	-	ELM99373531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373532	-	ELM99373532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373533	-	ELM99373533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373541	-	ELM99373541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373542	-	ELM99373542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373543	-	ELM99373543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373551	-	ELM99373551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373552	-	ELM99373552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99373553	-	ELM99373553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373561	-	ELM99373561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373562	-	ELM99373562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373563	-	ELM99373563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373571	-	ELM99373571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373572	-	ELM99373572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373573	-	ELM99373573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373581	-	ELM99373581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373582	-	ELM99373582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373583	-	ELM99373583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373591	-	ELM99373591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373592	-	ELM99373592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373593	-	ELM99373593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99373601	-	ELM99373601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99373602	-	ELM99373602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99373603	-	ELM99373603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99381181	-	ELM99381181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381182	-	ELM99381182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381183	-	ELM99381183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381191	-	ELM99381191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381192	-	ELM99381192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381193	-	ELM99381193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381201	-	ELM99381201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381202	-	ELM99381202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381203	-	ELM99381203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381211	-	ELM99381211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381212	-	ELM99381212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381213	-	ELM99381213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381221	-	ELM99381221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381222	-	ELM99381222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381223	-	ELM99381223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381231	-	ELM99381231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381232	-	ELM99381232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381233	-	ELM99381233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381241	-	ELM99381241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381242	-	ELM99381242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381243	-	ELM99381243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381251	-	ELM99381251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381252	-	ELM99381252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381253	-	ELM99381253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381261	-	ELM99381261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381262	-	ELM99381262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381263	-	ELM99381263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381271	-	ELM99381271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381272	-	ELM99381272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381273	-	ELM99381273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381281	-	ELM99381281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381282	-	ELM99381282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381283	-	ELM99381283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381291	-	ELM99381291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381292	-	ELM99381292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381293	-	ELM99381293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381301	-	ELM99381301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381302	-	ELM99381302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381303	-	ELM99381303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381311	-	ELM99381311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381312	-	ELM99381312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381313	-	ELM99381313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381321	-	ELM99381321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381322	-	ELM99381322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381323	-	ELM99381323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381331	-	ELM99381331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381332	-	ELM99381332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381333	-	ELM99381333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381341	-	ELM99381341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381342	-	ELM99381342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381343	-	ELM99381343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381351	-	ELM99381351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381352	-	ELM99381352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381353	-	ELM99381353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99381361	-	ELM99381361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381362	-	ELM99381362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381363	-	ELM99381363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381371	-	ELM99381371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381372	-	ELM99381372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381373	-	ELM99381373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381381	-	ELM99381381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381382	-	ELM99381382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381383	-	ELM99381383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381391	-	ELM99381391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381392	-	ELM99381392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381393	-	ELM99381393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381401	-	ELM99381401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381402	-	ELM99381402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381403	-	ELM99381403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381411	-	ELM99381411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381412	-	ELM99381412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381413	-	ELM99381413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381421	-	ELM99381421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381422	-	ELM99381422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381423	-	ELM99381423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381431	-	ELM99381431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381432	-	ELM99381432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381433	-	ELM99381433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381441	-	ELM99381441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381442	-	ELM99381442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381443	-	ELM99381443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381451	-	ELM99381451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381452	-	ELM99381452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381453	-	ELM99381453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381461	-	ELM99381461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381462	-	ELM99381462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381463	-	ELM99381463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381471	-	ELM99381471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381472	-	ELM99381472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381473	-	ELM99381473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381481	-	ELM99381481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381482	-	ELM99381482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381483	-	ELM99381483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381491	-	ELM99381491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381492	-	ELM99381492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381493	-	ELM99381493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381501	-	ELM99381501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381502	-	ELM99381502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381503	-	ELM99381503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381511	-	ELM99381511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381512	-	ELM99381512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381513	-	ELM99381513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381521	-	ELM99381521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381522	-	ELM99381522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381523	-	ELM99381523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381531	-	ELM99381531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381532	-	ELM99381532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381533	-	ELM99381533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381541	-	ELM99381541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381542	-	ELM99381542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381543	-	ELM99381543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381551	-	ELM99381551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381552	-	ELM99381552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381553	-	ELM99381553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381561	-	ELM99381561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381562	-	ELM99381562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381563	-	ELM99381563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381571	-	ELM99381571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381572	-	ELM99381572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381573	-	ELM99381573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381581	-	ELM99381581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381582	-	ELM99381582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381583	-	ELM99381583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381591	-	ELM99381591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99381592	-	ELM99381592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381593	-	ELM99381593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99381601	-	ELM99381601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99381602	-	ELM99381602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99381603	-	ELM99381603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99382181	-	ELM99382181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382182	-	ELM99382182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382183	-	ELM99382183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382191	-	ELM99382191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382192	-	ELM99382192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382193	-	ELM99382193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382201	-	ELM99382201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382202	-	ELM99382202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382203	-	ELM99382203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382211	-	ELM99382211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382212	-	ELM99382212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382213	-	ELM99382213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382221	-	ELM99382221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382222	-	ELM99382222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382223	-	ELM99382223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382231	-	ELM99382231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382232	-	ELM99382232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382233	-	ELM99382233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382241	-	ELM99382241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382242	-	ELM99382242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382243	-	ELM99382243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382251	-	ELM99382251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382252	-	ELM99382252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382253	-	ELM99382253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382261	-	ELM99382261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382262	-	ELM99382262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382263	-	ELM99382263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382271	-	ELM99382271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382272	-	ELM99382272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382273	-	ELM99382273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382281	-	ELM99382281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382282	-	ELM99382282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382283	-	ELM99382283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382291	-	ELM99382291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382292	-	ELM99382292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382293	-	ELM99382293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382301	-	ELM99382301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382302	-	ELM99382302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382303	-	ELM99382303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382311	-	ELM99382311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382312	-	ELM99382312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382313	-	ELM99382313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382321	-	ELM99382321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382322	-	ELM99382322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382323	-	ELM99382323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382331	-	ELM99382331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382332	-	ELM99382332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382333	-	ELM99382333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382341	-	ELM99382341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382342	-	ELM99382342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382343	-	ELM99382343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382351	-	ELM99382351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382352	-	ELM99382352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382353	-	ELM99382353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382361	-	ELM99382361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382362	-	ELM99382362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382363	-	ELM99382363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382371	-	ELM99382371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382372	-	ELM99382372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382373	-	ELM99382373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382381	-	ELM99382381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382382	-	ELM99382382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382383	-	ELM99382383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382391	-	ELM99382391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382392	-	ELM99382392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99382393	-	ELM99382393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382401	-	ELM99382401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382402	-	ELM99382402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382403	-	ELM99382403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382411	-	ELM99382411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382412	-	ELM99382412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382413	-	ELM99382413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382421	-	ELM99382421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382422	-	ELM99382422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382423	-	ELM99382423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382431	-	ELM99382431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382432	-	ELM99382432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382433	-	ELM99382433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382441	-	ELM99382441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382442	-	ELM99382442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382443	-	ELM99382443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382451	-	ELM99382451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382452	-	ELM99382452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382453	-	ELM99382453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382461	-	ELM99382461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382462	-	ELM99382462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382463	-	ELM99382463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382471	-	ELM99382471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382472	-	ELM99382472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382473	-	ELM99382473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382481	-	ELM99382481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382482	-	ELM99382482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382483	-	ELM99382483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382491	-	ELM99382491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382492	-	ELM99382492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382493	-	ELM99382493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382501	-	ELM99382501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382502	-	ELM99382502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382503	-	ELM99382503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382511	-	ELM99382511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382512	-	ELM99382512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382513	-	ELM99382513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382521	-	ELM99382521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382522	-	ELM99382522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382523	-	ELM99382523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382531	-	ELM99382531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382532	-	ELM99382532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382533	-	ELM99382533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382541	-	ELM99382541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382542	-	ELM99382542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382543	-	ELM99382543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382551	-	ELM99382551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382552	-	ELM99382552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382553	-	ELM99382553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382561	-	ELM99382561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382562	-	ELM99382562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382563	-	ELM99382563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382571	-	ELM99382571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382572	-	ELM99382572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382573	-	ELM99382573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382581	-	ELM99382581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382582	-	ELM99382582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382583	-	ELM99382583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382591	-	ELM99382591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382592	-	ELM99382592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382593	-	ELM99382593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99382601	-	ELM99382601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99382602	-	ELM99382602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99382603	-	ELM99382603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383181	-	ELM99383181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383182	-	ELM99383182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383183	-	ELM99383183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383191	-	ELM99383191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383192	-	ELM99383192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383193	-	ELM99383193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99383201	-	ELM99383201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383202	-	ELM99383202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383203	-	ELM99383203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383211	-	ELM99383211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383212	-	ELM99383212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383213	-	ELM99383213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383221	-	ELM99383221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383222	-	ELM99383222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383223	-	ELM99383223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383231	-	ELM99383231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383232	-	ELM99383232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383233	-	ELM99383233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383241	-	ELM99383241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383242	-	ELM99383242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383243	-	ELM99383243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383251	-	ELM99383251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383252	-	ELM99383252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383253	-	ELM99383253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383261	-	ELM99383261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383262	-	ELM99383262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383263	-	ELM99383263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383271	-	ELM99383271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383272	-	ELM99383272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383273	-	ELM99383273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383281	-	ELM99383281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383282	-	ELM99383282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383283	-	ELM99383283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383291	-	ELM99383291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383292	-	ELM99383292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383293	-	ELM99383293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383301	-	ELM99383301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383302	-	ELM99383302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383303	-	ELM99383303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383311	-	ELM99383311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383312	-	ELM99383312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383313	-	ELM99383313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383321	-	ELM99383321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383322	-	ELM99383322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383323	-	ELM99383323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383331	-	ELM99383331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383332	-	ELM99383332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383333	-	ELM99383333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383341	-	ELM99383341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383342	-	ELM99383342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383343	-	ELM99383343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383351	-	ELM99383351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383352	-	ELM99383352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383353	-	ELM99383353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383361	-	ELM99383361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383362	-	ELM99383362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383363	-	ELM99383363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383371	-	ELM99383371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383372	-	ELM99383372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383373	-	ELM99383373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383381	-	ELM99383381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383382	-	ELM99383382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383383	-	ELM99383383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383391	-	ELM99383391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383392	-	ELM99383392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383393	-	ELM99383393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383401	-	ELM99383401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383402	-	ELM99383402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383403	-	ELM99383403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383411	-	ELM99383411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383412	-	ELM99383412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383413	-	ELM99383413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383421	-	ELM99383421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383422	-	ELM99383422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383423	-	ELM99383423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383431	-	ELM99383431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99383432	-	ELM99383432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383433	-	ELM99383433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383441	-	ELM99383441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383442	-	ELM99383442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383443	-	ELM99383443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383451	-	ELM99383451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383452	-	ELM99383452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383453	-	ELM99383453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383461	-	ELM99383461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383462	-	ELM99383462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383463	-	ELM99383463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383471	-	ELM99383471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383472	-	ELM99383472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383473	-	ELM99383473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383481	-	ELM99383481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383482	-	ELM99383482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383483	-	ELM99383483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383491	-	ELM99383491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383492	-	ELM99383492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383493	-	ELM99383493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383501	-	ELM99383501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383502	-	ELM99383502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383503	-	ELM99383503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383511	-	ELM99383511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383512	-	ELM99383512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383513	-	ELM99383513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383521	-	ELM99383521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383522	-	ELM99383522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383523	-	ELM99383523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383531	-	ELM99383531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383532	-	ELM99383532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383533	-	ELM99383533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383541	-	ELM99383541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383542	-	ELM99383542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383543	-	ELM99383543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383551	-	ELM99383551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383552	-	ELM99383552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383553	-	ELM99383553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383561	-	ELM99383561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383562	-	ELM99383562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383563	-	ELM99383563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383571	-	ELM99383571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383572	-	ELM99383572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383573	-	ELM99383573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383581	-	ELM99383581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383582	-	ELM99383582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383583	-	ELM99383583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383591	-	ELM99383591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383592	-	ELM99383592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383593	-	ELM99383593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99383601	-	ELM99383601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99383602	-	ELM99383602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99383603	-	ELM99383603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99391181	-	ELM99391181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391182	-	ELM99391182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391183	-	ELM99391183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391191	-	ELM99391191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391192	-	ELM99391192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391193	-	ELM99391193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391201	-	ELM99391201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391202	-	ELM99391202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391203	-	ELM99391203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391211	-	ELM99391211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391212	-	ELM99391212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391213	-	ELM99391213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391221	-	ELM99391221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391222	-	ELM99391222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391223	-	ELM99391223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391231	-	ELM99391231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391232	-	ELM99391232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99391233	-	ELM99391233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391241	-	ELM99391241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391242	-	ELM99391242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391243	-	ELM99391243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391251	-	ELM99391251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391252	-	ELM99391252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391253	-	ELM99391253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391261	-	ELM99391261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391262	-	ELM99391262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391263	-	ELM99391263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391271	-	ELM99391271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391272	-	ELM99391272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391273	-	ELM99391273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391281	-	ELM99391281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391282	-	ELM99391282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391283	-	ELM99391283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391291	-	ELM99391291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391292	-	ELM99391292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391293	-	ELM99391293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391301	-	ELM99391301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391302	-	ELM99391302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391303	-	ELM99391303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391311	-	ELM99391311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391312	-	ELM99391312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391313	-	ELM99391313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391321	-	ELM99391321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391322	-	ELM99391322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391323	-	ELM99391323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391331	-	ELM99391331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391332	-	ELM99391332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391333	-	ELM99391333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391341	-	ELM99391341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391342	-	ELM99391342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391343	-	ELM99391343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391351	-	ELM99391351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391352	-	ELM99391352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391353	-	ELM99391353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391361	-	ELM99391361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391362	-	ELM99391362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391363	-	ELM99391363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391371	-	ELM99391371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391372	-	ELM99391372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391373	-	ELM99391373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391381	-	ELM99391381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391382	-	ELM99391382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391383	-	ELM99391383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391391	-	ELM99391391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391392	-	ELM99391392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391393	-	ELM99391393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391401	-	ELM99391401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391402	-	ELM99391402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391403	-	ELM99391403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391411	-	ELM99391411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391412	-	ELM99391412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391413	-	ELM99391413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391421	-	ELM99391421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391422	-	ELM99391422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391423	-	ELM99391423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391431	-	ELM99391431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391432	-	ELM99391432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391433	-	ELM99391433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391441	-	ELM99391441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391442	-	ELM99391442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391443	-	ELM99391443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391451	-	ELM99391451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391452	-	ELM99391452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391453	-	ELM99391453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391461	-	ELM99391461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391462	-	ELM99391462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391463	-	ELM99391463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99391471	-	ELM99391471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391472	-	ELM99391472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391473	-	ELM99391473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391481	-	ELM99391481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391482	-	ELM99391482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391483	-	ELM99391483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391491	-	ELM99391491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391492	-	ELM99391492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391493	-	ELM99391493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391501	-	ELM99391501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391502	-	ELM99391502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391503	-	ELM99391503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391511	-	ELM99391511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391512	-	ELM99391512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391513	-	ELM99391513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391521	-	ELM99391521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391522	-	ELM99391522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391523	-	ELM99391523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391531	-	ELM99391531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391532	-	ELM99391532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391533	-	ELM99391533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391541	-	ELM99391541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391542	-	ELM99391542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391543	-	ELM99391543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391551	-	ELM99391551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391552	-	ELM99391552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391553	-	ELM99391553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391561	-	ELM99391561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391562	-	ELM99391562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391563	-	ELM99391563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391571	-	ELM99391571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391572	-	ELM99391572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391573	-	ELM99391573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391581	-	ELM99391581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391582	-	ELM99391582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391583	-	ELM99391583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391591	-	ELM99391591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391592	-	ELM99391592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391593	-	ELM99391593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99391601	-	ELM99391601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99391602	-	ELM99391602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99391603	-	ELM99391603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99392181	-	ELM99392181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392182	-	ELM99392182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392183	-	ELM99392183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392191	-	ELM99392191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392192	-	ELM99392192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392193	-	ELM99392193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392201	-	ELM99392201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392202	-	ELM99392202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392203	-	ELM99392203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392211	-	ELM99392211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392212	-	ELM99392212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392213	-	ELM99392213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392221	-	ELM99392221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392222	-	ELM99392222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392223	-	ELM99392223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392231	-	ELM99392231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392232	-	ELM99392232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392233	-	ELM99392233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392241	-	ELM99392241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392242	-	ELM99392242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392243	-	ELM99392243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392251	-	ELM99392251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392252	-	ELM99392252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392253	-	ELM99392253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392261	-	ELM99392261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392262	-	ELM99392262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392263	-	ELM99392263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392271	-	ELM99392271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99392272	-	ELM99392272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392273	-	ELM99392273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392281	-	ELM99392281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392282	-	ELM99392282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392283	-	ELM99392283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392291	-	ELM99392291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392292	-	ELM99392292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392293	-	ELM99392293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392301	-	ELM99392301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392302	-	ELM99392302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392303	-	ELM99392303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392311	-	ELM99392311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392312	-	ELM99392312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392313	-	ELM99392313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392321	-	ELM99392321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392322	-	ELM99392322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392323	-	ELM99392323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392331	-	ELM99392331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392332	-	ELM99392332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392333	-	ELM99392333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392341	-	ELM99392341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392342	-	ELM99392342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392343	-	ELM99392343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392351	-	ELM99392351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392352	-	ELM99392352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392353	-	ELM99392353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392361	-	ELM99392361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392362	-	ELM99392362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392363	-	ELM99392363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392371	-	ELM99392371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392372	-	ELM99392372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392373	-	ELM99392373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392381	-	ELM99392381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392382	-	ELM99392382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392383	-	ELM99392383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392391	-	ELM99392391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392392	-	ELM99392392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392393	-	ELM99392393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392401	-	ELM99392401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392402	-	ELM99392402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392403	-	ELM99392403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392411	-	ELM99392411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392412	-	ELM99392412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392413	-	ELM99392413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392421	-	ELM99392421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392422	-	ELM99392422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392423	-	ELM99392423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392431	-	ELM99392431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392432	-	ELM99392432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392433	-	ELM99392433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392441	-	ELM99392441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392442	-	ELM99392442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392443	-	ELM99392443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392451	-	ELM99392451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392452	-	ELM99392452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392453	-	ELM99392453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392461	-	ELM99392461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392462	-	ELM99392462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392463	-	ELM99392463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392471	-	ELM99392471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392472	-	ELM99392472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392473	-	ELM99392473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392481	-	ELM99392481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392482	-	ELM99392482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392483	-	ELM99392483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392491	-	ELM99392491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392492	-	ELM99392492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392493	-	ELM99392493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392501	-	ELM99392501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392502	-	ELM99392502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99392503	-	ELM99392503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392511	-	ELM99392511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392512	-	ELM99392512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392513	-	ELM99392513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392521	-	ELM99392521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392522	-	ELM99392522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392523	-	ELM99392523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392531	-	ELM99392531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392532	-	ELM99392532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392533	-	ELM99392533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392541	-	ELM99392541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392542	-	ELM99392542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392543	-	ELM99392543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392551	-	ELM99392551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392552	-	ELM99392552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392553	-	ELM99392553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392561	-	ELM99392561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392562	-	ELM99392562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392563	-	ELM99392563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392571	-	ELM99392571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392572	-	ELM99392572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392573	-	ELM99392573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392581	-	ELM99392581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392582	-	ELM99392582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392583	-	ELM99392583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392591	-	ELM99392591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392592	-	ELM99392592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392593	-	ELM99392593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99392601	-	ELM99392601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99392602	-	ELM99392602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99392603	-	ELM99392603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393181	-	ELM99393181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393182	-	ELM99393182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393183	-	ELM99393183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393191	-	ELM99393191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393192	-	ELM99393192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393193	-	ELM99393193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393201	-	ELM99393201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393202	-	ELM99393202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393203	-	ELM99393203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393211	-	ELM99393211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393212	-	ELM99393212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393213	-	ELM99393213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393221	-	ELM99393221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393222	-	ELM99393222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393223	-	ELM99393223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393231	-	ELM99393231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393232	-	ELM99393232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393233	-	ELM99393233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393241	-	ELM99393241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393242	-	ELM99393242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393243	-	ELM99393243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393251	-	ELM99393251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393252	-	ELM99393252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393253	-	ELM99393253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393261	-	ELM99393261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393262	-	ELM99393262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393263	-	ELM99393263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393271	-	ELM99393271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393272	-	ELM99393272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393273	-	ELM99393273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393281	-	ELM99393281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393282	-	ELM99393282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393283	-	ELM99393283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393291	-	ELM99393291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393292	-	ELM99393292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393293	-	ELM99393293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393301	-	ELM99393301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393302	-	ELM99393302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393303	-	ELM99393303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99393311	-	ELM99393311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393312	-	ELM99393312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393313	-	ELM99393313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393321	-	ELM99393321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393322	-	ELM99393322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393323	-	ELM99393323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393331	-	ELM99393331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393332	-	ELM99393332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393333	-	ELM99393333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393341	-	ELM99393341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393342	-	ELM99393342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393343	-	ELM99393343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393351	-	ELM99393351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393352	-	ELM99393352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393353	-	ELM99393353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393361	-	ELM99393361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393362	-	ELM99393362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393363	-	ELM99393363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393371	-	ELM99393371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393372	-	ELM99393372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393373	-	ELM99393373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393381	-	ELM99393381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393382	-	ELM99393382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393383	-	ELM99393383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393391	-	ELM99393391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393392	-	ELM99393392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393393	-	ELM99393393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393401	-	ELM99393401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393402	-	ELM99393402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393403	-	ELM99393403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393411	-	ELM99393411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393412	-	ELM99393412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393413	-	ELM99393413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393421	-	ELM99393421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393422	-	ELM99393422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393423	-	ELM99393423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393431	-	ELM99393431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393432	-	ELM99393432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393433	-	ELM99393433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393441	-	ELM99393441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393442	-	ELM99393442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393443	-	ELM99393443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393451	-	ELM99393451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393452	-	ELM99393452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393453	-	ELM99393453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393461	-	ELM99393461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393462	-	ELM99393462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393463	-	ELM99393463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393471	-	ELM99393471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393472	-	ELM99393472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393473	-	ELM99393473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393481	-	ELM99393481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393482	-	ELM99393482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393483	-	ELM99393483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393491	-	ELM99393491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393492	-	ELM99393492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393493	-	ELM99393493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393501	-	ELM99393501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393502	-	ELM99393502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393503	-	ELM99393503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393511	-	ELM99393511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393512	-	ELM99393512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393513	-	ELM99393513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393521	-	ELM99393521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393522	-	ELM99393522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393523	-	ELM99393523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393531	-	ELM99393531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393532	-	ELM99393532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393533	-	ELM99393533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393541	-	ELM99393541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99393542	-	ELM99393542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393543	-	ELM99393543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393551	-	ELM99393551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393552	-	ELM99393552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393553	-	ELM99393553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393561	-	ELM99393561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393562	-	ELM99393562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393563	-	ELM99393563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393571	-	ELM99393571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393572	-	ELM99393572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393573	-	ELM99393573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393581	-	ELM99393581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393582	-	ELM99393582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393583	-	ELM99393583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393591	-	ELM99393591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393592	-	ELM99393592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393593	-	ELM99393593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99393601	-	ELM99393601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99393602	-	ELM99393602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99393603	-	ELM99393603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99401181	-	ELM99401181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401182	-	ELM99401182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401183	-	ELM99401183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401191	-	ELM99401191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401192	-	ELM99401192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401193	-	ELM99401193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401201	-	ELM99401201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401202	-	ELM99401202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401203	-	ELM99401203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401211	-	ELM99401211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401212	-	ELM99401212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401213	-	ELM99401213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401221	-	ELM99401221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401222	-	ELM99401222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401223	-	ELM99401223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401231	-	ELM99401231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401232	-	ELM99401232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401233	-	ELM99401233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401241	-	ELM99401241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401242	-	ELM99401242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401243	-	ELM99401243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401251	-	ELM99401251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401252	-	ELM99401252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401253	-	ELM99401253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401261	-	ELM99401261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401262	-	ELM99401262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401263	-	ELM99401263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401271	-	ELM99401271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401272	-	ELM99401272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401273	-	ELM99401273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401281	-	ELM99401281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401282	-	ELM99401282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401283	-	ELM99401283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401291	-	ELM99401291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401292	-	ELM99401292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401293	-	ELM99401293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401301	-	ELM99401301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401302	-	ELM99401302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401303	-	ELM99401303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401311	-	ELM99401311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401312	-	ELM99401312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401313	-	ELM99401313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401321	-	ELM99401321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401322	-	ELM99401322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401323	-	ELM99401323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401331	-	ELM99401331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401332	-	ELM99401332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401333	-	ELM99401333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401341	-	ELM99401341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401342	-	ELM99401342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99401343	-	ELM99401343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401351	-	ELM99401351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401352	-	ELM99401352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401353	-	ELM99401353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401361	-	ELM99401361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401362	-	ELM99401362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401363	-	ELM99401363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401371	-	ELM99401371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401372	-	ELM99401372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401373	-	ELM99401373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401381	-	ELM99401381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401382	-	ELM99401382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401383	-	ELM99401383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401391	-	ELM99401391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401392	-	ELM99401392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401393	-	ELM99401393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401401	-	ELM99401401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401402	-	ELM99401402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401403	-	ELM99401403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401411	-	ELM99401411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401412	-	ELM99401412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401413	-	ELM99401413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401421	-	ELM99401421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401422	-	ELM99401422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401423	-	ELM99401423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401431	-	ELM99401431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401432	-	ELM99401432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401433	-	ELM99401433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401441	-	ELM99401441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401442	-	ELM99401442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401443	-	ELM99401443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401451	-	ELM99401451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401452	-	ELM99401452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401453	-	ELM99401453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401461	-	ELM99401461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401462	-	ELM99401462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401463	-	ELM99401463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401471	-	ELM99401471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401472	-	ELM99401472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401473	-	ELM99401473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401481	-	ELM99401481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401482	-	ELM99401482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401483	-	ELM99401483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401491	-	ELM99401491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401492	-	ELM99401492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401493	-	ELM99401493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401501	-	ELM99401501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401502	-	ELM99401502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401503	-	ELM99401503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401511	-	ELM99401511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401512	-	ELM99401512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401513	-	ELM99401513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401521	-	ELM99401521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401522	-	ELM99401522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401523	-	ELM99401523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401531	-	ELM99401531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401532	-	ELM99401532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401533	-	ELM99401533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401541	-	ELM99401541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401542	-	ELM99401542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401543	-	ELM99401543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401551	-	ELM99401551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401552	-	ELM99401552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401553	-	ELM99401553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401561	-	ELM99401561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401562	-	ELM99401562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401563	-	ELM99401563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401571	-	ELM99401571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401572	-	ELM99401572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401573	-	ELM99401573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99401581	-	ELM99401581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401582	-	ELM99401582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401583	-	ELM99401583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401591	-	ELM99401591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401592	-	ELM99401592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401593	-	ELM99401593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99401601	-	ELM99401601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99401602	-	ELM99401602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99401603	-	ELM99401603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99402181	-	ELM99402181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402182	-	ELM99402182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402183	-	ELM99402183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402191	-	ELM99402191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402192	-	ELM99402192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402193	-	ELM99402193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402201	-	ELM99402201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402202	-	ELM99402202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402203	-	ELM99402203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402211	-	ELM99402211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402212	-	ELM99402212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402213	-	ELM99402213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402221	-	ELM99402221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402222	-	ELM99402222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402223	-	ELM99402223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402231	-	ELM99402231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402232	-	ELM99402232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402233	-	ELM99402233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402241	-	ELM99402241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402242	-	ELM99402242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402243	-	ELM99402243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402251	-	ELM99402251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402252	-	ELM99402252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402253	-	ELM99402253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402261	-	ELM99402261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402262	-	ELM99402262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402263	-	ELM99402263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402271	-	ELM99402271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402272	-	ELM99402272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402273	-	ELM99402273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402281	-	ELM99402281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402282	-	ELM99402282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402283	-	ELM99402283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402291	-	ELM99402291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402292	-	ELM99402292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402293	-	ELM99402293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402301	-	ELM99402301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402302	-	ELM99402302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402303	-	ELM99402303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402311	-	ELM99402311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402312	-	ELM99402312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402313	-	ELM99402313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402321	-	ELM99402321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402322	-	ELM99402322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402323	-	ELM99402323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402331	-	ELM99402331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402332	-	ELM99402332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402333	-	ELM99402333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402341	-	ELM99402341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402342	-	ELM99402342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402343	-	ELM99402343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402351	-	ELM99402351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402352	-	ELM99402352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402353	-	ELM99402353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402361	-	ELM99402361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402362	-	ELM99402362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402363	-	ELM99402363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402371	-	ELM99402371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402372	-	ELM99402372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402373	-	ELM99402373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402381	-	ELM99402381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99402382	-	ELM99402382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402383	-	ELM99402383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402391	-	ELM99402391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402392	-	ELM99402392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402393	-	ELM99402393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402401	-	ELM99402401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402402	-	ELM99402402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402403	-	ELM99402403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402411	-	ELM99402411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402412	-	ELM99402412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402413	-	ELM99402413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402421	-	ELM99402421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402422	-	ELM99402422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402423	-	ELM99402423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402431	-	ELM99402431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402432	-	ELM99402432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402433	-	ELM99402433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402441	-	ELM99402441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402442	-	ELM99402442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402443	-	ELM99402443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402451	-	ELM99402451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402452	-	ELM99402452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402453	-	ELM99402453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402461	-	ELM99402461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402462	-	ELM99402462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402463	-	ELM99402463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402471	-	ELM99402471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402472	-	ELM99402472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402473	-	ELM99402473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402481	-	ELM99402481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402482	-	ELM99402482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402483	-	ELM99402483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402491	-	ELM99402491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402492	-	ELM99402492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402493	-	ELM99402493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402501	-	ELM99402501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402502	-	ELM99402502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402503	-	ELM99402503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402511	-	ELM99402511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402512	-	ELM99402512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402513	-	ELM99402513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402521	-	ELM99402521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402522	-	ELM99402522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402523	-	ELM99402523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402531	-	ELM99402531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402532	-	ELM99402532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402533	-	ELM99402533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402541	-	ELM99402541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402542	-	ELM99402542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402543	-	ELM99402543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402551	-	ELM99402551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402552	-	ELM99402552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402553	-	ELM99402553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402561	-	ELM99402561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402562	-	ELM99402562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402563	-	ELM99402563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402571	-	ELM99402571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402572	-	ELM99402572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402573	-	ELM99402573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402581	-	ELM99402581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402582	-	ELM99402582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402583	-	ELM99402583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402591	-	ELM99402591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402592	-	ELM99402592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402593	-	ELM99402593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99402601	-	ELM99402601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99402602	-	ELM99402602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99402603	-	ELM99402603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403181	-	ELM99403181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403182	-	ELM99403182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99403183	-	ELM99403183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403191	-	ELM99403191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403192	-	ELM99403192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403193	-	ELM99403193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403201	-	ELM99403201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403202	-	ELM99403202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403203	-	ELM99403203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403211	-	ELM99403211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403212	-	ELM99403212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403213	-	ELM99403213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403221	-	ELM99403221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403222	-	ELM99403222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403223	-	ELM99403223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403231	-	ELM99403231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403232	-	ELM99403232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403233	-	ELM99403233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403241	-	ELM99403241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403242	-	ELM99403242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403243	-	ELM99403243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403251	-	ELM99403251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403252	-	ELM99403252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403253	-	ELM99403253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403261	-	ELM99403261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403262	-	ELM99403262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403263	-	ELM99403263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403271	-	ELM99403271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403272	-	ELM99403272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403273	-	ELM99403273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403281	-	ELM99403281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403282	-	ELM99403282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403283	-	ELM99403283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403291	-	ELM99403291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403292	-	ELM99403292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403293	-	ELM99403293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403301	-	ELM99403301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403302	-	ELM99403302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403303	-	ELM99403303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403311	-	ELM99403311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403312	-	ELM99403312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403313	-	ELM99403313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403321	-	ELM99403321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403322	-	ELM99403322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403323	-	ELM99403323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403331	-	ELM99403331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403332	-	ELM99403332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403333	-	ELM99403333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403341	-	ELM99403341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403342	-	ELM99403342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403343	-	ELM99403343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403351	-	ELM99403351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403352	-	ELM99403352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403353	-	ELM99403353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403361	-	ELM99403361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403362	-	ELM99403362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403363	-	ELM99403363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403371	-	ELM99403371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403372	-	ELM99403372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403373	-	ELM99403373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403381	-	ELM99403381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403382	-	ELM99403382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403383	-	ELM99403383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403391	-	ELM99403391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403392	-	ELM99403392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403393	-	ELM99403393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403401	-	ELM99403401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403402	-	ELM99403402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403403	-	ELM99403403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403411	-	ELM99403411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403412	-	ELM99403412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403413	-	ELM99403413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99403421	-	ELM99403421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403422	-	ELM99403422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403423	-	ELM99403423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403431	-	ELM99403431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403432	-	ELM99403432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403433	-	ELM99403433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403441	-	ELM99403441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403442	-	ELM99403442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403443	-	ELM99403443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403451	-	ELM99403451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403452	-	ELM99403452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403453	-	ELM99403453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403461	-	ELM99403461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403462	-	ELM99403462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403463	-	ELM99403463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403471	-	ELM99403471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403472	-	ELM99403472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403473	-	ELM99403473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403481	-	ELM99403481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403482	-	ELM99403482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403483	-	ELM99403483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403491	-	ELM99403491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403492	-	ELM99403492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403493	-	ELM99403493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403501	-	ELM99403501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403502	-	ELM99403502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403503	-	ELM99403503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403511	-	ELM99403511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403512	-	ELM99403512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403513	-	ELM99403513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403521	-	ELM99403521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403522	-	ELM99403522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403523	-	ELM99403523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403531	-	ELM99403531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403532	-	ELM99403532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403533	-	ELM99403533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403541	-	ELM99403541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403542	-	ELM99403542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403543	-	ELM99403543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403551	-	ELM99403551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403552	-	ELM99403552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403553	-	ELM99403553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403561	-	ELM99403561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403562	-	ELM99403562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403563	-	ELM99403563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403571	-	ELM99403571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403572	-	ELM99403572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403573	-	ELM99403573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403581	-	ELM99403581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403582	-	ELM99403582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403583	-	ELM99403583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403591	-	ELM99403591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403592	-	ELM99403592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403593	-	ELM99403593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99403601	-	ELM99403601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99403602	-	ELM99403602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99403603	-	ELM99403603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99411181	-	ELM99411181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411182	-	ELM99411182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411183	-	ELM99411183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411191	-	ELM99411191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411192	-	ELM99411192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411193	-	ELM99411193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411201	-	ELM99411201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411202	-	ELM99411202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411203	-	ELM99411203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411211	-	ELM99411211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411212	-	ELM99411212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411213	-	ELM99411213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411221	-	ELM99411221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99411222	-	ELM99411222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411223	-	ELM99411223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411231	-	ELM99411231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411232	-	ELM99411232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411233	-	ELM99411233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411241	-	ELM99411241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411242	-	ELM99411242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411243	-	ELM99411243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411251	-	ELM99411251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411252	-	ELM99411252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411253	-	ELM99411253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411261	-	ELM99411261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411262	-	ELM99411262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411263	-	ELM99411263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411271	-	ELM99411271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411272	-	ELM99411272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411273	-	ELM99411273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411281	-	ELM99411281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411282	-	ELM99411282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411283	-	ELM99411283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411291	-	ELM99411291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411292	-	ELM99411292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411293	-	ELM99411293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411301	-	ELM99411301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411302	-	ELM99411302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411303	-	ELM99411303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411311	-	ELM99411311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411312	-	ELM99411312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411313	-	ELM99411313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411321	-	ELM99411321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411322	-	ELM99411322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411323	-	ELM99411323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411331	-	ELM99411331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411332	-	ELM99411332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411333	-	ELM99411333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411341	-	ELM99411341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411342	-	ELM99411342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411343	-	ELM99411343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411351	-	ELM99411351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411352	-	ELM99411352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411353	-	ELM99411353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411361	-	ELM99411361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411362	-	ELM99411362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411363	-	ELM99411363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411371	-	ELM99411371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411372	-	ELM99411372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411373	-	ELM99411373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411381	-	ELM99411381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411382	-	ELM99411382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411383	-	ELM99411383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411391	-	ELM99411391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411392	-	ELM99411392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411393	-	ELM99411393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411401	-	ELM99411401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411402	-	ELM99411402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411403	-	ELM99411403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411411	-	ELM99411411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411412	-	ELM99411412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411413	-	ELM99411413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411421	-	ELM99411421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411422	-	ELM99411422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411423	-	ELM99411423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411431	-	ELM99411431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411432	-	ELM99411432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411433	-	ELM99411433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411441	-	ELM99411441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411442	-	ELM99411442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411443	-	ELM99411443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411451	-	ELM99411451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411452	-	ELM99411452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99411453	-	ELM99411453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411461	-	ELM99411461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411462	-	ELM99411462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411463	-	ELM99411463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411471	-	ELM99411471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411472	-	ELM99411472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411473	-	ELM99411473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411481	-	ELM99411481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411482	-	ELM99411482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411483	-	ELM99411483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411491	-	ELM99411491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411492	-	ELM99411492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411493	-	ELM99411493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411501	-	ELM99411501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411502	-	ELM99411502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411503	-	ELM99411503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411511	-	ELM99411511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411512	-	ELM99411512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411513	-	ELM99411513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411521	-	ELM99411521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411522	-	ELM99411522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411523	-	ELM99411523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411531	-	ELM99411531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411532	-	ELM99411532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411533	-	ELM99411533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411541	-	ELM99411541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411542	-	ELM99411542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411543	-	ELM99411543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411551	-	ELM99411551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411552	-	ELM99411552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411553	-	ELM99411553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411561	-	ELM99411561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411562	-	ELM99411562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411563	-	ELM99411563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411571	-	ELM99411571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411572	-	ELM99411572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411573	-	ELM99411573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411581	-	ELM99411581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411582	-	ELM99411582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411583	-	ELM99411583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411591	-	ELM99411591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411592	-	ELM99411592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411593	-	ELM99411593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99411601	-	ELM99411601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99411602	-	ELM99411602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99411603	-	ELM99411603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99412181	-	ELM99412181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412182	-	ELM99412182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412183	-	ELM99412183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412191	-	ELM99412191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412192	-	ELM99412192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412193	-	ELM99412193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412201	-	ELM99412201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412202	-	ELM99412202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412203	-	ELM99412203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412211	-	ELM99412211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412212	-	ELM99412212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412213	-	ELM99412213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412221	-	ELM99412221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412222	-	ELM99412222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412223	-	ELM99412223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412231	-	ELM99412231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412232	-	ELM99412232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412233	-	ELM99412233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412241	-	ELM99412241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412242	-	ELM99412242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412243	-	ELM99412243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412251	-	ELM99412251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412252	-	ELM99412252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412253	-	ELM99412253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99412261	-	ELM99412261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412262	-	ELM99412262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412263	-	ELM99412263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412271	-	ELM99412271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412272	-	ELM99412272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412273	-	ELM99412273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412281	-	ELM99412281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412282	-	ELM99412282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412283	-	ELM99412283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412291	-	ELM99412291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412292	-	ELM99412292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412293	-	ELM99412293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412301	-	ELM99412301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412302	-	ELM99412302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412303	-	ELM99412303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412311	-	ELM99412311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412312	-	ELM99412312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412313	-	ELM99412313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412321	-	ELM99412321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412322	-	ELM99412322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412323	-	ELM99412323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412331	-	ELM99412331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412332	-	ELM99412332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412333	-	ELM99412333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412341	-	ELM99412341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412342	-	ELM99412342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412343	-	ELM99412343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412351	-	ELM99412351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412352	-	ELM99412352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412353	-	ELM99412353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412361	-	ELM99412361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412362	-	ELM99412362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412363	-	ELM99412363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412371	-	ELM99412371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412372	-	ELM99412372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412373	-	ELM99412373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412381	-	ELM99412381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412382	-	ELM99412382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412383	-	ELM99412383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412391	-	ELM99412391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412392	-	ELM99412392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412393	-	ELM99412393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412401	-	ELM99412401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412402	-	ELM99412402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412403	-	ELM99412403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412411	-	ELM99412411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412412	-	ELM99412412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412413	-	ELM99412413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412421	-	ELM99412421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412422	-	ELM99412422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412423	-	ELM99412423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412431	-	ELM99412431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412432	-	ELM99412432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412433	-	ELM99412433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412441	-	ELM99412441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412442	-	ELM99412442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412443	-	ELM99412443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412451	-	ELM99412451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412452	-	ELM99412452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412453	-	ELM99412453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412461	-	ELM99412461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412462	-	ELM99412462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412463	-	ELM99412463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412471	-	ELM99412471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412472	-	ELM99412472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412473	-	ELM99412473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412481	-	ELM99412481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412482	-	ELM99412482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412483	-	ELM99412483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412491	-	ELM99412491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99412492	-	ELM99412492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412493	-	ELM99412493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412501	-	ELM99412501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412502	-	ELM99412502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412503	-	ELM99412503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412511	-	ELM99412511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412512	-	ELM99412512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412513	-	ELM99412513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412521	-	ELM99412521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412522	-	ELM99412522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412523	-	ELM99412523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412531	-	ELM99412531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412532	-	ELM99412532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412533	-	ELM99412533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412541	-	ELM99412541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412542	-	ELM99412542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412543	-	ELM99412543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412551	-	ELM99412551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412552	-	ELM99412552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412553	-	ELM99412553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412561	-	ELM99412561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412562	-	ELM99412562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412563	-	ELM99412563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412571	-	ELM99412571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412572	-	ELM99412572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412573	-	ELM99412573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412581	-	ELM99412581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412582	-	ELM99412582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412583	-	ELM99412583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412591	-	ELM99412591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412592	-	ELM99412592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412593	-	ELM99412593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99412601	-	ELM99412601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99412602	-	ELM99412602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99412603	-	ELM99412603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413181	-	ELM99413181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413182	-	ELM99413182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413183	-	ELM99413183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413191	-	ELM99413191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413192	-	ELM99413192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413193	-	ELM99413193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413201	-	ELM99413201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413202	-	ELM99413202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413203	-	ELM99413203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413211	-	ELM99413211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413212	-	ELM99413212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413213	-	ELM99413213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413221	-	ELM99413221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413222	-	ELM99413222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413223	-	ELM99413223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413231	-	ELM99413231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413232	-	ELM99413232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413233	-	ELM99413233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413241	-	ELM99413241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413242	-	ELM99413242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413243	-	ELM99413243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413251	-	ELM99413251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413252	-	ELM99413252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413253	-	ELM99413253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413261	-	ELM99413261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413262	-	ELM99413262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413263	-	ELM99413263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413271	-	ELM99413271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413272	-	ELM99413272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413273	-	ELM99413273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413281	-	ELM99413281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413282	-	ELM99413282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413283	-	ELM99413283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413291	-	ELM99413291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413292	-	ELM99413292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99413293	-	ELM99413293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413301	-	ELM99413301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413302	-	ELM99413302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413303	-	ELM99413303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413311	-	ELM99413311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413312	-	ELM99413312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413313	-	ELM99413313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413321	-	ELM99413321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413322	-	ELM99413322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413323	-	ELM99413323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413331	-	ELM99413331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413332	-	ELM99413332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413333	-	ELM99413333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413341	-	ELM99413341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413342	-	ELM99413342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413343	-	ELM99413343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413351	-	ELM99413351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413352	-	ELM99413352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413353	-	ELM99413353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413361	-	ELM99413361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413362	-	ELM99413362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413363	-	ELM99413363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413371	-	ELM99413371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413372	-	ELM99413372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413373	-	ELM99413373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413381	-	ELM99413381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413382	-	ELM99413382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413383	-	ELM99413383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413391	-	ELM99413391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413392	-	ELM99413392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413393	-	ELM99413393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413401	-	ELM99413401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413402	-	ELM99413402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413403	-	ELM99413403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413411	-	ELM99413411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413412	-	ELM99413412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413413	-	ELM99413413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413421	-	ELM99413421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413422	-	ELM99413422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413423	-	ELM99413423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413431	-	ELM99413431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413432	-	ELM99413432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413433	-	ELM99413433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413441	-	ELM99413441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413442	-	ELM99413442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413443	-	ELM99413443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413451	-	ELM99413451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413452	-	ELM99413452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413453	-	ELM99413453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413461	-	ELM99413461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413462	-	ELM99413462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413463	-	ELM99413463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413471	-	ELM99413471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413472	-	ELM99413472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413473	-	ELM99413473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413481	-	ELM99413481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413482	-	ELM99413482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413483	-	ELM99413483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413491	-	ELM99413491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413492	-	ELM99413492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413493	-	ELM99413493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413501	-	ELM99413501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413502	-	ELM99413502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413503	-	ELM99413503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413511	-	ELM99413511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413512	-	ELM99413512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413513	-	ELM99413513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413521	-	ELM99413521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413522	-	ELM99413522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413523	-	ELM99413523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99413531	-	ELM99413531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413532	-	ELM99413532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413533	-	ELM99413533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413541	-	ELM99413541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413542	-	ELM99413542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413543	-	ELM99413543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413551	-	ELM99413551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413552	-	ELM99413552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413553	-	ELM99413553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413561	-	ELM99413561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413562	-	ELM99413562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413563	-	ELM99413563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413571	-	ELM99413571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413572	-	ELM99413572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413573	-	ELM99413573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413581	-	ELM99413581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413582	-	ELM99413582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413583	-	ELM99413583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413591	-	ELM99413591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413592	-	ELM99413592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413593	-	ELM99413593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99413601	-	ELM99413601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99413602	-	ELM99413602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99413603	-	ELM99413603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99421181	-	ELM99421181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421182	-	ELM99421182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421183	-	ELM99421183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421191	-	ELM99421191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421192	-	ELM99421192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421193	-	ELM99421193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421201	-	ELM99421201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421202	-	ELM99421202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421203	-	ELM99421203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421211	-	ELM99421211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421212	-	ELM99421212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421213	-	ELM99421213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421221	-	ELM99421221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421222	-	ELM99421222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421223	-	ELM99421223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421231	-	ELM99421231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421232	-	ELM99421232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421233	-	ELM99421233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421241	-	ELM99421241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421242	-	ELM99421242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421243	-	ELM99421243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421251	-	ELM99421251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421252	-	ELM99421252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421253	-	ELM99421253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421261	-	ELM99421261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421262	-	ELM99421262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421263	-	ELM99421263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421271	-	ELM99421271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421272	-	ELM99421272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421273	-	ELM99421273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421281	-	ELM99421281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421282	-	ELM99421282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421283	-	ELM99421283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421291	-	ELM99421291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421292	-	ELM99421292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421293	-	ELM99421293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421301	-	ELM99421301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421302	-	ELM99421302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421303	-	ELM99421303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421311	-	ELM99421311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421312	-	ELM99421312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421313	-	ELM99421313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421321	-	ELM99421321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421322	-	ELM99421322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421323	-	ELM99421323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421331	-	ELM99421331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99421332	-	ELM99421332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421333	-	ELM99421333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421341	-	ELM99421341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421342	-	ELM99421342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421343	-	ELM99421343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421351	-	ELM99421351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421352	-	ELM99421352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421353	-	ELM99421353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421361	-	ELM99421361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421362	-	ELM99421362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421363	-	ELM99421363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421371	-	ELM99421371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421372	-	ELM99421372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421373	-	ELM99421373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421381	-	ELM99421381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421382	-	ELM99421382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421383	-	ELM99421383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421391	-	ELM99421391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421392	-	ELM99421392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421393	-	ELM99421393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421401	-	ELM99421401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421402	-	ELM99421402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421403	-	ELM99421403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421411	-	ELM99421411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421412	-	ELM99421412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421413	-	ELM99421413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421421	-	ELM99421421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421422	-	ELM99421422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421423	-	ELM99421423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421431	-	ELM99421431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421432	-	ELM99421432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421433	-	ELM99421433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421441	-	ELM99421441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421442	-	ELM99421442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421443	-	ELM99421443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421451	-	ELM99421451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421452	-	ELM99421452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421453	-	ELM99421453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421461	-	ELM99421461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421462	-	ELM99421462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421463	-	ELM99421463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421471	-	ELM99421471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421472	-	ELM99421472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421473	-	ELM99421473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421481	-	ELM99421481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421482	-	ELM99421482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421483	-	ELM99421483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421491	-	ELM99421491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421492	-	ELM99421492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421493	-	ELM99421493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421501	-	ELM99421501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421502	-	ELM99421502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421503	-	ELM99421503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421511	-	ELM99421511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421512	-	ELM99421512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421513	-	ELM99421513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421521	-	ELM99421521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421522	-	ELM99421522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421523	-	ELM99421523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421531	-	ELM99421531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421532	-	ELM99421532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421533	-	ELM99421533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421541	-	ELM99421541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421542	-	ELM99421542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421543	-	ELM99421543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421551	-	ELM99421551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421552	-	ELM99421552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421553	-	ELM99421553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421561	-	ELM99421561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421562	-	ELM99421562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99421563	-	ELM99421563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421571	-	ELM99421571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421572	-	ELM99421572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421573	-	ELM99421573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421581	-	ELM99421581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421582	-	ELM99421582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421583	-	ELM99421583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421591	-	ELM99421591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421592	-	ELM99421592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421593	-	ELM99421593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99421601	-	ELM99421601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99421602	-	ELM99421602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99421603	-	ELM99421603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99422181	-	ELM99422181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422182	-	ELM99422182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422183	-	ELM99422183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422191	-	ELM99422191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422192	-	ELM99422192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422193	-	ELM99422193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422201	-	ELM99422201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422202	-	ELM99422202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422203	-	ELM99422203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422211	-	ELM99422211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422212	-	ELM99422212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422213	-	ELM99422213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422221	-	ELM99422221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422222	-	ELM99422222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422223	-	ELM99422223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422231	-	ELM99422231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422232	-	ELM99422232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422233	-	ELM99422233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422241	-	ELM99422241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422242	-	ELM99422242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422243	-	ELM99422243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422251	-	ELM99422251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422252	-	ELM99422252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422253	-	ELM99422253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422261	-	ELM99422261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422262	-	ELM99422262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422263	-	ELM99422263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422271	-	ELM99422271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422272	-	ELM99422272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422273	-	ELM99422273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422281	-	ELM99422281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422282	-	ELM99422282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422283	-	ELM99422283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422291	-	ELM99422291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422292	-	ELM99422292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422293	-	ELM99422293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422301	-	ELM99422301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422302	-	ELM99422302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422303	-	ELM99422303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422311	-	ELM99422311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422312	-	ELM99422312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422313	-	ELM99422313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422321	-	ELM99422321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422322	-	ELM99422322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422323	-	ELM99422323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422331	-	ELM99422331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422332	-	ELM99422332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422333	-	ELM99422333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422341	-	ELM99422341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422342	-	ELM99422342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422343	-	ELM99422343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422351	-	ELM99422351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422352	-	ELM99422352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422353	-	ELM99422353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422361	-	ELM99422361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422362	-	ELM99422362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422363	-	ELM99422363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99422371	-	ELM99422371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422372	-	ELM99422372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422373	-	ELM99422373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422381	-	ELM99422381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422382	-	ELM99422382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422383	-	ELM99422383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422391	-	ELM99422391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422392	-	ELM99422392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422393	-	ELM99422393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422401	-	ELM99422401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422402	-	ELM99422402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422403	-	ELM99422403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422411	-	ELM99422411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422412	-	ELM99422412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422413	-	ELM99422413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422421	-	ELM99422421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422422	-	ELM99422422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422423	-	ELM99422423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422431	-	ELM99422431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422432	-	ELM99422432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422433	-	ELM99422433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422441	-	ELM99422441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422442	-	ELM99422442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422443	-	ELM99422443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422451	-	ELM99422451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422452	-	ELM99422452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422453	-	ELM99422453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422461	-	ELM99422461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422462	-	ELM99422462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422463	-	ELM99422463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422471	-	ELM99422471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422472	-	ELM99422472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422473	-	ELM99422473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422481	-	ELM99422481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422482	-	ELM99422482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422483	-	ELM99422483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422491	-	ELM99422491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422492	-	ELM99422492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422493	-	ELM99422493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422501	-	ELM99422501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422502	-	ELM99422502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422503	-	ELM99422503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422511	-	ELM99422511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422512	-	ELM99422512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422513	-	ELM99422513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422521	-	ELM99422521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422522	-	ELM99422522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422523	-	ELM99422523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422531	-	ELM99422531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422532	-	ELM99422532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422533	-	ELM99422533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422541	-	ELM99422541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422542	-	ELM99422542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422543	-	ELM99422543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422551	-	ELM99422551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422552	-	ELM99422552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422553	-	ELM99422553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422561	-	ELM99422561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422562	-	ELM99422562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422563	-	ELM99422563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422571	-	ELM99422571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422572	-	ELM99422572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422573	-	ELM99422573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422581	-	ELM99422581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422582	-	ELM99422582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422583	-	ELM99422583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422591	-	ELM99422591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99422592	-	ELM99422592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422593	-	ELM99422593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99422601	-	ELM99422601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99422602	-	ELM99422602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99422603	-	ELM99422603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423181	-	ELM99423181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423182	-	ELM99423182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423183	-	ELM99423183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423191	-	ELM99423191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423192	-	ELM99423192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423193	-	ELM99423193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423201	-	ELM99423201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423202	-	ELM99423202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423203	-	ELM99423203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423211	-	ELM99423211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423212	-	ELM99423212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423213	-	ELM99423213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423221	-	ELM99423221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423222	-	ELM99423222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423223	-	ELM99423223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423231	-	ELM99423231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423232	-	ELM99423232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423233	-	ELM99423233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423241	-	ELM99423241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423242	-	ELM99423242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423243	-	ELM99423243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423251	-	ELM99423251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423252	-	ELM99423252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423253	-	ELM99423253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423261	-	ELM99423261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423262	-	ELM99423262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423263	-	ELM99423263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423271	-	ELM99423271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423272	-	ELM99423272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423273	-	ELM99423273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423281	-	ELM99423281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423282	-	ELM99423282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423283	-	ELM99423283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423291	-	ELM99423291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423292	-	ELM99423292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423293	-	ELM99423293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423301	-	ELM99423301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423302	-	ELM99423302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423303	-	ELM99423303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423311	-	ELM99423311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423312	-	ELM99423312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423313	-	ELM99423313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423321	-	ELM99423321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423322	-	ELM99423322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423323	-	ELM99423323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423331	-	ELM99423331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423332	-	ELM99423332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423333	-	ELM99423333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423341	-	ELM99423341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423342	-	ELM99423342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423343	-	ELM99423343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423351	-	ELM99423351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423352	-	ELM99423352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423353	-	ELM99423353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423361	-	ELM99423361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423362	-	ELM99423362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423363	-	ELM99423363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423371	-	ELM99423371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423372	-	ELM99423372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423373	-	ELM99423373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423381	-	ELM99423381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423382	-	ELM99423382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423383	-	ELM99423383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423391	-	ELM99423391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423392	-	ELM99423392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423393	-	ELM99423393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423401	-	ELM99423401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423402	-	ELM99423402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99423403	-	ELM99423403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423411	-	ELM99423411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423412	-	ELM99423412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423413	-	ELM99423413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423421	-	ELM99423421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423422	-	ELM99423422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423423	-	ELM99423423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423431	-	ELM99423431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423432	-	ELM99423432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423433	-	ELM99423433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423441	-	ELM99423441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423442	-	ELM99423442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423443	-	ELM99423443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423451	-	ELM99423451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423452	-	ELM99423452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423453	-	ELM99423453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423461	-	ELM99423461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423462	-	ELM99423462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423463	-	ELM99423463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423471	-	ELM99423471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423472	-	ELM99423472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423473	-	ELM99423473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423481	-	ELM99423481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423482	-	ELM99423482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423483	-	ELM99423483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423491	-	ELM99423491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423492	-	ELM99423492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423493	-	ELM99423493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423501	-	ELM99423501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423502	-	ELM99423502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423503	-	ELM99423503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423511	-	ELM99423511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423512	-	ELM99423512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423513	-	ELM99423513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423521	-	ELM99423521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423522	-	ELM99423522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423523	-	ELM99423523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423531	-	ELM99423531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423532	-	ELM99423532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423533	-	ELM99423533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423541	-	ELM99423541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423542	-	ELM99423542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423543	-	ELM99423543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423551	-	ELM99423551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423552	-	ELM99423552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423553	-	ELM99423553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423561	-	ELM99423561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423562	-	ELM99423562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423563	-	ELM99423563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423571	-	ELM99423571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423572	-	ELM99423572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423573	-	ELM99423573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423581	-	ELM99423581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423582	-	ELM99423582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423583	-	ELM99423583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423591	-	ELM99423591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423592	-	ELM99423592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423593	-	ELM99423593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99423601	-	ELM99423601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99423602	-	ELM99423602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99423603	-	ELM99423603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99431181	-	ELM99431181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431182	-	ELM99431182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431183	-	ELM99431183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431191	-	ELM99431191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431192	-	ELM99431192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431193	-	ELM99431193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431201	-	ELM99431201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431202	-	ELM99431202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431203	-	ELM99431203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99431211	-	ELM99431211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431212	-	ELM99431212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431213	-	ELM99431213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431221	-	ELM99431221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431222	-	ELM99431222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431223	-	ELM99431223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431231	-	ELM99431231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431232	-	ELM99431232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431233	-	ELM99431233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431241	-	ELM99431241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431242	-	ELM99431242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431243	-	ELM99431243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431251	-	ELM99431251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431252	-	ELM99431252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431253	-	ELM99431253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431261	-	ELM99431261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431262	-	ELM99431262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431263	-	ELM99431263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431271	-	ELM99431271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431272	-	ELM99431272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431273	-	ELM99431273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431281	-	ELM99431281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431282	-	ELM99431282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431283	-	ELM99431283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431291	-	ELM99431291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431292	-	ELM99431292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431293	-	ELM99431293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431301	-	ELM99431301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431302	-	ELM99431302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431303	-	ELM99431303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431311	-	ELM99431311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431312	-	ELM99431312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431313	-	ELM99431313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431321	-	ELM99431321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431322	-	ELM99431322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431323	-	ELM99431323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431331	-	ELM99431331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431332	-	ELM99431332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431333	-	ELM99431333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431341	-	ELM99431341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431342	-	ELM99431342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431343	-	ELM99431343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431351	-	ELM99431351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431352	-	ELM99431352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431353	-	ELM99431353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431361	-	ELM99431361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431362	-	ELM99431362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431363	-	ELM99431363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431371	-	ELM99431371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431372	-	ELM99431372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431373	-	ELM99431373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431381	-	ELM99431381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431382	-	ELM99431382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431383	-	ELM99431383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431391	-	ELM99431391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431392	-	ELM99431392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431393	-	ELM99431393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431401	-	ELM99431401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431402	-	ELM99431402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431403	-	ELM99431403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431411	-	ELM99431411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431412	-	ELM99431412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431413	-	ELM99431413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431421	-	ELM99431421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431422	-	ELM99431422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431423	-	ELM99431423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431431	-	ELM99431431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431432	-	ELM99431432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431433	-	ELM99431433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431441	-	ELM99431441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99431442	-	ELM99431442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431443	-	ELM99431443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431451	-	ELM99431451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431452	-	ELM99431452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431453	-	ELM99431453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431461	-	ELM99431461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431462	-	ELM99431462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431463	-	ELM99431463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431471	-	ELM99431471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431472	-	ELM99431472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431473	-	ELM99431473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431481	-	ELM99431481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431482	-	ELM99431482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431483	-	ELM99431483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431491	-	ELM99431491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431492	-	ELM99431492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431493	-	ELM99431493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431501	-	ELM99431501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431502	-	ELM99431502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431503	-	ELM99431503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431511	-	ELM99431511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431512	-	ELM99431512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431513	-	ELM99431513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431521	-	ELM99431521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431522	-	ELM99431522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431523	-	ELM99431523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431531	-	ELM99431531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431532	-	ELM99431532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431533	-	ELM99431533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431541	-	ELM99431541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431542	-	ELM99431542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431543	-	ELM99431543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431551	-	ELM99431551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431552	-	ELM99431552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431553	-	ELM99431553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431561	-	ELM99431561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431562	-	ELM99431562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431563	-	ELM99431563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431571	-	ELM99431571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431572	-	ELM99431572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431573	-	ELM99431573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431581	-	ELM99431581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431582	-	ELM99431582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431583	-	ELM99431583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431591	-	ELM99431591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431592	-	ELM99431592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431593	-	ELM99431593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99431601	-	ELM99431601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99431602	-	ELM99431602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99431603	-	ELM99431603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99432181	-	ELM99432181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432182	-	ELM99432182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432183	-	ELM99432183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432191	-	ELM99432191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432192	-	ELM99432192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432193	-	ELM99432193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432201	-	ELM99432201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432202	-	ELM99432202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432203	-	ELM99432203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432211	-	ELM99432211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432212	-	ELM99432212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432213	-	ELM99432213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432221	-	ELM99432221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432222	-	ELM99432222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432223	-	ELM99432223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432231	-	ELM99432231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432232	-	ELM99432232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432233	-	ELM99432233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432241	-	ELM99432241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432242	-	ELM99432242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99432243	-	ELM99432243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432251	-	ELM99432251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432252	-	ELM99432252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432253	-	ELM99432253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432261	-	ELM99432261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432262	-	ELM99432262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432263	-	ELM99432263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432271	-	ELM99432271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432272	-	ELM99432272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432273	-	ELM99432273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432281	-	ELM99432281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432282	-	ELM99432282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432283	-	ELM99432283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432291	-	ELM99432291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432292	-	ELM99432292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432293	-	ELM99432293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432301	-	ELM99432301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432302	-	ELM99432302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432303	-	ELM99432303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432311	-	ELM99432311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432312	-	ELM99432312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432313	-	ELM99432313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432321	-	ELM99432321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432322	-	ELM99432322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432323	-	ELM99432323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432331	-	ELM99432331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432332	-	ELM99432332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432333	-	ELM99432333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432341	-	ELM99432341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432342	-	ELM99432342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432343	-	ELM99432343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432351	-	ELM99432351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432352	-	ELM99432352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432353	-	ELM99432353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432361	-	ELM99432361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432362	-	ELM99432362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432363	-	ELM99432363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432371	-	ELM99432371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432372	-	ELM99432372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432373	-	ELM99432373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432381	-	ELM99432381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432382	-	ELM99432382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432383	-	ELM99432383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432391	-	ELM99432391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432392	-	ELM99432392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432393	-	ELM99432393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432401	-	ELM99432401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432402	-	ELM99432402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432403	-	ELM99432403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432411	-	ELM99432411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432412	-	ELM99432412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432413	-	ELM99432413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432421	-	ELM99432421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432422	-	ELM99432422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432423	-	ELM99432423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432431	-	ELM99432431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432432	-	ELM99432432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432433	-	ELM99432433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432441	-	ELM99432441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432442	-	ELM99432442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432443	-	ELM99432443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432451	-	ELM99432451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432452	-	ELM99432452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432453	-	ELM99432453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432461	-	ELM99432461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432462	-	ELM99432462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432463	-	ELM99432463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432471	-	ELM99432471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432472	-	ELM99432472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432473	-	ELM99432473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99432481	-	ELM99432481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432482	-	ELM99432482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432483	-	ELM99432483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432491	-	ELM99432491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432492	-	ELM99432492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432493	-	ELM99432493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432501	-	ELM99432501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432502	-	ELM99432502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432503	-	ELM99432503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432511	-	ELM99432511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432512	-	ELM99432512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432513	-	ELM99432513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432521	-	ELM99432521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432522	-	ELM99432522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432523	-	ELM99432523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432531	-	ELM99432531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432532	-	ELM99432532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432533	-	ELM99432533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432541	-	ELM99432541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432542	-	ELM99432542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432543	-	ELM99432543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432551	-	ELM99432551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432552	-	ELM99432552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432553	-	ELM99432553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432561	-	ELM99432561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432562	-	ELM99432562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432563	-	ELM99432563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432571	-	ELM99432571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432572	-	ELM99432572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432573	-	ELM99432573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432581	-	ELM99432581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432582	-	ELM99432582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432583	-	ELM99432583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432591	-	ELM99432591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432592	-	ELM99432592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432593	-	ELM99432593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99432601	-	ELM99432601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99432602	-	ELM99432602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99432603	-	ELM99432603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433181	-	ELM99433181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433182	-	ELM99433182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433183	-	ELM99433183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433191	-	ELM99433191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433192	-	ELM99433192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433193	-	ELM99433193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433201	-	ELM99433201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433202	-	ELM99433202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433203	-	ELM99433203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433211	-	ELM99433211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433212	-	ELM99433212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433213	-	ELM99433213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433221	-	ELM99433221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433222	-	ELM99433222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433223	-	ELM99433223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433231	-	ELM99433231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433232	-	ELM99433232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433233	-	ELM99433233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433241	-	ELM99433241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433242	-	ELM99433242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433243	-	ELM99433243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433251	-	ELM99433251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433252	-	ELM99433252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433253	-	ELM99433253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433261	-	ELM99433261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433262	-	ELM99433262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433263	-	ELM99433263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433271	-	ELM99433271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433272	-	ELM99433272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433273	-	ELM99433273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433281	-	ELM99433281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99433282	-	ELM99433282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433283	-	ELM99433283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433291	-	ELM99433291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433292	-	ELM99433292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433293	-	ELM99433293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433301	-	ELM99433301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433302	-	ELM99433302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433303	-	ELM99433303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433311	-	ELM99433311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433312	-	ELM99433312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433313	-	ELM99433313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433321	-	ELM99433321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433322	-	ELM99433322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433323	-	ELM99433323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433331	-	ELM99433331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433332	-	ELM99433332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433333	-	ELM99433333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433341	-	ELM99433341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433342	-	ELM99433342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433343	-	ELM99433343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433351	-	ELM99433351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433352	-	ELM99433352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433353	-	ELM99433353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433361	-	ELM99433361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433362	-	ELM99433362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433363	-	ELM99433363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433371	-	ELM99433371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433372	-	ELM99433372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433373	-	ELM99433373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433381	-	ELM99433381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433382	-	ELM99433382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433383	-	ELM99433383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433391	-	ELM99433391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433392	-	ELM99433392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433393	-	ELM99433393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433401	-	ELM99433401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433402	-	ELM99433402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433403	-	ELM99433403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433411	-	ELM99433411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433412	-	ELM99433412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433413	-	ELM99433413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433421	-	ELM99433421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433422	-	ELM99433422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433423	-	ELM99433423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433431	-	ELM99433431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433432	-	ELM99433432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433433	-	ELM99433433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433441	-	ELM99433441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433442	-	ELM99433442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433443	-	ELM99433443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433451	-	ELM99433451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433452	-	ELM99433452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433453	-	ELM99433453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433461	-	ELM99433461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433462	-	ELM99433462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433463	-	ELM99433463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433471	-	ELM99433471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433472	-	ELM99433472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433473	-	ELM99433473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433481	-	ELM99433481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433482	-	ELM99433482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433483	-	ELM99433483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433491	-	ELM99433491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433492	-	ELM99433492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433493	-	ELM99433493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433501	-	ELM99433501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433502	-	ELM99433502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433503	-	ELM99433503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433511	-	ELM99433511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433512	-	ELM99433512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99433513	-	ELM99433513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433521	-	ELM99433521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433522	-	ELM99433522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433523	-	ELM99433523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433531	-	ELM99433531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433532	-	ELM99433532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433533	-	ELM99433533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433541	-	ELM99433541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433542	-	ELM99433542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433543	-	ELM99433543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433551	-	ELM99433551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433552	-	ELM99433552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433553	-	ELM99433553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433561	-	ELM99433561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433562	-	ELM99433562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433563	-	ELM99433563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433571	-	ELM99433571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433572	-	ELM99433572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433573	-	ELM99433573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433581	-	ELM99433581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433582	-	ELM99433582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433583	-	ELM99433583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433591	-	ELM99433591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433592	-	ELM99433592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433593	-	ELM99433593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99433601	-	ELM99433601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99433602	-	ELM99433602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99433603	-	ELM99433603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99441181	-	ELM99441181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441182	-	ELM99441182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441183	-	ELM99441183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441191	-	ELM99441191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441192	-	ELM99441192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441193	-	ELM99441193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441201	-	ELM99441201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441202	-	ELM99441202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441203	-	ELM99441203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441211	-	ELM99441211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441212	-	ELM99441212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441213	-	ELM99441213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441221	-	ELM99441221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441222	-	ELM99441222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441223	-	ELM99441223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441231	-	ELM99441231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441232	-	ELM99441232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441233	-	ELM99441233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441241	-	ELM99441241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441242	-	ELM99441242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441243	-	ELM99441243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441251	-	ELM99441251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441252	-	ELM99441252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441253	-	ELM99441253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441261	-	ELM99441261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441262	-	ELM99441262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441263	-	ELM99441263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441271	-	ELM99441271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441272	-	ELM99441272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441273	-	ELM99441273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441281	-	ELM99441281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441282	-	ELM99441282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441283	-	ELM99441283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441291	-	ELM99441291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441292	-	ELM99441292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441293	-	ELM99441293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441301	-	ELM99441301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441302	-	ELM99441302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441303	-	ELM99441303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441311	-	ELM99441311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441312	-	ELM99441312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441313	-	ELM99441313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99441321	-	ELM99441321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441322	-	ELM99441322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441323	-	ELM99441323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441331	-	ELM99441331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441332	-	ELM99441332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441333	-	ELM99441333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441341	-	ELM99441341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441342	-	ELM99441342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441343	-	ELM99441343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441351	-	ELM99441351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441352	-	ELM99441352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441353	-	ELM99441353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441361	-	ELM99441361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441362	-	ELM99441362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441363	-	ELM99441363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441371	-	ELM99441371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441372	-	ELM99441372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441373	-	ELM99441373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441381	-	ELM99441381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441382	-	ELM99441382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441383	-	ELM99441383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441391	-	ELM99441391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441392	-	ELM99441392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441393	-	ELM99441393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441401	-	ELM99441401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441402	-	ELM99441402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441403	-	ELM99441403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441411	-	ELM99441411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441412	-	ELM99441412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441413	-	ELM99441413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441421	-	ELM99441421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441422	-	ELM99441422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441423	-	ELM99441423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441431	-	ELM99441431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441432	-	ELM99441432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441433	-	ELM99441433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441441	-	ELM99441441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441442	-	ELM99441442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441443	-	ELM99441443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441451	-	ELM99441451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441452	-	ELM99441452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441453	-	ELM99441453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441461	-	ELM99441461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441462	-	ELM99441462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441463	-	ELM99441463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441471	-	ELM99441471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441472	-	ELM99441472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441473	-	ELM99441473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441481	-	ELM99441481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441482	-	ELM99441482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441483	-	ELM99441483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441491	-	ELM99441491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441492	-	ELM99441492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441493	-	ELM99441493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441501	-	ELM99441501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441502	-	ELM99441502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441503	-	ELM99441503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441511	-	ELM99441511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441512	-	ELM99441512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441513	-	ELM99441513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441521	-	ELM99441521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441522	-	ELM99441522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441523	-	ELM99441523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441531	-	ELM99441531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441532	-	ELM99441532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441533	-	ELM99441533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441541	-	ELM99441541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441542	-	ELM99441542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441543	-	ELM99441543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441551	-	ELM99441551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99441552	-	ELM99441552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441553	-	ELM99441553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441561	-	ELM99441561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441562	-	ELM99441562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441563	-	ELM99441563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441571	-	ELM99441571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441572	-	ELM99441572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441573	-	ELM99441573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441581	-	ELM99441581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441582	-	ELM99441582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441583	-	ELM99441583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441591	-	ELM99441591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441592	-	ELM99441592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441593	-	ELM99441593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99441601	-	ELM99441601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99441602	-	ELM99441602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99441603	-	ELM99441603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99442181	-	ELM99442181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442182	-	ELM99442182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442183	-	ELM99442183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442191	-	ELM99442191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442192	-	ELM99442192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442193	-	ELM99442193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442201	-	ELM99442201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442202	-	ELM99442202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442203	-	ELM99442203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442211	-	ELM99442211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442212	-	ELM99442212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442213	-	ELM99442213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442221	-	ELM99442221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442222	-	ELM99442222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442223	-	ELM99442223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442231	-	ELM99442231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442232	-	ELM99442232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442233	-	ELM99442233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442241	-	ELM99442241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442242	-	ELM99442242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442243	-	ELM99442243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442251	-	ELM99442251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442252	-	ELM99442252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442253	-	ELM99442253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442261	-	ELM99442261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442262	-	ELM99442262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442263	-	ELM99442263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442271	-	ELM99442271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442272	-	ELM99442272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442273	-	ELM99442273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442281	-	ELM99442281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442282	-	ELM99442282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442283	-	ELM99442283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442291	-	ELM99442291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442292	-	ELM99442292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442293	-	ELM99442293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442301	-	ELM99442301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442302	-	ELM99442302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442303	-	ELM99442303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442311	-	ELM99442311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442312	-	ELM99442312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442313	-	ELM99442313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442321	-	ELM99442321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442322	-	ELM99442322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442323	-	ELM99442323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442331	-	ELM99442331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442332	-	ELM99442332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442333	-	ELM99442333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442341	-	ELM99442341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442342	-	ELM99442342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442343	-	ELM99442343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442351	-	ELM99442351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442352	-	ELM99442352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99442353	-	ELM99442353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442361	-	ELM99442361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442362	-	ELM99442362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442363	-	ELM99442363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442371	-	ELM99442371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442372	-	ELM99442372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442373	-	ELM99442373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442381	-	ELM99442381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442382	-	ELM99442382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442383	-	ELM99442383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442391	-	ELM99442391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442392	-	ELM99442392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442393	-	ELM99442393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442401	-	ELM99442401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442402	-	ELM99442402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442403	-	ELM99442403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442411	-	ELM99442411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442412	-	ELM99442412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442413	-	ELM99442413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442421	-	ELM99442421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442422	-	ELM99442422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442423	-	ELM99442423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442431	-	ELM99442431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442432	-	ELM99442432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442433	-	ELM99442433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442441	-	ELM99442441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442442	-	ELM99442442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442443	-	ELM99442443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442451	-	ELM99442451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442452	-	ELM99442452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442453	-	ELM99442453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442461	-	ELM99442461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442462	-	ELM99442462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442463	-	ELM99442463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442471	-	ELM99442471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442472	-	ELM99442472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442473	-	ELM99442473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442481	-	ELM99442481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442482	-	ELM99442482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442483	-	ELM99442483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442491	-	ELM99442491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442492	-	ELM99442492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442493	-	ELM99442493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442501	-	ELM99442501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442502	-	ELM99442502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442503	-	ELM99442503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442511	-	ELM99442511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442512	-	ELM99442512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442513	-	ELM99442513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442521	-	ELM99442521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442522	-	ELM99442522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442523	-	ELM99442523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442531	-	ELM99442531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442532	-	ELM99442532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442533	-	ELM99442533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442541	-	ELM99442541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442542	-	ELM99442542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442543	-	ELM99442543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442551	-	ELM99442551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442552	-	ELM99442552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442553	-	ELM99442553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442561	-	ELM99442561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442562	-	ELM99442562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442563	-	ELM99442563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442571	-	ELM99442571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442572	-	ELM99442572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442573	-	ELM99442573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442581	-	ELM99442581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442582	-	ELM99442582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442583	-	ELM99442583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99442591	-	ELM99442591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442592	-	ELM99442592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442593	-	ELM99442593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99442601	-	ELM99442601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99442602	-	ELM99442602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99442603	-	ELM99442603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443181	-	ELM99443181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443182	-	ELM99443182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443183	-	ELM99443183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443191	-	ELM99443191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443192	-	ELM99443192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443193	-	ELM99443193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443201	-	ELM99443201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443202	-	ELM99443202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443203	-	ELM99443203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443211	-	ELM99443211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443212	-	ELM99443212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443213	-	ELM99443213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443221	-	ELM99443221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443222	-	ELM99443222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443223	-	ELM99443223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443231	-	ELM99443231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443232	-	ELM99443232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443233	-	ELM99443233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443241	-	ELM99443241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443242	-	ELM99443242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443243	-	ELM99443243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443251	-	ELM99443251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443252	-	ELM99443252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443253	-	ELM99443253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443261	-	ELM99443261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443262	-	ELM99443262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443263	-	ELM99443263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443271	-	ELM99443271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443272	-	ELM99443272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443273	-	ELM99443273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443281	-	ELM99443281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443282	-	ELM99443282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443283	-	ELM99443283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443291	-	ELM99443291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443292	-	ELM99443292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443293	-	ELM99443293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443301	-	ELM99443301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443302	-	ELM99443302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443303	-	ELM99443303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443311	-	ELM99443311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443312	-	ELM99443312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443313	-	ELM99443313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443321	-	ELM99443321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443322	-	ELM99443322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443323	-	ELM99443323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443331	-	ELM99443331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443332	-	ELM99443332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443333	-	ELM99443333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443341	-	ELM99443341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443342	-	ELM99443342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443343	-	ELM99443343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443351	-	ELM99443351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443352	-	ELM99443352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443353	-	ELM99443353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443361	-	ELM99443361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443362	-	ELM99443362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443363	-	ELM99443363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443371	-	ELM99443371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443372	-	ELM99443372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443373	-	ELM99443373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443381	-	ELM99443381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443382	-	ELM99443382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443383	-	ELM99443383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443391	-	ELM99443391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99443392	-	ELM99443392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443393	-	ELM99443393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443401	-	ELM99443401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443402	-	ELM99443402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443403	-	ELM99443403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443411	-	ELM99443411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443412	-	ELM99443412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443413	-	ELM99443413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443421	-	ELM99443421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443422	-	ELM99443422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443423	-	ELM99443423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443431	-	ELM99443431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443432	-	ELM99443432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443433	-	ELM99443433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443441	-	ELM99443441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443442	-	ELM99443442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443443	-	ELM99443443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443451	-	ELM99443451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443452	-	ELM99443452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443453	-	ELM99443453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443461	-	ELM99443461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443462	-	ELM99443462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443463	-	ELM99443463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443471	-	ELM99443471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443472	-	ELM99443472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443473	-	ELM99443473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443481	-	ELM99443481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443482	-	ELM99443482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443483	-	ELM99443483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443491	-	ELM99443491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443492	-	ELM99443492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443493	-	ELM99443493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443501	-	ELM99443501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443502	-	ELM99443502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443503	-	ELM99443503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443511	-	ELM99443511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443512	-	ELM99443512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443513	-	ELM99443513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443521	-	ELM99443521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443522	-	ELM99443522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443523	-	ELM99443523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443531	-	ELM99443531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443532	-	ELM99443532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443533	-	ELM99443533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443541	-	ELM99443541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443542	-	ELM99443542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443543	-	ELM99443543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443551	-	ELM99443551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443552	-	ELM99443552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443553	-	ELM99443553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443561	-	ELM99443561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443562	-	ELM99443562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443563	-	ELM99443563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443571	-	ELM99443571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443572	-	ELM99443572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443573	-	ELM99443573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443581	-	ELM99443581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443582	-	ELM99443582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443583	-	ELM99443583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443591	-	ELM99443591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443592	-	ELM99443592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443593	-	ELM99443593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99443601	-	ELM99443601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99443602	-	ELM99443602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99443603	-	ELM99443603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99451181	-	ELM99451181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451182	-	ELM99451182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451183	-	ELM99451183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451191	-	ELM99451191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451192	-	ELM99451192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99451193	-	ELM99451193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451201	-	ELM99451201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451202	-	ELM99451202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451203	-	ELM99451203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451211	-	ELM99451211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451212	-	ELM99451212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451213	-	ELM99451213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451221	-	ELM99451221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451222	-	ELM99451222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451223	-	ELM99451223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451231	-	ELM99451231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451232	-	ELM99451232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451233	-	ELM99451233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451241	-	ELM99451241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451242	-	ELM99451242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451243	-	ELM99451243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451251	-	ELM99451251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451252	-	ELM99451252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451253	-	ELM99451253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451261	-	ELM99451261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451262	-	ELM99451262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451263	-	ELM99451263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451271	-	ELM99451271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451272	-	ELM99451272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451273	-	ELM99451273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451281	-	ELM99451281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451282	-	ELM99451282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451283	-	ELM99451283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451291	-	ELM99451291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451292	-	ELM99451292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451293	-	ELM99451293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451301	-	ELM99451301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451302	-	ELM99451302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451303	-	ELM99451303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451311	-	ELM99451311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451312	-	ELM99451312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451313	-	ELM99451313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451321	-	ELM99451321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451322	-	ELM99451322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451323	-	ELM99451323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451331	-	ELM99451331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451332	-	ELM99451332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451333	-	ELM99451333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451341	-	ELM99451341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451342	-	ELM99451342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451343	-	ELM99451343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451351	-	ELM99451351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451352	-	ELM99451352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451353	-	ELM99451353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451361	-	ELM99451361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451362	-	ELM99451362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451363	-	ELM99451363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451371	-	ELM99451371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451372	-	ELM99451372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451373	-	ELM99451373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451381	-	ELM99451381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451382	-	ELM99451382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451383	-	ELM99451383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451391	-	ELM99451391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451392	-	ELM99451392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451393	-	ELM99451393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451401	-	ELM99451401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451402	-	ELM99451402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451403	-	ELM99451403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451411	-	ELM99451411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451412	-	ELM99451412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451413	-	ELM99451413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451421	-	ELM99451421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451422	-	ELM99451422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451423	-	ELM99451423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99451431	-	ELM99451431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451432	-	ELM99451432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451433	-	ELM99451433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451441	-	ELM99451441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451442	-	ELM99451442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451443	-	ELM99451443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451451	-	ELM99451451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451452	-	ELM99451452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451453	-	ELM99451453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451461	-	ELM99451461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451462	-	ELM99451462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451463	-	ELM99451463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451471	-	ELM99451471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451472	-	ELM99451472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451473	-	ELM99451473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451481	-	ELM99451481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451482	-	ELM99451482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451483	-	ELM99451483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451491	-	ELM99451491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451492	-	ELM99451492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451493	-	ELM99451493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451501	-	ELM99451501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451502	-	ELM99451502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451503	-	ELM99451503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451511	-	ELM99451511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451512	-	ELM99451512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451513	-	ELM99451513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451521	-	ELM99451521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451522	-	ELM99451522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451523	-	ELM99451523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451531	-	ELM99451531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451532	-	ELM99451532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451533	-	ELM99451533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451541	-	ELM99451541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451542	-	ELM99451542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451543	-	ELM99451543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451551	-	ELM99451551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451552	-	ELM99451552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451553	-	ELM99451553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451561	-	ELM99451561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451562	-	ELM99451562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451563	-	ELM99451563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451571	-	ELM99451571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451572	-	ELM99451572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451573	-	ELM99451573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451581	-	ELM99451581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451582	-	ELM99451582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451583	-	ELM99451583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451591	-	ELM99451591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451592	-	ELM99451592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451593	-	ELM99451593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99451601	-	ELM99451601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99451602	-	ELM99451602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99451603	-	ELM99451603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99452181	-	ELM99452181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452182	-	ELM99452182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452183	-	ELM99452183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452191	-	ELM99452191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452192	-	ELM99452192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452193	-	ELM99452193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452201	-	ELM99452201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452202	-	ELM99452202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452203	-	ELM99452203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452211	-	ELM99452211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452212	-	ELM99452212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452213	-	ELM99452213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452221	-	ELM99452221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452222	-	ELM99452222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452223	-	ELM99452223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452231	-	ELM99452231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99452232	-	ELM99452232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452233	-	ELM99452233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452241	-	ELM99452241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452242	-	ELM99452242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452243	-	ELM99452243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452251	-	ELM99452251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452252	-	ELM99452252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452253	-	ELM99452253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452261	-	ELM99452261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452262	-	ELM99452262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452263	-	ELM99452263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452271	-	ELM99452271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452272	-	ELM99452272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452273	-	ELM99452273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452281	-	ELM99452281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452282	-	ELM99452282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452283	-	ELM99452283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452291	-	ELM99452291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452292	-	ELM99452292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452293	-	ELM99452293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452301	-	ELM99452301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452302	-	ELM99452302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452303	-	ELM99452303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452311	-	ELM99452311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452312	-	ELM99452312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452313	-	ELM99452313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452321	-	ELM99452321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452322	-	ELM99452322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452323	-	ELM99452323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452331	-	ELM99452331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452332	-	ELM99452332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452333	-	ELM99452333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452341	-	ELM99452341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452342	-	ELM99452342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452343	-	ELM99452343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452351	-	ELM99452351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452352	-	ELM99452352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452353	-	ELM99452353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452361	-	ELM99452361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452362	-	ELM99452362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452363	-	ELM99452363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452371	-	ELM99452371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452372	-	ELM99452372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452373	-	ELM99452373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452381	-	ELM99452381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452382	-	ELM99452382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452383	-	ELM99452383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452391	-	ELM99452391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452392	-	ELM99452392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452393	-	ELM99452393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452401	-	ELM99452401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452402	-	ELM99452402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452403	-	ELM99452403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452411	-	ELM99452411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452412	-	ELM99452412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452413	-	ELM99452413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452421	-	ELM99452421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452422	-	ELM99452422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452423	-	ELM99452423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452431	-	ELM99452431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452432	-	ELM99452432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452433	-	ELM99452433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452441	-	ELM99452441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452442	-	ELM99452442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452443	-	ELM99452443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452451	-	ELM99452451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452452	-	ELM99452452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452453	-	ELM99452453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452461	-	ELM99452461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452462	-	ELM99452462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99452463	-	ELM99452463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452471	-	ELM99452471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452472	-	ELM99452472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452473	-	ELM99452473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452481	-	ELM99452481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452482	-	ELM99452482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452483	-	ELM99452483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452491	-	ELM99452491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452492	-	ELM99452492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452493	-	ELM99452493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452501	-	ELM99452501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452502	-	ELM99452502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452503	-	ELM99452503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452511	-	ELM99452511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452512	-	ELM99452512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452513	-	ELM99452513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452521	-	ELM99452521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452522	-	ELM99452522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452523	-	ELM99452523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452531	-	ELM99452531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452532	-	ELM99452532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452533	-	ELM99452533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452541	-	ELM99452541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452542	-	ELM99452542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452543	-	ELM99452543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452551	-	ELM99452551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452552	-	ELM99452552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452553	-	ELM99452553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452561	-	ELM99452561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452562	-	ELM99452562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452563	-	ELM99452563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452571	-	ELM99452571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452572	-	ELM99452572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452573	-	ELM99452573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452581	-	ELM99452581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452582	-	ELM99452582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452583	-	ELM99452583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452591	-	ELM99452591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452592	-	ELM99452592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452593	-	ELM99452593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99452601	-	ELM99452601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99452602	-	ELM99452602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99452603	-	ELM99452603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453181	-	ELM99453181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453182	-	ELM99453182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453183	-	ELM99453183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453191	-	ELM99453191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453192	-	ELM99453192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453193	-	ELM99453193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453201	-	ELM99453201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453202	-	ELM99453202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453203	-	ELM99453203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453211	-	ELM99453211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453212	-	ELM99453212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453213	-	ELM99453213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453221	-	ELM99453221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453222	-	ELM99453222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453223	-	ELM99453223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453231	-	ELM99453231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453232	-	ELM99453232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453233	-	ELM99453233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453241	-	ELM99453241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453242	-	ELM99453242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453243	-	ELM99453243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453251	-	ELM99453251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453252	-	ELM99453252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453253	-	ELM99453253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453261	-	ELM99453261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453262	-	ELM99453262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453263	-	ELM99453263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99453271	-	ELM99453271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453272	-	ELM99453272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453273	-	ELM99453273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453281	-	ELM99453281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453282	-	ELM99453282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453283	-	ELM99453283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453291	-	ELM99453291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453292	-	ELM99453292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453293	-	ELM99453293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453301	-	ELM99453301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453302	-	ELM99453302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453303	-	ELM99453303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453311	-	ELM99453311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453312	-	ELM99453312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453313	-	ELM99453313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453321	-	ELM99453321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453322	-	ELM99453322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453323	-	ELM99453323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453331	-	ELM99453331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453332	-	ELM99453332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453333	-	ELM99453333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453341	-	ELM99453341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453342	-	ELM99453342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453343	-	ELM99453343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453351	-	ELM99453351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453352	-	ELM99453352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453353	-	ELM99453353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453361	-	ELM99453361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453362	-	ELM99453362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453363	-	ELM99453363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453371	-	ELM99453371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453372	-	ELM99453372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453373	-	ELM99453373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453381	-	ELM99453381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453382	-	ELM99453382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453383	-	ELM99453383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453391	-	ELM99453391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453392	-	ELM99453392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453393	-	ELM99453393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453401	-	ELM99453401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453402	-	ELM99453402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453403	-	ELM99453403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453411	-	ELM99453411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453412	-	ELM99453412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453413	-	ELM99453413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453421	-	ELM99453421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453422	-	ELM99453422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453423	-	ELM99453423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453431	-	ELM99453431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453432	-	ELM99453432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453433	-	ELM99453433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453441	-	ELM99453441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453442	-	ELM99453442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453443	-	ELM99453443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453451	-	ELM99453451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453452	-	ELM99453452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453453	-	ELM99453453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453461	-	ELM99453461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453462	-	ELM99453462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453463	-	ELM99453463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453471	-	ELM99453471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453472	-	ELM99453472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453473	-	ELM99453473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453481	-	ELM99453481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453482	-	ELM99453482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453483	-	ELM99453483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453491	-	ELM99453491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453492	-	ELM99453492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453493	-	ELM99453493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453501	-	ELM99453501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99453502	-	ELM99453502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453503	-	ELM99453503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453511	-	ELM99453511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453512	-	ELM99453512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453513	-	ELM99453513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453521	-	ELM99453521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453522	-	ELM99453522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453523	-	ELM99453523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453531	-	ELM99453531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453532	-	ELM99453532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453533	-	ELM99453533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453541	-	ELM99453541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453542	-	ELM99453542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453543	-	ELM99453543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453551	-	ELM99453551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453552	-	ELM99453552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453553	-	ELM99453553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453561	-	ELM99453561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453562	-	ELM99453562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453563	-	ELM99453563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453571	-	ELM99453571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453572	-	ELM99453572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453573	-	ELM99453573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453581	-	ELM99453581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453582	-	ELM99453582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453583	-	ELM99453583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453591	-	ELM99453591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453592	-	ELM99453592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453593	-	ELM99453593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99453601	-	ELM99453601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99453602	-	ELM99453602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99453603	-	ELM99453603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99461181	-	ELM99461181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461182	-	ELM99461182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461183	-	ELM99461183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461191	-	ELM99461191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461192	-	ELM99461192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461193	-	ELM99461193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461201	-	ELM99461201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461202	-	ELM99461202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461203	-	ELM99461203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461211	-	ELM99461211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461212	-	ELM99461212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461213	-	ELM99461213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461221	-	ELM99461221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461222	-	ELM99461222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461223	-	ELM99461223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461231	-	ELM99461231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461232	-	ELM99461232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461233	-	ELM99461233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461241	-	ELM99461241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461242	-	ELM99461242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461243	-	ELM99461243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461251	-	ELM99461251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461252	-	ELM99461252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461253	-	ELM99461253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461261	-	ELM99461261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461262	-	ELM99461262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461263	-	ELM99461263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461271	-	ELM99461271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461272	-	ELM99461272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461273	-	ELM99461273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461281	-	ELM99461281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461282	-	ELM99461282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461283	-	ELM99461283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461291	-	ELM99461291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461292	-	ELM99461292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461293	-	ELM99461293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461301	-	ELM99461301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461302	-	ELM99461302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99461303	-	ELM99461303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461311	-	ELM99461311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461312	-	ELM99461312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461313	-	ELM99461313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461321	-	ELM99461321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461322	-	ELM99461322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461323	-	ELM99461323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461331	-	ELM99461331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461332	-	ELM99461332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461333	-	ELM99461333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461341	-	ELM99461341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461342	-	ELM99461342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461343	-	ELM99461343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461351	-	ELM99461351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461352	-	ELM99461352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461353	-	ELM99461353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461361	-	ELM99461361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461362	-	ELM99461362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461363	-	ELM99461363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461371	-	ELM99461371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461372	-	ELM99461372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461373	-	ELM99461373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461381	-	ELM99461381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461382	-	ELM99461382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461383	-	ELM99461383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461391	-	ELM99461391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461392	-	ELM99461392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461393	-	ELM99461393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461401	-	ELM99461401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461402	-	ELM99461402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461403	-	ELM99461403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461411	-	ELM99461411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461412	-	ELM99461412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461413	-	ELM99461413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461421	-	ELM99461421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461422	-	ELM99461422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461423	-	ELM99461423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461431	-	ELM99461431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461432	-	ELM99461432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461433	-	ELM99461433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461441	-	ELM99461441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461442	-	ELM99461442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461443	-	ELM99461443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461451	-	ELM99461451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461452	-	ELM99461452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461453	-	ELM99461453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461461	-	ELM99461461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461462	-	ELM99461462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461463	-	ELM99461463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461471	-	ELM99461471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461472	-	ELM99461472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461473	-	ELM99461473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461481	-	ELM99461481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461482	-	ELM99461482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461483	-	ELM99461483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461491	-	ELM99461491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461492	-	ELM99461492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461493	-	ELM99461493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461501	-	ELM99461501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461502	-	ELM99461502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461503	-	ELM99461503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461511	-	ELM99461511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461512	-	ELM99461512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461513	-	ELM99461513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461521	-	ELM99461521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461522	-	ELM99461522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461523	-	ELM99461523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461531	-	ELM99461531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461532	-	ELM99461532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461533	-	ELM99461533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99461541	-	ELM99461541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461542	-	ELM99461542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461543	-	ELM99461543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461551	-	ELM99461551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461552	-	ELM99461552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461553	-	ELM99461553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461561	-	ELM99461561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461562	-	ELM99461562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461563	-	ELM99461563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461571	-	ELM99461571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461572	-	ELM99461572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461573	-	ELM99461573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461581	-	ELM99461581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461582	-	ELM99461582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461583	-	ELM99461583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461591	-	ELM99461591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461592	-	ELM99461592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461593	-	ELM99461593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99461601	-	ELM99461601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99461602	-	ELM99461602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99461603	-	ELM99461603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99462181	-	ELM99462181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462182	-	ELM99462182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462183	-	ELM99462183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462191	-	ELM99462191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462192	-	ELM99462192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462193	-	ELM99462193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462201	-	ELM99462201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462202	-	ELM99462202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462203	-	ELM99462203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462211	-	ELM99462211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462212	-	ELM99462212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462213	-	ELM99462213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462221	-	ELM99462221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462222	-	ELM99462222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462223	-	ELM99462223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462231	-	ELM99462231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462232	-	ELM99462232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462233	-	ELM99462233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462241	-	ELM99462241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462242	-	ELM99462242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462243	-	ELM99462243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462251	-	ELM99462251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462252	-	ELM99462252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462253	-	ELM99462253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462261	-	ELM99462261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462262	-	ELM99462262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462263	-	ELM99462263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462271	-	ELM99462271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462272	-	ELM99462272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462273	-	ELM99462273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462281	-	ELM99462281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462282	-	ELM99462282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462283	-	ELM99462283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462291	-	ELM99462291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462292	-	ELM99462292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462293	-	ELM99462293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462301	-	ELM99462301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462302	-	ELM99462302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462303	-	ELM99462303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462311	-	ELM99462311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462312	-	ELM99462312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462313	-	ELM99462313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462321	-	ELM99462321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462322	-	ELM99462322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462323	-	ELM99462323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462331	-	ELM99462331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462332	-	ELM99462332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462333	-	ELM99462333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462341	-	ELM99462341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99462342	-	ELM99462342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462343	-	ELM99462343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462351	-	ELM99462351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462352	-	ELM99462352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462353	-	ELM99462353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462361	-	ELM99462361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462362	-	ELM99462362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462363	-	ELM99462363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462371	-	ELM99462371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462372	-	ELM99462372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462373	-	ELM99462373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462381	-	ELM99462381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462382	-	ELM99462382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462383	-	ELM99462383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462391	-	ELM99462391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462392	-	ELM99462392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462393	-	ELM99462393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462401	-	ELM99462401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462402	-	ELM99462402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462403	-	ELM99462403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462411	-	ELM99462411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462412	-	ELM99462412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462413	-	ELM99462413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462421	-	ELM99462421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462422	-	ELM99462422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462423	-	ELM99462423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462431	-	ELM99462431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462432	-	ELM99462432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462433	-	ELM99462433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462441	-	ELM99462441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462442	-	ELM99462442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462443	-	ELM99462443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462451	-	ELM99462451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462452	-	ELM99462452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462453	-	ELM99462453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462461	-	ELM99462461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462462	-	ELM99462462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462463	-	ELM99462463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462471	-	ELM99462471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462472	-	ELM99462472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462473	-	ELM99462473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462481	-	ELM99462481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462482	-	ELM99462482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462483	-	ELM99462483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462491	-	ELM99462491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462492	-	ELM99462492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462493	-	ELM99462493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462501	-	ELM99462501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462502	-	ELM99462502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462503	-	ELM99462503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462511	-	ELM99462511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462512	-	ELM99462512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462513	-	ELM99462513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462521	-	ELM99462521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462522	-	ELM99462522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462523	-	ELM99462523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462531	-	ELM99462531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462532	-	ELM99462532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462533	-	ELM99462533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462541	-	ELM99462541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462542	-	ELM99462542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462543	-	ELM99462543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462551	-	ELM99462551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462552	-	ELM99462552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462553	-	ELM99462553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462561	-	ELM99462561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462562	-	ELM99462562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462563	-	ELM99462563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462571	-	ELM99462571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462572	-	ELM99462572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99462573	-	ELM99462573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462581	-	ELM99462581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462582	-	ELM99462582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462583	-	ELM99462583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462591	-	ELM99462591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462592	-	ELM99462592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462593	-	ELM99462593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99462601	-	ELM99462601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99462602	-	ELM99462602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99462603	-	ELM99462603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463181	-	ELM99463181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463182	-	ELM99463182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463183	-	ELM99463183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463191	-	ELM99463191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463192	-	ELM99463192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463193	-	ELM99463193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463201	-	ELM99463201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463202	-	ELM99463202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463203	-	ELM99463203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463211	-	ELM99463211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463212	-	ELM99463212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463213	-	ELM99463213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463221	-	ELM99463221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463222	-	ELM99463222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463223	-	ELM99463223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463231	-	ELM99463231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463232	-	ELM99463232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463233	-	ELM99463233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463241	-	ELM99463241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463242	-	ELM99463242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463243	-	ELM99463243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463251	-	ELM99463251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463252	-	ELM99463252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463253	-	ELM99463253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463261	-	ELM99463261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463262	-	ELM99463262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463263	-	ELM99463263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463271	-	ELM99463271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463272	-	ELM99463272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463273	-	ELM99463273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463281	-	ELM99463281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463282	-	ELM99463282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463283	-	ELM99463283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463291	-	ELM99463291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463292	-	ELM99463292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463293	-	ELM99463293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463301	-	ELM99463301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463302	-	ELM99463302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463303	-	ELM99463303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463311	-	ELM99463311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463312	-	ELM99463312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463313	-	ELM99463313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463321	-	ELM99463321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463322	-	ELM99463322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463323	-	ELM99463323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463331	-	ELM99463331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463332	-	ELM99463332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463333	-	ELM99463333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463341	-	ELM99463341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463342	-	ELM99463342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463343	-	ELM99463343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463351	-	ELM99463351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463352	-	ELM99463352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463353	-	ELM99463353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463361	-	ELM99463361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463362	-	ELM99463362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463363	-	ELM99463363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463371	-	ELM99463371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463372	-	ELM99463372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463373	-	ELM99463373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99463381	-	ELM99463381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463382	-	ELM99463382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463383	-	ELM99463383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463391	-	ELM99463391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463392	-	ELM99463392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463393	-	ELM99463393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463401	-	ELM99463401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463402	-	ELM99463402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463403	-	ELM99463403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463411	-	ELM99463411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463412	-	ELM99463412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463413	-	ELM99463413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463421	-	ELM99463421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463422	-	ELM99463422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463423	-	ELM99463423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463431	-	ELM99463431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463432	-	ELM99463432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463433	-	ELM99463433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463441	-	ELM99463441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463442	-	ELM99463442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463443	-	ELM99463443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463451	-	ELM99463451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463452	-	ELM99463452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463453	-	ELM99463453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463461	-	ELM99463461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463462	-	ELM99463462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463463	-	ELM99463463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463471	-	ELM99463471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463472	-	ELM99463472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463473	-	ELM99463473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463481	-	ELM99463481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463482	-	ELM99463482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463483	-	ELM99463483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463491	-	ELM99463491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463492	-	ELM99463492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463493	-	ELM99463493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463501	-	ELM99463501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463502	-	ELM99463502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463503	-	ELM99463503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463511	-	ELM99463511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463512	-	ELM99463512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463513	-	ELM99463513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463521	-	ELM99463521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463522	-	ELM99463522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463523	-	ELM99463523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463531	-	ELM99463531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463532	-	ELM99463532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463533	-	ELM99463533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463541	-	ELM99463541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463542	-	ELM99463542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463543	-	ELM99463543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463551	-	ELM99463551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463552	-	ELM99463552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463553	-	ELM99463553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463561	-	ELM99463561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463562	-	ELM99463562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463563	-	ELM99463563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463571	-	ELM99463571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463572	-	ELM99463572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463573	-	ELM99463573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463581	-	ELM99463581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463582	-	ELM99463582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463583	-	ELM99463583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463591	-	ELM99463591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463592	-	ELM99463592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463593	-	ELM99463593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99463601	-	ELM99463601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99463602	-	ELM99463602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99463603	-	ELM99463603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99471181	-	ELM99471181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99471182	-	ELM99471182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471183	-	ELM99471183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471191	-	ELM99471191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471192	-	ELM99471192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471193	-	ELM99471193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471201	-	ELM99471201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471202	-	ELM99471202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471203	-	ELM99471203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471211	-	ELM99471211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471212	-	ELM99471212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471213	-	ELM99471213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471221	-	ELM99471221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471222	-	ELM99471222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471223	-	ELM99471223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471231	-	ELM99471231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471232	-	ELM99471232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471233	-	ELM99471233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471241	-	ELM99471241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471242	-	ELM99471242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471243	-	ELM99471243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471251	-	ELM99471251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471252	-	ELM99471252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471253	-	ELM99471253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471261	-	ELM99471261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471262	-	ELM99471262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471263	-	ELM99471263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471271	-	ELM99471271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471272	-	ELM99471272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471273	-	ELM99471273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471281	-	ELM99471281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471282	-	ELM99471282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471283	-	ELM99471283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471291	-	ELM99471291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471292	-	ELM99471292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471293	-	ELM99471293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471301	-	ELM99471301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471302	-	ELM99471302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471303	-	ELM99471303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471311	-	ELM99471311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471312	-	ELM99471312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471313	-	ELM99471313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471321	-	ELM99471321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471322	-	ELM99471322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471323	-	ELM99471323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471331	-	ELM99471331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471332	-	ELM99471332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471333	-	ELM99471333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471341	-	ELM99471341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471342	-	ELM99471342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471343	-	ELM99471343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471351	-	ELM99471351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471352	-	ELM99471352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471353	-	ELM99471353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471361	-	ELM99471361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471362	-	ELM99471362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471363	-	ELM99471363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471371	-	ELM99471371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471372	-	ELM99471372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471373	-	ELM99471373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471381	-	ELM99471381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471382	-	ELM99471382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471383	-	ELM99471383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471391	-	ELM99471391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471392	-	ELM99471392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471393	-	ELM99471393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471401	-	ELM99471401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471402	-	ELM99471402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471403	-	ELM99471403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471411	-	ELM99471411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471412	-	ELM99471412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99471413	-	ELM99471413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471421	-	ELM99471421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471422	-	ELM99471422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471423	-	ELM99471423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471431	-	ELM99471431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471432	-	ELM99471432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471433	-	ELM99471433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471441	-	ELM99471441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471442	-	ELM99471442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471443	-	ELM99471443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471451	-	ELM99471451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471452	-	ELM99471452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471453	-	ELM99471453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471461	-	ELM99471461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471462	-	ELM99471462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471463	-	ELM99471463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471471	-	ELM99471471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471472	-	ELM99471472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471473	-	ELM99471473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471481	-	ELM99471481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471482	-	ELM99471482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471483	-	ELM99471483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471491	-	ELM99471491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471492	-	ELM99471492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471493	-	ELM99471493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471501	-	ELM99471501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471502	-	ELM99471502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471503	-	ELM99471503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471511	-	ELM99471511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471512	-	ELM99471512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471513	-	ELM99471513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471521	-	ELM99471521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471522	-	ELM99471522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471523	-	ELM99471523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471531	-	ELM99471531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471532	-	ELM99471532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471533	-	ELM99471533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471541	-	ELM99471541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471542	-	ELM99471542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471543	-	ELM99471543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471551	-	ELM99471551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471552	-	ELM99471552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471553	-	ELM99471553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471561	-	ELM99471561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471562	-	ELM99471562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471563	-	ELM99471563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471571	-	ELM99471571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471572	-	ELM99471572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471573	-	ELM99471573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471581	-	ELM99471581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471582	-	ELM99471582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471583	-	ELM99471583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471591	-	ELM99471591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471592	-	ELM99471592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471593	-	ELM99471593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99471601	-	ELM99471601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99471602	-	ELM99471602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99471603	-	ELM99471603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99472181	-	ELM99472181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472182	-	ELM99472182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472183	-	ELM99472183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472191	-	ELM99472191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472192	-	ELM99472192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472193	-	ELM99472193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472201	-	ELM99472201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472202	-	ELM99472202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472203	-	ELM99472203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472211	-	ELM99472211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472212	-	ELM99472212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472213	-	ELM99472213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99472221	-	ELM99472221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472222	-	ELM99472222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472223	-	ELM99472223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472231	-	ELM99472231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472232	-	ELM99472232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472233	-	ELM99472233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472241	-	ELM99472241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472242	-	ELM99472242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472243	-	ELM99472243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472251	-	ELM99472251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472252	-	ELM99472252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472253	-	ELM99472253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472261	-	ELM99472261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472262	-	ELM99472262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472263	-	ELM99472263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472271	-	ELM99472271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472272	-	ELM99472272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472273	-	ELM99472273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472281	-	ELM99472281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472282	-	ELM99472282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472283	-	ELM99472283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472291	-	ELM99472291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472292	-	ELM99472292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472293	-	ELM99472293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472301	-	ELM99472301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472302	-	ELM99472302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472303	-	ELM99472303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472311	-	ELM99472311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472312	-	ELM99472312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472313	-	ELM99472313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472321	-	ELM99472321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472322	-	ELM99472322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472323	-	ELM99472323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472331	-	ELM99472331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472332	-	ELM99472332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472333	-	ELM99472333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472341	-	ELM99472341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472342	-	ELM99472342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472343	-	ELM99472343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472351	-	ELM99472351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472352	-	ELM99472352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472353	-	ELM99472353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472361	-	ELM99472361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472362	-	ELM99472362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472363	-	ELM99472363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472371	-	ELM99472371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472372	-	ELM99472372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472373	-	ELM99472373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472381	-	ELM99472381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472382	-	ELM99472382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472383	-	ELM99472383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472391	-	ELM99472391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472392	-	ELM99472392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472393	-	ELM99472393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472401	-	ELM99472401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472402	-	ELM99472402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472403	-	ELM99472403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472411	-	ELM99472411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472412	-	ELM99472412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472413	-	ELM99472413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472421	-	ELM99472421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472422	-	ELM99472422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472423	-	ELM99472423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472431	-	ELM99472431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472432	-	ELM99472432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472433	-	ELM99472433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472441	-	ELM99472441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472442	-	ELM99472442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472443	-	ELM99472443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472451	-	ELM99472451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99472452	-	ELM99472452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472453	-	ELM99472453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472461	-	ELM99472461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472462	-	ELM99472462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472463	-	ELM99472463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472471	-	ELM99472471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472472	-	ELM99472472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472473	-	ELM99472473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472481	-	ELM99472481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472482	-	ELM99472482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472483	-	ELM99472483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472491	-	ELM99472491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472492	-	ELM99472492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472493	-	ELM99472493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472501	-	ELM99472501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472502	-	ELM99472502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472503	-	ELM99472503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472511	-	ELM99472511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472512	-	ELM99472512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472513	-	ELM99472513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472521	-	ELM99472521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472522	-	ELM99472522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472523	-	ELM99472523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472531	-	ELM99472531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472532	-	ELM99472532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472533	-	ELM99472533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472541	-	ELM99472541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472542	-	ELM99472542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472543	-	ELM99472543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472551	-	ELM99472551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472552	-	ELM99472552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472553	-	ELM99472553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472561	-	ELM99472561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472562	-	ELM99472562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472563	-	ELM99472563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472571	-	ELM99472571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472572	-	ELM99472572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472573	-	ELM99472573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472581	-	ELM99472581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472582	-	ELM99472582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472583	-	ELM99472583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472591	-	ELM99472591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472592	-	ELM99472592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472593	-	ELM99472593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99472601	-	ELM99472601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99472602	-	ELM99472602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99472603	-	ELM99472603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473181	-	ELM99473181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473182	-	ELM99473182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473183	-	ELM99473183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473191	-	ELM99473191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473192	-	ELM99473192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473193	-	ELM99473193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473201	-	ELM99473201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473202	-	ELM99473202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473203	-	ELM99473203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473211	-	ELM99473211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473212	-	ELM99473212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473213	-	ELM99473213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473221	-	ELM99473221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473222	-	ELM99473222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473223	-	ELM99473223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473231	-	ELM99473231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473232	-	ELM99473232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473233	-	ELM99473233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473241	-	ELM99473241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473242	-	ELM99473242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473243	-	ELM99473243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473251	-	ELM99473251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473252	-	ELM99473252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99473253	-	ELM99473253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473261	-	ELM99473261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473262	-	ELM99473262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473263	-	ELM99473263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473271	-	ELM99473271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473272	-	ELM99473272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473273	-	ELM99473273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473281	-	ELM99473281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473282	-	ELM99473282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473283	-	ELM99473283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473291	-	ELM99473291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473292	-	ELM99473292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473293	-	ELM99473293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473301	-	ELM99473301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473302	-	ELM99473302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473303	-	ELM99473303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473311	-	ELM99473311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473312	-	ELM99473312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473313	-	ELM99473313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473321	-	ELM99473321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473322	-	ELM99473322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473323	-	ELM99473323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473331	-	ELM99473331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473332	-	ELM99473332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473333	-	ELM99473333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473341	-	ELM99473341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473342	-	ELM99473342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473343	-	ELM99473343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473351	-	ELM99473351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473352	-	ELM99473352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473353	-	ELM99473353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473361	-	ELM99473361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473362	-	ELM99473362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473363	-	ELM99473363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473371	-	ELM99473371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473372	-	ELM99473372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473373	-	ELM99473373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473381	-	ELM99473381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473382	-	ELM99473382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473383	-	ELM99473383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473391	-	ELM99473391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473392	-	ELM99473392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473393	-	ELM99473393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473401	-	ELM99473401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473402	-	ELM99473402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473403	-	ELM99473403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473411	-	ELM99473411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473412	-	ELM99473412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473413	-	ELM99473413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473421	-	ELM99473421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473422	-	ELM99473422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473423	-	ELM99473423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473431	-	ELM99473431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473432	-	ELM99473432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473433	-	ELM99473433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473441	-	ELM99473441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473442	-	ELM99473442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473443	-	ELM99473443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473451	-	ELM99473451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473452	-	ELM99473452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473453	-	ELM99473453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473461	-	ELM99473461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473462	-	ELM99473462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473463	-	ELM99473463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473471	-	ELM99473471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473472	-	ELM99473472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473473	-	ELM99473473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473481	-	ELM99473481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473482	-	ELM99473482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473483	-	ELM99473483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99473491	-	ELM99473491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473492	-	ELM99473492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473493	-	ELM99473493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473501	-	ELM99473501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473502	-	ELM99473502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473503	-	ELM99473503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473511	-	ELM99473511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473512	-	ELM99473512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473513	-	ELM99473513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473521	-	ELM99473521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473522	-	ELM99473522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473523	-	ELM99473523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473531	-	ELM99473531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473532	-	ELM99473532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473533	-	ELM99473533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473541	-	ELM99473541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473542	-	ELM99473542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473543	-	ELM99473543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473551	-	ELM99473551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473552	-	ELM99473552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473553	-	ELM99473553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473561	-	ELM99473561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473562	-	ELM99473562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473563	-	ELM99473563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473571	-	ELM99473571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473572	-	ELM99473572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473573	-	ELM99473573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473581	-	ELM99473581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473582	-	ELM99473582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473583	-	ELM99473583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473591	-	ELM99473591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473592	-	ELM99473592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473593	-	ELM99473593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99473601	-	ELM99473601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99473602	-	ELM99473602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99473603	-	ELM99473603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99481181	-	ELM99481181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481182	-	ELM99481182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481183	-	ELM99481183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481191	-	ELM99481191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481192	-	ELM99481192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481193	-	ELM99481193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481201	-	ELM99481201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481202	-	ELM99481202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481203	-	ELM99481203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481211	-	ELM99481211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481212	-	ELM99481212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481213	-	ELM99481213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481221	-	ELM99481221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481222	-	ELM99481222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481223	-	ELM99481223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481231	-	ELM99481231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481232	-	ELM99481232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481233	-	ELM99481233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481241	-	ELM99481241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481242	-	ELM99481242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481243	-	ELM99481243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481251	-	ELM99481251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481252	-	ELM99481252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481253	-	ELM99481253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481261	-	ELM99481261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481262	-	ELM99481262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481263	-	ELM99481263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481271	-	ELM99481271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481272	-	ELM99481272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481273	-	ELM99481273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481281	-	ELM99481281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481282	-	ELM99481282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481283	-	ELM99481283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481291	-	ELM99481291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99481292	-	ELM99481292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481293	-	ELM99481293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481301	-	ELM99481301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481302	-	ELM99481302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481303	-	ELM99481303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481311	-	ELM99481311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481312	-	ELM99481312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481313	-	ELM99481313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481321	-	ELM99481321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481322	-	ELM99481322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481323	-	ELM99481323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481331	-	ELM99481331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481332	-	ELM99481332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481333	-	ELM99481333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481341	-	ELM99481341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481342	-	ELM99481342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481343	-	ELM99481343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481351	-	ELM99481351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481352	-	ELM99481352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481353	-	ELM99481353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481361	-	ELM99481361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481362	-	ELM99481362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481363	-	ELM99481363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481371	-	ELM99481371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481372	-	ELM99481372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481373	-	ELM99481373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481381	-	ELM99481381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481382	-	ELM99481382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481383	-	ELM99481383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481391	-	ELM99481391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481392	-	ELM99481392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481393	-	ELM99481393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481401	-	ELM99481401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481402	-	ELM99481402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481403	-	ELM99481403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481411	-	ELM99481411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481412	-	ELM99481412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481413	-	ELM99481413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481421	-	ELM99481421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481422	-	ELM99481422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481423	-	ELM99481423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481431	-	ELM99481431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481432	-	ELM99481432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481433	-	ELM99481433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481441	-	ELM99481441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481442	-	ELM99481442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481443	-	ELM99481443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481451	-	ELM99481451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481452	-	ELM99481452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481453	-	ELM99481453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481461	-	ELM99481461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481462	-	ELM99481462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481463	-	ELM99481463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481471	-	ELM99481471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481472	-	ELM99481472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481473	-	ELM99481473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481481	-	ELM99481481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481482	-	ELM99481482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481483	-	ELM99481483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481491	-	ELM99481491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481492	-	ELM99481492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481493	-	ELM99481493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481501	-	ELM99481501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481502	-	ELM99481502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481503	-	ELM99481503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481511	-	ELM99481511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481512	-	ELM99481512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481513	-	ELM99481513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481521	-	ELM99481521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481522	-	ELM99481522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99481523	-	ELM99481523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481531	-	ELM99481531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481532	-	ELM99481532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481533	-	ELM99481533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481541	-	ELM99481541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481542	-	ELM99481542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481543	-	ELM99481543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481551	-	ELM99481551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481552	-	ELM99481552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481553	-	ELM99481553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481561	-	ELM99481561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481562	-	ELM99481562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481563	-	ELM99481563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481571	-	ELM99481571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481572	-	ELM99481572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481573	-	ELM99481573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481581	-	ELM99481581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481582	-	ELM99481582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481583	-	ELM99481583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481591	-	ELM99481591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481592	-	ELM99481592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481593	-	ELM99481593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99481601	-	ELM99481601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99481602	-	ELM99481602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99481603	-	ELM99481603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99482181	-	ELM99482181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482182	-	ELM99482182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482183	-	ELM99482183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482191	-	ELM99482191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482192	-	ELM99482192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482193	-	ELM99482193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482201	-	ELM99482201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482202	-	ELM99482202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482203	-	ELM99482203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482211	-	ELM99482211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482212	-	ELM99482212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482213	-	ELM99482213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482221	-	ELM99482221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482222	-	ELM99482222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482223	-	ELM99482223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482231	-	ELM99482231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482232	-	ELM99482232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482233	-	ELM99482233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482241	-	ELM99482241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482242	-	ELM99482242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482243	-	ELM99482243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482251	-	ELM99482251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482252	-	ELM99482252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482253	-	ELM99482253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482261	-	ELM99482261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482262	-	ELM99482262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482263	-	ELM99482263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482271	-	ELM99482271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482272	-	ELM99482272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482273	-	ELM99482273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482281	-	ELM99482281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482282	-	ELM99482282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482283	-	ELM99482283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482291	-	ELM99482291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482292	-	ELM99482292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482293	-	ELM99482293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482301	-	ELM99482301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482302	-	ELM99482302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482303	-	ELM99482303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482311	-	ELM99482311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482312	-	ELM99482312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482313	-	ELM99482313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482321	-	ELM99482321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482322	-	ELM99482322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482323	-	ELM99482323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99482331	-	ELM99482331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482332	-	ELM99482332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482333	-	ELM99482333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482341	-	ELM99482341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482342	-	ELM99482342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482343	-	ELM99482343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482351	-	ELM99482351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482352	-	ELM99482352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482353	-	ELM99482353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482361	-	ELM99482361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482362	-	ELM99482362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482363	-	ELM99482363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482371	-	ELM99482371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482372	-	ELM99482372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482373	-	ELM99482373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482381	-	ELM99482381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482382	-	ELM99482382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482383	-	ELM99482383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482391	-	ELM99482391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482392	-	ELM99482392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482393	-	ELM99482393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482401	-	ELM99482401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482402	-	ELM99482402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482403	-	ELM99482403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482411	-	ELM99482411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482412	-	ELM99482412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482413	-	ELM99482413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482421	-	ELM99482421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482422	-	ELM99482422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482423	-	ELM99482423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482431	-	ELM99482431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482432	-	ELM99482432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482433	-	ELM99482433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482441	-	ELM99482441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482442	-	ELM99482442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482443	-	ELM99482443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482451	-	ELM99482451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482452	-	ELM99482452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482453	-	ELM99482453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482461	-	ELM99482461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482462	-	ELM99482462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482463	-	ELM99482463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482471	-	ELM99482471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482472	-	ELM99482472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482473	-	ELM99482473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482481	-	ELM99482481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482482	-	ELM99482482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482483	-	ELM99482483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482491	-	ELM99482491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482492	-	ELM99482492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482493	-	ELM99482493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482501	-	ELM99482501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482502	-	ELM99482502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482503	-	ELM99482503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482511	-	ELM99482511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482512	-	ELM99482512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482513	-	ELM99482513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482521	-	ELM99482521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482522	-	ELM99482522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482523	-	ELM99482523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482531	-	ELM99482531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482532	-	ELM99482532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482533	-	ELM99482533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482541	-	ELM99482541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482542	-	ELM99482542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482543	-	ELM99482543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482551	-	ELM99482551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482552	-	ELM99482552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482553	-	ELM99482553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482561	-	ELM99482561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99482562	-	ELM99482562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482563	-	ELM99482563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482571	-	ELM99482571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482572	-	ELM99482572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482573	-	ELM99482573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482581	-	ELM99482581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482582	-	ELM99482582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482583	-	ELM99482583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482591	-	ELM99482591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482592	-	ELM99482592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482593	-	ELM99482593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99482601	-	ELM99482601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99482602	-	ELM99482602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99482603	-	ELM99482603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483181	-	ELM99483181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483182	-	ELM99483182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483183	-	ELM99483183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483191	-	ELM99483191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483192	-	ELM99483192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483193	-	ELM99483193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483201	-	ELM99483201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483202	-	ELM99483202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483203	-	ELM99483203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483211	-	ELM99483211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483212	-	ELM99483212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483213	-	ELM99483213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483221	-	ELM99483221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483222	-	ELM99483222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483223	-	ELM99483223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483231	-	ELM99483231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483232	-	ELM99483232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483233	-	ELM99483233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483241	-	ELM99483241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483242	-	ELM99483242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483243	-	ELM99483243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483251	-	ELM99483251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483252	-	ELM99483252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483253	-	ELM99483253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483261	-	ELM99483261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483262	-	ELM99483262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483263	-	ELM99483263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483271	-	ELM99483271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483272	-	ELM99483272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483273	-	ELM99483273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483281	-	ELM99483281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483282	-	ELM99483282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483283	-	ELM99483283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483291	-	ELM99483291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483292	-	ELM99483292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483293	-	ELM99483293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483301	-	ELM99483301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483302	-	ELM99483302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483303	-	ELM99483303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483311	-	ELM99483311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483312	-	ELM99483312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483313	-	ELM99483313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483321	-	ELM99483321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483322	-	ELM99483322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483323	-	ELM99483323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483331	-	ELM99483331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483332	-	ELM99483332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483333	-	ELM99483333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483341	-	ELM99483341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483342	-	ELM99483342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483343	-	ELM99483343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483351	-	ELM99483351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483352	-	ELM99483352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483353	-	ELM99483353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483361	-	ELM99483361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483362	-	ELM99483362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99483363	-	ELM99483363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483371	-	ELM99483371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483372	-	ELM99483372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483373	-	ELM99483373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483381	-	ELM99483381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483382	-	ELM99483382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483383	-	ELM99483383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483391	-	ELM99483391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483392	-	ELM99483392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483393	-	ELM99483393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483401	-	ELM99483401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483402	-	ELM99483402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483403	-	ELM99483403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483411	-	ELM99483411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483412	-	ELM99483412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483413	-	ELM99483413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483421	-	ELM99483421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483422	-	ELM99483422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483423	-	ELM99483423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483431	-	ELM99483431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483432	-	ELM99483432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483433	-	ELM99483433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483441	-	ELM99483441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483442	-	ELM99483442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483443	-	ELM99483443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483451	-	ELM99483451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483452	-	ELM99483452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483453	-	ELM99483453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483461	-	ELM99483461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483462	-	ELM99483462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483463	-	ELM99483463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483471	-	ELM99483471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483472	-	ELM99483472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483473	-	ELM99483473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483481	-	ELM99483481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483482	-	ELM99483482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483483	-	ELM99483483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483491	-	ELM99483491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483492	-	ELM99483492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483493	-	ELM99483493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483501	-	ELM99483501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483502	-	ELM99483502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483503	-	ELM99483503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483511	-	ELM99483511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483512	-	ELM99483512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483513	-	ELM99483513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483521	-	ELM99483521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483522	-	ELM99483522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483523	-	ELM99483523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483531	-	ELM99483531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483532	-	ELM99483532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483533	-	ELM99483533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483541	-	ELM99483541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483542	-	ELM99483542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483543	-	ELM99483543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483551	-	ELM99483551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483552	-	ELM99483552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483553	-	ELM99483553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483561	-	ELM99483561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483562	-	ELM99483562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483563	-	ELM99483563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483571	-	ELM99483571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483572	-	ELM99483572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483573	-	ELM99483573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483581	-	ELM99483581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483582	-	ELM99483582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483583	-	ELM99483583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99483591	-	ELM99483591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483592	-	ELM99483592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483593	-	ELM99483593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99483601	-	ELM99483601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99483602	-	ELM99483602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99483603	-	ELM99483603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99491181	-	ELM99491181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491182	-	ELM99491182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491183	-	ELM99491183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491191	-	ELM99491191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491192	-	ELM99491192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491193	-	ELM99491193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491201	-	ELM99491201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491202	-	ELM99491202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491203	-	ELM99491203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491211	-	ELM99491211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491212	-	ELM99491212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491213	-	ELM99491213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491221	-	ELM99491221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491222	-	ELM99491222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491223	-	ELM99491223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491231	-	ELM99491231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491232	-	ELM99491232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491233	-	ELM99491233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491241	-	ELM99491241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491242	-	ELM99491242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491243	-	ELM99491243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491251	-	ELM99491251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491252	-	ELM99491252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491253	-	ELM99491253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491261	-	ELM99491261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491262	-	ELM99491262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491263	-	ELM99491263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491271	-	ELM99491271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491272	-	ELM99491272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491273	-	ELM99491273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491281	-	ELM99491281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491282	-	ELM99491282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491283	-	ELM99491283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491291	-	ELM99491291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491292	-	ELM99491292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491293	-	ELM99491293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491301	-	ELM99491301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491302	-	ELM99491302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491303	-	ELM99491303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491311	-	ELM99491311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491312	-	ELM99491312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491313	-	ELM99491313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491321	-	ELM99491321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491322	-	ELM99491322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491323	-	ELM99491323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491331	-	ELM99491331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491332	-	ELM99491332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491333	-	ELM99491333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491341	-	ELM99491341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491342	-	ELM99491342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491343	-	ELM99491343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491351	-	ELM99491351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491352	-	ELM99491352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491353	-	ELM99491353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491361	-	ELM99491361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491362	-	ELM99491362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491363	-	ELM99491363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491371	-	ELM99491371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491372	-	ELM99491372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491373	-	ELM99491373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491381	-	ELM99491381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491382	-	ELM99491382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491383	-	ELM99491383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491391	-	ELM99491391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491392	-	ELM99491392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491393	-	ELM99491393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491401	-	ELM99491401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99491402	-	ELM99491402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491403	-	ELM99491403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491411	-	ELM99491411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491412	-	ELM99491412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491413	-	ELM99491413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491421	-	ELM99491421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491422	-	ELM99491422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491423	-	ELM99491423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491431	-	ELM99491431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491432	-	ELM99491432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491433	-	ELM99491433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491441	-	ELM99491441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491442	-	ELM99491442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491443	-	ELM99491443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491451	-	ELM99491451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491452	-	ELM99491452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491453	-	ELM99491453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491461	-	ELM99491461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491462	-	ELM99491462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491463	-	ELM99491463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491471	-	ELM99491471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491472	-	ELM99491472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491473	-	ELM99491473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491481	-	ELM99491481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491482	-	ELM99491482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491483	-	ELM99491483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491491	-	ELM99491491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491492	-	ELM99491492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491493	-	ELM99491493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491501	-	ELM99491501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491502	-	ELM99491502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491503	-	ELM99491503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491511	-	ELM99491511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491512	-	ELM99491512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491513	-	ELM99491513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491521	-	ELM99491521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491522	-	ELM99491522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491523	-	ELM99491523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491531	-	ELM99491531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491532	-	ELM99491532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491533	-	ELM99491533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491541	-	ELM99491541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491542	-	ELM99491542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491543	-	ELM99491543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491551	-	ELM99491551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491552	-	ELM99491552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491553	-	ELM99491553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491561	-	ELM99491561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491562	-	ELM99491562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491563	-	ELM99491563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491571	-	ELM99491571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491572	-	ELM99491572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491573	-	ELM99491573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491581	-	ELM99491581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491582	-	ELM99491582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491583	-	ELM99491583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491591	-	ELM99491591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491592	-	ELM99491592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491593	-	ELM99491593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99491601	-	ELM99491601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99491602	-	ELM99491602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99491603	-	ELM99491603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99492181	-	ELM99492181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492182	-	ELM99492182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492183	-	ELM99492183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492191	-	ELM99492191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492192	-	ELM99492192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492193	-	ELM99492193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492201	-	ELM99492201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492202	-	ELM99492202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99492203	-	ELM99492203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492211	-	ELM99492211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492212	-	ELM99492212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492213	-	ELM99492213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492221	-	ELM99492221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492222	-	ELM99492222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492223	-	ELM99492223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492231	-	ELM99492231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492232	-	ELM99492232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492233	-	ELM99492233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492241	-	ELM99492241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492242	-	ELM99492242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492243	-	ELM99492243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492251	-	ELM99492251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492252	-	ELM99492252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492253	-	ELM99492253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492261	-	ELM99492261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492262	-	ELM99492262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492263	-	ELM99492263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492271	-	ELM99492271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492272	-	ELM99492272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492273	-	ELM99492273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492281	-	ELM99492281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492282	-	ELM99492282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492283	-	ELM99492283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492291	-	ELM99492291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492292	-	ELM99492292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492293	-	ELM99492293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492301	-	ELM99492301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492302	-	ELM99492302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492303	-	ELM99492303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492311	-	ELM99492311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492312	-	ELM99492312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492313	-	ELM99492313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492321	-	ELM99492321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492322	-	ELM99492322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492323	-	ELM99492323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492331	-	ELM99492331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492332	-	ELM99492332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492333	-	ELM99492333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492341	-	ELM99492341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492342	-	ELM99492342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492343	-	ELM99492343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492351	-	ELM99492351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492352	-	ELM99492352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492353	-	ELM99492353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492361	-	ELM99492361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492362	-	ELM99492362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492363	-	ELM99492363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492371	-	ELM99492371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492372	-	ELM99492372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492373	-	ELM99492373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492381	-	ELM99492381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492382	-	ELM99492382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492383	-	ELM99492383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492391	-	ELM99492391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492392	-	ELM99492392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492393	-	ELM99492393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492401	-	ELM99492401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492402	-	ELM99492402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492403	-	ELM99492403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492411	-	ELM99492411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492412	-	ELM99492412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492413	-	ELM99492413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492421	-	ELM99492421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492422	-	ELM99492422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492423	-	ELM99492423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492431	-	ELM99492431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492432	-	ELM99492432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492433	-	ELM99492433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99492441	-	ELM99492441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492442	-	ELM99492442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492443	-	ELM99492443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492451	-	ELM99492451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492452	-	ELM99492452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492453	-	ELM99492453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492461	-	ELM99492461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492462	-	ELM99492462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492463	-	ELM99492463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492471	-	ELM99492471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492472	-	ELM99492472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492473	-	ELM99492473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492481	-	ELM99492481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492482	-	ELM99492482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492483	-	ELM99492483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492491	-	ELM99492491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492492	-	ELM99492492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492493	-	ELM99492493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492501	-	ELM99492501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492502	-	ELM99492502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492503	-	ELM99492503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492511	-	ELM99492511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492512	-	ELM99492512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492513	-	ELM99492513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492521	-	ELM99492521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492522	-	ELM99492522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492523	-	ELM99492523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492531	-	ELM99492531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492532	-	ELM99492532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492533	-	ELM99492533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492541	-	ELM99492541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492542	-	ELM99492542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492543	-	ELM99492543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492551	-	ELM99492551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492552	-	ELM99492552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492553	-	ELM99492553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492561	-	ELM99492561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492562	-	ELM99492562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492563	-	ELM99492563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492571	-	ELM99492571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492572	-	ELM99492572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492573	-	ELM99492573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492581	-	ELM99492581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492582	-	ELM99492582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492583	-	ELM99492583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492591	-	ELM99492591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492592	-	ELM99492592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492593	-	ELM99492593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99492601	-	ELM99492601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99492602	-	ELM99492602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99492603	-	ELM99492603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493181	-	ELM99493181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493182	-	ELM99493182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493183	-	ELM99493183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493191	-	ELM99493191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493192	-	ELM99493192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493193	-	ELM99493193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493201	-	ELM99493201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493202	-	ELM99493202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493203	-	ELM99493203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493211	-	ELM99493211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493212	-	ELM99493212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493213	-	ELM99493213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493221	-	ELM99493221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493222	-	ELM99493222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493223	-	ELM99493223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493231	-	ELM99493231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493232	-	ELM99493232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493233	-	ELM99493233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493241	-	ELM99493241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99493242	-	ELM99493242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493243	-	ELM99493243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493251	-	ELM99493251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493252	-	ELM99493252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493253	-	ELM99493253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493261	-	ELM99493261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493262	-	ELM99493262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493263	-	ELM99493263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493271	-	ELM99493271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493272	-	ELM99493272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493273	-	ELM99493273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493281	-	ELM99493281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493282	-	ELM99493282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493283	-	ELM99493283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493291	-	ELM99493291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493292	-	ELM99493292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493293	-	ELM99493293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493301	-	ELM99493301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493302	-	ELM99493302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493303	-	ELM99493303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493311	-	ELM99493311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493312	-	ELM99493312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493313	-	ELM99493313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493321	-	ELM99493321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493322	-	ELM99493322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493323	-	ELM99493323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493331	-	ELM99493331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493332	-	ELM99493332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493333	-	ELM99493333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493341	-	ELM99493341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493342	-	ELM99493342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493343	-	ELM99493343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493351	-	ELM99493351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493352	-	ELM99493352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493353	-	ELM99493353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493361	-	ELM99493361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493362	-	ELM99493362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493363	-	ELM99493363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493371	-	ELM99493371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493372	-	ELM99493372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493373	-	ELM99493373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493381	-	ELM99493381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493382	-	ELM99493382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493383	-	ELM99493383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493391	-	ELM99493391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493392	-	ELM99493392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493393	-	ELM99493393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493401	-	ELM99493401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493402	-	ELM99493402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493403	-	ELM99493403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493411	-	ELM99493411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493412	-	ELM99493412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493413	-	ELM99493413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493421	-	ELM99493421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493422	-	ELM99493422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493423	-	ELM99493423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493431	-	ELM99493431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493432	-	ELM99493432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493433	-	ELM99493433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493441	-	ELM99493441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493442	-	ELM99493442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493443	-	ELM99493443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493451	-	ELM99493451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493452	-	ELM99493452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493453	-	ELM99493453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493461	-	ELM99493461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493462	-	ELM99493462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493463	-	ELM99493463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493471	-	ELM99493471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493472	-	ELM99493472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99493473	-	ELM99493473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493481	-	ELM99493481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493482	-	ELM99493482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493483	-	ELM99493483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493491	-	ELM99493491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493492	-	ELM99493492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493493	-	ELM99493493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493501	-	ELM99493501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493502	-	ELM99493502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493503	-	ELM99493503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493511	-	ELM99493511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493512	-	ELM99493512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493513	-	ELM99493513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493521	-	ELM99493521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493522	-	ELM99493522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493523	-	ELM99493523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493531	-	ELM99493531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493532	-	ELM99493532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493533	-	ELM99493533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493541	-	ELM99493541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493542	-	ELM99493542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493543	-	ELM99493543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493551	-	ELM99493551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493552	-	ELM99493552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493553	-	ELM99493553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493561	-	ELM99493561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493562	-	ELM99493562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493563	-	ELM99493563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493571	-	ELM99493571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493572	-	ELM99493572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493573	-	ELM99493573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493581	-	ELM99493581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493582	-	ELM99493582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493583	-	ELM99493583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493591	-	ELM99493591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493592	-	ELM99493592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493593	-	ELM99493593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99493601	-	ELM99493601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99493602	-	ELM99493602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99493603	-	ELM99493603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99501181	-	ELM99501181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501182	-	ELM99501182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501183	-	ELM99501183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501191	-	ELM99501191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501192	-	ELM99501192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501193	-	ELM99501193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501201	-	ELM99501201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501202	-	ELM99501202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501203	-	ELM99501203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501211	-	ELM99501211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501212	-	ELM99501212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501213	-	ELM99501213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501221	-	ELM99501221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501222	-	ELM99501222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501223	-	ELM99501223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501231	-	ELM99501231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501232	-	ELM99501232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501233	-	ELM99501233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501241	-	ELM99501241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501242	-	ELM99501242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501243	-	ELM99501243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501251	-	ELM99501251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501252	-	ELM99501252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501253	-	ELM99501253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501261	-	ELM99501261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501262	-	ELM99501262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501263	-	ELM99501263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501271	-	ELM99501271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501272	-	ELM99501272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501273	-	ELM99501273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99501281	-	ELM99501281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501282	-	ELM99501282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501283	-	ELM99501283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501291	-	ELM99501291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501292	-	ELM99501292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501293	-	ELM99501293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501301	-	ELM99501301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501302	-	ELM99501302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501303	-	ELM99501303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501311	-	ELM99501311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501312	-	ELM99501312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501313	-	ELM99501313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501321	-	ELM99501321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501322	-	ELM99501322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501323	-	ELM99501323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501331	-	ELM99501331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501332	-	ELM99501332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501333	-	ELM99501333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501341	-	ELM99501341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501342	-	ELM99501342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501343	-	ELM99501343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501351	-	ELM99501351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501352	-	ELM99501352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501353	-	ELM99501353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501361	-	ELM99501361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501362	-	ELM99501362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501363	-	ELM99501363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501371	-	ELM99501371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501372	-	ELM99501372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501373	-	ELM99501373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501381	-	ELM99501381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501382	-	ELM99501382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501383	-	ELM99501383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501391	-	ELM99501391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501392	-	ELM99501392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501393	-	ELM99501393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501401	-	ELM99501401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501402	-	ELM99501402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501403	-	ELM99501403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501411	-	ELM99501411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501412	-	ELM99501412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501413	-	ELM99501413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501421	-	ELM99501421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501422	-	ELM99501422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501423	-	ELM99501423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501431	-	ELM99501431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501432	-	ELM99501432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501433	-	ELM99501433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501441	-	ELM99501441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501442	-	ELM99501442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501443	-	ELM99501443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501451	-	ELM99501451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501452	-	ELM99501452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501453	-	ELM99501453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501461	-	ELM99501461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501462	-	ELM99501462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501463	-	ELM99501463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501471	-	ELM99501471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501472	-	ELM99501472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501473	-	ELM99501473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501481	-	ELM99501481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501482	-	ELM99501482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501483	-	ELM99501483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501491	-	ELM99501491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501492	-	ELM99501492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501493	-	ELM99501493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501501	-	ELM99501501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501502	-	ELM99501502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501503	-	ELM99501503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501511	-	ELM99501511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99501512	-	ELM99501512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501513	-	ELM99501513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501521	-	ELM99501521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501522	-	ELM99501522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501523	-	ELM99501523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501531	-	ELM99501531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501532	-	ELM99501532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501533	-	ELM99501533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501541	-	ELM99501541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501542	-	ELM99501542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501543	-	ELM99501543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501551	-	ELM99501551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501552	-	ELM99501552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501553	-	ELM99501553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501561	-	ELM99501561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501562	-	ELM99501562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501563	-	ELM99501563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501571	-	ELM99501571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501572	-	ELM99501572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501573	-	ELM99501573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501581	-	ELM99501581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501582	-	ELM99501582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501583	-	ELM99501583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501591	-	ELM99501591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501592	-	ELM99501592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501593	-	ELM99501593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99501601	-	ELM99501601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99501602	-	ELM99501602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99501603	-	ELM99501603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99502181	-	ELM99502181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502182	-	ELM99502182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502183	-	ELM99502183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502191	-	ELM99502191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502192	-	ELM99502192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502193	-	ELM99502193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502201	-	ELM99502201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502202	-	ELM99502202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502203	-	ELM99502203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502211	-	ELM99502211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502212	-	ELM99502212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502213	-	ELM99502213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502221	-	ELM99502221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502222	-	ELM99502222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502223	-	ELM99502223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502231	-	ELM99502231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502232	-	ELM99502232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502233	-	ELM99502233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502241	-	ELM99502241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502242	-	ELM99502242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502243	-	ELM99502243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502251	-	ELM99502251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502252	-	ELM99502252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502253	-	ELM99502253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502261	-	ELM99502261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502262	-	ELM99502262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502263	-	ELM99502263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502271	-	ELM99502271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502272	-	ELM99502272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502273	-	ELM99502273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502281	-	ELM99502281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502282	-	ELM99502282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502283	-	ELM99502283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502291	-	ELM99502291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502292	-	ELM99502292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502293	-	ELM99502293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502301	-	ELM99502301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502302	-	ELM99502302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502303	-	ELM99502303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502311	-	ELM99502311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502312	-	ELM99502312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99502313	-	ELM99502313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502321	-	ELM99502321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502322	-	ELM99502322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502323	-	ELM99502323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502331	-	ELM99502331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502332	-	ELM99502332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502333	-	ELM99502333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502341	-	ELM99502341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502342	-	ELM99502342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502343	-	ELM99502343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502351	-	ELM99502351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502352	-	ELM99502352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502353	-	ELM99502353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502361	-	ELM99502361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502362	-	ELM99502362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502363	-	ELM99502363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502371	-	ELM99502371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502372	-	ELM99502372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502373	-	ELM99502373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502381	-	ELM99502381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502382	-	ELM99502382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502383	-	ELM99502383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502391	-	ELM99502391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502392	-	ELM99502392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502393	-	ELM99502393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502401	-	ELM99502401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502402	-	ELM99502402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502403	-	ELM99502403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502411	-	ELM99502411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502412	-	ELM99502412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502413	-	ELM99502413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502421	-	ELM99502421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502422	-	ELM99502422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502423	-	ELM99502423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502431	-	ELM99502431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502432	-	ELM99502432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502433	-	ELM99502433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502441	-	ELM99502441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502442	-	ELM99502442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502443	-	ELM99502443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502451	-	ELM99502451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502452	-	ELM99502452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502453	-	ELM99502453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502461	-	ELM99502461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502462	-	ELM99502462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502463	-	ELM99502463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502471	-	ELM99502471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502472	-	ELM99502472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502473	-	ELM99502473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502481	-	ELM99502481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502482	-	ELM99502482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502483	-	ELM99502483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502491	-	ELM99502491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502492	-	ELM99502492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502493	-	ELM99502493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502501	-	ELM99502501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502502	-	ELM99502502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502503	-	ELM99502503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502511	-	ELM99502511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502512	-	ELM99502512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502513	-	ELM99502513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502521	-	ELM99502521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502522	-	ELM99502522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502523	-	ELM99502523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502531	-	ELM99502531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502532	-	ELM99502532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502533	-	ELM99502533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502541	-	ELM99502541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502542	-	ELM99502542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502543	-	ELM99502543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99502551	-	ELM99502551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502552	-	ELM99502552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502553	-	ELM99502553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502561	-	ELM99502561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502562	-	ELM99502562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502563	-	ELM99502563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502571	-	ELM99502571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502572	-	ELM99502572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502573	-	ELM99502573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502581	-	ELM99502581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502582	-	ELM99502582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502583	-	ELM99502583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502591	-	ELM99502591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502592	-	ELM99502592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502593	-	ELM99502593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99502601	-	ELM99502601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99502602	-	ELM99502602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99502603	-	ELM99502603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503181	-	ELM99503181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503182	-	ELM99503182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503183	-	ELM99503183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503191	-	ELM99503191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503192	-	ELM99503192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503193	-	ELM99503193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503201	-	ELM99503201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503202	-	ELM99503202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503203	-	ELM99503203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503211	-	ELM99503211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503212	-	ELM99503212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503213	-	ELM99503213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503221	-	ELM99503221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503222	-	ELM99503222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503223	-	ELM99503223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503231	-	ELM99503231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503232	-	ELM99503232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503233	-	ELM99503233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503241	-	ELM99503241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503242	-	ELM99503242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503243	-	ELM99503243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503251	-	ELM99503251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503252	-	ELM99503252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503253	-	ELM99503253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503261	-	ELM99503261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503262	-	ELM99503262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503263	-	ELM99503263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503271	-	ELM99503271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503272	-	ELM99503272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503273	-	ELM99503273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503281	-	ELM99503281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503282	-	ELM99503282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503283	-	ELM99503283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503291	-	ELM99503291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503292	-	ELM99503292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503293	-	ELM99503293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503301	-	ELM99503301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503302	-	ELM99503302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503303	-	ELM99503303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503311	-	ELM99503311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503312	-	ELM99503312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503313	-	ELM99503313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503321	-	ELM99503321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503322	-	ELM99503322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503323	-	ELM99503323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503331	-	ELM99503331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503332	-	ELM99503332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503333	-	ELM99503333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503341	-	ELM99503341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503342	-	ELM99503342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503343	-	ELM99503343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503351	-	ELM99503351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99503352	-	ELM99503352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503353	-	ELM99503353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503361	-	ELM99503361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503362	-	ELM99503362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503363	-	ELM99503363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503371	-	ELM99503371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503372	-	ELM99503372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503373	-	ELM99503373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503381	-	ELM99503381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503382	-	ELM99503382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503383	-	ELM99503383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503391	-	ELM99503391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503392	-	ELM99503392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503393	-	ELM99503393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503401	-	ELM99503401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503402	-	ELM99503402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503403	-	ELM99503403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503411	-	ELM99503411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503412	-	ELM99503412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503413	-	ELM99503413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503421	-	ELM99503421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503422	-	ELM99503422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503423	-	ELM99503423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503431	-	ELM99503431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503432	-	ELM99503432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503433	-	ELM99503433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503441	-	ELM99503441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503442	-	ELM99503442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503443	-	ELM99503443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503451	-	ELM99503451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503452	-	ELM99503452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503453	-	ELM99503453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503461	-	ELM99503461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503462	-	ELM99503462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503463	-	ELM99503463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503471	-	ELM99503471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503472	-	ELM99503472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503473	-	ELM99503473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503481	-	ELM99503481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503482	-	ELM99503482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503483	-	ELM99503483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503491	-	ELM99503491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503492	-	ELM99503492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503493	-	ELM99503493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503501	-	ELM99503501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503502	-	ELM99503502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503503	-	ELM99503503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503511	-	ELM99503511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503512	-	ELM99503512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503513	-	ELM99503513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503521	-	ELM99503521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503522	-	ELM99503522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503523	-	ELM99503523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503531	-	ELM99503531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503532	-	ELM99503532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503533	-	ELM99503533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503541	-	ELM99503541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503542	-	ELM99503542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503543	-	ELM99503543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503551	-	ELM99503551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503552	-	ELM99503552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503553	-	ELM99503553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503561	-	ELM99503561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503562	-	ELM99503562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503563	-	ELM99503563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503571	-	ELM99503571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503572	-	ELM99503572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503573	-	ELM99503573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503581	-	ELM99503581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503582	-	ELM99503582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99503583	-	ELM99503583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503591	-	ELM99503591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503592	-	ELM99503592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503593	-	ELM99503593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99503601	-	ELM99503601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99503602	-	ELM99503602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99503603	-	ELM99503603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99511181	-	ELM99511181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511182	-	ELM99511182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511183	-	ELM99511183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511191	-	ELM99511191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511192	-	ELM99511192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511193	-	ELM99511193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511201	-	ELM99511201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511202	-	ELM99511202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511203	-	ELM99511203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511211	-	ELM99511211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511212	-	ELM99511212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511213	-	ELM99511213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511221	-	ELM99511221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511222	-	ELM99511222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511223	-	ELM99511223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511231	-	ELM99511231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511232	-	ELM99511232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511233	-	ELM99511233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511241	-	ELM99511241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511242	-	ELM99511242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511243	-	ELM99511243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511251	-	ELM99511251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511252	-	ELM99511252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511253	-	ELM99511253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511261	-	ELM99511261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511262	-	ELM99511262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511263	-	ELM99511263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511271	-	ELM99511271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511272	-	ELM99511272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511273	-	ELM99511273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511281	-	ELM99511281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511282	-	ELM99511282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511283	-	ELM99511283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511291	-	ELM99511291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511292	-	ELM99511292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511293	-	ELM99511293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511301	-	ELM99511301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511302	-	ELM99511302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511303	-	ELM99511303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511311	-	ELM99511311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511312	-	ELM99511312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511313	-	ELM99511313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511321	-	ELM99511321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511322	-	ELM99511322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511323	-	ELM99511323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511331	-	ELM99511331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511332	-	ELM99511332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511333	-	ELM99511333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511341	-	ELM99511341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511342	-	ELM99511342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511343	-	ELM99511343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511351	-	ELM99511351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511352	-	ELM99511352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511353	-	ELM99511353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511361	-	ELM99511361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511362	-	ELM99511362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511363	-	ELM99511363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511371	-	ELM99511371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511372	-	ELM99511372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511373	-	ELM99511373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511381	-	ELM99511381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511382	-	ELM99511382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511383	-	ELM99511383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99511391	-	ELM99511391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511392	-	ELM99511392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511393	-	ELM99511393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511401	-	ELM99511401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511402	-	ELM99511402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511403	-	ELM99511403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511411	-	ELM99511411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511412	-	ELM99511412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511413	-	ELM99511413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511421	-	ELM99511421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511422	-	ELM99511422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511423	-	ELM99511423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511431	-	ELM99511431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511432	-	ELM99511432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511433	-	ELM99511433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511441	-	ELM99511441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511442	-	ELM99511442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511443	-	ELM99511443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511451	-	ELM99511451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511452	-	ELM99511452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511453	-	ELM99511453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511461	-	ELM99511461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511462	-	ELM99511462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511463	-	ELM99511463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511471	-	ELM99511471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511472	-	ELM99511472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511473	-	ELM99511473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511481	-	ELM99511481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511482	-	ELM99511482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511483	-	ELM99511483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511491	-	ELM99511491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511492	-	ELM99511492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511493	-	ELM99511493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511501	-	ELM99511501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511502	-	ELM99511502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511503	-	ELM99511503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511511	-	ELM99511511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511512	-	ELM99511512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511513	-	ELM99511513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511521	-	ELM99511521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511522	-	ELM99511522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511523	-	ELM99511523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511531	-	ELM99511531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511532	-	ELM99511532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511533	-	ELM99511533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511541	-	ELM99511541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511542	-	ELM99511542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511543	-	ELM99511543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511551	-	ELM99511551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511552	-	ELM99511552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511553	-	ELM99511553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511561	-	ELM99511561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511562	-	ELM99511562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511563	-	ELM99511563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511571	-	ELM99511571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511572	-	ELM99511572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511573	-	ELM99511573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511581	-	ELM99511581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511582	-	ELM99511582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511583	-	ELM99511583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511591	-	ELM99511591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511592	-	ELM99511592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511593	-	ELM99511593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99511601	-	ELM99511601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99511602	-	ELM99511602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99511603	-	ELM99511603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99512181	-	ELM99512181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512182	-	ELM99512182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512183	-	ELM99512183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512191	-	ELM99512191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99512192	-	ELM99512192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512193	-	ELM99512193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512201	-	ELM99512201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512202	-	ELM99512202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512203	-	ELM99512203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512211	-	ELM99512211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512212	-	ELM99512212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512213	-	ELM99512213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512221	-	ELM99512221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512222	-	ELM99512222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512223	-	ELM99512223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512231	-	ELM99512231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512232	-	ELM99512232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512233	-	ELM99512233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512241	-	ELM99512241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512242	-	ELM99512242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512243	-	ELM99512243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512251	-	ELM99512251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512252	-	ELM99512252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512253	-	ELM99512253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512261	-	ELM99512261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512262	-	ELM99512262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512263	-	ELM99512263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512271	-	ELM99512271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512272	-	ELM99512272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512273	-	ELM99512273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512281	-	ELM99512281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512282	-	ELM99512282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512283	-	ELM99512283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512291	-	ELM99512291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512292	-	ELM99512292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512293	-	ELM99512293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512301	-	ELM99512301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512302	-	ELM99512302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512303	-	ELM99512303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512311	-	ELM99512311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512312	-	ELM99512312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512313	-	ELM99512313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512321	-	ELM99512321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512322	-	ELM99512322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512323	-	ELM99512323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512331	-	ELM99512331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512332	-	ELM99512332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512333	-	ELM99512333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512341	-	ELM99512341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512342	-	ELM99512342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512343	-	ELM99512343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512351	-	ELM99512351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512352	-	ELM99512352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512353	-	ELM99512353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512361	-	ELM99512361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512362	-	ELM99512362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512363	-	ELM99512363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512371	-	ELM99512371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512372	-	ELM99512372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512373	-	ELM99512373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512381	-	ELM99512381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512382	-	ELM99512382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512383	-	ELM99512383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512391	-	ELM99512391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512392	-	ELM99512392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512393	-	ELM99512393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512401	-	ELM99512401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512402	-	ELM99512402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512403	-	ELM99512403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512411	-	ELM99512411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512412	-	ELM99512412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512413	-	ELM99512413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512421	-	ELM99512421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512422	-	ELM99512422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99512423	-	ELM99512423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512431	-	ELM99512431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512432	-	ELM99512432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512433	-	ELM99512433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512441	-	ELM99512441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512442	-	ELM99512442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512443	-	ELM99512443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512451	-	ELM99512451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512452	-	ELM99512452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512453	-	ELM99512453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512461	-	ELM99512461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512462	-	ELM99512462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512463	-	ELM99512463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512471	-	ELM99512471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512472	-	ELM99512472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512473	-	ELM99512473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512481	-	ELM99512481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512482	-	ELM99512482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512483	-	ELM99512483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512491	-	ELM99512491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512492	-	ELM99512492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512493	-	ELM99512493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512501	-	ELM99512501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512502	-	ELM99512502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512503	-	ELM99512503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512511	-	ELM99512511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512512	-	ELM99512512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512513	-	ELM99512513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512521	-	ELM99512521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512522	-	ELM99512522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512523	-	ELM99512523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512531	-	ELM99512531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512532	-	ELM99512532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512533	-	ELM99512533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512541	-	ELM99512541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512542	-	ELM99512542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512543	-	ELM99512543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512551	-	ELM99512551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512552	-	ELM99512552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512553	-	ELM99512553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512561	-	ELM99512561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512562	-	ELM99512562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512563	-	ELM99512563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512571	-	ELM99512571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512572	-	ELM99512572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512573	-	ELM99512573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512581	-	ELM99512581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512582	-	ELM99512582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512583	-	ELM99512583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512591	-	ELM99512591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512592	-	ELM99512592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512593	-	ELM99512593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99512601	-	ELM99512601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99512602	-	ELM99512602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99512603	-	ELM99512603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513181	-	ELM99513181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513182	-	ELM99513182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513183	-	ELM99513183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513191	-	ELM99513191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513192	-	ELM99513192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513193	-	ELM99513193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513201	-	ELM99513201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513202	-	ELM99513202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513203	-	ELM99513203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513211	-	ELM99513211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513212	-	ELM99513212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513213	-	ELM99513213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513221	-	ELM99513221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513222	-	ELM99513222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513223	-	ELM99513223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99513231	-	ELM99513231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513232	-	ELM99513232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513233	-	ELM99513233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513241	-	ELM99513241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513242	-	ELM99513242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513243	-	ELM99513243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513251	-	ELM99513251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513252	-	ELM99513252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513253	-	ELM99513253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513261	-	ELM99513261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513262	-	ELM99513262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513263	-	ELM99513263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513271	-	ELM99513271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513272	-	ELM99513272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513273	-	ELM99513273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513281	-	ELM99513281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513282	-	ELM99513282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513283	-	ELM99513283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513291	-	ELM99513291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513292	-	ELM99513292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513293	-	ELM99513293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513301	-	ELM99513301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513302	-	ELM99513302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513303	-	ELM99513303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513311	-	ELM99513311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513312	-	ELM99513312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513313	-	ELM99513313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513321	-	ELM99513321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513322	-	ELM99513322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513323	-	ELM99513323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513331	-	ELM99513331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513332	-	ELM99513332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513333	-	ELM99513333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513341	-	ELM99513341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513342	-	ELM99513342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513343	-	ELM99513343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513351	-	ELM99513351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513352	-	ELM99513352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513353	-	ELM99513353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513361	-	ELM99513361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513362	-	ELM99513362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513363	-	ELM99513363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513371	-	ELM99513371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513372	-	ELM99513372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513373	-	ELM99513373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513381	-	ELM99513381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513382	-	ELM99513382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513383	-	ELM99513383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513391	-	ELM99513391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513392	-	ELM99513392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513393	-	ELM99513393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513401	-	ELM99513401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513402	-	ELM99513402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513403	-	ELM99513403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513411	-	ELM99513411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513412	-	ELM99513412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513413	-	ELM99513413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513421	-	ELM99513421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513422	-	ELM99513422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513423	-	ELM99513423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513431	-	ELM99513431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513432	-	ELM99513432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513433	-	ELM99513433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513441	-	ELM99513441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513442	-	ELM99513442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513443	-	ELM99513443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513451	-	ELM99513451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513452	-	ELM99513452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513453	-	ELM99513453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513461	-	ELM99513461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99513462	-	ELM99513462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513463	-	ELM99513463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513471	-	ELM99513471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513472	-	ELM99513472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513473	-	ELM99513473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513481	-	ELM99513481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513482	-	ELM99513482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513483	-	ELM99513483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513491	-	ELM99513491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513492	-	ELM99513492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513493	-	ELM99513493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513501	-	ELM99513501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513502	-	ELM99513502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513503	-	ELM99513503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513511	-	ELM99513511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513512	-	ELM99513512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513513	-	ELM99513513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513521	-	ELM99513521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513522	-	ELM99513522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513523	-	ELM99513523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513531	-	ELM99513531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513532	-	ELM99513532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513533	-	ELM99513533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513541	-	ELM99513541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513542	-	ELM99513542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513543	-	ELM99513543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513551	-	ELM99513551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513552	-	ELM99513552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513553	-	ELM99513553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513561	-	ELM99513561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513562	-	ELM99513562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513563	-	ELM99513563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513571	-	ELM99513571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513572	-	ELM99513572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513573	-	ELM99513573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513581	-	ELM99513581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513582	-	ELM99513582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513583	-	ELM99513583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513591	-	ELM99513591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513592	-	ELM99513592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513593	-	ELM99513593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99513601	-	ELM99513601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99513602	-	ELM99513602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99513603	-	ELM99513603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.1V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99521181	-	ELM99521181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521182	-	ELM99521182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521183	-	ELM99521183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521191	-	ELM99521191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521192	-	ELM99521192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521193	-	ELM99521193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521201	-	ELM99521201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521202	-	ELM99521202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521203	-	ELM99521203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521211	-	ELM99521211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521212	-	ELM99521212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521213	-	ELM99521213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521221	-	ELM99521221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521222	-	ELM99521222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521223	-	ELM99521223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521231	-	ELM99521231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521232	-	ELM99521232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521233	-	ELM99521233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521241	-	ELM99521241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521242	-	ELM99521242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521243	-	ELM99521243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521251	-	ELM99521251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521252	-	ELM99521252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521253	-	ELM99521253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521261	-	ELM99521261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521262	-	ELM99521262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99521263	-	ELM99521263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521271	-	ELM99521271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521272	-	ELM99521272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521273	-	ELM99521273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521281	-	ELM99521281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521282	-	ELM99521282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521283	-	ELM99521283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521291	-	ELM99521291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521292	-	ELM99521292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521293	-	ELM99521293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521301	-	ELM99521301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521302	-	ELM99521302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521303	-	ELM99521303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521311	-	ELM99521311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521312	-	ELM99521312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521313	-	ELM99521313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521321	-	ELM99521321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521322	-	ELM99521322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521323	-	ELM99521323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521331	-	ELM99521331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521332	-	ELM99521332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521333	-	ELM99521333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521341	-	ELM99521341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521342	-	ELM99521342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521343	-	ELM99521343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521351	-	ELM99521351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521352	-	ELM99521352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521353	-	ELM99521353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521361	-	ELM99521361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521362	-	ELM99521362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521363	-	ELM99521363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521371	-	ELM99521371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521372	-	ELM99521372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521373	-	ELM99521373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521381	-	ELM99521381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521382	-	ELM99521382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521383	-	ELM99521383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521391	-	ELM99521391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521392	-	ELM99521392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521393	-	ELM99521393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521401	-	ELM99521401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521402	-	ELM99521402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521403	-	ELM99521403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521411	-	ELM99521411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521412	-	ELM99521412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521413	-	ELM99521413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521421	-	ELM99521421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521422	-	ELM99521422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521423	-	ELM99521423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521431	-	ELM99521431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521432	-	ELM99521432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521433	-	ELM99521433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521441	-	ELM99521441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521442	-	ELM99521442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521443	-	ELM99521443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521451	-	ELM99521451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521452	-	ELM99521452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521453	-	ELM99521453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521461	-	ELM99521461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521462	-	ELM99521462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521463	-	ELM99521463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521471	-	ELM99521471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521472	-	ELM99521472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521473	-	ELM99521473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521481	-	ELM99521481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521482	-	ELM99521482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521483	-	ELM99521483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521491	-	ELM99521491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521492	-	ELM99521492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521493	-	ELM99521493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99521501	-	ELM99521501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521502	-	ELM99521502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521503	-	ELM99521503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521511	-	ELM99521511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521512	-	ELM99521512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521513	-	ELM99521513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521521	-	ELM99521521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521522	-	ELM99521522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521523	-	ELM99521523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521531	-	ELM99521531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521532	-	ELM99521532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521533	-	ELM99521533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521541	-	ELM99521541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521542	-	ELM99521542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521543	-	ELM99521543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521551	-	ELM99521551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521552	-	ELM99521552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521553	-	ELM99521553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521561	-	ELM99521561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521562	-	ELM99521562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521563	-	ELM99521563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521571	-	ELM99521571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521572	-	ELM99521572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521573	-	ELM99521573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521581	-	ELM99521581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521582	-	ELM99521582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521583	-	ELM99521583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521591	-	ELM99521591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521592	-	ELM99521592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521593	-	ELM99521593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99521601	-	ELM99521601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99521602	-	ELM99521602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99521603	-	ELM99521603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99522181	-	ELM99522181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522182	-	ELM99522182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522183	-	ELM99522183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522191	-	ELM99522191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522192	-	ELM99522192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522193	-	ELM99522193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522201	-	ELM99522201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522202	-	ELM99522202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522203	-	ELM99522203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522211	-	ELM99522211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522212	-	ELM99522212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522213	-	ELM99522213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522221	-	ELM99522221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522222	-	ELM99522222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522223	-	ELM99522223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522231	-	ELM99522231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522232	-	ELM99522232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522233	-	ELM99522233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522241	-	ELM99522241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522242	-	ELM99522242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522243	-	ELM99522243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522251	-	ELM99522251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522252	-	ELM99522252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522253	-	ELM99522253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522261	-	ELM99522261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522262	-	ELM99522262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522263	-	ELM99522263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522271	-	ELM99522271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522272	-	ELM99522272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522273	-	ELM99522273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522281	-	ELM99522281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522282	-	ELM99522282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522283	-	ELM99522283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522291	-	ELM99522291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522292	-	ELM99522292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522293	-	ELM99522293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522301	-	ELM99522301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99522302	-	ELM99522302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522303	-	ELM99522303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522311	-	ELM99522311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522312	-	ELM99522312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522313	-	ELM99522313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522321	-	ELM99522321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522322	-	ELM99522322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522323	-	ELM99522323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522331	-	ELM99522331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522332	-	ELM99522332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522333	-	ELM99522333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522341	-	ELM99522341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522342	-	ELM99522342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522343	-	ELM99522343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522351	-	ELM99522351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522352	-	ELM99522352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522353	-	ELM99522353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522361	-	ELM99522361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522362	-	ELM99522362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522363	-	ELM99522363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522371	-	ELM99522371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522372	-	ELM99522372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522373	-	ELM99522373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522381	-	ELM99522381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522382	-	ELM99522382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522383	-	ELM99522383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522391	-	ELM99522391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522392	-	ELM99522392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522393	-	ELM99522393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522401	-	ELM99522401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522402	-	ELM99522402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522403	-	ELM99522403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522411	-	ELM99522411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522412	-	ELM99522412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522413	-	ELM99522413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522421	-	ELM99522421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522422	-	ELM99522422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522423	-	ELM99522423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522431	-	ELM99522431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522432	-	ELM99522432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522433	-	ELM99522433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522441	-	ELM99522441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522442	-	ELM99522442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522443	-	ELM99522443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522451	-	ELM99522451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522452	-	ELM99522452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522453	-	ELM99522453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522461	-	ELM99522461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522462	-	ELM99522462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522463	-	ELM99522463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522471	-	ELM99522471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522472	-	ELM99522472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522473	-	ELM99522473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522481	-	ELM99522481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522482	-	ELM99522482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522483	-	ELM99522483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522491	-	ELM99522491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522492	-	ELM99522492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522493	-	ELM99522493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522501	-	ELM99522501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522502	-	ELM99522502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522503	-	ELM99522503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522511	-	ELM99522511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522512	-	ELM99522512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522513	-	ELM99522513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522521	-	ELM99522521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522522	-	ELM99522522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522523	-	ELM99522523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522531	-	ELM99522531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522532	-	ELM99522532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99522533	-	ELM99522533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522541	-	ELM99522541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522542	-	ELM99522542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522543	-	ELM99522543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522551	-	ELM99522551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522552	-	ELM99522552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522553	-	ELM99522553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522561	-	ELM99522561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522562	-	ELM99522562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522563	-	ELM99522563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522571	-	ELM99522571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522572	-	ELM99522572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522573	-	ELM99522573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522581	-	ELM99522581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522582	-	ELM99522582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522583	-	ELM99522583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522591	-	ELM99522591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522592	-	ELM99522592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522593	-	ELM99522593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99522601	-	ELM99522601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99522602	-	ELM99522602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99522603	-	ELM99522603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523181	-	ELM99523181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523182	-	ELM99523182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523183	-	ELM99523183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523191	-	ELM99523191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523192	-	ELM99523192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523193	-	ELM99523193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523201	-	ELM99523201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523202	-	ELM99523202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523203	-	ELM99523203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523211	-	ELM99523211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523212	-	ELM99523212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523213	-	ELM99523213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523221	-	ELM99523221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523222	-	ELM99523222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523223	-	ELM99523223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523231	-	ELM99523231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523232	-	ELM99523232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523233	-	ELM99523233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523241	-	ELM99523241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523242	-	ELM99523242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523243	-	ELM99523243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523251	-	ELM99523251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523252	-	ELM99523252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523253	-	ELM99523253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523261	-	ELM99523261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523262	-	ELM99523262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523263	-	ELM99523263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523271	-	ELM99523271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523272	-	ELM99523272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523273	-	ELM99523273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523281	-	ELM99523281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523282	-	ELM99523282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523283	-	ELM99523283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523291	-	ELM99523291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523292	-	ELM99523292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523293	-	ELM99523293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523301	-	ELM99523301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523302	-	ELM99523302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523303	-	ELM99523303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523311	-	ELM99523311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523312	-	ELM99523312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523313	-	ELM99523313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523321	-	ELM99523321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523322	-	ELM99523322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523323	-	ELM99523323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523331	-	ELM99523331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523332	-	ELM99523332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523333	-	ELM99523333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99523341	-	ELM99523341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523342	-	ELM99523342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523343	-	ELM99523343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523351	-	ELM99523351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523352	-	ELM99523352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523353	-	ELM99523353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523361	-	ELM99523361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523362	-	ELM99523362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523363	-	ELM99523363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523371	-	ELM99523371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523372	-	ELM99523372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523373	-	ELM99523373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523381	-	ELM99523381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523382	-	ELM99523382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523383	-	ELM99523383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523391	-	ELM99523391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523392	-	ELM99523392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523393	-	ELM99523393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523401	-	ELM99523401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523402	-	ELM99523402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523403	-	ELM99523403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523411	-	ELM99523411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523412	-	ELM99523412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523413	-	ELM99523413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523421	-	ELM99523421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523422	-	ELM99523422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523423	-	ELM99523423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523431	-	ELM99523431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523432	-	ELM99523432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523433	-	ELM99523433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523441	-	ELM99523441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523442	-	ELM99523442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523443	-	ELM99523443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523451	-	ELM99523451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523452	-	ELM99523452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523453	-	ELM99523453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523461	-	ELM99523461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523462	-	ELM99523462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523463	-	ELM99523463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523471	-	ELM99523471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523472	-	ELM99523472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523473	-	ELM99523473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523481	-	ELM99523481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523482	-	ELM99523482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523483	-	ELM99523483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523491	-	ELM99523491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523492	-	ELM99523492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523493	-	ELM99523493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523501	-	ELM99523501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523502	-	ELM99523502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523503	-	ELM99523503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523511	-	ELM99523511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523512	-	ELM99523512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523513	-	ELM99523513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523521	-	ELM99523521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523522	-	ELM99523522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523523	-	ELM99523523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523531	-	ELM99523531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523532	-	ELM99523532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523533	-	ELM99523533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523541	-	ELM99523541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523542	-	ELM99523542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523543	-	ELM99523543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523551	-	ELM99523551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523552	-	ELM99523552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523553	-	ELM99523553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523561	-	ELM99523561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523562	-	ELM99523562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523563	-	ELM99523563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523571	-	ELM99523571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99523572	-	ELM99523572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523573	-	ELM99523573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523581	-	ELM99523581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523582	-	ELM99523582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523583	-	ELM99523583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523591	-	ELM99523591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523592	-	ELM99523592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523593	-	ELM99523593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99523601	-	ELM99523601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99523602	-	ELM99523602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99523603	-	ELM99523603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.2V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99531181	-	ELM99531181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531182	-	ELM99531182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531183	-	ELM99531183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531191	-	ELM99531191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531192	-	ELM99531192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531193	-	ELM99531193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531201	-	ELM99531201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531202	-	ELM99531202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531203	-	ELM99531203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531211	-	ELM99531211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531212	-	ELM99531212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531213	-	ELM99531213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531221	-	ELM99531221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531222	-	ELM99531222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531223	-	ELM99531223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531231	-	ELM99531231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531232	-	ELM99531232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531233	-	ELM99531233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531241	-	ELM99531241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531242	-	ELM99531242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531243	-	ELM99531243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531251	-	ELM99531251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531252	-	ELM99531252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531253	-	ELM99531253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531261	-	ELM99531261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531262	-	ELM99531262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531263	-	ELM99531263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531271	-	ELM99531271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531272	-	ELM99531272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531273	-	ELM99531273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531281	-	ELM99531281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531282	-	ELM99531282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531283	-	ELM99531283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531291	-	ELM99531291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531292	-	ELM99531292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531293	-	ELM99531293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531301	-	ELM99531301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531302	-	ELM99531302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531303	-	ELM99531303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531311	-	ELM99531311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531312	-	ELM99531312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531313	-	ELM99531313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531321	-	ELM99531321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531322	-	ELM99531322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531323	-	ELM99531323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531331	-	ELM99531331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531332	-	ELM99531332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531333	-	ELM99531333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531341	-	ELM99531341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531342	-	ELM99531342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531343	-	ELM99531343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531351	-	ELM99531351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531352	-	ELM99531352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531353	-	ELM99531353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531361	-	ELM99531361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531362	-	ELM99531362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531363	-	ELM99531363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531371	-	ELM99531371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531372	-	ELM99531372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99531373	-	ELM99531373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531381	-	ELM99531381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531382	-	ELM99531382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531383	-	ELM99531383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531391	-	ELM99531391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531392	-	ELM99531392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531393	-	ELM99531393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531401	-	ELM99531401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531402	-	ELM99531402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531403	-	ELM99531403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531411	-	ELM99531411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531412	-	ELM99531412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531413	-	ELM99531413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531421	-	ELM99531421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531422	-	ELM99531422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531423	-	ELM99531423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531431	-	ELM99531431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531432	-	ELM99531432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531433	-	ELM99531433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531441	-	ELM99531441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531442	-	ELM99531442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531443	-	ELM99531443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531451	-	ELM99531451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531452	-	ELM99531452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531453	-	ELM99531453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531461	-	ELM99531461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531462	-	ELM99531462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531463	-	ELM99531463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531471	-	ELM99531471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531472	-	ELM99531472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531473	-	ELM99531473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531481	-	ELM99531481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531482	-	ELM99531482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531483	-	ELM99531483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531491	-	ELM99531491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531492	-	ELM99531492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531493	-	ELM99531493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531501	-	ELM99531501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531502	-	ELM99531502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531503	-	ELM99531503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531511	-	ELM99531511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531512	-	ELM99531512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531513	-	ELM99531513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531521	-	ELM99531521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531522	-	ELM99531522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531523	-	ELM99531523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531531	-	ELM99531531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531532	-	ELM99531532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531533	-	ELM99531533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531541	-	ELM99531541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531542	-	ELM99531542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531543	-	ELM99531543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531551	-	ELM99531551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531552	-	ELM99531552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531553	-	ELM99531553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531561	-	ELM99531561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531562	-	ELM99531562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531563	-	ELM99531563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531571	-	ELM99531571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531572	-	ELM99531572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531573	-	ELM99531573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531581	-	ELM99531581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531582	-	ELM99531582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531583	-	ELM99531583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531591	-	ELM99531591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531592	-	ELM99531592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531593	-	ELM99531593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99531601	-	ELM99531601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99531602	-	ELM99531602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99531603	-	ELM99531603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99532181	-	ELM99532181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532182	-	ELM99532182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532183	-	ELM99532183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532191	-	ELM99532191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532192	-	ELM99532192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532193	-	ELM99532193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532201	-	ELM99532201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532202	-	ELM99532202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532203	-	ELM99532203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532211	-	ELM99532211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532212	-	ELM99532212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532213	-	ELM99532213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532221	-	ELM99532221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532222	-	ELM99532222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532223	-	ELM99532223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532231	-	ELM99532231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532232	-	ELM99532232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532233	-	ELM99532233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532241	-	ELM99532241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532242	-	ELM99532242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532243	-	ELM99532243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532251	-	ELM99532251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532252	-	ELM99532252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532253	-	ELM99532253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532261	-	ELM99532261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532262	-	ELM99532262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532263	-	ELM99532263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532271	-	ELM99532271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532272	-	ELM99532272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532273	-	ELM99532273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532281	-	ELM99532281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532282	-	ELM99532282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532283	-	ELM99532283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532291	-	ELM99532291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532292	-	ELM99532292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532293	-	ELM99532293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532301	-	ELM99532301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532302	-	ELM99532302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532303	-	ELM99532303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532311	-	ELM99532311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532312	-	ELM99532312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532313	-	ELM99532313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532321	-	ELM99532321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532322	-	ELM99532322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532323	-	ELM99532323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532331	-	ELM99532331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532332	-	ELM99532332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532333	-	ELM99532333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532341	-	ELM99532341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532342	-	ELM99532342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532343	-	ELM99532343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532351	-	ELM99532351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532352	-	ELM99532352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532353	-	ELM99532353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532361	-	ELM99532361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532362	-	ELM99532362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532363	-	ELM99532363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532371	-	ELM99532371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532372	-	ELM99532372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532373	-	ELM99532373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532381	-	ELM99532381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532382	-	ELM99532382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532383	-	ELM99532383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532391	-	ELM99532391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532392	-	ELM99532392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532393	-	ELM99532393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532401	-	ELM99532401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532402	-	ELM99532402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532403	-	ELM99532403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532411	-	ELM99532411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99532412	-	ELM99532412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532413	-	ELM99532413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532421	-	ELM99532421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532422	-	ELM99532422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532423	-	ELM99532423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532431	-	ELM99532431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532432	-	ELM99532432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532433	-	ELM99532433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532441	-	ELM99532441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532442	-	ELM99532442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532443	-	ELM99532443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532451	-	ELM99532451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532452	-	ELM99532452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532453	-	ELM99532453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532461	-	ELM99532461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532462	-	ELM99532462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532463	-	ELM99532463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532471	-	ELM99532471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532472	-	ELM99532472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532473	-	ELM99532473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532481	-	ELM99532481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532482	-	ELM99532482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532483	-	ELM99532483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532491	-	ELM99532491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532492	-	ELM99532492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532493	-	ELM99532493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532501	-	ELM99532501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532502	-	ELM99532502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532503	-	ELM99532503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532511	-	ELM99532511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532512	-	ELM99532512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532513	-	ELM99532513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532521	-	ELM99532521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532522	-	ELM99532522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532523	-	ELM99532523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532531	-	ELM99532531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532532	-	ELM99532532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532533	-	ELM99532533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532541	-	ELM99532541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532542	-	ELM99532542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532543	-	ELM99532543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532551	-	ELM99532551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532552	-	ELM99532552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532553	-	ELM99532553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532561	-	ELM99532561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532562	-	ELM99532562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532563	-	ELM99532563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532571	-	ELM99532571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532572	-	ELM99532572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532573	-	ELM99532573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532581	-	ELM99532581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532582	-	ELM99532582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532583	-	ELM99532583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532591	-	ELM99532591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532592	-	ELM99532592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532593	-	ELM99532593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99532601	-	ELM99532601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99532602	-	ELM99532602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99532603	-	ELM99532603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533181	-	ELM99533181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533182	-	ELM99533182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533183	-	ELM99533183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533191	-	ELM99533191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533192	-	ELM99533192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533193	-	ELM99533193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533201	-	ELM99533201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533202	-	ELM99533202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533203	-	ELM99533203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533211	-	ELM99533211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533212	-	ELM99533212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99533213	-	ELM99533213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533221	-	ELM99533221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533222	-	ELM99533222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533223	-	ELM99533223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533231	-	ELM99533231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533232	-	ELM99533232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533233	-	ELM99533233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533241	-	ELM99533241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533242	-	ELM99533242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533243	-	ELM99533243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533251	-	ELM99533251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533252	-	ELM99533252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533253	-	ELM99533253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533261	-	ELM99533261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533262	-	ELM99533262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533263	-	ELM99533263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533271	-	ELM99533271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533272	-	ELM99533272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533273	-	ELM99533273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533281	-	ELM99533281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533282	-	ELM99533282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533283	-	ELM99533283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533291	-	ELM99533291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533292	-	ELM99533292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533293	-	ELM99533293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533301	-	ELM99533301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533302	-	ELM99533302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533303	-	ELM99533303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533311	-	ELM99533311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533312	-	ELM99533312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533313	-	ELM99533313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533321	-	ELM99533321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533322	-	ELM99533322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533323	-	ELM99533323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533331	-	ELM99533331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533332	-	ELM99533332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533333	-	ELM99533333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533341	-	ELM99533341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533342	-	ELM99533342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533343	-	ELM99533343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533351	-	ELM99533351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533352	-	ELM99533352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533353	-	ELM99533353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533361	-	ELM99533361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533362	-	ELM99533362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533363	-	ELM99533363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533371	-	ELM99533371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533372	-	ELM99533372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533373	-	ELM99533373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533381	-	ELM99533381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533382	-	ELM99533382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533383	-	ELM99533383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533391	-	ELM99533391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533392	-	ELM99533392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533393	-	ELM99533393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533401	-	ELM99533401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533402	-	ELM99533402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533403	-	ELM99533403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533411	-	ELM99533411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533412	-	ELM99533412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533413	-	ELM99533413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533421	-	ELM99533421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533422	-	ELM99533422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533423	-	ELM99533423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533431	-	ELM99533431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533432	-	ELM99533432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533433	-	ELM99533433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533441	-	ELM99533441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533442	-	ELM99533442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533443	-	ELM99533443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99533451	-	ELM99533451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533452	-	ELM99533452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533453	-	ELM99533453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533461	-	ELM99533461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533462	-	ELM99533462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533463	-	ELM99533463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533471	-	ELM99533471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533472	-	ELM99533472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533473	-	ELM99533473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533481	-	ELM99533481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533482	-	ELM99533482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533483	-	ELM99533483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533491	-	ELM99533491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533492	-	ELM99533492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533493	-	ELM99533493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533501	-	ELM99533501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533502	-	ELM99533502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533503	-	ELM99533503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533511	-	ELM99533511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533512	-	ELM99533512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533513	-	ELM99533513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533521	-	ELM99533521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533522	-	ELM99533522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533523	-	ELM99533523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533531	-	ELM99533531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533532	-	ELM99533532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533533	-	ELM99533533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533541	-	ELM99533541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533542	-	ELM99533542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533543	-	ELM99533543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533551	-	ELM99533551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533552	-	ELM99533552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533553	-	ELM99533553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533561	-	ELM99533561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533562	-	ELM99533562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533563	-	ELM99533563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533571	-	ELM99533571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533572	-	ELM99533572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533573	-	ELM99533573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533581	-	ELM99533581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533582	-	ELM99533582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533583	-	ELM99533583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533591	-	ELM99533591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533592	-	ELM99533592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533593	-	ELM99533593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99533601	-	ELM99533601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99533602	-	ELM99533602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99533603	-	ELM99533603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.3V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99541181	-	ELM99541181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541182	-	ELM99541182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541183	-	ELM99541183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541191	-	ELM99541191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541192	-	ELM99541192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541193	-	ELM99541193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541201	-	ELM99541201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541202	-	ELM99541202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541203	-	ELM99541203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541211	-	ELM99541211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541212	-	ELM99541212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541213	-	ELM99541213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541221	-	ELM99541221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541222	-	ELM99541222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541223	-	ELM99541223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541231	-	ELM99541231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541232	-	ELM99541232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541233	-	ELM99541233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541241	-	ELM99541241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541242	-	ELM99541242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541243	-	ELM99541243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541251	-	ELM99541251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99541252	-	ELM99541252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541253	-	ELM99541253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541261	-	ELM99541261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541262	-	ELM99541262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541263	-	ELM99541263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541271	-	ELM99541271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541272	-	ELM99541272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541273	-	ELM99541273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541281	-	ELM99541281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541282	-	ELM99541282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541283	-	ELM99541283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541291	-	ELM99541291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541292	-	ELM99541292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541293	-	ELM99541293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541301	-	ELM99541301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541302	-	ELM99541302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541303	-	ELM99541303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541311	-	ELM99541311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541312	-	ELM99541312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541313	-	ELM99541313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541321	-	ELM99541321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541322	-	ELM99541322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541323	-	ELM99541323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541331	-	ELM99541331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541332	-	ELM99541332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541333	-	ELM99541333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541341	-	ELM99541341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541342	-	ELM99541342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541343	-	ELM99541343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541351	-	ELM99541351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541352	-	ELM99541352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541353	-	ELM99541353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541361	-	ELM99541361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541362	-	ELM99541362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541363	-	ELM99541363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541371	-	ELM99541371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541372	-	ELM99541372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541373	-	ELM99541373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541381	-	ELM99541381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541382	-	ELM99541382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541383	-	ELM99541383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541391	-	ELM99541391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541392	-	ELM99541392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541393	-	ELM99541393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541401	-	ELM99541401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541402	-	ELM99541402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541403	-	ELM99541403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541411	-	ELM99541411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541412	-	ELM99541412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541413	-	ELM99541413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541421	-	ELM99541421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541422	-	ELM99541422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541423	-	ELM99541423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541431	-	ELM99541431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541432	-	ELM99541432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541433	-	ELM99541433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541441	-	ELM99541441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541442	-	ELM99541442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541443	-	ELM99541443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541451	-	ELM99541451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541452	-	ELM99541452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541453	-	ELM99541453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541461	-	ELM99541461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541462	-	ELM99541462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541463	-	ELM99541463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541471	-	ELM99541471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541472	-	ELM99541472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541473	-	ELM99541473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541481	-	ELM99541481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541482	-	ELM99541482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99541483	-	ELM99541483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541491	-	ELM99541491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541492	-	ELM99541492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541493	-	ELM99541493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541501	-	ELM99541501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541502	-	ELM99541502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541503	-	ELM99541503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541511	-	ELM99541511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541512	-	ELM99541512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541513	-	ELM99541513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541521	-	ELM99541521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541522	-	ELM99541522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541523	-	ELM99541523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541531	-	ELM99541531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541532	-	ELM99541532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541533	-	ELM99541533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541541	-	ELM99541541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541542	-	ELM99541542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541543	-	ELM99541543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541551	-	ELM99541551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541552	-	ELM99541552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541553	-	ELM99541553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541561	-	ELM99541561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541562	-	ELM99541562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541563	-	ELM99541563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541571	-	ELM99541571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541572	-	ELM99541572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541573	-	ELM99541573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541581	-	ELM99541581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541582	-	ELM99541582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541583	-	ELM99541583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541591	-	ELM99541591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541592	-	ELM99541592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541593	-	ELM99541593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99541601	-	ELM99541601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99541602	-	ELM99541602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99541603	-	ELM99541603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99542181	-	ELM99542181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542182	-	ELM99542182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542183	-	ELM99542183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542191	-	ELM99542191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542192	-	ELM99542192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542193	-	ELM99542193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542201	-	ELM99542201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542202	-	ELM99542202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542203	-	ELM99542203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542211	-	ELM99542211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542212	-	ELM99542212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542213	-	ELM99542213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542221	-	ELM99542221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542222	-	ELM99542222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542223	-	ELM99542223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542231	-	ELM99542231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542232	-	ELM99542232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542233	-	ELM99542233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542241	-	ELM99542241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542242	-	ELM99542242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542243	-	ELM99542243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542251	-	ELM99542251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542252	-	ELM99542252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542253	-	ELM99542253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542261	-	ELM99542261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542262	-	ELM99542262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542263	-	ELM99542263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542271	-	ELM99542271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542272	-	ELM99542272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542273	-	ELM99542273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542281	-	ELM99542281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542282	-	ELM99542282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542283	-	ELM99542283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99542291	-	ELM99542291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542292	-	ELM99542292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542293	-	ELM99542293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542301	-	ELM99542301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542302	-	ELM99542302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542303	-	ELM99542303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542311	-	ELM99542311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542312	-	ELM99542312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542313	-	ELM99542313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542321	-	ELM99542321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542322	-	ELM99542322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542323	-	ELM99542323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542331	-	ELM99542331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542332	-	ELM99542332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542333	-	ELM99542333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542341	-	ELM99542341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542342	-	ELM99542342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542343	-	ELM99542343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542351	-	ELM99542351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542352	-	ELM99542352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542353	-	ELM99542353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542361	-	ELM99542361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542362	-	ELM99542362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542363	-	ELM99542363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542371	-	ELM99542371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542372	-	ELM99542372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542373	-	ELM99542373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542381	-	ELM99542381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542382	-	ELM99542382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542383	-	ELM99542383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542391	-	ELM99542391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542392	-	ELM99542392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542393	-	ELM99542393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542401	-	ELM99542401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542402	-	ELM99542402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542403	-	ELM99542403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542411	-	ELM99542411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542412	-	ELM99542412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542413	-	ELM99542413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542421	-	ELM99542421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542422	-	ELM99542422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542423	-	ELM99542423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542431	-	ELM99542431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542432	-	ELM99542432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542433	-	ELM99542433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542441	-	ELM99542441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542442	-	ELM99542442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542443	-	ELM99542443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542451	-	ELM99542451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542452	-	ELM99542452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542453	-	ELM99542453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542461	-	ELM99542461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542462	-	ELM99542462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542463	-	ELM99542463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542471	-	ELM99542471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542472	-	ELM99542472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542473	-	ELM99542473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542481	-	ELM99542481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542482	-	ELM99542482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542483	-	ELM99542483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542491	-	ELM99542491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542492	-	ELM99542492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542493	-	ELM99542493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542501	-	ELM99542501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542502	-	ELM99542502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542503	-	ELM99542503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542511	-	ELM99542511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542512	-	ELM99542512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542513	-	ELM99542513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542521	-	ELM99542521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99542522	-	ELM99542522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542523	-	ELM99542523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542531	-	ELM99542531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542532	-	ELM99542532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542533	-	ELM99542533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542541	-	ELM99542541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542542	-	ELM99542542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542543	-	ELM99542543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542551	-	ELM99542551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542552	-	ELM99542552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542553	-	ELM99542553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542561	-	ELM99542561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542562	-	ELM99542562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542563	-	ELM99542563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542571	-	ELM99542571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542572	-	ELM99542572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542573	-	ELM99542573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542581	-	ELM99542581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542582	-	ELM99542582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542583	-	ELM99542583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542591	-	ELM99542591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542592	-	ELM99542592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542593	-	ELM99542593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99542601	-	ELM99542601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99542602	-	ELM99542602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99542603	-	ELM99542603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543181	-	ELM99543181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543182	-	ELM99543182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543183	-	ELM99543183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543191	-	ELM99543191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543192	-	ELM99543192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543193	-	ELM99543193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543201	-	ELM99543201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543202	-	ELM99543202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543203	-	ELM99543203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543211	-	ELM99543211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543212	-	ELM99543212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543213	-	ELM99543213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543221	-	ELM99543221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543222	-	ELM99543222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543223	-	ELM99543223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543231	-	ELM99543231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543232	-	ELM99543232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543233	-	ELM99543233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543241	-	ELM99543241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543242	-	ELM99543242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543243	-	ELM99543243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543251	-	ELM99543251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543252	-	ELM99543252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543253	-	ELM99543253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543261	-	ELM99543261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543262	-	ELM99543262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543263	-	ELM99543263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543271	-	ELM99543271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543272	-	ELM99543272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543273	-	ELM99543273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543281	-	ELM99543281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543282	-	ELM99543282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543283	-	ELM99543283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543291	-	ELM99543291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543292	-	ELM99543292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543293	-	ELM99543293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543301	-	ELM99543301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543302	-	ELM99543302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543303	-	ELM99543303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543311	-	ELM99543311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543312	-	ELM99543312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543313	-	ELM99543313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543321	-	ELM99543321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543322	-	ELM99543322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99543323	-	ELM99543323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543331	-	ELM99543331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543332	-	ELM99543332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543333	-	ELM99543333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543341	-	ELM99543341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543342	-	ELM99543342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543343	-	ELM99543343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543351	-	ELM99543351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543352	-	ELM99543352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543353	-	ELM99543353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543361	-	ELM99543361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543362	-	ELM99543362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543363	-	ELM99543363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543371	-	ELM99543371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543372	-	ELM99543372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543373	-	ELM99543373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543381	-	ELM99543381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543382	-	ELM99543382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543383	-	ELM99543383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543391	-	ELM99543391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543392	-	ELM99543392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543393	-	ELM99543393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543401	-	ELM99543401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543402	-	ELM99543402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543403	-	ELM99543403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543411	-	ELM99543411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543412	-	ELM99543412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543413	-	ELM99543413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543421	-	ELM99543421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543422	-	ELM99543422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543423	-	ELM99543423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543431	-	ELM99543431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543432	-	ELM99543432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543433	-	ELM99543433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543441	-	ELM99543441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543442	-	ELM99543442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543443	-	ELM99543443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543451	-	ELM99543451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543452	-	ELM99543452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543453	-	ELM99543453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543461	-	ELM99543461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543462	-	ELM99543462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543463	-	ELM99543463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543471	-	ELM99543471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543472	-	ELM99543472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543473	-	ELM99543473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543481	-	ELM99543481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543482	-	ELM99543482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543483	-	ELM99543483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543491	-	ELM99543491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543492	-	ELM99543492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543493	-	ELM99543493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543501	-	ELM99543501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543502	-	ELM99543502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543503	-	ELM99543503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543511	-	ELM99543511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543512	-	ELM99543512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543513	-	ELM99543513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543521	-	ELM99543521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543522	-	ELM99543522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543523	-	ELM99543523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543531	-	ELM99543531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543532	-	ELM99543532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543533	-	ELM99543533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543541	-	ELM99543541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543542	-	ELM99543542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543543	-	ELM99543543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543551	-	ELM99543551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543552	-	ELM99543552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543553	-	ELM99543553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99543561	-	ELM99543561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543562	-	ELM99543562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543563	-	ELM99543563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543571	-	ELM99543571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543572	-	ELM99543572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543573	-	ELM99543573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543581	-	ELM99543581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543582	-	ELM99543582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543583	-	ELM99543583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543591	-	ELM99543591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543592	-	ELM99543592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543593	-	ELM99543593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99543601	-	ELM99543601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99543602	-	ELM99543602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99543603	-	ELM99543603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.4V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99551181	-	ELM99551181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551182	-	ELM99551182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551183	-	ELM99551183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551191	-	ELM99551191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551192	-	ELM99551192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551193	-	ELM99551193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551201	-	ELM99551201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551202	-	ELM99551202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551203	-	ELM99551203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551211	-	ELM99551211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551212	-	ELM99551212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551213	-	ELM99551213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551221	-	ELM99551221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551222	-	ELM99551222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551223	-	ELM99551223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551231	-	ELM99551231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551232	-	ELM99551232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551233	-	ELM99551233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551241	-	ELM99551241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551242	-	ELM99551242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551243	-	ELM99551243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551251	-	ELM99551251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551252	-	ELM99551252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551253	-	ELM99551253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551261	-	ELM99551261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551262	-	ELM99551262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551263	-	ELM99551263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551271	-	ELM99551271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551272	-	ELM99551272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551273	-	ELM99551273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551281	-	ELM99551281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551282	-	ELM99551282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551283	-	ELM99551283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551291	-	ELM99551291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551292	-	ELM99551292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551293	-	ELM99551293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551301	-	ELM99551301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551302	-	ELM99551302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551303	-	ELM99551303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551311	-	ELM99551311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551312	-	ELM99551312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551313	-	ELM99551313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551321	-	ELM99551321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551322	-	ELM99551322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551323	-	ELM99551323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551331	-	ELM99551331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551332	-	ELM99551332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551333	-	ELM99551333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551341	-	ELM99551341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551342	-	ELM99551342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551343	-	ELM99551343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551351	-	ELM99551351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551352	-	ELM99551352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551353	-	ELM99551353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551361	-	ELM99551361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99551362	-	ELM99551362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551363	-	ELM99551363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551371	-	ELM99551371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551372	-	ELM99551372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551373	-	ELM99551373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551381	-	ELM99551381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551382	-	ELM99551382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551383	-	ELM99551383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551391	-	ELM99551391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551392	-	ELM99551392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551393	-	ELM99551393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551401	-	ELM99551401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551402	-	ELM99551402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551403	-	ELM99551403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551411	-	ELM99551411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551412	-	ELM99551412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551413	-	ELM99551413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551421	-	ELM99551421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551422	-	ELM99551422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551423	-	ELM99551423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551431	-	ELM99551431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551432	-	ELM99551432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551433	-	ELM99551433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551441	-	ELM99551441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551442	-	ELM99551442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551443	-	ELM99551443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551451	-	ELM99551451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551452	-	ELM99551452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551453	-	ELM99551453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551461	-	ELM99551461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551462	-	ELM99551462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551463	-	ELM99551463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551471	-	ELM99551471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551472	-	ELM99551472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551473	-	ELM99551473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551481	-	ELM99551481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551482	-	ELM99551482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551483	-	ELM99551483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551491	-	ELM99551491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551492	-	ELM99551492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551493	-	ELM99551493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551501	-	ELM99551501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551502	-	ELM99551502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551503	-	ELM99551503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551511	-	ELM99551511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551512	-	ELM99551512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551513	-	ELM99551513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551521	-	ELM99551521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551522	-	ELM99551522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551523	-	ELM99551523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551531	-	ELM99551531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551532	-	ELM99551532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551533	-	ELM99551533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551541	-	ELM99551541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551542	-	ELM99551542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551543	-	ELM99551543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551551	-	ELM99551551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551552	-	ELM99551552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551553	-	ELM99551553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551561	-	ELM99551561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551562	-	ELM99551562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551563	-	ELM99551563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551571	-	ELM99551571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551572	-	ELM99551572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551573	-	ELM99551573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551581	-	ELM99551581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551582	-	ELM99551582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551583	-	ELM99551583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551591	-	ELM99551591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551592	-	ELM99551592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99551593	-	ELM99551593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99551601	-	ELM99551601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99551602	-	ELM99551602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99551603	-	ELM99551603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99552181	-	ELM99552181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552182	-	ELM99552182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552183	-	ELM99552183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552191	-	ELM99552191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552192	-	ELM99552192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552193	-	ELM99552193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552201	-	ELM99552201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552202	-	ELM99552202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552203	-	ELM99552203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552211	-	ELM99552211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552212	-	ELM99552212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552213	-	ELM99552213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552221	-	ELM99552221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552222	-	ELM99552222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552223	-	ELM99552223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552231	-	ELM99552231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552232	-	ELM99552232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552233	-	ELM99552233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552241	-	ELM99552241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552242	-	ELM99552242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552243	-	ELM99552243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552251	-	ELM99552251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552252	-	ELM99552252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552253	-	ELM99552253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552261	-	ELM99552261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552262	-	ELM99552262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552263	-	ELM99552263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552271	-	ELM99552271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552272	-	ELM99552272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552273	-	ELM99552273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552281	-	ELM99552281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552282	-	ELM99552282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552283	-	ELM99552283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552291	-	ELM99552291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552292	-	ELM99552292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552293	-	ELM99552293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552301	-	ELM99552301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552302	-	ELM99552302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552303	-	ELM99552303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552311	-	ELM99552311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552312	-	ELM99552312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552313	-	ELM99552313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552321	-	ELM99552321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552322	-	ELM99552322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552323	-	ELM99552323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552331	-	ELM99552331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552332	-	ELM99552332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552333	-	ELM99552333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552341	-	ELM99552341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552342	-	ELM99552342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552343	-	ELM99552343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552351	-	ELM99552351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552352	-	ELM99552352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552353	-	ELM99552353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552361	-	ELM99552361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552362	-	ELM99552362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552363	-	ELM99552363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552371	-	ELM99552371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552372	-	ELM99552372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552373	-	ELM99552373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552381	-	ELM99552381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552382	-	ELM99552382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552383	-	ELM99552383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552391	-	ELM99552391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552392	-	ELM99552392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552393	-	ELM99552393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99552401	-	ELM99552401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552402	-	ELM99552402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552403	-	ELM99552403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552411	-	ELM99552411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552412	-	ELM99552412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552413	-	ELM99552413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552421	-	ELM99552421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552422	-	ELM99552422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552423	-	ELM99552423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552431	-	ELM99552431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552432	-	ELM99552432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552433	-	ELM99552433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552441	-	ELM99552441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552442	-	ELM99552442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552443	-	ELM99552443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552451	-	ELM99552451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552452	-	ELM99552452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552453	-	ELM99552453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552461	-	ELM99552461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552462	-	ELM99552462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552463	-	ELM99552463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552471	-	ELM99552471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552472	-	ELM99552472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552473	-	ELM99552473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552481	-	ELM99552481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552482	-	ELM99552482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552483	-	ELM99552483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552491	-	ELM99552491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552492	-	ELM99552492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552493	-	ELM99552493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552501	-	ELM99552501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552502	-	ELM99552502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552503	-	ELM99552503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552511	-	ELM99552511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552512	-	ELM99552512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552513	-	ELM99552513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552521	-	ELM99552521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552522	-	ELM99552522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552523	-	ELM99552523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552531	-	ELM99552531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552532	-	ELM99552532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552533	-	ELM99552533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552541	-	ELM99552541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552542	-	ELM99552542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552543	-	ELM99552543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552551	-	ELM99552551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552552	-	ELM99552552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552553	-	ELM99552553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552561	-	ELM99552561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552562	-	ELM99552562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552563	-	ELM99552563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552571	-	ELM99552571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552572	-	ELM99552572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552573	-	ELM99552573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552581	-	ELM99552581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552582	-	ELM99552582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552583	-	ELM99552583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552591	-	ELM99552591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552592	-	ELM99552592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552593	-	ELM99552593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99552601	-	ELM99552601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99552602	-	ELM99552602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99552603	-	ELM99552603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553181	-	ELM99553181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553182	-	ELM99553182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553183	-	ELM99553183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553191	-	ELM99553191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553192	-	ELM99553192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553193	-	ELM99553193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553201	-	ELM99553201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99553202	-	ELM99553202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553203	-	ELM99553203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553211	-	ELM99553211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553212	-	ELM99553212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553213	-	ELM99553213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553221	-	ELM99553221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553222	-	ELM99553222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553223	-	ELM99553223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553231	-	ELM99553231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553232	-	ELM99553232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553233	-	ELM99553233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553241	-	ELM99553241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553242	-	ELM99553242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553243	-	ELM99553243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553251	-	ELM99553251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553252	-	ELM99553252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553253	-	ELM99553253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553261	-	ELM99553261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553262	-	ELM99553262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553263	-	ELM99553263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553271	-	ELM99553271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553272	-	ELM99553272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553273	-	ELM99553273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553281	-	ELM99553281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553282	-	ELM99553282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553283	-	ELM99553283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553291	-	ELM99553291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553292	-	ELM99553292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553293	-	ELM99553293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553301	-	ELM99553301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553302	-	ELM99553302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553303	-	ELM99553303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553311	-	ELM99553311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553312	-	ELM99553312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553313	-	ELM99553313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553321	-	ELM99553321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553322	-	ELM99553322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553323	-	ELM99553323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553331	-	ELM99553331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553332	-	ELM99553332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553333	-	ELM99553333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553341	-	ELM99553341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553342	-	ELM99553342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553343	-	ELM99553343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553351	-	ELM99553351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553352	-	ELM99553352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553353	-	ELM99553353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553361	-	ELM99553361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553362	-	ELM99553362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553363	-	ELM99553363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553371	-	ELM99553371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553372	-	ELM99553372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553373	-	ELM99553373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553381	-	ELM99553381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553382	-	ELM99553382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553383	-	ELM99553383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553391	-	ELM99553391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553392	-	ELM99553392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553393	-	ELM99553393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553401	-	ELM99553401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553402	-	ELM99553402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553403	-	ELM99553403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553411	-	ELM99553411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553412	-	ELM99553412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553413	-	ELM99553413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553421	-	ELM99553421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553422	-	ELM99553422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553423	-	ELM99553423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553431	-	ELM99553431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553432	-	ELM99553432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99553433	-	ELM99553433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553441	-	ELM99553441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553442	-	ELM99553442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553443	-	ELM99553443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553451	-	ELM99553451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553452	-	ELM99553452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553453	-	ELM99553453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553461	-	ELM99553461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553462	-	ELM99553462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553463	-	ELM99553463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553471	-	ELM99553471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553472	-	ELM99553472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553473	-	ELM99553473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553481	-	ELM99553481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553482	-	ELM99553482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553483	-	ELM99553483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553491	-	ELM99553491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553492	-	ELM99553492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553493	-	ELM99553493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553501	-	ELM99553501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553502	-	ELM99553502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553503	-	ELM99553503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553511	-	ELM99553511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553512	-	ELM99553512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553513	-	ELM99553513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553521	-	ELM99553521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553522	-	ELM99553522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553523	-	ELM99553523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553531	-	ELM99553531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553532	-	ELM99553532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553533	-	ELM99553533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553541	-	ELM99553541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553542	-	ELM99553542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553543	-	ELM99553543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553551	-	ELM99553551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553552	-	ELM99553552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553553	-	ELM99553553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553561	-	ELM99553561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553562	-	ELM99553562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553563	-	ELM99553563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553571	-	ELM99553571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553572	-	ELM99553572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553573	-	ELM99553573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553581	-	ELM99553581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553582	-	ELM99553582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553583	-	ELM99553583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553591	-	ELM99553591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553592	-	ELM99553592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553593	-	ELM99553593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99553601	-	ELM99553601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99553602	-	ELM99553602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99553603	-	ELM99553603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.5V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99561181	-	ELM99561181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561182	-	ELM99561182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561183	-	ELM99561183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561191	-	ELM99561191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561192	-	ELM99561192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561193	-	ELM99561193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561201	-	ELM99561201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561202	-	ELM99561202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561203	-	ELM99561203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561211	-	ELM99561211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561212	-	ELM99561212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561213	-	ELM99561213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561221	-	ELM99561221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561222	-	ELM99561222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561223	-	ELM99561223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561231	-	ELM99561231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561232	-	ELM99561232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561233	-	ELM99561233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99561241	-	ELM99561241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561242	-	ELM99561242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561243	-	ELM99561243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561251	-	ELM99561251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561252	-	ELM99561252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561253	-	ELM99561253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561261	-	ELM99561261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561262	-	ELM99561262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561263	-	ELM99561263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561271	-	ELM99561271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561272	-	ELM99561272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561273	-	ELM99561273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561281	-	ELM99561281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561282	-	ELM99561282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561283	-	ELM99561283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561291	-	ELM99561291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561292	-	ELM99561292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561293	-	ELM99561293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561301	-	ELM99561301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561302	-	ELM99561302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561303	-	ELM99561303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561311	-	ELM99561311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561312	-	ELM99561312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561313	-	ELM99561313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561321	-	ELM99561321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561322	-	ELM99561322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561323	-	ELM99561323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561331	-	ELM99561331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561332	-	ELM99561332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561333	-	ELM99561333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561341	-	ELM99561341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561342	-	ELM99561342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561343	-	ELM99561343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561351	-	ELM99561351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561352	-	ELM99561352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561353	-	ELM99561353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561361	-	ELM99561361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561362	-	ELM99561362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561363	-	ELM99561363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561371	-	ELM99561371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561372	-	ELM99561372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561373	-	ELM99561373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561381	-	ELM99561381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561382	-	ELM99561382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561383	-	ELM99561383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561391	-	ELM99561391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561392	-	ELM99561392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561393	-	ELM99561393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561401	-	ELM99561401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561402	-	ELM99561402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561403	-	ELM99561403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561411	-	ELM99561411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561412	-	ELM99561412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561413	-	ELM99561413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561421	-	ELM99561421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561422	-	ELM99561422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561423	-	ELM99561423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561431	-	ELM99561431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561432	-	ELM99561432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561433	-	ELM99561433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561441	-	ELM99561441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561442	-	ELM99561442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561443	-	ELM99561443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561451	-	ELM99561451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561452	-	ELM99561452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561453	-	ELM99561453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561461	-	ELM99561461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561462	-	ELM99561462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561463	-	ELM99561463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561471	-	ELM99561471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99561472	-	ELM99561472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561473	-	ELM99561473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561481	-	ELM99561481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561482	-	ELM99561482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561483	-	ELM99561483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561491	-	ELM99561491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561492	-	ELM99561492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561493	-	ELM99561493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561501	-	ELM99561501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561502	-	ELM99561502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561503	-	ELM99561503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561511	-	ELM99561511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561512	-	ELM99561512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561513	-	ELM99561513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561521	-	ELM99561521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561522	-	ELM99561522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561523	-	ELM99561523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561531	-	ELM99561531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561532	-	ELM99561532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561533	-	ELM99561533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561541	-	ELM99561541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561542	-	ELM99561542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561543	-	ELM99561543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561551	-	ELM99561551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561552	-	ELM99561552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561553	-	ELM99561553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561561	-	ELM99561561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561562	-	ELM99561562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561563	-	ELM99561563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561571	-	ELM99561571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561572	-	ELM99561572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561573	-	ELM99561573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561581	-	ELM99561581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561582	-	ELM99561582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561583	-	ELM99561583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561591	-	ELM99561591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561592	-	ELM99561592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561593	-	ELM99561593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99561601	-	ELM99561601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99561602	-	ELM99561602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99561603	-	ELM99561603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99562181	-	ELM99562181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562182	-	ELM99562182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562183	-	ELM99562183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562191	-	ELM99562191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562192	-	ELM99562192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562193	-	ELM99562193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562201	-	ELM99562201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562202	-	ELM99562202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562203	-	ELM99562203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562211	-	ELM99562211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562212	-	ELM99562212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562213	-	ELM99562213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562221	-	ELM99562221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562222	-	ELM99562222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562223	-	ELM99562223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562231	-	ELM99562231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562232	-	ELM99562232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562233	-	ELM99562233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562241	-	ELM99562241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562242	-	ELM99562242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562243	-	ELM99562243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562251	-	ELM99562251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562252	-	ELM99562252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562253	-	ELM99562253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562261	-	ELM99562261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562262	-	ELM99562262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562263	-	ELM99562263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562271	-	ELM99562271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562272	-	ELM99562272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99562273	-	ELM99562273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562281	-	ELM99562281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562282	-	ELM99562282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562283	-	ELM99562283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562291	-	ELM99562291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562292	-	ELM99562292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562293	-	ELM99562293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562301	-	ELM99562301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562302	-	ELM99562302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562303	-	ELM99562303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562311	-	ELM99562311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562312	-	ELM99562312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562313	-	ELM99562313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562321	-	ELM99562321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562322	-	ELM99562322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562323	-	ELM99562323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562331	-	ELM99562331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562332	-	ELM99562332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562333	-	ELM99562333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562341	-	ELM99562341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562342	-	ELM99562342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562343	-	ELM99562343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562351	-	ELM99562351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562352	-	ELM99562352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562353	-	ELM99562353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562361	-	ELM99562361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562362	-	ELM99562362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562363	-	ELM99562363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562371	-	ELM99562371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562372	-	ELM99562372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562373	-	ELM99562373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562381	-	ELM99562381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562382	-	ELM99562382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562383	-	ELM99562383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562391	-	ELM99562391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562392	-	ELM99562392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562393	-	ELM99562393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562401	-	ELM99562401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562402	-	ELM99562402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562403	-	ELM99562403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562411	-	ELM99562411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562412	-	ELM99562412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562413	-	ELM99562413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562421	-	ELM99562421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562422	-	ELM99562422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562423	-	ELM99562423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562431	-	ELM99562431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562432	-	ELM99562432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562433	-	ELM99562433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562441	-	ELM99562441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562442	-	ELM99562442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562443	-	ELM99562443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562451	-	ELM99562451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562452	-	ELM99562452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562453	-	ELM99562453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562461	-	ELM99562461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562462	-	ELM99562462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562463	-	ELM99562463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562471	-	ELM99562471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562472	-	ELM99562472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562473	-	ELM99562473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562481	-	ELM99562481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562482	-	ELM99562482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562483	-	ELM99562483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562491	-	ELM99562491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562492	-	ELM99562492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562493	-	ELM99562493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562501	-	ELM99562501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562502	-	ELM99562502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562503	-	ELM99562503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99562511	-	ELM99562511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562512	-	ELM99562512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562513	-	ELM99562513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562521	-	ELM99562521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562522	-	ELM99562522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562523	-	ELM99562523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562531	-	ELM99562531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562532	-	ELM99562532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562533	-	ELM99562533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562541	-	ELM99562541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562542	-	ELM99562542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562543	-	ELM99562543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562551	-	ELM99562551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562552	-	ELM99562552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562553	-	ELM99562553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562561	-	ELM99562561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562562	-	ELM99562562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562563	-	ELM99562563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562571	-	ELM99562571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562572	-	ELM99562572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562573	-	ELM99562573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562581	-	ELM99562581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562582	-	ELM99562582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562583	-	ELM99562583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562591	-	ELM99562591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562592	-	ELM99562592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562593	-	ELM99562593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99562601	-	ELM99562601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99562602	-	ELM99562602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99562603	-	ELM99562603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563181	-	ELM99563181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563182	-	ELM99563182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563183	-	ELM99563183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563191	-	ELM99563191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563192	-	ELM99563192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563193	-	ELM99563193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563201	-	ELM99563201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563202	-	ELM99563202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563203	-	ELM99563203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563211	-	ELM99563211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563212	-	ELM99563212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563213	-	ELM99563213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563221	-	ELM99563221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563222	-	ELM99563222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563223	-	ELM99563223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563231	-	ELM99563231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563232	-	ELM99563232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563233	-	ELM99563233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563241	-	ELM99563241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563242	-	ELM99563242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563243	-	ELM99563243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563251	-	ELM99563251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563252	-	ELM99563252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563253	-	ELM99563253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563261	-	ELM99563261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563262	-	ELM99563262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563263	-	ELM99563263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563271	-	ELM99563271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563272	-	ELM99563272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563273	-	ELM99563273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563281	-	ELM99563281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563282	-	ELM99563282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563283	-	ELM99563283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563291	-	ELM99563291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563292	-	ELM99563292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563293	-	ELM99563293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563301	-	ELM99563301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563302	-	ELM99563302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563303	-	ELM99563303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563311	-	ELM99563311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99563312	-	ELM99563312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563313	-	ELM99563313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563321	-	ELM99563321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563322	-	ELM99563322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563323	-	ELM99563323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563331	-	ELM99563331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563332	-	ELM99563332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563333	-	ELM99563333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563341	-	ELM99563341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563342	-	ELM99563342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563343	-	ELM99563343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563351	-	ELM99563351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563352	-	ELM99563352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563353	-	ELM99563353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563361	-	ELM99563361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563362	-	ELM99563362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563363	-	ELM99563363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563371	-	ELM99563371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563372	-	ELM99563372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563373	-	ELM99563373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563381	-	ELM99563381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563382	-	ELM99563382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563383	-	ELM99563383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563391	-	ELM99563391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563392	-	ELM99563392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563393	-	ELM99563393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563401	-	ELM99563401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563402	-	ELM99563402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563403	-	ELM99563403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563411	-	ELM99563411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563412	-	ELM99563412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563413	-	ELM99563413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563421	-	ELM99563421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563422	-	ELM99563422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563423	-	ELM99563423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563431	-	ELM99563431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563432	-	ELM99563432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563433	-	ELM99563433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563441	-	ELM99563441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563442	-	ELM99563442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563443	-	ELM99563443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563451	-	ELM99563451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563452	-	ELM99563452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563453	-	ELM99563453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563461	-	ELM99563461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563462	-	ELM99563462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563463	-	ELM99563463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563471	-	ELM99563471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563472	-	ELM99563472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563473	-	ELM99563473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563481	-	ELM99563481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563482	-	ELM99563482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563483	-	ELM99563483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563491	-	ELM99563491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563492	-	ELM99563492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563493	-	ELM99563493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563501	-	ELM99563501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563502	-	ELM99563502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563503	-	ELM99563503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563511	-	ELM99563511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563512	-	ELM99563512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563513	-	ELM99563513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563521	-	ELM99563521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563522	-	ELM99563522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563523	-	ELM99563523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563531	-	ELM99563531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563532	-	ELM99563532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563533	-	ELM99563533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563541	-	ELM99563541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563542	-	ELM99563542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99563543	-	ELM99563543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563551	-	ELM99563551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563552	-	ELM99563552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563553	-	ELM99563553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563561	-	ELM99563561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563562	-	ELM99563562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563563	-	ELM99563563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563571	-	ELM99563571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563572	-	ELM99563572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563573	-	ELM99563573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563581	-	ELM99563581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563582	-	ELM99563582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563583	-	ELM99563583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563591	-	ELM99563591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563592	-	ELM99563592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563593	-	ELM99563593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99563601	-	ELM99563601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99563602	-	ELM99563602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99563603	-	ELM99563603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.6V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99571181	-	ELM99571181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571182	-	ELM99571182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571183	-	ELM99571183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571191	-	ELM99571191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571192	-	ELM99571192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571193	-	ELM99571193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571201	-	ELM99571201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571202	-	ELM99571202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571203	-	ELM99571203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571211	-	ELM99571211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571212	-	ELM99571212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571213	-	ELM99571213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571221	-	ELM99571221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571222	-	ELM99571222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571223	-	ELM99571223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571231	-	ELM99571231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571232	-	ELM99571232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571233	-	ELM99571233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571241	-	ELM99571241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571242	-	ELM99571242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571243	-	ELM99571243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571251	-	ELM99571251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571252	-	ELM99571252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571253	-	ELM99571253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571261	-	ELM99571261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571262	-	ELM99571262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571263	-	ELM99571263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571271	-	ELM99571271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571272	-	ELM99571272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571273	-	ELM99571273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571281	-	ELM99571281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571282	-	ELM99571282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571283	-	ELM99571283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571291	-	ELM99571291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571292	-	ELM99571292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571293	-	ELM99571293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571301	-	ELM99571301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571302	-	ELM99571302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571303	-	ELM99571303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571311	-	ELM99571311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571312	-	ELM99571312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571313	-	ELM99571313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571321	-	ELM99571321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571322	-	ELM99571322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571323	-	ELM99571323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571331	-	ELM99571331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571332	-	ELM99571332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571333	-	ELM99571333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571341	-	ELM99571341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571342	-	ELM99571342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571343	-	ELM99571343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99571351	-	ELM99571351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571352	-	ELM99571352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571353	-	ELM99571353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571361	-	ELM99571361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571362	-	ELM99571362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571363	-	ELM99571363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571371	-	ELM99571371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571372	-	ELM99571372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571373	-	ELM99571373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571381	-	ELM99571381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571382	-	ELM99571382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571383	-	ELM99571383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571391	-	ELM99571391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571392	-	ELM99571392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571393	-	ELM99571393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571401	-	ELM99571401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571402	-	ELM99571402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571403	-	ELM99571403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571411	-	ELM99571411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571412	-	ELM99571412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571413	-	ELM99571413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571421	-	ELM99571421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571422	-	ELM99571422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571423	-	ELM99571423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571431	-	ELM99571431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571432	-	ELM99571432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571433	-	ELM99571433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571441	-	ELM99571441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571442	-	ELM99571442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571443	-	ELM99571443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571451	-	ELM99571451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571452	-	ELM99571452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571453	-	ELM99571453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571461	-	ELM99571461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571462	-	ELM99571462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571463	-	ELM99571463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571471	-	ELM99571471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571472	-	ELM99571472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571473	-	ELM99571473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571481	-	ELM99571481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571482	-	ELM99571482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571483	-	ELM99571483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571491	-	ELM99571491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571492	-	ELM99571492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571493	-	ELM99571493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571501	-	ELM99571501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571502	-	ELM99571502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571503	-	ELM99571503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571511	-	ELM99571511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571512	-	ELM99571512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571513	-	ELM99571513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571521	-	ELM99571521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571522	-	ELM99571522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571523	-	ELM99571523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571531	-	ELM99571531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571532	-	ELM99571532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571533	-	ELM99571533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571541	-	ELM99571541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571542	-	ELM99571542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571543	-	ELM99571543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571551	-	ELM99571551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571552	-	ELM99571552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571553	-	ELM99571553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571561	-	ELM99571561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571562	-	ELM99571562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571563	-	ELM99571563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571571	-	ELM99571571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571572	-	ELM99571572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571573	-	ELM99571573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571581	-	ELM99571581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99571582	-	ELM99571582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571583	-	ELM99571583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571591	-	ELM99571591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571592	-	ELM99571592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571593	-	ELM99571593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99571601	-	ELM99571601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99571602	-	ELM99571602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99571603	-	ELM99571603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99572181	-	ELM99572181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572182	-	ELM99572182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572183	-	ELM99572183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572191	-	ELM99572191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572192	-	ELM99572192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572193	-	ELM99572193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572201	-	ELM99572201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572202	-	ELM99572202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572203	-	ELM99572203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572211	-	ELM99572211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572212	-	ELM99572212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572213	-	ELM99572213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572221	-	ELM99572221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572222	-	ELM99572222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572223	-	ELM99572223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572231	-	ELM99572231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572232	-	ELM99572232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572233	-	ELM99572233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572241	-	ELM99572241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572242	-	ELM99572242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572243	-	ELM99572243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572251	-	ELM99572251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572252	-	ELM99572252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572253	-	ELM99572253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572261	-	ELM99572261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572262	-	ELM99572262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572263	-	ELM99572263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572271	-	ELM99572271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572272	-	ELM99572272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572273	-	ELM99572273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572281	-	ELM99572281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572282	-	ELM99572282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572283	-	ELM99572283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572291	-	ELM99572291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572292	-	ELM99572292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572293	-	ELM99572293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572301	-	ELM99572301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572302	-	ELM99572302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572303	-	ELM99572303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572311	-	ELM99572311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572312	-	ELM99572312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572313	-	ELM99572313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572321	-	ELM99572321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572322	-	ELM99572322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572323	-	ELM99572323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572331	-	ELM99572331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572332	-	ELM99572332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572333	-	ELM99572333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572341	-	ELM99572341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572342	-	ELM99572342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572343	-	ELM99572343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572351	-	ELM99572351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572352	-	ELM99572352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572353	-	ELM99572353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572361	-	ELM99572361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572362	-	ELM99572362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572363	-	ELM99572363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572371	-	ELM99572371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572372	-	ELM99572372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572373	-	ELM99572373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572381	-	ELM99572381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572382	-	ELM99572382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99572383	-	ELM99572383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572391	-	ELM99572391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572392	-	ELM99572392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572393	-	ELM99572393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572401	-	ELM99572401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572402	-	ELM99572402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572403	-	ELM99572403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572411	-	ELM99572411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572412	-	ELM99572412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572413	-	ELM99572413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572421	-	ELM99572421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572422	-	ELM99572422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572423	-	ELM99572423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572431	-	ELM99572431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572432	-	ELM99572432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572433	-	ELM99572433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572441	-	ELM99572441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572442	-	ELM99572442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572443	-	ELM99572443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572451	-	ELM99572451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572452	-	ELM99572452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572453	-	ELM99572453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572461	-	ELM99572461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572462	-	ELM99572462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572463	-	ELM99572463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572471	-	ELM99572471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572472	-	ELM99572472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572473	-	ELM99572473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572481	-	ELM99572481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572482	-	ELM99572482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572483	-	ELM99572483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572491	-	ELM99572491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572492	-	ELM99572492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572493	-	ELM99572493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572501	-	ELM99572501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572502	-	ELM99572502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572503	-	ELM99572503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572511	-	ELM99572511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572512	-	ELM99572512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572513	-	ELM99572513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572521	-	ELM99572521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572522	-	ELM99572522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572523	-	ELM99572523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572531	-	ELM99572531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572532	-	ELM99572532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572533	-	ELM99572533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572541	-	ELM99572541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572542	-	ELM99572542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572543	-	ELM99572543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572551	-	ELM99572551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572552	-	ELM99572552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572553	-	ELM99572553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572561	-	ELM99572561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572562	-	ELM99572562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572563	-	ELM99572563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572571	-	ELM99572571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572572	-	ELM99572572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572573	-	ELM99572573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572581	-	ELM99572581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572582	-	ELM99572582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572583	-	ELM99572583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572591	-	ELM99572591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572592	-	ELM99572592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572593	-	ELM99572593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99572601	-	ELM99572601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99572602	-	ELM99572602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99572603	-	ELM99572603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573181	-	ELM99573181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573182	-	ELM99573182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573183	-	ELM99573183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99573191	-	ELM99573191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573192	-	ELM99573192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573193	-	ELM99573193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573201	-	ELM99573201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573202	-	ELM99573202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573203	-	ELM99573203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573211	-	ELM99573211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573212	-	ELM99573212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573213	-	ELM99573213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573221	-	ELM99573221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573222	-	ELM99573222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573223	-	ELM99573223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573231	-	ELM99573231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573232	-	ELM99573232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573233	-	ELM99573233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573241	-	ELM99573241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573242	-	ELM99573242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573243	-	ELM99573243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573251	-	ELM99573251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573252	-	ELM99573252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573253	-	ELM99573253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573261	-	ELM99573261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573262	-	ELM99573262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573263	-	ELM99573263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573271	-	ELM99573271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573272	-	ELM99573272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573273	-	ELM99573273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573281	-	ELM99573281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573282	-	ELM99573282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573283	-	ELM99573283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573291	-	ELM99573291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573292	-	ELM99573292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573293	-	ELM99573293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573301	-	ELM99573301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573302	-	ELM99573302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573303	-	ELM99573303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573311	-	ELM99573311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573312	-	ELM99573312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573313	-	ELM99573313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573321	-	ELM99573321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573322	-	ELM99573322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573323	-	ELM99573323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573331	-	ELM99573331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573332	-	ELM99573332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573333	-	ELM99573333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573341	-	ELM99573341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573342	-	ELM99573342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573343	-	ELM99573343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573351	-	ELM99573351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573352	-	ELM99573352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573353	-	ELM99573353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573361	-	ELM99573361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573362	-	ELM99573362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573363	-	ELM99573363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573371	-	ELM99573371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573372	-	ELM99573372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573373	-	ELM99573373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573381	-	ELM99573381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573382	-	ELM99573382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573383	-	ELM99573383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573391	-	ELM99573391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573392	-	ELM99573392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573393	-	ELM99573393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573401	-	ELM99573401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573402	-	ELM99573402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573403	-	ELM99573403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573411	-	ELM99573411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573412	-	ELM99573412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573413	-	ELM99573413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573421	-	ELM99573421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99573422	-	ELM99573422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573423	-	ELM99573423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573431	-	ELM99573431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573432	-	ELM99573432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573433	-	ELM99573433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573441	-	ELM99573441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573442	-	ELM99573442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573443	-	ELM99573443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573451	-	ELM99573451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573452	-	ELM99573452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573453	-	ELM99573453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573461	-	ELM99573461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573462	-	ELM99573462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573463	-	ELM99573463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573471	-	ELM99573471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573472	-	ELM99573472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573473	-	ELM99573473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573481	-	ELM99573481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573482	-	ELM99573482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573483	-	ELM99573483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573491	-	ELM99573491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573492	-	ELM99573492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573493	-	ELM99573493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573501	-	ELM99573501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573502	-	ELM99573502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573503	-	ELM99573503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573511	-	ELM99573511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573512	-	ELM99573512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573513	-	ELM99573513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573521	-	ELM99573521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573522	-	ELM99573522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573523	-	ELM99573523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573531	-	ELM99573531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573532	-	ELM99573532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573533	-	ELM99573533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573541	-	ELM99573541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573542	-	ELM99573542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573543	-	ELM99573543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573551	-	ELM99573551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573552	-	ELM99573552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573553	-	ELM99573553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573561	-	ELM99573561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573562	-	ELM99573562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573563	-	ELM99573563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573571	-	ELM99573571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573572	-	ELM99573572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573573	-	ELM99573573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573581	-	ELM99573581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573582	-	ELM99573582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573583	-	ELM99573583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573591	-	ELM99573591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573592	-	ELM99573592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573593	-	ELM99573593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99573601	-	ELM99573601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99573602	-	ELM99573602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99573603	-	ELM99573603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.7V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99581181	-	ELM99581181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581182	-	ELM99581182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581183	-	ELM99581183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581191	-	ELM99581191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581192	-	ELM99581192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581193	-	ELM99581193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581201	-	ELM99581201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581202	-	ELM99581202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581203	-	ELM99581203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581211	-	ELM99581211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581212	-	ELM99581212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581213	-	ELM99581213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581221	-	ELM99581221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581222	-	ELM99581222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99581223	-	ELM99581223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581231	-	ELM99581231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581232	-	ELM99581232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581233	-	ELM99581233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581241	-	ELM99581241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581242	-	ELM99581242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581243	-	ELM99581243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581251	-	ELM99581251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581252	-	ELM99581252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581253	-	ELM99581253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581261	-	ELM99581261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581262	-	ELM99581262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581263	-	ELM99581263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581271	-	ELM99581271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581272	-	ELM99581272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581273	-	ELM99581273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581281	-	ELM99581281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581282	-	ELM99581282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581283	-	ELM99581283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581291	-	ELM99581291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581292	-	ELM99581292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581293	-	ELM99581293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581301	-	ELM99581301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581302	-	ELM99581302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581303	-	ELM99581303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581311	-	ELM99581311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581312	-	ELM99581312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581313	-	ELM99581313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581321	-	ELM99581321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581322	-	ELM99581322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581323	-	ELM99581323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581331	-	ELM99581331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581332	-	ELM99581332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581333	-	ELM99581333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581341	-	ELM99581341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581342	-	ELM99581342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581343	-	ELM99581343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581351	-	ELM99581351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581352	-	ELM99581352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581353	-	ELM99581353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581361	-	ELM99581361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581362	-	ELM99581362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581363	-	ELM99581363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581371	-	ELM99581371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581372	-	ELM99581372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581373	-	ELM99581373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581381	-	ELM99581381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581382	-	ELM99581382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581383	-	ELM99581383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581391	-	ELM99581391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581392	-	ELM99581392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581393	-	ELM99581393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581401	-	ELM99581401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581402	-	ELM99581402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581403	-	ELM99581403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581411	-	ELM99581411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581412	-	ELM99581412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581413	-	ELM99581413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581421	-	ELM99581421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581422	-	ELM99581422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581423	-	ELM99581423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581431	-	ELM99581431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581432	-	ELM99581432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581433	-	ELM99581433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581441	-	ELM99581441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581442	-	ELM99581442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581443	-	ELM99581443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581451	-	ELM99581451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581452	-	ELM99581452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581453	-	ELM99581453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99581461	-	ELM99581461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581462	-	ELM99581462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581463	-	ELM99581463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581471	-	ELM99581471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581472	-	ELM99581472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581473	-	ELM99581473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581481	-	ELM99581481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581482	-	ELM99581482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581483	-	ELM99581483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581491	-	ELM99581491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581492	-	ELM99581492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581493	-	ELM99581493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581501	-	ELM99581501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581502	-	ELM99581502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581503	-	ELM99581503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581511	-	ELM99581511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581512	-	ELM99581512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581513	-	ELM99581513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581521	-	ELM99581521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581522	-	ELM99581522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581523	-	ELM99581523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581531	-	ELM99581531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581532	-	ELM99581532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581533	-	ELM99581533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581541	-	ELM99581541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581542	-	ELM99581542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581543	-	ELM99581543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581551	-	ELM99581551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581552	-	ELM99581552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581553	-	ELM99581553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581561	-	ELM99581561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581562	-	ELM99581562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581563	-	ELM99581563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581571	-	ELM99581571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581572	-	ELM99581572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581573	-	ELM99581573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581581	-	ELM99581581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581582	-	ELM99581582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581583	-	ELM99581583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581591	-	ELM99581591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581592	-	ELM99581592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581593	-	ELM99581593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99581601	-	ELM99581601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99581602	-	ELM99581602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99581603	-	ELM99581603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99582181	-	ELM99582181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582182	-	ELM99582182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582183	-	ELM99582183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582191	-	ELM99582191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582192	-	ELM99582192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582193	-	ELM99582193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582201	-	ELM99582201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582202	-	ELM99582202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582203	-	ELM99582203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582211	-	ELM99582211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582212	-	ELM99582212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582213	-	ELM99582213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582221	-	ELM99582221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582222	-	ELM99582222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582223	-	ELM99582223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582231	-	ELM99582231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582232	-	ELM99582232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582233	-	ELM99582233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582241	-	ELM99582241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582242	-	ELM99582242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582243	-	ELM99582243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582251	-	ELM99582251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582252	-	ELM99582252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582253	-	ELM99582253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582261	-	ELM99582261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99582262	-	ELM99582262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582263	-	ELM99582263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582271	-	ELM99582271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582272	-	ELM99582272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582273	-	ELM99582273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582281	-	ELM99582281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582282	-	ELM99582282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582283	-	ELM99582283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582291	-	ELM99582291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582292	-	ELM99582292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582293	-	ELM99582293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582301	-	ELM99582301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582302	-	ELM99582302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582303	-	ELM99582303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582311	-	ELM99582311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582312	-	ELM99582312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582313	-	ELM99582313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582321	-	ELM99582321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582322	-	ELM99582322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582323	-	ELM99582323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582331	-	ELM99582331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582332	-	ELM99582332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582333	-	ELM99582333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582341	-	ELM99582341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582342	-	ELM99582342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582343	-	ELM99582343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582351	-	ELM99582351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582352	-	ELM99582352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582353	-	ELM99582353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582361	-	ELM99582361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582362	-	ELM99582362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582363	-	ELM99582363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582371	-	ELM99582371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582372	-	ELM99582372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582373	-	ELM99582373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582381	-	ELM99582381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582382	-	ELM99582382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582383	-	ELM99582383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582391	-	ELM99582391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582392	-	ELM99582392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582393	-	ELM99582393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582401	-	ELM99582401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582402	-	ELM99582402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582403	-	ELM99582403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582411	-	ELM99582411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582412	-	ELM99582412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582413	-	ELM99582413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582421	-	ELM99582421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582422	-	ELM99582422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582423	-	ELM99582423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582431	-	ELM99582431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582432	-	ELM99582432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582433	-	ELM99582433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582441	-	ELM99582441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582442	-	ELM99582442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582443	-	ELM99582443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582451	-	ELM99582451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582452	-	ELM99582452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582453	-	ELM99582453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582461	-	ELM99582461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582462	-	ELM99582462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582463	-	ELM99582463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582471	-	ELM99582471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582472	-	ELM99582472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582473	-	ELM99582473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582481	-	ELM99582481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582482	-	ELM99582482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582483	-	ELM99582483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582491	-	ELM99582491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582492	-	ELM99582492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99582493	-	ELM99582493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582501	-	ELM99582501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582502	-	ELM99582502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582503	-	ELM99582503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582511	-	ELM99582511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582512	-	ELM99582512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582513	-	ELM99582513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582521	-	ELM99582521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582522	-	ELM99582522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582523	-	ELM99582523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582531	-	ELM99582531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582532	-	ELM99582532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582533	-	ELM99582533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582541	-	ELM99582541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582542	-	ELM99582542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582543	-	ELM99582543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582551	-	ELM99582551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582552	-	ELM99582552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582553	-	ELM99582553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582561	-	ELM99582561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582562	-	ELM99582562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582563	-	ELM99582563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582571	-	ELM99582571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582572	-	ELM99582572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582573	-	ELM99582573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582581	-	ELM99582581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582582	-	ELM99582582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582583	-	ELM99582583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582591	-	ELM99582591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582592	-	ELM99582592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582593	-	ELM99582593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99582601	-	ELM99582601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99582602	-	ELM99582602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99582603	-	ELM99582603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583181	-	ELM99583181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583182	-	ELM99583182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583183	-	ELM99583183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583191	-	ELM99583191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583192	-	ELM99583192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583193	-	ELM99583193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583201	-	ELM99583201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583202	-	ELM99583202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583203	-	ELM99583203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583211	-	ELM99583211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583212	-	ELM99583212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583213	-	ELM99583213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583221	-	ELM99583221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583222	-	ELM99583222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583223	-	ELM99583223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583231	-	ELM99583231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583232	-	ELM99583232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583233	-	ELM99583233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583241	-	ELM99583241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583242	-	ELM99583242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583243	-	ELM99583243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583251	-	ELM99583251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583252	-	ELM99583252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583253	-	ELM99583253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583261	-	ELM99583261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583262	-	ELM99583262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583263	-	ELM99583263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583271	-	ELM99583271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583272	-	ELM99583272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583273	-	ELM99583273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583281	-	ELM99583281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583282	-	ELM99583282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583283	-	ELM99583283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583291	-	ELM99583291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583292	-	ELM99583292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583293	-	ELM99583293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99583301	-	ELM99583301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583302	-	ELM99583302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583303	-	ELM99583303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583311	-	ELM99583311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583312	-	ELM99583312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583313	-	ELM99583313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583321	-	ELM99583321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583322	-	ELM99583322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583323	-	ELM99583323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583331	-	ELM99583331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583332	-	ELM99583332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583333	-	ELM99583333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583341	-	ELM99583341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583342	-	ELM99583342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583343	-	ELM99583343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583351	-	ELM99583351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583352	-	ELM99583352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583353	-	ELM99583353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583361	-	ELM99583361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583362	-	ELM99583362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583363	-	ELM99583363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583371	-	ELM99583371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583372	-	ELM99583372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583373	-	ELM99583373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583381	-	ELM99583381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583382	-	ELM99583382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583383	-	ELM99583383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583391	-	ELM99583391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583392	-	ELM99583392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583393	-	ELM99583393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583401	-	ELM99583401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583402	-	ELM99583402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583403	-	ELM99583403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583411	-	ELM99583411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583412	-	ELM99583412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583413	-	ELM99583413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583421	-	ELM99583421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583422	-	ELM99583422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583423	-	ELM99583423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583431	-	ELM99583431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583432	-	ELM99583432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583433	-	ELM99583433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583441	-	ELM99583441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583442	-	ELM99583442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583443	-	ELM99583443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583451	-	ELM99583451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583452	-	ELM99583452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583453	-	ELM99583453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583461	-	ELM99583461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583462	-	ELM99583462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583463	-	ELM99583463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583471	-	ELM99583471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583472	-	ELM99583472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583473	-	ELM99583473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583481	-	ELM99583481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583482	-	ELM99583482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583483	-	ELM99583483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583491	-	ELM99583491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583492	-	ELM99583492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583493	-	ELM99583493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583501	-	ELM99583501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583502	-	ELM99583502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583503	-	ELM99583503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583511	-	ELM99583511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583512	-	ELM99583512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583513	-	ELM99583513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583521	-	ELM99583521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583522	-	ELM99583522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583523	-	ELM99583523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583531	-	ELM99583531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99583532	-	ELM99583532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583533	-	ELM99583533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583541	-	ELM99583541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583542	-	ELM99583542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583543	-	ELM99583543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583551	-	ELM99583551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583552	-	ELM99583552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583553	-	ELM99583553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583561	-	ELM99583561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583562	-	ELM99583562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583563	-	ELM99583563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583571	-	ELM99583571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583572	-	ELM99583572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583573	-	ELM99583573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583581	-	ELM99583581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583582	-	ELM99583582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583583	-	ELM99583583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583591	-	ELM99583591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583592	-	ELM99583592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583593	-	ELM99583593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99583601	-	ELM99583601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99583602	-	ELM99583602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99583603	-	ELM99583603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.8V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99591181	-	ELM99591181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591182	-	ELM99591182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591183	-	ELM99591183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591191	-	ELM99591191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591192	-	ELM99591192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591193	-	ELM99591193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591201	-	ELM99591201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591202	-	ELM99591202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591203	-	ELM99591203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591211	-	ELM99591211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591212	-	ELM99591212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591213	-	ELM99591213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591221	-	ELM99591221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591222	-	ELM99591222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591223	-	ELM99591223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591231	-	ELM99591231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591232	-	ELM99591232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591233	-	ELM99591233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591241	-	ELM99591241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591242	-	ELM99591242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591243	-	ELM99591243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591251	-	ELM99591251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591252	-	ELM99591252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591253	-	ELM99591253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591261	-	ELM99591261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591262	-	ELM99591262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591263	-	ELM99591263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591271	-	ELM99591271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591272	-	ELM99591272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591273	-	ELM99591273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591281	-	ELM99591281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591282	-	ELM99591282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591283	-	ELM99591283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591291	-	ELM99591291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591292	-	ELM99591292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591293	-	ELM99591293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591301	-	ELM99591301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591302	-	ELM99591302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591303	-	ELM99591303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591311	-	ELM99591311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591312	-	ELM99591312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591313	-	ELM99591313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591321	-	ELM99591321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591322	-	ELM99591322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591323	-	ELM99591323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591331	-	ELM99591331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591332	-	ELM99591332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99591333	-	ELM99591333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591341	-	ELM99591341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591342	-	ELM99591342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591343	-	ELM99591343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591351	-	ELM99591351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591352	-	ELM99591352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591353	-	ELM99591353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591361	-	ELM99591361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591362	-	ELM99591362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591363	-	ELM99591363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591371	-	ELM99591371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591372	-	ELM99591372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591373	-	ELM99591373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591381	-	ELM99591381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591382	-	ELM99591382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591383	-	ELM99591383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591391	-	ELM99591391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591392	-	ELM99591392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591393	-	ELM99591393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591401	-	ELM99591401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591402	-	ELM99591402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591403	-	ELM99591403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591411	-	ELM99591411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591412	-	ELM99591412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591413	-	ELM99591413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591421	-	ELM99591421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591422	-	ELM99591422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591423	-	ELM99591423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591431	-	ELM99591431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591432	-	ELM99591432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591433	-	ELM99591433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591441	-	ELM99591441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591442	-	ELM99591442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591443	-	ELM99591443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591451	-	ELM99591451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591452	-	ELM99591452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591453	-	ELM99591453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591461	-	ELM99591461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591462	-	ELM99591462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591463	-	ELM99591463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591471	-	ELM99591471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591472	-	ELM99591472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591473	-	ELM99591473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591481	-	ELM99591481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591482	-	ELM99591482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591483	-	ELM99591483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591491	-	ELM99591491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591492	-	ELM99591492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591493	-	ELM99591493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591501	-	ELM99591501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591502	-	ELM99591502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591503	-	ELM99591503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591511	-	ELM99591511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591512	-	ELM99591512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591513	-	ELM99591513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591521	-	ELM99591521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591522	-	ELM99591522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591523	-	ELM99591523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591531	-	ELM99591531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591532	-	ELM99591532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591533	-	ELM99591533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591541	-	ELM99591541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591542	-	ELM99591542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591543	-	ELM99591543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591551	-	ELM99591551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591552	-	ELM99591552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591553	-	ELM99591553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591561	-	ELM99591561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591562	-	ELM99591562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591563	-	ELM99591563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99591571	-	ELM99591571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591572	-	ELM99591572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591573	-	ELM99591573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591581	-	ELM99591581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591582	-	ELM99591582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591583	-	ELM99591583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591591	-	ELM99591591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591592	-	ELM99591592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591593	-	ELM99591593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99591601	-	ELM99591601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99591602	-	ELM99591602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99591603	-	ELM99591603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99592181	-	ELM99592181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592182	-	ELM99592182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592183	-	ELM99592183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592191	-	ELM99592191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592192	-	ELM99592192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592193	-	ELM99592193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592201	-	ELM99592201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592202	-	ELM99592202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592203	-	ELM99592203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592211	-	ELM99592211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592212	-	ELM99592212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592213	-	ELM99592213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592221	-	ELM99592221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592222	-	ELM99592222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592223	-	ELM99592223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592231	-	ELM99592231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592232	-	ELM99592232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592233	-	ELM99592233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592241	-	ELM99592241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592242	-	ELM99592242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592243	-	ELM99592243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592251	-	ELM99592251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592252	-	ELM99592252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592253	-	ELM99592253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592261	-	ELM99592261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592262	-	ELM99592262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592263	-	ELM99592263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592271	-	ELM99592271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592272	-	ELM99592272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592273	-	ELM99592273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592281	-	ELM99592281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592282	-	ELM99592282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592283	-	ELM99592283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592291	-	ELM99592291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592292	-	ELM99592292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592293	-	ELM99592293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592301	-	ELM99592301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592302	-	ELM99592302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592303	-	ELM99592303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592311	-	ELM99592311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592312	-	ELM99592312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592313	-	ELM99592313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592321	-	ELM99592321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592322	-	ELM99592322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592323	-	ELM99592323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592331	-	ELM99592331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592332	-	ELM99592332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592333	-	ELM99592333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592341	-	ELM99592341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592342	-	ELM99592342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592343	-	ELM99592343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592351	-	ELM99592351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592352	-	ELM99592352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592353	-	ELM99592353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592361	-	ELM99592361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592362	-	ELM99592362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592363	-	ELM99592363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592371	-	ELM99592371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99592372	-	ELM99592372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592373	-	ELM99592373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592381	-	ELM99592381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592382	-	ELM99592382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592383	-	ELM99592383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592391	-	ELM99592391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592392	-	ELM99592392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592393	-	ELM99592393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592401	-	ELM99592401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592402	-	ELM99592402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592403	-	ELM99592403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592411	-	ELM99592411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592412	-	ELM99592412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592413	-	ELM99592413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592421	-	ELM99592421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592422	-	ELM99592422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592423	-	ELM99592423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592431	-	ELM99592431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592432	-	ELM99592432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592433	-	ELM99592433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592441	-	ELM99592441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592442	-	ELM99592442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592443	-	ELM99592443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592451	-	ELM99592451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592452	-	ELM99592452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592453	-	ELM99592453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592461	-	ELM99592461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592462	-	ELM99592462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592463	-	ELM99592463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592471	-	ELM99592471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592472	-	ELM99592472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592473	-	ELM99592473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592481	-	ELM99592481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592482	-	ELM99592482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592483	-	ELM99592483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592491	-	ELM99592491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592492	-	ELM99592492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592493	-	ELM99592493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592501	-	ELM99592501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592502	-	ELM99592502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592503	-	ELM99592503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592511	-	ELM99592511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592512	-	ELM99592512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592513	-	ELM99592513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592521	-	ELM99592521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592522	-	ELM99592522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592523	-	ELM99592523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592531	-	ELM99592531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592532	-	ELM99592532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592533	-	ELM99592533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592541	-	ELM99592541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592542	-	ELM99592542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592543	-	ELM99592543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592551	-	ELM99592551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592552	-	ELM99592552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592553	-	ELM99592553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592561	-	ELM99592561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592562	-	ELM99592562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592563	-	ELM99592563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592571	-	ELM99592571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592572	-	ELM99592572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592573	-	ELM99592573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592581	-	ELM99592581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592582	-	ELM99592582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592583	-	ELM99592583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592591	-	ELM99592591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592592	-	ELM99592592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99592593	-	ELM99592593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99592601	-	ELM99592601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99592602	-	ELM99592602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99592603	-	ELM99592603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593181	-	ELM99593181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593182	-	ELM99593182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593183	-	ELM99593183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593191	-	ELM99593191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593192	-	ELM99593192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593193	-	ELM99593193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593201	-	ELM99593201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593202	-	ELM99593202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593203	-	ELM99593203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593211	-	ELM99593211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593212	-	ELM99593212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593213	-	ELM99593213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593221	-	ELM99593221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593222	-	ELM99593222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593223	-	ELM99593223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593231	-	ELM99593231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593232	-	ELM99593232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593233	-	ELM99593233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593241	-	ELM99593241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593242	-	ELM99593242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593243	-	ELM99593243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593251	-	ELM99593251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593252	-	ELM99593252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593253	-	ELM99593253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593261	-	ELM99593261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593262	-	ELM99593262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593263	-	ELM99593263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593271	-	ELM99593271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593272	-	ELM99593272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593273	-	ELM99593273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593281	-	ELM99593281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593282	-	ELM99593282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593283	-	ELM99593283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593291	-	ELM99593291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593292	-	ELM99593292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593293	-	ELM99593293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593301	-	ELM99593301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593302	-	ELM99593302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593303	-	ELM99593303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593311	-	ELM99593311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593312	-	ELM99593312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593313	-	ELM99593313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593321	-	ELM99593321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593322	-	ELM99593322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593323	-	ELM99593323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593331	-	ELM99593331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593332	-	ELM99593332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593333	-	ELM99593333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593341	-	ELM99593341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593342	-	ELM99593342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593343	-	ELM99593343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593351	-	ELM99593351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593352	-	ELM99593352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593353	-	ELM99593353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593361	-	ELM99593361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593362	-	ELM99593362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593363	-	ELM99593363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593371	-	ELM99593371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593372	-	ELM99593372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593373	-	ELM99593373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593381	-	ELM99593381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593382	-	ELM99593382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593383	-	ELM99593383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593391	-	ELM99593391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593392	-	ELM99593392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593393	-	ELM99593393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593401	-	ELM99593401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593402	-	ELM99593402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593403	-	ELM99593403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99593411	-	ELM99593411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593412	-	ELM99593412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593413	-	ELM99593413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593421	-	ELM99593421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593422	-	ELM99593422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593423	-	ELM99593423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593431	-	ELM99593431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593432	-	ELM99593432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593433	-	ELM99593433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593441	-	ELM99593441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593442	-	ELM99593442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593443	-	ELM99593443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593451	-	ELM99593451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593452	-	ELM99593452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593453	-	ELM99593453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593461	-	ELM99593461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593462	-	ELM99593462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593463	-	ELM99593463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593471	-	ELM99593471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593472	-	ELM99593472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593473	-	ELM99593473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593481	-	ELM99593481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593482	-	ELM99593482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593483	-	ELM99593483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593491	-	ELM99593491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593492	-	ELM99593492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593493	-	ELM99593493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593501	-	ELM99593501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593502	-	ELM99593502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593503	-	ELM99593503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593511	-	ELM99593511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593512	-	ELM99593512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593513	-	ELM99593513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593521	-	ELM99593521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593522	-	ELM99593522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593523	-	ELM99593523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593531	-	ELM99593531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593532	-	ELM99593532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593533	-	ELM99593533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593541	-	ELM99593541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593542	-	ELM99593542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593543	-	ELM99593543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593551	-	ELM99593551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593552	-	ELM99593552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593553	-	ELM99593553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593561	-	ELM99593561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593562	-	ELM99593562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593563	-	ELM99593563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593571	-	ELM99593571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593572	-	ELM99593572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593573	-	ELM99593573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593581	-	ELM99593581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593582	-	ELM99593582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593583	-	ELM99593583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593591	-	ELM99593591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593592	-	ELM99593592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593593	-	ELM99593593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99593601	-	ELM99593601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99593602	-	ELM99593602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99593603	-	ELM99593603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=5.9V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99601181	-	ELM99601181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601182	-	ELM99601182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601183	-	ELM99601183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601191	-	ELM99601191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601192	-	ELM99601192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601193	-	ELM99601193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601201	-	ELM99601201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601202	-	ELM99601202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601203	-	ELM99601203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601211	-	ELM99601211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99601212	-	ELM99601212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601213	-	ELM99601213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601221	-	ELM99601221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601222	-	ELM99601222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601223	-	ELM99601223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601231	-	ELM99601231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601232	-	ELM99601232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601233	-	ELM99601233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601241	-	ELM99601241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601242	-	ELM99601242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601243	-	ELM99601243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601251	-	ELM99601251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601252	-	ELM99601252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601253	-	ELM99601253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601261	-	ELM99601261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601262	-	ELM99601262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601263	-	ELM99601263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601271	-	ELM99601271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601272	-	ELM99601272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601273	-	ELM99601273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601281	-	ELM99601281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601282	-	ELM99601282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601283	-	ELM99601283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601291	-	ELM99601291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601292	-	ELM99601292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601293	-	ELM99601293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601301	-	ELM99601301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601302	-	ELM99601302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601303	-	ELM99601303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601311	-	ELM99601311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601312	-	ELM99601312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601313	-	ELM99601313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601321	-	ELM99601321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601322	-	ELM99601322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601323	-	ELM99601323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601331	-	ELM99601331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601332	-	ELM99601332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601333	-	ELM99601333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601341	-	ELM99601341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601342	-	ELM99601342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601343	-	ELM99601343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601351	-	ELM99601351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601352	-	ELM99601352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601353	-	ELM99601353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601361	-	ELM99601361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601362	-	ELM99601362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601363	-	ELM99601363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601371	-	ELM99601371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601372	-	ELM99601372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601373	-	ELM99601373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601381	-	ELM99601381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601382	-	ELM99601382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601383	-	ELM99601383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601391	-	ELM99601391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601392	-	ELM99601392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601393	-	ELM99601393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601401	-	ELM99601401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601402	-	ELM99601402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601403	-	ELM99601403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601411	-	ELM99601411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601412	-	ELM99601412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601413	-	ELM99601413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601421	-	ELM99601421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601422	-	ELM99601422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601423	-	ELM99601423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601431	-	ELM99601431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601432	-	ELM99601432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601433	-	ELM99601433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601441	-	ELM99601441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601442	-	ELM99601442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99601443	-	ELM99601443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601451	-	ELM99601451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601452	-	ELM99601452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601453	-	ELM99601453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601461	-	ELM99601461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601462	-	ELM99601462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601463	-	ELM99601463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601471	-	ELM99601471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601472	-	ELM99601472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601473	-	ELM99601473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601481	-	ELM99601481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601482	-	ELM99601482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601483	-	ELM99601483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601491	-	ELM99601491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601492	-	ELM99601492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601493	-	ELM99601493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601501	-	ELM99601501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601502	-	ELM99601502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601503	-	ELM99601503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601511	-	ELM99601511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.1V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601512	-	ELM99601512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.1V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601513	-	ELM99601513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.1V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601521	-	ELM99601521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.2V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601522	-	ELM99601522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.2V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601523	-	ELM99601523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.2V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601531	-	ELM99601531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.3V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601532	-	ELM99601532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.3V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601533	-	ELM99601533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.3V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601541	-	ELM99601541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.4V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601542	-	ELM99601542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.4V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601543	-	ELM99601543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.4V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601551	-	ELM99601551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.5V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601552	-	ELM99601552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.5V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601553	-	ELM99601553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.5V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601561	-	ELM99601561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.6V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601562	-	ELM99601562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.6V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601563	-	ELM99601563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.6V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601571	-	ELM99601571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.7V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601572	-	ELM99601572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.7V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601573	-	ELM99601573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.7V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601581	-	ELM99601581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.8V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601582	-	ELM99601582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.8V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601583	-	ELM99601583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.8V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601591	-	ELM99601591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.9V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601592	-	ELM99601592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.9V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601593	-	ELM99601593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.9V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99601601	-	ELM99601601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/6.0V±2%, 300mA	TSSOP-8	55gu	VR35	8q	Elm
99601602	-	ELM99601602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/6.0V±2%, 300mA, -CE2	TSSOP-8	55gs	VR34	8q	Elm
99601603	-	ELM99601603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/6.0V±2%, 300mA, +CE2	TSSOP-8	55gs	VR34	8q	Elm
99602181	-	ELM99602181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602182	-	ELM99602182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602183	-	ELM99602183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602191	-	ELM99602191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602192	-	ELM99602192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602193	-	ELM99602193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602201	-	ELM99602201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602202	-	ELM99602202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602203	-	ELM99602203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602211	-	ELM99602211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602212	-	ELM99602212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602213	-	ELM99602213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602221	-	ELM99602221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602222	-	ELM99602222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602223	-	ELM99602223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602231	-	ELM99602231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602232	-	ELM99602232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602233	-	ELM99602233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602241	-	ELM99602241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602242	-	ELM99602242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602243	-	ELM99602243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99602251	-	ELM99602251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602252	-	ELM99602252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602253	-	ELM99602253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602261	-	ELM99602261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602262	-	ELM99602262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602263	-	ELM99602263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602271	-	ELM99602271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602272	-	ELM99602272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602273	-	ELM99602273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602281	-	ELM99602281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602282	-	ELM99602282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602283	-	ELM99602283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602291	-	ELM99602291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602292	-	ELM99602292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602293	-	ELM99602293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602301	-	ELM99602301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602302	-	ELM99602302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602303	-	ELM99602303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602311	-	ELM99602311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602312	-	ELM99602312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602313	-	ELM99602313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602321	-	ELM99602321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602322	-	ELM99602322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602323	-	ELM99602323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602331	-	ELM99602331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602332	-	ELM99602332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602333	-	ELM99602333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602341	-	ELM99602341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602342	-	ELM99602342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602343	-	ELM99602343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602351	-	ELM99602351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602352	-	ELM99602352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602353	-	ELM99602353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602361	-	ELM99602361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602362	-	ELM99602362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602363	-	ELM99602363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602371	-	ELM99602371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602372	-	ELM99602372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602373	-	ELM99602373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602381	-	ELM99602381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602382	-	ELM99602382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602383	-	ELM99602383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602391	-	ELM99602391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602392	-	ELM99602392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602393	-	ELM99602393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602401	-	ELM99602401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602402	-	ELM99602402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602403	-	ELM99602403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602411	-	ELM99602411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602412	-	ELM99602412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602413	-	ELM99602413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602421	-	ELM99602421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602422	-	ELM99602422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602423	-	ELM99602423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602431	-	ELM99602431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602432	-	ELM99602432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602433	-	ELM99602433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602441	-	ELM99602441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602442	-	ELM99602442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602443	-	ELM99602443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602451	-	ELM99602451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602452	-	ELM99602452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602453	-	ELM99602453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602461	-	ELM99602461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602462	-	ELM99602462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602463	-	ELM99602463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602471	-	ELM99602471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602472	-	ELM99602472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602473	-	ELM99602473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602481	-	ELM99602481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99602482	-	ELM99602482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602483	-	ELM99602483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602491	-	ELM99602491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602492	-	ELM99602492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602493	-	ELM99602493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602501	-	ELM99602501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602502	-	ELM99602502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602503	-	ELM99602503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602511	-	ELM99602511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.1V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602512	-	ELM99602512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.1V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602513	-	ELM99602513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.1V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602521	-	ELM99602521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.2V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602522	-	ELM99602522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.2V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602523	-	ELM99602523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.2V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602531	-	ELM99602531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.3V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602532	-	ELM99602532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.3V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602533	-	ELM99602533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.3V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602541	-	ELM99602541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.4V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602542	-	ELM99602542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.4V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602543	-	ELM99602543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.4V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602551	-	ELM99602551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.5V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602552	-	ELM99602552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.5V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602553	-	ELM99602553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.5V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602561	-	ELM99602561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.6V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602562	-	ELM99602562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.6V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602563	-	ELM99602563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.6V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602571	-	ELM99602571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.7V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602572	-	ELM99602572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.7V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602573	-	ELM99602573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.7V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602581	-	ELM99602581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.8V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602582	-	ELM99602582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.8V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602583	-	ELM99602583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.8V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602591	-	ELM99602591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.9V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602592	-	ELM99602592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.9V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602593	-	ELM99602593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.9V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99602601	-	ELM99602601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/6.0V±2%, 300mA, -CE1	TSSOP-8	55gt	VR33	8q	Elm
99602602	-	ELM99602602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/6.0V±2%, 300mA, -CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99602603	-	ELM99602603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/6.0V±2%, 300mA, -CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603181	-	ELM99603181AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603182	-	ELM99603182AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603183	-	ELM99603183AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603191	-	ELM99603191AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603192	-	ELM99603192AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603193	-	ELM99603193AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/1.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603201	-	ELM99603201AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603202	-	ELM99603202AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603203	-	ELM99603203AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603211	-	ELM99603211AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603212	-	ELM99603212AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603213	-	ELM99603213AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603221	-	ELM99603221AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603222	-	ELM99603222AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603223	-	ELM99603223AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603231	-	ELM99603231AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603232	-	ELM99603232AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603233	-	ELM99603233AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603241	-	ELM99603241AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603242	-	ELM99603242AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603243	-	ELM99603243AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603251	-	ELM99603251AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603252	-	ELM99603252AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603253	-	ELM99603253AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603261	-	ELM99603261AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603262	-	ELM99603262AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603263	-	ELM99603263AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603271	-	ELM99603271AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603272	-	ELM99603272AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603273	-	ELM99603273AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603281	-	ELM99603281AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603282	-	ELM99603282AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99603283	-	ELM99603283AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603291	-	ELM99603291AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603292	-	ELM99603292AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603293	-	ELM99603293AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/2.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603301	-	ELM99603301AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603302	-	ELM99603302AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603303	-	ELM99603303AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603311	-	ELM99603311AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603312	-	ELM99603312AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603313	-	ELM99603313AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603321	-	ELM99603321AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603322	-	ELM99603322AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603323	-	ELM99603323AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603331	-	ELM99603331AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603332	-	ELM99603332AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603333	-	ELM99603333AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603341	-	ELM99603341AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603342	-	ELM99603342AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603343	-	ELM99603343AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603351	-	ELM99603351AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603352	-	ELM99603352AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603353	-	ELM99603353AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603361	-	ELM99603361AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603362	-	ELM99603362AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603363	-	ELM99603363AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603371	-	ELM99603371AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603372	-	ELM99603372AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603373	-	ELM99603373AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603381	-	ELM99603381AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603382	-	ELM99603382AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603383	-	ELM99603383AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603391	-	ELM99603391AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603392	-	ELM99603392AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603393	-	ELM99603393AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/3.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603401	-	ELM99603401AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603402	-	ELM99603402AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603403	-	ELM99603403AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603411	-	ELM99603411AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603412	-	ELM99603412AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603413	-	ELM99603413AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603421	-	ELM99603421AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603422	-	ELM99603422AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603423	-	ELM99603423AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603431	-	ELM99603431AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603432	-	ELM99603432AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603433	-	ELM99603433AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603441	-	ELM99603441AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603442	-	ELM99603442AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603443	-	ELM99603443AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603451	-	ELM99603451AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603452	-	ELM99603452AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603453	-	ELM99603453AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603461	-	ELM99603461AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603462	-	ELM99603462AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603463	-	ELM99603463AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603471	-	ELM99603471AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603472	-	ELM99603472AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603473	-	ELM99603473AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603481	-	ELM99603481AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603482	-	ELM99603482AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603483	-	ELM99603483AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603491	-	ELM99603491AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603492	-	ELM99603492AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603493	-	ELM99603493AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/4.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603501	-	ELM99603501AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603502	-	ELM99603502AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603503	-	ELM99603503AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603511	-	ELM99603511AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.1V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603512	-	ELM99603512AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.1V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603513	-	ELM99603513AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.1V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
99603521	-	ELM99603521AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.2V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603522	-	ELM99603522AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.2V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603523	-	ELM99603523AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.2V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603531	-	ELM99603531AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.3V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603532	-	ELM99603532AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.3V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603533	-	ELM99603533AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.3V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603541	-	ELM99603541AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.4V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603542	-	ELM99603542AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.4V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603543	-	ELM99603543AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.4V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603551	-	ELM99603551AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.5V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603552	-	ELM99603552AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.5V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603553	-	ELM99603553AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.5V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603561	-	ELM99603561AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.6V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603562	-	ELM99603562AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.6V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603563	-	ELM99603563AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.6V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603571	-	ELM99603571AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.7V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603572	-	ELM99603572AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.7V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603573	-	ELM99603573AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.7V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603581	-	ELM99603581AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.8V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603582	-	ELM99603582AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.8V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603583	-	ELM99603583AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.8V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603591	-	ELM99603591AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.9V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603592	-	ELM99603592AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.9V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603593	-	ELM99603593AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/5.9V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
99603601	-	ELM99603601AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/6.0V±2%, 300mA, +CE1	TSSOP-8	55gt	VR33	8q	Elm
99603602	-	ELM99603602AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/6.0V±2%, 300mA, +CE1, -CE2	TSSOP-8	55gr	VR32	8q	Elm
99603603	-	ELM99603603AW	LVR-IC	LDO, Dual out, Vout1/Vout2=6.0V/6.0V±2%, 300mA, +CE1, +CE2	TSSOP-8	55gr	VR32	8q	Elm
9A	-	R1161D091A	LVR-IC	LDO, 0.9V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
9B	-	R1161D191A	LVR-IC	LDO, 1.9V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
9C	-	R1161D291A	LVR-IC	LDO, 2.9V±2%, 350mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
9E	-	R1161D091B	LVR-IC	LDO, 0.9V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
9F	-	R1161D191B	LVR-IC	LDO, 1.9V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
9G	-	R1161D291B	LVR-IC	LDO, 2.9V±2%, 350mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
9J	-	R1161D091D	LVR-IC	LDO, 0.9V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
9K	-	R1161D191D	LVR-IC	LDO, 1.9V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
9L	-	R1161D291D	LVR-IC	LDO, 2.9V±2%, 350mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
A0	-	TK65910M	Lin-IC	Fluorescent lamp driver, 32mA, 175Hz	SOP-6	33zi	-	7b	Tok
A0-	-	RT9167B-33PF	LVR-IC	LDO, 3,3V±2%, 600mA, +CE	MSOP-8	55	VR7	8d	Rct
A00	-	74AHC2G00DC	CMOS-Log	Dual 2-input NAND gates	SOT765-1	55	Log50	8d	Nxp
A00	-	74AHC2G00DP	CMOS-Log	Dual 2-input NAND gates	SOT505-2	47	Log50	8d	Nxp
A00	-	HD74ALVC2G00US	CMOS-Log	Dual 2-input NAND gates	SSOP-8	47	Log50	8c	Ren
A01C	-	R1230D001C	DC-DC-IC	PWM step-down, adjustable, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A01C	-	R5210D001C	DC-DC-IC	PWM step-down, Vr=3.4V, DC/DCout=2.7V, Vdet= 4.2V	HSON-6	dc2	-	7ea	Ric
A01D	-	R1230D001D	DC-DC-IC	PWM step-down, adjustable, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A02	-	HD74ALVC2G02US	CMOS-Log	Dual 2-input NOR gates	SSOP-8	47	Log53	8c	Ren
A02C	-	R5210D002C	DC-DC-IC	PWM step-down, Vr=3.3V, DC/DCout=2.5V, Vdet= 4V	HSON-6	dc2	-	7ea	Ric
A03C	-	R5210D003C	DC-DC-IC	PWM step-down, Vr=3.3V, DC/DCout=2.5V, Vdet= 4.2V	HSON-6	dc2	-	7ea	Ric
A04	-	74AHC3G04DC	CMOS-Log	Triple inverters	SOT765-1	55	Log56	8d	Nxp
A04	-	74AHC3G04DP	CMOS-Log	Triple inverters	SOT505-2	47	Log56	8d	Nxp
A04	-	HD74ALVC2G04US	CMOS-Log	Triple inverters	SSOP-8	47	Log56	8c	Ren
A05C	-	R5210D005C	DC-DC-IC	PWM step-down, Vr=3.3V, DC/DCout=1.8V, Vdet= 4.2V	HSON-6	dc2	-	7ea	Ric
A06	-	HD74ALVC2G06US	CMOS-Log	Triple inverters (ODO)	SSOP-8	47	Log72	8c	Ren
A06C	-	R5210D006C	DC-DC-IC	PWM step-down, Vr=3.3V, DC/DCout=1.8V, Vdet= 4V	HSON-6	dc2	-	7ea	Ric
A07	-	HD74ALVC2G07US	CMOS-Log	Triple noninverting buffers/drivers (ODO)	SSOP-8	47	Log73	8c	Ren
A0710	-	APA0710XA	Lin-IC	AF PA, BTL, 2.6..5.5V, 1.1W(5V/8Ω), shutdown	SSOP-8-P	47	AFP23	8d	Anp
A0711	-	APA0711XA	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.1W(5V/8Ω), shutdown	SSOP-8-P	47	AFP12	8d	Anp
A07C	-	R5210D007C	DC-DC-IC	PWM step-down, Vr=3.3V, DC/DCout=1.5V, Vdet= 4.2V	HSON-6	dc2	-	7ea	Ric
A08	-	74AHC2G08DC	CMOS-Log	Dual 2-input AND gates	SOT765-1	55	Log51	8d	Nxp
A08	-	74AHC2G08DP	CMOS-Log	Dual 2-input AND gates	SOT505-2	47	Log51	8d	Nxp
A08	-	HD74ALVC2G08US	CMOS-Log	Dual 2-input AND gates	SSOP-8	47	Log51	8c	Ren
A08C	-	R5210D008C	DC-DC-IC	PWM step-down, Vr=3.3V, DC/DCout=1.5V, Vdet= 4V	HSON-6	dc2	-	7ea	Ric
A09A	-	R3111D091A	Vdet-IC	0.9V±2%, -Reset PPO	SON1612-6	vd8	VD6	7e	Ric
A09C	-	R3111D091C	Vdet-IC	0.9V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A09C	-	R5210D009C	DC-DC-IC	PWM step-down, Vr=2.5V, DC/DCout=1.8V, Vdet=3 V	HSON-6	dc2	-	7ea	Ric
A1	-	TK65911M	Lin-IC	Fluorescent lamp driver, 32mA, 200Hz	SOP-6	33zi	-	7b	Tok
A1-	-	BAW56S	Si-diode	Quad, Fast Sw, 90V, 250mA, 250mW, Vf<1.25V(150mA), 2pF, <6ns	SOT-363	33	D8	7b	NxH
A10A	-	R3111D101A	Vdet-IC	1V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A10C	-	R3111D101C	Vdet-IC	1V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A10C	-	R5210D010C	DC-DC-IC	PWM step-down, Vr=2.5V, DC/DCout=1.5V, Vdet= 3V	HSON-6	dc2	-	7ea	Ric
A11A	-	R3111D111A	Vdet-IC	1.1V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A11C	-	R3111D111C	Vdet-IC	1.1V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A11C	-	R5210D011C	DC-DC-IC	PWM step-down, Vr=2.6V, DC/DCout=1.6V, Vdet= 4.2V	HSON-6	dc2	-	7ea	Ric
A12A	-	R1230D121A	DC-DC-IC	PWM step-down, 1.2V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A12A	-	R3111D121A	Vdet-IC	1.2V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A12B	-	R1230D121B	DC-DC-IC	PWM step-down, 1.2V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A12C	-	R3111D121C	Vdet-IC	1.2V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A12C	-	R5210D012C	DC-DC-IC	PWM step-down, Vr=2.5V, DC/DCout=3.3V, Vdet= 3.7V	HSON-6	dc2	-	7ea	Ric
A13A	-	R1230D131A	DC-DC-IC	PWM step-down, 1.3V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A13A	-	R3111D131A	Vdet-IC	1.3V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A13B	-	R1230D131B	DC-DC-IC	PWM step-down, 1.3V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A13C	-	R3111D131C	Vdet-IC	1.3V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A14	-	74AHC3G14DC	CMOS-Log	Triple Schmitt-trigger inverters	SOT765-1	55	Log57	8d	Nxp
A14	-	74AHC3G14DP	CMOS-Log	Triple Schmitt-trigger inverters	SOT505-2	47	Log57	8d	Nxp
A14	-	HD74ALVC2G14US	CMOS-Log	Triple Schmitt-trigger inverters	SSOP-8	47	Log57	8c	Ren
A14A	-	R1230D141A	DC-DC-IC	PWM step-down, 1.4V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A14A	-	R3111D141A	Vdet-IC	1.4V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A14B	-	R1230D141B	DC-DC-IC	PWM step-down, 1.4V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A14C	-	R3111D141C	Vdet-IC	1.4V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A15A	-	R1170S151A	LVR-IC	LDO, 1.5V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A15A	-	R1230D151A	DC-DC-IC	PWM step-down, 1.5V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A15A	-	R3111D151A	Vdet-IC	1.5V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A15B	-	R1170S151B	LVR-IC	LDO, 1.5V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A15B	-	R1230D151B	DC-DC-IC	PWM step-down, 1.5V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A15C	-	R3111D151C	Vdet-IC	1.5V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A16A	-	R1170S161A	LVR-IC	LDO, 1.6V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A16A	-	R1230D161A	DC-DC-IC	PWM step-down, 1.6V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A16A	-	R3111D161A	Vdet-IC	1.6V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A16B	-	R1170S161B	LVR-IC	LDO, 1.6V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A16B	-	R1230D161B	DC-DC-IC	PWM step-down, 1.6V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A16C	-	R3111D161C	Vdet-IC	1.6V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A17A	-	R1170S171A	LVR-IC	LDO, 1.7V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A17A	-	R1230D171A	DC-DC-IC	PWM step-down, 1.7V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A17A	-	R3111D171A	Vdet-IC	1.7V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A17B	-	R1170S171B	LVR-IC	LDO, 1.7V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A17B	-	R1230D171B	DC-DC-IC	PWM step-down, 1.7V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A17C	-	R3111D171C	Vdet-IC	1.7V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A18A	-	R1170S181A	LVR-IC	LDO, 1.8V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A18A	-	R1230D181A	DC-DC-IC	PWM step-down, 1.8V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A18A	-	R3111D181A	Vdet-IC	1.8V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A18B	-	R1170S181B	LVR-IC	LDO, 1.8V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A18B	-	R1230D181B	DC-DC-IC	PWM step-down, 1.8V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A18C	-	R3111D181C	Vdet-IC	1.8V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A19A	-	R1170S191A	LVR-IC	LDO, 1.9V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A19A	-	R1230D191A	DC-DC-IC	PWM step-down, 1.9V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A19A	-	R3111D191A	Vdet-IC	1.9V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A19B	-	R1170S191B	LVR-IC	LDO, 1.9V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A19B	-	R1230D191B	DC-DC-IC	PWM step-down, 1.9V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A19C	-	R3111D191C	Vdet-IC	1.9V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A1C	-	SSM2301RMZ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 1.4W(5V/8Ω), shutdown	MSOP-8	55	-	8d	Ad
A1p	-	BAW56S	Si-diode	Quad, Fast Sw, 90V, 250mA, 250mW, Vf<1.25V(150mA), 2pF, <6ns	SOT-363	33	D8	7b	NxH
A1s	-	BAW56S	Si-diode	Quad, Fast Sw, 90V, 250mA, 250mW, Vf<1.25V(150mA), 2pF, <6ns	SOT-363	33	D8	7l	Inf
A1t	-	BAW56S	Si-diode	Quad, Fast Sw, 90V, 250mA, 250mW, Vf<1.25V(150mA), 2pF, <6ns	SOT-363	33	D8	7b	NxM
A1W	-	BAW56S	Si-diode	Quad, Fast Sw, 90V, 250mA, 250mW, Vf<1.25V(150mA), 2pF, <6ns	SOT-363	33	D8	7b	NxC
a2	-	74AUP1G3208GW	CMOS-Log	3-input OR-AND gate	SOT-363	33	Log46	7b	Nxp
A2	-	MBT3906DW	Si-pnp	Dual, AF, 40V, 200mA, 150mW, B=60..300, >250MHz	SOT-363	33	T10	7b	Ons
A2	-	TK65912M	Lin-IC	Fluorescent lamp driver, 32mA, 225Hz	SOP-6	33zi	-	7b	Tok
A20A	-	R1170S201A	LVR-IC	LDO, 2.0V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A20A	-	R1230D201A	DC-DC-IC	PWM step-down, 2V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A20A	-	R3111D201A	Vdet-IC	2V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A20B	-	R1170S201B	LVR-IC	LDO, 2.0V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A20B	-	R1230D201B	DC-DC-IC	PWM step-down, 2V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A20C	-	R3111D201C	Vdet-IC	2V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A21A	-	R1170S211A	LVR-IC	LDO, 2.1V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A21A	-	R1230D211A	DC-DC-IC	PWM step-down, 2.1V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A21A	-	R3111D211A	Vdet-IC	2.1V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A21B	-	R1170S211B	LVR-IC	LDO, 2.1V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A21B	-	R1230D211B	DC-DC-IC	PWM step-down, 2.1V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A21C	-	R3111D211C	Vdet-IC	2.1V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A22A	-	R1170S221A	LVR-IC	LDO, 2.2V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A22A	-	R1230D221A	DC-DC-IC	PWM step-down, 2.2V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A22A	-	R3111D221A	Vdet-IC	2.2V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A22B	-	R1170S221B	LVR-IC	LDO, 2.2V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A22B	-	R1230D221B	DC-DC-IC	PWM step-down, 2.2V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A22C	-	R3111D221C	Vdet-IC	2.2V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A23A	-	R1170S231A	LVR-IC	LDO, 2.3V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A23A	-	R1230D231A	DC-DC-IC	PWM step-down, 2.3V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A23A	-	R3111D231A	Vdet-IC	2.3V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A23B	-	R1170S231B	LVR-IC	LDO, 2.3V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A23B	-	R1230D231B	DC-DC-IC	PWM step-down, 2.3V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A23C	-	R3111D231C	Vdet-IC	2.3V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A241	-	74AHC2G241DP	CMOS-Log	Dual bus buffer non-inverted with 3-state output	SOT505-2	47	Log60	8d	Nxp
A24A	-	R1170S241A	LVR-IC	LDO, 2.4V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A24A	-	R1230D241A	DC-DC-IC	PWM step-down, 2.4V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A24A	-	R3111D241A	Vdet-IC	2.4V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A24B	-	R1170S241B	LVR-IC	LDO, 2.4V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A24B	-	R1230D241B	DC-DC-IC	PWM step-down, 2.4V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A24C	-	R3111D241C	Vdet-IC	2.4V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A25	-	74AHC2G125DC	CMOS-Log	Dual bus buffer with 3-state output	SOT765-1	55	Log54	8d	Nxp
A25	-	74AHC2G125DP	CMOS-Log	Dual bus buffer with 3-state output	SOT505-2	47	Log54	8d	Nxp
A25	-	HD74ALVC2G125US	CMOS-Log	Dual bus buffer with 3-state output	SSOP-8	47	Log54	8c	Ren
A25A	-	R1170S251A	LVR-IC	LDO, 2.5V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A25A	-	R1230D251A	DC-DC-IC	PWM step-down, 2.5V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A25A	-	R3111D251A	Vdet-IC	2.5V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A25B	-	R1170S251B	LVR-IC	LDO, 2.5V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A25B	-	R1230D251B	DC-DC-IC	PWM step-down, 2.5V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A25C	-	R3111D251C	Vdet-IC	2.5V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A26	-	74AHC2G126DC	CMOS-Log	Dual bus buffer with 3-state output	SOT765-1	55	Log55	8d	Nxp
A26	-	74AHC2G126DP	CMOS-Log	Dual bus buffer with 3-state output	SOT505-2	47	Log55	8d	Nxp
A26	-	HD74ALVC2G126US	CMOS-Log	Dual bus buffer with 3-state output	SSOP-8	47	Log55	8c	Ren
A26A	-	R1170S261A	LVR-IC	LDO, 2.6V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A26A	-	R1230D261A	DC-DC-IC	PWM step-down, 2.6V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A26A	-	R3111D261A	Vdet-IC	2.6V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A26B	-	R1170S261B	LVR-IC	LDO, 2.6V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A26B	-	R1230D261B	DC-DC-IC	PWM step-down, 2.6V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A26C	-	R3111D261C	Vdet-IC	2.6V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A27A	-	R1170S271A	LVR-IC	LDO, 2.7V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A27A	-	R1230D271A	DC-DC-IC	PWM step-down, 2.7V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A27A	-	R3111D271A	Vdet-IC	2.7V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A27B	-	R1170S271B	LVR-IC	LDO, 2.7V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A27B	-	R1230D271B	DC-DC-IC	PWM step-down, 2.7V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A27C	-	R3111D271C	Vdet-IC	2.7V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A28A	-	R1170S281A	LVR-IC	LDO, 2.8V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A28A	-	R1230D281A	DC-DC-IC	PWM step-down, 2.8V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A28A	-	R3111D281A	Vdet-IC	2.8V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A28B	-	R1170S281B	LVR-IC	LDO, 2.8V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A28B	-	R1230D281B	DC-DC-IC	PWM step-down, 2.8V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A28C	-	R3111D281C	Vdet-IC	2.8V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A29A	-	R1170S291A	LVR-IC	LDO, 2.9V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A29A	-	R1230D291A	DC-DC-IC	PWM step-down, 2.9V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A29A	-	R3111D291A	Vdet-IC	2.9V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A29B	-	R1170S291B	LVR-IC	LDO, 2.9V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A29B	-	R1230D291B	DC-DC-IC	PWM step-down, 2.9V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A29C	-	R3111D291C	Vdet-IC	2.9V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
a2P	-	74AUP2G157DC	CMOS-Log	2-input multiplexer	SOT765-1	55	Log66	8d	Nxp
A3	-	MBT3906DW	Si-pnp	Dual, GP, 40V, 200mA, 250mW, B=60..300, >250MHz	SOT-363	33	T10	7b	Wtr
A3	-	NC7S00L6	CMOS-Log	2-input NAND gate	MPAK-6	33	Log1	7b	F
A3	-	TK65913M	Lin-IC	Fluorescent lamp driver, 32mA, 250Hz	SOP-6	33zi	-	7b	Tok
A3010	-	APA3010XA	Lin-IC	AF PA, BTL, 2.5..5.5V, 3.3W(5V/3Ω), shutdown	SSOP-8-P	47	AFP11	8d	Anp
A3011	-	APA3011XA	Lin-IC	AF PA, BTL, 2.5..5.5V, 3.3W(5V/3Ω), shutdown	SSOP-8-P	47	AFP12	8d	Anp
A3012	-	APA3012XA	Lin-IC	AF PA, BTL, 2.5..5.5V, 3.3W(5V/3Ω), shutdown	SSOP-8-P	47	AFP11	8d	Anp
A30A	-	R1170S301A	LVR-IC	LDO, 3.0V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A30A	-	R1230D301A	DC-DC-IC	PWM step-down, 3V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A30A	-	R3111D301A	Vdet-IC	3±V2.0%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A30B	-	R1170S301B	LVR-IC	LDO, 3.0V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A30B	-	R1230D301B	DC-DC-IC	PWM step-down, 3V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A30C	-	R3111D301C	Vdet-IC	3.0V±2.0%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A30C	-	R3112D301C	Vdet-IC	3.0V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A31A	-	R1170S311A	LVR-IC	LDO, 3.1V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A31A	-	R1230D311A	DC-DC-IC	PWM step-down, 3.1V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A31A	-	R3111D311A	Vdet-IC	3.1V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A31B	-	R1170S311B	LVR-IC	LDO, 3.1V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A31B	-	R1230D311B	DC-DC-IC	PWM step-down, 3.1V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A31C	-	R3111D311C	Vdet-IC	3.1V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A31C	-	R3112D311C	Vdet-IC	3.1V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A32	-	74AHC2G32DC	CMOS-Log	Dual 2-input OR gates	SOT765-1	55	Log52	8d	Nxp
A32	-	74AHC2G32DP	CMOS-Log	Dual 2-input OR gates	SOT505-2	47	Log52	8d	Nxp
A32	-	HD74ALVC2G32US	CMOS-Log	Dual 2-input OR gates	SSOP-8	47	Log52	8c	Ren
A32	-	OPA632N	Op-IC	Single-supply, 3.0..10.0V, 100V/µs	SOT-23-6	33opc	OP1	7b	Bb
A32A	-	R1170S321A	LVR-IC	LDO, 3.2V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A32A	-	R1230D321A	DC-DC-IC	PWM step-down, 3.2V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A32A	-	R3111D321A	Vdet-IC	3.2V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A32B	-	R1170S321B	LVR-IC	LDO, 3.2V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A32B	-	R1230D321B	DC-DC-IC	PWM step-down, 3.2V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A32C	-	R3111D321C	Vdet-IC	3.2V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A32C	-	R3112D321C	Vdet-IC	3.2V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A33A	-	R1170S331A	LVR-IC	LDO, 3.3V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A33A	-	R1230D331A	DC-DC-IC	PWM step-down, 3.3V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A33A	-	R3111D331A	Vdet-IC	3.3V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A33B	-	R1170S331B	LVR-IC	LDO, 3.3V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A33B	-	R1230D331B	DC-DC-IC	PWM step-down, 3.3V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A33C	-	R3111D331C	Vdet-IC	3.3V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A33C	-	R3112D331C	Vdet-IC	3.3V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A34	-	HD74ALVC2G34US	CMOS-Log	Triple non-inverter buffers	SSOP-8	47	Log69	8c	Ren
A34	-	OPA234E	Op-IC	Precision, Lo-power, ±1.35..±18V, Icc0=250µA, Vofs=±100µV	MSOP-8	47ope	OP2	8d	Bb
A34	-	OPA234EA	Op-IC	Precision, Lo-power, ±1.35..±18V, Icc0=250µA, Vofs=±40µV	MSOP-8	47ope	OP2	8d	Bb
A34A	-	R1170S341A	LVR-IC	LDO, 3.4V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A34A	-	R1230D341A	DC-DC-IC	PWM step-down, 3.4V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A34A	-	R3111D341A	Vdet-IC	3.4V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A34B	-	R1170S341B	LVR-IC	LDO, 3.4V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A34B	-	R1230D341B	DC-DC-IC	PWM step-down, 3.4V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A34C	-	R3111D341C	Vdet-IC	3.4V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A34C	-	R3112D341C	Vdet-IC	3.4V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A35	-	OPA635N	Op-IC	Wide-band, single-supply +3..+5V, 150MHz, Iout=80mA	SOT-23-6	33opc	OP1	7b	Bb
A35A	-	R1170S351A	LVR-IC	LDO, 3.5V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A35A	-	R1230D351A	DC-DC-IC	PWM step-down, 3.5V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A35A	-	R3111D351A	Vdet-IC	3.5V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A35B	-	R1170S351B	LVR-IC	LDO, 3.5V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A35B	-	R1230D351B	DC-DC-IC	PWM step-down, 3.5V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A35C	-	R3111D351C	Vdet-IC	3.5V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A35C	-	R3112D351C	Vdet-IC	3.5V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A36A	-	R1170S361A	LVR-IC	LDO, 3.6V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A36A	-	R1230D361A	DC-DC-IC	PWM step-down, 3.6V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A36A	-	R3111D361A	Vdet-IC	3.6V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A36B	-	R1170S361B	LVR-IC	LDO, 3.6V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A36B	-	R1230D361B	DC-DC-IC	PWM step-down, 3.6V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A36C	-	R3111D361C	Vdet-IC	3.6V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A36C	-	R3112D361C	Vdet-IC	3.6V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A37A	-	R1170S371A	LVR-IC	LDO, 3.7V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A37A	-	R1230D371A	DC-DC-IC	PWM step-down, 3.7V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A37A	-	R3111D371A	Vdet-IC	3.7V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A37B	-	R1170S371B	LVR-IC	LDO, 3.7V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A37B	-	R1230D371B	DC-DC-IC	PWM step-down, 3.7V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A37C	-	R3111D371C	Vdet-IC	3.7V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A37C	-	R3112D371C	Vdet-IC	3.7V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
a38	-	74AUP2G38DC	CMOS-Log	Dual 2-input NAND gate (ODO)	SOT765-1	55	Log62	8d	Nxp
A38A	-	R1170S381A	LVR-IC	LDO, 3.8V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A38A	-	R1230D381A	DC-DC-IC	PWM step-down, 3.8V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A38A	-	R3111D381A	Vdet-IC	3.8V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A38B	-	R1170S381B	LVR-IC	LDO, 3.8V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A38B	-	R1230D381B	DC-DC-IC	PWM step-down, 3.8V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A38C	-	R3111D381C	Vdet-IC	3.8V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A38C	-	R3112D381C	Vdet-IC	3.8V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A39A	-	R1170S391A	LVR-IC	LDO, 3.9V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A39A	-	R1230D391A	DC-DC-IC	PWM step-down, 3.9V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A39A	-	R3111D391A	Vdet-IC	3.9V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A39B	-	R1170S391B	LVR-IC	LDO, 3.9V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A39B	-	R1230D391B	DC-DC-IC	PWM step-down, 3.9V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A39C	-	R3111D391C	Vdet-IC	3.9V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A39C	-	R3112D391C	Vdet-IC	3.9V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
a4	-	74AUP1Z04GW	CMOS-Log	X-tal driver with enable and internal resistor	SOT-363	33	Log76	7b	Nxp

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A4	-	NLAS323US	Lin-IC	Dual SPST analog switch, 20Ω(5V)	US8	47	-	8b	Ons
A4	-	TK65914M	Lin-IC	Fluorescent lamp driver, 32mA, 275Hz	SOP-6	33zi	-	7b	Tok
A40	-	HD74ALVC2G240US	CMOS-Log	Dual bus buffer inverted with 3-state output	SSOP-8	47	Log67	8c	Ren
A40A	-	OPA2340EA	Op-IC	Dual, single-supply, Rail-to-Rail, 2.5..5.5V, 5.5MHz, 6V/µs	MSOP-8	47opd	OP4	8d	Bb
A40A	-	R1170S401A	LVR-IC	LDO, 4.0V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A40A	-	R1230D401A	DC-DC-IC	PWM step-down, 4V±2%, 800mA, 500kHz	SON-8	ej	-	8e	Ric
A40A	-	R3111D401A	Vdet-IC	4V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A40B	-	R1170S401B	LVR-IC	LDO, 4.0V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A40B	-	R1230D401B	DC-DC-IC	PWM step-down, 4V±2%, 800mA, 800kHz	SON-8	ej	-	8e	Ric
A40C	-	R3111D401C	Vdet-IC	4.0V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A40C	-	R3112D401C	Vdet-IC	4.0V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A41	-	74AHC2G241DC	CMOS-Log	Dual bus buffer non-inverted with 3-state output	SOT765-1	55	Log60	8d	Nxp
A41	-	HD74ALVC2G241US	CMOS-Log	Dual bus buffer non-inverted with 3-state output	SSOP-8	47	Log60	8c	Ren
A41A	-	R1170S411A	LVR-IC	LDO, 4.1V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A41A	-	R3111D411A	Vdet-IC	4.1V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A41B	-	R1170S411B	LVR-IC	LDO, 4.1V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A41C	-	R3111D411C	Vdet-IC	4.1V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A41C	-	R3112D411C	Vdet-IC	4.1V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A42A	-	R1170S421A	LVR-IC	LDO, 4.2V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A42A	-	R3111D421A	Vdet-IC	4.2V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A42B	-	R1170S421B	LVR-IC	LDO, 4.2V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A42C	-	R3111D421C	Vdet-IC	4.2V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A42C	-	R3112D421C	Vdet-IC	4.2V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A43A	-	R1170S431A	LVR-IC	LDO, 4.3V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A43A	-	R3111D431A	Vdet-IC	4.3V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A43B	-	R1170S431B	LVR-IC	LDO, 4.3V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A43C	-	R3111D431C	Vdet-IC	4.3V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A43C	-	R3112D431C	Vdet-IC	4.3V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A44	-	OPA2244EA	Op-IC	Dual, single-supply, 2.2..36V, 430kHz	MSOP-8	33opd	OP4	8d	Bb
A44A	-	R1170S441A	LVR-IC	LDO, 4.4V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A44A	-	R3111D441A	Vdet-IC	4.4V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A44B	-	R1170S441B	LVR-IC	LDO, 4.4V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A44C	-	R3111D441C	Vdet-IC	4.4V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A44C	-	R3112D441C	Vdet-IC	4.4V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A45	-	HD74ALVC2G245US	CMOS-Log	Dual bus transceivers with 3-state output	SSOP-8	47	Log74	8c	Ren
A45A	-	R1170S451A	LVR-IC	LDO, 4.5V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A45A	-	R3111D451A	Vdet-IC	4.5V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A45B	-	R1170S451B	LVR-IC	LDO, 4.5V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A45C	-	R3111D451C	Vdet-IC	4.5V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A45C	-	R3112D451C	Vdet-IC	4.5V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A46A	-	R1170S461A	LVR-IC	LDO, 4.6V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A46A	-	R3111D461A	Vdet-IC	4.6V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A46B	-	R1170S461B	LVR-IC	LDO, 4.6V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A46C	-	R3111D461C	Vdet-IC	4.6V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A46C	-	R3112D461C	Vdet-IC	4.6V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A47A	-	R1170S471A	LVR-IC	LDO, 4.7V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A47A	-	R3111D471A	Vdet-IC	4.7V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A47B	-	R1170S471B	LVR-IC	LDO, 4.7V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A47C	-	R3111D471C	Vdet-IC	4.7V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A47C	-	R3112D471C	Vdet-IC	4.7V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A4890	-	EUA4890M	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Eut
A48A	-	R1170S481A	LVR-IC	LDO, 4.8V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A48A	-	R3111D481A	Vdet-IC	4.8V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A48B	-	R1170S481B	LVR-IC	LDO, 4.8V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A48C	-	R3111D481C	Vdet-IC	4.8V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A48C	-	R3112D481C	Vdet-IC	4.8V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A4990D	-	LY8892UB	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(5V/4Ω), shutdown	MSOP-10	60	AFP26	8d	Ltk
A4990M	-	AUD4990MS08	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(5V /4Ω), shutdown	MSOP-8	55	AFP12	8d	Axp
A49A	-	R1170S491A	LVR-IC	LDO, 4.9V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric
A49A	-	R3111D491A	Vdet-IC	4.9V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A49B	-	R1170S491B	LVR-IC	LDO, 4.9V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A49C	-	R3111D491C	Vdet-IC	4.9V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A49C	-	R3112D491C	Vdet-IC	4.9V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A4s	-	BAV70S	Si-diode	Quad, Sw, 80V, 200mA, Vf<1.25V(150mA), <4ns	SOT-363	33	D7	7b	Inf
A4s	-	BAV70U	Si-diode	Quad, Sw, 75V, 150mA, 200mW, Vf<1.25V, <4ns	SOT-457	33	D7	7b	Sie
A4t	-	BAV70S	Si-diode	Quad, Sw, 80V, 200mA, Vf<1.25V(150mA), <4ns	SOT-363	33	D7	7b	Nxp
A5	-	TK65915M	Lin-IC	Fluorescent lamp driver, 32mA, 300Hz	SOP-6	33zi	-	7b	Tok
A5-	-	BGA2011	MMIC	RF amp, DC..900MHz, 19dB (50Ω), Vcc=4.5V	SOT-363	33ae	A2	7b	Phi
A5004	-	AUD5004MS08	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(5V/4Ω), mute, shutdown	MSOP-8	55	-	8d	Axp
A50A	-	R1170S501A	LVR-IC	LDO, 5.0V±2%, 800mA, -CE	HSOP-6J	vrk	VR4	7h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A50A	-	R3111D501A	Vdet-IC	5V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A50B	-	R1170S501B	LVR-IC	LDO, 5.0V±2%, 800mA, +CE	HSOP-6J	vrk	VR4	7h	Ric
A50C	-	R3111D501C	Vdet-IC	5.0V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A50C	-	R3112D501C	Vdet-IC	5.0V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
A51A	-	R3111D511A	Vdet-IC	5.1V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A51C	-	R3111D511C	Vdet-IC	5.1V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A52A	-	R3111D521A	Vdet-IC	5.2V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A52C	-	R3111D521C	Vdet-IC	5.2V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A53	-	HD74ALVC2G53US	CMOS-Log	2-channel analog multiplexer/demultiplexer	SSOP-8	47	Log58	8c	Ren
A53A	-	R3111D531A	Vdet-IC	5.3V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A53C	-	R3111D531C	Vdet-IC	5.3V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A54A	-	R3111D541A	Vdet-IC	5.4V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A54C	-	R3111D541C	Vdet-IC	5.4V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A55A	-	R3111D551A	Vdet-IC	5.5V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A55C	-	R3111D551C	Vdet-IC	5.5V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A56A	-	R3111D561A	Vdet-IC	5.6V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A56C	-	R3111D561C	Vdet-IC	5.6V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A57	-	HD74ALVC2G157US	CMOS-Log	2-input multiplexer	SSOP-8	47	Log66	8c	Ren
A57A	-	R3111D571A	Vdet-IC	5.7V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A57C	-	R3111D571C	Vdet-IC	5.7V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A58A	-	R3111D581A	Vdet-IC	5.8V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A58C	-	R3111D581C	Vdet-IC	5.8V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A59A	-	R3111D591A	Vdet-IC	5.9V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A59C	-	R3111D591C	Vdet-IC	5.9V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A6	-	TK65916M	Lin-IC	Fluorescent lamp driver, 32mA, 325Hz	SOP-6	33zi	-	7b	Tok
A6-	-	BGA2012	MMIC	RF amp, DC..1.9GHz, 16dB (50Ω), Vcc=4.5V	SOT-363	33ae	A2	7b	Phi
A6019A	-	EUA6019Q	Lin-IC	AF PA, BTL, 4..5.5V, 2x3W(4V/3Ω), shutdown, DC volume	TSSOP-24	60	-	8d	Eut
A6027A	-	EUA6027Q	Lin-IC	AF PA, BTL, 4.5..5.5V, 2x2W(5V/3Ω), shutdown	TSSOP-20	60	AFP14	8d	Eut
A60A	-	R3111D601A	Vdet-IC	6V±2%, -Reset PPO	SON1612-6	vd8	VD7	7e	Ric
A60C	-	R3111D601C	Vdet-IC	6V±2%, -Reset ODO	SON1612-6	vd8	VD6	7e	Ric
A6201	-	EUA6201M	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.36W(5V/8Ω), shutdown	MSOP-8	55	AFP22	8d	Eut
A6204	-	EUA6204M	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.6W(5V/8Ω), shutdown	SSOP-8	47	AFP22	8d	Eut
A6210	-	EUA6210M	Lin-IC	AF PA, BTL, 2.2..5.5V, 2x67mW(5V/16Ω), shutdown	SSOP-8	47	AFP29	8d	Eut
A6278F	-	KIA6278F	Lin-IC	AF PA, 2..10V, 720mW(5V/4Ω), shutdown	SOP-8	47	AFP4	8d	Kec
A6412A	-	EUA6412Q	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(3V/4Ω), shutdown	TSSOP-24	60	-	8d	Eut
A66	-	HD74ALVC2G66US	CMOS-Log	2-channel analog switch	SSOP-8	47	Log68	8c	Ren
A6s	-	BAS16S	Si-diode	Triple, Sw, Fast, 80V, 200mA, 250mW, <6ns	SOT-363	33dd	-	7l	Inf
A6s	-	BAS16U	Si-diode	Triple, Sw, Fast, 80V, 200mA, 250mW, <6ns	SC-74	33dd	-	7b	Inf
A7	-	NLAS324US	Lin-IC	Dual SPST analog switch, 20Ω(5V)	US8	47	-	8b	Ons
A7	-	OPA2337NA	Op-IC	Dual, CMOS, single-supply, 2.5..5.5V, 120dB, 3MHz	SOT-23-8	47opd	OP4	8d	Bb
A7	-	TK65917M	Lin-IC	Fluorescent lamp driver, 32mA, 350Hz	SOP-6	33zi	-	7b	Tok
A7-	-	BAV756S	Si-diode	Quad, Fast Sw, 90V, 250mA, 250mW, Vf<1.25V(150mA), 2pF, <6ns	SOT-363	33	D13	7b	NxH
A74	-	HD74ALVC2G74US	CMOS-Log	D-type flip-flop with preset and clear	SSOP-8	47	Log59	8c	Ren
A7p	-	BAV756S	Si-diode	Quad, Fast Sw, 90V, 250mA, 250mW, Vf<1.25V(150mA), 2pF, <6ns	SOT-363	33	D13	7b	NxH
A7t	-	BAV756S	Si-diode	Quad, Fast Sw, 90V, 250mA, 250mW, Vf<1.25V(150mA), 2pF, <6ns	SOT-363	33	D13	7b	NxM
A7W	-	BAV756S	Si-diode	Quad, Fast Sw, 90V, 250mA, 250mW, Vf<1.25V(150mA), 2pF, <6ns	SOT-363	33	D13	7b	NxC
A8	-	OPA2338NA	Op-IC	Dual, CMOS, single-supply, 2.5..5.5V, 120dB, 12.5MHz	SOT-23-8	47opd	OP4	8d	Bb
A8	-	R1160D081A	LVR-IC	LDO, 0.8V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
A8	-	TK65918M	Lin-IC	Fluorescent lamp driver, 32mA, 375Hz	SOP-6	33zi	-	7b	Tok
A8-	-	RT9167B-25PF	LVR-IC	LDO, 2.5V±2%, 600mA, +CE	MSOP-8	55	VR7	8d	Rct
A86	-	HD74ALVC2G86US	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	SSOP-8	47	Log65	8c	Ren
A86A	-	LMV932MM	Op-IC	Dual, Lo-power, Vcc=1.8..5V, 1.4MHz, 0.35V/µs	SOP-8	47opd	OP4	8d	Nsc
A8819EM	hk	AME8819AEHAADJZ	LVR-IC	LDO, Adjustable 0.98..4.5V, 600mA	SOP-8	47	-	8n	Ame
A8827FB	-	AME8827-AHA330	LVR-IC	LDO, 3.3V±1.5%, 1A, +CE	SOP-8	47	-	8n	Ame
A8827GB	-	AME8827-BZA330	LVR-IC	LDO, 3.3V±1.5%, 1A, +CE	SOP-8	47	-	8n	Ame
a9	-	74AUP1G98GW	CMOS-Log	Configurable multiple function gate	SOT-363	33	Log82	7b	Nxp
A9	-	NLAS325US	Lin-IC	Dual SPST analog switch, 20Ω(5V)	US8	47	-	8b	Ons
A9	-	R1160D091A	LVR-IC	LDO, 0.9V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
A9	-	TK65919M	Lin-IC	Fluorescent lamp driver, 32mA, 400Hz	SOP-6	33zi	-	7b	Tok
A9-	-	RT9167B-26PF	LVR-IC	LDO, 2.6V±2%, 600mA, +CE	MSOP-8	55	VR7	8d	Rct
A96	-	ASMCC0096	Si-npn+Z-di	60V, 200mA, 200mW, 300MHz, Z-Di: 5,6V±5%, 200mW	SOT-363	33tz	-	7l	Di
A9G	-	CP2290GMM	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.25W(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Cpm
aA	-	74AUP2G34GW	CMOS-Log	Dual non-inverter buffers	SOT-363	33	Log23	7b	Nxp
AA	-	RP500N211A	DC-DC-IC	PWM/VFM st-dwn, 2.1V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
AAA	-	TPA301DGN	Lin-IC	AF PA, BTL, 2.5..5.5V, 350mW(5V/8Ω), shutdown	SSOP-8	47	AFP11	8d	Ti
AAAA	-	MAX9718AEUB	Lin-IC	AF PA, BTL, 2.7..5.5V 1.4W(5V/4Ω), select shutdown	SOP-10	60	AFP19	8d	Max
AAAB	-	MAX9718BEUB	Lin-IC	AF PA, BTL, 2.7..5.5V 1.4W(5V/4Ω), select shutdown	SOP-10	60	AFP20	8d	Max
AAAC	-	MAX9718CEUB	Lin-IC	AF PA, BTL, 2.7..5.5V 1.4W(5V/4Ω), select shutdown	SOP-10	60	AFP20	8d	Max
AAAD	-	MAX9718DEUB	Lin-IC	AF PA, BTL, 2.7..5.5V 1.4W(5V/4Ω), select shutdown	SOP-10	60	AFP20	8d	Max
AAAP	-	MAX9716EUA	Lin-IC	AF PA, BTL, 2.7..5.5V 1.4W(5V/4Ω), shutdown	SOP-8	47	AFP11	8d	Max



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AAAQ	-	MAX9717AEUA	Lin-IC	AF PA, BTL, 2.7..5.5V 1.4W(5V/4Ω), shutdown	SOP-8	47	AFP23	8d	Max
AAAR	-	MAX9717BEUA	Lin-IC	AF PA, BTL, 2.7..5.5V 1.4W(5V/4Ω), shutdown	SOP-8	47	AFP36	8d	Max
AAAT	-	MAX9717DEUA	Lin-IC	AF PA, BTL, 2.7..5.5V 1.4W(5V/4Ω), shutdown	SOP-8	47	AFP36	8d	Max
AAB	-	TPA311DGN	Lin-IC	AF PA, BTL, 2.5..5.5V, 250mW(5V/8Ω), shutdown	SSOP-8	47	AFP23	8d	Ti
AAC	-	TPA102DGN	Lin-IC	AF PA, 2.5..5.5V, 2x150mW(5V/8Ω)	SSOP-8	47	AFP17	8d	Ti
AAD	-	TPA112DGN	Lin-IC	AF PA, 2.5..5.5V, 2x100mW(5V/8Ω)	SSOP-8	47	AFP6	8d	Ti
AAE	-	TPA122DGN	Lin-IC	AF PA, 2.5..5.5V, 2x100mW(5V/8Ω), shutdown	SSOP-8	47	AFP16	8d	Ti
AAIK	-	MAX4337EKA-T	Lin-IC	AF PA, 2.7..5.5V, 2x40mW(3V/32Ω)	SOP-8	47	AFP6	8d	Max
AAIO	-	MAX4366EKA-T	Lin-IC	AF PA, BTL, 2.3..5.5V, 330mW(5V/32Ω), shutdown	SOP-8	47	AFP11	8d	Max
AAIP	-	MAX4367EKA-T	Lin-IC	AF PA, BTL, 2.3..5.5V, 330mW(5V/32Ω), shutdown	SOP-8	47	AFP27	8d	Max
AAIQ	-	MAX4368EKA-T	Lin-IC	AF PA, BTL, 2.3..5.5V, 330mW(5V/32Ω), shutdown	SOP-8	47	AFP27	8d	Max
AAKK	-	MAX6505UTN035	Tdet-IC	-35°C, ODO	SOT-23-6	33hg	-	7b	Max
AAKL	-	MAX6505UTN030	Tdet-IC	-30°C, ODO	SOT-23-6	33hg	-	7b	Max
AAKM	-	MAX6505UTN025	Tdet-IC	-25°C, ODO	SOT-23-6	33hg	-	7b	Max
AAKN	-	MAX6505UTN020	Tdet-IC	-20°C, ODO	SOT-23-6	33hg	-	7b	Max
AAKO	-	MAX6505UTN015	Tdet-IC	-15°C, ODO	SOT-23-6	33hg	-	7b	Max
AAKP	-	MAX6505UTN010	Tdet-IC	-10°C, ODO	SOT-23-6	33hg	-	7b	Max
AAKQ	-	MAX6505UTN005	Tdet-IC	-5°C, ODO	SOT-23-6	33hg	-	7b	Max
AAKR	-	MAX6505UTP000	Tdet-IC	0°C, ODO	SOT-23-6	33hg	-	7b	Max
AAKS	-	MAX6505UTP005	Tdet-IC	+5°C, ODO	SOT-23-6	33hg	-	7b	Max
AAKT	-	MAX6505UTP010	Tdet-IC	+10°C, ODO	SOT-23-6	33hg	-	7b	Max
AAKU	-	MAX6505UTP015	Tdet-IC	+15°C, ODO	SOT-23-6	33hg	-	7b	Max
AAKV	-	MAX6505UTP020	Tdet-IC	+20°C, ODO	SOT-23-6	33hg	-	7b	Max
AAKW	-	MAX6505UTP025	Tdet-IC	+25°C, ODO	SOT-23-6	33hg	-	7b	Max
AAKX	-	MAX6505UTP030	Tdet-IC	+30°C, ODO	SOT-23-6	33hg	-	7b	Max
AAKY	-	MAX6505UTP035	Tdet-IC	+35°C, ODO	SOT-23-6	33hg	-	7b	Max
AAKZ	-	MAX6505UTP040	Tdet-IC	+40°C, ODO	SOT-23-6	33hg	-	7b	Max
AALA	-	MAX6505UTP045	Tdet-IC	+45°C, ODO	SOT-23-6	33hg	-	7b	Max
AALB	-	MAX6505UTP050	Tdet-IC	+50°C, ODO	SOT-23-6	33hg	-	7b	Max
AALC	-	MAX6505UTP055	Tdet-IC	+55°C, ODO	SOT-23-6	33hg	-	7b	Max
AALD	-	MAX6505UTP060	Tdet-IC	+60°C, ODO	SOT-23-6	33hg	-	7b	Max
AALE	-	MAX6505UTP065	Tdet-IC	+65°C, ODO	SOT-23-6	33hg	-	7b	Max
AALF	-	MAX6505UTP070	Tdet-IC	+70°C, ODO	SOT-23-6	33hg	-	7b	Max
AALG	-	MAX6505UTP075	Tdet-IC	+75°C, ODO	SOT-23-6	33hg	-	7b	Max
AALH	-	MAX6505UTP080	Tdet-IC	+80°C, ODO	SOT-23-6	33hg	-	7b	Max
AALI	-	MAX6505UTP085	Tdet-IC	+85°C, ODO	SOT-23-6	33hg	-	7b	Max
AALJ	-	MAX6505UTP090	Tdet-IC	+90°C, ODO	SOT-23-6	33hg	-	7b	Max
AALK	-	MAX6505UTP095	Tdet-IC	+95°C, ODO	SOT-23-6	33hg	-	7b	Max
AALL	-	MAX6505UTP100	Tdet-IC	+100°C, ODO	SOT-23-6	33hg	-	7b	Max
AALM	-	MAX6505UTP105	Tdet-IC	+105°C, ODO	SOT-23-6	33hg	-	7b	Max
AALN	-	MAX6505UTP110	Tdet-IC	+110°C, ODO	SOT-23-6	33hg	-	7b	Max
AALO	-	MAX6505UTP115	Tdet-IC	+115°C, ODO	SOT-23-6	33hg	-	7b	Max
AALP	-	MAX6505UTP120	Tdet-IC	+120°C, ODO	SOT-23-6	33hg	-	7b	Max
AALQ	-	MAX6505UTP125	Tdet-IC	+125°C, ODO	SOT-23-6	33hg	-	7b	Max
AALR	-	MAX6506UTN035	Tdet-IC	-35°C, PPO	SOT-23-6	33hg	-	7b	Max
AALS	-	MAX6506UTN030	Tdet-IC	-30°C, PPO	SOT-23-6	33hg	-	7b	Max
AALT	-	MAX6506UTN025	Tdet-IC	-25°C, PPO	SOT-23-6	33hg	-	7b	Max
AALU	-	MAX6506UTN020	Tdet-IC	-20°C, PPO	SOT-23-6	33hg	-	7b	Max
AALV	-	MAX6506UTN015	Tdet-IC	-15°C, PPO	SOT-23-6	33hg	-	7b	Max
AALW	-	MAX6506UTN010	Tdet-IC	-10°C, PPO	SOT-23-6	33hg	-	7b	Max
AALX	-	MAX6506UTN005	Tdet-IC	-5°C, PPO	SOT-23-6	33hg	-	7b	Max
AALY	-	MAX6506UTP000	Tdet-IC	0°C, PPO	SOT-23-6	33hg	-	7b	Max
AALZ	-	MAX6506UTP005	Tdet-IC	+5°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMA	-	MAX6506UTP010	Tdet-IC	+10°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMB	-	MAX6506UTP015	Tdet-IC	+15°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMC	-	MAX6506UTP020	Tdet-IC	+20°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMD	-	MAX6506UTP025	Tdet-IC	+25°C, PPO	SOT-23-6	33hg	-	7b	Max
AAME	-	MAX6506UTP030	Tdet-IC	+30°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMF	-	MAX6506UTP035	Tdet-IC	+35°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMG	-	MAX6506UTP040	Tdet-IC	+40°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMH	-	MAX6506UTP045	Tdet-IC	+45°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMI	-	MAX6506UTP050	Tdet-IC	+50°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMJ	-	MAX6506UTP055	Tdet-IC	+55°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMK	-	MAX6506UTP060	Tdet-IC	+60°C, PPO	SOT-23-6	33hg	-	7b	Max
AAML	-	MAX6506UTP065	Tdet-IC	+65°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMM	-	MAX6506UTP070	Tdet-IC	+70°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMN	-	MAX6506UTP075	Tdet-IC	+75°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMO	-	MAX6506UTP080	Tdet-IC	+80°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMP	-	MAX6506UTP085	Tdet-IC	+85°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMQ	-	MAX6506UTP090	Tdet-IC	+90°C, PPO	SOT-23-6	33hg	-	7b	Max

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AAMR	-	MAX6506UTP095	Tdet-IC	+95°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMS	-	MAX6506UTP100	Tdet-IC	+100°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMT	-	MAX6506UTP105	Tdet-IC	+105°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMU	-	MAX6506UTP110	Tdet-IC	+110°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMV	-	MAX6506UTP115	Tdet-IC	+115°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMW	-	MAX6506UTP120	Tdet-IC	+120°C, PPO	SOT-23-6	33hg	-	7b	Max
AAMX	-	MAX6506UTP125	Tdet-IC	+125°C, PPO	SOT-23-6	33hg	-	7b	Max
AAPI	-	TPA6205A1DGN	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	SOP-8	47	-	8d	Ti
AAs	-	BCP51M	Si-pnp	AF-Dr/Out, 45V, 1A, 1.7W, B=40..250, 100MHz	SCT-595	71t7	-	7l	Inf
AAS	-	MAX9717CEUA	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), shutdown	SOP-8	47	AFP36	8d	Max
AAW	-	MAX4336EXT-T	Lin-IC	AF PA, 2.7..5.5V, 40mW(3V/32Ω), shutdown	SOP-6	33	AFP35	7b	Max
AAX	-	MAX4335EXT-T	Lin-IC	AF PA, 2.7..5.5V, 40mW(3V/32Ω), shutdown	SOP-6	33	AFP34	7b	Max
aB	-	74AUP1G38GW	CMOS-Log	2-input NAND gate (ODO)	SOT-363	33	Log17	7b	Nxp
AB	-	RP500N212A	DC-DC-IC	PWM step-down, 2.1V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
ABA	-	TPA701DGN	Lin-IC	AF PA, BTL, 2.5..5.5V, 700mW(5V/8Ω), shutdown	SSOP-8	47	AFP11	8d	Ti
ABB	-	TPA711DGN	Lin-IC	AF PA, BTL, 2.5..5.5V, 700mW(5V/8Ω), shutdown	SSOP-8	47	AFP23	8d	Ti
ABC	-	TPA721DGN	Lin-IC	AF PA, BTL, 2.5..5.5V, 700mW(5V/8Ω), shutdown	SSOP-8	47	AFP11	8d	Ti
ABEL	-	MAX6449UT16L	Vdet-IC	1.6V±1.5%, ±MR, -Reset PPO	SOT-23-6	33yg	-	7b	Max
ABEM	-	MAX6450UT16L	Vdet-IC	1.6V±1.5%, ±MR, -Reset ODO	SOT-23-6	33yg	-	7b	Max
ABEN	-	MAX6451UT23L	Vdet-IC	2.3V±1.5%, ±MR, -Reset PPO	SOT-23-6	33yg	-	7b	Max
ABFF	-	MAX6469UT28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, Set, +CE	SOT-23-6	33	-	7b	Max
ABFG	-	MAX6470UT33BD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset ODO, Set, +CE	SOT-23-6	33	-	7b	Max
ABFH	-	MAX6471UT30BD4	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, Set, -MR	SOT-23-6	33	-	7b	Max
ABFI	-	MAX6472UT18BD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset ODO, Set, -MR	SOT-23-6	33	-	7b	Max
ABFJ	-	MAX6473UT25AD1	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset PPO, -MR, +CE	SOT-23-6	33	-	7b	Max
ABFK	-	MAX6474UT15BD2	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset ODO, -MR, +CE	SOT-23-6	33	-	7b	Max
ABFL	-	MAX6475UT33AD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset PPO, FB, +CE	SOT-23-6	33	-	7b	Max
ABFM	-	MAX6476UT15AD1	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset ODO, FB, +CE	SOT-23-6	33	-	7b	Max
ABG	-	BL6211MM	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	SOP-8	47	AFP22	8d	Shb
ABG	-	CP2296GMM	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	SOP-8	47	AFP22	8d	Cpm
ABKS	-	MAX6469UT15BD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset PPO, Set, +CE	SOT-23-6	33	-	7b	Max
ABKT	-	MAX6469UT18AD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset PPO, Set, +CE	SOT-23-6	33	-	7b	Max
ABKU	-	MAX6469UT25BD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset PPO, Set, +CE	SOT-23-6	33	-	7b	Max
ABKV	-	MAX6469UT30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, Set, +CE	SOT-23-6	33	-	7b	Max
ABKW	-	MAX6469UT33AD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset PPO, Set, +CE	SOT-23-6	33	-	7b	Max
ABKX	-	MAX6470UT15BD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset ODO, Set, +CE	SOT-23-6	33	-	7b	Max
ABKY	-	MAX6470UT18AD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset ODO, Set, +CE	SOT-23-6	33	-	7b	Max
ABKZ	-	MAX6470UT25BD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset ODO, Set, +CE	SOT-23-6	33	-	7b	Max
ABLA	-	MAX6470UT28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset ODO, Set, +CE	SOT-23-6	33	-	7b	Max
ABLB	-	MAX6470UT30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset ODO, Set, +CE	SOT-23-6	33	-	7b	Max
ABLC	-	MAX6470UT33AD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset ODO, Set, +CE	SOT-23-6	33	-	7b	Max
ABLD	-	MAX6471UT15AD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset PPO, Set, -MR	SOT-23-6	33	-	7b	Max
ABLE	-	MAX6471UT18BD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset PPO, Set, -MR	SOT-23-6	33	-	7b	Max
ABLF	-	MAX6471UT25AD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset PPO, Set, -MR	SOT-23-6	33	-	7b	Max
ABLG	-	MAX6471UT28BD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, Set, -MR	SOT-23-6	33	-	7b	Max
ABLH	-	MAX6471UT30AD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, Set, -MR	SOT-23-6	33	-	7b	Max
ABLI	-	MAX6471UT33BD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset PPO, Set, -MR	SOT-23-6	33	-	7b	Max
ABLJ	-	MAX6472UT15AD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset ODO, Set, -MR	SOT-23-6	33	-	7b	Max
ABLK	-	MAX6472UT25AD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset ODO, Set, -MR	SOT-23-6	33	-	7b	Max
ABLL	-	MAX6472UT28BD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset ODO, Set, -MR	SOT-23-6	33	-	7b	Max
ABLM	-	MAX6472UT30AD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset ODO, Set, -MR	SOT-23-6	33	-	7b	Max
ABLN	-	MAX6472UT33BD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset ODO, Set, -MR	SOT-23-6	33	-	7b	Max
ABLO	-	MAX6473UT15AD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset PPO, -MR, +CE	SOT-23-6	33	-	7b	Max
ABLP	-	MAX6473UT18BD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset PPO, -MR, +CE	SOT-23-6	33	-	7b	Max
ABLQ	-	MAX6473UT25AD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset PPO, -MR, +CE	SOT-23-6	33	-	7b	Max
ABLR	-	MAX6473UT28BD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, -MR, +CE	SOT-23-6	33	-	7b	Max
ABLS	-	MAX6473UT30AD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, -MR, +CE	SOT-23-6	33	-	7b	Max
ABLT	-	MAX6473UT33BD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset PPO, -MR, +CE	SOT-23-6	33	-	7b	Max
ABLU	-	MAX6474UT15AD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset ODO, -MR, +CE	SOT-23-6	33	-	7b	Max
ABLV	-	MAX6474UT18BD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset ODO, -MR, +CE	SOT-23-6	33	-	7b	Max
ABLW	-	MAX6474UT25AD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset ODO, -MR, +CE	SOT-23-6	33	-	7b	Max
ABLX	-	MAX6474UT28BD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset ODO, -MR, +CE	SOT-23-6	33	-	7b	Max
ABLY	-	MAX6474UT30AD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset ODO, -MR, +CE	SOT-23-6	33	-	7b	Max
ABLZ	-	MAX6474UT33BD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset ODO, -MR, +CE	SOT-23-6	33	-	7b	Max
ABMA	-	MAX6475UT15BD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset PPO, FB, +CE	SOT-23-6	33	-	7b	Max
ABMB	-	MAX6475UT18AD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset PPO, FB, +CE	SOT-23-6	33	-	7b	Max
ABMC	-	MAX6475UT25BD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset PPO, FB, +CE	SOT-23-6	33	-	7b	Max
ABMD	-	MAX6475UT28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, FB, +CE	SOT-23-6	33	-	7b	Max
ABME	-	MAX6475UT30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, FB, +CE	SOT-23-6	33	-	7b	Max
ABMF	-	MAX6476UT15BD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset ODO, FB, +CE	SOT-23-6	33	-	7b	Max





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABMG	-	MAX6476UT18AD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset ODO, FB, +CE	SOT-23-6	33	-	7b	Max
ABMH	-	MAX6476UT25BD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset ODO, FB, +CE	SOT-23-6	33	-	7b	Max
ABMI	-	MAX6476UT28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset ODO, FB, +CE	SOT-23-6	33	-	7b	Max
ABMJ	-	MAX6476UT30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset ODO, FB, +CE	SOT-23-6	33	-	7b	Max
ABMK	-	MAX6476UT33AD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset ODO, FB, +CE	SOT-23-6	33	-	7b	Max
ABMZ	-	MAX6469UT285AD3	LVR/Vdet-IC	LDO, 2.85V±1.3%, 300mA, -Reset PPO, Set, +CE	SOT-23-6	33	-	7b	Max
ABNA	-	MAX6469UT285BD3	LVR/Vdet-IC	LDO, 2.85V±1.3%, 300mA, -Reset PPO, Set, +CE	SOT-23-6	33	-	7b	Max
ABNB	-	MAX6470UT285AD3	LVR/Vdet-IC	LDO, 2.85V±1.3%, 300mA, -Reset ODO, Set, +CE	SOT-23-6	33	-	7b	Max
ABNC	-	MAX6470UT285BD3	LVR/Vdet-IC	LDO, 2.85V±1.3%, 300mA, -Reset ODO, Set, +CE	SOT-23-6	33	-	7b	Max
ABNP	-	MAX6449UT23L	Vdet-IC	2.3V±1.5%, ±MR, -Reset PPO	SOT-23-6	33yg	-	7b	Max
ABNQ	-	MAX6449UT26L	Vdet-IC	2.6V±1.5%, ±MR, -Reset PPO	SOT-23-6	33yg	-	7b	Max
ABNR	-	MAX6449UT29L	Vdet-IC	2.9V±1.5%, ±MR, -Reset PPO	SOT-23-6	33yg	-	7b	Max
ABNS	-	MAX6449UT46L	Vdet-IC	4.6V±1.5%, ±MR, -Reset PPO	SOT-23-6	33yg	-	7b	Max
ABNT	-	MAX6451UT16L	Vdet-IC	1.6V±1.5%, ±MR, -Reset PPO	SOT-23-6	33yg	-	7b	Max
ABNU	-	MAX6451UT26L	Vdet-IC	2.6V±1.5%, ±MR, -Reset PPO	SOT-23-6	33yg	-	7b	Max
ABNV	-	MAX6451UT29L	Vdet-IC	2.9V±1.5%, ±MR, -Reset PPO	SOT-23-6	33yg	-	7b	Max
ABNW	-	MAX6451UT46L	Vdet-IC	4.6V±1.5%, ±MR, -Reset PPO	SOT-23-6	33yg	-	7b	Max
ABNX	-	MAX6450UT23L	Vdet-IC	2.3V±1.5%, ±MR, -Reset ODO	SOT-23-6	33yg	-	7b	Max
ABNY	-	MAX6450UT26L	Vdet-IC	2.6V±1.5%, ±MR, -Reset ODO	SOT-23-6	33yg	-	7b	Max
ABNZ	-	MAX6450UT29L	Vdet-IC	2.9V±1.5%, ±MR, -Reset ODO	SOT-23-6	33yg	-	7b	Max
ABOA	-	MAX6450UT46L	Vdet-IC	4.6V±1.5%, ±MR, -Reset ODO	SOT-23-6	33yg	-	7b	Max
ABOB	-	MAX6452UT16L	Vdet-IC	1.6V±1.5%, ±MR, -Reset ODO	SOT-23-6	33yg	-	7b	Max
ABOC	-	MAX6452UT23L	Vdet-IC	2.3V±1.5%, ±MR, -Reset ODO	SOT-23-6	33yg	-	7b	Max
ABOD	-	MAX6452UT26L	Vdet-IC	2.6V±1.5%, ±MR, -Reset ODO	SOT-23-6	33yg	-	7b	Max
ABOE	-	MAX6452UT29L	Vdet-IC	2.9V±1.5%, ±MR, -Reset ODO	SOT-23-6	33yg	-	7b	Max
ABOF	-	MAX6452UT46L	Vdet-IC	4.6V±1.5%, ±MR, -Reset ODO	SOT-23-6	33yg	-	7b	Max
ABQV	-	MAX6469UT28AD1	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, Set, +CE	SOT-23-6	33	-	7b	Max
ABQX	-	MAX6469UT28BD1	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, Set, +CE	SOT-23-6	33	-	7b	Max
ABQY	-	MAX6469UT28BD2	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, Set, +CE	SOT-23-6	33	-	7b	Max
ABRB	-	MAX6757UTTD3	Vdet-IC	3.3V±1.5%, -MR, -UV PPO, -OV ODO, 200ms	SOT-23-6	33	-	7b	Max
ABRC	-	MAX6757UTLD3	Vdet-IC	5.0V±1.5%, -MR, -UV PPO, -OV ODO, 200ms	SOT-23-6	33	-	7b	Max
ABRE	-	MAX6757UTZD0	Vdet-IC	2.5V±1.5%, -MR, -UV PPO, -OV ODO, 20ms	SOT-23-6	33	-	7b	Max
ABRF	-	MAX6757UTWD3	Vdet-IC	1.8V±1.5%, -MR, -UV PPO, -OV ODO, 200ms	SOT-23-6	33	-	7b	Max
ABRG	-	MAX6758UTLD3	Vdet-IC	5.0V±1.5%, -MR, +UV PPO, -OV ODO, 200ms	SOT-23-6	33	-	7b	Max
ABRH	-	MAX6758UTTD3	Vdet-IC	3.3V±1.5%, -MR, +UV PPO, -OV ODO, 200ms	SOT-23-6	33	-	7b	Max
ABRJ	-	MAX6758UTZD0	Vdet-IC	2.5V±1.5%, -MR, +UV PPO, -OV ODO, 20ms	SOT-23-6	33	-	7b	Max
ABRK	-	MAX6758UTWD3	Vdet-IC	1.8V±1.5%, -MR, +UV PPO, -OV ODO, 200ms	SOT-23-6	33	-	7b	Max
ABRL	-	MAX6759UTLD0	Vdet-IC	5.0V±1.5%, -MR, -UV ODO, -OV ODO, 20ms	SOT-23-6	33	-	7b	Max
ABRM	-	MAX6759UTTD0	Vdet-IC	3.3V±1.5%, -MR, -UV ODO, -OV ODO, 20ms	SOT-23-6	33	-	7b	Max
ABRO	-	MAX6759UTZD3	Vdet-IC	2.5V±1.5%, -MR, -UV ODO, -OV ODO, 200ms	SOT-23-6	33	-	7b	Max
ABRP	-	MAX6759UTWD0	Vdet-IC	1.8V±1.5%, -MR, -UV ODO, -OV ODO, 20ms	SOT-23-6	33	-	7b	Max
ABRQ	-	MAX6763UT	Vdet-IC	ADJ, -UV PPO, -OV PPO	SOT-23-6	33	-	7b	Max
ABRR	-	MAX6764UT	Vdet-IC	ADJ, -UV ODO, -OV ODO	SOT-23-6	33	-	7b	Max
ABSE	-	MAX6469UT27AD3	LVR/Vdet-IC	LDO, 2.7V±1.3%, 300mA, -Reset PPO, Set, +CE	SOT-23-6	33	-	7b	Max
ABSO	-	MAX6757UTLD0	Vdet-IC	5.0V±1.5%, -MR, -UV PPO, -OV ODO, 20ms	SOT-23-6	33	-	7b	Max
ABST	-	MAX6757UTTD0	Vdet-IC	3.3V±1.5%, -MR, -UV PPO, -OV ODO, 20ms	SOT-23-6	33	-	7b	Max
ABSW	-	MAX6757UTZD3	Vdet-IC	2.5V±1.5%, -MR, -UV PPO, -OV ODO, 200ms	SOT-23-6	33	-	7b	Max
ABSX	-	MAX6757UTWD0	Vdet-IC	1.8V±1.5%, -MR, -UV PPO, -OV ODO, 20ms	SOT-23-6	33	-	7b	Max
ABSY	-	MAX6758UTLD0	Vdet-IC	5.0V±1.5%, -MR, +UV PPO, -OV ODO, 20ms	SOT-23-6	33	-	7b	Max
ABSZ	-	MAX6758UTTD0	Vdet-IC	3.3V±1.5%, -MR, +UV PPO, -OV ODO, 20ms	SOT-23-6	33	-	7b	Max
ABTB	-	MAX6758UTZD3	Vdet-IC	2.5V±1.5%, -MR, +UV PPO, -OV ODO, 200ms	SOT-23-6	33	-	7b	Max
ABTC	-	MAX6758UTWD0	Vdet-IC	1.8V±1.5%, -MR, +UV PPO, -OV ODO, 20ms	SOT-23-6	33	-	7b	Max
ABTD	-	MAX6759UTLD3	Vdet-IC	5.0V±1.5%, -MR, -UV ODO, -OV ODO, 200ms	SOT-23-6	33	-	7b	Max
ABTE	-	MAX6759UTTD3	Vdet-IC	3.3V±1.5%, -MR, -UV ODO, -OV ODO, 200ms	SOT-23-6	33	-	7b	Max
ABTG	-	MAX6759UTZD0	Vdet-IC	2.5V±1.5%, -MR, -UV ODO, -OV ODO, 20ms	SOT-23-6	33	-	7b	Max
ABTH	-	MAX6759UTWD3	Vdet-IC	1.8V±1.5%, -MR, -UV ODO, -OV ODO, 200ms	SOT-23-6	33	-	7b	Max
aC	-	74AUP1G57GW	CMOS-Log	Configurable multiple-function gate	SOT-363	33	Log36	7b	Nxp
AC	-	CP2297SP	Lin-IC	AF PA, BTL, 2.5..5.5V, 3.1W(5V/8Ω), shutdown	SOP-8	47	AFP22	8d	Cpm
AC	-	NLAS1053US	Lin-IC	2:1 Mux/Demux analog switches, 25Ω(5V)	US8	47	-	8b	Ons
AC	-	RP500N214A	DC-DC-IC	PWM step-down, 2.1V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
AC=	-	RT9193-30GF	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	MSOP-8	47vtc	VR7	8d	Rct
ACOR	-	MAX6469UT29AD4	LVR/Vdet-IC	LDO, 2.9V±1.3%, 300mA, -Reset PPO, Set, +CE	SOT-23-6	33	-	7b	Max
aD	-	74AUP2GU04GW	CMOS-Log	Dual inverters	SOT-363	33	Log24	7b	Nxp
AD	-	BAS70SV	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-563	35dw	-	7b	F
AD	-	RP500N222A	DC-DC-IC	PWM step-down, 2.2V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
AD2	-	BAS40ADWGP	Si-diode	Quad, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-363	33	D8	7b	Chm
AD2101	-	AZAD2101Q	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.6W(5V/4Ω), shutdown	MSOP-8L	55	AFP24	8d	Amz
AD2204	-	AZAD2204P	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x3W(5V/4Ω), DC volume, shutdown	SOP-16L	60	-	8d	Amz
AD3	-	BAS70ADWGP	Si-diode	Quad, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33	D8	7b	Chm
AE	-	RP500N224A	DC-DC-IC	PWM step-down, 2.2V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AEH	-	TPA0213DGQ	Lin-IC	AF PA, BTL, 2.5..5.5V, 2W(3V/4Ω), shutdown	SSOP-10	60	AFP42	8d	Ti
AEI	-	TPA0223DGQ	Lin-IC	AF PA, BTL, 2.5..5.5V, 2W(3V/4Ω), shutdown	SSOP-10	60	AFP42	8d	Ti
AEJ	-	TPA0233DGQ	Lin-IC	AF PA, BTL, 2.5..5.5V, 2W(3V/4Ω), shutdown	SOP-10	60	AFP43	8d	Ti
AEK	-	TPA0243DGQ	Lin-IC	AF PA, BTL, 2.5..5.5V, 2W(3V/4Ω), shutdown	SSOP-10	60	AFP43	8d	Ti
AEL	-	TPA0253DGQ	Lin-IC	AF PA, BTL, 2.5..5.5V, 1W(5V/8Ω), shutdown	SSOP-10	60	AFP43	8d	Ti
AEs	-	BCP52M	Si-pnp	AF-Dr/Out, 60V, 1A, 1.7W, B=40..250, 100MHz	SCT-595	71t7	-	7l	Inf
AF	-	RP500N232A	DC-DC-IC	PWM step-down, 2.3V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
aG	-	74AUP1G332GW	CMOS-Log	3-input OR gate	SOT-363	33	Log32	7b	Nxp
AG	-	CP2297MM	Lin-IC	AF PA, BTL, 2.5..5.5V, 3.1W(5V/8Ω), shutdown	SSOP-8	47	AFP22	8d	Cpm
AG	-	RP500N234A	DC-DC-IC	PWM step-down, 2.3V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
aH	-	74AUP1G386GW	CMOS-Log	3-input EXCLUSIVE-OR gate	SOT-363	33	Log33	7b	Nxp
AH	-	RP500N241A	DC-DC-IC	PWM/VFM st-dwn, 2.4V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
AHs	-	BCP53M	Si-pnp	AF-Dr/Out, 100V, 1A, 1.7W, B=40..250, 100MHz	SCT-595	71t7	-	7l	Inf
AIZ	-	TPA6110A2DGN	Lin-IC	AF PA, 2.5..5.5V, 2x150mW(5V/16Ω), shutdown	SSOP-8	47	AFP17	8d	Ti
AJ	-	CP2293MM	Lin-IC	AF PA, BTL, 2.5..5.5V, 3W(5V/8Ω), shutdown	SOP-8	47	AFP22	8d	Cpm
AJ	-	RP500N242A	DC-DC-IC	PWM step-down, 2.4V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
AJA	-	TPA6111A2DGN	Lin-IC	AF PA, 2.5..5.5V, 2x150mW(5V/16Ω), shutdown	SSOP-8	47	AFP16	8d	Ti
AJB	-	TPA321DGN	Lin-IC	AF PA, BTL, 2.2..5.5V, 350mW(5V/8Ω), shutdown	SSOP-8	47	AFP11	8d	Ti
AJC	-	TPA731DGN	Lin-IC	AF PA, BTL, 2.5..5.5V, 700mW(5V/8Ω), shutdown	SSOP-8	47	AFP11	8d	Ti
AJD	-	TPA741DGN	Lin-IC	AF PA, BTL, 2.5..5.5V, 700mW(5V/8Ω), shutdown	SSOP-8	47	AFP11	8d	Ti
AJL	-	TPA6100A2DGK	Lin-IC	AF PA, 1.6..3.6V, 2x50mW(3V/16Ω), shutdown	SSOP-8	47	AFP17	8d	Ti
AJM	-	TPA6101A2DGK	Lin-IC	AF PA, 1.6..3.6V, 2x50mW(3V/16Ω), shutdown	SSOP-8	47	AFP17	8d	Ti
AJN	-	TPA6102A2DGK	Lin-IC	AF PA, 1.6..3.6V, 2x50mW(3V/16Ω), shutdown	SSOP-8	47	AFP17	8d	Ti
aK	-	74AUP1G58GW	CMOS-Log	Configurable multiple-function gate	SOT-363	33	Log37	7b	Nxp
AK	-	AAT3221IJS-2.5	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky
AK	-	HSMS-280K	Si-diode	Dual, Schottky, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-363	33dw	-	7b	Agi
AK	-	RP500N244A	DC-DC-IC	PWM step-down, 2.4V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
AL	-	AAT3221IJS-3.0	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky
AL	-	HSMS-280L	Si-diode	Triple, Schottky, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-363	33dd	-	7b	Agi
AL	-	RP500N261A	DC-DC-IC	PWM/VFM st-dwn, 2.6V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
AM	-	AAT3221IJS-3.3	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky
AM	-	RP500N262A	DC-DC-IC	PWM step-down, 2.6V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
AN	-	RP500N264A	DC-DC-IC	PWM step-down, 2.6V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
aP	-	74AUP1G157GW	CMOS-Log	2-input multiplexer	SOT-363	33	Log42	7b	Nxp
AP	-	HSMS-280P	Si-diode	Quad, Schottky, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-363	33bx	-	7b	Agi
AP	-	RP500N271A	DC-DC-IC	PWM/VFM st-dwn, 2.7V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
APA2308	-	EMA2308-50QA08GRT	Lin-IC	AF PA, 3..6V, 2x845mW(4V/32Ω)	TSSOP-8	60	AFP6	8d	Emp
APA2308	-	EMA2308-50SA08GRR	Lin-IC	AF PA, 3..6V, 2x845mW(4V/32Ω)	SOP-8	47	AFP6	8d	Emp
APD	-	TPA6112A2DGQ	Lin-IC	AF PA, 2.5..5.5V, 2x150mW(3V/16Ω), shutdown	SSOP-8	47	-	8d	Ti
AQ	-	AAT3221IJS-2.8	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky
AQ	-	RP500N272A	DC-DC-IC	PWM step-down, 2.7V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
AR	-	RP500N274A	DC-DC-IC	PWM step-down, 2.7V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
AS	-	RP500N291A	DC-DC-IC	PWM/VFM st-dwn, 2.9V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
ASH3	-	AS1910S-T	Vdet-IC	2.93V±1%, -Reset PPO	SOT-23-6	33	-	7d	Asm
ASH4	-	AS1910R-T	Vdet-IC	2.63V±1%, -Reset PPO	SOT-23-6	33	-	7d	Asm
ASH5	-	AS1910Z-T	Vdet-IC	2.32V±1%, -Reset PPO	SOT-23-6	33	-	7d	Asm
ASH6	-	AS1910V-T	Vdet-IC	1.58V±1%, -Reset PPO	SOT-23-6	33	-	7d	Asm
ASH7	-	AS1911S-T	Vdet-IC	2.93V±1%, +Reset PPO	SOT-23-6	33	-	7d	Asm
ASH8	-	AS1911R-T	Vdet-IC	2.63V±1%, +Reset PPO	SOT-23-6	33	-	7d	Asm
ASH9	-	AS1911Z-T	Vdet-IC	2.32V±1%, +Reset PPO	SOT-23-6	33	-	7d	Asm
ASIA	-	AS1911V-T	Vdet-IC	1.58V±1%, +Reset PPO	SOT-23-6	33	-	7d	Asm
ASIB	-	AS1912S-T	Vdet-IC	2.93V±1%, -Reset ODO	SOT-23-6	33	-	7d	Asm
ASIC	-	AS1912R-T	Vdet-IC	2.63V±1%, -Reset ODO	SOT-23-6	33	-	7d	Asm
ASID	-	AS1912Z-T	Vdet-IC	2.32V±1%, -Reset ODO	SOT-23-6	33	-	7d	Asm
ASIE	-	AS1912V-T	Vdet-IC	1.58V±1%, -Reset ODO	SOT-23-6	33	-	7d	Asm
ASIF	-	AS1913TZ-T	Vdet-IC	3.08V±1%, 2.313V±1%, -Reset PPO, -MR	SOT-23-6	33	-	7d	Asm
ASIG	-	AS1913SF-T	Vdet-IC	2.93V±1%,1.05V±1%, -Reset PPO, -MR	SOT-23-6	33	-	7d	Asm
ASIH	-	AS1913VD-T	Vdet-IC	1.58V±1%, 0.788V±1%, -Reset PPO, -MR	SOT-23-6	33	-	7d	Asm
ASII	-	AS1914TZ-T	Vdet-IC	3.08V±1%, 2.313V±1%, +Reset PPO	SOT-23-6	33	-	7d	Asm
ASIJ	-	AS1914SF-T	Vdet-IC	2.93V±1%,1.05V±1%, +Reset PPO	SOT-23-6	33	-	7d	Asm
ASIK	-	AS1914VD-T	Vdet-IC	1.58V±1%, 0.788V±1%, +Reset PPO	SOT-23-6	33	-	7d	Asm
ASIL	-	AS1915TZ-T	Vdet-IC	3.08V±1%, 2.313V±1%, -Reset ODO, -MR	SOT-23-6	33	-	7d	Asm
ASIM	-	AS1915SF-T	Vdet-IC	2.93V±1%, 1.05V±1%, -Reset ODO, -MR	SOT-23-6	33	-	7d	Asm
ASIN	-	AS1915VD-T	Vdet-IC	1.58V±1%, 0.788V±1%, -Reset ODO, -MR	SOT-23-6	33	-	7d	Asm
aT	-	74AUP1G175GW	CMOS-Log	Positive edge-triggered D-type flip-flop with reset	SOT-363	33	Log40	7b	Nxp
AT	-	RP500N292A	DC-DC-IC	PWM step-down, 2.9V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
ATC	-	TPA751DGN	Lin-IC	AF PA, BTL, 2.5..5.5V, 700mW(5V/8Ω), shutdown	SSOP-8	47	AFP11	8d	Ti
aU	-	74AUP1G158GW	CMOS-Log	2-input inverting multiplexer	SOT-363	33	Log48	7b	Nxp
AU	-	RP500N294A	DC-DC-IC	PWM step-down, 2.9V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
AU04	-	74AHC3GU04DP	CMOS-Log	Triple inverters	SOT505-2	47	Log56	8d	Nxp

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AU4	-	74AHC3GU04DC	CMOS-Log	Triple inverters	SOT765-1	55	Log56	8d	Nxp
AUN	-	OPA380AID	Op-IC	Transimpedance, 2.7..5.5V, 90MHz	MSOP-8	55opg	OP1	8d	Ti
aV	-	74AUP1G97GW	CMOS-Log	Configurable multiple-function gate	SOT-363	33	Log41	7b	Nxp
AV	-	RP500N312A	DC-DC-IC	PWM step-down, 3.1V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
aW	-	74AUP1G373GW	CMOS-Log	D-type transparent latch with 3-state output	SOT-363	33	Log35	7b	Nxp
AW	-	RP500N314A	DC-DC-IC	PWM step-down, 3.1V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
aX	-	74AUP1G374GW	CMOS-Log	Positive edge–triggered D-type flip-flop with 3-state output	SOT-363	33	Log28	7b	Nxp
AX	-	RP500N321A	DC-DC-IC	PWM/VFM st-dwn, 3.2V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
aY	-	74AUP1G0832GW	CMOS-Log	3-input AND-OR gate	SOT-363	33	Log45	7b	Nxp
AY	-	RP500N322A	DC-DC-IC	PWM step-down, 3.2V±1.5%, 600mA, +CE	SOT-23-6W	gi	DC20	7da	Ric
AYK	-	TPA6211A1DGN	Lin-IC	AF PA, BTL, 2.5..5.5V, 3.2W(5V/3Ω), shutdown	SSOP-8	47	AFP22	8d	Ti
AZ	-	RP500N324A	DC-DC-IC	PWM step-down, 3.2V±1.5%, 600mA, +CE, CL	SOT-23-6W	gi	DC20	7da	Ric
B0	-	R1160D101A	LVR-IC	LDO, 1.0V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
B0	-	R5421N111C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=1.1V	SOT-23-6	xj	VBM1	7da	Ric
B0	-	TK65920M	Lin-IC	Fluorescent lamp driver, 52mA, 175Hz	SOP-6	33zi	-	7b	Tok
B00A	-	R1161D282A5	LVR-IC	LDO, 2.85V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B00B	-	R1161D282B5	LVR-IC	LDO, 2.85V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B00D	-	R1161D282D5	LVR-IC	LDO, 2.85V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B01A	-	R1161D122A5	LVR-IC	LDO, 1.25V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B01A	-	R1172S181A5	LVR-IC	LDO, 1.85V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B01B	-	R1161D122B5	LVR-IC	LDO, 1.25V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B01B	-	R1172S181B5	LVR-IC	LDO, 1.85V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B01D	-	R1161D122D5	LVR-IC	LDO, 1.25V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B01D	-	R1172S181D5	LVR-IC	LDO, 1.85V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B02A	-	R1161D182A5	LVR-IC	LDO, 1.85V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B02A	-	R1172S281A5	LVR-IC	LDO, 2.85V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B02B	-	R1161D182B5	LVR-IC	LDO, 1.85V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B02B	-	R1172S281B5	LVR-IC	LDO, 2.85V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B02D	-	R1161D182D5	LVR-IC	LDO, 1.85V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B02D	-	R1172S281D5	LVR-IC	LDO, 2.85V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B08A	-	R1161D082A	LVR-IC	LDO, 0.8V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B08A	-	R1172S081A	LVR-IC	LDO, 0.8V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B08B	-	R1161D082B	LVR-IC	LDO, 0.8V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B08B	-	R1172S081B	LVR-IC	LDO, 0.8V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B08D	-	R1161D082D	LVR-IC	LDO, 0.8V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B08D	-	R1172S081D	LVR-IC	LDO, 0.8V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B09A	-	NCP585LSAN09T	LVR-IC	LDO, 0.9V±2%, 350mA, -CEL, AE(Mode)	HSON-6	34vrc	VR10	7d	Ons
B09A	-	R1161D092A	LVR-IC	LDO, 0.9V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B09A	-	R1172S091A	LVR-IC	LDO, 0.9V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B09A	-	R3112D091A	Vdet-IC	0.9V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B09B	-	NCP585HSAN09T	LVR-IC	LDO, 0.9V±2%, 350mA, +CEL, AE(Mode)	HSON-6	34vrc	VR10	7d	Ons
B09B	-	R1161D092B	LVR-IC	LDO, 0.9V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B09B	-	R1172S091B	LVR-IC	LDO, 0.9V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B09C	-	R3112D091C	Vdet-IC	0.9V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B09D	-	NCP585DSAN09T	LVR-IC	LDO, 0.9V±2%, 350mA, +CE, CL, AE(Mode)	HSON-6	34vrc	VR10	7d	Ons
B09D	-	R1161D092D	LVR-IC	LDO, 0.9V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B09D	-	R1172S091D	LVR-IC	LDO, 0.9V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B1	-	R1160D111A	LVR-IC	LDO, 1.1V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
B1	-	R5421N112C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=1.2V	SOT-23-6	xj	VBM1	7da	Ric
B1	-	TK65921M	Lin-IC	Fluorescent lamp driver, 52mA, 200Hz	SOP-6	33zi	-	7b	Tok
B10	-	IMB10A	Si-pnp-Digi	Dual, 50V, 100mA, R1/R2=2.2k/47k	SOT-23-6	33	TD4	7b	Rhm
B10A	-	R1161D102A	LVR-IC	LDO, 1.0V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B10A	-	R1172S101A	LVR-IC	LDO, 1.0V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B10A	-	R3112D101A	Vdet-IC	1V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B10B	-	R1161D102B	LVR-IC	LDO, 1.0V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B10B	-	R1172S101B	LVR-IC	LDO, 1.0V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B10C	-	R3112D101C	Vdet-IC	1V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B10D	-	R1161D102D	LVR-IC	LDO, 1.0V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B10D	-	R1172S101D	LVR-IC	LDO, 1.0V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B11	-	IMB11A	Si-pnp-Digi	Dual, 50V, 100mA, R1/R2=10k/10k	SOT-23-6	33	TD4	7b	Rhm
B11A	-	R1161D112A	LVR-IC	LDO, 1.1V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B11A	-	R1172S111A	LVR-IC	LDO, 1.1V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B11A	-	R3112D111A	Vdet-IC	1.1V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B11B	-	R1161D112B	LVR-IC	LDO, 1.1V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea7ea	Ric
B11B	-	R1172S111B	LVR-IC	LDO, 1.1V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B11C	-	R3112D111C	Vdet-IC	1.1V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B11D	-	R1161D112D	LVR-IC	LDO, 1.1V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B11D	-	R1172S111D	LVR-IC	LDO, 1.1V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B12A	-	NCP585LSAN12T	LVR-IC	LDO, 1.2V±2%, 350mA, -CEL, AE(Mode)	HSON-6	34vrc	VR10	7d	Ons
B12A	-	R1161D122A	LVR-IC	LDO, 1.2V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B12A	-	R1172S121A	LVR-IC	LDO, 1.2V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B12A	-	R3112D121A	Vdet-IC	1.2V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B12B	-	NCP585HSAN12T	LVR-IC	LDO, 1.2V±2%, 350mA, +CEL, AE(Mode)	HSON-6	34vrc	VR10	7d	Ons
B12B	-	R1161D122B	LVR-IC	LDO, 1.2V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B12B	-	R1172S121B	LVR-IC	LDO, 1.2V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B12C	-	R3112D121C	Vdet-IC	1.2V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B12D	-	NCP585DSAN12T	LVR-IC	LDO, 1.2V±2%, 350mA, +CE, CLL, AE(Mode)	HSON-6	34vrc	VR10	7d	Ons
B12D	-	R1161D122D	LVR-IC	LDO, 1.2V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B12D	-	R1172S121D	LVR-IC	LDO, 1.2V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B13A	-	R1161D132A	LVR-IC	LDO, 1.3V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B13A	-	R1172S131A	LVR-IC	LDO, 1.3V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B13A	-	R3112D131A	Vdet-IC	1.3V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B13B	-	R1161D132B	LVR-IC	LDO, 1.3V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B13B	-	R1172S131B	LVR-IC	LDO, 1.3V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B13C	-	R3112D131C	Vdet-IC	1.3V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B13D	-	R1161D132D	LVR-IC	LDO, 1.3V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B13D	-	R1172S131D	LVR-IC	LDO, 1.3V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B14A	-	R1161D142A	LVR-IC	LDO, 1.4V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B14A	-	R1172S141A	LVR-IC	LDO, 1.4V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B14A	-	R3112D141A	Vdet-IC	1.4V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B14B	-	R1161D142B	LVR-IC	LDO, 1.4V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B14B	-	R1172S141B	LVR-IC	LDO, 1.4V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B14C	-	R3112D141C	Vdet-IC	1.4V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B14D	-	R1161D142D	LVR-IC	LDO, 1.4V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B14D	-	R1172S141D	LVR-IC	LDO, 1.4V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B15A	-	R1161D152A	LVR-IC	LDO, 1.5V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B15A	-	R1172S151A	LVR-IC	LDO, 1.5V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B15A	-	R3112D151A	Vdet-IC	1.5V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B15B	-	R1161D152B	LVR-IC	LDO, 1.5V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B15B	-	R1172S151B	LVR-IC	LDO, 1.5V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B15C	-	R3112D151C	Vdet-IC	1.5V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B15D	-	R1161D152D	LVR-IC	LDO, 1.5V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B15D	-	R1172S151D	LVR-IC	LDO, 1.5V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B16	-	IMB16	Si-pnp-Digi	Dual, 50V, 500mA, R1/R2=4.7k/10k	SOT-23-6	33	TD4	7b	Rhm
B16A	-	R1161D162A	LVR-IC	LDO, 1.6V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B16A	-	R1172S161A	LVR-IC	LDO, 1.6V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B16A	-	R3112D161A	Vdet-IC	1.6V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B16B	-	R1161D162B	LVR-IC	LDO, 1.6V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B16B	-	R1172S161B	LVR-IC	LDO, 1.6V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B16C	-	R3112D161C	Vdet-IC	1.6V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B16D	-	R1161D162D	LVR-IC	LDO, 1.6V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B16D	-	R1172S161D	LVR-IC	LDO, 1.6V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B17A	-	R1161D172A	LVR-IC	LDO, 1.7V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B17A	-	R1172S171A	LVR-IC	LDO, 1.7V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B17A	-	R3112D171A	Vdet-IC	1.7V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B17B	-	R1161D172B	LVR-IC	LDO, 1.7V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B17B	-	R1172S171B	LVR-IC	LDO, 1.7V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B17C	-	R3112D171C	Vdet-IC	1.7V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B17D	-	R1161D172D	LVR-IC	LDO, 1.7V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B17D	-	R1172S171D	LVR-IC	LDO, 1.7V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B18A	-	NCP585LSAN18T	LVR-IC	LDO, 1.8V±2%, 350mA, -CEL, AE(Mode)	HSON-6	34vrc	VR10	7d	Ons
B18A	-	R1161D182A	LVR-IC	LDO, 1.8V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B18A	-	R1172S181A	LVR-IC	LDO, 1.8V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B18A	-	R3112D181A	Vdet-IC	1.8V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B18B	-	NCP585HSAN18T	LVR-IC	LDO, 1.8V±2%, 350mA, +CEL, AE(Mode)	HSON-6	34vrc	VR10	7d	Ons
B18B	-	R1161D182B	LVR-IC	LDO, 1.8V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B18B	-	R1172S181B	LVR-IC	LDO, 1.8V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B18C	-	R3112D181C	Vdet-IC	1.8V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B18D	-	NCP585DSAN18T	LVR-IC	LDO, 1.8V±2%, 350mA, +CE, CLL, AE(Mode)	HSON-6	34vrc	VR10	7d	Ons
B18D	-	R1161D182D	LVR-IC	LDO, 1.8V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B18D	-	R1172S181D	LVR-IC	LDO, 1.8V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B19A	-	R1161D192A	LVR-IC	LDO, 1.9V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B19A	-	R1172S191A	LVR-IC	LDO, 1.9V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B19A	-	R3112D191A	Vdet-IC	1.9V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B19B	-	R1161D192B	LVR-IC	LDO, 1.9V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B19B	-	R1172S191B	LVR-IC	LDO, 1.9V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B19C	-	R3112D191C	Vdet-IC	1.9V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B19D	-	R1161D192D	LVR-IC	LDO, 1.9V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B19D	-	R1172S191D	LVR-IC	LDO, 1.9V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B2	-	R1160D121A	LVR-IC	LDO, 1.2V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B2	-	R5421N126C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=2.6V	SOT-23-6	xj	VBM1	7da	Ric
B2	-	TK65922M	Lin-IC	Fluorescent lamp driver, 52mA, 225Hz	SOP-6	33zi	-	7b	Tok
B20A	-	R1161D202A	LVR-IC	LDO, 2.0V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B20A	-	R1172S201A	LVR-IC	LDO, 2.0V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B20A	-	R3112D201A	Vdet-IC	2V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B20B	-	R1161D202B	LVR-IC	LDO, 2.0V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B20B	-	R1172S201B	LVR-IC	LDO, 2.0V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B20C	-	R3112D201C	Vdet-IC	2V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B20D	-	R1161D202D	LVR-IC	LDO, 2.0V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B20D	-	R1172S201D	LVR-IC	LDO, 2.0V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B21A	-	R1161D212A	LVR-IC	LDO, 2.1V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B21A	-	R1172S211A	LVR-IC	LDO, 2.1V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B21A	-	R3112D211A	Vdet-IC	2.1V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B21B	-	R1161D212B	LVR-IC	LDO, 2.1V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B21B	-	R1172S211B	LVR-IC	LDO, 2.1V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B21C	-	R3112D211C	Vdet-IC	2.1V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B21D	-	R1161D212D	LVR-IC	LDO, 2.1V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B21D	-	R1172S211D	LVR-IC	LDO, 2.1V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B22A	-	R1161D222A	LVR-IC	LDO, 2.2V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B22A	-	R1172S221A	LVR-IC	LDO, 2.2V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B22A	-	R3112D221A	Vdet-IC	2.2V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B22B	-	R1161D222B	LVR-IC	LDO, 2.2V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B22B	-	R1172S221B	LVR-IC	LDO, 2.2V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B22C	-	R3112D221C	Vdet-IC	2.2V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B22D	-	R1161D222D	LVR-IC	LDO, 2.2V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B22D	-	R1172S221D	LVR-IC	LDO, 2.2V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B23A	-	R1161D232A	LVR-IC	LDO, 2.3V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B23A	-	R1172S231A	LVR-IC	LDO, 2.3V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B23A	-	R3112D231A	Vdet-IC	2.3V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B23B	-	R1161D232B	LVR-IC	LDO, 2.3V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B23B	-	R1172S231B	LVR-IC	LDO, 2.3V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B23C	-	R3112D231C	Vdet-IC	2.3V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B23D	-	R1161D232D	LVR-IC	LDO, 2.3V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B23D	-	R1172S231D	LVR-IC	LDO, 2.3V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B24A	-	R1161D242A	LVR-IC	LDO, 2.4V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B24A	-	R1172S241A	LVR-IC	LDO, 2.4V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B24A	-	R3112D241A	Vdet-IC	2.4V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B24B	-	R1161D242B	LVR-IC	LDO, 2.4V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B24B	-	R1172S241B	LVR-IC	LDO, 2.4V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B24C	-	R3112D241C	Vdet-IC	2.4V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B24D	-	R1161D242D	LVR-IC	LDO, 2.4V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B24D	-	R1172S241D	LVR-IC	LDO, 2.4V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B25A	-	R1161D252A	LVR-IC	LDO, 2.5V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B25A	-	R1172S251A	LVR-IC	LDO, 2.5V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B25A	-	R3112D251A	Vdet-IC	2.5V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B25B	-	R1161D252B	LVR-IC	LDO, 2.5V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B25B	-	R1172S251B	LVR-IC	LDO, 2.5V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B25C	-	R3112D251C	Vdet-IC	2.5V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B25D	-	R1161D252D	LVR-IC	LDO, 2.55V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B25D	-	R1172S251D	LVR-IC	LDO, 2.5V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B26A	-	R1161D262A	LVR-IC	LDO, 2.6V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B26A	-	R1172S261A	LVR-IC	LDO, 2.6V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B26A	-	R3112D261A	Vdet-IC	2.6V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B26B	-	R1161D262B	LVR-IC	LDO, 2.6V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B26B	-	R1172S261B	LVR-IC	LDO, 2.6V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B26C	-	R3112D261C	Vdet-IC	2.6V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B26D	-	R1161D262D	LVR-IC	LDO, 2.6V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B26D	-	R1172S261D	LVR-IC	LDO, 2.6V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B27A	-	R1161D272A	LVR-IC	LDO, 2.7V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B27A	-	R1172S271A	LVR-IC	LDO, 2.7V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B27A	-	R3112D271A	Vdet-IC	2.7V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B27B	-	R1161D272B	LVR-IC	LDO, 2.7V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B27B	-	R1172S271B	LVR-IC	LDO, 2.7V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B27C	-	R3112D271C	Vdet-IC	2.7V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B27D	-	R1161D272D	LVR-IC	LDO, 2.7V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B27D	-	R1172S271D	LVR-IC	LDO, 2.7V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B28A	-	R1161D282A	LVR-IC	LDO, 2.8V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B28A	-	R1172S281A	LVR-IC	LDO, 2.8V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B28A	-	R3112D281A	Vdet-IC	2.8V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B28B	-	R1161D282B	LVR-IC	LDO, 2.8V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B28B	-	R1172S281B	LVR-IC	LDO, 2.8V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B28C	-	R3112D281C	Vdet-IC	2.8V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B28D	-	R1161D282D	LVR-IC	LDO, 2.8V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B28D	-	R1172S281D	LVR-IC	LDO, 2.8V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B29A	-	R1161D292A	LVR-IC	LDO, 2.9V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B29A	-	R1172S291A	LVR-IC	LDO, 2.9V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B29A	-	R3112D291A	Vdet-IC	2.9V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B29B	-	R1161D292B	LVR-IC	LDO, 2.9V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B29B	-	R1172S291B	LVR-IC	LDO, 2.9V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B29C	-	R3112D291C	Vdet-IC	2.9V±2%, -Reset ODO	SON1612-6	ur	VD1	7e	Ric
B29D	-	R1161D292D	LVR-IC	LDO, 2.9V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B29D	-	R1172S291D	LVR-IC	LDO, 2.9V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B3	-	R1160D131A	LVR-IC	LDO, 1.3V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
B3	-	R5421N131C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=3.1V	SOT-23-6	xj	VBM1	7da	Ric
B3	-	TK65923M	Lin-IC	Fluorescent lamp driver, 52mA, 250Hz	SOP-6	33zi	-	7b	Tok
B30A	-	R1161D302A	LVR-IC	LDO, 3.0V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B30A	-	R1172S301A	LVR-IC	LDO, 3.0V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B30A	-	R3112D301A	Vdet-IC	3V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B30B	-	R1161D302B	LVR-IC	LDO, 3.0V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B30B	-	R1172S301B	LVR-IC	LDO, 3.0V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B30D	-	R1161D302D	LVR-IC	LDO, 3.0V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B30D	-	R1172S301D	LVR-IC	LDO, 3.0V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B31A	-	R1161D312A	LVR-IC	LDO, 3.1V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B31A	-	R1172S311A	LVR-IC	LDO, 3.1V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B31A	-	R3112D311A	Vdet-IC	3.1V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B31B	-	R1161D312B	LVR-IC	LDO, 3.1V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B31B	-	R1172S311B	LVR-IC	LDO, 3.1V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B31D	-	R1161D312D	LVR-IC	LDO, 3.1V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B31D	-	R1172S311D	LVR-IC	LDO, 3.1V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B32A	-	R1161D322A	LVR-IC	LDO, 3.2V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B32A	-	R1172S321A	LVR-IC	LDO, 3.2V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B32A	-	R3112D321A	Vdet-IC	3.2V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B32B	-	R1161D322B	LVR-IC	LDO, 3.2V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B32B	-	R1172S321B	LVR-IC	LDO, 3.2V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B32D	-	R1161D322D	LVR-IC	LDO, 3.2V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B32D	-	R1172S321D	LVR-IC	LDO, 3.2V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B33A	-	R1161D332A	LVR-IC	LDO, 3.3V±2%, 350mA, -CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B33A	-	R1172S331A	LVR-IC	LDO, 3.3V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B33A	-	R3112D331A	Vdet-IC	3.3V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B33B	-	R1161D332B	LVR-IC	LDO, 3.3V±2%, 350mA, +CE, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B33B	-	R1172S331B	LVR-IC	LDO, 3.3V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B33D	-	R1161D332D	LVR-IC	LDO, 3.3V±2%, 350mA, +CE, CL, AE(mode)	HSON-6	vrc	VR10	7ea	Ric
B33D	-	R1172S331D	LVR-IC	LDO, 3.3V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B34	-	MMBD3004BRM	Si-diode	Quad, Sw, 350V, 200mA, Vf<1.25V(200mA), <5pF	SOT-23-6	33	D9	7b	Ttr
B34A	-	R1172S341A	LVR-IC	LDO, 3.4V±2%, 1A, -CE, -CE	HSOP-6J	vrk	VR4	7h	Ric
B34A	-	R3112D341A	Vdet-IC	3.4V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B34B	-	R1172S341B	LVR-IC	LDO, 3.4V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B34D	-	R1172S341D	LVR-IC	LDO, 3.4V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B35A	-	R1172S351A	LVR-IC	LDO, 3.5V±2%, 1A, -CE	HSOP-6J	vrk	VR4	7h	Ric
B35A	-	R3112D351A	Vdet-IC	3.5V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B35B	-	R1172S351B	LVR-IC	LDO, 3.5V±2%, 1A, +CE	HSOP-6J	vrk	VR4	7h	Ric
B35D	-	R1172S351D	LVR-IC	LDO, 3.5V±2%, 1A, +CE, CL	HSOP-6J	vrk	VR4	7h	Ric
B36	-	OPA2336E	Op-IC	Dual, CMOS, single-supply, 2.3..5.5V, 115dB	MSOP-8	47opd	OP4	8d	Bb
B36A	-	R3112D361A	Vdet-IC	3.6V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B37A	-	OPA237EA	Op-IC	Dual, GP, Lo-power, ±1.35..±18V, Icc0=350µA, 1.5MHz	MSOP-8	47opd	OP4	8d	Bb
B37A	-	R3112D371A	Vdet-IC	3.7V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B38A	-	R3112D381A	Vdet-IC	3.8V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B39A	-	R3112D391A	Vdet-IC	3.9V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B4	-	R1160D141A	LVR-IC	LDO, 1.4V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
B4	-	R5421N133C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=3.3V	SOT-23-6	xj	VBM1	7da	Ric
B4	-	TK65924M	Lin-IC	Fluorescent lamp driver, 52mA, 275Hz	SOP-6	33zi	-	7b	Tok
B40A	-	R3112D401A	Vdet-IC	4V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B41A	-	R3112D411A	Vdet-IC	4.1V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B42A	-	R3112D421A	Vdet-IC	4.2V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B43A	-	R3112D431A	Vdet-IC	4.3V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B44A	-	R3112D441A	Vdet-IC	4.4V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B45A	-	R3112D451A	Vdet-IC	4.5V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B46A	-	R3112D461A	Vdet-IC	4.6V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B47A	-	R3112D471A	Vdet-IC	4.7V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B48A	-	R3112D481A	Vdet-IC	4.8V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B49A	-	R3112D491A	Vdet-IC	4.9V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B5	-	74AVC1T45GW	CMOS-Log	Dual supply translating transceiver with 3-state output	SOT-363	33	Log70	7b	Nxp
B5	-	R1160D151A	LVR-IC	LDO, 1.5V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
B5	-	R5421N114C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=1.4V	SOT-23-6	xj	VBM1	7da	Ric
B5	-	TK65925M	Lin-IC	Fluorescent lamp driver, 52mA, 300Hz	SOP-6	33zi	-	7b	Tok
B50A	-	R3112D501A	Vdet-IC	5V±2%, -Reset PPO	SON1612-6	ur	VD3	7e	Ric
B5A	-	R5421N165C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=6.5V	SOT-23-6	xj	VBM1	7da	Ric
B6	-	LM4919MM	Lin-IC	AF PA, 2.2..5.5V, 2x14mW(5V/16Ω), mute, shutdown	SSOP-10	60	AFP32	8d	Nsc
B6	-	R1160D161A	LVR-IC	LDO, 1.6V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
B6	-	R5421N115C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=1.5V	SOT-23-6	xj	VBM1	7da	Ric
B6	-	TK65926M	Lin-IC	Fluorescent lamp driver, 52mA, 325Hz	SOP-6	33zi	-	7b	Tok
B7	-	R1160D171A	LVR-IC	LDO, 1.7V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
B7	-	R5421N124C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=2.4V	SOT-23-6	xj	VBM1	7da	Ric
B7	-	TK65927M	Lin-IC	Fluorescent lamp driver, 52mA, 350Hz	SOP-6	33zi	-	7b	Tok
B8	-	R1160D181A	LVR-IC	LDO, 1.8V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
B8	-	R5421N125C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=2.5V	SOT-23-6	xj	VBM1	7da	Ric
B8	-	TK65928M	Lin-IC	Fluorescent lamp driver, 52mA, 375Hz	SOP-6	33zi	-	7b	Tok
B9	-	IMB9A	Si-pnp-Digi	Dual, 50V, 100mA, R1/R2=10k/47k	SOT-23-6	33	TD4	7b	Rhm
B9	-	R1160D191A	LVR-IC	LDO, 1.9V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
B9	-	R5421N140C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=4V	SOT-23-6	xj	VBM1	7da	Ric
B9	-	TK65929M	Lin-IC	Fluorescent lamp driver, 52mA, 400Hz	SOP-6	33zi	-	7b	Tok
BA	-	R5421N127C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=2.7V	SOT-23-6	xj	VBM1	7da	Ric
BAL	-	HA1102	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 1.4W(5V/8Ω), shutdown	MSOP-8	55	AFP24	8d	Cer
BAL	-	TPA2005D1DGN	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 1.4W(5V/8Ω), shutdown	SSOP-8	47	AFP24	8d	Ti
BAs	-	BCP54M	Si-npn	AF-Dr/Out, 45V, 1A, 1.7W, B=40..250, 100MHz	SCT-595	71t7	-	7l	Inf
BB	-	AAT3221IJS-1.8	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky
BB	-	BC846BPDW	Si-n/p	Dual, GP, 80V, 100mA, 250mW, B=200..450, >100MHz	SOT-363	33	T9	7b	Ons
BB	-	R5421N139F	BM-IC	Li-Ion, over-charge/discharge protection, Vd=3.9V	SOT-23-6	xj	VBM1	7da	Ric
BBG	-	A2190MM	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.28W(5V/8Ω), shutdown	MSOP-8	55	AFP12	8h	Aot
BBG	-	BL6212MM	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.28W(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Shb
BBG	-	BL6290M	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	SOP-8	47	AFP12	8d	Shb
BBG	-	BL6290MM	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Shb
BBG	-	LR6212M	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.28W(5V/8Ω), shutdown	MSOP-8	55	AFP12	8d	Lrc
BBX	-	OPA2380AID	Op-IC	Dual, Transimpedance, 2.7..5.5V, 90MHz	MSOP-8	55opd	OP4	8d	Ti
BC	-	R5421N128F	BM-IC	Li-Ion, over-charge/discharge protection, Vd=2.8V	SOT-23-6	xj	VBM1	7da	Ric
BD	-	R5421N132F	BM-IC	Li-Ion, over-charge/discharge protection, Vd=3.2V	SOT-23-6	xj	VBM1	7da	Ric
BD3	-	BAS70BDWGP	Si-diode	Quad, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33	D9	7l	Chm
BE	-	R5421N145C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=4.5V	SOT-23-6	xj	VBM1	7da	Ric
BEs	-	BCP55M	Si-npn	AF-Dr/Out, 60V, 1A, 1.7W, B=40..250, 100MHz	SCT-595	71t7	-	7l	Inf
BF	-	R5421N136C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=3.6V	SOT-23-6	xj	VBM1	7da	Ric
BG	-	NC7SP19L6	CMOS-Log	1-of-2 decoder/demultiplexer	MPAK-6	33	Log47	7b	F
BG	-	R5421N148C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=4.8V	SOT-23-6	xj	VBM1	7da	Ric
BH	-	R5421N154F	BM-IC	Li-Ion, over-charge/discharge protection, Vd=5.4V	SOT-23-6	xj	VBM1	7da	Ric
BHs	-	BCP56M	Si-npn	AF-Dr/Out, 45V, 1A, 1.7W, B=40..250, 100MHz	SCT-595	71t7	-	7l	Inf
BJ	-	R5421N161C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=6.1V	SOT-23-6	xj	VBM1	7da	Ric
BK	-	HSMS-281K	Si-diode	Dual, Schottky, RF, 20V, 1A, Vf<0.4V(1mA), <1.2pF, 15Ω(5mA)	SOT-363	33dw	-	7c	Agi
BK	-	R5421N149C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=4.9V	SOT-23-6	xj	VBM1	7da	Ric
BL	-	AAT3221IJS-2.0	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky
BL	-	HSMS-281L	Si-diode	Triple, Schottky, RF, 20V, 1A, Vf<0.4V(1mA), <1.2pF, 15Ω(5mA)	SOT-363	33dd	-	7c	Agi
BL	-	MBD54DW	Si-diode	Dual, Schottky, UHF/VHF-Det, 30V, 200mW, <1.5pF	SOT-363	33de	-	7b	Ons
BL	-	R5421N162F	BM-IC	Li-Ion, over-charge/discharge protection, Vd=6.2V	SOT-23-6	xj	VBM1	7da	Ric
BM	-	AAT3221IJS-3.5	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky
BM	-	R5421N163C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=6.3V	SOT-23-6	xj	VBM1	7da	Ric
BN	-	R5421N174C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=7.4V	SOT-23-6	xj	VBM1	7da	Ric
BP	-	R5421N175C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=7.5V	SOT-23-6	xj	VBM1	7da	Ric
BR	-	R5421N164C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=6.4V	SOT-23-6	xj	VBM1	7da	Ric
BT	-	R5421N142C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=4.2V	SOT-23-6	xj	VBM1	7da	Ric
BU	-	R5421N163F	BM-IC	Li-Ion, over-charge/discharge protection, Vd=6.3V	SOT-23-6	xj	VBM1	7da	Ric
BV	-	R5421N129C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=2.9V	SOT-23-6	xj	VBM1	7da	Ric
BVAAG	-	AIC1750-AAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAAP	-	AIC1750-AAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVABG	-	AIC1750-ABGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVABP	-	AIC1750-ABPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVACG	-	AIC1750-ACGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVACP	-	AIC1750-ACPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVADG	-	AIC1750-ADGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVADP	-	AIC1750-ADPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAEG	-	AIC1750-AEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAEP	-	AIC1750-AEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAFG	-	AIC1750-AFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVAFP	-	AIC1750-AFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAGG	-	AIC1750-AGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAGP	-	AIC1750-AGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAHG	-	AIC1750-AHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAHP	-	AIC1750-AHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAIG	-	AIC1750-AIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAIP	-	AIC1750-AIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAJG	-	AIC1750-AJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAJP	-	AIC1750-AJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAKG	-	AIC1750-AKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAKP	-	AIC1750-AKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVALG	-	AIC1750-ALGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVALP	-	AIC1750-ALPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAMG	-	AIC1750-AMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAMP	-	AIC1750-AMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVANG	-	AIC1750-ANGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVANP	-	AIC1750-ANPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAOG	-	AIC1750-AOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAOP	-	AIC1750-AOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAPG	-	AIC1750-APGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAPP	-	AIC1750-APPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAQG	-	AIC1750-AQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAQP	-	AIC1750-AQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVARG	-	AIC1750-ARGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVARP	-	AIC1750-ARPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVASG	-	AIC1750-ASGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVASP	-	AIC1750-ASPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVATG	-	AIC1750-ATGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVATP	-	AIC1750-ATPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAUG	-	AIC1750-AUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAUP	-	AIC1750-AUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAVG	-	AIC1750-AVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAVP	-	AIC1750-AVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAWG	-	AIC1750-AWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAWP	-	AIC1750-AWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAXG	-	AIC1750-AXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVAXP	-	AIC1750-AXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBAG	-	AIC1750-BAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBAP	-	AIC1750-BAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBBG	-	AIC1750-BBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBBP	-	AIC1750-BBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBCG	-	AIC1750-BCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBCP	-	AIC1750-BCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBDG	-	AIC1750-BDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBDP	-	AIC1750-BDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBEG	-	AIC1750-BEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBEP	-	AIC1750-BEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBFG	-	AIC1750-BFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBFP	-	AIC1750-BFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBGG	-	AIC1750-BGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBGP	-	AIC1750-BGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBHG	-	AIC1750-BHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBHP	-	AIC1750-BHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBIG	-	AIC1750-BIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBIP	-	AIC1750-BIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBJG	-	AIC1750-BJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBJP	-	AIC1750-BJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBKG	-	AIC1750-BKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBKP	-	AIC1750-BKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBLG	-	AIC1750-BLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBLP	-	AIC1750-BLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBMG	-	AIC1750-BMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBMP	-	AIC1750-BMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBNG	-	AIC1750-BNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBNP	-	AIC1750-BNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBOG	-	AIC1750-BOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBOP	-	AIC1750-BOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBPG	-	AIC1750-BPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBPP	-	AIC1750-BPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBQG	-	AIC1750-BQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVBQP	-	AIC1750-BQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBRG	-	AIC1750-BRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBRP	-	AIC1750-BRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBSG	-	AIC1750-BSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBSP	-	AIC1750-BSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBTG	-	AIC1750-BTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBTP	-	AIC1750-BTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBUG	-	AIC1750-BUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBUP	-	AIC1750-BUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBVG	-	AIC1750-BVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBVP	-	AIC1750-BVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBWG	-	AIC1750-BWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBWP	-	AIC1750-BWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBXG	-	AIC1750-BXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVBXP	-	AIC1750-BXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCAG	-	AIC1750-CAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCAP	-	AIC1750-CAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCBG	-	AIC1750-CBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCBP	-	AIC1750-CBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCCG	-	AIC1750-CCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCCP	-	AIC1750-CCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCDG	-	AIC1750-CDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCDP	-	AIC1750-CDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCEG	-	AIC1750-CEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCEP	-	AIC1750-CEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCFG	-	AIC1750-CFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCFP	-	AIC1750-CFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCGG	-	AIC1750-CGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCGP	-	AIC1750-CGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCHG	-	AIC1750-CHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCHP	-	AIC1750-CHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCIG	-	AIC1750-CIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCIP	-	AIC1750-CIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCJG	-	AIC1750-CJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCJP	-	AIC1750-CJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCKG	-	AIC1750-CKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCKP	-	AIC1750-CKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCLG	-	AIC1750-CLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCLP	-	AIC1750-CLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCMG	-	AIC1750-CMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCMP	-	AIC1750-CMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCNG	-	AIC1750-CNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCNP	-	AIC1750-CNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCOG	-	AIC1750-COGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCOP	-	AIC1750-COPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCPG	-	AIC1750-CPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCPP	-	AIC1750-CPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCQG	-	AIC1750-CQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCQP	-	AIC1750-CQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCRG	-	AIC1750-CRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCRP	-	AIC1750-CRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCSG	-	AIC1750-CSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCSP	-	AIC1750-CSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCTG	-	AIC1750-CYGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCTP	-	AIC1750-CYPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCUG	-	AIC1750-CUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCUP	-	AIC1750-CUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCVG	-	AIC1750-CVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCVP	-	AIC1750-CVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCWG	-	AIC1750-CWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCWP	-	AIC1750-CWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCXG	-	AIC1750-CXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVCXP	-	AIC1750-CXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDAG	-	AIC1750-DAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDAP	-	AIC1750-DAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDBG	-	AIC1750-DBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDBP	-	AIC1750-DBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDCG	-	AIC1750-DCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDCP	-	AIC1750-DCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDDG	-	AIC1750-DDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVDDP	-	AIC1750-DDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDEG	-	AIC1750-DEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDEP	-	AIC1750-DEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDFG	-	AIC1750-DFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDFP	-	AIC1750-DFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDGG	-	AIC1750-DGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDGP	-	AIC1750-DGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDHG	-	AIC1750-DHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDHP	-	AIC1750-DHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDIG	-	AIC1750-DIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDIP	-	AIC1750-DIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDJG	-	AIC1750-DJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDJP	-	AIC1750-DJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDKG	-	AIC1750-DKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDKP	-	AIC1750-DKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDLG	-	AIC1750-DLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDLP	-	AIC1750-DLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDMG	-	AIC1750-DMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDMP	-	AIC1750-DMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDNG	-	AIC1750-DNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDNP	-	AIC1750-DNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDOG	-	AIC1750-DOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDOP	-	AIC1750-DOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDPG	-	AIC1750-DPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDPP	-	AIC1750-DPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDQG	-	AIC1750-DQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDQP	-	AIC1750-DQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDRG	-	AIC1750-DRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDRP	-	AIC1750-DRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDSG	-	AIC1750-DSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDSP	-	AIC1750-DSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDTG	-	AIC1750-DTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDTP	-	AIC1750-DTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDUG	-	AIC1750-DUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDUP	-	AIC1750-DUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDVG	-	AIC1750-DVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDVP	-	AIC1750-DVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDWG	-	AIC1750-DWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDWP	-	AIC1750-DWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDXG	-	AIC1750-DXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVDXP	-	AIC1750-DXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEAG	-	AIC1750-EAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEAP	-	AIC1750-EAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEBG	-	AIC1750-EBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEBP	-	AIC1750-EBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVECG	-	AIC1750-ECGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVECP	-	AIC1750-ECPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEDG	-	AIC1750-EDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEDP	-	AIC1750-EDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEEG	-	AIC1750-EEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEEP	-	AIC1750-EEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEFG	-	AIC1750-EFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEFP	-	AIC1750-EFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEGG	-	AIC1750-EGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEGP	-	AIC1750-EGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEHG	-	AIC1750-EHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEHP	-	AIC1750-EHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEIG	-	AIC1750-EIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEIP	-	AIC1750-EIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEJG	-	AIC1750-EJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEJP	-	AIC1750-EJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEKG	-	AIC1750-EKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEKP	-	AIC1750-EKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVELG	-	AIC1750-ELGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVELP	-	AIC1750-ELPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEMG	-	AIC1750-EMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEMP	-	AIC1750-EMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVENG	-	AIC1750-ENGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVENP	-	AIC1750-ENPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEOG	-	AIC1750-EOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVEOP	-	AIC1750-EOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEPG	-	AIC1750-EPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEPP	-	AIC1750-EPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEQG	-	AIC1750-EQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEQP	-	AIC1750-EQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVERG	-	AIC1750-ERGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVERP	-	AIC1750-ERPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVESG	-	AIC1750-ESGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVESP	-	AIC1750-ESPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVETG	-	AIC1750-ETGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVETP	-	AIC1750-ETPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEUG	-	AIC1750-EUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEUP	-	AIC1750-EUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEVG	-	AIC1750-EVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEVP	-	AIC1750-EVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEWG	-	AIC1750-EWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEWP	-	AIC1750-EWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEXG	-	AIC1750-EXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVEXP	-	AIC1750-EXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFAG	-	AIC1750-FAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFAP	-	AIC1750-FAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFBG	-	AIC1750-FBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFBP	-	AIC1750-FBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFCG	-	AIC1750-FCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFCP	-	AIC1750-FCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFDG	-	AIC1750-FDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFDP	-	AIC1750-FDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFEG	-	AIC1750-FEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFEP	-	AIC1750-FEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFFG	-	AIC1750-FFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFFP	-	AIC1750-FFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFGG	-	AIC1750-FGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFGP	-	AIC1750-FGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFHG	-	AIC1750-FHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFHP	-	AIC1750-FHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFIG	-	AIC1750-FIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFIP	-	AIC1750-FIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFJG	-	AIC1750-FJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFJP	-	AIC1750-FJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFKG	-	AIC1750-FKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFKP	-	AIC1750-FKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFLG	-	AIC1750-FLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFLP	-	AIC1750-FLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFMG	-	AIC1750-FMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFMP	-	AIC1750-FMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFNG	-	AIC1750-FNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFNP	-	AIC1750-FNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFOG	-	AIC1750-FOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFOP	-	AIC1750-FOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFPG	-	AIC1750-FPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFPP	-	AIC1750-FPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFQG	-	AIC1750-FQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFQP	-	AIC1750-FQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFRG	-	AIC1750-FRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFRP	-	AIC1750-FRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFSG	-	AIC1750-FSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFSP	-	AIC1750-FSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFTG	-	AIC1750-FTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFTP	-	AIC1750-FTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFUG	-	AIC1750-FUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFUP	-	AIC1750-FUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFVG	-	AIC1750-FVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFVP	-	AIC1750-FVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFWG	-	AIC1750-FWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFWP	-	AIC1750-FWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFXG	-	AIC1750-FXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVFXP	-	AIC1750-FXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGAG	-	AIC1750-GAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGAP	-	AIC1750-GAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGBG	-	AIC1750-GBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVGBP	-	AIC1750-GBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGCG	-	AIC1750-GCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGCP	-	AIC1750-GCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGDG	-	AIC1750-GDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGDP	-	AIC1750-GDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGEG	-	AIC1750-GEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGEP	-	AIC1750-GEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGFG	-	AIC1750-GFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGFP	-	AIC1750-GFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGGG	-	AIC1750-GGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGGP	-	AIC1750-GGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGHG	-	AIC1750-GHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGHP	-	AIC1750-GHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGIG	-	AIC1750-GIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGIP	-	AIC1750-GIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGJG	-	AIC1750-GJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGJP	-	AIC1750-GJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGKG	-	AIC1750-GKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGKP	-	AIC1750-GKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGLG	-	AIC1750-GLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGLP	-	AIC1750-GLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGMG	-	AIC1750-GMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGMP	-	AIC1750-GMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGNG	-	AIC1750-GNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGNP	-	AIC1750-GNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGOG	-	AIC1750-GOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGOP	-	AIC1750-GOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGPG	-	AIC1750-GPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGPP	-	AIC1750-GPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGQG	-	AIC1750-GQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGQP	-	AIC1750-GQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGRG	-	AIC1750-GRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGRP	-	AIC1750-GRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGSG	-	AIC1750-GSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGSP	-	AIC1750-GSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGTG	-	AIC1750-GTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGTP	-	AIC1750-GTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGUG	-	AIC1750-GUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGUP	-	AIC1750-GUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGVG	-	AIC1750-GVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGVP	-	AIC1750-GVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGWG	-	AIC1750-GWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGWP	-	AIC1750-GWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGXG	-	AIC1750-GXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVGXP	-	AIC1750-GXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHAG	-	AIC1750-HAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHAP	-	AIC1750-HAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHBG	-	AIC1750-HBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHBP	-	AIC1750-HBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHCG	-	AIC1750-HCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHCP	-	AIC1750-HCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHDG	-	AIC1750-HDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHDP	-	AIC1750-HDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHEG	-	AIC1750-HEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHEP	-	AIC1750-HEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHFG	-	AIC1750-HFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHFP	-	AIC1750-HFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHGG	-	AIC1750-HGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHGP	-	AIC1750-HGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHHG	-	AIC1750-HHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHHP	-	AIC1750-HHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHIG	-	AIC1750-HIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHIP	-	AIC1750-HIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHJG	-	AIC1750-HJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHJP	-	AIC1750-HJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHKG	-	AIC1750-HKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHKP	-	AIC1750-HKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHLG	-	AIC1750-HLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHLP	-	AIC1750-HLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHMG	-	AIC1750-HMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVHMP	-	AIC1750-HMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHNG	-	AIC1750-HNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHNP	-	AIC1750-HNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHOG	-	AIC1750-HOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHOP	-	AIC1750-HOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHPG	-	AIC1750-HPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHPP	-	AIC1750-HPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHQG	-	AIC1750-HQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHQP	-	AIC1750-HQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHRG	-	AIC1750-HRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHRP	-	AIC1750-HRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHSG	-	AIC1750-HSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHSP	-	AIC1750-HSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHTG	-	AIC1750-HTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHTP	-	AIC1750-HTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHUG	-	AIC1750-HUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHUP	-	AIC1750-HUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHVG	-	AIC1750-HVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHVP	-	AIC1750-HVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHWG	-	AIC1750-HWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHWP	-	AIC1750-HWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHXG	-	AIC1750-HXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVHXP	-	AIC1750-HXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIAG	-	AIC1750-IAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIAP	-	AIC1750-IAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIBG	-	AIC1750-IBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIBP	-	AIC1750-IBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVICG	-	AIC1750-ICGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVICP	-	AIC1750-ICPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIDG	-	AIC1750-IDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIDP	-	AIC1750-IDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIEG	-	AIC1750-IEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIEP	-	AIC1750-IEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIFG	-	AIC1750-IFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIFP	-	AIC1750-IFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIGG	-	AIC1750-IGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIGP	-	AIC1750-IGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIHG	-	AIC1750-IHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIHP	-	AIC1750-IHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIIG	-	AIC1750-IIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIIP	-	AIC1750-IIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIJG	-	AIC1750-IJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIJP	-	AIC1750-IJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIKG	-	AIC1750-IKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIKP	-	AIC1750-IKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVILG	-	AIC1750-ILGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVILP	-	AIC1750-ILPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIMG	-	AIC1750-IMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIMP	-	AIC1750-IMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVING	-	AIC1750-INGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVINP	-	AIC1750-INPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIOG	-	AIC1750-IOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIOP	-	AIC1750-IOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIPG	-	AIC1750-IPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIPP	-	AIC1750-IPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIQG	-	AIC1750-IQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIQP	-	AIC1750-IQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIRG	-	AIC1750-IRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIRP	-	AIC1750-IRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVISG	-	AIC1750-ISGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVISP	-	AIC1750-ISPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVITG	-	AIC1750-ITGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVITP	-	AIC1750-ITPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIUG	-	AIC1750-IUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIUP	-	AIC1750-IUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIVG	-	AIC1750-IVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIVP	-	AIC1750-IVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIWG	-	AIC1750-IWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIWP	-	AIC1750-IWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVIXG	-	AIC1750-IXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVIXP	-	AIC1750-IXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJAG	-	AIC1750-JAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJAP	-	AIC1750-JAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJBG	-	AIC1750-JBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJBP	-	AIC1750-JBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJCG	-	AIC1750-JCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJCP	-	AIC1750-JCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJDG	-	AIC1750-JDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJDP	-	AIC1750-JDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJEG	-	AIC1750-JEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJEP	-	AIC1750-JEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJFG	-	AIC1750-JFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJFP	-	AIC1750-JFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJGG	-	AIC1750-JGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJGP	-	AIC1750-JGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJHG	-	AIC1750-JHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJHP	-	AIC1750-JHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJIG	-	AIC1750-JIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJIP	-	AIC1750-JIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJJG	-	AIC1750-JJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJJP	-	AIC1750-JJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJKG	-	AIC1750-JKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJKP	-	AIC1750-JKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJLG	-	AIC1750-JLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJLP	-	AIC1750-JLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJMG	-	AIC1750-JMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJMP	-	AIC1750-JMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJNG	-	AIC1750-JNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJNP	-	AIC1750-JNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJOG	-	AIC1750-JOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJOP	-	AIC1750-JOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJPG	-	AIC1750-JPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJPP	-	AIC1750-JPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJQG	-	AIC1750-JQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJQP	-	AIC1750-JQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJRG	-	AIC1750-JRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJRP	-	AIC1750-JRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJSG	-	AIC1750-JSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJSP	-	AIC1750-JSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJTG	-	AIC1750-JTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJTP	-	AIC1750-JTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJUG	-	AIC1750-JUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJUP	-	AIC1750-JUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJVG	-	AIC1750-JVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJVP	-	AIC1750-JVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJWG	-	AIC1750-JWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJWP	-	AIC1750-JWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJXG	-	AIC1750-JXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVJXP	-	AIC1750-JXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKAG	-	AIC1750-KAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKAP	-	AIC1750-KAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKBG	-	AIC1750-KBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKBP	-	AIC1750-KBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKCG	-	AIC1750-KCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKCP	-	AIC1750-KCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKDG	-	AIC1750-KDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKDP	-	AIC1750-KDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKEG	-	AIC1750-KEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKEP	-	AIC1750-KEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKFG	-	AIC1750-KFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKFP	-	AIC1750-KFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKGG	-	AIC1750-KGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKGP	-	AIC1750-KGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKHG	-	AIC1750-KHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKHP	-	AIC1750-KHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKIG	-	AIC1750-KIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKIP	-	AIC1750-KIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKJG	-	AIC1750-KJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKJP	-	AIC1750-KJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKKG	-	AIC1750-KKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVKKP	-	AIC1750-KKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKLG	-	AIC1750-KLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKLP	-	AIC1750-KLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKMG	-	AIC1750-KMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKMP	-	AIC1750-KMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKNG	-	AIC1750-KNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKNP	-	AIC1750-KNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKOG	-	AIC1750-KOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKOP	-	AIC1750-KOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKPG	-	AIC1750-KPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKPP	-	AIC1750-KPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKQG	-	AIC1750-KQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKQP	-	AIC1750-KQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKRG	-	AIC1750-KRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKRP	-	AIC1750-KRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKSG	-	AIC1750-KSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKSP	-	AIC1750-KSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKTG	-	AIC1750-KTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKTP	-	AIC1750-KTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKUG	-	AIC1750-KUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKUP	-	AIC1750-KUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKVG	-	AIC1750-KVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKVP	-	AIC1750-KVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKWG	-	AIC1750-KWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKWP	-	AIC1750-KWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKXG	-	AIC1750-KXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVKXP	-	AIC1750-KXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLAG	-	AIC1750-LAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLAP	-	AIC1750-LAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLBG	-	AIC1750-LBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLBP	-	AIC1750-LBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLCG	-	AIC1750-LCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLCP	-	AIC1750-LCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLDG	-	AIC1750-LDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLDP	-	AIC1750-LDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLEG	-	AIC1750-LEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLEP	-	AIC1750-LEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLFG	-	AIC1750-LFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLFP	-	AIC1750-LFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLGG	-	AIC1750-LGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLGP	-	AIC1750-LGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLHG	-	AIC1750-LHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLHP	-	AIC1750-LHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLIG	-	AIC1750-LIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLIP	-	AIC1750-LIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLJG	-	AIC1750-LJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLJP	-	AIC1750-LJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLKG	-	AIC1750-LKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLKP	-	AIC1750-LKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLLG	-	AIC1750-LLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLLP	-	AIC1750-LLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLMG	-	AIC1750-LMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLMP	-	AIC1750-LMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLNG	-	AIC1750-LNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLNP	-	AIC1750-LNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLOG	-	AIC1750-LOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLOP	-	AIC1750-LOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLPG	-	AIC1750-LPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLPP	-	AIC1750-LPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLQG	-	AIC1750-LQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLQP	-	AIC1750-LQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLRG	-	AIC1750-LRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLRP	-	AIC1750-LRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLSG	-	AIC1750-LSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLSP	-	AIC1750-LSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLTG	-	AIC1750-LTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLTP	-	AIC1750-LTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLUG	-	AIC1750-LUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLUP	-	AIC1750-LUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLVG	-	AIC1750-LVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVLVP	-	AIC1750-LVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLWG	-	AIC1750-LWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLWP	-	AIC1750-LWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLXG	-	AIC1750-LXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVLXP	-	AIC1750-LXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMAG	-	AIC1750-MAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMAP	-	AIC1750-MAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMBG	-	AIC1750-MBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMBP	-	AIC1750-MBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMCG	-	AIC1750-MCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMCP	-	AIC1750-MCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMDG	-	AIC1750-MDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMDP	-	AIC1750-MDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMEG	-	AIC1750-MEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMEP	-	AIC1750-MEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMFG	-	AIC1750-MFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMFP	-	AIC1750-MFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMGG	-	AIC1750-MGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMGP	-	AIC1750-MGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMHG	-	AIC1750-MHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMHP	-	AIC1750-MHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMIG	-	AIC1750-MIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMIP	-	AIC1750-MIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMJG	-	AIC1750-MJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMJP	-	AIC1750-MJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMKG	-	AIC1750-MKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMKP	-	AIC1750-MKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMLG	-	AIC1750-MLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMLP	-	AIC1750-MLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMMG	-	AIC1750-MMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMMP	-	AIC1750-MMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMNG	-	AIC1750-MNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMNP	-	AIC1750-MNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMOG	-	AIC1750-MOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMOP	-	AIC1750-MOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMPG	-	AIC1750-MPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMPP	-	AIC1750-MPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMQG	-	AIC1750-MQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMQP	-	AIC1750-MQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMRG	-	AIC1750-MRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMRP	-	AIC1750-MRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMSG	-	AIC1750-MSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMSP	-	AIC1750-MSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMTG	-	AIC1750-MTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMTP	-	AIC1750-MTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMUG	-	AIC1750-MUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMUP	-	AIC1750-MUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMVG	-	AIC1750-MVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMVP	-	AIC1750-MVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMWG	-	AIC1750-MWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMWP	-	AIC1750-MWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMXG	-	AIC1750-MXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVMXP	-	AIC1750-MXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNAG	-	AIC1750-NAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNAP	-	AIC1750-NAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNBG	-	AIC1750-NBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNBP	-	AIC1750-NBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNCG	-	AIC1750-NCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNCP	-	AIC1750-NCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNDG	-	AIC1750-NDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNDP	-	AIC1750-NDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNEG	-	AIC1750-NEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNEP	-	AIC1750-NEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNFG	-	AIC1750-NFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNFP	-	AIC1750-NFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNGG	-	AIC1750-NGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNGP	-	AIC1750-NGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNHG	-	AIC1750-NHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNHP	-	AIC1750-NHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNIG	-	AIC1750-NIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVNIP	-	AIC1750-NIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNJG	-	AIC1750-NJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNJP	-	AIC1750-NJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNKG	-	AIC1750-NKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNKP	-	AIC1750-NKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNLG	-	AIC1750-NLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNLP	-	AIC1750-NLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNMG	-	AIC1750-NMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNMP	-	AIC1750-NMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNNG	-	AIC1750-NNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNNP	-	AIC1750-NNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNOG	-	AIC1750-NOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNOP	-	AIC1750-NOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNPG	-	AIC1750-NPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNPP	-	AIC1750-NPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNQG	-	AIC1750-NQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNQP	-	AIC1750-NQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNRG	-	AIC1750-NRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNRP	-	AIC1750-NRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNSG	-	AIC1750-NSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNSP	-	AIC1750-NSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNTG	-	AIC1750-NTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNTP	-	AIC1750-NTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNUG	-	AIC1750-NUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNUP	-	AIC1750-NUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNVG	-	AIC1750-NVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNVP	-	AIC1750-NVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNWG	-	AIC1750-NWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNWP	-	AIC1750-NWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNXG	-	AIC1750-NXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVNXP	-	AIC1750-NXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOAG	-	AIC1750-OAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOAP	-	AIC1750-OAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOBG	-	AIC1750-OBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOBP	-	AIC1750-OBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOCG	-	AIC1750-OCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOCP	-	AIC1750-OCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVODG	-	AIC1750-ODGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVODP	-	AIC1750-ODPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOEG	-	AIC1750-OEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOEP	-	AIC1750-OEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOFG	-	AIC1750-OFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOFP	-	AIC1750-OFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOGG	-	AIC1750-OGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOGP	-	AIC1750-OGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOHG	-	AIC1750-OHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOHP	-	AIC1750-OHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOIG	-	AIC1750-OIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOIP	-	AIC1750-OIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOJG	-	AIC1750-OJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOJP	-	AIC1750-OJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOKG	-	AIC1750-OKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOKP	-	AIC1750-OKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOLG	-	AIC1750-OLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOLP	-	AIC1750-OLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOMG	-	AIC1750-OMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOMP	-	AIC1750-OMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVONG	-	AIC1750-ONGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVONP	-	AIC1750-ONPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOOG	-	AIC1750-OOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOOP	-	AIC1750-OOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOPG	-	AIC1750-OPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOPP	-	AIC1750-OPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOQG	-	AIC1750-OQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOQP	-	AIC1750-OQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVORG	-	AIC1750-ORGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVORP	-	AIC1750-ORPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOSG	-	AIC1750-OSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOSP	-	AIC1750-OSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOTG	-	AIC1750-OTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVOTP	-	AIC1750-OTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOUG	-	AIC1750-OUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOUP	-	AIC1750-OUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOVG	-	AIC1750-OVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOVP	-	AIC1750-OVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOWG	-	AIC1750-OWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOWP	-	AIC1750-OWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOXG	-	AIC1750-OXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVOXP	-	AIC1750-OXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPAG	-	AIC1750-PAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPAP	-	AIC1750-PAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPBG	-	AIC1750-PBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPBP	-	AIC1750-PBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPCG	-	AIC1750-PCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPCP	-	AIC1750-PCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPDG	-	AIC1750-PDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPDP	-	AIC1750-PDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPEG	-	AIC1750-PEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPEP	-	AIC1750-PEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPFG	-	AIC1750-PFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPFP	-	AIC1750-PFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPGG	-	AIC1750-PGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPGP	-	AIC1750-PGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPHG	-	AIC1750-PHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPHP	-	AIC1750-PHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPIG	-	AIC1750-PIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPIP	-	AIC1750-PIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPJG	-	AIC1750-PJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPJP	-	AIC1750-PJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPKG	-	AIC1750-PKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPKP	-	AIC1750-PKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPLG	-	AIC1750-PLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPLP	-	AIC1750-PLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPMG	-	AIC1750-PMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPMP	-	AIC1750-PMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPNG	-	AIC1750-PNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPNP	-	AIC1750-PNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPOG	-	AIC1750-POGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPOP	-	AIC1750-POPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPPG	-	AIC1750-PPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPPP	-	AIC1750-PPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPQG	-	AIC1750-PQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPQP	-	AIC1750-PQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPRG	-	AIC1750-PRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPRP	-	AIC1750-PRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPSG	-	AIC1750-PSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPSP	-	AIC1750-PSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPTG	-	AIC1750-PTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPTP	-	AIC1750-PTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPUG	-	AIC1750-PUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPUP	-	AIC1750-PUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPVG	-	AIC1750-PVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPVP	-	AIC1750-PVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPWG	-	AIC1750-PWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPWP	-	AIC1750-PWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPXG	-	AIC1750-PXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVPXP	-	AIC1750-PXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQAG	-	AIC1750-QAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQAP	-	AIC1750-QAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQBG	-	AIC1750-QBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQBP	-	AIC1750-QBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQCG	-	AIC1750-QCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQCP	-	AIC1750-QCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQDG	-	AIC1750-QDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQDP	-	AIC1750-QDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQEG	-	AIC1750-QEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQEP	-	AIC1750-QEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQFG	-	AIC1750-QFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQFP	-	AIC1750-QFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQGG	-	AIC1750-QGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVQGP	-	AIC1750-QGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQHG	-	AIC1750-QHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQHP	-	AIC1750-QHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQIG	-	AIC1750-QIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQIP	-	AIC1750-QIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQJG	-	AIC1750-QJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQJP	-	AIC1750-QJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQKG	-	AIC1750-QKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQKP	-	AIC1750-QKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQLG	-	AIC1750-QLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQLP	-	AIC1750-QLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQMG	-	AIC1750-QMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQMP	-	AIC1750-QMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQNG	-	AIC1750-QNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQNP	-	AIC1750-QNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQOG	-	AIC1750-QOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQOP	-	AIC1750-QOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQPG	-	AIC1750-QPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQPP	-	AIC1750-QPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQQG	-	AIC1750-QQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQQP	-	AIC1750-QQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQRG	-	AIC1750-QRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQRP	-	AIC1750-QRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQSG	-	AIC1750-QSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQSP	-	AIC1750-QSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQTG	-	AIC1750-QTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQTP	-	AIC1750-QTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQUG	-	AIC1750-QUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQUP	-	AIC1750-QUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQVG	-	AIC1750-QVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQVP	-	AIC1750-QVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQWG	-	AIC1750-QWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQWP	-	AIC1750-QWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQXG	-	AIC1750-QXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVQXP	-	AIC1750-QXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRAG	-	AIC1750-RAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRAP	-	AIC1750-RAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRBG	-	AIC1750-RBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRBP	-	AIC1750-RBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRCG	-	AIC1750-RCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRCP	-	AIC1750-RCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRDG	-	AIC1750-RDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRDP	-	AIC1750-RDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVREG	-	AIC1750-REGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVREP	-	AIC1750-REPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRFG	-	AIC1750-RFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRFP	-	AIC1750-RFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRGG	-	AIC1750-RGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRGP	-	AIC1750-RGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRHG	-	AIC1750-RHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRHP	-	AIC1750-RHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRIG	-	AIC1750-RIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRIP	-	AIC1750-RIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRJG	-	AIC1750-RJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRJP	-	AIC1750-RJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRKG	-	AIC1750-RKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRKP	-	AIC1750-RKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRLG	-	AIC1750-RLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRLP	-	AIC1750-RLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRMG	-	AIC1750-RMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRMP	-	AIC1750-RMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRNG	-	AIC1750-RNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRNP	-	AIC1750-RNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVROG	-	AIC1750-ROGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVROP	-	AIC1750-ROPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRPG	-	AIC1750-RPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRPP	-	AIC1750-RPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRQG	-	AIC1750-RQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRQP	-	AIC1750-RQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRRG	-	AIC1750-RRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVRRP	-	AIC1750-RRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRSG	-	AIC1750-RSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRSP	-	AIC1750-RSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRTG	-	AIC1750-RTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRTP	-	AIC1750-RTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRUG	-	AIC1750-RUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRUP	-	AIC1750-RUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRVG	-	AIC1750-RVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRVP	-	AIC1750-RVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRWG	-	AIC1750-RWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRWP	-	AIC1750-RWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRXG	-	AIC1750-RXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVRXP	-	AIC1750-RXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSAG	-	AIC1750-SAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSAP	-	AIC1750-SAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSBG	-	AIC1750-SBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSBP	-	AIC1750-SBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSCG	-	AIC1750-SCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSCP	-	AIC1750-SCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSDG	-	AIC1750-SDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSDP	-	AIC1750-SDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSEG	-	AIC1750-SEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSEP	-	AIC1750-SEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSFG	-	AIC1750-SFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSFP	-	AIC1750-SFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSGG	-	AIC1750-SGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSGP	-	AIC1750-SGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSHG	-	AIC1750-SHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSHP	-	AIC1750-SHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSIG	-	AIC1750-SIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSIP	-	AIC1750-SIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSJG	-	AIC1750-SJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSJP	-	AIC1750-SJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSKG	-	AIC1750-SKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSKP	-	AIC1750-SKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSLG	-	AIC1750-SLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSLP	-	AIC1750-SLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSMG	-	AIC1750-SMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSMP	-	AIC1750-SMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSNG	-	AIC1750-SNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSNP	-	AIC1750-SNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSOG	-	AIC1750-SOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSOP	-	AIC1750-SOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSPG	-	AIC1750-SPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSPP	-	AIC1750-SPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSQG	-	AIC1750-SQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSQP	-	AIC1750-SQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSRG	-	AIC1750-SRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSRP	-	AIC1750-SRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSSG	-	AIC1750-SSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSSP	-	AIC1750-SSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSTG	-	AIC1750-STGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSTP	-	AIC1750-STPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSUG	-	AIC1750-SUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSUP	-	AIC1750-SUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSVG	-	AIC1750-SVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSVP	-	AIC1750-SVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSWG	-	AIC1750-SWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSWP	-	AIC1750-SWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSXG	-	AIC1750-SXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVSXP	-	AIC1750-SXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTAG	-	AIC1750-TAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTAP	-	AIC1750-TAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTBG	-	AIC1750-TBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTBP	-	AIC1750-TBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTCG	-	AIC1750-TCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTCP	-	AIC1750-TCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTDG	-	AIC1750-TDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTDP	-	AIC1750-TDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTEG	-	AIC1750-TEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVTEP	-	AIC1750-TEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTFG	-	AIC1750-TFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTFP	-	AIC1750-TFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTGG	-	AIC1750-TGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTGP	-	AIC1750-TGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTHG	-	AIC1750-THGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTHP	-	AIC1750-THPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTIG	-	AIC1750-TIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTIP	-	AIC1750-TIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTJG	-	AIC1750-TJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTJP	-	AIC1750-TJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTKG	-	AIC1750-TKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTKP	-	AIC1750-TKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTLG	-	AIC1750-TLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTLP	-	AIC1750-TLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTMG	-	AIC1750-TMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTMP	-	AIC1750-TMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTNG	-	AIC1750-TNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTNP	-	AIC1750-TNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTOG	-	AIC1750-TOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTOP	-	AIC1750-TOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTPG	-	AIC1750-TPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTPP	-	AIC1750-TPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTQG	-	AIC1750-TQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTQP	-	AIC1750-TQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTRG	-	AIC1750-TRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTRP	-	AIC1750-TRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTSG	-	AIC1750-TSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTSP	-	AIC1750-TSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTTG	-	AIC1750-TTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTTP	-	AIC1750-TTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTUG	-	AIC1750-TUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTUP	-	AIC1750-TUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTVG	-	AIC1750-TVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTVP	-	AIC1750-TVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTWG	-	AIC1750-TWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTWP	-	AIC1750-TWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTXG	-	AIC1750-TXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVTXP	-	AIC1750-TXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUAG	-	AIC1750-UAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUAP	-	AIC1750-UAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUBG	-	AIC1750-UBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUBP	-	AIC1750-UBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUCG	-	AIC1750-UCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUCP	-	AIC1750-UCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUDG	-	AIC1750-UDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUDP	-	AIC1750-UDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUEG	-	AIC1750-UEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUEP	-	AIC1750-UEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUFG	-	AIC1750-UFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUFP	-	AIC1750-UFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUGG	-	AIC1750-UGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUGP	-	AIC1750-UGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUHG	-	AIC1750-UHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUHP	-	AIC1750-UHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUIG	-	AIC1750-UIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUIP	-	AIC1750-UIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUJG	-	AIC1750-UJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUJP	-	AIC1750-UJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUKG	-	AIC1750-UKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUKP	-	AIC1750-UKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVULG	-	AIC1750-ULGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVULP	-	AIC1750-ULPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUMG	-	AIC1750-UMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUMP	-	AIC1750-UMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUNG	-	AIC1750-UNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUNP	-	AIC1750-UNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUOG	-	AIC1750-UOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUOP	-	AIC1750-UOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUPG	-	AIC1750-UPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVUPP	-	AIC1750-UPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUQG	-	AIC1750-UQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUQP	-	AIC1750-UQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVURG	-	AIC1750-URGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVURP	-	AIC1750-URPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUSG	-	AIC1750-USGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUSP	-	AIC1750-USPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUTG	-	AIC1750-UTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUTP	-	AIC1750-UTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUUG	-	AIC1750-UUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUUP	-	AIC1750-UUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUVG	-	AIC1750-UVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUVP	-	AIC1750-UVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUWG	-	AIC1750-UWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUWP	-	AIC1750-UWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUXG	-	AIC1750-UXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVUXP	-	AIC1750-UXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVAG	-	AIC1750-VAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVAP	-	AIC1750-VAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVBG	-	AIC1750-VBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVBP	-	AIC1750-VBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVCG	-	AIC1750-VCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVCP	-	AIC1750-VCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVDG	-	AIC1750-VDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVDP	-	AIC1750-VDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVEG	-	AIC1750-VEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVEP	-	AIC1750-VEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVFG	-	AIC1750-VFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVFP	-	AIC1750-VFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVGG	-	AIC1750-VGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVGP	-	AIC1750-VGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVHG	-	AIC1750-VHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVHP	-	AIC1750-VHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVIG	-	AIC1750-VIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVIP	-	AIC1750-VIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVJG	-	AIC1750-VJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVJP	-	AIC1750-VJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVKG	-	AIC1750-VKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVKP	-	AIC1750-VKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVLG	-	AIC1750-VLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVLP	-	AIC1750-VLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVMG	-	AIC1750-VMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVMP	-	AIC1750-VMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVNG	-	AIC1750-VNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVNP	-	AIC1750-VNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVOG	-	AIC1750-VOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVOP	-	AIC1750-VOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVPG	-	AIC1750-VPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVPP	-	AIC1750-VPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVQG	-	AIC1750-VQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVQP	-	AIC1750-VQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVRG	-	AIC1750-VRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVRP	-	AIC1750-VRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVSG	-	AIC1750-VSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVSP	-	AIC1750-VSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVTG	-	AIC1750-VTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVTP	-	AIC1750-VTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVUG	-	AIC1750-VUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVUP	-	AIC1750-VUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVVG	-	AIC1750-VVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVVP	-	AIC1750-VVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVWG	-	AIC1750-VWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVWP	-	AIC1750-VWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVXG	-	AIC1750-VXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVVXP	-	AIC1750-VXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWAG	-	AIC1750-WAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWAP	-	AIC1750-WAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWBG	-	AIC1750-WBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWBP	-	AIC1750-WBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWCG	-	AIC1750-WCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVWCP	-	AIC1750-WCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWDG	-	AIC1750-WDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWDP	-	AIC1750-WDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWEG	-	AIC1750-WEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWEP	-	AIC1750-WEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWFG	-	AIC1750-WFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWFP	-	AIC1750-WFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWGG	-	AIC1750-WGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWGP	-	AIC1750-WGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWHG	-	AIC1750-WHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWHP	-	AIC1750-WHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWIG	-	AIC1750-WIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWIP	-	AIC1750-WIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWJG	-	AIC1750-WJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWJP	-	AIC1750-WJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWKG	-	AIC1750-WKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWKP	-	AIC1750-WKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWLG	-	AIC1750-WLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWLP	-	AIC1750-WLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWMG	-	AIC1750-WMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWMP	-	AIC1750-WMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWNG	-	AIC1750-WNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWNP	-	AIC1750-WNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWOG	-	AIC1750-WOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWOP	-	AIC1750-WOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWPG	-	AIC1750-WPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWPP	-	AIC1750-WPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWQG	-	AIC1750-WQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWQP	-	AIC1750-WQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWRG	-	AIC1750-WRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWRP	-	AIC1750-WRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWSG	-	AIC1750-WSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWSP	-	AIC1750-WSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWTG	-	AIC1750-WTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWTP	-	AIC1750-WTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWUG	-	AIC1750-WUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWUP	-	AIC1750-WUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWVG	-	AIC1750-WVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWVP	-	AIC1750-WVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWWG	-	AIC1750-WWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWWP	-	AIC1750-WWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWXG	-	AIC1750-WXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVWXP	-	AIC1750-WXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXAG	-	AIC1750-XAGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXAP	-	AIC1750-XAPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXBG	-	AIC1750-XBGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXBP	-	AIC1750-XBPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXCG	-	AIC1750-XCGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXCP	-	AIC1750-XCPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXDG	-	AIC1750-XDGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXDP	-	AIC1750-XDPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXEG	-	AIC1750-XEGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXEP	-	AIC1750-XEPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXFG	-	AIC1750-XFGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXFP	-	AIC1750-XFPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXGG	-	AIC1750-XGGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXGP	-	AIC1750-XGPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXHG	-	AIC1750-XHGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXHP	-	AIC1750-XHPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXIG	-	AIC1750-XIGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXIP	-	AIC1750-XIPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXJG	-	AIC1750-XJGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXJP	-	AIC1750-XJPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXKG	-	AIC1750-XKGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXKP	-	AIC1750-XKPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXLG	-	AIC1750-XLGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXLP	-	AIC1750-XLPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXMG	-	AIC1750-XMGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXMP	-	AIC1750-XMPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXNG	-	AIC1750-XNGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVXNP	-	AIC1750-XNPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXOG	-	AIC1750-XOGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXOP	-	AIC1750-XOPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXPG	-	AIC1750-XPGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXPP	-	AIC1750-XPPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXQG	-	AIC1750-XQGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXQP	-	AIC1750-XQPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXRG	-	AIC1750-XRGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXRP	-	AIC1750-XRPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXSG	-	AIC1750-XSGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXSP	-	AIC1750-XSPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXTG	-	AIC1750-XTGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXTP	-	AIC1750-XTPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXUG	-	AIC1750-XUGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXUP	-	AIC1750-XUPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXVG	-	AIC1750-XVGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXVP	-	AIC1750-XVPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXWG	-	AIC1750-XWGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXWP	-	AIC1750-XWPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXXG	-	AIC1750-XXGGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BVXXP	-	AIC1750-XXPGT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
BW	-	R5421N130F	BM-IC	Li-Ion, over-charge/discharge protection, Vd=3V	SOT-23-6	xj	VBM1	7da	Ric
BWAAG	-	AIC1750-AAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAAP	-	AIC1750-AAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWABG	-	AIC1750-ABGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWABP	-	AIC1750-ABPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWACG	-	AIC1750-ACGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWACP	-	AIC1750-ACPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWADG	-	AIC1750-ADGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWADP	-	AIC1750-ADPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAEG	-	AIC1750-AEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAEP	-	AIC1750-AEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAFG	-	AIC1750-AFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAFP	-	AIC1750-AFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAGG	-	AIC1750-AGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAGP	-	AIC1750-AGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAHG	-	AIC1750-AHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAHP	-	AIC1750-AHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAIG	-	AIC1750-AIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAIP	-	AIC1750-AIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAJG	-	AIC1750-AJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAJP	-	AIC1750-AJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAKG	-	AIC1750-AKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAKP	-	AIC1750-AKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWALG	-	AIC1750-ALGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWALP	-	AIC1750-ALPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAMG	-	AIC1750-AMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAMP	-	AIC1750-AMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWANG	-	AIC1750-ANGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWANP	-	AIC1750-ANPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAOG	-	AIC1750-AOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAOP	-	AIC1750-AOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAPG	-	AIC1750-APGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAPP	-	AIC1750-APPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAQG	-	AIC1750-AQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAQP	-	AIC1750-AQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWARG	-	AIC1750-ARGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWARP	-	AIC1750-ARPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWASG	-	AIC1750-ASGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWASP	-	AIC1750-ASPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWATG	-	AIC1750-ATGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWATP	-	AIC1750-ATPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAUG	-	AIC1750-AUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAUP	-	AIC1750-AUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAVG	-	AIC1750-AVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAVP	-	AIC1750-AVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAWG	-	AIC1750-AWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAWP	-	AIC1750-AWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAXG	-	AIC1750-AXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWAXP	-	AIC1750-AXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWBAG	-	AIC1750-BAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBAP	-	AIC1750-BAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBBG	-	AIC1750-BBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBBP	-	AIC1750-BBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBCG	-	AIC1750-BCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBCP	-	AIC1750-BCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBDG	-	AIC1750-BDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBDP	-	AIC1750-BDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBEG	-	AIC1750-BEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBEP	-	AIC1750-BEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBFG	-	AIC1750-BFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBFP	-	AIC1750-BFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBGG	-	AIC1750-BGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBGP	-	AIC1750-BGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBHG	-	AIC1750-BHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBHP	-	AIC1750-BHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBIG	-	AIC1750-BIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBIP	-	AIC1750-BIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBJG	-	AIC1750-BJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBJP	-	AIC1750-BJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBKG	-	AIC1750-BKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBKP	-	AIC1750-BKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBLG	-	AIC1750-BLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBLP	-	AIC1750-BLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBMG	-	AIC1750-BMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBMP	-	AIC1750-BMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBNG	-	AIC1750-BNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBNP	-	AIC1750-BNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBOG	-	AIC1750-BOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBOP	-	AIC1750-BOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBPG	-	AIC1750-BPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBPP	-	AIC1750-BPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBQG	-	AIC1750-BQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBQP	-	AIC1750-BQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBRG	-	AIC1750-BRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBRP	-	AIC1750-BRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBSG	-	AIC1750-BSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBSP	-	AIC1750-BSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBTG	-	AIC1750-BTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBTP	-	AIC1750-BTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBUG	-	AIC1750-BUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBUP	-	AIC1750-BUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBVG	-	AIC1750-BVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBVP	-	AIC1750-BVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBWG	-	AIC1750-BWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBWP	-	AIC1750-BWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBXG	-	AIC1750-BXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWBXP	-	AIC1750-BXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCAG	-	AIC1750-CAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCAP	-	AIC1750-CAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCBG	-	AIC1750-CBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCBP	-	AIC1750-CBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCCG	-	AIC1750-CCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCCP	-	AIC1750-CCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCDG	-	AIC1750-CDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCDP	-	AIC1750-CDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCEG	-	AIC1750-CEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCEP	-	AIC1750-CEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCFG	-	AIC1750-CFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCFP	-	AIC1750-CFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCGG	-	AIC1750-CGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCGP	-	AIC1750-CGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCHG	-	AIC1750-CHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCHP	-	AIC1750-CHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCIG	-	AIC1750-CIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCIP	-	AIC1750-CIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCJG	-	AIC1750-CJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCJP	-	AIC1750-CJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCKG	-	AIC1750-CKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCKP	-	AIC1750-CKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWCLG	-	AIC1750-CLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCLP	-	AIC1750-CLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCMG	-	AIC1750-CMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCMP	-	AIC1750-CMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCNG	-	AIC1750-CNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCNP	-	AIC1750-CNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCOG	-	AIC1750-COGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCOP	-	AIC1750-COPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCPG	-	AIC1750-CPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCPP	-	AIC1750-CPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCQG	-	AIC1750-CQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCQP	-	AIC1750-CQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCRG	-	AIC1750-CRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCRP	-	AIC1750-CRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCSG	-	AIC1750-CSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCSP	-	AIC1750-CSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCTG	-	AIC1750-CYGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCTP	-	AIC1750-CYPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCUG	-	AIC1750-CUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCUP	-	AIC1750-CUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCVG	-	AIC1750-CVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCVP	-	AIC1750-CVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCWG	-	AIC1750-CWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCWP	-	AIC1750-CWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCXG	-	AIC1750-CXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWCXP	-	AIC1750-CXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDAG	-	AIC1750-DAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDAP	-	AIC1750-DAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDBG	-	AIC1750-DBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDBP	-	AIC1750-DBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDCG	-	AIC1750-DCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDCP	-	AIC1750-DCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDDG	-	AIC1750-DDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDDP	-	AIC1750-DDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDEG	-	AIC1750-DEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDEP	-	AIC1750-DEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDFG	-	AIC1750-DFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDFP	-	AIC1750-DFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDGG	-	AIC1750-DGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDGP	-	AIC1750-DGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDHG	-	AIC1750-DHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDHP	-	AIC1750-DHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDIG	-	AIC1750-DIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDIP	-	AIC1750-DIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDJG	-	AIC1750-DJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDJP	-	AIC1750-DJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDKG	-	AIC1750-DKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDKP	-	AIC1750-DKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDLG	-	AIC1750-DLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDLP	-	AIC1750-DLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDMG	-	AIC1750-DMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDMP	-	AIC1750-DMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDNG	-	AIC1750-DNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDNP	-	AIC1750-DNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDOG	-	AIC1750-DOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDOP	-	AIC1750-DOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDPG	-	AIC1750-DPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDPP	-	AIC1750-DPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDQG	-	AIC1750-DQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDQP	-	AIC1750-DQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDRG	-	AIC1750-DRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDRP	-	AIC1750-DRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDSG	-	AIC1750-DSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDSP	-	AIC1750-DSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDTG	-	AIC1750-DTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDTP	-	AIC1750-DTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDUG	-	AIC1750-DUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDUP	-	AIC1750-DUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDVG	-	AIC1750-DVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDVP	-	AIC1750-DVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWDWG	-	AIC1750-DWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDWP	-	AIC1750-DWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDXG	-	AIC1750-DXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWDXP	-	AIC1750-DXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEAG	-	AIC1750-EAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEAP	-	AIC1750-EAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEBG	-	AIC1750-EBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEBP	-	AIC1750-EBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWECG	-	AIC1750-ECGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWECP	-	AIC1750-ECPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEDG	-	AIC1750-EDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEDP	-	AIC1750-EDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEEG	-	AIC1750-EEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEEP	-	AIC1750-EEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEFG	-	AIC1750-EFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEFP	-	AIC1750-EFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEGG	-	AIC1750-EGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEGP	-	AIC1750-EGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEHG	-	AIC1750-EHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEHP	-	AIC1750-EHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEIG	-	AIC1750-EIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEIP	-	AIC1750-EIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEJG	-	AIC1750-EJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEJP	-	AIC1750-EJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEKG	-	AIC1750-EKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEKP	-	AIC1750-EKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWELG	-	AIC1750-ELGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWELP	-	AIC1750-ELPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEMG	-	AIC1750-EMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEMP	-	AIC1750-EMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWENG	-	AIC1750-ENGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWENP	-	AIC1750-ENPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEOG	-	AIC1750-EOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEOP	-	AIC1750-EOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEPG	-	AIC1750-EPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEPP	-	AIC1750-EPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEQG	-	AIC1750-EQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEQP	-	AIC1750-EQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWERG	-	AIC1750-ERGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWERP	-	AIC1750-ERPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWESG	-	AIC1750-ESGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWESP	-	AIC1750-ESPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWETG	-	AIC1750-ETGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWETP	-	AIC1750-ETPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEUG	-	AIC1750-EUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEUP	-	AIC1750-EUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEVG	-	AIC1750-EVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEVP	-	AIC1750-EVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEWG	-	AIC1750-EWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEWP	-	AIC1750-EWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEXG	-	AIC1750-EXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWEXP	-	AIC1750-EXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFAG	-	AIC1750-FAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFAP	-	AIC1750-FAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFBG	-	AIC1750-FBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFBP	-	AIC1750-FBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFCG	-	AIC1750-FCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFCP	-	AIC1750-FCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFDG	-	AIC1750-FDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFDP	-	AIC1750-FDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFEG	-	AIC1750-FEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFEP	-	AIC1750-FEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFFG	-	AIC1750-FFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFFP	-	AIC1750-FFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFGG	-	AIC1750-FGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFGP	-	AIC1750-FGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFHG	-	AIC1750-FHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFHP	-	AIC1750-FHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFIG	-	AIC1750-FIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFIP	-	AIC1750-FIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWFJG	-	AIC1750-FJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFJP	-	AIC1750-FJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFKG	-	AIC1750-FKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFKP	-	AIC1750-FKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFLG	-	AIC1750-FLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFLP	-	AIC1750-FLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFMG	-	AIC1750-FMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFMP	-	AIC1750-FMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFNG	-	AIC1750-FNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFNP	-	AIC1750-FNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFOG	-	AIC1750-FOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFOP	-	AIC1750-FOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFPG	-	AIC1750-FPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFPP	-	AIC1750-FPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFQG	-	AIC1750-FQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFQP	-	AIC1750-FQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFRG	-	AIC1750-FRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFRP	-	AIC1750-FRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFSG	-	AIC1750-FSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFSP	-	AIC1750-FSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFTG	-	AIC1750-FTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFTP	-	AIC1750-FTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFUG	-	AIC1750-FUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFUP	-	AIC1750-FUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFVG	-	AIC1750-FVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFVP	-	AIC1750-FVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFWG	-	AIC1750-FWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFWP	-	AIC1750-FWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFXG	-	AIC1750-FXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWFXP	-	AIC1750-FXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGAG	-	AIC1750-GAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGAP	-	AIC1750-GAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGBG	-	AIC1750-GBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGBP	-	AIC1750-GBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGCG	-	AIC1750-GCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGCP	-	AIC1750-GCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGDG	-	AIC1750-GDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGDP	-	AIC1750-GDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGEG	-	AIC1750-GEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGEP	-	AIC1750-GEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGFG	-	AIC1750-GFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGFP	-	AIC1750-GFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGGG	-	AIC1750-GGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGGP	-	AIC1750-GGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGHG	-	AIC1750-GHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGHP	-	AIC1750-GHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGIG	-	AIC1750-GIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGIP	-	AIC1750-GIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGJG	-	AIC1750-GJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGJP	-	AIC1750-GJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGKG	-	AIC1750-GKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGKP	-	AIC1750-GKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGLG	-	AIC1750-GLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGLP	-	AIC1750-GLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGMG	-	AIC1750-GMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGMP	-	AIC1750-GMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGNG	-	AIC1750-GNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGNP	-	AIC1750-GNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGOG	-	AIC1750-GOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGOP	-	AIC1750-GOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGPG	-	AIC1750-GPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGPP	-	AIC1750-GPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGQG	-	AIC1750-GQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGQP	-	AIC1750-GQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGRG	-	AIC1750-GRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGRP	-	AIC1750-GRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGSG	-	AIC1750-GSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGSP	-	AIC1750-GSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGTG	-	AIC1750-GTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGTP	-	AIC1750-GTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWGUG	-	AIC1750-GUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGUP	-	AIC1750-GUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGVG	-	AIC1750-GVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGVP	-	AIC1750-GVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGWG	-	AIC1750-GWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGWP	-	AIC1750-GWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGXG	-	AIC1750-GXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWGXP	-	AIC1750-GXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHAG	-	AIC1750-HAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHAP	-	AIC1750-HAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHBG	-	AIC1750-HBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHBP	-	AIC1750-HBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHCG	-	AIC1750-HCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHCP	-	AIC1750-HCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHDG	-	AIC1750-HDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHDP	-	AIC1750-HDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHEG	-	AIC1750-HEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHEP	-	AIC1750-HEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHFG	-	AIC1750-HFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHFP	-	AIC1750-HFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHGG	-	AIC1750-HGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHGP	-	AIC1750-HGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHHG	-	AIC1750-HHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHHP	-	AIC1750-HHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHIG	-	AIC1750-HIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHIP	-	AIC1750-HIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHJG	-	AIC1750-HJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHJP	-	AIC1750-HJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHKG	-	AIC1750-HKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHKP	-	AIC1750-HKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHLG	-	AIC1750-HLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHLP	-	AIC1750-HLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHMG	-	AIC1750-HMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHMP	-	AIC1750-HMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHNG	-	AIC1750-HNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHNP	-	AIC1750-HNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHOG	-	AIC1750-HOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHOP	-	AIC1750-HOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHPG	-	AIC1750-HPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHPP	-	AIC1750-HPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHQG	-	AIC1750-HQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHQP	-	AIC1750-HQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHRG	-	AIC1750-HRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHRP	-	AIC1750-HRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHSG	-	AIC1750-HSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHSP	-	AIC1750-HSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHTG	-	AIC1750-HTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHTP	-	AIC1750-HTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHUG	-	AIC1750-HUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHUP	-	AIC1750-HUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHVG	-	AIC1750-HVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHVP	-	AIC1750-HVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHWG	-	AIC1750-HWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHWP	-	AIC1750-HWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHXG	-	AIC1750-HXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWHXP	-	AIC1750-HXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIAG	-	AIC1750-IAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIAP	-	AIC1750-IAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIBG	-	AIC1750-IBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIBP	-	AIC1750-IBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWICG	-	AIC1750-ICGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWICP	-	AIC1750-ICPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIDG	-	AIC1750-IDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIDP	-	AIC1750-IDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIEG	-	AIC1750-IEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIEP	-	AIC1750-IEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIFG	-	AIC1750-IFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIFP	-	AIC1750-IFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIGG	-	AIC1750-IGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIGP	-	AIC1750-IGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWIHG	-	AIC1750-IHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIHP	-	AIC1750-IHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIIG	-	AIC1750-IIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIIP	-	AIC1750-IIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIJG	-	AIC1750-IJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIJP	-	AIC1750-IJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIKG	-	AIC1750-IKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIKP	-	AIC1750-IKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWILG	-	AIC1750-ILGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWILP	-	AIC1750-ILPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIMG	-	AIC1750-IMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIMP	-	AIC1750-IMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWING	-	AIC1750-INGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWINP	-	AIC1750-INPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIOG	-	AIC1750-IOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIOP	-	AIC1750-IOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIPG	-	AIC1750-IPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIPP	-	AIC1750-IPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIQG	-	AIC1750-IQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIQP	-	AIC1750-IQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIRG	-	AIC1750-IRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIRP	-	AIC1750-IRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWISG	-	AIC1750-ISGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWISP	-	AIC1750-ISPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWITG	-	AIC1750-ITGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWITP	-	AIC1750-ITPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIUG	-	AIC1750-IUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIUP	-	AIC1750-IUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIVG	-	AIC1750-IVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIVP	-	AIC1750-IVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIWG	-	AIC1750-IWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIWP	-	AIC1750-IWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIXG	-	AIC1750-IXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWIXP	-	AIC1750-IXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJAG	-	AIC1750-JAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJAP	-	AIC1750-JAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJBG	-	AIC1750-JBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJBP	-	AIC1750-JBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJCG	-	AIC1750-JCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJCP	-	AIC1750-JCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJDG	-	AIC1750-JDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJDP	-	AIC1750-JDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJEG	-	AIC1750-JEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJEP	-	AIC1750-JEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJFG	-	AIC1750-JFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJFP	-	AIC1750-JFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJGG	-	AIC1750-JGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJGP	-	AIC1750-JGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJHG	-	AIC1750-JHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJHP	-	AIC1750-JHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJIG	-	AIC1750-JIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJIP	-	AIC1750-JIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJJG	-	AIC1750-JJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJJP	-	AIC1750-JJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJKG	-	AIC1750-JKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJKP	-	AIC1750-JKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJLG	-	AIC1750-JLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJLP	-	AIC1750-JLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJMG	-	AIC1750-JMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJMP	-	AIC1750-JMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJNG	-	AIC1750-JNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJNP	-	AIC1750-JNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJOG	-	AIC1750-JOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJOP	-	AIC1750-JOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJPG	-	AIC1750-JPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJPP	-	AIC1750-JPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJQG	-	AIC1750-JQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJQP	-	AIC1750-JQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJRG	-	AIC1750-JRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJRP	-	AIC1750-JRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWJSG	-	AIC1750-JSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJSP	-	AIC1750-JSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJTG	-	AIC1750-JTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJTP	-	AIC1750-JTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJUG	-	AIC1750-JUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJUP	-	AIC1750-JUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJVG	-	AIC1750-JVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJVP	-	AIC1750-JVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJWG	-	AIC1750-JWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJWP	-	AIC1750-JWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJXG	-	AIC1750-JXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWJXP	-	AIC1750-JXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKAG	-	AIC1750-KAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKAP	-	AIC1750-KAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKBG	-	AIC1750-KBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKBP	-	AIC1750-KBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKCG	-	AIC1750-KCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKCP	-	AIC1750-KCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKDG	-	AIC1750-KDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKDP	-	AIC1750-KDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKEG	-	AIC1750-KEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKEP	-	AIC1750-KEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKFG	-	AIC1750-KFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKFP	-	AIC1750-KFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKGG	-	AIC1750-KGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKGP	-	AIC1750-KGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKHG	-	AIC1750-KHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKHP	-	AIC1750-KHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKIG	-	AIC1750-KIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKIP	-	AIC1750-KIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKJG	-	AIC1750-KJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKJP	-	AIC1750-KJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKKG	-	AIC1750-KKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKKP	-	AIC1750-KKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKLG	-	AIC1750-KLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKLP	-	AIC1750-KLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKMG	-	AIC1750-KMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKMP	-	AIC1750-KMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKNG	-	AIC1750-KNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKNP	-	AIC1750-KNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKOG	-	AIC1750-KOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKOP	-	AIC1750-KOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKPG	-	AIC1750-KPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKPP	-	AIC1750-KPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKQG	-	AIC1750-KQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKQP	-	AIC1750-KQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKRG	-	AIC1750-KRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKRP	-	AIC1750-KRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKSG	-	AIC1750-KSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKSP	-	AIC1750-KSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKTG	-	AIC1750-KTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKTP	-	AIC1750-KTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKUG	-	AIC1750-KUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKUP	-	AIC1750-KUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKVG	-	AIC1750-KVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKVP	-	AIC1750-KVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKWG	-	AIC1750-KWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKWP	-	AIC1750-KWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKXG	-	AIC1750-KXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWKXP	-	AIC1750-KXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLAG	-	AIC1750-LAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLAP	-	AIC1750-LAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLBG	-	AIC1750-LBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLBP	-	AIC1750-LBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLCG	-	AIC1750-LCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLCP	-	AIC1750-LCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLDG	-	AIC1750-LDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLDP	-	AIC1750-LDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLEG	-	AIC1750-LEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLEP	-	AIC1750-LEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWLFG	-	AIC1750-LFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLFP	-	AIC1750-LFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLGG	-	AIC1750-LGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLGP	-	AIC1750-LGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLHG	-	AIC1750-LHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLHP	-	AIC1750-LHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLIG	-	AIC1750-LIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLIP	-	AIC1750-LIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLJG	-	AIC1750-LJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLJP	-	AIC1750-LJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLKG	-	AIC1750-LKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLKP	-	AIC1750-LKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLLG	-	AIC1750-LLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLLP	-	AIC1750-LLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLMG	-	AIC1750-LMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLMP	-	AIC1750-LMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLNG	-	AIC1750-LNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLNP	-	AIC1750-LNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLOG	-	AIC1750-LOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLOP	-	AIC1750-LOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLPG	-	AIC1750-LPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLPP	-	AIC1750-LPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLQG	-	AIC1750-LQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLQP	-	AIC1750-LQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLRG	-	AIC1750-LRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLRP	-	AIC1750-LRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLSG	-	AIC1750-LSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLSP	-	AIC1750-LSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLTG	-	AIC1750-LTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLTP	-	AIC1750-LTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLUG	-	AIC1750-LUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLUP	-	AIC1750-LUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLVG	-	AIC1750-LVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLVP	-	AIC1750-LVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLWG	-	AIC1750-LWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLWP	-	AIC1750-LWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLXG	-	AIC1750-LXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWLXP	-	AIC1750-LXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMAG	-	AIC1750-MAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMAP	-	AIC1750-MAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMBG	-	AIC1750-MBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMBP	-	AIC1750-MBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMCG	-	AIC1750-MCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMCP	-	AIC1750-MCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMDG	-	AIC1750-MDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMDP	-	AIC1750-MDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMEG	-	AIC1750-MEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMEP	-	AIC1750-MEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMFG	-	AIC1750-MFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMFP	-	AIC1750-MFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMGG	-	AIC1750-MGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMGP	-	AIC1750-MGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMHG	-	AIC1750-MHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMHP	-	AIC1750-MHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMIG	-	AIC1750-MIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMIP	-	AIC1750-MIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMJG	-	AIC1750-MJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMJP	-	AIC1750-MJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMKG	-	AIC1750-MKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMKP	-	AIC1750-MKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMLG	-	AIC1750-MLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMLP	-	AIC1750-MLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMMG	-	AIC1750-MMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMMP	-	AIC1750-MMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMNG	-	AIC1750-MNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMNP	-	AIC1750-MNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMOG	-	AIC1750-MOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMOP	-	AIC1750-MOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMPG	-	AIC1750-MPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMPP	-	AIC1750-MPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWMQG	-	AIC1750-MQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMQP	-	AIC1750-MQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMRG	-	AIC1750-MRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMRP	-	AIC1750-MRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMSG	-	AIC1750-MSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMSP	-	AIC1750-MSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMTG	-	AIC1750-MTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMTP	-	AIC1750-MTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMUG	-	AIC1750-MUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMUP	-	AIC1750-MUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMVG	-	AIC1750-MVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMVP	-	AIC1750-MVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMWG	-	AIC1750-MWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMWP	-	AIC1750-MWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMXG	-	AIC1750-MXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWMXP	-	AIC1750-MXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNAG	-	AIC1750-NAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNAP	-	AIC1750-NAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNBG	-	AIC1750-NBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNBP	-	AIC1750-NBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNCG	-	AIC1750-NCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNCP	-	AIC1750-NCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNDG	-	AIC1750-NDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNDP	-	AIC1750-NDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNEG	-	AIC1750-NEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNEP	-	AIC1750-NEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNFG	-	AIC1750-NFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNFP	-	AIC1750-NFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNGG	-	AIC1750-NGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNGP	-	AIC1750-NGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNHG	-	AIC1750-NHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNHP	-	AIC1750-NHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNIG	-	AIC1750-NIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNIP	-	AIC1750-NIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNJG	-	AIC1750-NJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNJP	-	AIC1750-NJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNKG	-	AIC1750-NKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNKP	-	AIC1750-NKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNLG	-	AIC1750-NLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNLP	-	AIC1750-NLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNMG	-	AIC1750-NMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNMP	-	AIC1750-NMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNNG	-	AIC1750-NNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNNP	-	AIC1750-NNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNOG	-	AIC1750-NOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNOP	-	AIC1750-NOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNPG	-	AIC1750-NPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNPP	-	AIC1750-NPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNQG	-	AIC1750-NQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNQP	-	AIC1750-NQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNRG	-	AIC1750-NRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNRP	-	AIC1750-NRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNSG	-	AIC1750-NSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNSP	-	AIC1750-NSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNTG	-	AIC1750-NTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNTP	-	AIC1750-NTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNUG	-	AIC1750-NUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNUP	-	AIC1750-NUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNVG	-	AIC1750-NVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNVP	-	AIC1750-NVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNWG	-	AIC1750-NWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNWP	-	AIC1750-NWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNXG	-	AIC1750-NXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWNXP	-	AIC1750-NXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOAG	-	AIC1750-OAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOAP	-	AIC1750-OAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOBG	-	AIC1750-OBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOBP	-	AIC1750-OBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOCG	-	AIC1750-OCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOCP	-	AIC1750-OCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWODG	-	AIC1750-ODGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWODP	-	AIC1750-ODPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOEG	-	AIC1750-OEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOEP	-	AIC1750-OEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOFG	-	AIC1750-OFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOFP	-	AIC1750-OFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOGG	-	AIC1750-OGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOGP	-	AIC1750-OGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOHG	-	AIC1750-OHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOHP	-	AIC1750-OHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOIG	-	AIC1750-OIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOIP	-	AIC1750-OIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOJG	-	AIC1750-OJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOJP	-	AIC1750-OJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOKG	-	AIC1750-OKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOKP	-	AIC1750-OKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOLG	-	AIC1750-OLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOLP	-	AIC1750-OLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOMG	-	AIC1750-OMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOMP	-	AIC1750-OMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWONG	-	AIC1750-ONGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWONP	-	AIC1750-ONPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOOG	-	AIC1750-OOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOOP	-	AIC1750-OOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOPG	-	AIC1750-OPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOPP	-	AIC1750-OPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOQG	-	AIC1750-OQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOQP	-	AIC1750-OQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWORG	-	AIC1750-ORGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWORP	-	AIC1750-ORPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOSG	-	AIC1750-OSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOSP	-	AIC1750-OSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOTG	-	AIC1750-OTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOTP	-	AIC1750-OTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOUG	-	AIC1750-OUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOUP	-	AIC1750-OUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOVG	-	AIC1750-OVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOVP	-	AIC1750-OVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOWG	-	AIC1750-OWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOWP	-	AIC1750-OWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOXG	-	AIC1750-OXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWOXP	-	AIC1750-OXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPAG	-	AIC1750-PAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPAP	-	AIC1750-PAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPBG	-	AIC1750-PBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPBP	-	AIC1750-PBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPCG	-	AIC1750-PCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPCP	-	AIC1750-PCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPDG	-	AIC1750-PDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPDP	-	AIC1750-PDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPEG	-	AIC1750-PEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPEP	-	AIC1750-PEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPFG	-	AIC1750-PFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPFP	-	AIC1750-PFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPGG	-	AIC1750-PGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPGP	-	AIC1750-PGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPHG	-	AIC1750-PHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPHP	-	AIC1750-PHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPIG	-	AIC1750-PIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPIP	-	AIC1750-PIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPJG	-	AIC1750-PJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPJP	-	AIC1750-PJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPKG	-	AIC1750-PKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPKP	-	AIC1750-PKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPLG	-	AIC1750-PLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPLP	-	AIC1750-PLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPMG	-	AIC1750-PMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPMP	-	AIC1750-PMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPNG	-	AIC1750-PNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPNP	-	AIC1750-PNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWPOG	-	AIC1750-POGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPOP	-	AIC1750-POPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPPG	-	AIC1750-PPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPPP	-	AIC1750-PPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPQG	-	AIC1750-PQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPQP	-	AIC1750-PQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPRG	-	AIC1750-PRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPRP	-	AIC1750-PRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPSG	-	AIC1750-PSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPSP	-	AIC1750-PSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPTG	-	AIC1750-PTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPTP	-	AIC1750-PTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPUG	-	AIC1750-PUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPUP	-	AIC1750-PUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPVG	-	AIC1750-PVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPVP	-	AIC1750-PVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPWG	-	AIC1750-PWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPWP	-	AIC1750-PWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPXG	-	AIC1750-PXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWPXP	-	AIC1750-PXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQAG	-	AIC1750-QAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQAP	-	AIC1750-QAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQBG	-	AIC1750-QBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQBP	-	AIC1750-QBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQCG	-	AIC1750-QCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQCP	-	AIC1750-QCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQDG	-	AIC1750-QDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQDP	-	AIC1750-QDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQEG	-	AIC1750-QEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQEP	-	AIC1750-QEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQFG	-	AIC1750-QFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQFP	-	AIC1750-QFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQGG	-	AIC1750-QGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQGP	-	AIC1750-QGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQHG	-	AIC1750-QHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQHP	-	AIC1750-QHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQIG	-	AIC1750-QIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQIP	-	AIC1750-QIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQJG	-	AIC1750-QJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQJP	-	AIC1750-QJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQKG	-	AIC1750-QKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQKP	-	AIC1750-QKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQLG	-	AIC1750-QLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQLP	-	AIC1750-QLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQMG	-	AIC1750-QMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQMP	-	AIC1750-QMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQNG	-	AIC1750-QNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQNP	-	AIC1750-QNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQOG	-	AIC1750-QOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQOP	-	AIC1750-QOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQPG	-	AIC1750-QPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQPP	-	AIC1750-QPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQQG	-	AIC1750-QQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQQP	-	AIC1750-QQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQRG	-	AIC1750-QRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQRP	-	AIC1750-QRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQSG	-	AIC1750-QSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQSP	-	AIC1750-QSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQTG	-	AIC1750-QTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQTP	-	AIC1750-QTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQUG	-	AIC1750-QUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQUP	-	AIC1750-QUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQVG	-	AIC1750-QVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQVP	-	AIC1750-QVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQWG	-	AIC1750-QWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQWP	-	AIC1750-QWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQXG	-	AIC1750-QXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWQXP	-	AIC1750-QXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRAG	-	AIC1750-RAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRAP	-	AIC1750-RAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWRBG	-	AIC1750-RBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRBP	-	AIC1750-RBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRCG	-	AIC1750-RCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRCP	-	AIC1750-RCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRDG	-	AIC1750-RDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRDP	-	AIC1750-RDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWREG	-	AIC1750-REGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWREP	-	AIC1750-REPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRFG	-	AIC1750-RFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRFP	-	AIC1750-RFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRGG	-	AIC1750-RGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRGP	-	AIC1750-RGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRHG	-	AIC1750-RHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRHP	-	AIC1750-RHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRIG	-	AIC1750-RIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRIP	-	AIC1750-RIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRJG	-	AIC1750-RJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRJP	-	AIC1750-RJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRKG	-	AIC1750-RKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRKP	-	AIC1750-RKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRLG	-	AIC1750-RLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRLP	-	AIC1750-RLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRMG	-	AIC1750-RMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRMP	-	AIC1750-RMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRNG	-	AIC1750-RNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRNP	-	AIC1750-RNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWROG	-	AIC1750-ROGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWROP	-	AIC1750-ROPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRPG	-	AIC1750-RPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRPP	-	AIC1750-RPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRQG	-	AIC1750-RQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRQP	-	AIC1750-RQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRRG	-	AIC1750-RRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRRP	-	AIC1750-RRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRSG	-	AIC1750-RSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRSP	-	AIC1750-RSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRTG	-	AIC1750-RTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRTP	-	AIC1750-RTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRUG	-	AIC1750-RUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRUP	-	AIC1750-RUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRVG	-	AIC1750-RVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRVP	-	AIC1750-RVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRWG	-	AIC1750-RWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRWP	-	AIC1750-RWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRXG	-	AIC1750-RXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWRXP	-	AIC1750-RXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSAG	-	AIC1750-SAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSAP	-	AIC1750-SAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSBG	-	AIC1750-SBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSBP	-	AIC1750-SBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSCG	-	AIC1750-SCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSCP	-	AIC1750-SCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSDG	-	AIC1750-SDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSDP	-	AIC1750-SDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSEG	-	AIC1750-SEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSEP	-	AIC1750-SEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSFG	-	AIC1750-SFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSFP	-	AIC1750-SFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSGG	-	AIC1750-SGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSGP	-	AIC1750-SGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSHG	-	AIC1750-SHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSHP	-	AIC1750-SHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSIG	-	AIC1750-SIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSIP	-	AIC1750-SIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSJG	-	AIC1750-SJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSJP	-	AIC1750-SJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSKG	-	AIC1750-SKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSKP	-	AIC1750-SKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSLG	-	AIC1750-SLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSLP	-	AIC1750-SLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWSMG	-	AIC1750-SMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSMP	-	AIC1750-SMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSNG	-	AIC1750-SNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSNP	-	AIC1750-SNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSOG	-	AIC1750-SOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSOP	-	AIC1750-SOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSPG	-	AIC1750-SPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSPP	-	AIC1750-SPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSQG	-	AIC1750-SQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSQP	-	AIC1750-SQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSRG	-	AIC1750-SRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSRP	-	AIC1750-SRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSSG	-	AIC1750-SSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSSP	-	AIC1750-SSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSTG	-	AIC1750-STGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSTP	-	AIC1750-STPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSUG	-	AIC1750-SUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSUP	-	AIC1750-SUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSVG	-	AIC1750-SVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSVP	-	AIC1750-SVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSWG	-	AIC1750-SWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSWP	-	AIC1750-SWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSXG	-	AIC1750-SXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWSXP	-	AIC1750-SXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTAG	-	AIC1750-TAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTAP	-	AIC1750-TAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTBG	-	AIC1750-TBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTBP	-	AIC1750-TBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTCG	-	AIC1750-TCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTCP	-	AIC1750-TCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTDG	-	AIC1750-TDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTDP	-	AIC1750-TDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTEG	-	AIC1750-TEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTEP	-	AIC1750-TEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTFG	-	AIC1750-TFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTFP	-	AIC1750-TFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTGG	-	AIC1750-TGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTGP	-	AIC1750-TGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTHG	-	AIC1750-THGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTHP	-	AIC1750-THPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTIG	-	AIC1750-TIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTIP	-	AIC1750-TIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTJG	-	AIC1750-TJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTJP	-	AIC1750-TJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTKG	-	AIC1750-TKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTKP	-	AIC1750-TKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTLG	-	AIC1750-TLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTLP	-	AIC1750-TLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTMG	-	AIC1750-TMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTMP	-	AIC1750-TMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTNG	-	AIC1750-TNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTNP	-	AIC1750-TNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTOG	-	AIC1750-TOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTOP	-	AIC1750-TOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTPG	-	AIC1750-TPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTPP	-	AIC1750-TPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTQG	-	AIC1750-TQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTQP	-	AIC1750-TQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTRG	-	AIC1750-TRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTRP	-	AIC1750-TRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTSG	-	AIC1750-TSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTSP	-	AIC1750-TSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTTG	-	AIC1750-TTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTTP	-	AIC1750-TTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTUG	-	AIC1750-TUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTUP	-	AIC1750-TUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTVG	-	AIC1750-TVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTVP	-	AIC1750-TVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTWG	-	AIC1750-TWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTWP	-	AIC1750-TWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWTXG	-	AIC1750-TXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWTXP	-	AIC1750-TXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUAG	-	AIC1750-UAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUAP	-	AIC1750-UAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUBG	-	AIC1750-UBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUBP	-	AIC1750-UBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUCG	-	AIC1750-UCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUCP	-	AIC1750-UCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUDG	-	AIC1750-UDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUDP	-	AIC1750-UDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUEG	-	AIC1750-UEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUEP	-	AIC1750-UEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUFG	-	AIC1750-UFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUFP	-	AIC1750-UFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUGG	-	AIC1750-UGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUGP	-	AIC1750-UGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUHG	-	AIC1750-UHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUHP	-	AIC1750-UHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUIG	-	AIC1750-UIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUIP	-	AIC1750-UIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUJG	-	AIC1750-UJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUJP	-	AIC1750-UJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUKG	-	AIC1750-UKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUKP	-	AIC1750-UKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWULG	-	AIC1750-ULGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWULP	-	AIC1750-ULPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUMG	-	AIC1750-UMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUMP	-	AIC1750-UMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUNG	-	AIC1750-UNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUNP	-	AIC1750-UNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUOG	-	AIC1750-UOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUOP	-	AIC1750-UOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUPG	-	AIC1750-UPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUPP	-	AIC1750-UPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUQG	-	AIC1750-UQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUQP	-	AIC1750-UQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWURG	-	AIC1750-URGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWURP	-	AIC1750-URPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUSG	-	AIC1750-USGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUSP	-	AIC1750-USPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUTG	-	AIC1750-UTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUTP	-	AIC1750-UTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUUG	-	AIC1750-UUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUUP	-	AIC1750-UUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUVG	-	AIC1750-UVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUVP	-	AIC1750-UVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUWG	-	AIC1750-UWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUWP	-	AIC1750-UWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUXG	-	AIC1750-UXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWUXP	-	AIC1750-UXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVAG	-	AIC1750-VAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVAP	-	AIC1750-VAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVBG	-	AIC1750-VBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVBP	-	AIC1750-VBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVCG	-	AIC1750-VCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVCP	-	AIC1750-VCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVDG	-	AIC1750-VDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVDP	-	AIC1750-VDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVEG	-	AIC1750-VEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVEP	-	AIC1750-VEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVFG	-	AIC1750-VFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVFP	-	AIC1750-VFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVGG	-	AIC1750-VGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVGP	-	AIC1750-VGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVHG	-	AIC1750-VHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVHP	-	AIC1750-VHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVIG	-	AIC1750-VIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVIP	-	AIC1750-VIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVJG	-	AIC1750-VJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVJP	-	AIC1750-VJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWVKG	-	AIC1750-VKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVKP	-	AIC1750-VKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVLG	-	AIC1750-VLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVLP	-	AIC1750-VLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVMG	-	AIC1750-VMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVMP	-	AIC1750-VMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVNG	-	AIC1750-VNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVNP	-	AIC1750-VNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVOG	-	AIC1750-VOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVOP	-	AIC1750-VOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVPG	-	AIC1750-VPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVPP	-	AIC1750-VPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVQG	-	AIC1750-VQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVQP	-	AIC1750-VQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVRG	-	AIC1750-VRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVRP	-	AIC1750-VRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVSG	-	AIC1750-VSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVSP	-	AIC1750-VSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVTG	-	AIC1750-VTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVTP	-	AIC1750-VTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVUG	-	AIC1750-VUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVUP	-	AIC1750-VUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVVG	-	AIC1750-VVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVVP	-	AIC1750-VVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVWG	-	AIC1750-VWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVWP	-	AIC1750-VWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVXG	-	AIC1750-VXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWVXP	-	AIC1750-VXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWAG	-	AIC1750-WAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWAP	-	AIC1750-WAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWBG	-	AIC1750-WBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWBP	-	AIC1750-WBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWCG	-	AIC1750-WCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWCP	-	AIC1750-WCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWDG	-	AIC1750-WDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWDP	-	AIC1750-WDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWEG	-	AIC1750-WEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWEP	-	AIC1750-WEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWFG	-	AIC1750-WFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWFP	-	AIC1750-WFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWGG	-	AIC1750-WGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWGP	-	AIC1750-WGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWHG	-	AIC1750-WHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWHP	-	AIC1750-WHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWIG	-	AIC1750-WIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWIP	-	AIC1750-WIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWJG	-	AIC1750-WJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWJP	-	AIC1750-WJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWKG	-	AIC1750-WKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWKP	-	AIC1750-WKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWLG	-	AIC1750-WLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWLP	-	AIC1750-WLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWMG	-	AIC1750-WMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWMP	-	AIC1750-WMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWNG	-	AIC1750-WNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWNP	-	AIC1750-WNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWOG	-	AIC1750-WOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWOP	-	AIC1750-WOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWPG	-	AIC1750-WPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWPP	-	AIC1750-WPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWQG	-	AIC1750-WQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWQP	-	AIC1750-WQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWRG	-	AIC1750-WRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWRP	-	AIC1750-WRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWSG	-	AIC1750-WSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWSP	-	AIC1750-WSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWTG	-	AIC1750-WTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWTP	-	AIC1750-WTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWUG	-	AIC1750-WUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWUP	-	AIC1750-WUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWWVG	-	AIC1750-WVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWVP	-	AIC1750-WVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWWG	-	AIC1750-WWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWWP	-	AIC1750-WWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWXG	-	AIC1750-WXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWWXP	-	AIC1750-WXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXAG	-	AIC1750-XAGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXAP	-	AIC1750-XAPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXBG	-	AIC1750-XBGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXBP	-	AIC1750-XBPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXCG	-	AIC1750-XCGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXCP	-	AIC1750-XCPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXDG	-	AIC1750-XDGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXDP	-	AIC1750-XDPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXEG	-	AIC1750-XEGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXEP	-	AIC1750-XEPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXFG	-	AIC1750-XFGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXFP	-	AIC1750-XFPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXGG	-	AIC1750-XGGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXGP	-	AIC1750-XGPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXHG	-	AIC1750-XHGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXHP	-	AIC1750-XHPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXIG	-	AIC1750-XIGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXIP	-	AIC1750-XIPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXJG	-	AIC1750-XJGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXJP	-	AIC1750-XJPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXKG	-	AIC1750-XKGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXKP	-	AIC1750-XKPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXLG	-	AIC1750-XLGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXLP	-	AIC1750-XLPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXMG	-	AIC1750-XMGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXMP	-	AIC1750-XMPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXNG	-	AIC1750-XNGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXNP	-	AIC1750-XNPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXOG	-	AIC1750-XOGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXOP	-	AIC1750-XOPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXPG	-	AIC1750-XPGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXPP	-	AIC1750-XPPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXQG	-	AIC1750-XQGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXQP	-	AIC1750-XQPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXRG	-	AIC1750-XRGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXRP	-	AIC1750-XRPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXSG	-	AIC1750-XSGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXSP	-	AIC1750-XSPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXTG	-	AIC1750-XTGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXTP	-	AIC1750-XTPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXUG	-	AIC1750-XUGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXUP	-	AIC1750-XUPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXVG	-	AIC1750-XVGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXVP	-	AIC1750-XVPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXWG	-	AIC1750-XWGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXWP	-	AIC1750-XWPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXXG	-	AIC1750-XXGGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BWXXP	-	AIC1750-XXPGL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 150mA, +CE	SOT-23-6	33yf	VR19	7b	Aic
BX	-	R5421N173F	BM-IC	Li-Ion, over-charge/discharge protection, Vd=7.3V	SOT-23-6	xj	VBM1	7da	Ric
BY	-	AAT3221IJS-2.85	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky
BY	-	R5421N151F	BM-IC	Li-Ion, over-charge/discharge protection, Vd=5.1V	SOT-23-6	xj	VBM1	7da	Ric
BYAAG	-	AIC1750-AAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAAP	-	AIC1750-AAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYABG	-	AIC1750-ABGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYABP	-	AIC1750-ABPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYACG	-	AIC1750-ACGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYACP	-	AIC1750-ACPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYADG	-	AIC1750-ADGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYADP	-	AIC1750-ADPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAEG	-	AIC1750-AEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAEP	-	AIC1750-AEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAFG	-	AIC1750-AFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAFP	-	AIC1750-AFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAGG	-	AIC1750-AGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYAGP	-	AIC1750-AGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAHG	-	AIC1750-AHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAHP	-	AIC1750-AHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAIG	-	AIC1750-AIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAIP	-	AIC1750-AIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAJG	-	AIC1750-AJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAJP	-	AIC1750-AJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAKG	-	AIC1750-AKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAKP	-	AIC1750-AKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYALG	-	AIC1750-ALGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYALP	-	AIC1750-ALPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAMG	-	AIC1750-AMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAMP	-	AIC1750-AMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYANG	-	AIC1750-ANGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYANP	-	AIC1750-ANPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAOG	-	AIC1750-AOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAOP	-	AIC1750-AOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAPG	-	AIC1750-APGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAPP	-	AIC1750-APPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAQG	-	AIC1750-AQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAQP	-	AIC1750-AQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYARG	-	AIC1750-ARGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYARP	-	AIC1750-ARPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYASG	-	AIC1750-ASGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYASP	-	AIC1750-ASPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYATG	-	AIC1750-ATGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYATP	-	AIC1750-ATPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAUG	-	AIC1750-AUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAUP	-	AIC1750-AUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAVG	-	AIC1750-AVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAVP	-	AIC1750-AVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAWG	-	AIC1750-AWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAWP	-	AIC1750-AWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAXG	-	AIC1750-AXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYAXP	-	AIC1750-AXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBAG	-	AIC1750-BAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBAP	-	AIC1750-BAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBBG	-	AIC1750-BBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBBP	-	AIC1750-BBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBCG	-	AIC1750-BCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBCP	-	AIC1750-BCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBDG	-	AIC1750-BDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBDP	-	AIC1750-BDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBEG	-	AIC1750-BEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBEP	-	AIC1750-BEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBFG	-	AIC1750-BFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBFP	-	AIC1750-BFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBGG	-	AIC1750-BGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBGP	-	AIC1750-BGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBHG	-	AIC1750-BHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBHP	-	AIC1750-BHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBIG	-	AIC1750-BIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBIP	-	AIC1750-BIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBJG	-	AIC1750-BJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBJP	-	AIC1750-BJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBKG	-	AIC1750-BKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBKP	-	AIC1750-BKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBLG	-	AIC1750-BLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBLP	-	AIC1750-BLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBMG	-	AIC1750-BMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBMP	-	AIC1750-BMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBNG	-	AIC1750-BNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBNP	-	AIC1750-BNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBOG	-	AIC1750-BOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBOP	-	AIC1750-BOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBPG	-	AIC1750-BPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBPP	-	AIC1750-BPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBQG	-	AIC1750-BQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBQP	-	AIC1750-BQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBRG	-	AIC1750-BRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYBRP	-	AIC1750-BRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBSG	-	AIC1750-BSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBSP	-	AIC1750-BSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBTG	-	AIC1750-BTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBTP	-	AIC1750-BTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBUG	-	AIC1750-BUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBUP	-	AIC1750-BUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBVG	-	AIC1750-BVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBVP	-	AIC1750-BVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBWG	-	AIC1750-BWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBWP	-	AIC1750-BWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBXG	-	AIC1750-BXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYBXP	-	AIC1750-BXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCAG	-	AIC1750-CAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCAP	-	AIC1750-CAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCBG	-	AIC1750-CBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCBP	-	AIC1750-CBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCCG	-	AIC1750-CCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCCP	-	AIC1750-CCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCDG	-	AIC1750-CDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCDP	-	AIC1750-CDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCEG	-	AIC1750-CEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCEP	-	AIC1750-CEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCFG	-	AIC1750-CFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCFP	-	AIC1750-CFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCGG	-	AIC1750-CGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCGP	-	AIC1750-CGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCHG	-	AIC1750-CHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCHP	-	AIC1750-CHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCIG	-	AIC1750-CIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCIP	-	AIC1750-CIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCJG	-	AIC1750-CJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCJP	-	AIC1750-CJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCKG	-	AIC1750-CKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCKP	-	AIC1750-CKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCLG	-	AIC1750-CLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCLP	-	AIC1750-CLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCMG	-	AIC1750-CMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCMP	-	AIC1750-CMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCNG	-	AIC1750-CNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCNP	-	AIC1750-CNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCOG	-	AIC1750-COGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCOP	-	AIC1750-COPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCPG	-	AIC1750-CPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCPP	-	AIC1750-CPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCQG	-	AIC1750-CQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCQP	-	AIC1750-CQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCRG	-	AIC1750-CRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCRP	-	AIC1750-CRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCSG	-	AIC1750-CSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCSP	-	AIC1750-CSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCTG	-	AIC1750-CYGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCTP	-	AIC1750-CYPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCUG	-	AIC1750-CUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCUP	-	AIC1750-CUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCVG	-	AIC1750-CVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCVP	-	AIC1750-CVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCWG	-	AIC1750-CWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCWP	-	AIC1750-CWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCXG	-	AIC1750-CXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYCXP	-	AIC1750-CXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDAG	-	AIC1750-DAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDAP	-	AIC1750-DAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDBG	-	AIC1750-DBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDBP	-	AIC1750-DBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDCG	-	AIC1750-DCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDCP	-	AIC1750-DCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDDG	-	AIC1750-DDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDDP	-	AIC1750-DDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDEG	-	AIC1750-DEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYDEP	-	AIC1750-DEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDFG	-	AIC1750-DFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDFP	-	AIC1750-DFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDGG	-	AIC1750-DGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDGP	-	AIC1750-DGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDHG	-	AIC1750-DHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDHP	-	AIC1750-DHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDIG	-	AIC1750-DIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDIP	-	AIC1750-DIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDJG	-	AIC1750-DJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDJP	-	AIC1750-DJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDKG	-	AIC1750-DKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDKP	-	AIC1750-DKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDLG	-	AIC1750-DLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDLP	-	AIC1750-DLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDMG	-	AIC1750-DMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDMP	-	AIC1750-DMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDNG	-	AIC1750-DNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDNP	-	AIC1750-DNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDOG	-	AIC1750-DOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDOP	-	AIC1750-DOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDPG	-	AIC1750-DPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDPP	-	AIC1750-DPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDQG	-	AIC1750-DQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDQP	-	AIC1750-DQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDRG	-	AIC1750-DRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDRP	-	AIC1750-DRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDSG	-	AIC1750-DSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDSP	-	AIC1750-DSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDTG	-	AIC1750-DTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDTP	-	AIC1750-DTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDUG	-	AIC1750-DUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDUP	-	AIC1750-DUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDVG	-	AIC1750-DVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDVP	-	AIC1750-DVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDWG	-	AIC1750-DWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDWP	-	AIC1750-DWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDXG	-	AIC1750-DXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYDXP	-	AIC1750-DXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEAG	-	AIC1750-EAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEAP	-	AIC1750-EAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEBG	-	AIC1750-EBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEBP	-	AIC1750-EBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYECG	-	AIC1750-ECGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYECP	-	AIC1750-ECPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEDG	-	AIC1750-EDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEDP	-	AIC1750-EDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEEG	-	AIC1750-EEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEEP	-	AIC1750-EEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEFG	-	AIC1750-EFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEFP	-	AIC1750-EFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEGG	-	AIC1750-EGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEGP	-	AIC1750-EGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEHG	-	AIC1750-EHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEHP	-	AIC1750-EHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEIG	-	AIC1750-EIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEIP	-	AIC1750-EIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEJG	-	AIC1750-EJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEJP	-	AIC1750-EJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEKG	-	AIC1750-EKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEKP	-	AIC1750-EKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYELG	-	AIC1750-ELGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYELP	-	AIC1750-ELPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEMG	-	AIC1750-EMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEMP	-	AIC1750-EMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYENG	-	AIC1750-ENGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYENP	-	AIC1750-ENPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEOG	-	AIC1750-EOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEOP	-	AIC1750-EOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEPG	-	AIC1750-EPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYEPP	-	AIC1750-EPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEQG	-	AIC1750-EQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEQP	-	AIC1750-EQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYERG	-	AIC1750-ERGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYERP	-	AIC1750-ERPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYESG	-	AIC1750-ESGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYESP	-	AIC1750-ESPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYETG	-	AIC1750-ETGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYETP	-	AIC1750-ETPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEUG	-	AIC1750-EUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEUP	-	AIC1750-EUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEVG	-	AIC1750-EVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEVP	-	AIC1750-EVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEWG	-	AIC1750-EWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEWP	-	AIC1750-EWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEXG	-	AIC1750-EXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYEXP	-	AIC1750-EXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFAG	-	AIC1750-FAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFAP	-	AIC1750-FAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFBG	-	AIC1750-FBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFBP	-	AIC1750-FBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFCG	-	AIC1750-FCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFCP	-	AIC1750-FCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFDG	-	AIC1750-FDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFDP	-	AIC1750-FDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFEG	-	AIC1750-FEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFEP	-	AIC1750-FEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFFG	-	AIC1750-FFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFFP	-	AIC1750-FFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFGG	-	AIC1750-FGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFGP	-	AIC1750-FGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFHG	-	AIC1750-FHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFHP	-	AIC1750-FHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFIG	-	AIC1750-FIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFIP	-	AIC1750-FIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFJG	-	AIC1750-FJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFJP	-	AIC1750-FJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFKG	-	AIC1750-FKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFKP	-	AIC1750-FKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFLG	-	AIC1750-FLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFLP	-	AIC1750-FLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFMG	-	AIC1750-FMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFMP	-	AIC1750-FMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFNG	-	AIC1750-FNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFNP	-	AIC1750-FNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFOG	-	AIC1750-FOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFOP	-	AIC1750-FOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFPG	-	AIC1750-FPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFPP	-	AIC1750-FPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFQG	-	AIC1750-FQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFQP	-	AIC1750-FQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFRG	-	AIC1750-FRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFRP	-	AIC1750-FRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFSG	-	AIC1750-FSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFSP	-	AIC1750-FSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFTG	-	AIC1750-FTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFTP	-	AIC1750-FTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFUG	-	AIC1750-FUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFUP	-	AIC1750-FUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFVG	-	AIC1750-FVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFVP	-	AIC1750-FVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFWG	-	AIC1750-FWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFWP	-	AIC1750-FWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFXG	-	AIC1750-FXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYFXP	-	AIC1750-FXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGAG	-	AIC1750-GAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGAP	-	AIC1750-GAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGBG	-	AIC1750-GBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGBP	-	AIC1750-GBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGCG	-	AIC1750-GCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYGCP	-	AIC1750-GCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGDG	-	AIC1750-GDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGDP	-	AIC1750-GDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGEG	-	AIC1750-GEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGEP	-	AIC1750-GEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGFG	-	AIC1750-GFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGFP	-	AIC1750-GFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGGG	-	AIC1750-GGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGGP	-	AIC1750-GGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGHG	-	AIC1750-GHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGHP	-	AIC1750-GHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGIG	-	AIC1750-GIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGIP	-	AIC1750-GIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGJG	-	AIC1750-GJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGJP	-	AIC1750-GJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGKG	-	AIC1750-GKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGKP	-	AIC1750-GKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGLG	-	AIC1750-GLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGLP	-	AIC1750-GLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGMG	-	AIC1750-GMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGMP	-	AIC1750-GMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGNG	-	AIC1750-GNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGNP	-	AIC1750-GNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGOG	-	AIC1750-GOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGOP	-	AIC1750-GOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGPG	-	AIC1750-GPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGPP	-	AIC1750-GPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGQG	-	AIC1750-GQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGQP	-	AIC1750-GQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGRG	-	AIC1750-GRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGRP	-	AIC1750-GRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGSG	-	AIC1750-GSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGSP	-	AIC1750-GSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGTG	-	AIC1750-GTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGTP	-	AIC1750-GTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGUG	-	AIC1750-GUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGUP	-	AIC1750-GUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGVG	-	AIC1750-GVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGVP	-	AIC1750-GVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGWG	-	AIC1750-GWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGWP	-	AIC1750-GWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGXG	-	AIC1750-GXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYGXP	-	AIC1750-GXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHAG	-	AIC1750-HAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHAP	-	AIC1750-HAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHBG	-	AIC1750-HBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHBP	-	AIC1750-HBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHCG	-	AIC1750-HCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHCP	-	AIC1750-HCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHDG	-	AIC1750-HDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHDP	-	AIC1750-HDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHEG	-	AIC1750-HEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHEP	-	AIC1750-HEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHFG	-	AIC1750-HFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHFP	-	AIC1750-HFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHGG	-	AIC1750-HGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHGP	-	AIC1750-HGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHHG	-	AIC1750-HHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHHP	-	AIC1750-HHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHIG	-	AIC1750-HIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHIP	-	AIC1750-HIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHJG	-	AIC1750-HJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHJP	-	AIC1750-HJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHKG	-	AIC1750-HKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHKP	-	AIC1750-HKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHLG	-	AIC1750-HLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHLP	-	AIC1750-HLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHMG	-	AIC1750-HMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHMP	-	AIC1750-HMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHNG	-	AIC1750-HNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYHNP	-	AIC1750-HNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHOG	-	AIC1750-HOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHOP	-	AIC1750-HOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHPG	-	AIC1750-HPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHPP	-	AIC1750-HPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHQG	-	AIC1750-HQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHQP	-	AIC1750-HQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHRG	-	AIC1750-HRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHRP	-	AIC1750-HRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHSG	-	AIC1750-HSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHSP	-	AIC1750-HSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHTG	-	AIC1750-HTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHTP	-	AIC1750-HTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHUG	-	AIC1750-HUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHUP	-	AIC1750-HUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHVG	-	AIC1750-HVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHVP	-	AIC1750-HVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHWG	-	AIC1750-HWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHWP	-	AIC1750-HWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHXG	-	AIC1750-HXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYHXP	-	AIC1750-HXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIAG	-	AIC1750-IAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIAP	-	AIC1750-IAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIBG	-	AIC1750-IBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIBP	-	AIC1750-IBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYICG	-	AIC1750-ICGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYICP	-	AIC1750-ICPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIDG	-	AIC1750-IDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIDP	-	AIC1750-IDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIEG	-	AIC1750-IEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIEP	-	AIC1750-IEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIFG	-	AIC1750-IFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIFP	-	AIC1750-IFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIGG	-	AIC1750-IGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIGP	-	AIC1750-IGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIHG	-	AIC1750-IHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIHP	-	AIC1750-IHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIIG	-	AIC1750-IIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIIP	-	AIC1750-IIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIJG	-	AIC1750-IJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIJP	-	AIC1750-IJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIKG	-	AIC1750-IKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIKP	-	AIC1750-IKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYILG	-	AIC1750-ILGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYILP	-	AIC1750-ILPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIMG	-	AIC1750-IMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIMP	-	AIC1750-IMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYING	-	AIC1750-INGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYINP	-	AIC1750-INPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIOG	-	AIC1750-IOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIOP	-	AIC1750-IOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIPG	-	AIC1750-IPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIPP	-	AIC1750-IPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIQG	-	AIC1750-IQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIQP	-	AIC1750-IQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIRG	-	AIC1750-IRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIRP	-	AIC1750-IRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYISG	-	AIC1750-ISGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYISP	-	AIC1750-ISPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYITG	-	AIC1750-ITGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYITP	-	AIC1750-ITPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIUG	-	AIC1750-IUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIUP	-	AIC1750-IUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIVG	-	AIC1750-IVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIVP	-	AIC1750-IVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIWG	-	AIC1750-IWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIWP	-	AIC1750-IWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIXG	-	AIC1750-IXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYIXP	-	AIC1750-IXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJAG	-	AIC1750-JAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYJAP	-	AIC1750-JAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJBG	-	AIC1750-JBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJBP	-	AIC1750-JBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJCG	-	AIC1750-JCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJCP	-	AIC1750-JCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJDG	-	AIC1750-JDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJDP	-	AIC1750-JDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJEG	-	AIC1750-JEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJEP	-	AIC1750-JEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJFG	-	AIC1750-JFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJFP	-	AIC1750-JFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJGG	-	AIC1750-JGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJGP	-	AIC1750-JGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJHG	-	AIC1750-JHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJHP	-	AIC1750-JHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJIG	-	AIC1750-JIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJIP	-	AIC1750-JIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJJG	-	AIC1750-JJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJJP	-	AIC1750-JJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJKG	-	AIC1750-JKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJKP	-	AIC1750-JKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJLG	-	AIC1750-JLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJLP	-	AIC1750-JLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJMG	-	AIC1750-JMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJMP	-	AIC1750-JMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJNG	-	AIC1750-JNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJNP	-	AIC1750-JNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJOG	-	AIC1750-JOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJOP	-	AIC1750-JOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJPG	-	AIC1750-JPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJPP	-	AIC1750-JPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJQG	-	AIC1750-JQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJQP	-	AIC1750-JQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJRG	-	AIC1750-JRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJRP	-	AIC1750-JRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJSG	-	AIC1750-JSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJSP	-	AIC1750-JSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJTG	-	AIC1750-JTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJTP	-	AIC1750-JTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJUG	-	AIC1750-JUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJUP	-	AIC1750-JUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJVG	-	AIC1750-JVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJVP	-	AIC1750-JVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJWG	-	AIC1750-JWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJWP	-	AIC1750-JWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJXG	-	AIC1750-JXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYJXP	-	AIC1750-JXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKAG	-	AIC1750-KAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKAP	-	AIC1750-KAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKBG	-	AIC1750-KBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKBP	-	AIC1750-KBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKCG	-	AIC1750-KCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKCP	-	AIC1750-KCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKDG	-	AIC1750-KDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKDP	-	AIC1750-KDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKEG	-	AIC1750-KEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKEP	-	AIC1750-KEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKFG	-	AIC1750-KFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKFP	-	AIC1750-KFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKGG	-	AIC1750-KGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKGP	-	AIC1750-KGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKHG	-	AIC1750-KHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKHP	-	AIC1750-KHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKIG	-	AIC1750-KIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKIP	-	AIC1750-KIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKJG	-	AIC1750-KJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKJP	-	AIC1750-KJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKKG	-	AIC1750-KKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKKP	-	AIC1750-KKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKLG	-	AIC1750-KLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYKLP	-	AIC1750-KLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKMG	-	AIC1750-KMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKMP	-	AIC1750-KMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKNG	-	AIC1750-KNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKNP	-	AIC1750-KNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKOG	-	AIC1750-KOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKOP	-	AIC1750-KOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKPG	-	AIC1750-KPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKPP	-	AIC1750-KPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKQG	-	AIC1750-KQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKQP	-	AIC1750-KQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKRG	-	AIC1750-KRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKRP	-	AIC1750-KRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKSG	-	AIC1750-KSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKSP	-	AIC1750-KSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKTG	-	AIC1750-KTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKTP	-	AIC1750-KTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKUG	-	AIC1750-KUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKUP	-	AIC1750-KUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKVG	-	AIC1750-KVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKVP	-	AIC1750-KVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKWG	-	AIC1750-KWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKWP	-	AIC1750-KWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKXG	-	AIC1750-KXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYKXP	-	AIC1750-KXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLAG	-	AIC1750-LAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLAP	-	AIC1750-LAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLBG	-	AIC1750-LBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLBP	-	AIC1750-LBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLCG	-	AIC1750-LCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLCP	-	AIC1750-LCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLDG	-	AIC1750-LDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLDP	-	AIC1750-LDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLEG	-	AIC1750-LEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLEP	-	AIC1750-LEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLFG	-	AIC1750-LFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLFP	-	AIC1750-LFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLGG	-	AIC1750-LGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLGP	-	AIC1750-LGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLHG	-	AIC1750-LHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLHP	-	AIC1750-LHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLIG	-	AIC1750-LIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLIP	-	AIC1750-LIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLJG	-	AIC1750-LJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLJP	-	AIC1750-LJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLKG	-	AIC1750-LKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLKP	-	AIC1750-LKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLLG	-	AIC1750-LLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLLP	-	AIC1750-LLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLMG	-	AIC1750-LMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLMP	-	AIC1750-LMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLNG	-	AIC1750-LNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLNP	-	AIC1750-LNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLOG	-	AIC1750-LOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLOP	-	AIC1750-LOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLPG	-	AIC1750-LPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLPP	-	AIC1750-LPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLQG	-	AIC1750-LQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLQP	-	AIC1750-LQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLRG	-	AIC1750-LRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLRP	-	AIC1750-LRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLSG	-	AIC1750-LSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLSP	-	AIC1750-LSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLTG	-	AIC1750-LTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLTP	-	AIC1750-LTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLUG	-	AIC1750-LUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLUP	-	AIC1750-LUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLVG	-	AIC1750-LVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLVP	-	AIC1750-LVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLWG	-	AIC1750-LWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYLWP	-	AIC1750-LWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLXG	-	AIC1750-LXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYLXP	-	AIC1750-LXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMAG	-	AIC1750-MAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMAP	-	AIC1750-MAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMBG	-	AIC1750-MBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMBP	-	AIC1750-MBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMCG	-	AIC1750-MCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMCP	-	AIC1750-MCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMDG	-	AIC1750-MDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMDP	-	AIC1750-MDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMEG	-	AIC1750-MEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMEP	-	AIC1750-MEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMFG	-	AIC1750-MFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMFP	-	AIC1750-MFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMGG	-	AIC1750-MGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMGP	-	AIC1750-MGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMHG	-	AIC1750-MHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMHP	-	AIC1750-MHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMIG	-	AIC1750-MIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMIP	-	AIC1750-MIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMJG	-	AIC1750-MJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMJP	-	AIC1750-MJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMKG	-	AIC1750-MKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMKP	-	AIC1750-MKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMLG	-	AIC1750-MLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMLP	-	AIC1750-MLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMMG	-	AIC1750-MMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMMP	-	AIC1750-MMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMNG	-	AIC1750-MNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMNP	-	AIC1750-MNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMOG	-	AIC1750-MOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMOP	-	AIC1750-MOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMPG	-	AIC1750-MPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMPP	-	AIC1750-MPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMQG	-	AIC1750-MQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMQP	-	AIC1750-MQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMRG	-	AIC1750-MRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMRP	-	AIC1750-MRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMSG	-	AIC1750-MSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMSP	-	AIC1750-MSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMTG	-	AIC1750-MTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMTP	-	AIC1750-MTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMUG	-	AIC1750-MUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMUP	-	AIC1750-MUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMVG	-	AIC1750-MVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMVP	-	AIC1750-MVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMWG	-	AIC1750-MWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMWP	-	AIC1750-MWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMXG	-	AIC1750-MXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYMXP	-	AIC1750-MXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNAG	-	AIC1750-NAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNAP	-	AIC1750-NAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNBG	-	AIC1750-NBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNBP	-	AIC1750-NBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNCG	-	AIC1750-NCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNCP	-	AIC1750-NCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNDG	-	AIC1750-NDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNDP	-	AIC1750-NDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNEG	-	AIC1750-NEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNEP	-	AIC1750-NEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNFG	-	AIC1750-NFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNFP	-	AIC1750-NFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNGG	-	AIC1750-NGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNGP	-	AIC1750-NGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNHG	-	AIC1750-NHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNHP	-	AIC1750-NHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNIG	-	AIC1750-NIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNIP	-	AIC1750-NIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNJG	-	AIC1750-NJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYNJP	-	AIC1750-NJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNKG	-	AIC1750-NKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNKP	-	AIC1750-NKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNLG	-	AIC1750-NLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNLP	-	AIC1750-NLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNMG	-	AIC1750-NMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNMP	-	AIC1750-NMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNNG	-	AIC1750-NNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNNP	-	AIC1750-NNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNOG	-	AIC1750-NOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNOP	-	AIC1750-NOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNPG	-	AIC1750-NPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNPP	-	AIC1750-NPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNQG	-	AIC1750-NQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNQP	-	AIC1750-NQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNRG	-	AIC1750-NRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNRP	-	AIC1750-NRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNSG	-	AIC1750-NSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNSP	-	AIC1750-NSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNTG	-	AIC1750-NTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNTP	-	AIC1750-NTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNUG	-	AIC1750-NUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNUP	-	AIC1750-NUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNVG	-	AIC1750-NVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNVP	-	AIC1750-NVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNWG	-	AIC1750-NWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNWP	-	AIC1750-NWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNXG	-	AIC1750-NXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYNXP	-	AIC1750-NXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOAG	-	AIC1750-OAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOAP	-	AIC1750-OAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOBG	-	AIC1750-OBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOBP	-	AIC1750-OBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOCG	-	AIC1750-OCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOCP	-	AIC1750-OCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYODG	-	AIC1750-ODGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYODP	-	AIC1750-ODPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOEG	-	AIC1750-OEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOEP	-	AIC1750-OEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOFG	-	AIC1750-OFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOFP	-	AIC1750-OFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOGG	-	AIC1750-OGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOGP	-	AIC1750-OGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOHG	-	AIC1750-OHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOHP	-	AIC1750-OHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOIG	-	AIC1750-OIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOIP	-	AIC1750-OIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOJG	-	AIC1750-OJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOJP	-	AIC1750-OJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOKG	-	AIC1750-OKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOKP	-	AIC1750-OKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOLG	-	AIC1750-OLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOLP	-	AIC1750-OLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOMG	-	AIC1750-OMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOMP	-	AIC1750-OMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYONG	-	AIC1750-ONGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYONP	-	AIC1750-ONPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOOG	-	AIC1750-OOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOOP	-	AIC1750-OOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOPG	-	AIC1750-OPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOPP	-	AIC1750-OPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOQG	-	AIC1750-OQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOQP	-	AIC1750-OQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYORG	-	AIC1750-ORGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYORP	-	AIC1750-ORPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOSG	-	AIC1750-OSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOSP	-	AIC1750-OSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOTG	-	AIC1750-OTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOTP	-	AIC1750-OTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOUG	-	AIC1750-OUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYOUP	-	AIC1750-OUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOVG	-	AIC1750-OVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOVP	-	AIC1750-OVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOWG	-	AIC1750-OWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOWP	-	AIC1750-OWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOXG	-	AIC1750-OXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYOXP	-	AIC1750-OXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPAG	-	AIC1750-PAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPAP	-	AIC1750-PAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPBG	-	AIC1750-PBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPBP	-	AIC1750-PBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPCG	-	AIC1750-PCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPCP	-	AIC1750-PCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPDG	-	AIC1750-PDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPDP	-	AIC1750-PDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPEG	-	AIC1750-PEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPEP	-	AIC1750-PEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPFG	-	AIC1750-PFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPFP	-	AIC1750-PFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPGG	-	AIC1750-PGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPGP	-	AIC1750-PGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPHG	-	AIC1750-PHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPHP	-	AIC1750-PHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPIG	-	AIC1750-PIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPIP	-	AIC1750-PIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPJG	-	AIC1750-PJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPJP	-	AIC1750-PJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPKG	-	AIC1750-PKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPKP	-	AIC1750-PKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPLG	-	AIC1750-PLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPLP	-	AIC1750-PLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPMG	-	AIC1750-PMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPMP	-	AIC1750-PMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPNG	-	AIC1750-PNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPNP	-	AIC1750-PNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPOG	-	AIC1750-POGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPOP	-	AIC1750-POPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPPG	-	AIC1750-PPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPPP	-	AIC1750-PPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPQG	-	AIC1750-PQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPQP	-	AIC1750-PQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPRG	-	AIC1750-PRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPRP	-	AIC1750-PRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPSG	-	AIC1750-PSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPSP	-	AIC1750-PSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPTG	-	AIC1750-PTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPTP	-	AIC1750-PTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPUG	-	AIC1750-PUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPUP	-	AIC1750-PUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPVG	-	AIC1750-PVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPVP	-	AIC1750-PVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPWG	-	AIC1750-PWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPWP	-	AIC1750-PWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPXG	-	AIC1750-PXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYPXP	-	AIC1750-PXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQAG	-	AIC1750-QAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQAP	-	AIC1750-QAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQBG	-	AIC1750-QBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQBP	-	AIC1750-QBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQCG	-	AIC1750-QCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQCP	-	AIC1750-QCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQDG	-	AIC1750-QDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQDP	-	AIC1750-QDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQEG	-	AIC1750-QEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQEP	-	AIC1750-QEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQFG	-	AIC1750-QFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQFP	-	AIC1750-QFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQGG	-	AIC1750-QGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQGP	-	AIC1750-QGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQHG	-	AIC1750-QHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYQHP	-	AIC1750-QHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQIG	-	AIC1750-QIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQIP	-	AIC1750-QIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQJG	-	AIC1750-QJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQJP	-	AIC1750-QJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQKG	-	AIC1750-QKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQKP	-	AIC1750-QKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQLG	-	AIC1750-QLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQLP	-	AIC1750-QLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQMG	-	AIC1750-QMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQMP	-	AIC1750-QMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQNG	-	AIC1750-QNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQNP	-	AIC1750-QNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQOG	-	AIC1750-QOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQOP	-	AIC1750-QOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQPG	-	AIC1750-QPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQPP	-	AIC1750-QPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQQG	-	AIC1750-QQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQQP	-	AIC1750-QQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQRG	-	AIC1750-QRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQRP	-	AIC1750-QRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQSG	-	AIC1750-QSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQSP	-	AIC1750-QSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQTG	-	AIC1750-QTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQTP	-	AIC1750-QTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQUG	-	AIC1750-QUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQUP	-	AIC1750-QUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQVG	-	AIC1750-QVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQVP	-	AIC1750-QVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQWG	-	AIC1750-QWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQWP	-	AIC1750-QWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQXG	-	AIC1750-QXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYQXP	-	AIC1750-QXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRAG	-	AIC1750-RAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRAP	-	AIC1750-RAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRBG	-	AIC1750-RBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRBP	-	AIC1750-RBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRCG	-	AIC1750-RCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRCP	-	AIC1750-RCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRDG	-	AIC1750-RDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRDP	-	AIC1750-RDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYREG	-	AIC1750-REGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYREP	-	AIC1750-REPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRFG	-	AIC1750-RFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRFP	-	AIC1750-RFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRGG	-	AIC1750-RGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRGP	-	AIC1750-RGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRHG	-	AIC1750-RHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRHP	-	AIC1750-RHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRIG	-	AIC1750-RIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRIP	-	AIC1750-RIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRJG	-	AIC1750-RJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRJP	-	AIC1750-RJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRKG	-	AIC1750-RKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRKP	-	AIC1750-RKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRLG	-	AIC1750-RLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRLP	-	AIC1750-RLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRMG	-	AIC1750-RMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRMP	-	AIC1750-RMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRNG	-	AIC1750-RNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRNP	-	AIC1750-RNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYROG	-	AIC1750-ROGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYROP	-	AIC1750-ROPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRPG	-	AIC1750-RPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRPP	-	AIC1750-RPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRQG	-	AIC1750-RQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRQP	-	AIC1750-RQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRRG	-	AIC1750-RRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRRP	-	AIC1750-RRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRSG	-	AIC1750-RSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYRSP	-	AIC1750-RSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRTG	-	AIC1750-RTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRTP	-	AIC1750-RTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRUG	-	AIC1750-RUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRUP	-	AIC1750-RUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRVG	-	AIC1750-RVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRVP	-	AIC1750-RVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRWG	-	AIC1750-RWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRWP	-	AIC1750-RWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRXG	-	AIC1750-RXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYRXP	-	AIC1750-RXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSAG	-	AIC1750-SAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSAP	-	AIC1750-SAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSBG	-	AIC1750-SBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSBP	-	AIC1750-SBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSCG	-	AIC1750-SCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSCP	-	AIC1750-SCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSDG	-	AIC1750-SDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSDP	-	AIC1750-SDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSEG	-	AIC1750-SEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSEP	-	AIC1750-SEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSFG	-	AIC1750-SFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSFP	-	AIC1750-SFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSGG	-	AIC1750-SGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSGP	-	AIC1750-SGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSHG	-	AIC1750-SHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSHP	-	AIC1750-SHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSIG	-	AIC1750-SIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSIP	-	AIC1750-SIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSJG	-	AIC1750-SJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSJP	-	AIC1750-SJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSKG	-	AIC1750-SKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSKP	-	AIC1750-SKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSLG	-	AIC1750-SLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSLP	-	AIC1750-SLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSMG	-	AIC1750-SMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSMP	-	AIC1750-SMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSNG	-	AIC1750-SNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSNP	-	AIC1750-SNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSOG	-	AIC1750-SOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSOP	-	AIC1750-SOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSPG	-	AIC1750-SPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSPP	-	AIC1750-SPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSQG	-	AIC1750-SQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSQP	-	AIC1750-SQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSRG	-	AIC1750-SRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSRP	-	AIC1750-SRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSSG	-	AIC1750-SSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSSP	-	AIC1750-SSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSTG	-	AIC1750-STGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSTP	-	AIC1750-STPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSUG	-	AIC1750-SUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSUP	-	AIC1750-SUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSVG	-	AIC1750-SVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSVP	-	AIC1750-SVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSWG	-	AIC1750-SWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSWP	-	AIC1750-SWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSXG	-	AIC1750-SXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYSXP	-	AIC1750-SXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTAG	-	AIC1750-TAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTAP	-	AIC1750-TAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTBG	-	AIC1750-TBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTBP	-	AIC1750-TBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTCG	-	AIC1750-TCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTCP	-	AIC1750-TCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTDG	-	AIC1750-TDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTDP	-	AIC1750-TDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTEG	-	AIC1750-TEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTEP	-	AIC1750-TEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTFG	-	AIC1750-TFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYTFP	-	AIC1750-TFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTGG	-	AIC1750-TGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTGP	-	AIC1750-TGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTHG	-	AIC1750-THGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTHP	-	AIC1750-THPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTIG	-	AIC1750-TIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTIP	-	AIC1750-TIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTJG	-	AIC1750-TJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTJP	-	AIC1750-TJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTKG	-	AIC1750-TKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTKP	-	AIC1750-TKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTLG	-	AIC1750-TLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTLP	-	AIC1750-TLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTMG	-	AIC1750-TMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTMP	-	AIC1750-TMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTNG	-	AIC1750-TNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTNP	-	AIC1750-TNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTOG	-	AIC1750-TOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTOP	-	AIC1750-TOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTPG	-	AIC1750-TPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTPP	-	AIC1750-TPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTQG	-	AIC1750-TQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTQP	-	AIC1750-TQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTRG	-	AIC1750-TRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTRP	-	AIC1750-TRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTSG	-	AIC1750-TSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTSP	-	AIC1750-TSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTTG	-	AIC1750-TTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTTP	-	AIC1750-TTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTUG	-	AIC1750-TUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTUP	-	AIC1750-TUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTVG	-	AIC1750-TVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTVP	-	AIC1750-TVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTWG	-	AIC1750-TWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTWP	-	AIC1750-TWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTXG	-	AIC1750-TXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYTXP	-	AIC1750-TXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUAG	-	AIC1750-UAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUAP	-	AIC1750-UAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUBG	-	AIC1750-UBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUBP	-	AIC1750-UBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUCG	-	AIC1750-UCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUCP	-	AIC1750-UCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUDG	-	AIC1750-UDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUDP	-	AIC1750-UDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUEG	-	AIC1750-UEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUEP	-	AIC1750-UEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUFG	-	AIC1750-UFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUFP	-	AIC1750-UFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUGG	-	AIC1750-UGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUGP	-	AIC1750-UGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUHG	-	AIC1750-UHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUHP	-	AIC1750-UHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUIG	-	AIC1750-UIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUIP	-	AIC1750-UIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUJG	-	AIC1750-UJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUJP	-	AIC1750-UJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUKG	-	AIC1750-UKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUKP	-	AIC1750-UKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYULG	-	AIC1750-ULGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYULP	-	AIC1750-ULPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUMG	-	AIC1750-UMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUMP	-	AIC1750-UMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUNG	-	AIC1750-UNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUNP	-	AIC1750-UNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUOG	-	AIC1750-UOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUOP	-	AIC1750-UOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUPG	-	AIC1750-UPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUPP	-	AIC1750-UPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUQG	-	AIC1750-UQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYUQP	-	AIC1750-UQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYURG	-	AIC1750-URGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYURP	-	AIC1750-URPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUSG	-	AIC1750-USGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUSP	-	AIC1750-USPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUTG	-	AIC1750-UTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUTP	-	AIC1750-UTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUUG	-	AIC1750-UUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUUP	-	AIC1750-UUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUVG	-	AIC1750-UVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUVP	-	AIC1750-UVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUWG	-	AIC1750-UWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUWP	-	AIC1750-UWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUXG	-	AIC1750-UXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYUXP	-	AIC1750-UXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVAG	-	AIC1750-VAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVAP	-	AIC1750-VAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVBG	-	AIC1750-VBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVBP	-	AIC1750-VBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVCG	-	AIC1750-VCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVCP	-	AIC1750-VCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVDG	-	AIC1750-VDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVDP	-	AIC1750-VDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVEG	-	AIC1750-VEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVEP	-	AIC1750-VEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVFG	-	AIC1750-VFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVFP	-	AIC1750-VFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVGG	-	AIC1750-VGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVGP	-	AIC1750-VGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVHG	-	AIC1750-VHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVHP	-	AIC1750-VHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVIG	-	AIC1750-VIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVIP	-	AIC1750-VIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVJG	-	AIC1750-VJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVJP	-	AIC1750-VJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVKG	-	AIC1750-VKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVKP	-	AIC1750-VKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVLG	-	AIC1750-VLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVLP	-	AIC1750-VLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVMG	-	AIC1750-VMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVMP	-	AIC1750-VMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVNG	-	AIC1750-VNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVNP	-	AIC1750-VNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVOG	-	AIC1750-VOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVOP	-	AIC1750-VOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVPG	-	AIC1750-VPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVPP	-	AIC1750-VPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVQG	-	AIC1750-VQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVQP	-	AIC1750-VQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVRG	-	AIC1750-VRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVRP	-	AIC1750-VRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVSG	-	AIC1750-VSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVSP	-	AIC1750-VSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVTG	-	AIC1750-VTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVTP	-	AIC1750-VTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVUG	-	AIC1750-VUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVUP	-	AIC1750-VUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVVG	-	AIC1750-VVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVVP	-	AIC1750-VVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVWG	-	AIC1750-VWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVWP	-	AIC1750-VWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVXG	-	AIC1750-VXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYVXP	-	AIC1750-VXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWAG	-	AIC1750-WAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWAP	-	AIC1750-WAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWBG	-	AIC1750-WBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWBP	-	AIC1750-WBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWCG	-	AIC1750-WCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWCP	-	AIC1750-WCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWDG	-	AIC1750-WDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYWDP	-	AIC1750-WDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWEG	-	AIC1750-WEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWEP	-	AIC1750-WEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWFG	-	AIC1750-WFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWFP	-	AIC1750-WFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWGG	-	AIC1750-WGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWGP	-	AIC1750-WGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWHG	-	AIC1750-WHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWHP	-	AIC1750-WHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWIG	-	AIC1750-WIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWIP	-	AIC1750-WIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWJG	-	AIC1750-WJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWJP	-	AIC1750-WJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWKG	-	AIC1750-WKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWKP	-	AIC1750-WKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWLG	-	AIC1750-WLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWLP	-	AIC1750-WLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWMG	-	AIC1750-WMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWMP	-	AIC1750-WMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWNG	-	AIC1750-WNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWNP	-	AIC1750-WNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWOG	-	AIC1750-WOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWOP	-	AIC1750-WOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWPG	-	AIC1750-WPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWPP	-	AIC1750-WPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWQG	-	AIC1750-WQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWQP	-	AIC1750-WQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWRG	-	AIC1750-WRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWRP	-	AIC1750-WRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWSG	-	AIC1750-WSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWSP	-	AIC1750-WSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWTG	-	AIC1750-WTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWTP	-	AIC1750-WTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWUG	-	AIC1750-WUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWUP	-	AIC1750-WUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWVG	-	AIC1750-WVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWVP	-	AIC1750-WVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWWG	-	AIC1750-WWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWWP	-	AIC1750-WWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWXG	-	AIC1750-WXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYWXP	-	AIC1750-WXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXAG	-	AIC1750-XAGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXAP	-	AIC1750-XAPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXBG	-	AIC1750-XBGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXBP	-	AIC1750-XBPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXCG	-	AIC1750-XCGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXCP	-	AIC1750-XCPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXDG	-	AIC1750-XDGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXDP	-	AIC1750-XDPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXEG	-	AIC1750-XEGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXEP	-	AIC1750-XEPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXFG	-	AIC1750-XFGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXFP	-	AIC1750-XFPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXGG	-	AIC1750-XGGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXGP	-	AIC1750-XGPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXHG	-	AIC1750-XHGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXHP	-	AIC1750-XHPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXIG	-	AIC1750-XIGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXIP	-	AIC1750-XIPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXJG	-	AIC1750-XJGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXJP	-	AIC1750-XJPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXKG	-	AIC1750-XKGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXKP	-	AIC1750-XKPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXLG	-	AIC1750-XLGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXLP	-	AIC1750-XLPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXMG	-	AIC1750-XMGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXMP	-	AIC1750-XMPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXNG	-	AIC1750-XNGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXNP	-	AIC1750-XNPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXOG	-	AIC1750-XOGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BYXOP	-	AIC1750-XOPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXPG	-	AIC1750-XPGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXPP	-	AIC1750-XPPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXQG	-	AIC1750-XQGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXQP	-	AIC1750-XQPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXRG	-	AIC1750-XRGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXRP	-	AIC1750-XRPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXSG	-	AIC1750-XSGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXSP	-	AIC1750-XSPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXTG	-	AIC1750-XTGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXTP	-	AIC1750-XTPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXUG	-	AIC1750-XUGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXUP	-	AIC1750-XUPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXVG	-	AIC1750-XVGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXVP	-	AIC1750-XVPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXWG	-	AIC1750-XWGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXWP	-	AIC1750-XWPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXXG	-	AIC1750-XXGKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BYXXP	-	AIC1750-XXPKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Aic
BZ	-	R5421N152F	BM-IC	Li-Ion, over-charge/discharge protection, Vd=5.2V	SOT-23-6	xj	VBM1	7da	Ric
BZAAG	-	AIC1750-AAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAAP	-	AIC1750-AAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZABG	-	AIC1750-ABGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZABP	-	AIC1750-ABPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZACG	-	AIC1750-ACGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZACP	-	AIC1750-ACPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZADG	-	AIC1750-ADGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZADP	-	AIC1750-ADPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAEG	-	AIC1750-AEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAEP	-	AIC1750-AEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAFG	-	AIC1750-AFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAFP	-	AIC1750-AFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAGG	-	AIC1750-AGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAGP	-	AIC1750-AGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAHG	-	AIC1750-AHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAHP	-	AIC1750-AHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAIG	-	AIC1750-AIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAIP	-	AIC1750-AIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAJG	-	AIC1750-AJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAJP	-	AIC1750-AJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAKG	-	AIC1750-AKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAKP	-	AIC1750-AKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZALG	-	AIC1750-ALGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZALP	-	AIC1750-ALPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAMG	-	AIC1750-AMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAMP	-	AIC1750-AMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZANG	-	AIC1750-ANGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZANP	-	AIC1750-ANPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAOG	-	AIC1750-AOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAOP	-	AIC1750-AOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAPG	-	AIC1750-APGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAPP	-	AIC1750-APPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAQG	-	AIC1750-AQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAQP	-	AIC1750-AQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZARG	-	AIC1750-ARGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZARP	-	AIC1750-ARPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZASG	-	AIC1750-ASGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZASP	-	AIC1750-ASPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZATG	-	AIC1750-ATGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZATP	-	AIC1750-ATPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAUG	-	AIC1750-AUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAUP	-	AIC1750-AUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAVG	-	AIC1750-AVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAVP	-	AIC1750-AVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAWG	-	AIC1750-AWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAWP	-	AIC1750-AWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAXG	-	AIC1750-AXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZAXP	-	AIC1750-AXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBAG	-	AIC1750-BAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBAP	-	AIC1750-BAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BZBBG	-	AIC1750-BBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBBP	-	AIC1750-BBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBCG	-	AIC1750-BCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBCP	-	AIC1750-BCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBDG	-	AIC1750-BDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBDP	-	AIC1750-BDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBEG	-	AIC1750-BEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBEP	-	AIC1750-BEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBFG	-	AIC1750-BFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBFP	-	AIC1750-BFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBGG	-	AIC1750-BGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBGP	-	AIC1750-BGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBHG	-	AIC1750-BHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBHP	-	AIC1750-BHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBIG	-	AIC1750-BIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBIP	-	AIC1750-BIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBJG	-	AIC1750-BJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBJP	-	AIC1750-BJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBKG	-	AIC1750-BKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBKP	-	AIC1750-BKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBLG	-	AIC1750-BLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBLP	-	AIC1750-BLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBMG	-	AIC1750-BMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBMP	-	AIC1750-BMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBNG	-	AIC1750-BNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBNP	-	AIC1750-BNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBOG	-	AIC1750-BOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBOP	-	AIC1750-BOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBPG	-	AIC1750-BPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBPP	-	AIC1750-BPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBQG	-	AIC1750-BQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBQP	-	AIC1750-BQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBRG	-	AIC1750-BRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBRP	-	AIC1750-BRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBSG	-	AIC1750-BSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBSP	-	AIC1750-BSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBTG	-	AIC1750-BTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBTP	-	AIC1750-BTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBUG	-	AIC1750-BUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBUP	-	AIC1750-BUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBVG	-	AIC1750-BVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBVP	-	AIC1750-BVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBWG	-	AIC1750-BWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBWP	-	AIC1750-BWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBXG	-	AIC1750-BXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZBXP	-	AIC1750-BXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCAG	-	AIC1750-CAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCAP	-	AIC1750-CAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCBG	-	AIC1750-CBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCBP	-	AIC1750-CBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCCG	-	AIC1750-CCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCCP	-	AIC1750-CCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCDG	-	AIC1750-CDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCDP	-	AIC1750-CDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCEG	-	AIC1750-CEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCEP	-	AIC1750-CEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCFG	-	AIC1750-CFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCFP	-	AIC1750-CFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCGG	-	AIC1750-CGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCGP	-	AIC1750-CGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCHG	-	AIC1750-CHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCHP	-	AIC1750-CHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCIG	-	AIC1750-CIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCIP	-	AIC1750-CIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCJG	-	AIC1750-CJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCJP	-	AIC1750-CJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCKG	-	AIC1750-CKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCKP	-	AIC1750-CKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCLG	-	AIC1750-CLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCLP	-	AIC1750-CLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BZCMG	-	AIC1750-CMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCMP	-	AIC1750-CMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCNG	-	AIC1750-CNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCNP	-	AIC1750-CNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCOG	-	AIC1750-COGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCOP	-	AIC1750-COPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCPG	-	AIC1750-CPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCPP	-	AIC1750-CPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCQG	-	AIC1750-CQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCQP	-	AIC1750-CQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCRG	-	AIC1750-CRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCRP	-	AIC1750-CRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCSG	-	AIC1750-CSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCSP	-	AIC1750-CSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCTG	-	AIC1750-CYGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCTP	-	AIC1750-CYPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCUG	-	AIC1750-CUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCUP	-	AIC1750-CUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCVG	-	AIC1750-CVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCVP	-	AIC1750-CVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCWG	-	AIC1750-CWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCWP	-	AIC1750-CWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCXG	-	AIC1750-CXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZCXP	-	AIC1750-CXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDAG	-	AIC1750-DAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDAP	-	AIC1750-DAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDBG	-	AIC1750-DBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDBP	-	AIC1750-DBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDCG	-	AIC1750-DCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDCP	-	AIC1750-DCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDDG	-	AIC1750-DDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDDP	-	AIC1750-DDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDEG	-	AIC1750-DEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDEP	-	AIC1750-DEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDFG	-	AIC1750-DFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDFP	-	AIC1750-DFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDGG	-	AIC1750-DGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDGP	-	AIC1750-DGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDHG	-	AIC1750-DHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDHP	-	AIC1750-DHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDIG	-	AIC1750-DIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDIP	-	AIC1750-DIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDJG	-	AIC1750-DJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDJP	-	AIC1750-DJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDKG	-	AIC1750-DKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDKP	-	AIC1750-DKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDLG	-	AIC1750-DLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDLP	-	AIC1750-DLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDMG	-	AIC1750-DMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDMP	-	AIC1750-DMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDNG	-	AIC1750-DNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDNP	-	AIC1750-DNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDOG	-	AIC1750-DOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDOP	-	AIC1750-DOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDPG	-	AIC1750-DPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDPP	-	AIC1750-DPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDQG	-	AIC1750-DQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDQP	-	AIC1750-DQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDRG	-	AIC1750-DRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDRP	-	AIC1750-DRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDSG	-	AIC1750-DSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDSP	-	AIC1750-DSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDTG	-	AIC1750-DTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDTP	-	AIC1750-DTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDUG	-	AIC1750-DUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDUP	-	AIC1750-DUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDVG	-	AIC1750-DVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDVP	-	AIC1750-DVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDWG	-	AIC1750-DWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDWP	-	AIC1750-DWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BZDXG	-	AIC1750-DXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZDXP	-	AIC1750-DXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEAG	-	AIC1750-EAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEAP	-	AIC1750-EAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEBG	-	AIC1750-EBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEBP	-	AIC1750-EBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZECG	-	AIC1750-ECGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZECP	-	AIC1750-ECPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEDG	-	AIC1750-EDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEDP	-	AIC1750-EDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEEG	-	AIC1750-EEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEEP	-	AIC1750-EEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEFG	-	AIC1750-EFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEFP	-	AIC1750-EFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEGG	-	AIC1750-EGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEGP	-	AIC1750-EGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEHG	-	AIC1750-EHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEHP	-	AIC1750-EHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEIG	-	AIC1750-EIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEIP	-	AIC1750-EIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEJG	-	AIC1750-EJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEJP	-	AIC1750-EJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEKG	-	AIC1750-EKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEKP	-	AIC1750-EKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZELG	-	AIC1750-ELGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZELP	-	AIC1750-ELPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEMG	-	AIC1750-EMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEMP	-	AIC1750-EMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZENG	-	AIC1750-ENGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZENP	-	AIC1750-ENPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEOG	-	AIC1750-EOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEOP	-	AIC1750-EOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEPG	-	AIC1750-EPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEPP	-	AIC1750-EPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEQG	-	AIC1750-EQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEQP	-	AIC1750-EQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZERG	-	AIC1750-ERGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZERP	-	AIC1750-ERPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZESG	-	AIC1750-ESGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZESP	-	AIC1750-ESPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZETG	-	AIC1750-ETGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZETP	-	AIC1750-ETPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEUG	-	AIC1750-EUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEUP	-	AIC1750-EUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEVG	-	AIC1750-EVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEVP	-	AIC1750-EVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEWG	-	AIC1750-EWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEWP	-	AIC1750-EWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEXG	-	AIC1750-EXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZEXP	-	AIC1750-EXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFAG	-	AIC1750-FAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFAP	-	AIC1750-FAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFBG	-	AIC1750-FBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFBP	-	AIC1750-FBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFCG	-	AIC1750-FCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFCP	-	AIC1750-FCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFDG	-	AIC1750-FDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFDP	-	AIC1750-FDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFEG	-	AIC1750-FEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFEP	-	AIC1750-FEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFFG	-	AIC1750-FFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFFP	-	AIC1750-FFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFGG	-	AIC1750-FGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFGP	-	AIC1750-FGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFHG	-	AIC1750-FHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFHP	-	AIC1750-FHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFIG	-	AIC1750-FIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFIP	-	AIC1750-FIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFJG	-	AIC1750-FJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFJP	-	AIC1750-FJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BZFKG	-	AIC1750-FKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFKP	-	AIC1750-FKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFLG	-	AIC1750-FLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFLP	-	AIC1750-FLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFMG	-	AIC1750-FMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFMP	-	AIC1750-FMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFNG	-	AIC1750-FNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFNP	-	AIC1750-FNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFOG	-	AIC1750-FOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFOP	-	AIC1750-FOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFPG	-	AIC1750-FPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFPP	-	AIC1750-FPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFQG	-	AIC1750-FQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFQP	-	AIC1750-FQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFRG	-	AIC1750-FRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFRP	-	AIC1750-FRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFSG	-	AIC1750-FSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFSP	-	AIC1750-FSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFTG	-	AIC1750-FTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFTP	-	AIC1750-FTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFUG	-	AIC1750-FUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFUP	-	AIC1750-FUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFVG	-	AIC1750-FVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFVP	-	AIC1750-FVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFWG	-	AIC1750-FWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFWP	-	AIC1750-FWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFXG	-	AIC1750-FXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZFXP	-	AIC1750-FXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGAG	-	AIC1750-GAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGAP	-	AIC1750-GAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGBG	-	AIC1750-GBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGBP	-	AIC1750-GBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGCG	-	AIC1750-GCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGCP	-	AIC1750-GCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGDG	-	AIC1750-GDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGDP	-	AIC1750-GDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGEG	-	AIC1750-GEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGEP	-	AIC1750-GEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGFG	-	AIC1750-GFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGFP	-	AIC1750-GFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGGG	-	AIC1750-GGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGGP	-	AIC1750-GGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGHG	-	AIC1750-GHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGHP	-	AIC1750-GHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGIG	-	AIC1750-GIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGIP	-	AIC1750-GIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGJG	-	AIC1750-GJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGJP	-	AIC1750-GJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGKG	-	AIC1750-GKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGKP	-	AIC1750-GKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGLG	-	AIC1750-GLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGLP	-	AIC1750-GLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGMG	-	AIC1750-GMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGMP	-	AIC1750-GMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGNG	-	AIC1750-GNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGNP	-	AIC1750-GNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGOG	-	AIC1750-GOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGOP	-	AIC1750-GOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGPG	-	AIC1750-GPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGPP	-	AIC1750-GPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGQG	-	AIC1750-GQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGQP	-	AIC1750-GQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGRG	-	AIC1750-GRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGRP	-	AIC1750-GRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGSG	-	AIC1750-GSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGSP	-	AIC1750-GSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGTG	-	AIC1750-GTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGTP	-	AIC1750-GTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGUG	-	AIC1750-GUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGUP	-	AIC1750-GUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BZGVG	-	AIC1750-GVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGVP	-	AIC1750-GVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGWG	-	AIC1750-GWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGWP	-	AIC1750-GWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGXG	-	AIC1750-GXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZGXP	-	AIC1750-GXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHAG	-	AIC1750-HAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHAP	-	AIC1750-HAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHBG	-	AIC1750-HBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHBP	-	AIC1750-HBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHCG	-	AIC1750-HCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHCP	-	AIC1750-HCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHDG	-	AIC1750-HDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHDP	-	AIC1750-HDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHEG	-	AIC1750-HEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHEP	-	AIC1750-HEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHFG	-	AIC1750-HFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHFP	-	AIC1750-HFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHGG	-	AIC1750-HGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHGP	-	AIC1750-HGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHHG	-	AIC1750-HHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHHP	-	AIC1750-HHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHIG	-	AIC1750-HIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHIP	-	AIC1750-HIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHJG	-	AIC1750-HJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHJP	-	AIC1750-HJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHKG	-	AIC1750-HKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHKP	-	AIC1750-HKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHLG	-	AIC1750-HLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHLP	-	AIC1750-HLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHMG	-	AIC1750-HMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHMP	-	AIC1750-HMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHNG	-	AIC1750-HNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHNP	-	AIC1750-HNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHOG	-	AIC1750-HOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHOP	-	AIC1750-HOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHPG	-	AIC1750-HPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHPP	-	AIC1750-HPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHQG	-	AIC1750-HQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHQP	-	AIC1750-HQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHRG	-	AIC1750-HRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHRP	-	AIC1750-HRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHSG	-	AIC1750-HSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHSP	-	AIC1750-HSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHTG	-	AIC1750-HTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHTP	-	AIC1750-HTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHUG	-	AIC1750-HUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHUP	-	AIC1750-HUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHVG	-	AIC1750-HVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHVP	-	AIC1750-HVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHWG	-	AIC1750-HWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHWP	-	AIC1750-HWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHXG	-	AIC1750-HXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZHXP	-	AIC1750-HXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIAG	-	AIC1750-IAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIAP	-	AIC1750-IAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIBG	-	AIC1750-IBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIBP	-	AIC1750-IBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZICG	-	AIC1750-ICGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZICP	-	AIC1750-ICPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIDG	-	AIC1750-IDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIDP	-	AIC1750-IDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIEG	-	AIC1750-IEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIEP	-	AIC1750-IEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIFG	-	AIC1750-IFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIFP	-	AIC1750-IFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIGG	-	AIC1750-IGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIGP	-	AIC1750-IGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIHG	-	AIC1750-IHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIHP	-	AIC1750-IHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BZIIG	-	AIC1750-IIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIIP	-	AIC1750-IIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIJG	-	AIC1750-IJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIJP	-	AIC1750-IJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIKG	-	AIC1750-IKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIKP	-	AIC1750-IKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZILG	-	AIC1750-ILGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZILP	-	AIC1750-ILPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIMG	-	AIC1750-IMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIMP	-	AIC1750-IMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZING	-	AIC1750-INGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZINP	-	AIC1750-INPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIOG	-	AIC1750-IOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIOP	-	AIC1750-IOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIPG	-	AIC1750-IPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIPP	-	AIC1750-IPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIQG	-	AIC1750-IQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIQP	-	AIC1750-IQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIRG	-	AIC1750-IRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIRP	-	AIC1750-IRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZISG	-	AIC1750-ISGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZISP	-	AIC1750-ISPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZITG	-	AIC1750-ITGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZITP	-	AIC1750-ITPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIUG	-	AIC1750-IUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIUP	-	AIC1750-IUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIVG	-	AIC1750-IVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIVP	-	AIC1750-IVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIWG	-	AIC1750-IWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIWP	-	AIC1750-IWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIXG	-	AIC1750-IXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZIXP	-	AIC1750-IXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJAG	-	AIC1750-JAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJAP	-	AIC1750-JAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJBG	-	AIC1750-JBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJBP	-	AIC1750-JBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJCG	-	AIC1750-JCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJCP	-	AIC1750-JCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJDG	-	AIC1750-JDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJDP	-	AIC1750-JDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJEG	-	AIC1750-JEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJEP	-	AIC1750-JEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJFG	-	AIC1750-JFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJFP	-	AIC1750-JFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJGG	-	AIC1750-JGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJGP	-	AIC1750-JGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJHG	-	AIC1750-JHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJHP	-	AIC1750-JHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJIG	-	AIC1750-JIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJIP	-	AIC1750-JIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJJG	-	AIC1750-JJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJJP	-	AIC1750-JJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJKG	-	AIC1750-JKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJKP	-	AIC1750-JKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJLG	-	AIC1750-JLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJLP	-	AIC1750-JLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJMG	-	AIC1750-JMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJMP	-	AIC1750-JMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJNG	-	AIC1750-JNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJNP	-	AIC1750-JNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJOG	-	AIC1750-JOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJOP	-	AIC1750-JOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJPG	-	AIC1750-JPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJPP	-	AIC1750-JPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJQG	-	AIC1750-JQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJQP	-	AIC1750-JQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJRG	-	AIC1750-JRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJRP	-	AIC1750-JRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJSG	-	AIC1750-JSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJSP	-	AIC1750-JSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BZJTG	-	AIC1750-JTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJTP	-	AIC1750-JTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJUG	-	AIC1750-JUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJUP	-	AIC1750-JUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJVG	-	AIC1750-JVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJVP	-	AIC1750-JVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJWG	-	AIC1750-JWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJWP	-	AIC1750-JWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJXG	-	AIC1750-JXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZJXP	-	AIC1750-JXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKAG	-	AIC1750-KAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKAP	-	AIC1750-KAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKBG	-	AIC1750-KBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKBP	-	AIC1750-KBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKCG	-	AIC1750-KCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKCP	-	AIC1750-KCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKDG	-	AIC1750-KDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKDP	-	AIC1750-KDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKEG	-	AIC1750-KEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKEP	-	AIC1750-KEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKFG	-	AIC1750-KFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKFP	-	AIC1750-KFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKGG	-	AIC1750-KGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKGP	-	AIC1750-KGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKHG	-	AIC1750-KHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKHP	-	AIC1750-KHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKIG	-	AIC1750-KIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKIP	-	AIC1750-KIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKJG	-	AIC1750-KJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKJP	-	AIC1750-KJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKKG	-	AIC1750-KKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKKP	-	AIC1750-KKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKLG	-	AIC1750-KLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKLP	-	AIC1750-KLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKMG	-	AIC1750-KMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKMP	-	AIC1750-KMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKNG	-	AIC1750-KNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKNP	-	AIC1750-KNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKOG	-	AIC1750-KOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKOP	-	AIC1750-KOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKPG	-	AIC1750-KPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKPP	-	AIC1750-KPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKQG	-	AIC1750-KQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKQP	-	AIC1750-KQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKRG	-	AIC1750-KRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKRP	-	AIC1750-KRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKSG	-	AIC1750-KSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKSP	-	AIC1750-KSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKTG	-	AIC1750-KTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKTP	-	AIC1750-KTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKUG	-	AIC1750-KUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKUP	-	AIC1750-KUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKVG	-	AIC1750-KVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKVP	-	AIC1750-KVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKWG	-	AIC1750-KWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKWP	-	AIC1750-KWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKXG	-	AIC1750-KXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZKXP	-	AIC1750-KXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLAG	-	AIC1750-LAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLAP	-	AIC1750-LAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLBG	-	AIC1750-LBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLBP	-	AIC1750-LBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLCG	-	AIC1750-LCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLCP	-	AIC1750-LCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLDG	-	AIC1750-LDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLDP	-	AIC1750-LDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLEG	-	AIC1750-LEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLEP	-	AIC1750-LEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLFG	-	AIC1750-LFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLFP	-	AIC1750-LFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BZLGG	-	AIC1750-LGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLGP	-	AIC1750-LGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLHG	-	AIC1750-LHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLHP	-	AIC1750-LHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLIG	-	AIC1750-LIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLIP	-	AIC1750-LIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLJG	-	AIC1750-LJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLJP	-	AIC1750-LJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLKG	-	AIC1750-LKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLKP	-	AIC1750-LKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLLG	-	AIC1750-LLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLLP	-	AIC1750-LLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLMG	-	AIC1750-LMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLMP	-	AIC1750-LMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLNG	-	AIC1750-LNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLNP	-	AIC1750-LNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLOG	-	AIC1750-LOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLOP	-	AIC1750-LOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLPG	-	AIC1750-LPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLPP	-	AIC1750-LPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLQG	-	AIC1750-LQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLQP	-	AIC1750-LQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLRG	-	AIC1750-LRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLRP	-	AIC1750-LRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLSG	-	AIC1750-LSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLSP	-	AIC1750-LSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLTG	-	AIC1750-LTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLTP	-	AIC1750-LTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLUG	-	AIC1750-LUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLUP	-	AIC1750-LUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLVG	-	AIC1750-LVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLVP	-	AIC1750-LVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLWG	-	AIC1750-LWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLWP	-	AIC1750-LWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLXG	-	AIC1750-LXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZLXP	-	AIC1750-LXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMAG	-	AIC1750-MAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMAP	-	AIC1750-MAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMBG	-	AIC1750-MBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMBP	-	AIC1750-MBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMCG	-	AIC1750-MCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMCP	-	AIC1750-MCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMDG	-	AIC1750-MDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMDP	-	AIC1750-MDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMEG	-	AIC1750-MEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMEP	-	AIC1750-MEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMFG	-	AIC1750-MFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMFP	-	AIC1750-MFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMGG	-	AIC1750-MGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMGP	-	AIC1750-MGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMHG	-	AIC1750-MHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMHP	-	AIC1750-MHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMIG	-	AIC1750-MIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMIP	-	AIC1750-MIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMJG	-	AIC1750-MJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMJP	-	AIC1750-MJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMKG	-	AIC1750-MKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMKP	-	AIC1750-MKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMLG	-	AIC1750-MLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMLP	-	AIC1750-MLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMMG	-	AIC1750-MMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMMP	-	AIC1750-MMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMNG	-	AIC1750-MNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMNP	-	AIC1750-MNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMOG	-	AIC1750-MOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMOP	-	AIC1750-MOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMPG	-	AIC1750-MPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMPP	-	AIC1750-MPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMQG	-	AIC1750-MQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMQP	-	AIC1750-MQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BZMRG	-	AIC1750-MRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMRP	-	AIC1750-MRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMSG	-	AIC1750-MSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMSP	-	AIC1750-MSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMTG	-	AIC1750-MTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMTP	-	AIC1750-MTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMUG	-	AIC1750-MUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMUP	-	AIC1750-MUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMVG	-	AIC1750-MVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMVP	-	AIC1750-MVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMWG	-	AIC1750-MWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMWP	-	AIC1750-MWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMXG	-	AIC1750-MXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZMXP	-	AIC1750-MXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNAG	-	AIC1750-NAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNAP	-	AIC1750-NAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNBG	-	AIC1750-NBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNBP	-	AIC1750-NBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNCG	-	AIC1750-NCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNCP	-	AIC1750-NCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNDG	-	AIC1750-NDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNDP	-	AIC1750-NDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNEG	-	AIC1750-NEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNEP	-	AIC1750-NEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNFG	-	AIC1750-NFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNFP	-	AIC1750-NFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNGG	-	AIC1750-NGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNGP	-	AIC1750-NGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNHG	-	AIC1750-NHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNHP	-	AIC1750-NHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNIG	-	AIC1750-NIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNIP	-	AIC1750-NIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNJG	-	AIC1750-NJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNJP	-	AIC1750-NJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNKG	-	AIC1750-NKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNKP	-	AIC1750-NKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNLG	-	AIC1750-NLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNLP	-	AIC1750-NLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNMG	-	AIC1750-NMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNMP	-	AIC1750-NMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNNG	-	AIC1750-NNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNNP	-	AIC1750-NNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNOG	-	AIC1750-NOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNOP	-	AIC1750-NOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNPG	-	AIC1750-NPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNPP	-	AIC1750-NPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNQG	-	AIC1750-NQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNQP	-	AIC1750-NQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNRG	-	AIC1750-NRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNRP	-	AIC1750-NRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNSG	-	AIC1750-NSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNSP	-	AIC1750-NSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNTG	-	AIC1750-NTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNTP	-	AIC1750-NTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNUG	-	AIC1750-NUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNUP	-	AIC1750-NUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNVG	-	AIC1750-NVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNVP	-	AIC1750-NVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNWG	-	AIC1750-NWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNWP	-	AIC1750-NWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNXG	-	AIC1750-NXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZNXP	-	AIC1750-NXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOAG	-	AIC1750-OAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOAP	-	AIC1750-OAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOBG	-	AIC1750-OBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOBP	-	AIC1750-OBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOCG	-	AIC1750-OCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOCP	-	AIC1750-OCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZODG	-	AIC1750-ODGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZODP	-	AIC1750-ODPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BZOEG	-	AIC1750-OEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOEP	-	AIC1750-OEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOFG	-	AIC1750-OFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOFP	-	AIC1750-OFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOGG	-	AIC1750-OGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOGP	-	AIC1750-OGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOHG	-	AIC1750-OHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOHP	-	AIC1750-OHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOIG	-	AIC1750-OIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOIP	-	AIC1750-OIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOJG	-	AIC1750-OJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOJP	-	AIC1750-OJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOKG	-	AIC1750-OKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOKP	-	AIC1750-OKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOLG	-	AIC1750-OLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOLP	-	AIC1750-OLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOMG	-	AIC1750-OMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOMP	-	AIC1750-OMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZONG	-	AIC1750-ONGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZONP	-	AIC1750-ONPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOOG	-	AIC1750-OOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOOP	-	AIC1750-OOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOPG	-	AIC1750-OPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOPP	-	AIC1750-OPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOQG	-	AIC1750-OQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOQP	-	AIC1750-OQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZORG	-	AIC1750-ORGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZORP	-	AIC1750-ORPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOSG	-	AIC1750-OSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOSP	-	AIC1750-OSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOTG	-	AIC1750-OTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOTP	-	AIC1750-OTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOUG	-	AIC1750-OUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOUP	-	AIC1750-OUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOVG	-	AIC1750-OVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOVP	-	AIC1750-OVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOWG	-	AIC1750-OWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOWP	-	AIC1750-OWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOXG	-	AIC1750-OXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZOXP	-	AIC1750-OXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPAG	-	AIC1750-PAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPAP	-	AIC1750-PAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPBG	-	AIC1750-PBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPBP	-	AIC1750-PBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPCG	-	AIC1750-PCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPCP	-	AIC1750-PCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPDG	-	AIC1750-PDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPDP	-	AIC1750-PDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPEG	-	AIC1750-PEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPEP	-	AIC1750-PEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPFG	-	AIC1750-PFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPFP	-	AIC1750-PFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPGG	-	AIC1750-PGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPGP	-	AIC1750-PGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPHG	-	AIC1750-PHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPHP	-	AIC1750-PHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPIG	-	AIC1750-PIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPIP	-	AIC1750-PIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPJG	-	AIC1750-PJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPJP	-	AIC1750-PJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPKG	-	AIC1750-PKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPKP	-	AIC1750-PKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPLG	-	AIC1750-PLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPLP	-	AIC1750-PLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPMG	-	AIC1750-PMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPMP	-	AIC1750-PMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPNG	-	AIC1750-PNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPNP	-	AIC1750-PNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPOG	-	AIC1750-POGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPOP	-	AIC1750-POPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BZPPG	-	AIC1750-PPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPPP	-	AIC1750-PPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPQG	-	AIC1750-PQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPQP	-	AIC1750-PQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPRG	-	AIC1750-PRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPRP	-	AIC1750-PRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPSG	-	AIC1750-PSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPSP	-	AIC1750-PSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPTG	-	AIC1750-PTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPTP	-	AIC1750-PTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPUG	-	AIC1750-PUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPUP	-	AIC1750-PUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPVG	-	AIC1750-PVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPVP	-	AIC1750-PVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPWG	-	AIC1750-PWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPWP	-	AIC1750-PWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPXG	-	AIC1750-PXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZPXP	-	AIC1750-PXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQAG	-	AIC1750-QAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQAP	-	AIC1750-QAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQBG	-	AIC1750-QBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQBP	-	AIC1750-QBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQCG	-	AIC1750-QCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQCP	-	AIC1750-QCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQDG	-	AIC1750-QDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQDP	-	AIC1750-QDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQEG	-	AIC1750-QEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQEP	-	AIC1750-QEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQFG	-	AIC1750-QFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQFP	-	AIC1750-QFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQGG	-	AIC1750-QGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQGP	-	AIC1750-QGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQHG	-	AIC1750-QHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQHP	-	AIC1750-QHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQIG	-	AIC1750-QIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQIP	-	AIC1750-QIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQJG	-	AIC1750-QJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQJP	-	AIC1750-QJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQKG	-	AIC1750-QKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQKP	-	AIC1750-QKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQLG	-	AIC1750-QLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQLP	-	AIC1750-QLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQMG	-	AIC1750-QMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQMP	-	AIC1750-QMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQNG	-	AIC1750-QNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQNP	-	AIC1750-QNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQOG	-	AIC1750-QOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQOP	-	AIC1750-QOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQPG	-	AIC1750-QPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQPP	-	AIC1750-QPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQQG	-	AIC1750-QQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQQP	-	AIC1750-QQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQRG	-	AIC1750-QRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQRP	-	AIC1750-QRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQSG	-	AIC1750-QSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQSP	-	AIC1750-QSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQTG	-	AIC1750-QTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQTP	-	AIC1750-QTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQUG	-	AIC1750-QUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQUP	-	AIC1750-QUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQVG	-	AIC1750-QVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQVP	-	AIC1750-QVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQWG	-	AIC1750-QWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQWP	-	AIC1750-QWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQXG	-	AIC1750-QXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZQXP	-	AIC1750-QXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRAG	-	AIC1750-RAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRAP	-	AIC1750-RAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRBG	-	AIC1750-RBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRBP	-	AIC1750-RBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BZRCG	-	AIC1750-RCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRCP	-	AIC1750-RCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRDG	-	AIC1750-RDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRDP	-	AIC1750-RDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZREG	-	AIC1750-REGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZREP	-	AIC1750-REPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRFG	-	AIC1750-RFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRFP	-	AIC1750-RFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRGG	-	AIC1750-RGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRGP	-	AIC1750-RGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRHG	-	AIC1750-RHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRHP	-	AIC1750-RHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRIG	-	AIC1750-RIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRIP	-	AIC1750-RIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRJG	-	AIC1750-RJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRJP	-	AIC1750-RJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRKG	-	AIC1750-RKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRKP	-	AIC1750-RKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRLG	-	AIC1750-RLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRLP	-	AIC1750-RLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRMG	-	AIC1750-RMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRMP	-	AIC1750-RMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRNG	-	AIC1750-RNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRNP	-	AIC1750-RNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZROG	-	AIC1750-ROGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZROP	-	AIC1750-ROPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRPG	-	AIC1750-RPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRPP	-	AIC1750-RPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRQG	-	AIC1750-RQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRQP	-	AIC1750-RQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRRG	-	AIC1750-RRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRRP	-	AIC1750-RRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRSG	-	AIC1750-RSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRSP	-	AIC1750-RSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRTG	-	AIC1750-RTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRTP	-	AIC1750-RTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRUG	-	AIC1750-RUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRUP	-	AIC1750-RUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRVG	-	AIC1750-RVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRVP	-	AIC1750-RVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRWG	-	AIC1750-RWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRWP	-	AIC1750-RWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRXG	-	AIC1750-RXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZRXP	-	AIC1750-RXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSAG	-	AIC1750-SAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSAP	-	AIC1750-SAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSBG	-	AIC1750-SBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSBP	-	AIC1750-SBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSCG	-	AIC1750-SCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSCP	-	AIC1750-SCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSDG	-	AIC1750-SDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSDP	-	AIC1750-SDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSEG	-	AIC1750-SEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSEP	-	AIC1750-SEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSFG	-	AIC1750-SFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSFP	-	AIC1750-SFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSGG	-	AIC1750-SGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSGP	-	AIC1750-SGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSHG	-	AIC1750-SHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSHP	-	AIC1750-SHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSIG	-	AIC1750-SIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSIP	-	AIC1750-SIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSJG	-	AIC1750-SJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSJP	-	AIC1750-SJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSKG	-	AIC1750-SKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSKP	-	AIC1750-SKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSLG	-	AIC1750-SLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSLP	-	AIC1750-SLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSMG	-	AIC1750-SMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSMP	-	AIC1750-SMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BZSNG	-	AIC1750-SNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSNP	-	AIC1750-SNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSOG	-	AIC1750-SOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSOP	-	AIC1750-SOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSPG	-	AIC1750-SPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSPP	-	AIC1750-SPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSQG	-	AIC1750-SQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSQP	-	AIC1750-SQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSRG	-	AIC1750-SRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSRP	-	AIC1750-SRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSSG	-	AIC1750-SSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSSP	-	AIC1750-SSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSTG	-	AIC1750-STGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSTP	-	AIC1750-STPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSUG	-	AIC1750-SUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSUP	-	AIC1750-SUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSVG	-	AIC1750-SVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSVP	-	AIC1750-SVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSWG	-	AIC1750-SWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSWP	-	AIC1750-SWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSXG	-	AIC1750-SXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZSXP	-	AIC1750-SXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTAG	-	AIC1750-TAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTAP	-	AIC1750-TAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTBG	-	AIC1750-TBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTBP	-	AIC1750-TBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTCG	-	AIC1750-TCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTCP	-	AIC1750-TCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTDG	-	AIC1750-TDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTDP	-	AIC1750-TDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTEG	-	AIC1750-TEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTEP	-	AIC1750-TEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTFG	-	AIC1750-TFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTFP	-	AIC1750-TFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTGG	-	AIC1750-TGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTGP	-	AIC1750-TGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTHG	-	AIC1750-THGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTHP	-	AIC1750-THPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTIG	-	AIC1750-TIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTIP	-	AIC1750-TIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTJG	-	AIC1750-TJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTJP	-	AIC1750-TJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTKG	-	AIC1750-TKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTKP	-	AIC1750-TKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTLG	-	AIC1750-TLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTLP	-	AIC1750-TLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTMG	-	AIC1750-TMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTMP	-	AIC1750-TMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTNG	-	AIC1750-TNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTNP	-	AIC1750-TNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTOG	-	AIC1750-TOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTOP	-	AIC1750-TOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTPG	-	AIC1750-TPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTPP	-	AIC1750-TPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTQG	-	AIC1750-TQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTQP	-	AIC1750-TQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTRG	-	AIC1750-TRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTRP	-	AIC1750-TRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTSG	-	AIC1750-TSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTSP	-	AIC1750-TSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTTG	-	AIC1750-TTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTTP	-	AIC1750-TTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTUG	-	AIC1750-TUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTUP	-	AIC1750-TUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTVG	-	AIC1750-TVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTVP	-	AIC1750-TVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTWG	-	AIC1750-TWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTWP	-	AIC1750-TWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTXG	-	AIC1750-TXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZTXP	-	AIC1750-TXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BZUAG	-	AIC1750-UAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUAP	-	AIC1750-UAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUBG	-	AIC1750-UBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUBP	-	AIC1750-UBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUCG	-	AIC1750-UCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUCP	-	AIC1750-UCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUDG	-	AIC1750-UDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUDP	-	AIC1750-UDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUEG	-	AIC1750-UEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUEP	-	AIC1750-UEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUFG	-	AIC1750-UFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUFP	-	AIC1750-UFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUGG	-	AIC1750-UGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUGP	-	AIC1750-UGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUHG	-	AIC1750-UHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUHP	-	AIC1750-UHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUIG	-	AIC1750-UIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUIP	-	AIC1750-UIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUJG	-	AIC1750-UJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUJP	-	AIC1750-UJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUKG	-	AIC1750-UKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUKP	-	AIC1750-UKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZULG	-	AIC1750-ULGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZULP	-	AIC1750-ULPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUMG	-	AIC1750-UMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUMP	-	AIC1750-UMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUNG	-	AIC1750-UNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUNP	-	AIC1750-UNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUOG	-	AIC1750-UOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUOP	-	AIC1750-UOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUPG	-	AIC1750-UPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUPP	-	AIC1750-UPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUQG	-	AIC1750-UQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUQP	-	AIC1750-UQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZURG	-	AIC1750-URGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZURP	-	AIC1750-URPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUSG	-	AIC1750-USGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUSP	-	AIC1750-USPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUTG	-	AIC1750-UTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUTP	-	AIC1750-UTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUUG	-	AIC1750-UUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUUP	-	AIC1750-UUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUVG	-	AIC1750-UVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUVP	-	AIC1750-UVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUWG	-	AIC1750-UWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUWP	-	AIC1750-UWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUXG	-	AIC1750-UXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZUXP	-	AIC1750-UXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVAG	-	AIC1750-VAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVAP	-	AIC1750-VAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVBG	-	AIC1750-VBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVBP	-	AIC1750-VBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVCG	-	AIC1750-VCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVCP	-	AIC1750-VCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVDG	-	AIC1750-VDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVDP	-	AIC1750-VDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVEG	-	AIC1750-VEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVEP	-	AIC1750-VEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVFG	-	AIC1750-VFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVFP	-	AIC1750-VFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVGG	-	AIC1750-VGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVGP	-	AIC1750-VGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVHG	-	AIC1750-VHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVHP	-	AIC1750-VHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVIG	-	AIC1750-VIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVIP	-	AIC1750-VIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVJG	-	AIC1750-VJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVJP	-	AIC1750-VJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVKG	-	AIC1750-VKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVKP	-	AIC1750-VKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BZVLG	-	AIC1750-VLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVLP	-	AIC1750-VLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVMG	-	AIC1750-VMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVMP	-	AIC1750-VMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVNG	-	AIC1750-VNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVNP	-	AIC1750-VNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVOG	-	AIC1750-VOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVOP	-	AIC1750-VOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVPG	-	AIC1750-VPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVPP	-	AIC1750-VPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVQG	-	AIC1750-VQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVQP	-	AIC1750-VQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVRG	-	AIC1750-VRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVRP	-	AIC1750-VRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVSG	-	AIC1750-VSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVSP	-	AIC1750-VSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVTG	-	AIC1750-VTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVTP	-	AIC1750-VTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVUG	-	AIC1750-VUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVUP	-	AIC1750-VUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVVG	-	AIC1750-VVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVVP	-	AIC1750-VVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVWG	-	AIC1750-VWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVWP	-	AIC1750-VWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVXG	-	AIC1750-VXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZVXP	-	AIC1750-VXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWAG	-	AIC1750-WAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWAP	-	AIC1750-WAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWBG	-	AIC1750-WBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWBP	-	AIC1750-WBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWCG	-	AIC1750-WCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWCP	-	AIC1750-WCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWDG	-	AIC1750-WDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWDP	-	AIC1750-WDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWEG	-	AIC1750-WEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWEP	-	AIC1750-WEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWFG	-	AIC1750-WFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWFP	-	AIC1750-WFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWGG	-	AIC1750-WGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWGP	-	AIC1750-WGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWHG	-	AIC1750-WHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWHP	-	AIC1750-WHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWIG	-	AIC1750-WIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWIP	-	AIC1750-WIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWJG	-	AIC1750-WJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWJP	-	AIC1750-WJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWKG	-	AIC1750-WKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWKP	-	AIC1750-WKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWLG	-	AIC1750-WLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWLP	-	AIC1750-WLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWMG	-	AIC1750-WMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWMP	-	AIC1750-WMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWNG	-	AIC1750-WNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWNP	-	AIC1750-WNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWOG	-	AIC1750-WOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWOP	-	AIC1750-WOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWPG	-	AIC1750-WPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWPP	-	AIC1750-WPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWQG	-	AIC1750-WQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWQP	-	AIC1750-WQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWRG	-	AIC1750-WRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWRP	-	AIC1750-WRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWSG	-	AIC1750-WSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWSP	-	AIC1750-WSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWTG	-	AIC1750-WTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWTP	-	AIC1750-WTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWUG	-	AIC1750-WUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWUP	-	AIC1750-WUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWVG	-	AIC1750-WVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWVP	-	AIC1750-WVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BZWWG	-	AIC1750-WWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWWP	-	AIC1750-WWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWXG	-	AIC1750-WXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZWXP	-	AIC1750-WXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXAG	-	AIC1750-XAGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXAP	-	AIC1750-XAPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXBG	-	AIC1750-XBGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXBP	-	AIC1750-XBPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXCG	-	AIC1750-XCGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXCP	-	AIC1750-XCPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXDG	-	AIC1750-XDGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXDP	-	AIC1750-XDPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXEG	-	AIC1750-XEGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXEP	-	AIC1750-XEPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXFG	-	AIC1750-XFGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXFP	-	AIC1750-XFPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXGG	-	AIC1750-XGGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXGP	-	AIC1750-XGPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXHG	-	AIC1750-XHGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXHP	-	AIC1750-XHPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXIG	-	AIC1750-XIGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXIP	-	AIC1750-XIPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXJG	-	AIC1750-XJGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXJP	-	AIC1750-XJPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXKG	-	AIC1750-XKGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXKP	-	AIC1750-XKPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXLG	-	AIC1750-XLGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXLP	-	AIC1750-XLPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXMG	-	AIC1750-XMGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXMP	-	AIC1750-XMPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXNG	-	AIC1750-XNGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXNP	-	AIC1750-XNPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXOG	-	AIC1750-XOGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXOP	-	AIC1750-XOPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXPG	-	AIC1750-XPGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXPP	-	AIC1750-XPPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXQG	-	AIC1750-XQGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXQP	-	AIC1750-XQPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXRG	-	AIC1750-XRGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXRP	-	AIC1750-XRPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXSG	-	AIC1750-XSGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXSP	-	AIC1750-XSPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXTG	-	AIC1750-XTGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXTP	-	AIC1750-XTPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXUG	-	AIC1750-XUGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXUP	-	AIC1750-XUPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXVG	-	AIC1750-XVGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXVP	-	AIC1750-XVPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXWG	-	AIC1750-XWGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXWP	-	AIC1750-XWPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXXG	-	AIC1750-XXGKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
BZXXP	-	AIC1750-XXPKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 150mA, +CE	TSOT-23-6	33yf	VR19	7b	Aic
C	-	Si1024X	n-MOSFET	Dual, Sw, 20V, 600mA, 280mW, Rds=0.41Ω(600mA), 10/36ns	SOT-563	35	T13	7d	Vs
C0	-	R1160D201A	LVR-IC	LDO, 2.0V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
C0	-	R5220D301A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=3V	SON-6	dc3	DC8	7g	Ric
C0	-	RN1901AFS	Si-npn-Digi	Dual, Sw, 50V, 80mA, 50mW, 250MHz, R1/R2=4k7/4k7	US6	33	TD3	7b	Tos
C0	-	TK65930M	Lin-IC	Fluorescent lamp driver, 97mA, 175Hz	SOP-6	33zi	-	7b	Tok
C00	-	74AHCT2G00DC	CMOS-Log	Dual 2-input NAND gates	SOT765-1	55	Log50	8d	Nxp
C00	-	74AHCT2G00DP	CMOS-Log	Dual 2-input NAND gates	SOT505-2	47	Log50	8d	Nxp
C00	-	SN74LVC2G00DCT	CMOS-Log	Dual 2-input NAND gates	SSOP-8	47	Log50	8j	Ti
C00	-	SN74LVC2G00DCU	CMOS-Log	Dual 2-input NAND gates	VSSOP-8	55	Log50	8i	Ti
C00B	-	R1173S001B	LVR-IC	LDO, Adjustable, 1A, +CE	HSOP-6J	vta	VR5	7h	Ric
C00D	-	R1173S001D	LVR-IC	LDO, Adjustable, 1A, +CE, CL	HSOP-6J	vta	VR5	7h	Ric
C01B	-	R1173S181B5	LVR-IC	LDO, 1.85V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C01C	-	R1130D001C	LVR-IC	LDO, Adjustable 1.5..5V, 300mA, -CE	HSON-6	a5	-	7ea	Ric
C01D	-	R1173S181D5	LVR-IC	LDO, 1.85V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C02	-	SN74LVC2G02DCT	CMOS-Log	Dual 2-input NOR gates	SSOP-8	47	Log53	8j	Ti
C02	-	SN74LVC2G02DCU	CMOS-Log	Dual 2-input NOR gates	VSSOP-8	55	Log53	8i	Ti
C02B	-	R1173S281B5	LVR-IC	LDO, 2.85V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C02D	-	R1173S281D5	LVR-IC	LDO, 2.85V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C04	-	74AHCT3G04DC	CMOS-Log	Triple inverters	SOT765-1	55	Log56	8d	Nxp
C04	-	74AHCT3G04DP	CMOS-Log	Triple inverters	SOT505-2	47	Log56	8d	Nxp
C04	-	SN74LVC2G04DBV	CMOS-Log	Dual inverters	SOT-23-6	33	Log24	7d	Ti
C04	-	SN74LVC3G04DCT	CMOS-Log	Triple inverters	SSOP-8	47	Log56	8j	Ti
C04	-	SN74LVC3G04DCU	CMOS-Log	Triple inverters	VSSOP-8	55	Log56	8i	Ti
C06	-	DCX123JH	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=2.2k/47k	SOT-563	35	TD2	7c	Di
C06	-	DCX123JK	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=2k2/47k	SC-74R	33	TD5	7l	Di
C06	-	DCX123JU	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2k2/47k	SOT-363	33	TD2	7l	Di
C06	-	SN74LVC2G06DBV	CMOS-Log	Dual inverter buffers/drivers (ODO)	SOT-23-6	33	Log25	7d	Ti
C06	-	SN74LVC3G06DCT	CMOS-Log	Triple inverters (ODO)	SSOP-8	47	Log72	8j	Ti
C06	-	SN74LVC3G06DCU	CMOS-Log	Triple inverters (ODO)	VSSOP-8	55	Log72	8i	Ti
C07	-	DCX143TH	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 150mW, R1=4.7k	SOT-563	35	TD2	7c	Di
C07	-	DCX143TK	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 300mW, R1=4.7k	SC-74R	33	TD5	7l	Di
C07	-	DCX143TU	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4.7k	SOT-363	33	TD2	7l	Di
C07	-	SN74LVC2G07DBV	CMOS-Log	Dual noninverting buffers/drivers (ODO)	SOT-23-6	33	Log26	7d	Ti
C07	-	SN74LVC3G07DCT	CMOS-Log	Triple noninverting buffers/drivers (ODO)	SSOP-8	47	Log73	8j	Ti
C07	-	SN74LVC3G07DCU	CMOS-Log	Triple noninverting buffers/drivers (ODO)	VSSOP-8	55	Log73	8i	Ti
C08	-	74AHCT2G08DC	CMOS-Log	Dual 2-input AND gates	SOT765-1	55	Log51	8d	Nxp
C08	-	74AHCT2G08DP	CMOS-Log	Dual 2-input AND gates	SOT505-2	47	Log51	8d	Nxp
C08	-	DCX143EH	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=4.7k/4.7k	SOT-563	35	TD2	7c	Di
C08	-	DCX143EU	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	SOT-363	33	TD2	7l	Di
C08	-	SN74LVC2G08DCT	CMOS-Log	Dual 2-input AND gates	SSOP-8	47	Log51	8j	Ti
C08	-	SN74LVC2G08DCU	CMOS-Log	Dual 2-input AND gates	VSSOP-8	55	Log51	8i	Ti
C08B	-	R1173S081B	LVR-IC	LDO, 0.8V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C08D	-	R1173S081D	LVR-IC	LDO, 0.8V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C09B	-	R1173S091B	LVR-IC	LDO, 0.9V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C09D	-	R1173S091D	LVR-IC	LDO, 0.9V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C1	-	R1160D211A	LVR-IC	LDO, 2.1V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
C1	-	R5220D311A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=3.1V	SON-6	dc3	DC8	7g	Ric
C1	-	RN1902AFS	Si-npn-Digi	Dual, Sw, 50V, 80mA, 50mW, 250MHz, R1/R2=20k/10k	US6	33	TD3	7b	Tos
C1	-	TK65931M	Lin-IC	Fluorescent lamp driver, 97mA, 200Hz	SOP-6	33zi	-	7b	Tok
C10	-	SN74LVC1G10DBV	CMOS-Log	3-input NAND gate	SOT-23-6	33	Log29	7d	Ti
C10A	-	R3132D10EA	Vdet-IC	1.0V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C10A	-	R3133D10EA	Vdet-IC	1.0V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C10B	-	R1173S101B	LVR-IC	LDO, 1.0V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C10C	-	R3132D10EC	Vdet-IC	1.0V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C10C	-	R3133D10EC	Vdet-IC	1.0V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C10D	-	R1173S101D	LVR-IC	LDO, 1.0V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C11	-	TK73211M	LVR-IC	LDO, 11V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C11A	-	R3132D11EA	Vdet-IC	1.1V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C11A	-	R3133D11EA	Vdet-IC	1.1V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C11B	-	R1173S111B	LVR-IC	LDO, 1.1V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C11C	-	R3132D11EC	Vdet-IC	1.1V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C11C	-	R3133D11EC	Vdet-IC	1.1V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C11D	-	R1173S111D	LVR-IC	LDO, 1.1V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C12	-	DCX114TH	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 150mW, R1=10k	SOT-563	35	TD2	7c	Di
C12	-	DCX114TK	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 300mW, R1=10k	SC-74R	33	TD5	7l	Di
C12	-	DCX114TU	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	SOT-363	33	TD2	7l	Di
C12A	-	R3132D12EA	Vdet-IC	1.2V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C12A	-	R3133D12EA	Vdet-IC	1.2V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C12B	-	R1173S121B	LVR-IC	LDO, 1.2V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C12C	-	R3132D12EC	Vdet-IC	1.2V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C12C	-	R3133D12EC	Vdet-IC	1.2V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C12D	-	R1173S121D	LVR-IC	LDO, 1.2V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C13	-	DCX114EH	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 150mW,R1/R2=10k/10k	SOT-563	35	TD2	7c	Di
C13	-	DCX114EK	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=10k/10k	SC-74R	33	TD5	7l	Di
C13	-	DCX114EU	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SOT-363	33	TD2	7l	Di
C13A	-	R3132D13EA	Vdet-IC	1.3V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C13A	-	R3133D13EA	Vdet-IC	1.3V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C13B	-	R1173S131B	LVR-IC	LDO, 1.3V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C13C	-	R3132D13EC	Vdet-IC	1.3V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C13C	-	R3133D13EC	Vdet-IC	1.3V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C13D	-	R1173S131D	LVR-IC	LDO, 1.3V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C14	-	74AHCT3G14DC	CMOS-Log	Triple Schmitt-trigger inverters	SOT765-1	55	Log57	8d	Nxp
C14	-	74AHCT3G14DP	CMOS-Log	Triple Schmitt-trigger inverters	SOT505-2	47	Log57	8d	Nxp
C14	-	DCX114YH	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=10/47k	SOT-563	35	TD2	7c	Di
C14	-	DCX114YK	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=10k/47k	SC-74R	33	TD5	7l	Di
C14	-	DCX114YU	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	SOT-363	33	TD2	7l	Di
C14	-	SN74LVC2G14DBV	CMOS-Log	Dual Schmitt-trigger inverter buffers	SOT-23-6	33	Log34	7d	Ti
C14	-	SN74LVC3G14DCT	CMOS-Log	Triple Schmitt-trigger inverters	SSOP-8	47	Log57	8j	Ti

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C14	-	SN74LVC3G14DCU	CMOS-Log	Triple Schmitt-trigger inverters	VSSOP-8	55	Log57	8i	Ti
C14A	-	R3132D14EA	Vdet-IC	1.4V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C14A	-	R3133D14EA	Vdet-IC	1.4V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C14B	-	R1173S141B	LVR-IC	LDO, 1.4V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C14C	-	R3132D14EC	Vdet-IC	1.4V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C14C	-	R3133D14EC	Vdet-IC	1.4V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C14D	-	R1173S141D	LVR-IC	LDO, 1.4V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C15	-	DCX115EK	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=100k/100k	SC-74R	33	TD5	7l	Di
C15A	-	R1130D151A	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C15A	-	R3132D15EA	Vdet-IC	1.5V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C15A	-	R3133D15EA	Vdet-IC	1.5V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C15B	-	R1130D151B	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C15B	-	R1173S151B	LVR-IC	LDO, 1.5V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C15C	-	R3132D15EC	Vdet-IC	1.5V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C15C	-	R3133D15EC	Vdet-IC	1.5V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C15D	-	R1173S151D	LVR-IC	LDO, 1.5V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C16A	-	R1130D161A	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C16A	-	R3132D16EA	Vdet-IC	1.6V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C16A	-	R3133D16EA	Vdet-IC	1.6V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C16B	-	R1130D161B	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C16B	-	R1173S161B	LVR-IC	LDO, 1.6V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C16C	-	R3132D16EC	Vdet-IC	1.6V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C16C	-	R3133D16EC	Vdet-IC	1.6V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C16D	-	R1173S161D	LVR-IC	LDO, 1.6V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C17	-	DCX124EH	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=22k/22k	SOT-563	35	TD2	7c	Di
C17	-	DCX124EK	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=22k/22k	SC-74R	33	TD5	7l	Di
C17	-	DCX124EU	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SOT-363	33	TD2	7l	Di
C17	-	SN74LVC2G17DBV	CMOS-Log	Dual Schmitt-trigger buffers	SOT-23-6	33	Log27	7d	Ti
C17	-	SN74LVC3G17DCT	CMOS-Log	Triple non-inverting Schmitt-trigger	SSOP-8	47	Log71	8j	Ti
C17	-	SN74LVC3G17DCU	CMOS-Log	Triple non-inverting Schmitt-trigger	VSSOP-8	55	Log71	8i	Ti
C17A	-	R1130D171A	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C17A	-	R3132D17EA	Vdet-IC	1.7V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C17A	-	R3133D17EA	Vdet-IC	1.7V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C17B	-	R1130D171B	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C17B	-	R1173S171B	LVR-IC	LDO, 1.7V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C17C	-	R3132D17EC	Vdet-IC	1.7V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C17C	-	R3133D17EC	Vdet-IC	1.7V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C17D	-	R1173S171D	LVR-IC	LDO, 1.7V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C18A	-	R1130D181A	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C18A	-	R3132D18EA	Vdet-IC	1.8V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C18A	-	R3133D18EA	Vdet-IC	1.8V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C18B	-	R1130D181B	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C18B	-	R1173S181B	LVR-IC	LDO, 1.8V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C18C	-	R3132D18EC	Vdet-IC	1.8V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C18C	-	R3133D18EC	Vdet-IC	1.8V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C18D	-	R1173S181D	LVR-IC	LDO, 1.8V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C19A	-	R1130D191A	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C19A	-	R3132D19EA	Vdet-IC	1.9V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C19A	-	R3133D19EA	Vdet-IC	1.9V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C19B	-	R1130D191B	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C19B	-	R1173S191B	LVR-IC	LDO, 1.9V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C19C	-	R3132D19EC	Vdet-IC	1.9V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C19C	-	R3133D19EC	Vdet-IC	1.9V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C19D	-	R1173S191D	LVR-IC	LDO, 1.9V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C1D	-	µPC2708T	MMIC	RF amplifier, 2.9GHz, 15dB (50Ω), Ucc=5V	SOP-6	33ab	A2	7b	Nec
C1E	-	µPC2709T	MMIC	RF amplifier, 2.3GHz, 23dB (50Ω), Ucc=5V	SOP-6	33ab	A2	7b	Nec
C1F	-	µPC2710T	MMIC	Cell-phone WB amplifier, 1GHz, Ucc=5V	SOP-6	33ab	A2	7b	Nec
C1G	-	µPC2711T	MMIC	Wide-band amplifier, 2.9GHz, Ucc=5V	SOP-6	33ab	A2	7b	Nec
C1H	-	µPC2712T	MMIC	Wide-band amplifier, 2.6GHz, Ucc=5V	SOP-6	33ab	A2	7b	Nec
C1J	-	µPC2713TB	MMIC	Wide-band LN amplifier, 1.2GHz, Ucc=5V	MSOP-6	41ab	A2	7b	Nec
C1K	-	µPC2714TB	MMIC	Wide-band amplifier, 1.8GHz, Ucc=3.4V	MSOP-6	41ab	A2	7b	Nec
C1L	-	µPC2715TB	MMIC	Wide-band amplifier, 1.2GHz, Ucc=3.4V	MSOP-6	41ab	A2	7b	Nec
C1M	-	µPC2723TB	MMIC	Differential AGC amplifier, 1.1GHz, Ucc=5V	MSOP-6	41xp	-	7b	Nec
C1P	-	µPC2726TB	MMIC	Differential WB amplifier, 1.6GHz, Ucc=5V	MSOP-6	41xo	-	7b	Nec
C1Q	-	µPC2745T	MMIC	UHF-amplifier, 2.7GHz, Ucc=3V	SOP-6	33ab	A2	7b	Nec
C1R	-	µPC2746T	MMIC	UHF-amplifier, 1.5Gz, Ucc=3V	SOP-6	33ab	A2	7b	Nec
C1S	-	µPC2747T	MMIC	UHF-amplifier, 1.8GHz, Ucc=3V	SOP-6	33ab	A2	7b	Nec
C1T	-	µPC2748T	MMIC	UHF-amplifier, 0.2..1.5GHz, Ucc=3V	SOP-6	33ab	A2	7b	Nec
C1U	-	µPC2749T	MMIC	UHF-amplifier, 2.9GHz, Ucc=3V	SOP-6	33ab	A2	7b	Nec
C1W	-	µPC2756TB	MMIC	Mix+osc. freq. downconverter, 0.1..2GHz	MSOP-6	41	-	7b	Nec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C1X	-	µPC2757T	MMIC	1..2GHz, converter, Ucc=3V	SOP-6	33	-	7b	Nec
C1Y	-	µPC2758T	MMIC	1..2GHz, converter, Ucc=3V	SOP-6	33	-	7b	Nec
C1Z	-	µPC2762TB	MMIC	UHF-amplifier, 2,9GHz, Ucc=3V	MSOP-6	41	-	7b	Nec
C2	-	R1160D221A	LVR-IC	LDO, 2.2V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
C2	-	R5220D321A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=3.2V	SON-6	dc3	DC8	7g	Ric
C2	-	RN1903AFS	Si-npn-Digi	Dual, Sw, 50V, 80mA, 50mW, 250MHz, R1/R2=22k/22k	US6	33	TD3	7b	Tos
C2	-	SN74LVC1G10DCK	CMOS-Log	3-input NAND gate	SC-70-6	33	Log29	7d	Ti
C2	-	SN74LVC2G241DCU	CMOS-Log	Dual bus buffer non-inverted with 3-state output	VSSOP-8	55	Log60	8i	Ti
C2	-	TK65932M	Lin-IC	Fluorescent lamp driver, 97mA, 225Hz	SOP-6	33zi	-	7b	Tok
C20	-	DCX144EH	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=47k/47k	SOT-563	35	TD2	7c	Di
C20	-	DCX144EK	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=47k/47k	SC-74R	33	TD5	7l	Di
C20	-	DCX144EU	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SOT-363	33	TD2	7l	Di
C20	-	TK73220M	LVR-IC	LDO, 2.0V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C20A	-	R1130D201A	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C20A	-	R3132D20EA	Vdet-IC	2.0V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C20A	-	R3133D20EA	Vdet-IC	2.0V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C20B	-	R1130D201B	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C20B	-	R1173S201B	LVR-IC	LDO, 2.0V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C20C	-	R3132D20EC	Vdet-IC	2.0V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C20C	-	R3133D20EC	Vdet-IC	2.0V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C20D	-	R1173S201D	LVR-IC	LDO, 2.0V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C21	-	TK73221M	LVR-IC	LDO, 2.1V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C21A	-	R1130D211A	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C21A	-	R3132D21EA	Vdet-IC	2.1V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C21A	-	R3133D21EA	Vdet-IC	2.1V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C21B	-	R1130D211B	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C21B	-	R1173S211B	LVR-IC	LDO, 2.1V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C21C	-	R3132D21EC	Vdet-IC	2.1V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C21C	-	R3133D21EC	Vdet-IC	2.1V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C21D	-	R1173S211D	LVR-IC	LDO, 2.1V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C22	-	TK73222M	LVR-IC	LDO, 2.2V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C22A	-	R1130D221A	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C22A	-	R3132D22EA	Vdet-IC	2.2V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C22A	-	R3133D22EA	Vdet-IC	2.2V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C22B	-	R1130D221B	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C22B	-	R1173S221B	LVR-IC	LDO, 2.2V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C22C	-	R3132D22EC	Vdet-IC	2.2V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C22C	-	R3133D22EC	Vdet-IC	2.2V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C22D	-	R1173S221D	LVR-IC	LDO, 2.2V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C23	-	TK73223M	LVR-IC	LDO, 2.3V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C23A	-	R1130D231A	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C23A	-	R3132D23EA	Vdet-IC	2.3V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C23A	-	R3133D23EA	Vdet-IC	2.3V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C23B	-	R1130D231B	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C23B	-	R1173S231B	LVR-IC	LDO, 2.3V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C23C	-	R3132D23EC	Vdet-IC	2.3V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C23C	-	R3133D23EC	Vdet-IC	2.3V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C23D	-	R1173S231D	LVR-IC	LDO, 2.3V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C24	-	TK73224M	LVR-IC	LDO, 2.4V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C241	-	74AHCT2G241DP	CMOS-Log	Dual bus buffer non-inverted with 3-state output	SOT505-2	47	Log60	8d	Nxp
C24A	-	R1130D241A	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C24A	-	R3132D24EA	Vdet-IC	2.4V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C24A	-	R3133D24EA	Vdet-IC	2.4V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C24B	-	R1130D241B	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C24B	-	R1173S241B	LVR-IC	LDO, 2.4V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C24C	-	R3132D24EC	Vdet-IC	2.4V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C24C	-	R3133D24EC	Vdet-IC	2.4V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C24D	-	R1173S241D	LVR-IC	LDO, 2.4V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C25	-	74AHCT2G125DC	CMOS-Log	Dual bus buffer with 3-state output	SOT765-1	55	Log54	8d	Nxp
C25	-	74AHCT2G125DP	CMOS-Log	Dual bus buffer with 3-state output	SOT505-2	47	Log54	8d	Nxp
C25	-	SN74LVC2G125DCT	CMOS-Log	Dual bus buffer with 3-state output	SSOP-8	47	Log54	8j	Ti
C25	-	SN74LVC2G125DCU	CMOS-Log	Dual bus buffer with 3-state output	VSSOP-8	55	Log54	8i	Ti
C25	-	TK73225M	LVR-IC	LDO, 2.5V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C25A	-	R1130D251A	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C25A	-	R3132D25EA	Vdet-IC	2.5V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C25A	-	R3133D25EA	Vdet-IC	2.5V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C25B	-	R1130D251B	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C25B	-	R1173S251B	LVR-IC	LDO, 2.5V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C25C	-	R3132D25EC	Vdet-IC	2.5V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C25C	-	R3133D25EC	Vdet-IC	2.5V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C25D	-	R1173S251D	LVR-IC	LDO, 2.5V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C26	-	74AHCT2G126DC	CMOS-Log	Dual bus buffer with 3-state output	SOT765-1	55	Log55	8d	Nxp
C26	-	74AHCT2G126DP	CMOS-Log	Dual bus buffer with 3-state output	SOT505-2	47	Log55	8d	Nxp
C26	-	SN74LVC2G126DCT	CMOS-Log	Bus buffer gate with 3-state output	SSOP-8	47	Log13	8j	Ti
C26	-	TK73226M	LVR-IC	LDO, 2.6V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C26A	-	R1130D261A	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C26A	-	R3132D26EA	Vdet-IC	2.6V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C26A	-	R3133D26EA	Vdet-IC	2.6V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C26B	-	R1130D261B	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C26B	-	R1173S261B	LVR-IC	LDO, 2.6V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C26C	-	R3132D26EC	Vdet-IC	2.6V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C26C	-	R3133D26EC	Vdet-IC	2.6V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C26D	-	R1173S261D	LVR-IC	LDO, 2.6V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C27	-	SN74LVC1G27DBV	CMOS-Log	3-input NOR gate	SOT-23-6	33	Log31	7d	Ti
C27	-	TK73227M	LVR-IC	LDO, 2.7V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C27A	-	R1130D271A	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C27A	-	R3132D27EA	Vdet-IC	2.7V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C27A	-	R3133D27EA	Vdet-IC	2.7V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C27B	-	R1130D271B	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C27B	-	R1173S271B	LVR-IC	LDO, 2.7V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C27C	-	R3132D27EC	Vdet-IC	2.7V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C27C	-	R3133D27EC	Vdet-IC	2.7V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C27D	-	R1173S271D	LVR-IC	LDO, 2.7V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C28	-	TK73228M	LVR-IC	LDO, 2.8V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C28A	-	R1130D281A	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C28A	-	R3132D28EA	Vdet-IC	2.8V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C28A	-	R3133D28EA	Vdet-IC	2.8V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C28B	-	R1130D281B	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C28B	-	R1173S281B	LVR-IC	LDO, 2.8V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C28C	-	R3132D28EC	Vdet-IC	2.8V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C28C	-	R3133D28EC	Vdet-IC	2.8V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C28D	-	R1173S281D	LVR-IC	LDO, 2.8V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C29	-	TK73229M	LVR-IC	LDO, 2.9V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C29A	-	R1130D291A	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C29A	-	R3132D29EA	Vdet-IC	2.9V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C29A	-	R3133D29EA	Vdet-IC	2.9V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C29B	-	R1130D291B	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C29B	-	R1173S291B	LVR-IC	LDO, 2.9V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C29C	-	R3132D29EC	Vdet-IC	2.9V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C29C	-	R3133D29EC	Vdet-IC	2.9V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C29D	-	R1173S291D	LVR-IC	LDO, 2.9V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C2A	-	µPC2763TB	MMIC	UHF-amplifier, 2,4GHz, Ucc=3V	MSOP-6	41	-	7b	Nec
C2B	-	µPC8102T	MMIC	Telecom, pager, 150..330MHz amp.	SOP-6	33	-	7b	Nec
C2C	-	µPC8103T	MMIC	Telecom, pager, 150..330MHz mixer	SOP-6	33	-	7b	Nec
C2D	-	µPC8106T	MMIC	Cordless phone, Up-Conv., Ucc=3V	SOP-6	33	-	7b	Nec
C2F	-	µPC8108T	MMIC	Telecom, pager, 150..930MHz mixer	SOP-6	33	-	7b	Nec
C2G	-	µPC8109T	MMIC	Cordless phone, Up-conv., Ucc=3V	SOP-6	33	-	7b	Nec
C2H	-	µPC2771TB	MMIC	UHF-amplifier, 2,2GHz, Ucc=3V	MSOP-6	41	-	7b	Nec
C2K	-	µPC8112T	MMIC	Cordless phone, Down-conv., Ucc=3V	SOP-6	33	-	7b	Nec
C2L	-	µPC2776TB	MMIC	UHF-amplifier, 2,7GHz, Ucc=3V	MSOP-6	41	-	7b	Nec
C2M	-	µPC8119T	MMIC	Digital phone, AGC (down), Ucc=3V	SOP-6	33	-	7b	Nec
C2N	-	MAX9722AEUE	Lin-IC	AF PA, 2.4..5.5V, 2x125mW(3V/32Ω), shutdown	TSSOP-16	60	-	8d	Max
C2P	-	µPC8128T	MMIC	Cell/cordl-ph. buff-amp, Ucc=2.4..3.6V, 800..1900MHz	SOP-6	33ab	A2	7b	Nec
C2S	-	µPC2791TB	MMIC	BS tuner IF system, Ucc=5V	MSOP-6	41	-	7b	Nec
C2T	-	µPC2792TB	MMIC	BS tuner IF system, Ucc=5V	MSOP-6	41	-	7b	Nec
C2U	-	µPC8151T	MMIC	Cell/cordl-ph. buff-amp, Ucc=2.4..3.6V, 800..1900MHz	SOP-6	33ab	A2	7b	Nec
C2V	-	µPC8152T	MMIC	Cell/cordl-ph. buff-amp, Ucc=2.4..3.6V, 800..1900MHz	SOP-6	33ab	A2	7b	Nec
C3	-	R1160D231A	LVR-IC	LDO, 2.3V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
C3	-	R5220D331A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=3.3V	SON-6	dc3	DC8	7g	Ric
C3	-	RN1904AFS	Si-npn-Digi	Dual, Sw, 50V, 80mA, 50mW, 250MHz, R1/R2=47k/47k	US6	33	TD3	7b	Tos
C3	-	TK65933M	Lin-IC	Fluorescent lamp driver, 97mA, 250Hz	SOP-6	33zi	-	7b	Tok
C30	-	TK73230M	LVR-IC	LDO, 3.0V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C30A	-	R1130D301A	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C30A	-	R3132D30EA	Vdet-IC	3.0V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C30A	-	R3133D30EA	Vdet-IC	3.0V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C30B	-	R1130D301B	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C30B	-	R1173S301B	LVR-IC	LDO, 3.0V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C30C	-	R3132D30EC	Vdet-IC	3.0V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C30C	-	R3133D30EC	Vdet-IC	3.0V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C30D	-	R1173S301D	LVR-IC	LDO, 3.0V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C31	-	TK73231M	LVR-IC	LDO, 3.1V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C31A	-	R1130D311A	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C31A	-	R3132D31EA	Vdet-IC	3.1V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C31A	-	R3133D31EA	Vdet-IC	3.1V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C31B	-	R1130D311B	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C31B	-	R1173S311B	LVR-IC	LDO, 3.1V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C31C	-	R3132D31EC	Vdet-IC	3.1V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C31C	-	R3133D31EC	Vdet-IC	3.1V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C31D	-	R1173S311D	LVR-IC	LDO, 3.1V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C32	-	74AHCT2G32DC	CMOS-Log	Dual 2-input OR gates	SOT765-1	55	Log52	8d	Nxp
C32	-	74AHCT2G32DP	CMOS-Log	Dual 2-input OR gates	SOT505-2	47	Log52	8d	Nxp
C32	-	SN74LVC2G32DCT	CMOS-Log	Dual 2-input OR gates	SSOP-8	47	Log52	8j	Ti
C32	-	SN74LVC2G32DCU	CMOS-Log	Dual 2-input OR gates	VSSOP-8	55	Log52	8i	Ti
C32	-	TK73232M	LVR-IC	LDO, 3.2V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C32A	-	R1130D321A	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C32A	-	R3132D32EA	Vdet-IC	3.2V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C32A	-	R3133D32EA	Vdet-IC	3.2V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C32B	-	R1130D321B	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C32B	-	R1173S321B	LVR-IC	LDO, 3.2V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C32C	-	R3132D32EC	Vdet-IC	3.2V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C32C	-	R3133D32EC	Vdet-IC	3.2V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C32D	-	R1173S321D	LVR-IC	LDO, 3.2V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C33	-	TK73233M	LVR-IC	LDO, 3.3V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C33A	-	R1130D331A	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C33A	-	R3132D33EA	Vdet-IC	3.3V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C33A	-	R3133D33EA	Vdet-IC	3.3V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C33B	-	R1130D331B	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C33B	-	R1173S331B	LVR-IC	LDO, 3.3V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C33C	-	R3132D33EC	Vdet-IC	3.3V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C33C	-	R3133D33EC	Vdet-IC	3.3V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C33D	-	R1173S331D	LVR-IC	LDO, 3.3V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C34	-	SN74LVC2G34DBV	CMOS-Log	Dual non-inverter buffers	SOT-23-6	33	Log23	7d	Ti
C34	-	SN74LVC3G34DCT	CMOS-Log	Triple non-inverter buffers	SSOP-8	47	Log69	8j	Ti
C34	-	SN74LVC3G34DCU	CMOS-Log	Triple non-inverter buffers	VSSOP-8	55	Log69	8i	Ti
C34	-	TK73234M	LVR-IC	LDO, 3.4V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C34A	-	R1130D341A	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C34A	-	R3132D34EA	Vdet-IC	3.4V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C34A	-	R3133D34EA	Vdet-IC	3.4V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C34B	-	R1130D341B	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C34B	-	R1173S341B	LVR-IC	LDO, 3.4V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C34C	-	R3132D34EC	Vdet-IC	3.4V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C34C	-	R3133D34EC	Vdet-IC	3.4V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C34D	-	R1173S341D	LVR-IC	LDO, 3.4V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C35	-	TK73235M	LVR-IC	LDO, 3.5V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C35A	-	R1130D351A	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C35A	-	R3132D35EA	Vdet-IC	3.5V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C35A	-	R3133D35EA	Vdet-IC	3.5V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C35B	-	R1130D351B	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C35B	-	R1173S351B	LVR-IC	LDO, 3.5V±2%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
C35C	-	R3132D35EC	Vdet-IC	3.5V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C35C	-	R3133D35EC	Vdet-IC	3.5V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C35D	-	R1173S351D	LVR-IC	LDO, 3.5V±2%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
C36	-	TK73236M	LVR-IC	LDO, 3.6V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C36A	-	R1130D361A	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C36A	-	R3132D36EA	Vdet-IC	3.6V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C36A	-	R3133D36EA	Vdet-IC	3.6V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C36B	-	R1130D361B	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C36C	-	R3132D36EC	Vdet-IC	3.6V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C36C	-	R3133D36EC	Vdet-IC	3.6V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C37	-	TK73237M	LVR-IC	LDO, 3.7V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C37A	-	R1130D371A	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C37A	-	R3132D37EA	Vdet-IC	3.7V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C37A	-	R3133D37EA	Vdet-IC	3.7V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C37B	-	R1130D371B	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C37C	-	R3132D37EC	Vdet-IC	3.7V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C37C	-	R3133D37EC	Vdet-IC	3.7V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C38	-	SN74LVC2G38DCT	CMOS-Log	Dual 2-input NAND gate (ODO)	SSOP-8	47	Log62	8j	Ti
C38	-	SN74LVC2G38DCU	CMOS-Log	Dual 2-input NAND gate (ODO)	VSSOP-8	55	Log62	8i	Ti
C38	-	TK73238M	LVR-IC	LDO, 3.8V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C38A	-	R1130D381A	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C38A	-	R3132D38EA	Vdet-IC	3.8V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C38A	-	R3133D38EA	Vdet-IC	3.8V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C38B	-	R1130D381B	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C38C	-	R3132D38EC	Vdet-IC	3.8V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C38C	-	R3133D38EC	Vdet-IC	3.8V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C39	-	TK73239M	LVR-IC	LDO, 3.9V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C39A	-	R1130D391A	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C39A	-	R3132D39EA	Vdet-IC	3.9V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C39A	-	R3133D39EA	Vdet-IC	3.9V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C39B	-	R1130D391B	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C39C	-	R3132D39EC	Vdet-IC	3.9V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C39C	-	R3133D39EC	Vdet-IC	3.9V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C3B	-	SN74LVC2G132DCT	CMOS-Log	Dual 2-input NOR gates with Schmitt-trigger inputs	SSOP-8	47	Log49	8j	Ti
C3B	-	SN74LVC2G132DCU	CMOS-Log	Dual 2-input NOR gates with Schmitt-trigger inputs	VSSOP-8	55	Log49	8i	Ti
C4	-	R1160D241A	LVR-IC	LDO, 2.4V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
C4	-	RN1905AFS	Si-npn-Digi	Dual, Sw, 50V, 80mA, 50mW, 250MHz, R1/R2=2k2/47k	US6	33	TD3	7b	Tos
C4	-	TK65934M	Lin-IC	Fluorescent lamp driver, 97mA, 275Hz	SOP-6	33zi	-	7b	Tok
C40	-	SN74LVC2G240DCT	CMOS-Log	Dual bus buffer inverted with 3-state output	SSOP-8	47	Log67	8j	Ti
C40	-	SN74LVC2G240DCU	CMOS-Log	Dual bus buffer inverted with 3-state output	VSSOP-8	55	Log67	8i	Ti
C40	-	TK73240M	LVR-IC	LDO, 4.0V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C40A	-	R1130D401A	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C40A	-	R3132D40EA	Vdet-IC	4.0V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C40A	-	R3133D40EA	Vdet-IC	4.0V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C40B	-	R1130D401B	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C40C	-	R3132D40EC	Vdet-IC	4.0V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C40C	-	R3133D40EC	Vdet-IC	4.0V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C41	-	74AHCT2G241DC	CMOS-Log	Dual bus buffer non-inverted with 3-state output	SOT765-1	55	Log60	8d	Nxp
C41	-	SN74LVC2G241DCT	CMOS-Log	Dual bus buffer non-inverted with 3-state output	SSOP-8	47	Log60	8j	Ti
C41	-	TK73241M	LVR-IC	LDO, 4.1V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C41A	-	R1130D411A	LVR-IC	LDO, 4.1V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C41A	-	R3132D41EA	Vdet-IC	4.1V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C41A	-	R3133D41EA	Vdet-IC	4.1V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C41B	-	R1130D411B	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C41C	-	R3132D41EC	Vdet-IC	4.1V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C41C	-	R3133D41EC	Vdet-IC	4.1V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C42	-	OPA2342EA	Op-IC	Dual, lo-power, Rail-to-Rail, 2.5..5.5V, 1MHz, 1V/µs	MSOP-8	47opd	OP4	8d	Bb
C42	-	TK73242M	LVR-IC	LDO, 4.2V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C42A	-	R1130D421A	LVR-IC	LDO, 4.2V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C42A	-	R3132D42EA	Vdet-IC	4.2V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C42A	-	R3133D42EA	Vdet-IC	4.2V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C42B	-	R1130D421B	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C42C	-	R3132D42EC	Vdet-IC	4.2V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C42C	-	R3133D42EC	Vdet-IC	4.2V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C43	-	OPA343EA	Op-IC	Dual, single-supply, Rail-to-Rail, 2.5..5.5V, 5.5MHz, 6V/µs	MSOP-8	47opd	OP4	8d	Bb
C43	-	TK73243M	LVR-IC	LDO, 4.3V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C43A	-	R1130D431A	LVR-IC	LDO, 4.3V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C43A	-	R3132D43EA	Vdet-IC	4.3V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C43A	-	R3133D43EA	Vdet-IC	4.3V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C43B	-	R1130D431B	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C43C	-	R3132D43EC	Vdet-IC	4.3V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C43C	-	R3133D43EC	Vdet-IC	4.3V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C44	-	TK73244M	LVR-IC	LDO, 4.4V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C44A	-	R1130D441A	LVR-IC	LDO, 4.4V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C44A	-	R3132D44EA	Vdet-IC	4.4V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C44A	-	R3133D44EA	Vdet-IC	4.4V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C44B	-	R1130D441B	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C44C	-	R3132D44EC	Vdet-IC	4.4V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C44C	-	R3133D44EC	Vdet-IC	4.4V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C45	-	TK73245M	LVR-IC	LDO, 4.5V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C45A	-	R1130D451A	LVR-IC	LDO, 4.5V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C45A	-	R3132D45EA	Vdet-IC	4.5V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C45A	-	R3133D45EA	Vdet-IC	4.5V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C45B	-	R1130D451B	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C45C	-	R3132D45EC	Vdet-IC	4.5V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C45C	-	R3133D45EC	Vdet-IC	4.5V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C46	-	TK73246M	LVR-IC	LDO, 4.6V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C46A	-	R1130D461A	LVR-IC	LDO, 4.6V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C46A	-	R3132D46EA	Vdet-IC	4.6V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C46A	-	R3133D46EA	Vdet-IC	4.6V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C46B	-	R1130D461B	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C46C	-	R3132D46EC	Vdet-IC	4.6V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C46C	-	R3133D46EC	Vdet-IC	4.6V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C47	-	TK73247M	LVR-IC	LDO, 4.7V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C47A	-	R1130D471A	LVR-IC	LDO, 4.7V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C47A	-	R3132D47EA	Vdet-IC	4.7V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C47A	-	R3133D47EA	Vdet-IC	4.7V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C47B	-	R1130D471B	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C47C	-	R3132D47EC	Vdet-IC	4.7V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C47C	-	R3133D47EC	Vdet-IC	4.7V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C48	-	TK73248M	LVR-IC	LDO, 4.8V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C48A	-	R1130D481A	LVR-IC	LDO, 4.8V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C48A	-	R3132D48EA	Vdet-IC	4.8V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C48A	-	R3133D48EA	Vdet-IC	4.8V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C48B	-	R1130D481B	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C48C	-	R3132D48EC	Vdet-IC	4.8V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C48C	-	R3133D48EC	Vdet-IC	4.8V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C49	-	TK73249M	LVR-IC	LDO, 4.9V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C49A	-	R1130D491A	LVR-IC	LDO, 4.9V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C49A	-	R3132D49EA	Vdet-IC	4.9V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C49A	-	R3133D49EA	Vdet-IC	4.9V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C49B	-	R1130D491B	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C49C	-	R3132D49EC	Vdet-IC	4.9V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C49C	-	R3133D49EC	Vdet-IC	4.9V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C4A	-	S-812C20BPI-C4ATFG	LVR-IC	2.0V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4B	-	S-812C21BPI-C4BTFG	LVR-IC	2.1V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4C	-	S-812C22BPI-C4CTFG	LVR-IC	2.2V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4D	-	S-812C23BPI-C4DTFG	LVR-IC	2.3V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4E	-	S-812C24BPI-C4ETFG	LVR-IC	2.4V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4F	-	S-812C25BPI-C4FTFG	LVR-IC	2.5V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4G	-	S-812C26BPI-C4GTFG	LVR-IC	2.6V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4H	-	S-812C27BPI-C4HTFG	LVR-IC	2.7V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4I	-	S-812C28BPI-C4ITFG	LVR-IC	2.8V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4J	-	S-812C29BPI-C4JTFG	LVR-IC	2.9V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4K	-	S-812C30BPI-C4KTFG	LVR-IC	3.0V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4L	-	S-812C31BPI-C4LTFG	LVR-IC	3.1V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4M	-	S-812C32BPI-C4MTFG	LVR-IC	3.2V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4N	-	S-812C33BPI-C4NTFG	LVR-IC	3.3V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4O	-	S-812C34BPI-C4OTFG	LVR-IC	3.4V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4P	-	S-812C35BPI-C4PTFG	LVR-IC	3.5V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4Q	-	MAX9722BEUE	Lin-IC	AF PA, 2.4..5.5V, 2x125mW(3V/32Ω), shutdown	TSSOP-16	60	-	8d	Max
C4Q	-	S-812C36BPI-C4QTFG	LVR-IC	3.6V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4R	-	S-812C37BPI-C4RTFG	LVR-IC	3.7V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4S	-	S-812C38BPI-C4STFG	LVR-IC	3.8V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4T	-	S-812C39BPI-C4TTFG	LVR-IC	3.9V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4U	-	S-812C40BPI-C4UTFG	LVR-IC	4.0V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4V	-	S-812C41BPI-C4VTFG	LVR-IC	4.1V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4W	-	S-812C42BPI-C4WTFG	LVR-IC	4.2V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4X	-	S-812C43BPI-C4XTFG	LVR-IC	4.3V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4Y	-	S-812C44BPI-C4YTFG	LVR-IC	4.4V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C4Z	-	S-812C45BPI-C4ZTFG	LVR-IC	4.5V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C5	-	LM4665MM	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 1W(5V/8Ω), shutdown	SOP-10	60	AFP5	8d	Nsc
C5	-	R1160D251A	LVR-IC	LDO, 2.5V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
C5	-	RN1906AFS	Si-npn-Digi	Dual, Sw, 50V, 80mA, 50mW, 250MHz, R1/R2=4k7/47k	US6	33	TD3	7b	Tos
C5	-	TK65935M	Lin-IC	Fluorescent lamp driver, 97mA, 300Hz	SOP-6	33zi	-	7b	Tok
C50	-	TK73250M	LVR-IC	LDO, 5.0V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C50A	-	R1130D501A	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	HSON-6	vq	VR4	7ea	Ric
C50A	-	R3132D50EA	Vdet-IC	5.0V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C50A	-	R3133D50EA	Vdet-IC	5.0V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C50B	-	R1130D501B	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	HSON-6	vq	VR4	7ea	Ric
C50C	-	R3132D50EC	Vdet-IC	5.0V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C50C	-	R3133D50EC	Vdet-IC	5.0V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C53	-	SN74LVC2G53DCT	CMOS-Log	2-channel analog multiplexer/demultiplexer	SSOP-8	47	Log58	8j	Ti
C53	-	SN74LVC2G53DCU	CMOS-Log	2-channel analog multiplexer/demultiplexer	VSSOP-8	55	Log58	8i	Ti
C55	-	TK73255M	LVR-IC	LDO, 5.5V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C57	-	SN74LVC2G157DCT	CMOS-Log	2-input multiplexer	SSOP-8	47	Log66	8j	Ti
C57	-	SN74LVC2G157DCU	CMOS-Log	2-input multiplexer	VSSOP-8	55	Log66	8i	Ti
C5A	-	S-812C46BPI-C5ATFG	LVR-IC	4.6V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C5B	-	S-812C47BPI-C5BTFG	LVR-IC	4.7V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C5C	-	S-812C48BPI-C5CTFG	LVR-IC	4.8V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C5D	-	S-812C49BPI-C5DTFG	LVR-IC	4.9V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C5E	-	S-812C50BPI-C5ETFG	LVR-IC	5.0V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C5F	-	S-812C51BPI-C5FTFG	LVR-IC	5.1V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C5G	-	S-812C52BPI-C5GTFG	LVR-IC	5.2V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C5H	-	S-812C53BPI-C5HTFG	LVR-IC	5.3V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C5I	-	S-812C54BPI-C5ITFG	LVR-IC	5.4V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C5J	-	S-812C55BPI-C5JTFG	LVR-IC	5.5V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C5K	-	S-812C56BPI-C5KTFG	LVR-IC	5.6V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C5L	-	S-812C57BPI-C5LTFG	LVR-IC	5.7V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C5M	-	S-812C58BPI-C5MTFG	LVR-IC	5.8V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C5N	-	S-812C59BPI-C5NTFG	LVR-IC	5.9V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C5O	-	S-812C60BPI-C5OTFG	LVR-IC	6.0V±2%, 50mA, +CE	SNT-6A	35rx	VR4	7g	Sii
C6	-	R1160D261A	LVR-IC	LDO, 2.6V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
C6	-	RN1907AFS	Si-npn-Digi	Dual, Sw, 50V, 80mA, 50mW, 250MHz, R1/R2=10k/47k	FS6	35	TD3	7b	Tos
C6	-	TK65936M	Lin-IC	Fluorescent lamp driver, 97mA, 325Hz	SOP-6	33zi	-	7b	Tok
C60A	-	R3132D23EA2	Vdet-IC	2.32V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C60A	-	R3133D23EA2	Vdet-IC	2.32V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C60C	-	R3132D23EC2	Vdet-IC	2.32V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C60C	-	R3133D23EC2	Vdet-IC	2.32V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C61A	-	R3132D26EA3	Vdet-IC	2.63V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C61A	-	R3133D26EA3	Vdet-IC	2.63V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C61C	-	R3132D26EC3	Vdet-IC	2.63V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C61C	-	R3133D26EC3	Vdet-IC	2.63V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C62A	-	R3132D29EA3	Vdet-IC	2.93V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C62A	-	R3133D29EA3	Vdet-IC	2.93V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C62C	-	R3132D29EC3	Vdet-IC	2.93V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C62C	-	R3133D29EC3	Vdet-IC	2.93V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C63A	-	R3132D30EA8	Vdet-IC	3.08V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C63A	-	R3133D30EA8	Vdet-IC	3.08V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C63C	-	R3132D30EC8	Vdet-IC	3.08V±1.5%, -Reset PPO, -MR	SON1612-6	vkb	VD5	7e	Ric
C63C	-	R3133D30EC8	Vdet-IC	3.08V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C64A	-	R3132D43EA8	Vdet-IC	4.38V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C64A	-	R3133D43EA8	Vdet-IC	4.38V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C64C	-	R3132D43EC8	Vdet-IC	4.38V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C64C	-	R3133D43EC8	Vdet-IC	4.38V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C65A	-	R3132D46EA3	Vdet-IC	4.63V±1.5%, -Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C65A	-	R3133D46EA3	Vdet-IC	4.63V±1.5%, +Reset ODO, -MR	SON1612-6	vkb	VD5	7e	Ric
C65C	-	R3132D46EC3	Vdet-IC	4.63V±1.5%, -Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C65C	-	R3133D46EC3	Vdet-IC	4.63V±1.5%, +Reset PPO, -MR	SON1612-6	35vkb	VD4	7e	Ric
C66	-	SN74LVC2G66DCT	CMOS-Log	2-channel analog switch	SSOP-8	47	Log68	8j	Ti
C66	-	SN74LVC2G66DCU	CMOS-Log	2-channel analog switch	VSSOP-8	55	Log68	8i	Ti
C7	-	R1160D271A	LVR-IC	LDO, 2.7V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
C7	-	RN1908AFS	Si-npn-Digi	Dual, Sw, 50V, 80mA, 50mW, 250MHz, R1/R2=22k/47k	FS6	35	TD3	7b	Tos
C7	-	SN74LVC2G17DCK	CMOS-Log	Dual Schmitt-trigger buffers	SC-70-6	33	Log27	7d	Ti
C7	-	TK65937M	Lin-IC	Fluorescent lamp driver, 97mA, 350Hz	SOP-6	33zi	-	7b	Tok
C70	-	TK73270M	LVR-IC	LDO, 7.0V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C8	-	R1160D281A	LVR-IC	LDO, 2.8V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
C8	-	RN1909AFS	Si-npn-Digi	Dual, Sw, 50V, 80mA, 50mW, 250MHz, R1/R2=47k/22k	FS6	35	TD3	7b	Tos
C8	-	TK65938M	Lin-IC	Fluorescent lamp driver, 97mA, 375Hz	SOP-6	33zi	-	7b	Tok
C80	-	TK73280M	LVR-IC	LDO, 8.0V±2%, 100mA, +CE, Ext. transistor	SOT-23L-8	47	-	8d	Tok
C81	-	DCX122LH	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=0.22k/10k	SOT-563	35	TD2	7c	Di
C81	-	DCX122LU	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=0.22k/10k	SOT-363	33	TD2	7l	Di
C82	-	DCX142JH	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=0.47k/10k	SOT-563	35	TD2	7c	Di
C82	-	DCX142JU	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=0.47k/10k	SOT-363	33	TD2	7l	Di
C83	-	DCX122TH	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 150mW, R1=0.22k	SOT-563	35	TD2	7c	Di
C83	-	DCX122TU	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=0.22k	SOT-363	33	TD2	7l	Di
C84	-	DCX142TH	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 150mW, R1=0.47k	SOT-563	35	TD2	7c	Di
C84	-	DCX142TU	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=0.47k	SOT-363	33	TD2	7l	Di
C9	-	R1160D291A	LVR-IC	LDO, 2.9V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
C9	-	RN1910AFS	Si-npn-Digi	Dual, Sw, 50V, 80mA, 50mW, 250MHz, R1=4k7	FS6	35	TD3	7b	Tos
C9	-	SN74LVC2G34DCK	CMOS-Log	Dual non-inverter buffers	SC-70-6	33	Log23	7d	Ti
C9	-	SN74LVC2G34DRL	CMOS-Log	Dual non-inverter buffers	SOT-563-6	35	Log23	7d	Ti
C9	-	TK65939M	Lin-IC	Fluorescent lamp driver, 97mA, 400Hz	SOP-6	33zi	-	7b	Tok
CA	-	R5220D101A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1V	SON-6	dc3	DC8	7g	Ric
CA	-	RP152N001A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CA3	-	SN74LVC1G373DBV	CMOS-Log	D-type transparent latch with 3-state output	SOT-23-6	33	Log35	7d	Ti
CB	-	BH15MA3WHFV	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	HVSOF6	34vr5	VR7	7i	Rhm
CB	-	R5220D111A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.1V	SON-6	dc3	DC8	7g	Ric
CB	-	RP152N002A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CC	-	BH18MA3WHFV	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	HVSOF6	34vr5	VR7	7i	Rhm
CC	-	R5220D121A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.2V	SON-6	dc3	DC8	7g	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CC	-	RP152N003A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CC	-	SN74LVC2G04DRL	CMOS-Log	Dual inverters	SOT-563-6	35	Log24	7d	Ti
CD	-	BH25MA3WHFV	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	HVSOF6	34vr5	VR7	7i	Rhm
CD	-	R5220D131A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.3V	SON-6	dc3	DC8	7g	Ric
CD	-	RP152N004A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CD	-	SN74LVC2GU04DCK	CMOS-Log	Dual inverters	SC-70-6	55	Log24	7d	Ti
CD2	-	BAS40CDWGP	Si-diode	Quad, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-363	33	D7	7b	Chm
CD3	-	BAS70CDWGP	Si-diode	Quad, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33	D7	7b	Chm
CD6	-	CIMD6A	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 350mW, 250MHz, R1=4.7k	SOT-26R	33	TD2	7d	Cen
CDA1	-	CMEDA-6i	Si-diode	Quad, Sw, 60V, 250mA, 350mW, Vf<1V(10mA), <3pF	SOT-28	47	-	7j	Cen
CE	-	BH28MA3WHFV	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	HVSOF6	34vr5	VR7	7i	Rhm
CE	-	R5220D141A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.4V	SON-6	dc3	DC8	7g	Ric
CE	-	RP152N005A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CF	-	AAT3221IJS-1.5	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky
CF	-	BH29MA3WHFV	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	HVSOF6	34vr5	VR7	7i	Rhm
CF	-	R5220D151A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.5V	SON-6	dc3	DC8	7g	Ric
CF	-	RN1911AFS	Si-npn-Digi	Dual, Sw, 50V, 80mA, 50mW, 250MHz, R1=10k	FS6	35	TD3	7b	Tos
CF	-	RP152N006A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CF	-	SN74LVC2G14DCK	CMOS-Log	Dual Schmitt-trigger inverter buffers	SC-70-6	33	Log34	7d	Ti
CG	-	AAT3221IJS-1.9	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky
CG	-	BH30MA3WHFV	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	HVSOF6	34vr5	VR7	7i	Rhm
CG	-	R5220D161A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.6V	SON-6	dc3	DC8	7g	Ric
CG	-	RP152N007A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CH	-	BH31MA3WHFV	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	HVSOF6	34vr5	VR7	7i	Rhm
CH	-	R5220D171A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.7V	SON-6	dc3	DC8	7g	Ric
CH	-	RP152N008A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CJ	-	BH33MA3WHFV	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	HVSOF6	34vr5	VR7	7i	Rhm
CJ	-	R5220D181A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.8V	SON-6	dc3	DC8	7g	Ric
CJ	-	RP152N009A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CK	-	HSMS-282K	Si-diode	Dual, Schottky, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-363	33dw	-	7b	Agi
CK	-	R5220D191A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.9V	SON-6	dc3	DC8	7g	Ric
CK	-	RP152N010A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CL	-	HSMS-282L	Si-diode	Triple, Schottky, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-363	33dd	-	7b	Agi
CL	-	R5220D201A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2V	SON-6	dc3	DC8	7g	Ric
CL	-	RP152N011A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CM	-	R5220D211A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.1V	SON-6	dc3	DC8	7g	Ric
CM	-	RP152N012A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CN	-	MCP73826-4.1	BM-IC	Li-Ion, charge management, Vcc=4.1V±1%	SOT-23-6	33yh	VBM2	7d	Mcc
CN	-	R5220D221A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.2V	SON-6	dc3	DC8	7g	Ric
CN	-	RP152N013A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CN	-	SN74LVC2G126DCU	CMOS-Log	Bus buffer gate with 3-state output	VSSOP-8	55	Log13	8i	Ti
CP	-	HSMS-282P	Si-diode	Quad, Schottky, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-363	33bx	-	7b	Agi
CP	-	MCP73826-4.2	BM-IC	Li-Ion, charge management, Vcc=4.2V±1%	SOT-23-6	33yh	VBM2	7d	Mcc
CP	-	R5220D231A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.3V	SON-6	dc3	DC8	7g	Ric
CP	-	RP152N014A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CQ	-	R5220D241A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.4V	SON-6	dc3	DC8	7g	Ric
CQ	-	RP152N015A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CR	-	R5220D251A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.5V	SON-6	dc3	DC8	7g	Ric
CR	-	RP152N016A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CS	-	R5220D261A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.6V	SON-6	dc3	DC8	7g	Ric
CS	-	RP152N017A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CT	-	R5220D271A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.7V	SON-6	dc3	DC8	7g	Ric
CT	-	RP152N018A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CT	-	SN74LVC2G06DCK	CMOS-Log	Dual inverter buffers/drivers (ODO)	SC-70-6	33	Log25	7d	Ti
CU	-	R5220D281A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.8V	SON-6	dc3	DC8	7g	Ric
CU	-	RP152N019A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CU	-	SN74LVC1G27DCK	CMOS-Log	3-input NOR gate	SC-70-6	33	Log31	7d	Ti
CU4	-	SN74LVC2GU04DBV	CMOS-Log	Dual inverters	SOT-23-6	33	Log24	7d	Ti
CU4	-	SN74LVC3GU04DCT	CMOS-Log	Triple inverters	SSOP-8	47	Log56	8j	Ti
CU4	-	SN74LVC3GU04DCU	CMOS-Log	Triple inverters	VSSOP-8	55	Log56	8i	Ti
CV	-	R5220D291A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.9V	SON-6	dc3	DC8	7g	Ric
CV	-	RP152N020A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CV	-	SN74LVC2G07DCK	CMOS-Log	Dual noninverting buffers/drivers (ODO)	SC-70-6	33	Log26	7d	Ti
CW	-	R5220D012A	DC-DC-IC	PWM step-down, +CE, Vdc=1.2V, Vldo=1.1V	SON-6	dc3	DC8	7g	Ric
CW	-	RP152N021A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CW3	-	CMLZDA2V4	Z-diode	Dual, 2.2..2.6V, Zzt<100Ω, 63mA, 250mW	SOT-563	35ed	-	7c	Cen
CW4	-	CMLZDA2V7	Z-diode	Dual, 2.5..2.9V, Zzt<100Ω, 57mA, 250mW	SOT-563	35ed	-	7c	Cen
CW5	-	CMLZDA3V0	Z-diode	Dual, 2.8..3.2V, Zzt<95Ω, 54mA, 250mW	SOT-563	35ed	-	7c	Cen
CW6	-	CMLZDA3V3	Z-diode	Dual, 3.1..3.5V, Zzt<95Ω, 47mA, 250mW	SOT-563	35ed	-	7c	Cen
CW7	-	CMLZDA3V6	Z-diode	Dual, 3.4..3.8V, Zzt<95Ω, 45mA, 250mW	SOT-563	35ed	-	7c	Cen

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CW8	-	CMLZDA3V9	Z-diode	Dual, 3.7..4.1V, Zzt<90Ω, 43mA, 250mW	SOT-563	35ed	-	7c	Cen
CW9	-	CMLZDA4V3	Z-diode	Dual, 4.0..4.6V, Zzt<90Ω, 40mA, 250mW	SOT-563	35ed	-	7c	Cen
CX	-	R5220D022A	DC-DC-IC	PWM step-down, +CE, Vdc=1.5V, Vldo=1.1V	SON-6	dc3	DC8	7g	Ric
CX	-	RP152N022A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CY	-	R5220D032A	DC-DC-IC	PWM step-down, +CE, Vdc=1.3V, Vldo=1.05V	SON-6	dc3	DC8	7g	Ric
CY	-	RP152N023A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CY1	-	CMLZDA11V	Z-diode	Dual, 10.4..11.6V, Zzt<20Ω, 15mA, 250mW	SOT-563	35ed	-	7c	Cen
CY2	-	CMLZDA12V	Z-diode	Dual, 11.4..12.7V, Zzt<25Ω, 13mA, 250mW	SOT-563	35ed	-	7c	Cen
CY3	-	CMLZDA13V	Z-diode	Dual, 12.4..14.1V, Zzt<30Ω, 12mA, 250mW	SOT-563	35ed	-	7c	Cen
CY4	-	CMLZDA15V	Z-diode	Dual, 13.8..15.6V, Zzt<30Ω, 11mA, 250mW	SOT-563	35ed	-	7c	Cen
CY5	-	CMLZDA16V	Z-diode	Dual, 15.3..17.1V, Zzt<40Ω, 10mA, 250mW	SOT-563	35ed	-	7c	Cen
CY6	-	CMLZDA18V	Z-diode	Dual, 16.8..19.1V, Zzt<45Ω, 9.2mA, 250mW	SOT-563	35ed	-	7c	Cen
CY7	-	CMLZDA20V	Z-diode	Dual, 18.8..21.2V, Zzt<55Ω, 8.3mA, 250mW	SOT-563	35ed	-	7c	Cen
CY8	-	CMLZDA22V	Z-diode	Dual, 20.8..23.3V, Zzt<55Ω, 7.6mA, 250mW	SOT-563	35ed	-	7c	Cen
CY9	-	CMLZDA24V	Z-diode	Dual, 22.8..25.6V, Zzt<70Ω, 7.0mA, 250mW	SOT-563	35ed	-	7c	Cen
CYA	-	CMLZDA27V	Z-diode	Dual, 25.1..28.9V, Zzt<80Ω, 6.2mA, 250mW	SOT-563	35ed	-	7c	Cen
CYB	-	CMLZDA30V	Z-diode	Dual, 28.0..32.0V, Zzt<80Ω, 5.6mA, 250mW	SOT-563	35ed	-	7c	Cen
CYC	-	CMLZDA33V	Z-diode	Dual, 31.0..35.0V, Zzt<80Ω, 5.0mA, 250mW	SOT-563	35ed	-	7c	Cen
CYD	-	CMLZDA36V	Z-diode	Dual, 34.0..38.0V, Zzt<90Ω, 4.6mA, 250mW	SOT-563	35ed	-	7c	Cen
CYE	-	CMLZDA39V	Z-diode	Dual, 37.0..41.0V, Zzt<130Ω, 4.3mA, 250mW	SOT-563	35ed	-	7c	Cen
CYF	-	CMLZDA43V	Z-diode	Dual, 40.0..46.0V, Zzt<150Ω, 3.9mA, 250mW	SOT-563	35ed	-	7c	Cen
CYH	-	CMLZDA47V	Z-diode	Dual, 44.0..50.0V, Zzt<170Ω, 3.5mA, 250mW	SOT-563	35ed	-	7c	Cen
CZ	-	R5220D042A	DC-DC-IC	PWM step-down, +CE, Vdc=1.3V, Vldo=1.1V	SON-6	dc3	DC8	7g	Ric
CZ	-	RP152N024A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
CZ1	-	CMLZDA4V7	Z-diode	Dual, 4.4..5.0V, Zzt<80Ω, 38mA, 250mW	SOT-563	35ed	-	7c	Cen
CZ2	-	CMLZDA5V1	Z-diode	Dual, 4.8..5.4V, Zzt<60Ω, 35mA, 250mW	SOT-563	35ed	-	7c	Cen
CZ3	-	CMLZDA5V6	Z-diode	Dual, 5.2..6.0V, Zzt<40Ω, 32mA, 250mW	SOT-563	35ed	-	7c	Cen
CZ4	-	CMLZDA6V2	Z-diode	Dual, 5.8..6.6V, Zzt<10Ω, 28mA, 250mW	SOT-563	35ed	-	7c	Cen
CZ5	-	CMLZDA6V8	Z-diode	Dual, 6.5..7.2V, Zzt<15Ω, 25mA, 250mW	SOT-563	35ed	-	7c	Cen
CZ6	-	CMLZDA7V5	Z-diode	Dual, 7.0..7.9V, Zzt<15Ω, 23mA, 250mW	SOT-563	35ed	-	7c	Cen
CZ7	-	CMLZDA8V2	Z-diode	Dual, 7.7..8.7V, Zzt<15Ω, 21mA, 250mW	SOT-563	35ed	-	7c	Cen
CZ8	-	CMLZDA9V1	Z-diode	Dual, 8.5..9.6V, Zzt<15Ω, 18mA, 250mW	SOT-563	35ed	-	7c	Cen
CZ9	-	CMLZDA10V	Z-diode	Dual, 9.4..10.6V, Zzt<20Ω, 16mA, 250mW	SOT-563	35ed	-	7c	Cen
D0	-	R1160D301A	LVR-IC	LDO, 3.0V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
D0	-	R5220D301B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=3V	SON-6	dc3	DC8	7g	Ric
D0	-	RN2901AFS	Si-pnp-Digi	Dual, Sw, 50V, 80mA, 50mW, R1/R2=4.7k/4.7k	FS6	35	TD4	7b	Tos
D01A	-	R1171S181A5	LVR-IC	LDO, 1.85V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D01B	-	R1171S181B5	LVR-IC	LDO, 1.85V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D02A	-	R1171S281A5	LVR-IC	LDO, 2.85V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D02B	-	R1171S281B5	LVR-IC	LDO, 2.85V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D0808X	-	VRD0808LNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0808X	-	VRD0808LTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0809X	-	VRD0809LNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0809X	-	VRD0809LTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D080JX	-	VRD080JLNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D080JX	-	VRD080JLTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D080KX	-	VRD080KLNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D080KX	-	VRD080KLTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0810X	-	VRD0810LNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0810X	-	VRD0810LTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0811X	-	VRD0811LNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0811X	-	VRD0811LTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0812X	-	VRD0812LNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0812X	-	VRD0812LTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0813X	-	VRD0813LNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0813X	-	VRD0813LTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0814X	-	VRD0814LNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0814X	-	VRD0814LTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0815X	-	VRD0815LNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0815X	-	VRD0815LTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0816X	-	VRD0816LNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0816X	-	VRD0816LTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0817X	-	VRD0817LNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0817X	-	VRD0817LTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0818X	-	VRD0818LNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0818X	-	VRD0818LTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0819X	-	VRD0819LNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0819X	-	VRD0819LTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D081AX	-	VRD081ALNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D081AX	-	VRD081ALTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D081BX	-	VRD081BLNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D081BX	-	VRD081BLTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D081CX	-	VRD081CLNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D081CX	-	VRD081CLTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D081DX	-	VRD081DLNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D081DX	-	VRD081DLTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D081EX	-	VRD081ELNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D081EX	-	VRD081ELTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D081FX	-	VRD081FLNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D081FX	-	VRD081FLTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D081GX	-	VRD081GLNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D081GX	-	VRD081GLTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D081HX	-	VRD081HLNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D081HX	-	VRD081HLTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D081JX	-	VRD081JLNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D081JX	-	VRD081JLTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D081KX	-	VRD081KMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D081KX	-	VRD081KMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0820X	-	VRD0820MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0820X	-	VRD0820MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0821X	-	VRD0821MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0821X	-	VRD0821MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0822X	-	VRD0822MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0822X	-	VRD0822MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0823X	-	VRD0823MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0823X	-	VRD0823MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0824X	-	VRD0824MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0824X	-	VRD0824MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0825X	-	VRD0825MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0825X	-	VRD0825MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0826X	-	VRD0826MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0826X	-	VRD0826MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0827X	-	VRD0827MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0827X	-	VRD0827MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0828X	-	VRD0828MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0828X	-	VRD0828MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0829X	-	VRD0829MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0829X	-	VRD0829MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D082AX	-	VRD082AMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D082AX	-	VRD082AMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D082BX	-	VRD082BMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D082BX	-	VRD082BMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D082CX	-	VRD082CMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D082CX	-	VRD082CMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D082DX	-	VRD082DMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D082DX	-	VRD082DMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D082EX	-	VRD082EMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D082EX	-	VRD082EMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D082FX	-	VRD082FMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D082FX	-	VRD082FMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D082GX	-	VRD082GMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D082GX	-	VRD082GMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D082HX	-	VRD082HMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D082HX	-	VRD082HMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D082JX	-	VRD082JMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D082JX	-	VRD082JMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D082KX	-	VRD082KMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D082KX	-	VRD082KMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0830X	-	VRD0830MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0830X	-	VRD0830MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0831X	-	VRD0831MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0831X	-	VRD0831MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0832X	-	VRD0832MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0832X	-	VRD0832MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0833X	-	VRD0833MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0833X	-	VRD0833MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0834X	-	VRD0834MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0834X	-	VRD0834MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0835X	-	VRD0835MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0835X	-	VRD0835MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D0836X	-	VRD0836MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0836X	-	VRD0836MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0837X	-	VRD0837MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0837X	-	VRD0837MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0838X	-	VRD0838MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0838X	-	VRD0838MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0839X	-	VRD0839MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0839X	-	VRD0839MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D083AX	-	VRD083AMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D083AX	-	VRD083AMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D083BX	-	VRD083BMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D083BX	-	VRD083BMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D083CX	-	VRD083CMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D083CX	-	VRD083CMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D083DX	-	VRD083DMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D083DX	-	VRD083DMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D083EX	-	VRD083EMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D083EX	-	VRD083EMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D083FX	-	VRD083FMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D083FX	-	VRD083FMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D083GX	-	VRD083GMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D083GX	-	VRD083GMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D083HX	-	VRD083HMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D083HX	-	VRD083HMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D083JX	-	VRD083JMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D083JX	-	VRD083JMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D083KX	-	VRD083KMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D083KX	-	VRD083KMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0840X	-	VRD0840MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0840X	-	VRD0840MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0841X	-	VRD0841MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0841X	-	VRD0841MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0842X	-	VRD0842MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0842X	-	VRD0842MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0843X	-	VRD0843MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0843X	-	VRD0843MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0844X	-	VRD0844MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0844X	-	VRD0844MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0845X	-	VRD0845MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0845X	-	VRD0845MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0846X	-	VRD0846MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0846X	-	VRD0846MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0847X	-	VRD0847MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0847X	-	VRD0847MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0848X	-	VRD0848MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0848X	-	VRD0848MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0849X	-	VRD0849MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0849X	-	VRD0849MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D084AX	-	VRD084AMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D084AX	-	VRD084AMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D084BX	-	VRD084BMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D084BX	-	VRD084BMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D084CX	-	VRD084CMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D084CX	-	VRD084CMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D084DX	-	VRD084DMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D084DX	-	VRD084DMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D084EX	-	VRD084EMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D084EX	-	VRD084EMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D084FX	-	VRD084FMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D084FX	-	VRD084FMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D084GX	-	VRD084GMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D084GX	-	VRD084GMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D084HX	-	VRD084HMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D084HX	-	VRD084HMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D084JX	-	VRD084JMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D084JX	-	VRD084JMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D084KX	-	VRD084KMNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D084KX	-	VRD084KMTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0850X	-	VRD0850MNX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0850X	-	VRD0850MTX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D0908X	-	VRD0908LNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0908X	-	VRD0908LTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0909X	-	VRD0909LNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0909X	-	VRD0909LTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D090JX	-	VRD090JLNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D090JX	-	VRD090JLTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D090KX	-	VRD090KLNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D090KX	-	VRD090KLTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0910X	-	VRD0910LNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0910X	-	VRD0910LTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0911X	-	VRD0911LNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0911X	-	VRD0911LTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0912X	-	VRD0912LNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0912X	-	VRD0912LTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0913X	-	VRD0913LNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0913X	-	VRD0913LTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0914X	-	VRD0914LNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0914X	-	VRD0914LTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0915X	-	VRD0915LNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0915X	-	VRD0915LTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0916X	-	VRD0916LNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0916X	-	VRD0916LTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0917X	-	VRD0917LNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0917X	-	VRD0917LTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0918X	-	VRD0918LNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0918X	-	VRD0918LTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0919X	-	VRD0919LNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0919X	-	VRD0919LTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D091AX	-	VRD091ALNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D091AX	-	VRD091ALTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D091BX	-	VRD091BLNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D091BX	-	VRD091BLTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D091CX	-	VRD091CLNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D091CX	-	VRD091CLTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D091DX	-	VRD091DLNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D091DX	-	VRD091DLTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D091EX	-	VRD091ELNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D091EX	-	VRD091ELTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D091FX	-	VRD091FLNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D091FX	-	VRD091FLTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D091GX	-	VRD091GLNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D091GX	-	VRD091GLTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D091HX	-	VRD091HLNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D091HX	-	VRD091HLTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D091JX	-	VRD091JLNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D091JX	-	VRD091JLTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D091KX	-	VRD091KMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D091KX	-	VRD091KMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0920X	-	VRD0920MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0920X	-	VRD0920MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0921X	-	VRD0921MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0921X	-	VRD0921MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0922X	-	VRD0922MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0922X	-	VRD0922MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0923X	-	VRD0923MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0923X	-	VRD0923MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0924X	-	VRD0924MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0924X	-	VRD0924MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0925X	-	VRD0925MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0925X	-	VRD0925MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0926X	-	VRD0926MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0926X	-	VRD0926MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0927X	-	VRD0927MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0927X	-	VRD0927MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0928X	-	VRD0928MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0928X	-	VRD0928MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0929X	-	VRD0929MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0929X	-	VRD0929MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D092AX	-	VRD092AMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D092AX	-	VRD092AMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D092BX	-	VRD092BMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D092BX	-	VRD092BMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D092CX	-	VRD092CMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D092CX	-	VRD092CMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D092DX	-	VRD092DMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D092DX	-	VRD092DMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D092EX	-	VRD092EMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D092EX	-	VRD092EMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D092FX	-	VRD092FMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D092FX	-	VRD092FMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D092GX	-	VRD092GMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D092GX	-	VRD092GMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D092HX	-	VRD092HMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D092HX	-	VRD092HMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D092JX	-	VRD092JMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D092JX	-	VRD092JMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D092KX	-	VRD092KMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D092KX	-	VRD092KMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0930X	-	VRD0930MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0930X	-	VRD0930MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0931X	-	VRD0931MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0931X	-	VRD0931MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0932X	-	VRD0932MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0932X	-	VRD0932MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0933X	-	VRD0933MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0933X	-	VRD0933MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0934X	-	VRD0934MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0934X	-	VRD0934MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0935X	-	VRD0935MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0935X	-	VRD0935MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0936X	-	VRD0936MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0936X	-	VRD0936MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0937X	-	VRD0937MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0937X	-	VRD0937MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0938X	-	VRD0938MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0938X	-	VRD0938MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0939X	-	VRD0939MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0939X	-	VRD0939MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D093AX	-	VRD093AMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D093AX	-	VRD093AMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D093BX	-	VRD093BMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D093BX	-	VRD093BMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D093CX	-	VRD093CMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D093CX	-	VRD093CMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D093DX	-	VRD093DMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D093DX	-	VRD093DMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D093EX	-	VRD093EMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D093EX	-	VRD093EMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D093FX	-	VRD093FMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D093FX	-	VRD093FMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D093GX	-	VRD093GMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D093GX	-	VRD093GMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D093HX	-	VRD093HMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D093HX	-	VRD093HMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D093JX	-	VRD093JMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D093JX	-	VRD093JMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D093KX	-	VRD093KMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D093KX	-	VRD093KMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0940X	-	VRD0940MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0940X	-	VRD0940MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0941X	-	VRD0941MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0941X	-	VRD0941MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0942X	-	VRD0942MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0942X	-	VRD0942MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0943X	-	VRD0943MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0943X	-	VRD0943MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0944X	-	VRD0944MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0944X	-	VRD0944MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0945X	-	VRD0945MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0945X	-	VRD0945MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D0946X	-	VRD0946MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0946X	-	VRD0946MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0947X	-	VRD0947MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0947X	-	VRD0947MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0948X	-	VRD0948MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0948X	-	VRD0948MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0949X	-	VRD0949MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0949X	-	VRD0949MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D094AX	-	VRD094AMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D094AX	-	VRD094AMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D094BX	-	VRD094BMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D094BX	-	VRD094BMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D094CX	-	VRD094CMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D094CX	-	VRD094CMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D094DX	-	VRD094DMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D094DX	-	VRD094DMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D094EX	-	VRD094EMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D094EX	-	VRD094EMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D094FX	-	VRD094FMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D094FX	-	VRD094FMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D094GX	-	VRD094GMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D094GX	-	VRD094GMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D094HX	-	VRD094HMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D094HX	-	VRD094HMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D094JX	-	VRD094JMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D094JX	-	VRD094JMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D094KX	-	VRD094KMNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D094KX	-	VRD094KMTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0950X	-	VRD0950MNX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0950X	-	VRD0950MTX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J08X	-	VRD0J08LNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J08X	-	VRD0J08LTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J09X	-	VRD0J09LNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J09X	-	VRD0J09LTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J0JX	-	VRD0J0JLNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J0JX	-	VRD0J0JLTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J0KX	-	VRD0J0KLNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J0KX	-	VRD0J0KLTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J10X	-	VRD0J10LNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J10X	-	VRD0J10LTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J11X	-	VRD0J11LNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J11X	-	VRD0J11LTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J12X	-	VRD0J12LNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J12X	-	VRD0J12LTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J13X	-	VRD0J13LNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J13X	-	VRD0J13LTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J14X	-	VRD0J14LNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J14X	-	VRD0J14LTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J15X	-	VRD0J15LNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J15X	-	VRD0J15LTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J16X	-	VRD0J16LNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J16X	-	VRD0J16LTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J17X	-	VRD0J17LNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J17X	-	VRD0J17LTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J18X	-	VRD0J18LNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J18X	-	VRD0J18LTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J19X	-	VRD0J19LNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J19X	-	VRD0J19LTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J1AX	-	VRD0J1ALNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J1AX	-	VRD0J1ALTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J1BX	-	VRD0J1BLNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J1BX	-	VRD0J1BLTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J1CX	-	VRD0J1CLNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J1CX	-	VRD0J1CLTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J1DX	-	VRD0J1DLNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J1DX	-	VRD0J1DLTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J1EX	-	VRD0J1ELNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J1EX	-	VRD0J1ELTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J1FX	-	VRD0J1FLNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J1FX	-	VRD0J1FLTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D0J1GX	-	VRD0J1GLNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J1GX	-	VRD0J1GLTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J1HX	-	VRD0J1HLNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J1HX	-	VRD0J1HLTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J1JX	-	VRD0J1JLNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J1JX	-	VRD0J1JLTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J1KX	-	VRD0J1KMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J1KX	-	VRD0J1KMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J20X	-	VRD0J20MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J20X	-	VRD0J20MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J21X	-	VRD0J21MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J21X	-	VRD0J21MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J22X	-	VRD0J22MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J22X	-	VRD0J22MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J23X	-	VRD0J23MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J23X	-	VRD0J23MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J24X	-	VRD0J24MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J24X	-	VRD0J24MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J25X	-	VRD0J25MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J25X	-	VRD0J25MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J26X	-	VRD0J26MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J26X	-	VRD0J26MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J27X	-	VRD0J27MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J27X	-	VRD0J27MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J28X	-	VRD0J28MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J28X	-	VRD0J28MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J29X	-	VRD0J29MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J29X	-	VRD0J29MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J2AX	-	VRD0J2AMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J2AX	-	VRD0J2AMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J2BX	-	VRD0J2BMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J2BX	-	VRD0J2BMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J2CX	-	VRD0J2CMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J2CX	-	VRD0J2CMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J2DX	-	VRD0J2DMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J2DX	-	VRD0J2DMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J2EX	-	VRD0J2EMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J2EX	-	VRD0J2EMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J2FX	-	VRD0J2FMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J2FX	-	VRD0J2FMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J2GX	-	VRD0J2GMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J2GX	-	VRD0J2GMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J2HX	-	VRD0J2HMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J2HX	-	VRD0J2HMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J2JX	-	VRD0J2JMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J2JX	-	VRD0J2JMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J2KX	-	VRD0J2KMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J2KX	-	VRD0J2KMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J30X	-	VRD0J30MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J30X	-	VRD0J30MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J31X	-	VRD0J31MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J31X	-	VRD0J31MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J32X	-	VRD0J32MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J32X	-	VRD0J32MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J33X	-	VRD0J33MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J33X	-	VRD0J33MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J34X	-	VRD0J34MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J34X	-	VRD0J34MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J35X	-	VRD0J35MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J35X	-	VRD0J35MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J36X	-	VRD0J36MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J36X	-	VRD0J36MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J37X	-	VRD0J37MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J37X	-	VRD0J37MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J38X	-	VRD0J38MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J38X	-	VRD0J38MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J39X	-	VRD0J39MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J39X	-	VRD0J39MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J3AX	-	VRD0J3AMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J3AX	-	VRD0J3AMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D0J3BX	-	VRD0J3BMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J3BX	-	VRD0J3BMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J3CX	-	VRD0J3CMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J3CX	-	VRD0J3CMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J3DX	-	VRD0J3DMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J3DX	-	VRD0J3DMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J3EX	-	VRD0J3EMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J3EX	-	VRD0J3EMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J3FX	-	VRD0J3FMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J3FX	-	VRD0J3FMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J3GX	-	VRD0J3GMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J3GX	-	VRD0J3GMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J3HX	-	VRD0J3HMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J3HX	-	VRD0J3HMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J3JX	-	VRD0J3JMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J3JX	-	VRD0J3JMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J3KX	-	VRD0J3KMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J3KX	-	VRD0J3KMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J40X	-	VRD0J40MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J40X	-	VRD0J40MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J41X	-	VRD0J41MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J41X	-	VRD0J41MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J42X	-	VRD0J42MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J42X	-	VRD0J42MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J43X	-	VRD0J43MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J43X	-	VRD0J43MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J44X	-	VRD0J44MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J44X	-	VRD0J44MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J45X	-	VRD0J45MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J45X	-	VRD0J45MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J46X	-	VRD0J46MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J46X	-	VRD0J46MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J47X	-	VRD0J47MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J47X	-	VRD0J47MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J48X	-	VRD0J48MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J48X	-	VRD0J48MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J49X	-	VRD0J49MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J49X	-	VRD0J49MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J4AX	-	VRD0J4AMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J4AX	-	VRD0J4AMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J4BX	-	VRD0J4BMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J4BX	-	VRD0J4BMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J4CX	-	VRD0J4CMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J4CX	-	VRD0J4CMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J4DX	-	VRD0J4DMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J4DX	-	VRD0J4DMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J4EX	-	VRD0J4EMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J4EX	-	VRD0J4EMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J4FX	-	VRD0J4FMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J4FX	-	VRD0J4FMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J4GX	-	VRD0J4GMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J4GX	-	VRD0J4GMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J4HX	-	VRD0J4HMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J4HX	-	VRD0J4HMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J4JX	-	VRD0J4JMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J4JX	-	VRD0J4JMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J4KX	-	VRD0J4KMNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J4KX	-	VRD0J4KMTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0J50X	-	VRD0J50MNX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0J50X	-	VRD0J50MTX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K08X	-	VRD0K08LNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K08X	-	VRD0K08LTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K09X	-	VRD0K09LNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K09X	-	VRD0K09LTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K0JX	-	VRD0K0JLNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K0JX	-	VRD0K0JLTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K0KX	-	VRD0K0KLNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K0KX	-	VRD0K0KLTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K10X	-	VRD0K10LNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K10X	-	VRD0K10LTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D0K11X	-	VRD0K11LNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K11X	-	VRD0K11LTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K12X	-	VRD0K12LNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K12X	-	VRD0K12LTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K13X	-	VRD0K13LNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K13X	-	VRD0K13LTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K14X	-	VRD0K14LNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K14X	-	VRD0K14LTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K15X	-	VRD0K15LNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K15X	-	VRD0K15LTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K16X	-	VRD0K16LNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K16X	-	VRD0K16LTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K17X	-	VRD0K17LNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K17X	-	VRD0K17LTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K18X	-	VRD0K18LNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K18X	-	VRD0K18LTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K19X	-	VRD0K19LNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K19X	-	VRD0K19LTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K1AX	-	VRD0K1ALNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K1AX	-	VRD0K1ALTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K1BX	-	VRD0K1BLNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K1BX	-	VRD0K1BLTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K1CX	-	VRD0K1CLNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K1CX	-	VRD0K1CLTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K1DX	-	VRD0K1DLNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K1DX	-	VRD0K1DLTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K1EX	-	VRD0K1ELNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K1EX	-	VRD0K1ELTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K1FX	-	VRD0K1FLNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K1FX	-	VRD0K1FLTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K1GX	-	VRD0K1GLNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K1GX	-	VRD0K1GLTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K1HX	-	VRD0K1HLNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K1HX	-	VRD0K1HLTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K1JX	-	VRD0K1JLNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K1JX	-	VRD0K1JLTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K1KX	-	VRD0K1KMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K1KX	-	VRD0K1KMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K20X	-	VRD0K20MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K20X	-	VRD0K20MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K21X	-	VRD0K21MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K21X	-	VRD0K21MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K22X	-	VRD0K22MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K22X	-	VRD0K22MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K23X	-	VRD0K23MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K23X	-	VRD0K23MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K24X	-	VRD0K24MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K24X	-	VRD0K24MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K25X	-	VRD0K25MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K25X	-	VRD0K25MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K26X	-	VRD0K26MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K26X	-	VRD0K26MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K27X	-	VRD0K27MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K27X	-	VRD0K27MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K28X	-	VRD0K28MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K28X	-	VRD0K28MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K29X	-	VRD0K29MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K29X	-	VRD0K29MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K2AX	-	VRD0K2AMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K2AX	-	VRD0K2AMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K2BX	-	VRD0K2BMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K2BX	-	VRD0K2BMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K2CX	-	VRD0K2CMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K2CX	-	VRD0K2CMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K2DX	-	VRD0K2DMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K2DX	-	VRD0K2DMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K2EX	-	VRD0K2EMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K2EX	-	VRD0K2EMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K2FX	-	VRD0K2FMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K2FX	-	VRD0K2FMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D0K2GX	-	VRD0K2GMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K2GX	-	VRD0K2GMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K2HX	-	VRD0K2HMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K2HX	-	VRD0K2HMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K2JX	-	VRD0K2JMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K2JX	-	VRD0K2JMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K2KX	-	VRD0K2KMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K2KX	-	VRD0K2KMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K30X	-	VRD0K30MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K30X	-	VRD0K30MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K31X	-	VRD0K31MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K31X	-	VRD0K31MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K32X	-	VRD0K32MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K32X	-	VRD0K32MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K33X	-	VRD0K33MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K33X	-	VRD0K33MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K34X	-	VRD0K34MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K34X	-	VRD0K34MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K35X	-	VRD0K35MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K35X	-	VRD0K35MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K36X	-	VRD0K36MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K36X	-	VRD0K36MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K37X	-	VRD0K37MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K37X	-	VRD0K37MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K38X	-	VRD0K38MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K38X	-	VRD0K38MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K39X	-	VRD0K39MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K39X	-	VRD0K39MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K3AX	-	VRD0K3AMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K3AX	-	VRD0K3AMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K3BX	-	VRD0K3BMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K3BX	-	VRD0K3BMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K3CX	-	VRD0K3CMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K3CX	-	VRD0K3CMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K3DX	-	VRD0K3DMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K3DX	-	VRD0K3DMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K3EX	-	VRD0K3EMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K3EX	-	VRD0K3EMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K3FX	-	VRD0K3FMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K3FX	-	VRD0K3FMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K3GX	-	VRD0K3GMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K3GX	-	VRD0K3GMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K3HX	-	VRD0K3HMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K3HX	-	VRD0K3HMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K3JX	-	VRD0K3JMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K3JX	-	VRD0K3JMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K3KX	-	VRD0K3KMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K3KX	-	VRD0K3KMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K40X	-	VRD0K40MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K40X	-	VRD0K40MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K41X	-	VRD0K41MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K41X	-	VRD0K41MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K42X	-	VRD0K42MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K42X	-	VRD0K42MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K43X	-	VRD0K43MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K43X	-	VRD0K43MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K44X	-	VRD0K44MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K44X	-	VRD0K44MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K45X	-	VRD0K45MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K45X	-	VRD0K45MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K46X	-	VRD0K46MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K46X	-	VRD0K46MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K47X	-	VRD0K47MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K47X	-	VRD0K47MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K48X	-	VRD0K48MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K48X	-	VRD0K48MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K49X	-	VRD0K49MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K49X	-	VRD0K49MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K4AX	-	VRD0K4AMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K4AX	-	VRD0K4AMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D0K4BX	-	VRD0K4BMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K4BX	-	VRD0K4BMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K4CX	-	VRD0K4CMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K4CX	-	VRD0K4CMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K4DX	-	VRD0K4DMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K4DX	-	VRD0K4DMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K4EX	-	VRD0K4EMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K4EX	-	VRD0K4EMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K4FX	-	VRD0K4FMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K4FX	-	VRD0K4FMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K4GX	-	VRD0K4GMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K4GX	-	VRD0K4GMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K4HX	-	VRD0K4HMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K4HX	-	VRD0K4HMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K4JX	-	VRD0K4JMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K4JX	-	VRD0K4JMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K4KX	-	VRD0K4KMNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K4KX	-	VRD0K4KMTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D0K50X	-	VRD0K50MNX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D0K50X	-	VRD0K50MTX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1	-	IMD1A	Si-n/p-Digi	Sw, 50V, 100mA, 250MHz, R1=22k	SOT-23-6	33	TD2	7b	Rhm
D1	-	PMBT3904D	Si-npn	Dual, Sw, 60V, 100mA, 150mW, B=100..300, >300MHz	SC-74	33	T8	7b	Phi
D1	-	R1160D311A	LVR-IC	LDO, 3.1V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
D1	-	R5220D311B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=3.1V	SON-6	dc3	DC8	7g	Ric
D1	-	RN2902AFS	Si-pnp-Digi	Dual, Sw, 50V, 80mA, 50mW, R1/R2=10k/10k	FS6	35	TD4	7b	Tos
D10	-	IMD10A	Si-n/p-Digi	Sw, 50V, 300mW, 500mA(p), 100mA(n), n:R1=10k; p:R1/R2=100R/10k	SOT-23-6	33	TD2	7b	Rhm
D1008X	-	VRD1008LNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1008X	-	VRD1008LTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1009X	-	VRD1009LNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1009X	-	VRD1009LTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D100JX	-	VRD100JLNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D100JX	-	VRD100JLTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D100KX	-	VRD100KLNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D100KX	-	VRD100KLTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1010X	-	VRD1010LNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1010X	-	VRD1010LTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1011X	-	VRD1011LNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1011X	-	VRD1011LTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1012X	-	VRD1012LNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1012X	-	VRD1012LTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1013X	-	VRD1013LNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1013X	-	VRD1013LTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1014X	-	VRD1014LNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1014X	-	VRD1014LTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1015X	-	VRD1015LNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1015X	-	VRD1015LTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1016X	-	VRD1016LNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1016X	-	VRD1016LTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1017X	-	VRD1017LNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1017X	-	VRD1017LTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1018X	-	VRD1018LNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1018X	-	VRD1018LTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1019X	-	VRD1019LNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1019X	-	VRD1019LTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D101AX	-	VRD101ALNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D101AX	-	VRD101ALTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D101BX	-	VRD101BLNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D101BX	-	VRD101BLTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D101CX	-	VRD101CLNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D101CX	-	VRD101CLTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D101DX	-	VRD101DLNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D101DX	-	VRD101DLTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D101EX	-	VRD101ELNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D101EX	-	VRD101ELTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D101FX	-	VRD101FLNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D101FX	-	VRD101FLTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D101GX	-	VRD101GLNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D101GX	-	VRD101GLTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D101HX	-	VRD101HLNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D101HX	-	VRD101HLTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D101JX	-	VRD101JLNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D101JX	-	VRD101JLTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D101KX	-	VRD101KMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D101KX	-	VRD101KMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1020X	-	VRD1020MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1020X	-	VRD1020MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1021X	-	VRD1021MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1021X	-	VRD1021MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1022X	-	VRD1022MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1022X	-	VRD1022MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1023X	-	VRD1023MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1023X	-	VRD1023MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1024X	-	VRD1024MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1024X	-	VRD1024MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1025X	-	VRD1025MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1025X	-	VRD1025MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1026X	-	VRD1026MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1026X	-	VRD1026MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1027X	-	VRD1027MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1027X	-	VRD1027MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1028X	-	VRD1028MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1028X	-	VRD1028MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1029X	-	VRD1029MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1029X	-	VRD1029MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D102AX	-	VRD102AMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D102AX	-	VRD102AMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D102BX	-	VRD102BMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D102BX	-	VRD102BMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D102CX	-	VRD102CMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D102CX	-	VRD102CMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D102DX	-	VRD102DMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D102DX	-	VRD102DMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D102EX	-	VRD102EMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D102EX	-	VRD102EMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D102FX	-	VRD102FMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D102FX	-	VRD102FMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D102GX	-	VRD102GMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D102GX	-	VRD102GMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D102HX	-	VRD102HMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D102HX	-	VRD102HMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D102JX	-	VRD102JMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D102JX	-	VRD102JMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D102KX	-	VRD102KMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D102KX	-	VRD102KMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1030X	-	VRD1030MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1030X	-	VRD1030MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1031X	-	VRD1031MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1031X	-	VRD1031MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1032X	-	VRD1032MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1032X	-	VRD1032MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1033X	-	VRD1033MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1033X	-	VRD1033MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1034X	-	VRD1034MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1034X	-	VRD1034MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1035X	-	VRD1035MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1035X	-	VRD1035MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1036X	-	VRD1036MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1036X	-	VRD1036MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1037X	-	VRD1037MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1037X	-	VRD1037MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1038X	-	VRD1038MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1038X	-	VRD1038MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1039X	-	VRD1039MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1039X	-	VRD1039MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D103AX	-	VRD103AMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D103AX	-	VRD103AMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D103BX	-	VRD103BMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D103BX	-	VRD103BMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D103CX	-	VRD103CMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D103CX	-	VRD103CMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D103DX	-	VRD103DMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D103DX	-	VRD103DMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D103EX	-	VRD103EMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D103EX	-	VRD103EMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D103FX	-	VRD103FMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D103FX	-	VRD103FMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D103GX	-	VRD103GMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D103GX	-	VRD103GMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D103HX	-	VRD103HMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D103HX	-	VRD103HMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D103JX	-	VRD103JMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D103JX	-	VRD103JMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D103KX	-	VRD103KMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D103KX	-	VRD103KMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1040X	-	VRD1040MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1040X	-	VRD1040MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1041X	-	VRD1041MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1041X	-	VRD1041MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1042X	-	VRD1042MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1042X	-	VRD1042MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1043X	-	VRD1043MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1043X	-	VRD1043MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1044X	-	VRD1044MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1044X	-	VRD1044MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1045X	-	VRD1045MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1045X	-	VRD1045MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1046X	-	VRD1046MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1046X	-	VRD1046MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1047X	-	VRD1047MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1047X	-	VRD1047MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1048X	-	VRD1048MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1048X	-	VRD1048MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1049X	-	VRD1049MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1049X	-	VRD1049MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D104AX	-	VRD104AMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D104AX	-	VRD104AMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D104BX	-	VRD104BMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D104BX	-	VRD104BMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D104CX	-	VRD104CMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D104CX	-	VRD104CMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D104DX	-	VRD104DMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D104DX	-	VRD104DMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D104EX	-	VRD104EMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D104EX	-	VRD104EMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D104FX	-	VRD104FMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D104FX	-	VRD104FMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D104GX	-	VRD104GMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D104GX	-	VRD104GMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D104HX	-	VRD104HMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D104HX	-	VRD104HMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D104JX	-	VRD104JMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D104JX	-	VRD104JMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D104KX	-	VRD104KMNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D104KX	-	VRD104KMTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1050X	-	VRD1050MNX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1050X	-	VRD1050MTX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1108X	-	VRD1108LNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1108X	-	VRD1108LTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1109X	-	VRD1109LNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1109X	-	VRD1109LTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D110JX	-	VRD110JLNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D110JX	-	VRD110JLTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D110KX	-	VRD110KLNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D110KX	-	VRD110KLTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1110X	-	VRD1110LNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1110X	-	VRD1110LTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1111X	-	VRD1111LNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1111X	-	VRD1111LTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1112X	-	VRD1112LNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1112X	-	VRD1112LTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1113X	-	VRD1113LNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1113X	-	VRD1113LTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1114X	-	VRD1114LNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1114X	-	VRD1114LTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1115X	-	VRD1115LNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1115X	-	VRD1115LTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1116X	-	VRD1116LNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1116X	-	VRD1116LTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1117X	-	VRD1117LNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1117X	-	VRD1117LTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1118X	-	VRD1118LNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1118X	-	VRD1118LTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1119X	-	VRD1119LNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1119X	-	VRD1119LTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D111AX	-	VRD111ALNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D111AX	-	VRD111ALTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D111BX	-	VRD111BLNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D111BX	-	VRD111BLTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D111CX	-	VRD111CLNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D111CX	-	VRD111CLTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D111DX	-	VRD111DLNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D111DX	-	VRD111DLTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D111EX	-	VRD111ELNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D111EX	-	VRD111ELTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D111FX	-	VRD111FLNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D111FX	-	VRD111FLTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D111GX	-	VRD111GLNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D111GX	-	VRD111GLTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D111HX	-	VRD111HLNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D111HX	-	VRD111HLTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D111JX	-	VRD111JLNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D111JX	-	VRD111JLTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D111KX	-	VRD111KMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D111KX	-	VRD111KMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1120X	-	VRD1120MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1120X	-	VRD1120MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1121X	-	VRD1121MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1121X	-	VRD1121MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1122X	-	VRD1122MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1122X	-	VRD1122MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1123X	-	VRD1123MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1123X	-	VRD1123MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1124X	-	VRD1124MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1124X	-	VRD1124MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1125X	-	VRD1125MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1125X	-	VRD1125MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1126X	-	VRD1126MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1126X	-	VRD1126MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1127X	-	VRD1127MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1127X	-	VRD1127MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1128X	-	VRD1128MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1128X	-	VRD1128MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1129X	-	VRD1129MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1129X	-	VRD1129MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D112AX	-	VRD112AMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D112AX	-	VRD112AMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D112BX	-	VRD112BMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D112BX	-	VRD112BMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D112CX	-	VRD112CMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D112CX	-	VRD112CMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D112DX	-	VRD112DMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D112DX	-	VRD112DMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D112EX	-	VRD112EMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D112EX	-	VRD112EMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D112FX	-	VRD112FMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D112FX	-	VRD112FMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D112GX	-	VRD112GMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D112GX	-	VRD112GMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D112HX	-	VRD112HMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D112HX	-	VRD112HMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D112JX	-	VRD112JMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D112JX	-	VRD112JMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D112KX	-	VRD112KMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D112KX	-	VRD112KMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1130X	-	VRD1130MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1130X	-	VRD1130MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1131X	-	VRD1131MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1131X	-	VRD1131MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1132X	-	VRD1132MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1132X	-	VRD1132MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1133X	-	VRD1133MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1133X	-	VRD1133MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1134X	-	VRD1134MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1134X	-	VRD1134MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1135X	-	VRD1135MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1135X	-	VRD1135MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1136X	-	VRD1136MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1136X	-	VRD1136MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1137X	-	VRD1137MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1137X	-	VRD1137MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1138X	-	VRD1138MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1138X	-	VRD1138MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1139X	-	VRD1139MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1139X	-	VRD1139MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D113AX	-	VRD113AMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D113AX	-	VRD113AMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D113BX	-	VRD113BMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D113BX	-	VRD113BMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D113CX	-	VRD113CMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D113CX	-	VRD113CMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D113DX	-	VRD113DMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D113DX	-	VRD113DMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D113EX	-	VRD113EMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D113EX	-	VRD113EMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D113FX	-	VRD113FMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D113FX	-	VRD113FMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D113GX	-	VRD113GMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D113GX	-	VRD113GMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D113HX	-	VRD113HMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D113HX	-	VRD113HMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D113JX	-	VRD113JMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D113JX	-	VRD113JMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D113KX	-	VRD113KMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D113KX	-	VRD113KMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1140X	-	VRD1140MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1140X	-	VRD1140MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1141X	-	VRD1141MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1141X	-	VRD1141MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1142X	-	VRD1142MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1142X	-	VRD1142MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1143X	-	VRD1143MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1143X	-	VRD1143MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1144X	-	VRD1144MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1144X	-	VRD1144MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1145X	-	VRD1145MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1145X	-	VRD1145MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1146X	-	VRD1146MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1146X	-	VRD1146MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1147X	-	VRD1147MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1147X	-	VRD1147MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1148X	-	VRD1148MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1148X	-	VRD1148MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1149X	-	VRD1149MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1149X	-	VRD1149MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D114AX	-	VRD114AMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D114AX	-	VRD114AMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D114BX	-	VRD114BMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D114BX	-	VRD114BMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D114CX	-	VRD114CMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D114CX	-	VRD114CMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D114DX	-	VRD114DMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D114DX	-	VRD114DMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D114EX	-	VRD114EMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D114EX	-	VRD114EMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D114FX	-	VRD114FMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D114FX	-	VRD114FMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D114GX	-	VRD114GMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D114GX	-	VRD114GMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D114HX	-	VRD114HMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D114HX	-	VRD114HMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D114JX	-	VRD114JMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D114JX	-	VRD114JMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D114KX	-	VRD114KMNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D114KX	-	VRD114KMTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1150X	-	VRD1150MNX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1150X	-	VRD1150MTX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1208X	-	VRD1208LNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1208X	-	VRD1208LTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1209X	-	VRD1209LNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1209X	-	VRD1209LTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D120JX	-	VRD120JLNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D120JX	-	VRD120JLTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D120KX	-	VRD120KLNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D120KX	-	VRD120KLTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1210X	-	VRD1210LNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1210X	-	VRD1210LTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1211X	-	VRD1211LNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1211X	-	VRD1211LTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1212X	-	VRD1212LNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1212X	-	VRD1212LTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1213X	-	VRD1213LNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1213X	-	VRD1213LTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1214X	-	VRD1214LNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1214X	-	VRD1214LTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1215X	-	VRD1215LNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1215X	-	VRD1215LTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1216X	-	VRD1216LNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1216X	-	VRD1216LTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1217X	-	VRD1217LNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1217X	-	VRD1217LTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1218X	-	VRD1218LNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1218X	-	VRD1218LTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1219X	-	VRD1219LNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1219X	-	VRD1219LTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D121AX	-	VRD121ALNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D121AX	-	VRD121ALTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D121BX	-	VRD121BLNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D121BX	-	VRD121BLTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D121CX	-	VRD121CLNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D121CX	-	VRD121CLTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D121DX	-	VRD121DLNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D121DX	-	VRD121DLTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D121EX	-	VRD121ELNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D121EX	-	VRD121ELTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D121FX	-	VRD121FLNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D121FX	-	VRD121FLTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D121GX	-	VRD121GLNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D121GX	-	VRD121GLTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D121HX	-	VRD121HLNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D121HX	-	VRD121HLTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D121JX	-	VRD121JLNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D121JX	-	VRD121JLTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D121KX	-	VRD121KMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D121KX	-	VRD121KMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1220X	-	VRD1220MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1220X	-	VRD1220MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1221X	-	VRD1221MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1221X	-	VRD1221MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1222X	-	VRD1222MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1222X	-	VRD1222MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1223X	-	VRD1223MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1223X	-	VRD1223MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1224X	-	VRD1224MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1224X	-	VRD1224MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1225X	-	VRD1225MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1225X	-	VRD1225MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1226X	-	VRD1226MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1226X	-	VRD1226MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1227X	-	VRD1227MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1227X	-	VRD1227MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1228X	-	VRD1228MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1228X	-	VRD1228MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1229X	-	VRD1229MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1229X	-	VRD1229MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D122AX	-	VRD122AMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D122AX	-	VRD122AMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D122BX	-	VRD122BMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D122BX	-	VRD122BMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D122CX	-	VRD122CMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D122CX	-	VRD122CMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D122DX	-	VRD122DMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D122DX	-	VRD122DMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D122EX	-	VRD122EMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D122EX	-	VRD122EMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D122FX	-	VRD122FMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D122FX	-	VRD122FMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D122GX	-	VRD122GMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D122GX	-	VRD122GMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D122HX	-	VRD122HMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D122HX	-	VRD122HMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D122JX	-	VRD122JMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D122JX	-	VRD122JMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D122KX	-	VRD122KMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D122KX	-	VRD122KMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1230X	-	VRD1230MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1230X	-	VRD1230MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1231X	-	VRD1231MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1231X	-	VRD1231MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1232X	-	VRD1232MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1232X	-	VRD1232MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1233X	-	VRD1233MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1233X	-	VRD1233MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1234X	-	VRD1234MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1234X	-	VRD1234MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1235X	-	VRD1235MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1235X	-	VRD1235MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1236X	-	VRD1236MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1236X	-	VRD1236MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1237X	-	VRD1237MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1237X	-	VRD1237MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1238X	-	VRD1238MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1238X	-	VRD1238MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1239X	-	VRD1239MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1239X	-	VRD1239MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D123AX	-	VRD123AMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D123AX	-	VRD123AMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D123BX	-	VRD123BMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D123BX	-	VRD123BMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D123CX	-	VRD123CMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D123CX	-	VRD123CMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D123DX	-	VRD123DMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D123DX	-	VRD123DMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D123EX	-	VRD123EMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D123EX	-	VRD123EMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D123FX	-	VRD123FMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D123FX	-	VRD123FMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D123GX	-	VRD123GMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D123GX	-	VRD123GMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D123HX	-	VRD123HMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D123HX	-	VRD123HMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D123JX	-	VRD123JMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D123JX	-	VRD123JMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D123KX	-	VRD123KMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D123KX	-	VRD123KMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1240X	-	VRD1240MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1240X	-	VRD1240MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1241X	-	VRD1241MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1241X	-	VRD1241MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1242X	-	VRD1242MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1242X	-	VRD1242MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1243X	-	VRD1243MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1243X	-	VRD1243MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1244X	-	VRD1244MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1244X	-	VRD1244MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1245X	-	VRD1245MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1245X	-	VRD1245MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1246X	-	VRD1246MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1246X	-	VRD1246MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1247X	-	VRD1247MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1247X	-	VRD1247MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1248X	-	VRD1248MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1248X	-	VRD1248MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1249X	-	VRD1249MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1249X	-	VRD1249MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D124AX	-	VRD124AMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D124AX	-	VRD124AMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D124BX	-	VRD124BMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D124BX	-	VRD124BMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D124CX	-	VRD124CMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D124CX	-	VRD124CMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D124DX	-	VRD124DMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D124DX	-	VRD124DMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D124EX	-	VRD124EMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D124EX	-	VRD124EMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D124FX	-	VRD124FMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D124FX	-	VRD124FMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D124GX	-	VRD124GMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D124GX	-	VRD124GMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D124HX	-	VRD124HMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D124HX	-	VRD124HMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D124JX	-	VRD124JMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D124JX	-	VRD124JMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D124KX	-	VRD124KMNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D124KX	-	VRD124KMTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1250X	-	VRD1250MNX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1250X	-	VRD1250MTX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1308X	-	VRD1308LNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1308X	-	VRD1308LTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1309X	-	VRD1309LNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1309X	-	VRD1309LTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D130JX	-	VRD130JLNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D130JX	-	VRD130JLTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D130KX	-	VRD130KLNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D130KX	-	VRD130KLTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1310X	-	VRD1310LNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1310X	-	VRD1310LTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1311X	-	VRD1311LNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1311X	-	VRD1311LTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1312X	-	VRD1312LNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1312X	-	VRD1312LTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1313X	-	VRD1313LNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1313X	-	VRD1313LTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1314X	-	VRD1314LNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1314X	-	VRD1314LTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1315X	-	VRD1315LNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1315X	-	VRD1315LTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1316X	-	VRD1316LNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1316X	-	VRD1316LTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1317X	-	VRD1317LNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1317X	-	VRD1317LTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1318X	-	VRD1318LNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1318X	-	VRD1318LTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1319X	-	VRD1319LNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1319X	-	VRD1319LTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D131AX	-	VRD131ALNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D131AX	-	VRD131ALTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D131BX	-	VRD131BLNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D131BX	-	VRD131BLTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D131CX	-	VRD131CLNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D131CX	-	VRD131CLTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D131DX	-	VRD131DLNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D131DX	-	VRD131DLTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D131EX	-	VRD131ELNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D131EX	-	VRD131ELTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D131FX	-	VRD131FLNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D131FX	-	VRD131FLTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D131GX	-	VRD131GLNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D131GX	-	VRD131GLTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D131HX	-	VRD131HLNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D131HX	-	VRD131HLTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D131JX	-	VRD131JLNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D131JX	-	VRD131JLTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D131KX	-	VRD131KMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D131KX	-	VRD131KMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1320X	-	VRD1320MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1320X	-	VRD1320MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1321X	-	VRD1321MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1321X	-	VRD1321MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1322X	-	VRD1322MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1322X	-	VRD1322MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1323X	-	VRD1323MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1323X	-	VRD1323MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1324X	-	VRD1324MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1324X	-	VRD1324MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1325X	-	VRD1325MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1325X	-	VRD1325MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1326X	-	VRD1326MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1326X	-	VRD1326MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1327X	-	VRD1327MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1327X	-	VRD1327MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1328X	-	VRD1328MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1328X	-	VRD1328MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1329X	-	VRD1329MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1329X	-	VRD1329MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D132AX	-	VRD132AMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D132AX	-	VRD132AMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D132BX	-	VRD132BMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D132BX	-	VRD132BMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D132CX	-	VRD132CMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D132CX	-	VRD132CMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D132DX	-	VRD132DMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D132DX	-	VRD132DMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D132EX	-	VRD132EMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D132EX	-	VRD132EMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D132FX	-	VRD132FMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D132FX	-	VRD132FMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D132GX	-	VRD132GMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D132GX	-	VRD132GMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D132HX	-	VRD132HMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D132HX	-	VRD132HMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D132JX	-	VRD132JMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D132JX	-	VRD132JMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D132KX	-	VRD132KMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D132KX	-	VRD132KMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1330X	-	VRD1330MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1330X	-	VRD1330MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1331X	-	VRD1331MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1331X	-	VRD1331MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1332X	-	VRD1332MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1332X	-	VRD1332MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1333X	-	VRD1333MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1333X	-	VRD1333MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1334X	-	VRD1334MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1334X	-	VRD1334MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1335X	-	VRD1335MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1335X	-	VRD1335MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1336X	-	VRD1336MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1336X	-	VRD1336MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1337X	-	VRD1337MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1337X	-	VRD1337MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1338X	-	VRD1338MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1338X	-	VRD1338MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1339X	-	VRD1339MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1339X	-	VRD1339MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D133AX	-	VRD133AMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D133AX	-	VRD133AMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D133BX	-	VRD133BMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D133BX	-	VRD133BMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D133CX	-	VRD133CMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D133CX	-	VRD133CMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D133DX	-	VRD133DMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D133DX	-	VRD133DMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D133EX	-	VRD133EMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D133EX	-	VRD133EMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D133FX	-	VRD133FMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D133FX	-	VRD133FMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D133GX	-	VRD133GMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D133GX	-	VRD133GMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D133HX	-	VRD133HMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D133HX	-	VRD133HMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D133JX	-	VRD133JMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D133JX	-	VRD133JMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D133KX	-	VRD133KMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D133KX	-	VRD133KMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1340X	-	VRD1340MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1340X	-	VRD1340MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1341X	-	VRD1341MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1341X	-	VRD1341MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1342X	-	VRD1342MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1342X	-	VRD1342MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1343X	-	VRD1343MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1343X	-	VRD1343MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1344X	-	VRD1344MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1344X	-	VRD1344MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1345X	-	VRD1345MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1345X	-	VRD1345MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1346X	-	VRD1346MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1346X	-	VRD1346MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1347X	-	VRD1347MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1347X	-	VRD1347MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1348X	-	VRD1348MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1348X	-	VRD1348MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1349X	-	VRD1349MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1349X	-	VRD1349MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D134AX	-	VRD134AMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D134AX	-	VRD134AMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D134BX	-	VRD134BMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D134BX	-	VRD134BMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D134CX	-	VRD134CMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D134CX	-	VRD134CMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D134DX	-	VRD134DMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D134DX	-	VRD134DMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D134EX	-	VRD134EMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D134EX	-	VRD134EMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D134FX	-	VRD134FMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D134FX	-	VRD134FMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D134GX	-	VRD134GMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D134GX	-	VRD134GMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D134HX	-	VRD134HMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D134HX	-	VRD134HMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D134JX	-	VRD134JMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D134JX	-	VRD134JMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D134KX	-	VRD134KMNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D134KX	-	VRD134KMTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1350X	-	VRD1350MNX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1350X	-	VRD1350MTX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D14	-	IMD14	Si-n/p-Digi	Sw, 50V, 500mA, R1/R2=220R/10k	SOT-23-6	33	TD2	7b	Rhm
D1408X	-	VRD1408LNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1408X	-	VRD1408LTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1409X	-	VRD1409LNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1409X	-	VRD1409LTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D140JX	-	VRD140JLNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D140JX	-	VRD140JLTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D140KX	-	VRD140KLNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D140KX	-	VRD140KLTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1410X	-	VRD1410LNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1410X	-	VRD1410LTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1411X	-	VRD1411LNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1411X	-	VRD1411LTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1412X	-	VRD1412LNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1412X	-	VRD1412LTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1413X	-	VRD1413LNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1413X	-	VRD1413LTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1414X	-	VRD1414LNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1414X	-	VRD1414LTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1415X	-	VRD1415LNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1415X	-	VRD1415LTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1416X	-	VRD1416LNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1416X	-	VRD1416LTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1417X	-	VRD1417LNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1417X	-	VRD1417LTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1418X	-	VRD1418LNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1418X	-	VRD1418LTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1419X	-	VRD1419LNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1419X	-	VRD1419LTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D141AX	-	VRD141ALNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D141AX	-	VRD141ALTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D141BX	-	VRD141BLNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D141BX	-	VRD141BLTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D141CX	-	VRD141CLNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D141CX	-	VRD141CLTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D141DX	-	VRD141DLNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D141DX	-	VRD141DLTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D141EX	-	VRD141ELNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D141EX	-	VRD141ELTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D141FX	-	VRD141FLNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D141FX	-	VRD141FLTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D141GX	-	VRD141GLNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D141GX	-	VRD141GLTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D141HX	-	VRD141HLNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D141HX	-	VRD141HLTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D141JX	-	VRD141JLNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D141JX	-	VRD141JLTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D141KX	-	VRD141KMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D141KX	-	VRD141KMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1420X	-	VRD1420MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1420X	-	VRD1420MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1421X	-	VRD1421MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1421X	-	VRD1421MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1422X	-	VRD1422MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1422X	-	VRD1422MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1423X	-	VRD1423MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1423X	-	VRD1423MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1424X	-	VRD1424MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1424X	-	VRD1424MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1425X	-	VRD1425MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1425X	-	VRD1425MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1426X	-	VRD1426MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1426X	-	VRD1426MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1427X	-	VRD1427MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1427X	-	VRD1427MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1428X	-	VRD1428MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1428X	-	VRD1428MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1429X	-	VRD1429MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1429X	-	VRD1429MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D142AX	-	VRD142AMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D142AX	-	VRD142AMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D142BX	-	VRD142BMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D142BX	-	VRD142BMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D142CX	-	VRD142CMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D142CX	-	VRD142CMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D142DX	-	VRD142DMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D142DX	-	VRD142DMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D142EX	-	VRD142EMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D142EX	-	VRD142EMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D142FX	-	VRD142FMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D142FX	-	VRD142FMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D142GX	-	VRD142GMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D142GX	-	VRD142GMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D142HX	-	VRD142HMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D142HX	-	VRD142HMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D142JX	-	VRD142JMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D142JX	-	VRD142JMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D142KX	-	VRD142KMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D142KX	-	VRD142KMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1430X	-	VRD1430MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1430X	-	VRD1430MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1431X	-	VRD1431MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1431X	-	VRD1431MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1432X	-	VRD1432MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1432X	-	VRD1432MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1433X	-	VRD1433MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1433X	-	VRD1433MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1434X	-	VRD1434MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1434X	-	VRD1434MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1435X	-	VRD1435MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1435X	-	VRD1435MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1436X	-	VRD1436MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1436X	-	VRD1436MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1437X	-	VRD1437MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1437X	-	VRD1437MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1438X	-	VRD1438MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1438X	-	VRD1438MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1439X	-	VRD1439MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1439X	-	VRD1439MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D143AX	-	VRD143AMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D143AX	-	VRD143AMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D143BX	-	VRD143BMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D143BX	-	VRD143BMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D143CX	-	VRD143CMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D143CX	-	VRD143CMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D143DX	-	VRD143DMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D143DX	-	VRD143DMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D143EX	-	VRD143EMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D143EX	-	VRD143EMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D143FX	-	VRD143FMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D143FX	-	VRD143FMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D143GX	-	VRD143GMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D143GX	-	VRD143GMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D143HX	-	VRD143HMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D143HX	-	VRD143HMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D143JX	-	VRD143JMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D143JX	-	VRD143JMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D143KX	-	VRD143KMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D143KX	-	VRD143KMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1440X	-	VRD1440MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1440X	-	VRD1440MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1441X	-	VRD1441MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1441X	-	VRD1441MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1442X	-	VRD1442MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1442X	-	VRD1442MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1443X	-	VRD1443MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1443X	-	VRD1443MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1444X	-	VRD1444MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1444X	-	VRD1444MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1445X	-	VRD1445MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1445X	-	VRD1445MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1446X	-	VRD1446MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1446X	-	VRD1446MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1447X	-	VRD1447MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1447X	-	VRD1447MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1448X	-	VRD1448MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1448X	-	VRD1448MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1449X	-	VRD1449MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1449X	-	VRD1449MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D144AX	-	VRD144AMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D144AX	-	VRD144AMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D144BX	-	VRD144BMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D144BX	-	VRD144BMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D144CX	-	VRD144CMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D144CX	-	VRD144CMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D144DX	-	VRD144DMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D144DX	-	VRD144DMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D144EX	-	VRD144EMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D144EX	-	VRD144EMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D144FX	-	VRD144FMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D144FX	-	VRD144FMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D144GX	-	VRD144GMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D144GX	-	VRD144GMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D144HX	-	VRD144HMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D144HX	-	VRD144HMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D144JX	-	VRD144JMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D144JX	-	VRD144JMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D144KX	-	VRD144KMNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D144KX	-	VRD144KMTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1450X	-	VRD1450MNX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1450X	-	VRD1450MTX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1508X	-	VRD1508LNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1508X	-	VRD1508LTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1509X	-	VRD1509LNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1509X	-	VRD1509LTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D150JX	-	VRD150JLNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D150JX	-	VRD150JLTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D150KX	-	VRD150KLNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D150KX	-	VRD150KLTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1510X	-	VRD1510LNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1510X	-	VRD1510LTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1511X	-	VRD1511LNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1511X	-	VRD1511LTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1512X	-	VRD1512LNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1512X	-	VRD1512LTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1513X	-	VRD1513LNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1513X	-	VRD1513LTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1514X	-	VRD1514LNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1514X	-	VRD1514LTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1515X	-	VRD1515LNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1515X	-	VRD1515LTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1516X	-	VRD1516LNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1516X	-	VRD1516LTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1517X	-	VRD1517LNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1517X	-	VRD1517LTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1518X	-	VRD1518LNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1518X	-	VRD1518LTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1519X	-	VRD1519LNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1519X	-	VRD1519LTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D151AX	-	VRD151ALNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D151AX	-	VRD151ALTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D151BX	-	VRD151BLNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D151BX	-	VRD151BLTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D151CX	-	VRD151CLNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D151CX	-	VRD151CLTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D151DX	-	VRD151DLNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D151DX	-	VRD151DLTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D151EX	-	VRD151ELNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D151EX	-	VRD151ELTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D151FX	-	VRD151FLNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D151FX	-	VRD151FLTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D151GX	-	VRD151GLNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D151GX	-	VRD151GLTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D151HX	-	VRD151HLNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D151HX	-	VRD151HLTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D151JX	-	VRD151JLNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D151JX	-	VRD151JLTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D151KX	-	VRD151KMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D151KX	-	VRD151KMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1520X	-	VRD1520MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1520X	-	VRD1520MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1521X	-	VRD1521MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1521X	-	VRD1521MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1522X	-	VRD1522MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1522X	-	VRD1522MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1523X	-	VRD1523MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1523X	-	VRD1523MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1524X	-	VRD1524MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1524X	-	VRD1524MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1525X	-	VRD1525MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1525X	-	VRD1525MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1526X	-	VRD1526MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1526X	-	VRD1526MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1527X	-	VRD1527MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1527X	-	VRD1527MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1528X	-	VRD1528MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1528X	-	VRD1528MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1529X	-	VRD1529MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1529X	-	VRD1529MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D152AX	-	VRD152AMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D152AX	-	VRD152AMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D152BX	-	VRD152BMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D152BX	-	VRD152BMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D152CX	-	VRD152CMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D152CX	-	VRD152CMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D152DX	-	VRD152DMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D152DX	-	VRD152DMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D152EX	-	VRD152EMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D152EX	-	VRD152EMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D152FX	-	VRD152FMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D152FX	-	VRD152FMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D152GX	-	VRD152GMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D152GX	-	VRD152GMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D152HX	-	VRD152HMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D152HX	-	VRD152HMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D152JX	-	VRD152JMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D152JX	-	VRD152JMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D152KX	-	VRD152KMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D152KX	-	VRD152KMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1530X	-	VRD1530MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1530X	-	VRD1530MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1531X	-	VRD1531MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1531X	-	VRD1531MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1532X	-	VRD1532MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1532X	-	VRD1532MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1533X	-	VRD1533MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1533X	-	VRD1533MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1534X	-	VRD1534MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1534X	-	VRD1534MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1535X	-	VRD1535MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1535X	-	VRD1535MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1536X	-	VRD1536MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1536X	-	VRD1536MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1537X	-	VRD1537MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1537X	-	VRD1537MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1538X	-	VRD1538MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1538X	-	VRD1538MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1539X	-	VRD1539MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1539X	-	VRD1539MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D153AX	-	VRD153AMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D153AX	-	VRD153AMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D153BX	-	VRD153BMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D153BX	-	VRD153BMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D153CX	-	VRD153CMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D153CX	-	VRD153CMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D153DX	-	VRD153DMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D153DX	-	VRD153DMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D153EX	-	VRD153EMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D153EX	-	VRD153EMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D153FX	-	VRD153FMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D153FX	-	VRD153FMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D153GX	-	VRD153GMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D153GX	-	VRD153GMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D153HX	-	VRD153HMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D153HX	-	VRD153HMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D153JX	-	VRD153JMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D153JX	-	VRD153JMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D153KX	-	VRD153KMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D153KX	-	VRD153KMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1540X	-	VRD1540MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1540X	-	VRD1540MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1541X	-	VRD1541MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1541X	-	VRD1541MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1542X	-	VRD1542MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1542X	-	VRD1542MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1543X	-	VRD1543MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1543X	-	VRD1543MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1544X	-	VRD1544MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1544X	-	VRD1544MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1545X	-	VRD1545MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1545X	-	VRD1545MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1546X	-	VRD1546MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1546X	-	VRD1546MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1547X	-	VRD1547MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1547X	-	VRD1547MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1548X	-	VRD1548MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1548X	-	VRD1548MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1549X	-	VRD1549MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1549X	-	VRD1549MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D154AX	-	VRD154AMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D154AX	-	VRD154AMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D154BX	-	VRD154BMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D154BX	-	VRD154BMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D154CX	-	VRD154CMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D154CX	-	VRD154CMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D154DX	-	VRD154DMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D154DX	-	VRD154DMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D154EX	-	VRD154EMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D154EX	-	VRD154EMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D154FX	-	VRD154FMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D154FX	-	VRD154FMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D154GX	-	VRD154GMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D154GX	-	VRD154GMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D154HX	-	VRD154HMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D154HX	-	VRD154HMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D154JX	-	VRD154JMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D154JX	-	VRD154JMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D154KX	-	VRD154KMNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D154KX	-	VRD154KMTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1550X	-	VRD1550MNX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1550X	-	VRD1550MTX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D15A	-	R1171S151A	LVR-IC	LDO, 1.5V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D15B	-	R1171S151B	LVR-IC	LDO, 1.5V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D16	-	IMD16A	Si-n/p-Digi	Sw, 50V, p: 500mA, n: 100mA, R1/R2=2.2k/22k	SOT-23-6	33	TD2	7b	Rhm





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1608X	-	VRD1608LNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1608X	-	VRD1608LTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1609X	-	VRD1609LNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1609X	-	VRD1609LTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D160JX	-	VRD160JLNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D160JX	-	VRD160JLTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D160KX	-	VRD160KLNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D160KX	-	VRD160KLTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1610X	-	VRD1610LNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1610X	-	VRD1610LTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1611X	-	VRD1611LNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1611X	-	VRD1611LTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1612X	-	VRD1612LNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1612X	-	VRD1612LTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1613X	-	VRD1613LNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1613X	-	VRD1613LTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1614X	-	VRD1614LNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1614X	-	VRD1614LTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1615X	-	VRD1615LNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1615X	-	VRD1615LTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1616X	-	VRD1616LNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1616X	-	VRD1616LTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1617X	-	VRD1617LNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1617X	-	VRD1617LTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1618X	-	VRD1618LNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1618X	-	VRD1618LTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1619X	-	VRD1619LNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1619X	-	VRD1619LTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D161AX	-	VRD161ALNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D161AX	-	VRD161ALTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D161BX	-	VRD161BLNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D161BX	-	VRD161BLTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D161CX	-	VRD161CLNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D161CX	-	VRD161CLTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D161DX	-	VRD161DLNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D161DX	-	VRD161DLTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D161EX	-	VRD161ELNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D161EX	-	VRD161ELTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D161FX	-	VRD161FLNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D161FX	-	VRD161FLTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D161GX	-	VRD161GLNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D161GX	-	VRD161GLTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D161HX	-	VRD161HLNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D161HX	-	VRD161HLTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D161JX	-	VRD161JLNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D161JX	-	VRD161JLTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D161KX	-	VRD161KMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D161KX	-	VRD161KMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1620X	-	VRD1620MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1620X	-	VRD1620MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1621X	-	VRD1621MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1621X	-	VRD1621MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1622X	-	VRD1622MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1622X	-	VRD1622MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1623X	-	VRD1623MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1623X	-	VRD1623MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1624X	-	VRD1624MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1624X	-	VRD1624MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1625X	-	VRD1625MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1625X	-	VRD1625MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1626X	-	VRD1626MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1626X	-	VRD1626MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1627X	-	VRD1627MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1627X	-	VRD1627MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1628X	-	VRD1628MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1628X	-	VRD1628MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1629X	-	VRD1629MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1629X	-	VRD1629MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D162AX	-	VRD162AMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D162AX	-	VRD162AMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D162BX	-	VRD162BMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D162BX	-	VRD162BMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D162CX	-	VRD162CMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D162CX	-	VRD162CMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D162DX	-	VRD162DMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D162DX	-	VRD162DMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D162EX	-	VRD162EMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D162EX	-	VRD162EMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D162FX	-	VRD162FMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D162FX	-	VRD162FMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D162GX	-	VRD162GMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D162GX	-	VRD162GMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D162HX	-	VRD162HMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D162HX	-	VRD162HMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D162JX	-	VRD162JMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D162JX	-	VRD162JMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D162KX	-	VRD162KMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D162KX	-	VRD162KMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1630X	-	VRD1630MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1630X	-	VRD1630MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1631X	-	VRD1631MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1631X	-	VRD1631MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1632X	-	VRD1632MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1632X	-	VRD1632MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1633X	-	VRD1633MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1633X	-	VRD1633MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1634X	-	VRD1634MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1634X	-	VRD1634MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1635X	-	VRD1635MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1635X	-	VRD1635MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1636X	-	VRD1636MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1636X	-	VRD1636MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1637X	-	VRD1637MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1637X	-	VRD1637MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1638X	-	VRD1638MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1638X	-	VRD1638MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1639X	-	VRD1639MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1639X	-	VRD1639MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D163AX	-	VRD163AMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D163AX	-	VRD163AMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D163BX	-	VRD163BMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D163BX	-	VRD163BMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D163CX	-	VRD163CMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D163CX	-	VRD163CMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D163DX	-	VRD163DMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D163DX	-	VRD163DMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D163EX	-	VRD163EMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D163EX	-	VRD163EMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D163FX	-	VRD163FMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D163FX	-	VRD163FMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D163GX	-	VRD163GMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D163GX	-	VRD163GMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D163HX	-	VRD163HMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D163HX	-	VRD163HMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D163JX	-	VRD163JMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D163JX	-	VRD163JMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D163KX	-	VRD163KMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D163KX	-	VRD163KMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1640X	-	VRD1640MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1640X	-	VRD1640MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1641X	-	VRD1641MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1641X	-	VRD1641MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1642X	-	VRD1642MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1642X	-	VRD1642MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1643X	-	VRD1643MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1643X	-	VRD1643MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1644X	-	VRD1644MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1644X	-	VRD1644MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1645X	-	VRD1645MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1645X	-	VRD1645MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1646X	-	VRD1646MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1646X	-	VRD1646MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1647X	-	VRD1647MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1647X	-	VRD1647MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1648X	-	VRD1648MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1648X	-	VRD1648MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1649X	-	VRD1649MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1649X	-	VRD1649MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D164AX	-	VRD164AMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D164AX	-	VRD164AMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D164BX	-	VRD164BMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D164BX	-	VRD164BMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D164CX	-	VRD164CMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D164CX	-	VRD164CMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D164DX	-	VRD164DMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D164DX	-	VRD164DMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D164EX	-	VRD164EMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D164EX	-	VRD164EMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D164FX	-	VRD164FMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D164FX	-	VRD164FMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D164GX	-	VRD164GMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D164GX	-	VRD164GMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D164HX	-	VRD164HMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D164HX	-	VRD164HMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D164JX	-	VRD164JMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D164JX	-	VRD164JMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D164KX	-	VRD164KMNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D164KX	-	VRD164KMTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1650X	-	VRD1650MNX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1650X	-	VRD1650MTX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D16A	-	R1171S161A	LVR-IC	LDO, 1.6V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D16B	-	R1171S161B	LVR-IC	LDO, 1.6V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D1708X	-	VRD1708LNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1708X	-	VRD1708LTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1709X	-	VRD1709LNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1709X	-	VRD1709LTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D170JX	-	VRD170JLNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D170JX	-	VRD170JLTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D170KX	-	VRD170KLNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D170KX	-	VRD170KLTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1710X	-	VRD1710LNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1710X	-	VRD1710LTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1711X	-	VRD1711LNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1711X	-	VRD1711LTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1712X	-	VRD1712LNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1712X	-	VRD1712LTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1713X	-	VRD1713LNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1713X	-	VRD1713LTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1714X	-	VRD1714LNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1714X	-	VRD1714LTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1715X	-	VRD1715LNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1715X	-	VRD1715LTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1716X	-	VRD1716LNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1716X	-	VRD1716LTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1717X	-	VRD1717LNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1717X	-	VRD1717LTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1718X	-	VRD1718LNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1718X	-	VRD1718LTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1719X	-	VRD1719LNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1719X	-	VRD1719LTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D171AX	-	VRD171ALNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D171AX	-	VRD171ALTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D171BX	-	VRD171BLNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D171BX	-	VRD171BLTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D171CX	-	VRD171CLNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D171CX	-	VRD171CLTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D171DX	-	VRD171DLNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D171DX	-	VRD171DLTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D171EX	-	VRD171ELNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D171EX	-	VRD171ELTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D171FX	-	VRD171FLNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D171FX	-	VRD171FLTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D171GX	-	VRD171GLNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D171GX	-	VRD171GLTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D171HX	-	VRD171HLNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D171HX	-	VRD171HLTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D171JX	-	VRD171JLNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D171JX	-	VRD171JLTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D171KX	-	VRD171KMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D171KX	-	VRD171KMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1720X	-	VRD1720MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1720X	-	VRD1720MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1721X	-	VRD1721MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1721X	-	VRD1721MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1722X	-	VRD1722MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1722X	-	VRD1722MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1723X	-	VRD1723MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1723X	-	VRD1723MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1724X	-	VRD1724MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1724X	-	VRD1724MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1725X	-	VRD1725MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1725X	-	VRD1725MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1726X	-	VRD1726MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1726X	-	VRD1726MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1727X	-	VRD1727MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1727X	-	VRD1727MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1728X	-	VRD1728MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1728X	-	VRD1728MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1729X	-	VRD1729MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1729X	-	VRD1729MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D172AX	-	VRD172AMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D172AX	-	VRD172AMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D172BX	-	VRD172BMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D172BX	-	VRD172BMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D172CX	-	VRD172CMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D172CX	-	VRD172CMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D172DX	-	VRD172DMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D172DX	-	VRD172DMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D172EX	-	VRD172EMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D172EX	-	VRD172EMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D172FX	-	VRD172FMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D172FX	-	VRD172FMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D172GX	-	VRD172GMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D172GX	-	VRD172GMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D172HX	-	VRD172HMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D172HX	-	VRD172HMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D172JX	-	VRD172JMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D172JX	-	VRD172JMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D172KX	-	VRD172KMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D172KX	-	VRD172KMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1730X	-	VRD1730MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1730X	-	VRD1730MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1731X	-	VRD1731MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1731X	-	VRD1731MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1732X	-	VRD1732MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1732X	-	VRD1732MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1733X	-	VRD1733MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1733X	-	VRD1733MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1734X	-	VRD1734MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1734X	-	VRD1734MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1735X	-	VRD1735MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1735X	-	VRD1735MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1736X	-	VRD1736MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1736X	-	VRD1736MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1737X	-	VRD1737MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1737X	-	VRD1737MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1738X	-	VRD1738MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1738X	-	VRD1738MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1739X	-	VRD1739MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1739X	-	VRD1739MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D173AX	-	VRD173AMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D173AX	-	VRD173AMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D173BX	-	VRD173BMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D173BX	-	VRD173BMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D173CX	-	VRD173CMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D173CX	-	VRD173CMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D173DX	-	VRD173DMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D173DX	-	VRD173DMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D173EX	-	VRD173EMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D173EX	-	VRD173EMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D173FX	-	VRD173FMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D173FX	-	VRD173FMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D173GX	-	VRD173GMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D173GX	-	VRD173GMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D173HX	-	VRD173HMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D173HX	-	VRD173HMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D173JX	-	VRD173JMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D173JX	-	VRD173JMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D173KX	-	VRD173KMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D173KX	-	VRD173KMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1740X	-	VRD1740MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1740X	-	VRD1740MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1741X	-	VRD1741MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1741X	-	VRD1741MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1742X	-	VRD1742MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1742X	-	VRD1742MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1743X	-	VRD1743MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1743X	-	VRD1743MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1744X	-	VRD1744MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1744X	-	VRD1744MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1745X	-	VRD1745MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1745X	-	VRD1745MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1746X	-	VRD1746MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1746X	-	VRD1746MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1747X	-	VRD1747MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1747X	-	VRD1747MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1748X	-	VRD1748MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1748X	-	VRD1748MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1749X	-	VRD1749MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1749X	-	VRD1749MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D174AX	-	VRD174AMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D174AX	-	VRD174AMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D174BX	-	VRD174BMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D174BX	-	VRD174BMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D174CX	-	VRD174CMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D174CX	-	VRD174CMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D174DX	-	VRD174DMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D174DX	-	VRD174DMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D174EX	-	VRD174EMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D174EX	-	VRD174EMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D174FX	-	VRD174FMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D174FX	-	VRD174FMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D174GX	-	VRD174GMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D174GX	-	VRD174GMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D174HX	-	VRD174HMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D174HX	-	VRD174HMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D174JX	-	VRD174JMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D174JX	-	VRD174JMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D174KX	-	VRD174KMNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D174KX	-	VRD174KMTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1750X	-	VRD1750MNX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1750X	-	VRD1750MTX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D17A	-	R1171S171A	LVR-IC	LDO, 1.7V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D17B	-	R1171S171B	LVR-IC	LDO, 1.7V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D1808X	-	VRD1808LNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1808X	-	VRD1808LTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1809X	-	VRD1809LNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1809X	-	VRD1809LTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D180JX	-	VRD180JLNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D180JX	-	VRD180JLTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D180KX	-	VRD180KLNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D180KX	-	VRD180KLTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1810X	-	VRD1810LNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1810X	-	VRD1810LTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1811X	-	VRD1811LNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1811X	-	VRD1811LTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1812X	-	VRD1812LNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1812X	-	VRD1812LTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1813X	-	VRD1813LNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1813X	-	VRD1813LTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1814X	-	VRD1814LNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1814X	-	VRD1814LTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1815X	-	VRD1815LNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1815X	-	VRD1815LTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1816X	-	VRD1816LNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1816X	-	VRD1816LTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1817X	-	VRD1817LNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1817X	-	VRD1817LTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1818X	-	VRD1818LNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1818X	-	VRD1818LTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1819X	-	VRD1819LNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1819X	-	VRD1819LTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D181AX	-	VRD181ALNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D181AX	-	VRD181ALTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D181BX	-	VRD181BLNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D181BX	-	VRD181BLTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D181CX	-	VRD181CLNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D181CX	-	VRD181CLTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D181DX	-	VRD181DLNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D181DX	-	VRD181DLTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D181EX	-	VRD181ELNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D181EX	-	VRD181ELTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D181FX	-	VRD181FLNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D181FX	-	VRD181FLTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D181GX	-	VRD181GLNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D181GX	-	VRD181GLTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D181HX	-	VRD181HLNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D181HX	-	VRD181HLTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D181JX	-	VRD181JLNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D181JX	-	VRD181JLTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D181KX	-	VRD181KMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D181KX	-	VRD181KMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1820X	-	VRD1820MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1820X	-	VRD1820MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1821X	-	VRD1821MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1821X	-	VRD1821MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1822X	-	VRD1822MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1822X	-	VRD1822MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1823X	-	VRD1823MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1823X	-	VRD1823MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1824X	-	VRD1824MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1824X	-	VRD1824MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1825X	-	VRD1825MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1825X	-	VRD1825MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1826X	-	VRD1826MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1826X	-	VRD1826MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1827X	-	VRD1827MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1827X	-	VRD1827MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1828X	-	VRD1828MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1828X	-	VRD1828MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1829X	-	VRD1829MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1829X	-	VRD1829MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D182AX	-	VRD182AMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D182AX	-	VRD182AMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D182BX	-	VRD182BMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D182BX	-	VRD182BMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D182CX	-	VRD182CMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D182CX	-	VRD182CMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D182DX	-	VRD182DMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D182DX	-	VRD182DMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D182EX	-	VRD182EMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D182EX	-	VRD182EMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D182FX	-	VRD182FMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D182FX	-	VRD182FMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D182GX	-	VRD182GMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D182GX	-	VRD182GMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D182HX	-	VRD182HMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D182HX	-	VRD182HMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D182JX	-	VRD182JMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D182JX	-	VRD182JMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D182KX	-	VRD182KMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D182KX	-	VRD182KMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1830X	-	VRD1830MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1830X	-	VRD1830MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1831X	-	VRD1831MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1831X	-	VRD1831MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1832X	-	VRD1832MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1832X	-	VRD1832MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1833X	-	VRD1833MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1833X	-	VRD1833MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1834X	-	VRD1834MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1834X	-	VRD1834MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1835X	-	VRD1835MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1835X	-	VRD1835MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1836X	-	VRD1836MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1836X	-	VRD1836MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1837X	-	VRD1837MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1837X	-	VRD1837MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1838X	-	VRD1838MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1838X	-	VRD1838MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1839X	-	VRD1839MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1839X	-	VRD1839MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D183AX	-	VRD183AMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D183AX	-	VRD183AMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D183BX	-	VRD183BMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D183BX	-	VRD183BMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D183CX	-	VRD183CMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D183CX	-	VRD183CMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D183DX	-	VRD183DMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D183DX	-	VRD183DMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D183EX	-	VRD183EMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D183EX	-	VRD183EMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D183FX	-	VRD183FMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D183FX	-	VRD183FMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D183GX	-	VRD183GMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D183GX	-	VRD183GMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D183HX	-	VRD183HMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D183HX	-	VRD183HMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D183JX	-	VRD183JMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D183JX	-	VRD183JMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D183KX	-	VRD183KMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D183KX	-	VRD183KMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1840X	-	VRD1840MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1840X	-	VRD1840MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1841X	-	VRD1841MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1841X	-	VRD1841MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1842X	-	VRD1842MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1842X	-	VRD1842MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1843X	-	VRD1843MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1843X	-	VRD1843MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1844X	-	VRD1844MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1844X	-	VRD1844MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1845X	-	VRD1845MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1845X	-	VRD1845MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1846X	-	VRD1846MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1846X	-	VRD1846MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1847X	-	VRD1847MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1847X	-	VRD1847MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1848X	-	VRD1848MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1848X	-	VRD1848MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1849X	-	VRD1849MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1849X	-	VRD1849MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D184AX	-	VRD184AMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D184AX	-	VRD184AMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D184BX	-	VRD184BMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D184BX	-	VRD184BMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D184CX	-	VRD184CMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D184CX	-	VRD184CMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D184DX	-	VRD184DMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D184DX	-	VRD184DMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D184EX	-	VRD184EMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D184EX	-	VRD184EMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D184FX	-	VRD184FMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D184FX	-	VRD184FMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D184GX	-	VRD184GMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D184GX	-	VRD184GMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D184HX	-	VRD184HMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D184HX	-	VRD184HMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D184JX	-	VRD184JMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D184JX	-	VRD184JMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D184KX	-	VRD184KMNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D184KX	-	VRD184KMTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1850X	-	VRD1850MNX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1850X	-	VRD1850MTX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D18A	-	R1171S181A	LVR-IC	LDO, 1.8V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D18B	-	R1171S181B	LVR-IC	LDO, 1.8V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D1908X	-	VRD1908LNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1908X	-	VRD1908LTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1909X	-	VRD1909LNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1909X	-	VRD1909LTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D190JX	-	VRD190JLNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D190JX	-	VRD190JLTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D190KX	-	VRD190KLNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D190KX	-	VRD190KLTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1910X	-	VRD1910LNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1910X	-	VRD1910LTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1911X	-	VRD1911LNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1911X	-	VRD1911LTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1912X	-	VRD1912LNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1912X	-	VRD1912LTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1913X	-	VRD1913LNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1913X	-	VRD1913LTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1914X	-	VRD1914LNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1914X	-	VRD1914LTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1915X	-	VRD1915LNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1915X	-	VRD1915LTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1916X	-	VRD1916LNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1916X	-	VRD1916LTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1917X	-	VRD1917LNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1917X	-	VRD1917LTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1918X	-	VRD1918LNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1918X	-	VRD1918LTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1919X	-	VRD1919LNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1919X	-	VRD1919LTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D191AX	-	VRD191ALNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D191AX	-	VRD191ALTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D191BX	-	VRD191BLNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D191BX	-	VRD191BLTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D191CX	-	VRD191CLNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D191CX	-	VRD191CLTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D191DX	-	VRD191DLNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D191DX	-	VRD191DLTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D191EX	-	VRD191ELNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D191EX	-	VRD191ELTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D191FX	-	VRD191FLNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D191FX	-	VRD191FLTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D191GX	-	VRD191GLNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D191GX	-	VRD191GLTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D191HX	-	VRD191HLNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D191HX	-	VRD191HLTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D191JX	-	VRD191JLNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D191JX	-	VRD191JLTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D191KX	-	VRD191KMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D191KX	-	VRD191KMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1920X	-	VRD1920MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1920X	-	VRD1920MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1921X	-	VRD1921MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1921X	-	VRD1921MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1922X	-	VRD1922MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1922X	-	VRD1922MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1923X	-	VRD1923MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1923X	-	VRD1923MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1924X	-	VRD1924MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1924X	-	VRD1924MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1925X	-	VRD1925MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1925X	-	VRD1925MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1926X	-	VRD1926MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1926X	-	VRD1926MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1927X	-	VRD1927MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1927X	-	VRD1927MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1928X	-	VRD1928MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1928X	-	VRD1928MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1929X	-	VRD1929MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1929X	-	VRD1929MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D192AX	-	VRD192AMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D192AX	-	VRD192AMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D192BX	-	VRD192BMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D192BX	-	VRD192BMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D192CX	-	VRD192CMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D192CX	-	VRD192CMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D192DX	-	VRD192DMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D192DX	-	VRD192DMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D192EX	-	VRD192EMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D192EX	-	VRD192EMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D192FX	-	VRD192FMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D192FX	-	VRD192FMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D192GX	-	VRD192GMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D192GX	-	VRD192GMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D192HX	-	VRD192HMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D192HX	-	VRD192HMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D192JX	-	VRD192JMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D192JX	-	VRD192JMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D192KX	-	VRD192KMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D192KX	-	VRD192KMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1930X	-	VRD1930MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1930X	-	VRD1930MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1931X	-	VRD1931MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1931X	-	VRD1931MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1932X	-	VRD1932MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1932X	-	VRD1932MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1933X	-	VRD1933MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1933X	-	VRD1933MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1934X	-	VRD1934MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1934X	-	VRD1934MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1935X	-	VRD1935MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1935X	-	VRD1935MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1936X	-	VRD1936MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1936X	-	VRD1936MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1937X	-	VRD1937MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1937X	-	VRD1937MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1938X	-	VRD1938MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1938X	-	VRD1938MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1939X	-	VRD1939MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1939X	-	VRD1939MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D193AX	-	VRD193AMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D193AX	-	VRD193AMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D193BX	-	VRD193BMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D193BX	-	VRD193BMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D193CX	-	VRD193CMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D193CX	-	VRD193CMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D193DX	-	VRD193DMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D193DX	-	VRD193DMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D193EX	-	VRD193EMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D193EX	-	VRD193EMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D193FX	-	VRD193FMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D193FX	-	VRD193FMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D193GX	-	VRD193GMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D193GX	-	VRD193GMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D193HX	-	VRD193HMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D193HX	-	VRD193HMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D193JX	-	VRD193JMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D193JX	-	VRD193JMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D193KX	-	VRD193KMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D193KX	-	VRD193KMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1940X	-	VRD1940MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1940X	-	VRD1940MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1941X	-	VRD1941MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1941X	-	VRD1941MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1942X	-	VRD1942MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1942X	-	VRD1942MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1943X	-	VRD1943MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1943X	-	VRD1943MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1944X	-	VRD1944MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1944X	-	VRD1944MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1945X	-	VRD1945MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1945X	-	VRD1945MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1946X	-	VRD1946MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1946X	-	VRD1946MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1947X	-	VRD1947MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1947X	-	VRD1947MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1948X	-	VRD1948MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1948X	-	VRD1948MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1949X	-	VRD1949MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1949X	-	VRD1949MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D194AX	-	VRD194AMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D194AX	-	VRD194AMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D194BX	-	VRD194BMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D194BX	-	VRD194BMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D194CX	-	VRD194CMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D194CX	-	VRD194CMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D194DX	-	VRD194DMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D194DX	-	VRD194DMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D194EX	-	VRD194EMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D194EX	-	VRD194EMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D194FX	-	VRD194FMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D194FX	-	VRD194FMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D194GX	-	VRD194GMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D194GX	-	VRD194GMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D194HX	-	VRD194HMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D194HX	-	VRD194HMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D194JX	-	VRD194JMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D194JX	-	VRD194JMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D194KX	-	VRD194KMNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D194KX	-	VRD194KMTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1950X	-	VRD1950MNX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1950X	-	VRD1950MTX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D19A	-	R1171S191A	LVR-IC	LDO, 1.9V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D19B	-	R1171S191B	LVR-IC	LDO, 1.9V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D1A08X	-	VRD1A08LNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A08X	-	VRD1A08LTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A09X	-	VRD1A09LNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A09X	-	VRD1A09LTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A0JX	-	VRD1A0JLNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A0JX	-	VRD1A0JLTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A0KX	-	VRD1A0KLNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A0KX	-	VRD1A0KLTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A10X	-	VRD1A10LNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A10X	-	VRD1A10LTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A11X	-	VRD1A11LNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A11X	-	VRD1A11LTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1A12X	-	VRD1A12LNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A12X	-	VRD1A12LTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A13X	-	VRD1A13LNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A13X	-	VRD1A13LTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A14X	-	VRD1A14LNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A14X	-	VRD1A14LTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A15X	-	VRD1A15LNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A15X	-	VRD1A15LTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A16X	-	VRD1A16LNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A16X	-	VRD1A16LTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A17X	-	VRD1A17LNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A17X	-	VRD1A17LTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A18X	-	VRD1A18LNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A18X	-	VRD1A18LTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A19X	-	VRD1A19LNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A19X	-	VRD1A19LTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A1AX	-	VRD1A1ALNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A1AX	-	VRD1A1ALTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A1BX	-	VRD1A1BLNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A1BX	-	VRD1A1BLTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A1CX	-	VRD1A1CLNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A1CX	-	VRD1A1CLTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A1DX	-	VRD1A1DLNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A1DX	-	VRD1A1DLTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A1EX	-	VRD1A1ELNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A1EX	-	VRD1A1ELTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A1FX	-	VRD1A1FLNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A1FX	-	VRD1A1FLTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A1GX	-	VRD1A1GLNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A1GX	-	VRD1A1GLTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A1HX	-	VRD1A1HLNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A1HX	-	VRD1A1HLTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A1JX	-	VRD1A1JLNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A1JX	-	VRD1A1JLTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A1KX	-	VRD1A1KMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A1KX	-	VRD1A1KMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A20X	-	VRD1A20MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A20X	-	VRD1A20MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A21X	-	VRD1A21MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A21X	-	VRD1A21MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A22X	-	VRD1A22MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A22X	-	VRD1A22MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A23X	-	VRD1A23MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A23X	-	VRD1A23MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A24X	-	VRD1A24MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A24X	-	VRD1A24MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A25X	-	VRD1A25MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A25X	-	VRD1A25MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A26X	-	VRD1A26MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A26X	-	VRD1A26MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A27X	-	VRD1A27MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A27X	-	VRD1A27MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A28X	-	VRD1A28MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A28X	-	VRD1A28MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A29X	-	VRD1A29MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A29X	-	VRD1A29MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A2AX	-	VRD1A2AMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A2AX	-	VRD1A2AMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A2BX	-	VRD1A2BMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A2BX	-	VRD1A2BMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A2CX	-	VRD1A2CMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A2CX	-	VRD1A2CMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A2DX	-	VRD1A2DMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A2DX	-	VRD1A2DMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A2EX	-	VRD1A2EMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A2EX	-	VRD1A2EMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A2FX	-	VRD1A2FMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A2FX	-	VRD1A2FMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A2GX	-	VRD1A2GMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A2GX	-	VRD1A2GMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1A2HX	-	VRD1A2HMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A2HX	-	VRD1A2HMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A2JX	-	VRD1A2JMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A2JX	-	VRD1A2JMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A2KX	-	VRD1A2KMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A2KX	-	VRD1A2KMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A30X	-	VRD1A30MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A30X	-	VRD1A30MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A31X	-	VRD1A31MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A31X	-	VRD1A31MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A32X	-	VRD1A32MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A32X	-	VRD1A32MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A33X	-	VRD1A33MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A33X	-	VRD1A33MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A34X	-	VRD1A34MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A34X	-	VRD1A34MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A35X	-	VRD1A35MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A35X	-	VRD1A35MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A36X	-	VRD1A36MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A36X	-	VRD1A36MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A37X	-	VRD1A37MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A37X	-	VRD1A37MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A38X	-	VRD1A38MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A38X	-	VRD1A38MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A39X	-	VRD1A39MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A39X	-	VRD1A39MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A3AX	-	VRD1A3AMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A3AX	-	VRD1A3AMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A3BX	-	VRD1A3BMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A3BX	-	VRD1A3BMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A3CX	-	VRD1A3CMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A3CX	-	VRD1A3CMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A3DX	-	VRD1A3DMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A3DX	-	VRD1A3DMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A3EX	-	VRD1A3EMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A3EX	-	VRD1A3EMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A3FX	-	VRD1A3FMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A3FX	-	VRD1A3FMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A3GX	-	VRD1A3GMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A3GX	-	VRD1A3GMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A3HX	-	VRD1A3HMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A3HX	-	VRD1A3HMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A3JX	-	VRD1A3JMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A3JX	-	VRD1A3JMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A3KX	-	VRD1A3KMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A3KX	-	VRD1A3KMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A40X	-	VRD1A40MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A40X	-	VRD1A40MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A41X	-	VRD1A41MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A41X	-	VRD1A41MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A42X	-	VRD1A42MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A42X	-	VRD1A42MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A43X	-	VRD1A43MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A43X	-	VRD1A43MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A44X	-	VRD1A44MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A44X	-	VRD1A44MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A45X	-	VRD1A45MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A45X	-	VRD1A45MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A46X	-	VRD1A46MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A46X	-	VRD1A46MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A47X	-	VRD1A47MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A47X	-	VRD1A47MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A48X	-	VRD1A48MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A48X	-	VRD1A48MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A49X	-	VRD1A49MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A49X	-	VRD1A49MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A4AX	-	VRD1A4AMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A4AX	-	VRD1A4AMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A4BX	-	VRD1A4BMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A4BX	-	VRD1A4BMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1A4CX	-	VRD1A4CMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A4CX	-	VRD1A4CMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A4DX	-	VRD1A4DMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A4DX	-	VRD1A4DMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A4EX	-	VRD1A4EMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A4EX	-	VRD1A4EMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A4FX	-	VRD1A4FMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A4FX	-	VRD1A4FMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A4GX	-	VRD1A4GMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A4GX	-	VRD1A4GMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A4HX	-	VRD1A4HMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A4HX	-	VRD1A4HMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A4JX	-	VRD1A4JMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A4JX	-	VRD1A4JMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A4KX	-	VRD1A4KMNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A4KX	-	VRD1A4KMTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1A50X	-	VRD1A50MNX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1A50X	-	VRD1A50MTX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B08X	-	VRD1B08LNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B08X	-	VRD1B08LTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B09X	-	VRD1B09LNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B09X	-	VRD1B09LTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B0JX	-	VRD1B0JLNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B0JX	-	VRD1B0JLTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B0KX	-	VRD1B0KLNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B0KX	-	VRD1B0KLTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B10X	-	VRD1B10LNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B10X	-	VRD1B10LTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B11X	-	VRD1B11LNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B11X	-	VRD1B11LTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B12X	-	VRD1B12LNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B12X	-	VRD1B12LTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B13X	-	VRD1B13LNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B13X	-	VRD1B13LTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B14X	-	VRD1B14LNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B14X	-	VRD1B14LTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B15X	-	VRD1B15LNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B15X	-	VRD1B15LTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B16X	-	VRD1B16LNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B16X	-	VRD1B16LTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B17X	-	VRD1B17LNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B17X	-	VRD1B17LTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B18X	-	VRD1B18LNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B18X	-	VRD1B18LTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B19X	-	VRD1B19LNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B19X	-	VRD1B19LTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B1AX	-	VRD1B1ALNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B1AX	-	VRD1B1ALTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B1BX	-	VRD1B1BLNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B1BX	-	VRD1B1BLTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B1CX	-	VRD1B1CLNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B1CX	-	VRD1B1CLTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B1DX	-	VRD1B1DLNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B1DX	-	VRD1B1DLTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B1EX	-	VRD1B1ELNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B1EX	-	VRD1B1ELTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B1FX	-	VRD1B1FLNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B1FX	-	VRD1B1FLTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B1GX	-	VRD1B1GLNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B1GX	-	VRD1B1GLTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B1HX	-	VRD1B1HLNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B1HX	-	VRD1B1HLTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B1JX	-	VRD1B1JLNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B1JX	-	VRD1B1JLTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B1KX	-	VRD1B1KMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B1KX	-	VRD1B1KMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B20X	-	VRD1B20MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B20X	-	VRD1B20MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B21X	-	VRD1B21MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B21X	-	VRD1B21MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1B22X	-	VRD1B22MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B22X	-	VRD1B22MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B23X	-	VRD1B23MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B23X	-	VRD1B23MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B24X	-	VRD1B24MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B24X	-	VRD1B24MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B25X	-	VRD1B25MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B25X	-	VRD1B25MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B26X	-	VRD1B26MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B26X	-	VRD1B26MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B27X	-	VRD1B27MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B27X	-	VRD1B27MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B28X	-	VRD1B28MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B28X	-	VRD1B28MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B29X	-	VRD1B29MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B29X	-	VRD1B29MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B2AX	-	VRD1B2AMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B2AX	-	VRD1B2AMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B2BX	-	VRD1B2BMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B2BX	-	VRD1B2BMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B2CX	-	VRD1B2CMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B2CX	-	VRD1B2CMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B2DX	-	VRD1B2DMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B2DX	-	VRD1B2DMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B2EX	-	VRD1B2EMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B2EX	-	VRD1B2EMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B2FX	-	VRD1B2FMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B2FX	-	VRD1B2FMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B2GX	-	VRD1B2GMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B2GX	-	VRD1B2GMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B2HX	-	VRD1B2HMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B2HX	-	VRD1B2HMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B2JX	-	VRD1B2JMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B2JX	-	VRD1B2JMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B2KX	-	VRD1B2KMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B2KX	-	VRD1B2KMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B30X	-	VRD1B30MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B30X	-	VRD1B30MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B31X	-	VRD1B31MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B31X	-	VRD1B31MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B32X	-	VRD1B32MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B32X	-	VRD1B32MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B33X	-	VRD1B33MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B33X	-	VRD1B33MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B34X	-	VRD1B34MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B34X	-	VRD1B34MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B35X	-	VRD1B35MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B35X	-	VRD1B35MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B36X	-	VRD1B36MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B36X	-	VRD1B36MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B37X	-	VRD1B37MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B37X	-	VRD1B37MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B38X	-	VRD1B38MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B38X	-	VRD1B38MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B39X	-	VRD1B39MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B39X	-	VRD1B39MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B3AX	-	VRD1B3AMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B3AX	-	VRD1B3AMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B3BX	-	VRD1B3BMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B3BX	-	VRD1B3BMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B3CX	-	VRD1B3CMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B3CX	-	VRD1B3CMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B3DX	-	VRD1B3DMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B3DX	-	VRD1B3DMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B3EX	-	VRD1B3EMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B3EX	-	VRD1B3EMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B3FX	-	VRD1B3FMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B3FX	-	VRD1B3FMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B3GX	-	VRD1B3GMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B3GX	-	VRD1B3GMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1B3HX	-	VRD1B3HMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B3HX	-	VRD1B3HMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B3JX	-	VRD1B3JMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B3JX	-	VRD1B3JMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B3KX	-	VRD1B3KMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B3KX	-	VRD1B3KMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B40X	-	VRD1B40MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B40X	-	VRD1B40MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B41X	-	VRD1B41MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B41X	-	VRD1B41MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B42X	-	VRD1B42MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B42X	-	VRD1B42MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B43X	-	VRD1B43MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B43X	-	VRD1B43MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B44X	-	VRD1B44MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B44X	-	VRD1B44MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B45X	-	VRD1B45MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B45X	-	VRD1B45MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B46X	-	VRD1B46MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B46X	-	VRD1B46MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B47X	-	VRD1B47MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B47X	-	VRD1B47MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B48X	-	VRD1B48MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B48X	-	VRD1B48MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B49X	-	VRD1B49MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B49X	-	VRD1B49MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B4AX	-	VRD1B4AMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B4AX	-	VRD1B4AMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B4BX	-	VRD1B4BMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B4BX	-	VRD1B4BMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B4CX	-	VRD1B4CMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B4CX	-	VRD1B4CMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B4DX	-	VRD1B4DMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B4DX	-	VRD1B4DMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B4EX	-	VRD1B4EMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B4EX	-	VRD1B4EMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B4FX	-	VRD1B4FMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B4FX	-	VRD1B4FMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B4GX	-	VRD1B4GMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B4GX	-	VRD1B4GMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B4HX	-	VRD1B4HMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B4HX	-	VRD1B4HMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B4JX	-	VRD1B4JMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B4JX	-	VRD1B4JMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B4KX	-	VRD1B4KMNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B4KX	-	VRD1B4KMTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1B50X	-	VRD1B50MNX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1B50X	-	VRD1B50MTX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C08X	-	VRD1C08LNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C08X	-	VRD1C08LTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C09X	-	VRD1C09LNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C09X	-	VRD1C09LTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C0JX	-	VRD1C0JLNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C0JX	-	VRD1C0JLTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C0KX	-	VRD1C0KLNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C0KX	-	VRD1C0KLTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C10X	-	VRD1C10LNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C10X	-	VRD1C10LTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C11X	-	VRD1C11LNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C11X	-	VRD1C11LTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C12X	-	VRD1C12LNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C12X	-	VRD1C12LTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C13X	-	VRD1C13LNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C13X	-	VRD1C13LTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C14X	-	VRD1C14LNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C14X	-	VRD1C14LTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C15X	-	VRD1C15LNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C15X	-	VRD1C15LTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C16X	-	VRD1C16LNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C16X	-	VRD1C16LTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1C17X	-	VRD1C17LNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C17X	-	VRD1C17LTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C18X	-	VRD1C18LNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C18X	-	VRD1C18LTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C19X	-	VRD1C19LNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C19X	-	VRD1C19LTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C1AX	-	VRD1C1ALNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C1AX	-	VRD1C1ALTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C1BX	-	VRD1C1BLNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C1BX	-	VRD1C1BLTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C1CX	-	VRD1C1CLNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C1CX	-	VRD1C1CLTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C1DX	-	VRD1C1DLNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C1DX	-	VRD1C1DLTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C1EX	-	VRD1C1ELNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C1EX	-	VRD1C1ELTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C1FX	-	VRD1C1FLNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C1FX	-	VRD1C1FLTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C1GX	-	VRD1C1GLNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C1GX	-	VRD1C1GLTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C1HX	-	VRD1C1HLNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C1HX	-	VRD1C1HLTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C1JX	-	VRD1C1JLNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C1JX	-	VRD1C1JLTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C1KX	-	VRD1C1KMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C1KX	-	VRD1C1KMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C20X	-	VRD1C20MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C20X	-	VRD1C20MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C21X	-	VRD1C21MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C21X	-	VRD1C21MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C22X	-	VRD1C22MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C22X	-	VRD1C22MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C23X	-	VRD1C23MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C23X	-	VRD1C23MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C24X	-	VRD1C24MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C24X	-	VRD1C24MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C25X	-	VRD1C25MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C25X	-	VRD1C25MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C26X	-	VRD1C26MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C26X	-	VRD1C26MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C27X	-	VRD1C27MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C27X	-	VRD1C27MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C28X	-	VRD1C28MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C28X	-	VRD1C28MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C29X	-	VRD1C29MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C29X	-	VRD1C29MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C2AX	-	VRD1C2AMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C2AX	-	VRD1C2AMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C2BX	-	VRD1C2BMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C2BX	-	VRD1C2BMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C2CX	-	VRD1C2CMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C2CX	-	VRD1C2CMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C2DX	-	VRD1C2DMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C2DX	-	VRD1C2DMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C2EX	-	VRD1C2EMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C2EX	-	VRD1C2EMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C2FX	-	VRD1C2FMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C2FX	-	VRD1C2FMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C2GX	-	VRD1C2GMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C2GX	-	VRD1C2GMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C2HX	-	VRD1C2HMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C2HX	-	VRD1C2HMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C2JX	-	VRD1C2JMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C2JX	-	VRD1C2JMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C2KX	-	VRD1C2KMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C2KX	-	VRD1C2KMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C30X	-	VRD1C30MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C30X	-	VRD1C30MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C31X	-	VRD1C31MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C31X	-	VRD1C31MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1C32X	-	VRD1C32MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C32X	-	VRD1C32MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C33X	-	VRD1C33MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C33X	-	VRD1C33MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C34X	-	VRD1C34MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C34X	-	VRD1C34MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C35X	-	VRD1C35MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C35X	-	VRD1C35MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C36X	-	VRD1C36MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C36X	-	VRD1C36MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C37X	-	VRD1C37MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C37X	-	VRD1C37MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C38X	-	VRD1C38MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C38X	-	VRD1C38MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C39X	-	VRD1C39MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C39X	-	VRD1C39MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C3AX	-	VRD1C3AMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C3AX	-	VRD1C3AMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C3BX	-	VRD1C3BMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C3BX	-	VRD1C3BMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C3CX	-	VRD1C3CMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C3CX	-	VRD1C3CMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C3DX	-	VRD1C3DMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C3DX	-	VRD1C3DMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C3EX	-	VRD1C3EMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C3EX	-	VRD1C3EMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C3FX	-	VRD1C3FMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C3FX	-	VRD1C3FMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C3GX	-	VRD1C3GMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C3GX	-	VRD1C3GMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C3HX	-	VRD1C3HMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C3HX	-	VRD1C3HMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C3JX	-	VRD1C3JMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C3JX	-	VRD1C3JMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C3KX	-	VRD1C3KMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C3KX	-	VRD1C3KMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C40X	-	VRD1C40MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C40X	-	VRD1C40MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C41X	-	VRD1C41MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C41X	-	VRD1C41MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C42X	-	VRD1C42MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C42X	-	VRD1C42MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C43X	-	VRD1C43MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C43X	-	VRD1C43MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C44X	-	VRD1C44MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C44X	-	VRD1C44MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C45X	-	VRD1C45MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C45X	-	VRD1C45MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C46X	-	VRD1C46MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C46X	-	VRD1C46MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C47X	-	VRD1C47MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C47X	-	VRD1C47MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C48X	-	VRD1C48MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C48X	-	VRD1C48MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C49X	-	VRD1C49MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C49X	-	VRD1C49MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C4AX	-	VRD1C4AMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C4AX	-	VRD1C4AMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C4BX	-	VRD1C4BMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C4BX	-	VRD1C4BMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C4CX	-	VRD1C4CMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C4CX	-	VRD1C4CMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C4DX	-	VRD1C4DMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C4DX	-	VRD1C4DMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C4EX	-	VRD1C4EMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C4EX	-	VRD1C4EMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C4FX	-	VRD1C4FMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C4FX	-	VRD1C4FMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C4GX	-	VRD1C4GMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C4GX	-	VRD1C4GMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1C4HX	-	VRD1C4HMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C4HX	-	VRD1C4HMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C4JX	-	VRD1C4JMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C4JX	-	VRD1C4JMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C4KX	-	VRD1C4KMNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C4KX	-	VRD1C4KMTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1C50X	-	VRD1C50MNX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1C50X	-	VRD1C50MTX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D08X	-	VRD1D08LNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D08X	-	VRD1D08LTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D09X	-	VRD1D09LNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D09X	-	VRD1D09LTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D0JX	-	VRD1D0JLNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D0JX	-	VRD1D0JLTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D0KX	-	VRD1D0KLNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D0KX	-	VRD1D0KLTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D10X	-	VRD1D10LNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D10X	-	VRD1D10LTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D11X	-	VRD1D11LNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D11X	-	VRD1D11LTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D12X	-	VRD1D12LNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D12X	-	VRD1D12LTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D13X	-	VRD1D13LNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D13X	-	VRD1D13LTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D14X	-	VRD1D14LNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D14X	-	VRD1D14LTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D15X	-	VRD1D15LNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D15X	-	VRD1D15LTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D16X	-	VRD1D16LNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D16X	-	VRD1D16LTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D17X	-	VRD1D17LNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D17X	-	VRD1D17LTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D18X	-	VRD1D18LNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D18X	-	VRD1D18LTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D19X	-	VRD1D19LNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D19X	-	VRD1D19LTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D1AX	-	VRD1D1ALNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D1AX	-	VRD1D1ALTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D1BX	-	VRD1D1BLNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D1BX	-	VRD1D1BLTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D1CX	-	VRD1D1CLNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D1CX	-	VRD1D1CLTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D1DX	-	VRD1D1DLNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D1DX	-	VRD1D1DLTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D1EX	-	VRD1D1ELNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D1EX	-	VRD1D1ELTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D1FX	-	VRD1D1FLNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D1FX	-	VRD1D1FLTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D1GX	-	VRD1D1GLNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D1GX	-	VRD1D1GLTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D1HX	-	VRD1D1HLNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D1HX	-	VRD1D1HLTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D1JX	-	VRD1D1JLNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D1JX	-	VRD1D1JLTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D1KX	-	VRD1D1KMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D1KX	-	VRD1D1KMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D20X	-	VRD1D20MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D20X	-	VRD1D20MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D21X	-	VRD1D21MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D21X	-	VRD1D21MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D22X	-	VRD1D22MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D22X	-	VRD1D22MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D23X	-	VRD1D23MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D23X	-	VRD1D23MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D24X	-	VRD1D24MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D24X	-	VRD1D24MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D25X	-	VRD1D25MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D25X	-	VRD1D25MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D26X	-	VRD1D26MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D26X	-	VRD1D26MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1D27X	-	VRD1D27MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D27X	-	VRD1D27MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D28X	-	VRD1D28MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D28X	-	VRD1D28MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D29X	-	VRD1D29MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D29X	-	VRD1D29MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D2AX	-	VRD1D2AMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D2AX	-	VRD1D2AMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D2BX	-	VRD1D2BMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D2BX	-	VRD1D2BMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D2CX	-	VRD1D2CMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D2CX	-	VRD1D2CMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D2DX	-	VRD1D2DMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D2DX	-	VRD1D2DMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D2EX	-	VRD1D2EMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D2EX	-	VRD1D2EMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D2FX	-	VRD1D2FMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D2FX	-	VRD1D2FMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D2GX	-	VRD1D2GMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D2GX	-	VRD1D2GMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D2HX	-	VRD1D2HMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D2HX	-	VRD1D2HMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D2JX	-	VRD1D2JMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D2JX	-	VRD1D2JMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D2KX	-	VRD1D2KMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D2KX	-	VRD1D2KMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D30X	-	VRD1D30MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D30X	-	VRD1D30MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D31X	-	VRD1D31MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D31X	-	VRD1D31MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D32X	-	VRD1D32MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D32X	-	VRD1D32MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D33X	-	VRD1D33MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D33X	-	VRD1D33MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D34X	-	VRD1D34MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D34X	-	VRD1D34MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D35X	-	VRD1D35MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D35X	-	VRD1D35MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D36X	-	VRD1D36MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D36X	-	VRD1D36MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D37X	-	VRD1D37MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D37X	-	VRD1D37MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D38X	-	VRD1D38MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D38X	-	VRD1D38MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D39X	-	VRD1D39MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D39X	-	VRD1D39MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D3AX	-	VRD1D3AMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D3AX	-	VRD1D3AMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D3BX	-	VRD1D3BMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D3BX	-	VRD1D3BMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D3CX	-	VRD1D3CMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D3CX	-	VRD1D3CMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D3DX	-	VRD1D3DMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D3DX	-	VRD1D3DMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D3EX	-	VRD1D3EMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D3EX	-	VRD1D3EMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D3FX	-	VRD1D3FMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D3FX	-	VRD1D3FMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D3GX	-	VRD1D3GMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D3GX	-	VRD1D3GMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D3HX	-	VRD1D3HMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D3HX	-	VRD1D3HMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D3JX	-	VRD1D3JMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D3JX	-	VRD1D3JMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D3KX	-	VRD1D3KMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D3KX	-	VRD1D3KMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D40X	-	VRD1D40MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D40X	-	VRD1D40MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D41X	-	VRD1D41MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D41X	-	VRD1D41MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1D42X	-	VRD1D42MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D42X	-	VRD1D42MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D43X	-	VRD1D43MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D43X	-	VRD1D43MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D44X	-	VRD1D44MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D44X	-	VRD1D44MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D45X	-	VRD1D45MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D45X	-	VRD1D45MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D46X	-	VRD1D46MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D46X	-	VRD1D46MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D47X	-	VRD1D47MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D47X	-	VRD1D47MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D48X	-	VRD1D48MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D48X	-	VRD1D48MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D49X	-	VRD1D49MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D49X	-	VRD1D49MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D4AX	-	VRD1D4AMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D4AX	-	VRD1D4AMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D4BX	-	VRD1D4BMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D4BX	-	VRD1D4BMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D4CX	-	VRD1D4CMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D4CX	-	VRD1D4CMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D4DX	-	VRD1D4DMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D4DX	-	VRD1D4DMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D4EX	-	VRD1D4EMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D4EX	-	VRD1D4EMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D4FX	-	VRD1D4FMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D4FX	-	VRD1D4FMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D4GX	-	VRD1D4GMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D4GX	-	VRD1D4GMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D4HX	-	VRD1D4HMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D4HX	-	VRD1D4HMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D4JX	-	VRD1D4JMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D4JX	-	VRD1D4JMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D4KX	-	VRD1D4KMNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D4KX	-	VRD1D4KMTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1D50X	-	VRD1D50MNX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1D50X	-	VRD1D50MTX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E08X	-	VRD1E08LNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E08X	-	VRD1E08LTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E09X	-	VRD1E09LNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E09X	-	VRD1E09LTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E0JX	-	VRD1E0JLNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E0JX	-	VRD1E0JLTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E0KX	-	VRD1E0KLNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E0KX	-	VRD1E0KLTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E10X	-	VRD1E10LNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E10X	-	VRD1E10LTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E11X	-	VRD1E11LNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E11X	-	VRD1E11LTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E12X	-	VRD1E12LNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E12X	-	VRD1E12LTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E13X	-	VRD1E13LNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E13X	-	VRD1E13LTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E14X	-	VRD1E14LNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E14X	-	VRD1E14LTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E15X	-	VRD1E15LNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E15X	-	VRD1E15LTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E16X	-	VRD1E16LNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E16X	-	VRD1E16LTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E17X	-	VRD1E17LNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E17X	-	VRD1E17LTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E18X	-	VRD1E18LNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E18X	-	VRD1E18LTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E19X	-	VRD1E19LNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E19X	-	VRD1E19LTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E1AX	-	VRD1E1ALNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E1AX	-	VRD1E1ALTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E1BX	-	VRD1E1BLNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E1BX	-	VRD1E1BLTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1E1CX	-	VRD1E1CLNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E1CX	-	VRD1E1CLTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E1DX	-	VRD1E1DLNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E1DX	-	VRD1E1DLTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E1EX	-	VRD1E1ELNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E1EX	-	VRD1E1ELTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E1FX	-	VRD1E1FLNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E1FX	-	VRD1E1FLTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E1GX	-	VRD1E1GLNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E1GX	-	VRD1E1GLTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E1HX	-	VRD1E1HLNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E1HX	-	VRD1E1HLTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E1JX	-	VRD1E1JLNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E1JX	-	VRD1E1JLTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E1KX	-	VRD1E1KMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E1KX	-	VRD1E1KMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E20X	-	VRD1E20MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E20X	-	VRD1E20MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E21X	-	VRD1E21MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E21X	-	VRD1E21MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E22X	-	VRD1E22MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E22X	-	VRD1E22MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E23X	-	VRD1E23MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E23X	-	VRD1E23MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E24X	-	VRD1E24MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E24X	-	VRD1E24MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E25X	-	VRD1E25MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E25X	-	VRD1E25MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E26X	-	VRD1E26MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E26X	-	VRD1E26MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E27X	-	VRD1E27MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E27X	-	VRD1E27MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E28X	-	VRD1E28MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E28X	-	VRD1E28MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E29X	-	VRD1E29MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E29X	-	VRD1E29MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E2AX	-	VRD1E2AMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E2AX	-	VRD1E2AMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E2BX	-	VRD1E2BMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E2BX	-	VRD1E2BMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E2CX	-	VRD1E2CMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E2CX	-	VRD1E2CMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E2DX	-	VRD1E2DMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E2DX	-	VRD1E2DMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E2EX	-	VRD1E2EMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E2EX	-	VRD1E2EMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E2FX	-	VRD1E2FMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E2FX	-	VRD1E2FMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E2GX	-	VRD1E2GMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E2GX	-	VRD1E2GMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E2HX	-	VRD1E2HMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E2HX	-	VRD1E2HMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E2JX	-	VRD1E2JMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E2JX	-	VRD1E2JMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E2KX	-	VRD1E2KMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E2KX	-	VRD1E2KMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E30X	-	VRD1E30MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E30X	-	VRD1E30MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E31X	-	VRD1E31MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E31X	-	VRD1E31MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E32X	-	VRD1E32MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E32X	-	VRD1E32MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E33X	-	VRD1E33MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E33X	-	VRD1E33MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E34X	-	VRD1E34MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E34X	-	VRD1E34MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E35X	-	VRD1E35MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E35X	-	VRD1E35MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E36X	-	VRD1E36MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E36X	-	VRD1E36MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1E37X	-	VRD1E37MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E37X	-	VRD1E37MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E38X	-	VRD1E38MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E38X	-	VRD1E38MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E39X	-	VRD1E39MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E39X	-	VRD1E39MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E3AX	-	VRD1E3AMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E3AX	-	VRD1E3AMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E3BX	-	VRD1E3BMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E3BX	-	VRD1E3BMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E3CX	-	VRD1E3CMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E3CX	-	VRD1E3CMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E3DX	-	VRD1E3DMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E3DX	-	VRD1E3DMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E3EX	-	VRD1E3EMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E3EX	-	VRD1E3EMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E3FX	-	VRD1E3FMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E3FX	-	VRD1E3FMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E3GX	-	VRD1E3GMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E3GX	-	VRD1E3GMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E3HX	-	VRD1E3HMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E3HX	-	VRD1E3HMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E3JX	-	VRD1E3JMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E3JX	-	VRD1E3JMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E3KX	-	VRD1E3KMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E3KX	-	VRD1E3KMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E40X	-	VRD1E40MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E40X	-	VRD1E40MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E41X	-	VRD1E41MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E41X	-	VRD1E41MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E42X	-	VRD1E42MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E42X	-	VRD1E42MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E43X	-	VRD1E43MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E43X	-	VRD1E43MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E44X	-	VRD1E44MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E44X	-	VRD1E44MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E45X	-	VRD1E45MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E45X	-	VRD1E45MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E46X	-	VRD1E46MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E46X	-	VRD1E46MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E47X	-	VRD1E47MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E47X	-	VRD1E47MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E48X	-	VRD1E48MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E48X	-	VRD1E48MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E49X	-	VRD1E49MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E49X	-	VRD1E49MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E4AX	-	VRD1E4AMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E4AX	-	VRD1E4AMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E4BX	-	VRD1E4BMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E4BX	-	VRD1E4BMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E4CX	-	VRD1E4CMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E4CX	-	VRD1E4CMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E4DX	-	VRD1E4DMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E4DX	-	VRD1E4DMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E4EX	-	VRD1E4EMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E4EX	-	VRD1E4EMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E4FX	-	VRD1E4FMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E4FX	-	VRD1E4FMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E4GX	-	VRD1E4GMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E4GX	-	VRD1E4GMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E4HX	-	VRD1E4HMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E4HX	-	VRD1E4HMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E4JX	-	VRD1E4JMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E4JX	-	VRD1E4JMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E4KX	-	VRD1E4KMNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E4KX	-	VRD1E4KMTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1E50X	-	VRD1E50MNX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1E50X	-	VRD1E50MTX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F08X	-	VRD1F08LNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F08X	-	VRD1F08LTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1F09X	-	VRD1F09LNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F09X	-	VRD1F09LTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F0JX	-	VRD1F0JLNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F0JX	-	VRD1F0JLTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F0KX	-	VRD1F0KLNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F0KX	-	VRD1F0KLTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F10X	-	VRD1F10LNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F10X	-	VRD1F10LTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F11X	-	VRD1F11LNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F11X	-	VRD1F11LTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F12X	-	VRD1F12LNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F12X	-	VRD1F12LTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F13X	-	VRD1F13LNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F13X	-	VRD1F13LTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F14X	-	VRD1F14LNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F14X	-	VRD1F14LTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F15X	-	VRD1F15LNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F15X	-	VRD1F15LTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F16X	-	VRD1F16LNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F16X	-	VRD1F16LTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F17X	-	VRD1F17LNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F17X	-	VRD1F17LTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F18X	-	VRD1F18LNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F18X	-	VRD1F18LTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F19X	-	VRD1F19LNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F19X	-	VRD1F19LTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F1AX	-	VRD1F1ALNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F1AX	-	VRD1F1ALTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F1BX	-	VRD1F1BLNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F1BX	-	VRD1F1BLTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F1CX	-	VRD1F1CLNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F1CX	-	VRD1F1CLTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F1DX	-	VRD1F1DLNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F1DX	-	VRD1F1DLTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F1EX	-	VRD1F1ELNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F1EX	-	VRD1F1ELTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F1FX	-	VRD1F1FLNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F1FX	-	VRD1F1FLTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F1GX	-	VRD1F1GLNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F1GX	-	VRD1F1GLTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F1HX	-	VRD1F1HLNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F1HX	-	VRD1F1HLTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F1JX	-	VRD1F1JLNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F1JX	-	VRD1F1JLTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F1KX	-	VRD1F1KMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F1KX	-	VRD1F1KMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F20X	-	VRD1F20MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F20X	-	VRD1F20MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F21X	-	VRD1F21MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F21X	-	VRD1F21MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F22X	-	VRD1F22MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F22X	-	VRD1F22MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F23X	-	VRD1F23MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F23X	-	VRD1F23MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F24X	-	VRD1F24MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F24X	-	VRD1F24MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F25X	-	VRD1F25MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F25X	-	VRD1F25MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F26X	-	VRD1F26MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F26X	-	VRD1F26MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F27X	-	VRD1F27MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F27X	-	VRD1F27MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F28X	-	VRD1F28MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F28X	-	VRD1F28MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F29X	-	VRD1F29MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F29X	-	VRD1F29MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F2AX	-	VRD1F2AMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F2AX	-	VRD1F2AMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F2BX	-	VRD1F2BMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F2BX	-	VRD1F2BMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1F2CX	-	VRD1F2CMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F2CX	-	VRD1F2CMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F2DX	-	VRD1F2DMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F2DX	-	VRD1F2DMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F2EX	-	VRD1F2EMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F2EX	-	VRD1F2EMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F2FX	-	VRD1F2FMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F2FX	-	VRD1F2FMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F2GX	-	VRD1F2GMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F2GX	-	VRD1F2GMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F2HX	-	VRD1F2HMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F2HX	-	VRD1F2HMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F2JX	-	VRD1F2JMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F2JX	-	VRD1F2JMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F2KX	-	VRD1F2KMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F2KX	-	VRD1F2KMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F30X	-	VRD1F30MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F30X	-	VRD1F30MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F31X	-	VRD1F31MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F31X	-	VRD1F31MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F32X	-	VRD1F32MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F32X	-	VRD1F32MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F33X	-	VRD1F33MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F33X	-	VRD1F33MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F34X	-	VRD1F34MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F34X	-	VRD1F34MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F35X	-	VRD1F35MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F35X	-	VRD1F35MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F36X	-	VRD1F36MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F36X	-	VRD1F36MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F37X	-	VRD1F37MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F37X	-	VRD1F37MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F38X	-	VRD1F38MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F38X	-	VRD1F38MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F39X	-	VRD1F39MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F39X	-	VRD1F39MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F3AX	-	VRD1F3AMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F3AX	-	VRD1F3AMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F3BX	-	VRD1F3BMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F3BX	-	VRD1F3BMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F3CX	-	VRD1F3CMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F3CX	-	VRD1F3CMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F3DX	-	VRD1F3DMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F3DX	-	VRD1F3DMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F3EX	-	VRD1F3EMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F3EX	-	VRD1F3EMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F3FX	-	VRD1F3FMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F3FX	-	VRD1F3FMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F3GX	-	VRD1F3GMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F3GX	-	VRD1F3GMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F3HX	-	VRD1F3HMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F3HX	-	VRD1F3HMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F3JX	-	VRD1F3JMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F3JX	-	VRD1F3JMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F3KX	-	VRD1F3KMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F3KX	-	VRD1F3KMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F40X	-	VRD1F40MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F40X	-	VRD1F40MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F41X	-	VRD1F41MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F41X	-	VRD1F41MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F42X	-	VRD1F42MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F42X	-	VRD1F42MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F43X	-	VRD1F43MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F43X	-	VRD1F43MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F44X	-	VRD1F44MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F44X	-	VRD1F44MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F45X	-	VRD1F45MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F45X	-	VRD1F45MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F46X	-	VRD1F46MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F46X	-	VRD1F46MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1F47X	-	VRD1F47MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F47X	-	VRD1F47MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F48X	-	VRD1F48MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F48X	-	VRD1F48MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F49X	-	VRD1F49MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F49X	-	VRD1F49MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F4AX	-	VRD1F4AMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F4AX	-	VRD1F4AMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F4BX	-	VRD1F4BMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F4BX	-	VRD1F4BMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F4CX	-	VRD1F4CMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F4CX	-	VRD1F4CMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F4DX	-	VRD1F4DMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F4DX	-	VRD1F4DMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F4EX	-	VRD1F4EMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F4EX	-	VRD1F4EMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F4FX	-	VRD1F4FMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F4FX	-	VRD1F4FMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F4GX	-	VRD1F4GMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F4GX	-	VRD1F4GMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F4HX	-	VRD1F4HMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F4HX	-	VRD1F4HMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F4JX	-	VRD1F4JMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F4JX	-	VRD1F4JMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F4KX	-	VRD1F4KMNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F4KX	-	VRD1F4KMTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1F50X	-	VRD1F50MNX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1F50X	-	VRD1F50MTX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G08X	-	VRD1G08LNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G08X	-	VRD1G08LTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G09X	-	VRD1G09LNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G09X	-	VRD1G09LTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G0JX	-	VRD1G0JLNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G0JX	-	VRD1G0JLTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G0KX	-	VRD1G0KLNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G0KX	-	VRD1G0KLTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G10X	-	VRD1G10LNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G10X	-	VRD1G10LTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G11X	-	VRD1G11LNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G11X	-	VRD1G11LTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G12X	-	VRD1G12LNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G12X	-	VRD1G12LTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G13X	-	VRD1G13LNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G13X	-	VRD1G13LTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G14X	-	VRD1G14LNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G14X	-	VRD1G14LTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G15X	-	VRD1G15LNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G15X	-	VRD1G15LTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G16X	-	VRD1G16LNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G16X	-	VRD1G16LTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G17X	-	VRD1G17LNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G17X	-	VRD1G17LTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G18X	-	VRD1G18LNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G18X	-	VRD1G18LTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G19X	-	VRD1G19LNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G19X	-	VRD1G19LTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G1AX	-	VRD1G1ALNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G1AX	-	VRD1G1ALTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G1BX	-	VRD1G1BLNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G1BX	-	VRD1G1BLTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G1CX	-	VRD1G1CLNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G1CX	-	VRD1G1CLTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G1DX	-	VRD1G1DLNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G1DX	-	VRD1G1DLTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G1EX	-	VRD1G1ELNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G1EX	-	VRD1G1ELTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G1FX	-	VRD1G1FLNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G1FX	-	VRD1G1FLTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G1GX	-	VRD1G1GLNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G1GX	-	VRD1G1GLTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1G1HX	-	VRD1G1HLNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G1HX	-	VRD1G1HLTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G1JX	-	VRD1G1JLNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G1JX	-	VRD1G1JLTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G1KX	-	VRD1G1KMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G1KX	-	VRD1G1KMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G20X	-	VRD1G20MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G20X	-	VRD1G20MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G21X	-	VRD1G21MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G21X	-	VRD1G21MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G22X	-	VRD1G22MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G22X	-	VRD1G22MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G23X	-	VRD1G23MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G23X	-	VRD1G23MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G24X	-	VRD1G24MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G24X	-	VRD1G24MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G25X	-	VRD1G25MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G25X	-	VRD1G25MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G26X	-	VRD1G26MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G26X	-	VRD1G26MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G27X	-	VRD1G27MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G27X	-	VRD1G27MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G28X	-	VRD1G28MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G28X	-	VRD1G28MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G29X	-	VRD1G29MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G29X	-	VRD1G29MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G2AX	-	VRD1G2AMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G2AX	-	VRD1G2AMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G2BX	-	VRD1G2BMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G2BX	-	VRD1G2BMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G2CX	-	VRD1G2CMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G2CX	-	VRD1G2CMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G2DX	-	VRD1G2DMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G2DX	-	VRD1G2DMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G2EX	-	VRD1G2EMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G2EX	-	VRD1G2EMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G2FX	-	VRD1G2FMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G2FX	-	VRD1G2FMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G2GX	-	VRD1G2GMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G2GX	-	VRD1G2GMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G2HX	-	VRD1G2HMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G2HX	-	VRD1G2HMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G2JX	-	VRD1G2JMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G2JX	-	VRD1G2JMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G2KX	-	VRD1G2KMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G2KX	-	VRD1G2KMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G30X	-	VRD1G30MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G30X	-	VRD1G30MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G31X	-	VRD1G31MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G31X	-	VRD1G31MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G32X	-	VRD1G32MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G32X	-	VRD1G32MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G33X	-	VRD1G33MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G33X	-	VRD1G33MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G34X	-	VRD1G34MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G34X	-	VRD1G34MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G35X	-	VRD1G35MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G35X	-	VRD1G35MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G36X	-	VRD1G36MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G36X	-	VRD1G36MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G37X	-	VRD1G37MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G37X	-	VRD1G37MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G38X	-	VRD1G38MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G38X	-	VRD1G38MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G39X	-	VRD1G39MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G39X	-	VRD1G39MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G3AX	-	VRD1G3AMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G3AX	-	VRD1G3AMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G3BX	-	VRD1G3BMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G3BX	-	VRD1G3BMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1G3CX	-	VRD1G3CMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G3CX	-	VRD1G3CMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G3DX	-	VRD1G3DMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G3DX	-	VRD1G3DMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G3EX	-	VRD1G3EMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G3EX	-	VRD1G3EMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G3FX	-	VRD1G3FMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G3FX	-	VRD1G3FMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G3GX	-	VRD1G3GMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G3GX	-	VRD1G3GMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G3HX	-	VRD1G3HMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G3HX	-	VRD1G3HMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G3JX	-	VRD1G3JMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G3JX	-	VRD1G3JMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G3KX	-	VRD1G3KMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G3KX	-	VRD1G3KMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G40X	-	VRD1G40MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G40X	-	VRD1G40MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G41X	-	VRD1G41MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G41X	-	VRD1G41MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G42X	-	VRD1G42MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G42X	-	VRD1G42MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G43X	-	VRD1G43MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G43X	-	VRD1G43MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G44X	-	VRD1G44MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G44X	-	VRD1G44MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G45X	-	VRD1G45MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G45X	-	VRD1G45MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G46X	-	VRD1G46MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G46X	-	VRD1G46MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G47X	-	VRD1G47MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G47X	-	VRD1G47MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G48X	-	VRD1G48MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G48X	-	VRD1G48MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G49X	-	VRD1G49MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G49X	-	VRD1G49MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G4AX	-	VRD1G4AMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G4AX	-	VRD1G4AMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G4BX	-	VRD1G4BMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G4BX	-	VRD1G4BMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G4CX	-	VRD1G4CMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G4CX	-	VRD1G4CMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G4DX	-	VRD1G4DMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G4DX	-	VRD1G4DMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G4EX	-	VRD1G4EMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G4EX	-	VRD1G4EMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G4FX	-	VRD1G4FMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G4FX	-	VRD1G4FMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G4GX	-	VRD1G4GMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G4GX	-	VRD1G4GMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G4HX	-	VRD1G4HMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G4HX	-	VRD1G4HMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G4JX	-	VRD1G4JMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G4JX	-	VRD1G4JMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G4KX	-	VRD1G4KMNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G4KX	-	VRD1G4KMTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1G50X	-	VRD1G50MNX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1G50X	-	VRD1G50MTX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H08X	-	VRD1H08LNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H08X	-	VRD1H08LTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H09X	-	VRD1H09LNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H09X	-	VRD1H09LTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H0JX	-	VRD1H0JLNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H0JX	-	VRD1H0JLTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H0KX	-	VRD1H0KLNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H0KX	-	VRD1H0KLTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H10X	-	VRD1H10LNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H10X	-	VRD1H10LTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H11X	-	VRD1H11LNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H11X	-	VRD1H11LTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1H12X	-	VRD1H12LNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H12X	-	VRD1H12LTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H13X	-	VRD1H13LNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H13X	-	VRD1H13LTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H14X	-	VRD1H14LNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H14X	-	VRD1H14LTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H15X	-	VRD1H15LNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H15X	-	VRD1H15LTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H16X	-	VRD1H16LNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H16X	-	VRD1H16LTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H17X	-	VRD1H17LNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H17X	-	VRD1H17LTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H18X	-	VRD1H18LNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H18X	-	VRD1H18LTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H19X	-	VRD1H19LNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H19X	-	VRD1H19LTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H1AX	-	VRD1H1ALNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H1AX	-	VRD1H1ALTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H1BX	-	VRD1H1BLNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H1BX	-	VRD1H1BLTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H1CX	-	VRD1H1CLNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H1CX	-	VRD1H1CLTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H1DX	-	VRD1H1DLNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H1DX	-	VRD1H1DLTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H1EX	-	VRD1H1ELNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H1EX	-	VRD1H1ELTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H1FX	-	VRD1H1FLNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H1FX	-	VRD1H1FLTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H1GX	-	VRD1H1GLNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H1GX	-	VRD1H1GLTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H1HX	-	VRD1H1HLNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H1HX	-	VRD1H1HLTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H1JX	-	VRD1H1JLNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H1JX	-	VRD1H1JLTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H1KX	-	VRD1H1KMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H1KX	-	VRD1H1KMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H20X	-	VRD1H20MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H20X	-	VRD1H20MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H21X	-	VRD1H21MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H21X	-	VRD1H21MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H22X	-	VRD1H22MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H22X	-	VRD1H22MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H23X	-	VRD1H23MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H23X	-	VRD1H23MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H24X	-	VRD1H24MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H24X	-	VRD1H24MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H25X	-	VRD1H25MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H25X	-	VRD1H25MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H26X	-	VRD1H26MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H26X	-	VRD1H26MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H27X	-	VRD1H27MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H27X	-	VRD1H27MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H28X	-	VRD1H28MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H28X	-	VRD1H28MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H29X	-	VRD1H29MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H29X	-	VRD1H29MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H2AX	-	VRD1H2AMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H2AX	-	VRD1H2AMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H2BX	-	VRD1H2BMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H2BX	-	VRD1H2BMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H2CX	-	VRD1H2CMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H2CX	-	VRD1H2CMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H2DX	-	VRD1H2DMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H2DX	-	VRD1H2DMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H2EX	-	VRD1H2EMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H2EX	-	VRD1H2EMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H2FX	-	VRD1H2FMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H2FX	-	VRD1H2FMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H2GX	-	VRD1H2GMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H2GX	-	VRD1H2GMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1H2HX	-	VRD1H2HMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H2HX	-	VRD1H2HMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H2JX	-	VRD1H2JMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H2JX	-	VRD1H2JMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H2KX	-	VRD1H2KMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H2KX	-	VRD1H2KMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H30X	-	VRD1H30MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H30X	-	VRD1H30MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H31X	-	VRD1H31MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H31X	-	VRD1H31MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H32X	-	VRD1H32MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H32X	-	VRD1H32MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H33X	-	VRD1H33MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H33X	-	VRD1H33MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H34X	-	VRD1H34MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H34X	-	VRD1H34MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H35X	-	VRD1H35MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H35X	-	VRD1H35MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H36X	-	VRD1H36MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H36X	-	VRD1H36MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H37X	-	VRD1H37MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H37X	-	VRD1H37MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H38X	-	VRD1H38MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H38X	-	VRD1H38MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H39X	-	VRD1H39MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H39X	-	VRD1H39MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H3AX	-	VRD1H3AMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H3AX	-	VRD1H3AMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H3BX	-	VRD1H3BMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H3BX	-	VRD1H3BMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H3CX	-	VRD1H3CMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H3CX	-	VRD1H3CMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H3DX	-	VRD1H3DMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H3DX	-	VRD1H3DMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H3EX	-	VRD1H3EMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H3EX	-	VRD1H3EMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H3FX	-	VRD1H3FMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H3FX	-	VRD1H3FMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H3GX	-	VRD1H3GMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H3GX	-	VRD1H3GMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H3HX	-	VRD1H3HMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H3HX	-	VRD1H3HMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H3JX	-	VRD1H3JMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H3JX	-	VRD1H3JMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H3KX	-	VRD1H3KMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H3KX	-	VRD1H3KMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H40X	-	VRD1H40MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H40X	-	VRD1H40MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H41X	-	VRD1H41MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H41X	-	VRD1H41MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H42X	-	VRD1H42MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H42X	-	VRD1H42MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H43X	-	VRD1H43MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H43X	-	VRD1H43MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H44X	-	VRD1H44MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H44X	-	VRD1H44MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H45X	-	VRD1H45MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H45X	-	VRD1H45MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H46X	-	VRD1H46MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H46X	-	VRD1H46MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H47X	-	VRD1H47MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H47X	-	VRD1H47MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H48X	-	VRD1H48MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H48X	-	VRD1H48MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H49X	-	VRD1H49MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H49X	-	VRD1H49MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H4AX	-	VRD1H4AMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H4AX	-	VRD1H4AMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H4BX	-	VRD1H4BMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H4BX	-	VRD1H4BMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1H4CX	-	VRD1H4CMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H4CX	-	VRD1H4CMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H4DX	-	VRD1H4DMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H4DX	-	VRD1H4DMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H4EX	-	VRD1H4EMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H4EX	-	VRD1H4EMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H4FX	-	VRD1H4FMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H4FX	-	VRD1H4FMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H4GX	-	VRD1H4GMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H4GX	-	VRD1H4GMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H4HX	-	VRD1H4HMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H4HX	-	VRD1H4HMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H4JX	-	VRD1H4JMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H4JX	-	VRD1H4JMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H4KX	-	VRD1H4KMNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H4KX	-	VRD1H4KMTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1H50X	-	VRD1H50MNX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1H50X	-	VRD1H50MTX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J08X	-	VRD1J08LNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J08X	-	VRD1J08LTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J09X	-	VRD1J09LNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J09X	-	VRD1J09LTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J0JX	-	VRD1J0JLNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J0JX	-	VRD1J0JLTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J0KX	-	VRD1J0KLNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J0KX	-	VRD1J0KLTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J10X	-	VRD1J10LNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J10X	-	VRD1J10LTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J11X	-	VRD1J11LNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J11X	-	VRD1J11LTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J12X	-	VRD1J12LNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J12X	-	VRD1J12LTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J13X	-	VRD1J13LNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J13X	-	VRD1J13LTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J14X	-	VRD1J14LNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J14X	-	VRD1J14LTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J15X	-	VRD1J15LNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J15X	-	VRD1J15LTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J16X	-	VRD1J16LNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J16X	-	VRD1J16LTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J17X	-	VRD1J17LNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J17X	-	VRD1J17LTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J18X	-	VRD1J18LNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J18X	-	VRD1J18LTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J19X	-	VRD1J19LNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J19X	-	VRD1J19LTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J1AX	-	VRD1J1ALNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J1AX	-	VRD1J1ALTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J1BX	-	VRD1J1BLNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J1BX	-	VRD1J1BLTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J1CX	-	VRD1J1CLNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J1CX	-	VRD1J1CLTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J1DX	-	VRD1J1DLNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J1DX	-	VRD1J1DLTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J1EX	-	VRD1J1ELNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J1EX	-	VRD1J1ELTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J1FX	-	VRD1J1FLNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J1FX	-	VRD1J1FLTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J1GX	-	VRD1J1GLNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J1GX	-	VRD1J1GLTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J1HX	-	VRD1J1HLNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J1HX	-	VRD1J1HLTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J1JX	-	VRD1J1JLNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J1JX	-	VRD1J1JLTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J1KX	-	VRD1J1KMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J1KX	-	VRD1J1KMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J20X	-	VRD1J20MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J20X	-	VRD1J20MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J21X	-	VRD1J21MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J21X	-	VRD1J21MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1J22X	-	VRD1J22MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J22X	-	VRD1J22MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J23X	-	VRD1J23MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J23X	-	VRD1J23MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J24X	-	VRD1J24MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J24X	-	VRD1J24MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J25X	-	VRD1J25MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J25X	-	VRD1J25MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J26X	-	VRD1J26MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J26X	-	VRD1J26MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J27X	-	VRD1J27MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J27X	-	VRD1J27MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J28X	-	VRD1J28MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J28X	-	VRD1J28MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J29X	-	VRD1J29MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J29X	-	VRD1J29MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J2AX	-	VRD1J2AMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J2AX	-	VRD1J2AMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J2BX	-	VRD1J2BMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J2BX	-	VRD1J2BMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J2CX	-	VRD1J2CMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J2CX	-	VRD1J2CMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J2DX	-	VRD1J2DMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J2DX	-	VRD1J2DMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J2EX	-	VRD1J2EMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J2EX	-	VRD1J2EMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J2FX	-	VRD1J2FMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J2FX	-	VRD1J2FMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J2GX	-	VRD1J2GMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J2GX	-	VRD1J2GMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J2HX	-	VRD1J2HMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J2HX	-	VRD1J2HMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J2JX	-	VRD1J2JMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J2JX	-	VRD1J2JMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J2KX	-	VRD1J2KMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J2KX	-	VRD1J2KMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J30X	-	VRD1J30MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J30X	-	VRD1J30MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J31X	-	VRD1J31MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J31X	-	VRD1J31MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J32X	-	VRD1J32MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J32X	-	VRD1J32MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J33X	-	VRD1J33MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J33X	-	VRD1J33MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J34X	-	VRD1J34MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J34X	-	VRD1J34MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J35X	-	VRD1J35MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J35X	-	VRD1J35MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J36X	-	VRD1J36MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J36X	-	VRD1J36MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J37X	-	VRD1J37MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J37X	-	VRD1J37MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J38X	-	VRD1J38MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J38X	-	VRD1J38MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J39X	-	VRD1J39MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J39X	-	VRD1J39MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J3AX	-	VRD1J3AMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J3AX	-	VRD1J3AMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J3BX	-	VRD1J3BMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J3BX	-	VRD1J3BMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J3CX	-	VRD1J3CMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J3CX	-	VRD1J3CMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J3DX	-	VRD1J3DMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J3DX	-	VRD1J3DMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J3EX	-	VRD1J3EMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J3EX	-	VRD1J3EMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J3FX	-	VRD1J3FMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J3FX	-	VRD1J3FMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J3GX	-	VRD1J3GMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J3GX	-	VRD1J3GMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1J3HX	-	VRD1J3HMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J3HX	-	VRD1J3HMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J3JX	-	VRD1J3JMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J3JX	-	VRD1J3JMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J3KX	-	VRD1J3KMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J3KX	-	VRD1J3KMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J40X	-	VRD1J40MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J40X	-	VRD1J40MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J41X	-	VRD1J41MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J41X	-	VRD1J41MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J42X	-	VRD1J42MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J42X	-	VRD1J42MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J43X	-	VRD1J43MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J43X	-	VRD1J43MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J44X	-	VRD1J44MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J44X	-	VRD1J44MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J45X	-	VRD1J45MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J45X	-	VRD1J45MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J46X	-	VRD1J46MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J46X	-	VRD1J46MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J47X	-	VRD1J47MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J47X	-	VRD1J47MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J48X	-	VRD1J48MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J48X	-	VRD1J48MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J49X	-	VRD1J49MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J49X	-	VRD1J49MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J4AX	-	VRD1J4AMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J4AX	-	VRD1J4AMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J4BX	-	VRD1J4BMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J4BX	-	VRD1J4BMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J4CX	-	VRD1J4CMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J4CX	-	VRD1J4CMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J4DX	-	VRD1J4DMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J4DX	-	VRD1J4DMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J4EX	-	VRD1J4EMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J4EX	-	VRD1J4EMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J4FX	-	VRD1J4FMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J4FX	-	VRD1J4FMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J4GX	-	VRD1J4GMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J4GX	-	VRD1J4GMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J4HX	-	VRD1J4HMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J4HX	-	VRD1J4HMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J4JX	-	VRD1J4JMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J4JX	-	VRD1J4JMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J4KX	-	VRD1J4KMNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J4KX	-	VRD1J4KMTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1J50X	-	VRD1J50MNX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1J50X	-	VRD1J50MTX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K08X	-	VRD1K08NNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K08X	-	VRD1K08NTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K09X	-	VRD1K09NNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K09X	-	VRD1K09NTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K0JX	-	VRD1K0JNNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K0JX	-	VRD1K0JNTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K0KX	-	VRD1K0KNNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K0KX	-	VRD1K0KNTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K10X	-	VRD1K10NNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K10X	-	VRD1K10NTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K11X	-	VRD1K11NNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K11X	-	VRD1K11NTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K12X	-	VRD1K12NNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K12X	-	VRD1K12NTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K13X	-	VRD1K13NNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K13X	-	VRD1K13NTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K14X	-	VRD1K14NNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K14X	-	VRD1K14NTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K15X	-	VRD1K15NNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K15X	-	VRD1K15NTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K16X	-	VRD1K16NNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K16X	-	VRD1K16NTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1K17X	-	VRD1K17NNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K17X	-	VRD1K17NTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K18X	-	VRD1K18NNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K18X	-	VRD1K18NTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K19X	-	VRD1K19NNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K19X	-	VRD1K19NTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K1AX	-	VRD1K1ANNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K1AX	-	VRD1K1ANTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K1BX	-	VRD1K1BNNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K1BX	-	VRD1K1BNTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K1CX	-	VRD1K1CNNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K1CX	-	VRD1K1CNTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K1DX	-	VRD1K1DNNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K1DX	-	VRD1K1DNTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K1EX	-	VRD1K1ENNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K1EX	-	VRD1K1ENTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K1FX	-	VRD1K1FNNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K1FX	-	VRD1K1FNTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K1GX	-	VRD1K1GNNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K1GX	-	VRD1K1GNTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K1HX	-	VRD1K1HNNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K1HX	-	VRD1K1HNTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K1JX	-	VRD1K1JNNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K1JX	-	VRD1K1JNTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K1KX	-	VRD1K1KPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K1KX	-	VRD1K1KPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K20X	-	VRD1K20PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K20X	-	VRD1K20PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K21X	-	VRD1K21PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K21X	-	VRD1K21PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K22X	-	VRD1K22PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K22X	-	VRD1K22PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K23X	-	VRD1K23PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K23X	-	VRD1K23PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K24X	-	VRD1K24PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K24X	-	VRD1K24PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K25X	-	VRD1K25PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K25X	-	VRD1K25PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K26X	-	VRD1K26PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K26X	-	VRD1K26PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K27X	-	VRD1K27PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K27X	-	VRD1K27PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K28X	-	VRD1K28PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K28X	-	VRD1K28PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K29X	-	VRD1K29PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K29X	-	VRD1K29PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K2AX	-	VRD1K2APNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K2AX	-	VRD1K2APTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K2BX	-	VRD1K2BPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K2BX	-	VRD1K2BPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K2CX	-	VRD1K2CPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K2CX	-	VRD1K2CPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K2DX	-	VRD1K2DPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K2DX	-	VRD1K2DPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K2EX	-	VRD1K2EPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K2EX	-	VRD1K2EPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K2FX	-	VRD1K2FPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K2FX	-	VRD1K2FPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K2GX	-	VRD1K2GPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K2GX	-	VRD1K2GPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K2HX	-	VRD1K2HPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K2HX	-	VRD1K2HPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K2JX	-	VRD1K2JPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K2JX	-	VRD1K2JPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K2KX	-	VRD1K2KPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K2KX	-	VRD1K2KPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K30X	-	VRD1K30PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K30X	-	VRD1K30PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K31X	-	VRD1K31PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K31X	-	VRD1K31PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1K32X	-	VRD1K32PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K32X	-	VRD1K32PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K33X	-	VRD1K33PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K33X	-	VRD1K33PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K34X	-	VRD1K34PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K34X	-	VRD1K34PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K35X	-	VRD1K35PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K35X	-	VRD1K35PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K36X	-	VRD1K36PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K36X	-	VRD1K36PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K37X	-	VRD1K37PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K37X	-	VRD1K37PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K38X	-	VRD1K38PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K38X	-	VRD1K38PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K39X	-	VRD1K39PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K39X	-	VRD1K39PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K3AX	-	VRD1K3APNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K3AX	-	VRD1K3APTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K3BX	-	VRD1K3BPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K3BX	-	VRD1K3BPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K3CX	-	VRD1K3CPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K3CX	-	VRD1K3CPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K3DX	-	VRD1K3DPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K3DX	-	VRD1K3DPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K3EX	-	VRD1K3EPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K3EX	-	VRD1K3EPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K3FX	-	VRD1K3FPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K3FX	-	VRD1K3FPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K3GX	-	VRD1K3GPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K3GX	-	VRD1K3GPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K3HX	-	VRD1K3HPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K3HX	-	VRD1K3HPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K3JX	-	VRD1K3JPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K3JX	-	VRD1K3JPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K3KX	-	VRD1K3KPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K3KX	-	VRD1K3KPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K40X	-	VRD1K40PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K40X	-	VRD1K40PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K41X	-	VRD1K41PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K41X	-	VRD1K41PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K42X	-	VRD1K42PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K42X	-	VRD1K42PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K43X	-	VRD1K43PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K43X	-	VRD1K43PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K44X	-	VRD1K44PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K44X	-	VRD1K44PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K45X	-	VRD1K45PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K45X	-	VRD1K45PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K46X	-	VRD1K46PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K46X	-	VRD1K46PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K47X	-	VRD1K47PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K47X	-	VRD1K47PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K48X	-	VRD1K48PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K48X	-	VRD1K48PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K49X	-	VRD1K49PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K49X	-	VRD1K49PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K4AX	-	VRD1K4APNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K4AX	-	VRD1K4APTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K4BX	-	VRD1K4BPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K4BX	-	VRD1K4BPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K4CX	-	VRD1K4CPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K4CX	-	VRD1K4CPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K4DX	-	VRD1K4DPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K4DX	-	VRD1K4DPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K4EX	-	VRD1K4EPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K4EX	-	VRD1K4EPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K4FX	-	VRD1K4FPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K4FX	-	VRD1K4FPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K4GX	-	VRD1K4GPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K4GX	-	VRD1K4GPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1K4HX	-	VRD1K4HPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K4HX	-	VRD1K4HPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K4JX	-	VRD1K4JPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K4JX	-	VRD1K4JPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K4KX	-	VRD1K4KPNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K4KX	-	VRD1K4KPTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D1K50X	-	VRD1K50PNX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D1K50X	-	VRD1K50PTX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2	-	R1160D321A	LVR-IC	LDO, 3.2V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
D2	-	R5220D321B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=3.2V	SON-6	dc3	DC8	7g	Ric
D2	-	RN2903AFS	Si-pnp-Digi	Dual, Sw, 50V, 80mA, 50mW, R1/R2=22k/22k	FS6	35	TD4	7b	Tos
D2008X	-	VRD2008NNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2008X	-	VRD2008NTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2009X	-	VRD2009NNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2009X	-	VRD2009NTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D200JX	-	VRD200JNNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D200JX	-	VRD200JNTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D200KX	-	VRD200KNNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D200KX	-	VRD200KNTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2010X	-	VRD2010NNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2010X	-	VRD2010NTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2011X	-	VRD2011NNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2011X	-	VRD2011NTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2012X	-	VRD2012NNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2012X	-	VRD2012NTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2013X	-	VRD2013NNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2013X	-	VRD2013NTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2014X	-	VRD2014NNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2014X	-	VRD2014NTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2015X	-	VRD2015NNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2015X	-	VRD2015NTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2016X	-	VRD2016NNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2016X	-	VRD2016NTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2017X	-	VRD2017NNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2017X	-	VRD2017NTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2018X	-	VRD2018NNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2018X	-	VRD2018NTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2019X	-	VRD2019NNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2019X	-	VRD2019NTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D201AX	-	VRD201ANNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D201AX	-	VRD201ANTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D201BX	-	VRD201BNNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D201BX	-	VRD201BNTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D201CX	-	VRD201CNNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D201CX	-	VRD201CNTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D201DX	-	VRD201DNNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D201DX	-	VRD201DNTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D201EX	-	VRD201ENNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D201EX	-	VRD201ENTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D201FX	-	VRD201FNNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D201FX	-	VRD201FNTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D201GX	-	VRD201GNNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D201GX	-	VRD201GNTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D201HX	-	VRD201HNNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D201HX	-	VRD201HNTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D201JX	-	VRD201JNNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D201JX	-	VRD201JNTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D201KX	-	VRD201KPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D201KX	-	VRD201KPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2020X	-	VRD2020PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2020X	-	VRD2020PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2021X	-	VRD2021PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2021X	-	VRD2021PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2022X	-	VRD2022PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2022X	-	VRD2022PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2023X	-	VRD2023PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2023X	-	VRD2023PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2024X	-	VRD2024PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2024X	-	VRD2024PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2025X	-	VRD2025PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2025X	-	VRD2025PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2026X	-	VRD2026PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2026X	-	VRD2026PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2027X	-	VRD2027PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2027X	-	VRD2027PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2028X	-	VRD2028PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2028X	-	VRD2028PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2029X	-	VRD2029PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2029X	-	VRD2029PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D202AX	-	VRD202APNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D202AX	-	VRD202APTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D202BX	-	VRD202BPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D202BX	-	VRD202BPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D202CX	-	VRD202CPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D202CX	-	VRD202CPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D202DX	-	VRD202DPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D202DX	-	VRD202DPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D202EX	-	VRD202EPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D202EX	-	VRD202EPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D202FX	-	VRD202FPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D202FX	-	VRD202FPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D202GX	-	VRD202GPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D202GX	-	VRD202GPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D202HX	-	VRD202HPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D202HX	-	VRD202HPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D202JX	-	VRD202JPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D202JX	-	VRD202JPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D202KX	-	VRD202KPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D202KX	-	VRD202KPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2030X	-	VRD2030PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2030X	-	VRD2030PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2031X	-	VRD2031PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2031X	-	VRD2031PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2032X	-	VRD2032PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2032X	-	VRD2032PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2033X	-	VRD2033PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2033X	-	VRD2033PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2034X	-	VRD2034PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2034X	-	VRD2034PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2035X	-	VRD2035PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2035X	-	VRD2035PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2036X	-	VRD2036PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2036X	-	VRD2036PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2037X	-	VRD2037PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2037X	-	VRD2037PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2038X	-	VRD2038PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2038X	-	VRD2038PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2039X	-	VRD2039PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2039X	-	VRD2039PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D203AX	-	VRD203APNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D203AX	-	VRD203APTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D203BX	-	VRD203BPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D203BX	-	VRD203BPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D203CX	-	VRD203CPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D203CX	-	VRD203CPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D203DX	-	VRD203DPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D203DX	-	VRD203DPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D203EX	-	VRD203EPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D203EX	-	VRD203EPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D203FX	-	VRD203FPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D203FX	-	VRD203FPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D203GX	-	VRD203GPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D203GX	-	VRD203GPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D203HX	-	VRD203HPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D203HX	-	VRD203HPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D203JX	-	VRD203JPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D203JX	-	VRD203JPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D203KX	-	VRD203KPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D203KX	-	VRD203KPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2040X	-	VRD2040PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2040X	-	VRD2040PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2041X	-	VRD2041PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2041X	-	VRD2041PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2042X	-	VRD2042PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2042X	-	VRD2042PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2043X	-	VRD2043PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2043X	-	VRD2043PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2044X	-	VRD2044PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2044X	-	VRD2044PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2045X	-	VRD2045PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2045X	-	VRD2045PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2046X	-	VRD2046PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2046X	-	VRD2046PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2047X	-	VRD2047PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2047X	-	VRD2047PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2048X	-	VRD2048PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2048X	-	VRD2048PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2049X	-	VRD2049PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2049X	-	VRD2049PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D204AX	-	VRD204APNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D204AX	-	VRD204APTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D204BX	-	VRD204BPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D204BX	-	VRD204BPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D204CX	-	VRD204CPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D204CX	-	VRD204CPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D204DX	-	VRD204DPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D204DX	-	VRD204DPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D204EX	-	VRD204EPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D204EX	-	VRD204EPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D204FX	-	VRD204FPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D204FX	-	VRD204FPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D204GX	-	VRD204GPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D204GX	-	VRD204GPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D204HX	-	VRD204HPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D204HX	-	VRD204HPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D204JX	-	VRD204JPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D204JX	-	VRD204JPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D204KX	-	VRD204KPNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D204KX	-	VRD204KPTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2050X	-	VRD2050PNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2050X	-	VRD2050PTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D20A	-	R1171S201A	LVR-IC	LDO, 2.0V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D20B	-	R1171S201B	LVR-IC	LDO, 2.0V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D2108X	-	VRD2108NNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2108X	-	VRD2108NTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2109X	-	VRD2109NNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2109X	-	VRD2109NTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D210JX	-	VRD210JNNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D210JX	-	VRD210JNTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D210KX	-	VRD210KNNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D210KX	-	VRD210KNTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2110X	-	VRD2110NNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2110X	-	VRD2110NTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2111X	-	VRD2111NNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2111X	-	VRD2111NTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2112X	-	VRD2112NNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2112X	-	VRD2112NTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2113X	-	VRD2113NNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2113X	-	VRD2113NTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2114X	-	VRD2114NNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2114X	-	VRD2114NTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2115X	-	VRD2115NNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2115X	-	VRD2115NTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2116X	-	VRD2116NNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2116X	-	VRD2116NTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2117X	-	VRD2117NNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2117X	-	VRD2117NTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2118X	-	VRD2118NNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2118X	-	VRD2118NTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2119X	-	VRD2119NNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2119X	-	VRD2119NTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D211AX	-	VRD211ANNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D211AX	-	VRD211ANTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D211BX	-	VRD211BNNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D211BX	-	VRD211BNTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D211CX	-	VRD211CNNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D211CX	-	VRD211CNTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D211DX	-	VRD211DNNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D211DX	-	VRD211DNTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D211EX	-	VRD211ENNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D211EX	-	VRD211ENTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D211FX	-	VRD211FNNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D211FX	-	VRD211FNTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D211GX	-	VRD211GNNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D211GX	-	VRD211GNTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D211HX	-	VRD211HNNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D211HX	-	VRD211HNTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D211JX	-	VRD211JNNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D211JX	-	VRD211JNTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D211KX	-	VRD211KPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D211KX	-	VRD211KPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2120X	-	VRD2120PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2120X	-	VRD2120PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2121X	-	VRD2121PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2121X	-	VRD2121PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2122X	-	VRD2122PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2122X	-	VRD2122PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2123X	-	VRD2123PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2123X	-	VRD2123PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2124X	-	VRD2124PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2124X	-	VRD2124PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2125X	-	VRD2125PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2125X	-	VRD2125PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2126X	-	VRD2126PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2126X	-	VRD2126PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2127X	-	VRD2127PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2127X	-	VRD2127PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2128X	-	VRD2128PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2128X	-	VRD2128PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2129X	-	VRD2129PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2129X	-	VRD2129PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D212AX	-	VRD212APNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D212AX	-	VRD212APTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D212BX	-	VRD212BPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D212BX	-	VRD212BPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D212CX	-	VRD212CPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D212CX	-	VRD212CPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D212DX	-	VRD212DPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D212DX	-	VRD212DPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D212EX	-	VRD212EPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D212EX	-	VRD212EPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D212FX	-	VRD212FPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D212FX	-	VRD212FPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D212GX	-	VRD212GPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D212GX	-	VRD212GPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D212HX	-	VRD212HPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D212HX	-	VRD212HPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D212JX	-	VRD212JPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D212JX	-	VRD212JPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D212KX	-	VRD212KPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D212KX	-	VRD212KPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2130X	-	VRD2130PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2130X	-	VRD2130PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2131X	-	VRD2131PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2131X	-	VRD2131PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2132X	-	VRD2132PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2132X	-	VRD2132PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2133X	-	VRD2133PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2133X	-	VRD2133PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2134X	-	VRD2134PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2134X	-	VRD2134PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2135X	-	VRD2135PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2135X	-	VRD2135PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2136X	-	VRD2136PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2136X	-	VRD2136PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2137X	-	VRD2137PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2137X	-	VRD2137PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2138X	-	VRD2138PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2138X	-	VRD2138PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2139X	-	VRD2139PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2139X	-	VRD2139PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D213AX	-	VRD213APNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D213AX	-	VRD213APTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D213BX	-	VRD213BPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D213BX	-	VRD213BPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D213CX	-	VRD213CPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D213CX	-	VRD213CPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D213DX	-	VRD213DPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D213DX	-	VRD213DPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D213EX	-	VRD213EPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D213EX	-	VRD213EPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D213FX	-	VRD213FPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D213FX	-	VRD213FPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D213GX	-	VRD213GPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D213GX	-	VRD213GPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D213HX	-	VRD213HPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D213HX	-	VRD213HPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D213JX	-	VRD213JPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D213JX	-	VRD213JPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D213KX	-	VRD213KPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D213KX	-	VRD213KPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2140X	-	VRD2140PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2140X	-	VRD2140PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2141X	-	VRD2141PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2141X	-	VRD2141PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2142X	-	VRD2142PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2142X	-	VRD2142PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2143X	-	VRD2143PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2143X	-	VRD2143PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2144X	-	VRD2144PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2144X	-	VRD2144PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2145X	-	VRD2145PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2145X	-	VRD2145PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2146X	-	VRD2146PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2146X	-	VRD2146PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2147X	-	VRD2147PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2147X	-	VRD2147PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2148X	-	VRD2148PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2148X	-	VRD2148PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2149X	-	VRD2149PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2149X	-	VRD2149PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D214AX	-	VRD214APNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D214AX	-	VRD214APTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D214BX	-	VRD214BPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D214BX	-	VRD214BPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D214CX	-	VRD214CPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D214CX	-	VRD214CPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D214DX	-	VRD214DPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D214DX	-	VRD214DPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D214EX	-	VRD214EPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D214EX	-	VRD214EPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D214FX	-	VRD214FPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D214FX	-	VRD214FPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D214GX	-	VRD214GPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D214GX	-	VRD214GPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D214HX	-	VRD214HPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D214HX	-	VRD214HPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D214JX	-	VRD214JPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D214JX	-	VRD214JPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D214KX	-	VRD214KPNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D214KX	-	VRD214KPTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2150X	-	VRD2150PNX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2150X	-	VRD2150PTX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D21A	-	R1171S211A	LVR-IC	LDO, 2.1V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D21B	-	R1171S211B	LVR-IC	LDO, 2.1V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D2208X	-	VRD2208NNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2208X	-	VRD2208NTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2209X	-	VRD2209NNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2209X	-	VRD2209NTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D220JX	-	VRD220JNNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D220JX	-	VRD220JNTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D220KX	-	VRD220KNNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D220KX	-	VRD220KNTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2210X	-	VRD2210NNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2210X	-	VRD2210NTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2211X	-	VRD2211NNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2211X	-	VRD2211NTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2212X	-	VRD2212NNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2212X	-	VRD2212NTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2213X	-	VRD2213NNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2213X	-	VRD2213NTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2214X	-	VRD2214NNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2214X	-	VRD2214NTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2215X	-	VRD2215NNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2215X	-	VRD2215NTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2216X	-	VRD2216NNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2216X	-	VRD2216NTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2217X	-	VRD2217NNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2217X	-	VRD2217NTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2218X	-	VRD2218NNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2218X	-	VRD2218NTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2219X	-	VRD2219NNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2219X	-	VRD2219NTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D221AX	-	VRD221ANNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D221AX	-	VRD221ANTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D221BX	-	VRD221BNNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D221BX	-	VRD221BNTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D221CX	-	VRD221CNNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D221CX	-	VRD221CNTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D221DX	-	VRD221DNNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D221DX	-	VRD221DNTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D221EX	-	VRD221ENNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D221EX	-	VRD221ENTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D221FX	-	VRD221FNNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D221FX	-	VRD221FNTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D221GX	-	VRD221GNNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D221GX	-	VRD221GNTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D221HX	-	VRD221HNNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D221HX	-	VRD221HNTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D221JX	-	VRD221JNNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D221JX	-	VRD221JNTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D221KX	-	VRD221KPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D221KX	-	VRD221KPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2220X	-	VRD2220PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2220X	-	VRD2220PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2221X	-	VRD2221PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2221X	-	VRD2221PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2222X	-	VRD2222PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2222X	-	VRD2222PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2223X	-	VRD2223PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2223X	-	VRD2223PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2224X	-	VRD2224PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2224X	-	VRD2224PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2225X	-	VRD2225PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2225X	-	VRD2225PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2226X	-	VRD2226PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2226X	-	VRD2226PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2227X	-	VRD2227PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2227X	-	VRD2227PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2228X	-	VRD2228PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2228X	-	VRD2228PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2229X	-	VRD2229PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2229X	-	VRD2229PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D222AX	-	VRD222APNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D222AX	-	VRD222APTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D222BX	-	VRD222BPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D222BX	-	VRD222BPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D222CX	-	VRD222CPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D222CX	-	VRD222CPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D222DX	-	VRD222DPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D222DX	-	VRD222DPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D222EX	-	VRD222EPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D222EX	-	VRD222EPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D222FX	-	VRD222FPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D222FX	-	VRD222FPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D222GX	-	VRD222GPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D222GX	-	VRD222GPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D222HX	-	VRD222HPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D222HX	-	VRD222HPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D222JX	-	VRD222JPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D222JX	-	VRD222JPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D222KX	-	VRD222KPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D222KX	-	VRD222KPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2230X	-	VRD2230PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2230X	-	VRD2230PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2231X	-	VRD2231PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2231X	-	VRD2231PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2232X	-	VRD2232PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2232X	-	VRD2232PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2233X	-	VRD2233PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2233X	-	VRD2233PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2234X	-	VRD2234PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2234X	-	VRD2234PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2235X	-	VRD2235PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2235X	-	VRD2235PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2236X	-	VRD2236PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2236X	-	VRD2236PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2237X	-	VRD2237PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2237X	-	VRD2237PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2238X	-	VRD2238PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2238X	-	VRD2238PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2239X	-	VRD2239PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2239X	-	VRD2239PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D223AX	-	VRD223APNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D223AX	-	VRD223APTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D223BX	-	VRD223BPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D223BX	-	VRD223BPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D223CX	-	VRD223CPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D223CX	-	VRD223CPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D223DX	-	VRD223DPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D223DX	-	VRD223DPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D223EX	-	VRD223EPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D223EX	-	VRD223EPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D223FX	-	VRD223FPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D223FX	-	VRD223FPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D223GX	-	VRD223GPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D223GX	-	VRD223GPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D223HX	-	VRD223HPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D223HX	-	VRD223HPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D223JX	-	VRD223JPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D223JX	-	VRD223JPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D223KX	-	VRD223KPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D223KX	-	VRD223KPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2240X	-	VRD2240PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2240X	-	VRD2240PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2241X	-	VRD2241PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2241X	-	VRD2241PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2242X	-	VRD2242PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2242X	-	VRD2242PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2243X	-	VRD2243PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2243X	-	VRD2243PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2244X	-	VRD2244PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2244X	-	VRD2244PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2245X	-	VRD2245PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2245X	-	VRD2245PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2246X	-	VRD2246PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2246X	-	VRD2246PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2247X	-	VRD2247PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2247X	-	VRD2247PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2248X	-	VRD2248PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2248X	-	VRD2248PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2249X	-	VRD2249PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2249X	-	VRD2249PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D224AX	-	VRD224APNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D224AX	-	VRD224APTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D224BX	-	VRD224BPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D224BX	-	VRD224BPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D224CX	-	VRD224CPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D224CX	-	VRD224CPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D224DX	-	VRD224DPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D224DX	-	VRD224DPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D224EX	-	VRD224EPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D224EX	-	VRD224EPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D224FX	-	VRD224FPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D224FX	-	VRD224FPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D224GX	-	VRD224GPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D224GX	-	VRD224GPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D224HX	-	VRD224HPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D224HX	-	VRD224HPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D224JX	-	VRD224JPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D224JX	-	VRD224JPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D224KX	-	VRD224KPNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D224KX	-	VRD224KPTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2250X	-	VRD2250PNX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2250X	-	VRD2250PTX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D22A	-	R1171S221A	LVR-IC	LDO, 2.2V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D22B	-	R1171S221B	LVR-IC	LDO, 2.2V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D2308X	-	VRD2308NNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2308X	-	VRD2308NTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2309X	-	VRD2309NNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2309X	-	VRD2309NTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D230JX	-	VRD230JNNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D230JX	-	VRD230JNTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D230KX	-	VRD230KNNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D230KX	-	VRD230KNTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2310X	-	VRD2310NNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2310X	-	VRD2310NTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2311X	-	VRD2311NNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2311X	-	VRD2311NTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2312X	-	VRD2312NNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2312X	-	VRD2312NTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2313X	-	VRD2313NNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2313X	-	VRD2313NTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2314X	-	VRD2314NNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2314X	-	VRD2314NTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2315X	-	VRD2315NNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2315X	-	VRD2315NTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2316X	-	VRD2316NNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2316X	-	VRD2316NTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2317X	-	VRD2317NNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2317X	-	VRD2317NTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2318X	-	VRD2318NNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2318X	-	VRD2318NTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2319X	-	VRD2319NNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2319X	-	VRD2319NTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D231AX	-	VRD231ANNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D231AX	-	VRD231ANTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D231BX	-	VRD231BNNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D231BX	-	VRD231BNTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D231CX	-	VRD231CNNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D231CX	-	VRD231CNTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D231DX	-	VRD231DNNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D231DX	-	VRD231DNTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D231EX	-	VRD231ENNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D231EX	-	VRD231ENTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D231FX	-	VRD231FNNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D231FX	-	VRD231FNTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D231GX	-	VRD231GNNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D231GX	-	VRD231GNTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D231HX	-	VRD231HNNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D231HX	-	VRD231HNTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D231JX	-	VRD231JNNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D231JX	-	VRD231JNTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D231KX	-	VRD231KPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D231KX	-	VRD231KPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2320X	-	VRD2320PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2320X	-	VRD2320PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2321X	-	VRD2321PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2321X	-	VRD2321PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2322X	-	VRD2322PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2322X	-	VRD2322PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2323X	-	VRD2323PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2323X	-	VRD2323PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2324X	-	VRD2324PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2324X	-	VRD2324PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2325X	-	VRD2325PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2325X	-	VRD2325PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2326X	-	VRD2326PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2326X	-	VRD2326PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2327X	-	VRD2327PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2327X	-	VRD2327PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2328X	-	VRD2328PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2328X	-	VRD2328PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2329X	-	VRD2329PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2329X	-	VRD2329PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D232AX	-	VRD232APNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D232AX	-	VRD232APTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D232BX	-	VRD232BPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D232BX	-	VRD232BPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D232CX	-	VRD232CPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D232CX	-	VRD232CPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D232DX	-	VRD232DPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D232DX	-	VRD232DPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D232EX	-	VRD232EPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D232EX	-	VRD232EPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D232FX	-	VRD232FPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D232FX	-	VRD232FPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D232GX	-	VRD232GPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D232GX	-	VRD232GPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D232HX	-	VRD232HPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D232HX	-	VRD232HPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D232JX	-	VRD232JPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D232JX	-	VRD232JPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D232KX	-	VRD232KPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D232KX	-	VRD232KPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2330X	-	VRD2330PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2330X	-	VRD2330PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2331X	-	VRD2331PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2331X	-	VRD2331PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2332X	-	VRD2332PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2332X	-	VRD2332PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2333X	-	VRD2333PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2333X	-	VRD2333PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2334X	-	VRD2334PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2334X	-	VRD2334PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2335X	-	VRD2335PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2335X	-	VRD2335PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2336X	-	VRD2336PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2336X	-	VRD2336PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2337X	-	VRD2337PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2337X	-	VRD2337PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2338X	-	VRD2338PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2338X	-	VRD2338PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2339X	-	VRD2339PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2339X	-	VRD2339PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D233AX	-	VRD233APNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D233AX	-	VRD233APTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D233BX	-	VRD233BPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D233BX	-	VRD233BPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D233CX	-	VRD233CPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D233CX	-	VRD233CPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D233DX	-	VRD233DPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D233DX	-	VRD233DPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D233EX	-	VRD233EPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D233EX	-	VRD233EPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D233FX	-	VRD233FPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D233FX	-	VRD233FPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D233GX	-	VRD233GPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D233GX	-	VRD233GPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D233HX	-	VRD233HPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D233HX	-	VRD233HPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D233JX	-	VRD233JPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D233JX	-	VRD233JPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D233KX	-	VRD233KPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D233KX	-	VRD233KPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2340X	-	VRD2340PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2340X	-	VRD2340PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2341X	-	VRD2341PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2341X	-	VRD2341PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2342X	-	VRD2342PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2342X	-	VRD2342PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2343X	-	VRD2343PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2343X	-	VRD2343PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2344X	-	VRD2344PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2344X	-	VRD2344PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2345X	-	VRD2345PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2345X	-	VRD2345PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2346X	-	VRD2346PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2346X	-	VRD2346PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2347X	-	VRD2347PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2347X	-	VRD2347PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2348X	-	VRD2348PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2348X	-	VRD2348PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2349X	-	VRD2349PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2349X	-	VRD2349PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D234AX	-	VRD234APNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D234AX	-	VRD234APTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D234BX	-	VRD234BPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D234BX	-	VRD234BPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D234CX	-	VRD234CPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D234CX	-	VRD234CPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D234DX	-	VRD234DPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D234DX	-	VRD234DPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D234EX	-	VRD234EPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D234EX	-	VRD234EPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D234FX	-	VRD234FPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D234FX	-	VRD234FPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D234GX	-	VRD234GPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D234GX	-	VRD234GPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D234HX	-	VRD234HPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D234HX	-	VRD234HPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D234JX	-	VRD234JPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D234JX	-	VRD234JPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D234KX	-	VRD234KPNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D234KX	-	VRD234KPTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2350X	-	VRD2350PNX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2350X	-	VRD2350PTX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D23A	-	R1171S231A	LVR-IC	LDO, 2.3V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D23B	-	R1171S231B	LVR-IC	LDO, 2.3V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D2408X	-	VRD2408NNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2408X	-	VRD2408NTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2409X	-	VRD2409NNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2409X	-	VRD2409NTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D240JX	-	VRD240JNNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D240JX	-	VRD240JNTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D240KX	-	VRD240KNNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D240KX	-	VRD240KNTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2410X	-	VRD2410NNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2410X	-	VRD2410NTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2411X	-	VRD2411NNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2411X	-	VRD2411NTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2412X	-	VRD2412NNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2412X	-	VRD2412NTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2413X	-	VRD2413NNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2413X	-	VRD2413NTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2414X	-	VRD2414NNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2414X	-	VRD2414NTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2415X	-	VRD2415NNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2415X	-	VRD2415NTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2416X	-	VRD2416NNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2416X	-	VRD2416NTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2417X	-	VRD2417NNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2417X	-	VRD2417NTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2418X	-	VRD2418NNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2418X	-	VRD2418NTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2419X	-	VRD2419NNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2419X	-	VRD2419NTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D241AX	-	VRD241ANNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D241AX	-	VRD241ANTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D241BX	-	VRD241BNNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D241BX	-	VRD241BNTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D241CX	-	VRD241CNNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D241CX	-	VRD241CNTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D241DX	-	VRD241DNNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D241DX	-	VRD241DNTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D241EX	-	VRD241ENNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D241EX	-	VRD241ENTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D241FX	-	VRD241FNNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D241FX	-	VRD241FNTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D241GX	-	VRD241GNNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D241GX	-	VRD241GNTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D241HX	-	VRD241HNNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D241HX	-	VRD241HNTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D241JX	-	VRD241JNNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D241JX	-	VRD241JNTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D241KX	-	VRD241KPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D241KX	-	VRD241KPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2420X	-	VRD2420PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2420X	-	VRD2420PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2421X	-	VRD2421PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2421X	-	VRD2421PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2422X	-	VRD2422PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2422X	-	VRD2422PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2423X	-	VRD2423PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2423X	-	VRD2423PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2424X	-	VRD2424PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2424X	-	VRD2424PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2425X	-	VRD2425PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2425X	-	VRD2425PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2426X	-	VRD2426PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2426X	-	VRD2426PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2427X	-	VRD2427PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2427X	-	VRD2427PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2428X	-	VRD2428PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2428X	-	VRD2428PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2429X	-	VRD2429PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2429X	-	VRD2429PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D242AX	-	VRD242APNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D242AX	-	VRD242APTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D242BX	-	VRD242BPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D242BX	-	VRD242BPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D242CX	-	VRD242CPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D242CX	-	VRD242CPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D242DX	-	VRD242DPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D242DX	-	VRD242DPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D242EX	-	VRD242EPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D242EX	-	VRD242EPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D242FX	-	VRD242FPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D242FX	-	VRD242FPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D242GX	-	VRD242GPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D242GX	-	VRD242GPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D242HX	-	VRD242HPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D242HX	-	VRD242HPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D242JX	-	VRD242JPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D242JX	-	VRD242JPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D242KX	-	VRD242KPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D242KX	-	VRD242KPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2430X	-	VRD2430PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2430X	-	VRD2430PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2431X	-	VRD2431PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2431X	-	VRD2431PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2432X	-	VRD2432PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2432X	-	VRD2432PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2433X	-	VRD2433PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2433X	-	VRD2433PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2434X	-	VRD2434PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2434X	-	VRD2434PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2435X	-	VRD2435PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2435X	-	VRD2435PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2436X	-	VRD2436PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2436X	-	VRD2436PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2437X	-	VRD2437PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2437X	-	VRD2437PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2438X	-	VRD2438PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2438X	-	VRD2438PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2439X	-	VRD2439PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2439X	-	VRD2439PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D243AX	-	VRD243APNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D243AX	-	VRD243APTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D243BX	-	VRD243BPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D243BX	-	VRD243BPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D243CX	-	VRD243CPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D243CX	-	VRD243CPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D243DX	-	VRD243DPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D243DX	-	VRD243DPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D243EX	-	VRD243EPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D243EX	-	VRD243EPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D243FX	-	VRD243FPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D243FX	-	VRD243FPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D243GX	-	VRD243GPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D243GX	-	VRD243GPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D243HX	-	VRD243HPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D243HX	-	VRD243HPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D243JX	-	VRD243JPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D243JX	-	VRD243JPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D243KX	-	VRD243KPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D243KX	-	VRD243KPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2440X	-	VRD2440PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2440X	-	VRD2440PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2441X	-	VRD2441PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2441X	-	VRD2441PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2442X	-	VRD2442PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2442X	-	VRD2442PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2443X	-	VRD2443PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2443X	-	VRD2443PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2444X	-	VRD2444PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2444X	-	VRD2444PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2445X	-	VRD2445PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2445X	-	VRD2445PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2446X	-	VRD2446PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2446X	-	VRD2446PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2447X	-	VRD2447PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2447X	-	VRD2447PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2448X	-	VRD2448PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2448X	-	VRD2448PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2449X	-	VRD2449PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2449X	-	VRD2449PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D244AX	-	VRD244APNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D244AX	-	VRD244APTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D244BX	-	VRD244BPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D244BX	-	VRD244BPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D244CX	-	VRD244CPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D244CX	-	VRD244CPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D244DX	-	VRD244DPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D244DX	-	VRD244DPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D244EX	-	VRD244EPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D244EX	-	VRD244EPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D244FX	-	VRD244FPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D244FX	-	VRD244FPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D244GX	-	VRD244GPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D244GX	-	VRD244GPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D244HX	-	VRD244HPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D244HX	-	VRD244HPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D244JX	-	VRD244JPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D244JX	-	VRD244JPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D244KX	-	VRD244KPNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D244KX	-	VRD244KPTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2450X	-	VRD2450PNX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2450X	-	VRD2450PTX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D24A	-	R1171S241A	LVR-IC	LDO, 2.4V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D24B	-	R1171S241B	LVR-IC	LDO, 2.4V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D2508X	-	VRD2508NNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2508X	-	VRD2508NTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2509X	-	VRD2509NNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2509X	-	VRD2509NTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D250JX	-	VRD250JNNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D250JX	-	VRD250JNTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D250KX	-	VRD250KNNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D250KX	-	VRD250KNTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2510X	-	VRD2510NNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2510X	-	VRD2510NTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2511X	-	VRD2511NNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2511X	-	VRD2511NTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2512X	-	VRD2512NNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2512X	-	VRD2512NTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2513X	-	VRD2513NNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2513X	-	VRD2513NTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2514X	-	VRD2514NNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2514X	-	VRD2514NTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2515X	-	VRD2515NNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2515X	-	VRD2515NTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2516X	-	VRD2516NNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2516X	-	VRD2516NTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2517X	-	VRD2517NNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2517X	-	VRD2517NTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2518X	-	VRD2518NNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2518X	-	VRD2518NTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2519X	-	VRD2519NNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2519X	-	VRD2519NTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D251AX	-	VRD251ANNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D251AX	-	VRD251ANTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D251BX	-	VRD251BNNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D251BX	-	VRD251BNTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D251CX	-	VRD251CNNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D251CX	-	VRD251CNTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D251DX	-	VRD251DNNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D251DX	-	VRD251DNTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D251EX	-	VRD251ENNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D251EX	-	VRD251ENTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D251FX	-	VRD251FNNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D251FX	-	VRD251FNTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D251GX	-	VRD251GNNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D251GX	-	VRD251GNTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D251HX	-	VRD251HNNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D251HX	-	VRD251HNTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D251JX	-	VRD251JNNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D251JX	-	VRD251JNTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D251KX	-	VRD251KPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D251KX	-	VRD251KPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2520X	-	VRD2520PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2520X	-	VRD2520PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2521X	-	VRD2521PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2521X	-	VRD2521PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2522X	-	VRD2522PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2522X	-	VRD2522PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2523X	-	VRD2523PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2523X	-	VRD2523PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2524X	-	VRD2524PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2524X	-	VRD2524PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2525X	-	VRD2525PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2525X	-	VRD2525PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2526X	-	VRD2526PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2526X	-	VRD2526PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2527X	-	VRD2527PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2527X	-	VRD2527PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2528X	-	VRD2528PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2528X	-	VRD2528PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2529X	-	VRD2529PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2529X	-	VRD2529PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D252AX	-	VRD252APNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D252AX	-	VRD252APTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D252BX	-	VRD252BPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D252BX	-	VRD252BPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D252CX	-	VRD252CPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D252CX	-	VRD252CPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D252DX	-	VRD252DPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D252DX	-	VRD252DPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D252EX	-	VRD252EPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D252EX	-	VRD252EPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D252FX	-	VRD252FPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D252FX	-	VRD252FPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D252GX	-	VRD252GPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D252GX	-	VRD252GPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D252HX	-	VRD252HPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D252HX	-	VRD252HPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D252JX	-	VRD252JPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D252JX	-	VRD252JPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D252KX	-	VRD252KPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D252KX	-	VRD252KPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2530X	-	VRD2530PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2530X	-	VRD2530PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2531X	-	VRD2531PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2531X	-	VRD2531PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2532X	-	VRD2532PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2532X	-	VRD2532PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2533X	-	VRD2533PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2533X	-	VRD2533PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2534X	-	VRD2534PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2534X	-	VRD2534PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2535X	-	VRD2535PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2535X	-	VRD2535PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2536X	-	VRD2536PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2536X	-	VRD2536PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2537X	-	VRD2537PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2537X	-	VRD2537PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2538X	-	VRD2538PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2538X	-	VRD2538PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2539X	-	VRD2539PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2539X	-	VRD2539PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D253AX	-	VRD253APNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D253AX	-	VRD253APTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D253BX	-	VRD253BPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D253BX	-	VRD253BPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D253CX	-	VRD253CPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D253CX	-	VRD253CPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D253DX	-	VRD253DPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D253DX	-	VRD253DPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D253EX	-	VRD253EPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D253EX	-	VRD253EPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D253FX	-	VRD253FPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D253FX	-	VRD253FPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D253GX	-	VRD253GPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D253GX	-	VRD253GPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D253HX	-	VRD253HPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D253HX	-	VRD253HPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D253JX	-	VRD253JPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D253JX	-	VRD253JPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D253KX	-	VRD253KPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D253KX	-	VRD253KPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2540X	-	VRD2540PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2540X	-	VRD2540PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2541X	-	VRD2541PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2541X	-	VRD2541PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2542X	-	VRD2542PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2542X	-	VRD2542PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2543X	-	VRD2543PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2543X	-	VRD2543PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2544X	-	VRD2544PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2544X	-	VRD2544PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2545X	-	VRD2545PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2545X	-	VRD2545PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2546X	-	VRD2546PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2546X	-	VRD2546PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2547X	-	VRD2547PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2547X	-	VRD2547PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2548X	-	VRD2548PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2548X	-	VRD2548PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2549X	-	VRD2549PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2549X	-	VRD2549PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D254AX	-	VRD254APNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D254AX	-	VRD254APTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D254BX	-	VRD254BPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D254BX	-	VRD254BPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D254CX	-	VRD254CPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D254CX	-	VRD254CPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D254DX	-	VRD254DPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D254DX	-	VRD254DPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D254EX	-	VRD254EPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D254EX	-	VRD254EPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D254FX	-	VRD254FPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D254FX	-	VRD254FPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D254GX	-	VRD254GPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D254GX	-	VRD254GPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D254HX	-	VRD254HPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D254HX	-	VRD254HPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D254JX	-	VRD254JPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D254JX	-	VRD254JPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D254KX	-	VRD254KPNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D254KX	-	VRD254KPTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2550X	-	VRD2550PNX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2550X	-	VRD2550PTX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D25A	-	R1171S251A	LVR-IC	LDO, 2.5V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D25B	-	R1171S251B	LVR-IC	LDO, 2.5V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D2608X	-	VRD2608NNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2608X	-	VRD2608NTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2609X	-	VRD2609NNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2609X	-	VRD2609NTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D260JX	-	VRD260JNNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D260JX	-	VRD260JNTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D260KX	-	VRD260KNNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D260KX	-	VRD260KNTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2610X	-	VRD2610NNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2610X	-	VRD2610NTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2611X	-	VRD2611NNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2611X	-	VRD2611NTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2612X	-	VRD2612NNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2612X	-	VRD2612NTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2613X	-	VRD2613NNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2613X	-	VRD2613NTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2614X	-	VRD2614NNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2614X	-	VRD2614NTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2615X	-	VRD2615NNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2615X	-	VRD2615NTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2616X	-	VRD2616NNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2616X	-	VRD2616NTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2617X	-	VRD2617NNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2617X	-	VRD2617NTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2618X	-	VRD2618NNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2618X	-	VRD2618NTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2619X	-	VRD2619NNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2619X	-	VRD2619NTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D261AX	-	VRD261ANNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D261AX	-	VRD261ANTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D261BX	-	VRD261BNNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D261BX	-	VRD261BNTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D261CX	-	VRD261CNNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D261CX	-	VRD261CNTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D261DX	-	VRD261DNNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D261DX	-	VRD261DNTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D261EX	-	VRD261ENNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D261EX	-	VRD261ENTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D261FX	-	VRD261FNNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D261FX	-	VRD261FNTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D261GX	-	VRD261GNNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D261GX	-	VRD261GNTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D261HX	-	VRD261HNNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D261HX	-	VRD261HNTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D261JX	-	VRD261JNNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D261JX	-	VRD261JNTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D261KX	-	VRD261KPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D261KX	-	VRD261KPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2620X	-	VRD2620PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2620X	-	VRD2620PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2621X	-	VRD2621PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2621X	-	VRD2621PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2622X	-	VRD2622PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2622X	-	VRD2622PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2623X	-	VRD2623PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2623X	-	VRD2623PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2624X	-	VRD2624PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2624X	-	VRD2624PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2625X	-	VRD2625PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2625X	-	VRD2625PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2626X	-	VRD2626PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2626X	-	VRD2626PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2627X	-	VRD2627PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2627X	-	VRD2627PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2628X	-	VRD2628PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2628X	-	VRD2628PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2629X	-	VRD2629PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2629X	-	VRD2629PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D262AX	-	VRD262APNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D262AX	-	VRD262APTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D262BX	-	VRD262BPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D262BX	-	VRD262BPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D262CX	-	VRD262CPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D262CX	-	VRD262CPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D262DX	-	VRD262DPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D262DX	-	VRD262DPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D262EX	-	VRD262EPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D262EX	-	VRD262EPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D262FX	-	VRD262FPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D262FX	-	VRD262FPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D262GX	-	VRD262GPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D262GX	-	VRD262GPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D262HX	-	VRD262HPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D262HX	-	VRD262HPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D262JX	-	VRD262JPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D262JX	-	VRD262JPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D262KX	-	VRD262KPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D262KX	-	VRD262KPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2630X	-	VRD2630PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2630X	-	VRD2630PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2631X	-	VRD2631PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2631X	-	VRD2631PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2632X	-	VRD2632PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2632X	-	VRD2632PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2633X	-	VRD2633PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2633X	-	VRD2633PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2634X	-	VRD2634PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2634X	-	VRD2634PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2635X	-	VRD2635PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2635X	-	VRD2635PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2636X	-	VRD2636PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2636X	-	VRD2636PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2637X	-	VRD2637PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2637X	-	VRD2637PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2638X	-	VRD2638PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2638X	-	VRD2638PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2639X	-	VRD2639PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2639X	-	VRD2639PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D263AX	-	VRD263APNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D263AX	-	VRD263APTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D263BX	-	VRD263BPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D263BX	-	VRD263BPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D263CX	-	VRD263CPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D263CX	-	VRD263CPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D263DX	-	VRD263DPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D263DX	-	VRD263DPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D263EX	-	VRD263EPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D263EX	-	VRD263EPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D263FX	-	VRD263FPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D263FX	-	VRD263FPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D263GX	-	VRD263GPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D263GX	-	VRD263GPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D263HX	-	VRD263HPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D263HX	-	VRD263HPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D263JX	-	VRD263JPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D263JX	-	VRD263JPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D263KX	-	VRD263KPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D263KX	-	VRD263KPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2640X	-	VRD2640PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2640X	-	VRD2640PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2641X	-	VRD2641PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2641X	-	VRD2641PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2642X	-	VRD2642PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2642X	-	VRD2642PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2643X	-	VRD2643PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2643X	-	VRD2643PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2644X	-	VRD2644PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2644X	-	VRD2644PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2645X	-	VRD2645PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2645X	-	VRD2645PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2646X	-	VRD2646PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2646X	-	VRD2646PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2647X	-	VRD2647PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2647X	-	VRD2647PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2648X	-	VRD2648PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2648X	-	VRD2648PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2649X	-	VRD2649PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2649X	-	VRD2649PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D264AX	-	VRD264APNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D264AX	-	VRD264APTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D264BX	-	VRD264BPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D264BX	-	VRD264BPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D264CX	-	VRD264CPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D264CX	-	VRD264CPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D264DX	-	VRD264DPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D264DX	-	VRD264DPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D264EX	-	VRD264EPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D264EX	-	VRD264EPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D264FX	-	VRD264FPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D264FX	-	VRD264FPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D264GX	-	VRD264GPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D264GX	-	VRD264GPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D264HX	-	VRD264HPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D264HX	-	VRD264HPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D264JX	-	VRD264JPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D264JX	-	VRD264JPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D264KX	-	VRD264KPNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D264KX	-	VRD264KPTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2650X	-	VRD2650PNX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2650X	-	VRD2650PTX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D26A	-	R1171S261A	LVR-IC	LDO, 2.6V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D26B	-	R1171S261B	LVR-IC	LDO, 2.6V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D2708X	-	VRD2708NNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2708X	-	VRD2708NTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2709X	-	VRD2709NNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2709X	-	VRD2709NTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D270JX	-	VRD270JNNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D270JX	-	VRD270JNTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D270KX	-	VRD270KNNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D270KX	-	VRD270KNTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2710X	-	VRD2710NNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2710X	-	VRD2710NTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2711X	-	VRD2711NNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2711X	-	VRD2711NTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2712X	-	VRD2712NNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2712X	-	VRD2712NTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2713X	-	VRD2713NNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2713X	-	VRD2713NTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2714X	-	VRD2714NNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2714X	-	VRD2714NTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2715X	-	VRD2715NNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2715X	-	VRD2715NTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2716X	-	VRD2716NNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2716X	-	VRD2716NTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2717X	-	VRD2717NNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2717X	-	VRD2717NTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2718X	-	VRD2718NNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2718X	-	VRD2718NTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2719X	-	VRD2719NNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2719X	-	VRD2719NTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D271AX	-	VRD271ANNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D271AX	-	VRD271ANTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D271BX	-	VRD271BNNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D271BX	-	VRD271BNTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D271CX	-	VRD271CNNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D271CX	-	VRD271CNTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D271DX	-	VRD271DNNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D271DX	-	VRD271DNTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D271EX	-	VRD271ENNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D271EX	-	VRD271ENTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D271FX	-	VRD271FNNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D271FX	-	VRD271FNTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D271GX	-	VRD271GNNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D271GX	-	VRD271GNTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D271HX	-	VRD271HNNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D271HX	-	VRD271HNTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D271JX	-	VRD271JNNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D271JX	-	VRD271JNTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D271KX	-	VRD271KPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D271KX	-	VRD271KPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2720X	-	VRD2720PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2720X	-	VRD2720PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2721X	-	VRD2721PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2721X	-	VRD2721PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2722X	-	VRD2722PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2722X	-	VRD2722PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2723X	-	VRD2723PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2723X	-	VRD2723PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2724X	-	VRD2724PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2724X	-	VRD2724PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2725X	-	VRD2725PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2725X	-	VRD2725PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2726X	-	VRD2726PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2726X	-	VRD2726PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2727X	-	VRD2727PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2727X	-	VRD2727PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2728X	-	VRD2728PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2728X	-	VRD2728PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2729X	-	VRD2729PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2729X	-	VRD2729PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D272AX	-	VRD272APNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D272AX	-	VRD272APTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D272BX	-	VRD272BPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D272BX	-	VRD272BPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D272CX	-	VRD272CPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D272CX	-	VRD272CPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D272DX	-	VRD272DPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D272DX	-	VRD272DPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D272EX	-	VRD272EPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D272EX	-	VRD272EPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D272FX	-	VRD272FPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D272FX	-	VRD272FPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D272GX	-	VRD272GPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D272GX	-	VRD272GPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D272HX	-	VRD272HPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D272HX	-	VRD272HPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D272JX	-	VRD272JPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D272JX	-	VRD272JPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D272KX	-	VRD272KPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D272KX	-	VRD272KPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2730X	-	VRD2730PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2730X	-	VRD2730PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2731X	-	VRD2731PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2731X	-	VRD2731PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2732X	-	VRD2732PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2732X	-	VRD2732PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2733X	-	VRD2733PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2733X	-	VRD2733PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2734X	-	VRD2734PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2734X	-	VRD2734PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2735X	-	VRD2735PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2735X	-	VRD2735PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2736X	-	VRD2736PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2736X	-	VRD2736PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2737X	-	VRD2737PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2737X	-	VRD2737PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2738X	-	VRD2738PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2738X	-	VRD2738PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2739X	-	VRD2739PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2739X	-	VRD2739PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D273AX	-	VRD273APNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D273AX	-	VRD273APTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D273BX	-	VRD273BPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D273BX	-	VRD273BPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D273CX	-	VRD273CPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D273CX	-	VRD273CPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D273DX	-	VRD273DPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D273DX	-	VRD273DPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D273EX	-	VRD273EPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D273EX	-	VRD273EPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D273FX	-	VRD273FPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D273FX	-	VRD273FPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D273GX	-	VRD273GPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D273GX	-	VRD273GPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D273HX	-	VRD273HPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D273HX	-	VRD273HPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D273JX	-	VRD273JPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D273JX	-	VRD273JPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D273KX	-	VRD273KPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D273KX	-	VRD273KPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2740X	-	VRD2740PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2740X	-	VRD2740PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2741X	-	VRD2741PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2741X	-	VRD2741PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2742X	-	VRD2742PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2742X	-	VRD2742PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2743X	-	VRD2743PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2743X	-	VRD2743PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2744X	-	VRD2744PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2744X	-	VRD2744PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2745X	-	VRD2745PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2745X	-	VRD2745PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2746X	-	VRD2746PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2746X	-	VRD2746PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2747X	-	VRD2747PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2747X	-	VRD2747PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2748X	-	VRD2748PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2748X	-	VRD2748PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2749X	-	VRD2749PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2749X	-	VRD2749PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D274AX	-	VRD274APNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D274AX	-	VRD274APTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D274BX	-	VRD274BPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D274BX	-	VRD274BPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D274CX	-	VRD274CPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D274CX	-	VRD274CPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D274DX	-	VRD274DPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D274DX	-	VRD274DPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D274EX	-	VRD274EPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D274EX	-	VRD274EPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D274FX	-	VRD274FPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D274FX	-	VRD274FPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D274GX	-	VRD274GPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D274GX	-	VRD274GPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D274HX	-	VRD274HPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D274HX	-	VRD274HPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D274JX	-	VRD274JPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D274JX	-	VRD274JPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D274KX	-	VRD274KPNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D274KX	-	VRD274KPTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2750X	-	VRD2750PNX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2750X	-	VRD2750PTX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D27A	-	R1171S271A	LVR-IC	LDO, 2.7V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D27B	-	R1171S271B	LVR-IC	LDO, 2.7V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D2808X	-	VRD2808NNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2808X	-	VRD2808NTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2809X	-	VRD2809NNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2809X	-	VRD2809NTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D280JX	-	VRD280JNNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D280JX	-	VRD280JNTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D280KX	-	VRD280KNNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D280KX	-	VRD280KNTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2810X	-	VRD2810NNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2810X	-	VRD2810NTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2811X	-	VRD2811NNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2811X	-	VRD2811NTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2812X	-	VRD2812NNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2812X	-	VRD2812NTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2813X	-	VRD2813NNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2813X	-	VRD2813NTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2814X	-	VRD2814NNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2814X	-	VRD2814NTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2815X	-	VRD2815NNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2815X	-	VRD2815NTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2816X	-	VRD2816NNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2816X	-	VRD2816NTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2817X	-	VRD2817NNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2817X	-	VRD2817NTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2818X	-	VRD2818NNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2818X	-	VRD2818NTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2819X	-	VRD2819NNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2819X	-	VRD2819NTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D281AX	-	VRD281ANNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D281AX	-	VRD281ANTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D281BX	-	VRD281BNNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D281BX	-	VRD281BNTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D281CX	-	VRD281CNNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D281CX	-	VRD281CNTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D281DX	-	VRD281DNNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D281DX	-	VRD281DNTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D281EX	-	VRD281ENNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D281EX	-	VRD281ENTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D281FX	-	VRD281FNNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D281FX	-	VRD281FNTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D281GX	-	VRD281GNNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D281GX	-	VRD281GNTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D281HX	-	VRD281HNNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D281HX	-	VRD281HNTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D281JX	-	VRD281JNNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D281JX	-	VRD281JNTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D281KX	-	VRD281KPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D281KX	-	VRD281KPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2820X	-	VRD2820PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2820X	-	VRD2820PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2821X	-	VRD2821PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2821X	-	VRD2821PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2822X	-	VRD2822PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2822X	-	VRD2822PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2823X	-	VRD2823PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2823X	-	VRD2823PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2824X	-	VRD2824PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2824X	-	VRD2824PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2825X	-	VRD2825PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2825X	-	VRD2825PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2826X	-	VRD2826PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2826X	-	VRD2826PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2827X	-	VRD2827PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2827X	-	VRD2827PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2828X	-	VRD2828PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2828X	-	VRD2828PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2829X	-	VRD2829PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2829X	-	VRD2829PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D282AX	-	VRD282APNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D282AX	-	VRD282APTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D282BX	-	VRD282BPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D282BX	-	VRD282BPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D282CX	-	VRD282CPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D282CX	-	VRD282CPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D282DX	-	VRD282DPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D282DX	-	VRD282DPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D282EX	-	VRD282EPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D282EX	-	VRD282EPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D282FX	-	VRD282FPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D282FX	-	VRD282FPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D282GX	-	VRD282GPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D282GX	-	VRD282GPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D282HX	-	VRD282HPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D282HX	-	VRD282HPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D282JX	-	VRD282JPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D282JX	-	VRD282JPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D282KX	-	VRD282KPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D282KX	-	VRD282KPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2830X	-	VRD2830PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2830X	-	VRD2830PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2831X	-	VRD2831PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2831X	-	VRD2831PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2832X	-	VRD2832PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2832X	-	VRD2832PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2833X	-	VRD2833PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2833X	-	VRD2833PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2834X	-	VRD2834PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2834X	-	VRD2834PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2835X	-	VRD2835PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2835X	-	VRD2835PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2836X	-	VRD2836PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2836X	-	VRD2836PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2837X	-	VRD2837PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2837X	-	VRD2837PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2838X	-	VRD2838PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2838X	-	VRD2838PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2839X	-	VRD2839PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2839X	-	VRD2839PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D283AX	-	VRD283APNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D283AX	-	VRD283APTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D283BX	-	VRD283BPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D283BX	-	VRD283BPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D283CX	-	VRD283CPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D283CX	-	VRD283CPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D283DX	-	VRD283DPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D283DX	-	VRD283DPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D283EX	-	VRD283EPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D283EX	-	VRD283EPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D283FX	-	VRD283FPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D283FX	-	VRD283FPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D283GX	-	VRD283GPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D283GX	-	VRD283GPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D283HX	-	VRD283HPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D283HX	-	VRD283HPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D283JX	-	VRD283JPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D283JX	-	VRD283JPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D283KX	-	VRD283KPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D283KX	-	VRD283KPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2840X	-	VRD2840PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2840X	-	VRD2840PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2841X	-	VRD2841PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2841X	-	VRD2841PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2842X	-	VRD2842PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2842X	-	VRD2842PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2843X	-	VRD2843PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2843X	-	VRD2843PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2844X	-	VRD2844PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2844X	-	VRD2844PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2845X	-	VRD2845PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2845X	-	VRD2845PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2846X	-	VRD2846PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2846X	-	VRD2846PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2847X	-	VRD2847PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2847X	-	VRD2847PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2848X	-	VRD2848PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2848X	-	VRD2848PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2849X	-	VRD2849PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2849X	-	VRD2849PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D284AX	-	VRD284APNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D284AX	-	VRD284APTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D284BX	-	VRD284BPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D284BX	-	VRD284BPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D284CX	-	VRD284CPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D284CX	-	VRD284CPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D284DX	-	VRD284DPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D284DX	-	VRD284DPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D284EX	-	VRD284EPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D284EX	-	VRD284EPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D284FX	-	VRD284FPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D284FX	-	VRD284FPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D284GX	-	VRD284GPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D284GX	-	VRD284GPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D284HX	-	VRD284HPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D284HX	-	VRD284HPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D284JX	-	VRD284JPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D284JX	-	VRD284JPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D284KX	-	VRD284KPNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D284KX	-	VRD284KPTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2850X	-	VRD2850PNX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2850X	-	VRD2850PTX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D28A	-	R1171S281A	LVR-IC	LDO, 2.8V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D28B	-	R1171S281B	LVR-IC	LDO, 2.8V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D2908X	-	VRD2908NNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2908X	-	VRD2908NTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2909X	-	VRD2909NNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2909X	-	VRD2909NTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D290JX	-	VRD290JNNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D290JX	-	VRD290JNTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D290KX	-	VRD290KNNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D290KX	-	VRD290KNTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2910X	-	VRD2910NNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2910X	-	VRD2910NTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2911X	-	VRD2911NNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2911X	-	VRD2911NTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2912X	-	VRD2912NNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2912X	-	VRD2912NTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2913X	-	VRD2913NNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2913X	-	VRD2913NTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2914X	-	VRD2914NNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2914X	-	VRD2914NTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2915X	-	VRD2915NNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2915X	-	VRD2915NTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2916X	-	VRD2916NNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2916X	-	VRD2916NTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2917X	-	VRD2917NNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2917X	-	VRD2917NTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2918X	-	VRD2918NNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2918X	-	VRD2918NTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2919X	-	VRD2919NNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2919X	-	VRD2919NTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D291AX	-	VRD291ANNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D291AX	-	VRD291ANTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D291BX	-	VRD291BNNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D291BX	-	VRD291BNTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D291CX	-	VRD291CNNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D291CX	-	VRD291CNTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D291DX	-	VRD291DNNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D291DX	-	VRD291DNTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D291EX	-	VRD291ENNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D291EX	-	VRD291ENTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D291FX	-	VRD291FNNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D291FX	-	VRD291FNTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D291GX	-	VRD291GNNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D291GX	-	VRD291GNTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D291HX	-	VRD291HNNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D291HX	-	VRD291HNTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D291JX	-	VRD291JNNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D291JX	-	VRD291JNTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D291KX	-	VRD291KPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D291KX	-	VRD291KPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2920X	-	VRD2920PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2920X	-	VRD2920PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2921X	-	VRD2921PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2921X	-	VRD2921PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2922X	-	VRD2922PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2922X	-	VRD2922PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2923X	-	VRD2923PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2923X	-	VRD2923PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2924X	-	VRD2924PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2924X	-	VRD2924PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2925X	-	VRD2925PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2925X	-	VRD2925PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2926X	-	VRD2926PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2926X	-	VRD2926PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2927X	-	VRD2927PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2927X	-	VRD2927PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2928X	-	VRD2928PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2928X	-	VRD2928PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2929X	-	VRD2929PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2929X	-	VRD2929PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D292AX	-	VRD292APNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D292AX	-	VRD292APTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D292BX	-	VRD292BPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D292BX	-	VRD292BPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D292CX	-	VRD292CPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D292CX	-	VRD292CPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D292DX	-	VRD292DPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D292DX	-	VRD292DPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D292EX	-	VRD292EPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D292EX	-	VRD292EPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D292FX	-	VRD292FPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D292FX	-	VRD292FPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D292GX	-	VRD292GPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D292GX	-	VRD292GPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D292HX	-	VRD292HPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D292HX	-	VRD292HPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D292JX	-	VRD292JPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D292JX	-	VRD292JPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D292KX	-	VRD292KPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D292KX	-	VRD292KPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2930X	-	VRD2930PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2930X	-	VRD2930PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2931X	-	VRD2931PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2931X	-	VRD2931PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2932X	-	VRD2932PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2932X	-	VRD2932PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2933X	-	VRD2933PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2933X	-	VRD2933PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2934X	-	VRD2934PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2934X	-	VRD2934PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2935X	-	VRD2935PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2935X	-	VRD2935PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2936X	-	VRD2936PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2936X	-	VRD2936PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2937X	-	VRD2937PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2937X	-	VRD2937PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2938X	-	VRD2938PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2938X	-	VRD2938PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2939X	-	VRD2939PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2939X	-	VRD2939PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D293AX	-	VRD293APNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D293AX	-	VRD293APTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D293BX	-	VRD293BPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D293BX	-	VRD293BPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D293CX	-	VRD293CPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D293CX	-	VRD293CPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D293DX	-	VRD293DPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D293DX	-	VRD293DPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D293EX	-	VRD293EPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D293EX	-	VRD293EPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D293FX	-	VRD293FPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D293FX	-	VRD293FPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D293GX	-	VRD293GPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D293GX	-	VRD293GPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D293HX	-	VRD293HPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D293HX	-	VRD293HPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D293JX	-	VRD293JPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D293JX	-	VRD293JPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D293KX	-	VRD293KPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D293KX	-	VRD293KPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2940X	-	VRD2940PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2940X	-	VRD2940PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2941X	-	VRD2941PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2941X	-	VRD2941PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2942X	-	VRD2942PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2942X	-	VRD2942PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2943X	-	VRD2943PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2943X	-	VRD2943PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2944X	-	VRD2944PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2944X	-	VRD2944PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2945X	-	VRD2945PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2945X	-	VRD2945PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2946X	-	VRD2946PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2946X	-	VRD2946PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2947X	-	VRD2947PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2947X	-	VRD2947PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2948X	-	VRD2948PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2948X	-	VRD2948PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2949X	-	VRD2949PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2949X	-	VRD2949PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D294AX	-	VRD294APNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D294AX	-	VRD294APTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D294BX	-	VRD294BPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D294BX	-	VRD294BPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D294CX	-	VRD294CPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D294CX	-	VRD294CPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D294DX	-	VRD294DPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D294DX	-	VRD294DPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D294EX	-	VRD294EPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D294EX	-	VRD294EPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D294FX	-	VRD294FPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D294FX	-	VRD294FPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D294GX	-	VRD294GPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D294GX	-	VRD294GPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D294HX	-	VRD294HPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D294HX	-	VRD294HPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D294JX	-	VRD294JPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D294JX	-	VRD294JPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D294KX	-	VRD294KPNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D294KX	-	VRD294KPTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2950X	-	VRD2950PNX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2950X	-	VRD2950PTX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D29A	-	R1171S291A	LVR-IC	LDO, 2.9V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D29B	-	R1171S291B	LVR-IC	LDO, 2.9V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D2A08X	-	VRD2A08NNX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A08X	-	VRD2A08NTX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A09X	-	VRD2A09NNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A09X	-	VRD2A09NTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A0JX	-	VRD2A0JNNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A0JX	-	VRD2A0JNTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A0KX	-	VRD2A0KNNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A0KX	-	VRD2A0KNTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A10X	-	VRD2A10NNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A10X	-	VRD2A10NTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A11X	-	VRD2A11NNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A11X	-	VRD2A11NTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A12X	-	VRD2A12NNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A12X	-	VRD2A12NTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A13X	-	VRD2A13NNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A13X	-	VRD2A13NTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A14X	-	VRD2A14NNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A14X	-	VRD2A14NTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A15X	-	VRD2A15NNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2A15X	-	VRD2A15NTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A16X	-	VRD2A16NNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A16X	-	VRD2A16NTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A17X	-	VRD2A17NNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A17X	-	VRD2A17NTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A18X	-	VRD2A18NNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A18X	-	VRD2A18NTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A19X	-	VRD2A19NNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A19X	-	VRD2A19NTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A1AX	-	VRD2A1ANNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A1AX	-	VRD2A1ANTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A1BX	-	VRD2A1BNNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A1BX	-	VRD2A1BNTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A1CX	-	VRD2A1CNNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A1CX	-	VRD2A1CNTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A1DX	-	VRD2A1DNNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A1DX	-	VRD2A1DNTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A1EX	-	VRD2A1ENNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A1EX	-	VRD2A1ENTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A1FX	-	VRD2A1FNNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A1FX	-	VRD2A1FNTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A1GX	-	VRD2A1GNNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A1GX	-	VRD2A1GNTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A1HX	-	VRD2A1HNNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A1HX	-	VRD2A1HNTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A1JX	-	VRD2A1JNNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A1JX	-	VRD2A1JNTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A1KX	-	VRD2A1KPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A1KX	-	VRD2A1KPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A20X	-	VRD2A20PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A20X	-	VRD2A20PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A21X	-	VRD2A21PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A21X	-	VRD2A21PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A22X	-	VRD2A22PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A22X	-	VRD2A22PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A23X	-	VRD2A23PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A23X	-	VRD2A23PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A24X	-	VRD2A24PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A24X	-	VRD2A24PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A25X	-	VRD2A25PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A25X	-	VRD2A25PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A26X	-	VRD2A26PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A26X	-	VRD2A26PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A27X	-	VRD2A27PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A27X	-	VRD2A27PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A28X	-	VRD2A28PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A28X	-	VRD2A28PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A29X	-	VRD2A29PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A29X	-	VRD2A29PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A2AX	-	VRD2A2APNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A2AX	-	VRD2A2APTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A2BX	-	VRD2A2BPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A2BX	-	VRD2A2BPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A2CX	-	VRD2A2CPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A2CX	-	VRD2A2CPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A2DX	-	VRD2A2DPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A2DX	-	VRD2A2DPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A2EX	-	VRD2A2EPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A2EX	-	VRD2A2EPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A2FX	-	VRD2A2FPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A2FX	-	VRD2A2FPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A2GX	-	VRD2A2GPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A2GX	-	VRD2A2GPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A2HX	-	VRD2A2HPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A2HX	-	VRD2A2HPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A2JX	-	VRD2A2JPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A2JX	-	VRD2A2JPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A2KX	-	VRD2A2KPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A2KX	-	VRD2A2KPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A30X	-	VRD2A30PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2A30X	-	VRD2A30PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A31X	-	VRD2A31PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A31X	-	VRD2A31PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A32X	-	VRD2A32PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A32X	-	VRD2A32PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A33X	-	VRD2A33PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A33X	-	VRD2A33PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A34X	-	VRD2A34PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A34X	-	VRD2A34PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A35X	-	VRD2A35PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A35X	-	VRD2A35PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A36X	-	VRD2A36PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A36X	-	VRD2A36PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A37X	-	VRD2A37PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A37X	-	VRD2A37PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A38X	-	VRD2A38PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A38X	-	VRD2A38PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A39X	-	VRD2A39PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A39X	-	VRD2A39PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A3AX	-	VRD2A3APNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A3AX	-	VRD2A3APTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A3BX	-	VRD2A3BPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A3BX	-	VRD2A3BPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A3CX	-	VRD2A3CPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A3CX	-	VRD2A3CPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A3DX	-	VRD2A3DPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A3DX	-	VRD2A3DPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A3EX	-	VRD2A3EPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A3EX	-	VRD2A3EPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A3FX	-	VRD2A3FPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A3FX	-	VRD2A3FPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A3GX	-	VRD2A3GPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A3GX	-	VRD2A3GPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A3HX	-	VRD2A3HPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A3HX	-	VRD2A3HPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A3JX	-	VRD2A3JPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A3JX	-	VRD2A3JPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A3KX	-	VRD2A3KPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A3KX	-	VRD2A3KPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A40X	-	VRD2A40PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A40X	-	VRD2A40PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A41X	-	VRD2A41PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A41X	-	VRD2A41PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A42X	-	VRD2A42PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A42X	-	VRD2A42PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A43X	-	VRD2A43PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A43X	-	VRD2A43PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A44X	-	VRD2A44PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A44X	-	VRD2A44PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A45X	-	VRD2A45PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A45X	-	VRD2A45PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A46X	-	VRD2A46PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A46X	-	VRD2A46PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A47X	-	VRD2A47PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A47X	-	VRD2A47PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A48X	-	VRD2A48PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A48X	-	VRD2A48PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A49X	-	VRD2A49PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A49X	-	VRD2A49PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A4AX	-	VRD2A4APNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A4AX	-	VRD2A4APTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A4BX	-	VRD2A4BPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A4BX	-	VRD2A4BPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A4CX	-	VRD2A4CPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A4CX	-	VRD2A4CPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A4DX	-	VRD2A4DPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A4DX	-	VRD2A4DPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A4EX	-	VRD2A4EPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A4EX	-	VRD2A4EPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A4FX	-	VRD2A4FPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2A4FX	-	VRD2A4FPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A4GX	-	VRD2A4GPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A4GX	-	VRD2A4GPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A4HX	-	VRD2A4HPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A4HX	-	VRD2A4HPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A4JX	-	VRD2A4JPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A4JX	-	VRD2A4JPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A4KX	-	VRD2A4KPNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A4KX	-	VRD2A4KPTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2A50X	-	VRD2A50PNX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2A50X	-	VRD2A50PTX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B08X	-	VRD2B08NNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B08X	-	VRD2B08NTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B09X	-	VRD2B09NNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B09X	-	VRD2B09NTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B0JX	-	VRD2B0JNNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B0JX	-	VRD2B0JNTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B0KX	-	VRD2B0KNNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B0KX	-	VRD2B0KNTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B10X	-	VRD2B10NNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B10X	-	VRD2B10NTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B11X	-	VRD2B11NNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B11X	-	VRD2B11NTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B12X	-	VRD2B12NNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B12X	-	VRD2B12NTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B13X	-	VRD2B13NNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B13X	-	VRD2B13NTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B14X	-	VRD2B14NNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B14X	-	VRD2B14NTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B15X	-	VRD2B15NNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B15X	-	VRD2B15NTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B16X	-	VRD2B16NNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B16X	-	VRD2B16NTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B17X	-	VRD2B17NNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B17X	-	VRD2B17NTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B18X	-	VRD2B18NNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B18X	-	VRD2B18NTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B19X	-	VRD2B19NNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B19X	-	VRD2B19NTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B1AX	-	VRD2B1ANNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B1AX	-	VRD2B1ANTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B1BX	-	VRD2B1BNNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B1BX	-	VRD2B1BNTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B1CX	-	VRD2B1CNNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B1CX	-	VRD2B1CNTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B1DX	-	VRD2B1DNNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B1DX	-	VRD2B1DNTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B1EX	-	VRD2B1ENNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B1EX	-	VRD2B1ENTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B1FX	-	VRD2B1FNNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B1FX	-	VRD2B1FNTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B1GX	-	VRD2B1GNNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B1GX	-	VRD2B1GNTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B1HX	-	VRD2B1HNNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B1HX	-	VRD2B1HNTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B1JX	-	VRD2B1JNNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B1JX	-	VRD2B1JNTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B1KX	-	VRD2B1KPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B1KX	-	VRD2B1KPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B20X	-	VRD2B20PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B20X	-	VRD2B20PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B21X	-	VRD2B21PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B21X	-	VRD2B21PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B22X	-	VRD2B22PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B22X	-	VRD2B22PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B23X	-	VRD2B23PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B23X	-	VRD2B23PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B24X	-	VRD2B24PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B24X	-	VRD2B24PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B25X	-	VRD2B25PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2B25X	-	VRD2B25PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B26X	-	VRD2B26PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B26X	-	VRD2B26PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B27X	-	VRD2B27PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B27X	-	VRD2B27PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B28X	-	VRD2B28PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B28X	-	VRD2B28PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B29X	-	VRD2B29PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B29X	-	VRD2B29PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B2AX	-	VRD2B2APNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B2AX	-	VRD2B2APTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B2BX	-	VRD2B2BPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B2BX	-	VRD2B2BPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B2CX	-	VRD2B2CPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B2CX	-	VRD2B2CPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B2DX	-	VRD2B2DPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B2DX	-	VRD2B2DPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B2EX	-	VRD2B2EPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B2EX	-	VRD2B2EPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B2FX	-	VRD2B2FPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B2FX	-	VRD2B2FPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B2GX	-	VRD2B2GPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B2GX	-	VRD2B2GPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B2HX	-	VRD2B2HPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B2HX	-	VRD2B2HPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B2JX	-	VRD2B2JPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B2JX	-	VRD2B2JPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B2KX	-	VRD2B2KPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B2KX	-	VRD2B2KPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B30X	-	VRD2B30PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B30X	-	VRD2B30PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B31X	-	VRD2B31PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B31X	-	VRD2B31PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B32X	-	VRD2B32PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B32X	-	VRD2B32PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B33X	-	VRD2B33PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B33X	-	VRD2B33PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B34X	-	VRD2B34PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B34X	-	VRD2B34PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B35X	-	VRD2B35PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B35X	-	VRD2B35PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B36X	-	VRD2B36PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B36X	-	VRD2B36PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B37X	-	VRD2B37PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B37X	-	VRD2B37PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B38X	-	VRD2B38PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B38X	-	VRD2B38PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B39X	-	VRD2B39PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B39X	-	VRD2B39PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B3AX	-	VRD2B3APNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B3AX	-	VRD2B3APTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B3BX	-	VRD2B3BPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B3BX	-	VRD2B3BPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B3CX	-	VRD2B3CPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B3CX	-	VRD2B3CPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B3DX	-	VRD2B3DPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B3DX	-	VRD2B3DPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B3EX	-	VRD2B3EPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B3EX	-	VRD2B3EPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B3FX	-	VRD2B3FPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B3FX	-	VRD2B3FPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B3GX	-	VRD2B3GPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B3GX	-	VRD2B3GPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B3HX	-	VRD2B3HPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B3HX	-	VRD2B3HPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B3JX	-	VRD2B3JPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B3JX	-	VRD2B3JPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B3KX	-	VRD2B3KPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B3KX	-	VRD2B3KPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B40X	-	VRD2B40PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2B40X	-	VRD2B40PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B41X	-	VRD2B41PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B41X	-	VRD2B41PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B42X	-	VRD2B42PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B42X	-	VRD2B42PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B43X	-	VRD2B43PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B43X	-	VRD2B43PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B44X	-	VRD2B44PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B44X	-	VRD2B44PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B45X	-	VRD2B45PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B45X	-	VRD2B45PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B46X	-	VRD2B46PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B46X	-	VRD2B46PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B47X	-	VRD2B47PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B47X	-	VRD2B47PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B48X	-	VRD2B48PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B48X	-	VRD2B48PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B49X	-	VRD2B49PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B49X	-	VRD2B49PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B4AX	-	VRD2B4APNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B4AX	-	VRD2B4APTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B4BX	-	VRD2B4BPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B4BX	-	VRD2B4BPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B4CX	-	VRD2B4CPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B4CX	-	VRD2B4CPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B4DX	-	VRD2B4DPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B4DX	-	VRD2B4DPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B4EX	-	VRD2B4EPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B4EX	-	VRD2B4EPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B4FX	-	VRD2B4FPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B4FX	-	VRD2B4FPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B4GX	-	VRD2B4GPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B4GX	-	VRD2B4GPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B4HX	-	VRD2B4HPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B4HX	-	VRD2B4HPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B4JX	-	VRD2B4JPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B4JX	-	VRD2B4JPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B4KX	-	VRD2B4KPNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B4KX	-	VRD2B4KPTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2B50X	-	VRD2B50PNX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2B50X	-	VRD2B50PTX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C08X	-	VRD2C08NNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C08X	-	VRD2C08NTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C09X	-	VRD2C09NNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C09X	-	VRD2C09NTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C0JX	-	VRD2C0JNNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C0JX	-	VRD2C0JNTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C0KX	-	VRD2C0KNNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C0KX	-	VRD2C0KNTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C10X	-	VRD2C10NNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C10X	-	VRD2C10NTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C11X	-	VRD2C11NNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C11X	-	VRD2C11NTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C12X	-	VRD2C12NNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C12X	-	VRD2C12NTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C13X	-	VRD2C13NNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C13X	-	VRD2C13NTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C14X	-	VRD2C14NNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C14X	-	VRD2C14NTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C15X	-	VRD2C15NNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C15X	-	VRD2C15NTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C16X	-	VRD2C16NNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C16X	-	VRD2C16NTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C17X	-	VRD2C17NNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C17X	-	VRD2C17NTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C18X	-	VRD2C18NNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C18X	-	VRD2C18NTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C19X	-	VRD2C19NNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C19X	-	VRD2C19NTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C1AX	-	VRD2C1ANNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2C1AX	-	VRD2C1ANTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C1BX	-	VRD2C1BNNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C1BX	-	VRD2C1BNTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C1CX	-	VRD2C1CNNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C1CX	-	VRD2C1CNTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C1DX	-	VRD2C1DNNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C1DX	-	VRD2C1DNTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C1EX	-	VRD2C1ENNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C1EX	-	VRD2C1ENTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C1FX	-	VRD2C1FNNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C1FX	-	VRD2C1FNTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C1GX	-	VRD2C1GNNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C1GX	-	VRD2C1GNTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C1HX	-	VRD2C1HNNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C1HX	-	VRD2C1HNTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C1JX	-	VRD2C1JNNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C1JX	-	VRD2C1JNTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C1KX	-	VRD2C1KPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C1KX	-	VRD2C1KPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C20X	-	VRD2C20PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C20X	-	VRD2C20PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C21X	-	VRD2C21PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C21X	-	VRD2C21PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C22X	-	VRD2C22PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C22X	-	VRD2C22PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C23X	-	VRD2C23PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C23X	-	VRD2C23PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C24X	-	VRD2C24PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C24X	-	VRD2C24PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C25X	-	VRD2C25PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C25X	-	VRD2C25PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C26X	-	VRD2C26PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C26X	-	VRD2C26PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C27X	-	VRD2C27PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C27X	-	VRD2C27PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C28X	-	VRD2C28PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C28X	-	VRD2C28PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C29X	-	VRD2C29PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C29X	-	VRD2C29PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C2AX	-	VRD2C2APNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C2AX	-	VRD2C2APTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C2BX	-	VRD2C2BPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C2BX	-	VRD2C2BPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C2CX	-	VRD2C2CPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C2CX	-	VRD2C2CPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C2DX	-	VRD2C2DPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C2DX	-	VRD2C2DPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C2EX	-	VRD2C2EPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C2EX	-	VRD2C2EPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C2FX	-	VRD2C2FPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C2FX	-	VRD2C2FPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C2GX	-	VRD2C2GPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C2GX	-	VRD2C2GPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C2HX	-	VRD2C2HPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C2HX	-	VRD2C2HPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C2JX	-	VRD2C2JPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C2JX	-	VRD2C2JPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C2KX	-	VRD2C2KPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C2KX	-	VRD2C2KPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C30X	-	VRD2C30PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C30X	-	VRD2C30PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C31X	-	VRD2C31PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C31X	-	VRD2C31PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C32X	-	VRD2C32PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C32X	-	VRD2C32PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C33X	-	VRD2C33PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C33X	-	VRD2C33PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C34X	-	VRD2C34PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C34X	-	VRD2C34PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C35X	-	VRD2C35PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2C35X	-	VRD2C35PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C36X	-	VRD2C36PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C36X	-	VRD2C36PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C37X	-	VRD2C37PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C37X	-	VRD2C37PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C38X	-	VRD2C38PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C38X	-	VRD2C38PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C39X	-	VRD2C39PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C39X	-	VRD2C39PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C3AX	-	VRD2C3APNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C3AX	-	VRD2C3APTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C3BX	-	VRD2C3BPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C3BX	-	VRD2C3BPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C3CX	-	VRD2C3CPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C3CX	-	VRD2C3CPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C3DX	-	VRD2C3DPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C3DX	-	VRD2C3DPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C3EX	-	VRD2C3EPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C3EX	-	VRD2C3EPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C3FX	-	VRD2C3FPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C3FX	-	VRD2C3FPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C3GX	-	VRD2C3GPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C3GX	-	VRD2C3GPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C3HX	-	VRD2C3HPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C3HX	-	VRD2C3HPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C3JX	-	VRD2C3JPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C3JX	-	VRD2C3JPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C3KX	-	VRD2C3KPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C3KX	-	VRD2C3KPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C40X	-	VRD2C40PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C40X	-	VRD2C40PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C41X	-	VRD2C41PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C41X	-	VRD2C41PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C42X	-	VRD2C42PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C42X	-	VRD2C42PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C43X	-	VRD2C43PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C43X	-	VRD2C43PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C44X	-	VRD2C44PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C44X	-	VRD2C44PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C45X	-	VRD2C45PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C45X	-	VRD2C45PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C46X	-	VRD2C46PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C46X	-	VRD2C46PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C47X	-	VRD2C47PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C47X	-	VRD2C47PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C48X	-	VRD2C48PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C48X	-	VRD2C48PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C49X	-	VRD2C49PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C49X	-	VRD2C49PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C4AX	-	VRD2C4APNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C4AX	-	VRD2C4APTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C4BX	-	VRD2C4BPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C4BX	-	VRD2C4BPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C4CX	-	VRD2C4CPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C4CX	-	VRD2C4CPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C4DX	-	VRD2C4DPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C4DX	-	VRD2C4DPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C4EX	-	VRD2C4EPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C4EX	-	VRD2C4EPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C4FX	-	VRD2C4FPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C4FX	-	VRD2C4FPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C4GX	-	VRD2C4GPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C4GX	-	VRD2C4GPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C4HX	-	VRD2C4HPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C4HX	-	VRD2C4HPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C4JX	-	VRD2C4JPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C4JX	-	VRD2C4JPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C4KX	-	VRD2C4KPNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2C4KX	-	VRD2C4KPTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2C50X	-	VRD2C50PNX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2C50X	-	VRD2C50PTX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D08X	-	VRD2D08NNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D08X	-	VRD2D08NTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D09X	-	VRD2D09NNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D09X	-	VRD2D09NTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D0JX	-	VRD2D0JNNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D0JX	-	VRD2D0JNTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D0KX	-	VRD2D0KNNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D0KX	-	VRD2D0KNTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D10X	-	VRD2D10NNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D10X	-	VRD2D10NTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D11X	-	VRD2D11NNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D11X	-	VRD2D11NTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D12X	-	VRD2D12NNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D12X	-	VRD2D12NTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D13X	-	VRD2D13NNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D13X	-	VRD2D13NTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D14X	-	VRD2D14NNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D14X	-	VRD2D14NTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D16X	-	VRD2D16NNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D16X	-	VRD2D16NTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D17X	-	VRD2D17NNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D17X	-	VRD2D17NTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D18X	-	VRD2D18NNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D18X	-	VRD2D18NTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D19X	-	VRD2D19NNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D19X	-	VRD2D19NTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D1AX	-	VRD2D1ANNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D1AX	-	VRD2D1ANTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D1BX	-	VRD2D1BNNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D1BX	-	VRD2D1BNTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D1CX	-	VRD2D1CNNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D1CX	-	VRD2D1CNTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D1DX	-	VRD2D1DNNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D1DX	-	VRD2D1DNTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D1GX	-	VRD2D1GNNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D1GX	-	VRD2D1GNTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D1HX	-	VRD2D1HNNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D1HX	-	VRD2D1HNTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D1JX	-	VRD2D1JNNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D1JX	-	VRD2D1JNTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D1KX	-	VRD2D1KPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D1KX	-	VRD2D1KPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D20X	-	VRD2D20PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D20X	-	VRD2D20PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D21X	-	VRD2D21PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D21X	-	VRD2D21PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D22X	-	VRD2D22PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D22X	-	VRD2D22PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D23X	-	VRD2D23PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D23X	-	VRD2D23PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D24X	-	VRD2D24PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D24X	-	VRD2D24PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D25X	-	VRD2D25PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D25X	-	VRD2D25PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D26X	-	VRD2D26PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D26X	-	VRD2D26PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D27X	-	VRD2D27PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D27X	-	VRD2D27PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D28X	-	VRD2D28PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D28X	-	VRD2D28PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D29X	-	VRD2D29PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D29X	-	VRD2D29PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D2AX	-	VRD2D2APNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D2AX	-	VRD2D2APTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D2BX	-	VRD2D2BPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D2BX	-	VRD2D2BPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D2CX	-	VRD2D2CPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D2CX	-	VRD2D2CPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D2DX	-	VRD2D2DPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2D2DX	-	VRD2D2DPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D2EX	-	VRD2D2EPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D2EX	-	VRD2D2EPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D2FX	-	VRD2D2FPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D2FX	-	VRD2D2FPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D2GX	-	VRD2D2GPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D2GX	-	VRD2D2GPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D2HX	-	VRD2D2HPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D2HX	-	VRD2D2HPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D2JX	-	VRD2D2JPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D2JX	-	VRD2D2JPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D2KX	-	VRD2D2KPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D2KX	-	VRD2D2KPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D30X	-	VRD2D30PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D30X	-	VRD2D30PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D31X	-	VRD2D31PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D31X	-	VRD2D31PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D32X	-	VRD2D32PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D32X	-	VRD2D32PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D33X	-	VRD2D33PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D33X	-	VRD2D33PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D34X	-	VRD2D34PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D34X	-	VRD2D34PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D35X	-	VRD2D35PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D35X	-	VRD2D35PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D36X	-	VRD2D36PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D36X	-	VRD2D36PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D37X	-	VRD2D37PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D37X	-	VRD2D37PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D38X	-	VRD2D38PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D38X	-	VRD2D38PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D39X	-	VRD2D39PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D39X	-	VRD2D39PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D3AX	-	VRD2D3APNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D3AX	-	VRD2D3APTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D3BX	-	VRD2D3BPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D3BX	-	VRD2D3BPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D3CX	-	VRD2D3CPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D3CX	-	VRD2D3CPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D3DX	-	VRD2D3DPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D3DX	-	VRD2D3DPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D3EX	-	VRD2D3EPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D3EX	-	VRD2D3EPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D3FX	-	VRD2D3FPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D3FX	-	VRD2D3FPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D3GX	-	VRD2D3GPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D3GX	-	VRD2D3GPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D3HX	-	VRD2D3HPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D3HX	-	VRD2D3HPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D3JX	-	VRD2D3JPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D3JX	-	VRD2D3JPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D3KX	-	VRD2D3KPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D3KX	-	VRD2D3KPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D40X	-	VRD2D40PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D40X	-	VRD2D40PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D41X	-	VRD2D41PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D41X	-	VRD2D41PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D42X	-	VRD2D42PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D42X	-	VRD2D42PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D43X	-	VRD2D43PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D43X	-	VRD2D43PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D44X	-	VRD2D44PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D44X	-	VRD2D44PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D45X	-	VRD2D45PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D45X	-	VRD2D45PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D46X	-	VRD2D46PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D46X	-	VRD2D46PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D47X	-	VRD2D47PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D47X	-	VRD2D47PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D48X	-	VRD2D48PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2D48X	-	VRD2D48PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D49X	-	VRD2D49PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D49X	-	VRD2D49PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D4AX	-	VRD2D4APNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D4AX	-	VRD2D4APTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D4BX	-	VRD2D4BPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D4BX	-	VRD2D4BPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D4CX	-	VRD2D4CPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D4CX	-	VRD2D4CPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D4DX	-	VRD2D4DPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D4DX	-	VRD2D4DPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D4EX	-	VRD2D4EPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D4EX	-	VRD2D4EPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D4FX	-	VRD2D4FPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D4FX	-	VRD2D4FPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D4GX	-	VRD2D4GPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D4GX	-	VRD2D4GPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D4HX	-	VRD2D4HPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D4HX	-	VRD2D4HPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D4JX	-	VRD2D4JPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D4JX	-	VRD2D4JPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D4KX	-	VRD2D4KPNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D4KX	-	VRD2D4KPTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D50X	-	VRD2D50PNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D50X	-	VRD2D50PTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2D5X	-	VRD2D15NNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2D5X	-	VRD2D15NTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2DEX	-	VRD2D1ENNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2DEX	-	VRD2D1ENTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2DFX	-	VRD2D1FNNX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2DFX	-	VRD2D1FNTX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E08X	-	VRD2E08NNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E08X	-	VRD2E08NTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E09X	-	VRD2E09NNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E09X	-	VRD2E09NTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E0JX	-	VRD2E0JNNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E0JX	-	VRD2E0JNTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E0KX	-	VRD2E0KNNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E0KX	-	VRD2E0KNTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E10X	-	VRD2E10NNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E10X	-	VRD2E10NTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E11X	-	VRD2E11NNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E11X	-	VRD2E11NTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E12X	-	VRD2E12NNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E12X	-	VRD2E12NTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E13X	-	VRD2E13NNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E13X	-	VRD2E13NTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E14X	-	VRD2E14NNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E14X	-	VRD2E14NTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E15X	-	VRD2E15NNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E15X	-	VRD2E15NTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E16X	-	VRD2E16NNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E16X	-	VRD2E16NTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E17X	-	VRD2E17NNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E17X	-	VRD2E17NTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E18X	-	VRD2E18NNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E18X	-	VRD2E18NTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E19X	-	VRD2E19NNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E19X	-	VRD2E19NTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E1AX	-	VRD2E1ANNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E1AX	-	VRD2E1ANTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E1BX	-	VRD2E1BNNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E1BX	-	VRD2E1BNTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E1CX	-	VRD2E1CNNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E1CX	-	VRD2E1CNTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E1DX	-	VRD2E1DNNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E1DX	-	VRD2E1DNTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E1EX	-	VRD2E1ENNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E1EX	-	VRD2E1ENTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E1FX	-	VRD2E1FNNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2E1FX	-	VRD2E1FNTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E1GX	-	VRD2E1GNNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E1GX	-	VRD2E1GNTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E1HX	-	VRD2E1HNNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E1HX	-	VRD2E1HNTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E1JX	-	VRD2E1JNNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E1JX	-	VRD2E1JNTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E1KX	-	VRD2E1KPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E1KX	-	VRD2E1KPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E20X	-	VRD2E20PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E20X	-	VRD2E20PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E21X	-	VRD2E21PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E21X	-	VRD2E21PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E22X	-	VRD2E22PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E22X	-	VRD2E22PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E23X	-	VRD2E23PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E23X	-	VRD2E23PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E24X	-	VRD2E24PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E24X	-	VRD2E24PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E25X	-	VRD2E25PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E25X	-	VRD2E25PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E26X	-	VRD2E26PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E26X	-	VRD2E26PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E27X	-	VRD2E27PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E27X	-	VRD2E27PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E28X	-	VRD2E28PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E28X	-	VRD2E28PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E29X	-	VRD2E29PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E29X	-	VRD2E29PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E2AX	-	VRD2E2APNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E2AX	-	VRD2E2APTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E2BX	-	VRD2E2BPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E2BX	-	VRD2E2BPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E2CX	-	VRD2E2CPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E2CX	-	VRD2E2CPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E2DX	-	VRD2E2DPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E2DX	-	VRD2E2DPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E2EX	-	VRD2E2EPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E2EX	-	VRD2E2EPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E2FX	-	VRD2E2FPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E2FX	-	VRD2E2FPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E2GX	-	VRD2E2GPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E2GX	-	VRD2E2GPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E2HX	-	VRD2E2HPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E2HX	-	VRD2E2HPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E2JX	-	VRD2E2JPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E2JX	-	VRD2E2JPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E2KX	-	VRD2E2KPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E2KX	-	VRD2E2KPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E30X	-	VRD2E30PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E30X	-	VRD2E30PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E31X	-	VRD2E31PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E31X	-	VRD2E31PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E32X	-	VRD2E32PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E32X	-	VRD2E32PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E33X	-	VRD2E33PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E33X	-	VRD2E33PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E34X	-	VRD2E34PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E34X	-	VRD2E34PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E35X	-	VRD2E35PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E35X	-	VRD2E35PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E36X	-	VRD2E36PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E36X	-	VRD2E36PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E37X	-	VRD2E37PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E37X	-	VRD2E37PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E38X	-	VRD2E38PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E38X	-	VRD2E38PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E39X	-	VRD2E39PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E39X	-	VRD2E39PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E3AX	-	VRD2E3APNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2E3AX	-	VRD2E3APTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E3BX	-	VRD2E3BPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E3BX	-	VRD2E3BPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E3CX	-	VRD2E3CPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E3CX	-	VRD2E3CPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E3DX	-	VRD2E3DPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E3DX	-	VRD2E3DPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E3EX	-	VRD2E3EPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E3EX	-	VRD2E3EPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E3FX	-	VRD2E3FPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E3FX	-	VRD2E3FPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E3GX	-	VRD2E3GPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E3GX	-	VRD2E3GPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E3HX	-	VRD2E3HPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E3HX	-	VRD2E3HPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E3JX	-	VRD2E3JPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E3JX	-	VRD2E3JPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E3KX	-	VRD2E3KPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E3KX	-	VRD2E3KPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E40X	-	VRD2E40PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E40X	-	VRD2E40PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E41X	-	VRD2E41PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E41X	-	VRD2E41PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E42X	-	VRD2E42PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E42X	-	VRD2E42PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E43X	-	VRD2E43PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E43X	-	VRD2E43PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E44X	-	VRD2E44PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E44X	-	VRD2E44PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E45X	-	VRD2E45PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E45X	-	VRD2E45PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E46X	-	VRD2E46PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E46X	-	VRD2E46PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E47X	-	VRD2E47PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E47X	-	VRD2E47PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E48X	-	VRD2E48PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E48X	-	VRD2E48PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E49X	-	VRD2E49PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E49X	-	VRD2E49PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E4AX	-	VRD2E4APNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E4AX	-	VRD2E4APTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E4BX	-	VRD2E4BPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E4BX	-	VRD2E4BPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E4CX	-	VRD2E4CPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E4CX	-	VRD2E4CPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E4DX	-	VRD2E4DPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E4DX	-	VRD2E4DPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E4EX	-	VRD2E4EPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E4EX	-	VRD2E4EPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E4FX	-	VRD2E4FPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E4FX	-	VRD2E4FPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E4GX	-	VRD2E4GPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E4GX	-	VRD2E4GPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E4HX	-	VRD2E4HPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E4HX	-	VRD2E4HPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E4JX	-	VRD2E4JPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E4JX	-	VRD2E4JPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E4KX	-	VRD2E4KPNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E4KX	-	VRD2E4KPTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2E50X	-	VRD2E50PNX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2E50X	-	VRD2E50PTX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F08X	-	VRD2F08NNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F08X	-	VRD2F08NTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F09X	-	VRD2F09NNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F09X	-	VRD2F09NTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F0JX	-	VRD2F0JNNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F0JX	-	VRD2F0JNTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F0KX	-	VRD2F0KNNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F0KX	-	VRD2F0KNTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F10X	-	VRD2F10NNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2F10X	-	VRD2F10NTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F11X	-	VRD2F11NNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F11X	-	VRD2F11NTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F12X	-	VRD2F12NNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F12X	-	VRD2F12NTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F13X	-	VRD2F13NNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F13X	-	VRD2F13NTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F14X	-	VRD2F14NNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F14X	-	VRD2F14NTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F15X	-	VRD2F15NNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F15X	-	VRD2F15NTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F16X	-	VRD2F16NNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F16X	-	VRD2F16NTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F17X	-	VRD2F17NNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F17X	-	VRD2F17NTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F18X	-	VRD2F18NNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F18X	-	VRD2F18NTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F19X	-	VRD2F19NNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F19X	-	VRD2F19NTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F1AX	-	VRD2F1ANNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F1AX	-	VRD2F1ANTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F1BX	-	VRD2F1BNNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F1BX	-	VRD2F1BNTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F1CX	-	VRD2F1CNNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F1CX	-	VRD2F1CNTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F1DX	-	VRD2F1DNNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F1DX	-	VRD2F1DNTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F1EX	-	VRD2F1ENNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F1EX	-	VRD2F1ENTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F1FX	-	VRD2F1FNNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F1FX	-	VRD2F1FNTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F1GX	-	VRD2F1GNNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F1GX	-	VRD2F1GNTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F1HX	-	VRD2F1HNNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F1HX	-	VRD2F1HNTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F1JX	-	VRD2F1JNNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F1JX	-	VRD2F1JNTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F1KX	-	VRD2F1KPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F1KX	-	VRD2F1KPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F20X	-	VRD2F20PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F20X	-	VRD2F20PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F21X	-	VRD2F21PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F21X	-	VRD2F21PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F22X	-	VRD2F22PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F22X	-	VRD2F22PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F23X	-	VRD2F23PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F23X	-	VRD2F23PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F24X	-	VRD2F24PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F24X	-	VRD2F24PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F25X	-	VRD2F25PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F25X	-	VRD2F25PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F26X	-	VRD2F26PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F26X	-	VRD2F26PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F27X	-	VRD2F27PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F27X	-	VRD2F27PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F28X	-	VRD2F28PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F28X	-	VRD2F28PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F29X	-	VRD2F29PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F29X	-	VRD2F29PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F2AX	-	VRD2F2APNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F2AX	-	VRD2F2APTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F2BX	-	VRD2F2BPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F2BX	-	VRD2F2BPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F2CX	-	VRD2F2CPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F2CX	-	VRD2F2CPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F2DX	-	VRD2F2DPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F2DX	-	VRD2F2DPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F2EX	-	VRD2F2EPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F2EX	-	VRD2F2EPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F2FX	-	VRD2F2FPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2F2FX	-	VRD2F2FPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F2GX	-	VRD2F2GPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F2GX	-	VRD2F2GPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F2HX	-	VRD2F2HPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F2HX	-	VRD2F2HPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F2JX	-	VRD2F2JPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F2JX	-	VRD2F2JPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F2KX	-	VRD2F2KPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F2KX	-	VRD2F2KPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F30X	-	VRD2F30PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F30X	-	VRD2F30PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F31X	-	VRD2F31PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F31X	-	VRD2F31PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F32X	-	VRD2F32PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F32X	-	VRD2F32PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F33X	-	VRD2F33PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F33X	-	VRD2F33PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F34X	-	VRD2F34PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F34X	-	VRD2F34PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F35X	-	VRD2F35PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F35X	-	VRD2F35PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F36X	-	VRD2F36PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F36X	-	VRD2F36PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F37X	-	VRD2F37PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F37X	-	VRD2F37PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F38X	-	VRD2F38PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F38X	-	VRD2F38PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F39X	-	VRD2F39PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F39X	-	VRD2F39PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F3AX	-	VRD2F3APNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F3AX	-	VRD2F3APTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F3BX	-	VRD2F3BPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F3BX	-	VRD2F3BPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F3CX	-	VRD2F3CPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F3CX	-	VRD2F3CPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F3DX	-	VRD2F3DPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F3DX	-	VRD2F3DPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F3EX	-	VRD2F3EPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F3EX	-	VRD2F3EPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F3FX	-	VRD2F3FPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F3FX	-	VRD2F3FPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F3GX	-	VRD2F3GPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F3GX	-	VRD2F3GPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F3HX	-	VRD2F3HPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F3HX	-	VRD2F3HPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F3JX	-	VRD2F3JPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F3JX	-	VRD2F3JPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F3KX	-	VRD2F3KPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F3KX	-	VRD2F3KPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F40X	-	VRD2F40PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F40X	-	VRD2F40PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F41X	-	VRD2F41PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F41X	-	VRD2F41PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F42X	-	VRD2F42PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F42X	-	VRD2F42PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F43X	-	VRD2F43PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F43X	-	VRD2F43PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F44X	-	VRD2F44PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F44X	-	VRD2F44PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F45X	-	VRD2F45PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F45X	-	VRD2F45PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F46X	-	VRD2F46PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F46X	-	VRD2F46PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F47X	-	VRD2F47PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F47X	-	VRD2F47PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F48X	-	VRD2F48PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F48X	-	VRD2F48PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F49X	-	VRD2F49PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F49X	-	VRD2F49PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F4AX	-	VRD2F4APNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2F4AX	-	VRD2F4APTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F4BX	-	VRD2F4BPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F4BX	-	VRD2F4BPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F4CX	-	VRD2F4CPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F4CX	-	VRD2F4CPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F4DX	-	VRD2F4DPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F4DX	-	VRD2F4DPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F4EX	-	VRD2F4EPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F4EX	-	VRD2F4EPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F4FX	-	VRD2F4FPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F4FX	-	VRD2F4FPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F4GX	-	VRD2F4GPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F4GX	-	VRD2F4GPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F4HX	-	VRD2F4HPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F4HX	-	VRD2F4HPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F4JX	-	VRD2F4JPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F4JX	-	VRD2F4JPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F4KX	-	VRD2F4KPNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F4KX	-	VRD2F4KPTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2F50X	-	VRD2F50PNX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2F50X	-	VRD2F50PTX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G08X	-	VRD2G08NNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G08X	-	VRD2G08NTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G09X	-	VRD2G09NNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G09X	-	VRD2G09NTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G0JX	-	VRD2G0JNNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G0JX	-	VRD2G0JNTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G0KX	-	VRD2G0KNNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G0KX	-	VRD2G0KNTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G10X	-	VRD2G10NNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G10X	-	VRD2G10NTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G11X	-	VRD2G11NNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G11X	-	VRD2G11NTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G12X	-	VRD2G12NNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G12X	-	VRD2G12NTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G13X	-	VRD2G13NNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G13X	-	VRD2G13NTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G14X	-	VRD2G14NNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G14X	-	VRD2G14NTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G15X	-	VRD2G15NNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G15X	-	VRD2G15NTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G16X	-	VRD2G16NNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G16X	-	VRD2G16NTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G17X	-	VRD2G17NNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G17X	-	VRD2G17NTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G18X	-	VRD2G18NNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G18X	-	VRD2G18NTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G19X	-	VRD2G19NNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G19X	-	VRD2G19NTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G1AX	-	VRD2G1ANNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G1AX	-	VRD2G1ANTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G1BX	-	VRD2G1BNNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G1BX	-	VRD2G1BNTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G1CX	-	VRD2G1CNNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G1CX	-	VRD2G1CNTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G1DX	-	VRD2G1DNNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G1DX	-	VRD2G1DNTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G1EX	-	VRD2G1ENNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G1EX	-	VRD2G1ENTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G1FX	-	VRD2G1FNNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G1FX	-	VRD2G1FNTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G1GX	-	VRD2G1GNNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G1GX	-	VRD2G1GNTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G1HX	-	VRD2G1HNNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G1HX	-	VRD2G1HNTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G1JX	-	VRD2G1JNNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G1JX	-	VRD2G1JNTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G1KX	-	VRD2G1KPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G1KX	-	VRD2G1KPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G20X	-	VRD2G20PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2G20X	-	VRD2G20PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G21X	-	VRD2G21PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G21X	-	VRD2G21PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G22X	-	VRD2G22PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G22X	-	VRD2G22PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G23X	-	VRD2G23PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G23X	-	VRD2G23PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G24X	-	VRD2G24PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G24X	-	VRD2G24PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G25X	-	VRD2G25PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G25X	-	VRD2G25PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G26X	-	VRD2G26PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G26X	-	VRD2G26PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G27X	-	VRD2G27PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G27X	-	VRD2G27PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G28X	-	VRD2G28PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G28X	-	VRD2G28PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G29X	-	VRD2G29PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G29X	-	VRD2G29PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G2AX	-	VRD2G2APNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G2AX	-	VRD2G2APTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G2BX	-	VRD2G2BPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G2BX	-	VRD2G2BPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G2CX	-	VRD2G2CPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G2CX	-	VRD2G2CPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G2DX	-	VRD2G2DPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G2DX	-	VRD2G2DPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G2EX	-	VRD2G2EPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G2EX	-	VRD2G2EPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G2FX	-	VRD2G2FPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G2FX	-	VRD2G2FPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G2GX	-	VRD2G2GPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G2GX	-	VRD2G2GPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G2HX	-	VRD2G2HPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G2HX	-	VRD2G2HPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G2JX	-	VRD2G2JPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G2JX	-	VRD2G2JPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G2KX	-	VRD2G2KPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G2KX	-	VRD2G2KPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G30X	-	VRD2G30PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G30X	-	VRD2G30PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G31X	-	VRD2G31PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G31X	-	VRD2G31PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G32X	-	VRD2G32PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G32X	-	VRD2G32PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G33X	-	VRD2G33PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G33X	-	VRD2G33PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G34X	-	VRD2G34PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G34X	-	VRD2G34PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G35X	-	VRD2G35PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G35X	-	VRD2G35PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G36X	-	VRD2G36PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G36X	-	VRD2G36PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G37X	-	VRD2G37PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G37X	-	VRD2G37PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G38X	-	VRD2G38PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G38X	-	VRD2G38PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G39X	-	VRD2G39PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G39X	-	VRD2G39PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G3AX	-	VRD2G3APNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G3AX	-	VRD2G3APTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G3BX	-	VRD2G3BPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G3BX	-	VRD2G3BPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G3CX	-	VRD2G3CPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G3CX	-	VRD2G3CPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G3DX	-	VRD2G3DPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G3DX	-	VRD2G3DPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G3EX	-	VRD2G3EPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G3EX	-	VRD2G3EPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G3FX	-	VRD2G3FPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2G3FX	-	VRD2G3FPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G3GX	-	VRD2G3GPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G3GX	-	VRD2G3GPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G3HX	-	VRD2G3HPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G3HX	-	VRD2G3HPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G3JX	-	VRD2G3JPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G3JX	-	VRD2G3JPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G3KX	-	VRD2G3KPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G3KX	-	VRD2G3KPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G40X	-	VRD2G40PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G40X	-	VRD2G40PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G41X	-	VRD2G41PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G41X	-	VRD2G41PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G42X	-	VRD2G42PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G42X	-	VRD2G42PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G43X	-	VRD2G43PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G43X	-	VRD2G43PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G44X	-	VRD2G44PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G44X	-	VRD2G44PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G45X	-	VRD2G45PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G45X	-	VRD2G45PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G46X	-	VRD2G46PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G46X	-	VRD2G46PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G47X	-	VRD2G47PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G47X	-	VRD2G47PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G48X	-	VRD2G48PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G48X	-	VRD2G48PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G49X	-	VRD2G49PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G49X	-	VRD2G49PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G4AX	-	VRD2G4APNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G4AX	-	VRD2G4APTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G4BX	-	VRD2G4BPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G4BX	-	VRD2G4BPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G4CX	-	VRD2G4CPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G4CX	-	VRD2G4CPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G4DX	-	VRD2G4DPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G4DX	-	VRD2G4DPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G4EX	-	VRD2G4EPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G4EX	-	VRD2G4EPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G4FX	-	VRD2G4FPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G4FX	-	VRD2G4FPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G4GX	-	VRD2G4GPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G4GX	-	VRD2G4GPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G4HX	-	VRD2G4HPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G4HX	-	VRD2G4HPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G4JX	-	VRD2G4JPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G4JX	-	VRD2G4JPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G4KX	-	VRD2G4KPNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G4KX	-	VRD2G4KPTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2G50X	-	VRD2G50PNX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2G50X	-	VRD2G50PTX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H08X	-	VRD2H08NNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H08X	-	VRD2H08NTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H09X	-	VRD2H09NNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H09X	-	VRD2H09NTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H0JX	-	VRD2H0JNNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H0JX	-	VRD2H0JNTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H0KX	-	VRD2H0KNNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H0KX	-	VRD2H0KNTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H10X	-	VRD2H10NNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H10X	-	VRD2H10NTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H11X	-	VRD2H11NNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H11X	-	VRD2H11NTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H12X	-	VRD2H12NNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H12X	-	VRD2H12NTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H13X	-	VRD2H13NNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H13X	-	VRD2H13NTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H14X	-	VRD2H14NNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H14X	-	VRD2H14NTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H15X	-	VRD2H15NNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2H15X	-	VRD2H15NTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H16X	-	VRD2H16NNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H16X	-	VRD2H16NTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H17X	-	VRD2H17NNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H17X	-	VRD2H17NTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H18X	-	VRD2H18NNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H18X	-	VRD2H18NTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H19X	-	VRD2H19NNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H19X	-	VRD2H19NTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H1AX	-	VRD2H1ANNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H1AX	-	VRD2H1ANTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H1BX	-	VRD2H1BNNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H1BX	-	VRD2H1BNTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H1CX	-	VRD2H1CNNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H1CX	-	VRD2H1CNTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H1DX	-	VRD2H1DNNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H1DX	-	VRD2H1DNTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H1EX	-	VRD2H1ENNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H1EX	-	VRD2H1ENTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H1FX	-	VRD2H1FNNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H1FX	-	VRD2H1FNTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H1GX	-	VRD2H1GNNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H1GX	-	VRD2H1GNTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H1HX	-	VRD2H1HNNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H1HX	-	VRD2H1HNTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H1JX	-	VRD2H1JNNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H1JX	-	VRD2H1JNTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H1KX	-	VRD2H1KPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H1KX	-	VRD2H1KPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H20X	-	VRD2H20PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H20X	-	VRD2H20PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H21X	-	VRD2H21PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H21X	-	VRD2H21PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H22X	-	VRD2H22PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H22X	-	VRD2H22PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H23X	-	VRD2H23PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H23X	-	VRD2H23PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H24X	-	VRD2H24PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H24X	-	VRD2H24PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H25X	-	VRD2H25PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H25X	-	VRD2H25PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H26X	-	VRD2H26PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H26X	-	VRD2H26PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H27X	-	VRD2H27PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H27X	-	VRD2H27PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H28X	-	VRD2H28PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H28X	-	VRD2H28PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H29X	-	VRD2H29PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H29X	-	VRD2H29PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H2AX	-	VRD2H2APNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H2AX	-	VRD2H2APTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H2BX	-	VRD2H2BPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H2BX	-	VRD2H2BPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H2CX	-	VRD2H2CPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H2CX	-	VRD2H2CPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H2DX	-	VRD2H2DPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H2DX	-	VRD2H2DPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H2EX	-	VRD2H2EPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H2EX	-	VRD2H2EPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H2FX	-	VRD2H2FPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H2FX	-	VRD2H2FPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H2GX	-	VRD2H2GPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H2GX	-	VRD2H2GPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H2HX	-	VRD2H2HPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H2HX	-	VRD2H2HPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H2JX	-	VRD2H2JPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H2JX	-	VRD2H2JPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H2KX	-	VRD2H2KPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H2KX	-	VRD2H2KPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H30X	-	VRD2H30PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2H30X	-	VRD2H30PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H31X	-	VRD2H31PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H31X	-	VRD2H31PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H32X	-	VRD2H32PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H32X	-	VRD2H32PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H33X	-	VRD2H33PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H33X	-	VRD2H33PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H34X	-	VRD2H34PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H34X	-	VRD2H34PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H35X	-	VRD2H35PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H35X	-	VRD2H35PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H36X	-	VRD2H36PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H36X	-	VRD2H36PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H37X	-	VRD2H37PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H37X	-	VRD2H37PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H38X	-	VRD2H38PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H38X	-	VRD2H38PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H39X	-	VRD2H39PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H39X	-	VRD2H39PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H3AX	-	VRD2H3APNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H3AX	-	VRD2H3APTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H3BX	-	VRD2H3BPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H3BX	-	VRD2H3BPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H3CX	-	VRD2H3CPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H3CX	-	VRD2H3CPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H3DX	-	VRD2H3DPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H3DX	-	VRD2H3DPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H3EX	-	VRD2H3EPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H3EX	-	VRD2H3EPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H3FX	-	VRD2H3FPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H3FX	-	VRD2H3FPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H3GX	-	VRD2H3GPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H3GX	-	VRD2H3GPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H3HX	-	VRD2H3HPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H3HX	-	VRD2H3HPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H3JX	-	VRD2H3JPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H3JX	-	VRD2H3JPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H3KX	-	VRD2H3KPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H3KX	-	VRD2H3KPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H40X	-	VRD2H40PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H40X	-	VRD2H40PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H41X	-	VRD2H41PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H41X	-	VRD2H41PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H42X	-	VRD2H42PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H42X	-	VRD2H42PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H43X	-	VRD2H43PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H43X	-	VRD2H43PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H44X	-	VRD2H44PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H44X	-	VRD2H44PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H45X	-	VRD2H45PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H45X	-	VRD2H45PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H46X	-	VRD2H46PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H46X	-	VRD2H46PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H47X	-	VRD2H47PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H47X	-	VRD2H47PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H48X	-	VRD2H48PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H48X	-	VRD2H48PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H49X	-	VRD2H49PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H49X	-	VRD2H49PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H4AX	-	VRD2H4APNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H4AX	-	VRD2H4APTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H4BX	-	VRD2H4BPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H4BX	-	VRD2H4BPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H4CX	-	VRD2H4CPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H4CX	-	VRD2H4CPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H4DX	-	VRD2H4DPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H4DX	-	VRD2H4DPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H4EX	-	VRD2H4EPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H4EX	-	VRD2H4EPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H4FX	-	VRD2H4FPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2H4FX	-	VRD2H4FPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H4GX	-	VRD2H4GPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H4GX	-	VRD2H4GPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H4HX	-	VRD2H4HPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H4HX	-	VRD2H4HPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H4JX	-	VRD2H4JPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H4JX	-	VRD2H4JPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H4KX	-	VRD2H4KPNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H4KX	-	VRD2H4KPTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2H50X	-	VRD2H50PNX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2H50X	-	VRD2H50PTX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J08X	-	VRD2J08NNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J08X	-	VRD2J08NTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J09X	-	VRD2J09NNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J09X	-	VRD2J09NTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J0JX	-	VRD2J0JNNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J0JX	-	VRD2J0JNTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J0KX	-	VRD2J0KNNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J0KX	-	VRD2J0KNTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J10X	-	VRD2J10NNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J10X	-	VRD2J10NTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J11X	-	VRD2J11NNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J11X	-	VRD2J11NTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J12X	-	VRD2J12NNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J12X	-	VRD2J12NTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J13X	-	VRD2J13NNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J13X	-	VRD2J13NTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J14X	-	VRD2J14NNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J14X	-	VRD2J14NTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J15X	-	VRD2J15NNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J15X	-	VRD2J15NTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J16X	-	VRD2J16NNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J16X	-	VRD2J16NTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J17X	-	VRD2J17NNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J17X	-	VRD2J17NTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J18X	-	VRD2J18NNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J18X	-	VRD2J18NTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J19X	-	VRD2J19NNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J19X	-	VRD2J19NTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J1AX	-	VRD2J1ANNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J1AX	-	VRD2J1ANTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J1BX	-	VRD2J1BNNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J1BX	-	VRD2J1BNTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J1CX	-	VRD2J1CNNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J1CX	-	VRD2J1CNTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J1DX	-	VRD2J1DNNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J1DX	-	VRD2J1DNTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J1EX	-	VRD2J1ENNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J1EX	-	VRD2J1ENTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J1FX	-	VRD2J1FNNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J1FX	-	VRD2J1FNTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J1GX	-	VRD2J1GNNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J1GX	-	VRD2J1GNTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J1HX	-	VRD2J1HNNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J1HX	-	VRD2J1HNTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J1JX	-	VRD2J1JNNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J1JX	-	VRD2J1JNTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J1KX	-	VRD2J1KPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J1KX	-	VRD2J1KPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J20X	-	VRD2J20PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J20X	-	VRD2J20PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J21X	-	VRD2J21PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J21X	-	VRD2J21PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J22X	-	VRD2J22PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J22X	-	VRD2J22PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J23X	-	VRD2J23PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J23X	-	VRD2J23PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J24X	-	VRD2J24PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J24X	-	VRD2J24PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J25X	-	VRD2J25PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2J25X	-	VRD2J25PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J26X	-	VRD2J26PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J26X	-	VRD2J26PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J27X	-	VRD2J27PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J27X	-	VRD2J27PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J28X	-	VRD2J28PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J28X	-	VRD2J28PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J29X	-	VRD2J29PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J29X	-	VRD2J29PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J2AX	-	VRD2J2APNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J2AX	-	VRD2J2APTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J2BX	-	VRD2J2BPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J2BX	-	VRD2J2BPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J2CX	-	VRD2J2CPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J2CX	-	VRD2J2CPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J2DX	-	VRD2J2DPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J2DX	-	VRD2J2DPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J2EX	-	VRD2J2EPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J2EX	-	VRD2J2EPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J2FX	-	VRD2J2FPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J2FX	-	VRD2J2FPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J2GX	-	VRD2J2GPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J2GX	-	VRD2J2GPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J2HX	-	VRD2J2HPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J2HX	-	VRD2J2HPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J2JX	-	VRD2J2JPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J2JX	-	VRD2J2JPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J2KX	-	VRD2J2KPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J2KX	-	VRD2J2KPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J30X	-	VRD2J30PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J30X	-	VRD2J30PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J31X	-	VRD2J31PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J31X	-	VRD2J31PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J32X	-	VRD2J32PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J32X	-	VRD2J32PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J33X	-	VRD2J33PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J33X	-	VRD2J33PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J34X	-	VRD2J34PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J34X	-	VRD2J34PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J35X	-	VRD2J35PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J35X	-	VRD2J35PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J36X	-	VRD2J36PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J36X	-	VRD2J36PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J37X	-	VRD2J37PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J37X	-	VRD2J37PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J38X	-	VRD2J38PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J38X	-	VRD2J38PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J39X	-	VRD2J39PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J39X	-	VRD2J39PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J3AX	-	VRD2J3APNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J3AX	-	VRD2J3APTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J3BX	-	VRD2J3BPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J3BX	-	VRD2J3BPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J3CX	-	VRD2J3CPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J3CX	-	VRD2J3CPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J3DX	-	VRD2J3DPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J3DX	-	VRD2J3DPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J3EX	-	VRD2J3EPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J3EX	-	VRD2J3EPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J3FX	-	VRD2J3FPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J3FX	-	VRD2J3FPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J3GX	-	VRD2J3GPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J3GX	-	VRD2J3GPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J3HX	-	VRD2J3HPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J3HX	-	VRD2J3HPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J3JX	-	VRD2J3JPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J3JX	-	VRD2J3JPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J3KX	-	VRD2J3KPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J3KX	-	VRD2J3KPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J40X	-	VRD2J40PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2J40X	-	VRD2J40PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J41X	-	VRD2J41PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J41X	-	VRD2J41PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J42X	-	VRD2J42PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J42X	-	VRD2J42PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J43X	-	VRD2J43PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J43X	-	VRD2J43PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J44X	-	VRD2J44PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J44X	-	VRD2J44PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J45X	-	VRD2J45PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J45X	-	VRD2J45PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J46X	-	VRD2J46PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J46X	-	VRD2J46PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J47X	-	VRD2J47PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J47X	-	VRD2J47PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J48X	-	VRD2J48PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J48X	-	VRD2J48PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J49X	-	VRD2J49PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J49X	-	VRD2J49PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J4AX	-	VRD2J4APNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J4AX	-	VRD2J4APTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J4BX	-	VRD2J4BPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J4BX	-	VRD2J4BPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J4CX	-	VRD2J4CPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J4CX	-	VRD2J4CPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J4DX	-	VRD2J4DPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J4DX	-	VRD2J4DPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J4EX	-	VRD2J4EPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J4EX	-	VRD2J4EPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J4FX	-	VRD2J4FPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J4FX	-	VRD2J4FPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J4GX	-	VRD2J4GPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J4GX	-	VRD2J4GPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J4HX	-	VRD2J4HPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J4HX	-	VRD2J4HPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J4JX	-	VRD2J4JPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J4JX	-	VRD2J4JPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J4KX	-	VRD2J4KPNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J4KX	-	VRD2J4KPTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2J50X	-	VRD2J50PNX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2J50X	-	VRD2J50PTX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K08X	-	VRD2K08NNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K08X	-	VRD2K08NTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K09X	-	VRD2K09NNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K09X	-	VRD2K09NTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K0JX	-	VRD2K0JNNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K0JX	-	VRD2K0JNTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K0KX	-	VRD2K0KNNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K0KX	-	VRD2K0KNTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K10X	-	VRD2K10NNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K10X	-	VRD2K10NTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K11X	-	VRD2K11NNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K11X	-	VRD2K11NTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K12X	-	VRD2K12NNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K12X	-	VRD2K12NTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K13X	-	VRD2K13NNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K13X	-	VRD2K13NTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K14X	-	VRD2K14NNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K14X	-	VRD2K14NTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K15X	-	VRD2K15NNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K15X	-	VRD2K15NTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K16X	-	VRD2K16NNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K16X	-	VRD2K16NTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K17X	-	VRD2K17NNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K17X	-	VRD2K17NTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K18X	-	VRD2K18NNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K18X	-	VRD2K18NTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K19X	-	VRD2K19NNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K19X	-	VRD2K19NTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K1AX	-	VRD2K1ANNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2K1AX	-	VRD2K1ANTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K1BX	-	VRD2K1BNNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K1BX	-	VRD2K1BNTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K1CX	-	VRD2K1CNNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K1CX	-	VRD2K1CNTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K1DX	-	VRD2K1DNNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K1DX	-	VRD2K1DNTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K1EX	-	VRD2K1ENNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K1EX	-	VRD2K1ENTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K1FX	-	VRD2K1FNNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K1FX	-	VRD2K1FNTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K1GX	-	VRD2K1GNNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K1GX	-	VRD2K1GNTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K1HX	-	VRD2K1HNNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K1HX	-	VRD2K1HNTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K1JX	-	VRD2K1JNNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K1JX	-	VRD2K1JNTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K1KX	-	VRD2K1KPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K1KX	-	VRD2K1KPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K20X	-	VRD2K20PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K20X	-	VRD2K20PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K21X	-	VRD2K21PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K21X	-	VRD2K21PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K22X	-	VRD2K22PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K22X	-	VRD2K22PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K23X	-	VRD2K23PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K23X	-	VRD2K23PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K24X	-	VRD2K24PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K24X	-	VRD2K24PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K25X	-	VRD2K25PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K25X	-	VRD2K25PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K26X	-	VRD2K26PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K26X	-	VRD2K26PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K27X	-	VRD2K27PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K27X	-	VRD2K27PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K28X	-	VRD2K28PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K28X	-	VRD2K28PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K29X	-	VRD2K29PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K29X	-	VRD2K29PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K2AX	-	VRD2K2APNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K2AX	-	VRD2K2APTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K2BX	-	VRD2K2BPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K2BX	-	VRD2K2BPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K2CX	-	VRD2K2CPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K2CX	-	VRD2K2CPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K2DX	-	VRD2K2DPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K2DX	-	VRD2K2DPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K2EX	-	VRD2K2EPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K2EX	-	VRD2K2EPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K2FX	-	VRD2K2FPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K2FX	-	VRD2K2FPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K2GX	-	VRD2K2GPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K2GX	-	VRD2K2GPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K2HX	-	VRD2K2HPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K2HX	-	VRD2K2HPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K2JX	-	VRD2K2JPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K2JX	-	VRD2K2JPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K2KX	-	VRD2K2KPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K2KX	-	VRD2K2KPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K30X	-	VRD2K30PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K30X	-	VRD2K30PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K31X	-	VRD2K31PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K31X	-	VRD2K31PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K32X	-	VRD2K32PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K32X	-	VRD2K32PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K33X	-	VRD2K33PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K33X	-	VRD2K33PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K34X	-	VRD2K34PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K34X	-	VRD2K34PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K35X	-	VRD2K35PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2K35X	-	VRD2K35PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K36X	-	VRD2K36PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K36X	-	VRD2K36PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K37X	-	VRD2K37PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K37X	-	VRD2K37PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K38X	-	VRD2K38PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K38X	-	VRD2K38PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K39X	-	VRD2K39PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K39X	-	VRD2K39PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K3AX	-	VRD2K3APNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K3AX	-	VRD2K3APTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K3BX	-	VRD2K3BPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K3BX	-	VRD2K3BPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K3CX	-	VRD2K3CPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K3CX	-	VRD2K3CPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K3DX	-	VRD2K3DPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K3DX	-	VRD2K3DPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K3EX	-	VRD2K3EPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K3EX	-	VRD2K3EPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K3FX	-	VRD2K3FPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K3FX	-	VRD2K3FPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K3GX	-	VRD2K3GPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K3GX	-	VRD2K3GPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K3HX	-	VRD2K3HPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K3HX	-	VRD2K3HPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K3JX	-	VRD2K3JPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K3JX	-	VRD2K3JPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K3KX	-	VRD2K3KPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K3KX	-	VRD2K3KPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K40X	-	VRD2K40PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K40X	-	VRD2K40PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K41X	-	VRD2K41PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K41X	-	VRD2K41PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K42X	-	VRD2K42PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K42X	-	VRD2K42PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K43X	-	VRD2K43PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K43X	-	VRD2K43PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K44X	-	VRD2K44PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K44X	-	VRD2K44PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K45X	-	VRD2K45PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K45X	-	VRD2K45PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K46X	-	VRD2K46PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K46X	-	VRD2K46PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K47X	-	VRD2K47PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K47X	-	VRD2K47PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K48X	-	VRD2K48PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K48X	-	VRD2K48PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K49X	-	VRD2K49PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K49X	-	VRD2K49PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K4AX	-	VRD2K4APNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K4AX	-	VRD2K4APTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K4BX	-	VRD2K4BPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K4BX	-	VRD2K4BPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K4CX	-	VRD2K4CPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K4CX	-	VRD2K4CPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K4DX	-	VRD2K4DPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K4DX	-	VRD2K4DPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K4EX	-	VRD2K4EPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K4EX	-	VRD2K4EPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K4FX	-	VRD2K4FPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K4FX	-	VRD2K4FPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K4GX	-	VRD2K4GPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K4GX	-	VRD2K4GPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K4HX	-	VRD2K4HPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K4HX	-	VRD2K4HPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K4JX	-	VRD2K4JPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K4JX	-	VRD2K4JPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K4KX	-	VRD2K4KPNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D2K4KX	-	VRD2K4KPTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2K50X	-	VRD2K50PNX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2K50X	-	VRD2K50PTX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D2P01	-	MMDF2P01HD	p-MOSFET	V-MOS, Dual, LogL, 12V, 3,4A, <0.18Ω	SOP-8	47	-	8d	Mot
D2P02	-	MMDF2P02HD	p-MOSFET	V-MOS, Dual, LogL, 20V, 3,3A, <0.16Ω	SOP-8	47	-	8d	Mot
D2P03	-	MMDF2P03HD	p-MOSFET	V-MOS, Dual, LogL, 30V, 3A, <0.2Ω	SOP-8	47	-	8d	Mot
D3	-	R1160D331A	LVR-IC	LDO, 3.3V±2%, 200mA, -CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
D3	-	R5220D331B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=3.3V	SON-6	dc3	DC8	7g	Ric
D3	-	RN2904AFS	Si-pnp-Digi	Dual, Sw, 50V, 80mA, 50mW, R1/R2=47k/47k	FS6	35	TD4	7b	Tos
D3	-	SN74LVC1G373DCK	CMOS-Log	D-type transparent latch with 3-state output	SC-70-6	33	Log35	7d	Ti
D3008X	-	VRD3008NNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3008X	-	VRD3008NTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3009X	-	VRD3009NNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3009X	-	VRD3009NTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D300JX	-	VRD300JNNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D300JX	-	VRD300JNTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D300KX	-	VRD300KNNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D300KX	-	VRD300KNTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3010X	-	VRD3010NNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3010X	-	VRD3010NTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3011X	-	VRD3011NNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3011X	-	VRD3011NTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3012X	-	VRD3012NNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3012X	-	VRD3012NTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3013X	-	VRD3013NNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3013X	-	VRD3013NTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3014X	-	VRD3014NNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3014X	-	VRD3014NTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3015X	-	VRD3015NNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3015X	-	VRD3015NTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3016X	-	VRD3016NNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3016X	-	VRD3016NTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3017X	-	VRD3017NNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3017X	-	VRD3017NTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3018X	-	VRD3018NNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3018X	-	VRD3018NTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3019X	-	VRD3019NNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3019X	-	VRD3019NTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D301AX	-	VRD301ANNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D301AX	-	VRD301ANTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D301BX	-	VRD301BNNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D301BX	-	VRD301BNTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D301CX	-	VRD301CNNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D301CX	-	VRD301CNTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D301DX	-	VRD301DNNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D301DX	-	VRD301DNTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D301EX	-	VRD301ENNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D301EX	-	VRD301ENTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D301FX	-	VRD301FNNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D301FX	-	VRD301FNTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D301GX	-	VRD301GNNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D301GX	-	VRD301GNTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D301HX	-	VRD301HNNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D301HX	-	VRD301HNTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D301JX	-	VRD301JNNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D301JX	-	VRD301JNTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D301KX	-	VRD301KPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D301KX	-	VRD301KPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3020X	-	VRD3020PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3020X	-	VRD3020PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3021X	-	VRD3021PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3021X	-	VRD3021PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3022X	-	VRD3022PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3022X	-	VRD3022PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3023X	-	VRD3023PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3023X	-	VRD3023PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3024X	-	VRD3024PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3024X	-	VRD3024PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3025X	-	VRD3025PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3025X	-	VRD3025PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3026X	-	VRD3026PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3026X	-	VRD3026PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3027X	-	VRD3027PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3027X	-	VRD3027PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3028X	-	VRD3028PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3028X	-	VRD3028PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3029X	-	VRD3029PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3029X	-	VRD3029PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D302AX	-	VRD302APNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D302AX	-	VRD302APTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D302BX	-	VRD302BPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D302BX	-	VRD302BPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D302CX	-	VRD302CPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D302CX	-	VRD302CPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D302DX	-	VRD302DPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D302DX	-	VRD302DPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D302EX	-	VRD302EPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D302EX	-	VRD302EPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D302FX	-	VRD302FPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D302FX	-	VRD302FPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D302GX	-	VRD302GPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D302GX	-	VRD302GPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D302HX	-	VRD302HPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D302HX	-	VRD302HPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D302JX	-	VRD302JPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D302JX	-	VRD302JPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D302KX	-	VRD302KPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D302KX	-	VRD302KPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3030X	-	VRD3030PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3030X	-	VRD3030PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3031X	-	VRD3031PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3031X	-	VRD3031PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3032X	-	VRD3032PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3032X	-	VRD3032PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3033X	-	VRD3033PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3033X	-	VRD3033PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3034X	-	VRD3034PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3034X	-	VRD3034PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3035X	-	VRD3035PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3035X	-	VRD3035PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3036X	-	VRD3036PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3036X	-	VRD3036PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3037X	-	VRD3037PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3037X	-	VRD3037PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3038X	-	VRD3038PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3038X	-	VRD3038PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3039X	-	VRD3039PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3039X	-	VRD3039PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D303AX	-	VRD303APNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D303AX	-	VRD303APTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D303BX	-	VRD303BPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D303BX	-	VRD303BPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D303CX	-	VRD303CPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D303CX	-	VRD303CPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D303DX	-	VRD303DPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D303DX	-	VRD303DPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D303EX	-	VRD303EPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D303EX	-	VRD303EPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D303FX	-	VRD303FPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D303FX	-	VRD303FPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D303GX	-	VRD303GPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D303GX	-	VRD303GPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D303HX	-	VRD303HPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D303HX	-	VRD303HPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D303JX	-	VRD303JPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D303JX	-	VRD303JPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D303KX	-	VRD303KPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D303KX	-	VRD303KPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3040X	-	VRD3040PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3040X	-	VRD3040PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3041X	-	VRD3041PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3041X	-	VRD3041PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3042X	-	VRD3042PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3042X	-	VRD3042PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3043X	-	VRD3043PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3043X	-	VRD3043PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3044X	-	VRD3044PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3044X	-	VRD3044PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3045X	-	VRD3045PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3045X	-	VRD3045PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3046X	-	VRD3046PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3046X	-	VRD3046PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3047X	-	VRD3047PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3047X	-	VRD3047PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3048X	-	VRD3048PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3048X	-	VRD3048PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3049X	-	VRD3049PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3049X	-	VRD3049PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D304AX	-	VRD304APNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D304AX	-	VRD304APTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D304BX	-	VRD304BPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D304BX	-	VRD304BPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D304CX	-	VRD304CPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D304CX	-	VRD304CPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D304DX	-	VRD304DPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D304DX	-	VRD304DPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D304EX	-	VRD304EPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D304EX	-	VRD304EPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D304FX	-	VRD304FPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D304FX	-	VRD304FPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D304GX	-	VRD304GPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D304GX	-	VRD304GPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D304HX	-	VRD304HPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D304HX	-	VRD304HPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D304JX	-	VRD304JPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D304JX	-	VRD304JPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D304KX	-	VRD304KPNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D304KX	-	VRD304KPTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3050X	-	VRD3050PNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3050X	-	VRD3050PTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D30A	-	R1171S301A	LVR-IC	LDO, 3.0V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D30B	-	R1171S301B	LVR-IC	LDO, 3.0V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D3108X	-	VRD3108NNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3108X	-	VRD3108NTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3109X	-	VRD3109NNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3109X	-	VRD3109NTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D310JX	-	VRD310JNNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D310JX	-	VRD310JNTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D310KX	-	VRD310KNNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D310KX	-	VRD310KNTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3110X	-	VRD3110NNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3110X	-	VRD3110NTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3111X	-	VRD3111NNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3111X	-	VRD3111NTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3112X	-	VRD3112NNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3112X	-	VRD3112NTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3113X	-	VRD3113NNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3113X	-	VRD3113NTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3114X	-	VRD3114NNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3114X	-	VRD3114NTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3115X	-	VRD3115NNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3115X	-	VRD3115NTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3116X	-	VRD3116NNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3116X	-	VRD3116NTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3117X	-	VRD3117NNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3117X	-	VRD3117NTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3118X	-	VRD3118NNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3118X	-	VRD3118NTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3119X	-	VRD3119NNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3119X	-	VRD3119NTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D311AX	-	VRD311ANNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D311AX	-	VRD311ANTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D311BX	-	VRD311BNNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D311BX	-	VRD311BNTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D311CX	-	VRD311CNNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D311CX	-	VRD311CNTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D311DX	-	VRD311DNNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D311DX	-	VRD311DNTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D311EX	-	VRD311ENNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D311EX	-	VRD311ENTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D311FX	-	VRD311FNNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D311FX	-	VRD311FNTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D311GX	-	VRD311GNNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D311GX	-	VRD311GNTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D311HX	-	VRD311HNNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D311HX	-	VRD311HNTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D311JX	-	VRD311JNNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D311JX	-	VRD311JNTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D311KX	-	VRD311KPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D311KX	-	VRD311KPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3120X	-	VRD3120PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3120X	-	VRD3120PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3121X	-	VRD3121PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3121X	-	VRD3121PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3122X	-	VRD3122PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3122X	-	VRD3122PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3123X	-	VRD3123PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3123X	-	VRD3123PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3124X	-	VRD3124PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3124X	-	VRD3124PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3125X	-	VRD3125PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3125X	-	VRD3125PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3126X	-	VRD3126PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3126X	-	VRD3126PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3127X	-	VRD3127PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3127X	-	VRD3127PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3128X	-	VRD3128PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3128X	-	VRD3128PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3129X	-	VRD3129PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3129X	-	VRD3129PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D312AX	-	VRD312APNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D312AX	-	VRD312APTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D312BX	-	VRD312BPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D312BX	-	VRD312BPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D312CX	-	VRD312CPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D312CX	-	VRD312CPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D312DX	-	VRD312DPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D312DX	-	VRD312DPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D312EX	-	VRD312EPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D312EX	-	VRD312EPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D312FX	-	VRD312FPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D312FX	-	VRD312FPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D312GX	-	VRD312GPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D312GX	-	VRD312GPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D312HX	-	VRD312HPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D312HX	-	VRD312HPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D312JX	-	VRD312JPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D312JX	-	VRD312JPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D312KX	-	VRD312KPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D312KX	-	VRD312KPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3130X	-	VRD3130PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3130X	-	VRD3130PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3131X	-	VRD3131PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3131X	-	VRD3131PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3132X	-	VRD3132PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3132X	-	VRD3132PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3133X	-	VRD3133PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3133X	-	VRD3133PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3134X	-	VRD3134PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3134X	-	VRD3134PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3135X	-	VRD3135PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3135X	-	VRD3135PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3136X	-	VRD3136PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3136X	-	VRD3136PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3137X	-	VRD3137PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3137X	-	VRD3137PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3138X	-	VRD3138PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3138X	-	VRD3138PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3139X	-	VRD3139PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3139X	-	VRD3139PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D313AX	-	VRD313APNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D313AX	-	VRD313APTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D313BX	-	VRD313BPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D313BX	-	VRD313BPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D313CX	-	VRD313CPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D313CX	-	VRD313CPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D313DX	-	VRD313DPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D313DX	-	VRD313DPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D313EX	-	VRD313EPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D313EX	-	VRD313EPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D313FX	-	VRD313FPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D313FX	-	VRD313FPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D313GX	-	VRD313GPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D313GX	-	VRD313GPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D313HX	-	VRD313HPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D313HX	-	VRD313HPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D313JX	-	VRD313JPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D313JX	-	VRD313JPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D313KX	-	VRD313KPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D313KX	-	VRD313KPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3140X	-	VRD3140PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3140X	-	VRD3140PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3141X	-	VRD3141PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3141X	-	VRD3141PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3142X	-	VRD3142PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3142X	-	VRD3142PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3143X	-	VRD3143PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3143X	-	VRD3143PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3144X	-	VRD3144PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3144X	-	VRD3144PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3145X	-	VRD3145PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3145X	-	VRD3145PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3146X	-	VRD3146PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3146X	-	VRD3146PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3147X	-	VRD3147PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3147X	-	VRD3147PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3148X	-	VRD3148PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3148X	-	VRD3148PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3149X	-	VRD3149PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3149X	-	VRD3149PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D314AX	-	VRD314APNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D314AX	-	VRD314APTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D314BX	-	VRD314BPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D314BX	-	VRD314BPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D314CX	-	VRD314CPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D314CX	-	VRD314CPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D314DX	-	VRD314DPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D314DX	-	VRD314DPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D314EX	-	VRD314EPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D314EX	-	VRD314EPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D314FX	-	VRD314FPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D314FX	-	VRD314FPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D314GX	-	VRD314GPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D314GX	-	VRD314GPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D314HX	-	VRD314HPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D314HX	-	VRD314HPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D314JX	-	VRD314JPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D314JX	-	VRD314JPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D314KX	-	VRD314KPNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D314KX	-	VRD314KPTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3150X	-	VRD3150PNX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3150X	-	VRD3150PTX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D31A	-	R1171S311A	LVR-IC	LDO, 3.1V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D31B	-	R1171S311B	LVR-IC	LDO, 3.1V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D32	-	BAS70-07S	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323-6L	35dw	-	7b	Ste
D3208X	-	VRD3208NNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3208X	-	VRD3208NTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3209X	-	VRD3209NNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3209X	-	VRD3209NTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D320JX	-	VRD320JNNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D320JX	-	VRD320JNTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D320KX	-	VRD320KNNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D320KX	-	VRD320KNTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3210X	-	VRD3210NNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3210X	-	VRD3210NTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3211X	-	VRD3211NNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3211X	-	VRD3211NTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3212X	-	VRD3212NNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3212X	-	VRD3212NTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3213X	-	VRD3213NNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3213X	-	VRD3213NTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3214X	-	VRD3214NNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3214X	-	VRD3214NTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3215X	-	VRD3215NNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3215X	-	VRD3215NTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3216X	-	VRD3216NNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3216X	-	VRD3216NTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3217X	-	VRD3217NNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3217X	-	VRD3217NTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3218X	-	VRD3218NNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3218X	-	VRD3218NTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3219X	-	VRD3219NNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3219X	-	VRD3219NTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D321AX	-	VRD321ANNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D321AX	-	VRD321ANTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D321BX	-	VRD321BNNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D321BX	-	VRD321BNTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D321CX	-	VRD321CNNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D321CX	-	VRD321CNTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D321DX	-	VRD321DNNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D321DX	-	VRD321DNTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D321EX	-	VRD321ENNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D321EX	-	VRD321ENTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D321FX	-	VRD321FNNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D321FX	-	VRD321FNTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D321GX	-	VRD321GNNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D321GX	-	VRD321GNTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D321HX	-	VRD321HNNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D321HX	-	VRD321HNTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D321JX	-	VRD321JNNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D321JX	-	VRD321JNTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D321KX	-	VRD321KPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D321KX	-	VRD321KPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3220X	-	VRD3220PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3220X	-	VRD3220PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3221X	-	VRD3221PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3221X	-	VRD3221PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3222X	-	VRD3222PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3222X	-	VRD3222PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3223X	-	VRD3223PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3223X	-	VRD3223PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3224X	-	VRD3224PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3224X	-	VRD3224PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3225X	-	VRD3225PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3225X	-	VRD3225PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3226X	-	VRD3226PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3226X	-	VRD3226PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3227X	-	VRD3227PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3227X	-	VRD3227PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3228X	-	VRD3228PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3228X	-	VRD3228PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3229X	-	VRD3229PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3229X	-	VRD3229PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D322AX	-	VRD322APNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D322AX	-	VRD322APTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D322BX	-	VRD322BPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D322BX	-	VRD322BPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D322CX	-	VRD322CPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D322CX	-	VRD322CPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D322DX	-	VRD322DPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D322DX	-	VRD322DPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D322EX	-	VRD322EPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D322EX	-	VRD322EPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D322FX	-	VRD322FPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D322FX	-	VRD322FPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D322GX	-	VRD322GPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D322GX	-	VRD322GPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D322HX	-	VRD322HPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D322HX	-	VRD322HPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D322JX	-	VRD322JPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D322JX	-	VRD322JPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D322KX	-	VRD322KPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D322KX	-	VRD322KPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3230X	-	VRD3230PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3230X	-	VRD3230PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3231X	-	VRD3231PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3231X	-	VRD3231PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3232X	-	VRD3232PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3232X	-	VRD3232PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3233X	-	VRD3233PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3233X	-	VRD3233PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3234X	-	VRD3234PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3234X	-	VRD3234PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3235X	-	VRD3235PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3235X	-	VRD3235PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3236X	-	VRD3236PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3236X	-	VRD3236PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3237X	-	VRD3237PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3237X	-	VRD3237PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3238X	-	VRD3238PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3238X	-	VRD3238PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3239X	-	VRD3239PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3239X	-	VRD3239PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D323AX	-	VRD323APNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D323AX	-	VRD323APTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D323BX	-	VRD323BPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D323BX	-	VRD323BPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D323CX	-	VRD323CPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D323CX	-	VRD323CPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D323DX	-	VRD323DPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D323DX	-	VRD323DPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D323EX	-	VRD323EPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D323EX	-	VRD323EPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D323FX	-	VRD323FPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D323FX	-	VRD323FPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D323GX	-	VRD323GPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D323GX	-	VRD323GPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D323HX	-	VRD323HPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D323HX	-	VRD323HPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D323JX	-	VRD323JPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D323JX	-	VRD323JPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D323KX	-	VRD323KPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D323KX	-	VRD323KPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3240X	-	VRD3240PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3240X	-	VRD3240PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3241X	-	VRD3241PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3241X	-	VRD3241PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3242X	-	VRD3242PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3242X	-	VRD3242PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3243X	-	VRD3243PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3243X	-	VRD3243PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3244X	-	VRD3244PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3244X	-	VRD3244PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3245X	-	VRD3245PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3245X	-	VRD3245PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3246X	-	VRD3246PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3246X	-	VRD3246PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3247X	-	VRD3247PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3247X	-	VRD3247PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3248X	-	VRD3248PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3248X	-	VRD3248PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3249X	-	VRD3249PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3249X	-	VRD3249PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D324AX	-	VRD324APNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D324AX	-	VRD324APTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D324BX	-	VRD324BPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D324BX	-	VRD324BPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D324CX	-	VRD324CPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D324CX	-	VRD324CPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D324DX	-	VRD324DPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D324DX	-	VRD324DPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D324EX	-	VRD324EPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D324EX	-	VRD324EPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D324FX	-	VRD324FPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D324FX	-	VRD324FPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D324GX	-	VRD324GPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D324GX	-	VRD324GPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D324HX	-	VRD324HPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D324HX	-	VRD324HPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D324JX	-	VRD324JPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D324JX	-	VRD324JPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D324KX	-	VRD324KPNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D324KX	-	VRD324KPTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3250X	-	VRD3250PNX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3250X	-	VRD3250PTX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D32A	-	R1171S321A	LVR-IC	LDO, 3.2V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D32B	-	R1171S321B	LVR-IC	LDO, 3.2V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D33	-	BAS70-08S	Si-diode	Triple, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-323-6L	33dd	-	7b	Ste
D3308X	-	VRD3308NNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3308X	-	VRD3308NTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3309X	-	VRD3309NNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3309X	-	VRD3309NTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D330JX	-	VRD330JNNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D330JX	-	VRD330JNTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D330KX	-	VRD330KNNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D330KX	-	VRD330KNTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3310X	-	VRD3310NNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3310X	-	VRD3310NTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3311X	-	VRD3311NNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3311X	-	VRD3311NTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3312X	-	VRD3312NNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3312X	-	VRD3312NTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3313X	-	VRD3313NNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3313X	-	VRD3313NTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3314X	-	VRD3314NNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3314X	-	VRD3314NTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3315X	-	VRD3315NNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3315X	-	VRD3315NTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3316X	-	VRD3316NNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3316X	-	VRD3316NTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3317X	-	VRD3317NNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3317X	-	VRD3317NTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3318X	-	VRD3318NNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3318X	-	VRD3318NTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3319X	-	VRD3319NNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3319X	-	VRD3319NTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D331AX	-	VRD331ANNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D331AX	-	VRD331ANTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D331BX	-	VRD331BNNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D331BX	-	VRD331BNTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D331CX	-	VRD331CNNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D331CX	-	VRD331CNTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D331DX	-	VRD331DNNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D331DX	-	VRD331DNTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D331EX	-	VRD331ENNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D331EX	-	VRD331ENTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D331FX	-	VRD331FNNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D331FX	-	VRD331FNTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D331GX	-	VRD331GNNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D331GX	-	VRD331GNTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D331HX	-	VRD331HNNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D331HX	-	VRD331HNTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D331JX	-	VRD331JNNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D331JX	-	VRD331JNTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D331KX	-	VRD331KPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D331KX	-	VRD331KPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3320X	-	VRD3320PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3320X	-	VRD3320PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3321X	-	VRD3321PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3321X	-	VRD3321PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3322X	-	VRD3322PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3322X	-	VRD3322PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3323X	-	VRD3323PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3323X	-	VRD3323PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3324X	-	VRD3324PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3324X	-	VRD3324PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3325X	-	VRD3325PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3325X	-	VRD3325PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3326X	-	VRD3326PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3326X	-	VRD3326PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3327X	-	VRD3327PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3327X	-	VRD3327PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3328X	-	VRD3328PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3328X	-	VRD3328PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3329X	-	VRD3329PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3329X	-	VRD3329PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D332AX	-	VRD332APNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D332AX	-	VRD332APTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D332BX	-	VRD332BPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D332BX	-	VRD332BPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D332CX	-	VRD332CPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D332CX	-	VRD332CPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D332DX	-	VRD332DPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D332DX	-	VRD332DPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D332EX	-	VRD332EPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D332EX	-	VRD332EPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D332FX	-	VRD332FPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D332FX	-	VRD332FPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D332GX	-	VRD332GPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D332GX	-	VRD332GPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D332HX	-	VRD332HPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D332HX	-	VRD332HPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D332JX	-	VRD332JPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D332JX	-	VRD332JPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D332KX	-	VRD332KPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D332KX	-	VRD332KPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3330X	-	VRD3330PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3330X	-	VRD3330PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3331X	-	VRD3331PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3331X	-	VRD3331PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3332X	-	VRD3332PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3332X	-	VRD3332PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3333X	-	VRD3333PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3333X	-	VRD3333PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3334X	-	VRD3334PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3334X	-	VRD3334PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3335X	-	VRD3335PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3335X	-	VRD3335PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3336X	-	VRD3336PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3336X	-	VRD3336PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3337X	-	VRD3337PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3337X	-	VRD3337PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3338X	-	VRD3338PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3338X	-	VRD3338PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3339X	-	VRD3339PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3339X	-	VRD3339PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D333AX	-	VRD333APNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D333AX	-	VRD333APTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D333BX	-	VRD333BPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D333BX	-	VRD333BPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D333CX	-	VRD333CPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D333CX	-	VRD333CPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D333DX	-	VRD333DPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D333DX	-	VRD333DPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D333EX	-	VRD333EPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D333EX	-	VRD333EPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D333FX	-	VRD333FPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D333FX	-	VRD333FPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D333GX	-	VRD333GPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D333GX	-	VRD333GPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D333HX	-	VRD333HPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D333HX	-	VRD333HPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D333JX	-	VRD333JPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D333JX	-	VRD333JPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D333KX	-	VRD333KPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D333KX	-	VRD333KPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3340X	-	VRD3340PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3340X	-	VRD3340PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3341X	-	VRD3341PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3341X	-	VRD3341PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3342X	-	VRD3342PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3342X	-	VRD3342PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3343X	-	VRD3343PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3343X	-	VRD3343PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3344X	-	VRD3344PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3344X	-	VRD3344PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3345X	-	VRD3345PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3345X	-	VRD3345PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3346X	-	VRD3346PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3346X	-	VRD3346PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3347X	-	VRD3347PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3347X	-	VRD3347PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3348X	-	VRD3348PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3348X	-	VRD3348PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3349X	-	VRD3349PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3349X	-	VRD3349PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D334AX	-	VRD334APNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D334AX	-	VRD334APTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D334BX	-	VRD334BPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D334BX	-	VRD334BPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D334CX	-	VRD334CPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D334CX	-	VRD334CPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D334DX	-	VRD334DPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D334DX	-	VRD334DPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D334EX	-	VRD334EPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D334EX	-	VRD334EPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D334FX	-	VRD334FPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D334FX	-	VRD334FPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D334GX	-	VRD334GPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D334GX	-	VRD334GPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D334HX	-	VRD334HPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D334HX	-	VRD334HPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D334JX	-	VRD334JPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D334JX	-	VRD334JPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D334KX	-	VRD334KPNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D334KX	-	VRD334KPTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3350X	-	VRD3350PNX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3350X	-	VRD3350PTX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D33A	-	R1171S331A	LVR-IC	LDO, 3.3V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D33B	-	R1171S331B	LVR-IC	LDO, 3.3V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D3408X	-	VRD3408NNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3408X	-	VRD3408NTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3409X	-	VRD3409NNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3409X	-	VRD3409NTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D340JX	-	VRD340JNNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D340JX	-	VRD340JNTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D340KX	-	VRD340KNNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D340KX	-	VRD340KNTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3410X	-	VRD3410NNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3410X	-	VRD3410NTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3411X	-	VRD3411NNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3411X	-	VRD3411NTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3412X	-	VRD3412NNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3412X	-	VRD3412NTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3413X	-	VRD3413NNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3413X	-	VRD3413NTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3414X	-	VRD3414NNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3414X	-	VRD3414NTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3415X	-	VRD3415NNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3415X	-	VRD3415NTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3416X	-	VRD3416NNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3416X	-	VRD3416NTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3417X	-	VRD3417NNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3417X	-	VRD3417NTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3418X	-	VRD3418NNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3418X	-	VRD3418NTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3419X	-	VRD3419NNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3419X	-	VRD3419NTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D341AX	-	VRD341ANNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D341AX	-	VRD341ANTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D341BX	-	VRD341BNNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D341BX	-	VRD341BNTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D341CX	-	VRD341CNNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D341CX	-	VRD341CNTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D341DX	-	VRD341DNNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D341DX	-	VRD341DNTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D341EX	-	VRD341ENNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D341EX	-	VRD341ENTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D341FX	-	VRD341FNNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D341FX	-	VRD341FNTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D341GX	-	VRD341GNNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D341GX	-	VRD341GNTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D341HX	-	VRD341HNNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D341HX	-	VRD341HNTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D341JX	-	VRD341JNNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D341JX	-	VRD341JNTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D341KX	-	VRD341KPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D341KX	-	VRD341KPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3420X	-	VRD3420PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3420X	-	VRD3420PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3421X	-	VRD3421PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3421X	-	VRD3421PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3422X	-	VRD3422PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3422X	-	VRD3422PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3423X	-	VRD3423PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3423X	-	VRD3423PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3424X	-	VRD3424PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3424X	-	VRD3424PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3425X	-	VRD3425PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3425X	-	VRD3425PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3426X	-	VRD3426PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3426X	-	VRD3426PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3427X	-	VRD3427PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3427X	-	VRD3427PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3428X	-	VRD3428PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3428X	-	VRD3428PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3429X	-	VRD3429PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3429X	-	VRD3429PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D342AX	-	VRD342APNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D342AX	-	VRD342APTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D342BX	-	VRD342BPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D342BX	-	VRD342BPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D342CX	-	VRD342CPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D342CX	-	VRD342CPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D342DX	-	VRD342DPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D342DX	-	VRD342DPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D342EX	-	VRD342EPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D342EX	-	VRD342EPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D342FX	-	VRD342FPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D342FX	-	VRD342FPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D342GX	-	VRD342GPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D342GX	-	VRD342GPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D342HX	-	VRD342HPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D342HX	-	VRD342HPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D342JX	-	VRD342JPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D342JX	-	VRD342JPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D342KX	-	VRD342KPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D342KX	-	VRD342KPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3430X	-	VRD3430PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3430X	-	VRD3430PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3431X	-	VRD3431PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3431X	-	VRD3431PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3432X	-	VRD3432PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3432X	-	VRD3432PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3433X	-	VRD3433PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3433X	-	VRD3433PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3434X	-	VRD3434PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3434X	-	VRD3434PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3435X	-	VRD3435PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3435X	-	VRD3435PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3436X	-	VRD3436PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3436X	-	VRD3436PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3437X	-	VRD3437PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3437X	-	VRD3437PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3438X	-	VRD3438PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3438X	-	VRD3438PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3439X	-	VRD3439PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3439X	-	VRD3439PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D343AX	-	VRD343APNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D343AX	-	VRD343APTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D343BX	-	VRD343BPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D343BX	-	VRD343BPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D343CX	-	VRD343CPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D343CX	-	VRD343CPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D343DX	-	VRD343DPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D343DX	-	VRD343DPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D343EX	-	VRD343EPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D343EX	-	VRD343EPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D343FX	-	VRD343FPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D343FX	-	VRD343FPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D343GX	-	VRD343GPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D343GX	-	VRD343GPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D343HX	-	VRD343HPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D343HX	-	VRD343HPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D343JX	-	VRD343JPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D343JX	-	VRD343JPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D343KX	-	VRD343KPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D343KX	-	VRD343KPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3440X	-	VRD3440PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3440X	-	VRD3440PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3441X	-	VRD3441PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3441X	-	VRD3441PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3442X	-	VRD3442PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3442X	-	VRD3442PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3443X	-	VRD3443PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3443X	-	VRD3443PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3444X	-	VRD3444PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3444X	-	VRD3444PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3445X	-	VRD3445PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3445X	-	VRD3445PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3446X	-	VRD3446PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3446X	-	VRD3446PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3447X	-	VRD3447PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3447X	-	VRD3447PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3448X	-	VRD3448PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3448X	-	VRD3448PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3449X	-	VRD3449PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3449X	-	VRD3449PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D344AX	-	VRD344APNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D344AX	-	VRD344APTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D344BX	-	VRD344BPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D344BX	-	VRD344BPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D344CX	-	VRD344CPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D344CX	-	VRD344CPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D344DX	-	VRD344DPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D344DX	-	VRD344DPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D344EX	-	VRD344EPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D344EX	-	VRD344EPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D344FX	-	VRD344FPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D344FX	-	VRD344FPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D344GX	-	VRD344GPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D344GX	-	VRD344GPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D344HX	-	VRD344HPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D344HX	-	VRD344HPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D344JX	-	VRD344JPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D344JX	-	VRD344JPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D344KX	-	VRD344KPNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D344KX	-	VRD344KPTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3450X	-	VRD3450PNX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3450X	-	VRD3450PTX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D34A	-	R1171S341A	LVR-IC	LDO, 3.4V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D34B	-	R1171S341B	LVR-IC	LDO, 3.4V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D3508X	-	VRD3508NNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3508X	-	VRD3508NTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3509X	-	VRD3509NNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3509X	-	VRD3509NTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D350JX	-	VRD350JNNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D350JX	-	VRD350JNTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D350KX	-	VRD350KNNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D350KX	-	VRD350KNTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3510X	-	VRD3510NNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3510X	-	VRD3510NTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3511X	-	VRD3511NNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3511X	-	VRD3511NTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3512X	-	VRD3512NNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3512X	-	VRD3512NTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3513X	-	VRD3513NNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3513X	-	VRD3513NTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3514X	-	VRD3514NNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3514X	-	VRD3514NTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3515X	-	VRD3515NNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3515X	-	VRD3515NTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3516X	-	VRD3516NNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3516X	-	VRD3516NTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3517X	-	VRD3517NNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3517X	-	VRD3517NTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3518X	-	VRD3518NNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3518X	-	VRD3518NTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3519X	-	VRD3519NNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3519X	-	VRD3519NTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D351AX	-	VRD351ANNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D351AX	-	VRD351ANTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D351BX	-	VRD351BNNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D351BX	-	VRD351BNTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D351CX	-	VRD351CNNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D351CX	-	VRD351CNTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D351DX	-	VRD351DNNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D351DX	-	VRD351DNTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D351EX	-	VRD351ENNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D351EX	-	VRD351ENTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D351FX	-	VRD351FNNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D351FX	-	VRD351FNTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D351GX	-	VRD351GNNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D351GX	-	VRD351GNTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D351HX	-	VRD351HNNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D351HX	-	VRD351HNTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D351JX	-	VRD351JNNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D351JX	-	VRD351JNTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D351KX	-	VRD351KPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D351KX	-	VRD351KPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3520X	-	VRD3520PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3520X	-	VRD3520PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3521X	-	VRD3521PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3521X	-	VRD3521PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3522X	-	VRD3522PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3522X	-	VRD3522PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3523X	-	VRD3523PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3523X	-	VRD3523PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3524X	-	VRD3524PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3524X	-	VRD3524PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3525X	-	VRD3525PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3525X	-	VRD3525PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3526X	-	VRD3526PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3526X	-	VRD3526PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3527X	-	VRD3527PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3527X	-	VRD3527PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3528X	-	VRD3528PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3528X	-	VRD3528PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3529X	-	VRD3529PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3529X	-	VRD3529PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D352AX	-	VRD352APNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D352AX	-	VRD352APTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D352BX	-	VRD352BPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D352BX	-	VRD352BPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D352CX	-	VRD352CPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D352CX	-	VRD352CPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D352DX	-	VRD352DPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D352DX	-	VRD352DPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D352EX	-	VRD352EPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D352EX	-	VRD352EPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D352FX	-	VRD352FPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D352FX	-	VRD352FPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D352GX	-	VRD352GPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D352GX	-	VRD352GPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D352HX	-	VRD352HPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D352HX	-	VRD352HPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D352JX	-	VRD352JPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D352JX	-	VRD352JPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D352KX	-	VRD352KPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D352KX	-	VRD352KPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3530X	-	VRD3530PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3530X	-	VRD3530PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3531X	-	VRD3531PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3531X	-	VRD3531PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3532X	-	VRD3532PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3532X	-	VRD3532PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3533X	-	VRD3533PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3533X	-	VRD3533PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3534X	-	VRD3534PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3534X	-	VRD3534PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3535X	-	VRD3535PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3535X	-	VRD3535PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3536X	-	VRD3536PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3536X	-	VRD3536PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3537X	-	VRD3537PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3537X	-	VRD3537PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3538X	-	VRD3538PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3538X	-	VRD3538PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3539X	-	VRD3539PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3539X	-	VRD3539PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D353AX	-	VRD353APNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D353AX	-	VRD353APTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D353BX	-	VRD353BPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D353BX	-	VRD353BPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D353CX	-	VRD353CPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D353CX	-	VRD353CPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D353DX	-	VRD353DPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D353DX	-	VRD353DPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D353EX	-	VRD353EPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D353EX	-	VRD353EPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D353FX	-	VRD353FPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D353FX	-	VRD353FPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D353GX	-	VRD353GPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D353GX	-	VRD353GPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D353HX	-	VRD353HPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D353HX	-	VRD353HPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D353JX	-	VRD353JPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D353JX	-	VRD353JPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D353KX	-	VRD353KPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D353KX	-	VRD353KPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3540X	-	VRD3540PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3540X	-	VRD3540PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3541X	-	VRD3541PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3541X	-	VRD3541PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3542X	-	VRD3542PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3542X	-	VRD3542PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3543X	-	VRD3543PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3543X	-	VRD3543PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3544X	-	VRD3544PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3544X	-	VRD3544PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3545X	-	VRD3545PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3545X	-	VRD3545PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3546X	-	VRD3546PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3546X	-	VRD3546PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3547X	-	VRD3547PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3547X	-	VRD3547PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3548X	-	VRD3548PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3548X	-	VRD3548PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3549X	-	VRD3549PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3549X	-	VRD3549PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D354AX	-	VRD354APNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D354AX	-	VRD354APTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D354BX	-	VRD354BPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D354BX	-	VRD354BPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D354CX	-	VRD354CPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D354CX	-	VRD354CPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D354DX	-	VRD354DPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D354DX	-	VRD354DPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D354EX	-	VRD354EPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D354EX	-	VRD354EPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D354FX	-	VRD354FPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D354FX	-	VRD354FPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D354GX	-	VRD354GPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D354GX	-	VRD354GPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D354HX	-	VRD354HPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D354HX	-	VRD354HPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D354JX	-	VRD354JPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D354JX	-	VRD354JPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D354KX	-	VRD354KPNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D354KX	-	VRD354KPTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3550X	-	VRD3550PNX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3550X	-	VRD3550PTX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D35A	-	R1171S351A	LVR-IC	LDO, 3.5V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D35B	-	R1171S351B	LVR-IC	LDO, 3.5V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D3608X	-	VRD3608NNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3608X	-	VRD3608NTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3609X	-	VRD3609NNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3609X	-	VRD3609NTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D360JX	-	VRD360JNNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D360JX	-	VRD360JNTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D360KX	-	VRD360KNNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D360KX	-	VRD360KNTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3610X	-	VRD3610NNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3610X	-	VRD3610NTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3611X	-	VRD3611NNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3611X	-	VRD3611NTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3612X	-	VRD3612NNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3612X	-	VRD3612NTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3613X	-	VRD3613NNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3613X	-	VRD3613NTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3614X	-	VRD3614NNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3614X	-	VRD3614NTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3615X	-	VRD3615NNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3615X	-	VRD3615NTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3616X	-	VRD3616NNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3616X	-	VRD3616NTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3617X	-	VRD3617NNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3617X	-	VRD3617NTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3618X	-	VRD3618NNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3618X	-	VRD3618NTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3619X	-	VRD3619NNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3619X	-	VRD3619NTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D361AX	-	VRD361ANNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D361AX	-	VRD361ANTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D361BX	-	VRD361BNNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D361BX	-	VRD361BNTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D361CX	-	VRD361CNNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D361CX	-	VRD361CNTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D361DX	-	VRD361DNNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D361DX	-	VRD361DNTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D361EX	-	VRD361ENNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D361EX	-	VRD361ENTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D361FX	-	VRD361FNNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D361FX	-	VRD361FNTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D361GX	-	VRD361GNNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D361GX	-	VRD361GNTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D361HX	-	VRD361HNNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D361HX	-	VRD361HNTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D361JX	-	VRD361JNNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D361JX	-	VRD361JNTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D361KX	-	VRD361KPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D361KX	-	VRD361KPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3620X	-	VRD3620PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3620X	-	VRD3620PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3621X	-	VRD3621PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3621X	-	VRD3621PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3622X	-	VRD3622PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3622X	-	VRD3622PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3623X	-	VRD3623PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3623X	-	VRD3623PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3624X	-	VRD3624PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3624X	-	VRD3624PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3625X	-	VRD3625PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3625X	-	VRD3625PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3626X	-	VRD3626PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3626X	-	VRD3626PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3627X	-	VRD3627PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3627X	-	VRD3627PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3628X	-	VRD3628PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3628X	-	VRD3628PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3629X	-	VRD3629PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3629X	-	VRD3629PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D362AX	-	VRD362APNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D362AX	-	VRD362APTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D362BX	-	VRD362BPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D362BX	-	VRD362BPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D362CX	-	VRD362CPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D362CX	-	VRD362CPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D362DX	-	VRD362DPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D362DX	-	VRD362DPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D362EX	-	VRD362EPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D362EX	-	VRD362EPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D362FX	-	VRD362FPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D362FX	-	VRD362FPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D362GX	-	VRD362GPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D362GX	-	VRD362GPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D362HX	-	VRD362HPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D362HX	-	VRD362HPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D362JX	-	VRD362JPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D362JX	-	VRD362JPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D362KX	-	VRD362KPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D362KX	-	VRD362KPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3630X	-	VRD3630PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3630X	-	VRD3630PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3631X	-	VRD3631PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3631X	-	VRD3631PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3632X	-	VRD3632PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3632X	-	VRD3632PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3633X	-	VRD3633PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3633X	-	VRD3633PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3634X	-	VRD3634PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3634X	-	VRD3634PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3635X	-	VRD3635PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3635X	-	VRD3635PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3636X	-	VRD3636PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3636X	-	VRD3636PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3637X	-	VRD3637PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3637X	-	VRD3637PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3638X	-	VRD3638PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3638X	-	VRD3638PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3639X	-	VRD3639PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3639X	-	VRD3639PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D363AX	-	VRD363APNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D363AX	-	VRD363APTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D363BX	-	VRD363BPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D363BX	-	VRD363BPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D363CX	-	VRD363CPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D363CX	-	VRD363CPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D363DX	-	VRD363DPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D363DX	-	VRD363DPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D363EX	-	VRD363EPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D363EX	-	VRD363EPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D363FX	-	VRD363FPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D363FX	-	VRD363FPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D363GX	-	VRD363GPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D363GX	-	VRD363GPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D363HX	-	VRD363HPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D363HX	-	VRD363HPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D363JX	-	VRD363JPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D363JX	-	VRD363JPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D363KX	-	VRD363KPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D363KX	-	VRD363KPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3640X	-	VRD3640PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3640X	-	VRD3640PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3641X	-	VRD3641PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3641X	-	VRD3641PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3642X	-	VRD3642PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3642X	-	VRD3642PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3643X	-	VRD3643PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3643X	-	VRD3643PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3644X	-	VRD3644PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3644X	-	VRD3644PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3645X	-	VRD3645PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3645X	-	VRD3645PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3646X	-	VRD3646PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3646X	-	VRD3646PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3647X	-	VRD3647PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3647X	-	VRD3647PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3648X	-	VRD3648PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3648X	-	VRD3648PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3649X	-	VRD3649PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3649X	-	VRD3649PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D364AX	-	VRD364APNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D364AX	-	VRD364APTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D364BX	-	VRD364BPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D364BX	-	VRD364BPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D364CX	-	VRD364CPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D364CX	-	VRD364CPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D364DX	-	VRD364DPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D364DX	-	VRD364DPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D364EX	-	VRD364EPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D364EX	-	VRD364EPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D364FX	-	VRD364FPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D364FX	-	VRD364FPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D364GX	-	VRD364GPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D364GX	-	VRD364GPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D364HX	-	VRD364HPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D364HX	-	VRD364HPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D364JX	-	VRD364JPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D364JX	-	VRD364JPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D364KX	-	VRD364KPNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D364KX	-	VRD364KPTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3650X	-	VRD3650PNX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3650X	-	VRD3650PTX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D36A	-	R1171S361A	LVR-IC	LDO, 3.6V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D36B	-	R1171S361B	LVR-IC	LDO, 3.6V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D3708X	-	VRD3708NNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3708X	-	VRD3708NTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3709X	-	VRD3709NNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3709X	-	VRD3709NTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D370JX	-	VRD370JNNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D370JX	-	VRD370JNTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D370KX	-	VRD370KNNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D370KX	-	VRD370KNTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3710X	-	VRD3710NNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3710X	-	VRD3710NTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3711X	-	VRD3711NNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3711X	-	VRD3711NTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3712X	-	VRD3712NNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3712X	-	VRD3712NTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3713X	-	VRD3713NNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3713X	-	VRD3713NTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3714X	-	VRD3714NNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3714X	-	VRD3714NTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3715X	-	VRD3715NNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3715X	-	VRD3715NTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3716X	-	VRD3716NNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3716X	-	VRD3716NTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3717X	-	VRD3717NNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3717X	-	VRD3717NTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3718X	-	VRD3718NNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3718X	-	VRD3718NTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3719X	-	VRD3719NNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3719X	-	VRD3719NTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D371AX	-	VRD371ANNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D371AX	-	VRD371ANTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D371BX	-	VRD371BNNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D371BX	-	VRD371BNTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D371CX	-	VRD371CNNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D371CX	-	VRD371CNTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D371DX	-	VRD371DNNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D371DX	-	VRD371DNTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D371EX	-	VRD371ENNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D371EX	-	VRD371ENTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D371FX	-	VRD371FNNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D371FX	-	VRD371FNTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D371GX	-	VRD371GNNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D371GX	-	VRD371GNTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D371HX	-	VRD371HNNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D371HX	-	VRD371HNTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D371JX	-	VRD371JNNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D371JX	-	VRD371JNTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D371KX	-	VRD371KPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D371KX	-	VRD371KPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3720X	-	VRD3720PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3720X	-	VRD3720PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3721X	-	VRD3721PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3721X	-	VRD3721PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3722X	-	VRD3722PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3722X	-	VRD3722PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3723X	-	VRD3723PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3723X	-	VRD3723PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3724X	-	VRD3724PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3724X	-	VRD3724PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3725X	-	VRD3725PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3725X	-	VRD3725PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3726X	-	VRD3726PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3726X	-	VRD3726PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3727X	-	VRD3727PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3727X	-	VRD3727PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3728X	-	VRD3728PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3728X	-	VRD3728PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3729X	-	VRD3729PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3729X	-	VRD3729PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D372AX	-	VRD372APNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D372AX	-	VRD372APTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D372BX	-	VRD372BPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D372BX	-	VRD372BPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D372CX	-	VRD372CPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D372CX	-	VRD372CPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D372DX	-	VRD372DPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D372DX	-	VRD372DPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D372EX	-	VRD372EPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D372EX	-	VRD372EPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D372FX	-	VRD372FPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D372FX	-	VRD372FPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D372GX	-	VRD372GPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D372GX	-	VRD372GPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D372HX	-	VRD372HPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D372HX	-	VRD372HPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D372JX	-	VRD372JPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D372JX	-	VRD372JPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D372KX	-	VRD372KPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D372KX	-	VRD372KPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3730X	-	VRD3730PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3730X	-	VRD3730PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3731X	-	VRD3731PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3731X	-	VRD3731PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3732X	-	VRD3732PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3732X	-	VRD3732PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3733X	-	VRD3733PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3733X	-	VRD3733PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3734X	-	VRD3734PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3734X	-	VRD3734PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3735X	-	VRD3735PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3735X	-	VRD3735PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3736X	-	VRD3736PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3736X	-	VRD3736PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3737X	-	VRD3737PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3737X	-	VRD3737PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3738X	-	VRD3738PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3738X	-	VRD3738PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3739X	-	VRD3739PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3739X	-	VRD3739PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D373AX	-	VRD373APNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D373AX	-	VRD373APTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D373BX	-	VRD373BPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D373BX	-	VRD373BPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D373CX	-	VRD373CPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D373CX	-	VRD373CPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D373DX	-	VRD373DPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D373DX	-	VRD373DPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D373EX	-	VRD373EPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D373EX	-	VRD373EPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D373FX	-	VRD373FPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D373FX	-	VRD373FPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D373GX	-	VRD373GPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D373GX	-	VRD373GPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D373HX	-	VRD373HPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D373HX	-	VRD373HPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D373JX	-	VRD373JPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D373JX	-	VRD373JPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D373KX	-	VRD373KPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D373KX	-	VRD373KPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3740X	-	VRD3740PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3740X	-	VRD3740PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3741X	-	VRD3741PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3741X	-	VRD3741PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3742X	-	VRD3742PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3742X	-	VRD3742PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3743X	-	VRD3743PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3743X	-	VRD3743PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3744X	-	VRD3744PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3744X	-	VRD3744PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3745X	-	VRD3745PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3745X	-	VRD3745PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3746X	-	VRD3746PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3746X	-	VRD3746PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3747X	-	VRD3747PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3747X	-	VRD3747PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3748X	-	VRD3748PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3748X	-	VRD3748PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3749X	-	VRD3749PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3749X	-	VRD3749PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D374AX	-	VRD374APNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D374AX	-	VRD374APTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D374BX	-	VRD374BPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D374BX	-	VRD374BPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D374CX	-	VRD374CPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D374CX	-	VRD374CPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D374DX	-	VRD374DPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D374DX	-	VRD374DPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D374EX	-	VRD374EPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D374EX	-	VRD374EPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D374FX	-	VRD374FPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D374FX	-	VRD374FPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D374GX	-	VRD374GPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D374GX	-	VRD374GPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D374HX	-	VRD374HPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D374HX	-	VRD374HPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D374JX	-	VRD374JPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D374JX	-	VRD374JPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D374KX	-	VRD374KPNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D374KX	-	VRD374KPTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3750X	-	VRD3750PNX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3750X	-	VRD3750PTX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D37A	-	R1171S371A	LVR-IC	LDO, 3.7V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D37B	-	R1171S371B	LVR-IC	LDO, 3.7V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D3808X	-	VRD3808NNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3808X	-	VRD3808NTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3809X	-	VRD3809NNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3809X	-	VRD3809NTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D380JX	-	VRD380JNNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D380JX	-	VRD380JNTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D380KX	-	VRD380KNNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D380KX	-	VRD380KNTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3810X	-	VRD3810NNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3810X	-	VRD3810NTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3811X	-	VRD3811NNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3811X	-	VRD3811NTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3812X	-	VRD3812NNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3812X	-	VRD3812NTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3813X	-	VRD3813NNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3813X	-	VRD3813NTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3814X	-	VRD3814NNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3814X	-	VRD3814NTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3815X	-	VRD3815NNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3815X	-	VRD3815NTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3816X	-	VRD3816NNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3816X	-	VRD3816NTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3817X	-	VRD3817NNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3817X	-	VRD3817NTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3818X	-	VRD3818NNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3818X	-	VRD3818NTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3819X	-	VRD3819NNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3819X	-	VRD3819NTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D381AX	-	VRD381ANNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D381AX	-	VRD381ANTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D381BX	-	VRD381BNNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D381BX	-	VRD381BNTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D381CX	-	VRD381CNNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D381CX	-	VRD381CNTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D381DX	-	VRD381DNNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D381DX	-	VRD381DNTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D381EX	-	VRD381ENNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D381EX	-	VRD381ENTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D381FX	-	VRD381FNNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D381FX	-	VRD381FNTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D381GX	-	VRD381GNNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D381GX	-	VRD381GNTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D381HX	-	VRD381HNNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D381HX	-	VRD381HNTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D381JX	-	VRD381JNNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D381JX	-	VRD381JNTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D381KX	-	VRD381KPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D381KX	-	VRD381KPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3820X	-	VRD3820PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3820X	-	VRD3820PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3821X	-	VRD3821PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3821X	-	VRD3821PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3822X	-	VRD3822PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3822X	-	VRD3822PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3823X	-	VRD3823PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3823X	-	VRD3823PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3824X	-	VRD3824PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3824X	-	VRD3824PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3825X	-	VRD3825PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3825X	-	VRD3825PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3826X	-	VRD3826PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3826X	-	VRD3826PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3827X	-	VRD3827PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3827X	-	VRD3827PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3828X	-	VRD3828PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3828X	-	VRD3828PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3829X	-	VRD3829PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3829X	-	VRD3829PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D382AX	-	VRD382APNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D382AX	-	VRD382APTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D382BX	-	VRD382BPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D382BX	-	VRD382BPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D382CX	-	VRD382CPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D382CX	-	VRD382CPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D382DX	-	VRD382DPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D382DX	-	VRD382DPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D382EX	-	VRD382EPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D382EX	-	VRD382EPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D382FX	-	VRD382FPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D382FX	-	VRD382FPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D382GX	-	VRD382GPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D382GX	-	VRD382GPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D382HX	-	VRD382HPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D382HX	-	VRD382HPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D382JX	-	VRD382JPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D382JX	-	VRD382JPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D382KX	-	VRD382KPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D382KX	-	VRD382KPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3830X	-	VRD3830PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3830X	-	VRD3830PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3831X	-	VRD3831PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3831X	-	VRD3831PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3832X	-	VRD3832PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3832X	-	VRD3832PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3833X	-	VRD3833PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3833X	-	VRD3833PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3834X	-	VRD3834PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3834X	-	VRD3834PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3835X	-	VRD3835PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3835X	-	VRD3835PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3836X	-	VRD3836PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3836X	-	VRD3836PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3837X	-	VRD3837PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3837X	-	VRD3837PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3838X	-	VRD3838PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3838X	-	VRD3838PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3839X	-	VRD3839PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3839X	-	VRD3839PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D383AX	-	VRD383APNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D383AX	-	VRD383APTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D383BX	-	VRD383BPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D383BX	-	VRD383BPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D383CX	-	VRD383CPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D383CX	-	VRD383CPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D383DX	-	VRD383DPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D383DX	-	VRD383DPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D383EX	-	VRD383EPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D383EX	-	VRD383EPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D383FX	-	VRD383FPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D383FX	-	VRD383FPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D383GX	-	VRD383GPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D383GX	-	VRD383GPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D383HX	-	VRD383HPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D383HX	-	VRD383HPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D383JX	-	VRD383JPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D383JX	-	VRD383JPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D383KX	-	VRD383KPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D383KX	-	VRD383KPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3840X	-	VRD3840PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3840X	-	VRD3840PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3841X	-	VRD3841PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3841X	-	VRD3841PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3842X	-	VRD3842PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3842X	-	VRD3842PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3843X	-	VRD3843PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3843X	-	VRD3843PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3844X	-	VRD3844PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3844X	-	VRD3844PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3845X	-	VRD3845PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3845X	-	VRD3845PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3846X	-	VRD3846PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3846X	-	VRD3846PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3847X	-	VRD3847PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3847X	-	VRD3847PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3848X	-	VRD3848PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3848X	-	VRD3848PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3849X	-	VRD3849PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3849X	-	VRD3849PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D384AX	-	VRD384APNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D384AX	-	VRD384APTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D384BX	-	VRD384BPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D384BX	-	VRD384BPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D384CX	-	VRD384CPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D384CX	-	VRD384CPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D384DX	-	VRD384DPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D384DX	-	VRD384DPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D384EX	-	VRD384EPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D384EX	-	VRD384EPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D384FX	-	VRD384FPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D384FX	-	VRD384FPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D384GX	-	VRD384GPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D384GX	-	VRD384GPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D384HX	-	VRD384HPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D384HX	-	VRD384HPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D384JX	-	VRD384JPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D384JX	-	VRD384JPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D384KX	-	VRD384KPNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D384KX	-	VRD384KPTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3850X	-	VRD3850PNX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3850X	-	VRD3850PTX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D38A	-	R1171S381A	LVR-IC	LDO, 3.8V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D38B	-	R1171S381B	LVR-IC	LDO, 3.8V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D3908X	-	VRD3908NNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3908X	-	VRD3908NTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3909X	-	VRD3909NNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3909X	-	VRD3909NTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D390JX	-	VRD390JNNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D390JX	-	VRD390JNTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D390KX	-	VRD390KNNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D390KX	-	VRD390KNTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3910X	-	VRD3910NNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3910X	-	VRD3910NTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3911X	-	VRD3911NNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3911X	-	VRD3911NTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3912X	-	VRD3912NNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3912X	-	VRD3912NTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3913X	-	VRD3913NNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3913X	-	VRD3913NTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3914X	-	VRD3914NNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3914X	-	VRD3914NTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3915X	-	VRD3915NNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3915X	-	VRD3915NTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3916X	-	VRD3916NNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3916X	-	VRD3916NTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3917X	-	VRD3917NNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3917X	-	VRD3917NTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3918X	-	VRD3918NNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3918X	-	VRD3918NTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3919X	-	VRD3919NNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3919X	-	VRD3919NTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D391AX	-	VRD391ANNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D391AX	-	VRD391ANTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D391BX	-	VRD391BNNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D391BX	-	VRD391BNTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D391CX	-	VRD391CNNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D391CX	-	VRD391CNTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D391DX	-	VRD391DNNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D391DX	-	VRD391DNTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D391EX	-	VRD391ENNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D391EX	-	VRD391ENTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D391FX	-	VRD391FNNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D391FX	-	VRD391FNTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D391GX	-	VRD391GNNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D391GX	-	VRD391GNTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D391HX	-	VRD391HNNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D391HX	-	VRD391HNTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D391JX	-	VRD391JNNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D391JX	-	VRD391JNTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D391KX	-	VRD391KPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D391KX	-	VRD391KPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3920X	-	VRD3920PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3920X	-	VRD3920PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3921X	-	VRD3921PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3921X	-	VRD3921PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3922X	-	VRD3922PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3922X	-	VRD3922PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3923X	-	VRD3923PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3923X	-	VRD3923PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3924X	-	VRD3924PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3924X	-	VRD3924PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3925X	-	VRD3925PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3925X	-	VRD3925PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3926X	-	VRD3926PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3926X	-	VRD3926PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3927X	-	VRD3927PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3927X	-	VRD3927PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3928X	-	VRD3928PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3928X	-	VRD3928PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3929X	-	VRD3929PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3929X	-	VRD3929PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D392AX	-	VRD392APNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D392AX	-	VRD392APTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D392BX	-	VRD392BPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D392BX	-	VRD392BPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D392CX	-	VRD392CPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D392CX	-	VRD392CPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D392DX	-	VRD392DPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D392DX	-	VRD392DPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D392EX	-	VRD392EPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D392EX	-	VRD392EPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D392FX	-	VRD392FPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D392FX	-	VRD392FPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D392GX	-	VRD392GPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D392GX	-	VRD392GPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D392HX	-	VRD392HPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D392HX	-	VRD392HPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D392JX	-	VRD392JPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D392JX	-	VRD392JPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D392KX	-	VRD392KPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D392KX	-	VRD392KPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3930X	-	VRD3930PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3930X	-	VRD3930PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3931X	-	VRD3931PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3931X	-	VRD3931PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3932X	-	VRD3932PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3932X	-	VRD3932PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3933X	-	VRD3933PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3933X	-	VRD3933PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3934X	-	VRD3934PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3934X	-	VRD3934PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3935X	-	VRD3935PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3935X	-	VRD3935PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3936X	-	VRD3936PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3936X	-	VRD3936PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3937X	-	VRD3937PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3937X	-	VRD3937PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3938X	-	VRD3938PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3938X	-	VRD3938PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3939X	-	VRD3939PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3939X	-	VRD3939PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D393AX	-	VRD393APNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D393AX	-	VRD393APTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D393BX	-	VRD393BPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D393BX	-	VRD393BPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D393CX	-	VRD393CPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D393CX	-	VRD393CPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D393DX	-	VRD393DPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D393DX	-	VRD393DPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D393EX	-	VRD393EPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D393EX	-	VRD393EPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D393FX	-	VRD393FPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D393FX	-	VRD393FPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D393GX	-	VRD393GPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D393GX	-	VRD393GPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D393HX	-	VRD393HPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D393HX	-	VRD393HPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D393JX	-	VRD393JPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D393JX	-	VRD393JPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D393KX	-	VRD393KPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D393KX	-	VRD393KPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3940X	-	VRD3940PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3940X	-	VRD3940PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3941X	-	VRD3941PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3941X	-	VRD3941PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3942X	-	VRD3942PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3942X	-	VRD3942PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3943X	-	VRD3943PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3943X	-	VRD3943PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3944X	-	VRD3944PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3944X	-	VRD3944PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3945X	-	VRD3945PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3945X	-	VRD3945PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3946X	-	VRD3946PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3946X	-	VRD3946PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3947X	-	VRD3947PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3947X	-	VRD3947PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3948X	-	VRD3948PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3948X	-	VRD3948PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3949X	-	VRD3949PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3949X	-	VRD3949PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D394AX	-	VRD394APNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D394AX	-	VRD394APTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D394BX	-	VRD394BPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D394BX	-	VRD394BPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D394CX	-	VRD394CPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D394CX	-	VRD394CPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D394DX	-	VRD394DPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D394DX	-	VRD394DPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D394EX	-	VRD394EPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D394EX	-	VRD394EPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D394FX	-	VRD394FPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D394FX	-	VRD394FPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D394GX	-	VRD394GPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D394GX	-	VRD394GPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D394HX	-	VRD394HPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D394HX	-	VRD394HPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D394JX	-	VRD394JPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D394JX	-	VRD394JPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D394KX	-	VRD394KPNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D394KX	-	VRD394KPTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3950X	-	VRD3950PNX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3950X	-	VRD3950PTX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D39A	-	R1171S391A	LVR-IC	LDO, 3.9V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D39B	-	R1171S391B	LVR-IC	LDO, 3.9V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D3A08X	-	VRD3A08NNX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A08X	-	VRD3A08NTX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A09X	-	VRD3A09NNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A09X	-	VRD3A09NTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A0JX	-	VRD3A0JNNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A0JX	-	VRD3A0JNTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A0KX	-	VRD3A0KNNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A0KX	-	VRD3A0KNTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A10X	-	VRD3A10NNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A10X	-	VRD3A10NTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A11X	-	VRD3A11NNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A11X	-	VRD3A11NTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A12X	-	VRD3A12NNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A12X	-	VRD3A12NTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A13X	-	VRD3A13NNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A13X	-	VRD3A13NTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A14X	-	VRD3A14NNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A14X	-	VRD3A14NTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A15X	-	VRD3A15NNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A15X	-	VRD3A15NTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3A16X	-	VRD3A16NNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A16X	-	VRD3A16NTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A17X	-	VRD3A17NNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A17X	-	VRD3A17NTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A18X	-	VRD3A18NNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A18X	-	VRD3A18NTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A19X	-	VRD3A19NNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A19X	-	VRD3A19NTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A1AX	-	VRD3A1ANNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A1AX	-	VRD3A1ANTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A1BX	-	VRD3A1BNNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A1BX	-	VRD3A1BNTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A1CX	-	VRD3A1CNNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A1CX	-	VRD3A1CNTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A1DX	-	VRD3A1DNNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A1DX	-	VRD3A1DNTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A1EX	-	VRD3A1ENNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A1EX	-	VRD3A1ENTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A1FX	-	VRD3A1FNNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A1FX	-	VRD3A1FNTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A1GX	-	VRD3A1GNNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A1GX	-	VRD3A1GNTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A1HX	-	VRD3A1HNNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A1HX	-	VRD3A1HNTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A1JX	-	VRD3A1JNNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A1JX	-	VRD3A1JNTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A1KX	-	VRD3A1KPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A1KX	-	VRD3A1KPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A20X	-	VRD3A20PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A20X	-	VRD3A20PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A21X	-	VRD3A21PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A21X	-	VRD3A21PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A22X	-	VRD3A22PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A22X	-	VRD3A22PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A23X	-	VRD3A23PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A23X	-	VRD3A23PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A24X	-	VRD3A24PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A24X	-	VRD3A24PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A25X	-	VRD3A25PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A25X	-	VRD3A25PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A26X	-	VRD3A26PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A26X	-	VRD3A26PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A27X	-	VRD3A27PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A27X	-	VRD3A27PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A28X	-	VRD3A28PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A28X	-	VRD3A28PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A29X	-	VRD3A29PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A29X	-	VRD3A29PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A2AX	-	VRD3A2APNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A2AX	-	VRD3A2APTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A2BX	-	VRD3A2BPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A2BX	-	VRD3A2BPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A2CX	-	VRD3A2CPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A2CX	-	VRD3A2CPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A2DX	-	VRD3A2DPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A2DX	-	VRD3A2DPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A2EX	-	VRD3A2EPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A2EX	-	VRD3A2EPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A2FX	-	VRD3A2FPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A2FX	-	VRD3A2FPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A2GX	-	VRD3A2GPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A2GX	-	VRD3A2GPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A2HX	-	VRD3A2HPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A2HX	-	VRD3A2HPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A2JX	-	VRD3A2JPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A2JX	-	VRD3A2JPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A2KX	-	VRD3A2KPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A2KX	-	VRD3A2KPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A30X	-	VRD3A30PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A30X	-	VRD3A30PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3A31X	-	VRD3A31PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A31X	-	VRD3A31PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A32X	-	VRD3A32PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A32X	-	VRD3A32PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A33X	-	VRD3A33PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A33X	-	VRD3A33PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A34X	-	VRD3A34PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A34X	-	VRD3A34PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A35X	-	VRD3A35PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A35X	-	VRD3A35PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A36X	-	VRD3A36PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A36X	-	VRD3A36PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A37X	-	VRD3A37PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A37X	-	VRD3A37PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A38X	-	VRD3A38PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A38X	-	VRD3A38PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A39X	-	VRD3A39PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A39X	-	VRD3A39PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A3AX	-	VRD3A3APNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A3AX	-	VRD3A3APTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A3BX	-	VRD3A3BPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A3BX	-	VRD3A3BPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A3CX	-	VRD3A3CPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A3CX	-	VRD3A3CPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A3DX	-	VRD3A3DPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A3DX	-	VRD3A3DPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A3EX	-	VRD3A3EPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A3EX	-	VRD3A3EPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A3FX	-	VRD3A3FPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A3FX	-	VRD3A3FPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A3GX	-	VRD3A3GPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A3GX	-	VRD3A3GPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A3HX	-	VRD3A3HPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A3HX	-	VRD3A3HPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A3JX	-	VRD3A3JPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A3JX	-	VRD3A3JPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A3KX	-	VRD3A3KPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A3KX	-	VRD3A3KPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A40X	-	VRD3A40PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A40X	-	VRD3A40PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A41X	-	VRD3A41PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A41X	-	VRD3A41PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A42X	-	VRD3A42PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A42X	-	VRD3A42PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A43X	-	VRD3A43PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A43X	-	VRD3A43PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A44X	-	VRD3A44PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A44X	-	VRD3A44PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A45X	-	VRD3A45PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A45X	-	VRD3A45PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A46X	-	VRD3A46PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A46X	-	VRD3A46PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A47X	-	VRD3A47PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A47X	-	VRD3A47PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A48X	-	VRD3A48PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A48X	-	VRD3A48PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A49X	-	VRD3A49PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A49X	-	VRD3A49PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A4AX	-	VRD3A4APNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A4AX	-	VRD3A4APTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A4BX	-	VRD3A4BPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A4BX	-	VRD3A4BPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A4CX	-	VRD3A4CPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A4CX	-	VRD3A4CPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A4DX	-	VRD3A4DPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A4DX	-	VRD3A4DPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A4EX	-	VRD3A4EPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A4EX	-	VRD3A4EPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A4FX	-	VRD3A4FPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A4FX	-	VRD3A4FPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3A4GX	-	VRD3A4GPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A4GX	-	VRD3A4GPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A4HX	-	VRD3A4HPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A4HX	-	VRD3A4HPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A4JX	-	VRD3A4JPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A4JX	-	VRD3A4JPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A4KX	-	VRD3A4KPNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A4KX	-	VRD3A4KPTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3A50X	-	VRD3A50PNX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3A50X	-	VRD3A50PTX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B08X	-	VRD3B08NNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B08X	-	VRD3B08NTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B09X	-	VRD3B09NNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B09X	-	VRD3B09NTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B0JX	-	VRD3B0JNNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B0JX	-	VRD3B0JNTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B0KX	-	VRD3B0KNNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B0KX	-	VRD3B0KNTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B10X	-	VRD3B10NNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B10X	-	VRD3B10NTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B11X	-	VRD3B11NNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B11X	-	VRD3B11NTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B12X	-	VRD3B12NNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B12X	-	VRD3B12NTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B13X	-	VRD3B13NNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B13X	-	VRD3B13NTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B14X	-	VRD3B14NNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B14X	-	VRD3B14NTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B15X	-	VRD3B15NNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B15X	-	VRD3B15NTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B16X	-	VRD3B16NNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B16X	-	VRD3B16NTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B17X	-	VRD3B17NNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B17X	-	VRD3B17NTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B18X	-	VRD3B18NNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B18X	-	VRD3B18NTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B19X	-	VRD3B19NNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B19X	-	VRD3B19NTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B1AX	-	VRD3B1ANNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B1AX	-	VRD3B1ANTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B1BX	-	VRD3B1BNNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B1BX	-	VRD3B1BNTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B1CX	-	VRD3B1CNNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B1CX	-	VRD3B1CNTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B1DX	-	VRD3B1DNNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B1DX	-	VRD3B1DNTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B1EX	-	VRD3B1ENNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B1EX	-	VRD3B1ENTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B1FX	-	VRD3B1FNNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B1FX	-	VRD3B1FNTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B1GX	-	VRD3B1GNNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B1GX	-	VRD3B1GNTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B1HX	-	VRD3B1HNNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B1HX	-	VRD3B1HNTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B1JX	-	VRD3B1JNNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B1JX	-	VRD3B1JNTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B1KX	-	VRD3B1KPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B1KX	-	VRD3B1KPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B20X	-	VRD3B20PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B20X	-	VRD3B20PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B21X	-	VRD3B21PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B21X	-	VRD3B21PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B22X	-	VRD3B22PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B22X	-	VRD3B22PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B23X	-	VRD3B23PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B23X	-	VRD3B23PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B24X	-	VRD3B24PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B24X	-	VRD3B24PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B25X	-	VRD3B25PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B25X	-	VRD3B25PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3B26X	-	VRD3B26PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B26X	-	VRD3B26PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B27X	-	VRD3B27PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B27X	-	VRD3B27PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B28X	-	VRD3B28PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B28X	-	VRD3B28PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B29X	-	VRD3B29PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B29X	-	VRD3B29PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B2AX	-	VRD3B2APNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B2AX	-	VRD3B2APTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B2BX	-	VRD3B2BPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B2BX	-	VRD3B2BPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B2CX	-	VRD3B2CPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B2CX	-	VRD3B2CPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B2DX	-	VRD3B2DPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B2DX	-	VRD3B2DPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B2EX	-	VRD3B2EPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B2EX	-	VRD3B2EPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B2FX	-	VRD3B2FPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B2FX	-	VRD3B2FPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B2GX	-	VRD3B2GPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B2GX	-	VRD3B2GPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B2HX	-	VRD3B2HPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B2HX	-	VRD3B2HPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B2JX	-	VRD3B2JPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B2JX	-	VRD3B2JPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B2KX	-	VRD3B2KPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B2KX	-	VRD3B2KPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B30X	-	VRD3B30PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B30X	-	VRD3B30PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B31X	-	VRD3B31PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B31X	-	VRD3B31PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B32X	-	VRD3B32PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B32X	-	VRD3B32PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B33X	-	VRD3B33PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B33X	-	VRD3B33PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B34X	-	VRD3B34PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B34X	-	VRD3B34PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B35X	-	VRD3B35PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B35X	-	VRD3B35PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B36X	-	VRD3B36PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B36X	-	VRD3B36PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B37X	-	VRD3B37PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B37X	-	VRD3B37PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B38X	-	VRD3B38PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B38X	-	VRD3B38PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B39X	-	VRD3B39PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B39X	-	VRD3B39PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B3AX	-	VRD3B3APNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B3AX	-	VRD3B3APTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B3BX	-	VRD3B3BPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B3BX	-	VRD3B3BPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B3CX	-	VRD3B3CPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B3CX	-	VRD3B3CPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B3DX	-	VRD3B3DPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B3DX	-	VRD3B3DPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B3EX	-	VRD3B3EPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B3EX	-	VRD3B3EPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B3FX	-	VRD3B3FPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B3FX	-	VRD3B3FPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B3GX	-	VRD3B3GPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B3GX	-	VRD3B3GPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B3HX	-	VRD3B3HPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B3HX	-	VRD3B3HPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B3JX	-	VRD3B3JPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B3JX	-	VRD3B3JPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B3KX	-	VRD3B3KPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B3KX	-	VRD3B3KPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B40X	-	VRD3B40PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B40X	-	VRD3B40PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3B41X	-	VRD3B41PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B41X	-	VRD3B41PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B42X	-	VRD3B42PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B42X	-	VRD3B42PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B43X	-	VRD3B43PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B43X	-	VRD3B43PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B44X	-	VRD3B44PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B44X	-	VRD3B44PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B45X	-	VRD3B45PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B45X	-	VRD3B45PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B46X	-	VRD3B46PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B46X	-	VRD3B46PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B47X	-	VRD3B47PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B47X	-	VRD3B47PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B48X	-	VRD3B48PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B48X	-	VRD3B48PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B49X	-	VRD3B49PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B49X	-	VRD3B49PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B4AX	-	VRD3B4APNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B4AX	-	VRD3B4APTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B4BX	-	VRD3B4BPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B4BX	-	VRD3B4BPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B4CX	-	VRD3B4CPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B4CX	-	VRD3B4CPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B4DX	-	VRD3B4DPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B4DX	-	VRD3B4DPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B4EX	-	VRD3B4EPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B4EX	-	VRD3B4EPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B4FX	-	VRD3B4FPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B4FX	-	VRD3B4FPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B4GX	-	VRD3B4GPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B4GX	-	VRD3B4GPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B4HX	-	VRD3B4HPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B4HX	-	VRD3B4HPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B4JX	-	VRD3B4JPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B4JX	-	VRD3B4JPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B4KX	-	VRD3B4KPNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B4KX	-	VRD3B4KPTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3B50X	-	VRD3B50PNX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3B50X	-	VRD3B50PTX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C08X	-	VRD3C08NNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C08X	-	VRD3C08NTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C09X	-	VRD3C09NNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C09X	-	VRD3C09NTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C0JX	-	VRD3C0JNNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C0JX	-	VRD3C0JNTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C0KX	-	VRD3C0KNNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C0KX	-	VRD3C0KNTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C10X	-	VRD3C10NNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C10X	-	VRD3C10NTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C11X	-	VRD3C11NNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C11X	-	VRD3C11NTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C12X	-	VRD3C12NNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C12X	-	VRD3C12NTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C13X	-	VRD3C13NNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C13X	-	VRD3C13NTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C14X	-	VRD3C14NNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C14X	-	VRD3C14NTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C15X	-	VRD3C15NNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C15X	-	VRD3C15NTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C16X	-	VRD3C16NNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C16X	-	VRD3C16NTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C17X	-	VRD3C17NNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C17X	-	VRD3C17NTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C18X	-	VRD3C18NNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C18X	-	VRD3C18NTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C19X	-	VRD3C19NNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C19X	-	VRD3C19NTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C1AX	-	VRD3C1ANNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C1AX	-	VRD3C1ANTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3C1BX	-	VRD3C1BNNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C1BX	-	VRD3C1BNTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C1CX	-	VRD3C1CNNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C1CX	-	VRD3C1CNTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C1DX	-	VRD3C1DNNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C1DX	-	VRD3C1DNTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C1EX	-	VRD3C1ENNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C1EX	-	VRD3C1ENTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C1FX	-	VRD3C1FNNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C1FX	-	VRD3C1FNTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C1GX	-	VRD3C1GNNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C1GX	-	VRD3C1GNTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C1HX	-	VRD3C1HNNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C1HX	-	VRD3C1HNTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C1JX	-	VRD3C1JNNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C1JX	-	VRD3C1JNTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C1KX	-	VRD3C1KPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C1KX	-	VRD3C1KPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C20X	-	VRD3C20PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C20X	-	VRD3C20PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C21X	-	VRD3C21PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C21X	-	VRD3C21PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C22X	-	VRD3C22PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C22X	-	VRD3C22PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C23X	-	VRD3C23PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C23X	-	VRD3C23PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C24X	-	VRD3C24PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C24X	-	VRD3C24PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C25X	-	VRD3C25PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C25X	-	VRD3C25PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C26X	-	VRD3C26PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C26X	-	VRD3C26PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C27X	-	VRD3C27PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C27X	-	VRD3C27PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C28X	-	VRD3C28PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C28X	-	VRD3C28PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C29X	-	VRD3C29PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C29X	-	VRD3C29PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C2AX	-	VRD3C2APNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C2AX	-	VRD3C2APTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C2BX	-	VRD3C2BPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C2BX	-	VRD3C2BPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C2CX	-	VRD3C2CPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C2CX	-	VRD3C2CPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C2DX	-	VRD3C2DPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C2DX	-	VRD3C2DPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C2EX	-	VRD3C2EPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C2EX	-	VRD3C2EPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C2FX	-	VRD3C2FPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C2FX	-	VRD3C2FPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C2GX	-	VRD3C2GPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C2GX	-	VRD3C2GPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C2HX	-	VRD3C2HPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C2HX	-	VRD3C2HPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C2JX	-	VRD3C2JPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C2JX	-	VRD3C2JPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C2KX	-	VRD3C2KPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C2KX	-	VRD3C2KPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C30X	-	VRD3C30PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C30X	-	VRD3C30PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C31X	-	VRD3C31PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C31X	-	VRD3C31PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C32X	-	VRD3C32PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C32X	-	VRD3C32PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C33X	-	VRD3C33PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C33X	-	VRD3C33PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C34X	-	VRD3C34PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C34X	-	VRD3C34PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C35X	-	VRD3C35PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C35X	-	VRD3C35PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3C36X	-	VRD3C36PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C36X	-	VRD3C36PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C37X	-	VRD3C37PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C37X	-	VRD3C37PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C38X	-	VRD3C38PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C38X	-	VRD3C38PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C39X	-	VRD3C39PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C39X	-	VRD3C39PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C3AX	-	VRD3C3APNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C3AX	-	VRD3C3APTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C3BX	-	VRD3C3BPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C3BX	-	VRD3C3BPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C3CX	-	VRD3C3CPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C3CX	-	VRD3C3CPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C3DX	-	VRD3C3DPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C3DX	-	VRD3C3DPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C3EX	-	VRD3C3EPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C3EX	-	VRD3C3EPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C3FX	-	VRD3C3FPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C3FX	-	VRD3C3FPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C3GX	-	VRD3C3GPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C3GX	-	VRD3C3GPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C3HX	-	VRD3C3HPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C3HX	-	VRD3C3HPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C3JX	-	VRD3C3JPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C3JX	-	VRD3C3JPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C3KX	-	VRD3C3KPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C3KX	-	VRD3C3KPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C40X	-	VRD3C40PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C40X	-	VRD3C40PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C41X	-	VRD3C41PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C41X	-	VRD3C41PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C42X	-	VRD3C42PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C42X	-	VRD3C42PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C43X	-	VRD3C43PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C43X	-	VRD3C43PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C44X	-	VRD3C44PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C44X	-	VRD3C44PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C45X	-	VRD3C45PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C45X	-	VRD3C45PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C46X	-	VRD3C46PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C46X	-	VRD3C46PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C47X	-	VRD3C47PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C47X	-	VRD3C47PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C48X	-	VRD3C48PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C48X	-	VRD3C48PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C49X	-	VRD3C49PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C49X	-	VRD3C49PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C4AX	-	VRD3C4APNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C4AX	-	VRD3C4APTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C4BX	-	VRD3C4BPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C4BX	-	VRD3C4BPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C4CX	-	VRD3C4CPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C4CX	-	VRD3C4CPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C4DX	-	VRD3C4DPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C4DX	-	VRD3C4DPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C4EX	-	VRD3C4EPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C4EX	-	VRD3C4EPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C4FX	-	VRD3C4FPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C4FX	-	VRD3C4FPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C4GX	-	VRD3C4GPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C4GX	-	VRD3C4GPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C4HX	-	VRD3C4HPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C4HX	-	VRD3C4HPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C4JX	-	VRD3C4JPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C4JX	-	VRD3C4JPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C4KX	-	VRD3C4KPNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C4KX	-	VRD3C4KPTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3C50X	-	VRD3C50PNX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3C50X	-	VRD3C50PTX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3D08X	-	VRD3D08NNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D08X	-	VRD3D08NTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D09X	-	VRD3D09NNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D09X	-	VRD3D09NTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D0JX	-	VRD3D0JNNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D0JX	-	VRD3D0JNTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D0KX	-	VRD3D0KNNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D0KX	-	VRD3D0KNTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D10X	-	VRD3D10NNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D10X	-	VRD3D10NTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D11X	-	VRD3D11NNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D11X	-	VRD3D11NTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D12X	-	VRD3D12NNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D12X	-	VRD3D12NTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D13X	-	VRD3D13NNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D13X	-	VRD3D13NTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D14X	-	VRD3D14NNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D14X	-	VRD3D14NTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D16X	-	VRD3D16NNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D16X	-	VRD3D16NTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D17X	-	VRD3D17NNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D17X	-	VRD3D17NTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D18X	-	VRD3D18NNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D18X	-	VRD3D18NTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D19X	-	VRD3D19NNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D19X	-	VRD3D19NTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D1AX	-	VRD3D1ANNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D1AX	-	VRD3D1ANTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D1BX	-	VRD3D1BNNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D1BX	-	VRD3D1BNTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D1CX	-	VRD3D1CNNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D1CX	-	VRD3D1CNTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D1DX	-	VRD3D1DNNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D1DX	-	VRD3D1DNTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D1GX	-	VRD3D1GNNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D1GX	-	VRD3D1GNTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D1HX	-	VRD3D1HNNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D1HX	-	VRD3D1HNTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D1JX	-	VRD3D1JNNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D1JX	-	VRD3D1JNTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D1KX	-	VRD3D1KPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D1KX	-	VRD3D1KPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D20X	-	VRD3D20PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D20X	-	VRD3D20PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D21X	-	VRD3D21PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D21X	-	VRD3D21PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D22X	-	VRD3D22PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D22X	-	VRD3D22PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D23X	-	VRD3D23PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D23X	-	VRD3D23PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D24X	-	VRD3D24PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D24X	-	VRD3D24PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D25X	-	VRD3D25PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D25X	-	VRD3D25PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D26X	-	VRD3D26PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D26X	-	VRD3D26PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D27X	-	VRD3D27PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D27X	-	VRD3D27PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D28X	-	VRD3D28PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D28X	-	VRD3D28PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D29X	-	VRD3D29PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D29X	-	VRD3D29PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D2AX	-	VRD3D2APNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D2AX	-	VRD3D2APTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D2BX	-	VRD3D2BPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D2BX	-	VRD3D2BPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D2CX	-	VRD3D2CPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D2CX	-	VRD3D2CPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D2DX	-	VRD3D2DPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D2DX	-	VRD3D2DPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3D2EX	-	VRD3D2EPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D2EX	-	VRD3D2EPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D2FX	-	VRD3D2FPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D2FX	-	VRD3D2FPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D2GX	-	VRD3D2GPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D2GX	-	VRD3D2GPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D2HX	-	VRD3D2HPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D2HX	-	VRD3D2HPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D2JX	-	VRD3D2JPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D2JX	-	VRD3D2JPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D2KX	-	VRD3D2KPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D2KX	-	VRD3D2KPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D30X	-	VRD3D30PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D30X	-	VRD3D30PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D31X	-	VRD3D31PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D31X	-	VRD3D31PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D32X	-	VRD3D32PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D32X	-	VRD3D32PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D33X	-	VRD3D33PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D33X	-	VRD3D33PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D34X	-	VRD3D34PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D34X	-	VRD3D34PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D35X	-	VRD3D35PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D35X	-	VRD3D35PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D36X	-	VRD3D36PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D36X	-	VRD3D36PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D37X	-	VRD3D37PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D37X	-	VRD3D37PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D38X	-	VRD3D38PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D38X	-	VRD3D38PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D39X	-	VRD3D39PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D39X	-	VRD3D39PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D3AX	-	VRD3D3APNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D3AX	-	VRD3D3APTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D3BX	-	VRD3D3BPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D3BX	-	VRD3D3BPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D3CX	-	VRD3D3CPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D3CX	-	VRD3D3CPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D3DX	-	VRD3D3DPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D3DX	-	VRD3D3DPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D3EX	-	VRD3D3EPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D3EX	-	VRD3D3EPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D3FX	-	VRD3D3FPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D3FX	-	VRD3D3FPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D3GX	-	VRD3D3GPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D3GX	-	VRD3D3GPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D3HX	-	VRD3D3HPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D3HX	-	VRD3D3HPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D3JX	-	VRD3D3JPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D3JX	-	VRD3D3JPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D3KX	-	VRD3D3KPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D3KX	-	VRD3D3KPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D40X	-	VRD3D40PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D40X	-	VRD3D40PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D41X	-	VRD3D41PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D41X	-	VRD3D41PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D42X	-	VRD3D42PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D42X	-	VRD3D42PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D43X	-	VRD3D43PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D43X	-	VRD3D43PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D44X	-	VRD3D44PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D44X	-	VRD3D44PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D45X	-	VRD3D45PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D45X	-	VRD3D45PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D46X	-	VRD3D46PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D46X	-	VRD3D46PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D47X	-	VRD3D47PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D47X	-	VRD3D47PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D48X	-	VRD3D48PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D48X	-	VRD3D48PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3D49X	-	VRD3D49PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D49X	-	VRD3D49PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D4AX	-	VRD3D4APNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D4AX	-	VRD3D4APTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D4BX	-	VRD3D4BPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D4BX	-	VRD3D4BPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D4CX	-	VRD3D4CPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D4CX	-	VRD3D4CPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D4DX	-	VRD3D4DPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D4DX	-	VRD3D4DPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D4EX	-	VRD3D4EPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D4EX	-	VRD3D4EPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D4FX	-	VRD3D4FPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D4FX	-	VRD3D4FPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D4GX	-	VRD3D4GPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D4GX	-	VRD3D4GPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D4HX	-	VRD3D4HPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D4HX	-	VRD3D4HPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D4JX	-	VRD3D4JPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D4JX	-	VRD3D4JPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D4KX	-	VRD3D4KPNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D4KX	-	VRD3D4KPTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D50X	-	VRD3D50PNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D50X	-	VRD3D50PTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3D5X	-	VRD3D15NNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3D5X	-	VRD3D15NTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3DEX	-	VRD3D1ENNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3DEX	-	VRD3D1ENTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3DFX	-	VRD3D1FNNX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3DFX	-	VRD3D1FNTX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E08X	-	VRD3E08NNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E08X	-	VRD3E08NTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E09X	-	VRD3E09NNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E09X	-	VRD3E09NTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E0JX	-	VRD3E0JNNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E0JX	-	VRD3E0JNTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E0KX	-	VRD3E0KNNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E0KX	-	VRD3E0KNTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E10X	-	VRD3E10NNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E10X	-	VRD3E10NTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E11X	-	VRD3E11NNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E11X	-	VRD3E11NTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E12X	-	VRD3E12NNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E12X	-	VRD3E12NTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E13X	-	VRD3E13NNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E13X	-	VRD3E13NTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E14X	-	VRD3E14NNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E14X	-	VRD3E14NTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E15X	-	VRD3E15NNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E15X	-	VRD3E15NTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E16X	-	VRD3E16NNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E16X	-	VRD3E16NTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E17X	-	VRD3E17NNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E17X	-	VRD3E17NTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E18X	-	VRD3E18NNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E18X	-	VRD3E18NTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E19X	-	VRD3E19NNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E19X	-	VRD3E19NTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E1AX	-	VRD3E1ANNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E1AX	-	VRD3E1ANTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E1BX	-	VRD3E1BNNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E1BX	-	VRD3E1BNTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E1CX	-	VRD3E1CNNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E1CX	-	VRD3E1CNTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E1DX	-	VRD3E1DNNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E1DX	-	VRD3E1DNTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E1EX	-	VRD3E1ENNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E1EX	-	VRD3E1ENTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E1FX	-	VRD3E1FNNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E1FX	-	VRD3E1FNTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3E1GX	-	VRD3E1GNNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E1GX	-	VRD3E1GNTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E1HX	-	VRD3E1HNNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E1HX	-	VRD3E1HNTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E1JX	-	VRD3E1JNNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E1JX	-	VRD3E1JNTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E1KX	-	VRD3E1KPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E1KX	-	VRD3E1KPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E20X	-	VRD3E20PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E20X	-	VRD3E20PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E21X	-	VRD3E21PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E21X	-	VRD3E21PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E22X	-	VRD3E22PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E22X	-	VRD3E22PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E23X	-	VRD3E23PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E23X	-	VRD3E23PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E24X	-	VRD3E24PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E24X	-	VRD3E24PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E25X	-	VRD3E25PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E25X	-	VRD3E25PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E26X	-	VRD3E26PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E26X	-	VRD3E26PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E27X	-	VRD3E27PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E27X	-	VRD3E27PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E28X	-	VRD3E28PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E28X	-	VRD3E28PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E29X	-	VRD3E29PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E29X	-	VRD3E29PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E2AX	-	VRD3E2APNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E2AX	-	VRD3E2APTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E2BX	-	VRD3E2BPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E2BX	-	VRD3E2BPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E2CX	-	VRD3E2CPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E2CX	-	VRD3E2CPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E2DX	-	VRD3E2DPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E2DX	-	VRD3E2DPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E2EX	-	VRD3E2EPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E2EX	-	VRD3E2EPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E2FX	-	VRD3E2FPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E2FX	-	VRD3E2FPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E2GX	-	VRD3E2GPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E2GX	-	VRD3E2GPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E2HX	-	VRD3E2HPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E2HX	-	VRD3E2HPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E2JX	-	VRD3E2JPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E2JX	-	VRD3E2JPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E2KX	-	VRD3E2KPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E2KX	-	VRD3E2KPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E30X	-	VRD3E30PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E30X	-	VRD3E30PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E31X	-	VRD3E31PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E31X	-	VRD3E31PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E32X	-	VRD3E32PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E32X	-	VRD3E32PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E33X	-	VRD3E33PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E33X	-	VRD3E33PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E34X	-	VRD3E34PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E34X	-	VRD3E34PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E35X	-	VRD3E35PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E35X	-	VRD3E35PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E36X	-	VRD3E36PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E36X	-	VRD3E36PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E37X	-	VRD3E37PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E37X	-	VRD3E37PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E38X	-	VRD3E38PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E38X	-	VRD3E38PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E39X	-	VRD3E39PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E39X	-	VRD3E39PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E3AX	-	VRD3E3APNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E3AX	-	VRD3E3APTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3E3BX	-	VRD3E3BPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E3BX	-	VRD3E3BPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E3CX	-	VRD3E3CPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E3CX	-	VRD3E3CPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E3DX	-	VRD3E3DPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E3DX	-	VRD3E3DPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E3EX	-	VRD3E3EPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E3EX	-	VRD3E3EPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E3FX	-	VRD3E3FPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E3FX	-	VRD3E3FPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E3GX	-	VRD3E3GPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E3GX	-	VRD3E3GPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E3HX	-	VRD3E3HPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E3HX	-	VRD3E3HPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E3JX	-	VRD3E3JPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E3JX	-	VRD3E3JPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E3KX	-	VRD3E3KPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E3KX	-	VRD3E3KPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E40X	-	VRD3E40PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E40X	-	VRD3E40PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E41X	-	VRD3E41PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E41X	-	VRD3E41PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E42X	-	VRD3E42PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E42X	-	VRD3E42PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E43X	-	VRD3E43PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E43X	-	VRD3E43PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E44X	-	VRD3E44PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E44X	-	VRD3E44PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E45X	-	VRD3E45PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E45X	-	VRD3E45PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E46X	-	VRD3E46PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E46X	-	VRD3E46PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E47X	-	VRD3E47PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E47X	-	VRD3E47PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E48X	-	VRD3E48PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E48X	-	VRD3E48PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E49X	-	VRD3E49PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E49X	-	VRD3E49PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E4AX	-	VRD3E4APNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E4AX	-	VRD3E4APTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E4BX	-	VRD3E4BPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E4BX	-	VRD3E4BPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E4CX	-	VRD3E4CPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E4CX	-	VRD3E4CPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E4DX	-	VRD3E4DPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E4DX	-	VRD3E4DPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E4EX	-	VRD3E4EPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E4EX	-	VRD3E4EPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E4FX	-	VRD3E4FPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E4FX	-	VRD3E4FPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E4GX	-	VRD3E4GPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E4GX	-	VRD3E4GPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E4HX	-	VRD3E4HPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E4HX	-	VRD3E4HPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E4JX	-	VRD3E4JPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E4JX	-	VRD3E4JPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E4KX	-	VRD3E4KPNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E4KX	-	VRD3E4KPTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3E50X	-	VRD3E50PNX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3E50X	-	VRD3E50PTX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F08X	-	VRD3F08NNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F08X	-	VRD3F08NTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F09X	-	VRD3F09NNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F09X	-	VRD3F09NTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F0JX	-	VRD3F0JNNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F0JX	-	VRD3F0JNTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F0KX	-	VRD3F0KNNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F0KX	-	VRD3F0KNTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F10X	-	VRD3F10NNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F10X	-	VRD3F10NTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3F11X	-	VRD3F11NNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F11X	-	VRD3F11NTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F12X	-	VRD3F12NNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F12X	-	VRD3F12NTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F13X	-	VRD3F13NNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F13X	-	VRD3F13NTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F14X	-	VRD3F14NNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F14X	-	VRD3F14NTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F15X	-	VRD3F15NNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F15X	-	VRD3F15NTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F16X	-	VRD3F16NNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F16X	-	VRD3F16NTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F17X	-	VRD3F17NNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F17X	-	VRD3F17NTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F18X	-	VRD3F18NNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F18X	-	VRD3F18NTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F19X	-	VRD3F19NNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F19X	-	VRD3F19NTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F1AX	-	VRD3F1ANNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F1AX	-	VRD3F1ANTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F1BX	-	VRD3F1BNNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F1BX	-	VRD3F1BNTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F1CX	-	VRD3F1CNNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F1CX	-	VRD3F1CNTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F1DX	-	VRD3F1DNNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F1DX	-	VRD3F1DNTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F1EX	-	VRD3F1ENNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F1EX	-	VRD3F1ENTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F1FX	-	VRD3F1FNNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F1FX	-	VRD3F1FNTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F1GX	-	VRD3F1GNNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F1GX	-	VRD3F1GNTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F1HX	-	VRD3F1HNNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F1HX	-	VRD3F1HNTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F1JX	-	VRD3F1JNNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F1JX	-	VRD3F1JNTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F1KX	-	VRD3F1KPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F1KX	-	VRD3F1KPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F20X	-	VRD3F20PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F20X	-	VRD3F20PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F21X	-	VRD3F21PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F21X	-	VRD3F21PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F22X	-	VRD3F22PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F22X	-	VRD3F22PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F23X	-	VRD3F23PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F23X	-	VRD3F23PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F24X	-	VRD3F24PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F24X	-	VRD3F24PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F25X	-	VRD3F25PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F25X	-	VRD3F25PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F26X	-	VRD3F26PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F26X	-	VRD3F26PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F27X	-	VRD3F27PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F27X	-	VRD3F27PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F28X	-	VRD3F28PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F28X	-	VRD3F28PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F29X	-	VRD3F29PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F29X	-	VRD3F29PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F2AX	-	VRD3F2APNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F2AX	-	VRD3F2APTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F2BX	-	VRD3F2BPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F2BX	-	VRD3F2BPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F2CX	-	VRD3F2CPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F2CX	-	VRD3F2CPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F2DX	-	VRD3F2DPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F2DX	-	VRD3F2DPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F2EX	-	VRD3F2EPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F2EX	-	VRD3F2EPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F2FX	-	VRD3F2FPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F2FX	-	VRD3F2FPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3F2GX	-	VRD3F2GPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F2GX	-	VRD3F2GPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F2HX	-	VRD3F2HPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F2HX	-	VRD3F2HPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F2JX	-	VRD3F2JPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F2JX	-	VRD3F2JPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F2KX	-	VRD3F2KPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F2KX	-	VRD3F2KPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F30X	-	VRD3F30PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F30X	-	VRD3F30PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F31X	-	VRD3F31PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F31X	-	VRD3F31PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F32X	-	VRD3F32PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F32X	-	VRD3F32PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F33X	-	VRD3F33PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F33X	-	VRD3F33PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F34X	-	VRD3F34PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F34X	-	VRD3F34PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F35X	-	VRD3F35PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F35X	-	VRD3F35PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F36X	-	VRD3F36PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F36X	-	VRD3F36PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F37X	-	VRD3F37PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F37X	-	VRD3F37PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F38X	-	VRD3F38PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F38X	-	VRD3F38PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F39X	-	VRD3F39PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F39X	-	VRD3F39PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F3AX	-	VRD3F3APNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F3AX	-	VRD3F3APTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F3BX	-	VRD3F3BPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F3BX	-	VRD3F3BPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F3CX	-	VRD3F3CPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F3CX	-	VRD3F3CPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F3DX	-	VRD3F3DPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F3DX	-	VRD3F3DPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F3EX	-	VRD3F3EPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F3EX	-	VRD3F3EPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F3FX	-	VRD3F3FPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F3FX	-	VRD3F3FPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F3GX	-	VRD3F3GPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F3GX	-	VRD3F3GPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F3HX	-	VRD3F3HPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F3HX	-	VRD3F3HPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F3JX	-	VRD3F3JPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F3JX	-	VRD3F3JPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F3KX	-	VRD3F3KPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F3KX	-	VRD3F3KPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F40X	-	VRD3F40PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F40X	-	VRD3F40PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F41X	-	VRD3F41PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F41X	-	VRD3F41PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F42X	-	VRD3F42PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F42X	-	VRD3F42PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F43X	-	VRD3F43PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F43X	-	VRD3F43PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F44X	-	VRD3F44PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F44X	-	VRD3F44PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F45X	-	VRD3F45PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F45X	-	VRD3F45PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F46X	-	VRD3F46PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F46X	-	VRD3F46PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F47X	-	VRD3F47PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F47X	-	VRD3F47PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F48X	-	VRD3F48PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F48X	-	VRD3F48PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F49X	-	VRD3F49PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F49X	-	VRD3F49PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F4AX	-	VRD3F4APNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F4AX	-	VRD3F4APTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3F4BX	-	VRD3F4BPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F4BX	-	VRD3F4BPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F4CX	-	VRD3F4CPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F4CX	-	VRD3F4CPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F4DX	-	VRD3F4DPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F4DX	-	VRD3F4DPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F4EX	-	VRD3F4EPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F4EX	-	VRD3F4EPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F4FX	-	VRD3F4FPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F4FX	-	VRD3F4FPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F4GX	-	VRD3F4GPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F4GX	-	VRD3F4GPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F4HX	-	VRD3F4HPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F4HX	-	VRD3F4HPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F4JX	-	VRD3F4JPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F4JX	-	VRD3F4JPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F4KX	-	VRD3F4KPNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F4KX	-	VRD3F4KPTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3F50X	-	VRD3F50PNX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3F50X	-	VRD3F50PTX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G08X	-	VRD3G08NNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G08X	-	VRD3G08NTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G09X	-	VRD3G09NNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G09X	-	VRD3G09NTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G0JX	-	VRD3G0JNNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G0JX	-	VRD3G0JNTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G0KX	-	VRD3G0KNNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G0KX	-	VRD3G0KNTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G10X	-	VRD3G10NNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G10X	-	VRD3G10NTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G11X	-	VRD3G11NNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G11X	-	VRD3G11NTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G12X	-	VRD3G12NNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G12X	-	VRD3G12NTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G13X	-	VRD3G13NNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G13X	-	VRD3G13NTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G14X	-	VRD3G14NNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G14X	-	VRD3G14NTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G15X	-	VRD3G15NNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G15X	-	VRD3G15NTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G16X	-	VRD3G16NNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G16X	-	VRD3G16NTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G17X	-	VRD3G17NNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G17X	-	VRD3G17NTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G18X	-	VRD3G18NNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G18X	-	VRD3G18NTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G19X	-	VRD3G19NNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G19X	-	VRD3G19NTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G1AX	-	VRD3G1ANNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G1AX	-	VRD3G1ANTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G1BX	-	VRD3G1BNNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G1BX	-	VRD3G1BNTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G1CX	-	VRD3G1CNNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G1CX	-	VRD3G1CNTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G1DX	-	VRD3G1DNNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G1DX	-	VRD3G1DNTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G1EX	-	VRD3G1ENNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G1EX	-	VRD3G1ENTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G1FX	-	VRD3G1FNNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G1FX	-	VRD3G1FNTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G1GX	-	VRD3G1GNNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G1GX	-	VRD3G1GNTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G1HX	-	VRD3G1HNNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G1HX	-	VRD3G1HNTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G1JX	-	VRD3G1JNNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G1JX	-	VRD3G1JNTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G1KX	-	VRD3G1KPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G1KX	-	VRD3G1KPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G20X	-	VRD3G20PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G20X	-	VRD3G20PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3G21X	-	VRD3G21PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G21X	-	VRD3G21PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G22X	-	VRD3G22PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G22X	-	VRD3G22PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G23X	-	VRD3G23PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G23X	-	VRD3G23PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G24X	-	VRD3G24PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G24X	-	VRD3G24PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G25X	-	VRD3G25PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G25X	-	VRD3G25PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G26X	-	VRD3G26PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G26X	-	VRD3G26PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G27X	-	VRD3G27PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G27X	-	VRD3G27PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G28X	-	VRD3G28PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G28X	-	VRD3G28PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G29X	-	VRD3G29PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G29X	-	VRD3G29PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G2AX	-	VRD3G2APNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G2AX	-	VRD3G2APTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G2BX	-	VRD3G2BPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G2BX	-	VRD3G2BPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G2CX	-	VRD3G2CPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G2CX	-	VRD3G2CPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G2DX	-	VRD3G2DPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G2DX	-	VRD3G2DPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G2EX	-	VRD3G2EPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G2EX	-	VRD3G2EPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G2FX	-	VRD3G2FPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G2FX	-	VRD3G2FPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G2GX	-	VRD3G2GPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G2GX	-	VRD3G2GPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G2HX	-	VRD3G2HPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G2HX	-	VRD3G2HPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G2JX	-	VRD3G2JPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G2JX	-	VRD3G2JPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G2KX	-	VRD3G2KPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G2KX	-	VRD3G2KPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G30X	-	VRD3G30PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G30X	-	VRD3G30PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G31X	-	VRD3G31PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G31X	-	VRD3G31PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G32X	-	VRD3G32PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G32X	-	VRD3G32PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G33X	-	VRD3G33PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G33X	-	VRD3G33PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G34X	-	VRD3G34PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G34X	-	VRD3G34PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G35X	-	VRD3G35PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G35X	-	VRD3G35PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G36X	-	VRD3G36PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G36X	-	VRD3G36PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G37X	-	VRD3G37PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G37X	-	VRD3G37PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G38X	-	VRD3G38PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G38X	-	VRD3G38PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G39X	-	VRD3G39PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G39X	-	VRD3G39PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G3AX	-	VRD3G3APNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G3AX	-	VRD3G3APTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G3BX	-	VRD3G3BPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G3BX	-	VRD3G3BPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G3CX	-	VRD3G3CPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G3CX	-	VRD3G3CPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G3DX	-	VRD3G3DPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G3DX	-	VRD3G3DPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G3EX	-	VRD3G3EPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G3EX	-	VRD3G3EPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G3FX	-	VRD3G3FPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G3FX	-	VRD3G3FPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3G3GX	-	VRD3G3GPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G3GX	-	VRD3G3GPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G3HX	-	VRD3G3HPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G3HX	-	VRD3G3HPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G3JX	-	VRD3G3JPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G3JX	-	VRD3G3JPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G3KX	-	VRD3G3KPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G3KX	-	VRD3G3KPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G40X	-	VRD3G40PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G40X	-	VRD3G40PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G41X	-	VRD3G41PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G41X	-	VRD3G41PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G42X	-	VRD3G42PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G42X	-	VRD3G42PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G43X	-	VRD3G43PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G43X	-	VRD3G43PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G44X	-	VRD3G44PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G44X	-	VRD3G44PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G45X	-	VRD3G45PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G45X	-	VRD3G45PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G46X	-	VRD3G46PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G46X	-	VRD3G46PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G47X	-	VRD3G47PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G47X	-	VRD3G47PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G48X	-	VRD3G48PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G48X	-	VRD3G48PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G49X	-	VRD3G49PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G49X	-	VRD3G49PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G4AX	-	VRD3G4APNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G4AX	-	VRD3G4APTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G4BX	-	VRD3G4BPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G4BX	-	VRD3G4BPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G4CX	-	VRD3G4CPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G4CX	-	VRD3G4CPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G4DX	-	VRD3G4DPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G4DX	-	VRD3G4DPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G4EX	-	VRD3G4EPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G4EX	-	VRD3G4EPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G4FX	-	VRD3G4FPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G4FX	-	VRD3G4FPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G4GX	-	VRD3G4GPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G4GX	-	VRD3G4GPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G4HX	-	VRD3G4HPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G4HX	-	VRD3G4HPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G4JX	-	VRD3G4JPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G4JX	-	VRD3G4JPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G4KX	-	VRD3G4KPNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G4KX	-	VRD3G4KPTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3G50X	-	VRD3G50PNX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3G50X	-	VRD3G50PTX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H08X	-	VRD3H08NNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H08X	-	VRD3H08NTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H09X	-	VRD3H09NNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H09X	-	VRD3H09NTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H0JX	-	VRD3H0JNNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H0JX	-	VRD3H0JNTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H0KX	-	VRD3H0KNNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H0KX	-	VRD3H0KNTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H10X	-	VRD3H10NNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H10X	-	VRD3H10NTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H11X	-	VRD3H11NNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H11X	-	VRD3H11NTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H12X	-	VRD3H12NNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H12X	-	VRD3H12NTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H13X	-	VRD3H13NNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H13X	-	VRD3H13NTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H14X	-	VRD3H14NNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H14X	-	VRD3H14NTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H15X	-	VRD3H15NNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H15X	-	VRD3H15NTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3H16X	-	VRD3H16NNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H16X	-	VRD3H16NTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H17X	-	VRD3H17NNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H17X	-	VRD3H17NTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H18X	-	VRD3H18NNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H18X	-	VRD3H18NTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H19X	-	VRD3H19NNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H19X	-	VRD3H19NTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H1AX	-	VRD3H1ANNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H1AX	-	VRD3H1ANTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H1BX	-	VRD3H1BNNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H1BX	-	VRD3H1BNTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H1CX	-	VRD3H1CNNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H1CX	-	VRD3H1CNTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H1DX	-	VRD3H1DNNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H1DX	-	VRD3H1DNTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H1EX	-	VRD3H1ENNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H1EX	-	VRD3H1ENTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H1FX	-	VRD3H1FNNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H1FX	-	VRD3H1FNTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H1GX	-	VRD3H1GNNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H1GX	-	VRD3H1GNTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H1HX	-	VRD3H1HNNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H1HX	-	VRD3H1HNTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H1JX	-	VRD3H1JNNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H1JX	-	VRD3H1JNTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H1KX	-	VRD3H1KPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H1KX	-	VRD3H1KPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H20X	-	VRD3H20PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H20X	-	VRD3H20PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H21X	-	VRD3H21PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H21X	-	VRD3H21PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H22X	-	VRD3H22PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H22X	-	VRD3H22PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H23X	-	VRD3H23PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H23X	-	VRD3H23PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H24X	-	VRD3H24PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H24X	-	VRD3H24PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H25X	-	VRD3H25PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H25X	-	VRD3H25PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H26X	-	VRD3H26PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H26X	-	VRD3H26PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H27X	-	VRD3H27PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H27X	-	VRD3H27PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H28X	-	VRD3H28PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H28X	-	VRD3H28PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H29X	-	VRD3H29PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H29X	-	VRD3H29PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H2AX	-	VRD3H2APNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H2AX	-	VRD3H2APTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H2BX	-	VRD3H2BPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H2BX	-	VRD3H2BPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H2CX	-	VRD3H2CPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H2CX	-	VRD3H2CPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H2DX	-	VRD3H2DPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H2DX	-	VRD3H2DPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H2EX	-	VRD3H2EPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H2EX	-	VRD3H2EPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H2FX	-	VRD3H2FPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H2FX	-	VRD3H2FPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H2GX	-	VRD3H2GPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H2GX	-	VRD3H2GPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H2HX	-	VRD3H2HPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H2HX	-	VRD3H2HPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H2JX	-	VRD3H2JPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H2JX	-	VRD3H2JPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H2KX	-	VRD3H2KPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H2KX	-	VRD3H2KPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H30X	-	VRD3H30PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H30X	-	VRD3H30PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3H31X	-	VRD3H31PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H31X	-	VRD3H31PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H32X	-	VRD3H32PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H32X	-	VRD3H32PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H33X	-	VRD3H33PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H33X	-	VRD3H33PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H34X	-	VRD3H34PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H34X	-	VRD3H34PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H35X	-	VRD3H35PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H35X	-	VRD3H35PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H36X	-	VRD3H36PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H36X	-	VRD3H36PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H37X	-	VRD3H37PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H37X	-	VRD3H37PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H38X	-	VRD3H38PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H38X	-	VRD3H38PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H39X	-	VRD3H39PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H39X	-	VRD3H39PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H3AX	-	VRD3H3APNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H3AX	-	VRD3H3APTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H3BX	-	VRD3H3BPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H3BX	-	VRD3H3BPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H3CX	-	VRD3H3CPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H3CX	-	VRD3H3CPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H3DX	-	VRD3H3DPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H3DX	-	VRD3H3DPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H3EX	-	VRD3H3EPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H3EX	-	VRD3H3EPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H3FX	-	VRD3H3FPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H3FX	-	VRD3H3FPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H3GX	-	VRD3H3GPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H3GX	-	VRD3H3GPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H3HX	-	VRD3H3HPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H3HX	-	VRD3H3HPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H3JX	-	VRD3H3JPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H3JX	-	VRD3H3JPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H3KX	-	VRD3H3KPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H3KX	-	VRD3H3KPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H40X	-	VRD3H40PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H40X	-	VRD3H40PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H41X	-	VRD3H41PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H41X	-	VRD3H41PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H42X	-	VRD3H42PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H42X	-	VRD3H42PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H43X	-	VRD3H43PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H43X	-	VRD3H43PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H44X	-	VRD3H44PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H44X	-	VRD3H44PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H45X	-	VRD3H45PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H45X	-	VRD3H45PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H46X	-	VRD3H46PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H46X	-	VRD3H46PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H47X	-	VRD3H47PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H47X	-	VRD3H47PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H48X	-	VRD3H48PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H48X	-	VRD3H48PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H49X	-	VRD3H49PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H49X	-	VRD3H49PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H4AX	-	VRD3H4APNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H4AX	-	VRD3H4APTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H4BX	-	VRD3H4BPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H4BX	-	VRD3H4BPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H4CX	-	VRD3H4CPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H4CX	-	VRD3H4CPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H4DX	-	VRD3H4DPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H4DX	-	VRD3H4DPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H4EX	-	VRD3H4EPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H4EX	-	VRD3H4EPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H4FX	-	VRD3H4FPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H4FX	-	VRD3H4FPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3H4GX	-	VRD3H4GPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H4GX	-	VRD3H4GPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H4HX	-	VRD3H4HPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H4HX	-	VRD3H4HPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H4JX	-	VRD3H4JPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H4JX	-	VRD3H4JPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H4KX	-	VRD3H4KPNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H4KX	-	VRD3H4KPTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3H50X	-	VRD3H50PNX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3H50X	-	VRD3H50PTX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J08X	-	VRD3J08NNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J08X	-	VRD3J08NTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J09X	-	VRD3J09NNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J09X	-	VRD3J09NTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J0JX	-	VRD3J0JNNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J0JX	-	VRD3J0JNTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J0KX	-	VRD3J0KNNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J0KX	-	VRD3J0KNTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J10X	-	VRD3J10NNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J10X	-	VRD3J10NTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J11X	-	VRD3J11NNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J11X	-	VRD3J11NTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J12X	-	VRD3J12NNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J12X	-	VRD3J12NTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J13X	-	VRD3J13NNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J13X	-	VRD3J13NTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J14X	-	VRD3J14NNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J14X	-	VRD3J14NTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J15X	-	VRD3J15NNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J15X	-	VRD3J15NTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J16X	-	VRD3J16NNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J16X	-	VRD3J16NTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J17X	-	VRD3J17NNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J17X	-	VRD3J17NTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J18X	-	VRD3J18NNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J18X	-	VRD3J18NTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J19X	-	VRD3J19NNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J19X	-	VRD3J19NTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J1AX	-	VRD3J1ANNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J1AX	-	VRD3J1ANTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J1BX	-	VRD3J1BNNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J1BX	-	VRD3J1BNTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J1CX	-	VRD3J1CNNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J1CX	-	VRD3J1CNTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J1DX	-	VRD3J1DNNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J1DX	-	VRD3J1DNTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J1EX	-	VRD3J1ENNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J1EX	-	VRD3J1ENTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J1FX	-	VRD3J1FNNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J1FX	-	VRD3J1FNTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J1GX	-	VRD3J1GNNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J1GX	-	VRD3J1GNTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J1HX	-	VRD3J1HNNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J1HX	-	VRD3J1HNTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J1JX	-	VRD3J1JNNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J1JX	-	VRD3J1JNTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J1KX	-	VRD3J1KPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J1KX	-	VRD3J1KPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J20X	-	VRD3J20PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J20X	-	VRD3J20PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J21X	-	VRD3J21PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J21X	-	VRD3J21PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J22X	-	VRD3J22PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J22X	-	VRD3J22PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J23X	-	VRD3J23PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J23X	-	VRD3J23PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J24X	-	VRD3J24PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J24X	-	VRD3J24PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J25X	-	VRD3J25PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J25X	-	VRD3J25PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3J26X	-	VRD3J26PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J26X	-	VRD3J26PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J27X	-	VRD3J27PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J27X	-	VRD3J27PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J28X	-	VRD3J28PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J28X	-	VRD3J28PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J29X	-	VRD3J29PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J29X	-	VRD3J29PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J2AX	-	VRD3J2APNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J2AX	-	VRD3J2APTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J2BX	-	VRD3J2BPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J2BX	-	VRD3J2BPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J2CX	-	VRD3J2CPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J2CX	-	VRD3J2CPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J2DX	-	VRD3J2DPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J2DX	-	VRD3J2DPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J2EX	-	VRD3J2EPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J2EX	-	VRD3J2EPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J2FX	-	VRD3J2FPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J2FX	-	VRD3J2FPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J2GX	-	VRD3J2GPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J2GX	-	VRD3J2GPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J2HX	-	VRD3J2HPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J2HX	-	VRD3J2HPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J2JX	-	VRD3J2JPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J2JX	-	VRD3J2JPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J2KX	-	VRD3J2KPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J2KX	-	VRD3J2KPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J30X	-	VRD3J30PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J30X	-	VRD3J30PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J31X	-	VRD3J31PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J31X	-	VRD3J31PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J32X	-	VRD3J32PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J32X	-	VRD3J32PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J33X	-	VRD3J33PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J33X	-	VRD3J33PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J34X	-	VRD3J34PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J34X	-	VRD3J34PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J35X	-	VRD3J35PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J35X	-	VRD3J35PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J36X	-	VRD3J36PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J36X	-	VRD3J36PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J37X	-	VRD3J37PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J37X	-	VRD3J37PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J38X	-	VRD3J38PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J38X	-	VRD3J38PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J39X	-	VRD3J39PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J39X	-	VRD3J39PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J3AX	-	VRD3J3APNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J3AX	-	VRD3J3APTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J3BX	-	VRD3J3BPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J3BX	-	VRD3J3BPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J3CX	-	VRD3J3CPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J3CX	-	VRD3J3CPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J3DX	-	VRD3J3DPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J3DX	-	VRD3J3DPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J3EX	-	VRD3J3EPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J3EX	-	VRD3J3EPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J3FX	-	VRD3J3FPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J3FX	-	VRD3J3FPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J3GX	-	VRD3J3GPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J3GX	-	VRD3J3GPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J3HX	-	VRD3J3HPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J3HX	-	VRD3J3HPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J3JX	-	VRD3J3JPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J3JX	-	VRD3J3JPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J3KX	-	VRD3J3KPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J3KX	-	VRD3J3KPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J40X	-	VRD3J40PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J40X	-	VRD3J40PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3J41X	-	VRD3J41PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J41X	-	VRD3J41PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J42X	-	VRD3J42PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J42X	-	VRD3J42PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J43X	-	VRD3J43PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J43X	-	VRD3J43PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J44X	-	VRD3J44PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J44X	-	VRD3J44PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J45X	-	VRD3J45PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J45X	-	VRD3J45PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J46X	-	VRD3J46PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J46X	-	VRD3J46PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J47X	-	VRD3J47PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J47X	-	VRD3J47PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J48X	-	VRD3J48PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J48X	-	VRD3J48PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J49X	-	VRD3J49PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J49X	-	VRD3J49PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J4AX	-	VRD3J4APNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J4AX	-	VRD3J4APTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J4BX	-	VRD3J4BPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J4BX	-	VRD3J4BPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J4CX	-	VRD3J4CPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J4CX	-	VRD3J4CPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J4DX	-	VRD3J4DPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J4DX	-	VRD3J4DPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J4EX	-	VRD3J4EPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J4EX	-	VRD3J4EPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J4FX	-	VRD3J4FPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J4FX	-	VRD3J4FPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J4GX	-	VRD3J4GPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J4GX	-	VRD3J4GPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J4HX	-	VRD3J4HPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J4HX	-	VRD3J4HPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J4JX	-	VRD3J4JPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J4JX	-	VRD3J4JPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J4KX	-	VRD3J4KPNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J4KX	-	VRD3J4KPTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3J50X	-	VRD3J50PNX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3J50X	-	VRD3J50PTX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K08X	-	VRD3K08NNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K08X	-	VRD3K08NTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K09X	-	VRD3K09NNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K09X	-	VRD3K09NTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K0JX	-	VRD3K0JNNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K0JX	-	VRD3K0JNTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K0KX	-	VRD3K0KNNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K0KX	-	VRD3K0KNTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K10X	-	VRD3K10NNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K10X	-	VRD3K10NTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K11X	-	VRD3K11NNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K11X	-	VRD3K11NTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K12X	-	VRD3K12NNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K12X	-	VRD3K12NTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K13X	-	VRD3K13NNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K13X	-	VRD3K13NTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K14X	-	VRD3K14NNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K14X	-	VRD3K14NTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K15X	-	VRD3K15NNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K15X	-	VRD3K15NTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K16X	-	VRD3K16NNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K16X	-	VRD3K16NTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K17X	-	VRD3K17NNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K17X	-	VRD3K17NTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K18X	-	VRD3K18NNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K18X	-	VRD3K18NTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K19X	-	VRD3K19NNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K19X	-	VRD3K19NTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K1AX	-	VRD3K1ANNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K1AX	-	VRD3K1ANTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3K1BX	-	VRD3K1BNNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K1BX	-	VRD3K1BNTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K1CX	-	VRD3K1CNNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K1CX	-	VRD3K1CNTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K1DX	-	VRD3K1DNNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K1DX	-	VRD3K1DNTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K1EX	-	VRD3K1ENNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K1EX	-	VRD3K1ENTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K1FX	-	VRD3K1FNNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K1FX	-	VRD3K1FNTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K1GX	-	VRD3K1GNNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K1GX	-	VRD3K1GNTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K1HX	-	VRD3K1HNNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K1HX	-	VRD3K1HNTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K1JX	-	VRD3K1JNNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K1JX	-	VRD3K1JNTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K1KX	-	VRD3K1KPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K1KX	-	VRD3K1KPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K20X	-	VRD3K20PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K20X	-	VRD3K20PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K21X	-	VRD3K21PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K21X	-	VRD3K21PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K22X	-	VRD3K22PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K22X	-	VRD3K22PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K23X	-	VRD3K23PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K23X	-	VRD3K23PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K24X	-	VRD3K24PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K24X	-	VRD3K24PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K25X	-	VRD3K25PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K25X	-	VRD3K25PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K26X	-	VRD3K26PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K26X	-	VRD3K26PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K27X	-	VRD3K27PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K27X	-	VRD3K27PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K28X	-	VRD3K28PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K28X	-	VRD3K28PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K29X	-	VRD3K29PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K29X	-	VRD3K29PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K2AX	-	VRD3K2APNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K2AX	-	VRD3K2APTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K2BX	-	VRD3K2BPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K2BX	-	VRD3K2BPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K2CX	-	VRD3K2CPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K2CX	-	VRD3K2CPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K2DX	-	VRD3K2DPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K2DX	-	VRD3K2DPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K2EX	-	VRD3K2EPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K2EX	-	VRD3K2EPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K2FX	-	VRD3K2FPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K2FX	-	VRD3K2FPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K2GX	-	VRD3K2GPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K2GX	-	VRD3K2GPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K2HX	-	VRD3K2HPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K2HX	-	VRD3K2HPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K2JX	-	VRD3K2JPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K2JX	-	VRD3K2JPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K2KX	-	VRD3K2KPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K2KX	-	VRD3K2KPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K30X	-	VRD3K30PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K30X	-	VRD3K30PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K31X	-	VRD3K31PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K31X	-	VRD3K31PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K32X	-	VRD3K32PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K32X	-	VRD3K32PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K33X	-	VRD3K33PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K33X	-	VRD3K33PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K34X	-	VRD3K34PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K34X	-	VRD3K34PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K35X	-	VRD3K35PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K35X	-	VRD3K35PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3K36X	-	VRD3K36PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K36X	-	VRD3K36PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K37X	-	VRD3K37PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K37X	-	VRD3K37PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K38X	-	VRD3K38PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K38X	-	VRD3K38PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K39X	-	VRD3K39PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K39X	-	VRD3K39PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K3AX	-	VRD3K3APNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K3AX	-	VRD3K3APTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K3BX	-	VRD3K3BPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K3BX	-	VRD3K3BPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K3CX	-	VRD3K3CPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K3CX	-	VRD3K3CPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K3DX	-	VRD3K3DPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K3DX	-	VRD3K3DPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K3EX	-	VRD3K3EPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K3EX	-	VRD3K3EPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K3FX	-	VRD3K3FPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K3FX	-	VRD3K3FPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K3GX	-	VRD3K3GPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K3GX	-	VRD3K3GPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K3HX	-	VRD3K3HPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K3HX	-	VRD3K3HPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K3JX	-	VRD3K3JPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K3JX	-	VRD3K3JPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K3KX	-	VRD3K3KPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K3KX	-	VRD3K3KPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K40X	-	VRD3K40PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K40X	-	VRD3K40PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K41X	-	VRD3K41PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K41X	-	VRD3K41PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K42X	-	VRD3K42PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K42X	-	VRD3K42PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K43X	-	VRD3K43PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K43X	-	VRD3K43PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K44X	-	VRD3K44PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K44X	-	VRD3K44PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K45X	-	VRD3K45PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K45X	-	VRD3K45PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K46X	-	VRD3K46PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K46X	-	VRD3K46PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K47X	-	VRD3K47PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K47X	-	VRD3K47PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K48X	-	VRD3K48PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K48X	-	VRD3K48PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K49X	-	VRD3K49PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K49X	-	VRD3K49PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K4AX	-	VRD3K4APNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K4AX	-	VRD3K4APTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K4BX	-	VRD3K4BPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K4BX	-	VRD3K4BPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K4CX	-	VRD3K4CPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K4CX	-	VRD3K4CPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K4DX	-	VRD3K4DPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K4DX	-	VRD3K4DPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K4EX	-	VRD3K4EPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K4EX	-	VRD3K4EPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K4FX	-	VRD3K4FPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K4FX	-	VRD3K4FPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K4GX	-	VRD3K4GPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K4GX	-	VRD3K4GPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K4HX	-	VRD3K4HPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K4HX	-	VRD3K4HPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K4JX	-	VRD3K4JPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K4JX	-	VRD3K4JPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K4KX	-	VRD3K4KPNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K4KX	-	VRD3K4KPTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D3K50X	-	VRD3K50PNX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D3K50X	-	VRD3K50PTX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3N02	-	MMDF3N02HD	n-MOSFET	V-MOS, Dual, LogL, 20V, 3,8A, <90mΩ	SOP-8	47	-	8d	Mot
D3N03	-	MMDF3N03HD	n-MOSFET	V-MOS, Dual, 30V, 4,1A, <70mΩ	SOP-8	47	-	8d	Mot
D4	-	RN2905AFS	Si-pnp-Digi	Dual, Sw, 50V, 80mA, 50mW, R1/R2=2.2k/47k	FS6	35	TD4	7b	Tos
D4008X	-	VRD4008NNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4008X	-	VRD4008NTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4009X	-	VRD4009NNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4009X	-	VRD4009NTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D400JX	-	VRD400JNNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D400JX	-	VRD400JNTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D400KX	-	VRD400KNNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D400KX	-	VRD400KNTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4010X	-	VRD4010NNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4010X	-	VRD4010NTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4011X	-	VRD4011NNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4011X	-	VRD4011NTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4012X	-	VRD4012NNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4012X	-	VRD4012NTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4013X	-	VRD4013NNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4013X	-	VRD4013NTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4014X	-	VRD4014NNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4014X	-	VRD4014NTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4015X	-	VRD4015NNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4015X	-	VRD4015NTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4016X	-	VRD4016NNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4016X	-	VRD4016NTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4017X	-	VRD4017NNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4017X	-	VRD4017NTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4018X	-	VRD4018NNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4018X	-	VRD4018NTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4019X	-	VRD4019NNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4019X	-	VRD4019NTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D401AX	-	VRD401ANNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D401AX	-	VRD401ANTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D401BX	-	VRD401BNNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D401BX	-	VRD401BNTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D401CX	-	VRD401CNNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D401CX	-	VRD401CNTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D401DX	-	VRD401DNNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D401DX	-	VRD401DNTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D401EX	-	VRD401ENNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D401EX	-	VRD401ENTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D401FX	-	VRD401FNNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D401FX	-	VRD401FNTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D401GX	-	VRD401GNNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D401GX	-	VRD401GNTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D401HX	-	VRD401HNNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D401HX	-	VRD401HNTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D401JX	-	VRD401JNNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D401JX	-	VRD401JNTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D401KX	-	VRD401KPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D401KX	-	VRD401KPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4020X	-	VRD4020PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4020X	-	VRD4020PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4021X	-	VRD4021PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4021X	-	VRD4021PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4022X	-	VRD4022PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4022X	-	VRD4022PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4023X	-	VRD4023PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4023X	-	VRD4023PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4024X	-	VRD4024PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4024X	-	VRD4024PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4025X	-	VRD4025PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4025X	-	VRD4025PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4026X	-	VRD4026PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4026X	-	VRD4026PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4027X	-	VRD4027PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4027X	-	VRD4027PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4028X	-	VRD4028PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4028X	-	VRD4028PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4029X	-	VRD4029PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4029X	-	VRD4029PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D402AX	-	VRD402APNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D402AX	-	VRD402APTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D402BX	-	VRD402BPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D402BX	-	VRD402BPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D402CX	-	VRD402CPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D402CX	-	VRD402CPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D402DX	-	VRD402DPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D402DX	-	VRD402DPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D402EX	-	VRD402EPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D402EX	-	VRD402EPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D402FX	-	VRD402FPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D402FX	-	VRD402FPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D402GX	-	VRD402GPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D402GX	-	VRD402GPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D402HX	-	VRD402HPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D402HX	-	VRD402HPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D402JX	-	VRD402JPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D402JX	-	VRD402JPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D402KX	-	VRD402KPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D402KX	-	VRD402KPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4030X	-	VRD4030PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4030X	-	VRD4030PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4031X	-	VRD4031PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4031X	-	VRD4031PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4032X	-	VRD4032PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4032X	-	VRD4032PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4033X	-	VRD4033PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4033X	-	VRD4033PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4034X	-	VRD4034PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4034X	-	VRD4034PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4035X	-	VRD4035PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4035X	-	VRD4035PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4036X	-	VRD4036PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4036X	-	VRD4036PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4037X	-	VRD4037PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4037X	-	VRD4037PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4038X	-	VRD4038PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4038X	-	VRD4038PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4039X	-	VRD4039PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4039X	-	VRD4039PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D403AX	-	VRD403APNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D403AX	-	VRD403APTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D403BX	-	VRD403BPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D403BX	-	VRD403BPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D403CX	-	VRD403CPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D403CX	-	VRD403CPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D403DX	-	VRD403DPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D403DX	-	VRD403DPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D403EX	-	VRD403EPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D403EX	-	VRD403EPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D403FX	-	VRD403FPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D403FX	-	VRD403FPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D403GX	-	VRD403GPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D403GX	-	VRD403GPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D403HX	-	VRD403HPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D403HX	-	VRD403HPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D403JX	-	VRD403JPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D403JX	-	VRD403JPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D403KX	-	VRD403KPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D403KX	-	VRD403KPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4040X	-	VRD4040PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4040X	-	VRD4040PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4041X	-	VRD4041PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4041X	-	VRD4041PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4042X	-	VRD4042PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4042X	-	VRD4042PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4043X	-	VRD4043PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4043X	-	VRD4043PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4044X	-	VRD4044PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4044X	-	VRD4044PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4045X	-	VRD4045PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4045X	-	VRD4045PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4046X	-	VRD4046PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4046X	-	VRD4046PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4047X	-	VRD4047PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4047X	-	VRD4047PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4048X	-	VRD4048PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4048X	-	VRD4048PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4049X	-	VRD4049PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4049X	-	VRD4049PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D404AX	-	VRD404APNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D404AX	-	VRD404APTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D404BX	-	VRD404BPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D404BX	-	VRD404BPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D404CX	-	VRD404CPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D404CX	-	VRD404CPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D404DX	-	VRD404DPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D404DX	-	VRD404DPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D404EX	-	VRD404EPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D404EX	-	VRD404EPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D404FX	-	VRD404FPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D404FX	-	VRD404FPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D404GX	-	VRD404GPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D404GX	-	VRD404GPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D404HX	-	VRD404HPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D404HX	-	VRD404HPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D404JX	-	VRD404JPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D404JX	-	VRD404JPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D404KX	-	VRD404KPNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D404KX	-	VRD404KPTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4050X	-	VRD4050PNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4050X	-	VRD4050PTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D40A	-	R1171S401A	LVR-IC	LDO, 4.0V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D40B	-	R1171S401B	LVR-IC	LDO, 4.0V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D4108X	-	VRD4108NNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4108X	-	VRD4108NTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4109X	-	VRD4109NNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4109X	-	VRD4109NTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D410JX	-	VRD410JNNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D410JX	-	VRD410JNTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D410KX	-	VRD410KNNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D410KX	-	VRD410KNTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4110X	-	VRD4110NNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4110X	-	VRD4110NTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4111X	-	VRD4111NNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4111X	-	VRD4111NTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4112X	-	VRD4112NNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4112X	-	VRD4112NTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4113X	-	VRD4113NNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4113X	-	VRD4113NTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4114X	-	VRD4114NNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4114X	-	VRD4114NTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4115X	-	VRD4115NNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4115X	-	VRD4115NTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4116X	-	VRD4116NNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4116X	-	VRD4116NTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4117X	-	VRD4117NNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4117X	-	VRD4117NTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4118X	-	VRD4118NNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4118X	-	VRD4118NTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4119X	-	VRD4119NNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4119X	-	VRD4119NTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D411AX	-	VRD411ANNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D411AX	-	VRD411ANTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D411BX	-	VRD411BNNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D411BX	-	VRD411BNTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D411CX	-	VRD411CNNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D411CX	-	VRD411CNTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D411DX	-	VRD411DNNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D411DX	-	VRD411DNTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D411EX	-	VRD411ENNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D411EX	-	VRD411ENTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D411FX	-	VRD411FNNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D411FX	-	VRD411FNTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D411GX	-	VRD411GNNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D411GX	-	VRD411GNTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D411HX	-	VRD411HNNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D411HX	-	VRD411HNTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D411JX	-	VRD411JNNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D411JX	-	VRD411JNTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D411KX	-	VRD411KPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D411KX	-	VRD411KPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4120X	-	VRD4120PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4120X	-	VRD4120PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4121X	-	VRD4121PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4121X	-	VRD4121PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4122X	-	VRD4122PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4122X	-	VRD4122PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4123X	-	VRD4123PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4123X	-	VRD4123PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4124X	-	VRD4124PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4124X	-	VRD4124PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4125X	-	VRD4125PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4125X	-	VRD4125PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4126X	-	VRD4126PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4126X	-	VRD4126PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4127X	-	VRD4127PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4127X	-	VRD4127PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4128X	-	VRD4128PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4128X	-	VRD4128PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4129X	-	VRD4129PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4129X	-	VRD4129PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D412AX	-	VRD412APNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D412AX	-	VRD412APTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D412BX	-	VRD412BPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D412BX	-	VRD412BPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D412CX	-	VRD412CPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D412CX	-	VRD412CPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D412DX	-	VRD412DPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D412DX	-	VRD412DPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D412EX	-	VRD412EPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D412EX	-	VRD412EPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D412FX	-	VRD412FPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D412FX	-	VRD412FPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D412GX	-	VRD412GPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D412GX	-	VRD412GPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D412HX	-	VRD412HPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D412HX	-	VRD412HPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D412JX	-	VRD412JPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D412JX	-	VRD412JPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D412KX	-	VRD412KPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D412KX	-	VRD412KPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4130X	-	VRD4130PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4130X	-	VRD4130PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4131X	-	VRD4131PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4131X	-	VRD4131PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4132X	-	VRD4132PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4132X	-	VRD4132PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4133X	-	VRD4133PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4133X	-	VRD4133PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4134X	-	VRD4134PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4134X	-	VRD4134PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4135X	-	VRD4135PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4135X	-	VRD4135PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4136X	-	VRD4136PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4136X	-	VRD4136PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4137X	-	VRD4137PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4137X	-	VRD4137PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4138X	-	VRD4138PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4138X	-	VRD4138PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4139X	-	VRD4139PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4139X	-	VRD4139PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D413AX	-	VRD413APNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D413AX	-	VRD413APTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D413BX	-	VRD413BPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D413BX	-	VRD413BPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D413CX	-	VRD413CPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D413CX	-	VRD413CPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D413DX	-	VRD413DPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D413DX	-	VRD413DPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D413EX	-	VRD413EPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D413EX	-	VRD413EPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D413FX	-	VRD413FPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D413FX	-	VRD413FPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D413GX	-	VRD413GPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D413GX	-	VRD413GPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D413HX	-	VRD413HPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D413HX	-	VRD413HPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D413JX	-	VRD413JPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D413JX	-	VRD413JPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D413KX	-	VRD413KPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D413KX	-	VRD413KPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4140X	-	VRD4140PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4140X	-	VRD4140PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4141X	-	VRD4141PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4141X	-	VRD4141PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4142X	-	VRD4142PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4142X	-	VRD4142PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4143X	-	VRD4143PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4143X	-	VRD4143PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4144X	-	VRD4144PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4144X	-	VRD4144PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4145X	-	VRD4145PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4145X	-	VRD4145PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4146X	-	VRD4146PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4146X	-	VRD4146PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4147X	-	VRD4147PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4147X	-	VRD4147PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4148X	-	VRD4148PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4148X	-	VRD4148PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4149X	-	VRD4149PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4149X	-	VRD4149PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D414AX	-	VRD414APNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D414AX	-	VRD414APTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D414BX	-	VRD414BPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D414BX	-	VRD414BPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D414CX	-	VRD414CPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D414CX	-	VRD414CPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D414DX	-	VRD414DPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D414DX	-	VRD414DPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D414EX	-	VRD414EPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D414EX	-	VRD414EPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D414FX	-	VRD414FPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D414FX	-	VRD414FPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D414GX	-	VRD414GPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D414GX	-	VRD414GPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D414HX	-	VRD414HPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D414HX	-	VRD414HPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D414JX	-	VRD414JPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D414JX	-	VRD414JPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D414KX	-	VRD414KPNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D414KX	-	VRD414KPTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4150X	-	VRD4150PNX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4150X	-	VRD4150PTX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D41A	-	R1171S411A	LVR-IC	LDO, 4.1V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D41B	-	R1171S411B	LVR-IC	LDO, 4.1V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D4208X	-	VRD4208NNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4208X	-	VRD4208NTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4209X	-	VRD4209NNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4209X	-	VRD4209NTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D420JX	-	VRD420JNNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D420JX	-	VRD420JNTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D420KX	-	VRD420KNNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D420KX	-	VRD420KNTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4210X	-	VRD4210NNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4210X	-	VRD4210NTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4211X	-	VRD4211NNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4211X	-	VRD4211NTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4212X	-	VRD4212NNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4212X	-	VRD4212NTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4213X	-	VRD4213NNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4213X	-	VRD4213NTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4214X	-	VRD4214NNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4214X	-	VRD4214NTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4215X	-	VRD4215NNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4215X	-	VRD4215NTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4216X	-	VRD4216NNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4216X	-	VRD4216NTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4217X	-	VRD4217NNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4217X	-	VRD4217NTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4218X	-	VRD4218NNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4218X	-	VRD4218NTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4219X	-	VRD4219NNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4219X	-	VRD4219NTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D421AX	-	VRD421ANNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D421AX	-	VRD421ANTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D421BX	-	VRD421BNNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D421BX	-	VRD421BNTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D421CX	-	VRD421CNNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D421CX	-	VRD421CNTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D421DX	-	VRD421DNNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D421DX	-	VRD421DNTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D421EX	-	VRD421ENNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D421EX	-	VRD421ENTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D421FX	-	VRD421FNNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D421FX	-	VRD421FNTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D421GX	-	VRD421GNNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D421GX	-	VRD421GNTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D421HX	-	VRD421HNNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D421HX	-	VRD421HNTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D421JX	-	VRD421JNNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D421JX	-	VRD421JNTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D421KX	-	VRD421KPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D421KX	-	VRD421KPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4220X	-	VRD4220PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4220X	-	VRD4220PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4221X	-	VRD4221PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4221X	-	VRD4221PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4222X	-	VRD4222PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4222X	-	VRD4222PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4223X	-	VRD4223PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4223X	-	VRD4223PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4224X	-	VRD4224PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4224X	-	VRD4224PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4225X	-	VRD4225PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4225X	-	VRD4225PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4226X	-	VRD4226PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4226X	-	VRD4226PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4227X	-	VRD4227PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4227X	-	VRD4227PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4228X	-	VRD4228PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4228X	-	VRD4228PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4229X	-	VRD4229PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4229X	-	VRD4229PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D422AX	-	VRD422APNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D422AX	-	VRD422APTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D422BX	-	VRD422BPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D422BX	-	VRD422BPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D422CX	-	VRD422CPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D422CX	-	VRD422CPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D422DX	-	VRD422DPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D422DX	-	VRD422DPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D422EX	-	VRD422EPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D422EX	-	VRD422EPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D422FX	-	VRD422FPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D422FX	-	VRD422FPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D422GX	-	VRD422GPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D422GX	-	VRD422GPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D422HX	-	VRD422HPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D422HX	-	VRD422HPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D422JX	-	VRD422JPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D422JX	-	VRD422JPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D422KX	-	VRD422KPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D422KX	-	VRD422KPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4230X	-	VRD4230PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4230X	-	VRD4230PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4231X	-	VRD4231PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4231X	-	VRD4231PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4232X	-	VRD4232PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4232X	-	VRD4232PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4233X	-	VRD4233PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4233X	-	VRD4233PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4234X	-	VRD4234PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4234X	-	VRD4234PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4235X	-	VRD4235PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4235X	-	VRD4235PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4236X	-	VRD4236PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4236X	-	VRD4236PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4237X	-	VRD4237PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4237X	-	VRD4237PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4238X	-	VRD4238PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4238X	-	VRD4238PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4239X	-	VRD4239PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4239X	-	VRD4239PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D423AX	-	VRD423APNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D423AX	-	VRD423APTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D423BX	-	VRD423BPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D423BX	-	VRD423BPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D423CX	-	VRD423CPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D423CX	-	VRD423CPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D423DX	-	VRD423DPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D423DX	-	VRD423DPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D423EX	-	VRD423EPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D423EX	-	VRD423EPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D423FX	-	VRD423FPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D423FX	-	VRD423FPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D423GX	-	VRD423GPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D423GX	-	VRD423GPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D423HX	-	VRD423HPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D423HX	-	VRD423HPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D423JX	-	VRD423JPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D423JX	-	VRD423JPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D423KX	-	VRD423KPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D423KX	-	VRD423KPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4240X	-	VRD4240PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4240X	-	VRD4240PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4241X	-	VRD4241PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4241X	-	VRD4241PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4242X	-	VRD4242PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4242X	-	VRD4242PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4243X	-	VRD4243PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4243X	-	VRD4243PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4244X	-	VRD4244PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4244X	-	VRD4244PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4245X	-	VRD4245PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4245X	-	VRD4245PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4246X	-	VRD4246PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4246X	-	VRD4246PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4247X	-	VRD4247PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4247X	-	VRD4247PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4248X	-	VRD4248PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4248X	-	VRD4248PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4249X	-	VRD4249PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4249X	-	VRD4249PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D424AX	-	VRD424APNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D424AX	-	VRD424APTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D424BX	-	VRD424BPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D424BX	-	VRD424BPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D424CX	-	VRD424CPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D424CX	-	VRD424CPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D424DX	-	VRD424DPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D424DX	-	VRD424DPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D424EX	-	VRD424EPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D424EX	-	VRD424EPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D424FX	-	VRD424FPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D424FX	-	VRD424FPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D424GX	-	VRD424GPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D424GX	-	VRD424GPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D424HX	-	VRD424HPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D424HX	-	VRD424HPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D424JX	-	VRD424JPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D424JX	-	VRD424JPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D424KX	-	VRD424KPNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D424KX	-	VRD424KPTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4250X	-	VRD4250PNX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4250X	-	VRD4250PTX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D42A	-	R1171S421A	LVR-IC	LDO, 4.2V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D42B	-	R1171S421B	LVR-IC	LDO, 4.2V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D4308X	-	VRD4308NNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4308X	-	VRD4308NTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4309X	-	VRD4309NNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4309X	-	VRD4309NTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D430JX	-	VRD430JNNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D430JX	-	VRD430JNTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D430KX	-	VRD430KNNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D430KX	-	VRD430KNTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4310X	-	VRD4310NNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4310X	-	VRD4310NTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4311X	-	VRD4311NNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4311X	-	VRD4311NTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4312X	-	VRD4312NNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4312X	-	VRD4312NTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4313X	-	VRD4313NNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4313X	-	VRD4313NTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4314X	-	VRD4314NNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4314X	-	VRD4314NTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4315X	-	VRD4315NNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4315X	-	VRD4315NTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4316X	-	VRD4316NNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4316X	-	VRD4316NTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4317X	-	VRD4317NNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4317X	-	VRD4317NTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4318X	-	VRD4318NNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4318X	-	VRD4318NTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4319X	-	VRD4319NNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4319X	-	VRD4319NTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D431AX	-	VRD431ANNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D431AX	-	VRD431ANTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D431BX	-	VRD431BNNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D431BX	-	VRD431BNTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D431CX	-	VRD431CNNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D431CX	-	VRD431CNTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D431DX	-	VRD431DNNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D431DX	-	VRD431DNTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D431EX	-	VRD431ENNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D431EX	-	VRD431ENTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D431FX	-	VRD431FNNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D431FX	-	VRD431FNTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D431GX	-	VRD431GNNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D431GX	-	VRD431GNTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D431HX	-	VRD431HNNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D431HX	-	VRD431HNTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D431JX	-	VRD431JNNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D431JX	-	VRD431JNTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D431KX	-	VRD431KPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D431KX	-	VRD431KPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4320X	-	VRD4320PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4320X	-	VRD4320PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4321X	-	VRD4321PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4321X	-	VRD4321PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4322X	-	VRD4322PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4322X	-	VRD4322PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4323X	-	VRD4323PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4323X	-	VRD4323PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4324X	-	VRD4324PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4324X	-	VRD4324PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4325X	-	VRD4325PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4325X	-	VRD4325PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4326X	-	VRD4326PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4326X	-	VRD4326PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4327X	-	VRD4327PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4327X	-	VRD4327PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4328X	-	VRD4328PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4328X	-	VRD4328PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4329X	-	VRD4329PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4329X	-	VRD4329PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D432AX	-	VRD432APNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D432AX	-	VRD432APTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D432BX	-	VRD432BPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D432BX	-	VRD432BPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D432CX	-	VRD432CPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D432CX	-	VRD432CPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D432DX	-	VRD432DPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D432DX	-	VRD432DPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D432EX	-	VRD432EPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D432EX	-	VRD432EPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D432FX	-	VRD432FPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D432FX	-	VRD432FPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D432GX	-	VRD432GPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D432GX	-	VRD432GPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D432HX	-	VRD432HPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D432HX	-	VRD432HPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D432JX	-	VRD432JPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D432JX	-	VRD432JPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D432KX	-	VRD432KPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D432KX	-	VRD432KPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4330X	-	VRD4330PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4330X	-	VRD4330PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4331X	-	VRD4331PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4331X	-	VRD4331PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4332X	-	VRD4332PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4332X	-	VRD4332PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4333X	-	VRD4333PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4333X	-	VRD4333PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4334X	-	VRD4334PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4334X	-	VRD4334PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4335X	-	VRD4335PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4335X	-	VRD4335PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4336X	-	VRD4336PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4336X	-	VRD4336PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4337X	-	VRD4337PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4337X	-	VRD4337PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4338X	-	VRD4338PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4338X	-	VRD4338PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4339X	-	VRD4339PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4339X	-	VRD4339PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D433AX	-	VRD433APNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D433AX	-	VRD433APTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D433BX	-	VRD433BPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D433BX	-	VRD433BPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D433CX	-	VRD433CPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D433CX	-	VRD433CPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D433DX	-	VRD433DPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D433DX	-	VRD433DPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D433EX	-	VRD433EPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D433EX	-	VRD433EPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D433FX	-	VRD433FPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D433FX	-	VRD433FPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D433GX	-	VRD433GPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D433GX	-	VRD433GPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D433HX	-	VRD433HPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D433HX	-	VRD433HPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D433JX	-	VRD433JPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D433JX	-	VRD433JPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D433KX	-	VRD433KPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D433KX	-	VRD433KPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4340X	-	VRD4340PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4340X	-	VRD4340PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4341X	-	VRD4341PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4341X	-	VRD4341PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4342X	-	VRD4342PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4342X	-	VRD4342PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4343X	-	VRD4343PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4343X	-	VRD4343PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4344X	-	VRD4344PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4344X	-	VRD4344PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4345X	-	VRD4345PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4345X	-	VRD4345PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4346X	-	VRD4346PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4346X	-	VRD4346PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4347X	-	VRD4347PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4347X	-	VRD4347PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4348X	-	VRD4348PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4348X	-	VRD4348PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4349X	-	VRD4349PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4349X	-	VRD4349PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D434AX	-	VRD434APNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D434AX	-	VRD434APTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D434BX	-	VRD434BPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D434BX	-	VRD434BPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D434CX	-	VRD434CPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D434CX	-	VRD434CPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D434DX	-	VRD434DPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D434DX	-	VRD434DPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D434EX	-	VRD434EPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D434EX	-	VRD434EPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D434FX	-	VRD434FPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D434FX	-	VRD434FPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D434GX	-	VRD434GPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D434GX	-	VRD434GPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D434HX	-	VRD434HPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D434HX	-	VRD434HPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D434JX	-	VRD434JPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D434JX	-	VRD434JPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D434KX	-	VRD434KPNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D434KX	-	VRD434KPTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4350X	-	VRD4350PNX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4350X	-	VRD4350PTX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D43A	-	R1171S431A	LVR-IC	LDO, 4.3V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D43B	-	R1171S431B	LVR-IC	LDO, 4.3V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D4408X	-	VRD4408NNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4408X	-	VRD4408NTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4409X	-	VRD4409NNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4409X	-	VRD4409NTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D440JX	-	VRD440JNNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D440JX	-	VRD440JNTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D440KX	-	VRD440KNNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D440KX	-	VRD440KNTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4410X	-	VRD4410NNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4410X	-	VRD4410NTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4411X	-	VRD4411NNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4411X	-	VRD4411NTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4412X	-	VRD4412NNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4412X	-	VRD4412NTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4413X	-	VRD4413NNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4413X	-	VRD4413NTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4414X	-	VRD4414NNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4414X	-	VRD4414NTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4415X	-	VRD4415NNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4415X	-	VRD4415NTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4416X	-	VRD4416NNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4416X	-	VRD4416NTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4417X	-	VRD4417NNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4417X	-	VRD4417NTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4418X	-	VRD4418NNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4418X	-	VRD4418NTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4419X	-	VRD4419NNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4419X	-	VRD4419NTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D441AX	-	VRD441ANNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D441AX	-	VRD441ANTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D441BX	-	VRD441BNNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D441BX	-	VRD441BNTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D441CX	-	VRD441CNNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D441CX	-	VRD441CNTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D441DX	-	VRD441DNNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D441DX	-	VRD441DNTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D441EX	-	VRD441ENNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D441EX	-	VRD441ENTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D441FX	-	VRD441FNNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D441FX	-	VRD441FNTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D441GX	-	VRD441GNNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D441GX	-	VRD441GNTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D441HX	-	VRD441HNNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D441HX	-	VRD441HNTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D441JX	-	VRD441JNNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D441JX	-	VRD441JNTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D441KX	-	VRD441KPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D441KX	-	VRD441KPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4420X	-	VRD4420PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4420X	-	VRD4420PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4421X	-	VRD4421PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4421X	-	VRD4421PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4422X	-	VRD4422PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4422X	-	VRD4422PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4423X	-	VRD4423PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4423X	-	VRD4423PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4424X	-	VRD4424PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4424X	-	VRD4424PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4425X	-	VRD4425PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4425X	-	VRD4425PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4426X	-	VRD4426PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4426X	-	VRD4426PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4427X	-	VRD4427PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4427X	-	VRD4427PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4428X	-	VRD4428PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4428X	-	VRD4428PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4429X	-	VRD4429PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4429X	-	VRD4429PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D442AX	-	VRD442APNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D442AX	-	VRD442APTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D442BX	-	VRD442BPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D442BX	-	VRD442BPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D442CX	-	VRD442CPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D442CX	-	VRD442CPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D442DX	-	VRD442DPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D442DX	-	VRD442DPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D442EX	-	VRD442EPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D442EX	-	VRD442EPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D442FX	-	VRD442FPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D442FX	-	VRD442FPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D442GX	-	VRD442GPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D442GX	-	VRD442GPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D442HX	-	VRD442HPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D442HX	-	VRD442HPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D442JX	-	VRD442JPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D442JX	-	VRD442JPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D442KX	-	VRD442KPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D442KX	-	VRD442KPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4430X	-	VRD4430PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4430X	-	VRD4430PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4431X	-	VRD4431PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4431X	-	VRD4431PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4432X	-	VRD4432PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4432X	-	VRD4432PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4433X	-	VRD4433PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4433X	-	VRD4433PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4434X	-	VRD4434PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4434X	-	VRD4434PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4435X	-	VRD4435PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4435X	-	VRD4435PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4436X	-	VRD4436PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4436X	-	VRD4436PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4437X	-	VRD4437PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4437X	-	VRD4437PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4438X	-	VRD4438PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4438X	-	VRD4438PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4439X	-	VRD4439PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4439X	-	VRD4439PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D443AX	-	VRD443APNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D443AX	-	VRD443APTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D443BX	-	VRD443BPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D443BX	-	VRD443BPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D443CX	-	VRD443CPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D443CX	-	VRD443CPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D443DX	-	VRD443DPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D443DX	-	VRD443DPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D443EX	-	VRD443EPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D443EX	-	VRD443EPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D443FX	-	VRD443FPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D443FX	-	VRD443FPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D443GX	-	VRD443GPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D443GX	-	VRD443GPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D443HX	-	VRD443HPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D443HX	-	VRD443HPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D443JX	-	VRD443JPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D443JX	-	VRD443JPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D443KX	-	VRD443KPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D443KX	-	VRD443KPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4440X	-	VRD4440PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4440X	-	VRD4440PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4441X	-	VRD4441PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4441X	-	VRD4441PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4442X	-	VRD4442PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4442X	-	VRD4442PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4443X	-	VRD4443PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4443X	-	VRD4443PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4444X	-	VRD4444PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4444X	-	VRD4444PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4445X	-	VRD4445PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4445X	-	VRD4445PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4446X	-	VRD4446PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4446X	-	VRD4446PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4447X	-	VRD4447PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4447X	-	VRD4447PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4448X	-	VRD4448PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4448X	-	VRD4448PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4449X	-	VRD4449PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4449X	-	VRD4449PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D444AX	-	VRD444APNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D444AX	-	VRD444APTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D444BX	-	VRD444BPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D444BX	-	VRD444BPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D444CX	-	VRD444CPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D444CX	-	VRD444CPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D444DX	-	VRD444DPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D444DX	-	VRD444DPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D444EX	-	VRD444EPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D444EX	-	VRD444EPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D444FX	-	VRD444FPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D444FX	-	VRD444FPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D444GX	-	VRD444GPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D444GX	-	VRD444GPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D444HX	-	VRD444HPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D444HX	-	VRD444HPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D444JX	-	VRD444JPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D444JX	-	VRD444JPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D444KX	-	VRD444KPNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D444KX	-	VRD444KPTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4450X	-	VRD4450PNX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4450X	-	VRD4450PTX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D44A	-	R1171S441A	LVR-IC	LDO, 4.4V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D44B	-	R1171S441B	LVR-IC	LDO, 4.4V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D4508X	-	VRD4508NNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4508X	-	VRD4508NTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4509X	-	VRD4509NNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4509X	-	VRD4509NTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D450JX	-	VRD450JNNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D450JX	-	VRD450JNTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D450KX	-	VRD450KNNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D450KX	-	VRD450KNTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4510X	-	VRD4510NNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4510X	-	VRD4510NTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4511X	-	VRD4511NNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4511X	-	VRD4511NTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4512X	-	VRD4512NNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4512X	-	VRD4512NTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4513X	-	VRD4513NNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4513X	-	VRD4513NTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4514X	-	VRD4514NNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4514X	-	VRD4514NTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4515X	-	VRD4515NNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4515X	-	VRD4515NTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4516X	-	VRD4516NNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4516X	-	VRD4516NTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4517X	-	VRD4517NNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4517X	-	VRD4517NTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4518X	-	VRD4518NNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4518X	-	VRD4518NTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4519X	-	VRD4519NNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4519X	-	VRD4519NTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D451AX	-	VRD451ANNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D451AX	-	VRD451ANTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D451BX	-	VRD451BNNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D451BX	-	VRD451BNTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D451CX	-	VRD451CNNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D451CX	-	VRD451CNTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D451DX	-	VRD451DNNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D451DX	-	VRD451DNTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D451EX	-	VRD451ENNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D451EX	-	VRD451ENTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D451FX	-	VRD451FNNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D451FX	-	VRD451FNTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D451GX	-	VRD451GNNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D451GX	-	VRD451GNTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D451HX	-	VRD451HNNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D451HX	-	VRD451HNTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D451JX	-	VRD451JNNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D451JX	-	VRD451JNTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D451KX	-	VRD451KPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D451KX	-	VRD451KPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4520X	-	VRD4520PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4520X	-	VRD4520PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4521X	-	VRD4521PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4521X	-	VRD4521PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4522X	-	VRD4522PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4522X	-	VRD4522PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4523X	-	VRD4523PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4523X	-	VRD4523PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4524X	-	VRD4524PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4524X	-	VRD4524PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4525X	-	VRD4525PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4525X	-	VRD4525PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4526X	-	VRD4526PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4526X	-	VRD4526PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4527X	-	VRD4517PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4527X	-	VRD4517PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4528X	-	VRD4528PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4528X	-	VRD4528PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4529X	-	VRD4529PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4529X	-	VRD4529PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D452AX	-	VRD452APNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D452AX	-	VRD452APTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D452BX	-	VRD452BPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D452BX	-	VRD452BPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D452CX	-	VRD452CPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D452CX	-	VRD452CPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D452DX	-	VRD452DPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D452DX	-	VRD452DPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D452EX	-	VRD452EPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D452EX	-	VRD452EPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D452FX	-	VRD452FPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D452FX	-	VRD452FPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D452GX	-	VRD452GPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D452GX	-	VRD452GPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D452HX	-	VRD452HPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D452HX	-	VRD452HPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D452JX	-	VRD452JPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D452JX	-	VRD452JPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D452KX	-	VRD452KPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D452KX	-	VRD452KPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4530X	-	VRD4530PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4530X	-	VRD4530PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4531X	-	VRD4531PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4531X	-	VRD4531PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4532X	-	VRD4532PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4532X	-	VRD4532PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4533X	-	VRD4533PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4533X	-	VRD4533PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4534X	-	VRD4534PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4534X	-	VRD4534PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4535X	-	VRD4535PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4535X	-	VRD4535PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4536X	-	VRD4536PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4536X	-	VRD4536PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4537X	-	VRD4537PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4537X	-	VRD4537PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4538X	-	VRD4538PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4538X	-	VRD4538PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4539X	-	VRD4539PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4539X	-	VRD4539PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D453AX	-	VRD453APNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D453AX	-	VRD453APTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D453BX	-	VRD453BPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D453BX	-	VRD453BPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D453CX	-	VRD453CPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D453CX	-	VRD453CPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D453DX	-	VRD453DPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D453DX	-	VRD453DPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D453EX	-	VRD453EPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D453EX	-	VRD453EPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D453FX	-	VRD453FPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D453FX	-	VRD453FPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D453GX	-	VRD453GPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D453GX	-	VRD453GPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D453HX	-	VRD453HPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D453HX	-	VRD453HPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D453JX	-	VRD453JPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D453JX	-	VRD453JPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D453KX	-	VRD453KPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D453KX	-	VRD453KPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4540X	-	VRD4540PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4540X	-	VRD4540PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4541X	-	VRD4541PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4541X	-	VRD4541PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4542X	-	VRD4542PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4542X	-	VRD4542PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4543X	-	VRD4543PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4543X	-	VRD4543PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4544X	-	VRD4544PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4544X	-	VRD4544PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4545X	-	VRD4545PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4545X	-	VRD4545PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4546X	-	VRD4546PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4546X	-	VRD4546PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4547X	-	VRD4547PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4547X	-	VRD4547PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4548X	-	VRD4548PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4548X	-	VRD4548PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4549X	-	VRD4549PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4549X	-	VRD4549PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D454AX	-	VRD454APNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D454AX	-	VRD454APTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D454BX	-	VRD454BPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D454BX	-	VRD454BPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D454CX	-	VRD454CPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D454CX	-	VRD454CPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D454DX	-	VRD454DPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D454DX	-	VRD454DPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D454EX	-	VRD454EPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D454EX	-	VRD454EPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D454FX	-	VRD454FPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D454FX	-	VRD454FPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D454GX	-	VRD454GPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D454GX	-	VRD454GPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D454HX	-	VRD454HPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D454HX	-	VRD454HPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D454JX	-	VRD454JPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D454JX	-	VRD454JPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D454KX	-	VRD454KPNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D454KX	-	VRD454KPTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4550X	-	VRD4550PNX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4550X	-	VRD4550PTX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D45A	-	R1171S451A	LVR-IC	LDO, 4.5V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D45B	-	R1171S451B	LVR-IC	LDO, 4.5V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D4608X	-	VRD4608NNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4608X	-	VRD4608NTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4609X	-	VRD4609NNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4609X	-	VRD4609NTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D460JX	-	VRD460JNNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D460JX	-	VRD460JNTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D460KX	-	VRD460KNNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D460KX	-	VRD460KNTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4610X	-	VRD4610NNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4610X	-	VRD4610NTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4611X	-	VRD4611NNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4611X	-	VRD4611NTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4612X	-	VRD4612NNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4612X	-	VRD4612NTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4613X	-	VRD4613NNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4613X	-	VRD4613NTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4614X	-	VRD4614NNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4614X	-	VRD4614NTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4615X	-	VRD4615NNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4615X	-	VRD4615NTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4616X	-	VRD4616NNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4616X	-	VRD4616NTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4617X	-	VRD4617NNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4617X	-	VRD4617NTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4618X	-	VRD4618NNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4618X	-	VRD4618NTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4619X	-	VRD4619NNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4619X	-	VRD4619NTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D461AX	-	VRD461ANNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D461AX	-	VRD461ANTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D461BX	-	VRD461BNNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D461BX	-	VRD461BNTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D461CX	-	VRD461CNNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D461CX	-	VRD461CNTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D461DX	-	VRD461DNNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D461DX	-	VRD461DNTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D461EX	-	VRD461ENNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D461EX	-	VRD461ENTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D461FX	-	VRD461FNNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D461FX	-	VRD461FNTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D461GX	-	VRD461GNNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D461GX	-	VRD461GNTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D461HX	-	VRD461HNNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D461HX	-	VRD461HNTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D461JX	-	VRD461JNNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D461JX	-	VRD461JNTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D461KX	-	VRD461KPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D461KX	-	VRD461KPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4620X	-	VRD4620PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4620X	-	VRD4620PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4621X	-	VRD4621PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4621X	-	VRD4621PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4622X	-	VRD4622PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4622X	-	VRD4622PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4623X	-	VRD4623PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4623X	-	VRD4623PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4624X	-	VRD4624PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4624X	-	VRD4624PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4625X	-	VRD4625PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4625X	-	VRD4625PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4626X	-	VRD4626PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4626X	-	VRD4626PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4627X	-	VRD4627PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4627X	-	VRD4627PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4628X	-	VRD4628PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4628X	-	VRD4628PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4629X	-	VRD4629PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4629X	-	VRD4629PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D462AX	-	VRD462APNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D462AX	-	VRD462APTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D462BX	-	VRD462BPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D462BX	-	VRD462BPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D462CX	-	VRD462CPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D462CX	-	VRD462CPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D462DX	-	VRD462DPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D462DX	-	VRD462DPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D462EX	-	VRD462EPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D462EX	-	VRD462EPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D462FX	-	VRD462FPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D462FX	-	VRD462FPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D462GX	-	VRD462GPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D462GX	-	VRD462GPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D462HX	-	VRD462HPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D462HX	-	VRD462HPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D462JX	-	VRD462JPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D462JX	-	VRD462JPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D462KX	-	VRD462KPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D462KX	-	VRD462KPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4630X	-	VRD4630PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4630X	-	VRD4630PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4631X	-	VRD4631PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4631X	-	VRD4631PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4632X	-	VRD4632PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4632X	-	VRD4632PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4633X	-	VRD4633PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4633X	-	VRD4633PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4634X	-	VRD4634PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4634X	-	VRD4634PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4635X	-	VRD4635PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4635X	-	VRD4635PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4636X	-	VRD4636PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4636X	-	VRD4636PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4637X	-	VRD4637PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4637X	-	VRD4637PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4638X	-	VRD4638PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4638X	-	VRD4638PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4639X	-	VRD4639PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4639X	-	VRD4639PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D463AX	-	VRD463APNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D463AX	-	VRD463APTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D463BX	-	VRD463BPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D463BX	-	VRD463BPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D463CX	-	VRD463CPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D463CX	-	VRD463CPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D463DX	-	VRD463DPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D463DX	-	VRD463DPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D463EX	-	VRD463EPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D463EX	-	VRD463EPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D463FX	-	VRD463FPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D463FX	-	VRD463FPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D463GX	-	VRD463GPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D463GX	-	VRD463GPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D463HX	-	VRD463HPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D463HX	-	VRD463HPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D463JX	-	VRD463JPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D463JX	-	VRD463JPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D463KX	-	VRD463KPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D463KX	-	VRD463KPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4640X	-	VRD4640PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4640X	-	VRD4640PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4641X	-	VRD4641PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4641X	-	VRD4641PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4642X	-	VRD4642PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4642X	-	VRD4642PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4643X	-	VRD4643PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4643X	-	VRD4643PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4644X	-	VRD4644PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4644X	-	VRD4644PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4645X	-	VRD4645PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4645X	-	VRD4645PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4646X	-	VRD4646PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4646X	-	VRD4646PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4647X	-	VRD4647PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4647X	-	VRD4647PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4648X	-	VRD4648PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4648X	-	VRD4648PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4649X	-	VRD4649PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4649X	-	VRD4649PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D464AX	-	VRD464APNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D464AX	-	VRD464APTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D464BX	-	VRD464BPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D464BX	-	VRD464BPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D464CX	-	VRD464CPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D464CX	-	VRD464CPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D464DX	-	VRD464DPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D464DX	-	VRD464DPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D464EX	-	VRD464EPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D464EX	-	VRD464EPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D464FX	-	VRD464FPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D464FX	-	VRD464FPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D464GX	-	VRD464GPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D464GX	-	VRD464GPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D464HX	-	VRD464HPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D464HX	-	VRD464HPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D464JX	-	VRD464JPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D464JX	-	VRD464JPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D464KX	-	VRD464KPNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D464KX	-	VRD464KPTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4650X	-	VRD4650PNX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4650X	-	VRD4650PTX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D46A	-	R1171S461A	LVR-IC	LDO, 4.6V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D46B	-	R1171S461B	LVR-IC	LDO, 4.6V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D4708X	-	VRD4708NNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4708X	-	VRD4708NTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4709X	-	VRD4709NNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4709X	-	VRD4709NTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D470JX	-	VRD470JNNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D470JX	-	VRD470JNTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D470KX	-	VRD470KNNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D470KX	-	VRD470KNTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4710X	-	VRD4710NNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4710X	-	VRD4710NTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4711X	-	VRD4711NNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4711X	-	VRD4711NTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4712X	-	VRD4712NNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4712X	-	VRD4712NTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4713X	-	VRD4713NNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4713X	-	VRD4713NTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4714X	-	VRD4714NNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4714X	-	VRD4714NTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4715X	-	VRD4715NNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4715X	-	VRD4715NTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4716X	-	VRD4716NNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4716X	-	VRD4716NTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4717X	-	VRD4717NNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4717X	-	VRD4717NTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4718X	-	VRD4718NNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4718X	-	VRD4718NTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4719X	-	VRD4719NNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4719X	-	VRD4719NTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D471AX	-	VRD471ANNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D471AX	-	VRD471ANTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D471BX	-	VRD471BNNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D471BX	-	VRD471BNTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D471CX	-	VRD471CNNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D471CX	-	VRD471CNTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D471DX	-	VRD471DNNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D471DX	-	VRD471DNTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D471EX	-	VRD471ENNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D471EX	-	VRD471ENTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D471FX	-	VRD471FNNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D471FX	-	VRD471FNTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D471GX	-	VRD471GNNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D471GX	-	VRD471GNTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D471HX	-	VRD471HNNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D471HX	-	VRD471HNTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D471JX	-	VRD471JNNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D471JX	-	VRD471JNTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D471KX	-	VRD471KPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D471KX	-	VRD471KPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4720X	-	VRD4720PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4720X	-	VRD4720PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4721X	-	VRD4721PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4721X	-	VRD4721PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4722X	-	VRD4722PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4722X	-	VRD4722PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4723X	-	VRD4723PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4723X	-	VRD4723PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4724X	-	VRD4724PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4724X	-	VRD4724PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4725X	-	VRD4725PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4725X	-	VRD4725PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4726X	-	VRD4726PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4726X	-	VRD4726PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4727X	-	VRD4727PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4727X	-	VRD4727PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4728X	-	VRD4728PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4728X	-	VRD4728PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4729X	-	VRD4729PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4729X	-	VRD4729PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D472AX	-	VRD472APNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D472AX	-	VRD472APTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D472BX	-	VRD472BPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D472BX	-	VRD472BPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D472CX	-	VRD472CPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D472CX	-	VRD472CPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D472DX	-	VRD472DPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D472DX	-	VRD472DPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D472EX	-	VRD472EPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D472EX	-	VRD472EPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D472FX	-	VRD472FPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D472FX	-	VRD472FPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D472GX	-	VRD472GPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D472GX	-	VRD472GPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D472HX	-	VRD472HPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D472HX	-	VRD472HPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D472JX	-	VRD472JPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D472JX	-	VRD472JPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D472KX	-	VRD472KPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D472KX	-	VRD472KPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4730X	-	VRD4730PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4730X	-	VRD4730PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4731X	-	VRD4731PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4731X	-	VRD4731PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4732X	-	VRD4732PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4732X	-	VRD4732PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4733X	-	VRD4733PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4733X	-	VRD4733PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4734X	-	VRD4734PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4734X	-	VRD4734PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4735X	-	VRD4735PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4735X	-	VRD4735PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4736X	-	VRD4736PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4736X	-	VRD4736PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4737X	-	VRD4737PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4737X	-	VRD4737PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4738X	-	VRD4738PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4738X	-	VRD4738PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4739X	-	VRD4739PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4739X	-	VRD4739PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D473AX	-	VRD473APNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D473AX	-	VRD473APTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D473BX	-	VRD473BPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D473BX	-	VRD473BPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D473CX	-	VRD473CPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D473CX	-	VRD473CPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D473DX	-	VRD473DPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D473DX	-	VRD473DPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D473EX	-	VRD473EPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D473EX	-	VRD473EPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D473FX	-	VRD473FPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D473FX	-	VRD473FPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D473GX	-	VRD473GPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D473GX	-	VRD473GPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D473HX	-	VRD473HPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D473HX	-	VRD473HPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D473JX	-	VRD473JPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D473JX	-	VRD473JPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D473KX	-	VRD473KPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D473KX	-	VRD473KPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4740X	-	VRD4740PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4740X	-	VRD4740PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4741X	-	VRD4741PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4741X	-	VRD4741PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4742X	-	VRD4742PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4742X	-	VRD4742PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4743X	-	VRD4743PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4743X	-	VRD4743PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4744X	-	VRD4744PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4744X	-	VRD4744PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4745X	-	VRD4745PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4745X	-	VRD4745PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4746X	-	VRD4746PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4746X	-	VRD4746PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4747X	-	VRD4747PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4747X	-	VRD4747PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4748X	-	VRD4748PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4748X	-	VRD4748PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4749X	-	VRD4749PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4749X	-	VRD4749PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D474AX	-	VRD474APNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D474AX	-	VRD474APTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D474BX	-	VRD474BPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D474BX	-	VRD474BPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D474CX	-	VRD474CPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D474CX	-	VRD474CPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D474DX	-	VRD474DPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D474DX	-	VRD474DPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D474EX	-	VRD474EPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D474EX	-	VRD474EPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D474FX	-	VRD474FPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D474FX	-	VRD474FPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D474GX	-	VRD474GPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D474GX	-	VRD474GPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D474HX	-	VRD474HPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D474HX	-	VRD474HPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D474JX	-	VRD474JPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D474JX	-	VRD474JPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D474KX	-	VRD474KPNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D474KX	-	VRD474KPTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4750X	-	VRD4750PNX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4750X	-	VRD4750PTX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D47A	-	R1171S471A	LVR-IC	LDO, 4.7V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D47B	-	R1171S471B	LVR-IC	LDO, 4.7V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D4808X	-	VRD4808NNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4808X	-	VRD4808NTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4809X	-	VRD4809NNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4809X	-	VRD4809NTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D480JX	-	VRD480JNNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D480JX	-	VRD480JNTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D480KX	-	VRD480KNNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D480KX	-	VRD480KNTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4810X	-	VRD4810NNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4810X	-	VRD4810NTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4811X	-	VRD4811NNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4811X	-	VRD4811NTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4812X	-	VRD4812NNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4812X	-	VRD4812NTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4813X	-	VRD4813NNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4813X	-	VRD4813NTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4814X	-	VRD4814NNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4814X	-	VRD4814NTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4815X	-	VRD4815NNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4815X	-	VRD4815NTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4816X	-	VRD4816NNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4816X	-	VRD4816NTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4817X	-	VRD4817NNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4817X	-	VRD4817NTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4818X	-	VRD4818NNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4818X	-	VRD4818NTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4819X	-	VRD4819NNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4819X	-	VRD4819NTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D481AX	-	VRD481ANNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D481AX	-	VRD481ANTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D481BX	-	VRD481BNNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D481BX	-	VRD481BNTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D481CX	-	VRD481CNNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D481CX	-	VRD481CNTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D481DX	-	VRD481DNNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D481DX	-	VRD481DNTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D481EX	-	VRD481ENNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D481EX	-	VRD481ENTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D481FX	-	VRD481FNNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D481FX	-	VRD481FNTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D481GX	-	VRD481GNNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D481GX	-	VRD481GNTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D481HX	-	VRD481HNNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D481HX	-	VRD481HNTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D481JX	-	VRD481JNNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D481JX	-	VRD481JNTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D481KX	-	VRD481KPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D481KX	-	VRD481KPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4820X	-	VRD4820PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4820X	-	VRD4820PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4821X	-	VRD4821PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4821X	-	VRD4821PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4822X	-	VRD4822PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4822X	-	VRD4822PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4823X	-	VRD4823PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4823X	-	VRD4823PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4824X	-	VRD4824PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4824X	-	VRD4824PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4825X	-	VRD4825PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4825X	-	VRD4825PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4826X	-	VRD4826PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4826X	-	VRD4826PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4827X	-	VRD4827PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4827X	-	VRD4827PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4828X	-	VRD4828PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4828X	-	VRD4828PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4829X	-	VRD4829PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4829X	-	VRD4829PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D482AX	-	VRD482APNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D482AX	-	VRD482APTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D482BX	-	VRD482BPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D482BX	-	VRD482BPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D482CX	-	VRD482CPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D482CX	-	VRD482CPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D482DX	-	VRD482DPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D482DX	-	VRD482DPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D482EX	-	VRD482EPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D482EX	-	VRD482EPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D482FX	-	VRD482FPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D482FX	-	VRD482FPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D482GX	-	VRD482GPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D482GX	-	VRD482GPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D482HX	-	VRD482HPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D482HX	-	VRD482HPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D482JX	-	VRD482JPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D482JX	-	VRD482JPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D482KX	-	VRD482KPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D482KX	-	VRD482KPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4830X	-	VRD4830PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4830X	-	VRD4830PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4831X	-	VRD4831PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4831X	-	VRD4831PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4832X	-	VRD4832PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4832X	-	VRD4832PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4833X	-	VRD4833PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4833X	-	VRD4833PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4834X	-	VRD4834PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4834X	-	VRD4834PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4835X	-	VRD4835PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4835X	-	VRD4835PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4836X	-	VRD4836PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4836X	-	VRD4836PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4837X	-	VRD4837PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4837X	-	VRD4837PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4838X	-	VRD4838PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4838X	-	VRD4838PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4839X	-	VRD4839PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4839X	-	VRD4839PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D483AX	-	VRD483APNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D483AX	-	VRD483APTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D483BX	-	VRD483BPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D483BX	-	VRD483BPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D483CX	-	VRD483CPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D483CX	-	VRD483CPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D483DX	-	VRD483DPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D483DX	-	VRD483DPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D483EX	-	VRD483EPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D483EX	-	VRD483EPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D483FX	-	VRD483FPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D483FX	-	VRD483FPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D483GX	-	VRD483GPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D483GX	-	VRD483GPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D483HX	-	VRD483HPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D483HX	-	VRD483HPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D483JX	-	VRD483JPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D483JX	-	VRD483JPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D483KX	-	VRD483KPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D483KX	-	VRD483KPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4840X	-	VRD4840PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4840X	-	VRD4840PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4841X	-	VRD4841PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4841X	-	VRD4841PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4842X	-	VRD4842PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4842X	-	VRD4842PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4843X	-	VRD4843PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4843X	-	VRD4843PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4844X	-	VRD4844PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4844X	-	VRD4844PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4845X	-	VRD4845PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4845X	-	VRD4845PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4846X	-	VRD4846PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4846X	-	VRD4846PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4847X	-	VRD4847PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4847X	-	VRD4847PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4848X	-	VRD4848PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4848X	-	VRD4848PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4849X	-	VRD4849PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4849X	-	VRD4849PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D484AX	-	VRD484APNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D484AX	-	VRD484APTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D484BX	-	VRD484BPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D484BX	-	VRD484BPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D484CX	-	VRD484CPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D484CX	-	VRD484CPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D484DX	-	VRD484DPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D484DX	-	VRD484DPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D484EX	-	VRD484EPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D484EX	-	VRD484EPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D484FX	-	VRD484FPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D484FX	-	VRD484FPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D484GX	-	VRD484GPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D484GX	-	VRD484GPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D484HX	-	VRD484HPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D484HX	-	VRD484HPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D484JX	-	VRD484JPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D484JX	-	VRD484JPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D484KX	-	VRD484KPNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D484KX	-	VRD484KPTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4850X	-	VRD4850PNX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4850X	-	VRD4850PTX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D48A	-	R1171S481A	LVR-IC	LDO, 4.8V±2%, 1.5A	HSOP-6J	vrk	VR4	7h	Ric
D48B	-	R1171S481B	LVR-IC	LDO, 4.8V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D4908X	-	VRD4908NNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4908X	-	VRD4908NTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4909X	-	VRD4909NNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4909X	-	VRD4909NTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D490JX	-	VRD490JNNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D490JX	-	VRD490JNTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D490KX	-	VRD490KNNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D490KX	-	VRD490KNTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4910X	-	VRD4910NNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4910X	-	VRD4910NTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4911X	-	VRD4911NNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4911X	-	VRD4911NTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4912X	-	VRD4912NNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4912X	-	VRD4912NTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4913X	-	VRD4913NNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4913X	-	VRD4913NTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4914X	-	VRD4914NNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4914X	-	VRD4914NTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4915X	-	VRD4915NNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4915X	-	VRD4915NTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4916X	-	VRD4916NNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4916X	-	VRD4916NTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4917X	-	VRD4917NNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4917X	-	VRD4917NTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4918X	-	VRD4918NNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4918X	-	VRD4918NTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4919X	-	VRD4919NNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4919X	-	VRD4919NTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D491AX	-	VRD491ANNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D491AX	-	VRD491ANTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D491BX	-	VRD491BNNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D491BX	-	VRD491BNTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D491CX	-	VRD491CNNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D491CX	-	VRD491CNTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D491DX	-	VRD491DNNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D491DX	-	VRD491DNTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D491EX	-	VRD491ENNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D491EX	-	VRD491ENTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D491FX	-	VRD491FNNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D491FX	-	VRD491FNTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D491GX	-	VRD491GNNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D491GX	-	VRD491GNTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D491HX	-	VRD491HNNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D491HX	-	VRD491HNTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D491JX	-	VRD491JNNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D491JX	-	VRD491JNTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D491KX	-	VRD491KPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D491KX	-	VRD491KPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4920X	-	VRD4920PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4920X	-	VRD4920PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4921X	-	VRD4921PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4921X	-	VRD4921PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4922X	-	VRD4922PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4922X	-	VRD4922PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4923X	-	VRD4923PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4923X	-	VRD4923PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4924X	-	VRD4924PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4924X	-	VRD4924PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4925X	-	VRD4925PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4925X	-	VRD4925PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4926X	-	VRD4926PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4926X	-	VRD4926PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4927X	-	VRD4927PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4927X	-	VRD4927PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4928X	-	VRD4928PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4928X	-	VRD4928PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4929X	-	VRD4929PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4929X	-	VRD4929PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D492AX	-	VRD492APNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D492AX	-	VRD492APTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D492BX	-	VRD492BPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D492BX	-	VRD492BPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D492CX	-	VRD492CPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D492CX	-	VRD492CPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D492DX	-	VRD492DPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D492DX	-	VRD492DPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D492EX	-	VRD492EPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D492EX	-	VRD492EPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D492FX	-	VRD492FPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D492FX	-	VRD492FPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D492GX	-	VRD492GPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D492GX	-	VRD492GPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D492HX	-	VRD492HPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D492HX	-	VRD492HPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D492JX	-	VRD492JPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D492JX	-	VRD492JPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D492KX	-	VRD492KPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D492KX	-	VRD492KPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4930X	-	VRD4930PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4930X	-	VRD4930PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4931X	-	VRD4931PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4931X	-	VRD4931PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4932X	-	VRD4932PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4932X	-	VRD4932PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4933X	-	VRD4933PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4933X	-	VRD4933PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4934X	-	VRD4934PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4934X	-	VRD4934PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4935X	-	VRD4935PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4935X	-	VRD4935PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4936X	-	VRD4936PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4936X	-	VRD4936PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4937X	-	VRD4937PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4937X	-	VRD4937PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4938X	-	VRD4938PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4938X	-	VRD4938PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4939X	-	VRD4939PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4939X	-	VRD4939PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D493AX	-	VRD493APNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D493AX	-	VRD493APTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D493BX	-	VRD493BPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D493BX	-	VRD493BPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D493CX	-	VRD493CPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D493CX	-	VRD493CPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D493DX	-	VRD493DPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D493DX	-	VRD493DPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D493EX	-	VRD493EPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D493EX	-	VRD493EPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D493FX	-	VRD493FPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D493FX	-	VRD493FPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D493GX	-	VRD493GPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D493GX	-	VRD493GPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D493HX	-	VRD493HPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D493HX	-	VRD493HPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D493JX	-	VRD493JPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D493JX	-	VRD493JPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D493KX	-	VRD493KPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D493KX	-	VRD493KPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4940X	-	VRD4940PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4940X	-	VRD4940PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4941X	-	VRD4941PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4941X	-	VRD4941PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4942X	-	VRD4942PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4942X	-	VRD4942PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4943X	-	VRD4943PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4943X	-	VRD4943PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4944X	-	VRD4944PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4944X	-	VRD4944PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4945X	-	VRD4945PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4945X	-	VRD4945PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4946X	-	VRD4946PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4946X	-	VRD4946PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4947X	-	VRD4947PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4947X	-	VRD4947PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4948X	-	VRD4948PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4948X	-	VRD4948PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4949X	-	VRD4949PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4949X	-	VRD4949PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D494AX	-	VRD494APNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D494AX	-	VRD494APTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D494BX	-	VRD494BPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D494BX	-	VRD494BPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D494CX	-	VRD494CPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D494CX	-	VRD494CPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D494DX	-	VRD494DPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D494DX	-	VRD494DPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D494EX	-	VRD494EPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D494EX	-	VRD494EPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D494FX	-	VRD494FPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D494FX	-	VRD494FPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D494GX	-	VRD494GPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D494GX	-	VRD494GPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D494HX	-	VRD494HPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D494HX	-	VRD494HPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D494JX	-	VRD494JPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D494JX	-	VRD494JPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D494KX	-	VRD494KPNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D494KX	-	VRD494KPTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4950X	-	VRD4950PNX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4950X	-	VRD4950PTX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D49A	-	R1171S491A	LVR-IC	LDO, 4.9V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D49B	-	R1171S491B	LVR-IC	LDO, 4.9V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D4A08X	-	VRD4A08NNX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A08X	-	VRD4A08NTX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A09X	-	VRD4A09NNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A09X	-	VRD4A09NTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A0JX	-	VRD4A0JNNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A0JX	-	VRD4A0JNTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A0KX	-	VRD4A0KNNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A0KX	-	VRD4A0KNTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A10X	-	VRD4A10NNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A10X	-	VRD4A10NTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A11X	-	VRD4A11NNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A11X	-	VRD4A11NTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A12X	-	VRD4A12NNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A12X	-	VRD4A12NTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A13X	-	VRD4A13NNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A13X	-	VRD4A13NTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A14X	-	VRD4A14NNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A14X	-	VRD4A14NTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A15X	-	VRD4A15NNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A15X	-	VRD4A15NTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A16X	-	VRD4A16NNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A16X	-	VRD4A16NTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A17X	-	VRD4A17NNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A17X	-	VRD4A17NTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A18X	-	VRD4A18NNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A18X	-	VRD4A18NTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A19X	-	VRD4A19NNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4A19X	-	VRD4A19NTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A1AX	-	VRD4A1ANNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A1AX	-	VRD4A1ANTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A1BX	-	VRD4A1BNNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A1BX	-	VRD4A1BNTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A1CX	-	VRD4A1CNNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A1CX	-	VRD4A1CNTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A1DX	-	VRD4A1DNNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A1DX	-	VRD4A1DNTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A1EX	-	VRD4A1ENNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A1EX	-	VRD4A1ENTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A1FX	-	VRD4A1FNNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A1FX	-	VRD4A1FNTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A1GX	-	VRD4A1GNNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A1GX	-	VRD4A1GNTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A1HX	-	VRD4A1HNNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A1HX	-	VRD4A1HNTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A1JX	-	VRD4A1JNNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A1JX	-	VRD4A1JNTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A1KX	-	VRD4A1KPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A1KX	-	VRD4A1KPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A20X	-	VRD4A20PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A20X	-	VRD4A20PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A21X	-	VRD4A21PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A21X	-	VRD4A21PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A22X	-	VRD4A22PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A22X	-	VRD4A22PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A23X	-	VRD4A23PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A23X	-	VRD4A23PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A24X	-	VRD4A24PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A24X	-	VRD4A24PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A25X	-	VRD4A25PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A25X	-	VRD4A25PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A26X	-	VRD4A26PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A26X	-	VRD4A26PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A27X	-	VRD4A27PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A27X	-	VRD4A27PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A28X	-	VRD4A28PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A28X	-	VRD4A28PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A29X	-	VRD4A29PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A29X	-	VRD4A29PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A2AX	-	VRD4A2APNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A2AX	-	VRD4A2APTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A2BX	-	VRD4A2BPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A2BX	-	VRD4A2BPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A2CX	-	VRD4A2CPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A2CX	-	VRD4A2CPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A2DX	-	VRD4A2DPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A2DX	-	VRD4A2DPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A2EX	-	VRD4A2EPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A2EX	-	VRD4A2EPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A2FX	-	VRD4A2FPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A2FX	-	VRD4A2FPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A2GX	-	VRD4A2GPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A2GX	-	VRD4A2GPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A2HX	-	VRD4A2HPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A2HX	-	VRD4A2HPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A2JX	-	VRD4A2JPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A2JX	-	VRD4A2JPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A2KX	-	VRD4A2KPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A2KX	-	VRD4A2KPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A30X	-	VRD4A30PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A30X	-	VRD4A30PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A31X	-	VRD4A31PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A31X	-	VRD4A31PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A32X	-	VRD4A32PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A32X	-	VRD4A32PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A33X	-	VRD4A33PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A33X	-	VRD4A33PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A34X	-	VRD4A34PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4A34X	-	VRD4A34PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A35X	-	VRD4A35PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A35X	-	VRD4A35PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A36X	-	VRD4A36PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A36X	-	VRD4A36PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A37X	-	VRD4A37PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A37X	-	VRD4A37PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A38X	-	VRD4A38PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A38X	-	VRD4A38PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A39X	-	VRD4A39PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A39X	-	VRD4A39PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A3AX	-	VRD4A3APNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A3AX	-	VRD4A3APTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A3BX	-	VRD4A3BPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A3BX	-	VRD4A3BPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A3CX	-	VRD4A3CPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A3CX	-	VRD4A3CPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A3DX	-	VRD4A3DPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A3DX	-	VRD4A3DPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A3EX	-	VRD4A3EPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A3EX	-	VRD4A3EPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A3FX	-	VRD4A3FPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A3FX	-	VRD4A3FPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A3GX	-	VRD4A3GPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A3GX	-	VRD4A3GPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A3HX	-	VRD4A3HPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A3HX	-	VRD4A3HPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A3JX	-	VRD4A3JPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A3JX	-	VRD4A3JPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A3KX	-	VRD4A3KPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A3KX	-	VRD4A3KPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A40X	-	VRD4A40PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A40X	-	VRD4A40PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A41X	-	VRD4A41PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A41X	-	VRD4A41PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A42X	-	VRD4A42PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A42X	-	VRD4A42PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A43X	-	VRD4A43PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A43X	-	VRD4A43PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A44X	-	VRD4A44PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A44X	-	VRD4A44PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A45X	-	VRD4A45PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A45X	-	VRD4A45PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A46X	-	VRD4A46PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A46X	-	VRD4A46PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A47X	-	VRD4A47PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A47X	-	VRD4A47PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A48X	-	VRD4A48PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A48X	-	VRD4A48PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A49X	-	VRD4A49PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A49X	-	VRD4A49PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A4AX	-	VRD4A4APNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A4AX	-	VRD4A4APTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A4BX	-	VRD4A4BPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A4BX	-	VRD4A4BPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A4CX	-	VRD4A4CPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A4CX	-	VRD4A4CPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A4DX	-	VRD4A4DPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A4DX	-	VRD4A4DPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A4EX	-	VRD4A4EPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A4EX	-	VRD4A4EPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A4FX	-	VRD4A4FPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A4FX	-	VRD4A4FPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A4GX	-	VRD4A4GPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A4GX	-	VRD4A4GPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A4HX	-	VRD4A4HPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A4HX	-	VRD4A4HPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A4JX	-	VRD4A4JPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A4JX	-	VRD4A4JPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A4KX	-	VRD4A4KPNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4A4KX	-	VRD4A4KPTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4A50X	-	VRD4A50PNX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4A50X	-	VRD4A50PTX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B08X	-	VRD4B08NNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B08X	-	VRD4B08NTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B09X	-	VRD4B09NNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B09X	-	VRD4B09NTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B0JX	-	VRD4B0JNNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B0JX	-	VRD4B0JNTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B0KX	-	VRD4B0KNNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B0KX	-	VRD4B0KNTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B10X	-	VRD4B10NNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B10X	-	VRD4B10NTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B11X	-	VRD4B11NNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B11X	-	VRD4B11NTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B12X	-	VRD4B12NNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B12X	-	VRD4B12NTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B13X	-	VRD4B13NNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B13X	-	VRD4B13NTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B14X	-	VRD4B14NNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B14X	-	VRD4B14NTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B15X	-	VRD4B15NNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B15X	-	VRD4B15NTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B16X	-	VRD4B16NNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B16X	-	VRD4B16NTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B17X	-	VRD4B17NNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B17X	-	VRD4B17NTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B18X	-	VRD4B18NNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B18X	-	VRD4B18NTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B19X	-	VRD4B19NNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B19X	-	VRD4B19NTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B1AX	-	VRD4B1ANNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B1AX	-	VRD4B1ANTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B1BX	-	VRD4B1BNNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B1BX	-	VRD4B1BNTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B1CX	-	VRD4B1CNNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B1CX	-	VRD4B1CNTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B1DX	-	VRD4B1DNNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B1DX	-	VRD4B1DNTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B1EX	-	VRD4B1ENNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B1EX	-	VRD4B1ENTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B1FX	-	VRD4B1FNNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B1FX	-	VRD4B1FNTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B1GX	-	VRD4B1GNNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B1GX	-	VRD4B1GNTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B1HX	-	VRD4B1HNNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B1HX	-	VRD4B1HNTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B1JX	-	VRD4B1JNNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B1JX	-	VRD4B1JNTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B1KX	-	VRD4B1KPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B1KX	-	VRD4B1KPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B20X	-	VRD4B20PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B20X	-	VRD4B20PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B21X	-	VRD4B21PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B21X	-	VRD4B21PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B22X	-	VRD4B22PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B22X	-	VRD4B22PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B23X	-	VRD4B23PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B23X	-	VRD4B23PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B24X	-	VRD4B24PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B24X	-	VRD4B24PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B25X	-	VRD4B25PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B25X	-	VRD4B25PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B26X	-	VRD4B26PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B26X	-	VRD4B26PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B27X	-	VRD4B27PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B27X	-	VRD4B27PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B28X	-	VRD4B28PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B28X	-	VRD4B28PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B29X	-	VRD4B29PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4B29X	-	VRD4B29PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B2AX	-	VRD4B2APNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B2AX	-	VRD4B2APTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B2BX	-	VRD4B2BPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B2BX	-	VRD4B2BPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B2CX	-	VRD4B2CPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B2CX	-	VRD4B2CPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B2DX	-	VRD4B2DPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B2DX	-	VRD4B2DPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B2EX	-	VRD4B2EPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B2EX	-	VRD4B2EPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B2FX	-	VRD4B2FPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B2FX	-	VRD4B2FPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B2GX	-	VRD4B2GPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B2GX	-	VRD4B2GPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B2HX	-	VRD4B2HPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B2HX	-	VRD4B2HPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B2JX	-	VRD4B2JPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B2JX	-	VRD4B2JPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B2KX	-	VRD4B2KPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B2KX	-	VRD4B2KPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B30X	-	VRD4B30PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B30X	-	VRD4B30PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B31X	-	VRD4B31PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B31X	-	VRD4B31PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B32X	-	VRD4B32PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B32X	-	VRD4B32PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B33X	-	VRD4B33PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B33X	-	VRD4B33PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B34X	-	VRD4B34PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B34X	-	VRD4B34PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B35X	-	VRD4B35PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B35X	-	VRD4B35PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B36X	-	VRD4B36PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B36X	-	VRD4B36PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B37X	-	VRD4B37PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B37X	-	VRD4B37PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B38X	-	VRD4B38PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B38X	-	VRD4B38PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B39X	-	VRD4B39PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B39X	-	VRD4B39PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B3AX	-	VRD4B3APNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B3AX	-	VRD4B3APTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B3BX	-	VRD4B3BPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B3BX	-	VRD4B3BPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B3CX	-	VRD4B3CPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B3CX	-	VRD4B3CPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B3DX	-	VRD4B3DPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B3DX	-	VRD4B3DPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B3EX	-	VRD4B3EPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B3EX	-	VRD4B3EPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B3FX	-	VRD4B3FPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B3FX	-	VRD4B3FPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B3GX	-	VRD4B3GPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B3GX	-	VRD4B3GPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B3HX	-	VRD4B3HPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B3HX	-	VRD4B3HPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B3JX	-	VRD4B3JPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B3JX	-	VRD4B3JPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B3KX	-	VRD4B3KPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B3KX	-	VRD4B3KPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B40X	-	VRD4B40PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B40X	-	VRD4B40PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B41X	-	VRD4B41PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B41X	-	VRD4B41PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B42X	-	VRD4B42PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B42X	-	VRD4B42PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B43X	-	VRD4B43PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B43X	-	VRD4B43PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B44X	-	VRD4B44PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4B44X	-	VRD4B44PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B45X	-	VRD4B45PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B45X	-	VRD4B45PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B46X	-	VRD4B46PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B46X	-	VRD4B46PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B47X	-	VRD4B47PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B47X	-	VRD4B47PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B48X	-	VRD4B48PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B48X	-	VRD4B48PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B49X	-	VRD4B49PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B49X	-	VRD4B49PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B4AX	-	VRD4B4APNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B4AX	-	VRD4B4APTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B4BX	-	VRD4B4BPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B4BX	-	VRD4B4BPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B4CX	-	VRD4B4CPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B4CX	-	VRD4B4CPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B4DX	-	VRD4B4DPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B4DX	-	VRD4B4DPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B4EX	-	VRD4B4EPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B4EX	-	VRD4B4EPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B4FX	-	VRD4B4FPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B4FX	-	VRD4B4FPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B4GX	-	VRD4B4GPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B4GX	-	VRD4B4GPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B4HX	-	VRD4B4HPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B4HX	-	VRD4B4HPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B4JX	-	VRD4B4JPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B4JX	-	VRD4B4JPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B4KX	-	VRD4B4KPNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B4KX	-	VRD4B4KPTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4B50X	-	VRD4B50PNX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4B50X	-	VRD4B50PTX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C08X	-	VRD4C08NNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C08X	-	VRD4C08NTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C09X	-	VRD4C09NNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C09X	-	VRD4C09NTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C0JX	-	VRD4C0JNNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C0JX	-	VRD4C0JNTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C0KX	-	VRD4C0KNNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C0KX	-	VRD4C0KNTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C10X	-	VRD4C10NNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C10X	-	VRD4C10NTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C11X	-	VRD4C11NNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C11X	-	VRD4C11NTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C12X	-	VRD4C12NNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C12X	-	VRD4C12NTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C13X	-	VRD4C13NNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C13X	-	VRD4C13NTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C14X	-	VRD4C14NNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C14X	-	VRD4C14NTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C15X	-	VRD4C15NNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C15X	-	VRD4C15NTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C16X	-	VRD4C16NNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C16X	-	VRD4C16NTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C17X	-	VRD4C17NNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C17X	-	VRD4C17NTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C18X	-	VRD4C18NNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C18X	-	VRD4C18NTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C19X	-	VRD4C19NNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C19X	-	VRD4C19NTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C1AX	-	VRD4C1ANNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C1AX	-	VRD4C1ANTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C1BX	-	VRD4C1BNNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C1BX	-	VRD4C1BNTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C1CX	-	VRD4C1CNNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C1CX	-	VRD4C1CNTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C1DX	-	VRD4C1DNNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C1DX	-	VRD4C1DNTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C1EX	-	VRD4C1ENNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4C1EX	-	VRD4C1ENTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C1FX	-	VRD4C1FNNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C1FX	-	VRD4C1FNTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C1GX	-	VRD4C1GNNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C1GX	-	VRD4C1GNTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C1HX	-	VRD4C1HNNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C1HX	-	VRD4C1HNTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C1JX	-	VRD4C1JNNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C1JX	-	VRD4C1JNTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C1KX	-	VRD4C1KPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C1KX	-	VRD4C1KPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C20X	-	VRD4C20PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C20X	-	VRD4C20PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C21X	-	VRD4C21PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C21X	-	VRD4C21PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C22X	-	VRD4C22PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C22X	-	VRD4C22PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C23X	-	VRD4C23PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C23X	-	VRD4C23PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C24X	-	VRD4C24PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C24X	-	VRD4C24PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C25X	-	VRD4C25PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C25X	-	VRD4C25PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C26X	-	VRD4C26PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C26X	-	VRD4C26PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C27X	-	VRD4C27PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C27X	-	VRD4C27PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C28X	-	VRD4C28PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C28X	-	VRD4C28PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C29X	-	VRD4C29PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C29X	-	VRD4C29PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C2AX	-	VRD4C2APNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C2AX	-	VRD4C2APTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C2BX	-	VRD4C2BPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C2BX	-	VRD4C2BPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C2CX	-	VRD4C2CPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C2CX	-	VRD4C2CPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C2DX	-	VRD4C2DPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C2DX	-	VRD4C2DPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C2EX	-	VRD4C2EPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C2EX	-	VRD4C2EPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C2FX	-	VRD4C2FPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C2FX	-	VRD4C2FPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C2GX	-	VRD4C2GPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C2GX	-	VRD4C2GPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C2HX	-	VRD4C2HPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C2HX	-	VRD4C2HPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C2JX	-	VRD4C2JPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C2JX	-	VRD4C2JPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C2KX	-	VRD4C2KPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C2KX	-	VRD4C2KPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C30X	-	VRD4C30PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C30X	-	VRD4C30PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C31X	-	VRD4C31PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C31X	-	VRD4C31PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C32X	-	VRD4C32PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C32X	-	VRD4C32PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C33X	-	VRD4C33PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C33X	-	VRD4C33PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C34X	-	VRD4C34PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C34X	-	VRD4C34PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C35X	-	VRD4C35PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C35X	-	VRD4C35PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C36X	-	VRD4C36PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C36X	-	VRD4C36PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C37X	-	VRD4C37PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C37X	-	VRD4C37PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C38X	-	VRD4C38PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C38X	-	VRD4C38PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C39X	-	VRD4C39PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4C39X	-	VRD4C39PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C3AX	-	VRD4C3APNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C3AX	-	VRD4C3APTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C3BX	-	VRD4C3BPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C3BX	-	VRD4C3BPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C3CX	-	VRD4C3CPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C3CX	-	VRD4C3CPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C3DX	-	VRD4C3DPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C3DX	-	VRD4C3DPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C3EX	-	VRD4C3EPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C3EX	-	VRD4C3EPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C3FX	-	VRD4C3FPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C3FX	-	VRD4C3FPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C3GX	-	VRD4C3GPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C3GX	-	VRD4C3GPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C3HX	-	VRD4C3HPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C3HX	-	VRD4C3HPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C3JX	-	VRD4C3JPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C3JX	-	VRD4C3JPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C3KX	-	VRD4C3KPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C3KX	-	VRD4C3KPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C40X	-	VRD4C40PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C40X	-	VRD4C40PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C41X	-	VRD4C41PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C41X	-	VRD4C41PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C42X	-	VRD4C42PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C42X	-	VRD4C42PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C43X	-	VRD4C43PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C43X	-	VRD4C43PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C44X	-	VRD4C44PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C44X	-	VRD4C44PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C45X	-	VRD4C45PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C45X	-	VRD4C45PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C46X	-	VRD4C46PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C46X	-	VRD4C46PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C47X	-	VRD4C47PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C47X	-	VRD4C47PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C48X	-	VRD4C48PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C48X	-	VRD4C48PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C49X	-	VRD4C49PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C49X	-	VRD4C49PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C4AX	-	VRD4C4APNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C4AX	-	VRD4C4APTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C4BX	-	VRD4C4BPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C4BX	-	VRD4C4BPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C4CX	-	VRD4C4CPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C4CX	-	VRD4C4CPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C4DX	-	VRD4C4DPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C4DX	-	VRD4C4DPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C4EX	-	VRD4C4EPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C4EX	-	VRD4C4EPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C4FX	-	VRD4C4FPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C4FX	-	VRD4C4FPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C4GX	-	VRD4C4GPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C4GX	-	VRD4C4GPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C4HX	-	VRD4C4HPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C4HX	-	VRD4C4HPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C4JX	-	VRD4C4JPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C4JX	-	VRD4C4JPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C4KX	-	VRD4C4KPNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C4KX	-	VRD4C4KPTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4C50X	-	VRD4C50PNX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4C50X	-	VRD4C50PTX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D08X	-	VRD4D08NNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D08X	-	VRD4D08NTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D09X	-	VRD4D09NNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D09X	-	VRD4D09NTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D0JX	-	VRD4D0JNNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D0JX	-	VRD4D0JNTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D0KX	-	VRD4D0KNNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4D0KX	-	VRD4D0KNTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D10X	-	VRD4D10NNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D10X	-	VRD4D10NTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D11X	-	VRD4D11NNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D11X	-	VRD4D11NTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D12X	-	VRD4D12NNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D12X	-	VRD4D12NTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D13X	-	VRD4D13NNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D13X	-	VRD4D13NTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D14X	-	VRD4D14NNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D14X	-	VRD4D14NTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D16X	-	VRD4D16NNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D16X	-	VRD4D16NTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D17X	-	VRD4D17NNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D17X	-	VRD4D17NTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D18X	-	VRD4D18NNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D18X	-	VRD4D18NTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D19X	-	VRD4D19NNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D19X	-	VRD4D19NTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D1AX	-	VRD4D1ANNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D1AX	-	VRD4D1ANTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D1BX	-	VRD4D1BNNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D1BX	-	VRD4D1BNTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D1CX	-	VRD4D1CNNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D1CX	-	VRD4D1CNTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D1DX	-	VRD4D1DNNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D1DX	-	VRD4D1DNTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D1GX	-	VRD4D1GNNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D1GX	-	VRD4D1GNTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D1HX	-	VRD4D1HNNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D1HX	-	VRD4D1HNTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D1JX	-	VRD4D1JNNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D1JX	-	VRD4D1JNTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D1KX	-	VRD4D1KPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D1KX	-	VRD4D1KPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D20X	-	VRD4D20PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D20X	-	VRD4D20PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D21X	-	VRD4D21PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D21X	-	VRD4D21PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D22X	-	VRD4D22PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D22X	-	VRD4D22PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D23X	-	VRD4D23PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D23X	-	VRD4D23PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D24X	-	VRD4D24PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D24X	-	VRD4D24PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D25X	-	VRD4D25PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D25X	-	VRD4D25PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D26X	-	VRD4D26PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D26X	-	VRD4D26PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D27X	-	VRD4D27PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D27X	-	VRD4D27PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D28X	-	VRD4D28PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D28X	-	VRD4D28PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D29X	-	VRD4D29PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D29X	-	VRD4D29PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D2AX	-	VRD4D2APNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D2AX	-	VRD4D2APTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D2BX	-	VRD4D2BPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D2BX	-	VRD4D2BPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D2CX	-	VRD4D2CPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D2CX	-	VRD4D2CPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D2DX	-	VRD4D2DPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D2DX	-	VRD4D2DPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D2EX	-	VRD4D2EPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D2EX	-	VRD4D2EPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D2FX	-	VRD4D2FPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D2FX	-	VRD4D2FPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D2GX	-	VRD4D2GPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D2GX	-	VRD4D2GPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D2HX	-	VRD4D2HPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4D2HX	-	VRD4D2HPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D2JX	-	VRD4D2JPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D2JX	-	VRD4D2JPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D2KX	-	VRD4D2KPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D2KX	-	VRD4D2KPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D30X	-	VRD4D30PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D30X	-	VRD4D30PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D31X	-	VRD4D31PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D31X	-	VRD4D31PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D32X	-	VRD4D32PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D32X	-	VRD4D32PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D33X	-	VRD4D33PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D33X	-	VRD4D33PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D34X	-	VRD4D34PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D34X	-	VRD4D34PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D35X	-	VRD4D35PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D35X	-	VRD4D35PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D36X	-	VRD4D36PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D36X	-	VRD4D36PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D37X	-	VRD4D37PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D37X	-	VRD4D37PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D38X	-	VRD4D38PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D38X	-	VRD4D38PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D39X	-	VRD4D39PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D39X	-	VRD4D39PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D3AX	-	VRD4D3APNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D3AX	-	VRD4D3APTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D3BX	-	VRD4D3BPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D3BX	-	VRD4D3BPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D3CX	-	VRD4D3CPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D3CX	-	VRD4D3CPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D3DX	-	VRD4D3DPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D3DX	-	VRD4D3DPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D3EX	-	VRD4D3EPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D3EX	-	VRD4D3EPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D3FX	-	VRD4D3FPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D3FX	-	VRD4D3FPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D3GX	-	VRD4D3GPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D3GX	-	VRD4D3GPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D3HX	-	VRD4D3HPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D3HX	-	VRD4D3HPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D3JX	-	VRD4D3JPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D3JX	-	VRD4D3JPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D3KX	-	VRD4D3KPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D3KX	-	VRD4D3KPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D40X	-	VRD4D40PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D40X	-	VRD4D40PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D41X	-	VRD4D41PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D41X	-	VRD4D41PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D42X	-	VRD4D42PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D42X	-	VRD4D42PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D43X	-	VRD4D43PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D43X	-	VRD4D43PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D44X	-	VRD4D44PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D44X	-	VRD4D44PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D45X	-	VRD4D45PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D45X	-	VRD4D45PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D46X	-	VRD4D46PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D46X	-	VRD4D46PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D47X	-	VRD4D47PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D47X	-	VRD4D47PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D48X	-	VRD4D48PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D48X	-	VRD4D48PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D49X	-	VRD4D49PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D49X	-	VRD4D49PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D4AX	-	VRD4D4APNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D4AX	-	VRD4D4APTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D4BX	-	VRD4D4BPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D4BX	-	VRD4D4BPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D4CX	-	VRD4D4CPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4D4CX	-	VRD4D4CPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D4DX	-	VRD4D4DPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D4DX	-	VRD4D4DPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D4EX	-	VRD4D4EPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D4EX	-	VRD4D4EPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D4FX	-	VRD4D4FPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D4FX	-	VRD4D4FPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D4GX	-	VRD4D4GPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D4GX	-	VRD4D4GPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D4HX	-	VRD4D4HPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D4HX	-	VRD4D4HPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D4JX	-	VRD4D4JPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D4JX	-	VRD4D4JPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D4KX	-	VRD4D4KPNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D4KX	-	VRD4D4KPTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D50X	-	VRD4D50PNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D50X	-	VRD4D50PTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4D5X	-	VRD4D15NNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4D5X	-	VRD4D15NTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4DEX	-	VRD4D1ENNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4DEX	-	VRD4D1ENTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4DFX	-	VRD4D1FNNX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4DFX	-	VRD4D1FNTX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E08X	-	VRD4E08NNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E08X	-	VRD4E08NTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E09X	-	VRD4E09NNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E09X	-	VRD4E09NTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E0JX	-	VRD4E0JNNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E0JX	-	VRD4E0JNTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E0KX	-	VRD4E0KNNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E0KX	-	VRD4E0KNTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E10X	-	VRD4E10NNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E10X	-	VRD4E10NTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E11X	-	VRD4E11NNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E11X	-	VRD4E11NTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E12X	-	VRD4E12NNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E12X	-	VRD4E12NTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E13X	-	VRD4E13NNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E13X	-	VRD4E13NTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E14X	-	VRD4E14NNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E14X	-	VRD4E14NTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E15X	-	VRD4E15NNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E15X	-	VRD4E15NTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E16X	-	VRD4E16NNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E16X	-	VRD4E16NTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E17X	-	VRD4E17NNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E17X	-	VRD4E17NTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E18X	-	VRD4E18NNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E18X	-	VRD4E18NTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E19X	-	VRD4E19NNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E19X	-	VRD4E19NTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E1AX	-	VRD4E1ANNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E1AX	-	VRD4E1ANTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E1BX	-	VRD4E1BNNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E1BX	-	VRD4E1BNTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E1CX	-	VRD4E1CNNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E1CX	-	VRD4E1CNTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E1DX	-	VRD4E1DNNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E1DX	-	VRD4E1DNTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E1EX	-	VRD4E1ENNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E1EX	-	VRD4E1ENTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E1FX	-	VRD4E1FNNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E1FX	-	VRD4E1FNTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E1GX	-	VRD4E1GNNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E1GX	-	VRD4E1GNTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E1HX	-	VRD4E1HNNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E1HX	-	VRD4E1HNTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E1JX	-	VRD4E1JNNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E1JX	-	VRD4E1JNTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E1KX	-	VRD4E1KPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4E1KX	-	VRD4E1KPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E20X	-	VRD4E20PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E20X	-	VRD4E20PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E21X	-	VRD4E21PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E21X	-	VRD4E21PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E22X	-	VRD4E22PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E22X	-	VRD4E22PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E23X	-	VRD4E23PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E23X	-	VRD4E23PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E24X	-	VRD4E24PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E24X	-	VRD4E24PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E25X	-	VRD4E25PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E25X	-	VRD4E25PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E26X	-	VRD4E26PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E26X	-	VRD4E26PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E27X	-	VRD4E27PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E27X	-	VRD4E27PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E28X	-	VRD4E28PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E28X	-	VRD4E28PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E29X	-	VRD4E29PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E29X	-	VRD4E29PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E2AX	-	VRD4E2APNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E2AX	-	VRD4E2APTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E2BX	-	VRD4E2BPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E2BX	-	VRD4E2BPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E2CX	-	VRD4E2CPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E2CX	-	VRD4E2CPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E2DX	-	VRD4E2DPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E2DX	-	VRD4E2DPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E2EX	-	VRD4E2EPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E2EX	-	VRD4E2EPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E2FX	-	VRD4E2FPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E2FX	-	VRD4E2FPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E2GX	-	VRD4E2GPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E2GX	-	VRD4E2GPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E2HX	-	VRD4E2HPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E2HX	-	VRD4E2HPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E2JX	-	VRD4E2JPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E2JX	-	VRD4E2JPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E2KX	-	VRD4E2KPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E2KX	-	VRD4E2KPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E30X	-	VRD4E30PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E30X	-	VRD4E30PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E31X	-	VRD4E31PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E31X	-	VRD4E31PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E32X	-	VRD4E32PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E32X	-	VRD4E32PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E33X	-	VRD4E33PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E33X	-	VRD4E33PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E34X	-	VRD4E34PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E34X	-	VRD4E34PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E35X	-	VRD4E35PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E35X	-	VRD4E35PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E36X	-	VRD4E36PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E36X	-	VRD4E36PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E37X	-	VRD4E37PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E37X	-	VRD4E37PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E38X	-	VRD4E38PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E38X	-	VRD4E38PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E39X	-	VRD4E39PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E39X	-	VRD4E39PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E3AX	-	VRD4E3APNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E3AX	-	VRD4E3APTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E3BX	-	VRD4E3BPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E3BX	-	VRD4E3BPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E3CX	-	VRD4E3CPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E3CX	-	VRD4E3CPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E3DX	-	VRD4E3DPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E3DX	-	VRD4E3DPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E3EX	-	VRD4E3EPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4E3EX	-	VRD4E3EPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E3FX	-	VRD4E3FPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E3FX	-	VRD4E3FPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E3GX	-	VRD4E3GPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E3GX	-	VRD4E3GPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E3HX	-	VRD4E3HPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E3HX	-	VRD4E3HPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E3JX	-	VRD4E3JPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E3JX	-	VRD4E3JPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E3KX	-	VRD4E3KPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E3KX	-	VRD4E3KPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E40X	-	VRD4E40PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E40X	-	VRD4E40PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E41X	-	VRD4E41PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E41X	-	VRD4E41PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E42X	-	VRD4E42PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E42X	-	VRD4E42PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E43X	-	VRD4E43PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E43X	-	VRD4E43PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E44X	-	VRD4E44PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E44X	-	VRD4E44PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E45X	-	VRD4E45PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E45X	-	VRD4E45PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E46X	-	VRD4E46PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E46X	-	VRD4E46PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E47X	-	VRD4E47PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E47X	-	VRD4E47PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E48X	-	VRD4E48PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E48X	-	VRD4E48PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E49X	-	VRD4E49PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E49X	-	VRD4E49PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E4AX	-	VRD4E4APNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E4AX	-	VRD4E4APTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E4BX	-	VRD4E4BPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E4BX	-	VRD4E4BPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E4CX	-	VRD4E4CPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E4CX	-	VRD4E4CPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E4DX	-	VRD4E4DPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E4DX	-	VRD4E4DPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E4EX	-	VRD4E4EPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E4EX	-	VRD4E4EPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E4FX	-	VRD4E4FPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E4FX	-	VRD4E4FPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E4GX	-	VRD4E4GPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E4GX	-	VRD4E4GPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E4HX	-	VRD4E4HPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E4HX	-	VRD4E4HPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E4JX	-	VRD4E4JPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E4JX	-	VRD4E4JPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E4KX	-	VRD4E4KPNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E4KX	-	VRD4E4KPTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4E50X	-	VRD4E50PNX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4E50X	-	VRD4E50PTX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F08X	-	VRD4F08NNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F08X	-	VRD4F08NTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F09X	-	VRD4F09NNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F09X	-	VRD4F09NTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F0JX	-	VRD4F0JNNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F0JX	-	VRD4F0JNTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F0KX	-	VRD4F0KNNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F0KX	-	VRD4F0KNTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F10X	-	VRD4F10NNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F10X	-	VRD4F10NTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F11X	-	VRD4F11NNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F11X	-	VRD4F11NTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F12X	-	VRD4F12NNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F12X	-	VRD4F12NTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F13X	-	VRD4F13NNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F13X	-	VRD4F13NTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F14X	-	VRD4F14NNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4F14X	-	VRD4F14NTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F15X	-	VRD4F15NNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F15X	-	VRD4F15NTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F16X	-	VRD4F16NNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F16X	-	VRD4F16NTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F17X	-	VRD4F17NNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F17X	-	VRD4F17NTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F18X	-	VRD4F18NNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F18X	-	VRD4F18NTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F19X	-	VRD4F19NNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F19X	-	VRD4F19NTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F1AX	-	VRD4F1ANNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F1AX	-	VRD4F1ANTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F1BX	-	VRD4F1BNNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F1BX	-	VRD4F1BNTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F1CX	-	VRD4F1CNNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F1CX	-	VRD4F1CNTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F1DX	-	VRD4F1DNNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F1DX	-	VRD4F1DNTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F1EX	-	VRD4F1ENNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F1EX	-	VRD4F1ENTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F1FX	-	VRD4F1FNNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F1FX	-	VRD4F1FNTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F1GX	-	VRD4F1GNNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F1GX	-	VRD4F1GNTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F1HX	-	VRD4F1HNNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F1HX	-	VRD4F1HNTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F1JX	-	VRD4F1JNNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F1JX	-	VRD4F1JNTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F1KX	-	VRD4F1KPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F1KX	-	VRD4F1KPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F20X	-	VRD4F20PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F20X	-	VRD4F20PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F21X	-	VRD4F21PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F21X	-	VRD4F21PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F22X	-	VRD4F22PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F22X	-	VRD4F22PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F23X	-	VRD4F23PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F23X	-	VRD4F23PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F24X	-	VRD4F24PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F24X	-	VRD4F24PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F25X	-	VRD4F25PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F25X	-	VRD4F25PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F26X	-	VRD4F26PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F26X	-	VRD4F26PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F27X	-	VRD4F27PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F27X	-	VRD4F27PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F28X	-	VRD4F28PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F28X	-	VRD4F28PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F29X	-	VRD4F29PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F29X	-	VRD4F29PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F2AX	-	VRD4F2APNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F2AX	-	VRD4F2APTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F2BX	-	VRD4F2BPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F2BX	-	VRD4F2BPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F2CX	-	VRD4F2CPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F2CX	-	VRD4F2CPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F2DX	-	VRD4F2DPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F2DX	-	VRD4F2DPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F2EX	-	VRD4F2EPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F2EX	-	VRD4F2EPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F2FX	-	VRD4F2FPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F2FX	-	VRD4F2FPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F2GX	-	VRD4F2GPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F2GX	-	VRD4F2GPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F2HX	-	VRD4F2HPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F2HX	-	VRD4F2HPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F2JX	-	VRD4F2JPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F2JX	-	VRD4F2JPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F2KX	-	VRD4F2KPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4F2KX	-	VRD4F2KPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F30X	-	VRD4F30PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F30X	-	VRD4F30PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F31X	-	VRD4F31PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F31X	-	VRD4F31PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F32X	-	VRD4F32PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F32X	-	VRD4F32PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F33X	-	VRD4F33PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F33X	-	VRD4F33PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F34X	-	VRD4F34PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F34X	-	VRD4F34PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F35X	-	VRD4F35PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F35X	-	VRD4F35PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F36X	-	VRD4F36PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F36X	-	VRD4F36PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F37X	-	VRD4F37PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F37X	-	VRD4F37PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F38X	-	VRD4F38PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F38X	-	VRD4F38PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F39X	-	VRD4F39PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F39X	-	VRD4F39PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F3AX	-	VRD4F3APNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F3AX	-	VRD4F3APTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F3BX	-	VRD4F3BPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F3BX	-	VRD4F3BPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F3CX	-	VRD4F3CPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F3CX	-	VRD4F3CPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F3DX	-	VRD4F3DPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F3DX	-	VRD4F3DPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F3EX	-	VRD4F3EPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F3EX	-	VRD4F3EPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F3FX	-	VRD4F3FPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F3FX	-	VRD4F3FPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F3GX	-	VRD4F3GPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F3GX	-	VRD4F3GPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F3HX	-	VRD4F3HPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F3HX	-	VRD4F3HPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F3JX	-	VRD4F3JPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F3JX	-	VRD4F3JPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F3KX	-	VRD4F3KPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F3KX	-	VRD4F3KPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F40X	-	VRD4F40PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F40X	-	VRD4F40PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F41X	-	VRD4F41PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F41X	-	VRD4F41PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F42X	-	VRD4F42PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F42X	-	VRD4F42PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F43X	-	VRD4F43PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F43X	-	VRD4F43PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F44X	-	VRD4F44PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F44X	-	VRD4F44PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F45X	-	VRD4F45PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F45X	-	VRD4F45PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F46X	-	VRD4F46PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F46X	-	VRD4F46PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F47X	-	VRD4F47PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F47X	-	VRD4F47PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F48X	-	VRD4F48PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F48X	-	VRD4F48PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F49X	-	VRD4F49PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F49X	-	VRD4F49PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F4AX	-	VRD4F4APNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F4AX	-	VRD4F4APTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F4BX	-	VRD4F4BPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F4BX	-	VRD4F4BPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F4CX	-	VRD4F4CPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F4CX	-	VRD4F4CPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F4DX	-	VRD4F4DPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F4DX	-	VRD4F4DPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F4EX	-	VRD4F4EPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4F4EX	-	VRD4F4EPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F4FX	-	VRD4F4FPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F4FX	-	VRD4F4FPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F4GX	-	VRD4F4GPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F4GX	-	VRD4F4GPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F4HX	-	VRD4F4HPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F4HX	-	VRD4F4HPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F4JX	-	VRD4F4JPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F4JX	-	VRD4F4JPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F4KX	-	VRD4F4KPNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F4KX	-	VRD4F4KPTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4F50X	-	VRD4F50PNX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4F50X	-	VRD4F50PTX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G08X	-	VRD4G08NNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G08X	-	VRD4G08NTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G09X	-	VRD4G09NNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G09X	-	VRD4G09NTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G0JX	-	VRD4G0JNNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G0JX	-	VRD4G0JNTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G0KX	-	VRD4G0KNNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G0KX	-	VRD4G0KNTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G10X	-	VRD4G10NNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G10X	-	VRD4G10NTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G11X	-	VRD4G11NNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G11X	-	VRD4G11NTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G12X	-	VRD4G12NNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G12X	-	VRD4G12NTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G13X	-	VRD4G13NNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G13X	-	VRD4G13NTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G14X	-	VRD4G14NNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G14X	-	VRD4G14NTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G15X	-	VRD4G15NNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G15X	-	VRD4G15NTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G16X	-	VRD4G16NNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G16X	-	VRD4G16NTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G17X	-	VRD4G17NNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G17X	-	VRD4G17NTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G18X	-	VRD4G18NNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G18X	-	VRD4G18NTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G19X	-	VRD4G19NNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G19X	-	VRD4G19NTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G1AX	-	VRD4G1ANNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G1AX	-	VRD4G1ANTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G1BX	-	VRD4G1BNNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G1BX	-	VRD4G1BNTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G1CX	-	VRD4G1CNNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G1CX	-	VRD4G1CNTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G1DX	-	VRD4G1DNNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G1DX	-	VRD4G1DNTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G1EX	-	VRD4G1ENNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G1EX	-	VRD4G1ENTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G1FX	-	VRD4G1FNNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G1FX	-	VRD4G1FNTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G1GX	-	VRD4G1GNNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G1GX	-	VRD4G1GNTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G1HX	-	VRD4G1HNNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G1HX	-	VRD4G1HNTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G1JX	-	VRD4G1JNNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G1JX	-	VRD4G1JNTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G1KX	-	VRD4G1KPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G1KX	-	VRD4G1KPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G20X	-	VRD4G20PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G20X	-	VRD4G20PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G21X	-	VRD4G21PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G21X	-	VRD4G21PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G22X	-	VRD4G22PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G22X	-	VRD4G22PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G23X	-	VRD4G23PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G23X	-	VRD4G23PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G24X	-	VRD4G24PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4G24X	-	VRD4G24PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G25X	-	VRD4G25PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G25X	-	VRD4G25PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G26X	-	VRD4G26PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G26X	-	VRD4G26PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G27X	-	VRD4G27PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G27X	-	VRD4G27PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G28X	-	VRD4G28PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G28X	-	VRD4G28PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G29X	-	VRD4G29PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G29X	-	VRD4G29PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G2AX	-	VRD4G2APNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G2AX	-	VRD4G2APTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G2BX	-	VRD4G2BPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G2BX	-	VRD4G2BPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G2CX	-	VRD4G2CPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G2CX	-	VRD4G2CPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G2DX	-	VRD4G2DPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G2DX	-	VRD4G2DPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G2EX	-	VRD4G2EPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G2EX	-	VRD4G2EPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G2FX	-	VRD4G2FPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G2FX	-	VRD4G2FPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G2GX	-	VRD4G2GPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G2GX	-	VRD4G2GPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G2HX	-	VRD4G2HPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G2HX	-	VRD4G2HPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G2JX	-	VRD4G2JPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G2JX	-	VRD4G2JPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G2KX	-	VRD4G2KPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G2KX	-	VRD4G2KPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G30X	-	VRD4G30PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G30X	-	VRD4G30PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G31X	-	VRD4G31PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G31X	-	VRD4G31PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G32X	-	VRD4G32PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G32X	-	VRD4G32PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G33X	-	VRD4G33PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G33X	-	VRD4G33PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G34X	-	VRD4G34PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G34X	-	VRD4G34PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G35X	-	VRD4G35PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G35X	-	VRD4G35PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G36X	-	VRD4G36PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G36X	-	VRD4G36PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G37X	-	VRD4G37PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G37X	-	VRD4G37PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G38X	-	VRD4G38PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G38X	-	VRD4G38PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G39X	-	VRD4G39PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G39X	-	VRD4G39PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G3AX	-	VRD4G3APNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G3AX	-	VRD4G3APTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G3BX	-	VRD4G3BPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G3BX	-	VRD4G3BPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G3CX	-	VRD4G3CPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G3CX	-	VRD4G3CPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G3DX	-	VRD4G3DPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G3DX	-	VRD4G3DPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G3EX	-	VRD4G3EPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G3EX	-	VRD4G3EPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G3FX	-	VRD4G3FPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G3FX	-	VRD4G3FPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G3GX	-	VRD4G3GPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G3GX	-	VRD4G3GPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G3HX	-	VRD4G3HPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G3HX	-	VRD4G3HPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G3JX	-	VRD4G3JPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G3JX	-	VRD4G3JPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G3KX	-	VRD4G3KPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4G3KX	-	VRD4G3KPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G40X	-	VRD4G40PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G40X	-	VRD4G40PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G41X	-	VRD4G41PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G41X	-	VRD4G41PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G42X	-	VRD4G42PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G42X	-	VRD4G42PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G43X	-	VRD4G43PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G43X	-	VRD4G43PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G44X	-	VRD4G44PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G44X	-	VRD4G44PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G45X	-	VRD4G45PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G45X	-	VRD4G45PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G46X	-	VRD4G46PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G46X	-	VRD4G46PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G47X	-	VRD4G47PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G47X	-	VRD4G47PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G48X	-	VRD4G48PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G48X	-	VRD4G48PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G49X	-	VRD4G49PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G49X	-	VRD4G49PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G4AX	-	VRD4G4APNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G4AX	-	VRD4G4APTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G4BX	-	VRD4G4BPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G4BX	-	VRD4G4BPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G4CX	-	VRD4G4CPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G4CX	-	VRD4G4CPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G4DX	-	VRD4G4DPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G4DX	-	VRD4G4DPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G4EX	-	VRD4G4EPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G4EX	-	VRD4G4EPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G4FX	-	VRD4G4FPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G4FX	-	VRD4G4FPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G4GX	-	VRD4G4GPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G4GX	-	VRD4G4GPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G4HX	-	VRD4G4HPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G4HX	-	VRD4G4HPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G4JX	-	VRD4G4JPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G4JX	-	VRD4G4JPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G4KX	-	VRD4G4KPNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G4KX	-	VRD4G4KPTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4G50X	-	VRD4G50PNX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4G50X	-	VRD4G50PTX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H08X	-	VRD4H08NNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H08X	-	VRD4H08NTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H09X	-	VRD4H09NNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H09X	-	VRD4H09NTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H0JX	-	VRD4H0JNNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H0JX	-	VRD4H0JNTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H0KX	-	VRD4H0KNNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H0KX	-	VRD4H0KNTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H10X	-	VRD4H10NNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H10X	-	VRD4H10NTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H11X	-	VRD4H11NNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H11X	-	VRD4H11NTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H12X	-	VRD4H12NNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H12X	-	VRD4H12NTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H13X	-	VRD4H13NNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H13X	-	VRD4H13NTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H14X	-	VRD4H14NNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H14X	-	VRD4H14NTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H15X	-	VRD4H15NNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H15X	-	VRD4H15NTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H16X	-	VRD4H16NNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H16X	-	VRD4H16NTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H17X	-	VRD4H17NNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H17X	-	VRD4H17NTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H18X	-	VRD4H18NNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H18X	-	VRD4H18NTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H19X	-	VRD4H19NNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4H19X	-	VRD4H19NTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H1AX	-	VRD4H1ANNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H1AX	-	VRD4H1ANTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H1BX	-	VRD4H1BNNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H1BX	-	VRD4H1BNTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H1CX	-	VRD4H1CNNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H1CX	-	VRD4H1CNTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H1DX	-	VRD4H1DNNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H1DX	-	VRD4H1DNTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H1EX	-	VRD4H1ENNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H1EX	-	VRD4H1ENTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H1FX	-	VRD4H1FNNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H1FX	-	VRD4H1FNTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H1GX	-	VRD4H1GNNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H1GX	-	VRD4H1GNTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H1HX	-	VRD4H1HNNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H1HX	-	VRD4H1HNTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H1JX	-	VRD4H1JNNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H1JX	-	VRD4H1JNTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H1KX	-	VRD4H1KPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H1KX	-	VRD4H1KPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H20X	-	VRD4H20PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H20X	-	VRD4H20PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H21X	-	VRD4H21PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H21X	-	VRD4H21PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H22X	-	VRD4H22PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H22X	-	VRD4H22PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H23X	-	VRD4H23PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H23X	-	VRD4H23PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H24X	-	VRD4H24PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H24X	-	VRD4H24PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H25X	-	VRD4H25PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H25X	-	VRD4H25PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H26X	-	VRD4H26PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H26X	-	VRD4H26PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H27X	-	VRD4H27PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H27X	-	VRD4H27PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H28X	-	VRD4H28PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H28X	-	VRD4H28PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H29X	-	VRD4H29PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H29X	-	VRD4H29PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H2AX	-	VRD4H2APNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H2AX	-	VRD4H2APTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H2BX	-	VRD4H2BPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H2BX	-	VRD4H2BPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H2CX	-	VRD4H2CPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H2CX	-	VRD4H2CPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H2DX	-	VRD4H2DPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H2DX	-	VRD4H2DPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H2EX	-	VRD4H2EPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H2EX	-	VRD4H2EPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H2FX	-	VRD4H2FPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H2FX	-	VRD4H2FPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H2GX	-	VRD4H2GPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H2GX	-	VRD4H2GPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H2HX	-	VRD4H2HPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H2HX	-	VRD4H2HPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H2JX	-	VRD4H2JPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H2JX	-	VRD4H2JPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H2KX	-	VRD4H2KPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H2KX	-	VRD4H2KPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H30X	-	VRD4H30PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H30X	-	VRD4H30PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H31X	-	VRD4H31PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H31X	-	VRD4H31PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H32X	-	VRD4H32PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H32X	-	VRD4H32PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H33X	-	VRD4H33PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H33X	-	VRD4H33PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H34X	-	VRD4H34PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4H34X	-	VRD4H34PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H35X	-	VRD4H35PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H35X	-	VRD4H35PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H36X	-	VRD4H36PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H36X	-	VRD4H36PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H37X	-	VRD4H37PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H37X	-	VRD4H37PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H38X	-	VRD4H38PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H38X	-	VRD4H38PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H39X	-	VRD4H39PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H39X	-	VRD4H39PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H3AX	-	VRD4H3APNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H3AX	-	VRD4H3APTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H3BX	-	VRD4H3BPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H3BX	-	VRD4H3BPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H3CX	-	VRD4H3CPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H3CX	-	VRD4H3CPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H3DX	-	VRD4H3DPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H3DX	-	VRD4H3DPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H3EX	-	VRD4H3EPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H3EX	-	VRD4H3EPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H3FX	-	VRD4H3FPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H3FX	-	VRD4H3FPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H3GX	-	VRD4H3GPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H3GX	-	VRD4H3GPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H3HX	-	VRD4H3HPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H3HX	-	VRD4H3HPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H3JX	-	VRD4H3JPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H3JX	-	VRD4H3JPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H3KX	-	VRD4H3KPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H3KX	-	VRD4H3KPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H40X	-	VRD4H40PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H40X	-	VRD4H40PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H41X	-	VRD4H41PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H41X	-	VRD4H41PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H42X	-	VRD4H42PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H42X	-	VRD4H42PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H43X	-	VRD4H43PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H43X	-	VRD4H43PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H44X	-	VRD4H44PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H44X	-	VRD4H44PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H45X	-	VRD4H45PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H45X	-	VRD4H45PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H46X	-	VRD4H46PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H46X	-	VRD4H46PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H47X	-	VRD4H47PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H47X	-	VRD4H47PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H48X	-	VRD4H48PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H48X	-	VRD4H48PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H49X	-	VRD4H49PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H49X	-	VRD4H49PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H4AX	-	VRD4H4APNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H4AX	-	VRD4H4APTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H4BX	-	VRD4H4BPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H4BX	-	VRD4H4BPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H4CX	-	VRD4H4CPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H4CX	-	VRD4H4CPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H4DX	-	VRD4H4DPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H4DX	-	VRD4H4DPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H4EX	-	VRD4H4EPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H4EX	-	VRD4H4EPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H4FX	-	VRD4H4FPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H4FX	-	VRD4H4FPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H4GX	-	VRD4H4GPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H4GX	-	VRD4H4GPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H4HX	-	VRD4H4HPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H4HX	-	VRD4H4HPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H4JX	-	VRD4H4JPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H4JX	-	VRD4H4JPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H4KX	-	VRD4H4KPNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4H4KX	-	VRD4H4KPTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4H50X	-	VRD4H50PNX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4H50X	-	VRD4H50PTX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J08X	-	VRD4J08NNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J08X	-	VRD4J08NTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J09X	-	VRD4J09NNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J09X	-	VRD4J09NTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J0JX	-	VRD4J0JNNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J0JX	-	VRD4J0JNTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J0KX	-	VRD4J0KNNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J0KX	-	VRD4J0KNTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J10X	-	VRD4J10NNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J10X	-	VRD4J10NTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J11X	-	VRD4J11NNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J11X	-	VRD4J11NTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J12X	-	VRD4J12NNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J12X	-	VRD4J12NTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J13X	-	VRD4J13NNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J13X	-	VRD4J13NTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J14X	-	VRD4J14NNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J14X	-	VRD4J14NTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J15X	-	VRD4J15NNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J15X	-	VRD4J15NTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J16X	-	VRD4J16NNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J16X	-	VRD4J16NTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J17X	-	VRD4J17NNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J17X	-	VRD4J17NTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J18X	-	VRD4J18NNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J18X	-	VRD4J18NTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J19X	-	VRD4J19NNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J19X	-	VRD4J19NTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J1AX	-	VRD4J1ANNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J1AX	-	VRD4J1ANTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J1BX	-	VRD4J1BNNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J1BX	-	VRD4J1BNTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J1CX	-	VRD4J1CNNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J1CX	-	VRD4J1CNTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J1DX	-	VRD4J1DNNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J1DX	-	VRD4J1DNTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J1EX	-	VRD4J1ENNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J1EX	-	VRD4J1ENTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J1FX	-	VRD4J1FNNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J1FX	-	VRD4J1FNTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J1GX	-	VRD4J1GNNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J1GX	-	VRD4J1GNTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J1HX	-	VRD4J1HNNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J1HX	-	VRD4J1HNTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J1JX	-	VRD4J1JNNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J1JX	-	VRD4J1JNTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J1KX	-	VRD4J1KPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J1KX	-	VRD4J1KPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J20X	-	VRD4J20PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J20X	-	VRD4J20PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J21X	-	VRD4J21PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J21X	-	VRD4J21PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J22X	-	VRD4J22PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J22X	-	VRD4J22PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J23X	-	VRD4J23PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J23X	-	VRD4J23PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J24X	-	VRD4J24PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J24X	-	VRD4J24PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J25X	-	VRD4J25PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J25X	-	VRD4J25PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J26X	-	VRD4J26PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J26X	-	VRD4J26PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J27X	-	VRD4J27PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J27X	-	VRD4J27PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J28X	-	VRD4J28PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J28X	-	VRD4J28PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J29X	-	VRD4J29PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4J29X	-	VRD4J29PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J2AX	-	VRD4J2APNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J2AX	-	VRD4J2APTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J2BX	-	VRD4J2BPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J2BX	-	VRD4J2BPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J2CX	-	VRD4J2CPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J2CX	-	VRD4J2CPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J2DX	-	VRD4J2DPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J2DX	-	VRD4J2DPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J2EX	-	VRD4J2EPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J2EX	-	VRD4J2EPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J2FX	-	VRD4J2FPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J2FX	-	VRD4J2FPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J2GX	-	VRD4J2GPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J2GX	-	VRD4J2GPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J2HX	-	VRD4J2HPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J2HX	-	VRD4J2HPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J2JX	-	VRD4J2JPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J2JX	-	VRD4J2JPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J2KX	-	VRD4J2KPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J2KX	-	VRD4J2KPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J30X	-	VRD4J30PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J30X	-	VRD4J30PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J31X	-	VRD4J31PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J31X	-	VRD4J31PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J32X	-	VRD4J32PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J32X	-	VRD4J32PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J33X	-	VRD4J33PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J33X	-	VRD4J33PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J34X	-	VRD4J34PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J34X	-	VRD4J34PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J35X	-	VRD4J35PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J35X	-	VRD4J35PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J36X	-	VRD4J36PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J36X	-	VRD4J36PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J37X	-	VRD4J37PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J37X	-	VRD4J37PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J38X	-	VRD4J38PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J38X	-	VRD4J38PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J39X	-	VRD4J39PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J39X	-	VRD4J39PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J3AX	-	VRD4J3APNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J3AX	-	VRD4J3APTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J3BX	-	VRD4J3BPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J3BX	-	VRD4J3BPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J3CX	-	VRD4J3CPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J3CX	-	VRD4J3CPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J3DX	-	VRD4J3DPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J3DX	-	VRD4J3DPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J3EX	-	VRD4J3EPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J3EX	-	VRD4J3EPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J3FX	-	VRD4J3FPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J3FX	-	VRD4J3FPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J3GX	-	VRD4J3GPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J3GX	-	VRD4J3GPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J3HX	-	VRD4J3HPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J3HX	-	VRD4J3HPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J3JX	-	VRD4J3JPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J3JX	-	VRD4J3JPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J3KX	-	VRD4J3KPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J3KX	-	VRD4J3KPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J40X	-	VRD4J40PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J40X	-	VRD4J40PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J41X	-	VRD4J41PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J41X	-	VRD4J41PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J42X	-	VRD4J42PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J42X	-	VRD4J42PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J43X	-	VRD4J43PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J43X	-	VRD4J43PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J44X	-	VRD4J44PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4J44X	-	VRD4J44PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J45X	-	VRD4J45PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J45X	-	VRD4J45PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J46X	-	VRD4J46PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J46X	-	VRD4J46PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J47X	-	VRD4J47PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J47X	-	VRD4J47PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J48X	-	VRD4J48PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J48X	-	VRD4J48PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J49X	-	VRD4J49PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J49X	-	VRD4J49PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J4AX	-	VRD4J4APNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J4AX	-	VRD4J4APTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J4BX	-	VRD4J4BPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J4BX	-	VRD4J4BPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J4CX	-	VRD4J4CPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J4CX	-	VRD4J4CPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J4DX	-	VRD4J4DPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J4DX	-	VRD4J4DPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J4EX	-	VRD4J4EPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J4EX	-	VRD4J4EPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J4FX	-	VRD4J4FPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J4FX	-	VRD4J4FPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J4GX	-	VRD4J4GPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J4GX	-	VRD4J4GPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J4HX	-	VRD4J4HPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J4HX	-	VRD4J4HPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J4JX	-	VRD4J4JPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J4JX	-	VRD4J4JPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J4KX	-	VRD4J4KPNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J4KX	-	VRD4J4KPTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4J50X	-	VRD4J50PNX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4J50X	-	VRD4J50PTX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K08X	-	VRD4K08NNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K08X	-	VRD4K08NTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K09X	-	VRD4K09NNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K09X	-	VRD4K09NTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K0JX	-	VRD4K0JNNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K0JX	-	VRD4K0JNTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K0KX	-	VRD4K0KNNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K0KX	-	VRD4K0KNTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K10X	-	VRD4K10NNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K10X	-	VRD4K10NTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K11X	-	VRD4K11NNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K11X	-	VRD4K11NTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K12X	-	VRD4K12NNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K12X	-	VRD4K12NTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K13X	-	VRD4K13NNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K13X	-	VRD4K13NTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K14X	-	VRD4K14NNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K14X	-	VRD4K14NTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K15X	-	VRD4K15NNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K15X	-	VRD4K15NTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K16X	-	VRD4K16NNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K16X	-	VRD4K16NTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K17X	-	VRD4K17NNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K17X	-	VRD4K17NTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K18X	-	VRD4K18NNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K18X	-	VRD4K18NTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K19X	-	VRD4K19NNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K19X	-	VRD4K19NTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K1AX	-	VRD4K1ANNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K1AX	-	VRD4K1ANTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K1BX	-	VRD4K1BNNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K1BX	-	VRD4K1BNTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K1CX	-	VRD4K1CNNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K1CX	-	VRD4K1CNTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K1DX	-	VRD4K1DNNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K1DX	-	VRD4K1DNTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K1EX	-	VRD4K1ENNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4K1EX	-	VRD4K1ENTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K1FX	-	VRD4K1FNNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K1FX	-	VRD4K1FNTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K1GX	-	VRD4K1GNNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K1GX	-	VRD4K1GNTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K1HX	-	VRD4K1HNNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K1HX	-	VRD4K1HNTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K1JX	-	VRD4K1JNNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K1JX	-	VRD4K1JNTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K1KX	-	VRD4K1KPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K1KX	-	VRD4K1KPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K20X	-	VRD4K20PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K20X	-	VRD4K20PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K21X	-	VRD4K21PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K21X	-	VRD4K21PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K22X	-	VRD4K22PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K22X	-	VRD4K22PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K23X	-	VRD4K23PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K23X	-	VRD4K23PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K24X	-	VRD4K24PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K24X	-	VRD4K24PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K25X	-	VRD4K25PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K25X	-	VRD4K25PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K26X	-	VRD4K26PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K26X	-	VRD4K26PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K27X	-	VRD4K27PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K27X	-	VRD4K27PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K28X	-	VRD4K28PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K28X	-	VRD4K28PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K29X	-	VRD4K29PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K29X	-	VRD4K29PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K2AX	-	VRD4K2APNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K2AX	-	VRD4K2APTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K2BX	-	VRD4K2BPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K2BX	-	VRD4K2BPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K2CX	-	VRD4K2CPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K2CX	-	VRD4K2CPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K2DX	-	VRD4K2DPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K2DX	-	VRD4K2DPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K2EX	-	VRD4K2EPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K2EX	-	VRD4K2EPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K2FX	-	VRD4K2FPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K2FX	-	VRD4K2FPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K2GX	-	VRD4K2GPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K2GX	-	VRD4K2GPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K2HX	-	VRD4K2HPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K2HX	-	VRD4K2HPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K2JX	-	VRD4K2JPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K2JX	-	VRD4K2JPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K2KX	-	VRD4K2KPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K2KX	-	VRD4K2KPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K30X	-	VRD4K30PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K30X	-	VRD4K30PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K31X	-	VRD4K31PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K31X	-	VRD4K31PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K32X	-	VRD4K32PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K32X	-	VRD4K32PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K33X	-	VRD4K33PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K33X	-	VRD4K33PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K34X	-	VRD4K34PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K34X	-	VRD4K34PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K35X	-	VRD4K35PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K35X	-	VRD4K35PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K36X	-	VRD4K36PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K36X	-	VRD4K36PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K37X	-	VRD4K37PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K37X	-	VRD4K37PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K38X	-	VRD4K38PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K38X	-	VRD4K38PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K39X	-	VRD4K39PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4K39X	-	VRD4K39PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K3AX	-	VRD4K3APNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K3AX	-	VRD4K3APTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K3BX	-	VRD4K3BPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K3BX	-	VRD4K3BPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K3CX	-	VRD4K3CPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K3CX	-	VRD4K3CPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K3DX	-	VRD4K3DPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K3DX	-	VRD4K3DPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K3EX	-	VRD4K3EPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K3EX	-	VRD4K3EPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K3FX	-	VRD4K3FPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K3FX	-	VRD4K3FPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K3GX	-	VRD4K3GPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K3GX	-	VRD4K3GPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K3HX	-	VRD4K3HPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K3HX	-	VRD4K3HPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K3JX	-	VRD4K3JPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K3JX	-	VRD4K3JPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K3KX	-	VRD4K3KPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K3KX	-	VRD4K3KPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K40X	-	VRD4K40PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K40X	-	VRD4K40PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K41X	-	VRD4K41PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K41X	-	VRD4K41PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K42X	-	VRD4K42PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K42X	-	VRD4K42PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K43X	-	VRD4K43PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K43X	-	VRD4K43PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K44X	-	VRD4K44PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K44X	-	VRD4K44PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K45X	-	VRD4K45PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K45X	-	VRD4K45PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K46X	-	VRD4K46PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K46X	-	VRD4K46PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K47X	-	VRD4K47PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K47X	-	VRD4K47PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K48X	-	VRD4K48PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K48X	-	VRD4K48PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K49X	-	VRD4K49PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K49X	-	VRD4K49PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K4AX	-	VRD4K4APNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K4AX	-	VRD4K4APTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K4BX	-	VRD4K4BPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K4BX	-	VRD4K4BPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K4CX	-	VRD4K4CPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K4CX	-	VRD4K4CPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K4DX	-	VRD4K4DPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K4DX	-	VRD4K4DPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K4EX	-	VRD4K4EPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K4EX	-	VRD4K4EPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K4FX	-	VRD4K4FPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K4FX	-	VRD4K4FPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K4GX	-	VRD4K4GPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K4GX	-	VRD4K4GPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K4HX	-	VRD4K4HPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K4HX	-	VRD4K4HPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K4JX	-	VRD4K4JPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K4JX	-	VRD4K4JPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K4KX	-	VRD4K4KPNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K4KX	-	VRD4K4KPTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4K50X	-	VRD4K50PNX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D4K50X	-	VRD4K50PTX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D4N01	-	MMDF4N01HD	n-MOSFET	V-MOS, Dual, LogL, 20V, 5,2A, <45mΩ	SOP-8	47	-	8d	Mot
D4N01Z	-	MMDF4N01Z	n-MOSFET	V-MOS, Dual, LogL, 20V, 4,5A, <45mΩ	SOP-8	47	-	8d	Mot
D5	-	RN2906AFS	Si-pnp-Digi	Dual, Sw, 50V, 80mA, 50mW, R1/R2=4.7k/47k	FS6	35	TD4	7b	Tos
D5008X	-	VRD5008NNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5008X	-	VRD5008NTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5009X	-	VRD5009NNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=0.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5009X	-	VRD5009NTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=0.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D500JX	-	VRD500JNNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=0.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D500JX	-	VRD500JNTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=0.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D500KX	-	VRD500KNNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=0.95V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D500KX	-	VRD500KNTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=0.95V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5010X	-	VRD5010NNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.0V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5010X	-	VRD5010NTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.0V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5011X	-	VRD5011NNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.1V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5011X	-	VRD5011NTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.1V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5012X	-	VRD5012NNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.2V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5012X	-	VRD5012NTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.2V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5013X	-	VRD5013NNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.3V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5013X	-	VRD5013NTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.3V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5014X	-	VRD5014NNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.4V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5014X	-	VRD5014NTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.4V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5015X	-	VRD5015NNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.5V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5015X	-	VRD5015NTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.5V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5016X	-	VRD5016NNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.6V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5016X	-	VRD5016NTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.6V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5017X	-	VRD5017NNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.7V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5017X	-	VRD5017NTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.7V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5018X	-	VRD5018NNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.8V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5018X	-	VRD5018NTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.8V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5019X	-	VRD5019NNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.9V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5019X	-	VRD5019NTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.9V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D501AX	-	VRD501ANNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.05V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D501AX	-	VRD501ANTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.05V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D501BX	-	VRD501BNNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.15V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D501BX	-	VRD501BNTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.15V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D501CX	-	VRD501CNNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.25V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D501CX	-	VRD501CNTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.25V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D501DX	-	VRD501DNNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.35V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D501DX	-	VRD501DNTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.35V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D501EX	-	VRD501ENNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.45V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D501EX	-	VRD501ENTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.45V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D501FX	-	VRD501FNNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.55V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D501FX	-	VRD501FNTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.55V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D501GX	-	VRD501GNNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.65V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D501GX	-	VRD501GNTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.65V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D501HX	-	VRD501HNNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.75V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D501HX	-	VRD501HNTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.75V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D501JX	-	VRD501JNNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.85V±20mV, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D501JX	-	VRD501JNTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.85V±20mV, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D501KX	-	VRD501KPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D501KX	-	VRD501KPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5020X	-	VRD5020PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5020X	-	VRD5020PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5021X	-	VRD5021PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5021X	-	VRD5021PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5022X	-	VRD5022PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5022X	-	VRD5022PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5023X	-	VRD5023PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5023X	-	VRD5023PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5024X	-	VRD5024PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5024X	-	VRD5024PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5025X	-	VRD5025PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5025X	-	VRD5025PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5026X	-	VRD5026PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5026X	-	VRD5026PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5027X	-	VRD5027PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5027X	-	VRD5027PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5028X	-	VRD5028PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5028X	-	VRD5028PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5029X	-	VRD5029PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5029X	-	VRD5029PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D502AX	-	VRD502APNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D502AX	-	VRD502APTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D502BX	-	VRD502BPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D502BX	-	VRD502BPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D502CX	-	VRD502CPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D502CX	-	VRD502CPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D502DX	-	VRD502DPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D502DX	-	VRD502DPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D502EX	-	VRD502EPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D502EX	-	VRD502EPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D502FX	-	VRD502FPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D502FX	-	VRD502FPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D502GX	-	VRD502GPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D502GX	-	VRD502GPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D502HX	-	VRD502HPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D502HX	-	VRD502HPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D502JX	-	VRD502JPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D502JX	-	VRD502JPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D502KX	-	VRD502KPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D502KX	-	VRD502KPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5030X	-	VRD5030PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5030X	-	VRD5030PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5031X	-	VRD5031PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5031X	-	VRD5031PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5032X	-	VRD5032PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5032X	-	VRD5032PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5033X	-	VRD5033PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5033X	-	VRD5033PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5034X	-	VRD5034PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5034X	-	VRD5034PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5035X	-	VRD5035PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5035X	-	VRD5035PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5036X	-	VRD5036PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5036X	-	VRD5036PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5037X	-	VRD5037PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5037X	-	VRD5037PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5038X	-	VRD5038PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5038X	-	VRD5038PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5039X	-	VRD5039PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5039X	-	VRD5039PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D503AX	-	VRD503APNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D503AX	-	VRD503APTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D503BX	-	VRD503BPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D503BX	-	VRD503BPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D503CX	-	VRD503CPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D503CX	-	VRD503CPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D503DX	-	VRD503DPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D503DX	-	VRD503DPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D503EX	-	VRD503EPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D503EX	-	VRD503EPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D503FX	-	VRD503FPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D503FX	-	VRD503FPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D503GX	-	VRD503GPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D503GX	-	VRD503GPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D503HX	-	VRD503HPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D503HX	-	VRD503HPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D503JX	-	VRD503JPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D503JX	-	VRD503JPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D503KX	-	VRD503KPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D503KX	-	VRD503KPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5040X	-	VRD5040PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5040X	-	VRD5040PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5041X	-	VRD5041PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.1V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5041X	-	VRD5041PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.1V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5042X	-	VRD5042PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.2V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5042X	-	VRD5042PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.2V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5043X	-	VRD5043PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.3V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5043X	-	VRD5043PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.3V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5044X	-	VRD5044PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.4V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5044X	-	VRD5044PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.4V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5045X	-	VRD5045PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.5V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5045X	-	VRD5045PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.5V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5046X	-	VRD5046PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.6V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5046X	-	VRD5046PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.6V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5047X	-	VRD5047PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.7V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5047X	-	VRD5047PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.7V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D5048X	-	VRD5048PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.8V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5048X	-	VRD5048PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.8V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5049X	-	VRD5049PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.9V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5049X	-	VRD5049PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.9V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D504AX	-	VRD504APNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.05V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D504AX	-	VRD504APTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.05V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D504BX	-	VRD504BPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.15V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D504BX	-	VRD504BPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.15V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D504CX	-	VRD504CPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.25V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D504CX	-	VRD504CPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.25V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D504DX	-	VRD504DPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.35V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D504DX	-	VRD504DPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.35V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D504EX	-	VRD504EPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.45V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D504EX	-	VRD504EPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.45V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D504FX	-	VRD504FPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.55V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D504FX	-	VRD504FPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.55V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D504GX	-	VRD504GPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.65V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D504GX	-	VRD504GPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.65V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D504HX	-	VRD504HPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.75V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D504HX	-	VRD504HPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.75V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D504JX	-	VRD504JPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.85V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D504JX	-	VRD504JPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.85V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D504KX	-	VRD504KPNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.95V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D504KX	-	VRD504KPTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.95V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D5050X	-	VRD5050PNX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=5.0V±1%, 200mA, +CE	SON-6	35xv	VR19	7q	Ans
D5050X	-	VRD5050PTX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=5.0V±1%, 200mA, +CE	SOT-23-6	33x5	VR19	7q	Ans
D50A	-	R1171S501A	LVR-IC	LDO, 5.0V±2%, 1.5A, -CE	HSOP-6J	vrk	VR4	7h	Ric
D50B	-	R1171S501B	LVR-IC	LDO, 5.0V±2%, 1.5A, +CE	HSOP-6J	vrk	VR4	7h	Ric
D5632	-	BD5632NUX	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 2.25W(5V/4Ω), stand-by	VSON-8	44	-	8c	Rhm
D5634	-	BD5634NUX	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 2.25W(5V/4Ω), stand-by	VSON-8	44	-	8c	Rhm
D5638	-	BD5638NUX	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 2.25W(5V/4Ω), stand-by	VSON-8	44	-	8c	Rhm
D6	-	RN2907AFS	Si-pnp-Digi	Dual, Sw, 50V, 80mA, 50mW, R1/R2=10k/47k	FS6	35	TD4	7b	Tos
D7	-	RN2908AFS	Si-pnp-Digi	Dual, Sw, 50V, 80mA, 50mW, R1/R2=22k/47k	FS6	35	TD4	7b	Tos
D7830	-	BD7830NUV	Lin-IC	AF PA, BTL, 2.4..5.5V, 2.25W(5V/4Ω), stand-by	VSON-8	44	-	8c	Rhm
D8	-	IMD8A	Si-n/p-Digi	Sw, 50V, 100mA, 250MHz, R1=47k	SOT-23-6	33	TD2	7b	Rhm
D8	-	RN2909AFS	Si-pnp-Digi	Dual, Sw, 50V, 80mA, 50mW, R1/R2=47k/22k	FS6	35	TD4	7b	Tos
D9	-	IMD9A	Si-n/p-Digi	Sw, 50V, 100mA, 250MHz, R1/R2=10k/47k	SOT-23-6	33	TD2	7b	Rhm
D9	-	RN2910AFS	Si-pnp-Digi	Dual, Sw, 50V, 80mA, 50mW, R1=4.7k	FS6	35	TD4	7b	Tos
DA	-	R5220D101B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1V	SON-6	dc3	DC8	7g	Ric
DA	-	RP152N025A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DB	-	R5220D111B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.1V	SON-6	dc3	DC8	7g	Ric
DB	-	RP152N026A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DC	-	R5220D121B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.2V	SON-6	dc3	DC8	7g	Ric
DC	-	RP152N027A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DC	-	SSM6N04FU	n-MOSFET	Dual, LogL, 20V, 100mA, 200mW, <12Ω(10mA), 0.16/0.19µs	US6	33	T13	7b	Tos
DD	-	R5220D131B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.3V	SON-6	dc3	DC8	7g	Ric
DD	-	RP152N028A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DE	-	R5220D141B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.4V	SON-6	dc3	DC8	7g	Ric
DE	-	RP152N029A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DE-	-	RT9198-4GPF	LVR-IC	LDO, 4.75V±1%, 300mA, +CE	MSOP-8	55	VR4	8d	Rct
DF	-	R5220D151B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.5V	SON-6	dc3	DC8	7g	Ric
DF	-	RN2911AFS	Si-pnp-Digi	Dual, Sw, 50V, 80mA, 50mW, R1=10k	FS6	35	TD4	7b	Tos
DF	-	RP152N030A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DG	-	R5220D161B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.6V	SON-6	dc3	DC8	7g	Ric
DG	-	RP152N031A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DGR	-	KTX102U-GR	Si-n/p	Dual, GP, 60(50)V, 150mA, 200mW, B=200..400, >80MHz	US6	33	T15	7b	Kec
DH	-	R5220D171B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.7V	SON-6	dc3	DC8	7g	Ric
DH	-	RP152N032A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DH-	-	RT9193-25PF	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	MSOP-8	55vtc	VR7	8d	Rct
DH=	-	RT9193-25GF	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	MSOP-8	47vtc	VR7	8d	Rct
DJ	-	R5220D181B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.8V	SON-6	dc3	DC8	7g	Ric
DJ	-	RP152N033A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DJ-	-	RT9193-28PF	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	MSOP-8	55vtc	VR7	8d	Rct
DJ=	-	RT9193-28GF	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	MSOP-8	47vtc	VR7	8d	Rct
DK	-	R5220D191B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.9V	SON-6	dc3	DC8	7g	Ric
DK	-	RP152N034A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DK-	-	RT9193-33PF	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	MSOP-8	55vtc	VR7	8d	Rct
DL	-	R5220D201B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2V	SON-6	dc3	DC8	7g	Ric
DL	-	RP152N035A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DM	-	AIC1648CK	LDR-IC	1.2 MHz PWM White LED driver, OVP 4.2V	TSOT-23-6	33sv	LD2	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DM	-	R5220D211B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.1V	SON-6	dc3	DC8	7g	Ric
DM	-	RP152N036A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DMP	-	AIC1648PK	LDR-IC	1.2 MHz PWM White LED driver, OVP 4.2V	TSOT-23-6	33sv	LD2	7b	Aic
DN	-	R5220D221B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.2V	SON-6	dc3	DC8	7g	Ric
DN	-	RP152N037A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DP	-	R5220D231B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.3V	SON-6	dc3	DC8	7g	Ric
DP	-	RP152N038A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DPE	-	XC6214P152MR	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DPF	-	XC6214P162MR	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DPH	-	XC6214P172MR	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DPK	-	XC6214P182MR	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DPL	-	XC6214P192MR	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DPM	-	XC6214P202MR	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DPN	-	XC6214P212MR	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DPP	-	XC6214P222MR	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DPR	-	XC6214P232MR	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DPS	-	XC6214P242MR	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DPT	-	XC6214P252MR	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DPU	-	XC6214P262MR	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DPV	-	XC6214P272MR	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DPX	-	XC6214P282MR	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DPY	-	XC6214P292MR	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DPZ	-	XC6214P302MR	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DQ	-	R5220D241B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.4V	SON-6	dc3	DC8	7g	Ric
DQ	-	RP152N039A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DR	-	R5220D251B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.5V	SON-6	dc3	DC8	7g	Ric
DR	-	RP152N040A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DR0	-	XC6214P312MR	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DR1	-	XC6214P322MR	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DR2	-	XC6214P332MR	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DR3	-	XC6214P342MR	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DR4	-	XC6214P352MR	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DR5	-	XC6214P362MR	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DR6	-	XC6214P372MR	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DR7	-	XC6214P382MR	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DR8	-	XC6214P392MR	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DR9	-	XC6214P402MR	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DRA	-	XC6214P412MR	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DRB	-	XC6214P422MR	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DRC	-	XC6214P432MR	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DRD	-	XC6214P442MR	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DRE	-	XC6214P452MR	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DRF	-	XC6214P462MR	LVR-IC	LDO, 4.6V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DRH	-	XC6214P472MR	LVR-IC	LDO, 4.7V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DRK	-	XC6214P482MR	LVR-IC	LDO, 4.8V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DRL	-	XC6214P492MR	LVR-IC	LDO, 4.9V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DRN	-	XC6214P502MR	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-26	yt	VR1	7d	Tor
DS	-	R5220D261B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.6V	SON-6	dc3	DC8	7g	Ric
DS	-	RP152N041A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DT	-	R5220D271B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.7V	SON-6	dc3	DC8	7g	Ric
DT	-	RP152N042A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DU	-	R5220D281B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.8V	SON-6	dc3	DC8	7g	Ric
DU	-	RP152N043A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DV	-	R5220D291B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.9V	SON-6	dc3	DC8	7g	Ric
DV	-	RP152N044A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DW	-	R5220D012B	DC-DC-IC	PWM step-down, +CE, Vdc=1.2V, Vldo=1.1V	SON-6	dc3	DC8	7g	Ric
DW	-	RP152N045A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DW2	-	BAS40DWGP	Si-diode	Triple, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-363	33dd	-	7b	Chm
DW3	-	BAS70DWGP	Si-diode	Triple, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33dd	-	7b	Chm
DX	-	R5220D022B	DC-DC-IC	PWM step-down, +CE, Vdc=1.5V, Vldo=1.1V	SON-6	dc3	DC8	7g	Ric
DX	-	RP152N046A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DY	-	KTX102U-Y	Si-n/p	Dual, GP, 60(50)V, 150mA, 200mW, B=120..240, >80MHz	US6	33	T15	7b	Kec
DY	-	R5220D032B	DC-DC-IC	PWM step-down, +CE, Vdc=1.3V, Vldo=1.05V	SON-6	dc3	DC8	7g	Ric
DY	-	RP152N047A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
DZ	-	R5220D042B	DC-DC-IC	PWM step-down, +CE, Vdc=1.3V, Vldo=1.1V	SON-6	dc3	DC8	7g	Ric
DZ	-	RP152N048A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
E0	-	TC1072-4.0VCH	LVR-IC	LDO, 4.0V±2%, 50mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
E01A	-	R5324D001A	LVR-IC	LDO, Triple out, V1/V2/V3=2.8V/2.8V/2.8V±1%, 200mA, +CE, CL	SON-8	zj	VR21	8c	Ric
E01B	-	R5324D001B	LVR-IC	LDO, Triple out, V1/V2/V3=2.8V/2.8V/2.8V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E020	-	R1514S020B	LVR-IC	2.0V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E021	-	R1514S021B	LVR-IC	2.1V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E022	-	R1514S022B	LVR-IC	2.2V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E023	-	R1514S023B	LVR-IC	2.3V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E024	-	R1514S024B	LVR-IC	2.4V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E025	-	R1514S025B	LVR-IC	2.5V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E026	-	R1514S026B	LVR-IC	2.6V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E027	-	R1514S027B	LVR-IC	2.7V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E028	-	R1514S028B	LVR-IC	2.8V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E029	-	R1514S029B	LVR-IC	2.9V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E02A	-	R5324D002A	LVR-IC	LDO, Triple out, V1/V2/V3=2.9V/2.9V/2.9V±1%, 200mA, +CE, CL	SON-8	zj	VR21	8c	Ric
E02B	-	R5324D002B	LVR-IC	LDO, Triple out, V1/V2/V3=2.9V/2.9V/2.9V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E030	-	R1514S030B	LVR-IC	3.0V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E031	-	R1514S031B	LVR-IC	3.1V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E032	-	R1514S032B	LVR-IC	3.2V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E033	-	R1514S033B	LVR-IC	3.3V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E034	-	R1514S034B	LVR-IC	3.4V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E035	-	R1514S035B	LVR-IC	3.5V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E036	-	R1514S036B	LVR-IC	3.6V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E037	-	R1514S037B	LVR-IC	3.7V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E038	-	R1514S038B	LVR-IC	3.8V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E039	-	R1514S039B	LVR-IC	3.9V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E03A	-	R5324D003A	LVR-IC	LDO, Triple out, V1/V2/V3=3.0V/3.0V/3.0V±1%, 200mA, +CE, CL	SON-8	zj	VR21	8c	Ric
E03B	-	R5324D003B	LVR-IC	LDO, Triple out, V1/V2/V3=3.0V/3.0V/3.0V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E040	-	R1514S040B	LVR-IC	4.0V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E041	-	R1514S041B	LVR-IC	4.1V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E042	-	R1514S042B	LVR-IC	4.2V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E043	-	R1514S043B	LVR-IC	4.3V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E044	-	R1514S044B	LVR-IC	4.4V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E045	-	R1514S045B	LVR-IC	4.5V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E046	-	R1514S046B	LVR-IC	4.6V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E047	-	R1514S047B	LVR-IC	4.7V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E048	-	R1514S048B	LVR-IC	4.8V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E049	-	R1514S049B	LVR-IC	4.9V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E04A	-	R5324D004A	LVR-IC	LDO, Triple out, V1/V2/V3=3.3V/3.0V/2.5V±1%, 200mA, +CE, CL	SON-8	zj	VR21	8c	Ric
E04B	-	R5324D004B	LVR-IC	LDO, Triple out, V1/V2/V3=3.3V/3.0V/2.5V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E050	-	R1514S050B	LVR-IC	5.0V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E051	-	R1514S051B	LVR-IC	5.1V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E052	-	R1514S052B	LVR-IC	5.2V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E053	-	R1514S053B	LVR-IC	5.3V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E054	-	R1514S054B	LVR-IC	5.4V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E055	-	R1514S055B	LVR-IC	5.5V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E056	-	R1514S056B	LVR-IC	5.6V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E057	-	R1514S057B	LVR-IC	5.7V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E058	-	R1514S058B	LVR-IC	5.8V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E059	-	R1514S059B	LVR-IC	5.9V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E05B	-	R5324D005B	LVR-IC	LDO, Triple out, V1/V2/V3=1.5V/2.9V/1.5V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E060	-	R1514S060B	LVR-IC	6.0V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E061	-	R1514S061B	LVR-IC	6.1V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E062	-	R1514S062B	LVR-IC	6.2V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E063	-	R1514S063B	LVR-IC	6.3V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E064	-	R1514S064B	LVR-IC	6.4V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E065	-	R1514S065B	LVR-IC	6.5V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E066	-	R1514S066B	LVR-IC	6.6V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E067	-	R1514S067B	LVR-IC	6.7V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E068	-	R1514S068B	LVR-IC	6.8V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E069	-	R1514S069B	LVR-IC	6.9V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E06B	-	R5324D006B	LVR-IC	LDO, Triple out, V1/V2/V3=2.8V/2.8V/2.9V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E070	-	R1514S070B	LVR-IC	7.0V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E071	-	R1514S071B	LVR-IC	7.1V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E072	-	R1514S072B	LVR-IC	7.2V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E073	-	R1514S073B	LVR-IC	7.3V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E074	-	R1514S074B	LVR-IC	7.4V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E075	-	R1514S075B	LVR-IC	7.5V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E076	-	R1514S076B	LVR-IC	7.6V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E077	-	R1514S077B	LVR-IC	7.7V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E078	-	R1514S078B	LVR-IC	7.8V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E079	-	R1514S079B	LVR-IC	7.9V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E07B	-	R5324D007B	LVR-IC	LDO, Triple out, V1/V2/V3=3.3V/2.5V/1.8V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E080	-	R1514S080B	LVR-IC	8.0V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E081	-	R1514S081B	LVR-IC	8.1V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E082	-	R1514S082B	LVR-IC	8.2V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E083	-	R1514S083B	LVR-IC	8.3V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E084	-	R1514S084B	LVR-IC	8.4V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E085	-	R1514S085B	LVR-IC	8.5V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E086	-	R1514S086B	LVR-IC	8.6V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E087	-	R1514S087B	LVR-IC	8.7V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E088	-	R1514S088B	LVR-IC	8.8V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E089	-	R1514S089B	LVR-IC	8.9V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E08B	-	R5324D008B	LVR-IC	LDO, Triple out, V1/V2/V3=3.3V/2.8V/2.7V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E090	-	R1514S090B	LVR-IC	9.0V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E091	-	R1514S091B	LVR-IC	9.1V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E092	-	R1514S092B	LVR-IC	9.2V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E093	-	R1514S093B	LVR-IC	9.3V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E094	-	R1514S094B	LVR-IC	9.4V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E095	-	R1514S095B	LVR-IC	9.5V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E096	-	R1514S096B	LVR-IC	9.6V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E097	-	R1514S097B	LVR-IC	9.7V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E098	-	R1514S098B	LVR-IC	9.8V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E099	-	R1514S099B	LVR-IC	9.9V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E09B	-	R5324D009B	LVR-IC	LDO, Triple out, V1/V2/V3=3.1V/2.8V/1.8V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E1	-	1PS88SB82	Si-diode	Triple, Schottky, Sw, 15V, 30mA, Vf<0.7V(30mA), <1pF	SOT-363	33dd	-	7b	PhH
E1	-	TC1072-2.5VCH	LVR-IC	LDO, 2.5V±2%, 50mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
E100	-	R1514S100B	LVR-IC	10V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E101	-	R1514S101B	LVR-IC	10.1V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E102	-	R1514S102B	LVR-IC	10.2V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E103	-	R1514S103B	LVR-IC	10.3V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E104	-	R1514S104B	LVR-IC	10.4V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E105	-	R1514S105B	LVR-IC	10.5V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E106	-	R1514S106B	LVR-IC	10.6V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E107	-	R1514S107B	LVR-IC	10.7V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E108	-	R1514S108B	LVR-IC	10.8V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E109	-	R1514S109B	LVR-IC	10.9V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E10B	-	R5324D010B	LVR-IC	LDO, Triple out, V1/V2/V3=1.8V/3.1V/3.1V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E110	-	R1514S110B	LVR-IC	11.0V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E111	-	R1514S111B	LVR-IC	11.1V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E112	-	R1514S112B	LVR-IC	11.2V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E113	-	R1514S113B	LVR-IC	11.3V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E114	-	R1514S114B	LVR-IC	11.4V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E115	-	R1514S115B	LVR-IC	11.5V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E116	-	R1514S116B	LVR-IC	11.6V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E117	-	R1514S117B	LVR-IC	11.7V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E118	-	R1514S118B	LVR-IC	11.8V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E119	-	R1514S119B	LVR-IC	11.9V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E11B	-	R5324D011B	LVR-IC	LDO, Triple out, V1/V2/V3=3.0V/2.5V/1.8V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E120	-	R1514S120B	LVR-IC	12.0V±2%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
E12B	-	R5324D012B	LVR-IC	LDO, Triple out, V1/V2/V3=3.3V/3.0V/1.8V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E13B	-	R5324D013B	LVR-IC	LDO, Triple out, V1/V2/V3=3.0V/1.8V/1.8V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E14B	-	R5324D014B	LVR-IC	LDO, Triple out, V1/V2/V3=3.3V/3.0V/3.5V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E15A	-	R1170D151A	LVR-IC	LDO, 1.5V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E15A	-	RD5RW15AA	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E15B	-	R1170D151B	LVR-IC	LDO, 1.5V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E15B	-	R5324D015B	LVR-IC	LDO, Triple out, V1/V2/V3=3.3V/1.8V/1.8V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E15B	-	RD5RW15BA	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E15C	-	RD5RW15CA	LVR-IC	LDO, 1.5V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E16A	-	R1170D161A	LVR-IC	LDO, 1.6V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E16A	-	RD5RW16AA	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E16B	-	R1170D161B	LVR-IC	LDO, 1.6V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E16B	-	R5324D016B	LVR-IC	LDO, Triple out, V1/V2/V3=3.0V/2.8V/1.8V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E16B	-	RD5RW16BA	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E16C	-	RD5RW16CA	LVR-IC	LDO, 1.6V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E17A	-	R1170D171A	LVR-IC	LDO, 1.7V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E17A	-	RD5RW17AA	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E17B	-	R1170D171B	LVR-IC	LDO, 1.7V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E17B	-	R5324D017B	LVR-IC	LDO, Triple out, V1/V2/V3=2.9V/1.5V/2.9V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E17B	-	RD5RW17BA	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E17C	-	RD5RW17CA	LVR-IC	LDO, 1.7V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E18A	-	R1170D181A	LVR-IC	LDO, 1.8V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E18A	-	RD5RW18AA	LVR-IC	LDO, 1.8V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E18B	-	R1170D181B	LVR-IC	LDO, 1.8V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E18B	-	R5324D018B	LVR-IC	LDO, Triple out, V1/V2/V3=3.3V/3.3V/3.3V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E18B	-	RD5RW18BA	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E18C	-	RD5RW18CA	LVR-IC	LDO, 1.8V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E19A	-	R1170D191A	LVR-IC	LDO, 1.9V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E19A	-	RD5RW19AA	LVR-IC	LDO, 1.9V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E19B	-	R1170D191B	LVR-IC	LDO, 1.9V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E19B	-	R5324D019B	LVR-IC	LDO, Triple out, V1/V2/V3=1.5V/1.85V/2.85V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E19B	-	RD5RW19BA	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E19C	-	RD5RW19CA	LVR-IC	LDO, 1.9V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E1p	-	1PS88SB82	Si-diode	Triple, Schottky, Sw, 15V, 30mA, Vf<0.7V(30mA), <1pF	SOT-363	33dd	-	7b	PhH
E1t	-	1PS88SB82	Si-diode	Triple, Schottky, Sw, 15V, 30mA, Vf<0.7V(30mA), <1pF	SOT-363	33dd	-	7b	PhM
E1W	-	1PS88SB82	Si-diode	Triple, Schottky, Sw, 15V, 30mA, Vf<0.7V(30mA), <1pF	SOT-363	33dd	-	7b	PhC
E2	-	TC1072-2.7VCH	LVR-IC	LDO, 2.7V±2%, 50mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
E20A	-	R1170D201A	LVR-IC	LDO, 2.0V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E20A	-	RD5RW20AA	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E20B	-	R1170D201B	LVR-IC	LDO, 2.0V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E20B	-	R5324D020B	LVR-IC	LDO, Triple out, V1/V2/V3=3.0V/2.8V/1.5V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E20B	-	RD5RW20BA	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E20C	-	RD5RW20CA	LVR-IC	LDO, 2.0V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E21A	-	R1170D211A	LVR-IC	LDO, 2.1V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E21A	-	RD5RW21AA	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E21B	-	R1170D211B	LVR-IC	LDO, 2.1V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E21B	-	R5324D021B	LVR-IC	LDO, Triple out, V1/V2/V3=2.5V/3.0V/3.3V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E21B	-	RD5RW21BA	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E21C	-	RD5RW21CA	LVR-IC	LDO, 2.1V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E22A	-	R1170D221A	LVR-IC	LDO, 2.2V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E22A	-	RD5RW22AA	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E22B	-	R1170D221B	LVR-IC	LDO, 2.2V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E22B	-	R5324D022B	LVR-IC	LDO, Triple out, V1/V2/V3=1.8V/2.5V/2.8V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E22B	-	RD5RW22BA	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E22C	-	RD5RW22CA	LVR-IC	LDO, 2.2V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E23A	-	R1170D231A	LVR-IC	LDO, 2.3V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E23A	-	RD5RW23AA	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E23B	-	R1170D231B	LVR-IC	LDO, 2.3V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E23B	-	R5324D023B	LVR-IC	LDO, Triple out, V1/V2/V3=2.8V/1.8V/1.8V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E23B	-	RD5RW23BA	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E23C	-	RD5RW23CA	LVR-IC	LDO, 2.3V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E24A	-	R1170D241A	LVR-IC	LDO, 2.4V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E24A	-	RD5RW24AA	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E24B	-	R1170D241B	LVR-IC	LDO, 2.4V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E24B	-	R5324D024B	LVR-IC	LDO, Triple out, V1/V2/V3=2.8V/1.8V/2.85V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E24B	-	RD5RW24BA	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E24C	-	RD5RW24CA	LVR-IC	LDO, 2.4V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E25A	-	R1170D251A	LVR-IC	LDO, 2.5V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E25A	-	RD5RW25AA	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E25B	-	R1170D251B	LVR-IC	LDO, 2.5V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E25B	-	R5324D025B	LVR-IC	LDO, Triple out, V1/V2/V3=2.8V/2.6V/1.8V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E25B	-	RD5RW25BA	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E25C	-	RD5RW25CA	LVR-IC	LDO, 2.5V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E26A	-	R1170D261A	LVR-IC	LDO, 2.6V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E26A	-	RD5RW26AA	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E26B	-	R1170D261B	LVR-IC	LDO, 2.6V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E26B	-	R5324D026B	LVR-IC	LDO, Triple out, V1/V2/V3=2.8V/2.8V/1.8V±1%, 200mA, +CE	SON-8	zj	VR21	8c	Ric
E26B	-	RD5RW26BA	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E26C	-	RD5RW26CA	LVR-IC	LDO, 2.6V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E27A	-	R1170D271A	LVR-IC	LDO, 2.7V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E27A	-	RD5RW27AA	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E27B	-	R1170D271B	LVR-IC	LDO, 2.7V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E27B	-	RD5RW27BA	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E27C	-	RD5RW27CA	LVR-IC	LDO, 2.7V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E28A	-	R1170D281A	LVR-IC	LDO, 2.8V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E28A	-	RD5RW28AA	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E28B	-	R1170D281B	LVR-IC	LDO, 2.8V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E28B	-	RD5RW28BA	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E28C	-	RD5RW28CA	LVR-IC	LDO, 2.8V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E29A	-	R1170D291A	LVR-IC	LDO, 2.9V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E29A	-	RD5RW29AA	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E29B	-	R1170D291B	LVR-IC	LDO, 2.9V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E29B	-	RD5RW29BA	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E29C	-	RD5RW29CA	LVR-IC	LDO, 2.9V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E3	-	NC7ST00L6	CMOS-Log	2-input NAND gate	MPAK-6	33	Log1	7b	F



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E3	-	TC1072-3.0VCH	LVR-IC	LDO, 3.0V±2%, 50mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
E30A	-	R1170D301A	LVR-IC	LDO, 3.0V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E30A	-	RD5RW30AA	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E30B	-	R1170D301B	LVR-IC	LDO, 3.0V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E30B	-	RD5RW30BA	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E30C	-	RD5RW30CA	LVR-IC	LDO, 3.0V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E31A	-	R1170D311A	LVR-IC	LDO, 3.1V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E31A	-	RD5RW31AA	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E31B	-	R1170D311B	LVR-IC	LDO, 3.1V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E31B	-	RD5RW31BA	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E31C	-	RD5RW31CA	LVR-IC	LDO, 3.1V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E32A	-	R1170D321A	LVR-IC	LDO, 3.2V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E32A	-	RD5RW32AA	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E32B	-	R1170D321B	LVR-IC	LDO, 3.2V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E32B	-	RD5RW32BA	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E32C	-	RD5RW32CA	LVR-IC	LDO, 3.2V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E33A	-	R1170D331A	LVR-IC	LDO, 3.3V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E33A	-	RD5RW33AA	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E33B	-	R1170D331B	LVR-IC	LDO, 3.3V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E33B	-	RD5RW33BA	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E33C	-	RD5RW33CA	LVR-IC	LDO, 3.3V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E34A	-	R1170D341A	LVR-IC	LDO, 3.4V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E34A	-	RD5RW34AA	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E34B	-	R1170D341B	LVR-IC	LDO, 3.4V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E34B	-	RD5RW34BA	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E34C	-	RD5RW34CA	LVR-IC	LDO, 3.4V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E35A	-	R1170D351A	LVR-IC	LDO, 3.5V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E35A	-	RD5RW35AA	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E35B	-	R1170D351B	LVR-IC	LDO, 3.5V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E35B	-	RD5RW35BA	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E35C	-	RD5RW35CA	LVR-IC	LDO, 3.5V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E36A	-	R1170D361A	LVR-IC	LDO, 3.6V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E36A	-	RD5RW36AA	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E36B	-	R1170D361B	LVR-IC	LDO, 3.6V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E36B	-	RD5RW36BA	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E36C	-	RD5RW36CA	LVR-IC	LDO, 3.6V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E37	-	OPA2137N	Op-IC	Dual, FET-Input, ±2.25..±18V, 1MHz	MSOP-8	47opd	OP4	8d	Bb
E37A	-	R1170D371A	LVR-IC	LDO, 3.7V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E37A	-	RD5RW37AA	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E37B	-	R1170D371B	LVR-IC	LDO, 3.7V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E37B	-	RD5RW37BA	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E37C	-	RD5RW37CA	LVR-IC	LDO, 3.7V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E38A	-	R1170D381A	LVR-IC	LDO, 3.8V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E38A	-	RD5RW38AA	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E38B	-	R1170D381B	LVR-IC	LDO, 3.8V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E38B	-	RD5RW38BA	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E38C	-	RD5RW38CA	LVR-IC	LDO, 3.8V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E39A	-	R1170D391A	LVR-IC	LDO, 3.9V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E39A	-	RD5RW39AA	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E39B	-	R1170D391B	LVR-IC	LDO, 3.9V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E39B	-	RD5RW39BA	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E39C	-	RD5RW39CA	LVR-IC	LDO, 3.9V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E4	-	NC7S02L6	CMOS-Log	2-input NOR gate	MPAK-6	33	Log2	7b	F
E40A	-	R1170D401A	LVR-IC	LDO, 4.0V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E40A	-	RD5RW40AA	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E40B	-	R1170D401B	LVR-IC	LDO, 4.0V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E40B	-	RD5RW40BA	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E40C	-	RD5RW40CA	LVR-IC	LDO, 4.0V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E41A	-	R1170D411A	LVR-IC	LDO, 4.1V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E41A	-	RD5RW41AA	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E41B	-	R1170D411B	LVR-IC	LDO, 4.1V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E41B	-	RD5RW41BA	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E41C	-	RD5RW41CA	LVR-IC	LDO, 4.1V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E42A	-	R1170D421A	LVR-IC	LDO, 4.2V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E42A	-	RD5RW42AA	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E42B	-	R1170D421B	LVR-IC	LDO, 4.2V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E42B	-	RD5RW42BA	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E42C	-	RD5RW42CA	LVR-IC	LDO, 4.2V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E43A	-	R1170D431A	LVR-IC	LDO, 4.3V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E43A	-	RD5RW43AA	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E43B	-	R1170D431B	LVR-IC	LDO, 4.3V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E43B	-	RD5RW43BA	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E43C	-	RD5RW43CA	LVR-IC	LDO, 4.3V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E44A	-	R1170D441A	LVR-IC	LDO, 4.4V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E44A	-	RD5RW44AA	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E44B	-	R1170D441B	LVR-IC	LDO, 4.4V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E44B	-	RD5RW44BA	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E44C	-	RD5RW44CA	LVR-IC	LDO, 4.4V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E45A	-	R1170D451A	LVR-IC	LDO, 4.5V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E45A	-	RD5RW45AA	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E45B	-	R1170D451B	LVR-IC	LDO, 4.5V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E45B	-	RD5RW45BA	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E45C	-	RD5RW45CA	LVR-IC	LDO, 4.5V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E46A	-	R1170D461A	LVR-IC	LDO, 4.6V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E46A	-	RD5RW46AA	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E46B	-	R1170D461B	LVR-IC	LDO, 4.6V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E46B	-	RD5RW46BA	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E46C	-	RD5RW46CA	LVR-IC	LDO, 4.6V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E47A	-	R1170D471A	LVR-IC	LDO, 4.7V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E47A	-	RD5RW47AA	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E47B	-	R1170D471B	LVR-IC	LDO, 4.7V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E47B	-	RD5RW47BA	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E47C	-	RD5RW47CA	LVR-IC	LDO, 4.7V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E48A	-	R1170D481A	LVR-IC	LDO, 4.8V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E48A	-	RD5RW48AA	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E48B	-	R1170D481B	LVR-IC	LDO, 4.8V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E48B	-	RD5RW48BA	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E48C	-	RD5RW48CA	LVR-IC	LDO, 4.8V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E49A	-	R1170D491A	LVR-IC	LDO, 4.9V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E49A	-	RD5RW49AA	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E49B	-	R1170D491B	LVR-IC	LDO, 4.9V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E49B	-	RD5RW49BA	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E49C	-	RD5RW49CA	LVR-IC	LDO, 4.9V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E5	-	TC1072-3.3VCH	LVR-IC	LDO, 3.3V±2%, 50mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
E50A	-	R1170D501A	LVR-IC	LDO, 5.0V±2%, 800mA, -CE	HSON-6	vr	VR4	7ea	Ric
E50A	-	RD5RW50AA	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E50B	-	R1170D501B	LVR-IC	LDO, 5.0V±2%, 800mA, +CE	HSON-6	vr	VR4	7ea	Ric
E50B	-	RD5RW50BA	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E50C	-	RD5RW50CA	LVR-IC	LDO, 5.0V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E51A	-	RD5RW51AA	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E51B	-	RD5RW51BA	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E51C	-	RD5RW51CA	LVR-IC	LDO, 5.1V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E52A	-	RD5RW52AA	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E52B	-	RD5RW52BA	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E52C	-	RD5RW52CA	LVR-IC	LDO, 5.2V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E53	-	OPA2353EA	Op-IC	Dual, H-Speed, Single-supply, Rail-to-Rail, 2.5..5.5V, 44MHz, 22V/µs	MSOP-8	47opd	OP4	8d	Bb
E53A	-	RD5RW53AA	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E53B	-	RD5RW53BA	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E53C	-	RD5RW53CA	LVR-IC	LDO, 5.3V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E54A	-	RD5RW54AA	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E54B	-	RD5RW54BA	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E54C	-	RD5RW54CA	LVR-IC	LDO, 5.4V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E55A	-	RD5RW55AA	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E55B	-	RD5RW55BA	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E55C	-	RD5RW55CA	LVR-IC	LDO, 5.5V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E56A	-	RD5RW56AA	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E56B	-	RD5RW56BA	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E56C	-	RD5RW56CA	LVR-IC	LDO, 5.6V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E57A	-	RD5RW57AA	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E57B	-	RD5RW57BA	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E57C	-	RD5RW57CA	LVR-IC	LDO, 5.7V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E58A	-	RD5RW58AA	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E58B	-	RD5RW58BA	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E58C	-	RD5RW58CA	LVR-IC	LDO, 5.8V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E59A	-	RD5RW59AA	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E59B	-	RD5RW59BA	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E59C	-	RD5RW59CA	LVR-IC	LDO, 5.9V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric
E60A	-	RD5RW60AA	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	SON1612-6	v1	VR4	7e	Ric
E60B	-	RD5RW60BA	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	SON1612-6	v1	VR4	7e	Ric
E60C	-	RD5RW60CA	LVR-IC	LDO, 6.0V±2%, 150mA	SON1612-6	v2	VR1	7e	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E7	-	TC1072-5.0VCH	LVR-IC	LDO, 5.0V±2%, 50mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
E8	-	R1160D081B	LVR-IC	LDO, 0.8V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
E8	-	TC1072-2.85VCH	LVR-IC	LDO, 2.85V±2%, 50mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
E9	-	R1160D091B	LVR-IC	LDO, 0.9V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
E9	-	TC1072-3.6VCH	LVR-IC	LDO, 3.6V±2%, 50mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
EA	-	RP152N001B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EB	-	ELM7SU04BW	CMOS-Log	Dual unbuffered inverters	SOT-26	33	Log77	7d	Elm
EB	-	RP152N002B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EC	-	RP152N003B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
ED	-	RP152N004B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EE	-	RP152N005B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EF	-	RP152N006B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EG	-	RP152N007B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EH	-	RP152N008B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EJ	-	RP152N009B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EK	-	RP152N010B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EL	-	RP152N011B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EM	-	RP152N012B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EN	-	RP152N013B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EP	-	RP152N014B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EQ	-	RP152N015B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
ER	-	RP152N016B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
ES	-	RP152N017B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
ET	-	RP152N018B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EU	-	RP152N019B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EV	-	RP152N020B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EW	-	RP152N021B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EX	-	RP152N022B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EY	-	AP1603W	DC-DC-IC	Step-up DC-DC converter for NiMH battery charge (3.3V)	SOT-23-6	33su	-	7b	Ana
EY	-	RP152N023B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EZ	-	RP152N024B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
EZ	-	TC1072-2.8VCH	LVR-IC	LDO, 2.8V±2%, 50mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
F	-	AG201-63G	MMIC	Buff/amp, DC..6GHz, 11dB (900MHz, 50Ω)	SOT-363	33a1	A1	7d	Wjc
F0	-	R1160D101B	LVR-IC	LDO, 1.0V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
F0	-	R5421N177C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=7.7V	SOT-23-6	xj	VBM1	7da	Ric
F0	-	TC1073-4.0VCH	LVR-IC	LDO, 4.0V±2%, 100mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
F00A	-	R1131D182A5	LVR-IC	LDO, 1.85V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F00B	-	R1131D182B5	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F00D	-	R1131D182D5	LVR-IC	LDO, 1.85V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F01A	-	R1131D282A5	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F01B	-	R1131D282B5	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F01D	-	R1131D282D5	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F020	-	R1515S020B	LVR-IC	2.0V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F021	-	R1515S021B	LVR-IC	2.1V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F022	-	R1515S022B	LVR-IC	2.2V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F023	-	R1515S023B	LVR-IC	2.3V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F024	-	R1515S024B	LVR-IC	2.4V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F025	-	R1515S025B	LVR-IC	2.5V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F026	-	R1515S026B	LVR-IC	2.6V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F027	-	R1515S027B	LVR-IC	2.7V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F028	-	R1515S028B	LVR-IC	2.8V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F029	-	R1515S029B	LVR-IC	2.9V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F02A	-	R1131D122A5	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F02B	-	R1131D122B5	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F02D	-	R1131D122D5	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F030	-	R1515S030B	LVR-IC	3.0V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F031	-	R1515S031B	LVR-IC	3.1V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F032	-	R1515S032B	LVR-IC	3.2V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F033	-	R1515S033B	LVR-IC	3.3V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F034	-	R1515S034B	LVR-IC	3.4V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F035	-	R1515S035B	LVR-IC	3.5V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F036	-	R1515S036B	LVR-IC	3.6V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F037	-	R1515S037B	LVR-IC	3.7V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F038	-	R1515S038B	LVR-IC	3.8V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F039	-	R1515S039B	LVR-IC	3.9V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F040	-	R1515S040B	LVR-IC	4.0V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F041	-	R1515S041B	LVR-IC	4.1V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F042	-	R1515S042B	LVR-IC	4.2V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F043	-	R1515S043B	LVR-IC	4.3V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F044	-	R1515S044B	LVR-IC	4.4V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F045	-	R1515S045B	LVR-IC	4.5V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F046	-	R1515S046B	LVR-IC	4.6V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F047	-	R1515S047B	LVR-IC	4.7V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F048	-	R1515S048B	LVR-IC	4.8V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F049	-	R1515S049B	LVR-IC	4.9V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F050	-	R1515S050B	LVR-IC	5.0V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F051	-	R1515S051B	LVR-IC	5.1V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F052	-	R1515S052B	LVR-IC	5.2V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F053	-	R1515S053B	LVR-IC	5.3V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F054	-	R1515S054B	LVR-IC	5.4V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F055	-	R1515S055B	LVR-IC	5.5V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F056	-	R1515S056B	LVR-IC	5.6V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F057	-	R1515S057B	LVR-IC	5.7V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F058	-	R1515S058B	LVR-IC	5.8V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F059	-	R1515S059B	LVR-IC	5.9V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F060	-	R1515S060B	LVR-IC	6.0V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F061	-	R1515S061B	LVR-IC	6.1V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F062	-	R1515S062B	LVR-IC	6.2V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F063	-	R1515S063B	LVR-IC	6.3V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F064	-	R1515S064B	LVR-IC	6.4V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F065	-	R1515S065B	LVR-IC	6.5V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F066	-	R1515S066B	LVR-IC	6.6V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F067	-	R1515S067B	LVR-IC	6.7V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F068	-	R1515S068B	LVR-IC	6.8V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F069	-	R1515S069B	LVR-IC	6.9V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F070	-	R1515S070B	LVR-IC	7.0V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F071	-	R1515S071B	LVR-IC	7.1V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F072	-	R1515S072B	LVR-IC	7.2V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F073	-	R1515S073B	LVR-IC	7.3V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F074	-	R1515S074B	LVR-IC	7.4V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F075	-	R1515S075B	LVR-IC	7.5V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F076	-	R1515S076B	LVR-IC	7.6V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F077	-	R1515S077B	LVR-IC	7.7V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F078	-	R1515S078B	LVR-IC	7.8V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F079	-	R1515S079B	LVR-IC	7.9V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F080	-	R1515S080B	LVR-IC	8.0V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F081	-	R1515S081B	LVR-IC	8.1V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F082	-	R1515S082B	LVR-IC	8.2V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F083	-	R1515S083B	LVR-IC	8.3V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F084	-	R1515S084B	LVR-IC	8.4V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F085	-	R1515S085B	LVR-IC	8.5V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F086	-	R1515S086B	LVR-IC	8.6V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F087	-	R1515S087B	LVR-IC	8.7V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F088	-	R1515S088B	LVR-IC	8.8V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F089	-	R1515S089B	LVR-IC	8.9V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F08A	-	R1131D082A	LVR-IC	LDO, 0.8V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F08B	-	R1131D082B	LVR-IC	LDO, 0.8V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F08D	-	R1131D082D	LVR-IC	LDO, 0.8V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F090	-	R1515S090B	LVR-IC	9.0V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F091	-	R1515S091B	LVR-IC	9.1V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F092	-	R1515S092B	LVR-IC	9.2V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F093	-	R1515S093B	LVR-IC	9.3V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F094	-	R1515S094B	LVR-IC	9.4V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F095	-	R1515S095B	LVR-IC	9.5V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F096	-	R1515S096B	LVR-IC	9.6V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F097	-	R1515S097B	LVR-IC	9.7V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F098	-	R1515S098B	LVR-IC	9.8V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F099	-	R1515S099B	LVR-IC	9.9V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F09A	-	R1131D092A	LVR-IC	LDO, 0.9V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F09B	-	R1131D092B	LVR-IC	LDO, 0.9V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F09D	-	R1131D092D	LVR-IC	LDO, 0.9V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F1	-	R1160D111B	LVR-IC	LDO, 1.1V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
F1	-	R5421N162C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=6.2V	SOT-23-6	xj	VBM1	7da	Ric
F1	-	TC1073-2.5VCH	LVR-IC	LDO, 2.5V±2%, 50mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
F100	-	R1515S100B	LVR-IC	10.0V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F101	-	R1515S101B	LVR-IC	10.1V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F102	-	R1515S102B	LVR-IC	10.2V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F103	-	R1515S103B	LVR-IC	10.3V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F104	-	R1515S104B	LVR-IC	10.4V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F105	-	R1515S105B	LVR-IC	10.5V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F106	-	R1515S106B	LVR-IC	10.6V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F107	-	R1515S107B	LVR-IC	10.7V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F108	-	R1515S108B	LVR-IC	10.8V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F109	-	R1515S109B	LVR-IC	10.9V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F10A	-	R1131D102A	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F10B	-	R1131D102B	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F10D	-	R1131D102D	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F110	-	R1515S110B	LVR-IC	11.0V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F111	-	R1515S111B	LVR-IC	11.1V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F112	-	R1515S112B	LVR-IC	11.2V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F113	-	R1515S113B	LVR-IC	11.3V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F114	-	R1515S114B	LVR-IC	11.4V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F115	-	R1515S115B	LVR-IC	11.5V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F116	-	R1515S116B	LVR-IC	11.6V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F117	-	R1515S117B	LVR-IC	11.7V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F118	-	R1515S118B	LVR-IC	11.8V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F119	-	R1515S119B	LVR-IC	11.9V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F11A	-	R1131D112A	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F11B	-	R1131D112B	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F11D	-	R1131D112D	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F120	-	R1515S120B	LVR-IC	12.0V±2%, 50mA, +CE	HSOP-6J	wh	VR4	7h	Ric
F12A	-	R1131D122A	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F12B	-	R1131D122B	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F12D	-	R1131D122D	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F13A	-	R1131D132A	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F13B	-	R1131D132B	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F13D	-	R1131D132D	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F14A	-	R1131D142A	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F14B	-	R1131D142B	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F14D	-	R1131D142D	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F15A	-	R1114D151A	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F15A	-	R1131D152A	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F15B	-	R1114D151B	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F15B	-	R1131D152B	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F15D	-	R1114D151D	LVR-IC	LDO, Low noise, 1.5V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F15D	-	R1131D152D	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F16A	-	R1114D161A	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F16A	-	R1131D162A	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F16B	-	R1114D161B	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F16B	-	R1131D162B	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F16D	-	R1114D161D	LVR-IC	LDO, Low noise, 1.6V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F16D	-	R1131D162D	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F17A	-	R1114D171A	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F17A	-	R1131D172A	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F17B	-	R1114D171B	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F17B	-	R1131D172B	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F17D	-	R1114D171D	LVR-IC	LDO, Low noise, 1.7V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F17D	-	R1131D172D	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F18A	-	R1114D181A	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F18A	-	R1131D182A	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F18B	-	R1114D181B	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F18B	-	R1131D182B	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F18D	-	R1114D181D	LVR-IC	LDO, Low noise, 1.8V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F18D	-	R1131D182D	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F19A	-	R1114D191A	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F19A	-	R1131D192A	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F19B	-	R1114D191B	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F19B	-	R1131D192B	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F19D	-	R1114D191D	LVR-IC	LDO, Low noise, 1.9V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F19D	-	R1131D192D	LVR-IC	LDO, 1.9V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F1N05	-	MMDF1N05E	n-MOSFET	V-MOS, Dual, 50V, 2A, <0.3Ω(1,5A)	SOP-8	47	-	8d	Mot
F2	-	R1160D121B	LVR-IC	LDO, 1.2V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
F2	-	R5421N148F	BM-IC	Li-Ion, over-charge/discharge protection, Vd=4.8V	SOT-23-6	xj	VBM1	7da	Ric
F2	-	RN1903FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=22k/22k	US6	33	TD3	7b	Tos
F2	-	TC1073-2.7VCH	LVR-IC	LDO, 2.7V±2%, 100mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
F20A	-	R1114D201A	LVR-IC	LDO, Low noise, 2.0V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F20A	-	R1131D202A	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F20B	-	R1114D201B	LVR-IC	LDO, Low noise, 2.0V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F20B	-	R1131D202B	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F20D	-	R1114D201D	LVR-IC	LDO, Low noise, 2.0V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F20D	-	R1131D202D	LVR-IC	LDO, 2.0V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F21A	-	R1114D211A	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F21A	-	R1131D212A	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F21B	-	R1114D211B	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F21B	-	R1131D212B	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F21D	-	R1114D211D	LVR-IC	LDO, Low noise, 2.1V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F21D	-	R1131D212D	LVR-IC	LDO, 2.1V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F22A	-	R1114D221A	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F22A	-	R1131D222A	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F22B	-	R1114D221B	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F22B	-	R1131D222B	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F22D	-	R1114D221D	LVR-IC	LDO, Low noise, 2.2V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F22D	-	R1131D222D	LVR-IC	LDO, 2.2V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F23A	-	R1114D231A	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F23A	-	R1131D232A	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F23B	-	R1114D231B	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F23B	-	R1131D232B	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F23D	-	R1114D231D	LVR-IC	LDO, Low noise, 2.3V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F23D	-	R1131D232D	LVR-IC	LDO, 2.3V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F24A	-	R1114D241A	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F24A	-	R1131D242A	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F24B	-	R1114D241B	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F24B	-	R1131D242B	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F24D	-	R1114D241D	LVR-IC	LDO, Low noise, 2.4V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F24D	-	R1131D242D	LVR-IC	LDO, 2.4V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F25A	-	R1114D251A	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F25A	-	R1131D252A	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F25B	-	R1114D251B	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F25B	-	R1131D252B	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F25D	-	R1114D251D	LVR-IC	LDO, Low noise, 2.5V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F25D	-	R1131D252D	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
f26	-	XC7WH126DC	CMOS-Log	Dual bus buffer with 3-state output	SOT765-1	55	Log54	8d	Nxp
f26	-	XC7WH126DP	CMOS-Log	Dual bus buffer with 3-state output	SOT505-2	47	Log54	8d	Nxp
F26A	-	R1114D261A	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F26A	-	R1131D262A	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F26B	-	R1114D261B	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F26B	-	R1131D262B	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F26D	-	R1114D261D	LVR-IC	LDO, Low noise, 2.6V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F26D	-	R1131D262D	LVR-IC	LDO, 2.6V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F27A	-	R1114D271A	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F27A	-	R1131D272A	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F27B	-	R1114D271B	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F27B	-	R1131D272B	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F27D	-	R1114D271D	LVR-IC	LDO, Low noise, 2.7V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F27D	-	R1131D272D	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F28A	-	R1114D281A	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F28A	-	R1131D282A	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F28B	-	R1114D281B	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F28B	-	R1131D282B	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F28D	-	R1114D281D	LVR-IC	LDO, Low noise, 2.8V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F28D	-	R1131D282D	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F29A	-	R1114D291A	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F29A	-	R1131D292A	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F29B	-	R1114D291B	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F29B	-	R1131D292B	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F29D	-	R1114D291D	LVR-IC	LDO, Low noise, 2.9V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F29D	-	R1131D292D	LVR-IC	LDO, 2.9V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F2N02E	-	MMDF2N02E	n-MOSFET	V-MOS, Dual, 25V, 3,6A, <0.1Ω	SOP-8	47	-	8d	Mot
F2P02E	-	MMDF2P02E	p-MOSFET	V-MOS, Dual, 25V, 2,5A, <0.25Ω	SOP-8	47	-	8d	Mot
F3	-	R1160D131B	LVR-IC	LDO, 1.3V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
F3	-	R5421N173C	BM-IC	Li-Ion, over-charge/discharge protection, Vd=7.3V	SOT-23-6	xj	VBM1	7da	Ric
F3	-	RN1904FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=47k/47k	US6	33	TD3	7b	Tos
F3	-	TC1073-3.0VCH	LVR-IC	LDO, 3.0V±2%, 100mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
F30A	-	R1114D301A	LVR-IC	LDO, Low noise, 3.0V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F30A	-	R1131D302A	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F30B	-	R1114D301B	LVR-IC	LDO, Low noise, 3.0V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F30B	-	R1131D302B	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F30D	-	R1114D301D	LVR-IC	LDO, Low noise, 3.0V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F30D	-	R1131D302D	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F31A	-	R1114D311A	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F31A	-	R1131D312A	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F31B	-	R1114D311B	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F31B	-	R1131D312B	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F31D	-	R1114D311D	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F31D	-	R1131D312D	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F32A	-	R1114D321A	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F32A	-	R1131D322A	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F32B	-	R1114D321B	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F32B	-	R1131D322B	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F32D	-	R1114D321D	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F32D	-	R1131D322D	LVR-IC	LDO, 3.2V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F33A	-	R1114D331A	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F33A	-	R1131D332A	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	HSON-6	hq	VR4	7ea	Ric
F33B	-	R1114D331B	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F33B	-	R1131D332B	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	HSON-6	hq	VR4	7ea	Ric
F33D	-	R1114D331D	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F33D	-	R1131D332D	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, CL	HSON-6	hq	VR4	7ea	Ric
F34A	-	R1114D341A	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F34B	-	R1114D341B	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F34D	-	R1114D341D	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F35A	-	R1114D351A	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F35B	-	R1114D351B	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F35D	-	R1114D351D	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F36A	-	R1114D361A	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F36B	-	R1114D361B	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F36D	-	R1114D361D	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F37A	-	R1114D371A	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F37B	-	R1114D371B	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F37D	-	R1114D371D	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F38A	-	R1114D381A	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F38B	-	R1114D381B	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F38D	-	R1114D381D	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F39A	-	R1114D391A	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F39B	-	R1114D391B	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F39D	-	R1114D391D	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F4	-	R1160D141B	LVR-IC	LDO, 1.4V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
F4	-	RN1905FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=2k2/47k	US6	33	TD3	7b	Tos
F40A	-	R1114D401A	LVR-IC	LDO, Low noise, 4.0V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F40B	-	R1114D401B	LVR-IC	LDO, Low noise, 4.0V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F40D	-	R1114D401D	LVR-IC	LDO, Low noise, 4.0V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F41A	-	R1114D281A5	LVR-IC	LDO, Low noise, 2.85V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F41B	-	R1114D281B5	LVR-IC	LDO, Low noise, 2.85V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F41D	-	R1114D281D5	LVR-IC	LDO, Low noise, 2.85V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F42A	-	R1114D181A5	LVR-IC	LDO, Low noise, 1.85V±2%, 150mA, -CE	SON1612-6	vra	VR4	7e	Ric
F42B	-	R1114D181B5	LVR-IC	LDO, Low noise, 1.85V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
F42D	-	R1114D181D5	LVR-IC	LDO, Low noise, 1.85V±2%, 150mA, +CE, CL	SON1612-6	vra	VR4	7e	Ric
F5	-	R1160D151B	LVR-IC	LDO, 1.5V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
F5	-	RN1906FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=4k7/47k	US6	33	TD3	7b	Tos
F5	-	TC1073-3.3VCH	LVR-IC	LDO, 3.3V±2%, 100mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
F6	-	R1160D161B	LVR-IC	LDO, 1.6V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
F6	-	RN1907FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=10k/47k	FS6	35	TD3	7b	Tos
F7	-	R1160D171B	LVR-IC	LDO, 1.7V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
F7	-	RN1908FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=22k/47k	FS6	35	TD3	7b	Tos
F7	-	TC1073-5.0VCH	LVR-IC	LDO, 5.0V±2%, 100mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
F8	-	R1131D081A	LVR-IC	LDO, 0.8V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
F8	-	R1160D181B	LVR-IC	LDO, 1.8V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
F8	-	RN1909FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=47k/22k	FS6	35	TD3	7b	Tos
F8	-	TC1073-2.85VCH	LVR-IC	LDO, 2.85V±2%, 100mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
F9	-	R1131D091A	LVR-IC	LDO, 0.9V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
F9	-	R1160D191B	LVR-IC	LDO, 1.9V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
F9	-	RN1910FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1=4k7	FS6	35	TD3	7b	Tos
F9	-	TC1073-3.6VCH	LVR-IC	LDO, 3.6V±2%, 100mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
fA	-	FP6121-AS6P	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
FA	-	RP152N025B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fB	-	FP6121-BS6P	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
FB	-	RP152N026B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fC	-	FP6121-CS6P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
FC	-	RP152N027B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fD	-	FP6121-DS6P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
FD	-	RP152N028B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
fE	-	FP6121-ES6P	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
FE	-	RP152N029B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fF	-	FP6121-FS6P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
FF	-	RN1911FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1=10k	FS6	35	TD3	7b	Tos
FF	-	RP152N030B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fF=	-	FP6121-FS6G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
fG	-	FP6121-GS6P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
FG	-	RP152N031B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fH	-	FP6121-HS6P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
FH	-	RP152N032B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fi	-	FP6121-IS9P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Fit
FJ	-	RP152N033B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fk	-	FP6121-JS6P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
FK	-	FP6121-NS6P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
FK	-	RP152N034B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
FL	-	AAT3221IJS-2.3	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky
FL	-	FP6121-OS6P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
FL	-	RP152N035B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fm	-	FP6121-JS9P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Fit
FM	-	AAT3221IJS-2.4	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky
FM	-	FP6121-NS9P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Fit
FM	-	RP152N036B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fn	-	FP6121-KS6P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
FN	-	FP6121-OS9P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Fit
FN	-	RP152N037B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
FP	-	PAM8301AAF	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 1.5W(5V/8Ω), shutdown	SOP-6	33	-	7b	Pam
FP	-	RP152N038B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
FQ	-	RP152N039B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fr	-	FP6121-KS9P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Fit
fR	-	FP6121-AS9P	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Fit
FR	-	RP152N040B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fS	-	FP6121-BS9P	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Fit
FS	-	RP152N041B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
ft	-	FP6121-LS6P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
fT	-	FP6121-CS9P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Fit
FT	-	FP6121-PS6P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
FT	-	RP152N042B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fu	-	FP6121-MS6P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
fU	-	FP6121-DS9P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Fit
FU	-	FP6121-PS9P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Fit
FU	-	RP152N043B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fv	-	FP6121-LS9P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Fit
fV	-	FP6121-ES9P	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Fit
FV	-	RP152N044B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fw	-	FP6121-MS9P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Fit
fW	-	FP6121-FS9P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Fit
FW	-	RP152N045B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fX	-	FP6121-GS9P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Fit
FX	-	RP152N046B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fY	-	FP6121-HS9P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	TSOT-23-6	33x5	VR19	7b	Fit
FY	-	RP152N047B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
fZ	-	FP6121-IS6P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Fit
FZ	-	RP152N048B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
FZ	-	TC1073-2.8VCH	LVR-IC	LDO, 2.8V±2%, 100mA, +CE, -Error	SOT-23-6	33uj	VR9	7d	Mcc
G0	-	R1131D101A	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
G0	-	R1160D201B	LVR-IC	LDO, 2.0V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
G00B	-	R1180D181B5	LVR-IC	LDO, 1.85V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G01A	-	R1172D181A5	LVR-IC	LDO, 1.85V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G01B	-	R1172D181B5	LVR-IC	LDO, 1.85V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G01B	-	RP131S121B5	LVR-IC	LDO, 1.25V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G01D	-	R1172D181D5	LVR-IC	LDO, 1.85V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G01D	-	RP131S121D5	LVR-IC	LDO, 1.25V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G02A	-	R1172D281A5	LVR-IC	LDO, 2.85V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G02B	-	R1172D281B5	LVR-IC	LDO, 2.85V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G02B	-	RP131S181B5	LVR-IC	LDO, 1.85V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G02D	-	R1172D281D5	LVR-IC	LDO, 2.85V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G02D	-	RP131S181D5	LVR-IC	LDO, 1.85V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G03B	-	RP131S281B5	LVR-IC	LDO, 2.85V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G03D	-	RP131S281D5	LVR-IC	LDO, 2.85V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G04B	-	RP131S101B5	LVR-IC	LDO, 1.05V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G04D	-	RP131S101D5	LVR-IC	LDO, 1.05V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G08	-	LM4808MM	Lin-IC	AF PA, 2..5.5V, 2x105mW(4V/16Ω)	SSOP-8	47	AFP6	8d	Nsc
G08A	-	R1172D081A	LVR-IC	LDO, 0.8V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G08B	-	R1172D081B	LVR-IC	LDO, 0.8V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G08B	-	RP131S081B	LVR-IC	LDO, 0.8V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G08D	-	R1172D081D	LVR-IC	LDO, 0.8V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G08D	-	RP131S081D	LVR-IC	LDO, 0.8V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G09	-	LM4809MM	Lin-IC	AF PA, 2..5.5V, 2x105mW(4V/16Ω), shutdown	MSOP-8	55	AFP7	8d	Nsc
G09A	-	R1172D091A	LVR-IC	LDO, 0.8V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G09B	-	R1172D091B	LVR-IC	LDO, 0.9V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G09B	-	RP131S091B	LVR-IC	LDO, 0.9V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G09D	-	R1172D091D	LVR-IC	LDO, 0.9V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G09D	-	RP131S091D	LVR-IC	LDO, 0.9V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G1	-	R1131D111A	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
G1	-	R1160D211B	LVR-IC	LDO, 2.1V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
G10	-	LM4810MM	Lin-IC	AF PA, 2..5.5V, 2x105mW(4V/16Ω), shutdown	SSOP-8	47	AFP16	8d	Nsc
G10A	-	R1172D101A	LVR-IC	LDO, 1.0V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G10B	-	R1172D101B	LVR-IC	LDO, 1.0V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G10B	-	RP131S101B	LVR-IC	LDO, 1.0V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G10D	-	R1172D101D	LVR-IC	LDO, 1.0V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G10D	-	RP131S101D	LVR-IC	LDO, 1.0V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G11A	-	R1172D111A	LVR-IC	LDO, 1.1V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G11B	-	R1172D111B	LVR-IC	LDO, 1.1V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G11B	-	RP131S111B	LVR-IC	LDO, 1.1V±1%, 1A	HSOP-6J	vtb	VR4	7h	Ric
G11D	-	R1172D111D	LVR-IC	LDO, 1.1V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G11D	-	RP131S111D	LVR-IC	LDO, 1.1V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G12A	-	R1172D121A	LVR-IC	LDO, 1.2V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G12B	-	R1172D121B	LVR-IC	LDO, 1.2V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G12B	-	R1180D121B	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G12B	-	RP131S121B	LVR-IC	LDO, 1.2V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G12C	-	R1180D121C	LVR-IC	LDO, 1.2V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G12D	-	R1172D121D	LVR-IC	LDO, 1.2V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G12D	-	RP131S121D	LVR-IC	LDO, 1.2V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G13A	-	R1172D131A	LVR-IC	LDO, 1.3V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G13B	-	R1172D131B	LVR-IC	LDO, 1.3V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G13B	-	R1180D131B	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G13B	-	RP131S131B	LVR-IC	LDO, 1.3V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G13C	-	R1180D131C	LVR-IC	LDO, 1.3V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G13D	-	R1172D131D	LVR-IC	LDO, 1.3V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G13D	-	RP131S131D	LVR-IC	LDO, 1.3V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G14A	-	R1172D141A	LVR-IC	LDO, 1.4V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G14B	-	R1172D141B	LVR-IC	LDO, 1.4V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G14B	-	R1180D141B	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G14B	-	RP131S141B	LVR-IC	LDO, 1.4V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G14C	-	R1180D141C	LVR-IC	LDO, 1.4V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G14D	-	R1172D141D	LVR-IC	LDO, 1.4V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G14D	-	RP131S141D	LVR-IC	LDO, 1.4V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G15A	-	R1172D151A	LVR-IC	LDO, 1.5V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G15B	-	R1172D151B	LVR-IC	LDO, 1.5V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G15B	-	R1180D151B	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G15B	-	RP131S151B	LVR-IC	LDO, 1.5V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G15C	-	R1180D151C	LVR-IC	LDO, 1.5V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G15D	-	R1172D151D	LVR-IC	LDO, 1.5V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G15D	-	RP131S151D	LVR-IC	LDO, 1.5V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G16A	-	R1172D161A	LVR-IC	LDO, 1.6V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G16B	-	R1172D161B	LVR-IC	LDO, 1.6V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G16B	-	R1180D161B	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G16B	-	RP131S161B	LVR-IC	LDO, 1.6V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G16C	-	R1180D161C	LVR-IC	LDO, 1.6V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G16D	-	R1172D161D	LVR-IC	LDO, 1.6V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G16D	-	RP131S161D	LVR-IC	LDO, 1.6V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G17A	-	R1172D171A	LVR-IC	LDO, 1.7V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G17B	-	R1172D171B	LVR-IC	LDO, 1.7V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G17B	-	R1180D171B	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G17B	-	RP131S171B	LVR-IC	LDO, 1.7V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G17C	-	R1180D171C	LVR-IC	LDO, 1.7V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G17D	-	R1172D171D	LVR-IC	LDO, 1.7V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G17D	-	RP131S171D	LVR-IC	LDO, 1.7V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G18A	-	R1172D181A	LVR-IC	LDO, 1.8V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G18B	-	R1172D181B	LVR-IC	LDO, 1.8V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G18B	-	R1180D181B	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G18B	-	RP131S181B	LVR-IC	LDO, 1.8V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G18C	-	R1180D181C	LVR-IC	LDO, 1.8V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G18D	-	R1172D181D	LVR-IC	LDO, 1.8V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G18D	-	RP131S181D	LVR-IC	LDO, 1.8V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G19	-	HWD2119MM	Lin-IC	AF PA, BTL, 2.5..5.5V, 3W(5V/3Ω), shutdown	SSOP-8	47	AFP11	8d	Csm
G19	-	LM4819M	Lin-IC	AF PA, BTL, 2..5.5V, 35mWW(3.5V/8Ω), shutdown	SOP-8	47	AFP11	8d	Nsc
G19A	-	R1172D191A	LVR-IC	LDO, 1.9V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G19B	-	R1172D191B	LVR-IC	LDO, 1.9V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G19B	-	R1180D191B	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G19B	-	RP131S191B	LVR-IC	LDO, 1.9V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G19C	-	R1180D191C	LVR-IC	LDO, 1.9V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G19D	-	R1172D191D	LVR-IC	LDO, 1.9V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G19D	-	RP131S191D	LVR-IC	LDO, 1.9V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G2	-	R1131D121A	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
G2	-	R1160D221B	LVR-IC	LDO, 2.2V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
G20A	-	R1172D201A	LVR-IC	LDO, 2.0V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G20B	-	R1172D201B	LVR-IC	LDO, 2.0V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G20B	-	R1180D201B	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G20B	-	RP131S201B	LVR-IC	LDO, 2.0V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G20C	-	R1180D201C	LVR-IC	LDO, 2.0V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G20D	-	R1172D201D	LVR-IC	LDO, 2.0V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G20D	-	RP131S201D	LVR-IC	LDO, 2.0V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G21A	-	R1172D211A	LVR-IC	LDO, 2.1V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G21B	-	R1172D211B	LVR-IC	LDO, 2.1V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G21B	-	R1180D211B	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G21B	-	RP131S211B	LVR-IC	LDO, 2.1V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G21C	-	R1180D211C	LVR-IC	LDO, 2.1V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G21D	-	R1172D211D	LVR-IC	LDO, 2.1V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G21D	-	RP131S211D	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G22A	-	R1172D221A	LVR-IC	LDO, 2.2V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G22B	-	R1172D221B	LVR-IC	LDO, 2.2V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G22B	-	R1180D221B	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G22B	-	RP131S221B	LVR-IC	LDO, 2.2V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G22C	-	R1180D221C	LVR-IC	LDO, 2.2V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G22D	-	R1172D221D	LVR-IC	LDO, 2.2V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G22D	-	RP131S221D	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G23A	-	R1172D231A	LVR-IC	LDO, 2.3V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G23B	-	R1172D231B	LVR-IC	LDO, 2.3V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G23B	-	R1180D231B	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G23B	-	RP131S231B	LVR-IC	LDO, 2.3V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G23C	-	R1180D231C	LVR-IC	LDO, 2.3V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G23D	-	R1172D231D	LVR-IC	LDO, 2.3V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G23D	-	RP131S231D	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G24A	-	R1172D241A	LVR-IC	LDO, 2.4V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G24B	-	R1172D241B	LVR-IC	LDO, 2.4V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G24B	-	R1180D241B	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G24B	-	RP131S241B	LVR-IC	LDO, 2.4V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G24C	-	R1180D241C	LVR-IC	LDO, 2.4V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G24D	-	R1172D241D	LVR-IC	LDO, 2.4V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G24D	-	RP131S241D	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G25A	-	R1172D251A	LVR-IC	LDO, 2.5V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G25B	-	R1172D251B	LVR-IC	LDO, 2.5V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G25B	-	R1180D251B	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G25B	-	RP131S251B	LVR-IC	LDO, 2.5V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G25C	-	R1180D251C	LVR-IC	LDO, 2.5V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G25D	-	R1172D251D	LVR-IC	LDO, 2.5V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G25D	-	RP131S251D	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G26	-	LM4820MM-6	Lin-IC	AF PA, BTL, 2..5.5V, 1W(5V/8Ω), shutdown	SSOP-8	47	AFP9	8d	Nsc
G26A	-	R1172D261A	LVR-IC	LDO, 2.6V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G26B	-	R1172D261B	LVR-IC	LDO, 2.6V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G26B	-	R1180D261B	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G26B	-	RP131S261B	LVR-IC	LDO, 2.6V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G26C	-	R1180D261C	LVR-IC	LDO, 2.6V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G26D	-	R1172D261D	LVR-IC	LDO, 2.6V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G26D	-	RP131S261D	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G27A	-	R1172D271A	LVR-IC	LDO, 2.7V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G27B	-	R1172D271B	LVR-IC	LDO, 2.7V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G27B	-	R1180D271B	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G27B	-	RP131S271B	LVR-IC	LDO, 2.7V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G27C	-	R1180D271C	LVR-IC	LDO, 2.7V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G27D	-	R1172D271D	LVR-IC	LDO, 2.7V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G27D	-	RP131S271D	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G28A	-	R1172D281A	LVR-IC	LDO, 2.8V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G28B	-	R1172D281B	LVR-IC	LDO, 2.8V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G28B	-	R1180D281B	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G28B	-	RP131S281B	LVR-IC	LDO, 2.8V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G28C	-	R1180D281C	LVR-IC	LDO, 2.8V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G28D	-	R1172D281D	LVR-IC	LDO, 2.8V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G28D	-	RP131S281D	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G29A	-	R1172D291A	LVR-IC	LDO, 2.9V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G29B	-	R1172D291B	LVR-IC	LDO, 2.9V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G29B	-	R1180D291B	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G29B	-	RP131S291B	LVR-IC	LDO, 2.9V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G29C	-	R1180D291C	LVR-IC	LDO, 2.9V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G29D	-	R1172D291D	LVR-IC	LDO, 2.9V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G29D	-	RP131S291D	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G3	-	R1131D131A	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
G3	-	R1160D231B	LVR-IC	LDO, 2.3V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
G30A	-	R1172D301A	LVR-IC	LDO, 3.0V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G30B	-	R1172D301B	LVR-IC	LDO, 3.0V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G30B	-	R1180D301B	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G30B	-	RP131S301B	LVR-IC	LDO, 3.0V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G30C	-	R1180D301C	LVR-IC	LDO, 3.0V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G30D	-	R1172D301D	LVR-IC	LDO, 3.0V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G30D	-	RP131S301D	LVR-IC	LDO, 3.0V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G31A	-	R1172D311A	LVR-IC	LDO, 3.1V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G31B	-	R1172D311B	LVR-IC	LDO, 3.1V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G31B	-	R1180D311B	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G31B	-	RP131S311B	LVR-IC	LDO, 3.1V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G31C	-	R1180D311C	LVR-IC	LDO, 3.1V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G31D	-	R1172D311D	LVR-IC	LDO, 3.1V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G31D	-	RP131S311D	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G32A	-	R1172D321A	LVR-IC	LDO, 3.2V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G32B	-	R1172D321B	LVR-IC	LDO, 3.2V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G32B	-	R1180D321B	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G32B	-	RP131S321B	LVR-IC	LDO, 3.2V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G32C	-	R1180D321C	LVR-IC	LDO, 3.2V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G32D	-	R1172D321D	LVR-IC	LDO, 3.2V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G32D	-	RP131S321D	LVR-IC	LDO, 3.2V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G33A	-	R1172D331A	LVR-IC	LDO, 3.3V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G33B	-	R1172D331B	LVR-IC	LDO, 3.3V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G33B	-	R1180D331B	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G33B	-	RP131S331B	LVR-IC	LDO, 3.3V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G33C	-	R1180D331C	LVR-IC	LDO, 3.3V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G33D	-	R1172D331D	LVR-IC	LDO, 3.3V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G33D	-	RP131S331D	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G34A	-	R1172D341A	LVR-IC	LDO, 3.4V±2%, 1A, -CE, -CE	HSON-6	vr	VR4	7ea	Ric
G34B	-	R1172D341B	LVR-IC	LDO, 3.4V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G34B	-	R1180D341B	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G34B	-	RP131S341B	LVR-IC	LDO, 3.4V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G34C	-	R1180D341C	LVR-IC	LDO, 3.4V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G34D	-	R1172D341D	LVR-IC	LDO, 3.4V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G34D	-	RP131S341D	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G35A	-	R1172D351A	LVR-IC	LDO, 3.5V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G35B	-	R1172D351B	LVR-IC	LDO, 3.5V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G35B	-	R1180D351B	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G35B	-	RP131S351B	LVR-IC	LDO, 3.5V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G35C	-	R1180D351C	LVR-IC	LDO, 3.5V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G35D	-	R1172D351D	LVR-IC	LDO, 3.5V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G35D	-	RP131S351D	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G36A	-	R1172D361A	LVR-IC	LDO, 3.6V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G36B	-	R1172D361B	LVR-IC	LDO, 3.6V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G36B	-	R1180D361B	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	SON1612-6	vra	VR4	7e	Ric
G36B	-	RP131S361B	LVR-IC	LDO, 3.6V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G36C	-	R1180D361C	LVR-IC	LDO, 3.6V±2%, 150mA	SON1612-6	yl	VR1	7e	Ric
G36D	-	R1172D361D	LVR-IC	LDO, 3.6V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G36D	-	RP131S361D	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G37	-	OPA337EA	Op-IC	Single-supply, CMOS, 2.5..5.5V, 120dB, 3MHz	MSOP-8	47opg	OP1	8d	Bb
G37A	-	R1172D371A	LVR-IC	LDO, 3.7V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G37B	-	R1172D371B	LVR-IC	LDO, 3.7V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G37B	-	RP131S371B	LVR-IC	LDO, 3.7V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G37D	-	R1172D371D	LVR-IC	LDO, 3.7V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G37D	-	RP131S371D	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G38A	-	R1172D381A	LVR-IC	LDO, 3.8V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G38B	-	R1172D381B	LVR-IC	LDO, 3.8V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G38B	-	RP131S381B	LVR-IC	LDO, 3.8V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G38D	-	R1172D381D	LVR-IC	LDO, 3.8V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G38D	-	RP131S381D	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G39A	-	R1172D391A	LVR-IC	LDO, 3.9V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G39B	-	R1172D391B	LVR-IC	LDO, 3.9V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G39B	-	RP131S391B	LVR-IC	LDO, 3.9V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G39D	-	R1172D391D	LVR-IC	LDO, 3.9V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G39D	-	RP131S391D	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G4	-	MBT35200M	Si-pnp	GP, 55V, 2A, 625mW, B=100..200, >100MHz	TSOP-6	33t4	-	7b	Ons
G4	-	R1131D141A	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
G4	-	R1160D241B	LVR-IC	LDO, 2.4V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
G40A	-	R1172D401A	LVR-IC	LDO, 4.0V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G40B	-	R1172D401B	LVR-IC	LDO, 4.0V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G40B	-	RP131S401B	LVR-IC	LDO, 4.0V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G40D	-	R1172D401D	LVR-IC	LDO, 4.0V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G40D	-	RP131S401D	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G41A	-	R1172D411A	LVR-IC	LDO, 4.1V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G41B	-	R1172D411B	LVR-IC	LDO, 4.1V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G41B	-	RP131S411B	LVR-IC	LDO, 4.1V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G41D	-	R1172D411D	LVR-IC	LDO, 4.1V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G41D	-	RP131S411D	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G42A	-	R1172D421A	LVR-IC	LDO, 4.2V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G42B	-	R1172D421B	LVR-IC	LDO, 4.2V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G42B	-	RP131S421B	LVR-IC	LDO, 4.2V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G42D	-	R1172D421D	LVR-IC	LDO, 4.2V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G42D	-	RP131S421D	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G43A	-	R1172D431A	LVR-IC	LDO, 4.3V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G43B	-	R1172D431B	LVR-IC	LDO, 4.3V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G43B	-	RP131S431B	LVR-IC	LDO, 4.3V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G43D	-	R1172D431D	LVR-IC	LDO, 4.3V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G43D	-	RP131S431D	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G44A	-	R1172D441A	LVR-IC	LDO, 4.4V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G44B	-	R1172D441B	LVR-IC	LDO, 4.4V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G44B	-	RP131S441B	LVR-IC	LDO, 4.4V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G44D	-	R1172D441D	LVR-IC	LDO, 4.4V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G44D	-	RP131S441D	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G45A	-	R1172D451A	LVR-IC	LDO, 4.5V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G45B	-	R1172D451B	LVR-IC	LDO, 4.5V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G45B	-	RP131S451B	LVR-IC	LDO, 4.5V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G45D	-	R1172D451D	LVR-IC	LDO, 4.5V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G45D	-	RP131S451D	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G46A	-	R1172D461A	LVR-IC	LDO, 4.6V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G46B	-	R1172D461B	LVR-IC	LDO, 4.6V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G46B	-	RP131S461B	LVR-IC	LDO, 4.6V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G46D	-	R1172D461D	LVR-IC	LDO, 4.6V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G46D	-	RP131S461D	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G47A	-	R1172D471A	LVR-IC	LDO, 4.7V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G47B	-	R1172D471B	LVR-IC	LDO, 4.7V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G47B	-	RP131S471B	LVR-IC	LDO, 4.7V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G47D	-	R1172D471D	LVR-IC	LDO, 4.7V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G47D	-	RP131S471D	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G48A	-	R1172D481A	LVR-IC	LDO, 4.8V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G48B	-	R1172D481B	LVR-IC	LDO, 4.8V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G48B	-	RP131S481B	LVR-IC	LDO, 4.8V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G48D	-	R1172D481D	LVR-IC	LDO, 4.8V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G48D	-	RP131S481D	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G49A	-	R1172D491A	LVR-IC	LDO, 4.9V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric
G49B	-	R1172D491B	LVR-IC	LDO, 4.9V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G49B	-	RP131S491B	LVR-IC	LDO, 4.9V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G49D	-	R1172D491D	LVR-IC	LDO, 4.9V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G49D	-	RP131S491D	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G5	-	R1131D151A	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
G5	-	R1160D251B	LVR-IC	LDO, 2.5V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
G50A	-	R1172D501A	LVR-IC	LDO, 5.0V±2%, 1A, -CE	HSON-6	vr	VR4	7ea	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G50B	-	R1172D501B	LVR-IC	LDO, 5.0V±2%, 1A, +CE	HSON-6	vr	VR4	7ea	Ric
G50B	-	RP131S501B	LVR-IC	LDO, 5.0V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G50D	-	R1172D501D	LVR-IC	LDO, 5.0V±2%, 1A, +CE, CL	HSON-6	vr	VR4	7ea	Ric
G50D	-	RP131S501D	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G51B	-	RP131S511B	LVR-IC	LDO, 5.1V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G51D	-	RP131S511D	LVR-IC	LDO, 5.1V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G52B	-	RP131S521B	LVR-IC	LDO, 5.2V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G52D	-	RP131S521D	LVR-IC	LDO, 5.2V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G53	-	LM4853MM	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.5W(5V/4Ω), shutdown	SSOP-10	60	AFP10	8d	Nsc
G53B	-	RP131S531B	LVR-IC	LDO, 5.3V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G53D	-	RP131S531D	LVR-IC	LDO, 5.3V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G54B	-	RP131S541B	LVR-IC	LDO, 5.4V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G54D	-	RP131S541D	LVR-IC	LDO, 5.4V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G55B	-	RP131S551B	LVR-IC	LDO, 5.5V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7h	Ric
G55D	-	RP131S551D	LVR-IC	LDO, 5.5V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7h	Ric
G6	-	NC7SV32FX	CMOS-Log	2-input OR gate	MPAK-6	33	Log4	7b	F
G6	-	NC7SV32L6	CMOS-Log	2-input OR gate	MPAK-6	33	Log4	7b	F
G6	-	R1131D161A	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
G6	-	R1160D261B	LVR-IC	LDO, 2.6V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
G7	-	R1131D171A	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
G7	-	R1160D271B	LVR-IC	LDO, 2.7V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
G71	-	LM4871MM	Lin-IC	AF PA, BTL, 2..5.5V, 1.1W(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Nsc
G71	-	SA4871XA	Lin-IC	AF PA, BTL, 2..5.5V, 1.1W(5V/8Ω), shutdown	MSOP-8	55	AFP12	8d	Sup
G75	-	LM4875MM	Lin-IC	AF PA, BTL, 2.7..5.5V, 750mW(5V/8Ω), DC volume	SSOP-8	47	AFP13	8d	Nsc
G79	-	LM4879MM	Lin-IC	AF PA, BTL, 2.2..5V, 1.1W(5V/8Ω), shutdown	SOP-10	60	AFP15	8d	Nsc
G8	-	R1131D181A	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
G8	-	R1160D281B	LVR-IC	LDO, 2.8V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
G9	-	R1131D191A	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
G9	-	R1160D291B	LVR-IC	LDO, 2.9V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
G90	-	LM4890MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Nsc
G90	-	SH4890MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Sit
G91	-	LM4891MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	SSOP-8	47	AFP11	8d	Nsc
G92	-	LM4892MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	SSOP-8	47	AFP23	8d	Nsc
G93	-	LM4893MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	SSOP-10	60	AFP15	8d	Nsc
G94	-	LM4894MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	SSOP-10	60	AFP19	8d	Nsc
G95	-	LM4895MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	SSOP-10	60	AFP20	8d	Nsc
G97	-	LM4897MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	SOP-10	60	AFP21	8d	Nsc
GA	-	µPA600T	Si-npn	Dual, 60V, 100mA, 250MHz	SOT-23-6	33tf	T1	7b	Nec
GA	-	RP152N001C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GA2	-	LM4889MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Nsc
GA3	-	LM4911MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 2x40mW(3V/16Ω), mute, shutdown	SSOP-10	60	AFP30	8d	Nsc
GA4	-	LM4903MM	Lin-IC	AF PA, BTL, 2..5.5V, 1W(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Nsc
GA5	-	LM4990MM	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Nsc
GA5	-	SH4990MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 2W(5V/4Ω), select shutdown	SSOP-10	60	AFP26	8d	Sit
GA7	-	LM4912MM	Lin-IC	AF PA, 2.2..5.5V, 2x40mW(5V/16Ω), mute, shutdown	SSOP-10	60	AFP31	8d	Nsc
GA8	-	LM4906MM	Lin-IC	AF PA, BTL, 2.5..5.5V, 1W(5V/8Ω), shutdown	SSOP-8	47	AFP28	8d	Nsc
GA9	-	LM4916MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 85mW(3V/32Ω), shutdown	SSOP-10	60	AFP32	8d	Nsc
GB	-	RP152N002C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GB2	-	LM4899MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	SSOP-10	60	AFP20	8d	Nsc
GB3	-	LM4898MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	SSOP-10	60	AFP19	8d	Nsc
GB4	-	LM4905MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Nsc
GB5	-	LM4908MM	Lin-IC	AF PA, 2.2..5.5V, 2x120mW(4V/16Ω)	SSOP-8	47	AFP6	8d	Nsc
GB7	-	LM4924MM	Lin-IC	AF PA, BTL, 1.5..3.6V, 2x40mW(5V/16Ω), mute, shutdown	MSOP-10	60	AFP33	8d	Nsc
GC	-	RP152N003C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GC0	-	LM4900MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 265mW(3V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Nsc
GC1	-	LM4901MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.6W(5V/8Ω), shutdown	SSOP-10	60	AFP26	8d	Nsc
GC2	-	LM4910MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 2x35mW(5V/32Ω), shutdown	SSOP-8	47	AFP29	8d	Nsc
GC3	-	LM4902MM	Lin-IC	AF PA, BTL, 2.2..5.5V, 265mW(3V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Nsc
GD	-	AAT3221IJS-2.7	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky
GD	-	RP152N004C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GE	-	RP152N005C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GF	-	RP152N006C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GG	-	NC7SZ08L6	CMOS-Log	2-input AND gate	MPAK-6	33	Log3	7b	F
GG	-	RP152N007C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GH	-	RP152N008C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GJ	-	RP152N009C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GK	-	RP152N010C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GL	-	RP152N011C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GM	-	RP152N012C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GN	-	RP152N013C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GP	-	AAT3221IJS-2.6	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky
GP	-	RP152N014C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GP33G	-	AIC1952-33GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP34G	-	AIC1952-34GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP35G	-	AIC1952-35GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP36G	-	AIC1952-36GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP37G	-	AIC1952-37GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP38G	-	AIC1952-38GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3AG	-	AIC1952-3AGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3BG	-	AIC1952-3BGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3CG	-	AIC1952-3CGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3DG	-	AIC1952-3DGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3EG	-	AIC1952-3EGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3FG	-	AIC1952-3FGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3GG	-	AIC1952-3GGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3HG	-	AIC1952-3HGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3IG	-	AIC1952-3IGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3JG	-	AIC1952-3JGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3KG	-	AIC1952-3KGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3LG	-	AIC1952-3LGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3MG	-	AIC1952-3MGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3NG	-	AIC1952-3NGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3OG	-	AIC1952-3OGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3PG	-	AIC1952-3PGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3QG	-	AIC1952-3QGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3RG	-	AIC1952-3RGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3SG	-	AIC1952-3SGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3TG	-	AIC1952-3TGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3UG	-	AIC1952-3UGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3VG	-	AIC1952-3VGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3WG	-	AIC1952-3WGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3XG	-	AIC1952-3XGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3YG	-	AIC1952-3YGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP3ZG	-	AIC1952-3ZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP43G	-	AIC1952-43GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP44G	-	AIC1952-44GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP45G	-	AIC1952-45GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP46G	-	AIC1952-46GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP47G	-	AIC1952-47GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP48G	-	AIC1952-48GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4AG	-	AIC1952-4AGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4BG	-	AIC1952-4BGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4CG	-	AIC1952-4CGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4DG	-	AIC1952-4DGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4EG	-	AIC1952-4EGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4FG	-	AIC1952-4FGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4GG	-	AIC1952-4GGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4HG	-	AIC1952-4HGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4IG	-	AIC1952-4IGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4JG	-	AIC1952-4JGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4KG	-	AIC1952-4KGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4LG	-	AIC1952-4LGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4MG	-	AIC1952-4MGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4NG	-	AIC1952-4NGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4OG	-	AIC1952-4OGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4PG	-	AIC1952-4PGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4QG	-	AIC1952-4QGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4RG	-	AIC1952-4RGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4SG	-	AIC1952-4SGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4TG	-	AIC1952-4TGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4UG	-	AIC1952-4UGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4VG	-	AIC1952-4VGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4WG	-	AIC1952-4WGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4XG	-	AIC1952-4XGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4YG	-	AIC1952-4YGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP4ZG	-	AIC1952-4ZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP53G	-	AIC1952-53GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP54G	-	AIC1952-54GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP55G	-	AIC1952-55GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP56G	-	AIC1952-56GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GP57G	-	AIC1952-57GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP58G	-	AIC1952-58GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5AG	-	AIC1952-5AGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5BG	-	AIC1952-5BGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5CG	-	AIC1952-5CGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5DG	-	AIC1952-5DGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5EG	-	AIC1952-5EGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5FG	-	AIC1952-5FGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5GG	-	AIC1952-5GGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5HG	-	AIC1952-5HGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5IG	-	AIC1952-5IGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5JG	-	AIC1952-5JGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5KG	-	AIC1952-5KGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5LG	-	AIC1952-5LGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5MG	-	AIC1952-5MGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5NG	-	AIC1952-5NGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5OG	-	AIC1952-5OGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5PG	-	AIC1952-5PGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5QG	-	AIC1952-5QGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5RG	-	AIC1952-5RGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5SG	-	AIC1952-5SGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5TG	-	AIC1952-5TGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5UG	-	AIC1952-5UGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5VG	-	AIC1952-5VGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5WG	-	AIC1952-5WGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5XG	-	AIC1952-5XGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5YG	-	AIC1952-5YGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP5ZG	-	AIC1952-5ZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP63G	-	AIC1952-63GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP64G	-	AIC1952-64GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP65G	-	AIC1952-65GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP66G	-	AIC1952-66GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP67G	-	AIC1952-67GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP68G	-	AIC1952-68GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6AG	-	AIC1952-6AGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6BG	-	AIC1952-6BGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6CG	-	AIC1952-6CGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6DG	-	AIC1952-6DGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6EG	-	AIC1952-6EGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6FG	-	AIC1952-6FGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6GG	-	AIC1952-6GGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6HG	-	AIC1952-6HGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6IG	-	AIC1952-6IGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6JG	-	AIC1952-6JGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6KG	-	AIC1952-6KGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6LG	-	AIC1952-6LGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6MG	-	AIC1952-6MGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6NG	-	AIC1952-6NGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6OG	-	AIC1952-6OGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6PG	-	AIC1952-6PGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6QG	-	AIC1952-6QGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6RG	-	AIC1952-6RGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6SG	-	AIC1952-6SGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6TG	-	AIC1952-6TGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6UG	-	AIC1952-6UGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6VG	-	AIC1952-6VGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6WG	-	AIC1952-6WGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6XG	-	AIC1952-6XGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6YG	-	AIC1952-6YGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP6ZG	-	AIC1952-6ZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP73G	-	AIC1952-73GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP74G	-	AIC1952-74GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP75G	-	AIC1952-75GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP76G	-	AIC1952-76GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP77G	-	AIC1952-77GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP78G	-	AIC1952-78GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7AG	-	AIC1952-7AGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7BG	-	AIC1952-7BGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7CG	-	AIC1952-7CGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7DG	-	AIC1952-7DGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GP7EG	-	AIC1952-7EGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7FG	-	AIC1952-7FGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7GG	-	AIC1952-7GGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7HG	-	AIC1952-7HGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7IG	-	AIC1952-7IGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7JG	-	AIC1952-7JGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7KG	-	AIC1952-7KGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7LG	-	AIC1952-7LGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7MG	-	AIC1952-7MGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7NG	-	AIC1952-7NGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7OG	-	AIC1952-7OGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7PG	-	AIC1952-7PGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7QG	-	AIC1952-7QGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7RG	-	AIC1952-7RGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7SG	-	AIC1952-7SGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7TG	-	AIC1952-7TGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7UG	-	AIC1952-7UGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7VG	-	AIC1952-7VGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7WG	-	AIC1952-7WGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7XG	-	AIC1952-7XGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7YG	-	AIC1952-7YGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP7ZG	-	AIC1952-7ZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP83G	-	AIC1952-83GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP84G	-	AIC1952-84GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP85G	-	AIC1952-85GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP86G	-	AIC1952-86GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP87G	-	AIC1952-87GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP88G	-	AIC1952-88GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8AG	-	AIC1952-8AGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8BG	-	AIC1952-8BGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8CG	-	AIC1952-8CGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8DG	-	AIC1952-8DGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8EG	-	AIC1952-8EGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8FG	-	AIC1952-8FGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8GG	-	AIC1952-8GGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8HG	-	AIC1952-8HGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8IG	-	AIC1952-8IGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8JG	-	AIC1952-8JGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8KG	-	AIC1952-8KGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8LG	-	AIC1952-8LGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8MG	-	AIC1952-8MGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8NG	-	AIC1952-8NGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8OG	-	AIC1952-8OGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8PG	-	AIC1952-8PGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8QG	-	AIC1952-8QGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8RG	-	AIC1952-8RGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8SG	-	AIC1952-8SGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8TG	-	AIC1952-8TGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8UG	-	AIC1952-8UGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8VG	-	AIC1952-8VGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8WG	-	AIC1952-8WGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8XG	-	AIC1952-8XGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8YG	-	AIC1952-8YGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GP8ZG	-	AIC1952-8ZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPA3G	-	AIC1952-A3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPA4G	-	AIC1952-A4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPA5G	-	AIC1952-A5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPA6G	-	AIC1952-A6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPA7G	-	AIC1952-A7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPA8G	-	AIC1952-A8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAAG	-	AIC1952-AAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPABG	-	AIC1952-ABGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPACG	-	AIC1952-ACGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPADG	-	AIC1952-ADGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAEG	-	AIC1952-AEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAFG	-	AIC1952-AFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAGG	-	AIC1952-AGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAHG	-	AIC1952-AHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAIG	-	AIC1952-AIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAJG	-	AIC1952-AJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GPAKG	-	AIC1952-AKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPALG	-	AIC1952-ALGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAMG	-	AIC1952-AMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPANG	-	AIC1952-ANGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAOG	-	AIC1952-AOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAPG	-	AIC1952-APGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAQG	-	AIC1952-AQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPARG	-	AIC1952-ARGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPASG	-	AIC1952-ASGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPATG	-	AIC1952-ATGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAUG	-	AIC1952-AUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAVG	-	AIC1952-AVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAWG	-	AIC1952-AWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAXG	-	AIC1952-AXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAYG	-	AIC1952-AYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPAZG	-	AIC1952-AZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPB3G	-	AIC1952-B3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPB4G	-	AIC1952-B4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPB5G	-	AIC1952-B5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPB6G	-	AIC1952-B6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPB7G	-	AIC1952-B7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPB8G	-	AIC1952-B8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBAG	-	AIC1952-BAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBBG	-	AIC1952-BBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBCG	-	AIC1952-BCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBDG	-	AIC1952-BDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBEG	-	AIC1952-BEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBFG	-	AIC1952-BFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBGG	-	AIC1952-BGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBHG	-	AIC1952-BHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBIG	-	AIC1952-BIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBJG	-	AIC1952-BJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBKG	-	AIC1952-BKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBLG	-	AIC1952-BLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBMG	-	AIC1952-BMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBNG	-	AIC1952-BNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBOG	-	AIC1952-BOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBPG	-	AIC1952-BPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBQG	-	AIC1952-BQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBRG	-	AIC1952-BRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBSG	-	AIC1952-BSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBTG	-	AIC1952-BTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBUG	-	AIC1952-BUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBVG	-	AIC1952-BVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBWG	-	AIC1952-BWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBXG	-	AIC1952-BXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBYG	-	AIC1952-BYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPBZG	-	AIC1952-BZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPC3G	-	AIC1952-C3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPC4G	-	AIC1952-C4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPC5G	-	AIC1952-C5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPC6G	-	AIC1952-C6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPC7G	-	AIC1952-C7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPC8G	-	AIC1952-C8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCAG	-	AIC1952-CAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCBG	-	AIC1952-CBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCCG	-	AIC1952-CCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCDG	-	AIC1952-CDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCEG	-	AIC1952-CEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCFG	-	AIC1952-CFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCGG	-	AIC1952-CGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCHG	-	AIC1952-CHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCIG	-	AIC1952-CIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCJG	-	AIC1952-CJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCKG	-	AIC1952-CKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCLG	-	AIC1952-CLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCMG	-	AIC1952-CMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCNG	-	AIC1952-CNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCOG	-	AIC1952-COGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCPG	-	AIC1952-CPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GPCQG	-	AIC1952-CQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCRG	-	AIC1952-CRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCSG	-	AIC1952-CSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCTG	-	AIC1952-CTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCUG	-	AIC1952-CUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCVG	-	AIC1952-CVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCWG	-	AIC1952-CWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCXG	-	AIC1952-CXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCYG	-	AIC1952-CYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPCZG	-	AIC1952-CZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPD3G	-	AIC1952-D3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPD4G	-	AIC1952-D4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPD5G	-	AIC1952-D5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPD6G	-	AIC1952-D6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPD7G	-	AIC1952-D7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPD8G	-	AIC1952-D8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDAG	-	AIC1952-DAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDBG	-	AIC1952-DBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDCG	-	AIC1952-DCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDDG	-	AIC1952-DDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDEG	-	AIC1952-DEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDFG	-	AIC1952-DFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDGG	-	AIC1952-DGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDHG	-	AIC1952-DHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDIG	-	AIC1952-DIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDJG	-	AIC1952-DJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDKG	-	AIC1952-DKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDLG	-	AIC1952-DLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDMG	-	AIC1952-DMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDNG	-	AIC1952-DNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDOG	-	AIC1952-DOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDPG	-	AIC1952-DPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDQG	-	AIC1952-DQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDRG	-	AIC1952-DRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDSG	-	AIC1952-DSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDTG	-	AIC1952-DTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDUG	-	AIC1952-DUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDVG	-	AIC1952-DVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDWG	-	AIC1952-DWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDXG	-	AIC1952-DXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDYG	-	AIC1952-DYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPDZG	-	AIC1952-DZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPE3G	-	AIC1952-E3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPE4G	-	AIC1952-E4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPE5G	-	AIC1952-E5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPE6G	-	AIC1952-E6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPE7G	-	AIC1952-E7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPE8G	-	AIC1952-E8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEAG	-	AIC1952-EAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEBG	-	AIC1952-EBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPECG	-	AIC1952-ECGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEDG	-	AIC1952-EDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEEG	-	AIC1952-EEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEFG	-	AIC1952-EFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEGG	-	AIC1952-EGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEHG	-	AIC1952-EHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEIG	-	AIC1952-EIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEJG	-	AIC1952-EJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEKG	-	AIC1952-EKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPELG	-	AIC1952-ELGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEMG	-	AIC1952-EMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPENG	-	AIC1952-ENGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEOG	-	AIC1952-EOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEPG	-	AIC1952-EPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEQG	-	AIC1952-EQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPERG	-	AIC1952-ERGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPESG	-	AIC1952-ESGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPETG	-	AIC1952-ETGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEUG	-	AIC1952-EUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEVG	-	AIC1952-EVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GPEWG	-	AIC1952-EWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEXG	-	AIC1952-EXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEYG	-	AIC1952-EYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPEZG	-	AIC1952-EZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPF3G	-	AIC1952-F3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPF4G	-	AIC1952-F4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPF5G	-	AIC1952-F5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPF6G	-	AIC1952-F6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPF7G	-	AIC1952-F7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPF8G	-	AIC1952-F8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFAG	-	AIC1952-FAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFBG	-	AIC1952-FBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFCG	-	AIC1952-FCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFDG	-	AIC1952-FDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFEG	-	AIC1952-FEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFFG	-	AIC1952-FFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFGG	-	AIC1952-FGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFHG	-	AIC1952-FHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFIG	-	AIC1952-FIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFJG	-	AIC1952-FJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFKG	-	AIC1952-FKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFLG	-	AIC1952-FLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFMG	-	AIC1952-FMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFNG	-	AIC1952-FNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFOG	-	AIC1952-FOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFPG	-	AIC1952-FPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFQG	-	AIC1952-FQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFRG	-	AIC1952-FRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFSG	-	AIC1952-FSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFTG	-	AIC1952-FTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFUG	-	AIC1952-FUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFVG	-	AIC1952-FVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFWG	-	AIC1952-FWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFXG	-	AIC1952-FXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFYG	-	AIC1952-FYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPFZG	-	AIC1952-FZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPG3G	-	AIC1952-G3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPG4G	-	AIC1952-G4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPG5G	-	AIC1952-G5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPG6G	-	AIC1952-G6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPG7G	-	AIC1952-G7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPG8G	-	AIC1952-G8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGAG	-	AIC1952-GAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGBG	-	AIC1952-GBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGCG	-	AIC1952-GCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGDG	-	AIC1952-GDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGEG	-	AIC1952-GEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGFG	-	AIC1952-GFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGGG	-	AIC1952-GGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGHG	-	AIC1952-GHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGIG	-	AIC1952-GIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGJG	-	AIC1952-GJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGKG	-	AIC1952-GKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGLG	-	AIC1952-GLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGMG	-	AIC1952-GMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGNG	-	AIC1952-GNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGOG	-	AIC1952-GOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGPG	-	AIC1952-GPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGQG	-	AIC1952-GQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGRG	-	AIC1952-GRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGSG	-	AIC1952-GSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGTG	-	AIC1952-GTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGUG	-	AIC1952-GUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGVG	-	AIC1952-GVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGWG	-	AIC1952-GWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGXG	-	AIC1952-GXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGYG	-	AIC1952-GYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPGZG	-	AIC1952-GZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPH3G	-	AIC1952-H3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPH4G	-	AIC1952-H4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GPH5G	-	AIC1952-H5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPH6G	-	AIC1952-H6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPH7G	-	AIC1952-H7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPH8G	-	AIC1952-H8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHAG	-	AIC1952-HAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHBG	-	AIC1952-HBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHCG	-	AIC1952-HCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHDG	-	AIC1952-HDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHEG	-	AIC1952-HEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHFG	-	AIC1952-HFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHGG	-	AIC1952-HGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHHG	-	AIC1952-HHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHIG	-	AIC1952-HIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHJG	-	AIC1952-HJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHKG	-	AIC1952-HKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHLG	-	AIC1952-HLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHMG	-	AIC1952-HMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHNG	-	AIC1952-HNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHOG	-	AIC1952-HOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHPG	-	AIC1952-HPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHQG	-	AIC1952-HQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHRG	-	AIC1952-HRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHSG	-	AIC1952-HSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHTG	-	AIC1952-HTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHUG	-	AIC1952-HUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHVG	-	AIC1952-HVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHWG	-	AIC1952-HWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHXG	-	AIC1952-HXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHYG	-	AIC1952-HYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPHZG	-	AIC1952-HZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPI3G	-	AIC1952-I3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPI4G	-	AIC1952-I4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPI5G	-	AIC1952-I5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPI6G	-	AIC1952-I6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPI7G	-	AIC1952-I7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPI8G	-	AIC1952-I8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIAG	-	AIC1952-IAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIBG	-	AIC1952-IBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPICG	-	AIC1952-ICGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIDG	-	AIC1952-IDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIEG	-	AIC1952-IEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIFG	-	AIC1952-IFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIGG	-	AIC1952-IGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIHG	-	AIC1952-IHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIIG	-	AIC1952-IIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIJG	-	AIC1952-IJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIKG	-	AIC1952-IKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPILG	-	AIC1952-ILGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIMG	-	AIC1952-IMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPING	-	AIC1952-INGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIOG	-	AIC1952-IOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIPG	-	AIC1952-IPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIQG	-	AIC1952-IQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIRG	-	AIC1952-IRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPISG	-	AIC1952-ISGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPITG	-	AIC1952-ITGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIUG	-	AIC1952-IUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIVG	-	AIC1952-IVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIWG	-	AIC1952-IWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIXG	-	AIC1952-IXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIYG	-	AIC1952-IYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPIZG	-	AIC1952-IZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJ3G	-	AIC1952-J3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJ4G	-	AIC1952-J4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJ5G	-	AIC1952-J5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJ6G	-	AIC1952-J6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJ7G	-	AIC1952-J7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJ8G	-	AIC1952-J8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJAG	-	AIC1952-JAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJBG	-	AIC1952-JBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GPJCG	-	AIC1952-JCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJDG	-	AIC1952-JDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJEG	-	AIC1952-JEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJFG	-	AIC1952-JFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJGG	-	AIC1952-JGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJHG	-	AIC1952-JHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJIG	-	AIC1952-JIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJJG	-	AIC1952-JJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJKG	-	AIC1952-JKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJLG	-	AIC1952-JLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJMG	-	AIC1952-JMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJNG	-	AIC1952-JNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJOG	-	AIC1952-JOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJPG	-	AIC1952-JPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJQG	-	AIC1952-JQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJRG	-	AIC1952-JRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJSG	-	AIC1952-JSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJTG	-	AIC1952-JTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJUG	-	AIC1952-JUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJVG	-	AIC1952-JVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJWG	-	AIC1952-JWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJXG	-	AIC1952-JXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJYG	-	AIC1952-JYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPJZG	-	AIC1952-JZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPK3G	-	AIC1952-K3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPK4G	-	AIC1952-K4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPK5G	-	AIC1952-K5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPK6G	-	AIC1952-K6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPK7G	-	AIC1952-K7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPK8G	-	AIC1952-K8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKAG	-	AIC1952-KAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKBG	-	AIC1952-KBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKCG	-	AIC1952-KCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKDG	-	AIC1952-KDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKEG	-	AIC1952-KEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKFG	-	AIC1952-KFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKGG	-	AIC1952-KGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKHG	-	AIC1952-KHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKIG	-	AIC1952-KIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKJG	-	AIC1952-KJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKKG	-	AIC1952-KKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKLG	-	AIC1952-KLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKMG	-	AIC1952-KMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKNG	-	AIC1952-KNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKOG	-	AIC1952-KOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKPG	-	AIC1952-KPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKQG	-	AIC1952-KQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKRG	-	AIC1952-KRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKSG	-	AIC1952-KSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKTG	-	AIC1952-KTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKUG	-	AIC1952-KUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKVG	-	AIC1952-KVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKWG	-	AIC1952-KWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKXG	-	AIC1952-KXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKYG	-	AIC1952-KYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPKZG	-	AIC1952-KZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPL3G	-	AIC1952-L3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPL4G	-	AIC1952-L4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPL5G	-	AIC1952-L5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPL6G	-	AIC1952-L6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPL7G	-	AIC1952-L7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPL8G	-	AIC1952-L8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLAG	-	AIC1952-LAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLBG	-	AIC1952-LBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLCG	-	AIC1952-LCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLDG	-	AIC1952-LDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLEG	-	AIC1952-LEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLFG	-	AIC1952-LFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLGG	-	AIC1952-LGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLHG	-	AIC1952-LHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GPLIG	-	AIC1952-LIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLJG	-	AIC1952-LJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLKG	-	AIC1952-LKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLLG	-	AIC1952-LLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLMG	-	AIC1952-LMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLNG	-	AIC1952-LNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLOG	-	AIC1952-LOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLPG	-	AIC1952-LPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLQG	-	AIC1952-LQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLRG	-	AIC1952-LRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLSG	-	AIC1952-LSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLTG	-	AIC1952-LTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLUG	-	AIC1952-LUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLVG	-	AIC1952-LVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLWG	-	AIC1952-LWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLXG	-	AIC1952-LXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLYG	-	AIC1952-LYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPLZG	-	AIC1952-LZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPM3G	-	AIC1952-M3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPM4G	-	AIC1952-M4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPM5G	-	AIC1952-M5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPM6G	-	AIC1952-M6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPM7G	-	AIC1952-M7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPM8G	-	AIC1952-M8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMAG	-	AIC1952-MAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMBG	-	AIC1952-MBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMCG	-	AIC1952-MCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMDG	-	AIC1952-MDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMEG	-	AIC1952-MEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMFG	-	AIC1952-MFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMGG	-	AIC1952-MGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMHG	-	AIC1952-MHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMIG	-	AIC1952-MIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMJG	-	AIC1952-MJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMKG	-	AIC1952-MKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMLG	-	AIC1952-MLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMMG	-	AIC1952-MMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMNG	-	AIC1952-MNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMOG	-	AIC1952-MOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMPG	-	AIC1952-MPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMQG	-	AIC1952-MQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMRG	-	AIC1952-MRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMSG	-	AIC1952-MSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMTG	-	AIC1952-MTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMUG	-	AIC1952-MUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMVG	-	AIC1952-MVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMWG	-	AIC1952-MWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMXG	-	AIC1952-MXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMYG	-	AIC1952-MYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPMZG	-	AIC1952-MZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPN3G	-	AIC1952-N3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPN4G	-	AIC1952-N4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPN5G	-	AIC1952-N5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPN6G	-	AIC1952-N6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPN7G	-	AIC1952-N7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPN8G	-	AIC1952-N8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNAG	-	AIC1952-NAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNBG	-	AIC1952-NBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNCG	-	AIC1952-NCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNDG	-	AIC1952-NDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNEG	-	AIC1952-NEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNFG	-	AIC1952-NFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNGG	-	AIC1952-NGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNHG	-	AIC1952-NHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNIG	-	AIC1952-NIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNJG	-	AIC1952-NJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNKG	-	AIC1952-NKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNLG	-	AIC1952-NLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNMG	-	AIC1952-NMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNNG	-	AIC1952-NNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GPNOG	-	AIC1952-NOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNPG	-	AIC1952-NPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNQG	-	AIC1952-NQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNRG	-	AIC1952-NRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNSG	-	AIC1952-NSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNTG	-	AIC1952-NTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNUG	-	AIC1952-NUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNVG	-	AIC1952-NVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNWG	-	AIC1952-NWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNXG	-	AIC1952-NXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNYG	-	AIC1952-NYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPNZG	-	AIC1952-NZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPO3G	-	AIC1952-O3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPO4G	-	AIC1952-O4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPO5G	-	AIC1952-O5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPO6G	-	AIC1952-O6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPO7G	-	AIC1952-O7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPO8G	-	AIC1952-O8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOAG	-	AIC1952-OAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOBG	-	AIC1952-OBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOCG	-	AIC1952-OCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPODG	-	AIC1952-ODGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOEG	-	AIC1952-OEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOFG	-	AIC1952-OFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOGG	-	AIC1952-OGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOHG	-	AIC1952-OHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOIG	-	AIC1952-OIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOJG	-	AIC1952-OJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOKG	-	AIC1952-OKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOLG	-	AIC1952-OLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOMG	-	AIC1952-OMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPONG	-	AIC1952-ONGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOOG	-	AIC1952-OOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOPG	-	AIC1952-OPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOQG	-	AIC1952-OQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPORG	-	AIC1952-ORGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOSG	-	AIC1952-OSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOTG	-	AIC1952-OTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOUG	-	AIC1952-OUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOVG	-	AIC1952-OVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOWG	-	AIC1952-OWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOXG	-	AIC1952-OXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOYG	-	AIC1952-OYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPOZG	-	AIC1952-OZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPP3G	-	AIC1952-P3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPP4G	-	AIC1952-P4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPP5G	-	AIC1952-P5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPP6G	-	AIC1952-P6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPP7G	-	AIC1952-P7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPP8G	-	AIC1952-P8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPAG	-	AIC1952-PAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPBG	-	AIC1952-PBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPCG	-	AIC1952-PCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPDG	-	AIC1952-PDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPEG	-	AIC1952-PEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPFG	-	AIC1952-PFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPGG	-	AIC1952-PGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPHG	-	AIC1952-PHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPIG	-	AIC1952-PIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPJG	-	AIC1952-PJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPKG	-	AIC1952-PKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPLG	-	AIC1952-PLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPMG	-	AIC1952-PMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPNG	-	AIC1952-PNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPOG	-	AIC1952-POGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPPG	-	AIC1952-PPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPQG	-	AIC1952-PQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPRG	-	AIC1952-PRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPSG	-	AIC1952-PSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPTG	-	AIC1952-PTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GPPUG	-	AIC1952-PUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPVG	-	AIC1952-PVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPWG	-	AIC1952-PWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPXG	-	AIC1952-PXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPYG	-	AIC1952-PYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPPZG	-	AIC1952-PZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQ3G	-	AIC1952-Q3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQ4G	-	AIC1952-Q4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQ5G	-	AIC1952-Q5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQ6G	-	AIC1952-Q6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQ7G	-	AIC1952-Q7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQ8G	-	AIC1952-Q8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQAG	-	AIC1952-QAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQBG	-	AIC1952-QBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQCG	-	AIC1952-QCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQDG	-	AIC1952-QDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQEG	-	AIC1952-QEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQFG	-	AIC1952-QFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQGG	-	AIC1952-QGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQHG	-	AIC1952-QHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQIG	-	AIC1952-QIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQJG	-	AIC1952-QJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQKG	-	AIC1952-QKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQLG	-	AIC1952-QLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQMG	-	AIC1952-QMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQNG	-	AIC1952-QNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQOG	-	AIC1952-QOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQPG	-	AIC1952-QPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQQG	-	AIC1952-QQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQRG	-	AIC1952-QRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQSG	-	AIC1952-QSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQTG	-	AIC1952-QTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQUG	-	AIC1952-QUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQVG	-	AIC1952-QVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQWG	-	AIC1952-QWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQXG	-	AIC1952-QXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQYG	-	AIC1952-QYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPQZG	-	AIC1952-QZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPR3G	-	AIC1952-R3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPR4G	-	AIC1952-R4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPR5G	-	AIC1952-R5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPR6G	-	AIC1952-R6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPR7G	-	AIC1952-R7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPR8G	-	AIC1952-R8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRAG	-	AIC1952-RAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRBG	-	AIC1952-RBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRCG	-	AIC1952-RCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRDG	-	AIC1952-RDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPREG	-	AIC1952-REGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRFG	-	AIC1952-RFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRGG	-	AIC1952-RGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRHG	-	AIC1952-RHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRIG	-	AIC1952-RIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRJG	-	AIC1952-RJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRKG	-	AIC1952-RKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRLG	-	AIC1952-RLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRMG	-	AIC1952-RMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRNG	-	AIC1952-RNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPROG	-	AIC1952-ROGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRPG	-	AIC1952-RPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRQG	-	AIC1952-RQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRRG	-	AIC1952-RRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRSG	-	AIC1952-RSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRTG	-	AIC1952-RTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRUG	-	AIC1952-RUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRVG	-	AIC1952-RVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRWG	-	AIC1952-RWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRXG	-	AIC1952-RXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRYG	-	AIC1952-RYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPRZG	-	AIC1952-RZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GPS3G	-	AIC1952-S3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPS4G	-	AIC1952-S4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPS5G	-	AIC1952-S5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPS6G	-	AIC1952-S6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPS7G	-	AIC1952-S7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPS8G	-	AIC1952-S8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSAG	-	AIC1952-SAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSBG	-	AIC1952-SBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSCG	-	AIC1952-SCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSDG	-	AIC1952-SDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSEG	-	AIC1952-SEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSFG	-	AIC1952-SFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSGG	-	AIC1952-SGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSHG	-	AIC1952-SHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSIG	-	AIC1952-SIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSJG	-	AIC1952-SJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSKG	-	AIC1952-SKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSLG	-	AIC1952-SLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSMG	-	AIC1952-SMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSNG	-	AIC1952-SNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSOG	-	AIC1952-SOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSPG	-	AIC1952-SPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSQG	-	AIC1952-SQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSRG	-	AIC1952-SRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSSG	-	AIC1952-SSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSTG	-	AIC1952-STGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSUG	-	AIC1952-SUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSVG	-	AIC1952-SVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSWG	-	AIC1952-SWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSXG	-	AIC1952-SXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSYG	-	AIC1952-SYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPSZG	-	AIC1952-SZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPT3G	-	AIC1952-T3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPT4G	-	AIC1952-T4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPT5G	-	AIC1952-T5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPT6G	-	AIC1952-T6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPT7G	-	AIC1952-T7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPT8G	-	AIC1952-T8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTAG	-	AIC1952-TAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTBG	-	AIC1952-TBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTCG	-	AIC1952-TCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTDG	-	AIC1952-TDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTEG	-	AIC1952-TEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTFG	-	AIC1952-TFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTGG	-	AIC1952-TGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTHG	-	AIC1952-THGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTIG	-	AIC1952-TIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTJG	-	AIC1952-TJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTKG	-	AIC1952-TKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTLG	-	AIC1952-TLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTMG	-	AIC1952-TMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTNG	-	AIC1952-TNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTOG	-	AIC1952-TOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTPG	-	AIC1952-TPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTQG	-	AIC1952-TQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTRG	-	AIC1952-TRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTSG	-	AIC1952-TSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTTG	-	AIC1952-TTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTUG	-	AIC1952-TUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTVG	-	AIC1952-TVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTWG	-	AIC1952-TWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTXG	-	AIC1952-TXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTYG	-	AIC1952-TYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPTZG	-	AIC1952-TZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPU3G	-	AIC1952-U3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPU4G	-	AIC1952-U4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPU5G	-	AIC1952-U5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPU6G	-	AIC1952-U6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPU7G	-	AIC1952-U7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPU8G	-	AIC1952-U8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GPUAG	-	AIC1952-UAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUBG	-	AIC1952-UBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUCG	-	AIC1952-UCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUDG	-	AIC1952-UDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUEG	-	AIC1952-UEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUFG	-	AIC1952-UFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUGG	-	AIC1952-UGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUHG	-	AIC1952-UHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUIG	-	AIC1952-UIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUJG	-	AIC1952-UJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUKG	-	AIC1952-UKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPULG	-	AIC1952-ULGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUMG	-	AIC1952-UMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUNG	-	AIC1952-UNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUOG	-	AIC1952-UOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUPG	-	AIC1952-UPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUQG	-	AIC1952-UQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPURG	-	AIC1952-URGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUSG	-	AIC1952-USGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUTG	-	AIC1952-UTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUUG	-	AIC1952-UUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUVG	-	AIC1952-UVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUWG	-	AIC1952-UWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUXG	-	AIC1952-UXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUYG	-	AIC1952-UYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPUZG	-	AIC1952-UZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPV3G	-	AIC1952-V3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPV4G	-	AIC1952-V4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPV5G	-	AIC1952-V5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPV6G	-	AIC1952-V6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPV7G	-	AIC1952-V7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPV8G	-	AIC1952-V8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVAG	-	AIC1952-VAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVBG	-	AIC1952-VBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVCG	-	AIC1952-VCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVDG	-	AIC1952-VDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVEG	-	AIC1952-VEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVFG	-	AIC1952-VFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVGG	-	AIC1952-VGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVHG	-	AIC1952-VHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVIG	-	AIC1952-VIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVJG	-	AIC1952-VJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVKG	-	AIC1952-VKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVLG	-	AIC1952-VLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVMG	-	AIC1952-VMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVNG	-	AIC1952-VNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVOG	-	AIC1952-VOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVPG	-	AIC1952-VPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVQG	-	AIC1952-VQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVRG	-	AIC1952-VRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVSG	-	AIC1952-VSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVTG	-	AIC1952-VTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVUG	-	AIC1952-VUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVVG	-	AIC1952-VVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVWG	-	AIC1952-VWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVXG	-	AIC1952-VXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVYG	-	AIC1952-VYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPVZG	-	AIC1952-VZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPW3G	-	AIC1952-W3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPW4G	-	AIC1952-W4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPW5G	-	AIC1952-W5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPW6G	-	AIC1952-W6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPW7G	-	AIC1952-W7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPW8G	-	AIC1952-W8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWAG	-	AIC1952-WAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWBG	-	AIC1952-WBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWCG	-	AIC1952-WCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWDG	-	AIC1952-WDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWEG	-	AIC1952-WEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWFG	-	AIC1952-WFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GPWGG	-	AIC1952-WGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWHG	-	AIC1952-WHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWIG	-	AIC1952-WIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWJG	-	AIC1952-WJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWKG	-	AIC1952-WKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWLG	-	AIC1952-WLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWMG	-	AIC1952-WMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWNG	-	AIC1952-WNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWOG	-	AIC1952-WOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWPG	-	AIC1952-WPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWQG	-	AIC1952-WQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWRG	-	AIC1952-WRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWSG	-	AIC1952-WSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWTG	-	AIC1952-WTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWUG	-	AIC1952-WUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWVG	-	AIC1952-WVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWWG	-	AIC1952-WWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWXG	-	AIC1952-WXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWYG	-	AIC1952-WYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPWZG	-	AIC1952-WZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPX3G	-	AIC1952-X3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPX4G	-	AIC1952-X4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPX5G	-	AIC1952-X5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPX6G	-	AIC1952-X6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPX7G	-	AIC1952-X7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPX8G	-	AIC1952-X8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXAG	-	AIC1952-XAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXBG	-	AIC1952-XBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXCG	-	AIC1952-XCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXDG	-	AIC1952-XDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXEG	-	AIC1952-XEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXFG	-	AIC1952-XFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXGG	-	AIC1952-XGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXHG	-	AIC1952-XHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXIG	-	AIC1952-XIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXJG	-	AIC1952-XJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXKG	-	AIC1952-XKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXLG	-	AIC1952-XLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXMG	-	AIC1952-XMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXNG	-	AIC1952-XNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXOG	-	AIC1952-XOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXPG	-	AIC1952-XPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXQG	-	AIC1952-XQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXRG	-	AIC1952-XRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXSG	-	AIC1952-XSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXTG	-	AIC1952-XTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXUG	-	AIC1952-XUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXVG	-	AIC1952-XVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXWG	-	AIC1952-XWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXXG	-	AIC1952-XXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXYG	-	AIC1952-XYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPXZG	-	AIC1952-XZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPY3G	-	AIC1952-Y3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPY4G	-	AIC1952-Y4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPY5G	-	AIC1952-Y5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPY6G	-	AIC1952-Y6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPY7G	-	AIC1952-Y7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPY8G	-	AIC1952-Y8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYAG	-	AIC1952-YAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYBG	-	AIC1952-YBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYCG	-	AIC1952-YCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYDG	-	AIC1952-YDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYEG	-	AIC1952-YEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYFG	-	AIC1952-YFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYGG	-	AIC1952-YGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYHG	-	AIC1952-YHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYIG	-	AIC1952-YIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYJG	-	AIC1952-YJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYKG	-	AIC1952-YKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYLG	-	AIC1952-YLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GPYMG	-	AIC1952-YMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYNG	-	AIC1952-YNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYOG	-	AIC1952-YOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYPG	-	AIC1952-YPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYQG	-	AIC1952-YQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYRG	-	AIC1952-YRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYSG	-	AIC1952-YSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYTG	-	AIC1952-YTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYUG	-	AIC1952-YUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYVG	-	AIC1952-YVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYWG	-	AIC1952-YWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYXG	-	AIC1952-YXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYYG	-	AIC1952-YYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPYZG	-	AIC1952-YZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZ3G	-	AIC1952-Z3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZ4G	-	AIC1952-Z4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZ5G	-	AIC1952-Z5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZ6G	-	AIC1952-Z6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZ7G	-	AIC1952-Z7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZ8G	-	AIC1952-Z8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZAG	-	AIC1952-ZAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/0.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZBG	-	AIC1952-ZBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/0.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZCG	-	AIC1952-ZCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZDG	-	AIC1952-ZDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZEG	-	AIC1952-ZEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZFG	-	AIC1952-ZFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZGG	-	AIC1952-ZGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZHG	-	AIC1952-ZHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZIG	-	AIC1952-ZIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZJG	-	AIC1952-ZJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZKG	-	AIC1952-ZKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZLG	-	AIC1952-ZLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZMG	-	AIC1952-ZMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZNG	-	AIC1952-ZNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZOG	-	AIC1952-ZOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZPG	-	AIC1952-ZPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZQG	-	AIC1952-ZQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZRG	-	AIC1952-ZRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZSG	-	AIC1952-ZSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZTG	-	AIC1952-ZTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZUG	-	AIC1952-ZUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZVG	-	AIC1952-ZVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZWG	-	AIC1952-ZWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZXG	-	AIC1952-ZXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZYG	-	AIC1952-ZYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GPZZG	-	AIC1952-ZZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 300mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GQ	-	RP152N015C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GQ33G	-	AIC1952-33GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ34G	-	AIC1952-34GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ35G	-	AIC1952-35GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ36G	-	AIC1952-36GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ37G	-	AIC1952-37GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ38G	-	AIC1952-38GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3AG	-	AIC1952-3AGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3BG	-	AIC1952-3BGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3CG	-	AIC1952-3CGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3DG	-	AIC1952-3DGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3EG	-	AIC1952-3EGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3FG	-	AIC1952-3FGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3GG	-	AIC1952-3GGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3HG	-	AIC1952-3HGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3IG	-	AIC1952-3IGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3JG	-	AIC1952-3JGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3KG	-	AIC1952-3KGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3LG	-	AIC1952-3LGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3MG	-	AIC1952-3MGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3NG	-	AIC1952-3NGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3OG	-	AIC1952-3OGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3PG	-	AIC1952-3PGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3QG	-	AIC1952-3QGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GQ3RG	-	AIC1952-3RGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3SG	-	AIC1952-3SGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3TG	-	AIC1952-3TGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3UG	-	AIC1952-3UGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3VG	-	AIC1952-3VGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3WG	-	AIC1952-3WGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3XG	-	AIC1952-3XGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3YG	-	AIC1952-3YGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ3ZG	-	AIC1952-3ZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ43G	-	AIC1952-43GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ44G	-	AIC1952-44GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ45G	-	AIC1952-45GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ46G	-	AIC1952-46GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ47G	-	AIC1952-47GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ48G	-	AIC1952-48GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4AG	-	AIC1952-4AGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4BG	-	AIC1952-4BGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4CG	-	AIC1952-4CGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4DG	-	AIC1952-4DGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4EG	-	AIC1952-4EGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4FG	-	AIC1952-4FGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4GG	-	AIC1952-4GGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4HG	-	AIC1952-4HGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4IG	-	AIC1952-4IGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4JG	-	AIC1952-4JGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4KG	-	AIC1952-4KGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4LG	-	AIC1952-4LGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4MG	-	AIC1952-4MGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4NG	-	AIC1952-4NGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4OG	-	AIC1952-4OGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4PG	-	AIC1952-4PGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4QG	-	AIC1952-4QGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4RG	-	AIC1952-4RGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4SG	-	AIC1952-4SGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4TG	-	AIC1952-4TGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4UG	-	AIC1952-4UGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4VG	-	AIC1952-4VGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4WG	-	AIC1952-4WGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4XG	-	AIC1952-4XGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4YG	-	AIC1952-4YGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ4ZG	-	AIC1952-4ZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ53G	-	AIC1952-53GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ54G	-	AIC1952-54GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ55G	-	AIC1952-55GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ56G	-	AIC1952-56GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ57G	-	AIC1952-57GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ58G	-	AIC1952-58GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5AG	-	AIC1952-5AGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5BG	-	AIC1952-5BGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5CG	-	AIC1952-5CGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5DG	-	AIC1952-5DGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5EG	-	AIC1952-5EGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5FG	-	AIC1952-5FGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5GG	-	AIC1952-5GGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5HG	-	AIC1952-5HGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5IG	-	AIC1952-5IGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5JG	-	AIC1952-5JGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5KG	-	AIC1952-5KGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5LG	-	AIC1952-5LGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5MG	-	AIC1952-5MGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5NG	-	AIC1952-5NGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5OG	-	AIC1952-5OGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5PG	-	AIC1952-5PGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5QG	-	AIC1952-5QGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5RG	-	AIC1952-5RGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5SG	-	AIC1952-5SGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5TG	-	AIC1952-5TGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5UG	-	AIC1952-5UGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5VG	-	AIC1952-5VGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5WG	-	AIC1952-5WGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GQ5XG	-	AIC1952-5XGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5YG	-	AIC1952-5YGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ5ZG	-	AIC1952-5ZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ63G	-	AIC1952-63GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ64G	-	AIC1952-64GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ65G	-	AIC1952-65GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ66G	-	AIC1952-66GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ67G	-	AIC1952-67GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ68G	-	AIC1952-68GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6AG	-	AIC1952-6AGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6BG	-	AIC1952-6BGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6CG	-	AIC1952-6CGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6DG	-	AIC1952-6DGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6EG	-	AIC1952-6EGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6FG	-	AIC1952-6FGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6GG	-	AIC1952-6GGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6HG	-	AIC1952-6HGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6IG	-	AIC1952-6IGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6JG	-	AIC1952-6JGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6KG	-	AIC1952-6KGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6LG	-	AIC1952-6LGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6MG	-	AIC1952-6MGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6NG	-	AIC1952-6NGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6OG	-	AIC1952-6OGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6PG	-	AIC1952-6PGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6QG	-	AIC1952-6QGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6RG	-	AIC1952-6RGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6SG	-	AIC1952-6SGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6TG	-	AIC1952-6TGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6UG	-	AIC1952-6UGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6VG	-	AIC1952-6VGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6WG	-	AIC1952-6WGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6XG	-	AIC1952-6XGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6YG	-	AIC1952-6YGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ6ZG	-	AIC1952-6ZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ73G	-	AIC1952-73GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ74G	-	AIC1952-74GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ75G	-	AIC1952-75GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ76G	-	AIC1952-76GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ77G	-	AIC1952-77GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ78G	-	AIC1952-78GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7AG	-	AIC1952-7AGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7BG	-	AIC1952-7BGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7CG	-	AIC1952-7CGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7DG	-	AIC1952-7DGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7EG	-	AIC1952-7EGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7FG	-	AIC1952-7FGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7GG	-	AIC1952-7GGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7HG	-	AIC1952-7HGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7IG	-	AIC1952-7IGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7JG	-	AIC1952-7JGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7KG	-	AIC1952-7KGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7LG	-	AIC1952-7LGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7MG	-	AIC1952-7MGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7NG	-	AIC1952-7NGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7OG	-	AIC1952-7OGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7PG	-	AIC1952-7PGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7QG	-	AIC1952-7QGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7RG	-	AIC1952-7RGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7SG	-	AIC1952-7SGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7TG	-	AIC1952-7TGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7UG	-	AIC1952-7UGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7VG	-	AIC1952-7VGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7WG	-	AIC1952-7WGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7XG	-	AIC1952-7XGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7YG	-	AIC1952-7YGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ7ZG	-	AIC1952-7ZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ83G	-	AIC1952-83GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ84G	-	AIC1952-84GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ85G	-	AIC1952-85GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GQ86G	-	AIC1952-86GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ87G	-	AIC1952-87GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ88G	-	AIC1952-88GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8AG	-	AIC1952-8AGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8BG	-	AIC1952-8BGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8CG	-	AIC1952-8CGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8DG	-	AIC1952-8DGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8EG	-	AIC1952-8EGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8FG	-	AIC1952-8FGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8GG	-	AIC1952-8GGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8HG	-	AIC1952-8HGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8IG	-	AIC1952-8IGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8JG	-	AIC1952-8JGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8KG	-	AIC1952-8KGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8LG	-	AIC1952-8LGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8MG	-	AIC1952-8MGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8NG	-	AIC1952-8NGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8OG	-	AIC1952-8OGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8PG	-	AIC1952-8PGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8QG	-	AIC1952-8QGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8RG	-	AIC1952-8RGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8SG	-	AIC1952-8SGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8TG	-	AIC1952-8TGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8UG	-	AIC1952-8UGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8VG	-	AIC1952-8VGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8WG	-	AIC1952-8WGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8XG	-	AIC1952-8XGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8YG	-	AIC1952-8YGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQ8ZG	-	AIC1952-8ZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQA3G	-	AIC1952-A3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQA4G	-	AIC1952-A4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQA5G	-	AIC1952-A5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQA6G	-	AIC1952-A6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQA7G	-	AIC1952-A7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQA8G	-	AIC1952-A8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAAG	-	AIC1952-AAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQABG	-	AIC1952-ABGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQACG	-	AIC1952-ACGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQADG	-	AIC1952-ADGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAEG	-	AIC1952-AEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAFG	-	AIC1952-AFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAGG	-	AIC1952-AGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAHG	-	AIC1952-AHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAIG	-	AIC1952-AIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAJG	-	AIC1952-AJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAKG	-	AIC1952-AKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQALG	-	AIC1952-ALGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAMG	-	AIC1952-AMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQANG	-	AIC1952-ANGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAOG	-	AIC1952-AOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAPG	-	AIC1952-APGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAQG	-	AIC1952-AQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQARG	-	AIC1952-ARGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQASG	-	AIC1952-ASGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQATG	-	AIC1952-ATGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAUG	-	AIC1952-AUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAVG	-	AIC1952-AVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAWG	-	AIC1952-AWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAXG	-	AIC1952-AXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAYG	-	AIC1952-AYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQAZG	-	AIC1952-AZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQB3G	-	AIC1952-B3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQB4G	-	AIC1952-B4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQB5G	-	AIC1952-B5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQB6G	-	AIC1952-B6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQB7G	-	AIC1952-B7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQB8G	-	AIC1952-B8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBAG	-	AIC1952-BAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBBG	-	AIC1952-BBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBCG	-	AIC1952-BCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GQBDG	-	AIC1952-BDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBEG	-	AIC1952-BEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBFG	-	AIC1952-BFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBGG	-	AIC1952-BGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBHG	-	AIC1952-BHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBIG	-	AIC1952-BIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBJG	-	AIC1952-BJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBKG	-	AIC1952-BKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBLG	-	AIC1952-BLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBMG	-	AIC1952-BMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBNG	-	AIC1952-BNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBOG	-	AIC1952-BOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBPG	-	AIC1952-BPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBQG	-	AIC1952-BQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBRG	-	AIC1952-BRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBSG	-	AIC1952-BSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBTG	-	AIC1952-BTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBUG	-	AIC1952-BUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBVG	-	AIC1952-BVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBWG	-	AIC1952-BWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBXG	-	AIC1952-BXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBYG	-	AIC1952-BYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQBZG	-	AIC1952-BZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQC3G	-	AIC1952-C3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQC4G	-	AIC1952-C4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQC5G	-	AIC1952-C5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQC6G	-	AIC1952-C6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQC7G	-	AIC1952-C7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQC8G	-	AIC1952-C8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCAG	-	AIC1952-CAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCBG	-	AIC1952-CBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCCG	-	AIC1952-CCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCDG	-	AIC1952-CDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCEG	-	AIC1952-CEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCFG	-	AIC1952-CFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCGG	-	AIC1952-CGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCHG	-	AIC1952-CHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCIG	-	AIC1952-CIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCJG	-	AIC1952-CJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCKG	-	AIC1952-CKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCLG	-	AIC1952-CLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCMG	-	AIC1952-CMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCNG	-	AIC1952-CNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCOG	-	AIC1952-COGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCPG	-	AIC1952-CPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCQG	-	AIC1952-CQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCRG	-	AIC1952-CRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCSG	-	AIC1952-CSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCTG	-	AIC1952-CTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCUG	-	AIC1952-CUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCVG	-	AIC1952-CVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCWG	-	AIC1952-CWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCXG	-	AIC1952-CXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCYG	-	AIC1952-CYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQCZG	-	AIC1952-CZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQD3G	-	AIC1952-D3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQD4G	-	AIC1952-D4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQD5G	-	AIC1952-D5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQD6G	-	AIC1952-D6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQD7G	-	AIC1952-D7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQD8G	-	AIC1952-D8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDAG	-	AIC1952-DAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDBG	-	AIC1952-DBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDCG	-	AIC1952-DCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDDG	-	AIC1952-DDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDEG	-	AIC1952-DEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDFG	-	AIC1952-DFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDGG	-	AIC1952-DGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDHG	-	AIC1952-DHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDIG	-	AIC1952-DIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GQDJG	-	AIC1952-DJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDKG	-	AIC1952-DKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDLG	-	AIC1952-DLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDMG	-	AIC1952-DMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDNG	-	AIC1952-DNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDOG	-	AIC1952-DOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDPG	-	AIC1952-DPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDQG	-	AIC1952-DQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDRG	-	AIC1952-DRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDSG	-	AIC1952-DSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDTG	-	AIC1952-DTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDUG	-	AIC1952-DUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDVG	-	AIC1952-DVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDWG	-	AIC1952-DWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDXG	-	AIC1952-DXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDYG	-	AIC1952-DYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQDZG	-	AIC1952-DZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQE3G	-	AIC1952-E3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQE4G	-	AIC1952-E4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQE5G	-	AIC1952-E5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQE6G	-	AIC1952-E6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQE7G	-	AIC1952-E7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQE8G	-	AIC1952-E8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEAG	-	AIC1952-EAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEBG	-	AIC1952-EBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQECG	-	AIC1952-ECGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEDG	-	AIC1952-EDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEEG	-	AIC1952-EEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEFG	-	AIC1952-EFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEGG	-	AIC1952-EGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEHG	-	AIC1952-EHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEIG	-	AIC1952-EIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEJG	-	AIC1952-EJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEKG	-	AIC1952-EKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQELG	-	AIC1952-ELGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEMG	-	AIC1952-EMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQENG	-	AIC1952-ENGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEOG	-	AIC1952-EOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEPG	-	AIC1952-EPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEQG	-	AIC1952-EQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQERG	-	AIC1952-ERGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQESG	-	AIC1952-ESGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQETG	-	AIC1952-ETGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEUG	-	AIC1952-EUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEVG	-	AIC1952-EVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEWG	-	AIC1952-EWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEXG	-	AIC1952-EXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEYG	-	AIC1952-EYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQEZG	-	AIC1952-EZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQF3G	-	AIC1952-F3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQF4G	-	AIC1952-F4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQF5G	-	AIC1952-F5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQF6G	-	AIC1952-F6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQF7G	-	AIC1952-F7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQF8G	-	AIC1952-F8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFAG	-	AIC1952-FAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFBG	-	AIC1952-FBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFCG	-	AIC1952-FCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFDG	-	AIC1952-FDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFEG	-	AIC1952-FEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFFG	-	AIC1952-FFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFGG	-	AIC1952-FGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFHG	-	AIC1952-FHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFIG	-	AIC1952-FIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFJG	-	AIC1952-FJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFKG	-	AIC1952-FKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFLG	-	AIC1952-FLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFMG	-	AIC1952-FMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFNG	-	AIC1952-FNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFOG	-	AIC1952-FOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GQFPG	-	AIC1952-FPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFQG	-	AIC1952-FQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFRG	-	AIC1952-FRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFSG	-	AIC1952-FSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFTG	-	AIC1952-FTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFUG	-	AIC1952-FUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFVG	-	AIC1952-FVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFWG	-	AIC1952-FWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFXG	-	AIC1952-FXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFYG	-	AIC1952-FYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQFZG	-	AIC1952-FZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQG3G	-	AIC1952-G3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQG4G	-	AIC1952-G4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQG5G	-	AIC1952-G5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQG6G	-	AIC1952-G6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQG7G	-	AIC1952-G7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQG8G	-	AIC1952-G8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGAG	-	AIC1952-GAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGBG	-	AIC1952-GBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGCG	-	AIC1952-GCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGDG	-	AIC1952-GDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGEG	-	AIC1952-GEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGFG	-	AIC1952-GFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGGG	-	AIC1952-GGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGHG	-	AIC1952-GHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGIG	-	AIC1952-GIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGJG	-	AIC1952-GJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGKG	-	AIC1952-GKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGLG	-	AIC1952-GLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGMG	-	AIC1952-GMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGNG	-	AIC1952-GNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGOG	-	AIC1952-GOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGPG	-	AIC1952-GPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGQG	-	AIC1952-GQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGRG	-	AIC1952-GRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGSG	-	AIC1952-GSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGTG	-	AIC1952-GTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGUG	-	AIC1952-GUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGVG	-	AIC1952-GVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGWG	-	AIC1952-GWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGXG	-	AIC1952-GXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGYG	-	AIC1952-GYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQGZG	-	AIC1952-GZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQH3G	-	AIC1952-H3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQH4G	-	AIC1952-H4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQH5G	-	AIC1952-H5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQH6G	-	AIC1952-H6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQH7G	-	AIC1952-H7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQH8G	-	AIC1952-H8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHAG	-	AIC1952-HAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHBG	-	AIC1952-HBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHCG	-	AIC1952-HCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHDG	-	AIC1952-HDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHEG	-	AIC1952-HEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHFG	-	AIC1952-HFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHGG	-	AIC1952-HGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHHG	-	AIC1952-HHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHIG	-	AIC1952-HIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHJG	-	AIC1952-HJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHKG	-	AIC1952-HKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHLG	-	AIC1952-HLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHMG	-	AIC1952-HMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHNG	-	AIC1952-HNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHOG	-	AIC1952-HOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHPG	-	AIC1952-HPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHQG	-	AIC1952-HQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHRG	-	AIC1952-HRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHSG	-	AIC1952-HSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHTG	-	AIC1952-HTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHUG	-	AIC1952-HUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GQHVG	-	AIC1952-HVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHWG	-	AIC1952-HWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHXG	-	AIC1952-HXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHYG	-	AIC1952-HYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQHZG	-	AIC1952-HZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQI3G	-	AIC1952-I3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQI4G	-	AIC1952-I4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQI5G	-	AIC1952-I5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQI6G	-	AIC1952-I6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQI7G	-	AIC1952-I7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQI8G	-	AIC1952-I8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIAG	-	AIC1952-IAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIBG	-	AIC1952-IBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQICG	-	AIC1952-ICGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIDG	-	AIC1952-IDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIEG	-	AIC1952-IEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIFG	-	AIC1952-IFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIGG	-	AIC1952-IGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIHG	-	AIC1952-IHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIIG	-	AIC1952-IIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIJG	-	AIC1952-IJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIKG	-	AIC1952-IKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQILG	-	AIC1952-ILGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIMG	-	AIC1952-IMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQING	-	AIC1952-INGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIOG	-	AIC1952-IOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIPG	-	AIC1952-IPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIQG	-	AIC1952-IQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIRG	-	AIC1952-IRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQISG	-	AIC1952-ISGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQITG	-	AIC1952-ITGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIUG	-	AIC1952-IUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIVG	-	AIC1952-IVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIWG	-	AIC1952-IWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIXG	-	AIC1952-IXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIYG	-	AIC1952-IYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQIZG	-	AIC1952-IZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJ3G	-	AIC1952-J3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJ4G	-	AIC1952-J4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJ5G	-	AIC1952-J5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJ6G	-	AIC1952-J6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJ7G	-	AIC1952-J7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJ8G	-	AIC1952-J8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJAG	-	AIC1952-JAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJBG	-	AIC1952-JBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJCG	-	AIC1952-JCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJDG	-	AIC1952-JDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJEG	-	AIC1952-JEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJFG	-	AIC1952-JFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJGG	-	AIC1952-JGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJHG	-	AIC1952-JHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJIG	-	AIC1952-JIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJJG	-	AIC1952-JJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJKG	-	AIC1952-JKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJLG	-	AIC1952-JLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJMG	-	AIC1952-JMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJNG	-	AIC1952-JNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJOG	-	AIC1952-JOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJPG	-	AIC1952-JPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJQG	-	AIC1952-JQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJRG	-	AIC1952-JRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJSG	-	AIC1952-JSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJTG	-	AIC1952-JTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJUG	-	AIC1952-JUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJVG	-	AIC1952-JVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJWG	-	AIC1952-JWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJXG	-	AIC1952-JXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJYG	-	AIC1952-JYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQJZG	-	AIC1952-JZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQK3G	-	AIC1952-K3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GQK4G	-	AIC1952-K4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQK5G	-	AIC1952-K5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQK6G	-	AIC1952-K6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQK7G	-	AIC1952-K7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQK8G	-	AIC1952-K8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKAG	-	AIC1952-KAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKBG	-	AIC1952-KBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKCG	-	AIC1952-KCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKDG	-	AIC1952-KDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKEG	-	AIC1952-KEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKFG	-	AIC1952-KFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKGG	-	AIC1952-KGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKHG	-	AIC1952-KHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKIG	-	AIC1952-KIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKJG	-	AIC1952-KJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKKG	-	AIC1952-KKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKLG	-	AIC1952-KLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKMG	-	AIC1952-KMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKNG	-	AIC1952-KNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKOG	-	AIC1952-KOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKPG	-	AIC1952-KPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKQG	-	AIC1952-KQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKRG	-	AIC1952-KRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKSG	-	AIC1952-KSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKTG	-	AIC1952-KTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKUG	-	AIC1952-KUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKVG	-	AIC1952-KVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKWG	-	AIC1952-KWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKXG	-	AIC1952-KXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKYG	-	AIC1952-KYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQKZG	-	AIC1952-KZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQL3G	-	AIC1952-L3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQL4G	-	AIC1952-L4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQL5G	-	AIC1952-L5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQL6G	-	AIC1952-L6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQL7G	-	AIC1952-L7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQL8G	-	AIC1952-L8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLAG	-	AIC1952-LAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLBG	-	AIC1952-LBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLCG	-	AIC1952-LCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLDG	-	AIC1952-LDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLEG	-	AIC1952-LEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLFG	-	AIC1952-LFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLGG	-	AIC1952-LGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLHG	-	AIC1952-LHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLIG	-	AIC1952-LIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLJG	-	AIC1952-LJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLKG	-	AIC1952-LKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLLG	-	AIC1952-LLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLMG	-	AIC1952-LMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLNG	-	AIC1952-LNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLOG	-	AIC1952-LOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLPG	-	AIC1952-LPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLQG	-	AIC1952-LQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLRG	-	AIC1952-LRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLSG	-	AIC1952-LSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLTG	-	AIC1952-LTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLUG	-	AIC1952-LUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLVG	-	AIC1952-LVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLWG	-	AIC1952-LWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLXG	-	AIC1952-LXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLYG	-	AIC1952-LYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQLZG	-	AIC1952-LZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQM3G	-	AIC1952-M3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQM4G	-	AIC1952-M4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQM5G	-	AIC1952-M5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQM6G	-	AIC1952-M6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQM7G	-	AIC1952-M7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQM8G	-	AIC1952-M8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMAG	-	AIC1952-MAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GQMBG	-	AIC1952-MBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMCG	-	AIC1952-MCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMDG	-	AIC1952-MDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMEG	-	AIC1952-MEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMFG	-	AIC1952-MFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMGG	-	AIC1952-MGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMHG	-	AIC1952-MHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMIG	-	AIC1952-MIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMJG	-	AIC1952-MJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMKG	-	AIC1952-MKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMLG	-	AIC1952-MLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMMG	-	AIC1952-MMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMNG	-	AIC1952-MNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMOG	-	AIC1952-MOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMPG	-	AIC1952-MPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMQG	-	AIC1952-MQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMRG	-	AIC1952-MRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMSG	-	AIC1952-MSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMTG	-	AIC1952-MTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMUG	-	AIC1952-MUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMVG	-	AIC1952-MVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMWG	-	AIC1952-MWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMXG	-	AIC1952-MXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMYG	-	AIC1952-MYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQMZG	-	AIC1952-MZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQN3G	-	AIC1952-N3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQN4G	-	AIC1952-N4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQN5G	-	AIC1952-N5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQN6G	-	AIC1952-N6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQN7G	-	AIC1952-N7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQN8G	-	AIC1952-N8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNAG	-	AIC1952-NAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNBG	-	AIC1952-NBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNCG	-	AIC1952-NCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNDG	-	AIC1952-NDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNEG	-	AIC1952-NEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNFG	-	AIC1952-NFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNGG	-	AIC1952-NGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNHG	-	AIC1952-NHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNIG	-	AIC1952-NIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNJG	-	AIC1952-NJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNKG	-	AIC1952-NKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNLG	-	AIC1952-NLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNMG	-	AIC1952-NMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNNG	-	AIC1952-NNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNOG	-	AIC1952-NOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNPG	-	AIC1952-NPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNQG	-	AIC1952-NQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNRG	-	AIC1952-NRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNSG	-	AIC1952-NSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNTG	-	AIC1952-NTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNUG	-	AIC1952-NUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNVG	-	AIC1952-NVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNWG	-	AIC1952-NWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNXG	-	AIC1952-NXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNYG	-	AIC1952-NYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQNZG	-	AIC1952-NZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQO3G	-	AIC1952-O3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQO4G	-	AIC1952-O4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQO5G	-	AIC1952-O5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQO6G	-	AIC1952-O6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQO7G	-	AIC1952-O7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQO8G	-	AIC1952-O8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOAG	-	AIC1952-OAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOBG	-	AIC1952-OBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOCG	-	AIC1952-OCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQODG	-	AIC1952-ODGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOEG	-	AIC1952-OEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOFG	-	AIC1952-OFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOGG	-	AIC1952-OGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GQOHG	-	AIC1952-OHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOIG	-	AIC1952-OIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOJG	-	AIC1952-OJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOKG	-	AIC1952-OKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOLG	-	AIC1952-OLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOMG	-	AIC1952-OMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQONG	-	AIC1952-ONGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOOG	-	AIC1952-OOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOPG	-	AIC1952-OPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOQG	-	AIC1952-OQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQORG	-	AIC1952-ORGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOSG	-	AIC1952-OSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOTG	-	AIC1952-OTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOUG	-	AIC1952-OUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOVG	-	AIC1952-OVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOWG	-	AIC1952-OWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOXG	-	AIC1952-OXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOYG	-	AIC1952-OYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQOZG	-	AIC1952-OZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQP3G	-	AIC1952-P3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQP4G	-	AIC1952-P4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQP5G	-	AIC1952-P5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQP6G	-	AIC1952-P6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQP7G	-	AIC1952-P7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQP8G	-	AIC1952-P8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPAG	-	AIC1952-PAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPBG	-	AIC1952-PBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPCG	-	AIC1952-PCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPDG	-	AIC1952-PDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPEG	-	AIC1952-PEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPFG	-	AIC1952-PFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPGG	-	AIC1952-PGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPHG	-	AIC1952-PHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPIG	-	AIC1952-PIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPJG	-	AIC1952-PJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPKG	-	AIC1952-PKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPLG	-	AIC1952-PLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPMG	-	AIC1952-PMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPNG	-	AIC1952-PNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPOG	-	AIC1952-POGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPPG	-	AIC1952-PPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPQG	-	AIC1952-PQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPRG	-	AIC1952-PRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPSG	-	AIC1952-PSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPTG	-	AIC1952-PTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPUG	-	AIC1952-PUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPVG	-	AIC1952-PVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPWG	-	AIC1952-PWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPXG	-	AIC1952-PXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPYG	-	AIC1952-PYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQPZG	-	AIC1952-PZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQ3G	-	AIC1952-Q3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQ4G	-	AIC1952-Q4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQ5G	-	AIC1952-Q5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQ6G	-	AIC1952-Q6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQ7G	-	AIC1952-Q7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQ8G	-	AIC1952-Q8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQAG	-	AIC1952-QAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQBG	-	AIC1952-QBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQCG	-	AIC1952-QCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQDG	-	AIC1952-QDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQEG	-	AIC1952-QEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQFG	-	AIC1952-QFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQGG	-	AIC1952-QGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQHG	-	AIC1952-QHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQIG	-	AIC1952-QIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQJG	-	AIC1952-QJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQKG	-	AIC1952-QKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQLG	-	AIC1952-QLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQMG	-	AIC1952-QMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GQQNG	-	AIC1952-QNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQOG	-	AIC1952-QOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQPG	-	AIC1952-QPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQQG	-	AIC1952-QQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQRG	-	AIC1952-QRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQSG	-	AIC1952-QSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQTG	-	AIC1952-QTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQUG	-	AIC1952-QUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQVG	-	AIC1952-QVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQWG	-	AIC1952-QWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQXG	-	AIC1952-QXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQYG	-	AIC1952-QYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQQZG	-	AIC1952-QZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQR3G	-	AIC1952-R3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQR4G	-	AIC1952-R4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQR5G	-	AIC1952-R5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQR6G	-	AIC1952-R6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQR7G	-	AIC1952-R7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQR8G	-	AIC1952-R8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRAG	-	AIC1952-RAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRBG	-	AIC1952-RBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRCG	-	AIC1952-RCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRDG	-	AIC1952-RDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQREG	-	AIC1952-REGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRFG	-	AIC1952-RFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRGG	-	AIC1952-RGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRHG	-	AIC1952-RHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRIG	-	AIC1952-RIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRJG	-	AIC1952-RJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRKG	-	AIC1952-RKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRLG	-	AIC1952-RLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRMG	-	AIC1952-RMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRNG	-	AIC1952-RNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQROG	-	AIC1952-ROGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRPG	-	AIC1952-RPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRQG	-	AIC1952-RQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRRG	-	AIC1952-RRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRSG	-	AIC1952-RSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRTG	-	AIC1952-RTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRUG	-	AIC1952-RUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRVG	-	AIC1952-RVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRWG	-	AIC1952-RWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRXG	-	AIC1952-RXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRYG	-	AIC1952-RYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQRZG	-	AIC1952-RZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQS3G	-	AIC1952-S3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQS4G	-	AIC1952-S4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQS5G	-	AIC1952-S5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQS6G	-	AIC1952-S6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQS7G	-	AIC1952-S7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQS8G	-	AIC1952-S8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSAG	-	AIC1952-SAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSBG	-	AIC1952-SBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSCG	-	AIC1952-SCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSDG	-	AIC1952-SDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSEG	-	AIC1952-SEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSFG	-	AIC1952-SFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSGG	-	AIC1952-SGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSHG	-	AIC1952-SHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSIG	-	AIC1952-SIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSJG	-	AIC1952-SJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSKG	-	AIC1952-SKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSLG	-	AIC1952-SLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSMG	-	AIC1952-SMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSNG	-	AIC1952-SNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSOG	-	AIC1952-SOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSPG	-	AIC1952-SPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSQG	-	AIC1952-SQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSRG	-	AIC1952-SRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSSG	-	AIC1952-SSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GQSTG	-	AIC1952-STGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSUG	-	AIC1952-SUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSVG	-	AIC1952-SVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSWG	-	AIC1952-SWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSXG	-	AIC1952-SXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSYG	-	AIC1952-SYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQSZG	-	AIC1952-SZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQT3G	-	AIC1952-T3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQT4G	-	AIC1952-T4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQT5G	-	AIC1952-T5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQT6G	-	AIC1952-T6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQT7G	-	AIC1952-T7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQT8G	-	AIC1952-T8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTAG	-	AIC1952-TAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTBG	-	AIC1952-TBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTCG	-	AIC1952-TCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTDG	-	AIC1952-TDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTEG	-	AIC1952-TEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTFG	-	AIC1952-TFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTGG	-	AIC1952-TGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTHG	-	AIC1952-THGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTIG	-	AIC1952-TIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTJG	-	AIC1952-TJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTKG	-	AIC1952-TKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTLG	-	AIC1952-TLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTMG	-	AIC1952-TMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTNG	-	AIC1952-TNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTOG	-	AIC1952-TOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTPG	-	AIC1952-TPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTQG	-	AIC1952-TQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTRG	-	AIC1952-TRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTSG	-	AIC1952-TSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTTG	-	AIC1952-TTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTUG	-	AIC1952-TUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTVG	-	AIC1952-TVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTWG	-	AIC1952-TWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTXG	-	AIC1952-TXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTYG	-	AIC1952-TYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQTZG	-	AIC1952-TZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQU3G	-	AIC1952-U3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQU4G	-	AIC1952-U4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQU5G	-	AIC1952-U5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQU6G	-	AIC1952-U6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQU7G	-	AIC1952-U7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQU8G	-	AIC1952-U8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUAG	-	AIC1952-UAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUBG	-	AIC1952-UBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUCG	-	AIC1952-UCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUDG	-	AIC1952-UDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUEG	-	AIC1952-UEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUFG	-	AIC1952-UFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUGG	-	AIC1952-UGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUHG	-	AIC1952-UHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUIG	-	AIC1952-UIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUJG	-	AIC1952-UJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUKG	-	AIC1952-UKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQULG	-	AIC1952-ULGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUMG	-	AIC1952-UMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUNG	-	AIC1952-UNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUOG	-	AIC1952-UOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUPG	-	AIC1952-UPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUQG	-	AIC1952-UQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQURG	-	AIC1952-URGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUSG	-	AIC1952-USGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUTG	-	AIC1952-UTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUUG	-	AIC1952-UUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUVG	-	AIC1952-UVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUWG	-	AIC1952-UWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUXG	-	AIC1952-UXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQUYG	-	AIC1952-UYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GQUZG	-	AIC1952-UZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQV3G	-	AIC1952-V3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQV4G	-	AIC1952-V4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQV5G	-	AIC1952-V5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQV6G	-	AIC1952-V6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQV7G	-	AIC1952-V7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQV8G	-	AIC1952-V8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVAG	-	AIC1952-VAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVBG	-	AIC1952-VBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVCG	-	AIC1952-VCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVDG	-	AIC1952-VDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVEG	-	AIC1952-VEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVFG	-	AIC1952-VFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVGG	-	AIC1952-VGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVHG	-	AIC1952-VHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVIG	-	AIC1952-VIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVJG	-	AIC1952-VJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVKG	-	AIC1952-VKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVLG	-	AIC1952-VLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVMG	-	AIC1952-VMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVNG	-	AIC1952-VNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVOG	-	AIC1952-VOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVPG	-	AIC1952-VPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVQG	-	AIC1952-VQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVRG	-	AIC1952-VRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVSG	-	AIC1952-VSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVTG	-	AIC1952-VTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVUG	-	AIC1952-VUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVVG	-	AIC1952-VVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVWG	-	AIC1952-VWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVXG	-	AIC1952-VXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVYG	-	AIC1952-VYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQVZG	-	AIC1952-VZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQW3G	-	AIC1952-W3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQW4G	-	AIC1952-W4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQW5G	-	AIC1952-W5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQW6G	-	AIC1952-W6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQW7G	-	AIC1952-W7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQW8G	-	AIC1952-W8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWAG	-	AIC1952-WAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWBG	-	AIC1952-WBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWCG	-	AIC1952-WCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWDG	-	AIC1952-WDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWEG	-	AIC1952-WEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWFG	-	AIC1952-WFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWGG	-	AIC1952-WGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWHG	-	AIC1952-WHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWIG	-	AIC1952-WIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWJG	-	AIC1952-WJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWKG	-	AIC1952-WKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWLG	-	AIC1952-WLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWMG	-	AIC1952-WMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWNG	-	AIC1952-WNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWOG	-	AIC1952-WOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWPG	-	AIC1952-WPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWQG	-	AIC1952-WQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWRG	-	AIC1952-WRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWSG	-	AIC1952-WSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWTG	-	AIC1952-WTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWUG	-	AIC1952-WUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWVG	-	AIC1952-WVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWWG	-	AIC1952-WWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWXG	-	AIC1952-WXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWYG	-	AIC1952-WYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQWZG	-	AIC1952-WZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQX3G	-	AIC1952-X3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQX4G	-	AIC1952-X4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQX5G	-	AIC1952-X5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQX6G	-	AIC1952-X6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQX7G	-	AIC1952-X7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GQX8G	-	AIC1952-X8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXAG	-	AIC1952-XAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXBG	-	AIC1952-XBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXCG	-	AIC1952-XCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXDG	-	AIC1952-XDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXEG	-	AIC1952-XEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXFG	-	AIC1952-XFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXGG	-	AIC1952-XGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXHG	-	AIC1952-XHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXIG	-	AIC1952-XIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXJG	-	AIC1952-XJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXKG	-	AIC1952-XKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXLG	-	AIC1952-XLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXMG	-	AIC1952-XMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXNG	-	AIC1952-XNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXOG	-	AIC1952-XOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXPG	-	AIC1952-XPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXQG	-	AIC1952-XQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXRG	-	AIC1952-XRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXSG	-	AIC1952-XSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXTG	-	AIC1952-XTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXUG	-	AIC1952-XUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXVG	-	AIC1952-XVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXWG	-	AIC1952-XWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXXG	-	AIC1952-XXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXYG	-	AIC1952-XYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQXZG	-	AIC1952-XZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQY3G	-	AIC1952-Y3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQY4G	-	AIC1952-Y4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQY5G	-	AIC1952-Y5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQY6G	-	AIC1952-Y6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQY7G	-	AIC1952-Y7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQY8G	-	AIC1952-Y8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYAG	-	AIC1952-YAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYBG	-	AIC1952-YBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYCG	-	AIC1952-YCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYDG	-	AIC1952-YDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYEG	-	AIC1952-YEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYFG	-	AIC1952-YFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYGG	-	AIC1952-YGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYHG	-	AIC1952-YHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYIG	-	AIC1952-YIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYJG	-	AIC1952-YJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYKG	-	AIC1952-YKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYLG	-	AIC1952-YLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYMG	-	AIC1952-YMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYNG	-	AIC1952-YNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYOG	-	AIC1952-YOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYPG	-	AIC1952-YPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYQG	-	AIC1952-YQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYRG	-	AIC1952-YRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYSG	-	AIC1952-YSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYTG	-	AIC1952-YTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYUG	-	AIC1952-YUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYVG	-	AIC1952-YVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYWG	-	AIC1952-YWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYXG	-	AIC1952-YXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYYG	-	AIC1952-YYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQYZG	-	AIC1952-YZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZ3G	-	AIC1952-Z3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZ4G	-	AIC1952-Z4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZ5G	-	AIC1952-Z5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZ6G	-	AIC1952-Z6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZ7G	-	AIC1952-Z7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZ8G	-	AIC1952-Z8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZAG	-	AIC1952-ZAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/0.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZBG	-	AIC1952-ZBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/0.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZCG	-	AIC1952-ZCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZDG	-	AIC1952-ZDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZEG	-	AIC1952-ZEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GQZFG	-	AIC1952-ZFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZGG	-	AIC1952-ZGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZHG	-	AIC1952-ZHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZIG	-	AIC1952-ZIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZJG	-	AIC1952-ZJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZKG	-	AIC1952-ZKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZLG	-	AIC1952-ZLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZMG	-	AIC1952-ZMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZNG	-	AIC1952-ZNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZOG	-	AIC1952-ZOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZPG	-	AIC1952-ZPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZQG	-	AIC1952-ZQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZRG	-	AIC1952-ZRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZSG	-	AIC1952-ZSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZTG	-	AIC1952-ZTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZUG	-	AIC1952-ZUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZVG	-	AIC1952-ZVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZWG	-	AIC1952-ZWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZXG	-	AIC1952-ZXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZYG	-	AIC1952-ZYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GQZZG	-	AIC1952-ZZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 300mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GR	-	RP152N016C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GS	-	RP152N017C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GT	-	RP152N018C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GU	-	RP152N019C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GU33G	-	AIC1953-33GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU34G	-	AIC1953-34GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU35G	-	AIC1953-35GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU36G	-	AIC1953-36GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU37G	-	AIC1953-37GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU38G	-	AIC1953-38GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3AG	-	AIC1953-3AGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3BG	-	AIC1953-3BGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3CG	-	AIC1953-3CGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3DG	-	AIC1953-3DGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3EG	-	AIC1953-3EGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3FG	-	AIC1953-3FGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3GG	-	AIC1953-3GGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3HG	-	AIC1953-3HGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3IG	-	AIC1953-3IGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3JG	-	AIC1953-3JGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3KG	-	AIC1953-3KGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3LG	-	AIC1953-3LGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3MG	-	AIC1953-3MGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3NG	-	AIC1953-3NGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3OG	-	AIC1953-3OGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3PG	-	AIC1953-3PGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3QG	-	AIC1953-3QGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3RG	-	AIC1953-3RGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3SG	-	AIC1953-3SGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3TG	-	AIC1953-3TGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3UG	-	AIC1953-3UGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3VG	-	AIC1953-3VGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3WG	-	AIC1953-3WGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3XG	-	AIC1953-3XGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3YG	-	AIC1953-3YGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU3ZG	-	AIC1953-3ZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU43G	-	AIC1953-43GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU44G	-	AIC1953-44GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU45G	-	AIC1953-45GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU46G	-	AIC1953-46GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU47G	-	AIC1953-47GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU48G	-	AIC1953-48GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4AG	-	AIC1953-4AGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4BG	-	AIC1953-4BGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4CG	-	AIC1953-4CGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4DG	-	AIC1953-4DGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4EG	-	AIC1953-4EGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4FG	-	AIC1953-4FGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4GG	-	AIC1953-4GGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GU4HG	-	AIC1953-4HGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4IG	-	AIC1953-4IGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4JG	-	AIC1953-4JGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4KG	-	AIC1953-4KGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4LG	-	AIC1953-4LGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4MG	-	AIC1953-4MGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4NG	-	AIC1953-4NGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4OG	-	AIC1953-4OGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4PG	-	AIC1953-4PGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4QG	-	AIC1953-4QGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4RG	-	AIC1953-4RGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4SG	-	AIC1953-4SGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4TG	-	AIC1953-4TGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4UG	-	AIC1953-4UGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4VG	-	AIC1953-4VGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4WG	-	AIC1953-4WGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4XG	-	AIC1953-4XGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4YG	-	AIC1953-4YGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU4ZG	-	AIC1953-4ZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU53G	-	AIC1953-53GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU54G	-	AIC1953-54GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU55G	-	AIC1953-55GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU56G	-	AIC1953-56GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU57G	-	AIC1953-57GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU58G	-	AIC1953-58GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5AG	-	AIC1953-5AGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5BG	-	AIC1953-5BGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5CG	-	AIC1953-5CGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5DG	-	AIC1953-5DGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5EG	-	AIC1953-5EGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5FG	-	AIC1953-5FGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5GG	-	AIC1953-5GGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5HG	-	AIC1953-5HGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5IG	-	AIC1953-5IGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5JG	-	AIC1953-5JGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5KG	-	AIC1953-5KGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5LG	-	AIC1953-5LGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5MG	-	AIC1953-5MGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5NG	-	AIC1953-5NGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5OG	-	AIC1953-5OGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5PG	-	AIC1953-5PGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5QG	-	AIC1953-5QGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5RG	-	AIC1953-5RGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5SG	-	AIC1953-5SGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5TG	-	AIC1953-5TGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5UG	-	AIC1953-5UGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5VG	-	AIC1953-5VGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5WG	-	AIC1953-5WGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5XG	-	AIC1953-5XGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5YG	-	AIC1953-5YGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU5ZG	-	AIC1953-5ZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU63G	-	AIC1953-63GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU64G	-	AIC1953-64GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU65G	-	AIC1953-65GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU66G	-	AIC1953-66GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU67G	-	AIC1953-67GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU68G	-	AIC1953-68GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6AG	-	AIC1953-6AGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6BG	-	AIC1953-6BGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6CG	-	AIC1953-6CGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6DG	-	AIC1953-6DGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6EG	-	AIC1953-6EGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6FG	-	AIC1953-6FGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6GG	-	AIC1953-6GGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6HG	-	AIC1953-6HGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6IG	-	AIC1953-6IGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6JG	-	AIC1953-6JGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6KG	-	AIC1953-6KGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6LG	-	AIC1953-6LGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6MG	-	AIC1953-6MGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GU6NG	-	AIC1953-6NGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6OG	-	AIC1953-6OGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6PG	-	AIC1953-6PGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6QG	-	AIC1953-6QGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6RG	-	AIC1953-6RGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6SG	-	AIC1953-6SGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6TG	-	AIC1953-6TGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6UG	-	AIC1953-6UGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6VG	-	AIC1953-6VGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6WG	-	AIC1953-6WGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6XG	-	AIC1953-6XGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6YG	-	AIC1953-6YGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU6ZG	-	AIC1953-6ZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU73G	-	AIC1953-73GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU74G	-	AIC1953-74GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU75G	-	AIC1953-75GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU76G	-	AIC1953-76GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU77G	-	AIC1953-77GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU78G	-	AIC1953-78GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7AG	-	AIC1953-7AGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7BG	-	AIC1953-7BGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7CG	-	AIC1953-7CGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7DG	-	AIC1953-7DGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7EG	-	AIC1953-7EGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7FG	-	AIC1953-7FGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7GG	-	AIC1953-7GGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7HG	-	AIC1953-7HGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7IG	-	AIC1953-7IGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7JG	-	AIC1953-7JGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7KG	-	AIC1953-7KGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7LG	-	AIC1953-7LGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7MG	-	AIC1953-7MGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7NG	-	AIC1953-7NGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7OG	-	AIC1953-7OGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7PG	-	AIC1953-7PGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7QG	-	AIC1953-7QGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7RG	-	AIC1953-7RGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7SG	-	AIC1953-7SGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7TG	-	AIC1953-7TGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7UG	-	AIC1953-7UGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7VG	-	AIC1953-7VGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7WG	-	AIC1953-7WGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7XG	-	AIC1953-7XGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7YG	-	AIC1953-7YGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU7ZG	-	AIC1953-7ZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU83G	-	AIC1953-83GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU84G	-	AIC1953-84GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU85G	-	AIC1953-85GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU86G	-	AIC1953-86GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU87G	-	AIC1953-87GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU88G	-	AIC1953-88GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8AG	-	AIC1953-8AGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8BG	-	AIC1953-8BGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8CG	-	AIC1953-8CGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8DG	-	AIC1953-8DGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8EG	-	AIC1953-8EGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8FG	-	AIC1953-8FGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8GG	-	AIC1953-8GGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8HG	-	AIC1953-8HGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8IG	-	AIC1953-8IGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8JG	-	AIC1953-8JGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8KG	-	AIC1953-8KGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8LG	-	AIC1953-8LGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8MG	-	AIC1953-8MGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8NG	-	AIC1953-8NGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8OG	-	AIC1953-8OGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8PG	-	AIC1953-8PGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8QG	-	AIC1953-8QGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8RG	-	AIC1953-8RGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8SG	-	AIC1953-8SGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GU8TG	-	AIC1953-8TGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8UG	-	AIC1953-8UGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8VG	-	AIC1953-8VGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8WG	-	AIC1953-8WGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8XG	-	AIC1953-8XGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8YG	-	AIC1953-8YGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GU8ZG	-	AIC1953-8ZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUA3G	-	AIC1953-A3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUA4G	-	AIC1953-A4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUA5G	-	AIC1953-A5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUA6G	-	AIC1953-A6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUA7G	-	AIC1953-A7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUA8G	-	AIC1953-A8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAAG	-	AIC1953-AAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUABG	-	AIC1953-ABGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUACG	-	AIC1953-ACGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUADG	-	AIC1953-ADGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAEG	-	AIC1953-AEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAFG	-	AIC1953-AFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAGG	-	AIC1953-AGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAHG	-	AIC1953-AHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAIG	-	AIC1953-AIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAJG	-	AIC1953-AJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAKG	-	AIC1953-AKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUALG	-	AIC1953-ALGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAMG	-	AIC1953-AMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUANG	-	AIC1953-ANGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAOG	-	AIC1953-AOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAPG	-	AIC1953-APGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAQG	-	AIC1953-AQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUARG	-	AIC1953-ARGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUASG	-	AIC1953-ASGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUATG	-	AIC1953-ATGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAUG	-	AIC1953-AUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAVG	-	AIC1953-AVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAWG	-	AIC1953-AWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAXG	-	AIC1953-AXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAYG	-	AIC1953-AYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUAZG	-	AIC1953-AZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUB3G	-	AIC1953-B3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUB4G	-	AIC1953-B4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUB5G	-	AIC1953-B5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUB6G	-	AIC1953-B6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUB7G	-	AIC1953-B7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUB8G	-	AIC1953-B8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBAG	-	AIC1953-BAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBBG	-	AIC1953-BBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBCG	-	AIC1953-BCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBDG	-	AIC1953-BDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBEG	-	AIC1953-BEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBFG	-	AIC1953-BFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBGG	-	AIC1953-BGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBHG	-	AIC1953-BHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBIG	-	AIC1953-BIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBJG	-	AIC1953-BJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBKG	-	AIC1953-BKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBLG	-	AIC1953-BLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBMG	-	AIC1953-BMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBNG	-	AIC1953-BNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBOG	-	AIC1953-BOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBPG	-	AIC1953-BPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBQG	-	AIC1953-BQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBRG	-	AIC1953-BRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBSG	-	AIC1953-BSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBTG	-	AIC1953-BTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBUG	-	AIC1953-BUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBVG	-	AIC1953-BVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBWG	-	AIC1953-BWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBXG	-	AIC1953-BXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUBYG	-	AIC1953-BYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GUBZG	-	AIC1953-BZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUC3G	-	AIC1953-C3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUC4G	-	AIC1953-C4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUC5G	-	AIC1953-C5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUC6G	-	AIC1953-C6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUC7G	-	AIC1953-C7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUC8G	-	AIC1953-C8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCAG	-	AIC1953-CAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCBG	-	AIC1953-CBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCCG	-	AIC1953-CCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCDG	-	AIC1953-CDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCEG	-	AIC1953-CEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCFG	-	AIC1953-CFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCGG	-	AIC1953-CGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCHG	-	AIC1953-CHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCIG	-	AIC1953-CIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCJG	-	AIC1953-CJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCKG	-	AIC1953-CKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCLG	-	AIC1953-CLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCMG	-	AIC1953-CMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCNG	-	AIC1953-CNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCOG	-	AIC1953-COGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCPG	-	AIC1953-CPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCQG	-	AIC1953-CQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCRG	-	AIC1953-CRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCSG	-	AIC1953-CSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCTG	-	AIC1953-CTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCUG	-	AIC1953-CUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCVG	-	AIC1953-CVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCWG	-	AIC1953-CWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCXG	-	AIC1953-CXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCYG	-	AIC1953-CYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUCZG	-	AIC1953-CZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUD3G	-	AIC1953-D3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUD4G	-	AIC1953-D4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUD5G	-	AIC1953-D5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUD6G	-	AIC1953-D6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUD7G	-	AIC1953-D7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUD8G	-	AIC1953-D8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDAG	-	AIC1953-DAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDBG	-	AIC1953-DBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDCG	-	AIC1953-DCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDDG	-	AIC1953-DDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDEG	-	AIC1953-DEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDFG	-	AIC1953-DFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDGG	-	AIC1953-DGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDHG	-	AIC1953-DHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDIG	-	AIC1953-DIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDJG	-	AIC1953-DJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDKG	-	AIC1953-DKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDLG	-	AIC1953-DLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDMG	-	AIC1953-DMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDNG	-	AIC1953-DNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDOG	-	AIC1953-DOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDPG	-	AIC1953-DPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDQG	-	AIC1953-DQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDRG	-	AIC1953-DRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDSG	-	AIC1953-DSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDTG	-	AIC1953-DTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDUG	-	AIC1953-DUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDVG	-	AIC1953-DVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDWG	-	AIC1953-DWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDXG	-	AIC1953-DXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDYG	-	AIC1953-DYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUDZG	-	AIC1953-DZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUE3G	-	AIC1953-E3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUE4G	-	AIC1953-E4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUE5G	-	AIC1953-E5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUE6G	-	AIC1953-E6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUE7G	-	AIC1953-E7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GUE8G	-	AIC1953-E8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEAG	-	AIC1953-EAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEBG	-	AIC1953-EBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUECG	-	AIC1953-ECGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEDG	-	AIC1953-EDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEEG	-	AIC1953-EEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEFG	-	AIC1953-EFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEGG	-	AIC1953-EGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEHG	-	AIC1953-EHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEIG	-	AIC1953-EIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEJG	-	AIC1953-EJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEKG	-	AIC1953-EKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUELG	-	AIC1953-ELGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEMG	-	AIC1953-EMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUENG	-	AIC1953-ENGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEOG	-	AIC1953-EOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEPG	-	AIC1953-EPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEQG	-	AIC1953-EQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUERG	-	AIC1953-ERGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUESG	-	AIC1953-ESGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUETG	-	AIC1953-ETGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEUG	-	AIC1953-EUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEVG	-	AIC1953-EVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEWG	-	AIC1953-EWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEXG	-	AIC1953-EXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEYG	-	AIC1953-EYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUEZG	-	AIC1953-EZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUF3G	-	AIC1953-F3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUF4G	-	AIC1953-F4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUF5G	-	AIC1953-F5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUF6G	-	AIC1953-F6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUF7G	-	AIC1953-F7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUF8G	-	AIC1953-F8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFAG	-	AIC1953-FAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFBG	-	AIC1953-FBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFCG	-	AIC1953-FCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFDG	-	AIC1953-FDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFEG	-	AIC1953-FEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFFG	-	AIC1953-FFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFGG	-	AIC1953-FGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFHG	-	AIC1953-FHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFIG	-	AIC1953-FIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFJG	-	AIC1953-FJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFKG	-	AIC1953-FKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFLG	-	AIC1953-FLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFMG	-	AIC1953-FMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFNG	-	AIC1953-FNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFOG	-	AIC1953-FOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFPG	-	AIC1953-FPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFQG	-	AIC1953-FQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFRG	-	AIC1953-FRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFSG	-	AIC1953-FSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFTG	-	AIC1953-FTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFUG	-	AIC1953-FUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFVG	-	AIC1953-FVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFWG	-	AIC1953-FWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFXG	-	AIC1953-FXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFYG	-	AIC1953-FYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUFZG	-	AIC1953-FZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUG3G	-	AIC1953-G3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUG4G	-	AIC1953-G4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUG5G	-	AIC1953-G5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUG6G	-	AIC1953-G6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUG7G	-	AIC1953-G7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUG8G	-	AIC1953-G8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGAG	-	AIC1953-GAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGBG	-	AIC1953-GBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGCG	-	AIC1953-GCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGDG	-	AIC1953-GDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGEG	-	AIC1953-GEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GUGFG	-	AIC1953-GFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGGG	-	AIC1953-GGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGHG	-	AIC1953-GHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGIG	-	AIC1953-GIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGJG	-	AIC1953-GJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGKG	-	AIC1953-GKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGLG	-	AIC1953-GLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGMG	-	AIC1953-GMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGNG	-	AIC1953-GNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGOG	-	AIC1953-GOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGPG	-	AIC1953-GPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGQG	-	AIC1953-GQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGRG	-	AIC1953-GRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGSG	-	AIC1953-GSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGTG	-	AIC1953-GTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGUG	-	AIC1953-GUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGVG	-	AIC1953-GVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGWG	-	AIC1953-GWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGXG	-	AIC1953-GXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGYG	-	AIC1953-GYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUGZG	-	AIC1953-GZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUH3G	-	AIC1953-H3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUH4G	-	AIC1953-H4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUH5G	-	AIC1953-H5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUH6G	-	AIC1953-H6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUH7G	-	AIC1953-H7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUH8G	-	AIC1953-H8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHAG	-	AIC1953-HAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHBG	-	AIC1953-HBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHCG	-	AIC1953-HCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHDG	-	AIC1953-HDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHEG	-	AIC1953-HEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHFG	-	AIC1953-HFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHGG	-	AIC1953-HGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHHG	-	AIC1953-HHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHIG	-	AIC1953-HIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHJG	-	AIC1953-HJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHKG	-	AIC1953-HKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHLG	-	AIC1953-HLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHMG	-	AIC1953-HMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHNG	-	AIC1953-HNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHOG	-	AIC1953-HOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHPG	-	AIC1953-HPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHQG	-	AIC1953-HQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHRG	-	AIC1953-HRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHSG	-	AIC1953-HSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHTG	-	AIC1953-HTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHUG	-	AIC1953-HUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHVG	-	AIC1953-HVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHWG	-	AIC1953-HWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHXG	-	AIC1953-HXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHYG	-	AIC1953-HYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUHZG	-	AIC1953-HZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUI3G	-	AIC1953-I3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUI4G	-	AIC1953-I4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUI5G	-	AIC1953-I5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUI6G	-	AIC1953-I6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUI7G	-	AIC1953-I7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUI8G	-	AIC1953-I8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIAG	-	AIC1953-IAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIBG	-	AIC1953-IBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUICG	-	AIC1953-ICGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIDG	-	AIC1953-IDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIEG	-	AIC1953-IEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIFG	-	AIC1953-IFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIGG	-	AIC1953-IGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIHG	-	AIC1953-IHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIIG	-	AIC1953-IIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIJG	-	AIC1953-IJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIKG	-	AIC1953-IKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GUILG	-	AIC1953-ILGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIMG	-	AIC1953-IMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUING	-	AIC1953-INGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIOG	-	AIC1953-IOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIPG	-	AIC1953-IPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIQG	-	AIC1953-IQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIRG	-	AIC1953-IRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUISG	-	AIC1953-ISGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUITG	-	AIC1953-ITGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIUG	-	AIC1953-IUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIVG	-	AIC1953-IVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIWG	-	AIC1953-IWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIXG	-	AIC1953-IXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIYG	-	AIC1953-IYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUIZG	-	AIC1953-IZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJ3G	-	AIC1953-J3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJ4G	-	AIC1953-J4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJ5G	-	AIC1953-J5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJ6G	-	AIC1953-J6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJ7G	-	AIC1953-J7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJ8G	-	AIC1953-J8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJAG	-	AIC1953-JAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJBG	-	AIC1953-JBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJCG	-	AIC1953-JCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJDG	-	AIC1953-JDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJEG	-	AIC1953-JEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJFG	-	AIC1953-JFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJGG	-	AIC1953-JGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJHG	-	AIC1953-JHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJIG	-	AIC1953-JIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJJG	-	AIC1953-JJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJKG	-	AIC1953-JKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJLG	-	AIC1953-JLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJMG	-	AIC1953-JMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJNG	-	AIC1953-JNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJOG	-	AIC1953-JOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJPG	-	AIC1953-JPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJQG	-	AIC1953-JQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJRG	-	AIC1953-JRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJSG	-	AIC1953-JSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJTG	-	AIC1953-JTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJUG	-	AIC1953-JUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJVG	-	AIC1953-JVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJWG	-	AIC1953-JWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJXG	-	AIC1953-JXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJYG	-	AIC1953-JYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUJZG	-	AIC1953-JZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUK3G	-	AIC1953-K3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUK4G	-	AIC1953-K4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUK5G	-	AIC1953-K5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUK6G	-	AIC1953-K6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUK7G	-	AIC1953-K7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUK8G	-	AIC1953-K8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKAG	-	AIC1953-KAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKBG	-	AIC1953-KBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKCG	-	AIC1953-KCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKDG	-	AIC1953-KDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKEG	-	AIC1953-KEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKFG	-	AIC1953-KFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKGG	-	AIC1953-KGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKHG	-	AIC1953-KHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKIG	-	AIC1953-KIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKJG	-	AIC1953-KJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKKG	-	AIC1953-KKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKLG	-	AIC1953-KLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKMG	-	AIC1953-KMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKNG	-	AIC1953-KNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKOG	-	AIC1953-KOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKPG	-	AIC1953-KPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKQG	-	AIC1953-KQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GUKRG	-	AIC1953-KRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKSG	-	AIC1953-KSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKTG	-	AIC1953-KTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKUG	-	AIC1953-KUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKVG	-	AIC1953-KVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKWG	-	AIC1953-KWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKXG	-	AIC1953-KXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKYG	-	AIC1953-KYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUKZG	-	AIC1953-KZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUL3G	-	AIC1953-L3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUL4G	-	AIC1953-L4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUL5G	-	AIC1953-L5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUL6G	-	AIC1953-L6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUL7G	-	AIC1953-L7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUL8G	-	AIC1953-L8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULAG	-	AIC1953-LAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULBG	-	AIC1953-LBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULCG	-	AIC1953-LCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULDG	-	AIC1953-LDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULEG	-	AIC1953-LEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULFG	-	AIC1953-LFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULGG	-	AIC1953-LGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULHG	-	AIC1953-LHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULIG	-	AIC1953-LIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULJG	-	AIC1953-LJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULKG	-	AIC1953-LKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULLG	-	AIC1953-LLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULMG	-	AIC1953-LMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULNG	-	AIC1953-LNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULOG	-	AIC1953-LOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULPG	-	AIC1953-LPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULQG	-	AIC1953-LQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULRG	-	AIC1953-LRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULSG	-	AIC1953-LSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULTG	-	AIC1953-LTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULUG	-	AIC1953-LUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULVG	-	AIC1953-LVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULWG	-	AIC1953-LWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULXG	-	AIC1953-LXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULYG	-	AIC1953-LYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GULZG	-	AIC1953-LZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUM3G	-	AIC1953-M3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUM4G	-	AIC1953-M4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUM5G	-	AIC1953-M5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUM6G	-	AIC1953-M6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUM7G	-	AIC1953-M7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUM8G	-	AIC1953-M8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMAG	-	AIC1953-MAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMBG	-	AIC1953-MBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMCG	-	AIC1953-MCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMDG	-	AIC1953-MDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMEG	-	AIC1953-MEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMFG	-	AIC1953-MFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMGG	-	AIC1953-MGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMHG	-	AIC1953-MHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMIG	-	AIC1953-MIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMJG	-	AIC1953-MJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMKG	-	AIC1953-MKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMLG	-	AIC1953-MLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMMG	-	AIC1953-MMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMNG	-	AIC1953-MNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMOG	-	AIC1953-MOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMPG	-	AIC1953-MPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMQG	-	AIC1953-MQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMRG	-	AIC1953-MRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMSG	-	AIC1953-MSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMTG	-	AIC1953-MTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMUG	-	AIC1953-MUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMVG	-	AIC1953-MVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMWG	-	AIC1953-MWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GUMXG	-	AIC1953-MXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMYG	-	AIC1953-MYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUMZG	-	AIC1953-MZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUN3G	-	AIC1953-N3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUN4G	-	AIC1953-N4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUN5G	-	AIC1953-N5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUN6G	-	AIC1953-N6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUN7G	-	AIC1953-N7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUN8G	-	AIC1953-N8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNAG	-	AIC1953-NAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNBG	-	AIC1953-NBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNCG	-	AIC1953-NCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNDG	-	AIC1953-NDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNEG	-	AIC1953-NEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNFG	-	AIC1953-NFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNGG	-	AIC1953-NGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNHG	-	AIC1953-NHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNIG	-	AIC1953-NIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNJG	-	AIC1953-NJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNKG	-	AIC1953-NKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNLG	-	AIC1953-NLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNMG	-	AIC1953-NMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNNG	-	AIC1953-NNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNOG	-	AIC1953-NOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNPG	-	AIC1953-NPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNQG	-	AIC1953-NQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNRG	-	AIC1953-NRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNSG	-	AIC1953-NSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNTG	-	AIC1953-NTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNUG	-	AIC1953-NUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNVG	-	AIC1953-NVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNWG	-	AIC1953-NWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNXG	-	AIC1953-NXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNYG	-	AIC1953-NYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUNZG	-	AIC1953-NZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUO3G	-	AIC1953-O3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUO4G	-	AIC1953-O4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUO5G	-	AIC1953-O5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUO6G	-	AIC1953-O6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUO7G	-	AIC1953-O7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUO8G	-	AIC1953-O8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOAG	-	AIC1953-OAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOBG	-	AIC1953-OBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOCG	-	AIC1953-OCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUODG	-	AIC1953-ODGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOEG	-	AIC1953-OEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOFG	-	AIC1953-OFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOGG	-	AIC1953-OGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOHG	-	AIC1953-OHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOIG	-	AIC1953-OIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOJG	-	AIC1953-OJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOKG	-	AIC1953-OKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOLG	-	AIC1953-OLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOMG	-	AIC1953-OMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUONG	-	AIC1953-ONGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOOG	-	AIC1953-OOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOPG	-	AIC1953-OPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOQG	-	AIC1953-OQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUORG	-	AIC1953-ORGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOSG	-	AIC1953-OSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOTG	-	AIC1953-OTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOUG	-	AIC1953-OUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOVG	-	AIC1953-OVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOWG	-	AIC1953-OWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOXG	-	AIC1953-OXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOYG	-	AIC1953-OYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUOZG	-	AIC1953-OZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUP3G	-	AIC1953-P3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUP4G	-	AIC1953-P4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUP5G	-	AIC1953-P5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GUP6G	-	AIC1953-P6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUP7G	-	AIC1953-P7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUP8G	-	AIC1953-P8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPAG	-	AIC1953-PAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPBG	-	AIC1953-PBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPCG	-	AIC1953-PCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPDG	-	AIC1953-PDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPEG	-	AIC1953-PEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPFG	-	AIC1953-PFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPGG	-	AIC1953-PGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPHG	-	AIC1953-PHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPIG	-	AIC1953-PIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPJG	-	AIC1953-PJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPKG	-	AIC1953-PKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPLG	-	AIC1953-PLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPMG	-	AIC1953-PMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPNG	-	AIC1953-PNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPOG	-	AIC1953-POGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPPG	-	AIC1953-PPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPQG	-	AIC1953-PQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPRG	-	AIC1953-PRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPSG	-	AIC1953-PSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPTG	-	AIC1953-PTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPUG	-	AIC1953-PUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPVG	-	AIC1953-PVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPWG	-	AIC1953-PWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPXG	-	AIC1953-PXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPYG	-	AIC1953-PYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUPZG	-	AIC1953-PZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQ3G	-	AIC1953-Q3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQ4G	-	AIC1953-Q4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQ5G	-	AIC1953-Q5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQ6G	-	AIC1953-Q6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQ7G	-	AIC1953-Q7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQ8G	-	AIC1953-Q8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQAG	-	AIC1953-QAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQBG	-	AIC1953-QBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQCG	-	AIC1953-QCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQDG	-	AIC1953-QDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQEG	-	AIC1953-QEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQFG	-	AIC1953-QFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQGG	-	AIC1953-QGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQHG	-	AIC1953-QHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQIG	-	AIC1953-QIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQJG	-	AIC1953-QJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQKG	-	AIC1953-QKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQLG	-	AIC1953-QLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQMG	-	AIC1953-QMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQNG	-	AIC1953-QNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQOG	-	AIC1953-QOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQPG	-	AIC1953-QPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQQG	-	AIC1953-QQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQRG	-	AIC1953-QRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQSG	-	AIC1953-QSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQTG	-	AIC1953-QTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQUG	-	AIC1953-QUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQVG	-	AIC1953-QVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQWG	-	AIC1953-QWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQXG	-	AIC1953-QXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQYG	-	AIC1953-QYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUQZG	-	AIC1953-QZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUR3G	-	AIC1953-R3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUR4G	-	AIC1953-R4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUR5G	-	AIC1953-R5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUR6G	-	AIC1953-R6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUR7G	-	AIC1953-R7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUR8G	-	AIC1953-R8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURAG	-	AIC1953-RAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURBG	-	AIC1953-RBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURCG	-	AIC1953-RCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GURDG	-	AIC1953-RDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUREG	-	AIC1953-REGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURFG	-	AIC1953-RFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURGG	-	AIC1953-RGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURHG	-	AIC1953-RHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURIG	-	AIC1953-RIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURJG	-	AIC1953-RJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURKG	-	AIC1953-RKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURLG	-	AIC1953-RLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURMG	-	AIC1953-RMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURNG	-	AIC1953-RNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUROG	-	AIC1953-ROGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURPG	-	AIC1953-RPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURQG	-	AIC1953-RQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURRG	-	AIC1953-RRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURSG	-	AIC1953-RSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURTG	-	AIC1953-RTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURUG	-	AIC1953-RUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURVG	-	AIC1953-RVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURWG	-	AIC1953-RWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURXG	-	AIC1953-RXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURYG	-	AIC1953-RYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GURZG	-	AIC1953-RZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUS3G	-	AIC1953-S3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUS4G	-	AIC1953-S4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUS5G	-	AIC1953-S5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUS6G	-	AIC1953-S6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUS7G	-	AIC1953-S7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUS8G	-	AIC1953-S8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSAG	-	AIC1953-SAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSBG	-	AIC1953-SBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSCG	-	AIC1953-SCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSDG	-	AIC1953-SDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSEG	-	AIC1953-SEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSFG	-	AIC1953-SFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSGG	-	AIC1953-SGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSHG	-	AIC1953-SHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSIG	-	AIC1953-SIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSJG	-	AIC1953-SJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSKG	-	AIC1953-SKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSLG	-	AIC1953-SLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSMG	-	AIC1953-SMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSNG	-	AIC1953-SNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSOG	-	AIC1953-SOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSPG	-	AIC1953-SPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSQG	-	AIC1953-SQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSRG	-	AIC1953-SRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSSG	-	AIC1953-SSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSTG	-	AIC1953-STGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSUG	-	AIC1953-SUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSVG	-	AIC1953-SVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSWG	-	AIC1953-SWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSXG	-	AIC1953-SXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSYG	-	AIC1953-SYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUSZG	-	AIC1953-SZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUT3G	-	AIC1953-T3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUT4G	-	AIC1953-T4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUT5G	-	AIC1953-T5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUT6G	-	AIC1953-T6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUT7G	-	AIC1953-T7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUT8G	-	AIC1953-T8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTAG	-	AIC1953-TAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTBG	-	AIC1953-TBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTCG	-	AIC1953-TCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTDG	-	AIC1953-TDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTEG	-	AIC1953-TEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTFG	-	AIC1953-TFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTGG	-	AIC1953-TGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTHG	-	AIC1953-THGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTIG	-	AIC1953-TIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GUTJG	-	AIC1953-TJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTKG	-	AIC1953-TKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTLG	-	AIC1953-TLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTMG	-	AIC1953-TMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTNG	-	AIC1953-TNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTOG	-	AIC1953-TOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTPG	-	AIC1953-TPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTQG	-	AIC1953-TQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTRG	-	AIC1953-TRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTSG	-	AIC1953-TSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTTG	-	AIC1953-TTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTUG	-	AIC1953-TUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTVG	-	AIC1953-TVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTWG	-	AIC1953-TWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTXG	-	AIC1953-TXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTYG	-	AIC1953-TYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUTZG	-	AIC1953-TZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUU3G	-	AIC1953-U3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUU4G	-	AIC1953-U4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUU5G	-	AIC1953-U5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUU6G	-	AIC1953-U6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUU7G	-	AIC1953-U7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUU8G	-	AIC1953-U8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUAG	-	AIC1953-UAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUBG	-	AIC1953-UBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUCG	-	AIC1953-UCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUDG	-	AIC1953-UDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUEG	-	AIC1953-UEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUFG	-	AIC1953-UFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUGG	-	AIC1953-UGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUHG	-	AIC1953-UHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUIG	-	AIC1953-UIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUJG	-	AIC1953-UJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUKG	-	AIC1953-UKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUULG	-	AIC1953-ULGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUMG	-	AIC1953-UMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUNG	-	AIC1953-UNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUOG	-	AIC1953-UOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUPG	-	AIC1953-UPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUQG	-	AIC1953-UQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUURG	-	AIC1953-URGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUSG	-	AIC1953-USGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUTG	-	AIC1953-UTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUUG	-	AIC1953-UUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUVG	-	AIC1953-UVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUWG	-	AIC1953-UWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUXG	-	AIC1953-UXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUYG	-	AIC1953-UYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUUZG	-	AIC1953-UZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUV3G	-	AIC1953-V3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUV4G	-	AIC1953-V4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUV5G	-	AIC1953-V5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUV6G	-	AIC1953-V6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUV7G	-	AIC1953-V7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUV8G	-	AIC1953-V8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVAG	-	AIC1953-VAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVBG	-	AIC1953-VBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVCG	-	AIC1953-VCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVDG	-	AIC1953-VDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVEG	-	AIC1953-VEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVFG	-	AIC1953-VFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVGG	-	AIC1953-VGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVHG	-	AIC1953-VHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVIG	-	AIC1953-VIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVJG	-	AIC1953-VJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVKG	-	AIC1953-VKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVLG	-	AIC1953-VLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVMG	-	AIC1953-VMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVNG	-	AIC1953-VNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVOG	-	AIC1953-VOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GUVPG	-	AIC1953-VPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVQG	-	AIC1953-VQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVRG	-	AIC1953-VRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVSG	-	AIC1953-VSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVTG	-	AIC1953-VTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVUG	-	AIC1953-VUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVVG	-	AIC1953-VVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVWG	-	AIC1953-VWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVXG	-	AIC1953-VXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVYG	-	AIC1953-VYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUVZG	-	AIC1953-VZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUW3G	-	AIC1953-W3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUW4G	-	AIC1953-W4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUW5G	-	AIC1953-W5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUW6G	-	AIC1953-W6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUW7G	-	AIC1953-W7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUW8G	-	AIC1953-W8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWAG	-	AIC1953-WAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWBG	-	AIC1953-WBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWCG	-	AIC1953-WCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWDG	-	AIC1953-WDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWEG	-	AIC1953-WEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWFG	-	AIC1953-WFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWGG	-	AIC1953-WGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWHG	-	AIC1953-WHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWIG	-	AIC1953-WIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWJG	-	AIC1953-WJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWKG	-	AIC1953-WKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWLG	-	AIC1953-WLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWMG	-	AIC1953-WMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWNG	-	AIC1953-WNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWOG	-	AIC1953-WOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWPG	-	AIC1953-WPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWQG	-	AIC1953-WQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWRG	-	AIC1953-WRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWSG	-	AIC1953-WSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWTG	-	AIC1953-WTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWUG	-	AIC1953-WUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWVG	-	AIC1953-WVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWWG	-	AIC1953-WWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWXG	-	AIC1953-WXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWYG	-	AIC1953-WYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUWZG	-	AIC1953-WZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUX3G	-	AIC1953-X3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUX4G	-	AIC1953-X4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUX5G	-	AIC1953-X5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUX6G	-	AIC1953-X6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUX7G	-	AIC1953-X7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUX8G	-	AIC1953-X8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXAG	-	AIC1953-XAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXBG	-	AIC1953-XBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXCG	-	AIC1953-XCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXDG	-	AIC1953-XDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXEG	-	AIC1953-XEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXFG	-	AIC1953-XFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXGG	-	AIC1953-XGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXHG	-	AIC1953-XHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXIG	-	AIC1953-XIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXJG	-	AIC1953-XJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXKG	-	AIC1953-XKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXLG	-	AIC1953-XLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXMG	-	AIC1953-XMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXNG	-	AIC1953-XNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXOG	-	AIC1953-XOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXPG	-	AIC1953-XPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXQG	-	AIC1953-XQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXRG	-	AIC1953-XRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXSG	-	AIC1953-XSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXTG	-	AIC1953-XTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXUG	-	AIC1953-XUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GUXVG	-	AIC1953-XVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXWG	-	AIC1953-XWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXXG	-	AIC1953-XXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXYG	-	AIC1953-XYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUXZG	-	AIC1953-XZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUY3G	-	AIC1953-Y3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUY4G	-	AIC1953-Y4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUY5G	-	AIC1953-Y5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUY6G	-	AIC1953-Y6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUY7G	-	AIC1953-Y7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUY8G	-	AIC1953-Y8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYAG	-	AIC1953-YAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYBG	-	AIC1953-YBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYCG	-	AIC1953-YCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYDG	-	AIC1953-YDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYEG	-	AIC1953-YEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYFG	-	AIC1953-YFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYGG	-	AIC1953-YGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYHG	-	AIC1953-YHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYIG	-	AIC1953-YIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYJG	-	AIC1953-YJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYKG	-	AIC1953-YKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYLG	-	AIC1953-YLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYMG	-	AIC1953-YMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYNG	-	AIC1953-YNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYOG	-	AIC1953-YOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYPG	-	AIC1953-YPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYQG	-	AIC1953-YQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYRG	-	AIC1953-YRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYSG	-	AIC1953-YSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYTG	-	AIC1953-YTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYUG	-	AIC1953-YUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYVG	-	AIC1953-YVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYWG	-	AIC1953-YWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYXG	-	AIC1953-YXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYYG	-	AIC1953-YYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUYZG	-	AIC1953-YZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZ3G	-	AIC1953-Z3GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZ4G	-	AIC1953-Z4GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZ5G	-	AIC1953-Z5GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZ6G	-	AIC1953-Z6GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZ7G	-	AIC1953-Z7GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZ8G	-	AIC1953-Z8GG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZAG	-	AIC1953-ZAGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/0.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZBG	-	AIC1953-ZBGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/0.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZCG	-	AIC1953-ZCGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZDG	-	AIC1953-ZDGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZEG	-	AIC1953-ZEGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZFG	-	AIC1953-ZFGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZGG	-	AIC1953-ZGGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZHG	-	AIC1953-ZHGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZIG	-	AIC1953-ZIGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZJG	-	AIC1953-ZJGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZKG	-	AIC1953-ZKGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZLG	-	AIC1953-ZLGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZMG	-	AIC1953-ZMGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZNG	-	AIC1953-ZNGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZOG	-	AIC1953-ZOGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZPG	-	AIC1953-ZPGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZQG	-	AIC1953-ZQGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZRG	-	AIC1953-ZRGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZSG	-	AIC1953-ZSGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZTG	-	AIC1953-ZTGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZUG	-	AIC1953-ZUGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZVG	-	AIC1953-ZVGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZWG	-	AIC1953-ZWGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZXG	-	AIC1953-ZXGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZYG	-	AIC1953-ZYGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GUZZG	-	AIC1953-ZZGG6A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 600mA, +CE	SOT-23-6	33zc	VR19	7b	Aic
GV	-	AAT3221IJS-3.1	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GV	-	RP152N020C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GV33G	-	AIC1953-33GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV34G	-	AIC1953-34GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV35G	-	AIC1953-35GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV36G	-	AIC1953-36GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV37G	-	AIC1953-37GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV38G	-	AIC1953-38GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3AG	-	AIC1953-3AGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3BG	-	AIC1953-3BGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3CG	-	AIC1953-3CGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3DG	-	AIC1953-3DGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3EG	-	AIC1953-3EGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3FG	-	AIC1953-3FGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3GG	-	AIC1953-3GGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3HG	-	AIC1953-3HGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3IG	-	AIC1953-3IGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3JG	-	AIC1953-3JGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3KG	-	AIC1953-3KGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3LG	-	AIC1953-3LGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3MG	-	AIC1953-3MGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3NG	-	AIC1953-3NGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3OG	-	AIC1953-3OGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3PG	-	AIC1953-3PGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3QG	-	AIC1953-3QGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3RG	-	AIC1953-3RGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3SG	-	AIC1953-3SGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3TG	-	AIC1953-3TGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3UG	-	AIC1953-3UGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3VG	-	AIC1953-3VGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3WG	-	AIC1953-3WGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3XG	-	AIC1953-3XGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3YG	-	AIC1953-3YGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV3ZG	-	AIC1953-3ZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV43G	-	AIC1953-43GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV44G	-	AIC1953-44GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV45G	-	AIC1953-45GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV46G	-	AIC1953-46GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV47G	-	AIC1953-47GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV48G	-	AIC1953-48GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4AG	-	AIC1953-4AGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4BG	-	AIC1953-4BGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4CG	-	AIC1953-4CGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4DG	-	AIC1953-4DGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4EG	-	AIC1953-4EGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4FG	-	AIC1953-4FGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4GG	-	AIC1953-4GGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4HG	-	AIC1953-4HGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4IG	-	AIC1953-4IGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4JG	-	AIC1953-4JGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4KG	-	AIC1953-4KGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4LG	-	AIC1953-4LGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4MG	-	AIC1953-4MGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4NG	-	AIC1953-4NGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4OG	-	AIC1953-4OGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4PG	-	AIC1953-4PGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4QG	-	AIC1953-4QGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4RG	-	AIC1953-4RGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4SG	-	AIC1953-4SGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4TG	-	AIC1953-4TGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4UG	-	AIC1953-4UGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4VG	-	AIC1953-4VGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4WG	-	AIC1953-4WGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4XG	-	AIC1953-4XGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4YG	-	AIC1953-4YGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV4ZG	-	AIC1953-4ZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV53G	-	AIC1953-53GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV54G	-	AIC1953-54GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV55G	-	AIC1953-55GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV56G	-	AIC1953-56GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV57G	-	AIC1953-57GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GV58G	-	AIC1953-58GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5AG	-	AIC1953-5AGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5BG	-	AIC1953-5BGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5CG	-	AIC1953-5CGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5DG	-	AIC1953-5DGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5EG	-	AIC1953-5EGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5FG	-	AIC1953-5FGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5GG	-	AIC1953-5GGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5HG	-	AIC1953-5HGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5IG	-	AIC1953-5IGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5JG	-	AIC1953-5JGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5KG	-	AIC1953-5KGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5LG	-	AIC1953-5LGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5MG	-	AIC1953-5MGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5NG	-	AIC1953-5NGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5OG	-	AIC1953-5OGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5PG	-	AIC1953-5PGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5QG	-	AIC1953-5QGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5RG	-	AIC1953-5RGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5SG	-	AIC1953-5SGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5TG	-	AIC1953-5TGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5UG	-	AIC1953-5UGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5VG	-	AIC1953-5VGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5WG	-	AIC1953-5WGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5XG	-	AIC1953-5XGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5YG	-	AIC1953-5YGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV5ZG	-	AIC1953-5ZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV63G	-	AIC1953-63GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV64G	-	AIC1953-64GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV65G	-	AIC1953-65GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV66G	-	AIC1953-66GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV67G	-	AIC1953-67GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV68G	-	AIC1953-68GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6AG	-	AIC1953-6AGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6BG	-	AIC1953-6BGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6CG	-	AIC1953-6CGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6DG	-	AIC1953-6DGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6EG	-	AIC1953-6EGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6FG	-	AIC1953-6FGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6GG	-	AIC1953-6GGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6HG	-	AIC1953-6HGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6IG	-	AIC1953-6IGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6JG	-	AIC1953-6JGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6KG	-	AIC1953-6KGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6LG	-	AIC1953-6LGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6MG	-	AIC1953-6MGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6NG	-	AIC1953-6NGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6OG	-	AIC1953-6OGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6PG	-	AIC1953-6PGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6QG	-	AIC1953-6QGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6RG	-	AIC1953-6RGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6SG	-	AIC1953-6SGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6TG	-	AIC1953-6TGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6UG	-	AIC1953-6UGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6VG	-	AIC1953-6VGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6WG	-	AIC1953-6WGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6XG	-	AIC1953-6XGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6YG	-	AIC1953-6YGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV6ZG	-	AIC1953-6ZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV73G	-	AIC1953-73GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV74G	-	AIC1953-74GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV75G	-	AIC1953-75GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV76G	-	AIC1953-76GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV77G	-	AIC1953-77GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV78G	-	AIC1953-78GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7AG	-	AIC1953-7AGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7BG	-	AIC1953-7BGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7CG	-	AIC1953-7CGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7DG	-	AIC1953-7DGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7EG	-	AIC1953-7EGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GV7FG	-	AIC1953-7FGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7GG	-	AIC1953-7GGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7HG	-	AIC1953-7HGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7IG	-	AIC1953-7IGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7JG	-	AIC1953-7JGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7KG	-	AIC1953-7KGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7LG	-	AIC1953-7LGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7MG	-	AIC1953-7MGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7NG	-	AIC1953-7NGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7OG	-	AIC1953-7OGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7PG	-	AIC1953-7PGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7QG	-	AIC1953-7QGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7RG	-	AIC1953-7RGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7SG	-	AIC1953-7SGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7TG	-	AIC1953-7TGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7UG	-	AIC1953-7UGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7VG	-	AIC1953-7VGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7WG	-	AIC1953-7WGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7XG	-	AIC1953-7XGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7YG	-	AIC1953-7YGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV7ZG	-	AIC1953-7ZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV83G	-	AIC1953-83GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV84G	-	AIC1953-84GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV85G	-	AIC1953-85GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV86G	-	AIC1953-86GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV87G	-	AIC1953-87GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV88G	-	AIC1953-88GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8AG	-	AIC1953-8AGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8BG	-	AIC1953-8BGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8CG	-	AIC1953-8CGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8DG	-	AIC1953-8DGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8EG	-	AIC1953-8EGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8FG	-	AIC1953-8FGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8GG	-	AIC1953-8GGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8HG	-	AIC1953-8HGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8IG	-	AIC1953-8IGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8JG	-	AIC1953-8JGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8KG	-	AIC1953-8KGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8LG	-	AIC1953-8LGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8MG	-	AIC1953-8MGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8NG	-	AIC1953-8NGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8OG	-	AIC1953-8OGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8PG	-	AIC1953-8PGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8QG	-	AIC1953-8QGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8RG	-	AIC1953-8RGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8SG	-	AIC1953-8SGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8TG	-	AIC1953-8TGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8UG	-	AIC1953-8UGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8VG	-	AIC1953-8VGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8WG	-	AIC1953-8WGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8XG	-	AIC1953-8XGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8YG	-	AIC1953-8YGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GV8ZG	-	AIC1953-8ZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVA3G	-	AIC1953-A3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVA4G	-	AIC1953-A4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVA5G	-	AIC1953-A5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVA6G	-	AIC1953-A6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVA7G	-	AIC1953-A7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVA8G	-	AIC1953-A8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAAG	-	AIC1953-AAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVABG	-	AIC1953-ABGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVACG	-	AIC1953-ACGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVADG	-	AIC1953-ADGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAEG	-	AIC1953-AEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAFG	-	AIC1953-AFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAGG	-	AIC1953-AGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAHG	-	AIC1953-AHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAIG	-	AIC1953-AIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAJG	-	AIC1953-AJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAKG	-	AIC1953-AKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GVALG	-	AIC1953-ALGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAMG	-	AIC1953-AMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVANG	-	AIC1953-ANGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAOG	-	AIC1953-AOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAPG	-	AIC1953-APGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAQG	-	AIC1953-AQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVARG	-	AIC1953-ARGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVASG	-	AIC1953-ASGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVATG	-	AIC1953-ATGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAUG	-	AIC1953-AUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAVG	-	AIC1953-AVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAWG	-	AIC1953-AWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAXG	-	AIC1953-AXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAYG	-	AIC1953-AYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVAZG	-	AIC1953-AZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVB3G	-	AIC1953-B3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVB4G	-	AIC1953-B4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVB5G	-	AIC1953-B5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVB6G	-	AIC1953-B6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVB7G	-	AIC1953-B7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVB8G	-	AIC1953-B8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBAG	-	AIC1953-BAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBBG	-	AIC1953-BBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBCG	-	AIC1953-BCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBDG	-	AIC1953-BDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBEG	-	AIC1953-BEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBFG	-	AIC1953-BFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBGG	-	AIC1953-BGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBHG	-	AIC1953-BHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBIG	-	AIC1953-BIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBJG	-	AIC1953-BJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBKG	-	AIC1953-BKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBLG	-	AIC1953-BLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBMG	-	AIC1953-BMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBNG	-	AIC1953-BNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBOG	-	AIC1953-BOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBPG	-	AIC1953-BPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBQG	-	AIC1953-BQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBRG	-	AIC1953-BRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBSG	-	AIC1953-BSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBTG	-	AIC1953-BTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBUG	-	AIC1953-BUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBVG	-	AIC1953-BVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBWG	-	AIC1953-BWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBXG	-	AIC1953-BXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBYG	-	AIC1953-BYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVBZG	-	AIC1953-BZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVC3G	-	AIC1953-C3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVC4G	-	AIC1953-C4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVC5G	-	AIC1953-C5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVC6G	-	AIC1953-C6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVC7G	-	AIC1953-C7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVC8G	-	AIC1953-C8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCAG	-	AIC1953-CAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCBG	-	AIC1953-CBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCCG	-	AIC1953-CCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCDG	-	AIC1953-CDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCEG	-	AIC1953-CEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCFG	-	AIC1953-CFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCGG	-	AIC1953-CGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCHG	-	AIC1953-CHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCIG	-	AIC1953-CIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCJG	-	AIC1953-CJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCKG	-	AIC1953-CKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCLG	-	AIC1953-CLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCMG	-	AIC1953-CMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCNG	-	AIC1953-CNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCOG	-	AIC1953-COGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCPG	-	AIC1953-CPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCQG	-	AIC1953-CQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GVCRG	-	AIC1953-CRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCSG	-	AIC1953-CSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCTG	-	AIC1953-CTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCUG	-	AIC1953-CUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCVG	-	AIC1953-CVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCWG	-	AIC1953-CWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCXG	-	AIC1953-CXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCYG	-	AIC1953-CYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVCZG	-	AIC1953-CZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVD3G	-	AIC1953-D3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVD4G	-	AIC1953-D4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVD5G	-	AIC1953-D5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVD6G	-	AIC1953-D6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVD7G	-	AIC1953-D7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVD8G	-	AIC1953-D8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDAG	-	AIC1953-DAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDBG	-	AIC1953-DBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDCG	-	AIC1953-DCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDDG	-	AIC1953-DDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDEG	-	AIC1953-DEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDFG	-	AIC1953-DFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDGG	-	AIC1953-DGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDHG	-	AIC1953-DHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDIG	-	AIC1953-DIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDJG	-	AIC1953-DJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDKG	-	AIC1953-DKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDLG	-	AIC1953-DLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDMG	-	AIC1953-DMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDNG	-	AIC1953-DNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDOG	-	AIC1953-DOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDPG	-	AIC1953-DPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDQG	-	AIC1953-DQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDRG	-	AIC1953-DRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDSG	-	AIC1953-DSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDTG	-	AIC1953-DTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDUG	-	AIC1953-DUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDVG	-	AIC1953-DVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDWG	-	AIC1953-DWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDXG	-	AIC1953-DXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDYG	-	AIC1953-DYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVDZG	-	AIC1953-DZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVE3G	-	AIC1953-E3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVE4G	-	AIC1953-E4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVE5G	-	AIC1953-E5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVE6G	-	AIC1953-E6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVE7G	-	AIC1953-E7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVE8G	-	AIC1953-E8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEAG	-	AIC1953-EAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEBG	-	AIC1953-EBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVECG	-	AIC1953-ECGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEDG	-	AIC1953-EDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEEG	-	AIC1953-EEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEFG	-	AIC1953-EFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEGG	-	AIC1953-EGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEHG	-	AIC1953-EHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEIG	-	AIC1953-EIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEJG	-	AIC1953-EJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEKG	-	AIC1953-EKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVELG	-	AIC1953-ELGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEMG	-	AIC1953-EMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVENG	-	AIC1953-ENGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEOG	-	AIC1953-EOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEPG	-	AIC1953-EPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEQG	-	AIC1953-EQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVERG	-	AIC1953-ERGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVESG	-	AIC1953-ESGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVETG	-	AIC1953-ETGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEUG	-	AIC1953-EUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEVG	-	AIC1953-EVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEWG	-	AIC1953-EWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GVEXG	-	AIC1953-EXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEYG	-	AIC1953-EYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVEZG	-	AIC1953-EZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVF3G	-	AIC1953-F3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVF4G	-	AIC1953-F4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVF5G	-	AIC1953-F5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVF6G	-	AIC1953-F6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVF7G	-	AIC1953-F7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVF8G	-	AIC1953-F8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFAG	-	AIC1953-FAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFBG	-	AIC1953-FBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFCG	-	AIC1953-FCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFDG	-	AIC1953-FDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFEG	-	AIC1953-FEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFFG	-	AIC1953-FFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFGG	-	AIC1953-FGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFHG	-	AIC1953-FHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFIG	-	AIC1953-FIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFJG	-	AIC1953-FJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFKG	-	AIC1953-FKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFLG	-	AIC1953-FLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFMG	-	AIC1953-FMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFNG	-	AIC1953-FNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFOG	-	AIC1953-FOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFPG	-	AIC1953-FPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFQG	-	AIC1953-FQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFRG	-	AIC1953-FRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFSG	-	AIC1953-FSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFTG	-	AIC1953-FTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFUG	-	AIC1953-FUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFVG	-	AIC1953-FVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFWG	-	AIC1953-FWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFXG	-	AIC1953-FXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFYG	-	AIC1953-FYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVFZG	-	AIC1953-FZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVG3G	-	AIC1953-G3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVG4G	-	AIC1953-G4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVG5G	-	AIC1953-G5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVG6G	-	AIC1953-G6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVG7G	-	AIC1953-G7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVG8G	-	AIC1953-G8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGAG	-	AIC1953-GAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGBG	-	AIC1953-GBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGCG	-	AIC1953-GCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGDG	-	AIC1953-GDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGEG	-	AIC1953-GEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGFG	-	AIC1953-GFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGGG	-	AIC1953-GGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGHG	-	AIC1953-GHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGIG	-	AIC1953-GIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGJG	-	AIC1953-GJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGKG	-	AIC1953-GKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGLG	-	AIC1953-GLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGMG	-	AIC1953-GMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGNG	-	AIC1953-GNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGOG	-	AIC1953-GOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGPG	-	AIC1953-GPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGQG	-	AIC1953-GQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGRG	-	AIC1953-GRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGSG	-	AIC1953-GSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGTG	-	AIC1953-GTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGUG	-	AIC1953-GUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGVG	-	AIC1953-GVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGWG	-	AIC1953-GWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGXG	-	AIC1953-GXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGYG	-	AIC1953-GYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVGZG	-	AIC1953-GZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVH3G	-	AIC1953-H3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVH4G	-	AIC1953-H4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVH5G	-	AIC1953-H5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GVH6G	-	AIC1953-H6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVH7G	-	AIC1953-H7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVH8G	-	AIC1953-H8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHAG	-	AIC1953-HAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHBG	-	AIC1953-HBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHCG	-	AIC1953-HCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHDG	-	AIC1953-HDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHEG	-	AIC1953-HEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHFG	-	AIC1953-HFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHGG	-	AIC1953-HGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHHG	-	AIC1953-HHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHIG	-	AIC1953-HIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHJG	-	AIC1953-HJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHKG	-	AIC1953-HKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHLG	-	AIC1953-HLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHMG	-	AIC1953-HMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHNG	-	AIC1953-HNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHOG	-	AIC1953-HOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHPG	-	AIC1953-HPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHQG	-	AIC1953-HQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHRG	-	AIC1953-HRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHSG	-	AIC1953-HSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHTG	-	AIC1953-HTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHUG	-	AIC1953-HUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHVG	-	AIC1953-HVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHWG	-	AIC1953-HWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHXG	-	AIC1953-HXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHYG	-	AIC1953-HYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVHZG	-	AIC1953-HZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVI3G	-	AIC1953-I3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVI4G	-	AIC1953-I4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVI5G	-	AIC1953-I5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVI6G	-	AIC1953-I6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVI7G	-	AIC1953-I7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVI8G	-	AIC1953-I8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIAG	-	AIC1953-IAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIBG	-	AIC1953-IBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVICG	-	AIC1953-ICGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIDG	-	AIC1953-IDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIEG	-	AIC1953-IEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIFG	-	AIC1953-IFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIGG	-	AIC1953-IGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIHG	-	AIC1953-IHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIIG	-	AIC1953-IIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIJG	-	AIC1953-IJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIKG	-	AIC1953-IKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVILG	-	AIC1953-ILGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIMG	-	AIC1953-IMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVING	-	AIC1953-INGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIOG	-	AIC1953-IOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIPG	-	AIC1953-IPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIQG	-	AIC1953-IQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIRG	-	AIC1953-IRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVISG	-	AIC1953-ISGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVITG	-	AIC1953-ITGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIUG	-	AIC1953-IUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIVG	-	AIC1953-IVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIWG	-	AIC1953-IWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIXG	-	AIC1953-IXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIYG	-	AIC1953-IYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVIZG	-	AIC1953-IZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJ3G	-	AIC1953-J3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJ4G	-	AIC1953-J4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJ5G	-	AIC1953-J5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJ6G	-	AIC1953-J6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJ7G	-	AIC1953-J7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJ8G	-	AIC1953-J8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJAG	-	AIC1953-JAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJBG	-	AIC1953-JBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJCG	-	AIC1953-JCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GVJDG	-	AIC1953-JDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJEG	-	AIC1953-JEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJFG	-	AIC1953-JFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJGG	-	AIC1953-JGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJHG	-	AIC1953-JHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJIG	-	AIC1953-JIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJJG	-	AIC1953-JJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJKG	-	AIC1953-JKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJLG	-	AIC1953-JLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJMG	-	AIC1953-JMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJNG	-	AIC1953-JNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJOG	-	AIC1953-JOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJPG	-	AIC1953-JPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJQG	-	AIC1953-JQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJRG	-	AIC1953-JRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJSG	-	AIC1953-JSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJTG	-	AIC1953-JTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJUG	-	AIC1953-JUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJVG	-	AIC1953-JVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJWG	-	AIC1953-JWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJXG	-	AIC1953-JXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJYG	-	AIC1953-JYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVJZG	-	AIC1953-JZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVK3G	-	AIC1953-K3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVK4G	-	AIC1953-K4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVK5G	-	AIC1953-K5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVK6G	-	AIC1953-K6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVK7G	-	AIC1953-K7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVK8G	-	AIC1953-K8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKAG	-	AIC1953-KAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKBG	-	AIC1953-KBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKCG	-	AIC1953-KCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKDG	-	AIC1953-KDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKEG	-	AIC1953-KEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKFG	-	AIC1953-KFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKGG	-	AIC1953-KGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKHG	-	AIC1953-KHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKIG	-	AIC1953-KIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKJG	-	AIC1953-KJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKKG	-	AIC1953-KKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKLG	-	AIC1953-KLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKMG	-	AIC1953-KMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKNG	-	AIC1953-KNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKOG	-	AIC1953-KOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKPG	-	AIC1953-KPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKQG	-	AIC1953-KQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKRG	-	AIC1953-KRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKSG	-	AIC1953-KSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKTG	-	AIC1953-KTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKUG	-	AIC1953-KUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKVG	-	AIC1953-KVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKWG	-	AIC1953-KWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKXG	-	AIC1953-KXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKYG	-	AIC1953-KYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVKZG	-	AIC1953-KZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVL3G	-	AIC1953-L3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVL4G	-	AIC1953-L4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVL5G	-	AIC1953-L5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVL6G	-	AIC1953-L6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVL7G	-	AIC1953-L7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVL8G	-	AIC1953-L8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLAG	-	AIC1953-LAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLBG	-	AIC1953-LBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLCG	-	AIC1953-LCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLDG	-	AIC1953-LDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLEG	-	AIC1953-LEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLFG	-	AIC1953-LFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLGG	-	AIC1953-LGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLHG	-	AIC1953-LHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLIG	-	AIC1953-LIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GVLJG	-	AIC1953-LJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLKG	-	AIC1953-LKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLLG	-	AIC1953-LLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLMG	-	AIC1953-LMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLNG	-	AIC1953-LNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLOG	-	AIC1953-LOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLPG	-	AIC1953-LPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLQG	-	AIC1953-LQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLRG	-	AIC1953-LRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLSG	-	AIC1953-LSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLTG	-	AIC1953-LTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLUG	-	AIC1953-LUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLVG	-	AIC1953-LVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLWG	-	AIC1953-LWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLXG	-	AIC1953-LXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLYG	-	AIC1953-LYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVLZG	-	AIC1953-LZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVM3G	-	AIC1953-M3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVM4G	-	AIC1953-M4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVM5G	-	AIC1953-M5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVM6G	-	AIC1953-M6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVM7G	-	AIC1953-M7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVM8G	-	AIC1953-M8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMAG	-	AIC1953-MAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMBG	-	AIC1953-MBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMCG	-	AIC1953-MCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMDG	-	AIC1953-MDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMEG	-	AIC1953-MEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMFG	-	AIC1953-MFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMGG	-	AIC1953-MGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMHG	-	AIC1953-MHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMIG	-	AIC1953-MIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMJG	-	AIC1953-MJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMKG	-	AIC1953-MKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMLG	-	AIC1953-MLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMMG	-	AIC1953-MMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMNG	-	AIC1953-MNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMOG	-	AIC1953-MOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMPG	-	AIC1953-MPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMQG	-	AIC1953-MQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMRG	-	AIC1953-MRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMSG	-	AIC1953-MSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMTG	-	AIC1953-MTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMUG	-	AIC1953-MUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMVG	-	AIC1953-MVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMWG	-	AIC1953-MWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMXG	-	AIC1953-MXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMYG	-	AIC1953-MYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVMZG	-	AIC1953-MZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVN3G	-	AIC1953-N3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVN4G	-	AIC1953-N4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVN5G	-	AIC1953-N5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVN6G	-	AIC1953-N6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVN7G	-	AIC1953-N7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVN8G	-	AIC1953-N8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNAG	-	AIC1953-NAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNBG	-	AIC1953-NBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNCG	-	AIC1953-NCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNDG	-	AIC1953-NDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNEG	-	AIC1953-NEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNFG	-	AIC1953-NFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNGG	-	AIC1953-NGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNHG	-	AIC1953-NHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNIG	-	AIC1953-NIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNJG	-	AIC1953-NJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNKG	-	AIC1953-NKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNLG	-	AIC1953-NLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNMG	-	AIC1953-NMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNNG	-	AIC1953-NNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNOG	-	AIC1953-NOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GVNPG	-	AIC1953-NPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNQG	-	AIC1953-NQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNRG	-	AIC1953-NRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNSG	-	AIC1953-NSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNTG	-	AIC1953-NTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNUG	-	AIC1953-NUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNVG	-	AIC1953-NVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNWG	-	AIC1953-NWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNXG	-	AIC1953-NXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNYG	-	AIC1953-NYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVNZG	-	AIC1953-NZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVO3G	-	AIC1953-O3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVO4G	-	AIC1953-O4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVO5G	-	AIC1953-O5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVO6G	-	AIC1953-O6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVO7G	-	AIC1953-O7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVO8G	-	AIC1953-O8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOAG	-	AIC1953-OAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOBG	-	AIC1953-OBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOCG	-	AIC1953-OCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVODG	-	AIC1953-ODGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOEG	-	AIC1953-OEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOFG	-	AIC1953-OFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOGG	-	AIC1953-OGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOHG	-	AIC1953-OHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOIG	-	AIC1953-OIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOJG	-	AIC1953-OJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOKG	-	AIC1953-OKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOLG	-	AIC1953-OLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOMG	-	AIC1953-OMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVONG	-	AIC1953-ONGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOOG	-	AIC1953-OOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOPG	-	AIC1953-OPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOQG	-	AIC1953-OQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVORG	-	AIC1953-ORGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOSG	-	AIC1953-OSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOTG	-	AIC1953-OTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOUG	-	AIC1953-OUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOVG	-	AIC1953-OVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOWG	-	AIC1953-OWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOXG	-	AIC1953-OXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOYG	-	AIC1953-OYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVOZG	-	AIC1953-OZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVP3G	-	AIC1953-P3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVP4G	-	AIC1953-P4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVP5G	-	AIC1953-P5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVP6G	-	AIC1953-P6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVP7G	-	AIC1953-P7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVP8G	-	AIC1953-P8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPAG	-	AIC1953-PAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPBG	-	AIC1953-PBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPCG	-	AIC1953-PCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPDG	-	AIC1953-PDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPEG	-	AIC1953-PEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPFG	-	AIC1953-PFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPGG	-	AIC1953-PGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPHG	-	AIC1953-PHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPIG	-	AIC1953-PIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPJG	-	AIC1953-PJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPKG	-	AIC1953-PKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPLG	-	AIC1953-PLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPMG	-	AIC1953-PMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPNG	-	AIC1953-PNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPOG	-	AIC1953-POGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPPG	-	AIC1953-PPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPQG	-	AIC1953-PQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPRG	-	AIC1953-PRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPSG	-	AIC1953-PSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPTG	-	AIC1953-PTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPUG	-	AIC1953-PUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GVPVG	-	AIC1953-PVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPWG	-	AIC1953-PWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPXG	-	AIC1953-PXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPYG	-	AIC1953-PYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVPZG	-	AIC1953-PZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQ3G	-	AIC1953-Q3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQ4G	-	AIC1953-Q4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQ5G	-	AIC1953-Q5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQ6G	-	AIC1953-Q6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQ7G	-	AIC1953-Q7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQ8G	-	AIC1953-Q8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQAG	-	AIC1953-QAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQBG	-	AIC1953-QBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQCG	-	AIC1953-QCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQDG	-	AIC1953-QDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQEG	-	AIC1953-QEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQFG	-	AIC1953-QFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQGG	-	AIC1953-QGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQHG	-	AIC1953-QHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQIG	-	AIC1953-QIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQJG	-	AIC1953-QJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQKG	-	AIC1953-QKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQLG	-	AIC1953-QLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQMG	-	AIC1953-QMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQNG	-	AIC1953-QNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQOG	-	AIC1953-QOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQPG	-	AIC1953-QPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQQG	-	AIC1953-QQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQRG	-	AIC1953-QRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQSG	-	AIC1953-QSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQTG	-	AIC1953-QTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQUG	-	AIC1953-QUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQVG	-	AIC1953-QVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQWG	-	AIC1953-QWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQXG	-	AIC1953-QXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQYG	-	AIC1953-QYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVQZG	-	AIC1953-QZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVR3G	-	AIC1953-R3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVR4G	-	AIC1953-R4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVR5G	-	AIC1953-R5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVR6G	-	AIC1953-R6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVR7G	-	AIC1953-R7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVR8G	-	AIC1953-R8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRAG	-	AIC1953-RAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRBG	-	AIC1953-RBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRCG	-	AIC1953-RCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRDG	-	AIC1953-RDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVREG	-	AIC1953-REGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRFG	-	AIC1953-RFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRGG	-	AIC1953-RGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRHG	-	AIC1953-RHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRIG	-	AIC1953-RIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRJG	-	AIC1953-RJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRKG	-	AIC1953-RKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRLG	-	AIC1953-RLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRMG	-	AIC1953-RMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRNG	-	AIC1953-RNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVROG	-	AIC1953-ROGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRPG	-	AIC1953-RPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRQG	-	AIC1953-RQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRRG	-	AIC1953-RRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRSG	-	AIC1953-RSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRTG	-	AIC1953-RTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRUG	-	AIC1953-RUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRVG	-	AIC1953-RVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRWG	-	AIC1953-RWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRXG	-	AIC1953-RXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRYG	-	AIC1953-RYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVRZG	-	AIC1953-RZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVS3G	-	AIC1953-S3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GVS4G	-	AIC1953-S4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVS5G	-	AIC1953-S5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVS6G	-	AIC1953-S6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVS7G	-	AIC1953-S7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVS8G	-	AIC1953-S8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSAG	-	AIC1953-SAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSBG	-	AIC1953-SBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSCG	-	AIC1953-SCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSDG	-	AIC1953-SDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSEG	-	AIC1953-SEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSFG	-	AIC1953-SFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSGG	-	AIC1953-SGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSHG	-	AIC1953-SHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSIG	-	AIC1953-SIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSJG	-	AIC1953-SJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSKG	-	AIC1953-SKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSLG	-	AIC1953-SLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSMG	-	AIC1953-SMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSNG	-	AIC1953-SNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSOG	-	AIC1953-SOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSPG	-	AIC1953-SPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSQG	-	AIC1953-SQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSRG	-	AIC1953-SRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSSG	-	AIC1953-SSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSTG	-	AIC1953-STGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSUG	-	AIC1953-SUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSVG	-	AIC1953-SVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSWG	-	AIC1953-SWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSXG	-	AIC1953-SXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSYG	-	AIC1953-SYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVSZG	-	AIC1953-SZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVT3G	-	AIC1953-T3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVT4G	-	AIC1953-T4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVT5G	-	AIC1953-T5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVT6G	-	AIC1953-T6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVT7G	-	AIC1953-T7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVT8G	-	AIC1953-T8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTAG	-	AIC1953-TAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTBG	-	AIC1953-TBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTCG	-	AIC1953-TCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTDG	-	AIC1953-TDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTEG	-	AIC1953-TEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTFG	-	AIC1953-TFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTGG	-	AIC1953-TGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTHG	-	AIC1953-THGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTIG	-	AIC1953-TIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTJG	-	AIC1953-TJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTKG	-	AIC1953-TKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTLG	-	AIC1953-TLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTMG	-	AIC1953-TMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTNG	-	AIC1953-TNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTOG	-	AIC1953-TOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTPG	-	AIC1953-TPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTQG	-	AIC1953-TQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTRG	-	AIC1953-TRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTSG	-	AIC1953-TSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTTG	-	AIC1953-TTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTUG	-	AIC1953-TUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTVG	-	AIC1953-TVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTWG	-	AIC1953-TWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTXG	-	AIC1953-TXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTYG	-	AIC1953-TYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVTZG	-	AIC1953-TZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVU3G	-	AIC1953-U3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVU4G	-	AIC1953-U4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVU5G	-	AIC1953-U5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVU6G	-	AIC1953-U6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVU7G	-	AIC1953-U7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVU8G	-	AIC1953-U8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUAG	-	AIC1953-UAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GVUBG	-	AIC1953-UBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUCG	-	AIC1953-UCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUDG	-	AIC1953-UDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUEG	-	AIC1953-UEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUFG	-	AIC1953-UFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUGG	-	AIC1953-UGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUHG	-	AIC1953-UHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUIG	-	AIC1953-UIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUJG	-	AIC1953-UJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUKG	-	AIC1953-UKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVULG	-	AIC1953-ULGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUMG	-	AIC1953-UMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUNG	-	AIC1953-UNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUOG	-	AIC1953-UOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUPG	-	AIC1953-UPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUQG	-	AIC1953-UQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVURG	-	AIC1953-URGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUSG	-	AIC1953-USGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUTG	-	AIC1953-UTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUUG	-	AIC1953-UUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUVG	-	AIC1953-UVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUWG	-	AIC1953-UWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUXG	-	AIC1953-UXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUYG	-	AIC1953-UYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVUZG	-	AIC1953-UZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVV3G	-	AIC1953-V3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVV4G	-	AIC1953-V4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVV5G	-	AIC1953-V5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVV6G	-	AIC1953-V6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVV7G	-	AIC1953-V7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVV8G	-	AIC1953-V8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVAG	-	AIC1953-VAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVBG	-	AIC1953-VBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVCG	-	AIC1953-VCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVDG	-	AIC1953-VDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVEG	-	AIC1953-VEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVFG	-	AIC1953-VFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVGG	-	AIC1953-VGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVHG	-	AIC1953-VHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVIG	-	AIC1953-VIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVJG	-	AIC1953-VJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVKG	-	AIC1953-VKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVLG	-	AIC1953-VLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVMG	-	AIC1953-VMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVNG	-	AIC1953-VNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVOG	-	AIC1953-VOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVPG	-	AIC1953-VPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVQG	-	AIC1953-VQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVRG	-	AIC1953-VRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVSG	-	AIC1953-VSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVTG	-	AIC1953-VTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVUG	-	AIC1953-VUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVVG	-	AIC1953-VVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVWG	-	AIC1953-VWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVXG	-	AIC1953-VXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVYG	-	AIC1953-VYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVVZG	-	AIC1953-VZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVW3G	-	AIC1953-W3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVW4G	-	AIC1953-W4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVW5G	-	AIC1953-W5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVW6G	-	AIC1953-W6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVW7G	-	AIC1953-W7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVW8G	-	AIC1953-W8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWAG	-	AIC1953-WAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWBG	-	AIC1953-WBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWCG	-	AIC1953-WCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWDG	-	AIC1953-WDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWEG	-	AIC1953-WEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWFG	-	AIC1953-WFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWGG	-	AIC1953-WGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GVWHG	-	AIC1953-WHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWIG	-	AIC1953-WIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWJG	-	AIC1953-WJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWKG	-	AIC1953-WKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWLG	-	AIC1953-WLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWMG	-	AIC1953-WMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWNG	-	AIC1953-WNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWOG	-	AIC1953-WOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWPG	-	AIC1953-WPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWQG	-	AIC1953-WQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWRG	-	AIC1953-WRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWSG	-	AIC1953-WSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWTG	-	AIC1953-WTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWUG	-	AIC1953-WUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWVG	-	AIC1953-WVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWWG	-	AIC1953-WWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWXG	-	AIC1953-WXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWYG	-	AIC1953-WYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVWZG	-	AIC1953-WZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVX3G	-	AIC1953-X3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVX4G	-	AIC1953-X4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVX5G	-	AIC1953-X5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVX6G	-	AIC1953-X6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVX7G	-	AIC1953-X7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVX8G	-	AIC1953-X8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXAG	-	AIC1953-XAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXBG	-	AIC1953-XBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXCG	-	AIC1953-XCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXDG	-	AIC1953-XDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXEG	-	AIC1953-XEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXFG	-	AIC1953-XFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXGG	-	AIC1953-XGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXHG	-	AIC1953-XHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXIG	-	AIC1953-XIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXJG	-	AIC1953-XJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXKG	-	AIC1953-XKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXLG	-	AIC1953-XLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXMG	-	AIC1953-XMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXNG	-	AIC1953-XNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXOG	-	AIC1953-XOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXPG	-	AIC1953-XPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXQG	-	AIC1953-XQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXRG	-	AIC1953-XRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXSG	-	AIC1953-XSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXTG	-	AIC1953-XTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXUG	-	AIC1953-XUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXVG	-	AIC1953-XVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXWG	-	AIC1953-XWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXXG	-	AIC1953-XXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXYG	-	AIC1953-XYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVXZG	-	AIC1953-XZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVY3G	-	AIC1953-Y3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVY4G	-	AIC1953-Y4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVY5G	-	AIC1953-Y5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVY6G	-	AIC1953-Y6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVY7G	-	AIC1953-Y7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVY8G	-	AIC1953-Y8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYAG	-	AIC1953-YAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYBG	-	AIC1953-YBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYCG	-	AIC1953-YCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYDG	-	AIC1953-YDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYEG	-	AIC1953-YEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYFG	-	AIC1953-YFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYGG	-	AIC1953-YGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYHG	-	AIC1953-YHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYIG	-	AIC1953-YIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYJG	-	AIC1953-YJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYKG	-	AIC1953-YKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYLG	-	AIC1953-YLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYMG	-	AIC1953-YMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GVYNG	-	AIC1953-YNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYOG	-	AIC1953-YOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYPG	-	AIC1953-YPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYQG	-	AIC1953-YQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYRG	-	AIC1953-YRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYSG	-	AIC1953-YSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYTG	-	AIC1953-YTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYUG	-	AIC1953-YUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYVG	-	AIC1953-YVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYWG	-	AIC1953-YWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYXG	-	AIC1953-YXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYYG	-	AIC1953-YYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVYZG	-	AIC1953-YZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZ3G	-	AIC1953-Z3GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZ4G	-	AIC1953-Z4GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZ5G	-	AIC1953-Z5GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZ6G	-	AIC1953-Z6GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZ7G	-	AIC1953-Z7GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZ8G	-	AIC1953-Z8GG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZAG	-	AIC1953-ZAGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/0.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZBG	-	AIC1953-ZBGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/0.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZCG	-	AIC1953-ZCGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZDG	-	AIC1953-ZDGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZEG	-	AIC1953-ZEGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZFG	-	AIC1953-ZFGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZGG	-	AIC1953-ZGGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZHG	-	AIC1953-ZHGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZIG	-	AIC1953-ZIGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZJG	-	AIC1953-ZJGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZKG	-	AIC1953-ZKGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZLG	-	AIC1953-ZLGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZMG	-	AIC1953-ZMGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZNG	-	AIC1953-ZNGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZOG	-	AIC1953-ZOGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZPG	-	AIC1953-ZPGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZQG	-	AIC1953-ZQGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZRG	-	AIC1953-ZRGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZSG	-	AIC1953-ZSGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZTG	-	AIC1953-ZTGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZUG	-	AIC1953-ZUGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZVG	-	AIC1953-ZVGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZWG	-	AIC1953-ZWGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZXG	-	AIC1953-ZXGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZYG	-	AIC1953-ZYGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GVZZG	-	AIC1953-ZZGG6T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 600mA, +CE	SOT-23-6	33x5	VR19	7b	Aic
GW	-	RP152N021C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GX	-	DDZX14TS	Z-diode	Triple, 14V ±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
GX	-	RP152N022C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GY	-	DDZX15TS	Z-diode	Triple, 15V ±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
GY	-	RP152N023C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
GZ	-	RP152N024C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
H	-	AG203-63G	MMIC	Buff/amp, DC..6GHz, 20dB (900MHz, 50Ω)	SOT-363	33a1	A1	7d	Wjc
H	-	HSMS-280M	Si-diode	Quad, Schottky, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-363	33bw	-	7b	Agi
H	-	Si1029X	n/p-MOSFET	Dual, T-FET, Sw, 60V, 0.5A, 250mW, <1.4Ω(0.5A), 15/35ns	SOT-363	33	T6	7b	Six
H0	-	R1131D201A	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
H0	-	R1160D301B	LVR-IC	LDO, 3.0V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
H0	-	RN2901FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=4.7k/4.7k	FS6	35	TD4	7b	Tos
H00	-	74HC2G00DC	CMOS-Log	Dual 2-input NAND gates	SOT765-1	55	Log50	8d	Nxp
H00	-	74HC2G00DP	CMOS-Log	Dual 2-input NAND gates	SOT505-2	47	Log50	8d	Nxp
H00B	-	R1173D001B	LVR-IC	LDO, Adjustable, 1A, +CE	HSON-6	vrm	VR5	7ea	Ric
H00D	-	R1173D001D	LVR-IC	LDO, Adjustable, 1A, +CE, CL	HSON-6	vrm	VR5	7ea	Ric
H01B	-	R1173D181B5	LVR-IC	LDO, 1.85V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H01C	-	R1234D001C	DC-DC-IC	PWM step-down, adjustable, 500kHz	SON-8	ej	-	8c	Ric
H01D	-	R1173D181D5	LVR-IC	LDO, 1.85V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H01D	-	R1234D001D	DC-DC-IC	PWM step-down, adjustable, 800kHz	SON-8	ej	-	8c	Ric
H02	-	74HC2G02DC	CMOS-Log	Dual 2-input NOR gates	SOT765-1	55	Log53	8d	Nxp
H02	-	74HC2G02DP	CMOS-Log	Dual 2-input NOR gates	SOT505-2	47	Log53	8d	Nxp
H02B	-	R1173D281B5	LVR-IC	LDO, 2.85V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H02D	-	R1173D281D5	LVR-IC	LDO, 2.85V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H030	-	R1501S030B	LVR-IC	LDO, 3.0V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H031	-	R1501S031B	LVR-IC	LDO, 3.1V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H032	-	R1501S032B	LVR-IC	LDO, 3.2V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H033	-	R1501S033B	LVR-IC	LDO, 3.3V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H034	-	R1501S034B	LVR-IC	LDO, 3.4V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H035	-	R1501S035B	LVR-IC	LDO, 3.5V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H036	-	R1501S036B	LVR-IC	LDO, 3.6V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H037	-	R1501S037B	LVR-IC	LDO, 3.7V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H038	-	R1501S038B	LVR-IC	LDO, 3.8V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H039	-	R1501S039B	LVR-IC	LDO, 3.9V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H04	-	74HC3G04DC	CMOS-Log	Triple inverters	SOT765-1	55	Log56	8d	Nxp
H04	-	74HC3G04DP	CMOS-Log	Triple inverters	SOT505-2	47	Log56	8d	Nxp
H040	-	R1501S040B	LVR-IC	LDO, 4.0V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H041	-	R1501S041B	LVR-IC	LDO, 4.1V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H042	-	R1501S042B	LVR-IC	LDO, 4.2V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H043	-	R1501S043B	LVR-IC	LDO, 4.3V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H044	-	R1501S044B	LVR-IC	LDO, 4.4V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H045	-	R1501S045B	LVR-IC	LDO, 4.5V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H046	-	R1501S046B	LVR-IC	LDO, 4.6V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H047	-	R1501S047B	LVR-IC	LDO, 4.7V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H048	-	R1501S048B	LVR-IC	LDO, 4.8V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H049	-	R1501S049B	LVR-IC	LDO, 4.9V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H050	-	R1501S050B	LVR-IC	LDO, 4.0V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H051	-	R1501S051B	LVR-IC	LDO, 5.1V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H052	-	R1501S052B	LVR-IC	LDO, 5.2V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H053	-	R1501S053B	LVR-IC	LDO, 5.3V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H054	-	R1501S054B	LVR-IC	LDO, 5.4V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H055	-	R1501S055B	LVR-IC	LDO, 5.5V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H056	-	R1501S056B	LVR-IC	LDO, 5.6V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H057	-	R1501S057B	LVR-IC	LDO, 5.7V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H058	-	R1501S058B	LVR-IC	LDO, 5.8V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H059	-	R1501S059B	LVR-IC	LDO, 5.9V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H06	-	74HC3G06DC	CMOS-Log	Triple inverters (ODO)	SOT765-1	55	Log72	8d	Nxp
H06	-	74HC3G06DP	CMOS-Log	Triple inverters (ODO)	SOT505-2	47	Log72	8d	Nxp
H060	-	R1501S060B	LVR-IC	LDO, 6.0V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H061	-	R1501S061B	LVR-IC	LDO, 6.1V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H062	-	R1501S062B	LVR-IC	LDO, 6.2V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H063	-	R1501S063B	LVR-IC	LDO, 6.3V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H064	-	R1501S064B	LVR-IC	LDO, 6.4V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H065	-	R1501S065B	LVR-IC	LDO, 6.5V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H066	-	R1501S066B	LVR-IC	LDO, 6.6V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H067	-	R1501S067B	LVR-IC	LDO, 6.7V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H068	-	R1501S068B	LVR-IC	LDO, 6.8V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H069	-	R1501S069B	LVR-IC	LDO, 6.9V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H07	-	74HC3G07DC	CMOS-Log	Triple noninverting buffers/drivers (ODO)	SOT765-1	55	Log73	8d	Nxp
H07	-	74HC3G07DP	CMOS-Log	Triple noninverting buffers/drivers (ODO)	SOT505-2	47	Log73	8d	Nxp
H070	-	R1501S070B	LVR-IC	LDO, 7.0V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H071	-	R1501S071B	LVR-IC	LDO, 7.1V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H072	-	R1501S072B	LVR-IC	LDO, 7.2V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H073	-	R1501S073B	LVR-IC	LDO, 7.3V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H074	-	R1501S074B	LVR-IC	LDO, 7.4V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H075	-	R1501S075B	LVR-IC	LDO, 7.5V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H076	-	R1501S076B	LVR-IC	LDO, 7.6V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H077	-	R1501S077B	LVR-IC	LDO, 7.7V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H078	-	R1501S078B	LVR-IC	LDO, 7.8V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H079	-	R1501S079B	LVR-IC	LDO, 7.9V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H08	-	74HC2G08DC	CMOS-Log	Dual 2-input AND gates	SOT765-1	55	Log51	8d	Nxp
H08	-	74HC2G08DP	CMOS-Log	Dual 2-input AND gates	SOT505-2	47	Log51	8d	Nxp
H08	-	SN74AUP2G08DCU	CMOS-Log	Dual 2-input AND gates	VSSOP-8	55	Log51	8i	Ti
H080	-	R1501S080B	LVR-IC	LDO, 8.0V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H081	-	R1501S081B	LVR-IC	LDO, 8.1V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H082	-	R1501S082B	LVR-IC	LDO, 8.2V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H083	-	R1501S083B	LVR-IC	LDO, 8.3V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H084	-	R1501S084B	LVR-IC	LDO, 8.4V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H085	-	R1501S085B	LVR-IC	LDO, 8.5V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H086	-	R1501S086B	LVR-IC	LDO, 8.6V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H087	-	R1501S087B	LVR-IC	LDO, 8.7V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H088	-	R1501S088B	LVR-IC	LDO, 8.8V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H089	-	R1501S089B	LVR-IC	LDO, 8.9V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H08B	-	R1173D081B	LVR-IC	LDO, 0.8V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H08D	-	R1173D081D	LVR-IC	LDO, 0.8V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H090	-	R1501S090B	LVR-IC	LDO, 9.0V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H091	-	R1501S091B	LVR-IC	LDO, 9.1V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H092	-	R1501S092B	LVR-IC	LDO, 9.2V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H093	-	R1501S093B	LVR-IC	LDO, 9.3V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H094	-	R1501S094B	LVR-IC	LDO, 9.4V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H095	-	R1501S095B	LVR-IC	LDO, 9.5V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H096	-	R1501S096B	LVR-IC	LDO, 9.6V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H097	-	R1501S097B	LVR-IC	LDO, 9.7V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H098	-	R1501S098B	LVR-IC	LDO, 9.8V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H099	-	R1501S099B	LVR-IC	LDO, 9.9V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H09B	-	R1173D091B	LVR-IC	LDO, 0.9V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H09D	-	R1173D091D	LVR-IC	LDO, 0.9V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H1	-	R1131D211A	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
H1	-	R1160D311B	LVR-IC	LDO, 3.1V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
H1	-	RN2902FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=10k/10k	FS6	35	TD4	7b	Tos
H10	-	IMH10A	Si-npn-Digi	Dual, 50V, 100mA, R1/R2=2.2k/47k	SOT-23-6	33	TD3	7b	Rhm
H100	-	R1501S100B	LVR-IC	LDO, 10.0V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H101	-	R1501S101B	LVR-IC	LDO, 10.1V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H102	-	R1501S102B	LVR-IC	LDO, 10.2V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H103	-	R1501S103B	LVR-IC	LDO, 10.3V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H104	-	R1501S104B	LVR-IC	LDO, 10.4V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H105	-	R1501S105B	LVR-IC	LDO, 10.5V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H106	-	R1501S106B	LVR-IC	LDO, 10.6V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H107	-	R1501S107B	LVR-IC	LDO, 10.7V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H108	-	R1501S108B	LVR-IC	LDO, 10.8V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H109	-	R1501S109B	LVR-IC	LDO, 10.9V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H10B	-	R1173D101B	LVR-IC	LDO, 1.0V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H10D	-	R1173D101D	LVR-IC	LDO, 1.0V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H11	-	IMH11A	Si-npn-Digi	Dual, 50V, 100mA, R1/R2=10k/10k	SOT-23-6	33	TD3	7b	Rhm
H110	-	R1501S110B	LVR-IC	LDO, 11.0V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H111	-	R1501S111B	LVR-IC	LDO, 11.1V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H112	-	R1501S112B	LVR-IC	LDO, 11.2V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H113	-	R1501S113B	LVR-IC	LDO, 11.3V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H114	-	R1501S114B	LVR-IC	LDO, 11.4V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H115	-	R1501S115B	LVR-IC	LDO, 11.5V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H116	-	R1501S116B	LVR-IC	LDO, 11.6V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H117	-	R1501S117B	LVR-IC	LDO, 11.7V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H118	-	R1501S118B	LVR-IC	LDO, 11.8V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H119	-	R1501S119B	LVR-IC	LDO, 11.9V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H11B	-	R1173D111B	LVR-IC	LDO, 1.1V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H11D	-	R1173D111D	LVR-IC	LDO, 1.1V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H120	-	R1501S120B	LVR-IC	LDO, 12.0V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H125	-	R1501S125B	LVR-IC	LDO, 12.5V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H12A	-	R1234D121A	DC-DC-IC	PWM step-down, 1.2V±2%, 500kHz	SON-8	ej	-	8c	Ric
H12B	-	R1173D121B	LVR-IC	LDO, 1.2V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H12B	-	R1234D121B	DC-DC-IC	PWM step-down, 1.2V±2%, 800kHz	SON-8	ej	-	8c	Ric
H12D	-	R1173D121D	LVR-IC	LDO, 1.2V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H130	-	R1501S130B	LVR-IC	LDO, 13.0V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H135	-	R1501S135B	LVR-IC	LDO, 13.5V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H13A	-	R1234D131A	DC-DC-IC	PWM step-down, 1.3V±2%, 500kHz	SON-8	ej	-	8c	Ric
H13B	-	R1173D131B	LVR-IC	LDO, 1.3V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H13B	-	R1234D131B	DC-DC-IC	PWM step-down, 1.3V±2%, 800kHz	SON-8	ej	-	8c	Ric
H13D	-	R1173D131D	LVR-IC	LDO, 1.3V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H14	-	74HC2G14GV	CMOS-Log	Dual Schmitt-trigger inverter buffers	SOT-363	33	Log34	7b	Nxp
H14	-	74HC3G14DC	CMOS-Log	Triple Schmitt-trigger inverters	SOT765-1	55	Log57	8d	Nxp
H14	-	74HC3G14DP	CMOS-Log	Triple Schmitt-trigger inverters	SOT505-2	47	Log57	8d	Nxp
H14	-	74HCT2G14GV	CMOS-Log	Dual Schmitt-trigger inverter buffers	SOT-363	33	Log34	7b	Nxp
H140	-	R1501S140B	LVR-IC	LDO, 14.0V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H145	-	R1501S145B	LVR-IC	LDO, 14.5V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H14A	-	R1234D141A	DC-DC-IC	PWM step-down, 1.4V±2%, 500kHz	SON-8	ej	-	8c	Ric
H14B	-	R1173D141B	LVR-IC	LDO, 1.4V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H14B	-	R1234D141B	DC-DC-IC	PWM step-down, 1.4V±2%, 800kHz	SON-8	ej	-	8c	Ric
H14D	-	R1173D141D	LVR-IC	LDO, 1.4V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H15	-	IMH15A	Si-npn-Digi	Dual, 50V, 100mA, R1=47k	SOT-23-6	33	TD3	7b	Rhm
H150	-	R1501S150B	LVR-IC	LDO, 15.0V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H155	-	R1501S155B	LVR-IC	LDO, 15.5V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H15A	-	R1234D151A	DC-DC-IC	PWM step-down, 1.5V±2%, 500kHz	SON-8	ej	-	8c	Ric
H15B	-	R1162D151B	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H15B	-	R1173D151B	LVR-IC	LDO, 1.5V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H15B	-	R1234D151B	DC-DC-IC	PWM step-down, 1.5V±2%, 800kHz	SON-8	ej	-	8c	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H15D	-	R1162D151D	LVR-IC	LDO, 1.5V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H15D	-	R1173D151D	LVR-IC	LDO, 1.5V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H160	-	R1501S160B	LVR-IC	LDO, 16.0V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H165	-	R1501S165B	LVR-IC	LDO, 16.5V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H16A	-	R1234D161A	DC-DC-IC	PWM step-down, 1.6V±2%, 500kHz	SON-8	ej	-	8c	Ric
H16B	-	R1162D161B	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H16B	-	R1173D161B	LVR-IC	LDO, 1.6V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H16B	-	R1234D161B	DC-DC-IC	PWM step-down, 1.6V±2%, 800kHz	SON-8	ej	-	8c	Ric
H16D	-	R1162D161D	LVR-IC	LDO, 1.6V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H16D	-	R1173D161D	LVR-IC	LDO, 1.6V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H170	-	R1501S170B	LVR-IC	LDO, 17.0V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H175	-	R1501S175B	LVR-IC	LDO, 17.5V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H17A	-	R1234D171A	DC-DC-IC	PWM step-down, 1.7V±2%, 500kHz	SON-8	ej	-	8c	Ric
H17B	-	R1162D171B	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H17B	-	R1173D171B	LVR-IC	LDO, 1.7V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H17B	-	R1234D171B	DC-DC-IC	PWM step-down, 1.7V±2%, 800kHz	SON-8	ej	-	8c	Ric
H17D	-	R1162D171D	LVR-IC	LDO, 1.7V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H17D	-	R1173D171D	LVR-IC	LDO, 1.7V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H180	-	R1501S180B	LVR-IC	LDO, 18.0V±2%, 1A, +CE	HSOP-6J	x3	VR4	7h	Ric
H18A	-	R1234D181A	DC-DC-IC	PWM step-down, 1.8V±2%, 500kHz	SON-8	ej	-	8c	Ric
H18B	-	R1162D181B	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H18B	-	R1173D181B	LVR-IC	LDO, 1.8V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H18B	-	R1234D181B	DC-DC-IC	PWM step-down, 1.8V±2%, 800kHz	SON-8	ej	-	8c	Ric
H18D	-	R1162D181D	LVR-IC	LDO, 1.8V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H18D	-	R1173D181D	LVR-IC	LDO, 1.8V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H19A	-	R1234D191A	DC-DC-IC	PWM step-down, 1.9V±2%, 500kHz	SON-8	ej	-	8c	Ric
H19B	-	R1162D191B	LVR-IC	LDO, 1.9V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H19B	-	R1173D191B	LVR-IC	LDO, 1.9V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H19B	-	R1234D191B	DC-DC-IC	PWM step-down, 1.9V±2%, 800kHz	SON-8	ej	-	8c	Ric
H19D	-	R1162D191D	LVR-IC	LDO, 1.9V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H19D	-	R1173D191D	LVR-IC	LDO, 1.9V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H2	-	R1131D221A	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
H2	-	R1160D321B	LVR-IC	LDO, 3.2V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
H2	-	RN2903FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=22k/22k	FS6	35	TD4	7b	Tos
H20A	-	R1234D201A	DC-DC-IC	PWM step-down, 2V±2%, 500kHz	SON-8	ej	-	8c	Ric
H20B	-	R1162D201B	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H20B	-	R1173D201B	LVR-IC	LDO, 2.0V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H20B	-	R1234D201B	DC-DC-IC	PWM step-down, 2V±2%, 800kHz	SON-8	ej	-	8c	Ric
H20D	-	R1162D201D	LVR-IC	LDO, 2.0V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H20D	-	R1173D201D	LVR-IC	LDO, 2.0V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H21A	-	R1234D211A	DC-DC-IC	PWM step-down, 2.1V±2%, 500kHz	SON-8	ej	-	8c	Ric
H21B	-	R1162D211B	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H21B	-	R1173D211B	LVR-IC	LDO, 2.1V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H21B	-	R1234D211B	DC-DC-IC	PWM step-down, 2.1V±2%, 800kHz	SON-8	ej	-	8c	Ric
H21D	-	R1162D211D	LVR-IC	LDO, 2.1V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H21D	-	R1173D211D	LVR-IC	LDO, 2.1V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H22A	-	R1234D221A	DC-DC-IC	PWM step-down, 2.2V±2%, 500kHz	SON-8	ej	-	8c	Ric
H22B	-	R1162D221B	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H22B	-	R1173D221B	LVR-IC	LDO, 2.2V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H22B	-	R1234D221B	DC-DC-IC	PWM step-down, 2.2V±2%, 800kHz	SON-8	ej	-	8c	Ric
H22D	-	R1162D221D	LVR-IC	LDO, 2.2V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H22D	-	R1173D221D	LVR-IC	LDO, 2.2V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H23A	-	R1234D231A	DC-DC-IC	PWM step-down, 2.3V±2%, 500kHz	SON-8	ej	-	8c	Ric
H23B	-	R1162D231B	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H23B	-	R1173D231B	LVR-IC	LDO, 2.3V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H23B	-	R1234D231B	DC-DC-IC	PWM step-down, 2.3V±2%, 800kHz	SON-8	ej	-	8c	Ric
H23D	-	R1162D231D	LVR-IC	LDO, 2.3V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H23D	-	R1173D231D	LVR-IC	LDO, 2.3V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H24A	-	R1234D241A	DC-DC-IC	PWM step-down, 2.4V±2%, 500kHz	SON-8	ej	-	8c	Ric
H24B	-	R1162D241B	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H24B	-	R1173D241B	LVR-IC	LDO, 2.4V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H24B	-	R1234D241B	DC-DC-IC	PWM step-down, 2.4V±2%, 800kHz	SON-8	ej	-	8c	Ric
H24D	-	R1162D241D	LVR-IC	LDO, 2.4V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H24D	-	R1173D241D	LVR-IC	LDO, 2.4V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H25	-	74HC2G125DC	CMOS-Log	Dual bus buffer with 3-state output	SOT765-1	55	Log54	8d	Nxp
H25	-	74HC2G125DP	CMOS-Log	Dual bus buffer with 3-state output	SOT505-2	47	Log54	8d	Nxp
H25	-	SN74AUP2G125DCT	CMOS-Log	Dual bus buffer with 3-state output	SSOP-8	47	Log54	8j	Ti
H25A	-	R1234D251A	DC-DC-IC	PWM step-down, 2.5V±2%, 500kHz	SON-8	ej	-	8c	Ric
H25B	-	R1162D251B	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H25B	-	R1173D251B	LVR-IC	LDO, 2.5V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H25B	-	R1234D251B	DC-DC-IC	PWM step-down, 2.5V±2%, 800kHz	SON-8	ej	-	8c	Ric
H25D	-	R1162D251D	LVR-IC	LDO, 2.5V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H25D	-	R1173D251D	LVR-IC	LDO, 2.5V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H26	-	74HC2G126DC	CMOS-Log	Dual bus buffer with 3-state output	SOT765-1	55	Log55	8d	Nxp
H26	-	74HC2G126DP	CMOS-Log	Dual bus buffer with 3-state output	SOT505-2	47	Log55	8d	Nxp
H26A	-	R1234D261A	DC-DC-IC	PWM step-down, 2.6V±2%, 500kHz	SON-8	ej	-	8c	Ric
H26B	-	R1162D261B	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H26B	-	R1173D261B	LVR-IC	LDO, 2.6V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H26B	-	R1234D261B	DC-DC-IC	PWM step-down, 2.6V±2%, 800kHz	SON-8	ej	-	8c	Ric
H26D	-	R1162D261D	LVR-IC	LDO, 2.6V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H26D	-	R1173D261D	LVR-IC	LDO, 2.6V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H27A	-	R1234D271A	DC-DC-IC	PWM step-down, 2.7V±2%, 500kHz	SON-8	ej	-	8c	Ric
H27B	-	R1162D271B	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H27B	-	R1173D271B	LVR-IC	LDO, 2.7V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H27B	-	R1234D271B	DC-DC-IC	PWM step-down, 2.7V±2%, 800kHz	SON-8	ej	-	8c	Ric
H27D	-	R1162D271D	LVR-IC	LDO, 2.7V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H27D	-	R1173D271D	LVR-IC	LDO, 2.7V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H28A	-	R1234D281A	DC-DC-IC	PWM step-down, 2.8V±2%, 500kHz	SON-8	ej	-	8c	Ric
H28B	-	R1162D281B	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H28B	-	R1173D281B	LVR-IC	LDO, 2.8V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H28B	-	R1234D281B	DC-DC-IC	PWM step-down, 2.8V±2%, 800kHz	SON-8	ej	-	8c	Ric
H28D	-	R1162D281D	LVR-IC	LDO, 2.8V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H28D	-	R1173D281D	LVR-IC	LDO, 2.8V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H29A	-	R1234D291A	DC-DC-IC	PWM step-down, 2.9V±2%, 500kHz	SON-8	ej	-	8c	Ric
H29B	-	R1162D291B	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H29B	-	R1173D291B	LVR-IC	LDO, 2.9V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H29B	-	R1234D291B	DC-DC-IC	PWM step-down, 2.9V±2%, 800kHz	SON-8	ej	-	8c	Ric
H29D	-	R1162D291D	LVR-IC	LDO, 2.9V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H29D	-	R1173D291D	LVR-IC	LDO, 2.9V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H3	-	R1131D231A	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
H3	-	R1160D331B	LVR-IC	LDO, 3.3V±2%, 200mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
H3	-	RN2904FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=47k/47k	FS6	35	TD4	7b	Tos
H30A	-	R1234D301A	DC-DC-IC	PWM step-down, 3V±2%, 500kHz	SON-8	ej	-	8c	Ric
H30B	-	R1162D301B	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H30B	-	R1173D301B	LVR-IC	LDO, 3.0V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H30B	-	R1234D301B	DC-DC-IC	PWM step-down, 3V±2%, 800kHz	SON-8	ej	-	8c	Ric
H30D	-	R1162D301D	LVR-IC	LDO, 3.0V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H30D	-	R1173D301D	LVR-IC	LDO, 3.0V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H31A	-	R1234D311A	DC-DC-IC	PWM step-down, 3.1V±2%, 500kHz	SON-8	ej	-	8c	Ric
H31B	-	R1162D311B	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H31B	-	R1173D311B	LVR-IC	LDO, 3.1V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H31B	-	R1234D311B	DC-DC-IC	PWM step-down, 3.1V±2%, 800kHz	SON-8	ej	-	8c	Ric
H31D	-	R1162D311D	LVR-IC	LDO, 3.1V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H31D	-	R1173D311D	LVR-IC	LDO, 3.1V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H32	-	74HC2G32DC	CMOS-Log	Dual 2-input OR gates	SOT765-1	55	Log52	8d	Nxp
H32	-	74HC2G32DP	CMOS-Log	Dual 2-input OR gates	SOT505-2	47	Log52	8d	Nxp
H32A	-	R1234D321A	DC-DC-IC	PWM step-down, 3.2V±2%, 500kHz	SON-8	ej	-	8c	Ric
H32B	-	R1162D321B	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H32B	-	R1173D321B	LVR-IC	LDO, 3.2V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H32B	-	R1234D321B	DC-DC-IC	PWM step-down, 3.2V±2%, 800kHz	SON-8	ej	-	8c	Ric
H32D	-	R1162D321D	LVR-IC	LDO, 3.2V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H32D	-	R1173D321D	LVR-IC	LDO, 3.2V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H33A	-	R1234D331A	DC-DC-IC	PWM step-down, 3.3V±2%, 500kHz	SON-8	ej	-	8c	Ric
H33B	-	R1162D331B	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H33B	-	R1173D331B	LVR-IC	LDO, 3.3V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H33B	-	R1234D331B	DC-DC-IC	PWM step-down, 3.3V±2%, 800kHz	SON-8	ej	-	8c	Ric
H33D	-	R1162D331D	LVR-IC	LDO, 3.3V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H33D	-	R1173D331D	LVR-IC	LDO, 3.3V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H34	-	74HC3G34DP	CMOS-Log	Triple non-inverter buffers	SOT505-2	47	Log69	8d	Nxp
H34B	-	R1162D341B	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H34B	-	R1173D341B	LVR-IC	LDO, 3.4V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H34D	-	R1162D341D	LVR-IC	LDO, 3.4V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H34D	-	R1173D341D	LVR-IC	LDO, 3.4V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H35B	-	R1162D351B	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H35B	-	R1173D351B	LVR-IC	LDO, 3.5V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H35D	-	R1162D351D	LVR-IC	LDO, 3.5V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H35D	-	R1173D351D	LVR-IC	LDO, 3.5V±2%, 1A, +CE, CL	HSON-6	vrn	VR4	7ea	Ric
H36B	-	R1162D361B	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H36B	-	R1173D361B	LVR-IC	LDO, 3.6V±2%, 1A, +CE	HSON-6	vrn	VR4	7ea	Ric
H36D	-	R1162D361D	LVR-IC	LDO, 3.6V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H36D	-	R1173D361D	LVR-IC	LDO, 3.6V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H37B	-	R1162D371B	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H37B	-	R1173D371B	LVR-IC	LDO, 3.7V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H37D	-	R1162D371D	LVR-IC	LDO, 3.7V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H37D	-	R1173D371D	LVR-IC	LDO, 3.7V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H38B	-	R1162D381B	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H38B	-	R1173D381B	LVR-IC	LDO, 3.8V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H38D	-	R1162D381D	LVR-IC	LDO, 3.8V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H38D	-	R1173D381D	LVR-IC	LDO, 3.8V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H39B	-	R1162D391B	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H39B	-	R1173D391B	LVR-IC	LDO, 3.9V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H39D	-	R1162D391D	LVR-IC	LDO, 3.9V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H39D	-	R1173D391D	LVR-IC	LDO, 3.9V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H4	-	R1131D241A	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
H4	-	RN2905FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=2.2k/47k	FS6	35	TD4	7b	Tos
H40B	-	R1162D401B	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H40B	-	R1173D401B	LVR-IC	LDO, 4.0V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H40D	-	R1162D401D	LVR-IC	LDO, 4.0V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H40D	-	R1173D401D	LVR-IC	LDO, 4.0V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H41B	-	R1162D181B5	LVR-IC	LDO, 1.85V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H41B	-	R1173D411B	LVR-IC	LDO, 4.1V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H41D	-	R1162D181D5	LVR-IC	LDO, 1.85V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H41D	-	R1173D411D	LVR-IC	LDO, 4.1V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H42B	-	R1162D281B5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H42B	-	R1173D421B	LVR-IC	LDO, 4.2V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H42D	-	R1162D281D5	LVR-IC	LDO, 2.85V±2%, 350mA, +CE, CL, AE(mode)	SON1612-6	vrh	VR10	7e	Ric
H42D	-	R1173D421D	LVR-IC	LDO, 4.2V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H43B	-	R1173D431B	LVR-IC	LDO, 4.3V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H43D	-	R1173D431D	LVR-IC	LDO, 4.3V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H44B	-	R1173D441B	LVR-IC	LDO, 4.4V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H44D	-	R1173D441D	LVR-IC	LDO, 4.4V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H45B	-	R1173D451B	LVR-IC	LDO, 4.5V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H45D	-	R1173D451D	LVR-IC	LDO, 4.5V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H46B	-	R1173D461B	LVR-IC	LDO, 4.6V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H46D	-	R1173D461D	LVR-IC	LDO, 4.6V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H47B	-	R1173D471B	LVR-IC	LDO, 4.7V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H47D	-	R1173D471D	LVR-IC	LDO, 4.7V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H48B	-	R1173D481B	LVR-IC	LDO, 4.8V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H48D	-	R1173D481D	LVR-IC	LDO, 4.8V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H49B	-	R1173D491B	LVR-IC	LDO, 4.9V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H49D	-	R1173D491D	LVR-IC	LDO, 4.9V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H5	-	MBD770DW	Si-diode	Dual, Schottky, UHF/VHF-Det, 70V, 120mW, <1pF	SOT-363	33de	-	7b	Ons
H5	-	R1131D251A	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
H5	-	RN2906FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=4.7k/47k	FS6	35	TD4	7b	Tos
H50B	-	R1173D501B	LVR-IC	LDO, 5.0V±2%, 1A, +CE	HSON-6	vm	VR4	7ea	Ric
H50D	-	R1173D501D	LVR-IC	LDO, 5.0V±2%, 1A, +CE, CL	HSON-6	vm	VR4	7ea	Ric
H550	-	HMC550	MMIC	GaAs, SPST failsafe switch, DC-6GHz	SOT-26	33ld	SW1	7b	Htt
H6	-	R1131D261A	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
H6	-	RN2907FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=10k/47k	FS6	35	TD4	7b	Tos
H66	-	74HC2G66DP	CMOS-Log	2-channel analog switch	SOT505-2	47	Log68	8d	Nxp
H7	-	R1131D271A	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
H7	-	RN2908FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=22k/47k	FS6	35	TD4	7b	Tos
H74	-	SN74AUP1G74DCT	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	SSOP-8	47	Log59	8j	Ti
H7824	-	BH7824FVM	Lin-IC	AF PA, BTL, 2.4..5.5V, 500mW(5V/8Ω), shutdown	SOP-8	47	AFP12	8a	Rhm
H7826	-	BH7826FVM	Lin-IC	AF PA, BTL, 2.6..5.5V, 500mW(5V/8Ω), shutdown	SOP-8	47	AFP3	8a	Rhm
H8	-	R1131D281A	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
H8	-	RN2909FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=47k/22k	FS6	35	TD4	7b	Tos
H86	-	74HC2G86DC	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	SOT765-1	55	Log65	8d	Nxp
H86	-	74HC2G86DP	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	SOT505-2	47	Log65	8d	Nxp
H9	-	IMH9A	Si-npn-Digi	Dual, 50V, 100mA, R1/R2=10k/47k	SOT-23-6	33	TD3	7b	Rhm
H9	-	R1131D291A	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
H9	-	RN2910FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=4.7k	FS6	35	TD4	7b	Tos
H97	-	SN74AUP1G97DBV	CMOS-Log	Configurable multiple-function gate	SOT-23-6	33	Log41	7d	Ti
H98	-	SN74AUP1G98DBV	CMOS-Log	Configurable multiple-function gate	SOT-23-6	33	Log43	7d	Ti
H99	-	SN74AUP1G99DCT	CMOS-Log	Ultra-configurable multiple function gate with 3-state output	SSOP-8	47	Log84	8j	Ti
H99	-	SN74AUP1G99DCU	CMOS-Log	Ultra-configurable multiple function gate with 3-state output	VSSOP-8	55	Log84	8i	Ti
HA	-	µPA601T	Si-pnp	Dual, 60V, 100mA, 180MHz	SOT-23-6	33	T1a	7b	Nec
HA	-	RP152N025C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HB	-	RP152N026C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HC	-	RP152N027C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HD	-	RP152N028C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HE	-	RP152N029C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HF	-	RN2911FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=10k	FS6	35	TD4	7b	Tos
HF	-	RP152N030C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HG	-	RP152N031C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HH	-	HSMS-282M	Si-diode	Quad, Schottky, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-363	33bw	-	7b	Agi
HH	-	RP152N032C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HJ	-	RP152N033C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HK	-	74HC2G14GW	CMOS-Log	Dual Schmitt-trigger inverter buffers	SOT-363	33	Log34	7b	Nxp
HK	-	74HCT2G14GW	CMOS-Log	Dual Schmitt-trigger inverter buffers	SOT-363	33	Log34	7b	Nxp
HK	-	RP152N034C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HL	-	RP152N035C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HM	-	RP152N036C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HN	-	RP152N037C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HN26	-	SN74AUP2G126DCU	CMOS-Log	Bus buffer gate with 3-state output	SSOP-8	47	Log13	8j	Ti
HP	-	RP152N038C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HP	-	SN74AUP1G97DCK	CMOS-Log	Configurable multiple-function gate	SC-70-6	33	Log41	7d	Ti
HP	-	SN74AUP1G97DRL	CMOS-Log	Configurable multiple-function gate	SOT-553-6	35	Log41	7d	Ti
HQ	-	RP152N039C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HR	-	RP152N040C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HR	-	SN74AUP1G98DCK	CMOS-Log	Configurable multiple-function gate	SC-70-6	33	Log43	7d	Ti
HR	-	SN74AUP1G98DRL	CMOS-Log	Configurable multiple-function gate	SOT-553-6	35	Log43	7d	Ti
HS	-	RP152N041C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HS	-	SN74AUP1G74DCU	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	VSSOP-8	55	Log59	8i	Ti
HT	-	RP152N042C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HU	-	RP152N043C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HU4	-	74HC3GU04DC	CMOS-Log	Triple inverters	SOT765-1	55	Log56	8d	Nxp
HV	-	RP152N044C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HW	-	RP152N045C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HX	-	RP152N046C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HX090	-	VRH0902LN	LVR-IC	LDO, 0.9V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX095	-	VRH0952LN	LVR-IC	LDO, 0.95V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX100	-	VRH1002LN	LVR-IC	LDO, 1.0V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX105	-	VRH1052LN	LVR-IC	LDO, 1.05V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX110	-	VRH1102LN	LVR-IC	LDO, 1.1V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX115	-	VRH1152LN	LVR-IC	LDO, 1.15V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX120	-	VRH1202LN	LVR-IC	LDO, 1.2V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX125	-	VRH1252LN	LVR-IC	LDO, 1.25V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX130	-	VRH1302LN	LVR-IC	LDO, 1.3V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX135	-	VRH1352LN	LVR-IC	LDO, 1.35V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX140	-	VRH1402LN	LVR-IC	LDO, 1.4V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX145	-	VRH1452LN	LVR-IC	LDO, 1.45V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX150	-	VRH1502LN	LVR-IC	LDO, 1.5V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX155	-	VRH1552LN	LVR-IC	LDO, 1.55V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX160	-	VRH1602LN	LVR-IC	LDO, 1.6V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX165	-	VRH1652LN	LVR-IC	LDO, 1.65V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX170	-	VRH1702LN	LVR-IC	LDO, 1.7V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX175	-	VRH1752LN	LVR-IC	LDO, 1.75V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX180	-	VRH1802LN	LVR-IC	LDO, 1.8V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX185	-	VRH1852LN	LVR-IC	LDO, 1.85V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX190	-	VRH1902LN	LVR-IC	LDO, 1.9V±20mV, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX195	-	VRH1951NN	LVR-IC	LDO, 1.95V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX200	-	VRH2001NN	LVR-IC	LDO, 2.0V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX205	-	VRH2051NN	LVR-IC	LDO, 2.05V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX210	-	VRH2101NN	LVR-IC	LDO, 2.1V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX215	-	VRH2151NN	LVR-IC	LDO, 2.15V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX220	-	VRH2201NN	LVR-IC	LDO, 2.2V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX225	-	VRH2251NN	LVR-IC	LDO, 2.25V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX230	-	VRH2301NN	LVR-IC	LDO, 2.3V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX235	-	VRH2351NN	LVR-IC	LDO, 2.35V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX240	-	VRH2401NN	LVR-IC	LDO, 2.4V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX245	-	VRH2451NN	LVR-IC	LDO, 2.45V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX250	-	VRH2501NN	LVR-IC	LDO, 2.5V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX255	-	VRH2551NN	LVR-IC	LDO, 2.55V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX260	-	VRH2601NN	LVR-IC	LDO, 2.6V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX265	-	VRH2651NN	LVR-IC	LDO, 2.65V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX270	-	VRH2701NN	LVR-IC	LDO, 2.7V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX275	-	VRH2751NN	LVR-IC	LDO, 2.75V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX280	-	VRH2801NN	LVR-IC	LDO, 2.8V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX285	-	VRH2851NN	LVR-IC	LDO, 2.85V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HX290	-	VRH2901NN	LVR-IC	LDO, 2.9V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX295	-	VRH2951NN	LVR-IC	LDO, 2.95V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX300	-	VRH3001NN	LVR-IC	LDO, 3.0V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX305	-	VRH3051NN	LVR-IC	LDO, 3.05V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX310	-	VRH3101NN	LVR-IC	LDO, 3.1V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX315	-	VRH3151NN	LVR-IC	LDO, 3.15V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX320	-	VRH3201NN	LVR-IC	LDO, 3.2V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX325	-	VRH3251NN	LVR-IC	LDO, 3.25V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX330	-	VRH3301NN	LVR-IC	LDO, 3.3V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX335	-	VRH3351NN	LVR-IC	LDO, 3.35V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX340	-	VRH3401NN	LVR-IC	LDO, 3.4V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX345	-	VRH3451NN	LVR-IC	LDO, 3.45V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX350	-	VRH3501NN	LVR-IC	LDO, 3.5V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX355	-	VRH3551NN	LVR-IC	LDO, 3.55V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX360	-	VRH3601NN	LVR-IC	LDO, 3.6V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX365	-	VRH3651NN	LVR-IC	LDO, 3.65V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX370	-	VRH3701NN	LVR-IC	LDO, 3.7V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX375	-	VRH3751NN	LVR-IC	LDO, 3.75V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX380	-	VRH3801NN	LVR-IC	LDO, 3.8V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX385	-	VRH3851NN	LVR-IC	LDO, 3.85V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX390	-	VRH3901NN	LVR-IC	LDO, 3.9V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX395	-	VRH3951NN	LVR-IC	LDO, 3.95V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX400	-	VRH4001NN	LVR-IC	LDO, 4.0V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX405	-	VRH4051NN	LVR-IC	LDO, 4.05V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX410	-	VRH4101NN	LVR-IC	LDO, 4.1V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX415	-	VRH4151NN	LVR-IC	LDO, 4.15V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX420	-	VRH4201NN	LVR-IC	LDO, 4.2V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX425	-	VRH4251NN	LVR-IC	LDO, 4.25V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX430	-	VRH4301NN	LVR-IC	LDO, 4.3V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX435	-	VRH4351NN	LVR-IC	LDO, 4.35V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX440	-	VRH4401NN	LVR-IC	LDO, 4.4V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX445	-	VRH4451NN	LVR-IC	LDO, 4.45V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX450	-	VRH4501NN	LVR-IC	LDO, 4.5V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX455	-	VRH4551NN	LVR-IC	LDO, 4.55V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX460	-	VRH4601NN	LVR-IC	LDO, 4.6V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX465	-	VRH4651NN	LVR-IC	LDO, 4.65V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX470	-	VRH4701NN	LVR-IC	LDO, 4.7V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX475	-	VRH4751NN	LVR-IC	LDO, 4.75V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX480	-	VRH4801NN	LVR-IC	LDO, 4.8V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX485	-	VRH4851NN	LVR-IC	LDO, 4.85V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX490	-	VRH4901NN	LVR-IC	LDO, 4.9V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX495	-	VRH4951NN	LVR-IC	LDO, 4.95V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HX500	-	VRH5001NN	LVR-IC	LDO, 5.0V±1%, 250mA, +CE	SON-6	35hq	VR4	7q	Ans
HY	-	RP152N047C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
HZ	-	RP152N048C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
I	-	AG302-63G	MMIC	Buff/amp, DC..6GHz, 15.5dB (900MHz, 50Ω)	SOT-363	33a1	A1	7d	Wjc
IA	-	µPA602T	n-MOSFET	Dual, V-MOS, 50V, 100mA, <25Ω(10mA)	SOT-23-6	33fe	-	7b	Nec
IB	-	µPA611TA	n-MOSFET	Dual, V-MOS, LogL, 30V, ±100mA, <15Ω	SOT-23-6	33fe	-	7b	Nec
IT	-	XP04387	Si-n/p-Digi	Dual, 50V, 100mA, 150mW, 80MHz, R1/R2=1k/10k	SMini6	33	TD2	7b	Pan
J	-	AG303-63G	MMIC	Buff/amp, DC..6GHz, 20.5dB (900MHz, 50Ω)	SOT-363	33a1	A1	7d	Wjc
J0	-	R1131D301A	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
J0	-	RN1961FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=4k7/4k7	FS6	35	TD8	7b	Tos
J1	-	R1131D311A	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
J1	-	RN1962FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=20k/10k	FS6	35	TD8	7b	Tos
J1811	-	LD6918GL-11	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J1812	-	LD6918GL-12	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J1813	-	LD6918GL-13	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J1814	-	LD6918GL-14	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181H	-	LD6918GL-1H	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181I	-	LD6918GL-1I	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181J	-	LD6918GL-1J	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181K	-	LD6918GL-1K	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181L	-	LD6918GL-1L	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181M	-	LD6918GL-1M	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181N	-	LD6918GL-1N	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181O	-	LD6918GL-1O	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181P	-	LD6918GL-1P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181Q	-	LD6918GL-1Q	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181R	-	LD6918GL-1R	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181S	-	LD6918GL-1S	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J181T	-	LD6918GL-1T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181U	-	LD6918GL-1U	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181V	-	LD6918GL-1V	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181W	-	LD6918GL-1W	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181X	-	LD6918GL-1X	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181Y	-	LD6918GL-1Y	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J181Z	-	LD6918GL-1Z	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J1821	-	LD6918GL-21	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J1822	-	LD6918GL-22	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J1823	-	LD6918GL-23	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J1824	-	LD6918GL-24	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182H	-	LD6918GL-2H	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182I	-	LD6918GL-2I	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182J	-	LD6918GL-2J	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182K	-	LD6918GL-2K	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182L	-	LD6918GL-2L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182M	-	LD6918GL-2M	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182N	-	LD6918GL-2N	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182O	-	LD6918GL-2O	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182P	-	LD6918GL-2P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182Q	-	LD6918GL-2Q	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182R	-	LD6918GL-2R	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182S	-	LD6918GL-2S	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182T	-	LD6918GL-2T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182U	-	LD6918GL-2U	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182V	-	LD6918GL-2V	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182W	-	LD6918GL-2W	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182X	-	LD6918GL-2X	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182Y	-	LD6918GL-2Y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J182Z	-	LD6918GL-2Z	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J1831	-	LD6918GL-31	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J1832	-	LD6918GL-32	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J1833	-	LD6918GL-33	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J1834	-	LD6918GL-34	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183H	-	LD6918GL-3H	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183I	-	LD6918GL-3I	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183J	-	LD6918GL-3J	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183K	-	LD6918GL-3K	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183L	-	LD6918GL-3L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183M	-	LD6918GL-3M	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183N	-	LD6918GL-3N	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183O	-	LD6918GL-3O	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183P	-	LD6918GL-3P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183Q	-	LD6918GL-3Q	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183R	-	LD6918GL-3R	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183S	-	LD6918GL-3S	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183T	-	LD6918GL-3T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183U	-	LD6918GL-3U	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183V	-	LD6918GL-3V	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183W	-	LD6918GL-3W	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183X	-	LD6918GL-3X	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183Y	-	LD6918GL-3Y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J183Z	-	LD6918GL-3Z	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J1841	-	LD6918GL-41	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J1842	-	LD6918GL-42	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J1843	-	LD6918GL-43	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J1844	-	LD6918GL-44	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184H	-	LD6918GL-4H	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184I	-	LD6918GL-4I	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184J	-	LD6918GL-4J	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184K	-	LD6918GL-4K	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184L	-	LD6918GL-4L	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184M	-	LD6918GL-4M	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184N	-	LD6918GL-4N	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184O	-	LD6918GL-4O	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184P	-	LD6918GL-4P	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184Q	-	LD6918GL-4Q	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184R	-	LD6918GL-4R	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184S	-	LD6918GL-4S	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184T	-	LD6918GL-4T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J184U	-	LD6918GL-4U	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184V	-	LD6918GL-4V	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184W	-	LD6918GL-4W	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184X	-	LD6918GL-4X	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184Y	-	LD6918GL-4Y	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J184Z	-	LD6918GL-4Z	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18H1	-	LD6918GL-H1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18H2	-	LD6918GL-H2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18H3	-	LD6918GL-H3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18H4	-	LD6918GL-H4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HH	-	LD6918GL-HH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HI	-	LD6918GL-HI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HJ	-	LD6918GL-HJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HK	-	LD6918GL-HK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HL	-	LD6918GL-HL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HM	-	LD6918GL-HM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HN	-	LD6918GL-HN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HO	-	LD6918GL-HO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HP	-	LD6918GL-HP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HQ	-	LD6918GL-HQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HR	-	LD6918GL-HR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HS	-	LD6918GL-HS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HT	-	LD6918GL-HT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HU	-	LD6918GL-HU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HV	-	LD6918GL-HV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HW	-	LD6918GL-HW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HX	-	LD6918GL-HX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HY	-	LD6918GL-HY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18HZ	-	LD6918GL-HZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18I1	-	LD6918GL-I1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18I2	-	LD6918GL-I2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18I3	-	LD6918GL-I3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18I4	-	LD6918GL-I4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IH	-	LD6918GL-IH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18II	-	LD6918GL-II	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IJ	-	LD6918GL-IJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IK	-	LD6918GL-IK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IL	-	LD6918GL-IL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IM	-	LD6918GL-IM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IN	-	LD6918GL-IN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IO	-	LD6918GL-IO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IP	-	LD6918GL-IP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IQ	-	LD6918GL-IQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IR	-	LD6918GL-IR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IS	-	LD6918GL-IS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IT	-	LD6918GL-IT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IU	-	LD6918GL-IU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IV	-	LD6918GL-IV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IW	-	LD6918GL-IW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IX	-	LD6918GL-IX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IY	-	LD6918GL-IY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18IZ	-	LD6918GL-IZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18J1	-	LD6918GL-J1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18J2	-	LD6918GL-J2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18J3	-	LD6918GL-J3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18J4	-	LD6918GL-J4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JH	-	LD6918GL-JH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JI	-	LD6918GL-JI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JJ	-	LD6918GL-JJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JK	-	LD6918GL-JK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JL	-	LD6918GL-JL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JM	-	LD6918GL-JM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JN	-	LD6918GL-JN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JO	-	LD6918GL-JO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JP	-	LD6918GL-JP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JQ	-	LD6918GL-JQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JR	-	LD6918GL-JR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JS	-	LD6918GL-JS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JT	-	LD6918GL-JT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JU	-	LD6918GL-JU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J18JV	-	LD6918GL-JV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JW	-	LD6918GL-JW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JX	-	LD6918GL-JX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JY	-	LD6918GL-JY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18JZ	-	LD6918GL-JZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18K1	-	LD6918GL-K1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18K2	-	LD6918GL-K2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18K3	-	LD6918GL-K3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18K4	-	LD6918GL-K4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KH	-	LD6918GL-KH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KI	-	LD6918GL-KI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KJ	-	LD6918GL-KJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KK	-	LD6918GL-KK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KL	-	LD6918GL-KL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KM	-	LD6918GL-KM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KN	-	LD6918GL-KN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KO	-	LD6918GL-KO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KP	-	LD6918GL-KP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KQ	-	LD6918GL-KQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KR	-	LD6918GL-KR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KS	-	LD6918GL-KS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KT	-	LD6918GL-KT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KU	-	LD6918GL-KU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KV	-	LD6918GL-KV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KW	-	LD6918GL-KW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KX	-	LD6918GL-KX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KY	-	LD6918GL-KY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18KZ	-	LD6918GL-KZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18L1	-	LD6918GL-L1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18L2	-	LD6918GL-L2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18L3	-	LD6918GL-L3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18L4	-	LD6918GL-L4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LH	-	LD6918GL-LH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LI	-	LD6918GL-LI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LJ	-	LD6918GL-LJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LK	-	LD6918GL-LK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LL	-	LD6918GL-LL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LM	-	LD6918GL-LM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LN	-	LD6918GL-LN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LO	-	LD6918GL-LO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LP	-	LD6918GL-LP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LQ	-	LD6918GL-LQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LR	-	LD6918GL-LR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LS	-	LD6918GL-LS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LT	-	LD6918GL-LT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LU	-	LD6918GL-LU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LV	-	LD6918GL-LV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LW	-	LD6918GL-LW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LX	-	LD6918GL-LX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LY	-	LD6918GL-LY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18LZ	-	LD6918GL-LZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18M1	-	LD6918GL-M1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18M2	-	LD6918GL-M2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18M3	-	LD6918GL-M3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18M4	-	LD6918GL-M4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MH	-	LD6918GL-MH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MI	-	LD6918GL-MI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MJ	-	LD6918GL-MJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MK	-	LD6918GL-MK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ML	-	LD6918GL-ML	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MM	-	LD6918GL-MM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MN	-	LD6918GL-MN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MO	-	LD6918GL-MO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MP	-	LD6918GL-MP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MQ	-	LD6918GL-MQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MR	-	LD6918GL-MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MS	-	LD6918GL-MS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MT	-	LD6918GL-MT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MU	-	LD6918GL-MU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MV	-	LD6918GL-MV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J18MW	-	LD6918GL-MW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MX	-	LD6918GL-MX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MY	-	LD6918GL-MY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18MZ	-	LD6918GL-MZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18N1	-	LD6918GL-N1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18N2	-	LD6918GL-N2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18N3	-	LD6918GL-N3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18N4	-	LD6918GL-N4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NH	-	LD6918GL-NH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NI	-	LD6918GL-NI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NJ	-	LD6918GL-NJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NK	-	LD6918GL-NK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NL	-	LD6918GL-NL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NM	-	LD6918GL-NM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NN	-	LD6918GL-NN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NO	-	LD6918GL-NO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NP	-	LD6918GL-NP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NQ	-	LD6918GL-NQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NR	-	LD6918GL-NR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NS	-	LD6918GL-NS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NT	-	LD6918GL-NT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NU	-	LD6918GL-NU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NV	-	LD6918GL-NV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NW	-	LD6918GL-NW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NX	-	LD6918GL-NX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NY	-	LD6918GL-NY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18NZ	-	LD6918GL-NZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18O1	-	LD6918GL-O1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18O2	-	LD6918GL-O2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18O3	-	LD6918GL-O3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18O4	-	LD6918GL-O4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OH	-	LD6918GL-OH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OI	-	LD6918GL-OI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OJ	-	LD6918GL-OJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OK	-	LD6918GL-OK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OL	-	LD6918GL-OL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OM	-	LD6918GL-OM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ON	-	LD6918GL-ON	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OO	-	LD6918GL-OO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OP	-	LD6918GL-OP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OQ	-	LD6918GL-OQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OR	-	LD6918GL-OR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OS	-	LD6918GL-OS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OT	-	LD6918GL-OT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OU	-	LD6918GL-OU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OV	-	LD6918GL-OV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OW	-	LD6918GL-OW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OX	-	LD6918GL-OX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OY	-	LD6918GL-OY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18OZ	-	LD6918GL-OZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18P1	-	LD6918GL-P1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18P2	-	LD6918GL-P2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18P3	-	LD6918GL-P3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18P4	-	LD6918GL-P4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PH	-	LD6918GL-PH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PI	-	LD6918GL-PI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PJ	-	LD6918GL-PJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PK	-	LD6918GL-PK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PL	-	LD6918GL-PL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PM	-	LD6918GL-PM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PN	-	LD6918GL-PN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PO	-	LD6918GL-PO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PP	-	LD6918GL-PP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PQ	-	LD6918GL-PQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PR	-	LD6918GL-PR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PS	-	LD6918GL-PS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PT	-	LD6918GL-PT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PU	-	LD6918GL-PU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PV	-	LD6918GL-PV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PW	-	LD6918GL-PW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J18PX	-	LD6918GL-PX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PY	-	LD6918GL-PY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18PZ	-	LD6918GL-PZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18Q1	-	LD6918GL-Q1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18Q2	-	LD6918GL-Q2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18Q3	-	LD6918GL-Q3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18Q4	-	LD6918GL-Q4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QH	-	LD6918GL-QH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QI	-	LD6918GL-QI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QJ	-	LD6918GL-QJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QK	-	LD6918GL-QK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QL	-	LD6918GL-QL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QM	-	LD6918GL-QM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QN	-	LD6918GL-QN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QO	-	LD6918GL-QO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QP	-	LD6918GL-QP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QQ	-	LD6918GL-QQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QR	-	LD6918GL-QR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QS	-	LD6918GL-QS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QT	-	LD6918GL-QT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QU	-	LD6918GL-QU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QV	-	LD6918GL-QV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QW	-	LD6918GL-QW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QX	-	LD6918GL-QX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QY	-	LD6918GL-QY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18QZ	-	LD6918GL-QZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18R1	-	LD6918GL-R1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18R2	-	LD6918GL-R2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18R3	-	LD6918GL-R3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18R4	-	LD6918GL-R4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RH	-	LD6918GL-RH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RI	-	LD6918GL-RI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RJ	-	LD6918GL-RJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RK	-	LD6918GL-RK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RL	-	LD6918GL-RL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RM	-	LD6918GL-RM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RN	-	LD6918GL-RN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RO	-	LD6918GL-RO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RP	-	LD6918GL-RP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RQ	-	LD6918GL-RQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RR	-	LD6918GL-RR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RS	-	LD6918GL-RS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RT	-	LD6918GL-RT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RU	-	LD6918GL-RU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RV	-	LD6918GL-RV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RW	-	LD6918GL-RW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RX	-	LD6918GL-RX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RY	-	LD6918GL-RY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18RZ	-	LD6918GL-RZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18S1	-	LD6918GL-S1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18S2	-	LD6918GL-S2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18S3	-	LD6918GL-S3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18S4	-	LD6918GL-S4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SH	-	LD6918GL-SH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SI	-	LD6918GL-SI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SJ	-	LD6918GL-SJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SK	-	LD6918GL-SK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SL	-	LD6918GL-SL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SM	-	LD6918GL-SM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SN	-	LD6918GL-SN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SO	-	LD6918GL-SO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SP	-	LD6918GL-SP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SQ	-	LD6918GL-SQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SR	-	LD6918GL-SR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SS	-	LD6918GL-SS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ST	-	LD6918GL-ST	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SU	-	LD6918GL-SU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SV	-	LD6918GL-SV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SW	-	LD6918GL-SW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SX	-	LD6918GL-SX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J18SY	-	LD6918GL-SY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18SZ	-	LD6918GL-SZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18T1	-	LD6918GL-T1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18T2	-	LD6918GL-T2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18T3	-	LD6918GL-T3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18T4	-	LD6918GL-T4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TH	-	LD6918GL-TH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TI	-	LD6918GL-TI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TJ	-	LD6918GL-TJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TK	-	LD6918GL-TK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TL	-	LD6918GL-TL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TM	-	LD6918GL-TM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TN	-	LD6918GL-TN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TO	-	LD6918GL-TO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TP	-	LD6918GL-TP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TQ	-	LD6918GL-TQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TR	-	LD6918GL-TR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TS	-	LD6918GL-TS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TT	-	LD6918GL-TT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TU	-	LD6918GL-TU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TV	-	LD6918GL-TV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TW	-	LD6918GL-TW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TX	-	LD6918GL-TX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TY	-	LD6918GL-TY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18TZ	-	LD6918GL-TZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18U1	-	LD6918GL-U1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18U2	-	LD6918GL-U2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18U3	-	LD6918GL-U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18U4	-	LD6918GL-U4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UH	-	LD6918GL-UH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UI	-	LD6918GL-UI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UJ	-	LD6918GL-UJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UK	-	LD6918GL-UK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UL	-	LD6918GL-UL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UM	-	LD6918GL-UM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UN	-	LD6918GL-UN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UO	-	LD6918GL-UO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UP	-	LD6918GL-UP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UQ	-	LD6918GL-UQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UR	-	LD6918GL-UR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18US	-	LD6918GL-US	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UT	-	LD6918GL-UT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UU	-	LD6918GL-UU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UV	-	LD6918GL-UV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UW	-	LD6918GL-UW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UX	-	LD6918GL-UX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UY	-	LD6918GL-UY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18UZ	-	LD6918GL-UZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18V1	-	LD6918GL-V1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18V2	-	LD6918GL-V2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18V3	-	LD6918GL-V3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18V4	-	LD6918GL-V4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VH	-	LD6918GL-VH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VI	-	LD6918GL-VI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VJ	-	LD6918GL-VJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VK	-	LD6918GL-VK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VL	-	LD6918GL-VL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VM	-	LD6918GL-VM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VN	-	LD6918GL-VN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VO	-	LD6918GL-VO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VP	-	LD6918GL-VP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VQ	-	LD6918GL-VQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VR	-	LD6918GL-VR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VS	-	LD6918GL-VS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VT	-	LD6918GL-VT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VU	-	LD6918GL-VU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VV	-	LD6918GL-VV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VW	-	LD6918GL-VW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VX	-	LD6918GL-VX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18VY	-	LD6918GL-VY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J18VZ	-	LD6918GL-VZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18W1	-	LD6918GL-W1	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18W2	-	LD6918GL-W2	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18W3	-	LD6918GL-W3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18W4	-	LD6918GL-W4	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WH	-	LD6918GL-WH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WI	-	LD6918GL-WI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WJ	-	LD6918GL-WJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WK	-	LD6918GL-WK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WL	-	LD6918GL-WL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WM	-	LD6918GL-WM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WN	-	LD6918GL-WN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WO	-	LD6918GL-WO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WP	-	LD6918GL-WP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WQ	-	LD6918GL-WQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WR	-	LD6918GL-WR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WS	-	LD6918GL-WS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WT	-	LD6918GL-WT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WU	-	LD6918GL-WU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WV	-	LD6918GL-WV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WW	-	LD6918GL-WW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WX	-	LD6918GL-WX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WY	-	LD6918GL-WY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18WZ	-	LD6918GL-WZ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18X1	-	LD6918GL-X1	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18X2	-	LD6918GL-X2	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18X3	-	LD6918GL-X3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18X4	-	LD6918GL-X4	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XH	-	LD6918GL-XH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XI	-	LD6918GL-XI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XJ	-	LD6918GL-XJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XK	-	LD6918GL-XK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XL	-	LD6918GL-XL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XM	-	LD6918GL-XM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XN	-	LD6918GL-XN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XO	-	LD6918GL-XO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XP	-	LD6918GL-XP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XQ	-	LD6918GL-XQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XR	-	LD6918GL-XR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XS	-	LD6918GL-XS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XT	-	LD6918GL-XT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XU	-	LD6918GL-XU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XV	-	LD6918GL-XV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XW	-	LD6918GL-XW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XX	-	LD6918GL-XX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XY	-	LD6918GL-XY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18XZ	-	LD6918GL-XZ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18Y1	-	LD6918GL-Y1	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18Y2	-	LD6918GL-Y2	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18Y3	-	LD6918GL-Y3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18Y4	-	LD6918GL-Y4	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YH	-	LD6918GL-YH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YI	-	LD6918GL-YI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YJ	-	LD6918GL-YJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YK	-	LD6918GL-YK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YL	-	LD6918GL-YL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YM	-	LD6918GL-YM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YN	-	LD6918GL-YN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YO	-	LD6918GL-YO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YP	-	LD6918GL-YP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YQ	-	LD6918GL-YQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YR	-	LD6918GL-YR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YS	-	LD6918GL-YS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YT	-	LD6918GL-YT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YU	-	LD6918GL-YU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YV	-	LD6918GL-YV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YW	-	LD6918GL-YW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YX	-	LD6918GL-YX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YY	-	LD6918GL-YY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18YZ	-	LD6918GL-YZ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
J18Z1	-	LD6918GL-Z1	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18Z2	-	LD6918GL-Z2	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.65V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18Z3	-	LD6918GL-Z3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18Z4	-	LD6918GL-Z4	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.15V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZH	-	LD6918GL-ZH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZI	-	LD6918GL-ZI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZJ	-	LD6918GL-ZJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZK	-	LD6918GL-ZK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZL	-	LD6918GL-ZL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZM	-	LD6918GL-ZM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZN	-	LD6918GL-ZN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZO	-	LD6918GL-ZO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZP	-	LD6918GL-ZP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZQ	-	LD6918GL-ZQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZR	-	LD6918GL-ZR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZS	-	LD6918GL-ZS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZT	-	LD6918GL-ZT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZU	-	LD6918GL-ZU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZV	-	LD6918GL-ZV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZW	-	LD6918GL-ZW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZX	-	LD6918GL-ZX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZY	-	LD6918GL-ZY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J18ZZ	-	LD6918GL-ZZ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 300mA, +CE	SOT-26	33zc	VR19	7qa	Ltr
J2	-	KRA736E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=1k/10k	TES6	35	TD7	7k	Kec
J2	-	KRA736U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=1k/10k	US6	33	TD4	7k	Kec
J2	-	R1131D321A	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
J2	-	RN1963FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=22k/22k	FS6	35	TD8	7b	Tos
J3	-	R1131D331A	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
J3	-	RN1964FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=47k/47k	FS6	35	TD8	7b	Tos
J4	-	KRA737E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	TES6	35	TD7	7k	Kec
J4	-	KRA737U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	US6	33	TD4	7k	Kec
J4	-	RN1965FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=2k2/47k	FS6	35	TD8	7b	Tos
J5	-	KRA738E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	TES6	35	TD7	7k	Kec
J5	-	KRA738U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	US6	33	TD4	7k	Kec
J5	-	RN1966FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=4k7/47k	FS6	35	TD8	7b	Tos
J6	-	KRA739E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	TES6	35	TD7	7k	Kec
J6	-	KRA739U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	US6	33	TD4	7k	Kec
J6	-	RN1967FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=10k/47k	FS6	35	TD8	7b	Tos
J7	-	KRA740E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/4.7k	TES6	35	TD7	7k	Kec
J7	-	KRA740U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/4.7k	US6	33	TD4	7k	Kec
J7	-	RN1968FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=22k/47k	FS6	35	TD8	7b	Tos
J8	-	KRA741E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	TES6	35	TD7	7k	Kec
J8	-	KRA741U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	US6	33	TD4	7k	Kec
J8	-	RN1969FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=47k/22k	FS6	35	TD8	7b	Tos
J9	-	KRA742E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	TES6	35	TD7	7k	Kec
J9	-	KRA742U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	US6	33	TD4	7k	Kec
J9	-	RN1901FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=4k7/4k7	US6	33	TD3	7b	Tos
J9	-	RN1970FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1=4k7	FS6	35	TD8	7b	Tos
JA	-	µPA603T	p-MOSFET	Dual, V-MOS, 50V, 100mA, <60Ω(10mA)	SOT-23-6	33fe	-	7b	Nec
JA	-	KRA721E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	TES6	35	TD7	7k	Kec
JA	-	KRA721U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	US6	33	TD4	7k	Kec
JA	-	RP154N001A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JA	-	TWG4148CD-70WS	Si-diode	Quad, Sw, 100V, 150mA, Vf<1.25V(150mA), <4pF	SOT-363	33	D6	7b	Ttr
JAB	-	MMBD4448HSDW	Si-diode	Quad, Sw, Fast, 75V, 500mA, Vf<1.25V(150mA), <4ns	SOT-363	33	D10	7k	Di
JB	-	µPA610TA	p-MOSFET	Dual, V-MOS, LogL, 30V, ±100mA, <60Ω	SOT-23-6	33fe	-	7b	Nec
JB	-	KRA722E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	TES6	35	TD7	7k	Kec
JB	-	KRA722U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	US6	33	TD4	7k	Kec
JB	-	RP154N002A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JC	-	AAT3221IJS-2.9	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky
JC	-	KRA723E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	TES6	35	TD7	7k	Kec
JC	-	KRA723U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	US6	33	TD4	7k	Kec
JC	-	RP154N003A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JC	-	TWG4148AD-56WS	Si-diode	Quad, Sw, 100V, 150mA, Vf<1.25V(150mA), <4pF	SOT-363	33	D8	7b	Ttr
JD	-	KRA724E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	TES6	35	TD7	7k	Kec
JD	-	KRA724U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	US6	33	TD4	7k	Kec
JD	-	RP154N004A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JE	-	KRA725E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	TES6	35	TD7	7k	Kec
JE	-	KRA725U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	US6	33	TD4	7k	Kec
JE	-	RP154N005A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JF	-	KRA726E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	TES6	35	TD7	7k	Kec





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JF	-	KRA726U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	US6	33	TD4	7k	Kec
JF	-	RN1902FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1/R2=20k/10k	US6	33	TD3	7b	Tos
JF	-	RN1971FS	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, 250MHz, R1=10k	FS6	35	TD8	7b	Tos
JF	-	RP154N006A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JG	-	RP154N007A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JG	-	TWG4148SD-99WS	Si-diode	Quad, Sw, 100V, 150mA, Vf<1.25V(150mA), <4pF	SOT-363	33	D10	7b	Ttr
JH	-	KRA727E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	TES6	35	TD7	7k	Kec
JH	-	KRA727U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	US6	33	TD4	7k	Kec
JH	-	RP154N008A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JI	-	KRA728E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	TES6	35	TD7	7k	Kec
JI	-	KRA728U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	US6	33	TD4	7k	Kec
JJ	-	KRA729E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	TES6	35	TD7	7k	Kec
JJ	-	KRA729U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	US6	33	TD4	7k	Kec
JJ	-	NC7SZ02L6	CMOS-Log	2-input NOR gate	MPAK-6	33	Log2	7b	F
JJ	-	RP154N009A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JK	-	KRA730E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4.7k	TES6	35	TD7	7k	Kec
JK	-	KRA730U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4.7k	US6	33	TD4	7k	Kec
JK	-	RP154N010A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JL	-	RP154N011A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JM	-	KRA731E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	TES6	35	TD7	7k	Kec
JM	-	KRA731U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	US6	33	TD4	7k	Kec
JM	-	RP154N012A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JN	-	KRA732E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=100k	TES6	35	TD7	7k	Kec
JN	-	KRA732U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=100k	US6	33	TD4	7k	Kec
JN	-	RP154N013A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JO	-	KRA733E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=22k	TES6	35	TD7	7k	Kec
JO	-	KRA733U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=22k	US6	33	TD4	7k	Kec
JP	-	KRA734E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=47k	TES6	35	TD7	7k	Kec
JP	-	KRA734U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=47k	US6	33	TD4	7k	Kec
JP	-	RP154N014A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JQ	-	RP154N015A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JR	-	RP154N016A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JS	-	RP154N017A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JSs	-	BAS21U	Si-diode	Triple, Sw, Fast, 200V, 250mA, Vf=1V(0.1A), 250mW, <50ns	SC-74	33dd	-	7b	Inf
JT	-	RP154N018A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JU	-	RP154N019A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JV	-	RP154N020A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JW	-	RP154N021A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JX	-	RP154N022A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JY	-	RP154N023A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
JZ	-	RP154N024A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
K0	-	R1131D181A5	LVR-IC	LDO, 1.85V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
K0	-	R5426D101AA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.01V	SON-6	xk	VBM1	7g	Ric
K0	-	R5426N101AA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.01V	SOT-23-6	xk	VBM1	7da	Ric
K0	-	RN2961FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=4.7k/4.7k	FS6	35	TD8	7b	Tos
K01	-	TLC363C5V5	Z-diode	Triple, 5.5V±5%, 200mW, Bidir.	SOT-363	33dy	-	7k	Di
K01C	-	R1232D001C	DC-DC-IC	PWM step-down, adjustable, 1MHz	SON-8	el	-	8c	Ric
K01D	-	R1232D001D	DC-DC-IC	PWM step-down, adjustable, 2.25MHz	SON-8	el	-	8c	Ric
K03	-	TLC363C6V4	Z-diode	Triple, 6.4V±5%, 200mW, Bidir.	SOT-363	33dy	-	7k	Di
K05	-	TLC363C7V0	Z-diode	Triple, 7V±5%, 200mW, Bidir.	SOT-363	33dy	-	7k	Di
K07	-	TLC363C20V8	Z-diode	Triple, 20V±5%, 200mW, Bidir.	SOT-363	33dy	-	7k	Di
K09A	-	R1232D091A	DC-DC-IC	PWM step-down, 0.91V±2%, 1MHz	SON-8	el	-	8c	Ric
K09B	-	R1232D091B	DC-DC-IC	PWM step-down, 0.91V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K1	-	R1131D281A5	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
K1	-	R5426D102AA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.02V	SON-6	xk	VBM1	7g	Ric
K1	-	R5426N102AA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.02V	SOT-23-6	xk	VBM1	7da	Ric
K1	-	RN2962FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=10k/10k	FS6	35	TD8	7b	Tos
K10A	-	R1232D101A	DC-DC-IC	PWM step-down, 1V±2%, 1MHz	SON-8	el	-	8c	Ric
K10B	-	R1232D101B	DC-DC-IC	PWM step-down, 1V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K11A	-	R1232D111A	DC-DC-IC	PWM step-down, 1.1V±2%, 1MHz	SON-8	el	-	8c	Ric
K11B	-	R1232D111B	DC-DC-IC	PWM step-down, 1.1V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K12A	-	R1232D121A	DC-DC-IC	PWM step-down, 1.2V±2%, 1MHz	SON-8	el	-	8c	Ric
K12B	-	R1232D121B	DC-DC-IC	PWM step-down, 1.2V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K13A	-	R1232D131A	DC-DC-IC	PWM step-down, 1.3V±2%, 1MHz	SON-8	el	-	8c	Ric
K13B	-	R1232D131B	DC-DC-IC	PWM step-down, 1.3V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K14A	-	R1232D141A	DC-DC-IC	PWM step-down, 1.4V±2%, 1MHz	SON-8	el	-	8c	Ric
K14B	-	R1232D141B	DC-DC-IC	PWM step-down, 1.4V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K15A	-	R1232D151A	DC-DC-IC	PWM step-down, 1.5V±2%, 1MHz	SON-8	el	-	8c	Ric
K15B	-	R1116D151B	LVR-IC	LDO, Low noise, 1.5V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K15B	-	R1232D151B	DC-DC-IC	PWM step-down, 1.5V±2%, 2.25MHz	SON-8	el	-	8c	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K15D	-	R1116D151D	LVR-IC	LDO, Low noise, 1.5V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K16A	-	R1232D161A	DC-DC-IC	PWM step-down, 1.6V±2%, 1MHz	SON-8	el	-	8c	Ric
K16B	-	R1116D161B	LVR-IC	LDO, Low noise, 1.6V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K16B	-	R1232D161B	DC-DC-IC	PWM step-down, 1.6V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K16D	-	R1116D161D	LVR-IC	LDO, Low noise, 1.6V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K17A	-	R1232D171A	DC-DC-IC	PWM step-down, 1.7V±2%, 1MHz	SON-8	el	-	8c	Ric
K17B	-	R1116D171B	LVR-IC	LDO, Low noise, 1.7V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K17B	-	R1232D171B	DC-DC-IC	PWM step-down, 1.7V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K17D	-	R1116D171D	LVR-IC	LDO, Low noise, 1.7V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K18A	-	R1232D181A	DC-DC-IC	PWM step-down, 1.8V±2%, 1MHz	SON-8	el	-	8c	Ric
K18B	-	R1116D181B	LVR-IC	LDO, Low noise, 1.8V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K18B	-	R1232D181B	DC-DC-IC	PWM step-down, 1.8V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K18D	-	R1116D181D	LVR-IC	LDO, Low noise, 1.8V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K19A	-	R1232D191A	DC-DC-IC	PWM step-down, 1.9V±2%, 1MHz	SON-8	el	-	8c	Ric
K19A	-	TS419IDT	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	SOP-8	47	AFP11	8d	Ste
K19A	-	TS419IST	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	SSOP-8	47	AFP11	8d	Ste
K19B	-	R1116D191B	LVR-IC	LDO, Low noise, 1.9V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K19B	-	R1232D191B	DC-DC-IC	PWM step-down, 1.9V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K19B	-	TS419-2IST	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	SSOP-8	47	AFP38	8d	Ste
K19C	-	TS419-4IST	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	SSOP-8	47	AFP38	8d	Ste
K19D	-	R1116D191D	LVR-IC	LDO, Low noise, 1.9V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K19D	-	TS419-8IST	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	SSOP-8	47	AFP38	8d	Ste
K1B	-	MMDT4124	Si-npn	Dual, Sw, 30V, 200mA, 330mW, B=120..360, >300MHz	SOT-363	33	T8	7k	Di
K1F	-	BC847BS	Si-npn	Dual, GP, 50V, 100mA, 200mW, B=200..450, >100MHz	SOT-363	33	T8	7k	Di
K1P	-	MMDT2222A	Si-npn	Dual, GP, 75V, 600mA, 330mW, B=120..360, >300MHz	SOT-363	33	T8	7k	Di
K2	-	HN1L02FU	n/p-MOSFET	Dual, Sw, LogL, 20V, 50mA, 200mW, <40Ω(10mA), 0.15/0.13µs	US6	33	T6	7b	Tos
K2	-	R1131D121A5	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	SON-6	hq	VR4	7g	Ric
K2	-	R5426D103BB	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.03V	SON-6	xk	VBM1	7g	Ric
K2	-	R5426N103BB	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.03V	SOT-23-6	xk	VBM1	7da	Ric
K2	-	RN2963FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=22k/22k	FS6	35	TD8	7b	Tos
K20A	-	R1232D201A	DC-DC-IC	PWM step-down, 2V±2%, 1MHz	SON-8	el	-	8c	Ric
K20B	-	R1116D201B	LVR-IC	LDO, Low noise, 2.0V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K20B	-	R1232D201B	DC-DC-IC	PWM step-down, 2V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K20D	-	R1116D201D	LVR-IC	LDO, Low noise, 2.0V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K21	-	TS421IDT	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	SOP-8	47	AFP12	8d	Ste
K21	-	TS421IST	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	SSOP-8	47	AFP12	8d	Ste
K21A	-	R1232D211A	DC-DC-IC	PWM step-down, 2.1V±2%, 1MHz	SON-8	el	-	8c	Ric
K21A	-	TS421-2IST	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	SSOP-8	47	AFP27	8d	Ste
K21B	-	R1116D211B	LVR-IC	LDO, Low noise, 2.1V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K21B	-	R1232D211B	DC-DC-IC	PWM step-down, 2.1V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K21B	-	TS421-4IST	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	SSOP-8	47	AFP27	8d	Ste
K21C	-	TS421-8IST	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	SSOP-8	47	AFP27	8d	Ste
K21D	-	R1116D211D	LVR-IC	LDO, Low noise, 2.1V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K22A	-	R1232D221A	DC-DC-IC	PWM step-down, 2.2V±2%, 1MHz	SON-8	el	-	8c	Ric
K22B	-	R1116D221B	LVR-IC	LDO, Low noise, 2.2V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K22B	-	R1232D221B	DC-DC-IC	PWM step-down, 2.2V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K22D	-	R1116D221D	LVR-IC	LDO, Low noise, 2.2V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K23A	-	R1232D231A	DC-DC-IC	PWM step-down, 2.3V±2%, 1MHz	SON-8	el	-	8c	Ric
K23B	-	R1116D231B	LVR-IC	LDO, Low noise, 2.3V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K23B	-	R1232D231B	DC-DC-IC	PWM step-down, 2.3V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K23D	-	R1116D231D	LVR-IC	LDO, Low noise, 2.3V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K24A	-	R1232D241A	DC-DC-IC	PWM step-down, 2.4V±2%, 1MHz	SON-8	el	-	8c	Ric
K24B	-	R1116D241B	LVR-IC	LDO, Low noise, 2.4V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K24B	-	R1232D241B	DC-DC-IC	PWM step-down, 2.4V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K24D	-	R1116D241D	LVR-IC	LDO, Low noise, 2.4V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K25A	-	R1232D251A	DC-DC-IC	PWM step-down, 2.5V±2%, 1MHz	SON-8	el	-	8c	Ric
K25B	-	R1116D251B	LVR-IC	LDO, Low noise, 2.5V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K25B	-	R1232D251B	DC-DC-IC	PWM step-down, 2.5V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K25D	-	R1116D251D	LVR-IC	LDO, Low noise, 2.5V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K26A	-	R1232D261A	DC-DC-IC	PWM step-down, 2.6V±2%, 1MHz	SON-8	el	-	8c	Ric
K26B	-	R1116D261B	LVR-IC	LDO, Low noise, 2.6V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K26B	-	R1232D261B	DC-DC-IC	PWM step-down, 2.6V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K26D	-	R1116D261D	LVR-IC	LDO, Low noise, 2.6V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K27A	-	R1232D271A	DC-DC-IC	PWM step-down, 2.7V±2%, 1MHz	SON-8	el	-	8c	Ric
K27B	-	R1116D271B	LVR-IC	LDO, Low noise, 2.7V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K27B	-	R1232D271B	DC-DC-IC	PWM step-down, 2.7V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K27D	-	R1116D271D	LVR-IC	LDO, Low noise, 2.7V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K28A	-	R1232D281A	DC-DC-IC	PWM step-down, 2.8V±2%, 1MHz	SON-8	el	-	8c	Ric
K28B	-	R1116D281B	LVR-IC	LDO, Low noise, 2.8V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K28B	-	R1232D281B	DC-DC-IC	PWM step-down, 2.8V±2%, 2.25MHz	SON-8	el	-	8c	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K28D	-	R1116D281D	LVR-IC	LDO, Low noise, 2.8V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K29A	-	R1232D291A	DC-DC-IC	PWM step-down, 2.9V±2%, 1MHz	SON-8	el	-	8c	Ric
K29B	-	R1116D291B	LVR-IC	LDO, Low noise, 2.9V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K29B	-	R1232D291B	DC-DC-IC	PWM step-down, 2.9V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K29D	-	R1116D291D	LVR-IC	LDO, Low noise, 2.9V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K2B	-	MMDT4126	Si-pnp	GP, 25V, 200mA, 350mW, B=120..360, >250MHz	SOT-363	33	T10	7k	Di
K2F	-	MMDT2907A	Si-pnp	Dual, GP, 60V, 600mA, 330mW, B=100..300, >200MHz	SOT-363	33	T10	7k	Di
K3	-	HN1L03FU	n/p-MOSFET	Dual, Sw, LogL, 50V, 50mA, 200mW, <40Ω(10mA), 0.15/0.13µs	US6	33	T6	7b	Tos
K3	-	R5426D104BB	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.03V	SON-6	xk	VBM1	7g	Ric
K3	-	R5426N104BB	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.04V	SOT-23-6	xk	VBM1	7da	Ric
K3	-	RN2964FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=47k/47k	FS6	35	TD8	7b	Tos
K30A	-	R1232D301A	DC-DC-IC	PWM step-down, 3V±2%, 1MHz	SON-8	el	-	8c	Ric
K30B	-	R1116D301B	LVR-IC	LDO, Low noise, 3.0V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K30B	-	R1232D301B	DC-DC-IC	PWM step-down, 3V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K30D	-	R1116D301D	LVR-IC	LDO, Low noise, 3.0V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K31A	-	R1232D311A	DC-DC-IC	PWM step-down, 3.1V±2%, 1MHz	SON-8	el	-	8c	Ric
K31B	-	R1116D311B	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K31B	-	R1232D311B	DC-DC-IC	PWM step-down, 3.1V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K31D	-	R1116D311D	LVR-IC	LDO, Low noise, 3.1V±2%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K32A	-	R1232D321A	DC-DC-IC	PWM step-down, 3.2V±2%, 1MHz	SON-8	el	-	8c	Ric
K32B	-	R1116D321B	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K32B	-	R1232D321B	DC-DC-IC	PWM step-down, 3.2V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K32D	-	R1116D321D	LVR-IC	LDO, Low noise, 3.2V±2%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K33A	-	R1232D331A	DC-DC-IC	PWM step-down, 3.3V±2%, 1MHz	SON-8	el	-	8c	Ric
K33B	-	R1116D331B	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K33B	-	R1232D331B	DC-DC-IC	PWM step-down, 3.3V±2%, 2.25MHz	SON-8	el	-	8c	Ric
K33D	-	R1116D331D	LVR-IC	LDO, Low noise, 3.3V±2%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K34B	-	R1116D341B	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K34D	-	R1116D341D	LVR-IC	LDO, Low noise, 3.4V±2%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K35B	-	R1116D351B	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K35D	-	R1116D351D	LVR-IC	LDO, Low noise, 3.5V±2%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K36B	-	R1116D361B	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K36D	-	R1116D361D	LVR-IC	LDO, Low noise, 3.6V±2%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K37B	-	R1116D371B	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K37D	-	R1116D371D	LVR-IC	LDO, Low noise, 3.7V±2%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K38	-	BSS138DW	n-MOSFET	Dual, SIPMOS, LogL, 50V, 200mA, 200mW, 1.4Ω(0.22A), 20/20ns	SOT-363	33	T13	7k	Di
K38B	-	R1116D381B	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K38D	-	R1116D381D	LVR-IC	LDO, Low noise, 3.8V±2%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K39B	-	R1116D391B	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K39D	-	R1116D391D	LVR-IC	LDO, Low noise, 3.9V±2%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K3N	-	MMDT3906	Si-pnp	Dual, GP, 40V, 200mA, 250mW, B=60..300, >250MHz	SOT-363	33	T10	7k	Di
K3W	-	BC857BS	Si-pnp	Dual, AF, 50V, 100mA, 310mW, B=90..270, >100MHz	SOT-363	33	T10	7k	Di
K4	-	R5426D105CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.05V	SON-6	xk	VBM1	7g	Ric
K4	-	R5426N105CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.05V	SOT-23-6	xk	VBM1	7da	Ric
K4	-	RN2965FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=2.2k/47k	FS6	35	TD8	7b	Tos
K40B	-	R1116D401B	LVR-IC	LDO, Low noise, 4.0V±2%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K40D	-	R1116D401D	LVR-IC	LDO, Low noise, 4.0V±2%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K41B	-	R1116D181B5	LVR-IC	LDO, Low noise, 1.8V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K41D	-	R1116D181D5	LVR-IC	LDO, Low noise, 1.85V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K42B	-	R1116D281B5	LVR-IC	LDO, Low noise, 2.85V±1.5%, 150mA, +CE	SON1612-6	ve	VR4	7e	Ric
K42D	-	R1116D281D5	LVR-IC	LDO, Low noise, 2.85V±1.5%, 150mA, +CE, CL	SON1612-6	ve	VR4	7e	Ric
K43	-	BAS40TW	Si-diode	Triple, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-363	33dd	-	7l	Di
K44	-	BAS40DW-04	Si-diode	Quad, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-363	33	D10	7o	Di
K45	-	BAS40DW-05	Si-diode	Quad, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-363	33	D7	7o	Di
K46	-	BAS40DW-06	Si-diode	Quad, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-363	33	D8	7o	Di
K46	-	MMDT3946	Si-n/p	Dual, GP, 60V, 200mA, 150mW, B= 100..300, >300MHz	SOT-363	33	T9	7k	Di
K47	-	BAS40BRW	Si-diode	Quad, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-363	33	D9	7o	Di
K488	-	TS488IST	Lin-IC	AF PA, 2.5..5.5V, 2x120mW(16Ω), shutdown	MSOP-8	55	AFP7	8d	Ste
K489	-	TS489IST	Lin-IC	AF PA, 2.5..5.5V, 2x120mW(16Ω), shutdown	SSOP-8	47	AFP16	8d	Ste
K4N	-	MMDT5551	Si-npn	Dual, GP, 180V, 200mA, 200mW, B=80..250, <300MHz	SOT-363	33	T8	7k	Di
K4V	-	BC847BV	Si-npn	Dual, GP, 50V, 100mA, 200mW, B=200..450, >100MHz	SOT-666	35	T8	7k	Di
K5	-	74AVCH1T45GW	CMOS-Log	Dual supply translating transceiver with 3-state output	SOT-363	33	Log70	7b	Nxp
K5	-	NC7SP32L6	CMOS-Log	2-input OR gate	MPAK-6	33	Log4	7b	F
K5	-	R5426D105DA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.05V	SON-6	xk	VBM1	7g	Ric
K5	-	R5426N105DA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.05V	SOT-23-6	xk	VBM1	7da	Ric
K5	-	RN2966FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=4.7k/47k	FS6	35	TD8	7b	Tos
K52	-	BAV199DW	Si-diode	Quad, Sw, 60V, 150mA, Vf<1.25V(150mA), <3µs	SOT-363	33	D10	7o	Di
K5A	-	R5426D116GA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.16V	SON-6	xk	VBM1	7g	Ric
K5A	-	R5426N116GA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.16V	SOT-23-6	xk	VBM1	7da	Ric
K5F	-	QZX363C5V6	Z-diode	Quad, 5.6V±5%, 200mW	SOT-363	33	D18	7k	Di



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K5V	-	BC857BV	Si-pnp	Dual, AF, 50V, 100mA, 310mW, B=90..270, >100MHz	SOT-666	35	T10	7k	Di
K6	-	R5426D106CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.06V	SON-6	xk	VBM1	7g	Ric
K6	-	R5426N106CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.06V	SOT-23-6	xk	VBM1	7da	Ric
K6	-	RN2967FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=10k/47k	FS6	35	TD8	7b	Tos
K6F	-	QZX363C6V8	Z-diode	Quad, 6.8V±5%, 200mW	SOT-363	33	D18	7k	Di
K6N	-	MMDT3904	Si-npn	Dual, GP, 60V, 200mA, 250mW, B=100..300, >300MHz	SOT-363	33	T8	7k	Di
K7	-	NC7SP38L6	CMOS-Log	2-input NAND gate (ODO)	MPAK-6	33	Log17	7b	F
K7	-	R5426D106EA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.06V	SON-6	xk	VBM1	7g	Ric
K7	-	R5426N106EA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.06V	SOT-23-6	xk	VBM1	7da	Ric
K7	-	RN2968FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=22k/47k	FS6	35	TD8	7b	Tos
K71	-	BAS70DW-05	Si-diode	Quad, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33	D7	7l	Di
K72	-	2N7002DW	n-MOSFET	Dual, TMOS, 60V, 150mA, 200mW, <7.5Ω(0.5A), 7/11ns	SOT-363	33	T13	7b	Trs
K73	-	BAS70TW	Si-diode	Triple, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33dd	-	7f	Di
K74	-	BAS70DW-04	Si-diode	Quad, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33	D10	7l	Di
K75	-	BAS70BRW	Si-diode	Quad, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33	D9	7l	Di
K76	-	BAS70DW-06	Si-diode	Quad, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33	D8	7l	Di
K78	-	BAS70JW	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33dw	-	7l	Di
K7P	-	BC847PN	Si-n/p	Dual, AF, 50V, 100mA, 250mW, B=110..800, >100MHz	SOT-363	33	T9	7k	Di
K8	-	R5426D107CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.07V	SON-6	xk	VBM1	7g	Ric
K8	-	R5426N107CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.07V	SOT-23-6	xk	VBM1	7da	Ric
K8	-	RN2969FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=47k/22k	FS6	35	TD8	7b	Tos
K84	-	BSS84DW	p-MOSFET	Dual, V-MOS, LogL, 50V, 130mA, 300mW, 6Ω(100mA), 10/18ns	SOT-363	33	T14	7k	Di
K86A	-	TS486IDT	Lin-IC	AF PA, 2..5.5V, 2x100mW(16Ω), shutdown	SOP-8	47	AFP7	8d	Ste
K86A	-	TS486IST	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω), shutdown	MSOP-8	55	AFP7	8d	Ste
K86B	-	TS486-1IST	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω), shutdown	SSOP-8	47	AFP25	8d	Ste
K86C	-	TS486-2IST	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω), shutdown	SSOP-8	47	AFP25	8d	Ste
K86D	-	TS486-4IST	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω), shutdown	SSOP-8	47	AFP25	8d	Ste
K87A	-	TS487IDT	Lin-IC	AF PA, 2..5.5V, 2x100mW(16Ω), shutdown	SOP-8	47	AFP16	8d	Ste
K87A	-	TS487IST	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω), shutdown	SSOP-8	47	AFP16	8d	Ste
K87B	-	TS487-1IST	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω), shutdown	SSOP-8	47	AFP64	8d	Ste
K87C	-	TS487-2IST	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω), shutdown	SSOP-8	47	AFP64	8d	Ste
K87D	-	TS487-4IST	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω), shutdown	SSOP-8	47	AFP64	8d	Ste
K9	-	R5426D108CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.08V	SON-6	xk	VBM1	7g	Ric
K9	-	R5426N108CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.08V	SOT-23-6	xk	VBM1	7da	Ric
K9	-	RN2970FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=4.7k	FS6	35	TD8	7b	Tos
K990	-	TS4990IST	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Ste
K994	-	TS4994IST	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), select shutdown	SSOP-10	60	AFP19	8d	Ste
KA	-	µPA604T	Si-npn	Dual, 60V, 100mA, 250MHz	SOT-23-6	33	T8	7b	Nec
KA	-	µPA670T	Si-npn	Dual, 60V, 100mA, 250MHz	SC-95	33	T8	7b	Nec
KA	-	KRA751F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=4.7k/4.7k	TFS6	35	TD4	7b	Kec
KA	-	R5426D109EA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.09V	SON-6	xk	VBM1	7g	Ric
KA	-	R5426N109EA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.09V	SOT-23-6	xk	VBM1	7da	Ric
KA	-	RP154N025A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
KA2	-	BAS16TW	Si-diode	Triple, Sw, Fast, 75V, 300mA, Vf<1.25V(150mA), <4ns, 2pF	SOT-363	33dd	-	7k	Di
KA2	-	MMBD4148TW	Si-diode	Triple, Sw, Fast, 75V, 300mA, Vf<1.25V(150mA), <4ns, 2pF	SOT-363	33dd	-	7k	Di
KA3	-	MMBD4448DW	Si-diode	Dual, Sw, Fast, 75V, 500mA, Vf<1.25V(150mA), <4ns	SOT-363	33de	-	7k	Di
KA6	-	MMBD4448HADW	Si-diode	Quad, Sw, Fast, 75V, 500mA, Vf<1.25V(150mA), <4ns	SOT-363	33	D7	7k	Di
KA7	-	MMBD4448HCDW	Si-diode	Quad, Sw, Fast, 75V, 500mA, Vf<1.25V(150mA), <4ns	SOT-363	33	D7	7k	Di
KAA	-	MMBD4448HTW	Si-diode	Triple, Sw, Fast, 75V, 500mA, Vf<1.25V(150mA), <4ns	SOT-363	33dd	-	7k	Di
KAB	-	MMBD4448HSDW	Si-diode	Quad, Sw, Fast, 75V, 500mA, Vf<1.25V(150mA), <4ns	SOT-363	33	D10	7k	Di
KAD	-	MMBD4448HTM	Si-diode	Triple, Sw, Fast, 75V, 500mA, Vf<1.25V(150mA), <4ns	SOT-26	33bb	-	7k	Di
KB	-	KRA752F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=10k/10k	TFS6	35	TD4	7b	Kec
KB	-	R5426D110FA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.1V	SON-6	xk	VBM1	7g	Ric
KB	-	R5426N110FA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.1V	SOT-23-6	xk	VBM1	7da	Ric
KB	-	RP154N026A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
KC	-	KRA753F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=22k/22k	TFS6	35	TD4	7b	Kec
KC	-	R5426D111DA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.11V	SON-6	xk	VBM1	7g	Ric
KC	-	R5426N111DA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.11V	SOT-23-6	xk	VBM1	7da	Ric
KC	-	RP154N027A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
KC1	-	MMBZ5221BS	Z-diode	Dual, 2.4V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-363	33de	-	7f	Di
KC3	-	MMBZ5223BS	Z-diode	Dual, 2.7V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-363	33de	-	7f	Di
KC5	-	MMBZ5225BS	Z-diode	Dual, 3.0V±5%, Izt=20mA, Zzt=29Ω, 200mW	SOT-363	33de	-	7f	Di
KCA	-	BAV756DW	Si-diode	Quad, Fast Sw, 90V, 250mA, 250mW, Vf<1.25V(150mA), 2pF, <6ns	SOT-363	33	D13	7l	Di
KD	-	KRA754F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=4.7k/4.7k	TFS6	35	TD4	7b	Kec
KD	-	R5426D112FA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.12V	SON-6	xk	VBM1	7g	Ric
KD	-	R5426N112FA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.12V	SOT-23-6	xk	VBM1	7da	Ric
KD	-	RP154N028A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
KDA	-	SSM6K06FU	n-MOSFET	Sw, LogL, 20V, 1.1A, 300mW, <0.21Ω(500mA), 42/100ns	US6	33fc	-	7b	Tos
KDB	-	SSM6J06FU	p-MOSFET	Sw, LogL, 20V, 650mA, <0.7Ω(500mA)	US6	33fc	-	7b	Tos
KDE	-	SSM6K07FU	n-MOSFET	Sw, LogL, 30V, 1.5A, 300mW, <0.22Ω(750mA), 46/65ns	US6	33fc	-	7b	Tos

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KDF	-	SSM6J07FU	p-MOSFET	Sw, LogL, 30V, 800mA, <0.8Ω(500mA)	US6	33fc	-	7b	Tos
KE	-	R5426D113CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.13V	SON-6	xk	VBM1	7g	Ric
KE	-	R5426N113CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.13V	SOT-23-6	xk	VBM1	7da	Ric
KE	-	RP154N029A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
KE1	-	MMBZ5231BS	Z-diode	Dual, 5.1V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOT-363	33de	-	7f	Di
KE2	-	MMBZ5232BS	Z-diode	Dual, 5.6V±5%, Izt=20mA, Zzt=11Ω, 200mW	SOT-363	33de	-	7f	Di
KE3	-	MMBZ5233BS	Z-diode	Dual, 6.0V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOT-363	33de	-	7f	Di
KE4	-	MMBZ5234BS	Z-diode	Dual, 6.2V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOT-363	33de	-	7f	Di
KE5	-	MMBZ5235BS	Z-diode	Dual, 6.8V±5%, Izt=20mA, Zzt=5Ω, 200mW	SOT-363	33de	-	7f	Di
KF	-	R5426D114CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.14V	SON-6	xk	VBM1	7g	Ric
KF	-	R5426N114CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.14V	SOT-23-6	xk	VBM1	7da	Ric
KF	-	RN2971FS	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=10k	FS6	35	TD8	7b	Tos
KF	-	RP154N030A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
KF1	-	MMBZ5236BS	Z-diode	Dual, 7.5V±5%, Izt=20mA, Zzt=6Ω, 200mW	SOT-363	33de	-	7f	Di
KF2	-	MMBZ5237BS	Z-diode	Dual, 8.2V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOT-363	33de	-	7f	Di
KF3	-	MMBZ5238BS	Z-diode	Dual, 8.7V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOT-363	33de	-	7f	Di
KF4	-	MMBZ5239BS	Z-diode	Dual, 9.1V±5%, Izt=20mA, Zzt=10Ω, 200mW	SOT-363	33de	-	7f	Di
KF5	-	MMBZ5240BS	Z-diode	Dual, 10V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOT-363	33de	-	7f	Di
KFF	-	QZX363C12	Z-diode	Quad, 12V±5%, 200mW	SOT-363	33	D18	7k	Di
KG	-	KRA757F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=10k/47k	TFS6	35	TD4	7b	Kec
KG	-	R5426D111CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.11V	SON-6	xk	VBM1	7g	Ric
KG	-	R5426N111CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.11V	SOT-23-6	xk	VBM1	7da	Ric
KG	-	RP154N031A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.85V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
KG1	-	MMBZ5226BS	Z-diode	Dual, 3.3V±5%, Izt=20mA, Zzt=28Ω, 200mW	SOT-363	33de	-	7f	Di
KG2	-	MMBZ5227BS	Z-diode	Dual, 3.6V±5%, Izt=20mA, Zzt=24Ω, 200mW	SOT-363	33de	-	7f	Di
KG3	-	MMBZ5228BS	Z-diode	Dual, 3.9V±5%, Izt=20mA, Zzt=23Ω, 200mW	SOT-363	33de	-	7f	Di
KG4	-	MMBZ5229BS	Z-diode	Dual, 4.3V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOT-363	33de	-	7f	Di
KG5	-	MMBZ5230BS	Z-diode	Dual, 4.7V±5%, Izt=20mA, Zzt=19Ω, 200mW	SOT-363	33de	-	7f	Di
KGJ	-	BAV99BRW	Si-diode	Quad, Sw, 75V, 200mA, Vf<1.25V(150mA), <4ns	SOT-363	33	D9	7l	Di
KH	-	HN1K04FU	n-MOSFET	Dual, Sw, LogL, 50V, 50mA, 200mW, <50Ω(10mA), 0.11/.0.15µs	US6	33	T13	7b	Tos
KH	-	KRA758F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=22k/47k	TFS6	35	TD4	7b	Kec
KH	-	R5426D101CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.01V	SON-6	xk	VBM1	7g	Ric
KH	-	R5426N101CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.01V	SOT-23-6	xk	VBM1	7da	Ric
KH	-	RP154N032A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
KH1	-	MMBZ5241BS	Z-diode	Dual, 11V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOT-363	33de	-	7f	Di
KH2	-	MMBZ5242BS	Z-diode	Dual, 12V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-363	33de	-	7f	Di
KH3	-	MMBZ5243BS	Z-diode	Dual, 13V±5%, Izt=9.5mA, Zzt=13Ω, 200mW	SOT-363	33de	-	7f	Di
KH5	-	MMBZ5245BS	Z-diode	Dual, 15V±5%, Izt=8.5mA, Zzt=16Ω, 200mW	SOT-363	33de	-	7f	Di
KI	-	HN1K02FU	n-MOSFET	Dual, Sw, LogL, 20V, 50mA, 200mW, <40Ω(10mA), 0.14/0.14µs	US6	33	T13	7b	Tos
KJ	-	HN1K06FU	n-MOSFET	Dual, Sw, LogL, 20V, 100mA, 200mW, 6Ω(10mA), 0.28/0.34µs	US6	33	T13	7b	Tos
KJ	-	KRA759F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=47k/22k	TFS6	35	TD4	7b	Kec
KJ	-	R5426D102CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.02V	SON-6	xk	VBM1	7g	Ric
KJ	-	R5426N102CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.02V	SOT-23-6	xk	VBM1	7da	Ric
KJ	-	RP154N033A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
KJ1	-	MMBZ5246BS	Z-diode	Dual, 16V±5%, Izt=7.8mA, Zzt=17Ω, 200mW	SOT-363	33de	-	7f	Di
KJ3	-	MMBZ5248BS	Z-diode	Dual, 18V±5%, Izt=7.0mA, Zzt=23Ω, 200mW	SOT-363	33de	-	7f	Di
KJ5	-	MMBZ5250BS	Z-diode	Dual, 20V±5%, Izt=6.2mA, Zzt=25Ω, 200mW	SOT-363	33de	-	7f	Di
KJA	-	BAV70DW	Si-diode	Quad, Sw, 75V, 200mA, Vf<1.25V(150mA), <4ns	SOT-363	33	D7	7o	Di
KJA	-	BAW567DW	Si-diode	Quad, Sw, 100V, 300mA, 200mW, Vf<1.25V(100mA), <4ns	SOT-363	33	D7	7o	Di
KJC	-	BAW56DW	Si-diode	Quad, Fast Sw, 100V, 300mA, 200mW, <6ns	SOT-363	33	D8	7o	Di
KJF	-	QZX363C15	Z-diode	Quad, 15V±5%, 200mW	SOT-363	33	D18	7k	Di
KK	-	HN1K05FU	n-MOSFET	Dual, Sw, LogL, 20V, 100mA, 200mW, 28Ω(10mA), 0.35/0.2µs	US6	33	T13	7b	Tos
KK	-	KRA760F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=4.7k	TFS6	35	TD4	7b	Kec
KK	-	R5426D110EA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.1V	SON-6	xk	VBM1	7g	Ric
KK	-	R5426N110EA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.1V	SOT-23-6	xk	VBM1	7da	Ric
KK	-	RP154N034A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
KK1	-	MMBZ5251BS	Z-diode	Dual, 22V±5%, Izt=5.6mA, Zzt=29Ω, 200mW	SOT-363	33de	-	7f	Di
KK2	-	MMBZ5252BS	Z-diode	Dual, 24V±5%, Izt=5.2mA, Zzt=33Ω, 200mW	SOT-363	33de	-	7f	Di
KK4	-	MMBZ5254BS	Z-diode	Dual, 27V±5%, Izt=5.0mA, Zzt=41Ω, 200mW	SOT-363	33de	-	7f	Di
KK5	-	MMBZ5255BS	Z-diode	Dual, 28V±5%, Izt=4.5mA, Zzt=44Ω, 200mW	SOT-363	33de	-	7f	Di
KL	-	KRA761F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=10k	TFS6	35	TD4	7b	Kec
KL	-	R5426D116EA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.16V	SON-6	xk	VBM1	7g	Ric
KL	-	R5426N116EA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.16V	SOT-23-6	xk	VBM1	7da	Ric
KL	-	RP154N035A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
KL1	-	TBZ363C5V5	Z-diode	Triple, 5.5V±5%, 200mW, Bidir.	SOT-363	33dy	-	7k	Di
KL3	-	TBZ363C6V4	Z-diode	Triple, 6.4V±5%, 200mW, Bidir.	SOT-363	33dy	-	7k	Di
KL5	-	TBZ363C7V0	Z-diode	Triple, 7V±5%, 200mW, Bidir.	SOT-363	33dy	-	7k	Di
KL6	-	BAT54ADW	Si-diode	Quad, SBD, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-363	33	D8	7f	Di
KL7	-	BAT54CDW	Si-diode	Quad, SBD, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-363	33	D7	7f	Di
KL8	-	BAT54SDW	Si-diode	Quad, SBD, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-363	33	D10	7k	Di



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KLA	-	BAT54TW	Si-diode	Triple, SBD, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-363	33bb	-	7k	Di
KLB	-	BAT54BRW	Si-diode	Quad, SBD, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-363	33	D9	7k	Di
KM	-	DDZX5V1BTS	Z-diode	Triple, 5.1V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
KM	-	R5426D102FA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.02V	SON-6	xk	VBM1	7g	Ric
KM	-	R5426N102FA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.02V	SOT-23-6	xk	VBM1	7da	Ric
KM	-	RP154N036A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
KM1	-	MMBZ5256BS	Z-diode	Dual, 30V±5%, Izt=4.2mA, Zzt=49Ω, 200mW	SOT-363	33de	-	7f	Di
KM2	-	MMBZ5257BS	Z-diode	Dual, 3V±5%, Izt=3.8mA, Zzt=58Ω, 200mW	SOT-363	33de	-	7f	Di
KM3	-	MMBZ5258BS	Z-diode	Dual, 36V±5%, Izt=3.4mA, Zzt=70Ω, 200mW	SOT-363	33de	-	7f	Di
KM4	-	MMBZ5259BS	Z-diode	Dual, 39V±5%, Izt=3.2mA, Zzt=80Ω, 200mW	SOT-363	33de	-	7f	Di
KMF	-	QZX363C20	Z-diode	Quad, 20V±5%, 200mW	SOT-363	33	D18	7k	Di
KN	-	DDZX5V6BTS	Z-diode	Triple, 5.6V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
KN	-	KRA763F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=22k	TFS6	35	TD4	7b	Kec
KN	-	R5426D119FA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.19V	SON-6	xk	VBM1	7g	Ric
KN	-	R5426N119FA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.19V	SOT-23-6	xk	VBM1	7da	Ric
KO	-	DDZX6V2BTS	Z-diode	Triple, 6.2V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
KP	-	µPA895TD	Si-npn	Dual, RF-Osc, 9V, 100mA, 190mW, B=100..145, 6.5GHz	SOT-363	33	T1	7b	Cel
KP	-	HN1K03FU	n-MOSFET	Dual, Sw, LogL, 20V, 100mA, 200mW, <12Ω(10mA), 0.16/0.15µs	US6	33	T13	7b	Tos
KP	-	KRA764F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=47k	TFS6	35	TD4	7b	Kec
KP	-	R5426D120CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.2V	SON-6	xk	VBM1	7g	Ric
KP	-	R5426N120CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.2V	SOT-23-6	xk	VBM1	7da	Ric
KP1	-	BZX84C11S	Z-diode	Triple, 10.4..11.6V, Zzt=20Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KP2	-	BZX84C12S	Z-diode	Triple, 11.4..12.7V, Zzt=25Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KP3	hd	BZX84C13S	Z-diode	Triple, 12.4..14.1V, Zzt=30Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KP4	-	BZX84C15S	Z-diode	Triple, 13.8..15.6V, Zzt=30Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KP5	-	BZX84C16S	Z-diode	Triple, 15.3..17.1V, Zzt=40Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KP6	-	BZX84C18S	Z-diode	Triple, 16.8..19.1V, Zzt=45Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KP7	-	BZX84C20S	Z-diode	Triple, 18.8..21.2V, Zzt=55Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KP8	-	BZX84C22S	Z-diode	Triple, 20.8..23.3V, Zzt=55Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KP9	-	BZX84C24S	Z-diode	Triple, 22.8..25.6V, Zzt=70Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KPA	-	BZX84C27S	Z-diode	Triple, 25.1..28.9V, Zzt=80Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KPB	-	BZX84C30S	Z-diode	Triple, 28..32V, Zzt=80Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KPC	-	BZX84C33S	Z-diode	Triple, 31..35V, Zzt=80Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KPD	-	BZX84C36S	Z-diode	Triple, 34..38V, Zzt=90Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KPE	-	BZX84C39S	Z-diode	Triple, 37..41V, Zzt=130Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KR	-	R5426D121BB	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.21V	SON-6	xk	VBM1	7g	Ric
KR	-	R5426N121BB	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.21V	SOT-23-6	xk	VBM1	7da	Ric
KR1	-	BZX84C4V7S	Z-diode	Triple, 4.4..5.0V, Zzt=80Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KR1	-	MMBZ5241BTS	Z-diode	Triple, 11V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOT-363	33dd	-	7c	Di
KR2	-	BZX84C5V1S	Z-diode	Triple, 4.8..5.4V, Zzt=60Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KR2	-	MMBZ5242BTS	Z-diode	Triple, 12V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-363	33dd	-	7c	Di
KR3	-	BZX84C5V6S	Z-diode	Triple, 5.2..6.0V, Zzt=40Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KR3	-	MMBZ5243BTS	Z-diode	Triple, 13V±5%, Izt=9.5mA, Zzt=13Ω, 200mW	SOT-363	33dd	-	7c	Di
KR4	-	BZX84C6V2S	Z-diode	Triple, 5.8..6.6V, Zzt=10Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KR4	-	MMBZ5245BTS	Z-diode	Triple, 15V±5%, Izt=8.5mA, Zzt=16Ω, 200mW	SOT-363	33dd	-	7c	Di
KR5	-	BZX84C6V8S	Z-diode	Triple, 6.4..7.2V, Zzt=15Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KR5	-	MMBZ5246BTS	Z-diode	Triple, 16V±5%, Izt=7.8mA, Zzt=17Ω, 200mW	SOT-363	33dd	-	7c	Di
KR6	-	BZX84C7V5S	Z-diode	Triple, 7.0..7.9V, Zzt=15Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KR6	-	MMBZ5248BTS	Z-diode	Triple, 18V±5%, Izt=7.0mA, Zzt=23Ω, 200mW	SOT-363	33dd	-	7c	Di
KR7	-	BZX84C8V2S	Z-diode	Triple, 7.7..8.7V, Zzt=15Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KR7	-	MMBZ5250BTS	Z-diode	Triple, 20V±5%, Izt=6.2mA, Zzt=25Ω, 200mW	SOT-363	33dd	-	7c	Di
KR8	-	BZX84C9V1S	Z-diode	Triple, 8.5..9.6V, Zzt=15Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KR8	-	MMBZ5251BTS	Z-diode	Triple, 22V±5%, Izt=5.6mA, Zzt=29Ω, 200mW	SOT-363	33dd	-	7c	Di
KR9	-	BZX84C10S	Z-diode	Triple, 9.4..10.6V, Zzt=20Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KR9	-	MMBZ5252BTS	Z-diode	Triple, 24V±5%, Izt=5.2mA, Zzt=33Ω, 200mW	SOT-363	33dd	-	7c	Di
KRA	-	MMBZ5254BTS	Z-diode	Triple, 27V±5%, Izt=5.0mA, Zzt=41Ω, 200mW	SOT-363	33dd	-	7c	Di
KRB	-	BZX84C2V4S	Z-diode	Triple, 2.2..2.6V, Zzt=100Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KRB	-	MMBZ5256BTS	Z-diode	Triple, 30V±5%, Izt=4.2mA, Zzt=49Ω, 200mW	SOT-363	33dd	-	7c	Di
KRC	-	BZX84C2V7S	Z-diode	Triple, 2.5..2.9V, Zzt=100Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KRC	-	MMBZ5257BTS	Z-diode	Triple, 3V±5%, Izt=3.8mA, Zzt=58Ω, 200mW	SOT-363	33dd	-	7c	Di
KRD	-	BZX84C3V0S	Z-diode	Triple, 2.8..3.2V, Zzt=95Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KRD	-	MMBZ5258BTS	Z-diode	Triple, 36V±5%, Izt=3.4mA, Zzt=70Ω, 200mW	SOT-363	33dd	-	7c	Di
KRE	-	BZX84C3V3S	Z-diode	Triple, 3.1..3.5V, Zzt=95Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KRE	-	MMBZ5259BTS	Z-diode	Triple, 39V±5%, Izt=3.2mA, Zzt=80Ω, 200mW	SOT-363	33dd	-	7c	Di
KRF	-	BZX84C3V6S	Z-diode	Triple, 3.4..3.8V, Zzt=90Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KRF	-	MMBZ5233BTS	Z-diode	Triple, 6.0V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOT-363	33dd	-	7c	Di
KRG	-	BZX84C3V9S	Z-diode	Triple, 3.7..4.1V, Zzt=90Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KRG	-	MMBZ5238BTS	Z-diode	Triple, 8.7V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOT-363	33dd	-	7c	Di
KRH	-	BZX84C4V3S	Z-diode	Triple, 4.0..4.6V, Zzt=90Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7l	Di
KRH	-	MMBZ5255BTS	Z-diode	Triple, 28V±5%, Izt=4.5mA, Zzt=44Ω, 200mW	SOT-363	33dd	-	7c	Di

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KS	-	HN1J02FU	p-MOSFET	Dual, Sw, LogL, 20V, 50mA, 200mW, <40Ω(10mA), 0.15/0.13µs	US6	33	T14	7b	Tos
KS1	-	MMBZ5230BTS	Z-diode	Triple, 4.7V±5%, Izt=20mA, Zzt=19Ω, 200mW	SOT-363	33dd	-	7c	Di
KS2	-	MMBZ5231BTS	Z-diode	Triple, 5.1V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOT-363	33dd	-	7c	Di
KS3	-	MMBZ5232BTS	Z-diode	Triple, 5.6V±5%, Izt=20mA, Zzt=11Ω, 200mW	SOT-363	33dd	-	7c	Di
KS4	-	MMBZ5234BTS	Z-diode	Triple, 6.2V±5%, Izt=20mA, Zzt=7Ω, 200mW	SOT-363	33dd	-	7c	Di
KS5	-	MMBZ5235BTS	Z-diode	Triple, 6.8V±5%, Izt=20mA, Zzt=5Ω, 200mW	SOT-363	33dd	-	7c	Di
KS6	-	MMBZ5236BTS	Z-diode	Triple, 7.5V±5%, Izt=20mA, Zzt=6Ω, 200mW	SOT-363	33dd	-	7c	Di
KS7	-	MMBZ5237BTS	Z-diode	Triple, 8.2V±5%, Izt=20mA, Zzt=8Ω, 200mW	SOT-363	33dd	-	7c	Di
KS8	-	MMBZ5239BTS	Z-diode	Triple, 9.1V±5%, Izt=20mA, Zzt=10Ω, 200mW	SOT-363	33dd	-	7c	Di
KS9	-	MMBZ5240BTS	Z-diode	Triple, 10V±5%, Izt=20mA, Zzt=17Ω, 200mW	SOT-363	33dd	-	7c	Di
KSB	-	MMBZ5221BTS	Z-diode	Triple, 2.4V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-363	33dd	-	7c	Di
KSC	-	MMBZ5223BTS	Z-diode	Triple, 2.7V±5%, Izt=20mA, Zzt=30Ω, 200mW	SOT-363	33dd	-	7c	Di
KSD	-	MMBZ5225BTS	Z-diode	Triple, 3.0V±5%, Izt=20mA, Zzt=29Ω, 200mW	SOT-363	33dd	-	7c	Di
KSE	-	MMBZ5226BTS	Z-diode	Triple, 3.3V±5%, Izt=20mA, Zzt=28Ω, 200mW	SOT-363	33dd	-	7c	Di
KSF	-	MMBZ5227BTS	Z-diode	Triple, 3.6V±5%, Izt=20mA, Zzt=24Ω, 200mW	SOT-363	33dd	-	7c	Di
KSG	-	MMBZ5228BTS	Z-diode	Triple, 3.9V±5%, Izt=20mA, Zzt=23Ω, 200mW	SOT-363	33dd	-	7c	Di
KSH	-	MMBZ5229BTS	Z-diode	Triple, 4.3V±5%, Izt=20mA, Zzt=22Ω, 200mW	SOT-363	33dd	-	7c	Di
KSU	-	SD103ASDM	Si-diode	Quad, SBD, Sw, 40V, 350mA, 50pF, 10ns	SOT-26	33	D10	7k	Di
KT	-	R5426D122CD	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.22V	SON-6	xk	VBM1	7g	Ric
KT	-	R5426N122CD	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.22V	SOT-23-6	xk	VBM1	7da	Ric
KU	-	R5426D102DA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.02V	SON-6	xk	VBM1	7g	Ric
KU	-	R5426N102DA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.02V	SOT-23-6	xk	VBM1	7da	Ric
KV	-	R5426D110FD	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.1V	SON-6	xk	VBM1	7g	Ric
KV	-	R5426N110FD	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.11V	SOT-23-6	xk	VBM1	7da	Ric
KV7	-	TBZ363C20V8	Z-diode	Triple, 20V±5%, 200mW, Bidir.	SOT-363	33dy	-	7k	Di
KW	-	DDZX13BTS	Z-diode	Triple, 13V ±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
KW	-	R5426D112FD	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.12V	SON-6	xk	VBM1	7g	Ric
KW	-	R5426N112FD	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.12V	SOT-23-6	xk	VBM1	7da	Ric
KX	-	R5426D111DD	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.11V	SON-6	xk	VBM1	7g	Ric
KX	-	R5426N111DD	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.11V	SOT-23-6	xk	VBM1	7da	Ric
KX1212	-	LC1760CB6ATR1212	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1213	-	LC1760CB6ATR1213	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1214	-	LC1760CB6ATR1214	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1215	-	LC1760CB6ATR1215	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1216	-	LC1760CB6ATR1216	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1216	-	LC1760CB6BTR1216	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1217	-	LC1760CB6ATR1217	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1217	-	LC1760CB6BTR1217	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1218	-	LC1760CB6ATR1218	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1218	-	LC1760CB6BTR1218	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1219	-	LC1760CB6ATR1219	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1219	-	LC1760CB6BTR1219	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1220	-	LC1760CB6ATR1220	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1220	-	LC1760CB6BTR1220	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1221	-	LC1760CB6ATR1221	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1221	-	LC1760CB6BTR1221	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1222	-	LC1760CB6ATR1222	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1222	-	LC1760CB6BTR1222	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1223	-	LC1760CB6ATR1223	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1223	-	LC1760CB6BTR1223	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1224	-	LC1760CB6ATR1224	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1224	-	LC1760CB6BTR1224	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1225	-	LC1760CB6ATR1225	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1225	-	LC1760CB6BTR1225	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1226	-	LC1760CB6ATR1226	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1226	-	LC1760CB6BTR1226	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1227	-	LC1760CB6ATR1227	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1227	-	LC1760CB6BTR1227	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1228	-	LC1760CB6ATR1228	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1228	-	LC1760CB6BTR1228	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1229	-	LC1760CB6ATR1229	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1229	-	LC1760CB6BTR1229	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1230	-	LC1760CB6ATR1230	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1230	-	LC1760CB6BTR1230	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1231	-	LC1760CB6ATR1231	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1231	-	LC1760CB6BTR1231	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1232	-	LC1760CB6ATR1232	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1232	-	LC1760CB6BTR1232	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1233	-	LC1760CB6ATR1233	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1233	-	LC1760CB6BTR1233	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX1234	-	LC1760CB6ATR1234	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1234	-	LC1760CB6BTR1234	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1235	-	LC1760CB6ATR1235	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1235	-	LC1760CB6BTR1235	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1236	-	LC1760CB6ATR1236	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1236	-	LC1760CB6BTR1236	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1237	-	LC1760CB6ATR1237	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1237	-	LC1760CB6BTR1237	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1238	-	LC1760CB6ATR1238	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1238	-	LC1760CB6BTR1238	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1239	-	LC1760CB6ATR1239	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1239	-	LC1760CB6BTR1239	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1240	-	LC1760CB6ATR1240	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1240	-	LC1760CB6BTR1240	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1241	-	LC1760CB6ATR1241	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1241	-	LC1760CB6BTR1241	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1242	-	LC1760CB6ATR1242	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1242	-	LC1760CB6BTR1242	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1243	-	LC1760CB6ATR1243	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1243	-	LC1760CB6BTR1243	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1244	-	LC1760CB6ATR1244	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1244	-	LC1760CB6BTR1244	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1245	-	LC1760CB6ATR1245	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1245	-	LC1760CB6BTR1245	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1246	-	LC1760CB6ATR1246	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1246	-	LC1760CB6BTR1246	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1247	-	LC1760CB6ATR1247	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1247	-	LC1760CB6BTR1247	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1248	-	LC1760CB6ATR1248	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1248	-	LC1760CB6BTR1248	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1249	-	LC1760CB6ATR1249	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1249	-	LC1760CB6BTR1249	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1250	-	LC1760CB6ATR1250	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1250	-	LC1760CB6BTR1250	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1312	-	LC1760CB6ATR1312	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1312	-	LC1760CB6BTR1312	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1313	-	LC1760CB6ATR1313	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1313	-	LC1760CB6BTR1313	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1314	-	LC1760CB6ATR1314	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1314	-	LC1760CB6BTR1314	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1315	-	LC1760CB6ATR1315	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1315	-	LC1760CB6BTR1315	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1316	-	LC1760CB6ATR1316	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1316	-	LC1760CB6BTR1316	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1317	-	LC1760CB6ATR1317	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1317	-	LC1760CB6BTR1317	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1318	-	LC1760CB6ATR1318	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1318	-	LC1760CB6BTR1318	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1319	-	LC1760CB6ATR1319	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1319	-	LC1760CB6BTR1319	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1320	-	LC1760CB6ATR1320	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1320	-	LC1760CB6BTR1320	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1321	-	LC1760CB6ATR1321	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1321	-	LC1760CB6BTR1321	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1322	-	LC1760CB6ATR1322	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1322	-	LC1760CB6BTR1322	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1323	-	LC1760CB6ATR1323	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1323	-	LC1760CB6BTR1323	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1324	-	LC1760CB6ATR1324	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1324	-	LC1760CB6BTR1324	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1325	-	LC1760CB6ATR1325	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1325	-	LC1760CB6BTR1325	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1326	-	LC1760CB6ATR1326	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1326	-	LC1760CB6BTR1326	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1327	-	LC1760CB6ATR1327	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1327	-	LC1760CB6BTR1327	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1328	-	LC1760CB6ATR1328	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1328	-	LC1760CB6BTR1328	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1329	-	LC1760CB6ATR1329	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1329	-	LC1760CB6BTR1329	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX1330	-	LC1760CB6ATR1330	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1330	-	LC1760CB6BTR1330	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1331	-	LC1760CB6ATR1331	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1331	-	LC1760CB6BTR1331	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1332	-	LC1760CB6ATR1332	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1332	-	LC1760CB6BTR1332	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1333	-	LC1760CB6ATR1333	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1333	-	LC1760CB6BTR1333	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1334	-	LC1760CB6ATR1334	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1334	-	LC1760CB6BTR1334	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1335	-	LC1760CB6ATR1335	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1335	-	LC1760CB6BTR1335	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1336	-	LC1760CB6ATR1336	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1336	-	LC1760CB6BTR1336	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1337	-	LC1760CB6ATR1337	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1337	-	LC1760CB6BTR1337	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1338	-	LC1760CB6ATR1338	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1338	-	LC1760CB6BTR1338	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1339	-	LC1760CB6ATR1339	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1339	-	LC1760CB6BTR1339	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1340	-	LC1760CB6ATR1340	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1340	-	LC1760CB6BTR1340	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1341	-	LC1760CB6ATR1341	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1341	-	LC1760CB6BTR1341	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1342	-	LC1760CB6ATR1342	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1342	-	LC1760CB6BTR1342	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1343	-	LC1760CB6ATR1343	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1343	-	LC1760CB6BTR1343	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1344	-	LC1760CB6ATR1344	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1344	-	LC1760CB6BTR1344	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1345	-	LC1760CB6ATR1345	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1345	-	LC1760CB6BTR1345	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1346	-	LC1760CB6ATR1346	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1346	-	LC1760CB6BTR1346	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1347	-	LC1760CB6ATR1347	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1347	-	LC1760CB6BTR1347	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1348	-	LC1760CB6ATR1348	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1348	-	LC1760CB6BTR1348	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1349	-	LC1760CB6ATR1349	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1349	-	LC1760CB6BTR1349	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1350	-	LC1760CB6ATR1350	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1350	-	LC1760CB6BTR1350	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1412	-	LC1760CB6ATR1412	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1412	-	LC1760CB6BTR1412	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1413	-	LC1760CB6ATR1413	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1413	-	LC1760CB6BTR1413	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1414	-	LC1760CB6ATR1414	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1414	-	LC1760CB6BTR1414	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1415	-	LC1760CB6ATR1415	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1415	-	LC1760CB6BTR1415	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1416	-	LC1760CB6ATR1416	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1416	-	LC1760CB6BTR1416	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1417	-	LC1760CB6ATR1417	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1417	-	LC1760CB6BTR1417	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1418	-	LC1760CB6ATR1418	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1418	-	LC1760CB6BTR1418	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1419	-	LC1760CB6ATR1419	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1419	-	LC1760CB6BTR1419	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1420	-	LC1760CB6ATR1420	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1420	-	LC1760CB6BTR1420	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1421	-	LC1760CB6ATR1421	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1421	-	LC1760CB6BTR1421	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1422	-	LC1760CB6ATR1422	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1422	-	LC1760CB6BTR1422	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1423	-	LC1760CB6ATR1423	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1423	-	LC1760CB6BTR1423	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1424	-	LC1760CB6ATR1424	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1424	-	LC1760CB6BTR1424	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1425	-	LC1760CB6ATR1425	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1425	-	LC1760CB6BTR1425	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX1426	-	LC1760CB6ATR1426	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1426	-	LC1760CB6BTR1426	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1427	-	LC1760CB6ATR1427	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1427	-	LC1760CB6BTR1427	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1428	-	LC1760CB6ATR1428	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1428	-	LC1760CB6BTR1428	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1429	-	LC1760CB6ATR1429	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1429	-	LC1760CB6BTR1429	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1430	-	LC1760CB6ATR1430	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1430	-	LC1760CB6BTR1430	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1431	-	LC1760CB6ATR1431	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1431	-	LC1760CB6BTR1431	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1432	-	LC1760CB6ATR1432	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1432	-	LC1760CB6BTR1432	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1433	-	LC1760CB6ATR1433	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1433	-	LC1760CB6BTR1433	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1434	-	LC1760CB6ATR1434	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1434	-	LC1760CB6BTR1434	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1435	-	LC1760CB6ATR1435	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1435	-	LC1760CB6BTR1435	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1436	-	LC1760CB6ATR1436	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1436	-	LC1760CB6BTR1436	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1437	-	LC1760CB6ATR1437	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1437	-	LC1760CB6BTR1437	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1438	-	LC1760CB6ATR1438	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1438	-	LC1760CB6BTR1438	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1439	-	LC1760CB6ATR1439	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1439	-	LC1760CB6BTR1439	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1440	-	LC1760CB6ATR1440	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1440	-	LC1760CB6BTR1440	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1441	-	LC1760CB6ATR1441	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1441	-	LC1760CB6BTR1441	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1442	-	LC1760CB6ATR1442	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1442	-	LC1760CB6BTR1442	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1443	-	LC1760CB6ATR1443	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1443	-	LC1760CB6BTR1443	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1444	-	LC1760CB6ATR1444	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1444	-	LC1760CB6BTR1444	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1445	-	LC1760CB6ATR1445	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1445	-	LC1760CB6BTR1445	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1446	-	LC1760CB6ATR1446	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1446	-	LC1760CB6BTR1446	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1447	-	LC1760CB6ATR1447	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1447	-	LC1760CB6BTR1447	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1448	-	LC1760CB6ATR1448	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1448	-	LC1760CB6BTR1448	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1449	-	LC1760CB6ATR1449	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1449	-	LC1760CB6BTR1449	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1450	-	LC1760CB6ATR1450	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1450	-	LC1760CB6BTR1450	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1512	-	LC1760CB6ATR1512	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1512	-	LC1760CB6BTR1512	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1513	-	LC1760CB6ATR1513	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1513	-	LC1760CB6BTR1513	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1514	-	LC1760CB6ATR1514	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1514	-	LC1760CB6BTR1514	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1515	-	LC1760CB6ATR1515	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1515	-	LC1760CB6BTR1515	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1516	-	LC1760CB6ATR1516	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1516	-	LC1760CB6BTR1516	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1517	-	LC1760CB6ATR1517	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1517	-	LC1760CB6BTR1517	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1518	-	LC1760CB6ATR1518	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1518	-	LC1760CB6BTR1518	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1519	-	LC1760CB6ATR1519	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1519	-	LC1760CB6BTR1519	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1520	-	LC1760CB6ATR1520	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1520	-	LC1760CB6BTR1520	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1521	-	LC1760CB6ATR1521	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1521	-	LC1760CB6BTR1521	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX1522	-	LC1760CB6ATR1522	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1522	-	LC1760CB6BTR1522	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1523	-	LC1760CB6ATR1523	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1523	-	LC1760CB6BTR1523	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1524	-	LC1760CB6ATR1524	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1524	-	LC1760CB6BTR1524	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1525	-	LC1760CB6ATR1525	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1525	-	LC1760CB6BTR1525	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1526	-	LC1760CB6ATR1526	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1526	-	LC1760CB6BTR1526	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1527	-	LC1760CB6ATR1527	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1527	-	LC1760CB6BTR1527	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1528	-	LC1760CB6ATR1528	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1528	-	LC1760CB6BTR1528	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1529	-	LC1760CB6ATR1529	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1529	-	LC1760CB6BTR1529	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1530	-	LC1760CB6ATR1530	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1530	-	LC1760CB6BTR1530	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1531	-	LC1760CB6ATR1531	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1531	-	LC1760CB6BTR1531	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1532	-	LC1760CB6ATR1532	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1532	-	LC1760CB6BTR1532	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1533	-	LC1760CB6ATR1533	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1533	-	LC1760CB6BTR1533	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1534	-	LC1760CB6ATR1534	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1534	-	LC1760CB6BTR1534	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1535	-	LC1760CB6ATR1535	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1535	-	LC1760CB6BTR1535	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1536	-	LC1760CB6ATR1536	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1536	-	LC1760CB6BTR1536	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1537	-	LC1760CB6ATR1537	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1537	-	LC1760CB6BTR1537	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1538	-	LC1760CB6ATR1538	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1538	-	LC1760CB6BTR1538	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1539	-	LC1760CB6ATR1539	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1539	-	LC1760CB6BTR1539	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1540	-	LC1760CB6ATR1540	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1540	-	LC1760CB6BTR1540	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1541	-	LC1760CB6ATR1541	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1541	-	LC1760CB6BTR1541	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1542	-	LC1760CB6ATR1542	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1542	-	LC1760CB6BTR1542	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1543	-	LC1760CB6ATR1543	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1543	-	LC1760CB6BTR1543	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1544	-	LC1760CB6ATR1544	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1544	-	LC1760CB6BTR1544	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1545	-	LC1760CB6ATR1545	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1545	-	LC1760CB6BTR1545	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1546	-	LC1760CB6ATR1546	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1546	-	LC1760CB6BTR1546	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1547	-	LC1760CB6ATR1547	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1547	-	LC1760CB6BTR1547	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1548	-	LC1760CB6ATR1548	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1548	-	LC1760CB6BTR1548	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1549	-	LC1760CB6ATR1549	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1549	-	LC1760CB6BTR1549	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1550	-	LC1760CB6ATR1550	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1550	-	LC1760CB6BTR1550	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1612	-	LC1760CB6ATR1612	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1612	-	LC1760CB6BTR1612	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1613	-	LC1760CB6ATR1613	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1613	-	LC1760CB6BTR1613	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1614	-	LC1760CB6ATR1614	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1614	-	LC1760CB6BTR1614	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1615	-	LC1760CB6ATR1615	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1615	-	LC1760CB6BTR1615	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1616	-	LC1760CB6ATR1616	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1616	-	LC1760CB6BTR1616	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1617	-	LC1760CB6ATR1617	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1617	-	LC1760CB6BTR1617	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX1618	-	LC1760CB6ATR1618	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1618	-	LC1760CB6BTR1618	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1619	-	LC1760CB6ATR1619	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1619	-	LC1760CB6BTR1619	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1620	-	LC1760CB6ATR1620	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1620	-	LC1760CB6BTR1620	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1621	-	LC1760CB6ATR1621	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1621	-	LC1760CB6BTR1621	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1622	-	LC1760CB6ATR1622	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1622	-	LC1760CB6BTR1622	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1623	-	LC1760CB6ATR1623	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1623	-	LC1760CB6BTR1623	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1624	-	LC1760CB6ATR1624	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1624	-	LC1760CB6BTR1624	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1625	-	LC1760CB6ATR1625	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1625	-	LC1760CB6BTR1625	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1626	-	LC1760CB6ATR1626	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1626	-	LC1760CB6BTR1626	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1627	-	LC1760CB6ATR1627	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1627	-	LC1760CB6BTR1627	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1628	-	LC1760CB6ATR1628	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1628	-	LC1760CB6BTR1628	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1629	-	LC1760CB6ATR1629	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1629	-	LC1760CB6BTR1629	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1630	-	LC1760CB6ATR1630	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1630	-	LC1760CB6BTR1630	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1631	-	LC1760CB6ATR1631	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1631	-	LC1760CB6BTR1631	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1632	-	LC1760CB6ATR1632	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1632	-	LC1760CB6BTR1632	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1633	-	LC1760CB6ATR1633	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1633	-	LC1760CB6BTR1633	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1634	-	LC1760CB6ATR1634	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1634	-	LC1760CB6BTR1634	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1635	-	LC1760CB6ATR1635	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1635	-	LC1760CB6BTR1635	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1636	-	LC1760CB6ATR1636	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1636	-	LC1760CB6BTR1636	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1637	-	LC1760CB6ATR1637	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1637	-	LC1760CB6BTR1637	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1638	-	LC1760CB6ATR1638	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1638	-	LC1760CB6BTR1638	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1639	-	LC1760CB6ATR1639	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1639	-	LC1760CB6BTR1639	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1640	-	LC1760CB6ATR1640	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1640	-	LC1760CB6BTR1640	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1641	-	LC1760CB6ATR1641	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1641	-	LC1760CB6BTR1641	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1642	-	LC1760CB6ATR1642	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1642	-	LC1760CB6BTR1642	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1643	-	LC1760CB6ATR1643	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1643	-	LC1760CB6BTR1643	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1644	-	LC1760CB6ATR1644	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1644	-	LC1760CB6BTR1644	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1645	-	LC1760CB6ATR1645	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1645	-	LC1760CB6BTR1645	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1646	-	LC1760CB6ATR1646	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1646	-	LC1760CB6BTR1646	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1647	-	LC1760CB6ATR1647	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1647	-	LC1760CB6BTR1647	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1648	-	LC1760CB6ATR1648	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1648	-	LC1760CB6BTR1648	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1649	-	LC1760CB6ATR1649	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1649	-	LC1760CB6BTR1649	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1650	-	LC1760CB6ATR1650	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1650	-	LC1760CB6BTR1650	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1712	-	LC1760CB6ATR1712	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1712	-	LC1760CB6BTR1712	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1713	-	LC1760CB6ATR1713	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1713	-	LC1760CB6BTR1713	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX1714	-	LC1760CB6ATR1714	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1714	-	LC1760CB6BTR1714	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1715	-	LC1760CB6ATR1715	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1715	-	LC1760CB6BTR1715	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1716	-	LC1760CB6ATR1716	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1716	-	LC1760CB6BTR1716	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1717	-	LC1760CB6ATR1717	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1717	-	LC1760CB6BTR1717	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1718	-	LC1760CB6ATR1718	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1718	-	LC1760CB6BTR1718	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1719	-	LC1760CB6ATR1719	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1719	-	LC1760CB6BTR1719	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1720	-	LC1760CB6ATR1720	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1720	-	LC1760CB6BTR1720	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1721	-	LC1760CB6ATR1721	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1721	-	LC1760CB6BTR1721	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1722	-	LC1760CB6ATR1722	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1722	-	LC1760CB6BTR1722	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1723	-	LC1760CB6ATR1723	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1723	-	LC1760CB6BTR1723	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1724	-	LC1760CB6ATR1724	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1724	-	LC1760CB6BTR1724	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1725	-	LC1760CB6ATR1725	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1725	-	LC1760CB6BTR1725	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1726	-	LC1760CB6ATR1726	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1726	-	LC1760CB6BTR1726	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1727	-	LC1760CB6ATR1727	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1727	-	LC1760CB6BTR1727	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1728	-	LC1760CB6ATR1728	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1728	-	LC1760CB6BTR1728	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1729	-	LC1760CB6ATR1729	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1729	-	LC1760CB6BTR1729	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1730	-	LC1760CB6ATR1730	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1730	-	LC1760CB6BTR1730	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1731	-	LC1760CB6ATR1731	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1731	-	LC1760CB6BTR1731	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1732	-	LC1760CB6ATR1732	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1732	-	LC1760CB6BTR1732	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1733	-	LC1760CB6ATR1733	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1733	-	LC1760CB6BTR1733	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1734	-	LC1760CB6ATR1734	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1734	-	LC1760CB6BTR1734	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1735	-	LC1760CB6ATR1735	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1735	-	LC1760CB6BTR1735	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1736	-	LC1760CB6ATR1736	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1736	-	LC1760CB6BTR1736	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1737	-	LC1760CB6ATR1737	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1737	-	LC1760CB6BTR1737	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1738	-	LC1760CB6ATR1738	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1738	-	LC1760CB6BTR1738	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1739	-	LC1760CB6ATR1739	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1739	-	LC1760CB6BTR1739	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1740	-	LC1760CB6ATR1740	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1740	-	LC1760CB6BTR1740	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1741	-	LC1760CB6ATR1741	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1741	-	LC1760CB6BTR1741	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1742	-	LC1760CB6ATR1742	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1742	-	LC1760CB6BTR1742	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1743	-	LC1760CB6ATR1743	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1743	-	LC1760CB6BTR1743	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1744	-	LC1760CB6ATR1744	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1744	-	LC1760CB6BTR1744	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1745	-	LC1760CB6ATR1745	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1745	-	LC1760CB6BTR1745	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1746	-	LC1760CB6ATR1746	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1746	-	LC1760CB6BTR1746	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1747	-	LC1760CB6ATR1747	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1747	-	LC1760CB6BTR1747	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1748	-	LC1760CB6ATR1748	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1748	-	LC1760CB6BTR1748	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX1749	-	LC1760CB6ATR1749	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1749	-	LC1760CB6BTR1749	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1750	-	LC1760CB6ATR1750	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1750	-	LC1760CB6BTR1750	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1812	-	LC1760CB6ATR1812	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1812	-	LC1760CB6BTR1812	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1813	-	LC1760CB6ATR1813	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1813	-	LC1760CB6BTR1813	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1814	-	LC1760CB6ATR1814	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1814	-	LC1760CB6BTR1814	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1815	-	LC1760CB6ATR1815	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1815	-	LC1760CB6BTR1815	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1816	-	LC1760CB6ATR1816	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1816	-	LC1760CB6BTR1816	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1817	-	LC1760CB6ATR1817	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1817	-	LC1760CB6BTR1817	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1818	-	LC1760CB6ATR1818	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1818	-	LC1760CB6BTR1818	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1819	-	LC1760CB6ATR1819	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1819	-	LC1760CB6BTR1819	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1820	-	LC1760CB6ATR1820	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1820	-	LC1760CB6BTR1820	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1821	-	LC1760CB6ATR1821	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1821	-	LC1760CB6BTR1821	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1822	-	LC1760CB6ATR1822	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1822	-	LC1760CB6BTR1822	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1823	-	LC1760CB6ATR1823	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1823	-	LC1760CB6BTR1823	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1824	-	LC1760CB6ATR1824	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1824	-	LC1760CB6BTR1824	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1825	-	LC1760CB6ATR1825	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1825	-	LC1760CB6BTR1825	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1826	-	LC1760CB6ATR1826	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1826	-	LC1760CB6BTR1826	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1827	-	LC1760CB6ATR1827	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1827	-	LC1760CB6BTR1827	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1828	-	LC1760CB6ATR1828	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1828	-	LC1760CB6BTR1828	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1829	-	LC1760CB6ATR1829	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1829	-	LC1760CB6BTR1829	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1830	-	LC1760CB6ATR1830	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1830	-	LC1760CB6BTR1830	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1831	-	LC1760CB6ATR1831	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1831	-	LC1760CB6BTR1831	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1832	-	LC1760CB6ATR1832	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1832	-	LC1760CB6BTR1832	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1833	-	LC1760CB6ATR1833	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1833	-	LC1760CB6BTR1833	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1834	-	LC1760CB6ATR1834	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1834	-	LC1760CB6BTR1834	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1835	-	LC1760CB6ATR1835	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1835	-	LC1760CB6BTR1835	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1836	-	LC1760CB6ATR1836	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1836	-	LC1760CB6BTR1836	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1837	-	LC1760CB6ATR1837	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1837	-	LC1760CB6BTR1837	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1838	-	LC1760CB6ATR1838	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1838	-	LC1760CB6BTR1838	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1839	-	LC1760CB6ATR1839	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1839	-	LC1760CB6BTR1839	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1840	-	LC1760CB6ATR1840	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1840	-	LC1760CB6BTR1840	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1841	-	LC1760CB6ATR1841	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1841	-	LC1760CB6BTR1841	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1842	-	LC1760CB6ATR1842	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1842	-	LC1760CB6BTR1842	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1843	-	LC1760CB6ATR1843	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1843	-	LC1760CB6BTR1843	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1844	-	LC1760CB6ATR1844	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1844	-	LC1760CB6BTR1844	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX1845	-	LC1760CB6ATR1845	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1845	-	LC1760CB6BTR1845	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1846	-	LC1760CB6ATR1846	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1846	-	LC1760CB6BTR1846	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1847	-	LC1760CB6ATR1847	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1847	-	LC1760CB6BTR1847	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1848	-	LC1760CB6ATR1848	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1848	-	LC1760CB6BTR1848	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1849	-	LC1760CB6ATR1849	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1849	-	LC1760CB6BTR1849	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1850	-	LC1760CB6ATR1850	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1850	-	LC1760CB6BTR1850	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1912	-	LC1760CB6ATR1912	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1912	-	LC1760CB6BTR1912	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1913	-	LC1760CB6ATR1913	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1913	-	LC1760CB6BTR1913	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1914	-	LC1760CB6ATR1914	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1914	-	LC1760CB6BTR1914	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1915	-	LC1760CB6ATR1915	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1915	-	LC1760CB6BTR1915	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1916	-	LC1760CB6ATR1916	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1916	-	LC1760CB6BTR1916	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1917	-	LC1760CB6ATR1917	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1917	-	LC1760CB6BTR1917	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1918	-	LC1760CB6ATR1918	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1918	-	LC1760CB6BTR1918	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1919	-	LC1760CB6ATR1919	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1919	-	LC1760CB6BTR1919	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1920	-	LC1760CB6ATR1920	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1920	-	LC1760CB6BTR1920	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1921	-	LC1760CB6ATR1921	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1921	-	LC1760CB6BTR1921	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1922	-	LC1760CB6ATR1922	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1922	-	LC1760CB6BTR1922	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1923	-	LC1760CB6ATR1923	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1923	-	LC1760CB6BTR1923	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1924	-	LC1760CB6ATR1924	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1924	-	LC1760CB6BTR1924	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1925	-	LC1760CB6ATR1925	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1925	-	LC1760CB6BTR1925	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1926	-	LC1760CB6ATR1926	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1926	-	LC1760CB6BTR1926	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1927	-	LC1760CB6ATR1927	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1927	-	LC1760CB6BTR1927	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1928	-	LC1760CB6ATR1928	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1928	-	LC1760CB6BTR1928	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1929	-	LC1760CB6ATR1929	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1929	-	LC1760CB6BTR1929	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1930	-	LC1760CB6ATR1930	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1930	-	LC1760CB6BTR1930	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1931	-	LC1760CB6ATR1931	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1931	-	LC1760CB6BTR1931	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1932	-	LC1760CB6ATR1932	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1932	-	LC1760CB6BTR1932	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1933	-	LC1760CB6ATR1933	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1933	-	LC1760CB6BTR1933	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1934	-	LC1760CB6ATR1934	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1934	-	LC1760CB6BTR1934	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1935	-	LC1760CB6ATR1935	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1935	-	LC1760CB6BTR1935	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1936	-	LC1760CB6ATR1936	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1936	-	LC1760CB6BTR1936	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1937	-	LC1760CB6ATR1937	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1937	-	LC1760CB6BTR1937	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1938	-	LC1760CB6ATR1938	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1938	-	LC1760CB6BTR1938	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1939	-	LC1760CB6ATR1939	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1939	-	LC1760CB6BTR1939	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1940	-	LC1760CB6ATR1940	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1940	-	LC1760CB6BTR1940	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX1941	-	LC1760CB6ATR1941	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1941	-	LC1760CB6BTR1941	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1942	-	LC1760CB6ATR1942	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1942	-	LC1760CB6BTR1942	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1943	-	LC1760CB6ATR1943	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1943	-	LC1760CB6BTR1943	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1944	-	LC1760CB6ATR1944	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1944	-	LC1760CB6BTR1944	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1945	-	LC1760CB6ATR1945	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1945	-	LC1760CB6BTR1945	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1946	-	LC1760CB6ATR1946	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1946	-	LC1760CB6BTR1946	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1947	-	LC1760CB6ATR1947	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1947	-	LC1760CB6BTR1947	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1948	-	LC1760CB6ATR1948	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1948	-	LC1760CB6BTR1948	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1949	-	LC1760CB6ATR1949	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1949	-	LC1760CB6BTR1949	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX1950	-	LC1760CB6ATR1950	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX1950	-	LC1760CB6BTR1950	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2012	-	LC1760CB6ATR2012	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2012	-	LC1760CB6BTR2012	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2013	-	LC1760CB6ATR2013	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2013	-	LC1760CB6BTR2013	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2014	-	LC1760CB6ATR2014	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2014	-	LC1760CB6BTR2014	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2015	-	LC1760CB6ATR2015	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2015	-	LC1760CB6BTR2015	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2016	-	LC1760CB6ATR2016	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2016	-	LC1760CB6BTR2016	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2017	-	LC1760CB6ATR2017	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2017	-	LC1760CB6BTR2017	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2018	-	LC1760CB6ATR2018	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2018	-	LC1760CB6BTR2018	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2019	-	LC1760CB6ATR2019	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2019	-	LC1760CB6BTR2019	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2020	-	LC1760CB6ATR2020	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2020	-	LC1760CB6BTR2020	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2021	-	LC1760CB6ATR2021	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2021	-	LC1760CB6BTR2021	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2022	-	LC1760CB6ATR2022	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2022	-	LC1760CB6BTR2022	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2023	-	LC1760CB6ATR2023	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2023	-	LC1760CB6BTR2023	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2024	-	LC1760CB6ATR2024	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2024	-	LC1760CB6BTR2024	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2025	-	LC1760CB6ATR2025	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2025	-	LC1760CB6BTR2025	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2026	-	LC1760CB6ATR2026	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2026	-	LC1760CB6BTR2026	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2027	-	LC1760CB6ATR2027	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2027	-	LC1760CB6BTR2027	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2028	-	LC1760CB6ATR2028	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2028	-	LC1760CB6BTR2028	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2029	-	LC1760CB6ATR2029	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2029	-	LC1760CB6BTR2029	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2030	-	LC1760CB6ATR2030	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2030	-	LC1760CB6BTR2030	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2031	-	LC1760CB6ATR2031	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2031	-	LC1760CB6BTR2031	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2032	-	LC1760CB6ATR2032	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2032	-	LC1760CB6BTR2032	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2033	-	LC1760CB6ATR2033	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2033	-	LC1760CB6BTR2033	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2034	-	LC1760CB6ATR2034	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2034	-	LC1760CB6BTR2034	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2035	-	LC1760CB6ATR2035	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2035	-	LC1760CB6BTR2035	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2036	-	LC1760CB6ATR2036	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2036	-	LC1760CB6BTR2036	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX2037	-	LC1760CB6ATR2037	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2037	-	LC1760CB6BTR2037	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2038	-	LC1760CB6ATR2038	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2038	-	LC1760CB6BTR2038	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2039	-	LC1760CB6ATR2039	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2039	-	LC1760CB6BTR2039	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2040	-	LC1760CB6ATR2040	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2040	-	LC1760CB6BTR2040	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2041	-	LC1760CB6ATR2041	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2041	-	LC1760CB6BTR2041	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2042	-	LC1760CB6ATR2042	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2042	-	LC1760CB6BTR2042	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2043	-	LC1760CB6ATR2043	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2043	-	LC1760CB6BTR2043	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2044	-	LC1760CB6ATR2044	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2044	-	LC1760CB6BTR2044	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2045	-	LC1760CB6ATR2045	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2045	-	LC1760CB6BTR2045	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2046	-	LC1760CB6ATR2046	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2046	-	LC1760CB6BTR2046	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2047	-	LC1760CB6ATR2047	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2047	-	LC1760CB6BTR2047	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2048	-	LC1760CB6ATR2048	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2048	-	LC1760CB6BTR2048	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2049	-	LC1760CB6ATR2049	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2049	-	LC1760CB6BTR2049	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2050	-	LC1760CB6ATR2050	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2050	-	LC1760CB6BTR2050	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2112	-	LC1760CB6ATR2112	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2112	-	LC1760CB6BTR2112	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2113	-	LC1760CB6ATR2113	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2113	-	LC1760CB6BTR2113	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2114	-	LC1760CB6ATR2114	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2114	-	LC1760CB6BTR2114	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2115	-	LC1760CB6ATR2115	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2115	-	LC1760CB6BTR2115	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2116	-	LC1760CB6ATR2116	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2116	-	LC1760CB6BTR2116	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2117	-	LC1760CB6ATR2117	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2117	-	LC1760CB6BTR2117	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2118	-	LC1760CB6ATR2118	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2118	-	LC1760CB6BTR2118	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2119	-	LC1760CB6ATR2119	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2119	-	LC1760CB6BTR2119	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2120	-	LC1760CB6ATR2120	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2120	-	LC1760CB6BTR2120	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2121	-	LC1760CB6ATR2121	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2121	-	LC1760CB6BTR2121	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2122	-	LC1760CB6ATR2122	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2122	-	LC1760CB6BTR2122	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2123	-	LC1760CB6ATR2123	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2123	-	LC1760CB6BTR2123	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2124	-	LC1760CB6ATR2124	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2124	-	LC1760CB6BTR2124	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2125	-	LC1760CB6ATR2125	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2125	-	LC1760CB6BTR2125	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2126	-	LC1760CB6ATR2126	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2126	-	LC1760CB6BTR2126	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2127	-	LC1760CB6ATR2127	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2127	-	LC1760CB6BTR2127	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2128	-	LC1760CB6ATR2128	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2128	-	LC1760CB6BTR2128	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2129	-	LC1760CB6ATR2129	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2129	-	LC1760CB6BTR2129	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2130	-	LC1760CB6ATR2130	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2130	-	LC1760CB6BTR2130	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2131	-	LC1760CB6ATR2131	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2131	-	LC1760CB6BTR2131	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2132	-	LC1760CB6ATR2132	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2132	-	LC1760CB6BTR2132	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX2133	-	LC1760CB6ATR2133	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2133	-	LC1760CB6BTR2133	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2134	-	LC1760CB6ATR2134	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2134	-	LC1760CB6BTR2134	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2135	-	LC1760CB6ATR2135	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2135	-	LC1760CB6BTR2135	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2136	-	LC1760CB6ATR2136	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2136	-	LC1760CB6BTR2136	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2137	-	LC1760CB6ATR2137	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2137	-	LC1760CB6BTR2137	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2138	-	LC1760CB6ATR2138	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2138	-	LC1760CB6BTR2138	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2139	-	LC1760CB6ATR2139	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2139	-	LC1760CB6BTR2139	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2140	-	LC1760CB6ATR2140	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2140	-	LC1760CB6BTR2140	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2141	-	LC1760CB6ATR2141	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2141	-	LC1760CB6BTR2141	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2142	-	LC1760CB6ATR2142	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2142	-	LC1760CB6BTR2142	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2143	-	LC1760CB6ATR2143	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2143	-	LC1760CB6BTR2143	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2144	-	LC1760CB6ATR2144	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2144	-	LC1760CB6BTR2144	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2145	-	LC1760CB6ATR2145	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2145	-	LC1760CB6BTR2145	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2146	-	LC1760CB6ATR2146	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2146	-	LC1760CB6BTR2146	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2147	-	LC1760CB6ATR2147	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2147	-	LC1760CB6BTR2147	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2148	-	LC1760CB6ATR2148	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2148	-	LC1760CB6BTR2148	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2149	-	LC1760CB6ATR2149	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2149	-	LC1760CB6BTR2149	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2150	-	LC1760CB6ATR2150	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2150	-	LC1760CB6BTR2150	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2212	-	LC1760CB6ATR2212	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2212	-	LC1760CB6BTR2212	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2213	-	LC1760CB6ATR2213	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2213	-	LC1760CB6BTR2213	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2214	-	LC1760CB6ATR2214	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2214	-	LC1760CB6BTR2214	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2215	-	LC1760CB6ATR2215	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2215	-	LC1760CB6BTR2215	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2216	-	LC1760CB6ATR2216	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2216	-	LC1760CB6BTR2216	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2217	-	LC1760CB6ATR2217	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2217	-	LC1760CB6BTR2217	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2218	-	LC1760CB6ATR2218	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2218	-	LC1760CB6BTR2218	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2219	-	LC1760CB6ATR2219	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2219	-	LC1760CB6BTR2219	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2220	-	LC1760CB6ATR2220	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2220	-	LC1760CB6BTR2220	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2221	-	LC1760CB6ATR2221	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2221	-	LC1760CB6BTR2221	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2222	-	LC1760CB6ATR2222	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2222	-	LC1760CB6BTR2222	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2223	-	LC1760CB6ATR2223	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2223	-	LC1760CB6BTR2223	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2224	-	LC1760CB6ATR2224	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2224	-	LC1760CB6BTR2224	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2225	-	LC1760CB6ATR2225	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2225	-	LC1760CB6BTR2225	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2226	-	LC1760CB6ATR2226	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2226	-	LC1760CB6BTR2226	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2227	-	LC1760CB6ATR2227	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2227	-	LC1760CB6BTR2227	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2228	-	LC1760CB6ATR2228	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2228	-	LC1760CB6BTR2228	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX2229	-	LC1760CB6ATR2229	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2229	-	LC1760CB6BTR2229	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2230	-	LC1760CB6ATR2230	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2230	-	LC1760CB6BTR2230	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2231	-	LC1760CB6ATR2231	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2231	-	LC1760CB6BTR2231	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2232	-	LC1760CB6ATR2232	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2232	-	LC1760CB6BTR2232	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2233	-	LC1760CB6ATR2233	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2233	-	LC1760CB6BTR2233	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2234	-	LC1760CB6ATR2234	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2234	-	LC1760CB6BTR2234	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2235	-	LC1760CB6ATR2235	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2235	-	LC1760CB6BTR2235	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2236	-	LC1760CB6ATR2236	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2236	-	LC1760CB6BTR2236	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2237	-	LC1760CB6ATR2237	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2237	-	LC1760CB6BTR2237	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2238	-	LC1760CB6ATR2238	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2238	-	LC1760CB6BTR2238	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2239	-	LC1760CB6ATR2239	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2239	-	LC1760CB6BTR2239	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2240	-	LC1760CB6ATR2240	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2240	-	LC1760CB6BTR2240	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2241	-	LC1760CB6ATR2241	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2241	-	LC1760CB6BTR2241	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2242	-	LC1760CB6ATR2242	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2242	-	LC1760CB6BTR2242	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2243	-	LC1760CB6ATR2243	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2243	-	LC1760CB6BTR2243	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2244	-	LC1760CB6ATR2244	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2244	-	LC1760CB6BTR2244	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2245	-	LC1760CB6ATR2245	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2245	-	LC1760CB6BTR2245	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2246	-	LC1760CB6ATR2246	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2246	-	LC1760CB6BTR2246	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2247	-	LC1760CB6ATR2247	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2247	-	LC1760CB6BTR2247	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2248	-	LC1760CB6ATR2248	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2248	-	LC1760CB6BTR2248	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2249	-	LC1760CB6ATR2249	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2249	-	LC1760CB6BTR2249	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2250	-	LC1760CB6ATR2250	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2250	-	LC1760CB6BTR2250	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2312	-	LC1760CB6ATR2312	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2312	-	LC1760CB6BTR2312	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2313	-	LC1760CB6ATR2313	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2313	-	LC1760CB6BTR2313	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2314	-	LC1760CB6ATR2314	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2314	-	LC1760CB6BTR2314	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2315	-	LC1760CB6ATR2315	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2315	-	LC1760CB6BTR2315	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2316	-	LC1760CB6ATR2316	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2316	-	LC1760CB6BTR2316	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2317	-	LC1760CB6ATR2317	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2317	-	LC1760CB6BTR2317	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2318	-	LC1760CB6ATR2318	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2318	-	LC1760CB6BTR2318	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2319	-	LC1760CB6ATR2319	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2319	-	LC1760CB6BTR2319	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2320	-	LC1760CB6ATR2320	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2320	-	LC1760CB6BTR2320	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2321	-	LC1760CB6ATR2321	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2321	-	LC1760CB6BTR2321	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2322	-	LC1760CB6ATR2322	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2322	-	LC1760CB6BTR2322	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2323	-	LC1760CB6ATR2323	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2323	-	LC1760CB6BTR2323	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2324	-	LC1760CB6ATR2324	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2324	-	LC1760CB6BTR2324	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX2325	-	LC1760CB6ATR2325	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2325	-	LC1760CB6BTR2325	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2326	-	LC1760CB6ATR2326	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2326	-	LC1760CB6BTR2326	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2327	-	LC1760CB6ATR2327	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2327	-	LC1760CB6BTR2327	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2328	-	LC1760CB6ATR2328	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2328	-	LC1760CB6BTR2328	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2329	-	LC1760CB6ATR2329	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2329	-	LC1760CB6BTR2329	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2330	-	LC1760CB6ATR2330	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2330	-	LC1760CB6BTR2330	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2331	-	LC1760CB6ATR2331	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2331	-	LC1760CB6BTR2331	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2332	-	LC1760CB6ATR2332	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2332	-	LC1760CB6BTR2332	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2333	-	LC1760CB6ATR2333	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2333	-	LC1760CB6BTR2333	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2334	-	LC1760CB6ATR2334	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2334	-	LC1760CB6BTR2334	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2335	-	LC1760CB6ATR2335	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2335	-	LC1760CB6BTR2335	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2336	-	LC1760CB6ATR2336	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2336	-	LC1760CB6BTR2336	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2337	-	LC1760CB6ATR2337	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2337	-	LC1760CB6BTR2337	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2338	-	LC1760CB6ATR2338	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2338	-	LC1760CB6BTR2338	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2339	-	LC1760CB6ATR2339	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2339	-	LC1760CB6BTR2339	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2340	-	LC1760CB6ATR2340	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2340	-	LC1760CB6BTR2340	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2341	-	LC1760CB6ATR2341	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2341	-	LC1760CB6BTR2341	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2342	-	LC1760CB6ATR2342	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2342	-	LC1760CB6BTR2342	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2343	-	LC1760CB6ATR2343	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2343	-	LC1760CB6BTR2343	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2344	-	LC1760CB6ATR2344	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2344	-	LC1760CB6BTR2344	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2345	-	LC1760CB6ATR2345	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2345	-	LC1760CB6BTR2345	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2346	-	LC1760CB6ATR2346	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2346	-	LC1760CB6BTR2346	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2347	-	LC1760CB6ATR2347	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2347	-	LC1760CB6BTR2347	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2348	-	LC1760CB6ATR2348	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2348	-	LC1760CB6BTR2348	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2349	-	LC1760CB6ATR2349	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2349	-	LC1760CB6BTR2349	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2350	-	LC1760CB6ATR2350	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2350	-	LC1760CB6BTR2350	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2412	-	LC1760CB6ATR2412	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2412	-	LC1760CB6BTR2412	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2413	-	LC1760CB6ATR2413	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2413	-	LC1760CB6BTR2413	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2414	-	LC1760CB6ATR2414	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2414	-	LC1760CB6BTR2414	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2415	-	LC1760CB6ATR2415	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2415	-	LC1760CB6BTR2415	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2416	-	LC1760CB6ATR2416	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2416	-	LC1760CB6BTR2416	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2417	-	LC1760CB6ATR2417	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2417	-	LC1760CB6BTR2417	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2418	-	LC1760CB6ATR2418	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2418	-	LC1760CB6BTR2418	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2419	-	LC1760CB6ATR2419	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2419	-	LC1760CB6BTR2419	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2420	-	LC1760CB6ATR2420	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2420	-	LC1760CB6BTR2420	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX2421	-	LC1760CB6ATR2421	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2421	-	LC1760CB6BTR2421	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2422	-	LC1760CB6ATR2422	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2422	-	LC1760CB6BTR2422	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2423	-	LC1760CB6ATR2423	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2423	-	LC1760CB6BTR2423	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2424	-	LC1760CB6ATR2424	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2424	-	LC1760CB6BTR2424	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2425	-	LC1760CB6ATR2425	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2425	-	LC1760CB6BTR2425	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2426	-	LC1760CB6ATR2426	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2426	-	LC1760CB6BTR2426	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2427	-	LC1760CB6ATR2427	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2427	-	LC1760CB6BTR2427	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2428	-	LC1760CB6ATR2428	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2428	-	LC1760CB6BTR2428	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2429	-	LC1760CB6ATR2429	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2429	-	LC1760CB6BTR2429	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2430	-	LC1760CB6ATR2430	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2430	-	LC1760CB6BTR2430	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2431	-	LC1760CB6ATR2431	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2431	-	LC1760CB6BTR2431	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2432	-	LC1760CB6ATR2432	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2432	-	LC1760CB6BTR2432	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2433	-	LC1760CB6ATR2433	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2433	-	LC1760CB6BTR2433	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2434	-	LC1760CB6ATR2434	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2434	-	LC1760CB6BTR2434	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2435	-	LC1760CB6ATR2435	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2435	-	LC1760CB6BTR2435	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2436	-	LC1760CB6ATR2436	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2436	-	LC1760CB6BTR2436	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2437	-	LC1760CB6ATR2437	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2437	-	LC1760CB6BTR2437	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2438	-	LC1760CB6ATR2438	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2438	-	LC1760CB6BTR2438	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2439	-	LC1760CB6ATR2439	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2439	-	LC1760CB6BTR2439	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2440	-	LC1760CB6ATR2440	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2440	-	LC1760CB6BTR2440	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2441	-	LC1760CB6ATR2441	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2441	-	LC1760CB6BTR2441	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2442	-	LC1760CB6ATR2442	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2442	-	LC1760CB6BTR2442	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2443	-	LC1760CB6ATR2443	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2443	-	LC1760CB6BTR2443	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2444	-	LC1760CB6ATR2444	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2444	-	LC1760CB6BTR2444	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2445	-	LC1760CB6ATR2445	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2445	-	LC1760CB6BTR2445	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2446	-	LC1760CB6ATR2446	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2446	-	LC1760CB6BTR2446	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2447	-	LC1760CB6ATR2447	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2447	-	LC1760CB6BTR2447	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2448	-	LC1760CB6ATR2448	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2448	-	LC1760CB6BTR2448	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2449	-	LC1760CB6ATR2449	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2449	-	LC1760CB6BTR2449	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2450	-	LC1760CB6ATR2450	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2450	-	LC1760CB6BTR2450	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2512	-	LC1760CB6ATR2512	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2512	-	LC1760CB6BTR2512	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2513	-	LC1760CB6ATR2513	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2513	-	LC1760CB6BTR2513	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2514	-	LC1760CB6ATR2514	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2514	-	LC1760CB6BTR2514	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2515	-	LC1760CB6ATR2515	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2515	-	LC1760CB6BTR2515	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2516	-	LC1760CB6ATR2516	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2516	-	LC1760CB6BTR2516	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX2517	-	LC1760CB6ATR2517	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2517	-	LC1760CB6BTR2517	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2518	-	LC1760CB6ATR2518	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2518	-	LC1760CB6BTR2518	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2519	-	LC1760CB6ATR2519	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2519	-	LC1760CB6BTR2519	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2520	-	LC1760CB6ATR2520	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2520	-	LC1760CB6BTR2520	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2521	-	LC1760CB6ATR2521	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2521	-	LC1760CB6BTR2521	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2522	-	LC1760CB6ATR2522	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2522	-	LC1760CB6BTR2522	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2523	-	LC1760CB6ATR2523	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2523	-	LC1760CB6BTR2523	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2524	-	LC1760CB6ATR2524	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2524	-	LC1760CB6BTR2524	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2525	-	LC1760CB6ATR2525	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2525	-	LC1760CB6BTR2525	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2526	-	LC1760CB6ATR2526	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2526	-	LC1760CB6BTR2526	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2527	-	LC1760CB6ATR2527	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2527	-	LC1760CB6BTR2527	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2528	-	LC1760CB6ATR2528	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2528	-	LC1760CB6BTR2528	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2529	-	LC1760CB6ATR2529	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2529	-	LC1760CB6BTR2529	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2530	-	LC1760CB6ATR2530	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2530	-	LC1760CB6BTR2530	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2531	-	LC1760CB6ATR2531	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2531	-	LC1760CB6BTR2531	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2532	-	LC1760CB6ATR2532	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2532	-	LC1760CB6BTR2532	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2533	-	LC1760CB6ATR2533	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2533	-	LC1760CB6BTR2533	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2534	-	LC1760CB6ATR2534	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2534	-	LC1760CB6BTR2534	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2535	-	LC1760CB6ATR2535	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2535	-	LC1760CB6BTR2535	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2536	-	LC1760CB6ATR2536	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2536	-	LC1760CB6BTR2536	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2537	-	LC1760CB6ATR2537	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2537	-	LC1760CB6BTR2537	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2538	-	LC1760CB6ATR2538	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2538	-	LC1760CB6BTR2538	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2539	-	LC1760CB6ATR2539	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2539	-	LC1760CB6BTR2539	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2540	-	LC1760CB6ATR2540	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2540	-	LC1760CB6BTR2540	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2541	-	LC1760CB6ATR2541	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2541	-	LC1760CB6BTR2541	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2542	-	LC1760CB6ATR2542	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2542	-	LC1760CB6BTR2542	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2543	-	LC1760CB6ATR2543	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2543	-	LC1760CB6BTR2543	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2544	-	LC1760CB6ATR2544	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2544	-	LC1760CB6BTR2544	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2545	-	LC1760CB6ATR2545	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2545	-	LC1760CB6BTR2545	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2546	-	LC1760CB6ATR2546	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2546	-	LC1760CB6BTR2546	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2547	-	LC1760CB6ATR2547	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2547	-	LC1760CB6BTR2547	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2548	-	LC1760CB6ATR2548	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2548	-	LC1760CB6BTR2548	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2549	-	LC1760CB6ATR2549	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2549	-	LC1760CB6BTR2549	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2550	-	LC1760CB6ATR2550	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2550	-	LC1760CB6BTR2550	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2612	-	LC1760CB6ATR2612	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2612	-	LC1760CB6BTR2612	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX2613	-	LC1760CB6ATR2613	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2613	-	LC1760CB6BTR2613	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2614	-	LC1760CB6ATR2614	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2614	-	LC1760CB6BTR2614	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2615	-	LC1760CB6ATR2615	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2615	-	LC1760CB6BTR2615	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2616	-	LC1760CB6ATR2616	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2616	-	LC1760CB6BTR2616	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2617	-	LC1760CB6ATR2617	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2617	-	LC1760CB6BTR2617	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2618	-	LC1760CB6ATR2618	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2618	-	LC1760CB6BTR2618	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2619	-	LC1760CB6ATR2619	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2619	-	LC1760CB6BTR2619	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2620	-	LC1760CB6ATR2620	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2620	-	LC1760CB6BTR2620	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2621	-	LC1760CB6ATR2621	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2621	-	LC1760CB6BTR2621	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2622	-	LC1760CB6ATR2622	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2622	-	LC1760CB6BTR2622	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2623	-	LC1760CB6ATR2623	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2623	-	LC1760CB6BTR2623	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2624	-	LC1760CB6ATR2624	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2624	-	LC1760CB6BTR2624	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2625	-	LC1760CB6ATR2625	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2625	-	LC1760CB6BTR2625	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2626	-	LC1760CB6ATR2626	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2626	-	LC1760CB6BTR2626	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2627	-	LC1760CB6ATR2627	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2627	-	LC1760CB6BTR2627	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2628	-	LC1760CB6ATR2628	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2628	-	LC1760CB6BTR2628	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2629	-	LC1760CB6ATR2629	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2629	-	LC1760CB6BTR2629	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2630	-	LC1760CB6ATR2630	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2630	-	LC1760CB6BTR2630	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2631	-	LC1760CB6ATR2631	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2631	-	LC1760CB6BTR2631	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2632	-	LC1760CB6ATR2632	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2632	-	LC1760CB6BTR2632	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2633	-	LC1760CB6ATR2633	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2633	-	LC1760CB6BTR2633	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2634	-	LC1760CB6ATR2634	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2634	-	LC1760CB6BTR2634	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2635	-	LC1760CB6ATR2635	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2635	-	LC1760CB6BTR2635	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2636	-	LC1760CB6ATR2636	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2636	-	LC1760CB6BTR2636	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2637	-	LC1760CB6ATR2637	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2637	-	LC1760CB6BTR2637	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2638	-	LC1760CB6ATR2638	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2638	-	LC1760CB6BTR2638	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2639	-	LC1760CB6ATR2639	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2639	-	LC1760CB6BTR2639	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2640	-	LC1760CB6ATR2640	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2640	-	LC1760CB6BTR2640	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2641	-	LC1760CB6ATR2641	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2641	-	LC1760CB6BTR2641	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2642	-	LC1760CB6ATR2642	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2642	-	LC1760CB6BTR2642	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2643	-	LC1760CB6ATR2643	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2643	-	LC1760CB6BTR2643	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2644	-	LC1760CB6ATR2644	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2644	-	LC1760CB6BTR2644	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2645	-	LC1760CB6ATR2645	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2645	-	LC1760CB6BTR2645	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2646	-	LC1760CB6ATR2646	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2646	-	LC1760CB6BTR2646	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2647	-	LC1760CB6ATR2647	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2647	-	LC1760CB6BTR2647	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX2648	-	LC1760CB6ATR2648	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2648	-	LC1760CB6BTR2648	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2649	-	LC1760CB6ATR2649	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2649	-	LC1760CB6BTR2649	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2650	-	LC1760CB6ATR2650	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2650	-	LC1760CB6BTR2650	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2712	-	LC1760CB6ATR2712	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2712	-	LC1760CB6BTR2712	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2713	-	LC1760CB6ATR2713	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2713	-	LC1760CB6BTR2713	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2714	-	LC1760CB6ATR2714	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2714	-	LC1760CB6BTR2714	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2715	-	LC1760CB6ATR2715	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2715	-	LC1760CB6BTR2715	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2716	-	LC1760CB6ATR2716	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2716	-	LC1760CB6BTR2716	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2717	-	LC1760CB6ATR2717	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2717	-	LC1760CB6BTR2717	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2718	-	LC1760CB6ATR2718	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2718	-	LC1760CB6BTR2718	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2719	-	LC1760CB6ATR2719	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2719	-	LC1760CB6BTR2719	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2720	-	LC1760CB6ATR2720	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2720	-	LC1760CB6BTR2720	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2721	-	LC1760CB6ATR2721	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2721	-	LC1760CB6BTR2721	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2722	-	LC1760CB6ATR2722	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2722	-	LC1760CB6BTR2722	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2723	-	LC1760CB6ATR2723	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2723	-	LC1760CB6BTR2723	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2724	-	LC1760CB6ATR2724	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2724	-	LC1760CB6BTR2724	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2725	-	LC1760CB6ATR2725	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2725	-	LC1760CB6BTR2725	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2726	-	LC1760CB6ATR2726	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2726	-	LC1760CB6BTR2726	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2727	-	LC1760CB6ATR2727	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2727	-	LC1760CB6BTR2727	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2728	-	LC1760CB6ATR2728	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2728	-	LC1760CB6BTR2728	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2729	-	LC1760CB6ATR2729	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2729	-	LC1760CB6BTR2729	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2730	-	LC1760CB6ATR2730	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2730	-	LC1760CB6BTR2730	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2731	-	LC1760CB6ATR2731	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2731	-	LC1760CB6BTR2731	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2732	-	LC1760CB6ATR2732	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2732	-	LC1760CB6BTR2732	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2733	-	LC1760CB6ATR2733	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2733	-	LC1760CB6BTR2733	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2734	-	LC1760CB6ATR2734	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2734	-	LC1760CB6BTR2734	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2735	-	LC1760CB6ATR2735	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2735	-	LC1760CB6BTR2735	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2736	-	LC1760CB6ATR2736	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2736	-	LC1760CB6BTR2736	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2737	-	LC1760CB6ATR2737	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2737	-	LC1760CB6BTR2737	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2738	-	LC1760CB6ATR2738	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2738	-	LC1760CB6BTR2738	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2739	-	LC1760CB6ATR2739	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2739	-	LC1760CB6BTR2739	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2740	-	LC1760CB6ATR2740	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2740	-	LC1760CB6BTR2740	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2741	-	LC1760CB6ATR2741	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2741	-	LC1760CB6BTR2741	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2742	-	LC1760CB6ATR2742	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2742	-	LC1760CB6BTR2742	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2743	-	LC1760CB6ATR2743	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2743	-	LC1760CB6BTR2743	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX2744	-	LC1760CB6ATR2744	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2744	-	LC1760CB6BTR2744	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2745	-	LC1760CB6ATR2745	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2745	-	LC1760CB6BTR2745	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2746	-	LC1760CB6ATR2746	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2746	-	LC1760CB6BTR2746	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2747	-	LC1760CB6ATR2747	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2747	-	LC1760CB6BTR2747	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2748	-	LC1760CB6ATR2748	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2748	-	LC1760CB6BTR2748	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2749	-	LC1760CB6ATR2749	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2749	-	LC1760CB6BTR2749	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2750	-	LC1760CB6ATR2750	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2750	-	LC1760CB6BTR2750	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2812	-	LC1760CB6ATR2812	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2812	-	LC1760CB6BTR2812	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2813	-	LC1760CB6ATR2813	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2813	-	LC1760CB6BTR2813	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2814	-	LC1760CB6ATR2814	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2814	-	LC1760CB6BTR2814	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2815	-	LC1760CB6ATR2815	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2815	-	LC1760CB6BTR2815	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2816	-	LC1760CB6ATR2816	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2816	-	LC1760CB6BTR2816	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2817	-	LC1760CB6ATR2817	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2817	-	LC1760CB6BTR2817	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2818	-	LC1760CB6ATR2818	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2818	-	LC1760CB6BTR2818	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2819	-	LC1760CB6ATR2819	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2819	-	LC1760CB6BTR2819	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2820	-	LC1760CB6ATR2820	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2820	-	LC1760CB6BTR2820	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2821	-	LC1760CB6ATR2821	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2821	-	LC1760CB6BTR2821	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2822	-	LC1760CB6ATR2822	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2822	-	LC1760CB6BTR2822	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2823	-	LC1760CB6ATR2823	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2823	-	LC1760CB6BTR2823	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2824	-	LC1760CB6ATR2824	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2824	-	LC1760CB6BTR2824	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2825	-	LC1760CB6ATR2825	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2825	-	LC1760CB6BTR2825	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2826	-	LC1760CB6ATR2826	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2826	-	LC1760CB6BTR2826	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2827	-	LC1760CB6ATR2827	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2827	-	LC1760CB6BTR2827	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2828	-	LC1760CB6ATR2828	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2828	-	LC1760CB6BTR2828	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2829	-	LC1760CB6ATR2829	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2829	-	LC1760CB6BTR2829	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2830	-	LC1760CB6ATR2830	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2830	-	LC1760CB6BTR2830	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2831	-	LC1760CB6ATR2831	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2831	-	LC1760CB6BTR2831	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2832	-	LC1760CB6ATR2832	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2832	-	LC1760CB6BTR2832	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2833	-	LC1760CB6ATR2833	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2833	-	LC1760CB6BTR2833	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2834	-	LC1760CB6ATR2834	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2834	-	LC1760CB6BTR2834	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2835	-	LC1760CB6ATR2835	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2835	-	LC1760CB6BTR2835	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2836	-	LC1760CB6ATR2836	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2836	-	LC1760CB6BTR2836	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2837	-	LC1760CB6ATR2837	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2837	-	LC1760CB6BTR2837	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2838	-	LC1760CB6ATR2838	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2838	-	LC1760CB6BTR2838	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2839	-	LC1760CB6ATR2839	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2839	-	LC1760CB6BTR2839	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX2840	-	LC1760CB6ATR2840	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2840	-	LC1760CB6BTR2840	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2841	-	LC1760CB6ATR2841	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2841	-	LC1760CB6BTR2841	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2842	-	LC1760CB6ATR2842	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2842	-	LC1760CB6BTR2842	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2843	-	LC1760CB6ATR2843	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2843	-	LC1760CB6BTR2843	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2844	-	LC1760CB6ATR2844	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2844	-	LC1760CB6BTR2844	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2845	-	LC1760CB6ATR2845	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2845	-	LC1760CB6BTR2845	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2846	-	LC1760CB6ATR2846	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2846	-	LC1760CB6BTR2846	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2847	-	LC1760CB6ATR2847	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2847	-	LC1760CB6BTR2847	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2848	-	LC1760CB6ATR2848	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2848	-	LC1760CB6BTR2848	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2849	-	LC1760CB6ATR2849	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2849	-	LC1760CB6BTR2849	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2850	-	LC1760CB6ATR2850	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2850	-	LC1760CB6BTR2850	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2912	-	LC1760CB6ATR2912	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2912	-	LC1760CB6BTR2912	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2913	-	LC1760CB6ATR2913	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2913	-	LC1760CB6BTR2913	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2914	-	LC1760CB6ATR2914	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2914	-	LC1760CB6BTR2914	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2915	-	LC1760CB6ATR2915	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2915	-	LC1760CB6BTR2915	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2916	-	LC1760CB6ATR2916	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2916	-	LC1760CB6BTR2916	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2917	-	LC1760CB6ATR2917	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2917	-	LC1760CB6BTR2917	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2918	-	LC1760CB6ATR2918	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2918	-	LC1760CB6BTR2918	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2919	-	LC1760CB6ATR2919	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2919	-	LC1760CB6BTR2919	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2920	-	LC1760CB6ATR2920	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2920	-	LC1760CB6BTR2920	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2921	-	LC1760CB6ATR2921	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2921	-	LC1760CB6BTR2921	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2922	-	LC1760CB6ATR2922	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2922	-	LC1760CB6BTR2922	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2923	-	LC1760CB6ATR2923	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2923	-	LC1760CB6BTR2923	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2924	-	LC1760CB6ATR2924	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2924	-	LC1760CB6BTR2924	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2925	-	LC1760CB6ATR2925	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2925	-	LC1760CB6BTR2925	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2926	-	LC1760CB6ATR2926	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2926	-	LC1760CB6BTR2926	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2927	-	LC1760CB6ATR2927	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2927	-	LC1760CB6BTR2927	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2928	-	LC1760CB6ATR2928	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2928	-	LC1760CB6BTR2928	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2929	-	LC1760CB6ATR2929	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2929	-	LC1760CB6BTR2929	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2930	-	LC1760CB6ATR2930	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2930	-	LC1760CB6BTR2930	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2931	-	LC1760CB6ATR2931	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2931	-	LC1760CB6BTR2931	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2932	-	LC1760CB6ATR2932	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2932	-	LC1760CB6BTR2932	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2933	-	LC1760CB6ATR2933	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2933	-	LC1760CB6BTR2933	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2934	-	LC1760CB6ATR2934	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2934	-	LC1760CB6BTR2934	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2935	-	LC1760CB6ATR2935	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2935	-	LC1760CB6BTR2935	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX2936	-	LC1760CB6ATR2936	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2936	-	LC1760CB6BTR2936	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2937	-	LC1760CB6ATR2937	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2937	-	LC1760CB6BTR2937	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2938	-	LC1760CB6ATR2938	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2938	-	LC1760CB6BTR2938	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2939	-	LC1760CB6ATR2939	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2939	-	LC1760CB6BTR2939	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2940	-	LC1760CB6ATR2940	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2940	-	LC1760CB6BTR2940	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2941	-	LC1760CB6ATR2941	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2941	-	LC1760CB6BTR2941	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2942	-	LC1760CB6ATR2942	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2942	-	LC1760CB6BTR2942	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2943	-	LC1760CB6ATR2943	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2943	-	LC1760CB6BTR2943	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2944	-	LC1760CB6ATR2944	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2944	-	LC1760CB6BTR2944	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2945	-	LC1760CB6ATR2945	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2945	-	LC1760CB6BTR2945	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2946	-	LC1760CB6ATR2946	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2946	-	LC1760CB6BTR2946	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2947	-	LC1760CB6ATR2947	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2947	-	LC1760CB6BTR2947	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2948	-	LC1760CB6ATR2948	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2948	-	LC1760CB6BTR2948	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2949	-	LC1760CB6ATR2949	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2949	-	LC1760CB6BTR2949	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX2950	-	LC1760CB6ATR2950	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX2950	-	LC1760CB6BTR2950	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3012	-	LC1760CB6ATR3012	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3012	-	LC1760CB6BTR3012	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3013	-	LC1760CB6ATR3013	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3013	-	LC1760CB6BTR3013	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3014	-	LC1760CB6ATR3014	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3014	-	LC1760CB6BTR3014	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3015	-	LC1760CB6ATR3015	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3015	-	LC1760CB6BTR3015	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3016	-	LC1760CB6ATR3016	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3016	-	LC1760CB6BTR3016	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3017	-	LC1760CB6ATR3017	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3017	-	LC1760CB6BTR3017	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3018	-	LC1760CB6ATR3018	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3018	-	LC1760CB6BTR3018	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3019	-	LC1760CB6ATR3019	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3019	-	LC1760CB6BTR3019	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3020	-	LC1760CB6ATR3020	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3020	-	LC1760CB6BTR3020	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3021	-	LC1760CB6ATR3021	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3021	-	LC1760CB6BTR3021	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3022	-	LC1760CB6ATR3022	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3022	-	LC1760CB6BTR3022	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3023	-	LC1760CB6ATR3023	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3023	-	LC1760CB6BTR3023	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3024	-	LC1760CB6ATR3024	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3024	-	LC1760CB6BTR3024	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3025	-	LC1760CB6ATR3025	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3025	-	LC1760CB6BTR3025	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3026	-	LC1760CB6ATR3026	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3026	-	LC1760CB6BTR3026	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3027	-	LC1760CB6ATR3027	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3027	-	LC1760CB6BTR3027	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3028	-	LC1760CB6ATR3028	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3028	-	LC1760CB6BTR3028	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3029	-	LC1760CB6ATR3029	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3029	-	LC1760CB6BTR3029	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3030	-	LC1760CB6ATR3030	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3030	-	LC1760CB6BTR3030	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3031	-	LC1760CB6ATR3031	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3031	-	LC1760CB6BTR3031	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX3032	-	LC1760CB6ATR3032	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3032	-	LC1760CB6BTR3032	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3033	-	LC1760CB6ATR3033	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3033	-	LC1760CB6BTR3033	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3034	-	LC1760CB6ATR3034	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3034	-	LC1760CB6BTR3034	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3035	-	LC1760CB6ATR3035	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3035	-	LC1760CB6BTR3035	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3036	-	LC1760CB6ATR3036	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3036	-	LC1760CB6BTR3036	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3037	-	LC1760CB6ATR3037	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3037	-	LC1760CB6BTR3037	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3038	-	LC1760CB6ATR3038	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3038	-	LC1760CB6BTR3038	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3039	-	LC1760CB6ATR3039	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3039	-	LC1760CB6BTR3039	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3040	-	LC1760CB6ATR3040	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3040	-	LC1760CB6BTR3040	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3041	-	LC1760CB6ATR3041	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3041	-	LC1760CB6BTR3041	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3042	-	LC1760CB6ATR3042	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3042	-	LC1760CB6BTR3042	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3043	-	LC1760CB6ATR3043	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3043	-	LC1760CB6BTR3043	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3044	-	LC1760CB6ATR3044	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3044	-	LC1760CB6BTR3044	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3045	-	LC1760CB6ATR3045	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3045	-	LC1760CB6BTR3045	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3046	-	LC1760CB6ATR3046	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3046	-	LC1760CB6BTR3046	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3047	-	LC1760CB6ATR3047	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3047	-	LC1760CB6BTR3047	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3048	-	LC1760CB6ATR3048	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3048	-	LC1760CB6BTR3048	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3049	-	LC1760CB6ATR3049	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3049	-	LC1760CB6BTR3049	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3050	-	LC1760CB6ATR3050	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3050	-	LC1760CB6BTR3050	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3112	-	LC1760CB6ATR3112	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3112	-	LC1760CB6BTR3112	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3113	-	LC1760CB6ATR3113	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3113	-	LC1760CB6BTR3113	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3114	-	LC1760CB6ATR3114	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3114	-	LC1760CB6BTR3114	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3115	-	LC1760CB6ATR3115	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3115	-	LC1760CB6BTR3115	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3116	-	LC1760CB6ATR3116	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3116	-	LC1760CB6BTR3116	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3117	-	LC1760CB6ATR3117	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3117	-	LC1760CB6BTR3117	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3118	-	LC1760CB6ATR3118	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3118	-	LC1760CB6BTR3118	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3119	-	LC1760CB6ATR3119	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3119	-	LC1760CB6BTR3119	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3120	-	LC1760CB6ATR3120	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3120	-	LC1760CB6BTR3120	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3121	-	LC1760CB6ATR3121	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3121	-	LC1760CB6BTR3121	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3122	-	LC1760CB6ATR3122	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3122	-	LC1760CB6BTR3122	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3123	-	LC1760CB6ATR3123	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3123	-	LC1760CB6BTR3123	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3124	-	LC1760CB6ATR3124	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3124	-	LC1760CB6BTR3124	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3125	-	LC1760CB6ATR3125	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3125	-	LC1760CB6BTR3125	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3126	-	LC1760CB6ATR3126	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3126	-	LC1760CB6BTR3126	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3127	-	LC1760CB6ATR3127	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3127	-	LC1760CB6BTR3127	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX3128	-	LC1760CB6ATR3128	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3128	-	LC1760CB6BTR3128	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3129	-	LC1760CB6ATR3129	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3129	-	LC1760CB6BTR3129	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3130	-	LC1760CB6ATR3130	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3130	-	LC1760CB6BTR3130	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3131	-	LC1760CB6ATR3131	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3131	-	LC1760CB6BTR3131	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3132	-	LC1760CB6ATR3132	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3132	-	LC1760CB6BTR3132	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3133	-	LC1760CB6ATR3133	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3133	-	LC1760CB6BTR3133	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3134	-	LC1760CB6ATR3134	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3134	-	LC1760CB6BTR3134	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3135	-	LC1760CB6ATR3135	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3135	-	LC1760CB6BTR3135	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3136	-	LC1760CB6ATR3136	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3136	-	LC1760CB6BTR3136	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3137	-	LC1760CB6ATR3137	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3137	-	LC1760CB6BTR3137	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3138	-	LC1760CB6ATR3138	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3138	-	LC1760CB6BTR3138	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3139	-	LC1760CB6ATR3139	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3139	-	LC1760CB6BTR3139	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3140	-	LC1760CB6ATR3140	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3140	-	LC1760CB6BTR3140	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3141	-	LC1760CB6ATR3141	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3141	-	LC1760CB6BTR3141	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3142	-	LC1760CB6ATR3142	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3142	-	LC1760CB6BTR3142	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3143	-	LC1760CB6ATR3143	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3143	-	LC1760CB6BTR3143	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3144	-	LC1760CB6ATR3144	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3144	-	LC1760CB6BTR3144	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3145	-	LC1760CB6ATR3145	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3145	-	LC1760CB6BTR3145	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3146	-	LC1760CB6ATR3146	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3146	-	LC1760CB6BTR3146	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3147	-	LC1760CB6ATR3147	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3147	-	LC1760CB6BTR3147	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3148	-	LC1760CB6ATR3148	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3148	-	LC1760CB6BTR3148	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3149	-	LC1760CB6ATR3149	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3149	-	LC1760CB6BTR3149	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3150	-	LC1760CB6ATR3150	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3150	-	LC1760CB6BTR3150	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3212	-	LC1760CB6ATR3212	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3212	-	LC1760CB6BTR3212	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3213	-	LC1760CB6ATR3213	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3213	-	LC1760CB6BTR3213	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3214	-	LC1760CB6ATR3214	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3214	-	LC1760CB6BTR3214	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3215	-	LC1760CB6ATR3215	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3215	-	LC1760CB6BTR3215	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3216	-	LC1760CB6ATR3216	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3216	-	LC1760CB6BTR3216	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3217	-	LC1760CB6ATR3217	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3217	-	LC1760CB6BTR3217	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3218	-	LC1760CB6ATR3218	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3218	-	LC1760CB6BTR3218	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3219	-	LC1760CB6ATR3219	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3219	-	LC1760CB6BTR3219	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3220	-	LC1760CB6ATR3220	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3220	-	LC1760CB6BTR3220	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3221	-	LC1760CB6ATR3221	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3221	-	LC1760CB6BTR3221	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3222	-	LC1760CB6ATR3222	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3222	-	LC1760CB6BTR3222	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3223	-	LC1760CB6ATR3223	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3223	-	LC1760CB6BTR3223	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX3224	-	LC1760CB6ATR3224	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3224	-	LC1760CB6BTR3224	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3225	-	LC1760CB6ATR3225	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3225	-	LC1760CB6BTR3225	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3226	-	LC1760CB6ATR3226	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3226	-	LC1760CB6BTR3226	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3227	-	LC1760CB6ATR3227	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3227	-	LC1760CB6BTR3227	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3228	-	LC1760CB6ATR3228	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3228	-	LC1760CB6BTR3228	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3229	-	LC1760CB6ATR3229	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3229	-	LC1760CB6BTR3229	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3230	-	LC1760CB6ATR3230	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3230	-	LC1760CB6BTR3230	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3231	-	LC1760CB6ATR3231	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3231	-	LC1760CB6BTR3231	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3232	-	LC1760CB6ATR3232	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3232	-	LC1760CB6BTR3232	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3233	-	LC1760CB6ATR3233	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3233	-	LC1760CB6BTR3233	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3234	-	LC1760CB6ATR3234	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3234	-	LC1760CB6BTR3234	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3235	-	LC1760CB6ATR3235	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3235	-	LC1760CB6BTR3235	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3236	-	LC1760CB6ATR3236	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3236	-	LC1760CB6BTR3236	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3237	-	LC1760CB6ATR3237	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3237	-	LC1760CB6BTR3237	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3238	-	LC1760CB6ATR3238	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3238	-	LC1760CB6BTR3238	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3239	-	LC1760CB6ATR3239	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3239	-	LC1760CB6BTR3239	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3240	-	LC1760CB6ATR3240	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3240	-	LC1760CB6BTR3240	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3241	-	LC1760CB6ATR3241	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3241	-	LC1760CB6BTR3241	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3242	-	LC1760CB6ATR3242	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3242	-	LC1760CB6BTR3242	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3243	-	LC1760CB6ATR3243	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3243	-	LC1760CB6BTR3243	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3244	-	LC1760CB6ATR3244	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3244	-	LC1760CB6BTR3244	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3245	-	LC1760CB6ATR3245	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3245	-	LC1760CB6BTR3245	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3246	-	LC1760CB6ATR3246	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3246	-	LC1760CB6BTR3246	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3247	-	LC1760CB6ATR3247	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3247	-	LC1760CB6BTR3247	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3248	-	LC1760CB6ATR3248	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3248	-	LC1760CB6BTR3248	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3249	-	LC1760CB6ATR3249	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3249	-	LC1760CB6BTR3249	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3250	-	LC1760CB6ATR3250	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3250	-	LC1760CB6BTR3250	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3312	-	LC1760CB6ATR3312	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3312	-	LC1760CB6BTR3312	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3313	-	LC1760CB6ATR3313	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3313	-	LC1760CB6BTR3313	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3314	-	LC1760CB6ATR3314	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3314	-	LC1760CB6BTR3314	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3315	-	LC1760CB6ATR3315	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3315	-	LC1760CB6BTR3315	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3316	-	LC1760CB6ATR3316	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3316	-	LC1760CB6BTR3316	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3317	-	LC1760CB6ATR3317	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3317	-	LC1760CB6BTR3317	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3318	-	LC1760CB6ATR3318	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3318	-	LC1760CB6BTR3318	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3319	-	LC1760CB6ATR3319	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3319	-	LC1760CB6BTR3319	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX3320	-	LC1760CB6ATR3320	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3320	-	LC1760CB6BTR3320	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3321	-	LC1760CB6ATR3321	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3321	-	LC1760CB6BTR3321	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3322	-	LC1760CB6ATR3322	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3322	-	LC1760CB6BTR3322	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3323	-	LC1760CB6ATR3323	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3323	-	LC1760CB6BTR3323	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3324	-	LC1760CB6ATR3324	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3324	-	LC1760CB6BTR3324	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3325	-	LC1760CB6ATR3325	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3325	-	LC1760CB6BTR3325	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3326	-	LC1760CB6ATR3326	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3326	-	LC1760CB6BTR3326	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3327	-	LC1760CB6ATR3327	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3327	-	LC1760CB6BTR3327	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3328	-	LC1760CB6ATR3328	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3328	-	LC1760CB6BTR3328	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3329	-	LC1760CB6ATR3329	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3329	-	LC1760CB6BTR3329	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3330	-	LC1760CB6ATR3330	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3330	-	LC1760CB6BTR3330	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3331	-	LC1760CB6ATR3331	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3331	-	LC1760CB6BTR3331	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3332	-	LC1760CB6ATR3332	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3332	-	LC1760CB6BTR3332	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3333	-	LC1760CB6ATR3333	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3333	-	LC1760CB6BTR3333	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3334	-	LC1760CB6ATR3334	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3334	-	LC1760CB6BTR3334	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3335	-	LC1760CB6ATR3335	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3335	-	LC1760CB6BTR3335	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3336	-	LC1760CB6ATR3336	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3336	-	LC1760CB6BTR3336	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3337	-	LC1760CB6ATR3337	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3337	-	LC1760CB6BTR3337	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3338	-	LC1760CB6ATR3338	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3338	-	LC1760CB6BTR3338	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3339	-	LC1760CB6ATR3339	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3339	-	LC1760CB6BTR3339	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3340	-	LC1760CB6ATR3340	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3340	-	LC1760CB6BTR3340	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3341	-	LC1760CB6ATR3341	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3341	-	LC1760CB6BTR3341	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3342	-	LC1760CB6ATR3342	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3342	-	LC1760CB6BTR3342	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3343	-	LC1760CB6ATR3343	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3343	-	LC1760CB6BTR3343	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3344	-	LC1760CB6ATR3344	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3344	-	LC1760CB6BTR3344	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3345	-	LC1760CB6ATR3345	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3345	-	LC1760CB6BTR3345	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3346	-	LC1760CB6ATR3346	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3346	-	LC1760CB6BTR3346	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3347	-	LC1760CB6ATR3347	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3347	-	LC1760CB6BTR3347	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3348	-	LC1760CB6ATR3348	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3348	-	LC1760CB6BTR3348	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3349	-	LC1760CB6ATR3349	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3349	-	LC1760CB6BTR3349	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3350	-	LC1760CB6ATR3350	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3350	-	LC1760CB6BTR3350	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3412	-	LC1760CB6ATR3412	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3412	-	LC1760CB6BTR3412	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3413	-	LC1760CB6ATR3413	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3413	-	LC1760CB6BTR3413	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3414	-	LC1760CB6ATR3414	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3414	-	LC1760CB6BTR3414	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3415	-	LC1760CB6ATR3415	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3415	-	LC1760CB6BTR3415	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX3416	-	LC1760CB6ATR3416	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3416	-	LC1760CB6BTR3416	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3417	-	LC1760CB6ATR3417	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3417	-	LC1760CB6BTR3417	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3418	-	LC1760CB6ATR3418	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3418	-	LC1760CB6BTR3418	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3419	-	LC1760CB6ATR3419	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3419	-	LC1760CB6BTR3419	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3420	-	LC1760CB6ATR3420	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3420	-	LC1760CB6BTR3420	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3421	-	LC1760CB6ATR3421	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3421	-	LC1760CB6BTR3421	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3422	-	LC1760CB6ATR3422	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3422	-	LC1760CB6BTR3422	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3423	-	LC1760CB6ATR3423	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3423	-	LC1760CB6BTR3423	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3424	-	LC1760CB6ATR3424	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3424	-	LC1760CB6BTR3424	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3425	-	LC1760CB6ATR3425	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3425	-	LC1760CB6BTR3425	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3426	-	LC1760CB6ATR3426	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3426	-	LC1760CB6BTR3426	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3427	-	LC1760CB6ATR3427	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3427	-	LC1760CB6BTR3427	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3428	-	LC1760CB6ATR3428	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3428	-	LC1760CB6BTR3428	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3429	-	LC1760CB6ATR3429	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3429	-	LC1760CB6BTR3429	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3430	-	LC1760CB6ATR3430	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3430	-	LC1760CB6BTR3430	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3431	-	LC1760CB6ATR3431	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3431	-	LC1760CB6BTR3431	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3432	-	LC1760CB6ATR3432	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3432	-	LC1760CB6BTR3432	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3433	-	LC1760CB6ATR3433	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3433	-	LC1760CB6BTR3433	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3434	-	LC1760CB6ATR3434	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3434	-	LC1760CB6BTR3434	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3435	-	LC1760CB6ATR3435	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3435	-	LC1760CB6BTR3435	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3436	-	LC1760CB6ATR3436	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3436	-	LC1760CB6BTR3436	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3437	-	LC1760CB6ATR3437	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3437	-	LC1760CB6BTR3437	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3438	-	LC1760CB6ATR3438	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3438	-	LC1760CB6BTR3438	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3439	-	LC1760CB6ATR3439	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3439	-	LC1760CB6BTR3439	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3440	-	LC1760CB6ATR3440	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3440	-	LC1760CB6BTR3440	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3441	-	LC1760CB6ATR3441	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3441	-	LC1760CB6BTR3441	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3442	-	LC1760CB6ATR3442	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3442	-	LC1760CB6BTR3442	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3443	-	LC1760CB6ATR3443	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3443	-	LC1760CB6BTR3443	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3444	-	LC1760CB6ATR3444	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3444	-	LC1760CB6BTR3444	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3445	-	LC1760CB6ATR3445	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3445	-	LC1760CB6BTR3445	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3446	-	LC1760CB6ATR3446	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3446	-	LC1760CB6BTR3446	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3447	-	LC1760CB6ATR3447	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3447	-	LC1760CB6BTR3447	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3448	-	LC1760CB6ATR3448	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3448	-	LC1760CB6BTR3448	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3449	-	LC1760CB6ATR3449	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3449	-	LC1760CB6BTR3449	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3450	-	LC1760CB6ATR3450	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3450	-	LC1760CB6BTR3450	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX3512	-	LC1760CB6ATR3512	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3512	-	LC1760CB6BTR3512	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3513	-	LC1760CB6ATR3513	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3513	-	LC1760CB6BTR3513	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3514	-	LC1760CB6ATR3514	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3514	-	LC1760CB6BTR3514	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3515	-	LC1760CB6ATR3515	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3515	-	LC1760CB6BTR3515	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3516	-	LC1760CB6ATR3516	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3516	-	LC1760CB6BTR3516	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3517	-	LC1760CB6ATR3517	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3517	-	LC1760CB6BTR3517	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3518	-	LC1760CB6ATR3518	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3518	-	LC1760CB6BTR3518	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3519	-	LC1760CB6ATR3519	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3519	-	LC1760CB6BTR3519	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3520	-	LC1760CB6ATR3520	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3520	-	LC1760CB6BTR3520	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3521	-	LC1760CB6ATR3521	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3521	-	LC1760CB6BTR3521	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3522	-	LC1760CB6ATR3522	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3522	-	LC1760CB6BTR3522	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3523	-	LC1760CB6ATR3523	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3523	-	LC1760CB6BTR3523	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3524	-	LC1760CB6ATR3524	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3524	-	LC1760CB6BTR3524	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3525	-	LC1760CB6ATR3525	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3525	-	LC1760CB6BTR3525	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3526	-	LC1760CB6ATR3526	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3526	-	LC1760CB6BTR3526	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3527	-	LC1760CB6ATR3527	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3527	-	LC1760CB6BTR3527	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3528	-	LC1760CB6ATR3528	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3528	-	LC1760CB6BTR3528	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3529	-	LC1760CB6ATR3529	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3529	-	LC1760CB6BTR3529	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3530	-	LC1760CB6ATR3530	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3530	-	LC1760CB6BTR3530	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3531	-	LC1760CB6ATR3531	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3531	-	LC1760CB6BTR3531	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3532	-	LC1760CB6ATR3532	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3532	-	LC1760CB6BTR3532	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3533	-	LC1760CB6ATR3533	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3533	-	LC1760CB6BTR3533	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3534	-	LC1760CB6ATR3534	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3534	-	LC1760CB6BTR3534	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3535	-	LC1760CB6ATR3535	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3535	-	LC1760CB6BTR3535	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3536	-	LC1760CB6ATR3536	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3536	-	LC1760CB6BTR3536	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3537	-	LC1760CB6ATR3537	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3537	-	LC1760CB6BTR3537	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3538	-	LC1760CB6ATR3538	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3538	-	LC1760CB6BTR3538	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3539	-	LC1760CB6ATR3539	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3539	-	LC1760CB6BTR3539	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3540	-	LC1760CB6ATR3540	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3540	-	LC1760CB6BTR3540	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3541	-	LC1760CB6ATR3541	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3541	-	LC1760CB6BTR3541	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3542	-	LC1760CB6ATR3542	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3542	-	LC1760CB6BTR3542	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3543	-	LC1760CB6ATR3543	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3543	-	LC1760CB6BTR3543	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3544	-	LC1760CB6ATR3544	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3544	-	LC1760CB6BTR3544	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3545	-	LC1760CB6ATR3545	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3545	-	LC1760CB6BTR3545	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3546	-	LC1760CB6ATR3546	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3546	-	LC1760CB6BTR3546	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX3547	-	LC1760CB6ATR3547	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3547	-	LC1760CB6BTR3547	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3548	-	LC1760CB6ATR3548	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3548	-	LC1760CB6BTR3548	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3549	-	LC1760CB6ATR3549	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3549	-	LC1760CB6BTR3549	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3550	-	LC1760CB6ATR3550	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3550	-	LC1760CB6BTR3550	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3612	-	LC1760CB6ATR3612	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3612	-	LC1760CB6BTR3612	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3613	-	LC1760CB6ATR3613	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3613	-	LC1760CB6BTR3613	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3614	-	LC1760CB6ATR3614	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3614	-	LC1760CB6BTR3614	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3615	-	LC1760CB6ATR3615	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3615	-	LC1760CB6BTR3615	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3616	-	LC1760CB6ATR3616	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3616	-	LC1760CB6BTR3616	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3617	-	LC1760CB6ATR3617	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3617	-	LC1760CB6BTR3617	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3618	-	LC1760CB6ATR3618	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3618	-	LC1760CB6BTR3618	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3619	-	LC1760CB6ATR3619	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3619	-	LC1760CB6BTR3619	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3620	-	LC1760CB6ATR3620	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3620	-	LC1760CB6BTR3620	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3621	-	LC1760CB6ATR3621	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3621	-	LC1760CB6BTR3621	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3622	-	LC1760CB6ATR3622	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3622	-	LC1760CB6BTR3622	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3623	-	LC1760CB6ATR3623	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3623	-	LC1760CB6BTR3623	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3624	-	LC1760CB6ATR3624	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3624	-	LC1760CB6BTR3624	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3625	-	LC1760CB6ATR3625	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3625	-	LC1760CB6BTR3625	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3626	-	LC1760CB6ATR3626	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3626	-	LC1760CB6BTR3626	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3627	-	LC1760CB6ATR3627	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3627	-	LC1760CB6BTR3627	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3628	-	LC1760CB6ATR3628	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3628	-	LC1760CB6BTR3628	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3629	-	LC1760CB6ATR3629	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3629	-	LC1760CB6BTR3629	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3630	-	LC1760CB6ATR3630	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3630	-	LC1760CB6BTR3630	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3631	-	LC1760CB6ATR3631	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3631	-	LC1760CB6BTR3631	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3632	-	LC1760CB6ATR3632	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3632	-	LC1760CB6BTR3632	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3633	-	LC1760CB6ATR3633	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3633	-	LC1760CB6BTR3633	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3634	-	LC1760CB6ATR3634	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3634	-	LC1760CB6BTR3634	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3635	-	LC1760CB6ATR3635	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3635	-	LC1760CB6BTR3635	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3636	-	LC1760CB6ATR3636	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3636	-	LC1760CB6BTR3636	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3637	-	LC1760CB6ATR3637	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3637	-	LC1760CB6BTR3637	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3638	-	LC1760CB6ATR3638	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3638	-	LC1760CB6BTR3638	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3639	-	LC1760CB6ATR3639	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3639	-	LC1760CB6BTR3639	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3640	-	LC1760CB6ATR3640	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3640	-	LC1760CB6BTR3640	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3641	-	LC1760CB6ATR3641	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3641	-	LC1760CB6BTR3641	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3642	-	LC1760CB6ATR3642	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3642	-	LC1760CB6BTR3642	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX3643	-	LC1760CB6ATR3643	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3643	-	LC1760CB6BTR3643	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3644	-	LC1760CB6ATR3644	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3644	-	LC1760CB6BTR3644	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3645	-	LC1760CB6ATR3645	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3645	-	LC1760CB6BTR3645	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3646	-	LC1760CB6ATR3646	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3646	-	LC1760CB6BTR3646	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3647	-	LC1760CB6ATR3647	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3647	-	LC1760CB6BTR3647	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3648	-	LC1760CB6ATR3648	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3648	-	LC1760CB6BTR3648	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3649	-	LC1760CB6ATR3649	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3649	-	LC1760CB6BTR3649	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3650	-	LC1760CB6ATR3650	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3650	-	LC1760CB6BTR3650	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3712	-	LC1760CB6ATR3712	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3712	-	LC1760CB6BTR3712	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3713	-	LC1760CB6ATR3713	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3713	-	LC1760CB6BTR3713	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3714	-	LC1760CB6ATR3714	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3714	-	LC1760CB6BTR3714	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3715	-	LC1760CB6ATR3715	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3715	-	LC1760CB6BTR3715	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3716	-	LC1760CB6ATR3716	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3716	-	LC1760CB6BTR3716	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3717	-	LC1760CB6ATR3717	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3717	-	LC1760CB6BTR3717	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3718	-	LC1760CB6ATR3718	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3718	-	LC1760CB6BTR3718	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3719	-	LC1760CB6ATR3719	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3719	-	LC1760CB6BTR3719	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3720	-	LC1760CB6ATR3720	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3720	-	LC1760CB6BTR3720	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3721	-	LC1760CB6ATR3721	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3721	-	LC1760CB6BTR3721	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3722	-	LC1760CB6ATR3722	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3722	-	LC1760CB6BTR3722	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3723	-	LC1760CB6ATR3723	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3723	-	LC1760CB6BTR3723	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3724	-	LC1760CB6ATR3724	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3724	-	LC1760CB6BTR3724	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3725	-	LC1760CB6ATR3725	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3725	-	LC1760CB6BTR3725	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3726	-	LC1760CB6ATR3726	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3726	-	LC1760CB6BTR3726	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3727	-	LC1760CB6ATR3727	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3727	-	LC1760CB6BTR3727	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3728	-	LC1760CB6ATR3728	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3728	-	LC1760CB6BTR3728	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3729	-	LC1760CB6ATR3729	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3729	-	LC1760CB6BTR3729	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3730	-	LC1760CB6ATR3730	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3730	-	LC1760CB6BTR3730	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3731	-	LC1760CB6ATR3731	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3731	-	LC1760CB6BTR3731	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3732	-	LC1760CB6ATR3732	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3732	-	LC1760CB6BTR3732	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3733	-	LC1760CB6ATR3733	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3733	-	LC1760CB6BTR3733	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3734	-	LC1760CB6ATR3734	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3734	-	LC1760CB6BTR3734	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3735	-	LC1760CB6ATR3735	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3735	-	LC1760CB6BTR3735	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3736	-	LC1760CB6ATR3736	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3736	-	LC1760CB6BTR3736	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3737	-	LC1760CB6ATR3737	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3737	-	LC1760CB6BTR3737	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3738	-	LC1760CB6ATR3738	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3738	-	LC1760CB6BTR3738	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX3739	-	LC1760CB6ATR3739	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3739	-	LC1760CB6BTR3739	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3740	-	LC1760CB6ATR3740	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3740	-	LC1760CB6BTR3740	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3741	-	LC1760CB6ATR3741	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3741	-	LC1760CB6BTR3741	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3742	-	LC1760CB6ATR3742	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3742	-	LC1760CB6BTR3742	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3743	-	LC1760CB6ATR3743	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3743	-	LC1760CB6BTR3743	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3744	-	LC1760CB6ATR3744	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3744	-	LC1760CB6BTR3744	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3745	-	LC1760CB6ATR3745	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3745	-	LC1760CB6BTR3745	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3746	-	LC1760CB6ATR3746	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3746	-	LC1760CB6BTR3746	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3747	-	LC1760CB6ATR3747	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3747	-	LC1760CB6BTR3747	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3748	-	LC1760CB6ATR3748	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3748	-	LC1760CB6BTR3748	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3749	-	LC1760CB6ATR3749	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3749	-	LC1760CB6BTR3749	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3750	-	LC1760CB6ATR3750	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3750	-	LC1760CB6BTR3750	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3812	-	LC1760CB6ATR3812	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3812	-	LC1760CB6BTR3812	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3813	-	LC1760CB6ATR3813	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3813	-	LC1760CB6BTR3813	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3814	-	LC1760CB6ATR3814	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3814	-	LC1760CB6BTR3814	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3815	-	LC1760CB6ATR3815	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3815	-	LC1760CB6BTR3815	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3816	-	LC1760CB6ATR3816	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3816	-	LC1760CB6BTR3816	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3817	-	LC1760CB6ATR3817	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3817	-	LC1760CB6BTR3817	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3818	-	LC1760CB6ATR3818	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3818	-	LC1760CB6BTR3818	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3819	-	LC1760CB6ATR3819	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3819	-	LC1760CB6BTR3819	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3820	-	LC1760CB6ATR3820	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3820	-	LC1760CB6BTR3820	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3821	-	LC1760CB6ATR3821	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3821	-	LC1760CB6BTR3821	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3822	-	LC1760CB6ATR3822	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3822	-	LC1760CB6BTR3822	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3823	-	LC1760CB6ATR3823	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3823	-	LC1760CB6BTR3823	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3824	-	LC1760CB6ATR3824	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3824	-	LC1760CB6BTR3824	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3825	-	LC1760CB6ATR3825	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3825	-	LC1760CB6BTR3825	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3826	-	LC1760CB6ATR3826	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3826	-	LC1760CB6BTR3826	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3827	-	LC1760CB6ATR3827	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3827	-	LC1760CB6BTR3827	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3828	-	LC1760CB6ATR3828	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3828	-	LC1760CB6BTR3828	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3829	-	LC1760CB6ATR3829	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3829	-	LC1760CB6BTR3829	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3830	-	LC1760CB6ATR3830	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3830	-	LC1760CB6BTR3830	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3831	-	LC1760CB6ATR3831	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3831	-	LC1760CB6BTR3831	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3832	-	LC1760CB6ATR3832	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3832	-	LC1760CB6BTR3832	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3833	-	LC1760CB6ATR3833	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3833	-	LC1760CB6BTR3833	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3834	-	LC1760CB6ATR3834	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3834	-	LC1760CB6BTR3834	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX3835	-	LC1760CB6ATR3835	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3835	-	LC1760CB6BTR3835	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3836	-	LC1760CB6ATR3836	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3836	-	LC1760CB6BTR3836	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3837	-	LC1760CB6ATR3837	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3837	-	LC1760CB6BTR3837	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3838	-	LC1760CB6ATR3838	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3838	-	LC1760CB6BTR3838	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3839	-	LC1760CB6ATR3839	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3839	-	LC1760CB6BTR3839	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3840	-	LC1760CB6ATR3840	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3840	-	LC1760CB6BTR3840	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3841	-	LC1760CB6ATR3841	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3841	-	LC1760CB6BTR3841	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3842	-	LC1760CB6ATR3842	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3842	-	LC1760CB6BTR3842	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3843	-	LC1760CB6ATR3843	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3843	-	LC1760CB6BTR3843	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3844	-	LC1760CB6ATR3844	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3844	-	LC1760CB6BTR3844	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3845	-	LC1760CB6ATR3845	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3845	-	LC1760CB6BTR3845	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3846	-	LC1760CB6ATR3846	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3846	-	LC1760CB6BTR3846	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3847	-	LC1760CB6ATR3847	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3847	-	LC1760CB6BTR3847	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3848	-	LC1760CB6ATR3848	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3848	-	LC1760CB6BTR3848	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3849	-	LC1760CB6ATR3849	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3849	-	LC1760CB6BTR3849	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3850	-	LC1760CB6ATR3850	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3850	-	LC1760CB6BTR3850	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3912	-	LC1760CB6ATR3912	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3912	-	LC1760CB6BTR3912	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3913	-	LC1760CB6ATR3913	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3913	-	LC1760CB6BTR3913	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3914	-	LC1760CB6ATR3914	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3914	-	LC1760CB6BTR3914	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3915	-	LC1760CB6ATR3915	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3915	-	LC1760CB6BTR3915	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3916	-	LC1760CB6ATR3916	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3916	-	LC1760CB6BTR3916	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3917	-	LC1760CB6ATR3917	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3917	-	LC1760CB6BTR3917	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3918	-	LC1760CB6ATR3918	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3918	-	LC1760CB6BTR3918	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3919	-	LC1760CB6ATR3919	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3919	-	LC1760CB6BTR3919	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3920	-	LC1760CB6ATR3920	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3920	-	LC1760CB6BTR3920	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3921	-	LC1760CB6ATR3921	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3921	-	LC1760CB6BTR3921	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3922	-	LC1760CB6ATR3922	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3922	-	LC1760CB6BTR3922	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3923	-	LC1760CB6ATR3923	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3923	-	LC1760CB6BTR3923	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3924	-	LC1760CB6ATR3924	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3924	-	LC1760CB6BTR3924	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3925	-	LC1760CB6ATR3925	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3925	-	LC1760CB6BTR3925	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3926	-	LC1760CB6ATR3926	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3926	-	LC1760CB6BTR3926	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3927	-	LC1760CB6ATR3927	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3927	-	LC1760CB6BTR3927	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3928	-	LC1760CB6ATR3928	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3928	-	LC1760CB6BTR3928	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3929	-	LC1760CB6ATR3929	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3929	-	LC1760CB6BTR3929	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3930	-	LC1760CB6ATR3930	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3930	-	LC1760CB6BTR3930	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX3931	-	LC1760CB6ATR3931	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3931	-	LC1760CB6BTR3931	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3932	-	LC1760CB6ATR3932	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3932	-	LC1760CB6BTR3932	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3933	-	LC1760CB6ATR3933	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3933	-	LC1760CB6BTR3933	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3934	-	LC1760CB6ATR3934	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3934	-	LC1760CB6BTR3934	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3935	-	LC1760CB6ATR3935	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3935	-	LC1760CB6BTR3935	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3936	-	LC1760CB6ATR3936	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3936	-	LC1760CB6BTR3936	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3937	-	LC1760CB6ATR3937	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3937	-	LC1760CB6BTR3937	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3938	-	LC1760CB6ATR3938	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3938	-	LC1760CB6BTR3938	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3939	-	LC1760CB6ATR3939	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3939	-	LC1760CB6BTR3939	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3940	-	LC1760CB6ATR3940	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3940	-	LC1760CB6BTR3940	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3941	-	LC1760CB6ATR3941	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3941	-	LC1760CB6BTR3941	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3942	-	LC1760CB6ATR3942	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3942	-	LC1760CB6BTR3942	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3943	-	LC1760CB6ATR3943	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3943	-	LC1760CB6BTR3943	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3944	-	LC1760CB6ATR3944	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3944	-	LC1760CB6BTR3944	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3945	-	LC1760CB6ATR3945	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3945	-	LC1760CB6BTR3945	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3946	-	LC1760CB6ATR3946	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3946	-	LC1760CB6BTR3946	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3947	-	LC1760CB6ATR3947	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3947	-	LC1760CB6BTR3947	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3948	-	LC1760CB6ATR3948	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3948	-	LC1760CB6BTR3948	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3949	-	LC1760CB6ATR3949	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3949	-	LC1760CB6BTR3949	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX3950	-	LC1760CB6ATR3950	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX3950	-	LC1760CB6BTR3950	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4012	-	LC1760CB6ATR4012	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4012	-	LC1760CB6BTR4012	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4013	-	LC1760CB6ATR4013	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4013	-	LC1760CB6BTR4013	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4014	-	LC1760CB6ATR4014	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4014	-	LC1760CB6BTR4014	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4015	-	LC1760CB6ATR4015	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4015	-	LC1760CB6BTR4015	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4016	-	LC1760CB6ATR4016	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4016	-	LC1760CB6BTR4016	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4017	-	LC1760CB6ATR4017	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4017	-	LC1760CB6BTR4017	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4018	-	LC1760CB6ATR4018	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4018	-	LC1760CB6BTR4018	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4019	-	LC1760CB6ATR4019	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4019	-	LC1760CB6BTR4019	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4020	-	LC1760CB6ATR4020	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4020	-	LC1760CB6BTR4020	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4021	-	LC1760CB6ATR4021	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4021	-	LC1760CB6BTR4021	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4022	-	LC1760CB6ATR4022	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4022	-	LC1760CB6BTR4022	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4023	-	LC1760CB6ATR4023	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4023	-	LC1760CB6BTR4023	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4024	-	LC1760CB6ATR4024	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4024	-	LC1760CB6BTR4024	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4025	-	LC1760CB6ATR4025	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4025	-	LC1760CB6BTR4025	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4026	-	LC1760CB6ATR4026	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4026	-	LC1760CB6BTR4026	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX4027	-	LC1760CB6ATR4027	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4027	-	LC1760CB6BTR4027	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4028	-	LC1760CB6ATR4028	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4028	-	LC1760CB6BTR4028	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4029	-	LC1760CB6ATR4029	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4029	-	LC1760CB6BTR4029	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4030	-	LC1760CB6ATR4030	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4030	-	LC1760CB6BTR4030	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4031	-	LC1760CB6ATR4031	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4031	-	LC1760CB6BTR4031	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4032	-	LC1760CB6ATR4032	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4032	-	LC1760CB6BTR4032	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4033	-	LC1760CB6ATR4033	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4033	-	LC1760CB6BTR4033	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4034	-	LC1760CB6ATR4034	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4034	-	LC1760CB6BTR4034	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4035	-	LC1760CB6ATR4035	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4035	-	LC1760CB6BTR4035	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4036	-	LC1760CB6ATR4036	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4036	-	LC1760CB6BTR4036	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4037	-	LC1760CB6ATR4037	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4037	-	LC1760CB6BTR4037	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4038	-	LC1760CB6ATR4038	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4038	-	LC1760CB6BTR4038	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4039	-	LC1760CB6ATR4039	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4039	-	LC1760CB6BTR4039	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4040	-	LC1760CB6ATR4040	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4040	-	LC1760CB6BTR4040	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4041	-	LC1760CB6ATR4041	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4041	-	LC1760CB6BTR4041	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4042	-	LC1760CB6ATR4042	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4042	-	LC1760CB6BTR4042	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4043	-	LC1760CB6ATR4043	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4043	-	LC1760CB6BTR4043	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4044	-	LC1760CB6ATR4044	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4044	-	LC1760CB6BTR4044	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4045	-	LC1760CB6ATR4045	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4045	-	LC1760CB6BTR4045	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4046	-	LC1760CB6ATR4046	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4046	-	LC1760CB6BTR4046	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4047	-	LC1760CB6ATR4047	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4047	-	LC1760CB6BTR4047	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4048	-	LC1760CB6ATR4048	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4048	-	LC1760CB6BTR4048	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4049	-	LC1760CB6ATR4049	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4049	-	LC1760CB6BTR4049	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4050	-	LC1760CB6ATR4050	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4050	-	LC1760CB6BTR4050	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4112	-	LC1760CB6ATR4112	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4112	-	LC1760CB6BTR4112	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4113	-	LC1760CB6ATR4113	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4113	-	LC1760CB6BTR4113	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4114	-	LC1760CB6ATR4114	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4114	-	LC1760CB6BTR4114	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4115	-	LC1760CB6ATR4115	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4115	-	LC1760CB6BTR4115	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4116	-	LC1760CB6ATR4116	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4116	-	LC1760CB6BTR4116	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4117	-	LC1760CB6ATR4117	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4117	-	LC1760CB6BTR4117	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4118	-	LC1760CB6ATR4118	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4118	-	LC1760CB6BTR4118	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4119	-	LC1760CB6ATR4119	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4119	-	LC1760CB6BTR4119	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4120	-	LC1760CB6ATR4120	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4120	-	LC1760CB6BTR4120	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4121	-	LC1760CB6ATR4121	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4121	-	LC1760CB6BTR4121	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4122	-	LC1760CB6ATR4122	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4122	-	LC1760CB6BTR4122	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX4123	-	LC1760CB6ATR4123	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4123	-	LC1760CB6BTR4123	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4124	-	LC1760CB6ATR4124	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4124	-	LC1760CB6BTR4124	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4125	-	LC1760CB6ATR4125	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4125	-	LC1760CB6BTR4125	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4126	-	LC1760CB6ATR4126	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4126	-	LC1760CB6BTR4126	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4127	-	LC1760CB6ATR4127	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4127	-	LC1760CB6BTR4127	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4128	-	LC1760CB6ATR4128	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4128	-	LC1760CB6BTR4128	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4129	-	LC1760CB6ATR4129	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4129	-	LC1760CB6BTR4129	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4130	-	LC1760CB6ATR4130	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4130	-	LC1760CB6BTR4130	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4131	-	LC1760CB6ATR4131	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4131	-	LC1760CB6BTR4131	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4132	-	LC1760CB6ATR4132	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4132	-	LC1760CB6BTR4132	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4133	-	LC1760CB6ATR4133	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4133	-	LC1760CB6BTR4133	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4134	-	LC1760CB6ATR4134	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4134	-	LC1760CB6BTR4134	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4135	-	LC1760CB6ATR4135	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4135	-	LC1760CB6BTR4135	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4136	-	LC1760CB6ATR4136	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4136	-	LC1760CB6BTR4136	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4137	-	LC1760CB6ATR4137	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4137	-	LC1760CB6BTR4137	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4138	-	LC1760CB6ATR4138	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4138	-	LC1760CB6BTR4138	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4139	-	LC1760CB6ATR4139	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4139	-	LC1760CB6BTR4139	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4140	-	LC1760CB6ATR4140	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4140	-	LC1760CB6BTR4140	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4141	-	LC1760CB6ATR4141	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4141	-	LC1760CB6BTR4141	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4142	-	LC1760CB6ATR4142	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4142	-	LC1760CB6BTR4142	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4143	-	LC1760CB6ATR4143	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4143	-	LC1760CB6BTR4143	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4144	-	LC1760CB6ATR4144	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4144	-	LC1760CB6BTR4144	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4145	-	LC1760CB6ATR4145	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4145	-	LC1760CB6BTR4145	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4146	-	LC1760CB6ATR4146	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4146	-	LC1760CB6BTR4146	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4147	-	LC1760CB6ATR4147	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4147	-	LC1760CB6BTR4147	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4148	-	LC1760CB6ATR4148	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4148	-	LC1760CB6BTR4148	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4149	-	LC1760CB6ATR4149	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4149	-	LC1760CB6BTR4149	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4150	-	LC1760CB6ATR4150	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4150	-	LC1760CB6BTR4150	LVR-IC	LDO, Dual out, Vout1/Vout2=4.1V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4212	-	LC1760CB6ATR4212	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4212	-	LC1760CB6BTR4212	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4213	-	LC1760CB6ATR4213	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4213	-	LC1760CB6BTR4213	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4214	-	LC1760CB6ATR4214	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4214	-	LC1760CB6BTR4214	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4215	-	LC1760CB6ATR4215	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4215	-	LC1760CB6BTR4215	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4216	-	LC1760CB6ATR4216	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4216	-	LC1760CB6BTR4216	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4217	-	LC1760CB6ATR4217	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4217	-	LC1760CB6BTR4217	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4218	-	LC1760CB6ATR4218	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4218	-	LC1760CB6BTR4218	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX4219	-	LC1760CB6ATR4219	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4219	-	LC1760CB6BTR4219	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4220	-	LC1760CB6ATR4220	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4220	-	LC1760CB6BTR4220	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4221	-	LC1760CB6ATR4221	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4221	-	LC1760CB6BTR4221	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4222	-	LC1760CB6ATR4222	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4222	-	LC1760CB6BTR4222	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4223	-	LC1760CB6ATR4223	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4223	-	LC1760CB6BTR4223	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4224	-	LC1760CB6ATR4224	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4224	-	LC1760CB6BTR4224	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4225	-	LC1760CB6ATR4225	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4225	-	LC1760CB6BTR4225	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4226	-	LC1760CB6ATR4226	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4226	-	LC1760CB6BTR4226	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4227	-	LC1760CB6ATR4227	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4227	-	LC1760CB6BTR4227	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4228	-	LC1760CB6ATR4228	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4228	-	LC1760CB6BTR4228	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4229	-	LC1760CB6ATR4229	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4229	-	LC1760CB6BTR4229	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4230	-	LC1760CB6ATR4230	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4230	-	LC1760CB6BTR4230	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4231	-	LC1760CB6ATR4231	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4231	-	LC1760CB6BTR4231	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4232	-	LC1760CB6ATR4232	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4232	-	LC1760CB6BTR4232	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4233	-	LC1760CB6ATR4233	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4233	-	LC1760CB6BTR4233	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4234	-	LC1760CB6ATR4234	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4234	-	LC1760CB6BTR4234	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4235	-	LC1760CB6ATR4235	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4235	-	LC1760CB6BTR4235	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4236	-	LC1760CB6ATR4236	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4236	-	LC1760CB6BTR4236	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4237	-	LC1760CB6ATR4237	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4237	-	LC1760CB6BTR4237	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4238	-	LC1760CB6ATR4238	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4238	-	LC1760CB6BTR4238	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4239	-	LC1760CB6ATR4239	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4239	-	LC1760CB6BTR4239	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4240	-	LC1760CB6ATR4240	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4240	-	LC1760CB6BTR4240	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4241	-	LC1760CB6ATR4241	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4241	-	LC1760CB6BTR4241	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4242	-	LC1760CB6ATR4242	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4242	-	LC1760CB6BTR4242	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4243	-	LC1760CB6ATR4243	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4243	-	LC1760CB6BTR4243	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4244	-	LC1760CB6ATR4244	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4244	-	LC1760CB6BTR4244	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4245	-	LC1760CB6ATR4245	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4245	-	LC1760CB6BTR4245	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4246	-	LC1760CB6ATR4246	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4246	-	LC1760CB6BTR4246	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4247	-	LC1760CB6ATR4247	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4247	-	LC1760CB6BTR4247	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4248	-	LC1760CB6ATR4248	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4248	-	LC1760CB6BTR4248	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4249	-	LC1760CB6ATR4249	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4249	-	LC1760CB6BTR4249	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4250	-	LC1760CB6ATR4250	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4250	-	LC1760CB6BTR4250	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4312	-	LC1760CB6ATR4312	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4312	-	LC1760CB6BTR4312	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4313	-	LC1760CB6ATR4313	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4313	-	LC1760CB6BTR4313	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4314	-	LC1760CB6ATR4314	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4314	-	LC1760CB6BTR4314	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX4315	-	LC1760CB6ATR4315	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4315	-	LC1760CB6BTR4315	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4316	-	LC1760CB6ATR4316	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4316	-	LC1760CB6BTR4316	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4317	-	LC1760CB6ATR4317	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4317	-	LC1760CB6BTR4317	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4318	-	LC1760CB6ATR4318	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4318	-	LC1760CB6BTR4318	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4319	-	LC1760CB6ATR4319	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4319	-	LC1760CB6BTR4319	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4320	-	LC1760CB6ATR4320	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4320	-	LC1760CB6BTR4320	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4321	-	LC1760CB6ATR4321	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4321	-	LC1760CB6BTR4321	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4322	-	LC1760CB6ATR4322	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4322	-	LC1760CB6BTR4322	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4323	-	LC1760CB6ATR4323	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4323	-	LC1760CB6BTR4323	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4324	-	LC1760CB6ATR4324	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4324	-	LC1760CB6BTR4324	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4325	-	LC1760CB6ATR4325	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4325	-	LC1760CB6BTR4325	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4326	-	LC1760CB6ATR4326	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4326	-	LC1760CB6BTR4326	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4327	-	LC1760CB6ATR4327	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4327	-	LC1760CB6BTR4327	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4328	-	LC1760CB6ATR4328	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4328	-	LC1760CB6BTR4328	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4329	-	LC1760CB6ATR4329	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4329	-	LC1760CB6BTR4329	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4330	-	LC1760CB6ATR4330	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4330	-	LC1760CB6BTR4330	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4331	-	LC1760CB6ATR4331	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4331	-	LC1760CB6BTR4331	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4332	-	LC1760CB6ATR4332	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4332	-	LC1760CB6BTR4332	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4333	-	LC1760CB6ATR4333	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4333	-	LC1760CB6BTR4333	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4334	-	LC1760CB6ATR4334	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4334	-	LC1760CB6BTR4334	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4335	-	LC1760CB6ATR4335	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4335	-	LC1760CB6BTR4335	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4336	-	LC1760CB6ATR4336	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4336	-	LC1760CB6BTR4336	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4337	-	LC1760CB6ATR4337	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4337	-	LC1760CB6BTR4337	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4338	-	LC1760CB6ATR4338	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4338	-	LC1760CB6BTR4338	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4339	-	LC1760CB6ATR4339	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4339	-	LC1760CB6BTR4339	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4340	-	LC1760CB6ATR4340	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4340	-	LC1760CB6BTR4340	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4341	-	LC1760CB6ATR4341	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4341	-	LC1760CB6BTR4341	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4342	-	LC1760CB6ATR4342	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4342	-	LC1760CB6BTR4342	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4343	-	LC1760CB6ATR4343	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4343	-	LC1760CB6BTR4343	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4344	-	LC1760CB6ATR4344	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4344	-	LC1760CB6BTR4344	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4345	-	LC1760CB6ATR4345	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4345	-	LC1760CB6BTR4345	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4346	-	LC1760CB6ATR4346	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4346	-	LC1760CB6BTR4346	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4347	-	LC1760CB6ATR4347	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4347	-	LC1760CB6BTR4347	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4348	-	LC1760CB6ATR4348	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4348	-	LC1760CB6BTR4348	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4349	-	LC1760CB6ATR4349	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4349	-	LC1760CB6BTR4349	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX4350	-	LC1760CB6ATR4350	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4350	-	LC1760CB6BTR4350	LVR-IC	LDO, Dual out, Vout1/Vout2=4.3V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4412	-	LC1760CB6ATR4412	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4412	-	LC1760CB6BTR4412	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4413	-	LC1760CB6ATR4413	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4413	-	LC1760CB6BTR4413	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4414	-	LC1760CB6ATR4414	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4414	-	LC1760CB6BTR4414	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4415	-	LC1760CB6ATR4415	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4415	-	LC1760CB6BTR4415	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4416	-	LC1760CB6ATR4416	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4416	-	LC1760CB6BTR4416	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4417	-	LC1760CB6ATR4417	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4417	-	LC1760CB6BTR4417	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4418	-	LC1760CB6ATR4418	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4418	-	LC1760CB6BTR4418	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4419	-	LC1760CB6ATR4419	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4419	-	LC1760CB6BTR4419	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4420	-	LC1760CB6ATR4420	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4420	-	LC1760CB6BTR4420	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4421	-	LC1760CB6ATR4421	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4421	-	LC1760CB6BTR4421	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4422	-	LC1760CB6ATR4422	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4422	-	LC1760CB6BTR4422	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4423	-	LC1760CB6ATR4423	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4423	-	LC1760CB6BTR4423	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4424	-	LC1760CB6ATR4424	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4424	-	LC1760CB6BTR4424	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4425	-	LC1760CB6ATR4425	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4425	-	LC1760CB6BTR4425	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4426	-	LC1760CB6ATR4426	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4426	-	LC1760CB6BTR4426	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4427	-	LC1760CB6ATR4427	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4427	-	LC1760CB6BTR4427	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4428	-	LC1760CB6ATR4428	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4428	-	LC1760CB6BTR4428	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4429	-	LC1760CB6ATR4429	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4429	-	LC1760CB6BTR4429	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4430	-	LC1760CB6ATR4430	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4430	-	LC1760CB6BTR4430	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4431	-	LC1760CB6ATR4431	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4431	-	LC1760CB6BTR4431	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4432	-	LC1760CB6ATR4432	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4432	-	LC1760CB6BTR4432	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4433	-	LC1760CB6ATR4433	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4433	-	LC1760CB6BTR4433	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4434	-	LC1760CB6ATR4434	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4434	-	LC1760CB6BTR4434	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4435	-	LC1760CB6ATR4435	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4435	-	LC1760CB6BTR4435	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4436	-	LC1760CB6ATR4436	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4436	-	LC1760CB6BTR4436	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4437	-	LC1760CB6ATR4437	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4437	-	LC1760CB6BTR4437	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4438	-	LC1760CB6ATR4438	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4438	-	LC1760CB6BTR4438	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4439	-	LC1760CB6ATR4439	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4439	-	LC1760CB6BTR4439	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4440	-	LC1760CB6ATR4440	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4440	-	LC1760CB6BTR4440	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4441	-	LC1760CB6ATR4441	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4441	-	LC1760CB6BTR4441	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4442	-	LC1760CB6ATR4442	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4442	-	LC1760CB6BTR4442	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4443	-	LC1760CB6ATR4443	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4443	-	LC1760CB6BTR4443	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4444	-	LC1760CB6ATR4444	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4444	-	LC1760CB6BTR4444	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4445	-	LC1760CB6ATR4445	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4445	-	LC1760CB6BTR4445	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX4446	-	LC1760CB6ATR4446	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4446	-	LC1760CB6BTR4446	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4447	-	LC1760CB6ATR4447	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4447	-	LC1760CB6BTR4447	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4448	-	LC1760CB6ATR4448	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4448	-	LC1760CB6BTR4448	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4449	-	LC1760CB6ATR4449	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4449	-	LC1760CB6BTR4449	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4450	-	LC1760CB6ATR4450	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4450	-	LC1760CB6BTR4450	LVR-IC	LDO, Dual out, Vout1/Vout2=4.4V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4512	-	LC1760CB6ATR4512	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4512	-	LC1760CB6BTR4512	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4513	-	LC1760CB6ATR4513	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4513	-	LC1760CB6BTR4513	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4514	-	LC1760CB6ATR4514	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4514	-	LC1760CB6BTR4514	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4515	-	LC1760CB6ATR4515	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4515	-	LC1760CB6BTR4515	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4516	-	LC1760CB6ATR4516	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4516	-	LC1760CB6BTR4516	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4517	-	LC1760CB6ATR4517	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4517	-	LC1760CB6BTR4517	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4518	-	LC1760CB6ATR4518	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4518	-	LC1760CB6BTR4518	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4519	-	LC1760CB6ATR4519	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4519	-	LC1760CB6BTR4519	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4520	-	LC1760CB6ATR4520	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4520	-	LC1760CB6BTR4520	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4521	-	LC1760CB6ATR4521	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4521	-	LC1760CB6BTR4521	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4522	-	LC1760CB6ATR4522	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4522	-	LC1760CB6BTR4522	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4523	-	LC1760CB6ATR4523	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4523	-	LC1760CB6BTR4523	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4524	-	LC1760CB6ATR4524	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4524	-	LC1760CB6BTR4524	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4525	-	LC1760CB6ATR4525	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4525	-	LC1760CB6BTR4525	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4526	-	LC1760CB6ATR4526	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4526	-	LC1760CB6BTR4526	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4527	-	LC1760CB6ATR4527	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4527	-	LC1760CB6BTR4527	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4528	-	LC1760CB6ATR4528	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4528	-	LC1760CB6BTR4528	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4529	-	LC1760CB6ATR4529	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4529	-	LC1760CB6BTR4529	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4530	-	LC1760CB6ATR4530	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4530	-	LC1760CB6BTR4530	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4531	-	LC1760CB6ATR4531	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4531	-	LC1760CB6BTR4531	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4532	-	LC1760CB6ATR4532	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4532	-	LC1760CB6BTR4532	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4533	-	LC1760CB6ATR4533	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4533	-	LC1760CB6BTR4533	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4534	-	LC1760CB6ATR4534	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4534	-	LC1760CB6BTR4534	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4535	-	LC1760CB6ATR4535	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4535	-	LC1760CB6BTR4535	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4536	-	LC1760CB6ATR4536	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4536	-	LC1760CB6BTR4536	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4537	-	LC1760CB6ATR4537	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4537	-	LC1760CB6BTR4537	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4538	-	LC1760CB6ATR4538	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4538	-	LC1760CB6BTR4538	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4539	-	LC1760CB6ATR4539	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4539	-	LC1760CB6BTR4539	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4540	-	LC1760CB6ATR4540	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4540	-	LC1760CB6BTR4540	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4541	-	LC1760CB6ATR4541	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4541	-	LC1760CB6BTR4541	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX4542	-	LC1760CB6ATR4542	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4542	-	LC1760CB6BTR4542	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4543	-	LC1760CB6ATR4543	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4543	-	LC1760CB6BTR4543	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4544	-	LC1760CB6ATR4544	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4544	-	LC1760CB6BTR4544	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4545	-	LC1760CB6ATR4545	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4545	-	LC1760CB6BTR4545	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4546	-	LC1760CB6ATR4546	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4546	-	LC1760CB6BTR4546	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4547	-	LC1760CB6ATR4547	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4547	-	LC1760CB6BTR4547	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4548	-	LC1760CB6ATR4548	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4548	-	LC1760CB6BTR4548	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4549	-	LC1760CB6ATR4549	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4549	-	LC1760CB6BTR4549	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4550	-	LC1760CB6ATR4550	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4550	-	LC1760CB6BTR4550	LVR-IC	LDO, Dual out, Vout1/Vout2=4.5V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4612	-	LC1760CB6ATR4612	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4612	-	LC1760CB6BTR4612	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4613	-	LC1760CB6ATR4613	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4613	-	LC1760CB6BTR4613	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4614	-	LC1760CB6ATR4614	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4614	-	LC1760CB6BTR4614	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4615	-	LC1760CB6ATR4615	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4615	-	LC1760CB6BTR4615	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4616	-	LC1760CB6ATR4616	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4616	-	LC1760CB6BTR4616	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4617	-	LC1760CB6ATR4617	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4617	-	LC1760CB6BTR4617	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4618	-	LC1760CB6ATR4618	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4618	-	LC1760CB6BTR4618	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4619	-	LC1760CB6ATR4619	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4619	-	LC1760CB6BTR4619	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4620	-	LC1760CB6ATR4620	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4620	-	LC1760CB6BTR4620	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4621	-	LC1760CB6ATR4621	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4621	-	LC1760CB6BTR4621	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4622	-	LC1760CB6ATR4622	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4622	-	LC1760CB6BTR4622	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4623	-	LC1760CB6ATR4623	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4623	-	LC1760CB6BTR4623	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4624	-	LC1760CB6ATR4624	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4624	-	LC1760CB6BTR4624	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4625	-	LC1760CB6ATR4625	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4625	-	LC1760CB6BTR4625	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4626	-	LC1760CB6ATR4626	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4626	-	LC1760CB6BTR4626	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4627	-	LC1760CB6ATR4627	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4627	-	LC1760CB6BTR4627	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4628	-	LC1760CB6ATR4628	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4628	-	LC1760CB6BTR4628	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4629	-	LC1760CB6ATR4629	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4629	-	LC1760CB6BTR4629	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4630	-	LC1760CB6ATR4630	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4630	-	LC1760CB6BTR4630	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4631	-	LC1760CB6ATR4631	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4631	-	LC1760CB6BTR4631	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4632	-	LC1760CB6ATR4632	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4632	-	LC1760CB6BTR4632	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4633	-	LC1760CB6ATR4633	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4633	-	LC1760CB6BTR4633	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4634	-	LC1760CB6ATR4634	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4634	-	LC1760CB6BTR4634	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4635	-	LC1760CB6ATR4635	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4635	-	LC1760CB6BTR4635	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4636	-	LC1760CB6ATR4636	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4636	-	LC1760CB6BTR4636	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4637	-	LC1760CB6ATR4637	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4637	-	LC1760CB6BTR4637	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX4638	-	LC1760CB6ATR4638	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4638	-	LC1760CB6BTR4638	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4639	-	LC1760CB6ATR4639	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4639	-	LC1760CB6BTR4639	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4640	-	LC1760CB6ATR4640	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4640	-	LC1760CB6BTR4640	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4641	-	LC1760CB6ATR4641	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4641	-	LC1760CB6BTR4641	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4642	-	LC1760CB6ATR4642	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4642	-	LC1760CB6BTR4642	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4643	-	LC1760CB6ATR4643	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4643	-	LC1760CB6BTR4643	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4644	-	LC1760CB6ATR4644	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4644	-	LC1760CB6BTR4644	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4645	-	LC1760CB6ATR4645	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4645	-	LC1760CB6BTR4645	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4646	-	LC1760CB6ATR4646	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4646	-	LC1760CB6BTR4646	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4647	-	LC1760CB6ATR4647	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4647	-	LC1760CB6BTR4647	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4648	-	LC1760CB6ATR4648	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4648	-	LC1760CB6BTR4648	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4649	-	LC1760CB6ATR4649	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4649	-	LC1760CB6BTR4649	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4650	-	LC1760CB6ATR4650	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4650	-	LC1760CB6BTR4650	LVR-IC	LDO, Dual out, Vout1/Vout2=4.6V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4712	-	LC1760CB6ATR4712	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4712	-	LC1760CB6BTR4712	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4713	-	LC1760CB6ATR4713	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4713	-	LC1760CB6BTR4713	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4714	-	LC1760CB6ATR4714	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4714	-	LC1760CB6BTR4714	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4715	-	LC1760CB6ATR4715	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4715	-	LC1760CB6BTR4715	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4716	-	LC1760CB6ATR4716	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4716	-	LC1760CB6BTR4716	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4717	-	LC1760CB6ATR4717	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4717	-	LC1760CB6BTR4717	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4718	-	LC1760CB6ATR4718	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4718	-	LC1760CB6BTR4718	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4719	-	LC1760CB6ATR4719	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4719	-	LC1760CB6BTR4719	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4720	-	LC1760CB6ATR4720	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4720	-	LC1760CB6BTR4720	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4721	-	LC1760CB6ATR4721	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4721	-	LC1760CB6BTR4721	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4722	-	LC1760CB6ATR4722	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4722	-	LC1760CB6BTR4722	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4723	-	LC1760CB6ATR4723	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4723	-	LC1760CB6BTR4723	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4724	-	LC1760CB6ATR4724	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4724	-	LC1760CB6BTR4724	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4725	-	LC1760CB6ATR4725	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4725	-	LC1760CB6BTR4725	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4726	-	LC1760CB6ATR4726	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4726	-	LC1760CB6BTR4726	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4727	-	LC1760CB6ATR4727	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4727	-	LC1760CB6BTR4727	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4728	-	LC1760CB6ATR4728	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4728	-	LC1760CB6BTR4728	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4729	-	LC1760CB6ATR4729	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4729	-	LC1760CB6BTR4729	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4730	-	LC1760CB6ATR4730	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4730	-	LC1760CB6BTR4730	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4731	-	LC1760CB6ATR4731	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4731	-	LC1760CB6BTR4731	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4732	-	LC1760CB6ATR4732	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4732	-	LC1760CB6BTR4732	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4733	-	LC1760CB6ATR4733	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4733	-	LC1760CB6BTR4733	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX4734	-	LC1760CB6ATR4734	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4734	-	LC1760CB6BTR4734	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4735	-	LC1760CB6ATR4735	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4735	-	LC1760CB6BTR4735	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4736	-	LC1760CB6ATR4736	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4736	-	LC1760CB6BTR4736	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4737	-	LC1760CB6ATR4737	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4737	-	LC1760CB6BTR4737	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4738	-	LC1760CB6ATR4738	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4738	-	LC1760CB6BTR4738	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4739	-	LC1760CB6ATR4739	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4739	-	LC1760CB6BTR4739	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4740	-	LC1760CB6ATR4740	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4740	-	LC1760CB6BTR4740	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4741	-	LC1760CB6ATR4741	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4741	-	LC1760CB6BTR4741	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4742	-	LC1760CB6ATR4742	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4742	-	LC1760CB6BTR4742	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4743	-	LC1760CB6ATR4743	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4743	-	LC1760CB6BTR4743	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4744	-	LC1760CB6ATR4744	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4744	-	LC1760CB6BTR4744	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4745	-	LC1760CB6ATR4745	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4745	-	LC1760CB6BTR4745	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4746	-	LC1760CB6ATR4746	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4746	-	LC1760CB6BTR4746	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4747	-	LC1760CB6ATR4747	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4747	-	LC1760CB6BTR4747	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4748	-	LC1760CB6ATR4748	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4748	-	LC1760CB6BTR4748	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4749	-	LC1760CB6ATR4749	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4749	-	LC1760CB6BTR4749	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4750	-	LC1760CB6ATR4750	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4750	-	LC1760CB6BTR4750	LVR-IC	LDO, Dual out, Vout1/Vout2=4.7V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4812	-	LC1760CB6ATR4812	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4812	-	LC1760CB6BTR4812	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4813	-	LC1760CB6ATR4813	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4813	-	LC1760CB6BTR4813	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4814	-	LC1760CB6ATR4814	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4814	-	LC1760CB6BTR4814	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4815	-	LC1760CB6ATR4815	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4815	-	LC1760CB6BTR4815	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4816	-	LC1760CB6ATR4816	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4816	-	LC1760CB6BTR4816	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4817	-	LC1760CB6ATR4817	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4817	-	LC1760CB6BTR4817	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4818	-	LC1760CB6ATR4818	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4818	-	LC1760CB6BTR4818	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4819	-	LC1760CB6ATR4819	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4819	-	LC1760CB6BTR4819	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4820	-	LC1760CB6ATR4820	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4820	-	LC1760CB6BTR4820	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4821	-	LC1760CB6ATR4821	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4821	-	LC1760CB6BTR4821	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4822	-	LC1760CB6ATR4822	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4822	-	LC1760CB6BTR4822	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4823	-	LC1760CB6ATR4823	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4823	-	LC1760CB6BTR4823	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4824	-	LC1760CB6ATR4824	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4824	-	LC1760CB6BTR4824	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4825	-	LC1760CB6ATR4825	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4825	-	LC1760CB6BTR4825	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4826	-	LC1760CB6ATR4826	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4826	-	LC1760CB6BTR4826	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4827	-	LC1760CB6ATR4827	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4827	-	LC1760CB6BTR4827	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4828	-	LC1760CB6ATR4828	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4828	-	LC1760CB6BTR4828	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4829	-	LC1760CB6ATR4829	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4829	-	LC1760CB6BTR4829	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX4830	-	LC1760CB6ATR4830	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4830	-	LC1760CB6BTR4830	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4831	-	LC1760CB6ATR4831	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4831	-	LC1760CB6BTR4831	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4832	-	LC1760CB6ATR4832	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4832	-	LC1760CB6BTR4832	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4833	-	LC1760CB6ATR4833	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4833	-	LC1760CB6BTR4833	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4834	-	LC1760CB6ATR4834	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4834	-	LC1760CB6BTR4834	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4835	-	LC1760CB6ATR4835	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4835	-	LC1760CB6BTR4835	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4836	-	LC1760CB6ATR4836	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4836	-	LC1760CB6BTR4836	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4837	-	LC1760CB6ATR4837	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4837	-	LC1760CB6BTR4837	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4838	-	LC1760CB6ATR4838	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4838	-	LC1760CB6BTR4838	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4839	-	LC1760CB6ATR4839	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4839	-	LC1760CB6BTR4839	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4840	-	LC1760CB6ATR4840	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4840	-	LC1760CB6BTR4840	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4841	-	LC1760CB6ATR4841	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4841	-	LC1760CB6BTR4841	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4842	-	LC1760CB6ATR4842	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4842	-	LC1760CB6BTR4842	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4843	-	LC1760CB6ATR4843	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4843	-	LC1760CB6BTR4843	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4844	-	LC1760CB6ATR4844	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4844	-	LC1760CB6BTR4844	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4845	-	LC1760CB6ATR4845	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4845	-	LC1760CB6BTR4845	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4846	-	LC1760CB6ATR4846	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4846	-	LC1760CB6BTR4846	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4847	-	LC1760CB6ATR4847	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4847	-	LC1760CB6BTR4847	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4848	-	LC1760CB6ATR4848	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4848	-	LC1760CB6BTR4848	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4849	-	LC1760CB6ATR4849	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4849	-	LC1760CB6BTR4849	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4850	-	LC1760CB6ATR4850	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4850	-	LC1760CB6BTR4850	LVR-IC	LDO, Dual out, Vout1/Vout2=4.8V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4912	-	LC1760CB6ATR4912	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4912	-	LC1760CB6BTR4912	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4913	-	LC1760CB6ATR4913	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4913	-	LC1760CB6BTR4913	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4914	-	LC1760CB6ATR4914	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4914	-	LC1760CB6BTR4914	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4915	-	LC1760CB6ATR4915	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4915	-	LC1760CB6BTR4915	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4916	-	LC1760CB6ATR4916	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4916	-	LC1760CB6BTR4916	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4917	-	LC1760CB6ATR4917	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4917	-	LC1760CB6BTR4917	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4918	-	LC1760CB6ATR4918	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4918	-	LC1760CB6BTR4918	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4919	-	LC1760CB6ATR4919	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4919	-	LC1760CB6BTR4919	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4920	-	LC1760CB6ATR4920	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4920	-	LC1760CB6BTR4920	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4921	-	LC1760CB6ATR4921	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4921	-	LC1760CB6BTR4921	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4922	-	LC1760CB6ATR4922	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4922	-	LC1760CB6BTR4922	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4923	-	LC1760CB6ATR4923	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4923	-	LC1760CB6BTR4923	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4924	-	LC1760CB6ATR4924	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4924	-	LC1760CB6BTR4924	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4925	-	LC1760CB6ATR4925	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4925	-	LC1760CB6BTR4925	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX4926	-	LC1760CB6ATR4926	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4926	-	LC1760CB6BTR4926	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4927	-	LC1760CB6ATR4927	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4927	-	LC1760CB6BTR4927	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4928	-	LC1760CB6ATR4928	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4928	-	LC1760CB6BTR4928	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4929	-	LC1760CB6ATR4929	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4929	-	LC1760CB6BTR4929	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4930	-	LC1760CB6ATR4930	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4930	-	LC1760CB6BTR4930	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4931	-	LC1760CB6ATR4931	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4931	-	LC1760CB6BTR4931	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4932	-	LC1760CB6ATR4932	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4932	-	LC1760CB6BTR4932	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4933	-	LC1760CB6ATR4933	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4933	-	LC1760CB6BTR4933	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4934	-	LC1760CB6ATR4934	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4934	-	LC1760CB6BTR4934	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4935	-	LC1760CB6ATR4935	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4935	-	LC1760CB6BTR4935	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4936	-	LC1760CB6ATR4936	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4936	-	LC1760CB6BTR4936	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4937	-	LC1760CB6ATR4937	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4937	-	LC1760CB6BTR4937	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4938	-	LC1760CB6ATR4938	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4938	-	LC1760CB6BTR4938	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4939	-	LC1760CB6ATR4939	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4939	-	LC1760CB6BTR4939	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4940	-	LC1760CB6ATR4940	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4940	-	LC1760CB6BTR4940	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4941	-	LC1760CB6ATR4941	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4941	-	LC1760CB6BTR4941	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4942	-	LC1760CB6ATR4942	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4942	-	LC1760CB6BTR4942	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4943	-	LC1760CB6ATR4943	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4943	-	LC1760CB6BTR4943	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4944	-	LC1760CB6ATR4944	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4944	-	LC1760CB6BTR4944	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4945	-	LC1760CB6ATR4945	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4945	-	LC1760CB6BTR4945	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4946	-	LC1760CB6ATR4946	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4946	-	LC1760CB6BTR4946	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4947	-	LC1760CB6ATR4947	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4947	-	LC1760CB6BTR4947	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4948	-	LC1760CB6ATR4948	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4948	-	LC1760CB6BTR4948	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4949	-	LC1760CB6ATR4949	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4949	-	LC1760CB6BTR4949	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX4950	-	LC1760CB6ATR4950	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX4950	-	LC1760CB6BTR4950	LVR-IC	LDO, Dual out, Vout1/Vout2=4.9V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5012	-	LC1760CB6ATR5012	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5012	-	LC1760CB6BTR5012	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5013	-	LC1760CB6ATR5013	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5013	-	LC1760CB6BTR5013	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5014	-	LC1760CB6ATR5014	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5014	-	LC1760CB6BTR5014	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5015	-	LC1760CB6ATR5015	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5015	-	LC1760CB6BTR5015	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5016	-	LC1760CB6ATR5016	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5016	-	LC1760CB6BTR5016	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5017	-	LC1760CB6ATR5017	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5017	-	LC1760CB6BTR5017	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5018	-	LC1760CB6ATR5018	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5018	-	LC1760CB6BTR5018	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5019	-	LC1760CB6ATR5019	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5019	-	LC1760CB6BTR5019	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/1.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5020	-	LC1760CB6ATR5020	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5020	-	LC1760CB6BTR5020	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5021	-	LC1760CB6ATR5021	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5021	-	LC1760CB6BTR5021	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX5022	-	LC1760CB6ATR5022	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5022	-	LC1760CB6BTR5022	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5023	-	LC1760CB6ATR5023	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5023	-	LC1760CB6BTR5023	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5024	-	LC1760CB6ATR5024	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5024	-	LC1760CB6BTR5024	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5025	-	LC1760CB6ATR5025	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5025	-	LC1760CB6BTR5025	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5026	-	LC1760CB6ATR5026	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5026	-	LC1760CB6BTR5026	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5027	-	LC1760CB6ATR5027	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5027	-	LC1760CB6BTR5027	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5028	-	LC1760CB6ATR5028	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5028	-	LC1760CB6BTR5028	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5029	-	LC1760CB6ATR5029	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5029	-	LC1760CB6BTR5029	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5030	-	LC1760CB6ATR5030	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5030	-	LC1760CB6BTR5030	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5031	-	LC1760CB6ATR5031	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5031	-	LC1760CB6BTR5031	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5032	-	LC1760CB6ATR5032	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5032	-	LC1760CB6BTR5032	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5033	-	LC1760CB6ATR5033	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5033	-	LC1760CB6BTR5033	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5034	-	LC1760CB6ATR5034	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5034	-	LC1760CB6BTR5034	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5035	-	LC1760CB6ATR5035	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5035	-	LC1760CB6BTR5035	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5036	-	LC1760CB6ATR5036	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5036	-	LC1760CB6BTR5036	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5037	-	LC1760CB6ATR5037	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5037	-	LC1760CB6BTR5037	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5038	-	LC1760CB6ATR5038	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5038	-	LC1760CB6BTR5038	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5039	-	LC1760CB6ATR5039	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5039	-	LC1760CB6BTR5039	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5040	-	LC1760CB6ATR5040	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5040	-	LC1760CB6BTR5040	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5041	-	LC1760CB6ATR5041	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.1V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5041	-	LC1760CB6BTR5041	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.1V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5042	-	LC1760CB6ATR5042	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.2V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5042	-	LC1760CB6BTR5042	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5043	-	LC1760CB6ATR5043	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.3V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5043	-	LC1760CB6BTR5043	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5044	-	LC1760CB6ATR5044	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.4V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5044	-	LC1760CB6BTR5044	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.4V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5045	-	LC1760CB6ATR5045	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.5V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5045	-	LC1760CB6BTR5045	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.5V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5046	-	LC1760CB6ATR5046	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.6V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5046	-	LC1760CB6BTR5046	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5047	-	LC1760CB6ATR5047	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.7V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5047	-	LC1760CB6BTR5047	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.7V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5048	-	LC1760CB6ATR5048	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.8V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5048	-	LC1760CB6BTR5048	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5049	-	LC1760CB6ATR5049	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.9V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5049	-	LC1760CB6BTR5049	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/4.9V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KX5050	-	LC1760CB6ATR5050	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.0V±2%, 150mA, +CE	SOT-23-6	33rg	VR19	7b	Lch
KX5050	-	LC1760CB6BTR5050	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7ba	Lch
KY	-	R5426D112EA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.12V	SON-6	xk	VBM1	7g	Ric
KY	-	R5426N112EA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.12V	SOT-23-6	xk	VBM1	7da	Ric
KY1	-	BZX84C11S	Z-diode	Dual, 10.4..11.6V, Zzt=20Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KY2	-	BZX84C12S	Z-diode	Dual, 11.4..12.7V, Zzt=25Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KY3	-	BZX84C13S	Z-diode	Dual, 12.4..14.1V, Zzt=30Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KY4	-	BZX84C15S	Z-diode	Dual, 13.8..15.6V, Zzt=30Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KY5	-	BZX84C16S	Z-diode	Dual, 15.3..17.1V, Zzt=40Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KY6	-	BZX84C18S	Z-diode	Dual, 16.8..19.1V, Zzt=45Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KY7	-	BZX84C20S	Z-diode	Dual, 18.8..21.2V, Zzt=55Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KY8	-	BZX84C22S	Z-diode	Dual, 20.8..23.3V, Zzt=55Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KY9	-	BZX84C24S	Z-diode	Dual, 22.8..25.6V, Zzt=70Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KYA	-	BZX84C27S	Z-diode	Dual, 25.1..28.9V, Zzt=80Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KYB	-	BZX84C30S	Z-diode	Dual, 28..32V, Zzt=80Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KYC	-	BZX84C33S	Z-diode	Dual, 31..35V, Zzt=80Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KYD	-	BZX84C36S	Z-diode	Dual, 34..38V, Zzt=90Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KYE	-	BZX84C39S	Z-diode	Dual, 37..41V, Zzt=130Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZ	-	R5426D116DA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.16V	SON-6	xk	VBM1	7g	Ric
KZ	-	R5426N116DA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.16V	SOT-23-6	xk	VBM1	7da	Ric
KZ1	-	BZX84C4V7S	Z-diode	Dual, 4.4..5.0V, Zzt=80Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZ2	-	BZX84C5V1S	Z-diode	Dual, 4.8..5.4V, Zzt=60Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZ3	-	BZX84C5V6S	Z-diode	Dual, 5.2..6.0V, Zzt=40Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZ4	-	BZX84C6V2S	Z-diode	Dual, 5.8..6.6V, Zzt=10Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZ5	-	BZX84C6V8S	Z-diode	Dual, 6.4..7.2V, Zzt=15Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZ6	-	BZX84C7V5S	Z-diode	Dual, 7.0..7.9V, Zzt=15Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZ7	-	BZX84C8V2S	Z-diode	Dual, 7.7..8.7V, Zzt=15Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZ8	-	BZX84C9V1S	Z-diode	Dual, 8.5..9.6V, Zzt=15Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZ9	-	BZX84C10S	Z-diode	Dual, 9.4..10.6V, Zzt=20Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZB	-	BZX84C2V4S	Z-diode	Dual, 2.2..2.6V, Zzt=100Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZC	-	BZX84C2V7S	Z-diode	Dual, 2.5..2.9V, Zzt=100Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZD	-	BZX84C3V0S	Z-diode	Dual, 2.8..3.2V, Zzt=95Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZE	-	BZX84C3V3S	Z-diode	Dual, 3.1..3.5V, Zzt=95Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZF	-	BZX84C3V6S	Z-diode	Dual, 3.4..3.8V, Zzt=90Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZG	-	BZX84C3V9S	Z-diode	Dual, 3.7..4.1V, Zzt=90Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZH	-	BZX84C4V3S	Z-diode	Dual, 4.0..4.6V, Zzt=90Ω, Izt=5mA, 200mW	SOT-363	33dn	-	7o	Di
KZZ	-	PZX363C3V9	Z-diode	5x 3.9V±10%, 200mW	SOT-363	33	D17	7k	Di
L0	-	R1211D002A	DC-DC-IC	PWM step-up, ULVO=2.2V, 700kHz	SON-6	sf	DC15	7da	Ric
L0	-	R1211N002A	DC-DC-IC	PWM step-up, ULVO=2.2V, 700kHz	SOT-23-6W	se	DC15	7da	Ric
L00	-	HD74LV2G00AUS	CMOS-Log	Dual 2-input NAND gates	SSOP-8	47	Log50	8c	Ren
L02	-	HD74LV2G02AUS	CMOS-Log	Dual 2-input NOR gates	SSOP-8	47	Log53	8c	Ren
L020	-	R1190S020B	LVR-IC	2.0V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L021	-	R1190S021B	LVR-IC	2.1V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L022	-	R1190S022B	LVR-IC	2.2V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L023	-	R1190S023B	LVR-IC	2.3V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L024	-	R1190S024B	LVR-IC	2.5V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L025	-	R1190S025B	LVR-IC	2.6V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L026	-	R1190S026B	LVR-IC	2.7V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L027	-	R1190S027B	LVR-IC	2.8V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L028	-	R1190S028B	LVR-IC	2.9V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L029	-	R1190S029B	LVR-IC	2.0V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L030	-	R1190S030B	LVR-IC	3.1V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L031	-	R1190S031B	LVR-IC	3.2V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L032	-	R1190S032B	LVR-IC	3.3V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L033	-	R1190S033B	LVR-IC	3.4V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L034	-	R1190S034B	LVR-IC	3.5V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L035	-	R1190S035B	LVR-IC	3.6V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L036	-	R1190S036B	LVR-IC	3.7V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L037	-	R1190S037B	LVR-IC	3.8V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L038	-	R1190S038B	LVR-IC	3.9V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L039	-	R1190S039B	LVR-IC	3.0V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L04	-	HD74LV2G04AUS	CMOS-Log	Triple inverters	SSOP-8	47	Log56	8c	Ren
L040	-	R1190S040B	LVR-IC	4.1V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L041	-	R1190S041B	LVR-IC	4.2V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L042	-	R1190S042B	LVR-IC	4.3V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L043	-	R1190S043B	LVR-IC	4.4V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L044	-	R1190S044B	LVR-IC	4.5V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L045	-	R1190S045B	LVR-IC	4.6V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L046	-	R1190S046B	LVR-IC	4.7V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L047	-	R1190S047B	LVR-IC	4.8V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L048	-	R1190S048B	LVR-IC	4.9V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L049	-	R1190S049B	LVR-IC	4.0V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L050	-	R1190S050B	LVR-IC	5.1V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L051	-	R1190S051B	LVR-IC	5.2V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L052	-	R1190S052B	LVR-IC	5.3V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L054	-	R1190S054B	LVR-IC	5.4V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L055	-	R1190S055B	LVR-IC	5.5V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L056	-	R1190S056B	LVR-IC	5.6V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L057	-	R1190S057B	LVR-IC	5.7V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L058	-	R1190S058B	LVR-IC	5.8V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L059	-	R1190S059B	LVR-IC	5.9V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L060	-	R1190S060B	LVR-IC	6.0V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L061	-	R1190S061B	LVR-IC	6.1V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L062	-	R1190S062B	LVR-IC	6.2V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L063	-	R1190S063B	LVR-IC	6.3V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L064	-	R1190S064B	LVR-IC	6.4V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L065	-	R1190S065B	LVR-IC	6.5V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L066	-	R1190S066B	LVR-IC	6.6V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L067	-	R1190S067B	LVR-IC	6.7V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L068	-	R1190S068B	LVR-IC	6.8V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L069	-	R1190S069B	LVR-IC	6.9V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L070	-	R1190S070B	LVR-IC	7.0V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L071	-	R1190S071B	LVR-IC	7.1V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L072	-	R1190S072B	LVR-IC	7.2V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L073	-	R1190S073B	LVR-IC	7.3V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L074	-	R1190S074B	LVR-IC	7.4V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L075	-	R1190S075B	LVR-IC	7.5V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L076	-	R1190S076B	LVR-IC	7.6V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L077	-	R1190S077B	LVR-IC	7.7V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L078	-	R1190S078B	LVR-IC	7.8V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L079	-	R1190S079B	LVR-IC	7.9V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L08	-	HD74LV2G08AUS	CMOS-Log	Dual 2-input AND gates	SSOP-8	47	Log51	8c	Ren
L080	-	R1190S080B	LVR-IC	8.0V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L081	-	R1190S081B	LVR-IC	8.1V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L082	-	R1190S082B	LVR-IC	8.2V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L083	-	R1190S083B	LVR-IC	8.3V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L084	-	R1190S084B	LVR-IC	8.4V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L085	-	R1190S085B	LVR-IC	8.5V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L086	-	R1190S086B	LVR-IC	8.6V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L087	-	R1190S087B	LVR-IC	8.7V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L088	-	R1190S088B	LVR-IC	8.8V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L089	-	R1190S089B	LVR-IC	8.9V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L090	-	R1190S090B	LVR-IC	9.0V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L091	-	R1190S091B	LVR-IC	9.1V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L092	-	R1190S092B	LVR-IC	9.2V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L093	-	R1190S093B	LVR-IC	9.3V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L094	-	R1190S094B	LVR-IC	9.4V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L095	-	R1190S095B	LVR-IC	9.5V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L096	-	R1190S096B	LVR-IC	9.6V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L097	-	R1190S097B	LVR-IC	9.7V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L098	-	R1190S098B	LVR-IC	9.8V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L099	-	R1190S099B	LVR-IC	9.9V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L1	-	NL27WZ00US	CMOS-Log	Dual 2-input NAND gates	SOP-8	47	Log50	8a	Ons
L1	-	R1211D002B	DC-DC-IC	PWM step-up, ULVO=2.2V, 700kHz	SON-6	si	DC15	7da	Ric
L1	-	R1211N002B	DC-DC-IC	PWM step-up, ULVO=2.2V, 700kHz	SOT-23-6W	sl	DC15	7da	Ric
L100	-	R1190S100B	LVR-IC	10.0V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L101	-	R1190S101B	LVR-IC	10.1V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L102	-	R1190S102B	LVR-IC	10.2V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L103	-	R1190S103B	LVR-IC	10.3V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L104	-	R1190S104B	LVR-IC	10.4V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L105	-	R1190S105B	LVR-IC	10.5V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L106	-	R1190S106B	LVR-IC	10.6V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L107	-	R1190S107B	LVR-IC	10.7V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L108	-	R1190S108B	LVR-IC	10.8V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L109	-	R1190S109B	LVR-IC	10.9V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L110	-	R1190S110B	LVR-IC	11.0V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L111	-	R1190S111B	LVR-IC	11.1V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L112	-	R1190S112B	LVR-IC	11.2V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L113	-	R1190S113B	LVR-IC	11.3V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L114	-	R1190S114B	LVR-IC	11.4V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L115	-	R1190S115B	LVR-IC	11.5V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L116	-	R1190S116B	LVR-IC	11.6V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L117	-	R1190S117B	LVR-IC	11.7V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L118	-	R1190S118B	LVR-IC	11.8V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L119	-	R1190S119B	LVR-IC	11.9V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L120	-	R1190S120B	LVR-IC	12.0V±1.5%, 1A, +CE	HSOP-6J	zu	VR7	7h	Ric
L14	-	HD74LV2G14AUS	CMOS-Log	Triple Schmitt-trigger inverters	SSOP-8	47	Log57	8c	Ren
L1U	-	ADP3333ARMZ-1.8-R	LVR-IC	LDO, 1.8V±1.8%, 300mA, -Shutdown	MSOP-8	55c6	VR4	8d	Ad
L1V	-	ADP3333ARMZ-2.5-R	LVR-IC	LDO, 2.5V±1.8%, 300mA, -Shutdown	MSOP-8	55c6	VR4	8d	Ad
L1W	-	ADP3333ARMZ-3-R	LVR-IC	LDO, 3.0V±1.8%, 300mA, -Shutdown	MSOP-8	55c6	VR4	8d	Ad
L1X	-	ADP3333ARMZ-1.5-R	LVR-IC	LDO, 1.5V±1.8%, 300mA, -Shutdown	MSOP-8	55c6	VR4	8d	Ad
L1Y	-	ADP3333ARMZ-2.77R	LVR-IC	LDO, 2.77V±1.8%, 300mA, -Shutdown	MSOP-8	55c6	VR4	8d	Ad
L1Z	-	ADP3333ARMZ-3.15R	LVR-IC	LDO, 3.15V±1.8%, 300mA, -Shutdown	MSOP-8	55c6	VR4	8d	Ad
L2	-	NL27WZ08US	CMOS-Log	Dual 2-input AND gates	SOP-8	47	Log51	8a	Ons

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L2	-	R1211D002C	DC-DC-IC	PWM step-up, ULVO=2.2V, 300kHz	SON-6	sf	DC15	7da	Ric
L2	-	R1211N002C	DC-DC-IC	PWM step-up, ULVO=2.2V, 300kHz	SOT-23-6W	se	DC15	7da	Ric
L20	-	ADP3333ARMZ-3.3-R	LVR-IC	LDO, 3.3V±1.8%, 300mA, -Shutdown	MSOP-8	55c6	VR4	8d	Ad
L21	-	ADP3333ARMZ-5-R	LVR-IC	LDO, 5.0V±1.8%, 300mA, -Shutdown	MSOP-8	55c6	VR4	8d	Ad
L23	-	HD74LV2G123AUS	CMOS-Log	Retriggerable monostable multivibrator	SSOP-8	47	Log75	8c	Ren
L25	-	HD74LV2G125AUS	CMOS-Log	Dual bus buffer with 3-state output	SSOP-8	47	Log54	8c	Ren
L26	-	HD74LV2G126AUS	CMOS-Log	Dual bus buffer with 3-state output	SSOP-8	47	Log55	8c	Ren
L3	-	NL27WZ02US	CMOS-Log	Dual 2-input NOR gates	SOP-8	47	Log53	8a	Ons
L3	-	R1211D002D	DC-DC-IC	PWM step-up, ULVO=2.2V, 300kHz	SON-6	si	DC15	7da	Ric
L3	-	R1211N002D	DC-DC-IC	PWM step-up, ULVO=2.2V, 300kHz	SOT-23-6W	sl	DC15	7da	Ric
L32	-	HD74LV2G32AUS	CMOS-Log	Dual 2-input OR gates	SSOP-8	47	Log52	8c	Ren
L34	-	HD74LV2G34AUS	CMOS-Log	Triple non-inverter buffers	SSOP-8	47	Log69	8c	Ren
L39A	-	LP2986AIMM-3.0	LVR-IC	Ultra-LDO, +CE, -Error, 3V±0.5%, 200mA	SOP-8	47wa	-	8d	Nsc
L39B	-	LP2986IMM-3.0	LVR-IC	Ultra-LDO, +CE, -Error, 3V±1%, 200mA	SOP-8	47wa	-	8d	Nsc
L4	-	BAT54TW	Si-diode	Triple, SBD, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-363	33bb	-	7f	Pjt
L4	-	NC7SP86L6	CMOS-Log	2-input EXCLUSIVE-OR gate	MPAK-6	33	Log5	7b	F
L4	-	NL27WZ32US	CMOS-Log	Dual 2-input OR gates	SOP-8	47	Log52	8a	Ons
L4	-	R1211D100A	DC-DC-IC	PWM step-up, ULVO=2.2V, 700kHz	SON-6	sf	DC15	7da	Ric
L40	-	HD74LV2G240AUS	CMOS-Log	Dual bus buffer inverted with 3-state output	SSOP-8	47	Log67	8c	Ren
L40A	-	LP2986AIMM-3.3	LVR-IC	Ultra-LDO, +CE, -Error, 3.3V±0.5%, 200mA	SOP-8	47wa	-	8d	Nsc
L40B	-	LP2986IMM-3.3	LVR-IC	Ultra-LDO, +CE, -Error, 3.3V±1%, 200mA	SOP-8	47wa	-	8d	Nsc
L41	-	HD74LV2G241AUS	CMOS-Log	Dual bus buffer non-inverted with 3-state output	SSOP-8	47	Log60	8c	Ren
L41A	-	LP2986AIMM-5.0	LVR-IC	Ultra-LDO, +CE, -Error, 5V±0.5%, 200mA	SOP-8	47wa	-	8d	Nsc
L41B	-	LP2986IMM-5.0	LVR-IC	Ultra-LDO, +CE, -Error, 5V±1%, 200mA	SOP-8	47wa	-	8d	Nsc
L42	-	BAT54ADW	Si-diode	Quad, SBD, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-363	33	D8	7f	Pjt
L43	-	BAT54CDW	Si-diode	Quad, SBD, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-363	33	D7	7f	Pjt
L44	-	BAT54SDW	Si-diode	Quad, SBD, 30V, 200mA, Vf<1V(100mA), <5ns	SOT-363	33	D10	7f	Pjt
L45	-	HD74LV2G245AUS	CMOS-Log	Dual bus transceivers with 3-state output	SSOP-8	47	Log74	8c	Ren
L48100Q	-	LM48100QMH	Lin-IC	AF PA, BTL, 3..5.5V, 1.3W(4V/8Ω), shutdown, I2C control	TSSOP-14	60	AFP8	8d	Nsc
L4917MT	-	LM4917MT	Lin-IC	AF PA, 2.2..5.5V, 2x95mW(5V/16Ω), shutdown	SSOP-14	60	-	8d	Nsc
L4990	-	LM4990MH	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(5V/4Ω), shutdown	SSOP-10	60	AFP26	8d	Nsc
L5	-	NL37WZ04US	CMOS-Log	Triple inverters	SOP-8	47	Log56	8a	Ons
L5	-	R1211D101A	DC-DC-IC	PWM step-up, ULVO=2.2V, 700kHz	SON-6	sf	DC15	7da	Ric
L53	-	HD74LV2G53AUS	CMOS-Log	2-channel analog multiplexer/demultiplexer	SSOP-8	47	Log58	8c	Ren
L57	-	HD74LV2G157AUS	CMOS-Log	2-input multiplexer	SSOP-8	47	Log66	8c	Ren
L6	-	R1211D102A	DC-DC-IC	PWM step-up, ULVO=2.2V, 700kHz	SON-6	sf	DC15	7da	Ric
L66	-	HD74LV2G66AUS	CMOS-Log	2-channel analog switch	SSOP-8	47	Log68	8c	Ren
L6A	-	S-1112B15PI-L6ATFG	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6B	-	S-1112B16PI-L6BTFG	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6C	-	S-1112B17PI-L6CTFG	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6D	-	S-1112B18PI-L6DTFG	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6E	-	S-1112B19PI-L6ETFG	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6F	-	S-1112B20PI-L6FTFG	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6G	-	S-1112B21PI-L6GTFG	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6H	-	S-1112B22PI-L6HTFG	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6I	-	S-1112B23PI-L6ITFG	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6J	-	S-1112B24PI-L6JTFG	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6K	-	S-1112B25PI-L6KTFG	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6L	-	S-1112B26PI-L6LTFG	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6M	-	S-1112B27PI-L6MTFG	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6N	-	S-1112B28PI-L6NTFG	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6O	-	S-1112B29PI-L6OTFG	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6P	-	S-1112B30PI-L6PTFG	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6Q	-	S-1112B31PI-L6QTFG	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6R	-	S-1112B32PI-L6RTFG	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6S	-	S-1112B33PI-L6STFG	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6T	-	S-1112B34PI-L6TTFG	LVR-IC	LDO, 3.4V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6U	-	S-1112B35PI-L6UTFG	LVR-IC	LDO, 3.5V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6V	-	S-1112B36PI-L6VTFG	LVR-IC	LDO, 3.6V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6W	-	S-1112B37PI-L6WTFG	LVR-IC	LDO, 3.7V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6X	-	S-1112B38PI-L6XTFG	LVR-IC	LDO, 3.8V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6Y	-	S-1112B39PI-L6YTFG	LVR-IC	LDO, 3.9V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L6Z	-	S-1112B40PI-L6ZTFG	LVR-IC	LDO, 4.0V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L7	-	NL37WZ07US	CMOS-Log	Triple noninverting buffers/drivers (ODO)	SOP-8	47	Log73	8a	Ons
L7	-	NLAS2066US	Lin-IC	Dual SPST analog switch, 1.65..5.5V, 15Ω(3V)	US8	47	-	8b	Ons
L7	-	R1211D101C	DC-DC-IC	PWM step-up, ULVO=2.2V, 300kHz	SON-6	sf	DC15	7da	Ric
L74	-	HD74LV2G74AUS	CMOS-Log	D-type flip-flop with preset and clear	SSOP-8	47	Log59	8c	Ren
L7A	-	S-1112B41PI-L7ATFG	LVR-IC	LDO, 4.1V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L7B	-	S-1112B42PI-L7BTFG	LVR-IC	LDO, 4.2V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L7C	-	S-1112B43PI-L7CTFG	LVR-IC	LDO, 4.3V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L7D	-	S-1112B44PI-L7DTFG	LVR-IC	LDO, 4.4V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L7E	-	S-1112B45PI-L7ETFG	LVR-IC	LDO, 4.5V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L7F	-	S-1112B46PI-L7FTFG	LVR-IC	LDO, 4.6V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L7G	-	S-1112B47PI-L7GTFG	LVR-IC	LDO, 4.7V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L7H	-	S-1112B48PI-L7HTFG	LVR-IC	LDO, 4.8V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L7I	-	S-1112B49PI-L7ITFG	LVR-IC	LDO, 4.9V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L7J	-	S-1112B50PI-L7JTFG	LVR-IC	LDO, 5.0V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L7K	-	S-1112B51PI-L7KTFG	LVR-IC	LDO, 5.1V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L7L	-	S-1112B52PI-L7LTFG	LVR-IC	LDO, 5.2V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L7M	-	S-1112B53PI-L7MTFG	LVR-IC	LDO, 5.3V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L7N	-	S-1112B54PI-L7NTFG	LVR-IC	LDO, 5.4V±1.0%, 150mA, +CE	SNT-6A	35vr2	VR4	7g	Sii
L8	-	NL27WZ86US	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	SOP-8	47	Log65	8a	Ons
L8	-	R1131D081B	LVR-IC	LDO, 0.8V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
L8	-	R1211D102C	DC-DC-IC	PWM step-up, ULVO=2.2V, 300kHz	SON-6	sf	DC15	7da	Ric
L9	-	R1131D091B	LVR-IC	LDO, 0.9V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
L9	-	R1211D103A	DC-DC-IC	PWM step-up, ULVO=2.2V, 700kHz	SON-6	sf	DC15	7da	Ric
La	-	AX6605ACA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5/2.8V±2%, 200mA, +CE	SOT-23-6	33rg	VR19	7p	Axl
LA	-	µPA605T	Si-pnp	Dual, 60V, 100mA, 180MHz	SOT-23-6	33	T10	7b	Nec
LA	-	µPA671T	Si-pnp	Dual, 60V, 100mA, 180MHz	SC-95	33	T10	7b	Nec
LA	-	AX6604ACA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7p	Axl
LA	-	KRC851F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=4.7k/4.7k	TFS6	35	TD3	7b	Kec
LA	-	LR6155E6-AC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LA	-	LR6155E6-AD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LA	-	R1211D103C	DC-DC-IC	PWM step-up, ULVO=2.2V, 300kHz	SON-6	sf	DC15	7da	Ric
LA	-	RP154N001B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
Lb	-	AX6605BCA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8/2.8V±2%, 200mA, +CE	SOT-23-6	33rg	VR19	7p	Axl
LB	-	AX6604BCA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7p	Axl
LB	-	KRC852F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=10k/10k	TFS6	35	TD3	7b	Kec
LB	-	LR6155E6-BC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LB	-	LR6155E6-BD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LB	-	R1211D104A	DC-DC-IC	PWM step-up, ULVO=2.2V, 700kHz	SON-6	sf	DC15	7da	Ric
LB	-	RP154N002B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
Lc	-	AX6605CCA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8/2.6V±2%, 200mA, +CE	SOT-23-6	33rg	VR19	7p	Axl
LC	-	AX6604CCA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7p	Axl
LC	-	KRC853F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=22k/22k	TFS6	35	TD3	7b	Kec
LC	-	LR6155E6-CC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LC	-	LR6155E6-CD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LC	-	RP154N003B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
Ld	-	AX6605DCA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8/3.3V±2%, 200mA, +CE	SOT-23-6	33rg	VR19	7p	Axl
LD	-	AX6604DCA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7p	Axl
LD	-	KRC854F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=47k/47k	TFS6	35	TD3	7b	Kec
LD	-	LR6155E6-DC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LD	-	LR6155E6-DD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LD	-	RP154N004B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
Le	-	AX6605ECA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5/2.8V±2%, 200mA, +CE	SOT-23-6	33rg	VR19	7p	Axl
LE	-	AAT3221IJS-3.2	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	SC70JW-8	33	VR4	7c	Sky
LE	-	AX6604ECA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7p	Axl
LE	-	LR6155E6-EC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.0V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LE	-	LR6155E6-ED	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/4.0V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LE	-	RP154N005B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
Lf	-	AX6605FCA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8/1.2V±2%, 200mA, +CE	SOT-23-6	33rg	VR19	7p	Axl
LF	-	AX6604FCA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7p	Axl
LF	-	LR6155E6-FC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LF	-	LR6155E6-FD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LF	-	NL37WZ06US	CMOS-Log	Triple inverters (ODO)	SOP-8	47	Log72	8a	Ons
LF	-	RP154N006B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
LFBB	-	MIC5211-1.8BM6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFBB	hc	MIC5211-1.8YM6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFBC	-	MIC5211-1.8/2.5BM6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFBC	hc	MIC5211-1.8/2.5YM6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFBL	-	MIC5211-1.8/3.3BM6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFBL	hc	MIC5211-1.8/3.3YM6	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFCC	-	MIC5211-2.5BM6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFCC	hc	MIC5211-2.5YM6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFCL	-	MIC5211-2.5/3.3BM6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFCL	hc	MIC5211-2.5/3.3YM6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFDD	-	MIC5211-2.7BM6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFDD	hc	MIC5211-2.7YM6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFEE	-	MIC5211-2.8BM6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFEE	hc	MIC5211-2.8YM6	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LFGG	-	MIC5211-3.0BM6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFGG	hc	MIC5211-3.0YM6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFLL	-	MIC5211-3.3BM6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFLL	hc	MIC5211-3.3YM6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFLX	-	MIC5211-3.3/5.0BM6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFLX	hc	MIC5211-3.3/5.0YM6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFQQ	-	MIC5211-3.6BM6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFQQ	hc	MIC5211-3.6YM6	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFXX	-	MIC5211-5.0BM5	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.0V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
LFXX	hc	MIC5211-5.0YM5	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/5.0V±1.5%, 50mA, +CE	SOT-23-6	33yf	VR19	7b	Mcr
Lg	-	AX6605GCA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8/1.8V±2%, 200mA, +CE	SOT-23-6	33rg	VR19	7p	Axl
LG	-	AX6604GCA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7p	Axl
LG	-	KRC857F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=10k/47k	TFS6	35	TD3	7b	Kec
LG	-	LR6155E6-GC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LG	-	LR6155E6-GD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LG	-	RP154N007B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
Lh	-	AX6605HCA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8/3.0V±2%, 200mA, +CE	SOT-23-6	33rg	VR19	7p	Axl
LH	-	AX6604HCA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7p	Axl
LH	-	KRC858F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=22k/47k	TFS6	35	TD3	7b	Kec
LH	-	LR6155E6-HC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LH	-	LR6155E6-HD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LH	-	RP154N008B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
LI	-	LR6155E6-IC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LI	-	LR6155E6-ID	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
Lj	-	AX6605JCA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8/3.3V±2%, 200mA, +CE	SOT-23-6	33rg	VR19	7p	Axl
LJ	-	AX6604JCA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7p	Axl
LJ	-	KRC859F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=47k/22k	TFS6	35	TD3	7b	Kec
LJ	-	LR6155E6-JC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LJ	-	LR6155E6-JD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LJ	-	RP154N009B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
Lk	-	AX6605KCA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0/3.0V±2%, 200mA, +CE	SOT-23-6	33rg	VR19	7p	Axl
LK	-	AX6604KCA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7p	Axl
LK	-	KRC860F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=4.7k	TFS6	35	TD3	7b	Kec
LK	-	LR6155E6-KC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LK	-	LR6155E6-KD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LK	-	RP154N010B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
LKA	-	ADP3333ARM-1.5-R	LVR-IC	LDO, 1.5V±1.8%, 300mA, -Shutdown	MSOP-8	55c6	VR4	8d	Ad
LKB	-	ADP3333ARM-1.8-R	LVR-IC	LDO, 1.8V±1.8%, 300mA, -Shutdown	MSOP-8	55c6	VR4	8d	Ad
LKC	-	ADP3333ARM-2.5-R	LVR-IC	LDO, 2.5V±1.8%, 300mA, -Shutdown	MSOP-8	55c6	VR4	8d	Ad
LKD	-	ADP3333ARM-2.77-R	LVR-IC	LDO, 2.77V±1.8%, 300mA, -Shutdown	MSOP-8	55c6	VR4	8d	Ad
LKE	-	ADP3333ARM-3-R	LVR-IC	LDO, 3.0V±1.8%, 300mA, -Shutdown	MSOP-8	55c6	VR4	8d	Ad
LKF	-	ADP3333ARM-3.15-R	LVR-IC	LDO, 3.15V±1.8%, 300mA, -Shutdown	MSOP-8	55c6	VR4	8d	Ad
LKG	-	ADP3333ARM-3.3-R	LVR-IC	LDO, 3.3V±1.8%, 300mA, -Shutdown	MSOP-8	55c6	VR4	8d	Ad
LKH	-	ADP3333ARM-5-R	LVR-IC	LDO, 5.0V±1.8%, 300mA, -Shutdown	MSOP-8	55c6	VR4	8d	Ad
Ll	-	AX6605LCA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0/3.3V±2%, 200mA, +CE	SOT-23-6	33rg	VR19	7p	Axl
LL	-	AX6604LCA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7p	Axl
LL	-	KRC861F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=10k	TFS6	35	TD3	7b	Kec
LL	-	LR6155E6-LC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LL	-	LR6155E6-LD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LL	-	RP154N011B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
LL20	-	ZLLS2000TA	Si-diode	SBR, 40V, 2.2A, Vf<0.54V(2A)	SOT-23-6	33bp	-	7b	Zx
Lm	-	AX6605MCA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3/3.3V±2%, 200mA, +CE	SOT-23-6	33rg	VR19	7p	Axl
LM	-	AX6604MCA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7p	Axl
LM	-	LR6155E6-MC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LM	-	LR6155E6-MD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LM	-	RP154N012B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
LN	-	KRC863F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=22k	TFS6	35	TD3	7b	Kec
LN	-	LR6155E6-NC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LN	-	LR6155E6-ND	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LN	-	RP154N013B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
LO	-	LR6155E6-OC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LO	-	LR6155E6-OD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
Lp	-	AX6605PCA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8/3.0V±2%, 200mA, +CE	SOT-23-6	33rg	VR19	7p	Axl
LP	-	AX6604PCA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7p	Axl
LP	-	KRC864F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=47k	TFS6	35	TD3	7b	Kec
LP	-	LR6155E6-PC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LP	-	LR6155E6-PD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LP	-	RP154N014B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
Lq	-	AX6605QCA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5/2.5V±2%, 200mA, +CE	SOT-23-6	33rg	VR19	7p	Axl
LQ	-	AX6604QCA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7p	Axl





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LQ	-	LR6155E6-QC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LQ	-	LR6155E6-QD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LQ	-	RP154N015B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
LR	-	LR6155E6-RC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LR	-	LR6155E6-RD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LR	-	NL37WZ16US	CMOS-Log	Triple non-inverter buffers	SOP-8	47	Log69	8a	Ons
LR	-	RP154N016B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
LS	-	LR6155E6-SC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LS	-	LR6155E6-SD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LS	-	RP154N017B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
LT	-	LR6155E6-TC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LT	-	LR6155E6-TD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LT	-	RP154N018B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
LTAA	-	LT1460CCMS8-2.5	Vref-IC	µPower, Precision, Series, 2.5V±0.075%	MS8	47af	VR1	8d	Ltc
LTAB	-	LT1460FCMS8-2.5	Vref-IC	µPower, Precision, Series, 2.5V±0.075%	MS8	47af	VR1	8d	Ltc
LTAEF	-	LT3010EMS8E-5	LVR-IC	LDO, Lo-Power, 5V±2%, 50mA, +CE	MSOP-8	55xb	-	8d	Ltc
LTAF	-	LT1460CCMS8-5	Vref-IC	µPower, Precision, Series, 5.0V±0.075%	MS8	47af	VR1	8d	Ltc
LTAG	-	LT1460FCMS8-5	Vref-IC	µPower, Precision, Series, 5.0V±0.075%	MS8	47af	VR1	8d	Ltc
LTAH	-	LT1460CCMS8-10	Vref-IC	µPower, Precision, Series, 10V±0.075%	MS8	47af	VR1	8d	Ltc
LTAJ	-	LT1460FCMS8-10	Vref-IC	µPower, Precision, Series, 10V±0.075%	MS8	47af	VR1	8d	Ltc
LTZF	-	LT3010EMS8E	LVR-IC	LDO, Lo-Power, Adjustable 1.275..60V±2%, 50mA, +CE	MSOP-8	55xc	-	8d	Ltc
LU	-	LR6155E6-UC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LU	-	LR6155E6-UD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LU	-	RP154N019B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
LU4	-	HD74LV2GU04AUS	CMOS-Log	Triple unbuffered inverters	SSOP-8	47	Log56	8c	Ren
LV	-	LR6155E6-VC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LV	-	LR6155E6-VD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LV	-	RP154N020B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
LW	-	LR6155E6-WC	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.3V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LW	-	LR6155E6-WD	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.3V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LW	-	RP154N021B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
LX	-	LR6155E6-XC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LX	-	LR6155E6-XD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LX	-	NL37WZ17US	CMOS-Log	Triple non-inverting Schmitt-trigger	SOP-8	47	Log71	8a	Ons
LX	-	RP154N022B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
LY	-	LR6155E6-YC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	TSOP-6	33rg	VR19	7c	Lrc
LY	-	LR6155E6-YD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	TSOP-6	33x5	VR19	7ca	Lrc
LY	-	RP154N023B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
LZ	-	RP154N024B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
M0	-	NL27WZ125US	CMOS-Log	Dual bus buffer with 3-state output	SOP-8	47	Log54	8a	Ons
M0	-	R1131D101B	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
M0	-	R1151N001C	LVR-IC	Boost, 1.0V±2%, 150mA, +CE, Vdet ODO	SOT-23-6	vre	-	7da	Ric
M020	-	R1190S020D	LVR-IC	2.0V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M021	-	R1190S021D	LVR-IC	2.1V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M022	-	R1190S022D	LVR-IC	2.2V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M023	-	R1190S023D	LVR-IC	2.4V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M024	-	R1190S024D	LVR-IC	2.5V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M025	-	R1190S025D	LVR-IC	2.6V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M026	-	R1190S026D	LVR-IC	2.7V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M027	-	R1190S027D	LVR-IC	2.8V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M028	-	R1190S028D	LVR-IC	2.9V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M029	-	R1190S029D	LVR-IC	2.0V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M030	-	R1190S030D	LVR-IC	3.1V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M031	-	R1190S031D	LVR-IC	3.2V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M032	-	R1190S032D	LVR-IC	3.3V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M033	-	R1190S033D	LVR-IC	3.4V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M034	-	R1190S034D	LVR-IC	3.5V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M035	-	R1190S035D	LVR-IC	3.6V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M036	-	R1190S036D	LVR-IC	3.7V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M037	-	R1190S037D	LVR-IC	3.8V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M038	-	R1190S038D	LVR-IC	3.9V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M039	-	R1190S039D	LVR-IC	3.0V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M040	-	R1190S040D	LVR-IC	4.1V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M041	-	R1190S041D	LVR-IC	4.2V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M042	-	R1190S042D	LVR-IC	4.3V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M043	-	R1190S043D	LVR-IC	4.4V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M044	-	R1190S044D	LVR-IC	4.5V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M045	-	R1190S045D	LVR-IC	4.6V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M046	-	R1190S046D	LVR-IC	4.7V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M047	-	R1190S047D	LVR-IC	4.8V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M048	-	R1190S048D	LVR-IC	4.9V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M049	-	R1190S049D	LVR-IC	4.0V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M050	-	R1190S050D	LVR-IC	5.1V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M051	-	R1190S051D	LVR-IC	5.2V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M052	-	R1190S052D	LVR-IC	5.3V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M054	-	R1190S054D	LVR-IC	5.4V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M055	-	R1190S055D	LVR-IC	5.5V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M056	-	R1190S056D	LVR-IC	5.6V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M057	-	R1190S057D	LVR-IC	5.7V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M058	-	R1190S058D	LVR-IC	5.8V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M059	-	R1190S059D	LVR-IC	5.9V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M060	-	R1190S060D	LVR-IC	6.0V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M061	-	R1190S061D	LVR-IC	6.1V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M062	-	R1190S062D	LVR-IC	6.2V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M063	-	R1190S063D	LVR-IC	6.3V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M064	-	R1190S064D	LVR-IC	6.4V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M065	-	R1190S065D	LVR-IC	6.5V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M066	-	R1190S066D	LVR-IC	6.6V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M067	-	R1190S067D	LVR-IC	6.7V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M068	-	R1190S068D	LVR-IC	6.8V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M069	-	R1190S069D	LVR-IC	6.9V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M070	-	R1190S070D	LVR-IC	7.0V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M071	-	R1190S071D	LVR-IC	7.1V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M072	-	R1190S072D	LVR-IC	7.2V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M073	-	R1190S073D	LVR-IC	7.3V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M074	-	R1190S074D	LVR-IC	7.4V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M075	-	R1190S075D	LVR-IC	7.5V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M076	-	R1190S076D	LVR-IC	7.6V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M077	-	R1190S077D	LVR-IC	7.7V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M078	-	R1190S078D	LVR-IC	7.8V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M079	-	R1190S079D	LVR-IC	7.9V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M080	-	R1190S080D	LVR-IC	8.0V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M081	-	R1190S081D	LVR-IC	8.1V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M082	-	R1190S082D	LVR-IC	8.2V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M083	-	R1190S083D	LVR-IC	8.3V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M084	-	R1190S084D	LVR-IC	8.4V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M085	-	R1190S085D	LVR-IC	8.5V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M086	-	R1190S086D	LVR-IC	8.6V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M087	-	R1190S087D	LVR-IC	8.7V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M088	-	R1190S088D	LVR-IC	8.8V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M089	-	R1190S089D	LVR-IC	8.9V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M090	-	R1190S090D	LVR-IC	9.0V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M091	-	R1190S091D	LVR-IC	9.1V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M092	-	R1190S092D	LVR-IC	9.2V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M093	-	R1190S093D	LVR-IC	9.3V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M094	-	R1190S094D	LVR-IC	9.4V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M095	-	R1190S095D	LVR-IC	9.5V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M096	-	R1190S096D	LVR-IC	9.6V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M097	-	R1190S097D	LVR-IC	9.7V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M098	-	R1190S098D	LVR-IC	9.8V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M099	-	R1190S099D	LVR-IC	9.9V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M1	-	NL27WZ126US	CMOS-Log	Dual bus buffer with 3-state output	SOP-8	47	Log55	8a	Ons
M1	-	R1131D111B	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
M1	-	R1151N002C	LVR-IC	Boost, 2.0V±2%, 150mA, +CE, Vdet ODO	SOT-23-6	vre	-	7da	Ric
M100	-	R1190S100D	LVR-IC	10.0V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M101	-	R1190S101D	LVR-IC	10.1V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M102	-	R1190S102D	LVR-IC	10.2V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M103	-	R1190S103D	LVR-IC	10.3V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M104	-	R1190S104D	LVR-IC	10.4V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M105	-	R1190S105D	LVR-IC	10.5V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M106	-	R1190S106D	LVR-IC	10.6V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M107	-	R1190S107D	LVR-IC	10.7V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M108	-	R1190S108D	LVR-IC	10.8V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M109	-	R1190S109D	LVR-IC	10.9V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M110	-	R1190S110D	LVR-IC	11.0V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M111	-	R1190S111D	LVR-IC	11.1V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M112	-	R1190S112D	LVR-IC	11.2V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M113	-	R1190S113D	LVR-IC	11.3V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M114	-	R1190S114D	LVR-IC	11.4V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M115	-	R1190S115D	LVR-IC	11.5V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M116	-	R1190S116D	LVR-IC	11.6V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M117	-	R1190S117D	LVR-IC	11.7V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M118	-	R1190S118D	LVR-IC	11.8V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M119	-	R1190S119D	LVR-IC	11.9V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M120	-	R1190S120D	LVR-IC	12.0V±1.5%, 1A, +CE, CL	HSOP-6J	zu	VR7	7h	Ric
M2	-	R1131D121B	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
M2	-	R1151N003C	LVR-IC	Boost, 3.0V±2%, 150mA, +CE, Vdet ODO	SOT-23-6	vre	-	7da	Ric
M2A	-	MA122	Si-diode	Quad, Fast, Sw, 80V, 100mA, Vf<1.2V(100mA), <10ns	SOT-23-6	33	D12	7b	Pan
M2C	-	MA124	Si-diode	Quad, Fast, Sw, 80V, 100mA, Vf<1.2V(100mA), <3ns	SOT-23-6	33bw	-	7b	Pan
M2D	-	MA121	Si-diode	Triple, Fast, Sw, 80V, 100mA, Vf<1.2V(100mA), <3ns	SOT-23-6	33bb	-	7b	Pan
M2D	-	MA6X121	Si-diode	Triple, Sw, 80V, 100mA, Vf<1.2V(100mA), <3ns	SOT-23-6	33bb	-	7b	Pan
M2K	-	MA351	C-diode	Triple, FM-AFC, 15V, 10/16pF(10V)	SOT-23-6	33bb	-	7b	Pan
M2L	-	MA6X078	Si-diode	Triple, Band-sw, 35V, 100mA, Vf=0.92V(100mA), 0.9pF	SOT-23-6	33bb	-	7b	Pan
M2L	-	MA78	Si-diode	Triple, Band-sw, 35V, 100mA, Vf=0.92V(100mA), 0.9pF	SOT-23-6	33bb	-	7b	Pan
M2T	-	MA556	PIN-diode	Triple, UHF/SHF-AGC, 40V, 100mA, Vf=1.05V(100mA), 0.3pF	SOT-23-6	33bb	-	7b	Pan
M2T	-	MA6X556	PIN-diode	Triple, UHF/SHF-AGC, 40V, 100mA, Vf=1.05V(100mA), 0.3pF	SOT-23-6	33bb	-	7b	Pan
M3	-	R1131D131B	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
M3	-	R1151N004C	LVR-IC	Boost, 4.0V±2%, 150mA, +CE, Vdet ODO	SOT-23-6	vre	-	7da	Ric
M4	-	MBD110DW	Si-diode	Dual, Schottky, UHF/VHF-Det, 7V, 120mW, <1pF	SOT-363	33de	-	7b	Ons
M4	-	R1131D141B	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
M4	-	R1151N005C	LVR-IC	Boost, 5.0V±2%, 150mA, +CE, Vdet ODO	SOT-23-6	vre	-	7da	Ric
M4206N	-	ZDM4206N	n-MOSFET	V-MOS, Dual, 60V, 1A, 2.25w, 8.12ns, <1Ω(1.5A)	SOP-8	47fo	-	8d	Zx
M4306N	-	ZDM4306N	n-MOSFET	V-MOS, Dual, 60V, 2A, 2.5W, 8/30ns, <0.33Ω(3A)	SOP-8	47fo	-	8d	Zx
M5	-	NL27WZ04DF	CMOS-Log	Dual inverters	SC-70-6	33	Log24	7d	Ons
M5	-	NL27WZ04DT	CMOS-Log	Dual inverters	SOT-23-6	33	Log24	7m	Ons
M5	-	R1131D151B	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
M5	-	R1151N006C	LVR-IC	Boost, 6.0V±2%, 150mA, +CE, Vdet ODO	SOT-23-6	vre	-	7da	Ric
M6	-	NL27WZU04DF	CMOS-Log	Dual unbuffered inverters	SOT-363	33	Log24	7m	Ons
M6	-	NL27WZU04DT	CMOS-Log	Dual unbuffered inverters	TSOP-6	33	Log24	8a	Ons
M6	-	R1131D161B	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
M6	-	R1151N007C	LVR-IC	Boost, 7.0V±2%, 150mA, +CE, Vdet ODO	SOT-23-6	vre	-	7da	Ric
M7	-	NL27WZ07DF	CMOS-Log	Dual noninverting buffers/drivers (ODO)	SC-70-6	33	Log26	7m	Ons
M7	-	NL27WZ07DT	CMOS-Log	Dual noninverting buffers/drivers (ODO)	SOT-23-6	33	Log26	7m	Ons
M7	-	R1131D171B	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
M7	-	R1151N008C	LVR-IC	Boost, 8.0V±2%, 150mA, +CE, Vdet ODO	SOT-23-6	vre	-	7da	Ric
M7A	-	MA6XD16	Si-diode	Quad, SBD, Sw, 30V, 30mA, Vf<1V(30mA), <1ns	SOT-23-6	33	Di4	7b	Pan
M8	-	R1131D181B	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
M8	-	R1151N009C	LVR-IC	Boost, 9.0V±2%, 150mA, +CE, Vdet ODO	SOT-23-6	vre	-	7da	Ric
M9	-	R1131D191B	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
M9	-	R1151N010C	LVR-IC	Boost, 10V±2%, 150mA, +CE, Vdet ODO	SOT-23-6	vre	-	7da	Ric
MA	-	μPA672T	n-MOSFET	V-MOS, 50V, 100mA, <20Ω(10mA)	SC-95	33fc	-	7b	Nec
MA	-	KRA721F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=4.7k/4.7k	TFS6	35	TD7	7b	Kec
MA	-	MBT3904DW	Si-npn	Dual, GP, 60V, 200mA, 150mW, B= 100..300, >300MHz	SOT-363	33	T8	7b	Ons
MA	-	NL27WZ14DF	CMOS-Log	Dual Schmitt-trigger inverter buffers	SC-70-6	33	Log34	7m	Ons
MA	-	NL27WZ14DT	CMOS-Log	Dual Schmitt-trigger inverter buffers	SOT-23-6	33	Log34	7m	Ons
MA	-	NL37WZ14US	CMOS-Log	Triple Schmitt-trigger inverters	SOP-8	47	Log57	8a	Ons
MA	-	R1151N001B	LVR-IC	Boost, 1.0V±2%, 150mA, +CE, Vdet ODO	SOT-23-6	vre	-	7da	Ric
MA	-	RP154N025B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
MAB	-	NCP2890DMR2	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Ons
MAB•	-	NCP2890DMR2G	Lin-IC	AF PA, 2.2..5.5V, 2x131mW(5V/16Ω), shutdown	SSOP-8	47	AFP12	8d	Ons
MAC	-	NCP2809BDMR2	Lin-IC	AF PA, 2.2..5.5V, 2x131mW(5V/16Ω), shutdown	SSOP-10	60	AFP41	8d	Ons
MAC	ia	NCP2809BDMR2G	Lin-IC	AF PA, 2.2..5.5V, 2x131mW(5V/16Ω), shutdown	SSOP-10	60	AFP41	8d	Ons
MAE	-	NCP2809ADMR2	Lin-IC	AF PA, 2.2..5.5V, 2x131mW(5V/16Ω), shutdown	SSOP-10	60	AFP41	8d	Ons
MAE	ia	NCP2809ADMR2G	Lin-IC	AF PA, 2.2..5.5V, 2x131mW(5V/16Ω), shutdown	SSOP-10	60	AFP41	8d	Ons
MAK	-	NCP4894DMR2	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	SSOP-10	60	AFP19	8d	Ons
MAK	-	NCP4894DMR2G	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	SSOP-10	60	AFP19	8d	Ons
MB	-	KRA722F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=10k/10k	TFS6	35	TD7	7b	Kec
MB	-	RP154N026B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
MC	-	KRA723F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=22k/22k	TFS6	35	TD7	7b	Kec
MC	-	RP154N027B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
MD	-	KRA724F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=47k/47k	TFS6	35	TD7	7b	Kec
MD	-	RP154N028B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
ME	-	RP154N029B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
MF	-	NL27WZ06DF	CMOS-Log	Dual inverter buffers/drivers (ODO)	SC-70-6	33	Log25	7m	Ons
MF	-	NL27WZ06DT	CMOS-Log	Dual inverter buffers/drivers (ODO)	SOT-23-6	33	Log25	7m	Ons
MF	-	RP154N030B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
MG	-	KRA727F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=10k/47k	TFS6	35	TD7	7b	Kec
MG	-	RP154N031B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.85V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
MH	-	KRA728F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=22k/47k	TFS6	35	TD7	7b	Kec
MH	-	RP154N032B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MI	-	NX3L1T3157GW	CMOS-Log	Single-pole double-throw analog switch	SOT-363	33	Log38	7b	Nxp
MJ	-	KRA729F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=47k/22k	TFS6	35	TD7	7b	Kec
MJ	-	NX3L1G3157GW	CMOS-Log	Single-pole double-throw analog switch	SOT-363	33	Log38	7b	Nxp
MJ	-	RP154N033B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
MK	-	KRA730F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=4.7k	TFS6	35	TD7	7b	Kec
MK	-	RP154N034B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
ML	-	KRA731F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=10k	TFS6	35	TD7	7b	Kec
ML	-	RP154N035B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
MM	-	RP154N036B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.8V±1%, 300mA, +CE	SOT-23-6	x5	VR19	7da	Ric
MN	-	KRA733F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=22k	TFS6	35	TD7	7b	Kec
MP	-	KRA734F	Si-pnp-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=47k	TFS6	35	TD7	7b	Kec
MQB	-	KRC881T	Si-npn-Digi	Dual, Sw, 20V, 300mA, 900mW, R1=2.2k	TS6	33	TD3	7k	Kec
MR	-	NL27WZ16DF	CMOS-Log	Dual non-inverter buffers	SC-70-6	33	Log23	7d	Ons
MR	-	NL27WZ16DT	CMOS-Log	Dual non-inverter buffers	SOT-23-6	33	Log23	7m	Ons
MRB	-	KRC882T	Si-npn-Digi	Dual, Sw, 20V, 300mA, 900mW, R1=4.7k	TS6	33	TD3	7k	Kec
MSB	-	KRC883T	Si-npn-Digi	Dual, Sw, 20V, 300mA, 900mW, R1=5.6k	TS6	33	TD3	7k	Kec
MTB	-	KRC884T	Si-npn-Digi	Dual, Sw, 20V, 300mA, 900mW, R1=6.8k	TS6	33	TD3	7k	Kec
MUB	-	KRC885T	Si-npn-Digi	Dual, Sw, 20V, 300mA, 900mW, R1=10k	TS6	33	TD3	7k	Kec
MVB	-	KRC886T	Si-npn-Digi	Dual, Sw, 20V, 300mA, 900mW, R1=22k	TS6	33	TD3	7k	Kec
N	-	HSMS-280N	Si-diode	Quad, Schottky, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-363	33	D14	7b	Agi
N0	-	R1131D201B	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
N0	-	R5323N001B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
N06	-	DDC123JH	Si-npn-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=2.2k/47k	SOT-563	35	TD3	7k	Di
N06	-	DDC123JK	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2k2/47k	SC-74R	33	TD3	7k	Di
N06	-	DDC123JU	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2k2/47k	SOT-363	33	TD3	7k	Di
N07	-	DDC143TH	Si-npn-Digi	Dual, Sw, 50V, 100mA, 150mW, 250MHz, R1=4.7k	SOT-563	35	TD3	7k	Di
N07	-	DDC143TK	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4k7	SC-74R	33	TD3	7k	Di
N07	-	DDC143TU	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4k7	SOT-363	33	TD3	7k	Di
N08	-	DDC143EH	Si-npn-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=4.7k/4.7k	SOT-563	35	TD3	7k	Di
N1	-	BAS70-07VV	Si-diode	Triple, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-666	35dd	-	7b	Nxp
N1	-	R1131D211B	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
N1	-	R5323N002B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
N12	-	DDC114TH	Si-npn-Digi	Dual, Sw, 50V, 100mA, 150mW, R1=10k	SOT-563	35	TD3	7k	Di
N12	-	DDC114TK	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R=10k	SC-74R	33	TD3	7k	Di
N12	-	DDC114TU	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	SOT-363	33	TD3	7k	Di
N13	-	DDC114EH	Si-npn-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=10k/10k	SOT-563	35	TD3	7k	Di
N13	-	DDC114EK	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SC-74R	33	TD3	7k	Di
N13	-	DDC114EU	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SOT-363	33	TD3	7k	Di
N14	-	DDC114YH	Si-npn-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=10/47k	SOT-563	35	TD3	7k	Di
N14	-	DDC114YK	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	SC-74R	33	TD3	7k	Di
N14	-	DDC114YU	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	SOT-363	33	TD3	7k	Di
N15D	-	ZXT13N15DE6TA	Si-npn	Lo-sat, Sw, 40V, 5A, 1.1W, B=250..900, 72MHz	SOT-23-6	33t4	-	7b	Zx
N17	-	DDC124EH	Si-npn-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=22k/22k	SOT-563	35	TD3	7k	Di
N17	-	DDC124EK	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SC-74R	33	TD3	7l	Di
N17	-	DDC124EU	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SOT-363	33	TD3	7l	Di
N2	-	1PS66SB17	Si-diode	Triple, Schottky, Sw, 4V, 30mA, Vf<0.6V(10mA), <0.65pF	SOT-666	35dd	-	7b	Phi
N2	-	BC807DS	Si-pnp	Dual, GP, 50V, 500mA, 370mW, B=160..400, 80MHz	SOT-457	33	T10	7b	Phi
N2	-	KRC866E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=1k/10k	TES6	35	TD3	7k	Kec
N2	-	KRC866U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=1k/10k	US6	33	TD8	7k	Kec
N2	-	R1131D221B	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
N2	-	R5323N003B	LVR-IC	LDO, Dual out, Vout1/Vout2=3V/3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
N20	-	DDC144EH	Si-npn-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=47k/47k	SOT-563	35	TD3	7k	Di
N20	-	DDC144EK	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SC-74R	33	TD3	7k	Di
N20	-	DDC144EU	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SOT-363	33	TD3	7k	Di
N20D	-	ZXT13N20DE6	Si-npn	Lo-sat, Sw, 50V, 4.5A, 96MHz	SOT-363	33t4	-	7b	Zx
N2211	-	NCS2211D	Lin-IC	AF PA, BTL 2.7..5.5V, 1.5W(5V/4Ω), shutdown	SOP-8	47	AFP11	8d	Ons
N3	-	1PS66SB62	Si-diode	Triple, Schottky, Sw, 40V, 20mA, Vf<0.8V(2mA), <0.6pF	SOT-666	35dd	-	7b	Phi
N3	-	BC817DS	Si-npn	Dual, GP, 50V, 500mA, 370mW, B=160..400, 100MHz	SOT-457	33	T8	7b	Phi
N3	-	R1131D231B	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
N3	-	R5323N004B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
N4	-	1PS66SB63	Si-diode	Triple, Schottky, Sw, 5V, 20mA, Vf<0.3V(1mA), <0.5pF	SOT-666	35dd	-	7b	Phi
N4	-	BC817DPN	Si-n/p	Dual, GP, 50V, 500mA, 370mW, B=160..400, 100MHz	SOT-457	33	T9	7b	Phi
N4	-	KRC867E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	TES6	35	TD3	7k	Kec
N4	-	KRC867U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	US6	33	TD8	7k	Kec
N4	-	R1131D241B	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
N4	-	R5323N005B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
N4A	-	S-1131B15PD-N4A-TF	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4B	-	S-1131B16PD-N4B-TF	LVR-IC	LDO, 1.6V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4C	-	S-1131B17PD-N4C-TF	LVR-IC	LDO, 1.7V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4D	-	S-1131B18PD-N4D-TF	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N4E	-	S-1131B19PD-N4E-TF	LVR-IC	LDO, 1.9V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4F	-	S-1131B20PD-N4F-TF	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4G	-	S-1131B21PD-N4G-TF	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4H	-	S-1131B22PD-N4H-TF	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4I	-	S-1131B23PD-N4I-TF	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4J	-	S-1131B24PD-N4J-TF	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4K	-	S-1131B25PD-N4K-TF	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4L	-	S-1131B26PD-N4L-TF	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4M	-	S-1131B27PD-N4M-TF	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4N	-	S-1131B28PD-N4N-TF	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4O	-	S-1131B29PD-N4O-TF	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4P	-	S-1131B30PD-N4P-TF	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4Q	-	S-1131B31PD-N4Q-TF	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4R	-	S-1131B32PD-N4R-TF	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4S	-	S-1131B33PD-N4S-TF	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4T	-	S-1131B34PD-N4T-TF	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4U	-	S-1131B35PD-N4U-TF	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4V	-	S-1131B36PD-N4V-TF	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4W	-	S-1131B37PD-N4W-TF	LVR-IC	LDO, 3.7V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4X	-	S-1131B38PD-N4X-TF	LVR-IC	LDO, 3.8V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4Y	-	S-1131B39PD-N4Y-TF	LVR-IC	LDO, 3.9V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N4Z	-	S-1131B40PD-N4Z-TF	LVR-IC	LDO, 4.0V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N5	-	1PS66SB82	Si-diode	Triple, Schottky, Sw, 15V, 30mA, Vf<0.7V(30mA), <1pF	SOT-666	35dd	-	7b	Phi
N5	-	KRC868E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	TES6	35	TD3	7k	Kec
N5	-	KRC868U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	US6	33	TD8	7k	Kec
N5	-	R1131D251B	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
N5	-	R5323N006B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
N50D	-	ZXT13N50DE6	Si-npn	Lo-sat, Sw, 100V, 4A, 115MHz	SOT-363	33t4	-	7b	Zx
N5A	-	S-1131B41PD-N5A-TF	LVR-IC	LDO, 4.1V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N5B	-	S-1131B42PD-N5B-TF	LVR-IC	LDO, 4.2V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N5C	-	S-1131B43PD-N5C-TF	LVR-IC	LDO, 4.3V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N5D	-	S-1131B44PD-N5D-TF	LVR-IC	LDO, 4.4V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N5E	-	LN6214P15M	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N5E	-	LN6214P15M	LVR-IC	LDO, 1.5V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N5E	-	S-1131B45PD-N5E-TF	LVR-IC	LDO, 4.5V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N5F	-	LN6214P16M	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N5F	-	LN6214P16M	LVR-IC	LDO, 1.6V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N5F	-	S-1131B46PD-N5F-TF	LVR-IC	LDO, 4.6V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N5G	-	S-1131B47PD-N5G-TF	LVR-IC	LDO, 4.7V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N5H	-	LN6214P17M	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N5H	-	LN6214P17M	LVR-IC	LDO, 1.7V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N5H	-	S-1131B48PD-N5H-TF	LVR-IC	LDO, 4.8V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N5I	-	S-1131B49PD-N5I-TF	LVR-IC	LDO, 4.9V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N5J	-	S-1131B50PD-N5J-TF	LVR-IC	LDO, 5.0V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N5K	-	LN6214P18M	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N5K	-	LN6214P18M	LVR-IC	LDO, 1.8V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N5K	-	S-1131B51PD-N5K-TF	LVR-IC	LDO, 5.1V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N5L	-	LN6214P19M	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N5L	-	LN6214P19M	LVR-IC	LDO, 1.9V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N5L	-	S-1131B52PD-N5L-TF	LVR-IC	LDO, 5.2V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N5M	-	LN6214P20M	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N5M	-	LN6214P20M	LVR-IC	LDO, 2.0V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N5M	-	S-1131B53PD-N5M-TF	LVR-IC	LDO, 5.3V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N5N	-	LN6214P21M	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N5N	-	LN6214P21M	LVR-IC	LDO, 2.1V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N5N	-	S-1131B54PD-N5N-TF	LVR-IC	LDO, 5.4V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N5O	-	S-1131B55PD-N5O-TF	LVR-IC	LDO, 5.5V±1%, 300mA, +CE	HSON-6	34va	VR4	7b	Sii
N5P	-	LN6214P22M	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N5P	-	LN6214P22M	LVR-IC	LDO, 2.2V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N5R	-	LN6214P23M	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N5R	-	LN6214P23M	LVR-IC	LDO, 2.3V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N5S	-	LN6214P24M	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N5S	-	LN6214P24M	LVR-IC	LDO, 2.4V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N5T	-	LN6214P25M	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N5T	-	LN6214P25M	LVR-IC	LDO, 2.5V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N5U	-	LN6214P26M	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N5U	-	LN6214P26M	LVR-IC	LDO, 2.6V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N5V	-	LN6214P27M	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N5V	-	LN6214P27M	LVR-IC	LDO, 2.7V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N5X	-	LN6214P28M	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N5X	-	LN6214P28M	LVR-IC	LDO, 2.8V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N5Y	-	LN6214P29M	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N5Y	-	LN6214P29M	LVR-IC	LDO, 2.9V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N5Z	-	LN6214P30M	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N5Z	-	LN6214P30M	LVR-IC	LDO, 3.0V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6	-	KRC869E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	TES6	35	TD3	7k	Kec
N6	-	KRC869U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	US6	33	TD8	7k	Kec
N6	-	R1131D261B	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
N6	-	R5323N007B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
N60	-	LN6214P31M	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N60	-	LN6214P31M	LVR-IC	LDO, 3.1V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N61	-	LN6214P32M	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N61	-	LN6214P32M	LVR-IC	LDO, 3.2V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N62	-	LN6214P33M	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N62	-	LN6214P33M	LVR-IC	LDO, 3.3V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N63	-	LN6214P34M	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N63	-	LN6214P34M	LVR-IC	LDO, 3.4V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N64	-	LN6214P35M	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N64	-	LN6214P35M	LVR-IC	LDO, 3.5V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N65	-	LN6214P36M	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N65	-	LN6214P36M	LVR-IC	LDO, 3.6V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N66	-	LN6214P37M	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N66	-	LN6214P37M	LVR-IC	LDO, 3.7V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N67	-	LN6214P38M	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N67	-	LN6214P38M	LVR-IC	LDO, 3.8V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N68	-	LN6214P39M	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N68	-	LN6214P39M	LVR-IC	LDO, 3.9V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N69	-	LN6214P40M	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N69	-	LN6214P40M	LVR-IC	LDO, 4.0V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6A	-	LN6214P41M	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6A	-	LN6214P41M	LVR-IC	LDO, 4.1V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6B	-	LN6214P42M	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6B	-	LN6214P42M	LVR-IC	LDO, 4.2V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6C	-	LN6214P43M	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6C	-	LN6214P43M	LVR-IC	LDO, 4.3V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6D	-	LN6214P44M	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6D	-	LN6214P44M	LVR-IC	LDO, 4.4V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6E	-	LN6214P45M	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6E	-	LN6214P45M	LVR-IC	LDO, 4.5V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6F	-	LN6214P46M	LVR-IC	LDO, 4.6V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6F	-	LN6214P46M	LVR-IC	LDO, 4.6V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6H	-	LN6214P47M	LVR-IC	LDO, 4.7V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6H	-	LN6214P47M	LVR-IC	LDO, 4.7V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6K	-	LN6214P48M	LVR-IC	LDO, 4.8V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6K	-	LN6214P48M	LVR-IC	LDO, 4.8V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6L	-	LN6214P49M	LVR-IC	LDO, 4.9V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6L	-	LN6214P49M	LVR-IC	LDO, 4.9V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6M	-	LN6214P50M	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6M	-	LN6214P50M	LVR-IC	LDO, 5.0V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6N	-	LN6214P51M	LVR-IC	LDO, 5.1V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6N	-	LN6214P51M	LVR-IC	LDO, 5.1V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6P	-	LN6214P52M	LVR-IC	LDO, 5.2V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6P	-	LN6214P52M	LVR-IC	LDO, 5.2V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6R	-	LN6214P53M	LVR-IC	LDO, 5.3V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6R	-	LN6214P53M	LVR-IC	LDO, 5.3V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6S	-	LN6214P54M	LVR-IC	LDO, 5.4V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6S	-	LN6214P54M	LVR-IC	LDO, 5.4V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6T	-	LN6214P55M	LVR-IC	LDO, 5.5V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6T	-	LN6214P55M	LVR-IC	LDO, 5.5V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6U	-	LN6214P56M	LVR-IC	LDO, 5.6V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6U	-	LN6214P56M	LVR-IC	LDO, 5.6V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6V	-	LN6214P57M	LVR-IC	LDO, 5.7V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6V	-	LN6214P57M	LVR-IC	LDO, 5.7V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6X	-	LN6214P58M	LVR-IC	LDO, 5.8V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6X	-	LN6214P58M	LVR-IC	LDO, 5.8V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6Y	-	LN6214P59M	LVR-IC	LDO, 5.9V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6Y	-	LN6214P59M	LVR-IC	LDO, 5.9V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N6Z	-	LN6214P60M	LVR-IC	LDO, 6.0V±2%, 500mA	SOT-26	33yt	VR1	7r	Inw
N6Z	-	LN6214P60M	LVR-IC	LDO, 6.0V±2%, 500mA	SOT-26	33yt	VR1	7d	Nln
N7	-	KRC870E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/4.7k	TES6	35	TD3	7k	Kec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N7	-	KRC870U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/4.7k	US6	33	TD8	7k	Kec
N7	-	R1131D271B	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
N7	-	R5323N008B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/4V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
N8	-	KRC871E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	TES6	35	TD3	7k	Kec
N8	-	KRC871U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	US6	33	TD8	7k	Kec
N8	-	R1131D281B	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
N8	-	R5323N009B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
N81	-	DDC122LH	Si-npn-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=0.22k/10k	SOT-563	35	TD3	7k	Di
N82	-	DDC142JH	Si-npn-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=0.47k/10k	SOT-563	35	TD3	7k	Di
N83	-	DDC122TH	Si-npn-Digi	Dual, Sw, 50V, 100mA, 150mW, R1=0.22k	SOT-563	35	TD3	7k	Di
N84	-	DDC142TH	Si-npn-Digi	Dual, Sw, 50V, 100mA, 150mW, R1=0.47k	SOT-563	35	TD3	7k	Di
N9	-	KRC872E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	TES6	35	TD3	7k	Kec
N9	-	KRC872U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	US6	33	TD8	7k	Kec
N9	-	R1131D291B	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
N9	-	R5323N002A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
NA	-	EUP7201-1.8/2.8V	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Eut
NA	-	KRC821F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=4.7k/4.7k	TFS6	35	TD8	7b	Kec
NA	-	KRC841T	Si-npn-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=1k/1k	TS6	33	TD3	7k	Kec
NA	-	KRC851E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	TES6	35	TD3	7k	Kec
NA	-	KRC851U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	US6	33	TD8	7k	Kec
NA	-	R5323N003A	LVR-IC	LDO, Dual out, Vout1/Vout2=3V/3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
NB	-	KRC822F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=10k/10k	TFS6	35	TD8	7b	Kec
NB	-	KRC842T	Si-npn-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=2.2k/2.2k	TS6	33	TD3	7k	Kec
NB	-	KRC852E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	TES6	35	TD3	7k	Kec
NB	-	KRC852U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	US6	33	TD8	7k	Kec
NB	-	R5323N010B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
NC	-	EUP7201-1.5/2.8V	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Eut
NC	-	KRC823F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=22k/22k	TFS6	35	TD8	7b	Kec
NC	-	KRC843T	Si-npn-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=4.7k/4.7k	TS6	33	TD3	7k	Kec
NC	-	KRC853E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	TES6	35	TD3	7k	Kec
NC	-	KRC853U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	US6	33	TD8	7k	Kec
NC	-	R5323N013A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
ND	-	EUP7201-2.5/2.8V	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Eut
ND	-	KRC824F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=47k/47k	TFS6	35	TD8	7b	Kec
ND	-	KRC844T	Si-npn-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=10k/10k	TS6	33	TD3	7k	Kec
ND	-	KRC854E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	TES6	35	TD3	7k	Kec
ND	-	KRC854U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	US6	33	TD8	7k	Kec
ND	-	R5323N014B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
NE	-	KRC845T	Si-npn-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=1k/10k	TS6	33	TD3	7k	Kec
NE	-	KRC855E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	TES6	35	TD3	7k	Kec
NE	-	KRC855U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	US6	33	TD8	7k	Kec
NE	-	R5323N015B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
NF	-	KRC846T	Si-npn-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=2.2k/10k	TS6	33	TD3	7k	Kec
NF	-	KRC856E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	TES6	35	TD3	7k	Kec
NF	-	KRC856U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	US6	33	TD8	7k	Kec
NF	-	R5323N016B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
NG	-	KRC827F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=10k/47k	TFS6	35	TD8	7b	Kec
NG	-	R5323N017B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
NH	-	EUP7201-1.8/3.3V	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Eut
NH	-	KRC828F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=22k/47k	TFS6	35	TD8	7b	Kec
NH	-	KRC857E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	TES6	35	TD3	7k	Kec
NH	-	KRC857U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	US6	33	TD8	7k	Kec
NH	-	R5323N018B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
NI	-	KRC858E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	TES6	35	TD3	7k	Kec
NI	-	KRC858U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	US6	33	TD8	7k	Kec
NJ	-	EUP7201-3.3/3.3V	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Eut
NJ	-	KRC829F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1/R2=47k/22k	TFS6	35	TD8	7b	Kec
NJ	-	KRC859E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	TES6	35	TD3	7k	Kec
NJ	-	KRC859U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	US6	33	TD8	7k	Kec
NJ	-	R5323N019A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
NK	-	EUP7201-2.8/3.0V	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Eut
NK	-	KRC830F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=4.7k	TFS6	35	TD8	7b	Kec
NK	-	KRC860E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4.7k	TES6	35	TD3	7k	Kec
NK	-	KRC860U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4.7k	US6	33	TD8	7k	Kec
NK	-	R5323N019B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
NL	-	EUP7201-2.8/3.3V	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Eut
NL	-	KRC831F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=10k	TFS6	35	TD8	7b	Kec
NL	-	R5323N020A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
NM	-	EUP7201-2.8/2.8V	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Eut
NM	-	KRC861E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	TES6	35	TD3	7k	Kec

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NM	-	KRC861U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	US6	33	TD8	7k	Kec
NM	-	R5323N020B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
NN	-	EUP7201-3.0/3.0V	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Eut
NN	-	HSMS-282N	Si-diode	Quad, Schottky, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-363	33	D14	7b	Agi
NN	-	KRC833F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=22k	TFS6	35	TD8	7b	Kec
NN	-	KRC862E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=100k	TES6	35	TD3	7k	Kec
NN	-	KRC862U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=100k	US6	33	TD8	7k	Kec
NN	-	R5323N021B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
NO	-	KRC863E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=22k	TES6	35	TD3	7k	Kec
NO	-	KRC863U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=22k	US6	33	TD8	7k	Kec
NP	-	EUP7201-2.8/1.2V	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Eut
NP	-	KRC834F	Si-npn-Digi	Dual, Sw, 20V, 50mA, 50mW, R1=47k	TFS6	35	TD8	7b	Kec
NP	-	KRC864E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=47k	TES6	35	TD3	7k	Kec
NP	-	KRC864U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=47k	US6	33	TD8	7k	Kec
NP	-	R5323N022B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
NP34	-	NC7NP34K8	CMOS-Log	Triple non-inverter buffers	US8	47	Log69	8d	F
NQ	-	R5323N023A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
NR	-	R5323N023B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
NS	-	R5323N024A	LVR-IC	LDO, Dual out, Vout1/Vout2=3V/3.1V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
NT	-	EUP7201-3.0/3.3V	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Eut
NT	-	R5323N013B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
NU	-	EUP7201-1.8/2.6V	LVR-IC	LDO, Dual out, Vout1/Vout2=1/8V/2.6V±2%, 150mA, +CE	SOT-23-6	33x5	VR19	7b	Eut
NU	-	R5323N027B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
NV	-	R5323N029B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
NW	-	R5323N012B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
NX	-	R5323N026B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
NY	-	R5323N030A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
NZ	-	R5323N030B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
O	-	HSMS-280R	Si-diode	Quad, Schottky, RF, 70V, 1A, Vf<0.41V(1mA), <2pF, 35Ω(5mA)	SOT-363	33by	-	7b	Agi
OA	-	μPA608T	Si-n/p	Dual, GP, pnp: 25V, 100mA; npn: 60V, 100mA	SOT-23-6	33	T9	7b	Nec
OA	-	Si1403DL	p-MOSFET	V-MOS, LogL, 20V, ±1.4A, <0.265Ω	SOT-363	33fc	-	7b	Six
OB	-	Si1405DL	p-MOSFET	V-MOS, LogL, 8V, ±1.6A, <0.21Ω	SOT-363	33fc	-	7b	Six
OB2	-	S-8337AAAC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V)	SON-8	44ug	-	8o	Sii
OBA	-	S-8337AAAA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V)	SON-8	44ug	-	8o	Sii
OBB	-	S-8337AAAB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V)	SON-8	44ug	-	8o	Sii
OBC	-	S-8337AABA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V)	SON-8	44ug	-	8o	Sii
OBD	-	S-8337AABB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V)	SON-8	44ug	-	8o	Sii
OBE	-	S-8337AABC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V)	SON-8	44ug	-	8o	Sii
OBEI	-	OPA653IDRB	Op-IC	Wide-band, Fixed gain, JFET, ±6.5V, 2V/V, 500MHz	VSON-8	44opg	OP3	8d	Ti
OBF	-	S-8337AACA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V)	SON-8	44ug	-	8o	Sii
OBG	-	S-8337AACB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V)	SON-8	44ug	-	8o	Sii
OBH	-	S-8337AACC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V)	SON-8	44ug	-	8o	Sii
OBI	-	S-8337AADA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V)	SON-8	44ug	-	8o	Sii
OBJ	-	S-8337AADB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V)	SON-8	44ug	-	8o	Sii
OBK	-	S-8337AADC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V)	SON-8	44ug	-	8o	Sii
OBL	-	S-8337AAEA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V)	SON-8	44ug	-	8o	Sii
OBM	-	S-8337AAEB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V)	SON-8	44ug	-	8o	Sii
OBN	-	S-8337AAEC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V)	SON-8	44ug	-	8o	Sii
OBO	-	S-8337AAFA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V)	SON-8	44ug	-	8o	Sii
OBP	-	S-8337AAFB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V)	SON-8	44ug	-	8o	Sii
OBQ	-	S-8337AAFC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V)	SON-8	44ug	-	8o	Sii
OBR	-	S-8337AAGA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V)	SON-8	44ug	-	8o	Sii
OBS	-	S-8337AAGB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V)	SON-8	44ug	-	8o	Sii
OBT	-	S-8337AAGC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V)	SON-8	44ug	-	8o	Sii
OBU	-	S-8337AAHA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V)	SON-8	44ug	-	8o	Sii
OBV	-	S-8337AAHB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V)	SON-8	44ug	-	8o	Sii
OBW	-	S-8337AAHC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V)	SON-8	44ug	-	8o	Sii
OBX	-	S-8337AAIA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V)	SON-8	44ug	-	8o	Sii
OBY	-	S-8337AAIB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V)	SON-8	44ug	-	8o	Sii
OBZ	-	S-8337AAIC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V)	SON-8	44ug	-	8o	Sii
OC	-	Si1407DL	p-MOSFET	V-MOS, LogL, 12V, ±1.6A, <0.225Ω	SOT-363	33fc	-	7b	Six
OC2	-	S-8338AAAC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCA	-	S-8338AAAA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCB	-	S-8338AAAB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCC	-	S-8338AABA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCD	-	S-8338AABB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCE	-	S-8338AABC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCF	-	S-8338AACA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCG	-	S-8338AACB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCH	-	S-8338AACC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V), -Shutdwon	SON-8	44ue	-	8o	Sii





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
OCI	-	S-8338AADA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCJ	-	S-8338AADB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCK	-	S-8338AADC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCL	-	S-8338AAEA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCM	-	S-8338AAEB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCN	-	S-8338AAEC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCO	-	S-8338AAFA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCP	-	S-8338AAFB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCQ	-	S-8338AAFC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCR	-	S-8338AAGA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCS	-	S-8338AAGB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCT	-	S-8338AAGC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCU	-	S-8338AAHA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCV	-	S-8338AAHB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCW	-	S-8338AAHC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCX	-	S-8338AAIA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCY	-	S-8338AAIB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V), -Shutdwon	SON-8	44ue	-	8o	Sii
OCZ	-	S-8338AAIC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V), -Shutdwon	SON-8	44ue	-	8o	Sii
OD2	-	S-8337ABAC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V)	SON-8	44ug	-	8o	Sii
ODA	-	S-8337ABAA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V)	SON-8	44ug	-	8o	Sii
ODB	-	S-8337ABAB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V)	SON-8	44ug	-	8o	Sii
ODC	-	S-8337ABBA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V)	SON-8	44ug	-	8o	Sii
ODD	-	S-8337ABBB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V)	SON-8	44ug	-	8o	Sii
ODE	-	S-8337ABBC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V)	SON-8	44ug	-	8o	Sii
ODF	-	S-8337ABCA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V)	SON-8	44ug	-	8o	Sii
ODG	-	S-8337ABCB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V)	SON-8	44ug	-	8o	Sii
ODH	-	S-8337ABCC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V)	SON-8	44ug	-	8o	Sii
ODI	-	S-8337ABDA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V)	SON-8	44ug	-	8o	Sii
ODJ	-	S-8337ABDB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V)	SON-8	44ug	-	8o	Sii
ODK	-	S-8337ABDC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V)	SON-8	44ug	-	8o	Sii
ODL	-	S-8337ABEA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V)	SON-8	44ug	-	8o	Sii
ODM	-	S-8337ABEB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V)	SON-8	44ug	-	8o	Sii
ODN	-	S-8337ABEC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V)	SON-8	44ug	-	8o	Sii
ODO	-	S-8337ABFA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V)	SON-8	44ug	-	8o	Sii
ODP	-	S-8337ABFB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V)	SON-8	44ug	-	8o	Sii
ODQ	-	S-8337ABFC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V)	SON-8	44ug	-	8o	Sii
ODR	-	S-8337ABGA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V)	SON-8	44ug	-	8o	Sii
ODS	-	S-8337ABGB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V)	SON-8	44ug	-	8o	Sii
ODT	-	S-8337ABGC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V)	SON-8	44ug	-	8o	Sii
ODU	-	S-8337ABHA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V)	SON-8	44ug	-	8o	Sii
ODV	-	S-8337ABHB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V)	SON-8	44ug	-	8o	Sii
ODW	-	S-8337ABHC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V)	SON-8	44ug	-	8o	Sii
ODX	-	S-8337ABIA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V)	SON-8	44ug	-	8o	Sii
ODY	-	S-8337ABIB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V)	SON-8	44ug	-	8o	Sii
ODZ	-	S-8337ABIC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V)	SON-8	44ug	-	8o	Sii
OI2	-	S-8338ABAC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIA	-	S-8338ABAA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIB	-	S-8338ABAB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIC	-	S-8338ABBA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V), -Shutdwon	SON-8	44ue	-	8o	Sii
OID	-	S-8338ABBB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIE	-	S-8338ABBC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIF	-	S-8338ABCA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIG	-	S-8338ABCB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIH	-	S-8338ABCC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V), -Shutdwon	SON-8	44ue	-	8o	Sii
OII	-	S-8338ABDA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIJ	-	S-8338ABDB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIK	-	S-8338ABDC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIL	-	S-8338ABEA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIM	-	S-8338ABEB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIN	-	S-8338ABEC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIO	-	S-8338ABFA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIP	-	S-8338ABFB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIQ	-	S-8338ABFC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIR	-	S-8338ABGA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIS	-	S-8338ABGB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIT	-	S-8338ABGC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIU	-	S-8338ABHA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIV	-	S-8338ABHB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIW	-	S-8338ABHC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIX	-	S-8338ABIA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V), -Shutdwon	SON-8	44ue	-	8o	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
OIY	-	S-8338ABIB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V), -Shutdwon	SON-8	44ue	-	8o	Sii
OIZ	-	S-8338ABIC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V), -Shutdwon	SON-8	44ue	-	8o	Sii
OJ2	-	S-8337ACAC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V)	SON-8	44ug	-	8o	Sii
OJA	-	S-8337ACAA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V)	SON-8	44ug	-	8o	Sii
OJB	-	S-8337ACAB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V)	SON-8	44ug	-	8o	Sii
OJC	-	S-8337ACBA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V)	SON-8	44ug	-	8o	Sii
OJD	-	S-8337ACBB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V)	SON-8	44ug	-	8o	Sii
OJE	-	S-8337ACBC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V)	SON-8	44ug	-	8o	Sii
OJF	-	S-8337ACCA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V)	SON-8	44ug	-	8o	Sii
OJG	-	S-8337ACCB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V)	SON-8	44ug	-	8o	Sii
OJH	-	S-8337ACCC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V)	SON-8	44ug	-	8o	Sii
OJI	-	S-8337ACDA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V)	SON-8	44ug	-	8o	Sii
OJJ	-	S-8337ACDB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V)	SON-8	44ug	-	8o	Sii
OJK	-	S-8337ACDC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V)	SON-8	44ug	-	8o	Sii
OJL	-	S-8337ACEA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V)	SON-8	44ug	-	8o	Sii
OJM	-	S-8337ACEB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V)	SON-8	44ug	-	8o	Sii
OJN	-	S-8337ACEC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V)	SON-8	44ug	-	8o	Sii
OJO	-	S-8337ACFA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V)	SON-8	44ug	-	8o	Sii
OJP	-	S-8337ACFB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V)	SON-8	44ug	-	8o	Sii
OJQ	-	S-8337ACFC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V)	SON-8	44ug	-	8o	Sii
OJR	-	S-8337ACGA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V)	SON-8	44ug	-	8o	Sii
OJS	-	S-8337ACGB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V)	SON-8	44ug	-	8o	Sii
OJT	-	S-8337ACGC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V)	SON-8	44ug	-	8o	Sii
OJU	-	S-8337ACHA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V)	SON-8	44ug	-	8o	Sii
OJV	-	S-8337ACHB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V)	SON-8	44ug	-	8o	Sii
OJW	-	S-8337ACHC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V)	SON-8	44ug	-	8o	Sii
OJX	-	S-8337ACIA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V)	SON-8	44ug	-	8o	Sii
OJY	-	S-8337ACIB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V)	SON-8	44ug	-	8o	Sii
OJZ	-	S-8337ACIC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V)	SON-8	44ug	-	8o	Sii
OK2	-	S-8338ACAC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKA	-	S-8338ACAA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKB	-	S-8338ACAB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.3V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKC	-	S-8338ACBA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKD	-	S-8338ACBB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKE	-	S-8338ACBC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.2V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKF	-	S-8338ACCA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKG	-	S-8338ACCB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKH	-	S-8338ACCC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.1V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKI	-	S-8338ACDA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKJ	-	S-8338ACDB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKK	-	S-8338ACDC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(2.0V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKL	-	S-8338ACEA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKM	-	S-8338ACEB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKN	-	S-8338ACEC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.9V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKO	-	S-8338ACFA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKP	-	S-8338ACFB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKQ	-	S-8338ACFC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.8V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKR	-	S-8338ACGA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKS	-	S-8338ACGB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKT	-	S-8338ACGC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.7V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKU	-	S-8338ACHA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKV	-	S-8338ACHB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKW	-	S-8338ACHC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.6V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKX	-	S-8338ACIA-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKY	-	S-8338ACIB-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V), -Shutdwon	SON-8	44ue	-	8o	Sii
OKZ	-	S-8338ACIC-P8T1G	SVR-IC	Step-up PWM Sw. regulator, UVLO(1.5V), -Shutdwon	SON-8	44ue	-	8o	Sii
OO	-	HSMS-282R	Si-diode	Quad, Schottky, RF, 15V, 1A, Vf<0.34V(1mA), <1pF, 12Ω(5mA)	SOT-363	33by	-	7b	Agi
OTA	-	S-1170B15PD-OTATF	LVR-IC	LDO, 1.5V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTB	-	S-1170B16PD-OTBTF	LVR-IC	LDO, 1.6V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTC	-	S-1170B17PD-OTCTF	LVR-IC	LDO, 1.7V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTD	-	S-1170B18PD-OTDTF	LVR-IC	LDO, 1.8V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTE	-	S-1170B19PD-OTETF	LVR-IC	LDO, 1.9V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTF	-	S-1170B20PD-OTFTF	LVR-IC	LDO, 2.0V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTG	-	S-1170B21PD-OTGTF	LVR-IC	LDO, 2.1V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTH	-	S-1170B22PD-OTHTF	LVR-IC	LDO, 2.2V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTI	-	S-1170B23PD-OTITF	LVR-IC	LDO, 2.3V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTJ	-	S-1170B24PD-OTJTF	LVR-IC	LDO, 2.4V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTK	-	S-1170B25PD-OTKTF	LVR-IC	LDO, 2.5V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTL	-	S-1170B26PD-OTLTF	LVR-IC	LDO, 2.6V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTM	-	S-1170B27PD-OTMTF	LVR-IC	LDO, 2.7V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
OTN	-	S-1170B28PD-OTNTF	LVR-IC	LDO, 2.8V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTO	-	S-1170B29PD-OTOTF	LVR-IC	LDO, 2.9V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTP	-	S-1170B30PD-OTPTF	LVR-IC	LDO, 3.0V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTQ	-	S-1170B31PD-OTQTF	LVR-IC	LDO, 3.1V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTR	-	S-1170B32PD-OTRTF	LVR-IC	LDO, 3.2V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTS	-	S-1170B33PD-OTSTF	LVR-IC	LDO, 3.3V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTT	-	S-1170B34PD-OTTTF	LVR-IC	LDO, 3.4V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTU	-	S-1170B35PD-OTUTF	LVR-IC	LDO, 3.5V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTV	-	S-1170B36PD-OTVTF	LVR-IC	LDO, 3.6V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTW	-	S-1170B37PD-OTWTF	LVR-IC	LDO, 3.7V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTX	-	S-1170B38PD-OTXTF	LVR-IC	LDO, 3.8V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTY	-	S-1170B39PD-OTYTF	LVR-IC	LDO, 3.9V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OTZ	-	S-1170B40PD-OTZTF	LVR-IC	LDO, 4.0V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OUA	-	S-1170B41PD-OUATF	LVR-IC	LDO, 4.1V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OUB	-	S-1170B42PD-OUBTF	LVR-IC	LDO, 4.2V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OUC	-	S-1170B43PD-OUCTF	LVR-IC	LDO, 4.3V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OUD	-	S-1170B44PD-OUDTF	LVR-IC	LDO, 4.4V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OUE	-	S-1170B45PD-OUETF	LVR-IC	LDO, 4.5V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OUF	-	S-1170B46PD-OUFTF	LVR-IC	LDO, 4.6V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OUG	-	S-1170B47PD-OUGTF	LVR-IC	LDO, 4.7V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OUH	-	S-1170B48PD-OUHTF	LVR-IC	LDO, 4.8V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OUI	-	S-1170B49PD-OUITF	LVR-IC	LDO, 4.9V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OUJ	-	S-1170B50PD-OUJTF	LVR-IC	LDO, 5.0V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OUK	-	S-1170B51PD-OUKTF	LVR-IC	LDO, 5.1V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OUL	-	S-1170B52PD-OULTF	LVR-IC	LDO, 5.2V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OUM	-	S-1170B53PD-OUMTF	LVR-IC	LDO, 5.3V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OUN	-	S-1170B54PD-OUNTF	LVR-IC	LDO, 5.4V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
OUO	-	S-1170B55PD-OUOTF	LVR-IC	LDO, 5.5V±1.0%, 800mA, +CE	HSON-6	34vr	VR4	7g	Sii
P0	-	R1131D301B	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
P0	-	R1225N122A	DC-DC-IC	VFM/PWM step-down, 1.2V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
p00	-	74AUP2G00DC	CMOS-Log	Dual 2-input NAND gates	SOT765-1	55	Log50	8d	Nxp
P018	-	R1516S018B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P019	-	R1516S019B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
p02	-	74AUP2G02DC	CMOS-Log	Dual 2-input NOR gates	SOT765-1	55	Log53	8d	Nxp
P020	-	R1516S020B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P021	-	R1516S021B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P022	-	R1516S022B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P023	-	R1516S023B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P024	-	R1516S024B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P025	-	R1516S025B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P026	-	R1516S026B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P027	-	R1516S027B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P028	-	R1516S028B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P029	-	R1516S029B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P030	-	R1516S030B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P031	-	R1516S031B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P032	-	R1516S032B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P033	-	R1516S033B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P034	-	R1516S034B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P035	-	R1516S035B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P036	-	R1516S036B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P037	-	R1516S037B	LVR-IC	LDO, 3.7V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P038	-	R1516S038B	LVR-IC	LDO, 3.8V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P039	-	R1516S039B	LVR-IC	LDO, 3.9V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P040	-	R1516S040B	LVR-IC	LDO, 4.0V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P041	-	R1516S041B	LVR-IC	LDO, 4.1V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P042	-	R1516S042B	LVR-IC	LDO, 4.2V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P043	-	R1516S043B	LVR-IC	LDO, 4.3V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P044	-	R1516S044B	LVR-IC	LDO, 4.4V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P045	-	R1516S045B	LVR-IC	LDO, 4.5V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P046	-	R1516S046B	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P047	-	R1516S047B	LVR-IC	LDO, 4.7V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P048	-	R1516S048B	LVR-IC	LDO, 4.8V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P049	-	R1516S049B	LVR-IC	LDO, 4.9V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P050	-	R1516S050B	LVR-IC	LDO, 5.0V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P051	-	R1516S051B	LVR-IC	LDO, 5.1V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P052	-	R1516S052B	LVR-IC	LDO, 5.2V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P053	-	R1516S053B	LVR-IC	LDO, 5.3V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P054	-	R1516S054B	LVR-IC	LDO, 5.4V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P055	-	R1516S055B	LVR-IC	LDO, 5.5V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P056	-	R1516S056B	LVR-IC	LDO, 5.6V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P057	-	R1516S057B	LVR-IC	LDO, 5.7V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P058	-	R1516S058B	LVR-IC	LDO, 5.8V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P059	-	R1516S059B	LVR-IC	LDO, 5.9V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P06	-	DDA123JH	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=2.2k/47k	SOT-563	35	TD4	7k	Di
P06	-	DDA123JK	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=2k2/47k	SOT-26	33	TD4	7k	Di
P06	-	DDA123JU	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2k2/47k	SOT-363	33	TD4	7k	Di
P060	-	R1516S060B	LVR-IC	LDO, 6.0V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P061	-	R1516S061B	LVR-IC	LDO, 6.1V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P062	-	R1516S062B	LVR-IC	LDO, 6.2V±1%, 150mA, +CE	HSOP-6J	wh	VR4	7h	Ric
P07	-	DDA143TH	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 150mW, R1=4.7k	SOT-563	35	TD4	7k	Di
P07	-	DDA143TK	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1=4.7k	SOT-26	33	TD4	7k	Di
P07	-	DDA143TU	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4k7	SOT-363	33	TD4	7k	Di
p08	-	74AUP2G08DC	CMOS-Log	Dual 2-input AND gates	SOT765-1	55	Log51	8d	Nxp
P08	-	DDA143EH	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=4.7k/4.7k	SOT-563	35	TD4	7k	Di
P1	-	1PS74SB23	Si-diode	SBD, U-Fast, Sw, 25V, 1A, <100pF	SOT-457	33bi	-	7b	Phi
P1	-	R1131D311B	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
P1	-	R1225N152A	DC-DC-IC	VFM/PWM step-down, 1.5V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
P12	-	DDA114TH	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 150mW, R=10k	SOT-563	35	TD2	7k	Di
P12	-	DDA114TK	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1=10k	SOT-26	33	TD2	7k	Di
P12	-	DDA114TU	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	SOT-363	33	TD2	7k	Di
P12D	-	ZXT13P12DE6	Si-pnp	Lo-sat, Sw, 20V, 4A, 55MHz	SOT-363	33t4	-	7b	Zx
P13	-	DDA114EH	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=10k/10k	SOT-563	35	TD2	7k	Di
P13	-	DDA114EK	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=10k/10k	SOT-26	33	TD2	7k	Di
P13	-	DDA114EU	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	SOT-363	33	TD2	7k	Di
P14	-	DDA114YH	Si-pnp-Digi	Dual, Sw, 50V, 0.1A, 0.15W, R1/R2=10k/47k	SOT-563	35	TD2	7k	Di
P14	-	DDA114YK	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=10k/47k	SOT-26	33	TD4	7k	Di
P14	-	DDA114YU	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	SOT-363	33	TD4	7k	Di
P17	-	DDA124EH	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=22k/22k	SOT-563	35	TD4	7k	Di
P17	-	DDA124EK	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=22k/22k	SC-74R	33	TD4	7k	Di
P17	-	DDA124EU	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SOT-363	33	TD4	7k	Di
P17	-	DDC124EK	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	SC-74R	33	TD3	7l	Di
P2	-	1PS74SB43	Si-diode	SBD, U-Fast, Sw, 40V, 1A, <80pF	SOT-457	33bi	-	7b	Phi
P2	-	KRA766E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=1k/10k	TES6	35	TD4	7k	Kec
P2	-	KRA766U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=1k/10k	US6	33	TD7	7k	Kec
P2	-	R1131D321B	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
P2	-	R1225N182A	DC-DC-IC	VFM/PWM step-down, 1.8V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
P2	-	TK11220M	LVR-IC	LDO, 2.0V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P2	hb	TK11222M	LVR-IC	LDO, 2.2V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P2	ha	TK11225M	LVR-IC	LDO, 2.5V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P2	he	TK11227M	LVR-IC	LDO, 2.7V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P20	-	DDA144EH	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=47k/47k	SOT-563	35	TD4	7k	Di
P20	-	DDA144EK	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=47k/47k	SOT-26	33	TD4	7k	Di
P20	-	DDA144EU	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	SOT-363	33	TD4	7k	Di
P20	-	TK11220AM	LVR-IC	LDO, 2.0V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P20D	-	ZXT13P20DE6	Si-pnp	Lo-sat, Sw, 25V, 4A, 90MHz	SOT-363	33t4	-	7b	Zx
P21	-	TK11221AM	LVR-IC	LDO, 2.1V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P22	-	TK11222AM	LVR-IC	LDO, 2.2V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
p25	-	74AUP2G125DC	CMOS-Log	Dual bus buffer with 3-state output	SOT765-1	55	Log54	8d	Nxp
P25	-	TK11225AM	LVR-IC	LDO, 2.5V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
p26	-	74AUP2G126DC	CMOS-Log	Dual bus buffer with 3-state output	SOT765-1	55	Log55	8d	Nxp
P28	-	TK11228AM	LVR-IC	LDO, 2.8V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P29	-	TK11229AM	LVR-IC	LDO, 2.9V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P3	-	R1131D331B	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
P3	-	R1225N252A	DC-DC-IC	VFM/PWM step-down, 2.5V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
P3	-	TK11230M	LVR-IC	LDO, 3.0V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P3	hb	TK11232M	LVR-IC	LDO, 3.2V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P3	ha	TK11235M	LVR-IC	LDO, 3.5V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P30	-	TK11230AM	LVR-IC	LDO, 3.0V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P31	-	TK11231AM	LVR-IC	LDO, 3.1V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
p32	-	74AUP2G32DC	CMOS-Log	Dual 2-input OR gates	SOT765-1	55	Log52	8d	Nxp
P33	-	TK11233AM	LVR-IC	LDO, 3.3V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P34	-	74HC3G34DC	CMOS-Log	Triple non-inverter buffers	SOT765-1	55	Log69	8d	Nxp
P35	-	TK11235AM	LVR-IC	LDO, 3.5V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P36	-	TK11236AM	LVR-IC	LDO, 3.6V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P38	-	TK11238AM	LVR-IC	LDO, 3.8V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
p4	-	74AUP2G04GW	CMOS-Log	Dual inverters	SOT-363	33	Log24	7b	Nxp
P4	-	KRA767E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	TES6	35	TD4	7k	Kec
P4	-	KRA767U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	US6	33	TD7	7k	Kec
P4	-	R1225N332A	DC-DC-IC	VFM/PWM step-down, 3.3V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P4	-	TK11240M	LVR-IC	LDO, 4.0V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P4	ha	TK11245M	LVR-IC	LDO, 4.5V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P4	he	TK11247M	LVR-IC	LDO, 4.7V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
p40	-	74AUP2G240DC	CMOS-Log	Dual bus buffer inverted with 3-state output	SOT765-1	55	Log67	8d	Nxp
P40	-	TK11240AM	LVR-IC	LDO, 4.0V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
p41	-	74AUP2G241DC	CMOS-Log	Dual bus buffer non-inverted with 3-state output	SOT765-1	55	Log60	8d	Nxp
P42	-	TK11242AM	LVR-IC	LDO, 4.2V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P45	-	TK11245AM	LVR-IC	LDO, 4.5V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P48	-	TK11248AM	LVR-IC	LDO, 4.8V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P49	-	TK11249AM	LVR-IC	LDO, 4.9V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P4A	-	S-1167B15-I6T2G	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4B	-	S-1167B16-I6T2G	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4C	-	S-1167B17-I6T2G	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4D	-	S-1167B18-I6T2G	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4E	-	S-1167B19-I6T2G	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4F	-	S-1167B20-I6T2G	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4G	-	S-1167B21-I6T2G	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4H	-	S-1167B22-I6T2G	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4I	-	S-1167B23-I6T2G	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4J	-	S-1167B24-I6T2G	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4K	-	S-1167B25-I6T2G	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4L	-	S-1167B26-I6T2G	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4M	-	S-1167B27-I6T2G	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4N	-	S-1167B28-I6T2G	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4O	-	S-1167B29-I6T2G	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4P	-	S-1167B30-I6T2G	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4Q	-	S-1167B31-I6T2G	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4R	-	S-1167B32-I6T2G	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4S	-	S-1167B33-I6T2G	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4T	-	S-1167B34-I6T2G	LVR-IC	LDO, 3.4V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4U	-	S-1167B35-I6T2G	LVR-IC	LDO, 3.5V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4V	-	S-1167B36-I6T2G	LVR-IC	LDO, 3.6V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4W	-	S-1167B37-I6T2G	LVR-IC	LDO, 3.7V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4X	-	S-1167B38-I6T2G	LVR-IC	LDO, 3.8V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4Y	-	S-1167B39-I6T2G	LVR-IC	LDO, 3.9V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P4Z	-	S-1167B40-I6T2G	LVR-IC	LDO, 4.0V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
p5	-	74AUP1T45GW	CMOS-Log	Dual supply translating transceiver with 3-state output	SOT-363	33	Log70	7b	Nxp
P5	-	KRA768E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	TES6	35	TD4	7k	Kec
P5	-	KRA768U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	US6	33	TD7	7k	Kec
P5	-	R1225N502A	DC-DC-IC	VFM/PWM step-down, 5V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
P5	-	TK11250M	LVR-IC	LDO, 5.0V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P5	hb	TK11255M	LVR-IC	LDO, 5.5V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P50	-	TK11250AM	LVR-IC	LDO, 5.0V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P55	-	TK11255AM	LVR-IC	LDO, 5.5V±2.4%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
P5A	-	S-1167B41-I6T2G	LVR-IC	LDO, 4.1V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P5B	-	S-1167B42-I6T2G	LVR-IC	LDO, 4.2V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P5C	-	S-1167B43-I6T2G	LVR-IC	LDO, 4.3V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P5D	-	S-1167B44-I6T2G	LVR-IC	LDO, 4.4V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P5E	-	S-1167B45-I6T2G	LVR-IC	LDO, 4.5V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P5F	-	S-1167B46-I6T2G	LVR-IC	LDO, 4.6V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P5G	-	S-1167B47-I6T2G	LVR-IC	LDO, 4.7V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P5H	-	S-1167B48-I6T2G	LVR-IC	LDO, 4.8V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P5I	-	S-1167B49-I6T2G	LVR-IC	LDO, 4.9V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P5J	-	S-1167B50-I6T2G	LVR-IC	LDO, 5.0V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P5K	-	S-1167B51-I6T2G	LVR-IC	LDO, 5.1V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P5L	-	S-1167B52-I6T2G	LVR-IC	LDO, 5.2V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P5M	-	S-1167B53-I6T2G	LVR-IC	LDO, 5.3V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P5N	-	S-1167B54-I6T2G	LVR-IC	LDO, 5.4V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P5O	-	S-1167B55-I6T2G	LVR-IC	LDO, 5.5V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
P6	-	KRA769E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	TES6	35	TD4	7k	Kec
P6	-	KRA769U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	US6	33	TD7	7k	Kec
P6	-	R1225N552A	DC-DC-IC	VFM/PWM step-down, 5.5V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
p7	-	74AUP2G07GW	CMOS-Log	Dual noninverting buffers/drivers (ODO)	SOT-363	33	Log26	7b	Nxp
P7	-	BAS70-07P	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-666	35dw	-	7b	Ste
P7	-	KRA770E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/4.7k	TES6	35	TD4	7k	Kec
P7	-	KRA770U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/4.7k	US6	33	TD7	7k	Kec
P7	-	R1225N602A	DC-DC-IC	VFM/PWM step-down, 6V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
p74	-	74AUP1G74DC	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	SOT765-1	55	Log59	8d	Nxp
p79	-	74AUP2G79DC	CMOS-Log	Dual positive-edge triggered D-type flip-flop	SOT765-1	55	Log63	8d	Nxp
P8	-	KRA771E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	TES6	35	TD4	7k	Kec





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P8	-	KRA771U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	US6	33	TD7	7k	Kec
P8	-	R1225N122B	DC-DC-IC	VFM/PWM step-down, 1.2V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
p80	-	74AUP2G80DC	CMOS-Log	Dual positive-edge triggered D-type flip-flop	SOT765-1	55	Log64	8d	Nxp
P81	-	DDA122LH	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=0.22k/10k	SOT-563	35	TD4	7k	Di
P81	-	DDA122LU	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=0.22k/10k	SOT-363	33	TD4	7k	Di
P82	-	DDA142JH	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 150mW, R1/R2=0.47k/10k	SOT-563	35	TD4	7k	Di
P82	-	DDA142JU	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=0.47k/10k	SOT-363	33	TD4	7k	Di
P83	-	DDA122TH	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 150mW, R1=0.22k	SOT-563	35	TD4	7k	Di
P83	-	DDA122TU	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=0.22k	SOT-363	33	TD4	7k	Di
P8303A	-	PAM8303ABSC	Lin-IC	AF PA, BTL, class-D, 2.8..5.5V, 3W(5V/4Ω), shutdown	MSOP-8	55	AFP63	8d	Pam
P8303C	-	PAM8303CBSC	Lin-IC	AF PA, BTL, class-D, 2.8..5.5V, 3W(5V/4Ω), shutdown	MSOP-8	55	AFP63	8d	Pam
P8303D	-	PAM8303DBSC	Lin-IC	AF PA, BTL, class-D, 2.8..5.5V, 3W(5V/4Ω), shutdown	MSOP-8	55	AFP63	8d	Pam
P84	-	DDA142TH	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 150mW, R1=0.47k	SOT-563	35	TD4	7k	Di
P84	-	DDA142TU	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=0.47k	SOT-363	33	TD4	7k	Di
P8401	-	PAM8401ASM	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x1.5W(5V/8Ω), shutdown	MSOP-10	60	-	8d	Pam
p86	-	74AUP2G86DC	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	SOT765-1	55	Log65	8d	Nxp
P9	-	KRA772E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	TES6	35	TD4	7k	Kec
P9	-	KRA772U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	US6	33	TD7	7k	Kec
P9	-	R1225N152B	DC-DC-IC	VFM/PWM step-down, 1.5V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
PA	-	KRA721T	Si-pnp-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=1k/1k	TS6	33	TD4	7k	Kec
PA	-	KRA751E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	TES6	35	TD4	7k	Kec
PA	-	KRA751U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	US6	33	TD7	7k	Kec
PA	-	R1225N182B	DC-DC-IC	VFM/PWM step-down, 1.8V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
PA	-	Si1902DL	n-MOSFET	Dual, V-MOS, LogL, 20V, ±0.66A, <0.63Ω(0.4A), <50/40ns	SOT-363	33	T13	7b	Six
PA	-	XC6602A051MR-G	LVR-IC	LDO, 0.5V±15mV, 1A, +CE, soft start	SOT-26W	zk	VR11	7d	Tor
PAs	-	BCP72M	Si-pnp	AF-Dr/Out, 10V, 3A, 1.7W, B=85..475, 100MHz	SCT-595	71uo	-	7l	Inf
PB	-	KRA722T	Si-pnp-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=2.2k/2.2k	TS6	33	TD4	7k	Kec
PB	-	KRA752E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	TES6	35	TD4	7k	Kec
PB	-	KRA752U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	US6	33	TD7	7k	Kec
PB	-	R1225N252B	DC-DC-IC	VFM/PWM step-down, 2.5V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
PB	-	XC6602A061MR-G	LVR-IC	LDO, 0.6V±15mV, 1A, +CE, soft start	SOT-26W	zk	VR11	7d	Tor
PBs	-	BCP70M	Si-pnp	AF-Dr/Out, 25V, 3A, 1.7W, B=85..475, 100MHz	SCT-595	71uo	-	7l	Inf
PC	-	KRA723T	Si-pnp-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=4.7k/4.7k	TS6	33	TD4	7k	Kec
PC	-	KRA753E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	TES6	35	TD4	7k	Kec
PC	-	KRA753U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	US6	33	TD7	7k	Kec
PC	-	R1225N332B	DC-DC-IC	VFM/PWM step-down, 3.3V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
PC	-	XC6602A071MR-G	LVR-IC	LDO, 0.7V±15mV, 1A, +CE, soft start	SOT-26W	zk	VR11	7d	Tor
PCs	-	BCP71M	Si-npn	AF-Dr/Out, 32V, 3A, 1.7W, B=85..475, 100MHz	SCT-595	71uo	-	7l	Inf
PD	-	KRA724T	Si-pnp-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=10k/10k	TS6	33	TD4	7k	Kec
PD	-	KRA754E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	TES6	35	TD4	7k	Kec
PD	-	KRA754U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	US6	33	TD7	7k	Kec
PD	-	R1225N502B	DC-DC-IC	VFM/PWM step-down, 5V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
PD	-	XC6602A081MR-G	LVR-IC	LDO, 0.8V±15mV, 1A, +CE, soft start	SOT-26W	zk	VR11	7d	Tor
PE	-	KRA725T	Si-pnp-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=1k/10k	TS6	33	TD4	7k	Kec
PE	-	KRA755E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	TES6	35	TD4	7k	Kec
PE	-	KRA755U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	US6	33	TD7	7k	Kec
PE	-	R1225N552B	DC-DC-IC	VFM/PWM step-down, 5.5V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
PE	-	XC6602A091MR-G	LVR-IC	LDO, 0.9V±15mV, 1A, +CE, soft start	SOT-26W	zk	VR11	7d	Tor
PF	-	KRA726T	Si-pnp-Digi	Dual, Sw, 50V, 800mA, 900mW, R1/R2=2.2k/10k	TS6	33	TD4	7k	Kec
PF	-	KRA756E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	TES6	35	TD4	7k	Kec
PF	-	KRA756U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	US6	33	TD7	7k	Kec
PF	-	R1225N602B	DC-DC-IC	VFM/PWM step-down, 6V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
PF	-	XC6602A101MR-G	LVR-IC	LDO, 1.0V±15mV, 1A, +CE, soft start	SOT-26W	zk	VR11	7d	Tor
PFWI	-	TPS3103E12D	Vdet-IC	1.142V±1%, -MR, -Reset ODO	SOP-6	33ma	-	7b	Ti
PFXI	-	TPS3103E15D	Vdet-IC	1.434V±1%, -MR, -Reset ODO	SOP-6	33ma	-	7b	Ti
PFYI	-	TPS3103H20D	Vdet-IC	1.84V±1%, -MR, -Reset ODO	SOP-6	33ma	-	7b	Ti
PFZI	-	TPS3106E09D	Vdet-IC	0.86V±1%, -MR, -Reset ODO	SOP-6	33mb	-	7b	Ti
PG	-	R1225N122J	DC-DC-IC	VFM/PWM step-down, 1.2V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
PGBI	-	TPS3106K33D	Vdet-IC	2.941V±1%, -MR, -Reset ODO	SOP-6	33mb	-	7b	Ti
PGII	-	TPS3110E09D	Vdet-IC	0.86V±1%, -MR, -Reset PPO	SOP-6	33mc	-	7b	Ti
PGJI	-	TPS3110E12D	Vdet-IC	1.142V±1%, -MR, -Reset PPO	SOP-6	33mc	-	7b	Ti
PGKI	-	TPS3110E15D	Vdet-IC	1.434V±1%, -MR, -Reset PPO	SOP-6	33mc	-	7b	Ti
PGLI	-	TPS3110K33D	Vdet-IC	2.941V±1%, -MR, -Reset PPO	SOP-6	33mc	-	7b	Ti
PGRI	-	TPS3103K33D	Vdet-IC	2.941V±1%, -MR, -Reset ODO	SOP-6	33ma	-	7b	Ti
PGSI	-	TPS3106E16D	Vdet-IC	1.521V±1%, -MR, -Reset ODO	SOP-6	33mb	-	7b	Ti
PH	-	KRA757E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	TES6	35	TD4	7k	Kec
PH	-	KRA757U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	US6	33	TD7	7k	Kec
PH	-	R1225N152J	DC-DC-IC	VFM/PWM step-down, 1.5V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
PH	-	XC6602A111MR-G	LVR-IC	LDO, 1.1V±15mV, 1A, +CE, soft start	SOT-26W	zk	VR11	7d	Tor
PI	-	KRA758E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	TES6	35	TD4	7k	Kec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PI	-	KRA758U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	US6	33	TD7	7k	Kec
PJ	-	DDZX20CTS	Z-diode	Triple, 20V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
PJ	-	KRA759E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	TES6	35	TD4	7k	Kec
PJ	-	KRA759U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	US6	33	TD7	7k	Kec
PJ	-	R1225N182J	DC-DC-IC	VFM/PWM step-down, 1.8V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
PJAI	-	TPS64200DBVR	SVR-IC	Step-down controller, adjustable 1.2V..Vin	SOT-23-6	33yk	-	7b	Ti
PJBI	-	TPS64201DBVR	SVR-IC	Step-down controller, adjustable 1.2V..Vin	SOT-23-6	33yk	-	7b	Ti
PJCI	-	TPS64202DBVR	SVR-IC	Step-down controller, adjustable 1.2V..Vin	SOT-23-6	33yk	-	7b	Ti
PJDI	-	TPS64203DBVR	SVR-IC	Step-down controller, adjustable 1.2V..Vin	SOT-23-6	33yk	-	7b	Ti
pK	-	74AUP2G14GW	CMOS-Log	Dual Schmitt-trigger inverter buffers	SOT-363	33	Log34	7b	Nxp
PK	-	KRA760E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4.7k	TES6	35	TD4	7k	Kec
PK	-	KRA760U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4.7k	US6	33	TD7	7k	Kec
PK	-	R1225N252J	DC-DC-IC	VFM/PWM step-down, 2.5V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
PK	-	XC6602A121MR-G	LVR-IC	LDO, 1.2V±20mV, 1A, +CE, soft start	SOT-26W	zk	VR11	7d	Tor
PL	-	DDZX24CTS	Z-diode	Triple, 24V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
PL	-	R1225N332J	DC-DC-IC	VFM/PWM step-down, 3.3V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
PL	-	XC6602A131MR-G	LVR-IC	LDO, 1.3V±20mV, 1A, +CE, soft start	SOT-26W	zk	VR11	7d	Tor
PM	-	KRA761E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	TES6	35	TD4	7k	Kec
PM	-	KRA761U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	US6	33	TD7	7k	Kec
PM	-	R1225N502J	DC-DC-IC	PWM step-down, 5V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
PM	-	XC6602A141MR-G	LVR-IC	LDO, 1.4V±20mV, 1A, +CE, soft start	SOT-26W	zk	VR11	7d	Tor
PN	-	KRA762E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=100k	TES6	35	TD4	7k	Kec
PN	-	KRA762U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=100k	US6	33	TD7	7k	Kec
PN	-	R1225N552J	DC-DC-IC	VFM/PWM step-down, 5.5V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
PN	-	XC6602A151MR-G	LVR-IC	LDO, 1.5V±20mV, 1A, +CE, soft start	SOT-26W	zk	VR11	7d	Tor
PO	-	KRA763E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=22k	TES6	35	TD4	7k	Kec
PO	-	KRA763U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=22k	US6	33	TD7	7k	Kec
POA	-	S-1200B15-A6T1S	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POA	-	S-1200B15-I6T2G	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POB	-	S-1200B16-A6T1S	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POB	-	S-1200B16-I6T2G	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POC	-	S-1200B17-A6T1S	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POC	-	S-1200B17-I6T2G	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POD	-	S-1200B18-A6T1S	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POD	-	S-1200B18-I6T2G	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POE	-	S-1200B19-A6T1S	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POE	-	S-1200B19-I6T2G	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POF	-	S-1200B20-A6T1S	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POF	-	S-1200B20-I6T2G	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POG	-	S-1200B21-A6T1S	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POG	-	S-1200B21-I6T2G	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POH	-	S-1200B22-A6T1S	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POH	-	S-1200B22-I6T2G	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POI	-	S-1200B23-A6T1S	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POI	-	S-1200B23-I6T2G	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POJ	-	S-1200B24-A6T1S	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POJ	-	S-1200B24-I6T2G	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POK	-	S-1200B25-A6T1S	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POK	-	S-1200B25-I6T2G	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POL	-	S-1200B26-A6T1S	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POL	-	S-1200B26-I6T2G	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POM	-	S-1200B27-A6T1S	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POM	-	S-1200B27-I6T2G	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PON	-	S-1200B28-A6T1S	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
PON	-	S-1200B28-I6T2G	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POO	-	S-1200B29-A6T1S	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POO	-	S-1200B29-I6T2G	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POP	-	S-1200B30-A6T1S	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POP	-	S-1200B30-I6T2G	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POQ	-	S-1200B31-A6T1S	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POQ	-	S-1200B31-I6T2G	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POR	-	S-1200B32-A6T1S	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POR	-	S-1200B32-I6T2G	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POS	-	S-1200B33-A6T1S	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POS	-	S-1200B33-I6T2G	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POT	-	S-1200B34-A6T1S	LVR-IC	LDO, 3.4V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POT	-	S-1200B34-I6T2G	LVR-IC	LDO, 3.4V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POU	-	S-1200B35-A6T1S	LVR-IC	LDO, 3.5V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POU	-	S-1200B35-I6T2G	LVR-IC	LDO, 3.5V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POV	-	S-1200B36-A6T1S	LVR-IC	LDO, 3.6V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
POV	-	S-1200B36-I6T2G	LVR-IC	LDO, 3.6V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POW	-	S-1200B37-A6T1S	LVR-IC	LDO, 3.7V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POW	-	S-1200B37-I6T2G	LVR-IC	LDO, 3.7V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POX	-	S-1200B38-A6T1S	LVR-IC	LDO, 3.8V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POX	-	S-1200B38-I6T2G	LVR-IC	LDO, 3.8V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POY	-	S-1200B39-A6T1S	LVR-IC	LDO, 3.9V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POY	-	S-1200B39-I6T2G	LVR-IC	LDO, 3.9V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
POZ	-	S-1200B40-A6T1S	LVR-IC	LDO, 4.0V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
POZ	-	S-1200B40-I6T2G	LVR-IC	LDO, 4.0V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PP	-	KRA764E	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=47k	TES6	35	TD4	7k	Kec
PP	-	KRA764U	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=47k	US6	33	TD7	7k	Kec
PP	-	NC7S08L6	CMOS-Log	2-input AND gate	MPAK-6	33	Log3	7b	F
PP	-	R1225N602J	DC-DC-IC	VFM/PWM step-down, 6V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
PP	-	XC6602A161MR-G	LVR-IC	LDO, 1.6V±20mV, 1A, +CE, soft start	SOT-26W	zk	VR11	7d	Tor
PPA	-	S-1200B41-A6T1S	LVR-IC	LDO, 4.1V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
PPA	-	S-1200B41-I6T2G	LVR-IC	LDO, 4.1V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PPB	-	S-1200B42-A6T1S	LVR-IC	LDO, 4.2V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
PPB	-	S-1200B42-I6T2G	LVR-IC	LDO, 4.2V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PPC	-	S-1200B43-A6T1S	LVR-IC	LDO, 4.3V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
PPC	-	S-1200B43-I6T2G	LVR-IC	LDO, 4.3V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PPD	-	S-1200B44-A6T1S	LVR-IC	LDO, 4.4V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
PPD	-	S-1200B44-I6T2G	LVR-IC	LDO, 4.4V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PPE	-	S-1200B45-A6T1S	LVR-IC	LDO, 4.5V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
PPE	-	S-1200B45-I6T2G	LVR-IC	LDO, 4.5V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PPF	-	S-1200B46-A6T1S	LVR-IC	LDO, 4.6V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
PPF	-	S-1200B46-I6T2G	LVR-IC	LDO, 4.6V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PPG	-	S-1200B47-A6T1S	LVR-IC	LDO, 4.7V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
PPG	-	S-1200B47-I6T2G	LVR-IC	LDO, 4.7V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PPH	-	S-1200B48-A6T1S	LVR-IC	LDO, 4.8V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
PPH	-	S-1200B48-I6T2G	LVR-IC	LDO, 4.8V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PPI	-	S-1200B49-A6T1S	LVR-IC	LDO, 4.9V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
PPI	-	S-1200B49-I6T2G	LVR-IC	LDO, 4.9V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PPJ	-	S-1200B50-A6T1S	LVR-IC	LDO, 5.0V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
PPJ	-	S-1200B50-I6T2G	LVR-IC	LDO, 5.0V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PPK	-	S-1200B51-A6T1S	LVR-IC	LDO, 5.1V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
PPK	-	S-1200B51-I6T2G	LVR-IC	LDO, 5.1V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PPL	-	S-1200B52-A6T1S	LVR-IC	LDO, 5.2V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
PPL	-	S-1200B52-I6T2G	LVR-IC	LDO, 5.2V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PPM	-	S-1200B53-A6T1S	LVR-IC	LDO, 5.3V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
PPM	-	S-1200B53-I6T2G	LVR-IC	LDO, 5.3V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PPN	-	S-1200B54-A6T1S	LVR-IC	LDO, 5.4V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
PPN	-	S-1200B54-I6T2G	LVR-IC	LDO, 5.4V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PPO	-	S-1200B55-A6T1S	LVR-IC	LDO, 5.5V±1.0%, 150mA, +CE	HSNT-6A	43ep	VR4	7g	Sii
PPO	-	S-1200B55-I6T2G	LVR-IC	LDO, 5.5V±1.0%, 150mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
PQ	-	R1225N302A	DC-DC-IC	VFM/PWM step-down, 3V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
PR	-	R1225N302B	DC-DC-IC	VFM/PWM step-down, 3V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
PR	-	XC6602A171MR-G	LVR-IC	LDO, 1.7V±20mV, 1A, +CE, soft start	SOT-26W	zk	VR11	7d	Tor
PS	-	R1225N302J	DC-DC-IC	VFM/PWM step-down, 3V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
PS	-	XC6602A181MR-G	LVR-IC	LDO, 1.8V±20mV, 1A, +CE, soft start	SOT-26W	zk	VR11	7d	Tor
pS8	-	74AUP1G885DC	CMOS-Log	Dual function gate	SOT765-1	55	Log61	8d	Nxp
pT	-	74AUP1G80GW	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT-363	33	Log21	7b	Nxp
PT	-	R1225N162B	DC-DC-IC	VFM/PWM step-down, 1.6V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
pU	-	74AUP1G11GW	CMOS-Log	3-input AND gate	SOT-363	33	Log30	7b	Nxp
PU	-	R1225N122C	DC-DC-IC	PWM step-down, 1.2V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
PV	-	R1225N152C	DC-DC-IC	PWM step-down, 1.5V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
pW	-	74AUP1G18GW	CMOS-Log	Noninverting 1-of-2 demultiplexer with 3-state deselected output	SOT-363	33	Log44	7b	Nxp
PW	-	R1225N182C	DC-DC-IC	PWM step-down, 1.8V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
PX	-	R1225N252C	DC-DC-IC	PWM step-down, 2.5V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
pY	-	74AUP1G19GW	CMOS-Log	1-of-2 decoder/demultiplexer	SOT-363	33	Log47	7b	Nxp
PY	-	R1225N332C	DC-DC-IC	PWM step-down, 3.3V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
PZ	-	R1225N502C	DC-DC-IC	PWM step-down, 5V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
Q0	-	R1131D181B5	LVR-IC	LDO, 1.85V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
Q0	-	R5210N001A	DC-DC-IC	PWM step-down, Vr=3.4V, DC/DCout=2.7V, Vdet= 4.2V	SOT-23-6W	dc1	-	7da	Ric
Q00B	-	RP132S001B	LVR-IC	LDO, Adj. 0.8..5.5V±1%, 1A, +CE	HSOP-6J	vta	VR16	7e	Ric
Q00D	-	RP132S001D	LVR-IC	LDO, Adj. 0.8..5.5V±1%, 1A, +CE, CL	HSOP-6J	vta	VR16	7e	Ric
Q01B	-	RP132S121B5	LVR-IC	LDO, 1.25V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q01D	-	RP132S121D5	LVR-IC	LDO, 1.25V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q01E	-	RP132S121E5	LVR-IC	LDO, 1.25V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q01F	-	RP132S121F5	LVR-IC	LDO, 1.25V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q02B	-	RP132S181B5	LVR-IC	LDO, 1.85V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Q02D	-	RP132S181D5	LVR-IC	LDO, 1.85V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q02E	-	RP132S181E5	LVR-IC	LDO, 1.85V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q02F	-	RP132S181F5	LVR-IC	LDO, 1.85V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q03B	-	RP132S281B5	LVR-IC	LDO, 2.85V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q03D	-	RP132S281D5	LVR-IC	LDO, 2.85V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q03E	-	RP132S281E5	LVR-IC	LDO, 2.85V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q03F	-	RP132S281F5	LVR-IC	LDO, 2.85V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q08B	-	RP132S081B	LVR-IC	LDO, 0.8V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q08D	-	RP132S081D	LVR-IC	LDO, 0.8V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q08E	-	RP132S081E	LVR-IC	LDO, 0.8V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q08F	-	RP132S081F	LVR-IC	LDO, 0.8V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q09B	-	RP132S091B	LVR-IC	LDO, 0.9V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q09D	-	RP132S091D	LVR-IC	LDO, 0.9V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q09E	-	RP132S091E	LVR-IC	LDO, 0.9V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q09F	-	RP132S091F	LVR-IC	LDO, 0.9V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q1	-	R1131D281B5	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
Q1	-	R5210N002A	DC-DC-IC	PWM step-down, Vr=3.3V, DC/DCout=2.5V, Vdet= 4V	SOT-23-6W	dc1	-	7da	Ric
Q10B	-	RP132S101B	LVR-IC	LDO, 1.0V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q10D	-	RP132S101D	LVR-IC	LDO, 1.0V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q10E	-	RP132S101E	LVR-IC	LDO, 1.0V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q10F	-	RP132S101F	LVR-IC	LDO, 1.0V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q11B	-	RP132S111B	LVR-IC	LDO, 1.1V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q11D	-	RP132S111D	LVR-IC	LDO, 1.1V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q11E	-	RP132S111E	LVR-IC	LDO, 1.1V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q11F	-	RP132S111F	LVR-IC	LDO, 1.1V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q12B	-	RP132S121B	LVR-IC	LDO, 1.2V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q12D	-	RP132S121D	LVR-IC	LDO, 1.2V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q12E	-	RP132S121E	LVR-IC	LDO, 1.2V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q12F	-	RP132S121F	LVR-IC	LDO, 1.2V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q13B	-	RP132S131B	LVR-IC	LDO, 1.3V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q13D	-	RP132S131D	LVR-IC	LDO, 1.3V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q13E	-	RP132S131E	LVR-IC	LDO, 1.3V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q13F	-	RP132S131F	LVR-IC	LDO, 1.3V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q14B	-	RP132S141B	LVR-IC	LDO, 1.4V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q14D	-	RP132S141D	LVR-IC	LDO, 1.4V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q14E	-	RP132S141E	LVR-IC	LDO, 1.4V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q14F	-	RP132S141F	LVR-IC	LDO, 1.4V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q15B	-	RP132S151B	LVR-IC	LDO, 1.5V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q15D	-	RP132S151D	LVR-IC	LDO, 1.5V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q15E	-	RP132S151E	LVR-IC	LDO, 1.5V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q15F	-	RP132S151F	LVR-IC	LDO, 1.5V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q16B	-	RP132S161B	LVR-IC	LDO, 1.6V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q16D	-	RP132S161D	LVR-IC	LDO, 1.6V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q16E	-	RP132S161E	LVR-IC	LDO, 1.6V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q16F	-	RP132S161F	LVR-IC	LDO, 1.6V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q17B	-	RP132S171B	LVR-IC	LDO, 1.7V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q17D	-	RP132S171D	LVR-IC	LDO, 1.7V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q17E	-	RP132S171E	LVR-IC	LDO, 1.7V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q17F	-	RP132S171F	LVR-IC	LDO, 1.7V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q18B	-	RP132S181B	LVR-IC	LDO, 1.8V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q18D	-	RP132S181D	LVR-IC	LDO, 1.8V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q18E	-	RP132S181E	LVR-IC	LDO, 1.8V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q18F	-	RP132S181F	LVR-IC	LDO, 1.8V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q19B	-	RP132S191B	LVR-IC	LDO, 1.9V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q19D	-	RP132S191D	LVR-IC	LDO, 1.9V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q19E	-	RP132S191E	LVR-IC	LDO, 1.9V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q19F	-	RP132S191F	LVR-IC	LDO, 1.9V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q2	-	R1131D121B5	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	SON-6	hq	VR4	7g	Ric
Q2	-	R5210N011C	DC-DC-IC	PWM step-down, Vr=2.6V, DC/DCout=1.6V, Vdet= 4.2V	SOT-23-6W	dc1	-	7da	Ric
Q20	-	TK11320M	LVR-IC	LDO, 2.0V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
Q20B	-	RP132S201B	LVR-IC	LDO, 2.0V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q20D	-	RP132S201D	LVR-IC	LDO, 2.0V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q20E	-	RP132S201E	LVR-IC	LDO, 2.0V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q20F	-	RP132S201F	LVR-IC	LDO, 2.0V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q21B	-	RP132S211B	LVR-IC	LDO, 2.1V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q21D	-	RP132S211D	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q21E	-	RP132S211E	LVR-IC	LDO, 2.1V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q21F	-	RP132S211F	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q22B	-	RP132S221B	LVR-IC	LDO, 2.2V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q22D	-	RP132S221D	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Q22E	-	RP132S221E	LVR-IC	LDO, 2.2V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q22F	-	RP132S221F	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q23B	-	RP132S231B	LVR-IC	LDO, 2.3V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q23D	-	RP132S231D	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q23E	-	RP132S231E	LVR-IC	LDO, 2.3V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q23F	-	RP132S231F	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q24B	-	RP132S241B	LVR-IC	LDO, 2.4V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q24D	-	RP132S241D	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q24E	-	RP132S241E	LVR-IC	LDO, 2.4V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q24F	-	RP132S241F	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q25B	-	RP132S251B	LVR-IC	LDO, 2.5V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q25D	-	RP132S251D	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q25E	-	RP132S251E	LVR-IC	LDO, 2.5V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q25F	-	RP132S251F	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q26B	-	RP132S261B	LVR-IC	LDO, 2.6V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q26D	-	RP132S261D	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q26E	-	RP132S261E	LVR-IC	LDO, 2.6V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q26F	-	RP132S261F	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q27B	-	RP132S271B	LVR-IC	LDO, 2.7V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q27D	-	RP132S271D	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q27E	-	RP132S271E	LVR-IC	LDO, 2.7V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q27F	-	RP132S271F	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q28B	-	RP132S281B	LVR-IC	LDO, 2.8V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q28D	-	RP132S281D	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q28E	-	RP132S281E	LVR-IC	LDO, 2.8V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q28F	-	RP132S281F	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q29B	-	RP132S291B	LVR-IC	LDO, 2.9V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q29D	-	RP132S291D	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q29E	-	RP132S291E	LVR-IC	LDO, 2.9V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q29F	-	RP132S291F	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q3	-	R5210N001C	DC-DC-IC	PWM step-down, Vr=3.4V, DC/DCout=2.7V, Vdet= 4.2V	SOT-23-6W	dc1	-	7da	Ric
Q30	-	TK11330M	LVR-IC	LDO, 3.0V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
Q30B	-	RP132S301B	LVR-IC	LDO, 3.0V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q30D	-	RP132S301D	LVR-IC	LDO, 3.0V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q30E	-	RP132S301E	LVR-IC	LDO, 3.0V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q30F	-	RP132S301F	LVR-IC	LDO, 3.0V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q31B	-	RP132S311B	LVR-IC	LDO, 3.1V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q31D	-	RP132S311D	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q31E	-	RP132S311E	LVR-IC	LDO, 3.1V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q31F	-	RP132S311F	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q32B	-	RP132S321B	LVR-IC	LDO, 3.2V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q32D	-	RP132S321D	LVR-IC	LDO, 3.2V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q32E	-	RP132S321E	LVR-IC	LDO, 3.2V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q32F	-	RP132S321F	LVR-IC	LDO, 3.2V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q33	-	TK11333M	LVR-IC	LDO, 3.3V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
Q33B	-	RP132S331B	LVR-IC	LDO, 3.3V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q33D	-	RP132S331D	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q33E	-	RP132S331E	LVR-IC	LDO, 3.3V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q33F	-	RP132S331F	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q34B	-	RP132S341B	LVR-IC	LDO, 3.4V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q34D	-	RP132S341D	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q34E	-	RP132S341E	LVR-IC	LDO, 3.4V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q34F	-	RP132S341F	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q35B	-	RP132S351B	LVR-IC	LDO, 3.5V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q35D	-	RP132S351D	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q35E	-	RP132S351E	LVR-IC	LDO, 3.5V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q35F	-	RP132S351F	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q36B	-	RP132S361B	LVR-IC	LDO, 3.6V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q36D	-	RP132S361D	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q36E	-	RP132S361E	LVR-IC	LDO, 3.6V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q36F	-	RP132S361F	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q37B	-	RP132S371B	LVR-IC	LDO, 3.7V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q37D	-	RP132S371D	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q37E	-	RP132S371E	LVR-IC	LDO, 3.7V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q37F	-	RP132S371F	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q38B	-	RP132S381B	LVR-IC	LDO, 3.8V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q38D	-	RP132S381D	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q38E	-	RP132S381E	LVR-IC	LDO, 3.8V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q38F	-	RP132S381F	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q39B	-	RP132S391B	LVR-IC	LDO, 3.9V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Q39D	-	RP132S391D	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q39E	-	RP132S391E	LVR-IC	LDO, 3.9V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q39F	-	RP132S391F	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q4	-	R5210N002C	DC-DC-IC	PWM step-down, Vr=3.3V, DC/DCout=2.5V, Vdet= 4V	SOT-23-6W	dc1	-	7da	Ric
Q40	-	TK11340M	LVR-IC	LDO, 4.0V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
Q40B	-	RP132S401B	LVR-IC	LDO, 4.0V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q40D	-	RP132S401D	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q40E	-	RP132S401E	LVR-IC	LDO, 4.0V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q40F	-	RP132S401F	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q41B	-	RP132S411B	LVR-IC	LDO, 4.1V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q41D	-	RP132S411D	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q41E	-	RP132S411E	LVR-IC	LDO, 4.1V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q41F	-	RP132S411F	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q42B	-	RP132S421B	LVR-IC	LDO, 4.2V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q42D	-	RP132S421D	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q42E	-	RP132S421E	LVR-IC	LDO, 4.2V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q42F	-	RP132S421F	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q43B	-	RP132S431B	LVR-IC	LDO, 4.3V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q43D	-	RP132S431D	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q43E	-	RP132S431E	LVR-IC	LDO, 4.3V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q43F	-	RP132S431F	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q44B	-	RP132S441B	LVR-IC	LDO, 4.4V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q44D	-	RP132S441D	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q44E	-	RP132S441E	LVR-IC	LDO, 4.4V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q44F	-	RP132S441F	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q45	-	TK11345M	LVR-IC	LDO, 4.5V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
Q45B	-	RP132S451B	LVR-IC	LDO, 4.5V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q45D	-	RP132S451D	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q45E	-	RP132S451E	LVR-IC	LDO, 4.5V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q45F	-	RP132S451F	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q46B	-	RP132S461B	LVR-IC	LDO, 4.6V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q46D	-	RP132S461D	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q46E	-	RP132S461E	LVR-IC	LDO, 4.6V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q46F	-	RP132S461F	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q47B	-	RP132S471B	LVR-IC	LDO, 4.7V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q47D	-	RP132S471D	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q47E	-	RP132S471E	LVR-IC	LDO, 4.7V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q47F	-	RP132S471F	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q48	-	TK11348M	LVR-IC	LDO, 4.8V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
Q48B	-	RP132S481B	LVR-IC	LDO, 4.8V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q48D	-	RP132S481D	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q48E	-	RP132S481E	LVR-IC	LDO, 4.8V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q48F	-	RP132S481F	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q49B	-	RP132S491B	LVR-IC	LDO, 4.9V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q49D	-	RP132S491D	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q49E	-	RP132S491E	LVR-IC	LDO, 4.9V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q49F	-	RP132S491F	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q5	-	R5210N003C	DC-DC-IC	PWM step-down, Vr=3.3V, DC/DCout=2.5V, Vdet= 4.2V	SOT-23-6W	dc1	-	7da	Ric
Q50	-	TK11350M	LVR-IC	LDO, 5.0V±5%, 170mA, -CE	SOT-23L-6	33vf	VR7	7b	Tok
Q50B	-	RP132S501B	LVR-IC	LDO, 5.0V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q50D	-	RP132S501D	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q50E	-	RP132S501E	LVR-IC	LDO, 5.0V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q50F	-	RP132S501F	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q51B	-	RP132S511B	LVR-IC	LDO, 5.1V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q51D	-	RP132S511D	LVR-IC	LDO, 5.1V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q51E	-	RP132S511E	LVR-IC	LDO, 5.1V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q51F	-	RP132S511F	LVR-IC	LDO, 5.1V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q52B	-	RP132S521B	LVR-IC	LDO, 5.2V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q52D	-	RP132S521D	LVR-IC	LDO, 5.2V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q52E	-	RP132S521E	LVR-IC	LDO, 5.2V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q52F	-	RP132S521F	LVR-IC	LDO, 5.2V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q53B	-	RP132S531B	LVR-IC	LDO, 5.3V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q53D	-	RP132S531D	LVR-IC	LDO, 5.3V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q53E	-	RP132S531E	LVR-IC	LDO, 5.3V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q53F	-	RP132S531F	LVR-IC	LDO, 5.3V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q54B	-	RP132S541B	LVR-IC	LDO, 5.4V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric
Q54D	-	RP132S541D	LVR-IC	LDO, 5.4V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q54E	-	RP132S541E	LVR-IC	LDO, 5.4V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q54F	-	RP132S541F	LVR-IC	LDO, 5.4V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q55B	-	RP132S551B	LVR-IC	LDO, 5.5V±1%, 1A, +CE	HSOP-6J	vtb	VR4	7e	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Q55D	-	RP132S551D	LVR-IC	LDO, 5.5V±1%, 1A, +CE, CL	HSOP-6J	vtb	VR4	7e	Ric
Q55E	-	RP132S551E	LVR-IC	LDO, 5.5V±1%, 1A, +CE	HSOP-6J	et	VR7	7e	Ric
Q55F	-	RP132S551F	LVR-IC	LDO, 5.5V±1%, 1A, +CE, CL	HSOP-6J	et	VR7	7e	Ric
Q6	-	R5210N005C	DC-DC-IC	PWM step-down, Vr=3.3V, DC/DCout=1.8V, Vdet= 4.2V	SOT-23-6W	dc1	-	7da	Ric
Q7	-	BAS70-09P	Si-diode	Dual, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-666	35de	-	7b	Ste
Q7	-	R5210N006C	DC-DC-IC	PWM step-down, Vr=3.3V, DC/DCout=1.8V, Vdet= 4V	SOT-23-6W	dc1	-	7da	Ric
Q8	-	R5210N007C	DC-DC-IC	PWM step-down, Vr=3.3V, DC/DCout=1.5V, Vdet= 4.2V	SOT-23-6W	dc1	-	7da	Ric
Q8B	-	S-1133B12-I8T1G	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8C	-	S-1133B13-I8T1G	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8D	-	S-1133B14-I8T1G	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8E	-	S-1133B15-I8T1G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8F	-	S-1133B16-I8T1G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8G	-	S-1133B17-I8T1G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8H	-	S-1133B18-I8T1G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8I	-	S-1133B19-I8T1G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8J	-	S-1133B20-I8T1G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8K	-	S-1133B21-I8T1G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8L	-	S-1133B22-I8T1G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8M	-	S-1133B23-I8T1G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8N	-	S-1133B24-I8T1G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8O	-	S-1133B25-I8T1G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8P	-	S-1133B26-I8T1G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8Q	-	S-1133B27-I8T1G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8R	-	S-1133B28-I8T1G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8S	-	S-1133B29-I8T1G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8T	-	S-1133B30-I8T1G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8U	-	S-1133B31-I8T1G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8V	-	S-1133B32-I8T1G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8W	-	S-1133B33-I8T1G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8X	-	S-1133B34-I8T1G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8Y	-	S-1133B35-I8T1G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q8Z	-	S-1133B36-I8T1G	LVR-IC	LDO, 3.6V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9	-	R5210N008C	DC-DC-IC	PWM step-down, Vr=3.3V, DC/DCout=1.5V, Vdet= 4V	SOT-23-6W	dc1	-	7da	Ric
Q9A	-	S-1133B37-I8T1G	LVR-IC	LDO, 3.7V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9B	-	S-1133B38-I8T1G	LVR-IC	LDO, 3.8V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9C	-	S-1133B39-I8T1G	LVR-IC	LDO, 3.9V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9D	-	S-1133B40-I8T1G	LVR-IC	LDO, 4.0V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9E	-	S-1133B41-I8T1G	LVR-IC	LDO, 4.1V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9F	-	S-1133B42-I8T1G	LVR-IC	LDO, 4.2V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9G	-	S-1133B43-I8T1G	LVR-IC	LDO, 4.3V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9H	-	S-1133B44-I8T1G	LVR-IC	LDO, 4.4V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9I	-	S-1133B45-I8T1G	LVR-IC	LDO, 4.5V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9J	-	S-1133B46-I8T1G	LVR-IC	LDO, 4.6V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9K	-	S-1133B47-I8T1G	LVR-IC	LDO, 4.7V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9L	-	S-1133B48-I8T1G	LVR-IC	LDO, 4.8V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9M	-	S-1133B49-I8T1G	LVR-IC	LDO, 4.9V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9N	-	S-1133B50-I8T1G	LVR-IC	LDO, 5.0V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9O	-	S-1133B51-I8T1G	LVR-IC	LDO, 5.1V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9P	-	S-1133B52-I8T1G	LVR-IC	LDO, 5.2V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9Q	-	S-1133B53-I8T1G	LVR-IC	LDO, 5.3V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9R	-	S-1133B54-I8T1G	LVR-IC	LDO, 5.4V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9S	-	S-1133B55-I8T1G	LVR-IC	LDO, 5.5V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9T	-	S-1133B56-I8T1G	LVR-IC	LDO, 5.6V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9U	-	S-1133B57-I8T1G	LVR-IC	LDO, 5.7V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9V	-	S-1133B58-I8T1G	LVR-IC	LDO, 5.8V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9W	-	S-1133B59-I8T1G	LVR-IC	LDO, 5.9V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
Q9X	-	S-1133B60-I8T1G	LVR-IC	LDO, 6.0V±1.0%, 300mA, +CE	SNT-8A	44eq	VR4	8a	Sii
QA	-	µPA673T	Si-npn	Dual, 40V, 200mA, 500MHz, 12/25ns	SC-95	33	T2	7b	Nec
QA	-	R5210N009C	DC-DC-IC	PWM step-down, Vr=2.5V, DC/DCout=1.8V, Vdet=3 V	SOT-23-6W	dc1	-	7da	Ric
QA	-	RP152N049A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1%, 150mA, +CE	SOT-23-6	x5	VR19	7da	Ric
QA	-	Si1903DL	p-MOSFET	Dual, V-MOS, LogL, 20V, ±0.41A, <1.8Ω(0.25A), <55/41ns	SOT-363	33	T14	7b	Six
QAGF	hc	MIC5320-1.8/1.5YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.5V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAGG	hc	MIC5320-1.8/1.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.8V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAGW	hc	MIC5320-1.8/1.6YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.6V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAJG	hc	MIC5320-2.5/1.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.8V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAJJ	hc	MIC5320-2.5/2.5YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.5V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAKD	hc	MIC5320-2.6/1.85YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/1.85±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAKG	hc	MIC5320-2.6/1.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/1.8V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QALL	hc	MIC5320-2.7/2.7YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.7V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAMF	hc	MIC5320-2.8/1.5YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
QAMG	hc	MIC5320-2.8/1.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAMK	hc	MIC5320-2.8/2.6YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.6V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAMM	hc	MIC5320-2.8/2.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAND	hc	MIC5320-2.85/1.85YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.85V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QANK	hc	MIC5320-2.85/2.6YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.6V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QANN	hc	MIC5320-2.85/2.85YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.85V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAOF	hc	MIC5320-2.9/1.5YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/1.5V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAOG	hc	MIC5320-2.9/1.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/1.8V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAOO	hc	MIC5320-2.9/2.9YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/2.9V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAPG	hc	MIC5320-3.0/1.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.8V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAPJ	hc	MIC5320-3.0/2.5YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.5V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAPK	hc	MIC5320-3.0/2.6YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.6V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAPM	hc	MIC5320-3.0/2.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.8V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAPN	hc	MIC5320-3.0/2.85YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.85V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QAPP	hc	MIC5320-3.0/3.0YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QASF	hc	MIC5320-3.3/1.5YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.5V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QASG	hc	MIC5320-3.3/1.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QASJ	hc	MIC5320-3.3/2.5YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.5V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QASK	hc	MIC5320-3.3/2.6YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.6V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QASL	hc	MIC5320-3.3/2.7YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.7V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QASM	hc	MIC5320-3.3/2.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QASN	hc	MIC5320-3.3/2.85YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.85V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QASO	hc	MIC5320-3.3/2.9YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.9V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QASP	hc	MIC5320-3.3/3.0YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.0V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QASR	hc	MIC5320-3.3/3.2YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.2V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QASS	hc	MIC5320-3.3/3.3YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QB	-	R5210N010C	DC-DC-IC	PWM step-down, Vr=2.5V, DC/DCout=1.5V, Vdet= 3V	SOT-23-6W	dc1	-	7da	Ric
QB	-	Si1905DL	p-MOSFET	Dual, V-MOS, LogL, 8V, ±0.57A, <1.2Ω(0.2A), <62/40ns	SOT-363	33	T14	7b	Six
QBGF	hc	MIC5321-1.8/1.5YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.5V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBGG	hc	MIC5321-1.8/1.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.8V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBGW	hc	MIC5321-1.8/1.6YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.6V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBJG	hc	MIC5321-2.5/1.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.8V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBJJ	hc	MIC5321-2.5/2.5YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.5V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBKD	hc	MIC5321-2.6/1.85YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/1.85±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBKG	hc	MIC5321-2.6/1.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/1.8V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBLL	hc	MIC5321-2.7/2.7YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.7V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBMF	hc	MIC5321-2.8/1.5YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBMG	hc	MIC5321-2.8/1.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBMK	hc	MIC5321-2.8/2.6YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.6V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBMM	hc	MIC5321-2.8/2.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBND	hc	MIC5321-2.85/1.85YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.85V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBNK	hc	MIC5321-2.85/2.6YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.6V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBNN	hc	MIC5321-2.85/2.85YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.85V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBOF	hc	MIC5321-2.9/1.5YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/1.5V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBOG	hc	MIC5321-2.9/1.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/1.8V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBOO	hc	MIC5321-2.9/2.9YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/2.9V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBPG	hc	MIC5321-3.0/1.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.8V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBPJ	hc	MIC5321-3.0/2.5YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.5V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBPK	hc	MIC5321-3.0/2.6YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.6V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBPM	hc	MIC5321-3.0/2.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.8V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBPN	hc	MIC5321-3.0/2.85YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.85V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBPP	hc	MIC5321-3.0/3.0YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBSF	hc	MIC5321-3.3/1.5YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.5V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBSG	hc	MIC5321-3.3/1.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBSJ	hc	MIC5321-3.3/2.5YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.5V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBSK	hc	MIC5321-3.3/2.6YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.6V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBSL	hc	MIC5321-3.3/2.7YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.7V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBSM	hc	MIC5321-3.3/2.8YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBSN	hc	MIC5321-3.3/2.85YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.85V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBSO	hc	MIC5321-3.3/2.9YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.9V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBSP	hc	MIC5321-3.3/3.0YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.0V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBSR	hc	MIC5321-3.3/3.2YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.2V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QBSS	hc	MIC5321-3.3/3.3YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±2%, 150mA, +CE	TSOT-23-6	33g1	VR31	7b	Mcr
QC	-	R5210N012C	DC-DC-IC	PWM step-down, Vr=2.5V, DC/DCout=3.3V, Vdet= 3.7V	SOT-23-6W	dc1	-	7da	Ric
QC	-	Si1907DL	p-MOSFET	Dual, V-MOS, LogL, 12V, ±0.53A, <1.31Ω(0.2A), <52/40ns	SOT-363	33	T14	7b	Six
QH4F	hc	MIC5320-2.4/1.5YD6	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V/1.5V±2%, 150mA, +CE	TSOT-23-6	33e0	VR19	7b	Mcr
QLA	-	S-1132B15-I6T2G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLB	-	S-1132B16-I6T2G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLC	-	S-1132B17-I6T2G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLD	-	S-1132B18-I6T2G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
QLE	-	S-1132B19-I6T2G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLF	-	S-1132B20-I6T2G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLG	-	S-1132B21-I6T2G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLH	-	S-1132B22-I6T2G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLI	-	S-1132B23-I6T2G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLJ	-	S-1132B24-I6T2G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLK	-	S-1132B25-I6T2G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLL	-	S-1132B26-I6T2G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLM	-	S-1132B27-I6T2G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLN	-	S-1132B28-I6T2G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLO	-	S-1132B29-I6T2G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLP	-	S-1132B30-I6T2G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLQ	-	S-1132B31-I6T2G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLR	-	S-1132B32-I6T2G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLS	-	S-1132B33-I6T2G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLT	-	S-1132B34-I6T2G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLU	-	S-1132B35-I6T2G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLV	-	S-1132B36-I6T2G	LVR-IC	LDO, 3.6V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLW	-	S-1132B37-I6T2G	LVR-IC	LDO, 3.7V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLX	-	S-1132B38-I6T2G	LVR-IC	LDO, 3.8V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLY	-	S-1132B39-I6T2G	LVR-IC	LDO, 3.9V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QLZ	-	S-1132B40-I6T2G	LVR-IC	LDO, 4.0V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QMA	-	S-1132B41-I6T2G	LVR-IC	LDO, 4.1V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QMB	-	S-1132B42-I6T2G	LVR-IC	LDO, 4.2V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QMC	-	S-1132B43-I6T2G	LVR-IC	LDO, 4.3V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QMD	-	S-1132B44-I6T2G	LVR-IC	LDO, 4.4V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QME	-	S-1132B45-I6T2G	LVR-IC	LDO, 4.5V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QMF	-	S-1132B46-I6T2G	LVR-IC	LDO, 4.6V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QMG	-	S-1132B47-I6T2G	LVR-IC	LDO, 4.7V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QMH	-	S-1132B48-I6T2G	LVR-IC	LDO, 4.8V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QMI	-	S-1132B49-I6T2G	LVR-IC	LDO, 4.9V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QMJ	-	S-1132B50-I6T2G	LVR-IC	LDO, 5.0V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QMK	-	S-1132B51-I6T2G	LVR-IC	LDO, 5.1V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QML	-	S-1132B52-I6T2G	LVR-IC	LDO, 5.2V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QMM	-	S-1132B53-I6T2G	LVR-IC	LDO, 5.3V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QMN	-	S-1132B54-I6T2G	LVR-IC	LDO, 5.4V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QMO	-	S-1132B55-I6T2G	LVR-IC	LDO, 5.5V±1.0%, 300mA, +CE	SNT-6A	35vtb	VR4	7g	Sii
QQA	-	S-1711A2831-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QQB	-	S-1711A3128-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QQC	-	S-1711A2J33-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QQD	-	S-1711A1518-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QQF	-	S-1711A2J15-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QQG	-	S-1711A2J18-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QQI	-	S-1711A152J-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QR2	-	S-1711A2829-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QR2	-	S-1711A2829-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QR3	-	S-1711A3333-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QR3	-	S-1711A3333-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QR4	-	S-1711A1825-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QR5	-	S-1711A1828-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QR5	-	S-1711A1828-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QR6	-	S-1711A3330-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QR7	-	S-1711A1833-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QR7	-	S-1711A1833-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QR8	-	S-1711A5030-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/3.0V±1.0%, 150mA, +CE, CL	SNT-6A	35rg	VR19	7g	Sii
QR9	-	S-1711A2529-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRA	-	S-1711A1515-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRA	-	S-1711A1515-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRB	-	S-1711A2828-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRB	-	S-1711A2828-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRD	-	S-1711A2830-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRD	-	S-1711A2830-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRE	-	S-1711A2518-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRE	-	S-1711A2518-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRF	-	S-1711A2832-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRF	-	S-1711A2832-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRG	-	S-1711A2833-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRG	-	S-1711A2833-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRH	-	S-1711A2J2J-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRH	-	S-1711A2J2J-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
QRJ	-	S-1711A2929-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRJ	-	S-1711A2929-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRK	-	S-1711A3030-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRK	-	S-1711A3030-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRL	-	S-1711A2515-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRL	-	S-1711A2515-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRM	-	S-1711A3025-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRM	-	S-1711A3025-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRN	-	S-1711A3033-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRN	-	S-1711A3033-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRP	-	S-1711A1827-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRP	-	S-1711A1827-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRQ	-	S-1711A182H-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.75V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRQ	-	S-1711A182H-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.75V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRR	-	S-1711A2424-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRR	-	S-1711A2424-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRS	-	S-1711A2425-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRS	-	S-1711A2425-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRT	-	S-1711A2525-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2..5V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRT	-	S-1711A2525-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRU	-	S-1711A2815-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRU	-	S-1711A2815-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRV	-	S-1711A2818-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRV	-	S-1711A2818-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRW	-	S-1711A3018-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1..8V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRW	-	S-1711A3018-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRX	-	S-1711A3015-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.9V/1.5V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRX	-	S-1711A3015-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRY	-	S-1711A1815-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRY	-	S-1711A1815-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QRZ	-	S-1711A1J28-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.8V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QRZ	-	S-1711A1J28-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QS2	-	S-1711C1825-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSA	-	S-1711C1515-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSA	-	S-1711C1515-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSB	-	S-1711C1815-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSB	-	S-1711C1815-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSC	-	S-1711C1827-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSC	-	S-1711C1827-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSD	-	S-1711C182H-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.75V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSD	-	S-1711C182H-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.75V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSE	-	S-1711C1J28-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSE	-	S-1711C1J28-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.8V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSF	-	S-1711C2424-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSF	-	S-1711C2424-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSG	-	S-1711C2425-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSG	-	S-1711C2425-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSH	-	S-1711C2515-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSH	-	S-1711C2515-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSI	-	S-1711C2518-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSI	-	S-1711C2518-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSJ	-	S-1711C2525-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSJ	-	S-1711C2525-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSK	-	S-1711C2815-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSK	-	S-1711C2815-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSL	-	S-1711C2818-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSL	-	S-1711C2818-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSM	-	S-1711C2828-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSM	-	S-1711C2828-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSN	-	S-1711C2829-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSN	-	S-1711C2829-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSO	-	S-1711C2830-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSO	-	S-1711C2830-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSP	-	S-1711C2833-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSP	-	S-1711C2833-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSQ	-	S-1711C2J2J-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSQ	-	S-1711C2J2J-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSR	-	S-1711C2929-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSR	-	S-1711C2929-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSS	-	S-1711C3015-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
QSS	-	S-1711C3015-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QST	-	S-1711C3018-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7d	Sii
QST	-	S-1711C3018-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSU	-	S-1711C3025-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSU	-	S-1711C3025-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSV	-	S-1711C3030-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSV	-	S-1711C3030-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSW	-	S-1711C3033-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QSW	-	S-1711C3033-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSX	-	S-1711C1832-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSY	-	S-1711C3131-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1.0%, 150mA, +CE, PDR	SOT-23-6	33rg	VR19	7d	Sii
QSZ	-	S-1711C1828-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35rg	VR19	7g	Sii
QTA	-	S-1711E2818-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 150mA, -CE, CL, PUR	SNT-6A	35rg	VR19	7g	Sii
QTA	-	S-1711E2818-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 150mA, -CE, CL, PUR	SOT-23-6	33rg	VR19	7d	Sii
QTB	-	S-1711E3333-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1.0%, 150mA, -CE, CL, PUR	SOT-23-6	33rg	VR19	7d	Sii
QTC	-	S-1711E1833-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.0%, 150mA, -CE, CL, PUR	SOT-23-6	33rg	VR19	7d	Sii
QTF	-	S-1711F2818-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 150mA, -CE, CL	SNT-6A	35rg	VR19	7g	Sii
QTK	-	S-1711G2830-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1.0%, 150mA, -CE, PUR	SNT-6A	35rg	VR19	7g	Sii
QTP	-	S-1711H2518-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1.0%, 150mA, -CE	SOT-23-6	33rg	VR19	7d	Sii
QUA	-	S-1711B2518-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1.0%, 150mA, +CE, CL	SNT-6A	35rg	VR19	7g	Sii
QUA	-	S-1711B2518-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QUB	-	S-1711B1828-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, +CE, CL	SNT-6A	35rg	VR19	7g	Sii
QUB	-	S-1711B1828-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QUC	-	S-1711B2528-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1.0%, 150mA, +CE, CL	SNT-6A	35rg	VR19	7g	Sii
QUC	-	S-1711B2528-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QUD	-	S-1711B2815-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1.0%, 150mA, +CE, CL	SNT-6A	35rg	VR19	7g	Sii
QUD	-	S-1711B2815-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QUE	-	S-1711B2818-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 150mA, +CE, CL	SNT-6A	35rg	VR19	7g	Sii
QUE	-	S-1711B2818-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QUF	-	S-1711B2828-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 150mA, +CE, CL	SNT-6A	35rg	VR19	7g	Sii
QUF	-	S-1711B2828-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QUG	-	S-1711B2515-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QUH	-	S-1711B1518-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±1.0%, 150mA, +CE, CL	SNT-6A	35rg	VR19	7g	Sii
QUH	-	S-1711B1518-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QUI	-	S-1711B1529-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QUJ	-	S-1711B1833-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.0%, 150mA, +CE, CL	SNT-6A	35rg	VR19	7g	Sii
QUJ	-	S-1711B1833-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QUK	-	S-1711B1825-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1.0%, 150mA, +CE, CL	SNT-6A	35rg	VR19	7g	Sii
QUK	-	S-1711B1825-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QUL	-	S-1711B2825-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QUM	-	S-1711B1832-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QUN	-	S-1711D1828-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, +CE	SNT-6A	35rg	VR19	7g	Sii
QUN	-	S-1711D1828-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, +CE	SOT-23-6	33rg	VR19	7d	Sii
QUO	-	S-1711D2518-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1.0%, 150mA, +CE	SNT-6A	35rg	VR19	7g	Sii
QUO	-	S-1711D2518-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1.0%, 150mA, +CE	SOT-23-6	33rg	VR19	7d	Sii
QUP	-	S-1711D2528-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1.0%, 150mA, +CE	SNT-6A	35rg	VR19	7g	Sii
QUP	-	S-1711D2528-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1.0%, 150mA, +CE	SOT-23-6	33rg	VR19	7d	Sii
QUQ	-	S-1711D2815-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1.0%, 150mA, +CE	SNT-6A	35rg	VR19	7g	Sii
QUQ	-	S-1711D2815-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1.0%, 150mA, +CE	SOT-23-6	33rg	VR19	7d	Sii
QUR	-	S-1711D1925-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±1.0%, 150mA, +CE	SNT-6A	35rg	VR19	7g	Sii
QUR	-	S-1711D1925-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±1.0%, 150mA, +CE	SOT-23-6	33rg	VR19	7d	Sii
QUS	-	S-1711D1825-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1.0%, 150mA, +CE	SOT-23-6	33rg	VR19	7d	Sii
QUT	-	S-1711D1832-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±1.0%, 150mA, +CE	SOT-23-6	33rg	VR19	7d	Sii
QUU	-	S-1711D2J2J-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, +CE	SNT-6A	35rg	VR19	7g	Sii
QUV	-	S-1711D4230-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=4.2V/3.0V±1.0%, 150mA, +CE	SOT-23-6	33rg	VR19	7d	Sii
QUW	-	S-1711D1826-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1.0%, 150mA, +CE	SOT-23-6	33rg	VR19	7d	Sii
QUX	-	S-1711D2629-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±1.0%, 150mA, +CE	SOT-23-6	33rg	VR19	7d	Sii
QUY	-	S-1711D252J-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±1.0%, 150mA, +CE	SNT-6A	35rg	VR19	7g	Sii
QV2	-	S-1711A3350-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/5.0V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QV3	-	S-1711A5025-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.5V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QV3	-	S-1711A5025-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=5.0V/2.5V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QV4	-	S-1711A2618-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QV5	-	S-1711A2718-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QV6	-	S-1711A3434-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QV7	-	S-1711A2628-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QV8	-	S-1711A2629-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QV9	-	S-1711A2630-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QVA	-	S-1711A3325-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVB	-	S-1711A3328-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVC	-	S-1711A2825-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
QVD	-	S-1711A2528-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QVD	-	S-1711A2528-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVE	-	S-1711A2533-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QVE	-	S-1711A2533-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVF	-	S-1711A1818-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QVF	-	S-1711A1818-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVG	-	S-1711A2045-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/4.5V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVH	-	S-1711A1830-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QVH	-	S-1711A1830-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVI	-	S-1711A1528-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QVI	-	S-1711A1528-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVJ	-	S-1711A3348-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.8V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QVJ	-	S-1711A3348-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/4.8V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVK	-	S-1711A1529-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVL	-	S-1711A1829-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QVL	-	S-1711A1829-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVM	-	S-1711A2626-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QVN	-	S-1711A1832-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVO	-	S-1711A2522-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVP	-	S-1711A2819-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVQ	-	S-1711A4020-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=4.0V/2.0V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVR	-	S-1711A3318-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QVS	-	S-1711A182J-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QVS	-	S-1711A182J-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVT	-	S-1711A1526-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QVU	-	S-1711A2332-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QVV	-	S-1711A2333-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QVW	-	S-1711A1533-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QVW	-	S-1711A1533-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVX	-	S-1711A2J30-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVY	-	S-1711A2933-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±1.0%, 150mA, +CE, CL, PDR	SOT-23-6	33rg	VR19	7d	Sii
QVZ	-	S-1711A3028-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1.0%, 150mA, +CE, CL, PDR	SNT-6A	35rg	VR19	7g	Sii
QZA	-	S-1711B3033-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±1.0%, 150mA, +CE, CL	SNT-6A	35rg	VR19	7g	Sii
QZA	-	S-1711B3033-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QZB	-	S-1711B3333-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1.0%, 150mA, +CE, CL	SNT-6A	35rg	VR19	7g	Sii
QZB	-	S-1711B3333-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QZC	-	S-1711B1528-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1.0%, 150mA, +CE, CL	SNT-6A	35rg	VR19	7g	Sii
QZD	-	S-1711B2833-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 150mA, +CE, CL	SNT-6A	35rg	VR19	7g	Sii
QZF	-	S-1711B3036-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QZG	-	S-1711B2618-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QZH	-	S-1711B2718-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
QZI	-	S-1711B3030-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1.0%, 150mA, +CE, CL	SOT-23-6	33rg	VR19	7d	Sii
R0	-	R5426D111EA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.11V	SON-6	xk	VBM1	7g	Ric
R0	-	R5426N111EA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.11V	SOT-23-6	xk	VBM1	7da	Ric
R1	-	R5426D105BB	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.04V	SON-6	xk	VBM1	7g	Ric
R1	-	R5426N105BB	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.05V	SOT-23-6	xk	VBM1	7da	Ric
R15	-	TK11215CM	LVR-IC	LDO, 1.5V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R16	-	TK11216CM	LVR-IC	LDO, 1.6V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R17	-	TK11217CM	LVR-IC	LDO, 1.7V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R18	-	TK11218CM	LVR-IC	LDO, 1.8V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R19	-	TK11219CM	LVR-IC	LDO, 1.9V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R2	-	R5426D124CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.24V	SON-6	xk	VBM1	7g	Ric
R2	-	R5426N124CA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.24V	SOT-23-6	xk	VBM1	7da	Ric
R2	-	TK11420M	LVR-IC	LDO, 2.0V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok
R2	ha	TK11425M	LVR-IC	LDO, 2.5V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok
R20	-	TK11220CM	LVR-IC	LDO, 2.0V±5%, 150mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R21	-	TK11221CM	LVR-IC	LDO, 2.1V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R22	-	TK11222CM	LVR-IC	LDO, 2.2V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R23	-	TK11223CM	LVR-IC	LDO, 2.3V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R24	-	TK11224CM	LVR-IC	LDO, 2.4V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R25	-	TK11225CM	LVR-IC	LDO, 2.5V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R26	-	TK11226CM	LVR-IC	LDO, 2.6V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R27	-	TK11227CM	LVR-IC	LDO, 2.7V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R28	-	TK11228CM	LVR-IC	LDO, 2.8V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R29	-	TK11229CM	LVR-IC	LDO, 2.9V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R3	-	R5426D105DF	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.05V	SON-6	xk	VBM1	7g	Ric
R3	-	R5426N105DF	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.05V	SOT-23-6	xk	VBM1	7da	Ric
R3	-	TK11430M	LVR-IC	LDO, 3.0V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok
R3	hf	TK11431M	LVR-IC	LDO, 3.1V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok
R3	hb	TK11432M	LVR-IC	LDO, 3.25V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R3	ha	TK11435M	LVR-IC	LDO, 3.5V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok
R3	he	TK11437M	LVR-IC	LDO, 3.76V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok
R30	-	TK11230CM	LVR-IC	LDO, 3.0V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R31	-	TK11231CM	LVR-IC	LDO, 3.1V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R32	-	TK11232CM	LVR-IC	LDO, 3.2V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R33	-	TK11233CM	LVR-IC	LDO, 3.3V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R34	-	µPA802T-FB	Si-npn	Dual, VHF/UHF, 20V, 65mA, 150mW, 7GHz, B=70..140	SOT-363	33	T2	7b	Nec
R34	-	TK11234CM	LVR-IC	LDO, 3.4V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R35	-	µPA802T-GB	Si-npn	Dual, VHF/UHF, 20V, 65mA, 150mW, 7GHz, B=110..240	SOT-363	33	T2	7b	Nec
R35	-	TK11235CM	LVR-IC	LDO, 3.5V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R36	-	TK11236CM	LVR-IC	LDO, 3.6V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R37	-	TK11237CM	LVR-IC	LDO, 3.7V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R38	-	TK11238CM	LVR-IC	LDO, 3.8V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R39	-	TK11239CM	LVR-IC	LDO, 3.9V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R4	-	R5426D106DA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.06V	SON-6	xk	VBM1	7g	Ric
R4	-	R5426N106DA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.06V	SOT-23-6	xk	VBM1	7da	Ric
R4	-	TK11440M	LVR-IC	LDO, 4.0V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok
R4	ha	TK11445M	LVR-IC	LDO, 4.5V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok
R4	he	TK11447M	LVR-IC	LDO, 4.76V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok
R4	hb	TK11448M	LVR-IC	LDO, 4.8V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok
R40	-	TK11240CM	LVR-IC	LDO, 4.0V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R41	-	TK11241CM	LVR-IC	LDO, 4.1V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R42	-	TK11242CM	LVR-IC	LDO, 4.2V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R43	-	TK11243CM	LVR-IC	LDO, 4.3V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R44	-	TK11244CM	LVR-IC	LDO, 4.4V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R45	-	TK11245CM	LVR-IC	LDO, 4.5V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R46	-	TK11246CM	LVR-IC	LDO, 4.6V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R47	-	TK11247CM	LVR-IC	LDO, 4.7V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R48	-	TK11248CM	LVR-IC	LDO, 4.8V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R49	-	TK11249CM	LVR-IC	LDO, 4.9V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R5	-	R5426D111DG	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.11V	SON-6	xk	VBM1	7g	Ric
R5	-	R5426N111DG	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.11V	SOT-23-6	xk	VBM1	7da	Ric
R5	-	TK11450M	LVR-IC	LDO, 5.0V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok
R5	ha	TK11455M	LVR-IC	LDO, 5.5V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok
R5	he	TK11457M	LVR-IC	LDO, 5.75V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok
R50	-	TK11250CM	LVR-IC	LDO, 5.0V±5%, 170mA, +CE	SOT-23L-6	33vf	VR7	7b	Tok
R6	-	R5426D125BB	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.25V	SON-6	xk	VBM1	7g	Ric
R6	-	R5426N125BB	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.25V	SOT-23-6	xk	VBM1	7da	Ric
R6	-	TK11460CM	LVR-IC	LDO, 6.0V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok
R7	-	R5426D126FA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.26V	SON-6	xk	VBM1	7g	Ric
R7	-	R5426N126FA	BM-IC	Li-Ion, over-charge/discharge protection, Vc/d=1.26V	SOT-23-6	xk	VBM1	7da	Ric
R7A	-	S-8211CBA-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
R7B	-	S-8211CBB-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.30V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
R7D	-	S-8211CBD-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
R7N	-	S-8211CBN-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.225V, Tcy=573ms	SNT-6A	35bm1	VBM1	7g	Sii
R7O	-	S-8211CBO-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.270V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
R7R	-	S-8211CBR-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
R8	-	R1131D081D	LVR-IC	LDO, 0.8V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
R8	-	TK11480CM	LVR-IC	LDO, 8V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok
R8	he	TK11487CM	LVR-IC	LDO, 8.75V±1.5%, 110mA, +CE	SOT-23L-6	33hp	VR4	7b	Tok
R81	-	µPA821TF	Si-npn	Dual, VHF/UHF, LN, 20V, 100mA, 200mW, B=70..140, 4.5GHz	SOT-363	33	T3	7b	Nec
R84	-	µPA827TF	Si-npn	Dual, VHF/UHF, LN, 5V, 10mA, 30mW, B=70..140, 13GHz	SOT-363	33	T3	7b	Nec
R86	-	µPA828TF	Si-npn	Dual, VHF/UHF, LN, 5V, 30mA, 90mW, B=70..140, 11GHz	SOT-363	33	T3	7b	Nec
R9	-	R1131D091D	LVR-IC	LDO, 0.9V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
RA	-	RP152N049B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
RA	-	Si1553DL	n/p-MOSFET	Dual, V-MOS, LogL, 20V, N: 1.3A, <0.63Ω, P: 0.82A, <1.8Ω	SOT-363	33	T6	7b	Six
RA	-	XC6602B051MR-G	LVR-IC	LDO, 0.5V±15mV, 1A, +CE	SOT-26W	zk	VR11	7d	Tor
RB	-	Si1555DL	n/p-MOSFET	Dual, V-MOS, LogL, 20V, N: 1.3A, <0.63Ω, P: ±1.2A, <1.2Ω	SOT-363	33	T6	7b	Six
RB	-	XC6602B061MR-G	LVR-IC	LDO, 0.6V±15mV, 1A, +CE	SOT-26W	zk	VR11	7d	Tor
RC	-	XC6602B071MR-G	LVR-IC	LDO, 0.7V±15mV, 1A, +CE	SOT-26W	zk	VR11	7d	Tor
RD	-	XC6602B081MR-G	LVR-IC	LDO, 0.8V±15mV, 1A, +CE	SOT-26W	zk	VR11	7d	Tor
RE	-	XC6602B091MR-G	LVR-IC	LDO, 0.9V±15mV, 1A, +CE	SOT-26W	zk	VR11	7d	Tor
REs	-	BFS480	Si-npn	Dual, UHF, 10V, 10mA, >5GHz	SOT-363	33	T26	7b	Sie
RF	-	XC6602B101MR-G	LVR-IC	LDO, 1.0V±15mV, 1A, +CE	SOT-26W	zk	VR11	7d	Tor
RFs	-	BFS481	Si-npn	Dual, UHF, 20V, 20mA, >6GHz	SOT-363	33	T26	7b	Sie
RGs	-	BFS482	Si-npn	Dual, UHF, 20V, 35mA, >6GHz	SOT-363	33	T26	7b	Sie
RH	-	XC6602B111MR-G	LVR-IC	LDO, 1.1V±15mV, 1A, +CE	SOT-26W	zk	VR11	7d	Tor
RHs	-	BFS483	Si-npn	Dual, UHF, 20V, 65mA, >6GHz	SOT-363	33	T26	7b	Sie
RK	-	XC6602B121MR-G	LVR-IC	LDO, 1.2V±20mV, 1A, +CE	SOT-26W	zk	VR11	7d	Tor
RL	-	µPA800T-KB	Si-npn	Dual, VHF/UHF, 20V, 35mA, 150mW, 8.5GHz, B=80..200	SOT-363	33	T2	7b	Nec

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RL	-	XC6602B131MR-G	LVR-IC	LDO, 1.3V±20mV, 1A, +CE	SOT-26W	zk	VR11	7d	Tor
RM	-	XC6602B141MR-G	LVR-IC	LDO, 1.4V±20mV, 1A, +CE	SOT-26W	zk	VR11	7d	Tor
RN	-	XC6602B151MR-G	LVR-IC	LDO, 1.5V±20mV, 1A, +CE	SOT-26W	zk	VR11	7d	Tor
RP	-	DDZX33TS	Z-diode	Triple, 33V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
RP	-	XC6602B161MR-G	LVR-IC	LDO, 1.6V±20mV, 1A, +CE	SOT-26W	zk	VR11	7d	Tor
RR	-	XC6602B171MR-G	LVR-IC	LDO, 1.7V±20mV, 1A, +CE	SOT-26W	zk	VR11	7d	Tor
RS	-	XC6602B181MR-G	LVR-IC	LDO, 1.8V±20mV, 1A, +CE	SOT-26W	zk	VR11	7d	Tor
RZ5A	-	S-8211CAS-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZA	-	S-8211CAA-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZB	-	S-8211CAB-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.325V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZD	-	S-8211CAD-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.350V, Tcy=143ms	SNT-6A	35bm1	VBM1	7g	Sii
RZE	-	S-8211CAE-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZF	-	S-8211CAF-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZH	-	S-8211CAH-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZI	-	S-8211CAI-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZJ	-	S-8211CAJ-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZK	-	S-8211CAK-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZL	-	S-8211CAL-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZM	-	S-8211CAM-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZN	-	S-8211CAN-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.20V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZO	-	S-8211CAO-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZP	-	S-8211CAP-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZQ	-	S-8211CAQ-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZR	-	S-8211CAR-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZT	-	S-8211CAT-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZU	-	S-8211CAU-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZV	-	S-8211CAV-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.325V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZW	-	S-8211CAW-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZX	-	S-8211CAX-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.275V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
RZY	-	S-8211CAY-I6T1G	BM-IC	1-cell Li-Ion overcharge prot, Ucu=4.280V, Tcy=1.2s	SNT-6A	35bm1	VBM1	7g	Sii
S0	-	R1131D101D	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
S0	-	R1225N552C	DC-DC-IC	PWM step-down, 5.5V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
S00C	-	R1511S001C	LVR-IC	LDO, Adjustable 3..12VV±1%, 300mA	HSOP-6J	x8	VR5	7h	Ric
S03A	-	LM2664M6	Lin-IC	Switched Capacitor Voltage Converter 1.8..5.5V, 40mA	SOT-23-6	33uf	-	7b	Nsc
S04A	-	LM2665M6	Lin-IC	Switched Capacitor Voltage Converter 2.5..5.5V, 40mA	SOT-23-6	33vh	-	7b	Nsc
S0C	-	SGM2122-AYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7c	Sgm
S0D	-	SGM2122-CYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7c	Sgm
S0E	-	SGM2122-DYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7c	Sgm
S0F	-	SGM2122-EYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7d	Sgm
S1	-	R1131D111D	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
S1	-	R1225N602C	DC-DC-IC	PWM step-down, 6V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
S10	-	SGM2122-GYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7c	Sgm
S10A	-	LM2681M6	Lin-IC	Switched Capacitor Voltage Converter 2.5..5.5V, 20mA	SOT-23-6	33vcd	-	7b	Nsc
S11	-	SGM2122-HYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7d	Sgm
S12	-	SGM2122-IYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7c	Sgm
S13	-	SGM2122-KYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7c	Sgm
S14	-	SGM2122-MYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7d	Sgm
S15	-	SGM2122-NYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7c	Sgm
S16	-	SGM2122-OYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7d	Sgm
S17	-	SGM2122-PYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7c	Sgm
S18	-	SGM2122-QYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7d	Sgm
S19	-	SGM2122-RYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7d	Sgm
s1A	-	SMBT3904S	Si-npn	Dual, GP, 60V, 100mA, 200mW, B= 100..300, >300MHz	SOT-363	33	T8	7b	Sie
S1A	-	SGM2122-SYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7d	Sgm
S1B	-	SGM2122-TYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V 3.3V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7c	Sgm
S1C	-	SGM2122-UYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V 3.0V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7c	Sgm
S1D	-	SGM2122-VYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V 3.3V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7c	Sgm
S1E	-	SGM2122-WYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7d	Sgm
S2	-	R1131D121D	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
S2	-	R1225N122D	DC-DC-IC	PWM step-down, 1.2V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
S22	-	S-1721A1833-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S22	-	S-1721A1833-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S23	-	S-1721A1830-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S23	-	S-1721A1830-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S24	-	S-1721A1328-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S26	-	S-1721A3018-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S27	-	S-1721A1826-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S28	-	S-1721A2826-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S28	-	SGM2122-XYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V 2.8V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7c	Sgm
S29	-	S-1721A3312-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S29	-	SGM2122-YYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7d	Sgm
s2A	-	SMBT3906S	Si-pnp	Dual, GP, 40V, 200mA, 330mW, B=100..300, >250MHz	SOT-363	33	T10	7b	Sie
S2A	-	S-1721A2828-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2A	-	S-1721A2828-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S2B	-	S-1721A1212-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2B	-	S-1721A1212-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S2C	-	S-1721A2020-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2C	-	S-1721A2020-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S2D	-	S-1721A1215-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2D	-	S-1721A1215-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S2E	-	S-1721A1330-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S2F	-	S-1721A1825-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2F	-	S-1721A1825-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S2G	-	S-1721A1828-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2G	-	S-1721A1828-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S2H	-	S-1721A2815-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2H	-	S-1721A2815-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S2I	-	S-1721A2818-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2I	-	S-1721A2818-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S2J	-	S-1721A2J2J-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2J	-	S-1721A2J2J-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S2K	-	S-1721A3030-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2L	-	S-1721A3119-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2M	-	S-1721A3318-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2M	-	S-1721A3318-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S2N	-	S-1721A1233-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2N	-	S-1721A1233-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S2O	-	S-1721A3333-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2O	-	S-1721A3333-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S2P	-	S-1721A1513-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2P02	-	MMSF2P02E	p-MOSFET	V-MOS, LogL, 20V, 2.5A, 2.5W, <0.25Ω(5A)	SOP-8	47fr	-	8d	Mot
S2Q	-	S-1721A1515-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2R	-	S-1721A2121-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2S	-	S-1721A1218-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2T	-	S-1721A1812-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2U	-	S-1721A182J-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2V	-	S-1721A2J18-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2W	-	S-1721A1C18-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.25V/1.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2X	-	S-1721A1818-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2Y	-	S-1721A1528-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S2Z	-	S-1721A2518-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S2Z	-	S-1721A2518-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S3	-	R1131D131D	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
S3	-	R1225N152D	DC-DC-IC	PWM step-down, 1.5V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
S30B	-	R1511S030B	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S31B	-	R1511S031B	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S32B	-	R1511S032B	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S33B	-	R1511S033B	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S34B	-	R1511S034B	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S35	-	SGM2027-PYTN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 250mA, +CE	TSOT-23-6L	33x5	VR19	7d	Sgm
S35B	-	R1511S035B	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S36B	-	R1511S036B	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S37B	-	R1511S037B	LVR-IC	LDO, 3.7V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S38B	-	R1511S038B	LVR-IC	LDO, 3.8V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S39B	-	R1511S039B	LVR-IC	LDO, 3.9V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S3A	-	S-1721B1515-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1.0%, 150mA, ±CE, PDR, PUR	SNT-6A	35xv	VR19	7g	Sii
S3B	-	S-1721B1518-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±1.0%, 150mA, ±CE, PDR, PUR	SNT-6A	35xv	VR19	7g	Sii
S3B	-	SGM2027-VYTN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 250mA, +CE	TSOT-23-6L	33x5	VR19	7d	Sgm
S3C	-	S-1721B1812-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±1.0%, 150mA, ±CE, PDR, PUR	SNT-6A	35xv	VR19	7g	Sii
S3C	-	SGM2027-WYTN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 250mA, +CE	TSOT-23-6L	33x5	VR19	7d	Sgm
S3D	-	S-1721B1818-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1.0%, 150mA, ±CE, PDR, PUR	SNT-6A	35xv	VR19	7g	Sii
S3E	-	S-1721B2818-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 150mA, ±CE, PDR, PUR	SNT-6A	35xv	VR19	7g	Sii
S3E	-	SGM2027-YYTN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 250mA, +CE	TSOT-23-6L	33x5	VR19	7d	Sgm
S3F	-	S-1721B2J2J-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, ±CE, PDR, PUR	SNT-6A	35xv	VR19	7g	Sii
S3G	-	S-1721B2828-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 150mA, ±CE, PDR, PUR	SOT-23-6	33x5	VR19	7d	Sii
S3P02	-	MMSF3P02HD	p-MOSFET	V-MOS, LogL, 20V, 5.6A, 2.5W, <75mΩ(5A)	SOP-8	47fr	-	8d	Mot
S3P02Z	-	MMSF3P02Z	p-MOSFET	V-MOS, LogL, 20V, 6.5A, 2.5W, <60mΩ(5A)	SOP-8	47fr	-	8d	Mot
S3P03	-	MMSF3P03HD	p-MOSFET	V-MOS, LogL, 30V, 4.6A, 2.5W, <0.1Ω(5A)	SOP-8	47fr	-	8d	Mot
S4	-	R1131D141D	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
S4	-	R1225N182D	DC-DC-IC	PWM step-down, 1.8V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S40	-	BAS40TW	Si-diode	Triple, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-363	33dd	-	7b	Pjt
S40B	-	R1511S040B	LVR-IC	LDO, 4.0V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S41B	-	R1511S041B	LVR-IC	LDO, 4.1V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S42	-	BAS40ADW	Si-diode	Quad, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-363	33	D8	7b	Pjt
S42	-	SGM2122-ABYN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 250mA, +CE	SOT-23-6L	33zc	VR19	7d	Sgm
S42B	-	R1511S042B	LVR-IC	LDO, 4.2V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S43	-	BAS40CDW	Si-diode	Quad, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-363	33	D7	7b	Pjt
S43	-	SGM2027-ACYTN6G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 250mA, +CE	TSOT-23-6L	33x5	VR19	7d	Sgm
S43B	-	R1511S043B	LVR-IC	LDO, 4.3V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S44	-	BAS40SDW	Si-diode	Quad, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-363	33	D10	7b	Pjt
S44B	-	R1511S044B	LVR-IC	LDO, 4.4V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S45	-	BAS40RDW	Si-diode	Quad, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-363	33	D19	7b	Pjt
S45B	-	R1511S045B	LVR-IC	LDO, 4.5V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S46B	-	R1511S046B	LVR-IC	LDO, 4.6V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S47B	-	R1511S047B	LVR-IC	LDO, 4.7V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S48B	-	R1511S048B	LVR-IC	LDO, 4.8V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S49B	-	R1511S049B	LVR-IC	LDO, 4.9V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S4A	-	S-1721C2J2J-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, ±CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S4A	-	S-1721C2J2J-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, ±CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S4P01	-	MMSF4P01HD	p-MOSFET	V-MOS, LogL, 12V, 5.1A, 2.5W, <80mΩ(5A)	SOP-8	47fr	-	8d	Mot
S4P01Z	-	MMSF4P01Z	p-MOSFET	V-MOS, LogL, 20V, 5.7A, 2.5W, <70mΩ(5A)	SOP-8	47fr	-	8d	Mot
S4R	-	S-1721D1828-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, -CE, PUR	SOT-23-6	33x5	VR19	7d	Sii
S4S	-	S-1721D3318-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1.0%, 150mA, -CE, PUR	SNT-6A	35xv	VR19	7g	Sii
S4S	-	S-1721D3318-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1.0%, 150mA, -CE, PUR	SOT-23-6	33x5	VR19	7d	Sii
S4T	-	S-1721D1818-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±1.0%, 150mA, -CE, PUR	SNT-6A	35xv	VR19	7g	Sii
S5	-	R1131D151D	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
S5	-	R1163D151B	LVR-IC	LDO, 1.5V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
S5	-	R1225N252D	DC-DC-IC	PWM step-down, 2.5V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
S5	-	TWG4148AD-125W	Si-diode	Quad, Sw, 85V, 100mA, Vf<1.2V(100mA), <4pF	SOT-23-6	33	D8	7b	Ttr
S5	-	TWG4148AD-125WS	Si-diode	Quad, Sw, 85V, 100mA, Vf<1.2V(100mA), <4pF	SOT-363	33	D8	7b	Ttr
S50B	-	R1511S050B	LVR-IC	LDO, 5.0V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S51B	-	R1511S051B	LVR-IC	LDO, 5.1V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S52B	-	R1511S052B	LVR-IC	LDO, 5.2V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S53B	-	R1511S053B	LVR-IC	LDO, 5.3V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S54B	-	R1511S054B	LVR-IC	LDO, 5.4V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S55B	-	R1511S055B	LVR-IC	LDO, 5.5V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S56B	-	R1511S056B	LVR-IC	LDO, 5.6V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S57B	-	R1511S057B	LVR-IC	LDO, 5.7V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S58B	-	R1511S058B	LVR-IC	LDO, 5.8V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S59B	-	R1511S059B	LVR-IC	LDO, 5.9V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S5A	-	S-1721E1328-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±1.0%, 150mA, ±CE	SNT-6A	35xv	VR19	7g	Sii
S5B	-	S-1721E1528-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1.0%, 150mA, ±CE	SNT-6A	35xv	VR19	7g	Sii
S5B	-	S-1721E1528-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1.0%, 150mA, ±CE	SOT-23-6	33x5	VR19	7d	Sii
S5C	-	S-1721E1826-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1.0%, 150mA, ±CE	SOT-23-6	33x5	VR19	7d	Sii
S5D	-	S-1721E1828-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, ±CE	SNT-6A	35xv	VR19	7g	Sii
S5D	-	S-1721E1828-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1.0%, 150mA, ±CE	SOT-23-6	33x5	VR19	7d	Sii
S5E	-	S-1721E2518-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1.0%, 150mA, ±CE	SNT-6A	35xv	VR19	7g	Sii
S5F	-	S-1721E2525-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1.0%, 150mA, ±CE	SNT-6A	35xv	VR19	7g	Sii
S5G	-	S-1721E2818-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 150mA, ±CE	SNT-6A	35xv	VR19	7g	Sii
S5G	-	S-1721E2818-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 150mA, ±CE	SOT-23-6	33x5	VR19	7d	Sii
S5H	-	S-1721E2833-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 150mA, ±CE	SNT-6A	35xv	VR19	7g	Sii
S5H	-	S-1721E2833-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 150mA, ±CE	SOT-23-6	33x5	VR19	7d	Sii
S5I	-	S-1721E2J2J-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1.0%, 150mA, ±CE	SNT-6A	35xv	VR19	7g	Sii
S5J	-	S-1721E3033-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±1.0%, 150mA, ±CE	SNT-6A	35xv	VR19	7g	Sii
S5K	-	S-1721E2J25-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±1.0%, 150mA, ±CE	SNT-6A	35xv	VR19	7g	Sii
S5K	-	S-1721E2J25-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±1.0%, 150mA, ±CE	SOT-23-6	33x5	VR19	7d	Sii
S5L	-	S-1721E1833-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.0%, 150mA, ±CE	SNT-6A	35xv	VR19	7g	Sii
S5L	-	S-1721E1833-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1.0%, 150mA, ±CE	SOT-23-6	33x5	VR19	7d	Sii
S5M	-	S-1721E2813-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±1.0%, 150mA, ±CE	SOT-23-6	33x5	VR19	7d	Sii
S5N	-	S-1721E3312-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±1.0%, 150mA, ±CE	SOT-23-6	33x5	VR19	7d	Sii
S5N02	-	MMSF5N02HD	n-MOSFET	V-MOS, LogL, 20V, 8.2A, 2.5W, <25mΩ(5A)	SOP-8	47fr	-	8d	Mot
S5N03	-	MMSF5N03HD	n-MOSFET	V-MOS, LogL, 30V, 6.5A, 2.5W, <40mΩ(5A)	SOP-8	47fr	-	8d	Mot
S5N03Z	-	MMSF5N03Z	n-MOSFET	V-MOS, LogL, 30V, 7.5A, 2.5W, <30mΩ(5A)	SOP-8	47fr	-	8d	Mot
S5O	-	S-1721E2530-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1.0%, 150mA, ±CE	SNT-6A	35xv	VR19	7g	Sii
S5P	-	S-1721E3025-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±1.0%, 150mA, ±CE	SNT-6A	35xv	VR19	7g	Sii
S5Q	-	S-1721E1830-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1.0%, 150mA, ±CE	SOT-23-6	33x5	VR19	7d	Sii
S5S	-	S-1721E3012-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±1.0%, 150mA, ±CE	SNT-6A	35xv	VR19	7g	Sii
S5T	-	S-1721E2025-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±1.0%, 150mA, ±CE	SOT-23-6	33x5	VR19	7d	Sii
S5U	-	S-1721E1825-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1.0%, 150mA, ±CE	SOT-23-6	33x5	VR19	7d	Sii
S6	-	R1131D161D	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S6	-	R1163D161B	LVR-IC	LDO, 1.6V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
S6	-	R1225N332D	DC-DC-IC	PWM step-down, 3.3V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
S60B	-	R1511S060B	LVR-IC	LDO, 6.0V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S61B	-	R1511S061B	LVR-IC	LDO, 6.1V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S62	-	S-1721A3330-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S62B	-	R1511S062B	LVR-IC	LDO, 6.2V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S63	-	S-1721A3328-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S63B	-	R1511S063B	LVR-IC	LDO, 6.3V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S64	-	S-1721A1829-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S64B	-	R1511S064B	LVR-IC	LDO, 6.4V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S65B	-	R1511S065B	LVR-IC	LDO, 6.5V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S66B	-	R1511S066B	LVR-IC	LDO, 6.6V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S67	-	S-1721A1226-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S67B	-	R1511S067B	LVR-IC	LDO, 6.7V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S68	-	S-1721A2J33-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S68B	-	R1511S068B	LVR-IC	LDO, 6.8V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S69	-	S-1721A2J12-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.2V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S69B	-	R1511S069B	LVR-IC	LDO, 6.9V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S6A	-	S-1721A2613-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6B	-	S-1721A2812-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6B	-	S-1721A2812-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S6C	-	S-1721A2833-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6C	-	S-1721A2833-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S6D	-	S-1721A1225-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6E	-	S-1721A1228-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6E	-	S-1721A1228-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S6F	-	S-1721A122J-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6G	-	S-1721A1230-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6H	-	S-1721A1512-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6I	-	S-1721A1518-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6J	-	S-1721A1525-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6K	-	S-1721A152J-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6L	-	S-1721A1530-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6L	-	S-1721A1530-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S6M	-	S-1721A1533-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6M	-	S-1721A1533-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S6N	-	S-1721A1815-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6O	-	S-1721A2512-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6P	-	S-1721A2515-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6Q	-	S-1721A2525-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6R	-	S-1721A2528-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6R	-	S-1721A2528-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S6S	-	S-1721A252J-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6T	-	S-1721A2530-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6U	-	S-1721A2533-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6V	-	S-1721A2825-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6W	-	S-1721A282J-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6X	-	S-1721A2830-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6X	-	S-1721A2830-M6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1.0%, 150mA, +CE, PDR	SOT-23-6	33x5	VR19	7d	Sii
S6Y	-	S-1721A3028-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S6Z	-	S-1721A3033-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S7	-	R1131D171D	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
S7	-	R1163D171B	LVR-IC	LDO, 1.7V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
S7	-	R1225N502D	DC-DC-IC	VFM/PWM step-down, 5V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
S70B	-	R1511S070B	LVR-IC	LDO, 7.0V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S71B	-	R1511S071B	LVR-IC	LDO, 7.1V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S72B	-	R1511S072B	LVR-IC	LDO, 7.2V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S73B	-	R1511S073B	LVR-IC	LDO, 7.3V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S74B	-	R1511S074B	LVR-IC	LDO, 7.4V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S75B	-	R1511S075B	LVR-IC	LDO, 7.5V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S76B	-	R1511S076B	LVR-IC	LDO, 7.6V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S77B	-	R1511S077B	LVR-IC	LDO, 7.7V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S78B	-	R1511S078B	LVR-IC	LDO, 7.8V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S79B	-	R1511S079B	LVR-IC	LDO, 7.9V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S7A	-	S-1721A2J15-I6T1x	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35xv	VR19	7g	Sii
S7N03	-	MMSF7N03HD	n-MOSFET	V-MOS, LogL, 30V, 8.2A, 2.5W, <28mΩ(5A), 15/35ns	SOP-8	47fr	-	8d	Mot
S8	-	R1131D181D	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
S8	-	R1163D181B	LVR-IC	LDO, 1.8V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
S8	-	R1225N552D	DC-DC-IC	PWM step-down, 5.5V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
S8	-	TWG4148AC-128W	Si-diode	Quad, Sw, 85V, 100mA, Vf<1.2V(100mA), <4pF	SOT-23-6	33	D11	7b	Ttr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S8	-	TWG4148AC-128WS	Si-diode	Quad, Sw, 85V, 100mA, Vf<1.2V(100mA), <4pF	SOT-363	33	D11	7b	Ttr
S80B	-	R1511S080B	LVR-IC	LDO, 8.0V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S81B	-	R1511S081B	LVR-IC	LDO, 8.1V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S82B	-	R1511S082B	LVR-IC	LDO, 8.2V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S83B	-	R1511S083B	LVR-IC	LDO, 8.3V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S84	-	BSS84DW	p-MOSFET	Dual, V-MOS, LogL, 50V, 130mA, 300mW, 6Ω(100mA), 10/18ns	SOT-363	33	T14	7k	Pjt
S84B	-	R1511S084B	LVR-IC	LDO, 8.4V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S85B	-	R1511S085B	LVR-IC	LDO, 8.5V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S86B	-	R1511S086B	LVR-IC	LDO, 8.6V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S87B	-	R1511S087B	LVR-IC	LDO, 8.7V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S88B	-	R1511S088B	LVR-IC	LDO, 8.8V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S89B	-	R1511S089B	LVR-IC	LDO, 8.9V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
S8B	-	TWG4148CD-128WT	Si-diode	Quad, Sw, 85V, 100mA, Vf<1.2V(100mA), <4pF	SOT-563	35	D11	7b	Ttr
S9	-	R1131D191D	LVR-IC	LDO, 1.9V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
S9	-	R1163D191B	LVR-IC	LDO, 1.9V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
S9	-	R1225N602D	DC-DC-IC	PWM step-down, 6V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
S90B	-	R1511S090B	LVR-IC	LDO, 9.0V±1%, 300mA, +CE	HSOP-6J	x3	VR4	7h	Ric
SA	-	R1225N122K	DC-DC-IC	PWM step-down, 1.2V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
SA	-	RP152N049C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1%, 150mA, +CE, CL	SOT-23-6	x5	VR19	7da	Ric
SA	-	XC6603A051MR-G	LVR-IC	LDO, 0.5V±15mV, 1A, +CE	SOT-26W	au	VR11a	7d	Tor
SAA	-	S-1206B12-I6T2G	LVR-IC	LDO, 1.2V±15mV, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAB	-	S-1206B13-I6T2G	LVR-IC	LDO, 1.3V±15mV, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAC	-	S-1206B14-I6T2G	LVR-IC	LDO, 1.4V±15mV, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAD	-	S-1206B15-I6T2G	LVR-IC	LDO, 1.5V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAE	-	S-1206B16-I6T2G	LVR-IC	LDO, 1.6V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAF	-	S-1206B17-I6T2G	LVR-IC	LDO, 1.7V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAG	-	S-1206B18-I6T2G	LVR-IC	LDO, 1.8V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAH	-	S-1206B1J-I6T2G	LVR-IC	LDO, 1.85V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAI	-	S-1206B19-I6T2G	LVR-IC	LDO, 1.9V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAJ	-	S-1206B20-I6T2G	LVR-IC	LDO, 2.0V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAK	-	S-1206B21-I6T2G	LVR-IC	LDO, 2.1V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAL	-	S-1206B22-I6T2G	LVR-IC	LDO, 2.2V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAM	-	S-1206B23-I6T2G	LVR-IC	LDO, 2.3V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAN	-	S-1206B24-I6T2G	LVR-IC	LDO, 2.4V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAO	-	S-1206B25-I6T2G	LVR-IC	LDO, 2.5V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAP	-	S-1206B26-I6T2G	LVR-IC	LDO, 2.6V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAQ	-	S-1206B27-I6T2G	LVR-IC	LDO, 2.7V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAR	-	S-1206B28-I6T2G	LVR-IC	LDO, 2.8V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAS	-	S-1206B2J-I6T2G	LVR-IC	LDO, 2.85V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAT	-	S-1206B29-I6T2G	LVR-IC	LDO, 2.9V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAU	-	S-1206B30-I6T2G	LVR-IC	LDO, 3.0V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAV	-	S-1206B31-I6T2G	LVR-IC	LDO, 3.1V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAW	-	S-1206B32-I6T2G	LVR-IC	LDO, 3.2V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAX	-	S-1206B33-I6T2G	LVR-IC	LDO, 3.3V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAY	-	S-1206B34-I6T2G	LVR-IC	LDO, 3.4V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SAZ	-	S-1206B35-I6T2G	LVR-IC	LDO, 3.5V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SB	-	R1225N152K	DC-DC-IC	PWM step-down, 1.5V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
SB	-	XC6603A061MR-G	LVR-IC	LDO, 0.6V±15mV, 1A, +CE	SOT-26W	au	VR11a	7d	Tor
SBA	-	S-1206B36-I6T2G	LVR-IC	LDO, 3.6V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SBB	-	S-1206B37-I6T2G	LVR-IC	LDO, 3.7V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SBC	-	S-1206B38-I6T2G	LVR-IC	LDO, 3.8V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SBD	-	S-1206B39-I6T2G	LVR-IC	LDO, 3.9V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SBE	-	S-1206B40-I6T2G	LVR-IC	LDO, 4.0V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SBF	-	S-1206B41-I6T2G	LVR-IC	LDO, 4.1V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SBG	-	S-1206B42-I6T2G	LVR-IC	LDO, 4.2V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SBH	-	S-1206B43-I6T2G	LVR-IC	LDO, 4.3V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SBI	-	S-1206B44-I6T2G	LVR-IC	LDO, 4.4V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SBJ	-	S-1206B45-I6T2G	LVR-IC	LDO, 4.5V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SBK	-	S-1206B46-I6T2G	LVR-IC	LDO, 4.6V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SBL	-	S-1206B47-I6T2G	LVR-IC	LDO, 4.7V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SBM	-	S-1206B48-I6T2G	LVR-IC	LDO, 4.8V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SBN	-	S-1206B49-I6T2G	LVR-IC	LDO, 4.9V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SBO	-	S-1206B50-I6T2G	LVR-IC	LDO, 5.0V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SBP	-	S-1206B51-I6T2G	LVR-IC	LDO, 5.1V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SBQ	-	S-1206B52-I6T2G	LVR-IC	LDO, 5.2V±1.0%, 250mA	SNT-6A	35ev	VR1	7g	Sii
SC	-	R1225N182K	DC-DC-IC	PWM step-down, 1.8V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
SC	-	XC6603A071MR-G	LVR-IC	LDO, 0.7V±15mV, 1A, +CE	SOT-26W	au	VR11a	7d	Tor
SD	-	R1225N252K	DC-DC-IC	PWM step-down, 2.5V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
SD	-	XC6603A081MR-G	LVR-IC	LDO, 0.8V±15mV, 1A, +CE	SOT-26W	au	VR11a	7d	Tor
SD2	-	BAS40SDWGP	Si-diode	Quad, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	SOT-363	33	D10	7b	Chm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SD3	-	BAS70SDWGP	Si-diode	Quad, SBD, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOT-363	33	D10	7b	Chm
SE	-	R1225N332K	DC-DC-IC	PWM step-down, 3.3V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
SE	-	XC6603A091MR-G	LVR-IC	LDO, 0.9V±15mV, 1A, +CE	SOT-26W	au	VR11a	7d	Tor
SE2	-	S-1135A34-A6T1S	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SE3	-	S-1135A35-A6T1S	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEA	-	S-1135A10-A6T1S	LVR-IC	LDO, 1.0V±15mV, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEB	-	S-1135A11-A6T1S	LVR-IC	LDO, 1.1V±15mV, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEC	-	S-1135A12-A6T1S	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SED	-	S-1135A13-A6T1S	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEE	-	S-1135A14-A6T1S	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEF	-	S-1135A15-A6T1S	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEG	-	S-1135A16-A6T1S	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEH	-	S-1135A17-A6T1S	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEI	-	S-1135A18-A6T1S	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEJ	-	S-1135A1J-A6T1S	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEK	-	S-1135A19-A6T1S	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEL	-	S-1135A20-A6T1S	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEM	-	S-1135A21-A6T1S	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEN	-	S-1135A22-A6T1S	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEO	-	S-1135A23-A6T1S	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEP	-	S-1135A24-A6T1S	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEQ	-	S-1135A25-A6T1S	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SER	-	S-1135A26-A6T1S	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SES	-	S-1135A27-A6T1S	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SET	-	S-1135A28-A6T1S	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEU	-	S-1135A2J-A6T1S	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEV	-	S-1135A29-A6T1S	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEW	-	S-1135A30-A6T1S	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEX	-	S-1135A31-A6T1S	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEY	-	S-1135A32-A6T1S	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SEZ	-	S-1135A33-A6T1S	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43er	VR4	7g	Sii
SF	-	R1225N502K	DC-DC-IC	PWM step-down, 5V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
SF	-	XC6603A101MR-G	LVR-IC	LDO, 1.0V±15mV, 1A, +CE	SOT-26W	au	VR11a	7d	Tor
SG	-	R1225N552K	DC-DC-IC	PWM step-down, 5.5V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
SG2	-	S-1135B34-A6T1S	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SG3	-	S-1135B35-A6T1S	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGA	-	S-1135B10-A6T1S	LVR-IC	LDO, 1.0V±15mV, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGB	-	S-1135B11-A6T1S	LVR-IC	LDO, 1.1V±15mV, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGC	-	S-1135B12-A6T1S	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGD	-	S-1135B13-A6T1S	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGE	-	S-1135B14-A6T1S	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGF	-	S-1135B15-A6T1S	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGG	-	S-1135B16-A6T1S	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGH	-	S-1135B17-A6T1S	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGI	-	S-1135B18-A6T1S	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGJ	-	S-1135B1J-A6T1S	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGK	-	S-1135B19-A6T1S	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGL	-	S-1135B20-A6T1S	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGM	-	S-1135B21-A6T1S	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGN	-	S-1135B22-A6T1S	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGO	-	S-1135B23-A6T1S	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGP	-	S-1135B24-A6T1S	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGQ	-	S-1135B25-A6T1S	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGR	-	S-1135B26-A6T1S	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGS	-	S-1135B27-A6T1S	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGT	-	S-1135B28-A6T1S	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGU	-	S-1135B2J-A6T1S	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGV	-	S-1135B29-A6T1S	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGW	-	S-1135B30-A6T1S	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGX	-	S-1135B31-A6T1S	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGY	-	S-1135B32-A6T1S	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SGZ	-	S-1135B33-A6T1S	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, CL	HSNT-6A	43er	VR4	7g	Sii
SH	-	R1225N602K	DC-DC-IC	PWM step-down, 6V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
SH	-	XC6603A111MR-G	LVR-IC	LDO, 1.1V±15mV, 1A, +CE	SOT-26W	au	VR11a	7d	Tor
SJ	-	R1225N302C	DC-DC-IC	PWM step-down, 3V±2%, 300kHz	SOT-23-6W	so	DC7	7da	Ric
SK	-	R1225N302D	DC-DC-IC	PWM step-down, 3V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric
SK	-	XC6603A121MR-G	LVR-IC	LDO, 1.2V±15mV, 1A, +CE	SOT-26W	au	VR11a	7d	Tor
SL	-	R1225N302K	DC-DC-IC	PWM step-down, 3V±2%, 180kHz	SOT-23-6W	so	DC7	7da	Ric
SL	-	XC6603A131MR-G	LVR-IC	LDO, 1.3V±20mV, 1A, +CE	SOT-26W	au	VR11a	7d	Tor
SM	-	R1225N162D	DC-DC-IC	PWM step-down, 1.6V±2%, 500kHz	SOT-23-6W	so	DC7	7da	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SM	-	XC6603A141MR-G	LVR-IC	LDO, 1.4V±20mV, 1A, +CE	SOT-26W	au	VR11a	7d	Tor
SM24	hc	MIC2289-24YD6	LDR-IC	1.2 MHz PWM White LED driver, OVP 24V, Pb Free	SOT-23-6	33a4	LD1	7b	Mcr
SN	-	XC6603A151MR-G	LVR-IC	LDO, 1.5V±20mV, 1A, +CE	SOT-26W	au	VR11a	7d	Tor
SOCM	-	SN74LVC3G07MDCU	CMOS-Log	Triple noninverting buffers/drivers (ODO)	VSSOP-8	55	Log73	8i	Ti
SP	-	XC6603A161MR-G	LVR-IC	LDO, 1.6V±20mV, 1A, +CE	SOT-26W	au	VR11a	7d	Tor
SR	-	XC6603A171MR-G	LVR-IC	LDO, 1.7V±20mV, 1A, +CE	SOT-26W	au	VR11a	7d	Tor
SS	-	XC6603A181MR-G	LVR-IC	LDO, 1.8V±20mV, 1A, +CE	SOT-26W	au	VR11a	7d	Tor
T0	-	R1131D201D	LVR-IC	LDO, 2.0V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
T0	-	R1163D201B	LVR-IC	LDO, 2.0V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
T00	-	74HCT2G00DC	CMOS-Log	Dual 2-input NAND gates	SOT765-1	55	Log50	8d	Nxp
T00	-	74HCT2G00DP	CMOS-Log	Dual 2-input NAND gates	SOT505-2	47	Log50	8d	Nxp
T00	-	HD74LV2GT00AUS	CMOS-Log	Dual 2-input NAND gates	SSOP-8	47	Log50	8c	Ren
T02	-	74HCT2G02DC	CMOS-Log	Dual 2-input NOR gates	SOT765-1	55	Log53	8d	Nxp
T02	-	74HCT2G02DP	CMOS-Log	Dual 2-input NOR gates	SOT505-2	47	Log53	8d	Nxp
T02	-	HD74LV2GT02AUS	CMOS-Log	Dual 2-input NOR gates	SSOP-8	47	Log53	8c	Ren
T04	-	74HCT3G04DC	CMOS-Log	Triple inverters	SOT765-1	55	Log56	8d	Nxp
T04	-	74HCT3G04DP	CMOS-Log	Triple inverters	SOT505-2	47	Log56	8d	Nxp
T04	-	HD74LV2GT04AUS	CMOS-Log	Triple inverters	SSOP-8	47	Log56	8c	Ren
T06	-	74HCT3G06DC	CMOS-Log	Triple inverters (ODO)	SOT765-1	55	Log72	8d	Nxp
T06	-	74HCT3G06DP	CMOS-Log	Triple inverters (ODO)	SOT505-2	47	Log72	8d	Nxp
T07	-	74HCT3G07DC	CMOS-Log	Triple noninverting buffers/drivers (ODO)	SOT765-1	55	Log73	8d	Nxp
T07	-	74HCT3G07DP	CMOS-Log	Triple noninverting buffers/drivers (ODO)	SOT505-2	47	Log73	8d	Nxp
T08	-	74HCT2G08DC	CMOS-Log	Dual 2-input AND gates	SOT765-1	55	Log51	8d	Nxp
T08	-	74HCT2G08DP	CMOS-Log	Dual 2-input AND gates	SOT505-2	47	Log51	8d	Nxp
T08	-	HD74LV2GT08AUS	CMOS-Log	Dual 2-input AND gates	SSOP-8	47	Log51	8c	Ren
T1	-	IMT1A	Si-pnp	Dual, 60V, 500mA, 200MHz	SOT-363	33	T10	7b	Rhm
T1	-	R1131D211D	LVR-IC	LDO, 2.1V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
T1	-	R1163D211B	LVR-IC	LDO, 2.1V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
T11048	-	ZDT1048	Si-npn	Dual, Sw, 50V, 5A, 2.25W, B=280..1200, 150MHz	SOP-8	47	-	8d	Zx
T125	-	74HCT2G125DP	CMOS-Log	Dual bus buffer with 3-state output	SOT505-2	47	Log54	8d	Nxp
T126	-	74HCT2G126DP	CMOS-Log	Dual bus buffer with 3-state output	SOT505-2	47	Log55	8d	Nxp
T12P40DX	-	ZXT12P40DX	Si-pnp	Dual, Sw, 50V, 2A, 1.25W, B=300..900, 130MHz	MSOP-8	55	T31	8d	Zx
T14	-	74HCT3G14DC	CMOS-Log	Triple Schmitt-trigger inverters	SOT765-1	55	Log57	8d	Nxp
T14	-	74HCT3G14DP	CMOS-Log	Triple Schmitt-trigger inverters	SOT505-2	47	Log57	8d	Nxp
T14	-	HD74LV2GT14AUS	CMOS-Log	Triple Schmitt-trigger inverters	SSOP-8	47	Log57	8c	Ren
T2	-	R1131D221D	LVR-IC	LDO, 2.2V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
T2	-	R1163D221B	LVR-IC	LDO, 2.2V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
T23	-	HD74LV2GT123AUS	CMOS-Log	Retriggerable monostable multivibrator	SSOP-8	47	Log75	8c	Ren
T25	-	74HCT2G125DC	CMOS-Log	Dual bus buffer with 3-state output	SOT765-1	55	Log54	8d	Nxp
T25	-	HD74LV2GT125AUS	CMOS-Log	Dual bus buffer with 3-state output	SSOP-8	47	Log54	8c	Ren
T26	-	74HCT2G126DC	CMOS-Log	Dual bus buffer with 3-state output	SOT765-1	55	Log55	8d	Nxp
T26	-	HD74LV2GT126AUS	CMOS-Log	Dual bus buffer with 3-state output	SSOP-8	47	Log55	8c	Ren
T3	-	R1131D231D	LVR-IC	LDO, 2.3V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
T3	-	R1163D231B	LVR-IC	LDO, 2.3V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
T32	-	74HCT2G32DC	CMOS-Log	Dual 2-input OR gates	SOT765-1	55	Log52	8d	Nxp
T32	-	74HCT2G32DP	CMOS-Log	Dual 2-input OR gates	SOT505-2	47	Log52	8d	Nxp
T32	-	HD74LV2GT32AUS	CMOS-Log	Dual 2-input OR gates	SSOP-8	47	Log52	8c	Ren
T34	-	74HCT3G34DP	CMOS-Log	Triple non-inverter buffers	SOT505-2	47	Log69	8d	Nxp
T34	-	HD74LV2GT34AUS	CMOS-Log	Triple non-inverter buffers	SSOP-8	47	Log69	8c	Ren
T4	-	IMT4	Si-pnp	Dual, 120V, 50mA, 140MHz	SOT-363	33	T16	7b	Rhm
T4	-	MBD330DW	Si-diode	Dual, Schottky, UHF/VHF-Det, 30V, 120mW, <1pF	SOT-363	33de	-	7b	Ons
T4	-	R1131D241D	LVR-IC	LDO, 2.4V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
T4	-	R1163D241B	LVR-IC	LDO, 2.4V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
T40	-	HD74LV2GT240AUS	CMOS-Log	Dual bus buffer inverted with 3-state output	SSOP-8	47	Log67	8c	Ren
T41	-	HD74LV2GT241AUS	CMOS-Log	Dual bus buffer non-inverted with 3-state output	SSOP-8	47	Log60	8c	Ren
T45	-	HD74LV2GT245AUS	CMOS-Log	Dual bus transceivers with 3-state output	SSOP-8	47	Log74	8c	Ren
T5	-	R1131D251D	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
T5	-	R1163D251B	LVR-IC	LDO, 2.5V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
T53	-	HD74LV2GT53AUS	CMOS-Log	2-channel analog multiplexer/demultiplexer	SSOP-8	47	Log58	8c	Ren
T57	-	HD74LV2GT157AUS	CMOS-Log	2-input multiplexer	SSOP-8	47	Log66	8c	Ren
T6	-	R1131D261D	LVR-IC	LDO, 2.6V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
T6	-	R1163D261B	LVR-IC	LDO, 2.6V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
T605	-	ZDT605	Si-npn-Darl	Dual, 140/120V, 1A, B=2k..100k	SOP-8	47	T31	8d	Zx
T617	-	ZDT617	Si-npn	Dual, Hi-beta, Lo-sat, 15V, 3A, 2W, >80MHz, B>300, 120/160ns	SOP-8	47	T31	8d	Zx
T619	-	ZDT619	Si-npn	Dual, Hi-beta, Lo-sat, 50V, 2A, >100MHz, B>300, 170/750ns	SOP-8	47	T31	8d	Zx
T649	-	ZDT649	Si-npn	Dual, lo-sat, 35V, 2A, >150MHz, 55/300ns	SOP-8	47	T31	8d	Zx
T651	-	ZDT651	Si-npn	Dual, lo-sat, 80V, 2A, >150MHz	SOP-8	47	T31	8d	Zx
T66	-	74HCT2G66DP	CMOS-Log	2-channel analog switch	SOT505-2	47	Log68	8d	Nxp
T66	-	HD74LV2GT66AUS	CMOS-Log	2-channel analog switch	SSOP-8	47	Log68	8c	Ren
T6702	-	ZDT6702	Si-n/p-Darl	T1=pnp, T2=npn, 80V, 2A, B>2000	SOP-8	47	T32	8d	Zx



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T6705	-	ZDT6705	Si-n/p-Darl	HV, 140V, 1A, 2.25W, B>2000, 160MHz	SOP-8	47	T32	8d	Zx
T6718	-	ZDT6718	Si-n/p	T1=pnp, T2=npn, 20V, 1.5+2A, B>300, >150MHz+>100MHz	SOP-8	47	T32	8d	Zx
T6753	-	ZDT6753	Si-n/p	T1=pnp, T2=npn, Lo-sat, 120/100V, 2A, >100MHz+>150MHz	SOP-8	47	T32	8d	Zx
T6757	-	ZDT6757	Si-n/p	T1=pnp, T2=npn, 300/300V, 0.5A, >30MHz	SOP-8	47	T32	8d	Zx
T6790	-	ZDT6790	Si-n/p	Dual, Hi-beta, lo-sat, 50+45V, 1A, B>200+B>400, >100+>150MHz	SOP-8	47	T32	8d	Zx
T690	-	ZDT690	Si-npn	Dual, Hi-beta, Lo-sat, 45V, 2A, >150MHz, B>400, 33/1300ns	SOP-8	47	T31	8d	Zx
T694	-	ZDT694	Si-npn	Dual, Hi-beta, Lo-sat, 120V, 0.5A, >130MHz, B>400, 80/290ns	SOP-8	47	T31	8d	Zx
T7	-	R1131D271D	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
T7	-	R1163D271B	LVR-IC	LDO, 2.7V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
T705	-	ZDT705	Si-pnp-Darl	Dual, 140V, 1A, 2.25W, B=3k..30k, 160MHz	SOP-8	47	T31	8d	Zx
T717	-	ZDT717	Si-pnp	Dual, Hi-beta, Lo-sat, 12V, 2.5A, >80MHz, B>300, 70/130ns	SOP-8	47	T30	8d	Zx
T73	-	μPA803T-FB	Si-npn	Dual, VHF/UHF, 20V, 30mA, 120mW, 5.5GHz, B=60..120	SOT-363	33	T2	7b	Nec
T74	-	μPA803T-GB	Si-npn	Dual, VHF/UHF, 20V, 30mA, 120mW, 5.5GHz, B=100.200	SOT-363	33	T2	7b	Nec
T74	-	HD74LV2GT74AUS	CMOS-Log	D-type flip-flop with preset and clear	SSOP-8	47	Log59	8c	Ren
T749	-	ZDT749	Si-pnp	Dual, lo-sat, 35V, 2A, >100MHz	SOP-8	47	T30	8d	Zx
T758	-	ZDT758	Si-pnp	Dual, Sw, 400/400V, 0.5A, >50MHz	SOP-8	47	T30	8d	Zx
T76	-	μPA804T-FB	Si-npn	Dual, VHF/UHF, 20V, 60mA, 120mW, 5GHz, B=60..120	FTUSM-6	35	T2	7b	Nec
T77	-	μPA804T-GB	Si-npn	Dual, VHF/UHF, 20V, 60mA, 120mW, 5GHz, B=100..200	FTUSM-6	35	T2	7b	Nec
T8	-	R1131D281D	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
T8	-	R1163D281B	LVR-IC	LDO, 2.8V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
T82	-	μPA805T-KB	Si-npn	Dual, VHF/UHF, 9V, 10mA, 60mW, 12GHz, B=75..150	SOT-363	33	T2	7b	Nec
T83	-	μPA806T-KB	Si-npn	Dual, VHF/UHF, 9V, 30mA, 150mW, 12GHz, B=75..150	SOT-363	33	T2	7b	Nec
T84	-	μPA807T-KB	Si-npn	Dual, VHF/UHF, 5V, 10mA, 30mW, 13GHz, B=70..140	SOT-363	33	T2	7b	Nec
T86	-	μPA808T-KB	Si-npn	Dual, VHF/UHF, 5V, 30mA, 90mW, 11GHz, B=70..140	SOT-363	33	T2	7b	Nec
T86	-	74HCT2G86DC	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	SOT765-1	55	Log65	8d	Nxp
T86	-	74HCT2G86DP	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	SOT505-2	47	Log65	8d	Nxp
T86	-	HD74LV2GT86AUS	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	SSOP-8	47	Log65	8c	Ren
T88	-	μPA809T-KB	Si-npn	Dual, VHF/UHF, 9V, 100mA, 150mW, 4.5GHz, B=80..160	SOT-363	33	T2	7b	Nec
T9	-	R1131D291D	LVR-IC	LDO, 2.9V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
T9	-	R1163D291B	LVR-IC	LDO, 2.9V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
T97	-	2SC5409-T1	Si-npn	UHF, 5V, 30mA, 90mW, B=70..140, 16GHz	SOT-363	33ah	-	7b	Nec
TA	-	XC6604A051MR-G	LVR-IC	LDO, 0.5V±15mV, 1A, +CE, soft start	SOT-26W	aw	VR11a	7d	Tor
TA00	-	MIC280-0BM6	Tdet-IC	Setable Thermal Supervisor (-60..+100C°), I2C- bus	SOT-23-6	33hb	-	7b	Mcr
TA00	hc	MIC280-0YM6	Tdet-IC	Setable Thermal Supervisor (-60..+100C°), I2C- bus, Pb. Free	SOT-23-6	33hb	-	7b	Mcr
TA01	-	MIC280-1BM6	Tdet-IC	Setable Thermal Supervisor (-60..+100C°), I2C- bus	SOT-23-6	33hb	-	7b	Mcr
TA01	hc	MIC280-1YM6	Tdet-IC	Setable Thermal Supervisor (-60..+100C°), I2C- bus, Pb. Free	SOT-23-6	33hb	-	7b	Mcr
TA02	-	MIC280-2BM6	Tdet-IC	Setable Thermal Supervisor (-60..+100C°), I2C- bus	SOT-23-6	33hb	-	7b	Mcr
TA02	hc	MIC280-2YM6	Tdet-IC	Setable Thermal Supervisor (-60..+100C°), I2C- bus, Pb. Free	SOT-23-6	33hb	-	7b	Mcr
TA03	-	MIC280-3BM6	Tdet-IC	Setable Thermal Supervisor (-60..+100C°), I2C- bus	SOT-23-6	33hb	-	7b	Mcr
TA03	hc	MIC280-3YM6	Tdet-IC	Setable Thermal Supervisor (-60..+100C°), I2C- bus, Pb. Free	SOT-23-6	33hb	-	7b	Mcr
TA04	-	MIC280-4BM6	Tdet-IC	Setable Thermal Supervisor (-60..+100C°), I2C- bus	SOT-23-6	33hb	-	7b	Mcr
TA04	hc	MIC280-4YM6	Tdet-IC	Setable Thermal Supervisor (-60..+100C°), I2C- bus, Pb. Free	SOT-23-6	33hb	-	7b	Mcr
TA05	-	MIC280-5BM6	Tdet-IC	Setable Thermal Supervisor (-60..+100C°), I2C- bus	SOT-23-6	33hb	-	7b	Mcr
TA05	hc	MIC280-5YM6	Tdet-IC	Setable Thermal Supervisor (-60..+100C°), I2C- bus, Pb. Free	SOT-23-6	33hb	-	7b	Mcr
TA06	-	MIC280-6BM6	Tdet-IC	Setable Thermal Supervisor (-60..+100C°), I2C- bus	SOT-23-6	33hb	-	7b	Mcr
TA06	hc	MIC280-6YM6	Tdet-IC	Setable Thermal Supervisor (-60..+100C°), I2C- bus, Pb. Free	SOT-23-6	33hb	-	7b	Mcr
TA07	-	MIC280-7BM6	Tdet-IC	Setable Thermal Supervisor (-60..+100C°), I2C- bus	SOT-23-6	33hb	-	7b	Mcr
TA07	hc	MIC280-7YM6	Tdet-IC	Setable Thermal Supervisor (-60..+100C°), I2C- bus, Pb. Free	SOT-23-6	33hb	-	7b	Mcr
TB	-	μPA1910TE	p-MOSFET	V-MOS, LogL, 12V, ±2.5A, 200mW, <130mΩ(1A)	SC-95	33fc	-	7b	Nec
TB	-	XC6604A061MR-G	LVR-IC	LDO, 0.6V±15mV, 1A, +CE, soft start	SOT-26W	aw	VR11a	7d	Tor
TB00	-	MIC281-0BM6	Tdet-IC	Setable Thermal Supervisor (0..+100C°), I2C- bus	SOT-23-6	33hc	-	7b	Mcr
TB00	hc	MIC281-0YM6	Tdet-IC	Setable Thermal Supervisor (0..+100C°), I2C- bus, Pb. Free	SOT-23-6	33hc	-	7b	Mcr
TB01	-	MIC281-1BM6	Tdet-IC	Setable Thermal Supervisor (0..+100C°), I2C- bus	SOT-23-6	33hc	-	7b	Mcr
TB01	hc	MIC281-1YM6	Tdet-IC	Setable Thermal Supervisor (0..+100C°), I2C- bus, Pb. Free	SOT-23-6	33hc	-	7b	Mcr
TB02	-	MIC281-2BM6	Tdet-IC	Setable Thermal Supervisor (0..+100C°), I2C- bus	SOT-23-6	33hc	-	7b	Mcr
TB02	hc	MIC281-2YM6	Tdet-IC	Setable Thermal Supervisor (0..+100C°), I2C- bus, Pb. Free	SOT-23-6	33hc	-	7b	Mcr
TB03	-	MIC281-3BM6	Tdet-IC	Setable Thermal Supervisor (0..+100C°), I2C- bus	SOT-23-6	33hc	-	7b	Mcr
TB03	hc	MIC281-3YM6	Tdet-IC	Setable Thermal Supervisor (0..+100C°), I2C- bus, Pb. Free	SOT-23-6	33hc	-	7b	Mcr
TB04	-	MIC281-4BM6	Tdet-IC	Setable Thermal Supervisor (0..+100C°), I2C- bus	SOT-23-6	33hc	-	7b	Mcr
TB04	hc	MIC281-4YM6	Tdet-IC	Setable Thermal Supervisor (0..+100C°), I2C- bus, Pb. Free	SOT-23-6	33hc	-	7b	Mcr
TB05	-	MIC281-5BM6	Tdet-IC	Setable Thermal Supervisor (0..+100C°), I2C- bus	SOT-23-6	33hc	-	7b	Mcr
TB05	hc	MIC281-5YM6	Tdet-IC	Setable Thermal Supervisor (0..+100C°), I2C- bus, Pb. Free	SOT-23-6	33hc	-	7b	Mcr
TB06	-	MIC281-6BM6	Tdet-IC	Setable Thermal Supervisor (0..+100C°), I2C- bus	SOT-23-6	33hc	-	7b	Mcr
TB06	hc	MIC281-6YM6	Tdet-IC	Setable Thermal Supervisor (0..+100C°), I2C- bus, Pb. Free	SOT-23-6	33hc	-	7b	Mcr
TB07	-	MIC281-7BM6	Tdet-IC	Setable Thermal Supervisor (0..+100C°), I2C- bus	SOT-23-6	33hc	-	7b	Mcr
TB07	hc	MIC281-7YM6	Tdet-IC	Setable Thermal Supervisor (0..+100C°), I2C- bus, Pb. Free	SOT-23-6	33hc	-	7b	Mcr
TBD	-	TPA6204A1DGN	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.7W(5V/8Ω), shutdown	SSOP-8	47	AFP22	8d	Ti
TC	-	μPA1911TE	p-MOSFET	V-MOS, LogL, 20V, ±2.5A, 200mW, <190mΩ(1A)	SC-95	33fc	-	7b	Nec
TC	-	XC6604A071MR-G	LVR-IC	LDO, 0.7V±15mV, 1A, +CE, soft start	SOT-26W	aw	VR11a	7d	Tor
TD	-	μPA1912TE	p-MOSFET	V-MOS, LogL, 12V, ±4.5A, 200mW, <70mΩ(2.5A)	SC-95	33fc	-	7b	Nec



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
TD	-	XC6604A081MR-G	LVR-IC	LDO, 0.8V±15mV, 1A, +CE, soft start	SOT-26W	aw	VR11a	7d	Tor
TE	-	µPA1913TE	p-MOSFET	V-MOS, LogL, 20V, ±4.5A, 200mW,<90mΩ(2.5A)	SC-95	33fc	-	7b	Nec
TE	-	XC6604A091MR-G	LVR-IC	LDO, 0.9V±15mV, 1A, +CE, soft start	SOT-26W	aw	VR11a	7d	Tor
TF	-	µPA1914TE	p-MOSFET	V-MOS, LogL, 30V, ±4.5A, 200mW,<96mΩ(2.5A)	SC-95	33fc	-	7b	Nec
TF	-	XC6604A101MR-G	LVR-IC	LDO, 1.0V±15mV, 1A, +CE, soft start	SOT-26W	aw	VR11a	7d	Tor
TG	-	µPA1900TE	n-MOSFET	V-MOS, LogL, 20V, ±5.5A, 200mW, <45mΩ(3A)	SC-95	33fc	-	7b	Nec
TH	-	µPA1915TE	p-MOSFET	V-MOS, LogL, 20V, ±4.5A, 200mW,<90mΩ(2.5A)	SC-95	33fc	-	7b	Nec
TH	-	XC6604A111MR-G	LVR-IC	LDO, 1.1V±15mV, 1A, +CE, soft start	SOT-26W	aw	VR11a	7d	Tor
TK	-	XC6604A121MR-G	LVR-IC	LDO, 1.2V±15mV, 1A, +CE, soft start	SOT-26W	aw	VR11a	7d	Tor
TL	-	µPA1916TE	p-MOSFET	V-MOS, LogL, 12V, ±4.5A, 200mW,<55mΩ(2.5A)	SC-95	33fc	-	7b	Nec
TL	-	XC6604A131MR-G	LVR-IC	LDO, 1.3V±20mV, 1A, +CE, soft start	SOT-26W	aw	VR11a	7d	Tor
TM	-	µPA1950TE	p-MOSFET	Dual, V-MOS, LogL, 12V, ±2.5A, 570mW,<205mΩ(1.5A)	SC-95	33f4	-	7b	Nec
TM	-	KIC7SZ241FU	CMOS-Log	Dual bus buffer inverted with 3-state output	US8	47	Log60	8c	Kec
TM	-	XC6604A141MR-G	LVR-IC	LDO, 1.4V±20mV, 1A, +CE, soft start	SOT-26W	aw	VR11a	7d	Tor
TN	-	µPA1951TE	p-MOSFET	Dual, V-MOS, LogL, 12V, ±2.5A, 570mW,<133mΩ(1.5A)	SC-95	33f4	-	7b	Nec
TN	-	XC6604A151MR-G	LVR-IC	LDO, 1.5V±20mV, 1A, +CE, soft start	SOT-26W	aw	VR11a	7d	Tor
TP	-	µPA1952TE	p-MOSFET	Dual, V-MOS, LogL, 20V, ±2A, 570mW,<183mΩ(1A)	SC-95	33f4	-	7b	Nec
TP	-	XC6604A161MR-G	LVR-IC	LDO, 1.6V±20mV, 1A, +CE, soft start	SOT-26W	aw	VR11a	7d	Tor
TQ	-	µPA1901TE	n-MOSFET	V-MOS, LogL, 30V, ±6.5A, 200mW, <45mΩ(3A)	SC-95	33fc	-	7b	Nec
TR	-	µPA1917TE	p-MOSFET	V-MOS, LogL, 20V, ±6A, 200mW,<70mΩ(3A)	SC-95	33fc	-	7b	Nec
TR	-	XC6604A171MR-G	LVR-IC	LDO, 1.7V±20mV, 1A, +CE, soft start	SOT-26W	aw	VR11a	7d	Tor
TS	-	µPA1918TE	p-MOSFET	V-MOS, LogL, 60V, ±3.5A, 200mW,<190mΩ(3A)	SC-95	33fc	-	7b	Nec
TS	-	XC6604A181MR-G	LVR-IC	LDO, 1.8V±20mV, 1A, +CE, soft start	SOT-26W	aw	VR11a	7d	Tor
TT	-	NC7S32L6	CMOS-Log	2-input OR gate	MPAK-6	33	Log4	7b	F
TU	-	74LVC1G10DW	CMOS-Log	3-input NAND gate	SOT-363	33	Log29	7p	Di
TU	-	74LVC1G10W6	CMOS-Log	3-input NAND gate	SOT-26	33	Log29	7p	Di
TU	-	XC6604B101MR-G	LVR-IC	LDO, 1.0V±15mV, 1A, +CE	SOT-26W	aw	VR11a	7d	Tor
TV	-	74LVC1G11DW	CMOS-Log	3-input AND gate	SOT-363	33	Log30	7p	Di
TV	-	74LVC1G11W6	CMOS-Log	3-input AND gate	SOT-26	33	Log30	7p	Di
TVA	-	S-11L10B08-I6T2G	LVR-IC	LDO, 0.8V±15mV, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVB	-	S-11L10B09-I6T2G	LVR-IC	LDO, 0.9V±15mV, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVC	-	S-11L10B10-I6T2G	LVR-IC	LDO, 1.0V±15mV, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVD	-	S-11L10B11-I6T2G	LVR-IC	LDO, 1.1V±15mV, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVE	-	S-11L10B12-I6T2G	LVR-IC	LDO, 1.2V±15mV, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVF	-	S-11L10B13-I6T2G	LVR-IC	LDO, 1.3V±15mV, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVG	-	S-11L10B14-I6T2G	LVR-IC	LDO, 1.4V±15mV, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVH	-	S-11L10B15-I6T2G	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVI	-	S-11L10B16-I6T2G	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVJ	-	S-11L10B17-I6T2G	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVK	-	S-11L10B18-I6T2G	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVL	-	S-11L10B19-I6T2G	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVM	-	S-11L10B20-I6T2G	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVN	-	S-11L10B21-I6T2G	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVO	-	S-11L10B22-I6T2G	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVP	-	S-11L10B23-I6T2G	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVQ	-	S-11L10B24-I6T2G	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVR	-	S-11L10B25-I6T2G	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVS	-	S-11L10B26-I6T2G	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVT	-	S-11L10B27-I6T2G	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVU	-	S-11L10B28-I6T2G	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVV	-	S-11L10B29-I6T2G	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVW	-	S-11L10B30-I6T2G	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVX	-	S-11L10B31-I6T2G	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVY	-	S-11L10B32-I6T2G	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TVZ	-	S-11L10B33-I6T2G	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE, PDR	SNT-6A	35vr4	VR4	7g	Sii
TW	-	74LVC1G57DW	CMOS-Log	Configurable multiple-function gate	SOT-363	33	Log36	7p	Di
TW	-	74LVC1G57W6	CMOS-Log	Configurable multiple-function gate	SOT-26	33	Log36	7p	Di
TW	-	74LVC1G98DW	CMOS-Log	Configurable multiple-function gate	SOT-363	33	Log43	7p	Di
TW	-	74LVC1G98W6	CMOS-Log	Configurable multiple-function gate	SOT-26	33	Log43	7p	Di
TX	-	µPA1919TE	p-MOSFET	V-MOS, LogL, 20V, ±6A, 200mW,<94mΩ(3A)	SC-95	33fc	-	7b	Nec
TX	-	74LVC1G58DW	CMOS-Log	Configurable multiple-function gate	SOT-363	33	Log37	7p	Di
TX	-	74LVC1G58W6	CMOS-Log	Configurable multiple-function gate	SOT-26	33	Log37	7p	Di
TXA	-	S-11L10D08-I6T2G	LVR-IC	LDO, 0.8V±15mV, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXB	-	S-11L10D09-I6T2G	LVR-IC	LDO, 0.9V±15mV, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXC	-	S-11L10D10-I6T2G	LVR-IC	LDO, 1.0V±15mV, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXD	-	S-11L10D11-I6T2G	LVR-IC	LDO, 1.1V±15mV, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXE	-	S-11L10D12-I6T2G	LVR-IC	LDO, 1.2V±15mV, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXF	-	S-11L10D13-I6T2G	LVR-IC	LDO, 1.3V±15mV, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXG	-	S-11L10D14-I6T2G	LVR-IC	LDO, 1.4V±15mV, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXH	-	S-11L10D15-I6T2G	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
TXI	-	S-11L10D16-I6T2G	LVR-IC	LDO, 1.6V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXJ	-	S-11L10D17-I6T2G	LVR-IC	LDO, 1.7V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXK	-	S-11L10D18-I6T2G	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXL	-	S-11L10D19-I6T2G	LVR-IC	LDO, 1.9V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXM	-	S-11L10D20-I6T2G	LVR-IC	LDO, 2.0V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXN	-	S-11L10D21-I6T2G	LVR-IC	LDO, 2.1V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXO	-	S-11L10D22-I6T2G	LVR-IC	LDO, 2.2V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXP	-	S-11L10D23-I6T2G	LVR-IC	LDO, 2.3V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXQ	-	S-11L10D24-I6T2G	LVR-IC	LDO, 2.4V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXR	-	S-11L10D25-I6T2G	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXS	-	S-11L10D26-I6T2G	LVR-IC	LDO, 2.6V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXT	-	S-11L10D27-I6T2G	LVR-IC	LDO, 2.7V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXU	-	S-11L10D28-I6T2G	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXV	-	S-11L10D29-I6T2G	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXW	-	S-11L10D30-I6T2G	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXX	-	S-11L10D31-I6T2G	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXY	-	S-11L10D32-I6T2G	LVR-IC	LDO, 3.2V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TXZ	-	S-11L10D33-I6T2G	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	SNT-6A	35vr4	VR4	7g	Sii
TY	-	μPA1902TE	n-MOSFET	V-MOS, LogL, 30V, ±7A, 200mW, <22mΩ(3.5A)	SC-95	33fc	-	7b	Nec
TY	-	74LVC1G97DW	CMOS-Log	Configurable multiple-function gate	SOT-363	33	Log41	7p	Di
TY	-	74LVC1G97W6	CMOS-Log	Configurable multiple-function gate	SOT-26	33	Log41	7p	Di
U0	-	R1131D301D	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
U0	-	R1163D301B	LVR-IC	LDO, 3.0V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
U0	-	R5323N031B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
U00	-	SN74AUC2G00DCT	CMOS-Log	Dual 2-input NAND gates	SSOP-8	47	Log50	8j	Ti
U00	-	SN74AUC2G00DCU	CMOS-Log	Dual 2-input NAND gates	VSSOP-8	55	Log50	8i	Ti
U02	-	SN74AUC2G02DCT	CMOS-Log	Dual 2-input NOR gates	SSOP-8	47	Log53	8j	Ti
U02	-	SN74AUC2G02DCU	CMOS-Log	Dual 2-input NOR gates	VSSOP-8	55	Log53	8i	Ti
U04	-	74HC3GU04DP	CMOS-Log	Triple inverters	SOT505-2	47	Log56	8d	Nxp
U04	-	KIC7WU04FK	CMOS-Log	Triple inverters	US8	47	Log56	8c	Kec
U04	-	SN74AUC2G04DBV	CMOS-Log	Dual inverters	SOT-23-6	33	Log24	7d	Ti
U04	-	XC74WLU04ASR	CMOS-Log	Triple unbuffered inverters	MSOP-8B	a6	Log56	8d	Tor
U06	-	SN74AUC2G06DBV	CMOS-Log	Dual inverter buffers/drivers (ODO)	SOT-23-6	33	Log25	7d	Ti
U07	-	SN74AUC2G07DBV	CMOS-Log	Dual noninverting buffers/drivers (ODO)	SOT-23-6	33	Log26	7d	Ti
U08	-	SN74AUC2G08DCT	CMOS-Log	Dual 2-input AND gates	SSOP-8	47	Log51	8j	Ti
U08	-	SN74AUC2G08DCU	CMOS-Log	Dual 2-input AND gates	VSSOP-8	55	Log51	8i	Ti
U1	-	R1131D311D	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
U1	-	R1163D311B	LVR-IC	LDO, 3.1V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
U1	-	R5323N032B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
U2	-	R1131D321D	LVR-IC	LDO, 3.2V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
U2	-	R1163D321B	LVR-IC	LDO, 3.2V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
U2	-	R5323N033B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
U2	-	SN74AUC2G241DCU	CMOS-Log	Dual bus buffer non-inverted with 3-state output	VSSOP-8	55	Log60	8i	Ti
U25	-	SN74AUC2G125DCT	CMOS-Log	Dual bus buffer with 3-state output	SSOP-8	47	Log54	8j	Ti
U25	-	SN74AUC2G125DCU	CMOS-Log	Dual bus buffer with 3-state output	VSSOP-8	55	Log54	8i	Ti
U26	-	SN74AUC2G126DCT	CMOS-Log	Bus buffer gate with 3-state output	SSOP-8	47	Log13	8j	Ti
U3	-	R1131D331D	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
U3	-	R1163D331B	LVR-IC	LDO, 3.3V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
U3	-	R5323N034B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
U32	-	SN74AUC2G32DCT	CMOS-Log	Dual 2-input OR gates	SSOP-8	47	Log52	8j	Ti
U32	-	SN74AUC2G32DCU	CMOS-Log	Dual 2-input OR gates	VSSOP-8	55	Log52	8i	Ti
U34	-	74HCT3G34DC	CMOS-Log	Triple non-inverter buffers	SOT765-1	55	Log69	8d	Nxp
U34	-	SN74AUC2G34DBV	CMOS-Log	Dual non-inverter buffers	SOT-23-6	33	Log23	7d	Ti
U4	-	R1163D341B	LVR-IC	LDO, 3.4V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
U4	-	R5323N035B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
U40	-	SN74AUC2G240DCT	CMOS-Log	Dual bus buffer inverted with 3-state output	SSOP-8	47	Log67	8j	Ti
U41	-	SN74AUC2G241DCT	CMOS-Log	Dual bus buffer non-inverted with 3-state output	SSOP-8	47	Log60	8j	Ti
U5	-	R1163D351B	LVR-IC	LDO, 3.5V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
U5	-	R5323N036B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
U6	-	R1163D361B	LVR-IC	LDO, 3.6V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
U6	-	R5323N011B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
U66	-	SN74AUC2G66DCT	CMOS-Log	2-channel analog switch	SSOP-8	47	Log68	8j	Ti
U66	-	SN74AUC2G66DCU	CMOS-Log	2-channel analog switch	VSSOP-8	55	Log68	8i	Ti
U7	-	R1163D371B	LVR-IC	LDO, 3.7V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
U7	-	R5323N037B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
U74	-	SN74AUP1G74DCT	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	SSOP-8	47	Log59	8j	Ti
U79	-	SN74AUC2G79DCT	CMOS-Log	Dual positive-edge triggered D-type flip-flop	SSOP-8	47	Log63	8j	Ti
U79	-	SN74AUC2G79DCU	CMOS-Log	Dual positive-edge triggered D-type flip-flop	VSSOP-8	55	Log63	8i	Ti
U8	-	R1163D381B	LVR-IC	LDO, 3.8V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
U8	-	R5323N038B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U80	-	SN74AUC2G80DCT	CMOS-Log	Dual positive-edge triggered D-type flip-flop	SSOP-8	47	Log64	8j	Ti
U86	-	SN74AUC2G86DCT	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	SSOP-8	47	Log65	8j	Ti
U86	-	SN74AUC2G86DCU	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	VSSOP-8	55	Log65	8i	Ti
U9	-	R1163D391B	LVR-IC	LDO, 3.9V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
U9	-	R5323N039B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
U9	-	SN74AUC2G34DCK	CMOS-Log	Dual non-inverter buffers	SC-70-6	33	Log23	7d	Ti
U9	-	SN74AUC2G34DRL	CMOS-Log	Dual non-inverter buffers	SOT-563-6	35	Log23	7d	Ti
UA	-	R5323N040B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UA	-	XC6604B051MR-G	LVR-IC	LDO, 0.5V±15mV, 1A, +CE	SOT-26W	aw	VR11a	7d	Tor
UB	-	R5323N041B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UB	-	TWG4148CD-126W	Si-diode	Quad, Sw, 85V, 100mA, Vf<1.2V(100mA), <4pF	SOT-23-6	33	D6	7b	Ttr
UB	-	TWG4148CD-126WS	Si-diode	Quad, Sw, 85V, 100mA, Vf<1.2V(100mA), <4pF	SOT-363	33	D6	7b	Ttr
UB	-	TWG4148CD-126WT	Si-diode	Quad, Sw, 85V, 100mA, Vf<1.2V(100mA), <3pF	SOT-563	35	D6	7b	Ttr
UB	-	XC6604B061MR-G	LVR-IC	LDO, 0.6V±15mV, 1A, +CE	SOT-26W	aw	VR11a	7d	Tor
UC	-	R5323N042B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UC	-	SN74AUC2G04DCK	CMOS-Log	Dual inverters	SC-70-6	33	Log24	7d	Ti
UC	-	XC6604B071MR-G	LVR-IC	LDO, 0.7V±15mV, 1A, +CE	SOT-26W	aw	VR11a	7d	Tor
UD	-	R5323N024B	LVR-IC	LDO, Dual out, Vout1/Vout2=3V/3.1V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UD	-	SN74AUC2GU04DCK	CMOS-Log	Dual inverters	SC-70-6	33	Log24	7d	Ti
UD	-	XC6604B081MR-G	LVR-IC	LDO, 0.8V±15mV, 1A, +CE	SOT-26W	aw	VR11a	7d	Tor
UE	-	R5323N025B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UE	-	XC6604B091MR-G	LVR-IC	LDO, 0.9V±15mV, 1A, +CE	SOT-26W	aw	VR11a	7d	Tor
UF	-	R5323N028B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UG	-	R5323N001A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
UH	-	R5323N043B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UH	-	XC6604B111MR-G	LVR-IC	LDO, 1.1V±15mV, 1A, +CE	SOT-26W	aw	VR11a	7d	Tor
UJ	-	R5323N044B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UK	-	R5323N045B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UK	-	SN74AUC2G240DCU	CMOS-Log	Dual bus buffer inverted with 3-state output	VSSOP-8	55	Log67	8i	Ti
UK	-	XC6604B121MR-G	LVR-IC	LDO, 1.2V±15mV, 1A, +CE	SOT-26W	aw	VR11a	7d	Tor
UL	-	R5323N046B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UL	-	XC6604B131MR-G	LVR-IC	LDO, 1.3V±20mV, 1A, +CE	SOT-26W	aw	VR11a	7d	Tor
UM	-	R5323N047B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UM	-	XC6604B141MR-G	LVR-IC	LDO, 1.4V±20mV, 1A, +CE	SOT-26W	aw	VR11a	7d	Tor
UN	-	R5323N011A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
UN	-	SN74AUC2G126DCU	CMOS-Log	Bus buffer gate with 3-state output	VSSOP-8	55	Log13	8i	Ti
UN	-	XC6604B151MR-G	LVR-IC	LDO, 1.5V±20mV, 1A, +CE	SOT-26W	aw	VR11a	7d	Tor
UP	-	R5323N048B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UP	-	SN74AUP1G74DCU	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	VSSOP-8	55	Log59	8i	Ti
UP	-	XC6604B161MR-G	LVR-IC	LDO, 1.6V±20mV, 1A, +CE	SOT-26W	aw	VR11a	7d	Tor
UQ	-	R5323N049B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UR	-	R5323N050B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UR	-	XC6604B171MR-G	LVR-IC	LDO, 1.7V±20mV, 1A, +CE	SOT-26W	aw	VR11a	7d	Tor
URA	-	S-1731A1212-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43yf	VR19	7ga	Sii
URB	-	S-1731A2815-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43yf	VR19	7ga	Sii
URC	-	S-1731A2818-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43yf	VR19	7ga	Sii
URD	-	S-1731A2828-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43yf	VR19	7ga	Sii
URE	-	S-1731A2830-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43yf	VR19	7ga	Sii
URF	-	S-1731A2833-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43yf	VR19	7ga	Sii
URG	-	S-1731A3018-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43yf	VR19	7ga	Sii
URH	-	S-1731A3033-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±1.0%, 300mA, +CE, CL, PDR	HSNT-6A	43yf	VR19	7ga	Sii
URI	-	S-1731A3333-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1.0%, 300mA, +CE, PDR	HSNT-6A	43yf	VR19	7ga	Sii
US	-	R5323N051B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
US	-	XC6604B181MR-G	LVR-IC	LDO, 1.8V±20mV, 1A, +CE	SOT-26W	aw	VR11a	7d	Tor
UT	-	R5323N052B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UT	-	SN74AUC2G06DCK	CMOS-Log	Dual inverter buffers/drivers (ODO)	SC-70-6	33	Log25	7d	Ti
UTA	-	S-1731C2815-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1.0%, 300mA, +CE, PDR	HSNT-6A	43yf	VR19	7ga	Sii
UTB	-	S-1731C2818-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1.0%, 300mA, +CE, PDR	HSNT-6A	43yf	VR19	7ga	Sii
UTC	-	S-1731C2828-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1.0%, 300mA, +CE, PDR	HSNT-6A	43yf	VR19	7ga	Sii
UTD	-	S-1731C2830-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1.0%, 300mA, +CE, PDR	HSNT-6A	43yf	VR19	7ga	Sii
UTE	-	S-1731C2833-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1.0%, 300mA, +CE, PDR	HSNT-6A	43yf	VR19	7ga	Sii
UTF	-	S-1731C3018-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1.0%, 300mA, +CE, PDR	HSNT-6A	43yf	VR19	7ga	Sii
UTG	-	S-1731C3033-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±1.0%, 300mA, +CE, PDR	HSNT-6A	43yf	VR19	7ga	Sii
UTH	-	S-1731C3333-A6T1y	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1.0%, 300mA, +CE, PDR	HSNT-6A	43yf	VR19	7ga	Sii
UU	-	R5323N053B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UU4	-	SN74AUC2GU04DBV	CMOS-Log	Dual inverters	SOT-23-6	33	Log24	7d	Ti
UV	-	R5323N054A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
UV	-	SN74AUC2G07DCK	CMOS-Log	Dual noninverting buffers/drivers (ODO)	SC-70-6	33	Log26	7d	Ti
UW	-	R5323N054B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
UX	-	SN74AUC2G80DCU	CMOS-Log	Dual positive-edge triggered D-type flip-flop	VSSOP-8	55	Log64	8i	Ti



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V0	-	R1131D181D5	LVR-IC	LDO, 1.85V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
V0	-	R1163D401B	LVR-IC	LDO, 4.0V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
V00	-	74LVC2G00DC	CMOS-Log	Dual 2-input NAND gates	SOT765-1	55	Log50	8d	Nxp
V02	-	74LVC2G02DC	CMOS-Log	Dual 2-input NOR gates	SOT765-1	55	Log53	8d	Nxp
V02	-	74LVC2G02DP	CMOS-Log	Dual 2-input NOR gates	SOT505-2	47	Log53	8d	Nxp
V04	-	74LVC2G04GV	CMOS-Log	Dual inverters	SOT-457	33	Log24	7b	Nxp
V04	-	74LVC3G04DC	CMOS-Log	Triple inverters	SOT765-1	55	Log56	8d	Nxp
V04	-	74LVC3G04DP	CMOS-Log	Triple inverters	SOT505-2	47	Log56	8d	Nxp
V06	-	74LVC2G06GV	CMOS-Log	Dual inverter buffers/drivers (ODO)	SOT-457	33	Log25	7b	Nxp
V06	-	74LVC3G06DC	CMOS-Log	Triple inverters (ODO)	SOT765-1	55	Log72	8d	Nxp
V06	-	74LVC3G06DP	CMOS-Log	Triple inverters (ODO)	SOT505-2	47	Log72	8d	Nxp
V07	-	74LVC2G07GV	CMOS-Log	Dual noninverting buffers/drivers (ODO)	SOT-457	33	Log26	7b	Nxp
V07	-	74LVC3G07DC	CMOS-Log	Triple noninverting buffers/drivers (ODO)	SOT765-1	55	Log73	8d	Nxp
V07	-	74LVC3G07DP	CMOS-Log	Triple noninverting buffers/drivers (ODO)	SOT505-2	47	Log73	8d	Nxp
V08	-	74LVC2G08DC	CMOS-Log	Dual 2-input AND gates	SOT765-1	55	Log51	8d	Nxp
V1	-	NL17SZ374DF	CMOS-Log	Positive edge–triggered D-type flip-flop with 3-state output	SC-70-6	33	Log28	7m	Ons
V1	-	R1131D281D5	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
V1	-	R1163D181B5	LVR-IC	LDO, 1.85V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
V11	-	74LVC1G11GV	CMOS-Log	3-input AND gate	SOT-457	33	Log30	7b	Nxp
V125	-	74LVC2G125DP	CMOS-Log	Dual bus buffer with 3-state output	SOT505-2	47	Log54	8d	Nxp
V126	-	74LVC2G126DP	CMOS-Log	Dual bus buffer with 3-state output	SOT505-2	47	Log54	8d	Nxp
V14	-	74LVC2G14GV	CMOS-Log	Dual Schmitt-trigger inverter buffers	SOT-457	33	Log34	7b	Nxp
V14	-	74LVC3G14DC	CMOS-Log	Triple Schmitt-trigger inverters	SOT765-1	55	Log57	8d	Nxp
V14	-	74LVC3G14DP	CMOS-Log	Triple Schmitt-trigger inverters	SOT505-2	47	Log57	8d	Nxp
V17	-	74LVC3G17DC	CMOS-Log	Triple non-inverting Schmitt-trigger	SOT765-1	55	Log71	8d	Nxp
V17	-	74LVC3G17DP	CMOS-Log	Triple non-inverting Schmitt-trigger	SOT505-2	47	Log71	8d	Nxp
V18	-	74LVC1G18GV	CMOS-Log	Noninverting 1-of-2 demultiplexer with 3-state deselected output	SOT-457	33	Log44	7b	Nxp
V19	-	74LVC1G19GV	CMOS-Log	1-of-2 decoder/demultiplexer	SOT-457	33	Log47	7b	Nxp
V2	-	R1131D121D5	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, CL	SON-6	hq	VR4	7g	Ric
V2	-	R1163D281B5	LVR-IC	LDO, 2.85V±1.5%, 150mA, +CE, AE(mode)	SON-6	vrc	VR10	7g	Ric
V240	-	74LVC2G240DP	CMOS-Log	Dual bus buffer inverted with 3-state output	SOT505-2	47	Log67	8d	Nxp
V241	-	74LVC2G241DP	CMOS-Log	Dual bus buffer non-inverted with 3-state output	SOT505-2	47	Log60	8d	Nxp
V25	-	74LVC2G125DC	CMOS-Log	Dual bus buffer with 3-state output	SOT765-1	55	Log54	8d	Nxp
V26	-	74LVC2G126DC	CMOS-Log	Dual bus buffer with 3-state output	SOT765-1	55	Log55	8d	Nxp
V27	-	µPA834TF	Si-npn	Dual, VHF/UHF, 20V, 65(100)mA, B=75..150, 7GHz	SOT-363	33	T3	7b	Nec
V2G00	-	74LVC2G00DP	CMOS-Log	Dual 2-input NAND gates	SOT505-2	47	Log50	8d	Nxp
V2G08	-	74LVC2G08DP	CMOS-Log	Dual 2-input AND gates	SOT505-2	47	Log51	8d	Nxp
V2G38	-	74LVC2G38DP	CMOS-Log	Dual 2-input NAND gate (ODO)	SOT505-2	47	Log62	8d	Nxp
V32	-	74LVC2G32DC	CMOS-Log	Dual 2-input OR gates	SOT765-1	55	Log52	8d	Nxp
V32	-	74LVC2G32DP	CMOS-Log	Dual 2-input OR gates	SOT505-2	47	Log52	8d	Nxp
V34	-	µPA832TF	Si-npn	Dual, VHF/UHF, 20(9)V, 100(30)mA, B=100..145, 4.5GHz	SOT-363	33	T3	7b	Nec
V34	-	74LVC3G34DP	CMOS-Log	Triple non-inverter buffers	SOT505-2	47	Log69	8d	Nxp
V4	-	74LVC2G04GW	CMOS-Log	Dual inverters	SOT-363	33	Log24	7b	Nxp
V40	-	74LVC2G240DC	CMOS-Log	Dual bus buffer inverted with 3-state output	SOT765-1	55	Log67	8d	Nxp
V41	-	74LVC2G241DC	CMOS-Log	Dual bus buffer non-inverted with 3-state output	SOT765-1	55	Log60	8d	Nxp
V44	-	µPA833TF	Si-npn	Dual, VHF/UHF, 9V, 100(30)mA, B=100..145, 4.5GHz	SOT-363	33	T3	7b	Nec
V47	-	µPA836TF	Si-npn	Dual, VHF/UHF, 9V, 30(100)mA, B=75..150, 12GHz	SOT-363	33	T3	7b	Nec
V5	-	74LVC1T45GW	CMOS-Log	Dual supply translating transceiver with 3-state output	SOT-363	33	Log70	7b	Nxp
V53	-	74LVC1G53DC	CMOS-Log	2-channel analog multiplexer/demultiplexer	SOT765-1	55	Log58	8d	Nxp
V53	-	74LVC1G53DP	CMOS-Log	2-channel analog multiplexer/demultiplexer	SOT505-2	47	Log58	8d	Nxp
V53	-	74LVC2G53DC	CMOS-Log	2-channel analog multiplexer/demultiplexer	SOT765-1	55	Log58	8d	Nxp
V57	-	74LVC1G57GV	CMOS-Log	Configurable multiple-function gate	SOT-457	33	Log36	7b	Nxp
V58	-	74LVC1G58GV	CMOS-Log	Configurable multiple-function gate	SOT-457	33	Log37	7b	Nxp
V6	-	74LVC2G06GW	CMOS-Log	Dual inverter buffers/drivers (ODO)	SOT-363	33	Log25	7b	Nxp
V66	-	74LVC2G66DC	CMOS-Log	2-channel analog switch	SOT765-1	55	Log68	8d	Nxp
V66	-	74LVC2G66DP	CMOS-Log	2-channel analog switch	SOT505-2	47	Log68	8d	Nxp
V7	-	74LVC2G07GW	CMOS-Log	Dual noninverting buffers/drivers (ODO)	SOT-363	33	Log26	7b	Nxp
V74	-	74LVC1G74DC	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	SOT765-1	55	Log59	8d	Nxp
V74	-	74LVC1G74DP	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	SOT505-2	47	Log59	8d	Nxp
V74	-	74LVC2G74DC	CMOS-Log	D-type flip-flop with preset and clear	SOT765-1	55	Log59	8d	Nxp
V74	-	74LVC2G74DP	CMOS-Log	D-type flip-flop with preset and clear	SOT505-2	47	Log59	8d	Nxp
V75	-	74LVC1G175GV	CMOS-Log	Positive edge-triggered D-type flip-flop with reset	SOT-457	33	Log40	7b	Nxp
V831	-	ADCV0831M6	A/D-IC	8 Bit serial I/O low voltage ADC	SOT-23-6	33	-	7b	Nsc
V86	-	74LVC2G86DC	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	SOT765-1	55	Log65	8d	Nxp
V86	-	74LVC2G86DP	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	SOT505-2	47	Log65	8d	Nxp
V99	-	74LVC1G99DP	CMOS-Log	Ultra-configurable multiple function gate with 3-state output	SOT505-2	47	Log84	8d	Nxp
VA2	-	S-1135C34-A6T1S	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VA3	-	S-1135C35-A6T1S	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAA	-	S-1135C10-A6T1S	LVR-IC	LDO, 1.0V±15mV, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAB	-	S-1135C11-A6T1S	LVR-IC	LDO, 1.1V±15mV, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VAC	-	S-1135C12-A6T1S	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAD	-	S-1135C13-A6T1S	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAE	-	S-1135C14-A6T1S	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAF	-	S-1135C15-A6T1S	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAG	-	S-1135C16-A6T1S	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAH	-	S-1135C17-A6T1S	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAI	-	S-1135C18-A6T1S	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAJ	-	S-1135C1J-A6T1S	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAK	-	S-1135C19-A6T1S	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAL	-	S-1135C20-A6T1S	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAM	-	S-1135C21-A6T1S	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAN	-	S-1135C22-A6T1S	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAO	-	S-1135C23-A6T1S	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAP	-	S-1135C24-A6T1S	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAQ	-	S-1135C25-A6T1S	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAR	-	S-1135C26-A6T1S	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAS	-	S-1135C27-A6T1S	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAT	-	S-1135C28-A6T1S	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAU	-	S-1135C2J-A6T1S	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAV	-	S-1135C29-A6T1S	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAW	-	S-1135C30-A6T1S	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAX	-	S-1135C31-A6T1S	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAY	-	S-1135C32-A6T1S	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VAZ	-	S-1135C33-A6T1S	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, PDR	HSNT-6A	43er	VR4	7g	Sii
VB2	-	S-1135D34-A6T1S	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VB3	-	S-1135D35-A6T1S	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBA	-	S-1135D10-A6T1S	LVR-IC	LDO, 1.0V±15mV, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBB	-	S-1135D11-A6T1S	LVR-IC	LDO, 1.1V±15mV, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBC	-	S-1135D12-A6T1S	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBD	-	S-1135D13-A6T1S	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBE	-	S-1135D14-A6T1S	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBF	-	S-1135D15-A6T1S	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBG	-	S-1135D16-A6T1S	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBH	-	S-1135D17-A6T1S	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBI	-	S-1135D18-A6T1S	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBJ	-	S-1135D1J-A6T1S	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBK	-	S-1135D19-A6T1S	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBL	-	S-1135D20-A6T1S	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBM	-	S-1135D21-A6T1S	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBN	-	S-1135D22-A6T1S	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBO	-	S-1135D23-A6T1S	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBP	-	S-1135D24-A6T1S	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBQ	-	S-1135D25-A6T1S	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBR	-	S-1135D26-A6T1S	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBS	-	S-1135D27-A6T1S	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBT	-	S-1135D28-A6T1S	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBU	-	S-1135D2J-A6T1S	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBV	-	S-1135D29-A6T1S	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBW	-	S-1135D30-A6T1S	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBX	-	S-1135D31-A6T1S	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBY	-	S-1135D32-A6T1S	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VBZ	-	S-1135D33-A6T1S	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE	HSNT-6A	43er	VR4	7g	Sii
VH2	-	S-1137A34-I6T2G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VH3	-	S-1137A35-I6T2G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHC	-	S-1137A12-I6T2G	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHD	-	S-1137A13-I6T2G	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHE	-	S-1137A14-I6T2G	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHF	-	S-1137A15-I6T2G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHG	-	S-1137A16-I6T2G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHH	-	S-1137A17-I6T2G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHI	-	S-1137A18-I6T2G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHJ	-	S-1137A1J-I6T2G	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHK	-	S-1137A19-I6T2G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHL	-	S-1137A20-I6T2G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHM	-	S-1137A21-I6T2G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHN	-	S-1137A22-I6T2G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHO	-	S-1137A23-I6T2G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHP	-	S-1137A24-I6T2G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHQ	-	S-1137A25-I6T2G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHR	-	S-1137A26-I6T2G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VHS	-	S-1137A27-I6T2G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHT	-	S-1137A28-I6T2G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHU	-	S-1137A2J-I6T2G	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHV	-	S-1137A29-I6T2G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHW	-	S-1137A30-I6T2G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHX	-	S-1137A31-I6T2G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHY	-	S-1137A32-I6T2G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VHZ	-	S-1137A33-I6T2G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, CL, PDR	SNT-6A	35et	VR7	7g	Sii
VI2	-	S-1137B34-I6T2G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VI3	-	S-1137B35-I6T2G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIC	-	S-1137B12-I6T2G	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VID	-	S-1137B13-I6T2G	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIE	-	S-1137B14-I6T2G	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIF	-	S-1137B15-I6T2G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIG	-	S-1137B16-I6T2G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIH	-	S-1137B17-I6T2G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VII	-	S-1137B18-I6T2G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIJ	-	S-1137B1J-I6T2G	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIK	-	S-1137B19-I6T2G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIL	-	S-1137B20-I6T2G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIM	-	S-1137B21-I6T2G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIN	-	S-1137B22-I6T2G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIO	-	S-1137B23-I6T2G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIP	-	S-1137B24-I6T2G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIQ	-	S-1137B25-I6T2G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIR	-	S-1137B26-I6T2G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIS	-	S-1137B27-I6T2G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIT	-	S-1137B28-I6T2G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIU	-	S-1137B2J-I6T2G	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIV	-	S-1137B29-I6T2G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIW	-	S-1137B30-I6T2G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIX	-	S-1137B31-I6T2G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIY	-	S-1137B32-I6T2G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VIZ	-	S-1137B33-I6T2G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, CL	SNT-6A	35et	VR7	7g	Sii
VJ2	-	S-1137C34-I6T2G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJ3	-	S-1137C35-I6T2G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJC	-	S-1137C12-I6T2G	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJD	-	S-1137C13-I6T2G	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJE	-	S-1137C14-I6T2G	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJF	-	S-1137C15-I6T2G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJG	-	S-1137C16-I6T2G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJH	-	S-1137C17-I6T2G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJI	-	S-1137C18-I6T2G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJJ	-	S-1137C1J-I6T2G	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJK	-	S-1137C19-I6T2G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJL	-	S-1137C20-I6T2G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJM	-	S-1137C21-I6T2G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJN	-	S-1137C22-I6T2G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJO	-	S-1137C23-I6T2G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJP	-	S-1137C24-I6T2G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJQ	-	S-1137C25-I6T2G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJR	-	S-1137C26-I6T2G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJS	-	S-1137C27-I6T2G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJT	-	S-1137C28-I6T2G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJU	-	S-1137C2J-I6T2G	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJV	-	S-1137C29-I6T2G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJW	-	S-1137C30-I6T2G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJX	-	S-1137C31-I6T2G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJY	-	S-1137C32-I6T2G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VJZ	-	S-1137C33-I6T2G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, PDR	SNT-6A	35et	VR7	7g	Sii
VK	-	74LVC2G14GW	CMOS-Log	Dual Schmitt-trigger inverter buffers	SOT-363	33	Log34	7b	Nxp
VK2	-	S-1137D34-I6T2G	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VK3	-	S-1137D35-I6T2G	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKC	-	S-1137D12-I6T2G	LVR-IC	LDO, 1.2V±15mV, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKD	-	S-1137D13-I6T2G	LVR-IC	LDO, 1.3V±15mV, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKE	-	S-1137D14-I6T2G	LVR-IC	LDO, 1.4V±15mV, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKF	-	S-1137D15-I6T2G	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKG	-	S-1137D16-I6T2G	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKH	-	S-1137D17-I6T2G	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKI	-	S-1137D18-I6T2G	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VKJ	-	S-1137D1J-I6T2G	LVR-IC	LDO, 1.85V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKK	-	S-1137D19-I6T2G	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKL	-	S-1137D20-I6T2G	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKM	-	S-1137D21-I6T2G	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKN	-	S-1137D22-I6T2G	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKO	-	S-1137D23-I6T2G	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKP	-	S-1137D24-I6T2G	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKQ	-	S-1137D25-I6T2G	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKR	-	S-1137D26-I6T2G	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKS	-	S-1137D27-I6T2G	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKT	-	S-1137D28-I6T2G	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKU	-	S-1137D2J-I6T2G	LVR-IC	LDO, 2.85V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKV	-	S-1137D29-I6T2G	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKW	-	S-1137D30-I6T2G	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKX	-	S-1137D31-I6T2G	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKY	-	S-1137D32-I6T2G	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VKZ	-	S-1137D33-I6T2G	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE	SNT-6A	35et	VR7	7g	Sii
VU	-	74LVC1G11GW	CMOS-Log	3-input AND gate	SOT-363	33	Log30	7b	Nxp
VU04	-	74LVC3GU04DP	CMOS-Log	Triple inverters	SOT505-2	47	Log56	8d	Nxp
VU4	-	74LVC2GU04GV	CMOS-Log	Dual inverters	SOT-457	33	Log24	7b	Nxp
VU4	-	74LVC3GU04DC	CMOS-Log	Triple inverters	SOT765-1	55	Log56	8d	Nxp
VV	-	74LVC2G17GV	CMOS-Log	Dual Schmitt-trigger buffers	SOT-457	33	Log27	7b	Nxp
VV	-	74LVC2G17GW	CMOS-Log	Dual Schmitt-trigger buffers	SOT-363	33	Log27	7b	Nxp
VW	-	74LVC1G18GW	CMOS-Log	Noninverting 1-of-2 demultiplexer with 3-state deselected output	SOT-363	33	Log44	7b	Nxp
vX	-	µPA861TD	Si-npn	Dual, RF, (5V)9V, (30)35mA, (90)105mW, B=70..110, (12)20GHz	SON-6	33	T3	7b	Nec
VX	-	74LVC1GX04GW	CMOS-Log	X-tal oscillator driver	SOT-363	33	Log39	7b	Nxp
VX4	-	74LVC1GX04GV	CMOS-Log	X-tal oscillator driver	SOT-457	33	Log39	7b	Nxp
VY	-	74LVC1G19GW	CMOS-Log	1-of-2 decoder/demultiplexer	SOT-363	33	Log47	7b	Nxp
W1	-	BZX84C2V4TW	Z-diode	Triple, 2.35..2.45V, Zzt=100Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
W1	-	HD74LV1GW98ACM	CMOS-Log	Configurable multiple-function gate	CMPAK-6	33	Log43	7f	Ren
W1	-	R5325N001B	LVR-IC	LDO, Dual out, Vout1/Vout2=2V/2V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
W10	-	FMW10	Si-npn	Dual, HF, 30V, 50mA, 300mW, B=27..270, 1.5GHz	SC-74	33	T11	7b	Rhm
W10	-	UMW10N	Si-npn	Dual, HF, 30V, 50mA, 300mW, B=27..270, 1.5GHz	SC-88	33	T11	7b	Rhm
W1s	-	BCR10PN	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 250mW, R1/R2=10k/10k	SOT-363	33	TD2	7l	Inf
W2	-	BZX84C2V7TW	Z-diode	Triple, 2.64..2.75V, Zzt=100Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
W2	-	HD74LV1GW97ACM	CMOS-Log	Configurable multiple-function gate	CMPAK-6	33	Log41	7f	Ren
W2	-	R5325N002B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
W20	-	TK11120M	LVR-IC	LDO, 2.0V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W21	-	TK11121M	LVR-IC	LDO, 2.1V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W23	-	TK11123M	LVR-IC	LDO, 2.3V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W24	-	TK11124M	LVR-IC	LDO, 2.4V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W25	-	TK11125M	LVR-IC	LDO, 2.5V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W26	-	TK11126M	LVR-IC	LDO, 2.6V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W27	-	TK11127M	LVR-IC	LDO, 2.7V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W28	-	TK11128M	LVR-IC	LDO, 2.8V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W29	-	TK11129M	LVR-IC	LDO, 2.9V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W3	-	BZX84C3V0TW	Z-diode	Triple, 2.94..3.06V, Zzt=95Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
W3	-	R5325N003B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
W30	-	TK11130M	LVR-IC	LDO, 3.0V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W31	-	TK11131M	LVR-IC	LDO, 3.1V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W32	-	TK11132M	LVR-IC	LDO, 3.2V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W33	-	TK11133M	LVR-IC	LDO, 3.3V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W34	-	TK11134M	LVR-IC	LDO, 3.4V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W35	-	TK11135M	LVR-IC	LDO, 3.5V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W36	-	TK11136M	LVR-IC	LDO, 3.6V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W37	-	TK11137M	LVR-IC	LDO, 3.7V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W38	-	TK11138M	LVR-IC	LDO, 3.8V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W39	-	TK11139M	LVR-IC	LDO, 3.9V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W4	-	BZX84C3V3TW	Z-diode	Triple, 3.23..3.37V, Zzt=95Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
W4	-	R5325N004B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
W40	-	TK11140M	LVR-IC	LDO, 4.0V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W41	-	TK11141M	LVR-IC	LDO, 4.1V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W42	-	TK11142M	LVR-IC	LDO, 4.2V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W43	-	TK11143M	LVR-IC	LDO, 4.3V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W44	-	TK11144M	LVR-IC	LDO, 4.4V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W45	-	TK11145M	LVR-IC	LDO, 4.5V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W46	-	TK11146M	LVR-IC	LDO, 4.6V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W47	-	TK11147M	LVR-IC	LDO, 4.7V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W48	-	TK11148M	LVR-IC	LDO, 4.8V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W49	-	TK11149M	LVR-IC	LDO, 4.9V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
W5	-	BZX84C3V6TW	Z-diode	Triple, 3.52..3.67V, Zzt=90Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
W5	-	HD74LV1GW04ACM	CMOS-Log	Dual inverters	CMPAK-6	33	Log24	7f	Ren
W5	-	R1163D151D	LVR-IC	LDO, 1.5V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
W5	-	R5325N005B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
W50	-	TK11150M	LVR-IC	LDO, 5.0V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
W6	-	BZX84C3V9TW	Z-diode	Triple, 3.82..3.98V, Zzt=90Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
W6	-	HD74LV1GWU04ACM	CMOS-Log	Dual inverters	CMPAK-6	33	Log24	7f	Ren
W6	-	R1163D161D	LVR-IC	LDO, 1.6V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
W6	-	R5325N006B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
W7	-	BZX84C4V3TW	Z-diode	Triple, 4.21..4.39V, Zzt=90Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
W7	-	R1163D171D	LVR-IC	LDO, 1.7V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
W7	-	R5325N007B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
W8	-	BZX84C4V7TW	Z-diode	Triple, 4.61..4.79V, Zzt=80Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
W8	-	R1163D181D	LVR-IC	LDO, 1.8V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
W8	-	R5325N008B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
W9	-	BZX84C5V1TW	Z-diode	Triple, 5.0..5.20V, Zzt=60Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
W9	-	R1163D191D	LVR-IC	LDO, 1.9V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
W9	-	R5325N009B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
W92	-	TK11122M	LVR-IC	LDO, 2.2V±1.5%, 200mA, -CE	SOT-23L-6	33up	-	7b	Tok
WA	-	BZX84C5V6TW	Z-diode	Triple, 5.49..5.71V, Zzt=40Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WA	-	HD74LV1GW14ACM	CMOS-Log	Dual Schmitt-trigger inverter buffers	CMPAK-6	33	Log34	7f	Ren
WA	-	R5325N010B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WB	-	BZX84C6V2TW	Z-diode	Triple, 6.08..6.32V, Zzt=10Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WB	-	R5325N011B	LVR-IC	LDO, Dual out, Vout1/Vout2=3V/3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WC	-	BZX84C6V8TW	Z-diode	Triple, 6.66..6.94V, Zzt=15Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WC	-	R5325N012B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WD	-	BZX84C7V5TW	Z-diode	Triple, 7.35..7.65V, Zzt=15Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WD	-	HD74LV1GW06ACM	CMOS-Log	Dual inverter buffers/drivers (ODO)	CMPAK-6	33	Log25	7f	Ren
WD	-	R5325N013B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WE	-	BZX84C8V2TW	Z-diode	Triple, 8.04..8.36V, Zzt=15Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WE	-	HD74LV1GW07ACM	CMOS-Log	Dual noninverting buffers/drivers (ODO)	CMPAK-6	33	Log26	7f	Ren
WE	-	R5325N016B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WF	-	BZX84C9V1TW	Z-diode	Triple, 8.92..9.28V, Zzt=15Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WF	-	R5325N017B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WFs	-	BCR08PN	Si-n/p-Digi	Dual, Sw, 50V, 100mA, 250mW, R1/R2=2k2/47k	SOT-363	33	TD2	7l	Inf
WG	-	BZX84C10TW	Z-diode	Triple, 9.80..10.20V, Zzt=20Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WG	-	R5325N014B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WH	-	BZX84C11TW	Z-diode	Triple, 10.78..11.22V, Zzt=20Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WH	-	R5325N015B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WHs	-	BCR108S	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k, 170MHz	SOT-363	33	TD3	7l	Inf
WI	-	BZX84C12TW	Z-diode	Triple, 11.76..12.24V, Zzt=25Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WJ	-	BZX84C14TW	Z-diode	Triple, 13.72..14.28V, Zzt=30Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WJ	-	HD74LV1GW16ACM	CMOS-Log	Dual noniverting buffers	CMPAK-6	33	Log23	7f	Ren
WJ	-	R5325N018B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WJ1	-	S-1315A42-A6T2U3	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJ2	-	S-1315A34-A6T2U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJ3	-	S-1315A35-A6T2U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJ4	-	S-1315A36-A6T2U3	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJ5	-	S-1315A37-A6T2U3	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJ6	-	S-1315A38-A6T2U3	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJ7	-	S-1315A39-A6T2U3	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJ8	-	S-1315A40-A6T2U3	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJ9	-	S-1315A41-A6T2U3	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJA	-	S-1315A10-A6T2U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJB	-	S-1315A11-A6T2U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJC	-	S-1315A12-A6T2U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJD	-	S-1315A13-A6T2U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJE	-	S-1315A14-A6T2U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJF	-	S-1315A15-A6T2U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJG	-	S-1315A16-A6T2U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJH	-	S-1315A17-A6T2U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJI	-	S-1315A18-A6T2U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJJ	-	S-1315A1J-A6T2U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJK	-	S-1315A19-A6T2U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJL	-	S-1315A20-A6T2U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJM	-	S-1315A21-A6T2U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJN	-	S-1315A22-A6T2U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJO	-	S-1315A23-A6T2U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJP	-	S-1315A24-A6T2U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJQ	-	S-1315A25-A6T2U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
WJR	-	S-1315A26-A6T2U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJS	-	S-1315A27-A6T2U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJT	-	S-1315A28-A6T2U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJU	-	S-1315A2J-A6T2U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJV	-	S-1315A29-A6T2U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJW	-	S-1315A30-A6T2U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJX	-	S-1315A31-A6T2U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJY	-	S-1315A32-A6T2U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WJZ	-	S-1315A33-A6T2U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL, PDR	HSNT-6	35er	VR4	7g	Sii
WK	-	BZX84C13TW	Z-diode	Triple, 12.74..13.26V, Zzt=30Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WK	-	HD74LV1GW17ACM	CMOS-Log	Dual Schmitt-trigger inverter buffers	CMPAK-6	33	Log34	7f	Ren
WK	-	R5325N019B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WK1	-	S-1315B42-A6T2U3	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WK2	-	S-1315B34-A6T2U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WK3	-	S-1315B35-A6T2U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WK4	-	S-1315B36-A6T2U3	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WK5	-	S-1315B37-A6T2U3	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WK6	-	S-1315B38-A6T2U3	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WK7	-	S-1315B39-A6T2U3	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WK8	-	S-1315B40-A6T2U3	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WK9	-	S-1315B41-A6T2U3	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKA	-	S-1315B10-A6T2U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKB	-	S-1315B11-A6T2U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKC	-	S-1315B12-A6T2U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKD	-	S-1315B13-A6T2U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKE	-	S-1315B14-A6T2U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKF	-	S-1315B15-A6T2U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKG	-	S-1315B16-A6T2U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKH	-	S-1315B17-A6T2U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKI	-	S-1315B18-A6T2U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKJ	-	S-1315B1J-A6T2U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKK	-	S-1315B19-A6T2U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKL	-	S-1315B20-A6T2U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKM	-	S-1315B21-A6T2U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKN	-	S-1315B22-A6T2U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKO	-	S-1315B23-A6T2U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKP	-	S-1315B24-A6T2U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKQ	-	S-1315B25-A6T2U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKR	-	S-1315B26-A6T2U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKs	-	BCR119S	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4.7k, 150MHz	SOT-363	33	TD3	7l	Inf
WKS	-	S-1315B27-A6T2U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKT	-	S-1315B28-A6T2U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKU	-	S-1315B2J-A6T2U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKV	-	S-1315B29-A6T2U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKW	-	S-1315B30-A6T2U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKX	-	S-1315B31-A6T2U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKY	-	S-1315B32-A6T2U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WKZ	-	S-1315B33-A6T2U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	HSNT-6	35er	VR4	7g	Sii
WL	-	BZX84C15TW	Z-diode	Triple, 14.70..15.30V, Zzt=30Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WL	-	R5325N020B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WL1	-	S-1315C42-A6T2U3	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WL2	-	S-1315C34-A6T2U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WL3	-	S-1315C35-A6T2U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WL4	-	S-1315C36-A6T2U3	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WL5	-	S-1315C37-A6T2U3	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WL6	-	S-1315C38-A6T2U3	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WL7	-	S-1315C39-A6T2U3	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WL8	-	S-1315C40-A6T2U3	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WL9	-	S-1315C41-A6T2U3	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLA	-	S-1315C10-A6T2U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLB	-	S-1315C11-A6T2U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLC	-	S-1315C12-A6T2U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLD	-	S-1315C13-A6T2U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLE	-	S-1315C14-A6T2U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLF	-	S-1315C15-A6T2U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLG	-	S-1315C16-A6T2U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLH	-	S-1315C17-A6T2U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLI	-	S-1315C18-A6T2U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLJ	-	S-1315C1J-A6T2U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLK	-	S-1315C19-A6T2U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
WLL	-	S-1315C20-A6T2U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLM	-	S-1315C21-A6T2U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLN	-	S-1315C22-A6T2U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLO	-	S-1315C23-A6T2U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLP	-	S-1315C24-A6T2U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLQ	-	S-1315C25-A6T2U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLR	-	S-1315C26-A6T2U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLS	-	S-1315C27-A6T2U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLT	-	S-1315C28-A6T2U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLU	-	S-1315C2J-A6T2U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLV	-	S-1315C29-A6T2U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLW	-	S-1315C30-A6T2U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLX	-	S-1315C31-A6T2U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLY	-	S-1315C32-A6T2U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WLZ	-	S-1315C33-A6T2U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, PDR	HSNT-6	35er	VR4	7g	Sii
WM	-	BZX84C16TW	Z-diode	Triple, 15.68..16.32V, Zzt=40Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WM	-	R5325N021B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WM1	-	S-1315D42-A6T2U3	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WM2	-	S-1315D34-A6T2U3	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WM3	-	S-1315D35-A6T2U3	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WM4	-	S-1315D36-A6T2U3	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WM5	-	S-1315D37-A6T2U3	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WM6	-	S-1315D38-A6T2U3	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WM7	-	S-1315D39-A6T2U3	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WM8	-	S-1315D40-A6T2U3	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WM9	-	S-1315D41-A6T2U3	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMA	-	S-1315D10-A6T2U3	LVR-IC	LDO, 1.0V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMB	-	S-1315D11-A6T2U3	LVR-IC	LDO, 1.1V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMC	-	S-1315D12-A6T2U3	LVR-IC	LDO, 1.2V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMD	-	S-1315D13-A6T2U3	LVR-IC	LDO, 1.3V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WME	-	S-1315D14-A6T2U3	LVR-IC	LDO, 1.4V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMF	-	S-1315D15-A6T2U3	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMG	-	S-1315D16-A6T2U3	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMH	-	S-1315D17-A6T2U3	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMI	-	S-1315D18-A6T2U3	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMJ	-	S-1315D1J-A6T2U3	LVR-IC	LDO, 1.85V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMK	-	S-1315D19-A6T2U3	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WML	-	S-1315D20-A6T2U3	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMM	-	S-1315D21-A6T2U3	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMN	-	S-1315D22-A6T2U3	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMO	-	S-1315D23-A6T2U3	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMP	-	S-1315D24-A6T2U3	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMQ	-	S-1315D25-A6T2U3	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMR	-	S-1315D26-A6T2U3	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMS	-	S-1315D27-A6T2U3	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMT	-	S-1315D28-A6T2U3	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMU	-	S-1315D2J-A6T2U3	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMV	-	S-1315D29-A6T2U3	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMW	-	S-1315D30-A6T2U3	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMX	-	S-1315D31-A6T2U3	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMY	-	S-1315D32-A6T2U3	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WMZ	-	S-1315D33-A6T2U3	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	HSNT-6	35er	VR4	7g	Sii
WN	-	BZX84C18TW	Z-diode	Triple, 17.64..18.36V, Zzt=45Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WN	-	R5325N022B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WO	-	BZX84C20TW	Z-diode	Triple, 19.60..20.40V, Zzt=55Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WP	-	BZX84C22TW	Z-diode	Triple, 21.56..22.44V, Zzt=55Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WP	-	HD74LV1GW53ACM	CMOS-Log	2-channel analog multiplexer/demultiplexer	CMPAK-6	33	Log38	7f	Ren
WP	-	R5325N023B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WQ	-	R5325N024B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WR	-	BZX84C24TW	Z-diode	Triple, 23.52..24.48V, Zzt=70Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WR	-	HD74LV1GW57ACM	CMOS-Log	Configurable multiple-function gate	CMPAK-6	33	Log36	7f	Ren
WR	-	R5325N025B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WR2	-	S-13A1A33-A6T1U3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WR3	-	S-13A1A34-A6T1U3	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WR4	-	S-13A1A35-A6T1U3	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WR5	-	S-13A1A1C-A6T1U3	LVR-IC	LDO, 1.25V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRB	-	S-13A1A10-A6T1U3	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRC	-	S-13A1A11-A6T1U3	LVR-IC	LDO, 1.1V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRD	-	S-13A1A12-A6T1U3	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRE	-	S-13A1A13-A6T1U3	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
WRF	-	S-13A1A14-A6T1U3	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRG	-	S-13A1A15-A6T1U3	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRH	-	S-13A1A16-A6T1U3	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRI	-	S-13A1A17-A6T1U3	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRJ	-	S-13A1A18-A6T1U3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRK	-	S-13A1A1J-A6T1U3	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRL	-	S-13A1A19-A6T1U3	LVR-IC	LDO, 1.9V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRM	-	S-13A1A20-A6T1U3	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRN	-	S-13A1A21-A6T1U3	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRO	-	S-13A1A22-A6T1U3	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRP	-	S-13A1A23-A6T1U3	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRQ	-	S-13A1A24-A6T1U3	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRR	-	S-13A1A25-A6T1U3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRS	-	S-13A1A26-A6T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRT	-	S-13A1A27-A6T1U3	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRU	-	S-13A1A28-A6T1U3	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRV	-	S-13A1A2J-A6T1U3	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRW	-	S-13A1A29-A6T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRX	-	S-13A1A30-A6T1U3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRY	-	S-13A1A31-A6T1U3	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WRZ	-	S-13A1A32-A6T1U3	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, PDR	HSNT-6A	43vr	VR4	7g	Sii
WS	-	BZX84C27TW	Z-diode	Triple, 26.46..27.54V, Zzt=80Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WS	-	R5325N026B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WS2	-	S-13A1B33-A6T1U3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WS3	-	S-13A1B34-A6T1U3	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WS4	-	S-13A1B35-A6T1U3	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WS5	-	S-13A1B1C-A6T1U3	LVR-IC	LDO, 1.25V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSB	-	S-13A1B10-A6T1U3	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSC	-	S-13A1B11-A6T1U3	LVR-IC	LDO, 1.1V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSD	-	S-13A1B12-A6T1U3	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSE	-	S-13A1B13-A6T1U3	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSF	-	S-13A1B14-A6T1U3	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSG	-	S-13A1B15-A6T1U3	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSH	-	S-13A1B16-A6T1U3	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSI	-	S-13A1B17-A6T1U3	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSJ	-	S-13A1B18-A6T1U3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSK	-	S-13A1B1J-A6T1U3	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSL	-	S-13A1B19-A6T1U3	LVR-IC	LDO, 1.9V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSM	-	S-13A1B20-A6T1U3	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSN	-	S-13A1B21-A6T1U3	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSO	-	S-13A1B22-A6T1U3	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSP	-	S-13A1B23-A6T1U3	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSQ	-	S-13A1B24-A6T1U3	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSR	-	S-13A1B25-A6T1U3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSS	-	S-13A1B26-A6T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WST	-	S-13A1B27-A6T1U3	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSU	-	S-13A1B28-A6T1U3	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSV	-	S-13A1B2J-A6T1U3	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSW	-	S-13A1B29-A6T1U3	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSX	-	S-13A1B30-A6T1U3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSY	-	S-13A1B31-A6T1U3	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WSZ	-	S-13A1B32-A6T1U3	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL	HSNT-6A	43vr	VR4	7g	Sii
WT	-	BZX84C30TW	Z-diode	Triple, 29.40..30.60V, Zzt=80Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WT	-	HD74LV1GW58ACM	CMOS-Log	Configurable multiple-function gate	CMPAK-6	33	Log37	7f	Ren
WT	-	R5325N027B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WT2	-	S-13A1C33-A6T1U3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WT3	-	S-13A1C34-A6T1U3	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WT4	-	S-13A1C35-A6T1U3	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WT5	-	S-13A1C1C-A6T1U3	LVR-IC	LDO, 1.25V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTB	-	S-13A1C10-A6T1U3	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTC	-	S-13A1C11-A6T1U3	LVR-IC	LDO, 1.1V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTD	-	S-13A1C12-A6T1U3	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTE	-	S-13A1C13-A6T1U3	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTF	-	S-13A1C14-A6T1U3	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTG	-	S-13A1C15-A6T1U3	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTH	-	S-13A1C16-A6T1U3	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTI	-	S-13A1C17-A6T1U3	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTJ	-	S-13A1C18-A6T1U3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTK	-	S-13A1C1J-A6T1U3	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTL	-	S-13A1C19-A6T1U3	LVR-IC	LDO, 1.9V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
WTM	-	S-13A1C20-A6T1U3	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTN	-	S-13A1C21-A6T1U3	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTO	-	S-13A1C22-A6T1U3	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTP	-	S-13A1C23-A6T1U3	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTQ	-	S-13A1C24-A6T1U3	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTR	-	S-13A1C25-A6T1U3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTS	-	S-13A1C26-A6T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTT	-	S-13A1C27-A6T1U3	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTU	-	S-13A1C28-A6T1U3	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTV	-	S-13A1C2J-A6T1U3	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTW	-	S-13A1C29-A6T1U3	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTX	-	S-13A1C30-A6T1U3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTY	-	S-13A1C31-A6T1U3	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WTZ	-	S-13A1C32-A6T1U3	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, PDR	HSNT-6A	43vr	VR4	7g	Sii
WU	-	BZX84C33TW	Z-diode	Triple, 32.34..33.66V, Zzt=80Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WU	-	R5325N028B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WU2	-	S-13A1D33-A6T1U3	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WU3	-	S-13A1D34-A6T1U3	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WU4	-	S-13A1D35-A6T1U3	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WU5	-	S-13A1D1C-A6T1U3	LVR-IC	LDO, 1.25V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUB	-	S-13A1D10-A6T1U3	LVR-IC	LDO, 1.0V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUC	-	S-13A1D11-A6T1U3	LVR-IC	LDO, 1.1V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUD	-	S-13A1D12-A6T1U3	LVR-IC	LDO, 1.2V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUE	-	S-13A1D13-A6T1U3	LVR-IC	LDO, 1.3V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUF	-	S-13A1D14-A6T1U3	LVR-IC	LDO, 1.4V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUG	-	S-13A1D15-A6T1U3	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUH	-	S-13A1D16-A6T1U3	LVR-IC	LDO, 1.6V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUI	-	S-13A1D17-A6T1U3	LVR-IC	LDO, 1.7V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUJ	-	S-13A1D18-A6T1U3	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUK	-	S-13A1D1J-A6T1U3	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUL	-	S-13A1D19-A6T1U3	LVR-IC	LDO, 1.9V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUM	-	S-13A1D20-A6T1U3	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUN	-	S-13A1D21-A6T1U3	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUO	-	S-13A1D22-A6T1U3	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUP	-	S-13A1D23-A6T1U3	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUQ	-	S-13A1D24-A6T1U3	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUR	-	S-13A1D25-A6T1U3	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUS	-	S-13A1D26-A6T1U3	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUT	-	S-13A1D27-A6T1U3	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUU	-	S-13A1D28-A6T1U3	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUV	-	S-13A1D2J-A6T1U3	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUW	-	S-13A1D29-A6T1U3	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUX	-	S-13A1D30-A6T1U3	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUY	-	S-13A1D31-A6T1U3	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WUZ	-	S-13A1D32-A6T1U3	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	HSNT-6A	43vr	VR4	7g	Sii
WV	-	R5325N029B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WW	-	BZX84C36TW	Z-diode	Triple, 35.28..36.72V, Zzt=90Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WW	-	R5325N030B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.45V/2.3V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WX	-	BZX84C39TW	Z-diode	Triple, 38.22..39.78V, Zzt=130Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WX	-	R5325N031B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WY	-	BZX84C43TW	Z-diode	Triple, 42.14..43.86V, Zzt=150Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WY	-	R5325N032B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
WZ	-	BZX84C47TW	Z-diode	Triple, 46.06..47.94V, Zzt=170Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
WZ	-	R5325N033B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
X0	-	R1163D201D	LVR-IC	LDO, 2.0V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
X1	-	IMX1	Si-npn	Dual, 60V, 150mA, 180MHz	SOT-363	33	T8	7b	Rhm
X1	-	R1163D211D	LVR-IC	LDO, 2.1V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
X11	-	IMX11	Si-npn	Dual, HF, 25V, 20mA	SOT-363	33	T16	7b	Rhm
X17	-	IMX17	Si-npn	Dual, 60V, 500mA, 250MHz	SOT-363	33	T8	7b	Rhm
X2	-	BZX84C56TW	Z-diode	Triple, 54.88..57.12V, Zzt=135Ω, Izt=2.5mA, 200mW	SOT-363	33dd	-	7d	Pjt
X2	-	IMX2	Si-npn	Dual, 60V, 0.15A, 180MHz	SOT-363	33tf	T1	7b	Rhm
X2	-	R1163D221D	LVR-IC	LDO, 2.2V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
X3	-	BZX84C62TW	Z-diode	Triple, 60.76..63.24V, Zzt=150Ω, Izt=2.5mA, 200mW	SOT-363	33dd	-	7d	Pjt
X3	-	IMX3	Si-npn	Dual, 60V, 0.15A, 180MHz	SOT-363	33	T16	7b	Rhm
X3	-	R1163D231D	LVR-IC	LDO, 2.3V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
X4	-	BZX84C68TW	Z-diode	Triple, 66.64..69.36V, Zzt=200Ω, Izt=2.5mA, 200mW	SOT-363	33dd	-	7d	Pjt
X4	-	EMX4	Si-npn	Dual, HF, 30V, 50mA, 150mW, B=27..270, 1.5GHz	EMT6	35	T17	7b	Rhm
X4	-	IMX4	Si-npn	Dual, HF, 30V, 50mA, 300mW, B=27..270, 1.5GHz	SC-74	33	T16	7b	Rhm
X4	-	IMX8	Si-npn	Dual, 120V, 50mA, 300mW, B=180..820, 140MHz	SC-74	33	T16	7b	Rhm
X4	-	R1163D241D	LVR-IC	LDO, 2.4V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
X4	-	UMX4N	Si-npn	Dual, HF, 30V, 50mA, 150mW, B=27..270, 1.5GHz	SC-88	33	T17	7b	Rhm
X5	-	74LVCH1T45GW	CMOS-Log	Dual supply translating transceiver with 3-state output	SOT-363	33	Log70	7b	Nxp
X5	-	BZX84C75TW	Z-diode	Triple, 73.50..76.50V, Zzt=250Ω, Izt=2.5mA, 200mW	SOT-363	33dd	-	7d	Pjt
X5	-	IMX5	Si-npn	Dual, HF, 20V, 50mA, >1400MHz	SOT-363	33	T16	7b	Rhm
X5	-	R1163D251D	LVR-IC	LDO, 2.5V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
X6	-	IMX6	Si-npn	Dual, HF, 40V, 50mA, >150MHz	SOT-363	33tf	T1	7b	Rhm
X6	-	R1163D261D	LVR-IC	LDO, 2.6V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
X7	-	NC7NP34L8	CMOS-Log	Triple non-inverter buffers	MPAK-8	47	Log69	8d	F
X7	-	R1163D271D	LVR-IC	LDO, 2.7V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
X8	-	R1163D281D	LVR-IC	LDO, 2.8V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
X9	-	IMX9	Si-npn	Dual, Hi-beta, 25V, 0.5A, B>560	SOT-363	33	T8	7b	Rhm
X9	-	R1163D291D	LVR-IC	LDO, 2.9V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
XA	-	BZX84C51TW	Z-diode	Triple, 49.98..52.02V, Zzt=100Ω, Izt=5mA, 200mW	SOT-363	33dd	-	7d	Pjt
XA	-	RN1601	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=4k7/4k7	SM6	33	TD3	7b	Tos
XA	-	RN1901	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/4k7	US6	33	TD3	7b	Tos
XA	-	RN1901FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=4k7/4k7	US6	33	TD3	7b	Tos
XB	-	RN1602	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=20k/10k	SM6	33	TD3	7b	Tos
XB	-	RN1902	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=20k/10k	US6	33	TD3	7b	Tos
XB	-	RN1902FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=20k/10k	US6	33	TD3	7b	Tos
XC	-	RN1603	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=22k/22k	SM6	33	TD3	7b	Tos
XC	-	RN1903	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	US6	33	TD3	7b	Tos
XC	-	RN1903FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=22k/22k	US6	33	TD3	7b	Tos
XD	-	RN1604	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=47k/47k	SM6	33	TD3	7b	Tos
XD	-	RN1904	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	US6	33	TD3	7b	Tos
XD	-	RN1904FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=47k/47k	US6	33	TD3	7b	Tos
XE	-	RN1605	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=2k2/47k	SM6	33	TD3	7b	Tos
XE	-	RN1905	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/47k	US6	33	TD3	7b	Tos
XE	-	RN1905FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=2k2/47k	US6	33	TD3	7b	Tos
XF	-	RN1606	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=4k7/47k	SM6	33	TD3	7b	Tos
XF	-	RN1906	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/47k	US6	33	TD3	7b	Tos
XF	-	RN1906FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=4k7/47k	US6	33	TD3	7b	Tos
XH	-	RN1607	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=10k/47k	SM6	33	TD3	7b	Tos
XH	-	RN1907	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/47k	US6	33	TD3	7b	Tos
XH	-	RN1907FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=10k/47k	ES6	35	TD3	7b	Tos
XI	-	RN1608	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=22k/47k	SM6	33	TD3	7b	Tos
XI	-	RN1908	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	US6	33	TD3	7b	Tos
XI	-	RN1908FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=22k/47k	ES6	35	TD3	7b	Tos
XJ	-	RN1609	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1/R2=47k/22k	SM6	33	TD3	7b	Tos
XJ	-	RN1909	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/22k	US6	33	TD3	7b	Tos
XJ	-	RN1909FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=47k/22k	ES6	35	TD3	7b	Tos
XK	-	RN1610	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1=4k7	SM6	33	TD3	7b	Tos
XK	-	RN1910	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1=4k7	US6	33	TD3	7b	Tos
XK	-	RN1910FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1=4k7	ES6	35	TD3	7b	Tos
XM	-	RN1611	Si-npn-Digi	Dual, Sw, 50V, 100mA, 300mW, 250MHz, R1=10k	SM6	33	TD3	7b	Tos
XM	-	RN1911	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	US6	33	TD3	7b	Tos
XM	-	RN1911FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1=10k	ES6	35	TD3	7b	Tos
XMAA	-	YB1220ST26MAA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAB	-	YB1220ST26MAB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAC	-	YB1220ST26MAC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAD	-	YB1220ST26MAD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAE	-	YB1220ST26MAE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAF	-	YB1220ST26MAF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAG	-	YB1220ST26MAG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAH	-	YB1220ST26MAH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAI	-	YB1220ST26MAI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAJ	-	YB1220ST26MAJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAK	-	YB1220ST26MAK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAL	-	YB1220ST26MAL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAM	-	YB1220ST26MAM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAN	-	YB1220ST26MAN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAO	-	YB1220ST26MAO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAP	-	YB1220ST26MAP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAQ	-	YB1220ST26MAQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAR	-	YB1220ST26MAR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAS	-	YB1220ST26MAS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAT	-	YB1220ST26MAT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAU	-	YB1220ST26MAU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAV	-	YB1220ST26MAV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAW	-	YB1220ST26MAW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMAX	-	YB1220ST26MAX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XMAY	-	YB1220ST26MAY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBA	-	YB1220ST26MBA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBB	-	YB1220ST26MBB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBC	-	YB1220ST26MBC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBD	-	YB1220ST26MBD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBE	-	YB1220ST26MBE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBF	-	YB1220ST26MBF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBG	-	YB1220ST26MBG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBH	-	YB1220ST26MBH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBI	-	YB1220ST26MBI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBJ	-	YB1220ST26MBJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBK	-	YB1220ST26MBK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBL	-	YB1220ST26MBL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBM	-	YB1220ST26MBM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBN	-	YB1220ST26MBN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBO	-	YB1220ST26MBO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBP	-	YB1220ST26MBP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBQ	-	YB1220ST26MBQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBR	-	YB1220ST26MBR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBS	-	YB1220ST26MBS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBT	-	YB1220ST26MBT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBU	-	YB1220ST26MBU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBV	-	YB1220ST26MBV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBW	-	YB1220ST26MBW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBX	-	YB1220ST26MBX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMBY	-	YB1220ST26MBY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCA	-	YB1220ST26MCA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCB	-	YB1220ST26MCB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCC	-	YB1220ST26MCC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCD	-	YB1220ST26MCD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCE	-	YB1220ST26MCE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCF	-	YB1220ST26MCF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCG	-	YB1220ST26MCG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCH	-	YB1220ST26MCH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCI	-	YB1220ST26MCI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCJ	-	YB1220ST26MCJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCK	-	YB1220ST26MCK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCL	-	YB1220ST26MCL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCM	-	YB1220ST26MCM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCN	-	YB1220ST26MCN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCO	-	YB1220ST26MCO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCP	-	YB1220ST26MCP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCQ	-	YB1220ST26MCQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCR	-	YB1220ST26MCR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCS	-	YB1220ST26MCS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCT	-	YB1220ST26MCT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCU	-	YB1220ST26MCU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCV	-	YB1220ST26MCV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCW	-	YB1220ST26MCW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCX	-	YB1220ST26MCX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMCY	-	YB1220ST26MCY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDA	-	YB1220ST26MDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDB	-	YB1220ST26MDB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDC	-	YB1220ST26MDC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDD	-	YB1220ST26MDD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDE	-	YB1220ST26MDE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDF	-	YB1220ST26MDF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDG	-	YB1220ST26MDG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDH	-	YB1220ST26MDH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDI	-	YB1220ST26MDI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDJ	-	YB1220ST26MDJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDK	-	YB1220ST26MDK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDL	-	YB1220ST26MDL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDM	-	YB1220ST26MDM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDN	-	YB1220ST26MDN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDO	-	YB1220ST26MDO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDP	-	YB1220ST26MDP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDQ	-	YB1220ST26MDQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDR	-	YB1220ST26MDR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDS	-	YB1220ST26MDS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XMDT	-	YB1220ST26MDT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDU	-	YB1220ST26MDU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDV	-	YB1220ST26MDV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDW	-	YB1220ST26MDW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDX	-	YB1220ST26MDX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMDY	-	YB1220ST26MDY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEA	-	YB1220ST26MEA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEB	-	YB1220ST26MEB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEC	-	YB1220ST26MEC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMED	-	YB1220ST26MED	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEE	-	YB1220ST26MEE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEF	-	YB1220ST26MEF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEG	-	YB1220ST26MEG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEH	-	YB1220ST26MEH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEI	-	YB1220ST26MEI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEJ	-	YB1220ST26MEJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEK	-	YB1220ST26MEK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEL	-	YB1220ST26MEL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEM	-	YB1220ST26MEM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEN	-	YB1220ST26MEN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEO	-	YB1220ST26MEO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEP	-	YB1220ST26MEP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEQ	-	YB1220ST26MEQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMER	-	YB1220ST26MER	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMES	-	YB1220ST26MES	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMET	-	YB1220ST26MET	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEU	-	YB1220ST26MEU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEV	-	YB1220ST26MEV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEW	-	YB1220ST26MEW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEX	-	YB1220ST26MEX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMEY	-	YB1220ST26MEY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFA	-	YB1220ST26MFA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFB	-	YB1220ST26MFB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFC	-	YB1220ST26MFC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFD	-	YB1220ST26MFD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFE	-	YB1220ST26MFE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFF	-	YB1220ST26MFF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFG	-	YB1220ST26MFG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFH	-	YB1220ST26MFH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFI	-	YB1220ST26MFI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFJ	-	YB1220ST26MFJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFK	-	YB1220ST26MFK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFL	-	YB1220ST26MFL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFM	-	YB1220ST26MFM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFN	-	YB1220ST26MFN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFO	-	YB1220ST26MFO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFP	-	YB1220ST26MFP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFQ	-	YB1220ST26MFQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFR	-	YB1220ST26MFR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFS	-	YB1220ST26MFS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFT	-	YB1220ST26MFT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFU	-	YB1220ST26MFU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFV	-	YB1220ST26MFV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFW	-	YB1220ST26MFW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFX	-	YB1220ST26MFX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMFY	-	YB1220ST26MFY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGA	-	YB1220ST26MGA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGB	-	YB1220ST26MGB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGC	-	YB1220ST26MGC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGD	-	YB1220ST26MGD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGE	-	YB1220ST26MGE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGF	-	YB1220ST26MGF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGG	-	YB1220ST26MGG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGH	-	YB1220ST26MGH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGI	-	YB1220ST26MGI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGJ	-	YB1220ST26MGJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGK	-	YB1220ST26MGK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGL	-	YB1220ST26MGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGM	-	YB1220ST26MGM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGN	-	YB1220ST26MGN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XMGO	-	YB1220ST26MGO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGP	-	YB1220ST26MGP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGQ	-	YB1220ST26MGQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGR	-	YB1220ST26MGR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGS	-	YB1220ST26MGS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGT	-	YB1220ST26MGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGU	-	YB1220ST26MGU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGV	-	YB1220ST26MGV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGW	-	YB1220ST26MGW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGX	-	YB1220ST26MGX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMGY	-	YB1220ST26MGY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHA	-	YB1220ST26MHA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHB	-	YB1220ST26MHB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHC	-	YB1220ST26MHC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHD	-	YB1220ST26MHD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHE	-	YB1220ST26MHE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHF	-	YB1220ST26MHF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHG	-	YB1220ST26MHG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHH	-	YB1220ST26MHH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHI	-	YB1220ST26MHI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHJ	-	YB1220ST26MHJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHK	-	YB1220ST26MHK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHL	-	YB1220ST26MHL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHM	-	YB1220ST26MHM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHN	-	YB1220ST26MHN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHO	-	YB1220ST26MHO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHP	-	YB1220ST26MHP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHQ	-	YB1220ST26MHQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHR	-	YB1220ST26MHR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHS	-	YB1220ST26MHS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHT	-	YB1220ST26MHT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHU	-	YB1220ST26MHU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHV	-	YB1220ST26MHV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHW	-	YB1220ST26MHW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHX	-	YB1220ST26MHX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMHY	-	YB1220ST26MHY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIA	-	YB1220ST26MIA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIB	-	YB1220ST26MIB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIC	-	YB1220ST26MIC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMID	-	YB1220ST26MID	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIE	-	YB1220ST26MIE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIF	-	YB1220ST26MIF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIG	-	YB1220ST26MIG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIH	-	YB1220ST26MIH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMII	-	YB1220ST26MII	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIJ	-	YB1220ST26MIJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIK	-	YB1220ST26MIK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIL	-	YB1220ST26MIL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIM	-	YB1220ST26MIM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIN	-	YB1220ST26MIN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIO	-	YB1220ST26MIO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIP	-	YB1220ST26MIP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIQ	-	YB1220ST26MIQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIR	-	YB1220ST26MIR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIS	-	YB1220ST26MIS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIT	-	YB1220ST26MIT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIU	-	YB1220ST26MIU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIV	-	YB1220ST26MIV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIW	-	YB1220ST26MIW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIX	-	YB1220ST26MIX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMIY	-	YB1220ST26MIY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJA	-	YB1220ST26MJA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJB	-	YB1220ST26MJB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJC	-	YB1220ST26MJC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJD	-	YB1220ST26MJD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJE	-	YB1220ST26MJE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJF	-	YB1220ST26MJF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJG	-	YB1220ST26MJG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJH	-	YB1220ST26MJH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJI	-	YB1220ST26MJI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XMJJ	-	YB1220ST26MJJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJK	-	YB1220ST26MJK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJL	-	YB1220ST26MJL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJM	-	YB1220ST26MJM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJN	-	YB1220ST26MJN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJO	-	YB1220ST26MJO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJP	-	YB1220ST26MJP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJQ	-	YB1220ST26MJQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJR	-	YB1220ST26MJR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJS	-	YB1220ST26MJS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJT	-	YB1220ST26MJT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJU	-	YB1220ST26MJU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJV	-	YB1220ST26MJV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJW	-	YB1220ST26MJW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJX	-	YB1220ST26MJX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMJY	-	YB1220ST26MJY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKA	-	YB1220ST26MKA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKB	-	YB1220ST26MKB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKC	-	YB1220ST26MKC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKD	-	YB1220ST26MKD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKE	-	YB1220ST26MKE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKF	-	YB1220ST26MKF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKG	-	YB1220ST26MKG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKH	-	YB1220ST26MKH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKI	-	YB1220ST26MKI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKJ	-	YB1220ST26MKJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKK	-	YB1220ST26MKK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKL	-	YB1220ST26MKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKM	-	YB1220ST26MKM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKN	-	YB1220ST26MKN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKO	-	YB1220ST26MKO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKP	-	YB1220ST26MKP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKQ	-	YB1220ST26MKQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKR	-	YB1220ST26MKR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKS	-	YB1220ST26MKS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKT	-	YB1220ST26MKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKU	-	YB1220ST26MKU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKV	-	YB1220ST26MKV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKW	-	YB1220ST26MKW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKX	-	YB1220ST26MKX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMKY	-	YB1220ST26MKY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLA	-	YB1220ST26MLA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLB	-	YB1220ST26MLB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLC	-	YB1220ST26MLC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLD	-	YB1220ST26MLD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLE	-	YB1220ST26MLE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLF	-	YB1220ST26MLF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLG	-	YB1220ST26MLG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLH	-	YB1220ST26MLH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLI	-	YB1220ST26MLI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLJ	-	YB1220ST26MLJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLK	-	YB1220ST26MLK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLL	-	YB1220ST26MLL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLM	-	YB1220ST26MLM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLN	-	YB1220ST26MLN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLO	-	YB1220ST26MLO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLP	-	YB1220ST26MLP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLQ	-	YB1220ST26MLQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLR	-	YB1220ST26MLR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLS	-	YB1220ST26MLS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLT	-	YB1220ST26MLT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLU	-	YB1220ST26MLU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLV	-	YB1220ST26MLV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLW	-	YB1220ST26MLW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLX	-	YB1220ST26MLX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMLY	-	YB1220ST26MLY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMA	-	YB1220ST26MMA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMB	-	YB1220ST26MMB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMC	-	YB1220ST26MMC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMD	-	YB1220ST26MMD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XMME	-	YB1220ST26MME	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMF	-	YB1220ST26MMF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMG	-	YB1220ST26MMG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMH	-	YB1220ST26MMH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMI	-	YB1220ST26MMI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMJ	-	YB1220ST26MMJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMK	-	YB1220ST26MMK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMML	-	YB1220ST26MML	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMM	-	YB1220ST26MMM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMN	-	YB1220ST26MMN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMO	-	YB1220ST26MMO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMP	-	YB1220ST26MMP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMQ	-	YB1220ST26MMQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMR	-	YB1220ST26MMR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMS	-	YB1220ST26MMS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMT	-	YB1220ST26MMT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMU	-	YB1220ST26MMU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMV	-	YB1220ST26MMV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMW	-	YB1220ST26MMW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMX	-	YB1220ST26MMX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMMY	-	YB1220ST26MMY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNA	-	YB1220ST26MNA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNB	-	YB1220ST26MNB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNC	-	YB1220ST26MNC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMND	-	YB1220ST26MND	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNE	-	YB1220ST26MNE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNF	-	YB1220ST26MNF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNG	-	YB1220ST26MNG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNH	-	YB1220ST26MNH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNI	-	YB1220ST26MNI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNJ	-	YB1220ST26MNJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNK	-	YB1220ST26MNK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNL	-	YB1220ST26MNL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNM	-	YB1220ST26MNM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNN	-	YB1220ST26MNN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNO	-	YB1220ST26MNO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNP	-	YB1220ST26MNP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNQ	-	YB1220ST26MNQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNR	-	YB1220ST26MNR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNS	-	YB1220ST26MNS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNT	-	YB1220ST26MNT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNU	-	YB1220ST26MNU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNV	-	YB1220ST26MNV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNW	-	YB1220ST26MNW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNX	-	YB1220ST26MNX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMNY	-	YB1220ST26MNY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOA	-	YB1220ST26MOA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOB	-	YB1220ST26MOB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOC	-	YB1220ST26MOC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOD	-	YB1220ST26MOD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOE	-	YB1220ST26MOE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOF	-	YB1220ST26MOF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOG	-	YB1220ST26MOG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOH	-	YB1220ST26MOH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOI	-	YB1220ST26MOI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOJ	-	YB1220ST26MOJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOK	-	YB1220ST26MOK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOL	-	YB1220ST26MOL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOM	-	YB1220ST26MOM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMON	-	YB1220ST26MON	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOO	-	YB1220ST26MOO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOP	-	YB1220ST26MOP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOQ	-	YB1220ST26MOQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOR	-	YB1220ST26MOR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOS	-	YB1220ST26MOS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOT	-	YB1220ST26MOT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOU	-	YB1220ST26MOU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOV	-	YB1220ST26MOV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOW	-	YB1220ST26MOW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMOX	-	YB1220ST26MOX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XMOY	-	YB1220ST26MOY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPA	-	YB1220ST26MPA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPB	-	YB1220ST26MPB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPC	-	YB1220ST26MPC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPD	-	YB1220ST26MPD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPE	-	YB1220ST26MPE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPF	-	YB1220ST26MPF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPG	-	YB1220ST26MPG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPH	-	YB1220ST26MPH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPI	-	YB1220ST26MPI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPJ	-	YB1220ST26MPJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPK	-	YB1220ST26MPK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPL	-	YB1220ST26MPL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPM	-	YB1220ST26MPM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPN	-	YB1220ST26MPN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPO	-	YB1220ST26MPO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPP	-	YB1220ST26MPP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPQ	-	YB1220ST26MPQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPR	-	YB1220ST26MPR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPS	-	YB1220ST26MPS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPT	-	YB1220ST26MPT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPU	-	YB1220ST26MPU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPV	-	YB1220ST26MPV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPW	-	YB1220ST26MPW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPX	-	YB1220ST26MPX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMPY	-	YB1220ST26MPY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQA	-	YB1220ST26MQA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQB	-	YB1220ST26MQB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQC	-	YB1220ST26MQC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQD	-	YB1220ST26MQD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQE	-	YB1220ST26MQE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQF	-	YB1220ST26MQF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQG	-	YB1220ST26MQG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQH	-	YB1220ST26MQH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQI	-	YB1220ST26MQI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQJ	-	YB1220ST26MQJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQK	-	YB1220ST26MQK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQL	-	YB1220ST26MQL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQM	-	YB1220ST26MQM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQN	-	YB1220ST26MQN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQO	-	YB1220ST26MQO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQP	-	YB1220ST26MQP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQQ	-	YB1220ST26MQQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQR	-	YB1220ST26MQR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQS	-	YB1220ST26MQS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQT	-	YB1220ST26MQT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQU	-	YB1220ST26MQU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQV	-	YB1220ST26MQV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQW	-	YB1220ST26MQW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQX	-	YB1220ST26MQX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMQY	-	YB1220ST26MQY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRA	-	YB1220ST26MRA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRB	-	YB1220ST26MRB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRC	-	YB1220ST26MRC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRD	-	YB1220ST26MRD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRE	-	YB1220ST26MRE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRF	-	YB1220ST26MRF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRG	-	YB1220ST26MRG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRH	-	YB1220ST26MRH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRI	-	YB1220ST26MRI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRJ	-	YB1220ST26MRJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRK	-	YB1220ST26MRK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRL	-	YB1220ST26MRL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRM	-	YB1220ST26MRM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRN	-	YB1220ST26MRN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRO	-	YB1220ST26MRO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRP	-	YB1220ST26MRP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRQ	-	YB1220ST26MRQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRR	-	YB1220ST26MRR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRS	-	YB1220ST26MRS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XMRT	-	YB1220ST26MRT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRU	-	YB1220ST26MRU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRV	-	YB1220ST26MRV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRW	-	YB1220ST26MRW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRX	-	YB1220ST26MRX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMRY	-	YB1220ST26MRY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSA	-	YB1220ST26MSA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSB	-	YB1220ST26MSB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSC	-	YB1220ST26MSC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSD	-	YB1220ST26MSD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSE	-	YB1220ST26MSE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSF	-	YB1220ST26MSF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSG	-	YB1220ST26MSG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSH	-	YB1220ST26MSH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSI	-	YB1220ST26MSI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSJ	-	YB1220ST26MSJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSK	-	YB1220ST26MSK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSL	-	YB1220ST26MSL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSM	-	YB1220ST26MSM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSN	-	YB1220ST26MSN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSO	-	YB1220ST26MSO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSP	-	YB1220ST26MSP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSQ	-	YB1220ST26MSQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSR	-	YB1220ST26MSR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSS	-	YB1220ST26MSS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMST	-	YB1220ST26MST	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSU	-	YB1220ST26MSU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSV	-	YB1220ST26MSV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSW	-	YB1220ST26MSW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSX	-	YB1220ST26MSX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMSY	-	YB1220ST26MSY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTA	-	YB1220ST26MTA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTB	-	YB1220ST26MTB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTC	-	YB1220ST26MTC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTD	-	YB1220ST26MTD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTE	-	YB1220ST26MTE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTF	-	YB1220ST26MTF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTG	-	YB1220ST26MTG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTH	-	YB1220ST26MTH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTI	-	YB1220ST26MTI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTJ	-	YB1220ST26MTJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTK	-	YB1220ST26MTK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTL	-	YB1220ST26MTL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTM	-	YB1220ST26MTM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTN	-	YB1220ST26MTN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTO	-	YB1220ST26MTO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTP	-	YB1220ST26MTP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTQ	-	YB1220ST26MTQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTR	-	YB1220ST26MTR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTS	-	YB1220ST26MTS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTT	-	YB1220ST26MTT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTU	-	YB1220ST26MTU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTV	-	YB1220ST26MTV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTW	-	YB1220ST26MTW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTX	-	YB1220ST26MTX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMTY	-	YB1220ST26MTY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUA	-	YB1220ST26MUA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUB	-	YB1220ST26MUB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUC	-	YB1220ST26MUC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUD	-	YB1220ST26MUD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUE	-	YB1220ST26MUE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUF	-	YB1220ST26MUF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUG	-	YB1220ST26MUG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUH	-	YB1220ST26MUH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUI	-	YB1220ST26MUI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUJ	-	YB1220ST26MUJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUK	-	YB1220ST26MUK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUL	-	YB1220ST26MUL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUM	-	YB1220ST26MUM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUN	-	YB1220ST26MUN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XMUO	-	YB1220ST26MUO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUP	-	YB1220ST26MUP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUQ	-	YB1220ST26MUQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUR	-	YB1220ST26MUR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUS	-	YB1220ST26MUS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUT	-	YB1220ST26MUT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUU	-	YB1220ST26MUU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUV	-	YB1220ST26MUV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUW	-	YB1220ST26MUW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUX	-	YB1220ST26MUX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMUY	-	YB1220ST26MUY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVA	-	YB1220ST26MVA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVB	-	YB1220ST26MVB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVC	-	YB1220ST26MVC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVD	-	YB1220ST26MVD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVE	-	YB1220ST26MVE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVF	-	YB1220ST26MVF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVG	-	YB1220ST26MVG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVH	-	YB1220ST26MVH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVI	-	YB1220ST26MVI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVJ	-	YB1220ST26MVJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVK	-	YB1220ST26MVK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVL	-	YB1220ST26MVL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVM	-	YB1220ST26MVM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVN	-	YB1220ST26MVN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVO	-	YB1220ST26MVO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVP	-	YB1220ST26MVP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVQ	-	YB1220ST26MVQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVR	-	YB1220ST26MVR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVS	-	YB1220ST26MVS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVT	-	YB1220ST26MVT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVU	-	YB1220ST26MVU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVV	-	YB1220ST26MVV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVW	-	YB1220ST26MVW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVX	-	YB1220ST26MVX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMVY	-	YB1220ST26MVY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWA	-	YB1220ST26MWA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWB	-	YB1220ST26MWB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWC	-	YB1220ST26MWC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWD	-	YB1220ST26MWD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWE	-	YB1220ST26MWE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWF	-	YB1220ST26MWF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWG	-	YB1220ST26MWG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWH	-	YB1220ST26MWH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWI	-	YB1220ST26MWI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWJ	-	YB1220ST26MWJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWK	-	YB1220ST26MWK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWL	-	YB1220ST26MWL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWM	-	YB1220ST26MWM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWN	-	YB1220ST26MWN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWO	-	YB1220ST26MWO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWP	-	YB1220ST26MWP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWQ	-	YB1220ST26MWQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWR	-	YB1220ST26MWR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWS	-	YB1220ST26MWS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWT	-	YB1220ST26MWT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWU	-	YB1220ST26MWU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWV	-	YB1220ST26MWV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWW	-	YB1220ST26MWW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWX	-	YB1220ST26MWX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMWY	-	YB1220ST26MWY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXA	-	YB1220ST26MXA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXB	-	YB1220ST26MXB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXC	-	YB1220ST26MXC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXD	-	YB1220ST26MXD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXE	-	YB1220ST26MXE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXF	-	YB1220ST26MXF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXG	-	YB1220ST26MXG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXH	-	YB1220ST26MXH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXI	-	YB1220ST26MXI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XMXJ	-	YB1220ST26MXJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXK	-	YB1220ST26MXK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXL	-	YB1220ST26MXL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXM	-	YB1220ST26MXM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXN	-	YB1220ST26MXN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXO	-	YB1220ST26MXO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXP	-	YB1220ST26MXP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXQ	-	YB1220ST26MXQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXR	-	YB1220ST26MXR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXS	-	YB1220ST26MXS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXT	-	YB1220ST26MXT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXU	-	YB1220ST26MXU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXV	-	YB1220ST26MXV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXW	-	YB1220ST26MXW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXX	-	YB1220ST26MXX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMXY	-	YB1220ST26MXY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYA	-	YB1220ST26MYA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYB	-	YB1220ST26MYB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYC	-	YB1220ST26MYC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYD	-	YB1220ST26MYD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYE	-	YB1220ST26MYE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYF	-	YB1220ST26MYF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYG	-	YB1220ST26MYG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYH	-	YB1220ST26MYH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYI	-	YB1220ST26MYI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYJ	-	YB1220ST26MYJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYK	-	YB1220ST26MYK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYL	-	YB1220ST26MYL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYM	-	YB1220ST26MYM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYN	-	YB1220ST26MYN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYO	-	YB1220ST26MYO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYP	-	YB1220ST26MYP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYQ	-	YB1220ST26MYQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYR	-	YB1220ST26MYR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYS	-	YB1220ST26MYS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYT	-	YB1220ST26MYT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYU	-	YB1220ST26MYU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYV	-	YB1220ST26MYV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYW	-	YB1220ST26MYW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYX	-	YB1220ST26MYX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XMYY	-	YB1220ST26MYY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 200mA, +CE	SOT-23-6	33yf	VR19	7b	Ybn
XRAA	-	YB1220ST26RAA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAB	-	YB1220ST26RAB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAC	-	YB1220ST26RAC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAD	-	YB1220ST26RAD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAE	-	YB1220ST26RAE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAF	-	YB1220ST26RAF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAG	-	YB1220ST26RAG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAH	-	YB1220ST26RAH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAI	-	YB1220ST26RAI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAJ	-	YB1220ST26RAJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAK	-	YB1220ST26RAK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAL	-	YB1220ST26RAL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAM	-	YB1220ST26RAM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAN	-	YB1220ST26RAN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAO	-	YB1220ST26RAO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAP	-	YB1220ST26RAP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAQ	-	YB1220ST26RAQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAR	-	YB1220ST26RAR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAS	-	YB1220ST26RAS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAT	-	YB1220ST26RAT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAU	-	YB1220ST26RAU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAV	-	YB1220ST26RAV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAW	-	YB1220ST26RAW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAX	-	YB1220ST26RAX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRAY	-	YB1220ST26RAY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBA	-	YB1220ST26RBA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBB	-	YB1220ST26RBB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBC	-	YB1220ST26RBC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBD	-	YB1220ST26RBD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XRBE	-	YB1220ST26RBE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBF	-	YB1220ST26RBF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBG	-	YB1220ST26RBG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBH	-	YB1220ST26RBH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBI	-	YB1220ST26RBI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBJ	-	YB1220ST26RBJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBK	-	YB1220ST26RBK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBL	-	YB1220ST26RBL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBM	-	YB1220ST26RBM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBN	-	YB1220ST26RBN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBO	-	YB1220ST26RBO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBP	-	YB1220ST26RBP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBQ	-	YB1220ST26RBQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBR	-	YB1220ST26RBR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBS	-	YB1220ST26RBS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBT	-	YB1220ST26RBT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBU	-	YB1220ST26RBU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBV	-	YB1220ST26RBV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBW	-	YB1220ST26RBW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBX	-	YB1220ST26RBX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRBY	-	YB1220ST26RBY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCA	-	YB1220ST26RCA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCB	-	YB1220ST26RCB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCC	-	YB1220ST26RCC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCD	-	YB1220ST26RCD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCE	-	YB1220ST26RCE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCF	-	YB1220ST26RCF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCG	-	YB1220ST26RCG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCH	-	YB1220ST26RCH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCI	-	YB1220ST26RCI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCJ	-	YB1220ST26RCJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCK	-	YB1220ST26RCK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCL	-	YB1220ST26RCL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCM	-	YB1220ST26RCM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCN	-	YB1220ST26RCN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCO	-	YB1220ST26RCO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCP	-	YB1220ST26RCP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCQ	-	YB1220ST26RCQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCR	-	YB1220ST26RCR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCS	-	YB1220ST26RCS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCT	-	YB1220ST26RCT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCU	-	YB1220ST26RCU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCV	-	YB1220ST26RCV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCW	-	YB1220ST26RCW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCX	-	YB1220ST26RCX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRCY	-	YB1220ST26RCY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDA	-	YB1220ST26RDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDB	-	YB1220ST26RDB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDC	-	YB1220ST26RDC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDD	-	YB1220ST26RDD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDE	-	YB1220ST26RDE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDF	-	YB1220ST26RDF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDG	-	YB1220ST26RDG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDH	-	YB1220ST26RDH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDI	-	YB1220ST26RDI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDJ	-	YB1220ST26RDJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDK	-	YB1220ST26RDK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDL	-	YB1220ST26RDL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDM	-	YB1220ST26RDM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDN	-	YB1220ST26RDN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDO	-	YB1220ST26RDO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDP	-	YB1220ST26RDP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDQ	-	YB1220ST26RDQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDR	-	YB1220ST26RDR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDS	-	YB1220ST26RDS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDT	-	YB1220ST26RDT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDU	-	YB1220ST26RDU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDV	-	YB1220ST26RDV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDW	-	YB1220ST26RDW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRDX	-	YB1220ST26RDX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XRDY	-	YB1220ST26RDY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREA	-	YB1220ST26REA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREB	-	YB1220ST26REB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREC	-	YB1220ST26REC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRED	-	YB1220ST26RED	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREE	-	YB1220ST26REE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREF	-	YB1220ST26REF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREG	-	YB1220ST26REG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREH	-	YB1220ST26REH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREI	-	YB1220ST26REI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREJ	-	YB1220ST26REJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREK	-	YB1220ST26REK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREL	-	YB1220ST26REL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREM	-	YB1220ST26REM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREN	-	YB1220ST26REN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREO	-	YB1220ST26REO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREP	-	YB1220ST26REP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREQ	-	YB1220ST26REQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRER	-	YB1220ST26RER	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRES	-	YB1220ST26RES	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRET	-	YB1220ST26RET	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREU	-	YB1220ST26REU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREV	-	YB1220ST26REV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREW	-	YB1220ST26REW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREX	-	YB1220ST26REX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XREY	-	YB1220ST26REY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFA	-	YB1220ST26RFA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFB	-	YB1220ST26RFB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFC	-	YB1220ST26RFC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFD	-	YB1220ST26RFD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFE	-	YB1220ST26RFE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFF	-	YB1220ST26RFF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFG	-	YB1220ST26RFG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFH	-	YB1220ST26RFH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFI	-	YB1220ST26RFI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFJ	-	YB1220ST26RFJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFK	-	YB1220ST26RFK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFL	-	YB1220ST26RFL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFM	-	YB1220ST26RFM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFN	-	YB1220ST26RFN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFO	-	YB1220ST26RFO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFP	-	YB1220ST26RFP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFQ	-	YB1220ST26RFQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFR	-	YB1220ST26RFR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFS	-	YB1220ST26RFS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFT	-	YB1220ST26RFT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFU	-	YB1220ST26RFU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFV	-	YB1220ST26RFV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFW	-	YB1220ST26RFW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFX	-	YB1220ST26RFX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRFY	-	YB1220ST26RFY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGA	-	YB1220ST26RGA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGB	-	YB1220ST26RGB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGC	-	YB1220ST26RGC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGD	-	YB1220ST26RGD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGE	-	YB1220ST26RGE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGF	-	YB1220ST26RGF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGG	-	YB1220ST26RGG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGH	-	YB1220ST26RGH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGI	-	YB1220ST26RGI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGJ	-	YB1220ST26RGJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGK	-	YB1220ST26RGK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGL	-	YB1220ST26RGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGM	-	YB1220ST26RGM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGN	-	YB1220ST26RGN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGO	-	YB1220ST26RGO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGP	-	YB1220ST26RGP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGQ	-	YB1220ST26RGQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGR	-	YB1220ST26RGR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGS	-	YB1220ST26RGS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XRGT	-	YB1220ST26RGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGU	-	YB1220ST26RGU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGV	-	YB1220ST26RGV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGW	-	YB1220ST26RGW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGX	-	YB1220ST26RGX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRGY	-	YB1220ST26RGY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHA	-	YB1220ST26RHA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHB	-	YB1220ST26RHB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHC	-	YB1220ST26RHC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHD	-	YB1220ST26RHD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHE	-	YB1220ST26RHE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHF	-	YB1220ST26RHF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHG	-	YB1220ST26RHG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHH	-	YB1220ST26RHH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHI	-	YB1220ST26RHI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHJ	-	YB1220ST26RHJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHK	-	YB1220ST26RHK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHL	-	YB1220ST26RHL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHM	-	YB1220ST26RHM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHN	-	YB1220ST26RHN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHO	-	YB1220ST26RHO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHP	-	YB1220ST26RHP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHQ	-	YB1220ST26RHQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHR	-	YB1220ST26RHR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHS	-	YB1220ST26RHS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHT	-	YB1220ST26RHT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHU	-	YB1220ST26RHU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHV	-	YB1220ST26RHV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHW	-	YB1220ST26RHW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHX	-	YB1220ST26RHX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRHY	-	YB1220ST26RHY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIA	-	YB1220ST26RIA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIB	-	YB1220ST26RIB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIC	-	YB1220ST26RIC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRID	-	YB1220ST26RID	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIE	-	YB1220ST26RIE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIF	-	YB1220ST26RIF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIG	-	YB1220ST26RIG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIH	-	YB1220ST26RIH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRII	-	YB1220ST26RII	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIJ	-	YB1220ST26RIJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIK	-	YB1220ST26RIK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIL	-	YB1220ST26RIL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIM	-	YB1220ST26RIM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIN	-	YB1220ST26RIN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIO	-	YB1220ST26RIO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIP	-	YB1220ST26RIP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIQ	-	YB1220ST26RIQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIR	-	YB1220ST26RIR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIS	-	YB1220ST26RIS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIT	-	YB1220ST26RIT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIU	-	YB1220ST26RIU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIV	-	YB1220ST26RIV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIW	-	YB1220ST26RIW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIX	-	YB1220ST26RIX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRIY	-	YB1220ST26RIY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJA	-	YB1220ST26RJA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJB	-	YB1220ST26RJB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJC	-	YB1220ST26RJC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJD	-	YB1220ST26RJD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJE	-	YB1220ST26RJE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJF	-	YB1220ST26RJF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJG	-	YB1220ST26RJG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJH	-	YB1220ST26RJH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJI	-	YB1220ST26RJI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJJ	-	YB1220ST26RJJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJK	-	YB1220ST26RJK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJL	-	YB1220ST26RJL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJM	-	YB1220ST26RJM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJN	-	YB1220ST26RJN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XRJO	-	YB1220ST26RJO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJP	-	YB1220ST26RJP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJQ	-	YB1220ST26RJQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJR	-	YB1220ST26RJR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJS	-	YB1220ST26RJS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJT	-	YB1220ST26RJT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJU	-	YB1220ST26RJU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJV	-	YB1220ST26RJV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJW	-	YB1220ST26RJW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJX	-	YB1220ST26RJX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRJY	-	YB1220ST26RJY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKA	-	YB1220ST26RKA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKB	-	YB1220ST26RKB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKC	-	YB1220ST26RKC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKD	-	YB1220ST26RKD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKE	-	YB1220ST26RKE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKF	-	YB1220ST26RKF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKG	-	YB1220ST26RKG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKH	-	YB1220ST26RKH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKI	-	YB1220ST26RKI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKJ	-	YB1220ST26RKJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKK	-	YB1220ST26RKK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKL	-	YB1220ST26RKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKM	-	YB1220ST26RKM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKN	-	YB1220ST26RKN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKO	-	YB1220ST26RKO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKP	-	YB1220ST26RKP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKQ	-	YB1220ST26RKQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKR	-	YB1220ST26RKR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKS	-	YB1220ST26RKS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKT	-	YB1220ST26RKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKU	-	YB1220ST26RKU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKV	-	YB1220ST26RKV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKW	-	YB1220ST26RKW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKX	-	YB1220ST26RKX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRKY	-	YB1220ST26RKY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLA	-	YB1220ST26RLA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLB	-	YB1220ST26RLB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLC	-	YB1220ST26RLC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLD	-	YB1220ST26RLD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLE	-	YB1220ST26RLE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLF	-	YB1220ST26RLF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLG	-	YB1220ST26RLG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLH	-	YB1220ST26RLH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLI	-	YB1220ST26RLI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLJ	-	YB1220ST26RLJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLK	-	YB1220ST26RLK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLL	-	YB1220ST26RLL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLM	-	YB1220ST26RLM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLN	-	YB1220ST26RLN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLO	-	YB1220ST26RLO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLP	-	YB1220ST26RLP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLQ	-	YB1220ST26RLQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLR	-	YB1220ST26RLR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLS	-	YB1220ST26RLS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLT	-	YB1220ST26RLT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLU	-	YB1220ST26RLU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLV	-	YB1220ST26RLV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLW	-	YB1220ST26RLW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLX	-	YB1220ST26RLX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRLY	-	YB1220ST26RLY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMA	-	YB1220ST26RMA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMB	-	YB1220ST26RMB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMC	-	YB1220ST26RMC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMD	-	YB1220ST26RMD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRME	-	YB1220ST26RME	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMF	-	YB1220ST26RMF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMG	-	YB1220ST26RMG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMH	-	YB1220ST26RMH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMI	-	YB1220ST26RMI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XRMJ	-	YB1220ST26RMJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMK	-	YB1220ST26RMK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRML	-	YB1220ST26RML	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMM	-	YB1220ST26RMM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMN	-	YB1220ST26RMN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMO	-	YB1220ST26RMO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMP	-	YB1220ST26RMP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMQ	-	YB1220ST26RMQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMR	-	YB1220ST26RMR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMS	-	YB1220ST26RMS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMT	-	YB1220ST26RMT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMU	-	YB1220ST26RMU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMV	-	YB1220ST26RMV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMW	-	YB1220ST26RMW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMX	-	YB1220ST26RMX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRMY	-	YB1220ST26RMY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNA	-	YB1220ST26RNA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNB	-	YB1220ST26RNB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNC	-	YB1220ST26RNC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRND	-	YB1220ST26RND	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNE	-	YB1220ST26RNE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNF	-	YB1220ST26RNF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNG	-	YB1220ST26RNG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNH	-	YB1220ST26RNH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNI	-	YB1220ST26RNI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNJ	-	YB1220ST26RNJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNK	-	YB1220ST26RNK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNL	-	YB1220ST26RNL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNM	-	YB1220ST26RNM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNN	-	YB1220ST26RNN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNO	-	YB1220ST26RNO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNP	-	YB1220ST26RNP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNQ	-	YB1220ST26RNQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNR	-	YB1220ST26RNR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNS	-	YB1220ST26RNS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNT	-	YB1220ST26RNT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNU	-	YB1220ST26RNU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNV	-	YB1220ST26RNV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNW	-	YB1220ST26RNW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNX	-	YB1220ST26RNX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRNY	-	YB1220ST26RNY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROA	-	YB1220ST26ROA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROB	-	YB1220ST26ROB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROC	-	YB1220ST26ROC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROD	-	YB1220ST26ROD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROE	-	YB1220ST26ROE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROF	-	YB1220ST26ROF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROG	-	YB1220ST26ROG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROH	-	YB1220ST26ROH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROI	-	YB1220ST26ROI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROJ	-	YB1220ST26ROJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROK	-	YB1220ST26ROK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROL	-	YB1220ST26ROL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROM	-	YB1220ST26ROM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRON	-	YB1220ST26RON	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROO	-	YB1220ST26ROO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROP	-	YB1220ST26ROP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROQ	-	YB1220ST26ROQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROR	-	YB1220ST26ROR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROS	-	YB1220ST26ROS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROT	-	YB1220ST26ROT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROU	-	YB1220ST26ROU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROV	-	YB1220ST26ROV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROW	-	YB1220ST26ROW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROX	-	YB1220ST26ROX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XROY	-	YB1220ST26ROY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPA	-	YB1220ST26RPA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPB	-	YB1220ST26RPB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPC	-	YB1220ST26RPC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPD	-	YB1220ST26RPD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XRPE	-	YB1220ST26RPE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPF	-	YB1220ST26RPF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPG	-	YB1220ST26RPG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPH	-	YB1220ST26RPH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPI	-	YB1220ST26RPI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPJ	-	YB1220ST26RPJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPK	-	YB1220ST26RPK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPL	-	YB1220ST26RPL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPM	-	YB1220ST26RPM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPN	-	YB1220ST26RPN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPO	-	YB1220ST26RPO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPP	-	YB1220ST26RPP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPQ	-	YB1220ST26RPQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPR	-	YB1220ST26RPR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPS	-	YB1220ST26RPS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPT	-	YB1220ST26RPT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPU	-	YB1220ST26RPU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPV	-	YB1220ST26RPV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPW	-	YB1220ST26RPW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPX	-	YB1220ST26RPX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRPY	-	YB1220ST26RPY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQA	-	YB1220ST26RQA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQB	-	YB1220ST26RQB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQC	-	YB1220ST26RQC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQD	-	YB1220ST26RQD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQE	-	YB1220ST26RQE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQF	-	YB1220ST26RQF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQG	-	YB1220ST26RQG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQH	-	YB1220ST26RQH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQI	-	YB1220ST26RQI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQJ	-	YB1220ST26RQJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQK	-	YB1220ST26RQK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQL	-	YB1220ST26RQL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQM	-	YB1220ST26RQM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQN	-	YB1220ST26RQN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQO	-	YB1220ST26RQO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQP	-	YB1220ST26RQP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQQ	-	YB1220ST26RQQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQR	-	YB1220ST26RQR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQS	-	YB1220ST26RQS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQT	-	YB1220ST26RQT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQU	-	YB1220ST26RQU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQV	-	YB1220ST26RQV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQW	-	YB1220ST26RQW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQX	-	YB1220ST26RQX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRQY	-	YB1220ST26RQY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRA	-	YB1220ST26RRA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRB	-	YB1220ST26RRB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRC	-	YB1220ST26RRC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRD	-	YB1220ST26RRD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRE	-	YB1220ST26RRE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRF	-	YB1220ST26RRF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRG	-	YB1220ST26RRG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRH	-	YB1220ST26RRH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRI	-	YB1220ST26RRI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRJ	-	YB1220ST26RRJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRK	-	YB1220ST26RRK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRL	-	YB1220ST26RRL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRM	-	YB1220ST26RRM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRN	-	YB1220ST26RRN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRO	-	YB1220ST26RRO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRP	-	YB1220ST26RRP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRQ	-	YB1220ST26RRQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRR	-	YB1220ST26RRR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRS	-	YB1220ST26RRS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRT	-	YB1220ST26RRT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRU	-	YB1220ST26RRU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRV	-	YB1220ST26RRV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRW	-	YB1220ST26RRW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRRX	-	YB1220ST26RRX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XRRY	-	YB1220ST26RRY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSA	-	YB1220ST26RSA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSB	-	YB1220ST26RSB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSC	-	YB1220ST26RSC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSD	-	YB1220ST26RSD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSE	-	YB1220ST26RSE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSF	-	YB1220ST26RSF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSG	-	YB1220ST26RSG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSH	-	YB1220ST26RSH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSI	-	YB1220ST26RSI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSJ	-	YB1220ST26RSJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSK	-	YB1220ST26RSK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSL	-	YB1220ST26RSL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSM	-	YB1220ST26RSM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSN	-	YB1220ST26RSN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSO	-	YB1220ST26RSO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSP	-	YB1220ST26RSP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSQ	-	YB1220ST26RSQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSR	-	YB1220ST26RSR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSS	-	YB1220ST26RSS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRST	-	YB1220ST26RST	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSU	-	YB1220ST26RSU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSV	-	YB1220ST26RSV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSW	-	YB1220ST26RSW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSX	-	YB1220ST26RSX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRSY	-	YB1220ST26RSY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTA	-	YB1220ST26RTA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTB	-	YB1220ST26RTB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTC	-	YB1220ST26RTC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTD	-	YB1220ST26RTD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTE	-	YB1220ST26RTE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTF	-	YB1220ST26RTF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTG	-	YB1220ST26RTG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTH	-	YB1220ST26RTH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTI	-	YB1220ST26RTI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTJ	-	YB1220ST26RTJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTK	-	YB1220ST26RTK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTL	-	YB1220ST26RTL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTM	-	YB1220ST26RTM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTN	-	YB1220ST26RTN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTO	-	YB1220ST26RTO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTP	-	YB1220ST26RTP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTQ	-	YB1220ST26RTQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTR	-	YB1220ST26RTR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTS	-	YB1220ST26RTS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTT	-	YB1220ST26RTT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTU	-	YB1220ST26RTU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTV	-	YB1220ST26RTV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTW	-	YB1220ST26RTW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTX	-	YB1220ST26RTX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRTY	-	YB1220ST26RTY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUA	-	YB1220ST26RUA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUB	-	YB1220ST26RUB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUC	-	YB1220ST26RUC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUD	-	YB1220ST26RUD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUE	-	YB1220ST26RUE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUF	-	YB1220ST26RUF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUG	-	YB1220ST26RUG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUH	-	YB1220ST26RUH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUI	-	YB1220ST26RUI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUJ	-	YB1220ST26RUJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUK	-	YB1220ST26RUK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUL	-	YB1220ST26RUL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUM	-	YB1220ST26RUM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUN	-	YB1220ST26RUN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUO	-	YB1220ST26RUO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUP	-	YB1220ST26RUP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUQ	-	YB1220ST26RUQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUR	-	YB1220ST26RUR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUS	-	YB1220ST26RUS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XRUT	-	YB1220ST26RUT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUU	-	YB1220ST26RUU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUV	-	YB1220ST26RUV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUW	-	YB1220ST26RUW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUX	-	YB1220ST26RUX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRUY	-	YB1220ST26RUY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVA	-	YB1220ST26RVA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVB	-	YB1220ST26RVB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVC	-	YB1220ST26RVC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVD	-	YB1220ST26RVD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVE	-	YB1220ST26RVE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVF	-	YB1220ST26RVF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVG	-	YB1220ST26RVG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVH	-	YB1220ST26RVH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVI	-	YB1220ST26RVI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVJ	-	YB1220ST26RVJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVK	-	YB1220ST26RVK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVL	-	YB1220ST26RVL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVM	-	YB1220ST26RVM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVN	-	YB1220ST26RVN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVO	-	YB1220ST26RVO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVP	-	YB1220ST26RVP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVQ	-	YB1220ST26RVQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVR	-	YB1220ST26RVR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVS	-	YB1220ST26RVS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVT	-	YB1220ST26RVT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVU	-	YB1220ST26RVU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVV	-	YB1220ST26RVV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVW	-	YB1220ST26RVW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVX	-	YB1220ST26RVX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRVY	-	YB1220ST26RVY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWA	-	YB1220ST26RWA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWB	-	YB1220ST26RWB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWC	-	YB1220ST26RWC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWD	-	YB1220ST26RWD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWE	-	YB1220ST26RWE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWF	-	YB1220ST26RWF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWG	-	YB1220ST26RWG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWH	-	YB1220ST26RWH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWI	-	YB1220ST26RWI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWJ	-	YB1220ST26RWJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWK	-	YB1220ST26RWK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWL	-	YB1220ST26RWL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWM	-	YB1220ST26RWM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWN	-	YB1220ST26RWN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWO	-	YB1220ST26RWO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWP	-	YB1220ST26RWP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWQ	-	YB1220ST26RWQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWR	-	YB1220ST26RWR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWS	-	YB1220ST26RWS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWT	-	YB1220ST26RWT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWU	-	YB1220ST26RWU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWV	-	YB1220ST26RWV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWW	-	YB1220ST26RWW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWX	-	YB1220ST26RWX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRWY	-	YB1220ST26RWY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXA	-	YB1220ST26RXA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXB	-	YB1220ST26RXB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXC	-	YB1220ST26RXC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXD	-	YB1220ST26RXD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXE	-	YB1220ST26RXE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXF	-	YB1220ST26RXF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXG	-	YB1220ST26RXG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXH	-	YB1220ST26RXH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXI	-	YB1220ST26RXI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXJ	-	YB1220ST26RXJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXK	-	YB1220ST26RXK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXL	-	YB1220ST26RXL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXM	-	YB1220ST26RXM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXN	-	YB1220ST26RXN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XRXO	-	YB1220ST26RXO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXP	-	YB1220ST26RXP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXQ	-	YB1220ST26RXQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXR	-	YB1220ST26RXR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXS	-	YB1220ST26RXS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXT	-	YB1220ST26RXT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXU	-	YB1220ST26RXU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXV	-	YB1220ST26RXV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXW	-	YB1220ST26RXW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXX	-	YB1220ST26RXX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRXY	-	YB1220ST26RXY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYA	-	YB1220ST26RYA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYB	-	YB1220ST26RYB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYC	-	YB1220ST26RYC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYD	-	YB1220ST26RYD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYE	-	YB1220ST26RYE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYF	-	YB1220ST26RYF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYG	-	YB1220ST26RYG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYH	-	YB1220ST26RYH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYI	-	YB1220ST26RYI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYJ	-	YB1220ST26RYJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYK	-	YB1220ST26RYK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYL	-	YB1220ST26RYL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYM	-	YB1220ST26RYM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYN	-	YB1220ST26RYN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYO	-	YB1220ST26RYO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYP	-	YB1220ST26RYP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYQ	-	YB1220ST26RYQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYR	-	YB1220ST26RYR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYS	-	YB1220ST26RYS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYT	-	YB1220ST26RYT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYU	-	YB1220ST26RYU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYV	-	YB1220ST26RYV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYW	-	YB1220ST26RYW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYX	-	YB1220ST26RYX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XRYY	-	YB1220ST26RYY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 200mA, +CE	SOT-23-6	33zb	VR19	7b	Ybn
XTAA	-	YB1220ST26TAA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAB	-	YB1220ST26TAB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAC	-	YB1220ST26TAC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAD	-	YB1220ST26TAD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAE	-	YB1220ST26TAE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAF	-	YB1220ST26TAF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAG	-	YB1220ST26TAG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAH	-	YB1220ST26TAH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAI	-	YB1220ST26TAI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAJ	-	YB1220ST26TAJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAK	-	YB1220ST26TAK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAL	-	YB1220ST26TAL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAM	-	YB1220ST26TAM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAN	-	YB1220ST26TAN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAO	-	YB1220ST26TAO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAP	-	YB1220ST26TAP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAQ	-	YB1220ST26TAQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAR	-	YB1220ST26TAR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAS	-	YB1220ST26TAS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAT	-	YB1220ST26TAT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAU	-	YB1220ST26TAU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAV	-	YB1220ST26TAV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAW	-	YB1220ST26TAW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAX	-	YB1220ST26TAX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTAY	-	YB1220ST26TAY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBA	-	YB1220ST26TBA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBB	-	YB1220ST26TBB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBC	-	YB1220ST26TBC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBD	-	YB1220ST26TBD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBE	-	YB1220ST26TBE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBF	-	YB1220ST26TBF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBG	-	YB1220ST26TBG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBH	-	YB1220ST26TBH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBI	-	YB1220ST26TBI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XTBJ	-	YB1220ST26TBJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBK	-	YB1220ST26TBK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBL	-	YB1220ST26TBL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBM	-	YB1220ST26TBM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBN	-	YB1220ST26TBN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBO	-	YB1220ST26TBO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBP	-	YB1220ST26TBP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBQ	-	YB1220ST26TBQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBR	-	YB1220ST26TBR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBS	-	YB1220ST26TBS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBT	-	YB1220ST26TBT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBU	-	YB1220ST26TBU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBV	-	YB1220ST26TBV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBW	-	YB1220ST26TBW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBX	-	YB1220ST26TBX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTBY	-	YB1220ST26TBY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCA	-	YB1220ST26TCA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCB	-	YB1220ST26TCB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCC	-	YB1220ST26TCC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCD	-	YB1220ST26TCD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCE	-	YB1220ST26TCE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCF	-	YB1220ST26TCF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCG	-	YB1220ST26TCG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCH	-	YB1220ST26TCH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCI	-	YB1220ST26TCI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCJ	-	YB1220ST26TCJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCK	-	YB1220ST26TCK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCL	-	YB1220ST26TCL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCM	-	YB1220ST26TCM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCN	-	YB1220ST26TCN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCO	-	YB1220ST26TCO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCP	-	YB1220ST26TCP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCQ	-	YB1220ST26TCQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCR	-	YB1220ST26TCR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCS	-	YB1220ST26TCS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCT	-	YB1220ST26TCT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCU	-	YB1220ST26TCU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCV	-	YB1220ST26TCV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCW	-	YB1220ST26TCW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCX	-	YB1220ST26TCX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTCY	-	YB1220ST26TCY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDA	-	YB1220ST26TDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDB	-	YB1220ST26TDB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDC	-	YB1220ST26TDC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDD	-	YB1220ST26TDD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDE	-	YB1220ST26TDE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDF	-	YB1220ST26TDF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDG	-	YB1220ST26TDG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDH	-	YB1220ST26TDH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDI	-	YB1220ST26TDI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDJ	-	YB1220ST26TDJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDK	-	YB1220ST26TDK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDL	-	YB1220ST26TDL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDM	-	YB1220ST26TDM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDN	-	YB1220ST26TDN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDO	-	YB1220ST26TDO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDP	-	YB1220ST26TDP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDQ	-	YB1220ST26TDQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDR	-	YB1220ST26TDR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDS	-	YB1220ST26TDS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDT	-	YB1220ST26TDT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDU	-	YB1220ST26TDU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDV	-	YB1220ST26TDV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDW	-	YB1220ST26TDW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDX	-	YB1220ST26TDX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTDY	-	YB1220ST26TDY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEA	-	YB1220ST26TEA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEB	-	YB1220ST26TEB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEC	-	YB1220ST26TEC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTED	-	YB1220ST26TED	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XTEE	-	YB1220ST26TEE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEF	-	YB1220ST26TEF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEG	-	YB1220ST26TEG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEH	-	YB1220ST26TEH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEI	-	YB1220ST26TEI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEJ	-	YB1220ST26TEJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEK	-	YB1220ST26TEK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEL	-	YB1220ST26TEL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEM	-	YB1220ST26TEM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEN	-	YB1220ST26TEN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEO	-	YB1220ST26TEO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEP	-	YB1220ST26TEP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEQ	-	YB1220ST26TEQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTER	-	YB1220ST26TER	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTES	-	YB1220ST26TES	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTET	-	YB1220ST26TET	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEU	-	YB1220ST26TEU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEV	-	YB1220ST26TEV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEW	-	YB1220ST26TEW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEX	-	YB1220ST26TEX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTEY	-	YB1220ST26TEY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFA	-	YB1220ST26TFA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFB	-	YB1220ST26TFB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFC	-	YB1220ST26TFC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFD	-	YB1220ST26TFD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFE	-	YB1220ST26TFE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFF	-	YB1220ST26TFF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFG	-	YB1220ST26TFG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFH	-	YB1220ST26TFH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFI	-	YB1220ST26TFI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFJ	-	YB1220ST26TFJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFK	-	YB1220ST26TFK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFL	-	YB1220ST26TFL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFM	-	YB1220ST26TFM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFN	-	YB1220ST26TFN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFO	-	YB1220ST26TFO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFP	-	YB1220ST26TFP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFQ	-	YB1220ST26TFQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFR	-	YB1220ST26TFR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFS	-	YB1220ST26TFS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFT	-	YB1220ST26TFT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFU	-	YB1220ST26TFU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFV	-	YB1220ST26TFV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFW	-	YB1220ST26TFW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFX	-	YB1220ST26TFX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTFY	-	YB1220ST26TFY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGA	-	YB1220ST26TGA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGB	-	YB1220ST26TGB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGC	-	YB1220ST26TGC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGD	-	YB1220ST26TGD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGE	-	YB1220ST26TGE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGF	-	YB1220ST26TGF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGG	-	YB1220ST26TGG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGH	-	YB1220ST26TGH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGI	-	YB1220ST26TGI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGJ	-	YB1220ST26TGJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGK	-	YB1220ST26TGK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGL	-	YB1220ST26TGL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGM	-	YB1220ST26TGM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGN	-	YB1220ST26TGN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGO	-	YB1220ST26TGO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGP	-	YB1220ST26TGP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGQ	-	YB1220ST26TGQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGR	-	YB1220ST26TGR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGS	-	YB1220ST26TGS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGT	-	YB1220ST26TGT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGU	-	YB1220ST26TGU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGV	-	YB1220ST26TGV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGW	-	YB1220ST26TGW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTGX	-	YB1220ST26TGX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XTGY	-	YB1220ST26TGY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHA	-	YB1220ST26THA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHB	-	YB1220ST26THB	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHC	-	YB1220ST26THC	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHD	-	YB1220ST26THD	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHE	-	YB1220ST26THE	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHF	-	YB1220ST26THF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHG	-	YB1220ST26THG	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHH	-	YB1220ST26THH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHI	-	YB1220ST26THI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHJ	-	YB1220ST26THJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHK	-	YB1220ST26THK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHL	-	YB1220ST26THL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHM	-	YB1220ST26THM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHN	-	YB1220ST26THN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHO	-	YB1220ST26THO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHP	-	YB1220ST26THP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHQ	-	YB1220ST26THQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHR	-	YB1220ST26THR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHS	-	YB1220ST26THS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHT	-	YB1220ST26THT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHU	-	YB1220ST26THU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHV	-	YB1220ST26THV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHW	-	YB1220ST26THW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHX	-	YB1220ST26THX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTHY	-	YB1220ST26THY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIA	-	YB1220ST26TIA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIB	-	YB1220ST26TIB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIC	-	YB1220ST26TIC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTID	-	YB1220ST26TID	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIE	-	YB1220ST26TIE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIF	-	YB1220ST26TIF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIG	-	YB1220ST26TIG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIH	-	YB1220ST26TIH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTII	-	YB1220ST26TII	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIJ	-	YB1220ST26TIJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIK	-	YB1220ST26TIK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIL	-	YB1220ST26TIL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIM	-	YB1220ST26TIM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIN	-	YB1220ST26TIN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIO	-	YB1220ST26TIO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIP	-	YB1220ST26TIP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIQ	-	YB1220ST26TIQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIR	-	YB1220ST26TIR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIS	-	YB1220ST26TIS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIT	-	YB1220ST26TIT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIU	-	YB1220ST26TIU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIV	-	YB1220ST26TIV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIW	-	YB1220ST26TIW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIX	-	YB1220ST26TIX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTIY	-	YB1220ST26TIY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJA	-	YB1220ST26TJA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJB	-	YB1220ST26TJB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJC	-	YB1220ST26TJC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJD	-	YB1220ST26TJD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJE	-	YB1220ST26TJE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJF	-	YB1220ST26TJF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJG	-	YB1220ST26TJG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJH	-	YB1220ST26TJH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJI	-	YB1220ST26TJI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJJ	-	YB1220ST26TJJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJK	-	YB1220ST26TJK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJL	-	YB1220ST26TJL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJM	-	YB1220ST26TJM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJN	-	YB1220ST26TJN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJO	-	YB1220ST26TJO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJP	-	YB1220ST26TJP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJQ	-	YB1220ST26TJQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJR	-	YB1220ST26TJR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJS	-	YB1220ST26TJS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XTJT	-	YB1220ST26TJT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJU	-	YB1220ST26TJU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJV	-	YB1220ST26TJV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJW	-	YB1220ST26TJW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJX	-	YB1220ST26TJX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTJY	-	YB1220ST26TJY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKA	-	YB1220ST26TKA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKB	-	YB1220ST26TKB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKC	-	YB1220ST26TKC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKD	-	YB1220ST26TKD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKE	-	YB1220ST26TKE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKF	-	YB1220ST26TKF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKG	-	YB1220ST26TKG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKH	-	YB1220ST26TKH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKI	-	YB1220ST26TKI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKJ	-	YB1220ST26TKJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKK	-	YB1220ST26TKK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKL	-	YB1220ST26TKL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKM	-	YB1220ST26TKM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKN	-	YB1220ST26TKN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKO	-	YB1220ST26TKO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKP	-	YB1220ST26TKP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKQ	-	YB1220ST26TKQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKR	-	YB1220ST26TKR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKS	-	YB1220ST26TKS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKT	-	YB1220ST26TKT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKU	-	YB1220ST26TKU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKV	-	YB1220ST26TKV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKW	-	YB1220ST26TKW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKX	-	YB1220ST26TKX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTKY	-	YB1220ST26TKY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLA	-	YB1220ST26TLA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLB	-	YB1220ST26TLB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLC	-	YB1220ST26TLC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLD	-	YB1220ST26TLD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLE	-	YB1220ST26TLE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLF	-	YB1220ST26TLF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLG	-	YB1220ST26TLG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLH	-	YB1220ST26TLH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLI	-	YB1220ST26TLI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLJ	-	YB1220ST26TLJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLK	-	YB1220ST26TLK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLL	-	YB1220ST26TLL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLM	-	YB1220ST26TLM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLN	-	YB1220ST26TLN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLO	-	YB1220ST26TLO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLP	-	YB1220ST26TLP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLQ	-	YB1220ST26TLQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLR	-	YB1220ST26TLR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLS	-	YB1220ST26TLS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLT	-	YB1220ST26TLT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLU	-	YB1220ST26TLU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLV	-	YB1220ST26TLV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLW	-	YB1220ST26TLW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLX	-	YB1220ST26TLX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTLY	-	YB1220ST26TLY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMA	-	YB1220ST26TMA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMB	-	YB1220ST26TMB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMC	-	YB1220ST26TMC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMD	-	YB1220ST26TMD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTME	-	YB1220ST26TME	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMF	-	YB1220ST26TMF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMG	-	YB1220ST26TMG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMH	-	YB1220ST26TMH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMI	-	YB1220ST26TMI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMJ	-	YB1220ST26TMJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMK	-	YB1220ST26TMK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTML	-	YB1220ST26TML	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMM	-	YB1220ST26TMM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMN	-	YB1220ST26TMN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XTMO	-	YB1220ST26TMO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMP	-	YB1220ST26TMP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMQ	-	YB1220ST26TMQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMR	-	YB1220ST26TMR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMS	-	YB1220ST26TMS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMT	-	YB1220ST26TMT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMU	-	YB1220ST26TMU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMV	-	YB1220ST26TMV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMW	-	YB1220ST26TMW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMX	-	YB1220ST26TMX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTMY	-	YB1220ST26TMY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNA	-	YB1220ST26TNA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNB	-	YB1220ST26TNB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNC	-	YB1220ST26TNC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTND	-	YB1220ST26TND	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNE	-	YB1220ST26TNE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNF	-	YB1220ST26TNF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNG	-	YB1220ST26TNG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNH	-	YB1220ST26TNH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNI	-	YB1220ST26TNI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNJ	-	YB1220ST26TNJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNK	-	YB1220ST26TNK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNL	-	YB1220ST26TNL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNM	-	YB1220ST26TNM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNN	-	YB1220ST26TNN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNO	-	YB1220ST26TNO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNP	-	YB1220ST26TNP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNQ	-	YB1220ST26TNQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNR	-	YB1220ST26TNR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNS	-	YB1220ST26TNS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNT	-	YB1220ST26TNT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNU	-	YB1220ST26TNU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNV	-	YB1220ST26TNV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNW	-	YB1220ST26TNW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNX	-	YB1220ST26TNX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTNY	-	YB1220ST26TNY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOA	-	YB1220ST26TOA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOB	-	YB1220ST26TOB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOC	-	YB1220ST26TOC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOD	-	YB1220ST26TOD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOE	-	YB1220ST26TOE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOF	-	YB1220ST26TOF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOG	-	YB1220ST26TOG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOH	-	YB1220ST26TOH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOI	-	YB1220ST26TOI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOJ	-	YB1220ST26TOJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOK	-	YB1220ST26TOK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOL	-	YB1220ST26TOL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOM	-	YB1220ST26TOM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTON	-	YB1220ST26TON	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOO	-	YB1220ST26TOO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOP	-	YB1220ST26TOP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOQ	-	YB1220ST26TOQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOR	-	YB1220ST26TOR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOS	-	YB1220ST26TOS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOT	-	YB1220ST26TOT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOU	-	YB1220ST26TOU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOV	-	YB1220ST26TOV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOW	-	YB1220ST26TOW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOX	-	YB1220ST26TOX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTOY	-	YB1220ST26TOY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPA	-	YB1220ST26TPA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPB	-	YB1220ST26TPB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPC	-	YB1220ST26TPC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPD	-	YB1220ST26TPD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPE	-	YB1220ST26TPE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPF	-	YB1220ST26TPF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPG	-	YB1220ST26TPG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPH	-	YB1220ST26TPH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPI	-	YB1220ST26TPI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XTPJ	-	YB1220ST26TPJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPK	-	YB1220ST26TPK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPL	-	YB1220ST26TPL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPM	-	YB1220ST26TPM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPN	-	YB1220ST26TPN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPO	-	YB1220ST26TPO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPP	-	YB1220ST26TPP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPQ	-	YB1220ST26TPQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPR	-	YB1220ST26TPR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPS	-	YB1220ST26TPS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPT	-	YB1220ST26TPT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPU	-	YB1220ST26TPU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPV	-	YB1220ST26TPV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPW	-	YB1220ST26TPW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPX	-	YB1220ST26TPX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTPY	-	YB1220ST26TPY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQA	-	YB1220ST26TQA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQB	-	YB1220ST26TQB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQC	-	YB1220ST26TQC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQD	-	YB1220ST26TQD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQE	-	YB1220ST26TQE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQF	-	YB1220ST26TQF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQG	-	YB1220ST26TQG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQH	-	YB1220ST26TQH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQI	-	YB1220ST26TQI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQJ	-	YB1220ST26TQJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQK	-	YB1220ST26TQK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQL	-	YB1220ST26TQL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQM	-	YB1220ST26TQM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQN	-	YB1220ST26TQN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQO	-	YB1220ST26TQO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQP	-	YB1220ST26TQP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQQ	-	YB1220ST26TQQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQR	-	YB1220ST26TQR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQS	-	YB1220ST26TQS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQT	-	YB1220ST26TQT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQU	-	YB1220ST26TQU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQV	-	YB1220ST26TQV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQW	-	YB1220ST26TQW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQX	-	YB1220ST26TQX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTQY	-	YB1220ST26TQY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRA	-	YB1220ST26TRA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRB	-	YB1220ST26TRB	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRC	-	YB1220ST26TRC	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRD	-	YB1220ST26TRD	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRE	-	YB1220ST26TRE	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRF	-	YB1220ST26TRF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRG	-	YB1220ST26TRG	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRH	-	YB1220ST26TRH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRI	-	YB1220ST26TRI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRJ	-	YB1220ST26TRJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRK	-	YB1220ST26TRK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRL	-	YB1220ST26TRL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRM	-	YB1220ST26TRM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRN	-	YB1220ST26TRN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRO	-	YB1220ST26TRO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRP	-	YB1220ST26TRP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRQ	-	YB1220ST26TRQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRR	-	YB1220ST26TRR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRS	-	YB1220ST26TRS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRT	-	YB1220ST26TRT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRU	-	YB1220ST26TRU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRV	-	YB1220ST26TRV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRW	-	YB1220ST26TRW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRX	-	YB1220ST26TRX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTRY	-	YB1220ST26TRY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSA	-	YB1220ST26TSA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSB	-	YB1220ST26TSB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSC	-	YB1220ST26TSC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSD	-	YB1220ST26TSD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XTSE	-	YB1220ST26TSE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSF	-	YB1220ST26TSF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSG	-	YB1220ST26TSG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSH	-	YB1220ST26TSH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSI	-	YB1220ST26TSI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSJ	-	YB1220ST26TSJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSK	-	YB1220ST26TSK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSL	-	YB1220ST26TSL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSM	-	YB1220ST26TSM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSN	-	YB1220ST26TSN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSO	-	YB1220ST26TSO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSP	-	YB1220ST26TSP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSQ	-	YB1220ST26TSQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSR	-	YB1220ST26TSR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSS	-	YB1220ST26TSS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTST	-	YB1220ST26TST	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSU	-	YB1220ST26TSU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSV	-	YB1220ST26TSV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSW	-	YB1220ST26TSW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSX	-	YB1220ST26TSX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTSY	-	YB1220ST26TSY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTA	-	YB1220ST26TTA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTB	-	YB1220ST26TTB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTC	-	YB1220ST26TTC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTD	-	YB1220ST26TTD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTE	-	YB1220ST26TTE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTF	-	YB1220ST26TTF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTG	-	YB1220ST26TTG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTH	-	YB1220ST26TTH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTI	-	YB1220ST26TTI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTJ	-	YB1220ST26TTJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTK	-	YB1220ST26TTK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTL	-	YB1220ST26TTL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTM	-	YB1220ST26TTM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTN	-	YB1220ST26TTN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTO	-	YB1220ST26TTO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTP	-	YB1220ST26TTP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTQ	-	YB1220ST26TTQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTR	-	YB1220ST26TTR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTS	-	YB1220ST26TTS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTT	-	YB1220ST26TTT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTU	-	YB1220ST26TTU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTV	-	YB1220ST26TTV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTW	-	YB1220ST26TTW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTX	-	YB1220ST26TTX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTTY	-	YB1220ST26TTY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUA	-	YB1220ST26TUA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUB	-	YB1220ST26TUB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUC	-	YB1220ST26TUC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUD	-	YB1220ST26TUD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUE	-	YB1220ST26TUE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUF	-	YB1220ST26TUF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUG	-	YB1220ST26TUG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUH	-	YB1220ST26TUH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUI	-	YB1220ST26TUI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUJ	-	YB1220ST26TUJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUK	-	YB1220ST26TUK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUL	-	YB1220ST26TUL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUM	-	YB1220ST26TUM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUN	-	YB1220ST26TUN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUO	-	YB1220ST26TUO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUP	-	YB1220ST26TUP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUQ	-	YB1220ST26TUQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUR	-	YB1220ST26TUR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUS	-	YB1220ST26TUS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUT	-	YB1220ST26TUT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUU	-	YB1220ST26TUU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUV	-	YB1220ST26TUV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUW	-	YB1220ST26TUW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTUX	-	YB1220ST26TUX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XTUY	-	YB1220ST26TUY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVA	-	YB1220ST26TVA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVB	-	YB1220ST26TVB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVC	-	YB1220ST26TVC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVD	-	YB1220ST26TVD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVE	-	YB1220ST26TVE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVF	-	YB1220ST26TVF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVG	-	YB1220ST26TVG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVH	-	YB1220ST26TVH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVI	-	YB1220ST26TVI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVJ	-	YB1220ST26TVJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVK	-	YB1220ST26TVK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVL	-	YB1220ST26TVL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVM	-	YB1220ST26TVM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVN	-	YB1220ST26TVN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVO	-	YB1220ST26TVO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVP	-	YB1220ST26TVP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVQ	-	YB1220ST26TVQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVR	-	YB1220ST26TVR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVS	-	YB1220ST26TVS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVT	-	YB1220ST26TVT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVU	-	YB1220ST26TVU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVV	-	YB1220ST26TVV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVW	-	YB1220ST26TVW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVX	-	YB1220ST26TVX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTVY	-	YB1220ST26TVY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWA	-	YB1220ST26TWA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWB	-	YB1220ST26TWB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWC	-	YB1220ST26TWC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWD	-	YB1220ST26TWD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWE	-	YB1220ST26TWE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWF	-	YB1220ST26TWF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWG	-	YB1220ST26TWG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWH	-	YB1220ST26TWH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWI	-	YB1220ST26TWI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWJ	-	YB1220ST26TWJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWK	-	YB1220ST26TWK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWL	-	YB1220ST26TWL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWM	-	YB1220ST26TWM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWN	-	YB1220ST26TWN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWO	-	YB1220ST26TWO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWP	-	YB1220ST26TWP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWQ	-	YB1220ST26TWQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWR	-	YB1220ST26TWR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWS	-	YB1220ST26TWS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWT	-	YB1220ST26TWT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWU	-	YB1220ST26TWU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWV	-	YB1220ST26TWV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWW	-	YB1220ST26TWW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWX	-	YB1220ST26TWX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTWY	-	YB1220ST26TWY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXA	-	YB1220ST26TXA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXB	-	YB1220ST26TXB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXC	-	YB1220ST26TXC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXD	-	YB1220ST26TXD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXE	-	YB1220ST26TXE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXF	-	YB1220ST26TXF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXG	-	YB1220ST26TXG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXH	-	YB1220ST26TXH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXI	-	YB1220ST26TXI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXJ	-	YB1220ST26TXJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXK	-	YB1220ST26TXK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXL	-	YB1220ST26TXL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXM	-	YB1220ST26TXM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXN	-	YB1220ST26TXN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXO	-	YB1220ST26TXO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXP	-	YB1220ST26TXP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXQ	-	YB1220ST26TXQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXR	-	YB1220ST26TXR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXS	-	YB1220ST26TXS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XTXT	-	YB1220ST26TXT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXU	-	YB1220ST26TXU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXV	-	YB1220ST26TXV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXW	-	YB1220ST26TXW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXX	-	YB1220ST26TXX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTXY	-	YB1220ST26TXY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYA	-	YB1220ST26TYA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYB	-	YB1220ST26TYB	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYC	-	YB1220ST26TYC	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYD	-	YB1220ST26TYD	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYE	-	YB1220ST26TYE	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYF	-	YB1220ST26TYF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYG	-	YB1220ST26TYG	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYH	-	YB1220ST26TYH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYI	-	YB1220ST26TYI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYJ	-	YB1220ST26TYJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYK	-	YB1220ST26TYK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYL	-	YB1220ST26TYL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYM	-	YB1220ST26TYM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYN	-	YB1220ST26TYN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYO	-	YB1220ST26TYO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYP	-	YB1220ST26TYP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYQ	-	YB1220ST26TYQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYR	-	YB1220ST26TYR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYS	-	YB1220ST26TYS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYT	-	YB1220ST26TYT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYU	-	YB1220ST26TYU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYV	-	YB1220ST26TYV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYW	-	YB1220ST26TYW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYX	-	YB1220ST26TYX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XTYY	-	YB1220ST26TYY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 200mA, +CE	SOT-23-6	33x5	VR19	7b	Ybn
XX1	-	RN1970HFE	Si-npn-Digi	Dual, Sw, 40V, 100mA, 100mW, 250MHz, R1=4k7	ES6	35	TD8	7b	Tos
XX2	-	RN1971HFE	Si-npn-Digi	Dual, Sw, 40V, 100mA, 100mW, 250MHz, R1=10k	ES6	35	TD8	7b	Tos
XXA	-	RN1961	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/4k7	US6	33	TD8	7b	Tos
XXA	-	RN1961FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=4k7/4k7	ES6	35	TD8	7b	Tos
XXB	-	RN1962	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=20k/10k	US6	33	TD8	7b	Tos
XXB	-	RN1962FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=20k/10k	ES6	35	TD8	7b	Tos
XXC	-	RN1963	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/22k	US6	33	TD8	7b	Tos
XXC	-	RN1963FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=22k/22k	ES6	35	TD8	7b	Tos
XXD	-	RN1964	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/47k	US6	33	TD8	7b	Tos
XXD	-	RN1964FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=47k/47k	ES6	35	TD8	7b	Tos
XXE	-	RN1965	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=2k2/47k	US6	33	TD8	7b	Tos
XXE	-	RN1965FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=2k2/47k	ES6	35	TD8	7b	Tos
XXF	-	RN1966	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=4k7/47k	US6	33	TD8	7b	Tos
XXF	-	RN1966FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=4k7/47k	ES6	35	TD8	7b	Tos
XXH	-	RN1967	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=10k/47k	US6	33	TD8	7b	Tos
XXH	-	RN1967FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=10k/47k	ES6	35	TD8	7b	Tos
XXI	-	RN1968	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=22k/47k	US6	33	TD8	7b	Tos
XXI	-	RN1968FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=22k/47k	ES6	35	TD8	7b	Tos
XXJ	-	RN1969	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1/R2=47k/22k	US6	33	TD8	7b	Tos
XXJ	-	RN1969FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1/R2=47k/22k	ES6	35	TD8	7b	Tos
XXK	-	RN1970	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1=4k7	US6	33	TD8	7b	Tos
XXK	-	RN1970FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1=4k7	ES6	35	TD8	7b	Tos
XXM	-	RN1971	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, 250MHz, R1=10k	US6	33	TD8	7b	Tos
XXM	-	RN1971FE	Si-npn-Digi	Dual, Sw, 50V, 100mA, 100mW, 250MHz, R1=10k	ES6	35	TD8	7b	Tos
Y0	-	R1163D301D	LVR-IC	LDO, 3.0V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
Y1	-	R1163D311D	LVR-IC	LDO, 3.1V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
Y1	-	R5325N001A	LVR-IC	LDO, Dual out, Vout1/Vout2=2V/2V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
Y10	-	SSM2305RMZ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.8W(5V/4Ω), shutdown	SOP-8	47	AFP24	8d	Ad
Y1S	-	CGY195	MMIC	GaAs UHF multiband power amp. 3..6V, 0.8...3GHz (30dB)	SCT-595	71ad	A2	7l	Inf
Y2	-	KRC836E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=1k/10k	TES6	35	TD8	7k	Kec
Y2	-	KRC836U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=1k/10k	US6	33	TD3	7k	Kec
Y2	-	R1163D321D	LVR-IC	LDO, 3.2V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
Y2	-	R5325N002A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
Y3	-	R1163D331D	LVR-IC	LDO, 3.3V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
Y3	-	R5325N003A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
Y34	-	74LVC2G34GV	CMOS-Log	Dual non-inverter buffers	SOT-457	33	Log23	7b	Nxp
Y34	-	74LVC3G34DC	CMOS-Log	Triple non-inverter buffers	SOT765-1	55	Log69	8d	Nxp
Y38	-	74LVC2G38DC	CMOS-Log	Dual 2-input NAND gate (ODO)	SOT765-1	55	Log62	8d	Nxp
Y4	-	KRC837E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	TES6	35	TD8	7k	Kec





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Y4	-	KRC837U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/2.2k	US6	33	TD3	7k	Kec
Y4	-	R1163D341D	LVR-IC	LDO, 3.4V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
Y4	-	R5325N004A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
Y5	-	KRC838E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	TES6	35	TD8	7k	Kec
Y5	-	KRC838U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	US6	33	TD3	7k	Kec
Y5	-	R1163D351D	LVR-IC	LDO, 3.5V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
Y5	-	R5325N005A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
Y5S	-	CGY59W	MMIC	GaAs UHF preamp. 8V, 0.2...2.5GHz (13dB)	SOT-363	33	-	7l	Inf
Y6	-	KRC839E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	TES6	35	TD8	7k	Kec
Y6	-	KRC839U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/10k	US6	33	TD3	7k	Kec
Y6	-	R1163D361D	LVR-IC	LDO, 3.6V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
Y6	-	R5325N006A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
Y66	-	74LVCV2G66DC	CMOS-Log	2-channel analog switch	SOT765-1	55	Log68	8d	Nxp
Y66	-	74LVCV2G66DP	CMOS-Log	2-channel analog switch	SOT505-2	47	Log68	8d	Nxp
Y6S	-	CGY62	MMIC	GaAs UHF two-stage broadband amp, 6V, 0.2...2.5GHz (20dB)	MW-6	72	-	7k	Inf
Y7	-	KRC840E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/4.7k	TES6	35	TD8	7k	Kec
Y7	-	KRC840U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/4.7k	US6	33	TD3	7k	Kec
Y7	-	R1163D371D	LVR-IC	LDO, 3.7V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
Y7	-	R5325N007A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
Y7S	-	CGY60	MMIC	GaAs UHF preamp. 8V, 1.7...2GHz (12,5dB)	MW-6	72	-	7k	Inf
Y8	-	KRC841E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	TES6	35	TD8	7k	Kec
Y8	-	KRC841U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/10k	US6	33	TD3	7k	Kec
Y8	-	R1163D381D	LVR-IC	LDO, 3.8V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
Y8	-	R5325N008A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
Y8S	-	CGY63	MMIC	GaAs UHF broadband driver amp. 2.7..6V, 0.8...2.5GHz (22dB)	SCT-595	71an	A2	7l	Inf
Y9	-	KRC842E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	TES6	35	TD8	7k	Kec
Y9	-	KRC842U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=100k/100k	US6	33	TD3	7k	Kec
Y9	-	R1163D391D	LVR-IC	LDO, 3.9V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
Y9	-	R5325N009A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YA	-	74LVC2G34GW	CMOS-Log	Dual non-inverter buffers	SOT-363	33	Log23	7b	Nxp
YA	-	KRC821E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	TES6	35	TD8	7k	Kec
YA	-	KRC821U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	US6	33	TD3	7k	Kec
YA	-	R5325N010A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YA	-	RN2601	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=4.7k/4.7k	SM6	33	TD4	7b	Tos
YA	-	RN2901	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	US6	33	TD4	7b	Tos
YA	-	RN2901FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=4.7k/4.7k	SOT-563	35	TD4	7b	Tos
YB	-	KRC822E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	TES6	35	TD8	7k	Kec
YB	-	KRC822U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	US6	33	TD3	7k	Kec
YB	-	R5325N011A	LVR-IC	LDO, Dual out, Vout1/Vout2=3V/3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YB	-	RN2602	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=10k/10k	SM6	33	TD4	7b	Tos
YB	-	RN2902	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	US6	33	TD4	7b	Tos
YB	-	RN2902FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=10k/10k	SOT-563	35	TD4	7b	Tos
YC	-	74LVC1G57GW	CMOS-Log	Configurable multiple-function gate	SOT-363	33	Log36	7b	Nxp
YC	-	KRC823E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	TES6	35	TD8	7k	Kec
YC	-	KRC823U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	US6	33	TD3	7k	Kec
YC	-	R5325N012A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YC	-	RN2603	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=22k/22k	SM6	33	TD4	7b	Tos
YC	-	RN2903	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	US6	33	TD4	7b	Tos
YC	-	RN2903FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=22k/22k	SOT-563	35	TD4	7b	Tos
YD	-	74LVC2GU04GW	CMOS-Log	Dual inverters	SOT-363	33	Log24	7b	Nxp
YD	-	KRC824E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	TES6	35	TD8	7k	Kec
YD	-	KRC824U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	US6	33	TD3	7k	Kec
YD	-	R5325N013A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YD	-	RN2604	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=47k/47k	SM6	33	TD4	7b	Tos
YD	-	RN2904	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	US6	33	TD4	7b	Tos
YD	-	RN2904FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=47k/47k	SOT-563	35	TD4	7b	Tos
YE	-	KRC825E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	TES6	35	TD8	7k	Kec
YE	-	KRC825U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	US6	33	TD3	7k	Kec
YE	-	R5325N016A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YE	-	RN2605	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=2.2k/47k	SM6	33	TD4	7b	Tos
YE	-	RN2905	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	US6	33	TD4	7b	Tos
YE	-	RN2905FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=2.2k/47k	SOT-563	35	TD4	7b	Tos
YF	-	KRC826E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	TES6	35	TD8	7k	Kec
YF	-	KRC826U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	US6	33	TD3	7k	Kec
YF	-	R5325N017A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YF	-	RN2606	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=4.7k/47k	SM6	33	TD4	7b	Tos
YF	-	RN2906	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	US6	33	TD4	7b	Tos
YF	-	RN2906FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=4.7k/47k	SOT-563	35	TD4	7b	Tos
YG	-	74LVC1G332GV	CMOS-Log	3-input OR gate	SOT-457	33	Log32	7b	Nxp
YG	-	74LVC1G332GW	CMOS-Log	3-input OR gate	SOT-363	33	Log32	7b	Nxp



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
YG	-	R5325N014A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YH	-	74LVC1G386GV	CMOS-Log	3-input EXCLUSIVE-OR gate	SOT-363	33	Log33	7b	Nxp
YH	-	74LVC1G386GW	CMOS-Log	3-input EXCLUSIVE-OR gate	SOT-457	33	Log33	7b	Nxp
YH	-	KRC827E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	TES6	35	TD8	7k	Kec
YH	-	KRC827U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	US6	33	TD3	7k	Kec
YH	-	R5325N015A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YH	-	RN2607	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=10k/47k	SM6	33	TD4	7b	Tos
YH	-	RN2907	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	US6	33	TD4	7b	Tos
YH	-	RN2907FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=10k/47k	ES6	35	TD4	7b	Tos
YI	-	KRC828E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	TES6	35	TD8	7k	Kec
YI	-	KRC828U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	US6	33	TD3	7k	Kec
YI	-	RN2608	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=22k/47k	SM6	33	TD4	7b	Tos
YI	-	RN2908	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	US6	33	TD4	7b	Tos
YI	-	RN2908FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=22k/47k	ES6	35	TD4	7b	Tos
YJ	-	74LVC1G3157GV	CMOS-Log	2-channel analog multiplexer/demultiplexer	SOT-457	33	Log38	7b	Nxp
YJ	-	74LVC1G3157GW	CMOS-Log	2-channel analog multiplexer/demultiplexer	SOT-363	33	Log38	7b	Nxp
YJ	-	KRC829E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	TES6	35	TD8	7k	Kec
YJ	-	KRC829U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	US6	33	TD3	7k	Kec
YJ	-	R5325N018A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YJ	-	RN2609	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1/R2=47k/22k	SM6	33	TD4	7b	Tos
YJ	-	RN2909	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	US6	33	TD4	7b	Tos
YJ	-	RN2909FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=47k/22k	ES6	35	TD4	7b	Tos
YK	-	74LVC1G58GW	CMOS-Log	Configurable multiple-function gate	SOT-363	33	Log37	7b	Nxp
YK	-	KRC830E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4.7k	TES6	35	TD8	7k	Kec
YK	-	KRC830U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4.7k	US6	33	TD3	7k	Kec
YK	-	R5325N019A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YK	-	RN2610	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1=4.7k	SM6	33	TD4	7b	Tos
YK	-	RN2910	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4.7k	US6	33	TD4	7b	Tos
YK	-	RN2910FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1=4.7k	ES6	35	TD4	7b	Tos
YL	-	R5325N020A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YM	-	74LVC1G10GV	CMOS-Log	3-input NAND gate	SOT-457	33	Log29	7b	Nxp
YM	-	74LVC1G10GW	CMOS-Log	3-input NAND gate	SOT-363	33	Log29	7b	Nxp
YM	-	KRC831E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	TES6	35	TD8	7k	Kec
YM	-	KRC831U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	US6	33	TD3	7k	Kec
YM	-	R5325N021A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YM	-	RN2611	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 300mW, R1=10k	SM6	33	TD4	7b	Tos
YM	-	RN2911	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	US6	33	TD4	7b	Tos
YM	-	RN2911FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1=10k	ES6	35	TD4	7b	Tos
YN	-	KRC832E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=100k	TES6	35	TD8	7k	Kec
YN	-	KRC832U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=100k	US6	33	TD3	7k	Kec
YN	-	R5325N022A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YO	-	KRC833E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=22k	TES6	35	TD8	7k	Kec
YO	-	KRC833U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=22k	US6	33	TD3	7k	Kec
YP	-	74LVC1G157GV	CMOS-Log	2-input multiplexer	SOT-457	33	Log42	7b	Nxp
YP	-	74LVC1G157GW	CMOS-Log	2-input multiplexer	SOT-363	33	Log42	7b	Nxp
YP	-	DDZX6V8CTS	Z-diode	Triple, 6.8V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
YP	-	KRC834E	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=47k	TES6	35	TD8	7k	Kec
YP	-	KRC834U	Si-npn-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=47k	US6	33	TD3	7k	Kec
YP	-	R5325N023A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YQ	-	DDZX7V5CTS	Z-diode	Triple, 7.5V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
YQ	-	R5325N024A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YR	-	DDZX8V2CTS	Z-diode	Triple, 8.2V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
YR	-	R5325N025A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YS	-	DDZX9V1CTS	Z-diode	Triple, 9.1V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
YS	-	R5325N026A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YT	-	74LVC1G175GW	CMOS-Log	Positive edge-triggered D-type flip-flop with reset	SOT-363	33	Log40	7b	Nxp
YT	-	DDZX10CTS	Z-diode	Triple, 10V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
YT	-	R5325N027A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YU	-	DDZX11CTS	Z-diode	Triple, 11V ±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
YU	-	R5325N028A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YV	-	DDZX12CTS	Z-diode	Triple, 12V ±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
YV	-	R5325N029A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YW	-	R5325N030A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.45V/2.3V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YX	-	R5325N031A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YY	-	DDZX16TS	Z-diode	Triple, 16V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
YY	-	NC7SZ00L6	CMOS-Log	2-input NAND gate	MPAK-6	33	Log1	7b	F
YY	-	R5325N032A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
YY1	-	RN2970HFE	Si-pnp-Digi	Dual, Sw, 30V, 100mA, 100mW, R1=4.7k	SOT-563	35	TD8	7b	Tos
YY2	-	RN2971HFE	Si-pnp-Digi	Dual, Sw, 30V, 100mA, 100mW, R1=10k	SOT-563	35	TD8	7b	Tos
YYA	-	RN2961	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/4.7k	US6	33	TD8	7b	Tos

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
YYA	-	RN2961FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=4.7k/4.7k	ES6	35	TD8	7b	Tos
YYB	-	RN2962	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/10k	US6	33	TD8	7b	Tos
YYB	-	RN2962FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=10k/10k	ES6	35	TD8	7b	Tos
YYC	-	RN2963	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/22k	US6	33	TD8	7b	Tos
YYC	-	RN2963FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=22k/22k	ES6	35	TD8	7b	Tos
YYD	-	RN2964	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/47k	US6	33	TD8	7b	Tos
YYD	-	RN2964FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=47k/47k	ES6	35	TD8	7b	Tos
YYE	-	RN2965	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=2.2k/47k	US6	33	TD8	7b	Tos
YYE	-	RN2965FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=2.2k/47k	ES6	35	TD8	7b	Tos
YYF	-	RN2966	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=4.7k/47k	US6	33	TD8	7b	Tos
YYF	-	RN2966FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=4.7k/47k	ES6	35	TD8	7b	Tos
YYH	-	RN2967	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=10k/47k	US6	33	TD8	7b	Tos
YYH	-	RN2967FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=10k/47k	SOT-563	35	TD8	7b	Tos
YYI	-	RN2968	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=22k/47k	US6	33	TD8	7b	Tos
YYI	-	RN2968FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=22k/47k	SOT-563	35	TD8	7b	Tos
YYJ	-	RN2969	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1/R2=47k/22k	US6	33	TD8	7b	Tos
YYJ	-	RN2969FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1/R2=47k/22k	SOT-563	35	TD8	7b	Tos
YYK	-	RN2970	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=4.7k	US6	33	TD8	7b	Tos
YYK	-	RN2970FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1=4.7k	SOT-563	35	TD8	7b	Tos
YYM	-	RN2971	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 200mW, R1=10k	US6	33	TD8	7b	Tos
YYM	-	RN2971FE	Si-pnp-Digi	Dual, Sw, 50V, 100mA, 100mW, R1=10k	SOT-563	35	TD8	7b	Tos
YZ	-	DDZX18CTS	Z-diode	Triple, 18V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
YZ	-	R5325N033A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
Z0	-	BZA420A	TVS	Quad, Vrwm=4.2V, 3.75A, 24W(1ms)	SOT-457	33	D14	7b	Phi
Z0	-	R1163D401D	LVR-IC	LDO, 4.0V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
Z00	-	KIC7WZ00FK	CMOS-Log	Dual 2-input NAND gates	US8	47	Log50	8c	Kec
Z02	-	KIC7WZ02FK	CMOS-Log	Dual 2-input NOR gates	US8	47	Log53	8c	Kec
Z04	-	KIC7WZ04FK	CMOS-Log	Triple inverters	US8	47	Log56	8c	Kec
Z05	-	KIC7WZ05FK	CMOS-Log	Triple inverters (ODO)	US8	47	Log72	8c	Kec
Z08	-	KIC7WZ08FK	CMOS-Log	Dual 2-input AND gates	US8	47	Log51	8c	Kec
Z1	-	R1163D181D5	LVR-IC	LDO, 1.85V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
Z123	-	KIC7WZ123FK	CMOS-Log	Monostable multivibrator	US8	47	Log75	8c	Kec
Z126	-	KIC7WZ126FK	CMOS-Log	Dual bus buffer with 3-state output	US8	47	Log54	8c	Kec
Z14	-	KIC7WZ14FK	CMOS-Log	Triple Schmitt-trigger inverters	US8	47	Log57	8c	Kec
Z157	-	KIC7WZ157FK	CMOS-Log	2-input multiplexer	US8	47	Log42	8c	Kec
Z2	-	74LVC2G04DW	CMOS-Log	Dual inverters	SOT-363	33	Log24	7p	Di
Z2	-	74LVC2G04W6	CMOS-Log	Dual inverters	SOT-26	33	Log24	7p	Di
Z2	-	R1163D281D5	LVR-IC	LDO, 2.85V±1.5%, 150mA, +CE, CL, AE(mode)	SON-6	vrc	VR10	7g	Ric
Z240	-	KIC7WZ240FK	CMOS-Log	Dual bus buffer inverted with 3-state output	US8	47	Log67	8c	Kec
Z241	-	KIC7WZ241FK	CMOS-Log	Dual bus buffer non-inverted with 3-state output	US8	47	Log60	8c	Kec
Z245	-	KIC7WZ245FK	CMOS-Log	Dual bus transceivers with 3-state output	US8	47	Log74	8c	Kec
Z2t	-	BZA462A	TVS	Quad, Vrwm=6.2V, 2.66A, 24W(1ms)	SOT-457	33	D14	7b	Phi
Z3	-	74LVC2G06DW	CMOS-Log	Dual inverter buffers/drivers (ODO)	SOT-26	33	Log25	7p	Di
Z3	-	74LVC2G06W6	CMOS-Log	Dual inverter buffers/drivers (ODO)	SOT-26	33	Log25	7p	Di
Z32	-	KIC7WZ32FK	CMOS-Log	Dual 2-input OR gates	US8	47	Log52	8c	Kec
Z34	-	KIC7WZ34FK	CMOS-Log	Triple non-inverter buffers	US8	47	Log69	8c	Kec
Z38	-	KIC7WZ38FK	CMOS-Log	Dual 2-input NAND gate (ODO)	US8	47	Log62	8c	Kec
Z4	-	74AUP2G07DW	CMOS-Log	Dual noninverting buffers/drivers (ODO)	SOT-363	33	Log26	7p	Di
Z4	-	74AUP2G07W6	CMOS-Log	Dual noninverting buffers/drivers (ODO)	SOT-26	33	Log26	7p	Di
Z5	-	74LVC2G14DW	CMOS-Log	Dual Schmitt-trigger inverter buffers	SOT-26	33	Log34	7p	Di
Z5	-	74LVC2G14W6	CMOS-Log	Dual Schmitt-trigger inverter buffers	SOT-26	33	Log34	7p	Di
Z6	-	74LVC2G17DW	CMOS-Log	Dual Schmitt-trigger buffers	SOT-363	33	Log27	7p	Di
Z6	-	74LVC2G17W6	CMOS-Log	Dual Schmitt-trigger buffers	SOT-26	33	Log27	7p	Di
Z6	-	BZA456A	TVS	Quad, Vrwm=5.6V, 3A, 24W(1ms)	SOT-457	33	D14	7b	Phi
Z64	-	LM4864MM	Lin-IC	AF PA, BTL, 2.7..5.5V, 725mW(5V/8Ω), shutdown	SSOP-8	47	AFP12	8d	Nsc
Z65	-	LM4865MM	Lin-IC	AF PA, BTL, 2.7..5.5V, 750mW(5V/8Ω), DC volume	SSOP-8	47	AFP13	8d	Nsc
Z7	-	74LVC2G34DW	CMOS-Log	Dual non-inverter buffers	SOT-363	33	Log23	7p	Di
Z7	-	74LVC2G34W6	CMOS-Log	Dual non-inverter buffers	SOT-26	33	Log23	7p	Di
Z74	-	KIC7WZ74FK	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	US8	47	Log59	8c	Kec
Z8	-	BZA408B	TVS	Quad, Vrwm=5V, 2A, 20W(1ms)	SOT-457	33	D14	7b	Phi
Z82	-	LM4882MM	Lin-IC	AF PA, 2.4..5.5V, 250mW(8Ω), shutdown	SSOP-8	47	AFP18	8d	Nsc
Z86	-	KIC7WZ86FK	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	US8	47	Log65	8c	Kec
ZA	-	R5326N025B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.85V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
ZB	-	R5326N025A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.85V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
ZC	-	R5326N026B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±1%, 150mA, +CE, CL	SOT-23-6	rg	VR19	7da	Ric
ZD	-	R5326N026A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±1%, 150mA, +CE	SOT-23-6	rg	VR19	7da	Ric
ZQ	-	DDZX36TS	Z-diode	Triple, 36V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
ZR	-	DDZX43TS	Z-diode	Triple, 43V±2.5%, If=10mA, 200mW	SOT-363	33dd	-	7k	Di
ZU04	-	KIC7WZU04FK	CMOS-Log	Triple unbuffered inverters	US8	47	Log56	8c	Kec
ZZ	-	NC7S86L6	CMOS-Log	2-input EXCLUSIVE-OR gate	MPAK-6	33	Log5	7b	F

SECTION 10

BGA, DFN and QFN case SMD semiconductor components

0
1
2
3
4
5
6
7
8
9
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z







SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
+AAT	-	MAX9724AETC+	Lin-IC	AF PA, 2.7..5.5V, 2x60mW(3V/32Ω), shutdown	QFN-12	38	-	9m	Max
+AAU	-	MAX9724BETC+	Lin-IC	AF PA, 2.7..5.5V, 2x60mW(3V/32Ω), shutdown	QFN-12	38	-	9m	Max
+AAW	-	MAX9718BETB+T	Lin-IC	AF PA, BTL, 2.7..5.5V 1.4W(5V/4Ω), select shutdown	DFN-10	37	AFP20	9m	Max
+AAX	-	MAX9718CETB+T	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	DFN-10	37	AFP20	9m	Max
+AAY	-	MAX9718DETB+T	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	DFN-10	37	AFP20	9m	Max
+ABJ	-	MAX9724CETC+	Lin-IC	AF PA, 2.7..5.5V, 2x60mW(3V/32Ω), shutdown	QFN-12	38	-	9m	Max
+ABK	-	MAX9724DETC+	Lin-IC	AF PA, 2.7..5.5V, 2x60mW(3V/32Ω), shutdown	QFN-12	38	-	9m	Max
+ADH	-	MAX9724AEBC+T	Lin-IC	AF PA, 2.7..5.5V, 2x60mW(3V/32Ω), shutdown	BGA-12	39	-	9m	Max
+ADI	-	MAX9724BEBC+T	Lin-IC	AF PA, 2.7..5.5V, 2x60mW(3V/32Ω), shutdown	BGA-12	39	-	9m	Max
+ADX	-	MAX9718BEBL+TG45	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	BGA-9	39	AFP54	9m	Max
+ADZ	-	MAX9718CEBL+TG45	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	BGA-9	39	AFP54	9m	Max
+AEA	-	MAX9718DEBL+TG45	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	BGA-9	39	AFP54	9m	Max
+AEH	-	MAX9724DEBC+T	Lin-IC	AF PA, 2.7..5.5V, 2x60mW(3V/32Ω), shutdown	BGA-12	39	-	9m	Max
+AEV	-	MAX98306ETD+	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x3.7W(5V/4Ω), shutdown	DFN-14	37	-	9a	Max
+AFB	-	MAX9718EEBL+TG45	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	BGA-9	39	AFP54	9m	Max
+AFC	-	MAX9718FEBL+TG45	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	BGA-9	39	AFP54	9m	Max
+AFD	-	MAX9718GEBL+TG45	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	BGA-9	39	AFP54	9m	Max
+AFE	-	MAX9718HEBL+TG45	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	BGA-9	39	AFP54	9m	Max
+AGE	-	MAX9724CEBC+T	Lin-IC	AF PA, 2.7..5.5V, 2x60mW(3V/32Ω), shutdown	BGA-12	39	-	9m	Max
+AIN	-	MAX98307ETE+	Lin-IC	AF PA, BTL, class-D, 2.7..6.6V, 3.3W(5V/3Ω), shutdown	QFN-16	38	-	9a	Max
+AIY	-	MAX98309EWL+	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), shutdown	BGA-9	39	-	9a	Max
+AIZ	-	MAX98310EWL+	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), shutdown	BGA-9	39	-	9a	Max
+ASY	-	MAX9718EETB+T	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	DFN-10	37	AFP20	9m	Max
+ASZ	-	MAX9718FETB+T	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	DFN-10	37	AFP20	9m	Max
+ATA	-	MAX9718GETB+T	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	DFN-10	37	AFP20	9m	Max
+ATB	-	MAX9718HETB+T	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	DFN-10	37	AFP20	9m	Max
00	-	RP110L081B	LVR-IC	LDO, 0.8V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
00	-	XC6224A0817R	LVR-IC	LDO, 0.8V±20mV, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
00	-	XC6229D1211R-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
01	-	RP110L091B	LVR-IC	LDO, 0.9V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
01	-	TS4601EIJT	Lin-IC	AF PA, 2.7..5.5V, 2x75mW(5V/16Ω), stand-by, I2C	BGA-16	39	-	9p	Ste
01	-	XC6224A0917R	LVR-IC	LDO, 0.9V±20mV, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
01	-	XC6229D12B1R-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
01	-	XC6420AB017R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/1.20V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
01	-	XC6420AB01DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/1.20V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
011	-	EC49222-1-F	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
0113	-	XC6201132DR	LVR-IC	1.3V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0114	-	XC6201142DR	LVR-IC	1.4V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0115	-	XC6201152DR	LVR-IC	1.5V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0116	-	XC6201162DR	LVR-IC	1.6V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0117	-	XC6201172DR	LVR-IC	1.7V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0118	-	XC6201182DR	LVR-IC	1.8V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0119	-	XC6201192DR	LVR-IC	1.9V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
012	-	EC49222-2-F	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
0120	-	XC6201202DR	LVR-IC	2.0V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0121	-	XC6201212DR	LVR-IC	2.1V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0122	-	XC6201222DR	LVR-IC	2.2V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0123	-	XC6201232DR	LVR-IC	2.3V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0124	-	XC6201242DR	LVR-IC	2.4V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0125	-	XC6201252DR	LVR-IC	2.5V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0126	-	XC6201262DR	LVR-IC	2.6V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0127	-	XC6201272DR	LVR-IC	2.7V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0128	-	XC6201282DR	LVR-IC	2.8V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0129	-	XC6201292DR	LVR-IC	2.9V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
013	-	EC49222-3-F	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
0130	-	XC6201302DR	LVR-IC	3.0V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0131	-	XC6201312DR	LVR-IC	3.1V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0132	-	XC6201322DR	LVR-IC	3.2V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0133	-	XC6201332DR	LVR-IC	3.3V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0134	-	XC6201342DR	LVR-IC	3.4V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0135	-	XC6201352DR	LVR-IC	3.5V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0136	-	XC6201362DR	LVR-IC	3.6V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0137	-	XC6201372DR	LVR-IC	3.7V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0138	-	XC6201382DR	LVR-IC	3.8V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0139	-	XC6201392DR	LVR-IC	3.9V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
014	-	EC49222-4-F	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
0140	-	XC6201402DR	LVR-IC	4.0V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0141	-	XC6201412DR	LVR-IC	4.1V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0142	-	XC6201422DR	LVR-IC	4.2V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0143	-	XC6201432DR	LVR-IC	4.3V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0144	-	XC6201442DR	LVR-IC	4.4V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0145	-	XC6201452DR	LVR-IC	4.5V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0146	-	XC6201462DR	LVR-IC	4.6V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0147	-	XC6201472DR	LVR-IC	4.7V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0148	-	XC6201482DR	LVR-IC	4.8V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0149	-	XC6201492DR	LVR-IC	4.9V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0150	-	XC6201502DR	LVR-IC	5.0V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0151	-	XC6201512DR	LVR-IC	5.1V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0152	-	XC6201522DR	LVR-IC	5.2V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0153	-	XC6201532DR	LVR-IC	5.3V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0154	-	XC6201542DR	LVR-IC	5.4V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0155	-	XC6201552DR	LVR-IC	5.5V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0156	-	XC6201562DR	LVR-IC	5.6V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0157	-	XC6201572DR	LVR-IC	5.7V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0158	-	XC6201582DR	LVR-IC	5.8V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0159	-	XC6201592DR	LVR-IC	5.9V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
0160	-	XC6201602DR	LVR-IC	6.0V±2%, 250mA	USP-6B	49hs	VR1	9b	Tor
01A	-	EC49222-A-F	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01B	-	EC49222-B-F	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01C	-	EC49222-C-F	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01D	-	EC49222-D-F	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01E	-	EC49222-E-F	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01F	-	EC49222-F-F	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01G	-	EC49222-G-F	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01H	-	EC49222-H-F	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01J	-	EC49222-J-F	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01K	-	EC49222-K-F	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01L	-	EC49222-L-F	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01M	-	EC49222-M-F	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01N	-	EC49222-N-F	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01P	-	EC49222-P-F	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01Q	-	EC49222-Q-F	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01R	-	EC49222-R-F	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01S	-	EC49222-S-F	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01T	-	EC49222-T-F	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01U	-	EC49222-U-F	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01V	-	EC49222-V-F	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
01W	-	EC49222-W-F	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 250mA, +CE	UFN-6	56xv	VR19	9i	Ecm
02	-	RP110L101B	LVR-IC	LDO, 1.0V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
02	-	XC6223A1219R-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
02	-	XC6224A1017R	LVR-IC	LDO, 1.0V±20mV, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
02	-	XC6229D1311R-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
02	-	XC6420AB027R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/1.50V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
02	-	XC6420AB02DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/1.50V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
024	-	FAN7024MPX	Lin-IC	AF PA, BTL, 2.3..5.5V, 675mW(5V/8Ω), shutdown	DFN-10	37	AFP15	9a	F
02P18	-	XC6202P182DR	LVR-IC	LDO, 1.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P19	-	XC6202P192DR	LVR-IC	LDO, 1.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P20	-	XC6202P202DR	LVR-IC	LDO, 2.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P21	-	XC6202P212DR	LVR-IC	LDO, 2.1V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P22	-	XC6202P222DR	LVR-IC	LDO, 2.2V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P23	-	XC6202P232DR	LVR-IC	LDO, 2.3V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P24	-	XC6202P242DR	LVR-IC	LDO, 2.4V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P25	-	XC6202P252DR	LVR-IC	LDO, 2.5V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P26	-	XC6202P262DR	LVR-IC	LDO, 2.6V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P27	-	XC6202P272DR	LVR-IC	LDO, 2.7V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P28	-	XC6202P282DR	LVR-IC	LDO, 2.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P29	-	XC6202P292DR	LVR-IC	LDO, 2.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P30	-	XC6202P302DR	LVR-IC	LDO, 3.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P31	-	XC6202P312DR	LVR-IC	LDO, 3.1V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P32	-	XC6202P322DR	LVR-IC	LDO, 3.2V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P33	-	XC6202P332DR	LVR-IC	LDO, 3.3V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P34	-	XC6202P342DR	LVR-IC	LDO, 3.4V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P35	-	XC6202P352DR	LVR-IC	LDO, 3.5V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P36	-	XC6202P362DR	LVR-IC	LDO, 3.6V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P37	-	XC6202P372DR	LVR-IC	LDO, 3.7V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P38	-	XC6202P382DR	LVR-IC	LDO, 3.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P39	-	XC6202P392DR	LVR-IC	LDO, 3.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P40	-	XC6202P402DR	LVR-IC	LDO, 4.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P41	-	XC6202P412DR	LVR-IC	LDO, 4.1V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P42	-	XC6202P422DR	LVR-IC	LDO, 4.2V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
02P43	-	XC6202P432DR	LVR-IC	LDO, 4.3V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P44	-	XC6202P442DR	LVR-IC	LDO, 4.4V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P45	-	XC6202P452DR	LVR-IC	LDO, 4.5V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P46	-	XC6202P462DR	LVR-IC	LDO, 4.6V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P47	-	XC6202P472DR	LVR-IC	LDO, 4.7V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P48	-	XC6202P482DR	LVR-IC	LDO, 4.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P49	-	XC6202P492DR	LVR-IC	LDO, 4.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P50	-	XC6202P502DR	LVR-IC	LDO, 5.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P51	-	XC6202P512DR	LVR-IC	LDO, 5.1V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P52	-	XC6202P522DR	LVR-IC	LDO, 5.2V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P53	-	XC6202P532DR	LVR-IC	LDO, 5.3V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P54	-	XC6202P542DR	LVR-IC	LDO, 5.4V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P55	-	XC6202P552DR	LVR-IC	LDO, 5.5V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P56	-	XC6202P562DR	LVR-IC	LDO, 5.6V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P57	-	XC6202P572DR	LVR-IC	LDO, 5.7V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P58	-	XC6202P582DR	LVR-IC	LDO, 5.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P59	-	XC6202P592DR	LVR-IC	LDO, 5.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P60	-	XC6202P602DR	LVR-IC	LDO, 6.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P61	-	XC6202P612DR	LVR-IC	LDO, 6.1V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P62	-	XC6202P622DR	LVR-IC	LDO, 6.2V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P63	-	XC6202P632DR	LVR-IC	LDO, 6.3V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P64	-	XC6202P642DR	LVR-IC	LDO, 6.4V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P65	-	XC6202P652DR	LVR-IC	LDO, 6.5V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P66	-	XC6202P662DR	LVR-IC	LDO, 6.6V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P67	-	XC6202P672DR	LVR-IC	LDO, 6.7V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P68	-	XC6202P682DR	LVR-IC	LDO, 6.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P69	-	XC6202P692DR	LVR-IC	LDO, 6.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P70	-	XC6202P702DR	LVR-IC	LDO, 7.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P71	-	XC6202P712DR	LVR-IC	LDO, 7.1V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P72	-	XC6202P722DR	LVR-IC	LDO, 7.2V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P73	-	XC6202P732DR	LVR-IC	LDO, 7.3V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P74	-	XC6202P742DR	LVR-IC	LDO, 7.4V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P75	-	XC6202P752DR	LVR-IC	LDO, 7.5V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P76	-	XC6202P762DR	LVR-IC	LDO, 7.6V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P77	-	XC6202P772DR	LVR-IC	LDO, 7.7V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P78	-	XC6202P782DR	LVR-IC	LDO, 7.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P79	-	XC6202P792DR	LVR-IC	LDO, 7.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P80	-	XC6202P802DR	LVR-IC	LDO, 8.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P81	-	XC6202P812DR	LVR-IC	LDO, 8.1V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P82	-	XC6202P822DR	LVR-IC	LDO, 8.2V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P83	-	XC6202P832DR	LVR-IC	LDO, 8.3V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P84	-	XC6202P842DR	LVR-IC	LDO, 8.4V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P85	-	XC6202P852DR	LVR-IC	LDO, 8.5V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P86	-	XC6202P862DR	LVR-IC	LDO, 8.6V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P87	-	XC6202P872DR	LVR-IC	LDO, 8.7V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P88	-	XC6202P882DR	LVR-IC	LDO, 8.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P89	-	XC6202P892DR	LVR-IC	LDO, 8.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P90	-	XC6202P902DR	LVR-IC	LDO, 9.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P91	-	XC6202P912DR	LVR-IC	LDO, 9.1V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P92	-	XC6202P922DR	LVR-IC	LDO, 9.2V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P93	-	XC6202P932DR	LVR-IC	LDO, 9.3V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P94	-	XC6202P942DR	LVR-IC	LDO, 9.4V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P95	-	XC6202P952DR	LVR-IC	LDO, 9.5V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P96	-	XC6202P962DR	LVR-IC	LDO, 9.6V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P97	-	XC6202P972DR	LVR-IC	LDO, 9.7V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P98	-	XC6202P982DR	LVR-IC	LDO, 9.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02P99	-	XC6202P992DR	LVR-IC	LDO, 9.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PA0	-	XC6202PA02DR	LVR-IC	LDO, 10.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PA1	-	XC6202PA12DR	LVR-IC	LDO, 10.1V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PA2	-	XC6202PA22DR	LVR-IC	LDO, 10.2V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PA3	-	XC6202PA32DR	LVR-IC	LDO, 10.3V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PA4	-	XC6202PA42DR	LVR-IC	LDO, 10.4V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PA5	-	XC6202PA52DR	LVR-IC	LDO, 10.5V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PA6	-	XC6202PA62DR	LVR-IC	LDO, 10.6V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PA7	-	XC6202PA72DR	LVR-IC	LDO, 10.7V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PA8	-	XC6202PA82DR	LVR-IC	LDO, 10.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PA9	-	XC6202PA92DR	LVR-IC	LDO, 10.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PB0	-	XC6202PB02DR	LVR-IC	LDO, 11.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PB1	-	XC6202PB12DR	LVR-IC	LDO, 11.1V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PB2	-	XC6202PB22DR	LVR-IC	LDO, 11.2V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
02PB3	-	XC6202PB32DR	LVR-IC	LDO, 11.3V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PB4	-	XC6202PB42DR	LVR-IC	LDO, 11.4V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PB5	-	XC6202PB52DR	LVR-IC	LDO, 11.5V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PB6	-	XC6202PB62DR	LVR-IC	LDO, 11.6V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PB7	-	XC6202PB72DR	LVR-IC	LDO, 11.7V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PB8	-	XC6202PB82DR	LVR-IC	LDO, 11.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PB9	-	XC6202PB92DR	LVR-IC	LDO, 11.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PC0	-	XC6202PC02DR	LVR-IC	LDO, 12.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PC1	-	XC6202PC12DR	LVR-IC	LDO, 12.1V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PC2	-	XC6202PC22DR	LVR-IC	LDO, 12.2V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PC3	-	XC6202PC32DR	LVR-IC	LDO, 12.3V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PC4	-	XC6202PC42DR	LVR-IC	LDO, 12.4V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PC5	-	XC6202PC52DR	LVR-IC	LDO, 12.5V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PC6	-	XC6202PC62DR	LVR-IC	LDO, 12.6V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PC7	-	XC6202PC72DR	LVR-IC	LDO, 12.7V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PC8	-	XC6202PC82DR	LVR-IC	LDO, 12.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PC9	-	XC6202PC92DR	LVR-IC	LDO, 12.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PD0	-	XC6202PD02DR	LVR-IC	LDO, 13.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PD1	-	XC6202PD12DR	LVR-IC	LDO, 13.1V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PD2	-	XC6202PD22DR	LVR-IC	LDO, 13.2V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PD3	-	XC6202PD32DR	LVR-IC	LDO, 13.3V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PD4	-	XC6202PD42DR	LVR-IC	LDO, 13.4V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PD5	-	XC6202PD52DR	LVR-IC	LDO, 13.5V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PD6	-	XC6202PD62DR	LVR-IC	LDO, 13.6V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PD7	-	XC6202PD72DR	LVR-IC	LDO, 13.7V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PD8	-	XC6202PD82DR	LVR-IC	LDO, 13.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PD9	-	XC6202PD92DR	LVR-IC	LDO, 13.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PE0	-	XC6202PE02DR	LVR-IC	LDO, 14.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PE1	-	XC6202PE12DR	LVR-IC	LDO, 14.1V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PE2	-	XC6202PE22DR	LVR-IC	LDO, 14.2V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PE3	-	XC6202PE32DR	LVR-IC	LDO, 14.3V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PE4	-	XC6202PE42DR	LVR-IC	LDO, 14.4V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PE5	-	XC6202PE52DR	LVR-IC	LDO, 14.5V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PE6	-	XC6202PE62DR	LVR-IC	LDO, 14.6V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PE7	-	XC6202PE72DR	LVR-IC	LDO, 14.7V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PE8	-	XC6202PE82DR	LVR-IC	LDO, 14.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PE9	-	XC6202PE92DR	LVR-IC	LDO, 14.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PF0	-	XC6202PF02DR	LVR-IC	LDO, 15.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PF1	-	XC6202PF12DR	LVR-IC	LDO, 15.1V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PF2	-	XC6202PF22DR	LVR-IC	LDO, 15.2V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PF3	-	XC6202PF32DR	LVR-IC	LDO, 15.3V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PF4	-	XC6202PF42DR	LVR-IC	LDO, 15.4V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PF5	-	XC6202PF52DR	LVR-IC	LDO, 15.5V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PF6	-	XC6202PF62DR	LVR-IC	LDO, 15.6V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PF7	-	XC6202PF72DR	LVR-IC	LDO, 15.7V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PF8	-	XC6202PF82DR	LVR-IC	LDO, 15.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PF9	-	XC6202PF92DR	LVR-IC	LDO, 15.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PG0	-	XC6202PG02DR	LVR-IC	LDO, 16.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PG1	-	XC6202PG12DR	LVR-IC	LDO, 16.1V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PG2	-	XC6202PG22DR	LVR-IC	LDO, 16.2V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PG3	-	XC6202PG32DR	LVR-IC	LDO, 16.3V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PG4	-	XC6202PG42DR	LVR-IC	LDO, 16.4V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PG5	-	XC6202PG52DR	LVR-IC	LDO, 16.5V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PG6	-	XC6202PG62DR	LVR-IC	LDO, 16.6V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PG7	-	XC6202PG72DR	LVR-IC	LDO, 16.7V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PG8	-	XC6202PG82DR	LVR-IC	LDO, 16.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PG9	-	XC6202PG92DR	LVR-IC	LDO, 16.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PH0	-	XC6202PH02DR	LVR-IC	LDO, 17.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PH1	-	XC6202PH12DR	LVR-IC	LDO, 17.1V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PH2	-	XC6202PH22DR	LVR-IC	LDO, 17.2V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PH3	-	XC6202PH32DR	LVR-IC	LDO, 17.3V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PH4	-	XC6202PH42DR	LVR-IC	LDO, 17.4V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PH5	-	XC6202PH52DR	LVR-IC	LDO, 17.5V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PH6	-	XC6202PH62DR	LVR-IC	LDO, 17.6V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PH7	-	XC6202PH72DR	LVR-IC	LDO, 17.7V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PH8	-	XC6202PH82DR	LVR-IC	LDO, 17.8V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PH9	-	XC6202PH92DR	LVR-IC	LDO, 17.9V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
02PJ0	-	XC6202PJ02DR	LVR-IC	LDO, 18.0V±2%, 150mA	USP-6B	49hs	VR1	9b	Tor
03	-	RP110L111B	LVR-IC	LDO, 1.1V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
03	-	XC6223A1319R-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
03	-	XC6224A1117R	LVR-IC	LDO, 1.1V±20mV, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
03	-	XC6229D13B1R-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
03	-	XC6420AB037R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/2.50V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
03	-	XC6420AB03DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/2.50V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
04	-	RP110L121B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
04	-	XC6221C1217R	LVR-IC	LDO, 1.2V±20mV, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
04	-	XC6223A1419R-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
04	-	XC6224A1217R	LVR-IC	LDO, 1.2V±20mV, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
04	-	XC6229D1411R-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
04	-	XC6420AB047R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/2.85V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
04	-	XC6420AB04DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/2.85V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
0410	-	Si2704-A10-GM	Lin-IC	AF PA, BTL, class-D, 2.7..6.6V, 5W(5V/3Ω), shutdown, I2C	QFN-24	38	-	9m	Slb
04A18	-	XC6204A182DR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A19	-	XC6204A192DR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A1L	-	XC6204A18ADR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A1M	-	XC6204A19ADR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A20	-	XC6204A202DR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A21	-	XC6204A212DR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A22	-	XC6204A222DR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A23	-	XC6204A232DR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A24	-	XC6204A242DR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A25	-	XC6204A252DR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A26	-	XC6204A262DR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A27	-	XC6204A272DR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A28	-	XC6204A282DR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A29	-	XC6204A292DR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A2A	-	XC6204A20ADR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A2B	-	XC6204A21ADR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A2C	-	XC6204A22ADR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A2D	-	XC6204A23ADR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A2E	-	XC6204A24ADR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A2F	-	XC6204A25ADR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A2H	-	XC6204A26ADR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A2K	-	XC6204A27ADR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A2L	-	XC6204A28ADR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A2M	-	XC6204A29ADR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A30	-	XC6204A302DR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A31	-	XC6204A312DR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A32	-	XC6204A322DR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A33	-	XC6204A332DR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A34	-	XC6204A342DR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A35	-	XC6204A352DR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A36	-	XC6204A362DR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A37	-	XC6204A372DR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A38	-	XC6204A382DR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A39	-	XC6204A392DR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A3A	-	XC6204A30ADR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A3B	-	XC6204A31ADR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A3C	-	XC6204A32ADR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A3D	-	XC6204A33ADR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A3E	-	XC6204A34ADR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A3F	-	XC6204A35ADR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A3H	-	XC6204A36ADR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A3K	-	XC6204A37ADR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A3L	-	XC6204A38ADR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A3M	-	XC6204A39ADR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A40	-	XC6204A402DR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A41	-	XC6204A412DR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A42	-	XC6204A422DR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A43	-	XC6204A432DR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A44	-	XC6204A442DR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A45	-	XC6204A452DR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A46	-	XC6204A462DR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A47	-	XC6204A472DR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A48	-	XC6204A482DR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A49	-	XC6204A492DR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A4A	-	XC6204A40ADR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A4B	-	XC6204A41ADR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A4C	-	XC6204A42ADR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A4D	-	XC6204A43ADR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
04A4E	-	XC6204A44ADR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A4F	-	XC6204A45ADR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A4H	-	XC6204A46ADR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A4K	-	XC6204A47ADR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A4L	-	XC6204A48ADR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A4M	-	XC6204A49ADR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A50	-	XC6204A502DR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A51	-	XC6204A512DR	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A52	-	XC6204A522DR	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A53	-	XC6204A532DR	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A54	-	XC6204A542DR	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A55	-	XC6204A552DR	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A56	-	XC6204A562DR	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A57	-	XC6204A572DR	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A58	-	XC6204A582DR	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A59	-	XC6204A592DR	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A5A	-	XC6204A50ADR	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A5B	-	XC6204A51ADR	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A5C	-	XC6204A52ADR	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A5D	-	XC6204A53ADR	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A5E	-	XC6204A54ADR	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A5F	-	XC6204A55ADR	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A5H	-	XC6204A56ADR	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A5K	-	XC6204A57ADR	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A5L	-	XC6204A58ADR	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A5M	-	XC6204A59ADR	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04A60	-	XC6204A602DR	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
04B18	-	XC6204B182DR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B19	-	XC6204B192DR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B1L	-	XC6204B18ADR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B1M	-	XC6204B19ADR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B20	-	XC6204B202DR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B21	-	XC6204B212DR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B22	-	XC6204B222DR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B23	-	XC6204B232DR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B24	-	XC6204B242DR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B25	-	XC6204B252DR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B26	-	XC6204B262DR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B27	-	XC6204B272DR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B28	-	XC6204B282DR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B29	-	XC6204B292DR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B2A	-	XC6204B20ADR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B2B	-	XC6204B21ADR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B2C	-	XC6204B22ADR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B2D	-	XC6204B23ADR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B2E	-	XC6204B24ADR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B2F	-	XC6204B25ADR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B2H	-	XC6204B26ADR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B2K	-	XC6204B27ADR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B2L	-	XC6204B28ADR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B2M	-	XC6204B29ADR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B30	-	XC6204B302DR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B31	-	XC6204B312DR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B32	-	XC6204B322DR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B33	-	XC6204B332DR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B34	-	XC6204B342DR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B35	-	XC6204B352DR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B36	-	XC6204B362DR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B37	-	XC6204B372DR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B38	-	XC6204B382DR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B39	-	XC6204B392DR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B3A	-	XC6204B30ADR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B3B	-	XC6204B31ADR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B3C	-	XC6204B32ADR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B3D	-	XC6204B33ADR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B3E	-	XC6204B34ADR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B3F	-	XC6204B35ADR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B3H	-	XC6204B36ADR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B3K	-	XC6204B37ADR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B3L	-	XC6204B38ADR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
04B3M	-	XC6204B39ADR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B40	-	XC6204B402DR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B41	-	XC6204B412DR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B42	-	XC6204B422DR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B43	-	XC6204B432DR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B44	-	XC6204B442DR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B45	-	XC6204B452DR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B46	-	XC6204B462DR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B47	-	XC6204B472DR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B48	-	XC6204B482DR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B49	-	XC6204B492DR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B4A	-	XC6204B40ADR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B4B	-	XC6204B41ADR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B4C	-	XC6204B42ADR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B4D	-	XC6204B43ADR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B4E	-	XC6204B44ADR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B4F	-	XC6204B45ADR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B4H	-	XC6204B46ADR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B4K	-	XC6204B47ADR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B4L	-	XC6204B48ADR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B4M	-	XC6204B49ADR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B50	-	XC6204B502DR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B51	-	XC6204B512DR	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B52	-	XC6204B522DR	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B53	-	XC6204B532DR	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B54	-	XC6204B542DR	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B55	-	XC6204B552DR	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B56	-	XC6204B562DR	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B57	-	XC6204B572DR	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B58	-	XC6204B582DR	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B59	-	XC6204B592DR	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B5A	-	XC6204B50ADR	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B5B	-	XC6204B51ADR	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B5C	-	XC6204B52ADR	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B5D	-	XC6204B53ADR	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B5E	-	XC6204B54ADR	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B5F	-	XC6204B55ADR	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B5H	-	XC6204B56ADR	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B5K	-	XC6204B57ADR	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B5L	-	XC6204B58ADR	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B5M	-	XC6204B59ADR	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04B60	-	XC6204B602DR	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
04C18	-	XC6204C182DR	LVR-IC	LDO, 1.8V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C19	-	XC6204C192DR	LVR-IC	LDO, 1.9V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C1L	-	XC6204C18ADR	LVR-IC	LDO, 1.85V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C1M	-	XC6204C19ADR	LVR-IC	LDO, 1.95V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C20	-	XC6204C202DR	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C21	-	XC6204C212DR	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C22	-	XC6204C222DR	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C23	-	XC6204C232DR	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C24	-	XC6204C242DR	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C25	-	XC6204C252DR	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C26	-	XC6204C262DR	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C27	-	XC6204C272DR	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C28	-	XC6204C282DR	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C29	-	XC6204C292DR	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C2A	-	XC6204C20ADR	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C2B	-	XC6204C21ADR	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C2C	-	XC6204C22ADR	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C2D	-	XC6204C23ADR	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C2E	-	XC6204C24ADR	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C2F	-	XC6204C25ADR	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C2H	-	XC6204C26ADR	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C2K	-	XC6204C27ADR	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C2L	-	XC6204C28ADR	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C2M	-	XC6204C29ADR	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C30	-	XC6204C302DR	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C31	-	XC6204C312DR	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C32	-	XC6204C322DR	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C33	-	XC6204C332DR	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
04C34	-	XC6204C342DR	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C35	-	XC6204C352DR	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C36	-	XC6204C362DR	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C37	-	XC6204C372DR	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C38	-	XC6204C382DR	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C39	-	XC6204C392DR	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C3A	-	XC6204C30ADR	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C3B	-	XC6204C31ADR	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C3C	-	XC6204C32ADR	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C3D	-	XC6204C33ADR	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C3E	-	XC6204C34ADR	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C3F	-	XC6204C35ADR	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C3H	-	XC6204C36ADR	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C3K	-	XC6204C37ADR	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C3L	-	XC6204C38ADR	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C3M	-	XC6204C39ADR	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C40	-	XC6204C402DR	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C41	-	XC6204C412DR	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C42	-	XC6204C422DR	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C43	-	XC6204C432DR	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C44	-	XC6204C442DR	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C45	-	XC6204C452DR	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C46	-	XC6204C462DR	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C47	-	XC6204C472DR	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C48	-	XC6204C482DR	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C49	-	XC6204C492DR	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C4A	-	XC6204C40ADR	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C4B	-	XC6204C41ADR	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C4C	-	XC6204C42ADR	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C4D	-	XC6204C43ADR	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C4E	-	XC6204C44ADR	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C4F	-	XC6204C45ADR	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C4H	-	XC6204C46ADR	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C4K	-	XC6204C47ADR	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C4L	-	XC6204C48ADR	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C4M	-	XC6204C49ADR	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C50	-	XC6204C502DR	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C51	-	XC6204C512DR	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C52	-	XC6204C522DR	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C53	-	XC6204C532DR	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C54	-	XC6204C542DR	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C55	-	XC6204C552DR	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C56	-	XC6204C562DR	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C57	-	XC6204C572DR	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C58	-	XC6204C582DR	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C59	-	XC6204C592DR	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C5A	-	XC6204C50ADR	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C5B	-	XC6204C51ADR	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C5C	-	XC6204C52ADR	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C5D	-	XC6204C53ADR	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C5E	-	XC6204C54ADR	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C5F	-	XC6204C55ADR	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C5H	-	XC6204C56ADR	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C5K	-	XC6204C57ADR	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C5L	-	XC6204C58ADR	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C5M	-	XC6204C59ADR	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04C60	-	XC6204C602DR	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
04D18	-	XC6204D182DR	LVR-IC	LDO, 1.8V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D19	-	XC6204D192DR	LVR-IC	LDO, 1.9V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D1L	-	XC6204D18ADR	LVR-IC	LDO, 1.85V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D1M	-	XC6204D19ADR	LVR-IC	LDO, 1.95V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D20	-	XC6204D202DR	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D21	-	XC6204D212DR	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D22	-	XC6204D222DR	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D23	-	XC6204D232DR	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D24	-	XC6204D242DR	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D25	-	XC6204D252DR	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D26	-	XC6204D262DR	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D27	-	XC6204D272DR	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D28	-	XC6204D282DR	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
04D29	-	XC6204D292DR	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D2A	-	XC6204D20ADR	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D2B	-	XC6204D21ADR	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D2C	-	XC6204D22ADR	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D2D	-	XC6204D23ADR	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D2E	-	XC6204D24ADR	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D2F	-	XC6204D25ADR	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D2H	-	XC6204D26ADR	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D2K	-	XC6204D27ADR	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D2L	-	XC6204D28ADR	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D2M	-	XC6204D29ADR	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D30	-	XC6204D302DR	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D31	-	XC6204D312DR	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D32	-	XC6204D322DR	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D33	-	XC6204D332DR	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D34	-	XC6204D342DR	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D35	-	XC6204D352DR	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D36	-	XC6204D362DR	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D37	-	XC6204D372DR	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D38	-	XC6204D382DR	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D39	-	XC6204D392DR	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D3A	-	XC6204D30ADR	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D3B	-	XC6204D31ADR	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D3C	-	XC6204D32ADR	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D3D	-	XC6204D33ADR	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D3E	-	XC6204D34ADR	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D3F	-	XC6204D35ADR	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D3H	-	XC6204D36ADR	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D3K	-	XC6204D37ADR	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D3L	-	XC6204D38ADR	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D3M	-	XC6204D39ADR	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D40	-	XC6204D402DR	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D41	-	XC6204D412DR	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D42	-	XC6204D422DR	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D43	-	XC6204D432DR	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D44	-	XC6204D442DR	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D45	-	XC6204D452DR	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D46	-	XC6204D462DR	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D47	-	XC6204D472DR	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D48	-	XC6204D482DR	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D49	-	XC6204D492DR	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D4A	-	XC6204D40ADR	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D4B	-	XC6204D41ADR	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D4C	-	XC6204D42ADR	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D4D	-	XC6204D43ADR	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D4E	-	XC6204D44ADR	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D4F	-	XC6204D45ADR	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D4H	-	XC6204D46ADR	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D4K	-	XC6204D47ADR	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D4L	-	XC6204D48ADR	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D4M	-	XC6204D49ADR	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D50	-	XC6204D502DR	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D51	-	XC6204D512DR	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D52	-	XC6204D522DR	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D53	-	XC6204D532DR	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D54	-	XC6204D542DR	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D55	-	XC6204D552DR	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D56	-	XC6204D562DR	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D57	-	XC6204D572DR	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D58	-	XC6204D582DR	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D59	-	XC6204D592DR	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D5A	-	XC6204D50ADR	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D5B	-	XC6204D51ADR	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D5C	-	XC6204D52ADR	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D5D	-	XC6204D53ADR	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D5E	-	XC6204D54ADR	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D5F	-	XC6204D55ADR	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D5H	-	XC6204D56ADR	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D5K	-	XC6204D57ADR	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D5L	-	XC6204D58ADR	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
04D5M	-	XC6204D59ADR	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
04D60	-	XC6204D602DR	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05	-	RP110L121B5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
05	-	XC6221C1317R	LVR-IC	LDO, 1.3V±20mV, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
05	-	XC6223A1519R-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
05	-	XC6224A1317R	LVR-IC	LDO, 1.3V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
05	-	XC6229D14B1R-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
05	-	XC6420AB057R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/3.00V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
05	-	XC6420AB05DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/3.00V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
0510	-	Si2705-A10-GM	Lin-IC	AF PA, BTL, class-D, 2.7..6.6V, 5W(5V/3Ω), shutdown, I2C	QFN-24	38	-	9m	Slb
05A09	-	XC6205A092DR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A0M	-	XC6205A09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A10	-	XC6205A102DR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A11	-	XC6205A112DR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A12	-	XC6205A122DR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A13	-	XC6205A132DR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A14	-	XC6205A142DR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A15	-	XC6205A152DR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A16	-	XC6205A162DR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A17	-	XC6205A172DR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A1A	-	XC6205A10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A1B	-	XC6205A11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A1C	-	XC6205A12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A1D	-	XC6205A13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A1E	-	XC6205A14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A1F	-	XC6205A15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A1H	-	XC6205A16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05A1K	-	XC6205A17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
05B08	-	XC6205B092DR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B0L	-	XC6205B09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B10	-	XC6205B102DR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B11	-	XC6205B112DR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B12	-	XC6205B122DR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B13	-	XC6205B132DR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B14	-	XC6205B142DR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B15	-	XC6205B152DR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B16	-	XC6205B162DR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B17	-	XC6205B172DR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B1A	-	XC6205B10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B1B	-	XC6205B11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B1C	-	XC6205B12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B1D	-	XC6205B13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B1E	-	XC6205B14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B1F	-	XC6205B15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B1H	-	XC6205B16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05B1K	-	XC6205B17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
05C09	-	XC6205C092DR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C0M	-	XC6205C09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C10	-	XC6205C102DR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C11	-	XC6205C112DR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C12	-	XC6205C122DR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C13	-	XC6205C132DR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C14	-	XC6205C142DR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C15	-	XC6205C152DR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C16	-	XC6205C162DR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C17	-	XC6205C172DR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C1A	-	XC6205C10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C1B	-	XC6205C11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C1C	-	XC6205C12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C1D	-	XC6205C13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C1E	-	XC6205C14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C1F	-	XC6205C15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C1H	-	XC6205C16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05C1K	-	XC6205C17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
05D09	-	XC6205D092DR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05D0M	-	XC6205D09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05D10	-	XC6205D102DR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05D11	-	XC6205D112DR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05D12	-	XC6205D122DR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05D13	-	XC6205D132DR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
05D14	-	XC6205D142DR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05D15	-	XC6205D152DR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05D16	-	XC6205D162DR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05D17	-	XC6205D172DR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05D1A	-	XC6205D10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05D1B	-	XC6205D11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05D1C	-	XC6205D12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05D1D	-	XC6205D13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05D1E	-	XC6205D14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05D1F	-	XC6205D15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05D1H	-	XC6205D16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
05D1K	-	XC6205D17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
06	-	RP110L131B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
06	-	XC6221C1417R	LVR-IC	LDO, 1.4V±20mV, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
06	-	XC6223A1619R-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
06	-	XC6224A1417R	LVR-IC	LDO, 1.4V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
06	-	XC6229D1511R-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
06	-	XC6420AB067R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/3.30V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
06	-	XC6420AB06DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/3.30V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
0610	-	Si2706-A10-GM	Lin-IC	AF PA, BTL, class-D, 2.7..6.6V, 5W(5V/3Ω), shutdown, I2C	QFN-24	38	-	9m	Slb
06P12	-	XC6206P122DR	LVR-IC	LDO, 1.2V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P13	-	XC6206P132DR	LVR-IC	LDO, 1.3V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P14	-	XC6206P142DR	LVR-IC	LDO, 1.4V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P15	-	XC6206P152DR	LVR-IC	LDO, 1.5V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P16	-	XC6206P162DR	LVR-IC	LDO, 1.6V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P17	-	XC6206P172DR	LVR-IC	LDO, 1.7V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P18	-	XC6206P182DR	LVR-IC	LDO, 1.8V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P19	-	XC6206P192DR	LVR-IC	LDO, 1.9V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P20	-	XC6206P202DR	LVR-IC	LDO, 2.0V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P21	-	XC6206P212DR	LVR-IC	LDO, 2.1V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P22	-	XC6206P222DR	LVR-IC	LDO, 2.2V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P23	-	XC6206P232DR	LVR-IC	LDO, 2.3V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P24	-	XC6206P242DR	LVR-IC	LDO, 2.4V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P25	-	XC6206P252DR	LVR-IC	LDO, 2.5V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P26	-	XC6206P262DR	LVR-IC	LDO, 2.6V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P27	-	XC6206P272DR	LVR-IC	LDO, 2.7V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P28	-	XC6206P282DR	LVR-IC	LDO, 2.8V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P29	-	XC6206P292DR	LVR-IC	LDO, 2.9V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P30	-	XC6206P302DR	LVR-IC	LDO, 3.0V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P31	-	XC6206P311DR	LVR-IC	LDO, 3.1V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P32	-	XC6206P322DR	LVR-IC	LDO, 3.2V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P33	-	XC6206P332DR	LVR-IC	LDO, 3.3V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P34	-	XC6206P342DR	LVR-IC	LDO, 3.4V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P35	-	XC6206P352DR	LVR-IC	LDO, 3.5V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P36	-	XC6206P362DR	LVR-IC	LDO, 3.6V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P37	-	XC6206P372DR	LVR-IC	LDO, 3.7V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P38	-	XC6206P382DR	LVR-IC	LDO, 3.8V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P39	-	XC6206P392DR	LVR-IC	LDO, 3.9V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P40	-	XC6206P402DR	LVR-IC	LDO, 4.0V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P41	-	XC6206P412DR	LVR-IC	LDO, 4.1V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P42	-	XC6206P422DR	LVR-IC	LDO, 4.2V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P43	-	XC6206P432DR	LVR-IC	LDO, 4.3V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P44	-	XC6206P442DR	LVR-IC	LDO, 4.4V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P45	-	XC6206P452DR	LVR-IC	LDO, 4.5V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P46	-	XC6206P462DR	LVR-IC	LDO, 4.6V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P47	-	XC6206P472DR	LVR-IC	LDO, 4.7V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P48	-	XC6206P482DR	LVR-IC	LDO, 4.8V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P49	-	XC6206P492DR	LVR-IC	LDO, 4.9V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
06P50	-	XC6206P502DR	LVR-IC	LDO, 5.0V±2%, 250mA	USP-6B	49us	VR1	9b	Tor
07	-	RP110L141B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
07	-	XC6221C1517R	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
07	-	XC6223A1719R-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
07	-	XC6224A1517R	LVR-IC	LDO, 1.5V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
07	-	XC6229D15B1R-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
07	-	XC6420AB077R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/1.50V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
07	-	XC6420AB07DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/1.50V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
0710	-	Si2707-A10-GM	Lin-IC	AF PA, BTL, class-D, 2.7..6.6V, 5W(5V/3Ω), shutdown, I2C	QFN-24	38	-	9m	Slb
07A12	-	XC6207A122DR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A13	-	XC6207A132DR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A14	-	XC6207A142DR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
07A15	-	XC6207A152DR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A16	-	XC6207A162DR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A17	-	XC6207A172DR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A18	-	XC6207A182DR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A19	-	XC6207A192DR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A1C	-	XC6207A12ADR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A1D	-	XC6207A13ADR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A1E	-	XC6207A14ADR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A1F	-	XC6207A15ADR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A1H	-	XC6207A16ADR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A1K	-	XC6207A17ADR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A1L	-	XC6207A18ADR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A1M	-	XC6207A19ADR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A20	-	XC6207A202DR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A21	-	XC6207A212DR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A22	-	XC6207A222DR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A23	-	XC6207A232DR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A24	-	XC6207A242DR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A25	-	XC6207A252DR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A26	-	XC6207A262DR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A27	-	XC6207A272DR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A28	-	XC6207A282DR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A29	-	XC6207A292DR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A2A	-	XC6207A20ADR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A2B	-	XC6207A21ADR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A2C	-	XC6207A22ADR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A2D	-	XC6207A23ADR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A2E	-	XC6207A24ADR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A2F	-	XC6207A25ADR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A2H	-	XC6207A26ADR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A2K	-	XC6207A27ADR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A2L	-	XC6207A28ADR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A2M	-	XC6207A29ADR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A30	-	XC6207A302DR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A31	-	XC6207A312DR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A32	-	XC6207A322DR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A33	-	XC6207A332DR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A34	-	XC6207A342DR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A35	-	XC6207A352DR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A36	-	XC6207A362DR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A37	-	XC6207A372DR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A38	-	XC6207A382DR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A39	-	XC6207A392DR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A3A	-	XC6207A30ADR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A3B	-	XC6207A31ADR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A3C	-	XC6207A32ADR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A3D	-	XC6207A33ADR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A3E	-	XC6207A34ADR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A3F	-	XC6207A35ADR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A3H	-	XC6207A36ADR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A3K	-	XC6207A37ADR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A3L	-	XC6207A38ADR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A3M	-	XC6207A39ADR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A40	-	XC6207A40ADR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A41	-	XC6207A412DR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A42	-	XC6207A422DR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A43	-	XC6207A432DR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A44	-	XC6207A442DR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A45	-	XC6207A452DR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A46	-	XC6207A462DR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A47	-	XC6207A472DR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A48	-	XC6207A482DR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A49	-	XC6207A492DR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A4A	-	XC6207A41ADR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A4B	-	XC6207A42ADR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A4C	-	XC6207A43ADR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A4D	-	XC6207A44ADR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A4E	-	XC6207A45ADR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A4F	-	XC6207A46ADR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A4H	-	XC6207A47ADR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
07A4K	-	XC6207A48ADR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A4L	-	XC6207A49ADR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A4M	-	XC6207A402DR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07A50	-	XC6207A502DR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B12	-	XC6207B122DR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B13	-	XC6207B132DR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B14	-	XC6207B142DR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B15	-	XC6207B152DR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B16	-	XC6207B162DR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B17	-	XC6207B172DR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B18	-	XC6207B182DR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B19	-	XC6207B192DR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B1C	-	XC6207B12ADR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B1D	-	XC6207B13ADR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B1E	-	XC6207B14ADR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B1F	-	XC6207B15ADR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B1H	-	XC6207B16ADR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B1K	-	XC6207B17ADR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B1L	-	XC6207B18ADR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B1M	-	XC6207B19ADR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B20	-	XC6207B202DR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B21	-	XC6207B212DR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B22	-	XC6207B222DR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B23	-	XC6207B232DR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B24	-	XC6207B242DR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B25	-	XC6207B252DR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B26	-	XC6207B262DR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B27	-	XC6207B272DR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B28	-	XC6207B282DR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B29	-	XC6207B292DR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B2A	-	XC6207B20ADR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B2B	-	XC6207B21ADR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B2C	-	XC6207B22ADR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B2D	-	XC6207B23ADR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B2E	-	XC6207B24ADR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B2F	-	XC6207B25ADR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B2H	-	XC6207B26ADR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B2K	-	XC6207B27ADR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B2L	-	XC6207B28ADR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B2M	-	XC6207B29ADR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B30	-	XC6207B302DR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B31	-	XC6207B312DR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B32	-	XC6207B322DR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B33	-	XC6207B332DR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B34	-	XC6207B342DR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B35	-	XC6207B352DR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B36	-	XC6207B362DR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B37	-	XC6207B372DR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B38	-	XC6207B382DR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B39	-	XC6207B392DR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B3A	-	XC6207B30ADR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B3B	-	XC6207B31ADR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B3C	-	XC6207B32ADR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B3D	-	XC6207B33ADR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B3E	-	XC6207B34ADR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B3F	-	XC6207B35ADR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B3H	-	XC6207B36ADR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B3K	-	XC6207B37ADR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B3L	-	XC6207B38ADR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B3M	-	XC6207B39ADR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B40	-	XC6207B40ADR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B41	-	XC6207B412DR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B42	-	XC6207B422DR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B43	-	XC6207B432DR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B44	-	XC6207B442DR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B45	-	XC6207B452DR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B46	-	XC6207B462DR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B47	-	XC6207B472DR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B48	-	XC6207B482DR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B49	-	XC6207B492DR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
07B4A	-	XC6207B41ADR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B4B	-	XC6207B42ADR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B4C	-	XC6207B43ADR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B4D	-	XC6207B44ADR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B4E	-	XC6207B45ADR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B4F	-	XC6207B46ADR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B4H	-	XC6207B47ADR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B4K	-	XC6207B48ADR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B4L	-	XC6207B49ADR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B4M	-	XC6207B402DR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
07B50	-	XC6207B502DR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, CL, Shutdown	USP-6C	49vrc	VR4a	9b	Tor
08	-	RP110L151B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
08	-	XC6221C1617R	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
08	-	XC6223A1819R-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
08	-	XC6224A1617R	LVR-IC	LDO, 1.6V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
08	-	XC6229D1611R-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
08	-	XC6420AB087R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/1.80V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
08	-	XC6420AB08DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/1.80V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
0808A	-	EC8908-08AW1	LVR-IC	LDO, 0.8V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0808B	-	EC8908-08BW1	LVR-IC	LDO, 0.8V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0808C	-	EC8908-08CW1	LVR-IC	LDO, 0.8V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0808D	-	EC8908-08DW1	LVR-IC	LDO, 0.8V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0809A	-	EC8908-09AW1	LVR-IC	LDO, 0.9V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0809B	-	EC8908-09BW1	LVR-IC	LDO, 0.9V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0809C	-	EC8908-09CW1	LVR-IC	LDO, 0.9V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0809D	-	EC8908-09DW1	LVR-IC	LDO, 0.9V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0810A	-	EC8908-10AW1	LVR-IC	LDO, 1.0V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0810B	-	EC8908-10BW1	LVR-IC	LDO, 1.0V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0810C	-	EC8908-10CW1	LVR-IC	LDO, 1.0V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0810D	-	EC8908-10DW1	LVR-IC	LDO, 1.0V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0811A	-	EC8908-11AW1	LVR-IC	LDO, 1.1V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0811B	-	EC8908-11BW1	LVR-IC	LDO, 1.1V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0811C	-	EC8908-11CW1	LVR-IC	LDO, 1.1V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0811D	-	EC8908-11DW1	LVR-IC	LDO, 1.1V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0812A	-	EC8908-12AW1	LVR-IC	LDO, 1.2V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0812B	-	EC8908-12BW1	LVR-IC	LDO, 1.2V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0812C	-	EC8908-12CW1	LVR-IC	LDO, 1.2V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0812D	-	EC8908-12DW1	LVR-IC	LDO, 1.2V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0813A	-	EC8908-13AW1	LVR-IC	LDO, 1.3V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0813B	-	EC8908-13BW1	LVR-IC	LDO, 1.3V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0813C	-	EC8908-13CW1	LVR-IC	LDO, 1.3V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0813D	-	EC8908-13DW1	LVR-IC	LDO, 1.3V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0814A	-	EC8908-14AW1	LVR-IC	LDO, 1.4V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0814B	-	EC8908-14BW1	LVR-IC	LDO, 1.4V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0814C	-	EC8908-14CW1	LVR-IC	LDO, 1.4V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0814D	-	EC8908-14DW1	LVR-IC	LDO, 1.4V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0815A	-	EC8908-15AW1	LVR-IC	LDO, 1.5V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0815B	-	EC8908-15BW1	LVR-IC	LDO, 1.5V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0815C	-	EC8908-15CW1	LVR-IC	LDO, 1.5V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0815D	-	EC8908-15DW1	LVR-IC	LDO, 1.5V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0816A	-	EC8908-16AW1	LVR-IC	LDO, 1.6V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0816B	-	EC8908-16BW1	LVR-IC	LDO, 1.6V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0816C	-	EC8908-16CW1	LVR-IC	LDO, 1.6V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0816D	-	EC8908-16DW1	LVR-IC	LDO, 1.6V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0817A	-	EC8908-17AW1	LVR-IC	LDO, 1.7V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0817B	-	EC8908-17BW1	LVR-IC	LDO, 1.7V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0817C	-	EC8908-17CW1	LVR-IC	LDO, 1.7V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0817D	-	EC8908-17DW1	LVR-IC	LDO, 1.7V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0818A	-	EC8908-18AW1	LVR-IC	LDO, 1.8V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0818B	-	EC8908-18BW1	LVR-IC	LDO, 1.8V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0818C	-	EC8908-18CW1	LVR-IC	LDO, 1.8V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0818D	-	EC8908-18DW1	LVR-IC	LDO, 1.8V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0819A	-	EC8908-19AW1	LVR-IC	LDO, 1.9V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0819B	-	EC8908-19BW1	LVR-IC	LDO, 1.9V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0819C	-	EC8908-19CW1	LVR-IC	LDO, 1.9V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0819D	-	EC8908-19DW1	LVR-IC	LDO, 1.9V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0820A	-	EC8908-20AW1	LVR-IC	LDO, 2.0V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0820B	-	EC8908-20BW1	LVR-IC	LDO, 2.0V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0820C	-	EC8908-20CW1	LVR-IC	LDO, 2.0V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0820D	-	EC8908-20DW1	LVR-IC	LDO, 2.0V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0821A	-	EC8908-21AW1	LVR-IC	LDO, 2.1V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0821B	-	EC8908-21BW1	LVR-IC	LDO, 2.1V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0821C	-	EC8908-21CW1	LVR-IC	LDO, 2.1V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0821D	-	EC8908-21DW1	LVR-IC	LDO, 2.1V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0822A	-	EC8908-22AW1	LVR-IC	LDO, 2.2V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0822B	-	EC8908-22BW1	LVR-IC	LDO, 2.2V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0822C	-	EC8908-22CW1	LVR-IC	LDO, 2.2V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0822D	-	EC8908-22DW1	LVR-IC	LDO, 2.2V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0823A	-	EC8908-23AW1	LVR-IC	LDO, 2.3V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0823B	-	EC8908-23BW1	LVR-IC	LDO, 2.3V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0823C	-	EC8908-23CW1	LVR-IC	LDO, 2.3V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0823D	-	EC8908-23DW1	LVR-IC	LDO, 2.3V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0824A	-	EC8908-24AW1	LVR-IC	LDO, 2.4V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0824B	-	EC8908-24BW1	LVR-IC	LDO, 2.4V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0824C	-	EC8908-24CW1	LVR-IC	LDO, 2.4V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0824D	-	EC8908-24DW1	LVR-IC	LDO, 2.4V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0825A	-	EC8908-25AW1	LVR-IC	LDO, 2.5V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0825B	-	EC8908-25BW1	LVR-IC	LDO, 2.5V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0825C	-	EC8908-25CW1	LVR-IC	LDO, 2.5V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0825D	-	EC8908-25DW1	LVR-IC	LDO, 2.5V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0826A	-	EC8908-26AW1	LVR-IC	LDO, 2.6V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0826B	-	EC8908-26BW1	LVR-IC	LDO, 2.6V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0826C	-	EC8908-26CW1	LVR-IC	LDO, 2.6V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0826D	-	EC8908-26DW1	LVR-IC	LDO, 2.6V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0827A	-	EC8908-27AW1	LVR-IC	LDO, 2.7V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0827B	-	EC8908-27BW1	LVR-IC	LDO, 2.7V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0827C	-	EC8908-27CW1	LVR-IC	LDO, 2.7V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0827D	-	EC8908-27DW1	LVR-IC	LDO, 2.7V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0828A	-	EC8908-28AW1	LVR-IC	LDO, 2.8V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0828B	-	EC8908-28BW1	LVR-IC	LDO, 2.8V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0828C	-	EC8908-28CW1	LVR-IC	LDO, 2.8V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0828D	-	EC8908-28DW1	LVR-IC	LDO, 2.8V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0829A	-	EC8908-29AW1	LVR-IC	LDO, 2.9V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0829B	-	EC8908-29BW1	LVR-IC	LDO, 2.9V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0829C	-	EC8908-29CW1	LVR-IC	LDO, 2.9V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0829D	-	EC8908-29DW1	LVR-IC	LDO, 2.9V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0830A	-	EC8908-30AW1	LVR-IC	LDO, 3.0V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0830B	-	EC8908-30BW1	LVR-IC	LDO, 3.0V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0830C	-	EC8908-30CW1	LVR-IC	LDO, 3.0V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0830D	-	EC8908-30DW1	LVR-IC	LDO, 3.0V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0831A	-	EC8908-31AW1	LVR-IC	LDO, 3.1V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0831B	-	EC8908-31BW1	LVR-IC	LDO, 3.1V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0831C	-	EC8908-31CW1	LVR-IC	LDO, 3.1V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0831D	-	EC8908-31DW1	LVR-IC	LDO, 3.1V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0832A	-	EC8908-32AW1	LVR-IC	LDO, 3.2V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0832B	-	EC8908-32BW1	LVR-IC	LDO, 3.2V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0832C	-	EC8908-32CW1	LVR-IC	LDO, 3.2V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0832D	-	EC8908-32DW1	LVR-IC	LDO, 3.2V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0833A	-	EC8908-33AW1	LVR-IC	LDO, 3.3V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0833B	-	EC8908-33BW1	LVR-IC	LDO, 3.3V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0833C	-	EC8908-33CW1	LVR-IC	LDO, 3.3V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0833D	-	EC8908-33DW1	LVR-IC	LDO, 3.3V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0834A	-	EC8908-34AW1	LVR-IC	LDO, 3.4V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0834B	-	EC8908-34BW1	LVR-IC	LDO, 3.4V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0834C	-	EC8908-34CW1	LVR-IC	LDO, 3.4V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0834D	-	EC8908-34DW1	LVR-IC	LDO, 3.4V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0835A	-	EC8908-35AW1	LVR-IC	LDO, 3.5V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0835B	-	EC8908-35BW1	LVR-IC	LDO, 3.5V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0835C	-	EC8908-35CW1	LVR-IC	LDO, 3.5V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0835D	-	EC8908-35DW1	LVR-IC	LDO, 3.5V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0836A	-	EC8908-36AW1	LVR-IC	LDO, 3.6V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0836B	-	EC8908-36BW1	LVR-IC	LDO, 3.6V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0836C	-	EC8908-36CW1	LVR-IC	LDO, 3.6V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0836D	-	EC8908-36DW1	LVR-IC	LDO, 3.6V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0837A	-	EC8908-37AW1	LVR-IC	LDO, 3.7V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0837B	-	EC8908-37BW1	LVR-IC	LDO, 3.7V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0837C	-	EC8908-37CW1	LVR-IC	LDO, 3.7V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0837D	-	EC8908-37DW1	LVR-IC	LDO, 3.7V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0838A	-	EC8908-38AW1	LVR-IC	LDO, 3.8V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0838B	-	EC8908-38BW1	LVR-IC	LDO, 3.8V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0838C	-	EC8908-38CW1	LVR-IC	LDO, 3.8V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0838D	-	EC8908-38DW1	LVR-IC	LDO, 3.8V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0839A	-	EC8908-39AW1	LVR-IC	LDO, 3.9V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0839B	-	EC8908-39BW1	LVR-IC	LDO, 3.9V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0839C	-	EC8908-39CW1	LVR-IC	LDO, 3.9V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0839D	-	EC8908-39DW1	LVR-IC	LDO, 3.9V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0840A	-	EC8908-40AW1	LVR-IC	LDO, 4.0V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0840B	-	EC8908-40BW1	LVR-IC	LDO, 4.0V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0840C	-	EC8908-40CW1	LVR-IC	LDO, 4.0V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0840D	-	EC8908-40DW1	LVR-IC	LDO, 4.0V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0841A	-	EC8908-41AW1	LVR-IC	LDO, 4.1V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0841B	-	EC8908-41BW1	LVR-IC	LDO, 4.1V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0841C	-	EC8908-41CW1	LVR-IC	LDO, 4.1V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0841D	-	EC8908-41DW1	LVR-IC	LDO, 4.1V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0842A	-	EC8908-42AW1	LVR-IC	LDO, 4.2V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0842B	-	EC8908-42BW1	LVR-IC	LDO, 4.2V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0842C	-	EC8908-42CW1	LVR-IC	LDO, 4.2V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0842D	-	EC8908-42DW1	LVR-IC	LDO, 4.2V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0843A	-	EC8908-43AW1	LVR-IC	LDO, 4.3V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0843B	-	EC8908-43BW1	LVR-IC	LDO, 4.3V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0843C	-	EC8908-43CW1	LVR-IC	LDO, 4.3V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0843D	-	EC8908-43DW1	LVR-IC	LDO, 4.3V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0844A	-	EC8908-44AW1	LVR-IC	LDO, 4.4V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0844B	-	EC8908-44BW1	LVR-IC	LDO, 4.4V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0844C	-	EC8908-44CW1	LVR-IC	LDO, 4.4V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0844D	-	EC8908-44DW1	LVR-IC	LDO, 4.4V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0845A	-	EC8908-45AW1	LVR-IC	LDO, 4.5V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0845B	-	EC8908-45BW1	LVR-IC	LDO, 4.5V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0845C	-	EC8908-45CW1	LVR-IC	LDO, 4.5V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0845D	-	EC8908-45DW1	LVR-IC	LDO, 4.5V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0846A	-	EC8908-46AW1	LVR-IC	LDO, 4.6V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0846B	-	EC8908-46BW1	LVR-IC	LDO, 4.6V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0846C	-	EC8908-46CW1	LVR-IC	LDO, 4.6V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0846D	-	EC8908-46DW1	LVR-IC	LDO, 4.6V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0847A	-	EC8908-47AW1	LVR-IC	LDO, 4.7V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0847B	-	EC8908-47BW1	LVR-IC	LDO, 4.7V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0847C	-	EC8908-47CW1	LVR-IC	LDO, 4.7V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0847D	-	EC8908-47DW1	LVR-IC	LDO, 4.7V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
0848A	-	EC8908-48AW1	LVR-IC	LDO, 4.8V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0848B	-	EC8908-48BW1	LVR-IC	LDO, 4.8V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
0848C	-	EC8908-48CW1	LVR-IC	LDO, 4.8V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
084HA	-	EC8908-4HAW1	LVR-IC	LDO, 4.75V±1.5%, 300mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
084HB	-	EC8908-4HBW1	LVR-IC	LDO, 4.75V±1.5%, 500mA, +CE	WDFN-6	56zg	VR4	9i	Ecm
084HC	-	EC8908-4HCW1	LVR-IC	LDO, 4.75V±1.5%, 300mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
084HD	-	EC8908-4HDW1	LVR-IC	LDO, 4.75V±1.5%, 500mA, -CE	WDFN-6	56zg	VR4	9i	Ecm
09	-	RP110L161B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
09	-	XC6221C1717R	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
09	-	XC6223A1919R-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
09	-	XC6224A1717R	LVR-IC	LDO, 1.7V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
09	-	XC6229D16B1R-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
09	-	XC6420AB097R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.50V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
09	-	XC6420AB09DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.50V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
095	-	AP6209-12GU	LVR-IC	LDO, 1.2V±2%, 250mA, Halogen-free	UFN-6	56us	VR1	9ia	Anw
095	-	AP6209-12PU	LVR-IC	LDO, 1.2V±2%, 250mA	UFN-6	56us	VR1	9i	Anw
098	-	AP6209-15GU	LVR-IC	LDO, 1.5V±2%, 250mA, Halogen-free	UFN-6	56us	VR1	9ia	Anw
098	-	AP6209-15PU	LVR-IC	LDO, 1.5V±2%, 250mA	UFN-6	56us	VR1	9i	Anw
09A	-	AP6209-18GU	LVR-IC	LDO, 1.8V±2%, 250mA, Halogen-free	UFN-6	56us	VR1	9ia	Anw
09A	-	AP6209-18PU	LVR-IC	LDO, 1.8V±2%, 250mA	UFN-6	56us	VR1	9i	Anw
09A09	-	LN6219A092DR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A09	-	XC6209A092DR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A0M	-	LN6219A09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A0M	-	XC6209A09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A10	-	LN6219A102DR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A10	-	XC6209A102DR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A11	-	LN6219A112DR	LVR-IC	LDO, 1.1.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A11	-	XC6209A112DR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A12	-	LN6219A122DR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A12	-	XC6209A122DR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A13	-	LN6219A132DR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A13	-	XC6209A132DR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
09A14	-	LN6219A142DR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A14	-	XC6209A142DR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A15	-	LN6219A152DR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A15	-	XC6209A152DR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A16	-	LN6219A162DR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A16	-	XC6209A162DR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A17	-	LN6219A172DR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A17	-	XC6209A172DR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A18	-	LN6219A182DR	LVR-IC	LDO, 1.8V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A18	-	XC6209A182DR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A19	-	LN6219A192DR	LVR-IC	LDO, 1.9V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A19	-	XC6209A192DR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A1A	-	LN6219A10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A1A	-	XC6209A10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A1B	-	LN6219A11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A1B	-	XC6209A11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A1C	-	LN6219A12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A1C	-	XC6209A12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A1D	-	LN6219A13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A1D	-	XC6209A13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A1E	-	LN6219A14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A1E	-	XC6209A14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A1F	-	LN6219A15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A1F	-	XC6209A15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A1H	-	LN6219A16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A1H	-	XC6209A16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A1K	-	LN6219A17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A1K	-	XC6209A17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A1L	-	LN6219A18ADR	LVR-IC	LDO, 1.85V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A1L	-	XC6209A18ADR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A1M	-	LN6219A19ADR	LVR-IC	LDO, 1.95V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A1M	-	XC6209A19ADR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A20	-	LN6219A202DR	LVR-IC	LDO, 2.0V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A20	-	XC6209A202DR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A20A	-	LN6219A20ADR	LVR-IC	LDO, 2.05V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A21	-	LN6219A212DR	LVR-IC	LDO, 2.1V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A21	-	XC6209A212DR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A22	-	LN6219A222DR	LVR-IC	LDO, 2.2V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A22	-	XC6209A222DR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A23	-	LN6219A232DR	LVR-IC	LDO, 2.3V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A23	-	XC6209A232DR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A24	-	LN6219A242DR	LVR-IC	LDO, 2.4V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A24	-	XC6209A242DR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A25	-	LN6219A252DR	LVR-IC	LDO, 2.5V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A25	-	XC6209A252DR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A26	-	LN6219A262DR	LVR-IC	LDO, 2.6V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A26	-	XC6209A262DR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A27	-	LN6219A272DR	LVR-IC	LDO, 2.7V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A27	-	XC6209A272DR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A28	-	LN6219A282DR	LVR-IC	LDO, 2.8V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A28	-	XC6209A282DR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A29	-	LN6219A292DR	LVR-IC	LDO, 2.9V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A29	-	XC6209A292DR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A2A	-	XC6209A20ADR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A2B	-	LN6219A21ADR	LVR-IC	LDO, 2.15V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A2B	-	XC6209A21ADR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A2C	-	LN6219A22ADR	LVR-IC	LDO, 2.25V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A2C	-	XC6209A22ADR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A2D	-	LN6219A23ADR	LVR-IC	LDO, 2.35V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A2D	-	XC6209A23ADR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A2E	-	LN6219A24ADR	LVR-IC	LDO, 2.45V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A2E	-	XC6209A24ADR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A2F	-	LN6219A25ADR	LVR-IC	LDO, 2.55V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A2F	-	XC6209A25ADR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A2H	-	LN6219A26ADR	LVR-IC	LDO, 2.65V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A2H	-	XC6209A26ADR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A2K	-	LN6219A27ADR	LVR-IC	LDO, 2.75V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A2K	-	XC6209A27ADR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A2L	-	LN6219A28ADR	LVR-IC	LDO, 2.85V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A2L	-	XC6209A28ADR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
09A2M	-	LN6219A29ADR	LVR-IC	LDO, 2.95V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A2M	-	XC6209A29ADR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A30	-	LN6219A302DR	LVR-IC	LDO, 3.0V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A30	-	XC6209A302DR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A31	-	LN6219A312DR	LVR-IC	LDO, 3.1V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A31	-	XC6209A312DR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A32	-	LN6219A322DR	LVR-IC	LDO, 3.2V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A32	-	XC6209A322DR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A33	-	LN6219A332DR	LVR-IC	LDO, 3.3V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A33	-	XC6209A332DR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A34	-	LN6219A342DR	LVR-IC	LDO, 3.4V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A34	-	XC6209A342DR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A35	-	LN6219A352DR	LVR-IC	LDO, 3.5V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A35	-	XC6209A352DR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A36	-	LN6219A362DR	LVR-IC	LDO, 3.6V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A36	-	XC6209A362DR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A37	-	LN6219A372DR	LVR-IC	LDO, 3.7V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A37	-	XC6209A372DR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A38	-	LN6219A382DR	LVR-IC	LDO, 3.8V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A38	-	XC6209A382DR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A39	-	LN6219A392DR	LVR-IC	LDO, 3.9V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A39	-	XC6209A392DR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A3A	-	LN6219A30ADR	LVR-IC	LDO, 3.05V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A3A	-	XC6209A30ADR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A3B	-	LN6219A31ADR	LVR-IC	LDO, 3.15V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A3B	-	XC6209A31ADR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A3C	-	LN6219A32ADR	LVR-IC	LDO, 3.25V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A3C	-	XC6209A32ADR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A3D	-	LN6219A33ADR	LVR-IC	LDO, 3.35V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A3D	-	XC6209A33ADR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A3E	-	LN6219A34ADR	LVR-IC	LDO, 3.45V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A3E	-	XC6209A34ADR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A3F	-	LN6219A35ADR	LVR-IC	LDO, 3.55V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A3F	-	XC6209A35ADR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A3H	-	LN6219A36ADR	LVR-IC	LDO, 3.65V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A3H	-	XC6209A36ADR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A3K	-	LN6219A37ADR	LVR-IC	LDO, 3.75V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A3K	-	XC6209A37ADR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A3L	-	LN6219A38ADR	LVR-IC	LDO, 3.85V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A3L	-	XC6209A38ADR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A3M	-	LN6219A39ADR	LVR-IC	LDO, 3.95V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A3M	-	XC6209A39ADR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A40	-	LN6219A402DR	LVR-IC	LDO, 4.0V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A40	-	XC6209A402DR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A41	-	LN6219A412DR	LVR-IC	LDO, 4.1V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A41	-	XC6209A412DR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A42	-	LN6219A422DR	LVR-IC	LDO, 4.2V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A42	-	XC6209A422DR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A43	-	LN6219A432DR	LVR-IC	LDO, 4.3V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A43	-	XC6209A432DR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A44	-	LN6219A442DR	LVR-IC	LDO, 4.4V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A44	-	XC6209A442DR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A45	-	LN6219A452DR	LVR-IC	LDO, 4.5V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A45	-	XC6209A452DR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A46	-	LN6219A462DR	LVR-IC	LDO, 4.6V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A46	-	XC6209A462DR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A47	-	LN6219A472DR	LVR-IC	LDO, 4.7V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A47	-	XC6209A472DR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A48	-	LN6219A482DR	LVR-IC	LDO, 4.8V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A48	-	XC6209A482DR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A49	-	LN6219A492DR	LVR-IC	LDO, 4.9V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A49	-	XC6209A492DR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A4A	-	LN6219A40ADR	LVR-IC	LDO, 4.05V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A4A	-	XC6209A40ADR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A4B	-	LN6219A41ADR	LVR-IC	LDO, 4.15V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A4B	-	XC6209A41ADR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A4C	-	LN6219A42ADR	LVR-IC	LDO, 4.25V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A4C	-	XC6209A42ADR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A4D	-	LN6219A43ADR	LVR-IC	LDO, 4.35V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A4D	-	XC6209A43ADR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
09A4E	-	LN6219A44ADR	LVR-IC	LDO, 4.45V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A4E	-	XC6209A44ADR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A4F	-	LN6219A45ADR	LVR-IC	LDO, 4.55V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A4F	-	XC6209A45ADR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A4H	-	LN6219A46ADR	LVR-IC	LDO, 4.65V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A4H	-	XC6209A46ADR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A4K	-	LN6219A47ADR	LVR-IC	LDO, 4.75V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A4K	-	XC6209A47ADR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A4L	-	LN6219A48ADR	LVR-IC	LDO, 4.85V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A4L	-	XC6209A48ADR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A4M	-	LN6219A49ADR	LVR-IC	LDO, 4.95V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A4M	-	XC6209A49ADR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A50	-	LN6219A502DR	LVR-IC	LDO, 5.0V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Inw
09A50	-	XC6209A502DR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A51	-	XC6209A512DR	LVR-IC	LDO, 5.1V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A52	-	XC6209A522DR	LVR-IC	LDO, 5.2V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A53	-	XC6209A532DR	LVR-IC	LDO, 5.3V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A54	-	XC6209A542DR	LVR-IC	LDO, 5.4V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A55	-	XC6209A552DR	LVR-IC	LDO, 5.5V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A56	-	XC6209A562DR	LVR-IC	LDO, 5.6V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A57	-	XC6209A572DR	LVR-IC	LDO, 5.7V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A58	-	XC6209A582DR	LVR-IC	LDO, 5.8V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A59	-	XC6209A592DR	LVR-IC	LDO, 5.9V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A5A	-	XC6209A50ADR	LVR-IC	LDO, 5.05V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A5B	-	XC6209A51ADR	LVR-IC	LDO, 5.15V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A5C	-	XC6209A52ADR	LVR-IC	LDO, 5.25V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A5D	-	XC6209A53ADR	LVR-IC	LDO, 5.35V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A5E	-	XC6209A54ADR	LVR-IC	LDO, 5.45V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A5F	-	XC6209A55ADR	LVR-IC	LDO, 5.55V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A5H	-	XC6209A56ADR	LVR-IC	LDO, 5.65V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A5K	-	XC6209A57ADR	LVR-IC	LDO, 5.75V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A5L	-	XC6209A58ADR	LVR-IC	LDO, 5.85V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A5M	-	XC6209A59ADR	LVR-IC	LDO, 5.95V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09A60	-	XC6209A602DR	LVR-IC	LDO, 6.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
09B	-	AP6209-BBGU	LVR-IC	LDO, 1.85V±2%, 250mA, Halogen-free	UFN-6	56us	VR1	9ia	Anw
09B	-	AP6209-BBPU	LVR-IC	LDO, 1.85V±2%, 250mA	UFN-6	56us	VR1	9i	Anw
09B09	-	LN6219B092DR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B09	-	XC6209B092DR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B0M	-	LN6219B09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B0M	-	XC6209B09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B10	-	LN6219B102DR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B10	-	XC6209B102DR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B11	-	LN6219B112DR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B11	-	XC6209B112DR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B12	-	LN6219B122DR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B12	-	XC6209B122DR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B13	-	LN6219B132DR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B13	-	XC6209B132DR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B14	-	LN6219B142DR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B14	-	XC6209B142DR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B15	-	LN6219B152DR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B15	-	XC6209B152DR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B16	-	LN6219B162DR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B16	-	XC6209B162DR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B17	-	LN6219B172DR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B17	-	XC6209B172DR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B18	-	LN6219B182DR	LVR-IC	LDO, 1.8V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B18	-	XC6209B182DR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B19	-	LN6219B192DR	LVR-IC	LDO, 1.9V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B19	-	XC6209B192DR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B1A	-	LN6219B10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B1A	-	XC6209B10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B1B	-	LN6219B11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B1B	-	XC6209B11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B1C	-	LN6219B12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B1C	-	XC6209B12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B1D	-	LN6219B13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B1D	-	XC6209B13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B1E	-	LN6219B14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B1E	-	XC6209B14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
09B1F	-	LN6219B15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B1F	-	XC6209B15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B1H	-	LN6219B16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B1H	-	XC6209B16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B1K	-	LN6219B17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B1K	-	XC6209B17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B1L	-	LN6219B18ADR	LVR-IC	LDO, 1.85V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B1L	-	XC6209B18ADR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B1M	-	LN6219B19ADR	LVR-IC	LDO, 1.95V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B1M	-	XC6209B19ADR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B20	-	LN6219B202DR	LVR-IC	LDO, 2.0V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B20	-	XC6209B202DR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B21	-	LN6219B212DR	LVR-IC	LDO, 2.1V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B21	-	XC6209B212DR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B22	-	LN6219B222DR	LVR-IC	LDO, 2.2V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B22	-	XC6209B222DR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B23	-	LN6219B232DR	LVR-IC	LDO, 2.3V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B23	-	XC6209B232DR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B24	-	LN6219B242DR	LVR-IC	LDO, 2.4V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B24	-	XC6209B242DR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B25	-	LN6219B252DR	LVR-IC	LDO, 2.5V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B25	-	XC6209B252DR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B26	-	LN6219B262DR	LVR-IC	LDO, 2.6V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B26	-	XC6209B262DR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B27	-	LN6219B272DR	LVR-IC	LDO, 2.7V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B27	-	XC6209B272DR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B28	-	LN6219B282DR	LVR-IC	LDO, 2.8V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B28	-	XC6209B282DR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B29	-	LN6219B292DR	LVR-IC	LDO, 2.9V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B29	-	XC6209B292DR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B2A	-	LN6219B20ADR	LVR-IC	LDO, 2.05V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B2A	-	XC6209B20ADR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B2B	-	LN6219B21ADR	LVR-IC	LDO, 2.15V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B2B	-	XC6209B21ADR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B2C	-	LN6219B22ADR	LVR-IC	LDO, 2.25V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B2C	-	XC6209B22ADR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B2D	-	LN6219B23ADR	LVR-IC	LDO, 2.35V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B2D	-	XC6209B23ADR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B2E	-	LN6219B24ADR	LVR-IC	LDO, 2.45V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B2E	-	XC6209B24ADR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B2F	-	LN6219B25ADR	LVR-IC	LDO, 2.55V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B2F	-	XC6209B25ADR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B2H	-	LN6219B26ADR	LVR-IC	LDO, 2.65V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B2H	-	XC6209B26ADR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B2K	-	LN6219B27ADR	LVR-IC	LDO, 2.75V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B2K	-	XC6209B27ADR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B2L	-	LN6219B28ADR	LVR-IC	LDO, 2.85V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B2L	-	XC6209B28ADR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B2M	-	LN6219B29ADR	LVR-IC	LDO, 2.95V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B2M	-	XC6209B29ADR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B30	-	LN6219B302DR	LVR-IC	LDO, 3.0V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B30	-	XC6209B302DR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B31	-	LN6219B312DR	LVR-IC	LDO, 3.1V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B31	-	XC6209B312DR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B32	-	LN6219B322DR	LVR-IC	LDO, 3.2V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B32	-	XC6209B322DR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B33	-	LN6219B332DR	LVR-IC	LDO, 3.3V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B33	-	XC6209B332DR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B34	-	LN6219B342DR	LVR-IC	LDO, 3.4V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B34	-	XC6209B342DR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B35	-	LN6219B352DR	LVR-IC	LDO, 3.5V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B35	-	XC6209B352DR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B36	-	LN6219B362DR	LVR-IC	LDO, 3.6V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B36	-	XC6209B362DR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B37	-	LN6219B372DR	LVR-IC	LDO, 3.7V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B37	-	XC6209B372DR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B38	-	LN6219B382DR	LVR-IC	LDO, 3.8V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B38	-	XC6209B382DR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B39	-	LN6219B392DR	LVR-IC	LDO, 3.9V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B39	-	XC6209B392DR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
09B3A	-	LN6219B30ADR	LVR-IC	LDO, 3.05V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B3A	-	XC6209B30ADR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B3B	-	LN6219B31ADR	LVR-IC	LDO, 3.15V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B3B	-	XC6209B31ADR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B3C	-	LN6219B32ADR	LVR-IC	LDO, 3.25V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B3C	-	XC6209B32ADR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B3D	-	LN6219B33ADR	LVR-IC	LDO, 3.35V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B3D	-	XC6209B33ADR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B3E	-	LN6219B34ADR	LVR-IC	LDO, 3.45V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B3E	-	XC6209B34ADR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B3F	-	LN6219B35ADR	LVR-IC	LDO, 3.55V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B3F	-	XC6209B35ADR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B3H	-	LN6219B36ADR	LVR-IC	LDO, 3.65V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B3H	-	XC6209B36ADR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B3K	-	LN6219B37ADR	LVR-IC	LDO, 3.75V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B3K	-	XC6209B37ADR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B3L	-	LN6219B38ADR	LVR-IC	LDO, 3.85V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B3L	-	XC6209B38ADR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B3M	-	LN6219B39ADR	LVR-IC	LDO, 3.95V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B3M	-	XC6209B39ADR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B40	-	LN6219B402DR	LVR-IC	LDO, 4.0V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B40	-	XC6209B402DR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B41	-	LN6219B412DR	LVR-IC	LDO, 4.1V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B41	-	XC6209B412DR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B42	-	LN6219B422DR	LVR-IC	LDO, 4.2V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B42	-	XC6209B422DR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B43	-	LN6219B432DR	LVR-IC	LDO, 4.3V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B43	-	XC6209B432DR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B44	-	LN6219B442DR	LVR-IC	LDO, 4.4V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B44	-	XC6209B442DR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B45	-	LN6219B452DR	LVR-IC	LDO, 4.5V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B45	-	XC6209B452DR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B46	-	LN6219B462DR	LVR-IC	LDO, 4.6V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B46	-	XC6209B462DR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B47	-	LN6219B472DR	LVR-IC	LDO, 4.7V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B47	-	XC6209B472DR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B48	-	LN6219B482DR	LVR-IC	LDO, 4.8V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B48	-	XC6209B482DR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B49	-	LN6219B492DR	LVR-IC	LDO, 4.9V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B49	-	XC6209B492DR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B4A	-	LN6219B40ADR	LVR-IC	LDO, 4.05V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B4A	-	XC6209B40ADR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B4B	-	LN6219B41ADR	LVR-IC	LDO, 4.15V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B4B	-	XC6209B41ADR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B4C	-	LN6219B42ADR	LVR-IC	LDO, 4.25V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B4C	-	XC6209B42ADR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B4D	-	LN6219B43ADR	LVR-IC	LDO, 4.35V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B4D	-	XC6209B43ADR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B4E	-	LN6219B44ADR	LVR-IC	LDO, 4.45V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B4E	-	XC6209B44ADR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B4F	-	LN6219B45ADR	LVR-IC	LDO, 4.55V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B4F	-	XC6209B45ADR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B4H	-	LN6219B46ADR	LVR-IC	LDO, 4.65V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B4H	-	XC6209B46ADR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B4K	-	LN6219B47ADR	LVR-IC	LDO, 4.75V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B4K	-	XC6209B47ADR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B4L	-	LN6219B48ADR	LVR-IC	LDO, 4.85V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B4L	-	XC6209B48ADR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B4M	-	LN6219B49ADR	LVR-IC	LDO, 4.95V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B4M	-	XC6209B49ADR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B50	-	LN6219B502DR	LVR-IC	LDO, 5.0V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Inw
09B50	-	XC6209B502DR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B51	-	XC6209B512DR	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B52	-	XC6209B522DR	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B53	-	XC6209B532DR	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B54	-	XC6209B542DR	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B55	-	XC6209B552DR	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B56	-	XC6209B562DR	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B57	-	XC6209B572DR	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B58	-	XC6209B582DR	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
09B59	-	XC6209B592DR	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B5A	-	XC6209B50ADR	LVR-IC	LDO, 5.05V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B5B	-	XC6209B51ADR	LVR-IC	LDO, 5.15V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B5C	-	XC6209B52ADR	LVR-IC	LDO, 5.25V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B5D	-	XC6209B53ADR	LVR-IC	LDO, 5.35V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B5E	-	XC6209B54ADR	LVR-IC	LDO, 5.45V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B5F	-	XC6209B55ADR	LVR-IC	LDO, 5.55V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B5H	-	XC6209B56ADR	LVR-IC	LDO, 5.65V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B5K	-	XC6209B57ADR	LVR-IC	LDO, 5.75V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B5L	-	XC6209B58ADR	LVR-IC	LDO, 5.85V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B5M	-	XC6209B59ADR	LVR-IC	LDO, 5.95V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09B60	-	XC6209B602DR	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
09C09	-	LN6219C092DR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C09	-	XC6209C092DR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C0M	-	LN6219C09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C0M	-	XC6209C09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C10	-	LN6219C102DR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C10	-	XC6209C102DR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C11	-	LN6219C112DR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C11	-	XC6209C112DR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C12	-	LN6219C122DR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C12	-	XC6209C122DR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C13	-	LN6219C132DR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C13	-	XC6209C132DR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C14	-	LN6219C142DR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C14	-	XC6209C142DR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C15	-	LN6219C152DR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C15	-	XC6209C152DR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C16	-	LN6219C162DR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C16	-	XC6209C162DR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C17	-	LN6219C172DR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C17	-	XC6209C172DR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C18	-	LN6219C182DR	LVR-IC	LDO, 1.8V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C18	-	XC6209C182DR	LVR-IC	LDO, 1.8V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C19	-	LN6219C192DR	LVR-IC	LDO, 1.9V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C19	-	XC6209C192DR	LVR-IC	LDO, 1.9V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C1A	-	LN6219C10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C1A	-	XC6209C10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C1B	-	LN6219C11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C1B	-	XC6209C11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C1C	-	LN6219C12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C1C	-	XC6209C12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C1D	-	LN6219C13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C1D	-	XC6209C13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C1E	-	LN6219C14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C1E	-	XC6209C14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C1F	-	LN6219C15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C1F	-	XC6209C15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C1H	-	LN6219C16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C1H	-	XC6209C16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C1K	-	LN6219C17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C1K	-	XC6209C17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C1L	-	LN6219C18ADR	LVR-IC	LDO, 1.85V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C1L	-	XC6209C18ADR	LVR-IC	LDO, 1.85V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C1M	-	LN6219C19ADR	LVR-IC	LDO, 1.95V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C1M	-	XC6209C19ADR	LVR-IC	LDO, 1.95V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C20	-	LN6219C202DR	LVR-IC	LDO, 2.0V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C20	-	XC6209C202DR	LVR-IC	LDO, 2.0V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C21	-	LN6219C212DR	LVR-IC	LDO, 2.1V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C21	-	XC6209C212DR	LVR-IC	LDO, 2.1V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C22	-	LN6219C222DR	LVR-IC	LDO, 2.2V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C22	-	XC6209C222DR	LVR-IC	LDO, 2.2V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C23	-	LN6219C232DR	LVR-IC	LDO, 2.3V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C23	-	XC6209C232DR	LVR-IC	LDO, 2.3V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C24	-	LN6219C242DR	LVR-IC	LDO, 2.4V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C24	-	XC6209C242DR	LVR-IC	LDO, 2.4V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C25	-	LN6219C252DR	LVR-IC	LDO, 2.5V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C25	-	XC6209C252DR	LVR-IC	LDO, 2.5V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C26	-	LN6219C262DR	LVR-IC	LDO, 2.6V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C26	-	XC6209C262DR	LVR-IC	LDO, 2.6V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
09C27	-	LN6219C272DR	LVR-IC	LDO, 2.7V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C27	-	XC6209C272DR	LVR-IC	LDO, 2.7V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C28	-	LN6219C282DR	LVR-IC	LDO, 2.8V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C28	-	XC6209C282DR	LVR-IC	LDO, 2.8V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C29	-	LN6219C292DR	LVR-IC	LDO, 2.9V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C29	-	XC6209C292DR	LVR-IC	LDO, 2.9V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C2A	-	LN6219C20ADR	LVR-IC	LDO, 2.05V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C2A	-	XC6209C20ADR	LVR-IC	LDO, 2.05V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C2B	-	LN6219C21ADR	LVR-IC	LDO, 2.15V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C2B	-	XC6209C21ADR	LVR-IC	LDO, 2.15V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C2C	-	LN6219C22ADR	LVR-IC	LDO, 2.25V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C2C	-	XC6209C22ADR	LVR-IC	LDO, 2.25V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C2D	-	LN6219C23ADR	LVR-IC	LDO, 2.35V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C2D	-	XC6209C23ADR	LVR-IC	LDO, 2.35V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C2E	-	LN6219C24ADR	LVR-IC	LDO, 2.45V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C2E	-	XC6209C24ADR	LVR-IC	LDO, 2.45V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C2F	-	LN6219C25ADR	LVR-IC	LDO, 2.55V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C2F	-	XC6209C25ADR	LVR-IC	LDO, 2.55V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C2H	-	LN6219C26ADR	LVR-IC	LDO, 2.65V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C2H	-	XC6209C26ADR	LVR-IC	LDO, 2.65V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C2K	-	LN6219C27ADR	LVR-IC	LDO, 2.75V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C2K	-	XC6209C27ADR	LVR-IC	LDO, 2.75V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C2L	-	LN6219C28ADR	LVR-IC	LDO, 2.85V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C2L	-	XC6209C28ADR	LVR-IC	LDO, 2.85V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C2M	-	LN6219C29ADR	LVR-IC	LDO, 2.95V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C2M	-	XC6209C29ADR	LVR-IC	LDO, 2.95V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C30	-	LN6219C302DR	LVR-IC	LDO, 3.0V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C30	-	XC6209C302DR	LVR-IC	LDO, 3.0V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C31	-	LN6219C312DR	LVR-IC	LDO, 3.1V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C31	-	XC6209C312DR	LVR-IC	LDO, 3.1V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C32	-	LN6219C322DR	LVR-IC	LDO, 3.2V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C32	-	XC6209C322DR	LVR-IC	LDO, 3.2V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C33	-	LN6219C332DR	LVR-IC	LDO, 3.3V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C33	-	XC6209C332DR	LVR-IC	LDO, 3.3V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C34	-	LN6219C342DR	LVR-IC	LDO, 3.4V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C34	-	XC6209C342DR	LVR-IC	LDO, 3.4V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C35	-	LN6219C352DR	LVR-IC	LDO, 3.5V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C35	-	XC6209C352DR	LVR-IC	LDO, 3.5V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C36	-	LN6219C362DR	LVR-IC	LDO, 3.6V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C36	-	XC6209C362DR	LVR-IC	LDO, 3.6V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C37	-	LN6219C372DR	LVR-IC	LDO, 3.7V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C37	-	XC6209C372DR	LVR-IC	LDO, 3.7V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C38	-	LN6219C382DR	LVR-IC	LDO, 3.8V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C38	-	XC6209C382DR	LVR-IC	LDO, 3.8V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C39	-	LN6219C392DR	LVR-IC	LDO, 3.9V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C39	-	XC6209C392DR	LVR-IC	LDO, 3.9V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C3A	-	LN6219C30ADR	LVR-IC	LDO, 3.05V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C3A	-	XC6209C30ADR	LVR-IC	LDO, 3.05V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C3B	-	LN6219C31ADR	LVR-IC	LDO, 3.15V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C3B	-	XC6209C31ADR	LVR-IC	LDO, 3.15V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C3C	-	LN6219C32ADR	LVR-IC	LDO, 3.25V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C3C	-	XC6209C32ADR	LVR-IC	LDO, 3.25V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C3D	-	LN6219C33ADR	LVR-IC	LDO, 3.35V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C3D	-	XC6209C33ADR	LVR-IC	LDO, 3.35V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C3E	-	LN6219C34ADR	LVR-IC	LDO, 3.45V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C3E	-	XC6209C34ADR	LVR-IC	LDO, 3.45V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C3F	-	LN6219C35ADR	LVR-IC	LDO, 3.55V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C3F	-	XC6209C35ADR	LVR-IC	LDO, 3.55V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C3H	-	LN6219C36ADR	LVR-IC	LDO, 3.65V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C3H	-	XC6209C36ADR	LVR-IC	LDO, 3.65V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C3K	-	LN6219C37ADR	LVR-IC	LDO, 3.75V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C3K	-	XC6209C37ADR	LVR-IC	LDO, 3.75V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C3L	-	LN6219C38ADR	LVR-IC	LDO, 3.85V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C3L	-	XC6209C38ADR	LVR-IC	LDO, 3.85V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C3M	-	LN6219C39ADR	LVR-IC	LDO, 3.95V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C3M	-	XC6209C39ADR	LVR-IC	LDO, 3.95V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C40	-	LN6219C402DR	LVR-IC	LDO, 4.0V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C40	-	XC6209C402DR	LVR-IC	LDO, 4.0V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C41	-	LN6219C412DR	LVR-IC	LDO, 4.1V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C41	-	XC6209C412DR	LVR-IC	LDO, 4.1V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
09C42	-	LN6219C422DR	LVR-IC	LDO, 4.2V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C42	-	XC6209C422DR	LVR-IC	LDO, 4.2V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C43	-	LN6219C432DR	LVR-IC	LDO, 4.3V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C43	-	XC6209C432DR	LVR-IC	LDO, 4.3V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C44	-	LN6219C442DR	LVR-IC	LDO, 4.4V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C44	-	XC6209C442DR	LVR-IC	LDO, 4.4V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C45	-	LN6219C452DR	LVR-IC	LDO, 4.5V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C45	-	XC6209C452DR	LVR-IC	LDO, 4.5V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C46	-	LN6219C462DR	LVR-IC	LDO, 4.6V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C46	-	XC6209C462DR	LVR-IC	LDO, 4.6V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C47	-	LN6219C472DR	LVR-IC	LDO, 4.7V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C47	-	XC6209C472DR	LVR-IC	LDO, 4.7V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C48	-	LN6219C482DR	LVR-IC	LDO, 4.8V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C48	-	XC6209C482DR	LVR-IC	LDO, 4.8V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C49	-	LN6219C492DR	LVR-IC	LDO, 4.9V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C49	-	XC6209C492DR	LVR-IC	LDO, 4.9V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C4A	-	LN6219C40ADR	LVR-IC	LDO, 4.05V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C4A	-	XC6209C40ADR	LVR-IC	LDO, 4.05V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C4B	-	LN6219C41ADR	LVR-IC	LDO, 4.15V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C4B	-	XC6209C41ADR	LVR-IC	LDO, 4.15V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C4C	-	LN6219C42ADR	LVR-IC	LDO, 4.25V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C4C	-	XC6209C42ADR	LVR-IC	LDO, 4.25V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C4D	-	LN6219C43ADR	LVR-IC	LDO, 4.35V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C4D	-	XC6209C43ADR	LVR-IC	LDO, 4.35V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C4E	-	LN6219C44ADR	LVR-IC	LDO, 4.45V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C4E	-	XC6209C44ADR	LVR-IC	LDO, 4.45V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C4F	-	LN6219C45ADR	LVR-IC	LDO, 4.55V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C4F	-	XC6209C45ADR	LVR-IC	LDO, 4.55V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C4H	-	LN6219C46ADR	LVR-IC	LDO, 4.65V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C4H	-	XC6209C46ADR	LVR-IC	LDO, 4.65V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C4K	-	LN6219C47ADR	LVR-IC	LDO, 4.75V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C4K	-	XC6209C47ADR	LVR-IC	LDO, 4.75V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C4L	-	LN6219C48ADR	LVR-IC	LDO, 4.85V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C4L	-	XC6209C48ADR	LVR-IC	LDO, 4.85V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C4M	-	LN6219C49ADR	LVR-IC	LDO, 4.95V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C4M	-	XC6209C49ADR	LVR-IC	LDO, 4.95V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C50	-	LN6219C502DR	LVR-IC	LDO, 5.0V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Inw
09C50	-	XC6209C502DR	LVR-IC	LDO, 5.0V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C51	-	XC6209C512DR	LVR-IC	LDO, 5.1V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C52	-	XC6209C522DR	LVR-IC	LDO, 5.2V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C53	-	XC6209C532DR	LVR-IC	LDO, 5.3V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C54	-	XC6209C542DR	LVR-IC	LDO, 5.4V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C55	-	XC6209C552DR	LVR-IC	LDO, 5.5V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C56	-	XC6209C562DR	LVR-IC	LDO, 5.6V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C57	-	XC6209C572DR	LVR-IC	LDO, 5.7V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C58	-	XC6209C582DR	LVR-IC	LDO, 5.8V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C59	-	XC6209C592DR	LVR-IC	LDO, 5.9V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C5A	-	XC6209C50ADR	LVR-IC	LDO, 5.05V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C5B	-	XC6209C51ADR	LVR-IC	LDO, 5.15V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C5C	-	XC6209C52ADR	LVR-IC	LDO, 5.25V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C5D	-	XC6209C53ADR	LVR-IC	LDO, 5.35V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C5E	-	XC6209C54ADR	LVR-IC	LDO, 5.45V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C5F	-	XC6209C55ADR	LVR-IC	LDO, 5.55V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C5H	-	XC6209C56ADR	LVR-IC	LDO, 5.65V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C5K	-	XC6209C57ADR	LVR-IC	LDO, 5.75V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C5L	-	XC6209C58ADR	LVR-IC	LDO, 5.85V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C5M	-	XC6209C59ADR	LVR-IC	LDO, 5.95V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09C60	-	XC6209C602DR	LVR-IC	LDO, 6.0V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
09D	-	AP6209-20GU	LVR-IC	LDO, 2.0V±2%, 250mA, Halogen-free	UFN-6	56us	VR1	9ia	Anw
09D	-	AP6209-20PU	LVR-IC	LDO, 2.0V±2%, 250mA	UFN-6	56us	VR1	9i	Anw
09D00	-	XC6209D092DR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D09	-	LN6219D092DR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D0M	-	LN6219D09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D0M	-	XC6209D09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D10	-	LN6219D102DR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D10	-	XC6209D102DR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D11	-	LN6219D112DR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D11	-	XC6209D112DR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D12	-	LN6219D122DR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D12	-	XC6209D122DR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
09D13	-	LN6219D132DR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D13	-	XC6209D132DR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D14	-	LN6219D142DR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D14	-	XC6209D142DR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D15	-	LN6219D152DR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D15	-	XC6209D152DR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D16	-	LN6219D162DR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D16	-	XC6209D162DR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D17	-	LN6219D172DR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D17	-	XC6209D172DR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D18	-	LN6219D182DR	LVR-IC	LDO, 1.8V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D18	-	XC6209D182DR	LVR-IC	LDO, 1.8V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D19	-	LN6219D192DR	LVR-IC	LDO, 1.9V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D19	-	XC6209D192DR	LVR-IC	LDO, 1.9V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D1A	-	LN6219D10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D1A	-	XC6209D10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D1B	-	LN6219D11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D1B	-	XC6209D11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D1C	-	LN6219D12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D1C	-	XC6209D12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D1D	-	LN6219D13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D1D	-	XC6209D13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D1E	-	LN6219D14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D1E	-	XC6209D14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D1F	-	LN6219D15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D1F	-	XC6209D15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D1H	-	LN6219D16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D1H	-	XC6209D16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D1K	-	LN6219D17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D1K	-	XC6209D17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D1L	-	LN6219D18ADR	LVR-IC	LDO, 1.85V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D1L	-	XC6209D18ADR	LVR-IC	LDO, 1.85V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D1M	-	LN6219D19ADR	LVR-IC	LDO, 1.95V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D1M	-	XC6209D19ADR	LVR-IC	LDO, 1.95V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D20	-	LN6219D202DR	LVR-IC	LDO, 2.0V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D20	-	XC6209D202DR	LVR-IC	LDO, 2.0V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D21	-	LN6219D212DR	LVR-IC	LDO, 2.1V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D21	-	XC6209D212DR	LVR-IC	LDO, 2.1V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D22	-	LN6219D222DR	LVR-IC	LDO, 2.2V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D22	-	XC6209D222DR	LVR-IC	LDO, 2.2V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D23	-	LN6219D232DR	LVR-IC	LDO, 2.3V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D23	-	XC6209D232DR	LVR-IC	LDO, 2.3V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D24	-	LN6219D242DR	LVR-IC	LDO, 2.4V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D24	-	XC6209D242DR	LVR-IC	LDO, 2.4V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D25	-	LN6219D252DR	LVR-IC	LDO, 2.5V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D25	-	XC6209D252DR	LVR-IC	LDO, 2.5V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D26	-	LN6219D262DR	LVR-IC	LDO, 2.6V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D26	-	XC6209D262DR	LVR-IC	LDO, 2.6V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D27	-	LN6219D272DR	LVR-IC	LDO, 2.7V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D27	-	XC6209D272DR	LVR-IC	LDO, 2.7V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D28	-	LN6219D282DR	LVR-IC	LDO, 2.8V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D28	-	XC6209D282DR	LVR-IC	LDO, 2.8V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D29	-	LN6219D292DR	LVR-IC	LDO, 2.9V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D29	-	XC6209D292DR	LVR-IC	LDO, 2.9V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D2A	-	LN6219D20ADR	LVR-IC	LDO, 2.05V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D2A	-	XC6209D20ADR	LVR-IC	LDO, 2.05V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D2B	-	LN6219D21ADR	LVR-IC	LDO, 2.15V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D2B	-	XC6209D21ADR	LVR-IC	LDO, 2.15V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D2C	-	LN6219D22ADR	LVR-IC	LDO, 2.25V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D2C	-	XC6209D22ADR	LVR-IC	LDO, 2.25V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D2D	-	LN6219D23ADR	LVR-IC	LDO, 2.35V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D2D	-	XC6209D23ADR	LVR-IC	LDO, 2.35V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D2E	-	LN6219D24ADR	LVR-IC	LDO, 2.45V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D2E	-	XC6209D24ADR	LVR-IC	LDO, 2.45V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D2F	-	LN6219D25ADR	LVR-IC	LDO, 2.55V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D2F	-	XC6209D25ADR	LVR-IC	LDO, 2.55V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D2H	-	LN6219D26ADR	LVR-IC	LDO, 2.65V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D2H	-	XC6209D26ADR	LVR-IC	LDO, 2.65V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D2K	-	LN6219D27ADR	LVR-IC	LDO, 2.75V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D2K	-	XC6209D27ADR	LVR-IC	LDO, 2.75V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
09D2L	-	LN6219D28ADR	LVR-IC	LDO, 2.85V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D2L	-	XC6209D28ADR	LVR-IC	LDO, 2.85V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D2M	-	LN6219D29ADR	LVR-IC	LDO, 2.95V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D2M	-	XC6209D29ADR	LVR-IC	LDO, 2.95V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D30	-	LN6219D302DR	LVR-IC	LDO, 3.0V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D30	-	XC6209D302DR	LVR-IC	LDO, 3.0V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D31	-	LN6219D312DR	LVR-IC	LDO, 3.1V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D31	-	XC6209D312DR	LVR-IC	LDO, 3.1V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D32	-	LN6219D322DR	LVR-IC	LDO, 3.2V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D32	-	XC6209D322DR	LVR-IC	LDO, 3.2V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D33	-	LN6219D332DR	LVR-IC	LDO, 3.3V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D33	-	XC6209D332DR	LVR-IC	LDO, 3.3V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D34	-	LN6219D342DR	LVR-IC	LDO, 3.4V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D34	-	XC6209D342DR	LVR-IC	LDO, 3.4V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D35	-	LN6219D352DR	LVR-IC	LDO, 3.5V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D35	-	XC6209D352DR	LVR-IC	LDO, 3.5V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D36	-	LN6219D362DR	LVR-IC	LDO, 3.6V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D36	-	XC6209D362DR	LVR-IC	LDO, 3.6V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D37	-	LN6219D372DR	LVR-IC	LDO, 3.7V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D37	-	XC6209D372DR	LVR-IC	LDO, 3.7V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D38	-	LN6219D382DR	LVR-IC	LDO, 3.8V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D38	-	XC6209D382DR	LVR-IC	LDO, 3.8V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D39	-	LN6219D392DR	LVR-IC	LDO, 3.9V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D39	-	XC6209D392DR	LVR-IC	LDO, 3.9V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D3A	-	LN6219D30ADR	LVR-IC	LDO, 3.05V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D3A	-	XC6209D30ADR	LVR-IC	LDO, 3.05V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D3B	-	LN6219D31ADR	LVR-IC	LDO, 3.15V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D3B	-	XC6209D31ADR	LVR-IC	LDO, 3.15V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D3C	-	LN6219D32ADR	LVR-IC	LDO, 3.25V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D3C	-	XC6209D32ADR	LVR-IC	LDO, 3.25V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D3D	-	LN6219D33ADR	LVR-IC	LDO, 3.35V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D3D	-	XC6209D33ADR	LVR-IC	LDO, 3.35V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D3E	-	LN6219D34ADR	LVR-IC	LDO, 3.45V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D3E	-	XC6209D34ADR	LVR-IC	LDO, 3.45V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D3F	-	LN6219D35ADR	LVR-IC	LDO, 3.55V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D3F	-	XC6209D35ADR	LVR-IC	LDO, 3.55V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D3H	-	LN6219D36ADR	LVR-IC	LDO, 3.65V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D3H	-	XC6209D36ADR	LVR-IC	LDO, 3.65V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D3K	-	LN6219D37ADR	LVR-IC	LDO, 3.75V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D3K	-	XC6209D37ADR	LVR-IC	LDO, 3.75V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D3L	-	LN6219D38ADR	LVR-IC	LDO, 3.85V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D3L	-	XC6209D38ADR	LVR-IC	LDO, 3.85V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D3M	-	LN6219D39ADR	LVR-IC	LDO, 3.95V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D3M	-	XC6209D39ADR	LVR-IC	LDO, 3.95V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D40	-	LN6219D402DR	LVR-IC	LDO, 4.0V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D40	-	XC6209D402DR	LVR-IC	LDO, 4.0V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D41	-	LN6219D412DR	LVR-IC	LDO, 4.1V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D41	-	XC6209D412DR	LVR-IC	LDO, 4.1V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D42	-	LN6219D422DR	LVR-IC	LDO, 4.2V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D42	-	XC6209D422DR	LVR-IC	LDO, 4.2V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D43	-	LN6219D432DR	LVR-IC	LDO, 4.3V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D43	-	XC6209D432DR	LVR-IC	LDO, 4.3V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D44	-	LN6219D442DR	LVR-IC	LDO, 4.4V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D44	-	XC6209D442DR	LVR-IC	LDO, 4.4V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D45	-	LN6219D452DR	LVR-IC	LDO, 4.5V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D45	-	XC6209D452DR	LVR-IC	LDO, 4.5V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D46	-	LN6219D462DR	LVR-IC	LDO, 4.6V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D46	-	XC6209D462DR	LVR-IC	LDO, 4.6V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D47	-	LN6219D472DR	LVR-IC	LDO, 4.7V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D47	-	XC6209D472DR	LVR-IC	LDO, 4.7V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D48	-	LN6219D482DR	LVR-IC	LDO, 4.8V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D48	-	XC6209D482DR	LVR-IC	LDO, 4.8V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D49	-	LN6219D492DR	LVR-IC	LDO, 4.9V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D49	-	XC6209D492DR	LVR-IC	LDO, 4.9V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D4A	-	LN6219D40ADR	LVR-IC	LDO, 4.05V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D4A	-	XC6209D40ADR	LVR-IC	LDO, 4.05V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D4B	-	LN6219D41ADR	LVR-IC	LDO, 4.15V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D4B	-	XC6209D41ADR	LVR-IC	LDO, 4.15V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D4C	-	LN6219D42ADR	LVR-IC	LDO, 4.25V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D4C	-	XC6209D42ADR	LVR-IC	LDO, 4.25V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
09D4D	-	LN6219D43ADR	LVR-IC	LDO, 4.35V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D4D	-	XC6209D43ADR	LVR-IC	LDO, 4.35V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D4E	-	LN6219D44ADR	LVR-IC	LDO, 4.45V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D4E	-	XC6209D44ADR	LVR-IC	LDO, 4.45V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D4F	-	LN6219D45ADR	LVR-IC	LDO, 4.55V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D4F	-	XC6209D45ADR	LVR-IC	LDO, 4.55V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D4H	-	LN6219D46ADR	LVR-IC	LDO, 4.65V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D4H	-	XC6209D46ADR	LVR-IC	LDO, 4.65V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D4K	-	LN6219D47ADR	LVR-IC	LDO, 4.75V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D4K	-	XC6209D47ADR	LVR-IC	LDO, 4.75V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D4L	-	LN6219D48ADR	LVR-IC	LDO, 4.85V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D4L	-	XC6209D48ADR	LVR-IC	LDO, 4.85V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D4M	-	LN6219D49ADR	LVR-IC	LDO, 4.95V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D4M	-	XC6209D49ADR	LVR-IC	LDO, 4.95V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D50	-	LN6219D502DR	LVR-IC	LDO, 5.0V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Inw
09D50	-	XC6209D502DR	LVR-IC	LDO, 5.0V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D51	-	XC6209D512DR	LVR-IC	LDO, 5.1V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D52	-	XC6209D522DR	LVR-IC	LDO, 5.2V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D53	-	XC6209D532DR	LVR-IC	LDO, 5.3V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D54	-	XC6209D542DR	LVR-IC	LDO, 5.4V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D55	-	XC6209D552DR	LVR-IC	LDO, 5.5V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D56	-	XC6209D562DR	LVR-IC	LDO, 5.6V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D57	-	XC6209D572DR	LVR-IC	LDO, 5.7V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D58	-	XC6209D582DR	LVR-IC	LDO, 5.8V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D59	-	XC6209D592DR	LVR-IC	LDO, 5.9V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D5A	-	XC6209D50ADR	LVR-IC	LDO, 5.05V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D5B	-	XC6209D51ADR	LVR-IC	LDO, 5.15V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D5C	-	XC6209D52ADR	LVR-IC	LDO, 5.25V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D5D	-	XC6209D53ADR	LVR-IC	LDO, 5.35V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D5E	-	XC6209D54ADR	LVR-IC	LDO, 5.45V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D5F	-	XC6209D55ADR	LVR-IC	LDO, 5.55V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D5H	-	XC6209D56ADR	LVR-IC	LDO, 5.65V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D5K	-	XC6209D57ADR	LVR-IC	LDO, 5.75V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D5L	-	XC6209D58ADR	LVR-IC	LDO, 5.85V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D5M	-	XC6209D59ADR	LVR-IC	LDO, 5.95V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09D60	-	XC6209D602DR	LVR-IC	LDO, 6.0V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
09E	-	AP6209-22GU	LVR-IC	LDO, 2.2V±2%, 250mA, Halogen-free	UFN-6	56us	VR1	9ia	Anw
09E	-	AP6209-22PU	LVR-IC	LDO, 2.2V±2%, 250mA	UFN-6	56us	VR1	9i	Anw
09G	-	AP6209-25GU	LVR-IC	LDO, 2.5V±2%, 250mA, Halogen-free	UFN-6	56us	VR1	9ia	Anw
09G	-	AP6209-25PU	LVR-IC	LDO, 2.5V±2%, 250mA	UFN-6	56us	VR1	9i	Anw
09J	-	AP6209-27GU	LVR-IC	LDO, 2.7V±2%, 250mA, Halogen-free	UFN-6	56us	VR1	9ia	Anw
09J	-	AP6209-27PU	LVR-IC	LDO, 2.7V±2%, 250mA	UFN-6	56us	VR1	9i	Anw
09K	-	AP6209-28GU	LVR-IC	LDO, 2.8V±2%, 250mA, Halogen-free	UFN-6	56us	VR1	9ia	Anw
09K	-	AP6209-28PU	LVR-IC	LDO, 2.8V±2%, 250mA	UFN-6	56us	VR1	9i	Anw
09M	-	AP6209-30GU	LVR-IC	LDO, 3.0V±2%, 250mA, Halogen-free	UFN-6	56us	VR1	9ia	Anw
09M	-	AP6209-30PU	LVR-IC	LDO, 3.0V±2%, 250mA	UFN-6	56us	VR1	9i	Anw
09Q	-	AP6209-33GU	LVR-IC	LDO, 3.3V±2%, 250mA, Halogen-free	UFN-6	56us	VR1	9ia	Anw
09Q	-	AP6209-33PU	LVR-IC	LDO, 3.3V±2%, 250mA	UFN-6	56us	VR1	9i	Anw
09S	-	AP6209-42GU	LVR-IC	LDO, 4.2V±2%, 250mA, Halogen-free	UFN-6	56us	VR1	9ia	Anw
09S	-	AP6209-42PU	LVR-IC	LDO, 4.2V±2%, 250mA	UFN-6	56us	VR1	9i	Anw
09T	-	AP6209-35GU	LVR-IC	LDO, 3.5V±2%, 250mA, Halogen-free	UFN-6	56us	VR1	9ia	Anw
09T	-	AP6209-35PU	LVR-IC	LDO, 3.5V±2%, 250mA	UFN-6	56us	VR1	9i	Anw
09V	-	AP6209-36GU	LVR-IC	LDO, 3.6V±2%, 250mA, Halogen-free	UFN-6	56us	VR1	9ia	Anw
09V	-	AP6209-36PU	LVR-IC	LDO, 3.6V±2%, 250mA	UFN-6	56us	VR1	9i	Anw
09Z	-	AP6209-50GU	LVR-IC	LDO, 5.0V±2%, 250mA, Halogen-free	UFN-6	56us	VR1	9ia	Anw
09Z	-	AP6209-50PU	LVR-IC	LDO, 5.0V±2%, 250mA	UFN-6	56us	VR1	9i	Anw
0A	-	RP103K241D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
0A	-	RP111L281D	LVR-IC	LDO, 2.8V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
0A	-	RP202K321D	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
0A	-	XC6221A4117R	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0A	-	XC6221C1817R	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0A	-	XC6223A2019R-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0A	-	XC6224A1817R	LVR-IC	LDO, 1.8V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
0A	-	XC6229D1711R-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0A0	-	XC6120C10H	Vdet-IC	1V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0A0	-	XC6221C311GR	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0A1	-	XC6120C11H	Vdet-IC	1.1V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0A1	-	XC6221C321GR	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0A151	-	XC6366A151ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A152	-	XC6366A152ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0A153	-	XC6366A153ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A155	-	XC6366A155ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A161	-	XC6366A161ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A162	-	XC6366A162ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A163	-	XC6366A163ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A165	-	XC6366A165ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A171	-	XC6366A171ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A172	-	XC6366A172ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A173	-	XC6366A173ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A175	-	XC6366A175ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A181	-	XC6366A181ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A182	-	XC6366A182ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A183	-	XC6366A183ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A185	-	XC6366A185ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A191	-	XC6366A191ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A192	-	XC6366A192ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A193	-	XC6366A193ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A195	-	XC6366A195ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A2	-	XC6120C12H	Vdet-IC	1.2V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0A2	-	XC6221C331GR	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0A201	-	XC6366A201ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A202	-	XC6366A202ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A203	-	XC6366A203ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A205	-	XC6366A205ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A211	-	XC6366A211ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A212	-	XC6366A212ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A213	-	XC6366A213ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A215	-	XC6366A215ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A221	-	XC6366A221ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A222	-	XC6366A222ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A223	-	XC6366A223ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A225	-	XC6366A225ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A231	-	XC6366A231ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A232	-	XC6366A232ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A233	-	XC6366A233ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A235	-	XC6366A235ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A241	-	XC6366A241ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A242	-	XC6366A242ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A243	-	XC6366A243ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A245	-	XC6366A245ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A251	-	XC6366A251ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A252	-	XC6366A252ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A253	-	XC6366A253ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A255	-	XC6366A255ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A261	-	XC6366A261ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A262	-	XC6366A262ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A263	-	XC6366A263ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A265	-	XC6366A265ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A271	-	XC6366A271ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A272	-	XC6366A272ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A273	-	XC6366A273ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A275	-	XC6366A275ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A281	-	XC6366A281ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A282	-	XC6366A282ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A283	-	XC6366A283ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A285	-	XC6366A285ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A291	-	XC6366A291ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A292	-	XC6366A292ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A293	-	XC6366A293ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A295	-	XC6366A295ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A3	-	XC6120C13H	Vdet-IC	1.3V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0A3	-	XC6221C341GR	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0A301	-	XC6366A301ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A302	-	XC6366A302ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A303	-	XC6366A303ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A305	-	XC6366A305ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A311	-	XC6366A311ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A312	-	XC6366A312ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A313	-	XC6366A313ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A315	-	XC6366A315ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0A321	-	XC6366A321ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A322	-	XC6366A322ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A323	-	XC6366A323ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A325	-	XC6366A325ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A331	-	XC6366A331ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A332	-	XC6366A332ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A333	-	XC6366A333ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A335	-	XC6366A335ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A341	-	XC6366A341ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A342	-	XC6366A342ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A343	-	XC6366A343ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A345	-	XC6366A345ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A351	-	XC6366A351ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A352	-	XC6366A352ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A353	-	XC6366A353ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A355	-	XC6366A355ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A361	-	XC6366A361ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A362	-	XC6366A362ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A363	-	XC6366A363ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A365	-	XC6366A365ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A371	-	XC6366A371ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A372	-	XC6366A372ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A373	-	XC6366A373ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A375	-	XC6366A375ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A381	-	XC6366A381ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A382	-	XC6366A382ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A383	-	XC6366A383ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A385	-	XC6366A385ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A391	-	XC6366A391ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A392	-	XC6366A392ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A393	-	XC6366A393ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A395	-	XC6366A395ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A4	-	XC6120C14H	Vdet-IC	1.4V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0A4	-	XC6221C351GR	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0A401	-	XC6366A401ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A402	-	XC6366A402ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A403	-	XC6366A403ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A405	-	XC6366A405ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A411	-	XC6366A411ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A412	-	XC6366A412ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A413	-	XC6366A413ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A415	-	XC6366A415ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A421	-	XC6366A421ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A422	-	XC6366A422ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A423	-	XC6366A423ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A425	-	XC6366A425ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A431	-	XC6366A431ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A432	-	XC6366A432ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A433	-	XC6366A433ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A435	-	XC6366A435ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A441	-	XC6366A441ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A442	-	XC6366A442ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A443	-	XC6366A443ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A445	-	XC6366A445ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A451	-	XC6366A451ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A452	-	XC6366A452ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A453	-	XC6366A453ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A455	-	XC6366A455ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A461	-	XC6366A461ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A462	-	XC6366A462ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A463	-	XC6366A463ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A465	-	XC6366A465ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A471	-	XC6366A471ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A472	-	XC6366A472ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A473	-	XC6366A473ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A475	-	XC6366A475ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A481	-	XC6366A481ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A482	-	XC6366A482ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A483	-	XC6366A483ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A485	-	XC6366A485ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0A491	-	XC6366A491ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A492	-	XC6366A492ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A493	-	XC6366A493ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A495	-	XC6366A495ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A5	-	XC6120C15H	Vdet-IC	1.5V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0A5	-	XC6221C361GR	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0A501	-	XC6366A501ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A502	-	XC6366A502ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A503	-	XC6366A503ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A505	-	XC6366A505ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A511	-	XC6366A511ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A512	-	XC6366A512ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A513	-	XC6366A513ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A515	-	XC6366A515ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A521	-	XC6366A521ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A522	-	XC6366A522ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A523	-	XC6366A523ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A525	-	XC6366A525ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A531	-	XC6366A531ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A532	-	XC6366A532ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A533	-	XC6366A533ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A535	-	XC6366A535ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A541	-	XC6366A541ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A542	-	XC6366A542ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A543	-	XC6366A543ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A545	-	XC6366A545ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A551	-	XC6366A551ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A552	-	XC6366A552ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A553	-	XC6366A553ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A555	-	XC6366A555ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A561	-	XC6366A561ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A562	-	XC6366A562ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A563	-	XC6366A563ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A565	-	XC6366A565ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A571	-	XC6366A571ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A572	-	XC6366A572ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A573	-	XC6366A573ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A575	-	XC6366A575ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A581	-	XC6366A581ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A582	-	XC6366A582ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A583	-	XC6366A583ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A585	-	XC6366A585ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A591	-	XC6366A591ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A592	-	XC6366A592ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A593	-	XC6366A593ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A595	-	XC6366A595ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A6	-	XC6120C16H	Vdet-IC	1.6V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0A6	-	XC6221C371GR	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0A601	-	XC6366A601ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 6.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A602	-	XC6366A602ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 6.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A603	-	XC6366A603ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 6.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A605	-	XC6366A605ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 6.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
0A7	-	XC6120C17H	Vdet-IC	1.7V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0A7	-	XC6221C381GR	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0A8	-	XC6120C18H	Vdet-IC	1.8V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0A8	-	XC6221C391GR	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0A9	-	XC6120C19H	Vdet-IC	1.9V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0A9	-	XC6221C401GR	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0AA	-	XC6221C411GR	LVR-IC	LDO, 4.1±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0AB	-	XC6221C421GR	LVR-IC	LDO, 4.2±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0AC	-	XC6221C431GR	LVR-IC	LDO, 4.3±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0AD	-	XC6221C441GR	LVR-IC	LDO, 4.4±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0AE	-	XC6221C451GR	LVR-IC	LDO, 4.5±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0AF	-	XC6221C461GR	LVR-IC	LDO, 4.6±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0AH	-	XC6221C471GR	LVR-IC	LDO, 4.7±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0AK	-	XC6221C481GR	LVR-IC	LDO, 4.8±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0AL	-	XC6221C491GR	LVR-IC	LDO, 4.9±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0AM	-	XC6221C501GR	LVR-IC	LDO, 5.0±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0B	-	RP111L281D5	LVR-IC	LDO, 2.85V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
0B	-	RP202K331D	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0B	-	XC6221A4217R	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0B	-	XC6221C1917R	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0B	-	XC6223A2119R-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0B	-	XC6224A1917R	LVR-IC	LDO, 1.9V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
0B	-	XC6229D17B1R-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0B0	-	XC6120C20H	Vdet-IC	2V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0B1	-	XC6120C21H	Vdet-IC	2.1V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0B1	-	XC6221D321GR	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0B101	-	XC6366B101ER	DC-DC-IC	PWM/PFM st-down, 100kHz, Adj. 1.5..6V±2.5%, 1A, +CE	USP-6C	49zp	DC18	9b	Tor
0B102	-	XC6366B102ER	DC-DC-IC	PWM/PFM st-down, 180kHz, Adj. 1.5..6V±2.5%, 1A, +CE	USP-6C	49zp	DC18	9b	Tor
0B103	-	XC6366B103ER	DC-DC-IC	PWM/PFM st-down, 300kHz, Adj. 1.5..6V±2.5%, 1A, +CE	USP-6C	49zp	DC18	9b	Tor
0B104	-	XC6366B105ER	DC-DC-IC	PWM/PFM st-down, 500kHz, Adj. 1.5..6V±2.5%, 1A, +CE	USP-6C	49zp	DC18	9b	Tor
0B2	-	XC6120C22H	Vdet-IC	2.2V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0B2	-	XC6221D331GR	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0B3	-	XC6120C23H	Vdet-IC	2.3V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0B3	-	XC6221D341GR	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0B4	-	XC6120C24H	Vdet-IC	2.4V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0B4	-	XC6221D351GR	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0B5	-	XC6120C25H	Vdet-IC	2.5V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0B5	-	XC6221D361GR	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0B6	-	XC6120C26H	Vdet-IC	2.6V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0B6	-	XC6221D371GR	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0B7	-	XC6120C27H	Vdet-IC	2.7V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0B7	-	XC6221D381GR	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0B8	-	XC6120C28H	Vdet-IC	2.8V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0B8	-	XC6221D391GR	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0B9	-	XC6120C29H	Vdet-IC	2.9V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0B9	-	XC6221D401GR	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0BA	-	XC6221D411GR	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0BB	-	XC6221D421GR	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0BC	-	XC6221D431GR	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0BD	-	XC6221D441GR	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0BE	-	XC6221D451GR	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0BF	-	XC6221D461GR	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0BH	-	XC6221D471GR	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0BK	-	XC6221D481GR	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0BL	-	XC6221D491GR	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0BM	-	XC6221D501GR	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0C	-	RP111L291D	LVR-IC	LDO, 2.9V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
0C	-	RP202K341D	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
0C	-	XC6221A4317R	LVR-IC	LDO, 4.3V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0C	-	XC6221C2017R	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0C	-	XC6223A2219R-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0C	-	XC6224A2017R	LVR-IC	LDO, 2.0V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
0C	-	XC6229D1811R-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0C0	-	XC6120C30H	Vdet-IC	3V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0C1	-	XC6120C31H	Vdet-IC	3.1V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0C151	-	XC6366C151ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C152	-	XC6366C152ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C153	-	XC6366C153ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C155	-	XC6366C155ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C161	-	XC6366C161ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C162	-	XC6366C162ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C163	-	XC6366C163ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C165	-	XC6366C165ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C171	-	XC6366C171ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C172	-	XC6366C172ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C173	-	XC6366C173ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C175	-	XC6366C175ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C181	-	XC6366C181ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C182	-	XC6366C182ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C183	-	XC6366C183ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C185	-	XC6366C185ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C191	-	XC6366C191ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 1.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C192	-	XC6366C192ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 1.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C193	-	XC6366C193ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 1.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C195	-	XC6366C195ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 1.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C2	-	XC6120C32H	Vdet-IC	3.2V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0C201	-	XC6366C201ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C202	-	XC6366C202ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0C203	-	XC6366C203ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C205	-	XC6366C205ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C211	-	XC6366C211ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C212	-	XC6366C212ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C213	-	XC6366C213ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C215	-	XC6366C215ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C221	-	XC6366C221ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C222	-	XC6366C222ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C223	-	XC6366C223ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C225	-	XC6366C225ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C231	-	XC6366C231ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C232	-	XC6366C232ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C233	-	XC6366C233ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C235	-	XC6366C235ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C241	-	XC6366C241ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C242	-	XC6366C242ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C243	-	XC6366C243ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C245	-	XC6366C245ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C251	-	XC6366C251ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C252	-	XC6366C252ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C253	-	XC6366C253ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C255	-	XC6366C255ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C261	-	XC6366C261ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C262	-	XC6366C262ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C263	-	XC6366C263ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C265	-	XC6366C265ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C271	-	XC6366C271ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C272	-	XC6366C272ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C273	-	XC6366C273ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C275	-	XC6366C275ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C281	-	XC6366C281ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C282	-	XC6366C282ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C283	-	XC6366C283ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C285	-	XC6366C285ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C291	-	XC6366C291ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 2.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C292	-	XC6366C292ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 2.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C293	-	XC6366C293ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 2.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C295	-	XC6366C295ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 2.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C3	-	XC6120C33H	Vdet-IC	3.3V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0C301	-	XC6366C301ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C302	-	XC6366C302ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C303	-	XC6366C303ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C305	-	XC6366C305ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C311	-	XC6366C311ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C312	-	XC6366C312ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C313	-	XC6366C313ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C315	-	XC6366C315ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C321	-	XC6366C321ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C322	-	XC6366C322ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C323	-	XC6366C323ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C325	-	XC6366C325ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C331	-	XC6366C331ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C332	-	XC6366C332ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C333	-	XC6366C333ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C335	-	XC6366C335ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C341	-	XC6366C341ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C342	-	XC6366C342ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C343	-	XC6366C343ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C345	-	XC6366C345ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C351	-	XC6366C351ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C352	-	XC6366C352ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C353	-	XC6366C353ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C355	-	XC6366C355ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C361	-	XC6366C361ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C362	-	XC6366C362ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C363	-	XC6366C363ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C365	-	XC6366C365ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C371	-	XC6366C371ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C372	-	XC6366C372ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C373	-	XC6366C373ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0C375	-	XC6366C375ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C381	-	XC6366C381ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C382	-	XC6366C382ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C383	-	XC6366C383ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C385	-	XC6366C385ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C391	-	XC6366C391ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 3.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C392	-	XC6366C392ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 3.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C393	-	XC6366C393ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 3.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C395	-	XC6366C395ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 3.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C4	-	XC6120C34H	Vdet-IC	3.4V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0C401	-	XC6366C401ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C402	-	XC6366C402ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C403	-	XC6366C403ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C405	-	XC6366C405ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C411	-	XC6366C411ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C412	-	XC6366C412ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C413	-	XC6366C413ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C415	-	XC6366C415ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C421	-	XC6366C421ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C422	-	XC6366C422ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C423	-	XC6366C423ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C425	-	XC6366C425ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C431	-	XC6366C431ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C432	-	XC6366C432ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C433	-	XC6366C433ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C435	-	XC6366C435ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C441	-	XC6366C441ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C442	-	XC6366C442ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C443	-	XC6366C443ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C445	-	XC6366C445ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C451	-	XC6366C451ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C452	-	XC6366C452ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C453	-	XC6366C453ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C455	-	XC6366C455ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C461	-	XC6366C461ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C462	-	XC6366C462ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C463	-	XC6366C463ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C465	-	XC6366C465ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C471	-	XC6366C471ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C472	-	XC6366C472ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C473	-	XC6366C473ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C475	-	XC6366C475ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C481	-	XC6366C481ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C482	-	XC6366C482ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C483	-	XC6366C483ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C485	-	XC6366C485ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C491	-	XC6366C491ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 4.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C492	-	XC6366C492ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 4.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C493	-	XC6366C493ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 4.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C495	-	XC6366C495ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 4.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C5	-	XC6120C35H	Vdet-IC	3.5V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0C501	-	XC6366C501ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C502	-	XC6366C502ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C503	-	XC6366C503ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C505	-	XC6366C505ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C511	-	XC6366C511ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C512	-	XC6366C512ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C513	-	XC6366C513ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C515	-	XC6366C515ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C521	-	XC6366C521ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C522	-	XC6366C522ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C523	-	XC6366C523ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C525	-	XC6366C525ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C531	-	XC6366C531ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C532	-	XC6366C532ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C533	-	XC6366C533ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C535	-	XC6366C535ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C541	-	XC6366C541ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C542	-	XC6366C542ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C543	-	XC6366C543ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0C545	-	XC6366C545ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C551	-	XC6366C551ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C552	-	XC6366C552ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C553	-	XC6366C553ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C555	-	XC6366C555ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C561	-	XC6366C561ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C562	-	XC6366C562ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C563	-	XC6366C563ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C565	-	XC6366C565ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C571	-	XC6366C571ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C572	-	XC6366C572ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C573	-	XC6366C573ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C575	-	XC6366C575ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C581	-	XC6366C581ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C582	-	XC6366C582ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C583	-	XC6366C583ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C585	-	XC6366C585ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C591	-	XC6366C591ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 5.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C592	-	XC6366C592ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 5.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C593	-	XC6366C593ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 5.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C595	-	XC6366C595ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 5.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C6	-	XC6120C36H	Vdet-IC	3.6V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0C601	-	XC6366C601ER	DC-DC-IC	PWM/PFM st-down, 100kHz, 6.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C602	-	XC6366C602ER	DC-DC-IC	PWM/PFM st-down, 180kHz, 6.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C603	-	XC6366C603ER	DC-DC-IC	PWM/PFM st-down, 300kHz, 6.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C605	-	XC6366C605ER	DC-DC-IC	PWM/PFM st-down, 500kHz, 6.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
0C7	-	XC6120C37H	Vdet-IC	3.7V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0C8	-	XC6120C38H	Vdet-IC	3.8V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0C9	-	XC6120C39H	Vdet-IC	3.9V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0D	-	RP111L301D	LVR-IC	LDO, 3.0V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
0D	-	RP202K351D	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
0D	-	XC6221A4417R	LVR-IC	LDO, 4.4V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0D	-	XC6221C2117R	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0D	-	XC6223A2319R-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0D	-	XC6224A2117R	LVR-IC	LDO, 2.1V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
0D	-	XC6229D18B1R-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0D0	-	XC6120C40H	Vdet-IC	4V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0D1	-	XC6120C41H	Vdet-IC	4.1V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0D101	-	XC6366D101ER	DC-DC-IC	PWM/PFM st-down, 100kHz, Adj. 1.5..6V±2.5%, 1A, +CE, soft start	USP-6C	49zp	DC18	9b	Tor
0D102	-	XC6366D102ER	DC-DC-IC	PWM/PFM st-down, 180kHz, Adj. 1.5..6V±2.5%, 1A, +CE, soft start	USP-6C	49zp	DC18	9b	Tor
0D103	-	XC6366D103ER	DC-DC-IC	PWM/PFM st-down, 300kHz, Adj. 1.5..6V±2.5%, 1A, +CE, soft start	USP-6C	49zp	DC18	9b	Tor
0D104	-	XC6366D104ER	DC-DC-IC	PWM/PFM st-down, 500kHz, Adj. 1.5..6V±2.5%, 1A, +CE, soft start	USP-6C	49zp	DC18	9b	Tor
0D2	-	XC6120C42H	Vdet-IC	4.2V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0D3	-	XC6120C43H	Vdet-IC	4.3V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0D4	-	XC6120C44H	Vdet-IC	4.4V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0D5	-	XC6120C45H	Vdet-IC	4.5V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0D6	-	XC6120C46H	Vdet-IC	4.6V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0D7	-	XC6120C47H	Vdet-IC	4.7V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0D8	-	XC6120C48H	Vdet-IC	4.8V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0D9	-	XC6120C49H	Vdet-IC	4.9V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0E	-	RP111L311D	LVR-IC	LDO, 3.1V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
0E	-	RP202K361D	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
0E	-	XC6221A4517R	LVR-IC	LDO, 4.5V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0E	-	XC6221C2217R	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0E	-	XC6223A2419R-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0E	-	XC6224A2217R	LVR-IC	LDO, 2.2V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
0E	-	XC6229D1911R-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0E0	-	XC6120C50H	Vdet-IC	5V±2%, CMOS +Reset PPO	USP-3	17vdy	VD7	9a	Tor
0E7	-	XC6221C08BGR	LVR-IC	LDO, 0.85V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0E8	-	XC6221C09BGR	LVR-IC	LDO, 0.95V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0E9	-	XC6221C10BGR	LVR-IC	LDO, 1.05V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0EA	-	XC6221C11BGR	LVR-IC	LDO, 1.15V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0EB	-	XC6221C12BGR	LVR-IC	LDO, 1.25V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0EC	-	XC6221C13BGR	LVR-IC	LDO, 1.35V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0ED	-	XC6221C14BGR	LVR-IC	LDO, 1.45V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0EE	-	XC6221C15BGR	LVR-IC	LDO, 1.55V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0EF	-	XC6221C16BGR	LVR-IC	LDO, 1.65V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0EH	-	XC6221C17BGR	LVR-IC	LDO, 1.75V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0EK	-	XC6221C18BGR	LVR-IC	LDO, 1.85V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0EL	-	XC6221C19BGR	LVR-IC	LDO, 1.95V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0EM	-	XC6221C20BGR	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0EN	-	XC6221C21BGR	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0EP	-	XC6221C22BGR	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0ER	-	XC6221C23BGR	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0ES	-	XC6221C24BGR	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0ET	-	XC6221C25BGR	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0EU	-	XC6221C26BGR	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0EV	-	XC6221C27BGR	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0EX	-	XC6221C28BGR	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0EY	-	XC6221C29BGR	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0EZ	-	XC6221C30BGR	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0F	-	RP111L321D	LVR-IC	LDO, 3.2V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
0F	-	RP202K371D	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
0F	-	XC6221A4617R	LVR-IC	LDO, 4.6V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0F	-	XC6221C2317R	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0F	-	XC6223A2519R-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0F	-	XC6224A2317R	LVR-IC	LDO, 2.3V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
0F	-	XC6229D19B1R-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0F0	-	XC6120N10H	Vdet-IC	1V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0F1	-	XC6120N11H	Vdet-IC	1.1V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0F2	-	XC6120N12H	Vdet-IC	1.2V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0F3	-	XC6120N13H	Vdet-IC	1.3V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0F4	-	XC6120N14H	Vdet-IC	1.4V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0F5	-	XC6120N15H	Vdet-IC	1.5V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0F6	-	XC6120N16H	Vdet-IC	1.6V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0F7	-	XC6120N17H	Vdet-IC	1.7V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0F7	-	XC6221D08BGR	LVR-IC	LDO, 0.85V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0F8	-	XC6120N18H	Vdet-IC	1.8V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0F8	-	XC6221D09BGR	LVR-IC	LDO, 0.95V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0F9	-	XC6120N19H	Vdet-IC	1.9V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0F9	-	XC6221D10BGR	LVR-IC	LDO, 1.05V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FA	-	XC6221D11BGR	LVR-IC	LDO, 1.15V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FB	-	XC6221D12BGR	LVR-IC	LDO, 1.25V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FC	-	XC6221D13BGR	LVR-IC	LDO, 1.35V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FD	-	XC6221D14BGR	LVR-IC	LDO, 1.45V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FE	-	XC6221D15BGR	LVR-IC	LDO, 1.55V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FF	-	XC6221D16BGR	LVR-IC	LDO, 1.65V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FH	-	XC6221D17BGR	LVR-IC	LDO, 1.75V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FK	-	XC6221D18BGR	LVR-IC	LDO, 1.85V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FL	-	XC6221D19BGR	LVR-IC	LDO, 1.95V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FM	-	XC6221D20BGR	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FN	-	XC6221D21BGR	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FP	-	XC6221D22BGR	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FR	-	XC6221D23BGR	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FS	-	XC6221D24BGR	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FT	-	XC6221D25BGR	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FU	-	XC6221D26BGR	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FV	-	XC6221D27BGR	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FX	-	XC6221D28BGR	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FY	-	XC6221D29BGR	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0FZ	-	XC6221D30BGR	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0G	-	RP111L331D	LVR-IC	LDO, 3.3V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
0G	-	RP202K381D	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
0H	-	RP111L341D	LVR-IC	LDO, 3.4V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
0H	-	RP202K391D	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
0H	-	XC6221A4717R	LVR-IC	LDO, 4.7V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0H	-	XC6221C2417R	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0H	-	XC6223A2619R-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0H	-	XC6224A2417R	LVR-IC	LDO, 2.4V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
0H	-	XC6229D2011R-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0H0	-	XC6120N20H	Vdet-IC	2V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0H1	-	XC6120N21H	Vdet-IC	2.1V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0H2	-	XC6120N22H	Vdet-IC	2.2V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0H3	-	XC6120N23H	Vdet-IC	2.3V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0H4	-	XC6120N24H	Vdet-IC	2.4V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0H5	-	XC6120N25H	Vdet-IC	2.5V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0H6	-	XC6120N26H	Vdet-IC	2.6V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0H7	-	XC6120N27H	Vdet-IC	2.7V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0H8	-	XC6120N28H	Vdet-IC	2.8V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0H9	-	XC6120N29H	Vdet-IC	2.9V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0J	-	RP111L351D	LVR-IC	LDO, 3.5V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
0J	-	RP202K401D	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
0K	-	RP111L361D	LVR-IC	LDO, 3.6V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
0K	-	RP202K281D5	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
0K	-	XC6221A4817R	LVR-IC	LDO, 4.8V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0K	-	XC6221C2517R	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0K	-	XC6223A2719R-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0K	-	XC6224A2517R	LVR-IC	LDO, 2.5V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
0K	-	XC6229D20B1R-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0K0	-	XC6120N30H	Vdet-IC	3V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0K1	-	XC6120N31H	Vdet-IC	3.1V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0K2	-	XC6120N32H	Vdet-IC	3.2V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0K3	-	XC6120N33H	Vdet-IC	3.3V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0K4	-	XC6120N34H	Vdet-IC	3.4V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0K5	-	XC6120N35H	Vdet-IC	3.5V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0K6	-	XC6120N36H	Vdet-IC	3.6V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0K7	-	XC6120N37H	Vdet-IC	3.7V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0K8	-	XC6120N38H	Vdet-IC	3.8V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0K9	-	XC6120N39H	Vdet-IC	3.9V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0L	-	RP111L101D5	LVR-IC	LDO, 1.05V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
0L	-	RP202K121D5	LVR-IC	LDO, 1.25V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
0L	-	XC6221A4917R	LVR-IC	LDO, 4.9V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0L	-	XC6221C2617R	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0L	-	XC6223A2819R-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0L	-	XC6224A2617R	LVR-IC	LDO, 2.6V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
0L	-	XC6229D2111R-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0L0	-	XC6120N40H	Vdet-IC	4V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0L0	-	XC6221C31BGR	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0L1	-	XC6120N41H	Vdet-IC	4.1V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0L1	-	XC6221C32BGR	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0L2	-	XC6120N42H	Vdet-IC	4.2V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0L2	-	XC6221C33BGR	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0L3	-	XC6120N43H	Vdet-IC	4.3V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0L3	-	XC6221C34BGR	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0L4	-	XC6120N44H	Vdet-IC	4.4V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0L4	-	XC6221C35BGR	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0L5	-	XC6120N45H	Vdet-IC	4.5V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0L5	-	XC6221C36BGR	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0L6	-	XC6120N46H	Vdet-IC	4.6V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0L6	-	XC6221C37BGR	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0L7	-	XC6120N47H	Vdet-IC	4.7V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0L7	-	XC6221C38BGR	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0L8	-	XC6120N48H	Vdet-IC	4.8V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0L8	-	XC6221C39BGR	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0L9	-	XC6120N49H	Vdet-IC	4.9V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0L9	-	XC6221C40BGR	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0LA	-	XC6221C41BGR	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0LB	-	XC6221C42BGR	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0LC	-	XC6221C43BGR	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0LD	-	XC6221C44BGR	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0LE	-	XC6221C45BGR	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0LF	-	XC6221C46BGR	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0LH	-	XC6221C47BGR	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0LK	-	XC6221C48BGR	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0LL	-	XC6221C49BGR	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0M	-	RP202K291D5	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
0M	-	XC6221A5017R	LVR-IC	LDO, 5.0V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0M	-	XC6221C2717R	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0M	-	XC6223A2919R-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0M	-	XC6224A2717R	LVR-IC	LDO, 2.7V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
0M	-	XC6229D21B1R-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0M0	-	XC6120N50H	Vdet-IC	5V±2%, N-ch, +Reset ODO	USP-3	17vdy	VD6	9a	Tor
0M0	-	XC6221D31BGR	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0M1	-	XC6221D32BGR	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0M2	-	XC6221D33BGR	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0M3	-	XC6221D34BGR	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0M4	-	XC6221D35BGR	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0M5	-	XC6221D36BGR	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0M6	-	XC6221D37BGR	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0M7	-	XC6221D38BGR	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0M8	-	XC6221D39BGR	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0M9	-	XC6221D40BGR	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0MA	-	XC6221D41BGR	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0MB	-	XC6221D42BGR	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0MC	-	XC6221D43BGR	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0MD	-	XC6221D44BGR	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0ME	-	XC6221D45BGR	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0MF	-	XC6221D46BGR	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0MH	-	XC6221D47BGR	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0MK	-	XC6221D48BGR	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0ML	-	XC6221D49BGR	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0N	-	XC6221A40B7R	LVR-IC	LDO, 4.05V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0N	-	XC6221C2817R	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0N	-	XC6223A3019R-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0N	-	XC6224A2817R	LVR-IC	LDO, 2.8V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
0N	-	XC6229D2211R-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0P	-	XC6221A41B7R	LVR-IC	LDO, 4.15V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0P	-	XC6221C2917R	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0P	-	XC6223A3119R-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0P	-	XC6224A2917R	LVR-IC	LDO, 2.9V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
0P	-	XC6229D22B1R-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0R	-	XC6221A42B7R	LVR-IC	LDO, 4.25V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0R	-	XC6221C3017R	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0R	-	XC6223A3219R-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0R	-	XC6224A3017R	LVR-IC	LDO, 3.0V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
0R	-	XC6229D2311R-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0S	-	XC6221A43B7R	LVR-IC	LDO, 4.35V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0S	-	XC6221C3117R	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0S	-	XC6223A3319R-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0S	-	XC6229D23B1R-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0T	-	XC6221A44B7R	LVR-IC	LDO, 4.45V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0T	-	XC6221C3217R	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0T	-	XC6223A3419R-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0T	-	XC6229D2411R-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0U	-	XC6221A45B7R	LVR-IC	LDO, 4.55V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0U	-	XC6221C3317R	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0U	-	XC6223A3519R-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0U	-	XC6229D24B1R-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0V	-	XC6221A46B7R	LVR-IC	LDO, 4.65V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0V	-	XC6221C3417R	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0V	-	XC6223A3619R-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0V	-	XC6229D2511R-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0V7	-	XC6221C081GR	LVR-IC	LDO, 0.8V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0V8	-	XC6221C091GR	LVR-IC	LDO, 0.9V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0V9	-	XC6221C101GR	LVR-IC	LDO, 1.0V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VA	-	XC6221C111GR	LVR-IC	LDO, 1.1V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VB	-	XC6221C121GR	LVR-IC	LDO, 1.2V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VC	-	XC6221C131GR	LVR-IC	LDO, 1.3V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VD	-	XC6221C141GR	LVR-IC	LDO, 1.4V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VE	-	XC6221C151GR	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VF	-	XC6221C161GR	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VH	-	XC6221C171GR	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VK	-	XC6221C181GR	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VL	-	XC6221C191GR	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VM	-	XC6221C201GR	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VN	-	XC6221C211GR	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VP	-	XC6221C221GR	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VR	-	XC6221C231GR	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VS	-	XC6221C241GR	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VT	-	XC6221C251GR	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VU	-	XC6221C261GR	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VV	-	XC6221C271GR	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VX	-	XC6221C281GR	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VY	-	XC6221C291GR	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0VZ	-	XC6221C301GR	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
0X	-	XC6221A47B7R	LVR-IC	LDO, 4.75V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0X	-	XC6221C3517R	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0X	-	XC6223A3719R-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0X	-	XC6229D25B1R-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0X0	-	XC6221D311GR	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
0X7	-	XC6221D081GR	LVR-IC	LDO, 0.8V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0X8	-	XC6221D091GR	LVR-IC	LDO, 0.9V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0X9	-	XC6221D101GR	LVR-IC	LDO, 1.0V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XA	-	XC6221D111GR	LVR-IC	LDO, 1.1V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XB	-	XC6221D121GR	LVR-IC	LDO, 1.2V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XC	-	XC6221D131GR	LVR-IC	LDO, 1.3V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XD	-	XC6221D141GR	LVR-IC	LDO, 1.4V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XE	-	XC6221D151GR	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XF	-	XC6221D161GR	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XH	-	XC6221D171GR	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XK	-	XC6221D181GR	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XL	-	XC6221D191GR	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XM	-	XC6221D201GR	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XN	-	XC6221D211GR	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XP	-	XC6221D221GR	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XR	-	XC6221D231GR	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XS	-	XC6221D241GR	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XT	-	XC6221D251GR	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XU	-	XC6221D261GR	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XV	-	XC6221D271GR	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XX	-	XC6221D281GR	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XY	-	XC6221D291GR	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0XZ	-	XC6221D301GR	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
0Y	-	XC6221A48B7R	LVR-IC	LDO, 4.85V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0Y	-	XC6221C3617R	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0Y	-	XC6223A3819R-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
0Y	-	XC6229D2611R-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
0Z	-	XC6221A49B7R	LVR-IC	LDO, 4.95V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
0Z	-	XC6221C3717R	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
0Z	-	XC6223A3919R-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
10	-	RP110L171B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
10	-	XC6221C3817R	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
10	-	XC6224A08B7R	LVR-IC	LDO, 0.85V±20mV, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
10	-	XC6229D26B1R-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
10	-	XC6420AB107R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.85V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
10	-	XC6420AB10DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.85V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
101	-	XC6415AA017R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/2.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
101	-	XC6415AA01ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/2.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
102	-	XC6415AA027R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/2.90V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
102	-	XC6415AA02ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/2.90V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
103	-	XC6415AA037R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/1.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
103	-	XC6415AA03ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/1.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
104	-	XC6415AA047R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/2.70V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
104	-	XC6415AA04ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/2.70V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
105	-	XC6415AA057R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.85/2.85V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
105	-	XC6415AA05ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.85/2.85V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
106	-	XC6415AA067R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/3.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
106	-	XC6415AA06ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/3.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
107	-	XC6415AA077R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/3.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
107	-	XC6415AA07ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/3.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
108	-	XC6415AA087R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/1.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
108	-	XC6415AA08ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/1.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
109	-	XC6415AA097R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/1.20V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
109	-	XC6415AA09ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/1.20V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
10A08	-	XC6210A082DR	LVR-IC	LDO, 0.8V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A09	-	XC6210A092DR	LVR-IC	LDO, 0.9V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A0L	-	XC6210A08ADR	LVR-IC	LDO, 0.85V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A0M	-	XC6210A09ADR	LVR-IC	LDO, 0.95V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A10	-	XC6210A102DR	LVR-IC	LDO, 1.0V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A11	-	XC6210A112DR	LVR-IC	LDO, 1.1V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A12	-	XC6210A122DR	LVR-IC	LDO, 1.2V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A13	-	XC6210A132DR	LVR-IC	LDO, 1.3V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A14	-	XC6210A142DR	LVR-IC	LDO, 1.4V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A15	-	LN6210A152D	LVR-IC	LDO, 1.5V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A15	-	XC6210A152DR	LVR-IC	LDO, 1.5V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A16	-	LN6210A162D	LVR-IC	LDO, 1.6V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A16	-	XC6210A162DR	LVR-IC	LDO, 1.6V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A17	-	LN6210A172D	LVR-IC	LDO, 1.7V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A17	-	XC6210A172DR	LVR-IC	LDO, 1.7V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A18	-	LN6210A182D	LVR-IC	LDO, 1.8V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
10A18	-	XC6210A182DR	LVR-IC	LDO, 1.8V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A19	-	LN6210A192D	LVR-IC	LDO, 1.9V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A19	-	XC6210A192DR	LVR-IC	LDO, 1.9V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A1B	-	XC6210A11ADR	LVR-IC	LDO, 1.15V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A1C	-	XC6210A12ADR	LVR-IC	LDO, 1.25V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A1D	-	XC6210A13ADR	LVR-IC	LDO, 1.35V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A1E	-	XC6210A14ADR	LVR-IC	LDO, 1.45V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A1F	-	LN6210A15AD	LVR-IC	LDO, 1.55V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A1F	-	XC6210A15ADR	LVR-IC	LDO, 1.55V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A1H	-	LN6210A16AD	LVR-IC	LDO, 1.65V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A1H	-	XC6210A16ADR	LVR-IC	LDO, 1.65V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A1K	-	LN6210A17AD	LVR-IC	LDO, 1.75V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A1K	-	XC6210A17ADR	LVR-IC	LDO, 1.75V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A1L	-	LN6210A18AD	LVR-IC	LDO, 1.85V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A1L	-	XC6210A18ADR	LVR-IC	LDO, 1.85V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A1M	-	LN6210A19AD	LVR-IC	LDO, 1.95V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A1M	-	XC6210A19ADR	LVR-IC	LDO, 1.95V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A20	-	LN6210A202D	LVR-IC	LDO, 2.0V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A20	-	XC6210A202DR	LVR-IC	LDO, 2.0V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A21	-	LN6210A212D	LVR-IC	LDO, 2.1V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A21	-	XC6210A212DR	LVR-IC	LDO, 2.1V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A22	-	LN6210A222D	LVR-IC	LDO, 2.2V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A22	-	XC6210A222DR	LVR-IC	LDO, 2.2V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A23	-	LN6210A232D	LVR-IC	LDO, 2.3V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A23	-	XC6210A232DR	LVR-IC	LDO, 2.3V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A24	-	LN6210A242D	LVR-IC	LDO, 2.4V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A24	-	XC6210A242DR	LVR-IC	LDO, 2.4V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A25	-	LN6210A252D	LVR-IC	LDO, 2.5V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A25	-	XC6210A252DR	LVR-IC	LDO, 2.5V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A26	-	LN6210A262D	LVR-IC	LDO, 2.6V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A26	-	XC6210A262DR	LVR-IC	LDO, 2.6V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A27	-	LN6210A272D	LVR-IC	LDO, 2.7V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A27	-	XC6210A272DR	LVR-IC	LDO, 2.7V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A28	-	LN6210A282D	LVR-IC	LDO, 2.8V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A28	-	XC6210A282DR	LVR-IC	LDO, 2.8V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A29	-	LN6210A292D	LVR-IC	LDO, 2.9V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A29	-	XC6210A292DR	LVR-IC	LDO, 2.9V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A2A	-	LN6210A20AD	LVR-IC	LDO, 2.05V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A2A	-	XC6210A20ADR	LVR-IC	LDO, 2.05V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A2B	-	LN6210A21AD	LVR-IC	LDO, 2.15V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A2B	-	XC6210A21ADR	LVR-IC	LDO, 2.15V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A2C	-	LN6210A22AD	LVR-IC	LDO, 2.25V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A2C	-	XC6210A22ADR	LVR-IC	LDO, 2.25V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A2D	-	LN6210A23AD	LVR-IC	LDO, 2.35V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A2D	-	XC6210A23ADR	LVR-IC	LDO, 2.35V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A2E	-	LN6210A24AD	LVR-IC	LDO, 2.45V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A2E	-	XC6210A24ADR	LVR-IC	LDO, 2.45V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A2F	-	LN6210A25AD	LVR-IC	LDO, 2.55V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A2F	-	XC6210A25ADR	LVR-IC	LDO, 2.55V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A2H	-	LN6210A26AD	LVR-IC	LDO, 2.65V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A2H	-	XC6210A26ADR	LVR-IC	LDO, 2.65V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A2K	-	LN6210A27AD	LVR-IC	LDO, 2.75V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A2K	-	XC6210A27ADR	LVR-IC	LDO, 2.75V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A2L	-	LN6210A28AD	LVR-IC	LDO, 2.85V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A2L	-	XC6210A28ADR	LVR-IC	LDO, 2.85V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A2M	-	LN6210A29AD	LVR-IC	LDO, 2.95V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A2M	-	XC6210A29ADR	LVR-IC	LDO, 2.95V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A30	-	LN6210A302D	LVR-IC	LDO, 3.0V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A30	-	XC6210A302DR	LVR-IC	LDO, 3.0V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A31	-	LN6210A312D	LVR-IC	LDO, 3.1V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A31	-	XC6210A312DR	LVR-IC	LDO, 3.1V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A32	-	LN6210A322D	LVR-IC	LDO, 3.2V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A32	-	XC6210A322DR	LVR-IC	LDO, 3.2V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A33	-	LN6210A332D	LVR-IC	LDO, 3.3V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A33	-	XC6210A332DR	LVR-IC	LDO, 3.3V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A34	-	LN6210A342D	LVR-IC	LDO, 3.4V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A34	-	XC6210A342DR	LVR-IC	LDO, 3.4V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A35	-	LN6210A352D	LVR-IC	LDO, 3.5V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A35	-	XC6210A352DR	LVR-IC	LDO, 3.5V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A36	-	LN6210A362D	LVR-IC	LDO, 3.6V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
10A36	-	XC6210A362DR	LVR-IC	LDO, 3.6V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A37	-	LN6210A372D	LVR-IC	LDO, 3.7V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A37	-	XC6210A372DR	LVR-IC	LDO, 3.7V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A38	-	LN6210A382D	LVR-IC	LDO, 3.8V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A38	-	XC6210A382DR	LVR-IC	LDO, 3.8V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A39	-	LN6210A392D	LVR-IC	LDO, 3.9V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A39	-	XC6210A392DR	LVR-IC	LDO, 3.9V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A3A	-	LN6210A30AD	LVR-IC	LDO, 3.05V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A3A	-	XC6210A30ADR	LVR-IC	LDO, 3.05V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A3B	-	LN6210A31AD	LVR-IC	LDO, 3.15V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A3B	-	XC6210A31ADR	LVR-IC	LDO, 3.15V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A3C	-	LN6210A32AD	LVR-IC	LDO, 3.25V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A3C	-	XC6210A32ADR	LVR-IC	LDO, 3.25V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A3D	-	LN6210A33AD	LVR-IC	LDO, 3.35V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A3D	-	XC6210A33ADR	LVR-IC	LDO, 3.35V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A3E	-	LN6210A34AD	LVR-IC	LDO, 3.45V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A3E	-	XC6210A34ADR	LVR-IC	LDO, 3.45V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A3F	-	LN6210A35AD	LVR-IC	LDO, 3.55V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A3F	-	XC6210A35ADR	LVR-IC	LDO, 3.55V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A3H	-	LN6210A36AD	LVR-IC	LDO, 3.65V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A3H	-	XC6210A36ADR	LVR-IC	LDO, 3.65V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A3K	-	LN6210A37AD	LVR-IC	LDO, 3.75V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A3K	-	XC6210A37ADR	LVR-IC	LDO, 3.75V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A3L	-	LN6210A38AD	LVR-IC	LDO, 3.85V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A3L	-	XC6210A38ADR	LVR-IC	LDO, 3.85V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A3M	-	LN6210A39AD	LVR-IC	LDO, 3.95V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A3M	-	XC6210A39ADR	LVR-IC	LDO, 3.95V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A40	-	LN6210A402D	LVR-IC	LDO, 4.0V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A40	-	XC6210A402DR	LVR-IC	LDO, 4.0V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A41	-	LN6210A412D	LVR-IC	LDO, 4.1V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A41	-	XC6210A412DR	LVR-IC	LDO, 4.1V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A42	-	LN6210A422D	LVR-IC	LDO, 4.2V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A42	-	XC6210A422DR	LVR-IC	LDO, 4.2V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A43	-	LN6210A432D	LVR-IC	LDO, 4.3V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A43	-	XC6210A432DR	LVR-IC	LDO, 4.3V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A44	-	LN6210A442D	LVR-IC	LDO, 4.4V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A44	-	XC6210A442DR	LVR-IC	LDO, 4.4V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A45	-	LN6210A452D	LVR-IC	LDO, 4.5V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A45	-	XC6210A452DR	LVR-IC	LDO, 4.5V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A46	-	LN6210A462D	LVR-IC	LDO, 4.6V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A46	-	XC6210A462DR	LVR-IC	LDO, 4.6V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A47	-	LN6210A472D	LVR-IC	LDO, 4.7V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A47	-	XC6210A472DR	LVR-IC	LDO, 4.7V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A48	-	LN6210A482D	LVR-IC	LDO, 4.8V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A48	-	XC6210A482DR	LVR-IC	LDO, 4.8V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A49	-	LN6210A492D	LVR-IC	LDO, 4.9V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A49	-	XC6210A492DR	LVR-IC	LDO, 4.9V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A4A	-	LN6210A40AD	LVR-IC	LDO, 4.05V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A4A	-	XC6210A40ADR	LVR-IC	LDO, 4.05V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A4B	-	LN6210A41AD	LVR-IC	LDO, 4.15V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A4B	-	XC6210A41ADR	LVR-IC	LDO, 4.15V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A4C	-	LN6210A42AD	LVR-IC	LDO, 4.25V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A4C	-	XC6210A42ADR	LVR-IC	LDO, 4.25V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A4D	-	LN6210A43AD	LVR-IC	LDO, 4.35V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A4D	-	XC6210A43ADR	LVR-IC	LDO, 4.35V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A4E	-	LN6210A44AD	LVR-IC	LDO, 4.45V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A4E	-	XC6210A44ADR	LVR-IC	LDO, 4.45V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A4F	-	LN6210A45AD	LVR-IC	LDO, 4.55V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A4F	-	XC6210A45ADR	LVR-IC	LDO, 4.55V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A4H	-	LN6210A46AD	LVR-IC	LDO, 4.65V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A4H	-	XC6210A46ADR	LVR-IC	LDO, 4.65V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A4K	-	LN6210A47AD	LVR-IC	LDO, 4.75V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A4K	-	XC6210A47ADR	LVR-IC	LDO, 4.75V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A4L	-	LN6210A48AD	LVR-IC	LDO, 4.85V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A4L	-	XC6210A48ADR	LVR-IC	LDO, 4.85V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A4M	-	LN6210A49AD	LVR-IC	LDO, 4.95V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A4M	-	XC6210A49ADR	LVR-IC	LDO, 4.95V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10A50	-	LN6210A502D	LVR-IC	LDO, 5.0V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9fa	Nln
10A50	-	XC6210A502DR	LVR-IC	LDO, 5.0V±2%, 700mA, +CE, PDR	USP-6B	49hr	VR4	9b	Tor
10B08	-	XC6210B082DR	LVR-IC	LDO, 0.8V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
10B09	-	XC6210B092DR	LVR-IC	LDO, 0.9V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B0L	-	XC6210B08ADR	LVR-IC	LDO, 0.85V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B0M	-	XC6210B09ADR	LVR-IC	LDO, 0.95V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B10	-	XC6210B102DR	LVR-IC	LDO, 1.0V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B11	-	XC6210B112DR	LVR-IC	LDO, 1.1V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B12	-	XC6210B122DR	LVR-IC	LDO, 1.2V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B13	-	XC6210B132DR	LVR-IC	LDO, 1.3V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B14	-	XC6210B142DR	LVR-IC	LDO, 1.4V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B15	-	LN6210B152D	LVR-IC	LDO, 1.5V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B15	-	XC6210B152DR	LVR-IC	LDO, 1.5V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B16	-	LN6210B162D	LVR-IC	LDO, 1.6V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B16	-	XC6210B162DR	LVR-IC	LDO, 1.6V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B17	-	LN6210B172D	LVR-IC	LDO, 1.7V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B17	-	XC6210B172DR	LVR-IC	LDO, 1.7V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B18	-	LN6210B182D	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B18	-	XC6210B182DR	LVR-IC	LDO, 1.8V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B19	-	LN6210B192D	LVR-IC	LDO, 1.9V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B19	-	XC6210B192DR	LVR-IC	LDO, 1.9V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B1A	-	XC6210B11ADR	LVR-IC	LDO, 1.15V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B1B	-	XC6210B12ADR	LVR-IC	LDO, 1.25V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B1C	-	XC6210B13ADR	LVR-IC	LDO, 1.35V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B1D	-	XC6210B14ADR	LVR-IC	LDO, 1.45V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B1E	-	LN6210B15AD	LVR-IC	LDO, 1.55V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B1E	-	XC6210B15ADR	LVR-IC	LDO, 1.55V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B1F	-	LN6210B16AD	LVR-IC	LDO, 1.65V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B1F	-	XC6210B16ADR	LVR-IC	LDO, 1.65V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B1H	-	LN6210B17AD	LVR-IC	LDO, 1.75V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B1H	-	XC6210B17ADR	LVR-IC	LDO, 1.75V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B1L	-	LN6210B18AD	LVR-IC	LDO, 1.85V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B1L	-	XC6210B18ADR	LVR-IC	LDO, 1.85V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B1M	-	LN6210B19AD	LVR-IC	LDO, 1.95V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B1M	-	XC6210B19ADR	LVR-IC	LDO, 1.95V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B20	-	LN6210B202D	LVR-IC	LDO, 2.0V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B20	-	XC6210B202DR	LVR-IC	LDO, 2.0V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B21	-	LN6210B212D	LVR-IC	LDO, 2.1V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B21	-	XC6210B212DR	LVR-IC	LDO, 2.1V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B22	-	LN6210B222D	LVR-IC	LDO, 2.2V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B22	-	XC6210B222DR	LVR-IC	LDO, 2.2V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B23	-	LN6210B232D	LVR-IC	LDO, 2.3V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B23	-	XC6210B232DR	LVR-IC	LDO, 2.3V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B24	-	LN6210B242D	LVR-IC	LDO, 2.4V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B24	-	XC6210B242DR	LVR-IC	LDO, 2.4V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B25	-	LN6210B252D	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B25	-	XC6210B252DR	LVR-IC	LDO, 2.5V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B26	-	LN6210B262D	LVR-IC	LDO, 2.6V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B26	-	XC6210B262DR	LVR-IC	LDO, 2.6V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B27	-	LN6210B272D	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B27	-	XC6210B272DR	LVR-IC	LDO, 2.7V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B28	-	LN6210B282D	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B28	-	XC6210B282DR	LVR-IC	LDO, 2.8V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B29	-	LN6210B292D	LVR-IC	LDO, 2.9V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B29	-	XC6210B292DR	LVR-IC	LDO, 2.9V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B2A	-	LN6210B20AD	LVR-IC	LDO, 2.05V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B2A	-	XC6210B20ADR	LVR-IC	LDO, 2.05V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B2B	-	LN6210B21AD	LVR-IC	LDO, 2.15V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B2B	-	XC6210B21ADR	LVR-IC	LDO, 2.15V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B2C	-	LN6210B22AD	LVR-IC	LDO, 2.25V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B2C	-	XC6210B22ADR	LVR-IC	LDO, 2.25V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B2D	-	LN6210B23AD	LVR-IC	LDO, 2.35V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B2D	-	XC6210B23ADR	LVR-IC	LDO, 2.35V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B2E	-	LN6210B24AD	LVR-IC	LDO, 2.45V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B2E	-	XC6210B24ADR	LVR-IC	LDO, 2.45V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B2F	-	LN6210B25AD	LVR-IC	LDO, 2.55V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B2F	-	XC6210B25ADR	LVR-IC	LDO, 2.55V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B2H	-	LN6210B26AD	LVR-IC	LDO, 2.65V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B2H	-	XC6210B26ADR	LVR-IC	LDO, 2.65V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B2K	-	LN6210B27AD	LVR-IC	LDO, 2.75V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B2K	-	XC6210B27ADR	LVR-IC	LDO, 2.75V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B2L	-	LN6210B28AD	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B2L	-	XC6210B28ADR	LVR-IC	LDO, 2.85V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
10B2M	-	LN6210B29AD	LVR-IC	LDO, 2.95V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B2M	-	XC6210B29ADR	LVR-IC	LDO, 2.95V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B30	-	LN6210B302D	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B30	-	XC6210B302DR	LVR-IC	LDO, 3.0V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B31	-	LN6210B312D	LVR-IC	LDO, 3.1V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B31	-	XC6210B312DR	LVR-IC	LDO, 3.1V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B32	-	LN6210B322D	LVR-IC	LDO, 3.2V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B32	-	XC6210B322DR	LVR-IC	LDO, 3.2V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B33	-	LN6210B332D	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B33	-	XC6210B332DR	LVR-IC	LDO, 3.3V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B34	-	LN6210B342D	LVR-IC	LDO, 3.4V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B34	-	XC6210B342DR	LVR-IC	LDO, 3.4V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B35	-	LN6210B352D	LVR-IC	LDO, 3.5V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B35	-	XC6210B352DR	LVR-IC	LDO, 3.5V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B36	-	LN6210B362D	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B36	-	XC6210B362DR	LVR-IC	LDO, 3.6V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B37	-	LN6210B372D	LVR-IC	LDO, 3.7V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B37	-	XC6210B372DR	LVR-IC	LDO, 3.7V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B38	-	LN6210B382D	LVR-IC	LDO, 3.8V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B38	-	XC6210B382DR	LVR-IC	LDO, 3.8V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B39	-	LN6210B392D	LVR-IC	LDO, 3.9V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B39	-	XC6210B392DR	LVR-IC	LDO, 3.9V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B3A	-	LN6210B30AD	LVR-IC	LDO, 3.05V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B3A	-	XC6210B30ADR	LVR-IC	LDO, 3.05V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B3B	-	LN6210B31AD	LVR-IC	LDO, 3.15V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B3B	-	XC6210B31ADR	LVR-IC	LDO, 3.15V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B3C	-	LN6210B32AD	LVR-IC	LDO, 3.25V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B3C	-	XC6210B32ADR	LVR-IC	LDO, 3.25V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B3D	-	LN6210B33AD	LVR-IC	LDO, 3.35V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B3D	-	XC6210B33ADR	LVR-IC	LDO, 3.35V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B3E	-	LN6210B34AD	LVR-IC	LDO, 3.45V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B3E	-	XC6210B34ADR	LVR-IC	LDO, 3.45V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B3F	-	LN6210B35AD	LVR-IC	LDO, 3.55V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B3F	-	XC6210B35ADR	LVR-IC	LDO, 3.55V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B3H	-	LN6210B36AD	LVR-IC	LDO, 3.65V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B3H	-	XC6210B36ADR	LVR-IC	LDO, 3.65V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B3K	-	LN6210B37AD	LVR-IC	LDO, 3.75V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B3K	-	XC6210B37ADR	LVR-IC	LDO, 3.75V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B3L	-	LN6210B38AD	LVR-IC	LDO, 3.85V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B3L	-	XC6210B38ADR	LVR-IC	LDO, 3.85V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B3M	-	LN6210B39AD	LVR-IC	LDO, 3.95V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B3M	-	XC6210B39ADR	LVR-IC	LDO, 3.95V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B40	-	LN6210B402D	LVR-IC	LDO, 4.0V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B40	-	XC6210B402DR	LVR-IC	LDO, 4.0V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B41	-	LN6210B412D	LVR-IC	LDO, 4.1V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B41	-	XC6210B412DR	LVR-IC	LDO, 4.1V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B42	-	LN6210B422D	LVR-IC	LDO, 4.2V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B42	-	XC6210B422DR	LVR-IC	LDO, 4.2V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B43	-	LN6210B432D	LVR-IC	LDO, 4.3V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B43	-	XC6210B432DR	LVR-IC	LDO, 4.3V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B44	-	LN6210B442D	LVR-IC	LDO, 4.4V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B44	-	XC6210B442DR	LVR-IC	LDO, 4.4V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B45	-	LN6210B452D	LVR-IC	LDO, 4.5V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B45	-	XC6210B452DR	LVR-IC	LDO, 4.5V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B46	-	LN6210B462D	LVR-IC	LDO, 4.6V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B46	-	XC6210B462DR	LVR-IC	LDO, 4.6V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B47	-	LN6210B472D	LVR-IC	LDO, 4.7V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B47	-	XC6210B472DR	LVR-IC	LDO, 4.7V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B48	-	LN6210B482D	LVR-IC	LDO, 4.8V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B48	-	XC6210B482DR	LVR-IC	LDO, 4.8V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B49	-	LN6210B492D	LVR-IC	LDO, 4.9V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B49	-	XC6210B492DR	LVR-IC	LDO, 4.9V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B4A	-	LN6210B40AD	LVR-IC	LDO, 4.05V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B4A	-	XC6210B40ADR	LVR-IC	LDO, 4.05V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B4B	-	LN6210B41AD	LVR-IC	LDO, 4.15V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B4B	-	XC6210B41ADR	LVR-IC	LDO, 4.15V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B4C	-	LN6210B42AD	LVR-IC	LDO, 4.25V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B4C	-	XC6210B42ADR	LVR-IC	LDO, 4.25V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B4D	-	LN6210B43AD	LVR-IC	LDO, 4.35V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B4D	-	XC6210B43ADR	LVR-IC	LDO, 4.35V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
10B4E	-	LN6210B44AD	LVR-IC	LDO, 4.45V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B4E	-	XC6210B44ADR	LVR-IC	LDO, 4.45V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B4F	-	LN6210B45AD	LVR-IC	LDO, 4.55V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B4F	-	XC6210B45ADR	LVR-IC	LDO, 4.55V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B4H	-	LN6210B46AD	LVR-IC	LDO, 4.65V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B4H	-	XC6210B46ADR	LVR-IC	LDO, 4.65V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B4K	-	LN6210B47AD	LVR-IC	LDO, 4.75V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B4K	-	XC6210B47ADR	LVR-IC	LDO, 4.75V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B4L	-	LN6210B48AD	LVR-IC	LDO, 4.85V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B4L	-	XC6210B48ADR	LVR-IC	LDO, 4.85V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B4M	-	LN6210B49AD	LVR-IC	LDO, 4.95V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B4M	-	XC6210B49ADR	LVR-IC	LDO, 4.95V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10B50	-	LN6210B502D	LVR-IC	LDO, 5.0V±2%, 700mA, +CE	USP-6B	49hr	VR4	9fa	Nln
10B50	-	XC6210B502DR	LVR-IC	LDO, 5.0V±2%, 700mA, +CE	USP-6B	49hr	VR4	9b	Tor
10C08	-	XC6210C082DR	LVR-IC	LDO, 0.8V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C09	-	XC6210C092DR	LVR-IC	LDO, 0.9V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C0L	-	XC6210C08ADR	LVR-IC	LDO, 0.85V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C0M	-	XC6210C09ADR	LVR-IC	LDO, 0.95V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C10	-	XC6210C102DR	LVR-IC	LDO, 1.0V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C11	-	XC6210C112DR	LVR-IC	LDO, 1.1V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C12	-	XC6210C122DR	LVR-IC	LDO, 1.2V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C13	-	XC6210C132DR	LVR-IC	LDO, 1.3V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C14	-	XC6210C142DR	LVR-IC	LDO, 1.4V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C15	-	LN6210C152D	LVR-IC	LDO, 1.5V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C15	-	XC6210C152DR	LVR-IC	LDO, 1.5V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C16	-	LN6210C162D	LVR-IC	LDO, 1.6V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C16	-	XC6210C162DR	LVR-IC	LDO, 1.6V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C17	-	LN6210C172D	LVR-IC	LDO, 1.7V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C17	-	XC6210C172DR	LVR-IC	LDO, 1.7V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C18	-	LN6210C182D	LVR-IC	LDO, 1.8V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C18	-	XC6210C182DR	LVR-IC	LDO, 1.8V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C19	-	LN6210C192D	LVR-IC	LDO, 1.9V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C19	-	XC6210C192DR	LVR-IC	LDO, 1.9V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C1A	-	XC6210C11ADR	LVR-IC	LDO, 1.15V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C1B	-	XC6210C12ADR	LVR-IC	LDO, 1.25V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C1C	-	XC6210C13ADR	LVR-IC	LDO, 1.35V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C1D	-	XC6210C14ADR	LVR-IC	LDO, 1.45V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C1E	-	LN6210C15AD	LVR-IC	LDO, 1.55V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C1E	-	XC6210C15ADR	LVR-IC	LDO, 1.55V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C1F	-	LN6210C16AD	LVR-IC	LDO, 1.65V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C1F	-	XC6210C16ADR	LVR-IC	LDO, 1.65V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C1H	-	LN6210C17AD	LVR-IC	LDO, 1.75V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C1H	-	XC6210C17ADR	LVR-IC	LDO, 1.75V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C1K	-	LN6210C18AD	LVR-IC	LDO, 1.85V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C1K	-	XC6210C18ADR	LVR-IC	LDO, 1.85V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C1L	-	LN6210C19AD	LVR-IC	LDO, 1.95V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C1L	-	XC6210C19ADR	LVR-IC	LDO, 1.95V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C20	-	LN6210C202D	LVR-IC	LDO, 2.0V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C20	-	XC6210C202DR	LVR-IC	LDO, 2.0V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C21	-	LN6210C212D	LVR-IC	LDO, 2.1V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C21	-	XC6210C212DR	LVR-IC	LDO, 2.1V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C22	-	LN6210C222D	LVR-IC	LDO, 2.2V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C22	-	XC6210C222DR	LVR-IC	LDO, 2.2V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C23	-	LN6210C232D	LVR-IC	LDO, 2.3V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C23	-	XC6210C232DR	LVR-IC	LDO, 2.3V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C24	-	LN6210C242D	LVR-IC	LDO, 2.4V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C24	-	XC6210C242DR	LVR-IC	LDO, 2.4V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C25	-	LN6210C252D	LVR-IC	LDO, 2.5V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C25	-	XC6210C252DR	LVR-IC	LDO, 2.5V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C26	-	LN6210C262D	LVR-IC	LDO, 2.6V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C26	-	XC6210C262DR	LVR-IC	LDO, 2.6V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C27	-	LN6210C272D	LVR-IC	LDO, 2.7V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C27	-	XC6210C272DR	LVR-IC	LDO, 2.7V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C28	-	LN6210C282D	LVR-IC	LDO, 2.8V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C28	-	XC6210C282DR	LVR-IC	LDO, 2.8V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C29	-	LN6210C292D	LVR-IC	LDO, 2.9V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C29	-	XC6210C292DR	LVR-IC	LDO, 2.9V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C2A	-	LN6210C20AD	LVR-IC	LDO, 2.05V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C2A	-	XC6210C20ADR	LVR-IC	LDO, 2.05V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C2B	-	LN6210C21AD	LVR-IC	LDO, 2.15V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
10C2B	-	XC6210C21ADR	LVR-IC	LDO, 2.15V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C2C	-	LN6210C22AD	LVR-IC	LDO, 2.25V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C2C	-	XC6210C22ADR	LVR-IC	LDO, 2.25V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C2D	-	LN6210C23AD	LVR-IC	LDO, 2.35V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C2D	-	XC6210C23ADR	LVR-IC	LDO, 2.35V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C2E	-	LN6210C24AD	LVR-IC	LDO, 2.45V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C2E	-	XC6210C24ADR	LVR-IC	LDO, 2.45V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C2F	-	LN6210C25AD	LVR-IC	LDO, 2.55V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C2F	-	XC6210C25ADR	LVR-IC	LDO, 2.55V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C2H	-	LN6210C26AD	LVR-IC	LDO, 2.65V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C2H	-	XC6210C26ADR	LVR-IC	LDO, 2.65V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C2K	-	LN6210C27AD	LVR-IC	LDO, 2.75V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C2K	-	XC6210C27ADR	LVR-IC	LDO, 2.75V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C2L	-	LN6210C28AD	LVR-IC	LDO, 2.85V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C2L	-	XC6210C28ADR	LVR-IC	LDO, 2.85V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C2M	-	LN6210C29AD	LVR-IC	LDO, 2.95V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C2M	-	XC6210C29ADR	LVR-IC	LDO, 2.95V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C30	-	LN6210C302D	LVR-IC	LDO, 3.0V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C30	-	XC6210C302DR	LVR-IC	LDO, 3.0V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C31	-	LN6210C312D	LVR-IC	LDO, 3.1V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C31	-	XC6210C312DR	LVR-IC	LDO, 3.1V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C32	-	LN6210C322D	LVR-IC	LDO, 3.2V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C32	-	XC6210C322DR	LVR-IC	LDO, 3.2V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C33	-	LN6210C332D	LVR-IC	LDO, 3.3V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C33	-	XC6210C332DR	LVR-IC	LDO, 3.3V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C34	-	LN6210C342D	LVR-IC	LDO, 3.4V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C34	-	XC6210C342DR	LVR-IC	LDO, 3.4V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C35	-	LN6210C352D	LVR-IC	LDO, 3.5V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C35	-	XC6210C352DR	LVR-IC	LDO, 3.5V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C36	-	LN6210C362D	LVR-IC	LDO, 3.6V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C36	-	XC6210C362DR	LVR-IC	LDO, 3.6V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C37	-	LN6210C372D	LVR-IC	LDO, 3.7V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C37	-	XC6210C372DR	LVR-IC	LDO, 3.7V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C38	-	LN6210C382D	LVR-IC	LDO, 3.8V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C38	-	XC6210C382DR	LVR-IC	LDO, 3.8V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C39	-	LN6210C392D	LVR-IC	LDO, 3.9V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C39	-	XC6210C392DR	LVR-IC	LDO, 3.9V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C3A	-	LN6210C30AD	LVR-IC	LDO, 3.05V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C3A	-	XC6210C30ADR	LVR-IC	LDO, 3.05V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C3B	-	LN6210C31AD	LVR-IC	LDO, 3.15V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C3B	-	XC6210C31ADR	LVR-IC	LDO, 3.15V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C3C	-	LN6210C32AD	LVR-IC	LDO, 3.25V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C3C	-	XC6210C32ADR	LVR-IC	LDO, 3.25V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C3D	-	LN6210C33AD	LVR-IC	LDO, 3.35V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C3D	-	XC6210C33ADR	LVR-IC	LDO, 3.35V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C3E	-	LN6210C34AD	LVR-IC	LDO, 3.45V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C3E	-	XC6210C34ADR	LVR-IC	LDO, 3.45V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C3F	-	LN6210C35AD	LVR-IC	LDO, 3.55V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C3F	-	XC6210C35ADR	LVR-IC	LDO, 3.55V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C3H	-	LN6210C36AD	LVR-IC	LDO, 3.65V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C3H	-	XC6210C36ADR	LVR-IC	LDO, 3.65V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C3K	-	LN6210C37AD	LVR-IC	LDO, 3.75V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C3K	-	XC6210C37ADR	LVR-IC	LDO, 3.75V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C3L	-	LN6210C38AD	LVR-IC	LDO, 3.85V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C3L	-	XC6210C38ADR	LVR-IC	LDO, 3.85V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C3M	-	LN6210C39AD	LVR-IC	LDO, 3.95V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C3M	-	XC6210C39ADR	LVR-IC	LDO, 3.95V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C40	-	LN6210C402D	LVR-IC	LDO, 4.0V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C40	-	XC6210C402DR	LVR-IC	LDO, 4.0V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C41	-	LN6210C412D	LVR-IC	LDO, 4.1V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C41	-	XC6210C412DR	LVR-IC	LDO, 4.1V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C42	-	LN6210C422D	LVR-IC	LDO, 4.2V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C42	-	XC6210C422DR	LVR-IC	LDO, 4.2V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C43	-	LN6210C432D	LVR-IC	LDO, 4.3V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C43	-	XC6210C432DR	LVR-IC	LDO, 4.3V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C44	-	LN6210C442D	LVR-IC	LDO, 4.4V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C44	-	XC6210C442DR	LVR-IC	LDO, 4.4V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C45	-	LN6210C452D	LVR-IC	LDO, 4.5V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C45	-	XC6210C452DR	LVR-IC	LDO, 4.5V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C46	-	LN6210C462D	LVR-IC	LDO, 4.6V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
10C46	-	XC6210C462DR	LVR-IC	LDO, 4.6V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C47	-	LN6210C472D	LVR-IC	LDO, 4.7V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C47	-	XC6210C472DR	LVR-IC	LDO, 4.7V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C48	-	LN6210C482D	LVR-IC	LDO, 4.8V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C48	-	XC6210C482DR	LVR-IC	LDO, 4.8V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C49	-	LN6210C492D	LVR-IC	LDO, 4.9V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C49	-	XC6210C492DR	LVR-IC	LDO, 4.9V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C4A	-	LN6210C40AD	LVR-IC	LDO, 4.05V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C4A	-	XC6210C40ADR	LVR-IC	LDO, 4.05V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C4B	-	LN6210C41AD	LVR-IC	LDO, 4.15V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C4B	-	XC6210C41ADR	LVR-IC	LDO, 4.15V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C4C	-	LN6210C42AD	LVR-IC	LDO, 4.25V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C4C	-	XC6210C42ADR	LVR-IC	LDO, 4.25V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C4D	-	LN6210C43AD	LVR-IC	LDO, 4.35V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C4D	-	XC6210C43ADR	LVR-IC	LDO, 4.35V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C4E	-	LN6210C44AD	LVR-IC	LDO, 4.45V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C4E	-	XC6210C44ADR	LVR-IC	LDO, 4.45V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C4F	-	LN6210C45AD	LVR-IC	LDO, 4.55V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C4F	-	XC6210C45ADR	LVR-IC	LDO, 4.55V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C4H	-	LN6210C46AD	LVR-IC	LDO, 4.65V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C4H	-	XC6210C46ADR	LVR-IC	LDO, 4.65V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C4K	-	LN6210C47AD	LVR-IC	LDO, 4.75V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C4K	-	XC6210C47ADR	LVR-IC	LDO, 4.75V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C4L	-	LN6210C48AD	LVR-IC	LDO, 4.85V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C4L	-	XC6210C48ADR	LVR-IC	LDO, 4.85V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C4M	-	LN6210C49AD	LVR-IC	LDO, 4.95V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C4M	-	XC6210C49ADR	LVR-IC	LDO, 4.95V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10C50	-	LN6210C502D	LVR-IC	LDO, 5.0V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9fa	Nln
10C50	-	XC6210C502DR	LVR-IC	LDO, 5.0V±2%, 700mA, -CE, PUR	USP-6B	49hr	VR4	9b	Tor
10D08	-	XC6210D082DR	LVR-IC	LDO, 0.8V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D09	-	XC6210D092DR	LVR-IC	LDO, 0.9V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D0L	-	XC6210D08ADR	LVR-IC	LDO, 0.85V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D0M	-	XC6210D09ADR	LVR-IC	LDO, 0.95V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D10	-	XC6210D102DR	LVR-IC	LDO, 1.0V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D11	-	XC6210D112DR	LVR-IC	LDO, 1.1V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D12	-	XC6210D122DR	LVR-IC	LDO, 1.2V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D13	-	XC6210D132DR	LVR-IC	LDO, 1.3V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D14	-	XC6210D142DR	LVR-IC	LDO, 1.4V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D15	-	LN6210D152D	LVR-IC	LDO, 1.5V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D15	-	XC6210D152DR	LVR-IC	LDO, 1.5V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D16	-	LN6210D162D	LVR-IC	LDO, 1.6V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D16	-	XC6210D162DR	LVR-IC	LDO, 1.6V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D17	-	LN6210D172D	LVR-IC	LDO, 1.7V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D17	-	XC6210D172DR	LVR-IC	LDO, 1.7V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D18	-	LN6210D182D	LVR-IC	LDO, 1.8V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D18	-	XC6210D182DR	LVR-IC	LDO, 1.8V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D19	-	LN6210D192D	LVR-IC	LDO, 1.9V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D19	-	XC6210D192DR	LVR-IC	LDO, 1.9V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D1B	-	XC6210D11ADR	LVR-IC	LDO, 1.15V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D1C	-	XC6210D12ADR	LVR-IC	LDO, 1.25V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D1D	-	XC6210D13ADR	LVR-IC	LDO, 1.35V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D1E	-	XC6210D14ADR	LVR-IC	LDO, 1.45V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D1F	-	LN6210D15AD	LVR-IC	LDO, 1.55V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D1F	-	XC6210D15ADR	LVR-IC	LDO, 1.55V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D1H	-	LN6210D16AD	LVR-IC	LDO, 1.65V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D1H	-	XC6210D16ADR	LVR-IC	LDO, 1.65V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D1K	-	LN6210D17AD	LVR-IC	LDO, 1.75V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D1K	-	XC6210D17ADR	LVR-IC	LDO, 1.75V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D1L	-	LN6210D18AD	LVR-IC	LDO, 1.85V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D1L	-	XC6210D18ADR	LVR-IC	LDO, 1.85V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D1M	-	LN6210D19AD	LVR-IC	LDO, 1.95V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D1M	-	XC6210D19ADR	LVR-IC	LDO, 1.95V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D20	-	LN6210D202D	LVR-IC	LDO, 2.0V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D20	-	XC6210D202DR	LVR-IC	LDO, 2.0V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D21	-	LN6210D212D	LVR-IC	LDO, 2.1V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D21	-	XC6210D212DR	LVR-IC	LDO, 2.1V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D22	-	LN6210D222D	LVR-IC	LDO, 2.2V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D22	-	XC6210D222DR	LVR-IC	LDO, 2.2V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D23	-	LN6210D232D	LVR-IC	LDO, 2.3V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D23	-	XC6210D232DR	LVR-IC	LDO, 2.3V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
10D24	-	LN6210D242D	LVR-IC	LDO, 2.4V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D24	-	XC6210D242DR	LVR-IC	LDO, 2.4V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D25	-	LN6210D252D	LVR-IC	LDO, 2.5V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D25	-	XC6210D252DR	LVR-IC	LDO, 2.5V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D26	-	LN6210D262D	LVR-IC	LDO, 2.6V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D26	-	XC6210D262DR	LVR-IC	LDO, 2.6V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D27	-	LN6210D272D	LVR-IC	LDO, 2.7V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D27	-	XC6210D272DR	LVR-IC	LDO, 2.7V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D28	-	LN6210D282D	LVR-IC	LDO, 2.8V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D28	-	XC6210D282DR	LVR-IC	LDO, 2.8V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D29	-	LN6210D292D	LVR-IC	LDO, 2.9V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D29	-	XC6210D292DR	LVR-IC	LDO, 2.9V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D2A	-	LN6210D20AD	LVR-IC	LDO, 2.05V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D2A	-	XC6210D20ADR	LVR-IC	LDO, 2.05V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D2B	-	LN6210D21AD	LVR-IC	LDO, 2.15V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D2B	-	XC6210D21ADR	LVR-IC	LDO, 2.15V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D2C	-	LN6210D22AD	LVR-IC	LDO, 2.25V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D2C	-	XC6210D22ADR	LVR-IC	LDO, 2.25V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D2D	-	LN6210D23AD	LVR-IC	LDO, 2.35V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D2D	-	XC6210D23ADR	LVR-IC	LDO, 2.35V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D2E	-	LN6210D24AD	LVR-IC	LDO, 2.45V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D2E	-	XC6210D24ADR	LVR-IC	LDO, 2.45V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D2F	-	LN6210D25AD	LVR-IC	LDO, 2.55V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D2F	-	XC6210D25ADR	LVR-IC	LDO, 2.55V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D2H	-	LN6210D26AD	LVR-IC	LDO, 2.65V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D2H	-	XC6210D26ADR	LVR-IC	LDO, 2.65V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D2K	-	LN6210D27AD	LVR-IC	LDO, 2.75V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D2K	-	XC6210D27ADR	LVR-IC	LDO, 2.75V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D2L	-	LN6210D28AD	LVR-IC	LDO, 2.85V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D2L	-	XC6210D28ADR	LVR-IC	LDO, 2.85V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D2M	-	LN6210D29AD	LVR-IC	LDO, 2.95V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D2M	-	XC6210D29ADR	LVR-IC	LDO, 2.95V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D30	-	LN6210D302D	LVR-IC	LDO, 3.0V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D30	-	XC6210D302DR	LVR-IC	LDO, 3.0V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D31	-	LN6210D312D	LVR-IC	LDO, 3.1V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D31	-	XC6210D312DR	LVR-IC	LDO, 3.1V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D32	-	LN6210D322D	LVR-IC	LDO, 3.2V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D32	-	XC6210D322DR	LVR-IC	LDO, 3.2V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D33	-	LN6210D332D	LVR-IC	LDO, 3.3V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D33	-	XC6210D332DR	LVR-IC	LDO, 3.3V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D34	-	LN6210D342D	LVR-IC	LDO, 3.4V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D34	-	XC6210D342DR	LVR-IC	LDO, 3.4V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D35	-	LN6210D352D	LVR-IC	LDO, 3.5V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D35	-	XC6210D352DR	LVR-IC	LDO, 3.5V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D36	-	LN6210D362D	LVR-IC	LDO, 3.6V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D36	-	XC6210D362DR	LVR-IC	LDO, 3.6V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D37	-	LN6210D372D	LVR-IC	LDO, 3.7V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D37	-	XC6210D372DR	LVR-IC	LDO, 3.7V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D38	-	LN6210D382D	LVR-IC	LDO, 3.8V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D38	-	XC6210D382DR	LVR-IC	LDO, 3.8V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D39	-	LN6210D392D	LVR-IC	LDO, 3.9V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D39	-	XC6210D392DR	LVR-IC	LDO, 3.9V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D3A	-	LN6210D30AD	LVR-IC	LDO, 3.05V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D3A	-	XC6210D30ADR	LVR-IC	LDO, 3.05V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D3B	-	LN6210D31AD	LVR-IC	LDO, 3.15V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D3B	-	XC6210D31ADR	LVR-IC	LDO, 3.15V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D3C	-	LN6210D32AD	LVR-IC	LDO, 3.25V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D3C	-	XC6210D32ADR	LVR-IC	LDO, 3.25V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D3D	-	LN6210D33AD	LVR-IC	LDO, 3.35V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D3D	-	XC6210D33ADR	LVR-IC	LDO, 3.35V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D3E	-	LN6210D34AD	LVR-IC	LDO, 3.45V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D3E	-	XC6210D34ADR	LVR-IC	LDO, 3.45V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D3F	-	LN6210D35AD	LVR-IC	LDO, 3.55V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D3F	-	XC6210D35ADR	LVR-IC	LDO, 3.55V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D3H	-	LN6210D36AD	LVR-IC	LDO, 3.65V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D3H	-	XC6210D36ADR	LVR-IC	LDO, 3.65V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D3K	-	LN6210D37AD	LVR-IC	LDO, 3.75V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D3K	-	XC6210D37ADR	LVR-IC	LDO, 3.75V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D3L	-	LN6210D38AD	LVR-IC	LDO, 3.85V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D3L	-	XC6210D38ADR	LVR-IC	LDO, 3.85V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
10D3M	-	LN6210D39AD	LVR-IC	LDO, 3.95V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D3M	-	XC6210D39ADR	LVR-IC	LDO, 3.95V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D40	-	LN6210D402D	LVR-IC	LDO, 4.0V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D40	-	XC6210D402DR	LVR-IC	LDO, 4.0V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D41	-	LN6210D412D	LVR-IC	LDO, 4.1V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D41	-	XC6210D412DR	LVR-IC	LDO, 4.1V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D42	-	LN6210D422D	LVR-IC	LDO, 4.2V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D42	-	XC6210D422DR	LVR-IC	LDO, 4.2V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D43	-	LN6210D432D	LVR-IC	LDO, 4.3V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D43	-	XC6210D432DR	LVR-IC	LDO, 4.3V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D44	-	LN6210D442D	LVR-IC	LDO, 4.4V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D44	-	XC6210D442DR	LVR-IC	LDO, 4.4V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D45	-	LN6210D452D	LVR-IC	LDO, 4.5V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D45	-	XC6210D452DR	LVR-IC	LDO, 4.5V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D46	-	LN6210D462D	LVR-IC	LDO, 4.6V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D46	-	XC6210D462DR	LVR-IC	LDO, 4.6V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D47	-	LN6210D472D	LVR-IC	LDO, 4.7V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D47	-	XC6210D472DR	LVR-IC	LDO, 4.7V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D48	-	LN6210D482D	LVR-IC	LDO, 4.8V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D48	-	XC6210D482DR	LVR-IC	LDO, 4.8V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D49	-	LN6210D492D	LVR-IC	LDO, 4.9V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D49	-	XC6210D492DR	LVR-IC	LDO, 4.9V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D4A	-	LN6210D40AD	LVR-IC	LDO, 4.05V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D4A	-	XC6210D40ADR	LVR-IC	LDO, 4.05V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D4B	-	LN6210D41AD	LVR-IC	LDO, 4.15V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D4B	-	XC6210D41ADR	LVR-IC	LDO, 4.15V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D4C	-	LN6210D42AD	LVR-IC	LDO, 4.25V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D4C	-	XC6210D42ADR	LVR-IC	LDO, 4.25V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D4D	-	LN6210D43AD	LVR-IC	LDO, 4.35V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D4D	-	XC6210D43ADR	LVR-IC	LDO, 4.35V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D4E	-	LN6210D44AD	LVR-IC	LDO, 4.45V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D4E	-	XC6210D44ADR	LVR-IC	LDO, 4.45V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D4F	-	LN6210D45AD	LVR-IC	LDO, 4.55V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D4F	-	XC6210D45ADR	LVR-IC	LDO, 4.55V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D4H	-	LN6210D46AD	LVR-IC	LDO, 4.65V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D4H	-	XC6210D46ADR	LVR-IC	LDO, 4.65V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D4K	-	LN6210D47AD	LVR-IC	LDO, 4.75V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D4K	-	XC6210D47ADR	LVR-IC	LDO, 4.75V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D4L	-	LN6210D48AD	LVR-IC	LDO, 4.85V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D4L	-	XC6210D48ADR	LVR-IC	LDO, 4.85V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D4M	-	LN6210D49AD	LVR-IC	LDO, 4.95V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D4M	-	XC6210D49ADR	LVR-IC	LDO, 4.95V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
10D50	-	LN6210D502D	LVR-IC	LDO, 5.0V±2%, 700mA, -CE	USP-6B	49hr	VR4	9fa	Nln
10D50	-	XC6210D502DR	LVR-IC	LDO, 5.0V±2%, 700mA, -CE	USP-6B	49hr	VR4	9b	Tor
11	-	MAV-11BSM	MMIC	RF amplifier, 50MHz..8GHz, 9.5dB (50Ω)	LLP-X	36aa	A1	9a	Mc
11	-	RP110L181B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
11	-	XC6221C3917R	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
11	-	XC6224A09B7R	LVR-IC	LDO, 0.95V±20mV, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
11	-	XC6229D2711R-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
11	-	XC6420AB117R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/3.00V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
11	-	XC6420AB11DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/3.00V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
110	-	XC6415AA107R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.10/1.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
110	-	XC6415AA10ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.10/1.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
111	-	XC6415AA117R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.30/1.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
111	-	XC6415AA11ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.30/1.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1117-18	-	LM1117LDX-1.8	LVR-IC	LDO, 1.8V±2%, 800mA, 0..+125°	DFN-8	92cf	VR1	9m	Nsc
1117-25	-	LM1117LDX-2.5	LVR-IC	LDO, 2.5V±2%, 800mA, 0..+125°	DFN-8	92cf	VR1	9m	Nsc
1117-28	-	LM1117LDX-2.85	LVR-IC	LDO, 2.85V±2%, 800mA, 0..+125°	DFN-8	92cf	VR1	9m	Nsc
1117-33	-	LM1117LDX-3.3	LVR-IC	LDO, 3.3V±2%, 800mA, 0..+125°	DFN-8	92cf	VR1	9m	Nsc
1117-50	-	LM1117LDX-5.0	LVR-IC	LDO, 5.0V±2%, 800mA, 0..+125°	DFN-8	92cf	VR1	9m	Nsc
1117ADJ	-	LM1117LDX-ADJ	LVR-IC	LDO, Adjustable 1.25..13.8V, 0.8A, 0..+125°	DFN-8	92vrs	VR20	9a	Nsc
1117I33	-	LM1117ILDX-3.3	LVR-IC	LDO, 3.3V±2%, 800mA, -40..+125°	DFN-8	92cf	VR1	9m	Nsc
1117I50	-	LM1117ILDX-5.0	LVR-IC	LDO, 5.0V±2%, 800mA, -40..+125°	DFN-8	92cf	VR1	9m	Nsc
1117IAD	-	LM1117ILDX-ADJ	LVR-IC	LDO, Adjustable 1.25..13.8V, 0.8A, -40..+125°	DFN-8	92vrs	VR20	9a	Nsc
112	-	XC6415AA127R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/2.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
112	-	XC6415AA12ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/2.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
113	-	XC6415AA137R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/3.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
113	-	XC6415AA13ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/3.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
114	-	XC6415AA147R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/3.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
114	-	XC6415AA14ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/3.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
115	-	XC6415AA157R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/1.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
115	-	XC6415AA15ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/1.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
116	-	XC6415AA167R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/3.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
116	-	XC6415AA16ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/3.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
117	-	XC6415AA177R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/3.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
117	-	XC6415AA17ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/3.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
118	-	XC6415AA187R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.10/3.10V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
118	-	XC6415AA18ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.10/3.10V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
119	-	XC6415AA197R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/1.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
119	-	XC6415AA19ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/1.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
12	-	RP110L181B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
12	-	XC6221C4017R	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
12	-	XC6223B1219R-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
12	-	XC6224A10B7R	LVR-IC	LDO, 1.05V±20mV, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
12	-	XC6229D27B1R-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
12	-	XC6420AB127R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/3.30V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
12	-	XC6420AB12DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/3.30V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
120	-	XC6415AA207R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.30/2.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
120	-	XC6415AA20ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.30/2.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
121	-	XC6415AA217R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/2.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
121	-	XC6415AA21ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/2.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
122	-	XC6415AA227R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/3.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
122	-	XC6415AA22ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/3.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
123	-	XC6415AA237R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.85/2.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
123	-	XC6415AA23ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.85/2.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
124	-	XC6415AA247R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.85/3.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
124	-	XC6415AA24ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.85/3.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
125	-	XC6415AA257R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.60/2.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
125	-	XC6415AA25ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.60/2.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
126	-	XC6415AA267R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/1.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
126	-	XC6415AA26ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/1.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
127	-	XC6415AA277R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.00/3.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
127	-	XC6415AA27ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.00/3.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
128	-	XC6415AA287R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/1.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
128	-	XC6415AA28ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/1.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
129	-	XC6415AA297R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/1.75V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
129	-	XC6415AA29ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/1.75V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
13	-	RP110L191B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
13	-	XC6221C4117R	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
13	-	XC6223B1319R-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
13	-	XC6224A11B7R	LVR-IC	LDO, 1.15V±20mV, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
13	-	XC6229D2811R-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
13	-	XC6420AB137R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/1.80V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
13	-	XC6420AB13DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/1.80V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
130	-	XC6415AA307R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.10/4.10V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
130	-	XC6415AA30ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.10/4.10V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
131	-	XC6415AA317R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/2.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
131	-	XC6415AA31ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/2.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
132	-	XC6415AA327R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/1.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
132	-	XC6415AA32ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/1.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
133	-	XC6415AA337R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/3.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
133	-	XC6415AA33ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/3.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
134	-	XC6415AA347R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/3.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
134	-	XC6415AA34ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/3.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
135	-	XC6415AA357R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/2.60V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
135	-	XC6415AA35ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/2.60V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
136	-	XC6415AA367R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.00/2.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
136	-	XC6415AA36ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.00/2.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
137	-	XC6415AA377R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/4.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
137	-	XC6415AA37ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/4.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
138	-	XC6415AA387R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/2.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
138	-	XC6415AA38ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/2.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
139	-	XC6415AA397R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/2.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
139	-	XC6415AA39ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/2.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
14	-	RP110L201B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
14	-	XC6221C4217R	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
14	-	XC6223B1419R-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
14	-	XC6224A12B7R	LVR-IC	LDO, 1.25V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
14	-	XC6229D28B1R-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
14	-	XC6420AB147R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/2.50V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
14	-	XC6420AB14DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/2.50V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
140	-	XC6415AA407R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/2.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
140	-	XC6415AA40ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/2.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
141	-	XC6415AA417R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/3.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
141	-	XC6415AA41ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/3.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
142	-	XC6415AA427R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.90/1.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
142	-	XC6415AA42ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.90/1.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
143	-	XC6415AA437R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/1.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
143	-	XC6415AA43ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/1.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
144	-	XC6415AA447R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/1.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
144	-	XC6415AA44ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/1.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1442	-	G1442RD1D	Lin-IC	AF PA, BTL, 2.7..5.5V, 2.6W(5V/3Ω), shutdown	DFN-8	92	AFP12	9a	Gmt
1442	-	G1442RD1U	Lin-IC	AF PA, BTL, 2.7..5.5V, 2.6W(5V/3Ω), shutdown	DFN-8	92	AFP12	9a	Gmt
1445	-	G1445B31U	Lin-IC	AF PA, BTL, 2.7..5.5V, 2.6W(5V/3Ω), shutdown	BGA-8A	39	-	9a	Gmt
1445	-	G1445RD1D	Lin-IC	AF PA, BTL, 2.7..5.5V, 2.6W(5V/3Ω), shutdown	DFN-8	92	AFP12	9a	Gmt
145	-	XC6415AA457R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/2.85V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
145	-	XC6415AA45ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/2.85V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1453	-	G1453R41U	Lin-IC	AF PA, BTL, 3..5.5V, 2.6W(5V/3Ω), shutdown	TQFN-16	38a5	-	9a	Gmt
1453L	-	G1453LR41U	Lin-IC	AF PA, BTL, 3..5.5V, 2.6W(5V/3Ω), shutdown	TQFN-16	38a5	-	9a	Gmt
1454	-	G1454R41U	Lin-IC	AF PA, BTL, 3..5.5V, 2x2.1W(5V/3Ω), shutdown	TQFN-16	38a5	-	9a	Gmt
1454L	-	G1454LR41U	Lin-IC	AF PA, BTL, 3..5.5V, 2x2.1W(5V/3Ω), shutdown	TQFN-16	38a5	-	9a	Gmt
146	-	XC6415AA467R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/1.20V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
146	-	XC6415AA46ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/1.20V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
147	-	XC6415AA477R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.85/1.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
147	-	XC6415AA47ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.85/1.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
148	-	XC6415AA487R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.20/3.20V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
148	-	XC6415AA48ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.20/3.20V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
149	-	XC6415AA497R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/3.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
149	-	XC6415AA49ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/3.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
15	-	RP110L211B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
15	-	XC6221C4317R	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
15	-	XC6223B1519R-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
15	-	XC6224A13B7R	LVR-IC	LDO, 1.25V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
15	-	XC6229D2911R-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
15	-	XC6420AB157R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/2.85V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
15	-	XC6420AB15DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/2.85V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
150	-	XC6415AA507R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.60/2.85V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
150	-	XC6415AA50ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.60/2.85V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
151	-	XC6415AA517R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=4.20/3.10V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
151	-	XC6415AA51ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=4.20/3.10V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
152	-	XC6415AA527R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=5.00/3.60V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
152	-	XC6415AA52ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=5.00/3.60V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
153	-	XC6415AA537R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/1.20V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
153	-	XC6415AA53ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/1.20V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
154	-	XC6415AA547R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.60/3.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
154	-	XC6415AA54ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.60/3.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
155	-	XC6415AA557R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.60/2.60V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
155	-	XC6415AA55ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.60/2.60V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
156	-	XC6415AA567R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/2.60V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
156	-	XC6415AA56ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/2.60V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
157	-	XC6415AA577R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.60/3.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
157	-	XC6415AA57ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.60/3.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
158	-	XC6415AA587R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/2.90V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
158	-	XC6415AA58ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/2.90V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
159	-	XC6415AA597R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/2.70V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
159	-	XC6415AA59ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/2.70V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
16	-	RP110L221B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
16	-	XC6221C4417R	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
16	-	XC6223B1619R-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
16	-	XC6224A14B7R	LVR-IC	LDO, 1.45V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
16	-	XC6229D29B1R-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
16	-	XC6420AB167R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/2.85V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
16	-	XC6420AB16DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/2.85V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
160	-	XC6415AA607R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.00/2.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
160	-	XC6415AA60ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.00/2.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
161	-	XC6415AA617R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/1.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
161	-	XC6415AA61ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/1.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
162	-	XC6415AA627R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.70/1.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
162	-	XC6415AA62ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.70/1.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
163	-	XC6415AA637R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/2.70V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
163	-	XC6415AA63ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/2.70V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
164	-	XC6415AA647R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/3.10V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
164	-	XC6415AA64ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/3.10V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
165	-	XC6415AA657R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.85/3.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
165	-	XC6415AA65ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.85/3.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
166	-	XC6415AA667R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/3.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
166	-	XC6415AA66ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/3.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
167	-	XC6415AA677R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/2.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
167	-	XC6415AA67ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/2.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
168	-	XC6415AA687R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.85/1.20V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
168	-	XC6415AA68ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.85/1.20V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
169	-	XC6415AA697R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.75/2.75V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
169	-	XC6415AA69ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.75/2.75V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
17	-	RP110L231B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
17	-	XC6217C0827R-G	LVR-IC	LDO, 0.8V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
17	-	XC6221C4517R	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
17	-	XC6223B1719R-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
17	-	XC6224A15B7R	LVR-IC	LDO, 1.55V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
17	-	XC6229D3011R-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
17	-	XC6420AB177R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/3.00V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
17	-	XC6420AB17DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/3.00V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
170	-	XC6415AA707R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/2.90V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
170	-	XC6415AA70ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/2.90V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
171	-	XC6415AA717R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/2.95V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
171	-	XC6415AA71ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/2.95V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
172	-	XC6415AA727R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/3.05V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
172	-	XC6415AA72ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/3.05V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
173	-	XC6415AA737R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.10/2.90V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
173	-	XC6415AA73ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.10/2.90V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
174	-	XC6415AA747R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.10/2.95V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
174	-	XC6415AA74ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.10/2.95V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
175	-	XC6415AA757R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.10/3.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
175	-	XC6415AA75ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.10/3.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
176	-	XC6415AA767R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.10/3.05V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
176	-	XC6415AA76ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.10/3.05V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
177	-	XC6415AA777R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/3.10V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
177	-	XC6415AA77ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/3.10V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
178	-	XC6415AA787R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/2.60V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
178	-	XC6415AA78ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/2.60V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
179	-	XC6415AA797R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.50/3.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
179	-	XC6415AA79ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.50/3.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
18	-	RP110L241B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
18	-	XC6217C0927R-G	LVR-IC	LDO, 0.9V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
18	-	XC6221C4617R	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
18	-	XC6223B1819R-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
18	-	XC6224A16B7R	LVR-IC	LDO, 1.65V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
18	-	XC6229D30B1R-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
18	-	XC6420AB187R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/1.80V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
18	-	XC6420AB18DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/1.80V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
180	-	XC6415AA807R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.10/1.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
180	-	XC6415AA80ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.10/1.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
181	-	XC6415AA817R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.00/3.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
181	-	XC6415AA81ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.00/3.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
182	-	XC6415AA827R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/2.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
182	-	XC6415AA82ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/2.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
183	-	XC6415AA837R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/1.20V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
183	-	XC6415AA83ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/1.20V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
184	-	XC6415AA847R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.00/3.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
184	-	XC6415AA84ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.00/3.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
185	-	XC6415AA857R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.70/2.70V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
185	-	XC6415AA85ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.70/2.70V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
186	-	XC6415AA867R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.70/3.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
186	-	XC6415AA86ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.70/3.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
187	-	XC6415AA877R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.90/2.90V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
187	-	XC6415AA87ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.90/2.90V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
188	-	XC6415AA887R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/2.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
188	-	XC6415AA88ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/2.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
189	-	XC6415AA897R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/3.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
189	-	XC6415AA89ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/3.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
19	-	LEE-19+	MMIC	RF amplifier, DC..8GHz, 9.6dB (50Ω)	FG873	36aa	A1	9b	Mc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
19	-	RP110L251B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
19	-	XC6217C1027R-G	LVR-IC	LDO, 1.0V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
19	-	XC6221C4717R	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
19	-	XC6223B1919R-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
19	-	XC6224A17B7R	LVR-IC	LDO, 1.75V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
19	-	XC6229D3111R-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
19	-	XC6420AB197R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/3.30V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
19	-	XC6420AB19DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/3.30V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
190	-	XC6415AA907R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=4.50/4.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
190	-	XC6415AA90ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=4.50/4.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
191	-	XC6415AA917R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/5.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
191	-	XC6415AA91ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/5.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
192	-	XC6415AA927R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/5.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
192	-	XC6415AA92ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/5.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
193	-	XC6415AA937R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/2.90V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
193	-	XC6415AA93ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/2.90V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
194	-	XC6415AA947R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.10/1.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
194	-	XC6415AA94ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.10/1.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
195	-	XC6415AA957R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/1.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
195	-	XC6415AA95ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/1.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
196	-	XC6415AA967R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.00/1.20V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
196	-	XC6415AA96ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.00/1.20V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
197	-	XC6415AA977R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/2.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
197	-	XC6415AA97ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/2.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
198	-	XC6415AA987R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/0.90V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
198	-	XC6415AA98ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.20/0.90V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
199	-	XC6415AA997R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.15/3.15V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
199	-	XC6415AA99ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.15/3.15V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
19A09	-	XC6219A092DR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A0M	-	XC6219A09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A10	-	XC6219A102DR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A11	-	XC6219A112DR	LVR-IC	LDO, 1.1.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A12	-	XC6219A122DR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A13	-	XC6219A132DR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A14	-	XC6219A142DR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A15	-	XC6219A152DR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A16	-	XC6219A162DR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A17	-	XC6219A172DR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A18	-	XC6219A182DR	LVR-IC	LDO, 1.8V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A19	-	XC6219A192DR	LVR-IC	LDO, 1.9V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A1A	-	XC6219A10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A1B	-	XC6219A11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A1C	-	XC6219A12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A1D	-	XC6219A13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A1E	-	XC6219A14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A1F	-	XC6219A15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A1H	-	XC6219A16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A1K	-	XC6219A17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A1L	-	XC6219A18ADR	LVR-IC	LDO, 1.85V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A1M	-	XC6219A19ADR	LVR-IC	LDO, 1.95V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A20	-	XC6219A202DR	LVR-IC	LDO, 2.0V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A20A	-	XC6219A20ADR	LVR-IC	LDO, 2.05V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A21	-	XC6219A212DR	LVR-IC	LDO, 2.1V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A22	-	XC6219A222DR	LVR-IC	LDO, 2.2V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A23	-	XC6219A232DR	LVR-IC	LDO, 2.3V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A24	-	XC6219A242DR	LVR-IC	LDO, 2.4V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A25	-	XC6219A252DR	LVR-IC	LDO, 2.5V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A26	-	XC6219A262DR	LVR-IC	LDO, 2.6V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A27	-	XC6219A272DR	LVR-IC	LDO, 2.7V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A28	-	XC6219A282DR	LVR-IC	LDO, 2.8V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A29	-	XC6219A292DR	LVR-IC	LDO, 2.9V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A2B	-	XC6219A21ADR	LVR-IC	LDO, 2.15V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A2C	-	XC6219A22ADR	LVR-IC	LDO, 2.25V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A2D	-	XC6219A23ADR	LVR-IC	LDO, 2.35V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A2E	-	XC6219A24ADR	LVR-IC	LDO, 2.45V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A2F	-	XC6219A25ADR	LVR-IC	LDO, 2.55V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A2H	-	XC6219A26ADR	LVR-IC	LDO, 2.65V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A2K	-	XC6219A27ADR	LVR-IC	LDO, 2.75V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A2L	-	XC6219A28ADR	LVR-IC	LDO, 2.85V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A2M	-	XC6219A29ADR	LVR-IC	LDO, 2.95V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
19A30	-	XC6219A302DR	LVR-IC	LDO, 3.0V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A31	-	XC6219A312DR	LVR-IC	LDO, 3.1V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A32	-	XC6219A322DR	LVR-IC	LDO, 3.2V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A33	-	XC6219A332DR	LVR-IC	LDO, 3.3V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A34	-	XC6219A342DR	LVR-IC	LDO, 3.4V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A35	-	XC6219A352DR	LVR-IC	LDO, 3.5V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A36	-	XC6219A362DR	LVR-IC	LDO, 3.6V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A37	-	XC6219A372DR	LVR-IC	LDO, 3.7V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A38	-	XC6219A382DR	LVR-IC	LDO, 3.8V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A39	-	XC6219A392DR	LVR-IC	LDO, 3.9V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A3A	-	XC6219A30ADR	LVR-IC	LDO, 3.05V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A3B	-	XC6219A31ADR	LVR-IC	LDO, 3.15V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A3C	-	XC6219A32ADR	LVR-IC	LDO, 3.25V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A3D	-	XC6219A33ADR	LVR-IC	LDO, 3.35V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A3E	-	XC6219A34ADR	LVR-IC	LDO, 3.45V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A3F	-	XC6219A35ADR	LVR-IC	LDO, 3.55V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A3H	-	XC6219A36ADR	LVR-IC	LDO, 3.65V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A3K	-	XC6219A37ADR	LVR-IC	LDO, 3.75V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A3L	-	XC6219A38ADR	LVR-IC	LDO, 3.85V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A3M	-	XC6219A39ADR	LVR-IC	LDO, 3.95V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A40	-	XC6219A402DR	LVR-IC	LDO, 4.0V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A41	-	XC6219A412DR	LVR-IC	LDO, 4.1V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A42	-	XC6219A422DR	LVR-IC	LDO, 4.2V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A43	-	XC6219A432DR	LVR-IC	LDO, 4.3V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A44	-	XC6219A442DR	LVR-IC	LDO, 4.4V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A45	-	XC6219A452DR	LVR-IC	LDO, 4.5V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A46	-	XC6219A462DR	LVR-IC	LDO, 4.6V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A47	-	XC6219A472DR	LVR-IC	LDO, 4.7V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A48	-	XC6219A482DR	LVR-IC	LDO, 4.8V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A49	-	XC6219A492DR	LVR-IC	LDO, 4.9V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A4A	-	XC6219A40ADR	LVR-IC	LDO, 4.05V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A4B	-	XC6219A41ADR	LVR-IC	LDO, 4.15V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A4C	-	XC6219A42ADR	LVR-IC	LDO, 4.25V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A4D	-	XC6219A43ADR	LVR-IC	LDO, 4.35V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A4E	-	XC6219A44ADR	LVR-IC	LDO, 4.45V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A4F	-	XC6219A45ADR	LVR-IC	LDO, 4.55V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A4H	-	XC6219A46ADR	LVR-IC	LDO, 4.65V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A4K	-	XC6219A47ADR	LVR-IC	LDO, 4.75V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A4L	-	XC6219A48ADR	LVR-IC	LDO, 4.85V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A4M	-	XC6219A49ADR	LVR-IC	LDO, 4.95V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19A50	-	XC6219A502DR	LVR-IC	LDO, 5.0V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
19B09	-	XC6219B092DR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B0M	-	XC6219B09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B10	-	XC6219B102DR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B11	-	XC6219B112DR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B12	-	XC6219B122DR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B13	-	XC6219B132DR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B14	-	XC6219B142DR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B15	-	XC6219B152DR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B16	-	XC6219B162DR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B17	-	XC6219B172DR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B18	-	XC6219B182DR	LVR-IC	LDO, 1.8V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B19	-	XC6219B192DR	LVR-IC	LDO, 1.9V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B1A	-	XC6219B10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B1B	-	XC6219B11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B1C	-	XC6219B12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B1D	-	XC6219B13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B1E	-	XC6219B14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B1F	-	XC6219B15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B1H	-	XC6219B16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B1K	-	XC6219B17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B1L	-	XC6219B18ADR	LVR-IC	LDO, 1.85V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B1M	-	XC6219B19ADR	LVR-IC	LDO, 1.95V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B20	-	XC6219B202DR	LVR-IC	LDO, 2.0V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B21	-	XC6219B212DR	LVR-IC	LDO, 2.1V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B22	-	XC6219B222DR	LVR-IC	LDO, 2.2V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B23	-	XC6219B232DR	LVR-IC	LDO, 2.3V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B24	-	XC6219B242DR	LVR-IC	LDO, 2.4V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B25	-	XC6219B252DR	LVR-IC	LDO, 2.5V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B26	-	XC6219B262DR	LVR-IC	LDO, 2.6V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
19B27	-	XC6219B272DR	LVR-IC	LDO, 2.7V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B28	-	XC6219B282DR	LVR-IC	LDO, 2.8V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B29	-	XC6219B292DR	LVR-IC	LDO, 2.9V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B2A	-	XC6219B20ADR	LVR-IC	LDO, 2.05V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B2B	-	XC6219B21ADR	LVR-IC	LDO, 2.15V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B2C	-	XC6219B22ADR	LVR-IC	LDO, 2.25V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B2D	-	XC6219B23ADR	LVR-IC	LDO, 2.35V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B2E	-	XC6219B24ADR	LVR-IC	LDO, 2.45V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B2F	-	XC6219B25ADR	LVR-IC	LDO, 2.55V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B2H	-	XC6219B26ADR	LVR-IC	LDO, 2.65V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B2K	-	XC6219B27ADR	LVR-IC	LDO, 2.75V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B2L	-	XC6219B28ADR	LVR-IC	LDO, 2.85V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B2M	-	XC6219B29ADR	LVR-IC	LDO, 2.95V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B30	-	XC6219B302DR	LVR-IC	LDO, 3.0V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B31	-	XC6219B312DR	LVR-IC	LDO, 3.1V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B32	-	XC6219B322DR	LVR-IC	LDO, 3.2V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B33	-	XC6219B332DR	LVR-IC	LDO, 3.3V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B34	-	XC6219B342DR	LVR-IC	LDO, 3.4V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B35	-	XC6219B352DR	LVR-IC	LDO, 3.5V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B36	-	XC6219B362DR	LVR-IC	LDO, 3.6V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B37	-	XC6219B372DR	LVR-IC	LDO, 3.7V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B38	-	XC6219B382DR	LVR-IC	LDO, 3.8V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B39	-	XC6219B392DR	LVR-IC	LDO, 3.9V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B3A	-	XC6219B30ADR	LVR-IC	LDO, 3.05V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B3B	-	XC6219B31ADR	LVR-IC	LDO, 3.15V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B3C	-	XC6219B32ADR	LVR-IC	LDO, 3.25V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B3D	-	XC6219B33ADR	LVR-IC	LDO, 3.35V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B3E	-	XC6219B34ADR	LVR-IC	LDO, 3.45V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B3F	-	XC6219B35ADR	LVR-IC	LDO, 3.55V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B3H	-	XC6219B36ADR	LVR-IC	LDO, 3.65V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B3K	-	XC6219B37ADR	LVR-IC	LDO, 3.75V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B3L	-	XC6219B38ADR	LVR-IC	LDO, 3.85V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B3M	-	XC6219B39ADR	LVR-IC	LDO, 3.95V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B40	-	XC6219B402DR	LVR-IC	LDO, 4.0V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B41	-	XC6219B412DR	LVR-IC	LDO, 4.1V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B42	-	XC6219B422DR	LVR-IC	LDO, 4.2V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B43	-	XC6219B432DR	LVR-IC	LDO, 4.3V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B44	-	XC6219B442DR	LVR-IC	LDO, 4.4V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B45	-	XC6219B452DR	LVR-IC	LDO, 4.5V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B46	-	XC6219B462DR	LVR-IC	LDO, 4.6V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B47	-	XC6219B472DR	LVR-IC	LDO, 4.7V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B48	-	XC6219B482DR	LVR-IC	LDO, 4.8V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B49	-	XC6219B492DR	LVR-IC	LDO, 4.9V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B4A	-	XC6219B40ADR	LVR-IC	LDO, 4.05V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B4B	-	XC6219B41ADR	LVR-IC	LDO, 4.15V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B4C	-	XC6219B42ADR	LVR-IC	LDO, 4.25V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B4D	-	XC6219B43ADR	LVR-IC	LDO, 4.35V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B4E	-	XC6219B44ADR	LVR-IC	LDO, 4.45V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B4F	-	XC6219B45ADR	LVR-IC	LDO, 4.55V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B4H	-	XC6219B46ADR	LVR-IC	LDO, 4.65V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B4K	-	XC6219B47ADR	LVR-IC	LDO, 4.75V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B4L	-	XC6219B48ADR	LVR-IC	LDO, 4.85V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B4M	-	XC6219B49ADR	LVR-IC	LDO, 4.95V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19B50	-	XC6219B502DR	LVR-IC	LDO, 5.0V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
19C09	-	XC6219C092DR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C0M	-	XC6219C09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C10	-	XC6219C102DR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C11	-	XC6219C112DR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C12	-	XC6219C122DR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C13	-	XC6219C132DR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C14	-	XC6219C142DR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C15	-	XC6219C152DR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C16	-	XC6219C162DR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C17	-	XC6219C172DR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C18	-	XC6219C182DR	LVR-IC	LDO, 1.8V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C19	-	XC6219C192DR	LVR-IC	LDO, 1.9V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C1A	-	XC6219C10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C1B	-	XC6219C11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C1C	-	XC6219C12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C1D	-	XC6219C13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
19C1E	-	XC6219C14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C1F	-	XC6219C15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C1H	-	XC6219C16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C1K	-	XC6219C17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C1L	-	XC6219C18ADR	LVR-IC	LDO, 1.85V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C1M	-	XC6219C19ADR	LVR-IC	LDO, 1.95V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C20	-	XC6219C202DR	LVR-IC	LDO, 2.0V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C21	-	XC6219C212DR	LVR-IC	LDO, 2.1V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C22	-	XC6219C222DR	LVR-IC	LDO, 2.2V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C23	-	XC6219C232DR	LVR-IC	LDO, 2.3V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C24	-	XC6219C242DR	LVR-IC	LDO, 2.4V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C25	-	XC6219C252DR	LVR-IC	LDO, 2.5V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C26	-	XC6219C262DR	LVR-IC	LDO, 2.6V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C27	-	XC6219C272DR	LVR-IC	LDO, 2.7V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C28	-	XC6219C282DR	LVR-IC	LDO, 2.8V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C29	-	XC6219C292DR	LVR-IC	LDO, 2.9V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C2A	-	XC6219C20ADR	LVR-IC	LDO, 2.05V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C2B	-	XC6219C21ADR	LVR-IC	LDO, 2.15V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C2C	-	XC6219C22ADR	LVR-IC	LDO, 2.25V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C2D	-	XC6219C23ADR	LVR-IC	LDO, 2.35V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C2E	-	XC6219C24ADR	LVR-IC	LDO, 2.45V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C2F	-	XC6219C25ADR	LVR-IC	LDO, 2.55V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C2H	-	XC6219C26ADR	LVR-IC	LDO, 2.65V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C2K	-	XC6219C27ADR	LVR-IC	LDO, 2.75V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C2L	-	XC6219C28ADR	LVR-IC	LDO, 2.85V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C2M	-	XC6219C29ADR	LVR-IC	LDO, 2.95V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C30	-	XC6219C302DR	LVR-IC	LDO, 3.0V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C31	-	XC6219C312DR	LVR-IC	LDO, 3.1V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C32	-	XC6219C322DR	LVR-IC	LDO, 3.2V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C33	-	XC6219C332DR	LVR-IC	LDO, 3.3V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C34	-	XC6219C342DR	LVR-IC	LDO, 3.4V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C35	-	XC6219C352DR	LVR-IC	LDO, 3.5V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C36	-	XC6219C362DR	LVR-IC	LDO, 3.6V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C37	-	XC6219C372DR	LVR-IC	LDO, 3.7V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C38	-	XC6219C382DR	LVR-IC	LDO, 3.8V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C39	-	XC6219C392DR	LVR-IC	LDO, 3.9V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C3A	-	XC6219C30ADR	LVR-IC	LDO, 3.05V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C3B	-	XC6219C31ADR	LVR-IC	LDO, 3.15V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C3C	-	XC6219C32ADR	LVR-IC	LDO, 3.25V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C3D	-	XC6219C33ADR	LVR-IC	LDO, 3.35V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C3E	-	XC6219C34ADR	LVR-IC	LDO, 3.45V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C3F	-	XC6219C35ADR	LVR-IC	LDO, 3.55V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C3H	-	XC6219C36ADR	LVR-IC	LDO, 3.65V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C3K	-	XC6219C37ADR	LVR-IC	LDO, 3.75V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C3L	-	XC6219C38ADR	LVR-IC	LDO, 3.85V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C3M	-	XC6219C39ADR	LVR-IC	LDO, 3.95V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C40	-	XC6219C402DR	LVR-IC	LDO, 4.0V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C41	-	XC6219C412DR	LVR-IC	LDO, 4.1V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C42	-	XC6219C422DR	LVR-IC	LDO, 4.2V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C43	-	XC6219C432DR	LVR-IC	LDO, 4.3V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C44	-	XC6219C442DR	LVR-IC	LDO, 4.4V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C45	-	XC6219C452DR	LVR-IC	LDO, 4.5V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C46	-	XC6219C462DR	LVR-IC	LDO, 4.6V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C47	-	XC6219C472DR	LVR-IC	LDO, 4.7V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C48	-	XC6219C482DR	LVR-IC	LDO, 4.8V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C49	-	XC6219C492DR	LVR-IC	LDO, 4.9V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C4A	-	XC6219C40ADR	LVR-IC	LDO, 4.05V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C4B	-	XC6219C41ADR	LVR-IC	LDO, 4.15V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C4C	-	XC6219C42ADR	LVR-IC	LDO, 4.25V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C4D	-	XC6219C43ADR	LVR-IC	LDO, 4.35V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C4E	-	XC6219C44ADR	LVR-IC	LDO, 4.45V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C4F	-	XC6219C45ADR	LVR-IC	LDO, 4.55V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C4H	-	XC6219C46ADR	LVR-IC	LDO, 4.65V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C4K	-	XC6219C47ADR	LVR-IC	LDO, 4.75V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C4L	-	XC6219C48ADR	LVR-IC	LDO, 4.85V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C4M	-	XC6219C49ADR	LVR-IC	LDO, 4.95V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19C50	-	XC6219C502DR	LVR-IC	LDO, 5.0V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
19D09	-	XC6219D092DR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D0M	-	XC6219D09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D10	-	XC6219D102DR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
19D11	-	XC6219D112DR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D12	-	XC6219D122DR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D13	-	XC6219D132DR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D14	-	XC6219D142DR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D15	-	XC6219D152DR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D16	-	XC6219D162DR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D17	-	XC6219D172DR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D18	-	XC6219D182DR	LVR-IC	LDO, 1.8V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D19	-	XC6219D192DR	LVR-IC	LDO, 1.9V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D1A	-	XC6219D10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D1B	-	XC6219D11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D1C	-	XC6219D12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D1D	-	XC6219D13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D1E	-	XC6219D14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D1F	-	XC6219D15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D1H	-	XC6219D16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D1K	-	XC6219D17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D1L	-	XC6219D18ADR	LVR-IC	LDO, 1.85V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D1M	-	XC6219D19ADR	LVR-IC	LDO, 1.95V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D20	-	XC6219D202DR	LVR-IC	LDO, 2.0V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D21	-	XC6219D212DR	LVR-IC	LDO, 2.1V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D22	-	XC6219D222DR	LVR-IC	LDO, 2.2V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D23	-	XC6219D232DR	LVR-IC	LDO, 2.3V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D24	-	XC6219D242DR	LVR-IC	LDO, 2.4V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D25	-	XC6219D252DR	LVR-IC	LDO, 2.5V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D26	-	XC6219D262DR	LVR-IC	LDO, 2.6V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D27	-	XC6219D272DR	LVR-IC	LDO, 2.7V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D28	-	XC6219D282DR	LVR-IC	LDO, 2.8V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D29	-	XC6219D292DR	LVR-IC	LDO, 2.9V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D2A	-	XC6219D20ADR	LVR-IC	LDO, 2.05V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D2B	-	XC6219D21ADR	LVR-IC	LDO, 2.15V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D2C	-	XC6219D22ADR	LVR-IC	LDO, 2.25V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D2D	-	XC6219D23ADR	LVR-IC	LDO, 2.35V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D2E	-	XC6219D24ADR	LVR-IC	LDO, 2.45V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D2F	-	XC6219D25ADR	LVR-IC	LDO, 2.55V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D2H	-	XC6219D26ADR	LVR-IC	LDO, 2.65V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D2K	-	XC6219D27ADR	LVR-IC	LDO, 2.75V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D2L	-	XC6219D28ADR	LVR-IC	LDO, 2.85V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D2M	-	XC6219D29ADR	LVR-IC	LDO, 2.95V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D30	-	XC6219D302DR	LVR-IC	LDO, 3.0V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D31	-	XC6219D312DR	LVR-IC	LDO, 3.1V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D32	-	XC6219D322DR	LVR-IC	LDO, 3.2V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D33	-	XC6219D332DR	LVR-IC	LDO, 3.3V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D34	-	XC6219D342DR	LVR-IC	LDO, 3.4V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D35	-	XC6219D352DR	LVR-IC	LDO, 3.5V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D36	-	XC6219D362DR	LVR-IC	LDO, 3.6V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D37	-	XC6219D372DR	LVR-IC	LDO, 3.7V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D38	-	XC6219D382DR	LVR-IC	LDO, 3.8V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D39	-	XC6219D392DR	LVR-IC	LDO, 3.9V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D3A	-	XC6219D30ADR	LVR-IC	LDO, 3.05V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D3B	-	XC6219D31ADR	LVR-IC	LDO, 3.15V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D3C	-	XC6219D32ADR	LVR-IC	LDO, 3.25V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D3D	-	XC6219D33ADR	LVR-IC	LDO, 3.35V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D3E	-	XC6219D34ADR	LVR-IC	LDO, 3.45V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D3F	-	XC6219D35ADR	LVR-IC	LDO, 3.55V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D3H	-	XC6219D36ADR	LVR-IC	LDO, 3.65V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D3K	-	XC6219D37ADR	LVR-IC	LDO, 3.75V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D3L	-	XC6219D38ADR	LVR-IC	LDO, 3.85V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D3M	-	XC6219D39ADR	LVR-IC	LDO, 3.95V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D40	-	XC6219D402DR	LVR-IC	LDO, 4.0V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D41	-	XC6219D412DR	LVR-IC	LDO, 4.1V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D42	-	XC6219D422DR	LVR-IC	LDO, 4.2V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D43	-	XC6219D432DR	LVR-IC	LDO, 4.3V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D44	-	XC6219D442DR	LVR-IC	LDO, 4.4V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D45	-	XC6219D452DR	LVR-IC	LDO, 4.5V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D46	-	XC6219D462DR	LVR-IC	LDO, 4.6V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D47	-	XC6219D472DR	LVR-IC	LDO, 4.7V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D48	-	XC6219D482DR	LVR-IC	LDO, 4.8V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D49	-	XC6219D492DR	LVR-IC	LDO, 4.9V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D4A	-	XC6219D40ADR	LVR-IC	LDO, 4.05V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
19D4B	-	XC6219D41ADR	LVR-IC	LDO, 4.15V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D4C	-	XC6219D42ADR	LVR-IC	LDO, 4.25V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D4D	-	XC6219D43ADR	LVR-IC	LDO, 4.35V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D4E	-	XC6219D44ADR	LVR-IC	LDO, 4.45V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D4F	-	XC6219D45ADR	LVR-IC	LDO, 4.55V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D4H	-	XC6219D46ADR	LVR-IC	LDO, 4.65V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D4K	-	XC6219D47ADR	LVR-IC	LDO, 4.75V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D4L	-	XC6219D48ADR	LVR-IC	LDO, 4.85V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D4M	-	XC6219D49ADR	LVR-IC	LDO, 4.95V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
19D50	-	XC6219D502DR	LVR-IC	LDO, 5.0V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
1A	-	R3117K071A	Vdet-IC	0.7V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1A	-	RP100K121B	LVR-IC	LDO, LN, 1.2V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1A	-	RP112K121B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1A	-	RP173K121A	LVR-IC	LDO, 1.2V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1A	-	XC6217C1127R-G	LVR-IC	LDO, 1.1V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1A	-	XC6221C4817R	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
1A	-	XC6223B2019R-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1A	-	XC6224A18B7R	LVR-IC	LDO, 1.85V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
1A	-	XC6229D31B1R-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1A0	-	XC6415AAA07R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.10/1.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1A0	-	XC6415AAA0ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.10/1.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1A08	-	XC6217A082DR	LVR-IC	LDO, 0.8V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A09	-	XC6217A092DR	LVR-IC	LDO, 0.9V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A0L	-	XC6217A08ADR	LVR-IC	LDO, 0.85V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A0M	-	XC6217A09ADR	LVR-IC	LDO, 0.95V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A1	-	XC6415AAA17R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/2.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1A1	-	XC6415AAA1ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/2.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1A10	-	XC6217A102DR	LVR-IC	LDO, 1.0V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A11	-	XC6217A112DR	LVR-IC	LDO, 1.1V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A12	-	XC6217A122DR	LVR-IC	LDO, 1.2V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A13	-	XC6217A132DR	LVR-IC	LDO, 1.3V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A14	-	XC6217A142DR	LVR-IC	LDO, 1.4V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A15	-	XC6217A152DR	LVR-IC	LDO, 1.5V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A16	-	XC6217A162DR	LVR-IC	LDO, 1.6V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A17	-	XC6217A172DR	LVR-IC	LDO, 1.7V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A18	-	XC6217A182DR	LVR-IC	LDO, 1.8V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A19	-	XC6217A192DR	LVR-IC	LDO, 1.9V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A1A	-	XC6217A10ADR	LVR-IC	LDO, 1.05V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A1B	-	XC6217A11ADR	LVR-IC	LDO, 1.15V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A1C	-	XC6217A12ADR	LVR-IC	LDO, 1.25V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A1D	-	XC6217A13ADR	LVR-IC	LDO, 1.35V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A1E	-	XC6217A14ADR	LVR-IC	LDO, 1.45V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A1F	-	XC6217A15ADR	LVR-IC	LDO, 1.55V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A1H	-	XC6217A16ADR	LVR-IC	LDO, 1.65V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A1K	-	XC6217A17ADR	LVR-IC	LDO, 1.75V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A1L	-	XC6217A18ADR	LVR-IC	LDO, 1.85V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A1M	-	XC6217A19ADR	LVR-IC	LDO, 1.95V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A2	-	XC6415AAA27R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/1.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1A2	-	XC6415AAA2ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/1.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1A20	-	XC6217A202DR	LVR-IC	LDO, 2.0V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A21	-	XC6217A212DR	LVR-IC	LDO, 2.1V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A22	-	XC6217A222DR	LVR-IC	LDO, 2.2V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A23	-	XC6217A232DR	LVR-IC	LDO, 2.3V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A24	-	XC6217A242DR	LVR-IC	LDO, 2.4V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A25	-	XC6217A252DR	LVR-IC	LDO, 2.5V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A26	-	XC6217A262DR	LVR-IC	LDO, 2.6V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A27	-	XC6217A272DR	LVR-IC	LDO, 2.7V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A28	-	XC6217A282DR	LVR-IC	LDO, 2.8V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A29	-	XC6217A292DR	LVR-IC	LDO, 2.9V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A2A	-	XC6217A20ADR	LVR-IC	LDO, 2.05V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A2B	-	XC6217A21ADR	LVR-IC	LDO, 2.15V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A2C	-	XC6217A22ADR	LVR-IC	LDO, 2.25V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A2D	-	XC6217A23ADR	LVR-IC	LDO, 2.35V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A2E	-	XC6217A24ADR	LVR-IC	LDO, 2.45V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A2F	-	XC6217A25ADR	LVR-IC	LDO, 2.55V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A2H	-	XC6217A26ADR	LVR-IC	LDO, 2.65V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A2K	-	XC6217A27ADR	LVR-IC	LDO, 2.75V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A2L	-	XC6217A28ADR	LVR-IC	LDO, 2.85V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A2M	-	XC6217A29ADR	LVR-IC	LDO, 2.95V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A3	-	XC6415AAA37R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.85/2.60V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1A3	-	XC6415AAA3ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.85/2.60V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1A30	-	XC6217A302DR	LVR-IC	LDO, 3.0V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A31	-	XC6217A312DR	LVR-IC	LDO, 3.1V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A32	-	XC6217A322DR	LVR-IC	LDO, 3.2V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A33	-	XC6217A332DR	LVR-IC	LDO, 3.3V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A34	-	XC6217A342DR	LVR-IC	LDO, 3.4V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A35	-	XC6217A352DR	LVR-IC	LDO, 3.5V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A36	-	XC6217A362DR	LVR-IC	LDO, 3.6V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A37	-	XC6217A372DR	LVR-IC	LDO, 3.7V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A38	-	XC6217A382DR	LVR-IC	LDO, 3.8V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A39	-	XC6217A392DR	LVR-IC	LDO, 3.9V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A3A	-	XC6217A30ADR	LVR-IC	LDO, 3.05V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A3B	-	XC6217A31ADR	LVR-IC	LDO, 3.15V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A3C	-	XC6217A32ADR	LVR-IC	LDO, 3.25V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A3D	-	XC6217A33ADR	LVR-IC	LDO, 3.35V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A3E	-	XC6217A34ADR	LVR-IC	LDO, 3.45V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A3F	-	XC6217A35ADR	LVR-IC	LDO, 3.55V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A3H	-	XC6217A36ADR	LVR-IC	LDO, 3.65V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A3K	-	XC6217A37ADR	LVR-IC	LDO, 3.75V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A3L	-	XC6217A38ADR	LVR-IC	LDO, 3.85V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A3M	-	XC6217A39ADR	LVR-IC	LDO, 3.95V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A4	-	XC6415AAA47R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.25/2.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1A4	-	XC6415AAA4ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.25/2.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1A40	-	XC6217A402DR	LVR-IC	LDO, 4.0V±2%, 200mA, +CE, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1A5	-	XC6415AAA57R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.85/1.20V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1A5	-	XC6415AAA5ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.85/1.20V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1A6	-	XC6415AAA67R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/1.20V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1A6	-	XC6415AAA6ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/1.20V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1A7	-	XC6415AAA77R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/1.95V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1A7	-	XC6415AAA7ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/1.95V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1A8	-	XC6415AAA87R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.85/3.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1A8	-	XC6415AAA8ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.85/3.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1A9	-	XC6415AAA97R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.55/2.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1A9	-	XC6415AAA9ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.55/2.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1B	-	R3117K081A	Vdet-IC	0.8V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1B	-	RP100K131B	LVR-IC	LDO, LN, 1.3V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1B	-	RP112K121B5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1B	-	RP173K121A5	LVR-IC	LDO, 1.25V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1B	-	UNRF1A3	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=47k/47k	ML3	22ta	-	2b	Pan
1B	-	XC6217C1227R-G	LVR-IC	LDO, 1.2V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1B	-	XC6221C4917R	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
1B	-	XC6223B2119R-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1B	-	XC6224A19B7R	LVR-IC	LDO, 1.95V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
1B	-	XC6229D3211R-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1B0	-	XC6415AAB07R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.90/1.90V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1B0	-	XC6415AAB0ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.90/1.90V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1B08	-	XC6217B082DR	LVR-IC	LDO, 0.8V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B09	-	XC6217B092DR	LVR-IC	LDO, 0.9V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B0L	-	XC6217B08ADR	LVR-IC	LDO, 0.85V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B0M	-	XC6217B09ADR	LVR-IC	LDO, 0.95V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B1	-	XC6415AAB17R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/2.85V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1B1	-	XC6415AAB1ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/2.85V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1B10	-	XC6217B102DR	LVR-IC	LDO, 1.0V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B11	-	XC6217B112DR	LVR-IC	LDO, 1.1V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B12	-	XC6217B122DR	LVR-IC	LDO, 1.2V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B13	-	XC6217B132DR	LVR-IC	LDO, 1.3V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B14	-	XC6217B142DR	LVR-IC	LDO, 1.4V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B15	-	XC6217B152DR	LVR-IC	LDO, 1.5V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B16	-	XC6217B162DR	LVR-IC	LDO, 1.6V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B17	-	XC6217B172DR	LVR-IC	LDO, 1.7V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B18	-	XC6217B182DR	LVR-IC	LDO, 1.8V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B19	-	XC6217B192DR	LVR-IC	LDO, 1.9V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B1A	-	XC6217B10ADR	LVR-IC	LDO, 1.05V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B1B	-	XC6217B11ADR	LVR-IC	LDO, 1.15V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B1C	-	XC6217B12ADR	LVR-IC	LDO, 1.25V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B1D	-	XC6217B13ADR	LVR-IC	LDO, 1.35V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B1E	-	XC6217B14ADR	LVR-IC	LDO, 1.45V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B1F	-	XC6217B15ADR	LVR-IC	LDO, 1.55V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B1H	-	XC6217B16ADR	LVR-IC	LDO, 1.65V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B1K	-	XC6217B17ADR	LVR-IC	LDO, 1.75V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1B1L	-	XC6217B18ADR	LVR-IC	LDO, 1.85V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B1M	-	XC6217B19ADR	LVR-IC	LDO, 1.95V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B2	-	XC6415AAB27R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/1.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1B2	-	XC6415AAB2ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/1.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1B20	-	XC6217B202DR	LVR-IC	LDO, 2.0V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B21	-	XC6217B212DR	LVR-IC	LDO, 2.1V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B22	-	XC6217B222DR	LVR-IC	LDO, 2.2V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B23	-	XC6217B232DR	LVR-IC	LDO, 2.3V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B24	-	XC6217B242DR	LVR-IC	LDO, 2.4V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B25	-	XC6217B252DR	LVR-IC	LDO, 2.5V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B26	-	XC6217B262DR	LVR-IC	LDO, 2.6V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B27	-	XC6217B272DR	LVR-IC	LDO, 2.7V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B2A	-	XC6217B20ADR	LVR-IC	LDO, 2.05V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B2B	-	XC6217B21ADR	LVR-IC	LDO, 2.15V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B2C	-	XC6217B22ADR	LVR-IC	LDO, 2.25V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B2D	-	XC6217B23ADR	LVR-IC	LDO, 2.35V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B2E	-	XC6217B24ADR	LVR-IC	LDO, 2.45V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B2F	-	XC6217B25ADR	LVR-IC	LDO, 2.55V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B2H	-	XC6217B26ADR	LVR-IC	LDO, 2.65V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B2K	-	XC6217B27ADR	LVR-IC	LDO, 2.75V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B2L	-	XC6217B28ADR	LVR-IC	LDO, 2.85V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B2M	-	XC6217B29ADR	LVR-IC	LDO, 2.95V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B3	-	XC6415AAB37R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.30/1.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1B3	-	XC6415AAB3ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.30/1.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1B30	-	XC6217B302DR	LVR-IC	LDO, 3.0V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B31	-	XC6217B312DR	LVR-IC	LDO, 3.1V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B32	-	XC6217B322DR	LVR-IC	LDO, 3.2V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B33	-	XC6217B332DR	LVR-IC	LDO, 3.3V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B34	-	XC6217B342DR	LVR-IC	LDO, 3.4V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B35	-	XC6217B352DR	LVR-IC	LDO, 3.5V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B36	-	XC6217B362DR	LVR-IC	LDO, 3.6V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B37	-	XC6217B372DR	LVR-IC	LDO, 3.7V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B38	-	XC6217B382DR	LVR-IC	LDO, 3.8V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B39	-	XC6217B392DR	LVR-IC	LDO, 3.9V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B3A	-	XC6217B30ADR	LVR-IC	LDO, 3.05V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B3B	-	XC6217B31ADR	LVR-IC	LDO, 3.15V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B3C	-	XC6217B32ADR	LVR-IC	LDO, 3.25V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B3D	-	XC6217B33ADR	LVR-IC	LDO, 3.35V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B3E	-	XC6217B34ADR	LVR-IC	LDO, 3.45V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B3F	-	XC6217B35ADR	LVR-IC	LDO, 3.55V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B3H	-	XC6217B36ADR	LVR-IC	LDO, 3.65V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B3K	-	XC6217B37ADR	LVR-IC	LDO, 3.75V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B3L	-	XC6217B38ADR	LVR-IC	LDO, 3.85V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B3M	-	XC6217B39ADR	LVR-IC	LDO, 3.95V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B4	-	XC6415AAB47R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.70/3.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1B4	-	XC6415AAB4ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.70/3.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1B40	-	XC6217B402DR	LVR-IC	LDO, 4.0V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1B5	-	XC6415AAB57R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/1.90V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1B5	-	XC6415AAB5ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.80/1.90V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1B6	-	XC6415AAB67R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/0.90V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1B6	-	XC6415AAB6ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/0.90V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1B7	-	XC6415AAB77R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.15/2.85V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1B7	-	XC6415AAB7ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.15/2.85V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1B8	-	XC6415AAB87R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.60/1.30V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1B8	-	XC6415AAB8ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.60/1.30V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1B9	-	XC6415AAB97R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/2.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1B9	-	XC6415AAB9ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/2.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1BX	-	XC6217B282DR	LVR-IC	LDO, 2.8V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1BY	-	XC6217B292DR	LVR-IC	LDO, 2.9V±2%, 200mA, +CE, CL, Shutdown	USP-4D	45cv	VR4a	9b	Tor
1C	-	R3117K091A	Vdet-IC	0.9V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1C	-	RP100K151B	LVR-IC	LDO, LN, 1.5V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1C	-	RP112K131B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1C	-	RP173K131A	LVR-IC	LDO, 1.3V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1C	-	UNRF2AL	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=4k7/4k7	ML3	22ta	-	2b	Pan
1C	-	XC6217C1327R-G	LVR-IC	LDO, 1.3V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1C	-	XC6221C5017R	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
1C	-	XC6223B2219R-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1C	-	XC6224A20B7R	LVR-IC	LDO, 2.05V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
1C	-	XC6229D32B1R-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1C0	-	XC6415AAC07R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/1.10V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1C0	-	XC6415AAC0ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/1.10V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1C0	-	XC6503D121GR-G	LVR-IC	LDO, 1.2V±20mV, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1C1	-	XC6415AAC17R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/2.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1C1	-	XC6415AAC1ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/2.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1C1	-	XC6503D131GR-G	LVR-IC	LDO, 1.3V±20mV, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1C2	-	XC6415AAC27R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.85/2.85V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1C2	-	XC6415AAC2ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.85/2.85V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1C2	-	XC6503D141GR-G	LVR-IC	LDO, 1.4V±20mV, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1C3	-	XC6415AAC37R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/2.90V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1C3	-	XC6415AAC3ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/2.90V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1C3	-	XC6503D151GR-G	LVR-IC	LDO, 1.5V±20mV, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1C4	-	XC6415AAC47R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/3.20V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1C4	-	XC6415AAC4ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/3.20V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1C4	-	XC6503D161GR-G	LVR-IC	LDO, 1.6V±20mV, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1C5	-	XC6415AAC57R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.00/2.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1C5	-	XC6415AAC5ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.00/2.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1C5	-	XC6503D171GR-G	LVR-IC	LDO, 1.7V±20mV, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1C6	-	XC6415AAC67R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.10/2.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1C6	-	XC6415AAC6ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.10/2.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1C6	-	XC6503D181GR-G	LVR-IC	LDO, 1.8V±20mV, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1C7	-	XC6415AAC77R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/3.60V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1C7	-	XC6415AAC7ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/3.60V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1C7	-	XC6503D191GR-G	LVR-IC	LDO, 1.9V±20mV, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1C8	-	XC6415AAC87R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.30/3.00V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1C8	-	XC6415AAC8ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.30/3.00V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1C8	-	XC6503D201GR-G	LVR-IC	LDO, 2.0V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1C9	-	XC6415AAC97R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/2.40V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1C9	-	XC6415AAC9ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.50/2.40V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1C9	-	XC6503D211GR-G	LVR-IC	LDO, 2.1V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CA	-	XC6503D221GR-G	LVR-IC	LDO, 2.2V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CB	-	XC6503D231GR-G	LVR-IC	LDO, 2.3V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CC	-	XC6503D241GR-G	LVR-IC	LDO, 2.4V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CD	-	XC6503D251GR-G	LVR-IC	LDO, 2.5V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CE	-	XC6503D261GR-G	LVR-IC	LDO, 2.6V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CF	-	XC6503D271GR-G	LVR-IC	LDO, 2.7V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CH	-	XC6503D281GR-G	LVR-IC	LDO, 2.8V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CK	-	XC6503D291GR-G	LVR-IC	LDO, 2.9V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CL	-	XC6503D301GR-G	LVR-IC	LDO, 3.0V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CM	-	XC6503D311GR-G	LVR-IC	LDO, 3.1V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CN	-	XC6503D321GR-G	LVR-IC	LDO, 3.2V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CP	-	XC6503D331GR-G	LVR-IC	LDO, 3.3V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CR	-	XC6503D341GR-G	LVR-IC	LDO, 3.4V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CS	-	XC6503D351GR-G	LVR-IC	LDO, 3.5V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CT	-	XC6503D361GR-G	LVR-IC	LDO, 3.6V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CU	-	XC6503D371GR-G	LVR-IC	LDO, 3.7V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CV	-	XC6503D381GR-G	LVR-IC	LDO, 3.8V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CX	-	XC6503D391GR-G	LVR-IC	LDO, 3.9V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CY	-	XC6503D401GR-G	LVR-IC	LDO, 4.0V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1CZ	-	XC6503D411GR-G	LVR-IC	LDO, 4.1V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1D	-	R3117K101A	Vdet-IC	1.0V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1D	-	RP100K181B	LVR-IC	LDO, LN, 1.8V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1D	-	RP112K141B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1D	-	RP173K141A	LVR-IC	LDO, 1.4V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1D	-	XC6217C1427R-G	LVR-IC	LDO, 1.4V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1D	-	XC6223B2319R-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1D	-	XC6224A21B7R	LVR-IC	LDO, 2.15V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
1D	-	XC6229D3311R-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1D0	-	XC6415AAD07R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/3.60V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1D0	-	XC6415AAD0ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/3.60V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1D0	-	XC6503D421GR-G	LVR-IC	LDO, 4.2V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1D1	-	XC6415AAD17R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.00/2.85V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1D1	-	XC6415AAD1ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.00/2.85V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1D1	-	XC6503D431GR-G	LVR-IC	LDO, 4.3V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1D2	-	XC6415AAD27R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/1.85V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1D2	-	XC6415AAD2ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=1.80/1.85V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1D2	-	XC6503D441GR-G	LVR-IC	LDO, 4.4V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1D3	-	XC6415AAD37R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.60/1.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1D3	-	XC6415AAD3ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.60/1.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1D3	-	XC6503D451GR-G	LVR-IC	LDO, 4.5V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1D4	-	XC6415AAD47R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/2.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1D4	-	XC6415AAD4ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.00/2.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1D4	-	XC6503D461GR-G	LVR-IC	LDO, 4.6V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1D5	-	XC6415AAD57R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=4.50/2.60V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1D5	-	XC6415AAD5ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=4.50/2.60V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1D5	-	XC6503D471GR-G	LVR-IC	LDO, 4.7V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1D6	-	XC6415AAD67R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.00/1.80V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1D6	-	XC6415AAD6ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.00/1.80V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1D6	-	XC6503D481GR-G	LVR-IC	LDO, 4.8V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1D7	-	XC6415AAD77R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/3.10V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1D7	-	XC6415AAD7ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.30/3.10V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1D7	-	XC6503D491GR-G	LVR-IC	LDO, 4.9V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1D8	-	XC6415AAD87R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.20/3.10V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1D8	-	XC6415AAD8ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.20/3.10V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1D8	-	XC6503D501GR-G	LVR-IC	LDO, 5.0V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1D9	-	XC6415AAD97R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.40/3.10V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1D9	-	XC6415AAD9ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.40/3.10V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1E	-	R3117K111A	Vdet-IC	1.1V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1E	-	RP100K181B5	LVR-IC	LDO, LN, 1.85V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1E	-	RP112K151B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1E	-	RP173K151A	LVR-IC	LDO, 1.5V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1E	-	XC6217C1527R-G	LVR-IC	LDO, 1.5V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1E	-	XC6223B2419R-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1E	-	XC6224A22B7R	LVR-IC	LDO, 2.25V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
1E	-	XC6229D33B1R-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1E0	-	XC6415AAE07R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.10/2.50V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1E0	-	XC6415AAE0ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.10/2.50V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1E0	-	XC6503D12AGR-G	LVR-IC	LDO, 1.25V±20mV, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1E1	-	XC6415AAE17R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/3.10V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1E1	-	XC6415AAE1ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=2.50/3.10V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1E1	-	XC6503D13AGR-G	LVR-IC	LDO, 1.35V±20mV, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1E2	-	XC6415AAE27R-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.40/3.40V±1%, 200mA, +CE	USPN-6	52xv	VR19	9b	Tor
1E2	-	XC6415AAE2ER-G	LVR-IC	LDO, Dual out, Vot1/Vout2=3.40/3.40V±1%, 200mA, +CE	USP-6C	49xv	VR19	9a	Tor
1E2	-	XC6503D14AGR-G	LVR-IC	LDO, 1.45V±20mV, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1E3	-	XC6503D15AGR-G	LVR-IC	LDO, 1.55V±20mV, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1E4	-	XC6503D16AGR-G	LVR-IC	LDO, 1.65V±20mV, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1E5	-	XC6503D17AGR-G	LVR-IC	LDO, 1.75V±20mV, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1E6	-	XC6503D18AGR-G	LVR-IC	LDO, 1.85V±20mV, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1E7	-	XC6503D19AGR-G	LVR-IC	LDO, 1.95V±20mV, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1E8	-	XC6503D20AGR-G	LVR-IC	LDO, 2.05V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1E9	-	XC6503D21AGR-G	LVR-IC	LDO, 2.15V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1EA	-	XC6503D22AGR-G	LVR-IC	LDO, 2.25V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1EB	-	XC6503D23AGR-G	LVR-IC	LDO, 2.35V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1EC	-	XC6503D24AGR-G	LVR-IC	LDO, 2.45V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1ED	-	XC6503D25AGR-G	LVR-IC	LDO, 2.55V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1EE	-	XC6503D26AGR-G	LVR-IC	LDO, 2.65V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1EF	-	XC6503D27AGR-G	LVR-IC	LDO, 2.75V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1EH	-	XC6503D28AGR-G	LVR-IC	LDO, 2.85V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1EK	-	XC6503D29AGR-G	LVR-IC	LDO, 2.95V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1EL	-	XC6503D30AGR-G	LVR-IC	LDO, 3.05V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1EM	-	XC6503D31AGR-G	LVR-IC	LDO, 3.15V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1EN	-	XC6503D32AGR-G	LVR-IC	LDO, 3.25V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1EP	-	XC6503D33AGR-G	LVR-IC	LDO, 3.35V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1ER	-	XC6503D34AGR-G	LVR-IC	LDO, 3.45V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1ES	-	XC6503D35AGR-G	LVR-IC	LDO, 3.55V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1ET	-	XC6503D36AGR-G	LVR-IC	LDO, 3.65V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1EU	-	XC6503D37AGR-G	LVR-IC	LDO, 3.75V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1EV	-	XC6503D38AGR-G	LVR-IC	LDO, 3.85V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1EX	-	XC6503D39AGR-G	LVR-IC	LDO, 3.95V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1EY	-	XC6503D40AGR-G	LVR-IC	LDO, 4.05V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1EZ	-	XC6503D41AGR-G	LVR-IC	LDO, 4.15V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1F	-	2SC5838	Si-npn	RF, LN, 15V, 80mA, 100mW, B=110..250, 6GHz	ML3-N2	22ta	-	2b	Pan
1F	-	BC847BLP	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, >100MHz	DFN1006-3	22ta	-	2a	Di
1F	-	R3117K121A	Vdet-IC	1.2V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1F	-	RP100K191B	LVR-IC	LDO, LN, 1.9V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1F	-	RP112K161B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1F	-	RP173K161A	LVR-IC	LDO, 1.6V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1F	-	XC6217C1627R-G	LVR-IC	LDO, 1.6V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1F	-	XC6223B2519R-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1F	-	XC6224A23B7R	LVR-IC	LDO, 2.25V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
1F	-	XC6229D3411R-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1F0	-	XC6503D42AGR-G	LVR-IC	LDO, 4.25V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1F1	-	XC6503D43AGR-G	LVR-IC	LDO, 4.35V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1F2	-	XC6503D44AGR-G	LVR-IC	LDO, 4.45V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1F3	-	XC6503D45AGR-G	LVR-IC	LDO, 4.55V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1F4	-	XC6503D46AGR-G	LVR-IC	LDO, 4.65V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1F5	-	XC6503D47AGR-G	LVR-IC	LDO, 4.75V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1F6	-	XC6503D48AGR-G	LVR-IC	LDO, 4.85V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1F7	-	XC6503D49AGR-G	LVR-IC	LDO, 4.95V±1%, 500mA, +CE	USP-4	45vm	VR4	9a	Tor
1G	-	R3117K131A	Vdet-IC	1.3V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1G	-	RP100K201B	LVR-IC	LDO, LN, 2.0V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1G	-	RP112K171B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1G	-	RP173K171A	LVR-IC	LDO, 1.7V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1H	-	R3117K141A	Vdet-IC	1.4V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1H	-	RP100K251B	LVR-IC	LDO, LN, 2.5V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1H	-	RP112K181B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1H	-	RP173K181A	LVR-IC	LDO, 1.8V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1H	-	XC6217C1727R-G	LVR-IC	LDO, 1.7V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1H	-	XC6223B2619R-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1H	-	XC6224A24B7R	LVR-IC	LDO, 2.45V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
1H	-	XC6229D34B1R-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1i	-	BU31UA3WNVX	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
1J	-	R3117K151A	Vdet-IC	1.5V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1J	-	RP100K261B	LVR-IC	LDO, LN, 2.6V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1J	-	RP112K181B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1J	-	RP173K181A5	LVR-IC	LDO, 1.5V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1K	-	R3117K161A	Vdet-IC	1.6V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1K	-	RP100K271B	LVR-IC	LDO, LN, 2.7V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1K	-	RP112K191B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1K	-	RP173K191A	LVR-IC	LDO, 1.9V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1K	-	XC6217C1827R-G	LVR-IC	LDO, 1.8V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1K	-	XC6223B2719R-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1K	-	XC6224A25B7R	LVR-IC	LDO, 2.55V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
1K	-	XC6229D3511R-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1K0	-	XC6233H121GR-G	LVR-IC	LVO, 1.2V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1K1	-	XC6233H131GR-G	LVR-IC	LVO, 1.3V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1K2	-	XC6233H141GR-G	LVR-IC	LVO, 1.4V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1K3	-	XC6233H151GR-G	LVR-IC	LVO, 1.5V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1K4	-	XC6233H161GR-G	LVR-IC	LVO, 1.6V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1K5	-	XC6233H171GR-G	LVR-IC	LVO, 1.7V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1K6	-	XC6233H181GR-G	LVR-IC	LVO, 1.8V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1K7	-	XC6233H191GR-G	LVR-IC	LVO, 1.9V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1K8	-	XC6233H201GR-G	LVR-IC	LVO, 2.0V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1K9	-	XC6233H211GR-G	LVR-IC	LVO, 2.1V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1KA	-	XC6233H221GR-G	LVR-IC	LVO, 2.2V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1KB	-	XC6233H231GR-G	LVR-IC	LVO, 2.3V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1KC	-	XC6233H241GR-G	LVR-IC	LVO, 2.4V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1KD	-	XC6233H251GR-G	LVR-IC	LVO, 2.5V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1KE	-	XC6233H261GR-G	LVR-IC	LVO, 2.6V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1KF	-	XC6233H271GR-G	LVR-IC	LVO, 2.7V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1KH	-	XC6233H281GR-G	LVR-IC	LVO, 2.8V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1KK	-	XC6233H291GR-G	LVR-IC	LVO, 2.9V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1KL	-	XC6233H301GR-G	LVR-IC	LVO, 3.0V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1KM	-	XC6233H311GR-G	LVR-IC	LVO, 3.1V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1KN	-	XC6233H321GR-G	LVR-IC	LVO, 3.2V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1KP	-	XC6233H331GR-G	LVR-IC	LVO, 3.3V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1KR	-	XC6233H341GR-G	LVR-IC	LVO, 3.4V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1KS	-	XC6233H351GR-G	LVR-IC	LVO, 3.5V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1KT	-	XC6233H361GR-G	LVR-IC	LVO, 3.6V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1L	-	R3117K171A	Vdet-IC	1.7V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1L	-	RP100K281B	LVR-IC	LDO, LN, 2.8V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1L	-	RP112K201B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1L	-	RP173K201A	LVR-IC	LDO, 2.0V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1L	-	XC6217C1927R-G	LVR-IC	LDO, 1.9V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1L	-	XC6223B2819R-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1L	-	XC6224A26B7R	LVR-IC	LDO, 2.65V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
1L	-	XC6229D35B1R-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1M	-	R3117K181A	Vdet-IC	1.8V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1M	-	RP100K281B5	LVR-IC	LDO, LN, 2.85V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1M	-	RP112K211B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1M	-	RP173K211A	LVR-IC	LDO, 2.1V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1M	-	XC6217C2027R-G	LVR-IC	LDO, 2.0V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1M	-	XC6223B2919R-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1M	-	XC6224A27B7R	LVR-IC	LDO, 2.75V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
1M	-	XC6229D3611R-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1M0	-	XC6233H12BGR-G	LVR-IC	LVO, 1.25V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1M1	-	XC6233H13BGR-G	LVR-IC	LVO, 1.35V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1M2	-	XC6233H14BGR-G	LVR-IC	LVO, 1.45V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1M3	-	XC6233H15BGR-G	LVR-IC	LVO, 1.55V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1M4	-	XC6233H16BGR-G	LVR-IC	LVO, 1.65V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1M5	-	XC6233H17BGR-G	LVR-IC	LVO, 1.75V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1M6	-	XC6233H18BGR-G	LVR-IC	LVO, 1.85V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1M7	-	XC6233H19BGR-G	LVR-IC	LVO, 1.95V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1M8	-	XC6233H20BGR-G	LVR-IC	LVO, 2.05V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1M9	-	XC6233H21BGR-G	LVR-IC	LVO, 2.15V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1MA	-	XC6233H22BGR-G	LVR-IC	LVO, 2.25V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1MB	-	XC6233H23BGR-G	LVR-IC	LVO, 2.35V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1MC	-	XC6233H24BGR-G	LVR-IC	LVO, 2.45V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1MD	-	XC6233H25BGR-G	LVR-IC	LVO, 2.55V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1ME	-	XC6233H26BGR-G	LVR-IC	LVO, 2.65V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1MF	-	XC6233H27BGR-G	LVR-IC	LVO, 2.75V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1MH	-	XC6233H28BGR-G	LVR-IC	LVO, 2.85V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1MK	-	XC6233H29BGR-G	LVR-IC	LVO, 2.95V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1ML	-	XC6233H30BGR-G	LVR-IC	LVO, 3.05V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1MM	-	XC6233H31BGR-G	LVR-IC	LVO, 3.15V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1MN	-	XC6233H32BGR-G	LVR-IC	LVO, 3.25V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1MP	-	XC6233H33BGR-G	LVR-IC	LVO, 3.35V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1MR	-	XC6233H34BGR-G	LVR-IC	LVO, 3.45V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1MS	-	XC6233H35BGR-G	LVR-IC	LVO, 3.55V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
1N	-	2SC5839	Si-npn	RF, LN, 9V, 30mA, 100mW, B=100..160, 10GHz	ML3-N2	22ta	-	2b	Pan
1N	-	R3117K191A	Vdet-IC	1.9V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1N	-	RP100K291B	LVR-IC	LDO, LN, 2.9V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1N	-	RP112K221B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1N	-	RP173K221A	LVR-IC	LDO, 2.2V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1N	-	XC6217C2127R-G	LVR-IC	LDO, 2.1V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1N	-	XC6223B3019R-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1N	-	XC6224A28B7R	LVR-IC	LDO, 2.85V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
1N	-	XC6229D36B1R-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1P	-	R3117K201A	Vdet-IC	2V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1P	-	RP100K301B	LVR-IC	LDO, LN, 3.0V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1P	-	RP112K231B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1P	-	RP173K231A	LVR-IC	LDO, 2.3V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1P	-	UNRF1A1	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=10k/10k	ML3	22ta	-	2b	Pan
1P	-	XC6217C2227R-G	LVR-IC	LDO, 2.2V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1P	-	XC6223B3119R-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1P	-	XC6224A29B7R	LVR-IC	LDO, 2.95V±1.5%, 150mA, +CE	USPN-4B02	58vm	VR4	9e	Tor
1P	-	XC6229D3711R-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1Q	-	R3117K211A	Vdet-IC	2.1V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1Q	-	RP100K311B	LVR-IC	LDO, LN, 3.1V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1Q	-	RP112K241B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1Q	-	RP173K241A	LVR-IC	LDO, 2.4V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1R	-	R3117K221A	Vdet-IC	2.2V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1R	-	RP100K331B	LVR-IC	LDO, LN, 3.3V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1R	-	RP112K251B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1R	-	RP173K251A	LVR-IC	LDO, 2.5V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1R	-	UNRF1A0	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1=47k	ML3	22ta	-	2b	Pan
1R	-	XC6217C2327R-G	LVR-IC	LDO, 2.3V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1R	-	XC6223B3219R-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1R	-	XC6229D37B1R-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1S	-	R3117K231A	Vdet-IC	2.3V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1S	-	RP100K211B	LVR-IC	LDO, LN, 2.1V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1S	-	RP112K261B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1S	-	RP173K261A	LVR-IC	LDO, 2.6V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1S	-	UNRF1AM	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=2k2/47k	ML3	22ta	-	2b	Pan
1S	-	UNRF1AT	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=22k/47k	ML3	22ta	-	2b	Pan
1S	-	XC6217C2427R-G	LVR-IC	LDO, 2.4V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1S	-	XC6223B3319R-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1S	-	XC6229D3811R-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1T	-	R3117K241A	Vdet-IC	2.4V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1T	-	RP100K121B5	LVR-IC	LDO, LN, 1.25V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1T	-	RP112K271B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
1T	-	RP173K271A	LVR-IC	LDO, 2.7V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1T	-	UNRF2A1	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=10k/10k	ML3	22ta	-	2b	Pan
1T	-	XC6217C2527R-G	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1T	-	XC6223B3419R-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1T	-	XC6229D38B1R-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1U	-	R3117K251A	Vdet-IC	2.5V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1U	-	RP100K241B	LVR-IC	LDO, LN, 2.4V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1U	-	RP112K281B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1U	-	RP173K281A	LVR-IC	LDO, 2.8V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1U	-	XC6217C2627R-G	LVR-IC	LDO, 2.6V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1U	-	XC6223B3519R-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1U	-	XC6229D3911R-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1V	-	R3117K261A	Vdet-IC	2.6V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1V	-	RP100K221B	LVR-IC	LDO, LN, 2.2V±0.8%, 200mA, +CE	PLP1612-4	45vm	VR4	9a	Ric
1V	-	RP112K281B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1V	-	RP173K281A5	LVR-IC	LDO, 2.85V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1V	-	XC6217C2727R-G	LVR-IC	LDO, 2.7V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1V	-	XC6223B3619R-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1V	-	XC6229D39B1R-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1W	-	R3117K271A	Vdet-IC	2.7V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1W	-	RP112K291B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1W	-	RP173K291A	LVR-IC	LDO, 2.9V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1W	-	UNRF2A3	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=47k/47k	ML3	22ta	-	2b	Pan
1X	-	R3117K281A	Vdet-IC	2.8V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1X	-	RP112K301B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1X	-	RP173K301A	LVR-IC	LDO, 3.0V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1X	-	UNRF2A5	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1=10k	ML3	22ta	-	2b	Pan
1X	-	XC6217C2827R-G	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1X	-	XC6223B3719R-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1X	-	XC6229D4011R-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE	BGA-4	63ba*	VR4	9a	Tor
1Y	-	R3117K291A	Vdet-IC	2.9V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1Y	-	RP112K311B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1Y	-	RP173K311A	LVR-IC	LDO, 3.1V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1Y	-	UNRF2A6	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1=4k7	ML3	22ta	-	2b	Pan
1Y	-	XC6217C2927R-G	LVR-IC	LDO, 2.9V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1Y	-	XC6223B3819R-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
1Z	-	R3117K301A	Vdet-IC	3.0V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
1Z	-	RP112K321B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
1Z	-	RP173K321A	LVR-IC	LDO, 3.2V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
1Z	-	UNRF2A7	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1=22k	ML3	22ta	-	2b	Pan
1Z	-	XC6217C3027R-G	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
1Z	-	XC6223B3919R-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
2	-	MA4L728	Si-diode	SBD Sw, 30V, 30mA, Vf<1V(30mA), 1.5pF	ML4-N1	31en	-	2b	Pan
20	-	RP110L261B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
20	-	XC6217C3127R-G	LVR-IC	LDO, 3.1V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
20	-	XC6224B0817R	LVR-IC	LDO, 0.8V±20mV, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
20	-	XC6229H1211R-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
20	-	XC6420AB207R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/2.50V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
20	-	XC6420AB20DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/2.50V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
2000D1	-	TPA2000D1GQC	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 2W(5V/4Ω)	BGA-48	39	-	9a	Ti
2001D1	-	TPA2001D1GQC	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 1W(5V/8Ω)	BGA-48	39	-	9a	Ti
2004	-	PT2004	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x2.2W(5V/4Ω), shutdown	BGA-16	39	AFP46	9a	Pct
2004	-	PT2004L	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x2.2W(5V/4Ω), shutdown	BGA-16	39	AFP46	9a	Pct
2005A	-	EUA2005J	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 1.5W(5V/8Ω), shutdown	DFN-8	92	AFP24	9a	Eut
2010	-	AZAU2010	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 2.9W(5V/8Ω), shutdown	BGA-9	39	AFP45	9a	Amz
2010A	-	EUA2010J	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/8Ω), shutdown	DFN-8	92	-	9a	Eut
2010B	-	EUA2010BJ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/4Ω), shutdown	DFN-8	92	AFP24	9a	Eut
2011	-	AZAD2010	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 2.9W(5V/8Ω), shutdown	BGA-9	39	AFP45	9a	Amz
2011A	-	EUA2011AJ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.5W(5V/4Ω), shutdown	DFN-8	92	AFP24	9a	Eut
201A	-	ISL99201IIAZ	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 1.5W(5V/8Ω), shutdown	BGA-9	39	AFP62	9m	Isl
201A	-	ISL99201IRTAZ	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 1.5W(5V/8Ω), shutdown	TDFN-8	37	AFP61	9m	Isl
201B	-	ISL99201IIBZ	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 1.5W(5V/8Ω), shutdown	BGA-9	39	AFP62	9m	Isl
201B	-	ISL99201IRTBZ	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 1.5W(5V/8Ω), shutdown	TDFN-8	37	AFP61	9m	Isl
201C	-	ISL99201IICZ	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 1.5W(5V/8Ω), shutdown	BGA-9	39	AFP62	9m	Isl
201C	-	ISL99201IRTCZ	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 1.5W(5V/8Ω), shutdown	TDFN-8	37	AFP61	9m	Isl
201D	-	ISL99201IIDZ	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 1.5W(5V/8Ω), shutdown	BGA-9	39	AFP62	9m	Isl
201D	-	ISL99201IRTDZ	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 1.5W(5V/8Ω), shutdown	TDFN-8	37	AFP61	9m	Isl
202A	-	ISL99202IIAZ	Lin-IC	AF PA, 2.4..5.5V, 2x70mW(5V/16Ω), shutdown	BGA-12	39	-	9m	Isl
202A	-	ISL99202IRTAZ	Lin-IC	AF PA, 2.4..5.5V, 2x70mW(5V/16Ω), shutdown	TQFN-12	38a5	-	9m	Isl
202B	-	ISL99202IIBZ	Lin-IC	AF PA, 2.4..5.5V, 2x70mW(5V/16Ω), shutdown	BGA-12	39	-	9m	Isl

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
202B	-	ISL99202IRTBZ	Lin-IC	AF PA, 2.4..5.5V, 2x70mW(5V/16Ω), shutdown	TQFN-12	38a5	-	9m	Isl
20M	-	XC6216B202ER	LVR-IC	2.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
20N	-	XC6216B212ER	LVR-IC	2.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
20P	-	XC6216B222ER	LVR-IC	2.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
20R	-	XC6216B232ER	LVR-IC	2.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
20S	-	XC6216B242ER	LVR-IC	2.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
20T	-	XC6216B252ER	LVR-IC	2.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
20U	-	XC6216B262ER	LVR-IC	2.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
20V	-	XC6216B272ER	LVR-IC	2.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
20X	-	XC6216B282ER	LVR-IC	2.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
20Y	-	XC6216B292ER	LVR-IC	2.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
20Z	-	XC6216B302ER	LVR-IC	3.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21	-	RP110L271B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
21	-	RT9101CWSC	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 2.65W(5V/8Ω), shutdown	BGA-8A	39	-	9a	Rct
21	-	TS4621EIJT	Lin-IC	AF PA, 1.5..4.5V, 2x50mW(3V/32Ω), I2C	BGA-16	39	-	9p	Ste
21	-	XC6217C3227R-G	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
21	-	XC6224B0917R	LVR-IC	LDO, 0.9V±20mV, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
21	-	XC6229H12B1R-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
21	-	XC6420AB217R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/2.80V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
21	-	XC6420AB21DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/2.80V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
210	-	XC6216B312ER	LVR-IC	3.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
2102	-	AZAD2102B	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 3.1W(5V/8Ω), shutdown	BGA-9	39	-	9a	Amz
211	-	XC6216B322ER	LVR-IC	3.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
212	-	XC6216B332ER	LVR-IC	3.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
213	-	XC6216B342ER	LVR-IC	3.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
2131	-	TA2131FLG	Lin-IC	AF PA, 1.5..4.5V, 2x8mW(3V/32Ω)	QFN-24	38	-	9m	Tos
214	-	XC6216B352ER	LVR-IC	3.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
215	-	XC6216B362ER	LVR-IC	3.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
216	-	XC6216B372ER	LVR-IC	3.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
217	-	XC6216B382ER	LVR-IC	3.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
218	-	XC6216B392ER	LVR-IC	3.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
219	-	XC6216B402ER	LVR-IC	4.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21A	-	AP6213A-4HNHFGU	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21A	-	AP6213A-4HNHFPU	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
21A	-	XC6216B412ER	LVR-IC	4.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21A	mf	AP6213A-09NHFGU	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21A	mf	AP6213A-09NHFPU	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
21A	mg	AP6213A-4HNHFGU1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21A	mg	AP6213A-4HNHFPU1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
21A	mj	AP6213A-09NHFGU1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21A	mj	AP6213A-09NHFPU1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
21B	-	AP6213A-4HNLFGU	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21B	-	AP6213A-4HNLFPU	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
21B	-	XC6216B422ER	LVR-IC	4.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21B	mf	AP6213A-09NLFGU	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21B	mf	AP6213A-09NLFPU	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
21B	mg	AP6213A-4HNLFGU1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21B	mg	AP6213A-4HNLFPU1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
21B	mj	AP6213A-09NLFGU1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21B	mj	AP6213A-09NLFPU1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
21C	-	AP6213A-4HNHNGU	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21C	-	AP6213A-4HNHNPU	LVR-IC	LDO, 4.75V±2%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
21C	-	XC6216B432ER	LVR-IC	4.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21C	mf	AP6213A-09NHNGU	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21C	mf	AP6213A-09NHNPU	LVR-IC	LDO, 0.9V±2%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
21C	mg	AP6213A-4HNHNGU1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21C	mg	AP6213A-4HNHNPU1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
21C	mj	AP6213A-09NHNGU1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21C	mj	AP6213A-09NHNPU1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
21D	-	AP6213A-4HNLNGU	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21D	-	AP6213A-4HNLNPU	LVR-IC	LDO, 4.75V±2%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
21D	-	XC6216B442ER	LVR-IC	4.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21D	mf	AP6213A-09NLNGU	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21D	mf	AP6213A-09NLNPU	LVR-IC	LDO, 0.9V±2%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
21D	mg	AP6213A-4HNLNGU1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21D	mg	AP6213A-4HNLNPU1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
21D	mj	AP6213A-09NLNGU1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21D	mj	AP6213A-09NLNPU1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
21E	-	AP6213A-4HUHFGU	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21E	-	AP6213A-4HUHFPU	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
21E	-	XC6216B452ER	LVR-IC	4.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21E	mf	AP6213A-09UHFGU	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21E	mf	AP6213A-09UHFPU	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
21E	mg	AP6213A-4HUHFGU1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21E	mg	AP6213A-4HUHFPU1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
21E	mj	AP6213A-09UHFGU1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21E	mj	AP6213A-09UHFPU1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
21F	-	AP6213A-4HULFGU	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21F	-	AP6213A-4HULFPU	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
21F	-	XC6216B462ER	LVR-IC	4.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21F	mf	AP6213A-09ULFGU	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21F	mf	AP6213A-09ULFPU	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
21F	mg	AP6213A-4HULFGU1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21F	mg	AP6213A-4HULFPU1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
21F	mj	AP6213A-09ULFGU1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21F	mj	AP6213A-09ULFPU1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
21G	-	AP6213A-4HUHNGU	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21G	-	AP6213A-4HUHNPU	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
21G	mf	AP6213A-09UHNGU	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21G	mf	AP6213A-09UHNPU	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
21G	mg	AP6213A-4HUHNGU1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21G	mg	AP6213A-4HUHNPU1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
21G	mj	AP6213A-09UHNGU1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21G	mj	AP6213A-09UHNPU1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
21H	-	AP6213A-4HULNGU	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21H	-	AP6213A-4HULNPU	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
21H	-	XC6216B472ER	LVR-IC	4.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21H	mf	AP6213A-09ULNGU	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21H	mf	AP6213A-09ULNPU	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
21H	mg	AP6213A-4HULNGU1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21H	mg	AP6213A-4HULNPU1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
21H	mj	AP6213A-09ULNGU1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21H	mj	AP6213A-09ULNPU1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
21J	-	AP6213A-4HDHFGU	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21J	-	AP6213A-4HDHFPU	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
21J	mf	AP6213A-09DHFGU	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21J	mf	AP6213A-09DHFPU	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
21J	mg	AP6213A-4HDHFGU1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21J	mg	AP6213A-4HDHFPU1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
21J	mj	AP6213A-09DHFGU1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21J	mj	AP6213A-09DHFPU1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
21K	-	AP6213A-4HDLFGU	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21K	-	AP6213A-4HDLFPU	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
21K	-	XC6216B482ER	LVR-IC	4.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21K	mf	AP6213A-09DLFGU	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21K	mf	AP6213A-09DLFPU	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
21K	mg	AP6213A-4HDLFGU1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21K	mg	AP6213A-4HDLFPU1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
21K	mj	AP6213A-09DLFGU1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21K	mj	AP6213A-09DLFPU1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
21L	-	AP6213A-4HDHNGU	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21L	-	AP6213A-4HDHNPU	LVR-IC	LDO, 4.75V±2%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
21L	-	XC6216B492ER	LVR-IC	4.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21L	mf	AP6213A-09DHNGU	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21L	mf	AP6213A-09DHNPU	LVR-IC	LDO, 0.9V±2%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
21L	mg	AP6213A-4HDHNGU1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21L	mg	AP6213A-4HDHNPU1	LVR-IC	LDO, 4.75V±1%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
21L	mj	AP6213A-09DHNGU1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21L	mj	AP6213A-09DHNPU1	LVR-IC	LDO, 0.9V±1%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
21M	-	AP6213A-4HDLNGU	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21M	-	AP6213A-4HDLNPU	LVR-IC	LDO, 4.75V±2%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
21M	-	XC6216B502ER	LVR-IC	5.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21M	mf	AP6213A-09DLNGU	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21M	mf	AP6213A-09DLNPU	LVR-IC	LDO, 0.9V±2%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
21M	mg	AP6213A-4HDLNGU1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21M	mg	AP6213A-4HDLNPU1	LVR-IC	LDO, 4.75V±1%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
21M	mj	AP6213A-09DLNGU1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
21M	mj	AP6213A-09DLNPU1	LVR-IC	LDO, 0.9V±1%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
21N	-	XC6216B512ER	LVR-IC	5.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21P	-	XC6216B522ER	LVR-IC	5.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
21R	-	XC6216B532ER	LVR-IC	5.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21S	-	XC6216B542ER	LVR-IC	5.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21T	-	XC6216B552ER	LVR-IC	5.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21U	-	XC6216B562ER	LVR-IC	5.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21V	-	XC6216B572ER	LVR-IC	5.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21X	-	XC6216B582ER	LVR-IC	5.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21Y	-	XC6216B592ER	LVR-IC	5.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
21Z	-	XC6216B602ER	LVR-IC	6.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22	-	CHN222M1PT	Si-diode	Dual, Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	FBPT-723	17dg	-	9d	Chm
22	-	RP110L281B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
22	-	XC6217C3327R-G	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
22	-	XC6223C1219R-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
22	-	XC6224B1017R	LVR-IC	LDO, 1.0V±20mV, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
22	-	XC6229H1311R-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
22	-	XC6420AB227R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/2.85V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
22	-	XC6420AB22DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/2.85V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
220	-	XC6216B612ER	LVR-IC	6.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
2201	-	AZAD2201B	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 2x3.1W(5V/8Ω), shutdown	BGA-16	39	AFP46	9a	Amz
221	-	XC6216B622ER	LVR-IC	6.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
222	-	XC6216B632ER	LVR-IC	6.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
223	-	XC6216B642ER	LVR-IC	6.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
224	-	XC6216B652ER	LVR-IC	6.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
225	-	XC6216B662ER	LVR-IC	6.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
226	-	XC6216B672ER	LVR-IC	6.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
227	-	XC6216B682ER	LVR-IC	6.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
228	-	XC6216B692ER	LVR-IC	6.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
229	-	XC6216B702ER	LVR-IC	7.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22A	-	XC6216B712ER	LVR-IC	7.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22A	mf	AP6213A-21NHFGU	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22A	mf	AP6213A-21NHFPU	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
22A	mj	AP6213A-21NHFGU1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22A	mj	AP6213A-21NHFPU1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
22B	-	XC6216B722ER	LVR-IC	7.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22B	mf	AP6213A-21NLFGU	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22B	mf	AP6213A-21NLFPU	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
22B	mj	AP6213A-21NLFGU1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22B	mj	AP6213A-21NLFPU1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
22C	-	XC6216B732ER	LVR-IC	7.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22C	mf	AP6213A-21NHNGU	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22C	mf	AP6213A-21NHNPU	LVR-IC	LDO, 2.1V±2%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
22C	mj	AP6213A-21NHNGU1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22C	mj	AP6213A-21NHNPU1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
22D	-	XC6216B742ER	LVR-IC	7.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22D	mf	AP6213A-21NLNGU	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22D	mf	AP6213A-21NLNPU	LVR-IC	LDO, 2.1V±2%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
22D	mj	AP6213A-21NLNGU1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22D	mj	AP6213A-21NLNPU1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
22E	-	XC6216B752ER	LVR-IC	7.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22E	mf	AP6213A-21UHFGU	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22E	mf	AP6213A-21UHFPU	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
22E	mj	AP6213A-21UHFGU1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22E	mj	AP6213A-21UHFPU1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
22F	-	XC6216B762ER	LVR-IC	7.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22F	mf	AP6213A-21ULFGU	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22F	mf	AP6213A-21ULFPU	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
22F	mj	AP6213A-21ULFGU1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22F	mj	AP6213A-21ULFPU1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
22G	mf	AP6213A-21UHNGU	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22G	mf	AP6213A-21UHNPU	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
22G	mj	AP6213A-21UHNGU1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22G	mj	AP6213A-21UHNPU1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
22H	-	XC6216B772ER	LVR-IC	7.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22H	mf	AP6213A-21ULNGU	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22H	mf	AP6213A-21ULNPU	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
22H	mj	AP6213A-21ULNGU1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22H	mj	AP6213A-21ULNPU1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
22J	mf	AP6213A-21DHFGU	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22J	mf	AP6213A-21DHFPU	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
22J	mj	AP6213A-21DHFGU1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22J	mj	AP6213A-21DHFPU1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
22K	-	XC6216B782ER	LVR-IC	7.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22K	mf	AP6213A-21DLFGU	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22K	mf	AP6213A-21DLFPU	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
22K	mj	AP6213A-21DLFGU1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22K	mj	AP6213A-21DLFPU1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
22L	-	XC6216B792ER	LVR-IC	7.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22L	mf	AP6213A-21DHNGU	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22L	mf	AP6213A-21DHNPU	LVR-IC	LDO, 2.1V±2%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
22L	mj	AP6213A-21DHNGU1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22L	mj	AP6213A-21DHNPU1	LVR-IC	LDO, 2.1V±1%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
22M	-	XC6216B802ER	LVR-IC	8.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22M	mf	AP6213A-21DLNGU	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22M	mf	AP6213A-21DLNPU	LVR-IC	LDO, 2.1V±2%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
22M	mj	AP6213A-21DLNGU1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
22M	mj	AP6213A-21DLNPU1	LVR-IC	LDO, 2.1V±1%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
22N	-	XC6216B812ER	LVR-IC	8.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22P	-	XC6216B822ER	LVR-IC	8.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22R	-	XC6216B832ER	LVR-IC	8.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22S	-	XC6216B842ER	LVR-IC	8.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22T	-	XC6216B852ER	LVR-IC	8.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22U	-	XC6216B862ER	LVR-IC	8.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22V	-	XC6216B872ER	LVR-IC	8.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22X	-	XC6216B882ER	LVR-IC	8.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22Y	-	XC6216B892ER	LVR-IC	8.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
22Z	-	XC6216B902ER	LVR-IC	9.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23	-	RP110L281B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
23	-	XC6217C3427R-G	LVR-IC	LDO, 3.4V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
23	-	XC6223C1319R-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
23	-	XC6224B1117R	LVR-IC	LDO, 1.1V±20mV, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
23	-	XC6229H13B1R-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
23	-	XC6420AB237R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/1.50V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
23	-	XC6420AB23DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/1.50V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
230	-	XC6216B912ER	LVR-IC	9.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
231	-	XC6216B922ER	LVR-IC	9.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
232	-	XC6216B932ER	LVR-IC	9.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
233	-	XC6216B942ER	LVR-IC	9.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
2333	-	PT2333	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.5W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Pct
234	-	XC6216B952ER	LVR-IC	9.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
235	-	XC6216B962ER	LVR-IC	9.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
236	-	XC6216B972ER	LVR-IC	9.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
2367	-	PT2367	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), I2S/LJ/RJ, mute, shutdown	BGA-8A	39	AFP44	9a	Pct
237	-	XC6216B982ER	LVR-IC	9.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
238	-	XC6216B992ER	LVR-IC	9.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
239	-	XC6216BA02ER	LVR-IC	10.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23A	-	XC6216BA12ER	LVR-IC	10.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23B	-	XC6216BA22ER	LVR-IC	10.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23C	-	XC6216BA32ER	LVR-IC	10.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23D	-	XC6216BA42ER	LVR-IC	10.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23E	-	XC6216BA52ER	LVR-IC	10.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23F	-	XC6216BA62ER	LVR-IC	10.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23H	-	XC6216BA72ER	LVR-IC	10.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23K	-	XC6216BA82ER	LVR-IC	10.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23L	-	XC6216BA92ER	LVR-IC	10.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23M	-	XC6216BB02ER	LVR-IC	11.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23N	-	XC6216BB12ER	LVR-IC	11.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23P	-	XC6216BB22ER	LVR-IC	11.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23R	-	XC6216BB32ER	LVR-IC	11.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23S	-	XC6216BB42ER	LVR-IC	11.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23T	-	XC6216BB52ER	LVR-IC	11.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23U	-	XC6216BB62ER	LVR-IC	11.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23V	-	XC6216BB72ER	LVR-IC	11.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23X	-	XC6216BB82ER	LVR-IC	11.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23Y	-	XC6216BB92ER	LVR-IC	11.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
23Z	-	XC6216BC02ER	LVR-IC	12.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
24	-	RP110L291B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
24	-	XC6217C3527R-G	LVR-IC	LDO, 3.5V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
24	-	XC6221C12B7R	LVR-IC	LDO, 1.25V±20mV, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
24	-	XC6223C1419R-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
24	-	XC6224B1217R	LVR-IC	LDO, 1.2V±20mV, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
24	-	XC6229H1411R-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
24	-	XC6420AB247R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/3.00V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
24	-	XC6420AB24DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/3.00V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
24A	-	AP6213A-10NHFGU	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24A	-	AP6213A-10NHFPU	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
24A	mg	AP6213A-10NHFGU1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24A	mg	AP6213A-10NHFPU1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
24A2	-	MAS9124A2CA11	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	WLCSP-5	64be*	VR7	9c	Mas
24A4	-	MAS9124A4CA11	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	WLCSP-5	64be*	VR7	9c	Mas
24A6	-	MAS9124A6CA11	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	WLCSP-5	64be*	VR7	9c	Mas
24A8	-	MAS9124A8CA11	LVR-IC	LDO, 2.86V±2%, 150mA, +CE	WLCSP-5	64be*	VR7	9c	Mas
24AC	-	MAS9124ACCA11	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	WLCSP-5	64be*	VR7	9c	Mas
24B	-	AP6213A-10NLFGU	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24B	-	AP6213A-10NLFPU	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
24B	mg	AP6213A-10NLFGU1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24B	mg	AP6213A-10NLFPU1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
24C	-	AP6213A-10NHNGU	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24C	-	AP6213A-10NHNPU	LVR-IC	LDO, 1.0V±2%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
24C	mg	AP6213A-10NHNGU1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24C	mg	AP6213A-10NHNPU1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
24D	-	AP6213A-10NLNGU	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24D	-	AP6213A-10NLNPU	LVR-IC	LDO, 1.0V±2%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
24D	mg	AP6213A-10NLNGU1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24D	mg	AP6213A-10NLNPU1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
24E	-	AP6213A-10UHFGU	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24E	-	AP6213A-10UHFPU	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
24E	mg	AP6213A-10UHFGU1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24E	mg	AP6213A-10UHFPU1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
24F	-	AP6213A-10ULFGU	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24F	-	AP6213A-10ULFPU	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
24F	mg	AP6213A-10ULFGU1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24F	mg	AP6213A-10ULFPU1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
24G	-	AP6213A-10UHNGU	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24G	-	AP6213A-10UHNPU	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
24G	mg	AP6213A-10UHNGU1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24G	mg	AP6213A-10UHNPU1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
24H	-	AP6213A-10ULNGU	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24H	-	AP6213A-10ULNPU	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
24H	mg	AP6213A-10ULNGU1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24H	mg	AP6213A-10ULNPU1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
24J	-	AP6213A-10DHFGU	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24J	-	AP6213A-10DHFPU	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
24J	mg	AP6213A-10DHFGU1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24J	mg	AP6213A-10DHFPU1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
24K	-	AP6213A-10DLFGU	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24K	-	AP6213A-10DLFPU	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
24K	mg	AP6213A-10DLFGU1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24K	mg	AP6213A-10DLFPU1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
24L	-	AP6213A-10DHNGU	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24L	-	AP6213A-10DHNPU	LVR-IC	LDO, 1.0V±2%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
24L	mg	AP6213A-10DHNGU1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24L	mg	AP6213A-10DHNPU1	LVR-IC	LDO, 1.0V±1%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
24M	-	AP6213A-10DLNGU	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24M	-	AP6213A-10DLNPU	LVR-IC	LDO, 1.0V±2%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
24M	mg	AP6213A-10DLNGU1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
24M	mg	AP6213A-10DLNPU1	LVR-IC	LDO, 1.0V±1%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
24Z2	-	MAS9124A2CA12	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	WLCSP-5	64bh*	VR7	9c	Mas
24Z8	-	MAS9124A8CA12	LVR-IC	LDO, 2.86V±2%, 150mA, +CE	WLCSP-5	64bh*	VR7	9c	Mas
24Z9	-	MAS9124A9CA12	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	WLCSP-5	64bh*	VR7	9c	Mas
24ZF	-	MAS9124AFCA12	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	WLCSP-5	64bh*	VR7	9c	Mas
24ZG	-	MAS9124AGCA12	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	WLCSP-5	64bh*	VR7	9c	Mas
25	-	RP110L301B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
25	-	XC6217C3627R-G	LVR-IC	LDO, 3.6V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
25	-	XC6221C13B7R	LVR-IC	LDO, 1.35V±20mV, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
25	-	XC6223C1519R-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
25	-	XC6224B1317R	LVR-IC	LDO, 1.3V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
25	-	XC6229H14B1R-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
25	-	XC6420AB257R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/3.30V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
25	-	XC6420AB25DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.50/3.30V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
25A	-	AP6213A-12NHFGU	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25A	-	AP6213A-12NHFPU	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
25A	mg	AP6213A-12NHFGU1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25A	mg	AP6213A-12NHFPU1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
25B	-	AP6213A-12NLFGU	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25B	-	AP6213A-12NLFPU	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
25B	mg	AP6213A-12NLFGU1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25B	mg	AP6213A-12NLFPU1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
25C	-	AP6213A-12NHNGU	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25C	-	AP6213A-12NHNPU	LVR-IC	LDO, 1.2V±2%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
25C	mg	AP6213A-12NHNGU1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25C	mg	AP6213A-12NHNPU1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
25D	-	AP6213A-12NLNGU	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25D	-	AP6213A-12NLNPU	LVR-IC	LDO, 1.2V±2%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
25D	mg	AP6213A-12NLNGU1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25D	mg	AP6213A-12NLNPU1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
25E	-	AP6213A-12UHFGU	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25E	-	AP6213A-12UHFPU	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
25E	mg	AP6213A-12UHFGU1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25E	mg	AP6213A-12UHFPU1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
25F	-	AP6213A-12ULFGU	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25F	-	AP6213A-12ULFPU	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
25F	mg	AP6213A-12ULFGU1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25F	mg	AP6213A-12ULFPU1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
25G	-	AP6213A-12UHNGU	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25G	-	AP6213A-12UHNPU	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
25G	mg	AP6213A-12UHNGU1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25G	mg	AP6213A-12UHNPU1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
25H	-	AP6213A-12ULNGU	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25H	-	AP6213A-12ULNPU	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
25H	mg	AP6213A-12ULNGU1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25H	mg	AP6213A-12ULNPU1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
25J	-	AP6213A-12DHFGU	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25J	-	AP6213A-12DHFPU	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
25J	mg	AP6213A-12DHFGU1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25J	mg	AP6213A-12DHFPU1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
25K	-	AP6213A-12DLFGU	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25K	-	AP6213A-12DLFPU	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
25K	mg	AP6213A-12DLFGU1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25K	mg	AP6213A-12DLFPU1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
25L	-	AP6213A-12DHNGU	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25L	-	AP6213A-12DHNPU	LVR-IC	LDO, 1.2V±2%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
25L	mg	AP6213A-12DHNGU1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25L	mg	AP6213A-12DHNPU1	LVR-IC	LDO, 1.2V±1%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
25M	-	AP6213A-12DLNGU	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25M	-	AP6213A-12DLNPU	LVR-IC	LDO, 1.2V±2%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
25M	mg	AP6213A-12DLNGU1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
25M	mg	AP6213A-12DLNPU1	LVR-IC	LDO, 1.2V±1%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
26	-	RP110L311B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
26	-	XC6217C3727R-G	LVR-IC	LDO, 3.7V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
26	-	XC6221C14B7R	LVR-IC	LDO, 1.45V±20mV, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
26	-	XC6223C1619R-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
26	-	XC6224B1417R	LVR-IC	LDO, 1.4V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
26	-	XC6229H1511R-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
26	-	XC6420AB267R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/3.00V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
26	-	XC6420AB26DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/3.00V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
27	-	RP110L321B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
27	-	XC6217C3827R-G	LVR-IC	LDO, 3.8V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
27	-	XC6221C15B7R	LVR-IC	LDO, 1.55V±20mV, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
27	-	XC6223C1719R-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
27	-	XC6224B1517R	LVR-IC	LDO, 1.5V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
27	-	XC6229H15B1R-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
27	-	XC6420AB277R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/3.30V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
27	-	XC6420AB27DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/3.30V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
28	-	RP110L331B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
28	-	XC6217C3927R-G	LVR-IC	LDO, 3.9V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
28	-	XC6221C16B7R	LVR-IC	LDO, 1.65V±20mV, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
28	-	XC6223C1819R-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
28	-	XC6224B1617R	LVR-IC	LDO, 1.6V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
28	-	XC6229H1611R-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
28	-	XC6420AB287R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/3.00V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
28	-	XC6420AB28DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/3.00V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2811A	-	NCP2811AFC	Lin-IC	AF PA, 2.7..5V, 2x27mW(5V/32Ω), shutdown	BGA-12	39	-	9o	Ons
2811A	-	NCP2811AMT	Lin-IC	AF PA, 2.2..5.5V, 2x27mW(5V/32Ω), shutdown	QFN-12	38	-	9a	Ons
2811B	-	NCP2811BFC	Lin-IC	AF PA, 2.7..5V, 2x27mW(5V/32Ω), shutdown	BGA-12	39	-	9o	Ons
2811B	-	NCP2811BMT	Lin-IC	AF PA, 2.2..5.5V, 2x27mW(5V/32Ω), shutdown	QFN-12	38	-	9a	Ons
28A	-	AP6213A-15NHFGU	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28A	-	AP6213A-15NHFPU	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
28A	mg	AP6213A-15NHFGU1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28A	mg	AP6213A-15NHFPU1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
28B	-	AP6213A-15NLFGU	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28B	-	AP6213A-15NLFPU	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
28B	mg	AP6213A-15NLFGU1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28B	mg	AP6213A-15NLFPU1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
28C	-	AP6213A-15NHNGU	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28C	-	AP6213A-15NHNPU	LVR-IC	LDO, 1.5V±2%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
28C	mg	AP6213A-15NHNGU1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28C	mg	AP6213A-15NHNPU1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
28D	-	AP6213A-15NLNGU	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28D	-	AP6213A-15NLNPU	LVR-IC	LDO, 1.5V±2%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
28D	mg	AP6213A-15NLNGU1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28D	mg	AP6213A-15NLNPU1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
28E	-	AP6213A-15UHFGU	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28E	-	AP6213A-15UHFPU	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
28E	mg	AP6213A-15UHFGU1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28E	mg	AP6213A-15UHFPU1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
28F	-	AP6213A-15ULFGU	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28F	-	AP6213A-15ULFPU	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
28F	mg	AP6213A-15ULFGU1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28F	mg	AP6213A-15ULFPU1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
28G	-	AP6213A-15UHNGU	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28G	-	AP6213A-15UHNPU	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
28G	mg	AP6213A-15UHNGU1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28G	mg	AP6213A-15UHNPU1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
28H	-	AP6213A-15ULNGU	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28H	-	AP6213A-15ULNPU	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
28H	mg	AP6213A-15ULNGU1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28H	mg	AP6213A-15ULNPU1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
28J	-	AP6213A-15DHFGU	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28J	-	AP6213A-15DHFPU	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
28J	mg	AP6213A-15DHFGU1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28J	mg	AP6213A-15DHFPU1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
28K	-	AP6213A-15DLFGU	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28K	-	AP6213A-15DLFPU	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
28K	mg	AP6213A-15DLFGU1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28K	mg	AP6213A-15DLFPU1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
28L	-	AP6213A-15DHNGU	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28L	-	AP6213A-15DHNPU	LVR-IC	LDO, 1.5V±2%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
28L	mg	AP6213A-15DHNGU1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28L	mg	AP6213A-15DHNPU1	LVR-IC	LDO, 1.5V±1%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
28M	-	AP6213A-15DLNGU	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28M	-	AP6213A-15DLNPU	LVR-IC	LDO, 1.5V±2%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
28M	mg	AP6213A-15DLNGU1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
28M	mg	AP6213A-15DLNPU1	LVR-IC	LDO, 1.5V±1%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
29	-	LEE-29+	MMIC	RF amplifier, DC..8GHz, 13.3dB (50Ω)	FG873	36aa	A1	9b	Mc
29	-	RP110L341B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
29	-	XC6217C4027R-G	LVR-IC	LDO, 4.0V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
29	-	XC6221C17B7R	LVR-IC	LDO, 1.75V±20mV, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
29	-	XC6223C1919R-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
29	-	XC6224B1717R	LVR-IC	LDO, 1.7V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
29	-	XC6229H16B1R-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
29	-	XC6420AB297R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/1.80V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
29	-	XC6420AB29DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/1.80V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
2990	-	AUD2990CS09	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(5V/4Ω), select shutdown	BGA-9	39	-	9a	Axp
2A	-	R3117K311A	Vdet-IC	3.1V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2A	-	RP100K121D	LVR-IC	LDO, LN, 1.2V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2A	-	RP112K331B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
2A	-	RP173K331A	LVR-IC	LDO, 3.3V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2A	-	XC6221C18B7R	LVR-IC	LDO, 1.85V±20mV, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2A	-	XC6223C2019R-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2A	-	XC6224B1817R	LVR-IC	LDO, 1.8V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
2A	-	XC6229H1711R-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2A151	-	XC6365A151ER	DC-DC-IC	PWM st-down, 100kHz, 1.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A152	-	XC6365A152ER	DC-DC-IC	PWM st-down, 180kHz, 1.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A153	-	XC6365A153ER	DC-DC-IC	PWM st-down, 300kHz, 1.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A155	-	XC6365A155ER	DC-DC-IC	PWM st-down, 500kHz, 1.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A161	-	XC6365A161ER	DC-DC-IC	PWM st-down, 100kHz, 1.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A162	-	XC6365A162ER	DC-DC-IC	PWM st-down, 180kHz, 1.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A163	-	XC6365A163ER	DC-DC-IC	PWM st-down, 300kHz, 1.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A165	-	XC6365A165ER	DC-DC-IC	PWM st-down, 500kHz, 1.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A171	-	XC6365A171ER	DC-DC-IC	PWM st-down, 100kHz, 1.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A172	-	XC6365A172ER	DC-DC-IC	PWM st-down, 180kHz, 1.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A173	-	XC6365A173ER	DC-DC-IC	PWM st-down, 300kHz, 1.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A175	-	XC6365A175ER	DC-DC-IC	PWM st-down, 500kHz, 1.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A181	-	XC6365A181ER	DC-DC-IC	PWM st-down, 100kHz, 1.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A182	-	XC6365A182ER	DC-DC-IC	PWM st-down, 180kHz, 1.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A183	-	XC6365A183ER	DC-DC-IC	PWM st-down, 300kHz, 1.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A185	-	XC6365A185ER	DC-DC-IC	PWM st-down, 500kHz, 1.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A191	-	XC6365A191ER	DC-DC-IC	PWM st-down, 100kHz, 1.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A192	-	XC6365A192ER	DC-DC-IC	PWM st-down, 180kHz, 1.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A193	-	XC6365A193ER	DC-DC-IC	PWM st-down, 300kHz, 1.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A195	-	XC6365A195ER	DC-DC-IC	PWM st-down, 500kHz, 1.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A200	-	XC6372A200D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A201	-	XC6365A201ER	DC-DC-IC	PWM st-down, 100kHz, 2.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A201	-	XC6372A201D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A202	-	XC6365A202ER	DC-DC-IC	PWM st-down, 180kHz, 2.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A202	-	XC6372A202D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A203	-	XC6365A203ER	DC-DC-IC	PWM st-down, 300kHz, 2.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A205	-	XC6365A205ER	DC-DC-IC	PWM st-down, 500kHz, 2.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A210	-	XC6372A210D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A211	-	XC6365A211ER	DC-DC-IC	PWM st-down, 100kHz, 2.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A211	-	XC6372A211D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A212	-	XC6365A212ER	DC-DC-IC	PWM st-down, 180kHz, 2.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A212	-	XC6372A212D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A213	-	XC6365A213ER	DC-DC-IC	PWM st-down, 300kHz, 2.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A215	-	XC6365A215ER	DC-DC-IC	PWM st-down, 500kHz, 2.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A220	-	XC6372A220D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A221	-	XC6365A221ER	DC-DC-IC	PWM st-down, 100kHz, 2.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A221	-	XC6372A221D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A222	-	XC6365A222ER	DC-DC-IC	PWM st-down, 180kHz, 2.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A222	-	XC6372A222D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A223	-	XC6365A223ER	DC-DC-IC	PWM st-down, 300kHz, 2.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A225	-	XC6365A225ER	DC-DC-IC	PWM st-down, 500kHz, 2.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A230	-	XC6372A230D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A231	-	XC6365A231ER	DC-DC-IC	PWM st-down, 100kHz, 2.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A231	-	XC6372A231D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A232	-	XC6365A232ER	DC-DC-IC	PWM st-down, 180kHz, 2.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A232	-	XC6372A232D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A233	-	XC6365A233ER	DC-DC-IC	PWM st-down, 300kHz, 2.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A235	-	XC6365A235ER	DC-DC-IC	PWM st-down, 500kHz, 2.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A240	-	XC6372A240D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A241	-	XC6365A241ER	DC-DC-IC	PWM st-down, 100kHz, 2.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A241	-	XC6372A241D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A242	-	XC6365A242ER	DC-DC-IC	PWM st-down, 180kHz, 2.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A242	-	XC6372A242D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A243	-	XC6365A243ER	DC-DC-IC	PWM st-down, 300kHz, 2.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A245	-	XC6365A245ER	DC-DC-IC	PWM st-down, 500kHz, 2.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A250	-	XC6372A250D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A251	-	XC6365A251ER	DC-DC-IC	PWM st-down, 100kHz, 2.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A251	-	XC6372A251D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A252	-	XC6365A252ER	DC-DC-IC	PWM st-down, 180kHz, 2.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A252	-	XC6372A252D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A253	-	XC6365A253ER	DC-DC-IC	PWM st-down, 300kHz, 2.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A255	-	XC6365A255ER	DC-DC-IC	PWM st-down, 500kHz, 2.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A260	-	XC6372A260D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A261	-	XC6365A261ER	DC-DC-IC	PWM st-down, 100kHz, 2.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A261	-	XC6372A261D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A262	-	XC6365A262ER	DC-DC-IC	PWM st-down, 180kHz, 2.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A262	-	XC6372A262D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A263	-	XC6365A263ER	DC-DC-IC	PWM st-down, 300kHz, 2.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A265	-	XC6365A265ER	DC-DC-IC	PWM st-down, 500kHz, 2.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A270	-	XC6372A270D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2A271	-	XC6365A271ER	DC-DC-IC	PWM st-down, 100kHz, 2.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A271	-	XC6372A271D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A272	-	XC6365A272ER	DC-DC-IC	PWM st-down, 180kHz, 2.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A272	-	XC6372A272D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A273	-	XC6365A273ER	DC-DC-IC	PWM st-down, 300kHz, 2.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A275	-	XC6365A275ER	DC-DC-IC	PWM st-down, 500kHz, 2.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A280	-	XC6372A280D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A281	-	XC6365A281ER	DC-DC-IC	PWM st-down, 100kHz, 2.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A281	-	XC6372A281D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A282	-	XC6365A282ER	DC-DC-IC	PWM st-down, 180kHz, 2.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A282	-	XC6372A282D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A283	-	XC6365A283ER	DC-DC-IC	PWM st-down, 300kHz, 2.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A285	-	XC6365A285ER	DC-DC-IC	PWM st-down, 500kHz, 2.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A290	-	XC6372A290D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A291	-	XC6365A291ER	DC-DC-IC	PWM st-down, 100kHz, 2.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A291	-	XC6372A291D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A292	-	XC6365A292ER	DC-DC-IC	PWM st-down, 180kHz, 2.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A292	-	XC6372A292D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A293	-	XC6365A293ER	DC-DC-IC	PWM st-down, 300kHz, 2.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A295	-	XC6365A295ER	DC-DC-IC	PWM st-down, 500kHz, 2.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A300	-	XC6372A300D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A301	-	XC6365A301ER	DC-DC-IC	PWM st-down, 100kHz, 3.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A301	-	XC6372A301D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A302	-	XC6365A302ER	DC-DC-IC	PWM st-down, 180kHz, 3.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A302	-	XC6372A302D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A303	-	XC6365A303ER	DC-DC-IC	PWM st-down, 300kHz, 3.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A305	-	XC6365A305ER	DC-DC-IC	PWM st-down, 500kHz, 3.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A310	-	XC6372A310D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A311	-	XC6365A311ER	DC-DC-IC	PWM st-down, 100kHz, 3.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A311	-	XC6372A311D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A312	-	XC6365A312ER	DC-DC-IC	PWM st-down, 180kHz, 3.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A312	-	XC6372A312D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A313	-	XC6365A313ER	DC-DC-IC	PWM st-down, 300kHz, 3.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A315	-	XC6365A315ER	DC-DC-IC	PWM st-down, 500kHz, 3.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A320	-	XC6372A320D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A321	-	XC6365A321ER	DC-DC-IC	PWM st-down, 100kHz, 3.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A321	-	XC6372A321D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A322	-	XC6365A322ER	DC-DC-IC	PWM st-down, 180kHz, 3.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A322	-	XC6372A322D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A323	-	XC6365A323ER	DC-DC-IC	PWM st-down, 300kHz, 3.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A325	-	XC6365A325ER	DC-DC-IC	PWM st-down, 500kHz, 3.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A330	-	XC6372A330D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A331	-	XC6365A331ER	DC-DC-IC	PWM st-down, 100kHz, 3.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A331	-	XC6372A331D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A332	-	XC6365A332ER	DC-DC-IC	PWM st-down, 180kHz, 3.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A332	-	XC6372A332D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A333	-	XC6365A333ER	DC-DC-IC	PWM st-down, 300kHz, 3.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A335	-	XC6365A335ER	DC-DC-IC	PWM st-down, 500kHz, 3.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A340	-	XC6372A340D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A341	-	XC6365A341ER	DC-DC-IC	PWM st-down, 100kHz, 3.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A341	-	XC6372A341D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A342	-	XC6365A342ER	DC-DC-IC	PWM st-down, 180kHz, 3.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A342	-	XC6372A342D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A343	-	XC6365A343ER	DC-DC-IC	PWM st-down, 300kHz, 3.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A345	-	XC6365A345ER	DC-DC-IC	PWM st-down, 500kHz, 3.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A350	-	XC6372A350D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A351	-	XC6365A351ER	DC-DC-IC	PWM st-down, 100kHz, 3.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A351	-	XC6372A351D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A352	-	XC6365A352ER	DC-DC-IC	PWM st-down, 180kHz, 3.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A352	-	XC6372A352D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A353	-	XC6365A353ER	DC-DC-IC	PWM st-down, 300kHz, 3.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A355	-	XC6365A355ER	DC-DC-IC	PWM st-down, 500kHz, 3.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A360	-	XC6372A360D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A361	-	XC6365A361ER	DC-DC-IC	PWM st-down, 100kHz, 3.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A361	-	XC6372A361D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A362	-	XC6365A362ER	DC-DC-IC	PWM st-down, 180kHz, 3.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A362	-	XC6372A362D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A363	-	XC6365A363ER	DC-DC-IC	PWM st-down, 300kHz, 3.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A365	-	XC6365A365ER	DC-DC-IC	PWM st-down, 500kHz, 3.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A370	-	XC6372A370D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2A371	-	XC6365A371ER	DC-DC-IC	PWM st-down, 100kHz, 3.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A371	-	XC6372A371D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A372	-	XC6365A372ER	DC-DC-IC	PWM st-down, 180kHz, 3.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A372	-	XC6372A372D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A373	-	XC6365A373ER	DC-DC-IC	PWM st-down, 300kHz, 3.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A375	-	XC6365A375ER	DC-DC-IC	PWM st-down, 500kHz, 3.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A380	-	XC6372A380D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A381	-	XC6365A381ER	DC-DC-IC	PWM st-down, 100kHz, 3.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A381	-	XC6372A381D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A382	-	XC6365A382ER	DC-DC-IC	PWM st-down, 180kHz, 3.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A382	-	XC6372A382D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A383	-	XC6365A383ER	DC-DC-IC	PWM st-down, 300kHz, 3.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A385	-	XC6365A385ER	DC-DC-IC	PWM st-down, 500kHz, 3.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A390	-	XC6372A390D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A391	-	XC6365A391ER	DC-DC-IC	PWM st-down, 100kHz, 3.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A391	-	XC6372A391D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A392	-	XC6365A392ER	DC-DC-IC	PWM st-down, 180kHz, 3.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A392	-	XC6372A392D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A393	-	XC6365A393ER	DC-DC-IC	PWM st-down, 300kHz, 3.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A395	-	XC6365A395ER	DC-DC-IC	PWM st-down, 500kHz, 3.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A400	-	XC6372A400D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A401	-	XC6365A401ER	DC-DC-IC	PWM st-down, 100kHz, 4.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A401	-	XC6372A401D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A402	-	XC6365A402ER	DC-DC-IC	PWM st-down, 180kHz, 4.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A402	-	XC6372A402D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A403	-	XC6365A403ER	DC-DC-IC	PWM st-down, 300kHz, 4.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A405	-	XC6365A405ER	DC-DC-IC	PWM st-down, 500kHz, 4.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A410	-	XC6372A410D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A411	-	XC6365A411ER	DC-DC-IC	PWM st-down, 100kHz, 4.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A411	-	XC6372A411D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A412	-	XC6365A412ER	DC-DC-IC	PWM st-down, 180kHz, 4.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A412	-	XC6372A412D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A413	-	XC6365A413ER	DC-DC-IC	PWM st-down, 300kHz, 4.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A415	-	XC6365A415ER	DC-DC-IC	PWM st-down, 500kHz, 4.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A420	-	XC6372A420D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A421	-	XC6365A421ER	DC-DC-IC	PWM st-down, 100kHz, 4.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A421	-	XC6372A421D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A422	-	XC6365A422ER	DC-DC-IC	PWM st-down, 180kHz, 4.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A422	-	XC6372A422D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A423	-	XC6365A423ER	DC-DC-IC	PWM st-down, 300kHz, 4.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A425	-	XC6365A425ER	DC-DC-IC	PWM st-down, 500kHz, 4.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A430	-	XC6372A430D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A431	-	XC6365A431ER	DC-DC-IC	PWM st-down, 100kHz, 4.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A431	-	XC6372A431D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A432	-	XC6365A432ER	DC-DC-IC	PWM st-down, 180kHz, 4.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A432	-	XC6372A432D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A433	-	XC6365A433ER	DC-DC-IC	PWM st-down, 300kHz, 4.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A435	-	XC6365A435ER	DC-DC-IC	PWM st-down, 500kHz, 4.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A440	-	XC6372A440D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A441	-	XC6365A441ER	DC-DC-IC	PWM st-down, 100kHz, 4.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A441	-	XC6372A441D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A442	-	XC6365A442ER	DC-DC-IC	PWM st-down, 180kHz, 4.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A442	-	XC6372A442D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A443	-	XC6365A443ER	DC-DC-IC	PWM st-down, 300kHz, 4.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A445	-	XC6365A445ER	DC-DC-IC	PWM st-down, 500kHz, 4.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A450	-	XC6372A450D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A451	-	XC6365A451ER	DC-DC-IC	PWM st-down, 100kHz, 4.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A451	-	XC6372A451D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A452	-	XC6365A452ER	DC-DC-IC	PWM st-down, 180kHz, 4.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A452	-	XC6372A452D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A453	-	XC6365A453ER	DC-DC-IC	PWM st-down, 300kHz, 4.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A455	-	XC6365A455ER	DC-DC-IC	PWM st-down, 500kHz, 4.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A460	-	XC6372A460D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A461	-	XC6365A461ER	DC-DC-IC	PWM st-down, 100kHz, 4.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A461	-	XC6372A461D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A462	-	XC6365A462ER	DC-DC-IC	PWM st-down, 180kHz, 4.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A462	-	XC6372A462D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A463	-	XC6365A463ER	DC-DC-IC	PWM st-down, 300kHz, 4.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A465	-	XC6365A465ER	DC-DC-IC	PWM st-down, 500kHz, 4.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A470	-	XC6372A470D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2A471	-	XC6365A471ER	DC-DC-IC	PWM st-down, 100kHz, 4.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A471	-	XC6372A471D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A472	-	XC6365A472ER	DC-DC-IC	PWM st-down, 180kHz, 4.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A472	-	XC6372A472D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A473	-	XC6365A473ER	DC-DC-IC	PWM st-down, 300kHz, 4.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A475	-	XC6365A475ER	DC-DC-IC	PWM st-down, 500kHz, 4.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A480	-	XC6372A480D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A481	-	XC6365A481ER	DC-DC-IC	PWM st-down, 100kHz, 4.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A481	-	XC6372A481D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A482	-	XC6365A482ER	DC-DC-IC	PWM st-down, 180kHz, 4.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A482	-	XC6372A482D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A483	-	XC6365A483ER	DC-DC-IC	PWM st-down, 300kHz, 4.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A485	-	XC6365A485ER	DC-DC-IC	PWM st-down, 500kHz, 4.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A490	-	XC6372A490D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A491	-	XC6365A491ER	DC-DC-IC	PWM st-down, 100kHz, 4.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A491	-	XC6372A491D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A492	-	XC6365A492ER	DC-DC-IC	PWM st-down, 180kHz, 4.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A492	-	XC6372A492D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A493	-	XC6365A493ER	DC-DC-IC	PWM st-down, 300kHz, 4.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A495	-	XC6365A495ER	DC-DC-IC	PWM st-down, 500kHz, 4.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A500	-	XC6372A500D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A501	-	XC6365A501ER	DC-DC-IC	PWM st-down, 100kHz, 5.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A501	-	XC6372A501D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A502	-	XC6365A502ER	DC-DC-IC	PWM st-down, 180kHz, 5.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A502	-	XC6372A502D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A503	-	XC6365A503ER	DC-DC-IC	PWM st-down, 300kHz, 5.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A505	-	XC6365A505ER	DC-DC-IC	PWM st-down, 500kHz, 5.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A510	-	XC6372A510D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A511	-	XC6365A511ER	DC-DC-IC	PWM st-down, 100kHz, 5.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A511	-	XC6372A511D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A512	-	XC6365A512ER	DC-DC-IC	PWM st-down, 180kHz, 5.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A512	-	XC6372A512D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A513	-	XC6365A513ER	DC-DC-IC	PWM st-down, 300kHz, 5.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A515	-	XC6365A515ER	DC-DC-IC	PWM st-down, 500kHz, 5.1V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A520	-	XC6372A520D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A521	-	XC6365A521ER	DC-DC-IC	PWM st-down, 100kHz, 5.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A521	-	XC6372A521D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A522	-	XC6365A522ER	DC-DC-IC	PWM st-down, 180kHz, 5.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A522	-	XC6372A522D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A523	-	XC6365A523ER	DC-DC-IC	PWM st-down, 300kHz, 5.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A525	-	XC6365A525ER	DC-DC-IC	PWM st-down, 500kHz, 5.2V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A530	-	XC6372A530D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A531	-	XC6365A531ER	DC-DC-IC	PWM st-down, 100kHz, 5.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A531	-	XC6372A531D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A532	-	XC6365A532ER	DC-DC-IC	PWM st-down, 180kHz, 5.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A532	-	XC6372A532D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A533	-	XC6365A533ER	DC-DC-IC	PWM st-down, 300kHz, 5.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A535	-	XC6365A535ER	DC-DC-IC	PWM st-down, 500kHz, 5.3V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A540	-	XC6372A540D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A541	-	XC6365A541ER	DC-DC-IC	PWM st-down, 100kHz, 5.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A541	-	XC6372A541D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A542	-	XC6365A542ER	DC-DC-IC	PWM st-down, 180kHz, 5.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A542	-	XC6372A542D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A543	-	XC6365A543ER	DC-DC-IC	PWM st-down, 300kHz, 5.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A545	-	XC6365A545ER	DC-DC-IC	PWM st-down, 500kHz, 5.4V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A550	-	XC6372A550D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A551	-	XC6365A551ER	DC-DC-IC	PWM st-down, 100kHz, 5.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A551	-	XC6372A551D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A552	-	XC6365A552ER	DC-DC-IC	PWM st-down, 180kHz, 5.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A552	-	XC6372A552D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A553	-	XC6365A553ER	DC-DC-IC	PWM st-down, 300kHz, 5.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A555	-	XC6365A555ER	DC-DC-IC	PWM st-down, 500kHz, 5.5V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A560	-	XC6372A560D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A561	-	XC6365A561ER	DC-DC-IC	PWM st-down, 100kHz, 5.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A561	-	XC6372A561D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A562	-	XC6365A562ER	DC-DC-IC	PWM st-down, 180kHz, 5.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A562	-	XC6372A562D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A563	-	XC6365A563ER	DC-DC-IC	PWM st-down, 300kHz, 5.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A565	-	XC6365A565ER	DC-DC-IC	PWM st-down, 500kHz, 5.6V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A570	-	XC6372A570D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2A571	-	XC6365A571ER	DC-DC-IC	PWM st-down, 100kHz, 5.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A571	-	XC6372A571D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A572	-	XC6365A572ER	DC-DC-IC	PWM st-down, 180kHz, 5.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A572	-	XC6372A572D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A573	-	XC6365A573ER	DC-DC-IC	PWM st-down, 300kHz, 5.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A575	-	XC6365A575ER	DC-DC-IC	PWM st-down, 500kHz, 5.7V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A580	-	XC6372A580D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A581	-	XC6365A581ER	DC-DC-IC	PWM st-down, 100kHz, 5.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A581	-	XC6372A581D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A582	-	XC6365A582ER	DC-DC-IC	PWM st-down, 180kHz, 5.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A582	-	XC6372A582D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A583	-	XC6365A583ER	DC-DC-IC	PWM st-down, 300kHz, 5.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A585	-	XC6365A585ER	DC-DC-IC	PWM st-down, 500kHz, 5.8V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A590	-	XC6372A590D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A591	-	XC6365A591ER	DC-DC-IC	PWM st-down, 100kHz, 5.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A591	-	XC6372A591D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A592	-	XC6365A592ER	DC-DC-IC	PWM st-down, 180kHz, 5.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A592	-	XC6372A592D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A593	-	XC6365A593ER	DC-DC-IC	PWM st-down, 300kHz, 5.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A595	-	XC6365A595ER	DC-DC-IC	PWM st-down, 500kHz, 5.9V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A600	-	XC6372A600D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A601	-	XC6365A601ER	DC-DC-IC	PWM st-down, 100kHz, 6.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A601	-	XC6372A601D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A602	-	XC6365A602ER	DC-DC-IC	PWM st-down, 180kHz, 6.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A602	-	XC6372A602D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A603	-	XC6365A603ER	DC-DC-IC	PWM st-down, 300kHz, 6.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A605	-	XC6365A605ER	DC-DC-IC	PWM st-down, 500kHz, 6.0V±2.5%, 1A, +CE	USP-6C	49zo	DC7	9b	Tor
2A610	-	XC6372A610D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A611	-	XC6372A611D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A612	-	XC6372A612D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A62	-	XC6372A620D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A621	-	XC6372A621D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A622	-	XC6372A622D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A630	-	XC6372A630D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A631	-	XC6372A631D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A632	-	XC6372A632D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A640	-	XC6372A640D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A641	-	XC6372A641D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A642	-	XC6372A642D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A650	-	XC6372A650D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A651	-	XC6372A651D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A652	-	XC6372A652D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A660	-	XC6372A660D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A661	-	XC6372A661D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A662	-	XC6372A662D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A670	-	XC6372A670D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A671	-	XC6372A671D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A672	-	XC6372A672D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A680	-	XC6372A680D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A681	-	XC6372A681D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A682	-	XC6372A682D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A690	-	XC6372A690D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A691	-	XC6372A691D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A692	-	XC6372A692D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A700	-	XC6372A700D	DC-DC-IC	PWM/PFM step-up, 50kHz, 7.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A701	-	XC6372A701D	DC-DC-IC	PWM/PFM step-up, 100kHz, 7.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A702	-	XC6372A702D	DC-DC-IC	PWM/PFM step-up, 180kHz, 7.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
2A8	-	XC9235F08C0R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2A8	-	XC9235F08C4R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2A8	-	XC9235F08CER-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2A9	-	XC9235F09C0R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2A9	-	XC9235F09C4R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2A9	-	XC9235F09CER-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2AA	-	AP6213A-18NHFGU	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AA	-	AP6213A-18NHFPU	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2AA	mg	AP6213A-18NHFGU1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AA	mg	AP6213A-18NHFPU1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2AA01	-	XC6403AA01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA02	-	XC6403AA02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA03	-	XC6403AA03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2AA04	-	XC6403AA04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA05	-	XC6403AA05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA06	-	XC6403AA06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA07	-	XC6403AA07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA08	-	XC6403AA08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA09	-	XC6403AA09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA10	-	XC6403AA10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA11	-	XC6403AA11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA12	-	XC6403AA12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA13	-	XC6403AA13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA14	-	XC6403AA14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA15	-	XC6403AA15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA16	-	XC6403AA16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA17	-	XC6403AA17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA18	-	XC6403AA18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA20	-	XC6403AA20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA21	-	XC6403AA21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA22	-	XC6403AA22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA24	-	XC6403AA24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA25	-	XC6403AA25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA30	-	XC6403AA30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA31	-	XC6403AA31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA32	-	XC6403AA32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA33	-	XC6403AA33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA34	-	XC6403AA34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA80	-	XC6403AA80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA81	-	XC6403AA81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA82	-	XC6403AA82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA83	-	XC6403AA83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA84	-	XC6403AA84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA85	-	XC6403AA85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA86	-	XC6403AA86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA87	-	XC6403AA87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AA88	-	XC6403AA88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB	-	AP6213A-18NLFGU	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AB	-	AP6213A-18NLFPU	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2AB	mg	AP6213A-18NLFGU1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AB	mg	AP6213A-18NLFPU1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2AB01	-	XC6403AB01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB02	-	XC6403AB02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB03	-	XC6403AB03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB04	-	XC6403AB04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB05	-	XC6403AB05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB06	-	XC6403AB06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB07	-	XC6403AB07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB08	-	XC6403AB08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB09	-	XC6403AB09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB10	-	XC6403AB10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB11	-	XC6403AB11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB12	-	XC6403AB12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB13	-	XC6403AB13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB14	-	XC6403AB14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB15	-	XC6403AB15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB16	-	XC6403AB16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB17	-	XC6403AB17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB18	-	XC6403AB18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB20	-	XC6403AB20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB21	-	XC6403AB21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB22	-	XC6403AB22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB24	-	XC6403AB24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB25	-	XC6403AB25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB30	-	XC6403AB30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB31	-	XC6403AB31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB32	-	XC6403AB32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB33	-	XC6403AB33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB34	-	XC6403AB34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB80	-	XC6403AB80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB81	-	XC6403AB81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB82	-	XC6403AB82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB83	-	XC6403AB83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor







SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2AB84	-	XC6403AB84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB85	-	XC6403AB85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB86	-	XC6403AB86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB87	-	XC6403AB87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AB88	-	XC6403AB88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC	-	AP6213A-18NHNGU	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AC	-	AP6213A-18NHNPU	LVR-IC	LDO, 1.8V±2%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2AC	mg	AP6213A-18NHNGU1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AC	mg	AP6213A-18NHNPU1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2AC01	-	XC6403AC01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC02	-	XC6403AC02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC03	-	XC6403AC03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC04	-	XC6403AC04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC05	-	XC6403AC05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC06	-	XC6403AC06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC07	-	XC6403AC07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC08	-	XC6403AC08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC09	-	XC6403AC09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC10	-	XC6403AC10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC11	-	XC6403AC11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC12	-	XC6403AC12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC13	-	XC6403AC13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC14	-	XC6403AC14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC15	-	XC6403AC15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC16	-	XC6403AC16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC17	-	XC6403AC17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC18	-	XC6403AC18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC20	-	XC6403AC20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC21	-	XC6403AC21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC22	-	XC6403AC22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC24	-	XC6403AC24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC25	-	XC6403AC25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC30	-	XC6403AC30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC31	-	XC6403AC31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC32	-	XC6403AC32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC33	-	XC6403AC33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC34	-	XC6403AC34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC80	-	XC6403AC80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC81	-	XC6403AC81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC82	-	XC6403AC82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC83	-	XC6403AC83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC84	-	XC6403AC84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC85	-	XC6403AC85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC86	-	XC6403AC86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC87	-	XC6403AC87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AC88	-	XC6403AC88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD	-	AP6213A-18NLNGU	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AD	-	AP6213A-18NLNPU	LVR-IC	LDO, 1.8V±2%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2AD	mg	AP6213A-18NLNGU1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AD	mg	AP6213A-18NLNPU1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2AD01	-	XC6403AD01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD02	-	XC6403AD02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD03	-	XC6403AD03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD04	-	XC6403AD04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD05	-	XC6403AD05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD06	-	XC6403AD06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD07	-	XC6403AD07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD08	-	XC6403AD08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD09	-	XC6403AD09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD10	-	XC6403AD10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD11	-	XC6403AD11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD12	-	XC6403AD12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD13	-	XC6403AD13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD14	-	XC6403AD14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD15	-	XC6403AD15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD16	-	XC6403AD16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD17	-	XC6403AD17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD18	-	XC6403AD18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD20	-	XC6403AD20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD21	-	XC6403AD21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2AD22	-	XC6403AD22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD24	-	XC6403AD24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD25	-	XC6403AD25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD30	-	XC6403AD30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD31	-	XC6403AD31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD32	-	XC6403AD32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD33	-	XC6403AD33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD34	-	XC6403AD34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD80	-	XC6403AD80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD81	-	XC6403AD81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD82	-	XC6403AD82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD83	-	XC6403AD83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD84	-	XC6403AD84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD85	-	XC6403AD85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD86	-	XC6403AD86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD87	-	XC6403AD87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AD88	-	XC6403AD88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2AE	-	AP6213A-18UHFGU	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AE	-	AP6213A-18UHFPU	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2AE	mg	AP6213A-18UHFGU1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AE	mg	AP6213A-18UHFPU1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2AE01	-	XC6403AE01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE02	-	XC6403AE02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE03	-	XC6403AE03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE04	-	XC6403AE04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE05	-	XC6403AE05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE06	-	XC6403AE06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE07	-	XC6403AE07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE08	-	XC6403AE08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE09	-	XC6403AE09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE10	-	XC6403AE10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE11	-	XC6403AE11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE12	-	XC6403AE12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE13	-	XC6403AE13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE14	-	XC6403AE14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE15	-	XC6403AE15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE16	-	XC6403AE16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE17	-	XC6403AE17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE18	-	XC6403AE18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE20	-	XC6403AE20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE21	-	XC6403AE21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE22	-	XC6403AE22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE24	-	XC6403AE24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE25	-	XC6403AE25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE30	-	XC6403AE30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE31	-	XC6403AE31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE32	-	XC6403AE32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE33	-	XC6403AE33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE34	-	XC6403AE34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE80	-	XC6403AE80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE81	-	XC6403AE81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE82	-	XC6403AE82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE83	-	XC6403AE83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE84	-	XC6403AE84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE85	-	XC6403AE85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE86	-	XC6403AE86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE87	-	XC6403AE87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AE88	-	XC6403AE88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF	-	AP6213A-18ULFGU	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AF	-	AP6213A-18ULFPU	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2AF	mg	AP6213A-18ULFGU1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AF	mg	AP6213A-18ULFPU1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2AF01	-	XC6403AF01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF02	-	XC6403AF02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF03	-	XC6403AF03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF04	-	XC6403AF04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF05	-	XC6403AF05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF06	-	XC6403AF06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF07	-	XC6403AF07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF08	-	XC6403AF08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2AF09	-	XC6403AF09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF10	-	XC6403AF10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF11	-	XC6403AF11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF12	-	XC6403AF12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF13	-	XC6403AF13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF14	-	XC6403AF14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF15	-	XC6403AF15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF16	-	XC6403AF16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF17	-	XC6403AF17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF18	-	XC6403AF18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF20	-	XC6403AF20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF21	-	XC6403AF21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF22	-	XC6403AF22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF24	-	XC6403AF24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF25	-	XC6403AF25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF30	-	XC6403AF30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF31	-	XC6403AF31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF32	-	XC6403AF32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF33	-	XC6403AF33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF34	-	XC6403AF34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF80	-	XC6403AF80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF81	-	XC6403AF81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF82	-	XC6403AF82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF83	-	XC6403AF83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF84	-	XC6403AF84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF85	-	XC6403AF85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF86	-	XC6403AF86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF87	-	XC6403AF87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AF88	-	XC6403AF88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AG	-	AP6213A-18UHNGU	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AG	-	AP6213A-18UHNPU	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2AG	mg	AP6213A-18UHNGU1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AG	mg	AP6213A-18UHNPU1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2AH	-	AP6213A-18ULNGU	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AH	-	AP6213A-18ULNPU	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2AH	mg	AP6213A-18ULNGU1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AH	mg	AP6213A-18ULNPU1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2AH01	-	XC6403AH01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH02	-	XC6403AH02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH03	-	XC6403AH03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH04	-	XC6403AH04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH05	-	XC6403AH05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH06	-	XC6403AH06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH07	-	XC6403AH07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH08	-	XC6403AH08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH09	-	XC6403AH09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH10	-	XC6403AH10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH11	-	XC6403AH11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH12	-	XC6403AH12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH13	-	XC6403AH13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH14	-	XC6403AH14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH15	-	XC6403AH15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH16	-	XC6403AH16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH17	-	XC6403AH17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH18	-	XC6403AH18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH20	-	XC6403AH20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH21	-	XC6403AH21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH22	-	XC6403AH22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH24	-	XC6403AH24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH25	-	XC6403AH25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH30	-	XC6403AH30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH31	-	XC6403AH31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH32	-	XC6403AH32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH33	-	XC6403AH33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH34	-	XC6403AH34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH80	-	XC6403AH80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH81	-	XC6403AH81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH82	-	XC6403AH82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH83	-	XC6403AH83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH84	-	XC6403AH84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2AH85	-	XC6403AH85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH86	-	XC6403AH86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH87	-	XC6403AH87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AH88	-	XC6403AH88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AJ	-	AP6213A-18DHFGU	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AJ	-	AP6213A-18DHFPU	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2AJ	mg	AP6213A-18DHFGU1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AJ	mg	AP6213A-18DHFPU1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2AK	-	AP6213A-18DLFGU	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AK	-	AP6213A-18DLFPU	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2AK	mg	AP6213A-18DLFGU1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AK	mg	AP6213A-18DLFPU1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2AK01	-	XC6403AK01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK02	-	XC6403AK02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK03	-	XC6403AK03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK04	-	XC6403AK04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK05	-	XC6403AK05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK06	-	XC6403AK06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK07	-	XC6403AK07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK08	-	XC6403AK08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK09	-	XC6403AK09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK10	-	XC6403AK10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK11	-	XC6403AK11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK12	-	XC6403AK12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK13	-	XC6403AK13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK14	-	XC6403AK14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE	WLP-6B	49zx	VR15	9b	Tor
2AK15	-	XC6403AK15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK16	-	XC6403AK16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK17	-	XC6403AK17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK18	-	XC6403AK18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK20	-	XC6403AK20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK21	-	XC6403AK21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK22	-	XC6403AK22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK24	-	XC6403AK24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK25	-	XC6403AK25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK30	-	XC6403AK30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK31	-	XC6403AK31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK32	-	XC6403AK32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK33	-	XC6403AK33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK34	-	XC6403AK34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK80	-	XC6403AK80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK81	-	XC6403AK81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK82	-	XC6403AK82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK83	-	XC6403AK83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK84	-	XC6403AK84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK85	-	XC6403AK85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK86	-	XC6403AK86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK87	-	XC6403AK87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AK88	-	XC6403AK88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2AL	-	AP6213A-18DHNGU	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AL	-	AP6213A-18DHNPU	LVR-IC	LDO, 1.8V±2%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2AL	-	XC9235F0LC0R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2AL	-	XC9235F0LC4R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2AL	-	XC9235F0LCER-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2AL	mg	AP6213A-18DHNGU1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AL	mg	AP6213A-18DHNPU1	LVR-IC	LDO, 1.8V±1%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2AL01	-	XC6403AL01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL02	-	XC6403AL02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL03	-	XC6403AL03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL04	-	XC6403AL04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL05	-	XC6403AL05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL06	-	XC6403AL06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL07	-	XC6403AL07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL08	-	XC6403AL08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL09	-	XC6403AL09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL10	-	XC6403AL10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL11	-	XC6403AL11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL12	-	XC6403AL12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL13	-	XC6403AL13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL14	-	XC6403AL14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2AL15	-	XC6403AL15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL16	-	XC6403AL16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL17	-	XC6403AL17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL18	-	XC6403AL18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL20	-	XC6403AL20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL21	-	XC6403AL21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL22	-	XC6403AL22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL24	-	XC6403AL24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL25	-	XC6403AL25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL30	-	XC6403AL30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL31	-	XC6403AL31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL32	-	XC6403AL32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL33	-	XC6403AL33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL34	-	XC6403AL34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL80	-	XC6403AL80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL81	-	XC6403AL81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL82	-	XC6403AL82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL83	-	XC6403AL83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL84	-	XC6403AL84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL85	-	XC6403AL85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL86	-	XC6403AL86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL87	-	XC6403AL87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AL88	-	XC6403AL88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM	-	AP6213A-18DLNGU	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AM	-	AP6213A-18DLNPU	LVR-IC	LDO, 1.8V±2%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2AM	-	XC9235F0MC0R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2AM	-	XC9235F0MC4R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2AM	-	XC9235F0MCER-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2AM	mg	AP6213A-18DLNGU1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2AM	mg	AP6213A-18DLNPU1	LVR-IC	LDO, 1.8V±1%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2AM01	-	XC6403AM01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM02	-	XC6403AM02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM03	-	XC6403AM03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM04	-	XC6403AM04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM05	-	XC6403AM05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM06	-	XC6403AM06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM07	-	XC6403AM07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM08	-	XC6403AM08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM09	-	XC6403AM09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM10	-	XC6403AM10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM11	-	XC6403AM11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM12	-	XC6403AM12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM13	-	XC6403AM13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM14	-	XC6403AM14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM15	-	XC6403AM15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM16	-	XC6403AM16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM17	-	XC6403AM17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM18	-	XC6403AM18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM20	-	XC6403AM20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM21	-	XC6403AM21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM22	-	XC6403AM22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM24	-	XC6403AM24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM25	-	XC6403AM25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM30	-	XC6403AM30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM31	-	XC6403AM31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM32	-	XC6403AM32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM33	-	XC6403AM33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM34	-	XC6403AM34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM80	-	XC6403AM80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM81	-	XC6403AM81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM82	-	XC6403AM82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM83	-	XC6403AM83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM84	-	XC6403AM84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM85	-	XC6403AM85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM86	-	XC6403AM86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM87	-	XC6403AM87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AM88	-	XC6403AM88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN01	-	XC6403AN01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN02	-	XC6403AN02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN03	-	XC6403AN03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2AN04	-	XC6403AN04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN05	-	XC6403AN05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN06	-	XC6403AN06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN07	-	XC6403AN07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN08	-	XC6403AN08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN09	-	XC6403AN09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN10	-	XC6403AN10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN11	-	XC6403AN11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN12	-	XC6403AN12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN13	-	XC6403AN13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN14	-	XC6403AN14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN15	-	XC6403AN15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN16	-	XC6403AN16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN17	-	XC6403AN17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN18	-	XC6403AN18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN20	-	XC6403AN20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN21	-	XC6403AN21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN22	-	XC6403AN22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN24	-	XC6403AN24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN25	-	XC6403AN25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN30	-	XC6403AN30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN31	-	XC6403AN31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN32	-	XC6403AN32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN33	-	XC6403AN33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN34	-	XC6403AN34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN80	-	XC6403AN80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN81	-	XC6403AN81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN82	-	XC6403AN82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN83	-	XC6403AN83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN84	-	XC6403AN84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN85	-	XC6403AN85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN86	-	XC6403AN86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN87	-	XC6403AN87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AN88	-	XC6403AN88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP01	-	XC6403AP01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP02	-	XC6403AP02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP03	-	XC6403AP03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP04	-	XC6403AP04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP05	-	XC6403AP05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP06	-	XC6403AP06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP07	-	XC6403AP07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP08	-	XC6403AP08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP09	-	XC6403AP09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP10	-	XC6403AP10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP11	-	XC6403AP11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP12	-	XC6403AP12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP13	-	XC6403AP13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP14	-	XC6403AP14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP15	-	XC6403AP15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP16	-	XC6403AP16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP17	-	XC6403AP17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP18	-	XC6403AP18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP20	-	XC6403AP20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP21	-	XC6403AP21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP22	-	XC6403AP22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP24	-	XC6403AP24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP25	-	XC6403AP25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP30	-	XC6403AP30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP31	-	XC6403AP31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP32	-	XC6403AP32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP33	-	XC6403AP33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP34	-	XC6403AP34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP80	-	XC6403AP80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP81	-	XC6403AP81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP82	-	XC6403AP82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP83	-	XC6403AP83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP84	-	XC6403AP84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP85	-	XC6403AP85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP86	-	XC6403AP86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AP87	-	XC6403AP87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2AP88	-	XC6403AP88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2AR01	-	XC6403AR01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR02	-	XC6403AR02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR03	-	XC6403AR03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR04	-	XC6403AR04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR05	-	XC6403AR05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR06	-	XC6403AR06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR07	-	XC6403AR07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR08	-	XC6403AR08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR09	-	XC6403AR09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR10	-	XC6403AR10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR11	-	XC6403AR11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR12	-	XC6403AR12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR13	-	XC6403AR13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR14	-	XC6403AR14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR15	-	XC6403AR15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR16	-	XC6403AR16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR17	-	XC6403AR17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR18	-	XC6403AR18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR20	-	XC6403AR20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR21	-	XC6403AR21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR22	-	XC6403AR22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR24	-	XC6403AR24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR25	-	XC6403AR25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR30	-	XC6403AR30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR31	-	XC6403AR31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR32	-	XC6403AR32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR33	-	XC6403AR33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR34	-	XC6403AR34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR80	-	XC6403AR80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR81	-	XC6403AR81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR82	-	XC6403AR82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR83	-	XC6403AR83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR84	-	XC6403AR84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR85	-	XC6403AR85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR86	-	XC6403AR86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR87	-	XC6403AR87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AR88	-	XC6403AR88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS01	-	XC6403AS01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS02	-	XC6403AS02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS03	-	XC6403AS03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS04	-	XC6403AS04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS05	-	XC6403AS05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS06	-	XC6403AS06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS07	-	XC6403AS07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS08	-	XC6403AS08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS09	-	XC6403AS09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS10	-	XC6403AS10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS11	-	XC6403AS11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS12	-	XC6403AS12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS13	-	XC6403AS13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS14	-	XC6403AS14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS15	-	XC6403AS15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS16	-	XC6403AS16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS17	-	XC6403AS17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS18	-	XC6403AS18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS20	-	XC6403AS20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS21	-	XC6403AS21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS22	-	XC6403AS22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS24	-	XC6403AS24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS25	-	XC6403AS25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS30	-	XC6403AS30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS31	-	XC6403AS31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS32	-	XC6403AS32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS33	-	XC6403AS33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS34	-	XC6403AS34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS80	-	XC6403AS80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS81	-	XC6403AS81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS82	-	XC6403AS82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS83	-	XC6403AS83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2AS84	-	XC6403AS84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS85	-	XC6403AS85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS86	-	XC6403AS86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS87	-	XC6403AS87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AS88	-	XC6403AS88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT01	-	XC6403AT01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT02	-	XC6403AT02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT03	-	XC6403AT03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT04	-	XC6403AT04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT05	-	XC6403AT05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT06	-	XC6403AT06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT07	-	XC6403AT07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT08	-	XC6403AT08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT09	-	XC6403AT09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT10	-	XC6403AT10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT11	-	XC6403AT11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT12	-	XC6403AT12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT13	-	XC6403AT13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT14	-	XC6403AT14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT15	-	XC6403AT15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT16	-	XC6403AT16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT17	-	XC6403AT17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT18	-	XC6403AT18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT20	-	XC6403AT20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT21	-	XC6403AT21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT22	-	XC6403AT22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT24	-	XC6403AT24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT25	-	XC6403AT25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT30	-	XC6403AT30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT31	-	XC6403AT31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT32	-	XC6403AT32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT33	-	XC6403AT33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT34	-	XC6403AT34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT80	-	XC6403AT80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT81	-	XC6403AT81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT82	-	XC6403AT82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT83	-	XC6403AT83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT84	-	XC6403AT84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT85	-	XC6403AT85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT86	-	XC6403AT86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT87	-	XC6403AT87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AT88	-	XC6403AT88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU01	-	XC6403AU01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU02	-	XC6403AU02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU03	-	XC6403AU03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU04	-	XC6403AU04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU05	-	XC6403AU05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU06	-	XC6403AU06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU07	-	XC6403AU07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU08	-	XC6403AU08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU09	-	XC6403AU09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU10	-	XC6403AU10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU11	-	XC6403AU11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU12	-	XC6403AU12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU13	-	XC6403AU13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU14	-	XC6403AU14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU15	-	XC6403AU15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU16	-	XC6403AU16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU17	-	XC6403AU17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU18	-	XC6403AU18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU20	-	XC6403AU20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU21	-	XC6403AU21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU22	-	XC6403AU22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU24	-	XC6403AU24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU25	-	XC6403AU25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU30	-	XC6403AU30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU31	-	XC6403AU31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU32	-	XC6403AU32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU33	-	XC6403AU33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU34	-	XC6403AU34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2AU80	-	XC6403AU80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU81	-	XC6403AU81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU82	-	XC6403AU82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU83	-	XC6403AU83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU84	-	XC6403AU84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU85	-	XC6403AU85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU86	-	XC6403AU86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU87	-	XC6403AU87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2AU88	-	XC6403AU88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2B	-	R3117K321A	Vdet-IC	3.2V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2B	-	RP100K131D	LVR-IC	LDO, LN, 1.3V±0.8%, 200mA	PLP1612-4	45vm	VR4	9a	Ric
2B	-	RP112K341B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
2B	-	RP173K341A	LVR-IC	LDO, 3.4V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2B	-	XC6221C19B7R	LVR-IC	LDO, 1.95V±20mV, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2B	-	XC6223C2119R-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2B	-	XC6224B1917R	LVR-IC	LDO, 1.9V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
2B	-	XC6229H17B1R-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2B0	-	XC9235F10C0R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2B0	-	XC9235F10C4R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2B0	-	XC9235F10CER-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2B1	-	XC9235F11C0R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2B1	-	XC9235F11C4R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2B1	-	XC9235F11CER-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2B101	-	XC6365B101ER	DC-DC-IC	PWM st-down, 100kHz, Adj. 1.5..6V±2.5%, 1A, +CE	USP-6C	49zp	DC18	9b	Tor
2B102	-	XC6365B102ER	DC-DC-IC	PWM st-down, 180kHz, Adj. 1.5..6V±2.5%, 1A, +CE	USP-6C	49zp	DC18	9b	Tor
2B103	-	XC6365B103ER	DC-DC-IC	PWM st-down, 300kHz, Adj. 1.5..6V±2.5%, 1A, +CE	USP-6C	49zp	DC18	9b	Tor
2B104	-	XC6365B105ER	DC-DC-IC	PWM st-down, 500kHz, Adj. 1.5..6V±2.5%, 1A, +CE	USP-6C	49zp	DC18	9b	Tor
2B2	-	XC9235F12C0R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2B2	-	XC9235F12C4R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2B2	-	XC9235F12CER-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2B3	-	XC9235F13C0R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2B3	-	XC9235F13C4R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2B3	-	XC9235F13CER-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2B4	-	XC9235F14C0R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2B4	-	XC9235F14C4R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2B4	-	XC9235F14CER-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2B5	-	XC9235F15C0R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2B5	-	XC9235F15C4R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2B5	-	XC9235F15CER-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2B6	-	XC9235F16C0R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2B6	-	XC9235F16C4R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2B6	-	XC9235F16CER-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2B7	-	XC9235F17C0R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2B7	-	XC9235F17C4R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2B7	-	XC9235F17CER-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2B8	-	XC9235F18C0R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2B8	-	XC9235F18C4R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2B8	-	XC9235F18CER-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2B9	-	XC9235F19C0R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2B9	-	XC9235F19C4R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2B9	-	XC9235F19CER-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2BA	-	XC9235F1AC0R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2BA	-	XC9235F1AC4R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2BA	-	XC9235F1ACER-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2BA01	-	XC6403BA01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA02	-	XC6403BA02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA03	-	XC6403BA03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA04	-	XC6403BA04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA05	-	XC6403BA05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA06	-	XC6403BA06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA07	-	XC6403BA07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA08	-	XC6403BA08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA09	-	XC6403BA09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA10	-	XC6403BA10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA11	-	XC6403BA11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA12	-	XC6403BA12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA13	-	XC6403BA13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA14	-	XC6403BA14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA15	-	XC6403BA15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA16	-	XC6403BA16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2BA17	-	XC6403BA17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA18	-	XC6403BA18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA20	-	XC6403BA20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA21	-	XC6403BA21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA22	-	XC6403BA22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA24	-	XC6403BA24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA25	-	XC6403BA25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA30	-	XC6403BA30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA31	-	XC6403BA31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA32	-	XC6403BA32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA33	-	XC6403BA33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA34	-	XC6403BA34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA80	-	XC6403BA80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA81	-	XC6403BA81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA82	-	XC6403BA82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA83	-	XC6403BA83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA84	-	XC6403BA84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA85	-	XC6403BA85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA86	-	XC6403BA86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA87	-	XC6403BA87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BA88	-	XC6403BA88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB	-	XC9235F1BC0R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2BB	-	XC9235F1BC4R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2BB	-	XC9235F1BCER-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2BB01	-	XC6403BB01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB02	-	XC6403BB02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB03	-	XC6403BB03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB04	-	XC6403BB04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB05	-	XC6403BB05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB06	-	XC6403BB06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB07	-	XC6403BB07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB08	-	XC6403BB08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB09	-	XC6403BB09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB10	-	XC6403BB10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB11	-	XC6403BB11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB12	-	XC6403BB12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB13	-	XC6403BB13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB14	-	XC6403BB14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB15	-	XC6403BB15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB16	-	XC6403BB16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB17	-	XC6403BB17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB18	-	XC6403BB18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB20	-	XC6403BB20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB21	-	XC6403BB21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB22	-	XC6403BB22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB24	-	XC6403BB24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB25	-	XC6403BB25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB30	-	XC6403BB30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB31	-	XC6403BB31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB32	-	XC6403BB32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB33	-	XC6403BB33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB34	-	XC6403BB34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB80	-	XC6403BB80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB81	-	XC6403BB81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB82	-	XC6403BB82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB83	-	XC6403BB83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB84	-	XC6403BB84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB85	-	XC6403BB85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB86	-	XC6403BB86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB87	-	XC6403BB87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BB88	-	XC6403BB88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC	-	XC9235F1CC0R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2BC	-	XC9235F1CC4R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2BC	-	XC9235F1CCER-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2BC01	-	XC6403BC01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC02	-	XC6403BC02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC03	-	XC6403BC03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC04	-	XC6403BC04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC05	-	XC6403BC05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC06	-	XC6403BC06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2BC07	-	XC6403BC07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC08	-	XC6403BC08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC09	-	XC6403BC09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC10	-	XC6403BC10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC11	-	XC6403BC11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC12	-	XC6403BC12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC13	-	XC6403BC13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC14	-	XC6403BC14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC15	-	XC6403BC15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC16	-	XC6403BC16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC17	-	XC6403BC17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC18	-	XC6403BC18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC20	-	XC6403BC20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC21	-	XC6403BC21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC22	-	XC6403BC22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC24	-	XC6403BC24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC25	-	XC6403BC25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC30	-	XC6403BC30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC31	-	XC6403BC31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC32	-	XC6403BC32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC33	-	XC6403BC33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC34	-	XC6403BC34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC80	-	XC6403BC80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC81	-	XC6403BC81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC82	-	XC6403BC82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC83	-	XC6403BC83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC84	-	XC6403BC84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC85	-	XC6403BC85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC86	-	XC6403BC86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC87	-	XC6403BC87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BC88	-	XC6403BC88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD	-	XC9235F1DC0R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2BD	-	XC9235F1DC4R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2BD	-	XC9235F1DCER-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2BD01	-	XC6403BD01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD02	-	XC6403BD02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD03	-	XC6403BD03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD04	-	XC6403BD04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD05	-	XC6403BD05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD06	-	XC6403BD06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD07	-	XC6403BD07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD08	-	XC6403BD08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD09	-	XC6403BD09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD10	-	XC6403BD10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD11	-	XC6403BD11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD12	-	XC6403BD12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD13	-	XC6403BD13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD14	-	XC6403BD14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD15	-	XC6403BD15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD16	-	XC6403BD16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD17	-	XC6403BD17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD18	-	XC6403BD18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD20	-	XC6403BD20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD21	-	XC6403BD21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD22	-	XC6403BD22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD24	-	XC6403BD24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD25	-	XC6403BD25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD30	-	XC6403BD30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD31	-	XC6403BD31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD32	-	XC6403BD32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD33	-	XC6403BD33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD34	-	XC6403BD34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD80	-	XC6403BD80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD81	-	XC6403BD81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD82	-	XC6403BD82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD83	-	XC6403BD83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD84	-	XC6403BD84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD85	-	XC6403BD85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD86	-	XC6403BD86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BD87	-	XC6403BD87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2BD88	-	XC6403BD88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2BE	-	XC9235F1EC0R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2BE	-	XC9235F1EC4R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2BE	-	XC9235F1ECER-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2BE01	-	XC6403BE01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE02	-	XC6403BE02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE03	-	XC6403BE03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE04	-	XC6403BE04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE05	-	XC6403BE05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE06	-	XC6403BE06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE07	-	XC6403BE07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE08	-	XC6403BE08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE09	-	XC6403BE09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE10	-	XC6403BE10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE11	-	XC6403BE11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE12	-	XC6403BE12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE13	-	XC6403BE13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE14	-	XC6403BE14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE15	-	XC6403BE15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE16	-	XC6403BE16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE17	-	XC6403BE17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE18	-	XC6403BE18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE20	-	XC6403BE20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE21	-	XC6403BE21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE22	-	XC6403BE22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE24	-	XC6403BE24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE25	-	XC6403BE25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE30	-	XC6403BE30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE31	-	XC6403BE31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE32	-	XC6403BE32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE33	-	XC6403BE33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE34	-	XC6403BE34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE80	-	XC6403BE80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE81	-	XC6403BE81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE82	-	XC6403BE82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE83	-	XC6403BE83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE84	-	XC6403BE84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE85	-	XC6403BE85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE86	-	XC6403BE86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE87	-	XC6403BE87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BE88	-	XC6403BE88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF	-	XC9235F1FC0R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2BF	-	XC9235F1FC4R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2BF	-	XC9235F1FCER-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2BF01	-	XC6403BF01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF02	-	XC6403BF02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF03	-	XC6403BF03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF04	-	XC6403BF04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF05	-	XC6403BF05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF06	-	XC6403BF06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF07	-	XC6403BF07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF08	-	XC6403BF08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF09	-	XC6403BF09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF10	-	XC6403BF10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF11	-	XC6403BF11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF12	-	XC6403BF12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF13	-	XC6403BF13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF14	-	XC6403BF14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF15	-	XC6403BF15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF16	-	XC6403BF16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF17	-	XC6403BF17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF18	-	XC6403BF18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF20	-	XC6403BF20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF21	-	XC6403BF21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF22	-	XC6403BF22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF24	-	XC6403BF24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF25	-	XC6403BF25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF30	-	XC6403BF30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF31	-	XC6403BF31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF32	-	XC6403BF32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2BF33	-	XC6403BF33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF34	-	XC6403BF34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF80	-	XC6403BF80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF81	-	XC6403BF81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF82	-	XC6403BF82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF83	-	XC6403BF83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF84	-	XC6403BF84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF85	-	XC6403BF85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF86	-	XC6403BF86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF87	-	XC6403BF87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BF88	-	XC6403BF88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH	-	XC9235F1HC0R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2BH	-	XC9235F1HC4R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2BH	-	XC9235F1HCER-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2BH01	-	XC6403BH01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH02	-	XC6403BH02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH03	-	XC6403BH03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH04	-	XC6403BH04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH05	-	XC6403BH05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH06	-	XC6403BH06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH07	-	XC6403BH07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH08	-	XC6403BH08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH09	-	XC6403BH09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH10	-	XC6403BH10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH11	-	XC6403BH11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH12	-	XC6403BH12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH13	-	XC6403BH13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH14	-	XC6403BH14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH15	-	XC6403BH15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH16	-	XC6403BH16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH17	-	XC6403BH17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH18	-	XC6403BH18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH20	-	XC6403BH20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH21	-	XC6403BH21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH22	-	XC6403BH22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH24	-	XC6403BH24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH25	-	XC6403BH25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH30	-	XC6403BH30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH31	-	XC6403BH31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH32	-	XC6403BH32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH33	-	XC6403BH33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH34	-	XC6403BH34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH80	-	XC6403BH80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH81	-	XC6403BH81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH82	-	XC6403BH82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH83	-	XC6403BH83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH84	-	XC6403BH84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH85	-	XC6403BH85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH86	-	XC6403BH86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH87	-	XC6403BH87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BH88	-	XC6403BH88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK	-	XC9235F1KC0R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2BK	-	XC9235F1KC4R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2BK	-	XC9235F1KCER-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2BK01	-	XC6403BK01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK02	-	XC6403BK02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK03	-	XC6403BK03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK04	-	XC6403BK04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK05	-	XC6403BK05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK06	-	XC6403BK06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK07	-	XC6403BK07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK08	-	XC6403BK08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK09	-	XC6403BK09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK10	-	XC6403BK10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK11	-	XC6403BK11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK12	-	XC6403BK12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK13	-	XC6403BK13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK14	-	XC6403BK14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK15	-	XC6403BK15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK16	-	XC6403BK16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2BK17	-	XC6403BK17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK18	-	XC6403BK18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK20	-	XC6403BK20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK21	-	XC6403BK21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK22	-	XC6403BK22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK24	-	XC6403BK24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK25	-	XC6403BK25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK30	-	XC6403BK30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK31	-	XC6403BK31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK32	-	XC6403BK32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK33	-	XC6403BK33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK34	-	XC6403BK34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK80	-	XC6403BK80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK81	-	XC6403BK81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK82	-	XC6403BK82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK83	-	XC6403BK83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK84	-	XC6403BK84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK85	-	XC6403BK85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK86	-	XC6403BK86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK87	-	XC6403BK87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BK88	-	XC6403BK88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2BL	-	XC9235F1LC0R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2BL	-	XC9235F1LC4R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2BL	-	XC9235F1LCER-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2BL01	-	XC6403BL01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL02	-	XC6403BL02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL03	-	XC6403BL03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL04	-	XC6403BL04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL05	-	XC6403BL05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL06	-	XC6403BL06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL07	-	XC6403BL07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL08	-	XC6403BL08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL09	-	XC6403BL09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL10	-	XC6403BL10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL11	-	XC6403BL11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL12	-	XC6403BL12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL13	-	XC6403BL13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL14	-	XC6403BL14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL15	-	XC6403BL15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL16	-	XC6403BL16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL17	-	XC6403BL17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL18	-	XC6403BL18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL20	-	XC6403BL20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL21	-	XC6403BL21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL22	-	XC6403BL22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL24	-	XC6403BL24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL25	-	XC6403BL25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL30	-	XC6403BL30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL31	-	XC6403BL31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL32	-	XC6403BL32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL33	-	XC6403BL33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL34	-	XC6403BL34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL80	-	XC6403BL80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL81	-	XC6403BL81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL82	-	XC6403BL82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL83	-	XC6403BL83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL84	-	XC6403BL84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL85	-	XC6403BL85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL86	-	XC6403BL86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL87	-	XC6403BL87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BL88	-	XC6403BL88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM	-	XC9235F1MC0R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2BM	-	XC9235F1MC4R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2BM	-	XC9235F1MCER-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2BM01	-	XC6403BM01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM02	-	XC6403BM02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM03	-	XC6403BM03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM04	-	XC6403BM04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM05	-	XC6403BM05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM06	-	XC6403BM06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2BM07	-	XC6403BM07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM08	-	XC6403BM08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM09	-	XC6403BM09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM10	-	XC6403BM10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM11	-	XC6403BM11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM12	-	XC6403BM12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM13	-	XC6403BM13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM14	-	XC6403BM14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM15	-	XC6403BM15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM16	-	XC6403BM16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM17	-	XC6403BM17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM18	-	XC6403BM18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM20	-	XC6403BM20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM21	-	XC6403BM21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM22	-	XC6403BM22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM24	-	XC6403BM24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM25	-	XC6403BM25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM30	-	XC6403BM30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM31	-	XC6403BM31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM32	-	XC6403BM32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM33	-	XC6403BM33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM34	-	XC6403BM34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM80	-	XC6403BM80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM81	-	XC6403BM81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM82	-	XC6403BM82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM83	-	XC6403BM83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM84	-	XC6403BM84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM85	-	XC6403BM85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM86	-	XC6403BM86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM87	-	XC6403BM87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BM88	-	XC6403BM88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN01	-	XC6403BN01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN02	-	XC6403BN02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN03	-	XC6403BN03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN04	-	XC6403BN04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN05	-	XC6403BN05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN06	-	XC6403BN06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN07	-	XC6403BN07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN08	-	XC6403BN08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN09	-	XC6403BN09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN10	-	XC6403BN10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN11	-	XC6403BN11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN12	-	XC6403BN12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN13	-	XC6403BN13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN14	-	XC6403BN14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN15	-	XC6403BN15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN16	-	XC6403BN16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN17	-	XC6403BN17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN18	-	XC6403BN18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN20	-	XC6403BN20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN21	-	XC6403BN21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN22	-	XC6403BN22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN24	-	XC6403BN24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN25	-	XC6403BN25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN30	-	XC6403BN30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN31	-	XC6403BN31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN32	-	XC6403BN32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN33	-	XC6403BN33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN34	-	XC6403BN34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN80	-	XC6403BN80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN81	-	XC6403BN81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN82	-	XC6403BN82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN83	-	XC6403BN83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN84	-	XC6403BN84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN85	-	XC6403BN85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN86	-	XC6403BN86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN87	-	XC6403BN87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BN88	-	XC6403BN88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP01	-	XC6403BP01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP02	-	XC6403BP02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2BP03	-	XC6403BP03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP04	-	XC6403BP04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP05	-	XC6403BP05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP06	-	XC6403BP06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP07	-	XC6403BP07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP08	-	XC6403BP08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP09	-	XC6403BP09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP10	-	XC6403BP10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP11	-	XC6403BP11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP12	-	XC6403BP12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP13	-	XC6403BP13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP14	-	XC6403BP14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP15	-	XC6403BP15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP16	-	XC6403BP16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP17	-	XC6403BP17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP18	-	XC6403BP18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP20	-	XC6403BP20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP21	-	XC6403BP21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP22	-	XC6403BP22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP24	-	XC6403BP24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP25	-	XC6403BP25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP30	-	XC6403BP30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP31	-	XC6403BP31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP32	-	XC6403BP32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP33	-	XC6403BP33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP34	-	XC6403BP34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP80	-	XC6403BP80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP81	-	XC6403BP81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP82	-	XC6403BP82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP83	-	XC6403BP83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP84	-	XC6403BP84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP85	-	XC6403BP85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP86	-	XC6403BP86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP87	-	XC6403BP87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BP88	-	XC6403BP88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2BR01	-	XC6403BR01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR02	-	XC6403BR02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR03	-	XC6403BR03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR04	-	XC6403BR04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR05	-	XC6403BR05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR06	-	XC6403BR06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR07	-	XC6403BR07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR08	-	XC6403BR08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR09	-	XC6403BR09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR10	-	XC6403BR10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR11	-	XC6403BR11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR12	-	XC6403BR12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR13	-	XC6403BR13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR14	-	XC6403BR14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR15	-	XC6403BR15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR16	-	XC6403BR16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR17	-	XC6403BR17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR18	-	XC6403BR18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR20	-	XC6403BR20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR21	-	XC6403BR21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR22	-	XC6403BR22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR24	-	XC6403BR24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR25	-	XC6403BR25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR30	-	XC6403BR30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR31	-	XC6403BR31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR32	-	XC6403BR32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR33	-	XC6403BR33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR34	-	XC6403BR34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR80	-	XC6403BR80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR81	-	XC6403BR81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR82	-	XC6403BR82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR83	-	XC6403BR83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR84	-	XC6403BR84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR85	-	XC6403BR85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR86	-	XC6403BR86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2BR87	-	XC6403BR87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BR88	-	XC6403BR88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS01	-	XC6403BS01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS02	-	XC6403BS02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS03	-	XC6403BS03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS04	-	XC6403BS04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS05	-	XC6403BS05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS06	-	XC6403BS06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS07	-	XC6403BS07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS08	-	XC6403BS08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS09	-	XC6403BS09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS10	-	XC6403BS10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS11	-	XC6403BS11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS12	-	XC6403BS12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS13	-	XC6403BS13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS14	-	XC6403BS14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS15	-	XC6403BS15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS16	-	XC6403BS16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS17	-	XC6403BS17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS18	-	XC6403BS18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS20	-	XC6403BS20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS21	-	XC6403BS21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS22	-	XC6403BS22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS24	-	XC6403BS24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS25	-	XC6403BS25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS30	-	XC6403BS30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS31	-	XC6403BS31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS32	-	XC6403BS32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS33	-	XC6403BS33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS34	-	XC6403BS34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS80	-	XC6403BS80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS81	-	XC6403BS81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS82	-	XC6403BS82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS83	-	XC6403BS83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS84	-	XC6403BS84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS85	-	XC6403BS85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS86	-	XC6403BS86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS87	-	XC6403BS87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BS88	-	XC6403BS88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT01	-	XC6403BT01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT02	-	XC6403BT02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT03	-	XC6403BT03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT04	-	XC6403BT04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT05	-	XC6403BT05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT06	-	XC6403BT06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT07	-	XC6403BT07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT08	-	XC6403BT08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT09	-	XC6403BT09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT10	-	XC6403BT10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT11	-	XC6403BT11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT12	-	XC6403BT12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT13	-	XC6403BT13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT14	-	XC6403BT14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT15	-	XC6403BT15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT16	-	XC6403BT16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT17	-	XC6403BT17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT18	-	XC6403BT18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT20	-	XC6403BT20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT21	-	XC6403BT21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT22	-	XC6403BT22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT24	-	XC6403BT24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT25	-	XC6403BT25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT30	-	XC6403BT30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT31	-	XC6403BT31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT32	-	XC6403BT32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT33	-	XC6403BT33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT34	-	XC6403BT34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT80	-	XC6403BT80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT81	-	XC6403BT81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT82	-	XC6403BT82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2BT83	-	XC6403BT83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT84	-	XC6403BT84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT85	-	XC6403BT85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT86	-	XC6403BT86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT87	-	XC6403BT87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BT88	-	XC6403BT88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU01	-	XC6403BU01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU02	-	XC6403BU02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU03	-	XC6403BU03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU04	-	XC6403BU04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU05	-	XC6403BU05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU06	-	XC6403BU06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU07	-	XC6403BU07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU08	-	XC6403BU08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU09	-	XC6403BU09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU10	-	XC6403BU10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU11	-	XC6403BU11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU12	-	XC6403BU12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU13	-	XC6403BU13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU14	-	XC6403BU14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU15	-	XC6403BU15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU16	-	XC6403BU16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU17	-	XC6403BU17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU18	-	XC6403BU18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU20	-	XC6403BU20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU21	-	XC6403BU21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU22	-	XC6403BU22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU24	-	XC6403BU24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU25	-	XC6403BU25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU30	-	XC6403BU30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU31	-	XC6403BU31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU32	-	XC6403BU32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU33	-	XC6403BU33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU34	-	XC6403BU34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU80	-	XC6403BU80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU81	-	XC6403BU81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU82	-	XC6403BU82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU83	-	XC6403BU83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU84	-	XC6403BU84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU85	-	XC6403BU85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU86	-	XC6403BU86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU87	-	XC6403BU87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2BU88	-	XC6403BU88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2C	-	R3117K331A	Vdet-IC	3.3V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2C	-	RP100K151D	LVR-IC	LDO, LN, 1.5V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2C	-	RP112K351B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
2C	-	RP173K351A	LVR-IC	LDO, 3.5V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2C	-	UNRF2AN	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=4k7/47k	ML3	22ta	-	2b	Pan
2C	-	XC6221C20B7R	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2C	-	XC6223C2219R-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2C	-	XC6224B2017R	LVR-IC	LDO, 2.0V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
2C	-	XC6229H1811R-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2C0	-	XC9235F20C0R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2C0	-	XC9235F20C4R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2C0	-	XC9235F20CER-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2C1	-	XC9235F21C0R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2C1	-	XC9235F21C4R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2C1	-	XC9235F21CER-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2C151	-	XC6365C151ER	DC-DC-IC	PWM st-down, 100kHz, 1.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C152	-	XC6365C152ER	DC-DC-IC	PWM st-down, 180kHz, 1.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C153	-	XC6365C153ER	DC-DC-IC	PWM st-down, 300kHz, 1.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C155	-	XC6365C155ER	DC-DC-IC	PWM st-down, 500kHz, 1.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C161	-	XC6365C161ER	DC-DC-IC	PWM st-down, 100kHz, 1.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C162	-	XC6365C162ER	DC-DC-IC	PWM st-down, 180kHz, 1.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C163	-	XC6365C163ER	DC-DC-IC	PWM st-down, 300kHz, 1.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C165	-	XC6365C165ER	DC-DC-IC	PWM st-down, 500kHz, 1.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C171	-	XC6365C171ER	DC-DC-IC	PWM st-down, 100kHz, 1.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C172	-	XC6365C172ER	DC-DC-IC	PWM st-down, 180kHz, 1.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C173	-	XC6365C173ER	DC-DC-IC	PWM st-down, 300kHz, 1.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C175	-	XC6365C175ER	DC-DC-IC	PWM st-down, 500kHz, 1.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2C181	-	XC6365C181ER	DC-DC-IC	PWM st-down, 100kHz, 1.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C182	-	XC6365C182ER	DC-DC-IC	PWM st-down, 180kHz, 1.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C183	-	XC6365C183ER	DC-DC-IC	PWM st-down, 300kHz, 1.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C185	-	XC6365C185ER	DC-DC-IC	PWM st-down, 500kHz, 1.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C191	-	XC6365C191ER	DC-DC-IC	PWM st-down, 100kHz, 1.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C192	-	XC6365C192ER	DC-DC-IC	PWM st-down, 180kHz, 1.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C193	-	XC6365C193ER	DC-DC-IC	PWM st-down, 300kHz, 1.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C195	-	XC6365C195ER	DC-DC-IC	PWM st-down, 500kHz, 1.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C2	-	XC9235F22C0R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2C2	-	XC9235F22C4R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2C2	-	XC9235F22CER-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2C200	-	XC6372C200D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C201	-	XC6365C201ER	DC-DC-IC	PWM st-down, 100kHz, 2.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C201	-	XC6372C201D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C202	-	XC6365C202ER	DC-DC-IC	PWM st-down, 180kHz, 2.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C202	-	XC6372C202D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C203	-	XC6365C203ER	DC-DC-IC	PWM st-down, 300kHz, 2.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C205	-	XC6365C205ER	DC-DC-IC	PWM st-down, 500kHz, 2.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C210	-	XC6372C210D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C211	-	XC6365C211ER	DC-DC-IC	PWM st-down, 100kHz, 2.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C211	-	XC6372C211D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C212	-	XC6365C212ER	DC-DC-IC	PWM st-down, 180kHz, 2.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C212	-	XC6372C212D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C213	-	XC6365C213ER	DC-DC-IC	PWM st-down, 300kHz, 2.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C215	-	XC6365C215ER	DC-DC-IC	PWM st-down, 500kHz, 2.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C220	-	XC6372C220D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C221	-	XC6365C221ER	DC-DC-IC	PWM st-down, 100kHz, 2.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C221	-	XC6372C221D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C222	-	XC6365C222ER	DC-DC-IC	PWM st-down, 180kHz, 2.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C222	-	XC6372C222D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C223	-	XC6365C223ER	DC-DC-IC	PWM st-down, 300kHz, 2.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C225	-	XC6365C225ER	DC-DC-IC	PWM st-down, 500kHz, 2.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C230	-	XC6372C230D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C231	-	XC6365C231ER	DC-DC-IC	PWM st-down, 100kHz, 2.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C231	-	XC6372C231D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C232	-	XC6365C232ER	DC-DC-IC	PWM st-down, 180kHz, 2.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C232	-	XC6372C232D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C233	-	XC6365C233ER	DC-DC-IC	PWM st-down, 300kHz, 2.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C235	-	XC6365C235ER	DC-DC-IC	PWM st-down, 500kHz, 2.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C240	-	XC6372C240D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C241	-	XC6365C241ER	DC-DC-IC	PWM st-down, 100kHz, 2.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C241	-	XC6372C241D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C242	-	XC6365C242ER	DC-DC-IC	PWM st-down, 180kHz, 2.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C242	-	XC6372C242D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C243	-	XC6365C243ER	DC-DC-IC	PWM st-down, 300kHz, 2.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C245	-	XC6365C245ER	DC-DC-IC	PWM st-down, 500kHz, 2.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C250	-	XC6372C250D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C251	-	XC6365C251ER	DC-DC-IC	PWM st-down, 100kHz, 2.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C251	-	XC6372C251D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C252	-	XC6365C252ER	DC-DC-IC	PWM st-down, 180kHz, 2.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C252	-	XC6372C252D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C253	-	XC6365C253ER	DC-DC-IC	PWM st-down, 300kHz, 2.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C255	-	XC6365C255ER	DC-DC-IC	PWM st-down, 500kHz, 2.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C260	-	XC6372C260D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C261	-	XC6365C261ER	DC-DC-IC	PWM st-down, 100kHz, 2.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C261	-	XC6372C261D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C262	-	XC6365C262ER	DC-DC-IC	PWM st-down, 180kHz, 2.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C262	-	XC6372C262D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C263	-	XC6365C263ER	DC-DC-IC	PWM st-down, 300kHz, 2.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C265	-	XC6365C265ER	DC-DC-IC	PWM st-down, 500kHz, 2.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C270	-	XC6372C270D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C271	-	XC6365C271ER	DC-DC-IC	PWM st-down, 100kHz, 2.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C271	-	XC6372C271D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C272	-	XC6365C272ER	DC-DC-IC	PWM st-down, 180kHz, 2.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C272	-	XC6372C272D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C273	-	XC6365C273ER	DC-DC-IC	PWM st-down, 300kHz, 2.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C275	-	XC6365C275ER	DC-DC-IC	PWM st-down, 500kHz, 2.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C280	-	XC6372C280D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C281	-	XC6365C281ER	DC-DC-IC	PWM st-down, 100kHz, 2.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C281	-	XC6372C281D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2C282	-	XC6365C282ER	DC-DC-IC	PWM st-down, 180kHz, 2.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C282	-	XC6372C282D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C283	-	XC6365C283ER	DC-DC-IC	PWM st-down, 300kHz, 2.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C285	-	XC6365C285ER	DC-DC-IC	PWM st-down, 500kHz, 2.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C290	-	XC6372C290D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C291	-	XC6365C291ER	DC-DC-IC	PWM st-down, 100kHz, 2.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C291	-	XC6372C291D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C292	-	XC6365C292ER	DC-DC-IC	PWM st-down, 180kHz, 2.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C292	-	XC6372C292D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C293	-	XC6365C293ER	DC-DC-IC	PWM st-down, 300kHz, 2.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C295	-	XC6365C295ER	DC-DC-IC	PWM st-down, 500kHz, 2.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C3	-	XC9235F23C0R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2C3	-	XC9235F23C4R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2C3	-	XC9235F23CER-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2C300	-	XC6372C300D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C301	-	XC6365C301ER	DC-DC-IC	PWM st-down, 100kHz, 3.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C301	-	XC6372C301D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C302	-	XC6365C302ER	DC-DC-IC	PWM st-down, 180kHz, 3.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C302	-	XC6372C302D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C303	-	XC6365C303ER	DC-DC-IC	PWM st-down, 300kHz, 3.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C305	-	XC6365C305ER	DC-DC-IC	PWM st-down, 500kHz, 3.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C310	-	XC6372C310D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C311	-	XC6365C311ER	DC-DC-IC	PWM st-down, 100kHz, 3.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C311	-	XC6372C311D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C312	-	XC6365C312ER	DC-DC-IC	PWM st-down, 180kHz, 3.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C312	-	XC6372C312D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C313	-	XC6365C313ER	DC-DC-IC	PWM st-down, 300kHz, 3.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C315	-	XC6365C315ER	DC-DC-IC	PWM st-down, 500kHz, 3.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C320	-	XC6372C320D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C321	-	XC6365C321ER	DC-DC-IC	PWM st-down, 100kHz, 3.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C321	-	XC6372C321D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C322	-	XC6365C322ER	DC-DC-IC	PWM st-down, 180kHz, 3.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C322	-	XC6372C322D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C323	-	XC6365C323ER	DC-DC-IC	PWM st-down, 300kHz, 3.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C325	-	XC6365C325ER	DC-DC-IC	PWM st-down, 500kHz, 3.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C330	-	XC6372C330D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C331	-	XC6365C331ER	DC-DC-IC	PWM st-down, 100kHz, 3.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C331	-	XC6372C331D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C332	-	XC6365C332ER	DC-DC-IC	PWM st-down, 180kHz, 3.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C332	-	XC6372C332D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C333	-	XC6365C333ER	DC-DC-IC	PWM st-down, 300kHz, 3.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C335	-	XC6365C335ER	DC-DC-IC	PWM st-down, 500kHz, 3.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C340	-	XC6372C340D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C341	-	XC6365C341ER	DC-DC-IC	PWM st-down, 100kHz, 3.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C341	-	XC6372C341D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C342	-	XC6365C342ER	DC-DC-IC	PWM st-down, 180kHz, 3.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C342	-	XC6372C342D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C343	-	XC6365C343ER	DC-DC-IC	PWM st-down, 300kHz, 3.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C345	-	XC6365C345ER	DC-DC-IC	PWM st-down, 500kHz, 3.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C350	-	XC6372C350D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C351	-	XC6365C351ER	DC-DC-IC	PWM st-down, 100kHz, 3.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C351	-	XC6372C351D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C352	-	XC6365C352ER	DC-DC-IC	PWM st-down, 180kHz, 3.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C352	-	XC6372C352D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C353	-	XC6365C353ER	DC-DC-IC	PWM st-down, 300kHz, 3.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C355	-	XC6365C355ER	DC-DC-IC	PWM st-down, 500kHz, 3.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C360	-	XC6372C360D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C361	-	XC6365C361ER	DC-DC-IC	PWM st-down, 100kHz, 3.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C361	-	XC6372C361D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C362	-	XC6365C362ER	DC-DC-IC	PWM st-down, 180kHz, 3.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C362	-	XC6372C362D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C363	-	XC6365C363ER	DC-DC-IC	PWM st-down, 300kHz, 3.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C365	-	XC6365C365ER	DC-DC-IC	PWM st-down, 500kHz, 3.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C370	-	XC6372C370D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C371	-	XC6365C371ER	DC-DC-IC	PWM st-down, 100kHz, 3.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C371	-	XC6372C371D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C372	-	XC6365C372ER	DC-DC-IC	PWM st-down, 180kHz, 3.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C372	-	XC6372C372D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C373	-	XC6365C373ER	DC-DC-IC	PWM st-down, 300kHz, 3.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C375	-	XC6365C375ER	DC-DC-IC	PWM st-down, 500kHz, 3.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2C380	-	XC6372C380D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C381	-	XC6365C381ER	DC-DC-IC	PWM st-down, 100kHz, 3.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C381	-	XC6372C381D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C382	-	XC6365C382ER	DC-DC-IC	PWM st-down, 180kHz, 3.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C382	-	XC6372C382D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C383	-	XC6365C383ER	DC-DC-IC	PWM st-down, 300kHz, 3.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C385	-	XC6365C385ER	DC-DC-IC	PWM st-down, 500kHz, 3.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C390	-	XC6372C390D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C391	-	XC6365C391ER	DC-DC-IC	PWM st-down, 100kHz, 3.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C391	-	XC6372C391D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C392	-	XC6365C392ER	DC-DC-IC	PWM st-down, 180kHz, 3.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C392	-	XC6372C392D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C393	-	XC6365C393ER	DC-DC-IC	PWM st-down, 300kHz, 3.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C395	-	XC6365C395ER	DC-DC-IC	PWM st-down, 500kHz, 3.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C4	-	XC9235F24C0R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2C4	-	XC9235F24C4R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2C4	-	XC9235F24CER-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2C400	-	XC6372C400D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C401	-	XC6365C401ER	DC-DC-IC	PWM st-down, 100kHz, 4.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C401	-	XC6372C401D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C402	-	XC6365C402ER	DC-DC-IC	PWM st-down, 180kHz, 4.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C402	-	XC6372C402D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C403	-	XC6365C403ER	DC-DC-IC	PWM st-down, 300kHz, 4.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C405	-	XC6365C405ER	DC-DC-IC	PWM st-down, 500kHz, 4.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C410	-	XC6372C410D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C411	-	XC6365C411ER	DC-DC-IC	PWM st-down, 100kHz, 4.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C411	-	XC6372C411D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C412	-	XC6365C412ER	DC-DC-IC	PWM st-down, 180kHz, 4.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C412	-	XC6372C412D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C413	-	XC6365C413ER	DC-DC-IC	PWM st-down, 300kHz, 4.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C415	-	XC6365C415ER	DC-DC-IC	PWM st-down, 500kHz, 4.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C420	-	XC6372C420D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C421	-	XC6365C421ER	DC-DC-IC	PWM st-down, 100kHz, 4.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C421	-	XC6372C421D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C422	-	XC6365C422ER	DC-DC-IC	PWM st-down, 180kHz, 4.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C422	-	XC6372C422D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C423	-	XC6365C423ER	DC-DC-IC	PWM st-down, 300kHz, 4.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C425	-	XC6365C425ER	DC-DC-IC	PWM st-down, 500kHz, 4.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C430	-	XC6372C430D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C431	-	XC6365C431ER	DC-DC-IC	PWM st-down, 100kHz, 4.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C431	-	XC6372C431D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C432	-	XC6365C432ER	DC-DC-IC	PWM st-down, 180kHz, 4.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C432	-	XC6372C432D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C433	-	XC6365C433ER	DC-DC-IC	PWM st-down, 300kHz, 4.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C435	-	XC6365C435ER	DC-DC-IC	PWM st-down, 500kHz, 4.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C440	-	XC6372C440D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C441	-	XC6365C441ER	DC-DC-IC	PWM st-down, 100kHz, 4.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C441	-	XC6372C441D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C442	-	XC6365C442ER	DC-DC-IC	PWM st-down, 180kHz, 4.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C442	-	XC6372C442D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C443	-	XC6365C443ER	DC-DC-IC	PWM st-down, 300kHz, 4.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C445	-	XC6365C445ER	DC-DC-IC	PWM st-down, 500kHz, 4.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C450	-	XC6372C450D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C451	-	XC6365C451ER	DC-DC-IC	PWM st-down, 100kHz, 4.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C451	-	XC6372C451D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C452	-	XC6365C452ER	DC-DC-IC	PWM st-down, 180kHz, 4.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C452	-	XC6372C452D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C453	-	XC6365C453ER	DC-DC-IC	PWM st-down, 300kHz, 4.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C455	-	XC6365C455ER	DC-DC-IC	PWM st-down, 500kHz, 4.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C460	-	XC6372C460D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C461	-	XC6365C461ER	DC-DC-IC	PWM st-down, 100kHz, 4.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C461	-	XC6372C461D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C462	-	XC6365C462ER	DC-DC-IC	PWM st-down, 180kHz, 4.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C462	-	XC6372C462D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C463	-	XC6365C463ER	DC-DC-IC	PWM st-down, 300kHz, 4.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C465	-	XC6365C465ER	DC-DC-IC	PWM st-down, 500kHz, 4.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C470	-	XC6372C470D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C471	-	XC6365C471ER	DC-DC-IC	PWM st-down, 100kHz, 4.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C471	-	XC6372C471D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C472	-	XC6365C472ER	DC-DC-IC	PWM st-down, 180kHz, 4.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2C472	-	XC6372C472D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C473	-	XC6365C473ER	DC-DC-IC	PWM st-down, 300kHz, 4.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C475	-	XC6365C475ER	DC-DC-IC	PWM st-down, 500kHz, 4.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C480	-	XC6372C480D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C481	-	XC6365C481ER	DC-DC-IC	PWM st-down, 100kHz, 4.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C481	-	XC6372C481D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C482	-	XC6365C482ER	DC-DC-IC	PWM st-down, 180kHz, 4.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C482	-	XC6372C482D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C483	-	XC6365C483ER	DC-DC-IC	PWM st-down, 300kHz, 4.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C485	-	XC6365C485ER	DC-DC-IC	PWM st-down, 500kHz, 4.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C490	-	XC6372C490D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C491	-	XC6365C491ER	DC-DC-IC	PWM st-down, 100kHz, 4.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C491	-	XC6372C491D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C492	-	XC6365C492ER	DC-DC-IC	PWM st-down, 180kHz, 4.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C492	-	XC6372C492D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C493	-	XC6365C493ER	DC-DC-IC	PWM st-down, 300kHz, 4.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C495	-	XC6365C495ER	DC-DC-IC	PWM st-down, 500kHz, 4.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C5	-	XC9235F25C0R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2C5	-	XC9235F25C4R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2C5	-	XC9235F25CER-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2C500	-	XC6372C500D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C501	-	XC6365C501ER	DC-DC-IC	PWM st-down, 100kHz, 5.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C501	-	XC6372C501D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C502	-	XC6365C502ER	DC-DC-IC	PWM st-down, 180kHz, 5.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C502	-	XC6372C502D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C503	-	XC6365C503ER	DC-DC-IC	PWM st-down, 300kHz, 5.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C505	-	XC6365C505ER	DC-DC-IC	PWM st-down, 500kHz, 5.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C510	-	XC6372C510D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C511	-	XC6365C511ER	DC-DC-IC	PWM st-down, 100kHz, 5.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C511	-	XC6372C511D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C512	-	XC6365C512ER	DC-DC-IC	PWM st-down, 180kHz, 5.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C512	-	XC6372C512D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C513	-	XC6365C513ER	DC-DC-IC	PWM st-down, 300kHz, 5.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C515	-	XC6365C515ER	DC-DC-IC	PWM st-down, 500kHz, 5.1V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C520	-	XC6372C520D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C521	-	XC6365C521ER	DC-DC-IC	PWM st-down, 100kHz, 5.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C521	-	XC6372C521D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C522	-	XC6365C522ER	DC-DC-IC	PWM st-down, 180kHz, 5.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C522	-	XC6372C522D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C523	-	XC6365C523ER	DC-DC-IC	PWM st-down, 300kHz, 5.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C525	-	XC6365C525ER	DC-DC-IC	PWM st-down, 500kHz, 5.2V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C530	-	XC6372C530D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C531	-	XC6365C531ER	DC-DC-IC	PWM st-down, 100kHz, 5.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C531	-	XC6372C531D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C532	-	XC6365C532ER	DC-DC-IC	PWM st-down, 180kHz, 5.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C532	-	XC6372C532D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C533	-	XC6365C533ER	DC-DC-IC	PWM st-down, 300kHz, 5.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C535	-	XC6365C535ER	DC-DC-IC	PWM st-down, 500kHz, 5.3V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C540	-	XC6372C540D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C541	-	XC6365C541ER	DC-DC-IC	PWM st-down, 100kHz, 5.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C541	-	XC6372C541D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C542	-	XC6365C542ER	DC-DC-IC	PWM st-down, 180kHz, 5.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C542	-	XC6372C542D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C543	-	XC6365C543ER	DC-DC-IC	PWM st-down, 300kHz, 5.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C545	-	XC6365C545ER	DC-DC-IC	PWM st-down, 500kHz, 5.4V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C550	-	XC6372C550D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C551	-	XC6365C551ER	DC-DC-IC	PWM st-down, 100kHz, 5.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C551	-	XC6372C551D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C552	-	XC6365C552ER	DC-DC-IC	PWM st-down, 180kHz, 5.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C552	-	XC6372C552D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C553	-	XC6365C553ER	DC-DC-IC	PWM st-down, 300kHz, 5.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C555	-	XC6365C555ER	DC-DC-IC	PWM st-down, 500kHz, 5.5V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C560	-	XC6372C560D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C561	-	XC6365C561ER	DC-DC-IC	PWM st-down, 100kHz, 5.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C561	-	XC6372C561D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C562	-	XC6365C562ER	DC-DC-IC	PWM st-down, 180kHz, 5.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C562	-	XC6372C562D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C563	-	XC6365C563ER	DC-DC-IC	PWM st-down, 300kHz, 5.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C565	-	XC6365C565ER	DC-DC-IC	PWM st-down, 500kHz, 5.6V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C570	-	XC6372C570D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2C571	-	XC6365C571ER	DC-DC-IC	PWM st-down, 100kHz, 5.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C571	-	XC6372C571D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C572	-	XC6365C572ER	DC-DC-IC	PWM st-down, 180kHz, 5.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C572	-	XC6372C572D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C573	-	XC6365C573ER	DC-DC-IC	PWM st-down, 300kHz, 5.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C575	-	XC6365C575ER	DC-DC-IC	PWM st-down, 500kHz, 5.7V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C580	-	XC6372C580D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C581	-	XC6365C581ER	DC-DC-IC	PWM st-down, 100kHz, 5.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C581	-	XC6372C581D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C582	-	XC6365C582ER	DC-DC-IC	PWM st-down, 180kHz, 5.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C582	-	XC6372C582D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C583	-	XC6365C583ER	DC-DC-IC	PWM st-down, 300kHz, 5.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C585	-	XC6365C585ER	DC-DC-IC	PWM st-down, 500kHz, 5.8V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C590	-	XC6372C590D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C591	-	XC6365C591ER	DC-DC-IC	PWM st-down, 100kHz, 5.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C591	-	XC6372C591D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C592	-	XC6365C592ER	DC-DC-IC	PWM st-down, 180kHz, 5.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C592	-	XC6372C592D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C593	-	XC6365C593ER	DC-DC-IC	PWM st-down, 300kHz, 5.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C595	-	XC6365C595ER	DC-DC-IC	PWM st-down, 500kHz, 5.9V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C6	-	XC9235F26C0R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2C6	-	XC9235F26C4R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2C6	-	XC9235F26CER-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2C600	-	XC6372C600D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C601	-	XC6365C601ER	DC-DC-IC	PWM st-down, 100kHz, 6.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C601	-	XC6372C601D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C602	-	XC6365C602ER	DC-DC-IC	PWM st-down, 180kHz, 6.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C602	-	XC6372C602D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C603	-	XC6365C603ER	DC-DC-IC	PWM st-down, 300kHz, 6.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C605	-	XC6365C605ER	DC-DC-IC	PWM st-down, 500kHz, 6.0V±2.5%, 1A, +CE, soft start	USP-6C	49zo	DC7	9b	Tor
2C610	-	XC6372C610D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C611	-	XC6372C611D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C612	-	XC6372C612D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C620	-	XC6372C620D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C621	-	XC6372C621D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C622	-	XC6372C622D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C630	-	XC6372C630D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C631	-	XC6372C631D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C632	-	XC6372C632D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C640	-	XC6372C640D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C641	-	XC6372C641D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C642	-	XC6372C642D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C650	-	XC6372C650D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C651	-	XC6372C651D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C652	-	XC6372C652D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C660	-	XC6372C660D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C661	-	XC6372C661D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C662	-	XC6372C662D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C670	-	XC6372C670D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C671	-	XC6372C671D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C672	-	XC6372C672D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C680	-	XC6372C680D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C681	-	XC6372C681D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C682	-	XC6372C682D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C690	-	XC6372C690D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C691	-	XC6372C691D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C692	-	XC6372C692D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C7	-	XC9235F27C0R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2C7	-	XC9235F27C4R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2C7	-	XC9235F27CER-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2C700	-	XC6372C700D	DC-DC-IC	PWM/PFM step-up, 50kHz, 7.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C701	-	XC6372C701D	DC-DC-IC	PWM/PFM step-up, 100kHz, 7.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C702	-	XC6372C702D	DC-DC-IC	PWM/PFM step-up, 180kHz, 7.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
2C8	-	XC9235F28C0R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2C8	-	XC9235F28C4R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2C8	-	XC9235F28CER-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2C9	-	XC9235F29C0R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2C9	-	XC9235F29C4R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2C9	-	XC9235F29CER-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2CA	-	XC9235F2AC0R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2CA	-	XC9235F2AC4R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2CA	-	XC9235F2ACER-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2CA01	-	XC6403CA01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA02	-	XC6403CA02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA03	-	XC6403CA03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA04	-	XC6403CA04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA05	-	XC6403CA05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA06	-	XC6403CA06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA07	-	XC6403CA07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA08	-	XC6403CA08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA09	-	XC6403CA09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA10	-	XC6403CA10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA11	-	XC6403CA11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA12	-	XC6403CA12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA13	-	XC6403CA13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA14	-	XC6403CA14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA15	-	XC6403CA15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA16	-	XC6403CA16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA17	-	XC6403CA17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA18	-	XC6403CA18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA20	-	XC6403CA20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA21	-	XC6403CA21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA22	-	XC6403CA22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA24	-	XC6403CA24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA25	-	XC6403CA25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA30	-	XC6403CA30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA31	-	XC6403CA31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA32	-	XC6403CA32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA33	-	XC6403CA33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA34	-	XC6403CA34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA80	-	XC6403CA80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA81	-	XC6403CA81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA82	-	XC6403CA82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA83	-	XC6403CA83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA84	-	XC6403CA84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA85	-	XC6403CA85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA86	-	XC6403CA86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA87	-	XC6403CA87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CA88	-	XC6403CA88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB	-	XC9235F2BC0R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2CB	-	XC9235F2BC4R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2CB	-	XC9235F2BCER-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2CB01	-	XC6403CB01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB02	-	XC6403CB02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB03	-	XC6403CB03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB04	-	XC6403CB04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB05	-	XC6403CB05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB06	-	XC6403CB06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB07	-	XC6403CB07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB08	-	XC6403CB08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB09	-	XC6403CB09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB10	-	XC6403CB10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB11	-	XC6403CB11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB12	-	XC6403CB12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB13	-	XC6403CB13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB14	-	XC6403CB14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB15	-	XC6403CB15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB16	-	XC6403CB16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB17	-	XC6403CB17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB18	-	XC6403CB18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB20	-	XC6403CB20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB21	-	XC6403CB21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB22	-	XC6403CB22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB24	-	XC6403CB24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB25	-	XC6403CB25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB30	-	XC6403CB30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB31	-	XC6403CB31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB32	-	XC6403CB32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB33	-	XC6403CB33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB34	-	XC6403CB34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor




SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2CB80	-	XC6403CB80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB81	-	XC6403CB81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB82	-	XC6403CB82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB83	-	XC6403CB83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB84	-	XC6403CB84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB85	-	XC6403CB85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB86	-	XC6403CB86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB87	-	XC6403CB87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CB88	-	XC6403CB88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC	-	XC9235F2CC0R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2CC	-	XC9235F2CC4R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2CC	-	XC9235F2CCER-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2CC01	-	XC6403CC01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC02	-	XC6403CC02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC03	-	XC6403CC03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC04	-	XC6403CC04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC05	-	XC6403CC05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC06	-	XC6403CC06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC07	-	XC6403CC07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC08	-	XC6403CC08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC09	-	XC6403CC09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC10	-	XC6403CC10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC11	-	XC6403CC11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC12	-	XC6403CC12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC13	-	XC6403CC13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC14	-	XC6403CC14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC15	-	XC6403CC15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC16	-	XC6403CC16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC17	-	XC6403CC17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC18	-	XC6403CC18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC20	-	XC6403CC20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC21	-	XC6403CC21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC22	-	XC6403CC22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC24	-	XC6403CC24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC25	-	XC6403CC25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC30	-	XC6403CC30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC31	-	XC6403CC31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC32	-	XC6403CC32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC33	-	XC6403CC33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC34	-	XC6403CC34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC80	-	XC6403CC80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC81	-	XC6403CC81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC82	-	XC6403CC82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC83	-	XC6403CC83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC84	-	XC6403CC84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC85	-	XC6403CC85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC86	-	XC6403CC86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC87	-	XC6403CC87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CC88	-	XC6403CC88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD	-	XC9235F2DC0R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2CD	-	XC9235F2DC4R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2CD	-	XC9235F2DCER-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2CD01	-	XC6403CD01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD02	-	XC6403CD02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD03	-	XC6403CD03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD04	-	XC6403CD04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD05	-	XC6403CD05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD06	-	XC6403CD06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD07	-	XC6403CD07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD08	-	XC6403CD08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD09	-	XC6403CD09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD10	-	XC6403CD10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD11	-	XC6403CD11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD12	-	XC6403CD12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD13	-	XC6403CD13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD14	-	XC6403CD14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD15	-	XC6403CD15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD16	-	XC6403CD16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD17	-	XC6403CD17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD18	-	XC6403CD18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2CD20	-	XC6403CD20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD21	-	XC6403CD21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD22	-	XC6403CD22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD24	-	XC6403CD24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD25	-	XC6403CD25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD30	-	XC6403CD30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD31	-	XC6403CD31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD32	-	XC6403CD32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD33	-	XC6403CD33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD34	-	XC6403CD34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD80	-	XC6403CD80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD81	-	XC6403CD81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD82	-	XC6403CD82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD83	-	XC6403CD83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD84	-	XC6403CD84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD85	-	XC6403CD85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD86	-	XC6403CD86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD87	-	XC6403CD87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CD88	-	XC6403CD88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2CE	-	XC9235F2EC0R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2CE	-	XC9235F2EC4R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2CE	-	XC9235F2ECER-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2CE01	-	XC6403CE01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE02	-	XC6403CE02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE03	-	XC6403CE03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE04	-	XC6403CE04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE05	-	XC6403CE05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE06	-	XC6403CE06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE07	-	XC6403CE07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE08	-	XC6403CE08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE09	-	XC6403CE09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE10	-	XC6403CE10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE11	-	XC6403CE11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE12	-	XC6403CE12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE13	-	XC6403CE13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE14	-	XC6403CE14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE15	-	XC6403CE15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE16	-	XC6403CE16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE17	-	XC6403CE17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE18	-	XC6403CE18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE20	-	XC6403CE20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE21	-	XC6403CE21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE22	-	XC6403CE22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE24	-	XC6403CE24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE25	-	XC6403CE25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE30	-	XC6403CE30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE31	-	XC6403CE31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE32	-	XC6403CE32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE33	-	XC6403CE33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE34	-	XC6403CE34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE80	-	XC6403CE80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE81	-	XC6403CE81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE82	-	XC6403CE82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE83	-	XC6403CE83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE84	-	XC6403CE84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE85	-	XC6403CE85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE86	-	XC6403CE86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE87	-	XC6403CE87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CE88	-	XC6403CE88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF	-	XC9235F2FC0R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2CF	-	XC9235F2FC4R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2CF	-	XC9235F2FCER-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2CF01	-	XC6403CF01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF02	-	XC6403CF02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF03	-	XC6403CF03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF04	-	XC6403CF04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF05	-	XC6403CF05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF06	-	XC6403CF06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF07	-	XC6403CF07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF08	-	XC6403CF08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2CF09	-	XC6403CF09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF10	-	XC6403CF10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF11	-	XC6403CF11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF12	-	XC6403CF12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF13	-	XC6403CF13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF14	-	XC6403CF14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF15	-	XC6403CF15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF16	-	XC6403CF16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF17	-	XC6403CF17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF18	-	XC6403CF18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF20	-	XC6403CF20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF21	-	XC6403CF21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF22	-	XC6403CF22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF24	-	XC6403CF24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF25	-	XC6403CF25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF30	-	XC6403CF30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF31	-	XC6403CF31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF32	-	XC6403CF32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF33	-	XC6403CF33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF34	-	XC6403CF34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF80	-	XC6403CF80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF81	-	XC6403CF81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF82	-	XC6403CF82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF83	-	XC6403CF83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF84	-	XC6403CF84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF85	-	XC6403CF85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF86	-	XC6403CF86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF87	-	XC6403CF87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CF88	-	XC6403CF88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH	-	XC9235F2HC0R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2CH	-	XC9235F2HC4R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2CH	-	XC9235F2HCER-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2CH01	-	XC6403CH01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH02	-	XC6403CH02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH03	-	XC6403CH03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH04	-	XC6403CH04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH05	-	XC6403CH05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH06	-	XC6403CH06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH07	-	XC6403CH07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH08	-	XC6403CH08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH09	-	XC6403CH09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH10	-	XC6403CH10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH11	-	XC6403CH11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH12	-	XC6403CH12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH13	-	XC6403CH13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH14	-	XC6403CH14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH15	-	XC6403CH15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH16	-	XC6403CH16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH17	-	XC6403CH17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH18	-	XC6403CH18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH20	-	XC6403CH20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH21	-	XC6403CH21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH22	-	XC6403CH22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH24	-	XC6403CH24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH25	-	XC6403CH25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH30	-	XC6403CH30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH31	-	XC6403CH31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH32	-	XC6403CH32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH33	-	XC6403CH33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH34	-	XC6403CH34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH80	-	XC6403CH80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH81	-	XC6403CH81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH82	-	XC6403CH82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH83	-	XC6403CH83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH84	-	XC6403CH84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH85	-	XC6403CH85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH86	-	XC6403CH86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH87	-	XC6403CH87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CH88	-	XC6403CH88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK	-	XC9235F2KC0R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2CK	-	XC9235F2KC4R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2CK	-	XC9235F2KCER-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2CK01	-	XC6403CK01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK02	-	XC6403CK02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK03	-	XC6403CK03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK04	-	XC6403CK04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK05	-	XC6403CK05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK06	-	XC6403CK06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK07	-	XC6403CK07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK08	-	XC6403CK08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK09	-	XC6403CK09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK10	-	XC6403CK10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK11	-	XC6403CK11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK12	-	XC6403CK12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK13	-	XC6403CK13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK14	-	XC6403CK14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK15	-	XC6403CK15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK16	-	XC6403CK16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK17	-	XC6403CK17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK18	-	XC6403CK18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK20	-	XC6403CK20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK21	-	XC6403CK21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK22	-	XC6403CK22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK24	-	XC6403CK24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK25	-	XC6403CK25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK30	-	XC6403CK30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK31	-	XC6403CK31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK32	-	XC6403CK32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK33	-	XC6403CK33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK34	-	XC6403CK34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK80	-	XC6403CK80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK81	-	XC6403CK81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK82	-	XC6403CK82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK83	-	XC6403CK83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK84	-	XC6403CK84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK85	-	XC6403CK85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK86	-	XC6403CK86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK87	-	XC6403CK87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CK88	-	XC6403CK88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2CL	-	XC9235F2LC0R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2CL	-	XC9235F2LC4R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2CL	-	XC9235F2LCER-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2CL01	-	XC6403CL01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL02	-	XC6403CL02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL03	-	XC6403CL03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL04	-	XC6403CL04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL05	-	XC6403CL05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL06	-	XC6403CL06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL07	-	XC6403CL07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL08	-	XC6403CL08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL09	-	XC6403CL09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL10	-	XC6403CL10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL11	-	XC6403CL11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL12	-	XC6403CL12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL13	-	XC6403CL13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL14	-	XC6403CL14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL15	-	XC6403CL15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL16	-	XC6403CL16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL17	-	XC6403CL17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL18	-	XC6403CL18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL20	-	XC6403CL20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL21	-	XC6403CL21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL22	-	XC6403CL22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL24	-	XC6403CL24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL25	-	XC6403CL25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL30	-	XC6403CL30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL31	-	XC6403CL31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL32	-	XC6403CL32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL33	-	XC6403CL33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL34	-	XC6403CL34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2CL80	-	XC6403CL80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL81	-	XC6403CL81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL82	-	XC6403CL82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL83	-	XC6403CL83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL84	-	XC6403CL84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL85	-	XC6403CL85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL86	-	XC6403CL86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL87	-	XC6403CL87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CL88	-	XC6403CL88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM	-	XC9235F2MC0R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2CM	-	XC9235F2MC4R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2CM	-	XC9235F2MCER-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2CM01	-	XC6403CM01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM02	-	XC6403CM02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM03	-	XC6403CM03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM04	-	XC6403CM04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM05	-	XC6403CM05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM06	-	XC6403CM06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM07	-	XC6403CM07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM08	-	XC6403CM08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM09	-	XC6403CM09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM10	-	XC6403CM10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM11	-	XC6403CM11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM12	-	XC6403CM12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM13	-	XC6403CM13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM14	-	XC6403CM14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM15	-	XC6403CM15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM16	-	XC6403CM16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM17	-	XC6403CM17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM18	-	XC6403CM18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM20	-	XC6403CM20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM21	-	XC6403CM21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM22	-	XC6403CM22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM24	-	XC6403CM24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM25	-	XC6403CM25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM30	-	XC6403CM30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM31	-	XC6403CM31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM32	-	XC6403CM32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM33	-	XC6403CM33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM34	-	XC6403CM34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM80	-	XC6403CM80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM81	-	XC6403CM81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM82	-	XC6403CM82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM83	-	XC6403CM83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM84	-	XC6403CM84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM85	-	XC6403CM85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM86	-	XC6403CM86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM87	-	XC6403CM87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CM88	-	XC6403CM88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN01	-	XC6403CN01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN02	-	XC6403CN02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN03	-	XC6403CN03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN04	-	XC6403CN04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN05	-	XC6403CN05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN06	-	XC6403CN06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN07	-	XC6403CN07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN08	-	XC6403CN08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN09	-	XC6403CN09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN10	-	XC6403CN10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN11	-	XC6403CN11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN12	-	XC6403CN12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN13	-	XC6403CN13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN14	-	XC6403CN14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN15	-	XC6403CN15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN16	-	XC6403CN16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN17	-	XC6403CN17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN18	-	XC6403CN18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN20	-	XC6403CN20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN21	-	XC6403CN21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN22	-	XC6403CN22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2CN24	-	XC6403CN24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN25	-	XC6403CN25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN30	-	XC6403CN30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN31	-	XC6403CN31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN32	-	XC6403CN32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN33	-	XC6403CN33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN34	-	XC6403CN34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN80	-	XC6403CN80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN81	-	XC6403CN81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN82	-	XC6403CN82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN83	-	XC6403CN83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN84	-	XC6403CN84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN85	-	XC6403CN85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN86	-	XC6403CN86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN87	-	XC6403CN87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CN88	-	XC6403CN88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP01	-	XC6403CP01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP02	-	XC6403CP02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP03	-	XC6403CP03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP04	-	XC6403CP04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP05	-	XC6403CP05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP06	-	XC6403CP06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP07	-	XC6403CP07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP08	-	XC6403CP08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP09	-	XC6403CP09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP10	-	XC6403CP10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP11	-	XC6403CP11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP12	-	XC6403CP12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP13	-	XC6403CP13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP14	-	XC6403CP14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP15	-	XC6403CP15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP16	-	XC6403CP16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP17	-	XC6403CP17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP18	-	XC6403CP18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP20	-	XC6403CP20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP21	-	XC6403CP21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP22	-	XC6403CP22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP24	-	XC6403CP24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP25	-	XC6403CP25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP30	-	XC6403CP30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP31	-	XC6403CP31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP32	-	XC6403CP32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP33	-	XC6403CP33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP34	-	XC6403CP34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP80	-	XC6403CP80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP81	-	XC6403CP81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP82	-	XC6403CP82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP83	-	XC6403CP83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP84	-	XC6403CP84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP85	-	XC6403CP85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP86	-	XC6403CP86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP87	-	XC6403CP87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CP88	-	XC6403CP88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2CR01	-	XC6403CR01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR02	-	XC6403CR02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR03	-	XC6403CR03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR04	-	XC6403CR04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR05	-	XC6403CR05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR06	-	XC6403CR06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR07	-	XC6403CR07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR08	-	XC6403CR08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR09	-	XC6403CR09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR10	-	XC6403CR10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR11	-	XC6403CR11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR12	-	XC6403CR12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR13	-	XC6403CR13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR14	-	XC6403CR14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR15	-	XC6403CR15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR16	-	XC6403CR16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR17	-	XC6403CR17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2CR18	-	XC6403CR18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR20	-	XC6403CR20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR21	-	XC6403CR21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR22	-	XC6403CR22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR24	-	XC6403CR24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR25	-	XC6403CR25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR30	-	XC6403CR30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR31	-	XC6403CR31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR32	-	XC6403CR32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR33	-	XC6403CR33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR34	-	XC6403CR34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR80	-	XC6403CR80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR81	-	XC6403CR81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR82	-	XC6403CR82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR83	-	XC6403CR83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR84	-	XC6403CR84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR85	-	XC6403CR85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR86	-	XC6403CR86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR87	-	XC6403CR87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CR88	-	XC6403CR88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS01	-	XC6403CS01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS02	-	XC6403CS02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS03	-	XC6403CS03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS04	-	XC6403CS04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS05	-	XC6403CS05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS06	-	XC6403CS06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS07	-	XC6403CS07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS08	-	XC6403CS08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS09	-	XC6403CS09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS10	-	XC6403CS10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS11	-	XC6403CS11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS12	-	XC6403CS12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS13	-	XC6403CS13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS14	-	XC6403CS14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS15	-	XC6403CS15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS16	-	XC6403CS16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS17	-	XC6403CS17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS18	-	XC6403CS18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS20	-	XC6403CS20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS21	-	XC6403CS21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS22	-	XC6403CS22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS24	-	XC6403CS24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS25	-	XC6403CS25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS30	-	XC6403CS30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS31	-	XC6403CS31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS32	-	XC6403CS32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS33	-	XC6403CS33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS34	-	XC6403CS34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS80	-	XC6403CS80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS81	-	XC6403CS81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS82	-	XC6403CS82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS83	-	XC6403CS83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS84	-	XC6403CS84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS85	-	XC6403CS85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS86	-	XC6403CS86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS87	-	XC6403CS87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CS88	-	XC6403CS88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT01	-	XC6403CT01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT02	-	XC6403CT02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT03	-	XC6403CT03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT04	-	XC6403CT04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT05	-	XC6403CT05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT06	-	XC6403CT06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT07	-	XC6403CT07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT08	-	XC6403CT08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT09	-	XC6403CT09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT10	-	XC6403CT10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT11	-	XC6403CT11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT12	-	XC6403CT12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT13	-	XC6403CT13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2CT14	-	XC6403CT14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT15	-	XC6403CT15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT16	-	XC6403CT16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT17	-	XC6403CT17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT18	-	XC6403CT18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT20	-	XC6403CT20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT21	-	XC6403CT21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT22	-	XC6403CT22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT24	-	XC6403CT24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT25	-	XC6403CT25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT30	-	XC6403CT30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT31	-	XC6403CT31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT32	-	XC6403CT32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT33	-	XC6403CT33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT34	-	XC6403CT34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT80	-	XC6403CT80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT81	-	XC6403CT81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT82	-	XC6403CT82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT83	-	XC6403CT83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT84	-	XC6403CT84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT85	-	XC6403CT85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT86	-	XC6403CT86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT87	-	XC6403CT87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CT88	-	XC6403CT88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU01	-	XC6403CU01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU02	-	XC6403CU02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU03	-	XC6403CU03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU04	-	XC6403CU04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU05	-	XC6403CU05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU06	-	XC6403CU06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU07	-	XC6403CU07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU08	-	XC6403CU08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU09	-	XC6403CU09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU10	-	XC6403CU10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU11	-	XC6403CU11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU12	-	XC6403CU12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU13	-	XC6403CU13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU14	-	XC6403CU14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU15	-	XC6403CU15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU16	-	XC6403CU16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU17	-	XC6403CU17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU18	-	XC6403CU18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU20	-	XC6403CU20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU21	-	XC6403CU21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU22	-	XC6403CU22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU24	-	XC6403CU24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU25	-	XC6403CU25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU30	-	XC6403CU30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU31	-	XC6403CU31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU32	-	XC6403CU32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU33	-	XC6403CU33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU34	-	XC6403CU34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU80	-	XC6403CU80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU81	-	XC6403CU81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU82	-	XC6403CU82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU83	-	XC6403CU83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU84	-	XC6403CU84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU85	-	XC6403CU85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU86	-	XC6403CU86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU87	-	XC6403CU87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2CU88	-	XC6403CU88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2D	-	R3117K341A	Vdet-IC	3.4V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2D	-	RP100K181D	LVR-IC	LDO, LN, 1.8V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2D	-	RP112K361B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
2D	-	RP173K361A	LVR-IC	LDO, 3.6V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2D	-	XC6221C21B7R	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2D	-	XC6223C2319R-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2D	-	XC6224B2117R	LVR-IC	LDO, 2.1V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
2D	-	XC6229H18B1R-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2D0	-	XC9235F30C0R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2D0	-	XC9235F30C4R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2D0	-	XC9235F30CER-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2D1	-	XC9235F31C0R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2D1	-	XC9235F31C4R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2D1	-	XC9235F31CER-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2D101	-	XC6365D101ER	DC-DC-IC	PWM st-down, 100kHz, Adj. 1.5..6V±2.5%, 1A, +CE, soft start	USP-6C	49zp	DC18	9b	Tor
2D102	-	XC6365D102ER	DC-DC-IC	PWM st-down, 180kHz, Adj. 1.5..6V±2.5%, 1A, +CE, soft start	USP-6C	49zp	DC18	9b	Tor
2D103	-	XC6365D103ER	DC-DC-IC	PWM st-down, 300kHz, Adj. 1.5..6V±2.5%, 1A, +CE, soft start	USP-6C	49zp	DC18	9b	Tor
2D104	-	XC6365D105ER	DC-DC-IC	PWM st-down, 500kHz, Adj. 1.5..6V±2.5%, 1A, +CE, soft start	USP-6C	49zp	DC18	9b	Tor
2D2	-	XC9235F32C0R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2D2	-	XC9235F32C4R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2D2	-	XC9235F32CER-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2D3	-	XC9235F33C0R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2D3	-	XC9235F33C4R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2D3	-	XC9235F33CER-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2D4	-	XC9235F34C0R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2D4	-	XC9235F34C4R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2D4	-	XC9235F34CER-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2D5	-	XC9235F35C0R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2D5	-	XC9235F35C4R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2D5	-	XC9235F35CER-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2D6	-	XC9235F36C0R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2D6	-	XC9235F36C4R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2D6	-	XC9235F36CER-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2D7	-	XC9235F37C0R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2D7	-	XC9235F37C4R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2D7	-	XC9235F37CER-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2D8	-	XC9235F38C0R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2D8	-	XC9235F38C4R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2D8	-	XC9235F38CER-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2D9	-	XC9235F39C0R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2D9	-	XC9235F39C4R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2D9	-	XC9235F39CER-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2DA	-	XC9235F3AC0R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2DA	-	XC9235F3AC4R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2DA	-	XC9235F3ACER-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2DA01	-	XC6403DA01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA02	-	XC6403DA02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA03	-	XC6403DA03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA04	-	XC6403DA04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA05	-	XC6403DA05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA06	-	XC6403DA06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA07	-	XC6403DA07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA08	-	XC6403DA08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA09	-	XC6403DA09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA10	-	XC6403DA10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA11	-	XC6403DA11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA12	-	XC6403DA12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA13	-	XC6403DA13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA14	-	XC6403DA14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA15	-	XC6403DA15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA16	-	XC6403DA16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA17	-	XC6403DA17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA18	-	XC6403DA18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA20	-	XC6403DA20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA21	-	XC6403DA21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA22	-	XC6403DA22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA24	-	XC6403DA24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA25	-	XC6403DA25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA30	-	XC6403DA30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA31	-	XC6403DA31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA32	-	XC6403DA32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA33	-	XC6403DA33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA34	-	XC6403DA34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA80	-	XC6403DA80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA81	-	XC6403DA81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA82	-	XC6403DA82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA83	-	XC6403DA83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA84	-	XC6403DA84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA85	-	XC6403DA85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2DA86	-	XC6403DA86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA87	-	XC6403DA87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DA88	-	XC6403DA88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB	-	XC9235F3BC0R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2DB	-	XC9235F3BC4R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2DB	-	XC9235F3BCER-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2DB01	-	XC6403DB01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB02	-	XC6403DB02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB03	-	XC6403DB03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB04	-	XC6403DB04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB05	-	XC6403DB05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB06	-	XC6403DB06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB07	-	XC6403DB07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB08	-	XC6403DB08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB09	-	XC6403DB09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB10	-	XC6403DB10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB11	-	XC6403DB11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB12	-	XC6403DB12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB13	-	XC6403DB13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB14	-	XC6403DB14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB15	-	XC6403DB15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB16	-	XC6403DB16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB17	-	XC6403DB17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB18	-	XC6403DB18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB20	-	XC6403DB20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB21	-	XC6403DB21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB22	-	XC6403DB22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB24	-	XC6403DB24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB25	-	XC6403DB25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB30	-	XC6403DB30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB31	-	XC6403DB31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB32	-	XC6403DB32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB33	-	XC6403DB33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB34	-	XC6403DB34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB80	-	XC6403DB80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB81	-	XC6403DB81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB82	-	XC6403DB82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB83	-	XC6403DB83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB84	-	XC6403DB84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB85	-	XC6403DB85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB86	-	XC6403DB86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB87	-	XC6403DB87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DB88	-	XC6403DB88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC	-	XC9235F3CC0R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2DC	-	XC9235F3CC4R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2DC	-	XC9235F3CCER-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2DC01	-	XC6403DC01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC02	-	XC6403DC02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC03	-	XC6403DC03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC04	-	XC6403DC04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC05	-	XC6403DC05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC06	-	XC6403DC06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC07	-	XC6403DC07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC08	-	XC6403DC08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC09	-	XC6403DC09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC10	-	XC6403DC10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC11	-	XC6403DC11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC12	-	XC6403DC12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC13	-	XC6403DC13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC14	-	XC6403DC14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC15	-	XC6403DC15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC16	-	XC6403DC16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC17	-	XC6403DC17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC18	-	XC6403DC18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC20	-	XC6403DC20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC21	-	XC6403DC21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC22	-	XC6403DC22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC24	-	XC6403DC24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC25	-	XC6403DC25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC30	-	XC6403DC30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2DC31	-	XC6403DC31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC32	-	XC6403DC32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC33	-	XC6403DC33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC34	-	XC6403DC34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC80	-	XC6403DC80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC81	-	XC6403DC81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC82	-	XC6403DC82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC83	-	XC6403DC83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC84	-	XC6403DC84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC85	-	XC6403DC85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC86	-	XC6403DC86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC87	-	XC6403DC87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DC88	-	XC6403DC88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD	-	XC9235F3DC0R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2DD	-	XC9235F3DC4R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2DD	-	XC9235F3DCER-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2DD01	-	XC6403DD01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD02	-	XC6403DD02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD03	-	XC6403DD03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD04	-	XC6403DD04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD05	-	XC6403DD05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD06	-	XC6403DD06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD07	-	XC6403DD07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD08	-	XC6403DD08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD09	-	XC6403DD09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD10	-	XC6403DD10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD11	-	XC6403DD11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD12	-	XC6403DD12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD13	-	XC6403DD13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD14	-	XC6403DD14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD15	-	XC6403DD15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD16	-	XC6403DD16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD17	-	XC6403DD17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD18	-	XC6403DD18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD20	-	XC6403DD20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD21	-	XC6403DD21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD22	-	XC6403DD22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD24	-	XC6403DD24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD25	-	XC6403DD25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD30	-	XC6403DD30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD31	-	XC6403DD31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD32	-	XC6403DD32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD33	-	XC6403DD33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD34	-	XC6403DD34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD80	-	XC6403DD80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD81	-	XC6403DD81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD82	-	XC6403DD82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD83	-	XC6403DD83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD84	-	XC6403DD84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD85	-	XC6403DD85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD86	-	XC6403DD86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD87	-	XC6403DD87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DD88	-	XC6403DD88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
2DE	-	XC9235F3EC0R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2DE	-	XC9235F3EC4R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2DE	-	XC9235F3ECER-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2DE01	-	XC6403DE01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE02	-	XC6403DE02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE03	-	XC6403DE03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE04	-	XC6403DE04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE05	-	XC6403DE05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE06	-	XC6403DE06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE07	-	XC6403DE07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE08	-	XC6403DE08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE09	-	XC6403DE09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE10	-	XC6403DE10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE11	-	XC6403DE11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE12	-	XC6403DE12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE13	-	XC6403DE13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE14	-	XC6403DE14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2DE15	-	XC6403DE15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE16	-	XC6403DE16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE17	-	XC6403DE17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE18	-	XC6403DE18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE20	-	XC6403DE20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE21	-	XC6403DE21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE22	-	XC6403DE22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE24	-	XC6403DE24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE25	-	XC6403DE25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE30	-	XC6403DE30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE31	-	XC6403DE31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE32	-	XC6403DE32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE33	-	XC6403DE33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE34	-	XC6403DE34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE80	-	XC6403DE80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE81	-	XC6403DE81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE82	-	XC6403DE82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE83	-	XC6403DE83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE84	-	XC6403DE84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE85	-	XC6403DE85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE86	-	XC6403DE86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE87	-	XC6403DE87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DE88	-	XC6403DE88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF	-	XC9235F3FC0R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2DF	-	XC9235F3FC4R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2DF	-	XC9235F3FCER-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2DF01	-	XC6403DF01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF02	-	XC6403DF02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF03	-	XC6403DF03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF04	-	XC6403DF04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF05	-	XC6403DF05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF06	-	XC6403DF06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF07	-	XC6403DF07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF08	-	XC6403DF08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF09	-	XC6403DF09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF10	-	XC6403DF10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF11	-	XC6403DF11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF12	-	XC6403DF12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF13	-	XC6403DF13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF14	-	XC6403DF14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF15	-	XC6403DF15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF16	-	XC6403DF16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF17	-	XC6403DF17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF18	-	XC6403DF18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF20	-	XC6403DF20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF21	-	XC6403DF21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF22	-	XC6403DF22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF24	-	XC6403DF24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF25	-	XC6403DF25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF30	-	XC6403DF30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF31	-	XC6403DF31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF32	-	XC6403DF32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF33	-	XC6403DF33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF34	-	XC6403DF34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF80	-	XC6403DF80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF81	-	XC6403DF81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF82	-	XC6403DF82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF83	-	XC6403DF83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF84	-	XC6403DF84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF85	-	XC6403DF85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF86	-	XC6403DF86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF87	-	XC6403DF87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DF88	-	XC6403DF88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH	-	XC9235F3HC0R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2DH	-	XC9235F3HC4R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2DH	-	XC9235F3HCER-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2DH01	-	XC6403DH01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH02	-	XC6403DH02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH03	-	XC6403DH03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH04	-	XC6403DH04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2DH05	-	XC6403DH05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH06	-	XC6403DH06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH07	-	XC6403DH07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH08	-	XC6403DH08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH09	-	XC6403DH09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH10	-	XC6403DH10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH11	-	XC6403DH11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH12	-	XC6403DH12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH13	-	XC6403DH13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH14	-	XC6403DH14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH15	-	XC6403DH15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH16	-	XC6403DH16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH17	-	XC6403DH17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH18	-	XC6403DH18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH20	-	XC6403DH20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH21	-	XC6403DH21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH22	-	XC6403DH22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH24	-	XC6403DH24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH25	-	XC6403DH25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH30	-	XC6403DH30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH31	-	XC6403DH31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH32	-	XC6403DH32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH33	-	XC6403DH33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH34	-	XC6403DH34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH80	-	XC6403DH80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH81	-	XC6403DH81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH82	-	XC6403DH82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH83	-	XC6403DH83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH84	-	XC6403DH84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH85	-	XC6403DH85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH86	-	XC6403DH86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH87	-	XC6403DH87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DH88	-	XC6403DH88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK	-	XC9235F3KC0R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2DK	-	XC9235F3KC4R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2DK	-	XC9235F3KCER-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2DK01	-	XC6403DK01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK02	-	XC6403DK02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK03	-	XC6403DK03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK04	-	XC6403DK04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK05	-	XC6403DK05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK06	-	XC6403DK06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK07	-	XC6403DK07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK08	-	XC6403DK08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK09	-	XC6403DK09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK10	-	XC6403DK10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK11	-	XC6403DK11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK12	-	XC6403DK12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK13	-	XC6403DK13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK14	-	XC6403DK14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK15	-	XC6403DK15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK16	-	XC6403DK16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK17	-	XC6403DK17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK18	-	XC6403DK18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK20	-	XC6403DK20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK21	-	XC6403DK21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK22	-	XC6403DK22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK24	-	XC6403DK24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK25	-	XC6403DK25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK30	-	XC6403DK30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK31	-	XC6403DK31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK32	-	XC6403DK32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK33	-	XC6403DK33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK34	-	XC6403DK34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK80	-	XC6403DK80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK81	-	XC6403DK81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK82	-	XC6403DK82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK83	-	XC6403DK83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK84	-	XC6403DK84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK85	-	XC6403DK85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2DK86	-	XC6403DK86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK87	-	XC6403DK87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DK88	-	XC6403DK88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
2DL	-	XC9235F3LC0R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2DL	-	XC9235F3LC4R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2DL	-	XC9235F3LCER-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2DL01	-	XC6403DL01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL02	-	XC6403DL02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL03	-	XC6403DL03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL04	-	XC6403DL04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL05	-	XC6403DL05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL06	-	XC6403DL06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL07	-	XC6403DL07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL08	-	XC6403DL08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL09	-	XC6403DL09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL10	-	XC6403DL10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL11	-	XC6403DL11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL12	-	XC6403DL12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL13	-	XC6403DL13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL14	-	XC6403DL14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL15	-	XC6403DL15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL16	-	XC6403DL16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL17	-	XC6403DL17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL18	-	XC6403DL18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL20	-	XC6403DL20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL21	-	XC6403DL21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL22	-	XC6403DL22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL24	-	XC6403DL24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL25	-	XC6403DL25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL30	-	XC6403DL30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL31	-	XC6403DL31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL32	-	XC6403DL32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL33	-	XC6403DL33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL34	-	XC6403DL34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL80	-	XC6403DL80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL81	-	XC6403DL81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL82	-	XC6403DL82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL83	-	XC6403DL83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL84	-	XC6403DL84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL85	-	XC6403DL85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL86	-	XC6403DL86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL87	-	XC6403DL87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DL88	-	XC6403DL88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM	-	XC9235F3MC0R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2DM	-	XC9235F3MC4R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2DM	-	XC9235F3MCER-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2DM01	-	XC6403DM01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM02	-	XC6403DM02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM03	-	XC6403DM03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM04	-	XC6403DM04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM05	-	XC6403DM05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM06	-	XC6403DM06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM07	-	XC6403DM07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM08	-	XC6403DM08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM09	-	XC6403DM09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM10	-	XC6403DM10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM11	-	XC6403DM11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM12	-	XC6403DM12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM13	-	XC6403DM13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM14	-	XC6403DM14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM15	-	XC6403DM15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM16	-	XC6403DM16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM17	-	XC6403DM17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM18	-	XC6403DM18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM20	-	XC6403DM20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM21	-	XC6403DM21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM22	-	XC6403DM22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM24	-	XC6403DM24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM25	-	XC6403DM25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM30	-	XC6403DM30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2DM31	-	XC6403DM31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM32	-	XC6403DM32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM33	-	XC6403DM33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM34	-	XC6403DM34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM80	-	XC6403DM80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM81	-	XC6403DM81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM82	-	XC6403DM82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM83	-	XC6403DM83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM84	-	XC6403DM84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM85	-	XC6403DM85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM86	-	XC6403DM86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM87	-	XC6403DM87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DM88	-	XC6403DM88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN01	-	XC6403DN01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN02	-	XC6403DN02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN03	-	XC6403DN03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN04	-	XC6403DN04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN05	-	XC6403DN05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN06	-	XC6403DN06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN07	-	XC6403DN07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN08	-	XC6403DN08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN09	-	XC6403DN09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN10	-	XC6403DN10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN11	-	XC6403DN11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN12	-	XC6403DN12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN13	-	XC6403DN13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN14	-	XC6403DN14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN15	-	XC6403DN15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN16	-	XC6403DN16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN17	-	XC6403DN17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN18	-	XC6403DN18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN20	-	XC6403DN20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN21	-	XC6403DN21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN22	-	XC6403DN22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN24	-	XC6403DN24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN25	-	XC6403DN25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN30	-	XC6403DN30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN31	-	XC6403DN31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN32	-	XC6403DN32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN33	-	XC6403DN33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN34	-	XC6403DN34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN80	-	XC6403DN80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN81	-	XC6403DN81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN82	-	XC6403DN82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN83	-	XC6403DN83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN84	-	XC6403DN84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN85	-	XC6403DN85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN86	-	XC6403DN86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN87	-	XC6403DN87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DN88	-	XC6403DN88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP01	-	XC6403DP01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP02	-	XC6403DP02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP03	-	XC6403DP03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP04	-	XC6403DP04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP05	-	XC6403DP05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP06	-	XC6403DP06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP07	-	XC6403DP07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP08	-	XC6403DP08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP09	-	XC6403DP09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP10	-	XC6403DP10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP11	-	XC6403DP11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP12	-	XC6403DP12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP13	-	XC6403DP13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP14	-	XC6403DP14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP15	-	XC6403DP15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP16	-	XC6403DP16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP17	-	XC6403DP17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP18	-	XC6403DP18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP20	-	XC6403DP20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP21	-	XC6403DP21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2DP22	-	XC6403DP22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP24	-	XC6403DP24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP25	-	XC6403DP25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP30	-	XC6403DP30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP31	-	XC6403DP31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP32	-	XC6403DP32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP33	-	XC6403DP33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP34	-	XC6403DP34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP80	-	XC6403DP80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP81	-	XC6403DP81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP82	-	XC6403DP82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP83	-	XC6403DP83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP84	-	XC6403DP84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP85	-	XC6403DP85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP86	-	XC6403DP86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP87	-	XC6403DP87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DP88	-	XC6403DP88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
2DR01	-	XC6403DR01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR02	-	XC6403DR02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR03	-	XC6403DR03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR04	-	XC6403DR04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR05	-	XC6403DR05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR06	-	XC6403DR06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR07	-	XC6403DR07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR08	-	XC6403DR08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR09	-	XC6403DR09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR10	-	XC6403DR10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR11	-	XC6403DR11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR12	-	XC6403DR12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR13	-	XC6403DR13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR14	-	XC6403DR14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR15	-	XC6403DR15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR16	-	XC6403DR16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR17	-	XC6403DR17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR18	-	XC6403DR18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR20	-	XC6403DR20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR21	-	XC6403DR21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR22	-	XC6403DR22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR24	-	XC6403DR24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR25	-	XC6403DR25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR30	-	XC6403DR30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR31	-	XC6403DR31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR32	-	XC6403DR32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR33	-	XC6403DR33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR34	-	XC6403DR34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR80	-	XC6403DR80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR81	-	XC6403DR81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR82	-	XC6403DR82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR83	-	XC6403DR83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR84	-	XC6403DR84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR85	-	XC6403DR85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR86	-	XC6403DR86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR87	-	XC6403DR87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DR88	-	XC6403DR88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS01	-	XC6403DS01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS02	-	XC6403DS02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS03	-	XC6403DS03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS04	-	XC6403DS04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS05	-	XC6403DS05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS06	-	XC6403DS06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS07	-	XC6403DS07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS08	-	XC6403DS08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS09	-	XC6403DS09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS10	-	XC6403DS10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS11	-	XC6403DS11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS12	-	XC6403DS12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS13	-	XC6403DS13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS14	-	XC6403DS14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS15	-	XC6403DS15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS16	-	XC6403DS16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2DS17	-	XC6403DS17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS18	-	XC6403DS18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS20	-	XC6403DS20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS21	-	XC6403DS21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS22	-	XC6403DS22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS24	-	XC6403DS24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS25	-	XC6403DS25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS30	-	XC6403DS30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS31	-	XC6403DS31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS32	-	XC6403DS32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS33	-	XC6403DS33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS34	-	XC6403DS34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS80	-	XC6403DS80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS81	-	XC6403DS81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS82	-	XC6403DS82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS83	-	XC6403DS83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS84	-	XC6403DS84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS85	-	XC6403DS85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS86	-	XC6403DS86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS87	-	XC6403DS87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DS88	-	XC6403DS88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT01	-	XC6403DT01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT02	-	XC6403DT02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT03	-	XC6403DT03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT04	-	XC6403DT04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT05	-	XC6403DT05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT06	-	XC6403DT06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT07	-	XC6403DT07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT08	-	XC6403DT08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT09	-	XC6403DT09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT10	-	XC6403DT10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT11	-	XC6403DT11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT12	-	XC6403DT12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT13	-	XC6403DT13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT14	-	XC6403DT14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT15	-	XC6403DT15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT16	-	XC6403DT16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT17	-	XC6403DT17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT18	-	XC6403DT18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT20	-	XC6403DT20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT21	-	XC6403DT21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT22	-	XC6403DT22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT24	-	XC6403DT24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT25	-	XC6403DT25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT30	-	XC6403DT30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT31	-	XC6403DT31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT32	-	XC6403DT32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT33	-	XC6403DT33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT34	-	XC6403DT34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT80	-	XC6403DT80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT81	-	XC6403DT81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT82	-	XC6403DT82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT83	-	XC6403DT83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT84	-	XC6403DT84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT85	-	XC6403DT85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT86	-	XC6403DT86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT87	-	XC6403DT87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DT88	-	XC6403DT88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU01	-	XC6403DU01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU02	-	XC6403DU02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU03	-	XC6403DU03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU04	-	XC6403DU04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU05	-	XC6403DU05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU06	-	XC6403DU06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU07	-	XC6403DU07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU08	-	XC6403DU08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU09	-	XC6403DU09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU10	-	XC6403DU10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU11	-	XC6403DU11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU12	-	XC6403DU12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2DU13	-	XC6403DU13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU14	-	XC6403DU14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU15	-	XC6403DU15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU16	-	XC6403DU16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU17	-	XC6403DU17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU18	-	XC6403DU18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU20	-	XC6403DU20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU21	-	XC6403DU21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU22	-	XC6403DU22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU24	-	XC6403DU24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU25	-	XC6403DU25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU30	-	XC6403DU30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU31	-	XC6403DU31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU32	-	XC6403DU32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU33	-	XC6403DU33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU34	-	XC6403DU34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU80	-	XC6403DU80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU81	-	XC6403DU81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU82	-	XC6403DU82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU83	-	XC6403DU83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU84	-	XC6403DU84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU85	-	XC6403DU85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU86	-	XC6403DU86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU87	-	XC6403DU87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2DU88	-	XC6403DU88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
2E	-	R3117K351A	Vdet-IC	3.5V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2E	-	RP100K181D5	LVR-IC	LDO, LN, 1.85V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2E	-	RP112K371B	LVR-IC	LDO, 3.7V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
2E	-	RP173K371A	LVR-IC	LDO, 3.7V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2E	-	XC6221C22B7R	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2E	-	XC6223C2419R-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2E	-	XC6224B2217R	LVR-IC	LDO, 2.2V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
2E	-	XC6229H1911R-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2E0	-	XC9235F40C0R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2E0	-	XC9235F40C4R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2E0	-	XC9235F40CER-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2E200	-	XC6372E200D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E201	-	XC6372E201D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E202	-	XC6372E202D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E210	-	XC6372E210D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E211	-	XC6372E211D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E212	-	XC6372E212D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E220	-	XC6372E220D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E221	-	XC6372E221D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E222	-	XC6372E222D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E230	-	XC6372E230D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E231	-	XC6372E231D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E232	-	XC6372E232D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E240	-	XC6372E240D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E241	-	XC6372E241D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E242	-	XC6372E242D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E250	-	XC6372E250D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E251	-	XC6372E251D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E252	-	XC6372E252D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E260	-	XC6372E260D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E261	-	XC6372E261D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E262	-	XC6372E262D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E270	-	XC6372E270D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E271	-	XC6372E271D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E272	-	XC6372E272D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E280	-	XC6372E280D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E281	-	XC6372E281D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E282	-	XC6372E282D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E290	-	XC6372E290D	DC-DC-IC	PWM/PFM step-up, 50kHz, 2.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E291	-	XC6372E291D	DC-DC-IC	PWM/PFM step-up, 100kHz, 2.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E292	-	XC6372E292D	DC-DC-IC	PWM/PFM step-up, 180kHz, 2.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E300	-	XC6372E300D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E301	-	XC6372E301D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E302	-	XC6372E302D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E310	-	XC6372E310D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2E311	-	XC6372E311D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E312	-	XC6372E312D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E320	-	XC6372E320D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E321	-	XC6372E321D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E322	-	XC6372E322D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E330	-	XC6372E330D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E331	-	XC6372E331D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E332	-	XC6372E332D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E340	-	XC6372E340D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E341	-	XC6372E341D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E342	-	XC6372E342D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E350	-	XC6372E350D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E351	-	XC6372E351D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E352	-	XC6372E352D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E360	-	XC6372E360D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E361	-	XC6372E361D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E362	-	XC6372E362D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E370	-	XC6372E370D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E371	-	XC6372E371D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E372	-	XC6372E372D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E380	-	XC6372E380D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E381	-	XC6372E381D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E382	-	XC6372E382D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E390	-	XC6372E390D	DC-DC-IC	PWM/PFM step-up, 50kHz, 3.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E391	-	XC6372E391D	DC-DC-IC	PWM/PFM step-up, 100kHz, 3.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E392	-	XC6372E392D	DC-DC-IC	PWM/PFM step-up, 180kHz, 3.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E400	-	XC6372E400D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E401	-	XC6372E401D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E402	-	XC6372E402D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E410	-	XC6372E410D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E411	-	XC6372E411D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E412	-	XC6372E412D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E420	-	XC6372E420D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E421	-	XC6372E421D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E422	-	XC6372E422D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E430	-	XC6372E430D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E431	-	XC6372E431D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E432	-	XC6372E432D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E440	-	XC6372E440D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E441	-	XC6372E441D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E442	-	XC6372E442D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E450	-	XC6372E450D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E451	-	XC6372E451D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E452	-	XC6372E452D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E460	-	XC6372E460D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E461	-	XC6372E461D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E462	-	XC6372E462D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E470	-	XC6372E470D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E471	-	XC6372E471D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E472	-	XC6372E472D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E480	-	XC6372E480D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E481	-	XC6372E481D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E482	-	XC6372E482D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E490	-	XC6372E490D	DC-DC-IC	PWM/PFM step-up, 50kHz, 4.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E491	-	XC6372E491D	DC-DC-IC	PWM/PFM step-up, 100kHz, 4.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E492	-	XC6372E492D	DC-DC-IC	PWM/PFM step-up, 180kHz, 4.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E500	-	XC6372E500D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E501	-	XC6372E501D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E502	-	XC6372E502D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E510	-	XC6372E510D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E511	-	XC6372E511D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E512	-	XC6372E512D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E520	-	XC6372E520D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E521	-	XC6372E521D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E522	-	XC6372E522D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E530	-	XC6372E530D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E531	-	XC6372E531D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E532	-	XC6372E532D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E540	-	XC6372E540D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E541	-	XC6372E541D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor






SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2E542	-	XC6372E542D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E550	-	XC6372E550D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E551	-	XC6372E551D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E552	-	XC6372E552D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E560	-	XC6372E560D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E561	-	XC6372E561D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E562	-	XC6372E562D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E570	-	XC6372E570D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E571	-	XC6372E571D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E572	-	XC6372E572D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E580	-	XC6372E580D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E581	-	XC6372E581D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E582	-	XC6372E582D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E590	-	XC6372E590D	DC-DC-IC	PWM/PFM step-up, 50kHz, 5.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E591	-	XC6372E591D	DC-DC-IC	PWM/PFM step-up, 100kHz, 5.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E592	-	XC6372E592D	DC-DC-IC	PWM/PFM step-up, 180kHz, 5.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E600	-	XC6372E600D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E601	-	XC6372E601D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E602	-	XC6372E602D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E610	-	XC6372E610D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E611	-	XC6372E611D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E612	-	XC6372E612D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E620	-	XC6372E620D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E621	-	XC6372E621D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E622	-	XC6372E622D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E630	-	XC6372E630D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E631	-	XC6372E631D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E632	-	XC6372E632D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E640	-	XC6372E640D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E641	-	XC6372E641D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E642	-	XC6372E642D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E650	-	XC6372E650D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E651	-	XC6372E651D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E652	-	XC6372E652D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E660	-	XC6372E660D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E661	-	XC6372E661D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E662	-	XC6372E662D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E670	-	XC6372E670D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E671	-	XC6372E671D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E672	-	XC6372E672D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E680	-	XC6372E680D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E681	-	XC6372E681D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E682	-	XC6372E682D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E690	-	XC6372E690D	DC-DC-IC	PWM/PFM step-up, 50kHz, 6.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E691	-	XC6372E691D	DC-DC-IC	PWM/PFM step-up, 100kHz, 6.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E692	-	XC6372E692D	DC-DC-IC	PWM/PFM step-up, 180kHz, 6.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E700	-	XC6372E700D	DC-DC-IC	PWM/PFM step-up, 50kHz, 7.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E701	-	XC6372E701D	DC-DC-IC	PWM/PFM step-up, 100kHz, 7.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2E702	-	XC6372E702D	DC-DC-IC	PWM/PFM step-up, 180kHz, 7.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
2EA	-	AP6213A-22NHFGU	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EA	-	AP6213A-22NHFPU	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2EA	mg	AP6213A-22NHFGU1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EA	mg	AP6213A-22NHFPU1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2EB	-	AP6213A-22NLFGU	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EB	-	AP6213A-22NLFPU	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2EB	mg	AP6213A-22NLFGU1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EB	mg	AP6213A-22NLFPU1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2EC	-	AP6213A-22NHNGU	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EC	-	AP6213A-22NHNPU	LVR-IC	LDO, 2.2V±2%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2EC	mg	AP6213A-22NHNGU1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EC	mg	AP6213A-22NHNPU1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2ED	-	AP6213A-22NLNGU	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ED	-	AP6213A-22NLNPU	LVR-IC	LDO, 2.2V±2%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2ED	mg	AP6213A-22NLNGU1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ED	mg	AP6213A-22NLNPU1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2EE	-	AP6213A-22UHFGU	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EE	-	AP6213A-22UHFPU	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2EE	mg	AP6213A-22UHFGU1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EE	mg	AP6213A-22UHFPU1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2EF	-	AP6213A-22ULFGU	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2EF	-	AP6213A-22ULFPU	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2EF	mg	AP6213A-22ULFGU1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EF	mg	AP6213A-22ULFPU1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2EG	-	AP6213A-22UHNGU	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EG	-	AP6213A-22UHNPU	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2EG	mg	AP6213A-22UHNGU1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EG	mg	AP6213A-22UHNPU1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2EH	-	AP6213A-22ULNGU	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EH	-	AP6213A-22ULNPU	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2EH	mg	AP6213A-22ULNGU1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EH	mg	AP6213A-22ULNPU1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2EJ	-	AP6213A-22DHFGU	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EJ	-	AP6213A-22DHFPU	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2EJ	mg	AP6213A-22DHFGU1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EJ	mg	AP6213A-22DHFPU1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2EK	-	AP6213A-22DLFGU	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EK	-	AP6213A-22DLFPU	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2EK	mg	AP6213A-22DLFGU1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EK	mg	AP6213A-22DLFPU1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2EL	-	AP6213A-22DHNGU	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EL	-	AP6213A-22DHNPU	LVR-IC	LDO, 2.2V±2%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2EL	mg	AP6213A-22DHNGU1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EL	mg	AP6213A-22DHNPU1	LVR-IC	LDO, 2.2V±1%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2EM	-	AP6213A-22DLNGU	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2EM	-	AP6213A-22DLNPU	LVR-IC	LDO, 2.2V±2%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2EM	mg	AP6213A-22DLNGU1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ia	Anw
2EM	mg	AP6213A-22DLNPU1	LVR-IC	LDO, 2.2V±1%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2EV01	-	XC6403EV01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV02	-	XC6403EV02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV03	-	XC6403EV03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV04	-	XC6403EV04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV05	-	XC6403EV05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV06	-	XC6403EV06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV07	-	XC6403EV07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV08	-	XC6403EV08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV09	-	XC6403EV09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV10	-	XC6403EV10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV11	-	XC6403EV11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV12	-	XC6403EV12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV13	-	XC6403EV13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV14	-	XC6403EV14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV15	-	XC6403EV15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV16	-	XC6403EV16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV17	-	XC6403EV17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV18	-	XC6403EV18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV20	-	XC6403EV20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV21	-	XC6403EV21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV22	-	XC6403EV22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV24	-	XC6403EV24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV25	-	XC6403EV25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV30	-	XC6403EV30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV31	-	XC6403EV31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV32	-	XC6403EV32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV33	-	XC6403EV33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV34	-	XC6403EV34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV80	-	XC6403EV80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV81	-	XC6403EV81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV82	-	XC6403EV82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV83	-	XC6403EV83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV84	-	XC6403EV84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV85	-	XC6403EV85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV86	-	XC6403EV86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV87	-	XC6403EV87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EV88	-	XC6403EV88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX01	-	XC6403EX01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX02	-	XC6403EX02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX03	-	XC6403EX03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX04	-	XC6403EX04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX05	-	XC6403EX05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX06	-	XC6403EX06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2EX07	-	XC6403EX07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX08	-	XC6403EX08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX09	-	XC6403EX09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX10	-	XC6403EX10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX11	-	XC6403EX11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX12	-	XC6403EX12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX13	-	XC6403EX13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX14	-	XC6403EX14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX15	-	XC6403EX15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX16	-	XC6403EX16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX17	-	XC6403EX17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX18	-	XC6403EX18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX20	-	XC6403EX20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX21	-	XC6403EX21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX22	-	XC6403EX22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX24	-	XC6403EX24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX25	-	XC6403EX25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX30	-	XC6403EX30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX31	-	XC6403EX31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX32	-	XC6403EX32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX33	-	XC6403EX33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX34	-	XC6403EX34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX80	-	XC6403EX80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX81	-	XC6403EX81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX82	-	XC6403EX82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX83	-	XC6403EX83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX84	-	XC6403EX84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX85	-	XC6403EX85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX86	-	XC6403EX86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX87	-	XC6403EX87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EX88	-	XC6403EX88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
2EY01	-	XC6403EY01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY02	-	XC6403EY02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY03	-	XC6403EY03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY04	-	XC6403EY04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY05	-	XC6403EY05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY06	-	XC6403EY06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY07	-	XC6403EY07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY08	-	XC6403EY08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY09	-	XC6403EY09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY10	-	XC6403EY10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY11	-	XC6403EY11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY12	-	XC6403EY12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY13	-	XC6403EY13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY14	-	XC6403EY14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY15	-	XC6403EY15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY16	-	XC6403EY16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY17	-	XC6403EY17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY18	-	XC6403EY18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY20	-	XC6403EY20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY21	-	XC6403EY21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY22	-	XC6403EY22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY24	-	XC6403EY24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY25	-	XC6403EY25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY30	-	XC6403EY30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY31	-	XC6403EY31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY32	-	XC6403EY32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY33	-	XC6403EY33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY34	-	XC6403EY34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY80	-	XC6403EY80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY81	-	XC6403EY81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY82	-	XC6403EY82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY83	-	XC6403EY83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY84	-	XC6403EY84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY85	-	XC6403EY85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY86	-	XC6403EY86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY87	-	XC6403EY87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EY88	-	XC6403EY88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ01	-	XC6403EZ01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ02	-	XC6403EZ02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2EZ03	-	XC6403EZ03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ04	-	XC6403EZ04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ05	-	XC6403EZ05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ06	-	XC6403EZ06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ07	-	XC6403EZ07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ08	-	XC6403EZ08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ09	-	XC6403EZ09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ10	-	XC6403EZ10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ11	-	XC6403EZ11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ12	-	XC6403EZ12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ13	-	XC6403EZ13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ14	-	XC6403EZ14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ15	-	XC6403EZ15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ16	-	XC6403EZ16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ17	-	XC6403EZ17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ18	-	XC6403EZ18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ20	-	XC6403EZ20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ21	-	XC6403EZ21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ22	-	XC6403EZ22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ24	-	XC6403EZ24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ25	-	XC6403EZ25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ30	-	XC6403EZ30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ31	-	XC6403EZ31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ32	-	XC6403EZ32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ33	-	XC6403EZ33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ34	-	XC6403EZ34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ80	-	XC6403EZ80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ81	-	XC6403EZ81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ82	-	XC6403EZ82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ83	-	XC6403EZ83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ84	-	XC6403EZ84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ85	-	XC6403EZ85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ86	-	XC6403EZ86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ87	-	XC6403EZ87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2EZ88	-	XC6403EZ88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
2F	-	R3117K361A	Vdet-IC	3.6V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2F	-	RP100K191D	LVR-IC	LDO, LN, 1.9V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2F	-	RP112K381B	LVR-IC	LDO, 3.8V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
2F	-	RP173K381A	LVR-IC	LDO, 3.8V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2F	-	XC6221C23B7R	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2F	-	XC6223C2519R-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2F	-	XC6224B2317R	LVR-IC	LDO, 2.3V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
2F	-	XC6229H19B1R-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2F8	-	XC9235F08D0R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2F8	-	XC9235F08D4R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2F8	-	XC9235F08DER-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2F9	-	XC9235F09D0R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2F9	-	XC9235F09D4R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2F9	-	XC9235F09DER-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2FL	-	XC9235F0LD0R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2FL	-	XC9235F0LD4R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2FL	-	XC9235F0LDER-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2FM	-	XC9235F0MD0R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2FM	-	XC9235F0MD4R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2FM	-	XC9235F0MDER-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2FV01	-	XC6403FV01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV02	-	XC6403FV02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV03	-	XC6403FV03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV04	-	XC6403FV04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV05	-	XC6403FV05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV06	-	XC6403FV06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV07	-	XC6403FV07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV08	-	XC6403FV08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV09	-	XC6403FV09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV10	-	XC6403FV10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV11	-	XC6403FV11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV12	-	XC6403FV12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV13	-	XC6403FV13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV14	-	XC6403FV14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV15	-	XC6403FV15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2FV16	-	XC6403FV16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV17	-	XC6403FV17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV18	-	XC6403FV18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV20	-	XC6403FV20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV21	-	XC6403FV21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV22	-	XC6403FV22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV24	-	XC6403FV24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV25	-	XC6403FV25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV30	-	XC6403FV30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV31	-	XC6403FV31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV32	-	XC6403FV32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV33	-	XC6403FV33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV34	-	XC6403FV34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV80	-	XC6403FV80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV81	-	XC6403FV81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV82	-	XC6403FV82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV83	-	XC6403FV83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV84	-	XC6403FV84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV85	-	XC6403FV85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV86	-	XC6403FV86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV87	-	XC6403FV87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FV88	-	XC6403FV88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX01	-	XC6403FX01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX02	-	XC6403FX02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX03	-	XC6403FX03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdi=1.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX04	-	XC6403FX04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX05	-	XC6403FX05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX06	-	XC6403FX06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX07	-	XC6403FX07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.9V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX08	-	XC6403FX08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX09	-	XC6403FX09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX10	-	XC6403FX10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX11	-	XC6403FX11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.7V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX12	-	XC6403FX12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX13	-	XC6403FX13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX14	-	XC6403FX14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=3.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX15	-	XC6403FX15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX16	-	XC6403FX16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.9V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX17	-	XC6403FX17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.3V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX18	-	XC6403FX18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.4V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX20	-	XC6403FX20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX21	-	XC6403FX21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi=3.1V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX22	-	XC6403FX22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=3.1V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX24	-	XC6403FX24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.4V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX25	-	XC6403FX25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdi=2.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX30	-	XC6403FX30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdi=4.3V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX31	-	XC6403FX31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.7V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX32	-	XC6403FX32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdi=2.4V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX33	-	XC6403FX33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdi=2.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX34	-	XC6403FX34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=2.55V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX80	-	XC6403FX80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=1.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX81	-	XC6403FX81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdi=3.1V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX82	-	XC6403FX82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdi=2.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX83	-	XC6403FX83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdi=2.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX84	-	XC6403FX84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdi=3.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX85	-	XC6403FX85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi=3.3V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX86	-	XC6403FX86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdi=3.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX87	-	XC6403FX87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdi= 4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FX88	-	XC6403FX88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdi= 4.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY01	-	XC6403FY01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY02	-	XC6403FY02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY03	-	XC6403FY03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY04	-	XC6403FY04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY05	-	XC6403FY05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY06	-	XC6403FY06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY07	-	XC6403FY07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY08	-	XC6403FY08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY09	-	XC6403FY09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY10	-	XC6403FY10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY11	-	XC6403FY11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2FY12	-	XC6403FY12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY13	-	XC6403FY13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY14	-	XC6403FY14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY15	-	XC6403FY15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY16	-	XC6403FY16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY17	-	XC6403FY17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY18	-	XC6403FY18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY20	-	XC6403FY20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY21	-	XC6403FY21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY22	-	XC6403FY22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY24	-	XC6403FY24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY25	-	XC6403FY25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY30	-	XC6403FY30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY31	-	XC6403FY31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY32	-	XC6403FY32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY33	-	XC6403FY33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY34	-	XC6403FY34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY80	-	XC6403FY80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY81	-	XC6403FY81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY82	-	XC6403FY82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY83	-	XC6403FY83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY84	-	XC6403FY84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY85	-	XC6403FY85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY86	-	XC6403FY86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY87	-	XC6403FY87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FY88	-	XC6403FY88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ01	-	XC6403FZ01D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ02	-	XC6403FZ02D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ03	-	XC6403FZ03D	LVR/Vdet-IC	LDO, 1.6V±2%, 300mA, Vdo=1.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ04	-	XC6403FZ04D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ05	-	XC6403FZ05D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ06	-	XC6403FZ06D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ07	-	XC6403FZ07D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.9V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ08	-	XC6403FZ08D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ09	-	XC6403FZ09D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ10	-	XC6403FZ10D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ11	-	XC6403FZ11D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.7V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ12	-	XC6403FZ12D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ13	-	XC6403FZ13D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ14	-	XC6403FZ14D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=3.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ15	-	XC6403FZ15D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ16	-	XC6403FZ16D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.9V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ17	-	XC6403FZ17D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.3V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ18	-	XC6403FZ18D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.4V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ20	-	XC6403FZ20D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ21	-	XC6403FZ21D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo=3.1V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ22	-	XC6403FZ22D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=3.1V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ24	-	XC6403FZ24D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.4V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ25	-	XC6403FZ25D	LVR/Vdet-IC	LDO, 3.2V±2%, 300mA, Vdo=2.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ30	-	XC6403FZ30D	LVR/Vdet-IC	LDO, 4.0V±2%, 300mA, Vdo=4.3V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ31	-	XC6403FZ31D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.7V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ32	-	XC6403FZ32D	LVR/Vdet-IC	LDO, 2.6V±2%, 300mA, Vdo=2.4V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ33	-	XC6403FZ33D	LVR/Vdet-IC	LDO, 2.7V±2%, 300mA, Vdo=2.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ34	-	XC6403FZ34D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=2.55V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ80	-	XC6403FZ80D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=1.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ81	-	XC6403FZ81D	LVR/Vdet-IC	LDO, 2.8V±2%, 300mA, Vdo=3.1V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ82	-	XC6403FZ82D	LVR/Vdet-IC	LDO, 1.8V±2%, 300mA, Vdo=2.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ83	-	XC6403FZ83D	LVR/Vdet-IC	LDO, 2.5V±2%, 300mA, Vdo=2.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ84	-	XC6403FZ84D	LVR/Vdet-IC	LDO, 2.85V±2%, 300mA, Vdo=3.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ85	-	XC6403FZ85D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo=3.3V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ86	-	XC6403FZ86D	LVR/Vdet-IC	LDO, 3.5V±2%, 300mA, Vdo=3.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ87	-	XC6403FZ87D	LVR/Vdet-IC	LDO, 3.0V±2%, 300mA, Vdo= 4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2FZ88	-	XC6403FZ88D	LVR/Vdet-IC	LDO, 3.3V±2%, 300mA, Vdo= 4.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
2G	-	R3117K371A	Vdet-IC	3.7V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2G	-	RP100K201D	LVR-IC	LDO, LN, 2.0V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2G	-	RP112K391B	LVR-IC	LDO, 3.9V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
2G	-	RP173K391A	LVR-IC	LDO, 3.9V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2GA	-	AP6213A-25NHFGU	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GA	-	AP6213A-25NHFPU	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2GA	mg	AP6213A-25NHFGU1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2GA	mg	AP6213A-25NHFPU1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2GB	-	AP6213A-25NLFGU	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GB	-	AP6213A-25NLFPU	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2GB	mg	AP6213A-25NLFGU1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GB	mg	AP6213A-25NLFPU1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2GC	-	AP6213A-25NHNGU	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GC	-	AP6213A-25NHNPU	LVR-IC	LDO, 2.5V±2%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2GC	mg	AP6213A-25NHNGU1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GC	mg	AP6213A-25NHNPU1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2GD	-	AP6213A-25NLNGU	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GD	-	AP6213A-25NLNPU	LVR-IC	LDO, 2.5V±2%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2GD	mg	AP6213A-25NLNGU1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GD	mg	AP6213A-25NLNPU1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2GE	-	AP6213A-25UHFGU	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GE	-	AP6213A-25UHFPU	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2GE	mg	AP6213A-25UHFGU1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GE	mg	AP6213A-25UHFPU1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2GF	-	AP6213A-25ULFGU	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GF	-	AP6213A-25ULFPU	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2GF	mg	AP6213A-25ULFGU1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GF	mg	AP6213A-25ULFPU1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2GG	-	AP6213A-25UHNGU	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GG	-	AP6213A-25UHNPU	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2GG	mg	AP6213A-25UHNGU1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GG	mg	AP6213A-25UHNPU1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2GH	-	AP6213A-25ULNGU	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GH	-	AP6213A-25ULNPU	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2GH	mg	AP6213A-25ULNGU1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GH	mg	AP6213A-25ULNPU1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2GJ	-	AP6213A-25DHFGU	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GJ	-	AP6213A-25DHFPU	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2GJ	mg	AP6213A-25DHFGU1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GJ	mg	AP6213A-25DHFPU1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2GK	-	AP6213A-25DLFGU	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GK	-	AP6213A-25DLFPU	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2GK	mg	AP6213A-25DLFGU1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GK	mg	AP6213A-25DLFPU1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2GL	-	AP6213A-25DHNGU	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GL	-	AP6213A-25DHNPU	LVR-IC	LDO, 2.5V±2%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2GL	mg	AP6213A-25DHNGU1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GL	mg	AP6213A-25DHNPU1	LVR-IC	LDO, 2.5V±1%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2GM	-	AP6213A-25DLNGU	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GM	-	AP6213A-25DLNPU	LVR-IC	LDO, 2.5V±2%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2GM	mg	AP6213A-25DLNGU1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2GM	mg	AP6213A-25DLNPU1	LVR-IC	LDO, 2.5V±1%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2H	-	R3117K381A	Vdet-IC	3.8V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2H	-	RP100K251D	LVR-IC	LDO, LN, 2.5V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2H	-	RP112K401B	LVR-IC	LDO, 4.0V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
2H	-	RP173K401A	LVR-IC	LDO, 4.0V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2H	-	XC6221C24B7R	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2H	-	XC6223C2619R-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2H	-	XC6224B2417R	LVR-IC	LDO, 2.4V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
2H	-	XC6229H2011R-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2H0	-	XC9235F10D0R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2H0	-	XC9235F10D4R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2H0	-	XC9235F10DER-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2H1	-	XC9235F11D0R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2H1	-	XC9235F11D4R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2H1	-	XC9235F11DER-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2H2	-	XC9235F12D0R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2H2	-	XC9235F12D4R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2H2	-	XC9235F12DER-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2H3	-	XC9235F13D0R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2H3	-	XC9235F13D4R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2H3	-	XC9235F13DER-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2H4	-	XC9235F14D0R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2H4	-	XC9235F14D4R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2H4	-	XC9235F14DER-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2H5	-	XC9235F15D0R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2H5	-	XC9235F15D4R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2H5	-	XC9235F15DER-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2H6	-	XC9235F16D0R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2H6	-	XC9235F16D4R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2H6	-	XC9235F16DER-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2H7	-	XC9235F17D0R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2H7	-	XC9235F17D4R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2H7	-	XC9235F17DER-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2H8	-	XC9235F18D0R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2H8	-	XC9235F18D4R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2H8	-	XC9235F18DER-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2H9	-	XC9235F19D0R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2H9	-	XC9235F19D4R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2H9	-	XC9235F19DER-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2HA	-	XC9235F1AD0R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2HA	-	XC9235F1AD4R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2HA	-	XC9235F1ADER-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2HB	-	XC9235F1BD0R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2HB	-	XC9235F1BD4R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2HB	-	XC9235F1BDER-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2HC	-	XC9235F1CD0R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2HC	-	XC9235F1CD4R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2HC	-	XC9235F1CDER-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2HD	-	XC9235F1DD0R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2HD	-	XC9235F1DD4R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2HD	-	XC9235F1DDER-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2HE	-	XC9235F1ED0R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2HE	-	XC9235F1ED4R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2HE	-	XC9235F1EDER-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2HF	-	XC9235F1FD0R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2HF	-	XC9235F1FD4R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2HF	-	XC9235F1FDER-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2HH	-	XC9235F1HD0R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2HH	-	XC9235F1HD4R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2HH	-	XC9235F1HDER-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2HK	-	XC9235F1KD0R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2HK	-	XC9235F1KD4R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2HK	-	XC9235F1KDER-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2HL	-	XC9235F1LD0R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2HL	-	XC9235F1LD4R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2HL	-	XC9235F1LDER-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2HM	-	XC9235F1MD0R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2HM	-	XC9235F1MD4R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2HM	-	XC9235F1MDER-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2i	-	BU32UA3WNVX	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
2J	-	R3117K391A	Vdet-IC	3.9V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2J	-	RP100K261D	LVR-IC	LDO, LN, 2.6V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2J	-	RP112K411B	LVR-IC	LDO, 4.1V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
2J	-	RP173K411A	LVR-IC	LDO, 4.1V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2K	-	R3117K401A	Vdet-IC	4.0V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2K	-	RP100K271D	LVR-IC	LDO, LN, 2.7V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2K	-	RP112K421B	LVR-IC	LDO, 4.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
2K	-	RP173K421A	LVR-IC	LDO, 4.2V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2K	-	XC6221C25B7R	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2K	-	XC6223C2719R-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2K	-	XC6224B2517R	LVR-IC	LDO, 2.5V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
2K	-	XC6229H20B1R-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2K0	-	XC9235F20D0R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2K0	-	XC9235F20D4R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2K0	-	XC9235F20DER-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2K1	-	XC9235F21D0R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2K1	-	XC9235F21D4R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2K1	-	XC9235F21DER-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2K2	-	XC9235F22D0R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2K2	-	XC9235F22D4R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2K2	-	XC9235F22DER-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2K3	-	XC9235F23D0R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2K3	-	XC9235F23D4R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2K3	-	XC9235F23DER-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2K4	-	XC9235F24D0R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2K4	-	XC9235F24D4R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2K4	-	XC9235F24DER-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2K5	-	XC9235F25D0R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2K5	-	XC9235F25D4R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2K5	-	XC9235F25DER-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2K6	-	XC9235F26D0R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2K6	-	XC9235F26D4R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2K6	-	XC9235F26DER-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2K7	-	XC9235F27D0R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2K7	-	XC9235F27D4R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2K7	-	XC9235F27DER-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2K8	-	XC9235F28D0R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2K8	-	XC9235F28D4R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2K8	-	XC9235F28DER-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2K9	-	XC9235F29D0R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2K9	-	XC9235F29D4R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2K9	-	XC9235F29DER-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2KA	-	XC9235F2AD0R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2KA	-	XC9235F2AD4R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2KA	-	XC9235F2ADER-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2KB	-	XC9235F2BD0R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2KB	-	XC9235F2BD4R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2KB	-	XC9235F2BDER-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2KC	-	XC9235F2CD0R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2KC	-	XC9235F2CD4R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2KC	-	XC9235F2CDER-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2KD	-	XC9235F2DD0R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2KD	-	XC9235F2DD4R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2KD	-	XC9235F2DDER-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2KE	-	XC9235F2ED0R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2KE	-	XC9235F2ED4R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2KE	-	XC9235F2EDER-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2KF	-	XC9235F2FD0R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2KF	-	XC9235F2FD4R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2KF	-	XC9235F2FDER-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2KH	-	XC9235F2HD0R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2KH	-	XC9235F2HD4R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2KH	-	XC9235F2HDER-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2KK	-	XC9235F2KD0R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2KK	-	XC9235F2KD4R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2KK	-	XC9235F2KDER-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2KL	-	XC9235F2LD0R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2KL	-	XC9235F2LD4R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2KL	-	XC9235F2LDER-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2KM	-	XC9235F2MD0R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2KM	-	XC9235F2MD4R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2KM	-	XC9235F2MDER-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2L	-	MIC5380-2.7/2.7YFT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.7V±2%, 150mA, +CE	MLF-6A	81g5	VR19	9x	Mcr
2L	-	R3117K411A	Vdet-IC	4.1V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2L	-	RP100K281D	LVR-IC	LDO, LN, 2.8V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2L	-	RP112K431B	LVR-IC	LDO, 4.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
2L	-	RP173K431A	LVR-IC	LDO, 4.3V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2L	-	XC6221C26B7R	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2L	-	XC6223C2819R-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2L	-	XC6224B2617R	LVR-IC	LDO, 2.6V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
2L	-	XC6229H2111R-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2L0	-	XC9235F30D0R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2L0	-	XC9235F30D4R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2L0	-	XC9235F30DER-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2L1	-	XC9235F31D0R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2L1	-	XC9235F31D4R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2L1	-	XC9235F31DER-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2L2	-	XC9235F32D0R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2L2	-	XC9235F32D4R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2L2	-	XC9235F32DER-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2L3	-	XC9235F33D0R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2L3	-	XC9235F33D4R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2L3	-	XC9235F33DER-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2L4	-	XC9235F34D0R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2L4	-	XC9235F34D4R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2L4	-	XC9235F34DER-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2L5	-	XC9235F35D0R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2L5	-	XC9235F35D4R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2L5	-	XC9235F35DER-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2L6	-	XC9235F36D0R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2L6	-	XC9235F36D4R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2L6	-	XC9235F36DER-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2L7	-	XC9235F37D0R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2L7	-	XC9235F37D4R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2L7	-	XC9235F37DER-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2L8	-	XC9235F38D0R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2L8	-	XC9235F38D4R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2L8	-	XC9235F38DER-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2L9	-	XC9235F39D0R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2L9	-	XC9235F39D4R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2L9	-	XC9235F39DER-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2LA	-	AP6213A-2JNHFGU	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LA	-	AP6213A-2JNHFPU	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2LA	-	XC9235F3AD0R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2LA	-	XC9235F3AD4R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2LA	-	XC9235F3ADER-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2LA	mg	AP6213A-2JNHFGU1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LA	mg	AP6213A-2JNHFPU1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2LB	-	AP6213A-2JNLFGU	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LB	-	AP6213A-2JNLFPU	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2LB	-	XC9235F3BD0R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2LB	-	XC9235F3BD4R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2LB	-	XC9235F3BDER-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2LB	mg	AP6213A-2JNLFGU1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LB	mg	AP6213A-2JNLFPU1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2LC	-	AP6213A-2JNHNGU	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LC	-	AP6213A-2JNHNPU	LVR-IC	LDO, 2.85V±2%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2LC	-	XC9235F3CD0R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2LC	-	XC9235F3CD4R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2LC	-	XC9235F3CDER-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2LC	mg	AP6213A-2JNHNGU1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LC	mg	AP6213A-2JNHNPU1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2LD	-	AP6213A-2JNLNGU	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LD	-	AP6213A-2JNLNPU	LVR-IC	LDO, 2.85V±2%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2LD	-	XC9235F3DD0R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2LD	-	XC9235F3DD4R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2LD	-	XC9235F3DDER-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2LD	mg	AP6213A-2JNLNGU1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LD	mg	AP6213A-2JNLNPU1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2LE	-	AP6213A-2JUHFGU	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LE	-	AP6213A-2JUHFPU	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2LE	-	XC9235F3ED0R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2LE	-	XC9235F3ED4R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2LE	-	XC9235F3EDER-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2LE	mg	AP6213A-2JUHFGU1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LE	mg	AP6213A-2JUHFPU1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2LF	-	AP6213A-2JULFGU	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LF	-	AP6213A-2JULFPU	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2LF	-	XC9235F3FD0R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2LF	-	XC9235F3FD4R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2LF	-	XC9235F3FDER-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2LF	mg	AP6213A-2JULFGU1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LF	mg	AP6213A-2JULFPU1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2LG	-	AP6213A-2JUHNGU	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LG	-	AP6213A-2JUHNPU	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2LG	mg	AP6213A-2JUHNGU1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LG	mg	AP6213A-2JUHNPU1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2LH	-	AP6213A-2JULNGU	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LH	-	AP6213A-2JULNPU	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2LH	-	XC9235F3HD0R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2LH	-	XC9235F3HD4R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2LH	-	XC9235F3HDER-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2LH	mg	AP6213A-2JULNGU1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LH	mg	AP6213A-2JULNPU1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2LJ	-	AP6213A-2JDHFGU	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LJ	-	AP6213A-2JDHFPU	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2LJ	mg	AP6213A-2JDHFGU1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LJ	mg	AP6213A-2JDHFPU1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2LK	-	AP6213A-2JDLFGU	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LK	-	AP6213A-2JDLFPU	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2LK	-	XC9235F3KD0R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2LK	-	XC9235F3KD4R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2LK	-	XC9235F3KDER-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2LK	mg	AP6213A-2JDLFGU1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LK	mg	AP6213A-2JDLFPU1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2LL	-	AP6213A-2JDHNGU	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LL	-	AP6213A-2JDHNPU	LVR-IC	LDO, 2.85V±2%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2LL	-	XC9235F3LD0R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2LL	-	XC9235F3LD4R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2LL	-	XC9235F3LDER-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2LL	mg	AP6213A-2JDHNGU1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LL	mg	AP6213A-2JDHNPU1	LVR-IC	LDO, 2.85V±1%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2LM	-	AP6213A-2JDLNGU	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LM	-	AP6213A-2JDLNPU	LVR-IC	LDO, 2.85V±2%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2LM	-	XC9235F3MD0R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2LM	-	XC9235F3MD4R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2LM	-	XC9235F3MDER-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2LM	mg	AP6213A-2JDLNGU1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2LM	mg	AP6213A-2JDLNPU1	LVR-IC	LDO, 2.85V±1%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2M	-	R3117K421A	Vdet-IC	4.2V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2M	-	RP100K281D5	LVR-IC	LDO, LN, 2.85V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2M	-	RP112K441B	LVR-IC	LDO, 4.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
2M	-	RP173K441A	LVR-IC	LDO, 4.4V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2M	-	XC6221C27B7R	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2M	-	XC6223C2919R-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2M	-	XC6224B2717R	LVR-IC	LDO, 2.7V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
2M	-	XC6229H21B1R-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2M0	-	XC9235F40D0R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
2M0	-	XC9235F40D4R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
2M0	-	XC9235F40DER-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
2MA	-	AP6213A-30NHFGU	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MA	-	AP6213A-30NHFPU	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2MA	mg	AP6213A-30NHFGU1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MA	mg	AP6213A-30NHFPU1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2MB	-	AP6213A-30NLFGU	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MB	-	AP6213A-30NLFPU	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2MB	mg	AP6213A-30NLFGU1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MB	mg	AP6213A-30NLFPU1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2MC	-	AP6213A-30NHNGU	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MC	-	AP6213A-30NHNPU	LVR-IC	LDO, 3.0V±2%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2MC	mg	AP6213A-30NHNGU1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MC	mg	AP6213A-30NHNPU1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2MD	-	AP6213A-30NLNGU	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MD	-	AP6213A-30NLNPU	LVR-IC	LDO, 3.0V±2%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2MD	mg	AP6213A-30NLNGU1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MD	mg	AP6213A-30NLNPU1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2ME	-	AP6213A-30UHFGU	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ME	-	AP6213A-30UHFPU	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2ME	mg	AP6213A-30UHFGU1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ME	mg	AP6213A-30UHFPU1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2MF	-	AP6213A-30ULFGU	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MF	-	AP6213A-30ULFPU	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2MF	mg	AP6213A-30ULFGU1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MF	mg	AP6213A-30ULFPU1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2MG	-	AP6213A-30UHNGU	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MG	-	AP6213A-30UHNPU	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2MG	mg	AP6213A-30UHNGU1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MG	mg	AP6213A-30UHNPU1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2MH	-	AP6213A-30ULNGU	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MH	-	AP6213A-30ULNPU	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2MH	mg	AP6213A-30ULNGU1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MH	mg	AP6213A-30ULNPU1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2MJ	-	AP6213A-30DHFGU	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MJ	-	AP6213A-30DHFPU	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2MJ	mg	AP6213A-30DHFGU1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MJ	mg	AP6213A-30DHFPU1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2MK	-	AP6213A-30DLFGU	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MK	-	AP6213A-30DLFPU	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2MK	mg	AP6213A-30DLFGU1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MK	mg	AP6213A-30DLFPU1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2ML	-	AP6213A-30DHNGU	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ML	-	AP6213A-30DHNPU	LVR-IC	LDO, 3.0V±2%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2ML	mg	AP6213A-30DHNGU1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ML	mg	AP6213A-30DHNPU1	LVR-IC	LDO, 3.0V±1%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2MM	-	AP6213A-30DLNGU	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MM	-	AP6213A-30DLNPU	LVR-IC	LDO, 3.0V±2%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2MM	mg	AP6213A-30DLNGU1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2MM	mg	AP6213A-30DLNPU1	LVR-IC	LDO, 3.0V±1%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2N	-	R3117K431A	Vdet-IC	4.3V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2N	-	RP100K291D	LVR-IC	LDO, LN, 2.9V±0.8%, 200mA	PLP1612-4	45vm	VR4	9a	Ric
2N	-	RP112K451B	LVR-IC	LDO, 4.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
2N	-	RP173K451A	LVR-IC	LDO, 4.5V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2N	-	XC6221C28B7R	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2N	-	XC6223C3019R-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2N	-	XC6224B2817R	LVR-IC	LDO, 2.8V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
2N	-	XC6229H2211R-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2NA	-	AP6213A-32NHFGU	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NA	-	AP6213A-32NHFPU	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2NA	mg	AP6213A-32NHFGU1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NA	mg	AP6213A-32NHFPU1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2NB	-	AP6213A-32NLFGU	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NB	-	AP6213A-32NLFPU	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2NB	mg	AP6213A-32NLFGU1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NB	mg	AP6213A-32NLFPU1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2NC	-	AP6213A-32NHNGU	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NC	-	AP6213A-32NHNPU	LVR-IC	LDO, 3.1V±2%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2NC	mg	AP6213A-32NHNGU1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NC	mg	AP6213A-32NHNPU1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2ND	-	AP6213A-32NLNGU	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ND	-	AP6213A-32NLNPU	LVR-IC	LDO, 3.1V±2%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2ND	mg	AP6213A-32NLNGU1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ND	mg	AP6213A-32NLNPU1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2NE	-	AP6213A-32UHFGU	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NE	-	AP6213A-32UHFPU	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2NE	mg	AP6213A-32UHFGU1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NE	mg	AP6213A-32UHFPU1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2NF	-	AP6213A-32ULFGU	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NF	-	AP6213A-32ULFPU	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2NF	mg	AP6213A-32ULFGU1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NF	mg	AP6213A-32ULFPU1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2NG	-	AP6213A-32UHNGU	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NG	-	AP6213A-32UHNPU	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2NG	mg	AP6213A-32UHNGU1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NG	mg	AP6213A-32UHNPU1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2NH	-	AP6213A-32ULNGU	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NH	-	AP6213A-32ULNPU	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2NH	mg	AP6213A-32ULNGU1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NH	mg	AP6213A-32ULNPU1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2NJ	-	AP6213A-32DHFGU	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NJ	-	AP6213A-32DHFPU	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2NJ	mg	AP6213A-32DHFGU1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NJ	mg	AP6213A-32DHFPU1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2NK	-	AP6213A-32DLFGU	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NK	-	AP6213A-32DLFPU	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2NK	mg	AP6213A-32DLFGU1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NK	mg	AP6213A-32DLFPU1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2NL	-	AP6213A-32DHNGU	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NL	-	AP6213A-32DHNPU	LVR-IC	LDO, 3.1V±2%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2NL	mg	AP6213A-32DHNGU1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NL	mg	AP6213A-32DHNPU1	LVR-IC	LDO, 3.1V±1%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2NM	-	AP6213A-32DLNGU	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NM	-	AP6213A-32DLNPU	LVR-IC	LDO, 3.1V±2%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2NM	mg	AP6213A-32DLNGU1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2NM	mg	AP6213A-32DLNPU1	LVR-IC	LDO, 3.1V±1%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2P	-	MIC5380-3.0/3.0YFT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 150mA, +CE	MLF-6A	81g5	VR19	9x	Mcr
2P	-	R3117K441A	Vdet-IC	4.4V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2P	-	RP100K301D	LVR-IC	LDO, LN, 3.0V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2P	-	RP112K461B	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
2P	-	RP173K461A	LVR-IC	LDO, 4.6V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2P	-	XC6221C29B7R	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2P	-	XC6223C3119R-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2P	-	XC6224B2917R	LVR-IC	LDO, 2.9V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
2P	-	XC6229H22B1R-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2Q	-	R3117K451A	Vdet-IC	4.5V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2Q	-	RP100K311D	LVR-IC	LDO, LN, 3.1V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2Q	-	RP112K471B	LVR-IC	LDO, 4.7V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
2Q	-	RP173K471A	LVR-IC	LDO, 4.7V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2QA	-	AP6213A-33NHFGU	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QA	-	AP6213A-33NHFPU	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2QA	mg	AP6213A-33NHFGU1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QA	mg	AP6213A-33NHFPU1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2QB	-	AP6213A-33NLFGU	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QB	-	AP6213A-33NLFPU	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2QB	mg	AP6213A-33NLFGU1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QB	mg	AP6213A-33NLFPU1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2QC	-	AP6213A-33NHNGU	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QC	-	AP6213A-33NHNPU	LVR-IC	LDO, 3.3V±2%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2QC	mg	AP6213A-33NHNGU1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QC	mg	AP6213A-33NHNPU1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2QD	-	AP6213A-33NLNGU	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QD	-	AP6213A-33NLNPU	LVR-IC	LDO, 3.3V±2%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2QD	mg	AP6213A-33NLNGU1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QD	mg	AP6213A-33NLNPU1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2QE	-	AP6213A-33UHFGU	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QE	-	AP6213A-33UHFPU	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2QE	mg	AP6213A-33UHFGU1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QE	mg	AP6213A-33UHFPU1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2QF	-	AP6213A-33ULFGU	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QF	-	AP6213A-33ULFPU	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2QF	mg	AP6213A-33ULFGU1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QF	mg	AP6213A-33ULFPU1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2QG	-	AP6213A-33UHNGU	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QG	-	AP6213A-33UHNPU	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2QG	mg	AP6213A-33UHNGU1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QG	mg	AP6213A-33UHNPU1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2QH	-	AP6213A-33ULNGU	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QH	-	AP6213A-33ULNPU	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2QH	mg	AP6213A-33ULNGU1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QH	mg	AP6213A-33ULNPU1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2QJ	-	AP6213A-33DHFGU	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QJ	-	AP6213A-33DHFPU	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2QJ	mg	AP6213A-33DHFGU1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QJ	mg	AP6213A-33DHFPU1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2QK	-	AP6213A-33DLFGU	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QK	-	AP6213A-33DLFPU	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2QK	mg	AP6213A-33DLFGU1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QK	mg	AP6213A-33DLFPU1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2QL	-	AP6213A-33DHNGU	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QL	-	AP6213A-33DHNPU	LVR-IC	LDO, 3.3V±2%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2QL	mg	AP6213A-33DHNGU1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QL	mg	AP6213A-33DHNPU1	LVR-IC	LDO, 3.3V±1%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2QM	-	AP6213A-33DLNGU	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QM	-	AP6213A-33DLNPU	LVR-IC	LDO, 3.3V±2%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2QM	mg	AP6213A-33DLNGU1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2QM	mg	AP6213A-33DLNPU1	LVR-IC	LDO, 3.3V±1%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2R	-	R3117K461A	Vdet-IC	4.6V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2R	-	RP100K331D	LVR-IC	LDO, LN, 3.3V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2R	-	RP112K481B	LVR-IC	LDO, 4.8V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
2R	-	RP173K481A	LVR-IC	LDO, 4.8V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2R	-	XC6221C30B7R	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2R	-	XC6223C3219R-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2R	-	XC6224B3017R	LVR-IC	LDO, 3.0V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
2R	-	XC6229H2311R-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2S	-	R3117K471A	Vdet-IC	4.7V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2S	-	RP100K211D	LVR-IC	LDO, LN, 2.1V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2S	-	RP173K491A	LVR-IC	LDO, 4.9V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2S	-	XC6221C31B7R	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2S	-	XC6223C3319R-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2S	-	XC6229H23B1R-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2T	-	R3117K481A	Vdet-IC	4.8V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2T	-	RP100K121D5	LVR-IC	LDO, LN, 1.25V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2T	-	RP173K501A	LVR-IC	LDO, 5.0V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2T	-	XC6221C32B7R	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2T	-	XC6223C3419R-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2T	-	XC6229H2411R-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2U	-	R3117K491A	Vdet-IC	4.9V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2U	-	RP100K241D	LVR-IC	LDO, LN, 2.4V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2U	-	RP173K511A	LVR-IC	LDO, 5.1V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2U	-	XC6221C33B7R	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2U	-	XC6223C3519R-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2U	-	XC6229H24B1R-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2V	-	R3117K501A	Vdet-IC	5.0V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
2V	-	RP100K221D	LVR-IC	LDO, LN, 2.2V±0.8%, 200mA, +CE, CL	PLP1612-4	45vm	VR4	9a	Ric
2V	-	RP173K521A	LVR-IC	LDO, 5.2V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2V	-	XC6221C34B7R	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2V	-	XC6223C3619R-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2V	-	XC6229H2511R-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2VA	-	AP6213A-36NHFGU	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VA	-	AP6213A-36NHFPU	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2VA	mg	AP6213A-36NHFGU1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VA	mg	AP6213A-36NHFPU1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2VB	-	AP6213A-36NLFGU	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VB	-	AP6213A-36NLFPU	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2VB	mg	AP6213A-36NLFGU1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VB	mg	AP6213A-36NLFPU1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2VC	-	AP6213A-36NHNGU	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VC	-	AP6213A-36NHNPU	LVR-IC	LDO, 3.6V±2%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2VC	mg	AP6213A-36NHNGU1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VC	mg	AP6213A-36NHNPU1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2VD	-	AP6213A-36NLNGU	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VD	-	AP6213A-36NLNPU	LVR-IC	LDO, 3.6V±2%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2VD	mg	AP6213A-36NLNGU1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VD	mg	AP6213A-36NLNPU1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2VE	-	AP6213A-36UHFGU	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VE	-	AP6213A-36UHFPU	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2VE	mg	AP6213A-36UHFGU1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VE	mg	AP6213A-36UHFPU1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2VF	-	AP6213A-36ULFGU	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VF	-	AP6213A-36ULFPU	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2VF	mg	AP6213A-36ULFGU1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VF	mg	AP6213A-36ULFPU1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2VG	-	AP6213A-36UHNGU	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VG	-	AP6213A-36UHNPU	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2VG	mg	AP6213A-36UHNGU1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VG	mg	AP6213A-36UHNPU1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2VH	-	AP6213A-36ULNGU	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VH	-	AP6213A-36ULNPU	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2VH	mg	AP6213A-36ULNGU1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VH	mg	AP6213A-36ULNPU1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2VJ	-	AP6213A-36DHFGU	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VJ	-	AP6213A-36DHFPU	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2VJ	mg	AP6213A-36DHFGU1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VJ	mg	AP6213A-36DHFPU1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2VK	-	AP6213A-36DLFGU	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VK	-	AP6213A-36DLFPU	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2VK	mg	AP6213A-36DLFGU1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VK	mg	AP6213A-36DLFPU1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2VL	-	AP6213A-36DHNGU	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VL	-	AP6213A-36DHNPU	LVR-IC	LDO, 3.6V±2%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2VL	mg	AP6213A-36DHNGU1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VL	mg	AP6213A-36DHNPU1	LVR-IC	LDO, 3.6V±1%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2VM	-	AP6213A-36DLNGU	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VM	-	AP6213A-36DLNPU	LVR-IC	LDO, 3.6V±2%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2VM	mg	AP6213A-36DLNGU1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2VM	mg	AP6213A-36DLNPU1	LVR-IC	LDO, 3.6V±1%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2W	-	RP173K531A	LVR-IC	LDO, 5.3V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
2X	-	RP173K541A	LVR-IC	LDO, 5.4V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2X	-	UNRF1A5	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1=10k	ML3	22ta	-	2b	Pan
2X	-	XC6221C35B7R	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2X	-	XC6223C3719R-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2X	-	XC6229H25B1R-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2Y	-	RP173K551A	LVR-IC	LDO, 5.5V±1%, 150mA, -CE	DFN1010-4	48vm	VR4	9a	Ric
2Y	-	UNRF2A4	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=10k47k	ML3	22ta	-	2b	Pan
2Y	-	XC6221C36B7R	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2Y	-	XC6223C3819R-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2Y	-	XC6229H2611R-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
2Z	-	UNRF2AM	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=2k2/47k	ML3	22ta	-	2b	Pan
2Z	-	XC6221C37B7R	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
2Z	-	XC6223C3919R-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
2ZA	-	AP6213A-50NHFGU	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZA	-	AP6213A-50NHFPU	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2ZA	mg	AP6213A-50NHFGU1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZA	mg	AP6213A-50NHFPU1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2ZB	-	AP6213A-50NLFGU	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZB	-	AP6213A-50NLFPU	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2ZB	mg	AP6213A-50NLFGU1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZB	mg	AP6213A-50NLFPU1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, CL fast	UFN-6	56hq	VR4	9ib	Anw
2ZC	-	AP6213A-50NHNGU	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZC	-	AP6213A-50NHNPU	LVR-IC	LDO, 5.0V±2%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2ZC	mg	AP6213A-50NHNGU1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZC	mg	AP6213A-50NHNPU1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE	UFN-6	56hq	VR4	9ib	Anw
2ZD	-	AP6213A-50NLNGU	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZD	-	AP6213A-50NLNPU	LVR-IC	LDO, 5.0V±2%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2ZD	mg	AP6213A-50NLNGU1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZD	mg	AP6213A-50NLNPU1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE	UFN-6	56hq	VR4	9ib	Anw
2ZE	-	AP6213A-50UHFGU	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZE	-	AP6213A-50UHFPU	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2ZE	mg	AP6213A-50UHFGU1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZE	mg	AP6213A-50UHFPU1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2ZF	-	AP6213A-50ULFGU	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZF	-	AP6213A-50ULFPU	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2ZF	mg	AP6213A-50ULFGU1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZF	mg	AP6213A-50ULFPU1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2ZG	-	AP6213A-50UHNGU	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZG	-	AP6213A-50UHNPU	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2ZG	mg	AP6213A-50UHNGU1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZG	mg	AP6213A-50UHNPU1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2ZH	-	AP6213A-50ULNGU	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZH	-	AP6213A-50ULNPU	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2ZH	mg	AP6213A-50ULNGU1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZH	mg	AP6213A-50ULNPU1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
2ZJ	-	AP6213A-50DHFGU	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZJ	-	AP6213A-50DHFPU	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2ZJ	mg	AP6213A-50DHFGU1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZJ	mg	AP6213A-50DHFPU1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2ZK	-	AP6213A-50DLFGU	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZK	-	AP6213A-50DLFPU	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2ZK	mg	AP6213A-50DLFGU1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR, CL fast, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZK	mg	AP6213A-50DLFPU1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR, CL fast	UFN-6	56hq	VR4	9ib	Anw
2ZL	-	AP6213A-50DHNGU	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZL	-	AP6213A-50DHNPU	LVR-IC	LDO, 5.0V±2%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2ZL	mg	AP6213A-50DHNGU1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZL	mg	AP6213A-50DHNPU1	LVR-IC	LDO, 5.0V±1%, 300mA. +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2ZM	-	AP6213A-50DLNGU	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZM	-	AP6213A-50DLNPU	LVR-IC	LDO, 5.0V±2%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
2ZM	mg	AP6213A-50DLNGU1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
2ZM	mg	AP6213A-50DLNPU1	LVR-IC	LDO, 5.0V±1%, 300mA. -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3	-	NLU1G32MU	CMOS-Log	2-input OR gate	UDFN-6	57	Log4	9d	Ons
30	-	RP110L351B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
30	-	XC6221C38B7R	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
30	-	XC6224B08B7R	LVR-IC	LDO, 0.85V±20mV, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
30	-	XC6229H26B1R-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
30	-	XC6420AB307R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.30/2.80V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
30	-	XC6420AB30DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.30/2.80V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
30E	-	XC6505A151ER	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
30F	-	XC6505A161ER	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
30H	-	XC6505A171ER	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
30K	-	XC6505A181ER	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
30L	-	XC6505A191ER	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
30M	-	XC6505A201ER	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
30N	-	XC6505A211ER	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
30P	-	XC6505A221ER	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
30R	-	XC6505A231ER	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
30S	-	XC6505A241ER	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
30T	-	XC6505A251ER	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
30U	-	XC6505A261ER	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
30V	-	XC6505A271ER	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
30X	-	XC6505A281ER	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
30Y	-	XC6505A291ER	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
30Z	-	XC6505A301ER	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
31	-	CHT5663M1PT	Si-npn	AF, Sw, 12V, 500mA, B=270..680, 320MHz	FBPT-723	17ta	-	9a	Chm
31	-	RP110L361B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
31	-	XC6221C39B7R	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
31	-	XC6224B09B7R	LVR-IC	LDO, 0.95V±20mV, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
31	-	XC6229H2711R-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
31	-	XC6420AB317R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.80V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
31	-	XC6420AB31DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.80V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
310	-	XC6505A311ER	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
311	-	XC6505A321ER	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
312	-	XC6505A331ER	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
313	-	XC6505A341ER	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
314	-	XC6505A351ER	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
315	-	XC6505A361ER	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
316	-	XC6505A371ER	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
317	-	XC6505A381ER	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
318	-	XC6505A391ER	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
319	-	XC6505A401ER	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
31A	-	XC6505A411ER	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
31B	-	XC6505A421ER	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
31C	-	XC6505A431ER	LVR-IC	LDO, 4.3V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
31D	-	XC6505A441ER	LVR-IC	LDO, 4.4V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
31E	-	XC6505A451ER	LVR-IC	LDO, 4.5V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
31F	-	XC6505A461ER	LVR-IC	LDO, 4.6V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
31H	-	XC6505A471ER	LVR-IC	LDO, 4.7V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
31K	-	XC6505A481ER	LVR-IC	LDO, 4.8V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
31L	-	XC6505A491ER	LVR-IC	LDO, 4.9V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
31M	-	XC6505A501ER	LVR-IC	LDO, 5.0V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
32	-	CH3904M1PT	Si-npn	AF, Sw, 40V, 200mA, B=100..300, 300MHz	FBPT-723	17ta	-	9a	Chm
32	-	RP110L081C	LVR-IC	LDO, 0.8V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
32	-	XC6221C40B7R	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
32	-	XC6223D1219R-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
32	-	XC6224B10B7R	LVR-IC	LDO, 1.05V±20mV, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
32	-	XC6229H27B1R-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
32	-	XC6420AB327R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/2.80V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
32	-	XC6420AB32DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/2.80V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
320	-	XC6505A611ER	LVR-IC	LDO, 6.1V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
321	-	XC6505A621ER	LVR-IC	LDO, 6.2V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
322	-	XC6505A631ER	LVR-IC	LDO, 6.3V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
323	-	XC6505A641ER	LVR-IC	LDO, 6.4V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
324	-	XC6505A651ER	LVR-IC	LDO, 6.5V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
325	-	XC6505A661ER	LVR-IC	LDO, 6.6V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
326	-	XC6505A671ER	LVR-IC	LDO, 6.7V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
327	-	XC6505A681ER	LVR-IC	LDO, 6.8V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
328	-	XC6505A691ER	LVR-IC	LDO, 6.9V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
329	-	XC6505A701ER	LVR-IC	LDO, 7.0V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
32N	-	XC6505A511ER	LVR-IC	LDO, 5.1V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
32P	-	XC6505A521ER	LVR-IC	LDO, 5.2V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
32R	-	XC6505A531ER	LVR-IC	LDO, 5.3V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
32S	-	XC6505A541ER	LVR-IC	LDO, 5.4V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
32T	-	XC6505A551ER	LVR-IC	LDO, 5.5V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
32U	-	XC6505A561ER	LVR-IC	LDO, 5.6V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
32V	-	XC6505A571ER	LVR-IC	LDO, 5.7V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
32X	-	XC6505A581ER	LVR-IC	LDO, 5.8V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
32Y	-	XC6505A591ER	LVR-IC	LDO, 5.9V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
32Z	-	XC6505A601ER	LVR-IC	LDO, 6.0V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
33	-	RP110L091C	LVR-IC	LDO, 0.9V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
33	-	XC6221C41B7R	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
33	-	XC6223D1319R-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
33	-	XC6224B11B7R	LVR-IC	LDO, 1.15V±20mV, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
33	-	XC6229H2811R-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
33	-	XC6420AB337R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/2.80V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
33	-	XC6420AB33DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/2.80V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
33A	-	XC6505A711ER	LVR-IC	LDO, 7.1V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
33B	-	XC6505A721ER	LVR-IC	LDO, 7.2V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
33C	-	XC6505A731ER	LVR-IC	LDO, 7.3V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
33D	-	XC6505A741ER	LVR-IC	LDO, 7.4V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
33E	-	XC6505A751ER	LVR-IC	LDO, 7.5V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
33F	-	XC6505A761ER	LVR-IC	LDO, 7.6V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
33H	-	XC6505A771ER	LVR-IC	LDO, 7.7V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
33K	-	XC6505A781ER	LVR-IC	LDO, 7.8V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
33L	-	XC6505A791ER	LVR-IC	LDO, 7.9V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
33M	-	XC6505A801ER	LVR-IC	LDO, 8.0V±1%, 200mA, +CE	USP-6C	49hq	VR4	9a	Tor
34	-	RP110L101C	LVR-IC	LDO, 1.0V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
34	-	XC6221C42B7R	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
34	-	XC6223D1419R-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
34	-	XC6224B12B7R	LVR-IC	LDO, 1.25V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
34	-	XC6229H28B1R-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
34	-	XC6420AB347R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/3.00V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
34	-	XC6420AB34DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/3.00V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
34A	-	AP6233A-10NHFGU	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34A	-	AP6233A-10NHFPU	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
34A	mg	AP6233A-10NHFGU1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34A	mg	AP6233A-10NHFPU1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
34A10	-	LN1134A102DR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A11	-	LN1134A112DR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A12	-	LN1134A122DR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A13	-	LN1134A132DR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A14	-	LN1134A142DR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A15	-	LN1134A152DR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A16	-	LN1134A162DR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A17	-	LN1134A172DR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A18	-	LN1134A182DR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A19	-	LN1134A192DR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A1A	-	LN1134A10ADR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A1B	-	LN1134A11ADR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A1C	-	LN1134A12ADR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A1D	-	LN1134A13ADR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A1E	-	LN1134A14ADR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A1F	-	LN1134A15ADR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A1H	-	LN1134A16ADR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A1K	-	LN1134A17ADR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A1L	-	LN1134A18ADR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A1M	-	LN1134A19ADR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A20	-	LN1134A202DR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A21	-	LN1134A212DR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A22	-	LN1134A222DR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A23	-	LN1134A232DR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A24	-	LN1134A242DR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A25	-	LN1134A252DR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A26	-	LN1134A262DR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A27	-	LN1134A272DR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A28	-	LN1134A282DR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A29	-	LN1134A292DR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A2A	-	LN1134A20ADR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A2B	-	LN1134A21ADR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A2C	-	LN1134A22ADR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A2D	-	LN1134A23ADR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A2E	-	LN1134A24ADR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A2F	-	LN1134A25ADR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A2H	-	LN1134A26ADR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A2K	-	LN1134A27ADR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A2L	-	LN1134A28ADR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A2M	-	LN1134A29ADR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A30	-	LN1134A302DR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A31	-	LN1134A312DR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A32	-	LN1134A322DR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
34A33	-	LN1134A332DR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A34	-	LN1134A342DR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A35	-	LN1134A352DR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A36	-	LN1134A362DR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A37	-	LN1134A372DR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A38	-	LN1134A382DR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A39	-	LN1134A392DR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A3A	-	LN1134A30ADR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A3B	-	LN1134A31ADR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A3C	-	LN1134A32ADR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A3D	-	LN1134A33ADR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A3E	-	LN1134A34ADR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A3F	-	LN1134A35ADR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A3H	-	LN1134A36ADR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A3K	-	LN1134A37ADR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A3L	-	LN1134A38ADR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A3M	-	LN1134A39ADR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A40	-	LN1134A402DR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A41	-	LN1134A412DR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A42	-	LN1134A422DR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A43	-	LN1134A432DR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A44	-	LN1134A442DR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A45	-	LN1134A452DR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A46	-	LN1134A462DR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A47	-	LN1134A472DR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A48	-	LN1134A482DR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A49	-	LN1134A492DR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A4A	-	LN1134A40ADR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A4B	-	LN1134A41ADR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A4C	-	LN1134A42ADR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A4D	-	LN1134A43ADR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A4E	-	LN1134A44ADR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A4F	-	LN1134A45ADR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A4H	-	LN1134A46ADR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A4K	-	LN1134A47ADR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A4L	-	LN1134A48ADR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A4M	-	LN1134A49ADR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A50	-	LN1134A502DR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A51	-	LN1134A512DR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A52	-	LN1134A522DR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A53	-	LN1134A532DR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A54	-	LN1134A542DR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A55	-	LN1134A552DR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A56	-	LN1134A562DR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A57	-	LN1134A572DR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A58	-	LN1134A582DR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A59	-	LN1134A592DR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A5A	-	LN1134A50ADR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A5B	-	LN1134A51ADR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A5C	-	LN1134A52ADR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A5D	-	LN1134A53ADR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A5E	-	LN1134A54ADR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A5F	-	LN1134A55ADR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A5H	-	LN1134A56ADR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A5K	-	LN1134A57ADR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A5L	-	LN1134A58ADR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A5M	-	LN1134A59ADR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34A60	-	LN1134A602DR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE, PDR	DFN-6	74hq	VR4	9b	Nln
34B	-	AP6233A-10NLFGU	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34B	-	AP6233A-10NLFPU	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
34B	mg	AP6233A-10NLFGU1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34B	mg	AP6233A-10NLFPU1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
34B10	-	LN1134B102DR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B11	-	LN1134B112DR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B12	-	LN1134B122DR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B13	-	LN1134B132DR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B14	-	LN1134B142DR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B15	-	LN1134B152DR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B16	-	LN1134B162DR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B17	-	LN1134B172DR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
34B18	-	LN1134B182DR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B19	-	LN1134B192DR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B1A	-	LN1134B10ADR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B1B	-	LN1134B11ADR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B1C	-	LN1134B12ADR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B1D	-	LN1134B13ADR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B1E	-	LN1134B14ADR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B1F	-	LN1134B15ADR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B1H	-	LN1134B16ADR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B1K	-	LN1134B17ADR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B1L	-	LN1134B18ADR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B1M	-	LN1134B19ADR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B20	-	LN1134B202DR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B21	-	LN1134B212DR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B22	-	LN1134B222DR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B23	-	LN1134B232DR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B24	-	LN1134B242DR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B25	-	LN1134B252DR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B26	-	LN1134B262DR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B27	-	LN1134B272DR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B28	-	LN1134B282DR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B29	-	LN1134B292DR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B2A	-	LN1134B20ADR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B2B	-	LN1134B21ADR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B2C	-	LN1134B22ADR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B2D	-	LN1134B23ADR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B2E	-	LN1134B24ADR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B2F	-	LN1134B25ADR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B2H	-	LN1134B26ADR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B2K	-	LN1134B27ADR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B2L	-	LN1134B28ADR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B2M	-	LN1134B29ADR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B30	-	LN1134B302DR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B31	-	LN1134B312DR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B32	-	LN1134B322DR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B33	-	LN1134B332DR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B34	-	LN1134B342DR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B35	-	LN1134B352DR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B36	-	LN1134B362DR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B37	-	LN1134B372DR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B38	-	LN1134B382DR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B39	-	LN1134B392DR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B3A	-	LN1134B30ADR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B3B	-	LN1134B31ADR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B3C	-	LN1134B32ADR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B3D	-	LN1134B33ADR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B3E	-	LN1134B34ADR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B3F	-	LN1134B35ADR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B3H	-	LN1134B36ADR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B3K	-	LN1134B37ADR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B3L	-	LN1134B38ADR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B3M	-	LN1134B39ADR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B40	-	LN1134B402DR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B41	-	LN1134B412DR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B42	-	LN1134B422DR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B43	-	LN1134B432DR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B44	-	LN1134B442DR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B45	-	LN1134B452DR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B46	-	LN1134B462DR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B47	-	LN1134B472DR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B48	-	LN1134B482DR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B49	-	LN1134B492DR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B4A	-	LN1134B40ADR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B4B	-	LN1134B41ADR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B4C	-	LN1134B42ADR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B4D	-	LN1134B43ADR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B4E	-	LN1134B44ADR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B4F	-	LN1134B45ADR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B4H	-	LN1134B46ADR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B4K	-	LN1134B47ADR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
34B4L	-	LN1134B48ADR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B4M	-	LN1134B49ADR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B50	-	LN1134B502DR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B51	-	LN1134B512DR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B52	-	LN1134B522DR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B53	-	LN1134B532DR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B54	-	LN1134B542DR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B55	-	LN1134B552DR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B56	-	LN1134B562DR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B57	-	LN1134B572DR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B58	-	LN1134B582DR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B59	-	LN1134B592DR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B5A	-	LN1134B50ADR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B5B	-	LN1134B51ADR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B5C	-	LN1134B52ADR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B5D	-	LN1134B53ADR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B5E	-	LN1134B54ADR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B5F	-	LN1134B55ADR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B5H	-	LN1134B56ADR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B5K	-	LN1134B57ADR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B5L	-	LN1134B58ADR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B5M	-	LN1134B59ADR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34B60	-	LN1134B602DR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE	DFN-6	74hq	VR4	9b	Nln
34C	-	AP6233A-10NHNGU	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34C	-	AP6233A-10NHNPU	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
34C	mg	AP6233A-10NHNGU1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34C	mg	AP6233A-10NHNPU1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
34C10	-	LN1134C102DR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C11	-	LN1134C112DR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C12	-	LN1134C122DR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C13	-	LN1134C132DR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C14	-	LN1134C142DR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C15	-	LN1134C152DR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C16	-	LN1134C162DR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C17	-	LN1134C172DR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C18	-	LN1134C182DR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C19	-	LN1134C192DR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C1A	-	LN1134C10ADR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C1B	-	LN1134C11ADR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C1C	-	LN1134C12ADR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C1D	-	LN1134C13ADR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C1E	-	LN1134C14ADR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C1F	-	LN1134C15ADR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C1H	-	LN1134C16ADR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C1K	-	LN1134C17ADR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C1L	-	LN1134C18ADR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C1M	-	LN1134C19ADR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C20	-	LN1134C202DR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C21	-	LN1134C212DR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C22	-	LN1134C222DR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C23	-	LN1134C232DR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C24	-	LN1134C242DR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C25	-	LN1134C252DR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C26	-	LN1134C262DR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C27	-	LN1134C272DR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C28	-	LN1134C282DR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C29	-	LN1134C292DR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C2A	-	LN1134C20ADR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C2B	-	LN1134C21ADR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C2C	-	LN1134C22ADR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C2D	-	LN1134C23ADR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C2E	-	LN1134C24ADR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C2F	-	LN1134C25ADR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C2H	-	LN1134C26ADR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C2K	-	LN1134C27ADR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C2L	-	LN1134C28ADR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C2M	-	LN1134C29ADR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C30	-	LN1134C302DR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C31	-	LN1134C312DR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C32	-	LN1134C322DR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
34C33	-	LN1134C332DR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C34	-	LN1134C342DR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C35	-	LN1134C352DR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C36	-	LN1134C362DR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C37	-	LN1134C372DR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C38	-	LN1134C382DR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C39	-	LN1134C392DR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C3A	-	LN1134C30ADR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C3B	-	LN1134C31ADR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C3C	-	LN1134C32ADR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C3D	-	LN1134C33ADR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C3E	-	LN1134C34ADR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C3F	-	LN1134C35ADR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C3H	-	LN1134C36ADR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C3K	-	LN1134C37ADR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C3L	-	LN1134C38ADR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C3M	-	LN1134C39ADR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C40	-	LN1134C402DR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C41	-	LN1134C412DR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C42	-	LN1134C422DR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C43	-	LN1134C432DR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C44	-	LN1134C442DR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C45	-	LN1134C452DR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C46	-	LN1134C462DR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C47	-	LN1134C472DR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C48	-	LN1134C482DR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C49	-	LN1134C492DR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C4A	-	LN1134C40ADR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C4B	-	LN1134C41ADR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C4C	-	LN1134C42ADR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C4D	-	LN1134C43ADR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C4E	-	LN1134C44ADR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C4F	-	LN1134C45ADR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C4H	-	LN1134C46ADR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C4K	-	LN1134C47ADR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C4L	-	LN1134C48ADR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C4M	-	LN1134C49ADR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C50	-	LN1134C502DR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C51	-	LN1134C512DR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C52	-	LN1134C522DR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C53	-	LN1134C532DR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C54	-	LN1134C542DR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C55	-	LN1134C552DR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C56	-	LN1134C562DR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C57	-	LN1134C572DR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C58	-	LN1134C582DR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C59	-	LN1134C592DR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C5A	-	LN1134C50ADR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C5B	-	LN1134C51ADR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C5C	-	LN1134C52ADR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C5D	-	LN1134C53ADR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C5E	-	LN1134C54ADR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C5F	-	LN1134C55ADR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C5H	-	LN1134C56ADR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C5K	-	LN1134C57ADR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C5L	-	LN1134C58ADR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C5M	-	LN1134C59ADR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34C60	-	LN1134C602DR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE, PUR	DFN-6	74hq	VR4	9b	Nln
34D	-	AP6233A-10NLNGU	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34D	-	AP6233A-10NLNPU	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
34D	mg	AP6233A-10NLNGU1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34D	mg	AP6233A-10NLNPU1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
34D10	-	LN1134D102DR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D11	-	LN1134D112DR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D12	-	LN1134D122DR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D13	-	LN1134D132DR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D14	-	LN1134D142DR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D15	-	LN1134D152DR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D16	-	LN1134D162DR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D17	-	LN1134D172DR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
34D18	-	LN1134D182DR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D19	-	LN1134D192DR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D1A	-	LN1134D10ADR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D1B	-	LN1134D11ADR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D1C	-	LN1134D12ADR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D1D	-	LN1134D13ADR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D1E	-	LN1134D14ADR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D1F	-	LN1134D15ADR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D1H	-	LN1134D16ADR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D1K	-	LN1134D17ADR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D1L	-	LN1134D18ADR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D1M	-	LN1134D19ADR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D20	-	LN1134D202DR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D21	-	LN1134D212DR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D22	-	LN1134D222DR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D23	-	LN1134D232DR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D24	-	LN1134D242DR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D25	-	LN1134D252DR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D26	-	LN1134D262DR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D27	-	LN1134D272DR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D28	-	LN1134D282DR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D29	-	LN1134D292DR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D2A	-	LN1134D20ADR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D2B	-	LN1134D21ADR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D2C	-	LN1134D22ADR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D2D	-	LN1134D23ADR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D2E	-	LN1134D24ADR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D2F	-	LN1134D25ADR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D2H	-	LN1134D26ADR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D2K	-	LN1134D27ADR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D2L	-	LN1134D28ADR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D2M	-	LN1134D29ADR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D30	-	LN1134D302DR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D31	-	LN1134D312DR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D32	-	LN1134D322DR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D33	-	LN1134D332DR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D34	-	LN1134D342DR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D35	-	LN1134D352DR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D36	-	LN1134D362DR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D37	-	LN1134D372DR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D38	-	LN1134D382DR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D39	-	LN1134D392DR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D3A	-	LN1134D30ADR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D3B	-	LN1134D31ADR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D3C	-	LN1134D32ADR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D3D	-	LN1134D33ADR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D3E	-	LN1134D34ADR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D3F	-	LN1134D35ADR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D3H	-	LN1134D36ADR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D3K	-	LN1134D37ADR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D3L	-	LN1134D38ADR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D3M	-	LN1134D39ADR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D40	-	LN1134D402DR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D41	-	LN1134D412DR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D42	-	LN1134D422DR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D43	-	LN1134D432DR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D44	-	LN1134D442DR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D45	-	LN1134D452DR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D46	-	LN1134D462DR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D47	-	LN1134D472DR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D48	-	LN1134D482DR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D49	-	LN1134D492DR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D4A	-	LN1134D40ADR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D4B	-	LN1134D41ADR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D4C	-	LN1134D42ADR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D4D	-	LN1134D43ADR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D4E	-	LN1134D44ADR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D4F	-	LN1134D45ADR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D4H	-	LN1134D46ADR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D4K	-	LN1134D47ADR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
34D4L	-	LN1134D48ADR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D4M	-	LN1134D49ADR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D50	-	LN1134D502DR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D51	-	LN1134D512DR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D52	-	LN1134D522DR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D53	-	LN1134D532DR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D54	-	LN1134D542DR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D55	-	LN1134D552DR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D56	-	LN1134D562DR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D57	-	LN1134D572DR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D58	-	LN1134D582DR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D59	-	LN1134D592DR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D5A	-	LN1134D50ADR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D5B	-	LN1134D51ADR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D5C	-	LN1134D52ADR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D5D	-	LN1134D53ADR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D5E	-	LN1134D54ADR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D5F	-	LN1134D55ADR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D5H	-	LN1134D56ADR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D5K	-	LN1134D57ADR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D5L	-	LN1134D58ADR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D5M	-	LN1134D59ADR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34D60	-	LN1134D602DR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE	DFN-6	74hq	VR4	9b	Nln
34E	-	AP6233A-10UHFGU	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34E	-	AP6233A-10UHFPU	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
34E	-	XC6505C151ER	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
34E	mg	AP6233A-10UHFGU1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34E	mg	AP6233A-10UHFPU1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
34F	-	AP6233A-10ULFGU	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34F	-	AP6233A-10ULFPU	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
34F	-	XC6505C161ER	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
34F	mg	AP6233A-10ULFGU1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34F	mg	AP6233A-10ULFPU1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
34G	-	AP6233A-10UHNGU	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34G	-	AP6233A-10UHNPU	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
34G	mg	AP6233A-10UHNGU1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34G	mg	AP6233A-10UHNPU1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
34H	-	AP6233A-10ULNGU	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34H	-	AP6233A-10ULNPU	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
34H	-	XC6505C171ER	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
34H	mg	AP6233A-10ULNGU1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34H	mg	AP6233A-10ULNPU1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
34J	-	AP6233A-10DHFGU	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34J	-	AP6233A-10DHFPU	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
34J	mg	AP6233A-10DHFGU1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34J	mg	AP6233A-10DHFPU1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
34K	-	AP6233A-10DLFGU	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34K	-	AP6233A-10DLFPU	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
34K	-	XC6505C181ER	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
34K	mg	AP6233A-10DLFGU1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34K	mg	AP6233A-10DLFPU1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
34L	-	AP6233A-10DHNGU	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34L	-	AP6233A-10DHNPU	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
34L	-	XC6505C191ER	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
34L	mg	AP6233A-10DHNGU1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34L	mg	AP6233A-10DHNPU1	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
34M	-	AP6233A-10DLNGU	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34M	-	AP6233A-10DLNPU	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
34M	-	XC6505C201ER	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
34M	mg	AP6233A-10DLNGU1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
34M	mg	AP6233A-10DLNPU1	LVR-IC	LDO, 1.0V±1%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
34N	-	XC6505C211ER	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
34P	-	XC6505C221ER	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
34R	-	XC6505C231ER	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
34S	-	XC6505C241ER	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
34T	-	XC6505C251ER	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
34U	-	XC6505C261ER	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
34V	-	XC6505C271ER	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
34X	-	XC6505C281ER	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
34Y	-	XC6505C291ER	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
34Z	-	XC6505C301ER	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
35	-	RP110L111C	LVR-IC	LDO, 1.1V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
35	-	XC6221C43B7R	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
35	-	XC6223D1519R-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
35	-	XC6224B13B7R	LVR-IC	LDO, 1.25V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
35	-	XC6229H2911R-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
35	-	XC6420AB357R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/3.30V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
35	-	XC6420AB35DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.80/3.30V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
350	-	XC6505C311ER	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
351	-	XC6505C321ER	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
352	-	XC6505C331ER	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
353	-	XC6505C341ER	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
354	-	XC6505C351ER	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
355	-	XC6505C361ER	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
356	-	XC6505C371ER	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
357	-	XC6505C381ER	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
358	-	XC6505C391ER	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
359	-	XC6505C401ER	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
35A	-	AP6233A-12NHFGU	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35A	-	AP6233A-12NHFPU	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
35A	-	XC6505C411ER	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
35A	mg	AP6233A-12NHFGU1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35A	mg	AP6233A-12NHFPU1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
35B	-	AP6233A-12NLFGU	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35B	-	AP6233A-12NLFPU	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
35B	-	XC6505C421ER	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
35B	mg	AP6233A-12NLFGU1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35B	mg	AP6233A-12NLFPU1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
35C	-	AP6233A-12NHNGU	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35C	-	AP6233A-12NHNPU	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
35C	-	XC6505C431ER	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
35C	mg	AP6233A-12NHNGU1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35C	mg	AP6233A-12NHNPU1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
35D	-	AP6233A-12NLNGU	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35D	-	AP6233A-12NLNPU	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
35D	-	XC6505C441ER	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
35D	mg	AP6233A-12NLNGU1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35D	mg	AP6233A-12NLNPU1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
35E	-	AP6233A-12UHFGU	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35E	-	AP6233A-12UHFPU	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
35E	-	XC6505C451ER	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
35E	mg	AP6233A-12UHFGU1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35E	mg	AP6233A-12UHFPU1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
35F	-	AP6233A-12ULFGU	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35F	-	AP6233A-12ULFPU	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
35F	-	XC6505C461ER	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
35F	mg	AP6233A-12ULFGU1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35F	mg	AP6233A-12ULFPU1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
35G	-	AP6233A-12UHNGU	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35G	-	AP6233A-12UHNPU	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
35G	mg	AP6233A-12UHNGU1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35G	mg	AP6233A-12UHNPU1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
35H	-	AP6233A-12ULNGU	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35H	-	AP6233A-12ULNPU	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
35H	-	XC6505C471ER	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
35H	mg	AP6233A-12ULNGU1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35H	mg	AP6233A-12ULNPU1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
35J	-	AP6233A-12DHFGU	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35J	-	AP6233A-12DHFPU	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
35J	mg	AP6233A-12DHFGU1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35J	mg	AP6233A-12DHFPU1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
35K	-	AP6233A-12DLFGU	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35K	-	AP6233A-12DLFPU	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
35K	-	XC6505C481ER	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
35K	mg	AP6233A-12DLFGU1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35K	mg	AP6233A-12DLFPU1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
35L	-	AP6233A-12DHNGU	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35L	-	AP6233A-12DHNPU	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
35L	-	XC6505C491ER	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
35L	mg	AP6233A-12DHNGU1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
35L	mg	AP6233A-12DHNPU1	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
35M	-	AP6233A-12DLNGU	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35M	-	AP6233A-12DLNPU	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
35M	-	XC6505C501ER	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
35M	mg	AP6233A-12DLNGU1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
35M	mg	AP6233A-12DLNPU1	LVR-IC	LDO, 1.2V±1%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
36	-	ADP150ACBZ-1.8-R7	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	CB-4-3	63bc*	VR4	9a	Ad
36	-	CHT2030M1PT	Si-pnp	AF, Sw, 12V, 500mA, B=270..680, 260MHz	FBPT-723	17ta	-	9a	Chm
36	-	RP110L121C	LVR-IC	LDO, 1.2V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
36	-	XC6221C44B7R	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
36	-	XC6223D1619R-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
36	-	XC6224B14B7R	LVR-IC	LDO, 1.45V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
36	-	XC6229H29B1R-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
36	-	XC6420AB367R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/3.60V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
36	-	XC6420AB36DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/3.60V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
360	-	XC6505C611ER	LVR-IC	LDO, 6.1V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
361	-	XC6505C621ER	LVR-IC	LDO, 6.2V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
362	-	XC6505C631ER	LVR-IC	LDO, 6.3V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
363	-	XC6505C641ER	LVR-IC	LDO, 6.4V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
364	-	XC6505C651ER	LVR-IC	LDO, 6.5V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
365	-	XC6505C661ER	LVR-IC	LDO, 6.6V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
366	-	XC6505C671ER	LVR-IC	LDO, 6.7V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
367	-	XC6505C681ER	LVR-IC	LDO, 6.8V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
368	-	XC6505C691ER	LVR-IC	LDO, 6.9V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
369	-	XC6505C701ER	LVR-IC	LDO, 7.0V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
36N	-	XC6505C511ER	LVR-IC	LDO, 5.1V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
36P	-	XC6505C521ER	LVR-IC	LDO, 5.2V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
36R	-	XC6505C531ER	LVR-IC	LDO, 5.3V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
36S	-	XC6505C541ER	LVR-IC	LDO, 5.4V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
36T	-	XC6505C551ER	LVR-IC	LDO, 5.5V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
36U	-	XC6505C561ER	LVR-IC	LDO, 5.6V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
36V	-	XC6505C571ER	LVR-IC	LDO, 5.7V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
36X	-	XC6505C581ER	LVR-IC	LDO, 5.8V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
36Y	-	XC6505C591ER	LVR-IC	LDO, 5.9V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
36Z	-	XC6505C601ER	LVR-IC	LDO, 6.0V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
37	-	CH3906M1PT	Si-pnp	AF, Sw, 40V, 200mA, B=100..300, 250MHz	FBPT-723	17ta	-	9a	Chm
37	-	RP110L121C5	LVR-IC	LDO, 1.25V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
37	-	XC6217D0827R-G	LVR-IC	LDO, 0.8V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
37	-	XC6221C45B7R	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
37	-	XC6223D1719R-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
37	-	XC6224B15B7R	LVR-IC	LDO, 1.55V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
37	-	XC6229H3011R-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
37	-	XC6420AB377R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.60/1.20V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
37	-	XC6420AB37DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.60/1.20V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
37A	-	XC6505C711ER	LVR-IC	LDO, 7.1V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
37B	-	XC6505C721ER	LVR-IC	LDO, 7.2V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
37C	-	XC6505C731ER	LVR-IC	LDO, 7.3V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
37D	-	XC6505C741ER	LVR-IC	LDO, 7.4V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
37E	-	XC6505C751ER	LVR-IC	LDO, 7.5V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
37F	-	XC6505C761ER	LVR-IC	LDO, 7.6V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
37H	-	XC6505C771ER	LVR-IC	LDO, 7.7V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
37K	-	XC6505C781ER	LVR-IC	LDO, 7.8V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
37L	-	XC6505C791ER	LVR-IC	LDO, 7.9V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
37M	-	XC6505C801ER	LVR-IC	LDO, 8.0V±1%, 200mA, +CE, CL	USP-6C	49hq	VR4	9a	Tor
38	-	2SA1037M1PT-Q	Si-pnp	AF, 60V, 150mA, 200mW, B=120..270, 140MHz	FBPT-723	17ta	-	9a	Chm
38	-	RP110L131C	LVR-IC	LDO, 1.3V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
38	-	XC6217D0927R-G	LVR-IC	LDO, 0.9V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
38	-	XC6221C46B7R	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
38	-	XC6223D1819R-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
38	-	XC6224B16B7R	LVR-IC	LDO, 1.65V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
38	-	XC6229H30B1R-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
38	-	XC6420AB387R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/2.80V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
38	-	XC6420AB38DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.20/2.80V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
38A	-	AP6233A-15NHFGU	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38A	-	AP6233A-15NHFPU	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
38A	mg	AP6233A-15NHFGU1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38A	mg	AP6233A-15NHFPU1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
38A10	-	LN1138A102DR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A11	-	LN1138A112DR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A12	-	LN1138A122DR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
38A13	-	LN1138A132DR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A14	-	LN1138A142DR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A15	-	LN1138A152DR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A16	-	LN1138A162DR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A17	-	LN1138A172DR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A18	-	LN1138A182DR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A19	-	LN1138A192DR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A1A	-	LN1138A10ADR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A1B	-	LN1138A11ADR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A1C	-	LN1138A12ADR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A1D	-	LN1138A13ADR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A1E	-	LN1138A14ADR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A1F	-	LN1138A15ADR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A1H	-	LN1138A16ADR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A1K	-	LN1138A17ADR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A1L	-	LN1138A18ADR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A1M	-	LN1138A19ADR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A20	-	LN1138A202DR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A21	-	LN1138A212DR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A22	-	LN1138A222DR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A23	-	LN1138A232DR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A24	-	LN1138A242DR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A25	-	LN1138A252DR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A26	-	LN1138A262DR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A27	-	LN1138A272DR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A28	-	LN1138A282DR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A29	-	LN1138A292DR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A2A	-	LN1138A20ADR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A2B	-	LN1138A21ADR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A2C	-	LN1138A22ADR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A2D	-	LN1138A23ADR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A2E	-	LN1138A24ADR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A2F	-	LN1138A25ADR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A2H	-	LN1138A26ADR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A2K	-	LN1138A27ADR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A2L	-	LN1138A28ADR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A2M	-	LN1138A29ADR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A30	-	LN1138A302DR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A31	-	LN1138A312DR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A32	-	LN1138A322DR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A33	-	LN1138A332DR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A34	-	LN1138A342DR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A35	-	LN1138A352DR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A36	-	LN1138A362DR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A37	-	LN1138A372DR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A38	-	LN1138A382DR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A39	-	LN1138A392DR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A3A	-	LN1138A30ADR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A3B	-	LN1138A31ADR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A3C	-	LN1138A32ADR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A3D	-	LN1138A33ADR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A3E	-	LN1138A34ADR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A3F	-	LN1138A35ADR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A3H	-	LN1138A36ADR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A3K	-	LN1138A37ADR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A3L	-	LN1138A38ADR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A3M	-	LN1138A39ADR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A40	-	LN1138A402DR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A41	-	LN1138A412DR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A42	-	LN1138A422DR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A43	-	LN1138A432DR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A44	-	LN1138A442DR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A45	-	LN1138A452DR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A46	-	LN1138A462DR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A47	-	LN1138A472DR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A48	-	LN1138A482DR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A49	-	LN1138A492DR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A4A	-	LN1138A40ADR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A4B	-	LN1138A41ADR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A4C	-	LN1138A42ADR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
38A4D	-	LN1138A43ADR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A4E	-	LN1138A44ADR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A4F	-	LN1138A45ADR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A4H	-	LN1138A46ADR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A4K	-	LN1138A47ADR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A4L	-	LN1138A48ADR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A4M	-	LN1138A49ADR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A50	-	LN1138A502DR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A51	-	LN1138A512DR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A52	-	LN1138A522DR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A53	-	LN1138A532DR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A54	-	LN1138A542DR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A55	-	LN1138A552DR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A56	-	LN1138A562DR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A57	-	LN1138A572DR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A58	-	LN1138A582DR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A59	-	LN1138A592DR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A5A	-	LN1138A50ADR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A5B	-	LN1138A51ADR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A5C	-	LN1138A52ADR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A5D	-	LN1138A53ADR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A5E	-	LN1138A54ADR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A5F	-	LN1138A55ADR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A5H	-	LN1138A56ADR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A5K	-	LN1138A57ADR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A5L	-	LN1138A58ADR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A5M	-	LN1138A59ADR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38A60	-	LN1138A602DR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE, PDR	USP-6B	49hq	VR4	9b	Nln
38B	-	AP6233A-15NLFGU	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38B	-	AP6233A-15NLFPU	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
38B	mg	AP6233A-15NLFGU1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38B	mg	AP6233A-15NLFPU1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
38B10	-	LN1138B102DR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B11	-	LN1138B112DR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B12	-	LN1138B122DR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B13	-	LN1138B132DR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B14	-	LN1138B142DR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B15	-	LN1138B152DR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B16	-	LN1138B162DR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B17	-	LN1138B172DR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B18	-	LN1138B182DR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B19	-	LN1138B192DR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B1A	-	LN1138B10ADR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B1B	-	LN1138B11ADR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B1C	-	LN1138B12ADR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B1D	-	LN1138B13ADR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B1E	-	LN1138B14ADR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B1F	-	LN1138B15ADR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B1H	-	LN1138B16ADR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B1K	-	LN1138B17ADR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B1L	-	LN1138B18ADR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B1M	-	LN1138B19ADR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B20	-	LN1138B202DR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B21	-	LN1138B212DR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B22	-	LN1138B222DR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B23	-	LN1138B232DR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B24	-	LN1138B242DR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B25	-	LN1138B252DR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B26	-	LN1138B262DR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B27	-	LN1138B272DR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B28	-	LN1138B282DR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B29	-	LN1138B292DR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B2A	-	LN1138B20ADR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B2B	-	LN1138B21ADR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B2C	-	LN1138B22ADR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B2D	-	LN1138B23ADR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B2E	-	LN1138B24ADR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B2F	-	LN1138B25ADR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B2H	-	LN1138B26ADR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B2K	-	LN1138B27ADR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
38B2L	-	LN1138B28ADR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B2M	-	LN1138B29ADR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B30	-	LN1138B302DR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B31	-	LN1138B312DR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B32	-	LN1138B322DR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B33	-	LN1138B332DR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B34	-	LN1138B342DR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B35	-	LN1138B352DR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B36	-	LN1138B362DR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B37	-	LN1138B372DR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B38	-	LN1138B382DR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B39	-	LN1138B392DR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B3A	-	LN1138B30ADR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B3B	-	LN1138B31ADR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B3C	-	LN1138B32ADR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B3D	-	LN1138B33ADR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B3E	-	LN1138B34ADR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B3F	-	LN1138B35ADR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B3H	-	LN1138B36ADR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B3K	-	LN1138B37ADR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B3L	-	LN1138B38ADR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B3M	-	LN1138B39ADR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B40	-	LN1138B402DR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B41	-	LN1138B412DR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B42	-	LN1138B422DR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B43	-	LN1138B432DR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B44	-	LN1138B442DR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B45	-	LN1138B452DR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B46	-	LN1138B462DR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B47	-	LN1138B472DR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B48	-	LN1138B482DR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B49	-	LN1138B492DR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B4A	-	LN1138B40ADR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B4B	-	LN1138B41ADR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B4C	-	LN1138B42ADR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B4D	-	LN1138B43ADR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B4E	-	LN1138B44ADR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B4F	-	LN1138B45ADR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B4H	-	LN1138B46ADR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B4K	-	LN1138B47ADR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B4L	-	LN1138B48ADR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B4M	-	LN1138B49ADR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B50	-	LN1138B502DR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B51	-	LN1138B512DR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B52	-	LN1138B522DR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B53	-	LN1138B532DR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B54	-	LN1138B542DR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B55	-	LN1138B552DR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B56	-	LN1138B562DR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B57	-	LN1138B572DR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B58	-	LN1138B582DR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B59	-	LN1138B592DR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B5A	-	LN1138B50ADR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B5B	-	LN1138B51ADR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B5C	-	LN1138B52ADR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B5D	-	LN1138B53ADR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B5E	-	LN1138B54ADR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B5F	-	LN1138B55ADR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B5H	-	LN1138B56ADR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B5K	-	LN1138B57ADR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B5L	-	LN1138B58ADR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B5M	-	LN1138B59ADR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38B60	-	LN1138B602DR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE	USP-6B	49hq	VR4	9b	Nln
38C	-	AP6233A-15NHNGU	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38C	-	AP6233A-15NHNPU	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
38C	mg	AP6233A-15NHNGU1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38C	mg	AP6233A-15NHNPU1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
38C10	-	LN1138C102DR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C11	-	LN1138C112DR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C12	-	LN1138C122DR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
38C13	-	LN1138C132DR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C14	-	LN1138C142DR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C15	-	LN1138C152DR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C16	-	LN1138C162DR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C17	-	LN1138C172DR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C18	-	LN1138C182DR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C19	-	LN1138C192DR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C1A	-	LN1138C10ADR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C1B	-	LN1138C11ADR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C1C	-	LN1138C12ADR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C1D	-	LN1138C13ADR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C1E	-	LN1138C14ADR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C1F	-	LN1138C15ADR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C1H	-	LN1138C16ADR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C1K	-	LN1138C17ADR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C1L	-	LN1138C18ADR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C1M	-	LN1138C19ADR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C20	-	LN1138C202DR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C21	-	LN1138C212DR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C22	-	LN1138C222DR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C23	-	LN1138C232DR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C24	-	LN1138C242DR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C25	-	LN1138C252DR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C26	-	LN1138C262DR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C27	-	LN1138C272DR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C28	-	LN1138C282DR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C29	-	LN1138C292DR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C2A	-	LN1138C20ADR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C2B	-	LN1138C21ADR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C2C	-	LN1138C22ADR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C2D	-	LN1138C23ADR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C2E	-	LN1138C24ADR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C2F	-	LN1138C25ADR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C2H	-	LN1138C26ADR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C2K	-	LN1138C27ADR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C2L	-	LN1138C28ADR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C2M	-	LN1138C29ADR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C30	-	LN1138C302DR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C31	-	LN1138C312DR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C32	-	LN1138C322DR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C33	-	LN1138C332DR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C34	-	LN1138C342DR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C35	-	LN1138C352DR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C36	-	LN1138C362DR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C37	-	LN1138C372DR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C38	-	LN1138C382DR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C39	-	LN1138C392DR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C3A	-	LN1138C30ADR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C3B	-	LN1138C31ADR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C3C	-	LN1138C32ADR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C3D	-	LN1138C33ADR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C3E	-	LN1138C34ADR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C3F	-	LN1138C35ADR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C3H	-	LN1138C36ADR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C3K	-	LN1138C37ADR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C3L	-	LN1138C38ADR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C3M	-	LN1138C39ADR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C40	-	LN1138C402DR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C41	-	LN1138C412DR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C42	-	LN1138C422DR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C43	-	LN1138C432DR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C44	-	LN1138C442DR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C45	-	LN1138C452DR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C46	-	LN1138C462DR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C47	-	LN1138C472DR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C48	-	LN1138C482DR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C49	-	LN1138C492DR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C4A	-	LN1138C40ADR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C4B	-	LN1138C41ADR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C4C	-	LN1138C42ADR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
38C4D	-	LN1138C43ADR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C4E	-	LN1138C44ADR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C4F	-	LN1138C45ADR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C4H	-	LN1138C46ADR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C4K	-	LN1138C47ADR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C4L	-	LN1138C48ADR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C4M	-	LN1138C49ADR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C50	-	LN1138C502DR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C51	-	LN1138C512DR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C52	-	LN1138C522DR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C53	-	LN1138C532DR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C54	-	LN1138C542DR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C55	-	LN1138C552DR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C56	-	LN1138C562DR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C57	-	LN1138C572DR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C58	-	LN1138C582DR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C59	-	LN1138C592DR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C5A	-	LN1138C50ADR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C5B	-	LN1138C51ADR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C5C	-	LN1138C52ADR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C5D	-	LN1138C53ADR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C5E	-	LN1138C54ADR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C5F	-	LN1138C55ADR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C5H	-	LN1138C56ADR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C5K	-	LN1138C57ADR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C5L	-	LN1138C58ADR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C5M	-	LN1138C59ADR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38C60	-	LN1138C602DR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE, PUR	USP-6B	49hq	VR4	9b	Nln
38D	-	AP6233A-15NLNGU	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38D	-	AP6233A-15NLNPU	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
38D	mg	AP6233A-15NLNGU1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38D	mg	AP6233A-15NLNPU1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
38D10	-	LN1138D102DR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D11	-	LN1138D112DR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D12	-	LN1138D122DR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D13	-	LN1138D132DR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D14	-	LN1138D142DR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D15	-	LN1138D152DR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D16	-	LN1138D162DR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D17	-	LN1138D172DR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D18	-	LN1138D182DR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D19	-	LN1138D192DR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D1A	-	LN1138D10ADR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D1B	-	LN1138D11ADR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D1C	-	LN1138D12ADR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D1D	-	LN1138D13ADR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D1E	-	LN1138D14ADR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D1F	-	LN1138D15ADR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D1H	-	LN1138D16ADR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D1K	-	LN1138D17ADR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D1L	-	LN1138D18ADR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D1M	-	LN1138D19ADR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D20	-	LN1138D202DR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D21	-	LN1138D212DR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D22	-	LN1138D222DR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D23	-	LN1138D232DR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D24	-	LN1138D242DR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D25	-	LN1138D252DR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D26	-	LN1138D262DR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D27	-	LN1138D272DR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D28	-	LN1138D282DR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D29	-	LN1138D292DR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D2A	-	LN1138D20ADR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D2B	-	LN1138D21ADR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D2C	-	LN1138D22ADR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D2D	-	LN1138D23ADR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D2E	-	LN1138D24ADR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D2F	-	LN1138D25ADR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D2H	-	LN1138D26ADR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D2K	-	LN1138D27ADR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
38D2L	-	LN1138D28ADR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D2M	-	LN1138D29ADR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D30	-	LN1138D302DR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D31	-	LN1138D312DR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D32	-	LN1138D322DR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D33	-	LN1138D332DR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D34	-	LN1138D342DR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D35	-	LN1138D352DR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D36	-	LN1138D362DR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D37	-	LN1138D372DR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D38	-	LN1138D382DR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D39	-	LN1138D392DR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D3A	-	LN1138D30ADR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D3B	-	LN1138D31ADR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D3C	-	LN1138D32ADR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D3D	-	LN1138D33ADR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D3E	-	LN1138D34ADR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D3F	-	LN1138D35ADR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D3H	-	LN1138D36ADR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D3K	-	LN1138D37ADR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D3L	-	LN1138D38ADR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D3M	-	LN1138D39ADR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D40	-	LN1138D402DR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D41	-	LN1138D412DR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D42	-	LN1138D422DR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D43	-	LN1138D432DR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D44	-	LN1138D442DR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D45	-	LN1138D452DR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D46	-	LN1138D462DR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D47	-	LN1138D472DR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D48	-	LN1138D482DR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D49	-	LN1138D492DR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D4A	-	LN1138D40ADR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D4B	-	LN1138D41ADR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D4C	-	LN1138D42ADR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D4D	-	LN1138D43ADR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D4E	-	LN1138D44ADR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D4F	-	LN1138D45ADR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D4H	-	LN1138D46ADR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D4K	-	LN1138D47ADR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D4L	-	LN1138D48ADR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D4M	-	LN1138D49ADR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D50	-	LN1138D502DR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D51	-	LN1138D512DR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D52	-	LN1138D522DR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D53	-	LN1138D532DR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D54	-	LN1138D542DR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D55	-	LN1138D552DR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D56	-	LN1138D562DR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D57	-	LN1138D572DR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D58	-	LN1138D582DR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D59	-	LN1138D592DR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D5A	-	LN1138D50ADR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D5B	-	LN1138D51ADR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D5C	-	LN1138D52ADR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D5D	-	LN1138D53ADR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D5E	-	LN1138D54ADR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D5F	-	LN1138D55ADR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D5H	-	LN1138D56ADR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D5K	-	LN1138D57ADR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D5L	-	LN1138D58ADR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D5M	-	LN1138D59ADR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38D60	-	LN1138D602DR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE	USP-6B	49hq	VR4	9b	Nln
38E	-	AP6233A-15UHFGU	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38E	-	AP6233A-15UHFPU	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
38E	mg	AP6233A-15UHFGU1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38E	mg	AP6233A-15UHFPU1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
38F	-	AP6233A-15ULFGU	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38F	-	AP6233A-15ULFPU	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
38F	mg	AP6233A-15ULFGU1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
38F	mg	AP6233A-15ULFPU1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
38G	-	AP6233A-15UHNGU	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38G	-	AP6233A-15UHNPU	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
38G	mg	AP6233A-15UHNGU1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38G	mg	AP6233A-15UHNPU1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
38H	-	AP6233A-15ULNGU	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38H	-	AP6233A-15ULNPU	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
38H	mg	AP6233A-15ULNGU1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38H	mg	AP6233A-15ULNPU1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
38J	-	AP6233A-15DHFGU	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38J	-	AP6233A-15DHFPU	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
38J	mg	AP6233A-15DHFGU1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38J	mg	AP6233A-15DHFPU1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
38K	-	AP6233A-15DLFGU	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38K	-	AP6233A-15DLFPU	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
38K	mg	AP6233A-15DLFGU1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38K	mg	AP6233A-15DLFPU1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
38L	-	AP6233A-15DHNGU	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38L	-	AP6233A-15DHNPU	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
38L	mg	AP6233A-15DHNGU1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38L	mg	AP6233A-15DHNPU1	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
38M	-	AP6233A-15DLNGU	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38M	-	AP6233A-15DLNPU	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
38M	mg	AP6233A-15DLNGU1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
38M	mg	AP6233A-15DLNPU1	LVR-IC	LDO, 1.5V±1%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
39	-	2SA1037M1PT-R	Si-pnp	AF, 60V, 150mA, 200mW, B=180..390, 140MHz	FBPT-723	17ta	-	9a	Chm
39	-	LEE-39+	MMIC	RF amplifier, DC..8GHz, 18.5dB (50Ω)	FG873	36aa	A1	9b	Mc
39	-	RP110L141C	LVR-IC	LDO, 1.4V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
39	-	XC6217D1027R-G	LVR-IC	LDO, 1.0V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
39	-	XC6221C47B7R	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
39	-	XC6223D1919R-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
39	-	XC6224B17B7R	LVR-IC	LDO, 1.75V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
39	-	XC6229H3111R-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
39	-	XC6420AB397R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/2.00V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
39	-	XC6420AB39DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/2.00V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
3A	-	R3117K071C	Vdet-IC	0.7V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3A	-	RP101K121B	LVR-IC	LDO, LN, 1.1V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3A	-	RP112K121D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3A	-	RP173K121B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3A	-	XC6217D1127R-G	LVR-IC	LDO, 1.1V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3A	-	XC6221C48B7R	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
3A	-	XC6223D2019R-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3A	-	XC6224B18B7R	LVR-IC	LDO, 1.85V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
3A	-	XC6229H31B1R-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3A0	-	XC6221A311GR	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3A016	-	XC6106A016ER	Vdet-IC	1.6V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A017	-	XC6106A017ER	Vdet-IC	1.7V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A018	-	XC6106A018ER	Vdet-IC	1.8V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A019	-	XC6106A019ER	Vdet-IC	1.9V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A020	-	XC6106A020ER	Vdet-IC	2.0V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A021	-	XC6106A021ER	Vdet-IC	2.1V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A022	-	XC6106A022ER	Vdet-IC	2.2V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A023	-	XC6106A023ER	Vdet-IC	2.3V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A024	-	XC6106A024ER	Vdet-IC	2.4V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A025	-	XC6106A025ER	Vdet-IC	2.5V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A026	-	XC6106A026ER	Vdet-IC	2.6V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A027	-	XC6106A027ER	Vdet-IC	2.7V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A028	-	XC6106A028ER	Vdet-IC	2.8V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A029	-	XC6106A029ER	Vdet-IC	2.9V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A030	-	XC6106A030ER	Vdet-IC	3.0V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A031	-	XC6106A031ER	Vdet-IC	3.1V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A032	-	XC6106A032ER	Vdet-IC	3.2V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A033	-	XC6106A033ER	Vdet-IC	3.3V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A034	-	XC6106A034ER	Vdet-IC	3.4V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A035	-	XC6106A035ER	Vdet-IC	3.5V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A036	-	XC6106A036ER	Vdet-IC	3.6V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A037	-	XC6106A037ER	Vdet-IC	3.7V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A038	-	XC6106A038ER	Vdet-IC	3.8V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A039	-	XC6106A039ER	Vdet-IC	3.9V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A040	-	XC6106A040ER	Vdet-IC	4.0V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3A041	-	XC6106A041ER	Vdet-IC	4.1V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A042	-	XC6106A042ER	Vdet-IC	4.2V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A043	-	XC6106A043ER	Vdet-IC	4.3V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A044	-	XC6106A044ER	Vdet-IC	4.4V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A045	-	XC6106A045ER	Vdet-IC	4.5V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A046	-	XC6106A046ER	Vdet-IC	4.6V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A047	-	XC6106A047ER	Vdet-IC	4.7V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A048	-	XC6106A048ER	Vdet-IC	4.8V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A049	-	XC6106A049ER	Vdet-IC	4.9V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
3A1	-	XC6221A321GR	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3A116	-	XC6101A116ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A117	-	XC6101A117ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A118	-	XC6101A118ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A119	-	XC6101A119ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A120	-	XC6101A120ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A121	-	XC6101A121ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A122	-	XC6101A122ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A123	-	XC6101A123ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A124	-	XC6101A124ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A125	-	XC6101A125ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A126	-	XC6101A126ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A127	-	XC6101A127ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A128	-	XC6101A128ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A129	-	XC6101A129ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A130	-	XC6101A130ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A131	-	XC6101A131ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A132	-	XC6101A132ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A133	-	XC6101A133ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A134	-	XC6101A134ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A135	-	XC6101A135ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A136	-	XC6101A136ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A137	-	XC6101A137ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A138	-	XC6101A138ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A139	-	XC6101A139ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A140	-	XC6101A140ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A141	-	XC6101A141ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A142	-	XC6101A142ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A143	-	XC6101A143ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A144	-	XC6101A144ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A145	-	XC6101A145ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A146	-	XC6101A146ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A147	-	XC6101A147ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A148	-	XC6101A148ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A149	-	XC6101A149ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A150	-	XC6101A150ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A2	-	XC6221A331GR	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3A216	-	XC6101A216ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A217	-	XC6101A217ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A218	-	XC6101A218ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A219	-	XC6101A219ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A220	-	XC6101A220ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A221	-	XC6101A221ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A222	-	XC6101A222ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A223	-	XC6101A223ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A224	-	XC6101A224ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A225	-	XC6101A225ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A226	-	XC6101A226ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A227	-	XC6101A227ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A228	-	XC6101A228ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A229	-	XC6101A229ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A230	-	XC6101A230ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A231	-	XC6101A231ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A232	-	XC6101A232ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A233	-	XC6101A233ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A234	-	XC6101A234ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A235	-	XC6101A235ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A236	-	XC6101A236ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A237	-	XC6101A237ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A238	-	XC6101A238ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A239	-	XC6101A239ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3A240	-	XC6101A240ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A241	-	XC6101A241ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A242	-	XC6101A242ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A243	-	XC6101A243ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A244	-	XC6101A244ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A245	-	XC6101A245ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A246	-	XC6101A246ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A247	-	XC6101A247ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A248	-	XC6101A248ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A249	-	XC6101A249ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A250	-	XC6101A250ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A3	-	XC6221A341GR	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3A316	-	XC6101A316ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A317	-	XC6101A317ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A318	-	XC6101A318ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A319	-	XC6101A319ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A320	-	XC6101A320ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A321	-	XC6101A321ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A322	-	XC6101A322ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A323	-	XC6101A323ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A324	-	XC6101A324ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A325	-	XC6101A325ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A326	-	XC6101A326ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A327	-	XC6101A327ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A328	-	XC6101A328ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A329	-	XC6101A329ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A330	-	XC6101A330ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A331	-	XC6101A331ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A332	-	XC6101A332ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A333	-	XC6101A333ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A334	-	XC6101A334ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A335	-	XC6101A335ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A336	-	XC6101A336ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A337	-	XC6101A337ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A338	-	XC6101A338ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A339	-	XC6101A339ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A340	-	XC6101A340ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A341	-	XC6101A341ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A342	-	XC6101A342ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A343	-	XC6101A343ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A344	-	XC6101A344ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A345	-	XC6101A345ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A346	-	XC6101A346ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A347	-	XC6101A347ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A348	-	XC6101A348ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A349	-	XC6101A349ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A350	-	XC6101A350ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A4	-	XC6221A351GR	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3A416	-	XC6101A416ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A417	-	XC6101A417ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A418	-	XC6101A418ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A419	-	XC6101A419ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A420	-	XC6101A420ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A421	-	XC6101A421ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A422	-	XC6101A422ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A423	-	XC6101A423ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A424	-	XC6101A424ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A425	-	XC6101A425ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A426	-	XC6101A426ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A427	-	XC6101A427ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A428	-	XC6101A428ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A429	-	XC6101A429ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A430	-	XC6101A430ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A431	-	XC6101A431ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A432	-	XC6101A432ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A433	-	XC6101A433ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A434	-	XC6101A434ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A435	-	XC6101A435ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A436	-	XC6101A436ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A437	-	XC6101A437ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3A438	-	XC6101A438ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A439	-	XC6101A439ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A440	-	XC6101A440ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A441	-	XC6101A441ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A442	-	XC6101A442ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A443	-	XC6101A443ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A444	-	XC6101A444ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A445	-	XC6101A445ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A446	-	XC6101A446ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A447	-	XC6101A447ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A448	-	XC6101A448ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A449	-	XC6101A449ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A450	-	XC6101A450ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A5	-	AP6203A-12GU	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3A5	-	AP6203A-12PU	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	UFN-6	56hq	VR4	9i	Anw
3A5	-	XC6221A361GR	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3A516	-	XC6101A516ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A517	-	XC6101A517ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A518	-	XC6101A518ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A519	-	XC6101A519ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A520	-	XC6101A520ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A521	-	XC6101A521ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A522	-	XC6101A522ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A523	-	XC6101A523ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A524	-	XC6101A524ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A525	-	XC6101A525ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A526	-	XC6101A526ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A527	-	XC6101A527ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A528	-	XC6101A528ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A529	-	XC6101A529ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A530	-	XC6101A530ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A531	-	XC6101A531ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A532	-	XC6101A532ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A533	-	XC6101A533ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A534	-	XC6101A534ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A535	-	XC6101A535ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A536	-	XC6101A536ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A537	-	XC6101A537ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A538	-	XC6101A538ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A539	-	XC6101A539ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A540	-	XC6101A540ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A541	-	XC6101A541ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A542	-	XC6101A542ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A543	-	XC6101A543ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A544	-	XC6101A544ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A545	-	XC6101A545ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A546	-	XC6101A546ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A547	-	XC6101A547ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A548	-	XC6101A548ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A549	-	XC6101A549ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A550	-	XC6101A550ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A6	-	XC6221A371GR	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3A616	-	XC6101A616ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A617	-	XC6101A617ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A618	-	XC6101A618ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A619	-	XC6101A619ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A620	-	XC6101A620ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A621	-	XC6101A621ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A622	-	XC6101A622ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A623	-	XC6101A623ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A624	-	XC6101A624ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A625	-	XC6101A625ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A626	-	XC6101A626ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A627	-	XC6101A627ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A628	-	XC6101A628ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A629	-	XC6101A629ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A630	-	XC6101A630ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A631	-	XC6101A631ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A632	-	XC6101A632ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A633	-	XC6101A633ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3A634	-	XC6101A634ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A635	-	XC6101A635ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A636	-	XC6101A636ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A637	-	XC6101A637ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A638	-	XC6101A638ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A639	-	XC6101A639ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A640	-	XC6101A640ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A641	-	XC6101A641ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A642	-	XC6101A642ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A643	-	XC6101A643ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A644	-	XC6101A644ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A645	-	XC6101A645ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A646	-	XC6101A646ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A647	-	XC6101A647ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A648	-	XC6101A648ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A649	-	XC6101A649ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A650	-	XC6101A650ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
3A7	-	XC6221A381GR	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3A8	-	AP6203A-15GU	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3A8	-	AP6203A-15PU	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	UFN-6	56hq	VR4	9i	Anw
3A8	-	XC6221A391GR	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3A8	-	XC6227A081ER	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3A9	-	XC6221A401GR	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3A9	-	XC6227A091ER	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AA	-	AP6203A-18GU	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AA	-	AP6203A-18PU	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	UFN-6	56hq	VR4	9i	Anw
3AA	-	AP6233A-18NHFGU	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AA	-	AP6233A-18NHFPU	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3AA	-	XC6221A411GR	LVR-IC	LDO, 4.1±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3AA	-	XC6227A101ER	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AA	mg	AP6233A-18NHFGU1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AA	mg	AP6233A-18NHFPU1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3AA01	-	XC6404AA01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA02	-	XC6404AA02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA03	-	XC6404AA03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA04	-	XC6404AA04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA05	-	XC6404AA05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA07	-	XC6404AA07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA08	-	XC6404AA08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA09	-	XC6404AA09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA10	-	XC6404AA10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA11	-	XC6404AA11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA12	-	XC6404AA12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA13	-	XC6404AA13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA14	-	XC6404AA14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA15	-	XC6404AA15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA16	-	XC6404AA16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA17	-	XC6404AA17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA18	-	XC6404AA18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA19	-	XC6404AA19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA20	-	XC6404AA20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA21	-	XC6404AA21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA22	-	XC6404AA22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA23	-	XC6404AA23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA24	-	XC6404AA24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA25	-	XC6404AA25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA26	-	XC6404AA26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA27	-	XC6404AA27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA28	-	XC6404AA28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA29	-	XC6404AA29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA30	-	XC6404AA30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA31	-	XC6404AA31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA32	-	XC6404AA32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA33	-	XC6404AA33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA34	-	XC6404AA34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA80	-	XC6404AA80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA81	-	XC6404AA81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA82	-	XC6404AA82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA83	-	XC6404AA83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA84	-	XC6404AA84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3AA85	-	XC6404AA85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA86	-	XC6404AA86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA87	-	XC6404AA87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AA88	-	XC6404AA88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB	-	AP6233A-18NLFGU	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AB	-	AP6233A-18NLFPU	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3AB	-	XC6221A421GR	LVR-IC	LDO, 4.2±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3AB	-	XC6227A111ER	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AB	mg	AP6233A-18NLFGU1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AB	mg	AP6233A-18NLFPU1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3AB01	-	XC6404AB01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB02	-	XC6404AB02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB03	-	XC6404AB03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB04	-	XC6404AB04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB05	-	XC6404AB05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB07	-	XC6404AB07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB08	-	XC6404AB08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB09	-	XC6404AB09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB10	-	XC6404AB10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB11	-	XC6404AB11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB12	-	XC6404AB12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB13	-	XC6404AB13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB14	-	XC6404AB14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB15	-	XC6404AB15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB16	-	XC6404AB16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB17	-	XC6404AB17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB18	-	XC6404AB18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB19	-	XC6404AB19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB20	-	XC6404AB20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB21	-	XC6404AB21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB22	-	XC6404AB22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB23	-	XC6404AB23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB24	-	XC6404AB24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB25	-	XC6404AB25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB26	-	XC6404AB26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB27	-	XC6404AB27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB28	-	XC6404AB28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB29	-	XC6404AB29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB30	-	XC6404AB30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB31	-	XC6404AB31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB32	-	XC6404AB32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB33	-	XC6404AB33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB34	-	XC6404AB34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB80	-	XC6404AB80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB81	-	XC6404AB81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB82	-	XC6404AB82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB83	-	XC6404AB83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB84	-	XC6404AB84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB85	-	XC6404AB85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB86	-	XC6404AB86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB87	-	XC6404AB87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AB88	-	XC6404AB88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC	-	AP6233A-18NHNGU	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AC	-	AP6233A-18NHNPU	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
3AC	-	XC6221A431GR	LVR-IC	LDO, 4.3±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3AC	-	XC6227A121ER	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AC	mg	AP6233A-18NHNGU1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AC	mg	AP6233A-18NHNPU1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
3AC01	-	XC6404AC01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC02	-	XC6404AC02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC03	-	XC6404AC03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC04	-	XC6404AC04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC05	-	XC6404AC05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC07	-	XC6404AC07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC08	-	XC6404AC08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC09	-	XC6404AC09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC10	-	XC6404AC10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC11	-	XC6404AC11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC12	-	XC6404AC12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC13	-	XC6404AC13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3AC14	-	XC6404AC14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC15	-	XC6404AC15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC16	-	XC6404AC16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC17	-	XC6404AC17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC18	-	XC6404AC18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC19	-	XC6404AC19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC20	-	XC6404AC20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC21	-	XC6404AC21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC22	-	XC6404AC22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC23	-	XC6404AC23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC24	-	XC6404AC24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC25	-	XC6404AC25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC26	-	XC6404AC26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC27	-	XC6404AC27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC28	-	XC6404AC28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC29	-	XC6404AC29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC30	-	XC6404AC30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC31	-	XC6404AC31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC32	-	XC6404AC32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC33	-	XC6404AC33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC34	-	XC6404AC34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC80	-	XC6404AC80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC81	-	XC6404AC81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC82	-	XC6404AC82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC83	-	XC6404AC83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC84	-	XC6404AC84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC85	-	XC6404AC85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC86	-	XC6404AC86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC87	-	XC6404AC87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AC88	-	XC6404AC88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD	-	AP6233A-18NLNGU	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AD	-	AP6233A-18NLNPU	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
3AD	-	XC6221A441GR	LVR-IC	LDO, 4.4±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3AD	-	XC6227A131ER	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AD	mg	AP6233A-18NLNGU1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AD	mg	AP6233A-18NLNPU1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
3AD01	-	XC6404AD01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD02	-	XC6404AD02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD03	-	XC6404AD03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD04	-	XC6404AD04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD05	-	XC6404AD05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD07	-	XC6404AD07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD08	-	XC6404AD08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD09	-	XC6404AD09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD10	-	XC6404AD10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD11	-	XC6404AD11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD12	-	XC6404AD12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD13	-	XC6404AD13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD14	-	XC6404AD14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD15	-	XC6404AD15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD16	-	XC6404AD16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD17	-	XC6404AD17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD18	-	XC6404AD18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD19	-	XC6404AD19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD20	-	XC6404AD20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD21	-	XC6404AD21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD22	-	XC6404AD22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD23	-	XC6404AD23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD24	-	XC6404AD24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD25	-	XC6404AD25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD26	-	XC6404AD26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD27	-	XC6404AD27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD28	-	XC6404AD28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD29	-	XC6404AD29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD30	-	XC6404AD30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD31	-	XC6404AD31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD32	-	XC6404AD32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD33	-	XC6404AD33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD34	-	XC6404AD34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD80	-	XC6404AD80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3AD81	-	XC6404AD81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD82	-	XC6404AD82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD83	-	XC6404AD83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD84	-	XC6404AD84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD85	-	XC6404AD85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD86	-	XC6404AD86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD87	-	XC6404AD87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AD88	-	XC6404AD88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3AE	-	AP6233A-18UHFGU	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AE	-	AP6233A-18UHFPU	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3AE	-	XC6221A451GR	LVR-IC	LDO, 4.5±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3AE	-	XC6227A141ER	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AE	mg	AP6233A-18UHFGU1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AE	mg	AP6233A-18UHFPU1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3AE01	-	XC6404AE01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE02	-	XC6404AE02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE03	-	XC6404AE03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE04	-	XC6404AE04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE05	-	XC6404AE05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE07	-	XC6404AE07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE08	-	XC6404AE08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE09	-	XC6404AE09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE10	-	XC6404AE10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE11	-	XC6404AE11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE12	-	XC6404AE12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE13	-	XC6404AE13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE14	-	XC6404AE14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE15	-	XC6404AE15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE16	-	XC6404AE16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE17	-	XC6404AE17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE18	-	XC6404AE18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE19	-	XC6404AE19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE20	-	XC6404AE20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE21	-	XC6404AE21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE22	-	XC6404AE22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE23	-	XC6404AE23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE24	-	XC6404AE24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE25	-	XC6404AE25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE26	-	XC6404AE26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE27	-	XC6404AE27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE28	-	XC6404AE28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE29	-	XC6404AE29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE30	-	XC6404AE30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE31	-	XC6404AE31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE32	-	XC6404AE32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE33	-	XC6404AE33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE34	-	XC6404AE34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE80	-	XC6404AE80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE81	-	XC6404AE81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE82	-	XC6404AE82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE83	-	XC6404AE83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE84	-	XC6404AE84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE85	-	XC6404AE85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE86	-	XC6404AE86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE87	-	XC6404AE87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AE88	-	XC6404AE88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF	-	AP6233A-18ULFGU	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AF	-	AP6233A-18ULFPU	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3AF	-	XC6221A461GR	LVR-IC	LDO, 4.6±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3AF	-	XC6227A151ER	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AF	mg	AP6233A-18ULFGU1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AF	mg	AP6233A-18ULFPU1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3AF01	-	XC6404AF01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF02	-	XC6404AF02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF03	-	XC6404AF03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF04	-	XC6404AF04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF05	-	XC6404AF05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF07	-	XC6404AF07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF08	-	XC6404AF08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF09	-	XC6404AF09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor






SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3AF10	-	XC6404AF10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF11	-	XC6404AF11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF12	-	XC6404AF12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF13	-	XC6404AF13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF14	-	XC6404AF14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF15	-	XC6404AF15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF16	-	XC6404AF16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF17	-	XC6404AF17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF18	-	XC6404AF18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF19	-	XC6404AF19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF20	-	XC6404AF20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF21	-	XC6404AF21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF22	-	XC6404AF22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF23	-	XC6404AF23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF24	-	XC6404AF24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF25	-	XC6404AF25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF26	-	XC6404AF26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF27	-	XC6404AF27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF28	-	XC6404AF28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF29	-	XC6404AF29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF30	-	XC6404AF30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF31	-	XC6404AF31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF32	-	XC6404AF32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF33	-	XC6404AF33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF34	-	XC6404AF34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF80	-	XC6404AF80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF81	-	XC6404AF81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF82	-	XC6404AF82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF83	-	XC6404AF83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF84	-	XC6404AF84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF85	-	XC6404AF85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF86	-	XC6404AF86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF87	-	XC6404AF87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AF88	-	XC6404AF88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AG	-	AP6203A-25GU	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AG	-	AP6203A-25PU	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	UFN-6	56hq	VR4	9i	Anw
3AG	-	AP6233A-18UHNGU	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AG	-	AP6233A-18UHNPU	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3AG	mg	AP6233A-18UHNGU1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AG	mg	AP6233A-18UHNPU1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3AH	-	AP6233A-18ULNGU	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AH	-	AP6233A-18ULNPU	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3AH	-	XC6221A471GR	LVR-IC	LDO, 4.7±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3AH	-	XC6227A161ER	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AH	mg	AP6233A-18ULNGU1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AH	mg	AP6233A-18ULNPU1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3AH01	-	XC6404AH01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH02	-	XC6404AH02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH03	-	XC6404AH03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH04	-	XC6404AH04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH05	-	XC6404AH05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH07	-	XC6404AH07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH08	-	XC6404AH08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH09	-	XC6404AH09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH10	-	XC6404AH10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH11	-	XC6404AH11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH12	-	XC6404AH12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH13	-	XC6404AH13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH14	-	XC6404AH14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH15	-	XC6404AH15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH16	-	XC6404AH16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH17	-	XC6404AH17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH18	-	XC6404AH18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH19	-	XC6404AH19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH20	-	XC6404AH20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH21	-	XC6404AH21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH22	-	XC6404AH22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH23	-	XC6404AH23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH24	-	XC6404AH24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH25	-	XC6404AH25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3AH26	-	XC6404AH26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH27	-	XC6404AH27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH28	-	XC6404AH28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH29	-	XC6404AH29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH30	-	XC6404AH30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH31	-	XC6404AH31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH32	-	XC6404AH32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH33	-	XC6404AH33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH34	-	XC6404AH34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH80	-	XC6404AH80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH81	-	XC6404AH81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH82	-	XC6404AH82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH83	-	XC6404AH83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH84	-	XC6404AH84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH85	-	XC6404AH85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH86	-	XC6404AH86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH87	-	XC6404AH87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AH88	-	XC6404AH88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AJ	-	AP6203A-27GU	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AJ	-	AP6203A-27PU	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	UFN-6	56hq	VR4	9i	Anw
3AJ	-	AP6233A-18DHFGU	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AJ	-	AP6233A-18DHFPU	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3AJ	mg	AP6233A-18DHFGU1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AJ	mg	AP6233A-18DHFPU1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3AK	-	AP6203A-28GU	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AK	-	AP6203A-28PU	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	UFN-6	56hq	VR4	9i	Anw
3AK	-	AP6233A-18DLFGU	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AK	-	AP6233A-18DLFPU	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3AK	-	XC6221A481GR	LVR-IC	LDO, 4.8±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3AK	-	XC6227A171ER	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AK	mg	AP6233A-18DLFGU1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AK	mg	AP6233A-18DLFPU1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3AK01	-	XC6404AK01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK02	-	XC6404AK02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK03	-	XC6404AK03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK04	-	XC6404AK04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK05	-	XC6404AK05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK07	-	XC6404AK07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK08	-	XC6404AK08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK09	-	XC6404AK09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK10	-	XC6404AK10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK11	-	XC6404AK11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK12	-	XC6404AK12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK13	-	XC6404AK13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK14	-	XC6404AK14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK15	-	XC6404AK15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK16	-	XC6404AK16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK17	-	XC6404AK17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK18	-	XC6404AK18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK19	-	XC6404AK19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK20	-	XC6404AK20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK21	-	XC6404AK21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK22	-	XC6404AK22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK23	-	XC6404AK23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK24	-	XC6404AK24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK25	-	XC6404AK25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK26	-	XC6404AK26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK27	-	XC6404AK27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK28	-	XC6404AK28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK29	-	XC6404AK29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK30	-	XC6404AK30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK31	-	XC6404AK31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK32	-	XC6404AK32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK33	-	XC6404AK33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK34	-	XC6404AK34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK80	-	XC6404AK80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK81	-	XC6404AK81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK82	-	XC6404AK82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK83	-	XC6404AK83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK84	-	XC6404AK84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3AK85	-	XC6404AK85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK86	-	XC6404AK86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK87	-	XC6404AK87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AK88	-	XC6404AK88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3AL	-	AP6203A-LLGU	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AL	-	AP6203A-LLPU	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	UFN-6	56hq	VR4	9i	Anw
3AL	-	AP6233A-18DHNGU	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AL	-	AP6233A-18DHNPU	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3AL	-	XC6221A491GR	LVR-IC	LDO, 4.9±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3AL	-	XC6227A181ER	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AL	mg	AP6233A-18DHNGU1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AL	mg	AP6233A-18DHNPU1	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3AL01	-	XC6404AL01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL02	-	XC6404AL02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL03	-	XC6404AL03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL04	-	XC6404AL04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL05	-	XC6404AL05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL07	-	XC6404AL07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL08	-	XC6404AL08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL09	-	XC6404AL09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL10	-	XC6404AL10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL11	-	XC6404AL11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL12	-	XC6404AL12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL13	-	XC6404AL13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL14	-	XC6404AL14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL15	-	XC6404AL15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL16	-	XC6404AL16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL17	-	XC6404AL17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL18	-	XC6404AL18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL19	-	XC6404AL19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL20	-	XC6404AL20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL21	-	XC6404AL21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL22	-	XC6404AL22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL23	-	XC6404AL23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL24	-	XC6404AL24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL25	-	XC6404AL25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL26	-	XC6404AL26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL27	-	XC6404AL27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL28	-	XC6404AL28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL29	-	XC6404AL29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL30	-	XC6404AL30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL31	-	XC6404AL31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL32	-	XC6404AL32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL33	-	XC6404AL33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL34	-	XC6404AL34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL80	-	XC6404AL80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL81	-	XC6404AL81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL82	-	XC6404AL82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL83	-	XC6404AL83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL84	-	XC6404AL84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL85	-	XC6404AL85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL86	-	XC6404AL86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL87	-	XC6404AL87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AL88	-	XC6404AL88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM	-	AP6203A-30GU	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AM	-	AP6203A-30PU	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	UFN-6	56hq	VR4	9i	Anw
3AM	-	AP6233A-18DLNGU	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AM	-	AP6233A-18DLNPU	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3AM	-	XC6221A501GR	LVR-IC	LDO, 5.0±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3AM	-	XC6227A191ER	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AM	mg	AP6233A-18DLNGU1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AM	mg	AP6233A-18DLNPU1	LVR-IC	LDO, 1.8V±1%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3AM01	-	XC6404AM01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM02	-	XC6404AM02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM03	-	XC6404AM03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM04	-	XC6404AM04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM05	-	XC6404AM05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM07	-	XC6404AM07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM08	-	XC6404AM08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM09	-	XC6404AM09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3AM10	-	XC6404AM10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM11	-	XC6404AM11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM12	-	XC6404AM12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM13	-	XC6404AM13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM14	-	XC6404AM14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM15	-	XC6404AM15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM16	-	XC6404AM16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM17	-	XC6404AM17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM18	-	XC6404AM18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM19	-	XC6404AM19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM20	-	XC6404AM20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM21	-	XC6404AM21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM22	-	XC6404AM22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM23	-	XC6404AM23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM24	-	XC6404AM24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM25	-	XC6404AM25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM26	-	XC6404AM26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM27	-	XC6404AM27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM28	-	XC6404AM28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM29	-	XC6404AM29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM30	-	XC6404AM30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM31	-	XC6404AM31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM32	-	XC6404AM32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM33	-	XC6404AM33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM34	-	XC6404AM34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM80	-	XC6404AM80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM81	-	XC6404AM81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM82	-	XC6404AM82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM83	-	XC6404AM83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM84	-	XC6404AM84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM85	-	XC6404AM85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM86	-	XC6404AM86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM87	-	XC6404AM87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AM88	-	XC6404AM88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN	-	XC6227A201ER	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AN01	-	XC6404AN01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN02	-	XC6404AN02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN03	-	XC6404AN03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN04	-	XC6404AN04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN05	-	XC6404AN05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN07	-	XC6404AN07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN08	-	XC6404AN08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN09	-	XC6404AN09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN10	-	XC6404AN10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN11	-	XC6404AN11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN12	-	XC6404AN12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN13	-	XC6404AN13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN14	-	XC6404AN14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN15	-	XC6404AN15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN16	-	XC6404AN16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN17	-	XC6404AN17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN18	-	XC6404AN18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN19	-	XC6404AN19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN20	-	XC6404AN20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN21	-	XC6404AN21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN22	-	XC6404AN22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN23	-	XC6404AN23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN24	-	XC6404AN24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN25	-	XC6404AN25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN26	-	XC6404AN26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN27	-	XC6404AN27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN28	-	XC6404AN28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN29	-	XC6404AN29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN30	-	XC6404AN30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN31	-	XC6404AN31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN32	-	XC6404AN32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN33	-	XC6404AN33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN34	-	XC6404AN34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN80	-	XC6404AN80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN81	-	XC6404AN81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3AN82	-	XC6404AN82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN83	-	XC6404AN83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN84	-	XC6404AN84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN85	-	XC6404AN85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN86	-	XC6404AN86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN87	-	XC6404AN87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AN88	-	XC6404AN88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP	-	XC6227A211ER	LVR-IC	LDO, 2.1V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AP01	-	XC6404AP01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP02	-	XC6404AP02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP03	-	XC6404AP03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP04	-	XC6404AP04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP05	-	XC6404AP05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP07	-	XC6404AP07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP08	-	XC6404AP08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP09	-	XC6404AP09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP10	-	XC6404AP10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP11	-	XC6404AP11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP12	-	XC6404AP12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP13	-	XC6404AP13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP14	-	XC6404AP14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP15	-	XC6404AP15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP16	-	XC6404AP16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP17	-	XC6404AP17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP18	-	XC6404AP18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP19	-	XC6404AP19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP20	-	XC6404AP20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP21	-	XC6404AP21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP22	-	XC6404AP22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP23	-	XC6404AP23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP24	-	XC6404AP24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP25	-	XC6404AP25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP26	-	XC6404AP26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP27	-	XC6404AP27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP28	-	XC6404AP28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP29	-	XC6404AP29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP30	-	XC6404AP30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP31	-	XC6404AP31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP32	-	XC6404AP32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP33	-	XC6404AP33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP34	-	XC6404AP34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP80	-	XC6404AP80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP81	-	XC6404AP81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP82	-	XC6404AP82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP83	-	XC6404AP83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP84	-	XC6404AP84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP85	-	XC6404AP85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP86	-	XC6404AP86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP87	-	XC6404AP87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AP88	-	XC6404AP88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3AQ	-	AP6203A-33GU	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AQ	-	AP6203A-33PU	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	UFN-6	56hq	VR4	9i	Anw
3AR	-	XC6227A221ER	LVR-IC	LDO, 2.2V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AR01	-	XC6404AR01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR02	-	XC6404AR02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR03	-	XC6404AR03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR04	-	XC6404AR04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR05	-	XC6404AR05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR07	-	XC6404AR07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR08	-	XC6404AR08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR09	-	XC6404AR09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR10	-	XC6404AR10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR11	-	XC6404AR11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR12	-	XC6404AR12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR13	-	XC6404AR13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR14	-	XC6404AR14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR15	-	XC6404AR15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR16	-	XC6404AR16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR17	-	XC6404AR17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR18	-	XC6404AR18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3AR19	-	XC6404AR19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR20	-	XC6404AR20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR21	-	XC6404AR21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR22	-	XC6404AR22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR23	-	XC6404AR23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR24	-	XC6404AR24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR25	-	XC6404AR25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR26	-	XC6404AR26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR27	-	XC6404AR27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR28	-	XC6404AR28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR29	-	XC6404AR29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR30	-	XC6404AR30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR31	-	XC6404AR31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR32	-	XC6404AR32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR33	-	XC6404AR33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR34	-	XC6404AR34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR80	-	XC6404AR80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR81	-	XC6404AR81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR82	-	XC6404AR82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR83	-	XC6404AR83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR84	-	XC6404AR84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR85	-	XC6404AR85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR86	-	XC6404AR86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AR87	-	XC6404AR87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS	-	AP6203A-42GU	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AS	-	AP6203A-42PU	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	UFN-6	56hq	VR4	9i	Anw
3AS	-	XC6227A231ER	LVR-IC	LDO, 2.3V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AS01	-	XC6404AS01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS02	-	XC6404AS02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS03	-	XC6404AS03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS04	-	XC6404AS04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS05	-	XC6404AS05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS07	-	XC6404AS07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS08	-	XC6404AS08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS09	-	XC6404AS09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS10	-	XC6404AS10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS11	-	XC6404AS11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS12	-	XC6404AS12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS13	-	XC6404AS13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS14	-	XC6404AS14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS15	-	XC6404AS15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS16	-	XC6404AS16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS17	-	XC6404AS17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS18	-	XC6404AS18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS19	-	XC6404AS19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS20	-	XC6404AS20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS21	-	XC6404AS21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS22	-	XC6404AS22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS23	-	XC6404AS23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS24	-	XC6404AS24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS25	-	XC6404AS25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS26	-	XC6404AS26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS27	-	XC6404AS27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS28	-	XC6404AS28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS29	-	XC6404AS29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS30	-	XC6404AS30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS31	-	XC6404AS31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS32	-	XC6404AS32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS33	-	XC6404AS33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS34	-	XC6404AS34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS80	-	XC6404AS80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS81	-	XC6404AS81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS82	-	XC6404AS82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS83	-	XC6404AS83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS84	-	XC6404AS84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS85	-	XC6404AS85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS86	-	XC6404AS86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS87	-	XC6404AS87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AS88	-	XC6404AS88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT	-	XC6227A241ER	LVR-IC	LDO, 2.4V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3AT01	-	XC6404AT01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT02	-	XC6404AT02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT03	-	XC6404AT03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT04	-	XC6404AT04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT05	-	XC6404AT05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT07	-	XC6404AT07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT08	-	XC6404AT08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT09	-	XC6404AT09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT10	-	XC6404AT10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT11	-	XC6404AT11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT12	-	XC6404AT12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT13	-	XC6404AT13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT14	-	XC6404AT14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT15	-	XC6404AT15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT16	-	XC6404AT16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT17	-	XC6404AT17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT18	-	XC6404AT18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT19	-	XC6404AT19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT20	-	XC6404AT20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT21	-	XC6404AT21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT22	-	XC6404AT22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT23	-	XC6404AT23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT24	-	XC6404AT24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT25	-	XC6404AT25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT26	-	XC6404AT26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT27	-	XC6404AT27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT28	-	XC6404AT28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT29	-	XC6404AT29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT30	-	XC6404AT30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT31	-	XC6404AT31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT32	-	XC6404AT32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT33	-	XC6404AT33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT34	-	XC6404AT34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT80	-	XC6404AT80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT81	-	XC6404AT81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT82	-	XC6404AT82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT83	-	XC6404AT83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT84	-	XC6404AT84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT85	-	XC6404AT85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT86	-	XC6404AT86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT87	-	XC6404AT87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AT88	-	XC6404AT88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU	-	XC6227A251ER	LVR-IC	LDO, 2.5V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AU01	-	XC6404AU01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU02	-	XC6404AU02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU03	-	XC6404AU03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU04	-	XC6404AU04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU05	-	XC6404AU05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU07	-	XC6404AU07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU08	-	XC6404AU08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU09	-	XC6404AU09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU10	-	XC6404AU10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU11	-	XC6404AU11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU12	-	XC6404AU12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU13	-	XC6404AU13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU14	-	XC6404AU14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU15	-	XC6404AU15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU16	-	XC6404AU16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU17	-	XC6404AU17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU18	-	XC6404AU18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU19	-	XC6404AU19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU20	-	XC6404AU20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU21	-	XC6404AU21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU22	-	XC6404AU22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU23	-	XC6404AU23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU24	-	XC6404AU24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU25	-	XC6404AU25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU26	-	XC6404AU26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU27	-	XC6404AU27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU28	-	XC6404AU28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3AU29	-	XC6404AU29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU30	-	XC6404AU30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU31	-	XC6404AU31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU32	-	XC6404AU32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU33	-	XC6404AU33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU34	-	XC6404AU34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU80	-	XC6404AU80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU81	-	XC6404AU81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU82	-	XC6404AU82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU83	-	XC6404AU83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU84	-	XC6404AU84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU85	-	XC6404AU85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU86	-	XC6404AU86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU87	-	XC6404AU87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AU88	-	XC6404AU88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3AV	-	AP6203A-36GU	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3AV	-	AP6203A-36PU	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	UFN-6	56hq	VR4	9i	Anw
3AV	-	XC6227A261ER	LVR-IC	LDO, 2.6V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AX	-	XC6227A271ER	LVR-IC	LDO, 2.7V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AY	-	XC6227A281ER	LVR-IC	LDO, 2.8V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3AZ	-	XC6227A291ER	LVR-IC	LDO, 2.9V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3B	-	R3117K081C	Vdet-IC	0.8V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3B	-	RP101K131B	LVR-IC	LDO, LN, 1.3V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3B	-	RP112K121D5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3B	-	RP173K121B5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3B	-	XC6217D1227R-G	LVR-IC	LDO, 1.2V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3B	-	XC6221C49B7R	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9a	Tor
3B	-	XC6223D2119R-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3B	-	XC6224B19B7R	LVR-IC	LDO, 1.95V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
3B	-	XC6229H3211R-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3B016	-	XC6106B016ER	Vdet-IC	1.6V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B017	-	XC6106B017ER	Vdet-IC	1.7V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B018	-	XC6106B018ER	Vdet-IC	1.8V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B019	-	XC6106B019ER	Vdet-IC	1.9V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B020	-	XC6106B020ER	Vdet-IC	2.0V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B021	-	XC6106B021ER	Vdet-IC	2.1V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B022	-	XC6106B022ER	Vdet-IC	2.2V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B023	-	XC6106B023ER	Vdet-IC	2.3V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B024	-	XC6106B024ER	Vdet-IC	2.4V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B025	-	XC6106B025ER	Vdet-IC	2.5V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B026	-	XC6106B026ER	Vdet-IC	2.6V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B027	-	XC6106B027ER	Vdet-IC	2.7V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B028	-	XC6106B028ER	Vdet-IC	2.8V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B029	-	XC6106B029ER	Vdet-IC	2.9V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B030	-	XC6106B030ER	Vdet-IC	3.0V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B031	-	XC6106B031ER	Vdet-IC	3.1V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B032	-	XC6106B032ER	Vdet-IC	3.2V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B033	-	XC6106B033ER	Vdet-IC	3.3V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B034	-	XC6106B034ER	Vdet-IC	3.4V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B035	-	XC6106B035ER	Vdet-IC	3.5V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B036	-	XC6106B036ER	Vdet-IC	3.6V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B037	-	XC6106B037ER	Vdet-IC	3.7V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B038	-	XC6106B038ER	Vdet-IC	3.8V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B039	-	XC6106B039ER	Vdet-IC	3.9V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B040	-	XC6106B040ER	Vdet-IC	4.0V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B041	-	XC6106B041ER	Vdet-IC	4.1V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B042	-	XC6106B042ER	Vdet-IC	4.2V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B043	-	XC6106B043ER	Vdet-IC	4.3V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B044	-	XC6106B044ER	Vdet-IC	4.4V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B045	-	XC6106B045ER	Vdet-IC	4.5V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B046	-	XC6106B046ER	Vdet-IC	4.6V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B047	-	XC6106B047ER	Vdet-IC	4.7V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B048	-	XC6106B048ER	Vdet-IC	4.8V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B049	-	XC6106B049ER	Vdet-IC	4.9V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B050	-	XC6106B050ER	Vdet-IC	5.0V±2%, Hst, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
3B1	-	XC6221B321GR	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3B2	-	XC6221B331GR	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3B216	-	XC6101B216ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B217	-	XC6101B217ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B218	-	XC6101B218ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3B219	-	XC6101B219ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B220	-	XC6101B220ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B221	-	XC6101B221ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B222	-	XC6101B222ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B223	-	XC6101B223ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B224	-	XC6101B224ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B225	-	XC6101B225ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B226	-	XC6101B226ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B227	-	XC6101B227ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B228	-	XC6101B228ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B229	-	XC6101B229ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B230	-	XC6101B230ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B231	-	XC6101B231ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B232	-	XC6101B232ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B233	-	XC6101B233ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B234	-	XC6101B234ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B235	-	XC6101B235ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B236	-	XC6101B236ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B237	-	XC6101B237ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B238	-	XC6101B238ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B239	-	XC6101B239ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B240	-	XC6101B240ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B241	-	XC6101B241ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B242	-	XC6101B242ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B243	-	XC6101B243ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B244	-	XC6101B244ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B245	-	XC6101B245ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B246	-	XC6101B246ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B247	-	XC6101B247ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B248	-	XC6101B248ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B249	-	XC6101B249ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B250	-	XC6101B250ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B3	-	XC6221B341GR	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3B316	-	XC6101B316ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B317	-	XC6101B317ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B318	-	XC6101B318ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B319	-	XC6101B319ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B320	-	XC6101B320ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B321	-	XC6101B321ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B322	-	XC6101B322ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B323	-	XC6101B323ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B324	-	XC6101B324ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B325	-	XC6101B325ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B326	-	XC6101B326ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B327	-	XC6101B327ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B328	-	XC6101B328ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B329	-	XC6101B329ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B330	-	XC6101B330ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B331	-	XC6101B331ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B332	-	XC6101B332ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B333	-	XC6101B333ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B334	-	XC6101B334ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B335	-	XC6101B335ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B336	-	XC6101B336ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B337	-	XC6101B337ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B338	-	XC6101B338ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B339	-	XC6101B339ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B340	-	XC6101B340ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B341	-	XC6101B341ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B342	-	XC6101B342ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B343	-	XC6101B343ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B344	-	XC6101B344ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B345	-	XC6101B345ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B346	-	XC6101B346ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B347	-	XC6101B347ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B348	-	XC6101B348ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B349	-	XC6101B349ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B350	-	XC6101B350ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B4	-	XC6221B351GR	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3B416	-	XC6101B416ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3B417	-	XC6101B417ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B418	-	XC6101B418ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B419	-	XC6101B419ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B420	-	XC6101B420ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B421	-	XC6101B421ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B422	-	XC6101B422ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B423	-	XC6101B423ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B424	-	XC6101B424ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B425	-	XC6101B425ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B426	-	XC6101B426ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B427	-	XC6101B427ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B428	-	XC6101B428ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B429	-	XC6101B429ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B430	-	XC6101B430ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B431	-	XC6101B431ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B432	-	XC6101B432ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B433	-	XC6101B433ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B434	-	XC6101B434ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B435	-	XC6101B435ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B436	-	XC6101B436ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B437	-	XC6101B437ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B438	-	XC6101B438ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B439	-	XC6101B439ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B440	-	XC6101B440ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B441	-	XC6101B441ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B442	-	XC6101B442ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B443	-	XC6101B443ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B444	-	XC6101B444ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B445	-	XC6101B445ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B446	-	XC6101B446ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B447	-	XC6101B447ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B448	-	XC6101B448ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B449	-	XC6101B449ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B450	-	XC6101B450ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B5	-	XC6221B361GR	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3B516	-	XC6101B516ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B517	-	XC6101B517ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B518	-	XC6101B518ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B519	-	XC6101B519ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B520	-	XC6101B520ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B521	-	XC6101B521ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B522	-	XC6101B522ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B523	-	XC6101B523ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B524	-	XC6101B524ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B525	-	XC6101B525ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B526	-	XC6101B526ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B527	-	XC6101B527ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B528	-	XC6101B528ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B529	-	XC6101B529ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B530	-	XC6101B530ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B531	-	XC6101B531ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B532	-	XC6101B532ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B533	-	XC6101B533ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B534	-	XC6101B534ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B535	-	XC6101B535ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B536	-	XC6101B536ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B537	-	XC6101B537ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B538	-	XC6101B538ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B539	-	XC6101B539ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B540	-	XC6101B540ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B541	-	XC6101B541ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B542	-	XC6101B542ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B543	-	XC6101B543ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B544	-	XC6101B544ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B545	-	XC6101B545ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B546	-	XC6101B546ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B547	-	XC6101B547ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B548	-	XC6101B548ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B549	-	XC6101B549ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B550	-	XC6101B550ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3B6	-	XC6221B371GR	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3B616	-	XC6101B616ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B617	-	XC6101B617ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B618	-	XC6101B618ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B619	-	XC6101B619ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B620	-	XC6101B620ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B621	-	XC6101B621ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B622	-	XC6101B622ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B623	-	XC6101B623ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B624	-	XC6101B624ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B625	-	XC6101B625ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B626	-	XC6101B626ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B627	-	XC6101B627ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B628	-	XC6101B628ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B629	-	XC6101B629ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B630	-	XC6101B630ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B631	-	XC6101B631ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B632	-	XC6101B632ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B633	-	XC6101B633ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B634	-	XC6101B634ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B635	-	XC6101B635ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B636	-	XC6101B636ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B637	-	XC6101B637ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B638	-	XC6101B638ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B639	-	XC6101B639ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B640	-	XC6101B640ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B641	-	XC6101B641ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B642	-	XC6101B642ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B643	-	XC6101B643ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B644	-	XC6101B644ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B645	-	XC6101B645ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B646	-	XC6101B646ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B647	-	XC6101B647ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B648	-	XC6101B648ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B649	-	XC6101B649ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B650	-	XC6101B650ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
3B7	-	XC6221B381GR	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3B8	-	XC6221B391GR	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3B8	-	XC6227A08BER	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3B9	-	XC6221B401GR	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3B9	-	XC6227A09BER	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BA	-	XC6221B411GR	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3BA	-	XC6227A10BER	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BA01	-	XC6404BA01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA02	-	XC6404BA02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA03	-	XC6404BA03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA04	-	XC6404BA04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA05	-	XC6404BA05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA07	-	XC6404BA07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA08	-	XC6404BA08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA09	-	XC6404BA09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA10	-	XC6404BA10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA11	-	XC6404BA11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA12	-	XC6404BA12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA13	-	XC6404BA13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA14	-	XC6404BA14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA15	-	XC6404BA15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA16	-	XC6404BA16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA17	-	XC6404BA17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA18	-	XC6404BA18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA19	-	XC6404BA19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA20	-	XC6404BA20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA21	-	XC6404BA21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA22	-	XC6404BA22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA23	-	XC6404BA23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA24	-	XC6404BA24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA25	-	XC6404BA25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA26	-	XC6404BA26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA27	-	XC6404BA27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA28	-	XC6404BA28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3BA29	-	XC6404BA29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA30	-	XC6404BA30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA31	-	XC6404BA31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA32	-	XC6404BA32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA33	-	XC6404BA33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA34	-	XC6404BA34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA80	-	XC6404BA80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA81	-	XC6404BA81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA82	-	XC6404BA82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA83	-	XC6404BA83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA84	-	XC6404BA84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA85	-	XC6404BA85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA86	-	XC6404BA86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA87	-	XC6404BA87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BA88	-	XC6404BA88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB	-	XC6221B421GR	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3BB	-	XC6227A11BER	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BB01	-	XC6404BB01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB02	-	XC6404BB02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB03	-	XC6404BB03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB04	-	XC6404BB04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB05	-	XC6404BB05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB07	-	XC6404BB07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB08	-	XC6404BB08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB09	-	XC6404BB09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB10	-	XC6404BB10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB11	-	XC6404BB11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB12	-	XC6404BB12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB13	-	XC6404BB13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB14	-	XC6404BB14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB15	-	XC6404BB15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB16	-	XC6404BB16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB17	-	XC6404BB17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB18	-	XC6404BB18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB19	-	XC6404BB19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB20	-	XC6404BB20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB21	-	XC6404BB21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB22	-	XC6404BB22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB23	-	XC6404BB23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB24	-	XC6404BB24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB25	-	XC6404BB25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB26	-	XC6404BB26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB27	-	XC6404BB27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB28	-	XC6404BB28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB29	-	XC6404BB29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB30	-	XC6404BB30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB31	-	XC6404BB31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB32	-	XC6404BB32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB33	-	XC6404BB33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB34	-	XC6404BB34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB80	-	XC6404BB80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB81	-	XC6404BB81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB82	-	XC6404BB82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB83	-	XC6404BB83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB84	-	XC6404BB84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB85	-	XC6404BB85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB86	-	XC6404BB86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB87	-	XC6404BB87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BB88	-	XC6404BB88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC	-	XC6221B431GR	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3BC	-	XC6227A12BER	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BC01	-	XC6404BC01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC02	-	XC6404BC02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC03	-	XC6404BC03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC04	-	XC6404BC04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC05	-	XC6404BC05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC07	-	XC6404BC07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC08	-	XC6404BC08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC09	-	XC6404BC09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC10	-	XC6404BC10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3BC11	-	XC6404BC11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC12	-	XC6404BC12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC13	-	XC6404BC13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC14	-	XC6404BC14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC15	-	XC6404BC15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC16	-	XC6404BC16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC17	-	XC6404BC17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC18	-	XC6404BC18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC19	-	XC6404BC19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC20	-	XC6404BC20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC21	-	XC6404BC21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC22	-	XC6404BC22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC23	-	XC6404BC23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC24	-	XC6404BC24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC25	-	XC6404BC25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC26	-	XC6404BC26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC27	-	XC6404BC27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC28	-	XC6404BC28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC29	-	XC6404BC29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC30	-	XC6404BC30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC31	-	XC6404BC31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC32	-	XC6404BC32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC33	-	XC6404BC33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC34	-	XC6404BC34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC80	-	XC6404BC80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC81	-	XC6404BC81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC82	-	XC6404BC82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC83	-	XC6404BC83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC84	-	XC6404BC84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC85	-	XC6404BC85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC86	-	XC6404BC86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC87	-	XC6404BC87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BC88	-	XC6404BC88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD	-	XC6221B441GR	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3BD	-	XC6227A13BER	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BD01	-	XC6404BD01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD02	-	XC6404BD02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD03	-	XC6404BD03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD04	-	XC6404BD04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD05	-	XC6404BD05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD07	-	XC6404BD07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD08	-	XC6404BD08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD09	-	XC6404BD09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD10	-	XC6404BD10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD11	-	XC6404BD11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD12	-	XC6404BD12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD13	-	XC6404BD13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD14	-	XC6404BD14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD15	-	XC6404BD15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD16	-	XC6404BD16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD17	-	XC6404BD17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD18	-	XC6404BD18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD19	-	XC6404BD19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD20	-	XC6404BD20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD21	-	XC6404BD21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD22	-	XC6404BD22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD23	-	XC6404BD23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD24	-	XC6404BD24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD25	-	XC6404BD25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD26	-	XC6404BD26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD27	-	XC6404BD27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD28	-	XC6404BD28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD29	-	XC6404BD29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD30	-	XC6404BD30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD31	-	XC6404BD31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD32	-	XC6404BD32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD33	-	XC6404BD33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD34	-	XC6404BD34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD80	-	XC6404BD80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD81	-	XC6404BD81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3BD82	-	XC6404BD82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD83	-	XC6404BD83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD84	-	XC6404BD84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD85	-	XC6404BD85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD86	-	XC6404BD86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD87	-	XC6404BD87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BD88	-	XC6404BD88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3BE	-	XC6221B451GR	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3BE	-	XC6227A14BER	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BE01	-	XC6404BE01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE02	-	XC6404BE02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE03	-	XC6404BE03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE04	-	XC6404BE04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE05	-	XC6404BE05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE07	-	XC6404BE07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE08	-	XC6404BE08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE09	-	XC6404BE09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE10	-	XC6404BE10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE11	-	XC6404BE11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE12	-	XC6404BE12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE13	-	XC6404BE13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE14	-	XC6404BE14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE15	-	XC6404BE15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE16	-	XC6404BE16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE17	-	XC6404BE17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE18	-	XC6404BE18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE19	-	XC6404BE19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE20	-	XC6404BE20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE21	-	XC6404BE21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE22	-	XC6404BE22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE23	-	XC6404BE23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE24	-	XC6404BE24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE25	-	XC6404BE25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE26	-	XC6404BE26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE27	-	XC6404BE27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE28	-	XC6404BE28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE29	-	XC6404BE29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE30	-	XC6404BE30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE31	-	XC6404BE31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE32	-	XC6404BE32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE33	-	XC6404BE33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE34	-	XC6404BE34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE80	-	XC6404BE80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE81	-	XC6404BE81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE82	-	XC6404BE82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE83	-	XC6404BE83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE84	-	XC6404BE84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE85	-	XC6404BE85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE86	-	XC6404BE86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE87	-	XC6404BE87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BE88	-	XC6404BE88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF	-	XC6221B461GR	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3BF	-	XC6227A15BER	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BF01	-	XC6404BF01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF02	-	XC6404BF02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF03	-	XC6404BF03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF04	-	XC6404BF04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF05	-	XC6404BF05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF07	-	XC6404BF07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF08	-	XC6404BF08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF09	-	XC6404BF09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF10	-	XC6404BF10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF11	-	XC6404BF11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF12	-	XC6404BF12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF13	-	XC6404BF13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF14	-	XC6404BF14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF15	-	XC6404BF15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF16	-	XC6404BF16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF17	-	XC6404BF17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF18	-	XC6404BF18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3BF19	-	XC6404BF19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF20	-	XC6404BF20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF21	-	XC6404BF21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF22	-	XC6404BF22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF23	-	XC6404BF23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF24	-	XC6404BF24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF25	-	XC6404BF25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF26	-	XC6404BF26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF27	-	XC6404BF27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF28	-	XC6404BF28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF29	-	XC6404BF29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF30	-	XC6404BF30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF31	-	XC6404BF31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF32	-	XC6404BF32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF33	-	XC6404BF33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF34	-	XC6404BF34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF80	-	XC6404BF80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF81	-	XC6404BF81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF82	-	XC6404BF82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF83	-	XC6404BF83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF84	-	XC6404BF84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF85	-	XC6404BF85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF86	-	XC6404BF86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF87	-	XC6404BF87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BF88	-	XC6404BF88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH	-	XC6221B471GR	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3BH	-	XC6227A16BER	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BH01	-	XC6404BH01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH02	-	XC6404BH02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH03	-	XC6404BH03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH04	-	XC6404BH04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH05	-	XC6404BH05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH07	-	XC6404BH07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH08	-	XC6404BH08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH09	-	XC6404BH09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH10	-	XC6404BH10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH11	-	XC6404BH11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH12	-	XC6404BH12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH13	-	XC6404BH13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH14	-	XC6404BH14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH15	-	XC6404BH15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH16	-	XC6404BH16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH17	-	XC6404BH17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH18	-	XC6404BH18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH19	-	XC6404BH19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH20	-	XC6404BH20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH21	-	XC6404BH21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH22	-	XC6404BH22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH23	-	XC6404BH23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH24	-	XC6404BH24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH25	-	XC6404BH25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH26	-	XC6404BH26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH27	-	XC6404BH27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH28	-	XC6404BH28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH29	-	XC6404BH29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH30	-	XC6404BH30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH31	-	XC6404BH31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH32	-	XC6404BH32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH33	-	XC6404BH33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH34	-	XC6404BH34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH80	-	XC6404BH80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH81	-	XC6404BH81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH82	-	XC6404BH82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH83	-	XC6404BH83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH84	-	XC6404BH84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH85	-	XC6404BH85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH86	-	XC6404BH86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH87	-	XC6404BH87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BH88	-	XC6404BH88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK	-	XC6221B481GR	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3BK	-	XC6227A17BER	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BK01	-	XC6404BK01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK02	-	XC6404BK02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK03	-	XC6404BK03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK04	-	XC6404BK04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK05	-	XC6404BK05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK07	-	XC6404BK07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK08	-	XC6404BK08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK09	-	XC6404BK09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK10	-	XC6404BK10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK11	-	XC6404BK11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK12	-	XC6404BK12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK13	-	XC6404BK13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK14	-	XC6404BK14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK15	-	XC6404BK15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK16	-	XC6404BK16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK17	-	XC6404BK17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK18	-	XC6404BK18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK19	-	XC6404BK19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK20	-	XC6404BK20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK21	-	XC6404BK21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK22	-	XC6404BK22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK23	-	XC6404BK23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK24	-	XC6404BK24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK25	-	XC6404BK25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK26	-	XC6404BK26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK27	-	XC6404BK27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK28	-	XC6404BK28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK29	-	XC6404BK29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK30	-	XC6404BK30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK31	-	XC6404BK31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK32	-	XC6404BK32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK33	-	XC6404BK33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK34	-	XC6404BK34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK80	-	XC6404BK80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK81	-	XC6404BK81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK82	-	XC6404BK82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK83	-	XC6404BK83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK84	-	XC6404BK84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK85	-	XC6404BK85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK86	-	XC6404BK86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK87	-	XC6404BK87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BK88	-	XC6404BK88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3BL	-	XC6221B491GR	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3BL	-	XC6227A18BER	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BL01	-	XC6404BL01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL02	-	XC6404BL02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL03	-	XC6404BL03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL04	-	XC6404BL04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL05	-	XC6404BL05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL07	-	XC6404BL07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL08	-	XC6404BL08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL09	-	XC6404BL09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL10	-	XC6404BL10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL11	-	XC6404BL11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL12	-	XC6404BL12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL13	-	XC6404BL13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL14	-	XC6404BL14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL15	-	XC6404BL15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL16	-	XC6404BL16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL17	-	XC6404BL17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL18	-	XC6404BL18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL19	-	XC6404BL19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL20	-	XC6404BL20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL21	-	XC6404BL21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL22	-	XC6404BL22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL23	-	XC6404BL23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL24	-	XC6404BL24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL25	-	XC6404BL25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL26	-	XC6404BL26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3BL27	-	XC6404BL27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL28	-	XC6404BL28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL29	-	XC6404BL29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL30	-	XC6404BL30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL31	-	XC6404BL31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL32	-	XC6404BL32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL33	-	XC6404BL33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL34	-	XC6404BL34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL80	-	XC6404BL80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL81	-	XC6404BL81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL82	-	XC6404BL82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL83	-	XC6404BL83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL84	-	XC6404BL84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL85	-	XC6404BL85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL86	-	XC6404BL86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL87	-	XC6404BL87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BL88	-	XC6404BL88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM	-	XC6221B501GR	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3BM	-	XC6227A19BER	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BM01	-	XC6404BM01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM02	-	XC6404BM02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM03	-	XC6404BM03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM04	-	XC6404BM04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM05	-	XC6404BM05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM07	-	XC6404BM07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM08	-	XC6404BM08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM09	-	XC6404BM09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM10	-	XC6404BM10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM11	-	XC6404BM11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM12	-	XC6404BM12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM13	-	XC6404BM13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM14	-	XC6404BM14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM15	-	XC6404BM15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM16	-	XC6404BM16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM17	-	XC6404BM17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM18	-	XC6404BM18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM19	-	XC6404BM19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM20	-	XC6404BM20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM21	-	XC6404BM21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM22	-	XC6404BM22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM23	-	XC6404BM23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM24	-	XC6404BM24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM25	-	XC6404BM25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM26	-	XC6404BM26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM27	-	XC6404BM27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM28	-	XC6404BM28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM29	-	XC6404BM29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM30	-	XC6404BM30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM31	-	XC6404BM31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM32	-	XC6404BM32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM33	-	XC6404BM33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM34	-	XC6404BM34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM80	-	XC6404BM80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM81	-	XC6404BM81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM82	-	XC6404BM82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM83	-	XC6404BM83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM84	-	XC6404BM84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM85	-	XC6404BM85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM86	-	XC6404BM86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM87	-	XC6404BM87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BM88	-	XC6404BM88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN	-	XC6227A20BER	LVR-IC	LDO, 2.05V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BN01	-	XC6404BN01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN02	-	XC6404BN02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN03	-	XC6404BN03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN04	-	XC6404BN04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN05	-	XC6404BN05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN07	-	XC6404BN07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN08	-	XC6404BN08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN09	-	XC6404BN09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3BN10	-	XC6404BN10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN11	-	XC6404BN11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN12	-	XC6404BN12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN13	-	XC6404BN13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN14	-	XC6404BN14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN15	-	XC6404BN15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN16	-	XC6404BN16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN17	-	XC6404BN17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN18	-	XC6404BN18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN19	-	XC6404BN19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN20	-	XC6404BN20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN21	-	XC6404BN21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN22	-	XC6404BN22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN23	-	XC6404BN23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN24	-	XC6404BN24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN25	-	XC6404BN25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN26	-	XC6404BN26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN27	-	XC6404BN27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN28	-	XC6404BN28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN29	-	XC6404BN29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN30	-	XC6404BN30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN31	-	XC6404BN31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN32	-	XC6404BN32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN33	-	XC6404BN33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN34	-	XC6404BN34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN80	-	XC6404BN80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN81	-	XC6404BN81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN82	-	XC6404BN82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN83	-	XC6404BN83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN84	-	XC6404BN84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN85	-	XC6404BN85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN86	-	XC6404BN86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN87	-	XC6404BN87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BN88	-	XC6404BN88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP	-	XC6227A21BER	LVR-IC	LDO, 2.15V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BP01	-	XC6404BP01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP02	-	XC6404BP02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP03	-	XC6404BP03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP04	-	XC6404BP04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP05	-	XC6404BP05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP07	-	XC6404BP07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP08	-	XC6404BP08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP09	-	XC6404BP09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP10	-	XC6404BP10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP11	-	XC6404BP11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP12	-	XC6404BP12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP13	-	XC6404BP13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP14	-	XC6404BP14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP15	-	XC6404BP15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP16	-	XC6404BP16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP17	-	XC6404BP17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP18	-	XC6404BP18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP19	-	XC6404BP19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP20	-	XC6404BP20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP21	-	XC6404BP21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP22	-	XC6404BP22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP23	-	XC6404BP23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP24	-	XC6404BP24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP25	-	XC6404BP25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP26	-	XC6404BP26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP27	-	XC6404BP27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP28	-	XC6404BP28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP29	-	XC6404BP29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP30	-	XC6404BP30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP31	-	XC6404BP31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP32	-	XC6404BP32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP33	-	XC6404BP33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP34	-	XC6404BP34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP80	-	XC6404BP80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP81	-	XC6404BP81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3BP82	-	XC6404BP82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP83	-	XC6404BP83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP84	-	XC6404BP84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP85	-	XC6404BP85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP86	-	XC6404BP86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP87	-	XC6404BP87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BP88	-	XC6404BP88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3BR	-	XC6227A22BER	LVR-IC	LDO, 2.25V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BR01	-	XC6404BR01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR02	-	XC6404BR02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR03	-	XC6404BR03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR04	-	XC6404BR04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR05	-	XC6404BR05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR07	-	XC6404BR07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR08	-	XC6404BR08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR09	-	XC6404BR09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR10	-	XC6404BR10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR11	-	XC6404BR11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR12	-	XC6404BR12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR13	-	XC6404BR13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR14	-	XC6404BR14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR15	-	XC6404BR15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR16	-	XC6404BR16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR17	-	XC6404BR17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR18	-	XC6404BR18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR19	-	XC6404BR19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR20	-	XC6404BR20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR21	-	XC6404BR21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR22	-	XC6404BR22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR23	-	XC6404BR23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR24	-	XC6404BR24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR25	-	XC6404BR25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR26	-	XC6404BR26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR27	-	XC6404BR27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR28	-	XC6404BR28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR29	-	XC6404BR29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR30	-	XC6404BR30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR31	-	XC6404BR31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR32	-	XC6404BR32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR33	-	XC6404BR33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR34	-	XC6404BR34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR80	-	XC6404BR80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR81	-	XC6404BR81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR82	-	XC6404BR82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR83	-	XC6404BR83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR84	-	XC6404BR84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR85	-	XC6404BR85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR86	-	XC6404BR86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BR87	-	XC6404BR87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS	-	XC6227A23BER	LVR-IC	LDO, 2.35V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BS01	-	XC6404BS01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS02	-	XC6404BS02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS03	-	XC6404BS03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS04	-	XC6404BS04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS05	-	XC6404BS05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS07	-	XC6404BS07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS08	-	XC6404BS08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS09	-	XC6404BS09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS10	-	XC6404BS10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS11	-	XC6404BS11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS12	-	XC6404BS12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS13	-	XC6404BS13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS14	-	XC6404BS14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS15	-	XC6404BS15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS16	-	XC6404BS16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS17	-	XC6404BS17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS18	-	XC6404BS18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS19	-	XC6404BS19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS20	-	XC6404BS20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS21	-	XC6404BS21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3BS22	-	XC6404BS22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS23	-	XC6404BS23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS24	-	XC6404BS24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS25	-	XC6404BS25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS26	-	XC6404BS26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS27	-	XC6404BS27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS28	-	XC6404BS28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS29	-	XC6404BS29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS30	-	XC6404BS30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS31	-	XC6404BS31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS32	-	XC6404BS32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS33	-	XC6404BS33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS34	-	XC6404BS34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS80	-	XC6404BS80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS81	-	XC6404BS81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS82	-	XC6404BS82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS83	-	XC6404BS83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS84	-	XC6404BS84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS85	-	XC6404BS85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS86	-	XC6404BS86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS87	-	XC6404BS87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BS88	-	XC6404BS88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT	-	XC6227A24BER	LVR-IC	LDO, 2.45V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BT01	-	XC6404BT01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT02	-	XC6404BT02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT03	-	XC6404BT03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT04	-	XC6404BT04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT05	-	XC6404BT05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT07	-	XC6404BT07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT08	-	XC6404BT08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT09	-	XC6404BT09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT10	-	XC6404BT10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT11	-	XC6404BT11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT12	-	XC6404BT12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT13	-	XC6404BT13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT14	-	XC6404BT14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT15	-	XC6404BT15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT16	-	XC6404BT16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT17	-	XC6404BT17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT18	-	XC6404BT18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT19	-	XC6404BT19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT20	-	XC6404BT20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT21	-	XC6404BT21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT22	-	XC6404BT22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT23	-	XC6404BT23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT24	-	XC6404BT24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT25	-	XC6404BT25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT26	-	XC6404BT26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT27	-	XC6404BT27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT28	-	XC6404BT28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT29	-	XC6404BT29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT30	-	XC6404BT30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT31	-	XC6404BT31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT32	-	XC6404BT32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT33	-	XC6404BT33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT34	-	XC6404BT34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT80	-	XC6404BT80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT81	-	XC6404BT81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT82	-	XC6404BT82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT83	-	XC6404BT83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT84	-	XC6404BT84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT85	-	XC6404BT85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT86	-	XC6404BT86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT87	-	XC6404BT87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BT88	-	XC6404BT88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU	-	XC6227A25BER	LVR-IC	LDO, 2.55V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BU01	-	XC6404BU01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU02	-	XC6404BU02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU03	-	XC6404BU03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU04	-	XC6404BU04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3BU05	-	XC6404BU05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU07	-	XC6404BU07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU08	-	XC6404BU08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU09	-	XC6404BU09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU10	-	XC6404BU10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU11	-	XC6404BU11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU12	-	XC6404BU12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU13	-	XC6404BU13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU14	-	XC6404BU14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU15	-	XC6404BU15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU16	-	XC6404BU16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU17	-	XC6404BU17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU18	-	XC6404BU18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU19	-	XC6404BU19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU20	-	XC6404BU20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU21	-	XC6404BU21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU22	-	XC6404BU22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU23	-	XC6404BU23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU24	-	XC6404BU24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU25	-	XC6404BU25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU26	-	XC6404BU26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU27	-	XC6404BU27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU28	-	XC6404BU28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU29	-	XC6404BU29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU30	-	XC6404BU30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU31	-	XC6404BU31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU32	-	XC6404BU32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU33	-	XC6404BU33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU34	-	XC6404BU34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU80	-	XC6404BU80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU81	-	XC6404BU81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU82	-	XC6404BU82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU83	-	XC6404BU83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU84	-	XC6404BU84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU85	-	XC6404BU85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU86	-	XC6404BU86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU87	-	XC6404BU87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BU88	-	XC6404BU88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3BV	-	XC6227A26BER	LVR-IC	LDO, 2.65V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BX	-	XC6227A27BER	LVR-IC	LDO, 2.75V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BY	-	XC6227A28BER	LVR-IC	LDO, 2.85V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3BZ	-	XC6227A29BER	LVR-IC	LDO, 2.95V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3C	-	R3117K091C	Vdet-IC	0.9V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3C	-	RP101K151B	LVR-IC	LDO, LN, 1.5V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3C	-	RP112K131D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3C	-	RP173K131B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3C	-	XC6217D1327R-G	LVR-IC	LDO, 1.3V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3C	-	XC6223D2219R-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3C	-	XC6224B20B7R	LVR-IC	LDO, 2.05V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
3C	-	XC6229H32B1R-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3C0	-	XC6227A301ER	LVR-IC	LDO, 3.0V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3C016	-	XC6106C016ER	Vdet-IC	1.6V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C017	-	XC6106C017ER	Vdet-IC	1.7V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C018	-	XC6106C018ER	Vdet-IC	1.8V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C019	-	XC6106C019ER	Vdet-IC	1.9V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C020	-	XC6106C020ER	Vdet-IC	2.0V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C021	-	XC6106C021ER	Vdet-IC	2.1V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C022	-	XC6106C022ER	Vdet-IC	2.2V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C023	-	XC6106C023ER	Vdet-IC	2.3V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C024	-	XC6106C024ER	Vdet-IC	2.4V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C025	-	XC6106C025ER	Vdet-IC	2.5V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C026	-	XC6106C026ER	Vdet-IC	2.6V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C027	-	XC6106C027ER	Vdet-IC	2.7V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C028	-	XC6106C028ER	Vdet-IC	2.8V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C029	-	XC6106C029ER	Vdet-IC	2.9V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C030	-	XC6106C030ER	Vdet-IC	3.0V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C031	-	XC6106C031ER	Vdet-IC	3.1V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C032	-	XC6106C032ER	Vdet-IC	3.2V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C033	-	XC6106C033ER	Vdet-IC	3.3V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C034	-	XC6106C034ER	Vdet-IC	3.4V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3C035	-	XC6106C035ER	Vdet-IC	3.5V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C036	-	XC6106C036ER	Vdet-IC	3.6V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C037	-	XC6106C037ER	Vdet-IC	3.7V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C038	-	XC6106C038ER	Vdet-IC	3.8V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C039	-	XC6106C039ER	Vdet-IC	3.9V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C040	-	XC6106C040ER	Vdet-IC	4.0V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C041	-	XC6106C041ER	Vdet-IC	4.1V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C042	-	XC6106C042ER	Vdet-IC	4.2V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C043	-	XC6106C043ER	Vdet-IC	4.3V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C044	-	XC6106C044ER	Vdet-IC	4.4V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C045	-	XC6106C045ER	Vdet-IC	4.5V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C046	-	XC6106C046ER	Vdet-IC	4.6V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C047	-	XC6106C047ER	Vdet-IC	4.7V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C048	-	XC6106C048ER	Vdet-IC	4.8V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C049	-	XC6106C049ER	Vdet-IC	4.9V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C050	-	XC6106C050ER	Vdet-IC	5.0V±2%, Hst, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
3C1	-	XC6227A311ER	LVR-IC	LDO, 3.1V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3C2	-	XC6227A321ER	LVR-IC	LDO, 3.2V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3C216	-	XC6101C216ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C217	-	XC6101C217ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C218	-	XC6101C218ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C219	-	XC6101C219ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C220	-	XC6101C220ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C221	-	XC6101C221ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C222	-	XC6101C222ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C223	-	XC6101C223ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C224	-	XC6101C224ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C225	-	XC6101C225ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C226	-	XC6101C226ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C227	-	XC6101C227ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C228	-	XC6101C228ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C229	-	XC6101C229ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C230	-	XC6101C230ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C231	-	XC6101C231ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C232	-	XC6101C232ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C233	-	XC6101C233ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C234	-	XC6101C234ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C235	-	XC6101C235ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C236	-	XC6101C236ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C237	-	XC6101C237ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C238	-	XC6101C238ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C239	-	XC6101C239ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C240	-	XC6101C240ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C241	-	XC6101C241ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C242	-	XC6101C242ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C243	-	XC6101C243ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C244	-	XC6101C244ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C245	-	XC6101C245ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C246	-	XC6101C246ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C247	-	XC6101C247ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C248	-	XC6101C248ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C249	-	XC6101C249ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C250	-	XC6101C250ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C3	-	XC6227A331ER	LVR-IC	LDO, 3.3V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3C316	-	XC6101C316ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C317	-	XC6101C317ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C318	-	XC6101C318ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C319	-	XC6101C319ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C320	-	XC6101C320ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C321	-	XC6101C321ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C322	-	XC6101C322ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C323	-	XC6101C323ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C324	-	XC6101C324ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C325	-	XC6101C325ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C326	-	XC6101C326ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C327	-	XC6101C327ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C328	-	XC6101C328ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C329	-	XC6101C329ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C330	-	XC6101C330ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C331	-	XC6101C331ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3C332	-	XC6101C332ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C333	-	XC6101C333ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C334	-	XC6101C334ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C335	-	XC6101C335ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C336	-	XC6101C336ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C337	-	XC6101C337ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C338	-	XC6101C338ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C339	-	XC6101C339ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C340	-	XC6101C340ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C341	-	XC6101C341ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C342	-	XC6101C342ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C343	-	XC6101C343ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C344	-	XC6101C344ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C345	-	XC6101C345ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C346	-	XC6101C346ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C347	-	XC6101C347ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C348	-	XC6101C348ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C349	-	XC6101C349ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C350	-	XC6101C350ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C4	-	XC6227A341ER	LVR-IC	LDO, 3.4V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3C416	-	XC6101C416ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C417	-	XC6101C417ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C418	-	XC6101C418ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C419	-	XC6101C419ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C420	-	XC6101C420ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C421	-	XC6101C421ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C422	-	XC6101C422ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C423	-	XC6101C423ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C424	-	XC6101C424ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C425	-	XC6101C425ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C426	-	XC6101C426ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C427	-	XC6101C427ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C428	-	XC6101C428ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C429	-	XC6101C429ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C430	-	XC6101C430ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C431	-	XC6101C431ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C432	-	XC6101C432ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C433	-	XC6101C433ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C434	-	XC6101C434ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C435	-	XC6101C435ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C436	-	XC6101C436ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C437	-	XC6101C437ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C438	-	XC6101C438ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C439	-	XC6101C439ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C440	-	XC6101C440ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C441	-	XC6101C441ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C442	-	XC6101C442ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C443	-	XC6101C443ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C444	-	XC6101C444ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C445	-	XC6101C445ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C446	-	XC6101C446ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C447	-	XC6101C447ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C448	-	XC6101C448ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C449	-	XC6101C449ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C450	-	XC6101C450ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C5	-	XC6227A351ER	LVR-IC	LDO, 3.5V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3C516	-	XC6101C516ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C517	-	XC6101C517ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C518	-	XC6101C518ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C519	-	XC6101C519ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C520	-	XC6101C520ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C521	-	XC6101C521ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C522	-	XC6101C522ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C523	-	XC6101C523ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C524	-	XC6101C524ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C525	-	XC6101C525ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C526	-	XC6101C526ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C527	-	XC6101C527ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C528	-	XC6101C528ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C529	-	XC6101C529ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3C530	-	XC6101C530ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C531	-	XC6101C531ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C532	-	XC6101C532ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C533	-	XC6101C533ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C534	-	XC6101C534ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C535	-	XC6101C535ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C536	-	XC6101C536ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C537	-	XC6101C537ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C538	-	XC6101C538ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C539	-	XC6101C539ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C540	-	XC6101C540ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C541	-	XC6101C541ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C542	-	XC6101C542ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C543	-	XC6101C543ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C544	-	XC6101C544ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C545	-	XC6101C545ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C546	-	XC6101C546ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C547	-	XC6101C547ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C548	-	XC6101C548ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C549	-	XC6101C549ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C550	-	XC6101C550ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C6	-	XC6227A361ER	LVR-IC	LDO, 3.6V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3C616	-	XC6101C616ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C617	-	XC6101C617ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C618	-	XC6101C618ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C619	-	XC6101C619ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C620	-	XC6101C620ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C621	-	XC6101C621ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C622	-	XC6101C622ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C623	-	XC6101C623ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C624	-	XC6101C624ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C625	-	XC6101C625ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C626	-	XC6101C626ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C627	-	XC6101C627ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C628	-	XC6101C628ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C629	-	XC6101C629ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C630	-	XC6101C630ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C631	-	XC6101C631ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C632	-	XC6101C632ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C633	-	XC6101C633ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C634	-	XC6101C634ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C635	-	XC6101C635ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C636	-	XC6101C636ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C637	-	XC6101C637ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C638	-	XC6101C638ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C639	-	XC6101C639ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C640	-	XC6101C640ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C641	-	XC6101C641ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C642	-	XC6101C642ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C643	-	XC6101C643ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C644	-	XC6101C644ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C645	-	XC6101C645ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C646	-	XC6101C646ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C647	-	XC6101C647ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C648	-	XC6101C648ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C649	-	XC6101C649ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C650	-	XC6101C650ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
3C7	-	XC6227A371ER	LVR-IC	LDO, 3.7V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3C8	-	XC6227A381ER	LVR-IC	LDO, 3.8V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3C9	-	XC6227A391ER	LVR-IC	LDO, 3.9V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3CA	-	XC6227A401ER	LVR-IC	LDO, 4.0V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3CA01	-	XC6404CA01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA02	-	XC6404CA02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA03	-	XC6404CA03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA04	-	XC6404CA04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA05	-	XC6404CA05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA07	-	XC6404CA07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA08	-	XC6404CA08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA09	-	XC6404CA09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA10	-	XC6404CA10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3CA11	-	XC6404CA11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA12	-	XC6404CA12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA13	-	XC6404CA13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA14	-	XC6404CA14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA15	-	XC6404CA15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA16	-	XC6404CA16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA17	-	XC6404CA17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA18	-	XC6404CA18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA19	-	XC6404CA19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA20	-	XC6404CA20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA21	-	XC6404CA21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA22	-	XC6404CA22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA23	-	XC6404CA23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA24	-	XC6404CA24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA25	-	XC6404CA25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA26	-	XC6404CA26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA27	-	XC6404CA27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA28	-	XC6404CA28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA29	-	XC6404CA29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA30	-	XC6404CA30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA31	-	XC6404CA31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA32	-	XC6404CA32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA33	-	XC6404CA33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA34	-	XC6404CA34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA80	-	XC6404CA80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA81	-	XC6404CA81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA82	-	XC6404CA82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA83	-	XC6404CA83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA84	-	XC6404CA84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA85	-	XC6404CA85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA86	-	XC6404CA86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA87	-	XC6404CA87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CA88	-	XC6404CA88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB	-	XC6227A411ER	LVR-IC	LDO, 4.1V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3CB01	-	XC6404CB01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB02	-	XC6404CB02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB03	-	XC6404CB03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB04	-	XC6404CB04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB05	-	XC6404CB05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB07	-	XC6404CB07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB08	-	XC6404CB08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB09	-	XC6404CB09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB10	-	XC6404CB10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB11	-	XC6404CB11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB12	-	XC6404CB12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB13	-	XC6404CB13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB14	-	XC6404CB14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB15	-	XC6404CB15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB16	-	XC6404CB16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB17	-	XC6404CB17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB18	-	XC6404CB18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB19	-	XC6404CB19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB20	-	XC6404CB20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB21	-	XC6404CB21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB22	-	XC6404CB22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB23	-	XC6404CB23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB24	-	XC6404CB24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB25	-	XC6404CB25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB26	-	XC6404CB26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB27	-	XC6404CB27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB28	-	XC6404CB28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB29	-	XC6404CB29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB30	-	XC6404CB30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB31	-	XC6404CB31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB32	-	XC6404CB32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB33	-	XC6404CB33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB34	-	XC6404CB34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB80	-	XC6404CB80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB81	-	XC6404CB81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB82	-	XC6404CB82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3CB83	-	XC6404CB83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB84	-	XC6404CB84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB85	-	XC6404CB85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB86	-	XC6404CB86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB87	-	XC6404CB87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CB88	-	XC6404CB88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC	-	XC6227A421ER	LVR-IC	LDO, 4.2V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3CC01	-	XC6404CC01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC02	-	XC6404CC02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC03	-	XC6404CC03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC04	-	XC6404CC04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC05	-	XC6404CC05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC07	-	XC6404CC07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC08	-	XC6404CC08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC09	-	XC6404CC09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC10	-	XC6404CC10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC11	-	XC6404CC11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC12	-	XC6404CC12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC13	-	XC6404CC13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC14	-	XC6404CC14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC15	-	XC6404CC15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC16	-	XC6404CC16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC17	-	XC6404CC17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC18	-	XC6404CC18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC19	-	XC6404CC19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC20	-	XC6404CC20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC21	-	XC6404CC21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC22	-	XC6404CC22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC23	-	XC6404CC23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC24	-	XC6404CC24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC25	-	XC6404CC25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC26	-	XC6404CC26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC27	-	XC6404CC27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC28	-	XC6404CC28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC29	-	XC6404CC29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC30	-	XC6404CC30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC31	-	XC6404CC31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC32	-	XC6404CC32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC33	-	XC6404CC33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC34	-	XC6404CC34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC80	-	XC6404CC80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC81	-	XC6404CC81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC82	-	XC6404CC82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC83	-	XC6404CC83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC84	-	XC6404CC84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC85	-	XC6404CC85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC86	-	XC6404CC86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC87	-	XC6404CC87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CC88	-	XC6404CC88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD	-	XC6227A431ER	LVR-IC	LDO, 4.3V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3CD01	-	XC6404CD01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD02	-	XC6404CD02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD03	-	XC6404CD03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD04	-	XC6404CD04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD05	-	XC6404CD05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD07	-	XC6404CD07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD08	-	XC6404CD08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD09	-	XC6404CD09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD10	-	XC6404CD10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD11	-	XC6404CD11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD12	-	XC6404CD12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD13	-	XC6404CD13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD14	-	XC6404CD14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD15	-	XC6404CD15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD16	-	XC6404CD16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD17	-	XC6404CD17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD18	-	XC6404CD18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD19	-	XC6404CD19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD20	-	XC6404CD20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD21	-	XC6404CD21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3CD22	-	XC6404CD22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD23	-	XC6404CD23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD24	-	XC6404CD24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD25	-	XC6404CD25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD26	-	XC6404CD26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD27	-	XC6404CD27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD28	-	XC6404CD28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD29	-	XC6404CD29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD30	-	XC6404CD30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD31	-	XC6404CD31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD32	-	XC6404CD32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD33	-	XC6404CD33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD34	-	XC6404CD34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD80	-	XC6404CD80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD81	-	XC6404CD81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD82	-	XC6404CD82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD83	-	XC6404CD83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD84	-	XC6404CD84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD85	-	XC6404CD85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD86	-	XC6404CD86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD87	-	XC6404CD87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CD88	-	XC6404CD88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3CE	-	XC6227A441ER	LVR-IC	LDO, 4.4V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3CE01	-	XC6404CE01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE02	-	XC6404CE02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE03	-	XC6404CE03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE04	-	XC6404CE04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE05	-	XC6404CE05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE07	-	XC6404CE07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE08	-	XC6404CE08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE09	-	XC6404CE09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE10	-	XC6404CE10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE11	-	XC6404CE11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE12	-	XC6404CE12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE13	-	XC6404CE13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE14	-	XC6404CE14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE15	-	XC6404CE15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE16	-	XC6404CE16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE17	-	XC6404CE17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE18	-	XC6404CE18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE19	-	XC6404CE19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE20	-	XC6404CE20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE21	-	XC6404CE21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE22	-	XC6404CE22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE23	-	XC6404CE23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE24	-	XC6404CE24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE25	-	XC6404CE25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE26	-	XC6404CE26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE27	-	XC6404CE27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE28	-	XC6404CE28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE29	-	XC6404CE29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE30	-	XC6404CE30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE31	-	XC6404CE31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE32	-	XC6404CE32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE33	-	XC6404CE33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE34	-	XC6404CE34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE80	-	XC6404CE80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE81	-	XC6404CE81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE82	-	XC6404CE82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE83	-	XC6404CE83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE84	-	XC6404CE84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE85	-	XC6404CE85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE86	-	XC6404CE86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE87	-	XC6404CE87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CE88	-	XC6404CE88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF	-	XC6227A451ER	LVR-IC	LDO, 4.5V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3CF01	-	XC6404CF01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF02	-	XC6404CF02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF03	-	XC6404CF03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF04	-	XC6404CF04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3CF05	-	XC6404CF05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF07	-	XC6404CF07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF08	-	XC6404CF08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF09	-	XC6404CF09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF10	-	XC6404CF10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF11	-	XC6404CF11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF12	-	XC6404CF12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF13	-	XC6404CF13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF14	-	XC6404CF14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF15	-	XC6404CF15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF16	-	XC6404CF16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF17	-	XC6404CF17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF18	-	XC6404CF18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF19	-	XC6404CF19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF20	-	XC6404CF20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF21	-	XC6404CF21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF22	-	XC6404CF22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF23	-	XC6404CF23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF24	-	XC6404CF24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF25	-	XC6404CF25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF26	-	XC6404CF26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF27	-	XC6404CF27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF28	-	XC6404CF28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF29	-	XC6404CF29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF30	-	XC6404CF30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF31	-	XC6404CF31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF32	-	XC6404CF32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF33	-	XC6404CF33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF34	-	XC6404CF34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF80	-	XC6404CF80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF81	-	XC6404CF81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF82	-	XC6404CF82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF83	-	XC6404CF83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF84	-	XC6404CF84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF85	-	XC6404CF85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF86	-	XC6404CF86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF87	-	XC6404CF87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CF88	-	XC6404CF88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH	-	XC6227A461ER	LVR-IC	LDO, 4.6V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3CH01	-	XC6404CH01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH02	-	XC6404CH02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH03	-	XC6404CH03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH04	-	XC6404CH04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH05	-	XC6404CH05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH07	-	XC6404CH07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH08	-	XC6404CH08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH09	-	XC6404CH09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH10	-	XC6404CH10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH11	-	XC6404CH11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH12	-	XC6404CH12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH13	-	XC6404CH13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH14	-	XC6404CH14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH15	-	XC6404CH15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH16	-	XC6404CH16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH17	-	XC6404CH17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH18	-	XC6404CH18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH19	-	XC6404CH19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH20	-	XC6404CH20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH21	-	XC6404CH21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH22	-	XC6404CH22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH23	-	XC6404CH23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH24	-	XC6404CH24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH25	-	XC6404CH25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH26	-	XC6404CH26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH27	-	XC6404CH27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH28	-	XC6404CH28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH29	-	XC6404CH29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH30	-	XC6404CH30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH31	-	XC6404CH31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH32	-	XC6404CH32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3CH33	-	XC6404CH33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH34	-	XC6404CH34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH80	-	XC6404CH80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH81	-	XC6404CH81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH82	-	XC6404CH82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH83	-	XC6404CH83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH84	-	XC6404CH84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH85	-	XC6404CH85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH86	-	XC6404CH86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH87	-	XC6404CH87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CH88	-	XC6404CH88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK	-	XC6227A471ER	LVR-IC	LDO, 4.7V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3CK01	-	XC6404CK01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK02	-	XC6404CK02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK03	-	XC6404CK03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK04	-	XC6404CK04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK05	-	XC6404CK05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK07	-	XC6404CK07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK08	-	XC6404CK08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK09	-	XC6404CK09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK10	-	XC6404CK10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK11	-	XC6404CK11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK12	-	XC6404CK12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK13	-	XC6404CK13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK14	-	XC6404CK14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK15	-	XC6404CK15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK16	-	XC6404CK16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK17	-	XC6404CK17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK18	-	XC6404CK18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK19	-	XC6404CK19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK20	-	XC6404CK20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK21	-	XC6404CK21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK22	-	XC6404CK22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK23	-	XC6404CK23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK24	-	XC6404CK24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK25	-	XC6404CK25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK26	-	XC6404CK26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK27	-	XC6404CK27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK28	-	XC6404CK28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK29	-	XC6404CK29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK30	-	XC6404CK30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK31	-	XC6404CK31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK32	-	XC6404CK32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK33	-	XC6404CK33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK34	-	XC6404CK34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK80	-	XC6404CK80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK81	-	XC6404CK81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK82	-	XC6404CK82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK83	-	XC6404CK83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK84	-	XC6404CK84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK85	-	XC6404CK85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK86	-	XC6404CK86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK87	-	XC6404CK87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CK88	-	XC6404CK88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3CL	-	XC6227A481ER	LVR-IC	LDO, 4.8V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3CL01	-	XC6404CL01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL02	-	XC6404CL02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL03	-	XC6404CL03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL04	-	XC6404CL04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL05	-	XC6404CL05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL07	-	XC6404CL07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL08	-	XC6404CL08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL09	-	XC6404CL09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL10	-	XC6404CL10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL11	-	XC6404CL11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL12	-	XC6404CL12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL13	-	XC6404CL13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL14	-	XC6404CL14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL15	-	XC6404CL15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL16	-	XC6404CL16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3CL17	-	XC6404CL17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL18	-	XC6404CL18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL19	-	XC6404CL19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL20	-	XC6404CL20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL21	-	XC6404CL21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL22	-	XC6404CL22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL23	-	XC6404CL23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL24	-	XC6404CL24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL25	-	XC6404CL25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL26	-	XC6404CL26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL27	-	XC6404CL27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL28	-	XC6404CL28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL29	-	XC6404CL29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL30	-	XC6404CL30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL31	-	XC6404CL31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL32	-	XC6404CL32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL33	-	XC6404CL33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL34	-	XC6404CL34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL80	-	XC6404CL80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL81	-	XC6404CL81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL82	-	XC6404CL82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL83	-	XC6404CL83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL84	-	XC6404CL84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL85	-	XC6404CL85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL86	-	XC6404CL86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL87	-	XC6404CL87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CL88	-	XC6404CL88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM	-	XC6227A491ER	LVR-IC	LDO, 4.9V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3CM01	-	XC6404CM01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM02	-	XC6404CM02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM03	-	XC6404CM03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM04	-	XC6404CM04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM05	-	XC6404CM05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM07	-	XC6404CM07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM08	-	XC6404CM08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM09	-	XC6404CM09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM10	-	XC6404CM10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM11	-	XC6404CM11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM12	-	XC6404CM12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM13	-	XC6404CM13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM14	-	XC6404CM14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM15	-	XC6404CM15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM16	-	XC6404CM16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM17	-	XC6404CM17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM18	-	XC6404CM18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM19	-	XC6404CM19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM20	-	XC6404CM20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM21	-	XC6404CM21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM22	-	XC6404CM22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM23	-	XC6404CM23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM24	-	XC6404CM24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM25	-	XC6404CM25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM26	-	XC6404CM26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM27	-	XC6404CM27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM28	-	XC6404CM28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM29	-	XC6404CM29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM30	-	XC6404CM30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM31	-	XC6404CM31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM32	-	XC6404CM32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM33	-	XC6404CM33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM34	-	XC6404CM34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM80	-	XC6404CM80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM81	-	XC6404CM81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM82	-	XC6404CM82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM83	-	XC6404CM83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM84	-	XC6404CM84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM85	-	XC6404CM85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM86	-	XC6404CM86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM87	-	XC6404CM87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CM88	-	XC6404CM88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3CN	-	XC6227A501ER	LVR-IC	LDO, 5.0V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3CN01	-	XC6404CN01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN02	-	XC6404CN02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN03	-	XC6404CN03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN04	-	XC6404CN04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN05	-	XC6404CN05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN07	-	XC6404CN07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN08	-	XC6404CN08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN09	-	XC6404CN09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN10	-	XC6404CN10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN11	-	XC6404CN11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN12	-	XC6404CN12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN13	-	XC6404CN13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN14	-	XC6404CN14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN15	-	XC6404CN15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN16	-	XC6404CN16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN17	-	XC6404CN17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN18	-	XC6404CN18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN19	-	XC6404CN19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN20	-	XC6404CN20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN21	-	XC6404CN21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN22	-	XC6404CN22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN23	-	XC6404CN23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN24	-	XC6404CN24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN25	-	XC6404CN25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN26	-	XC6404CN26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN27	-	XC6404CN27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN28	-	XC6404CN28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN29	-	XC6404CN29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN30	-	XC6404CN30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN31	-	XC6404CN31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN32	-	XC6404CN32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN33	-	XC6404CN33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN34	-	XC6404CN34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN80	-	XC6404CN80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN81	-	XC6404CN81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN82	-	XC6404CN82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN83	-	XC6404CN83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN84	-	XC6404CN84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN85	-	XC6404CN85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN86	-	XC6404CN86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN87	-	XC6404CN87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CN88	-	XC6404CN88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP01	-	XC6404CP01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP02	-	XC6404CP02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP03	-	XC6404CP03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP04	-	XC6404CP04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP05	-	XC6404CP05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP07	-	XC6404CP07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP08	-	XC6404CP08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP09	-	XC6404CP09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP10	-	XC6404CP10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP11	-	XC6404CP11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP12	-	XC6404CP12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP13	-	XC6404CP13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP14	-	XC6404CP14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP15	-	XC6404CP15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP16	-	XC6404CP16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP17	-	XC6404CP17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP18	-	XC6404CP18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP19	-	XC6404CP19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP20	-	XC6404CP20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP21	-	XC6404CP21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP22	-	XC6404CP22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP23	-	XC6404CP23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP24	-	XC6404CP24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP25	-	XC6404CP25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP26	-	XC6404CP26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP27	-	XC6404CP27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP28	-	XC6404CP28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3CP29	-	XC6404CP29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP30	-	XC6404CP30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP31	-	XC6404CP31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP32	-	XC6404CP32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP33	-	XC6404CP33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP34	-	XC6404CP34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP80	-	XC6404CP80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP81	-	XC6404CP81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP82	-	XC6404CP82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP83	-	XC6404CP83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP84	-	XC6404CP84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP85	-	XC6404CP85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP86	-	XC6404CP86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP87	-	XC6404CP87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CP88	-	XC6404CP88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3CR01	-	XC6404CR01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR02	-	XC6404CR02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR03	-	XC6404CR03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR04	-	XC6404CR04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR05	-	XC6404CR05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR07	-	XC6404CR07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR08	-	XC6404CR08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR09	-	XC6404CR09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR10	-	XC6404CR10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR11	-	XC6404CR11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR12	-	XC6404CR12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR13	-	XC6404CR13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR14	-	XC6404CR14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR15	-	XC6404CR15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR16	-	XC6404CR16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR17	-	XC6404CR17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR18	-	XC6404CR18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR19	-	XC6404CR19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR20	-	XC6404CR20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR21	-	XC6404CR21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR22	-	XC6404CR22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR23	-	XC6404CR23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR24	-	XC6404CR24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR25	-	XC6404CR25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR26	-	XC6404CR26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR27	-	XC6404CR27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR28	-	XC6404CR28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR29	-	XC6404CR29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR30	-	XC6404CR30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR31	-	XC6404CR31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR32	-	XC6404CR32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR33	-	XC6404CR33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR34	-	XC6404CR34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR80	-	XC6404CR80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR81	-	XC6404CR81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR82	-	XC6404CR82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR83	-	XC6404CR83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR84	-	XC6404CR84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR85	-	XC6404CR85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR86	-	XC6404CR86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CR87	-	XC6404CR87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS01	-	XC6404CS01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS02	-	XC6404CS02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS03	-	XC6404CS03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS04	-	XC6404CS04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS05	-	XC6404CS05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS07	-	XC6404CS07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS08	-	XC6404CS08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS09	-	XC6404CS09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS10	-	XC6404CS10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS11	-	XC6404CS11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS12	-	XC6404CS12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS13	-	XC6404CS13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS14	-	XC6404CS14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS15	-	XC6404CS15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3CS16	-	XC6404CS16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS17	-	XC6404CS17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS18	-	XC6404CS18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS19	-	XC6404CS19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS20	-	XC6404CS20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS21	-	XC6404CS21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS22	-	XC6404CS22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS23	-	XC6404CS23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS24	-	XC6404CS24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS25	-	XC6404CS25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS26	-	XC6404CS26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS27	-	XC6404CS27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS28	-	XC6404CS28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS29	-	XC6404CS29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS30	-	XC6404CS30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS31	-	XC6404CS31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS32	-	XC6404CS32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS33	-	XC6404CS33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS34	-	XC6404CS34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS80	-	XC6404CS80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS81	-	XC6404CS81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS82	-	XC6404CS82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS83	-	XC6404CS83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS84	-	XC6404CS84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS85	-	XC6404CS85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS86	-	XC6404CS86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS87	-	XC6404CS87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CS88	-	XC6404CS88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT01	-	XC6404CT01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT02	-	XC6404CT02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT03	-	XC6404CT03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT04	-	XC6404CT04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT05	-	XC6404CT05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT07	-	XC6404CT07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT08	-	XC6404CT08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT09	-	XC6404CT09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT10	-	XC6404CT10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT11	-	XC6404CT11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT12	-	XC6404CT12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT13	-	XC6404CT13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT14	-	XC6404CT14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT15	-	XC6404CT15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT16	-	XC6404CT16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT17	-	XC6404CT17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT18	-	XC6404CT18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT19	-	XC6404CT19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT20	-	XC6404CT20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT21	-	XC6404CT21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT22	-	XC6404CT22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT23	-	XC6404CT23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT24	-	XC6404CT24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT25	-	XC6404CT25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT26	-	XC6404CT26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT27	-	XC6404CT27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT28	-	XC6404CT28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT29	-	XC6404CT29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT30	-	XC6404CT30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT31	-	XC6404CT31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT32	-	XC6404CT32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT33	-	XC6404CT33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT34	-	XC6404CT34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT80	-	XC6404CT80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT81	-	XC6404CT81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT82	-	XC6404CT82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT83	-	XC6404CT83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT84	-	XC6404CT84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT85	-	XC6404CT85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT86	-	XC6404CT86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT87	-	XC6404CT87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CT88	-	XC6404CT88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3CU01	-	XC6404CU01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU02	-	XC6404CU02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU03	-	XC6404CU03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU04	-	XC6404CU04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU05	-	XC6404CU05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU07	-	XC6404CU07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU08	-	XC6404CU08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU09	-	XC6404CU09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU10	-	XC6404CU10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU11	-	XC6404CU11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU12	-	XC6404CU12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU13	-	XC6404CU13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU14	-	XC6404CU14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU15	-	XC6404CU15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU16	-	XC6404CU16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU17	-	XC6404CU17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU18	-	XC6404CU18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU19	-	XC6404CU19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU20	-	XC6404CU20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU21	-	XC6404CU21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU22	-	XC6404CU22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU23	-	XC6404CU23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU24	-	XC6404CU24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU25	-	XC6404CU25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU26	-	XC6404CU26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU27	-	XC6404CU27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU28	-	XC6404CU28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU29	-	XC6404CU29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU30	-	XC6404CU30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU31	-	XC6404CU31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU32	-	XC6404CU32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU33	-	XC6404CU33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU34	-	XC6404CU34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU80	-	XC6404CU80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU81	-	XC6404CU81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU82	-	XC6404CU82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU83	-	XC6404CU83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU84	-	XC6404CU84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU85	-	XC6404CU85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU86	-	XC6404CU86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU87	-	XC6404CU87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3CU88	-	XC6404CU88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3D	-	R3117K101C	Vdet-IC	1.0V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3D	-	RP101K181B	LVR-IC	LDO, LN, 1.8V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3D	-	RP112K141D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3D	-	RP173K141B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3D	-	XC6217D1427R-G	LVR-IC	LDO, 1.4V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3D	-	XC6223D2319R-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3D	-	XC6224B21B7R	LVR-IC	LDO, 2.15V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
3D	-	XC6229H3311R-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3D0	-	XC6227A30BER	LVR-IC	LDO, 3.05V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3D016	-	XC6106D016ER	Vdet-IC	1.6V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D017	-	XC6106D017ER	Vdet-IC	1.7V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D018	-	XC6106D018ER	Vdet-IC	1.8V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D019	-	XC6106D019ER	Vdet-IC	1.9V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D020	-	XC6106D020ER	Vdet-IC	2.0V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D021	-	XC6106D021ER	Vdet-IC	2.1V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D022	-	XC6106D022ER	Vdet-IC	2.2V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D023	-	XC6106D023ER	Vdet-IC	2.3V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D024	-	XC6106D024ER	Vdet-IC	2.4V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D025	-	XC6106D025ER	Vdet-IC	2.5V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D026	-	XC6106D026ER	Vdet-IC	2.6V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D027	-	XC6106D027ER	Vdet-IC	2.7V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D028	-	XC6106D028ER	Vdet-IC	2.8V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D029	-	XC6106D029ER	Vdet-IC	2.9V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D030	-	XC6106D030ER	Vdet-IC	3.0V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D031	-	XC6106D031ER	Vdet-IC	3.1V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D032	-	XC6106D032ER	Vdet-IC	3.2V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D033	-	XC6106D033ER	Vdet-IC	3.3V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D034	-	XC6106D034ER	Vdet-IC	3.4V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3D035	-	XC6106D035ER	Vdet-IC	3.5V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D036	-	XC6106D036ER	Vdet-IC	3.6V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D037	-	XC6106D037ER	Vdet-IC	3.7V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D038	-	XC6106D038ER	Vdet-IC	3.8V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D039	-	XC6106D039ER	Vdet-IC	3.9V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D040	-	XC6106D040ER	Vdet-IC	4.0V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D041	-	XC6106D041ER	Vdet-IC	4.1V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D042	-	XC6106D042ER	Vdet-IC	4.2V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D043	-	XC6106D043ER	Vdet-IC	4.3V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D044	-	XC6106D044ER	Vdet-IC	4.4V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D045	-	XC6106D045ER	Vdet-IC	4.5V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D046	-	XC6106D046ER	Vdet-IC	4.6V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D047	-	XC6106D047ER	Vdet-IC	4.7V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D048	-	XC6106D048ER	Vdet-IC	4.8V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D049	-	XC6106D049ER	Vdet-IC	4.9V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D050	-	XC6106D050ER	Vdet-IC	5.0V±2%, Hst, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
3D1	-	XC6227A31BER	LVR-IC	LDO, 3.15V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3D2	-	XC6227A32BER	LVR-IC	LDO, 3.25V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3D3	-	XC6227A33BER	LVR-IC	LDO, 3.35V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3D316	-	XC6101D316ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D317	-	XC6101D317ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D318	-	XC6101D318ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D319	-	XC6101D319ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D320	-	XC6101D320ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D321	-	XC6101D321ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D322	-	XC6101D322ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D323	-	XC6101D323ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D324	-	XC6101D324ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D325	-	XC6101D325ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D326	-	XC6101D326ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D327	-	XC6101D327ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D328	-	XC6101D328ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D329	-	XC6101D329ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D330	-	XC6101D330ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D331	-	XC6101D331ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D332	-	XC6101D332ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D333	-	XC6101D333ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D334	-	XC6101D334ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D335	-	XC6101D335ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D336	-	XC6101D336ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D337	-	XC6101D337ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D338	-	XC6101D338ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D339	-	XC6101D339ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D340	-	XC6101D340ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D341	-	XC6101D341ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D342	-	XC6101D342ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D343	-	XC6101D343ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D344	-	XC6101D344ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D345	-	XC6101D345ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D346	-	XC6101D346ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D347	-	XC6101D347ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D348	-	XC6101D348ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D349	-	XC6101D349ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D350	-	XC6101D350ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D4	-	XC6227A34BER	LVR-IC	LDO, 3.45V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3D416	-	XC6101D416ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D417	-	XC6101D417ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D418	-	XC6101D418ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D419	-	XC6101D419ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D420	-	XC6101D420ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D421	-	XC6101D421ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D422	-	XC6101D422ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D423	-	XC6101D423ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D424	-	XC6101D424ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D425	-	XC6101D425ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D426	-	XC6101D426ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D427	-	XC6101D427ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D428	-	XC6101D428ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D429	-	XC6101D429ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D430	-	XC6101D430ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3D431	-	XC6101D431ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D432	-	XC6101D432ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D433	-	XC6101D433ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D434	-	XC6101D434ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D435	-	XC6101D435ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D436	-	XC6101D436ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D437	-	XC6101D437ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D438	-	XC6101D438ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D439	-	XC6101D439ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D440	-	XC6101D440ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D441	-	XC6101D441ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D442	-	XC6101D442ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D443	-	XC6101D443ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D444	-	XC6101D444ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D445	-	XC6101D445ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D446	-	XC6101D446ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D447	-	XC6101D447ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D448	-	XC6101D448ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D449	-	XC6101D449ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D450	-	XC6101D450ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D5	-	XC6227A35BER	LVR-IC	LDO, 3.55V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3D516	-	XC6101D516ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D517	-	XC6101D517ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D518	-	XC6101D518ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D519	-	XC6101D519ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D520	-	XC6101D520ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D521	-	XC6101D521ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D522	-	XC6101D522ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D523	-	XC6101D523ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D524	-	XC6101D524ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D525	-	XC6101D525ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D526	-	XC6101D526ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D527	-	XC6101D527ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D528	-	XC6101D528ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D529	-	XC6101D529ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D530	-	XC6101D530ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D531	-	XC6101D531ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D532	-	XC6101D532ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D533	-	XC6101D533ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D534	-	XC6101D534ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D535	-	XC6101D535ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D536	-	XC6101D536ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D537	-	XC6101D537ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D538	-	XC6101D538ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D539	-	XC6101D539ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D540	-	XC6101D540ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D541	-	XC6101D541ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D542	-	XC6101D542ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D543	-	XC6101D543ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D544	-	XC6101D544ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D545	-	XC6101D545ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D546	-	XC6101D546ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D547	-	XC6101D547ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D548	-	XC6101D548ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D549	-	XC6101D549ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D550	-	XC6101D550ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D6	-	XC6227A36BER	LVR-IC	LDO, 3.65V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3D616	-	XC6101D616ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D617	-	XC6101D617ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D618	-	XC6101D618ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D619	-	XC6101D619ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D620	-	XC6101D620ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D621	-	XC6101D621ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D622	-	XC6101D622ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D623	-	XC6101D623ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D624	-	XC6101D624ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D625	-	XC6101D625ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D626	-	XC6101D626ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D627	-	XC6101D627ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D628	-	XC6101D628ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3D629	-	XC6101D629ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D630	-	XC6101D630ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D631	-	XC6101D631ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D632	-	XC6101D632ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D633	-	XC6101D633ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D634	-	XC6101D634ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D635	-	XC6101D635ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D636	-	XC6101D636ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D637	-	XC6101D637ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D638	-	XC6101D638ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D639	-	XC6101D639ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D640	-	XC6101D640ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D641	-	XC6101D641ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D642	-	XC6101D642ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D643	-	XC6101D643ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D644	-	XC6101D644ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D645	-	XC6101D645ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D646	-	XC6101D646ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D647	-	XC6101D647ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D648	-	XC6101D648ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D649	-	XC6101D649ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D650	-	XC6101D650ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
3D7	-	XC6227A37BER	LVR-IC	LDO, 3.75V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3D8	-	XC6227A38BER	LVR-IC	LDO, 3.85V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3D9	-	XC6227A39BER	LVR-IC	LDO, 3.95V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3DA	-	XC6227A40BER	LVR-IC	LDO, 4.05V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3DA01	-	XC6404DA01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA02	-	XC6404DA02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA03	-	XC6404DA03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA04	-	XC6404DA04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA05	-	XC6404DA05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA07	-	XC6404DA07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA08	-	XC6404DA08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA09	-	XC6404DA09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA10	-	XC6404DA10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA11	-	XC6404DA11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA12	-	XC6404DA12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA13	-	XC6404DA13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA14	-	XC6404DA14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA15	-	XC6404DA15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA16	-	XC6404DA16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA17	-	XC6404DA17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA18	-	XC6404DA18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA19	-	XC6404DA19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA20	-	XC6404DA20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA21	-	XC6404DA21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA22	-	XC6404DA22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA23	-	XC6404DA23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA24	-	XC6404DA24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA25	-	XC6404DA25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA26	-	XC6404DA26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA27	-	XC6404DA27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA28	-	XC6404DA28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA29	-	XC6404DA29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA30	-	XC6404DA30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA31	-	XC6404DA31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA32	-	XC6404DA32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA33	-	XC6404DA33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA34	-	XC6404DA34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA80	-	XC6404DA80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA81	-	XC6404DA81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA82	-	XC6404DA82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA83	-	XC6404DA83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA84	-	XC6404DA84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA85	-	XC6404DA85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA86	-	XC6404DA86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA87	-	XC6404DA87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DA88	-	XC6404DA88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB	-	XC6227A41BER	LVR-IC	LDO, 4.15V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3DB01	-	XC6404DB01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3DB02	-	XC6404DB02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB03	-	XC6404DB03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB04	-	XC6404DB04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB05	-	XC6404DB05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB07	-	XC6404DB07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB08	-	XC6404DB08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB09	-	XC6404DB09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB10	-	XC6404DB10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB11	-	XC6404DB11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB12	-	XC6404DB12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB13	-	XC6404DB13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB14	-	XC6404DB14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB15	-	XC6404DB15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB16	-	XC6404DB16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB17	-	XC6404DB17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB18	-	XC6404DB18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB19	-	XC6404DB19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB20	-	XC6404DB20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB21	-	XC6404DB21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB22	-	XC6404DB22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB23	-	XC6404DB23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB24	-	XC6404DB24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB25	-	XC6404DB25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB26	-	XC6404DB26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB27	-	XC6404DB27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB28	-	XC6404DB28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB29	-	XC6404DB29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB30	-	XC6404DB30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB31	-	XC6404DB31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB32	-	XC6404DB32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB33	-	XC6404DB33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB34	-	XC6404DB34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB80	-	XC6404DB80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB81	-	XC6404DB81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB82	-	XC6404DB82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB83	-	XC6404DB83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB84	-	XC6404DB84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB85	-	XC6404DB85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB86	-	XC6404DB86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB87	-	XC6404DB87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DB88	-	XC6404DB88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC	-	XC6227A42BER	LVR-IC	LDO, 4.25V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3DC01	-	XC6404DC01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC02	-	XC6404DC02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC03	-	XC6404DC03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC04	-	XC6404DC04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC05	-	XC6404DC05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC07	-	XC6404DC07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC08	-	XC6404DC08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC09	-	XC6404DC09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC10	-	XC6404DC10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC11	-	XC6404DC11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC12	-	XC6404DC12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC13	-	XC6404DC13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC14	-	XC6404DC14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC15	-	XC6404DC15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC16	-	XC6404DC16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC17	-	XC6404DC17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC18	-	XC6404DC18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC19	-	XC6404DC19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC20	-	XC6404DC20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC21	-	XC6404DC21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC22	-	XC6404DC22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC23	-	XC6404DC23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC24	-	XC6404DC24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC25	-	XC6404DC25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC26	-	XC6404DC26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC27	-	XC6404DC27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC28	-	XC6404DC28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC29	-	XC6404DC29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3DC30	-	XC6404DC30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC31	-	XC6404DC31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC32	-	XC6404DC32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC33	-	XC6404DC33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC34	-	XC6404DC34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC80	-	XC6404DC80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC81	-	XC6404DC81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC82	-	XC6404DC82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC83	-	XC6404DC83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC84	-	XC6404DC84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC85	-	XC6404DC85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC86	-	XC6404DC86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC87	-	XC6404DC87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DC88	-	XC6404DC88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD	-	XC6227A43BER	LVR-IC	LDO, 4.35V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3DD01	-	XC6404DD01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD02	-	XC6404DD02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD03	-	XC6404DD03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD04	-	XC6404DD04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD05	-	XC6404DD05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD07	-	XC6404DD07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD08	-	XC6404DD08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD09	-	XC6404DD09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD10	-	XC6404DD10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD11	-	XC6404DD11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD12	-	XC6404DD12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD13	-	XC6404DD13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD14	-	XC6404DD14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD15	-	XC6404DD15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD16	-	XC6404DD16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD17	-	XC6404DD17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD18	-	XC6404DD18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD19	-	XC6404DD19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD20	-	XC6404DD20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD21	-	XC6404DD21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD22	-	XC6404DD22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD23	-	XC6404DD23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD24	-	XC6404DD24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD25	-	XC6404DD25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD26	-	XC6404DD26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD27	-	XC6404DD27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD28	-	XC6404DD28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD29	-	XC6404DD29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD30	-	XC6404DD30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD31	-	XC6404DD31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD32	-	XC6404DD32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD33	-	XC6404DD33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD34	-	XC6404DD34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD80	-	XC6404DD80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD81	-	XC6404DD81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD82	-	XC6404DD82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD83	-	XC6404DD83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD84	-	XC6404DD84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD85	-	XC6404DD85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD86	-	XC6404DD86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD87	-	XC6404DD87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DD88	-	XC6404DD88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, +CE, PDR	USP-6B	49zx	VR15	9b	Tor
3DE	-	XC6227A44BER	LVR-IC	LDO, 4.45V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3DE01	-	XC6404DE01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE02	-	XC6404DE02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE03	-	XC6404DE03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE04	-	XC6404DE04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE05	-	XC6404DE05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE07	-	XC6404DE07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE08	-	XC6404DE08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE09	-	XC6404DE09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE10	-	XC6404DE10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE11	-	XC6404DE11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE12	-	XC6404DE12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE13	-	XC6404DE13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3DE14	-	XC6404DE14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE15	-	XC6404DE15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE16	-	XC6404DE16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE17	-	XC6404DE17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE18	-	XC6404DE18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE19	-	XC6404DE19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE20	-	XC6404DE20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE21	-	XC6404DE21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE22	-	XC6404DE22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE23	-	XC6404DE23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE24	-	XC6404DE24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE25	-	XC6404DE25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE26	-	XC6404DE26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE27	-	XC6404DE27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE28	-	XC6404DE28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE29	-	XC6404DE29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE30	-	XC6404DE30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE31	-	XC6404DE31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE32	-	XC6404DE32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE33	-	XC6404DE33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE34	-	XC6404DE34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE80	-	XC6404DE80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE81	-	XC6404DE81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE82	-	XC6404DE82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE83	-	XC6404DE83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE84	-	XC6404DE84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE85	-	XC6404DE85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE86	-	XC6404DE86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE87	-	XC6404DE87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DE88	-	XC6404DE88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF	-	XC6227A45BER	LVR-IC	LDO, 4.55V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3DF01	-	XC6404DF01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF02	-	XC6404DF02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF03	-	XC6404DF03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF04	-	XC6404DF04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF05	-	XC6404DF05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF07	-	XC6404DF07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF08	-	XC6404DF08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF09	-	XC6404DF09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF10	-	XC6404DF10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF11	-	XC6404DF11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF12	-	XC6404DF12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF13	-	XC6404DF13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF14	-	XC6404DF14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF15	-	XC6404DF15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF16	-	XC6404DF16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF17	-	XC6404DF17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF18	-	XC6404DF18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF19	-	XC6404DF19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF20	-	XC6404DF20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF21	-	XC6404DF21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF22	-	XC6404DF22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF23	-	XC6404DF23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF24	-	XC6404DF24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF25	-	XC6404DF25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF26	-	XC6404DF26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF27	-	XC6404DF27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF28	-	XC6404DF28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF29	-	XC6404DF29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF30	-	XC6404DF30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF31	-	XC6404DF31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF32	-	XC6404DF32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF33	-	XC6404DF33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF34	-	XC6404DF34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF80	-	XC6404DF80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF81	-	XC6404DF81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF82	-	XC6404DF82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF83	-	XC6404DF83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF84	-	XC6404DF84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF85	-	XC6404DF85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3DF86	-	XC6404DF86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF87	-	XC6404DF87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DF88	-	XC6404DF88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH	-	XC6227A46BER	LVR-IC	LDO, 4.65V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3DH01	-	XC6404DH01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH02	-	XC6404DH02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH03	-	XC6404DH03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH04	-	XC6404DH04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH05	-	XC6404DH05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH07	-	XC6404DH07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH08	-	XC6404DH08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH09	-	XC6404DH09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH10	-	XC6404DH10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH11	-	XC6404DH11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH12	-	XC6404DH12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH13	-	XC6404DH13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH14	-	XC6404DH14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH15	-	XC6404DH15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH16	-	XC6404DH16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH17	-	XC6404DH17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH18	-	XC6404DH18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH19	-	XC6404DH19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH20	-	XC6404DH20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH21	-	XC6404DH21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH22	-	XC6404DH22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH23	-	XC6404DH23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH24	-	XC6404DH24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH25	-	XC6404DH25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH26	-	XC6404DH26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH27	-	XC6404DH27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH28	-	XC6404DH28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH29	-	XC6404DH29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH30	-	XC6404DH30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH31	-	XC6404DH31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH32	-	XC6404DH32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH33	-	XC6404DH33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH34	-	XC6404DH34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH80	-	XC6404DH80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH81	-	XC6404DH81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH82	-	XC6404DH82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH83	-	XC6404DH83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH84	-	XC6404DH84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH85	-	XC6404DH85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH86	-	XC6404DH86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH87	-	XC6404DH87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DH88	-	XC6404DH88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK	-	XC6227A47BER	LVR-IC	LDO, 4.75V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3DK01	-	XC6404DK01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK02	-	XC6404DK02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK03	-	XC6404DK03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK04	-	XC6404DK04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK05	-	XC6404DK05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK07	-	XC6404DK07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK08	-	XC6404DK08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK09	-	XC6404DK09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK10	-	XC6404DK10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK11	-	XC6404DK11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK12	-	XC6404DK12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK13	-	XC6404DK13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK14	-	XC6404DK14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK15	-	XC6404DK15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK16	-	XC6404DK16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK17	-	XC6404DK17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK18	-	XC6404DK18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK19	-	XC6404DK19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK20	-	XC6404DK20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK21	-	XC6404DK21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK22	-	XC6404DK22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK23	-	XC6404DK23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK24	-	XC6404DK24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3DK25	-	XC6404DK25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK26	-	XC6404DK26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK27	-	XC6404DK27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK28	-	XC6404DK28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK29	-	XC6404DK29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK30	-	XC6404DK30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK31	-	XC6404DK31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK32	-	XC6404DK32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK33D	-	XC6404DK33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK34	-	XC6404DK34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK80	-	XC6404DK80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK81	-	XC6404DK81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK82	-	XC6404DK82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK83D	-	XC6404DK83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK84	-	XC6404DK84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK85	-	XC6404DK85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK86	-	XC6404DK86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK87	-	XC6404DK87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DK88	-	XC6404DK88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, +CE	USP-6B	49zx	VR15	9b	Tor
3DL	-	XC6227A48BER	LVR-IC	LDO, 4.85V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3DL01	-	XC6404DL01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL02	-	XC6404DL02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL03D	-	XC6404DL03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL04	-	XC6404DL04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL05	-	XC6404DL05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL07	-	XC6404DL07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL08	-	XC6404DL08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL09	-	XC6404DL09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL10	-	XC6404DL10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL11	-	XC6404DL11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL12	-	XC6404DL12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL13D	-	XC6404DL13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL14	-	XC6404DL14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL15	-	XC6404DL15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL16	-	XC6404DL16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL17	-	XC6404DL17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL18	-	XC6404DL18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL19	-	XC6404DL19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL20	-	XC6404DL20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL21	-	XC6404DL21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL22	-	XC6404DL22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL23D	-	XC6404DL23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL24	-	XC6404DL24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL25	-	XC6404DL25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL26	-	XC6404DL26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL27	-	XC6404DL27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL28	-	XC6404DL28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL29	-	XC6404DL29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL30	-	XC6404DL30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL31	-	XC6404DL31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL32	-	XC6404DL32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL33D	-	XC6404DL33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL34	-	XC6404DL34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL80	-	XC6404DL80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL81	-	XC6404DL81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL82	-	XC6404DL82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL83D	-	XC6404DL83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL84	-	XC6404DL84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL85	-	XC6404DL85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL86	-	XC6404DL86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL87	-	XC6404DL87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DL88	-	XC6404DL88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM	-	XC6227A49BER	LVR-IC	LDO, 4.95V±1%, 700mA, +CE	USP-6C	49hq	VR4	9a	Tor
3DM01	-	XC6404DM01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM02	-	XC6404DM02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM03D	-	XC6404DM03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM04	-	XC6404DM04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM05	-	XC6404DM05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM07	-	XC6404DM07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM08	-	XC6404DM08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3DM09	-	XC6404DM09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM10	-	XC6404DM10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM11	-	XC6404DM11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM12	-	XC6404DM12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM13	-	XC6404DM13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM14	-	XC6404DM14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM15	-	XC6404DM15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM16	-	XC6404DM16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM17	-	XC6404DM17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM18	-	XC6404DM18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM19	-	XC6404DM19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM20	-	XC6404DM20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM21	-	XC6404DM21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM22	-	XC6404DM22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM23	-	XC6404DM23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM24	-	XC6404DM24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM25	-	XC6404DM25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM26	-	XC6404DM26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM27	-	XC6404DM27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM28	-	XC6404DM28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM29	-	XC6404DM29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM30	-	XC6404DM30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM31	-	XC6404DM31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM32	-	XC6404DM32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM33	-	XC6404DM33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM34	-	XC6404DM34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM80	-	XC6404DM80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM81	-	XC6404DM81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM82	-	XC6404DM82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM83	-	XC6404DM83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM84	-	XC6404DM84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM85	-	XC6404DM85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM86	-	XC6404DM86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM87	-	XC6404DM87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DM88	-	XC6404DM88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN01	-	XC6404DN01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN02	-	XC6404DN02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN03	-	XC6404DN03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN04	-	XC6404DN04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN05	-	XC6404DN05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN07	-	XC6404DN07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN08	-	XC6404DN08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN09	-	XC6404DN09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN10	-	XC6404DN10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN11	-	XC6404DN11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN12	-	XC6404DN12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN13	-	XC6404DN13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN14	-	XC6404DN14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN15	-	XC6404DN15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN16	-	XC6404DN16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN17	-	XC6404DN17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN18	-	XC6404DN18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN19	-	XC6404DN19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN20	-	XC6404DN20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN21	-	XC6404DN21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN22	-	XC6404DN22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN23	-	XC6404DN23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN24	-	XC6404DN24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN25	-	XC6404DN25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN26	-	XC6404DN26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN27	-	XC6404DN27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN28	-	XC6404DN28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN29	-	XC6404DN29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN30	-	XC6404DN30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN31	-	XC6404DN31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN32	-	XC6404DN32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN33	-	XC6404DN33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN34	-	XC6404DN34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN80	-	XC6404DN80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN81	-	XC6404DN81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3DN82	-	XC6404DN82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN83	-	XC6404DN83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN84	-	XC6404DN84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN85	-	XC6404DN85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN86	-	XC6404DN86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN87	-	XC6404DN87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DN88	-	XC6404DN88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP01	-	XC6404DP01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP02	-	XC6404DP02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP03	-	XC6404DP03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP04	-	XC6404DP04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP05	-	XC6404DP05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP07	-	XC6404DP07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP08	-	XC6404DP08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP09	-	XC6404DP09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP10	-	XC6404DP10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP11	-	XC6404DP11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP12	-	XC6404DP12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP13	-	XC6404DP13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP14	-	XC6404DP14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP15	-	XC6404DP15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP16	-	XC6404DP16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP17	-	XC6404DP17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP18	-	XC6404DP18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP19	-	XC6404DP19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP20	-	XC6404DP20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP21	-	XC6404DP21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP22	-	XC6404DP22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP23	-	XC6404DP23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP24	-	XC6404DP24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP25	-	XC6404DP25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP26	-	XC6404DP26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP27	-	XC6404DP27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP28	-	XC6404DP28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP29	-	XC6404DP29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP30	-	XC6404DP30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP31	-	XC6404DP31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP32	-	XC6404DP32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP33	-	XC6404DP33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP34	-	XC6404DP34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP80	-	XC6404DP80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP81	-	XC6404DP81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP82	-	XC6404DP82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP83	-	XC6404DP83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP84	-	XC6404DP84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP85	-	XC6404DP85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP86	-	XC6404DP86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP87	-	XC6404DP87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DP88	-	XC6404DP88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, -CE, PUR	USP-6B	49zx	VR15	9b	Tor
3DR01	-	XC6404DR01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR02	-	XC6404DR02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR03	-	XC6404DR03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR04	-	XC6404DR04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR05	-	XC6404DR05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR07	-	XC6404DR07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR08	-	XC6404DR08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR09	-	XC6404DR09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR10	-	XC6404DR10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR11	-	XC6404DR11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR12	-	XC6404DR12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR13	-	XC6404DR13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR14	-	XC6404DR14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR15	-	XC6404DR15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR16	-	XC6404DR16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR17	-	XC6404DR17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR18	-	XC6404DR18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR19	-	XC6404DR19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR20	-	XC6404DR20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR21	-	XC6404DR21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR22	-	XC6404DR22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3DR23	-	XC6404DR23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR24	-	XC6404DR24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR25	-	XC6404DR25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR26	-	XC6404DR26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR27	-	XC6404DR27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR28	-	XC6404DR28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR29	-	XC6404DR29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR30	-	XC6404DR30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR31	-	XC6404DR31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR32	-	XC6404DR32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR33	-	XC6404DR33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR34	-	XC6404DR34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR80	-	XC6404DR80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR81	-	XC6404DR81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR82	-	XC6404DR82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR83	-	XC6404DR83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR84	-	XC6404DR84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR85	-	XC6404DR85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR86	-	XC6404DR86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR87	-	XC6404DR87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DR88	-	XC6404DR88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS01	-	XC6404DS01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS02	-	XC6404DS02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS03	-	XC6404DS03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS04	-	XC6404DS04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS05	-	XC6404DS05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS07	-	XC6404DS07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS08	-	XC6404DS08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS09	-	XC6404DS09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS10	-	XC6404DS10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS11	-	XC6404DS11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS12	-	XC6404DS12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS13	-	XC6404DS13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS14	-	XC6404DS14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS15	-	XC6404DS15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS16	-	XC6404DS16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS17	-	XC6404DS17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS18	-	XC6404DS18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS19	-	XC6404DS19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS20	-	XC6404DS20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS21	-	XC6404DS21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS22	-	XC6404DS22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS23	-	XC6404DS23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS24	-	XC6404DS24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS25	-	XC6404DS25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS26	-	XC6404DS26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS27	-	XC6404DS27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS28	-	XC6404DS28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS29	-	XC6404DS29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS30	-	XC6404DS30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS31	-	XC6404DS31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS32	-	XC6404DS32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS33	-	XC6404DS33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS34	-	XC6404DS34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS80	-	XC6404DS80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS81	-	XC6404DS81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS82	-	XC6404DS82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS83	-	XC6404DS83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS84	-	XC6404DS84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS85	-	XC6404DS85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS86	-	XC6404DS86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS87	-	XC6404DS87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DS88	-	XC6404DS88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT01	-	XC6404DT01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT02	-	XC6404DT02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT03	-	XC6404DT03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT04	-	XC6404DT04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT05	-	XC6404DT05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT07	-	XC6404DT07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT08	-	XC6404DT08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3DT09	-	XC6404DT09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT10	-	XC6404DT10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT11	-	XC6404DT11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT12	-	XC6404DT12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT13	-	XC6404DT13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT14	-	XC6404DT14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT15	-	XC6404DT15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT16	-	XC6404DT16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT17	-	XC6404DT17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT18	-	XC6404DT18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT19	-	XC6404DT19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT20	-	XC6404DT20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT21	-	XC6404DT21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT22	-	XC6404DT22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT23	-	XC6404DT23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT24	-	XC6404DT24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT25	-	XC6404DT25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT26	-	XC6404DT26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT27	-	XC6404DT27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT28	-	XC6404DT28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT29	-	XC6404DT29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT30	-	XC6404DT30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT31	-	XC6404DT31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT32	-	XC6404DT32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT33	-	XC6404DT33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT34	-	XC6404DT34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT80	-	XC6404DT80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT81	-	XC6404DT81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT82	-	XC6404DT82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT83	-	XC6404DT83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT84	-	XC6404DT84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT85	-	XC6404DT85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT86	-	XC6404DT86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT87	-	XC6404DT87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DT88	-	XC6404DT88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU01	-	XC6404DU01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU02	-	XC6404DU02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU03	-	XC6404DU03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU04	-	XC6404DU04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU05	-	XC6404DU05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU07	-	XC6404DU07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU08	-	XC6404DU08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU09	-	XC6404DU09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU10	-	XC6404DU10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU11	-	XC6404DU11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU12	-	XC6404DU12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU13	-	XC6404DU13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU14	-	XC6404DU14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU15	-	XC6404DU15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU16	-	XC6404DU16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU17	-	XC6404DU17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU18	-	XC6404DU18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU19	-	XC6404DU19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU20	-	XC6404DU20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU21	-	XC6404DU21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU22	-	XC6404DU22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU23	-	XC6404DU23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU24	-	XC6404DU24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU25	-	XC6404DU25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU26	-	XC6404DU26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU27	-	XC6404DU27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU28	-	XC6404DU28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU29	-	XC6404DU29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU30	-	XC6404DU30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU31	-	XC6404DU31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU32	-	XC6404DU32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU33	-	XC6404DU33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU34	-	XC6404DU34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU80	-	XC6404DU80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU81	-	XC6404DU81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor






SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3DU82	-	XC6404DU82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU83	-	XC6404DU83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU84	-	XC6404DU84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU85	-	XC6404DU85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU86	-	XC6404DU86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU87	-	XC6404DU87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3DU88	-	XC6404DU88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, -CE	USP-6B	49zx	VR15	9b	Tor
3E	-	R3117K111C	Vdet-IC	1.1V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3E	-	RP101K181B5	LVR-IC	LDO, LN, 1.85V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3E	-	RP112K151D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3E	-	RP173K151B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3E	-	XC6217D1527R-G	LVR-IC	LDO, 1.5V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3E	-	XC6223D2419R-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3E	-	XC6224B22B7R	LVR-IC	LDO, 2.25V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
3E	-	XC6229H33B1R-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3E016	-	XC6106E016ER	Vdet-IC	1.6V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E017	-	XC6106E017ER	Vdet-IC	1.7V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E018	-	XC6106E018ER	Vdet-IC	1.8V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E019	-	XC6106E019ER	Vdet-IC	1.9V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E020	-	XC6106E020ER	Vdet-IC	2.0V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E021	-	XC6106E021ER	Vdet-IC	2.1V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E022	-	XC6106E022ER	Vdet-IC	2.2V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E023	-	XC6106E023ER	Vdet-IC	2.3V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E024	-	XC6106E024ER	Vdet-IC	2.4V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E025	-	XC6106E025ER	Vdet-IC	2.5V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E026	-	XC6106E026ER	Vdet-IC	2.6V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E027	-	XC6106E027ER	Vdet-IC	2.7V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E028	-	XC6106E028ER	Vdet-IC	2.8V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E029	-	XC6106E029ER	Vdet-IC	2.9V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E030	-	XC6106E030ER	Vdet-IC	3.0V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E031	-	XC6106E031ER	Vdet-IC	3.1V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E032	-	XC6106E032ER	Vdet-IC	3.2V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E033	-	XC6106E033ER	Vdet-IC	3.3V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E034	-	XC6106E034ER	Vdet-IC	3.4V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E035	-	XC6106E035ER	Vdet-IC	3.5V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E036	-	XC6106E036ER	Vdet-IC	3.6V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E037	-	XC6106E037ER	Vdet-IC	3.7V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E038	-	XC6106E038ER	Vdet-IC	3.8V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E039	-	XC6106E039ER	Vdet-IC	3.9V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E040	-	XC6106E040ER	Vdet-IC	4.0V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E041	-	XC6106E041ER	Vdet-IC	4.1V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E042	-	XC6106E042ER	Vdet-IC	4.2V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E043	-	XC6106E043ER	Vdet-IC	4.3V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E044	-	XC6106E044ER	Vdet-IC	4.4V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E045	-	XC6106E045ER	Vdet-IC	4.5V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E046	-	XC6106E046ER	Vdet-IC	4.6V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E047	-	XC6106E047ER	Vdet-IC	4.7V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E048	-	XC6106E048ER	Vdet-IC	4.8V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E049	-	XC6106E049ER	Vdet-IC	4.9V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E050	-	XC6106E050ER	Vdet-IC	5.0V±2%, Hst, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
3E416	-	XC6101E416ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E417	-	XC6101E417ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E418	-	XC6101E418ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E419	-	XC6101E419ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E420	-	XC6101E420ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E421	-	XC6101E421ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E422	-	XC6101E422ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E423	-	XC6101E423ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E424	-	XC6101E424ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E425	-	XC6101E425ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E426	-	XC6101E426ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E427	-	XC6101E427ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E428	-	XC6101E428ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E429	-	XC6101E429ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E430	-	XC6101E430ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E431	-	XC6101E431ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E432	-	XC6101E432ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E433	-	XC6101E433ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E434	-	XC6101E434ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E435	-	XC6101E435ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3E436	-	XC6101E436ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E437	-	XC6101E437ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E438	-	XC6101E438ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E439	-	XC6101E439ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E440	-	XC6101E440ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E441	-	XC6101E441ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E442	-	XC6101E442ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E443	-	XC6101E443ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E444	-	XC6101E444ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E445	-	XC6101E445ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E446	-	XC6101E446ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E447	-	XC6101E447ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E448	-	XC6101E448ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E449	-	XC6101E449ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E450	-	XC6101E450ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E516	-	XC6101E516ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E517	-	XC6101E517ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E518	-	XC6101E518ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E519	-	XC6101E519ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E520	-	XC6101E520ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E521	-	XC6101E521ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E522	-	XC6101E522ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E523	-	XC6101E523ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E524	-	XC6101E524ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E525	-	XC6101E525ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E526	-	XC6101E526ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E527	-	XC6101E527ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E528	-	XC6101E528ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E529	-	XC6101E529ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E530	-	XC6101E530ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E531	-	XC6101E531ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E532	-	XC6101E532ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E533	-	XC6101E533ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E534	-	XC6101E534ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E535	-	XC6101E535ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E536	-	XC6101E536ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E537	-	XC6101E537ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E538	-	XC6101E538ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E539	-	XC6101E539ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E540	-	XC6101E540ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E541	-	XC6101E541ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E542	-	XC6101E542ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E543	-	XC6101E543ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E544	-	XC6101E544ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E545	-	XC6101E545ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E546	-	XC6101E546ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E547	-	XC6101E547ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E548	-	XC6101E548ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E549	-	XC6101E549ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E550	-	XC6101E550ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E616	-	XC6101E616ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E617	-	XC6101E617ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E618	-	XC6101E618ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E619	-	XC6101E619ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E620	-	XC6101E620ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E621	-	XC6101E621ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E622	-	XC6101E622ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E623	-	XC6101E623ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E624	-	XC6101E624ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E625	-	XC6101E625ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E626	-	XC6101E626ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E627	-	XC6101E627ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E628	-	XC6101E628ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E629	-	XC6101E629ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E630	-	XC6101E630ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E631	-	XC6101E631ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E632	-	XC6101E632ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E633	-	XC6101E633ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E634	-	XC6101E634ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E635	-	XC6101E635ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3E636	-	XC6101E636ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E637	-	XC6101E637ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E638	-	XC6101E638ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E639	-	XC6101E639ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E640	-	XC6101E640ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E641	-	XC6101E641ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E642	-	XC6101E642ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E643	-	XC6101E643ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E644	-	XC6101E644ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E645	-	XC6101E645ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E646	-	XC6101E646ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E647	-	XC6101E647ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E648	-	XC6101E648ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E649	-	XC6101E649ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E650	-	XC6101E650ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
3E7	-	XC6221A08BGR	LVR-IC	LDO, 0.85V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3E8	-	XC6221A09BGR	LVR-IC	LDO, 0.95V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3E8	-	XC6227C081ER	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3E9	-	XC6221A10BGR	LVR-IC	LDO, 1.05V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3E9	-	XC6227C091ER	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EA	-	XC6221A11BGR	LVR-IC	LDO, 1.15V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3EA	-	XC6227C101ER	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EB	-	XC6221A12BGR	LVR-IC	LDO, 1.25V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3EB	-	XC6227C111ER	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EC	-	XC6221A13BGR	LVR-IC	LDO, 1.35V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3EC	-	XC6227C121ER	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3ED	-	XC6221A14BGR	LVR-IC	LDO, 1.45V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3ED	-	XC6227C131ER	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EE	-	XC6221A15BGR	LVR-IC	LDO, 1.55V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3EE	-	XC6227C141ER	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EF	-	XC6221A16BGR	LVR-IC	LDO, 1.65V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3EF	-	XC6227C151ER	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EH	-	XC6221A17BGR	LVR-IC	LDO, 1.75V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3EH	-	XC6227C161ER	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EK	-	XC6221A18BGR	LVR-IC	LDO, 1.85V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3EK	-	XC6227C171ER	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EL	-	XC6221A19BGR	LVR-IC	LDO, 1.95V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3EL	-	XC6227C181ER	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EM	-	XC6221A20BGR	LVR-IC	LDO, 2.05V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3EM	-	XC6227C191ER	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EN	-	XC6221A21BGR	LVR-IC	LDO, 2.15V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3EN	-	XC6227C201ER	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EP	-	XC6221A22BGR	LVR-IC	LDO, 2.25V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3EP	-	XC6227C211ER	LVR-IC	LDO, 2.1V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3ER	-	XC6221A23BGR	LVR-IC	LDO, 2.35V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3ER	-	XC6227C221ER	LVR-IC	LDO, 2.2V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3ES	-	XC6221A24BGR	LVR-IC	LDO, 2.45V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3ES	-	XC6227C231ER	LVR-IC	LDO, 2.3V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3ET	-	XC6221A25BGR	LVR-IC	LDO, 2.55V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3ET	-	XC6227C241ER	LVR-IC	LDO, 2.4V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EU	-	XC6221A26BGR	LVR-IC	LDO, 2.65V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3EU	-	XC6227C251ER	LVR-IC	LDO, 2.5V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EV	-	XC6221A27BGR	LVR-IC	LDO, 2.75V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3EV	-	XC6227C261ER	LVR-IC	LDO, 2.6V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EV01	-	XC6404EV01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV02	-	XC6404EV02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV03	-	XC6404EV03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV04	-	XC6404EV04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV05	-	XC6404EV05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV07	-	XC6404EV07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV08	-	XC6404EV08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV09	-	XC6404EV09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV10	-	XC6404EV10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV11	-	XC6404EV11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV12	-	XC6404EV12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV13	-	XC6404EV13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV14	-	XC6404EV14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV15	-	XC6404EV15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV16	-	XC6404EV16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV17	-	XC6404EV17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3EV18	-	XC6404EV18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV19	-	XC6404EV19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV20	-	XC6404EV20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV21	-	XC6404EV21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV22	-	XC6404EV22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV23	-	XC6404EV23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV24	-	XC6404EV24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV25	-	XC6404EV25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV26	-	XC6404EV26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV27	-	XC6404EV27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV28	-	XC6404EV28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV29	-	XC6404EV29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV30	-	XC6404EV30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV31	-	XC6404EV31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV32	-	XC6404EV32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV33	-	XC6404EV33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV34	-	XC6404EV34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV80	-	XC6404EV80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV81	-	XC6404EV81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV82	-	XC6404EV82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV83	-	XC6404EV83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV84	-	XC6404EV84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV85	-	XC6404EV85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV86	-	XC6404EV86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV87	-	XC6404EV87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EV88	-	XC6404EV88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX	-	XC6221A28BGR	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3EX	-	XC6227C271ER	LVR-IC	LDO, 2.7V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EX01	-	XC6404EX01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX02	-	XC6404EX02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX03	-	XC6404EX03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX04	-	XC6404EX04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX05	-	XC6404EX05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX07	-	XC6404EX07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX08	-	XC6404EX08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX09	-	XC6404EX09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX10	-	XC6404EX10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX11	-	XC6404EX11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX12	-	XC6404EX12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX13	-	XC6404EX13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX14	-	XC6404EX14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX15	-	XC6404EX15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX16	-	XC6404EX16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX17	-	XC6404EX17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX18	-	XC6404EX18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX19	-	XC6404EX19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX20	-	XC6404EX20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX21	-	XC6404EX21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX22	-	XC6404EX22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX23	-	XC6404EX23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX24	-	XC6404EX24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX25	-	XC6404EX25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX26	-	XC6404EX26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX27	-	XC6404EX27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX28	-	XC6404EX28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX29	-	XC6404EX29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX30	-	XC6404EX30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX31	-	XC6404EX31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX32	-	XC6404EX32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX33	-	XC6404EX33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX34	-	XC6404EX34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX80	-	XC6404EX80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX81	-	XC6404EX81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX82	-	XC6404EX82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX83	-	XC6404EX83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX84	-	XC6404EX84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX85	-	XC6404EX85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX86	-	XC6404EX86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX87	-	XC6404EX87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor
3EX88	-	XC6404EX88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO, Vdet/Sense	USP-6B	49zy	VR14	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3EY	-	XC6221A29BGR	LVR-IC	LDO, 2.95V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3EY	-	XC6227C281ER	LVR-IC	LDO, 2.8V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EY01	-	XC6404EY01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY02	-	XC6404EY02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY03	-	XC6404EY03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY04	-	XC6404EY04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY05	-	XC6404EY05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY07	-	XC6404EY07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY08	-	XC6404EY08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY09	-	XC6404EY09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY10	-	XC6404EY10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY11	-	XC6404EY11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY12	-	XC6404EY12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY13	-	XC6404EY13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY14	-	XC6404EY14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY15	-	XC6404EY15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY16	-	XC6404EY16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY17	-	XC6404EY17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY18	-	XC6404EY18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY19	-	XC6404EY19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY20	-	XC6404EY20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY21	-	XC6404EY21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY22	-	XC6404EY22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY23	-	XC6404EY23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY24	-	XC6404EY24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY25	-	XC6404EY25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY26	-	XC6404EY26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY27	-	XC6404EY27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY28	-	XC6404EY28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY29	-	XC6404EY29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY30	-	XC6404EY30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY31	-	XC6404EY31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY32	-	XC6404EY32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY33	-	XC6404EY33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY34	-	XC6404EY34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY80	-	XC6404EY80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY81	-	XC6404EY81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY82	-	XC6404EY82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY83	-	XC6404EY83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY84	-	XC6404EY84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY85	-	XC6404EY85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY86	-	XC6404EY86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY87	-	XC6404EY87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EY88	-	XC6404EY88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ	-	XC6221A30BGR	LVR-IC	LDO, 3.05V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3EZ	-	XC6227C291ER	LVR-IC	LDO, 2.9V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3EZ01	-	XC6404EZ01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ02	-	XC6404EZ02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ03	-	XC6404EZ03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ04	-	XC6404EZ04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ05	-	XC6404EZ05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ07	-	XC6404EZ07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ08	-	XC6404EZ08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ09	-	XC6404EZ09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ10	-	XC6404EZ10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ11	-	XC6404EZ11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ12	-	XC6404EZ12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ13	-	XC6404EZ13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ14	-	XC6404EZ14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ15	-	XC6404EZ15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ16	-	XC6404EZ16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ17	-	XC6404EZ17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ18	-	XC6404EZ18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ19	-	XC6404EZ19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ20	-	XC6404EZ20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ21	-	XC6404EZ21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ22	-	XC6404EZ22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ23	-	XC6404EZ23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ24	-	XC6404EZ24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ25	-	XC6404EZ25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3EZ26	-	XC6404EZ26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ27	-	XC6404EZ27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ28	-	XC6404EZ28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ29	-	XC6404EZ29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ30	-	XC6404EZ30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ31	-	XC6404EZ31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ32	-	XC6404EZ32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ33	-	XC6404EZ33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ34	-	XC6404EZ34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ80	-	XC6404EZ80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ81	-	XC6404EZ81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ82	-	XC6404EZ82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ83	-	XC6404EZ83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ84	-	XC6404EZ84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ85	-	XC6404EZ85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ86	-	XC6404EZ86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ87	-	XC6404EZ87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3EZ88	-	XC6404EZ88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO, Vr/Sense	USP-6B	49zy	VR14	9b	Tor
3F	-	R3117K121C	Vdet-IC	1.2V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3F	-	RP101K191B	LVR-IC	LDO, LN, 1.9V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3F	-	RP112K161D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3F	-	RP173K161B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3F	-	XC6217D1627R-G	LVR-IC	LDO, 1.6V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3F	-	XC6223D2519R-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3F	-	XC6224B23B7R	LVR-IC	LDO, 2.25V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
3F	-	XC6229H3411R-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3F016	-	XC6106F016ER	Vdet-IC	1.6V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F017	-	XC6106F017ER	Vdet-IC	1.7V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F018	-	XC6106F018ER	Vdet-IC	1.8V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F019	-	XC6106F019ER	Vdet-IC	1.9V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F020	-	XC6106F020ER	Vdet-IC	2.0V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F021	-	XC6106F021ER	Vdet-IC	2.1V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F022	-	XC6106F022ER	Vdet-IC	2.2V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F023	-	XC6106F023ER	Vdet-IC	2.3V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F024	-	XC6106F024ER	Vdet-IC	2.4V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F025	-	XC6106F025ER	Vdet-IC	2.5V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F026	-	XC6106F026ER	Vdet-IC	2.6V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F027	-	XC6106F027ER	Vdet-IC	2.7V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F028	-	XC6106F028ER	Vdet-IC	2.8V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F029	-	XC6106F029ER	Vdet-IC	2.9V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F030	-	XC6106F030ER	Vdet-IC	3.0V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F031	-	XC6106F031ER	Vdet-IC	3.1V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F032	-	XC6106F032ER	Vdet-IC	3.2V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F033	-	XC6106F033ER	Vdet-IC	3.3V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F034	-	XC6106F034ER	Vdet-IC	3.4V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F035	-	XC6106F035ER	Vdet-IC	3.5V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F036	-	XC6106F036ER	Vdet-IC	3.6V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F037	-	XC6106F037ER	Vdet-IC	3.7V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F038	-	XC6106F038ER	Vdet-IC	3.8V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F039	-	XC6106F039ER	Vdet-IC	3.9V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F040	-	XC6106F040ER	Vdet-IC	4.0V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F041	-	XC6106F041ER	Vdet-IC	4.1V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F042	-	XC6106F042ER	Vdet-IC	4.2V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F043	-	XC6106F043ER	Vdet-IC	4.3V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F044	-	XC6106F044ER	Vdet-IC	4.4V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F045	-	XC6106F045ER	Vdet-IC	4.5V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F046	-	XC6106F046ER	Vdet-IC	4.6V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F047	-	XC6106F047ER	Vdet-IC	4.7V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F048	-	XC6106F048ER	Vdet-IC	4.8V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F049	-	XC6106F049ER	Vdet-IC	4.9V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F050	-	XC6106F050ER	Vdet-IC	5.0V±2%, Hst, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
3F516	-	XC6101F516ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F517	-	XC6101F517ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F518	-	XC6101F518ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F519	-	XC6101F519ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F520	-	XC6101F520ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F521	-	XC6101F521ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F522	-	XC6101F522ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F523	-	XC6101F523ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F524	-	XC6101F524ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3F525	-	XC6101F525ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F526	-	XC6101F526ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F527	-	XC6101F527ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F528	-	XC6101F528ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F529	-	XC6101F529ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F530	-	XC6101F530ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F531	-	XC6101F531ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F532	-	XC6101F532ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F533	-	XC6101F533ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F534	-	XC6101F534ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F535	-	XC6101F535ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F536	-	XC6101F536ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F537	-	XC6101F537ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F538	-	XC6101F538ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F539	-	XC6101F539ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F540	-	XC6101F540ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F541	-	XC6101F541ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F542	-	XC6101F542ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F543	-	XC6101F543ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F544	-	XC6101F544ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F545	-	XC6101F545ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F546	-	XC6101F546ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F547	-	XC6101F547ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F548	-	XC6101F548ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F549	-	XC6101F549ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F550	-	XC6101F550ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F616	-	XC6101F616ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F617	-	XC6101F617ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F618	-	XC6101F618ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F619	-	XC6101F619ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F620	-	XC6101F620ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F621	-	XC6101F621ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F622	-	XC6101F622ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F623	-	XC6101F623ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F624	-	XC6101F624ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F625	-	XC6101F625ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F626	-	XC6101F626ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F627	-	XC6101F627ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F628	-	XC6101F628ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F629	-	XC6101F629ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F630	-	XC6101F630ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F631	-	XC6101F631ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F632	-	XC6101F632ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F633	-	XC6101F633ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F634	-	XC6101F634ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F635	-	XC6101F635ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F636	-	XC6101F636ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F637	-	XC6101F637ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F638	-	XC6101F638ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F639	-	XC6101F639ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F640	-	XC6101F640ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F641	-	XC6101F641ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F642	-	XC6101F642ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F643	-	XC6101F643ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F644	-	XC6101F644ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F645	-	XC6101F645ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F646	-	XC6101F646ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F647	-	XC6101F647ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F648	-	XC6101F648ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F649	-	XC6101F649ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F650	-	XC6101F650ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
3F7	-	XC6221B08BGR	LVR-IC	LDO, 0.85V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3F8	-	XC6221B09BGR	LVR-IC	LDO, 0.95V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3F8	-	XC6227C08BER	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3F9	-	XC6221B10BGR	LVR-IC	LDO, 1.05V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3F9	-	XC6227C09BER	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FA	-	XC6221B11BGR	LVR-IC	LDO, 1.15V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FA	-	XC6227C10BER	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FB	-	XC6221B12BGR	LVR-IC	LDO, 1.25V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FB	-	XC6227C11BER	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3FC	-	XC6221B13BGR	LVR-IC	LDO, 1.35V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FC	-	XC6227C12BER	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FD	-	XC6221B14BGR	LVR-IC	LDO, 1.45V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FD	-	XC6227C13BER	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FE	-	XC6221B15BGR	LVR-IC	LDO, 1.55V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FE	-	XC6227C14BER	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FF	-	XC6221B16BGR	LVR-IC	LDO, 1.65V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FF	-	XC6227C15BER	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FH	-	XC6221B17BGR	LVR-IC	LDO, 1.75V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FH	-	XC6227C16BER	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FK	-	XC6221B18BGR	LVR-IC	LDO, 1.85V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FK	-	XC6227C17BER	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FL	-	XC6221B19BGR	LVR-IC	LDO, 1.95V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FL	-	XC6227C18BER	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FM	-	XC6221B20BGR	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FM	-	XC6227C19BER	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FN	-	XC6221B21BGR	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FN	-	XC6227C20BER	LVR-IC	LDO, 2.05V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FP	-	XC6221B22BGR	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FP	-	XC6227C21BER	LVR-IC	LDO, 2.15V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FR	-	XC6221B23BGR	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FR	-	XC6227C22BER	LVR-IC	LDO, 2.25V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FS	-	XC6221B24BGR	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FS	-	XC6227C23BER	LVR-IC	LDO, 2.35V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FT	-	XC6221B25BGR	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FT	-	XC6227C24BER	LVR-IC	LDO, 2.45V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FU	-	XC6221B26BGR	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FU	-	XC6227C25BER	LVR-IC	LDO, 2.55V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FV	-	XC6221B27BGR	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FV	-	XC6227C26BER	LVR-IC	LDO, 2.65V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FV01	-	XC6404FV01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV02	-	XC6404FV02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV03	-	XC6404FV03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV04	-	XC6404FV04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV05	-	XC6404FV05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV07	-	XC6404FV07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV08	-	XC6404FV08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV09	-	XC6404FV09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV10	-	XC6404FV10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV11	-	XC6404FV11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV12	-	XC6404FV12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV13	-	XC6404FV13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV14	-	XC6404FV14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV15	-	XC6404FV15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV16	-	XC6404FV16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV17	-	XC6404FV17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV18	-	XC6404FV18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV19	-	XC6404FV19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV20	-	XC6404FV20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV21	-	XC6404FV21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV22	-	XC6404FV22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV23	-	XC6404FV23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV24	-	XC6404FV24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV25	-	XC6404FV25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV26	-	XC6404FV26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV27	-	XC6404FV27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV28	-	XC6404FV28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV29	-	XC6404FV29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV30	-	XC6404FV30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV31	-	XC6404FV31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV32	-	XC6404FV32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV33	-	XC6404FV33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV34	-	XC6404FV34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV80	-	XC6404FV80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV81	-	XC6404FV81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV82	-	XC6404FV82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV83	-	XC6404FV83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV84	-	XC6404FV84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV85	-	XC6404FV85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV86	-	XC6404FV86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3FV87	-	XC6404FV87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FV88	-	XC6404FV88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX	-	XC6221B28BGR	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FX	-	XC6227C27BER	LVR-IC	LDO, 2.75V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FX01	-	XC6404FX01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX02	-	XC6404FX02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdi=4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX03	-	XC6404FX03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX04	-	XC6404FX04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.3V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX05	-	XC6404FX05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.4V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX07	-	XC6404FX07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=5.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX08	-	XC6404FX08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi= 4.3V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX09	-	XC6404FX09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=2.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX10	-	XC6404FX10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX11	-	XC6404FX11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.1V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX12	-	XC6404FX12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX13	-	XC6404FX13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX14	-	XC6404FX14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX15	-	XC6404FX15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX16	-	XC6404FX16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX17	-	XC6404FX17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX18	-	XC6404FX18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=2.7V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX19	-	XC6404FX19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=2.5V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX20	-	XC6404FX20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.9V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX21	-	XC6404FX21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=3.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX22	-	XC6404FX22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX23	-	XC6404FX23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.9V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX24	-	XC6404FX24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX25	-	XC6404FX25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX26	-	XC6404FX26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdi=4.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX27	-	XC6404FX27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=3.9V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX28	-	XC6404FX28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=3.7V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX29	-	XC6404FX29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdi=3.9V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX30	-	XC6404FX30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX31	-	XC6404FX31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.5V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX32	-	XC6404FX32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=2.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX33	-	XC6404FX33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=2.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX34	-	XC6404FX34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdi=4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX80	-	XC6404FX80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=1.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX81	-	XC6404FX81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdi=3.1V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX82	-	XC6404FX82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdi=2.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX83	-	XC6404FX83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdi=2.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX84	-	XC6404FX84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdi=3.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX85	-	XC6404FX85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=3.3V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX86	-	XC6404FX86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdi=3.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX87	-	XC6404FX87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdi=4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FX88	-	XC6404FX88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdi=4.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY	-	XC6221B29BGR	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FY	-	XC6227C28BER	LVR-IC	LDO, 2.85V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FY01	-	XC6404FY01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY02	-	XC6404FY02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY03	-	XC6404FY03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY04	-	XC6404FY04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY05	-	XC6404FY05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY07	-	XC6404FY07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY08	-	XC6404FY08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY09	-	XC6404FY09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY10	-	XC6404FY10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY11	-	XC6404FY11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY12	-	XC6404FY12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY13	-	XC6404FY13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY14	-	XC6404FY14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY15	-	XC6404FY15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY16	-	XC6404FY16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY17	-	XC6404FY17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY18	-	XC6404FY18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY19	-	XC6404FY19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY20	-	XC6404FY20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY21	-	XC6404FY21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY22	-	XC6404FY22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY23	-	XC6404FY23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3FY24	-	XC6404FY24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY25	-	XC6404FY25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY26	-	XC6404FY26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY27	-	XC6404FY27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY28	-	XC6404FY28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY29	-	XC6404FY29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY30	-	XC6404FY30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY31	-	XC6404FY31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY32	-	XC6404FY32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY33	-	XC6404FY33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY34	-	XC6404FY34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY80	-	XC6404FY80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY81	-	XC6404FY81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY82	-	XC6404FY82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY83	-	XC6404FY83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY84	-	XC6404FY84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY85	-	XC6404FY85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY86	-	XC6404FY86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY87	-	XC6404FY87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FY88	-	XC6404FY88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, -Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ	-	XC6221B30BGR	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3FZ	-	XC6227C29BER	LVR-IC	LDO, 2.95V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3FZ01	-	XC6404FZ01D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ02	-	XC6404FZ02D	LVR/Vdet-IC	LDO, 2.7V±2%, 500mA, Vdo=4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ03	-	XC6404FZ03D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ04	-	XC6404FZ04D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.3V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ05	-	XC6404FZ05D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.4V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ07	-	XC6404FZ07D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=5.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ08	-	XC6404FZ08D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo= 4.3V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ09	-	XC6404FZ09D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=2.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ10	-	XC6404FZ10D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ11	-	XC6404FZ11D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.1V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ12	-	XC6404FZ12D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ13	-	XC6404FZ13D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ14	-	XC6404FZ14D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ15	-	XC6404FZ15D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ16	-	XC6404FZ16D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ17	-	XC6404FZ17D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ18	-	XC6404FZ18D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=2.7V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ19	-	XC6404FZ19D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=2.5V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ20	-	XC6404FZ20D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.9V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ21	-	XC6404FZ21D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=3.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ22	-	XC6404FZ22D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ23	-	XC6404FZ23D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.9V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ24	-	XC6404FZ24D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ25	-	XC6404FZ25D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ26	-	XC6404FZ26D	LVR/Vdet-IC	LDO, 4.3V±2%, 500mA, Vdo=4.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ27	-	XC6404FZ27D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=3.9V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ28	-	XC6404FZ28D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=3.7V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ29	-	XC6404FZ29D	LVR/Vdet-IC	LDO, 2.6V±2%, 500mA, Vdo=3.9V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ30	-	XC6404FZ30D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ31	-	XC6404FZ31D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.5V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ32	-	XC6404FZ32D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=2.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ33	-	XC6404FZ33D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=2.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ34	-	XC6404FZ34D	LVR/Vdet-IC	LDO, 3.4V±2%, 500mA, Vdo=4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ80	-	XC6404FZ80D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=1.6V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ81	-	XC6404FZ81D	LVR/Vdet-IC	LDO, 2.8V±2%, 500mA, Vdo=3.1V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ82	-	XC6404FZ82D	LVR/Vdet-IC	LDO, 1.8V±2%, 500mA, Vdo=2.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ83	-	XC6404FZ83D	LVR/Vdet-IC	LDO, 2.5V±2%, 500mA, Vdo=2.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ84	-	XC6404FZ84D	LVR/Vdet-IC	LDO, 2.85V±2%, 500mA, Vdo=3.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ85	-	XC6404FZ85D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=3.3V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ86	-	XC6404FZ86D	LVR/Vdet-IC	LDO, 3.5V±2%, 500mA, Vdo=3.8V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ87	-	XC6404FZ87D	LVR/Vdet-IC	LDO, 3.0V±2%, 500mA, Vdo=4.2V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3FZ88	-	XC6404FZ88D	LVR/Vdet-IC	LDO, 3.3V±2%, 500mA, Vdo=4.0V, +Reset ODO	USP-6B	49zz	VR13	9b	Tor
3G	-	R3117K131C	Vdet-IC	1.3V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3G	-	RP101K201B	LVR-IC	LDO, LN, 2.0V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3G	-	RP112K171D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3G	-	RP173K171B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3GA	-	AP6233A-25NHFGU	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GA	-	AP6233A-25NHFPU	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3GA	mg	AP6233A-25NHFGU1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GA	mg	AP6233A-25NHFPU1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3GB	-	AP6233A-25NLFGU	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GB	-	AP6233A-25NLFPU	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3GB	mg	AP6233A-25NLFGU1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GB	mg	AP6233A-25NLFPU1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3GC	-	AP6233A-25NHNGU	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GC	-	AP6233A-25NHNPU	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
3GC	mg	AP6233A-25NHNGU1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GC	mg	AP6233A-25NHNPU1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
3GD	-	AP6233A-25NLNGU	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GD	-	AP6233A-25NLNPU	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
3GD	mg	AP6233A-25NLNGU1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GD	mg	AP6233A-25NLNPU1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
3GE	-	AP6233A-25UHFGU	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GE	-	AP6233A-25UHFPU	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3GE	mg	AP6233A-25UHFGU1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GE	mg	AP6233A-25UHFPU1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3GF	-	AP6233A-25ULFGU	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GF	-	AP6233A-25ULFPU	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3GF	mg	AP6233A-25ULFGU1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GF	mg	AP6233A-25ULFPU1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3GG	-	AP6233A-25UHNGU	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GG	-	AP6233A-25UHNPU	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3GG	mg	AP6233A-25UHNGU1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GG	mg	AP6233A-25UHNPU1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3GH	-	AP6233A-25ULNGU	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GH	-	AP6233A-25ULNPU	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3GH	mg	AP6233A-25ULNGU1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GH	mg	AP6233A-25ULNPU1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3GJ	-	AP6233A-25DHFGU	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GJ	-	AP6233A-25DHFPU	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3GJ	mg	AP6233A-25DHFGU1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GJ	mg	AP6233A-25DHFPU1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3GK	-	AP6233A-25DLFGU	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GK	-	AP6233A-25DLFPU	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3GK	mg	AP6233A-25DLFGU1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GK	mg	AP6233A-25DLFPU1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3GL	-	AP6233A-25DHNGU	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GL	-	AP6233A-25DHNPU	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3GL	mg	AP6233A-25DHNGU1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GL	mg	AP6233A-25DHNPU1	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3GM	-	AP6233A-25DLNGU	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GM	-	AP6233A-25DLNPU	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3GM	mg	AP6233A-25DLNGU1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3GM	mg	AP6233A-25DLNPU1	LVR-IC	LDO, 2.5V±1%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3H	-	R3117K141C	Vdet-IC	1.4V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3H	-	RP101K251B	LVR-IC	LDO, LN, 2.5V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3H	-	RP112K181D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3H	-	RP173K181B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3H	-	XC6217D1727R-G	LVR-IC	LDO, 1.7V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3H	-	XC6223D2619R-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3H	-	XC6224B24B7R	LVR-IC	LDO, 2.45V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
3H	-	XC6229H34B1R-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3H0	-	XC6227C301ER	LVR-IC	LDO, 3.0V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3H016	-	XC6106H016ER	Vdet-IC	1.6V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H017	-	XC6106H017ER	Vdet-IC	1.7V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H018	-	XC6106H018ER	Vdet-IC	1.8V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H019	-	XC6106H019ER	Vdet-IC	1.9V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H020	-	XC6106H020ER	Vdet-IC	2.0V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H021	-	XC6106H021ER	Vdet-IC	2.1V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H022	-	XC6106H022ER	Vdet-IC	2.2V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H023	-	XC6106H023ER	Vdet-IC	2.3V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H024	-	XC6106H024ER	Vdet-IC	2.4V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H025	-	XC6106H025ER	Vdet-IC	2.5V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H026	-	XC6106H026ER	Vdet-IC	2.6V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H027	-	XC6106H027ER	Vdet-IC	2.7V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H028	-	XC6106H028ER	Vdet-IC	2.8V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H029	-	XC6106H029ER	Vdet-IC	2.9V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H030	-	XC6106H030ER	Vdet-IC	3.0V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3H031	-	XC6106H031ER	Vdet-IC	3.1V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H032	-	XC6106H032ER	Vdet-IC	3.2V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H033	-	XC6106H033ER	Vdet-IC	3.3V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H034	-	XC6106H034ER	Vdet-IC	3.4V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H035	-	XC6106H035ER	Vdet-IC	3.5V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H036	-	XC6106H036ER	Vdet-IC	3.6V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H037	-	XC6106H037ER	Vdet-IC	3.7V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H038	-	XC6106H038ER	Vdet-IC	3.8V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H039	-	XC6106H039ER	Vdet-IC	3.9V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H040	-	XC6106H040ER	Vdet-IC	4.0V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H041	-	XC6106H041ER	Vdet-IC	4.1V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H042	-	XC6106H042ER	Vdet-IC	4.2V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H043	-	XC6106H043ER	Vdet-IC	4.3V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H044	-	XC6106H044ER	Vdet-IC	4.4V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H045	-	XC6106H045ER	Vdet-IC	4.5V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H046	-	XC6106H046ER	Vdet-IC	4.6V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H047	-	XC6106H047ER	Vdet-IC	4.7V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H048	-	XC6106H048ER	Vdet-IC	4.8V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H049	-	XC6106H049ER	Vdet-IC	4.9V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H050	-	XC6106H050ER	Vdet-IC	5.0V±2%, Hst, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
3H1	-	XC6227C311ER	LVR-IC	LDO, 3.1V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3H2	-	XC6227C321ER	LVR-IC	LDO, 3.2V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3H3	-	XC6227C331ER	LVR-IC	LDO, 3.3V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3H4	-	XC6227C341ER	LVR-IC	LDO, 3.4V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3H5	-	XC6227C351ER	LVR-IC	LDO, 3.5V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3H6	-	XC6227C361ER	LVR-IC	LDO, 3.6V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3H616	-	XC6101H616ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H617	-	XC6101H617ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H618	-	XC6101H618ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H619	-	XC6101H619ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H620	-	XC6101H620ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H621	-	XC6101H621ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H622	-	XC6101H622ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H623	-	XC6101H623ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H624	-	XC6101H624ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H625	-	XC6101H625ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H626	-	XC6101H626ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H627	-	XC6101H627ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H628	-	XC6101H628ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H629	-	XC6101H629ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H630	-	XC6101H630ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H631	-	XC6101H631ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H632	-	XC6101H632ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H633	-	XC6101H633ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H634	-	XC6101H634ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H635	-	XC6101H635ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H636	-	XC6101H636ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H637	-	XC6101H637ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H638	-	XC6101H638ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H639	-	XC6101H639ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H640	-	XC6101H640ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H641	-	XC6101H641ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H642	-	XC6101H642ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H643	-	XC6101H643ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H644	-	XC6101H644ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H645	-	XC6101H645ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H646	-	XC6101H646ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H647	-	XC6101H647ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H648	-	XC6101H648ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H649	-	XC6101H649ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H650	-	XC6101H650ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
3H7	-	XC6227C371ER	LVR-IC	LDO, 3.7V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3H8	-	XC6227C381ER	LVR-IC	LDO, 3.8V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3H9	-	XC6227C391ER	LVR-IC	LDO, 3.9V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3HA	-	XC6227C401ER	LVR-IC	LDO, 4.0V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3HB	-	XC6227C411ER	LVR-IC	LDO, 4.1V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3HC	-	XC6227C421ER	LVR-IC	LDO, 4.2V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3HD	-	XC6227C431ER	LVR-IC	LDO, 4.3V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3HE	-	XC6227C441ER	LVR-IC	LDO, 4.4V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3HF	-	XC6227C451ER	LVR-IC	LDO, 4.5V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3HH	-	XC6227C461ER	LVR-IC	LDO, 4.6V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3HK	-	XC6227C471ER	LVR-IC	LDO, 4.7V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3HL	-	XC6227C481ER	LVR-IC	LDO, 4.8V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3HM	-	XC6227C491ER	LVR-IC	LDO, 9V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3HN	-	XC6227C501ER	LVR-IC	LDO, 5.0V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3i	-	BU34UA3WNVX	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
3J	-	R3117K151C	Vdet-IC	1.5V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3J	-	RP101K261B	LVR-IC	LDO, LN, 2.6V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3J	-	RP112K181D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3J	-	RP173K181B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3K	-	R3117K161C	Vdet-IC	1.6V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3K	-	RP101K271B	LVR-IC	LDO, LN, 2.7V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3K	-	RP112K191D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3K	-	RP173K191B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3K	-	UNRF1AN	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=4k7/47k	ML3	22ta	-	2b	Pan
3K	-	XC6217D1827R-G	LVR-IC	LDO, 1.8V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3K	-	XC6223D2719R-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3K	-	XC6224B25B7R	LVR-IC	LDO, 2.55V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
3K	-	XC6229H3511R-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3K0	-	XC6227C30BER	LVR-IC	LDO, 3.05V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3K1	-	XC6227C31BER	LVR-IC	LDO, 3.15V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3K2	-	XC6227C32BER	LVR-IC	LDO, 3.25V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3K3	-	XC6227C33BER	LVR-IC	LDO, 3.35V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3K4	-	XC6227C34BER	LVR-IC	LDO, 3.45V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3K5	-	XC6227C35BER	LVR-IC	LDO, 3.55V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3K6	-	XC6227C36BER	LVR-IC	LDO, 3.65V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3K7	-	XC6227C37BER	LVR-IC	LDO, 3.75V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3K8	-	XC6227C38BER	LVR-IC	LDO, 3.85V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3K9	-	XC6227C39BER	LVR-IC	LDO, 3.95V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3KA	-	XC6227C40BER	LVR-IC	LDO, 4.05V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3KB	-	XC6227C41BER	LVR-IC	LDO, 4.15V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3KC	-	XC6227C42BER	LVR-IC	LDO, 4.25V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3KD	-	XC6227C43BER	LVR-IC	LDO, 4.35V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3KE	-	XC6227C44BER	LVR-IC	LDO, 4.45V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3KF	-	XC6227C45BER	LVR-IC	LDO, 4.55V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3KH	-	XC6227C46BER	LVR-IC	LDO, 4.65V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3KK	-	XC6227C47BER	LVR-IC	LDO, 4.75V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3KL	-	XC6227C48BER	LVR-IC	LDO, 4.85V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3KM	-	XC6227C49BER	LVR-IC	LDO, 4.95V±1%, 700mA, +CE, PDR	USP-6C	49hq	VR4	9a	Tor
3L	-	R3117K171C	Vdet-IC	1.7V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3L	-	RP101K281B	LVR-IC	LDO, LN, 2.8V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3L	-	RP112K201D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3L	-	RP173K201B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3L	-	XC6217D1927R-G	LVR-IC	LDO, 1.9V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3L	-	XC6223D2819R-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3L	-	XC6224B26B7R	LVR-IC	LDO, 2.65V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
3L	-	XC6229H35B1R-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3L0	-	XC6221A31BGR	LVR-IC	LDO, 3.15V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3L1	-	XC6221A32BGR	LVR-IC	LDO, 3.25V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3L2	-	XC6221A33BGR	LVR-IC	LDO, 3.35V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3L3	-	XC6221A34BGR	LVR-IC	LDO, 3.45V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3L4	-	XC6221A35BGR	LVR-IC	LDO, 3.55V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3L5	-	AP6203L-12GU	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3L5	-	AP6203L-12PU	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, CL	UFN-6	56hq	VR4	9i	Anw
3L5	-	XC6221A36BGR	LVR-IC	LDO, 3.65V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3L6	-	XC6221A37BGR	LVR-IC	LDO, 3.75V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3L7	-	XC6221A38BGR	LVR-IC	LDO, 3.85V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3L8	-	AP6203L-15GU	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3L8	-	AP6203L-15PU	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, CL	UFN-6	56hq	VR4	9i	Anw
3L8	-	XC6221A39BGR	LVR-IC	LDO, 3.95V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3L9	-	XC6221A40BGR	LVR-IC	LDO, 4.05±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3LA	-	AP6203L-18GU	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LA	-	AP6203L-18PU	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, CL	UFN-6	56hq	VR4	9i	Anw
3LA	-	AP6233A-285NHFGU	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LA	-	AP6233A-285NHFPU	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3LA	-	XC6221A41BGR	LVR-IC	LDO, 4.15±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3LA	mg	AP6233A-285NHFGU1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LA	mg	AP6233A-285NHFPU1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3LB	-	AP6233A-285NLFGU	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LB	-	AP6233A-285NLFPU	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3LB	-	XC6221A42BGR	LVR-IC	LDO, 4.25±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3LB	mg	AP6233A-285NLFGU1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LB	mg	AP6233A-285NLFPU1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3LC	-	AP6233A-285NHNGU	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LC	-	AP6233A-285NHNPU	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
3LC	-	XC6221A43BGR	LVR-IC	LDO, 4.35±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3LC	mg	AP6233A-285NHNGU1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LC	mg	AP6233A-285NHNPU1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
3LD	-	AP6233A-285NLNGU	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LD	-	AP6233A-285NLNPU	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
3LD	-	XC6221A44BGR	LVR-IC	LDO, 4.45±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3LD	mg	AP6233A-285NLNGU1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LD	mg	AP6233A-285NLNPU1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
3LE	-	AP6233A-285UHFGU	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LE	-	AP6233A-285UHFPU	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3LE	-	XC6221A45BGR	LVR-IC	LDO, 4.55±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3LE	mg	AP6233A-285UHFGU1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LE	mg	AP6233A-285UHFPU1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3LF	-	AP6233A-285ULFGU	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LF	-	AP6233A-285ULFPU	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3LF	-	XC6221A46BGR	LVR-IC	LDO, 4.65±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3LF	mg	AP6233A-285ULFGU1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LF	mg	AP6233A-285ULFPU1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3LG	-	AP6203L-25GU	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LG	-	AP6203L-25PU	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, CL	UFN-6	56hq	VR4	9i	Anw
3LG	-	AP6233A-285UHNGU	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LG	-	AP6233A-285UHNPU	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3LG	mg	AP6233A-285UHNGU1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LG	mg	AP6233A-285UHNPU1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3LH	-	AP6233A-285ULNGU	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LH	-	AP6233A-285ULNPU	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3LH	-	XC6221A47BGR	LVR-IC	LDO, 4.75±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3LH	mg	AP6233A-285ULNGU1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LH	mg	AP6233A-285ULNPU1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3LJ	-	AP6203L-27GU	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LJ	-	AP6203L-27PU	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, CL	UFN-6	56hq	VR4	9i	Anw
3LJ	-	AP6233A-285DHFGU	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LJ	-	AP6233A-285DHFPU	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3LJ	mg	AP6233A-285DHFGU1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LJ	mg	AP6233A-285DHFPU1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3LK	-	AP6203L-28GU	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LK	-	AP6203L-28PU	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, CL	UFN-6	56hq	VR4	9i	Anw
3LK	-	AP6233A-285DLFGU	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LK	-	AP6233A-285DLFPU	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3LK	-	XC6221A48BGR	LVR-IC	LDO, 4.85±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3LK	mg	AP6233A-285DLFGU1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LK	mg	AP6233A-285DLFPU1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3LL	-	AP6203L-LLGU	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LL	-	AP6203L-LLPU	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, CL	UFN-6	56hq	VR4	9i	Anw
3LL	-	AP6233A-285DHNGU	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LL	-	AP6233A-285DHNPU	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3LL	-	XC6221A49BGR	LVR-IC	LDO, 4.95±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3LL	mg	AP6233A-285DHNGU1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LL	mg	AP6233A-285DHNPU1	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3LM	-	AP6203L-30GU	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LM	-	AP6203L-30PU	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, CL	UFN-6	56hq	VR4	9i	Anw
3LM	-	AP6233A-285DLNGU	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LM	-	AP6233A-285DLNPU	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3LM	mg	AP6233A-285DLNGU1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LM	mg	AP6233A-285DLNPU1	LVR-IC	LDO, 2.85V±1%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3LQ	-	AP6203L-33GU	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LQ	-	AP6203L-33PU	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, CL	UFN-6	56hq	VR4	9i	Anw
3LS	-	AP6203L-42GU	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LS	-	AP6203L-42PU	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, CL	UFN-6	56hq	VR4	9i	Anw
3LV	-	AP6203L-36GU	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3LV	-	AP6203L-36PU	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, CL	UFN-6	56hq	VR4	9i	Anw
3M	-	R3117K181C	Vdet-IC	1.8V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3M	-	RP101K281B5	LVR-IC	LDO, LN, 2.85V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3M	-	RP112K211D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3M	-	RP173K211B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3M	-	XC6217D2027R-G	LVR-IC	LDO, 2.0V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3M	-	XC6223D2919R-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3M	-	XC6224B27B7R	LVR-IC	LDO, 2.75V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
3M	-	XC6229H3611R-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3M0	-	XC6221B31BGR	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3M1	-	XC6221B32BGR	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3M2	-	XC6221B33BGR	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3M3	-	XC6221B34BGR	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3M4	-	XC6221B35BGR	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3M5	-	XC6221B36BGR	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3M6	-	XC6221B37BGR	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3M7	-	XC6221B38BGR	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3M8	-	XC6221B39BGR	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3M9	-	XC6221B40BGR	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3MA	-	AP6233A-30NHFGU	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MA	-	AP6233A-30NHFPU	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3MA	-	XC6221B41BGR	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3MA	mg	AP6233A-30NHFGU1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MA	mg	AP6233A-30NHFPU1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3MB	-	AP6233A-30NLFGU	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MB	-	AP6233A-30NLFPU	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3MB	-	XC6221B42BGR	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3MB	mg	AP6233A-30NLFGU1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MB	mg	AP6233A-30NLFPU1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3MC	-	AP6233A-30NHNGU	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MC	-	AP6233A-30NHNPU	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
3MC	-	XC6221B43BGR	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3MC	mg	AP6233A-30NHNGU1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MC	mg	AP6233A-30NHNPU1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
3MD	-	AP6233A-30NLNGU	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MD	-	AP6233A-30NLNPU	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
3MD	-	XC6221B44BGR	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3MD	mg	AP6233A-30NLNGU1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MD	mg	AP6233A-30NLNPU1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
3ME	-	AP6233A-30UHFGU	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ME	-	AP6233A-30UHFPU	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3ME	-	XC6221B45BGR	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3ME	mg	AP6233A-30UHFGU1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ME	mg	AP6233A-30UHFPU1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3MF	-	AP6233A-30ULFGU	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MF	-	AP6233A-30ULFPU	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3MF	-	XC6221B46BGR	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3MF	mg	AP6233A-30ULFGU1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MF	mg	AP6233A-30ULFPU1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3MG	-	AP6233A-30UHNGU	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MG	-	AP6233A-30UHNPU	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3MG	mg	AP6233A-30UHNGU1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MG	mg	AP6233A-30UHNPU1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3MH	-	AP6233A-30ULNGU	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MH	-	AP6233A-30ULNPU	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3MH	-	XC6221B47BGR	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3MH	mg	AP6233A-30ULNGU1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MH	mg	AP6233A-30ULNPU1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3MJ	-	AP6233A-30DHFGU	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MJ	-	AP6233A-30DHFPU	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3MJ	mg	AP6233A-30DHFGU1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MJ	mg	AP6233A-30DHFPU1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3MK	-	AP6233A-30DLFGU	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MK	-	AP6233A-30DLFPU	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3MK	-	XC6221B48BGR	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3MK	mg	AP6233A-30DLFGU1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MK	mg	AP6233A-30DLFPU1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3ML	-	AP6233A-30DHNGU	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ML	-	AP6233A-30DHNPU	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3ML	-	XC6221B49BGR	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3ML	mg	AP6233A-30DHNGU1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ML	mg	AP6233A-30DHNPU1	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3MM	-	AP6233A-30DLNGU	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3MM	-	AP6233A-30DLNPU	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3MM	mg	AP6233A-30DLNGU1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3MM	mg	AP6233A-30DLNPU1	LVR-IC	LDO, 3.0V±1%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3N	-	R3117K191C	Vdet-IC	1.9V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3N	-	RP101K291B	LVR-IC	LDO, LN, 2.9V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3N	-	RP112K221D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3N	-	RP173K221B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3N	-	XC6217D2127R-G	LVR-IC	LDO, 2.1V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3N	-	XC6223D3019R-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3N	-	XC6224B28B7R	LVR-IC	LDO, 2.85V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
3N	-	XC6229H36B1R-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3NA	-	AP6233A-31NHFGU	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NA	-	AP6233A-31NHFPU	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3NA	mg	AP6233A-31NHFGU1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NA	mg	AP6233A-31NHFPU1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3NB	-	AP6233A-31NLFGU	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NB	-	AP6233A-31NLFPU	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3NB	mg	AP6233A-31NLFGU1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NB	mg	AP6233A-31NLFPU1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3NC	-	AP6233A-31NHNGU	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NC	-	AP6233A-31NHNPU	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
3NC	mg	AP6233A-31NHNGU1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NC	mg	AP6233A-31NHNPU1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
3ND	-	AP6233A-31NLNGU	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ND	-	AP6233A-31NLNPU	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
3ND	mg	AP6233A-31NLNGU1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ND	mg	AP6233A-31NLNPU1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
3NE	-	AP6233A-31UHFGU	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NE	-	AP6233A-31UHFPU	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3NE	mg	AP6233A-31UHFGU1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NE	mg	AP6233A-31UHFPU1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3NF	-	AP6233A-31ULFGU	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NF	-	AP6233A-31ULFPU	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3NF	mg	AP6233A-31ULFGU1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NF	mg	AP6233A-31ULFPU1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3NG	-	AP6233A-31UHNGU	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NG	-	AP6233A-31UHNPU	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3NG	mg	AP6233A-31UHNGU1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NG	mg	AP6233A-31UHNPU1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3NH	-	AP6233A-31ULNGU	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NH	-	AP6233A-31ULNPU	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3NH	mg	AP6233A-31ULNGU1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NH	mg	AP6233A-31ULNPU1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3NJ	-	AP6233A-31DHFGU	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NJ	-	AP6233A-31DHFPU	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3NJ	mg	AP6233A-31DHFGU1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NJ	mg	AP6233A-31DHFPU1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3NK	-	AP6233A-31DLFGU	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NK	-	AP6233A-31DLFPU	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3NK	mg	AP6233A-31DLFGU1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NK	mg	AP6233A-31DLFPU1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3NL	-	AP6233A-31DHNGU	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NL	-	AP6233A-31DHNPU	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3NL	mg	AP6233A-31DHNGU1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NL	mg	AP6233A-31DHNPU1	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3NM	-	AP6233A-31DLNGU	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NM	-	AP6233A-31DLNPU	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3NM	mg	AP6233A-31DLNGU1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3NM	mg	AP6233A-31DLNPU1	LVR-IC	LDO, 3.1V±1%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3P	-	R3117K201C	Vdet-IC	2V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3P	-	RP101K301B	LVR-IC	LDO, LN, 3.0V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3P	-	RP112K231D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3P	-	RP173K231B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3P	-	XC6217D2227R-G	LVR-IC	LDO, 2.2V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3P	-	XC6223D3119R-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3P	-	XC6224B29B7R	LVR-IC	LDO, 2.95V±1.5%, 150mA, +CE, PDR	USPN-4B02	58vm	VR4	9e	Tor
3P	-	XC6229H3711R-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3Q	-	R3117K211C	Vdet-IC	2.1V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3Q	-	RP101K311B	LVR-IC	LDO, LN, 3.1V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3Q	-	RP112K241D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3Q	-	RP173K241B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3QA	-	AP6233A-33NHFGU	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3QA	-	AP6233A-33NHFPU	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3QA	mg	AP6233A-33NHFGU1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QA	mg	AP6233A-33NHFPU1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3QB	-	AP6233A-33NLFGU	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QB	-	AP6233A-33NLFPU	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3QB	mg	AP6233A-33NLFGU1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QB	mg	AP6233A-33NLFPU1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3QC	-	AP6233A-33NHNGU	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QC	-	AP6233A-33NHNPU	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
3QC	mg	AP6233A-33NHNGU1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QC	mg	AP6233A-33NHNPU1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
3QD	-	AP6233A-33NLNGU	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QD	-	AP6233A-33NLNPU	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
3QD	mg	AP6233A-33NLNGU1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QD	mg	AP6233A-33NLNPU1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
3QE	-	AP6233A-33UHFGU	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QE	-	AP6233A-33UHFPU	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3QE	mg	AP6233A-33UHFGU1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QE	mg	AP6233A-33UHFPU1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3QF	-	AP6233A-33ULFGU	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QF	-	AP6233A-33ULFPU	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3QF	mg	AP6233A-33ULFGU1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QF	mg	AP6233A-33ULFPU1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3QG	-	AP6233A-33UHNGU	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QG	-	AP6233A-33UHNPU	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3QG	mg	AP6233A-33UHNGU1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QG	mg	AP6233A-33UHNPU1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3QH	-	AP6233A-33ULNGU	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QH	-	AP6233A-33ULNPU	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3QH	mg	AP6233A-33ULNGU1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QH	mg	AP6233A-33ULNPU1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3QJ	-	AP6233A-33DHFGU	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QJ	-	AP6233A-33DHFPU	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3QJ	mg	AP6233A-33DHFGU1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QJ	mg	AP6233A-33DHFPU1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3QK	-	AP6233A-33DLFGU	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QK	-	AP6233A-33DLFPU	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3QK	mg	AP6233A-33DLFGU1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QK	mg	AP6233A-33DLFPU1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3QL	-	AP6233A-33DHNGU	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QL	-	AP6233A-33DHNPU	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3QL	mg	AP6233A-33DHNGU1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QL	mg	AP6233A-33DHNPU1	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3QM	-	AP6233A-33DLNGU	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QM	-	AP6233A-33DLNPU	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3QM	mg	AP6233A-33DLNGU1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3QM	mg	AP6233A-33DLNPU1	LVR-IC	LDO, 3.3V±1%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3R	-	R3117K221C	Vdet-IC	2.2V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3R	-	RP101K331B	LVR-IC	LDO, LN, 3.3V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3R	-	RP112K251D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3R	-	RP173K251B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3R	-	XC6217D2327R-G	LVR-IC	LDO, 2.3V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3R	-	XC6223D3219R-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3R	-	XC6229H37B1R-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3S	-	R3117K231C	Vdet-IC	2.3V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3S	-	RP101K211B	LVR-IC	LDO, LN, 2.1V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3S	-	RP112K261D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3S	-	RP173K261B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3S	-	UNRF1A2	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=22k/22k	ML3	22ta	-	2b	Pan
3S	-	XC6217D2427R-G	LVR-IC	LDO, 2.4V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3S	-	XC6223D3319R-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3S	-	XC6229H3811R-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3T	-	R3117K241C	Vdet-IC	2.4V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3T	-	RP101K231B	LVR-IC	LDO, LN, 2.3V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3T	-	RP112K271D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3T	-	RP173K271B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3T	-	UNRF1A4	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=10k47k	ML3	22ta	-	2b	Pan
3T	-	XC6217D2527R-G	LVR-IC	LDO, 2.5V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3T	-	XC6223D3419R-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3T	-	XC6229H38B1R-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3U	-	R3117K251C	Vdet-IC	2.5V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3U	-	RP101K241B	LVR-IC	LDO, LN, 2.4V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3U	-	RP112K281D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3U	-	RP173K281B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3U	-	XC6217D2627R-G	LVR-IC	LDO, 2.6V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3U	-	XC6223D3519R-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3U	-	XC6229H3911R-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3V	-	ADP150ACBZ-2.5-R7	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	CB-4-3	63bc*	VR4	9a	Ad
3V	-	R3117K261C	Vdet-IC	2.6V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3V	-	RP101K321B	LVR-IC	LDO, LN, 3.2V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3V	-	RP112K281D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3V	-	RP173K281B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3V	-	XC6217D2727R-G	LVR-IC	LDO, 2.7V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3V	-	XC6223D3619R-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3V	-	XC6229H39B1R-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3V7	-	XC6221A081GR	LVR-IC	LDO, 0.8V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3V8	-	XC6221A091GR	LVR-IC	LDO, 0.9V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3V9	-	XC6221A101GR	LVR-IC	LDO, 1.0V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VA	-	AP6233A-36NHFGU	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VA	-	AP6233A-36NHFPU	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3VA	-	XC6221A111GR	LVR-IC	LDO, 1.1V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VA	mg	AP6233A-36NHFGU1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VA	mg	AP6233A-36NHFPU1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3VB	-	AP6233A-36NLFGU	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VB	-	AP6233A-36NLFPU	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3VB	-	XC6221A121GR	LVR-IC	LDO, 1.2V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VB	mg	AP6233A-36NLFGU1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VB	mg	AP6233A-36NLFPU1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3VC	-	AP6233A-36NHNGU	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VC	-	AP6233A-36NHNPU	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
3VC	-	XC6221A131GR	LVR-IC	LDO, 1.3V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VC	mg	AP6233A-36NHNGU1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VC	mg	AP6233A-36NHNPU1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
3VD	-	AP6233A-36NLNGU	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VD	-	AP6233A-36NLNPU	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
3VD	-	XC6221A141GR	LVR-IC	LDO, 1.4V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VD	mg	AP6233A-36NLNGU1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VD	mg	AP6233A-36NLNPU1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
3VE	-	AP6233A-36UHFGU	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VE	-	AP6233A-36UHFPU	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3VE	-	XC6221A151GR	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VE	mg	AP6233A-36UHFGU1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VE	mg	AP6233A-36UHFPU1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3VF	-	AP6233A-36ULFGU	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VF	-	AP6233A-36ULFPU	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3VF	-	XC6221A161GR	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VF	mg	AP6233A-36ULFGU1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VF	mg	AP6233A-36ULFPU1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3VG	-	AP6233A-36UHNGU	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VG	-	AP6233A-36UHNPU	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3VG	mg	AP6233A-36UHNGU1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VG	mg	AP6233A-36UHNPU1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3VH	-	AP6233A-36ULNGU	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VH	-	AP6233A-36ULNPU	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3VH	-	XC6221A171GR	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VH	mg	AP6233A-36ULNGU1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VH	mg	AP6233A-36ULNPU1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3VJ	-	AP6233A-36DHFGU	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VJ	-	AP6233A-36DHFPU	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3VJ	mg	AP6233A-36DHFGU1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VJ	mg	AP6233A-36DHFPU1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3VK	-	AP6233A-36DLFGU	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VK	-	AP6233A-36DLFPU	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3VK	-	XC6221A181GR	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VK	mg	AP6233A-36DLFGU1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VK	mg	AP6233A-36DLFPU1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3VL	-	AP6233A-36DHNGU	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VL	-	AP6233A-36DHNPU	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3VL	-	XC6221A191GR	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VL	mg	AP6233A-36DHNGU1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3VL	mg	AP6233A-36DHNPU1	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3VM	-	AP6233A-36DLNGU	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VM	-	AP6233A-36DLNPU	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3VM	-	XC6221A201GR	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VM	mg	AP6233A-36DLNGU1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3VM	mg	AP6233A-36DLNPU1	LVR-IC	LDO, 3.6V±1%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3VN	-	XC6221A211GR	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VP	-	XC6221A221GR	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VR	-	XC6221A231GR	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VS	-	XC6221A241GR	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VT	-	XC6221A251GR	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VU	-	XC6221A261GR	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VV	-	XC6221A271GR	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VX	-	XC6221A281GR	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VY	-	XC6221A291GR	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3VZ	-	XC6221A301GR	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
3W	-	R3117K271C	Vdet-IC	2.7V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3W	-	RP101K221B	LVR-IC	LDO, LN, 2.2V±0.8%, 300mA, +CE	DFN1612-4	45vm	VR4	9a	Ric
3W	-	RP112K291D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3W	-	RP173K291B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3X	-	ADP150ACBZ-2.75R7	LVR-IC	LDO, 2.75V±1%, 150mA, +CE	CB-4-3	63bc*	VR4	9a	Ad
3X	-	R3117K281C	Vdet-IC	2.8V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3X	-	RP112K301D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3X	-	RP173K301B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3X	-	UNRF1A6	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1=4k7	ML3	22ta	-	2b	Pan
3X	-	XC6217D2827R-G	LVR-IC	LDO, 2.8V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3X	-	XC6223D3719R-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3X	-	XC6229H4011R-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, ICP	BGA-4	63ba*	VR4	9a	Tor
3X0	-	XC6221B311GR	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3X7	-	XC6221B081GR	LVR-IC	LDO, 0.8V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3X8	-	XC6221B091GR	LVR-IC	LDO, 0.9V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3X9	-	XC6221B101GR	LVR-IC	LDO, 1.0V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XA	-	XC6221B111GR	LVR-IC	LDO, 1.1V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XB	-	XC6221B121GR	LVR-IC	LDO, 1.2V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XC	-	XC6221B131GR	LVR-IC	LDO, 1.3V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XD	-	XC6221B141GR	LVR-IC	LDO, 1.4V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XE	-	XC6221B151GR	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XF	-	XC6221B161GR	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XH	-	XC6221B171GR	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XK	-	XC6221B181GR	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XL	-	XC6221B191GR	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XM	-	XC6221B201GR	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XN	-	XC6221B211GR	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XP	-	XC6221B221GR	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XR	-	XC6221B231GR	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XS	-	XC6221B241GR	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XT	-	XC6221B251GR	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XU	-	XC6221B261GR	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XV	-	XC6221B271GR	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XX	-	XC6221B281GR	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XY	-	XC6221B291GR	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3XZ	-	XC6221B301GR	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
3Y	-	ADP150ACBZ-2.85R7	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	CB-4-3	63bc*	VR4	9a	Ad
3Y	-	R3117K291C	Vdet-IC	2.9V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3Y	-	RP112K311D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3Y	-	RP173K311B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3Y	-	UNRF1A7	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1=22k	ML3	22ta	-	2b	Pan
3Y	-	XC6217D2927R-G	LVR-IC	LDO, 2.9V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3Y	-	XC6223D3819R-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3Z	-	R3117K301C	Vdet-IC	3.0V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
3Z	-	RP112K321D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
3Z	-	RP173K321B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
3Z	-	XC6217D3027R-G	LVR-IC	LDO, 3.0V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
3Z	-	XC6223D3919R-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
3ZA	-	AP6233A-50NHFGU	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZA	-	AP6233A-50NHFPU	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3ZA	mg	AP6233A-50NHFGU1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZA	mg	AP6233A-50NHFPU1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3ZB	-	AP6233A-50NLFGU	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZB	-	AP6233A-50NLFPU	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
3ZB	mg	AP6233A-50NLFGU1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZB	mg	AP6233A-50NLFPU1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge	UFN-6	56hq	VR4	9ib	Anw
3ZC	-	AP6233A-50NHNGU	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZC	-	AP6233A-50NHNPU	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
3ZC	mg	AP6233A-50NHNGU1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZC	mg	AP6233A-50NHNPU1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE	UFN-6	56hq	VR4	9ib	Anw
3ZD	-	AP6233A-50NLNGU	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZD	-	AP6233A-50NLNPU	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
3ZD	mg	AP6233A-50NLNGU1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZD	mg	AP6233A-50NLNPU1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE	UFN-6	56hq	VR4	9ib	Anw
3ZE	-	AP6233A-50UHFGU	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZE	-	AP6233A-50UHFPU	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3ZE	mg	AP6233A-50UHFGU1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZE	mg	AP6233A-50UHFPU1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3ZF	-	AP6233A-50ULFGU	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZF	-	AP6233A-50ULFPU	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3ZF	mg	AP6233A-50ULFGU1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZF	mg	AP6233A-50ULFPU1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge, PUR	UFN-6	56hq	VR4	9ib	Anw
3ZG	-	AP6233A-50UHNGU	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZG	-	AP6233A-50UHNPU	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3ZG	mg	AP6233A-50UHNGU1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZG	mg	AP6233A-50UHNPU1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3ZH	-	AP6233A-50ULNGU	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZH	-	AP6233A-50ULNPU	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3ZH	mg	AP6233A-50ULNGU1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZH	mg	AP6233A-50ULNPU1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
3ZJ	-	AP6233A-50DHFGU	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZJ	-	AP6233A-50DHFPU	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3ZJ	mg	AP6233A-50DHFGU1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZJ	mg	AP6233A-50DHFPU1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3ZK	-	AP6233A-50DLFGU	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZK	-	AP6233A-50DLFPU	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3ZK	mg	AP6233A-50DLFGU1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZK	mg	AP6233A-50DLFPU1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, Fast discharge, PDR	UFN-6	56hq	VR4	9ib	Anw
3ZL	-	AP6233A-50DHNGU	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZL	-	AP6233A-50DHNPU	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3ZL	mg	AP6233A-50DHNGU1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZL	mg	AP6233A-50DHNPU1	LVR-IC	LDO, 5.0V±1%, 300mA, +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3ZM	-	AP6233A-50DLNGU	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZM	-	AP6233A-50DLNPU	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
3ZM	mg	AP6233A-50DLNGU1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
3ZM	mg	AP6233A-50DLNPU1	LVR-IC	LDO, 5.0V±1%, 300mA, -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
40	-	2SA1037M1PT-S	Si-pnp	AF, 60V, 150mA, 200mW, B=270..560, 140MHz	FBPT-723	17ta	-	9a	Chm
40	-	RP110L151C	LVR-IC	LDO, 1.5V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
40	-	XC6217D3127R-G	LVR-IC	LDO, 3.1V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
40	-	XC6420AB407R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/3.30V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
40	-	XC6420AB40DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/3.30V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
4011	-	MD4011	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 3W(5V/4Ω), shutdown	DFN-8	92	AFP24	9d	Mep
40N	-	XC9140A1814R-G	DC-DC-IC	PWM step-up, 1.8V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
40P	-	XC9140A3514R-G	DC-DC-IC	PWM step-up, 3.5V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
40T	-	XC9140C1814R-G	DC-DC-IC	PWM step-up, 1.8V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
40U	-	XC9140C3514R-G	DC-DC-IC	PWM step-up, 3.5V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
41	-	RP110L161C	LVR-IC	LDO, 1.6V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
41	-	XC6217D3227R-G	LVR-IC	LDO, 3.2V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
41	-	XC6420AB417R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/3.30V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
41	-	XC6420AB41DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/3.30V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
4103	-	MD4103D	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 3W(5V/4Ω), shutdown	DFN-8 2x2	75	-	9d	Mep
4105	-	MD4105D	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 3.3W(5V/4Ω), shutdown	DFN-8	92	-	9d	Mep
41N	-	XC9140A1914R-G	DC-DC-IC	PWM step-up, 1.9V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
41P	-	XC9140A3614R-G	DC-DC-IC	PWM step-up, 3.6V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
41T	-	XC9140C1914R-G	DC-DC-IC	PWM step-up, 1.9V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
41U	-	XC9140C3614R-G	DC-DC-IC	PWM step-up, 3.6V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
42	-	RP110L171C	LVR-IC	LDO, 1.7V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
42	-	XC6217D3327R-G	LVR-IC	LDO, 3.3V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
42	-	XC6223E1219R-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
42	-	XC6420AB427R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.30/1.50V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
42	-	XC6420AB42DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.30/1.50V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
4201	-	AK4201EU	Lin-IC	AF PA, 2.6..5.5V, 2x65mW(5V/16Ω), shutdown	DFN-12	37	-	9a	Ask
4213	-	AK4213EC	Lin-IC	AF PA, BTL, class-D, 2.6..5.5V, 1.6W+2x64mW(5V/(4/16Ω), I2C	BGA-29	39	-	9a	Ask
42N	-	XC9140A2014R-G	DC-DC-IC	PWM step-up, 2.0V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
42P	-	XC9140A3714R-G	DC-DC-IC	PWM step-up, 3.7V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
42T	-	XC9140C2014R-G	DC-DC-IC	PWM step-up, 2.0V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
42U	-	XC9140C3714R-G	DC-DC-IC	PWM step-up, 3.7V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
43	-	RP110L181C	LVR-IC	LDO, 1.8V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
43	-	XC6217D3427R-G	LVR-IC	LDO, 3.4V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
43	-	XC6223E1319R-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
43	-	XC6420AB437R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.60/2.80V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
43	-	XC6420AB43DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.60/2.80V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
43N	-	XC9140A2114R-G	DC-DC-IC	PWM step-up, 2.1V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
43P	-	XC9140A3814R-G	DC-DC-IC	PWM step-up, 3.8V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
43T	-	XC9140C2114R-G	DC-DC-IC	PWM step-up, 2.1V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
43U	-	XC9140C3814R-G	DC-DC-IC	PWM step-up, 3.8V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
44	-	CHT44T1PT	Si-npn	Drv, 300V, 300mA, B=50..240, 50MHz	FBPT-523	17ta	-	9a	Chm
44	-	RP110L181C5	LVR-IC	LDO, 1.85V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
44	-	XC6217D3527R-G	LVR-IC	LDO, 3.5V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
44	-	XC6221D1217R	LVR-IC	LDO, 1.2V±20mV, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
44	-	XC6223E1419R-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
44	-	XC6420AB447R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.10/3.30V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
44	-	XC6420AB44DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.10/3.30V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
44A	-	AP6233S-10NHFGU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44A	-	AP6233S-10NHFPU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
44A	mg	AP6233S-10NHFGU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44A	mg	AP6233S-10NHFPU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
44B	-	AP6233S-10NLFGU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44B	-	AP6233S-10NLFPU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
44B	mg	AP6233S-10NLFGU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44B	mg	AP6233S-10NLFPU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
44C	-	AP6233S-10NHNGU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44C	-	AP6233S-10NHNPU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
44C	mg	AP6233S-10NHNGU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44C	mg	AP6233S-10NHNPU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
44D	-	AP6233S-10NLNGU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44D	-	AP6233S-10NLNPU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
44D	mg	AP6233S-10NLNGU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44D	mg	AP6233S-10NLNPU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
44E	-	AP6233S-10UHFGU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44E	-	AP6233S-10UHFPU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
44E	mg	AP6233S-10UHFGU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44E	mg	AP6233S-10UHFPU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
44F	-	AP6233S-10ULFGU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44F	-	AP6233S-10ULFPU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
44F	mg	AP6233S-10ULFGU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44F	mg	AP6233S-10ULFPU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
44G	-	AP6233S-10UHNGU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44G	-	AP6233S-10UHNPU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
44G	mg	AP6233S-10UHNGU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44G	mg	AP6233S-10UHNPU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
44H	-	AP6233S-10ULNGU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44H	-	AP6233S-10ULNPU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
44H	mg	AP6233S-10ULNGU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44H	mg	AP6233S-10ULNPU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
44J	-	AP6233S-10DHFGU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44J	-	AP6233S-10DHFPU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
44J	mg	AP6233S-10DHFGU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44J	mg	AP6233S-10DHFPU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
44K	-	AP6233S-10DLFGU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44K	-	AP6233S-10DLFPU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
44K	mg	AP6233S-10DLFGU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44K	mg	AP6233S-10DLFPU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
44L	-	AP6233S-10DHNGU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44L	-	AP6233S-10DHNPU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
44L	mg	AP6233S-10DHNGU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44L	mg	AP6233S-10DHNPU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
44M	-	AP6233S-10DLNGU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44M	-	AP6233S-10DLNPU	LVR-IC	LDO, 1.0V±2%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
44M	mg	AP6233S-10DLNGU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
44M	mg	AP6233S-10DLNPU1	LVR-IC	LDO, 1.0V±1%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
44N	-	XC9140A2214R-G	DC-DC-IC	PWM step-up, 2.2V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
44P	-	XC9140A3914R-G	DC-DC-IC	PWM step-up, 3.9V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
44T	-	XC9140C2214R-G	DC-DC-IC	PWM step-up, 2.2V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
44U	-	XC9140C3914R-G	DC-DC-IC	PWM step-up, 3.9V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
45	-	RP110L191C	LVR-IC	LDO, 1.9V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
45	-	XC6217D3627R-G	LVR-IC	LDO, 3.6V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
45	-	XC6221D1317R	LVR-IC	LDO, 1.3V±20mV, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
45	-	XC6223E1519R-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
45	-	XC6420AB457R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.60V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
45	-	XC6420AB45DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/2.60V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
45A	-	AP6233S-12NHFGU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45A	-	AP6233S-12NHFPU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
45A	mg	AP6233S-12NHFGU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45A	mg	AP6233S-12NHFPU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
45B	-	AP6233S-12NLFGU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45B	-	AP6233S-12NLFPU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
45B	mg	AP6233S-12NLFGU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45B	mg	AP6233S-12NLFPU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
45C	-	AP6233S-12NHNGU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45C	-	AP6233S-12NHNPU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
45C	mg	AP6233S-12NHNGU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45C	mg	AP6233S-12NHNPU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
45D	-	AP6233S-12NLNGU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45D	-	AP6233S-12NLNPU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
45D	mg	AP6233S-12NLNGU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45D	mg	AP6233S-12NLNPU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
45E	-	AP6233S-12UHFGU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45E	-	AP6233S-12UHFPU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
45E	mg	AP6233S-12UHFGU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45E	mg	AP6233S-12UHFPU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
45F	-	AP6233S-12ULFGU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45F	-	AP6233S-12ULFPU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
45F	mg	AP6233S-12ULFGU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45F	mg	AP6233S-12ULFPU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
45G	-	AP6233S-12UHNGU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45G	-	AP6233S-12UHNPU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
45G	mg	AP6233S-12UHNGU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45G	mg	AP6233S-12UHNPU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
45H	-	AP6233S-12ULNGU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45H	-	AP6233S-12ULNPU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
45H	mg	AP6233S-12ULNGU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45H	mg	AP6233S-12ULNPU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
45J	-	AP6233S-12DHFGU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45J	-	AP6233S-12DHFPU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
45J	mg	AP6233S-12DHFGU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45J	mg	AP6233S-12DHFPU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
45K	-	AP6233S-12DLFGU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45K	-	AP6233S-12DLFPU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
45K	mg	AP6233S-12DLFGU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45K	mg	AP6233S-12DLFPU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
45L	-	AP6233S-12DHNGU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45L	-	AP6233S-12DHNPU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
45L	mg	AP6233S-12DHNGU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45L	mg	AP6233S-12DHNPU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
45M	-	AP6233S-12DLNGU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45M	-	AP6233S-12DLNPU	LVR-IC	LDO, 1.2V±2%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
45M	mg	AP6233S-12DLNGU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
45M	mg	AP6233S-12DLNPU1	LVR-IC	LDO, 1.2V±1%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
45N	-	XC9140A2314R-G	DC-DC-IC	PWM step-up, 2.3V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
45P	-	XC9140A4014R-G	DC-DC-IC	PWM step-up, 4.0V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
45T	-	XC9140C2314R-G	DC-DC-IC	PWM step-up, 2.3V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
45U	-	XC9140C4014R-G	DC-DC-IC	PWM step-up, 4.0V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
46	-	ADP150ACBZ-2.8-R7	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	CB-4-3	63bc*	VR4	9a	Ad
46	-	MMDT3946LP4	Si-n/p	Dual, GP, 60V, 200mA, 200mW, B= 100..300, >300MHz	DFN1310-6	87	T9	9m	Di
46	-	RP110L201C	LVR-IC	LDO, 2.0V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
46	-	XC6217D3727R-G	LVR-IC	LDO, 3.7V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
46	-	XC6221D1417R	LVR-IC	LDO, 1.4V±20mV, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
46	-	XC6223E1619R-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
46	-	XC6420AB467R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.60/3.30V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
46	-	XC6420AB46DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.60/3.30V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
46M	-	MIC5320-4.6/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=4.6V/2.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
46N	-	XC9140A2414R-G	DC-DC-IC	PWM step-up, 2.4V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
46P	-	XC9140A4114R-G	DC-DC-IC	PWM step-up, 4.1V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
46T	-	XC9140C2414R-G	DC-DC-IC	PWM step-up, 2.4V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
46U	-	XC9140C4114R-G	DC-DC-IC	PWM step-up, 4.1V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
47	-	ADP150ACBZ-3.0-R7	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	CB-4-3	63bc*	VR4	9a	Ad
47	-	RP110L211C	LVR-IC	LDO, 2.1V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
47	-	XC6217D3827R-G	LVR-IC	LDO, 3.8V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
47	-	XC6221D1517R	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
47	-	XC6223E1719R-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
47	-	XC6420AB477R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.40/3.40V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
47	-	XC6420AB47DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.40/3.40V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
47N	-	XC9140A2514R-G	DC-DC-IC	PWM step-up, 2.5V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
47P	-	XC9140A4214R-G	DC-DC-IC	PWM step-up, 4.2V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
47T	-	XC9140C2514R-G	DC-DC-IC	PWM step-up, 2.5V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
47U	-	XC9140C4214R-G	DC-DC-IC	PWM step-up, 4.2V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
48	-	ADP150ACBZ-3.3-R7	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	CB-4-3	63bc*	VR4	9a	Ad
48	-	RP110L221C	LVR-IC	LDO, 2.2V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
48	-	XC6217D3927R-G	LVR-IC	LDO, 3.9V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
48	-	XC6221D1617R	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
48	-	XC6223E1819R-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
48	-	XC6420AB487R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/2.60V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
48	-	XC6420AB48DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85/2.60V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
482I	-	TS482IQT	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω)	DFN-8	92	AFP6	9a	Ste
48511SQ	-	LM48511SQ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/4Ω), shutdown	LQFP-24	38	-	9a	Nsc
4866TQ	-	SGM4866YTQ16G	Lin-IC	AF PA, BTL, 2.6..5.5V, 2x1.28W(5V/8Ω)	QFN-16	38	-	9m	Sgm
4871	-	TS4871IQT	Lin-IC	AF PA, BTL, 2.5..5.5V, 1W(5V/8Ω), shutdown	DFN-8	92	AFP12	9a	Ste
4872	-	TS4872IJT	Lin-IC	AF PA, BTL, 2.5..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Ste
4890	-	MC4890D	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.5W(5V/8Ω), shutdown	DFN-8	92	AFP12	9a	Mep
4890	-	TS4890IQT	Lin-IC	AF PA, BTL, 2.5..5.5V, 1W(5V/8Ω), shutdown	DFN-8	92	AFP12	9a	Ste
4890YG	-	SGM4890YG	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.1W(5V/8Ω), shutdown	BGA-9	39	AFP44	9k	Sgm
4891	-	SGM4891YDE8G	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.2W(5V/8Ω)	DFN-8	92	AFP12	9m	Sgm
4894	-	NCP4894MNR2	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.8W(5V/8Ω), shutdown	DFN-10	37	AFP19	9a	Ons
4894	-	NCP4894MNR2G	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.8W(5V/8Ω), shutdown	DFN-10	37	AFP19	9a	Ons
4894YG	-	SGM4894YDB8	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.1W(5V/8Ω), shutdown	BGA-9	39	AFP51	9m	Sgm
4896YG	-	SGM4896YG	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.15W(5V/8Ω), shutdown	BGA-8A	39	AFP47	9m	Sgm
48A	-	AP6233S-15NHFGU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48A	-	AP6233S-15NHFPU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
48A	mg	AP6233S-15NHFGU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48A	mg	AP6233S-15NHFPU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
48B	-	AP6233S-15NLFGU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48B	-	AP6233S-15NLFPU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
48B	mg	AP6233S-15NLFGU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48B	mg	AP6233S-15NLFPU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
48C	-	AP6233S-15NHNGU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48C	-	AP6233S-15NHNPU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
48C	mg	AP6233S-15NHNGU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48C	mg	AP6233S-15NHNPU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
48D	-	AP6233S-15NLNGU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48D	-	AP6233S-15NLNPU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
48D	mg	AP6233S-15NLNGU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48D	mg	AP6233S-15NLNPU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
48E	-	AP6233S-15UHFGU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48E	-	AP6233S-15UHFPU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
48E	mg	AP6233S-15UHFGU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48E	mg	AP6233S-15UHFPU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
48F	-	AP6233S-15ULFGU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48F	-	AP6233S-15ULFPU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
48F	mg	AP6233S-15ULFGU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48F	mg	AP6233S-15ULFPU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
48G	-	AP6233S-15UHNGU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48G	-	AP6233S-15UHNPU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
48G	mg	AP6233S-15UHNGU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48G	mg	AP6233S-15UHNPU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
48H	-	AP6233S-15ULNGU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48H	-	AP6233S-15ULNPU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
48H	mg	AP6233S-15ULNGU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48H	mg	AP6233S-15ULNPU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
48J	-	AP6233S-15DHFGU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48J	-	AP6233S-15DHFPU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
48J	mg	AP6233S-15DHFGU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48J	mg	AP6233S-15DHFPU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
48K	-	AP6233S-15DLFGU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
48K	-	AP6233S-15DLFPU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
48K	mg	AP6233S-15DLFGU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48K	mg	AP6233S-15DLFPU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
48L	-	AP6233S-15DHNGU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48L	-	AP6233S-15DHNPU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
48L	mg	AP6233S-15DHNGU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48L	mg	AP6233S-15DHNPU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
48M	-	AP6233S-15DLNGU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48M	-	AP6233S-15DLNPU	LVR-IC	LDO, 1.5V±2%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
48M	mg	AP6233S-15DLNGU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
48M	mg	AP6233S-15DLNPU1	LVR-IC	LDO, 1.5V±1%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
48N	-	XC9140A2614R-G	DC-DC-IC	PWM step-up, 2.6V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
48P	-	XC9140A4314R-G	DC-DC-IC	PWM step-up, 4.3V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
48T	-	XC9140C2614R-G	DC-DC-IC	PWM step-up, 2.6V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
48U	-	XC9140C4314R-G	DC-DC-IC	PWM step-up, 4.3V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
49	-	LEE-49+	MMIC	RF amplifier, DC..5GHz, 12dB (50Ω)	FG873	36aa	A1	9b	Mc
49	-	RP110L231C	LVR-IC	LDO, 2.3V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
49	-	XC6217D4027R-G	LVR-IC	LDO, 4.0V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
49	-	XC6221D1717R	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
49	-	XC6223E1919R-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
49	-	XC6420AB497R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/1.80V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
49	-	XC6420AB49DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/1.80V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
4972	-	TS4972IJT	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Ste
4990	-	AUD4990CS09	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(5V /4Ω), select shutdown	BGA-9	39	-	9a	Axp
4992A	-	EUA4992AJ	Lin-IC	AF PA, BTL, 2.2..5.5V, 2x2.5W(5V/4Ω), shutdown	TQFN-16	38a5	-	9a	Eut
4996	-	MC4996	Lin-IC	AF PA, BTL, 2.5..5.5V, 2W(5V /4Ω), shutdown	DFN-8	92	AFP12	9a	Mep
49N	-	XC9140A2714R-G	DC-DC-IC	PWM step-up, 2.7V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
49P	-	XC9140A4414R-G	DC-DC-IC	PWM step-up, 4.4V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
49T	-	XC9140C2714R-G	DC-DC-IC	PWM step-up, 2.7V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
49U	-	XC9140C4414R-G	DC-DC-IC	PWM step-up, 4.4V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
4A	-	R3117K311C	Vdet-IC	3.1V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4A	-	RP101K121D	LVR-IC	LDO, LN, 1.1V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4A	-	RP112K331D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
4A	-	RP173K331B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4A	-	XC6221D1817R	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4A	-	XC6223E2019R-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4A016	-	XC6107A016ER	Vdet-IC	1.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A017	-	XC6107A017ER	Vdet-IC	1.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A018	-	XC6107A018ER	Vdet-IC	1.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A019	-	XC6107A019ER	Vdet-IC	1.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A020	-	XC6107A020ER	Vdet-IC	2.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A021	-	XC6107A021ER	Vdet-IC	2.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A022	-	XC6107A022ER	Vdet-IC	2.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A023	-	XC6107A023ER	Vdet-IC	2.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A024	-	XC6107A024ER	Vdet-IC	2.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A025	-	XC6107A025ER	Vdet-IC	2.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A026	-	XC6107A026ER	Vdet-IC	2.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A027	-	XC6107A027ER	Vdet-IC	2.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A028	-	XC6107A028ER	Vdet-IC	2.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A029	-	XC6107A029ER	Vdet-IC	2.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A030	-	XC6107A030ER	Vdet-IC	3.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A031	-	XC6107A031ER	Vdet-IC	3.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A032	-	XC6107A032ER	Vdet-IC	3.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A033	-	XC6107A033ER	Vdet-IC	3.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A034	-	XC6107A034ER	Vdet-IC	3.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A035	-	XC6107A035ER	Vdet-IC	3.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A036	-	XC6107A036ER	Vdet-IC	3.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A037	-	XC6107A037ER	Vdet-IC	3.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A038	-	XC6107A038ER	Vdet-IC	3.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A039	-	XC6107A039ER	Vdet-IC	3.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A040	-	XC6107A040ER	Vdet-IC	4.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A041	-	XC6107A041ER	Vdet-IC	4.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A042	-	XC6107A042ER	Vdet-IC	4.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A043	-	XC6107A043ER	Vdet-IC	4.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A044	-	XC6107A044ER	Vdet-IC	4.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A045	-	XC6107A045ER	Vdet-IC	4.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A046	-	XC6107A046ER	Vdet-IC	4.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A047	-	XC6107A047ER	Vdet-IC	4.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A048	-	XC6107A048ER	Vdet-IC	4.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A049	-	XC6107A049ER	Vdet-IC	4.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4A050	-	XC6107A050ER	Vdet-IC	5.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
4A116	-	XC6102A116ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A117	-	XC6102A117ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A118	-	XC6102A118ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A119	-	XC6102A119ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A120	-	XC6102A120ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A121	-	XC6102A121ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A122	-	XC6102A122ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A123	-	XC6102A123ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A124	-	XC6102A124ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A125	-	XC6102A125ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A126	-	XC6102A126ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A127	-	XC6102A127ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A128	-	XC6102A128ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A129	-	XC6102A129ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A130	-	XC6102A130ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A131	-	XC6102A131ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A132	-	XC6102A132ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A133	-	XC6102A133ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A134	-	XC6102A134ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A135	-	XC6102A135ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A136	-	XC6102A136ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A137	-	XC6102A137ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A138	-	XC6102A138ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A139	-	XC6102A139ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A140	-	XC6102A140ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A141	-	XC6102A141ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A142	-	XC6102A142ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A143	-	XC6102A143ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A144	-	XC6102A144ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A145	-	XC6102A145ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A146	-	XC6102A146ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A147	-	XC6102A147ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A148	-	XC6102A148ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A149	-	XC6102A149ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A150	-	XC6102A150ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A216	-	XC6102A216ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A217	-	XC6102A217ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A218	-	XC6102A218ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A219	-	XC6102A219ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A220	-	XC6102A220ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A221	-	XC6102A221ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A222	-	XC6102A222ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A223	-	XC6102A223ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A224	-	XC6102A224ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A225	-	XC6102A225ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A226	-	XC6102A226ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A227	-	XC6102A227ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A228	-	XC6102A228ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A229	-	XC6102A229ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A230	-	XC6102A230ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A231	-	XC6102A231ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A232	-	XC6102A232ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A233	-	XC6102A233ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A234	-	XC6102A234ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A235	-	XC6102A235ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A236	-	XC6102A236ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A237	-	XC6102A237ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A238	-	XC6102A238ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A239	-	XC6102A239ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A240	-	XC6102A240ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A241	-	XC6102A241ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A242	-	XC6102A242ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A243	-	XC6102A243ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A244	-	XC6102A244ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A245	-	XC6102A245ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A246	-	XC6102A246ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A247	-	XC6102A247ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A248	-	XC6102A248ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A249	-	XC6102A249ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4A250	-	XC6102A250ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A316	-	XC6102A316ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A317	-	XC6102A317ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A318	-	XC6102A318ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A319	-	XC6102A319ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A320	-	XC6102A320ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A321	-	XC6102A321ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A322	-	XC6102A322ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A323	-	XC6102A323ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A324	-	XC6102A324ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A325	-	XC6102A325ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A326	-	XC6102A326ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A327	-	XC6102A327ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A328	-	XC6102A328ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A329	-	XC6102A329ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A330	-	XC6102A330ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A331	-	XC6102A331ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A332	-	XC6102A332ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A333	-	XC6102A333ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A334	-	XC6102A334ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A335	-	XC6102A335ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A336	-	XC6102A336ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A337	-	XC6102A337ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A338	-	XC6102A338ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A339	-	XC6102A339ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A340	-	XC6102A340ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A341	-	XC6102A341ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A342	-	XC6102A342ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A343	-	XC6102A343ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A344	-	XC6102A344ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A345	-	XC6102A345ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A346	-	XC6102A346ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A347	-	XC6102A347ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A348	-	XC6102A348ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A349	-	XC6102A349ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A350	-	XC6102A350ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A416	-	XC6102A416ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A417	-	XC6102A417ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A418	-	XC6102A418ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A419	-	XC6102A419ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A420	-	XC6102A420ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A421	-	XC6102A421ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A422	-	XC6102A422ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A423	-	XC6102A423ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A424	-	XC6102A424ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A425	-	XC6102A425ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A426	-	XC6102A426ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A427	-	XC6102A427ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A428	-	XC6102A428ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A429	-	XC6102A429ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A430	-	XC6102A430ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A431	-	XC6102A431ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A432	-	XC6102A432ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A433	-	XC6102A433ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A434	-	XC6102A434ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A435	-	XC6102A435ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A436	-	XC6102A436ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A437	-	XC6102A437ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A438	-	XC6102A438ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A439	-	XC6102A439ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A440	-	XC6102A440ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A441	-	XC6102A441ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A442	-	XC6102A442ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A443	-	XC6102A443ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A444	-	XC6102A444ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A445	-	XC6102A445ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A446	-	XC6102A446ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A447	-	XC6102A447ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A448	-	XC6102A448ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A449	-	XC6102A449ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4A450	-	XC6102A450ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A516	-	XC6102A516ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A517	-	XC6102A517ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A518	-	XC6102A518ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A519	-	XC6102A519ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A520	-	XC6102A520ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A521	-	XC6102A521ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A522	-	XC6102A522ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A523	-	XC6102A523ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A524	-	XC6102A524ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A525	-	XC6102A525ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A526	-	XC6102A526ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A527	-	XC6102A527ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A528	-	XC6102A528ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A529	-	XC6102A529ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A530	-	XC6102A530ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A531	-	XC6102A531ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A532	-	XC6102A532ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A533	-	XC6102A533ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A534	-	XC6102A534ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A535	-	XC6102A535ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A536	-	XC6102A536ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A537	-	XC6102A537ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A538	-	XC6102A538ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A539	-	XC6102A539ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A540	-	XC6102A540ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A541	-	XC6102A541ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A542	-	XC6102A542ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A543	-	XC6102A543ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A544	-	XC6102A544ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A545	-	XC6102A545ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A546	-	XC6102A546ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A547	-	XC6102A547ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A548	-	XC6102A548ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A549	-	XC6102A549ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A550	-	XC6102A550ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A616	-	XC6102A616ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A617	-	XC6102A617ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A618	-	XC6102A618ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A619	-	XC6102A619ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A620	-	XC6102A620ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A621	-	XC6102A621ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A622	-	XC6102A622ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A623	-	XC6102A623ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A624	-	XC6102A624ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A625	-	XC6102A625ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A626	-	XC6102A626ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A627	-	XC6102A627ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A628	-	XC6102A628ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A629	-	XC6102A629ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A630	-	XC6102A630ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A631	-	XC6102A631ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A632	-	XC6102A632ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A633	-	XC6102A633ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A634	-	XC6102A634ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A635	-	XC6102A635ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A636	-	XC6102A636ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A637	-	XC6102A637ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A638	-	XC6102A638ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A639	-	XC6102A639ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A640	-	XC6102A640ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A641	-	XC6102A641ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A642	-	XC6102A642ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A643	-	XC6102A643ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A644	-	XC6102A644ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A645	-	XC6102A645ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A646	-	XC6102A646ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A647	-	XC6102A647ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A648	-	XC6102A648ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A649	-	XC6102A649ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4A650	-	XC6102A650ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
4A8	-	XC9235A08C0R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4A8	-	XC9235A08C4R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4A8	-	XC9235A08CER-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4A9	-	XC9235A09C0R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4A9	-	XC9235A09C4R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4A9	-	XC9235A09CER-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4AA	-	AP6233S-18NHFGU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AA	-	AP6233S-18NHFPU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
4AA	mg	AP6233S-18NHFGU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AA	mg	AP6233S-18NHFPU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
4AB	-	AP6233S-18NLFGU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AB	-	AP6233S-18NLFPU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
4AB	mg	AP6233S-18NLFGU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AB	mg	AP6233S-18NLFPU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
4AC	-	AP6233S-18NHNGU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AC	-	AP6233S-18NHNPU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
4AC	mg	AP6233S-18NHNGU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AC	mg	AP6233S-18NHNPU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
4AD	-	AP6233S-18NLNGU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AD	-	AP6233S-18NLNPU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
4AD	mg	AP6233S-18NLNGU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AD	mg	AP6233S-18NLNPU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
4AE	-	AP6233S-18UHFGU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AE	-	AP6233S-18UHFPU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4AE	mg	AP6233S-18UHFGU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AE	mg	AP6233S-18UHFPU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4AF	-	AP6233S-18ULFGU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AF	-	AP6233S-18ULFPU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4AF	mg	AP6233S-18ULFGU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AF	mg	AP6233S-18ULFPU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4AG	-	AP6233S-18UHNGU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AG	-	AP6233S-18UHNPU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4AG	mg	AP6233S-18UHNGU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AG	mg	AP6233S-18UHNPU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4AH	-	AP6233S-18ULNGU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AH	-	AP6233S-18ULNPU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4AH	mg	AP6233S-18ULNGU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AH	mg	AP6233S-18ULNPU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4AJ	-	AP6233S-18DHFGU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AJ	-	AP6233S-18DHFPU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4AJ	mg	AP6233S-18DHFGU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AJ	mg	AP6233S-18DHFPU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4AK	-	AP6233S-18DLFGU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AK	-	AP6233S-18DLFPU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4AK	mg	AP6233S-18DLFGU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AK	mg	AP6233S-18DLFPU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4AL	-	AP6233S-18DHNGU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AL	-	AP6233S-18DHNPU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4AL	-	XC9235A0LC0R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4AL	-	XC9235A0LC4R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4AL	-	XC9235A0LCER-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4AL	mg	AP6233S-18DHNGU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AL	mg	AP6233S-18DHNPU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4AM	-	AP6233S-18DLNGU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AM	-	AP6233S-18DLNPU	LVR-IC	LDO, 1.8V±2%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4AM	-	XC9235A0MC0R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4AM	-	XC9235A0MC4R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4AM	-	XC9235A0MCER-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4AM	mg	AP6233S-18DLNGU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4AM	mg	AP6233S-18DLNPU1	LVR-IC	LDO, 1.8V±1%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4AN	-	XC9140A2814R-G	DC-DC-IC	PWM step-up, 2.8V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
4AP	-	XC9140A4514R-G	DC-DC-IC	PWM step-up, 4.5V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
4AT	-	XC9140C2814R-G	DC-DC-IC	PWM step-up, 2.8V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
4AU	-	XC9140C4514R-G	DC-DC-IC	PWM step-up, 4.5V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
4B	-	R3117K321C	Vdet-IC	3.2V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4B	-	RP101K131D	LVR-IC	LDO, LN, 1.3V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4B	-	RP112K341D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
4B	-	RP173K341B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4B	-	XC6221D1917R	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor




SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4B	-	XC6223E2119R-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4B0	-	XC9235A10C0R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4B0	-	XC9235A10C4R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4B0	-	XC9235A10CER-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4B016	-	XC6107B016ER	Vdet-IC	1.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B017	-	XC6107B017ER	Vdet-IC	1.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B018	-	XC6107B018ER	Vdet-IC	1.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B019	-	XC6107B019ER	Vdet-IC	1.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B020	-	XC6107B020ER	Vdet-IC	2.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B021	-	XC6107B021ER	Vdet-IC	2.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B022	-	XC6107B022ER	Vdet-IC	2.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B023	-	XC6107B023ER	Vdet-IC	2.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B024	-	XC6107B024ER	Vdet-IC	2.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B025	-	XC6107B025ER	Vdet-IC	2.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B026	-	XC6107B026ER	Vdet-IC	2.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B027	-	XC6107B027ER	Vdet-IC	2.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B028	-	XC6107B028ER	Vdet-IC	2.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B029	-	XC6107B029ER	Vdet-IC	2.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B030	-	XC6107B030ER	Vdet-IC	3.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B031	-	XC6107B031ER	Vdet-IC	3.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B032	-	XC6107B032ER	Vdet-IC	3.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B033	-	XC6107B033ER	Vdet-IC	3.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B034	-	XC6107B034ER	Vdet-IC	3.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B035	-	XC6107B035ER	Vdet-IC	3.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B036	-	XC6107B036ER	Vdet-IC	3.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B037	-	XC6107B037ER	Vdet-IC	3.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B038	-	XC6107B038ER	Vdet-IC	3.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B039	-	XC6107B039ER	Vdet-IC	3.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B040	-	XC6107B040ER	Vdet-IC	4.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B041	-	XC6107B041ER	Vdet-IC	4.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B042	-	XC6107B042ER	Vdet-IC	4.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B043	-	XC6107B043ER	Vdet-IC	4.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B044	-	XC6107B044ER	Vdet-IC	4.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B045	-	XC6107B045ER	Vdet-IC	4.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B046	-	XC6107B046ER	Vdet-IC	4.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B047	-	XC6107B047ER	Vdet-IC	4.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B048	-	XC6107B048ER	Vdet-IC	4.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B049	-	XC6107B049ER	Vdet-IC	4.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B050	-	XC6107B050ER	Vdet-IC	5.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
4B1	-	XC9235A11C0R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4B1	-	XC9235A11C4R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4B1	-	XC9235A11CER-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4B2	-	XC9235A12C0R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4B2	-	XC9235A12C4R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4B2	-	XC9235A12CER-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4B216	-	XC6102B216ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B217	-	XC6102B217ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B218	-	XC6102B218ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B219	-	XC6102B219ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B220	-	XC6102B220ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B221	-	XC6102B221ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B222	-	XC6102B222ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B223	-	XC6102B223ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B224	-	XC6102B224ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B225	-	XC6102B225ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B226	-	XC6102B226ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B227	-	XC6102B227ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B228	-	XC6102B228ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B229	-	XC6102B229ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B230	-	XC6102B230ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B231	-	XC6102B231ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B232	-	XC6102B232ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B233	-	XC6102B233ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B234	-	XC6102B234ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B235	-	XC6102B235ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B236	-	XC6102B236ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B237	-	XC6102B237ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B238	-	XC6102B238ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B239	-	XC6102B239ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B240	-	XC6102B240ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4B241	-	XC6102B241ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B242	-	XC6102B242ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B243	-	XC6102B243ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B244	-	XC6102B244ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B245	-	XC6102B245ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B246	-	XC6102B246ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B247	-	XC6102B247ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B248	-	XC6102B248ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B249	-	XC6102B249ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B250	-	XC6102B250ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B3	-	XC9235A13C0R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4B3	-	XC9235A13C4R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4B3	-	XC9235A13CER-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4B316	-	XC6102B316ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B317	-	XC6102B317ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B318	-	XC6102B318ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B319	-	XC6102B319ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B320	-	XC6102B320ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B321	-	XC6102B321ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B322	-	XC6102B322ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B323	-	XC6102B323ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B324	-	XC6102B324ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B325	-	XC6102B325ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B326	-	XC6102B326ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B327	-	XC6102B327ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B328	-	XC6102B328ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B329	-	XC6102B329ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B330	-	XC6102B330ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B331	-	XC6102B331ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B332	-	XC6102B332ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B333	-	XC6102B333ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B334	-	XC6102B334ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B335	-	XC6102B335ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B336	-	XC6102B336ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B337	-	XC6102B337ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B338	-	XC6102B338ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B339	-	XC6102B339ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B340	-	XC6102B340ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B341	-	XC6102B341ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B342	-	XC6102B342ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B343	-	XC6102B343ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B344	-	XC6102B344ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B345	-	XC6102B345ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B346	-	XC6102B346ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B347	-	XC6102B347ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B348	-	XC6102B348ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B349	-	XC6102B349ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B350	-	XC6102B350ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B4	-	XC9235A14C0R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4B4	-	XC9235A14C4R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4B4	-	XC9235A14CER-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4B416	-	XC6102B416ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B417	-	XC6102B417ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B418	-	XC6102B418ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B419	-	XC6102B419ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B420	-	XC6102B420ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B421	-	XC6102B421ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B422	-	XC6102B422ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B423	-	XC6102B423ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B424	-	XC6102B424ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B425	-	XC6102B425ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B426	-	XC6102B426ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B427	-	XC6102B427ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B428	-	XC6102B428ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B429	-	XC6102B429ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B430	-	XC6102B430ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B431	-	XC6102B431ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B432	-	XC6102B432ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B433	-	XC6102B433ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B434	-	XC6102B434ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4B435	-	XC6102B435ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B436	-	XC6102B436ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B437	-	XC6102B437ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B438	-	XC6102B438ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B439	-	XC6102B439ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B440	-	XC6102B440ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B441	-	XC6102B441ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B442	-	XC6102B442ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B443	-	XC6102B443ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B444	-	XC6102B444ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B445	-	XC6102B445ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B446	-	XC6102B446ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B447	-	XC6102B447ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B448	-	XC6102B448ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B449	-	XC6102B449ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B450	-	XC6102B450ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B5	-	XC9235A15C0R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4B5	-	XC9235A15C4R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4B5	-	XC9235A15CER-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4B516	-	XC6102B516ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B517	-	XC6102B517ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B518	-	XC6102B518ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B519	-	XC6102B519ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B520	-	XC6102B520ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B521	-	XC6102B521ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B522	-	XC6102B522ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B523	-	XC6102B523ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B524	-	XC6102B524ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B525	-	XC6102B525ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B526	-	XC6102B526ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B527	-	XC6102B527ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B528	-	XC6102B528ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B529	-	XC6102B529ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B530	-	XC6102B530ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B531	-	XC6102B531ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B532	-	XC6102B532ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B533	-	XC6102B533ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B534	-	XC6102B534ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B535	-	XC6102B535ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B536	-	XC6102B536ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B537	-	XC6102B537ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B538	-	XC6102B538ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B539	-	XC6102B539ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B540	-	XC6102B540ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B541	-	XC6102B541ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B542	-	XC6102B542ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B543	-	XC6102B543ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B544	-	XC6102B544ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B545	-	XC6102B545ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B546	-	XC6102B546ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B547	-	XC6102B547ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B548	-	XC6102B548ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B549	-	XC6102B549ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B550	-	XC6102B550ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B6	-	XC9235A16C0R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4B6	-	XC9235A16C4R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4B6	-	XC9235A16CER-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4B616	-	XC6102B616ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B617	-	XC6102B617ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B618	-	XC6102B618ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B619	-	XC6102B619ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B620	-	XC6102B620ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B621	-	XC6102B621ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B622	-	XC6102B622ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B623	-	XC6102B623ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B624	-	XC6102B624ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B625	-	XC6102B625ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B626	-	XC6102B626ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B627	-	XC6102B627ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B628	-	XC6102B628ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4B629	-	XC6102B629ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B630	-	XC6102B630ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B631	-	XC6102B631ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B632	-	XC6102B632ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B633	-	XC6102B633ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B634	-	XC6102B634ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B635	-	XC6102B635ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B636	-	XC6102B636ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B637	-	XC6102B637ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B638	-	XC6102B638ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B639	-	XC6102B639ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B640	-	XC6102B640ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B641	-	XC6102B641ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B642	-	XC6102B642ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B643	-	XC6102B643ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B644	-	XC6102B644ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B645	-	XC6102B645ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B646	-	XC6102B646ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B647	-	XC6102B647ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B648	-	XC6102B648ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B649	-	XC6102B649ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B650	-	XC6102B650ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
4B7	-	XC9235A17C0R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4B7	-	XC9235A17C4R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4B7	-	XC9235A17CER-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4B8	-	XC9235A18C0R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4B8	-	XC9235A18C4R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4B8	-	XC9235A18CER-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4B9	-	XC9235A19C0R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4B9	-	XC9235A19C4R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4B9	-	XC9235A19CER-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4BA	-	XC9235A1AC0R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4BA	-	XC9235A1AC4R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4BA	-	XC9235A1ACER-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4BB	-	XC9235A1BC0R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4BB	-	XC9235A1BC4R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4BB	-	XC9235A1BCER-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4BC	-	XC9235A1CC0R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4BC	-	XC9235A1CC4R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4BC	-	XC9235A1CCER-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4BD	-	XC9235A1DC0R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4BD	-	XC9235A1DC4R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4BD	-	XC9235A1DCER-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4BE	-	XC9235A1EC0R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4BE	-	XC9235A1EC4R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4BE	-	XC9235A1ECER-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4BF	-	XC9235A1FC0R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4BF	-	XC9235A1FC4R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4BF	-	XC9235A1FCER-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4BH	-	XC9235A1HC0R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4BH	-	XC9235A1HC4R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4BH	-	XC9235A1HCER-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4BK	-	XC9235A1KC0R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4BK	-	XC9235A1KC4R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4BK	-	XC9235A1KCER-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4BL	-	XC9235A1LC0R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4BL	-	XC9235A1LC4R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4BL	-	XC9235A1LCER-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4BM	-	XC9235A1MC0R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4BM	-	XC9235A1MC4R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4BM	-	XC9235A1MCER-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4BN	-	XC9140A2914R-G	DC-DC-IC	PWM step-up, 2.9V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
4BP	-	XC9140A4614R-G	DC-DC-IC	PWM step-up, 4.6V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
4BT	-	XC9140C2914R-G	DC-DC-IC	PWM step-up, 2.9V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
4BU	-	XC9140C4614R-G	DC-DC-IC	PWM step-up, 4.6V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
4C	-	R3117K331C	Vdet-IC	3.3V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4C	-	RP101K151D	LVR-IC	LDO, LN, 1.5V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4C	-	RP112K351D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
4C	-	RP173K351B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4C	-	UNRF1A9	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=1k/10k	ML3	22ta	-	2b	Pan

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4C	-	XC6221D2017R	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4C	-	XC6223E2219R-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4C0	-	XC9235A20C0R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4C0	-	XC9235A20C4R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4C0	-	XC9235A20CER-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4C016	-	XC6107C016ER	Vdet-IC	1.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C017	-	XC6107C017ER	Vdet-IC	1.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C018	-	XC6107C018ER	Vdet-IC	1.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C019	-	XC6107C019ER	Vdet-IC	1.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C020	-	XC6107C020ER	Vdet-IC	2.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C021	-	XC6107C021ER	Vdet-IC	2.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C022	-	XC6107C022ER	Vdet-IC	2.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C023	-	XC6107C023ER	Vdet-IC	2.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C024	-	XC6107C024ER	Vdet-IC	2.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C025	-	XC6107C025ER	Vdet-IC	2.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C026	-	XC6107C026ER	Vdet-IC	2.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C027	-	XC6107C027ER	Vdet-IC	2.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C028	-	XC6107C028ER	Vdet-IC	2.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C029	-	XC6107C029ER	Vdet-IC	2.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C030	-	XC6107C030ER	Vdet-IC	3.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C031	-	XC6107C031ER	Vdet-IC	3.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C032	-	XC6107C032ER	Vdet-IC	3.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C033	-	XC6107C033ER	Vdet-IC	3.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C034	-	XC6107C034ER	Vdet-IC	3.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C035	-	XC6107C035ER	Vdet-IC	3.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C036	-	XC6107C036ER	Vdet-IC	3.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C037	-	XC6107C037ER	Vdet-IC	3.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C038	-	XC6107C038ER	Vdet-IC	3.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C039	-	XC6107C039ER	Vdet-IC	3.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C040	-	XC6107C040ER	Vdet-IC	4.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C041	-	XC6107C041ER	Vdet-IC	4.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C042	-	XC6107C042ER	Vdet-IC	4.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C043	-	XC6107C043ER	Vdet-IC	4.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C044	-	XC6107C044ER	Vdet-IC	4.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C045	-	XC6107C045ER	Vdet-IC	4.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C046	-	XC6107C046ER	Vdet-IC	4.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C047	-	XC6107C047ER	Vdet-IC	4.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C048	-	XC6107C048ER	Vdet-IC	4.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C049	-	XC6107C049ER	Vdet-IC	4.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C050	-	XC6107C050ER	Vdet-IC	5.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
4C1	-	XC9235A21C0R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4C1	-	XC9235A21C4R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4C1	-	XC9235A21CER-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4C2	-	XC9235A22C0R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4C2	-	XC9235A22C4R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4C2	-	XC9235A22CER-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4C216	-	XC6102C216ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C217	-	XC6102C217ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C218	-	XC6102C218ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C219	-	XC6102C219ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C220	-	XC6102C220ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C221	-	XC6102C221ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C222	-	XC6102C222ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C223	-	XC6102C223ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C224	-	XC6102C224ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C225	-	XC6102C225ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C226	-	XC6102C226ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C227	-	XC6102C227ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C228	-	XC6102C228ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C229	-	XC6102C229ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C230	-	XC6102C230ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C231	-	XC6102C231ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C232	-	XC6102C232ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C233	-	XC6102C233ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C234	-	XC6102C234ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C235	-	XC6102C235ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C236	-	XC6102C236ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C237	-	XC6102C237ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C238	-	XC6102C238ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C239	-	XC6102C239ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4C240	-	XC6102C240ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C241	-	XC6102C241ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C242	-	XC6102C242ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C243	-	XC6102C243ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C244	-	XC6102C244ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C245	-	XC6102C245ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C246	-	XC6102C246ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C247	-	XC6102C247ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C248	-	XC6102C248ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C249	-	XC6102C249ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C250	-	XC6102C250ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C3	-	XC9235A23C0R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4C3	-	XC9235A23C4R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4C3	-	XC9235A23CER-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4C316	-	XC6102C316ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C317	-	XC6102C317ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C318	-	XC6102C318ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C319	-	XC6102C319ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C320	-	XC6102C320ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C321	-	XC6102C321ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C322	-	XC6102C322ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C323	-	XC6102C323ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C324	-	XC6102C324ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C325	-	XC6102C325ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C326	-	XC6102C326ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C327	-	XC6102C327ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C328	-	XC6102C328ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C329	-	XC6102C329ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C330	-	XC6102C330ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C331	-	XC6102C331ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C332	-	XC6102C332ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C333	-	XC6102C333ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C334	-	XC6102C334ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C335	-	XC6102C335ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C336	-	XC6102C336ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C337	-	XC6102C337ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C338	-	XC6102C338ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C339	-	XC6102C339ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C340	-	XC6102C340ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C341	-	XC6102C341ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C342	-	XC6102C342ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C343	-	XC6102C343ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C344	-	XC6102C344ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C345	-	XC6102C345ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C346	-	XC6102C346ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C347	-	XC6102C347ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C348	-	XC6102C348ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C349	-	XC6102C349ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C350	-	XC6102C350ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C4	-	XC9235A24C0R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4C4	-	XC9235A24C4R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4C4	-	XC9235A24CER-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4C416	-	XC6102C416ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C417	-	XC6102C417ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C418	-	XC6102C418ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C419	-	XC6102C419ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C420	-	XC6102C420ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C421	-	XC6102C421ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C422	-	XC6102C422ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C423	-	XC6102C423ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C424	-	XC6102C424ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C425	-	XC6102C425ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C426	-	XC6102C426ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C427	-	XC6102C427ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C428	-	XC6102C428ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C429	-	XC6102C429ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C430	-	XC6102C430ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C431	-	XC6102C431ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C432	-	XC6102C432ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C433	-	XC6102C433ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4C434	-	XC6102C434ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C435	-	XC6102C435ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C436	-	XC6102C436ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C437	-	XC6102C437ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C438	-	XC6102C438ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C439	-	XC6102C439ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C440	-	XC6102C440ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C441	-	XC6102C441ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C442	-	XC6102C442ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C443	-	XC6102C443ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C444	-	XC6102C444ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C445	-	XC6102C445ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C446	-	XC6102C446ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C447	-	XC6102C447ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C448	-	XC6102C448ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C449	-	XC6102C449ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C450	-	XC6102C450ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C5	-	XC9235A25C0R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4C5	-	XC9235A25C4R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4C5	-	XC9235A25CER-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4C516	-	XC6102C516ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C517	-	XC6102C517ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C518	-	XC6102C518ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C519	-	XC6102C519ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C520	-	XC6102C520ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C521	-	XC6102C521ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C522	-	XC6102C522ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C523	-	XC6102C523ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C524	-	XC6102C524ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C525	-	XC6102C525ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C526	-	XC6102C526ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C527	-	XC6102C527ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C528	-	XC6102C528ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C529	-	XC6102C529ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C530	-	XC6102C530ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C531	-	XC6102C531ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C532	-	XC6102C532ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C533	-	XC6102C533ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C534	-	XC6102C534ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C535	-	XC6102C535ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C536	-	XC6102C536ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C537	-	XC6102C537ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C538	-	XC6102C538ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C539	-	XC6102C539ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C540	-	XC6102C540ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C541	-	XC6102C541ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C542	-	XC6102C542ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C543	-	XC6102C543ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C544	-	XC6102C544ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C545	-	XC6102C545ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C546	-	XC6102C546ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C547	-	XC6102C547ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C548	-	XC6102C548ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C549	-	XC6102C549ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C550	-	XC6102C550ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C6	-	XC9235A26C0R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4C6	-	XC9235A26C4R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4C6	-	XC9235A26CER-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4C616	-	XC6102C616ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C617	-	XC6102C617ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C618	-	XC6102C618ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C619	-	XC6102C619ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C620	-	XC6102C620ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C621	-	XC6102C621ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C622	-	XC6102C622ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C623	-	XC6102C623ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C624	-	XC6102C624ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C625	-	XC6102C625ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C626	-	XC6102C626ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C627	-	XC6102C627ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4C628	-	XC6102C628ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C629	-	XC6102C629ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C630	-	XC6102C630ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C631	-	XC6102C631ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C632	-	XC6102C632ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C633	-	XC6102C633ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C634	-	XC6102C634ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C635	-	XC6102C635ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C636	-	XC6102C636ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C637	-	XC6102C637ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C638	-	XC6102C638ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C639	-	XC6102C639ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C640	-	XC6102C640ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C641	-	XC6102C641ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C642	-	XC6102C642ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C643	-	XC6102C643ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C644	-	XC6102C644ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C645	-	XC6102C645ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C646	-	XC6102C646ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C647	-	XC6102C647ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C648	-	XC6102C648ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C649	-	XC6102C649ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C650	-	XC6102C650ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
4C7	-	XC9235A27C0R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4C7	-	XC9235A27C4R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4C7	-	XC9235A27CER-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4C8	-	XC9235A28C0R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4C8	-	XC9235A28C4R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4C8	-	XC9235A28CER-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4C9	-	XC9235A29C0R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4C9	-	XC9235A29C4R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4C9	-	XC9235A29CER-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4CA	-	XC9235A2AC0R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4CA	-	XC9235A2AC4R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4CA	-	XC9235A2ACER-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4CB	-	XC9235A2BC0R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4CB	-	XC9235A2BC4R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4CB	-	XC9235A2BCER-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4CC	-	XC9235A2CC0R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4CC	-	XC9235A2CC4R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4CC	-	XC9235A2CCER-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4CD	-	XC9235A2DC0R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4CD	-	XC9235A2DC4R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4CD	-	XC9235A2DCER-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4CE	-	XC9235A2EC0R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4CE	-	XC9235A2EC4R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4CE	-	XC9235A2ECER-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4CF	-	XC9235A2FC0R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4CF	-	XC9235A2FC4R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4CF	-	XC9235A2FCER-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4CH	-	XC9235A2HC0R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4CH	-	XC9235A2HC4R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4CH	-	XC9235A2HCER-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4CK	-	XC9235A2KC0R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4CK	-	XC9235A2KC4R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4CK	-	XC9235A2KCER-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4CL	-	XC9235A2LC0R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4CL	-	XC9235A2LC4R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4CL	-	XC9235A2LCER-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4CM	-	XC9235A2MC0R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4CM	-	XC9235A2MC4R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4CM	-	XC9235A2MCER-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4CN	-	XC9140A3014R-G	DC-DC-IC	PWM step-up, 3.0V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
4CP	-	XC9140A4714R-G	DC-DC-IC	PWM step-up, 4.7V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
4CT	-	XC9140C3014R-G	DC-DC-IC	PWM step-up, 3.0V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
4CU	-	XC9140C4714R-G	DC-DC-IC	PWM step-up, 4.7V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
4D	-	R3117K341C	Vdet-IC	3.4V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4D	-	RP101K181D	LVR-IC	LDO, LN, 1.8V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4D	-	RP112K361D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
4D	-	RP173K361B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4D	-	UNRF1AA	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=100k/100k	ML3	22ta	-	2b	Pan
4D	-	XC6221D2117R	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4D	-	XC6223E2319R-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4D0	-	XC9235A30C0R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4D0	-	XC9235A30C4R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4D0	-	XC9235A30CER-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4D016	-	XC6107D016ER	Vdet-IC	1.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D017	-	XC6107D017ER	Vdet-IC	1.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D018	-	XC6107D018ER	Vdet-IC	1.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D019	-	XC6107D019ER	Vdet-IC	1.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D020	-	XC6107D020ER	Vdet-IC	2.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D021	-	XC6107D021ER	Vdet-IC	2.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D022	-	XC6107D022ER	Vdet-IC	2.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D023	-	XC6107D023ER	Vdet-IC	2.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D024	-	XC6107D024ER	Vdet-IC	2.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D025	-	XC6107D025ER	Vdet-IC	2.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D026	-	XC6107D026ER	Vdet-IC	2.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D027	-	XC6107D027ER	Vdet-IC	2.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D028	-	XC6107D028ER	Vdet-IC	2.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D029	-	XC6107D029ER	Vdet-IC	2.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D030	-	XC6107D030ER	Vdet-IC	3.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D031	-	XC6107D031ER	Vdet-IC	3.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D032	-	XC6107D032ER	Vdet-IC	3.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D033	-	XC6107D033ER	Vdet-IC	3.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D034	-	XC6107D034ER	Vdet-IC	3.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D035	-	XC6107D035ER	Vdet-IC	3.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D036	-	XC6107D036ER	Vdet-IC	3.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D037	-	XC6107D037ER	Vdet-IC	3.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D038	-	XC6107D038ER	Vdet-IC	3.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D039	-	XC6107D039ER	Vdet-IC	3.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D040	-	XC6107D040ER	Vdet-IC	4.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D041	-	XC6107D041ER	Vdet-IC	4.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D042	-	XC6107D042ER	Vdet-IC	4.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D043	-	XC6107D043ER	Vdet-IC	4.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D044	-	XC6107D044ER	Vdet-IC	4.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D045	-	XC6107D045ER	Vdet-IC	4.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D046	-	XC6107D046ER	Vdet-IC	4.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D047	-	XC6107D047ER	Vdet-IC	4.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D048	-	XC6107D048ER	Vdet-IC	4.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D049	-	XC6107D049ER	Vdet-IC	4.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D050	-	XC6107D050ER	Vdet-IC	5.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
4D1	-	XC9235A31C0R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4D1	-	XC9235A31C4R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4D1	-	XC9235A31CER-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4D2	-	XC9235A32C0R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4D2	-	XC9235A32C4R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4D2	-	XC9235A32CER-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4D3	-	XC9235A33C0R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4D3	-	XC9235A33C4R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4D3	-	XC9235A33CER-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4D316	-	XC6102D316ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D317	-	XC6102D317ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D318	-	XC6102D318ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D319	-	XC6102D319ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D320	-	XC6102D320ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D321	-	XC6102D321ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D322	-	XC6102D322ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D323	-	XC6102D323ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D324	-	XC6102D324ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D325	-	XC6102D325ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D326	-	XC6102D326ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D327	-	XC6102D327ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D328	-	XC6102D328ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D329	-	XC6102D329ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D330	-	XC6102D330ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D331	-	XC6102D331ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D332	-	XC6102D332ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D333	-	XC6102D333ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D334	-	XC6102D334ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D335	-	XC6102D335ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4D336	-	XC6102D336ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D337	-	XC6102D337ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D338	-	XC6102D338ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D339	-	XC6102D339ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D340	-	XC6102D340ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D341	-	XC6102D341ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D342	-	XC6102D342ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D343	-	XC6102D343ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D344	-	XC6102D344ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D345	-	XC6102D345ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D346	-	XC6102D346ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D347	-	XC6102D347ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D348	-	XC6102D348ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D349	-	XC6102D349ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D350	-	XC6102D350ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D4	-	XC9235A34C0R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4D4	-	XC9235A34C4R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4D4	-	XC9235A34CER-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4D416	-	XC6102D416ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D417	-	XC6102D417ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D418	-	XC6102D418ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D419	-	XC6102D419ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D420	-	XC6102D420ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D421	-	XC6102D421ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D422	-	XC6102D422ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D423	-	XC6102D423ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D424	-	XC6102D424ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D425	-	XC6102D425ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D426	-	XC6102D426ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D427	-	XC6102D427ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D428	-	XC6102D428ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D429	-	XC6102D429ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D430	-	XC6102D430ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D431	-	XC6102D431ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D432	-	XC6102D432ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D433	-	XC6102D433ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D434	-	XC6102D434ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D435	-	XC6102D435ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D436	-	XC6102D436ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D437	-	XC6102D437ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D438	-	XC6102D438ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D439	-	XC6102D439ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D440	-	XC6102D440ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D441	-	XC6102D441ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D442	-	XC6102D442ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D443	-	XC6102D443ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D444	-	XC6102D444ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D445	-	XC6102D445ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D446	-	XC6102D446ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D447	-	XC6102D447ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D448	-	XC6102D448ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D449	-	XC6102D449ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D450	-	XC6102D450ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D5	-	XC9235A35C0R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4D5	-	XC9235A35C4R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4D5	-	XC9235A35CER-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4D516	-	XC6102D516ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D517	-	XC6102D517ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D518	-	XC6102D518ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D519	-	XC6102D519ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D520	-	XC6102D520ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D521	-	XC6102D521ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D522	-	XC6102D522ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D523	-	XC6102D523ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D524	-	XC6102D524ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D525	-	XC6102D525ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D526	-	XC6102D526ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D527	-	XC6102D527ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D528	-	XC6102D528ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D529	-	XC6102D529ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4D530	-	XC6102D530ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D531	-	XC6102D531ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D532	-	XC6102D532ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D533	-	XC6102D533ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D534	-	XC6102D534ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D535	-	XC6102D535ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D536	-	XC6102D536ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D537	-	XC6102D537ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D538	-	XC6102D538ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D539	-	XC6102D539ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D540	-	XC6102D540ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D541	-	XC6102D541ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D542	-	XC6102D542ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D543	-	XC6102D543ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D544	-	XC6102D544ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D545	-	XC6102D545ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D546	-	XC6102D546ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D547	-	XC6102D547ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D548	-	XC6102D548ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D549	-	XC6102D549ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D550	-	XC6102D550ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D6	-	XC9235A36C0R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4D6	-	XC9235A36C4R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4D6	-	XC9235A36CER-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4D616	-	XC6102D616ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D617	-	XC6102D617ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D618	-	XC6102D618ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D619	-	XC6102D619ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D620	-	XC6102D620ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D621	-	XC6102D621ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D622	-	XC6102D622ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D623	-	XC6102D623ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D624	-	XC6102D624ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D625	-	XC6102D625ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D626	-	XC6102D626ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D627	-	XC6102D627ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D628	-	XC6102D628ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D629	-	XC6102D629ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D630	-	XC6102D630ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D631	-	XC6102D631ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D632	-	XC6102D632ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D633	-	XC6102D633ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D634	-	XC6102D634ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D635	-	XC6102D635ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D636	-	XC6102D636ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D637	-	XC6102D637ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D638	-	XC6102D638ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D639	-	XC6102D639ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D640	-	XC6102D640ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D641	-	XC6102D641ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D642	-	XC6102D642ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D643	-	XC6102D643ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D644	-	XC6102D644ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D645	-	XC6102D645ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D646	-	XC6102D646ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D647	-	XC6102D647ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D648	-	XC6102D648ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D649	-	XC6102D649ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D650	-	XC6102D650ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
4D7	-	XC9235A37C0R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4D7	-	XC9235A37C4R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4D7	-	XC9235A37CER-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4D8	-	XC9235A38C0R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4D8	-	XC9235A38C4R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4D8	-	XC9235A38CER-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4D9	-	XC9235A39C0R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4D9	-	XC9235A39C4R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4D9	-	XC9235A39CER-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4DA	-	XC9235A3AC0R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4DA	-	XC9235A3AC4R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4DA	-	XC9235A3ACER-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4DB	-	XC9235A3BC0R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4DB	-	XC9235A3BC4R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4DB	-	XC9235A3BCER-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4DC	-	XC9235A3CC0R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4DC	-	XC9235A3CC4R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4DC	-	XC9235A3CCER-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4DD	-	XC9235A3DC0R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4DD	-	XC9235A3DC4R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4DD	-	XC9235A3DCER-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4DE	-	XC9235A3EC0R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4DE	-	XC9235A3EC4R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4DE	-	XC9235A3ECER-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4DF	-	XC9235A3FC0R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4DF	-	XC9235A3FC4R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4DF	-	XC9235A3FCER-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4DH	-	XC9235A3HC0R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4DH	-	XC9235A3HC4R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4DH	-	XC9235A3HCER-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4DK	-	XC9235A3KC0R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4DK	-	XC9235A3KC4R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4DK	-	XC9235A3KCER-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4DL	-	XC9235A3LC0R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4DL	-	XC9235A3LC4R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4DL	-	XC9235A3LCER-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4DM	-	XC9235A3MC0R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4DM	-	XC9235A3MC4R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4DM	-	XC9235A3MCER-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4DN	-	XC9140A3114R-G	DC-DC-IC	PWM step-up, 3.1V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
4DP	-	XC9140A4814R-G	DC-DC-IC	PWM step-up, 4.8V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
4DT	-	XC9140C3114R-G	DC-DC-IC	PWM step-up, 3.1V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
4DU	-	XC9140C4814R-G	DC-DC-IC	PWM step-up, 4.8V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
4E	-	R3117K351C	Vdet-IC	3.5V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4E	-	RP101K181D5	LVR-IC	LDO, LN, 1.85V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4E	-	RP112K371D	LVR-IC	LDO, 3.7V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
4E	-	RP173K371B	LVR-IC	LDO, 3.7V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4E	-	XC6221D2217R	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4E	-	XC6223E2419R-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4E0	-	XC9235A40C0R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4E0	-	XC9235A40C4R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4E0	-	XC9235A40CER-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4E016	-	XC6107E016ER	Vdet-IC	1.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E017	-	XC6107E017ER	Vdet-IC	1.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E018	-	XC6107E018ER	Vdet-IC	1.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E019	-	XC6107E019ER	Vdet-IC	1.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E020	-	XC6107E020ER	Vdet-IC	2.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E021	-	XC6107E021ER	Vdet-IC	2.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E022	-	XC6107E022ER	Vdet-IC	2.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E023	-	XC6107E023ER	Vdet-IC	2.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E024	-	XC6107E024ER	Vdet-IC	2.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E025	-	XC6107E025ER	Vdet-IC	2.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E026	-	XC6107E026ER	Vdet-IC	2.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E027	-	XC6107E027ER	Vdet-IC	2.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E028	-	XC6107E028ER	Vdet-IC	2.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E029	-	XC6107E029ER	Vdet-IC	2.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E030	-	XC6107E030ER	Vdet-IC	3.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E031	-	XC6107E031ER	Vdet-IC	3.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E032	-	XC6107E032ER	Vdet-IC	3.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E033	-	XC6107E033ER	Vdet-IC	3.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E034	-	XC6107E034ER	Vdet-IC	3.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E035	-	XC6107E035ER	Vdet-IC	3.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E036	-	XC6107E036ER	Vdet-IC	3.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E037	-	XC6107E037ER	Vdet-IC	3.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E038	-	XC6107E038ER	Vdet-IC	3.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E039	-	XC6107E039ER	Vdet-IC	3.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E040	-	XC6107E040ER	Vdet-IC	4.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E041	-	XC6107E041ER	Vdet-IC	4.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E042	-	XC6107E042ER	Vdet-IC	4.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E043	-	XC6107E043ER	Vdet-IC	4.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E044	-	XC6107E044ER	Vdet-IC	4.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4E045	-	XC6107E045ER	Vdet-IC	4.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E046	-	XC6107E046ER	Vdet-IC	4.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E047	-	XC6107E047ER	Vdet-IC	4.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E048	-	XC6107E048ER	Vdet-IC	4.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E049	-	XC6107E049ER	Vdet-IC	4.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E050	-	XC6107E050ER	Vdet-IC	5.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
4E416	-	XC6102E416ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E417	-	XC6102E417ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E418	-	XC6102E418ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E419	-	XC6102E419ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E420	-	XC6102E420ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E421	-	XC6102E421ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E422	-	XC6102E422ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E423	-	XC6102E423ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E424	-	XC6102E424ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E425	-	XC6102E425ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E426	-	XC6102E426ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E427	-	XC6102E427ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E428	-	XC6102E428ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E429	-	XC6102E429ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E430	-	XC6102E430ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E431	-	XC6102E431ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E432	-	XC6102E432ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E433	-	XC6102E433ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E434	-	XC6102E434ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E435	-	XC6102E435ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E436	-	XC6102E436ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E437	-	XC6102E437ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E438	-	XC6102E438ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E439	-	XC6102E439ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E440	-	XC6102E440ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E441	-	XC6102E441ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E442	-	XC6102E442ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E443	-	XC6102E443ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E444	-	XC6102E444ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E445	-	XC6102E445ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E446	-	XC6102E446ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E447	-	XC6102E447ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E448	-	XC6102E448ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E449	-	XC6102E449ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E450	-	XC6102E450ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E516	-	XC6102E516ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E517	-	XC6102E517ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E518	-	XC6102E518ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E519	-	XC6102E519ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E520	-	XC6102E520ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E521	-	XC6102E521ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E522	-	XC6102E522ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E523	-	XC6102E523ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E524	-	XC6102E524ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E525	-	XC6102E525ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E526	-	XC6102E526ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E527	-	XC6102E527ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E528	-	XC6102E528ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E529	-	XC6102E529ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E530	-	XC6102E530ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E531	-	XC6102E531ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E532	-	XC6102E532ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E533	-	XC6102E533ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E534	-	XC6102E534ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E535	-	XC6102E535ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E536	-	XC6102E536ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E537	-	XC6102E537ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E538	-	XC6102E538ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E539	-	XC6102E539ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E540	-	XC6102E540ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E541	-	XC6102E541ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E542	-	XC6102E542ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E543	-	XC6102E543ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E544	-	XC6102E544ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4E545	-	XC6102E545ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E546	-	XC6102E546ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E547	-	XC6102E547ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E548	-	XC6102E548ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E549	-	XC6102E549ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E550	-	XC6102E550ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E616	-	XC6102E616ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E617	-	XC6102E617ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E618	-	XC6102E618ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E619	-	XC6102E619ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E620	-	XC6102E620ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E621	-	XC6102E621ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E622	-	XC6102E622ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E623	-	XC6102E623ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E624	-	XC6102E624ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E625	-	XC6102E625ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E626	-	XC6102E626ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E627	-	XC6102E627ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E628	-	XC6102E628ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E629	-	XC6102E629ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E630	-	XC6102E630ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E631	-	XC6102E631ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E632	-	XC6102E632ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E633	-	XC6102E633ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E634	-	XC6102E634ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E635	-	XC6102E635ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E636	-	XC6102E636ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E637	-	XC6102E637ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E638	-	XC6102E638ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E639	-	XC6102E639ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E640	-	XC6102E640ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E641	-	XC6102E641ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E642	-	XC6102E642ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E643	-	XC6102E643ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E644	-	XC6102E644ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E645	-	XC6102E645ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E646	-	XC6102E646ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E647	-	XC6102E647ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E648	-	XC6102E648ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E649	-	XC6102E649ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4E650	-	XC6102E650ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
4EN	-	XC9140A3214R-G	DC-DC-IC	PWM step-up, 3.2V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
4EP	-	XC9140A4914R-G	DC-DC-IC	PWM step-up, 4.9V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
4ET	-	XC9140C3214R-G	DC-DC-IC	PWM step-up, 3.2V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
4EU	-	XC9140C4914R-G	DC-DC-IC	PWM step-up, 4.9V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
4F	-	R3117K361C	Vdet-IC	3.6V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4F	-	RP101K191D	LVR-IC	LDO, LN, 1.9V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4F	-	RP112K381D	LVR-IC	LDO, 3.8V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
4F	-	RP173K381B	LVR-IC	LDO, 3.8V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4F	-	XC6221D2317R	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4F	-	XC6223E2519R-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4F016	-	XC6107F016ER	Vdet-IC	1.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F017	-	XC6107F017ER	Vdet-IC	1.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F018	-	XC6107F018ER	Vdet-IC	1.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F019	-	XC6107F019ER	Vdet-IC	1.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F020	-	XC6107F020ER	Vdet-IC	2.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F021	-	XC6107F021ER	Vdet-IC	2.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F022	-	XC6107F022ER	Vdet-IC	2.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F023	-	XC6107F023ER	Vdet-IC	2.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F024	-	XC6107F024ER	Vdet-IC	2.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F025	-	XC6107F025ER	Vdet-IC	2.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F026	-	XC6107F026ER	Vdet-IC	2.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F027	-	XC6107F027ER	Vdet-IC	2.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F028	-	XC6107F028ER	Vdet-IC	2.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F029	-	XC6107F029ER	Vdet-IC	2.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F030	-	XC6107F030ER	Vdet-IC	3.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F031	-	XC6107F031ER	Vdet-IC	3.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F032	-	XC6107F032ER	Vdet-IC	3.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F033	-	XC6107F033ER	Vdet-IC	3.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F034	-	XC6107F034ER	Vdet-IC	3.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4F035	-	XC6107F035ER	Vdet-IC	3.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F036	-	XC6107F036ER	Vdet-IC	3.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F037	-	XC6107F037ER	Vdet-IC	3.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F038	-	XC6107F038ER	Vdet-IC	3.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F039	-	XC6107F039ER	Vdet-IC	3.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F040	-	XC6107F040ER	Vdet-IC	4.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F041	-	XC6107F041ER	Vdet-IC	4.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F042	-	XC6107F042ER	Vdet-IC	4.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F043	-	XC6107F043ER	Vdet-IC	4.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F044	-	XC6107F044ER	Vdet-IC	4.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F045	-	XC6107F045ER	Vdet-IC	4.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F046	-	XC6107F046ER	Vdet-IC	4.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F047	-	XC6107F047ER	Vdet-IC	4.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F048	-	XC6107F048ER	Vdet-IC	4.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F049	-	XC6107F049ER	Vdet-IC	4.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F050	-	XC6107F050ER	Vdet-IC	5.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
4F516	-	XC6102F516ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F517	-	XC6102F517ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F518	-	XC6102F518ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F519	-	XC6102F519ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F520	-	XC6102F520ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F521	-	XC6102F521ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F522	-	XC6102F522ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F523	-	XC6102F523ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F524	-	XC6102F524ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F525	-	XC6102F525ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F526	-	XC6102F526ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F527	-	XC6102F527ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F528	-	XC6102F528ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F529	-	XC6102F529ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F530	-	XC6102F530ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F531	-	XC6102F531ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F532	-	XC6102F532ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F533	-	XC6102F533ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F534	-	XC6102F534ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F535	-	XC6102F535ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F536	-	XC6102F536ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F537	-	XC6102F537ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F538	-	XC6102F538ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F539	-	XC6102F539ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F540	-	XC6102F540ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F541	-	XC6102F541ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F542	-	XC6102F542ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F543	-	XC6102F543ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F544	-	XC6102F544ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F545	-	XC6102F545ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F546	-	XC6102F546ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F547	-	XC6102F547ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F548	-	XC6102F548ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F549	-	XC6102F549ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F550	-	XC6102F550ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F616	-	XC6102F616ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F617	-	XC6102F617ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F618	-	XC6102F618ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F619	-	XC6102F619ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F620	-	XC6102F620ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F621	-	XC6102F621ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F622	-	XC6102F622ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F623	-	XC6102F623ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F624	-	XC6102F624ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F625	-	XC6102F625ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F626	-	XC6102F626ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F627	-	XC6102F627ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F628	-	XC6102F628ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F629	-	XC6102F629ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F630	-	XC6102F630ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F631	-	XC6102F631ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F632	-	XC6102F632ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F633	-	XC6102F633ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F634	-	XC6102F634ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4F635	-	XC6102F635ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F636	-	XC6102F636ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F637	-	XC6102F637ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F638	-	XC6102F638ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F639	-	XC6102F639ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F640	-	XC6102F640ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F641	-	XC6102F641ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F642	-	XC6102F642ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F643	-	XC6102F643ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F644	-	XC6102F644ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F645	-	XC6102F645ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F646	-	XC6102F646ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F647	-	XC6102F647ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F648	-	XC6102F648ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F649	-	XC6102F649ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F650	-	XC6102F650ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
4F8	-	XC9235A08D0R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4F8	-	XC9235A08D4R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4F8	-	XC9235A08DER-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4F8	-	XCL205A083AR-G	DC-DC-IC	PWM step-down, 3MHz, 0.8V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4F9	-	XC9235A09D0R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4F9	-	XC9235A09D4R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4F9	-	XC9235A09DER-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4F9	-	XCL205A093AR-G	DC-DC-IC	PWM step-down, 3MHz, 0.9V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4FL	-	XC9235A0LD0R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4FL	-	XC9235A0LD4R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4FL	-	XC9235A0LDER-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4FL	-	XCL205A0L3AR-G	DC-DC-IC	PWM step-down, 3MHz, 0.85V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4FM	-	XC9235A0MD0R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4FM	-	XC9235A0MD4R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4FM	-	XC9235A0MDER-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4FM	-	XCL205A0M3AR-G	DC-DC-IC	PWM step-down, 3MHz, 0.95V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4FN	-	XC9140A3314R-G	DC-DC-IC	PWM step-up, 3.3V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
4FP	-	XC9140A5014R-G	DC-DC-IC	PWM step-up, 5.0V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
4FT	-	XC9140C3314R-G	DC-DC-IC	PWM step-up, 3.3V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
4FU	-	XC9140C5014R-G	DC-DC-IC	PWM step-up, 5.0V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
4G	-	MIC5380-1.8/1.2YFT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.2V±2%, 150mA, +CE	MLF-6A	81g5	VR19	9x	Mcr
4G	-	R3117K371C	Vdet-IC	3.7V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4G	-	RP101K201D	LVR-IC	LDO, LN, 2.0V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4G	-	RP112K391D	LVR-IC	LDO, 3.9V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
4G	-	RP173K391B	LVR-IC	LDO, 3.9V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4GA	-	AP6233S-25NHFGU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GA	-	AP6233S-25NHFPU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
4GA	mg	AP6233S-25NHFGU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GA	mg	AP6233S-25NHFPU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
4GB	-	AP6233S-25NLFGU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GB	-	AP6233S-25NLFPU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
4GB	mg	AP6233S-25NLFGU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GB	mg	AP6233S-25NLFPU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
4GC	-	AP6233S-25NHNGU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GC	-	AP6233S-25NHNPU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
4GC	mg	AP6233S-25NHNGU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GC	mg	AP6233S-25NHNPU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
4GD	-	AP6233S-25NLNGU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GD	-	AP6233S-25NLNPU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
4GD	mg	AP6233S-25NLNGU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GD	mg	AP6233S-25NLNPU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
4GE	-	AP6233S-25UHFGU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GE	-	AP6233S-25UHFPU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4GE	mg	AP6233S-25UHFGU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GE	mg	AP6233S-25UHFPU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4GF	-	AP6233S-25ULFGU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GF	-	AP6233S-25ULFPU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4GF	mg	AP6233S-25ULFGU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GF	mg	AP6233S-25ULFPU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4GG	-	AP6233S-25UHNGU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GG	-	AP6233S-25UHNPU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4GG	mg	AP6233S-25UHNGU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GG	mg	AP6233S-25UHNPU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4GH	-	AP6233S-25ULNGU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4GH	-	AP6233S-25ULNPU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4GH	mg	AP6233S-25ULNGU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GH	mg	AP6233S-25ULNPU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4GJ	-	AP6233S-25DHFGU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GJ	-	AP6233S-25DHFPU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4GJ	mg	AP6233S-25DHFGU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GJ	mg	AP6233S-25DHFPU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4GK	-	AP6233S-25DLFGU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GK	-	AP6233S-25DLFPU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4GK	mg	AP6233S-25DLFGU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GK	mg	AP6233S-25DLFPU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4GL	-	AP6233S-25DHNGU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GL	-	AP6233S-25DHNPU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4GL	mg	AP6233S-25DHNGU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GL	mg	AP6233S-25DHNPU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4GM	-	AP6233S-25DLNGU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GM	-	AP6233S-25DLNPU	LVR-IC	LDO, 2.5V±2%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4GM	mg	AP6233S-25DLNGU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4GM	mg	AP6233S-25DLNPU1	LVR-IC	LDO, 2.5V±1%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4H	-	R3117K381C	Vdet-IC	3.8V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4H	-	RP101K251D	LVR-IC	LDO, LN, 2.5V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4H	-	RP112K401D	LVR-IC	LDO, 4.0V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
4H	-	RP173K401B	LVR-IC	LDO, 4.0V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4H	-	XC6221D2417R	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4H	-	XC6223E2619R-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4H0	-	XC9235A10D0R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4H0	-	XC9235A10D4R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4H0	-	XC9235A10DER-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4H0	-	XCL205A103AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.0V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4H016	-	XC6107H016ER	Vdet-IC	1.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H017	-	XC6107H017ER	Vdet-IC	1.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H018	-	XC6107H018ER	Vdet-IC	1.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H019	-	XC6107H019ER	Vdet-IC	1.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H020	-	XC6107H020ER	Vdet-IC	2.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H021	-	XC6107H021ER	Vdet-IC	2.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H022	-	XC6107H022ER	Vdet-IC	2.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H023	-	XC6107H023ER	Vdet-IC	2.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H024	-	XC6107H024ER	Vdet-IC	2.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H025	-	XC6107H025ER	Vdet-IC	2.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H026	-	XC6107H026ER	Vdet-IC	2.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H027	-	XC6107H027ER	Vdet-IC	2.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H028	-	XC6107H028ER	Vdet-IC	2.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H029	-	XC6107H029ER	Vdet-IC	2.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H030	-	XC6107H030ER	Vdet-IC	3.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H031	-	XC6107H031ER	Vdet-IC	3.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H032	-	XC6107H032ER	Vdet-IC	3.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H033	-	XC6107H033ER	Vdet-IC	3.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H034	-	XC6107H034ER	Vdet-IC	3.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H035	-	XC6107H035ER	Vdet-IC	3.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H036	-	XC6107H036ER	Vdet-IC	3.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H037	-	XC6107H037ER	Vdet-IC	3.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H038	-	XC6107H038ER	Vdet-IC	3.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H039	-	XC6107H039ER	Vdet-IC	3.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H040	-	XC6107H040ER	Vdet-IC	4.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H041	-	XC6107H041ER	Vdet-IC	4.1V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H042	-	XC6107H042ER	Vdet-IC	4.2V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H043	-	XC6107H043ER	Vdet-IC	4.3V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H044	-	XC6107H044ER	Vdet-IC	4.4V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H045	-	XC6107H045ER	Vdet-IC	4.5V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H046	-	XC6107H046ER	Vdet-IC	4.6V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H047	-	XC6107H047ER	Vdet-IC	4.7V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H048	-	XC6107H048ER	Vdet-IC	4.8V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H049	-	XC6107H049ER	Vdet-IC	4.9V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H050	-	XC6107H050ER	Vdet-IC	5.0V±2%, Hst, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
4H1	-	XC9235A11D0R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4H1	-	XC9235A11D4R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4H1	-	XC9235A11DER-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4H1	-	XCL205A113AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.1V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4H2	-	XC9235A12D0R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4H2	-	XC9235A12D4R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4H2	-	XC9235A12DER-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4H2	-	XCL205A123AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.2V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4H3	-	XC9235A13D0R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4H3	-	XC9235A13D4R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4H3	-	XC9235A13DER-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4H3	-	XCL205A133AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.3V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4H4	-	XC9235A14D0R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4H4	-	XC9235A14D4R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4H4	-	XC9235A14DER-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4H4	-	XCL205A143AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.4V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4H5	-	XC9235A15D0R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4H5	-	XC9235A15D4R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4H5	-	XC9235A15DER-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4H5	-	XCL205A153AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.5V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4H6	-	XC9235A16D0R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4H6	-	XC9235A16D4R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4H6	-	XC9235A16DER-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4H6	-	XCL205A163AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.6V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4H616	-	XC6102H616ER	Vdet-IC	1.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H617	-	XC6102H617ER	Vdet-IC	1.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H618	-	XC6102H618ER	Vdet-IC	1.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H619	-	XC6102H619ER	Vdet-IC	1.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H620	-	XC6102H620ER	Vdet-IC	2.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H621	-	XC6102H621ER	Vdet-IC	2.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H622	-	XC6102H622ER	Vdet-IC	2.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H623	-	XC6102H623ER	Vdet-IC	2.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H624	-	XC6102H624ER	Vdet-IC	2.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H625	-	XC6102H625ER	Vdet-IC	2.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H626	-	XC6102H626ER	Vdet-IC	2.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H627	-	XC6102H627ER	Vdet-IC	2.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H628	-	XC6102H628ER	Vdet-IC	2.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H629	-	XC6102H629ER	Vdet-IC	2.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H630	-	XC6102H630ER	Vdet-IC	3.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H631	-	XC6102H631ER	Vdet-IC	3.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H632	-	XC6102H632ER	Vdet-IC	3.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H633	-	XC6102H633ER	Vdet-IC	3.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H634	-	XC6102H634ER	Vdet-IC	3.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H635	-	XC6102H635ER	Vdet-IC	3.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H636	-	XC6102H636ER	Vdet-IC	3.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H637	-	XC6102H637ER	Vdet-IC	3.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H638	-	XC6102H638ER	Vdet-IC	3.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H639	-	XC6102H639ER	Vdet-IC	3.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H640	-	XC6102H640ER	Vdet-IC	4.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H641	-	XC6102H641ER	Vdet-IC	4.1V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H642	-	XC6102H642ER	Vdet-IC	4.2V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H643	-	XC6102H643ER	Vdet-IC	4.3V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H644	-	XC6102H644ER	Vdet-IC	4.4V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H645	-	XC6102H645ER	Vdet-IC	4.5V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H646	-	XC6102H646ER	Vdet-IC	4.6V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H647	-	XC6102H647ER	Vdet-IC	4.7V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H648	-	XC6102H648ER	Vdet-IC	4.8V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H649	-	XC6102H649ER	Vdet-IC	4.9V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H650	-	XC6102H650ER	Vdet-IC	5.0V±2%, Hst, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
4H7	-	XC9235A17D0R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4H7	-	XC9235A17D4R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4H7	-	XC9235A17DER-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4H7	-	XCL205A173AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.7V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4H8	-	XC9235A18D0R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4H8	-	XC9235A18D4R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4H8	-	XC9235A18DER-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4H8	-	XCL205A183AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.8V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4H9	-	XC9235A19D0R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4H9	-	XC9235A19D4R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4H9	-	XC9235A19DER-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4H9	-	XCL205A193AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.9V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4HA	-	XC9235A1AD0R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4HA	-	XC9235A1AD4R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4HA	-	XC9235A1ADER-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4HA	-	XCL205A1A3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.05V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4HB	-	XC9235A1BD0R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4HB	-	XC9235A1BD4R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4HB	-	XC9235A1BDER-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4HB	-	XCL205A1B3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.15V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4HC	-	XC9235A1CD0R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4HC	-	XC9235A1CD4R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4HC	-	XC9235A1CDER-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4HC	-	XCL205A1C3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.25V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4HD	-	XC9235A1DD0R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4HD	-	XC9235A1DD4R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4HD	-	XC9235A1DDER-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4HD	-	XCL205A1D3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.35V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4HE	-	XC9235A1ED0R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4HE	-	XC9235A1ED4R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4HE	-	XC9235A1EDER-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4HE	-	XCL205A1E3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.45V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4HF	-	XC9235A1FD0R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4HF	-	XC9235A1FD4R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4HF	-	XC9235A1FDER-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4HF	-	XCL205A1F3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.55V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4HH	-	XC9235A1HD0R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4HH	-	XC9235A1HD4R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4HH	-	XC9235A1HDER-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4HH	-	XCL205A1H3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.65V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4HK	-	XC9235A1KD0R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4HK	-	XC9235A1KD4R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4HK	-	XC9235A1KDER-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4HK	-	XCL205A1K3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.75V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4HL	-	XC9235A1LD0R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4HL	-	XC9235A1LD4R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4HL	-	XC9235A1LDER-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4HL	-	XCL205A1L3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.85V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4HM	-	XC9235A1MD0R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4HM	-	XC9235A1MD4R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4HM	-	XC9235A1MDER-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4HM	-	XCL205A1M3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.95V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4HN	-	XC9140A3414R-G	DC-DC-IC	PWM step-up, 3.4V±2%, 100mA, +CE	USP-6EL	56g8	DC19a	9a	Tor
4HT	-	XC9140C3414R-G	DC-DC-IC	PWM step-up, 3.4V±2%, 100mA, +CE, CL	USP-6EL	56g8	DC19a	9a	Tor
4J	-	R3117K391C	Vdet-IC	3.9V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4J	-	RP101K261D	LVR-IC	LDO, LN, 2.6V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4J	-	RP112K411D	LVR-IC	LDO, 4.1V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
4J	-	RP173K411B	LVR-IC	LDO, 4.1V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4K	-	R3117K401C	Vdet-IC	4.0V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4K	-	RP101K271D	LVR-IC	LDO, LN, 2.7V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4K	-	RP112K421D	LVR-IC	LDO, 4.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
4K	-	RP173K421B	LVR-IC	LDO, 4.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4K	-	UNRF1AF	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=4.7k/10k	ML3	22ta	-	2b	Pan
4K	-	XC6221D2517R	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4K	-	XC6223E2719R-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4K0	-	XC9235A20D0R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4K0	-	XC9235A20D4R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4K0	-	XC9235A20DER-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4K0	-	XCL205A203AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.0V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4K1	-	XC9235A21D0R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4K1	-	XC9235A21D4R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4K1	-	XC9235A21DER-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4K1	-	XCL205A213AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.1V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4K2	-	XC9235A22D0R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4K2	-	XC9235A22D4R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4K2	-	XC9235A22DER-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4K2	-	XCL205A223AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.2V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4K3	-	XC9235A23D0R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4K3	-	XC9235A23D4R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4K3	-	XC9235A23DER-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4K3	-	XCL205A233AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.3V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4K4	-	XC9235A24D0R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4K4	-	XC9235A24D4R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4K4	-	XC9235A24DER-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4K4	-	XCL205A243AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.4V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4K5	-	XC9235A25D0R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4K5	-	XC9235A25D4R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4K5	-	XC9235A25DER-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4K5	-	XCL205A253AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.5V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4K6	-	XC9235A26D0R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4K6	-	XC9235A26D4R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4K6	-	XC9235A26DER-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4K6	-	XCL205A263AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.6V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4K7	-	XC9235A27D0R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4K7	-	XC9235A27D4R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4K7	-	XC9235A27DER-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4K7	-	XCL205A273AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.7V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4K8	-	XC9235A28D0R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4K8	-	XC9235A28D4R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4K8	-	XC9235A28DER-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4K8	-	XCL205A283AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.8V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4K9	-	XC9235A29D0R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4K9	-	XC9235A29D4R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4K9	-	XC9235A29DER-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4K9	-	XCL205A293AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.9V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4KA	-	XC9235A2AD0R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4KA	-	XC9235A2AD4R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4KA	-	XC9235A2ADER-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4KA	-	XCL205A2A3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.05V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4KB	-	XC9235A2BD0R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4KB	-	XC9235A2BD4R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4KB	-	XC9235A2BDER-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4KB	-	XCL205A2B3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.15V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4KC	-	XC9235A2CD0R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4KC	-	XC9235A2CD4R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4KC	-	XC9235A2CDER-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4KC	-	XCL205A2C3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.25V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4KD	-	XC9235A2DD0R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4KD	-	XC9235A2DD4R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4KD	-	XC9235A2DDER-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4KD	-	XCL205A2D3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.35V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4KE	-	XC9235A2ED0R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4KE	-	XC9235A2ED4R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4KE	-	XC9235A2EDER-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4KE	-	XCL205A2E3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.45V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4KF	-	XC9235A2FD0R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4KF	-	XC9235A2FD4R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4KF	-	XC9235A2FDER-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4KF	-	XCL205A2F3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.55V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4KH	-	XC9235A2HD0R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4KH	-	XC9235A2HD4R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4KH	-	XC9235A2HDER-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4KH	-	XCL205A2H3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.65V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4KK	-	XC9235A2KD0R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4KK	-	XC9235A2KD4R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4KK	-	XC9235A2KDER-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4KK	-	XCL205A2K3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.75V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4KL	-	XC9235A2LD0R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4KL	-	XC9235A2LD4R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4KL	-	XC9235A2LDER-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4KL	-	XCL205A2L3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.85V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4KM	-	XC9235A2MD0R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4KM	-	XC9235A2MD4R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4KM	-	XC9235A2MDER-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4KM	-	XCL205A2M3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.95V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4L	-	R3117K411C	Vdet-IC	4.1V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4L	-	RP101K281D	LVR-IC	LDO, LN, 2.8V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4L	-	RP112K431D	LVR-IC	LDO, 4.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
4L	-	RP173K431B	LVR-IC	LDO, 4.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4L	-	UNRF1AH	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=2.2k/10k	ML3	22ta	-	2b	Pan
4L	-	XC6221D2617R	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4L	-	XC6223E2819R-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4L0	-	XC9235A30D0R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4L0	-	XC9235A30D4R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4L0	-	XC9235A30DER-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4L0	-	XCL205A303AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.0V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4L1	-	XC9235A31D0R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4L1	-	XC9235A31D4R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4L1	-	XC9235A31DER-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4L1	-	XCL205A313AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.1V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4L2	-	XC9235A32D0R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4L2	-	XC9235A32D4R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4L2	-	XC9235A32DER-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4L2	-	XCL205A323AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.2V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4L3	-	XC9235A33D0R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4L3	-	XC9235A33D4R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4L3	-	XC9235A33DER-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4L3	-	XCL205A333AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.3V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4L4	-	XC9235A34D0R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4L4	-	XC9235A34D4R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4L4	-	XC9235A34DER-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4L4	-	XCL205A343AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.4V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4L5	-	XC9235A35D0R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4L5	-	XC9235A35D4R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4L5	-	XC9235A35DER-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4L5	-	XCL205A353AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.5V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4L6	-	XC9235A36D0R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4L6	-	XC9235A36D4R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4L6	-	XC9235A36DER-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4L6	-	XCL205A363AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.6V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4L7	-	XC9235A37D0R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4L7	-	XC9235A37D4R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4L7	-	XC9235A37DER-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4L7	-	XCL205A373AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.7V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4L8	-	XC9235A38D0R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4L8	-	XC9235A38D4R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4L8	-	XC9235A38DER-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4L8	-	XCL205A383AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.8V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4L9	-	XC9235A39D0R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4L9	-	XC9235A39D4R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4L9	-	XC9235A39DER-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4L9	-	XCL205A393AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.9V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4LA	-	AP6233S-285NHFGU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LA	-	AP6233S-285NHFPU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
4LA	-	XC9235A3AD0R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4LA	-	XC9235A3AD4R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4LA	-	XC9235A3ADER-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4LA	-	XCL205A3A3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.05V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4LA	mg	AP6233S-285NHFGU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LA	mg	AP6233S-285NHFPU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
4LB	-	AP6233S-285NLFGU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LB	-	AP6233S-285NLFPU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
4LB	-	XC9235A3BD0R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4LB	-	XC9235A3BD4R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4LB	-	XC9235A3BDER-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4LB	-	XCL205A3B3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.15V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4LB	mg	AP6233S-285NLFGU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LB	mg	AP6233S-285NLFPU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
4LC	-	AP6233S-285NHNGU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LC	-	AP6233S-285NHNPU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
4LC	-	XC9235A3CD0R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4LC	-	XC9235A3CD4R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4LC	-	XC9235A3CDER-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4LC	-	XCL205A3C3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.25V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4LC	mg	AP6233S-285NHNGU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LC	mg	AP6233S-285NHNPU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
4LD	-	AP6233S-285NLNGU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LD	-	AP6233S-285NLNPU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
4LD	-	XC9235A3DD0R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4LD	-	XC9235A3DD4R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4LD	-	XC9235A3DDER-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4LD	-	XCL205A3D3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.35V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4LD	mg	AP6233S-285NLNGU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LD	mg	AP6233S-285NLNPU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
4LE	-	AP6233S-285UHFGU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LE	-	AP6233S-285UHFPU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4LE	-	XC9235A3ED0R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4LE	-	XC9235A3ED4R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4LE	-	XC9235A3EDER-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4LE	-	XCL205A3E3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.45V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4LE	mg	AP6233S-285UHFGU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LE	mg	AP6233S-285UHFPU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4LF	-	AP6233S-285ULFGU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LF	-	AP6233S-285ULFPU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4LF	-	XC9235A3FD0R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4LF	-	XC9235A3FD4R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4LF	-	XC9235A3FDER-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4LF	-	XCL205A3F3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.55V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4LF	mg	AP6233S-285ULFGU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LF	mg	AP6233S-285ULFPU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4LG	-	AP6233S-285UHNGU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LG	-	AP6233S-285UHNPU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4LG	mg	AP6233S-285UHNGU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LG	mg	AP6233S-285UHNPU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4LH	-	AP6233S-285ULNGU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LH	-	AP6233S-285ULNPU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4LH	-	XC9235A3HD0R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4LH	-	XC9235A3HD4R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4LH	-	XC9235A3HDER-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4LH	-	XCL205A3H3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.65V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4LH	mg	AP6233S-285ULNGU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LH	mg	AP6233S-285ULNPU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4LJ	-	AP6233S-285DHFGU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LJ	-	AP6233S-285DHFPU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4LJ	mg	AP6233S-285DHFGU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LJ	mg	AP6233S-285DHFPU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4LK	-	AP6233S-285DLFGU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LK	-	AP6233S-285DLFPU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4LK	-	XC9235A3KD0R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4LK	-	XC9235A3KD4R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4LK	-	XC9235A3KDER-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4LK	-	XCL205A3K3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.75V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4LK	mg	AP6233S-285DLFGU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LK	mg	AP6233S-285DLFPU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4LL	-	AP6233S-285DHNGU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LL	-	AP6233S-285DHNPU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4LL	-	XC9235A3LD0R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4LL	-	XC9235A3LD4R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4LL	-	XC9235A3LDER-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4LL	-	XCL205A3L3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.85V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4LL	mg	AP6233S-285DHNGU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LL	mg	AP6233S-285DHNPU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4LM	-	AP6233S-285DLNGU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LM	-	AP6233S-285DLNPU	LVR-IC	LDO, 2.85V±2%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4LM	-	XC9235A3MD0R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4LM	-	XC9235A3MD4R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4LM	-	XC9235A3MDER-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4LM	-	XCL205A3M3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.95V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4LM	mg	AP6233S-285DLNGU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4LM	mg	AP6233S-285DLNPU1	LVR-IC	LDO, 2.85V±1%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4M	-	MIC5380-2.8/1.2YFT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.2V±2%, 150mA, +CE	MLF-6A	81g5	VR19	9x	Mcr
4M	-	R3117K421C	Vdet-IC	4.2V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4M	-	RP101K281D5	LVR-IC	LDO, LN, 2.85V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4M	-	RP112K441D	LVR-IC	LDO, 4.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
4M	-	RP173K441B	LVR-IC	LDO, 4.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4M	-	XC6221D2717R	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4M	-	XC6223E2919R-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4M0	-	XC9235A40D0R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
4M0	-	XC9235A40D4R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
4M0	-	XC9235A40DER-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
4M0	-	XCL205A403AR-G	DC-DC-IC	PWM step-down, 3MHz, 4.0V±2%, 600mA, -CE	CL-2025	67dc7	DC9	9a	Tor
4MA	-	AP6233S-30NHFGU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MA	-	AP6233S-30NHFPU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
4MA	mg	AP6233S-30NHFGU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MA	mg	AP6233S-30NHFPU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
4MB	-	AP6233S-30NLFGU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MB	-	AP6233S-30NLFPU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4MB	mg	AP6233S-30NLFGU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MB	mg	AP6233S-30NLFPU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
4MC	-	AP6233S-30NHNGU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MC	-	AP6233S-30NHNPU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
4MC	mg	AP6233S-30NHNGU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MC	mg	AP6233S-30NHNPU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
4MD	-	AP6233S-30NLNGU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MD	-	AP6233S-30NLNPU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
4MD	mg	AP6233S-30NLNGU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MD	mg	AP6233S-30NLNPU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
4ME	-	AP6233S-30UHFGU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ME	-	AP6233S-30UHFPU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4ME	mg	AP6233S-30UHFGU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ME	mg	AP6233S-30UHFPU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4MF	-	AP6233S-30ULFGU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MF	-	AP6233S-30ULFPU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4MF	mg	AP6233S-30ULFGU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MF	mg	AP6233S-30ULFPU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4MG	-	AP6233S-30UHNGU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MG	-	AP6233S-30UHNPU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4MG	mg	AP6233S-30UHNGU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MG	mg	AP6233S-30UHNPU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4MH	-	AP6233S-30ULNGU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MH	-	AP6233S-30ULNPU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4MH	mg	AP6233S-30ULNGU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MH	mg	AP6233S-30ULNPU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4MJ	-	AP6233S-30DHFGU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MJ	-	AP6233S-30DHFPU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4MJ	mg	AP6233S-30DHFGU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MJ	mg	AP6233S-30DHFPU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4MK	-	AP6233S-30DLFGU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MK	-	AP6233S-30DLFPU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4MK	mg	AP6233S-30DLFGU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MK	mg	AP6233S-30DLFPU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4ML	-	AP6233S-30DHNGU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ML	-	AP6233S-30DHNPU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4ML	mg	AP6233S-30DHNGU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ML	mg	AP6233S-30DHNPU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4MM	-	AP6233S-30DLNGU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MM	-	AP6233S-30DLNPU	LVR-IC	LDO, 3.0V±2%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4MM	mg	AP6233S-30DLNGU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4MM	mg	AP6233S-30DLNPU1	LVR-IC	LDO, 3.0V±1%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4N	-	R3117K431C	Vdet-IC	4.3V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4N	-	RP101K291D	LVR-IC	LDO, LN, 2.9V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4N	-	RP112K451D	LVR-IC	LDO, 4.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
4N	-	RP173K451B	LVR-IC	LDO, 4.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4N	-	XC6221D2817R	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4N	-	XC6223E3019R-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4N8	-	XC9235E08C0R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4N8	-	XC9235E08C4R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4N8	-	XC9235E08CER-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4N9	-	XC9235E09C0R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4N9	-	XC9235E09C4R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4N9	-	XC9235E09CER-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4NA	-	AP6233S-31NHFGU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NA	-	AP6233S-31NHFPU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
4NA	mg	AP6233S-31NHFGU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NA	mg	AP6233S-31NHFPU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
4NB	-	AP6233S-31NLFGU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NB	-	AP6233S-31NLFPU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
4NB	mg	AP6233S-31NLFGU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NB	mg	AP6233S-31NLFPU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
4NC	-	AP6233S-31NHNGU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NC	-	AP6233S-31NHNPU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
4NC	mg	AP6233S-31NHNGU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NC	mg	AP6233S-31NHNPU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
4ND	-	AP6233S-31NLNGU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ND	-	AP6233S-31NLNPU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
4ND	mg	AP6233S-31NLNGU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ND	mg	AP6233S-31NLNPU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4NE	-	AP6233S-31UHFGU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NE	-	AP6233S-31UHFPU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4NE	mg	AP6233S-31UHFGU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NE	mg	AP6233S-31UHFPU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4NF	-	AP6233S-31ULFGU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NF	-	AP6233S-31ULFPU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4NF	mg	AP6233S-31ULFGU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NF	mg	AP6233S-31ULFPU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4NG	-	AP6233S-31UHNGU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NG	-	AP6233S-31UHNPU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4NG	mg	AP6233S-31UHNGU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NG	mg	AP6233S-31UHNPU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4NH	-	AP6233S-31ULNGU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NH	-	AP6233S-31ULNPU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4NH	mg	AP6233S-31ULNGU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NH	mg	AP6233S-31ULNPU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4NJ	-	AP6233S-31DHFGU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NJ	-	AP6233S-31DHFPU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4NJ	mg	AP6233S-31DHFGU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NJ	mg	AP6233S-31DHFPU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4NK	-	AP6233S-31DLFGU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NK	-	AP6233S-31DLFPU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4NK	mg	AP6233S-31DLFGU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NK	mg	AP6233S-31DLFPU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4NL	-	AP6233S-31DHNGU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NL	-	AP6233S-31DHNPU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4NL	-	XC9235E0LC0R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4NL	-	XC9235E0LC4R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4NL	-	XC9235E0LCER-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4NL	mg	AP6233S-31DHNGU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NL	mg	AP6233S-31DHNPU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4NM	-	AP6233S-31DLNGU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NM	-	AP6233S-31DLNPU	LVR-IC	LDO, 3.1V±2%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4NM	-	XC9235E0MC0R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4NM	-	XC9235E0MC4R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4NM	-	XC9235E0MCER-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4NM	mg	AP6233S-31DLNGU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4NM	mg	AP6233S-31DLNPU1	LVR-IC	LDO, 3.1V±1%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4P	-	R3117K441C	Vdet-IC	4.4V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4P	-	RP101K301D	LVR-IC	LDO, LN, 3.0V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4P	-	RP112K461D	LVR-IC	LDO, 4.6V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
4P	-	RP173K461B	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4P	-	UNRF1AL	Si-pnp-Digi	Sw, 50V, 80mA, 100mW, 80MHz, R1/R2=4k7/47k	ML3	22ta	-	2b	Pan
4P	-	XC6221D2917R	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4P	-	XC6223E3119R-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4P0	-	XC9235E10C0R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4P0	-	XC9235E10C4R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4P0	-	XC9235E10CER-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4P1	-	XC9235E11C0R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4P1	-	XC9235E11C4R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4P1	-	XC9235E11CER-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4P2	-	XC9235E12C0R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4P2	-	XC9235E12C4R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4P2	-	XC9235E12CER-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4P3	-	XC9235E13C0R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4P3	-	XC9235E13C4R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4P3	-	XC9235E13CER-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4P4	-	XC9235E14C0R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4P4	-	XC9235E14C4R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4P4	-	XC9235E14CER-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4P5	-	XC9235E15C0R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4P5	-	XC9235E15C4R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4P5	-	XC9235E15CER-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4P6	-	XC9235E16C0R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4P6	-	XC9235E16C4R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4P6	-	XC9235E16CER-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4P7	-	XC9235E17C0R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4P7	-	XC9235E17C4R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4P7	-	XC9235E17CER-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4P8	-	XC9235E18C0R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4P8	-	XC9235E18C4R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4P8	-	XC9235E18CER-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4P9	-	XC9235E19C0R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4P9	-	XC9235E19C4R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4P9	-	XC9235E19CER-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4PA	-	XC9235E1AC0R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4PA	-	XC9235E1AC4R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4PA	-	XC9235E1ACER-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4PB	-	XC9235E1BC0R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4PB	-	XC9235E1BC4R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4PB	-	XC9235E1BCER-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4PC	-	XC9235E1CC0R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4PC	-	XC9235E1CC4R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4PC	-	XC9235E1CCER-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4PD	-	XC9235E1DC0R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4PD	-	XC9235E1DC4R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4PD	-	XC9235E1DCER-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4PE	-	XC9235E1EC0R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4PE	-	XC9235E1EC4R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4PE	-	XC9235E1ECER-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4PF	-	XC9235E1FC0R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4PF	-	XC9235E1FC4R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4PF	-	XC9235E1FCER-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4PH	-	XC9235E1HC0R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4PH	-	XC9235E1HC4R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4PH	-	XC9235E1HCER-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4PK	-	XC9235E1KC0R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4PK	-	XC9235E1KC4R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4PK	-	XC9235E1KCER-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4PL	-	XC9235E1LC0R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4PL	-	XC9235E1LC4R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4PL	-	XC9235E1LCER-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4PM	-	XC9235E1MC0R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4PM	-	XC9235E1MC4R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4PM	-	XC9235E1MCER-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4Q	-	R3117K451C	Vdet-IC	4.5V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4Q	-	RP101K311D	LVR-IC	LDO, LN, 3.1V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4Q	-	RP112K471D	LVR-IC	LDO, 4.7V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
4Q	-	RP173K471B	LVR-IC	LDO, 4.7V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4QA	-	AP6233S-33NHFGU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QA	-	AP6233S-33NHFPU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
4QA	mg	AP6233S-33NHFGU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QA	mg	AP6233S-33NHFPU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
4QB	-	AP6233S-33NLFGU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QB	-	AP6233S-33NLFPU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
4QB	mg	AP6233S-33NLFGU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QB	mg	AP6233S-33NLFPU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
4QC	-	AP6233S-33NHNGU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QC	-	AP6233S-33NHNPU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
4QC	mg	AP6233S-33NHNGU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QC	mg	AP6233S-33NHNPU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
4QD	-	AP6233S-33NLNGU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QD	-	AP6233S-33NLNPU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
4QD	mg	AP6233S-33NLNGU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QD	mg	AP6233S-33NLNPU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
4QE	-	AP6233S-33UHFGU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QE	-	AP6233S-33UHFPU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4QE	mg	AP6233S-33UHFGU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QE	mg	AP6233S-33UHFPU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4QF	-	AP6233S-33ULFGU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QF	-	AP6233S-33ULFPU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4QF	mg	AP6233S-33ULFGU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QF	mg	AP6233S-33ULFPU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4QG	-	AP6233S-33UHNGU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QG	-	AP6233S-33UHNPU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4QG	mg	AP6233S-33UHNGU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QG	mg	AP6233S-33UHNPU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4QH	-	AP6233S-33ULNGU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QH	-	AP6233S-33ULNPU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4QH	mg	AP6233S-33ULNGU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4QH	mg	AP6233S-33ULNPU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4QJ	-	AP6233S-33DHFGU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QJ	-	AP6233S-33DHFPU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4QJ	mg	AP6233S-33DHFGU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QJ	mg	AP6233S-33DHFPU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4QK	-	AP6233S-33DLFGU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QK	-	AP6233S-33DLFPU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4QK	mg	AP6233S-33DLFGU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QK	mg	AP6233S-33DLFPU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4QL	-	AP6233S-33DHNGU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QL	-	AP6233S-33DHNPU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4QL	mg	AP6233S-33DHNGU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QL	mg	AP6233S-33DHNPU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4QM	-	AP6233S-33DLNGU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QM	-	AP6233S-33DLNPU	LVR-IC	LDO, 3.3V±2%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4QM	mg	AP6233S-33DLNGU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4QM	mg	AP6233S-33DLNPU1	LVR-IC	LDO, 3.3V±1%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4R	-	R3117K461C	Vdet-IC	4.6V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4R	-	RP101K331D	LVR-IC	LDO, LN, 3.3V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4R	-	RP112K481D	LVR-IC	LDO, 4.8V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
4R	-	RP173K481B	LVR-IC	LDO, 4.8V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4R	-	XC6221D3017R	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4R	-	XC6223E3219R-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4R0	-	XC9235E20C0R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4R0	-	XC9235E20C4R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4R0	-	XC9235E20CER-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4R1	-	XC9235E21C0R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4R1	-	XC9235E21C4R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4R1	-	XC9235E21CER-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4R2	-	XC9235E22C0R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4R2	-	XC9235E22C4R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4R2	-	XC9235E22CER-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4R3	-	XC9235E23C0R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4R3	-	XC9235E23C4R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4R3	-	XC9235E23CER-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4R4	-	XC9235E24C0R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4R4	-	XC9235E24C4R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4R4	-	XC9235E24CER-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4R5	-	XC9235E25C0R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4R5	-	XC9235E25C4R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4R5	-	XC9235E25CER-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4R6	-	XC9235E26C0R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4R6	-	XC9235E26C4R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4R6	-	XC9235E26CER-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4R7	-	XC9235E27C0R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4R7	-	XC9235E27C4R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4R7	-	XC9235E27CER-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4R8	-	XC9235E28C0R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4R8	-	XC9235E28C4R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4R8	-	XC9235E28CER-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4R9	-	XC9235E29C0R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4R9	-	XC9235E29C4R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4R9	-	XC9235E29CER-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4RA	-	XC9235E2AC0R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4RA	-	XC9235E2AC4R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4RA	-	XC9235E2ACER-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4RB	-	XC9235E2BC0R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4RB	-	XC9235E2BC4R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4RB	-	XC9235E2BCER-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4RC	-	XC9235E2CC0R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4RC	-	XC9235E2CC4R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4RC	-	XC9235E2CCER-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4RD	-	XC9235E2DC0R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4RD	-	XC9235E2DC4R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4RD	-	XC9235E2DCER-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4RE	-	XC9235E2EC0R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4RE	-	XC9235E2EC4R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4RE	-	XC9235E2ECER-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4RF	-	XC9235E2FC0R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4RF	-	XC9235E2FC4R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4RF	-	XC9235E2FCER-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4RH	-	XC9235E2HC0R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4RH	-	XC9235E2HC4R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4RH	-	XC9235E2HCER-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4RK	-	XC9235E2KC0R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4RK	-	XC9235E2KC4R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4RK	-	XC9235E2KCER-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4RL	-	XC9235E2LC0R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4RL	-	XC9235E2LC4R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4RL	-	XC9235E2LCER-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4RM	-	XC9235E2MC0R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4RM	-	XC9235E2MC4R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4RM	-	XC9235E2MCER-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4S	-	R3117K471C	Vdet-IC	4.7V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4S	-	RP101K211D	LVR-IC	LDO, LN, 2.1V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4S	-	RP173K491B	LVR-IC	LDO, 4.9V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4S	-	XC6221D3117R	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4S	-	XC6223E3319R-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4S0	-	XC9235E30C0R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4S0	-	XC9235E30C4R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4S0	-	XC9235E30CER-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4S1	-	XC9235E31C0R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4S1	-	XC9235E31C4R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4S1	-	XC9235E31CER-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4S2	-	XC9235E32C0R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4S2	-	XC9235E32C4R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4S2	-	XC9235E32CER-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4S3	-	XC9235E33C0R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4S3	-	XC9235E33C4R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4S3	-	XC9235E33CER-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4S4	-	XC9235E34C0R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4S4	-	XC9235E34C4R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4S4	-	XC9235E34CER-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4S5	-	XC9235E35C0R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4S5	-	XC9235E35C4R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4S5	-	XC9235E35CER-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4S6	-	XC9235E36C0R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4S6	-	XC9235E36C4R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4S6	-	XC9235E36CER-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4S7	-	XC9235E37C0R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4S7	-	XC9235E37C4R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4S7	-	XC9235E37CER-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4S8	-	XC9235E38C0R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4S8	-	XC9235E38C4R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4S8	-	XC9235E38CER-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4S9	-	XC9235E39C0R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4S9	-	XC9235E39C4R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4S9	-	XC9235E39CER-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4SA	-	XC9235E3AC0R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4SA	-	XC9235E3AC4R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4SA	-	XC9235E3ACER-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4SB	-	XC9235E3BC0R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4SB	-	XC9235E3BC4R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4SB	-	XC9235E3BCER-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4SC	-	XC9235E3CC0R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4SC	-	XC9235E3CC4R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4SC	-	XC9235E3CCER-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4SD	-	XC9235E3DC0R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4SD	-	XC9235E3DC4R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4SD	-	XC9235E3DCER-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4SE	-	XC9235E3EC0R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4SE	-	XC9235E3EC4R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4SE	-	XC9235E3ECER-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4SF	-	XC9235E3FC0R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4SF	-	XC9235E3FC4R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4SF	-	XC9235E3FCER-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4SH	-	XC9235E3HC0R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4SH	-	XC9235E3HC4R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4SH	-	XC9235E3HCER-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4SK	-	XC9235E3KC0R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4SK	-	XC9235E3KC4R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4SK	-	XC9235E3KCER-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4SL	-	XC9235E3LC0R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4SL	-	XC9235E3LC4R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4SL	-	XC9235E3LCER-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4SM	-	XC9235E3MC0R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4SM	-	XC9235E3MC4R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4SM	-	XC9235E3MCER-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4T	-	R3117K481C	Vdet-IC	4.8V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4T	-	RP101K231D	LVR-IC	LDO, LN, 2.3V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4T	-	RP173K501B	LVR-IC	LDO, 5.0V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4T	-	XC6221D3217R	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4T	-	XC6223E3419R-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4T0	-	XC9235E40C0R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4T0	-	XC9235E40C4R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4T0	-	XC9235E40CER-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4U	-	R3117K491C	Vdet-IC	4.9V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4U	-	RP101K241D	LVR-IC	LDO, LN, 2.4V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4U	-	RP173K511B	LVR-IC	LDO, 5.1V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4U	-	XC6221D3317R	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4U	-	XC6223E3519R-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4U8	-	XC9235E08D0R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4U8	-	XC9235E08D4R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4U8	-	XC9235E08DER-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4U9	-	XC9235E09D0R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4U9	-	XC9235E09D4R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4U9	-	XC9235E09DER-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4UL	-	XC9235E0LD0R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4UL	-	XC9235E0LD4R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4UL	-	XC9235E0LDER-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4UM	-	XC9235E0MD0R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4UM	-	XC9235E0MD4R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4UM	-	XC9235E0MDER-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4V	-	R3117K501C	Vdet-IC	5.0V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
4V	-	RP101K321D	LVR-IC	LDO, LN, 3.2V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4V	-	RP173K521B	LVR-IC	LDO, 5.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4V	-	XC6221D3417R	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4V	-	XC6223E3619R-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4V0	-	XC9235E10D0R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4V0	-	XC9235E10D4R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4V0	-	XC9235E10DER-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4V1	-	XC9235E11D0R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4V1	-	XC9235E11D4R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4V1	-	XC9235E11DER-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4V2	-	XC9235E12D0R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4V2	-	XC9235E12D4R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4V2	-	XC9235E12DER-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4V3	-	XC9235E13D0R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4V3	-	XC9235E13D4R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4V3	-	XC9235E13DER-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4V4	-	XC9235E14D0R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4V4	-	XC9235E14D4R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4V4	-	XC9235E14DER-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4V5	-	XC9235E15D0R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4V5	-	XC9235E15D4R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4V5	-	XC9235E15DER-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4V6	-	XC9235E16D0R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4V6	-	XC9235E16D4R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4V6	-	XC9235E16DER-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4V7	-	XC9235E17D0R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4V7	-	XC9235E17D4R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4V7	-	XC9235E17DER-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4V8	-	XC9235E18D0R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4V8	-	XC9235E18D4R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4V8	-	XC9235E18DER-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4V9	-	XC9235E19D0R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4V9	-	XC9235E19D4R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4V9	-	XC9235E19DER-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4VA	-	AP6233S-36NHFGU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VA	-	AP6233S-36NHFPU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4VA	-	XC9235E1AD0R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4VA	-	XC9235E1AD4R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4VA	-	XC9235E1ADER-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4VA	mg	AP6233S-36NHFGU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VA	mg	AP6233S-36NHFPU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
4VB	-	AP6233S-36NLFGU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VB	-	AP6233S-36NLFPU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
4VB	-	XC9235E1BD0R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4VB	-	XC9235E1BD4R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4VB	-	XC9235E1BDER-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4VB	mg	AP6233S-36NLFGU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VB	mg	AP6233S-36NLFPU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
4VC	-	AP6233S-36NHNGU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VC	-	AP6233S-36NHNPU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
4VC	-	XC9235E1CD0R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4VC	-	XC9235E1CD4R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4VC	-	XC9235E1CDER-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4VC	mg	AP6233S-36NHNGU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VC	mg	AP6233S-36NHNPU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
4VD	-	AP6233S-36NLNGU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VD	-	AP6233S-36NLNPU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
4VD	-	XC9235E1DD0R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4VD	-	XC9235E1DD4R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4VD	-	XC9235E1DDER-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4VD	mg	AP6233S-36NLNGU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VD	mg	AP6233S-36NLNPU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
4VE	-	AP6233S-36UHFGU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VE	-	AP6233S-36UHFPU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4VE	-	XC9235E1ED0R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4VE	-	XC9235E1ED4R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4VE	-	XC9235E1EDER-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4VE	mg	AP6233S-36UHFGU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VE	mg	AP6233S-36UHFPU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4VF	-	AP6233S-36ULFGU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VF	-	AP6233S-36ULFPU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4VF	-	XC9235E1FD0R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4VF	-	XC9235E1FD4R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4VF	-	XC9235E1FDER-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4VF	mg	AP6233S-36ULFGU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VF	mg	AP6233S-36ULFPU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4VG	-	AP6233S-36UHNGU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VG	-	AP6233S-36UHNPU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4VG	mg	AP6233S-36UHNGU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VG	mg	AP6233S-36UHNPU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4VH	-	AP6233S-36ULNGU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VH	-	AP6233S-36ULNPU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4VH	-	XC9235E1HD0R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4VH	-	XC9235E1HD4R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4VH	-	XC9235E1HDER-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4VH	mg	AP6233S-36ULNGU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VH	mg	AP6233S-36ULNPU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4VJ	-	AP6233S-36DHFGU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VJ	-	AP6233S-36DHFPU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4VJ	mg	AP6233S-36DHFGU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VJ	mg	AP6233S-36DHFPU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4VK	-	AP6233S-36DLFGU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VK	-	AP6233S-36DLFPU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4VK	-	XC9235E1KD0R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4VK	-	XC9235E1KD4R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4VK	-	XC9235E1KDER-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4VK	mg	AP6233S-36DLFGU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VK	mg	AP6233S-36DLFPU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4VL	-	AP6233S-36DHNGU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VL	-	AP6233S-36DHNPU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4VL	-	XC9235E1LD0R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4VL	-	XC9235E1LD4R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4VL	-	XC9235E1LDER-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4VL	mg	AP6233S-36DHNGU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VL	mg	AP6233S-36DHNPU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4VM	-	AP6233S-36DLNGU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4VM	-	AP6233S-36DLNPU	LVR-IC	LDO, 3.6V±2%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4VM	-	XC9235E1MD0R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4VM	-	XC9235E1MD4R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4VM	-	XC9235E1MDER-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4VM	mg	AP6233S-36DLNGU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4VM	mg	AP6233S-36DLNPU1	LVR-IC	LDO, 3.6V±1%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4W	-	RP101K221D	LVR-IC	LDO, LN, 2.2V±0.8%, 300mA, +CE, CL	DFN1612-4	45vm	VR4	9a	Ric
4W	-	RP173K531B	LVR-IC	LDO, 5.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4X	-	RP173K541B	LVR-IC	LDO, 5.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4X	-	UNRF2A0	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1=47k	ML3	22ta	-	2b	Pan
4X	-	XC6221D3517R	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4X	-	XC6223E3719R-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4X0	-	XC9235E20D0R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4X0	-	XC9235E20D4R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4X0	-	XC9235E20DER-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4X1	-	XC9235E21D0R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4X1	-	XC9235E21D4R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4X1	-	XC9235E21DER-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4X2	-	XC9235E22D0R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4X2	-	XC9235E22D4R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4X2	-	XC9235E22DER-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4X3	-	XC9235E23D0R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4X3	-	XC9235E23D4R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4X3	-	XC9235E23DER-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4X4	-	XC9235E24D0R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4X4	-	XC9235E24D4R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4X4	-	XC9235E24DER-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4X5	-	XC9235E25D0R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4X5	-	XC9235E25D4R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4X5	-	XC9235E25DER-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4X6	-	XC9235E26D0R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4X6	-	XC9235E26D4R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4X6	-	XC9235E26DER-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4X7	-	XC9235E27D0R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4X7	-	XC9235E27D4R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4X7	-	XC9235E27DER-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4X8	-	XC9235E28D0R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4X8	-	XC9235E28D4R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4X8	-	XC9235E28DER-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4X9	-	XC9235E29D0R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4X9	-	XC9235E29D4R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4X9	-	XC9235E29DER-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4XA	-	XC9235E2AD0R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4XA	-	XC9235E2AD4R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4XA	-	XC9235E2ADER-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4XB	-	XC9235E2BD0R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4XB	-	XC9235E2BD4R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4XB	-	XC9235E2BDER-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4XC	-	XC9235E2CD0R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4XC	-	XC9235E2CD4R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4XC	-	XC9235E2CDER-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4XD	-	XC9235E2DD0R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4XD	-	XC9235E2DD4R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4XD	-	XC9235E2DDER-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4XE	-	XC9235E2ED0R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4XE	-	XC9235E2ED4R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4XE	-	XC9235E2EDER-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4XF	-	XC9235E2FD0R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4XF	-	XC9235E2FD4R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4XF	-	XC9235E2FDER-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4XH	-	XC9235E2HD0R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4XH	-	XC9235E2HD4R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4XH	-	XC9235E2HDER-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4XK	-	XC9235E2KD0R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4XK	-	XC9235E2KD4R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4XK	-	XC9235E2KDER-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4XL	-	XC9235E2LD0R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4XL	-	XC9235E2LD4R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4XL	-	XC9235E2LDER-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4XM	-	XC9235E2MD0R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4XM	-	XC9235E2MD4R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4XM	-	XC9235E2MDER-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4Y	-	RP173K551B	LVR-IC	LDO, 5.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
4Y	-	UNRF2A2	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R/R2=22k/22k	ML3	22ta	-	2b	Pan
4Y	-	XC6221D3617R	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4Y	-	XC6223E3819R-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4Y0	-	XC9235E30D0R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4Y0	-	XC9235E30D4R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4Y0	-	XC9235E30DER-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4Y1	-	XC9235E31D0R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4Y1	-	XC9235E31D4R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4Y1	-	XC9235E31DER-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4Y2	-	XC9235E32D0R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4Y2	-	XC9235E32D4R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4Y2	-	XC9235E32DER-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4Y3	-	XC9235E33D0R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4Y3	-	XC9235E33D4R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4Y3	-	XC9235E33DER-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4Y4	-	XC9235E34D0R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4Y4	-	XC9235E34D4R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4Y4	-	XC9235E34DER-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4Y5	-	XC9235E35D0R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4Y5	-	XC9235E35D4R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4Y5	-	XC9235E35DER-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4Y6	-	XC9235E36D0R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4Y6	-	XC9235E36D4R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4Y6	-	XC9235E36DER-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4Y7	-	XC9235E37D0R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4Y7	-	XC9235E37D4R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4Y7	-	XC9235E37DER-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4Y8	-	XC9235E38D0R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4Y8	-	XC9235E38D4R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4Y8	-	XC9235E38DER-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4Y9	-	XC9235E39D0R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4Y9	-	XC9235E39D4R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4Y9	-	XC9235E39DER-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4YA	-	XC9235E3AD0R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4YA	-	XC9235E3AD4R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4YA	-	XC9235E3ADER-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4YB	-	XC9235E3BD0R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4YB	-	XC9235E3BD4R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4YB	-	XC9235E3BDER-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4YC	-	XC9235E3CD0R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4YC	-	XC9235E3CD4R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4YC	-	XC9235E3CDER-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4YD	-	XC9235E3DD0R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4YD	-	XC9235E3DD4R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4YD	-	XC9235E3DDER-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4YE	-	XC9235E3ED0R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4YE	-	XC9235E3ED4R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4YE	-	XC9235E3EDER-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4YF	-	XC9235E3FD0R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4YF	-	XC9235E3FD4R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4YF	-	XC9235E3FDER-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4YH	-	XC9235E3HD0R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4YH	-	XC9235E3HD4R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4YH	-	XC9235E3HDER-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4YK	-	XC9235E3KD0R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4YK	-	XC9235E3KD4R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4YK	-	XC9235E3KDER-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4YL	-	XC9235E3LD0R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4YL	-	XC9235E3LD4R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4YL	-	XC9235E3LDER-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4YM	-	XC9235E3MD0R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
4YM	-	XC9235E3MD4R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4YM	-	XC9235E3MDER-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4Z	-	UNRF2A8	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=510R/5.1k	ML3	22ta	-	2b	Pan
4Z	-	XC6221D3717R	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
4Z	-	XC6223E3919R-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
4Z0	-	XC9235E40D0R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4Z0	-	XC9235E40D4R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
4Z0	-	XC9235E40DER-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
4ZA	-	AP6233S-50NHFGU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZA	-	AP6233S-50NHFPU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
4ZA	mg	AP6233S-50NHFGU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZA	mg	AP6233S-50NHFPU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL	UFN-6	56hq	VR4	9ib	Anw
4ZB	-	AP6233S-50NLFGU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZB	-	AP6233S-50NLFPU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
4ZB	mg	AP6233S-50NLFGU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZB	mg	AP6233S-50NLFPU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL	UFN-6	56hq	VR4	9ib	Anw
4ZC	-	AP6233S-50NHNGU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZC	-	AP6233S-50NHNPU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
4ZC	mg	AP6233S-50NHNGU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZC	mg	AP6233S-50NHNPU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE	UFN-6	56hq	VR4	9ib	Anw
4ZD	-	AP6233S-50NLNGU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZD	-	AP6233S-50NLNPU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
4ZD	mg	AP6233S-50NLNGU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZD	mg	AP6233S-50NLNPU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE	UFN-6	56hq	VR4	9ib	Anw
4ZE	-	AP6233S-50UHFGU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZE	-	AP6233S-50UHFPU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4ZE	mg	AP6233S-50UHFGU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZE	mg	AP6233S-50UHFPU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4ZF	-	AP6233S-50ULFGU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZF	-	AP6233S-50ULFPU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4ZF	mg	AP6233S-50ULFGU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZF	mg	AP6233S-50ULFPU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL, PUR	UFN-6	56hq	VR4	9ib	Anw
4ZG	-	AP6233S-50UHNGU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZG	-	AP6233S-50UHNPU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4ZG	mg	AP6233S-50UHNGU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZG	mg	AP6233S-50UHNPU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4ZH	-	AP6233S-50ULNGU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZH	-	AP6233S-50ULNPU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4ZH	mg	AP6233S-50ULNGU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, PUR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZH	mg	AP6233S-50ULNPU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, PUR	UFN-6	56hq	VR4	9ib	Anw
4ZJ	-	AP6233S-50DHFGU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZJ	-	AP6233S-50DHFPU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4ZJ	mg	AP6233S-50DHFGU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZJ	mg	AP6233S-50DHFPU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4ZK	-	AP6233S-50DLFGU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZK	-	AP6233S-50DLFPU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4ZK	mg	AP6233S-50DLFGU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZK	mg	AP6233S-50DLFPU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, CL, PDR	UFN-6	56hq	VR4	9ib	Anw
4ZL	-	AP6233S-50DHNGU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZL	-	AP6233S-50DHNPU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4ZL	mg	AP6233S-50DHNGU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZL	mg	AP6233S-50DHNPU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst +CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4ZM	-	AP6233S-50DLNGU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZM	-	AP6233S-50DLNPU	LVR-IC	LDO, 5.0V±2%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
4ZM	mg	AP6233S-50DLNGU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, PDR, Halogen-free	UFN-6	56hq	VR4	9ia	Anw
4ZM	mg	AP6233S-50DLNPU1	LVR-IC	LDO, 5.0V±1%, 300mA, Fst -CE, PDR	UFN-6	56hq	VR4	9ib	Anw
5	-	NLU1GT32MU	CMOS-Log	2-input OR gate, TTL level	UDFN-6	57	Log4	9d	Ons
50	-	RP110L241C	LVR-IC	LDO, 2.4V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
50	-	XC6221D3817R	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
50	-	XC6420AB507R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/1.20V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
50	-	XC6420AB50DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.80/1.20V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
5004	-	AUD5004CS09	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(5V/4Ω), select shutdown	BGA-9	39	-	9a	Axp
5015	-	AUD5015CS12	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(5V/4Ω), select shutdown	BGA-12	39	-	9a	Axp
5020	-	AUD5020QS09	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 2.5W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Axp
51	-	RP110L251C	LVR-IC	LDO, 2.5V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
51	-	XC6221D3917R	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
51	-	XC6420AB517R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.10/3.10V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
51	-	XC6420AB51DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.10/3.10V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
52	-	RP110L261C	LVR-IC	LDO, 2.6V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
52	-	XC6221D4017R	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
52	-	XC6223F1219R-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
52	-	XC6420AB527R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/3.10V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
52	-	XC6420AB52DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=1.50/3.10V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
53	-	RP110L271C	LVR-IC	LDO, 2.7V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
53	-	XC6221D4117R	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
53	-	XC6223F1319R-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
53	-	XC6420AB537R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/2.80V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
53	-	XC6420AB53DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/2.80V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
54	-	74AUP1G74GF	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	SOT1089	53	Log59	9z	Nxp
54	-	74AUP1G74GN	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	SOT1116	53	Log59	9z	Nxp
54	-	74AUP1G74GS	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	SOT1203	53	Log59	9z	Nxp
54	-	LM4854IBL	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.9W(4Ω)+2x85mW(8Ω), shutdown	BGA-12	39	-	9a	Nsc
54	-	MIC5365-1.2YMT	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	MLF-4	48vm	VR4	9x	Mcr
54	-	RP110L281C	LVR-IC	LDO, 2.8V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
54	-	XC6221D4217R	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
54	-	XC6223F1419R-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
54	-	XC6420AB547R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/2.80V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
54	-	XC6420AB54DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.00/2.80V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
54000IRTZ	-	ISL54000IR	Lin-IC	AF PA, 2.7..5.5V, 2x950mW(5V/8Ω), shutdown	TQFN-20	38a5	-	9m	Isl
54001IRTZ	-	ISL54001IR	Lin-IC	AF PA, 2.7..5.5V, 2x950mW(5V/8Ω), shutdown	TQFN-20	38a5	-	9m	Isl
54002IRTZ	-	ISL54002IR	Lin-IC	AF PA, 2.7..5.5V, 2x950mW(5V/8Ω), shutdown	TQFN-20	38a5	-	9m	Isl
54003IRTZ	-	ISL54003IR	Lin-IC	AF PA, BTL, 2.7..5.5V, 950mW(8Ω)+2x50mW(32Ω), shutdown	TQFN-20	38a5	-	9m	Isl
54004IRTZ	-	ISL54004IR	Lin-IC	AF PA, BTL, 2.7..5.5V, 950mW(8Ω)+2x50mW(32Ω), shutdown	TQFN-20	38a5	-	9m	Isl
54005IRTZ	-	ISL54005IR	Lin-IC	AF PA, BTL, 2.7..5.5V, 950mW(8Ω)+2x50mW(32Ω), shutdown	TQFN-20	38a5	-	9m	Isl
54006IRTZ	-	ISL54006IR	Lin-IC	AF PA, BTL, 2.7..5.5V, 950mW(8Ω)+2x50mW(32Ω), shutdown	TQFN-20	38a5	-	9m	Isl
5460	-	BD5460GUL	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 850mW(5V/4Ω), shutdown	BGA-9	39	AFP45	9g	Rhm
5461	-	BD5461GUL	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 850mW(5V/4Ω), shutdown	BGA-9	39	AFP45	9g	Rhm
5465	-	BD5465GUL	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 650mW(5V/4Ω), shutdown	BGA-9	39	AFP45	9g	Rhm
5466	-	BD5466GUL	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 700mW(5V/4Ω), shutdown	BGA-9	39	AFP45	9g	Rhm
5467	-	BD5467GUL	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 700mW(5V/4Ω), shutdown	BGA-9	39	AFP45	9g	Rhm
5468	-	BD5468GUL	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 700mW(5V/4Ω), shutdown	BGA-9	39	AFP45	9g	Rhm
55	-	74AUP1Z125GF	CMOS-Log	X-tal driver with enable and internal resistor	SOT891	52	Log83	9z	Nxp
55	-	74AUP1Z125GM	CMOS-Log	X-tal driver with enable and internal resistor	SOT886	57	Log83	9z	Nxp
55	-	BBY57-02L	C-diode	VCO-tuning, 10V, 20mA, 16.5..18.6pF(4..1V)	TSLP-2-1	13d	-	2b	Inf
55	-	LM4855IBL	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.1W(8Ω)+2x115mW(32Ω), SPI	BGA-20	39	-	9a	Nsc
55	-	MIC5365-1.3YMT	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	MLF-4	48vm	VR4	9x	Mcr
55	-	RP110L281C5	LVR-IC	LDO, 2.85V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
55	-	XC6221D4317R	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
55	-	XC6223F1519R-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
55	-	XC6420AB557R-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/3.00V±2%, 150mA, +CE	USPN-6	52xv	VR19	9a	Tor
55	-	XC6420AB55DR-G	LVR-IC	LDO, Dual out, Vout1/Vout2=3.30/3.00V±2%, 150mA, +CE	USP-6B04	73x4	VR19	9a	Tor
56	-	RP110L291C	LVR-IC	LDO, 2.9V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
56	-	TS4956EIJT	Lin-IC	AF PA, BTL, 2.7..5.5V, 450mW(8Ω)+2x32mW(32Ω), +65mW, I2C	BGA-18	39	-	9a	Ste
56	-	XC6221D4417R	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
56	-	XC6223F1619R-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
57	-	RP110L301C	LVR-IC	LDO, 3.0V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
57	-	XC6217C08A7R-G	LVR-IC	LDO, 0.85V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
57	-	XC6221D4517R	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
57	-	XC6223F1719R-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
58	-	RP110L311C	LVR-IC	LDO, 3.1V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
58	-	XC6217C09A7R-G	LVR-IC	LDO, 0.95V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
58	-	XC6221D4617R	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
58	-	XC6223F1819R-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
59	-	74AUP1T97GF	CMOS-Log	Configurable gate with voltage-level translator	SOT891	52	Log41	9z	Nxp
59	-	74AUP1T97GM	CMOS-Log	Configurable gate with voltage-level translator	SOT886	57	Log41	9z	Nxp
59	-	LEE-59+	MMIC	RF amplifier, DC..5GHz, 17.8dB (50Ω)	FG873	36aa	A1	9b	Mc
59	-	RP110L321C	LVR-IC	LDO, 3.2V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
59	-	XC6217C10A7R-G	LVR-IC	LDO, 1.05V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
59	-	XC6221D4717R	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
59	-	XC6223F1919R-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5A	-	RP101K122B	LVR-IC	LDO, LN, 1.2V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5A	-	RP173K121D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5A	-	RP200K081B	LVR-IC	LDO, 0.8V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5A	-	XC6217C11A7R-G	LVR-IC	LDO, 1.15V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5A	-	XC6221D4817R	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
5A	-	XC6223F2019R-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5A116	-	XC6103A116ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A117	-	XC6103A117ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A118	-	XC6103A118ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A119	-	XC6103A119ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A120	-	XC6103A120ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A121	-	XC6103A121ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A122	-	XC6103A122ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A123	-	XC6103A123ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A124	-	XC6103A124ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A125	-	XC6103A125ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5A126	-	XC6103A126ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A127	-	XC6103A127ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A128	-	XC6103A128ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A129	-	XC6103A129ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A130	-	XC6103A130ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A131	-	XC6103A131ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A132	-	XC6103A132ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A133	-	XC6103A133ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A134	-	XC6103A134ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A135	-	XC6103A135ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A136	-	XC6103A136ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A137	-	XC6103A137ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A138	-	XC6103A138ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A139	-	XC6103A139ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A140	-	XC6103A140ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A141	-	XC6103A141ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A142	-	XC6103A142ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A143	-	XC6103A143ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A144	-	XC6103A144ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A145	-	XC6103A145ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A146	-	XC6103A146ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A147	-	XC6103A147ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A148	-	XC6103A148ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A149	-	XC6103A149ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A150	-	XC6103A150ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A200	-	XC6371A200D	DC-DC-IC	PWM step-up, 50kHz, 2.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A201	-	XC6371A201D	DC-DC-IC	PWM step-up, 100kHz, 2.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A202	-	XC6371A202D	DC-DC-IC	PWM step-up, 180kHz, 2.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A210	-	XC6371A210D	DC-DC-IC	PWM step-up, 50kHz, 2.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A211	-	XC6371A211D	DC-DC-IC	PWM step-up, 100kHz, 2.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A212	-	XC6371A212D	DC-DC-IC	PWM step-up, 180kHz, 2.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A216	-	XC6103A216ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A217	-	XC6103A217ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A218	-	XC6103A218ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A219	-	XC6103A219ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A220	-	XC6103A220ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A220	-	XC6371A220D	DC-DC-IC	PWM step-up, 50kHz, 2.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A221	-	XC6103A221ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A221	-	XC6371A221D	DC-DC-IC	PWM step-up, 100kHz, 2.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A222	-	XC6103A222ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A222	-	XC6371A222D	DC-DC-IC	PWM step-up, 180kHz, 2.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A223	-	XC6103A223ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A224	-	XC6103A224ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A225	-	XC6103A225ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A226	-	XC6103A226ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A227	-	XC6103A227ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A228	-	XC6103A228ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A229	-	XC6103A229ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A230	-	XC6103A230ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A230	-	XC6371A230D	DC-DC-IC	PWM step-up, 50kHz, 2.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A231	-	XC6103A231ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A231	-	XC6371A231D	DC-DC-IC	PWM step-up, 100kHz, 2.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A232	-	XC6103A232ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A232	-	XC6371A232D	DC-DC-IC	PWM step-up, 180kHz, 2.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A233	-	XC6103A233ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A234	-	XC6103A234ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A235	-	XC6103A235ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A236	-	XC6103A236ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A237	-	XC6103A237ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A238	-	XC6103A238ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A239	-	XC6103A239ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A240	-	XC6103A240ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A240	-	XC6371A240D	DC-DC-IC	PWM step-up, 50kHz, 2.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A241	-	XC6103A241ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A241	-	XC6371A241D	DC-DC-IC	PWM step-up, 100kHz, 2.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A242	-	XC6103A242ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A242	-	XC6371A242D	DC-DC-IC	PWM step-up, 180kHz, 2.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A243	-	XC6103A243ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A244	-	XC6103A244ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A245	-	XC6103A245ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5A246	-	XC6103A246ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A247	-	XC6103A247ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A248	-	XC6103A248ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A249	-	XC6103A249ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A250	-	XC6103A250ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A250	-	XC6371A250D	DC-DC-IC	PWM step-up, 50kHz, 2.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A251	-	XC6371A251D	DC-DC-IC	PWM step-up, 100kHz, 2.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A252	-	XC6371A252D	DC-DC-IC	PWM step-up, 180kHz, 2.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A260	-	XC6371A260D	DC-DC-IC	PWM step-up, 50kHz, 2.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A261	-	XC6371A261D	DC-DC-IC	PWM step-up, 100kHz, 2.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A262	-	XC6371A262D	DC-DC-IC	PWM step-up, 180kHz, 2.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A270	-	XC6371A270D	DC-DC-IC	PWM step-up, 50kHz, 2.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A271	-	XC6371A271D	DC-DC-IC	PWM step-up, 100kHz, 2.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A272	-	XC6371A272D	DC-DC-IC	PWM step-up, 180kHz, 2.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A280	-	XC6371A280D	DC-DC-IC	PWM step-up, 50kHz, 2.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A281	-	XC6371A281D	DC-DC-IC	PWM step-up, 100kHz, 2.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A282	-	XC6371A282D	DC-DC-IC	PWM step-up, 180kHz, 2.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A290	-	XC6371A290D	DC-DC-IC	PWM step-up, 50kHz, 2.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A291	-	XC6371A291D	DC-DC-IC	PWM step-up, 100kHz, 2.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A292	-	XC6371A292D	DC-DC-IC	PWM step-up, 180kHz, 2.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A300	-	XC6371A300D	DC-DC-IC	PWM step-up, 50kHz, 3.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A301	-	XC6371A301D	DC-DC-IC	PWM step-up, 100kHz, 3.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A302	-	XC6371A302D	DC-DC-IC	PWM step-up, 180kHz, 3.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A310	-	XC6371A310D	DC-DC-IC	PWM step-up, 50kHz, 3.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A311	-	XC6371A311D	DC-DC-IC	PWM step-up, 100kHz, 3.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A312	-	XC6371A312D	DC-DC-IC	PWM step-up, 180kHz, 3.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A316	-	XC6103A316ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A317	-	XC6103A317ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A318	-	XC6103A318ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A319	-	XC6103A319ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A320	-	XC6103A320ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A320	-	XC6371A320D	DC-DC-IC	PWM step-up, 50kHz, 3.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A321	-	XC6103A321ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A321	-	XC6371A321D	DC-DC-IC	PWM step-up, 100kHz, 3.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A322	-	XC6103A322ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A322	-	XC6371A322D	DC-DC-IC	PWM step-up, 180kHz, 3.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A323	-	XC6103A323ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A324	-	XC6103A324ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A325	-	XC6103A325ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A326	-	XC6103A326ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A327	-	XC6103A327ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A328	-	XC6103A328ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A329	-	XC6103A329ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A330	-	XC6103A330ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A330	-	XC6371A330D	DC-DC-IC	PWM step-up, 50kHz, 3.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A331	-	XC6103A331ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A331	-	XC6371A331D	DC-DC-IC	PWM step-up, 100kHz, 3.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A332	-	XC6103A332ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A332	-	XC6371A332D	DC-DC-IC	PWM step-up, 180kHz, 3.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A333	-	XC6103A333ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A334	-	XC6103A334ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A335	-	XC6103A335ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A336	-	XC6103A336ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A337	-	XC6103A337ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A338	-	XC6103A338ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A339	-	XC6103A339ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A340	-	XC6103A340ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A340	-	XC6371A340D	DC-DC-IC	PWM step-up, 50kHz, 3.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A341	-	XC6103A341ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A341	-	XC6371A341D	DC-DC-IC	PWM step-up, 100kHz, 3.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A342	-	XC6103A342ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A342	-	XC6371A342D	DC-DC-IC	PWM step-up, 180kHz, 3.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A343	-	XC6103A343ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A344	-	XC6103A344ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A345	-	XC6103A345ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A346	-	XC6103A346ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A347	-	XC6103A347ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A348	-	XC6103A348ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A349	-	XC6103A349ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A350	-	XC6103A350ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5A350	-	XC6371A350D	DC-DC-IC	PWM step-up, 50kHz, 3.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A351	-	XC6371A351D	DC-DC-IC	PWM step-up, 100kHz, 3.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A352	-	XC6371A352D	DC-DC-IC	PWM step-up, 180kHz, 3.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A360	-	XC6371A360D	DC-DC-IC	PWM step-up, 50kHz, 3.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A361	-	XC6371A361D	DC-DC-IC	PWM step-up, 100kHz, 3.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A362	-	XC6371A362D	DC-DC-IC	PWM step-up, 180kHz, 3.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A370	-	XC6371A370D	DC-DC-IC	PWM step-up, 50kHz, 3.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A371	-	XC6371A371D	DC-DC-IC	PWM step-up, 100kHz, 3.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A372	-	XC6371A372D	DC-DC-IC	PWM step-up, 180kHz, 3.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A380	-	XC6371A380D	DC-DC-IC	PWM step-up, 50kHz, 3.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A381	-	XC6371A381D	DC-DC-IC	PWM step-up, 100kHz, 3.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A382	-	XC6371A382D	DC-DC-IC	PWM step-up, 180kHz, 3.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A390	-	XC6371A390D	DC-DC-IC	PWM step-up, 50kHz, 3.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A391	-	XC6371A391D	DC-DC-IC	PWM step-up, 100kHz, 3.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A392	-	XC6371A392D	DC-DC-IC	PWM step-up, 180kHz, 3.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A400	-	XC6371A400D	DC-DC-IC	PWM step-up, 50kHz, 4.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A401	-	XC6371A401D	DC-DC-IC	PWM step-up, 100kHz, 4.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A402	-	XC6371A402D	DC-DC-IC	PWM step-up, 180kHz, 4.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A410	-	XC6371A410D	DC-DC-IC	PWM step-up, 50kHz, 4.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A411	-	XC6371A411D	DC-DC-IC	PWM step-up, 100kHz, 4.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A412	-	XC6371A412D	DC-DC-IC	PWM step-up, 180kHz, 4.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A416	-	XC6103A416ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A417	-	XC6103A417ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A418	-	XC6103A418ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A419	-	XC6103A419ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A420	-	XC6103A420ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A420	-	XC6371A420D	DC-DC-IC	PWM step-up, 50kHz, 4.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A421	-	XC6103A421ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A421	-	XC6371A421D	DC-DC-IC	PWM step-up, 100kHz, 4.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A422	-	XC6103A422ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A422	-	XC6371A422D	DC-DC-IC	PWM step-up, 180kHz, 4.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A423	-	XC6103A423ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A424	-	XC6103A424ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A425	-	XC6103A425ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A426	-	XC6103A426ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A427	-	XC6103A427ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A428	-	XC6103A428ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A429	-	XC6103A429ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A430	-	XC6103A430ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A430	-	XC6371A430D	DC-DC-IC	PWM step-up, 50kHz, 4.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A431	-	XC6103A431ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A431	-	XC6371A431D	DC-DC-IC	PWM step-up, 100kHz, 4.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A432	-	XC6103A432ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A432	-	XC6371A432D	DC-DC-IC	PWM step-up, 180kHz, 4.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A433	-	XC6103A433ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A434	-	XC6103A434ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A435	-	XC6103A435ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A436	-	XC6103A436ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A437	-	XC6103A437ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A438	-	XC6103A438ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A439	-	XC6103A439ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A440	-	XC6103A440ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A440	-	XC6371A440D	DC-DC-IC	PWM step-up, 50kHz, 4.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A441	-	XC6103A441ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A441	-	XC6371A441D	DC-DC-IC	PWM step-up, 100kHz, 4.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A442	-	XC6103A442ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A442	-	XC6371A442D	DC-DC-IC	PWM step-up, 180kHz, 4.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A443	-	XC6103A443ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A444	-	XC6103A444ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A445	-	XC6103A445ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A446	-	XC6103A446ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A447	-	XC6103A447ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A448	-	XC6103A448ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A449	-	XC6103A449ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A450	-	XC6103A450ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A450	-	XC6371A450D	DC-DC-IC	PWM step-up, 50kHz, 4.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A451	-	XC6371A451D	DC-DC-IC	PWM step-up, 100kHz, 4.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A452	-	XC6371A452D	DC-DC-IC	PWM step-up, 180kHz, 4.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A460	-	XC6371A460D	DC-DC-IC	PWM step-up, 50kHz, 4.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A461	-	XC6371A461D	DC-DC-IC	PWM step-up, 100kHz, 4.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5A462	-	XC6371A462D	DC-DC-IC	PWM step-up, 180kHz, 4.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A470	-	XC6371A470D	DC-DC-IC	PWM step-up, 50kHz, 4.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A471	-	XC6371A471D	DC-DC-IC	PWM step-up, 100kHz, 4.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A472	-	XC6371A472D	DC-DC-IC	PWM step-up, 180kHz, 4.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A480	-	XC6371A480D	DC-DC-IC	PWM step-up, 50kHz, 4.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A481	-	XC6371A481D	DC-DC-IC	PWM step-up, 100kHz, 4.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A482	-	XC6371A482D	DC-DC-IC	PWM step-up, 180kHz, 4.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A490	-	XC6371A490D	DC-DC-IC	PWM step-up, 50kHz, 4.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A491	-	XC6371A491D	DC-DC-IC	PWM step-up, 100kHz, 4.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A492	-	XC6371A492D	DC-DC-IC	PWM step-up, 180kHz, 4.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A500	-	XC6371A500D	DC-DC-IC	PWM step-up, 50kHz, 5.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A501	-	XC6371A501D	DC-DC-IC	PWM step-up, 100kHz, 5.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A502	-	XC6371A502D	DC-DC-IC	PWM step-up, 180kHz, 5.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A510	-	XC6371A510D	DC-DC-IC	PWM step-up, 50kHz, 5.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A511	-	XC6371A511D	DC-DC-IC	PWM step-up, 100kHz, 5.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A512	-	XC6371A512D	DC-DC-IC	PWM step-up, 180kHz, 5.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A516	-	XC6103A516ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A517	-	XC6103A517ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A518	-	XC6103A518ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A519	-	XC6103A519ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A520	-	XC6103A520ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A520	-	XC6371A520D	DC-DC-IC	PWM step-up, 50kHz, 5.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A521	-	XC6103A521ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A521	-	XC6371A521D	DC-DC-IC	PWM step-up, 100kHz, 5.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A522	-	XC6103A522ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A522	-	XC6371A522D	DC-DC-IC	PWM step-up, 180kHz, 5.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A523	-	XC6103A523ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A524	-	XC6103A524ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A525	-	XC6103A525ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A526	-	XC6103A526ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A527	-	XC6103A527ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A528	-	XC6103A528ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A529	-	XC6103A529ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A530	-	XC6103A530ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A530	-	XC6371A530D	DC-DC-IC	PWM step-up, 50kHz, 5.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A531	-	XC6103A531ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A531	-	XC6371A531D	DC-DC-IC	PWM step-up, 100kHz, 5.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A532	-	XC6103A532ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A532	-	XC6371A532D	DC-DC-IC	PWM step-up, 180kHz, 5.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A533	-	XC6103A533ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A534	-	XC6103A534ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A535	-	XC6103A535ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A536	-	XC6103A536ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A537	-	XC6103A537ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A538	-	XC6103A538ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A539	-	XC6103A539ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A540	-	XC6103A540ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A540	-	XC6371A540D	DC-DC-IC	PWM step-up, 50kHz, 5.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A541	-	XC6103A541ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A541	-	XC6371A541D	DC-DC-IC	PWM step-up, 100kHz, 5.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A542	-	XC6103A542ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A542	-	XC6371A542D	DC-DC-IC	PWM step-up, 180kHz, 5.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A543	-	XC6103A543ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A544	-	XC6103A544ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A545	-	XC6103A545ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A546	-	XC6103A546ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A547	-	XC6103A547ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A548	-	XC6103A548ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A549	-	XC6103A549ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A550	-	XC6103A550ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A550	-	XC6371A550D	DC-DC-IC	PWM step-up, 50kHz, 5.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A551	-	XC6371A551D	DC-DC-IC	PWM step-up, 100kHz, 5.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A552	-	XC6371A552D	DC-DC-IC	PWM step-up, 180kHz, 5.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A560	-	XC6371A560D	DC-DC-IC	PWM step-up, 50kHz, 5.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A561	-	XC6371A561D	DC-DC-IC	PWM step-up, 100kHz, 5.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A562	-	XC6371A562D	DC-DC-IC	PWM step-up, 180kHz, 5.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A570	-	XC6371A570D	DC-DC-IC	PWM step-up, 50kHz, 5.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A571	-	XC6371A571D	DC-DC-IC	PWM step-up, 100kHz, 5.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A572	-	XC6371A572D	DC-DC-IC	PWM step-up, 180kHz, 5.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A580	-	XC6371A580D	DC-DC-IC	PWM step-up, 50kHz, 5.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5A581	-	XC6371A581D	DC-DC-IC	PWM step-up, 100kHz, 5.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A582	-	XC6371A582D	DC-DC-IC	PWM step-up, 180kHz, 5.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A590	-	XC6371A590D	DC-DC-IC	PWM step-up, 50kHz, 5.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A591	-	XC6371A591D	DC-DC-IC	PWM step-up, 100kHz, 5.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A592	-	XC6371A592D	DC-DC-IC	PWM step-up, 180kHz, 5.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A600	-	XC6371A600D	DC-DC-IC	PWM step-up, 50kHz, 6.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A601	-	XC6371A601D	DC-DC-IC	PWM step-up, 100kHz, 6.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A602	-	XC6371A602D	DC-DC-IC	PWM step-up, 180kHz, 6.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A610	-	XC6371A610D	DC-DC-IC	PWM step-up, 50kHz, 6.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A611	-	XC6371A611D	DC-DC-IC	PWM step-up, 100kHz, 6.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A612	-	XC6371A612D	DC-DC-IC	PWM step-up, 180kHz, 6.1V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A616	-	XC6103A616ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A617	-	XC6103A617ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A618	-	XC6103A618ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A619	-	XC6103A619ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A620	-	XC6103A620ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A620	-	XC6371A620D	DC-DC-IC	PWM step-up, 50kHz, 6.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A621	-	XC6103A621ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A621	-	XC6371A621D	DC-DC-IC	PWM step-up, 100kHz, 6.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A622	-	XC6103A622ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A622	-	XC6371A622D	DC-DC-IC	PWM step-up, 180kHz, 6.2V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A623	-	XC6103A623ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A624	-	XC6103A624ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A625	-	XC6103A625ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A626	-	XC6103A626ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A627	-	XC6103A627ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A628	-	XC6103A628ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A629	-	XC6103A629ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A630	-	XC6103A630ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A630	-	XC6371A630D	DC-DC-IC	PWM step-up, 50kHz, 6.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A631	-	XC6103A631ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A631	-	XC6371A631D	DC-DC-IC	PWM step-up, 100kHz, 6.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A632	-	XC6103A632ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A632	-	XC6371A632D	DC-DC-IC	PWM step-up, 180kHz, 6.3V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A633	-	XC6103A633ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A634	-	XC6103A634ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A635	-	XC6103A635ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A636	-	XC6103A636ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A637	-	XC6103A637ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A638	-	XC6103A638ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A639	-	XC6103A639ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A640	-	XC6103A640ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A640	-	XC6371A640D	DC-DC-IC	PWM step-up, 50kHz, 6.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A641	-	XC6103A641ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A641	-	XC6371A641D	DC-DC-IC	PWM step-up, 100kHz, 6.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A642	-	XC6103A642ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A642	-	XC6371A642D	DC-DC-IC	PWM step-up, 180kHz, 6.4V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A643	-	XC6103A643ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A644	-	XC6103A644ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A645	-	XC6103A645ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A646	-	XC6103A646ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A647	-	XC6103A647ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A648	-	XC6103A648ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A649	-	XC6103A649ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A650	-	XC6103A650ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
5A650	-	XC6371A650D	DC-DC-IC	PWM step-up, 50kHz, 6.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A651	-	XC6371A651D	DC-DC-IC	PWM step-up, 100kHz, 6.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A652	-	XC6371A652D	DC-DC-IC	PWM step-up, 180kHz, 6.5V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A660	-	XC6371A660D	DC-DC-IC	PWM step-up, 50kHz, 6.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A661	-	XC6371A661D	DC-DC-IC	PWM step-up, 100kHz, 6.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A662	-	XC6371A662D	DC-DC-IC	PWM step-up, 180kHz, 6.6V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A670	-	XC6371A670D	DC-DC-IC	PWM step-up, 50kHz, 6.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A671	-	XC6371A671D	DC-DC-IC	PWM step-up, 100kHz, 6.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A672	-	XC6371A672D	DC-DC-IC	PWM step-up, 180kHz, 6.7V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A680	-	XC6371A680D	DC-DC-IC	PWM step-up, 50kHz, 6.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A681	-	XC6371A681D	DC-DC-IC	PWM step-up, 100kHz, 6.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A682	-	XC6371A682D	DC-DC-IC	PWM step-up, 180kHz, 6.8V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A690	-	XC6371A690D	DC-DC-IC	PWM step-up, 50kHz, 6.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A691	-	XC6371A691D	DC-DC-IC	PWM step-up, 100kHz, 6.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A692	-	XC6371A692D	DC-DC-IC	PWM step-up, 180kHz, 6.9V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5A700	-	XC6371A700D	DC-DC-IC	PWM step-up, 50kHz, 7.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A701	-	XC6371A701D	DC-DC-IC	PWM step-up, 100kHz, 7.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A702	-	XC6371A702D	DC-DC-IC	PWM step-up, 180kHz, 7.0V±2.5%, 100mA	USP-6B	49ga	DC2	9b	Tor
5A8	-	XC9236A08C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5A8	-	XC9236A08C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5A8	-	XC9236A08CER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5A9	-	XC9236A09C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5A9	-	XC9236A09C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5A9	-	XC9236A09CER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5AL	-	XC9236A0LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5AL	-	XC9236A0LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5AL	-	XC9236A0LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5AM	-	XC9236A0MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5AM	-	XC9236A0MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5AM	-	XC9236A0MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5B	-	RP101K132B	LVR-IC	LDO, LN, 1.3V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5B	-	RP173K121D5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5B	-	RP200K091B	LVR-IC	LDO, 0.9V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5B	-	XC6217C12A7R-G	LVR-IC	LDO, 1.25V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5B	-	XC6221D4917R	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
5B	-	XC6223F2119R-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5B0	-	XC9236A10C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5B0	-	XC9236A10C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5B0	-	XC9236A10CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5B1	-	XC9236A11C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5B1	-	XC9236A11C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5B1	-	XC9236A11CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5B2	-	XC9236A12C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5B2	-	XC9236A12C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5B2	-	XC9236A12CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5B216	-	XC6103B216ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B217	-	XC6103B217ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B218	-	XC6103B218ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B219	-	XC6103B219ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B220	-	XC6103B220ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B221	-	XC6103B221ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B222	-	XC6103B222ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B223	-	XC6103B223ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B224	-	XC6103B224ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B225	-	XC6103B225ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B226	-	XC6103B226ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B227	-	XC6103B227ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B228	-	XC6103B228ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B229	-	XC6103B229ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B230	-	XC6103B230ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B231	-	XC6103B231ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B232	-	XC6103B232ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B233	-	XC6103B233ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B234	-	XC6103B234ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B235	-	XC6103B235ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B236	-	XC6103B236ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B237	-	XC6103B237ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B238	-	XC6103B238ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B239	-	XC6103B239ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B240	-	XC6103B240ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B241	-	XC6103B241ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B242	-	XC6103B242ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B243	-	XC6103B243ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B244	-	XC6103B244ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B245	-	XC6103B245ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B246	-	XC6103B246ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B247	-	XC6103B247ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B248	-	XC6103B248ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B249	-	XC6103B249ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B250	-	XC6103B250ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B3	-	XC9236A13C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5B3	-	XC9236A13C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5B3	-	XC9236A13CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5B316	-	XC6103B316ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B317	-	XC6103B317ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5B318	-	XC6103B318ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B319	-	XC6103B319ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B320	-	XC6103B320ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B321	-	XC6103B321ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B322	-	XC6103B322ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B323	-	XC6103B323ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B324	-	XC6103B324ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B325	-	XC6103B325ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B326	-	XC6103B326ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B327	-	XC6103B327ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B328	-	XC6103B328ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B329	-	XC6103B329ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B330	-	XC6103B330ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B331	-	XC6103B331ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B332	-	XC6103B332ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B333	-	XC6103B333ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B334	-	XC6103B334ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B335	-	XC6103B335ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B336	-	XC6103B336ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B337	-	XC6103B337ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B338	-	XC6103B338ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B339	-	XC6103B339ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B340	-	XC6103B340ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B341	-	XC6103B341ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B342	-	XC6103B342ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B343	-	XC6103B343ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B344	-	XC6103B344ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B345	-	XC6103B345ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B346	-	XC6103B346ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B347	-	XC6103B347ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B348	-	XC6103B348ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B349	-	XC6103B349ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B350	-	XC6103B350ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B4	-	XC9236A14C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5B4	-	XC9236A14C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5B4	-	XC9236A14CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5B416	-	XC6103B416ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B417	-	XC6103B417ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B418	-	XC6103B418ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B419	-	XC6103B419ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B420	-	XC6103B420ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B421	-	XC6103B421ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B422	-	XC6103B422ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B423	-	XC6103B423ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B424	-	XC6103B424ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B425	-	XC6103B425ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B426	-	XC6103B426ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B427	-	XC6103B427ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B428	-	XC6103B428ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B429	-	XC6103B429ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B430	-	XC6103B430ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B431	-	XC6103B431ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B432	-	XC6103B432ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B433	-	XC6103B433ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B434	-	XC6103B434ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B435	-	XC6103B435ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B436	-	XC6103B436ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B437	-	XC6103B437ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B438	-	XC6103B438ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B439	-	XC6103B439ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B440	-	XC6103B440ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B441	-	XC6103B441ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B442	-	XC6103B442ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B443	-	XC6103B443ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B444	-	XC6103B444ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B445	-	XC6103B445ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B446	-	XC6103B446ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B447	-	XC6103B447ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B448	-	XC6103B448ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B449	-	XC6103B449ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5B450	-	XC6103B450ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B5	-	XC9236A15C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5B5	-	XC9236A15C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5B5	-	XC9236A15CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5B516	-	XC6103B516ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B517	-	XC6103B517ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B518	-	XC6103B518ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B519	-	XC6103B519ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B520	-	XC6103B520ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B521	-	XC6103B521ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B522	-	XC6103B522ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B523	-	XC6103B523ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B524	-	XC6103B524ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B525	-	XC6103B525ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B526	-	XC6103B526ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B527	-	XC6103B527ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B528	-	XC6103B528ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B529	-	XC6103B529ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B530	-	XC6103B530ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B531	-	XC6103B531ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B532	-	XC6103B532ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B533	-	XC6103B533ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B534	-	XC6103B534ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B535	-	XC6103B535ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B536	-	XC6103B536ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B537	-	XC6103B537ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B538	-	XC6103B538ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B539	-	XC6103B539ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B540	-	XC6103B540ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B541	-	XC6103B541ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B542	-	XC6103B542ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B543	-	XC6103B543ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B544	-	XC6103B544ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B545	-	XC6103B545ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B546	-	XC6103B546ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B547	-	XC6103B547ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B548	-	XC6103B548ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B549	-	XC6103B549ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B550	-	XC6103B550ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B6	-	XC9236A16C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5B6	-	XC9236A16C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5B6	-	XC9236A16CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5B616	-	XC6103B616ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B617	-	XC6103B617ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B618	-	XC6103B618ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B619	-	XC6103B619ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B620	-	XC6103B620ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B621	-	XC6103B621ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B622	-	XC6103B622ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B623	-	XC6103B623ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B624	-	XC6103B624ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B625	-	XC6103B625ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B626	-	XC6103B626ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B627	-	XC6103B627ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B628	-	XC6103B628ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B629	-	XC6103B629ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B630	-	XC6103B630ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B631	-	XC6103B631ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B632	-	XC6103B632ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B633	-	XC6103B633ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B634	-	XC6103B634ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B635	-	XC6103B635ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B636	-	XC6103B636ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B637	-	XC6103B637ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B638	-	XC6103B638ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B639	-	XC6103B639ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B640	-	XC6103B640ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B641	-	XC6103B641ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B642	-	XC6103B642ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B643	-	XC6103B643ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5B644	-	XC6103B644ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B645	-	XC6103B645ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B646	-	XC6103B646ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B647	-	XC6103B647ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B648	-	XC6103B648ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B649	-	XC6103B649ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B650	-	XC6103B650ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
5B7	-	XC9236A17C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5B7	-	XC9236A17C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5B7	-	XC9236A17CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5B8	-	XC9236A18C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5B8	-	XC9236A18C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5B8	-	XC9236A18CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5B9	-	XC9236A19C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5B9	-	XC9236A19C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5B9	-	XC9236A19CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5BA	-	XC9236A1AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5BA	-	XC9236A1AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5BA	-	XC9236A1ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5BB	-	XC9236A1BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5BB	-	XC9236A1BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5BB	-	XC9236A1BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5BC	-	XC9236A1CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5BC	-	XC9236A1CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5BC	-	XC9236A1CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5BD	-	XC9236A1DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5BD	-	XC9236A1DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5BD	-	XC9236A1DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5BE	-	XC9236A1EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5BE	-	XC9236A1EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5BE	-	XC9236A1ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5BF	-	XC9236A1FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5BF	-	XC9236A1FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5BF	-	XC9236A1FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5BH	-	XC9236A1HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5BH	-	XC9236A1HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5BH	-	XC9236A1HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5BK	-	XC9236A1KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5BK	-	XC9236A1KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5BK	-	XC9236A1KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5BL	-	XC9236A1LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5BL	-	XC9236A1LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5BL	-	XC9236A1LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5BM	-	XC9236A1MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5BM	-	XC9236A1MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5BM	-	XC9236A1MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5C	-	MIC5365-1.0YMT	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	MLF-4	48vm	VR4	9x	Mcr
5C	-	RP101K152B	LVR-IC	LDO, LN, 1.5V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5C	-	RP173K131D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5C	-	RP200K101B	LVR-IC	LDO, 1.0V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5C	-	UNRF2A9	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=1k/10k	ML3	22ta	-	2b	Pan
5C	-	XC6217C13A7R-G	LVR-IC	LDO, 1.35V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5C	-	XC6221D5017R	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
5C	-	XC6223F2219R-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5C0	-	XC9236A20C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5C0	-	XC9236A20C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5C0	-	XC9236A20CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5C1	-	XC9236A21C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5C1	-	XC9236A21C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5C1	-	XC9236A21CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5C2	-	XC9236A22C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5C2	-	XC9236A22C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5C2	-	XC9236A22CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5C200	-	XC6371C200D	DC-DC-IC	PWM step-up, 50kHz, 2.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C201	-	XC6371C201D	DC-DC-IC	PWM step-up, 100kHz, 2.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C202	-	XC6371C202D	DC-DC-IC	PWM step-up, 180kHz, 2.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C210	-	XC6371C210D	DC-DC-IC	PWM step-up, 50kHz, 2.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C211	-	XC6371C211D	DC-DC-IC	PWM step-up, 100kHz, 2.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C212	-	XC6371C212D	DC-DC-IC	PWM step-up, 180kHz, 2.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C216	-	XC6103C216ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5C217	-	XC6103C217ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C218	-	XC6103C218ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C219	-	XC6103C219ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C220	-	XC6103C220ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C220	-	XC6371C220D	DC-DC-IC	PWM step-up, 50kHz, 2.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C221	-	XC6103C221ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C221	-	XC6371C221D	DC-DC-IC	PWM step-up, 100kHz, 2.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C222	-	XC6103C222ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C222	-	XC6371C222D	DC-DC-IC	PWM step-up, 180kHz, 2.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C223	-	XC6103C223ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C224	-	XC6103C224ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C225	-	XC6103C225ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C226	-	XC6103C226ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C227	-	XC6103C227ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C228	-	XC6103C228ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C229	-	XC6103C229ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C230	-	XC6103C230ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C230	-	XC6371C230D	DC-DC-IC	PWM step-up, 50kHz, 2.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C231	-	XC6103C231ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C231	-	XC6371C231D	DC-DC-IC	PWM step-up, 100kHz, 2.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C232	-	XC6103C232ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C232	-	XC6371C232D	DC-DC-IC	PWM step-up, 180kHz, 2.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C233	-	XC6103C233ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C234	-	XC6103C234ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C235	-	XC6103C235ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C236	-	XC6103C236ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C237	-	XC6103C237ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C238	-	XC6103C238ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C239	-	XC6103C239ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C240	-	XC6103C240ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C240	-	XC6371C240D	DC-DC-IC	PWM step-up, 50kHz, 2.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C241	-	XC6103C241ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C241	-	XC6371C241D	DC-DC-IC	PWM step-up, 100kHz, 2.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C242	-	XC6103C242ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C242	-	XC6371C242D	DC-DC-IC	PWM step-up, 180kHz, 2.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C243	-	XC6103C243ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C244	-	XC6103C244ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C245	-	XC6103C245ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C246	-	XC6103C246ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C247	-	XC6103C247ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C248	-	XC6103C248ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C249	-	XC6103C249ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C250	-	XC6103C250ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C250	-	XC6371C250D	DC-DC-IC	PWM step-up, 50kHz, 2.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C251	-	XC6371C251D	DC-DC-IC	PWM step-up, 100kHz, 2.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C252	-	XC6371C252D	DC-DC-IC	PWM step-up, 180kHz, 2.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C260	-	XC6371C260D	DC-DC-IC	PWM step-up, 50kHz, 2.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C261	-	XC6371C261D	DC-DC-IC	PWM step-up, 100kHz, 2.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C262	-	XC6371C262D	DC-DC-IC	PWM step-up, 180kHz, 2.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C270	-	XC6371C270D	DC-DC-IC	PWM step-up, 50kHz, 2.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C271	-	XC6371C271D	DC-DC-IC	PWM step-up, 100kHz, 2.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C272	-	XC6371C272D	DC-DC-IC	PWM step-up, 180kHz, 2.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C280	-	XC6371C280D	DC-DC-IC	PWM step-up, 50kHz, 2.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C281	-	XC6371C281D	DC-DC-IC	PWM step-up, 100kHz, 2.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C282	-	XC6371C282D	DC-DC-IC	PWM step-up, 180kHz, 2.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C290	-	XC6371C290D	DC-DC-IC	PWM step-up, 50kHz, 2.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C291	-	XC6371C291D	DC-DC-IC	PWM step-up, 100kHz, 2.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C292	-	XC6371C292D	DC-DC-IC	PWM step-up, 180kHz, 2.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C3	-	XC9236A23C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5C3	-	XC9236A23C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5C3	-	XC9236A23CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5C300	-	XC6371C300D	DC-DC-IC	PWM step-up, 50kHz, 3.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C301	-	XC6371C301D	DC-DC-IC	PWM step-up, 100kHz, 3.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C302	-	XC6371C302D	DC-DC-IC	PWM step-up, 180kHz, 3.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C310	-	XC6371C310D	DC-DC-IC	PWM step-up, 50kHz, 3.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C311	-	XC6371C311D	DC-DC-IC	PWM step-up, 100kHz, 3.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C312	-	XC6371C312D	DC-DC-IC	PWM step-up, 180kHz, 3.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C316	-	XC6103C316ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C317	-	XC6103C317ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C318	-	XC6103C318ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5C319	-	XC6103C319ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C320	-	XC6103C320ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C320	-	XC6371C320D	DC-DC-IC	PWM step-up, 50kHz, 3.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C321	-	XC6103C321ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C321	-	XC6371C321D	DC-DC-IC	PWM step-up, 100kHz, 3.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C322	-	XC6103C322ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C322	-	XC6371C322D	DC-DC-IC	PWM step-up, 180kHz, 3.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C323	-	XC6103C323ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C324	-	XC6103C324ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C325	-	XC6103C325ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C326	-	XC6103C326ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C327	-	XC6103C327ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C328	-	XC6103C328ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C329	-	XC6103C329ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C330	-	XC6103C330ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C330	-	XC6371C330D	DC-DC-IC	PWM step-up, 50kHz, 3.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C331	-	XC6103C331ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C331	-	XC6371C331D	DC-DC-IC	PWM step-up, 100kHz, 3.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C332	-	XC6103C332ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C332	-	XC6371C332D	DC-DC-IC	PWM step-up, 180kHz, 3.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C333	-	XC6103C333ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C334	-	XC6103C334ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C335	-	XC6103C335ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C336	-	XC6103C336ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C337	-	XC6103C337ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C338	-	XC6103C338ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C339	-	XC6103C339ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C340	-	XC6103C340ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C340	-	XC6371C340D	DC-DC-IC	PWM step-up, 50kHz, 3.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C341	-	XC6103C341ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C341	-	XC6371C341D	DC-DC-IC	PWM step-up, 100kHz, 3.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C342	-	XC6103C342ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C342	-	XC6371C342D	DC-DC-IC	PWM step-up, 180kHz, 3.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C343	-	XC6103C343ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C344	-	XC6103C344ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C345	-	XC6103C345ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C346	-	XC6103C346ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C347	-	XC6103C347ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C348	-	XC6103C348ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C349	-	XC6103C349ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C350	-	XC6103C350ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C350	-	XC6371C350D	DC-DC-IC	PWM step-up, 50kHz, 3.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C351	-	XC6371C351D	DC-DC-IC	PWM step-up, 100kHz, 3.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C352	-	XC6371C352D	DC-DC-IC	PWM step-up, 180kHz, 3.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C360	-	XC6371C360D	DC-DC-IC	PWM step-up, 50kHz, 3.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C361	-	XC6371C361D	DC-DC-IC	PWM step-up, 100kHz, 3.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C362	-	XC6371C362D	DC-DC-IC	PWM step-up, 180kHz, 3.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C370	-	XC6371C370D	DC-DC-IC	PWM step-up, 50kHz, 3.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C371	-	XC6371C371D	DC-DC-IC	PWM step-up, 100kHz, 3.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C372	-	XC6371C372D	DC-DC-IC	PWM step-up, 180kHz, 3.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C380	-	XC6371C380D	DC-DC-IC	PWM step-up, 50kHz, 3.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C381	-	XC6371C381D	DC-DC-IC	PWM step-up, 100kHz, 3.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C382	-	XC6371C382D	DC-DC-IC	PWM step-up, 180kHz, 3.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C390	-	XC6371C390D	DC-DC-IC	PWM step-up, 50kHz, 3.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C391	-	XC6371C391D	DC-DC-IC	PWM step-up, 100kHz, 3.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C392	-	XC6371C392D	DC-DC-IC	PWM step-up, 180kHz, 3.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C4	-	XC9236A24C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5C4	-	XC9236A24C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5C4	-	XC9236A24CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5C400	-	XC6371C400D	DC-DC-IC	PWM step-up, 50kHz, 4.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C401	-	XC6371C401D	DC-DC-IC	PWM step-up, 100kHz, 4.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C402	-	XC6371C402D	DC-DC-IC	PWM step-up, 180kHz, 4.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C410	-	XC6371C410D	DC-DC-IC	PWM step-up, 50kHz, 4.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C411	-	XC6371C411D	DC-DC-IC	PWM step-up, 100kHz, 4.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C412	-	XC6371C412D	DC-DC-IC	PWM step-up, 180kHz, 4.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C416	-	XC6103C416ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C417	-	XC6103C417ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C418	-	XC6103C418ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C419	-	XC6103C419ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C420	-	XC6103C420ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor




SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5C420	-	XC6371C420D	DC-DC-IC	PWM step-up, 50kHz, 4.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C421	-	XC6103C421ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C421	-	XC6371C421D	DC-DC-IC	PWM step-up, 100kHz, 4.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C422	-	XC6103C422ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C422	-	XC6371C422D	DC-DC-IC	PWM step-up, 180kHz, 4.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C423	-	XC6103C423ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C424	-	XC6103C424ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C425	-	XC6103C425ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C426	-	XC6103C426ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C427	-	XC6103C427ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C428	-	XC6103C428ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C429	-	XC6103C429ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C430	-	XC6103C430ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C430	-	XC6371C430D	DC-DC-IC	PWM step-up, 50kHz, 4.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C431	-	XC6103C431ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C431	-	XC6371C431D	DC-DC-IC	PWM step-up, 100kHz, 4.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C432	-	XC6103C432ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C432	-	XC6371C432D	DC-DC-IC	PWM step-up, 180kHz, 4.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C433	-	XC6103C433ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C434	-	XC6103C434ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C435	-	XC6103C435ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C436	-	XC6103C436ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C437	-	XC6103C437ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C438	-	XC6103C438ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C439	-	XC6103C439ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C440	-	XC6103C440ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C440	-	XC6371C440D	DC-DC-IC	PWM step-up, 50kHz, 4.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C441	-	XC6103C441ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C441	-	XC6371C441D	DC-DC-IC	PWM step-up, 100kHz, 4.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C442	-	XC6103C442ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C442	-	XC6371C442D	DC-DC-IC	PWM step-up, 180kHz, 4.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C443	-	XC6103C443ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C444	-	XC6103C444ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C445	-	XC6103C445ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C446	-	XC6103C446ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C447	-	XC6103C447ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C448	-	XC6103C448ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C449	-	XC6103C449ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C450	-	XC6103C450ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C450	-	XC6371C450D	DC-DC-IC	PWM step-up, 50kHz, 4.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C451	-	XC6371C451D	DC-DC-IC	PWM step-up, 100kHz, 4.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C452	-	XC6371C452D	DC-DC-IC	PWM step-up, 180kHz, 4.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C460	-	XC6371C460D	DC-DC-IC	PWM step-up, 50kHz, 4.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C461	-	XC6371C461D	DC-DC-IC	PWM step-up, 100kHz, 4.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C462	-	XC6371C462D	DC-DC-IC	PWM step-up, 180kHz, 4.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C470	-	XC6371C470D	DC-DC-IC	PWM step-up, 50kHz, 4.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C471	-	XC6371C471D	DC-DC-IC	PWM step-up, 100kHz, 4.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C472	-	XC6371C472D	DC-DC-IC	PWM step-up, 180kHz, 4.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C480	-	XC6371C480D	DC-DC-IC	PWM step-up, 50kHz, 4.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C481	-	XC6371C481D	DC-DC-IC	PWM step-up, 100kHz, 4.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C482	-	XC6371C482D	DC-DC-IC	PWM step-up, 180kHz, 4.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C490	-	XC6371C490D	DC-DC-IC	PWM step-up, 50kHz, 4.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C491	-	XC6371C491D	DC-DC-IC	PWM step-up, 100kHz, 4.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C492	-	XC6371C492D	DC-DC-IC	PWM step-up, 180kHz, 4.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C5	-	XC9236A25C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5C5	-	XC9236A25C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5C5	-	XC9236A25CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5C500	-	XC6371C500D	DC-DC-IC	PWM step-up, 50kHz, 5.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C501	-	XC6371C501D	DC-DC-IC	PWM step-up, 100kHz, 5.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C502	-	XC6371C502D	DC-DC-IC	PWM step-up, 180kHz, 5.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C510	-	XC6371C510D	DC-DC-IC	PWM step-up, 50kHz, 5.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C511	-	XC6371C511D	DC-DC-IC	PWM step-up, 100kHz, 5.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C512	-	XC6371C512D	DC-DC-IC	PWM step-up, 180kHz, 5.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C516	-	XC6103C516ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C517	-	XC6103C517ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C518	-	XC6103C518ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C519	-	XC6103C519ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C520	-	XC6103C520ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C520	-	XC6371C520D	DC-DC-IC	PWM step-up, 50kHz, 5.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C521	-	XC6103C521ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5C521	-	XC6371C521D	DC-DC-IC	PWM step-up, 100kHz, 5.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C522	-	XC6103C522ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C522	-	XC6371C522D	DC-DC-IC	PWM step-up, 180kHz, 5.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C523	-	XC6103C523ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C524	-	XC6103C524ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C525	-	XC6103C525ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C526	-	XC6103C526ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C527	-	XC6103C527ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C528	-	XC6103C528ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C529	-	XC6103C529ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C530	-	XC6103C530ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C530	-	XC6371C530D	DC-DC-IC	PWM step-up, 50kHz, 5.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C531	-	XC6103C531ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C531	-	XC6371C531D	DC-DC-IC	PWM step-up, 100kHz, 5.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C532	-	XC6103C532ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C532	-	XC6371C532D	DC-DC-IC	PWM step-up, 180kHz, 5.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C533	-	XC6103C533ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C534	-	XC6103C534ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C535	-	XC6103C535ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C536	-	XC6103C536ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C537	-	XC6103C537ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C538	-	XC6103C538ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C539	-	XC6103C539ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C540	-	XC6103C540ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C540	-	XC6371C540D	DC-DC-IC	PWM step-up, 50kHz, 5.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C541	-	XC6103C541ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C541	-	XC6371C541D	DC-DC-IC	PWM step-up, 100kHz, 5.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C542	-	XC6103C542ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C542	-	XC6371C542D	DC-DC-IC	PWM step-up, 180kHz, 5.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C543	-	XC6103C543ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C544	-	XC6103C544ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C545	-	XC6103C545ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C546	-	XC6103C546ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C547	-	XC6103C547ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C548	-	XC6103C548ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C549	-	XC6103C549ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C550	-	XC6103C550ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C550	-	XC6371C550D	DC-DC-IC	PWM step-up, 50kHz, 5.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C551	-	XC6371C551D	DC-DC-IC	PWM step-up, 100kHz, 5.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C552	-	XC6371C552D	DC-DC-IC	PWM step-up, 180kHz, 5.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C560	-	XC6371C560D	DC-DC-IC	PWM step-up, 50kHz, 5.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C561	-	XC6371C561D	DC-DC-IC	PWM step-up, 100kHz, 5.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C562	-	XC6371C562D	DC-DC-IC	PWM step-up, 180kHz, 5.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C570	-	XC6371C570D	DC-DC-IC	PWM step-up, 50kHz, 5.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C571	-	XC6371C571D	DC-DC-IC	PWM step-up, 100kHz, 5.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C572	-	XC6371C572D	DC-DC-IC	PWM step-up, 180kHz, 5.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C580	-	XC6371C580D	DC-DC-IC	PWM step-up, 50kHz, 5.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C581	-	XC6371C581D	DC-DC-IC	PWM step-up, 100kHz, 5.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C582	-	XC6371C582D	DC-DC-IC	PWM step-up, 180kHz, 5.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C590	-	XC6371C590D	DC-DC-IC	PWM step-up, 50kHz, 5.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C591	-	XC6371C591D	DC-DC-IC	PWM step-up, 100kHz, 5.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C592	-	XC6371C592D	DC-DC-IC	PWM step-up, 180kHz, 5.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C6	-	XC9236A26C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5C6	-	XC9236A26C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5C6	-	XC9236A26CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5C600	-	XC6371C600D	DC-DC-IC	PWM step-up, 50kHz, 6.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C601	-	XC6371C601D	DC-DC-IC	PWM step-up, 100kHz, 6.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C602	-	XC6371C602D	DC-DC-IC	PWM step-up, 180kHz, 6.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C610	-	XC6371C610D	DC-DC-IC	PWM step-up, 50kHz, 6.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C611	-	XC6371C611D	DC-DC-IC	PWM step-up, 100kHz, 6.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C612	-	XC6371C612D	DC-DC-IC	PWM step-up, 180kHz, 6.1V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C616	-	XC6103C616ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C617	-	XC6103C617ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C618	-	XC6103C618ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C619	-	XC6103C619ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C620	-	XC6103C620ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C620	-	XC6371C620D	DC-DC-IC	PWM step-up, 50kHz, 6.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C621	-	XC6103C621ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C621	-	XC6371C621D	DC-DC-IC	PWM step-up, 100kHz, 6.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C622	-	XC6103C622ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5C622	-	XC6371C622D	DC-DC-IC	PWM step-up, 180kHz, 6.2V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C623	-	XC6103C623ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C624	-	XC6103C624ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C625	-	XC6103C625ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C626	-	XC6103C626ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C627	-	XC6103C627ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C628	-	XC6103C628ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C629	-	XC6103C629ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C630	-	XC6103C630ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C630	-	XC6371C630D	DC-DC-IC	PWM step-up, 50kHz, 6.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C631	-	XC6103C631ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C631	-	XC6371C631D	DC-DC-IC	PWM step-up, 100kHz, 6.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C632	-	XC6103C632ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C632	-	XC6371C632D	DC-DC-IC	PWM step-up, 180kHz, 6.3V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C633	-	XC6103C633ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C634	-	XC6103C634ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C635	-	XC6103C635ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C636	-	XC6103C636ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C637	-	XC6103C637ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C638	-	XC6103C638ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C639	-	XC6103C639ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C640	-	XC6103C640ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C640	-	XC6371C640D	DC-DC-IC	PWM step-up, 50kHz, 6.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C641	-	XC6103C641ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C641	-	XC6371C641D	DC-DC-IC	PWM step-up, 100kHz, 6.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C642	-	XC6103C642ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C642	-	XC6371C642D	DC-DC-IC	PWM step-up, 180kHz, 6.4V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C643	-	XC6103C643ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C644	-	XC6103C644ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C645	-	XC6103C645ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C646	-	XC6103C646ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C647	-	XC6103C647ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C648	-	XC6103C648ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C649	-	XC6103C649ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C650	-	XC6103C650ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
5C650	-	XC6371C650D	DC-DC-IC	PWM step-up, 50kHz, 6.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C651	-	XC6371C651D	DC-DC-IC	PWM step-up, 100kHz, 6.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C652	-	XC6371C652D	DC-DC-IC	PWM step-up, 180kHz, 6.5V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C660	-	XC6371C660D	DC-DC-IC	PWM step-up, 50kHz, 6.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C661	-	XC6371C661D	DC-DC-IC	PWM step-up, 100kHz, 6.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C662	-	XC6371C662D	DC-DC-IC	PWM step-up, 180kHz, 6.6V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C670	-	XC6371C670D	DC-DC-IC	PWM step-up, 50kHz, 6.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C671	-	XC6371C671D	DC-DC-IC	PWM step-up, 100kHz, 6.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C672	-	XC6371C672D	DC-DC-IC	PWM step-up, 180kHz, 6.7V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C680	-	XC6371C680D	DC-DC-IC	PWM step-up, 50kHz, 6.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C681	-	XC6371C681D	DC-DC-IC	PWM step-up, 100kHz, 6.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C682	-	XC6371C682D	DC-DC-IC	PWM step-up, 180kHz, 6.8V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C690	-	XC6371C690D	DC-DC-IC	PWM step-up, 50kHz, 6.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C691	-	XC6371C691D	DC-DC-IC	PWM step-up, 100kHz, 6.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C692	-	XC6371C692D	DC-DC-IC	PWM step-up, 180kHz, 6.9V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C7	-	XC9236A27C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5C7	-	XC9236A27C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5C7	-	XC9236A27CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5C700	-	XC6371C700D	DC-DC-IC	PWM step-up, 50kHz, 7.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C701	-	XC6371C701D	DC-DC-IC	PWM step-up, 100kHz, 7.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C702	-	XC6371C702D	DC-DC-IC	PWM step-up, 180kHz, 7.0V±2.5%, 100mA, +CE	USP-6B	49gd	DC3	9b	Tor
5C8	-	XC9236A28C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5C8	-	XC9236A28C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5C8	-	XC9236A28CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5C9	-	XC9236A29C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5C9	-	XC9236A29C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5C9	-	XC9236A29CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5CA	-	XC9236A2AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5CA	-	XC9236A2AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5CA	-	XC9236A2ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5CB	-	XC9236A2BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5CB	-	XC9236A2BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5CB	-	XC9236A2BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5CC	-	XC9236A2CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5CC	-	XC9236A2CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5CC	-	XC9236A2CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5CD	-	XC9236A2DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5CD	-	XC9236A2DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5CD	-	XC9236A2DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5CE	-	XC9236A2EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5CE	-	XC9236A2EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5CE	-	XC9236A2ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5CF	-	XC9236A2FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5CF	-	XC9236A2FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5CF	-	XC9236A2FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5CH	-	XC9236A2HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5CH	-	XC9236A2HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5CH	-	XC9236A2HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5CK	-	XC9236A2KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5CK	-	XC9236A2KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5CK	-	XC9236A2KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5CL	-	XC9236A2LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5CL	-	XC9236A2LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5CL	-	XC9236A2LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5CM	-	XC9236A2MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5CM	-	XC9236A2MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5CM	-	XC9236A2MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5D	-	RP101K182B	LVR-IC	LDO, LN, 1.8V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5D	-	RP173K141D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5D	-	RP200K111B	LVR-IC	LDO, 1.1V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5D	-	XC6217C14A7R-G	LVR-IC	LDO, 1.45V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5D	-	XC6223F2319R-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5D0	-	XC9236A30C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5D0	-	XC9236A30C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5D0	-	XC9236A30CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5D1	-	XC9236A31C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5D1	-	XC9236A31C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5D1	-	XC9236A31CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5D2	-	XC9236A32C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5D2	-	XC9236A32C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5D2	-	XC9236A32CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5D3	-	XC9236A33C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5D3	-	XC9236A33C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5D3	-	XC9236A33CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5D316	-	XC6103D316ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D317	-	XC6103D317ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D318	-	XC6103D318ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D319	-	XC6103D319ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D320	-	XC6103D320ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D321	-	XC6103D321ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D322	-	XC6103D322ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D323	-	XC6103D323ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D324	-	XC6103D324ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D325	-	XC6103D325ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D326	-	XC6103D326ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D327	-	XC6103D327ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D328	-	XC6103D328ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D329	-	XC6103D329ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D330	-	XC6103D330ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D331	-	XC6103D331ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D332	-	XC6103D332ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D333	-	XC6103D333ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D334	-	XC6103D334ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D335	-	XC6103D335ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D336	-	XC6103D336ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D337	-	XC6103D337ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D338	-	XC6103D338ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D339	-	XC6103D339ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D340	-	XC6103D340ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D341	-	XC6103D341ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D342	-	XC6103D342ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D343	-	XC6103D343ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D344	-	XC6103D344ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D345	-	XC6103D345ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D346	-	XC6103D346ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5D347	-	XC6103D347ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D348	-	XC6103D348ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D349	-	XC6103D349ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D350	-	XC6103D350ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D4	-	XC9236A34C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5D4	-	XC9236A34C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5D4	-	XC9236A34CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5D416	-	XC6103D416ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D417	-	XC6103D417ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D418	-	XC6103D418ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D419	-	XC6103D419ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D420	-	XC6103D420ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D421	-	XC6103D421ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D422	-	XC6103D422ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D423	-	XC6103D423ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D424	-	XC6103D424ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D425	-	XC6103D425ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D426	-	XC6103D426ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D427	-	XC6103D427ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D428	-	XC6103D428ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D429	-	XC6103D429ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D430	-	XC6103D430ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D431	-	XC6103D431ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D432	-	XC6103D432ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D433	-	XC6103D433ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D434	-	XC6103D434ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D435	-	XC6103D435ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D436	-	XC6103D436ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D437	-	XC6103D437ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D438	-	XC6103D438ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D439	-	XC6103D439ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D440	-	XC6103D440ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D441	-	XC6103D441ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D442	-	XC6103D442ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D443	-	XC6103D443ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D444	-	XC6103D444ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D445	-	XC6103D445ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D446	-	XC6103D446ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D447	-	XC6103D447ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D448	-	XC6103D448ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D449	-	XC6103D449ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D450	-	XC6103D450ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D5	-	XC9236A35C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5D5	-	XC9236A35C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5D5	-	XC9236A35CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5D516	-	XC6103D516ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D517	-	XC6103D517ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D518	-	XC6103D518ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D519	-	XC6103D519ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D520	-	XC6103D520ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D521	-	XC6103D521ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D522	-	XC6103D522ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D523	-	XC6103D523ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D524	-	XC6103D524ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D525	-	XC6103D525ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D526	-	XC6103D526ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D527	-	XC6103D527ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D528	-	XC6103D528ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D529	-	XC6103D529ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D530	-	XC6103D530ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D531	-	XC6103D531ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D532	-	XC6103D532ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D533	-	XC6103D533ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D534	-	XC6103D534ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D535	-	XC6103D535ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D536	-	XC6103D536ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D537	-	XC6103D537ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D538	-	XC6103D538ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D539	-	XC6103D539ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D540	-	XC6103D540ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5D541	-	XC6103D541ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D542	-	XC6103D542ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D543	-	XC6103D543ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D544	-	XC6103D544ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D545	-	XC6103D545ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D546	-	XC6103D546ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D547	-	XC6103D547ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D548	-	XC6103D548ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D549	-	XC6103D549ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D550	-	XC6103D550ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D6	-	XC9236A36C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5D6	-	XC9236A36C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5D6	-	XC9236A36CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5D616	-	XC6103D616ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D617	-	XC6103D617ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D618	-	XC6103D618ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D619	-	XC6103D619ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D620	-	XC6103D620ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D621	-	XC6103D621ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D622	-	XC6103D622ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D623	-	XC6103D623ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D624	-	XC6103D624ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D625	-	XC6103D625ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D626	-	XC6103D626ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D627	-	XC6103D627ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D628	-	XC6103D628ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D629	-	XC6103D629ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D630	-	XC6103D630ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D631	-	XC6103D631ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D632	-	XC6103D632ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D633	-	XC6103D633ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D634	-	XC6103D634ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D635	-	XC6103D635ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D636	-	XC6103D636ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D637	-	XC6103D637ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D638	-	XC6103D638ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D639	-	XC6103D639ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D640	-	XC6103D640ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D641	-	XC6103D641ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D642	-	XC6103D642ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D643	-	XC6103D643ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D644	-	XC6103D644ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D645	-	XC6103D645ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D646	-	XC6103D646ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D647	-	XC6103D647ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D648	-	XC6103D648ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D649	-	XC6103D649ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D650	-	XC6103D650ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
5D7	-	XC9236A37C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5D7	-	XC9236A37C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5D7	-	XC9236A37CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5D8	-	XC9236A38C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5D8	-	XC9236A38C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5D8	-	XC9236A38CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5D9	-	XC9236A39C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5D9	-	XC9236A39C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5D9	-	XC9236A39CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5DA	-	XC9236A3AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5DA	-	XC9236A3AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5DA	-	XC9236A3ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5DB	-	XC9236A3BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5DB	-	XC9236A3BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5DB	-	XC9236A3BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5DC	-	XC9236A3CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5DC	-	XC9236A3CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5DC	-	XC9236A3CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5DD	-	XC9236A3DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5DD	-	XC9236A3DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5DD	-	XC9236A3DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5DE	-	XC9236A3EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5DE	-	XC9236A3EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5DE	-	XC9236A3ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5DF	-	XC9236A3FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5DF	-	XC9236A3FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5DF	-	XC9236A3FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5DH	-	XC9236A3HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5DH	-	XC9236A3HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5DH	-	XC9236A3HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5DK	-	XC9236A3KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5DK	-	XC9236A3KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5DK	-	XC9236A3KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5DL	-	XC9236A3LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5DL	-	XC9236A3LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5DL	-	XC9236A3LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5DM	-	XC9236A3MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5DM	-	XC9236A3MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5DM	-	XC9236A3MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5E	-	RP101K182B5	LVR-IC	LDO, LN, 1.85V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5E	-	RP173K151D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5E	-	RP200K121B	LVR-IC	LDO, 1.2V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5E	-	XC6217C15A7R-G	LVR-IC	LDO, 1.55V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5E	-	XC6223F2419R-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5E0	-	XC9236A40C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5E0	-	XC9236A40C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5E0	-	XC9236A40CER-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5E200	-	XC6371E200D	DC-DC-IC	PWM step-up, 50kHz, 2.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E201	-	XC6371E201D	DC-DC-IC	PWM step-up, 100kHz, 2.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E202	-	XC6371E202D	DC-DC-IC	PWM step-up, 180kHz, 2.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E210	-	XC6371E210D	DC-DC-IC	PWM step-up, 50kHz, 2.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E211	-	XC6371E211D	DC-DC-IC	PWM step-up, 100kHz, 2.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E212	-	XC6371E212D	DC-DC-IC	PWM step-up, 180kHz, 2.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E220	-	XC6371E220D	DC-DC-IC	PWM step-up, 50kHz, 2.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E221	-	XC6371E221D	DC-DC-IC	PWM step-up, 100kHz, 2.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E222	-	XC6371E222D	DC-DC-IC	PWM step-up, 180kHz, 2.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E230	-	XC6371E230D	DC-DC-IC	PWM step-up, 50kHz, 2.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E231	-	XC6371E231D	DC-DC-IC	PWM step-up, 100kHz, 2.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E232	-	XC6371E232D	DC-DC-IC	PWM step-up, 180kHz, 2.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E240	-	XC6371E240D	DC-DC-IC	PWM step-up, 50kHz, 2.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E241	-	XC6371E241D	DC-DC-IC	PWM step-up, 100kHz, 2.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E242	-	XC6371E242D	DC-DC-IC	PWM step-up, 180kHz, 2.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E250	-	XC6371E250D	DC-DC-IC	PWM step-up, 50kHz, 2.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E251	-	XC6371E251D	DC-DC-IC	PWM step-up, 100kHz, 2.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E252	-	XC6371E252D	DC-DC-IC	PWM step-up, 180kHz, 2.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E260	-	XC6371E260D	DC-DC-IC	PWM step-up, 50kHz, 2.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E261	-	XC6371E261D	DC-DC-IC	PWM step-up, 100kHz, 2.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E262	-	XC6371E262D	DC-DC-IC	PWM step-up, 180kHz, 2.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E270	-	XC6371E270D	DC-DC-IC	PWM step-up, 50kHz, 2.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E271	-	XC6371E271D	DC-DC-IC	PWM step-up, 100kHz, 2.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E272	-	XC6371E272D	DC-DC-IC	PWM step-up, 180kHz, 2.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E280	-	XC6371E280D	DC-DC-IC	PWM step-up, 50kHz, 2.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E281	-	XC6371E281D	DC-DC-IC	PWM step-up, 100kHz, 2.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E282	-	XC6371E282D	DC-DC-IC	PWM step-up, 180kHz, 2.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E290	-	XC6371E290D	DC-DC-IC	PWM step-up, 50kHz, 2.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E291	-	XC6371E291D	DC-DC-IC	PWM step-up, 100kHz, 2.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E292	-	XC6371E292D	DC-DC-IC	PWM step-up, 180kHz, 2.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E300	-	XC6371E300D	DC-DC-IC	PWM step-up, 50kHz, 3.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E301	-	XC6371E301D	DC-DC-IC	PWM step-up, 100kHz, 3.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E302	-	XC6371E302D	DC-DC-IC	PWM step-up, 180kHz, 3.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E310	-	XC6371E310D	DC-DC-IC	PWM step-up, 50kHz, 3.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E311	-	XC6371E311D	DC-DC-IC	PWM step-up, 100kHz, 3.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E312	-	XC6371E312D	DC-DC-IC	PWM step-up, 180kHz, 3.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E320	-	XC6371E320D	DC-DC-IC	PWM step-up, 50kHz, 3.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E321	-	XC6371E321D	DC-DC-IC	PWM step-up, 100kHz, 3.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E322	-	XC6371E322D	DC-DC-IC	PWM step-up, 180kHz, 3.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E330	-	XC6371E330D	DC-DC-IC	PWM step-up, 50kHz, 3.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E331	-	XC6371E331D	DC-DC-IC	PWM step-up, 100kHz, 3.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E332	-	XC6371E332D	DC-DC-IC	PWM step-up, 180kHz, 3.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E340	-	XC6371E340D	DC-DC-IC	PWM step-up, 50kHz, 3.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E341	-	XC6371E341D	DC-DC-IC	PWM step-up, 100kHz, 3.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E342	-	XC6371E342D	DC-DC-IC	PWM step-up, 180kHz, 3.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5E350	-	XC6371E350D	DC-DC-IC	PWM step-up, 50kHz, 3.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E351	-	XC6371E351D	DC-DC-IC	PWM step-up, 100kHz, 3.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E352	-	XC6371E352D	DC-DC-IC	PWM step-up, 180kHz, 3.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E360	-	XC6371E360D	DC-DC-IC	PWM step-up, 50kHz, 3.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E361	-	XC6371E361D	DC-DC-IC	PWM step-up, 100kHz, 3.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E362	-	XC6371E362D	DC-DC-IC	PWM step-up, 180kHz, 3.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E370	-	XC6371E370D	DC-DC-IC	PWM step-up, 50kHz, 3.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E371	-	XC6371E371D	DC-DC-IC	PWM step-up, 100kHz, 3.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E372	-	XC6371E372D	DC-DC-IC	PWM step-up, 180kHz, 3.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E380	-	XC6371E380D	DC-DC-IC	PWM step-up, 50kHz, 3.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E381	-	XC6371E381D	DC-DC-IC	PWM step-up, 100kHz, 3.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E382	-	XC6371E382D	DC-DC-IC	PWM step-up, 180kHz, 3.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E390	-	XC6371E390D	DC-DC-IC	PWM step-up, 50kHz, 3.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E391	-	XC6371E391D	DC-DC-IC	PWM step-up, 100kHz, 3.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E392	-	XC6371E392D	DC-DC-IC	PWM step-up, 180kHz, 3.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E400	-	XC6371E400D	DC-DC-IC	PWM step-up, 50kHz, 4.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E401	-	XC6371E401D	DC-DC-IC	PWM step-up, 100kHz, 4.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E402	-	XC6371E402D	DC-DC-IC	PWM step-up, 180kHz, 4.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E410	-	XC6371E410D	DC-DC-IC	PWM step-up, 50kHz, 4.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E411	-	XC6371E411D	DC-DC-IC	PWM step-up, 100kHz, 4.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E412	-	XC6371E412D	DC-DC-IC	PWM step-up, 180kHz, 4.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E416	-	XC6103E416ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E417	-	XC6103E417ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E418	-	XC6103E418ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E419	-	XC6103E419ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E420	-	XC6103E420ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E420	-	XC6371E420D	DC-DC-IC	PWM step-up, 50kHz, 4.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E421	-	XC6103E421ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E421	-	XC6371E421D	DC-DC-IC	PWM step-up, 100kHz, 4.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E422	-	XC6103E422ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E422	-	XC6371E422D	DC-DC-IC	PWM step-up, 180kHz, 4.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E423	-	XC6103E423ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E424	-	XC6103E424ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E425	-	XC6103E425ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E426	-	XC6103E426ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E427	-	XC6103E427ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E428	-	XC6103E428ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E429	-	XC6103E429ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E430	-	XC6103E430ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E430	-	XC6371E430D	DC-DC-IC	PWM step-up, 50kHz, 4.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E431	-	XC6103E431ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E431	-	XC6371E431D	DC-DC-IC	PWM step-up, 100kHz, 4.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E432	-	XC6103E432ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E432	-	XC6371E432D	DC-DC-IC	PWM step-up, 180kHz, 4.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E433	-	XC6103E433ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E434	-	XC6103E434ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E435	-	XC6103E435ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E436	-	XC6103E436ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E437	-	XC6103E437ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E438	-	XC6103E438ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E439	-	XC6103E439ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E440	-	XC6103E440ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E440	-	XC6371E440D	DC-DC-IC	PWM step-up, 50kHz, 4.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E441	-	XC6103E441ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E441	-	XC6371E441D	DC-DC-IC	PWM step-up, 100kHz, 4.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E442	-	XC6103E442ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E442	-	XC6371E442D	DC-DC-IC	PWM step-up, 180kHz, 4.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E443	-	XC6103E443ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E444	-	XC6103E444ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E445	-	XC6103E445ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E446	-	XC6103E446ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E447	-	XC6103E447ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E448	-	XC6103E448ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E449	-	XC6103E449ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E450	-	XC6103E450ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E450	-	XC6371E450D	DC-DC-IC	PWM step-up, 50kHz, 4.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E451	-	XC6371E451D	DC-DC-IC	PWM step-up, 100kHz, 4.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E452	-	XC6371E452D	DC-DC-IC	PWM step-up, 180kHz, 4.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E460	-	XC6371E460D	DC-DC-IC	PWM step-up, 50kHz, 4.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E461	-	XC6371E461D	DC-DC-IC	PWM step-up, 100kHz, 4.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5E462	-	XC6371E462D	DC-DC-IC	PWM step-up, 180kHz, 4.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E470	-	XC6371E470D	DC-DC-IC	PWM step-up, 50kHz, 4.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E471	-	XC6371E471D	DC-DC-IC	PWM step-up, 100kHz, 4.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E472	-	XC6371E472D	DC-DC-IC	PWM step-up, 180kHz, 4.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E480	-	XC6371E480D	DC-DC-IC	PWM step-up, 50kHz, 4.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E481	-	XC6371E481D	DC-DC-IC	PWM step-up, 100kHz, 4.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E482	-	XC6371E482D	DC-DC-IC	PWM step-up, 180kHz, 4.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E490	-	XC6371E490D	DC-DC-IC	PWM step-up, 50kHz, 4.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E491	-	XC6371E491D	DC-DC-IC	PWM step-up, 100kHz, 4.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E492	-	XC6371E492D	DC-DC-IC	PWM step-up, 180kHz, 4.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E500	-	XC6371E500D	DC-DC-IC	PWM step-up, 50kHz, 5.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E501	-	XC6371E501D	DC-DC-IC	PWM step-up, 100kHz, 5.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E502	-	XC6371E502D	DC-DC-IC	PWM step-up, 180kHz, 5.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E510	-	XC6371E510D	DC-DC-IC	PWM step-up, 50kHz, 5.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E511	-	XC6371E511D	DC-DC-IC	PWM step-up, 100kHz, 5.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E512	-	XC6371E512D	DC-DC-IC	PWM step-up, 180kHz, 5.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E516	-	XC6103E516ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E517	-	XC6103E517ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E518	-	XC6103E518ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E519	-	XC6103E519ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E520	-	XC6103E520ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E520	-	XC6371E520D	DC-DC-IC	PWM step-up, 50kHz, 5.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E521	-	XC6103E521ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E521	-	XC6371E521D	DC-DC-IC	PWM step-up, 100kHz, 5.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E522	-	XC6103E522ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E522	-	XC6371E522D	DC-DC-IC	PWM step-up, 180kHz, 5.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E523	-	XC6103E523ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E524	-	XC6103E524ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E525	-	XC6103E525ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E526	-	XC6103E526ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E527	-	XC6103E527ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E528	-	XC6103E528ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E529	-	XC6103E529ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E530	-	XC6103E530ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E530	-	XC6371E530D	DC-DC-IC	PWM step-up, 50kHz, 5.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E531	-	XC6103E531ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E531	-	XC6371E531D	DC-DC-IC	PWM step-up, 100kHz, 5.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E532	-	XC6103E532ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E532	-	XC6371E532D	DC-DC-IC	PWM step-up, 180kHz, 5.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E533	-	XC6103E533ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E534	-	XC6103E534ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E535	-	XC6103E535ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E536	-	XC6103E536ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E537	-	XC6103E537ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E538	-	XC6103E538ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E539	-	XC6103E539ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E540	-	XC6103E540ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E540	-	XC6371E540D	DC-DC-IC	PWM step-up, 50kHz, 5.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E541	-	XC6103E541ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E541	-	XC6371E541D	DC-DC-IC	PWM step-up, 100kHz, 5.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E542	-	XC6103E542ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E542	-	XC6371E542D	DC-DC-IC	PWM step-up, 180kHz, 5.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E543	-	XC6103E543ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E544	-	XC6103E544ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E545	-	XC6103E545ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E546	-	XC6103E546ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E547	-	XC6103E547ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E548	-	XC6103E548ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E549	-	XC6103E549ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E550	-	XC6103E550ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E550	-	XC6371E550D	DC-DC-IC	PWM step-up, 50kHz, 5.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E551	-	XC6371E551D	DC-DC-IC	PWM step-up, 100kHz, 5.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E552	-	XC6371E552D	DC-DC-IC	PWM step-up, 180kHz, 5.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E560	-	XC6371E560D	DC-DC-IC	PWM step-up, 50kHz, 5.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E561	-	XC6371E561D	DC-DC-IC	PWM step-up, 100kHz, 5.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E562	-	XC6371E562D	DC-DC-IC	PWM step-up, 180kHz, 5.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E570	-	XC6371E570D	DC-DC-IC	PWM step-up, 50kHz, 5.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E571	-	XC6371E571D	DC-DC-IC	PWM step-up, 100kHz, 5.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E572	-	XC6371E572D	DC-DC-IC	PWM step-up, 180kHz, 5.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E580	-	XC6371E580D	DC-DC-IC	PWM step-up, 50kHz, 5.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5E581	-	XC6371E581D	DC-DC-IC	PWM step-up, 100kHz, 5.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E582	-	XC6371E582D	DC-DC-IC	PWM step-up, 180kHz, 5.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E590	-	XC6371E590D	DC-DC-IC	PWM step-up, 50kHz, 5.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E591	-	XC6371E591D	DC-DC-IC	PWM step-up, 100kHz, 5.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E592	-	XC6371E592D	DC-DC-IC	PWM step-up, 180kHz, 5.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E600	-	XC6371E600D	DC-DC-IC	PWM step-up, 50kHz, 6.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E601	-	XC6371E601D	DC-DC-IC	PWM step-up, 100kHz, 6.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E602	-	XC6371E602D	DC-DC-IC	PWM step-up, 180kHz, 6.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E610	-	XC6371E610D	DC-DC-IC	PWM step-up, 50kHz, 6.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E611	-	XC6371E611D	DC-DC-IC	PWM step-up, 100kHz, 6.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E612	-	XC6371E612D	DC-DC-IC	PWM step-up, 180kHz, 6.1V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E616	-	XC6103E616ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E617	-	XC6103E617ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E618	-	XC6103E618ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E619	-	XC6103E619ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E620	-	XC6103E620ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E620	-	XC6371E620D	DC-DC-IC	PWM step-up, 50kHz, 6.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E621	-	XC6103E621ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E621	-	XC6371E621D	DC-DC-IC	PWM step-up, 100kHz, 6.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E622	-	XC6103E622ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E622	-	XC6371E622D	DC-DC-IC	PWM step-up, 180kHz, 6.2V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E623	-	XC6103E623ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E624	-	XC6103E624ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E625	-	XC6103E625ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E626	-	XC6103E626ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E627	-	XC6103E627ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E628	-	XC6103E628ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E629	-	XC6103E629ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E630	-	XC6103E630ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E630	-	XC6371E630D	DC-DC-IC	PWM step-up, 50kHz, 6.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E631	-	XC6103E631ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E631	-	XC6371E631D	DC-DC-IC	PWM step-up, 100kHz, 6.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E632	-	XC6103E632ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E632	-	XC6371E632D	DC-DC-IC	PWM step-up, 180kHz, 6.3V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E633	-	XC6103E633ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E634	-	XC6103E634ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E635	-	XC6103E635ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E636	-	XC6103E636ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E637	-	XC6103E637ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E638	-	XC6103E638ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E639	-	XC6103E639ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E640	-	XC6103E640ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E640	-	XC6371E640D	DC-DC-IC	PWM step-up, 50kHz, 6.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E641	-	XC6103E641ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E641	-	XC6371E641D	DC-DC-IC	PWM step-up, 100kHz, 6.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E642	-	XC6103E642ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E642	-	XC6371E642D	DC-DC-IC	PWM step-up, 180kHz, 6.4V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E643	-	XC6103E643ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E644	-	XC6103E644ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E645	-	XC6103E645ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E646	-	XC6103E646ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E647	-	XC6103E647ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E648	-	XC6103E648ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E649	-	XC6103E649ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E650	-	XC6103E650ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
5E650	-	XC6371E650D	DC-DC-IC	PWM step-up, 50kHz, 6.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E651	-	XC6371E651D	DC-DC-IC	PWM step-up, 100kHz, 6.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E652	-	XC6371E652D	DC-DC-IC	PWM step-up, 180kHz, 6.5V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E660	-	XC6371E660D	DC-DC-IC	PWM step-up, 50kHz, 6.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E661	-	XC6371E661D	DC-DC-IC	PWM step-up, 100kHz, 6.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E662	-	XC6371E662D	DC-DC-IC	PWM step-up, 180kHz, 6.6V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E670	-	XC6371E670D	DC-DC-IC	PWM step-up, 50kHz, 6.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E671	-	XC6371E671D	DC-DC-IC	PWM step-up, 100kHz, 6.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E672	-	XC6371E672D	DC-DC-IC	PWM step-up, 180kHz, 6.7V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E680	-	XC6371E680D	DC-DC-IC	PWM step-up, 50kHz, 6.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E681	-	XC6371E681D	DC-DC-IC	PWM step-up, 100kHz, 6.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E682	-	XC6371E682D	DC-DC-IC	PWM step-up, 180kHz, 6.8V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E690	-	XC6371E690D	DC-DC-IC	PWM step-up, 50kHz, 6.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E691	-	XC6371E691D	DC-DC-IC	PWM step-up, 100kHz, 6.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E692	-	XC6371E692D	DC-DC-IC	PWM step-up, 180kHz, 6.9V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5E700	-	XC6371E700D	DC-DC-IC	PWM step-up, 50kHz, 7.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E701	-	XC6371E701D	DC-DC-IC	PWM step-up, 100kHz, 7.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5E702	-	XC6371E702D	DC-DC-IC	PWM step-up, 180kHz, 7.0V±2.5%, 100mA, int. Vdd	USP-6B	49ge	DC4	9b	Tor
5F	-	MIC5365-1.5YMT	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	MLF-4	48vm	VR4	9x	Mcr
5F	-	RP101K192B	LVR-IC	LDO, LN, 1.9V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5F	-	RP173K161D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5F	-	RP200K131B	LVR-IC	LDO, 1.3V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5F	-	XC6217C16A7R-G	LVR-IC	LDO, 1.65V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5F	-	XC6223F2519R-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5F516	-	XC6103F516ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F517	-	XC6103F517ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F518	-	XC6103F518ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F519	-	XC6103F519ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F520	-	XC6103F520ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F521	-	XC6103F521ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F522	-	XC6103F522ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F523	-	XC6103F523ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F524	-	XC6103F524ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F525	-	XC6103F525ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F526	-	XC6103F526ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F527	-	XC6103F527ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F528	-	XC6103F528ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F529	-	XC6103F529ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F530	-	XC6103F530ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F531	-	XC6103F531ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F532	-	XC6103F532ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F533	-	XC6103F533ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F534	-	XC6103F534ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F535	-	XC6103F535ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F536	-	XC6103F536ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F537	-	XC6103F537ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F538	-	XC6103F538ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F539	-	XC6103F539ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F540	-	XC6103F540ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F541	-	XC6103F541ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F542	-	XC6103F542ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F543	-	XC6103F543ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F544	-	XC6103F544ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F545	-	XC6103F545ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F546	-	XC6103F546ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F547	-	XC6103F547ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F548	-	XC6103F548ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F549	-	XC6103F549ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F550	-	XC6103F550ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F616	-	XC6103F616ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F617	-	XC6103F617ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F618	-	XC6103F618ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F619	-	XC6103F619ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F620	-	XC6103F620ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F621	-	XC6103F621ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F622	-	XC6103F622ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F623	-	XC6103F623ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F624	-	XC6103F624ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F625	-	XC6103F625ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F626	-	XC6103F626ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F627	-	XC6103F627ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F628	-	XC6103F628ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F629	-	XC6103F629ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F630	-	XC6103F630ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F631	-	XC6103F631ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F632	-	XC6103F632ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F633	-	XC6103F633ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F634	-	XC6103F634ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F635	-	XC6103F635ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F636	-	XC6103F636ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F637	-	XC6103F637ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F638	-	XC6103F638ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F639	-	XC6103F639ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F640	-	XC6103F640ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F641	-	XC6103F641ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5F642	-	XC6103F642ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F643	-	XC6103F643ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F644	-	XC6103F644ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F645	-	XC6103F645ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F646	-	XC6103F646ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F647	-	XC6103F647ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F648	-	XC6103F648ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F649	-	XC6103F649ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F650	-	XC6103F650ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
5F8	-	XC9236A08D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5F8	-	XC9236A08D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5F8	-	XC9236A08DER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5F8	-	XCL206A083AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 0.8V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5F9	-	XC9236A09D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5F9	-	XC9236A09D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5F9	-	XC9236A09DER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5F9	-	XCL206A093AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 0.9V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5FL	-	XC9236A0LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5FL	-	XC9236A0LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5FL	-	XC9236A0LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5FL	-	XCL206A0L3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 0.85V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5FM	-	XC9236A0MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5FM	-	XC9236A0MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5FM	-	XC9236A0MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5FM	-	XCL206A0M3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 0.95V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5G	-	MIC5365-1.8YMT	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	MLF-4	48vm	VR4	9x	Mcr
5G	-	RP101K202B	LVR-IC	LDO, LN, 2.0V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5G	-	RP173K171D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5G	-	RP200K141B	LVR-IC	LDO, 1.4V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5H	-	CHBD4148M1PT	Si-diode	Sw, 75V, 150mA, Vf<1V(10mA), 4ns	FBPT-723	17dc	-	9d	Chm
5H	-	CHBD4148T1PT	Si-diode	Sw, 75V, 250mA, Vf<1V(10mA), 4ns	FBPT-723	17dc	-	9d	Chm
5H	-	LD6805K/185H	LVR-IC	LDO, 1.85V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
5H	-	MIC5365-2.0YMT	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	MLF-4	48vm	VR4	9x	Mcr
5H	-	RP101K252B	LVR-IC	LDO, LN, 2.5V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5H	-	RP173K181D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5H	-	RP200K151B	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5H	-	XC6217C17A7R-G	LVR-IC	LDO, 1.75V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5H	-	XC6223F2619R-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5H0	-	XC9236A10D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5H0	-	XC9236A10D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5H0	-	XC9236A10DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5H0	-	XCL206A103AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.0V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5H1	-	XC9236A11D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5H1	-	XC9236A11D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5H1	-	XC9236A11DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5H1	-	XCL206A113AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.1V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5H2	-	XC9236A12D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5H2	-	XC9236A12D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5H2	-	XC9236A12DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5H2	-	XCL206A123AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.2V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5H3	-	XC9236A13D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5H3	-	XC9236A13D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5H3	-	XC9236A13DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5H3	-	XCL206A133AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.3V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5H4	-	XC9236A14D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5H4	-	XC9236A14D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5H4	-	XC9236A14DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5H4	-	XCL206A143AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.4V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5H5	-	XC9236A15D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5H5	-	XC9236A15D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5H5	-	XC9236A15DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5H5	-	XCL206A153AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.5V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5H6	-	XC9236A16D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5H6	-	XC9236A16D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5H6	-	XC9236A16DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5H6	-	XCL206A163AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.6V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5H616	-	XC6103H616ER	Vdet-IC	1.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H617	-	XC6103H617ER	Vdet-IC	1.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H618	-	XC6103H618ER	Vdet-IC	1.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H619	-	XC6103H619ER	Vdet-IC	1.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5H620	-	XC6103H620ER	Vdet-IC	2.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H621	-	XC6103H621ER	Vdet-IC	2.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H622	-	XC6103H622ER	Vdet-IC	2.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H623	-	XC6103H623ER	Vdet-IC	2.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H624	-	XC6103H624ER	Vdet-IC	2.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H625	-	XC6103H625ER	Vdet-IC	2.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H626	-	XC6103H626ER	Vdet-IC	2.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H627	-	XC6103H627ER	Vdet-IC	2.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H628	-	XC6103H628ER	Vdet-IC	2.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H629	-	XC6103H629ER	Vdet-IC	2.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H630	-	XC6103H630ER	Vdet-IC	3.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H631	-	XC6103H631ER	Vdet-IC	3.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H632	-	XC6103H632ER	Vdet-IC	3.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H633	-	XC6103H633ER	Vdet-IC	3.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H634	-	XC6103H634ER	Vdet-IC	3.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H635	-	XC6103H635ER	Vdet-IC	3.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H636	-	XC6103H636ER	Vdet-IC	3.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H637	-	XC6103H637ER	Vdet-IC	3.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H638	-	XC6103H638ER	Vdet-IC	3.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H639	-	XC6103H639ER	Vdet-IC	3.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H640	-	XC6103H640ER	Vdet-IC	4.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H641	-	XC6103H641ER	Vdet-IC	4.1V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H642	-	XC6103H642ER	Vdet-IC	4.2V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H643	-	XC6103H643ER	Vdet-IC	4.3V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H644	-	XC6103H644ER	Vdet-IC	4.4V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H645	-	XC6103H645ER	Vdet-IC	4.5V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H646	-	XC6103H646ER	Vdet-IC	4.6V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H647	-	XC6103H647ER	Vdet-IC	4.7V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H648	-	XC6103H648ER	Vdet-IC	4.8V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H649	-	XC6103H649ER	Vdet-IC	4.9V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H650	-	XC6103H650ER	Vdet-IC	5.0V±2%, Hst, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
5H7	-	XC9236A17D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5H7	-	XC9236A17D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5H7	-	XC9236A17DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5H7	-	XCL206A173AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.7V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5H8	-	XC9236A18D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5H8	-	XC9236A18D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5H8	-	XC9236A18DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5H8	-	XCL206A183AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.8V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5H9	-	XC9236A19D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5H9	-	XC9236A19D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5H9	-	XC9236A19DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5H9	-	XCL206A193AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.9V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5HA	-	XC9236A1AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5HA	-	XC9236A1AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5HA	-	XC9236A1ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5HA	-	XCL206A1A3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.05V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5HB	-	XC9236A1BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5HB	-	XC9236A1BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5HB	-	XC9236A1BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5HB	-	XCL206A1B3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.15V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5HC	-	XC9236A1CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5HC	-	XC9236A1CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5HC	-	XC9236A1CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5HC	-	XCL206A1C3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.25V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5HD	-	XC9236A1DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5HD	-	XC9236A1DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5HD	-	XC9236A1DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5HD	-	XCL206A1D3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.35V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5HE	-	XC9236A1ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5HE	-	XC9236A1ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5HE	-	XC9236A1EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5HE	-	XCL206A1E3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.45V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5HF	-	XC9236A1FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5HF	-	XC9236A1FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5HF	-	XC9236A1FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5HF	-	XCL206A1F3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.55V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5HH	-	XC9236A1HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5HH	-	XC9236A1HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5HH	-	XC9236A1HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5HH	-	XCL206A1H3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.65V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5HK	-	XC9236A1KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5HK	-	XC9236A1KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5HK	-	XC9236A1KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5HK	-	XCL206A1K3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.75V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5HL	-	XC9236A1LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5HL	-	XC9236A1LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5HL	-	XC9236A1LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5HL	-	XCL206A1L3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.85V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5HM	-	XC9236A1MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5HM	-	XC9236A1MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5HM	-	XC9236A1MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5HM	-	XCL206A1M3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.95V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5J	-	MIC5365-2.5YMT	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	MLF-4	48vm	VR4	9x	Mcr
5J	-	RP101K262B	LVR-IC	LDO, LN, 2.6V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5J	-	RP173K181D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5J	-	RP200K161B	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5K	-	MIC5365-2.6YMT	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	MLF-4	48vm	VR4	9x	Mcr
5K	-	RP101K272B	LVR-IC	LDO, LN, 2.7V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5K	-	RP173K191D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5K	-	RP200K171B	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5K	-	UNRF2AF	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=4.7k/10k	ML3	22ta	-	2b	Pan
5K	-	XC6217C18A7R-G	LVR-IC	LDO, 1.85V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5K	-	XC6223F2719R-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5K0	-	XC9236A20D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5K0	-	XC9236A20D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5K0	-	XC9236A20DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5K0	-	XCL206A203AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.0V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5K1	-	XC9236A21D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5K1	-	XC9236A21D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5K1	-	XC9236A21DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5K1	-	XCL206A213AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.1V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5K2	-	XC9236A22D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5K2	-	XC9236A22D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5K2	-	XC9236A22DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5K2	-	XCL206A223AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.2V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5K3	-	XC9236A23D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5K3	-	XC9236A23D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5K3	-	XC9236A23DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5K3	-	XCL206A233AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.3V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5K4	-	XC9236A24D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5K4	-	XC9236A24D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5K4	-	XC9236A24DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5K4	-	XCL206A243AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.4V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5K5	-	XC9236A25D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5K5	-	XC9236A25D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5K5	-	XC9236A25DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5K5	-	XCL206A253AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.5V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5K6	-	XC9236A26D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5K6	-	XC9236A26D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5K6	-	XC9236A26DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5K6	-	XCL206A263AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.6V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5K7	-	XC9236A27D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5K7	-	XC9236A27D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5K7	-	XC9236A27DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5K7	-	XCL206A273AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.7V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5K8	-	XC9236A28D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5K8	-	XC9236A28D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5K8	-	XC9236A28DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5K8	-	XCL206A283AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.8V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5K9	-	XC9236A29D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5K9	-	XC9236A29D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5K9	-	XC9236A29DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5K9	-	XCL206A293AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.9V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5KA	-	XC9236A2AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5KA	-	XC9236A2AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5KA	-	XC9236A2ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5KA	-	XCL206A2A3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.05V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5KB	-	XC9236A2BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5KB	-	XC9236A2BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5KB	-	XC9236A2BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5KB	-	XCL206A2B3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.15V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5KC	-	XC9236A2CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5KC	-	XC9236A2CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5KC	-	XC9236A2CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5KC	-	XCL206A2C3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.25V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5KD	-	XC9236A2DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5KD	-	XC9236A2DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5KD	-	XC9236A2DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5KD	-	XCL206A2D3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.35V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5KE	-	XC9236A2ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5KE	-	XC9236A2ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5KE	-	XC9236A2EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5KE	-	XCL206A2E3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.45V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5KF	-	XC9236A2FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5KF	-	XC9236A2FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5KF	-	XC9236A2FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5KF	-	XCL206A2F3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.55V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5KH	-	XC9236A2HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5KH	-	XC9236A2HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5KH	-	XC9236A2HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5KH	-	XCL206A2H3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.65V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5KK	-	XC9236A2KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5KK	-	XC9236A2KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5KK	-	XC9236A2KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5KK	-	XCL206A2K3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.75V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5KL	-	XC9236A2LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5KL	-	XC9236A2LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5KL	-	XC9236A2LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5KL	-	XCL206A2L3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.85V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5KM	-	XC9236A2MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5KM	-	XC9236A2MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5KM	-	XC9236A2MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5KM	-	XCL206A2M3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.95V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5L	-	MIC5365-2.7YMT	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	MLF-4	48vm	VR4	9x	Mcr
5L	-	RP101K282B	LVR-IC	LDO, LN, 2.8V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5L	-	RP173K201D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5L	-	RP200K181B	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5L	-	UNRF2AK	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=10k/4.7k	ML3	22ta	-	2b	Pan
5L	-	XC6217C19A7R-G	LVR-IC	LDO, 1.95V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5L	-	XC6223F2819R-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5L0	-	XC9236A30D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5L0	-	XC9236A30D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5L0	-	XC9236A30DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5L0	-	XCL206A303AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.0V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5L1	-	XC9236A31D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5L1	-	XC9236A31D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5L1	-	XC9236A31DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5L1	-	XCL206A313AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.1V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5L2	-	XC9236A32D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5L2	-	XC9236A32D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5L2	-	XC9236A32DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5L2	-	XCL206A323AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.2V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5L3	-	XC9236A33D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5L3	-	XC9236A33D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5L3	-	XC9236A33DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5L3	-	XCL206A333AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.3V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5L4	-	XC9236A34D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5L4	-	XC9236A34D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5L4	-	XC9236A34DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5L4	-	XCL206A343AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.4V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5L5	-	XC9236A35D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5L5	-	XC9236A35D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5L5	-	XC9236A35DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5L5	-	XCL206A353AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.5V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5L6	-	XC9236A36D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5L6	-	XC9236A36D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5L6	-	XC9236A36DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5L6	-	XCL206A363AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.6V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5L7	-	XC9236A37D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5L7	-	XC9236A37D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5L7	-	XC9236A37DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5L7	-	XCL206A373AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.7V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5L8	-	XC9236A38D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5L8	-	XC9236A38D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5L8	-	XC9236A38DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5L8	-	XCL206A383AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.8V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5L9	-	XC9236A39D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5L9	-	XC9236A39D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5L9	-	XC9236A39DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5L9	-	XCL206A393AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.9V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5LA	-	XC9236A3AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5LA	-	XC9236A3AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5LA	-	XC9236A3ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5LA	-	XCL206A3A3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.05V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5LB	-	XC9236A3BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5LB	-	XC9236A3BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5LB	-	XC9236A3BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5LB	-	XCL206A3B3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.15V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5LC	-	XC9236A3CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5LC	-	XC9236A3CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5LC	-	XC9236A3CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5LC	-	XCL206A3C3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.25V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5LD	-	XC9236A3DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5LD	-	XC9236A3DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5LD	-	XC9236A3DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5LD	-	XCL206A3D3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.35V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5LE	-	XC9236A3ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5LE	-	XC9236A3ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5LE	-	XC9236A3EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5LE	-	XCL206A3E3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.45V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5LF	-	XC9236A3FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5LF	-	XC9236A3FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5LF	-	XC9236A3FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5LF	-	XCL206A3F3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.55V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5LH	-	XC9236A3HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5LH	-	XC9236A3HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5LH	-	XC9236A3HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5LH	-	XCL206A3H3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.65V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5LK	-	XC9236A3KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5LK	-	XC9236A3KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5LK	-	XC9236A3KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5LK	-	XCL206A3K3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.75V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5LL	-	XC9236A3LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5LL	-	XC9236A3LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5LL	-	XC9236A3LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5LL	-	XCL206A3L3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.85V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5LM	-	XC9236A3MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5LM	-	XC9236A3MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5LM	-	XC9236A3MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5LM	-	XCL206A3M3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.95V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5M	-	MIC5365-2.8YMT	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	MLF-4	48vm	VR4	9x	Mcr
5M	-	RP101K282B5	LVR-IC	LDO, LN, 2.85V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5M	-	RP173K211D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5M	-	RP200K191B	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5M	-	XC6217C20A7R-G	LVR-IC	LDO, 2.05V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5M	-	XC6223F2919R-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5M0	-	XC9236A40D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
5M0	-	XC9236A40D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
5M0	-	XC9236A40DER-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
5M0	-	XCL206A403AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 4.0V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
5N	-	MIC5365-2.85YMT	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	MLF-4	48vm	VR4	9x	Mcr
5N	-	MIC5365-2.85YMT	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	MLF-4	48vm	VR4	9x	Mcr
5N	-	RP101K292B	LVR-IC	LDO, LN, 2.9V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5N	-	RP173K221D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5N	-	RP200K201B	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5N	-	UNRF2AT	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=22k/47k	ML3	22ta	-	2b	Pan
5N	-	XC6217C21A7R-G	LVR-IC	LDO, 2.15V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5N	-	XC6223F3019R-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5N8	-	XC9236E08C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5N8	-	XC9236E08C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5N8	-	XC9236E08CER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5N9	-	XC9236E09C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5N9	-	XC9236E09C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5N9	-	XC9236E09CER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5NL	-	XC9236E0LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5NL	-	XC9236E0LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5NL	-	XC9236E0LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5NM	-	XC9236E0MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5NM	-	XC9236E0MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5NM	-	XC9236E0MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5O	-	MIC5365-2.9YMT	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	MLF-4	48vm	VR4	9x	Mcr
5P	-	MIC5365-3.0YMT	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	MLF-4	48vm	VR4	9x	Mcr
5P	-	RP101K302B	LVR-IC	LDO, LN, 3.0V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5P	-	RP173K231D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5P	-	RP200K211B	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5P	-	UNRF2AV	Si-npn-Digi	Sw, 50V, 80mA, 100mW, 150MHz, R1/R2=2.2k/2.2k	ML3	22ta	-	2b	Pan
5P	-	XC6217C22A7R-G	LVR-IC	LDO, 2.25V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5P	-	XC6223F3119R-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5P0	-	XC9236E10C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5P0	-	XC9236E10C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5P0	-	XC9236E10CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5P1	-	XC9236E11C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5P1	-	XC9236E11C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5P1	-	XC9236E11CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5P2	-	XC9236E12C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5P2	-	XC9236E12C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5P2	-	XC9236E12CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5P3	-	XC9236E13C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5P3	-	XC9236E13C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5P3	-	XC9236E13CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5P4	-	XC9236E14C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5P4	-	XC9236E14C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5P4	-	XC9236E14CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5P5	-	XC9236E15C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5P5	-	XC9236E15C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5P5	-	XC9236E15CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5P6	-	XC9236E16C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5P6	-	XC9236E16C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5P6	-	XC9236E16CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5P7	-	XC9236E17C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5P7	-	XC9236E17C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5P7	-	XC9236E17CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5P8	-	XC9236E18C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5P8	-	XC9236E18C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5P8	-	XC9236E18CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5P9	-	XC9236E19C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5P9	-	XC9236E19C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5P9	-	XC9236E19CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5PA	-	XC9236E1AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5PA	-	XC9236E1AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5PA	-	XC9236E1ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5PB	-	XC9236E1BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5PB	-	XC9236E1BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5PB	-	XC9236E1BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5PC	-	XC9236E1CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5PC	-	XC9236E1CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5PC	-	XC9236E1CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5PD	-	XC9236E1DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5PD	-	XC9236E1DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5PD	-	XC9236E1DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5PE	-	XC9236E1EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5PE	-	XC9236E1EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5PE	-	XC9236E1ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5PF	-	XC9236E1FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5PF	-	XC9236E1FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5PF	-	XC9236E1FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5PH	-	XC9236E1HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5PH	-	XC9236E1HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5PH	-	XC9236E1HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5PK	-	XC9236E1KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5PK	-	XC9236E1KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5PK	-	XC9236E1KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5PL	-	XC9236E1LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5PL	-	XC9236E1LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5PL	-	XC9236E1LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5PM	-	XC9236E1MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5PM	-	XC9236E1MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5PM	-	XC9236E1MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5Q	-	MIC5365-3.1YMT	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	MLF-4	48vm	VR4	9x	Mcr
5Q	-	RP101K312B	LVR-IC	LDO, LN, 3.1V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5Q	-	RP173K241D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5Q	-	RP200K221B	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5R	-	RP101K332B	LVR-IC	LDO, LN, 3.3V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5R	-	RP173K251D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5R	-	RP200K231B	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5R	-	XC6217C23A7R-G	LVR-IC	LDO, 2.35V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5R	-	XC6223F3219R-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5R0	-	XC9236E20C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5R0	-	XC9236E20C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5R0	-	XC9236E20CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5R1	-	XC9236E21C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5R1	-	XC9236E21C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5R1	-	XC9236E21CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5R2	-	XC9236E22C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5R2	-	XC9236E22C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5R2	-	XC9236E22CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5R3	-	XC9236E23C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5R3	-	XC9236E23C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5R3	-	XC9236E23CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5R4	-	XC9236E24C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5R4	-	XC9236E24C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5R4	-	XC9236E24CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5R5	-	XC9236E25C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5R5	-	XC9236E25C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5R5	-	XC9236E25CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5R6	-	XC9236E26C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5R6	-	XC9236E26C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5R6	-	XC9236E26CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5R7	-	XC9236E27C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5R7	-	XC9236E27C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5R7	-	XC9236E27CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5R8	-	XC9236E28C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5R8	-	XC9236E28C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5R8	-	XC9236E28CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5R9	-	XC9236E29C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5R9	-	XC9236E29C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5R9	-	XC9236E29CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5RA	-	XC9236E2AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5RA	-	XC9236E2AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5RA	-	XC9236E2ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5RB	-	XC9236E2BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5RB	-	XC9236E2BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5RB	-	XC9236E2BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5RC	-	XC9236E2CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5RC	-	XC9236E2CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5RC	-	XC9236E2CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5RD	-	XC9236E2DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5RD	-	XC9236E2DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5RD	-	XC9236E2DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5RE	-	XC9236E2EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5RE	-	XC9236E2EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5RE	-	XC9236E2ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5RF	-	XC9236E2FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5RF	-	XC9236E2FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5RF	-	XC9236E2FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5RH	-	XC9236E2HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5RH	-	XC9236E2HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5RH	-	XC9236E2HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5RK	-	XC9236E2KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5RK	-	XC9236E2KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5RK	-	XC9236E2KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5RL	-	XC9236E2LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5RL	-	XC9236E2LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5RL	-	XC9236E2LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5RM	-	XC9236E2MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5RM	-	XC9236E2MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5RM	-	XC9236E2MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5S	-	MIC5365-3.3YMT	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	MLF-4	48vm	VR4	9x	Mcr
5S	-	RP101K212B	LVR-IC	LDO, LN, 2.1V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5S	-	RP173K261D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5S	-	RP200K241B	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5S	-	XC6217C24A7R-G	LVR-IC	LDO, 2.45V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5S	-	XC6223F3319R-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5S0	-	XC9236E30C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5S0	-	XC9236E30C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5S0	-	XC9236E30CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5S1	-	XC9236E31C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5S1	-	XC9236E31C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5S1	-	XC9236E31CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5S2	-	XC9236E32C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5S2	-	XC9236E32C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5S2	-	XC9236E32CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5S3	-	XC9236E33C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5S3	-	XC9236E33C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5S3	-	XC9236E33CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5S4	-	XC9236E34C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5S4	-	XC9236E34C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5S4	-	XC9236E34CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5S5	-	XC9236E35C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5S5	-	XC9236E35C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5S5	-	XC9236E35CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5S6	-	XC9236E36C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5S6	-	XC9236E36C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5S6	-	XC9236E36CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5S7	-	XC9236E37C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5S7	-	XC9236E37C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5S7	-	XC9236E37CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5S8	-	XC9236E38C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5S8	-	XC9236E38C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5S8	-	XC9236E38CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5S9	-	XC9236E39C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5S9	-	XC9236E39C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5S9	-	XC9236E39CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5SA	-	XC9236E3AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5SA	-	XC9236E3AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5SA	-	XC9236E3ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5SB	-	XC9236E3BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5SB	-	XC9236E3BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5SB	-	XC9236E3BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5SC	-	XC9236E3CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5SC	-	XC9236E3CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5SC	-	XC9236E3CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5SD	-	XC9236E3DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5SD	-	XC9236E3DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5SD	-	XC9236E3DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5SE	-	XC9236E3EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5SE	-	XC9236E3EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5SE	-	XC9236E3ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5SF	-	XC9236E3FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5SF	-	XC9236E3FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5SF	-	XC9236E3FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5SH	-	XC9236E3HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5SH	-	XC9236E3HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5SH	-	XC9236E3HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5SK	-	XC9236E3KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5SK	-	XC9236E3KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5SK	-	XC9236E3KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5SL	-	XC9236E3LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5SL	-	XC9236E3LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5SL	-	XC9236E3LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5SM	-	XC9236E3MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5SM	-	XC9236E3MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5SM	-	XC9236E3MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5T	-	RP101K232B	LVR-IC	LDO, LN, 2.2V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5T	-	RP173K271D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5T	-	RP200K251B	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5T	-	XC6217C25A7R-G	LVR-IC	LDO, 2.55V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5T	-	XC6223F3419R-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5T0	-	XC9236E40C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5T0	-	XC9236E40C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5T0	-	XC9236E40CER-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5U	-	RP101K242B	LVR-IC	LDO, LN, 2.3V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5U	-	RP173K281D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5U	-	RP200K261B	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5U	-	XC6217C26A7R-G	LVR-IC	LDO, 2.65V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5U	-	XC6223F3519R-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5U8	-	XC9236E08D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5U8	-	XC9236E08D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5U8	-	XC9236E08DER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5U9	-	XC9236E09D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5U9	-	XC9236E09D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5U9	-	XC9236E09DER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5UL	-	XC9236E0LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5UL	-	XC9236E0LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5UL	-	XC9236E0LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5UM	-	XC9236E0MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5UM	-	XC9236E0MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5UM	-	XC9236E0MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5V	-	RP101K322B	LVR-IC	LDO, LN, 2.4V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5V	-	RP173K281D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5V	-	RP200K271B	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5V	-	XC6217C27A7R-G	LVR-IC	LDO, 2.75V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5V	-	XC6223F3619R-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5V0	-	XC9236E10D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5V0	-	XC9236E10D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5V0	-	XC9236E10DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5V1	-	XC9236E11D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5V1	-	XC9236E11D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5V1	-	XC9236E11DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5V2	-	XC9236E12D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5V2	-	XC9236E12D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5V2	-	XC9236E12DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5V3	-	XC9236E13D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5V3	-	XC9236E13D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5V3	-	XC9236E13DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5V4	-	XC9236E14D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5V4	-	XC9236E14D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5V4	-	XC9236E14DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5V5	-	XC9236E15D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5V5	-	XC9236E15D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5V5	-	XC9236E15DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5V6	-	XC9236E16D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5V6	-	XC9236E16D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5V6	-	XC9236E16DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5V7	-	XC9236E17D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5V7	-	XC9236E17D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5V7	-	XC9236E17DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5V8	-	XC9236E18D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5V8	-	XC9236E18D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5V8	-	XC9236E18DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5V9	-	XC9236E19D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5V9	-	XC9236E19D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5V9	-	XC9236E19DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5VA	-	XC9236E1AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5VA	-	XC9236E1AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5VA	-	XC9236E1ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5VB	-	XC9236E1BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5VB	-	XC9236E1BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5VB	-	XC9236E1BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5VC	-	XC9236E1CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5VC	-	XC9236E1CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5VC	-	XC9236E1CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5VD	-	XC9236E1DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5VD	-	XC9236E1DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5VD	-	XC9236E1DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5VE	-	XC9236E1ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5VE	-	XC9236E1ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5VE	-	XC9236E1EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5VF	-	XC9236E1FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5VF	-	XC9236E1FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5VF	-	XC9236E1FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5VH	-	XC9236E1HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5VH	-	XC9236E1HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5VH	-	XC9236E1HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5VK	-	XC9236E1KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5VK	-	XC9236E1KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5VK	-	XC9236E1KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5VL	-	XC9236E1LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5VL	-	XC9236E1LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5VL	-	XC9236E1LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5VM	-	XC9236E1MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5VM	-	XC9236E1MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5VM	-	XC9236E1MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5W	-	RP101K222B	LVR-IC	LDO, LN, 2.2V±0.8%, 300mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
5W	-	RP173K291D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5W	-	RP200K281B	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5X	-	RP173K301D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5X	-	RP200K291B	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5X	-	XC6217C28A7R-G	LVR-IC	LDO, 2.85V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5X	-	XC6223F3719R-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5X0	-	XC9236E20D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5X0	-	XC9236E20D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5X0	-	XC9236E20DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5X1	-	XC9236E21D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5X1	-	XC9236E21D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5X1	-	XC9236E21DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5X2	-	XC9236E22D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5X2	-	XC9236E22D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5X2	-	XC9236E22DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5X3	-	XC9236E23D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5X3	-	XC9236E23D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5X3	-	XC9236E23DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5X4	-	XC9236E24D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5X4	-	XC9236E24D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5X4	-	XC9236E24DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5X5	-	XC9236E25D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5X5	-	XC9236E25D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5X5	-	XC9236E25DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5X6	-	XC9236E26D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5X6	-	XC9236E26D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5X6	-	XC9236E26DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5X7	-	XC9236E27D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5X7	-	XC9236E27D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5X7	-	XC9236E27DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5X8	-	XC9236E28D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5X8	-	XC9236E28D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5X8	-	XC9236E28DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5X9	-	XC9236E29D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5X9	-	XC9236E29D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5X9	-	XC9236E29DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5XA	-	XC9236E2AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5XA	-	XC9236E2AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5XA	-	XC9236E2ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5XB	-	XC9236E2BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5XB	-	XC9236E2BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5XB	-	XC9236E2BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5XC	-	XC9236E2CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5XC	-	XC9236E2CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5XC	-	XC9236E2CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5XD	-	XC9236E2DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5XD	-	XC9236E2DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5XD	-	XC9236E2DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5XE	-	XC9236E2ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5XE	-	XC9236E2ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5XE	-	XC9236E2EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5XF	-	XC9236E2FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5XF	-	XC9236E2FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5XF	-	XC9236E2FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5XH	-	XC9236E2HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5XH	-	XC9236E2HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5XH	-	XC9236E2HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5XK	-	XC9236E2KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5XK	-	XC9236E2KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5XK	-	XC9236E2KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5XL	-	XC9236E2LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5XL	-	XC9236E2LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5XL	-	XC9236E2LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5XM	-	XC9236E2MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5XM	-	XC9236E2MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5XM	-	XC9236E2MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5Y	-	RP173K311D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5Y	-	RP200K301B	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5Y	-	XC6217C29A7R-G	LVR-IC	LDO, 2.95V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5Y	-	XC6223F3819R-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5Y0	-	XC9236E30D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5Y0	-	XC9236E30D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5Y0	-	XC9236E30DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5Y1	-	XC9236E31D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5Y1	-	XC9236E31D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5Y1	-	XC9236E31DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5Y2	-	XC9236E32D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5Y2	-	XC9236E32D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5Y2	-	XC9236E32DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5Y3	-	XC9236E33D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5Y3	-	XC9236E33D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5Y3	-	XC9236E33DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5Y4	-	XC9236E34D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5Y4	-	XC9236E34D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5Y4	-	XC9236E34DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5Y5	-	XC9236E35D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5Y5	-	XC9236E35D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5Y5	-	XC9236E35DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5Y6	-	XC9236E36D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5Y6	-	XC9236E36D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5Y6	-	XC9236E36DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5Y7	-	XC9236E37D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5Y7	-	XC9236E37D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5Y7	-	XC9236E37DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5Y8	-	XC9236E38D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5Y8	-	XC9236E38D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5Y8	-	XC9236E38DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5Y9	-	XC9236E39D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5Y9	-	XC9236E39D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5Y9	-	XC9236E39DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5YA	-	XC9236E3AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5YA	-	XC9236E3AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5YA	-	XC9236E3ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5YB	-	XC9236E3BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5YB	-	XC9236E3BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5YB	-	XC9236E3BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5YC	-	XC9236E3CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5YC	-	XC9236E3CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5YC	-	XC9236E3CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5YD	-	XC9236E3DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5YD	-	XC9236E3DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5YD	-	XC9236E3DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5YE	-	XC9236E3ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5YE	-	XC9236E3ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5YE	-	XC9236E3EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
5YF	-	XC9236E3FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5YF	-	XC9236E3FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5YF	-	XC9236E3FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5YH	-	XC9236E3HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5YH	-	XC9236E3HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5YH	-	XC9236E3HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5YK	-	XC9236E3KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5YK	-	XC9236E3KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5YK	-	XC9236E3KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5YL	-	XC9236E3LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5YL	-	XC9236E3LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5YL	-	XC9236E3LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5YM	-	XC9236E3MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5YM	-	XC9236E3MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5YM	-	XC9236E3MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
5Z	-	RP173K321D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
5Z	-	RP200K311B	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
5Z	-	XC6217C30A7R-G	LVR-IC	LDO, 3.05V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
5Z	-	XC6223F3919R-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
5Z0	-	XC9236E40D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
5Z0	-	XC9236E40D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
5Z0	-	XC9236E40DER-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
60	-	RP110L331C	LVR-IC	LDO, 3.3V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
60	-	XC6217C31A7R-G	LVR-IC	LDO, 3.15V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
6020A2	-	TPA6020A2RGW	Lin-IC	AF PA, BTL, 2.5..5.5V, 2x2.8W(5V/4Ω), shutdown	QFN-20	38	-	9a	Ti
61	-	RP110L341C	LVR-IC	LDO, 3.4V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
61	-	XC6217C32A7R-G	LVR-IC	LDO, 3.25V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
6105	-	BL6105LQ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 1.4W(5V/4Ω), shutdown	DFN-8	92	AFP24	9a	Shb
6110	-	BL6110TLX	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.8W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Shb
6112	-	BL6112LQ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x2.1W(5V/4Ω), shutdown	QFN-20	38	-	9a	Shb
6112	-	BL6112TLX	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x2.1W(5V/4Ω), shutdown	BGA-16	39	AFP46	9a	Shb
6190D	-	CS6190D	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), shutdown	DFN-8 3x3	65	-	9a	Cme
6190T	-	CS6190T	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), shutdown	DFN-8 2x2	65	-	9a	Cme
62	-	BAT62-07L4	Si-diode	Dual, Schottky, 40V, 20mA, Vf<1.0V, Cd<0.6pF	TSLP-4-4	31ce	-	2b	Inf
62	-	RP110L351C	LVR-IC	LDO, 3.5V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
62	-	TS4962MEIJT	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 3W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Ste
62	-	XC6217C33A7R-G	LVR-IC	LDO, 3.35V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
62	-	XC6223G1219R-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6205	-	EUA6205J	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	TDFN-8	37	AFP22	9a	Eut
6214A	-	EUA6214AJ	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.7W(5V/8Ω), shutdown	TDFN-8	37	AFP22	9a	Eut
63	-	ADP150ACBZ-2.6-R7	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	CB-4-3	63bc*	VR4	9a	Ad
63	-	RP110L361C	LVR-IC	LDO, 3.6V±1%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
63	-	XC6217C34A7R-G	LVR-IC	LDO, 3.45V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
63	-	XC6223G1319R-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6335	-	MS6335Q	Lin-IC	16-bit DAC, AF PA 2x52mW(5V/32Ω), mute, I2C	QFN-16	38	-	9a	Mos
6337	-	MS6337Q	Lin-IC	16-bit DAC, AF PA 1.8W(5V/4Ω), mute, I2C	QFN-24	38	-	9a	Mos
64	-	MIC5366-1.2YMT	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, CL autodischarge	MLF-4	48vm	VR4	9x	Mcr
64	-	RP110L081D	LVR-IC	LDO, 0.8V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
64	-	XC6217C35A7R-G	LVR-IC	LDO, 3.55V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
64	-	XC6221D12B7R	LVR-IC	LDO, 1.25V±20mV, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
64	-	XC6223G1419R-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
65	-	MIC5366-1.3YMT	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, CL autodischarge	MLF-4	48vm	VR4	9x	Mcr
65	-	RP110L091D	LVR-IC	LDO, 0.9V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
65	-	XC6217C36A7R-G	LVR-IC	LDO, 3.65V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
65	-	XC6221D13B7R	LVR-IC	LDO, 1.35V±20mV, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
65	-	XC6223G1519R-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
66	-	PDTC144VM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/10k	SOT-883	22ta	-	2b	Nxp
66	-	RP110L101D	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
66	-	XC6217C37A7R-G	LVR-IC	LDO, 3.75V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
66	-	XC6221D14B7R	LVR-IC	LDO, 1.45V±20mV, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
66	-	XC6223G1619R-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
67	-	RP110L111D	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
67	-	XC6217C38A7R-G	LVR-IC	LDO, 3.85V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
67	-	XC6221D15B7R	LVR-IC	LDO, 1.55V±20mV, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
67	-	XC6223G1719R-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
68	-	RP110L121D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
68	-	XC6217C39A7R-G	LVR-IC	LDO, 3.95V±2%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
68	-	XC6221D16B7R	LVR-IC	LDO, 1.65V±20mV, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
68	-	XC6223G1819R-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6871	-	HT6871CR	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/4Ω), shutdown	BGA-9	39	-	9a	Hrc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
69	-	RP110L121D5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
69	-	XC6221D17B7R	LVR-IC	LDO, 1.75V±20mV, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
69	-	XC6223G1919R-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
691811	-	LD6918GDGW-11	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
691812	-	LD6918GDGW-12	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
691813	-	LD6918GDGW-13	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
691814	-	LD6918GDGW-14	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181H	-	LD6918GDGW-1H	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181I	-	LD6918GDGW-1I	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181J	-	LD6918GDGW-1J	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181K	-	LD6918GDGW-1K	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181L	-	LD6918GDGW-1L	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181M	-	LD6918GDGW-1M	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181N	-	LD6918GDGW-1N	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181O	-	LD6918GDGW-1O	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181P	-	LD6918GDGW-1P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181Q	-	LD6918GDGW-1Q	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181R	-	LD6918GDGW-1R	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181S	-	LD6918GDGW-1S	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181T	-	LD6918GDGW-1T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181U	-	LD6918GDGW-1U	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181V	-	LD6918GDGW-1V	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181W	-	LD6918GDGW-1W	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181X	-	LD6918GDGW-1X	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181Y	-	LD6918GDGW-1Y	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69181Z	-	LD6918GDGW-1Z	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
691821	-	LD6918GDGW-21	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
691822	-	LD6918GDGW-22	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
691823	-	LD6918GDGW-23	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
691824	-	LD6918GDGW-24	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182H	-	LD6918GDGW-2H	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182I	-	LD6918GDGW-2I	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182J	-	LD6918GDGW-2J	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182K	-	LD6918GDGW-2K	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182L	-	LD6918GDGW-2L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182M	-	LD6918GDGW-2M	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182N	-	LD6918GDGW-2N	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182O	-	LD6918GDGW-2O	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182P	-	LD6918GDGW-2P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182Q	-	LD6918GDGW-2Q	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182R	-	LD6918GDGW-2R	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182S	-	LD6918GDGW-2S	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182T	-	LD6918GDGW-2T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182U	-	LD6918GDGW-2U	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182V	-	LD6918GDGW-2V	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182W	-	LD6918GDGW-2W	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182X	-	LD6918GDGW-2X	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182Y	-	LD6918GDGW-2Y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69182Z	-	LD6918GDGW-2Z	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
691831	-	LD6918GDGW-31	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
691832	-	LD6918GDGW-32	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
691833	-	LD6918GDGW-33	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
691834	-	LD6918GDGW-34	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183H	-	LD6918GDGW-3H	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183I	-	LD6918GDGW-3I	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183J	-	LD6918GDGW-3J	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183K	-	LD6918GDGW-3K	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183L	-	LD6918GDGW-3L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183M	-	LD6918GDGW-3M	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183N	-	LD6918GDGW-3N	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183O	-	LD6918GDGW-3O	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183P	-	LD6918GDGW-3P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183Q	-	LD6918GDGW-3Q	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183R	-	LD6918GDGW-3R	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183S	-	LD6918GDGW-3S	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183T	-	LD6918GDGW-3T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183U	-	LD6918GDGW-3U	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183V	-	LD6918GDGW-3V	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183W	-	LD6918GDGW-3W	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183X	-	LD6918GDGW-3X	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
69183Y	-	LD6918GDGW-3Y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69183Z	-	LD6918GDGW-3Z	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
691841	-	LD6918GDGW-41	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
691842	-	LD6918GDGW-42	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
691843	-	LD6918GDGW-43	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
691844	-	LD6918GDGW-44	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184H	-	LD6918GDGW-4H	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184I	-	LD6918GDGW-4I	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184J	-	LD6918GDGW-4J	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184K	-	LD6918GDGW-4K	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184L	-	LD6918GDGW-4L	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184M	-	LD6918GDGW-4M	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184N	-	LD6918GDGW-4N	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184O	-	LD6918GDGW-4O	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184P	-	LD6918GDGW-4P	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184Q	-	LD6918GDGW-4Q	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184R	-	LD6918GDGW-4R	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184S	-	LD6918GDGW-4S	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184T	-	LD6918GDGW-4T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184U	-	LD6918GDGW-4U	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184V	-	LD6918GDGW-4V	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184W	-	LD6918GDGW-4W	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184X	-	LD6918GDGW-4X	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184Y	-	LD6918GDGW-4Y	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
69184Z	-	LD6918GDGW-4Z	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918H1	-	LD6918GDGW-H1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918H2	-	LD6918GDGW-H2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918H3	-	LD6918GDGW-H3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918H4	-	LD6918GDGW-H4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HH	-	LD6918GDGW-HH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HI	-	LD6918GDGW-HI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HJ	-	LD6918GDGW-HJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HK	-	LD6918GDGW-HK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HL	-	LD6918GDGW-HL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HM	-	LD6918GDGW-HM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HN	-	LD6918GDGW-HN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HO	-	LD6918GDGW-HO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HP	-	LD6918GDGW-HP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HQ	-	LD6918GDGW-HQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HR	-	LD6918GDGW-HR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HS	-	LD6918GDGW-HS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HT	-	LD6918GDGW-HT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HU	-	LD6918GDGW-HU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HV	-	LD6918GDGW-HV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HW	-	LD6918GDGW-HW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HX	-	LD6918GDGW-HX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HY	-	LD6918GDGW-HY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918HZ	-	LD6918GDGW-HZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918I1	-	LD6918GDGW-I1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918I2	-	LD6918GDGW-I2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918I3	-	LD6918GDGW-I3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918I4	-	LD6918GDGW-I4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IH	-	LD6918GDGW-IH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918II	-	LD6918GDGW-II	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IJ	-	LD6918GDGW-IJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IK	-	LD6918GDGW-IK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IL	-	LD6918GDGW-IL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IM	-	LD6918GDGW-IM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IN	-	LD6918GDGW-IN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IO	-	LD6918GDGW-IO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IP	-	LD6918GDGW-IP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IQ	-	LD6918GDGW-IQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IR	-	LD6918GDGW-IR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IS	-	LD6918GDGW-IS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IT	-	LD6918GDGW-IT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IU	-	LD6918GDGW-IU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IV	-	LD6918GDGW-IV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IW	-	LD6918GDGW-IW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IX	-	LD6918GDGW-IX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918IY	-	LD6918GDGW-IY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6918IZ	-	LD6918GDGW-IZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918J1	-	LD6918GDGW-J1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918J2	-	LD6918GDGW-J2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918J3	-	LD6918GDGW-J3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918J4	-	LD6918GDGW-J4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JH	-	LD6918GDGW-JH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JI	-	LD6918GDGW-JI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JJ	-	LD6918GDGW-JJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JK	-	LD6918GDGW-JK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JL	-	LD6918GDGW-JL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JM	-	LD6918GDGW-JM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JN	-	LD6918GDGW-JN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JO	-	LD6918GDGW-JO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JP	-	LD6918GDGW-JP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JQ	-	LD6918GDGW-JQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JR	-	LD6918GDGW-JR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JS	-	LD6918GDGW-JS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JT	-	LD6918GDGW-JT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JU	-	LD6918GDGW-JU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JV	-	LD6918GDGW-JV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JW	-	LD6918GDGW-JW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JX	-	LD6918GDGW-JX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JY	-	LD6918GDGW-JY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918JZ	-	LD6918GDGW-JZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918K1	-	LD6918GDGW-K1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918K2	-	LD6918GDGW-K2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918K3	-	LD6918GDGW-K3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918K4	-	LD6918GDGW-K4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KH	-	LD6918GDGW-KH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KI	-	LD6918GDGW-KI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KJ	-	LD6918GDGW-KJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KK	-	LD6918GDGW-KK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KL	-	LD6918GDGW-KL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KM	-	LD6918GDGW-KM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KN	-	LD6918GDGW-KN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KO	-	LD6918GDGW-KO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KP	-	LD6918GDGW-KP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KQ	-	LD6918GDGW-KQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KR	-	LD6918GDGW-KR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KS	-	LD6918GDGW-KS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KT	-	LD6918GDGW-KT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KU	-	LD6918GDGW-KU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KV	-	LD6918GDGW-KV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KW	-	LD6918GDGW-KW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KX	-	LD6918GDGW-KX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KY	-	LD6918GDGW-KY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918KZ	-	LD6918GDGW-KZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918L1	-	LD6918GDGW-L1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918L2	-	LD6918GDGW-L2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918L3	-	LD6918GDGW-L3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918L4	-	LD6918GDGW-L4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LH	-	LD6918GDGW-LH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LI	-	LD6918GDGW-LI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LJ	-	LD6918GDGW-LJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LK	-	LD6918GDGW-LK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LL	-	LD6918GDGW-LL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LM	-	LD6918GDGW-LM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LN	-	LD6918GDGW-LN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LO	-	LD6918GDGW-LO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LP	-	LD6918GDGW-LP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LQ	-	LD6918GDGW-LQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LR	-	LD6918GDGW-LR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LS	-	LD6918GDGW-LS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LT	-	LD6918GDGW-LT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LU	-	LD6918GDGW-LU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LV	-	LD6918GDGW-LV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LW	-	LD6918GDGW-LW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LX	-	LD6918GDGW-LX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LY	-	LD6918GDGW-LY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918LZ	-	LD6918GDGW-LZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6918M1	-	LD6918GDGW-M1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918M2	-	LD6918GDGW-M2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918M3	-	LD6918GDGW-M3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918M4	-	LD6918GDGW-M4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MH	-	LD6918GDGW-MH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MI	-	LD6918GDGW-MI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MJ	-	LD6918GDGW-MJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MK	-	LD6918GDGW-MK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ML	-	LD6918GDGW-ML	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MM	-	LD6918GDGW-MM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MN	-	LD6918GDGW-MN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MO	-	LD6918GDGW-MO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MP	-	LD6918GDGW-MP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MQ	-	LD6918GDGW-MQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MR	-	LD6918GDGW-MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MS	-	LD6918GDGW-MS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MT	-	LD6918GDGW-MT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MU	-	LD6918GDGW-MU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MV	-	LD6918GDGW-MV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MW	-	LD6918GDGW-MW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MX	-	LD6918GDGW-MX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MY	-	LD6918GDGW-MY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918MZ	-	LD6918GDGW-MZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918N1	-	LD6918GDGW-N1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918N2	-	LD6918GDGW-N2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918N3	-	LD6918GDGW-N3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918N4	-	LD6918GDGW-N4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NH	-	LD6918GDGW-NH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NI	-	LD6918GDGW-NI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NJ	-	LD6918GDGW-NJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NK	-	LD6918GDGW-NK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NL	-	LD6918GDGW-NL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NM	-	LD6918GDGW-NM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NN	-	LD6918GDGW-NN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NO	-	LD6918GDGW-NO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NP	-	LD6918GDGW-NP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NQ	-	LD6918GDGW-NQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NR	-	LD6918GDGW-NR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NS	-	LD6918GDGW-NS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NT	-	LD6918GDGW-NT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NU	-	LD6918GDGW-NU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NV	-	LD6918GDGW-NV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NW	-	LD6918GDGW-NW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NX	-	LD6918GDGW-NX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NY	-	LD6918GDGW-NY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918NZ	-	LD6918GDGW-NZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918O1	-	LD6918GDGW-O1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918O2	-	LD6918GDGW-O2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918O3	-	LD6918GDGW-O3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918O4	-	LD6918GDGW-O4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OH	-	LD6918GDGW-OH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OI	-	LD6918GDGW-OI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OJ	-	LD6918GDGW-OJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OK	-	LD6918GDGW-OK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OL	-	LD6918GDGW-OL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OM	-	LD6918GDGW-OM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ON	-	LD6918GDGW-ON	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OO	-	LD6918GDGW-OO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OP	-	LD6918GDGW-OP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OQ	-	LD6918GDGW-OQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OR	-	LD6918GDGW-OR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OS	-	LD6918GDGW-OS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OT	-	LD6918GDGW-OT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OU	-	LD6918GDGW-OU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OV	-	LD6918GDGW-OV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OW	-	LD6918GDGW-OW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OX	-	LD6918GDGW-OX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OY	-	LD6918GDGW-OY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918OZ	-	LD6918GDGW-OZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918P1	-	LD6918GDGW-P1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6918P2	-	LD6918GDGW-P2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918P3	-	LD6918GDGW-P3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918P4	-	LD6918GDGW-P4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PH	-	LD6918GDGW-PH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PI	-	LD6918GDGW-PI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PJ	-	LD6918GDGW-PJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PK	-	LD6918GDGW-PK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PL	-	LD6918GDGW-PL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PM	-	LD6918GDGW-PM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PN	-	LD6918GDGW-PN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PO	-	LD6918GDGW-PO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PP	-	LD6918GDGW-PP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PQ	-	LD6918GDGW-PQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PR	-	LD6918GDGW-PR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PS	-	LD6918GDGW-PS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PT	-	LD6918GDGW-PT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PU	-	LD6918GDGW-PU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PV	-	LD6918GDGW-PV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PW	-	LD6918GDGW-PW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PX	-	LD6918GDGW-PX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PY	-	LD6918GDGW-PY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918PZ	-	LD6918GDGW-PZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918Q1	-	LD6918GDGW-Q1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918Q2	-	LD6918GDGW-Q2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918Q3	-	LD6918GDGW-Q3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918Q4	-	LD6918GDGW-Q4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QH	-	LD6918GDGW-QH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QI	-	LD6918GDGW-QI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QJ	-	LD6918GDGW-QJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QK	-	LD6918GDGW-QK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QL	-	LD6918GDGW-QL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QM	-	LD6918GDGW-QM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QN	-	LD6918GDGW-QN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QO	-	LD6918GDGW-QO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QP	-	LD6918GDGW-QP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QQ	-	LD6918GDGW-QQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QR	-	LD6918GDGW-QR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QS	-	LD6918GDGW-QS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QT	-	LD6918GDGW-QT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QU	-	LD6918GDGW-QU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QV	-	LD6918GDGW-QV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QW	-	LD6918GDGW-QW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QX	-	LD6918GDGW-QX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QY	-	LD6918GDGW-QY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918QZ	-	LD6918GDGW-QZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918R1	-	LD6918GDGW-R1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918R2	-	LD6918GDGW-R2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918R3	-	LD6918GDGW-R3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918R4	-	LD6918GDGW-R4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RH	-	LD6918GDGW-RH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RI	-	LD6918GDGW-RI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RJ	-	LD6918GDGW-RJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RK	-	LD6918GDGW-RK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RL	-	LD6918GDGW-RL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RM	-	LD6918GDGW-RM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RN	-	LD6918GDGW-RN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RO	-	LD6918GDGW-RO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RP	-	LD6918GDGW-RP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RQ	-	LD6918GDGW-RQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RR	-	LD6918GDGW-RR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RS	-	LD6918GDGW-RS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RT	-	LD6918GDGW-RT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RU	-	LD6918GDGW-RU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RV	-	LD6918GDGW-RV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RW	-	LD6918GDGW-RW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RX	-	LD6918GDGW-RX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RY	-	LD6918GDGW-RY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918RZ	-	LD6918GDGW-RZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918S1	-	LD6918GDGW-S1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918S2	-	LD6918GDGW-S2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6918S3	-	LD6918GDGW-S3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918S4	-	LD6918GDGW-S4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SH	-	LD6918GDGW-SH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SI	-	LD6918GDGW-SI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SJ	-	LD6918GDGW-SJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SK	-	LD6918GDGW-SK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SL	-	LD6918GDGW-SL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SM	-	LD6918GDGW-SM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SN	-	LD6918GDGW-SN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SO	-	LD6918GDGW-SO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SP	-	LD6918GDGW-SP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SQ	-	LD6918GDGW-SQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SR	-	LD6918GDGW-SR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SS	-	LD6918GDGW-SS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ST	-	LD6918GDGW-ST	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SU	-	LD6918GDGW-SU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SV	-	LD6918GDGW-SV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SW	-	LD6918GDGW-SW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SX	-	LD6918GDGW-SX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SY	-	LD6918GDGW-SY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918SZ	-	LD6918GDGW-SZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918T1	-	LD6918GDGW-T1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918T2	-	LD6918GDGW-T2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918T3	-	LD6918GDGW-T3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918T4	-	LD6918GDGW-T4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TH	-	LD6918GDGW-TH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TI	-	LD6918GDGW-TI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TJ	-	LD6918GDGW-TJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TK	-	LD6918GDGW-TK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TL	-	LD6918GDGW-TL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TM	-	LD6918GDGW-TM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TN	-	LD6918GDGW-TN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TO	-	LD6918GDGW-TO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TP	-	LD6918GDGW-TP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TQ	-	LD6918GDGW-TQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TR	-	LD6918GDGW-TR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TS	-	LD6918GDGW-TS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TT	-	LD6918GDGW-TT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TU	-	LD6918GDGW-TU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TV	-	LD6918GDGW-TV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TW	-	LD6918GDGW-TW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TX	-	LD6918GDGW-TX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TY	-	LD6918GDGW-TY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918TZ	-	LD6918GDGW-TZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918U1	-	LD6918GDGW-U1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918U2	-	LD6918GDGW-U2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918U3	-	LD6918GDGW-U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918U4	-	LD6918GDGW-U4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UH	-	LD6918GDGW-UH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UI	-	LD6918GDGW-UI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UJ	-	LD6918GDGW-UJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UK	-	LD6918GDGW-UK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UL	-	LD6918GDGW-UL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UM	-	LD6918GDGW-UM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UN	-	LD6918GDGW-UN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UO	-	LD6918GDGW-UO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UP	-	LD6918GDGW-UP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UQ	-	LD6918GDGW-UQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UR	-	LD6918GDGW-UR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918US	-	LD6918GDGW-US	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UT	-	LD6918GDGW-UT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UU	-	LD6918GDGW-UU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UV	-	LD6918GDGW-UV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UW	-	LD6918GDGW-UW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UX	-	LD6918GDGW-UX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UY	-	LD6918GDGW-UY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918UZ	-	LD6918GDGW-UZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918V1	-	LD6918GDGW-V1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918V2	-	LD6918GDGW-V2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918V3	-	LD6918GDGW-V3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6918V4	-	LD6918GDGW-V4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VH	-	LD6918GDGW-VH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VI	-	LD6918GDGW-VI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VJ	-	LD6918GDGW-VJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VK	-	LD6918GDGW-VK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VL	-	LD6918GDGW-VL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VM	-	LD6918GDGW-VM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VN	-	LD6918GDGW-VN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VO	-	LD6918GDGW-VO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VP	-	LD6918GDGW-VP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VQ	-	LD6918GDGW-VQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VR	-	LD6918GDGW-VR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VS	-	LD6918GDGW-VS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VT	-	LD6918GDGW-VT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VU	-	LD6918GDGW-VU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VV	-	LD6918GDGW-VV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VW	-	LD6918GDGW-VW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VX	-	LD6918GDGW-VX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VY	-	LD6918GDGW-VY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918VZ	-	LD6918GDGW-VZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918W1	-	LD6918GDGW-W1	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918W2	-	LD6918GDGW-W2	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918W3	-	LD6918GDGW-W3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918W4	-	LD6918GDGW-W4	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WH	-	LD6918GDGW-WH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WI	-	LD6918GDGW-WI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WJ	-	LD6918GDGW-WJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WK	-	LD6918GDGW-WK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WL	-	LD6918GDGW-WL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WM	-	LD6918GDGW-WM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WN	-	LD6918GDGW-WN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WO	-	LD6918GDGW-WO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WP	-	LD6918GDGW-WP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WQ	-	LD6918GDGW-WQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WR	-	LD6918GDGW-WR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WS	-	LD6918GDGW-WS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WT	-	LD6918GDGW-WT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WU	-	LD6918GDGW-WU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WV	-	LD6918GDGW-WV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WW	-	LD6918GDGW-WW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WX	-	LD6918GDGW-WX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WY	-	LD6918GDGW-WY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918WZ	-	LD6918GDGW-WZ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918X1	-	LD6918GDGW-X1	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918X2	-	LD6918GDGW-X2	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918X3	-	LD6918GDGW-X3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918X4	-	LD6918GDGW-X4	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XH	-	LD6918GDGW-XH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XI	-	LD6918GDGW-XI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XJ	-	LD6918GDGW-XJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XK	-	LD6918GDGW-XK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XL	-	LD6918GDGW-XL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XM	-	LD6918GDGW-XM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XN	-	LD6918GDGW-XN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XO	-	LD6918GDGW-XO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XP	-	LD6918GDGW-XP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XQ	-	LD6918GDGW-XQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XR	-	LD6918GDGW-XR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XS	-	LD6918GDGW-XS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XT	-	LD6918GDGW-XT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XU	-	LD6918GDGW-XU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XV	-	LD6918GDGW-XV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XW	-	LD6918GDGW-XW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XX	-	LD6918GDGW-XX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XY	-	LD6918GDGW-XY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918XZ	-	LD6918GDGW-XZ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918Y1	-	LD6918GDGW-Y1	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918Y2	-	LD6918GDGW-Y2	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918Y3	-	LD6918GDGW-Y3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918Y4	-	LD6918GDGW-Y4	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6918YH	-	LD6918GDGW-YH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YI	-	LD6918GDGW-YI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YJ	-	LD6918GDGW-YJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YK	-	LD6918GDGW-YK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YL	-	LD6918GDGW-YL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YM	-	LD6918GDGW-YM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YN	-	LD6918GDGW-YN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YO	-	LD6918GDGW-YO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YP	-	LD6918GDGW-YP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YQ	-	LD6918GDGW-YQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YR	-	LD6918GDGW-YR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YS	-	LD6918GDGW-YS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YT	-	LD6918GDGW-YT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YU	-	LD6918GDGW-YU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YV	-	LD6918GDGW-YV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YW	-	LD6918GDGW-YW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YX	-	LD6918GDGW-YX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YY	-	LD6918GDGW-YY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918YZ	-	LD6918GDGW-YZ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918Z1	-	LD6918GDGW-Z1	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918Z2	-	LD6918GDGW-Z2	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.65V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918Z3	-	LD6918GDGW-Z3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918Z4	-	LD6918GDGW-Z4	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.15V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZH	-	LD6918GDGW-ZH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZI	-	LD6918GDGW-ZI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZJ	-	LD6918GDGW-ZJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZK	-	LD6918GDGW-ZK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZL	-	LD6918GDGW-ZL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZM	-	LD6918GDGW-ZM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZN	-	LD6918GDGW-ZN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZO	-	LD6918GDGW-ZO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZP	-	LD6918GDGW-ZP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZQ	-	LD6918GDGW-ZQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZR	-	LD6918GDGW-ZR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZS	-	LD6918GDGW-ZS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZT	-	LD6918GDGW-ZT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZU	-	LD6918GDGW-ZU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZV	-	LD6918GDGW-ZV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZW	-	LD6918GDGW-ZW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZX	-	LD6918GDGW-ZX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZY	-	LD6918GDGW-ZY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6918ZZ	-	LD6918GDGW-ZZ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 300mA, +CE	WDFN-8L 3x3	75yo	VR19	9ma	Ltr
6A	-	RP101K122D	LVR-IC	LDO, LN, 1.2V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6A	-	RP173K331D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6A	-	RP200K321B	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
6A	-	XC6221D18B7R	LVR-IC	LDO, 1.85V±20mV, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6A	-	XC6223G2019R-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6A050	-	XC6106A050ER	Vdet-IC	5.0V±2%, Hst, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
6A116	-	XC6104A116ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A117	-	XC6104A117ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A118	-	XC6104A118ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A119	-	XC6104A119ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A120	-	XC6104A120ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A121	-	XC6104A121ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A122	-	XC6104A122ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A123	-	XC6104A123ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A124	-	XC6104A124ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A125	-	XC6104A125ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A126	-	XC6104A126ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A127	-	XC6104A127ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A128	-	XC6104A128ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A129	-	XC6104A129ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A130	-	XC6104A130ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A131	-	XC6104A131ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A132	-	XC6104A132ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A133	-	XC6104A133ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A134	-	XC6104A134ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A135	-	XC6104A135ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A136	-	XC6104A136ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A137	-	XC6104A137ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6A138	-	XC6104A138ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A139	-	XC6104A139ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A140	-	XC6104A140ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A141	-	XC6104A141ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A142	-	XC6104A142ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A143	-	XC6104A143ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A144	-	XC6104A144ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A145	-	XC6104A145ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A146	-	XC6104A146ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A147	-	XC6104A147ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A148	-	XC6104A148ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A149	-	XC6104A149ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A150	-	XC6104A150ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A216	-	XC6104A216ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A217	-	XC6104A217ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A218	-	XC6104A218ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A219	-	XC6104A219ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A220	-	XC6104A220ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A221	-	XC6104A221ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A222	-	XC6104A222ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A223	-	XC6104A223ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A224	-	XC6104A224ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A225	-	XC6104A225ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A226	-	XC6104A226ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A227	-	XC6104A227ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A228	-	XC6104A228ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A229	-	XC6104A229ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A230	-	XC6104A230ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A231	-	XC6104A231ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A232	-	XC6104A232ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A233	-	XC6104A233ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A234	-	XC6104A234ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A235	-	XC6104A235ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A236	-	XC6104A236ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A237	-	XC6104A237ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A238	-	XC6104A238ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A239	-	XC6104A239ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A240	-	XC6104A240ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A241	-	XC6104A241ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A242	-	XC6104A242ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A243	-	XC6104A243ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A244	-	XC6104A244ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A245	-	XC6104A245ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A246	-	XC6104A246ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A247	-	XC6104A247ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A248	-	XC6104A248ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A249	-	XC6104A249ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A250	-	XC6104A250ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A316	-	XC6104A316ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A317	-	XC6104A317ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A318	-	XC6104A318ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A319	-	XC6104A319ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A320	-	XC6104A320ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A321	-	XC6104A321ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A322	-	XC6104A322ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A323	-	XC6104A323ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A324	-	XC6104A324ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A325	-	XC6104A325ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A326	-	XC6104A326ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A327	-	XC6104A327ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A328	-	XC6104A328ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A329	-	XC6104A329ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A330	-	XC6104A330ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A331	-	XC6104A331ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A332	-	XC6104A332ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A333	-	XC6104A333ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A334	-	XC6104A334ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A335	-	XC6104A335ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A336	-	XC6104A336ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A337	-	XC6104A337ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6A338	-	XC6104A338ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A339	-	XC6104A339ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A340	-	XC6104A340ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A341	-	XC6104A341ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A342	-	XC6104A342ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A343	-	XC6104A343ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A344	-	XC6104A344ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A345	-	XC6104A345ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A346	-	XC6104A346ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A347	-	XC6104A347ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A348	-	XC6104A348ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A349	-	XC6104A349ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A350	-	XC6104A350ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A416	-	XC6104A416ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A417	-	XC6104A417ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A418	-	XC6104A418ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A419	-	XC6104A419ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A420	-	XC6104A420ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A421	-	XC6104A421ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A422	-	XC6104A422ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A423	-	XC6104A423ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A424	-	XC6104A424ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A425	-	XC6104A425ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A426	-	XC6104A426ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A427	-	XC6104A427ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A428	-	XC6104A428ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A429	-	XC6104A429ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A430	-	XC6104A430ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A431	-	XC6104A431ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A432	-	XC6104A432ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A433	-	XC6104A433ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A434	-	XC6104A434ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A435	-	XC6104A435ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A436	-	XC6104A436ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A437	-	XC6104A437ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A438	-	XC6104A438ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A439	-	XC6104A439ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A440	-	XC6104A440ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A441	-	XC6104A441ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A442	-	XC6104A442ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A443	-	XC6104A443ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A444	-	XC6104A444ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A445	-	XC6104A445ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A446	-	XC6104A446ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A447	-	XC6104A447ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A448	-	XC6104A448ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A449	-	XC6104A449ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A450	-	XC6104A450ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A516	-	XC6104A516ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A517	-	XC6104A517ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A518	-	XC6104A518ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A519	-	XC6104A519ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A520	-	XC6104A520ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A521	-	XC6104A521ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A522	-	XC6104A522ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A523	-	XC6104A523ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A524	-	XC6104A524ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A525	-	XC6104A525ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A526	-	XC6104A526ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A527	-	XC6104A527ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A528	-	XC6104A528ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A529	-	XC6104A529ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A530	-	XC6104A530ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A531	-	XC6104A531ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A532	-	XC6104A532ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A533	-	XC6104A533ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A534	-	XC6104A534ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A535	-	XC6104A535ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A536	-	XC6104A536ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A537	-	XC6104A537ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6A538	-	XC6104A538ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A539	-	XC6104A539ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A540	-	XC6104A540ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A541	-	XC6104A541ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A542	-	XC6104A542ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A543	-	XC6104A543ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A544	-	XC6104A544ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A545	-	XC6104A545ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A546	-	XC6104A546ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A547	-	XC6104A547ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A548	-	XC6104A548ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A549	-	XC6104A549ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A550	-	XC6104A550ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A616	-	XC6104A616ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A617	-	XC6104A617ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A618	-	XC6104A618ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A619	-	XC6104A619ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A620	-	XC6104A620ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A621	-	XC6104A621ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A622	-	XC6104A622ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A623	-	XC6104A623ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A624	-	XC6104A624ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A625	-	XC6104A625ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A626	-	XC6104A626ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A627	-	XC6104A627ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A628	-	XC6104A628ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A629	-	XC6104A629ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A630	-	XC6104A630ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A631	-	XC6104A631ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A632	-	XC6104A632ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A633	-	XC6104A633ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A634	-	XC6104A634ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A635	-	XC6104A635ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A636	-	XC6104A636ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A637	-	XC6104A637ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A638	-	XC6104A638ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A639	-	XC6104A639ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A640	-	XC6104A640ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A641	-	XC6104A641ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A642	-	XC6104A642ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A643	-	XC6104A643ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A644	-	XC6104A644ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A645	-	XC6104A645ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A646	-	XC6104A646ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A647	-	XC6104A647ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A648	-	XC6104A648ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A649	-	XC6104A649ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A650	-	XC6104A650ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
6A8	-	XC9237A08C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6A8	-	XC9237A08C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6A8	-	XC9237A08CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6A9	-	XC9237A09C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6A9	-	XC9237A09C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6A9	-	XC9237A09CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6AL	-	XC9237A0LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6AL	-	XC9237A0LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6AL	-	XC9237A0LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6AM	-	XC9237A0MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6AM	-	XC9237A0MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6AM	-	XC9237A0MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6B	-	RP101K132D	LVR-IC	LDO, LN, 1.3V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6B	-	RP173K341D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6B	-	RP200K331B	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
6B	-	XC6221D19B7R	LVR-IC	LDO, 1.95V±20mV, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6B	-	XC6223G2119R-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6B0	-	XC9237A10C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6B0	-	XC9237A10C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6B0	-	XC9237A10CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6B1	-	XC9237A11C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6B1	-	XC9237A11C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6B1	-	XC9237A11CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6B2	-	XC9237A12C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6B2	-	XC9237A12C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6B2	-	XC9237A12CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6B216	-	XC6104B216ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B217	-	XC6104B217ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B218	-	XC6104B218ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B219	-	XC6104B219ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B220	-	XC6104B220ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B221	-	XC6104B221ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B222	-	XC6104B222ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B223	-	XC6104B223ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B224	-	XC6104B224ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B225	-	XC6104B225ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B226	-	XC6104B226ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B227	-	XC6104B227ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B228	-	XC6104B228ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B229	-	XC6104B229ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B230	-	XC6104B230ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B231	-	XC6104B231ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B232	-	XC6104B232ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B233	-	XC6104B233ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B234	-	XC6104B234ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B235	-	XC6104B235ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B236	-	XC6104B236ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B237	-	XC6104B237ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B238	-	XC6104B238ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B239	-	XC6104B239ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B240	-	XC6104B240ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B241	-	XC6104B241ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B242	-	XC6104B242ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B243	-	XC6104B243ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B244	-	XC6104B244ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B245	-	XC6104B245ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B246	-	XC6104B246ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B247	-	XC6104B247ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B248	-	XC6104B248ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B249	-	XC6104B249ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B250	-	XC6104B250ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B3	-	XC9237A13C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6B3	-	XC9237A13C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6B3	-	XC9237A13CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6B316	-	XC6104B316ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B317	-	XC6104B317ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B318	-	XC6104B318ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B319	-	XC6104B319ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B320	-	XC6104B320ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B321	-	XC6104B321ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B322	-	XC6104B322ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B323	-	XC6104B323ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B324	-	XC6104B324ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B325	-	XC6104B325ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B326	-	XC6104B326ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B327	-	XC6104B327ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B328	-	XC6104B328ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B329	-	XC6104B329ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B330	-	XC6104B330ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B331	-	XC6104B331ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B332	-	XC6104B332ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B333	-	XC6104B333ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B334	-	XC6104B334ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B335	-	XC6104B335ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B336	-	XC6104B336ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B337	-	XC6104B337ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B338	-	XC6104B338ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B339	-	XC6104B339ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B340	-	XC6104B340ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B341	-	XC6104B341ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B342	-	XC6104B342ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B343	-	XC6104B343ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6B344	-	XC6104B344ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B345	-	XC6104B345ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B346	-	XC6104B346ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B347	-	XC6104B347ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B348	-	XC6104B348ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B349	-	XC6104B349ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B350	-	XC6104B350ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B4	-	XC9237A14C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6B4	-	XC9237A14C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6B4	-	XC9237A14CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6B416	-	XC6104B416ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B417	-	XC6104B417ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B418	-	XC6104B418ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B419	-	XC6104B419ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B420	-	XC6104B420ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B421	-	XC6104B421ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B422	-	XC6104B422ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B423	-	XC6104B423ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B424	-	XC6104B424ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B425	-	XC6104B425ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B426	-	XC6104B426ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B427	-	XC6104B427ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B428	-	XC6104B428ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B429	-	XC6104B429ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B430	-	XC6104B430ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B431	-	XC6104B431ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B432	-	XC6104B432ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B433	-	XC6104B433ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B434	-	XC6104B434ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B435	-	XC6104B435ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B436	-	XC6104B436ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B437	-	XC6104B437ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B438	-	XC6104B438ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B439	-	XC6104B439ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B440	-	XC6104B440ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B441	-	XC6104B441ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B442	-	XC6104B442ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B443	-	XC6104B443ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B444	-	XC6104B444ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B445	-	XC6104B445ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B446	-	XC6104B446ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B447	-	XC6104B447ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B448	-	XC6104B448ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B449	-	XC6104B449ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B450	-	XC6104B450ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B5	-	XC9237A15C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6B5	-	XC9237A15C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6B5	-	XC9237A15CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6B516	-	XC6104B516ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B517	-	XC6104B517ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B518	-	XC6104B518ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B519	-	XC6104B519ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B520	-	XC6104B520ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B521	-	XC6104B521ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B522	-	XC6104B522ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B523	-	XC6104B523ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B524	-	XC6104B524ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B525	-	XC6104B525ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B526	-	XC6104B526ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B527	-	XC6104B527ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B528	-	XC6104B528ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B529	-	XC6104B529ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B530	-	XC6104B530ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B531	-	XC6104B531ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B532	-	XC6104B532ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B533	-	XC6104B533ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B534	-	XC6104B534ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B535	-	XC6104B535ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B536	-	XC6104B536ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B537	-	XC6104B537ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6B538	-	XC6104B538ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B539	-	XC6104B539ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B540	-	XC6104B540ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B541	-	XC6104B541ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B542	-	XC6104B542ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B543	-	XC6104B543ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B544	-	XC6104B544ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B545	-	XC6104B545ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B546	-	XC6104B546ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B547	-	XC6104B547ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B548	-	XC6104B548ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B549	-	XC6104B549ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B550	-	XC6104B550ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B6	-	XC9237A16C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6B6	-	XC9237A16C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6B6	-	XC9237A16CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6B616	-	XC6104B616ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B617	-	XC6104B617ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B618	-	XC6104B618ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B619	-	XC6104B619ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B620	-	XC6104B620ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B621	-	XC6104B621ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B622	-	XC6104B622ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B623	-	XC6104B623ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B624	-	XC6104B624ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B625	-	XC6104B625ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B626	-	XC6104B626ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B627	-	XC6104B627ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B628	-	XC6104B628ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B629	-	XC6104B629ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B630	-	XC6104B630ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B631	-	XC6104B631ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B632	-	XC6104B632ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B633	-	XC6104B633ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B634	-	XC6104B634ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B635	-	XC6104B635ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B636	-	XC6104B636ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B637	-	XC6104B637ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B638	-	XC6104B638ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B639	-	XC6104B639ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B640	-	XC6104B640ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B641	-	XC6104B641ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B642	-	XC6104B642ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B643	-	XC6104B643ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B644	-	XC6104B644ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B645	-	XC6104B645ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B646	-	XC6104B646ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B647	-	XC6104B647ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B648	-	XC6104B648ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B649	-	XC6104B649ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B650	-	XC6104B650ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
6B7	-	XC9237A17C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6B7	-	XC9237A17C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6B7	-	XC9237A17CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6B8	-	XC9237A18C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6B8	-	XC9237A18C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6B8	-	XC9237A18CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6B9	-	XC9237A19C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6B9	-	XC9237A19C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6B9	-	XC9237A19CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6BA	-	XC9237A1AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6BA	-	XC9237A1AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6BA	-	XC9237A1ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6BB	-	XC9237A1BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6BB	-	XC9237A1BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6BB	-	XC9237A1BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6BC	-	XC9237A1CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6BC	-	XC9237A1CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6BC	-	XC9237A1CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6BD	-	XC9237A1DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6BD	-	XC9237A1DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6BD	-	XC9237A1DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6BE	-	XC9237A1EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6BE	-	XC9237A1EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6BE	-	XC9237A1ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6BF	-	XC9237A1FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6BF	-	XC9237A1FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6BF	-	XC9237A1FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6BH	-	XC9237A1HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6BH	-	XC9237A1HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6BH	-	XC9237A1HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6BK	-	XC9237A1KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6BK	-	XC9237A1KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6BK	-	XC9237A1KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6BL	-	XC9237A1LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6BL	-	XC9237A1LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6BL	-	XC9237A1LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6BM	-	XC9237A1MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6BM	-	XC9237A1MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6BM	-	XC9237A1MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6C	-	MIC5366-1.0YMT	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, CL autodischarge	MLF-4	48vm	VR4	9x	Mcr
6C	-	RP101K152D	LVR-IC	LDO, LN, 1.5V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6C	-	RP173K351D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6C	-	RP200K341B	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
6C	-	XC6221D20B7R	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6C	-	XC6223G2219R-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6C0	-	XC9237A20C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6C0	-	XC9237A20C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6C0	-	XC9237A20CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6C1	-	XC9237A21C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6C1	-	XC9237A21C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6C1	-	XC9237A21CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6C2	-	XC9237A22C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6C2	-	XC9237A22C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6C2	-	XC9237A22CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6C216	-	XC6104C216ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C217	-	XC6104C217ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C218	-	XC6104C218ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C219	-	XC6104C219ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C220	-	XC6104C220ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C221	-	XC6104C221ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C222	-	XC6104C222ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C223	-	XC6104C223ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C224	-	XC6104C224ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C225	-	XC6104C225ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C226	-	XC6104C226ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C227	-	XC6104C227ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C228	-	XC6104C228ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C229	-	XC6104C229ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C230	-	XC6104C230ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C231	-	XC6104C231ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C232	-	XC6104C232ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C233	-	XC6104C233ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C234	-	XC6104C234ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C235	-	XC6104C235ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C236	-	XC6104C236ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C237	-	XC6104C237ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C238	-	XC6104C238ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C239	-	XC6104C239ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C240	-	XC6104C240ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C241	-	XC6104C241ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C242	-	XC6104C242ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C243	-	XC6104C243ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C244	-	XC6104C244ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C245	-	XC6104C245ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C246	-	XC6104C246ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C247	-	XC6104C247ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C248	-	XC6104C248ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C249	-	XC6104C249ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C250	-	XC6104C250ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6C3	-	XC9237A23C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6C3	-	XC9237A23C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6C3	-	XC9237A23CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6C316	-	XC6104C316ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C317	-	XC6104C317ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C318	-	XC6104C318ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C319	-	XC6104C319ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C320	-	XC6104C320ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C321	-	XC6104C321ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C322	-	XC6104C322ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C323	-	XC6104C323ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C324	-	XC6104C324ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C325	-	XC6104C325ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C326	-	XC6104C326ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C327	-	XC6104C327ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C328	-	XC6104C328ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C329	-	XC6104C329ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C330	-	XC6104C330ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C331	-	XC6104C331ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C332	-	XC6104C332ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C333	-	XC6104C333ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C334	-	XC6104C334ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C335	-	XC6104C335ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C336	-	XC6104C336ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C337	-	XC6104C337ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C338	-	XC6104C338ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C339	-	XC6104C339ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C340	-	XC6104C340ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C341	-	XC6104C341ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C342	-	XC6104C342ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C343	-	XC6104C343ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C344	-	XC6104C344ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C345	-	XC6104C345ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C346	-	XC6104C346ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C347	-	XC6104C347ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C348	-	XC6104C348ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C349	-	XC6104C349ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C350	-	XC6104C350ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C4	-	XC9237A24C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6C4	-	XC9237A24C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6C4	-	XC9237A24CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6C416	-	XC6104C416ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C417	-	XC6104C417ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C418	-	XC6104C418ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C419	-	XC6104C419ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C420	-	XC6104C420ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C421	-	XC6104C421ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C422	-	XC6104C422ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C423	-	XC6104C423ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C424	-	XC6104C424ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C425	-	XC6104C425ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C426	-	XC6104C426ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C427	-	XC6104C427ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C428	-	XC6104C428ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C429	-	XC6104C429ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C430	-	XC6104C430ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C431	-	XC6104C431ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C432	-	XC6104C432ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C433	-	XC6104C433ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C434	-	XC6104C434ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C435	-	XC6104C435ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C436	-	XC6104C436ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C437	-	XC6104C437ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C438	-	XC6104C438ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C439	-	XC6104C439ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C440	-	XC6104C440ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C441	-	XC6104C441ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C442	-	XC6104C442ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C443	-	XC6104C443ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C444	-	XC6104C444ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6C445	-	XC6104C445ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C446	-	XC6104C446ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C447	-	XC6104C447ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C448	-	XC6104C448ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C449	-	XC6104C449ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C450	-	XC6104C450ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C5	-	XC9237A25C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6C5	-	XC9237A25C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6C5	-	XC9237A25CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6C516	-	XC6104C516ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C517	-	XC6104C517ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C518	-	XC6104C518ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C519	-	XC6104C519ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C520	-	XC6104C520ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C521	-	XC6104C521ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C522	-	XC6104C522ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C523	-	XC6104C523ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C524	-	XC6104C524ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C525	-	XC6104C525ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C526	-	XC6104C526ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C527	-	XC6104C527ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C528	-	XC6104C528ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C529	-	XC6104C529ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C530	-	XC6104C530ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C531	-	XC6104C531ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C532	-	XC6104C532ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C533	-	XC6104C533ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C534	-	XC6104C534ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C535	-	XC6104C535ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C536	-	XC6104C536ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C537	-	XC6104C537ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C538	-	XC6104C538ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C539	-	XC6104C539ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C540	-	XC6104C540ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C541	-	XC6104C541ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C542	-	XC6104C542ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C543	-	XC6104C543ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C544	-	XC6104C544ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C545	-	XC6104C545ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C546	-	XC6104C546ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C547	-	XC6104C547ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C548	-	XC6104C548ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C549	-	XC6104C549ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C550	-	XC6104C550ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C6	-	XC9237A26C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6C6	-	XC9237A26C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6C6	-	XC9237A26CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6C616	-	XC6104C616ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C617	-	XC6104C617ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C618	-	XC6104C618ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C619	-	XC6104C619ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C620	-	XC6104C620ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C621	-	XC6104C621ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C622	-	XC6104C622ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C623	-	XC6104C623ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C624	-	XC6104C624ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C625	-	XC6104C625ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C626	-	XC6104C626ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C627	-	XC6104C627ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C628	-	XC6104C628ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C629	-	XC6104C629ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C630	-	XC6104C630ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C631	-	XC6104C631ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C632	-	XC6104C632ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C633	-	XC6104C633ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C634	-	XC6104C634ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C635	-	XC6104C635ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C636	-	XC6104C636ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C637	-	XC6104C637ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C638	-	XC6104C638ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6C639	-	XC6104C639ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C640	-	XC6104C640ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C641	-	XC6104C641ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C642	-	XC6104C642ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C643	-	XC6104C643ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C644	-	XC6104C644ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C645	-	XC6104C645ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C646	-	XC6104C646ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C647	-	XC6104C647ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C648	-	XC6104C648ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C649	-	XC6104C649ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C650	-	XC6104C650ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
6C7	-	XC9237A27C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6C7	-	XC9237A27C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6C7	-	XC9237A27CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6C8	-	XC9237A28C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6C8	-	XC9237A28C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6C8	-	XC9237A28CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6C9	-	XC9237A29C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6C9	-	XC9237A29C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6C9	-	XC9237A29CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6CA	-	XC9237A2AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6CA	-	XC9237A2AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6CA	-	XC9237A2ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6CB	-	XC9237A2BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6CB	-	XC9237A2BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6CB	-	XC9237A2BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6CC	-	XC9237A2CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6CC	-	XC9237A2CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6CC	-	XC9237A2CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6CD	-	XC9237A2DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6CD	-	XC9237A2DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6CD	-	XC9237A2DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6CE	-	XC9237A2EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6CE	-	XC9237A2EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6CE	-	XC9237A2ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6CF	-	XC9237A2FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6CF	-	XC9237A2FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6CF	-	XC9237A2FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6CH	-	XC9237A2HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6CH	-	XC9237A2HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6CH	-	XC9237A2HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6CK	-	XC9237A2KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6CK	-	XC9237A2KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6CK	-	XC9237A2KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6CL	-	XC9237A2LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6CL	-	XC9237A2LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6CL	-	XC9237A2LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6CM	-	XC9237A2MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6CM	-	XC9237A2MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6CM	-	XC9237A2MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6D	-	RP101K182D	LVR-IC	LDO, LN, 1.8V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6D	-	RP173K361D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6D	-	RP200K351B	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
6D	-	XC6221D21B7R	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6D	-	XC6223G2319R-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6D0	-	XC9237A30C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6D0	-	XC9237A30C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6D0	-	XC9237A30CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6D1	-	XC9237A31C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6D1	-	XC9237A31C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6D1	-	XC9237A31CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6D2	-	XC9237A32C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6D2	-	XC9237A32C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6D2	-	XC9237A32CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6D3	-	XC9237A33C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6D3	-	XC9237A33C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6D3	-	XC9237A33CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6D316	-	XC6104D316ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D317	-	XC6104D317ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6D318	-	XC6104D318ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D319	-	XC6104D319ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D320	-	XC6104D320ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D321	-	XC6104D321ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D322	-	XC6104D322ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D323	-	XC6104D323ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D324	-	XC6104D324ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D325	-	XC6104D325ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D326	-	XC6104D326ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D327	-	XC6104D327ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D328	-	XC6104D328ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D329	-	XC6104D329ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D330	-	XC6104D330ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D331	-	XC6104D331ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D332	-	XC6104D332ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D333	-	XC6104D333ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D334	-	XC6104D334ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D335	-	XC6104D335ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D336	-	XC6104D336ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D337	-	XC6104D337ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D338	-	XC6104D338ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D339	-	XC6104D339ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D340	-	XC6104D340ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D341	-	XC6104D341ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D342	-	XC6104D342ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D343	-	XC6104D343ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D344	-	XC6104D344ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D345	-	XC6104D345ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D346	-	XC6104D346ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D347	-	XC6104D347ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D348	-	XC6104D348ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D349	-	XC6104D349ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D350	-	XC6104D350ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D4	-	XC9237A34C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6D4	-	XC9237A34C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6D4	-	XC9237A34CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6D416	-	XC6104D416ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D417	-	XC6104D417ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D418	-	XC6104D418ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D419	-	XC6104D419ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D420	-	XC6104D420ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D421	-	XC6104D421ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D422	-	XC6104D422ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D423	-	XC6104D423ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D424	-	XC6104D424ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D425	-	XC6104D425ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D426	-	XC6104D426ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D427	-	XC6104D427ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D428	-	XC6104D428ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D429	-	XC6104D429ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D430	-	XC6104D430ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D431	-	XC6104D431ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D432	-	XC6104D432ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D433	-	XC6104D433ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D434	-	XC6104D434ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D435	-	XC6104D435ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D436	-	XC6104D436ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D437	-	XC6104D437ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D438	-	XC6104D438ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D439	-	XC6104D439ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D440	-	XC6104D440ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D441	-	XC6104D441ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D442	-	XC6104D442ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D443	-	XC6104D443ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D444	-	XC6104D444ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D445	-	XC6104D445ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D446	-	XC6104D446ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D447	-	XC6104D447ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D448	-	XC6104D448ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D449	-	XC6104D449ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6D450	-	XC6104D450ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D5	-	XC9237A35C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6D5	-	XC9237A35C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6D5	-	XC9237A35CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6D516	-	XC6104D516ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D517	-	XC6104D517ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D518	-	XC6104D518ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D519	-	XC6104D519ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D520	-	XC6104D520ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D521	-	XC6104D521ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D522	-	XC6104D522ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D523	-	XC6104D523ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D524	-	XC6104D524ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D525	-	XC6104D525ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D526	-	XC6104D526ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D527	-	XC6104D527ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D528	-	XC6104D528ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D529	-	XC6104D529ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D530	-	XC6104D530ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D531	-	XC6104D531ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D532	-	XC6104D532ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D533	-	XC6104D533ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D534	-	XC6104D534ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D535	-	XC6104D535ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D536	-	XC6104D536ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D537	-	XC6104D537ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D538	-	XC6104D538ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D539	-	XC6104D539ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D540	-	XC6104D540ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D541	-	XC6104D541ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D542	-	XC6104D542ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D543	-	XC6104D543ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D544	-	XC6104D544ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D545	-	XC6104D545ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D546	-	XC6104D546ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D547	-	XC6104D547ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D548	-	XC6104D548ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D549	-	XC6104D549ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D550	-	XC6104D550ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D6	-	XC9237A36C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6D6	-	XC9237A36C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6D6	-	XC9237A36CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6D616	-	XC6104D616ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D617	-	XC6104D617ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D618	-	XC6104D618ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D619	-	XC6104D619ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D620	-	XC6104D620ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D621	-	XC6104D621ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D622	-	XC6104D622ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D623	-	XC6104D623ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D624	-	XC6104D624ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D625	-	XC6104D625ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D626	-	XC6104D626ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D627	-	XC6104D627ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D628	-	XC6104D628ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D629	-	XC6104D629ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D630	-	XC6104D630ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D631	-	XC6104D631ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D632	-	XC6104D632ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D633	-	XC6104D633ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D634	-	XC6104D634ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D635	-	XC6104D635ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D636	-	XC6104D636ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D637	-	XC6104D637ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D638	-	XC6104D638ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D639	-	XC6104D639ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D640	-	XC6104D640ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D641	-	XC6104D641ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D642	-	XC6104D642ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D643	-	XC6104D643ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6D644	-	XC6104D644ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D645	-	XC6104D645ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D646	-	XC6104D646ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D647	-	XC6104D647ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D648	-	XC6104D648ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D649	-	XC6104D649ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D650	-	XC6104D650ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
6D7	-	XC9237A37C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6D7	-	XC9237A37C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6D7	-	XC9237A37CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6D8	-	XC9237A38C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6D8	-	XC9237A38C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6D8	-	XC9237A38CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6D9	-	XC9237A39C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6D9	-	XC9237A39C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6D9	-	XC9237A39CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6DA	-	XC9237A3AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6DA	-	XC9237A3AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6DA	-	XC9237A3ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6DB	-	XC9237A3BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6DB	-	XC9237A3BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6DB	-	XC9237A3BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6DC	-	XC9237A3CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6DC	-	XC9237A3CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6DC	-	XC9237A3CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6DD	-	XC9237A3DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6DD	-	XC9237A3DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6DD	-	XC9237A3DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6DE	-	XC9237A3EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6DE	-	XC9237A3EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6DE	-	XC9237A3ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6DF	-	XC9237A3FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6DF	-	XC9237A3FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6DF	-	XC9237A3FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6DH	-	XC9237A3HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6DH	-	XC9237A3HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6DH	-	XC9237A3HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6DK	-	XC9237A3KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6DK	-	XC9237A3KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6DK	-	XC9237A3KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6DL	-	XC9237A3LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6DL	-	XC9237A3LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6DL	-	XC9237A3LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6DM	-	XC9237A3MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6DM	-	XC9237A3MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6DM	-	XC9237A3MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6E	-	RP101K182D5	LVR-IC	LDO, LN, 1.85V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6E	-	RP173K371D	LVR-IC	LDO, 3.7V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6E	-	RP200K361B	LVR-IC	LDO, 3.6V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
6E	-	XC6221D22B7R	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6E	-	XC6223G2419R-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6E0	-	XC9237A40C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6E0	-	XC9237A40C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6E0	-	XC9237A40CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6E416	-	XC6104E416ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E417	-	XC6104E417ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E418	-	XC6104E418ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E419	-	XC6104E419ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E420	-	XC6104E420ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E421	-	XC6104E421ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E422	-	XC6104E422ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E423	-	XC6104E423ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E424	-	XC6104E424ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E425	-	XC6104E425ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E426	-	XC6104E426ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E427	-	XC6104E427ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E428	-	XC6104E428ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E429	-	XC6104E429ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E430	-	XC6104E430ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E431	-	XC6104E431ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor




SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6E432	-	XC6104E432ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E433	-	XC6104E433ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E434	-	XC6104E434ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E435	-	XC6104E435ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E436	-	XC6104E436ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E437	-	XC6104E437ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E438	-	XC6104E438ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E439	-	XC6104E439ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E440	-	XC6104E440ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E441	-	XC6104E441ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E442	-	XC6104E442ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E443	-	XC6104E443ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E444	-	XC6104E444ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E445	-	XC6104E445ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E446	-	XC6104E446ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E447	-	XC6104E447ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E448	-	XC6104E448ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E449	-	XC6104E449ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E450	-	XC6104E450ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E516	-	XC6104E516ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E517	-	XC6104E517ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E518	-	XC6104E518ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E519	-	XC6104E519ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E520	-	XC6104E520ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E521	-	XC6104E521ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E522	-	XC6104E522ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E523	-	XC6104E523ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E524	-	XC6104E524ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E525	-	XC6104E525ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E526	-	XC6104E526ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E527	-	XC6104E527ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E528	-	XC6104E528ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E529	-	XC6104E529ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E530	-	XC6104E530ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E531	-	XC6104E531ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E532	-	XC6104E532ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E533	-	XC6104E533ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E534	-	XC6104E534ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E535	-	XC6104E535ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E536	-	XC6104E536ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E537	-	XC6104E537ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E538	-	XC6104E538ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E539	-	XC6104E539ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E540	-	XC6104E540ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E541	-	XC6104E541ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E542	-	XC6104E542ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E543	-	XC6104E543ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E544	-	XC6104E544ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E545	-	XC6104E545ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E546	-	XC6104E546ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E547	-	XC6104E547ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E548	-	XC6104E548ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E549	-	XC6104E549ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E550	-	XC6104E550ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E616	-	XC6104E616ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E617	-	XC6104E617ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E618	-	XC6104E618ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E619	-	XC6104E619ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E620	-	XC6104E620ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E621	-	XC6104E621ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E622	-	XC6104E622ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E623	-	XC6104E623ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E624	-	XC6104E624ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E625	-	XC6104E625ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E626	-	XC6104E626ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E627	-	XC6104E627ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E628	-	XC6104E628ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E629	-	XC6104E629ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E630	-	XC6104E630ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E631	-	XC6104E631ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6E632	-	XC6104E632ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E633	-	XC6104E633ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E634	-	XC6104E634ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E635	-	XC6104E635ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E636	-	XC6104E636ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E637	-	XC6104E637ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E638	-	XC6104E638ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E639	-	XC6104E639ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E640	-	XC6104E640ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E641	-	XC6104E641ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E642	-	XC6104E642ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E643	-	XC6104E643ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E644	-	XC6104E644ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E645	-	XC6104E645ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E646	-	XC6104E646ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E647	-	XC6104E647ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E648	-	XC6104E648ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E649	-	XC6104E649ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6E650	-	XC6104E650ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
6F	-	MIC5366-1.5YMT	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, CL autodischarge	MLF-4	48vm	VR4	9x	Mcr
6F	-	RP101K192D	LVR-IC	LDO, LN, 1.9V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6F	-	RP173K381D	LVR-IC	LDO, 3.8V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6F	-	RP200K371B	LVR-IC	LDO, 3.7V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
6F	-	XC6221D23B7R	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6F	-	XC6223G2519R-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6F516	-	XC6104F516ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F517	-	XC6104F517ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F518	-	XC6104F518ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F519	-	XC6104F519ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F520	-	XC6104F520ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F521	-	XC6104F521ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F522	-	XC6104F522ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F523	-	XC6104F523ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F524	-	XC6104F524ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F525	-	XC6104F525ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F526	-	XC6104F526ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F527	-	XC6104F527ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F528	-	XC6104F528ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F529	-	XC6104F529ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F530	-	XC6104F530ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F531	-	XC6104F531ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F532	-	XC6104F532ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F533	-	XC6104F533ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F534	-	XC6104F534ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F535	-	XC6104F535ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F536	-	XC6104F536ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F537	-	XC6104F537ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F538	-	XC6104F538ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F539	-	XC6104F539ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F540	-	XC6104F540ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F541	-	XC6104F541ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F542	-	XC6104F542ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F543	-	XC6104F543ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F544	-	XC6104F544ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F545	-	XC6104F545ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F546	-	XC6104F546ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F547	-	XC6104F547ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F548	-	XC6104F548ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F549	-	XC6104F549ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F550	-	XC6104F550ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F616	-	XC6104F616ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F617	-	XC6104F617ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F618	-	XC6104F618ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F619	-	XC6104F619ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F620	-	XC6104F620ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F621	-	XC6104F621ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F622	-	XC6104F622ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F623	-	XC6104F623ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F624	-	XC6104F624ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F625	-	XC6104F625ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6F626	-	XC6104F626ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F627	-	XC6104F627ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F628	-	XC6104F628ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F629	-	XC6104F629ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F630	-	XC6104F630ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F631	-	XC6104F631ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F632	-	XC6104F632ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F633	-	XC6104F633ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F634	-	XC6104F634ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F635	-	XC6104F635ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F636	-	XC6104F636ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F637	-	XC6104F637ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F638	-	XC6104F638ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F639	-	XC6104F639ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F640	-	XC6104F640ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F641	-	XC6104F641ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F642	-	XC6104F642ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F643	-	XC6104F643ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F644	-	XC6104F644ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F645	-	XC6104F645ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F646	-	XC6104F646ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F647	-	XC6104F647ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F648	-	XC6104F648ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F649	-	XC6104F649ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F650	-	XC6104F650ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
6F8	-	XC9237A08D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6F8	-	XC9237A08D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6F8	-	XC9237A08DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6F8	-	XCL207A083AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 0.8V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6F9	-	XC9237A09D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6F9	-	XC9237A09D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6F9	-	XC9237A09DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6F9	-	XCL207A093AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 0.9V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6FL	-	XC9237A0LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6FL	-	XC9237A0LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6FL	-	XC9237A0LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6FL	-	XCL207A0L3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 0.85V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6FM	-	XC9237A0MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6FM	-	XC9237A0MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6FM	-	XC9237A0MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6FM	-	XCL207A0M3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 0.95V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6G	-	MIC5366-1.8YMT	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, CL autodischarge	MLF-4	48vm	VR4	9x	Mcr
6G	-	RP101K202D	LVR-IC	LDO, LN, 2.0V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6G	-	RP173K391D	LVR-IC	LDO, 3.9V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6G	-	RP200K381B	LVR-IC	LDO, 3.8V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
6H	-	MIC5366-2.0YMT	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, CL autodischarge	MLF-4	48vm	VR4	9x	Mcr
6H	-	RP101K252D	LVR-IC	LDO, LN, 2.5V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6H	-	RP173K401D	LVR-IC	LDO, 4.0V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6H	-	RP200K391B	LVR-IC	LDO, 3.9V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
6H	-	XC6221D24B7R	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6H	-	XC6223G2619R-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6H0	-	XC9237A10D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6H0	-	XC9237A10D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6H0	-	XC9237A10DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6H0	-	XCL207A103AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.0V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6H1	-	XC9237A11D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6H1	-	XC9237A11D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6H1	-	XC9237A11DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6H1	-	XCL207A113AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.1V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6H2	-	XC9237A12D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6H2	-	XC9237A12D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6H2	-	XC9237A12DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6H2	-	XCL207A123AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.2V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6H3	-	XC9237A13D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6H3	-	XC9237A13D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6H3	-	XC9237A13DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6H3	-	XCL207A133AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.3V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6H4	-	XC9237A14D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6H4	-	XC9237A14D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6H4	-	XC9237A14DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6H4	-	XCL207A143AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.4V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6H5	-	XC9237A15D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6H5	-	XC9237A15D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6H5	-	XC9237A15DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6H5	-	XCL207A153AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.5V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6H6	-	XC9237A16D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6H6	-	XC9237A16D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6H6	-	XC9237A16DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6H6	-	XCL207A163AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.6V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6H616	-	XC6104H616ER	Vdet-IC	1.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H617	-	XC6104H617ER	Vdet-IC	1.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H618	-	XC6104H618ER	Vdet-IC	1.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H619	-	XC6104H619ER	Vdet-IC	1.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H620	-	XC6104H620ER	Vdet-IC	2.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H621	-	XC6104H621ER	Vdet-IC	2.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H622	-	XC6104H622ER	Vdet-IC	2.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H623	-	XC6104H623ER	Vdet-IC	2.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H624	-	XC6104H624ER	Vdet-IC	2.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H625	-	XC6104H625ER	Vdet-IC	2.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H626	-	XC6104H626ER	Vdet-IC	2.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H627	-	XC6104H627ER	Vdet-IC	2.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H628	-	XC6104H628ER	Vdet-IC	2.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H629	-	XC6104H629ER	Vdet-IC	2.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H630	-	XC6104H630ER	Vdet-IC	3.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H631	-	XC6104H631ER	Vdet-IC	3.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H632	-	XC6104H632ER	Vdet-IC	3.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H633	-	XC6104H633ER	Vdet-IC	3.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H634	-	XC6104H634ER	Vdet-IC	3.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H635	-	XC6104H635ER	Vdet-IC	3.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H636	-	XC6104H636ER	Vdet-IC	3.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H637	-	XC6104H637ER	Vdet-IC	3.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H638	-	XC6104H638ER	Vdet-IC	3.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H639	-	XC6104H639ER	Vdet-IC	3.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H640	-	XC6104H640ER	Vdet-IC	4.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H641	-	XC6104H641ER	Vdet-IC	4.1V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H642	-	XC6104H642ER	Vdet-IC	4.2V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H643	-	XC6104H643ER	Vdet-IC	4.3V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H644	-	XC6104H644ER	Vdet-IC	4.4V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H645	-	XC6104H645ER	Vdet-IC	4.5V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H646	-	XC6104H646ER	Vdet-IC	4.6V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H647	-	XC6104H647ER	Vdet-IC	4.7V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H648	-	XC6104H648ER	Vdet-IC	4.8V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H649	-	XC6104H649ER	Vdet-IC	4.9V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H650	-	XC6104H650ER	Vdet-IC	5.0V±2%, Hst, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
6H7	-	XC9237A17D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6H7	-	XC9237A17D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6H7	-	XC9237A17DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6H7	-	XCL207A173AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.7V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6H8	-	XC9237A18D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6H8	-	XC9237A18D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6H8	-	XC9237A18DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6H8	-	XCL207A183AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.8V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6H9	-	XC9237A19D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6H9	-	XC9237A19D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6H9	-	XC9237A19DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6H9	-	XCL207A193AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.9V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6HA	-	XC9237A1AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6HA	-	XC9237A1AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6HA	-	XC9237A1ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6HA	-	XCL207A1A3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.05V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6HB	-	XC9237A1BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6HB	-	XC9237A1BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6HB	-	XC9237A1BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6HB	-	XCL207A1B3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.15V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6HC	-	XC9237A1CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6HC	-	XC9237A1CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6HC	-	XC9237A1CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6HC	-	XCL207A1C3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.25V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6HD	-	XC9237A1DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6HD	-	XC9237A1DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6HD	-	XC9237A1DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6HD	-	XCL207A1D3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.35V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6HE	-	XC9237A1ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6HE	-	XC9237A1ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6HE	-	XC9237A1EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6HE	-	XCL207A1E3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.45V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6HF	-	XC9237A1FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6HF	-	XC9237A1FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6HF	-	XC9237A1FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6HF	-	XCL207A1F3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.55V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6HH	-	XC9237A1HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6HH	-	XC9237A1HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6HH	-	XC9237A1HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6HH	-	XCL207A1H3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.65V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6HK	-	XC9237A1KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6HK	-	XC9237A1KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6HK	-	XC9237A1KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6HK	-	XCL207A1K3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.75V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6HL	-	XC9237A1LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6HL	-	XC9237A1LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6HL	-	XC9237A1LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6HL	-	XCL207A1L3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.85V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6HM	-	XC9237A1MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6HM	-	XC9237A1MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6HM	-	XC9237A1MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6HM	-	XCL207A1M3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.95V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6J	-	MIC5366-2.5YMT	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, CL autodischarge	MLF-4	48vm	VR4	9x	Mcr
6J	-	RP101K262D	LVR-IC	LDO, LN, 2.6V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6J	-	RP173K411D	LVR-IC	LDO, 4.1V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6J	-	RP200K401B	LVR-IC	LDO, 4.0V±1.0%, 300mA, +CE, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
6K	-	2SJ0675	p-MOSFET	Sw, 30V, 100mA, 100mW, 13Ω(10mA)	ML3-N2	22fg	-	2b	Pan
6K	-	MIC5366-2.6YMT	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, CL autodischarge	MLF-4	48vm	VR4	9x	Mcr
6K	-	RP101K272D	LVR-IC	LDO, LN, 2.7V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6K	-	RP173K421D	LVR-IC	LDO, 4.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6K	-	XC6221D25B7R	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6K	-	XC6223G2719R-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6K0	-	XC9237A20D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6K0	-	XC9237A20D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6K0	-	XC9237A20DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6K0	-	XCL207A203AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.0V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6K1	-	XC9237A21D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6K1	-	XC9237A21D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6K1	-	XC9237A21DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6K1	-	XCL207A213AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.1V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6K2	-	XC9237A22D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6K2	-	XC9237A22D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6K2	-	XC9237A22DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6K2	-	XCL207A223AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.2V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6K3	-	XC9237A23D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6K3	-	XC9237A23D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6K3	-	XC9237A23DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6K3	-	XCL207A233AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.3V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6K4	-	XC9237A24D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6K4	-	XC9237A24D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6K4	-	XC9237A24DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6K4	-	XCL207A243AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.4V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6K5	-	XC9237A25D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6K5	-	XC9237A25D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6K5	-	XC9237A25DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6K5	-	XCL207A253AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.5V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6K6	-	XC9237A26D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6K6	-	XC9237A26D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6K6	-	XC9237A26DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6K6	-	XCL207A263AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.6V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6K7	-	XC9237A27D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6K7	-	XC9237A27D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6K7	-	XC9237A27DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6K7	-	XCL207A273AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.7V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6K8	-	XC9237A28D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6K8	-	XC9237A28D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6K8	-	XC9237A28DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6K8	-	XCL207A283AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.8V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6K9	-	XC9237A29D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6K9	-	XC9237A29D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6K9	-	XC9237A29DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6K9	-	XCL207A293AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.9V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6KA	-	XC9237A2AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6KA	-	XC9237A2AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6KA	-	XC9237A2ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6KA	-	XCL207A2A3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.05V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6KB	-	XC9237A2BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6KB	-	XC9237A2BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6KB	-	XC9237A2BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6KB	-	XCL207A2B3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.15V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6KC	-	XC9237A2CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6KC	-	XC9237A2CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6KC	-	XC9237A2CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6KC	-	XCL207A2C3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.25V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6KD	-	XC9237A2DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6KD	-	XC9237A2DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6KD	-	XC9237A2DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6KD	-	XCL207A2D3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.35V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6KE	-	XC9237A2ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6KE	-	XC9237A2ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6KE	-	XC9237A2EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6KE	-	XCL207A2E3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.45V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6KF	-	XC9237A2FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6KF	-	XC9237A2FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6KF	-	XC9237A2FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6KF	-	XCL207A2F3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.55V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6KH	-	XC9237A2HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6KH	-	XC9237A2HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6KH	-	XC9237A2HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6KH	-	XCL207A2H3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.65V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6KK	-	XC9237A2KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6KK	-	XC9237A2KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6KK	-	XC9237A2KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6KK	-	XCL207A2K3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.75V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6KL	-	XC9237A2LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6KL	-	XC9237A2LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6KL	-	XC9237A2LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6KL	-	XCL207A2L3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.85V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6KM	-	XC9237A2MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6KM	-	XC9237A2MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6KM	-	XC9237A2MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6KM	-	XCL207A2M3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.95V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6L	-	MIC5366-2.7YMT	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, CL autodischarge	MLF-4	48vm	VR4	9x	Mcr
6L	-	RP101K282D	LVR-IC	LDO, LN, 2.8V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6L	-	RP173K431D	LVR-IC	LDO, 4.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6L	-	XC6221D26B7R	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6L	-	XC6223G2819R-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6L0	-	XC9237A30D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6L0	-	XC9237A30D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6L0	-	XC9237A30DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6L0	-	XCL207A303AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.0V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6L1	-	XC9237A31D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6L1	-	XC9237A31D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6L1	-	XC9237A31DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6L1	-	XCL207A313AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.1V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6L2	-	XC9237A32D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6L2	-	XC9237A32D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6L2	-	XC9237A32DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6L2	-	XCL207A323AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.2V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6L3	-	XC9237A33D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6L3	-	XC9237A33D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6L3	-	XC9237A33DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6L3	-	XCL207A333AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.3V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6L4	-	XC9237A34D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6L4	-	XC9237A34D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6L4	-	XC9237A34DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor




SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6L4	-	XCL207A343AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.4V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6L5	-	XC9237A35D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6L5	-	XC9237A35D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6L5	-	XC9237A35DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6L5	-	XCL207A353AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.5V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6L6	-	XC9237A36D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6L6	-	XC9237A36D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6L6	-	XC9237A36DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6L6	-	XCL207A363AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.6V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6L7	-	XC9237A37D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6L7	-	XC9237A37D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6L7	-	XC9237A37DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6L7	-	XCL207A373AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.7V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6L8	-	XC9237A38D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6L8	-	XC9237A38D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6L8	-	XC9237A38DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6L8	-	XCL207A383AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.8V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6L9	-	XC9237A39D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6L9	-	XC9237A39D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6L9	-	XC9237A39DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6L9	-	XCL207A393AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.9V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6LA	-	XC9237A3AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6LA	-	XC9237A3AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6LA	-	XC9237A3ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6LA	-	XCL207A3A3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.05V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6LB	-	XC9237A3BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6LB	-	XC9237A3BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6LB	-	XC9237A3BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6LB	-	XCL207A3B3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.15V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6LC	-	XC9237A3CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6LC	-	XC9237A3CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6LC	-	XC9237A3CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6LC	-	XCL207A3C3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.25V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6LD	-	XC9237A3DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6LD	-	XC9237A3DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6LD	-	XC9237A3DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6LD	-	XCL207A3D3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.35V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6LE	-	XC9237A3ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6LE	-	XC9237A3ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6LE	-	XC9237A3EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6LE	-	XCL207A3E3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.45V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6LF	-	XC9237A3FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6LF	-	XC9237A3FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6LF	-	XC9237A3FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6LF	-	XCL207A3F3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.55V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6LH	-	XC9237A3HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6LH	-	XC9237A3HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6LH	-	XC9237A3HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6LH	-	XCL207A3H3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.65V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6LK	-	XC9237A3KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6LK	-	XC9237A3KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6LK	-	XC9237A3KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6LK	-	XCL207A3K3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.75V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6LL	-	XC9237A3LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6LL	-	XC9237A3LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6LL	-	XC9237A3LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6LL	-	XCL207A3L3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.85V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6LM	-	XC9237A3MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6LM	-	XC9237A3MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6LM	-	XC9237A3MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6LM	-	XCL207A3M3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.95V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor
6M	-	MIC5366-2.8YMT	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, CL autodischarge	MLF-4	48vm	VR4	9x	Mcr
6M	-	RP101K282D5	LVR-IC	LDO, LN, 2.85V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6M	-	RP173K441D	LVR-IC	LDO, 4.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6M	-	XC6221D27B7R	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6M	-	XC6223G2919R-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6M0	-	XC9237A40D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST	WLP-5-03	56aa*	DC1	9a	Tor
6M0	-	XC9237A40D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6EL	56dc5	DC1	9a	Tor
6M0	-	XC9237A40DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST	USP-6C	49dc5	DC1	9a	Tor
6M0	-	XCL207A403AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 4.0V±2%, 600mA	CL-2025	67dc7	DC9	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6N	-	MIC5366-2.85YMT	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, CL autodischarge	MLF-4	48vm	VR4	9x	Mcr
6N	-	RP101K292D	LVR-IC	LDO, LN, 2.9V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6N	-	RP173K451D	LVR-IC	LDO, 4.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6N	-	XC6221D28B7R	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6N	-	XC6223G3019R-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6N8	-	XC9237E08C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6N8	-	XC9237E08C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6N8	-	XC9237E08CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6N9	-	XC9237E09C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6N9	-	XC9237E09C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6N9	-	XC9237E09CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6NL	-	XC9237E0LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6NL	-	XC9237E0LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6NL	-	XC9237E0LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6NM	-	XC9237E0MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6NM	-	XC9237E0MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6NM	-	XC9237E0MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6O	-	MIC5366-2.9YMT	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, CL autodischarge	MLF-4	48vm	VR4	9x	Mcr
6P	-	MIC5366-3.0YMT	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, CL autodischarge	MLF-4	48vm	VR4	9x	Mcr
6P	-	RP101K302D	LVR-IC	LDO, LN, 3.0V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6P	-	RP173K461D	LVR-IC	LDO, 4.6V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6P	-	XC6221D29B7R	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6P	-	XC6223G3119R-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6P0	-	XC9237E10C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6P0	-	XC9237E10C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6P0	-	XC9237E10CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6P1	-	XC9237E11C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6P1	-	XC9237E11C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6P1	-	XC9237E11CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6P2	-	XC9237E12C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6P2	-	XC9237E12C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6P2	-	XC9237E12CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6P3	-	XC9237E13C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6P3	-	XC9237E13C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6P3	-	XC9237E13CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6P4	-	XC9237E14C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6P4	-	XC9237E14C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6P4	-	XC9237E14CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6P5	-	XC9237E15C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6P5	-	XC9237E15C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6P5	-	XC9237E15CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6P6	-	XC9237E16C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6P6	-	XC9237E16C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6P6	-	XC9237E16CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6P7	-	XC9237E17C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6P7	-	XC9237E17C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6P7	-	XC9237E17CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6P8	-	XC9237E18C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6P8	-	XC9237E18C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6P8	-	XC9237E18CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6P9	-	XC9237E19C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6P9	-	XC9237E19C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6P9	-	XC9237E19CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6PA	-	XC9237E1AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6PA	-	XC9237E1AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6PA	-	XC9237E1ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6PB	-	XC9237E1BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6PB	-	XC9237E1BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6PB	-	XC9237E1BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6PC	-	XC9237E1CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6PC	-	XC9237E1CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6PC	-	XC9237E1CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6PD	-	XC9237E1DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6PD	-	XC9237E1DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6PD	-	XC9237E1DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6PE	-	XC9237E1EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6PE	-	XC9237E1EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6PE	-	XC9237E1ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6PF	-	XC9237E1FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6PF	-	XC9237E1FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6PF	-	XC9237E1FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6PH	-	XC9237E1HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6PH	-	XC9237E1HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6PH	-	XC9237E1HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6PK	-	XC9237E1KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6PK	-	XC9237E1KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6PK	-	XC9237E1KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6PL	-	XC9237E1LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6PL	-	XC9237E1LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6PL	-	XC9237E1LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6PM	-	XC9237E1MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6PM	-	XC9237E1MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6PM	-	XC9237E1MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6Q	-	RP101K312D	LVR-IC	LDO, LN, 3.1V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6Q	-	RP173K471D	LVR-IC	LDO, 4.7V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6R	-	RP101K332D	LVR-IC	LDO, LN, 3.3V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6R	-	RP173K481D	LVR-IC	LDO, 4.8V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6R	-	XC6221D30B7R	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6R	-	XC6223G3219R-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6R0	-	XC9237E20C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6R0	-	XC9237E20C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6R0	-	XC9237E20CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6R1	-	XC9237E21C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6R1	-	XC9237E21C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6R1	-	XC9237E21CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6R2	-	XC9237E22C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6R2	-	XC9237E22C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6R2	-	XC9237E22CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6R3	-	XC9237E23C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6R3	-	XC9237E23C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6R3	-	XC9237E23CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6R4	-	XC9237E24C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6R4	-	XC9237E24C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6R4	-	XC9237E24CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6R5	-	XC9237E25C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6R5	-	XC9237E25C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6R5	-	XC9237E25CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6R6	-	XC9237E26C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6R6	-	XC9237E26C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6R6	-	XC9237E26CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6R7	-	XC9237E27C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6R7	-	XC9237E27C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6R7	-	XC9237E27CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6R8	-	XC9237E28C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6R8	-	XC9237E28C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6R8	-	XC9237E28CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6R9	-	XC9237E29C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6R9	-	XC9237E29C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6R9	-	XC9237E29CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6RA	-	XC9237E2AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6RA	-	XC9237E2AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6RA	-	XC9237E2ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6RB	-	XC9237E2BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6RB	-	XC9237E2BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6RB	-	XC9237E2BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6RC	-	XC9237E2CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6RC	-	XC9237E2CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6RC	-	XC9237E2CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6RD	-	XC9237E2DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6RD	-	XC9237E2DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6RD	-	XC9237E2DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6RE	-	XC9237E2EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6RE	-	XC9237E2EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6RE	-	XC9237E2ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6RF	-	XC9237E2FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6RF	-	XC9237E2FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6RF	-	XC9237E2FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6RH	-	XC9237E2HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6RH	-	XC9237E2HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6RH	-	XC9237E2HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6RK	-	XC9237E2KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6RK	-	XC9237E2KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6RK	-	XC9237E2KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6RL	-	XC9237E2LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6RL	-	XC9237E2LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6RL	-	XC9237E2LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6RM	-	XC9237E2MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6RM	-	XC9237E2MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6RM	-	XC9237E2MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6S	-	MIC5366-3.3YMT	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, CL autodischarge	MLF-4	48vm	VR4	9x	Mcr
6S	-	RP101K212D	LVR-IC	LDO, LN, 2.1V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6S	-	RP173K491D	LVR-IC	LDO, 4.9V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6S	-	XC6221D31B7R	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6S	-	XC6223G3319R-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6S0	-	XC9237E30C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6S0	-	XC9237E30C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6S0	-	XC9237E30CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6S1	-	XC9237E31C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6S1	-	XC9237E31C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6S1	-	XC9237E31CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6S2	-	XC9237E32C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6S2	-	XC9237E32C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6S2	-	XC9237E32CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6S3	-	XC9237E33C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6S3	-	XC9237E33C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6S3	-	XC9237E33CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6S4	-	XC9237E34C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6S4	-	XC9237E34C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6S4	-	XC9237E34CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6S5	-	XC9237E35C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6S5	-	XC9237E35C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6S5	-	XC9237E35CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6S6	-	XC9237E36C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6S6	-	XC9237E36C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6S6	-	XC9237E36CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6S7	-	XC9237E37C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6S7	-	XC9237E37C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6S7	-	XC9237E37CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6S8	-	XC9237E38C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6S8	-	XC9237E38C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6S8	-	XC9237E38CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6S9	-	XC9237E39C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6S9	-	XC9237E39C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6S9	-	XC9237E39CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6SA	-	XC9237E3AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6SA	-	XC9237E3AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6SA	-	XC9237E3ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6SB	-	XC9237E3BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6SB	-	XC9237E3BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6SB	-	XC9237E3BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6SC	-	XC9237E3CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6SC	-	XC9237E3CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6SC	-	XC9237E3CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6SD	-	XC9237E3DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6SD	-	XC9237E3DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6SD	-	XC9237E3DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6SE	-	XC9237E3EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6SE	-	XC9237E3EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6SE	-	XC9237E3ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6SF	-	XC9237E3FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6SF	-	XC9237E3FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6SF	-	XC9237E3FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6SH	-	XC9237E3HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6SH	-	XC9237E3HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6SH	-	XC9237E3HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6SK	-	XC9237E3KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6SK	-	XC9237E3KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6SK	-	XC9237E3KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6SL	-	XC9237E3LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6SL	-	XC9237E3LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6SL	-	XC9237E3LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6SM	-	XC9237E3MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6SM	-	XC9237E3MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6SM	-	XC9237E3MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6T	-	RP101K232D	LVR-IC	LDO, LN, 2.3V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6T	-	RP173K501D	LVR-IC	LDO, 5.0V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6T	-	XC6221D32B7R	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6T	-	XC6223G3419R-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6T0	-	XC9237E40C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6T0	-	XC9237E40C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6T0	-	XC9237E40CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6U	-	RP101K242D	LVR-IC	LDO, LN, 2.4V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6U	-	RP173K511D	LVR-IC	LDO, 5.1V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6U	-	XC6221D33B7R	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6U	-	XC6223G3519R-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6U8	-	XC9237E08D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6U8	-	XC9237E08D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6U8	-	XC9237E08DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6U9	-	XC9237E09D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6U9	-	XC9237E09D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6U9	-	XC9237E09DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6UL	-	XC9237E0LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6UL	-	XC9237E0LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6UL	-	XC9237E0LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6UM	-	XC9237E0MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6UM	-	XC9237E0MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6UM	-	XC9237E0MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6V	-	RP101K322D	LVR-IC	LDO, LN, 3.2V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6V	-	RP173K521D	LVR-IC	LDO, 5.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6V	-	XC6221D34B7R	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6V	-	XC6223G3619R-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6V0	-	XC9237E10D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6V0	-	XC9237E10D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6V0	-	XC9237E10DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6V1	-	XC9237E11D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6V1	-	XC9237E11D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6V1	-	XC9237E11DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6V2	-	XC9237E12D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6V2	-	XC9237E12D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6V2	-	XC9237E12DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6V3	-	XC9237E13D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6V3	-	XC9237E13D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6V3	-	XC9237E13DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6V4	-	XC9237E14D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6V4	-	XC9237E14D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6V4	-	XC9237E14DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6V5	-	XC9237E15D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6V5	-	XC9237E15D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6V5	-	XC9237E15DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6V6	-	XC9237E16D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6V6	-	XC9237E16D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6V6	-	XC9237E16DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6V7	-	XC9237E17D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6V7	-	XC9237E17D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6V7	-	XC9237E17DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6V8	-	XC9237E18D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6V8	-	XC9237E18D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6V8	-	XC9237E18DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6V9	-	XC9237E19D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6V9	-	XC9237E19D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6V9	-	XC9237E19DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6VA	-	XC9237E1AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6VA	-	XC9237E1AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6VA	-	XC9237E1ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6VB	-	XC9237E1BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6VB	-	XC9237E1BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6VB	-	XC9237E1BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6VC	-	XC9237E1CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6VC	-	XC9237E1CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6VC	-	XC9237E1CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6VD	-	XC9237E1DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6VD	-	XC9237E1DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6VD	-	XC9237E1DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6VE	-	XC9237E1ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6VE	-	XC9237E1ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6VE	-	XC9237E1EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6VF	-	XC9237E1FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6VF	-	XC9237E1FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6VF	-	XC9237E1FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6VH	-	XC9237E1HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6VH	-	XC9237E1HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6VH	-	XC9237E1HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6VK	-	XC9237E1KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6VK	-	XC9237E1KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6VK	-	XC9237E1KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6VL	-	XC9237E1LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6VL	-	XC9237E1LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6VL	-	XC9237E1LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6VM	-	XC9237E1MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6VM	-	XC9237E1MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6VM	-	XC9237E1MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6W	-	RP101K222D	LVR-IC	LDO, LN, 2.2V±0.8%, 300mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
6W	-	RP173K531D	LVR-IC	LDO, 5.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6X	-	RP173K541D	LVR-IC	LDO, 5.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6X	-	XC6221D35B7R	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6X	-	XC6223G3719R-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6X0	-	XC9237E20D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6X0	-	XC9237E20D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6X0	-	XC9237E20DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6X1	-	XC9237E21D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6X1	-	XC9237E21D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6X1	-	XC9237E21DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6X2	-	XC9237E22D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6X2	-	XC9237E22D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6X2	-	XC9237E22DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6X3	-	XC9237E23D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6X3	-	XC9237E23D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6X3	-	XC9237E23DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6X4	-	XC9237E24D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6X4	-	XC9237E24D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6X4	-	XC9237E24DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6X5	-	XC9237E25D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6X5	-	XC9237E25D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6X5	-	XC9237E25DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6X6	-	XC9237E26D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6X6	-	XC9237E26D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6X6	-	XC9237E26DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6X7	-	XC9237E27D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6X7	-	XC9237E27D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6X7	-	XC9237E27DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6X8	-	XC9237E28D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6X8	-	XC9237E28D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6X8	-	XC9237E28DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6X9	-	XC9237E29D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6X9	-	XC9237E29D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6X9	-	XC9237E29DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6XA	-	XC9237E2AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6XA	-	XC9237E2AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6XA	-	XC9237E2ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6XB	-	XC9237E2BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6XB	-	XC9237E2BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6XB	-	XC9237E2BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6XC	-	XC9237E2CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6XC	-	XC9237E2CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6XC	-	XC9237E2CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6XD	-	XC9237E2DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6XD	-	XC9237E2DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6XD	-	XC9237E2DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6XE	-	XC9237E2ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6XE	-	XC9237E2ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6XE	-	XC9237E2EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6XF	-	XC9237E2FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6XF	-	XC9237E2FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6XF	-	XC9237E2FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6XH	-	XC9237E2HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6XH	-	XC9237E2HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6XH	-	XC9237E2HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6XK	-	XC9237E2KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6XK	-	XC9237E2KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6XK	-	XC9237E2KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6XL	-	XC9237E2LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6XL	-	XC9237E2LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6XL	-	XC9237E2LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6XM	-	XC9237E2MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6XM	-	XC9237E2MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6XM	-	XC9237E2MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6Y	-	RP173K551D	LVR-IC	LDO, 5.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
6Y	-	XC6221D36B7R	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6Y	-	XC6223G3819R-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6Y0	-	XC9237E30D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6Y0	-	XC9237E30D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6Y0	-	XC9237E30DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6Y1	-	XC9237E31D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6Y1	-	XC9237E31D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6Y1	-	XC9237E31DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6Y2	-	XC9237E32D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6Y2	-	XC9237E32D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6Y2	-	XC9237E32DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6Y3	-	XC9237E33D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6Y3	-	XC9237E33D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6Y3	-	XC9237E33DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6Y4	-	XC9237E34D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6Y4	-	XC9237E34D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6Y4	-	XC9237E34DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6Y5	-	XC9237E35D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6Y5	-	XC9237E35D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6Y5	-	XC9237E35DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6Y6	-	XC9237E36D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6Y6	-	XC9237E36D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6Y6	-	XC9237E36DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6Y7	-	XC9237E37D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6Y7	-	XC9237E37D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6Y7	-	XC9237E37DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6Y8	-	XC9237E38D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6Y8	-	XC9237E38D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6Y8	-	XC9237E38DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6Y9	-	XC9237E39D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6Y9	-	XC9237E39D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6Y9	-	XC9237E39DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6YA	-	XC9237E3AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6YA	-	XC9237E3AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6YA	-	XC9237E3ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6YB	-	XC9237E3BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6YB	-	XC9237E3BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6YB	-	XC9237E3BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6YC	-	XC9237E3CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6YC	-	XC9237E3CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6YC	-	XC9237E3CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6YD	-	XC9237E3DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6YD	-	XC9237E3DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6YD	-	XC9237E3DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6YE	-	XC9237E3ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6YE	-	XC9237E3ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6YE	-	XC9237E3EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6YF	-	XC9237E3FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6YF	-	XC9237E3FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6YF	-	XC9237E3FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6YH	-	XC9237E3HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6YH	-	XC9237E3HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6YH	-	XC9237E3HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
6YK	-	XC9237E3KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6YK	-	XC9237E3KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6YK	-	XC9237E3KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6YL	-	XC9237E3LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6YL	-	XC9237E3LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6YL	-	XC9237E3LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6YM	-	XC9237E3MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6YM	-	XC9237E3MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6YM	-	XC9237E3MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
6Z	-	XC6221D37B7R	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
6Z	-	XC6223G3919R-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
6Z0	-	XC9237E40D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
6Z0	-	XC9237E40D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
6Z0	-	XC9237E40DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
70	-	EUA2011AH	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 2.5W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Eut
70	-	RP110L131D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
70	-	XC6221D38B7R	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
71	-	RP110L141D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
71	-	XC6221D39B7R	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
7112	-	Si91871DMP-12-T1	LVR-IC	LDO, 1.2V±2%, 400mA, +CE	MLP35	62we	VR7	9m	Vs
7115	-	Si91871DMP-15-T1	LVR-IC	LDO, 1.5V±2%, 400mA, +CE	MLP35	62we	VR7	9m	Vs
7118	-	Si91871DMP-18-T1	LVR-IC	LDO, 1.8V±2%, 400mA, +CE	MLP35	62we	VR7	9m	Vs
7120	-	Si91871DMP-20-T1	LVR-IC	LDO, 2.0V±2%, 400mA, +CE	MLP35	62we	VR7	9m	Vs
7122	-	Si91871DMP-22-T1	LVR-IC	LDO, 2.2V±2%, 400mA, +CE	MLP35	62we	VR7	9m	Vs
7125	-	Si91871DMP-25-T1	LVR-IC	LDO, 2.5V±2%, 400mA, +CE	MLP35	62we	VR7	9m	Vs
7126	-	Si91871DMP-26-T1	LVR-IC	LDO, 2.6V±2%, 400mA, +CE	MLP35	62we	VR7	9m	Vs
7127	-	Si91871DMP-27-T1	LVR-IC	LDO, 2.7V±2%, 400mA, +CE	MLP35	62we	VR7	9m	Vs
7128	-	Si91871DMP-28-T1	LVR-IC	LDO, 2.8V±2%, 400mA, +CE	MLP35	62we	VR7	9m	Vs
71285	-	Si91871DMP-285-T1	LVR-IC	LDO, 2.85V±2%, 400mA, +CE	MLP35	62we	VR7	9m	Vs
7129	-	Si91871DMP-29-T1	LVR-IC	LDO, 2.9V±2%, 400mA, +CE	MLP35	62we	VR7	9m	Vs
7130	-	Si91871DMP-30-T1	LVR-IC	LDO, 3.0V±2%, 400mA, +CE	MLP35	62we	VR7	9m	Vs
7133	-	Si91871DMP-33-T1	LVR-IC	LDO, 3.3V±2%, 400mA, +CE	MLP35	62we	VR7	9m	Vs
7135	-	Si91871DMP-35-T1	LVR-IC	LDO, 3.5V±2%, 400mA, +CE	MLP35	62we	VR7	9m	Vs
7136	-	Si91871DMP-36-T1	LVR-IC	LDO, 3.6V±2%, 400mA, +CE	MLP35	62we	VR7	9m	Vs
7150	-	Si91871DMP-50-T1	LVR-IC	LDO, 5.0V±2%, 400mA, +CE	MLP35	62we	VR7	9m	Vs
72	-	RP110L151D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
72	-	XC6221D40B7R	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
72	-	XC6223H1219R-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7201A	-	EUP7201-1.8/2.8J	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	DFN-6	56xv	VR19	9m	Eut
73	-	BAS40T-HT3	Si-diode	SBD, 40V, 200mA, Vf<1V(40mA), 5ns	LLP75-3B	108dc	-	9m	Vs
73	-	RP110L161D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
73	-	XC6221D41B7R	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
73	-	XC6223H1319R-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
74	-	BAS40T-04-HT3	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	LLP75-3B	108dl	-	9m	Vs
74	-	RP110L171D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
74	-	XC6221D42B7R	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
74	-	XC6223H1419R-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
75	-	BAS40T-05-HT3	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	LLP75-3B	108dg	-	9m	Vs
75	-	RP110L181D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
75	-	XC6221D43B7R	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
75	-	XC6223H1519R-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
76	-	BAS40T-06-HT3	Si-diode	Dual, SBD, 40V, 200mA, Vf<1V(40mA), 5ns	LLP75-3B	108df	-	9m	Vs
76	-	RP110L181D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
76	-	XC6221D44B7R	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
76	-	XC6223H1619R-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
77	-	RP110L191D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
77	-	XC6217D08A7R-G	LVR-IC	LDO, 0.85V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
77	-	XC6221D45B7R	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
77	-	XC6223H1719R-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
78	-	RP110L201D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
78	-	XC6217D09A7R-G	LVR-IC	LDO, 0.95V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
78	-	XC6221D46B7R	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
78	-	XC6223H1819R-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7832A	-	AK7832AB	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2W(5V/8Ω), I2C, ALC	BGA-24	39	-	9a	Ask
7839	-	BU7839GVW	Lin-IC	16-bit DAC, AF PA 2x12mW(5V/32Ω), mute, I2C	BGA-24	39	-	9g	Rhm
78A0	-	GSI8890AW	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.5W(5V/8Ω), shutdown	BGA-9	39	-	9a	Go2
79	-	RP110L211D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
79	-	XC6217D10A7R-G	LVR-IC	LDO, 1.05V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
79	-	XC6221D47B7R	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
79	-	XC6223H1919R-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7A	-	RP103K121B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7A	-	RP111L071B	LVR-IC	LDO, 0.7V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7A	-	RP200K081D	LVR-IC	LDO, 0.8V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7A	-	RP202K081B	LVR-IC	LDO, 0.8V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7A	-	XC6217D11A7R-G	LVR-IC	LDO, 1.15V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7A	-	XC6221D48B7R	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
7A	-	XC6223H2019R-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7A116	-	XC6105A116ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A117	-	XC6105A117ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A118	-	XC6105A118ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A119	-	XC6105A119ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A120	-	XC6105A120ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A121	-	XC6105A121ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A122	-	XC6105A122ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A123	-	XC6105A123ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A124	-	XC6105A124ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A125	-	XC6105A125ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A126	-	XC6105A126ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A127	-	XC6105A127ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A128	-	XC6105A128ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A129	-	XC6105A129ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A130	-	XC6105A130ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A131	-	XC6105A131ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A132	-	XC6105A132ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A133	-	XC6105A133ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A134	-	XC6105A134ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A135	-	XC6105A135ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A136	-	XC6105A136ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A137	-	XC6105A137ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A138	-	XC6105A138ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A139	-	XC6105A139ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A140	-	XC6105A140ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A141	-	XC6105A141ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A142	-	XC6105A142ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A143	-	XC6105A143ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A144	-	XC6105A144ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A145	-	XC6105A145ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A146	-	XC6105A146ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A147	-	XC6105A147ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A148	-	XC6105A148ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A149	-	XC6105A149ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A150	-	XC6105A150ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A216	-	XC6105A216ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A217	-	XC6105A217ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A218	-	XC6105A218ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A219	-	XC6105A219ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A220	-	XC6105A220ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A221	-	XC6105A221ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A222	-	XC6105A222ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A223	-	XC6105A223ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A224	-	XC6105A224ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A225	-	XC6105A225ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A226	-	XC6105A226ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A227	-	XC6105A227ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A228	-	XC6105A228ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A229	-	XC6105A229ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A230	-	XC6105A230ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A231	-	XC6105A231ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A232	-	XC6105A232ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A233	-	XC6105A233ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A234	-	XC6105A234ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A235	-	XC6105A235ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A236	-	XC6105A236ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A237	-	XC6105A237ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A238	-	XC6105A238ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A239	-	XC6105A239ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A240	-	XC6105A240ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A241	-	XC6105A241ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A242	-	XC6105A242ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A243	-	XC6105A243ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7A244	-	XC6105A244ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A245	-	XC6105A245ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A246	-	XC6105A246ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A247	-	XC6105A247ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A248	-	XC6105A248ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A249	-	XC6105A249ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A250	-	XC6105A250ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A316	-	XC6105A316ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A317	-	XC6105A317ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A318	-	XC6105A318ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A319	-	XC6105A319ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A320	-	XC6105A320ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A321	-	XC6105A321ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A322	-	XC6105A322ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A323	-	XC6105A323ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A324	-	XC6105A324ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A325	-	XC6105A325ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A326	-	XC6105A326ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A327	-	XC6105A327ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A328	-	XC6105A328ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A329	-	XC6105A329ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A330	-	XC6105A330ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A331	-	XC6105A331ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A332	-	XC6105A332ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A333	-	XC6105A333ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A334	-	XC6105A334ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A335	-	XC6105A335ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A336	-	XC6105A336ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A337	-	XC6105A337ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A338	-	XC6105A338ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A339	-	XC6105A339ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A340	-	XC6105A340ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A341	-	XC6105A341ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A342	-	XC6105A342ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A343	-	XC6105A343ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A344	-	XC6105A344ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A345	-	XC6105A345ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A346	-	XC6105A346ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A347	-	XC6105A347ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A348	-	XC6105A348ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A349	-	XC6105A349ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A350	-	XC6105A350ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A416	-	XC6105A416ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A417	-	XC6105A417ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A418	-	XC6105A418ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A419	-	XC6105A419ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A420	-	XC6105A420ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A421	-	XC6105A421ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A422	-	XC6105A422ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A423	-	XC6105A423ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A424	-	XC6105A424ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A425	-	XC6105A425ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A426	-	XC6105A426ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A427	-	XC6105A427ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A428	-	XC6105A428ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A429	-	XC6105A429ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A430	-	XC6105A430ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A431	-	XC6105A431ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A432	-	XC6105A432ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A433	-	XC6105A433ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A434	-	XC6105A434ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A435	-	XC6105A435ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A436	-	XC6105A436ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A437	-	XC6105A437ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A438	-	XC6105A438ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A439	-	XC6105A439ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A440	-	XC6105A440ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A441	-	XC6105A441ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A442	-	XC6105A442ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A443	-	XC6105A443ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7A444	-	XC6105A444ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A445	-	XC6105A445ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A446	-	XC6105A446ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A447	-	XC6105A447ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A448	-	XC6105A448ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A449	-	XC6105A449ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A450	-	XC6105A450ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A516	-	XC6105A516ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A517	-	XC6105A517ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A518	-	XC6105A518ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A519	-	XC6105A519ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A520	-	XC6105A520ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A521	-	XC6105A521ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A522	-	XC6105A522ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A523	-	XC6105A523ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A524	-	XC6105A524ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A525	-	XC6105A525ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A526	-	XC6105A526ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A527	-	XC6105A527ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A528	-	XC6105A528ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A529	-	XC6105A529ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A530	-	XC6105A530ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A531	-	XC6105A531ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A532	-	XC6105A532ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A533	-	XC6105A533ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A534	-	XC6105A534ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A535	-	XC6105A535ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A536	-	XC6105A536ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A537	-	XC6105A537ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A538	-	XC6105A538ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A539	-	XC6105A539ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A540	-	XC6105A540ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A541	-	XC6105A541ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A542	-	XC6105A542ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A543	-	XC6105A543ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A544	-	XC6105A544ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A545	-	XC6105A545ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A546	-	XC6105A546ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A547	-	XC6105A547ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A548	-	XC6105A548ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A549	-	XC6105A549ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A550	-	XC6105A550ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A616	-	XC6105A616ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A617	-	XC6105A617ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A618	-	XC6105A618ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A619	-	XC6105A619ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A620	-	XC6105A620ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A621	-	XC6105A621ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A622	-	XC6105A622ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A623	-	XC6105A623ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A624	-	XC6105A624ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A625	-	XC6105A625ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A626	-	XC6105A626ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A627	-	XC6105A627ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A628	-	XC6105A628ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A629	-	XC6105A629ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A630	-	XC6105A630ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A631	-	XC6105A631ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A632	-	XC6105A632ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A633	-	XC6105A633ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A634	-	XC6105A634ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A635	-	XC6105A635ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A636	-	XC6105A636ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A637	-	XC6105A637ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A638	-	XC6105A638ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A639	-	XC6105A639ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A640	-	XC6105A640ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A641	-	XC6105A641ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A642	-	XC6105A642ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A643	-	XC6105A643ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7A644	-	XC6105A644ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A645	-	XC6105A645ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A646	-	XC6105A646ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A647	-	XC6105A647ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A648	-	XC6105A648ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A649	-	XC6105A649ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A650	-	XC6105A650ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
7A8	-	XC9236F08C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7A8	-	XC9236F08C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7A8	-	XC9236F08CER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7A9	-	XC9236F09C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7A9	-	XC9236F09C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7A9	-	XC9236F09CER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7AA	-	XC6602A051ER-G	LVR-IC	LDO, 0.5V±15mV, 1A, +CE, soft start	USP-6C	49gm	VR11	9a	Tor
7AB	-	XC6602A061ER-G	LVR-IC	LDO, 0.6V±15mV, 1A, +CE, soft start	USP-6C	49gm	VR11	9a	Tor
7AC	-	XC6602A071ER-G	LVR-IC	LDO, 0.7V±15mV, 1A, +CE, soft start	USP-6C	49gm	VR11	9a	Tor
7AD	-	XC6602A081ER-G	LVR-IC	LDO, 0.8V±15mV, 1A, +CE, soft start	USP-6C	49gm	VR11	9a	Tor
7AE	-	XC6602A091ER-G	LVR-IC	LDO, 0.9V±15mV, 1A, +CE, soft start	USP-6C	49gm	VR11	9a	Tor
7AF	-	XC6602A101ER-G	LVR-IC	LDO, 1.0V±15mV, 1A, +CE, soft start	USP-6C	49gm	VR11	9a	Tor
7AL	-	XC9236F0LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7AL	-	XC9236F0LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7AL	-	XC9236F0LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7AM	-	XC6602A141ER-G	LVR-IC	LDO, 1.4V±20mV, 1A, +CE, soft start	USP-6C	49gm	VR11	9a	Tor
7AM	-	XC9236F0MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7AM	-	XC9236F0MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7AM	-	XC9236F0MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7AN	-	XC6602A151ER-G	LVR-IC	LDO, 1.5V±20mV, 1A, +CE, soft start	USP-6C	49gm	VR11	9a	Tor
7AP	-	XC6602A161ER-G	LVR-IC	LDO, 1.6V±20mV, 1A, +CE, soft start	USP-6C	49gm	VR11	9a	Tor
7AR	-	XC6602A171ER-G	LVR-IC	LDO, 1.7V±20mV, 1A, +CE, soft start	USP-6C	49gm	VR11	9a	Tor
7AS	-	XC6602A181ER-G	LVR-IC	LDO, 1.8V±20mV, 1A, +CE, soft start	USP-6C	49gm	VR11	9a	Tor
7B	-	RP103K131B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7B	-	RP111L071B5	LVR-IC	LDO, 0.75V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7B	-	RP200K091D	LVR-IC	LDO, 0.9V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7B	-	RP202K091B	LVR-IC	LDO, 0.9V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7B	-	XC6217D12A7R-G	LVR-IC	LDO, 1.25V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7B	-	XC6221D49B7R	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9a	Tor
7B	-	XC6223H2119R-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7B0	-	XC9236F10C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7B0	-	XC9236F10C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7B0	-	XC9236F10CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7B1	-	XC9236F11C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7B1	-	XC9236F11C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7B1	-	XC9236F11CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7B2	-	XC9236F12C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7B2	-	XC9236F12C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7B2	-	XC9236F12CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7B216	-	XC6105B216ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B217	-	XC6105B217ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B218	-	XC6105B218ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B219	-	XC6105B219ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B220	-	XC6105B220ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B221	-	XC6105B221ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B222	-	XC6105B222ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B223	-	XC6105B223ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B224	-	XC6105B224ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B225	-	XC6105B225ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B226	-	XC6105B226ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B227	-	XC6105B227ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B228	-	XC6105B228ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B229	-	XC6105B229ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B230	-	XC6105B230ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B231	-	XC6105B231ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B232	-	XC6105B232ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B233	-	XC6105B233ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B234	-	XC6105B234ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B235	-	XC6105B235ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B236	-	XC6105B236ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B237	-	XC6105B237ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B238	-	XC6105B238ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B239	-	XC6105B239ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7B240	-	XC6105B240ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B241	-	XC6105B241ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B242	-	XC6105B242ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B243	-	XC6105B243ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B244	-	XC6105B244ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B245	-	XC6105B245ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B246	-	XC6105B246ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B247	-	XC6105B247ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B248	-	XC6105B248ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B249	-	XC6105B249ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B250	-	XC6105B250ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B3	-	XC9236F13C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7B3	-	XC9236F13C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7B3	-	XC9236F13CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7B316	-	XC6105B316ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B317	-	XC6105B317ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B318	-	XC6105B318ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B319	-	XC6105B319ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B320	-	XC6105B320ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B321	-	XC6105B321ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B322	-	XC6105B322ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B323	-	XC6105B323ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B324	-	XC6105B324ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B325	-	XC6105B325ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B326	-	XC6105B326ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B327	-	XC6105B327ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B328	-	XC6105B328ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B329	-	XC6105B329ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B330	-	XC6105B330ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B331	-	XC6105B331ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B332	-	XC6105B332ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B333	-	XC6105B333ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B334	-	XC6105B334ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B335	-	XC6105B335ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B336	-	XC6105B336ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B337	-	XC6105B337ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B338	-	XC6105B338ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B339	-	XC6105B339ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B340	-	XC6105B340ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B341	-	XC6105B341ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B342	-	XC6105B342ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B343	-	XC6105B343ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B344	-	XC6105B344ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B345	-	XC6105B345ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B346	-	XC6105B346ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B347	-	XC6105B347ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B348	-	XC6105B348ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B349	-	XC6105B349ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B350	-	XC6105B350ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B4	-	XC9236F14C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7B4	-	XC9236F14C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7B4	-	XC9236F14CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7B416	-	XC6105B416ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B417	-	XC6105B417ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B418	-	XC6105B418ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B419	-	XC6105B419ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B420	-	XC6105B420ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B421	-	XC6105B421ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B422	-	XC6105B422ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B423	-	XC6105B423ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B424	-	XC6105B424ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B425	-	XC6105B425ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B426	-	XC6105B426ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B427	-	XC6105B427ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B428	-	XC6105B428ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B429	-	XC6105B429ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B430	-	XC6105B430ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B431	-	XC6105B431ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B432	-	XC6105B432ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B433	-	XC6105B433ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7B434	-	XC6105B434ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B435	-	XC6105B435ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B436	-	XC6105B436ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B437	-	XC6105B437ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B438	-	XC6105B438ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B439	-	XC6105B439ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B440	-	XC6105B440ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B441	-	XC6105B441ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B442	-	XC6105B442ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B443	-	XC6105B443ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B444	-	XC6105B444ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B445	-	XC6105B445ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B446	-	XC6105B446ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B447	-	XC6105B447ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B448	-	XC6105B448ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B449	-	XC6105B449ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B450	-	XC6105B450ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B5	-	XC9236F15C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7B5	-	XC9236F15C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7B5	-	XC9236F15CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7B516	-	XC6105B516ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B517	-	XC6105B517ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B518	-	XC6105B518ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B519	-	XC6105B519ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B520	-	XC6105B520ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B521	-	XC6105B521ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B522	-	XC6105B522ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B523	-	XC6105B523ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B524	-	XC6105B524ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B525	-	XC6105B525ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B526	-	XC6105B526ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B527	-	XC6105B527ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B528	-	XC6105B528ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B529	-	XC6105B529ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B530	-	XC6105B530ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B531	-	XC6105B531ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B532	-	XC6105B532ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B533	-	XC6105B533ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B534	-	XC6105B534ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B535	-	XC6105B535ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B536	-	XC6105B536ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B537	-	XC6105B537ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B538	-	XC6105B538ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B539	-	XC6105B539ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B540	-	XC6105B540ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B541	-	XC6105B541ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B542	-	XC6105B542ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B543	-	XC6105B543ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B544	-	XC6105B544ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B545	-	XC6105B545ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B546	-	XC6105B546ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B547	-	XC6105B547ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B548	-	XC6105B548ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B549	-	XC6105B549ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B550	-	XC6105B550ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B6	-	XC9236F16C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7B6	-	XC9236F16C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7B6	-	XC9236F16CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7B616	-	XC6105B616ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B617	-	XC6105B617ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B618	-	XC6105B618ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B619	-	XC6105B619ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B620	-	XC6105B620ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B621	-	XC6105B621ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B622	-	XC6105B622ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B623	-	XC6105B623ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B624	-	XC6105B624ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B625	-	XC6105B625ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B626	-	XC6105B626ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B627	-	XC6105B627ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7B628	-	XC6105B628ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B629	-	XC6105B629ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B630	-	XC6105B630ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B631	-	XC6105B631ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B632	-	XC6105B632ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B633	-	XC6105B633ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B634	-	XC6105B634ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B635	-	XC6105B635ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B636	-	XC6105B636ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B637	-	XC6105B637ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B638	-	XC6105B638ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B639	-	XC6105B639ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B640	-	XC6105B640ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B641	-	XC6105B641ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B642	-	XC6105B642ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B643	-	XC6105B643ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B644	-	XC6105B644ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B645	-	XC6105B645ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B646	-	XC6105B646ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B647	-	XC6105B647ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B648	-	XC6105B648ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B649	-	XC6105B649ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B650	-	XC6105B650ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
7B7	-	XC9236F17C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7B7	-	XC9236F17C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7B7	-	XC9236F17CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7B8	-	XC9236F18C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7B8	-	XC9236F18C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7B8	-	XC9236F18CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7B9	-	XC9236F19C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7B9	-	XC9236F19C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7B9	-	XC9236F19CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7BA	-	XC6602B051ER-G	LVR-IC	LDO, 0.5V±15mV, 1A, +CE	USP-6C	49gm	VR11	9a	Tor
7BA	-	XC9236F1AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7BA	-	XC9236F1AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7BA	-	XC9236F1ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7BB	-	XC6602B061ER-G	LVR-IC	LDO, 0.6V±15mV, 1A, +CE	USP-6C	49gm	VR11	9a	Tor
7BB	-	XC9236F1BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7BB	-	XC9236F1BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7BB	-	XC9236F1BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7BC	-	XC6602B071ER-G	LVR-IC	LDO, 0.7V±15mV, 1A, +CE	USP-6C	49gm	VR11	9a	Tor
7BC	-	XC9236F1CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7BC	-	XC9236F1CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7BC	-	XC9236F1CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7BD	-	XC6602B081ER-G	LVR-IC	LDO, 0.8V±15mV, 1A, +CE	USP-6C	49gm	VR11	9a	Tor
7BD	-	XC9236F1DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7BD	-	XC9236F1DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7BD	-	XC9236F1DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7BE	-	XC6602B091ER-G	LVR-IC	LDO, 0.9V±15mV, 1A, +CE	USP-6C	49gm	VR11	9a	Tor
7BE	-	XC9236F1EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7BE	-	XC9236F1EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7BE	-	XC9236F1ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7BF	-	XC6602B101ER-G	LVR-IC	LDO, 1.0V±15mV, 1A, +CE	USP-6C	49gm	VR11	9a	Tor
7BF	-	XC9236F1FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7BF	-	XC9236F1FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7BF	-	XC9236F1FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7BH	-	XC6602B111ER-G	LVR-IC	LDO, 1.1V±15mV, 1A, +CE	USP-6C	49gm	VR11	9a	Tor
7BH	-	XC9236F1HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7BH	-	XC9236F1HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7BH	-	XC9236F1HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7BK	-	XC6602B121ER-G	LVR-IC	LDO, 1.2V±20mV, 1A, +CE	USP-6C	49gm	VR11	9a	Tor
7BK	-	XC9236F1KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7BK	-	XC9236F1KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7BK	-	XC9236F1KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7BL	-	XC6602B131ER-G	LVR-IC	LDO, 1.3V±20mV, 1A, +CE	USP-6C	49gm	VR11	9a	Tor
7BL	-	XC9236F1LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7BL	-	XC9236F1LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7BL	-	XC9236F1LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7BM	-	XC6602B141ER-G	LVR-IC	LDO, 1.4V±20mV, 1A, +CE	USP-6C	49gm	VR11	9a	Tor
7BM	-	XC9236F1MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7BM	-	XC9236F1MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7BM	-	XC9236F1MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7BN	-	XC6602B151ER-G	LVR-IC	LDO, 1.5V±20mV, 1A, +CE	USP-6C	49gm	VR11	9a	Tor
7BP	-	XC6602B161ER-G	LVR-IC	LDO, 1.6V±20mV, 1A, +CE	USP-6C	49gm	VR11	9a	Tor
7BR	-	XC6602B171ER-G	LVR-IC	LDO, 1.7V±20mV, 1A, +CE	USP-6C	49gm	VR11	9a	Tor
7BS	-	XC6602B181ER-G	LVR-IC	LDO, 1.8V±20mV, 1A, +CE	USP-6C	49gm	VR11	9a	Tor
7C	-	RP103K151B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7C	-	RP111L081B	LVR-IC	LDO, 0.8V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7C	-	RP200K101D	LVR-IC	LDO, 1.0V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7C	-	RP202K101B	LVR-IC	LDO, 1.0V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7C	-	XC6217D13A7R-G	LVR-IC	LDO, 1.35V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7C	-	XC6223H2219R-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7C0	-	XC9236F20C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7C0	-	XC9236F20C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7C0	-	XC9236F20CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7C1	-	XC9236F21C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7C1	-	XC9236F21C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7C1	-	XC9236F21CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7C2	-	XC9236F22C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7C2	-	XC9236F22C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7C2	-	XC9236F22CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7C216	-	XC6105C216ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C217	-	XC6105C217ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C218	-	XC6105C218ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C219	-	XC6105C219ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C220	-	XC6105C220ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C221	-	XC6105C221ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C222	-	XC6105C222ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C223	-	XC6105C223ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C224	-	XC6105C224ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C225	-	XC6105C225ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C226	-	XC6105C226ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C227	-	XC6105C227ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C228	-	XC6105C228ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C229	-	XC6105C229ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C230	-	XC6105C230ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C231	-	XC6105C231ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C232	-	XC6105C232ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C233	-	XC6105C233ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C234	-	XC6105C234ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C235	-	XC6105C235ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C236	-	XC6105C236ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C237	-	XC6105C237ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C238	-	XC6105C238ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C239	-	XC6105C239ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C240	-	XC6105C240ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C241	-	XC6105C241ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C242	-	XC6105C242ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C243	-	XC6105C243ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C244	-	XC6105C244ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C245	-	XC6105C245ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C246	-	XC6105C246ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C247	-	XC6105C247ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C248	-	XC6105C248ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C249	-	XC6105C249ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C250	-	XC6105C250ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C3	-	XC9236F23C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7C3	-	XC9236F23C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7C3	-	XC9236F23CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7C316	-	XC6105C316ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C317	-	XC6105C317ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C318	-	XC6105C318ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C319	-	XC6105C319ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C320	-	XC6105C320ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C321	-	XC6105C321ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C322	-	XC6105C322ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C323	-	XC6105C323ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C324	-	XC6105C324ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C325	-	XC6105C325ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C326	-	XC6105C326ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7C327	-	XC6105C327ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C328	-	XC6105C328ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C329	-	XC6105C329ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C330	-	XC6105C330ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C331	-	XC6105C331ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C332	-	XC6105C332ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C333	-	XC6105C333ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C334	-	XC6105C334ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C335	-	XC6105C335ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C336	-	XC6105C336ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C337	-	XC6105C337ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C338	-	XC6105C338ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C339	-	XC6105C339ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C340	-	XC6105C340ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C341	-	XC6105C341ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C342	-	XC6105C342ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C343	-	XC6105C343ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C344	-	XC6105C344ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C345	-	XC6105C345ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C346	-	XC6105C346ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C347	-	XC6105C347ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C348	-	XC6105C348ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C349	-	XC6105C349ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C350	-	XC6105C350ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C4	-	XC9236F24C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7C4	-	XC9236F24C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7C4	-	XC9236F24CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7C416	-	XC6105C416ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C417	-	XC6105C417ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C418	-	XC6105C418ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C419	-	XC6105C419ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C420	-	XC6105C420ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C421	-	XC6105C421ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C422	-	XC6105C422ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C423	-	XC6105C423ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C424	-	XC6105C424ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C425	-	XC6105C425ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C426	-	XC6105C426ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C427	-	XC6105C427ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C428	-	XC6105C428ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C429	-	XC6105C429ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C430	-	XC6105C430ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C431	-	XC6105C431ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C432	-	XC6105C432ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C433	-	XC6105C433ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C434	-	XC6105C434ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C435	-	XC6105C435ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C436	-	XC6105C436ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C437	-	XC6105C437ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C438	-	XC6105C438ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C439	-	XC6105C439ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C440	-	XC6105C440ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C441	-	XC6105C441ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C442	-	XC6105C442ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C443	-	XC6105C443ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C444	-	XC6105C444ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C445	-	XC6105C445ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C446	-	XC6105C446ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C447	-	XC6105C447ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C448	-	XC6105C448ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C449	-	XC6105C449ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C450	-	XC6105C450ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C5	-	XC9236F25C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7C5	-	XC9236F25C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7C5	-	XC9236F25CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7C516	-	XC6105C516ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C517	-	XC6105C517ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C518	-	XC6105C518ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C519	-	XC6105C519ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C520	-	XC6105C520ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7C521	-	XC6105C521ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C522	-	XC6105C522ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C523	-	XC6105C523ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C524	-	XC6105C524ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C525	-	XC6105C525ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C526	-	XC6105C526ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C527	-	XC6105C527ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C528	-	XC6105C528ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C529	-	XC6105C529ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C530	-	XC6105C530ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C531	-	XC6105C531ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C532	-	XC6105C532ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C533	-	XC6105C533ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C534	-	XC6105C534ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C535	-	XC6105C535ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C536	-	XC6105C536ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C537	-	XC6105C537ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C538	-	XC6105C538ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C539	-	XC6105C539ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C540	-	XC6105C540ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C541	-	XC6105C541ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C542	-	XC6105C542ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C543	-	XC6105C543ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C544	-	XC6105C544ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C545	-	XC6105C545ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C546	-	XC6105C546ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C547	-	XC6105C547ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C548	-	XC6105C548ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C549	-	XC6105C549ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C550	-	XC6105C550ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C6	-	XC9236F26C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7C6	-	XC9236F26C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7C6	-	XC9236F26CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7C616	-	XC6105C616ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C617	-	XC6105C617ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C618	-	XC6105C618ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C619	-	XC6105C619ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C620	-	XC6105C620ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C621	-	XC6105C621ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C622	-	XC6105C622ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C623	-	XC6105C623ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C624	-	XC6105C624ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C625	-	XC6105C625ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C626	-	XC6105C626ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C627	-	XC6105C627ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C628	-	XC6105C628ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C629	-	XC6105C629ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C630	-	XC6105C630ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C631	-	XC6105C631ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C632	-	XC6105C632ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C633	-	XC6105C633ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C634	-	XC6105C634ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C635	-	XC6105C635ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C636	-	XC6105C636ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C637	-	XC6105C637ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C638	-	XC6105C638ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C639	-	XC6105C639ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C640	-	XC6105C640ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C641	-	XC6105C641ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C642	-	XC6105C642ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C643	-	XC6105C643ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C644	-	XC6105C644ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C645	-	XC6105C645ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C646	-	XC6105C646ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C647	-	XC6105C647ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C648	-	XC6105C648ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C649	-	XC6105C649ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C650	-	XC6105C650ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
7C7	-	XC9236F27C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7C7	-	XC9236F27C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7C7	-	XC9236F27CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7C8	-	XC9236F28C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7C8	-	XC9236F28C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7C8	-	XC9236F28CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7C9	-	XC9236F29C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7C9	-	XC9236F29C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7C9	-	XC9236F29CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7CA	-	XC9236F2AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7CA	-	XC9236F2AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7CA	-	XC9236F2ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7CB	-	XC9236F2BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7CB	-	XC9236F2BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7CB	-	XC9236F2BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7CC	-	XC9236F2CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7CC	-	XC9236F2CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7CC	-	XC9236F2CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7CD	-	XC9236F2DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7CD	-	XC9236F2DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7CD	-	XC9236F2DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7CE	-	XC9236F2EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7CE	-	XC9236F2EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7CE	-	XC9236F2ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7CF	-	XC9236F2FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7CF	-	XC9236F2FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7CF	-	XC9236F2FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7CH	-	XC9236F2HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7CH	-	XC9236F2HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7CH	-	XC9236F2HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7CK	-	XC9236F2KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7CK	-	XC9236F2KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7CK	-	XC9236F2KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7CL	-	XC9236F2LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7CL	-	XC9236F2LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7CL	-	XC9236F2LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7CM	-	XC9236F2MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7CM	-	XC9236F2MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7CM	-	XC9236F2MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7D	-	RP103K181B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7D	-	RP111L091B	LVR-IC	LDO, 0.9V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7D	-	RP200K111D	LVR-IC	LDO, 1.1V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7D	-	RP202K111B	LVR-IC	LDO, 1.1V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7D	-	XC6217D14A7R-G	LVR-IC	LDO, 1.45V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7D	-	XC6223H2319R-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7D0	-	XC9236F30C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7D0	-	XC9236F30C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7D0	-	XC9236F30CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7D1	-	XC9236F31C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7D1	-	XC9236F31C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7D1	-	XC9236F31CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7D2	-	XC9236F32C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7D2	-	XC9236F32C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7D2	-	XC9236F32CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7D3	-	XC9236F33C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7D3	-	XC9236F33C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7D3	-	XC9236F33CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7D316	-	XC6105D316ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D317	-	XC6105D317ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D318	-	XC6105D318ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D319	-	XC6105D319ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D320	-	XC6105D320ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D321	-	XC6105D321ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D322	-	XC6105D322ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D323	-	XC6105D323ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D324	-	XC6105D324ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D325	-	XC6105D325ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D326	-	XC6105D326ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D327	-	XC6105D327ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D328	-	XC6105D328ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D329	-	XC6105D329ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D330	-	XC6105D330ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7D331	-	XC6105D331ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D332	-	XC6105D332ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D333	-	XC6105D333ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D334	-	XC6105D334ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D335	-	XC6105D335ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D336	-	XC6105D336ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D337	-	XC6105D337ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D338	-	XC6105D338ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D339	-	XC6105D339ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D340	-	XC6105D340ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D341	-	XC6105D341ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D342	-	XC6105D342ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D343	-	XC6105D343ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D344	-	XC6105D344ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D345	-	XC6105D345ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D346	-	XC6105D346ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D347	-	XC6105D347ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D348	-	XC6105D348ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D349	-	XC6105D349ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D350	-	XC6105D350ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D4	-	XC9236F34C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7D4	-	XC9236F34C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7D4	-	XC9236F34CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7D416	-	XC6105D416ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D417	-	XC6105D417ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D418	-	XC6105D418ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D419	-	XC6105D419ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D420	-	XC6105D420ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D421	-	XC6105D421ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D422	-	XC6105D422ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D423	-	XC6105D423ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D424	-	XC6105D424ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D425	-	XC6105D425ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D426	-	XC6105D426ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D427	-	XC6105D427ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D428	-	XC6105D428ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D429	-	XC6105D429ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D430	-	XC6105D430ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D431	-	XC6105D431ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D432	-	XC6105D432ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D433	-	XC6105D433ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D434	-	XC6105D434ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D435	-	XC6105D435ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D436	-	XC6105D436ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D437	-	XC6105D437ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D438	-	XC6105D438ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D439	-	XC6105D439ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D440	-	XC6105D440ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D441	-	XC6105D441ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D442	-	XC6105D442ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D443	-	XC6105D443ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D444	-	XC6105D444ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D445	-	XC6105D445ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D446	-	XC6105D446ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D447	-	XC6105D447ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D448	-	XC6105D448ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D449	-	XC6105D449ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D450	-	XC6105D450ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D5	-	XC9236F35C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7D5	-	XC9236F35C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7D5	-	XC9236F35CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7D516	-	XC6105D516ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D517	-	XC6105D517ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D518	-	XC6105D518ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D519	-	XC6105D519ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D520	-	XC6105D520ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D521	-	XC6105D521ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D522	-	XC6105D522ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D523	-	XC6105D523ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D524	-	XC6105D524ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7D525	-	XC6105D525ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D526	-	XC6105D526ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D527	-	XC6105D527ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D528	-	XC6105D528ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D529	-	XC6105D529ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D530	-	XC6105D530ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D531	-	XC6105D531ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D532	-	XC6105D532ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D533	-	XC6105D533ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D534	-	XC6105D534ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D535	-	XC6105D535ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D536	-	XC6105D536ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D537	-	XC6105D537ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D538	-	XC6105D538ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D539	-	XC6105D539ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D540	-	XC6105D540ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D541	-	XC6105D541ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D542	-	XC6105D542ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D543	-	XC6105D543ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D544	-	XC6105D544ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D545	-	XC6105D545ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D546	-	XC6105D546ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D547	-	XC6105D547ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D548	-	XC6105D548ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D549	-	XC6105D549ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D550	-	XC6105D550ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D6	-	XC9236F36C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7D6	-	XC9236F36C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7D6	-	XC9236F36CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7D616	-	XC6105D616ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D617	-	XC6105D617ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D618	-	XC6105D618ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D619	-	XC6105D619ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D620	-	XC6105D620ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D621	-	XC6105D621ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D622	-	XC6105D622ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D623	-	XC6105D623ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D624	-	XC6105D624ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D625	-	XC6105D625ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D626	-	XC6105D626ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D627	-	XC6105D627ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D628	-	XC6105D628ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D629	-	XC6105D629ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D630	-	XC6105D630ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D631	-	XC6105D631ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D632	-	XC6105D632ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D633	-	XC6105D633ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D634	-	XC6105D634ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D635	-	XC6105D635ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D636	-	XC6105D636ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D637	-	XC6105D637ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D638	-	XC6105D638ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D639	-	XC6105D639ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D640	-	XC6105D640ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D641	-	XC6105D641ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D642	-	XC6105D642ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D643	-	XC6105D643ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D644	-	XC6105D644ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D645	-	XC6105D645ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D646	-	XC6105D646ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D647	-	XC6105D647ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D648	-	XC6105D648ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D649	-	XC6105D649ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D650	-	XC6105D650ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
7D7	-	XC9236F37C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7D7	-	XC9236F37C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7D7	-	XC9236F37CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7D8	-	XC9236F38C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7D8	-	XC9236F38C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7D8	-	XC9236F38CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7D9	-	XC9236F39C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7D9	-	XC9236F39C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7D9	-	XC9236F39CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7DA	-	XC9236F3AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7DA	-	XC9236F3AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7DA	-	XC9236F3ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7DB	-	XC9236F3BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7DB	-	XC9236F3BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7DB	-	XC9236F3BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7DC	-	XC9236F3CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7DC	-	XC9236F3CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7DC	-	XC9236F3CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7DD	-	XC9236F3DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7DD	-	XC9236F3DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7DD	-	XC9236F3DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7DE	-	XC9236F3EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7DE	-	XC9236F3EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7DE	-	XC9236F3ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7DF	-	XC9236F3FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7DF	-	XC9236F3FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7DF	-	XC9236F3FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7DH	-	XC9236F3HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7DH	-	XC9236F3HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7DH	-	XC9236F3HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7DK	-	XC9236F3KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7DK	-	XC9236F3KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7DK	-	XC9236F3KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7DL	-	XC9236F3LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7DL	-	XC9236F3LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7DL	-	XC9236F3LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7DM	-	XC9236F3MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7DM	-	XC9236F3MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7DM	-	XC9236F3MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7E	-	RP103K181B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7E	-	RP111L101B	LVR-IC	LDO, 1.0V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7E	-	RP200K121D	LVR-IC	LDO, 1.2V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7E	-	RP202K121B	LVR-IC	LDO, 1.2V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7E	-	XC6217D15A7R-G	LVR-IC	LDO, 1.55V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7E	-	XC6223H2419R-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7E0	-	XC9236F40C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7E0	-	XC9236F40C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7E0	-	XC9236F40CER-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7E416	-	XC6105E416ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E417	-	XC6105E417ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E418	-	XC6105E418ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E419	-	XC6105E419ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E420	-	XC6105E420ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E421	-	XC6105E421ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E422	-	XC6105E422ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E423	-	XC6105E423ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E424	-	XC6105E424ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E425	-	XC6105E425ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E426	-	XC6105E426ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E427	-	XC6105E427ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E428	-	XC6105E428ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E429	-	XC6105E429ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E430	-	XC6105E430ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E431	-	XC6105E431ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E432	-	XC6105E432ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E433	-	XC6105E433ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E434	-	XC6105E434ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E435	-	XC6105E435ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E436	-	XC6105E436ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E437	-	XC6105E437ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E438	-	XC6105E438ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E439	-	XC6105E439ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E440	-	XC6105E440ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E441	-	XC6105E441ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E442	-	XC6105E442ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E443	-	XC6105E443ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7E444	-	XC6105E444ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E445	-	XC6105E445ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E446	-	XC6105E446ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E447	-	XC6105E447ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E448	-	XC6105E448ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E449	-	XC6105E449ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E450	-	XC6105E450ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E516	-	XC6105E516ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E517	-	XC6105E517ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E518	-	XC6105E518ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E519	-	XC6105E519ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E520	-	XC6105E520ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E521	-	XC6105E521ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E522	-	XC6105E522ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E523	-	XC6105E523ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E524	-	XC6105E524ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E525	-	XC6105E525ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E526	-	XC6105E526ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E527	-	XC6105E527ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E528	-	XC6105E528ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E529	-	XC6105E529ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E530	-	XC6105E530ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E531	-	XC6105E531ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E532	-	XC6105E532ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E533	-	XC6105E533ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E534	-	XC6105E534ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E535	-	XC6105E535ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E536	-	XC6105E536ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E537	-	XC6105E537ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E538	-	XC6105E538ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E539	-	XC6105E539ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E540	-	XC6105E540ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E541	-	XC6105E541ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E542	-	XC6105E542ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E543	-	XC6105E543ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E544	-	XC6105E544ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E545	-	XC6105E545ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E546	-	XC6105E546ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E547	-	XC6105E547ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E548	-	XC6105E548ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E549	-	XC6105E549ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E550	-	XC6105E550ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E616	-	XC6105E616ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E617	-	XC6105E617ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E618	-	XC6105E618ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E619	-	XC6105E619ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E620	-	XC6105E620ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E621	-	XC6105E621ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E622	-	XC6105E622ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E623	-	XC6105E623ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E624	-	XC6105E624ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E625	-	XC6105E625ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E626	-	XC6105E626ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E627	-	XC6105E627ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E628	-	XC6105E628ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E629	-	XC6105E629ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E630	-	XC6105E630ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E631	-	XC6105E631ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E632	-	XC6105E632ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E633	-	XC6105E633ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E634	-	XC6105E634ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E635	-	XC6105E635ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E636	-	XC6105E636ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E637	-	XC6105E637ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E638	-	XC6105E638ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E639	-	XC6105E639ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E640	-	XC6105E640ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E641	-	XC6105E641ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E642	-	XC6105E642ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E643	-	XC6105E643ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7E644	-	XC6105E644ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E645	-	XC6105E645ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E646	-	XC6105E646ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E647	-	XC6105E647ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E648	-	XC6105E648ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E649	-	XC6105E649ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7E650	-	XC6105E650ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
7F	-	RP103K191B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7F	-	RP111L111B	LVR-IC	LDO, 1.1V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7F	-	RP200K131D	LVR-IC	LDO, 1.3V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7F	-	RP202K131B	LVR-IC	LDO, 1.3V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7F	-	XC6217D16A7R-G	LVR-IC	LDO, 1.65V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7F	-	XC6223H2519R-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7F516	-	XC6105F516ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F517	-	XC6105F517ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F518	-	XC6105F518ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F519	-	XC6105F519ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F520	-	XC6105F520ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F521	-	XC6105F521ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F522	-	XC6105F522ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F523	-	XC6105F523ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F524	-	XC6105F524ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F525	-	XC6105F525ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F526	-	XC6105F526ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F527	-	XC6105F527ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F528	-	XC6105F528ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F529	-	XC6105F529ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F530	-	XC6105F530ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F531	-	XC6105F531ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F532	-	XC6105F532ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F533	-	XC6105F533ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F534	-	XC6105F534ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F535	-	XC6105F535ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F536	-	XC6105F536ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F537	-	XC6105F537ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F538	-	XC6105F538ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F539	-	XC6105F539ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F540	-	XC6105F540ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F541	-	XC6105F541ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F542	-	XC6105F542ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F543	-	XC6105F543ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F544	-	XC6105F544ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F545	-	XC6105F545ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F546	-	XC6105F546ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F547	-	XC6105F547ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F548	-	XC6105F548ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F549	-	XC6105F549ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F550	-	XC6105F550ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F616	-	XC6105F616ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F617	-	XC6105F617ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F618	-	XC6105F618ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F619	-	XC6105F619ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F620	-	XC6105F620ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F621	-	XC6105F621ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F622	-	XC6105F622ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F623	-	XC6105F623ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F624	-	XC6105F624ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F625	-	XC6105F625ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F626	-	XC6105F626ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F627	-	XC6105F627ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F628	-	XC6105F628ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F629	-	XC6105F629ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F630	-	XC6105F630ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F631	-	XC6105F631ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F632	-	XC6105F632ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F633	-	XC6105F633ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F634	-	XC6105F634ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F635	-	XC6105F635ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F636	-	XC6105F636ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F637	-	XC6105F637ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7F638	-	XC6105F638ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F639	-	XC6105F639ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F640	-	XC6105F640ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F641	-	XC6105F641ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F642	-	XC6105F642ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F643	-	XC6105F643ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F644	-	XC6105F644ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F645	-	XC6105F645ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F646	-	XC6105F646ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F647	-	XC6105F647ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F648	-	XC6105F648ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F649	-	XC6105F649ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F650	-	XC6105F650ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
7F8	-	XC9236F08D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7F8	-	XC9236F08D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7F8	-	XC9236F08DER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7F9	-	XC9236F09D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7F9	-	XC9236F09D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7F9	-	XC9236F09DER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7FL	-	XC9236F0LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7FL	-	XC9236F0LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7FL	-	XC9236F0LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7FM	-	XC9236F0MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7FM	-	XC9236F0MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7FM	-	XC9236F0MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7G	-	RP103K201B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7G	-	RP111L121B	LVR-IC	LDO, 1.2V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7G	-	RP200K141D	LVR-IC	LDO, 1.4V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7G	-	RP202K141B	LVR-IC	LDO, 1.4V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7H	-	RP103K251B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7H	-	RP111L121B5	LVR-IC	LDO, 1.25V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7H	-	RP200K151D	LVR-IC	LDO, 1.5V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7H	-	RP202K151B	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7H	-	XC6217D17A7R-G	LVR-IC	LDO, 1.75V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7H	-	XC6223H2619R-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7H0	-	XC9236F10D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7H0	-	XC9236F10D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7H0	-	XC9236F10DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7H1	-	XC9236F11D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7H1	-	XC9236F11D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7H1	-	XC9236F11DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7H2	-	XC9236F12D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7H2	-	XC9236F12D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7H2	-	XC9236F12DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7H3	-	XC9236F13D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7H3	-	XC9236F13D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7H3	-	XC9236F13DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7H4	-	XC9236F14D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7H4	-	XC9236F14D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7H4	-	XC9236F14DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7H5	-	XC9236F15D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7H5	-	XC9236F15D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7H5	-	XC9236F15DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7H6	-	XC9236F16D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7H6	-	XC9236F16D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7H6	-	XC9236F16DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7H616	-	XC6105H616ER	Vdet-IC	1.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H617	-	XC6105H617ER	Vdet-IC	1.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H618	-	XC6105H618ER	Vdet-IC	1.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H619	-	XC6105H619ER	Vdet-IC	1.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H620	-	XC6105H620ER	Vdet-IC	2.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H621	-	XC6105H621ER	Vdet-IC	2.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H622	-	XC6105H622ER	Vdet-IC	2.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H623	-	XC6105H623ER	Vdet-IC	2.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H624	-	XC6105H624ER	Vdet-IC	2.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H625	-	XC6105H625ER	Vdet-IC	2.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H626	-	XC6105H626ER	Vdet-IC	2.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H627	-	XC6105H627ER	Vdet-IC	2.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H628	-	XC6105H628ER	Vdet-IC	2.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H629	-	XC6105H629ER	Vdet-IC	2.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7H630	-	XC6105H630ER	Vdet-IC	3.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H631	-	XC6105H631ER	Vdet-IC	3.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H632	-	XC6105H632ER	Vdet-IC	3.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H633	-	XC6105H633ER	Vdet-IC	3.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H634	-	XC6105H634ER	Vdet-IC	3.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H635	-	XC6105H635ER	Vdet-IC	3.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H636	-	XC6105H636ER	Vdet-IC	3.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H637	-	XC6105H637ER	Vdet-IC	3.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H638	-	XC6105H638ER	Vdet-IC	3.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H639	-	XC6105H639ER	Vdet-IC	3.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H640	-	XC6105H640ER	Vdet-IC	4.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H641	-	XC6105H641ER	Vdet-IC	4.1V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H642	-	XC6105H642ER	Vdet-IC	4.2V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H643	-	XC6105H643ER	Vdet-IC	4.3V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H644	-	XC6105H644ER	Vdet-IC	4.4V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H645	-	XC6105H645ER	Vdet-IC	4.5V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H646	-	XC6105H646ER	Vdet-IC	4.6V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H647	-	XC6105H647ER	Vdet-IC	4.7V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H648	-	XC6105H648ER	Vdet-IC	4.8V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H649	-	XC6105H649ER	Vdet-IC	4.9V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H650	-	XC6105H650ER	Vdet-IC	5.0V±2%, Hst, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
7H7	-	XC9236F17D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7H7	-	XC9236F17D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7H7	-	XC9236F17DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7H8	-	XC9236F18D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7H8	-	XC9236F18D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7H8	-	XC9236F18DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7H9	-	XC9236F19D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7H9	-	XC9236F19D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7H9	-	XC9236F19DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7HA	-	XC9236F1AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7HA	-	XC9236F1AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7HA	-	XC9236F1ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7HB	-	XC9236F1BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7HB	-	XC9236F1BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7HB	-	XC9236F1BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7HC	-	XC9236F1CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7HC	-	XC9236F1CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7HC	-	XC9236F1CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7HD	-	XC9236F1DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7HD	-	XC9236F1DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7HD	-	XC9236F1DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7HE	-	XC9236F1ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7HE	-	XC9236F1ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7HE	-	XC9236F1EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7HF	-	XC9236F1FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7HF	-	XC9236F1FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7HF	-	XC9236F1FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7HH	-	XC9236F1HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7HH	-	XC9236F1HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7HH	-	XC9236F1HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7HK	-	XC9236F1KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7HK	-	XC9236F1KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7HK	-	XC9236F1KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7HL	-	XC9236F1LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7HL	-	XC9236F1LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7HL	-	XC9236F1LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7HM	-	XC9236F1MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7HM	-	XC9236F1MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7HM	-	XC9236F1MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7J	-	RP103K261B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7J	-	RP111L131B	LVR-IC	LDO, 1.3V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7J	-	RP200K161D	LVR-IC	LDO, 1.6V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7J	-	RP202K161B	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7K	-	RP103K271B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7K	-	RP111L141B	LVR-IC	LDO, 1.4V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7K	-	RP200K171D	LVR-IC	LDO, 1.7V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7K	-	RP202K171B	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7K	-	XC6217D18A7R-G	LVR-IC	LDO, 1.85V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7K	-	XC6223H2719R-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7K0	-	XC9236F20D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7K0	-	XC9236F20D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7K0	-	XC9236F20DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7K1	-	XC9236F21D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7K1	-	XC9236F21D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7K1	-	XC9236F21DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7K2	-	XC9236F22D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7K2	-	XC9236F22D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7K2	-	XC9236F22DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7K3	-	XC9236F23D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7K3	-	XC9236F23D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7K3	-	XC9236F23DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7K4	-	XC9236F24D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7K4	-	XC9236F24D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7K4	-	XC9236F24DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7K5	-	XC9236F25D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7K5	-	XC9236F25D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7K5	-	XC9236F25DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7K6	-	XC9236F26D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7K6	-	XC9236F26D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7K6	-	XC9236F26DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7K7	-	XC9236F27D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7K7	-	XC9236F27D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7K7	-	XC9236F27DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7K8	-	XC9236F28D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7K8	-	XC9236F28D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7K8	-	XC9236F28DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7K9	-	XC9236F29D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7K9	-	XC9236F29D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7K9	-	XC9236F29DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7KA	-	XC9236F2AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7KA	-	XC9236F2AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7KA	-	XC9236F2ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7KB	-	XC9236F2BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7KB	-	XC9236F2BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7KB	-	XC9236F2BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7KC	-	XC9236F2CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7KC	-	XC9236F2CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7KC	-	XC9236F2CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7KD	-	XC9236F2DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7KD	-	XC9236F2DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7KD	-	XC9236F2DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7KE	-	XC9236F2ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7KE	-	XC9236F2ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7KE	-	XC9236F2EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7KF	-	XC9236F2FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7KF	-	XC9236F2FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7KF	-	XC9236F2FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7KH	-	XC9236F2HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7KH	-	XC9236F2HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7KH	-	XC9236F2HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7KK	-	XC9236F2KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7KK	-	XC9236F2KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7KK	-	XC9236F2KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7KL	-	XC9236F2LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7KL	-	XC9236F2LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7KL	-	XC9236F2LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7KM	-	XC9236F2MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7KM	-	XC9236F2MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7KM	-	XC9236F2MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7L	-	RP103K281B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7L	-	RP111L151B	LVR-IC	LDO, 1.5V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7L	-	RP200K181D	LVR-IC	LDO, 1.8V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7L	-	RP202K181B	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7L	-	XC6217D19A7R-G	LVR-IC	LDO, 1.95V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7L	-	XC6223H2819R-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7L0	-	XC9236F30D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7L0	-	XC9236F30D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7L0	-	XC9236F30DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7L1	-	XC9236F31D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7L1	-	XC9236F31D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7L1	-	XC9236F31DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7L2	-	XC9236F32D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7L2	-	XC9236F32D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7L2	-	XC9236F32DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7L3	-	XC9236F33D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7L3	-	XC9236F33D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7L3	-	XC9236F33DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7L4	-	XC9236F34D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7L4	-	XC9236F34D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7L4	-	XC9236F34DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7L5	-	XC9236F35D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7L5	-	XC9236F35D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7L5	-	XC9236F35DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7L6	-	XC9236F36D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7L6	-	XC9236F36D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7L6	-	XC9236F36DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7L7	-	XC9236F37D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7L7	-	XC9236F37D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7L7	-	XC9236F37DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7L8	-	XC9236F38D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7L8	-	XC9236F38D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7L8	-	XC9236F38DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7L9	-	XC9236F39D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7L9	-	XC9236F39D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7L9	-	XC9236F39DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7LA	-	XC9236F3AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7LA	-	XC9236F3AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7LA	-	XC9236F3ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7LB	-	XC9236F3BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7LB	-	XC9236F3BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7LB	-	XC9236F3BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7LC	-	XC9236F3CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7LC	-	XC9236F3CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7LC	-	XC9236F3CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7LD	-	XC9236F3DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7LD	-	XC9236F3DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7LD	-	XC9236F3DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7LE	-	XC9236F3ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7LE	-	XC9236F3ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7LE	-	XC9236F3EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7LF	-	XC9236F3FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7LF	-	XC9236F3FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7LF	-	XC9236F3FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7LH	-	XC9236F3HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7LH	-	XC9236F3HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7LH	-	XC9236F3HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7LK	-	XC9236F3KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7LK	-	XC9236F3KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7LK	-	XC9236F3KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7LL	-	XC9236F3LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7LL	-	XC9236F3LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7LL	-	XC9236F3LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7LM	-	XC9236F3MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7LM	-	XC9236F3MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7LM	-	XC9236F3MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7M	-	RP103K281B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7M	-	RP111L161B	LVR-IC	LDO, 1.6V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7M	-	RP200K191D	LVR-IC	LDO, 1.9V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7M	-	RP202K191B	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7M	-	XC6217D20A7R-G	LVR-IC	LDO, 2.05V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7M	-	XC6223H2919R-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7M0	-	XC9236F40D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
7M0	-	XC9236F40D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
7M0	-	XC9236F40DER-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
7N	-	RP103K291B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7N	-	RP111L171B	LVR-IC	LDO, 1.7V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7N	-	RP200K201D	LVR-IC	LDO, 2.0V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7N	-	RP202K201B	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7N	-	XC6217D21A7R-G	LVR-IC	LDO, 2.15V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
7N	-	XC6223H3019R-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7P	-	RP103K301B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7P	-	RP111L181B	LVR-IC	LDO, 1.8V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7P	-	RP200K211D	LVR-IC	LDO, 2.1V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7P	-	RP202K211B	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7P	-	XC6217D22A7R-G	LVR-IC	LDO, 2.25V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7P	-	XC6223H3119R-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7Q	-	RP103K311B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7Q	-	RP111L181B5	LVR-IC	LDO, 1.85V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7Q	-	RP200K221D	LVR-IC	LDO, 2.2V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7Q	-	RP202K221B	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7R	-	RP103K331B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7R	-	RP111L191B	LVR-IC	LDO, 1.9V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7R	-	RP200K231D	LVR-IC	LDO, 2.3V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7R	-	RP202K231B	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7R	-	XC6217D23A7R-G	LVR-IC	LDO, 2.35V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7R	-	XC6223H3219R-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7S	-	RP111L201B	LVR-IC	LDO, 2.0V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7S	-	RP200K241D	LVR-IC	LDO, 2.4V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7S	-	RP202K241B	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7S	-	XC6217D24A7R-G	LVR-IC	LDO, 2.45V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7S	-	XC6223H3319R-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7T	-	RP103K211B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7T	-	RP111L211B	LVR-IC	LDO, 2.1V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7T	-	RP200K251D	LVR-IC	LDO, 2.5V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7T	-	RP202K251B	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7T	-	XC6217D25A7R-G	LVR-IC	LDO, 2.55V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7T	-	XC6223H3419R-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7U	-	RP103K321B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7U	-	RP111L221B	LVR-IC	LDO, 2.2V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7U	-	RP200K261D	LVR-IC	LDO, 2.6V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7U	-	RP202K261B	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7U	-	XC6217D26A7R-G	LVR-IC	LDO, 2.65V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7U	-	XC6223H3519R-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7V	-	RP103K291B5	LVR-IC	LDO, 2.95V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7V	-	RP111L231B	LVR-IC	LDO, 2.3V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7V	-	RP200K271D	LVR-IC	LDO, 2.7V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7V	-	RP202K271B	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7V	-	XC6217D27A7R-G	LVR-IC	LDO, 2.75V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7V	-	XC6223H3619R-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7W	-	RP103K221B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7W	-	RP111L241B	LVR-IC	LDO, 2.4V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7W	-	RP200K281D	LVR-IC	LDO, 2.8V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7W	-	RP202K281B	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7X	-	RP103K161B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7X	-	RP111L251B	LVR-IC	LDO, 2.5V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7X	-	RP200K291D	LVR-IC	LDO, 2.9V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7X	-	RP202K291B	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7X	-	XC6217D28A7R-G	LVR-IC	LDO, 2.85V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7X	-	XC6223H3719R-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7Y	-	RP103K141B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7Y	-	RP111L261B	LVR-IC	LDO, 2.6V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7Y	-	RP200K301D	LVR-IC	LDO, 3.0V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7Y	-	RP202K301B	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7Y	-	XC6217D29A7R-G	LVR-IC	LDO, 2.95V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7Y	-	XC6223H3819R-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
7Z	-	RP103K171B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7Z	-	RP111L271B	LVR-IC	LDO, 2.7V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
7Z	-	RP200K311D	LVR-IC	LDO, 3.1V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
7Z	-	RP202K311B	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
7Z	-	XC6217D30A7R-G	LVR-IC	LDO, 3.05V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
7Z	-	XC6223H3919R-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
80	-	RP110L221D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
80	-	XC6217D31A7R-G	LVR-IC	LDO, 3.15V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
8010	-	AW8010CS	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/8Ω), shutdown	BGA-9	39	AFP45	9a	Awn
808	-	XCL208A083DR	DC-DC-IC	PWM step-down, 3MHz, 0.8V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
809	-	XCL208A093DR	DC-DC-IC	PWM step-down, 3MHz, 0.9V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
80L	-	XCL208A0L3DR	DC-DC-IC	PWM step-down, 3MHz, 0.85V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
80M	-	XCL208A0M3DR	DC-DC-IC	PWM step-down, 3MHz, 0.95V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
81	-	RP110L231D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
81	-	XC6217D32A7R-G	LVR-IC	LDO, 3.25V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
810	-	XCL208A103DR	DC-DC-IC	PWM step-down, 3MHz, 1.0V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
811	-	XCL208A113DR	DC-DC-IC	PWM step-down, 3MHz, 1.1V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
8110	-	AW8110CS	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/8Ω), shutdown	BGA-9	39	AFP45	9a	Awn
8115D	-	CS8115D	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3.3W(5V/8Ω), shutdown	DFN-8 3x3	65	-	9a	Cme
8115T	-	CS8115T	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3.3W(5V/8Ω), shutdown	DFN-8 2x2	65	-	9a	Cme
812	-	XCL208A123DR	DC-DC-IC	PWM step-down, 3MHz, 1.2V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
8120D	-	CS8120D	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3.3W(5V/8Ω), shutdown	DFN-8 3x3	65	AFP24	9a	Cme
8120T	-	CS8120T	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3.3W(5V/8Ω), shutdown	DFN-8 2x2	65	AFP24	9a	Cme
813	-	XCL208A133DR	DC-DC-IC	PWM step-down, 3MHz, 1.3V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
814	-	XCL208A143DR	DC-DC-IC	PWM step-down, 3MHz, 1.4V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
815	-	MIC5305-1.5BML	LVR-IC	LDO, LN, +CE, 1.5V±1%, 150mA	MLF-6	56ub	VR7	9a	Mcr
815	-	XCL208A153DR	DC-DC-IC	PWM step-down, 3MHz, 1.5V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
815	mb	MIC5305-1.5YML	LVR-IC	LDO, LN, +CE, 1.5V±1%, 150mA, Pb-free	MLF-6	56ub	VR7	9a	Mcr
816	-	XCL208A163DR	DC-DC-IC	PWM step-down, 3MHz, 1.6V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
817	-	XCL208A173DR	DC-DC-IC	PWM step-down, 3MHz, 1.7V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
818	-	MIC5305-1.8BML	LVR-IC	LDO, LN, +CE, 1.8V±1%, 150mA	MLF-6	56ub	VR7	9a	Mcr
818	-	XCL208A183DR	DC-DC-IC	PWM step-down, 3MHz, 1.8V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
818	mb	MIC5305-1.8YML	LVR-IC	LDO, LN, +CE, 1.8V±1%, 150mA, Pb-free	MLF-6	56ub	VR7	9a	Mcr
819	-	XCL208A193DR	DC-DC-IC	PWM step-down, 3MHz, 1.9V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
81A	-	XCL208A1A3DR	DC-DC-IC	PWM step-down, 3MHz, 1.05V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
81B	-	XCL208A1B3DR	DC-DC-IC	PWM step-down, 3MHz, 1.15V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
81C	-	XCL208A1C3DR	DC-DC-IC	PWM step-down, 3MHz, 1.25V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
81D	-	XCL208A1D3DR	DC-DC-IC	PWM step-down, 3MHz, 1.35V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
81E	-	XCL208A1E3DR	DC-DC-IC	PWM step-down, 3MHz, 1.45V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
81F	-	XCL208A1F3DR	DC-DC-IC	PWM step-down, 3MHz, 1.55V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
81H	-	XCL208A1H3DR	DC-DC-IC	PWM step-down, 3MHz, 1.65V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
81K	-	XC6701B18ER	LVR-IC	1.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
81K	-	XCL208A1K3DR	DC-DC-IC	PWM step-down, 3MHz, 1.75V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
81L	-	XC6701B19ER	LVR-IC	1.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
81L	-	XCL208A1L3DR	DC-DC-IC	PWM step-down, 3MHz, 1.85V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
81M	-	XC6701B20ER	LVR-IC	2.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
81M	-	XCL208A1M3DR	DC-DC-IC	PWM step-down, 3MHz, 1.95V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
81N	-	XC6701B21ER	LVR-IC	2.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
81P	-	XC6701B22ER	LVR-IC	2.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
81R	-	XC6701B23ER	LVR-IC	2.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
81S	-	XC6701B24ER	LVR-IC	2.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
81T	-	XC6701B25ER	LVR-IC	2.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
81U	-	XC6701B26ER	LVR-IC	2.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
81V	-	XC6701B27ER	LVR-IC	2.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
81X	-	XC6701B28ER	LVR-IC	2.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
81Y	-	XC6701B29ER	LVR-IC	2.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
81Z	-	XC6701B30ER	LVR-IC	3.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82	-	RP110L241D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
82	-	XC6217D33A7R-G	LVR-IC	LDO, 3.35V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
82	-	XC6223A12B9R-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
820	-	XC6701B31ER	LVR-IC	3.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
820	-	XCL208A203DR	DC-DC-IC	PWM step-down, 3MHz, 2.0V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
820	mb	MIC5305-2.0YML	LVR-IC	LDO, LN, +CE, 1.8V±1%, 150mA, Pb-free	MLF-6	56ub	VR7	9a	Mcr
8205D	-	CS8205D	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x3.1W(5V/8Ω), mute, shutdown	QFN-16	38	-	9a	Cme
821	-	XC6701B32ER	LVR-IC	3.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
821	-	XCL208A213DR	DC-DC-IC	PWM step-down, 3MHz, 2.1V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
822	-	XC6701B33ER	LVR-IC	3.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
822	-	XCL208A223DR	DC-DC-IC	PWM step-down, 3MHz, 2.2V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
823	-	XC6701B34ER	LVR-IC	3.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
823	-	XCL208A233DR	DC-DC-IC	PWM step-down, 3MHz, 2.3V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
824	-	XC6701B35ER	LVR-IC	3.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
824	-	XCL208A243DR	DC-DC-IC	PWM step-down, 3MHz, 2.4V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
825	-	MIC5305-2.5BML	LVR-IC	LDO, LN, +CE, 2.5V±1%, 150mA	MLF-6	56ub	VR7	9a	Mcr
825	-	XC6701B36ER	LVR-IC	3.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
825	-	XCL208A253DR	DC-DC-IC	PWM step-down, 3MHz, 2.5V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
825	mb	MIC5305-2.5YML	LVR-IC	LDO, LN, +CE, 2.5V±1%, 150mA, Pb-free	MLF-6	56ub	VR7	9a	Mcr
826	-	MIC5305-2.6BML	LVR-IC	LDO, LN, +CE, 2.6V±1%, 150mA	MLF-6	56ub	VR7	9a	Mcr
826	-	XC6701B37ER	LVR-IC	3.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
826	-	XCL208A263DR	DC-DC-IC	PWM step-down, 3MHz, 2.6V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
826	mb	MIC5305-2.6YML	LVR-IC	LDO, LN, +CE, 2.6V±1%, 150mA, Pb-free	MLF-6	56ub	VR7	9a	Mcr
827	-	MIC5305-2.7BML	LVR-IC	LDO, LN, +CE, 2.7V±1%, 150mA	MLF-6	56ub	VR7	9a	Mcr
827	-	XC6701B38ER	LVR-IC	3.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
827	-	XCL208A273DR	DC-DC-IC	PWM step-down, 3MHz, 2.7V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
827	mb	MIC5305-2.7YML	LVR-IC	LDO, LN, +CE, 2.7V±1%, 150mA, Pb-free	MLF-6	56ub	VR7	9a	Mcr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
828	-	MIC5305-2.8BML	LVR-IC	LDO, LN, +CE, 2.8V±1%, 150mA	MLF-6	56ub	VR7	9a	Mcr
828	-	MIC5305-2.8YMT	LVR-IC	LDO, LN, +CE, 2.8V±1%, 150mA, Pb-free	MLF-6	56ub	VR7	9x	Mcr
828	-	XC6701B39ER	LVR-IC	3.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
828	-	XCL208A283DR	DC-DC-IC	PWM step-down, 3MHz, 2.8V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
828	mb	MIC5305-2.8YML	LVR-IC	LDO, LN, +CE, 2.8V±1%, 150mA, Pb-free	MLF-6	56ub	VR7	9a	Mcr
829	-	MIC5305-2.9BML	LVR-IC	LDO, LN, +CE, 2.9V±1%, 150mA	MLF-6	56ub	VR7	9a	Mcr
829	-	XC6701B40ER	LVR-IC	4.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
829	-	XCL208A293DR	DC-DC-IC	PWM step-down, 3MHz, 2.9V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
829	mb	MIC5305-2.9YML	LVR-IC	LDO, LN, +CE, 2.9V±1%, 150mA, Pb-free	MLF-6	56ub	VR7	9a	Mcr
82A	-	XC6701B41ER	LVR-IC	4.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82A	-	XCL208A2A3DR	DC-DC-IC	PWM step-down, 3MHz, 2.05V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
82B	-	XC6701B42ER	LVR-IC	4.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82B	-	XCL208A2B3DR	DC-DC-IC	PWM step-down, 3MHz, 2.15V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
82C	-	XC6701B43ER	LVR-IC	4.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82C	-	XCL208A2C3DR	DC-DC-IC	PWM step-down, 3MHz, 2.25V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
82D	-	XC6701B44ER	LVR-IC	4.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82D	-	XCL208A2D3DR	DC-DC-IC	PWM step-down, 3MHz, 2.35V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
82E	-	XC6701B45ER	LVR-IC	4.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82E	-	XCL208A2E3DR	DC-DC-IC	PWM step-down, 3MHz, 2.45V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
82F	-	XC6701B46ER	LVR-IC	4.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82F	-	XCL208A2F3DR	DC-DC-IC	PWM step-down, 3MHz, 2.55V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
82H	-	XC6701B47ER	LVR-IC	4.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82H	-	XCL208A2H3DR	DC-DC-IC	PWM step-down, 3MHz, 2.65V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
82J	-	MIC5305-2.85BML	LVR-IC	LDO, LN, +CE, 2.85V±1%, 150mA	MLF-6	56ub	VR7	9a	Mcr
82J	mb	MIC5305-2.85YML	LVR-IC	LDO, LN, +CE, 2.85V±1%, 150mA, Pb-free	MLF-6	56ub	VR7	9a	Mcr
82K	-	XC6701B48ER	LVR-IC	4.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82K	-	XCL208A2K3DR	DC-DC-IC	PWM step-down, 3MHz, 2.75V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
82L	-	XC6701B49ER	LVR-IC	4.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82L	-	XCL208A2L3DR	DC-DC-IC	PWM step-down, 3MHz, 2.85V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
82M	-	XC6701B50ER	LVR-IC	5.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82M	-	XCL208A2M3DR	DC-DC-IC	PWM step-down, 3MHz, 2.95V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
82N	-	XC6701B51ER	LVR-IC	5.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82P	-	XC6701B52ER	LVR-IC	5.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82R	-	XC6701B53ER	LVR-IC	5.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82S	-	XC6701B54ER	LVR-IC	5.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82T	-	XC6701B55ER	LVR-IC	5.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82U	-	XC6701B56ER	LVR-IC	5.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82V	-	XC6701B57ER	LVR-IC	5.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82X	-	XC6701B58ER	LVR-IC	5.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82Y	-	XC6701B59ER	LVR-IC	5.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
82Z	-	XC6701B60ER	LVR-IC	6.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83	-	RP110L251D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
83	-	XC6217D34A7R-G	LVR-IC	LDO, 3.45V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
83	-	XC6223A13B9R-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
830	-	MIC5305-3.0BML	LVR-IC	LDO, LN, +CE, 3V±1%, 150mA	MLF-6	56ub	VR7	9a	Mcr
830	-	XC6701B61ER	LVR-IC	6.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
830	-	XCL208A303DR	DC-DC-IC	PWM step-down, 3MHz, 3.0V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
830	mb	MIC5305-3.0YML	LVR-IC	LDO, LN, +CE, 3V±1%, 150mA, Pb-free	MLF-6	56ub	VR7	9a	Mcr
831	-	XC6701B62ER	LVR-IC	6.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
831	-	XCL208A313DR	DC-DC-IC	PWM step-down, 3MHz, 3.1V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
832	-	XC6701B63ER	LVR-IC	6.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
832	-	XCL208A323DR	DC-DC-IC	PWM step-down, 3MHz, 3.2V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
833	-	MIC5305-3.3BML	LVR-IC	LDO, LN, +CE, 3.3V±1%, 150mA	MLF-6	56ub	VR7	9a	Mcr
833	-	XC6701B64ER	LVR-IC	6.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
833	-	XCL208A333DR	DC-DC-IC	PWM step-down, 3MHz, 3.3V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
833	mb	MIC5305-3.3YML	LVR-IC	LDO, LN, +CE, 3.3V±1%, 150mA, Pb-free	MLF-6	56ub	VR7	9a	Mcr
834	-	XC6701B65ER	LVR-IC	6.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
834	-	XCL208A343DR	DC-DC-IC	PWM step-down, 3MHz, 3.4V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
835	-	XC6701B66ER	LVR-IC	6.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
835	-	XCL208A353DR	DC-DC-IC	PWM step-down, 3MHz, 3.5V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
836	-	XC6701B67ER	LVR-IC	6.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
836	-	XCL208A363DR	DC-DC-IC	PWM step-down, 3MHz, 3.6V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
837	-	XC6701B68ER	LVR-IC	6.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
837	-	XCL208A373DR	DC-DC-IC	PWM step-down, 3MHz, 3.7V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
838	-	XC6701B69ER	LVR-IC	6.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
838	-	XCL208A383DR	DC-DC-IC	PWM step-down, 3MHz, 3.8V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
839	-	XC6701B70ER	LVR-IC	7.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
839	-	XCL208A393DR	DC-DC-IC	PWM step-down, 3MHz, 3.9V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
83A	-	XC6701B71ER	LVR-IC	7.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83A	-	XCL208A3A3DR	DC-DC-IC	PWM step-down, 3MHz, 3.05V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
83B	-	XC6701B72ER	LVR-IC	7.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83B	-	XCL208A3B3DR	DC-DC-IC	PWM step-down, 3MHz, 3.15V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
83C	-	XC6701B73ER	LVR-IC	7.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83C	-	XCL208A3C3DR	DC-DC-IC	PWM step-down, 3MHz, 3.25V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
83D	-	XC6701B74ER	LVR-IC	7.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83D	-	XCL208A3D3DR	DC-DC-IC	PWM step-down, 3MHz, 3.35V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
83E	-	XC6701B75ER	LVR-IC	7.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83E	-	XCL208A3E3DR	DC-DC-IC	PWM step-down, 3MHz, 3.45V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
83F	-	XC6701B76ER	LVR-IC	7.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83F	-	XCL208A3F3DR	DC-DC-IC	PWM step-down, 3MHz, 3.55V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
83H	-	XC6701B77ER	LVR-IC	7.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83H	-	XCL208A3H3DR	DC-DC-IC	PWM step-down, 3MHz, 3.65V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
83K	-	XC6701B78ER	LVR-IC	7.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83K	-	XCL208A3K3DR	DC-DC-IC	PWM step-down, 3MHz, 3.75V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
83L	-	XC6701B79ER	LVR-IC	7.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83L	-	XCL208A3L3DR	DC-DC-IC	PWM step-down, 3MHz, 3.85V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
83M	-	XC6701B80ER	LVR-IC	8.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83M	-	XCL208A3M3DR	DC-DC-IC	PWM step-down, 3MHz, 3.95V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
83N	-	XC6701B81ER	LVR-IC	8.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83P	-	XC6701B82ER	LVR-IC	8.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83R	-	XC6701B83ER	LVR-IC	8.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83S	-	XC6701B84ER	LVR-IC	8.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83T	-	XC6701B85ER	LVR-IC	8.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83U	-	XC6701B86ER	LVR-IC	8.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83V	-	XC6701B87ER	LVR-IC	8.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83X	-	XC6701B88ER	LVR-IC	8.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83Y	-	XC6701B89ER	LVR-IC	8.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
83Z	-	XC6701B90ER	LVR-IC	9.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84	-	RP110L261D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
84	-	XC6217D35A7R-G	LVR-IC	LDO, 3.55V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
84	-	XC6223A14B9R-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
840	-	XC6701B91ER	LVR-IC	9.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
840	-	XCL208A403DR	DC-DC-IC	PWM step-down, 3MHz, 4.0V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
841	-	XC6701B92ER	LVR-IC	9.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8415	-	BD88415GUL	Lin-IC	AF PA, 2.5..5.5V, 2x60mW(3V/16Ω), shutdown	BGA-14	39	-	9g	Rhm
842	-	XC6701B93ER	LVR-IC	9.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
843	-	XC6701B94ER	LVR-IC	9.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
844	-	XC6701B95ER	LVR-IC	9.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
845	-	XC6701B96ER	LVR-IC	9.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
846	-	MIC5305-4.6YMT	LVR-IC	LDO, LN, +CE, 4.6V±1%, 150mA, Pb-free	MLF-6	56ub	VR7	9x	Mcr
846	-	XC6701B97ER	LVR-IC	9.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
847	-	XC6701B98ER	LVR-IC	9.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
848	-	XC6701B99ER	LVR-IC	9.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
849	-	XC6701BA0ER	LVR-IC	10.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84A	-	XC6701BA1ER	LVR-IC	10.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84B	-	XC6701BA2ER	LVR-IC	10.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84C	-	MIC5370-1.2/1.0YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/1.0V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
84C	-	XC6701BA3ER	LVR-IC	10.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84D	-	XC6701BA4ER	LVR-IC	10.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84E	-	XC6701BA5ER	LVR-IC	10.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84F	-	XC6701BA6ER	LVR-IC	10.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84H	-	MIC5305-4.75BML	LVR-IC	LDO, LN, +CE, 4.75V±1%, 150mA	MLF-6	56ub	VR7	9a	Mcr
84H	-	XC6701BA7ER	LVR-IC	10.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84H	mb	MIC5305-4.75YML	LVR-IC	LDO, LN, +CE, 4.75V±1%, 150mA, Pb-free	MLF-6	56ub	VR7	9a	Mcr
84K	-	XC6701BA8ER	LVR-IC	10.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84L	-	XC6701BA9ER	LVR-IC	10.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84M	-	XC6701BB0ER	LVR-IC	11.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84N	-	XC6701BB1ER	LVR-IC	11.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84P	-	XC6701BB2ER	LVR-IC	11.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84R	-	XC6701BB3ER	LVR-IC	11.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84S	-	XC6701BB4ER	LVR-IC	11.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84T	-	XC6701BB5ER	LVR-IC	11.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84U	-	XC6701BB6ER	LVR-IC	11.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84V	-	XC6701BB7ER	LVR-IC	11.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84X	-	XC6701BB8ER	LVR-IC	11.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84Y	-	XC6701BB9ER	LVR-IC	11.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
84Z	-	XC6701BC0ER	LVR-IC	12.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
85	-	RP110L271D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
85	-	XC6217D36A7R-G	LVR-IC	LDO, 3.65V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
85	-	XC6223A15B9R-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8512	-	Si9185DMP-12-T1	LVR-IC	LDO, 1.2V±1.5%, 500mA, +CE, Error	MLP33	61vr7	VR25	9m	Vs
8515	-	Si9185DMP-15-T1	LVR-IC	LDO, 1.5V±1.5%, 500mA, +CE, Error	MLP33	61vr7	VR25	9m	Vs
8518	-	Si9185DMP-18-T1	LVR-IC	LDO, 1.8V±1.5%, 500mA, +CE, Error	MLP33	61vr7	VR25	9m	Vs
8520	-	Si9185DMP-20-T1	LVR-IC	LDO, 2.0V±1.5%, 500mA, +CE, Error	MLP33	61vr7	VR25	9m	Vs
8525	-	Si9185DMP-25-T1	LVR-IC	LDO, 2.5V±1.5%, 500mA, +CE, Error	MLP33	61vr7	VR25	9m	Vs
8528	-	Si9185DMP-28-T1	LVR-IC	LDO, 2.8V±1.5%, 500mA, +CE, Error	MLP33	61vr7	VR25	9m	Vs
8529	-	Si9185DMP-29-T1	LVR-IC	LDO, 2.9V±1.5%, 500mA, +CE, Error	MLP33	61vr7	VR25	9m	Vs
8530	-	Si9185DMP-30-T1	LVR-IC	LDO, 3.0V±1.5%, 500mA, +CE, Error	MLP33	61vr7	VR25	9m	Vs
8533	-	Si9185DMP-33-T1	LVR-IC	LDO, 3.3V±1.5%, 500mA, +CE, Error	MLP33	61vr7	VR25	9m	Vs
8550	-	Si9185DMP-50-T1	LVR-IC	LDO, 5.0V±1.5%, 500mA, +CE, Error	MLP33	61vr7	VR25	9m	Vs
85AD	-	Si9185DMP-AD-T1	LVR-IC	LDO, Adj, 1.2..5V, 150mA, +CE, Error	MLP33	61vr8	VR25	9m	Vs
85BBA1	-	KBA2338-WCSP	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/3Ω), shutdown	BGA-9	39	AFP45	9a	Ktc
86	-	RP110L281D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
86	-	XC6217D37A7R-G	LVR-IC	LDO, 3.75V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
86	-	XC6223A16B9R-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
87	-	RP110L281D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
87	-	XC6217D38A7R-G	LVR-IC	LDO, 3.85V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
87	-	XC6223A17B9R-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8793	-	BU8793KN	Lin-IC	Sound generator for cellular phone	VQFN-28	38	-	9ab	Rhm
88	-	BBY58-02L	C-diode	VCO-tuning, 10V, 20mA, 17.5..19.3pF(4..1V)	TSLP-2-1	13d	-	2b	Inf
88	-	RP110L291D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
88	-	XC6217D39A7R-G	LVR-IC	LDO, 3.95V±2%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
88	-	XC6223A18B9R-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
89	-	RP110L301D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
89	-	XC6221B40B7R	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
89	-	XC6223A19B9R-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8A	-	RP103K121D	LVR-IC	LDO, 1.2V±1%, 150mA,, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8A	-	RP111L281B	LVR-IC	LDO, 2.8V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
8A	-	RP200K321D	LVR-IC	LDO, 3.2V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
8A	-	RP202K321B	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
8A	-	XC6223A20B9R-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8A0	-	XC6701BC1ER	LVR-IC	12.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8A016	-	XC6116A016ER	Vdet-IC	1.6V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A017	-	XC6116A017ER	Vdet-IC	1.7V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A018	-	XC6116A018ER	Vdet-IC	1.8V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A019	-	XC6116A019ER	Vdet-IC	1.9V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A020	-	XC6116A020ER	Vdet-IC	2.0V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A021	-	XC6116A021ER	Vdet-IC	2.1V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A022	-	XC6116A022ER	Vdet-IC	2.2V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A023	-	XC6116A023ER	Vdet-IC	2.3V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A024	-	XC6116A024ER	Vdet-IC	2.4V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A025	-	XC6116A025ER	Vdet-IC	2.5V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A026	-	XC6116A026ER	Vdet-IC	2.6V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A027	-	XC6116A027ER	Vdet-IC	2.7V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A028	-	XC6116A028ER	Vdet-IC	2.8V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A029	-	XC6116A029ER	Vdet-IC	2.9V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A030	-	XC6116A030ER	Vdet-IC	3.0V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A031	-	XC6116A031ER	Vdet-IC	3.1V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A032	-	XC6116A032ER	Vdet-IC	3.2V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A033	-	XC6116A033ER	Vdet-IC	3.3V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A034	-	XC6116A034ER	Vdet-IC	3.4V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A035	-	XC6116A035ER	Vdet-IC	3.5V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A036	-	XC6116A036ER	Vdet-IC	3.6V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A037	-	XC6116A037ER	Vdet-IC	3.7V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A038	-	XC6116A038ER	Vdet-IC	3.8V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A039	-	XC6116A039ER	Vdet-IC	3.9V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A040	-	XC6116A040ER	Vdet-IC	4.0V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A041	-	XC6116A041ER	Vdet-IC	4.1V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A042	-	XC6116A042ER	Vdet-IC	4.2V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A043	-	XC6116A043ER	Vdet-IC	4.3V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A044	-	XC6116A044ER	Vdet-IC	4.4V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A045	-	XC6116A045ER	Vdet-IC	4.5V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A046	-	XC6116A046ER	Vdet-IC	4.6V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A047	-	XC6116A047ER	Vdet-IC	4.7V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A048	-	XC6116A048ER	Vdet-IC	4.8V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A049	-	XC6116A049ER	Vdet-IC	4.9V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A050	-	XC6116A050ER	Vdet-IC	5.0V±2%, -MR, ±Reset PPO, Rt=3.13ms	USP-6C	49xs	VD21	9b	Tor
8A1	-	XC6701BC2ER	LVR-IC	12.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8A116	-	XC6111A116ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A117	-	XC6111A117ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8A118	-	XC6111A118ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A119	-	XC6111A119ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A120	-	XC6111A120ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A121	-	XC6111A121ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A122	-	XC6111A122ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A123	-	XC6111A123ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A124	-	XC6111A124ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A125	-	XC6111A125ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A126	-	XC6111A126ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A127	-	XC6111A127ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A128	-	XC6111A128ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A129	-	XC6111A129ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A130	-	XC6111A130ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A131	-	XC6111A131ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A132	-	XC6111A132ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A133	-	XC6111A133ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A134	-	XC6111A134ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A135	-	XC6111A135ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A136	-	XC6111A136ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A137	-	XC6111A137ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A138	-	XC6111A138ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A139	-	XC6111A139ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A140	-	XC6111A140ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A141	-	XC6111A141ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A142	-	XC6111A142ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A143	-	XC6111A143ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A144	-	XC6111A144ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A145	-	XC6111A145ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A146	-	XC6111A146ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A147	-	XC6111A147ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A148	-	XC6111A148ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A149	-	XC6111A149ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A150	-	XC6111A150ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A2	-	XC6701BC3ER	LVR-IC	12.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8A216	-	XC6111A216ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A217	-	XC6111A217ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A218	-	XC6111A218ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A219	-	XC6111A219ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A220	-	XC6111A220ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A221	-	XC6111A221ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A222	-	XC6111A222ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A223	-	XC6111A223ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A224	-	XC6111A224ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A225	-	XC6111A225ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A226	-	XC6111A226ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A227	-	XC6111A227ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A228	-	XC6111A228ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A229	-	XC6111A229ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A230	-	XC6111A230ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A231	-	XC6111A231ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A232	-	XC6111A232ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A233	-	XC6111A233ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A234	-	XC6111A234ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A235	-	XC6111A235ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A236	-	XC6111A236ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A237	-	XC6111A237ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A238	-	XC6111A238ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A239	-	XC6111A239ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A240	-	XC6111A240ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A241	-	XC6111A241ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A242	-	XC6111A242ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A243	-	XC6111A243ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A244	-	XC6111A244ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A245	-	XC6111A245ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A246	-	XC6111A246ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A247	-	XC6111A247ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A248	-	XC6111A248ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A249	-	XC6111A249ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A250	-	XC6111A250ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A3	-	XC6701BC4ER	LVR-IC	12.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor







SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8A316	-	XC6111A316ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A317	-	XC6111A317ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A318	-	XC6111A318ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A319	-	XC6111A319ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A320	-	XC6111A320ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A321	-	XC6111A321ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A322	-	XC6111A322ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A323	-	XC6111A323ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A324	-	XC6111A324ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A325	-	XC6111A325ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A326	-	XC6111A326ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A327	-	XC6111A327ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A328	-	XC6111A328ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A329	-	XC6111A329ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A330	-	XC6111A330ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A331	-	XC6111A331ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A332	-	XC6111A332ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A333	-	XC6111A333ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A334	-	XC6111A334ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A335	-	XC6111A335ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A336	-	XC6111A336ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A337	-	XC6111A337ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A338	-	XC6111A338ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A339	-	XC6111A339ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A340	-	XC6111A340ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A341	-	XC6111A341ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A342	-	XC6111A342ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A343	-	XC6111A343ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A344	-	XC6111A344ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A345	-	XC6111A345ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A346	-	XC6111A346ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A347	-	XC6111A347ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A348	-	XC6111A348ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A349	-	XC6111A349ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A350	-	XC6111A350ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A4	-	XC6701BC5ER	LVR-IC	12.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8A416	-	XC6111A416ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A417	-	XC6111A417ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A418	-	XC6111A418ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A419	-	XC6111A419ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A420	-	XC6111A420ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A421	-	XC6111A421ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A422	-	XC6111A422ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A423	-	XC6111A423ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A424	-	XC6111A424ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A425	-	XC6111A425ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A426	-	XC6111A426ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A427	-	XC6111A427ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A428	-	XC6111A428ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A429	-	XC6111A429ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A430	-	XC6111A430ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A431	-	XC6111A431ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A432	-	XC6111A432ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A433	-	XC6111A433ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A434	-	XC6111A434ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A435	-	XC6111A435ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A436	-	XC6111A436ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A437	-	XC6111A437ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A438	-	XC6111A438ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A439	-	XC6111A439ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A440	-	XC6111A440ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A441	-	XC6111A441ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A442	-	XC6111A442ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A443	-	XC6111A443ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A444	-	XC6111A444ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A445	-	XC6111A445ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A446	-	XC6111A446ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A447	-	XC6111A447ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A448	-	XC6111A448ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A449	-	XC6111A449ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8A450	-	XC6111A450ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A5	-	XC6701BC6ER	LVR-IC	12.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8A516	-	XC6111A516ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A517	-	XC6111A517ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A518	-	XC6111A518ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A519	-	XC6111A519ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A520	-	XC6111A520ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A521	-	XC6111A521ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A522	-	XC6111A522ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A523	-	XC6111A523ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A524	-	XC6111A524ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A525	-	XC6111A525ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A526	-	XC6111A526ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A527	-	XC6111A527ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A528	-	XC6111A528ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A529	-	XC6111A529ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A530	-	XC6111A530ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A531	-	XC6111A531ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A532	-	XC6111A532ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A533	-	XC6111A533ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A534	-	XC6111A534ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A535	-	XC6111A535ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A536	-	XC6111A536ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A537	-	XC6111A537ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A538	-	XC6111A538ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A539	-	XC6111A539ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A540	-	XC6111A540ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A541	-	XC6111A541ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A542	-	XC6111A542ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A543	-	XC6111A543ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A544	-	XC6111A544ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A545	-	XC6111A545ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A546	-	XC6111A546ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A547	-	XC6111A547ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A548	-	XC6111A548ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A549	-	XC6111A549ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A550	-	XC6111A550ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A6	-	XC6701BC7ER	LVR-IC	12.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8A616	-	XC6111A616ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A617	-	XC6111A617ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A618	-	XC6111A618ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A619	-	XC6111A619ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A620	-	XC6111A620ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A621	-	XC6111A621ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A622	-	XC6111A622ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A623	-	XC6111A623ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A624	-	XC6111A624ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A625	-	XC6111A625ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A626	-	XC6111A626ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A627	-	XC6111A627ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A628	-	XC6111A628ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A629	-	XC6111A629ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A630	-	XC6111A630ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A631	-	XC6111A631ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A632	-	XC6111A632ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A633	-	XC6111A633ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A634	-	XC6111A634ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A635	-	XC6111A635ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A636	-	XC6111A636ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A637	-	XC6111A637ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A638	-	XC6111A638ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A639	-	XC6111A639ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A640	-	XC6111A640ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A641	-	XC6111A641ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A642	-	XC6111A642ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A643	-	XC6111A643ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A644	-	XC6111A644ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A645	-	XC6111A645ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A646	-	XC6111A646ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A647	-	XC6111A647ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8A648	-	XC6111A648ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A649	-	XC6111A649ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A650	-	XC6111A650ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
8A7	-	XC6701BC8ER	LVR-IC	12.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8A8	-	MIC5388-SGYCS	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 150mA, +CE	BGA-6	40yf	VR19	9i	Mcr
8A8	-	XC6701BC9ER	LVR-IC	12.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8A8	-	XCL208B083DR	DC-DC-IC	PWM step-down, 3MHz, 0.8V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8A9	-	MIC5389-SGYCS	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 150mA, +CE, CL	BGA-6	40yf	VR19	9i	Mcr
8A9	-	XC6701BD0ER	LVR-IC	13.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8A9	-	XCL208B093DR	DC-DC-IC	PWM step-down, 3MHz, 0.9V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8AA	-	MIC5305BML	LVR-IC	LDO, LN, +CE, Adjustable 1.25..5.5V, 150mA	MLF-6	56u5	VR12	9a	Mcr
8AA	-	XC6701BD1ER	LVR-IC	13.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AA	mb	MIC5305YML	LVR-IC	LDO, LN, +CE, Adj, 1.25..5.5V, 150mA, Pb-free	MLF-6	56u5	VR12	9a	Mcr
8AB	-	XC6701BD2ER	LVR-IC	13.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AC	-	XC6701BD3ER	LVR-IC	13.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AD	-	XC6701BD4ER	LVR-IC	13.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AE	-	XC6701BD5ER	LVR-IC	13.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AF	-	XC6701BD6ER	LVR-IC	13.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AH	-	XC6701BD7ER	LVR-IC	13.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AK	-	XC6701BD8ER	LVR-IC	13.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AL	-	XC6701BD9ER	LVR-IC	13.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AL	-	XCL208B0L3DR	DC-DC-IC	PWM step-down, 3MHz, 0.85V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8AM	-	XC6701BE0ER	LVR-IC	14.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AM	-	XCL208B0M3DR	DC-DC-IC	PWM step-down, 3MHz, 0.95V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8AN	-	XC6701BE1ER	LVR-IC	14.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AP	-	XC6701BE2ER	LVR-IC	14.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AR	-	XC6701BE3ER	LVR-IC	14.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AS	-	XC6701BE4ER	LVR-IC	14.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AT	-	XC6701BE5ER	LVR-IC	14.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AU	-	XC6701BE6ER	LVR-IC	14.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AV	-	XC6701BE7ER	LVR-IC	14.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AX	-	XC6701BE8ER	LVR-IC	14.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AY	-	XC6701BE9ER	LVR-IC	14.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8AZ	-	XC6701BF0ER	LVR-IC	15.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8B	-	RP103K131D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8B	-	RP111L281B5	LVR-IC	LDO, 2.85V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
8B	-	RP200K331D	LVR-IC	LDO, 3.3V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
8B	-	RP202K331B	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
8B	-	XC6223A21B9R-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8B0	-	XC6701BF1ER	LVR-IC	15.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8B0	-	XCL208B103DR	DC-DC-IC	PWM step-down, 3MHz, 1.0V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8B016	-	XC6116B016ER	Vdet-IC	1.6V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B017	-	XC6116B017ER	Vdet-IC	1.7V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B018	-	XC6116B018ER	Vdet-IC	1.8V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B019	-	XC6116B019ER	Vdet-IC	1.9V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B020	-	XC6116B020ER	Vdet-IC	2.0V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B021	-	XC6116B021ER	Vdet-IC	2.1V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B022	-	XC6116B022ER	Vdet-IC	2.2V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B023	-	XC6116B023ER	Vdet-IC	2.3V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B024	-	XC6116B024ER	Vdet-IC	2.4V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B025	-	XC6116B025ER	Vdet-IC	2.5V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B026	-	XC6116B026ER	Vdet-IC	2.6V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B027	-	XC6116B027ER	Vdet-IC	2.7V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B028	-	XC6116B028ER	Vdet-IC	2.8V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B029	-	XC6116B029ER	Vdet-IC	2.9V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B030	-	XC6116B030ER	Vdet-IC	3.0V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B031	-	XC6116B031ER	Vdet-IC	3.1V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B032	-	XC6116B032ER	Vdet-IC	3.2V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B033	-	XC6116B033ER	Vdet-IC	3.3V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B034	-	XC6116B034ER	Vdet-IC	3.4V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B035	-	XC6116B035ER	Vdet-IC	3.5V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B036	-	XC6116B036ER	Vdet-IC	3.6V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B037	-	XC6116B037ER	Vdet-IC	3.7V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B038	-	XC6116B038ER	Vdet-IC	3.8V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B039	-	XC6116B039ER	Vdet-IC	3.9V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B040	-	XC6116B040ER	Vdet-IC	4.0V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B041	-	XC6116B041ER	Vdet-IC	4.1V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B042	-	XC6116B042ER	Vdet-IC	4.2V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B043	-	XC6116B043ER	Vdet-IC	4.3V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B044	-	XC6116B044ER	Vdet-IC	4.4V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor




SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8B045	-	XC6116B045ER	Vdet-IC	4.5V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B046	-	XC6116B046ER	Vdet-IC	4.6V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B047	-	XC6116B047ER	Vdet-IC	4.7V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B048	-	XC6116B048ER	Vdet-IC	4.8V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B049	-	XC6116B049ER	Vdet-IC	4.9V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B050	-	XC6116B050ER	Vdet-IC	5.0V±2%, -MR, ±Reset PPO, Rt=25ms	USP-6C	49xs	VD21	9b	Tor
8B1	-	XC6701BF2ER	LVR-IC	15.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8B1	-	XCL208B113DR	DC-DC-IC	PWM step-down, 3MHz, 1.1V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8B2	-	XC6701BF3ER	LVR-IC	15.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8B2	-	XCL208B123DR	DC-DC-IC	PWM step-down, 3MHz, 1.2V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8B216	-	XC6111B216ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B217	-	XC6111B217ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B218	-	XC6111B218ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B219	-	XC6111B219ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B220	-	XC6111B220ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B221	-	XC6111B221ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B222	-	XC6111B222ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B223	-	XC6111B223ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B224	-	XC6111B224ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B225	-	XC6111B225ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B226	-	XC6111B226ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B227	-	XC6111B227ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B228	-	XC6111B228ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B229	-	XC6111B229ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B230	-	XC6111B230ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B231	-	XC6111B231ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B232	-	XC6111B232ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B233	-	XC6111B233ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B234	-	XC6111B234ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B235	-	XC6111B235ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B236	-	XC6111B236ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B237	-	XC6111B237ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B238	-	XC6111B238ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B239	-	XC6111B239ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B240	-	XC6111B240ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B241	-	XC6111B241ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B242	-	XC6111B242ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B243	-	XC6111B243ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B244	-	XC6111B244ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B245	-	XC6111B245ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B246	-	XC6111B246ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B247	-	XC6111B247ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B248	-	XC6111B248ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B249	-	XC6111B249ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B250	-	XC6111B250ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B3	-	XC6701BF4ER	LVR-IC	15.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8B3	-	XCL208B133DR	DC-DC-IC	PWM step-down, 3MHz, 1.3V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8B316	-	XC6111B316ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B317	-	XC6111B317ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B318	-	XC6111B318ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B319	-	XC6111B319ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B320	-	XC6111B320ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B321	-	XC6111B321ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B322	-	XC6111B322ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B323	-	XC6111B323ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B324	-	XC6111B324ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B325	-	XC6111B325ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B326	-	XC6111B326ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B327	-	XC6111B327ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B328	-	XC6111B328ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B329	-	XC6111B329ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B330	-	XC6111B330ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B331	-	XC6111B331ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B332	-	XC6111B332ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B333	-	XC6111B333ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B334	-	XC6111B334ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B335	-	XC6111B335ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B336	-	XC6111B336ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B337	-	XC6111B337ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B338	-	XC6111B338ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8B339	-	XC6111B339ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B340	-	XC6111B340ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B341	-	XC6111B341ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B342	-	XC6111B342ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B343	-	XC6111B343ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B344	-	XC6111B344ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B345	-	XC6111B345ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B346	-	XC6111B346ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B347	-	XC6111B347ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B348	-	XC6111B348ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B349	-	XC6111B349ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B350	-	XC6111B350ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B4	-	XC6701BF5ER	LVR-IC	15.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8B4	-	XCL208B143DR	DC-DC-IC	PWM step-down, 3MHz, 1.4V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8B416	-	XC6111B416ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B417	-	XC6111B417ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B418	-	XC6111B418ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B419	-	XC6111B419ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B420	-	XC6111B420ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B421	-	XC6111B421ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B422	-	XC6111B422ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B423	-	XC6111B423ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B424	-	XC6111B424ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B425	-	XC6111B425ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B426	-	XC6111B426ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B427	-	XC6111B427ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B428	-	XC6111B428ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B429	-	XC6111B429ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B430	-	XC6111B430ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B431	-	XC6111B431ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B432	-	XC6111B432ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B433	-	XC6111B433ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B434	-	XC6111B434ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B435	-	XC6111B435ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B436	-	XC6111B436ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B437	-	XC6111B437ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B438	-	XC6111B438ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B439	-	XC6111B439ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B440	-	XC6111B440ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B441	-	XC6111B441ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B442	-	XC6111B442ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B443	-	XC6111B443ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B444	-	XC6111B444ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B445	-	XC6111B445ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B446	-	XC6111B446ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B447	-	XC6111B447ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B448	-	XC6111B448ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B449	-	XC6111B449ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B450	-	XC6111B450ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B5	-	XC6701BF6ER	LVR-IC	15.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8B5	-	XCL208B153DR	DC-DC-IC	PWM step-down, 3MHz, 1.5V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8B516	-	XC6111B516ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B517	-	XC6111B517ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B518	-	XC6111B518ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B519	-	XC6111B519ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B520	-	XC6111B520ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B521	-	XC6111B521ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B522	-	XC6111B522ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B523	-	XC6111B523ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B524	-	XC6111B524ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B525	-	XC6111B525ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B526	-	XC6111B526ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B527	-	XC6111B527ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B528	-	XC6111B528ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B529	-	XC6111B529ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B530	-	XC6111B530ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B531	-	XC6111B531ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B532	-	XC6111B532ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B533	-	XC6111B533ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B534	-	XC6111B534ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8B535	-	XC6111B535ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B536	-	XC6111B536ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B537	-	XC6111B537ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B538	-	XC6111B538ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B539	-	XC6111B539ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B540	-	XC6111B540ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B541	-	XC6111B541ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B542	-	XC6111B542ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B543	-	XC6111B543ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B544	-	XC6111B544ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B545	-	XC6111B545ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B546	-	XC6111B546ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B547	-	XC6111B547ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B548	-	XC6111B548ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B549	-	XC6111B549ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B550	-	XC6111B550ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B6	-	XC6701BF7ER	LVR-IC	15.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8B6	-	XCL208B163DR	DC-DC-IC	PWM step-down, 3MHz, 1.6V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8B616	-	XC6111B616ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B617	-	XC6111B617ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B618	-	XC6111B618ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B619	-	XC6111B619ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B620	-	XC6111B620ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B621	-	XC6111B621ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B622	-	XC6111B622ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B623	-	XC6111B623ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B624	-	XC6111B624ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B625	-	XC6111B625ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B626	-	XC6111B626ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B627	-	XC6111B627ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B628	-	XC6111B628ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B629	-	XC6111B629ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B630	-	XC6111B630ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B631	-	XC6111B631ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B632	-	XC6111B632ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B633	-	XC6111B633ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B634	-	XC6111B634ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B635	-	XC6111B635ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B636	-	XC6111B636ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B637	-	XC6111B637ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B638	-	XC6111B638ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B639	-	XC6111B639ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B640	-	XC6111B640ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B641	-	XC6111B641ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B642	-	XC6111B642ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B643	-	XC6111B643ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B644	-	XC6111B644ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B645	-	XC6111B645ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B646	-	XC6111B646ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B647	-	XC6111B647ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B648	-	XC6111B648ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B649	-	XC6111B649ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B650	-	XC6111B650ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
8B7	-	XC6701BF8ER	LVR-IC	15.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8B7	-	XCL208B173DR	DC-DC-IC	PWM step-down, 3MHz, 1.7V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8B8	-	MIC5388-MMYCS	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 150mA, +CE	BGA-6	40yf	VR19	9i	Mcr
8B8	-	XC6701BF9ER	LVR-IC	15.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8B8	-	XCL208B183DR	DC-DC-IC	PWM step-down, 3MHz, 1.8V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8B9	-	MIC5389-MMYCS	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 150mA, +CE, CL	BGA-6	40yf	VR19	9i	Mcr
8B9	-	XC6701BG0ER	LVR-IC	16.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8B9	-	XCL208B193DR	DC-DC-IC	PWM step-down, 3MHz, 1.9V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8BA	-	XC6701BG1ER	LVR-IC	16.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BA	-	XCL208B1A3DR	DC-DC-IC	PWM step-down, 3MHz, 1.05V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8BB	-	XC6701BG2ER	LVR-IC	16.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BB	-	XCL208B1B3DR	DC-DC-IC	PWM step-down, 3MHz, 1.15V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8BC	-	XC6701BG3ER	LVR-IC	16.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BC	-	XCL208B1C3DR	DC-DC-IC	PWM step-down, 3MHz, 1.25V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8BD	-	XC6701BG4ER	LVR-IC	16.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BD	-	XCL208B1D3DR	DC-DC-IC	PWM step-down, 3MHz, 1.35V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8BE	-	XC6701BG5ER	LVR-IC	16.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8BE	-	XCL208B1E3DR	DC-DC-IC	PWM step-down, 3MHz, 1.45V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8BF	-	XC6701BG6ER	LVR-IC	16.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BF	-	XCL208B1F3DR	DC-DC-IC	PWM step-down, 3MHz, 1.55V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8BH	-	XC6701BG7ER	LVR-IC	16.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BH	-	XCL208B1H3DR	DC-DC-IC	PWM step-down, 3MHz, 1.65V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8BK	-	XC6701BG8ER	LVR-IC	16.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BK	-	XCL208B1K3DR	DC-DC-IC	PWM step-down, 3MHz, 1.75V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8BL	-	XC6701BG9ER	LVR-IC	16.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BL	-	XCL208B1L3DR	DC-DC-IC	PWM step-down, 3MHz, 1.85V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8BM	-	XC6701BH0ER	LVR-IC	17.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BM	-	XCL208B1M3DR	DC-DC-IC	PWM step-down, 3MHz, 1.95V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8BN	-	XC6701BH1ER	LVR-IC	17.1V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BP	-	XC6701BH2ER	LVR-IC	17.2V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BR	-	XC6701BH3ER	LVR-IC	17.3V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BS	-	XC6701BH4ER	LVR-IC	17.4V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BT	-	XC6701BH5ER	LVR-IC	17.5V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BU	-	XC6701BH6ER	LVR-IC	17.6V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BV	-	XC6701BH7ER	LVR-IC	17.7V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BX	-	XC6701BH8ER	LVR-IC	17.8V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BY	-	XC6701BH9ER	LVR-IC	17.9V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8BZ	-	XC6701BJ0ER	LVR-IC	18.0V±2%, 150mA, +CE	USP-6C	49hu	VR4	9a	Tor
8C	-	RP103K151D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8C	-	RP111L291B	LVR-IC	LDO, 2.9V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
8C	-	RP200K341D	LVR-IC	LDO, 3.4V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
8C	-	RP202K341B	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
8C	-	XC6223A22B9R-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8C0	-	XCL208B203DR	DC-DC-IC	PWM step-down, 3MHz, 2.0V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8C016	-	XC6116C016ER	Vdet-IC	1.6V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C017	-	XC6116C017ER	Vdet-IC	1.7V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C018	-	XC6116C018ER	Vdet-IC	1.8V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C019	-	XC6116C019ER	Vdet-IC	1.9V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C020	-	XC6116C020ER	Vdet-IC	2.0V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C021	-	XC6116C021ER	Vdet-IC	2.1V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C022	-	XC6116C022ER	Vdet-IC	2.2V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C023	-	XC6116C023ER	Vdet-IC	2.3V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C024	-	XC6116C024ER	Vdet-IC	2.4V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C025	-	XC6116C025ER	Vdet-IC	2.5V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C026	-	XC6116C026ER	Vdet-IC	2.6V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C027	-	XC6116C027ER	Vdet-IC	2.7V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C028	-	XC6116C028ER	Vdet-IC	2.8V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C029	-	XC6116C029ER	Vdet-IC	2.9V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C030	-	XC6116C030ER	Vdet-IC	3.0V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C031	-	XC6116C031ER	Vdet-IC	3.1V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C032	-	XC6116C032ER	Vdet-IC	3.2V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C033	-	XC6116C033ER	Vdet-IC	3.3V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C034	-	XC6116C034ER	Vdet-IC	3.4V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C035	-	XC6116C035ER	Vdet-IC	3.5V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C036	-	XC6116C036ER	Vdet-IC	3.6V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C037	-	XC6116C037ER	Vdet-IC	3.7V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C038	-	XC6116C038ER	Vdet-IC	3.8V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C039	-	XC6116C039ER	Vdet-IC	3.9V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C040	-	XC6116C040ER	Vdet-IC	4.0V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C041	-	XC6116C041ER	Vdet-IC	4.1V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C042	-	XC6116C042ER	Vdet-IC	4.2V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C043	-	XC6116C043ER	Vdet-IC	4.3V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C044	-	XC6116C044ER	Vdet-IC	4.4V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C045	-	XC6116C045ER	Vdet-IC	4.5V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C046	-	XC6116C046ER	Vdet-IC	4.6V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C047	-	XC6116C047ER	Vdet-IC	4.7V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C048	-	XC6116C048ER	Vdet-IC	4.8V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C049	-	XC6116C049ER	Vdet-IC	4.9V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C050	-	XC6116C050ER	Vdet-IC	5.0V±2%, -MR, ±Reset PPO, Rt=50ms	USP-6C	49xs	VD21	9b	Tor
8C1	-	XCL208B213DR	DC-DC-IC	PWM step-down, 3MHz, 2.1V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8C2	-	XCL208B223DR	DC-DC-IC	PWM step-down, 3MHz, 2.2V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8C216	-	XC6111C216ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C217	-	XC6111C217ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C218	-	XC6111C218ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C219	-	XC6111C219ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C220	-	XC6111C220ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C221	-	XC6111C221ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8C222	-	XC6111C222ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C223	-	XC6111C223ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C224	-	XC6111C224ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C225	-	XC6111C225ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C226	-	XC6111C226ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C227	-	XC6111C227ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C228	-	XC6111C228ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C229	-	XC6111C229ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C230	-	XC6111C230ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C231	-	XC6111C231ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C232	-	XC6111C232ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C233	-	XC6111C233ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C234	-	XC6111C234ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C235	-	XC6111C235ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C236	-	XC6111C236ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C237	-	XC6111C237ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C238	-	XC6111C238ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C239	-	XC6111C239ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C240	-	XC6111C240ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C241	-	XC6111C241ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C242	-	XC6111C242ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C243	-	XC6111C243ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C244	-	XC6111C244ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C245	-	XC6111C245ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C246	-	XC6111C246ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C247	-	XC6111C247ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C248	-	XC6111C248ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C249	-	XC6111C249ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C250	-	XC6111C250ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C3	-	XCL208B233DR	DC-DC-IC	PWM step-down, 3MHz, 2.3V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8C316	-	XC6111C316ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C317	-	XC6111C317ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C318	-	XC6111C318ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C319	-	XC6111C319ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C320	-	XC6111C320ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C321	-	XC6111C321ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C322	-	XC6111C322ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C323	-	XC6111C323ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C324	-	XC6111C324ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C325	-	XC6111C325ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C326	-	XC6111C326ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C327	-	XC6111C327ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C328	-	XC6111C328ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C329	-	XC6111C329ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C330	-	XC6111C330ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C331	-	XC6111C331ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C332	-	XC6111C332ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C333	-	XC6111C333ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C334	-	XC6111C334ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C335	-	XC6111C335ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C336	-	XC6111C336ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C337	-	XC6111C337ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C338	-	XC6111C338ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C339	-	XC6111C339ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C340	-	XC6111C340ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C341	-	XC6111C341ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C342	-	XC6111C342ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C343	-	XC6111C343ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C344	-	XC6111C344ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C345	-	XC6111C345ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C346	-	XC6111C346ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C347	-	XC6111C347ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C348	-	XC6111C348ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C349	-	XC6111C349ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C350	-	XC6111C350ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C4	-	XCL208B243DR	DC-DC-IC	PWM step-down, 3MHz, 2.4V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8C416	-	XC6111C416ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C417	-	XC6111C417ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C418	-	XC6111C418ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C419	-	XC6111C419ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8C420	-	XC6111C420ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C421	-	XC6111C421ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C422	-	XC6111C422ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C423	-	XC6111C423ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C424	-	XC6111C424ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C425	-	XC6111C425ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C426	-	XC6111C426ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C427	-	XC6111C427ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C428	-	XC6111C428ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C429	-	XC6111C429ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C430	-	XC6111C430ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C431	-	XC6111C431ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C432	-	XC6111C432ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C433	-	XC6111C433ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C434	-	XC6111C434ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C435	-	XC6111C435ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C436	-	XC6111C436ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C437	-	XC6111C437ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C438	-	XC6111C438ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C439	-	XC6111C439ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C440	-	XC6111C440ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C441	-	XC6111C441ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C442	-	XC6111C442ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C443	-	XC6111C443ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C444	-	XC6111C444ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C445	-	XC6111C445ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C446	-	XC6111C446ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C447	-	XC6111C447ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C448	-	XC6111C448ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C449	-	XC6111C449ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C450	-	XC6111C450ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C5	-	XCL208B253DR	DC-DC-IC	PWM step-down, 3MHz, 2.5V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8C516	-	XC6111C516ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C517	-	XC6111C517ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C518	-	XC6111C518ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C519	-	XC6111C519ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C520	-	XC6111C520ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C521	-	XC6111C521ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C522	-	XC6111C522ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C523	-	XC6111C523ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C524	-	XC6111C524ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C525	-	XC6111C525ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C526	-	XC6111C526ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C527	-	XC6111C527ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C528	-	XC6111C528ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C529	-	XC6111C529ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C530	-	XC6111C530ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C531	-	XC6111C531ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C532	-	XC6111C532ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C533	-	XC6111C533ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C534	-	XC6111C534ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C535	-	XC6111C535ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C536	-	XC6111C536ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C537	-	XC6111C537ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C538	-	XC6111C538ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C539	-	XC6111C539ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C540	-	XC6111C540ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C541	-	XC6111C541ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C542	-	XC6111C542ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C543	-	XC6111C543ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C544	-	XC6111C544ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C545	-	XC6111C545ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C546	-	XC6111C546ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C547	-	XC6111C547ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C548	-	XC6111C548ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C549	-	XC6111C549ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C550	-	XC6111C550ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C6	-	XCL208B263DR	DC-DC-IC	PWM step-down, 3MHz, 2.6V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8C616	-	XC6111C616ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C617	-	XC6111C617ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8C618	-	XC6111C618ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C619	-	XC6111C619ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C620	-	XC6111C620ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C621	-	XC6111C621ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C622	-	XC6111C622ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C623	-	XC6111C623ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C624	-	XC6111C624ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C625	-	XC6111C625ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C626	-	XC6111C626ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C627	-	XC6111C627ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C628	-	XC6111C628ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C629	-	XC6111C629ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C630	-	XC6111C630ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C631	-	XC6111C631ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C632	-	XC6111C632ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C633	-	XC6111C633ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C634	-	XC6111C634ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C635	-	XC6111C635ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C636	-	XC6111C636ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C637	-	XC6111C637ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C638	-	XC6111C638ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C639	-	XC6111C639ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C640	-	XC6111C640ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C641	-	XC6111C641ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C642	-	XC6111C642ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C643	-	XC6111C643ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C644	-	XC6111C644ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C645	-	XC6111C645ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C646	-	XC6111C646ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C647	-	XC6111C647ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C648	-	XC6111C648ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C649	-	XC6111C649ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C650	-	XC6111C650ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
8C7	-	XCL208B273DR	DC-DC-IC	PWM step-down, 3MHz, 2.7V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8C8	-	MIC5388-MLYCS	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.7V±2%, 150mA, +CE	BGA-6	40yf	VR19	9i	Mcr
8C8	-	XCL208B283DR	DC-DC-IC	PWM step-down, 3MHz, 2.8V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8C9	-	MIC5389-MLYCS	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.7V±2%, 150mA, +CE, CL	BGA-6	40yf	VR19	9i	Mcr
8C9	-	XCL208B293DR	DC-DC-IC	PWM step-down, 3MHz, 2.9V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8CA	-	XCL208B2A3DR	DC-DC-IC	PWM step-down, 3MHz, 2.05V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8CB	-	XCL208B2B3DR	DC-DC-IC	PWM step-down, 3MHz, 2.15V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8CC	-	XCL208B2C3DR	DC-DC-IC	PWM step-down, 3MHz, 2.25V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8CD	-	XCL208B2D3DR	DC-DC-IC	PWM step-down, 3MHz, 2.35V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8CE	-	XCL208B2E3DR	DC-DC-IC	PWM step-down, 3MHz, 2.45V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8CF	-	XCL208B2F3DR	DC-DC-IC	PWM step-down, 3MHz, 2.55V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8CH	-	XCL208B2H3DR	DC-DC-IC	PWM step-down, 3MHz, 2.65V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8CK	-	XCL208B2K3DR	DC-DC-IC	PWM step-down, 3MHz, 2.75V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8CL	-	XCL208B2L3DR	DC-DC-IC	PWM step-down, 3MHz, 2.85V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8CM	-	XCL208B2M3DR	DC-DC-IC	PWM step-down, 3MHz, 2.95V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8D	-	RP103K181D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8D	-	RP111L301B	LVR-IC	LDO, 3.0V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
8D	-	RP200K351D	LVR-IC	LDO, 3.5V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
8D	-	RP202K351B	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
8D	-	XC6223A23B9R-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8D0	-	XCL208B303DR	DC-DC-IC	PWM step-down, 3MHz, 3.0V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8D016	-	XC6116D016ER	Vdet-IC	1.6V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D017	-	XC6116D017ER	Vdet-IC	1.7V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D018	-	XC6116D018ER	Vdet-IC	1.8V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D019	-	XC6116D019ER	Vdet-IC	1.9V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D020	-	XC6116D020ER	Vdet-IC	2.0V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D021	-	XC6116D021ER	Vdet-IC	2.1V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D022	-	XC6116D022ER	Vdet-IC	2.2V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D023	-	XC6116D023ER	Vdet-IC	2.3V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D024	-	XC6116D024ER	Vdet-IC	2.4V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D025	-	XC6116D025ER	Vdet-IC	2.5V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D026	-	XC6116D026ER	Vdet-IC	2.6V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D027	-	XC6116D027ER	Vdet-IC	2.7V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D028	-	XC6116D028ER	Vdet-IC	2.8V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D029	-	XC6116D029ER	Vdet-IC	2.9V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D030	-	XC6116D030ER	Vdet-IC	3.0V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D031	-	XC6116D031ER	Vdet-IC	3.1V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8D032	-	XC6116D032ER	Vdet-IC	3.2V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D033	-	XC6116D033ER	Vdet-IC	3.3V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D034	-	XC6116D034ER	Vdet-IC	3.4V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D035	-	XC6116D035ER	Vdet-IC	3.5V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D036	-	XC6116D036ER	Vdet-IC	3.6V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D037	-	XC6116D037ER	Vdet-IC	3.7V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D038	-	XC6116D038ER	Vdet-IC	3.8V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D039	-	XC6116D039ER	Vdet-IC	3.9V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D040	-	XC6116D040ER	Vdet-IC	4.0V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D041	-	XC6116D041ER	Vdet-IC	4.1V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D042	-	XC6116D042ER	Vdet-IC	4.2V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D043	-	XC6116D043ER	Vdet-IC	4.3V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D044	-	XC6116D044ER	Vdet-IC	4.4V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D045	-	XC6116D045ER	Vdet-IC	4.5V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D046	-	XC6116D046ER	Vdet-IC	4.6V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D047	-	XC6116D047ER	Vdet-IC	4.7V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D048	-	XC6116D048ER	Vdet-IC	4.8V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D049	-	XC6116D049ER	Vdet-IC	4.9V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D050	-	XC6116D050ER	Vdet-IC	5.0V±2%, -MR, ±Reset PPO, Rt=100ms	USP-6C	49xs	VD21	9b	Tor
8D1	-	XCL208B313DR	DC-DC-IC	PWM step-down, 3MHz, 3.1V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8D2	-	XCL208B323DR	DC-DC-IC	PWM step-down, 3MHz, 3.2V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8D3	-	XCL208B333DR	DC-DC-IC	PWM step-down, 3MHz, 3.3V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8D316	-	XC6111D316ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D317	-	XC6111D317ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D318	-	XC6111D318ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D319	-	XC6111D319ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D320	-	XC6111D320ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D321	-	XC6111D321ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D322	-	XC6111D322ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D323	-	XC6111D323ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D324	-	XC6111D324ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D325	-	XC6111D325ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D326	-	XC6111D326ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D327	-	XC6111D327ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D328	-	XC6111D328ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D329	-	XC6111D329ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D330	-	XC6111D330ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D331	-	XC6111D331ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D332	-	XC6111D332ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D333	-	XC6111D333ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D334	-	XC6111D334ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D335	-	XC6111D335ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D336	-	XC6111D336ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D337	-	XC6111D337ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D338	-	XC6111D338ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D339	-	XC6111D339ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D340	-	XC6111D340ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D341	-	XC6111D341ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D342	-	XC6111D342ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D343	-	XC6111D343ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D344	-	XC6111D344ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D345	-	XC6111D345ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D346	-	XC6111D346ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D347	-	XC6111D347ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D348	-	XC6111D348ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D349	-	XC6111D349ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D350	-	XC6111D350ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D4	-	XCL208B343DR	DC-DC-IC	PWM step-down, 3MHz, 3.4V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8D416	-	XC6111D416ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D417	-	XC6111D417ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D418	-	XC6111D418ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D419	-	XC6111D419ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D420	-	XC6111D420ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D421	-	XC6111D421ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D422	-	XC6111D422ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D423	-	XC6111D423ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D424	-	XC6111D424ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D425	-	XC6111D425ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D426	-	XC6111D426ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D427	-	XC6111D427ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8D428	-	XC6111D428ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D429	-	XC6111D429ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D430	-	XC6111D430ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D431	-	XC6111D431ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D432	-	XC6111D432ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D433	-	XC6111D433ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D434	-	XC6111D434ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D435	-	XC6111D435ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D436	-	XC6111D436ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D437	-	XC6111D437ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D438	-	XC6111D438ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D439	-	XC6111D439ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D440	-	XC6111D440ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D441	-	XC6111D441ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D442	-	XC6111D442ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D443	-	XC6111D443ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D444	-	XC6111D444ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D445	-	XC6111D445ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D446	-	XC6111D446ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D447	-	XC6111D447ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D448	-	XC6111D448ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D449	-	XC6111D449ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D450	-	XC6111D450ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D5	-	XCL208B353DR	DC-DC-IC	PWM step-down, 3MHz, 3.5V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8D516	-	XC6111D516ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D517	-	XC6111D517ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D518	-	XC6111D518ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D519	-	XC6111D519ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D520	-	XC6111D520ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D521	-	XC6111D521ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D522	-	XC6111D522ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D523	-	XC6111D523ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D524	-	XC6111D524ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D525	-	XC6111D525ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D526	-	XC6111D526ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D527	-	XC6111D527ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D528	-	XC6111D528ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D529	-	XC6111D529ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D530	-	XC6111D530ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D531	-	XC6111D531ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D532	-	XC6111D532ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D533	-	XC6111D533ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D534	-	XC6111D534ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D535	-	XC6111D535ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D536	-	XC6111D536ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D537	-	XC6111D537ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D538	-	XC6111D538ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D539	-	XC6111D539ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D540	-	XC6111D540ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D541	-	XC6111D541ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D542	-	XC6111D542ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D543	-	XC6111D543ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D544	-	XC6111D544ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D545	-	XC6111D545ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D546	-	XC6111D546ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D547	-	XC6111D547ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D548	-	XC6111D548ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D549	-	XC6111D549ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D550	-	XC6111D550ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D6	-	XCL208B363DR	DC-DC-IC	PWM step-down, 3MHz, 3.6V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8D616	-	XC6111D616ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D617	-	XC6111D617ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D618	-	XC6111D618ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D619	-	XC6111D619ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D620	-	XC6111D620ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D621	-	XC6111D621ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D622	-	XC6111D622ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D623	-	XC6111D623ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D624	-	XC6111D624ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D625	-	XC6111D625ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8D626	-	XC6111D626ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D627	-	XC6111D627ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D628	-	XC6111D628ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D629	-	XC6111D629ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D630	-	XC6111D630ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D631	-	XC6111D631ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D632	-	XC6111D632ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D633	-	XC6111D633ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D634	-	XC6111D634ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D635	-	XC6111D635ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D636	-	XC6111D636ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D637	-	XC6111D637ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D638	-	XC6111D638ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D639	-	XC6111D639ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D640	-	XC6111D640ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D641	-	XC6111D641ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D642	-	XC6111D642ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D643	-	XC6111D643ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D644	-	XC6111D644ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D645	-	XC6111D645ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D646	-	XC6111D646ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D647	-	XC6111D647ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D648	-	XC6111D648ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D649	-	XC6111D649ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D650	-	XC6111D650ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
8D7	-	XCL208B373DR	DC-DC-IC	PWM step-down, 3MHz, 3.7V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8D8	-	MIC5388-MGYCS	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 150mA, +CE	BGA-6	40yf	VR19	9i	Mcr
8D8	-	XCL208B383DR	DC-DC-IC	PWM step-down, 3MHz, 3.8V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8D9	-	MIC5389-MGYCS	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 150mA, +CE, CL	BGA-6	40yf	VR19	9i	Mcr
8D9	-	XCL208B393DR	DC-DC-IC	PWM step-down, 3MHz, 3.9V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8DA	-	XCL208B3A3DR	DC-DC-IC	PWM step-down, 3MHz, 3.05V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8DB	-	XCL208B3B3DR	DC-DC-IC	PWM step-down, 3MHz, 3.15V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8DC	-	XCL208B3C3DR	DC-DC-IC	PWM step-down, 3MHz, 3.25V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8DD	-	XCL208B3D3DR	DC-DC-IC	PWM step-down, 3MHz, 3.35V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8DE	-	XCL208B3E3DR	DC-DC-IC	PWM step-down, 3MHz, 3.45V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8DF	-	XCL208B3F3DR	DC-DC-IC	PWM step-down, 3MHz, 3.55V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8DH	-	XCL208B3H3DR	DC-DC-IC	PWM step-down, 3MHz, 3.65V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8DK	-	XCL208B3K3DR	DC-DC-IC	PWM step-down, 3MHz, 3.75V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8DL	-	XCL208B3L3DR	DC-DC-IC	PWM step-down, 3MHz, 3.85V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8DM	-	XCL208B3M3DR	DC-DC-IC	PWM step-down, 3MHz, 3.95V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8E	-	RP103K181D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8E	-	RP111L311B	LVR-IC	LDO, 3.1V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
8E	-	RP200K361D	LVR-IC	LDO, 3.6V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
8E	-	RP202K361B	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
8E	-	XC6223A24B9R-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8E0	-	XCL208B403DR	DC-DC-IC	PWM step-down, 3MHz, 4.0V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
8E016	-	XC6116E016ER	Vdet-IC	1.6V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E017	-	XC6116E017ER	Vdet-IC	1.7V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E018	-	XC6116E018ER	Vdet-IC	1.8V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E019	-	XC6116E019ER	Vdet-IC	1.9V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E020	-	XC6116E020ER	Vdet-IC	2.0V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E021	-	XC6116E021ER	Vdet-IC	2.1V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E022	-	XC6116E022ER	Vdet-IC	2.2V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E023	-	XC6116E023ER	Vdet-IC	2.3V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E024	-	XC6116E024ER	Vdet-IC	2.4V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E025	-	XC6116E025ER	Vdet-IC	2.5V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E026	-	XC6116E026ER	Vdet-IC	2.6V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E027	-	XC6116E027ER	Vdet-IC	2.7V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E028	-	XC6116E028ER	Vdet-IC	2.8V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E029	-	XC6116E029ER	Vdet-IC	2.9V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E030	-	XC6116E030ER	Vdet-IC	3.0V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E031	-	XC6116E031ER	Vdet-IC	3.1V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E032	-	XC6116E032ER	Vdet-IC	3.2V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E033	-	XC6116E033ER	Vdet-IC	3.3V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E034	-	XC6116E034ER	Vdet-IC	3.4V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E035	-	XC6116E035ER	Vdet-IC	3.5V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E036	-	XC6116E036ER	Vdet-IC	3.6V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E037	-	XC6116E037ER	Vdet-IC	3.7V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E038	-	XC6116E038ER	Vdet-IC	3.8V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E039	-	XC6116E039ER	Vdet-IC	3.9V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8E040	-	XC6116E040ER	Vdet-IC	4.0V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E041	-	XC6116E041ER	Vdet-IC	4.1V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E042	-	XC6116E042ER	Vdet-IC	4.2V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E043	-	XC6116E043ER	Vdet-IC	4.3V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E044	-	XC6116E044ER	Vdet-IC	4.4V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E045	-	XC6116E045ER	Vdet-IC	4.5V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E046	-	XC6116E046ER	Vdet-IC	4.6V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E047	-	XC6116E047ER	Vdet-IC	4.7V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E048	-	XC6116E048ER	Vdet-IC	4.8V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E049	-	XC6116E049ER	Vdet-IC	4.9V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E050	-	XC6116E050ER	Vdet-IC	5.0V±2%, -MR, ±Reset PPO, Rt=200ms	USP-6C	49xs	VD21	9b	Tor
8E416	-	XC6111E416ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E417	-	XC6111E417ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E418	-	XC6111E418ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E419	-	XC6111E419ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E420	-	XC6111E420ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E421	-	XC6111E421ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E422	-	XC6111E422ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E423	-	XC6111E423ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E424	-	XC6111E424ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E425	-	XC6111E425ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E426	-	XC6111E426ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E427	-	XC6111E427ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E428	-	XC6111E428ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E429	-	XC6111E429ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E430	-	XC6111E430ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E431	-	XC6111E431ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E432	-	XC6111E432ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E433	-	XC6111E433ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E434	-	XC6111E434ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E435	-	XC6111E435ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E436	-	XC6111E436ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E437	-	XC6111E437ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E438	-	XC6111E438ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E439	-	XC6111E439ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E440	-	XC6111E440ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E441	-	XC6111E441ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E442	-	XC6111E442ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E443	-	XC6111E443ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E444	-	XC6111E444ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E445	-	XC6111E445ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E446	-	XC6111E446ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E447	-	XC6111E447ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E448	-	XC6111E448ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E449	-	XC6111E449ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E450	-	XC6111E450ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E516	-	XC6111E516ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E517	-	XC6111E517ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E518	-	XC6111E518ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E519	-	XC6111E519ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E520	-	XC6111E520ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E521	-	XC6111E521ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E522	-	XC6111E522ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E523	-	XC6111E523ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E524	-	XC6111E524ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E525	-	XC6111E525ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E526	-	XC6111E526ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E527	-	XC6111E527ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E528	-	XC6111E528ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E529	-	XC6111E529ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E530	-	XC6111E530ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E531	-	XC6111E531ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E532	-	XC6111E532ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E533	-	XC6111E533ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E534	-	XC6111E534ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E535	-	XC6111E535ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E536	-	XC6111E536ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E537	-	XC6111E537ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E538	-	XC6111E538ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E539	-	XC6111E539ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8E540	-	XC6111E540ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E541	-	XC6111E541ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E542	-	XC6111E542ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E543	-	XC6111E543ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E544	-	XC6111E544ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E545	-	XC6111E545ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E546	-	XC6111E546ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E547	-	XC6111E547ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E548	-	XC6111E548ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E549	-	XC6111E549ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E550	-	XC6111E550ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E616	-	XC6111E616ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E617	-	XC6111E617ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E618	-	XC6111E618ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E619	-	XC6111E619ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E620	-	XC6111E620ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E621	-	XC6111E621ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E622	-	XC6111E622ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E623	-	XC6111E623ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E624	-	XC6111E624ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E625	-	XC6111E625ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E626	-	XC6111E626ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E627	-	XC6111E627ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E628	-	XC6111E628ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E629	-	XC6111E629ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E630	-	XC6111E630ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E631	-	XC6111E631ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E632	-	XC6111E632ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E633	-	XC6111E633ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E634	-	XC6111E634ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E635	-	XC6111E635ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E636	-	XC6111E636ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E637	-	XC6111E637ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E638	-	XC6111E638ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E639	-	XC6111E639ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E640	-	XC6111E640ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E641	-	XC6111E641ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E642	-	XC6111E642ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E643	-	XC6111E643ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E644	-	XC6111E644ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E645	-	XC6111E645ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E646	-	XC6111E646ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E647	-	XC6111E647ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E648	-	XC6111E648ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E649	-	XC6111E649ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E650	-	XC6111E650ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
8E8	-	MIC5388-M4YCS	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.2V±2%, 150mA, +CE	BGA-6	40yf	VR19	9i	Mcr
8E9	-	MIC5389-M4YCS	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.2V±2%, 150mA, +CE, CL	BGA-6	40yf	VR19	9i	Mcr
8F	-	RP103K191D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8F	-	RP111L321B	LVR-IC	LDO, 3.2V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
8F	-	RP200K371D	LVR-IC	LDO, 3.7V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
8F	-	RP202K371B	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
8F	-	XC6223A25B9R-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8F	-	XCL208F083DR	DC-DC-IC	PWM step-down, 3MHz, Adj. 0.9..4.0V, 400mA, +CE, CL	USP-10B03	107db	DC24	9a	Tor
8F016	-	XC6116F016ER	Vdet-IC	1.6V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F017	-	XC6116F017ER	Vdet-IC	1.7V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F018	-	XC6116F018ER	Vdet-IC	1.8V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F019	-	XC6116F019ER	Vdet-IC	1.9V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F020	-	XC6116F020ER	Vdet-IC	2.0V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F021	-	XC6116F021ER	Vdet-IC	2.1V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F022	-	XC6116F022ER	Vdet-IC	2.2V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F023	-	XC6116F023ER	Vdet-IC	2.3V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F024	-	XC6116F024ER	Vdet-IC	2.4V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F025	-	XC6116F025ER	Vdet-IC	2.5V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F026	-	XC6116F026ER	Vdet-IC	2.6V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F027	-	XC6116F027ER	Vdet-IC	2.7V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F028	-	XC6116F028ER	Vdet-IC	2.8V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F029	-	XC6116F029ER	Vdet-IC	2.9V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F030	-	XC6116F030ER	Vdet-IC	3.0V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F031	-	XC6116F031ER	Vdet-IC	3.1V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8F032	-	XC6116F032ER	Vdet-IC	3.2V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F033	-	XC6116F033ER	Vdet-IC	3.3V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F034	-	XC6116F034ER	Vdet-IC	3.4V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F035	-	XC6116F035ER	Vdet-IC	3.5V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F036	-	XC6116F036ER	Vdet-IC	3.6V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F037	-	XC6116F037ER	Vdet-IC	3.7V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F038	-	XC6116F038ER	Vdet-IC	3.8V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F039	-	XC6116F039ER	Vdet-IC	3.9V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F040	-	XC6116F040ER	Vdet-IC	4.0V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F041	-	XC6116F041ER	Vdet-IC	4.1V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F042	-	XC6116F042ER	Vdet-IC	4.2V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F043	-	XC6116F043ER	Vdet-IC	4.3V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F044	-	XC6116F044ER	Vdet-IC	4.4V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F045	-	XC6116F045ER	Vdet-IC	4.5V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F046	-	XC6116F046ER	Vdet-IC	4.6V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F047	-	XC6116F047ER	Vdet-IC	4.7V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F048	-	XC6116F048ER	Vdet-IC	4.8V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F049	-	XC6116F049ER	Vdet-IC	4.9V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F050	-	XC6116F050ER	Vdet-IC	5.0V±2%, -MR, ±Reset PPO, Rt=400ms	USP-6C	49xs	VD21	9b	Tor
8F516	-	XC6111F516ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F517	-	XC6111F517ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F518	-	XC6111F518ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F519	-	XC6111F519ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F520	-	XC6111F520ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F521	-	XC6111F521ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F522	-	XC6111F522ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F523	-	XC6111F523ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F524	-	XC6111F524ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F525	-	XC6111F525ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F526	-	XC6111F526ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F527	-	XC6111F527ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F528	-	XC6111F528ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F529	-	XC6111F529ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F530	-	XC6111F530ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F531	-	XC6111F531ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F532	-	XC6111F532ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F533	-	XC6111F533ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F534	-	XC6111F534ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F535	-	XC6111F535ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F536	-	XC6111F536ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F537	-	XC6111F537ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F538	-	XC6111F538ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F539	-	XC6111F539ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F540	-	XC6111F540ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F541	-	XC6111F541ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F542	-	XC6111F542ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F543	-	XC6111F543ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F544	-	XC6111F544ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F545	-	XC6111F545ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F546	-	XC6111F546ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F547	-	XC6111F547ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F548	-	XC6111F548ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F549	-	XC6111F549ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F550	-	XC6111F550ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F616	-	XC6111F616ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F617	-	XC6111F617ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F618	-	XC6111F618ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F619	-	XC6111F619ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F620	-	XC6111F620ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F621	-	XC6111F621ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F622	-	XC6111F622ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F623	-	XC6111F623ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F624	-	XC6111F624ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F625	-	XC6111F625ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F626	-	XC6111F626ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F627	-	XC6111F627ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F628	-	XC6111F628ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F629	-	XC6111F629ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F630	-	XC6111F630ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F631	-	XC6111F631ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8F632	-	XC6111F632ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F633	-	XC6111F633ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F634	-	XC6111F634ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F635	-	XC6111F635ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F636	-	XC6111F636ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F637	-	XC6111F637ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F638	-	XC6111F638ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F639	-	XC6111F639ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F640	-	XC6111F640ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F641	-	XC6111F641ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F642	-	XC6111F642ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F643	-	XC6111F643ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F644	-	XC6111F644ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F645	-	XC6111F645ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F646	-	XC6111F646ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F647	-	XC6111F647ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F648	-	XC6111F648ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F649	-	XC6111F649ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F650	-	XC6111F650ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
8F8	-	MIC5388-G4YCS	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.2V±2%, 150mA, +CE	BGA-6	40yf	VR19	9i	Mcr
8F9	-	MIC5389-G4YCS	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.2V±2%, 150mA, +CE, CL	BGA-6	40yf	VR19	9i	Mcr
8G	-	RP103K201D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8G	-	RP111L331B	LVR-IC	LDO, 3.3V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
8G	-	RP200K381D	LVR-IC	LDO, 3.8V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
8G	-	RP202K381B	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
8G4	-	MIC5370-1.8/1.2YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.2V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
8H	-	RP103K251D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8H	-	RP111L341B	LVR-IC	LDO, 3.4V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
8H	-	RP200K391D	LVR-IC	LDO, 3.9V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
8H	-	RP202K391B	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
8H	-	XC6223A26B9R-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8H016	-	XC6116H016ER	Vdet-IC	1.6V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H017	-	XC6116H017ER	Vdet-IC	1.7V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H018	-	XC6116H018ER	Vdet-IC	1.8V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H019	-	XC6116H019ER	Vdet-IC	1.9V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H020	-	XC6116H020ER	Vdet-IC	2.0V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H021	-	XC6116H021ER	Vdet-IC	2.1V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H022	-	XC6116H022ER	Vdet-IC	2.2V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H023	-	XC6116H023ER	Vdet-IC	2.3V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H024	-	XC6116H024ER	Vdet-IC	2.4V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H025	-	XC6116H025ER	Vdet-IC	2.5V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H026	-	XC6116H026ER	Vdet-IC	2.6V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H027	-	XC6116H027ER	Vdet-IC	2.7V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H028	-	XC6116H028ER	Vdet-IC	2.8V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H029	-	XC6116H029ER	Vdet-IC	2.9V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H030	-	XC6116H030ER	Vdet-IC	3.0V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H031	-	XC6116H031ER	Vdet-IC	3.1V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H032	-	XC6116H032ER	Vdet-IC	3.2V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H033	-	XC6116H033ER	Vdet-IC	3.3V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H034	-	XC6116H034ER	Vdet-IC	3.4V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H035	-	XC6116H035ER	Vdet-IC	3.5V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H036	-	XC6116H036ER	Vdet-IC	3.6V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H037	-	XC6116H037ER	Vdet-IC	3.7V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H038	-	XC6116H038ER	Vdet-IC	3.8V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H039	-	XC6116H039ER	Vdet-IC	3.9V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H040	-	XC6116H040ER	Vdet-IC	4.0V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H041	-	XC6116H041ER	Vdet-IC	4.1V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H042	-	XC6116H042ER	Vdet-IC	4.2V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H043	-	XC6116H043ER	Vdet-IC	4.3V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H044	-	XC6116H044ER	Vdet-IC	4.4V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H045	-	XC6116H045ER	Vdet-IC	4.5V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H046	-	XC6116H046ER	Vdet-IC	4.6V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H047	-	XC6116H047ER	Vdet-IC	4.7V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H048	-	XC6116H048ER	Vdet-IC	4.8V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H049	-	XC6116H049ER	Vdet-IC	4.9V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H050	-	XC6116H050ER	Vdet-IC	5.0V±2%, -MR, ±Reset PPO, Rt=1.6s	USP-6C	49xs	VD21	9b	Tor
8H616	-	XC6111H616ER	Vdet-IC	1.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H617	-	XC6111H617ER	Vdet-IC	1.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H618	-	XC6111H618ER	Vdet-IC	1.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H619	-	XC6111H619ER	Vdet-IC	1.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8H620	-	XC6111H620ER	Vdet-IC	2.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H621	-	XC6111H621ER	Vdet-IC	2.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H622	-	XC6111H622ER	Vdet-IC	2.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H623	-	XC6111H623ER	Vdet-IC	2.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H624	-	XC6111H624ER	Vdet-IC	2.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H625	-	XC6111H625ER	Vdet-IC	2.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H626	-	XC6111H626ER	Vdet-IC	2.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H627	-	XC6111H627ER	Vdet-IC	2.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H628	-	XC6111H628ER	Vdet-IC	2.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H629	-	XC6111H629ER	Vdet-IC	2.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H630	-	XC6111H630ER	Vdet-IC	3.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H631	-	XC6111H631ER	Vdet-IC	3.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H632	-	XC6111H632ER	Vdet-IC	3.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H633	-	XC6111H633ER	Vdet-IC	3.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H634	-	XC6111H634ER	Vdet-IC	3.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H635	-	XC6111H635ER	Vdet-IC	3.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H636	-	XC6111H636ER	Vdet-IC	3.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H637	-	XC6111H637ER	Vdet-IC	3.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H638	-	XC6111H638ER	Vdet-IC	3.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H639	-	XC6111H639ER	Vdet-IC	3.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H640	-	XC6111H640ER	Vdet-IC	4.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H641	-	XC6111H641ER	Vdet-IC	4.1V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H642	-	XC6111H642ER	Vdet-IC	4.2V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H643	-	XC6111H643ER	Vdet-IC	4.3V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H644	-	XC6111H644ER	Vdet-IC	4.4V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H645	-	XC6111H645ER	Vdet-IC	4.5V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H646	-	XC6111H646ER	Vdet-IC	4.6V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H647	-	XC6111H647ER	Vdet-IC	4.7V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H648	-	XC6111H648ER	Vdet-IC	4.8V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H649	-	XC6111H649ER	Vdet-IC	4.9V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8H650	-	XC6111H650ER	Vdet-IC	5.0V±2%, -MR, -Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
8J	-	RP103K261D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8J	-	RP111L351B	LVR-IC	LDO, 3.5V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
8J	-	RP200K401D	LVR-IC	LDO, 4.0V±1.0%, 300mA, +CE, CL, AE(mode)	DFN1212-6	52ht	VR10	9a	Ric
8J	-	RP202K401B	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
8K	-	RP103K271D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8K	-	RP111L361B	LVR-IC	LDO, 3.6V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
8K	-	RP202K281B5	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
8K	-	XC6223A27B9R-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8L	-	RP103K281D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8L	-	RP111L101B5	LVR-IC	LDO, 1.05V±0.8%, 500mA, +CE	DFN1212-6	65e6	VR6a	9a	Ric
8L	-	RP202K121B5	LVR-IC	LDO, 1.25V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
8L	-	XC6223A28B9R-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8M	-	RP103K281D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8M	-	RP202K291B5	LVR-IC	LDO, 2.95V±1%, 200mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
8M	-	XC6223A29B9R-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8N	-	RP103K291D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8N	-	XC6223A30B9R-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8P	-	RP103K301D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8P	-	XC6223A31B9R-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8Q	-	RP103K311D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8R	-	RP103K331D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8R	-	XC6223A32B9R-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8S	-	RP103K231B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
8S	-	XC6223A33B9R-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8SS	-	MIC5370-3.3/3.3YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
8T	-	RP103K211D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8T	-	XC6223A34B9R-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8U	-	RP103K321D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8U	-	XC6223A35B9R-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8V	-	RP103K291D5	LVR-IC	LDO, 2.95V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8V	-	XC6223A36B9R-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8W	-	RP103K221D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8X	-	RP103K161D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8X	-	XC6221B41B7R	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
8X	-	XC6223A37B9R-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8Y	-	RP103K141D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
8Y	-	XC6221B42B7R	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
8Y	-	XC6223A38B9R-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
8Z	-	RP103K171D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8Z	-	XC6221B43B7R	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
8Z	-	XC6223A39B9R-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
9	-	BU37UA3WNVX	LVR-IC	LDO, 3.7V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
90	-	RP110L311D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
902	-	XC6223G121GR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
903	-	XC6223G131GR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
904	-	XC6223G141GR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
905	-	XC6223G151GR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
906	-	XC6223G161GR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
907	-	XC6223G171GR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
908	-	XC6223G181GR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
908	-	XCL209A083DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 0.8V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
909	-	XC6223G191GR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
909	-	XCL209A093DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 0.9V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
90A	-	XC6223G201GR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90B	-	XC6223G211GR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90C	-	XC6223G221GR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90D	-	XC6223G231GR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90E	-	XC6223G241GR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90F	-	XC6223G251GR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90H	-	XC6223G261GR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90K	-	XC6223G271GR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90L	-	XC6223G281GR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90L	-	XCL209A0L3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 0.85V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
90M	-	XC6223G291GR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90M	-	XCL209A0M3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 0.95V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
90N	-	XC6223G301GR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90P	-	XC6223G311GR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90R	-	XC6223G321GR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90S	-	XC6223G331GR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90T	-	XC6223G341GR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90U	-	XC6223G351GR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90V	-	XC6223G361GR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90X	-	XC6223G371GR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90Y	-	XC6223G381GR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
90Z	-	XC6223G391GR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
91	-	RP110L321D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
910	-	XC6223G401GR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
910	-	XCL209A103DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.0V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
911	-	XCL209A113DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.1V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
912	-	XCL209A123DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.2V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
913	-	XCL209A133DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.3V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
914	-	XCL209A143DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.4V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
915	-	XCL209A153DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.5V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
916	-	XCL209A163DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.6V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
917	-	XCL209A173DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.7V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
918	-	XCL209A183DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.8V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
919	-	XCL209A193DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.9V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
91A	-	XCL209A1A3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.05V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
91A	-	ZXTC4591AMC	Si-n/p	Dual, Sw, 40V, 1.5A, 1.5W, B=300..900, 150MHz	DFN3020B-8	85a5	-	9m	Zx
91B	-	XCL209A1B3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.15V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
91C	-	XCL209A1C3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.25V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
91D	-	XCL209A1D3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.35V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
91E	-	XCL209A1E3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.45V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
91F	-	XCL209A1F3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.55V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
91H	-	XCL209A1H3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.65V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
91K	-	XCL209A1K3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.75V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
91L	-	XCL209A1L3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.85V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
91M	-	XCL209A1M3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.95V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
92	-	RP110L331D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
92	-	XC6223B12B9R-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
920	-	XCL209A203DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.0V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
921	-	XCL209A213DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.1V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
922	-	XC6223G12BGR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
922	-	XCL209A223DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.2V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
923	-	XC6223G13BGR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
923	-	XCL209A233DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.3V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
924	-	XC6223G14BGR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
924	-	XCL209A243DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.4V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
925	-	XC6223G15BGR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
925	-	XCL209A253DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.5V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
926	-	XC6223G16BGR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
926	-	XCL209A263DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.6V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
927	-	XC6223G17BGR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
927	-	XCL209A273DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.7V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
928	-	XC6223G18BGR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
928	-	XCL209A283DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.8V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
929	-	XC6223G19BGR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
929	-	XCL209A293DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.9V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
92A	-	XC6223G20BGR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92A	-	XCL209A2A3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.05V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
92B	-	XC6223G21BGR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92B	-	XCL209A2B3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.15V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
92C	-	XC6223G22BGR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92C	-	XCL209A2C3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.25V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
92D	-	XC6223G23BGR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92D	-	XCL209A2D3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.35V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
92E	-	XC6223G24BGR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92E	-	XCL209A2E3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.45V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
92F	-	XC6223G25BGR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92F	-	XCL209A2F3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.55V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
92H	-	XC6223G26BGR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92H	-	XCL209A2H3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.65V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
92K	-	XC6223G27BGR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92K	-	XCL209A2K3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.75V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
92L	-	XC6223G28BGR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92L	-	XCL209A2L3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.85V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
92M	-	XC6223G29BGR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92M	-	XCL209A2M3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.95V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
92N	-	XC6223G30BGR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92P	-	XC6223G31BGR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92R	-	XC6223G32BGR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92S	-	XC6223G33BGR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92T	-	XC6223G34BGR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92U	-	XC6223G35BGR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92V	-	XC6223G36BGR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92X	-	XC6223G37BGR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92Y	-	XC6223G38BGR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
92Z	-	XC6223G39BGR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93	-	RP110L341D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
93	-	XC6223B13B9R-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
930	-	XCL209A303DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.0V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
931	-	XCL209A313DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.1V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
932	-	XC6223H121GR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
932	-	XCL209A323DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.2V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
933	-	XC6223H131GR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
933	-	XCL209A333DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.3V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
934	-	XC6223H141GR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
934	-	XCL209A343DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.4V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
935	-	XC6223H151GR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
935	-	XCL209A353DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.5V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
936	-	XC6223H161GR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
936	-	XCL209A363DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.6V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
937	-	XC6223H171GR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
937	-	XCL209A373DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.7V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
938	-	XC6223H181GR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
938	-	XCL209A383DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.8V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
939	-	XC6223H191GR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
939	-	XCL209A393DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.9V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
93A	-	XC6223H201GR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93A	-	XCL209A3A3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.05V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
93A10	-	LN1193A102DR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A11	-	LN1193A112DR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A12	-	LN1193A122DR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A13	-	LN1193A132DR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A14	-	LN1193A142DR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A15	-	LN1193A152DR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A16	-	LN1193A162DR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A17	-	LN1193A172DR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A18	-	LN1193A182DR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
93A19	-	LN1193A192DR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A1A	-	LN1193A10ADR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A1B	-	LN1193A11ADR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A1C	-	LN1193A12ADR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A1D	-	LN1193A13ADR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A1E	-	LN1193A14ADR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A1F	-	LN1193A15ADR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A1H	-	LN1193A16ADR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A1K	-	LN1193A17ADR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A1L	-	LN1193A18ADR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A1M	-	LN1193A19ADR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A20	-	LN1193A202DR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A21	-	LN1193A212DR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A22	-	LN1193A222DR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A23	-	LN1193A232DR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A24	-	LN1193A242DR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A25	-	LN1193A252DR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A26	-	LN1193A262DR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A27	-	LN1193A272DR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A28	-	LN1193A282DR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A29	-	LN1193A292DR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A2A	-	LN1193A20ADR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A2B	-	LN1193A21ADR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A2C	-	LN1193A22ADR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A2D	-	LN1193A23ADR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A2E	-	LN1193A24ADR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A2F	-	LN1193A25ADR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A2H	-	LN1193A26ADR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A2K	-	LN1193A27ADR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A2L	-	LN1193A28ADR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A2M	-	LN1193A29ADR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A30	-	LN1193A302DR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A31	-	LN1193A312DR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A32	-	LN1193A322DR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A33	-	LN1193A332DR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A34	-	LN1193A342DR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A35	-	LN1193A352DR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A36	-	LN1193A362DR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A37	-	LN1193A372DR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A38	-	LN1193A382DR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A39	-	LN1193A392DR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A3A	-	LN1193A30ADR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A3B	-	LN1193A31ADR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A3C	-	LN1193A32ADR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A3D	-	LN1193A33ADR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A3E	-	LN1193A34ADR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A3F	-	LN1193A35ADR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A3H	-	LN1193A36ADR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A3K	-	LN1193A37ADR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A3L	-	LN1193A38ADR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A3M	-	LN1193A39ADR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A40	-	LN1193A402DR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A41	-	LN1193A412DR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A42	-	LN1193A422DR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A43	-	LN1193A432DR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A44	-	LN1193A442DR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A45	-	LN1193A452DR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A46	-	LN1193A462DR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A47	-	LN1193A472DR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A48	-	LN1193A482DR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A49	-	LN1193A492DR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A4A	-	LN1193A40ADR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A4B	-	LN1193A41ADR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A4C	-	LN1193A42ADR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A4D	-	LN1193A43ADR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A4E	-	LN1193A44ADR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A4F	-	LN1193A45ADR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A4H	-	LN1193A46ADR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A4K	-	LN1193A47ADR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A4L	-	LN1193A48ADR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
93A4M	-	LN1193A49ADR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A50	-	LN1193A502DR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A51	-	LN1193A512DR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A52	-	LN1193A522DR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A53	-	LN1193A532DR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A54	-	LN1193A542DR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A55	-	LN1193A552DR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A56	-	LN1193A562DR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A57	-	LN1193A572DR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A58	-	LN1193A582DR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A59	-	LN1193A592DR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A5A	-	LN1193A50ADR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A5B	-	LN1193A51ADR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A5C	-	LN1193A52ADR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A5D	-	LN1193A53ADR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A5E	-	LN1193A54ADR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A5F	-	LN1193A55ADR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A5H	-	LN1193A56ADR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A5K	-	LN1193A57ADR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A5L	-	LN1193A58ADR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A5M	-	LN1193A59ADR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93A60	-	LN1193A602DR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE, PDR	DFN-6	74ub	VR7	9b	Nln
93B	-	XC6223H211GR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93B	-	XCL209A3B3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.15V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
93B10	-	LN1193B102DR	LVR-IC	LDO, 1.0V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B11	-	LN1193B112DR	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B12	-	LN1193B122DR	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B13	-	LN1193B132DR	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B14	-	LN1193B142DR	LVR-IC	LDO, 1.4V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B15	-	LN1193B152DR	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B16	-	LN1193B162DR	LVR-IC	LDO, 1.6V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B17	-	LN1193B172DR	LVR-IC	LDO, 1.7V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B18	-	LN1193B182DR	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B19	-	LN1193B192DR	LVR-IC	LDO, 1.9V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B1A	-	LN1193B10ADR	LVR-IC	LDO, 1.05V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B1B	-	LN1193B11ADR	LVR-IC	LDO, 1.15V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B1C	-	LN1193B12ADR	LVR-IC	LDO, 1.25V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B1D	-	LN1193B13ADR	LVR-IC	LDO, 1.35V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B1E	-	LN1193B14ADR	LVR-IC	LDO, 1.45V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B1F	-	LN1193B15ADR	LVR-IC	LDO, 1.55V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B1H	-	LN1193B16ADR	LVR-IC	LDO, 1.65V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B1K	-	LN1193B17ADR	LVR-IC	LDO, 1.75V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B1L	-	LN1193B18ADR	LVR-IC	LDO, 1.85V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B1M	-	LN1193B19ADR	LVR-IC	LDO, 1.95V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B20	-	LN1193B202DR	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B21	-	LN1193B212DR	LVR-IC	LDO, 2.1V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B22	-	LN1193B222DR	LVR-IC	LDO, 2.2V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B23	-	LN1193B232DR	LVR-IC	LDO, 2.3V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B24	-	LN1193B242DR	LVR-IC	LDO, 2.4V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B25	-	LN1193B252DR	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B26	-	LN1193B262DR	LVR-IC	LDO, 2.6V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B27	-	LN1193B272DR	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B28	-	LN1193B282DR	LVR-IC	LDO, 2.8V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B29	-	LN1193B292DR	LVR-IC	LDO, 2.9V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B2A	-	LN1193B20ADR	LVR-IC	LDO, 2.05V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B2B	-	LN1193B21ADR	LVR-IC	LDO, 2.15V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B2C	-	LN1193B22ADR	LVR-IC	LDO, 2.25V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B2D	-	LN1193B23ADR	LVR-IC	LDO, 2.35V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B2E	-	LN1193B24ADR	LVR-IC	LDO, 2.45V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B2F	-	LN1193B25ADR	LVR-IC	LDO, 2.55V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B2H	-	LN1193B26ADR	LVR-IC	LDO, 2.65V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B2K	-	LN1193B27ADR	LVR-IC	LDO, 2.75V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B2L	-	LN1193B28ADR	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B2M	-	LN1193B29ADR	LVR-IC	LDO, 2.95V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B30	-	LN1193B302DR	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B31	-	LN1193B312DR	LVR-IC	LDO, 3.1V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B32	-	LN1193B322DR	LVR-IC	LDO, 3.2V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B33	-	LN1193B332DR	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B34	-	LN1193B342DR	LVR-IC	LDO, 3.4V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B35	-	LN1193B352DR	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
93B36	-	LN1193B362DR	LVR-IC	LDO, 3.6V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B37	-	LN1193B372DR	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B38	-	LN1193B382DR	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B39	-	LN1193B392DR	LVR-IC	LDO, 3.9V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B3A	-	LN1193B30ADR	LVR-IC	LDO, 3.05V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B3B	-	LN1193B31ADR	LVR-IC	LDO, 3.15V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B3C	-	LN1193B32ADR	LVR-IC	LDO, 3.25V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B3D	-	LN1193B33ADR	LVR-IC	LDO, 3.35V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B3E	-	LN1193B34ADR	LVR-IC	LDO, 3.45V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B3F	-	LN1193B35ADR	LVR-IC	LDO, 3.55V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B3H	-	LN1193B36ADR	LVR-IC	LDO, 3.65V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B3K	-	LN1193B37ADR	LVR-IC	LDO, 3.75V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B3L	-	LN1193B38ADR	LVR-IC	LDO, 3.85V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B3M	-	LN1193B39ADR	LVR-IC	LDO, 3.95V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B40	-	LN1193B402DR	LVR-IC	LDO, 4.0V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B41	-	LN1193B412DR	LVR-IC	LDO, 4.1V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B42	-	LN1193B422DR	LVR-IC	LDO, 4.2V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B43	-	LN1193B432DR	LVR-IC	LDO, 4.3V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B44	-	LN1193B442DR	LVR-IC	LDO, 4.4V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B45	-	LN1193B452DR	LVR-IC	LDO, 4.5V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B46	-	LN1193B462DR	LVR-IC	LDO, 4.6V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B47	-	LN1193B472DR	LVR-IC	LDO, 4.7V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B48	-	LN1193B482DR	LVR-IC	LDO, 4.8V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B49	-	LN1193B492DR	LVR-IC	LDO, 4.9V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B4A	-	LN1193B40ADR	LVR-IC	LDO, 4.05V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B4B	-	LN1193B41ADR	LVR-IC	LDO, 4.15V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B4C	-	LN1193B42ADR	LVR-IC	LDO, 4.25V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B4D	-	LN1193B43ADR	LVR-IC	LDO, 4.35V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B4E	-	LN1193B44ADR	LVR-IC	LDO, 4.45V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B4F	-	LN1193B45ADR	LVR-IC	LDO, 4.55V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B4H	-	LN1193B46ADR	LVR-IC	LDO, 4.65V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B4K	-	LN1193B47ADR	LVR-IC	LDO, 4.75V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B4L	-	LN1193B48ADR	LVR-IC	LDO, 4.85V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B4M	-	LN1193B49ADR	LVR-IC	LDO, 4.95V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B50	-	LN1193B502DR	LVR-IC	LDO, 5.0V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B51	-	LN1193B512DR	LVR-IC	LDO, 5.1V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B52	-	LN1193B522DR	LVR-IC	LDO, 5.2V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B53	-	LN1193B532DR	LVR-IC	LDO, 5.3V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B54	-	LN1193B542DR	LVR-IC	LDO, 5.4V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B55	-	LN1193B552DR	LVR-IC	LDO, 5.5V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B56	-	LN1193B562DR	LVR-IC	LDO, 5.6V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B57	-	LN1193B572DR	LVR-IC	LDO, 5.7V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B58	-	LN1193B582DR	LVR-IC	LDO, 5.8V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B59	-	LN1193B592DR	LVR-IC	LDO, 5.9V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B5A	-	LN1193B50ADR	LVR-IC	LDO, 5.05V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B5B	-	LN1193B51ADR	LVR-IC	LDO, 5.15V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B5C	-	LN1193B52ADR	LVR-IC	LDO, 5.25V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B5D	-	LN1193B53ADR	LVR-IC	LDO, 5.35V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B5E	-	LN1193B54ADR	LVR-IC	LDO, 5.45V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B5F	-	LN1193B55ADR	LVR-IC	LDO, 5.55V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B5H	-	LN1193B56ADR	LVR-IC	LDO, 5.65V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B5K	-	LN1193B57ADR	LVR-IC	LDO, 5.75V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B5L	-	LN1193B58ADR	LVR-IC	LDO, 5.85V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B5M	-	LN1193B59ADR	LVR-IC	LDO, 5.95V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93B60	-	LN1193B602DR	LVR-IC	LDO, 6.0V±2%, 300mA, +CE	DFN-6	74ub	VR7	9b	Nln
93C	-	XC6223H221GR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93C	-	XCL209A3C3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.25V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
93C10	-	LN1193C102DR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C11	-	LN1193C112DR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C12	-	LN1193C122DR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C13	-	LN1193C132DR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C14	-	LN1193C142DR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C15	-	LN1193C152DR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C16	-	LN1193C162DR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C17	-	LN1193C172DR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C18	-	LN1193C182DR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C19	-	LN1193C192DR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C1A	-	LN1193C10ADR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C1B	-	LN1193C11ADR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C1C	-	LN1193C12ADR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
93C1D	-	LN1193C13ADR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C1E	-	LN1193C14ADR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C1F	-	LN1193C15ADR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C1H	-	LN1193C16ADR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C1K	-	LN1193C17ADR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C1L	-	LN1193C18ADR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C1M	-	LN1193C19ADR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C20	-	LN1193C202DR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C21	-	LN1193C212DR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C22	-	LN1193C222DR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C23	-	LN1193C232DR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C24	-	LN1193C242DR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C25	-	LN1193C252DR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C26	-	LN1193C262DR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C27	-	LN1193C272DR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C28	-	LN1193C282DR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C29	-	LN1193C292DR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C2A	-	LN1193C20ADR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C2B	-	LN1193C21ADR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C2C	-	LN1193C22ADR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C2D	-	LN1193C23ADR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C2E	-	LN1193C24ADR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C2F	-	LN1193C25ADR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C2H	-	LN1193C26ADR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C2K	-	LN1193C27ADR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C2L	-	LN1193C28ADR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C2M	-	LN1193C29ADR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C30	-	LN1193C302DR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C31	-	LN1193C312DR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C32	-	LN1193C322DR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C33	-	LN1193C332DR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C34	-	LN1193C342DR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C35	-	LN1193C352DR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C36	-	LN1193C362DR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C37	-	LN1193C372DR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C38	-	LN1193C382DR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C39	-	LN1193C392DR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C3A	-	LN1193C30ADR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C3B	-	LN1193C31ADR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C3C	-	LN1193C32ADR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C3D	-	LN1193C33ADR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C3E	-	LN1193C34ADR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C3F	-	LN1193C35ADR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C3H	-	LN1193C36ADR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C3K	-	LN1193C37ADR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C3L	-	LN1193C38ADR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C3M	-	LN1193C39ADR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C40	-	LN1193C402DR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C41	-	LN1193C412DR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C42	-	LN1193C422DR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C43	-	LN1193C432DR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C44	-	LN1193C442DR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C45	-	LN1193C452DR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C46	-	LN1193C462DR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C47	-	LN1193C472DR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C48	-	LN1193C482DR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C49	-	LN1193C492DR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C4A	-	LN1193C40ADR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C4B	-	LN1193C41ADR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C4C	-	LN1193C42ADR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C4D	-	LN1193C43ADR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C4E	-	LN1193C44ADR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C4F	-	LN1193C45ADR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C4H	-	LN1193C46ADR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C4K	-	LN1193C47ADR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C4L	-	LN1193C48ADR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C4M	-	LN1193C49ADR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C50	-	LN1193C502DR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C51	-	LN1193C512DR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C52	-	LN1193C522DR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
93C53	-	LN1193C532DR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C54	-	LN1193C542DR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C55	-	LN1193C552DR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C56	-	LN1193C562DR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C57	-	LN1193C572DR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C58	-	LN1193C582DR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C59	-	LN1193C592DR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C5A	-	LN1193C50ADR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C5B	-	LN1193C51ADR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C5C	-	LN1193C52ADR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C5D	-	LN1193C53ADR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C5E	-	LN1193C54ADR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C5F	-	LN1193C55ADR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C5H	-	LN1193C56ADR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C5K	-	LN1193C57ADR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C5L	-	LN1193C58ADR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C5M	-	LN1193C59ADR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93C60	-	LN1193C602DR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE, PUR	DFN-6	74ub	VR7	9b	Nln
93D	-	XC6223H231GR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93D	-	XCL209A3D3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.35V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
93D10	-	LN1193D102DR	LVR-IC	LDO, 1.0V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D11	-	LN1193D112DR	LVR-IC	LDO, 1.1V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D12	-	LN1193D122DR	LVR-IC	LDO, 1.2V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D13	-	LN1193D132DR	LVR-IC	LDO, 1.3V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D14	-	LN1193D142DR	LVR-IC	LDO, 1.4V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D15	-	LN1193D152DR	LVR-IC	LDO, 1.5V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D16	-	LN1193D162DR	LVR-IC	LDO, 1.6V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D17	-	LN1193D172DR	LVR-IC	LDO, 1.7V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D18	-	LN1193D182DR	LVR-IC	LDO, 1.8V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D19	-	LN1193D192DR	LVR-IC	LDO, 1.9V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D1A	-	LN1193D10ADR	LVR-IC	LDO, 1.05V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D1B	-	LN1193D11ADR	LVR-IC	LDO, 1.15V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D1C	-	LN1193D12ADR	LVR-IC	LDO, 1.25V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D1D	-	LN1193D13ADR	LVR-IC	LDO, 1.35V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D1E	-	LN1193D14ADR	LVR-IC	LDO, 1.45V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D1F	-	LN1193D15ADR	LVR-IC	LDO, 1.55V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D1H	-	LN1193D16ADR	LVR-IC	LDO, 1.65V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D1K	-	LN1193D17ADR	LVR-IC	LDO, 1.75V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D1L	-	LN1193D18ADR	LVR-IC	LDO, 1.85V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D1M	-	LN1193D19ADR	LVR-IC	LDO, 1.95V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D20	-	LN1193D202DR	LVR-IC	LDO, 2.0V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D21	-	LN1193D212DR	LVR-IC	LDO, 2.1V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D22	-	LN1193D222DR	LVR-IC	LDO, 2.2V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D23	-	LN1193D232DR	LVR-IC	LDO, 2.3V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D24	-	LN1193D242DR	LVR-IC	LDO, 2.4V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D25	-	LN1193D252DR	LVR-IC	LDO, 2.5V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D26	-	LN1193D262DR	LVR-IC	LDO, 2.6V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D27	-	LN1193D272DR	LVR-IC	LDO, 2.7V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D28	-	LN1193D282DR	LVR-IC	LDO, 2.8V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D29	-	LN1193D292DR	LVR-IC	LDO, 2.9V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D2A	-	LN1193D20ADR	LVR-IC	LDO, 2.05V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D2B	-	LN1193D21ADR	LVR-IC	LDO, 2.15V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D2C	-	LN1193D22ADR	LVR-IC	LDO, 2.25V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D2D	-	LN1193D23ADR	LVR-IC	LDO, 2.35V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D2E	-	LN1193D24ADR	LVR-IC	LDO, 2.45V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D2F	-	LN1193D25ADR	LVR-IC	LDO, 2.55V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D2H	-	LN1193D26ADR	LVR-IC	LDO, 2.65V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D2K	-	LN1193D27ADR	LVR-IC	LDO, 2.75V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D2L	-	LN1193D28ADR	LVR-IC	LDO, 2.85V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D2M	-	LN1193D29ADR	LVR-IC	LDO, 2.95V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D30	-	LN1193D302DR	LVR-IC	LDO, 3.0V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D31	-	LN1193D312DR	LVR-IC	LDO, 3.1V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D32	-	LN1193D322DR	LVR-IC	LDO, 3.2V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D33	-	LN1193D332DR	LVR-IC	LDO, 3.3V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D34	-	LN1193D342DR	LVR-IC	LDO, 3.4V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D35	-	LN1193D352DR	LVR-IC	LDO, 3.5V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D36	-	LN1193D362DR	LVR-IC	LDO, 3.6V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D37	-	LN1193D372DR	LVR-IC	LDO, 3.7V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D38	-	LN1193D382DR	LVR-IC	LDO, 3.8V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D39	-	LN1193D392DR	LVR-IC	LDO, 3.9V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
93D3A	-	LN1193D30ADR	LVR-IC	LDO, 3.05V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D3B	-	LN1193D31ADR	LVR-IC	LDO, 3.15V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D3C	-	LN1193D32ADR	LVR-IC	LDO, 3.25V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D3D	-	LN1193D33ADR	LVR-IC	LDO, 3.35V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D3E	-	LN1193D34ADR	LVR-IC	LDO, 3.45V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D3F	-	LN1193D35ADR	LVR-IC	LDO, 3.55V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D3H	-	LN1193D36ADR	LVR-IC	LDO, 3.65V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D3K	-	LN1193D37ADR	LVR-IC	LDO, 3.75V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D3L	-	LN1193D38ADR	LVR-IC	LDO, 3.85V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D3M	-	LN1193D39ADR	LVR-IC	LDO, 3.95V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D40	-	LN1193D402DR	LVR-IC	LDO, 4.0V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D41	-	LN1193D412DR	LVR-IC	LDO, 4.1V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D42	-	LN1193D422DR	LVR-IC	LDO, 4.2V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D43	-	LN1193D432DR	LVR-IC	LDO, 4.3V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D44	-	LN1193D442DR	LVR-IC	LDO, 4.4V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D45	-	LN1193D452DR	LVR-IC	LDO, 4.5V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D46	-	LN1193D462DR	LVR-IC	LDO, 4.6V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D47	-	LN1193D472DR	LVR-IC	LDO, 4.7V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D48	-	LN1193D482DR	LVR-IC	LDO, 4.8V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D49	-	LN1193D492DR	LVR-IC	LDO, 4.9V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D4A	-	LN1193D40ADR	LVR-IC	LDO, 4.05V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D4B	-	LN1193D41ADR	LVR-IC	LDO, 4.15V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D4C	-	LN1193D42ADR	LVR-IC	LDO, 4.25V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D4D	-	LN1193D43ADR	LVR-IC	LDO, 4.35V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D4E	-	LN1193D44ADR	LVR-IC	LDO, 4.45V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D4F	-	LN1193D45ADR	LVR-IC	LDO, 4.55V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D4H	-	LN1193D46ADR	LVR-IC	LDO, 4.65V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D4K	-	LN1193D47ADR	LVR-IC	LDO, 4.75V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D4L	-	LN1193D48ADR	LVR-IC	LDO, 4.85V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D4M	-	LN1193D49ADR	LVR-IC	LDO, 4.95V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D50	-	LN1193D502DR	LVR-IC	LDO, 5.0V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D51	-	LN1193D512DR	LVR-IC	LDO, 5.1V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D52	-	LN1193D522DR	LVR-IC	LDO, 5.2V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D53	-	LN1193D532DR	LVR-IC	LDO, 5.3V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D54	-	LN1193D542DR	LVR-IC	LDO, 5.4V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D55	-	LN1193D552DR	LVR-IC	LDO, 5.5V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D56	-	LN1193D562DR	LVR-IC	LDO, 5.6V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D57	-	LN1193D572DR	LVR-IC	LDO, 5.7V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D58	-	LN1193D582DR	LVR-IC	LDO, 5.8V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D59	-	LN1193D592DR	LVR-IC	LDO, 5.9V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D5A	-	LN1193D50ADR	LVR-IC	LDO, 5.05V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D5B	-	LN1193D51ADR	LVR-IC	LDO, 5.15V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D5C	-	LN1193D52ADR	LVR-IC	LDO, 5.25V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D5D	-	LN1193D53ADR	LVR-IC	LDO, 5.35V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D5E	-	LN1193D54ADR	LVR-IC	LDO, 5.45V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D5F	-	LN1193D55ADR	LVR-IC	LDO, 5.55V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D5H	-	LN1193D56ADR	LVR-IC	LDO, 5.65V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D5K	-	LN1193D57ADR	LVR-IC	LDO, 5.75V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D5L	-	LN1193D58ADR	LVR-IC	LDO, 5.85V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D5M	-	LN1193D59ADR	LVR-IC	LDO, 5.95V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93D60	-	LN1193D602DR	LVR-IC	LDO, 6.0V±2%, 300mA, -CE	DFN-6	74ub	VR7	9b	Nln
93E	-	XC6223H241GR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93E	-	XCL209A3E3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.45V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
93F	-	XC6223H251GR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93F	-	XCL209A3F3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.55V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
93H	-	XC6223H261GR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93H	-	XCL209A3H3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.65V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
93K	-	XC6223H271GR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93K	-	XCL209A3K3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.75V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
93L	-	XC6223H281GR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93L	-	XCL209A3L3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.85V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
93M	-	XC6223H291GR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93M	-	XCL209A3M3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.95V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
93N	-	XC6223H301GR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93P	-	XC6223H311GR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93R	-	XC6223H321GR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93S	-	XC6223H331GR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93T	-	XC6223H341GR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93U	-	XC6223H351GR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93V	-	XC6223H361GR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
93X	-	XC6223H371GR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93Y	-	XC6223H381GR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
93Z	-	XC6223H391GR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
94	-	RP110L351D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
94	-	XC6223B14B9R-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
940	-	XC6223H401GR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
940	-	XCL209A403DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 4.0V±2%, 400mA, +CE	USP-10B03	107dc9	DC23	9a	Tor
94C	-	MIC5371-1.2/1.0YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/1.0V±2%, 150mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
94Dx	-	G9184-120A31U	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	DFN-6	57gy	VR7	9m	Gmt
95	-	RP110L361D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
95	-	TS4995EIJT	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), select shutdown	BGA-9	39	-	9a	Ste
95	-	XC6223B15B9R-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
952	-	XC6223H12BGR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
953	-	XC6223H13BGR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
954	-	XC6223H14BGR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
955	-	XC6223H15BGR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
956	-	XC6223H16BGR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
957	-	XC6223H17BGR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
958	-	XC6223H18BGR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
959	-	XC6223H19BGR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95A	-	XC6223H20BGR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95B	-	XC6223H21BGR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95C	-	XC6223H22BGR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95D	-	XC6223H23BGR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95E	-	XC6223H24BGR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95F	-	XC6223H25BGR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95H	-	XC6223H26BGR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95K	-	XC6223H27BGR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95L	-	XC6223H28BGR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95M	-	XC6223H29BGR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95N	-	XC6223H30BGR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95P	-	XC6223H31BGR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95R	-	XC6223H32BGR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95S	-	XC6223H33BGR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95T	-	XC6223H34BGR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95U	-	XC6223H35BGR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95V	-	XC6223H36BGR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95X	-	XC6223H37BGR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95Y	-	XC6223H38BGR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
95Z	-	XC6223H39BGR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL, PDR, ICP	USP-4	45vm	VR4	9a	Tor
96	-	XC6223B16B9R-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
97	-	XC6223B17B9R-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
98	-	XC6223B18B9R-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
99	-	XC6223B19B9R-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9A	-	BZT52C5V6LP	Z-diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 250mW	DFN1006-2	13d	-	2b	Di
9A	-	BZT52C5V6LP	Z-diode	5.6V±5%, Izt=5mA, Zzt=40Ω, 250mW	DFN1006-2	13d	-	2a	Di
9A	-	RP103K241B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
9A	-	RP111L071D	LVR-IC	LDO, 0.7V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9A	-	RP202K081D	LVR-IC	LDO, 0.8V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9A	-	XC6223B20B9R-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9A0	-	XC6601A071ER	LVR-IC	0.7V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9A0	-	XCL209B093DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 0.9V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9A016	-	XC6117A016ER	Vdet-IC	1.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A017	-	XC6117A017ER	Vdet-IC	1.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A018	-	XC6117A018ER	Vdet-IC	1.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A019	-	XC6117A019ER	Vdet-IC	1.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A020	-	XC6117A020ER	Vdet-IC	2.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A021	-	XC6117A021ER	Vdet-IC	2.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A022	-	XC6117A022ER	Vdet-IC	2.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A023	-	XC6117A023ER	Vdet-IC	2.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A024	-	XC6117A024ER	Vdet-IC	2.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A025	-	XC6117A025ER	Vdet-IC	2.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A026	-	XC6117A026ER	Vdet-IC	2.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A027	-	XC6117A027ER	Vdet-IC	2.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A028	-	XC6117A028ER	Vdet-IC	2.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A029	-	XC6117A029ER	Vdet-IC	2.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A030	-	XC6117A030ER	Vdet-IC	3.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A031	-	XC6117A031ER	Vdet-IC	3.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A032	-	XC6117A032ER	Vdet-IC	3.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A033	-	XC6117A033ER	Vdet-IC	3.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9A034	-	XC6117A034ER	Vdet-IC	3.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A035	-	XC6117A035ER	Vdet-IC	3.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A036	-	XC6117A036ER	Vdet-IC	3.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A037	-	XC6117A037ER	Vdet-IC	3.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A038	-	XC6117A038ER	Vdet-IC	3.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A039	-	XC6117A039ER	Vdet-IC	3.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A040	-	XC6117A040ER	Vdet-IC	4.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A041	-	XC6117A041ER	Vdet-IC	4.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A042	-	XC6117A042ER	Vdet-IC	4.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A043	-	XC6117A043ER	Vdet-IC	4.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A044	-	XC6117A044ER	Vdet-IC	4.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A045	-	XC6117A045ER	Vdet-IC	4.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A046	-	XC6117A046ER	Vdet-IC	4.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A047	-	XC6117A047ER	Vdet-IC	4.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A048	-	XC6117A048ER	Vdet-IC	4.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A049	-	XC6117A049ER	Vdet-IC	4.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A050	-	XC6117A050ER	Vdet-IC	5.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=3.13ms	USP-6C	49xs	VD22	9b	Tor
9A1	-	XC6601A07BER	LVR-IC	0.75V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9A116	-	XC6112A116ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A117	-	XC6112A117ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A118	-	XC6112A118ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A119	-	XC6112A119ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A120	-	XC6112A120ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A121	-	XC6112A121ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A122	-	XC6112A122ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A123	-	XC6112A123ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A124	-	XC6112A124ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A125	-	XC6112A125ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A126	-	XC6112A126ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A127	-	XC6112A127ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A128	-	XC6112A128ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A129	-	XC6112A129ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A130	-	XC6112A130ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A131	-	XC6112A131ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A132	-	XC6112A132ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A133	-	XC6112A133ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A134	-	XC6112A134ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A135	-	XC6112A135ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A136	-	XC6112A136ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A137	-	XC6112A137ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A138	-	XC6112A138ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A139	-	XC6112A139ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A140	-	XC6112A140ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A141	-	XC6112A141ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A142	-	XC6112A142ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A143	-	XC6112A143ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A144	-	XC6112A144ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A145	-	XC6112A145ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A146	-	XC6112A146ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A147	-	XC6112A147ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A148	-	XC6112A148ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A149	-	XC6112A149ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A150	-	XC6112A150ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A2	-	XC6601A081ER	LVR-IC	0.8V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9A216	-	XC6112A216ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A217	-	XC6112A217ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A218	-	XC6112A218ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A219	-	XC6112A219ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A220	-	XC6112A220ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A221	-	XC6112A221ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A222	-	XC6112A222ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A223	-	XC6112A223ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A224	-	XC6112A224ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A225	-	XC6112A225ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A226	-	XC6112A226ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A227	-	XC6112A227ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A228	-	XC6112A228ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A229	-	XC6112A229ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A230	-	XC6112A230ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A231	-	XC6112A231ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9A232	-	XC6112A232ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A233	-	XC6112A233ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A234	-	XC6112A234ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A235	-	XC6112A235ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A236	-	XC6112A236ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A237	-	XC6112A237ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A238	-	XC6112A238ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A239	-	XC6112A239ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A240	-	XC6112A240ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A241	-	XC6112A241ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A242	-	XC6112A242ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A243	-	XC6112A243ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A244	-	XC6112A244ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A245	-	XC6112A245ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A246	-	XC6112A246ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A247	-	XC6112A247ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A248	-	XC6112A248ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A249	-	XC6112A249ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A250	-	XC6112A250ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A3	-	XC6601A08BER	LVR-IC	0.85V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9A316	-	XC6112A316ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A317	-	XC6112A317ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A318	-	XC6112A318ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A319	-	XC6112A319ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A320	-	XC6112A320ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A321	-	XC6112A321ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A322	-	XC6112A322ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A323	-	XC6112A323ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A324	-	XC6112A324ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A325	-	XC6112A325ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A326	-	XC6112A326ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A327	-	XC6112A327ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A328	-	XC6112A328ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A329	-	XC6112A329ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A330	-	XC6112A330ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A331	-	XC6112A331ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A332	-	XC6112A332ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A333	-	XC6112A333ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A334	-	XC6112A334ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A335	-	XC6112A335ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A336	-	XC6112A336ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A337	-	XC6112A337ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A338	-	XC6112A338ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A339	-	XC6112A339ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A340	-	XC6112A340ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A341	-	XC6112A341ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A342	-	XC6112A342ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A343	-	XC6112A343ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A344	-	XC6112A344ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A345	-	XC6112A345ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A346	-	XC6112A346ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A347	-	XC6112A347ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A348	-	XC6112A348ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A349	-	XC6112A349ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A350	-	XC6112A350ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A4	-	XC6601A091ER	LVR-IC	0.9V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9A416	-	XC6112A416ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A417	-	XC6112A417ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A418	-	XC6112A418ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A419	-	XC6112A419ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A420	-	XC6112A420ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A421	-	XC6112A421ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A422	-	XC6112A422ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A423	-	XC6112A423ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A424	-	XC6112A424ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A425	-	XC6112A425ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A426	-	XC6112A426ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A427	-	XC6112A427ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A428	-	XC6112A428ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A429	-	XC6112A429ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9A430	-	XC6112A430ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A431	-	XC6112A431ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A432	-	XC6112A432ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A433	-	XC6112A433ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A434	-	XC6112A434ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A435	-	XC6112A435ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A436	-	XC6112A436ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A437	-	XC6112A437ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A438	-	XC6112A438ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A439	-	XC6112A439ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A440	-	XC6112A440ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A441	-	XC6112A441ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A442	-	XC6112A442ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A443	-	XC6112A443ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A444	-	XC6112A444ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A445	-	XC6112A445ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A446	-	XC6112A446ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A447	-	XC6112A447ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A448	-	XC6112A448ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A449	-	XC6112A449ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A450	-	XC6112A450ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A5	-	XC6601A09BER	LVR-IC	0.95V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9A516	-	XC6112A516ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A517	-	XC6112A517ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A518	-	XC6112A518ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A519	-	XC6112A519ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A520	-	XC6112A520ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A521	-	XC6112A521ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A522	-	XC6112A522ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A523	-	XC6112A523ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A524	-	XC6112A524ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A525	-	XC6112A525ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A526	-	XC6112A526ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A527	-	XC6112A527ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A528	-	XC6112A528ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A529	-	XC6112A529ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A530	-	XC6112A530ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A531	-	XC6112A531ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A532	-	XC6112A532ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A533	-	XC6112A533ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A534	-	XC6112A534ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A535	-	XC6112A535ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A536	-	XC6112A536ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A537	-	XC6112A537ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A538	-	XC6112A538ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A539	-	XC6112A539ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A540	-	XC6112A540ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A541	-	XC6112A541ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A542	-	XC6112A542ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A543	-	XC6112A543ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A544	-	XC6112A544ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A545	-	XC6112A545ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A546	-	XC6112A546ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A547	-	XC6112A547ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A548	-	XC6112A548ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A549	-	XC6112A549ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A550	-	XC6112A550ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A6	-	XC6601A101ER	LVR-IC	1.0V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9A616	-	XC6112A616ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A617	-	XC6112A617ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A618	-	XC6112A618ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A619	-	XC6112A619ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A620	-	XC6112A620ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A621	-	XC6112A621ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A622	-	XC6112A622ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A623	-	XC6112A623ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A624	-	XC6112A624ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A625	-	XC6112A625ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A626	-	XC6112A626ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A627	-	XC6112A627ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9A628	-	XC6112A628ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A629	-	XC6112A629ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A630	-	XC6112A630ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A631	-	XC6112A631ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A632	-	XC6112A632ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A633	-	XC6112A633ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A634	-	XC6112A634ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A635	-	XC6112A635ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A636	-	XC6112A636ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A637	-	XC6112A637ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A638	-	XC6112A638ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A639	-	XC6112A639ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A640	-	XC6112A640ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A641	-	XC6112A641ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A642	-	XC6112A642ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A643	-	XC6112A643ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A644	-	XC6112A644ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A645	-	XC6112A645ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A646	-	XC6112A646ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A647	-	XC6112A647ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A648	-	XC6112A648ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A649	-	XC6112A649ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A650	-	XC6112A650ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD16	9b	Tor
9A7	-	XC6601A10BER	LVR-IC	1.05V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9A8	-	XC6601A111ER	LVR-IC	1.1V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9A8	-	XCL209B083DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 0.8V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9A9	-	XC6601A11BER	LVR-IC	1.15V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9AA	-	XC6601A121ER	LVR-IC	1.2V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9AB	-	XC6601A12BER	LVR-IC	1.25V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9AC	-	XC6601A131ER	LVR-IC	1.3V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9AD	-	XC6601A13BER	LVR-IC	1.35V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9AE	-	XC6601A141ER	LVR-IC	1.4V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9AF	-	XC6601A14BER	LVR-IC	1.45V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9AH	-	XC6601A151ER	LVR-IC	1.5V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9AK	-	XC6601A15BER	LVR-IC	1.55V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9AL	-	XC6601A161ER	LVR-IC	1.6V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9AL	-	XCL209B0L3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 0.85V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9AM	-	XC6601A16BER	LVR-IC	1.65V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9AM	-	XCL209B0M3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 0.95V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9AN	-	XC6601A171ER	LVR-IC	1.7V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9AP	-	XC6601A17BER	LVR-IC	1.75V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9AR	-	XC6601A181ER	LVR-IC	1.8V±20mV, 400mA, +CE, PDR, UVLO	USP-6C	49gm	VR11	9a	Tor
9B	-	BZT52C6V2LP	Z-diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 250mW	DFN1006-2	13d	-	2a	Di
9B	-	BZT52C6V2LP	Z-diode	6.2V±5%, Izt=5mA, Zzt=10Ω, 250mW	DFN1006-2	13d	-	2b	Di
9B	-	RP111L071D5	LVR-IC	LDO, 0.75V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9B	-	RP202K091D	LVR-IC	LDO, 0.9V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9B	-	XC6221A1217R	LVR-IC	LDO, 1.2V±20mV, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9B	-	XC6223B21B9R-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9B0	-	XC6601B071ER	LVR-IC	0.7V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9B0	-	XCL209B103DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.0V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9B016	-	XC6117B016ER	Vdet-IC	1.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B017	-	XC6117B017ER	Vdet-IC	1.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B018	-	XC6117B018ER	Vdet-IC	1.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B019	-	XC6117B019ER	Vdet-IC	1.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B020	-	XC6117B020ER	Vdet-IC	2.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B021	-	XC6117B021ER	Vdet-IC	2.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B022	-	XC6117B022ER	Vdet-IC	2.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B023	-	XC6117B023ER	Vdet-IC	2.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B024	-	XC6117B024ER	Vdet-IC	2.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B025	-	XC6117B025ER	Vdet-IC	2.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B026	-	XC6117B026ER	Vdet-IC	2.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B027	-	XC6117B027ER	Vdet-IC	2.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B028	-	XC6117B028ER	Vdet-IC	2.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B029	-	XC6117B029ER	Vdet-IC	2.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B030	-	XC6117B030ER	Vdet-IC	3.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B031	-	XC6117B031ER	Vdet-IC	3.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B032	-	XC6117B032ER	Vdet-IC	3.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B033	-	XC6117B033ER	Vdet-IC	3.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B034	-	XC6117B034ER	Vdet-IC	3.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B035	-	XC6117B035ER	Vdet-IC	3.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9B036	-	XC6117B036ER	Vdet-IC	3.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B037	-	XC6117B037ER	Vdet-IC	3.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B038	-	XC6117B038ER	Vdet-IC	3.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B039	-	XC6117B039ER	Vdet-IC	3.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B040	-	XC6117B040ER	Vdet-IC	4.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B041	-	XC6117B041ER	Vdet-IC	4.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B042	-	XC6117B042ER	Vdet-IC	4.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B043	-	XC6117B043ER	Vdet-IC	4.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B044	-	XC6117B044ER	Vdet-IC	4.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B045	-	XC6117B045ER	Vdet-IC	4.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B046	-	XC6117B046ER	Vdet-IC	4.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B047	-	XC6117B047ER	Vdet-IC	4.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B048	-	XC6117B048ER	Vdet-IC	4.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B049	-	XC6117B049ER	Vdet-IC	4.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B050	-	XC6117B050ER	Vdet-IC	5.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=25ms	USP-6C	49xs	VD22	9b	Tor
9B1	-	XC6601B07BER	LVR-IC	0.75V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9B1	-	XCL209B113DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.1V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9B2	-	XC6601B081ER	LVR-IC	0.8V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9B2	-	XCL209B123DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.2V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9B216	-	XC6112B216ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B217	-	XC6112B217ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B218	-	XC6112B218ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B219	-	XC6112B219ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B220	-	XC6112B220ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B221	-	XC6112B221ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B222	-	XC6112B222ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B223	-	XC6112B223ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B224	-	XC6112B224ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B225	-	XC6112B225ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B226	-	XC6112B226ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B227	-	XC6112B227ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B228	-	XC6112B228ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B229	-	XC6112B229ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B230	-	XC6112B230ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B231	-	XC6112B231ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B232	-	XC6112B232ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B233	-	XC6112B233ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B234	-	XC6112B234ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B235	-	XC6112B235ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B236	-	XC6112B236ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B237	-	XC6112B237ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B238	-	XC6112B238ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B239	-	XC6112B239ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B240	-	XC6112B240ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B241	-	XC6112B241ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B242	-	XC6112B242ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B243	-	XC6112B243ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B244	-	XC6112B244ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B245	-	XC6112B245ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B246	-	XC6112B246ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B247	-	XC6112B247ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B248	-	XC6112B248ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B249	-	XC6112B249ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B250	-	XC6112B250ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B3	-	XC6601B08BER	LVR-IC	0.85V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9B3	-	XCL209B133DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.3V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9B316	-	XC6112B316ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B317	-	XC6112B317ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B318	-	XC6112B318ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B319	-	XC6112B319ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B320	-	XC6112B320ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B321	-	XC6112B321ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B322	-	XC6112B322ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B323	-	XC6112B323ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B324	-	XC6112B324ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B325	-	XC6112B325ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B326	-	XC6112B326ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B327	-	XC6112B327ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B328	-	XC6112B328ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B329	-	XC6112B329ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9B330	-	XC6112B330ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B331	-	XC6112B331ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B332	-	XC6112B332ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B333	-	XC6112B333ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B334	-	XC6112B334ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B335	-	XC6112B335ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B336	-	XC6112B336ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B337	-	XC6112B337ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B338	-	XC6112B338ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B339	-	XC6112B339ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B340	-	XC6112B340ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B341	-	XC6112B341ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B342	-	XC6112B342ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B343	-	XC6112B343ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B344	-	XC6112B344ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B345	-	XC6112B345ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B346	-	XC6112B346ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B347	-	XC6112B347ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B348	-	XC6112B348ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B349	-	XC6112B349ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B350	-	XC6112B350ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B4	-	XC6601B091ER	LVR-IC	0.9V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9B4	-	XCL209B143DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.4V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9B416	-	XC6112B416ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B417	-	XC6112B417ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B418	-	XC6112B418ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B419	-	XC6112B419ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B420	-	XC6112B420ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B421	-	XC6112B421ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B422	-	XC6112B422ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B423	-	XC6112B423ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B424	-	XC6112B424ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B425	-	XC6112B425ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B426	-	XC6112B426ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B427	-	XC6112B427ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B428	-	XC6112B428ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B429	-	XC6112B429ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B430	-	XC6112B430ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B431	-	XC6112B431ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B432	-	XC6112B432ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B433	-	XC6112B433ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B434	-	XC6112B434ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B435	-	XC6112B435ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B436	-	XC6112B436ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B437	-	XC6112B437ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B438	-	XC6112B438ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B439	-	XC6112B439ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B440	-	XC6112B440ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B441	-	XC6112B441ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B442	-	XC6112B442ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B443	-	XC6112B443ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B444	-	XC6112B444ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B445	-	XC6112B445ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B446	-	XC6112B446ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B447	-	XC6112B447ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B448	-	XC6112B448ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B449	-	XC6112B449ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B450	-	XC6112B450ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B5	-	XC6601B09BER	LVR-IC	0.95V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9B5	-	XCL209B153DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.5V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9B516	-	XC6112B516ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B517	-	XC6112B517ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B518	-	XC6112B518ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B519	-	XC6112B519ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B520	-	XC6112B520ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B521	-	XC6112B521ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B522	-	XC6112B522ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B523	-	XC6112B523ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B524	-	XC6112B524ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B525	-	XC6112B525ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9B526	-	XC6112B526ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B527	-	XC6112B527ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B528	-	XC6112B528ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B529	-	XC6112B529ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B530	-	XC6112B530ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B531	-	XC6112B531ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B532	-	XC6112B532ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B533	-	XC6112B533ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B534	-	XC6112B534ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B535	-	XC6112B535ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B536	-	XC6112B536ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B537	-	XC6112B537ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B538	-	XC6112B538ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B539	-	XC6112B539ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B540	-	XC6112B540ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B541	-	XC6112B541ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B542	-	XC6112B542ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B543	-	XC6112B543ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B544	-	XC6112B544ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B545	-	XC6112B545ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B546	-	XC6112B546ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B547	-	XC6112B547ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B548	-	XC6112B548ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B549	-	XC6112B549ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B550	-	XC6112B550ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B6	-	XC6601B101ER	LVR-IC	1.0V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9B6	-	XCL209B163DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.6V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9B616	-	XC6112B616ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B617	-	XC6112B617ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B618	-	XC6112B618ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B619	-	XC6112B619ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B620	-	XC6112B620ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B621	-	XC6112B621ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B622	-	XC6112B622ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B623	-	XC6112B623ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B624	-	XC6112B624ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B625	-	XC6112B625ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B626	-	XC6112B626ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B627	-	XC6112B627ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B628	-	XC6112B628ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B629	-	XC6112B629ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B630	-	XC6112B630ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B631	-	XC6112B631ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B632	-	XC6112B632ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B633	-	XC6112B633ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B634	-	XC6112B634ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B635	-	XC6112B635ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B636	-	XC6112B636ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B637	-	XC6112B637ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B638	-	XC6112B638ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B639	-	XC6112B639ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B640	-	XC6112B640ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B641	-	XC6112B641ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B642	-	XC6112B642ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B643	-	XC6112B643ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B644	-	XC6112B644ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B645	-	XC6112B645ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B646	-	XC6112B646ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B647	-	XC6112B647ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B648	-	XC6112B648ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B649	-	XC6112B649ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B650	-	XC6112B650ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD16	9b	Tor
9B7	-	XC6601B10BER	LVR-IC	1.05V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9B7	-	XCL209B173DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.7V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9B8	-	XC6601B111ER	LVR-IC	1.1V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9B8	-	XCL209B183DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.8V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9B9	-	XC6601B11BER	LVR-IC	1.15V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9B9	-	XCL209B193DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.9V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9BA	-	XC6601B121ER	LVR-IC	1.2V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9BA	-	XCL209B1A3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.05V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9BB	-	XC6601B12BER	LVR-IC	1.25V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9BB	-	XCL209B1B3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.15V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9BC	-	XC6601B131ER	LVR-IC	1.3V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9BC	-	XCL209B1C3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.25V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9BD	-	XC6601B13BER	LVR-IC	1.35V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9BD	-	XCL209B1D3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.35V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9BE	-	XC6601B141ER	LVR-IC	1.4V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9BE	-	XCL209B1E3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.45V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9BF	-	XC6601B14BER	LVR-IC	1.45V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9BF	-	XCL209B1F3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.55V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9BH	-	XC6601B151ER	LVR-IC	1.5V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9BH	-	XCL209B1H3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.65V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9BK	-	XC6601B15BER	LVR-IC	1.55V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9BK	-	XCL209B1K3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.75V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9BL	-	XC6601B161ER	LVR-IC	1.6V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9BL	-	XCL209B1L3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.85V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9BM	-	XC6601B16BER	LVR-IC	1.65V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9BM	-	XCL209B1M3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 1.95V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9BN	-	XC6601B171ER	LVR-IC	1.7V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9BP	-	XC6601B17BER	LVR-IC	1.75V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9BR	-	XC6601B181ER	LVR-IC	1.8V±20mV, 400mA, +CE, UVLO	USP-6C	49gm	VR11	9a	Tor
9C	-	BZT52C6V8LP	Z-diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 250mW	DFN1006-2	13d	-	2a	Di
9C	-	BZT52C6V8LP	Z-diode	6.8V±5%, Izt=5mA, Zzt=15Ω, 250mW	DFN1006-2	13d	-	2b	Di
9C	-	RP111L081D	LVR-IC	LDO, 0.8V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9C	-	RP202K101D	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9C	-	XC6221A1317R	LVR-IC	LDO, 1.3V±20mV, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9C	-	XC6223B22B9R-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9C0	-	XCL209B203DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.0V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9C016	-	XC6117C016ER	Vdet-IC	1.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C017	-	XC6117C017ER	Vdet-IC	1.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C018	-	XC6117C018ER	Vdet-IC	1.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C019	-	XC6117C019ER	Vdet-IC	1.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C020	-	XC6117C020ER	Vdet-IC	2.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C021	-	XC6117C021ER	Vdet-IC	2.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C022	-	XC6117C022ER	Vdet-IC	2.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C023	-	XC6117C023ER	Vdet-IC	2.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C024	-	XC6117C024ER	Vdet-IC	2.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C025	-	XC6117C025ER	Vdet-IC	2.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C026	-	XC6117C026ER	Vdet-IC	2.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C027	-	XC6117C027ER	Vdet-IC	2.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C028	-	XC6117C028ER	Vdet-IC	2.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C029	-	XC6117C029ER	Vdet-IC	2.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C030	-	XC6117C030ER	Vdet-IC	3.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C031	-	XC6117C031ER	Vdet-IC	3.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C032	-	XC6117C032ER	Vdet-IC	3.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C033	-	XC6117C033ER	Vdet-IC	3.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C034	-	XC6117C034ER	Vdet-IC	3.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C035	-	XC6117C035ER	Vdet-IC	3.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C036	-	XC6117C036ER	Vdet-IC	3.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C037	-	XC6117C037ER	Vdet-IC	3.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C038	-	XC6117C038ER	Vdet-IC	3.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C039	-	XC6117C039ER	Vdet-IC	3.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C040	-	XC6117C040ER	Vdet-IC	4.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C041	-	XC6117C041ER	Vdet-IC	4.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C042	-	XC6117C042ER	Vdet-IC	4.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C043	-	XC6117C043ER	Vdet-IC	4.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C044	-	XC6117C044ER	Vdet-IC	4.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C045	-	XC6117C045ER	Vdet-IC	4.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C046	-	XC6117C046ER	Vdet-IC	4.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C047	-	XC6117C047ER	Vdet-IC	4.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C048	-	XC6117C048ER	Vdet-IC	4.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C049	-	XC6117C049ER	Vdet-IC	4.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C050	-	XC6117C050ER	Vdet-IC	5.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=50ms	USP-6C	49xs	VD22	9b	Tor
9C1	-	XCL209B213DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.1V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9C2	-	XC6223A121GR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9C2	-	XCL209B223DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.2V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9C216	-	XC6112C216ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C217	-	XC6112C217ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C218	-	XC6112C218ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C219	-	XC6112C219ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9C220	-	XC6112C220ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C221	-	XC6112C221ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C222	-	XC6112C222ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C223	-	XC6112C223ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C224	-	XC6112C224ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C225	-	XC6112C225ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C226	-	XC6112C226ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C227	-	XC6112C227ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C228	-	XC6112C228ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C229	-	XC6112C229ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C230	-	XC6112C230ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C231	-	XC6112C231ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C232	-	XC6112C232ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C233	-	XC6112C233ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C234	-	XC6112C234ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C235	-	XC6112C235ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C236	-	XC6112C236ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C237	-	XC6112C237ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C238	-	XC6112C238ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C239	-	XC6112C239ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C240	-	XC6112C240ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C241	-	XC6112C241ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C242	-	XC6112C242ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C243	-	XC6112C243ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C244	-	XC6112C244ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C245	-	XC6112C245ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C246	-	XC6112C246ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C247	-	XC6112C247ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C248	-	XC6112C248ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C249	-	XC6112C249ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C250	-	XC6112C250ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C3	-	XC6223A131GR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9C3	-	XCL209B233DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.3V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9C316	-	XC6112C316ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C317	-	XC6112C317ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C318	-	XC6112C318ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C319	-	XC6112C319ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C320	-	XC6112C320ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C321	-	XC6112C321ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C322	-	XC6112C322ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C323	-	XC6112C323ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C324	-	XC6112C324ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C325	-	XC6112C325ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C326	-	XC6112C326ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C327	-	XC6112C327ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C328	-	XC6112C328ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C329	-	XC6112C329ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C330	-	XC6112C330ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C331	-	XC6112C331ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C332	-	XC6112C332ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C333	-	XC6112C333ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C334	-	XC6112C334ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C335	-	XC6112C335ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C336	-	XC6112C336ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C337	-	XC6112C337ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C338	-	XC6112C338ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C339	-	XC6112C339ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C340	-	XC6112C340ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C341	-	XC6112C341ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C342	-	XC6112C342ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C343	-	XC6112C343ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C344	-	XC6112C344ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C345	-	XC6112C345ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C346	-	XC6112C346ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C347	-	XC6112C347ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C348	-	XC6112C348ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C349	-	XC6112C349ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C350	-	XC6112C350ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C4	-	XC6223A141GR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9C4	-	XCL209B243DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.4V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9C416	-	XC6112C416ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C417	-	XC6112C417ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C418	-	XC6112C418ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C419	-	XC6112C419ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C420	-	XC6112C420ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C421	-	XC6112C421ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C422	-	XC6112C422ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C423	-	XC6112C423ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C424	-	XC6112C424ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C425	-	XC6112C425ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C426	-	XC6112C426ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C427	-	XC6112C427ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C428	-	XC6112C428ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C429	-	XC6112C429ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C430	-	XC6112C430ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C431	-	XC6112C431ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C432	-	XC6112C432ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C433	-	XC6112C433ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C434	-	XC6112C434ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C435	-	XC6112C435ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C436	-	XC6112C436ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C437	-	XC6112C437ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C438	-	XC6112C438ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C439	-	XC6112C439ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C440	-	XC6112C440ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C441	-	XC6112C441ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C442	-	XC6112C442ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C443	-	XC6112C443ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C444	-	XC6112C444ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C445	-	XC6112C445ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C446	-	XC6112C446ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C447	-	XC6112C447ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C448	-	XC6112C448ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C449	-	XC6112C449ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C450	-	XC6112C450ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C5	-	XC6223A151GR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9C5	-	XCL209B253DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.5V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9C516	-	XC6112C516ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C517	-	XC6112C517ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C518	-	XC6112C518ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C519	-	XC6112C519ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C520	-	XC6112C520ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C521	-	XC6112C521ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C522	-	XC6112C522ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C523	-	XC6112C523ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C524	-	XC6112C524ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C525	-	XC6112C525ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C526	-	XC6112C526ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C527	-	XC6112C527ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C528	-	XC6112C528ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C529	-	XC6112C529ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C530	-	XC6112C530ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C531	-	XC6112C531ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C532	-	XC6112C532ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C533	-	XC6112C533ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C534	-	XC6112C534ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C535	-	XC6112C535ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C536	-	XC6112C536ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C537	-	XC6112C537ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C538	-	XC6112C538ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C539	-	XC6112C539ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C540	-	XC6112C540ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C541	-	XC6112C541ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C542	-	XC6112C542ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C543	-	XC6112C543ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C544	-	XC6112C544ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C545	-	XC6112C545ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C546	-	XC6112C546ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C547	-	XC6112C547ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C548	-	XC6112C548ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9C549	-	XC6112C549ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C550	-	XC6112C550ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C6	-	XC6223A161GR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9C6	-	XCL209B263DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.6V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9C616	-	XC6112C616ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C617	-	XC6112C617ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C618	-	XC6112C618ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C619	-	XC6112C619ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C620	-	XC6112C620ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C621	-	XC6112C621ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C622	-	XC6112C622ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C623	-	XC6112C623ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C624	-	XC6112C624ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C625	-	XC6112C625ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C626	-	XC6112C626ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C627	-	XC6112C627ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C628	-	XC6112C628ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C629	-	XC6112C629ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C630	-	XC6112C630ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C631	-	XC6112C631ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C632	-	XC6112C632ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C633	-	XC6112C633ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C634	-	XC6112C634ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C635	-	XC6112C635ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C636	-	XC6112C636ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C637	-	XC6112C637ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C638	-	XC6112C638ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C639	-	XC6112C639ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C640	-	XC6112C640ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C641	-	XC6112C641ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C642	-	XC6112C642ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C643	-	XC6112C643ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C644	-	XC6112C644ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C645	-	XC6112C645ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C646	-	XC6112C646ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C647	-	XC6112C647ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C648	-	XC6112C648ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C649	-	XC6112C649ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C650	-	XC6112C650ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD16	9b	Tor
9C7	-	XC6223A171GR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9C7	-	XCL209B273DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.7V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9C8	-	XC6223A181GR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9C8	-	XCL209B283DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.8V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9C9	-	XC6223A191GR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9C9	-	XCL209B293DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.9V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9CA	-	XC6223A201GR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CA	-	XCL209B2A3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.05V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9CB	-	XC6223A211GR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CB	-	XCL209B2B3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.15V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9CC	-	XC6223A221GR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CC	-	XCL209B2C3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.25V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9CD	-	XC6223A231GR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CD	-	XCL209B2D3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.35V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9CE	-	XC6223A241GR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CE	-	XCL209B2E3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.45V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9CF	-	XC6223A251GR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CF	-	XCL209B2F3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.55V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9CH	-	XC6223A261GR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CH	-	XCL209B2H3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.65V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9CK	-	XC6223A271GR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CK	-	XCL209B2K3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.75V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9CL	-	XC6223A281GR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CL	-	XCL209B2L3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.85V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9CM	-	XC6223A291GR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CM	-	XCL209B2M3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 2.95V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9CN	-	XC6223A301GR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CP	-	XC6223A311GR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CR	-	XC6223A321GR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CS	-	XC6223A331GR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CT	-	XC6223A341GR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9CU	-	XC6223A351GR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CV	-	XC6223A361GR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CX	-	XC6223A371GR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CY	-	XC6223A381GR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9CZ	-	XC6223A391GR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9D	-	BZT52C7V5LP	Z-diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 250mW	DFN1006-2	13d	-	2a	Di
9D	-	BZT52C7V5LP	Z-diode	7.5V±5%, Izt=5mA, Zzt=15Ω, 250mW	DFN1006-2	13d	-	2b	Di
9D	-	RP111L091D	LVR-IC	LDO, 0.9V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9D	-	RP202K111D	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9D	-	XC6221A1417R	LVR-IC	LDO, 1.4V±20mV, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9D	-	XC6223B23B9R-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9D0	-	XC6223A401GR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9D0	-	XCL209B303DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.0V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9D016	-	XC6117D016ER	Vdet-IC	1.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D017	-	XC6117D017ER	Vdet-IC	1.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D018	-	XC6117D018ER	Vdet-IC	1.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D019	-	XC6117D019ER	Vdet-IC	1.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D020	-	XC6117D020ER	Vdet-IC	2.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D021	-	XC6117D021ER	Vdet-IC	2.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D022	-	XC6117D022ER	Vdet-IC	2.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D023	-	XC6117D023ER	Vdet-IC	2.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D024	-	XC6117D024ER	Vdet-IC	2.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D025	-	XC6117D025ER	Vdet-IC	2.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D026	-	XC6117D026ER	Vdet-IC	2.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D027	-	XC6117D027ER	Vdet-IC	2.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D028	-	XC6117D028ER	Vdet-IC	2.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D029	-	XC6117D029ER	Vdet-IC	2.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D030	-	XC6117D030ER	Vdet-IC	3.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D031	-	XC6117D031ER	Vdet-IC	3.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D032	-	XC6117D032ER	Vdet-IC	3.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D033	-	XC6117D033ER	Vdet-IC	3.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D034	-	XC6117D034ER	Vdet-IC	3.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D035	-	XC6117D035ER	Vdet-IC	3.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D036	-	XC6117D036ER	Vdet-IC	3.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D037	-	XC6117D037ER	Vdet-IC	3.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D038	-	XC6117D038ER	Vdet-IC	3.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D039	-	XC6117D039ER	Vdet-IC	3.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D040	-	XC6117D040ER	Vdet-IC	4.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D041	-	XC6117D041ER	Vdet-IC	4.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D042	-	XC6117D042ER	Vdet-IC	4.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D043	-	XC6117D043ER	Vdet-IC	4.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D044	-	XC6117D044ER	Vdet-IC	4.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D045	-	XC6117D045ER	Vdet-IC	4.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D046	-	XC6117D046ER	Vdet-IC	4.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D047	-	XC6117D047ER	Vdet-IC	4.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D048	-	XC6117D048ER	Vdet-IC	4.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D049	-	XC6117D049ER	Vdet-IC	4.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D050	-	XC6117D050ER	Vdet-IC	5.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=100ms	USP-6C	49xs	VD22	9b	Tor
9D1	-	XCL209B313DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.1V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9D2	-	XCL209B323DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.2V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9D3	-	XCL209B333DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.3V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9D316	-	XC6112D316ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D317	-	XC6112D317ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D318	-	XC6112D318ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D319	-	XC6112D319ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D320	-	XC6112D320ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D321	-	XC6112D321ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D322	-	XC6112D322ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D323	-	XC6112D323ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D324	-	XC6112D324ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D325	-	XC6112D325ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D326	-	XC6112D326ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D327	-	XC6112D327ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D328	-	XC6112D328ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D329	-	XC6112D329ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D330	-	XC6112D330ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D331	-	XC6112D331ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D332	-	XC6112D332ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D333	-	XC6112D333ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D334	-	XC6112D334ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9D335	-	XC6112D335ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D336	-	XC6112D336ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D337	-	XC6112D337ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D338	-	XC6112D338ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D339	-	XC6112D339ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D340	-	XC6112D340ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D341	-	XC6112D341ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D342	-	XC6112D342ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D343	-	XC6112D343ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D344	-	XC6112D344ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D345	-	XC6112D345ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D346	-	XC6112D346ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D347	-	XC6112D347ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D348	-	XC6112D348ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D349	-	XC6112D349ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D350	-	XC6112D350ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D4	-	XCL209B343DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.4V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9D416	-	XC6112D416ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D417	-	XC6112D417ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D418	-	XC6112D418ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D419	-	XC6112D419ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D420	-	XC6112D420ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D421	-	XC6112D421ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D422	-	XC6112D422ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D423	-	XC6112D423ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D424	-	XC6112D424ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D425	-	XC6112D425ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D426	-	XC6112D426ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D427	-	XC6112D427ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D428	-	XC6112D428ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D429	-	XC6112D429ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D430	-	XC6112D430ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D431	-	XC6112D431ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D432	-	XC6112D432ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D433	-	XC6112D433ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D434	-	XC6112D434ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D435	-	XC6112D435ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D436	-	XC6112D436ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D437	-	XC6112D437ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D438	-	XC6112D438ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D439	-	XC6112D439ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D440	-	XC6112D440ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D441	-	XC6112D441ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D442	-	XC6112D442ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D443	-	XC6112D443ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D444	-	XC6112D444ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D445	-	XC6112D445ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D446	-	XC6112D446ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D447	-	XC6112D447ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D448	-	XC6112D448ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D449	-	XC6112D449ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D450	-	XC6112D450ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D5	-	XCL209B353DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.5V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9D516	-	XC6112D516ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D517	-	XC6112D517ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D518	-	XC6112D518ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D519	-	XC6112D519ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D520	-	XC6112D520ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D521	-	XC6112D521ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D522	-	XC6112D522ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D523	-	XC6112D523ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D524	-	XC6112D524ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D525	-	XC6112D525ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D526	-	XC6112D526ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D527	-	XC6112D527ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D528	-	XC6112D528ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D529	-	XC6112D529ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D530	-	XC6112D530ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D531	-	XC6112D531ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D532	-	XC6112D532ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9D533	-	XC6112D533ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D534	-	XC6112D534ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D535	-	XC6112D535ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D536	-	XC6112D536ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D537	-	XC6112D537ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D538	-	XC6112D538ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D539	-	XC6112D539ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D540	-	XC6112D540ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D541	-	XC6112D541ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D542	-	XC6112D542ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D543	-	XC6112D543ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D544	-	XC6112D544ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D545	-	XC6112D545ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D546	-	XC6112D546ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D547	-	XC6112D547ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D548	-	XC6112D548ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D549	-	XC6112D549ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D550	-	XC6112D550ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D6	-	XCL209B363DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.6V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9D616	-	XC6112D616ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D617	-	XC6112D617ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D618	-	XC6112D618ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D619	-	XC6112D619ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D620	-	XC6112D620ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D621	-	XC6112D621ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D622	-	XC6112D622ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D623	-	XC6112D623ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D624	-	XC6112D624ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D625	-	XC6112D625ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D626	-	XC6112D626ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D627	-	XC6112D627ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D628	-	XC6112D628ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D629	-	XC6112D629ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D630	-	XC6112D630ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D631	-	XC6112D631ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D632	-	XC6112D632ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D633	-	XC6112D633ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D634	-	XC6112D634ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D635	-	XC6112D635ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D636	-	XC6112D636ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D637	-	XC6112D637ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D638	-	XC6112D638ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D639	-	XC6112D639ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D640	-	XC6112D640ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D641	-	XC6112D641ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D642	-	XC6112D642ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D643	-	XC6112D643ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D644	-	XC6112D644ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D645	-	XC6112D645ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D646	-	XC6112D646ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D647	-	XC6112D647ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D648	-	XC6112D648ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D649	-	XC6112D649ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D650	-	XC6112D650ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD16	9b	Tor
9D7	-	XCL209B373DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.7V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9D8	-	XCL209B383DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.8V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9D9	-	XCL209B393DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.9V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9DA	-	XCL209B3A3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.05V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9DB	-	XCL209B3B3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.15V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9DC	-	XCL209B3C3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.25V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9DD	-	XCL209B3D3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.35V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9DE	-	XCL209B3E3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.45V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9DF	-	XCL209B3F3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.55V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9DH	-	XCL209B3H3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.65V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9DK	-	XCL209B3K3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.75V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9DL	-	XCL209B3L3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.85V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9DM	-	XCL209B3M3DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 3.95V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9E	-	BZT52C8V2LP	Z-diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 250mW	DFN1006-2	13d	-	2b	Di
9E	-	BZT52C8V2LP	Z-diode	8.2V±5%, Izt=5mA, Zzt=15Ω, 250mW	DFN1006-2	13d	-	2a	Di
9E	-	RP111L101D	LVR-IC	LDO, 1.0V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9E	-	RP202K121D	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9E	-	XC6221A1517R	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9E	-	XC6223B24B9R-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9E0	-	XCL209B403DR	DC-DC-IC	PWM/PFM st-down, 3MHz, 4.0V±2%, 400mA, +CE, CL	USP-10B03	107dc9	DC23	9a	Tor
9E016	-	XC6117E016ER	Vdet-IC	1.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E017	-	XC6117E017ER	Vdet-IC	1.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E018	-	XC6117E018ER	Vdet-IC	1.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E019	-	XC6117E019ER	Vdet-IC	1.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E020	-	XC6117E020ER	Vdet-IC	2.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E021	-	XC6117E021ER	Vdet-IC	2.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E022	-	XC6117E022ER	Vdet-IC	2.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E023	-	XC6117E023ER	Vdet-IC	2.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E024	-	XC6117E024ER	Vdet-IC	2.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E025	-	XC6117E025ER	Vdet-IC	2.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E026	-	XC6117E026ER	Vdet-IC	2.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E027	-	XC6117E027ER	Vdet-IC	2.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E028	-	XC6117E028ER	Vdet-IC	2.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E029	-	XC6117E029ER	Vdet-IC	2.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E030	-	XC6117E030ER	Vdet-IC	3.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E031	-	XC6117E031ER	Vdet-IC	3.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E032	-	XC6117E032ER	Vdet-IC	3.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E033	-	XC6117E033ER	Vdet-IC	3.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E034	-	XC6117E034ER	Vdet-IC	3.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E035	-	XC6117E035ER	Vdet-IC	3.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E036	-	XC6117E036ER	Vdet-IC	3.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E037	-	XC6117E037ER	Vdet-IC	3.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E038	-	XC6117E038ER	Vdet-IC	3.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E039	-	XC6117E039ER	Vdet-IC	3.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E040	-	XC6117E040ER	Vdet-IC	4.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E041	-	XC6117E041ER	Vdet-IC	4.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E042	-	XC6117E042ER	Vdet-IC	4.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E043	-	XC6117E043ER	Vdet-IC	4.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E044	-	XC6117E044ER	Vdet-IC	4.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E045	-	XC6117E045ER	Vdet-IC	4.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E046	-	XC6117E046ER	Vdet-IC	4.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E047	-	XC6117E047ER	Vdet-IC	4.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E048	-	XC6117E048ER	Vdet-IC	4.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E049	-	XC6117E049ER	Vdet-IC	4.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E050	-	XC6117E050ER	Vdet-IC	5.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=200ms	USP-6C	49xs	VD22	9b	Tor
9E2	-	XC6223A12BGR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9E3	-	XC6223A13BGR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9E4	-	XC6223A14BGR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9E416	-	XC6112E416ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E417	-	XC6112E417ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E418	-	XC6112E418ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E419	-	XC6112E419ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E420	-	XC6112E420ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E421	-	XC6112E421ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E422	-	XC6112E422ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E423	-	XC6112E423ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E424	-	XC6112E424ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E425	-	XC6112E425ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E426	-	XC6112E426ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E427	-	XC6112E427ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E428	-	XC6112E428ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E429	-	XC6112E429ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E430	-	XC6112E430ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E431	-	XC6112E431ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E432	-	XC6112E432ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E433	-	XC6112E433ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E434	-	XC6112E434ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E435	-	XC6112E435ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E436	-	XC6112E436ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E437	-	XC6112E437ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E438	-	XC6112E438ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E439	-	XC6112E439ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E440	-	XC6112E440ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E441	-	XC6112E441ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E442	-	XC6112E442ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E443	-	XC6112E443ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9E444	-	XC6112E444ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E445	-	XC6112E445ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E446	-	XC6112E446ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E447	-	XC6112E447ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E448	-	XC6112E448ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E449	-	XC6112E449ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E450	-	XC6112E450ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E5	-	XC6223A15BGR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9E516	-	XC6112E516ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E517	-	XC6112E517ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E518	-	XC6112E518ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E519	-	XC6112E519ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E520	-	XC6112E520ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E521	-	XC6112E521ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E522	-	XC6112E522ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E523	-	XC6112E523ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E524	-	XC6112E524ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E525	-	XC6112E525ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E526	-	XC6112E526ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E527	-	XC6112E527ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E528	-	XC6112E528ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E529	-	XC6112E529ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E530	-	XC6112E530ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E531	-	XC6112E531ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E532	-	XC6112E532ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E533	-	XC6112E533ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E534	-	XC6112E534ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E535	-	XC6112E535ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E536	-	XC6112E536ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E537	-	XC6112E537ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E538	-	XC6112E538ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E539	-	XC6112E539ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E540	-	XC6112E540ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E541	-	XC6112E541ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E542	-	XC6112E542ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E543	-	XC6112E543ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E544	-	XC6112E544ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E545	-	XC6112E545ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E546	-	XC6112E546ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E547	-	XC6112E547ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E548	-	XC6112E548ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E549	-	XC6112E549ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E550	-	XC6112E550ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E6	-	XC6223A16BGR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9E616	-	XC6112E616ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E617	-	XC6112E617ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E618	-	XC6112E618ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E619	-	XC6112E619ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E620	-	XC6112E620ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E621	-	XC6112E621ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E622	-	XC6112E622ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E623	-	XC6112E623ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E624	-	XC6112E624ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E625	-	XC6112E625ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E626	-	XC6112E626ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E627	-	XC6112E627ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E628	-	XC6112E628ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E629	-	XC6112E629ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E630	-	XC6112E630ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E631	-	XC6112E631ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E632	-	XC6112E632ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E633	-	XC6112E633ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E634	-	XC6112E634ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E635	-	XC6112E635ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E636	-	XC6112E636ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E637	-	XC6112E637ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E638	-	XC6112E638ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E639	-	XC6112E639ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E640	-	XC6112E640ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E641	-	XC6112E641ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9E642	-	XC6112E642ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E643	-	XC6112E643ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E644	-	XC6112E644ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E645	-	XC6112E645ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E646	-	XC6112E646ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E647	-	XC6112E647ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E648	-	XC6112E648ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E649	-	XC6112E649ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E650	-	XC6112E650ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD16	9b	Tor
9E7	-	XC6223A17BGR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9E8	-	XC6223A18BGR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9E9	-	XC6223A19BGR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9EA	-	XC6223A20BGR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9EB	-	XC6223A21BGR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9EC	-	XC6223A22BGR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9ED	-	XC6223A23BGR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9EE	-	XC6223A24BGR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9EF	-	XC6223A25BGR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9EH	-	XC6223A26BGR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9EK	-	XC6223A27BGR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9EL	-	XC6223A28BGR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9EM	-	XC6223A29BGR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9EN	-	XC6223A30BGR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9EP	-	XC6223A31BGR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9ER	-	XC6223A32BGR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9ES	-	XC6223A33BGR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9ET	-	XC6223A34BGR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9EU	-	XC6223A35BGR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9EV	-	XC6223A36BGR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9EX	-	XC6223A37BGR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9EY	-	XC6223A38BGR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9EZ	-	XC6223A39BGR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE	USP-4	45vm	VR4	9a	Tor
9F	-	BZT52C9V1LP	Z-diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 250mW	DFN1006-2	13d	-	2a	Di
9F	-	BZT52C9V1LP	Z-diode	9.1V±5%, Izt=5mA, Zzt=15Ω, 250mW	DFN1006-2	13d	-	2b	Di
9F	-	RP111L111D	LVR-IC	LDO, 1.1V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9F	-	RP202K131D	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9F	-	XC6221A1617R	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9F	-	XC6223B25B9R-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9F	-	XCL209F083DR	DC-DC-IC	PWM/PFM st-down, 3MHz, Adj. 0.9..4.0V, 400mA, +CE, CL	USP-10B03	107db	DC24	9a	Tor
9F016	-	XC6117F016ER	Vdet-IC	1.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F017	-	XC6117F017ER	Vdet-IC	1.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F018	-	XC6117F018ER	Vdet-IC	1.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F019	-	XC6117F019ER	Vdet-IC	1.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F020	-	XC6117F020ER	Vdet-IC	2.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F021	-	XC6117F021ER	Vdet-IC	2.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F022	-	XC6117F022ER	Vdet-IC	2.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F023	-	XC6117F023ER	Vdet-IC	2.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F024	-	XC6117F024ER	Vdet-IC	2.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F025	-	XC6117F025ER	Vdet-IC	2.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F026	-	XC6117F026ER	Vdet-IC	2.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F027	-	XC6117F027ER	Vdet-IC	2.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F028	-	XC6117F028ER	Vdet-IC	2.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F029	-	XC6117F029ER	Vdet-IC	2.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F030	-	XC6117F030ER	Vdet-IC	3.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F031	-	XC6117F031ER	Vdet-IC	3.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F032	-	XC6117F032ER	Vdet-IC	3.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F033	-	XC6117F033ER	Vdet-IC	3.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F034	-	XC6117F034ER	Vdet-IC	3.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F035	-	XC6117F035ER	Vdet-IC	3.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F036	-	XC6117F036ER	Vdet-IC	3.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F037	-	XC6117F037ER	Vdet-IC	3.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F038	-	XC6117F038ER	Vdet-IC	3.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F039	-	XC6117F039ER	Vdet-IC	3.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F040	-	XC6117F040ER	Vdet-IC	4.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F041	-	XC6117F041ER	Vdet-IC	4.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F042	-	XC6117F042ER	Vdet-IC	4.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F043	-	XC6117F043ER	Vdet-IC	4.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F044	-	XC6117F044ER	Vdet-IC	4.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F045	-	XC6117F045ER	Vdet-IC	4.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F046	-	XC6117F046ER	Vdet-IC	4.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9F047	-	XC6117F047ER	Vdet-IC	4.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F048	-	XC6117F048ER	Vdet-IC	4.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F049	-	XC6117F049ER	Vdet-IC	4.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F050	-	XC6117F050ER	Vdet-IC	5.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=400ms	USP-6C	49xs	VD22	9b	Tor
9F2	-	XC6223B121GR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9F3	-	XC6223B131GR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9F4	-	XC6223B141GR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9F5	-	XC6223B151GR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9F516	-	XC6112F516ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F517	-	XC6112F517ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F518	-	XC6112F518ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F519	-	XC6112F519ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F520	-	XC6112F520ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F521	-	XC6112F521ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F522	-	XC6112F522ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F523	-	XC6112F523ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F524	-	XC6112F524ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F525	-	XC6112F525ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F526	-	XC6112F526ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F527	-	XC6112F527ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F528	-	XC6112F528ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F529	-	XC6112F529ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F530	-	XC6112F530ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F531	-	XC6112F531ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F532	-	XC6112F532ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F533	-	XC6112F533ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F534	-	XC6112F534ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F535	-	XC6112F535ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F536	-	XC6112F536ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F537	-	XC6112F537ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F538	-	XC6112F538ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F539	-	XC6112F539ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F540	-	XC6112F540ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F541	-	XC6112F541ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F542	-	XC6112F542ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F543	-	XC6112F543ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F544	-	XC6112F544ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F545	-	XC6112F545ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F546	-	XC6112F546ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F547	-	XC6112F547ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F548	-	XC6112F548ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F549	-	XC6112F549ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F550	-	XC6112F550ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F6	-	XC6223B161GR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9F616	-	XC6112F616ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F617	-	XC6112F617ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F618	-	XC6112F618ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F619	-	XC6112F619ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F620	-	XC6112F620ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F621	-	XC6112F621ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F622	-	XC6112F622ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F623	-	XC6112F623ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F624	-	XC6112F624ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F625	-	XC6112F625ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F626	-	XC6112F626ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F627	-	XC6112F627ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F628	-	XC6112F628ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F629	-	XC6112F629ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F630	-	XC6112F630ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F631	-	XC6112F631ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F632	-	XC6112F632ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F633	-	XC6112F633ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F634	-	XC6112F634ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F635	-	XC6112F635ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F636	-	XC6112F636ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F637	-	XC6112F637ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F638	-	XC6112F638ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F639	-	XC6112F639ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F640	-	XC6112F640ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F641	-	XC6112F641ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9F642	-	XC6112F642ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F643	-	XC6112F643ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F644	-	XC6112F644ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F645	-	XC6112F645ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F646	-	XC6112F646ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F647	-	XC6112F647ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F648	-	XC6112F648ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F649	-	XC6112F649ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F650	-	XC6112F650ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD16	9b	Tor
9F7	-	XC6223B171GR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9F8	-	XC6223B181GR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9F9	-	XC6223B191GR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FA	-	XC6223B201GR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FB	-	XC6223B211GR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FC	-	XC6223B221GR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FD	-	XC6223B231GR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FE	-	XC6223B241GR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FF	-	XC6223B251GR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FH	-	XC6223B261GR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FK	-	XC6223B271GR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FL	-	XC6223B281GR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FM	-	XC6223B291GR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FN	-	XC6223B301GR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FP	-	XC6223B311GR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FR	-	XC6223B321GR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FS	-	XC6223B331GR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FT	-	XC6223B341GR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FU	-	XC6223B351GR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FV	-	XC6223B361GR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FX	-	XC6223B371GR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FY	-	XC6223B381GR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9FZ	-	XC6223B391GR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9G	-	BZT52C10LP	Z-diode	10V±5%, Izt=5mA, Zzt=20Ω, 250mW	DFN1006-2	13d	-	2b	Di
9G	-	BZT52C10LP	Z-diode	10V±5%, Izt=5mA, Zzt=20Ω, 250mW	DFN1006-2	13d	-	2a	Di
9G	-	RP111L121D	LVR-IC	LDO, 1.2V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9G	-	RP202K141D	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9G4	-	MIC5371-1.8/1.2YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.2V±2%, 150mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
9H	-	BZT52C11LP	Z-diode	11V±5%, Izt=5mA, Zzt=20Ω, 250mW	DFN1006-2	13d	-	2a	Di
9H	-	BZT52C11LP	Z-diode	11V±5%, Izt=5mA, Zzt=20Ω, 250mW	DFN1006-2	13d	-	2b	Di
9H	-	RP111L121D5	LVR-IC	LDO, 1.25V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9H	-	RP202K151D	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9H	-	XC6221A1717R	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9H	-	XC6223B26B9R-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9H0	-	XC6223B401GR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9H016	-	XC6117H016ER	Vdet-IC	1.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H017	-	XC6117H017ER	Vdet-IC	1.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H018	-	XC6117H018ER	Vdet-IC	1.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H019	-	XC6117H019ER	Vdet-IC	1.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H020	-	XC6117H020ER	Vdet-IC	2.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H021	-	XC6117H021ER	Vdet-IC	2.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H022	-	XC6117H022ER	Vdet-IC	2.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H023	-	XC6117H023ER	Vdet-IC	2.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H024	-	XC6117H024ER	Vdet-IC	2.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H025	-	XC6117H025ER	Vdet-IC	2.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H026	-	XC6117H026ER	Vdet-IC	2.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H027	-	XC6117H027ER	Vdet-IC	2.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H028	-	XC6117H028ER	Vdet-IC	2.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H029	-	XC6117H029ER	Vdet-IC	2.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H030	-	XC6117H030ER	Vdet-IC	3.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H031	-	XC6117H031ER	Vdet-IC	3.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H032	-	XC6117H032ER	Vdet-IC	3.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H033	-	XC6117H033ER	Vdet-IC	3.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H034	-	XC6117H034ER	Vdet-IC	3.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H035	-	XC6117H035ER	Vdet-IC	3.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H036	-	XC6117H036ER	Vdet-IC	3.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H037	-	XC6117H037ER	Vdet-IC	3.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H038	-	XC6117H038ER	Vdet-IC	3.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H039	-	XC6117H039ER	Vdet-IC	3.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H040	-	XC6117H040ER	Vdet-IC	4.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H041	-	XC6117H041ER	Vdet-IC	4.1V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9H042	-	XC6117H042ER	Vdet-IC	4.2V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H043	-	XC6117H043ER	Vdet-IC	4.3V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H044	-	XC6117H044ER	Vdet-IC	4.4V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H045	-	XC6117H045ER	Vdet-IC	4.5V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H046	-	XC6117H046ER	Vdet-IC	4.6V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H047	-	XC6117H047ER	Vdet-IC	4.7V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H048	-	XC6117H048ER	Vdet-IC	4.8V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H049	-	XC6117H049ER	Vdet-IC	4.9V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H050	-	XC6117H050ER	Vdet-IC	5.0V±2%, -MR, +Rst PPO, -Rst ODO, Rt=1.6s	USP-6C	49xs	VD22	9b	Tor
9H616	-	XC6112H616ER	Vdet-IC	1.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H617	-	XC6112H617ER	Vdet-IC	1.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H618	-	XC6112H618ER	Vdet-IC	1.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H619	-	XC6112H619ER	Vdet-IC	1.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H620	-	XC6112H620ER	Vdet-IC	2.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H621	-	XC6112H621ER	Vdet-IC	2.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H622	-	XC6112H622ER	Vdet-IC	2.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H623	-	XC6112H623ER	Vdet-IC	2.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H624	-	XC6112H624ER	Vdet-IC	2.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H625	-	XC6112H625ER	Vdet-IC	2.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H626	-	XC6112H626ER	Vdet-IC	2.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H627	-	XC6112H627ER	Vdet-IC	2.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H628	-	XC6112H628ER	Vdet-IC	2.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H629	-	XC6112H629ER	Vdet-IC	2.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H630	-	XC6112H630ER	Vdet-IC	3.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H631	-	XC6112H631ER	Vdet-IC	3.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H632	-	XC6112H632ER	Vdet-IC	3.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H633	-	XC6112H633ER	Vdet-IC	3.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H634	-	XC6112H634ER	Vdet-IC	3.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H635	-	XC6112H635ER	Vdet-IC	3.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H636	-	XC6112H636ER	Vdet-IC	3.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H637	-	XC6112H637ER	Vdet-IC	3.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H638	-	XC6112H638ER	Vdet-IC	3.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H639	-	XC6112H639ER	Vdet-IC	3.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H640	-	XC6112H640ER	Vdet-IC	4.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H641	-	XC6112H641ER	Vdet-IC	4.1V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H642	-	XC6112H642ER	Vdet-IC	4.2V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H643	-	XC6112H643ER	Vdet-IC	4.3V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H644	-	XC6112H644ER	Vdet-IC	4.4V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H645	-	XC6112H645ER	Vdet-IC	4.5V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H646	-	XC6112H646ER	Vdet-IC	4.6V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H647	-	XC6112H647ER	Vdet-IC	4.7V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H648	-	XC6112H648ER	Vdet-IC	4.8V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H649	-	XC6112H649ER	Vdet-IC	4.9V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9H650	-	XC6112H650ER	Vdet-IC	5.0V±2%, -MR, -Reset ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD16	9b	Tor
9J	-	BZT52C12LP	Z-diode	12V±5%, Izt=5mA, Zzt=25Ω, 250mW	DFN1006-2	13d	-	2b	Di
9J	-	BZT52C12LP	Z-diode	12V±5%, Izt=5mA, Zzt=25Ω, 250mW	DFN1006-2	13d	-	2a	Di
9J	-	RP111L131D	LVR-IC	LDO, 1.3V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9J	-	RP202K161D	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9K	-	BZT52C13LP	Z-diode	13V±5%, Izt=5mA, Zzt=30Ω, 250mW	DFN1006-2	13d	-	2b	Di
9K	-	BZT52C13LP	Z-diode	13V±5%, Izt=5mA, Zzt=30Ω, 250mW	DFN1006-2	13d	-	2a	Di
9K	-	RP111L141D	LVR-IC	LDO, 1.4V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9K	-	RP202K171D	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9K	-	XC6221A1817R	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9K	-	XC6223B27B9R-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9K2	-	XC6223B12BGR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9K3	-	XC6223B13BGR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9K4	-	XC6223B14BGR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9K5	-	XC6223B15BGR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9K6	-	XC6223B16BGR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9K7	-	XC6223B17BGR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9K8	-	XC6223B18BGR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9K9	-	XC6223B19BGR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KA	-	XC6223B20BGR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KB	-	XC6223B21BGR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KC	-	XC6223B22BGR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KD	-	XC6223B23BGR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KE	-	XC6223B24BGR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KF	-	XC6223B25BGR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KH	-	XC6223B26BGR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KK	-	XC6223B27BGR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9KL	-	XC6223B28BGR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KM	-	XC6223B29BGR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KN	-	XC6223B30BGR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KP	-	XC6223B31BGR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KR	-	XC6223B32BGR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KS	-	XC6223B33BGR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KT	-	XC6223B34BGR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KU	-	XC6223B35BGR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KV	-	XC6223B36BGR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KX	-	XC6223B37BGR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KY	-	XC6223B38BGR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9KZ	-	XC6223B39BGR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
9L	-	BZT52C15LP	Z-diode	15V±5%, Izt=5mA, Zzt=30Ω, 250mW	DFN1006-2	13d	-	2b	Di
9L	-	BZT52C15LP	Z-diode	15V±5%, Izt=5mA, Zzt=30Ω, 250mW	DFN1006-2	13d	-	2a	Di
9L	-	RP111L151D	LVR-IC	LDO, 1.5V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9L	-	RP202K181D	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9L	-	XC6221A1917R	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9L	-	XC6223B28B9R-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9L2	-	XC6223C121GR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9L3	-	XC6223C131GR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9L4	-	XC6223C141GR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9L5	-	XC6223C151GR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9L6	-	XC6223C161GR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9L7	-	XC6223C171GR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9L8	-	XC6223C181GR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9L9	-	XC6223C191GR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LA	-	XC6223C201GR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LB	-	XC6223C211GR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LC	-	XC6223C221GR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LD	-	XC6223C231GR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LE	-	XC6223C241GR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LF	-	XC6223C251GR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LH	-	XC6223C261GR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LK	-	XC6223C271GR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LL	-	XC6223C281GR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LM	-	XC6223C291GR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LN	-	XC6223C301GR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LP	-	XC6223C311GR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LR	-	XC6223C321GR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LS	-	XC6223C331GR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LT	-	XC6223C341GR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LU	-	XC6223C351GR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LV	-	XC6223C361GR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LX	-	XC6223C371GR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LY	-	XC6223C381GR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9LZ	-	XC6223C391GR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9M	-	BZT52C16LP	Z-diode	16V±5%, Izt=5mA, Zzt=40Ω, 250mW	DFN1006-2	13d	-	2a	Di
9M	-	BZT52C16LP	Z-diode	16V±5%, Izt=5mA, Zzt=40Ω, 250mW	DFN1006-2	13d	-	2b	Di
9M	-	RP111L161D	LVR-IC	LDO, 1.6V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9M	-	RP202K191D	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9M	-	XC6221A2017R	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9M	-	XC6223B29B9R-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9M0	-	XC6223C401GR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9M4	-	MIC5371-2.8/1.2YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.2V±2%, 150mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
9MF	-	MIC5371-2.8/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±2%, 150mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
9MG	-	MIC5371-2.8/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 150mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
9MM	-	MIC5371-2.8/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 150mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
9N	-	BZT52C18LP	Z-diode	18V±5%, Izt=5mA, Zzt=45Ω, 250mW	DFN1006-2	13d	-	2b	Di
9N	-	BZT52C18LP	Z-diode	18V±5%, Izt=5mA, Zzt=45Ω, 250mW	DFN1006-2	13d	-	2a	Di
9N	-	RP111L171D	LVR-IC	LDO, 1.7V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9N	-	RP202K201D	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9N	-	XC6221A2117R	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9N	-	XC6223B30B9R-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9N2	-	XC6223C12BGR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9N3	-	XC6223C13BGR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9N4	-	XC6223C14BGR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9N5	-	XC6223C15BGR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9N6	-	XC6223C16BGR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9N7	-	XC6223C17BGR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9N8	-	XC6223C18BGR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9N9	-	XC6223C19BGR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NA	-	XC6223C20BGR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NB	-	XC6223C21BGR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NC	-	XC6223C22BGR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9ND	-	XC6223C23BGR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NE	-	XC6223C24BGR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NF	-	XC6223C25BGR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NH	-	XC6223C26BGR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NK	-	XC6223C27BGR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NL	-	XC6223C28BGR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NM	-	XC6223C29BGR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NN	-	XC6223C30BGR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NP	-	XC6223C31BGR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NR	-	XC6223C32BGR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NS	-	XC6223C33BGR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NT	-	XC6223C34BGR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NU	-	XC6223C35BGR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NV	-	XC6223C36BGR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NX	-	XC6223C37BGR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NY	-	XC6223C38BGR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9NZ	-	XC6223C39BGR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
9P	-	BZT52C20LP	Z-diode	20V±5%, Izt=5mA, Zzt=55Ω, 250mW	DFN1006-2	13d	-	2b	Di
9P	-	BZT52C20LP	Z-diode	20V±5%, Izt=5mA, Zzt=55Ω, 250mW	DFN1006-2	13d	-	2a	Di
9P	-	RP111L181D	LVR-IC	LDO, 1.8V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9P	-	RP202K211D	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9P	-	XC6221A2217R	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9P	-	XC6223B31B9R-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9P2	-	XC6223D121GR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9P3	-	XC6223D131GR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9P4	-	XC6223D141GR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9P5	-	XC6223D151GR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9P6	-	XC6223D161GR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9P7	-	XC6223D171GR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9P8	-	XC6223D181GR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9P9	-	XC6223D191GR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PA	-	XC6223D201GR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PB	-	XC6223D211GR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PC	-	XC6223D221GR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PD	-	XC6223D231GR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PE	-	XC6223D241GR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PF	-	XC6223D251GR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PH	-	XC6223D261GR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PK	-	XC6223D271GR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PL	-	XC6223D281GR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PM	-	MIC5371-3.0/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.8V±2%, 150mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
9PM	-	XC6223D291GR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PN	-	XC6223D301GR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PP	-	MIC5371-3.0/3.0YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 150mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
9PP	-	XC6223D311GR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PR	-	XC6223D321GR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PS	-	XC6223D331GR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PT	-	XC6223D341GR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PU	-	XC6223D351GR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PV	-	XC6223D361GR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PX	-	XC6223D371GR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PY	-	XC6223D381GR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9PZ	-	XC6223D391GR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9Q	-	RP111L181D5	LVR-IC	LDO, 1.85V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9Q	-	RP202K221D	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9R	-	BZT52C22LP	Z-diode	22V±5%, Izt=5mA, Zzt=55Ω, 250mW	DFN1006-2	13d	-	2b	Di
9R	-	BZT52C22LP	Z-diode	22V±5%, Izt=5mA, Zzt=55Ω, 250mW	DFN1006-2	13d	-	2a	Di
9R	-	RP111L191D	LVR-IC	LDO, 1.9V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9R	-	RP202K231D	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9R	-	XC6221A2317R	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9R	-	XC6223B32B9R-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9R0	-	XC6223D401GR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9S	-	BZT52C24LP	Z-diode	24V±5%, Izt=5mA, Zzt=70Ω, 250mW	DFN1006-2	13d	-	2a	Di
9S	-	BZT52C24LP	Z-diode	24V±5%, Izt=5mA, Zzt=70Ω, 250mW	DFN1006-2	13d	-	2b	Di
9S	-	RP111L201D	LVR-IC	LDO, 2.0V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9S	-	RP202K241D	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9S	-	XC6221A2417R	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9S	-	XC6223B33B9R-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9S2	-	XC6223D12BGR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9S3	-	XC6223D13BGR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9S4	-	XC6223D14BGR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9S5	-	XC6223D15BGR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9S6	-	XC6223D16BGR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9S7	-	XC6223D17BGR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9S8	-	XC6223D18BGR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9S9	-	XC6223D19BGR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SA	-	XC6223D20BGR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SB	-	XC6223D21BGR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SC	-	XC6223D22BGR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SD	-	XC6223D23BGR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SE	-	XC6223D24BGR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SF	-	XC6223D25BGR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SG	-	MIC5371-3.3/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 150mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
9SH	-	XC6223D26BGR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SK	-	XC6223D27BGR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SL	-	XC6223D28BGR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SM	-	MIC5371-3.3/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 150mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
9SM	-	XC6223D29BGR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SN	-	XC6223D30BGR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SP	-	MIC5371-3.3/3.0YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.0V±2%, 150mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
9SP	-	XC6223D31BGR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SR	-	XC6223D32BGR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SS	-	MIC5371-3.3/3.3YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±2%, 150mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
9SS	-	XC6223D33BGR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9ST	-	XC6223D34BGR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SU	-	XC6223D35BGR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SV	-	XC6223D36BGR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SX	-	XC6223D37BGR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SY	-	XC6223D38BGR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9SZ	-	XC6223D39BGR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
9T	-	RP111L211D	LVR-IC	LDO, 2.1V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9T	-	RP202K251D	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9T	-	XC6221A2517R	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9T	-	XC6223B34B9R-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9T2	-	XC6223E121GR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9T3	-	XC6223E131GR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9T4	-	XC6223E141GR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9T5	-	XC6223E151GR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9T6	-	XC6223E161GR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9T7	-	XC6223E171GR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9T8	-	XC6223E181GR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9T9	-	XC6223E191GR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TA	-	XC6223E201GR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TB	-	XC6223E211GR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TC	-	XC6223E221GR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TD	-	XC6223E231GR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TE	-	XC6223E241GR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TF	-	XC6223E251GR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TH	-	XC6223E261GR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TK	-	XC6223E271GR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TL	-	XC6223E281GR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TM	-	XC6223E291GR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TN	-	XC6223E301GR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TP	-	XC6223E311GR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TR	-	XC6223E321GR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TS	-	XC6223E331GR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TT	-	XC6223E341GR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TU	-	XC6223E351GR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TV	-	XC6223E361GR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TX	-	XC6223E371GR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TY	-	XC6223E381GR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9TZ	-	XC6223E391GR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9U	-	RP111L221D	LVR-IC	LDO, 2.2V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9U	-	RP202K261D	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9U	-	XC6221A2617R	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9U	-	XC6223B35B9R-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9U0	-	XC6223E401GR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9V	-	RP111L231D	LVR-IC	LDO, 2.3V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9V	-	RP202K271D	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9V	-	XC6221A2717R	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9V	-	XC6223B36B9R-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9V2	-	XC6223E12BGR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9V3	-	XC6223E13BGR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9V4	-	XC6223E14BGR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9V5	-	XC6223E15BGR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9V6	-	XC6223E16BGR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9V7	-	XC6223E17BGR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9V8	-	XC6223E18BGR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9V9	-	XC6223E19BGR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VA	-	XC6223E20BGR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VB	-	XC6223E21BGR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VC	-	XC6223E22BGR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VD	-	XC6223E23BGR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VE	-	XC6223E24BGR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VF	-	XC6223E25BGR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VH	-	XC6223E26BGR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VK	-	XC6223E27BGR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VL	-	XC6223E28BGR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VM	-	XC6223E29BGR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VN	-	XC6223E30BGR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VP	-	XC6223E31BGR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VR	-	XC6223E32BGR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VS	-	XC6223E33BGR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VT	-	XC6223E34BGR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VU	-	XC6223E35BGR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VV	-	XC6223E36BGR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VX	-	XC6223E37BGR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VY	-	XC6223E38BGR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9VZ	-	XC6223E39BGR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, ICP	USP-4	45vm	VR4	9a	Tor
9W	-	BZT52C36LP	Z-diode	24V±5%, Izt=5mA, Zzt=70 Ohm, 250mW	DFN1006-2	13d	-	2a	Di
9W	-	BZT52C36LP	Z-diode	24V±5%, Izt=5mA, Zzt=70 Ohm, 250mW	DFN1006-2	13d	-	2b	Di
9W	-	RP111L241D	LVR-IC	LDO, 2.4V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9W	-	RP202K281D	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9X	-	BZT52C39LP	Z-diode	24V±5%, Izt=2mA, Zzt=130 Ohm, 250mW	DFN1006-2	13d	-	2b	Di
9X	-	BZT52C39LP	Z-diode	24V±5%, Izt=2mA, Zzt=90 Ohm, 250mW	DFN1006-2	13d	-	2a	Di
9X	-	RP111L251D	LVR-IC	LDO, 2.5V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9X	-	RP202K291D	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9X	-	XC6221A2817R	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9X	-	XC6223B37B9R-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9X2	-	XC6223F121GR-G	LVR-IC	LDO, 1.2V±20mV, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9X3	-	XC6223F131GR-G	LVR-IC	LDO, 1.3V±20mV, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9X4	-	XC6223F141GR-G	LVR-IC	LDO, 1.4V±20mV, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9X5	-	XC6223F151GR-G	LVR-IC	LDO, 1.5V±20mV, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9X6	-	XC6223F161GR-G	LVR-IC	LDO, 1.6V±20mV, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9X7	-	XC6223F171GR-G	LVR-IC	LDO, 1.7V±20mV, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9X8	-	XC6223F181GR-G	LVR-IC	LDO, 1.8V±20mV, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9X9	-	XC6223F191GR-G	LVR-IC	LDO, 1.9V±20mV, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XA	-	XC6223F201GR-G	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XB	-	XC6223F211GR-G	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XC	-	XC6223F221GR-G	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XD	-	XC6223F231GR-G	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XE	-	XC6223F241GR-G	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XF	-	XC6223F251GR-G	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XH	-	XC6223F261GR-G	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XK	-	XC6223F271GR-G	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XL	-	XC6223F281GR-G	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XM	-	XC6223F291GR-G	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XN	-	XC6223F301GR-G	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XP	-	XC6223F311GR-G	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XR	-	XC6223F321GR-G	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XS	-	XC6223F331GR-G	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XT	-	XC6223F341GR-G	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XU	-	XC6223F351GR-G	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XV	-	XC6223F361GR-G	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XX	-	XC6223F371GR-G	LVR-IC	LDO, 3.7V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9XY	-	XC6223F381GR-G	LVR-IC	LDO, 3.8V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
9XZ	-	XC6223F391GR-G	LVR-IC	LDO, 3.9V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9Y	-	BZT52C5V1LP	Z-diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 250mW	DFN1006-2	13d	-	2b	Di
9Y	-	BZT52C5V1LP	Z-diode	5.1V±5%, Izt=5mA, Zzt=60Ω, 250mW	DFN1006-2	13d	-	2a	Di
9Y	-	RP111L261D	LVR-IC	LDO, 2.6V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9Y	-	RP202K301D	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9Y	-	XC6221A2917R	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9Y	-	XC6223B38B9R-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9Y0	-	XC6223F401GR-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9Z	-	RP111L271D	LVR-IC	LDO, 2.7V±0.8%, 500mA, +CE, CL	DFN1212-6	65e6	VR6a	9a	Ric
9Z	-	RP202K311D	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
9Z	-	XC6221A3017R	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
9Z	-	XC6223B39B9R-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
9Z2	-	XC6223F12BGR-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9Z3	-	XC6223F13BGR-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9Z4	-	XC6223F14BGR-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9Z5	-	XC6223F15BGR-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9Z6	-	XC6223F16BGR-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9Z7	-	XC6223F17BGR-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9Z8	-	XC6223F18BGR-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9Z9	-	XC6223F19BGR-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZA	-	XC6223F20BGR-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZB	-	XC6223F21BGR-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZC	-	XC6223F22BGR-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZD	-	XC6223F23BGR-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZE	-	XC6223F24BGR-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZF	-	XC6223F25BGR-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZH	-	XC6223F26BGR-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZK	-	XC6223F27BGR-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZL	-	XC6223F28BGR-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZM	-	XC6223F29BGR-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZN	-	XC6223F30BGR-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZP	-	XC6223F31BGR-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZR	-	XC6223F32BGR-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZS	-	XC6223F33BGR-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZT	-	XC6223F34BGR-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZU	-	XC6223F35BGR-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZV	-	XC6223F36BGR-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZX	-	XC6223F37BGR-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZY	-	XC6223F38BGR-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
9ZZ	-	XC6223F39BGR-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL, ICP	USP-4	45vm	VR4	9a	Tor
A	-	AOZ8831DI-05	TVS	Vrwm=5V, Vbr<6V, 2A, 40W(<20µs), Bidir.	SOD-882	13ba	-	2ba	Aom
A	-	MAV-11SM	MMIC	RF amplifier, 50MHz..8GHz, 9dB (50Ω)	LLP-X	36aa	A1	9a	Mc
A	-	UNRL111	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=10k/10k	ML4	31tm	-	2b	Pan
A	-	UNRL211	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=10k/10k	ML4	31tm	-	2b	Pan
A0	-	R3118K061A	Vdet-IC	0.6V±22.5mV, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
A0	-	XC9244A08C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 0.8V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
A00	-	74AHC2G00GD	CMOS-Log	Dual 2-input NAND gates	SOT996-2	54	Log50	9z	Nxp
A04	-	74AHC3G04GD	CMOS-Log	Triple inverters	SOT996-2	54	Log56	9z	Nxp
A08	-	74AHC2G08GD	CMOS-Log	Dual 2-input AND gates	SOT996-2	54	Log51	9z	Nxp
A1	-	BZX884-B2V4	Z-diode	2.4V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
A1	-	R3118K071A	Vdet-IC	0.7V±22.5mV, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
A1	-	XC6504A1117R-G	LVR-IC	LDO, 1.1V±20mV, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
A1	-	XC9244A09C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 0.9V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
A10	-	CP2210LC	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/3Ω), shutdown	BGA-9	39	AFP45	9a	Cpm
A10LD	-	CP2210LQ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/4Ω), shutdown	DFN-8	92	AFP24	9a	Cpm
A12	-	CP2212LC	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x3W(5V/4Ω), shutdown	BGA-16	39	AFP46	9a	Cpm
A12LQ20	-	CP2212LQ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x3W(5V/4Ω), shutdown	QFN-20	38	-	9a	Cpm
A15	-	CP2215LC	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/3Ω), shutdown	BGA-9	39	AFP45	9a	Cpm
A15	-	SSM2302CPZ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x1.4W(5V/4Ω), shutdown	CP-16	37	-	9a	Ad
A15LD	-	CP2215LQ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/4Ω), shutdown	DFN-8	92	AFP48	9a	Cpm
A18	-	TK71818CB	LVR-IC	LDO, 1.8V±1.5%, 200mA, +CE	FC-5	64be*	VR7	9c	Tok
A1C	-	SSM2301CPZ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 1.4W(5V/8Ω), shutdown	CP-8	37	-	9a	Ad
A1G	-	SSM2311CBZ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/3Ω), shutdown	BGA-9	39	AFP45	9a	Ad
a2	-	74AUP1G3208GF	CMOS-Log	3-input OR-AND gate	SOT891	52	Log46	9z	Nxp
a2	-	74AUP1G3208GM	CMOS-Log	3-input OR-AND gate	SOT886	57	Log46	9z	Nxp
A2	-	AUD5999QF08	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(5V/4Ω), shutdown	LQ-8	77	-	9a	Axp
A2	-	BZX884-B2V7	Z-diode	2.7V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
A2	-	LM4665ITL	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	-	9a	Nsc
A2	-	R3118K081A	Vdet-IC	0.8V±22.5mV, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
A2	-	XC6223C12B9R-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A2	-	XC6504A1217R-G	LVR-IC	LDO, 1.2V±20mV, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
A2	-	XC9244A10C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.0V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
A20	-	APA2010HA	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 3W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Anp
A20	-	TK71820CB	LVR-IC	LDO, 2.0V±1.5%, 200mA, +CE	FC-5	64be*	VR7	9c	Tok
A2011	-	EUA2011J	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/4Ω), shutdown	DFN-8	92	AFP24	9a	Eut
A2012	-	EUA2012J	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 2.7W(5V/4Ω), shutdown	TQFN-20	38a5	-	9a	Eut
A2014	-	EUA2014J	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 2.5W(5V/4Ω), 3D, shutdown	TQFN-24	38a5	-	9a	Eut
A21	-	APA2010AHA	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 3W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Anp
A25	-	74AHC2G125GD	CMOS-Log	Dual bus buffer with 3-state output	SOT996-2	54	Log54	9z	Nxp
A25	-	TK71825CB	LVR-IC	LDO, 2.5V±1.5%, 200mA, +CE	FC-5	64be*	VR7	9c	Tok
A2510	-	EUA2510J	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 2.7W(5V/4Ω), shutdown	TDFN-14	37	-	9a	Eut
A26	-	74AHC2G126GD	CMOS-Log	Dual bus buffer with 3-state output	SOT996-2	54	Log55	9z	Nxp
A27	-	TK71827CB	LVR-IC	LDO, 2.7V±1.5%, 200mA, +CE	FC-5	64be*	VR7	9c	Tok
A28	-	TK71828CB	LVR-IC	LDO, 2.8V±1.5%, 200mA, +CE	FC-5	64be*	VR7	9c	Tok
A29	-	TK71829CB	LVR-IC	LDO, 2.9V±1.5%, 200mA, +CE	FC-5	64be*	VR7	9c	Tok
A2A	-	NLMD5820M	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 2.65W(5V/4Ω), shutdown	DFN-16	37	-	9o	Ons
a2P	-	74AUP2G157GM	CMOS-Log	2-input multiplexer	SOT902-1	51	Log66	9z	Nxp
a2P	-	74AUP2G157GT	CMOS-Log	2-input multiplexer	SOT833-1	53	Log66	9z	Nxp
A3	-	BZX884-B3V0	Z-diode	3V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
A3	-	R3118K091A	Vdet-IC	0.9V±22.5mV, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
A3	-	XC6223C13B9R-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
A3	-	XC6504A1317R-G	LVR-IC	LDO, 1.3V±20mV, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
A3	-	XC9244A11C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.1V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
A30	-	TK71830CB	LVR-IC	LDO, 3.0V±1.5%, 200mA, +CE	FC-5	64be*	VR7	9c	Tok
A31	-	TK71831CB	LVR-IC	LDO, 3.1V±1.5%, 200mA, +CE	FC-5	64be*	VR7	9c	Tok
A32	-	74AHC2G32GD	CMOS-Log	Dual 2-input OR gates	SOT996-2	54	Log52	9z	Nxp
A33	-	TK71833CB	LVR-IC	LDO, 3.3V±1.5%, 200mA, +CE	FC-5	64be*	VR7	9c	Tok
a38	-	74AUP2G38GM	CMOS-Log	Dual 2-input NAND gate (ODO)	SOT902-1	51	Log62	9z	Nxp
a38	-	74AUP2G38GT	CMOS-Log	Dual 2-input NAND gate (ODO)	SOT833-1	53	Log62	9z	Nxp
a4	-	74AUP1Z04GF	CMOS-Log	X-tal driver with enable and internal resistor	SOT891	52	Log76	9z	Nxp
a4	-	74AUP1Z04GM	CMOS-Log	X-tal driver with enable and internal resistor	SOT886	57	Log76	9z	Nxp
a4	-	74AUP1Z04GN	CMOS-Log	X-tal driver with enable and internal resistor	SOT1115	52	Log76	9z	Nxp
a4	-	74AUP1Z04GS	CMOS-Log	X-tal driver with enable and internal resistor	SOT1202	52	Log76	9z	Nxp
A4	-	BZX884-B3V3	Z-diode	3.3V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
A4	-	CHN222T1PT	Si-diode	Dual, Sw, 80V, 100mA, Vf<1.2V(100mA), 4ns	FBPT-523	17dg	-	9d	Chm
A4	-	LM4838ITL	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(5V/4Ω), volime control	BGA-36	39	-	9a	Nsc
A4	-	R3118K101A	Vdet-IC	1.0V±22.5mV, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
A4	-	XC6223C14B9R-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
A4	-	XC6504A1417R-G	LVR-IC	LDO, 1.4V±20mV, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
A4	-	XC9244A12C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.2V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
A41	-	74AHC2G241GD	CMOS-Log	Dual bus buffer non-inverted with 3-state output	SOT996-2	54	Log60	9z	Nxp
A4886D	-	AUD4886D14-4	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x2W(5V /4Ω), shutdown	DFN-14	37	-	9a	Axp
A4890	-	EUA4890J	Lin-IC	AF PA, BTL, 3..5.5V, 1W(5V/8Ω), shutdown	DFN-8	92	AFP12	9a	Eut
A4988AD	-	AUD4988AD14-4	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x2W(5V /4Ω), shutdown	DFN-14	37	AFP49	9a	Axp
A4988BD	-	AUD4988BD14-4	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x2W(5V /4Ω), shutdown	DFN-14	37	AFP49	9a	Axp
A4988CD	-	AUD4988CD14-4	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x2W(5V /4Ω), shutdown	DFN-14	37	AFP49	9a	Axp
A4988DD	-	AUD4988DD14-4	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x2W(5V /4Ω), shutdown	DFN-14	37	AFP49	9a	Axp
A4988ED	-	AUD4988ED14-4	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x2W(5V /4Ω), shutdown	DFN-14	37	AFP49	9a	Axp
A4990D	-	AUD4990D10-3	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(5V/4Ω), select shutdown	DFN-10	37	AFP50	9a	Axp
A4990D	-	AUD4990D10-4	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(5V/4Ω), select shutdown	DFN-10-4	37	AFP50	9a	Axp
A4990D	-	LY8892BB	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(5V/4Ω), shutdown	DFN-10	37	AFP26	9a	Ltk
A4991D	-	AUD4991D10-3	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(5V /4Ω), select shutdown	DFN-10	37	AFP50	9a	Axp
A4992	-	EUA4992J	Lin-IC	AF PA, BTL, 2.2..5.5V, 2x2.5W(5V/4Ω), shutdown	TQFN-16	38a5	-	9a	Eut
A4992D	-	AUD4992D14-4	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x2W(5V/4Ω), shutdown	DFN-14	37	-	9a	Axp
A4995	-	EUA4995J	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.36W(5V/4Ω), shutdown	TDFN-8	37	AFP22	9a	Eut
A4996	-	EUA4996J	Lin-IC	AF PA, BTL, 2.5..5.5V, 2x2.5W(5V/4Ω), shutdown	TQFN-16	38a5	-	9a	Eut
A5	-	BZX884-B3V6	Z-diode	3.6V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
A5	-	R3118K111A	Vdet-IC	1.1V±22.5mV, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
A5	-	XC6223C15B9R-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
A5	-	XC6504A1517R-G	LVR-IC	LDO, 1.5V±20mV, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
A5	-	XC9244A13C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.3V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
A5004	-	AUD5004D10-3	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(5V/4Ω), select shutdown	DFN-10	37	-	9a	Axp
A5006D	-	AUD5006D14-4	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x2W(5V/4Ω), mute, shutdown	DFN-14	37	-	9a	Axp
A5011D	-	AUD5011D14-4	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x2W(5V/4Ω), shutdown	DFN-14	37	-	9a	Axp
A5012Q	-	AUD5012QF24	Lin-IC	AF PA, BTL, 4.5..5.5V, 2x2W(5V/3Ω), shutdown, Up/Dwn volume	QFN-24	38	-	9a	Axp
A5013	-	AUD5013D14-4	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x2W(5V/4Ω), shutdown	DFN-14	37	-	9a	Axp
A5020Q	-	AUD5020QF16	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 2.5W(5V/4Ω), shutdown	QFN-16	38	-	9a	Axp
A51	-	TS4851IJT	Lin-IC	AF PA, BTL, 3..5.5V, 1W(5V/8Ω)+2x80mW(5V/32Ω)	BGA-18	39	-	9a	Ste
A5980D	-	AUD5980D14-4	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x2W(5V/4Ω), shutdown	DFN-14	37	AFP49	9a	Axp
A5982Q	-	AUD5982QF24	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x2W(5V/4Ω), shutdown	QFN-24	38	-	9a	Axp

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A5992D	-	AUD5992D14-4	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x2W(5V/4Ω), shutdown	DFN-14	37	-	9a	Axp
A6	-	BAS16-02L	Si-diode	Sw, Fast, 80V, 200mA, 250mW, <6ns	TSLP-2-1	13d	-	2b	Inf
A6	-	BAS16-07L4	Si-diode	Dual, Sw, Fast, 80V, 200mA, 250mW, <6ns	TSLP-4-4	31ce	-	2b	Inf
A6	-	BL6203ITL	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	BGA-8A	39	AFP47	9a	Shb
A6	-	BZX884-B3V9	Z-diode	3.9V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
A6	-	R3118K121A	Vdet-IC	1.2V±22.5mV, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
A6	-	XC6223C16B9R-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
A6	-	XC6504A1617R-G	LVR-IC	LDO, 1.6V±20mV, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
A6	-	XC9244A14C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.4V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
A6	-	XPT4990ITL	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), shutdown	BGA-8A	39	AFP44	9m	Xpt
A61LQ	-	CP2261LQ	Lin-IC	AF PA, BTL, 2.5..5.5V, 2x2.8W(5V/3Ω), shutdown	QFN-16	38	-	9a	Cpm
A6201	-	EUA6201J	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.36W(5V/8Ω), shutdown	TDFN-8	37	AFP22	9a	Eut
A6204	-	EUA6204J	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.6W(5V/8Ω), shutdown	DFN-8	92	AFP22	9a	Eut
A6G	-	BL6203GITL	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	BGA-8A	39	AFP47	9a	Shb
A6G	-	CP2203GITL	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	BGA-8A	39	AFP47	9a	Cpm
a7	-	74AUP1T57GF	CMOS-Log	Configurable gate with voltage-level translator	SOT891	52	Log79	9z	Nxp
a7	-	74AUP1T57GM	CMOS-Log	Configurable gate with voltage-level translator	SOT886	57	Log79	9z	Nxp
A7	-	BZX884-B4V3	Z-diode	4.3V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
A7	-	R3118K131A	Vdet-IC	1.3V±22.5mV, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
A7	-	XC6223C17B9R-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
A7	-	XC6504A1717R-G	LVR-IC	LDO, 1.7V±20mV, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
A7	-	XC9244A15C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.5V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
A72	-	APA0712HA	Lin-IC	AF PA, BTL, 2.6..5.5V, 1.4W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Anp
A73	-	TS4973IJT	Lin-IC	AF PA, BTL, 2.8..5.5V, 1.2W(5V/8Ω), shutdown	BGA-9	39	-	9a	Ste
A74	-	TS4974IQT	Lin-IC	AF PA, BTL, 2.5..5.5V, 1W(5V/8Ω), shutdown	DFN-10	37	-	9a	Ste
A75	-	TS4975EIJT	Lin-IC	AF PA, 2.5..5.5V, 2x102mW(5V/16Ω), shutdown	BGA-16	39	-	9a	Ste
a8	-	74AUP1T58GF	CMOS-Log	Configurable gate with voltage-level translator	SOT891	52	Log80	9z	Nxp
a8	-	74AUP1T58GM	CMOS-Log	Configurable gate with voltage-level translator	SOT886	57	Log80	9z	Nxp
A8	-	BZX884-B4V7	Z-diode	4.7V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
A8	-	R3118K141A	Vdet-IC	1.4V±22.5mV, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
A8	-	SH4890ITL	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Sit
A8	-	XC6223C18B9R-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
A8	-	XC6504A1817R-G	LVR-IC	LDO, 1.8V±20mV, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
A8	-	XC6GC0802HR	Vdet-IC	0.8V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
A8	-	XC9244A16C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.6V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
A83	-	XC61GC0802HR	Vdet-IC	0.8V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
A84	-	TS4984EIJT	Lin-IC	AF PA, BTL, 2.2..5.5V, 2x1.2W(5V/4Ω), shutdown	BGA-15	39	-	9a	Ste
A84	-	TS4984FC	Lin-IC	AF PA, BTL, 2.2..5.5V, 2x1.2W(5V/4Ω), shutdown	BGA-15	39	-	9a	Ste
A85	-	TS4985EIJT	Lin-IC	AF PA, BTL, 2.5..5.5V, 2x1.2W(5V/8Ω), shutdown	BGA-15	39	-	9a	Ste
A8A	-	XC6108C08AGR	Vdet-IC	0.8V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
A8B	-	XC6108C08BGR	Vdet-IC	0.8V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
A8C	-	XC6108C08CGR	Vdet-IC	0.8V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
A8D	-	XC6108C08DGR	Vdet-IC	0.8V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
A8G	-	CP2290GITL	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Cpm
a9	-	74AUP1G98GF	CMOS-Log	Configurable multiple function gate	SOT891	52	Log82	9z	Nxp
a9	-	74AUP1G98GM	CMOS-Log	Configurable multiple function gate	SOT886	57	Log82	9z	Nxp
A9	-	BZX884-B5V1	Z-diode	5.1V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
A9	-	LM4855ITL	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.1W(4Ω+2x115mW(8Ω), SPI	BGA-20	39	-	9a	Nsc
A9	-	R3118K151A	Vdet-IC	1.5V±22.5mV, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
A9	-	XC6223C19B9R-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
A9	-	XC6504A1917R-G	LVR-IC	LDO, 1.9V±20mV, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
A9	-	XC6GC0902HR	Vdet-IC	0.9V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
A9	-	XC9244A17C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.7V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
A90	-	TS4990IJT	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Ste
A93	-	XC61GC0902HR	Vdet-IC	0.9V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
A94	-	TS4994EIJT	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), select shutdown	BGA-9	39	AFP53	9a	Ste
A94	-	TS4994EIKJT	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), select shutdown	BGA-9	39	AFP53	9a	Ste
A94	-	TS4994FC	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), select shutdown	BGA-9	39	AFP53	9a	Ste
A94	-	TS4994IJT	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), select shutdown	BGA-9	39	AFP53	9a	Ste
A9A	-	XC6108C09AGR	Vdet-IC	0.9V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
A9B	-	XC6108C09BGR	Vdet-IC	0.9V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
A9C	-	XC6108C09CGR	Vdet-IC	0.9V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
A9D	-	XC6108C09DGR	Vdet-IC	0.9V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
aA	-	74AUP2G34GF	CMOS-Log	Dual non-inverter buffers	SOT891	52	Log23	9z	Nxp
aA	-	74AUP2G34GM	CMOS-Log	Dual non-inverter buffers	SOT886	57	Log23	9z	Nxp
AA	-	BA892-02L	PIN-diode	VHF, TV-B-sw, 35V, 0.1A, Vf<1V(100mA), 1.4pF, <120ns	TSLP-2-1	13d	-	2b	Inf
AA	-	BU15TA2WNVX	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	SSON004X1216	110vm	VR4	9mc	Rhm
AA	-	BZX884-B5V6	Z-diode	5.6V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
AA	-	GDZ4.7	Z-diode	4.42..4.90V, Izt=5.0mA, 100mW	GMD2	13d	-	2w	Rhm
AA	-	LY8010CL	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 3W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Ltk



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AA	-	LY8210CL	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 2x2.5W(5V/4Ω), separate shutdown	BGA-18	39	-	9a	Ltk
AA	-	MIC2211-ADJ/ADJBML	LVR-IC	LDO, Dual out, Vo1/Vo2=Adj.1.5..10V(150mA)/Adj.1.5..10V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
AA	-	RP104K121B	LVR-IC	LDO, 1.2V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AA	-	RP105K061B	LVR-IC	LDO, 0.6V±15mV, 400mA, +CE	DFN1212-6	52zd	VR11	9a	Ric
AA	-	SiP21108DVP-T1-E3	LVR-IC	LDO, Adjustable, 1.2..4.6V±1%, 150mA, +CE	TSC75-6L	91d3	VR16	9m	Vs
AA	-	XC6223C20B9R-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AA	-	XC6504A2017R-G	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AA	-	XC6504A3117R-G	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AA	-	XC9244A18C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.8V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AA-	-	RT9013-12PQV	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	WDFN-8	49	VR4	9a	Rct
AA0	-	XC6501A3117R-G	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AA0	-	XC6501A311GR-G	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AA01	-	RP150K001B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA02	-	RP150K002B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=3V/3V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA03	-	RP150K003B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA04	-	RP150K004B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=2.5V/1.8V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA05	-	RP150K005B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA06	-	RP150K006B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA07	-	RP150K007B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA08	-	RP150K008B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA09	-	RP150K009B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA1	-	XC6501A3217R-G	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AA1	-	XC6501A321GR-G	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AA10	-	RP150K010B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=3.3V/3V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA11	-	RP150K011B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA116	-	XC6113A116ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA117	-	XC6113A117ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA118	-	XC6113A118ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA119	-	XC6113A119ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA12	-	RP150K012B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=2.7V/3/3V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA120	-	XC6113A120ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA121	-	XC6113A121ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA122	-	XC6113A122ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA123	-	XC6113A123ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA124	-	XC6113A124ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA125	-	XC6113A125ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA126	-	XC6113A126ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA127	-	XC6113A127ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA128	-	XC6113A128ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA129	-	XC6113A129ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA13	-	RP150K013B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=1.7V/1.8V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA130	-	XC6113A130ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA131	-	XC6113A131ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA132	-	XC6113A132ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA133	-	XC6113A133ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA134	-	XC6113A134ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA135	-	XC6113A135ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA136	-	XC6113A136ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA137	-	XC6113A137ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA138	-	XC6113A138ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA139	-	XC6113A139ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA14	-	RP150K014B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA140	-	XC6113A140ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA141	-	XC6113A141ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA142	-	XC6113A142ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA143	-	XC6113A143ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA144	-	XC6113A144ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA145	-	XC6113A145ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA146	-	XC6113A146ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA147	-	XC6113A147ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA148	-	XC6113A148ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA149	-	XC6113A149ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA15	-	RP150K015B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA150	-	XC6113A150ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA16	-	RP150K016B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=2.8V/3V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA17	-	RP150K017B	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=1.8V/3V±1%, 300mA, +CE, CL	PLP2020-8	75yv	VR19	9b	Ric
AA2	-	XC6501A3317R-G	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AA2	-	XC6501A331GR-G	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AA216	-	XC6113A216ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA217	-	XC6113A217ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AA218	-	XC6113A218ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA219	-	XC6113A219ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA220	-	XC6113A220ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA221	-	XC6113A221ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA222	-	XC6113A222ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA223	-	XC6113A223ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA224	-	XC6113A224ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA225	-	XC6113A225ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA226	-	XC6113A226ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA227	-	XC6113A227ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA228	-	XC6113A228ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA229	-	XC6113A229ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA230	-	XC6113A230ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA231	-	XC6113A231ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA232	-	XC6113A232ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA233	-	XC6113A233ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA234	-	XC6113A234ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA235	-	XC6113A235ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA236	-	XC6113A236ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA237	-	XC6113A237ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA238	-	XC6113A238ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA239	-	XC6113A239ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA240	-	XC6113A240ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA241	-	XC6113A241ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA242	-	XC6113A242ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA243	-	XC6113A243ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA244	-	XC6113A244ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA245	-	XC6113A245ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA246	-	XC6113A246ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA247	-	XC6113A247ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA248	-	XC6113A248ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA249	-	XC6113A249ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA250	-	XC6113A250ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA3	-	XC6501A3417R-G	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AA3	-	XC6501A341GR-G	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AA316	-	XC6113A316ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA317	-	XC6113A317ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA318	-	XC6113A318ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA319	-	XC6113A319ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA320	-	XC6113A320ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA321	-	XC6113A321ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA322	-	XC6113A322ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA323	-	XC6113A323ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA324	-	XC6113A324ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA325	-	XC6113A325ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA326	-	XC6113A326ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA327	-	XC6113A327ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA328	-	XC6113A328ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA329	-	XC6113A329ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA330	-	XC6113A330ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA331	-	XC6113A331ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA332	-	XC6113A332ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA333	-	XC6113A333ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA334	-	XC6113A334ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA335	-	XC6113A335ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA336	-	XC6113A336ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA337	-	XC6113A337ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA338	-	XC6113A338ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA339	-	XC6113A339ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA340	-	XC6113A340ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA341	-	XC6113A341ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA342	-	XC6113A342ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA343	-	XC6113A343ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA344	-	XC6113A344ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA345	-	XC6113A345ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA346	-	XC6113A346ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA347	-	XC6113A347ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA348	-	XC6113A348ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA349	-	XC6113A349ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA350	-	XC6113A350ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AA4	-	XC6501A3517R-G	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AA4	-	XC6501A351GR-G	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AA416	-	XC6113A416ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA417	-	XC6113A417ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA418	-	XC6113A418ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA419	-	XC6113A419ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA420	-	XC6113A420ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA421	-	XC6113A421ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA422	-	XC6113A422ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA423	-	XC6113A423ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA424	-	XC6113A424ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA425	-	XC6113A425ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA426	-	XC6113A426ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA427	-	XC6113A427ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA428	-	XC6113A428ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA429	-	XC6113A429ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA430	-	XC6113A430ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA431	-	XC6113A431ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA432	-	XC6113A432ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA433	-	XC6113A433ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA434	-	XC6113A434ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA435	-	XC6113A435ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA436	-	XC6113A436ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA437	-	XC6113A437ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA438	-	XC6113A438ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA439	-	XC6113A439ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA440	-	XC6113A440ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA441	-	XC6113A441ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA442	-	XC6113A442ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA443	-	XC6113A443ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA444	-	XC6113A444ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA445	-	XC6113A445ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA446	-	XC6113A446ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA447	-	XC6113A447ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA448	-	XC6113A448ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA449	-	XC6113A449ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA450	-	XC6113A450ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA5	-	XC6501A3617R-G	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AA5	-	XC6501A361GR-G	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AA516	-	XC6113A516ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA517	-	XC6113A517ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA518	-	XC6113A518ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA519	-	XC6113A519ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA520	-	XC6113A520ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA521	-	XC6113A521ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA522	-	XC6113A522ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA523	-	XC6113A523ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA524	-	XC6113A524ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA525	-	XC6113A525ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA526	-	XC6113A526ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA527	-	XC6113A527ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA528	-	XC6113A528ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA529	-	XC6113A529ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA530	-	XC6113A530ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA531	-	XC6113A531ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA532	-	XC6113A532ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA533	-	XC6113A533ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA534	-	XC6113A534ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA535	-	XC6113A535ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA536	-	XC6113A536ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA537	-	XC6113A537ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA538	-	XC6113A538ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA539	-	XC6113A539ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA540	-	XC6113A540ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA541	-	XC6113A541ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA542	-	XC6113A542ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA543	-	XC6113A543ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA544	-	XC6113A544ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA545	-	XC6113A545ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA546	-	XC6113A546ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AA547	-	XC6113A547ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA548	-	XC6113A548ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA549	-	XC6113A549ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA550	-	XC6113A550ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA6	-	XC6501A3717R-G	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AA6	-	XC6501A371GR-G	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AA616	-	XC6113A616ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA617	-	XC6113A617ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA618	-	XC6113A618ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA619	-	XC6113A619ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA620	-	XC6113A620ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA621	-	XC6113A621ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA622	-	XC6113A622ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA623	-	XC6113A623ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA624	-	XC6113A624ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA625	-	XC6113A625ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA626	-	XC6113A626ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA627	-	XC6113A627ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA628	-	XC6113A628ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA629	-	XC6113A629ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA630	-	XC6113A630ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA631	-	XC6113A631ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA632	-	XC6113A632ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA633	-	XC6113A633ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA634	-	XC6113A634ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA635	-	XC6113A635ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA636	-	XC6113A636ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA637	-	XC6113A637ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA638	-	XC6113A638ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA639	-	XC6113A639ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA640	-	XC6113A640ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA641	-	XC6113A641ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA642	-	XC6113A642ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA643	-	XC6113A643ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA644	-	XC6113A644ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA645	-	XC6113A645ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA646	-	XC6113A646ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA647	-	XC6113A647ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA648	-	XC6113A648ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA649	-	XC6113A649ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA650	-	XC6113A650ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xh	VD17	9b	Tor
AA7	-	XC6501A3817R-G	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AA7	-	XC6501A381GR-G	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AA8	-	XC6501A3917R-G	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AA8	-	XC6501A391GR-G	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AA8	-	XC9260A08CER-G	DC-DC-IC	PWM step-down, 0.8V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AA9	-	XC6501A4017R-G	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AA9	-	XC6501A401GR-G	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AA9	-	XC9260A09CER-G	DC-DC-IC	PWM step-down, 0.9V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AAA	-	MAX4368ETA	Lin-IC	AF PA, BTL, 2.3..5.5V, 330mW(5V/32Ω), shutdown	DFN-8	92	AFP27	9m	Max
AAA	-	MAX98303EWE+	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 2x3.1W(5V/4Ω), shutdown	BGA-16	39	-	9m	Max
AAA	-	TC1302AAAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAA	-	XC6501A4117R-G	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AAA	-	XC6501A411GR-G	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AAAA	-	TC1301AAAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAAB	-	TC1301AAABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAAC	-	TC1301AAACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAAD	-	TC1301AAADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAAE	-	TC1301AAAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAAF	-	TC1301AAAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAB	-	MAX4367ETA	Lin-IC	AF PA, BTL, 2.3..5.5V, 330mW(5V/32Ω), shutdown	DFN-8	92	AFP27	9m	Max
AAB	-	TC1302AABVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAB	-	XC6501A4217R-G	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AAB	-	XC6501A421GR-G	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AABA	-	TC1301AABAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AABB	-	TC1301AABBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AABC	-	TC1301AABCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AABD	-	TC1301AABDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AABE	-	TC1301AABEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AABF	-	TC1301AABFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AAC	-	MAX4366ETA	Lin-IC	AF PA, BTL, 2.3..5.5V, 330mW(5V/32Ω), shutdown	DFN-8	92	AFP12	9m	Max
AAC	-	TC1302AACVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAC	-	XC6501A4317R-G	LVR-IC	LDO, 4.3V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AAC	-	XC6501A431GR-G	LVR-IC	LDO, 4.3V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AACA	-	TC1301AACAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AACB	-	MAX9711ETC	Lin-IC	AF PA, BTL, 4.5..5.5V, 3W(5V/4Ω), shutdown	QFN-12	38	-	9m	Max
AACB	-	TC1301AACBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AACC	-	TC1301AACCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AACD	-	TC1301AACDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AACE	-	TC1301AACEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AACF	-	TC1301AACFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAD	-	TC1302AADVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAD	-	XC6501A4417R-G	LVR-IC	LDO, 4.4V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AAD	-	XC6501A441GR-G	LVR-IC	LDO, 4.4V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AADA	-	TC1301AADAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AADB	-	TC1301AADBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AADC	-	TC1301AADCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AADD	-	TC1301AADDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AADE	-	TC1301AADEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AADF	-	TC1301AADFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AADI	-	TPA6203A1GQV	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	BGA-8A	39	AFP47	9a	Ti
AADZ	-	MAX9721AETC	Lin-IC	AF PA, 0.9..1.8V, 2x20mW(1.9V/32Ω), shutdown	QFN-12	38	AFP58	9m	Max
AAE	-	TC1302AAEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAE	-	XC6501A4517R-G	LVR-IC	LDO, 4.5V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AAE	-	XC6501A451GR-G	LVR-IC	LDO, 4.5V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AAEA	-	MAX9721BETC	Lin-IC	AF PA, 0.9..1.8V, 2x20mW(1.9V/32Ω), shutdown	QFN-12	38	AFP58	9m	Max
AAEA	-	TC1301AAEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAEB	-	MAX9721CETC	Lin-IC	AF PA, 0.9..1.8V, 2x20mW(1.9V/32Ω), shutdown	QFN-12	38	AFP58	9m	Max
AAEB	-	TC1301AAEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAEC	-	TC1301AAECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAED	-	TC1301AAEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAEE	-	TC1301AAEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAEF	-	TC1301AAEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAEI	-	TPA6203A1ZQV	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	BGA-8A	39	AFP47	9a	Ti
AAEW	-	MAX9725AETC	Lin-IC	AF PA, 0.9..1.8V, 2x20mW(1.9V/32Ω), shutdown	QFN-12	38	AFP58	9m	Max
AAEX	-	MAX9725BETC	Lin-IC	AF PA, 0.9..1.8V, 2x20mW(1.9V/32Ω), shutdown	QFN-12	38	AFP58	9m	Max
AAEY	-	MAX9725CETC	Lin-IC	AF PA, 0.9..1.8V, 2x20mW(1.9V/32Ω), shutdown	QFN-12	38	AFP58	9m	Max
AAEZ	-	MAX9725DETC	Lin-IC	AF PA, 0.9..1.8V, 2x20mW(1.9V/32Ω), shutdown	QFN-12	38	AFP58	9m	Max
AAF	-	TC1302AAFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAF	-	XC6501A4617R-G	LVR-IC	LDO, 4.6V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AAF	-	XC6501A461GR-G	LVR-IC	LDO, 4.6V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AAFA	-	TC1301AAFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAFB	-	TC1301AAFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAFC	-	TC1301AAFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAFD	-	TC1301AAFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAFE	-	TC1301AAFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAFF	-	TC1301AAFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAFI	-	TPA2005D1ZQY	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 1.4W(5V/8Ω), shutdown	BGA-15	39	-	9a	Ti
AAG	-	BL6211TLX	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	BGA-9	39	AFP51	9a	Shb
AAG	-	CP2296GITL	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	BGA-9	39	AFP51	9a	Cpm
AAG	-	TC1302AAGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAGA	-	TC1301AAGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAGB	-	TC1301AAGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAGC	-	TC1301AAGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAGD	-	TC1301AAGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAGE	-	TC1301AAGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAGF	-	TC1301AAGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAH	-	TC1302AAHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAH	-	XC6501A4717R-G	LVR-IC	LDO, 4.7V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AAH	-	XC6501A471GR-G	LVR-IC	LDO, 4.7V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AAHA	-	TC1301AAHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAHB	-	TC1301AAHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAHC	-	TC1301AAHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAHD	-	TC1301AAHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAHE	-	TC1301AAHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAHF	-	TC1301AAHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAI	-	MAX9712ETB	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 500mW(5V/8Ω), shutdown	DFN-10	37	AFP55	9m	Max
AAI	-	TC1302AAIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAIA	-	TC1301AAIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAIB	-	TC1301AAIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AAIC	-	TC1301AAICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAID	-	TC1301AAIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAIE	-	TC1301AAIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAIF	-	TC1301AAIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAJ	-	TC1302AAJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAJA	-	TC1301AAJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAJB	-	TC1301AAJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAJC	-	TC1301AAJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAJD	-	TC1301AAJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAJE	-	TC1301AAJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAJF	-	TC1301AAJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAK	-	MAX4366EBL-T	Lin-IC	AF PA, BTL, 2.3..5.5V, 330mW(5V/32Ω), shutdown	BGA-8A	39	AFP44	9m	Max
AAK	-	MAX6410BS33-T	Vdet-IC	3.3V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AAK	-	TC1302AAKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAK	-	XC6501A4817R-G	LVR-IC	LDO, 4.8V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AAK	-	XC6501A481GR-G	LVR-IC	LDO, 4.8V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AAKA	-	TC1301AAKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAKB	-	TC1301AAKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAKC	-	TC1301AAKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAKD	-	TC1301AAKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAKE	-	TC1301AAKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAKF	-	TC1301AAKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAL	-	MAX4367EBL-T	Lin-IC	AF PA, BTL, 2.3..5.5V, 330mW(5V/32Ω), shutdown	BGA-8A	39	-	9m	Max
AAL	-	MAX6410BS34-T	Vdet-IC	3.4V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AAL	-	TC1302AALVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAL	-	XC6501A4917R-G	LVR-IC	LDO, 4.9V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AAL	-	XC6501A491GR-G	LVR-IC	LDO, 4.9V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AAL	-	XC9260A0LCER-G	DC-DC-IC	PWM step-down, 0.85V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AALA	-	TC1301AALAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AALB	-	TC1301AALBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AALC	-	TC1301AALCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AALD	-	TC1301AALDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AALE	-	TC1301AALEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AALF	-	TC1301AALFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAM	-	MAX4368EBL-T	Lin-IC	AF PA, BTL, 2.3..5.5V, 330mW(5V/32Ω), shutdown	BGA-8A	39	-	9m	Max
AAM	-	MAX6410BS35-T	Vdet-IC	3.5V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AAM	-	TC1302AAMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAM	-	XC6501A5017R-G	LVR-IC	LDO, 5.0V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AAM	-	XC6501A501GR-G	LVR-IC	LDO, 5.0V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AAM	-	XC9260A0MCER-G	DC-DC-IC	PWM step-down, 0.95V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AAMA	-	TC1301AAMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAMB	-	TC1301AAMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAMC	-	TC1301AAMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAMD	-	TC1301AAMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAME	-	TC1301AAMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAMF	-	TC1301AAMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAN	-	MAX4369EBL-T	Lin-IC	AF PA, 2.3..5.5V 2x120mW(5V/16Ω)	BGA-9	39	-	9m	Max
AAN	-	MAX6410BS36-T	Vdet-IC	3.6V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AAN	-	TC1302AANVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AANA	-	TC1301AANAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AANB	-	TC1301AANBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AANC	-	TC1301AANCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAND	-	TC1301AANDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AANE	-	TC1301AANEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AANF	-	TC1301AANFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AANI	-	TPA6205A1ZQV	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	BGA-8A	39	AFP47	9a	Ti
AAO	-	MAX6410BS37-T	Vdet-IC	3.7V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AAO	-	TC1302AAOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAOA	-	TC1301AAOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAOB	-	TC1301AAOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAOC	-	TC1301AAOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAOD	-	TC1301AAODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAOE	-	TC1301AAOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAOF	-	TC1301AAOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAOI	-	TPA6205A1DRB	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	DFN-8	92	-	9a	Ti
AAP	-	MAX6410BS38-T	Vdet-IC	3.8V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AAP	-	TC1302AAPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAPA	-	TC1301AAPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAPB	-	TC1301AAPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAPC	-	TC1301AAPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AAPD	-	TC1301AAPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAPE	-	TC1301AAPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAPF	-	TC1301AAPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAQ	-	MAX6410BS39-T	Vdet-IC	3.9V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AAQ	-	TC1302AAQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAQA	-	TC1301AAQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAQB	-	TC1301AAQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAQC	-	TC1301AAQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAQD	-	TC1301AAQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAQE	-	TC1301AAQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAQF	-	TC1301AAQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAR	-	MAX6410BS40-T	Vdet-IC	4.0V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AAR	-	TC1302AARVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AARA	-	TC1301AARAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AARB	-	TC1301AARBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AARC	-	TC1301AARCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AARD	-	TC1301AARDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AARE	-	TC1301AAREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AARF	-	TC1301AARFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAS	-	MAX6410BS41-T	Vdet-IC	4.1V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AAS	-	TC1302AASVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AASA	-	TC1301AASAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AASB	-	TC1301AASBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AASC	-	TC1301AASCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AASD	-	TC1301AASDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AASE	-	TC1301AASEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AASF	-	TC1301AASFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAT	-	MAX6410BS42-T	Vdet-IC	4.2V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AAT	-	MAX9728AETC+	Lin-IC	AF PA, 4.5..5.5V, 2x60mW(5V/32Ω), shutdown	QFN-12	38	-	9m	Max
AAT	-	TC1302AATVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AATA	-	TC1301AATAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AATB	-	TC1301AATBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AATC	-	TC1301AATCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AATD	-	TC1301AATDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AATE	-	TC1301AATEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AATF	-	TC1301AATFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAU	-	MAX6410BS43-T	Vdet-IC	4.3V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AAU	-	MAX9728BETC+	Lin-IC	AF PA, 4.5..5.5V, 2x60mW(5V/32Ω), shutdown	QFN-12	38	-	9m	Max
AAU	-	TC1302AAUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAUA	-	TC1301AAUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAUB	-	TC1301AAUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAUC	-	TC1301AAUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAUD	-	TC1301AAUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAUE	-	TC1301AAUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAUF	-	TC1301AAUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAV	-	MAX6410BS44-T	Vdet-IC	4.4V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AAV	-	MAX9718AETB	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), select shutdown	DFN-10	37	AFP19	9m	Max
AAV	-	TC1302AAVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAVA	-	TC1301AAVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAVB	-	TC1301AAVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAVC	-	TC1301AAVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAVD	-	TC1301AAVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAVE	-	TC1301AAVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAVF	-	TC1301AAVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAW	-	MAX6410BS45-T	Vdet-IC	4.5V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AAW	-	MAX9718BETB	Lin-IC	AF PA, BTL, 2.7..5.5V 1.4W(5V/4Ω), select shutdown	DFN-10	37	AFP20	9m	Max
AAW	-	TC1302AAWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AAWA	-	TC1301AAWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAWB	-	TC1301AAWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAWC	-	TC1301AAWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAWD	-	TC1301AAWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAWE	-	TC1301AAWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAWF	-	TC1301AAWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AAX	-	MAX6410BS46-T	Vdet-IC	4.6V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AAX	-	MAX9718CETB	Lin-IC	AF PA, BTL, 2.7..5.5V 1.4W(5V/4Ω), select shutdown	DFN-10	37	AFP20	9m	Max
AAX	-	MAX9722AETE	Lin-IC	AF PA, 2.4..5.5V, 2x125mW(3V/32Ω), shutdown	QFN-16	38	-	9m	Max
AAY	-	MAX6411BS33-T	Vdet-IC	3.3V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
AAY	-	MAX9718DETB	Lin-IC	AF PA, BTL, 2.7..5.5V 1.4W(5V/4Ω), select shutdown	DFN-10	37	AFP20	9m	Max
AAY	-	MAX9722BETE	Lin-IC	AF PA, 2.4..5.5V, 2x125mW(3V/32Ω), shutdown	QFN-16	38	-	9m	Max
AAZ	-	MAX6411BS34-T	Vdet-IC	3.4V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
aB	-	74AUP1G38GF	CMOS-Log	2-input NAND gate (ODO)	SOT891	52	Log17	9z	Nxp
aB	-	74AUP1G38GM	CMOS-Log	2-input NAND gate (ODO)	SOT886	57	Log17	9z	Nxp
AB	-	BAR50-02L	PIN-diode	RF-att, 50V, 100mA, 250mW, Vf<1.1V(50mA), <0.5pF	TSLP-2-1	13d	-	2b	Inf
AB	-	BU18TA2WNVX	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	SSON004X1216	110vm	VR4	9mc	Rhm
AB	-	BZX884-B6V2	Z-diode	6.2V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
AB	-	RP104K131B	LVR-IC	LDO, 1.3V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AB	-	RP105K071B	LVR-IC	LDO, 0.7V±15mV, 400mA, +CE	DFN1212-6	52zd	VR11	9a	Ric
AB	-	XC6221A12B7R	LVR-IC	LDO, 1.25V±20mV, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AB	-	XC6223C21B9R-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AB	-	XC6504A2117R-G	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AB	-	XC9244A19C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.9V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AB0	-	XC6501B3117R-G	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AB0	-	XC6501B311GR-G	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AB0	-	XC9260A10CER-G	DC-DC-IC	PWM step-down, 1.0V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AB01	-	RP151K001B	LVR/Vdet-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 300mA, +CE, Vdet	DFN2020-8	75	-	9b	Ric
AB02	-	RP151K002B	LVR/Vdet-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 300mA, +CE, Vdet	DFN2020-8	75	-	9b	Ric
AB05	-	RP151K005B	LVR/Vdet-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 300mA, +CE, Vdet	DFN2020-8	75	-	9b	Ric
AB06	-	RP151K006B	LVR/Vdet-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 300mA, +CE, Vdet	DFN2020-8	75	-	9b	Ric
AB1	-	XC6501B3217R-G	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AB1	-	XC6501B321GR-G	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AB1	-	XC9260A11CER-G	DC-DC-IC	PWM step-down, 1.1V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AB2	-	XC6501B3317R-G	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AB2	-	XC6501B331GR-G	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AB2	-	XC9260A12CER-G	DC-DC-IC	PWM step-down, 1.2V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AB216	-	XC6113B216ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB217	-	XC6113B217ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB218	-	XC6113B218ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB219	-	XC6113B219ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB220	-	XC6113B220ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB221	-	XC6113B221ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB222	-	XC6113B222ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB223	-	XC6113B223ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB224	-	XC6113B224ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB225	-	XC6113B225ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB226	-	XC6113B226ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB227	-	XC6113B227ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB228	-	XC6113B228ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB229	-	XC6113B229ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB230	-	XC6113B230ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB231	-	XC6113B231ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB232	-	XC6113B232ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB233	-	XC6113B233ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB234	-	XC6113B234ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB235	-	XC6113B235ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB236	-	XC6113B236ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB237	-	XC6113B237ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB238	-	XC6113B238ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB239	-	XC6113B239ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB240	-	XC6113B240ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB241	-	XC6113B241ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB242	-	XC6113B242ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB243	-	XC6113B243ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB244	-	XC6113B244ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB245	-	XC6113B245ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB246	-	XC6113B246ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB247	-	XC6113B247ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB248	-	XC6113B248ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB249	-	XC6113B249ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB250	-	XC6113B250ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB3	-	XC6501B3417R-G	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AB3	-	XC6501B341GR-G	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AB3	-	XC9260A13CER-G	DC-DC-IC	PWM step-down, 1.3V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AB316	-	XC6113B316ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB317	-	XC6113B317ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB318	-	XC6113B318ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB319	-	XC6113B319ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB320	-	XC6113B320ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB321	-	XC6113B321ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB322	-	XC6113B322ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB323	-	XC6113B323ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AB324	-	XC6113B324ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB325	-	XC6113B325ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB326	-	XC6113B326ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB327	-	XC6113B327ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB328	-	XC6113B328ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB329	-	XC6113B329ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB330	-	XC6113B330ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB331	-	XC6113B331ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB332	-	XC6113B332ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB333	-	XC6113B333ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB334	-	XC6113B334ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB335	-	XC6113B335ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB336	-	XC6113B336ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB337	-	XC6113B337ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB338	-	XC6113B338ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB339	-	XC6113B339ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB340	-	XC6113B340ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB341	-	XC6113B341ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB342	-	XC6113B342ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB343	-	XC6113B343ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB344	-	XC6113B344ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB345	-	XC6113B345ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB346	-	XC6113B346ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB347	-	XC6113B347ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB348	-	XC6113B348ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB349	-	XC6113B349ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB350	-	XC6113B350ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB4	-	XC6501B3517R-G	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AB4	-	XC6501B351GR-G	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AB4	-	XC9260A14CER-G	DC-DC-IC	PWM step-down, 1.4V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AB416	-	XC6113B416ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB417	-	XC6113B417ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB418	-	XC6113B418ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB419	-	XC6113B419ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB420	-	XC6113B420ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB421	-	XC6113B421ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB422	-	XC6113B422ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB423	-	XC6113B423ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB424	-	XC6113B424ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB425	-	XC6113B425ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB426	-	XC6113B426ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB427	-	XC6113B427ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB428	-	XC6113B428ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB429	-	XC6113B429ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB430	-	XC6113B430ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB431	-	XC6113B431ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB432	-	XC6113B432ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB433	-	XC6113B433ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB434	-	XC6113B434ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB435	-	XC6113B435ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB436	-	XC6113B436ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB437	-	XC6113B437ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB438	-	XC6113B438ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB439	-	XC6113B439ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB440	-	XC6113B440ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB441	-	XC6113B441ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB442	-	XC6113B442ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB443	-	XC6113B443ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB444	-	XC6113B444ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB445	-	XC6113B445ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB446	-	XC6113B446ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB447	-	XC6113B447ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB448	-	XC6113B448ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB449	-	XC6113B449ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB450	-	XC6113B450ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB5	-	XC6501B3617R-G	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AB5	-	XC6501B361GR-G	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AB5	-	XC9260A15CER-G	DC-DC-IC	PWM step-down, 1.5V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AB516	-	XC6113B516ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB517	-	XC6113B517ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AB518	-	XC6113B518ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB519	-	XC6113B519ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB520	-	XC6113B520ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB521	-	XC6113B521ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB522	-	XC6113B522ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB523	-	XC6113B523ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB524	-	XC6113B524ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB525	-	XC6113B525ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB526	-	XC6113B526ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB527	-	XC6113B527ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB528	-	XC6113B528ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB529	-	XC6113B529ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB530	-	XC6113B530ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB531	-	XC6113B531ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB532	-	XC6113B532ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB533	-	XC6113B533ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB534	-	XC6113B534ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB535	-	XC6113B535ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB536	-	XC6113B536ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB537	-	XC6113B537ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB538	-	XC6113B538ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB539	-	XC6113B539ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB540	-	XC6113B540ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB541	-	XC6113B541ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB542	-	XC6113B542ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB543	-	XC6113B543ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB544	-	XC6113B544ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB545	-	XC6113B545ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB546	-	XC6113B546ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB547	-	XC6113B547ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB548	-	XC6113B548ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB549	-	XC6113B549ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB550	-	XC6113B550ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB6	-	XC6501B3717R-G	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AB6	-	XC6501B371GR-G	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AB6	-	XC9260A16CER-G	DC-DC-IC	PWM step-down, 1.6V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AB616	-	XC6113B616ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB617	-	XC6113B617ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB618	-	XC6113B618ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB619	-	XC6113B619ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB620	-	XC6113B620ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB621	-	XC6113B621ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB622	-	XC6113B622ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB623	-	XC6113B623ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB624	-	XC6113B624ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB625	-	XC6113B625ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB626	-	XC6113B626ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB627	-	XC6113B627ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB628	-	XC6113B628ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB629	-	XC6113B629ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB630	-	XC6113B630ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB631	-	XC6113B631ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB632	-	XC6113B632ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB633	-	XC6113B633ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB634	-	XC6113B634ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB635	-	XC6113B635ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB636	-	XC6113B636ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB637	-	XC6113B637ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB638	-	XC6113B638ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB639	-	XC6113B639ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB640	-	XC6113B640ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB641	-	XC6113B641ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB642	-	XC6113B642ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB643	-	XC6113B643ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB644	-	XC6113B644ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB645	-	XC6113B645ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB646	-	XC6113B646ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB647	-	XC6113B647ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB648	-	XC6113B648ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB649	-	XC6113B649ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AB650	-	XC6113B650ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xh	VD17	9b	Tor
AB7	-	XC6501B3817R-G	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AB7	-	XC6501B381GR-G	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AB7	-	XC9260A17CER-G	DC-DC-IC	PWM step-down, 1.7V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AB8	-	XC6501B3917R-G	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AB8	-	XC6501B391GR-G	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AB8	-	XC9260A18CER-G	DC-DC-IC	PWM step-down, 1.8V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AB9	-	XC6501B4017R-G	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AB9	-	XC6501B401GR-G	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AB9	-	XC9260A19CER-G	DC-DC-IC	PWM step-down, 1.9V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ABA	-	MAX6411BS35-T	Vdet-IC	3.5V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
ABA	-	TC1302ABAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABA	-	XC6501B4117R-G	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ABA	-	XC6501B411GR-G	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ABA	-	XC9260A1ACER-G	DC-DC-IC	PWM step-down, 1.05V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ABAA	-	TC1301ABAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABAB	-	TC1301ABABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABAC	-	TC1301ABACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABAD	-	TC1301ABADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABAE	-	TC1301ABAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABAF	-	TC1301ABAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABB	-	MAX6411BS36-T	Vdet-IC	3.6V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
ABB	-	TC1302ABBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABB	-	XC6501B4217R-G	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ABB	-	XC6501B421GR-G	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ABB	-	XC9260A1BCER-G	DC-DC-IC	PWM step-down, 1.15V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ABBA	-	TC1301ABBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABBB	-	TC1301ABBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABBC	-	TC1301ABBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABBD	-	TC1301ABBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABBE	-	TC1301ABBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABBF	-	TC1301ABBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABC	-	MAX6411BS37-T	Vdet-IC	3.7V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
ABC	-	TC1302ABCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABC	-	XC6501B4317R-G	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ABC	-	XC6501B431GR-G	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ABC	-	XC9260A1CCER-G	DC-DC-IC	PWM step-down, 1.25V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ABCA	-	TC1301ABCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABCB	-	TC1301ABCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABCC	-	TC1301ABCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABCD	-	TC1301ABCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABCE	-	TC1301ABCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABCF	-	TC1301ABCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABD	-	MAX6411BS38-T	Vdet-IC	3.8V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
ABD	-	TC1302ABDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABD	-	XC6501B4417R-G	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ABD	-	XC6501B441GR-G	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ABD	-	XC9260A1DCER-G	DC-DC-IC	PWM step-down, 1.35VV±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ABDA	-	TC1301ABDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABDB	-	TC1301ABDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABDC	-	TC1301ABDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABDD	-	TC1301ABDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABDE	-	TC1301ABDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABDF	-	TC1301ABDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABE	-	MAX6411BS39-T	Vdet-IC	3.9V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
ABE	-	TC1302ABEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABE	-	XC6501B4517R-G	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ABE	-	XC6501B451GR-G	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ABE	-	XC9260A1ECER-G	DC-DC-IC	PWM step-down, 1.45V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ABEA	-	TC1301ABEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABEB	-	TC1301ABEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABEC	-	TC1301ABECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABED	-	TC1301ABEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABEE	-	TC1301ABEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABEF	-	TC1301ABEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABF	-	MAX6411BS40-T	Vdet-IC	4.0V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
ABF	-	MAX97200AEWC+	Lin-IC	AF PA, 1.6..2V, 2x45mW(16Ω), shutdown	BGA-12	39	-	9m	Max
ABF	-	TC1302ABFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABF	-	XC6501B4617R-G	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ABF	-	XC6501B461GR-G	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABF	-	XC9260A1FCER-G	DC-DC-IC	PWM step-down, 1.55V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ABFA	-	TC1301ABFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABFB	-	TC1301ABFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABFC	-	TC1301ABFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABFD	-	TC1301ABFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABFE	-	TC1301ABFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABFF	-	TC1301ABFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABG	-	MAX6411BS41-T	Vdet-IC	4.1V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
ABG	-	MAX6477BL18AD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset PPO, Set, +CE	BGA-6	40	-	9m	Max
ABG	-	MAX97200BEWC+	Lin-IC	AF PA, 1.6..2V, 2x45mW(16Ω), shutdown	BGA-12	39	-	9m	Max
ABG	-	TC1302ABGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABGA	-	TC1301ABGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABGB	-	TC1301ABGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABGC	-	TC1301ABGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABGD	-	TC1301ABGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABGE	-	TC1301ABGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABGF	-	TC1301ABGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABH	-	MAX6411BS42-T	Vdet-IC	4.2V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
ABH	-	MAX6478BL28BD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset ODO, Set, +CE	BGA-6	40	-	9m	Max
ABH	-	TC1302ABHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABH	-	XC6501B4717R-G	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ABH	-	XC6501B471GR-G	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ABH	-	XC9260A1HCER-G	DC-DC-IC	PWM step-down, 1.65V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ABHA	-	TC1301ABHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABHB	-	TC1301ABHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABHC	-	TC1301ABHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABHD	-	TC1301ABHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABHE	-	TC1301ABHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABHF	-	TC1301ABHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABI	-	MAX6411BS43-T	Vdet-IC	4.3V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
ABI	-	MAX6479BL15BD2	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset PPO, Set, -MR	BGA-6	40	-	9m	Max
ABI	-	TC1302ABIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABIA	-	TC1301ABIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABIB	-	TC1301ABIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABIC	-	TC1301ABICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABID	-	TC1301ABIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABIE	-	TC1301ABIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABIF	-	TC1301ABIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABJ	-	MAX6411BS44-T	Vdet-IC	4.4V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
ABJ	-	MAX6480BL33AD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset ODO, Set, -MR	BGA-6	40	-	9m	Max
ABJ	-	TC1302ABJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABJA	-	TC1301ABJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABJB	-	TC1301ABJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABJC	-	TC1301ABJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABJD	-	TC1301ABJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABJE	-	TC1301ABJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABJF	-	TC1301ABJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABK	-	MAX6411BS45-T	Vdet-IC	4.5V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
ABK	-	MAX6481BL30BD4	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, -MR, +CE	BGA-6	40	-	9m	Max
ABK	-	TC1302ABKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABK	-	XC6501B4817R-G	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ABK	-	XC6501B481GR-G	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ABK	-	XC9260A1KCER-G	DC-DC-IC	PWM step-down, 1.75V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ABKA	-	TC1301ABKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABKB	-	TC1301ABKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABKC	-	TC1301ABKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABKD	-	TC1301ABKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABKE	-	TC1301ABKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABKF	-	TC1301ABKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABL	-	MAX6411BS46-T	Vdet-IC	4.6V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
ABL	-	MAX6482BL18BD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset ODO, -MR, +CE	BGA-6	40	-	9m	Max
ABL	-	TC1302ABLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABL	-	XC6501B4917R-G	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ABL	-	XC6501B491GR-G	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ABL	-	XC9260A1LCER-G	DC-DC-IC	PWM step-down, 1.85V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ABLA	-	TC1301ABLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABLB	-	TC1301ABLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABLC	-	TC1301ABLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABLD	-	TC1301ABLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABLE	-	TC1301ABLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABLF	-	TC1301ABLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABM	-	MAX6483BL25AD1	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset PPO, FB, +CE	BGA-6	40	-	9m	Max
ABM	-	TC1302ABMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABM	-	XC6501B5017R-G	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ABM	-	XC6501B501GR-G	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ABM	-	XC9260A1MCER-G	DC-DC-IC	PWM step-down, 1.95V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ABMA	-	TC1301ABMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABMB	-	TC1301ABMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABMC	-	TC1301ABMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABMD	-	TC1301ABMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABME	-	TC1301ABMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABMF	-	TC1301ABMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABN	-	MAX6484BL33BD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset ODO, FB, +CE	BGA-6	40	-	9m	Max
ABN	-	MAX9712EBC-T	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 500mW(5V/8Ω), shutdown	BGA-10	39	AFP56	9m	Max
ABN	-	TC1302ABNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABNA	-	TC1301ABNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABNB	-	TC1301ABNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABNC	-	TC1301ABNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABND	-	TC1301ABNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABNE	-	TC1301ABNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABNF	-	TC1301ABNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABO	-	TC1302ABOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABOA	-	TC1301ABOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABOB	-	TC1301ABOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABOC	-	TC1301ABOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABOD	-	TC1301ABODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABOE	-	TC1301ABOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABOF	-	TC1301ABOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABP	-	MAX9721AEBC+T	Lin-IC	AF PA, 0.9..1.8V, 2x20mW(1.9V/32Ω), shutdown	BGA-12	39	AFP57	9m	Max
ABP	-	TC1302ABPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABPA	-	TC1301ABPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABPB	-	TC1301ABPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABPC	-	TC1301ABPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABPD	-	TC1301ABPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABPE	-	TC1301ABPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABPF	-	TC1301ABPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABQ	-	MAX9721BEBC+T	Lin-IC	AF PA, 0.9..1.8V, 2x20mW(1.5V/32Ω), shutdown	BGA-12	39	AFP57	9m	Max
ABQ	-	TC1302ABQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABQA	-	TC1301ABQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABQB	-	TC1301ABQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABQC	-	TC1301ABQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABQD	-	TC1301ABQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABQE	-	TC1301ABQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABQF	-	TC1301ABQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABR	-	MAX9721CEBC+T	Lin-IC	AF PA, 0.9..1.8V, 2x20mW(1.5V/32Ω), shutdown	BGA-12	39	AFP57	9m	Max
ABR	-	TC1302ABRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABRA	-	TC1301ABRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABRB	-	TC1301ABRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABRC	-	TC1301ABRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABRD	-	TC1301ABRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABRE	-	TC1301ABREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABRF	-	TC1301ABRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABS	-	TC1302ABSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABSA	-	TC1301ABSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABSB	-	TC1301ABSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABSC	-	TC1301ABSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABSD	-	TC1301ABSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABSE	-	TC1301ABSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABSF	-	TC1301ABSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABT	-	TC1302ABTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABTA	-	TC1301ABTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABTB	-	TC1301ABTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABTC	-	TC1301ABTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABTD	-	TC1301ABTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABTE	-	TC1301ABTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABTF	-	TC1301ABTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABU	-	TC1302ABUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABUA	-	TC1301ABUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABUB	-	TC1301ABUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABUC	-	TC1301ABUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ABUD	-	TC1301ABUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABUE	-	TC1301ABUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABUF	-	TC1301ABUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABV	-	TC1302ABVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABVA	-	TC1301ABVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABVB	-	TC1301ABVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABVC	-	TC1301ABVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABVD	-	TC1301ABVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABVE	-	TC1301ABVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABVF	-	TC1301ABVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABW	-	MAX6477BL15BD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset PPO, Set, +CE	BGA-6	40	-	9m	Max
ABW	-	TC1302ABWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ABWA	-	TC1301ABWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABWB	-	TC1301ABWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABWC	-	TC1301ABWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABWD	-	TC1301ABWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABWE	-	TC1301ABWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABWF	-	TC1301ABWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ABX	-	MAX6477BL25BD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset PPO, Set, +CE	BGA-6	40	-	9m	Max
ABY	-	MAX6477BL28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, Set, +CE	BGA-6	40	-	9m	Max
ABZ	-	MAX6477BL30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, Set, +CE	BGA-6	40	-	9m	Max
aC	-	74AUP1G57GF	CMOS-Log	Configurable multiple-function gate	SOT891	52	Log36	9z	Nxp
aC	-	74AUP1G57GM	CMOS-Log	Configurable multiple-function gate	SOT886	57	Log36	9z	Nxp
AC	-	BU25TA2WNVX	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	SSON004X1216	110vm	VR4	9mc	Rhm
AC	-	BZX884-B6V8	Z-diode	6.8V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
AC	-	RP104K151B	LVR-IC	LDO, 1.5V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AC	-	RP105K081B	LVR-IC	LDO, 0.8V±15mV, 400mA, +CE	DFN1212-6	52zd	VR11	9a	Ric
AC	-	RT9013B-18PQWA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	WDFN-6	49xu	VR4	9a	Rct
AC	-	XC6221A13B7R	LVR-IC	LDO, 1.35V±20mV, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AC	-	XC6223C22B9R-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AC	-	XC6504A2217R-G	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AC	-	XC9244A20C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.0V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AC0	-	XC6501C3117R-G	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AC0	-	XC6501C311GR-G	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AC0	-	XC9260A20CER-G	DC-DC-IC	PWM step-down, 2.0V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AC01	-	RP102K121B	LVR-IC	LDO, LN, 1.2V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC02	-	RP102K131B	LVR-IC	LDO, LN, 1.3V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC03	-	RP102K151B	LVR-IC	LDO, LN, 1.5V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC04	-	RP102K181B	LVR-IC	LDO, LN, 1.8V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC05	-	RP102K251B	LVR-IC	LDO, LN, 2.5V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC06	-	RP102K261B	LVR-IC	LDO, LN, 2.6V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC07	-	RP102K281B	LVR-IC	LDO, LN, 2.8V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC08	-	RP102K281B5	LVR-IC	LDO, LN, 2.85V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC09	-	RP102K291B	LVR-IC	LDO, LN, 2.9V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC1	-	XC6501C3217R-G	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AC1	-	XC6501C321GR-G	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AC1	-	XC9260A21CER-G	DC-DC-IC	PWM step-down, 2.1V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AC10	-	RP102K301B	LVR-IC	LDO, LN, 3.0V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC11	-	RP102K331B	LVR-IC	LDO, LN, 3.3V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC12	-	RP102K181B5	LVR-IC	LDO, LN, 1.85V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC13	-	RP102K271B	LVR-IC	LDO, LN, 2.7V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC14	-	RP102K121B5	LVR-IC	LDO, LN, 1.25V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC15	-	RP102K311B	LVR-IC	LDO, LN, 3.1V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC16	-	RP102K171B5	LVR-IC	LDO, LN, 1.75V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC17	-	RP102K211B	LVR-IC	LDO, LN, 2.1V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC18	-	RP102K141B	LVR-IC	LDO, LN, 1.4V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC19	-	RP102K321B	LVR-IC	LDO, LN, 3.2V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC2	-	XC6501C3317R-G	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AC2	-	XC6501C331GR-G	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AC2	-	XC9260A22CER-G	DC-DC-IC	PWM step-down, 2.2V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AC20	-	RP102K171B	LVR-IC	LDO, LN, 1.7V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC21	-	RP102K201B	LVR-IC	LDO, LN, 2.0V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC216	-	XC6113C216ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC217	-	XC6113C217ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC218	-	XC6113C218ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC219	-	XC6113C219ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC22	-	RP102K291B5	LVR-IC	LDO, LN, 2.95V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC220	-	XC6113C220ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC221	-	XC6113C221ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC222	-	XC6113C222ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AC223	-	XC6113C223ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC224	-	XC6113C224ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC225	-	XC6113C225ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC226	-	XC6113C226ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC227	-	XC6113C227ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC228	-	XC6113C228ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC229	-	XC6113C229ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC23	-	RP102K321B5	LVR-IC	LDO, LN, 3.25V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC230	-	XC6113C230ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC231	-	XC6113C231ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC232	-	XC6113C232ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC233	-	XC6113C233ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC234	-	XC6113C234ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC235	-	XC6113C235ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC236	-	XC6113C236ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC237	-	XC6113C237ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC238	-	XC6113C238ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC239	-	XC6113C239ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC24	-	RP102K161B	LVR-IC	LDO, LN, 1.6V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC240	-	XC6113C240ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC241	-	XC6113C241ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC242	-	XC6113C242ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC243	-	XC6113C243ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC244	-	XC6113C244ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC245	-	XC6113C245ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC246	-	XC6113C246ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC247	-	XC6113C247ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC248	-	XC6113C248ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC249	-	XC6113C249ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC25	-	RP102K191B	LVR-IC	LDO, LN, 1.9V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC250	-	XC6113C250ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC26	-	RP102K221B	LVR-IC	LDO, LN, 2.2V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC27	-	RP102K231B	LVR-IC	LDO, LN, 2.3V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC28	-	RP102K241B	LVR-IC	LDO, LN, 2.4V±1%, 300mA, +CE	PLP1820-6	49wf	VR4	9b	Ric
AC3	-	XC6501C3417R-G	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AC3	-	XC6501C341GR-G	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AC3	-	XC9260A23CER-G	DC-DC-IC	PWM step-down, 2.3V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AC316	-	XC6113C316ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC317	-	XC6113C317ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC318	-	XC6113C318ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC319	-	XC6113C319ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC320	-	XC6113C320ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC321	-	XC6113C321ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC322	-	XC6113C322ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC323	-	XC6113C323ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC324	-	XC6113C324ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC325	-	XC6113C325ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC326	-	XC6113C326ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC327	-	XC6113C327ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC328	-	XC6113C328ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC329	-	XC6113C329ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC330	-	XC6113C330ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC331	-	XC6113C331ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC332	-	XC6113C332ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC333	-	XC6113C333ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC334	-	XC6113C334ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC335	-	XC6113C335ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC336	-	XC6113C336ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC337	-	XC6113C337ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC338	-	XC6113C338ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC339	-	XC6113C339ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC340	-	XC6113C340ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC341	-	XC6113C341ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC342	-	XC6113C342ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC343	-	XC6113C343ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC344	-	XC6113C344ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC345	-	XC6113C345ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC346	-	XC6113C346ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC347	-	XC6113C347ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC348	-	XC6113C348ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AC349	-	XC6113C349ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC350	-	XC6113C350ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC4	-	XC6501C3517R-G	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AC4	-	XC6501C351GR-G	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AC4	-	XC9260A24CER-G	DC-DC-IC	PWM step-down, 2.4V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AC416	-	XC6113C416ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC417	-	XC6113C417ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC418	-	XC6113C418ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC419	-	XC6113C419ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC420	-	XC6113C420ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC421	-	XC6113C421ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC422	-	XC6113C422ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC423	-	XC6113C423ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC424	-	XC6113C424ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC425	-	XC6113C425ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC426	-	XC6113C426ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC427	-	XC6113C427ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC428	-	XC6113C428ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC429	-	XC6113C429ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC430	-	XC6113C430ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC431	-	XC6113C431ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC432	-	XC6113C432ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC433	-	XC6113C433ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC434	-	XC6113C434ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC435	-	XC6113C435ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC436	-	XC6113C436ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC437	-	XC6113C437ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC438	-	XC6113C438ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC439	-	XC6113C439ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC440	-	XC6113C440ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC441	-	XC6113C441ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC442	-	XC6113C442ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC443	-	XC6113C443ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC444	-	XC6113C444ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC445	-	XC6113C445ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC446	-	XC6113C446ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC447	-	XC6113C447ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC448	-	XC6113C448ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC449	-	XC6113C449ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC450	-	XC6113C450ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC5	-	XC6501C3617R-G	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AC5	-	XC6501C361GR-G	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AC5	-	XC9260A25CER-G	DC-DC-IC	PWM step-down, 2.5V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AC516	-	XC6113C516ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC517	-	XC6113C517ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC518	-	XC6113C518ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC519	-	XC6113C519ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC520	-	XC6113C520ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC521	-	XC6113C521ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC522	-	XC6113C522ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC523	-	XC6113C523ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC524	-	XC6113C524ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC525	-	XC6113C525ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC526	-	XC6113C526ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC527	-	XC6113C527ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC528	-	XC6113C528ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC529	-	XC6113C529ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC530	-	XC6113C530ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC531	-	XC6113C531ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC532	-	XC6113C532ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC533	-	XC6113C533ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC534	-	XC6113C534ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC535	-	XC6113C535ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC536	-	XC6113C536ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC537	-	XC6113C537ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC538	-	XC6113C538ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC539	-	XC6113C539ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC540	-	XC6113C540ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC541	-	XC6113C541ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC542	-	XC6113C542ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AC543	-	XC6113C543ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC544	-	XC6113C544ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC545	-	XC6113C545ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC546	-	XC6113C546ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC547	-	XC6113C547ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC548	-	XC6113C548ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC549	-	XC6113C549ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC550	-	XC6113C550ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC6	-	XC6501C3717R-G	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AC6	-	XC6501C371GR-G	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AC6	-	XC9260A26CER-G	DC-DC-IC	PWM step-down, 2.6V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AC616	-	XC6113C616ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC617	-	XC6113C617ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC618	-	XC6113C618ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC619	-	XC6113C619ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC620	-	XC6113C620ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC621	-	XC6113C621ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC622	-	XC6113C622ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC623	-	XC6113C623ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC624	-	XC6113C624ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC625	-	XC6113C625ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC626	-	XC6113C626ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC627	-	XC6113C627ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC628	-	XC6113C628ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC629	-	XC6113C629ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC630	-	XC6113C630ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC631	-	XC6113C631ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC632	-	XC6113C632ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC633	-	XC6113C633ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC634	-	XC6113C634ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC635	-	XC6113C635ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC636	-	XC6113C636ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC637	-	XC6113C637ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC638	-	XC6113C638ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC639	-	XC6113C639ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC640	-	XC6113C640ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC641	-	XC6113C641ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC642	-	XC6113C642ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC643	-	XC6113C643ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC644	-	XC6113C644ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC645	-	XC6113C645ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC646	-	XC6113C646ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC647	-	XC6113C647ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC648	-	XC6113C648ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC649	-	XC6113C649ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC650	-	XC6113C650ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xh	VD17	9b	Tor
AC7	-	XC6501C3817R-G	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AC7	-	XC6501C381GR-G	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AC7	-	XC9260A27CER-G	DC-DC-IC	PWM step-down, 2.7V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AC8	-	XC6501C3917R-G	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AC8	-	XC6501C391GR-G	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AC8	-	XC9260A28CER-G	DC-DC-IC	PWM step-down, 2.8V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AC9	-	XC6501C4017R-G	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AC9	-	XC6501C401GR-G	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AC9	-	XC9260A29CER-G	DC-DC-IC	PWM step-down, 2.9V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ACA	-	MAX6477BL33AD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset PPO, Set, +CE	BGA-6	40	-	9m	Max
ACA	-	TC1302ACAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACA	-	XC6501C4117R-G	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ACA	-	XC6501C411GR-G	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ACA	-	XC9260A2ACER-G	DC-DC-IC	PWM step-down, 2.05V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ACAA	-	TC1301ACAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACAB	-	TC1301ACABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACAC	-	TC1301ACACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACAD	-	TC1301ACADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACAE	-	TC1301ACAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACAF	-	TC1301ACAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACB	-	MAX6478BL15BD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset ODO, Set, +CE	BGA-6	40	-	9m	Max
ACB	-	TC1302ACBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACB	-	XC6501C4217R-G	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ACB	-	XC6501C421GR-G	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ACB	-	XC9260A2BCER-G	DC-DC-IC	PWM step-down, 2.15V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ACBA	-	TC1301ACBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACBB	-	TC1301ACBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACBC	-	TC1301ACBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACBD	-	TC1301ACBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACBE	-	TC1301ACBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACBF	-	TC1301ACBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACC	-	MAX6478BL18AD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset ODO, Set, +CE	BGA-6	40	-	9m	Max
ACC	-	MAX9700BEBC-T	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 1.2W(5V/8Ω), shutdown	BGA-10	39	AFP56	9m	Max
ACC	-	TC1302ACCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACC	-	XC6501C4317R-G	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ACC	-	XC6501C431GR-G	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ACC	-	XC9260A2CCER-G	DC-DC-IC	PWM step-down, 2.25V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ACCA	-	TC1301ACCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACCB	-	TC1301ACCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACCC	-	TC1301ACCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACCD	-	TC1301ACCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACCE	-	TC1301ACCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACCF	-	TC1301ACCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACD	-	MAX4365ETA	Lin-IC	AF PA, BTL, 2.7..5.5V, 1W(5V/8Ω), shutdown	DFN-8	92	-	9m	Max
ACD	-	MAX6478BL25BD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset ODO, Set, +CE	BGA-6	40	-	9m	Max
ACD	-	MAX9700AEBC-T	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 1.2W(5V/8Ω), shutdown	BGA-10	39	AFP56	9m	Max
ACD	-	TC1302ACDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACD	-	XC6501C4417R-G	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ACD	-	XC6501C441GR-G	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ACD	-	XC9260A2DCER-G	DC-DC-IC	PWM step-down, 2.35V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ACDA	-	TC1301ACDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACDB	-	TC1301ACDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACDC	-	TC1301ACDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACDD	-	TC1301ACDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACDE	-	TC1301ACDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACDF	-	TC1301ACDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACE	-	MAX6478BL28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset ODO, Set, +CE	BGA-6	40	-	9m	Max
ACE	-	MAX9700CEBC-T	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 1.2W(5V/8Ω), shutdown	BGA-10	39	AFP56	9m	Max
ACE	-	TC1302ACEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACE	-	XC6501C4517R-G	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ACE	-	XC6501C451GR-G	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ACE	-	XC9260A2ECER-G	DC-DC-IC	PWM step-down, 2.45V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ACEA	-	TC1301ACEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACEB	-	TC1301ACEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACEC	-	TC1301ACECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACED	-	TC1301ACEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACEE	-	TC1301ACEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACEF	-	TC1301ACEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACF	-	MAX6478BL30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset ODO, Set, +CE	BGA-6	40	-	9m	Max
ACF	-	MAX9700DEBC-T	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 1.2W(5V/8Ω), shutdown	BGA-10	39	AFP56	9m	Max
ACF	-	TC1302ACFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACF	-	XC6501C4617R-G	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ACF	-	XC6501C461GR-G	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ACF	-	XC9260A2FCER-G	DC-DC-IC	PWM step-down, 2.55V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ACFA	-	TC1301ACFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACFB	-	TC1301ACFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACFC	-	TC1301ACFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACFD	-	TC1301ACFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACFE	-	TC1301ACFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACFF	-	TC1301ACFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACG	-	MAX6478BL33AD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset ODO, Set, +CE	BGA-6	40	-	9m	Max
ACG	-	MAX9705BEBC+T	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 2.3W(5V/4Ω), shutdown	BGA-10	39	AFP60	9m	Max
ACG	-	TC1302ACGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACGA	-	TC1301ACGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACGB	-	TC1301ACGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACGC	-	TC1301ACGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACGD	-	TC1301ACGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACGE	-	TC1301ACGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACGF	-	TC1301ACGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACH	-	MAX6479BL15AD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset PPO, Set, -MR	BGA-6	40	-	9m	Max
ACH	-	MAX9705AEBC+T	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 2.3W(5V/4Ω), shutdown	BGA-10	39	AFP60	9m	Max
ACH	-	TC1302ACHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACH	-	XC6501C4717R-G	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ACH	-	XC6501C471GR-G	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ACH	-	XC9260A2HCER-G	DC-DC-IC	PWM step-down, 2.65V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ACHA	-	TC1301ACHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACHB	-	TC1301ACHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACHC	-	TC1301ACHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACHD	-	TC1301ACHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACHE	-	TC1301ACHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACHF	-	TC1301ACHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACI	-	MAX6479BL18BD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset PPO, Set, -MR	BGA-6	40	-	9m	Max
ACI	-	MAX9700BETB	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 1.2W(5V/8Ω), shutdown	DFN-10	37	AFP55	9m	Max
ACI	-	MAX9705CEBC+T	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 2.3W(5V/4Ω), shutdown	BGA-10	39	AFP60	9m	Max
ACI	-	TC1302ACIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACIA	-	TC1301ACIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACIB	-	TC1301ACIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACIC	-	TC1301ACICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACID	-	TC1301ACIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACIE	-	TC1301ACIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACIF	-	TC1301ACIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACJ	-	MAX6479BL25AD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset PPO, Set, -MR	BGA-6	40	-	9m	Max
ACJ	-	MAX9705DEBC+T	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 2.3W(5V/4Ω), shutdown	BGA-10	39	AFP60	9m	Max
ACJ	-	TC1302ACJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACJA	-	TC1301ACJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACJB	-	TC1301ACJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACJC	-	TC1301ACJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACJD	-	TC1301ACJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACJE	-	TC1301ACJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACJF	-	TC1301ACJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACK	-	MAX6479BL28BD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, Set, -MR	BGA-6	40	-	9m	Max
ACK	-	MAX9725AEBC-T	Lin-IC	AF PA, 0.9..1.8V, 2x20mW(1.9V/32Ω), shutdown	BGA-12	39	AFP57	9m	Max
ACK	-	TC1302ACKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACK	-	XC6501C4817R-G	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ACK	-	XC6501C481GR-G	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ACK	-	XC9260A2KCER-G	DC-DC-IC	PWM step-down, 2.75V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ACKA	-	TC1301ACKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACKB	-	TC1301ACKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACKC	-	TC1301ACKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACKD	-	TC1301ACKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACKE	-	TC1301ACKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACKF	-	TC1301ACKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACL	-	MAX6479BL30AD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, Set, -MR	BGA-6	40	-	9m	Max
ACL	-	MAX9725BEBC-T	Lin-IC	AF PA, 0.9..1.8V, 2x20mW(1.9V/32Ω), shutdown	BGA-12	39	AFP57	9m	Max
ACL	-	TC1302ACLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACL	-	XC6501C4917R-G	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ACL	-	XC6501C491GR-G	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ACL	-	XC9260A2LCER-G	DC-DC-IC	PWM step-down, 2.85V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ACLA	-	TC1301ACLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACLB	-	TC1301ACLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACLC	-	TC1301ACLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACLD	-	TC1301ACLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACLE	-	TC1301ACLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACLF	-	TC1301ACLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACM	-	MAX6479BL33BD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset PPO, Set, -MR	BGA-6	40	-	9m	Max
ACM	-	MAX9700AETB	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 1.2W(5V/8Ω), shutdown	DFN-10	37	AFP55	9m	Max
ACM	-	MAX9725CEBC-T	Lin-IC	AF PA, 0.9..1.8V, 2x20mW(1.9V/32Ω), shutdown	BGA-12	39	AFP57	9m	Max
ACM	-	TC1302ACMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACM	-	XC6501C5017R-G	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ACM	-	XC6501C501GR-G	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ACM	-	XC9260A2MCER-G	DC-DC-IC	PWM step-down, 2.95V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ACMA	-	TC1301ACMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACMB	-	TC1301ACMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACMC	-	TC1301ACMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACMD	-	TC1301ACMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACME	-	TC1301ACMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACMF	-	TC1301ACMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACN	-	MAX6480BL15BD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset ODO, Set, -MR	BGA-6	40	-	9m	Max
ACN	-	MAX9700CETB	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 1.2W(5V/8Ω), shutdown	DFN-10	37	AFP55	9m	Max
ACN	-	MAX9725DEBC-T	Lin-IC	AF PA, 0.9..1.8V, 2x20mW(1.9V/32Ω), shutdown	BGA-12	39	AFP57	9m	Max
ACN	-	TC1302ACNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACNA	-	TC1301ACNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACNB	-	TC1301ACNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACNC	-	TC1301ACNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ACND	-	TC1301ACNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACNE	-	TC1301ACNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACNF	-	TC1301ACNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACO	-	MAX6480BL18AD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset ODO, Set, -MR	BGA-6	40	-	9m	Max
ACO	-	MAX9700DETB	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 1.2W(5V/8Ω), shutdown	DFN-10	37	AFP55	9m	Max
ACO	-	TC1302ACOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACOA	-	TC1301ACOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACOB	-	TC1301ACOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACOC	-	TC1301ACOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACOD	-	TC1301ACODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACOE	-	TC1301ACOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACOF	-	TC1301ACOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACP	-	MAX6480BL25BD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset ODO, Set, -MR	BGA-6	40	-	9m	Max
ACP	-	MAX9830ETA+	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2W(5V/4Ω), shutdown	DFN-8	92	-	9m	Max
ACP	-	TC1302ACPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACPA	-	TC1301ACPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACPB	-	TC1301ACPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACPC	-	TC1301ACPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACPD	-	TC1301ACPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACPE	-	TC1301ACPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACPF	-	TC1301ACPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACQ	-	MAX6480BL28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset ODO, Set, -MR	BGA-6	40	-	9m	Max
ACQ	-	TC1302ACQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACQA	-	TC1301ACQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACQB	-	TC1301ACQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACQC	-	TC1301ACQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACQD	-	TC1301ACQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACQE	-	TC1301ACQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACQF	-	TC1301ACQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACR	-	MAX6480BL30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset ODO, Set, -MR	BGA-6	40	-	9m	Max
ACR	-	TC1302ACRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACRA	-	TC1301ACRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACRB	-	TC1301ACRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACRC	-	TC1301ACRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACRD	-	TC1301ACRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACRE	-	TC1301ACREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACRF	-	TC1301ACRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACS	-	MAX6481BL15BD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset PPO, -MR, +CE	BGA-6	40	-	9m	Max
ACS	-	TC1302ACSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACSA	-	TC1301ACSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACSB	-	TC1301ACSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACSC	-	TC1301ACSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACSD	-	TC1301ACSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACSE	-	TC1301ACSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACSF	-	TC1301ACSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACT	-	MAX6469TA28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, Set, +CE	DFN-8	75	-	9m	Max
ACT	-	MAX6481BL18AD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset PPO, -MR, +CE	BGA-6	40	-	9m	Max
ACT	-	TC1302ACTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACTA	-	TC1301ACTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACTB	-	TC1301ACTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACTC	-	TC1301ACTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACTD	-	TC1301ACTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACTE	-	TC1301ACTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACTF	-	TC1301ACTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACU	-	MAX6470TA33AD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset ODO, Set, +CE	DFN-8	75	-	9m	Max
ACU	-	MAX6481BL25BD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset PPO, -MR, +CE	BGA-6	40	-	9m	Max
ACU	-	TC1302ACUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACUA	-	TC1301ACUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACUB	-	TC1301ACUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACUC	-	TC1301ACUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACUD	-	TC1301ACUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACUE	-	TC1301ACUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACUF	-	TC1301ACUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACV	-	MAX6471TA30BD4	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, Set, -MR	DFN-8	75	-	9m	Max
ACV	-	MAX6481BL28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, -MR, +CE	BGA-6	40	-	9m	Max
ACV	-	TC1302ACVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACVA	-	TC1301ACVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACVB	-	TC1301ACVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACVC	-	TC1301ACVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACVD	-	TC1301ACVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ACVE	-	TC1301ACVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACVF	-	TC1301ACVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACW	-	MAX6472TA18BD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset ODO, Set, -MR	DFN-8	75	-	9m	Max
ACW	-	MAX6481BL30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, -MR, +CE	BGA-6	40	-	9m	Max
ACW	-	TC1302ACWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ACWA	-	TC1301ACWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACWB	-	TC1301ACWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACWC	-	TC1301ACWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACWD	-	TC1301ACWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACWE	-	TC1301ACWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACWF	-	TC1301ACWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ACX	-	MAX6473TA25AD1	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset PPO, -MR, +CE	DFN-8	75	-	9m	Max
ACX	-	MAX6481BL33AD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset PPO, -MR, +CE	BGA-6	40	-	9m	Max
ACX	-	MAX9705BETB+T	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.3W(5V/4Ω), shutdown	TDFN-10	37	AFP55	9m	Max
ACY	-	MAX6474TA15BD2	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset ODO, -MR, +CE	DFN-8	75	-	9m	Max
ACY	-	MAX6482BL15BD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset ODO, -MR, +CE	BGA-6	40	-	9m	Max
ACY	-	MAX9705AETB+T	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.3W(5V/4Ω), shutdown	TDFN-10	37	AFP55	9m	Max
ACZ	-	MAX6475TA33AD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset PPO, FB, +CE	DFN-8	75	-	9m	Max
ACZ	-	MAX6482BL18AD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset ODO, -MR, +CE	BGA-6	40	-	9m	Max
ACZ	-	MAX9705CETB+T	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.3W(5V/4Ω), shutdown	TDFN-10	37	AFP55	9m	Max
aD	-	74AUP2GU04GM	CMOS-Log	Dual inverters	SOT886	57	Log24	9z	Nxp
AD	-	BU26TA2WNVX	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	SSON004X1216	110vm	VR4	9mc	Rhm
AD	-	BZX884-B7V5	Z-diode	7.5V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
AD	-	RP104K181B	LVR-IC	LDO, 1.8V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AD	-	RP105K091B	LVR-IC	LDO, 0.9V±15mV, 400mA, +CE	DFN1212-6	52zd	VR11	9a	Ric
AD	-	RT9013B-25PQWA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	WDFN-6	49xu	VR4	9a	Rct
AD	-	XC6221A14B7R	LVR-IC	LDO, 1.45V±20mV, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AD	-	XC6223C23B9R-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AD	-	XC6504A2317R-G	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AD	-	XC9244A21C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.1V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AD-	-	RT9013-15PQV	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	WDFN-8	49	VR4	9a	Rct
AD0	-	XC6501D3117R-G	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AD0	-	XC6501D311GR-G	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AD0	-	XC9260A30CER-G	DC-DC-IC	PWM step-down, 3.0V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AD01	-	RP102K121D	LVR-IC	LDO, LN, 1.2V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD02	-	RP102K131D	LVR-IC	LDO, LN, 1.3V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD03	-	RP102K151D	LVR-IC	LDO, LN, 1.5V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD04	-	RP102K181D	LVR-IC	LDO, LN, 1.8V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD05	-	RP102K251D	LVR-IC	LDO, LN, 2.5V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD06	-	RP102K261D	LVR-IC	LDO, LN, 2.6V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD07	-	RP102K281D	LVR-IC	LDO, LN, 2.8V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD08	-	RP102K281D5	LVR-IC	LDO, LN, 2.85V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD09	-	RP102K291D	LVR-IC	LDO, LN, 2.9V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD1	-	XC6501D3217R-G	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AD1	-	XC6501D321GR-G	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AD1	-	XC9260A31CER-G	DC-DC-IC	PWM step-down, 3.1V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AD10	-	RP102K301D	LVR-IC	LDO, LN, 3.0V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD11	-	RP102K331D	LVR-IC	LDO, LN, 3.3V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD12	-	RP102K181D5	LVR-IC	LDO, LN, 1.85V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD13	-	RP102K271D	LVR-IC	LDO, LN, 2.7V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD14	-	RP102K121D5	LVR-IC	LDO, LN, 1.25V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD15	-	RP102K311D	LVR-IC	LDO, LN, 3.1V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD16	-	RP102K171D5	LVR-IC	LDO, LN, 1.75V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD17	-	RP102K211D	LVR-IC	LDO, LN, 2.1V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD18	-	RP102K141D	LVR-IC	LDO, LN, 1.4V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD19	-	RP102K321D	LVR-IC	LDO, LN, 3.2V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD2	-	XC6501D3317R-G	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AD2	-	XC6501D331GR-G	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AD2	-	XC9260A32CER-G	DC-DC-IC	PWM step-down, 3.2V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AD20	-	RP102K171D	LVR-IC	LDO, LN, 1.7V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD21	-	RP102K201D	LVR-IC	LDO, LN, 2.0V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD22	-	RP102K291D5	LVR-IC	LDO, LN, 2.95V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD23	-	RP102K321D5	LVR-IC	LDO, LN, 3.25V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD24	-	RP102K161D	LVR-IC	LDO, LN, 1.6V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD25	-	RP102K191D	LVR-IC	LDO, LN, 1.9V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD26	-	RP102K221D	LVR-IC	LDO, LN, 2.2V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD27	-	RP102K231D	LVR-IC	LDO, LN, 2.3V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD28	-	RP102K241D	LVR-IC	LDO, LN, 2.4V±1%, 300mA, +CE, CL	PLP1820-6	49wf	VR4	9b	Ric
AD3	-	XC6501D3417R-G	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AD3	-	XC6501D341GR-G	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AD3	-	XC9260A33CER-G	DC-DC-IC	PWM step-down, 3.3V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AD316	-	XC6113D316ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD317	-	XC6113D317ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD318	-	XC6113D318ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD319	-	XC6113D319ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD320	-	XC6113D320ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD321	-	XC6113D321ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD322	-	XC6113D322ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD323	-	XC6113D323ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD324	-	XC6113D324ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD325	-	XC6113D325ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD326	-	XC6113D326ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD327	-	XC6113D327ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD328	-	XC6113D328ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD329	-	XC6113D329ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD330	-	XC6113D330ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD331	-	XC6113D331ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD332	-	XC6113D332ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD333	-	XC6113D333ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD334	-	XC6113D334ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD335	-	XC6113D335ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD336	-	XC6113D336ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD337	-	XC6113D337ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD338	-	XC6113D338ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD339	-	XC6113D339ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD340	-	XC6113D340ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD341	-	XC6113D341ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD342	-	XC6113D342ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD343	-	XC6113D343ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD344	-	XC6113D344ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD345	-	XC6113D345ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD346	-	XC6113D346ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD347	-	XC6113D347ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD348	-	XC6113D348ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD349	-	XC6113D349ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD350	-	XC6113D350ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD4	-	XC6501D3517R-G	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AD4	-	XC6501D351GR-G	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AD4	-	XC9260A34CER-G	DC-DC-IC	PWM step-down, 3.4V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AD416	-	XC6113D416ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD417	-	XC6113D417ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD418	-	XC6113D418ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD419	-	XC6113D419ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD420	-	XC6113D420ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD421	-	XC6113D421ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD422	-	XC6113D422ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD423	-	XC6113D423ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD424	-	XC6113D424ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD425	-	XC6113D425ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD426	-	XC6113D426ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD427	-	XC6113D427ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD428	-	XC6113D428ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD429	-	XC6113D429ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD430	-	XC6113D430ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD431	-	XC6113D431ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD432	-	XC6113D432ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD433	-	XC6113D433ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD434	-	XC6113D434ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD435	-	XC6113D435ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD436	-	XC6113D436ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD437	-	XC6113D437ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD438	-	XC6113D438ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD439	-	XC6113D439ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD440	-	XC6113D440ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD441	-	XC6113D441ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD442	-	XC6113D442ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD443	-	XC6113D443ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD444	-	XC6113D444ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD445	-	XC6113D445ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD446	-	XC6113D446ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AD447	-	XC6113D447ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD448	-	XC6113D448ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD449	-	XC6113D449ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD450	-	XC6113D450ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD5	-	XC6501D3617R-G	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AD5	-	XC6501D361GR-G	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AD5	-	XC9260A35CER-G	DC-DC-IC	PWM step-down, 3.5V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AD516	-	XC6113D516ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD517	-	XC6113D517ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD518	-	XC6113D518ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD519	-	XC6113D519ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD520	-	XC6113D520ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD521	-	XC6113D521ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD522	-	XC6113D522ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD523	-	XC6113D523ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD524	-	XC6113D524ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD525	-	XC6113D525ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD526	-	XC6113D526ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD527	-	XC6113D527ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD528	-	XC6113D528ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD529	-	XC6113D529ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD530	-	XC6113D530ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD531	-	XC6113D531ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD532	-	XC6113D532ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD533	-	XC6113D533ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD534	-	XC6113D534ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD535	-	XC6113D535ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD536	-	XC6113D536ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD537	-	XC6113D537ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD538	-	XC6113D538ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD539	-	XC6113D539ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD540	-	XC6113D540ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD541	-	XC6113D541ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD542	-	XC6113D542ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD543	-	XC6113D543ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD544	-	XC6113D544ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD545	-	XC6113D545ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD546	-	XC6113D546ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD547	-	XC6113D547ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD548	-	XC6113D548ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD549	-	XC6113D549ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD550	-	XC6113D550ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD6	-	XC6501D3717R-G	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AD6	-	XC6501D371GR-G	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AD6	-	XC9260A36CER-G	DC-DC-IC	PWM step-down, 3.6V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AD616	-	XC6113D616ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD617	-	XC6113D617ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD618	-	XC6113D618ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD619	-	XC6113D619ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD620	-	XC6113D620ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD621	-	XC6113D621ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD622	-	XC6113D622ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD623	-	XC6113D623ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD624	-	XC6113D624ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD625	-	XC6113D625ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD626	-	XC6113D626ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD627	-	XC6113D627ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD628	-	XC6113D628ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD629	-	XC6113D629ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD630	-	XC6113D630ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD631	-	XC6113D631ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD632	-	XC6113D632ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD633	-	XC6113D633ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD634	-	XC6113D634ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD635	-	XC6113D635ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD636	-	XC6113D636ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD637	-	XC6113D637ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD638	-	XC6113D638ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD639	-	XC6113D639ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD640	-	XC6113D640ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AD641	-	XC6113D641ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD642	-	XC6113D642ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD643	-	XC6113D643ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD644	-	XC6113D644ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD645	-	XC6113D645ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD646	-	XC6113D646ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD647	-	XC6113D647ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD648	-	XC6113D648ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD649	-	XC6113D649ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD650	-	XC6113D650ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xh	VD17	9b	Tor
AD7	-	XC6501D3817R-G	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AD7	-	XC6501D381GR-G	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AD8	-	XC6501D3917R-G	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AD8	-	XC6501D391GR-G	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AD9	-	XC6501D4017R-G	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AD9	-	XC6501D401GR-G	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ADA	-	MAX6476TA15AD1	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset ODO, FB, +CE	DFN-8	75	-	9m	Max
ADA	-	MAX6482BL25BD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset ODO, -MR, +CE	BGA-6	40	-	9m	Max
ADA	-	MAX9705DETB+T	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.3W(5V/4Ω), shutdown	TDFN-10	37	AFP55	9m	Max
ADA	-	TC1302ADAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADA	-	XC6501D4117R-G	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ADA	-	XC6501D411GR-G	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ADA	-	XC9260A3ACER-G	DC-DC-IC	PWM step-down, 3.05V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ADAA	-	TC1301ADAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADAB	-	TC1301ADABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADAC	-	TC1301ADACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADAD	-	TC1301ADADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADAE	-	TC1301ADAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADAF	-	TC1301ADAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADB	-	MAX6482BL28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset ODO, -MR, +CE	BGA-6	40	-	9m	Max
ADB	-	TC1302ADBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADB	-	XC6501D4217R-G	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ADB	-	XC6501D421GR-G	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ADB	-	XC9260A3BCER-G	DC-DC-IC	PWM step-down, 3.15V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ADBA	-	TC1301ADBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADBB	-	TC1301ADBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADBC	-	TC1301ADBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADBD	-	TC1301ADBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADBE	-	TC1301ADBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADBF	-	TC1301ADBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADC	-	MAX6482BL30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset ODO, -MR, +CE	BGA-6	40	-	9m	Max
ADC	-	TC1302ADCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADC	-	XC6501D4317R-G	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ADC	-	XC6501D431GR-G	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ADC	-	XC9260A3CCER-G	DC-DC-IC	PWM step-down, 3.25V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ADCA	-	TC1301ADCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADCB	-	TC1301ADCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADCC	-	TC1301ADCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADCD	-	TC1301ADCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADCE	-	TC1301ADCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADCF	-	TC1301ADCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADD	-	MAX6482BL33AD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset ODO, -MR, +CE	BGA-6	40	-	9m	Max
ADD	-	TC1302ADDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADD	-	XC6501D4417R-G	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ADD	-	XC6501D441GR-G	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ADD	-	XC9260A3DCER-G	DC-DC-IC	PWM step-down, 3.35V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ADDA	-	TC1301ADDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADDB	-	TC1301ADDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADDC	-	TC1301ADDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADDD	-	TC1301ADDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADDE	-	TC1301ADDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADDF	-	TC1301ADDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADE	-	MAX6483BL15BD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset PPO, FB, +CE	BGA-6	40	-	9m	Max
ADE	-	TC1302ADEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADE	-	XC6501D4517R-G	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ADE	-	XC6501D451GR-G	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ADE	-	XC9260A3ECER-G	DC-DC-IC	PWM step-down, 3.45V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ADEA	-	TC1301ADEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADEB	-	TC1301ADEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADEC	-	TC1301ADECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ADED	-	TC1301ADEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADEE	-	TC1301ADEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADEF	-	TC1301ADEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADF	-	MAX6483BL18AD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset PPO, FB, +CE	BGA-6	40	-	9m	Max
ADF	-	TC1302ADFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADF	-	XC6501D4617R-G	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ADF	-	XC6501D461GR-G	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ADF	-	XC9260A3FCER-G	DC-DC-IC	PWM step-down, 3.55V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ADFA	-	TC1301ADFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADFB	-	TC1301ADFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADFC	-	TC1301ADFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADFD	-	TC1301ADFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADFE	-	TC1301ADFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADFF	-	TC1301ADFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADG	-	MAX6483BL25BD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, FB, +CE	BGA-6	40	-	9m	Max
ADG	-	TC1302ADGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADGA	-	TC1301ADGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADGB	-	TC1301ADGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADGC	-	TC1301ADGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADGD	-	TC1301ADGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADGE	-	TC1301ADGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADGF	-	TC1301ADGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADH	-	MAX6483BL28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, FB, +CE	BGA-6	40	-	9m	Max
ADH	-	TC1302ADHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADH	-	XC6501D4717R-G	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ADH	-	XC6501D471GR-G	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ADHA	-	TC1301ADHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADHB	-	TC1301ADHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADHC	-	TC1301ADHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADHD	-	TC1301ADHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADHE	-	TC1301ADHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADHF	-	TC1301ADHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADI	-	MAX6483BL30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, FB, +CE	BGA-6	40	-	9m	Max
ADI	-	TC1302ADIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADIA	-	TC1301ADIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADIB	-	TC1301ADIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADIC	-	TC1301ADICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADID	-	TC1301ADIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADIE	-	TC1301ADIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADIF	-	TC1301ADIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADJ	-	MAX6483BL33AD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset PPO, FB, +CE	BGA-6	40	-	9m	Max
ADJ	-	TC1302ADJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADJA	-	TC1301ADJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADJB	-	TC1301ADJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADJC	-	TC1301ADJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADJD	-	TC1301ADJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADJE	-	TC1301ADJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADJF	-	TC1301ADJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADK	-	MAX6484BL15BD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset ODO, FB, +CE	BGA-6	40	-	9m	Max
ADK	-	TC1302ADKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADK	-	XC6501D4817R-G	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ADK	-	XC6501D481GR-G	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ADKA	-	TC1301ADKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADKB	-	TC1301ADKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADKC	-	TC1301ADKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADKD	-	TC1301ADKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADKE	-	TC1301ADKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADKF	-	TC1301ADKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADL	-	MAX6484BL18AD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset ODO, FB, +CE	BGA-6	40	-	9m	Max
ADL	-	TC1302ADLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADL	-	XC6501D4917R-G	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ADL	-	XC6501D491GR-G	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ADLA	-	TC1301ADLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADLB	-	TC1301ADLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADLC	-	TC1301ADLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADLD	-	TC1301ADLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADLE	-	TC1301ADLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADLF	-	TC1301ADLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADM	-	MAX6484BL25BD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset ODO, FB, +CE	BGA-6	40	-	9m	Max
ADM	-	TC1302ADMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ADM	-	XC6501D5017R-G	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ADM	-	XC6501D501GR-G	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ADMA	-	TC1301ADMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADMB	-	TC1301ADMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADMC	-	TC1301ADMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADMD	-	TC1301ADMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADME	-	TC1301ADMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADMF	-	TC1301ADMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADN	-	MAX6484BL28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset ODO, FB, +CE	BGA-6	40	-	9m	Max
ADN	-	TC1302ADNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADNA	-	TC1301ADNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADNB	-	TC1301ADNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADNC	-	TC1301ADNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADND	-	TC1301ADNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADNE	-	TC1301ADNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADNF	-	TC1301ADNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADO	-	MAX6469TA15BD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset PPO, Set, +CE	DFN-8	75	-	9m	Max
ADO	-	MAX6484BL30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset ODO, FB, +CE	BGA-6	40	-	9m	Max
ADO	-	TC1302ADOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADOA	-	TC1301ADOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADOB	-	TC1301ADOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADOC	-	TC1301ADOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADOD	-	TC1301ADODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADOE	-	TC1301ADOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADOF	-	TC1301ADOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADP	-	MAX6469TA18AD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset PPO, Set, +CE	DFN-8	75	-	9m	Max
ADP	-	MAX6484BL33AD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset ODO, FB, +CE	BGA-6	40	-	9m	Max
ADP	-	TC1302ADPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADPA	-	TC1301ADPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADPB	-	TC1301ADPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADPC	-	TC1301ADPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADPD	-	TC1301ADPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADPE	-	TC1301ADPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADPF	-	TC1301ADPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADQ	-	MAX6469TA25BD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset PPO, Set, +CE	DFN-8	75	-	9m	Max
ADQ	-	MAX6477BL285AD3	LVR/Vdet-IC	LDO, 2.85V±1.3%, 300mA, -Reset PPO, Set, +CE	BGA-6	40	-	9m	Max
ADQ	-	TC1302ADQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADQA	-	TC1301ADQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADQB	-	TC1301ADQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADQC	-	TC1301ADQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADQD	-	TC1301ADQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADQE	-	TC1301ADQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADQF	-	TC1301ADQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADR	-	MAX6469TA30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, Set, +CE	DFN-8	75	-	9m	Max
ADR	-	MAX6477BL285BD3	LVR/Vdet-IC	LDO, 2.85V±1.3%, 300mA, -Reset PPO, Set, +CE	BGA-6	40	-	9m	Max
ADR	-	TC1302ADRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADRA	-	TC1301ADRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADRB	-	TC1301ADRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADRC	-	TC1301ADRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADRD	-	TC1301ADRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADRE	-	TC1301ADREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADRF	-	TC1301ADRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADS	-	MAX6469TA33AD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset PPO, Set, +CE	DFN-8	75	-	9m	Max
ADS	-	MAX6478BL285AD3	LVR/Vdet-IC	LDO, 2.85V±1.3%, 300mA, -Reset ODO, Set, +CE	BGA-6	40	-	9m	Max
ADS	-	TC1302ADSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADSA	-	TC1301ADSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADSB	-	TC1301ADSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADSC	-	TC1301ADSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADSD	-	TC1301ADSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADSE	-	TC1301ADSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADSF	-	TC1301ADSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADT	-	MAX6470TA15BD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset ODO, Set, +CE	DFN-8	75	-	9m	Max
ADT	-	MAX6478BL285BD3	LVR/Vdet-IC	LDO, 2.85V±1.3%, 300mA, -Reset ODO, Set, +CE	BGA-6	40	-	9m	Max
ADT	-	TC1302ADTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADTA	-	TC1301ADTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADTB	-	TC1301ADTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADTC	-	TC1301ADTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADTD	-	TC1301ADTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADTE	-	TC1301ADTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADTF	-	TC1301ADTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ADU	-	MAX6470TA18AD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset ODO, Set, +CE	DFN-8	75	-	9m	Max
ADU	-	TC1302ADUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADUA	-	TC1301ADUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADUB	-	TC1301ADUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADUC	-	TC1301ADUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADUD	-	TC1301ADUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADUE	-	TC1301ADUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADUF	-	TC1301ADUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADV	-	MAX6470TA25BD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset ODO, Set, +CE	DFN-8	75	-	9m	Max
ADV	-	MAX9890AEBL-T	Lin-IC	Audio click-pop supress, (36dB), 2.7..5.5V, THD<0.03%(32Ω)	BGA-9	39bf*	-	9a	Max
ADV	-	TC1302ADVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADVA	-	TC1301ADVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADVB	-	TC1301ADVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADVC	-	TC1301ADVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADVD	-	TC1301ADVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADVE	-	TC1301ADVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADVF	-	TC1301ADVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADW	-	MAX6406BS22-T	Vdet-IC	2.2V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
ADW	-	MAX6470TA28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset ODO, Set, +CE	DFN-8	75	-	9m	Max
ADW	-	MAX9890BEBL-T	Lin-IC	Audio click-pop supress, (36dB), 2.7..5.5V, THD<0.03%(32Ω)	BGA-9	39bf*	-	9a	Max
ADW	-	TC1302ADWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ADWA	-	TC1301ADWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADWB	-	TC1301ADWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADWC	-	TC1301ADWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADWD	-	TC1301ADWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADWE	-	TC1301ADWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADWF	-	TC1301ADWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ADX	-	MAX6406BS23-T	Vdet-IC	2.3V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
ADX	-	MAX9718AEBL-T	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	BGA-9	39	AFP53	9m	Max
ADY	-	MAX6406BS24-T	Vdet-IC	2.4V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
ADY	-	MAX6470TA30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset ODO, Set, +CE	DFN-8	75	-	9m	Max
ADY	-	MAX9718BEBL-T	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	BGA-9	39	AFP54	9m	Max
ADZ	-	MAX6406BS25-T	Vdet-IC	2.5V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
ADZ	-	MAX6471TA15AD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset PPO, Set, -MR	DFN-8	75	-	9m	Max
ADZ	-	MAX9718CEBL-T	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	BGA-9	39	AFP54	9m	Max
AE	-	BU27TA2WNVX	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	SSON004X1216	110vm	VR4	9mc	Rhm
AE	-	BZX884-B8V2	Z-diode	8.2V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
AE	-	RP104K181B5	LVR-IC	LDO, 1.85V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AE	-	RP105K101B	LVR-IC	LDO, 1.0V±15mV, 400mA, +CE	DFN1212-6	52zd	VR11	9a	Ric
AE	-	RT9013B-33PQWA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	WDFN-6	49xu	VR4	9a	Rct
AE	-	XC6221A15B7R	LVR-IC	LDO, 1.55V±20mV, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AE	-	XC6223C24B9R-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AE	-	XC6504A2417R-G	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AE	-	XC9244A22C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.2V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AE-	-	RT9013-25PQV	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	WDFN-8	49	VR4	9a	Rct
AE416	-	XC6113E416ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE417	-	XC6113E417ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE418	-	XC6113E418ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE419	-	XC6113E419ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE420	-	XC6113E420ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE421	-	XC6113E421ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE422	-	XC6113E422ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE423	-	XC6113E423ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE424	-	XC6113E424ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE425	-	XC6113E425ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE426	-	XC6113E426ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE427	-	XC6113E427ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE428	-	XC6113E428ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE429	-	XC6113E429ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE430	-	XC6113E430ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE431	-	XC6113E431ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE432	-	XC6113E432ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE433	-	XC6113E433ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE434	-	XC6113E434ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE435	-	XC6113E435ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE436	-	XC6113E436ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE437	-	XC6113E437ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE438	-	XC6113E438ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE439	-	XC6113E439ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE440	-	XC6113E440ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AE441	-	XC6113E441ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE442	-	XC6113E442ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE443	-	XC6113E443ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE444	-	XC6113E444ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE445	-	XC6113E445ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE446	-	XC6113E446ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE447	-	XC6113E447ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE448	-	XC6113E448ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE449	-	XC6113E449ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE450	-	XC6113E450ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE516	-	XC6113E516ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE517	-	XC6113E517ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE518	-	XC6113E518ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE519	-	XC6113E519ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE520	-	XC6113E520ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE521	-	XC6113E521ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE522	-	XC6113E522ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE523	-	XC6113E523ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE524	-	XC6113E524ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE525	-	XC6113E525ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE526	-	XC6113E526ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE527	-	XC6113E527ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE528	-	XC6113E528ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE529	-	XC6113E529ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE530	-	XC6113E530ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE531	-	XC6113E531ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE532	-	XC6113E532ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE533	-	XC6113E533ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE534	-	XC6113E534ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE535	-	XC6113E535ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE536	-	XC6113E536ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE537	-	XC6113E537ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE538	-	XC6113E538ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE539	-	XC6113E539ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE540	-	XC6113E540ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE541	-	XC6113E541ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE542	-	XC6113E542ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE543	-	XC6113E543ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE544	-	XC6113E544ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE545	-	XC6113E545ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE546	-	XC6113E546ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE547	-	XC6113E547ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE548	-	XC6113E548ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE549	-	XC6113E549ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE550	-	XC6113E550ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE616	-	XC6113E616ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE617	-	XC6113E617ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE618	-	XC6113E618ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE619	-	XC6113E619ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE620	-	XC6113E620ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE621	-	XC6113E621ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE622	-	XC6113E622ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE623	-	XC6113E623ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE624	-	XC6113E624ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE625	-	XC6113E625ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE626	-	XC6113E626ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE627	-	XC6113E627ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE628	-	XC6113E628ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE629	-	XC6113E629ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE630	-	XC6113E630ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE631	-	XC6113E631ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE632	-	XC6113E632ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE633	-	XC6113E633ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE634	-	XC6113E634ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE635	-	XC6113E635ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE636	-	XC6113E636ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE637	-	XC6113E637ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE638	-	XC6113E638ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE639	-	XC6113E639ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE640	-	XC6113E640ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AE641	-	XC6113E641ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE642	-	XC6113E642ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE643	-	XC6113E643ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE644	-	XC6113E644ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE645	-	XC6113E645ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE646	-	XC6113E646ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE647	-	XC6113E647ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE648	-	XC6113E648ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE649	-	XC6113E649ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE650	-	XC6113E650ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xh	VD17	9b	Tor
AE8	-	XC9260A08DER-G	DC-DC-IC	PWM step-down, 0.8V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AE9	-	XC9260A09DER-G	DC-DC-IC	PWM step-down, 0.9V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AEA	-	MAX6406BS26-T	Vdet-IC	2.6V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AEA	-	MAX6471TA18BD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset PPO, Set, -MR	DFN-8	75	-	9m	Max
AEA	-	MAX9718DEBL-T	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), select shutdown	BGA-9	39	AFP54	9m	Max
AEA	-	TC1302AEAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEAA	-	TC1301AEAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEAB	-	TC1301AEABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEAC	-	TC1301AEACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEAD	-	TC1301AEADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEAE	-	TC1301AEAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEAF	-	TC1301AEAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEB	-	MAX6406BS27-T	Vdet-IC	2.7V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AEB	-	MAX6471TA25AD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset PPO, Set, -MR	DFN-8	75	-	9m	Max
AEB	-	MAX9716EBL-T	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), shutdown	BGA-9	39	AFP44	9m	Max
AEB	-	TC1302AEBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEB	-	XC6501A12A7R-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AEB	-	XC6501A12AGR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AEBA	-	TC1301AEBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEBB	-	TC1301AEBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEBC	-	TC1301AEBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEBD	-	TC1301AEBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEBE	-	TC1301AEBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEBF	-	TC1301AEBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEC	-	MAX6406BS28-T	Vdet-IC	2.8V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AEC	-	MAX6471TA28BD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, Set, -MR	DFN-8	75	-	9m	Max
AEC	-	MAX9717AEBL-T	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), shutdown	BGA-9	39	-	9m	Max
AEC	-	TC1302AECVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEC	-	XC6501A13A7R-G	LVR-IC	LDO, 1.35V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AEC	-	XC6501A13AGR-G	LVR-IC	LDO, 1.35V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AECA	-	TC1301AECAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AECB	-	TC1301AECBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AECC	-	TC1301AECCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AECD	-	TC1301AECDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AECE	-	TC1301AECEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AECF	-	TC1301AECFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AED	-	MAX6406BS29-T	Vdet-IC	2.9V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AED	-	MAX6471TA30AD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, Set, -MR	DFN-8	75	-	9m	Max
AED	-	MAX9717BEBL-T	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), shutdown	BGA-9	39	-	9m	Max
AED	-	TC1302AEDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AED	-	XC6501A14A7R-G	LVR-IC	LDO, 1.45V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AED	-	XC6501A14AGR-G	LVR-IC	LDO, 1.45V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AEDA	-	TC1301AEDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEDB	-	TC1301AEDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEDC	-	TC1301AEDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEDD	-	TC1301AEDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEDE	-	TC1301AEDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEDF	-	TC1301AEDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEE	-	MAX6406BS30-T	Vdet-IC	3.0V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AEE	-	MAX6471TA33BD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset PPO, Set, -MR	DFN-8	75	-	9m	Max
AEE	-	MAX9717CEBL-T	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), shutdown	BGA-9	39	-	9m	Max
AEE	-	TC1302AEEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEE	-	XC6501A15A7R-G	LVR-IC	LDO, 1.55V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AEE	-	XC6501A15AGR-G	LVR-IC	LDO, 1.55V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AEEA	-	TC1301AEEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEEB	-	TC1301AEEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEEC	-	TC1301AEECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEED	-	TC1301AEEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEEE	-	TC1301AEEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEEF	-	TC1301AEEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AEF	-	MAX6406BS31-T	Vdet-IC	3.1V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AEF	-	MAX6472TA15AD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset ODO, Set, -MR	DFN-8	75	-	9m	Max
AEF	-	MAX9717DEBL-T	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), shutdown	BGA-9	39	-	9m	Max
AEF	-	TC1302AEFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEF	-	XC6501A16A7R-G	LVR-IC	LDO, 1.65V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AEF	-	XC6501A16AGR-G	LVR-IC	LDO, 1.65V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AEFA	-	TC1301AEFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEFB	-	TC1301AEFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEFC	-	TC1301AEFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEFD	-	TC1301AEFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEFE	-	TC1301AEFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEFF	-	TC1301AEFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEG	-	MAX6407BS22-T	Vdet-IC	2.2V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AEG	-	MAX6472TA25AD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset ODO, Set, -MR	DFN-8	75	-	9m	Max
AEG	-	TC1302AEGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEGA	-	TC1301AEGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEGB	-	TC1301AEGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEGC	-	TC1301AEGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEGD	-	TC1301AEGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEGE	-	TC1301AEGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEGF	-	TC1301AEGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEH	-	MAX6407BS23-T	Vdet-IC	2.3V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AEH	-	MAX6472TA28BD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset ODO, Set, -MR	DFN-8	75	-	9m	Max
AEH	-	TC1302AEHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEH	-	XC6501A17A7R-G	LVR-IC	LDO, 1.75V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AEH	-	XC6501A17AGR-G	LVR-IC	LDO, 1.75V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AEHA	-	TC1301AEHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEHB	-	TC1301AEHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEHC	-	TC1301AEHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEHD	-	TC1301AEHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEHE	-	TC1301AEHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEHF	-	TC1301AEHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEI	-	MAX6407BS24-T	Vdet-IC	2.4V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AEI	-	MAX6472TA30AD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset ODO, Set, -MR	DFN-8	75	-	9m	Max
AEI	-	MAX6478BL33BD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset ODO, Set, +CE	BGA-6	40	-	9m	Max
AEI	-	TC1302AEIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEIA	-	TC1301AEIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEIB	-	TC1301AEIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEIC	-	TC1301AEICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEID	-	TC1301AEIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEIE	-	TC1301AEIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEIF	-	TC1301AEIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEJ	-	MAX6407BS25-T	Vdet-IC	2.5V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AEJ	-	MAX6472TA33BD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset ODO, Set, -MR	DFN-8	75	-	9m	Max
AEJ	-	MAX6479BL30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, Set, -MR	BGA-6	40	-	9m	Max
AEJ	-	TC1302AEJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEJA	-	TC1301AEJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEJB	-	TC1301AEJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEJC	-	TC1301AEJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEJD	-	TC1301AEJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEJE	-	TC1301AEJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEJF	-	TC1301AEJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEK	-	MAX6407BS26-T	Vdet-IC	2.6V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AEK	-	MAX6473TA15AD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset PPO, -MR, +CE	DFN-8	75	-	9m	Max
AEK	-	MAX6480BL25AD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset ODO, Set, -MR	BGA-6	40	-	9m	Max
AEK	-	TC1302AEKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEK	-	XC6501A18A7R-G	LVR-IC	LDO, 1.85V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AEK	-	XC6501A18AGR-G	LVR-IC	LDO, 1.85V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AEKA	-	TC1301AEKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEKB	-	TC1301AEKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEKC	-	TC1301AEKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEKD	-	TC1301AEKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEKE	-	TC1301AEKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEKF	-	TC1301AEKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEL	-	MAX6407BS27-T	Vdet-IC	2.7V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AEL	-	MAX6473TA18BD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset PPO, -MR, +CE	DFN-8	75	-	9m	Max
AEL	-	MAX6482BL33BD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset ODO, -MR, +CE	BGA-6	40	-	9m	Max
AEL	-	TC1302AELVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEL	-	XC6501A19A7R-G	LVR-IC	LDO, 1.95V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AEL	-	XC6501A19AGR-G	LVR-IC	LDO, 1.95V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AEL	-	XC9260A0LDER-G	DC-DC-IC	PWM step-down, 0.85V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AELA	-	TC1301AELAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AELB	-	TC1301AELBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AELC	-	TC1301AELCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AELD	-	TC1301AELDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AELE	-	TC1301AELEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AELF	-	TC1301AELFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEM	-	MAX6407BS28-T	Vdet-IC	2.8V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AEM	-	MAX6473TA25AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, -MR, +CE	DFN-8	75	-	9m	Max
AEM	-	MAX6484BL18BD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset ODO, FB, +CE	BGA-6	40	-	9m	Max
AEM	-	TC1302AEMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEM	-	XC6501A20A7R-G	LVR-IC	LDO, 2.05V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AEM	-	XC6501A20AGR-G	LVR-IC	LDO, 2.05V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AEM	-	XC9260A0MDER-G	DC-DC-IC	PWM step-down, 0.95V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AEMA	-	TC1301AEMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEMB	-	TC1301AEMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEMC	-	TC1301AEMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEMD	-	TC1301AEMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEME	-	TC1301AEMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEMF	-	TC1301AEMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEN	-	MAX6407BS29-T	Vdet-IC	2.9V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AEN	-	MAX6473TA28BD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, -MR, +CE	DFN-8	75	-	9m	Max
AEN	-	TC1302AENVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEN	-	XC6501A21A7R-G	LVR-IC	LDO, 2.15V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AEN	-	XC6501A21AGR-G	LVR-IC	LDO, 2.15V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AENA	-	TC1301AENAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AENB	-	TC1301AENBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AENC	-	TC1301AENCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEND	-	TC1301AENDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AENE	-	TC1301AENEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AENF	-	TC1301AENFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEO	-	MAX6407BS30-T	Vdet-IC	3.0V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AEO	-	MAX6473TA30AD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, -MR, +CE	DFN-8	75	-	9m	Max
AEO	-	TC1302AEOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEOA	-	TC1301AEOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEOB	-	TC1301AEOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEOC	-	TC1301AEOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEOD	-	TC1301AEODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEOE	-	TC1301AEOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEOF	-	TC1301AEOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEP	-	MAX6407BS31-T	Vdet-IC	3.1V±1.5%, -MR, +Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AEP	-	MAX6473TA33BD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset PPO, -MR, +CE	DFN-8	75	-	9m	Max
AEP	-	TC1302AEPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEP	-	XC6501A22A7R-G	LVR-IC	LDO, 2.25V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AEP	-	XC6501A22AGR-G	LVR-IC	LDO, 2.25V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AEPA	-	TC1301AEPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEPB	-	TC1301AEPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEPC	-	TC1301AEPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEPD	-	TC1301AEPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEPE	-	TC1301AEPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEPF	-	TC1301AEPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEQ	-	MAX6408BS22-T	Vdet-IC	2.2V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
AEQ	-	MAX6474TA15AD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset ODO, -MR, +CE	DFN-8	75	-	9m	Max
AEQ	-	TC1302AEQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEQA	-	TC1301AEQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEQB	-	TC1301AEQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEQC	-	TC1301AEQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEQD	-	TC1301AEQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEQE	-	TC1301AEQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEQF	-	TC1301AEQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AER	-	MAX6408BS23-T	Vdet-IC	2.3V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
AER	-	MAX6474TA18BD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset ODO, -MR, +CE	DFN-8	75	-	9m	Max
AER	-	MAX6477BL22BD3	LVR/Vdet-IC	LDO, 2.2V±1.3%, 300mA, -Reset PPO, Set, +CE	BGA-6	40	-	9m	Max
AER	-	MAX98302ETD+	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 2x2.4W(5V/4Ω), shutdown	TDFN-14	37	-	9m	Max
AER	-	TC1302AERVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AER	-	XC6501A23A7R-G	LVR-IC	LDO, 2.35V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AER	-	XC6501A23AGR-G	LVR-IC	LDO, 2.35V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AERA	-	TC1301AERAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AERB	-	TC1301AERBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AERC	-	TC1301AERCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AERD	-	TC1301AERDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AERE	-	TC1301AEREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AERF	-	TC1301AERFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AES	-	MAX6408BS24-T	Vdet-IC	2.4V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
AES	-	MAX6474TA25AD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset ODO, -MR, +CE	DFN-8	75	-	9m	Max
AES	-	TC1302AESVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AES	-	XC6501A24A7R-G	LVR-IC	LDO, 2.45V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AES	-	XC6501A24AGR-G	LVR-IC	LDO, 2.45V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AESA	-	TC1301AESAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AESB	-	TC1301AESBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AESC	-	TC1301AESCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AESD	-	TC1301AESDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AESE	-	TC1301AESEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AESF	-	TC1301AESFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AET	-	MAX6408BS25-T	Vdet-IC	2.5V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
AET	-	MAX6474TA28BD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset ODO, -MR, +CE	DFN-8	75	-	9m	Max
AET	-	TC1302AETVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AET	-	XC6501A25A7R-G	LVR-IC	LDO, 2.55V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AET	-	XC6501A25AGR-G	LVR-IC	LDO, 2.55V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AETA	-	TC1301AETAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AETB	-	TC1301AETBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AETC	-	TC1301AETCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AETD	-	TC1301AETDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AETE	-	TC1301AETEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AETF	-	TC1301AETFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEU	-	MAX6408BS26-T	Vdet-IC	2.6V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
AEU	-	MAX6474TA30AD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset ODO, -MR, +CE	DFN-8	75	-	9m	Max
AEU	-	TC1302AEUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEU	-	XC6501A26A7R-G	LVR-IC	LDO, 2.65V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AEU	-	XC6501A26AGR-G	LVR-IC	LDO, 2.65V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AEUA	-	TC1301AEUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEUB	-	TC1301AEUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEUC	-	TC1301AEUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEUD	-	TC1301AEUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEUE	-	TC1301AEUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEUF	-	TC1301AEUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEV	-	MAX6408BS27-T	Vdet-IC	2.7V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
AEV	-	MAX6474TA33BD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset ODO, -MR, +CE	DFN-8	75	-	9m	Max
AEV	-	TC1302AEVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEV	-	XC6501A27A7R-G	LVR-IC	LDO, 2.75V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AEV	-	XC6501A27AGR-G	LVR-IC	LDO, 2.75V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AEVA	-	TC1301AEVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEVB	-	TC1301AEVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEVC	-	TC1301AEVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEVD	-	TC1301AEVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEVE	-	TC1301AEVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEVF	-	TC1301AEVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEW	-	MAX6408BS28-T	Vdet-IC	2.8V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
AEW	-	MAX6475TA15BD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset PPO, FB, +CE	DFN-8	75	-	9m	Max
AEW	-	TC1302AEWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AEWA	-	TC1301AEWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEWB	-	TC1301AEWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEWC	-	TC1301AEWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEWD	-	TC1301AEWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEWE	-	TC1301AEWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEWF	-	TC1301AEWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AEX	-	MAX6408BS29-T	Vdet-IC	2.9V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
AEX	-	MAX6475TA18AD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset PPO, FB, +CE	DFN-8	75	-	9m	Max
AEX	-	XC6501A28A7R-G	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AEX	-	XC6501A28AGR-G	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AEY	-	MAX6408BS30-T	Vdet-IC	3.0V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
AEY	-	MAX6475TA25BD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset PPO, FB, +CE	DFN-8	75	-	9m	Max
AEY	-	XC6501A29A7R-G	LVR-IC	LDO, 2.95V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AEY	-	XC6501A29AGR-G	LVR-IC	LDO, 2.95V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AEZ	-	MAX6408BS31-T	Vdet-IC	3.1V±1.5%, -MR, -Reset ODO	UCSP-4	63bd*	VD4	9a	Max
AEZ	-	MAX6475TA28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, FB, +CE	DFN-8	75	-	9m	Max
AEZ	-	XC6501A30A7R-G	LVR-IC	LDO, 3.05V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AEZ	-	XC6501A30AGR-G	LVR-IC	LDO, 3.05V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AF	-	BU28TA2WNVX	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	SSON004X1216	110vm	VR4	9mc	Rhm
AF	-	BZX884-B9V1	Z-diode	9.1V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AF	-	RP104K191B	LVR-IC	LDO, 1.9V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AF	-	RP105K121B	LVR-IC	LDO, 1.2V±15mV, 400mA, +CE	DFN1212-6	52zd	VR11	9a	Ric
AF	-	XC6221A16B7R	LVR-IC	LDO, 1.65V±20mV, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AF	-	XC6223C25B9R-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AF	-	XC6504A2517R-G	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AF	-	XC9244A23C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.3V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AF0	-	XC9260A10DER-G	DC-DC-IC	PWM step-down, 1.0V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AF01	-	RP500K111A	DC-DC-IC	PWM/VFM st-dwn, 1.1V±24mV, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF02	-	RP500K121A	DC-DC-IC	PWM/VFM st-dwn, 1.2V±24mV, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF03	-	RP500K121A5	DC-DC-IC	PWM/VFM st-dwn, 1.2V±24mV, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF04	-	RP500K131A	DC-DC-IC	PWM/VFM st-dwn, 1.3V±24mV, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF05	-	RP500K151A	DC-DC-IC	PWM/VFM st-dwn, 1.5V±24mV, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF06	-	RP500K181A	DC-DC-IC	PWM/VFM st-dwn, 1.8V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF07	-	RP500K251A	DC-DC-IC	PWM/VFM st-dwn, 2.5V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF08	-	RP500K331A	DC-DC-IC	PWM/VFM st-dwn, 3.3V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF09	-	RP500K112A	DC-DC-IC	PWM step-down, 1.1V±24mV, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF1	-	XC9260A11DER-G	DC-DC-IC	PWM step-down, 1.1V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AF10	-	RP500K122A	DC-DC-IC	PWM step-down, 1.2V±24mV, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF11	-	RP500K122A5	DC-DC-IC	PWM step-down, 1.25V±24mV, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF12	-	RP500K132A	DC-DC-IC	PWM step-down, 1.3V±24mV, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF13	-	RP500K152A	DC-DC-IC	PWM step-down, 1.5V±24mV, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF14	-	RP500K182A	DC-DC-IC	PWM step-down, 1.8V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF15	-	RP500K252A	DC-DC-IC	PWM step-down, 2.5V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF16	-	RP500K332A	DC-DC-IC	PWM step-down, 3.3V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF17	-	RP500K161A	DC-DC-IC	PWM/VFM st-dwn, 1.6V±24mV, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF18	-	RP500K281A	DC-DC-IC	PWM/VFM st-dwn, 2.8V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF19	-	RP500K114A	DC-DC-IC	PWM step-down, 1.1V±24mV, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF2	-	XC9260A12DER-G	DC-DC-IC	PWM step-down, 1.2V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AF20	-	RP500K124A	DC-DC-IC	PWM step-down, 1.2V±24mV, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF21	-	RP500K154A	DC-DC-IC	PWM step-down, 1.5V±24mV, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF22	-	RP500K184A	DC-DC-IC	PWM step-down, 1.8V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF23	-	RP500K254A	DC-DC-IC	PWM step-down, 2.5V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF24	-	RP500K284A	DC-DC-IC	PWM step-down, 2.8V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF25	-	RP500K334A	DC-DC-IC	PWM step-down, 3.3V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF26	-	RP500K124A5	DC-DC-IC	PWM step-down, 1.25V±24mV, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF27	-	RP500K134A	DC-DC-IC	PWM step-down, 1.3V±24mV, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF28	-	RP500K162A	DC-DC-IC	PWM step-down, 1.6V±24mV, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF29	-	RP500K164A	DC-DC-IC	PWM step-down, 1.6V±24mV, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF3	-	XC9260A13DER-G	DC-DC-IC	PWM step-down, 1.3V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AF30	-	RP500K282A	DC-DC-IC	PWM step-down, 2.8V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF31	-	RP500K301A	DC-DC-IC	PWM/VFM st-dwn, 3.0V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF32	-	RP500K302A	DC-DC-IC	PWM step-down, 3.0V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF33	-	RP500K304A	DC-DC-IC	PWM step-down, 3.0V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF34	-	RP500K221A	DC-DC-IC	PWM/VFM st-dwn, 2.2V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF35	-	RP500K311A	DC-DC-IC	PWM/VFM st-dwn, 3.1V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF36	-	RP500K141A	DC-DC-IC	PWM/VFM st-dwn, 1.4V±24mV, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF37	-	RP500K201A	DC-DC-IC	PWM/VFM st-dwn, 2.0V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF38	-	RP500K231A	DC-DC-IC	PWM/VFM st-dwn, 2.3V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF39	-	RP500K142A	DC-DC-IC	PWM step-down, 1.4V±24mV, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF4	-	XC9260A14DER-G	DC-DC-IC	PWM step-down, 1.4V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AF40	-	RP500K144A	DC-DC-IC	PWM step-down, 1.4V±24mV, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF41	-	RP500K171A	DC-DC-IC	PWM/VFM st-dwn, 1.7V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF42	-	RP500K172A	DC-DC-IC	PWM step-down, 1.7V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF43	-	RP500K174A	DC-DC-IC	PWM step-down, 1.7V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF44	-	RP500K191A	DC-DC-IC	PWM/VFM st-dwn, 1.9V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF45	-	RP500K192A	DC-DC-IC	PWM step-down, 1.9V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF46	-	RP500K194A	DC-DC-IC	PWM step-down, 1.9V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF47	-	RP500K202A	DC-DC-IC	PWM step-down, 2.0V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF48	-	RP500K204A	DC-DC-IC	PWM step-down, 2.0V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF49	-	RP500K211A	DC-DC-IC	PWM/VFM st-dwn, 2.1V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF5	-	XC9260A15DER-G	DC-DC-IC	PWM step-down, 1.5V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AF50	-	RP500K212A	DC-DC-IC	PWM step-down, 2.1V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF51	-	RP500K214A	DC-DC-IC	PWM step-down, 2.1V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF516	-	XC6113F516ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF517	-	XC6113F517ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF518	-	XC6113F518ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF519	-	XC6113F519ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF52	-	RP500K222A	DC-DC-IC	PWM step-down, 2.2V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF520	-	XC6113F520ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF521	-	XC6113F521ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AF522	-	XC6113F522ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF523	-	XC6113F523ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF524	-	XC6113F524ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF525	-	XC6113F525ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF526	-	XC6113F526ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF527	-	XC6113F527ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF528	-	XC6113F528ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF529	-	XC6113F529ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF53	-	RP500K224A	DC-DC-IC	PWM step-down, 2.2V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF530	-	XC6113F530ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF531	-	XC6113F531ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF532	-	XC6113F532ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF533	-	XC6113F533ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF534	-	XC6113F534ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF535	-	XC6113F535ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF536	-	XC6113F536ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF537	-	XC6113F537ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF538	-	XC6113F538ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF539	-	XC6113F539ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF54	-	RP500K232A	DC-DC-IC	PWM step-down, 2.3V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF540	-	XC6113F540ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF541	-	XC6113F541ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF542	-	XC6113F542ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF543	-	XC6113F543ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF544	-	XC6113F544ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF545	-	XC6113F545ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF546	-	XC6113F546ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF547	-	XC6113F547ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF548	-	XC6113F548ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF549	-	XC6113F549ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF55	-	RP500K234A	DC-DC-IC	PWM step-down, 2.3V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF550	-	XC6113F550ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF56	-	RP500K241A	DC-DC-IC	PWM/VFM st-dwn, 2.4V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF57	-	RP500K242A	DC-DC-IC	PWM step-down, 2.4V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF58	-	RP500K244A	DC-DC-IC	PWM step-down, 2.4V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF59	-	RP500K261A	DC-DC-IC	PWM/VFM st-dwn, 2.6V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF6	-	XC9260A16DER-G	DC-DC-IC	PWM step-down, 1.6V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AF60	-	RP500K262A	DC-DC-IC	PWM step-down, 2.6V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF61	-	RP500K264A	DC-DC-IC	PWM step-down, 2.6V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF616	-	XC6113F616ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF617	-	XC6113F617ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF618	-	XC6113F618ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF619	-	XC6113F619ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF62	-	RP500K271A	DC-DC-IC	PWM/VFM st-dwn, 2.7V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF620	-	XC6113F620ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF621	-	XC6113F621ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF622	-	XC6113F622ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF623	-	XC6113F623ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF624	-	XC6113F624ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF625	-	XC6113F625ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF626	-	XC6113F626ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF627	-	XC6113F627ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF628	-	XC6113F628ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF629	-	XC6113F629ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF63	-	RP500K272A	DC-DC-IC	PWM step-down, 2.7V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF630	-	XC6113F630ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF631	-	XC6113F631ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF632	-	XC6113F632ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF633	-	XC6113F633ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF634	-	XC6113F634ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF635	-	XC6113F635ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF636	-	XC6113F636ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF637	-	XC6113F637ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF638	-	XC6113F638ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF639	-	XC6113F639ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF64	-	RP500K274A	DC-DC-IC	PWM step-down, 2.7V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF640	-	XC6113F640ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF641	-	XC6113F641ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF642	-	XC6113F642ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF643	-	XC6113F643ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AF644	-	XC6113F644ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF645	-	XC6113F645ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF646	-	XC6113F646ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF647	-	XC6113F647ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF648	-	XC6113F648ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF649	-	XC6113F649ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF65	-	RP500K291A	DC-DC-IC	PWM/VFM st-dwn, 2.9V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF650	-	XC6113F650ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xh	VD17	9b	Tor
AF66	-	RP500K292A	DC-DC-IC	PWM step-down, 2.9V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF67	-	RP500K294A	DC-DC-IC	PWM step-down, 2.9V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF68	-	RP500K312A	DC-DC-IC	PWM step-down, 3.1V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF69	-	RP500K314A	DC-DC-IC	PWM step-down, 3.1V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF7	-	XC9260A17DER-G	DC-DC-IC	PWM step-down, 1.7V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AF70	-	RP500K321A	DC-DC-IC	PWM/VFM st-dwn, 3.2V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF71	-	RP500K322A	DC-DC-IC	PWM step-down, 3.2V±1.5%, 600mA, +CE	DFN1820-6	74ee	DC20	9b	Ric
AF72	-	RP500K324A	DC-DC-IC	PWM step-down, 3.2V±1.5%, 600mA, +CE, CL	DFN1820-6	74ee	DC20	9b	Ric
AF8	-	XC9260A18DER-G	DC-DC-IC	PWM step-down, 1.8V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AF9	-	XC9260A19DER-G	DC-DC-IC	PWM step-down, 1.9V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AFA	-	MAX6409BS33-T	Vdet-IC	3.3V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AFA	-	MAX6475TA30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, FB, +CE	DFN-8	75	-	9m	Max
AFA	-	TC1302AFAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFA	-	XC9260A1ADER-G	DC-DC-IC	PWM step-down, 1.05V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AFAA	-	TC1301AFAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFAB	-	TC1301AFABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFAC	-	TC1301AFACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFAD	-	TC1301AFADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFAE	-	TC1301AFAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFAF	-	TC1301AFAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFB	-	MAX6409BS34-T	Vdet-IC	3.4V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AFB	-	MAX6476TA15BD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset ODO, FB, +CE	DFN-8	75	-	9m	Max
AFB	-	TC1302AFBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFB	-	XC6501B12A7R-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFB	-	XC6501B12AGR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFB	-	XC9260A1BDER-G	DC-DC-IC	PWM step-down, 1.15V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AFBA	-	TC1301AFBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFBB	-	TC1301AFBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFBC	-	TC1301AFBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFBD	-	TC1301AFBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFBE	-	TC1301AFBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFBF	-	TC1301AFBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFC	-	MAX6409BS35-T	Vdet-IC	3.5V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AFC	-	MAX6476TA18AD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset ODO, FB, +CE	DFN-8	75	-	9m	Max
AFC	-	TC1302AFCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFC	-	XC6501B13A7R-G	LVR-IC	LDO, 1.35V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFC	-	XC6501B13AGR-G	LVR-IC	LDO, 1.35V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFC	-	XC9260A1CDER-G	DC-DC-IC	PWM step-down, 1.25V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AFCA	-	TC1301AFCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFCB	-	TC1301AFCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFCC	-	TC1301AFCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFCD	-	TC1301AFCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFCE	-	TC1301AFCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFCF	-	TC1301AFCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFD	-	MAX6409BS36-T	Vdet-IC	3.6V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AFD	-	MAX6476TA25BD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset ODO, FB, +CE	DFN-8	75	-	9m	Max
AFD	-	TC1302AFDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFD	-	XC6501B14A7R-G	LVR-IC	LDO, 1.45V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFD	-	XC6501B14AGR-G	LVR-IC	LDO, 1.45V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFD	-	XC9260A1DDER-G	DC-DC-IC	PWM step-down, 1.35VV±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AFDA	-	TC1301AFDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFDB	-	TC1301AFDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFDC	-	TC1301AFDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFDD	-	TC1301AFDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFDE	-	TC1301AFDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFDF	-	TC1301AFDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFE	-	MAX6409BS37-T	Vdet-IC	3.7V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AFE	-	MAX6476TA28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset ODO, FB, +CE	DFN-8	75	-	9m	Max
AFE	-	TC1302AFEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFE	-	XC6501B15A7R-G	LVR-IC	LDO, 1.55V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFE	-	XC6501B15AGR-G	LVR-IC	LDO, 1.55V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFE	-	XC9260A1EDER-G	DC-DC-IC	PWM step-down, 1.45V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AFEA	-	TC1301AFEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFEB	-	TC1301AFEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFEC	-	TC1301AFECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFED	-	TC1301AFEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFEE	-	TC1301AFEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFEF	-	TC1301AFEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFF	-	MAX6409BS38-T	Vdet-IC	3.8V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AFF	-	MAX6476TA30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset ODO, FB, +CE	DFN-8	75	-	9m	Max
AFF	-	MAX8678BETE+	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.1W(5V/8Ω), shutdown	QFN-16	38	-	9m	Max
AFF	-	TC1302AFFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFF	-	XC6501B16A7R-G	LVR-IC	LDO, 1.65V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFF	-	XC6501B16AGR-G	LVR-IC	LDO, 1.65V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFF	-	XC9260A1FDER-G	DC-DC-IC	PWM step-down, 1.55V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AFFA	-	TC1301AFFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFFB	-	TC1301AFFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFFC	-	TC1301AFFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFFD	-	TC1301AFFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFFE	-	TC1301AFFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFFF	-	TC1301AFFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFG	-	MAX6409BS39-T	Vdet-IC	3.9V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AFG	-	MAX6476TA33AD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset ODO, FB, +CE	DFN-8	75	-	9m	Max
AFG	-	TC1302AFGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFGA	-	TC1301AFGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFGB	-	TC1301AFGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFGC	-	TC1301AFGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFGD	-	TC1301AFGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFGE	-	TC1301AFGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFGF	-	TC1301AFGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFH	-	MAX4365-TA	Lin-IC	AF PA, BTL, 2.7..5.5V, 1W(5V/8Ω), shutdown	DFN-8	92	-	9m	Max
AFH	-	MAX6409BS40-T	Vdet-IC	4.0V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AFH	-	MAX6479BL28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, Set, -MR	BGA-6	40	-	9m	Max
AFH	-	TC1302AFHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFH	-	XC6501B17A7R-G	LVR-IC	LDO, 1.75V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFH	-	XC6501B17AGR-G	LVR-IC	LDO, 1.75V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFH	-	XC9260A1HDER-G	DC-DC-IC	PWM step-down, 1.65V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AFHA	-	TC1301AFHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFHB	-	TC1301AFHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFHC	-	TC1301AFHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFHD	-	TC1301AFHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFHE	-	TC1301AFHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFHF	-	TC1301AFHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFI	-	MAX6409BS41-T	Vdet-IC	4.1V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AFI	-	TC1302AFIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFIA	-	TC1301AFIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFIB	-	TC1301AFIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFIC	-	TC1301AFICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFID	-	TC1301AFIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFIE	-	TC1301AFIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFIF	-	TC1301AFIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFJ	-	MAX6409BS42-T	Vdet-IC	4.2V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AFJ	-	TC1302AFJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFJA	-	TC1301AFJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFJB	-	TC1301AFJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFJC	-	TC1301AFJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFJD	-	TC1301AFJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFJE	-	TC1301AFJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFJF	-	TC1301AFJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFK	-	MAX6409BS43-T	Vdet-IC	4.3V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AFK	-	TC1302AFKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFK	-	XC6501B18A7R-G	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFK	-	XC6501B18AGR-G	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFK	-	XC9260A1KDER-G	DC-DC-IC	PWM step-down, 1.75V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AFKA	-	TC1301AFKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFKB	-	TC1301AFKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFKC	-	TC1301AFKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFKD	-	TC1301AFKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFKE	-	TC1301AFKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFKF	-	TC1301AFKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFL	-	MAX6409BS44-T	Vdet-IC	4.4V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AFL	-	TC1302AFLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AFL	-	XC6501B19A7R-G	LVR-IC	LDO, 1.95V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFL	-	XC6501B19AGR-G	LVR-IC	LDO, 1.95V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFL	-	XC9260A1LDER-G	DC-DC-IC	PWM step-down, 1.85V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AFLA	-	TC1301AFLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFLB	-	TC1301AFLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFLC	-	TC1301AFLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFLD	-	TC1301AFLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFLE	-	TC1301AFLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFLF	-	TC1301AFLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFM	-	MAX6409BS45-T	Vdet-IC	4.5V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AFM	-	TC1302AFMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFM	-	XC6501B20A7R-G	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFM	-	XC6501B20AGR-G	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFM	-	XC9260A1MDER-G	DC-DC-IC	PWM step-down, 1.95V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AFMA	-	TC1301AFMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFMB	-	TC1301AFMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFMC	-	TC1301AFMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFMD	-	TC1301AFMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFME	-	TC1301AFMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFMF	-	TC1301AFMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFN	-	MAX6409BS46-T	Vdet-IC	4.6V±1.5%, -MR, -Reset PPO	UCSP-4	63bd*	VD5	9a	Max
AFN	-	TC1302AFNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFN	-	XC6501B21A7R-G	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFN	-	XC6501B21AGR-G	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFNA	-	TC1301AFNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFNB	-	TC1301AFNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFNC	-	TC1301AFNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFND	-	TC1301AFNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFNE	-	TC1301AFNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFNF	-	TC1301AFNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFO	-	TC1302AFOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFOA	-	TC1301AFOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFOB	-	TC1301AFOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFOC	-	TC1301AFOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFOD	-	TC1301AFODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFOE	-	TC1301AFOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFOF	-	TC1301AFOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFP	-	TC1302AFPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFP	-	XC6501B22A7R-G	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFP	-	XC6501B22AGR-G	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFPA	-	TC1301AFPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFPB	-	TC1301AFPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFPC	-	TC1301AFPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFPD	-	TC1301AFPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFPE	-	TC1301AFPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFPF	-	TC1301AFPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFQ	-	TC1302AFQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFQA	-	TC1301AFQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFQB	-	TC1301AFQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFQC	-	TC1301AFQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFQD	-	TC1301AFQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFQE	-	TC1301AFQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFQF	-	TC1301AFQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFR	-	TC1302AFRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFR	-	XC6501B23A7R-G	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFR	-	XC6501B23AGR-G	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFRA	-	TC1301AFRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFRB	-	TC1301AFRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFRC	-	TC1301AFRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFRD	-	TC1301AFRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFRE	-	TC1301AFREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFRF	-	TC1301AFRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFS	-	TC1302AFSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFS	-	XC6501B24A7R-G	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFS	-	XC6501B24AGR-G	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFSA	-	TC1301AFSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFSB	-	TC1301AFSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFSC	-	TC1301AFSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFSD	-	TC1301AFSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFSE	-	TC1301AFSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AFSF	-	TC1301AFSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFT	-	TC1302AFTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFT	-	XC6501B25A7R-G	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFT	-	XC6501B25AGR-G	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFTA	-	TC1301AFTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFTB	-	TC1301AFTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFTC	-	TC1301AFTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFTD	-	TC1301AFTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFTE	-	TC1301AFTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFTF	-	TC1301AFTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFU	-	TC1302AFUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFU	-	XC6501B26A7R-G	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFU	-	XC6501B26AGR-G	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFUA	-	TC1301AFUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFUB	-	TC1301AFUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFUC	-	TC1301AFUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFUD	-	TC1301AFUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFUE	-	TC1301AFUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFUF	-	TC1301AFUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFV	-	TC1302AFVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFV	-	XC6501B27A7R-G	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFV	-	XC6501B27AGR-G	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFVA	-	TC1301AFVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFVB	-	TC1301AFVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFVC	-	TC1301AFVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFVD	-	TC1301AFVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFVE	-	TC1301AFVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFVF	-	TC1301AFVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFW	-	TC1302AFWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AFWA	-	TC1301AFWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFWB	-	TC1301AFWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFWC	-	TC1301AFWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFWD	-	TC1301AFWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFWE	-	TC1301AFWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFWF	-	TC1301AFWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AFX	-	XC6501B28A7R-G	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFX	-	XC6501B28AGR-G	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFY	-	XC6501B29A7R-G	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFY	-	XC6501B29AGR-G	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AFZ	-	XC6501B30A7R-G	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AFZ	-	XC6501B30AGR-G	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
aG	-	74AUP1G332GF	CMOS-Log	3-input OR gate	SOT891	52	Log32	9z	Nxp
aG	-	74AUP1G332GM	CMOS-Log	3-input OR gate	SOT886	57	Log32	9z	Nxp
AG	-	BU2JTA2WNVX	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	SSON004X1216	110vm	VR4	9mc	Rhm
AG	-	BZX884-B10	Z-diode	10V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
AG	-	RP104K201B	LVR-IC	LDO, 2.0V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AG	-	RP105K131B	LVR-IC	LDO, 1.3V±15mV, 400mA, +CE	DFN1212-6	52zd	VR11	9a	Ric
AG	-	RT9013B-35PQWA	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	WDFN-6	49xu	VR4	9a	Rct
AG	-	SN2010W	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.6W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Se
AGA	-	TC1302AGAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGAA	-	TC1301AGAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGAB	-	TC1301AGABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGAC	-	TC1301AGACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGAD	-	TC1301AGADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGAE	-	TC1301AGAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGAF	-	TC1301AGAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGB	-	TC1302AGBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGBA	-	TC1301AGBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGBB	-	TC1301AGBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGBC	-	TC1301AGBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGBD	-	TC1301AGBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGBE	-	TC1301AGBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGBF	-	TC1301AGBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGC	-	TC1302AGCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGCA	-	TC1301AGCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGCB	-	TC1301AGCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGCC	-	TC1301AGCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGCD	-	TC1301AGCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGCE	-	TC1301AGCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGCF	-	TC1301AGCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AGD	-	TC1302AGDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGDA	-	TC1301AGDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGDB	-	TC1301AGDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGDC	-	TC1301AGDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGDD	-	TC1301AGDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGDE	-	TC1301AGDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGDF	-	TC1301AGDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGE	-	TC1302AGEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGEA	-	TC1301AGEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGEB	-	TC1301AGEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGEC	-	TC1301AGECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGED	-	TC1301AGEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGEE	-	TC1301AGEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGEF	-	TC1301AGEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGF	-	MIC5320-1.8/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.5V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
AGF	-	TC1302AGFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGFA	-	TC1301AGFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGFB	-	TC1301AGFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGFC	-	TC1301AGFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGFD	-	TC1301AGFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGFE	-	TC1301AGFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGFF	-	TC1301AGFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGG	-	MIC5320-1.8/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
AGG	-	TC1302AGGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGGA	-	TC1301AGGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGGB	-	TC1301AGGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGGC	-	TC1301AGGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGGD	-	TC1301AGGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGGE	-	TC1301AGGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGGF	-	TC1301AGGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGH	-	TC1302AGHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGHA	-	TC1301AGHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGHB	-	TC1301AGHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGHC	-	TC1301AGHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGHD	-	TC1301AGHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGHE	-	TC1301AGHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGHF	-	TC1301AGHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGI	-	TC1302AGIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGIA	-	TC1301AGIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGIB	-	TC1301AGIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGIC	-	TC1301AGICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGID	-	TC1301AGIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGIE	-	TC1301AGIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGIF	-	TC1301AGIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGJ	-	TC1302AGJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGJA	-	TC1301AGJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGJB	-	TC1301AGJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGJC	-	TC1301AGJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGJD	-	TC1301AGJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGJE	-	TC1301AGJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGJF	-	TC1301AGJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGK	-	TC1302AGKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGKA	-	TC1301AGKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGKB	-	TC1301AGKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGKC	-	TC1301AGKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGKD	-	TC1301AGKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGKE	-	TC1301AGKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGKF	-	TC1301AGKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGL	-	TC1302AGLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGLA	-	TC1301AGLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGLB	-	TC1301AGLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGLC	-	TC1301AGLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGLD	-	TC1301AGLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGLE	-	TC1301AGLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGLF	-	TC1301AGLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGM	-	TC1302AGMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGMA	-	TC1301AGMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGMB	-	TC1301AGMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGMC	-	TC1301AGMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGMD	-	TC1301AGMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AGME	-	TC1301AGMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGMF	-	TC1301AGMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGN	-	TC1302AGNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGNA	-	TC1301AGNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGNB	-	TC1301AGNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGNC	-	TC1301AGNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGND	-	TC1301AGNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGNE	-	TC1301AGNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGNF	-	TC1301AGNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGO	-	TC1302AGOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGOA	-	TC1301AGOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGOB	-	TC1301AGOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGOC	-	TC1301AGOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGOD	-	TC1301AGODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGOE	-	TC1301AGOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGOF	-	TC1301AGOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGP	-	TC1302AGPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGPA	-	TC1301AGPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGPB	-	TC1301AGPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGPC	-	TC1301AGPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGPD	-	TC1301AGPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGPE	-	TC1301AGPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGPF	-	TC1301AGPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGQ	-	TC1302AGQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGQA	-	TC1301AGQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGQB	-	TC1301AGQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGQC	-	TC1301AGQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGQD	-	TC1301AGQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGQE	-	TC1301AGQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGQF	-	TC1301AGQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGR	-	TC1302AGRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGRA	-	TC1301AGRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGRB	-	TC1301AGRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGRC	-	TC1301AGRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGRD	-	TC1301AGRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGRE	-	TC1301AGREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGRF	-	TC1301AGRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGS	-	TC1302AGSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGSA	-	TC1301AGSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGSB	-	TC1301AGSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGSC	-	TC1301AGSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGSD	-	TC1301AGSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGSE	-	TC1301AGSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGSF	-	TC1301AGSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGT	-	TC1302AGTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGTA	-	TC1301AGTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGTB	-	TC1301AGTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGTC	-	TC1301AGTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGTD	-	TC1301AGTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGTE	-	TC1301AGTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGTF	-	TC1301AGTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGU	-	TC1302AGUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGUA	-	TC1301AGUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGUB	-	TC1301AGUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGUC	-	TC1301AGUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGUD	-	TC1301AGUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGUE	-	TC1301AGUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGUF	-	TC1301AGUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGV	-	TC1302AGVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGVA	-	TC1301AGVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGVB	-	TC1301AGVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGVC	-	TC1301AGVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGVD	-	TC1301AGVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGVE	-	TC1301AGVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGVF	-	TC1301AGVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGW	-	MIC5320-1.8/1.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.6V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
AGW	-	TC1302AGWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AGWA	-	TC1301AGWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGWB	-	TC1301AGWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGWC	-	TC1301AGWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AGWD	-	TC1301AGWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGWE	-	TC1301AGWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AGWF	-	TC1301AGWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
aH	-	74AUP1G386GF	CMOS-Log	3-input EXCLUSIVE-OR gate	SOT891	52	Log33	9z	Nxp
aH	-	74AUP1G386GM	CMOS-Log	3-input EXCLUSIVE-OR gate	SOT886	57	Log33	9z	Nxp
aH	-	74LVC1G386GF	CMOS-Log	3-input EXCLUSIVE-OR gate	SOT891	52	Log33	9z	Nxp
AH	-	BU29TA2WNVX	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	SSON004X1216	110vm	VR4	9mc	Rhm
AH	-	BZX884-B11	Z-diode	11V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
AH	-	CP2297LD	Lin-IC	AF PA, BTL, 2.5..5.5V, 3.1W(5V/8Ω), shutdown	DFN-8	92	AFP22	9a	Cpm
AH	-	LD6805K/12H	LVR-IC	LDO, 1.2V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
AH	-	RP104K251B	LVR-IC	LDO, 2.5V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AH	-	RP105K141B	LVR-IC	LDO, 1.4V±15mV, 400mA, +CE	DFN1212-6	52zd	VR11	9a	Ric
AH	-	RT9013B-15PQWA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	WDFN-6	49xu	VR4	9a	Rct
AH	-	XC6221A17B7R	LVR-IC	LDO, 1.75V±20mV, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AH	-	XC6223C26B9R-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AH	-	XC6504A2617R-G	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AH	-	XC9244A24C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.4V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AH-	-	RT9013-33PQV	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	WDFN-8	49	VR4	9a	Rct
AH616	-	XC6113H616ER	Vdet-IC	1.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH617	-	XC6113H617ER	Vdet-IC	1.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH618	-	XC6113H618ER	Vdet-IC	1.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH619	-	XC6113H619ER	Vdet-IC	1.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH620	-	XC6113H620ER	Vdet-IC	2.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH621	-	XC6113H621ER	Vdet-IC	2.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH622	-	XC6113H622ER	Vdet-IC	2.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH623	-	XC6113H623ER	Vdet-IC	2.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH624	-	XC6113H624ER	Vdet-IC	2.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH625	-	XC6113H625ER	Vdet-IC	2.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH626	-	XC6113H626ER	Vdet-IC	2.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH627	-	XC6113H627ER	Vdet-IC	2.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH628	-	XC6113H628ER	Vdet-IC	2.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH629	-	XC6113H629ER	Vdet-IC	2.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH630	-	XC6113H630ER	Vdet-IC	3.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH631	-	XC6113H631ER	Vdet-IC	3.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH632	-	XC6113H632ER	Vdet-IC	3.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH633	-	XC6113H633ER	Vdet-IC	3.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH634	-	XC6113H634ER	Vdet-IC	3.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH635	-	XC6113H635ER	Vdet-IC	3.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH636	-	XC6113H636ER	Vdet-IC	3.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH637	-	XC6113H637ER	Vdet-IC	3.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH638	-	XC6113H638ER	Vdet-IC	3.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH639	-	XC6113H639ER	Vdet-IC	3.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH640	-	XC6113H640ER	Vdet-IC	4.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH641	-	XC6113H641ER	Vdet-IC	4.1V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH642	-	XC6113H642ER	Vdet-IC	4.2V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH643	-	XC6113H643ER	Vdet-IC	4.3V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH644	-	XC6113H644ER	Vdet-IC	4.4V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH645	-	XC6113H645ER	Vdet-IC	4.5V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH646	-	XC6113H646ER	Vdet-IC	4.6V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH647	-	XC6113H647ER	Vdet-IC	4.7V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH648	-	XC6113H648ER	Vdet-IC	4.8V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH649	-	XC6113H649ER	Vdet-IC	4.9V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AH650	-	XC6113H650ER	Vdet-IC	5.0V±2%, -MR, +Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xh	VD17	9b	Tor
AHA	-	MAX9890AETA	Lin-IC	Audio click-pop supress, (36dB), 2.7..5.5V, THD<0.03%(32Ω)	DFN-8	92cb	-	9a	Max
AHA	-	TC1302AHAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHAA	-	TC1301AHAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHAB	-	TC1301AHABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHAC	-	TC1301AHACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHAD	-	TC1301AHADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHAE	-	TC1301AHAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHAF	-	TC1301AHAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHB	-	MAX9890BETA	Lin-IC	Audio click-pop supress, (36dB), 2.7..5.5V, THD<0.03%(32Ω)	DFN-8	92cb	-	9a	Max
AHB	-	TC1302AHBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHB	-	XC6501C12A7R-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHB	-	XC6501C12AGR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHBA	-	TC1301AHBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHBB	-	TC1301AHBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHBC	-	TC1301AHBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHBD	-	TC1301AHBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHBE	-	TC1301AHBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AHBF	-	TC1301AHBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHC	-	TC1302AHCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHC	-	XC6501C13A7R-G	LVR-IC	LDO, 1.35V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHC	-	XC6501C13AGR-G	LVR-IC	LDO, 1.35V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHCA	-	TC1301AHCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHCB	-	TC1301AHCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHCC	-	TC1301AHCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHCD	-	TC1301AHCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHCE	-	TC1301AHCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHCF	-	TC1301AHCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHD	-	TC1302AHDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHD	-	XC6501C14A7R-G	LVR-IC	LDO, 1.45V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHD	-	XC6501C14AGR-G	LVR-IC	LDO, 1.45V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHDA	-	TC1301AHDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHDB	-	TC1301AHDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHDC	-	TC1301AHDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHDD	-	TC1301AHDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHDE	-	TC1301AHDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHDF	-	TC1301AHDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHE	-	TC1302AHEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHE	-	XC6501C15A7R-G	LVR-IC	LDO, 1.55V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHE	-	XC6501C15AGR-G	LVR-IC	LDO, 1.55V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHEA	-	TC1301AHEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHEB	-	TC1301AHEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHEC	-	TC1301AHECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHED	-	TC1301AHEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHEE	-	TC1301AHEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHEF	-	TC1301AHEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHF	-	TC1302AHFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHF	-	XC6501C16A7R-G	LVR-IC	LDO, 1.65V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHF	-	XC6501C16AGR-G	LVR-IC	LDO, 1.65V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHFA	-	TC1301AHFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHFB	-	TC1301AHFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHFC	-	TC1301AHFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHFD	-	TC1301AHFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHFE	-	TC1301AHFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHFF	-	TC1301AHFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHG	-	TC1302AHGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHGA	-	TC1301AHGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHGB	-	TC1301AHGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHGC	-	TC1301AHGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHGD	-	TC1301AHGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHGE	-	TC1301AHGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHGF	-	TC1301AHGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHH	-	TC1302AHHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHH	-	XC6501C17A7R-G	LVR-IC	LDO, 1.75V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHH	-	XC6501C17AGR-G	LVR-IC	LDO, 1.75V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHHA	-	TC1301AHHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHHB	-	TC1301AHHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHHC	-	TC1301AHHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHHD	-	TC1301AHHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHHE	-	TC1301AHHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHHF	-	TC1301AHHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHI	-	MAX6760TALAD3	Vdet-IC	5.0V±1.5%/ADJ, -MR, -UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AHI	-	TC1302AHIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHIA	-	TC1301AHIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHIB	-	TC1301AHIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHIC	-	TC1301AHICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHID	-	TC1301AHIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHIE	-	TC1301AHIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHIF	-	TC1301AHIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHJ	-	MAX6760TATWD3	Vdet-IC	3.3/1.8V±1.5%, -MR, -UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AHJ	-	TC1302AHJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHJA	-	TC1301AHJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHJB	-	TC1301AHJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHJC	-	TC1301AHJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHJD	-	TC1301AHJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHJE	-	TC1301AHJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHJF	-	TC1301AHJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHK	-	TC1302AHKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AHK	-	XC6501C18A7R-G	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHK	-	XC6501C18AGR-G	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHKA	-	TC1301AHKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHKB	-	TC1301AHKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHKC	-	TC1301AHKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHKD	-	TC1301AHKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHKE	-	TC1301AHKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHKF	-	TC1301AHKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHL	-	MAX6760TAWAD3	Vdet-IC	1.8V±1.5%/ADJ, -MR, -UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AHL	-	TC1302AHLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHL	-	XC6501C19A7R-G	LVR-IC	LDO, 1.95V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHL	-	XC6501C19AGR-G	LVR-IC	LDO, 1.95V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHLA	-	TC1301AHLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHLB	-	TC1301AHLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHLC	-	TC1301AHLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHLD	-	TC1301AHLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHLE	-	TC1301AHLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHLF	-	TC1301AHLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHM	-	TC1302AHMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHM	-	XC6501C20A7R-G	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHM	-	XC6501C20AGR-G	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHMA	-	TC1301AHMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHMB	-	TC1301AHMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHMC	-	TC1301AHMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHMD	-	TC1301AHMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHME	-	TC1301AHMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHMF	-	TC1301AHMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHN	-	MAX6761TALAD3	Vdet-IC	5.0V±1.5%/ADJ, -MR, +UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AHN	-	TC1302AHNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHN	-	XC6501C21A7R-G	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHN	-	XC6501C21AGR-G	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHNA	-	TC1301AHNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHNB	-	TC1301AHNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHNC	-	TC1301AHNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHND	-	TC1301AHNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHNE	-	TC1301AHNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHNF	-	TC1301AHNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHO	-	MAX6761TATWD3	Vdet-IC	3.3/1.8V±1.5%, -MR, +UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AHO	-	TC1302AHOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHOA	-	TC1301AHOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHOB	-	TC1301AHOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHOC	-	TC1301AHOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHOD	-	TC1301AHODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHOE	-	TC1301AHOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHOF	-	TC1301AHOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHP	-	TC1302AHPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHP	-	XC6501C22A7R-G	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHP	-	XC6501C22AGR-G	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHPA	-	TC1301AHPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHPB	-	TC1301AHPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHPC	-	TC1301AHPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHPD	-	TC1301AHPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHPE	-	TC1301AHPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHPF	-	TC1301AHPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHQ	-	MAX6761TAWAD3	Vdet-IC	1.8V±1.5%/ADJ, -MR, -UV ODO, -OV ODO	TDFN-8	92	-	9a	Max
AHQ	-	TC1302AHQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHQA	-	TC1301AHQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHQB	-	TC1301AHQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHQC	-	TC1301AHQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHQD	-	TC1301AHQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHQE	-	TC1301AHQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHQF	-	TC1301AHQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHR	-	MAX6762TALAD3	Vdet-IC	5.0V±1.5%/ADJ, -MR, -UV ODO, -OV ODO	TDFN-8	92	-	9a	Max
AHR	-	TC1302AHRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHR	-	XC6501C23A7R-G	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHR	-	XC6501C23AGR-G	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHRA	-	TC1301AHRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHRB	-	TC1301AHRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHRC	-	TC1301AHRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHRD	-	TC1301AHRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AHRE	-	TC1301AHREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHRF	-	TC1301AHRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHS	-	TC1302AHSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHS	-	XC6501C24A7R-G	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHS	-	XC6501C24AGR-G	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHSA	-	TC1301AHSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHSB	-	TC1301AHSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHSC	-	TC1301AHSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHSD	-	TC1301AHSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHSE	-	TC1301AHSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHSF	-	TC1301AHSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHT	-	MAX6762TAZWD3	Vdet-IC	2.5/1.8V±1.5%, -MR, -UV ODO, -OV ODO	TDFN-8	92	-	9a	Max
AHT	-	TC1302AHTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHT	-	XC6501C25A7R-G	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHT	-	XC6501C25AGR-G	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHTA	-	TC1301AHTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHTB	-	TC1301AHTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHTC	-	TC1301AHTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHTD	-	TC1301AHTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHTE	-	TC1301AHTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHTF	-	TC1301AHTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHU	-	TC1302AHUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHU	-	XC6501C26A7R-G	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHU	-	XC6501C26AGR-G	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHUA	-	TC1301AHUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHUB	-	TC1301AHUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHUC	-	TC1301AHUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHUD	-	TC1301AHUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHUE	-	TC1301AHUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHUF	-	TC1301AHUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHV	-	TC1302AHVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHV	-	XC6501C27A7R-G	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHV	-	XC6501C27AGR-G	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHVA	-	TC1301AHVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHVB	-	TC1301AHVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHVC	-	TC1301AHVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHVD	-	TC1301AHVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHVE	-	TC1301AHVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHVF	-	TC1301AHVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHW	-	MAX9716ETA	Lin-IC	AF PA, BTL, 2.7..5.5V 1.4W(5V/4Ω), shutdown	DFN-8	92	AFP12	9m	Max
AHW	-	TC1302AHWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AHWA	-	TC1301AHWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHWB	-	TC1301AHWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHWC	-	TC1301AHWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHWD	-	TC1301AHWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHWE	-	TC1301AHWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHWF	-	TC1301AHWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AHX	-	MAX9717AETA	Lin-IC	AF PA, BTL, 2.7..5.5V 1.4W(5V/4Ω), shutdown	DFN-8	92	AFP23	9m	Max
AHX	-	XC6501C28A7R-G	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHX	-	XC6501C28AGR-G	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHY	-	MAX9717BETA	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), shutdown	DFN-8	92	AFP36	9m	Max
AHY	-	XC6501C29A7R-G	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHY	-	XC6501C29AGR-G	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AHZ	-	MAX9717CETA	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), shutdown	DFN-8	92	AFP36	9m	Max
AHZ	-	XC6501C30A7R-G	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AHZ	-	XC6501C30AGR-G	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
al	-	BU1CUA3WNVX	LVR-IC	LDO, 1.25V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
AI	-	CP2297ITL	Lin-IC	AF PA, BTL, 2.5..5.5V, 3.1W(5V/4Ω), shutdown	BGA-9	39	AFP51	9a	Cpm
AIA	-	MAX9717DETA	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.4W(5V/4Ω), shutdown	DFN-8	92	AFP36	9m	Max
AIA	-	TC1302AIAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIAA	-	TC1301AIAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIAB	-	TC1301AIABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIAC	-	TC1301AIACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIAD	-	TC1301AIADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIAE	-	TC1301AIAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIAF	-	TC1301AIAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIB	-	TC1302AIBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIBA	-	TC1301AIBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIBB	-	TC1301AIBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIBC	-	TC1301AIBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AIBD	-	TC1301AIBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIBE	-	TC1301AIBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIBF	-	TC1301AIBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIC	-	TC1302AICVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AICA	-	TC1301AICAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AICB	-	TC1301AICBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AICC	-	TC1301AICCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AICD	-	TC1301AICDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AICE	-	TC1301AICEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AICF	-	TC1301AICFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AID	-	TC1302AIDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIDA	-	TC1301AIDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIDB	-	TC1301AIDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIDC	-	TC1301AIDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIDD	-	TC1301AIDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIDE	-	TC1301AIDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIDF	-	TC1301AIDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIE	-	TC1302AIEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIEA	-	TC1301AIEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIEB	-	TC1301AIEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIEC	-	TC1301AIECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIED	-	TC1301AIEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIEE	-	TC1301AIEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIEF	-	TC1301AIEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIF	-	MAX97220AETE+	Lin-IC	AF PA, 2.4..5.5V, 2x125mW(3V/32Ω), shutdown	QFN-16	38	-	9m	Max
AIF	-	TC1302AIFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIFA	-	TC1301AIFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIFB	-	TC1301AIFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIFC	-	TC1301AIFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIFD	-	TC1301AIFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIFE	-	TC1301AIFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIFF	-	TC1301AIFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIFI	-	TPA6140A2YF	Lin-IC	AF PA, 2.5..5.5V, 2x32mW(5V/16Ω), I2C	BGA-16	39	-	9a	Ti
AIG	-	MAX97220BETE+	Lin-IC	AF PA, 2.4..5.5V, 2x125mW(3V/32Ω), shutdown	QFN-16	38	-	9m	Max
AIG	-	TC1302AIGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIGA	-	TC1301AIGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIGB	-	TC1301AIGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIGC	-	TC1301AIGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIGD	-	TC1301AIGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIGE	-	TC1301AIGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIGF	-	TC1301AIGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIH	-	MAX97220CETE+	Lin-IC	AF PA, 2.4..5.5V, 2x125mW(3V/32Ω), shutdown	QFN-16	38	-	9m	Max
AIH	-	MAX98300EWL+	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 2.6W(5V/4Ω), shutdown	BGA-9	39	-	9m	Max
AIH	-	TC1302AIHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIHA	-	TC1301AIHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIHB	-	TC1301AIHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIHC	-	TC1301AIHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIHD	-	TC1301AIHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIHE	-	TC1301AIHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIHF	-	TC1301AIHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AII	-	MAX97220DETE+	Lin-IC	AF PA, 2.4..5.5V, 2x125mW(3V/32Ω), shutdown	QFN-16	38	-	9m	Max
AII	-	TC1302AIIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIIA	-	TC1301AIIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIIB	-	TC1301AIIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIIC	-	TC1301AIICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIID	-	TC1301AIIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIIE	-	TC1301AIIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIIF	-	TC1301AIIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIJ	-	TC1302AIJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIJA	-	TC1301AIJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIJB	-	TC1301AIJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIJC	-	TC1301AIJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIJD	-	TC1301AIJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIJE	-	TC1301AIJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIJF	-	TC1301AIJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIK	-	TC1302AIKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIKA	-	TC1301AIKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIKB	-	TC1301AIKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIKC	-	TC1301AIKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIKD	-	TC1301AIKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AIKE	-	TC1301AIKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIKF	-	TC1301AIKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIL	-	TC1302AILVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AILA	-	TC1301AILAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AILB	-	TC1301AILBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AILC	-	TC1301AILCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AILD	-	TC1301AILDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AILE	-	TC1301AILEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AILF	-	TC1301AILFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIM	-	TC1302AIMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIMA	-	TC1301AIMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIMB	-	TC1301AIMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIMC	-	TC1301AIMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIMD	-	TC1301AIMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIME	-	TC1301AIMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIMF	-	TC1301AIMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIN	-	TC1302AINVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AINA	-	TC1301AINAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AINB	-	TC1301AINBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AINC	-	TC1301AINCVMF	Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIND	-	TC1301AINDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AINE	-	TC1301AINEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AINF	-	TC1301AINFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIO	-	MAX6760TALTD3	Vdet-IC	5.0/3.3V±1.5%, -MR, -UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AIO	-	TC1302AIOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIOA	-	TC1301AIOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIOB	-	TC1301AIOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIOC	-	TC1301AIOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIOD	-	TC1301AIODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIOE	-	TC1301AIOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIOF	-	TC1301AIOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIP	-	TC1302AIPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIPA	-	TC1301AIPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIPB	-	TC1301AIPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIPC	-	TC1301AIPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIPD	-	TC1301AIPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIPE	-	TC1301AIPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIPF	-	TC1301AIPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIQ	-	TC1302AIQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIQA	-	TC1301AIQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIQB	-	TC1301AIQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIQC	-	TC1301AIQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIQD	-	TC1301AIQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIQE	-	TC1301AIQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIQF	-	TC1301AIQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIR	-	MAX6760TATZD3	Vdet-IC	3.3/2.5V±1.5%, -MR, -UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AIR	-	MAX98304EWL+	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 3.1W(5V/4Ω), shutdown	BGA-9	39	-	9m	Max
AIR	-	TC1302AIRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIRA	-	TC1301AIRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIRB	-	TC1301AIRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIRC	-	TC1301AIRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIRD	-	TC1301AIRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIRE	-	TC1301AIREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIRF	-	TC1301AIRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIS	-	TC1302AISVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AISA	-	TC1301AISAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AISB	-	TC1301AISBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AISC	-	TC1301AISCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AISD	-	TC1301AISDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AISE	-	TC1301AISEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AISF	-	TC1301AISFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIT	-	MAX6760TATAD3	Vdet-IC	3.3V±1.5%/ADJ, -MR, -UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AIT	-	TC1302AITVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AITA	-	TC1301AITAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AITB	-	TC1301AITBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AITC	-	TC1301AITCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AITD	-	TC1301AITDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AITE	-	TC1301AITEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AITF	-	TC1301AITFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIU	-	TC1302AIUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AIUA	-	TC1301AIUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIUB	-	TC1301AIUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIUC	-	TC1301AIUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIUD	-	TC1301AIUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIUE	-	TC1301AIUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIUF	-	TC1301AIUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIV	-	MAX6760TARAD3	Vdet-IC	3.0V±1.5%/ADJ, -MR, -UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AIV	-	TC1302AIVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIVA	-	TC1301AIVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIVB	-	TC1301AIVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIVC	-	TC1301AIVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIVD	-	TC1301AIVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIVE	-	TC1301AIVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIVF	-	TC1301AIVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIW	-	TC1302AIWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AIWA	-	TC1301AIWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIWB	-	TC1301AIWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIWC	-	TC1301AIWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIWD	-	TC1301AIWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIWE	-	TC1301AIWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIWF	-	TC1301AIWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AIWI	-	TPA6132A2RT	Lin-IC	AF PA, 2.5..5.5V, 2x25mW(5V/16Ω), enable	QFN-16	38	-	9a	Ti
AIX	-	MAX6760TAZWD3	Vdet-IC	2.5/1.8V±1.5%, -MR, -UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AIZ	-	MAX6760TAZAD3	Vdet-IC	2.5V±1.5%/ADJ, -MR, -UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AJ	-	BU30TA2WNVX	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	SSON004X1216	110vm	VR4	9mc	Rhm
AJ	-	BZX884-B12	Z-diode	12V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
AJ	-	RP104K261B	LVR-IC	LDO, 2.6V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AJ	-	RP105K151B	LVR-IC	LDO, 1.5V±15mV, 400mA, +CE	DFN1212-6	52zd	VR11	9a	Ric
AJ-	-	RT9013-1BPQV	LVR-IC	LDO, 1.25V±2%, 500mA, +CE	WDFN-8	49	VR4	9a	Rct
AJA	-	TC1302AJAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJAA	-	TC1301AJAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJAB	-	TC1301AJABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJAC	-	TC1301AJACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJAD	-	TC1301AJADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJAE	-	TC1301AJAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJAF	-	TC1301AJAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJB	-	MAX6760TAWED3	Vdet-IC	1.8/0.9V±1.5%, -MR, -UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AJB	-	TC1302AJBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJBA	-	TC1301AJBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJBB	-	TC1301AJBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJBC	-	TC1301AJBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJBD	-	TC1301AJBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJBE	-	TC1301AJBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJBF	-	TC1301AJBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJC	-	TC1302AJCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJCA	-	TC1301AJCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJCB	-	TC1301AJCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJCC	-	TC1301AJCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJCD	-	TC1301AJCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJCE	-	TC1301AJCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJCF	-	TC1301AJCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJD	-	MAX6761TALTD3	Vdet-IC	5.0V/3.3±1.5%V, -MR, +UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AJD	-	TC1302AJDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJDA	-	TC1301AJDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJDB	-	TC1301AJDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJDC	-	TC1301AJDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJDD	-	TC1301AJDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJDE	-	TC1301AJDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJDF	-	TC1301AJDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJE	-	TC1302AJEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJEA	-	TC1301AJEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJEB	-	TC1301AJEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJEC	-	TC1301AJECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJED	-	TC1301AJEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJEE	-	TC1301AJEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJEF	-	TC1301AJEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJF	-	TC1302AJFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJFA	-	TC1301AJFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJFB	-	TC1301AJFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJFC	-	TC1301AJFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AJFD	-	TC1301AJFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJFE	-	TC1301AJFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJFF	-	TC1301AJFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJG	-	MAX6761TATZD3	Vdet-IC	3.3/2.5V±1.5%, -MR, +UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AJG	-	MIC5320-2.5/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
AJG	-	TC1302AJGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJG	mb	MIC5320-2.5/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9i	Mcr
AJGA	-	TC1301AJGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJGB	-	TC1301AJGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJGC	-	TC1301AJGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJGD	-	TC1301AJGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJGE	-	TC1301AJGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJGF	-	TC1301AJGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJH	-	TC1302AJHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJHA	-	TC1301AJHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJHB	-	TC1301AJHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJHC	-	TC1301AJHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJHD	-	TC1301AJHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJHE	-	TC1301AJHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJHF	-	TC1301AJHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJI	-	MAX6761TATAD3	Vdet-IC	3.3V±1.5%/ADJ, -MR, +UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AJI	-	TC1302AJIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJIA	-	TC1301AJIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJIB	-	TC1301AJIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJIC	-	TC1301AJICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJID	-	TC1301AJIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJIE	-	TC1301AJIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJIF	-	TC1301AJIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJJ	-	MIC5320-2.5/2.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.5V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
AJJ	-	TC1302AJJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJJ	mb	MIC5320-2.5/2.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.5V±2%, 150mA, +CE	MLF-6	74g0	VR19	9i	Mcr
AJJA	-	TC1301AJJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJJB	-	TC1301AJJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJJC	-	TC1301AJJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJJD	-	TC1301AJJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJJE	-	TC1301AJJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJJF	-	TC1301AJJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJK	-	MAX6761TARAD3	Vdet-IC	3.0V±1.5%/ADJ, -MR, +UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AJK	-	TC1302AJKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJKA	-	TC1301AJKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJKB	-	TC1301AJKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJKC	-	TC1301AJKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJKD	-	TC1301AJKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJKE	-	TC1301AJKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJKF	-	TC1301AJKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJL	-	TC1302AJLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJLA	-	TC1301AJLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJLB	-	TC1301AJLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJLC	-	TC1301AJLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJLD	-	TC1301AJLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJLE	-	TC1301AJLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJLF	-	TC1301AJLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJM	-	MAX6761TAZWD3	Vdet-IC	2.5/1.8V±1.5%, -MR, +UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AJM	-	TC1302AJMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJMA	-	TC1301AJMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJMB	-	TC1301AJMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJMC	-	TC1301AJMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJMD	-	TC1301AJMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJME	-	TC1301AJMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJMF	-	TC1301AJMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJN	-	TC1302AJNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJNA	-	TC1301AJNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJNB	-	TC1301AJNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJNC	-	TC1301AJNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJND	-	TC1301AJNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJNE	-	TC1301AJNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJNF	-	TC1301AJNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJO	-	MAX6761TAZAD3	Vdet-IC	2.5V±1.5%/ADJ, -MR, +UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AJO	-	TC1302AJOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJOA	-	TC1301AJOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AJOB	-	TC1301AJOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJOC	-	TC1301AJOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJOD	-	TC1301AJODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJOE	-	TC1301AJOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJOF	-	TC1301AJOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJP	-	TC1302AJPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJPA	-	TC1301AJPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJPB	-	TC1301AJPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJPC	-	TC1301AJPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJPD	-	TC1301AJPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJPE	-	TC1301AJPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJPF	-	TC1301AJPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJQ	-	MAX6761TAWED3	Vdet-IC	1.8/0.9V±1.5%, -MR, +UV PPO, -OV ODO	TDFN-8	92	-	9a	Max
AJQ	-	TC1302AJQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJQA	-	TC1301AJQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJQB	-	TC1301AJQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJQC	-	TC1301AJQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJQD	-	TC1301AJQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJQE	-	TC1301AJQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJQF	-	TC1301AJQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJR	-	TC1302AJRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJRA	-	TC1301AJRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJRB	-	TC1301AJRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJRC	-	TC1301AJRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJRD	-	TC1301AJRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJRE	-	TC1301AJREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJRF	-	TC1301AJRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJS	-	TC1302AJSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJSA	-	TC1301AJSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJSB	-	TC1301AJSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJSC	-	TC1301AJSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJSD	-	TC1301AJSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJSE	-	TC1301AJSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJSF	-	TC1301AJSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJT	-	MAX6762TALTD3	Vdet-IC	5.0/3.3V±1.5%, -MR, -UV ODO, -OV ODO	TDFN-8	92	-	9a	Max
AJT	-	TC1302AJTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJTA	-	TC1301AJTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJTB	-	TC1301AJTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJTC	-	TC1301AJTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJTD	-	TC1301AJTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJTE	-	TC1301AJTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJTF	-	TC1301AJTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJU	-	TC1302AJUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJUA	-	TC1301AJUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJUB	-	TC1301AJUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJUC	-	TC1301AJUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJUD	-	TC1301AJUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJUE	-	TC1301AJUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJUF	-	TC1301AJUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJV	-	TC1302AJVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJVA	-	TC1301AJVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJVB	-	TC1301AJVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJVC	-	TC1301AJVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJVD	-	TC1301AJVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJVE	-	TC1301AJVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJVF	-	TC1301AJVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJW	-	MAX6762TATZD3	Vdet-IC	3.3/2.5V±1.5%, -MR, -UV ODO, -OV ODO	TDFN-8	92	-	9a	Max
AJW	-	TC1302AJWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AJWA	-	TC1301AJWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJWB	-	TC1301AJWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJWC	-	TC1301AJWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJWD	-	TC1301AJWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJWE	-	TC1301AJWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJWF	-	TC1301AJWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AJY	-	MAX6762TATWD3	Vdet-IC	3.3/1.8V±1.5%, -MR, -UV ODO, -OV ODO	TDFN-8	92	-	9a	Max
AJZ	-	STH4010YEF	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.5W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Sit
AJZ	-	TPA2010D1YEF	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.5W(5V/8Ω), shutdown	BGA-9	39	AFP45	9a	Ti
aK	-	74AUP1G58GF	CMOS-Log	Configurable multiple-function gate	SOT891	52	Log37	9z	Nxp
aK	-	74AUP1G58GM	CMOS-Log	Configurable multiple-function gate	SOT886	57	Log37	9z	Nxp
AK	-	BU31TA2WNVX	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	SSON004X1216	110vm	VR4	9mc	Rhm

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AK	-	BZX884-B13	Z-diode	13V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
AK	-	CP2293LD	Lin-IC	AF PA, BTL, 2.5..5.5V, 3W(5V/8Ω), shutdown	DFN-8	92	AFP22	9a	Cpm
AK	-	RP104K271B	LVR-IC	LDO, 2.7V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AK	-	RP105K111B	LVR-IC	LDO, 1.1V±15mV, 400mA, +CE	DFN1212-6	52zd	VR11	9a	Ric
AK	-	XC6221A18B7R	LVR-IC	LDO, 1.85V±20mV, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AK	-	XC6223C27B9R-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AK	-	XC6504A2717R-G	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AK	-	XC9244A25C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.5V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AKA	-	MAX6762TATAD3	Vdet-IC	3.3V±1.5%/ADJ, -MR, -UV ODO, -OV ODO	TDFN-8	92	-	9a	Max
AKA	-	TC1302AKAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKAA	-	TC1301AKAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKAB	-	TC1301AKABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKAC	-	TC1301AKACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKAD	-	TC1301AKADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKAE	-	TC1301AKAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKAF	-	TC1301AKAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKB	-	MAX6762TARAD3	Vdet-IC	3.0V±1.5%/ADJ, -MR, -UV ODO, -OV ODO	TDFN-8	92	-	9a	Max
AKB	-	TC1302AKBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKB	-	XC6501D12A7R-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKB	-	XC6501D12AGR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKBA	-	TC1301AKBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKBB	-	TC1301AKBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKBC	-	TC1301AKBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKBD	-	TC1301AKBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKBE	-	TC1301AKBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKBF	-	TC1301AKBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKC	-	TC1302AKCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKC	-	XC6501D13A7R-G	LVR-IC	LDO, 1.35V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKC	-	XC6501D13AGR-G	LVR-IC	LDO, 1.35V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKCA	-	TC1301AKCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKCB	-	TC1301AKCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKCC	-	TC1301AKCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKCD	-	TC1301AKCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKCE	-	TC1301AKCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKCF	-	TC1301AKCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKD	-	MIC5320-2.6/1.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/1.85±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
AKD	-	TC1302AKDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKD	-	XC6501D14A7R-G	LVR-IC	LDO, 1.45V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKD	-	XC6501D14AGR-G	LVR-IC	LDO, 1.45V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKDA	-	TC1301AKDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKDB	-	TC1301AKDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKDC	-	TC1301AKDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKDD	-	TC1301AKDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKDE	-	TC1301AKDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKDF	-	TC1301AKDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKE	-	MAX6762TAZAD3	Vdet-IC	2.5V±1.5%/ADJ, -MR, -UV ODO, -OV ODO	TDFN-8	92	-	9a	Max
AKE	-	TC1302AKEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKE	-	XC6501D15A7R-G	LVR-IC	LDO, 1.55V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKE	-	XC6501D15AGR-G	LVR-IC	LDO, 1.55V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKEA	-	TC1301AKEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKEB	-	TC1301AKEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKEC	-	TC1301AKECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKED	-	TC1301AKEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKEE	-	TC1301AKEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKEF	-	TC1301AKEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKF	-	MAX6762TAWED3	Vdet-IC	1.8/0.9V±1.5%, -MR, -UV ODO, -OV ODO	TDFN-8	92	-	9a	Max
AKF	-	TC1302AKFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKF	-	XC6501D16A7R-G	LVR-IC	LDO, 1.65V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKF	-	XC6501D16AGR-G	LVR-IC	LDO, 1.65V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKFA	-	TC1301AKFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKFB	-	TC1301AKFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKFC	-	TC1301AKFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKFD	-	TC1301AKFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKFE	-	TC1301AKFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKFF	-	TC1301AKFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKG	-	MIC5320-2.6/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/1.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
AKG	-	TC1302AKGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKG	mb	MIC5320-2.6/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/1.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9i	Mcr
AKGA	-	TC1301AKGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKGB	-	TC1301AKGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AKGC	-	TC1301AKGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKGD	-	TC1301AKGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKGE	-	TC1301AKGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKGF	-	TC1301AKGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKH	-	MAX6762TAWAD3	Vdet-IC	1.8V±1.5%/ADJ, -MR, -UV ODO, -OV ODO	TDFN-8	92	-	9a	Max
AKH	-	TC1302AKHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKH	-	XC6501D17A7R-G	LVR-IC	LDO, 1.75V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKH	-	XC6501D17AGR-G	LVR-IC	LDO, 1.75V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKHA	-	TC1301AKHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKHB	-	TC1301AKHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKHC	-	TC1301AKHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKHD	-	TC1301AKHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKHE	-	TC1301AKHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKHF	-	TC1301AKHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKI	-	TC1302AKIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKIA	-	TC1301AKIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKIB	-	TC1301AKIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKIC	-	TC1301AKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKID	-	TC1301AKIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKIE	-	TC1301AKIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKIF	-	TC1301AKIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKJ	-	TC1302AKJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKJA	-	TC1301AKJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKJB	-	TC1301AKJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKJC	-	TC1301AKJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKJD	-	TC1301AKJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKJE	-	TC1301AKJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKJF	-	TC1301AKJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKK	-	TC1302AKKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKK	-	XC6501D18A7R-G	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKK	-	XC6501D18AGR-G	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKKA	-	TC1301AKKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKKB	-	TC1301AKKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKKC	-	TC1301AKKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKKD	-	TC1301AKKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKKE	-	TC1301AKKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKKF	-	TC1301AKKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKL	-	TC1302AKLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKL	-	XC6501D19A7R-G	LVR-IC	LDO, 1.95V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKL	-	XC6501D19AGR-G	LVR-IC	LDO, 1.95V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKLA	-	TC1301AKLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKLB	-	TC1301AKLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKLC	-	TC1301AKLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKLD	-	TC1301AKLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKLE	-	TC1301AKLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKLF	-	TC1301AKLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKM	-	TC1302AKMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKM	-	XC6501D20A7R-G	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKM	-	XC6501D20AGR-G	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKMA	-	TC1301AKMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKMB	-	TC1301AKMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKMC	-	TC1301AKMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKMD	-	TC1301AKMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKME	-	TC1301AKMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKMF	-	TC1301AKMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKN	-	TC1302AKNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKN	-	XC6501D21A7R-G	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKN	-	XC6501D21AGR-G	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKNA	-	TC1301AKNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKNB	-	TC1301AKNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKNC	-	TC1301AKNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKND	-	TC1301AKNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKNE	-	TC1301AKNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKNF	-	TC1301AKNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKO	-	STH4010YZF	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.5W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Sit
AKO	-	TC1302AKOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKO	-	TPA2010D1YZF	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.5W(5V/8Ω), shutdown	BGA-9	39	AFP45	9a	Ti
AKOA	-	TC1301AKOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKOB	-	TC1301AKOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKOC	-	TC1301AKOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AKOD	-	TC1301AKODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKOE	-	TC1301AKOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKOF	-	TC1301AKOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKP	-	TC1302AKPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKP	-	XC6501D22A7R-G	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKP	-	XC6501D22AGR-G	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKPA	-	TC1301AKPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKPB	-	TC1301AKPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKPC	-	TC1301AKPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKPD	-	TC1301AKPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKPE	-	TC1301AKPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKPF	-	TC1301AKPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKQ	-	TC1302AKQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKQ	-	TPA4411RTJ	Lin-IC	AF PA, 1.8..4.5V, 2x80mW(4V/16Ω), shutdown	QFN-20	38	-	9a	Ti
AKQA	-	TC1301AKQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKQB	-	TC1301AKQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKQC	-	TC1301AKQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKQD	-	TC1301AKQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKQE	-	TC1301AKQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKQF	-	TC1301AKQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKR	-	TC1302AKRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKR	-	TPA2012D2YZH	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x2.1W(5V/4Ω), shutdown	BGA-16	39	AFP46	9a	Ti
AKR	-	XC6501D23A7R-G	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKR	-	XC6501D23AGR-G	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKRA	-	TC1301AKRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKRB	-	TC1301AKRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKRC	-	TC1301AKRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKRD	-	TC1301AKRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKRE	-	TC1301AKREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKRF	-	TC1301AKRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKS	-	TC1302AKSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKS	-	TPA2012D2RTJ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x2.1W(5V/4Ω), shutdown	QFN-20	38	-	9a	Ti
AKS	-	XC6501D24A7R-G	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKS	-	XC6501D24AGR-G	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKSA	-	TC1301AKSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKSB	-	TC1301AKSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKSC	-	TC1301AKSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKSD	-	TC1301AKSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKSE	-	TC1301AKSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKSF	-	TC1301AKSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKT	-	TC1302AKTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKT	-	TPA4411YZH	Lin-IC	AF PA, 1.8..4.5V, 2x80mW(4V/16Ω), shutdown	BGA-16	39	-	9a	Ti
AKT	-	XC6501D25A7R-G	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKT	-	XC6501D25AGR-G	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKTA	-	TC1301AKTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKTB	-	TC1301AKTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKTC	-	TC1301AKTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKTD	-	TC1301AKTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKTE	-	TC1301AKTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKTF	-	TC1301AKTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKU	-	TC1302AKUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKU	-	XC6501D26A7R-G	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKU	-	XC6501D26AGR-G	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKUA	-	TC1301AKUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKUB	-	TC1301AKUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKUC	-	TC1301AKUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKUD	-	TC1301AKUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKUE	-	TC1301AKUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKUF	-	TC1301AKUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKV	-	TC1302AKVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKV	-	XC6501D27A7R-G	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKV	-	XC6501D27AGR-G	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKVA	-	TC1301AKVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKVB	-	TC1301AKVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKVC	-	TC1301AKVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKVD	-	TC1301AKVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKVE	-	TC1301AKVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKVF	-	TC1301AKVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKW	-	TC1302AKWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AKWA	-	TC1301AKWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AKWB	-	TC1301AKWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKWC	-	TC1301AKWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKWD	-	TC1301AKWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKWE	-	TC1301AKWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKWF	-	TC1301AKWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AKX	-	XC6501D28A7R-G	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKX	-	XC6501D28AGR-G	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKY	-	XC6501D29A7R-G	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKY	-	XC6501D29AGR-G	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AKZ	-	XC6501D30A7R-G	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AKZ	-	XC6501D30AGR-G	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AL	-	BU32TA2WNVX	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	SSON004X1216	110vm	VR4	9mc	Rhm
AL	-	BZX884-B15	Z-diode	15V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
AL	-	CP2293ITL	Lin-IC	AF PA, BTL, 2.5..5.5V, 3W(5V/8Ω), shutdown	BGA-8A	39	AFP47	9a	Cpm
AL	-	MAX8840EYT27+T	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	DFN-6	52	VR7a	9t	Max
AL	-	RP104K281B	LVR-IC	LDO, 2.8V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AL	-	XC6221A19B7R	LVR-IC	LDO, 1.95V±20mV, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AL	-	XC6223C28B9R-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AL	-	XC6504A2817R-G	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AL	-	XC9244A26C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.6V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AL0	-	XC9260A20DER-G	DC-DC-IC	PWM step-down, 2.0V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AL1	-	XC9260A21DER-G	DC-DC-IC	PWM step-down, 2.1V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AL2	-	XC9260A22DER-G	DC-DC-IC	PWM step-down, 2.2V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AL3	-	XC9260A23DER-G	DC-DC-IC	PWM step-down, 2.3V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AL4	-	XC9260A24DER-G	DC-DC-IC	PWM step-down, 2.4V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AL5	-	XC9260A25DER-G	DC-DC-IC	PWM step-down, 2.5V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AL6	-	XC9260A26DER-G	DC-DC-IC	PWM step-down, 2.6V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AL7	-	XC9260A27DER-G	DC-DC-IC	PWM step-down, 2.7V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AL8	-	XC9260A28DER-G	DC-DC-IC	PWM step-down, 2.8V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AL9	-	XC9260A29DER-G	DC-DC-IC	PWM step-down, 2.9V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ALA	-	TC1302ALAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALA	-	XC9260A2ADER-G	DC-DC-IC	PWM step-down, 2.05V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ALAA	-	TC1301ALAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALAB	-	TC1301ALABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALAC	-	TC1301ALACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALAD	-	TC1301ALADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALAE	-	TC1301ALAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALAF	-	TC1301ALAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALB	-	TC1302ALBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALB	-	XC6501P12AHR-G	LVR-IC	LDO, 1.5V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALB	-	XC9260A2BDER-G	DC-DC-IC	PWM step-down, 2.15V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ALBA	-	TC1301ALBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALBB	-	TC1301ALBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALBC	-	TC1301ALBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALBD	-	TC1301ALBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALBE	-	TC1301ALBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALBF	-	TC1301ALBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALC	-	TC1302ALCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALC	-	XC6501P13AHR-G	LVR-IC	LDO, 1.35V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALC	-	XC9260A2CDER-G	DC-DC-IC	PWM step-down, 2.25V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ALCA	-	TC1301ALCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALCB	-	TC1301ALCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALCC	-	TC1301ALCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALCD	-	TC1301ALCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALCE	-	TC1301ALCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALCF	-	TC1301ALCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALD	-	TC1302ALDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALD	-	XC6501P14AHR-G	LVR-IC	LDO, 1.45V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALD	-	XC9260A2DDER-G	DC-DC-IC	PWM step-down, 2.35V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ALDA	-	TC1301ALDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALDB	-	TC1301ALDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALDC	-	TC1301ALDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALDD	-	TC1301ALDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALDE	-	TC1301ALDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALDF	-	TC1301ALDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALE	-	TC1302ALEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALE	-	XC6501P15AHR-G	LVR-IC	LDO, 1.55V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALE	-	XC9260A2EDER-G	DC-DC-IC	PWM step-down, 2.45V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ALEA	-	TC1301ALEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALEB	-	TC1301ALEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ALEC	-	TC1301ALECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALED	-	TC1301ALEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALEE	-	TC1301ALEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALEF	-	TC1301ALEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALF	-	TC1302ALFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALF	-	XC6501P16AHR-G	LVR-IC	LDO, 1.65V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALF	-	XC9260A2FDER-G	DC-DC-IC	PWM step-down, 2.55V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ALFA	-	TC1301ALFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALFB	-	TC1301ALFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALFC	-	TC1301ALFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALFD	-	TC1301ALFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALFE	-	TC1301ALFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALFF	-	TC1301ALFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALG	-	TC1302ALGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALGA	-	TC1301ALGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALGB	-	TC1301ALGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALGC	-	TC1301ALGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALGD	-	TC1301ALGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALGE	-	TC1301ALGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALGF	-	TC1301ALGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALH	-	TC1302ALHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALH	-	XC6501P17AHR-G	LVR-IC	LDO, 1.75V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALH	-	XC9260A2HDER-G	DC-DC-IC	PWM step-down, 2.65V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ALHA	-	TC1301ALHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALHB	-	TC1301ALHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALHC	-	TC1301ALHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALHD	-	TC1301ALHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALHE	-	TC1301ALHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALHF	-	TC1301ALHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALI	-	TC1302ALIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALIA	-	TC1301ALIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALIB	-	TC1301ALIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALIC	-	TC1301ALICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALID	-	TC1301ALIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALIE	-	TC1301ALIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALIF	-	TC1301ALIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALJ	-	TC1302ALJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALJA	-	TC1301ALJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALJB	-	TC1301ALJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALJC	-	TC1301ALJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALJD	-	TC1301ALJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALJE	-	TC1301ALJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALJF	-	TC1301ALJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALK	-	TC1302ALKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALK	-	XC6501P18AHR-G	LVR-IC	LDO, 1.85V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALK	-	XC9260A2KDER-G	DC-DC-IC	PWM step-down, 2.75V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ALKA	-	TC1301ALKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALKB	-	TC1301ALKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALKC	-	TC1301ALKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALKD	-	TC1301ALKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALKE	-	TC1301ALKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALKF	-	TC1301ALKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALL	-	MIC5320-2.7/2.7YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.7V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
ALL	-	TC1302ALLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALL	-	XC6501P19AHR-G	LVR-IC	LDO, 1.95V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALL	-	XC9260A2LDER-G	DC-DC-IC	PWM step-down, 2.85V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ALL	mb	MIC5320-2.7/2.7YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.7V±2%, 150mA, +CE	MLF-6	74g0	VR19	9i	Mcr
ALLA	-	TC1301ALLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALLB	-	TC1301ALLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALLC	-	TC1301ALLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALLD	-	TC1301ALLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALLE	-	TC1301ALLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALLF	-	TC1301ALLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALM	-	TC1302ALMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALM	-	XC6501P20AHR-G	LVR-IC	LDO, 2.05V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALM	-	XC9260A2MDER-G	DC-DC-IC	PWM step-down, 2.95V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ALMA	-	TC1301ALMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALMB	-	TC1301ALMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALMC	-	TC1301ALMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALMD	-	TC1301ALMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ALME	-	TC1301ALMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALMF	-	TC1301ALMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALN	-	TC1302ALNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALN	-	XC6501P21AHR-G	LVR-IC	LDO, 2.15V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALNA	-	TC1301ALNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALNB	-	TC1301ALNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALNC	-	TC1301ALNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALND	-	TC1301ALNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALNE	-	TC1301ALNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALNF	-	TC1301ALNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALO	-	TC1302ALOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALOA	-	TC1301ALOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALOB	-	TC1301ALOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALOC	-	TC1301ALOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALOD	-	TC1301ALODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALOE	-	TC1301ALOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALOF	-	TC1301ALOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALP	-	TC1302ALPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALP	-	XC6501P22AHR-G	LVR-IC	LDO, 2.25V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALPA	-	TC1301ALPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALPB	-	TC1301ALPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALPC	-	TC1301ALPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALPD	-	TC1301ALPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALPE	-	TC1301ALPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALPF	-	TC1301ALPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALQ	-	TC1302ALQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALQA	-	TC1301ALQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALQB	-	TC1301ALQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALQC	-	TC1301ALQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALQD	-	TC1301ALQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALQE	-	TC1301ALQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALQF	-	TC1301ALQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALR	-	TC1302ALRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALR	-	XC6501P23AHR-G	LVR-IC	LDO, 2.35V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALRA	-	TC1301ALRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALRB	-	TC1301ALRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALRC	-	TC1301ALRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALRD	-	TC1301ALRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALRE	-	TC1301ALREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALRF	-	TC1301ALRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALS	-	TC1302ALSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALS	-	XC6501P24AHR-G	LVR-IC	LDO, 2.45V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALSA	-	TC1301ALSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALSB	-	TC1301ALSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALSC	-	TC1301ALSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALSD	-	TC1301ALSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALSE	-	TC1301ALSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALSF	-	TC1301ALSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALT	-	TC1302ALTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALT	-	XC6501P25AHR-G	LVR-IC	LDO, 2.55V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALTA	-	TC1301ALTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALTB	-	TC1301ALTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALTC	-	TC1301ALTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALTD	-	TC1301ALTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALTE	-	TC1301ALTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALTF	-	TC1301ALTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALU	-	TC1302ALUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALU	-	XC6501P26AHR-G	LVR-IC	LDO, 2.65V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALUA	-	TC1301ALUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALUB	-	TC1301ALUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALUC	-	TC1301ALUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALUD	-	TC1301ALUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALUE	-	TC1301ALUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALUF	-	TC1301ALUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALV	-	TC1302ALVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALV	-	XC6501P27AHR-G	LVR-IC	LDO, 2.75V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALVA	-	TC1301ALVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALVB	-	TC1301ALVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALVC	-	TC1301ALVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALVD	-	TC1301ALVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ALVE	-	TC1301ALVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALVF	-	TC1301ALVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALW	-	TC1302ALWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ALWA	-	TC1301ALWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALWB	-	TC1301ALWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALWC	-	TC1301ALWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALWD	-	TC1301ALWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALWE	-	TC1301ALWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALWF	-	TC1301ALWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ALX	-	XC6501P28AHR-G	LVR-IC	LDO, 2.85V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALY	-	XC6501P29AHR-G	LVR-IC	LDO, 2.95V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ALZ	-	XC6501P30AHR-G	LVR-IC	LDO, 3.05V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AM	-	BU33TA2WNVX	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	SSON004X1216	110vm	VR4	9mc	Rhm
AM	-	RP104K281B5	LVR-IC	LDO, 2.85V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AM	-	XC6221A20B7R	LVR-IC	LDO, 2.05V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AM	-	XC6223C29B9R-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AM	-	XC6504A2917R-G	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AM	-	XC9244A27C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.7V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AM0	-	XC6501A31A7R-G	LVR-IC	LDO, 3.15V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AM0	-	XC6501A31AGR-G	LVR-IC	LDO, 3.15V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AM0	-	XC9260A30DER-G	DC-DC-IC	PWM step-down, 3.0V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AM01	-	RP131K081B	LVR-IC	LDO, 0.8V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM02	-	RP131K091B	LVR-IC	LDO, 0.9V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM03	-	RP131K101B	LVR-IC	LDO, 1.0V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM04	-	RP131K111B	LVR-IC	LDO, 1.1V±1%, 1A	DFN1820-6	74wf	VR4	9b	Ric
AM05	-	RP131K121B	LVR-IC	LDO, 1.2V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM06	-	RP131K121B5	LVR-IC	LDO, 1.25V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM07	-	RP131K131B	LVR-IC	LDO, 1.3V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM08	-	RP131K141B	LVR-IC	LDO, 1.4V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM09	-	RP131K151B	LVR-IC	LDO, 1.5V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM1	-	XC6501A32A7R-G	LVR-IC	LDO, 3.25V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AM1	-	XC6501A32AGR-G	LVR-IC	LDO, 3.25V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AM1	-	XC9260A31DER-G	DC-DC-IC	PWM step-down, 3.1V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AM10	-	RP131K161B	LVR-IC	LDO, 1.6V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM11	-	RP131K171B	LVR-IC	LDO, 1.7V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM12	-	RP131K181B	LVR-IC	LDO, 1.8V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM13	-	RP131K181B5	LVR-IC	LDO, 1.85V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM14	-	RP131K191B	LVR-IC	LDO, 1.9V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM15	-	RP131K201B	LVR-IC	LDO, 2.0V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM16	-	RP131K211B	LVR-IC	LDO, 2.1V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM17	-	RP131K221B	LVR-IC	LDO, 2.2V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM18	-	RP131K231B	LVR-IC	LDO, 2.3V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM19	-	RP131K241B	LVR-IC	LDO, 2.4V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM2	-	XC6501A33A7R-G	LVR-IC	LDO, 3.35V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AM2	-	XC6501A33AGR-G	LVR-IC	LDO, 3.35V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AM2	-	XC9260A32DER-G	DC-DC-IC	PWM step-down, 3.2V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AM20	-	RP131K251B	LVR-IC	LDO, 2.5V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM21	-	RP131K261B	LVR-IC	LDO, 2.6V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM22	-	RP131K271B	LVR-IC	LDO, 2.7V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM23	-	RP131K281B	LVR-IC	LDO, 2.8V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM24	-	RP131K281B5	LVR-IC	LDO, 2.85V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM25	-	RP131K291B	LVR-IC	LDO, 2.9V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM26	-	RP131K301B	LVR-IC	LDO, 3.0V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM27	-	RP131K311B	LVR-IC	LDO, 3.1V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM28	-	RP131K321B	LVR-IC	LDO, 3.2V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM29	-	RP131K331B	LVR-IC	LDO, 3.3V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM3	-	XC6501A34A7R-G	LVR-IC	LDO, 3.45V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AM3	-	XC6501A34AGR-G	LVR-IC	LDO, 3.45V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AM3	-	XC9260A33DER-G	DC-DC-IC	PWM step-down, 3.3V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AM30	-	RP131K341B	LVR-IC	LDO, 3.4V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM31	-	RP131K351B	LVR-IC	LDO, 3.5V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM32	-	RP131K361B	LVR-IC	LDO, 3.6V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM33	-	RP131K371B	LVR-IC	LDO, 3.7V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM34	-	RP131K381B	LVR-IC	LDO, 3.8V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM35	-	RP131K391B	LVR-IC	LDO, 3.9V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM36	-	RP131K401B	LVR-IC	LDO, 4.0V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM37	-	RP131K411B	LVR-IC	LDO, 4.1V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM38	-	RP131K421B	LVR-IC	LDO, 4.2V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM39	-	RP131K431B	LVR-IC	LDO, 4.3V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM4	-	XC6501A35A7R-G	LVR-IC	LDO, 3.55V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AM4	-	XC6501A35AGR-G	LVR-IC	LDO, 3.55V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AM4	-	XC9260A34DER-G	DC-DC-IC	PWM step-down, 3.4V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AM40	-	RP131K441B	LVR-IC	LDO, 4.4V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM41	-	RP131K451B	LVR-IC	LDO, 4.5V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM42	-	RP131K461B	LVR-IC	LDO, 4.6V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM43	-	RP131K471B	LVR-IC	LDO, 4.7V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM44	-	RP131K481B	LVR-IC	LDO, 4.8V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM45	-	RP131K491B	LVR-IC	LDO, 4.9V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM46	-	RP131K501B	LVR-IC	LDO, 5.0V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM47	-	RP131K101B5	LVR-IC	LDO, 1.05V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM48	-	RP131K551B	LVR-IC	LDO, 5.5V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM49	-	RP131K511B	LVR-IC	LDO, 5.1V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM5	-	XC6501A36A7R-G	LVR-IC	LDO, 3.65V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AM5	-	XC6501A36AGR-G	LVR-IC	LDO, 3.65V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AM5	-	XC9260A35DER-G	DC-DC-IC	PWM step-down, 3.5V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AM50	-	RP131K521B	LVR-IC	LDO, 5.2V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM51	-	RP131K531B	LVR-IC	LDO, 5.3V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM52	-	RP131K541B	LVR-IC	LDO, 5.4V±1%, 1A, +CE	DFN1820-6	74wf	VR4	9b	Ric
AM6	-	XC6501A37A7R-G	LVR-IC	LDO, 3.75V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AM6	-	XC6501A37AGR-G	LVR-IC	LDO, 3.75V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AM6	-	XC9260A36DER-G	DC-DC-IC	PWM step-down, 3.6V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AM7	-	XC6501A38A7R-G	LVR-IC	LDO, 3.85V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AM7	-	XC6501A38AGR-G	LVR-IC	LDO, 3.85V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AM8	-	XC6501A39A7R-G	LVR-IC	LDO, 3.95V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AM8	-	XC6501A39AGR-G	LVR-IC	LDO, 3.95V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AM9	-	XC6501A40A7R-G	LVR-IC	LDO, 4.05V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AM9	-	XC6501A40AGR-G	LVR-IC	LDO, 4.05V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AMA	-	TC1302AMAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMA	-	XC6501A41A7R-G	LVR-IC	LDO, 4.15V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AMA	-	XC6501A41AGR-G	LVR-IC	LDO, 4.15V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AMA	-	XC9260A3ADER-G	DC-DC-IC	PWM step-down, 3.05V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AMAA	-	TC1301AMAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMAB	-	TC1301AMABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMAC	-	TC1301AMACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMAD	-	TC1301AMADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMAE	-	TC1301AMAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMAF	-	TC1301AMAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMB	-	TC1302AMBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMB	-	XC6501A42A7R-G	LVR-IC	LDO, 4.25V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AMB	-	XC6501A42AGR-G	LVR-IC	LDO, 4.25V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AMB	-	XC9260A3BDER-G	DC-DC-IC	PWM step-down, 3.15V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AMBA	-	TC1301AMBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMBB	-	TC1301AMBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMBC	-	TC1301AMBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMBD	-	TC1301AMBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMBE	-	TC1301AMBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMBF	-	TC1301AMBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMC	-	TC1302AMCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMC	-	XC6501A43A7R-G	LVR-IC	LDO, 4.35V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AMC	-	XC6501A43AGR-G	LVR-IC	LDO, 4.35V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AMC	-	XC9260A3CDER-G	DC-DC-IC	PWM step-down, 3.25V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AMCA	-	TC1301AMCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMCB	-	TC1301AMCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMCC	-	TC1301AMCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMCD	-	TC1301AMCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMCE	-	TC1301AMCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMCF	-	TC1301AMCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMD	-	TC1302AMDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMD	-	XC6501A44A7R-G	LVR-IC	LDO, 4.45V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AMD	-	XC6501A44AGR-G	LVR-IC	LDO, 4.45V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AMD	-	XC9260A3DDER-G	DC-DC-IC	PWM step-down, 3.35V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AMDA	-	TC1301AMDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMDB	-	TC1301AMDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMDC	-	TC1301AMDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMDD	-	TC1301AMDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMDE	-	TC1301AMDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMDF	-	TC1301AMDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AME	-	TC1302AMEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AME	-	XC6501A45A7R-G	LVR-IC	LDO, 4.55V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AME	-	XC6501A45AGR-G	LVR-IC	LDO, 4.55V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AME	-	XC9260A3EDER-G	DC-DC-IC	PWM step-down, 3.45V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AMEA	-	TC1301AMEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMEB	-	TC1301AMEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMEC	-	TC1301AMECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMED	-	TC1301AMEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMEE	-	TC1301AMEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMEF	-	TC1301AMEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMF	-	MIC5320-2.8/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
AMF	-	TC1302AMFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMF	-	XC6501A46A7R-G	LVR-IC	LDO, 4.65V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AMF	-	XC6501A46AGR-G	LVR-IC	LDO, 4.65V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AMF	-	XC9260A3FDER-G	DC-DC-IC	PWM step-down, 3.55V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AMF	mb	MIC5320-2.8/1.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±2%, 150mA, +CE	MLF-6	74g0	VR19	9i	Mcr
AMFA	-	TC1301AMFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMFB	-	TC1301AMFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMFC	-	TC1301AMFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMFD	-	TC1301AMFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMFE	-	TC1301AMFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMFF	-	TC1301AMFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMG	-	MIC5320-2.8/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
AMG	-	TC1302AMGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMG	mb	MIC5320-2.8/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9i	Mcr
AMGA	-	TC1301AMGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMGB	-	TC1301AMGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMGC	-	TC1301AMGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMGD	-	TC1301AMGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMGE	-	TC1301AMGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMGF	-	TC1301AMGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMH	-	TC1302AMHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMH	-	XC6501A47A7R-G	LVR-IC	LDO, 4.75V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AMH	-	XC6501A47AGR-G	LVR-IC	LDO, 4.75V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AMHA	-	TC1301AMHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMHB	-	TC1301AMHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMHC	-	TC1301AMHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMHD	-	TC1301AMHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMHE	-	TC1301AMHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMHF	-	TC1301AMHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMI	-	TC1302AMIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMIA	-	TC1301AMIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMIB	-	TC1301AMIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMIC	-	TC1301AMICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMID	-	TC1301AMIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMIE	-	TC1301AMIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMIF	-	TC1301AMIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMJ	-	TC1302AMJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMJA	-	TC1301AMJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMJB	-	TC1301AMJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMJC	-	TC1301AMJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMJD	-	TC1301AMJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMJE	-	TC1301AMJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMJF	-	TC1301AMJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMK	-	MIC5320-2.8/2.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.6V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
AMK	-	TC1302AMKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMK	-	XC6501A48A7R-G	LVR-IC	LDO, 4.85V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AMK	-	XC6501A48AGR-G	LVR-IC	LDO, 4.85V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AMKA	-	TC1301AMKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMKB	-	TC1301AMKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMKC	-	TC1301AMKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMKD	-	TC1301AMKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMKE	-	TC1301AMKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMKF	-	TC1301AMKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AML	-	TC1302AMLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AML	-	XC6501A49A7R-G	LVR-IC	LDO, 4.95V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AML	-	XC6501A49AGR-G	LVR-IC	LDO, 4.95V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AMLA	-	TC1301AMLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMLB	-	TC1301AMLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMLC	-	TC1301AMLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMLD	-	TC1301AMLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMLE	-	TC1301AMLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMLF	-	TC1301AMLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AMM	-	MIC5320-2.8/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
AMM	-	TC1302AMMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMM	mb	MIC5320-2.8/2.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9i	Mcr
AMMA	-	TC1301AMMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMMB	-	TC1301AMMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMMC	-	TC1301AMMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMMD	-	TC1301AMMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMME	-	TC1301AMMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMMF	-	TC1301AMMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMN	-	TC1302AMNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMNA	-	TC1301AMNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMNB	-	TC1301AMNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMNC	-	TC1301AMNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMND	-	TC1301AMNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMNE	-	TC1301AMNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMNF	-	TC1301AMNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMO	-	TC1302AMOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMOA	-	TC1301AMOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMOB	-	TC1301AMOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMOC	-	TC1301AMOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMOD	-	TC1301AMODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMOE	-	TC1301AMOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMOF	-	TC1301AMOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMP	-	TC1302AMPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMPA	-	TC1301AMPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMPB	-	TC1301AMPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMPC	-	TC1301AMPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMPD	-	TC1301AMPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMPE	-	TC1301AMPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMPF	-	TC1301AMPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMQ	-	TC1302AMQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMQA	-	TC1301AMQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMQB	-	TC1301AMQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMQC	-	TC1301AMQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMQD	-	TC1301AMQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMQE	-	TC1301AMQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMQF	-	TC1301AMQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMR	-	TC1302AMRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMRA	-	TC1301AMRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMRB	-	TC1301AMRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMRC	-	TC1301AMRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMRD	-	TC1301AMRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMRE	-	TC1301AMREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMRF	-	TC1301AMRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMS	-	TC1302AMSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMSA	-	TC1301AMSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMSB	-	TC1301AMSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMSC	-	TC1301AMSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMSD	-	TC1301AMSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMSE	-	TC1301AMSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMSF	-	TC1301AMSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMT	-	TC1302AMTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMTA	-	TC1301AMTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMTB	-	TC1301AMTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMTC	-	TC1301AMTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMTD	-	TC1301AMTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMTE	-	TC1301AMTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMTF	-	TC1301AMTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMU	-	TC1302AMUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMUA	-	TC1301AMUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMUB	-	TC1301AMUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMUC	-	TC1301AMUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMUD	-	TC1301AMUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMUE	-	TC1301AMUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMUF	-	TC1301AMUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMV	-	TC1302AMVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMVA	-	TC1301AMVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMVB	-	TC1301AMVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMVC	-	TC1301AMVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMVD	-	TC1301AMVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AMVE	-	TC1301AMVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMVF	-	TC1301AMVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMW	-	TC1302AMWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AMWA	-	TC1301AMWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMWB	-	TC1301AMWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMWC	-	TC1301AMWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMWD	-	TC1301AMWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMWE	-	TC1301AMWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AMWF	-	TC1301AMWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
aN	-	74AUP1G34GF	CMOS-Log	Noninverting buffer	SOT891	52	Log10	9z	Nxp
aN	-	74AUP1G34GM	CMOS-Log	Noninverting buffer	SOT886	57	Log10	9z	Nxp
AN	-	BU34TA2WNVX	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	SSON004X1216	110vm	VR4	9mc	Rhm
AN	-	RP104K291B	LVR-IC	LDO, 2.9V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AN	-	XC6221A21B7R	LVR-IC	LDO, 2.15V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AN	-	XC6223C30B9R-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AN	-	XC6504A3017R-G	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AN	-	XC9244A28C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.8V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AN0	-	XC6501B31A7R-G	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AN0	-	XC6501B31AGR-G	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AN01	-	RP131K081D	LVR-IC	LDO, 0.8V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN02	-	RP131K091D	LVR-IC	LDO, 0.9V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN03	-	RP131K101D	LVR-IC	LDO, 1.0V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN04	-	RP131K111D	LVR-IC	LDO, 1.1V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN05	-	RP131K121D	LVR-IC	LDO, 1.2V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN06	-	RP131K121D5	LVR-IC	LDO, 1.25V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN07	-	RP131K131D	LVR-IC	LDO, 1.3V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN08	-	RP131K141D	LVR-IC	LDO, 1.4V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN09	-	RP131K151D	LVR-IC	LDO, 1.5V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN1	-	XC6501B32A7R-G	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AN1	-	XC6501B32AGR-G	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AN10	-	RP131K161D	LVR-IC	LDO, 1.6V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN11	-	RP131K171D	LVR-IC	LDO, 1.7V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN12	-	RP131K181D	LVR-IC	LDO, 1.8V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN13	-	RP131K181D5	LVR-IC	LDO, 1.85V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN14	-	RP131K191D	LVR-IC	LDO, 1.9V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN15	-	RP131K201D	LVR-IC	LDO, 2.0V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN16	-	RP131K211D	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN17	-	RP131K221D	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN18	-	RP131K231D	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN19	-	RP131K241D	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN2	-	XC6501B33A7R-G	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AN2	-	XC6501B33AGR-G	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AN20	-	RP131K251D	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN21	-	RP131K261D	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN22	-	RP131K271D	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN23	-	RP131K281D	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN24	-	RP131K281D5	LVR-IC	LDO, 2.85V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN25	-	RP131K291D	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN26	-	RP131K301D	LVR-IC	LDO, 3.0V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN27	-	RP131K311D	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN28	-	RP131K321D	LVR-IC	LDO, 3.2V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN29	-	RP131K331D	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN3	-	XC6501B34A7R-G	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AN3	-	XC6501B34AGR-G	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AN30	-	RP131K341D	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN31	-	RP131K351D	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN32	-	RP131K361D	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN33	-	RP131K371D	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN34	-	RP131K381D	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN35	-	RP131K391D	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN36	-	RP131K401D	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN37	-	RP131K411D	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN38	-	RP131K421D	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN39	-	RP131K431D	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN4	-	XC6501B35A7R-G	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AN4	-	XC6501B35AGR-G	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AN40	-	RP131K441D	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN41	-	RP131K451D	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN42	-	RP131K461D	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN43	-	RP131K471D	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AN44	-	RP131K481D	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN45	-	RP131K491D	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN46	-	RP131K501D	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN47	-	RP131K101D5	LVR-IC	LDO, 1.05V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN48	-	RP131K551D	LVR-IC	LDO, 5.5V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN49	-	RP131K511D	LVR-IC	LDO, 5.1V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN5	-	XC6501B36A7R-G	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AN5	-	XC6501B36AGR-G	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AN50	-	RP131K521D	LVR-IC	LDO, 5.2V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN51	-	RP131K531D	LVR-IC	LDO, 5.3V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN52	-	RP131K541D	LVR-IC	LDO, 5.4V±1%, 1A, +CE, CL	DFN1820-6	74wf	VR4	9b	Ric
AN6	-	XC6501B37A7R-G	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AN6	-	XC6501B37AGR-G	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AN7	-	XC6501B38A7R-G	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AN7	-	XC6501B38AGR-G	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AN8	-	XC6501B39A7R-G	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AN8	-	XC6501B39AGR-G	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AN8	-	XC9261A08CER-G	DC-DC-IC	PWM/PFM step-down, 0.8V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AN9	-	XC6501B40A7R-G	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AN9	-	XC6501B40AGR-G	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AN9	-	XC9261A09CER-G	DC-DC-IC	PWM/PFM step-down, 0.9V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ANA	-	TC1302ANAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANA	-	XC6501B41A7R-G	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ANA	-	XC6501B41AGR-G	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ANAA	-	TC1301ANAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANAB	-	TC1301ANABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANAC	-	TC1301ANACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANAD	-	TC1301ANADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANAE	-	TC1301ANAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANAF	-	TC1301ANAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANB	-	TC1302ANBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANB	-	XC6501B42A7R-G	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ANB	-	XC6501B42AGR-G	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ANBA	-	TC1301ANBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANBB	-	TC1301ANBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANBC	-	TC1301ANBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANBD	-	TC1301ANBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANBE	-	TC1301ANBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANBF	-	TC1301ANBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANC	-	TC1302ANCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANC	-	XC6501B43A7R-G	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ANC	-	XC6501B43AGR-G	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ANCA	-	TC1301ANCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANCB	-	TC1301ANCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANCC	-	TC1301ANCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANCD	-	TC1301ANCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANCE	-	TC1301ANCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANCF	-	TC1301ANCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AND	-	MIC5320-2.85/1.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.85V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
AND	-	TC1302ANDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AND	-	XC6501B44A7R-G	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AND	-	XC6501B44AGR-G	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ANDA	-	TC1301ANDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANDB	-	TC1301ANDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANDC	-	TC1301ANDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANDD	-	TC1301ANDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANDE	-	TC1301ANDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANDF	-	TC1301ANDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANE	-	TC1302ANEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANE	-	XC6501B45A7R-G	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ANE	-	XC6501B45AGR-G	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ANEA	-	TC1301ANEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANEB	-	TC1301ANEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANEC	-	TC1301ANECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANED	-	TC1301ANEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANEE	-	TC1301ANEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANEF	-	TC1301ANEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANF	-	TC1302ANFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANF	-	XC6501B46A7R-G	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ANF	-	XC6501B46AGR-G	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ANFA	-	TC1301ANFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANFB	-	TC1301ANFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANFC	-	TC1301ANFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANFD	-	TC1301ANFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANFE	-	TC1301ANFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANFF	-	TC1301ANFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANG	-	TC1302ANGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANGA	-	TC1301ANGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANGB	-	TC1301ANGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANGC	-	TC1301ANGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANGD	-	TC1301ANGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANGE	-	TC1301ANGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANGF	-	TC1301ANGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANH	-	TC1302ANHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANH	-	XC6501B47A7R-G	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ANH	-	XC6501B47AGR-G	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ANHA	-	TC1301ANHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANHB	-	TC1301ANHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANHC	-	TC1301ANHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANHD	-	TC1301ANHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANHE	-	TC1301ANHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANHF	-	TC1301ANHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANI	-	TC1302ANIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANIA	-	TC1301ANIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANIB	-	TC1301ANIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANIC	-	TC1301ANICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANID	-	TC1301ANIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANIE	-	TC1301ANIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANIF	-	TC1301ANIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANJ	-	TC1302ANJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANJA	-	TC1301ANJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANJB	-	TC1301ANJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANJC	-	TC1301ANJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANJD	-	TC1301ANJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANJE	-	TC1301ANJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANJF	-	TC1301ANJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANK	-	MIC5320-2.85/2.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.6V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
ANK	-	TC1302ANKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANK	-	XC6501B48A7R-G	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ANK	-	XC6501B48AGR-G	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ANKA	-	TC1301ANKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANKB	-	TC1301ANKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANKC	-	TC1301ANKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANKD	-	TC1301ANKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANKE	-	TC1301ANKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANKF	-	TC1301ANKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANL	-	TC1302ANLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANL	-	XC6501B49A7R-G	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
ANL	-	XC6501B49AGR-G	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
ANL	-	XC9261A0LCER-G	DC-DC-IC	PWM/PFM step-down, 0.85V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ANLA	-	TC1301ANLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANLB	-	TC1301ANLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANLC	-	TC1301ANLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANLD	-	TC1301ANLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANLE	-	TC1301ANLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANLF	-	TC1301ANLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANM	-	TC1302ANMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANM	-	XC9261A0MCER-G	DC-DC-IC	PWM/PFM step-down, 0.95V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ANMA	-	TC1301ANMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANMB	-	TC1301ANMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANMC	-	TC1301ANMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANMD	-	TC1301ANMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANME	-	TC1301ANMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANMF	-	TC1301ANMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANN	-	MIC5320-2.85/2.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.85V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
ANN	-	TC1302ANNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANNA	-	TC1301ANNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANNB	-	TC1301ANNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANNC	-	TC1301ANNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANND	-	TC1301ANNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ANNE	-	TC1301ANNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANNF	-	TC1301ANNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANO	-	TC1302ANOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANOA	-	TC1301ANOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANOB	-	TC1301ANOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANOC	-	TC1301ANOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANOD	-	TC1301ANODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANOE	-	TC1301ANOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANOF	-	TC1301ANOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANP	-	TC1302ANPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANPA	-	TC1301ANPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANPB	-	TC1301ANPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANPC	-	TC1301ANPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANPD	-	TC1301ANPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANPE	-	TC1301ANPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANPF	-	TC1301ANPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANQ	-	TC1302ANQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANQA	-	TC1301ANQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANQB	-	TC1301ANQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANQC	-	TC1301ANQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANQD	-	TC1301ANQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANQE	-	TC1301ANQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANQF	-	TC1301ANQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANR	-	TC1302ANRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANRA	-	TC1301ANRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANRB	-	TC1301ANRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANRC	-	TC1301ANRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANRD	-	TC1301ANRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANRE	-	TC1301ANREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANRF	-	TC1301ANRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANS	-	TC1302ANSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANSA	-	TC1301ANSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANSB	-	TC1301ANSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANSC	-	TC1301ANSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANSD	-	TC1301ANSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANSE	-	TC1301ANSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANSF	-	TC1301ANSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANT	-	TC1302ANTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANTA	-	TC1301ANTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANTB	-	TC1301ANTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANTC	-	TC1301ANTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANTD	-	TC1301ANTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANTE	-	TC1301ANTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANTF	-	TC1301ANTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANU	-	TC1302ANUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANUA	-	TC1301ANUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANUB	-	TC1301ANUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANUC	-	TC1301ANUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANUD	-	TC1301ANUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANUE	-	TC1301ANUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANUF	-	TC1301ANUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANV	-	TC1302ANVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANVA	-	TC1301ANVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANVB	-	TC1301ANVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANVC	-	TC1301ANVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANVD	-	TC1301ANVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANVE	-	TC1301ANVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANVF	-	TC1301ANVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANW	-	TC1302ANWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ANWA	-	TC1301ANWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANWB	-	TC1301ANWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANWC	-	TC1301ANWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANWD	-	TC1301ANWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANWE	-	TC1301ANWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ANWF	-	TC1301ANWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOA	-	TC1302AOAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOAA	-	TC1301AOAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOAB	-	TC1301AOABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOAC	-	TC1301AOACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOAD	-	TC1301AOADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AOAE	-	TC1301AOAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOAF	-	TC1301AOAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOB	-	TC1302AOBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOBA	-	TC1301AOBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOBB	-	TC1301AOBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOBC	-	TC1301AOBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOBD	-	TC1301AOBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOBE	-	TC1301AOBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOBF	-	TC1301AOBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOC	-	TC1302AOCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOCA	-	TC1301AOCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOCB	-	TC1301AOCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOCC	-	TC1301AOCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOCD	-	TC1301AOCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOCE	-	TC1301AOCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOCF	-	TC1301AOCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOD	-	TC1302AODVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AODA	-	TC1301AODAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AODB	-	TC1301AODBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AODC	-	TC1301AODCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AODD	-	TC1301AODDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AODE	-	TC1301AODEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AODF	-	TC1301AODFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOE	-	TC1302AOEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOEA	-	TC1301AOEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOEB	-	TC1301AOEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOEC	-	TC1301AOECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOED	-	TC1301AOEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOEE	-	TC1301AOEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOEF	-	TC1301AOEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOF	-	MIC5320-2.9/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/1.5V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
AOF	-	TC1302AOFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOFA	-	TC1301AOFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOFB	-	TC1301AOFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOFC	-	TC1301AOFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOFD	-	TC1301AOFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOFE	-	TC1301AOFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOFF	-	TC1301AOFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOG	-	MIC5320-2.9/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/1.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
AOG	-	TC1302AOGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOGA	-	TC1301AOGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOGB	-	TC1301AOGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOGC	-	TC1301AOGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOGD	-	TC1301AOGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOGE	-	TC1301AOGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOGF	-	TC1301AOGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOH	-	TC1302AOHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOHA	-	TC1301AOHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOHB	-	TC1301AOHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOHC	-	TC1301AOHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOHD	-	TC1301AOHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOHE	-	TC1301AOHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOHF	-	TC1301AOHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOI	-	TC1302AOIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOIA	-	TC1301AOIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOIB	-	TC1301AOIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOIC	-	TC1301AOICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOID	-	TC1301AOIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOIE	-	TC1301AOIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOIF	-	TC1301AOIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOJ	-	TC1302AOJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOJA	-	TC1301AOJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOJB	-	TC1301AOJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOJC	-	TC1301AOJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOJD	-	TC1301AOJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOJE	-	TC1301AOJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOJF	-	TC1301AOJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOK	-	TC1302AOKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOKA	-	TC1301AOKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOKB	-	TC1301AOKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AOKC	-	TC1301AOKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOKD	-	TC1301AOKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOKE	-	TC1301AOKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOKF	-	TC1301AOKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOL	-	TC1302AOLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOLA	-	TC1301AOLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOLB	-	TC1301AOLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOLC	-	TC1301AOLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOLD	-	TC1301AOLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOLE	-	TC1301AOLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOLF	-	TC1301AOLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOM	-	TC1302AOMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOMA	-	TC1301AOMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOMB	-	TC1301AOMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOMC	-	TC1301AOMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOMD	-	TC1301AOMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOME	-	TC1301AOMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOMF	-	TC1301AOMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AON	-	TC1302AONVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AONA	-	TC1301AONAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AONB	-	TC1301AONBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AONC	-	TC1301AONCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOND	-	TC1301AONDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AONE	-	TC1301AONEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AONF	-	TC1301AONFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOO	-	MIC5320-2.9/2.9YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/2.9V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
AOO	-	TC1302AOOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOOA	-	TC1301AOOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOOB	-	TC1301AOOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOOC	-	TC1301AOOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOOD	-	TC1301AOODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOOE	-	TC1301AOOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOOF	-	TC1301AOOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOP	-	TC1302AOPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOPA	-	TC1301AOPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOPB	-	TC1301AOPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOPC	-	TC1301AOPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOPD	-	TC1301AOPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOPE	-	TC1301AOPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOPF	-	TC1301AOPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOQ	-	TC1302AOQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOQA	-	TC1301AOQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOQB	-	TC1301AOQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOQC	-	TC1301AOQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOQD	-	TC1301AOQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOQE	-	TC1301AOQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOQF	-	TC1301AOQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOR	-	TC1302AORVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AORA	-	TC1301AORAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AORB	-	TC1301AORBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AORC	-	TC1301AORCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AORD	-	TC1301AORDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AORE	-	TC1301AOREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AORF	-	TC1301AORFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOS	-	TC1302AOSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOSA	-	TC1301AOSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOSB	-	TC1301AOSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOSC	-	TC1301AOSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOSD	-	TC1301AOSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOSE	-	TC1301AOSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOSF	-	TC1301AOSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOT	-	TC1302AOTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOTA	-	TC1301AOTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOTB	-	TC1301AOTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOTC	-	TC1301AOTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOTD	-	TC1301AOTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOTE	-	TC1301AOTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOTF	-	TC1301AOTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOTI	-	TPA6135A2RT	Lin-IC	AF PA, 1.8..4.5V, 2x25mW(3V/16Ω), enable	QFN-16	38	-	9a	Ti
AOU	-	TC1302AOUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AOUA	-	TC1301AOUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOUB	-	TC1301AOUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOUC	-	TC1301AOUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOUD	-	TC1301AOUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOUE	-	TC1301AOUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOUF	-	TC1301AOUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOV	-	TC1302AOVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOVA	-	TC1301AOVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOVB	-	TC1301AOVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOVC	-	TC1301AOVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOVD	-	TC1301AOVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOVE	-	TC1301AOVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOVF	-	TC1301AOVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOW	-	TC1302AOWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AOWA	-	TC1301AOWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOWB	-	TC1301AOWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOWC	-	TC1301AOWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOWD	-	TC1301AOWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOWE	-	TC1301AOWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOWF	-	TC1301AOWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AOWI	-	TPA6136A2YFF	Lin-IC	AF PA, 1.8..4.5V, 2x25mW(3V/16Ω), shutdown	BGA-16	39	-	9a	Ti
aP	-	74AUP1G157GF	CMOS-Log	2-input multiplexer	SOT891	52	Log42	9z	Nxp
aP	-	74AUP1G157GM	CMOS-Log	2-input multiplexer	SOT886	57	Log42	9z	Nxp
AP	-	LD6805K/12P	LVR-IC	LDO, 1.2V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
AP	-	RP104K301B	LVR-IC	LDO, 3.0V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AP	-	XC6221A22B7R	LVR-IC	LDO, 2.25V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AP	-	XC6223C31B9R-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AP	-	XC9244A29C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.9V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AP0	-	XC6501P311HR-G	LVR-IC	LDO, 3.1V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AP0	-	XC9261A10CER-G	DC-DC-IC	PWM/PFM step-down, 1.0V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AP01	-	R5324K001A	LVR-IC	LDO, Triple out, V1/V2/V3=2.8V/2.8V/2.8V±1%, 200mA, +CE, CL	DFN2527-10	37	VR21	9b	Ric
AP02	-	R5324K001B	LVR-IC	LDO, Triple out, V1/V2/V3=2.8V/2.8V/2.8V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP03	-	R5324K002A	LVR-IC	LDO, Triple out, V1/V2/V3=2.9V/2.9V/2.9V±1%, 200mA, +CE, CL	DFN2527-10	37	VR21	9b	Ric
AP04	-	R5324K002B	LVR-IC	LDO, Triple out, V1/V2/V3=2.9V/2.9V/2.9V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP05	-	R5324K003A	LVR-IC	LDO, Triple out, V1/V2/V3=3.0V/3.0V/3.0V±1%, 200mA, +CE, CL	DFN2527-10	37	VR21	9b	Ric
AP06	-	R5324K003B	LVR-IC	LDO, Triple out, V1/V2/V3=3.0V/3.0V/3.0V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP07	-	R5324K004A	LVR-IC	LDO, Triple out, V1/V2/V3=3.3V/3.0V/2.5V±1%, 200mA, +CE, CL	DFN2527-10	37	VR21	9b	Ric
AP08	-	R5324K004B	LVR-IC	LDO, Triple out, V1/V2/V3=3.3V/3.0V/2.5V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP09	-	R5324K005B	LVR-IC	LDO, Triple out, V1/V2/V3=1.5V/2.9V/1.5V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP1	-	XC6501P321HR-G	LVR-IC	LDO, 3.2V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AP1	-	XC9261A11CER-G	DC-DC-IC	PWM/PFM step-down, 1.1V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AP10	-	R5324K006B	LVR-IC	LDO, Triple out, V1/V2/V3=2.8V/2.8V/2.9V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP11	-	R5324K007B	LVR-IC	LDO, Triple out, V1/V2/V3=3.3V/2.5V/1.8V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP12	-	R5324K008B	LVR-IC	LDO, Triple out, V1/V2/V3=3.3V/2.8V/2.7V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP13	-	R5324K009B	LVR-IC	LDO, Triple out, V1/V2/V3=3.1V/2.8V/1.8V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP14	-	R5324K010B	LVR-IC	LDO, Triple out, V1/V2/V3=1.8V/3.1V/3.1V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP15	-	R5324K011B	LVR-IC	LDO, Triple out, V1/V2/V3=3.0V/2.5V/1.8V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP16	-	R5324K012B	LVR-IC	LDO, Triple out, V1/V2/V3=3.3V/3.0V/1.8V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP17	-	R5324K013B	LVR-IC	LDO, Triple out, V1/V2/V3=3.0V/1.8V/1.8V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP18	-	R5324K014B	LVR-IC	LDO, Triple out, V1/V2/V3=3.3V/3.0V/3.5V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP19	-	R5324K015B	LVR-IC	LDO, Triple out, V1/V2/V3=3.3V/1.8V/1.8V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP2	-	XC6501P331HR-G	LVR-IC	LDO, 3.3V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AP2	-	XC9261A12CER-G	DC-DC-IC	PWM/PFM step-down, 1.2V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AP20	-	R5324K016B	LVR-IC	LDO, Triple out, V1/V2/V3=3.0V/2.8V/1.8V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP21	-	R5324K017B	LVR-IC	LDO, Triple out, V1/V2/V3=2.9V/1.5V/2.9V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP22	-	R5324K018B	LVR-IC	LDO, Triple out, V1/V2/V3=3.3V/3.3V/3.3V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP23	-	R5324K019B	LVR-IC	LDO, Triple out, V1/V2/V3=1.5V/1.85V/2.85V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP24	-	R5324K020B	LVR-IC	LDO, Triple out, V1/V2/V3=3.0V/2.8V/1.5V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP25	-	R5324K021B	LVR-IC	LDO, Triple out, V1/V2/V3=2.5V/3.0V/3.3V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP26	-	R5324K022B	LVR-IC	LDO, Triple out, V1/V2/V3=1.8V/2.5V/2.8V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP27	-	R5324K023B	LVR-IC	LDO, Triple out, V1/V2/V3=2.8V/1.8V/1.8V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP28	-	R5324K024B	LVR-IC	LDO, Triple out, V1/V2/V3=2.8V/1.8V/2.85V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP29	-	R5324K025B	LVR-IC	LDO, Triple out, V1/V2/V3=2.8V/2.6V/1.8V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP3	-	XC6501P341HR-G	LVR-IC	LDO, 3.4V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AP3	-	XC9261A13CER-G	DC-DC-IC	PWM/PFM step-down, 1.3V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AP30	-	R5324K026B	LVR-IC	LDO, Triple out, V1/V2/V3=2.8V/2.8V1.8V±1%, 200mA, +CE	DFN2527-10	37	VR21	9b	Ric
AP4	-	XC6501P351HR-G	LVR-IC	LDO, 3.5V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AP4	-	XC9261A14CER-G	DC-DC-IC	PWM/PFM step-down, 1.4V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AP5	-	XC6501P361HR-G	LVR-IC	LDO, 3.6V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AP5	-	XC9261A15CER-G	DC-DC-IC	PWM/PFM step-down, 1.5V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AP6	-	XC6501P371HR-G	LVR-IC	LDO, 3.7V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AP6	-	XC9261A16CER-G	DC-DC-IC	PWM/PFM step-down, 1.6V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AP7	-	XC6501P381HR-G	LVR-IC	LDO, 3.8V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AP7	-	XC9261A17CER-G	DC-DC-IC	PWM/PFM step-down, 1.7V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AP8	-	XC6501P391HR-G	LVR-IC	LDO, 3.9V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AP8	-	XC9261A18CER-G	DC-DC-IC	PWM/PFM step-down, 1.8V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AP9	-	XC6501P401HR-G	LVR-IC	LDO, 4.0V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AP9	-	XC9261A19CER-G	DC-DC-IC	PWM/PFM step-down, 1.9V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
APA	-	TC1302APAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APA	-	XC6501P411HR-G	LVR-IC	LDO, 4.1V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
APA	-	XC9261A1ACER-G	DC-DC-IC	PWM/PFM step-down, 1.05V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
APAA	-	TC1301APAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APAB	-	TC1301APABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APAC	-	TC1301APACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APAD	-	TC1301APADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APAE	-	TC1301APAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APAF	-	TC1301APAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APB	-	TC1302APBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APB	-	XC6501P421HR-G	LVR-IC	LDO, 4.2V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
APB	-	XC9261A1BCER-G	DC-DC-IC	PWM/PFM step-down, 1.15V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
APBA	-	TC1301APBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APBB	-	TC1301APBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APBC	-	TC1301APBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APBD	-	TC1301APBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APBE	-	TC1301APBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APBF	-	TC1301APBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APC	-	TC1302APCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APC	-	XC6501P431HR-G	LVR-IC	LDO, 4.3V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
APC	-	XC9261A1CCER-G	DC-DC-IC	PWM/PFM step-down, 1.25V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
APCA	-	TC1301APCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APCB	-	TC1301APCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APCC	-	TC1301APCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APCD	-	TC1301APCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APCE	-	TC1301APCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APCF	-	TC1301APCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APD	-	TC1302APDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APD	-	XC6501P441HR-G	LVR-IC	LDO, 4.4V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
APD	-	XC9261A1DCER-G	DC-DC-IC	PWM/PFM step-down, 1.35VV±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
APDA	-	TC1301APDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APDB	-	TC1301APDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APDC	-	TC1301APDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APDD	-	TC1301APDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APDE	-	TC1301APDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APDF	-	TC1301APDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APE	-	TC1302APEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APE	-	XC6501P451HR-G	LVR-IC	LDO, 4.5V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
APE	-	XC9261A1ECER-G	DC-DC-IC	PWM/PFM step-down, 1.45V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
APEA	-	TC1301APEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APEB	-	TC1301APEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APEC	-	TC1301APECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APED	-	TC1301APEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APEE	-	TC1301APEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APEF	-	TC1301APEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APF	-	TC1302APFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APF	-	XC6501P461HR-G	LVR-IC	LDO, 4.6V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
APF	-	XC9261A1FCER-G	DC-DC-IC	PWM/PFM step-down, 1.55V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
APFA	-	TC1301APFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APFB	-	TC1301APFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APFC	-	TC1301APFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APFD	-	TC1301APFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APFE	-	TC1301APFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APFF	-	TC1301APFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APG	-	MIC5320-3.0/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
APG	-	TC1302APGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APGA	-	TC1301APGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APGB	-	TC1301APGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APGC	-	TC1301APGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APGD	-	TC1301APGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APGE	-	TC1301APGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APGF	-	TC1301APGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
APH	-	TC1302APHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APH	-	XC6501P471HR-G	LVR-IC	LDO, 4.7V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
APH	-	XC9261A1HCER-G	DC-DC-IC	PWM/PFM step-down, 1.65V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
APHA	-	TC1301APHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APHB	-	TC1301APHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APHC	-	TC1301APHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APHD	-	TC1301APHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APHE	-	TC1301APHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APHF	-	TC1301APHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
API	-	TC1302APIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APIA	-	TC1301APIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APIB	-	TC1301APIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APIC	-	TC1301APICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APID	-	TC1301APIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APIE	-	TC1301APIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APIF	-	TC1301APIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APJ	-	MIC5320-3.0/2.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.5V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
APJ	-	TC1302APJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APJ	mb	MIC5320-3.0/2.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.5V±2%, 150mA, +CE	MLF-6	74g0	VR19	9i	Mcr
APJA	-	TC1301APJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APJB	-	TC1301APJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APJC	-	TC1301APJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APJD	-	TC1301APJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APJE	-	TC1301APJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APJF	-	TC1301APJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APK	-	MIC5320-3.0/2.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.6V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
APK	-	TC1302APKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APK	-	XC6501P481HR-G	LVR-IC	LDO, 4.8V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
APK	-	XC9261A1KCER-G	DC-DC-IC	PWM/PFM step-down, 1.75V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
APK	mb	MIC5320-3.0/2.6YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.6V±2%, 150mA, +CE	MLF-6	74g0	VR19	9i	Mcr
APKA	-	TC1301APKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APKB	-	TC1301APKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APKC	-	TC1301APKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APKD	-	TC1301APKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APKE	-	TC1301APKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APKF	-	TC1301APKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APL	-	TC1302APLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APL	-	XC6501P491HR-G	LVR-IC	LDO, 4.9V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
APL	-	XC9261A1LCER-G	DC-DC-IC	PWM/PFM step-down, 1.85V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
APLA	-	TC1301APLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APLB	-	TC1301APLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APLC	-	TC1301APLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APLD	-	TC1301APLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APLE	-	TC1301APLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APLF	-	TC1301APLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APM	-	MIC5320-3.0/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
APM	-	TC1302APMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APM	-	XC6501P501HR-G	LVR-IC	LDO, 5.0V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
APM	-	XC9261A1MCER-G	DC-DC-IC	PWM/PFM step-down, 1.95V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
APMA	-	TC1301APMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APMB	-	TC1301APMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APMC	-	TC1301APMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APMD	-	TC1301APMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APME	-	TC1301APMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APMF	-	TC1301APMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APN	-	MIC5320-3.0/2.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.85V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
APN	-	TC1302APNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APNA	-	TC1301APNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APNB	-	TC1301APNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APNC	-	TC1301APNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APND	-	TC1301APNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APNE	-	TC1301APNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APNF	-	TC1301APNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APO	-	MAX6471TA15BD3	LVR/Vdet-IC	LDO, 1.5V±1.3%, 300mA, -Reset PPO, Set, -MR	DFN-8	75	-	9m	Max
APO	-	TC1302APOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APOA	-	TC1301APOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APOB	-	TC1301APOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APOC	-	TC1301APOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APOD	-	TC1301APODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APOE	-	TC1301APOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
APOF	-	TC1301APOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APP	-	MAX6471TA25BD3	LVR/Vdet-IC	LDO, 2.5V±1.3%, 300mA, -Reset PPO, Set, -MR	DFN-8	75	-	9m	Max
APP	-	MIC5320-3.0/3.0YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
APP	-	TC1302APPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APP	mb	MIC5320-3.0/3.0YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 150mA, +CE	MLF-6	74g0	VR19	9i	Mcr
APPA	-	TC1301APPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APPB	-	TC1301APPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APPC	-	TC1301APPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APPD	-	TC1301APPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APPE	-	TC1301APPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APPF	-	TC1301APPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APQ	-	MAX6471TA28AD3	LVR/Vdet-IC	LDO, 2.8V±1.3%, 300mA, -Reset PPO, Set, -MR	DFN-8	75	-	9m	Max
APQ	-	TC1302APQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APQA	-	TC1301APQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APQB	-	TC1301APQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APQC	-	TC1301APQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APQD	-	TC1301APQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APQE	-	TC1301APQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APQF	-	TC1301APQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APR	-	MAX6471TA30BD3	LVR/Vdet-IC	LDO, 3.0V±1.3%, 300mA, -Reset PPO, Set, -MR	DFN-8	75	-	9m	Max
APR	-	TC1302APRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APRA	-	TC1301APRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APRB	-	TC1301APRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APRC	-	TC1301APRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APRD	-	TC1301APRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APRE	-	TC1301APREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APRF	-	TC1301APRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APS	-	MAX6471TA18AD3	LVR/Vdet-IC	LDO, 1.8V±1.3%, 300mA, -Reset PPO, Set, -MR	DFN-8	75	-	9m	Max
APS	-	TC1302APSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APSA	-	TC1301APSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APSB	-	TC1301APSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APSC	-	TC1301APSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APSD	-	TC1301APSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APSE	-	TC1301APSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APSF	-	TC1301APSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APT	-	MAX6471TA33AD3	LVR/Vdet-IC	LDO, 3.3V±1.3%, 300mA, -Reset PPO, Set, -MR	DFN-8	75	-	9m	Max
APT	-	TC1302APTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APTA	-	TC1301APTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APTB	-	TC1301APTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APTC	-	TC1301APTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APTD	-	TC1301APTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APTE	-	TC1301APTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APTF	-	TC1301APTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APU	-	TC1302APUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APUA	-	TC1301APUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APUB	-	TC1301APUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APUC	-	TC1301APUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APUD	-	TC1301APUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APUE	-	TC1301APUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APUF	-	TC1301APUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APV	-	TC1302APVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APVA	-	TC1301APVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APVB	-	TC1301APVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APVC	-	TC1301APVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APVD	-	TC1301APVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APVE	-	TC1301APVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APVF	-	TC1301APVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APW	-	TC1302APWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
APWA	-	TC1301APWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APWB	-	TC1301APWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APWC	-	TC1301APWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APWD	-	TC1301APWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APWE	-	TC1301APWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
APWF	-	TC1301APWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQ	-	RP104K321B	LVR-IC	LDO, 3.2V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AQA	-	TC1302AQAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQAA	-	TC1301AQAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQAB	-	TC1301AQABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQAC	-	TC1301AQACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQAD	-	TC1301AQADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AQAE	-	TC1301AQAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQAF	-	TC1301AQAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQB	-	TC1302AQBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQBA	-	TC1301AQBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQBB	-	TC1301AQBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQBC	-	TC1301AQBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQBD	-	TC1301AQBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQBE	-	TC1301AQBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQBF	-	TC1301AQBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQC	-	TC1302AQCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQCA	-	TC1301AQCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQCB	-	TC1301AQCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQCC	-	TC1301AQCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQCD	-	TC1301AQCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQCE	-	TC1301AQCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQCF	-	TC1301AQCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQD	-	TC1302AQDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQDA	-	TC1301AQDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQDB	-	TC1301AQDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQDC	-	TC1301AQDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQDD	-	TC1301AQDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQDE	-	TC1301AQDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQDF	-	TC1301AQDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQE	-	TC1302AQEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQEA	-	TC1301AQEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQEB	-	TC1301AQEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQEC	-	TC1301AQECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQED	-	TC1301AQEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQEE	-	TC1301AQEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQEF	-	TC1301AQEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQF	-	TC1302AQFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQFA	-	TC1301AQFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQFB	-	TC1301AQFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQFC	-	TC1301AQFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQFD	-	TC1301AQFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQFE	-	TC1301AQFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQFF	-	TC1301AQFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQG	-	TC1302AQGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQGA	-	TC1301AQGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQGB	-	TC1301AQGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQGC	-	TC1301AQGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQGD	-	TC1301AQGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQGE	-	TC1301AQGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQGF	-	TC1301AQGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQH	-	TC1302AQHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQHA	-	TC1301AQHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQHB	-	TC1301AQHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQHC	-	TC1301AQHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQHD	-	TC1301AQHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQHE	-	TC1301AQHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQHF	-	TC1301AQHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQI	-	TC1302AQIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQIA	-	TC1301AQIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQIB	-	TC1301AQIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQIC	-	TC1301AQICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQID	-	TC1301AQIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQIE	-	TC1301AQIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQIF	-	TC1301AQIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQJ	-	TC1302AQJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQJA	-	TC1301AQJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQJB	-	TC1301AQJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQJC	-	TC1301AQJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQJD	-	TC1301AQJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQJE	-	TC1301AQJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQJF	-	TC1301AQJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQK	-	TC1302AQKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQKA	-	TC1301AQKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQKB	-	TC1301AQKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQKC	-	TC1301AQKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQKD	-	TC1301AQKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AQKE	-	TC1301AQKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQKF	-	TC1301AQKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQL	-	TC1302AQLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQLA	-	TC1301AQLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQLB	-	TC1301AQLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQLC	-	TC1301AQLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQLD	-	TC1301AQLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQLE	-	TC1301AQLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQLF	-	TC1301AQLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQM	-	TC1302AQMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQMA	-	TC1301AQMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQMB	-	TC1301AQMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQMC	-	TC1301AQMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQMD	-	TC1301AQMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQME	-	TC1301AQMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQMF	-	TC1301AQMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQN	-	TC1302AQNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQNA	-	TC1301AQNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQNB	-	TC1301AQNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQNC	-	TC1301AQNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQND	-	TC1301AQNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQNE	-	TC1301AQNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQNF	-	TC1301AQNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQO	-	TC1302AQOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQOA	-	TC1301AQOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQOB	-	TC1301AQOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQOC	-	TC1301AQOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQOD	-	TC1301AQODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQOE	-	TC1301AQOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQOF	-	TC1301AQOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQP	-	TC1302AQPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQPA	-	TC1301AQPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQPB	-	TC1301AQPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQPC	-	TC1301AQPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQPD	-	TC1301AQPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQPE	-	TC1301AQPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQPF	-	TC1301AQPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQQ	-	TC1302AQQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQQA	-	TC1301AQQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQQB	-	TC1301AQQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQQC	-	TC1301AQQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQQD	-	TC1301AQQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQQE	-	TC1301AQQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQQF	-	TC1301AQQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQR	-	TC1302AQRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQRA	-	TC1301AQRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQRB	-	TC1301AQRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQRC	-	TC1301AQRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQRD	-	TC1301AQRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQRE	-	TC1301AQREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQRF	-	TC1301AQRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQS	-	TC1302AQSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQSA	-	TC1301AQSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQSB	-	TC1301AQSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQSC	-	TC1301AQSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQSD	-	TC1301AQSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQSE	-	TC1301AQSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQSF	-	TC1301AQSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQT	-	TC1302AQTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQTA	-	TC1301AQTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQTB	-	TC1301AQTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQTC	-	TC1301AQTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQTD	-	TC1301AQTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQTE	-	TC1301AQTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQTF	-	TC1301AQTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQU	-	TC1302AQUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQUA	-	TC1301AQUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQUB	-	TC1301AQUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQUC	-	TC1301AQUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQUD	-	TC1301AQUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AQUE	-	TC1301AQUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQUF	-	TC1301AQUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQV	-	TC1302AQVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQVA	-	TC1301AQVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQVB	-	TC1301AQVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQVC	-	TC1301AQVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQVD	-	TC1301AQVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQVE	-	TC1301AQVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQVF	-	TC1301AQVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQW	-	TC1302AQWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AQWA	-	TC1301AQWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQWB	-	TC1301AQWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQWC	-	TC1301AQWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQWD	-	TC1301AQWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQWE	-	TC1301AQWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AQWF	-	TC1301AQWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
aR	-	74AUP1T98GF	CMOS-Log	Configurable gate with voltage-level translator	SOT891	52	Log82	9z	Nxp
aR	-	74AUP1T98GM	CMOS-Log	Configurable gate with voltage-level translator	SOT886	57	Log82	9z	Nxp
AR	-	RP104K331B	LVR-IC	LDO, 3.3V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AR	-	XC6221A23B7R	LVR-IC	LDO, 2.35V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AR	-	XC6223C32B9R-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AR	-	XC6504A3217R-G	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AR	-	XC9244A30C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AR0	-	XC6501C31A7R-G	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AR0	-	XC6501C31AGR-G	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AR0	-	XC9261A20CER-G	DC-DC-IC	PWM/PFM step-down, 2.0V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AR1	-	XC6501C32A7R-G	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AR1	-	XC6501C32AGR-G	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AR1	-	XC9261A21CER-G	DC-DC-IC	PWM/PFM step-down, 2.1V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AR2	-	XC6501C33A7R-G	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AR2	-	XC6501C33AGR-G	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AR2	-	XC9261A22CER-G	DC-DC-IC	PWM/PFM step-down, 2.2V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AR3	-	XC6501C34A7R-G	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AR3	-	XC6501C34AGR-G	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AR3	-	XC9261A23CER-G	DC-DC-IC	PWM/PFM step-down, 2.3V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AR4	-	XC6501C35A7R-G	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AR4	-	XC6501C35AGR-G	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AR4	-	XC9261A24CER-G	DC-DC-IC	PWM/PFM step-down, 2.4V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AR5	-	XC6501C36A7R-G	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AR5	-	XC6501C36AGR-G	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AR5	-	XC9261A25CER-G	DC-DC-IC	PWM/PFM step-down, 2.5V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AR6	-	XC6501C37A7R-G	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AR6	-	XC6501C37AGR-G	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AR6	-	XC9261A26CER-G	DC-DC-IC	PWM/PFM step-down, 2.6V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AR7	-	XC6501C38A7R-G	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AR7	-	XC6501C38AGR-G	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AR7	-	XC9261A27CER-G	DC-DC-IC	PWM/PFM step-down, 2.7V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AR8	-	XC6501C39A7R-G	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AR8	-	XC6501C39AGR-G	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AR8	-	XC9261A28CER-G	DC-DC-IC	PWM/PFM step-down, 2.8V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AR9	-	XC6501C40A7R-G	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AR9	-	XC6501C40AGR-G	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AR9	-	XC9261A29CER-G	DC-DC-IC	PWM/PFM step-down, 2.9V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ARA	-	TC1302ARAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARA	-	XC6501C41A7R-G	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ARA	-	XC6501C41AGR-G	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ARA	-	XC9261A2ACER-G	DC-DC-IC	PWM/PFM step-down, 2.05V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ARAA	-	TC1301ARAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARAB	-	TC1301ARABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARAC	-	TC1301ARACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARAD	-	TC1301ARADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARAE	-	TC1301ARAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARAF	-	TC1301ARAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARB	-	TC1302ARBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARB	-	XC6501C42A7R-G	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ARB	-	XC6501C42AGR-G	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ARB	-	XC9261A2BCER-G	DC-DC-IC	PWM/PFM step-down, 2.15V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ARBA	-	TC1301ARBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARBB	-	TC1301ARBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARBC	-	TC1301ARBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ARBD	-	TC1301ARBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARBE	-	TC1301ARBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARBF	-	TC1301ARBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARC	-	TC1302ARCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARC	-	XC6501C43A7R-G	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ARC	-	XC6501C43AGR-G	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ARC	-	XC9261A2CCER-G	DC-DC-IC	PWM/PFM step-down, 2.25V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ARCA	-	TC1301ARCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARCB	-	TC1301ARCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARCC	-	TC1301ARCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARCD	-	TC1301ARCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARCE	-	TC1301ARCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARCF	-	TC1301ARCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARD	-	TC1302ARDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARD	-	XC6501C44A7R-G	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ARD	-	XC6501C44AGR-G	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ARD	-	XC9261A2DCER-G	DC-DC-IC	PWM/PFM step-down, 2.35V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ARDA	-	TC1301ARDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARDB	-	TC1301ARDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARDC	-	TC1301ARDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARDD	-	TC1301ARDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARDE	-	TC1301ARDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARDF	-	TC1301ARDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARE	-	TC1302AREVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARE	-	XC6501C45A7R-G	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ARE	-	XC6501C45AGR-G	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ARE	-	XC9261A2ECER-G	DC-DC-IC	PWM/PFM step-down, 2.45V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AREA	-	TC1301AREAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AREB	-	TC1301AREBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AREC	-	TC1301ARECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARED	-	TC1301AREDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AREE	-	TC1301AREEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AREF	-	TC1301AREFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARF	-	TC1302ARFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARF	-	XC6501C46A7R-G	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ARF	-	XC6501C46AGR-G	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ARF	-	XC9261A2FCER-G	DC-DC-IC	PWM/PFM step-down, 2.55V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ARFA	-	TC1301ARFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARFB	-	TC1301ARFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARFC	-	TC1301ARFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARFD	-	TC1301ARFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARFE	-	TC1301ARFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARFF	-	TC1301ARFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARG	-	TC1302ARGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARGA	-	TC1301ARGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARGB	-	TC1301ARGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARGC	-	TC1301ARGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARGD	-	TC1301ARGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARGE	-	TC1301ARGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARGF	-	TC1301ARGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARH	-	TC1302ARHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARH	-	XC6501C47A7R-G	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ARH	-	XC6501C47AGR-G	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ARH	-	XC9261A2HCER-G	DC-DC-IC	PWM/PFM step-down, 2.65V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ARHA	-	TC1301ARHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARHB	-	TC1301ARHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARHC	-	TC1301ARHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARHD	-	TC1301ARHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARHE	-	TC1301ARHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARHF	-	TC1301ARHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARI	-	TC1302ARIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARIA	-	TC1301ARIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARIB	-	TC1301ARIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARIC	-	TC1301ARICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARID	-	TC1301ARIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARIE	-	TC1301ARIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARIF	-	TC1301ARIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARJ	-	TC1302ARJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARJA	-	TC1301ARJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARJB	-	TC1301ARJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ARJC	-	TC1301ARJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARJD	-	TC1301ARJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARJE	-	TC1301ARJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARJF	-	TC1301ARJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARK	-	TC1302ARKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARK	-	XC6501C48A7R-G	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ARK	-	XC6501C48AGR-G	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ARK	-	XC9261A2KCER-G	DC-DC-IC	PWM/PFM step-down, 2.75V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ARKA	-	TC1301ARKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARKB	-	TC1301ARKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARKC	-	TC1301ARKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARKD	-	TC1301ARKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARKE	-	TC1301ARKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARKF	-	TC1301ARKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARL	-	TC1302ARLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARL	-	XC6501C49A7R-G	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
ARL	-	XC6501C49AGR-G	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
ARL	-	XC9261A2LCER-G	DC-DC-IC	PWM/PFM step-down, 2.85V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ARLA	-	TC1301ARLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARLB	-	TC1301ARLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARLC	-	TC1301ARLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARLD	-	TC1301ARLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARLE	-	TC1301ARLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARLF	-	TC1301ARLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARM	-	TC1302ARMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARM	-	XC9261A2MCER-G	DC-DC-IC	PWM/PFM step-down, 2.95V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ARMA	-	TC1301ARMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARMB	-	TC1301ARMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARMC	-	TC1301ARMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARMD	-	TC1301ARMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARME	-	TC1301ARMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARMF	-	TC1301ARMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARN	-	TC1302ARNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARNA	-	TC1301ARNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARNB	-	TC1301ARNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARNC	-	TC1301ARNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARND	-	TC1301ARNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARNE	-	TC1301ARNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARNF	-	TC1301ARNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARO	-	TC1302AROVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AROA	-	TC1301AROAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AROB	-	TC1301AROBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AROC	-	TC1301AROCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AROD	-	TC1301ARODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AROE	-	TC1301AROEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AROF	-	TC1301AROFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARP	-	TC1302ARPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARPA	-	TC1301ARPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARPB	-	TC1301ARPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARPC	-	TC1301ARPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARPD	-	TC1301ARPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARPE	-	TC1301ARPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARPF	-	TC1301ARPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARQ	-	TC1302ARQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARQA	-	TC1301ARQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARQB	-	TC1301ARQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARQC	-	TC1301ARQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARQD	-	TC1301ARQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARQE	-	TC1301ARQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARQF	-	TC1301ARQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARR	-	TC1302ARRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARRA	-	TC1301ARRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARRB	-	TC1301ARRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARRC	-	TC1301ARRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARRD	-	TC1301ARRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARRE	-	TC1301ARREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARRF	-	TC1301ARRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARS	-	TC1302ARSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARSA	-	TC1301ARSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARSB	-	TC1301ARSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ARSC	-	TC1301ARSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARSD	-	TC1301ARSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARSE	-	TC1301ARSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARSF	-	TC1301ARSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ART	-	TC1302ARTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARTA	-	TC1301ARTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARTB	-	TC1301ARTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARTC	-	TC1301ARTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARTD	-	TC1301ARTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARTE	-	TC1301ARTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARTF	-	TC1301ARTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARU	-	TC1302ARUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARUA	-	TC1301ARUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARUB	-	TC1301ARUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARUC	-	TC1301ARUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARUD	-	TC1301ARUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARUE	-	TC1301ARUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARUF	-	TC1301ARUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARV	-	TC1302ARVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARVA	-	TC1301ARVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARVB	-	TC1301ARVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARVC	-	TC1301ARVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARVD	-	TC1301ARVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARVE	-	TC1301ARVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARVF	-	TC1301ARVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARW	-	TC1302ARWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ARWA	-	TC1301ARWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARWB	-	TC1301ARWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARWC	-	TC1301ARWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARWD	-	TC1301ARWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARWE	-	TC1301ARWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ARWF	-	TC1301ARWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AS	-	RP104K311B	LVR-IC	LDO, 3.1V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AS	-	XC6221A24B7R	LVR-IC	LDO, 2.45V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AS	-	XC6223C33B9R-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AS	-	XC6504A3317R-G	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AS	-	XC9244A31C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AS0	-	XC6501D31A7R-G	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AS0	-	XC6501D31AGR-G	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AS01	-	RP400K001A	DC-DC-IC	PWM step-up, 700kHz, Adj. 1.8..5V, 200mA, +CE	DFN1820-6	74	-	9b	Ric
AS02	-	RP400K181A	DC-DC-IC	PWM step-up, 700kHz, 1.8V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS03	-	RP400K191A	DC-DC-IC	PWM step-up, 700kHz, 1.9V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS04	-	RP400K201A	DC-DC-IC	PWM step-up, 700kHz, 2.0V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS05	-	RP400K211A	DC-DC-IC	PWM step-up, 700kHz, 2.1V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS06	-	RP400K221A	DC-DC-IC	PWM step-up, 700kHz, 2.2V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS07	-	RP400K231A	DC-DC-IC	PWM step-up, 700kHz, 2.3V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS08	-	RP400K241A	DC-DC-IC	PWM step-up, 700kHz, 2.4V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS09	-	RP400K251A	DC-DC-IC	PWM step-up, 700kHz, 2.5V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS1	-	XC6501D32A7R-G	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AS1	-	XC6501D32AGR-G	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AS10	-	RP400K261A	DC-DC-IC	PWM step-up, 700kHz, 2.6V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS11	-	RP400K271A	DC-DC-IC	PWM step-up, 700kHz, 2.7V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS12	-	RP400K281A	DC-DC-IC	PWM st-up, 700kHz, 2.8V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS13	-	RP400K291A	DC-DC-IC	PWM st-up, 700kHz, 2.9V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS14	-	RP400K301A	DC-DC-IC	PWM st-up, 700kHz, 3.0V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS15	-	RP400K311A	DC-DC-IC	PWM st-up, 700kHz, 3.1V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS16	-	RP400K321A	DC-DC-IC	PWM st-up, 700kHz, 3.2V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS17	-	RP400K331A	DC-DC-IC	PWM st-up, 700kHz, 3.3V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS18	-	RP400K341A	DC-DC-IC	PWM st-up, 700kHz, 3.4V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS19	-	RP400K351A	DC-DC-IC	PWM st-up, 700kHz, 3.5V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS2	-	XC6501D33A7R-G	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AS2	-	XC6501D33AGR-G	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AS20	-	RP400K361A	DC-DC-IC	PWM st-up, 700kHz, 3.6V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS21	-	RP400K371A	DC-DC-IC	PWM st-up, 700kHz, 3.7V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS22	-	RP400K381A	DC-DC-IC	PWM st-up, 700kHz, 3.8V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS23	-	RP400K391A	DC-DC-IC	PWM st-up, 700kHz, 3.9V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS24	-	RP400K401A	DC-DC-IC	PWM st-up, 700kHz, 4.0V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS25	-	RP400K411A	DC-DC-IC	PWM st-up, 700kHz, 4.1V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS26	-	RP400K421A	DC-DC-IC	PWM st-up, 700kHz, 4.2V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS27	-	RP400K431A	DC-DC-IC	PWM st-up, 700kHz, 4.3V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AS28	-	RP400K441A	DC-DC-IC	PWM st-up, 700kHz, 4.4V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS29	-	RP400K451A	DC-DC-IC	PWM st-up, 700kHz, 4.5V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS3	-	XC6501D34A7R-G	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AS3	-	XC6501D34AGR-G	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AS30	-	RP400K461A	DC-DC-IC	PWM st-up, 700kHz, 4.6V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS31	-	RP400K471A	DC-DC-IC	PWM st-up, 700kHz, 4.7V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS32	-	RP400K481A	DC-DC-IC	PWM st-up, 700kHz, 4.8V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS33	-	RP400K491A	DC-DC-IC	PWM st-up, 700kHz, 4.9V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS34	-	RP400K501A	DC-DC-IC	PWM st-up, 700kHz, 5.0V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AS4	-	XC6501D35A7R-G	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AS4	-	XC6501D35AGR-G	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AS5	-	XC6501D36A7R-G	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AS5	-	XC6501D36AGR-G	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AS6	-	XC6501D37A7R-G	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AS6	-	XC6501D37AGR-G	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AS7	-	XC6501D38A7R-G	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AS7	-	XC6501D38AGR-G	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AS8	-	XC6501D39A7R-G	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AS8	-	XC6501D39AGR-G	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AS9	-	XC6501D40A7R-G	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AS9	-	XC6501D40AGR-G	LVR-IC	LDO, 4.05V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ASA	-	TC1302ASAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASA	-	XC6501D41A7R-G	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ASA	-	XC6501D41AGR-G	LVR-IC	LDO, 4.15V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ASAA	-	TC1301ASAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASAB	-	TC1301ASABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASAC	-	TC1301ASACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASAD	-	TC1301ASADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASAE	-	TC1301ASAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASAF	-	TC1301ASAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASB	-	TC1302ASBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASB	-	XC6501D42A7R-G	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ASB	-	XC6501D42AGR-G	LVR-IC	LDO, 4.25V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ASBA	-	TC1301ASBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASBB	-	TC1301ASBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASBC	-	TC1301ASBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASBD	-	TC1301ASBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASBE	-	TC1301ASBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASBF	-	TC1301ASBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASBI	-	TPA6141A2YF	Lin-IC	AF PA, 2.5..5.5V, 2x32mW(3V/32Ω), shutdown	BGA-16	39	-	9a	Ti
ASC	-	TC1302ASCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASC	-	XC6501D43A7R-G	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ASC	-	XC6501D43AGR-G	LVR-IC	LDO, 4.35V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ASCA	-	TC1301ASCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASCB	-	TC1301ASCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASCC	-	TC1301ASCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASCD	-	TC1301ASCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASCE	-	TC1301ASCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASCF	-	TC1301ASCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASD	-	TC1302ASDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASD	-	XC6501D44A7R-G	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ASD	-	XC6501D44AGR-G	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ASDA	-	TC1301ASDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASDB	-	TC1301ASDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASDC	-	TC1301ASDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASDD	-	TC1301ASDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASDE	-	TC1301ASDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASDF	-	TC1301ASDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASE	-	TC1302ASEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASE	-	XC6501D45A7R-G	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ASE	-	XC6501D45AGR-G	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ASEA	-	TC1301ASEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASEB	-	TC1301ASEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASEC	-	TC1301ASECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASED	-	TC1301ASEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASEE	-	TC1301ASEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASEF	-	TC1301ASEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASF	-	MIC5320-3.3/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.5V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
ASF	-	TC1302ASFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASF	-	XC6501D46A7R-G	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ASF	-	XC6501D46AGR-G	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ASFA	-	TC1301ASFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASFB	-	TC1301ASFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASFC	-	TC1301ASFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASFD	-	TC1301ASFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASFE	-	TC1301ASFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASFF	-	TC1301ASFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASG	-	MIC5320-3.3/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
ASG	-	TC1302ASGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASG	mb	MIC5320-3.3/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9i	Mcr
ASGA	-	TC1301ASGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASGB	-	TC1301ASGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASGC	-	TC1301ASGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASGD	-	TC1301ASGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASGE	-	TC1301ASGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASGF	-	TC1301ASGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASH	-	TC1302ASHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASH	-	XC6501D47A7R-G	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ASH	-	XC6501D47AGR-G	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ASHA	-	TC1301ASHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASHB	-	TC1301ASHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASHC	-	TC1301ASHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASHD	-	TC1301ASHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASHE	-	TC1301ASHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASHF	-	TC1301ASHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASI	-	TC1302ASIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASIA	-	TC1301ASIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASIB	-	TC1301ASIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASIC	-	TC1301ASICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASID	-	TC1301ASIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASIE	-	TC1301ASIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASIF	-	TC1301ASIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASJ	-	MIC5320-3.3/2.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.5V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
ASJ	-	TC1302ASJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASJ	mb	MIC5320-3.3/2.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.5V±2%, 150mA, +CE	MLF-6	74g0	VR19	9i	Mcr
ASJA	-	TC1301ASJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASJB	-	TC1301ASJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASJC	-	TC1301ASJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASJD	-	TC1301ASJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASJE	-	TC1301ASJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASJF	-	TC1301ASJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASK	-	MIC5320-3.3/2.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.6V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
ASK	-	TC1302ASKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASK	-	XC6501D48A7R-G	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ASK	-	XC6501D48AGR-G	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ASKA	-	TC1301ASKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASKB	-	TC1301ASKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASKC	-	TC1301ASKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASKD	-	TC1301ASKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASKE	-	TC1301ASKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASKF	-	TC1301ASKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASL	-	MIC5320-3.3/2.7YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.7V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
ASL	-	TC1302ASLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASL	-	XC6501D49A7R-G	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
ASL	-	XC6501D49AGR-G	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
ASL	mb	MIC5320-3.3/2.7YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.7V±2%, 150mA, +CE	MLF-6	74g0	VR19	9i	Mcr
ASLA	-	TC1301ASLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASLB	-	TC1301ASLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASLC	-	TC1301ASLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASLD	-	TC1301ASLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASLE	-	TC1301ASLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASLF	-	TC1301ASLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASM	-	MIC5320-3.3/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
ASM	-	TC1302ASMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASM	mb	MIC5320-3.3/2.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9i	Mcr
ASMA	-	TC1301ASMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASMB	-	TC1301ASMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASMC	-	TC1301ASMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASMD	-	TC1301ASMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASME	-	TC1301ASMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ASMF	-	TC1301ASMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASN	-	MIC5320-3.3/2.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.85V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
ASN	-	TC1302ASNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASNA	-	TC1301ASNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASNB	-	TC1301ASNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASNC	-	TC1301ASNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASND	-	TC1301ASNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASNE	-	TC1301ASNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASNF	-	TC1301ASNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASO	-	MIC5320-3.3/2.9YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.9V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
ASO	-	TC1302ASOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASOA	-	TC1301ASOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASOB	-	TC1301ASOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASOC	-	TC1301ASOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASOD	-	TC1301ASODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASOE	-	TC1301ASOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASOF	-	TC1301ASOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASP	-	MIC5320-3.3/3.0YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.0V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
ASP	-	TC1302ASPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASPA	-	TC1301ASPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASPB	-	TC1301ASPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASPC	-	TC1301ASPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASPD	-	TC1301ASPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASPE	-	TC1301ASPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASPF	-	TC1301ASPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASQ	-	TC1302ASQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASQA	-	TC1301ASQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASQB	-	TC1301ASQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASQC	-	TC1301ASQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASQD	-	TC1301ASQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASQE	-	TC1301ASQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASQF	-	TC1301ASQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASR	-	MIC5320-3.3/3.2YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.2V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
ASR	-	TC1302ASRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASRA	-	TC1301ASRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASRB	-	TC1301ASRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASRC	-	TC1301ASRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASRD	-	TC1301ASRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASRE	-	TC1301ASREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASRF	-	TC1301ASRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASS	-	MIC5320-3.3/3.3YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
ASS	-	TC1302ASSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASSA	-	TC1301ASSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASSB	-	TC1301ASSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASSC	-	TC1301ASSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASSD	-	TC1301ASSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASSE	-	TC1301ASSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASSF	-	TC1301ASSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AST	-	TC1302ASTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASTA	-	TC1301ASTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASTB	-	TC1301ASTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASTC	-	TC1301ASTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASTD	-	TC1301ASTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASTE	-	TC1301ASTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASTF	-	TC1301ASTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASU	-	TC1302ASUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASUA	-	TC1301ASUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASUB	-	TC1301ASUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASUC	-	TC1301ASUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASUD	-	TC1301ASUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASUE	-	TC1301ASUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASUF	-	TC1301ASUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASV	-	TC1302ASVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ASVA	-	TC1301ASVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASVB	-	TC1301ASVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASVC	-	TC1301ASVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASVD	-	TC1301ASVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASVE	-	TC1301ASVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASVF	-	TC1301ASVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASW	-	TC1302ASWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ASWA	-	TC1301ASWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASWB	-	TC1301ASWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASWC	-	TC1301ASWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASWD	-	TC1301ASWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASWE	-	TC1301ASWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ASWF	-	TC1301ASWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
aT	-	74AUP1G175GF	CMOS-Log	Positive edge-triggered D-type flip-flop with reset	SOT891	52	Log40	9z	Nxp
aT	-	74AUP1G175GM	CMOS-Log	Positive edge-triggered D-type flip-flop with reset	SOT886	57	Log40	9z	Nxp
AT	-	RP104K241B	LVR-IC	LDO, 2.4V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AT	-	XC6221A25B7R	LVR-IC	LDO, 2.55V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AT	-	XC6223C34B9R-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AT	-	XC6504A3417R-G	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AT	-	XC9244A32C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AT0	-	XC6501P31AHR-G	LVR-IC	LDO, 3.15V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AT0	-	XC9261A30CER-G	DC-DC-IC	PWM/PFM step-down, 3.0V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AT01	-	RP400K001C	DC-DC-IC	PWM step-up, 700kHz, Adj. 1.8..5V, 200mA, +CE	DFN1820-6	74	-	9b	Ric
AT02	-	RP400K181C	DC-DC-IC	PWM step-up, 700kHz, 1.8V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT03	-	RP400K191C	DC-DC-IC	PWM step-up, 700kHz, 1.9V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT04	-	RP400K201C	DC-DC-IC	PWM step-up, 700kHz, 2.0V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT05	-	RP400K211C	DC-DC-IC	PWM step-up, 700kHz, 2.1V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT06	-	RP400K221C	DC-DC-IC	PWM step-up, 700kHz, 2.2V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT07	-	RP400K231C	DC-DC-IC	PWM step-up, 700kHz, 2.3V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT08	-	RP400K241C	DC-DC-IC	PWM step-up, 700kHz, 2.4V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT09	-	RP400K251C	DC-DC-IC	PWM step-up, 700kHz, 2.5V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT1	-	XC6501P32AHR-G	LVR-IC	LDO, 3.25V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AT1	-	XC9261A31CER-G	DC-DC-IC	PWM/PFM step-down, 3.1V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AT10	-	RP400K261C	DC-DC-IC	PWM step-up, 700kHz, 2.6V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT11	-	RP400K271C	DC-DC-IC	PWM step-up, 700kHz, 2.7V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT12	-	RP400K281C	DC-DC-IC	PWM st-up, 700kHz, 2.8V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT13	-	RP400K291C	DC-DC-IC	PWM st-up, 700kHz, 2.9V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT14	-	RP400K301C	DC-DC-IC	PWM st-up, 700kHz, 3.0V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT15	-	RP400K311C	DC-DC-IC	PWM st-up, 700kHz, 3.1V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT16	-	RP400K321C	DC-DC-IC	PWM st-up, 700kHz, 3.2V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT17	-	RP400K331C	DC-DC-IC	PWM st-up, 700kHz, 3.3V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT18	-	RP400K341C	DC-DC-IC	PWM st-up, 700kHz, 3.4V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT19	-	RP400K351C	DC-DC-IC	PWM st-up, 700kHz, 3.5V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT2	-	XC6501P33AHR-G	LVR-IC	LDO, 3.35V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AT2	-	XC9261A32CER-G	DC-DC-IC	PWM/PFM step-down, 3.2V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AT20	-	RP400K361C	DC-DC-IC	PWM st-up, 700kHz, 3.6V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT21	-	RP400K371C	DC-DC-IC	PWM st-up, 700kHz, 3.7V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT22	-	RP400K381C	DC-DC-IC	PWM st-up, 700kHz, 3.8V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT23	-	RP400K391C	DC-DC-IC	PWM st-up, 700kHz, 3.9V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT24	-	RP400K401C	DC-DC-IC	PWM st-up, 700kHz, 4.0V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT25	-	RP400K411C	DC-DC-IC	PWM st-up, 700kHz, 4.1V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT26	-	RP400K421C	DC-DC-IC	PWM st-up, 700kHz, 4.2V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT27	-	RP400K431C	DC-DC-IC	PWM st-up, 700kHz, 4.3V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT28	-	RP400K441C	DC-DC-IC	PWM st-up, 700kHz, 4.4V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT29	-	RP400K451C	DC-DC-IC	PWM st-up, 700kHz, 4.5V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT3	-	XC6501P34AHR-G	LVR-IC	LDO, 3.45V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AT3	-	XC9261A33CER-G	DC-DC-IC	PWM/PFM step-down, 3.3V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AT30	-	RP400K461C	DC-DC-IC	PWM st-up, 700kHz, 4.6V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT31	-	RP400K471C	DC-DC-IC	PWM st-up, 700kHz, 4.7V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT32	-	RP400K481C	DC-DC-IC	PWM st-up, 700kHz, 4.8V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT33	-	RP400K491C	DC-DC-IC	PWM st-up, 700kHz, 4.9V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT34	-	RP400K501C	DC-DC-IC	PWM st-up, 700kHz, 5.0V±2%, 200mA, +CE	DFN1820-6	74gn	DC19	9b	Ric
AT4	-	XC6501P35AHR-G	LVR-IC	LDO, 3.55V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AT4	-	XC9261A34CER-G	DC-DC-IC	PWM/PFM step-down, 3.4V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AT5	-	XC6501P36AHR-G	LVR-IC	LDO, 3.65V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AT5	-	XC9261A35CER-G	DC-DC-IC	PWM/PFM step-down, 3.5V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AT6	-	XC6501P37AHR-G	LVR-IC	LDO, 3.75V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AT6	-	XC9261A36CER-G	DC-DC-IC	PWM/PFM step-down, 3.6V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AT7	-	XC6501P38AHR-G	LVR-IC	LDO, 3.85V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AT8	-	XC6501P39AHR-G	LVR-IC	LDO, 3.95V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AT9	-	XC6501P40AHR-G	LVR-IC	LDO, 4.05V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ATA	-	TC1302ATAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATA	-	XC6501P41AHR-G	LVR-IC	LDO, 4.15V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ATA	-	XC9261A3ACER-G	DC-DC-IC	PWM/PFM step-down, 3.05V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ATAA	-	TC1301ATAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATAB	-	TC1301ATABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATAC	-	TC1301ATACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ATAD	-	TC1301ATADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATAE	-	TC1301ATAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATAF	-	TC1301ATAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATB	-	TC1302ATBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATB	-	XC6501P42AHR-G	LVR-IC	LDO, 4.25V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ATB	-	XC9261A3BCER-G	DC-DC-IC	PWM/PFM step-down, 3.15V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ATBA	-	TC1301ATBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATBB	-	TC1301ATBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATBC	-	TC1301ATBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATBD	-	TC1301ATBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATBE	-	TC1301ATBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATBF	-	TC1301ATBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATC	-	TC1302ATCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATC	-	XC6501P43AHR-G	LVR-IC	LDO, 4.35V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ATC	-	XC9261A3CCER-G	DC-DC-IC	PWM/PFM step-down, 3.25V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ATCA	-	TC1301ATCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATCB	-	TC1301ATCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATCC	-	TC1301ATCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATCD	-	TC1301ATCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATCE	-	TC1301ATCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATCF	-	TC1301ATCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATD	-	TC1302ATDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATD	-	XC6501P44AHR-G	LVR-IC	LDO, 4.45V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ATD	-	XC9261A3DCER-G	DC-DC-IC	PWM/PFM step-down, 3.35V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ATDA	-	TC1301ATDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATDB	-	TC1301ATDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATDC	-	TC1301ATDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATDD	-	TC1301ATDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATDE	-	TC1301ATDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATDF	-	TC1301ATDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATE	-	TC1302ATEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATE	-	XC6501P45AHR-G	LVR-IC	LDO, 4.55V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ATE	-	XC9261A3ECER-G	DC-DC-IC	PWM/PFM step-down, 3.45V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ATEA	-	TC1301ATEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATEB	-	TC1301ATEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATEC	-	TC1301ATECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATED	-	TC1301ATEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATEE	-	TC1301ATEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATEF	-	TC1301ATEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATF	-	TC1302ATFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATF	-	XC6501P46AHR-G	LVR-IC	LDO, 4.65V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ATF	-	XC9261A3FCER-G	DC-DC-IC	PWM/PFM step-down, 3.55V±2%, 1.5A, 1.2MHz, +CE	USP-6C	49s3	DC1	9a	Tor
ATFA	-	TC1301ATFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATFB	-	TC1301ATFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATFC	-	TC1301ATFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATFD	-	TC1301ATFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATFE	-	TC1301ATFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATFF	-	TC1301ATFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATG	-	TC1302ATGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATGA	-	TC1301ATGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATGB	-	TC1301ATGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATGC	-	TC1301ATGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATGD	-	TC1301ATGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATGE	-	TC1301ATGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATGF	-	TC1301ATGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATH	-	TC1302ATHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATH	-	XC6501P47AHR-G	LVR-IC	LDO, 4.75V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ATHA	-	TC1301ATHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATHB	-	TC1301ATHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATHC	-	TC1301ATHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATHD	-	TC1301ATHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATHE	-	TC1301ATHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATHF	-	TC1301ATHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATI	-	TC1302ATIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATIA	-	TC1301ATIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATIB	-	TC1301ATIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATIC	-	TC1301ATICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATID	-	TC1301ATIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATIE	-	TC1301ATIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATIF	-	TC1301ATIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ATJ	-	TC1302ATJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATJA	-	TC1301ATJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATJB	-	TC1301ATJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATJC	-	TC1301ATJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATJD	-	TC1301ATJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATJE	-	TC1301ATJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATJF	-	TC1301ATJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATK	-	TC1302ATKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATK	-	XC6501P48AHR-G	LVR-IC	LDO, 4.85V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ATKA	-	TC1301ATKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATKB	-	TC1301ATKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATKC	-	TC1301ATKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATKD	-	TC1301ATKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATKE	-	TC1301ATKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATKF	-	TC1301ATKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATL	-	TC1302ATLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATL	-	XC6501P49AHR-G	LVR-IC	LDO, 4.95V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
ATLA	-	TC1301ATLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATLB	-	TC1301ATLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATLC	-	TC1301ATLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATLD	-	TC1301ATLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATLE	-	TC1301ATLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATLF	-	TC1301ATLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATM	-	TC1302ATMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATMA	-	TC1301ATMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATMB	-	TC1301ATMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATMC	-	TC1301ATMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATMD	-	TC1301ATMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATME	-	TC1301ATMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATMF	-	TC1301ATMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATN	-	TC1302ATNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATNA	-	TC1301ATNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATNB	-	TC1301ATNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATNC	-	TC1301ATNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATND	-	TC1301ATNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATNE	-	TC1301ATNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATNF	-	TC1301ATNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATO	-	TC1302ATOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATOA	-	TC1301ATOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATOB	-	TC1301ATOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATOC	-	TC1301ATOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATOD	-	TC1301ATODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATOE	-	TC1301ATOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATOF	-	TC1301ATOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATP	-	TC1302ATPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATPA	-	TC1301ATPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATPB	-	TC1301ATPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATPC	-	TC1301ATPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATPD	-	TC1301ATPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATPE	-	TC1301ATPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATPF	-	TC1301ATPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATQ	-	MAX16057ATT17+	Vdet-IC	1.7V±2%, -MR, -Reset PPO	TDFN-8	92	-	9a	Max
ATQ	-	TC1302ATQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATQA	-	TC1301ATQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATQB	-	TC1301ATQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATQC	-	TC1301ATQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATQD	-	TC1301ATQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATQE	-	TC1301ATQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATQF	-	TC1301ATQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATR	-	MAX16057ATT23+	Vdet-IC	2.3V±2%, -MR, -Reset PPO	TDFN-8	92	-	9a	Max
ATR	-	TC1302ATRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATRA	-	TC1301ATRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATRB	-	TC1301ATRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATRC	-	TC1301ATRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATRD	-	TC1301ATRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATRE	-	TC1301ATREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATRF	-	TC1301ATRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATS	-	MAX16057ATT26+	Vdet-IC	2.6V±2%, -MR, -Reset PPO	TDFN-8	92	-	9a	Max
ATS	-	TC1302ATSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATSA	-	TC1301ATSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ATSB	-	TC1301ATSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATSC	-	TC1301ATSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATSD	-	TC1301ATSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATSE	-	TC1301ATSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATSF	-	TC1301ATSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATT	-	MAX16057ATT29+	Vdet-IC	2.9V±2%, -MR, -Reset PPO	TDFN-8	92	-	9a	Max
ATT	-	TC1302ATTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATTA	-	TC1301ATTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATTB	-	TC1301ATTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATTC	-	TC1301ATTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATTD	-	TC1301ATTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATTE	-	TC1301ATTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATTF	-	TC1301ATTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATU	-	TC1302ATUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATUA	-	TC1301ATUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATUB	-	TC1301ATUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATUC	-	TC1301ATUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATUD	-	TC1301ATUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATUE	-	TC1301ATUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATUF	-	TC1301ATUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATV	-	TC1302ATVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATVA	-	TC1301ATVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATVB	-	TC1301ATVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATVC	-	TC1301ATVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATVD	-	TC1301ATVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATVE	-	TC1301ATVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATVF	-	TC1301ATVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATW	-	MAX16059ATT16+	Vdet-IC	1.6V±2%, -MR, -Reset ODO	TDFN-8	92	-	9a	Max
ATW	-	TC1302ATWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
ATWA	-	TC1301ATWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATWB	-	TC1301ATWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATWC	-	TC1301ATWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATWD	-	TC1301ATWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATWE	-	TC1301ATWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATWF	-	TC1301ATWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
ATX	-	MAX16059ATT22+	Vdet-IC	2.2V±2%, -MR, -Reset ODO	TDFN-8	92	-	9a	Max
ATY	-	MAX16059ATT26+	Vdet-IC	2.6V±2%, -MR, -Reset ODO	TDFN-8	92	-	9a	Max
ATZ	-	MAX16059ATT29+	Vdet-IC	2.9V±2%, -MR, -Reset ODO	TDFN-8	92	-	9a	Max
aU	-	74AUP1G158GF	CMOS-Log	2-input inverting multiplexer	SOT891	52	Log48	9z	Nxp
aU	-	74AUP1G158GM	CMOS-Log	2-input inverting multiplexer	SOT886	57	Log48	9z	Nxp
AU	-	RP104K221B	LVR-IC	LDO, 2.2V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AU	-	XC6221A26B7R	LVR-IC	LDO, 2.65V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AU	-	XC6223C35B9R-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AU	-	XC6504A3517R-G	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AU	-	XC9244A33C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AU8	-	XC9261A08DER-G	DC-DC-IC	PWM/PFM step-down, 0.8V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AU9	-	XC9261A09DER-G	DC-DC-IC	PWM/PFM step-down, 0.9V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AUA	-	MAX16059ATT31+	Vdet-IC	3.1V±2%, -MR, -Reset ODO	TDFN-8	92	-	9a	Max
AUA	-	TC1302AUAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUAA	-	TC1301AUAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUAB	-	TC1301AUABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUAC	-	TC1301AUACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUAD	-	TC1301AUADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUAE	-	TC1301AUAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUAF	-	TC1301AUAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUB	-	MAX16059ATT44+	Vdet-IC	4.4V±2%, -MR, -Reset ODO	TDFN-8	92	-	9a	Max
AUB	-	TC1302AUBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUB	-	XC6501A1217GR-G	LVR-IC	LDO, 1.2V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUB	-	XC6501A1217R-G	LVR-IC	LDO, 1.2V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUBA	-	TC1301AUBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUBB	-	TC1301AUBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUBC	-	TC1301AUBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUBD	-	TC1301AUBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUBE	-	TC1301AUBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUBF	-	TC1301AUBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUC	-	MAX16057ATT36+	Vdet-IC	3.6V±2%, -MR, -Reset PPO	TDFN-8	92	-	9a	Max
AUC	-	TC1302AUCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUC	-	XC6501A1317R-G	LVR-IC	LDO, 1.3V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUC	-	XC6501A131GR-G	LVR-IC	LDO, 1.3V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUCA	-	TC1301AUCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AUCB	-	TC1301AUCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUCC	-	TC1301AUCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUCD	-	TC1301AUCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUCE	-	TC1301AUCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUCF	-	TC1301AUCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUD	-	MAX16057ATT41+	Vdet-IC	4.1V±2%, -MR, -Reset PPO	TDFN-8	92	-	9a	Max
AUD	-	TC1302AUDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUD	-	XC6501A1417R-G	LVR-IC	LDO, 1.4V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUD	-	XC6501A141GR-G	LVR-IC	LDO, 1.4V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUDA	-	TC1301AUDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUDB	-	TC1301AUDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUDC	-	TC1301AUDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUDD	-	TC1301AUDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUDE	-	TC1301AUDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUDF	-	TC1301AUDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUE	-	TC1302AUEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUE	-	XC6501A1517R-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUE	-	XC6501A151GR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUEA	-	TC1301AUEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUEB	-	TC1301AUEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUEC	-	TC1301AUECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUED	-	TC1301AUEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUEE	-	TC1301AUEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUEF	-	TC1301AUEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUF	-	TC1302AUFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUF	-	XC6501A1617R-G	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUF	-	XC6501A161GR-G	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUFA	-	TC1301AUFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUFB	-	TC1301AUFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUFC	-	TC1301AUFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUFD	-	TC1301AUFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUFE	-	TC1301AUFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUFF	-	TC1301AUFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUG	-	TC1302AUGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUGA	-	TC1301AUGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUGB	-	TC1301AUGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUGC	-	TC1301AUGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUGD	-	TC1301AUGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUGE	-	TC1301AUGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUGF	-	TC1301AUGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUH	-	TC1302AUHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUH	-	XC6501A1717R-G	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUH	-	XC6501A171GR-G	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUHA	-	TC1301AUHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUHB	-	TC1301AUHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUHC	-	TC1301AUHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUHD	-	TC1301AUHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUHE	-	TC1301AUHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUHF	-	TC1301AUHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUI	-	TC1302AUIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUIA	-	TC1301AUIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUIB	-	TC1301AUIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUIC	-	TC1301AUICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUID	-	TC1301AUIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUIE	-	TC1301AUIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUIF	-	TC1301AUIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUJ	-	TC1302AUJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUJA	-	TC1301AUJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUJB	-	TC1301AUJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUJC	-	TC1301AUJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUJD	-	TC1301AUJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUJE	-	TC1301AUJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUJF	-	TC1301AUJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUK	-	TC1302AUKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUK	-	XC6501A1817R-G	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUK	-	XC6501A181GR-G	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUKA	-	TC1301AUKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUKB	-	TC1301AUKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUKC	-	TC1301AUKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUKD	-	TC1301AUKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AUKE	-	TC1301AUKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUKF	-	TC1301AUKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUL	-	TC1302AULVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUL	-	XC6501A1917R-G	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUL	-	XC6501A191GR-G	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUL	-	XC9261A0LDER-G	DC-DC-IC	PWM/PFM step-down, 0.85V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AULA	-	TC1301AULAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AULB	-	TC1301AULBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AULC	-	TC1301AULCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AULD	-	TC1301AULDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AULE	-	TC1301AULEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AULF	-	TC1301AULFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUM	-	TC1302AUMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUM	-	XC6501A2017R-G	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUM	-	XC6501A201GR-G	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUM	-	XC9261A0MDER-G	DC-DC-IC	PWM/PFM step-down, 0.95V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AUMA	-	TC1301AUMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUMB	-	TC1301AUMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUMC	-	TC1301AUMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUMD	-	TC1301AUMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUME	-	TC1301AUMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUMF	-	TC1301AUMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUN	-	TC1302AUNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUN	-	XC6501A2117R-G	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUN	-	XC6501A211GR-G	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUNA	-	TC1301AUNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUNB	-	TC1301AUNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUNC	-	TC1301AUNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUND	-	TC1301AUNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUNE	-	TC1301AUNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUNF	-	TC1301AUNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUO	-	TC1302AUOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUOA	-	TC1301AUOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUOB	-	TC1301AUOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUOC	-	TC1301AUOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUOD	-	TC1301AUODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUOE	-	TC1301AUOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUOF	-	TC1301AUOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUP	-	TC1302AUPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUP	-	XC6501A2217R-G	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUP	-	XC6501A221GR-G	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUPA	-	TC1301AUPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUPB	-	TC1301AUPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUPC	-	TC1301AUPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUPD	-	TC1301AUPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUPE	-	TC1301AUPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUPF	-	TC1301AUPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUQ	-	TC1302AUQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUQA	-	TC1301AUQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUQB	-	TC1301AUQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUQC	-	TC1301AUQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUQD	-	TC1301AUQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUQE	-	TC1301AUQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUQF	-	TC1301AUQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUR	-	TC1302AURVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUR	-	XC6501A2317R-G	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUR	-	XC6501A231GR-G	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AURA	-	TC1301AURAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AURB	-	TC1301AURBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AURC	-	TC1301AURCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AURD	-	TC1301AURDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AURE	-	TC1301AUREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AURF	-	TC1301AURFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUS	-	TC1302AUSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUS	-	XC6501A2417R-G	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUS	-	XC6501A241GR-G	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUSA	-	TC1301AUSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUSB	-	TC1301AUSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUSC	-	TC1301AUSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUSD	-	TC1301AUSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AUSE	-	TC1301AUSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUSF	-	TC1301AUSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUT	-	TC1302AUTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUT	-	XC6501A2517R-G	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUT	-	XC6501A251GR-G	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUTA	-	TC1301AUTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUTB	-	TC1301AUTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUTC	-	TC1301AUTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUTD	-	TC1301AUTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUTE	-	TC1301AUTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUTF	-	TC1301AUTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUU	-	MAX9820ETB+	Lin-IC	AF PA, 4.5..5V, 2x95mW(5V/32Ω), shutdown	DFN-10	37	-	9m	Max
AUU	-	TC1302AUUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUU	-	XC6501A2617R-G	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUU	-	XC6501A261GR-G	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUUA	-	TC1301AUUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUUB	-	TC1301AUUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUUC	-	TC1301AUUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUUD	-	TC1301AUUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUUE	-	TC1301AUUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUUF	-	TC1301AUUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUV	-	TC1302AUVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUV	-	XC6501A2717R-G	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUV	-	XC6501A271GR-G	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUVA	-	TC1301AUVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUVB	-	TC1301AUVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUVC	-	TC1301AUVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUVD	-	TC1301AUVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUVE	-	TC1301AUVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUVF	-	TC1301AUVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUW	-	TC1302AUWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AUWA	-	TC1301AUWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUWB	-	TC1301AUWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUWC	-	TC1301AUWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUWD	-	TC1301AUWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUWE	-	TC1301AUWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUWF	-	TC1301AUWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AUX	-	XC6501A2817R-G	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUX	-	XC6501A281GR-G	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUY	-	XC6501A2917R-G	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUY	-	XC6501A291GR-G	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
AUZ	-	XC6501A3017R-G	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
AUZ	-	XC6501A301GR-G	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	USP-4	45vm	VR4	9a	Tor
aV	-	74AUP1G97GF	CMOS-Log	Configurable multiple-function gate	SOT891	52	Log41	9z	Nxp
aV	-	74AUP1G97GM	CMOS-Log	Configurable multiple-function gate	SOT886	57	Log41	9z	Nxp
AV	-	RP104K231B	LVR-IC	LDO, 2.3V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AV	-	XC6221A27B7R	LVR-IC	LDO, 2.75V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AV	-	XC6223C36B9R-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AV	-	XC6504A3617R-G	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AV	-	XC9244A34C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AV0	-	XC9261A10DER-G	DC-DC-IC	PWM/PFM step-down, 1.0V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AV1	-	XC9261A11DER-G	DC-DC-IC	PWM/PFM step-down, 1.1V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AV2	-	XC9261A12DER-G	DC-DC-IC	PWM/PFM step-down, 1.2V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AV3	-	XC9261A13DER-G	DC-DC-IC	PWM/PFM step-down, 1.3V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AV4	-	XC9261A14DER-G	DC-DC-IC	PWM/PFM step-down, 1.4V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AV5	-	XC9261A15DER-G	DC-DC-IC	PWM/PFM step-down, 1.5V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AV6	-	XC9261A16DER-G	DC-DC-IC	PWM/PFM step-down, 1.6V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AV7	-	XC9261A17DER-G	DC-DC-IC	PWM/PFM step-down, 1.7V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AV8	-	XC9261A18DER-G	DC-DC-IC	PWM/PFM step-down, 1.8V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AV9	-	XC9261A19DER-G	DC-DC-IC	PWM/PFM step-down, 1.9V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AVA	-	TC1302AVAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVA	-	XC9261A1ADER-G	DC-DC-IC	PWM/PFM step-down, 1.05V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AVAA	-	TC1301AVAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVAB	-	TC1301AVABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVAC	-	TC1301AVACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVAD	-	TC1301AVADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVAE	-	TC1301AVAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVAF	-	TC1301AVAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVB	-	TC1302AVBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVB	-	XC6501B1217R-G	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AVB	-	XC6501B121GR-G	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVB	-	XC9261A1BDER-G	DC-DC-IC	PWM/PFM step-down, 1.15V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AVBA	-	TC1301AVBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVBB	-	TC1301AVBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVBC	-	TC1301AVBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVBD	-	TC1301AVBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVBE	-	TC1301AVBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVBF	-	TC1301AVBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVC	-	TC1302AVCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVC	-	XC6501B1317R-G	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVC	-	XC6501B131GR-G	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVC	-	XC9261A1CDER-G	DC-DC-IC	PWM/PFM step-down, 1.25V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AVCA	-	TC1301AVCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVCB	-	TC1301AVCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVCC	-	TC1301AVCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVCD	-	TC1301AVCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVCE	-	TC1301AVCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVCF	-	TC1301AVCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVD	-	TC1302AVDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVD	-	XC6501B1417R-G	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVD	-	XC6501B141GR-G	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVD	-	XC9261A1DDER-G	DC-DC-IC	PWM/PFM step-down, 1.35VV±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AVDA	-	TC1301AVDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVDB	-	TC1301AVDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVDC	-	TC1301AVDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVDD	-	TC1301AVDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVDE	-	TC1301AVDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVDF	-	TC1301AVDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVE	-	TC1302AVEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVE	-	XC6501B1517R-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVE	-	XC6501B151GR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVE	-	XC9261A1EDER-G	DC-DC-IC	PWM/PFM step-down, 1.45V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AVEA	-	TC1301AVEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVEB	-	TC1301AVEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVEC	-	TC1301AVECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVED	-	TC1301AVEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVEE	-	TC1301AVEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVEF	-	TC1301AVEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVF	-	TC1302AVFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVF	-	XC6501B1617R-G	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVF	-	XC6501B161GR-G	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVF	-	XC9261A1FDER-G	DC-DC-IC	PWM/PFM step-down, 1.55V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AVFA	-	TC1301AVFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVFB	-	TC1301AVFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVFC	-	TC1301AVFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVFD	-	TC1301AVFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVFE	-	TC1301AVFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVFF	-	TC1301AVFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVG	-	TC1302AVGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVGA	-	TC1301AVGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVGB	-	TC1301AVGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVGC	-	TC1301AVGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVGD	-	TC1301AVGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVGE	-	TC1301AVGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVGF	-	TC1301AVGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVH	-	TC1302AVHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVH	-	XC6501B1717R-G	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVH	-	XC6501B171GR-G	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVH	-	XC9261A1HDER-G	DC-DC-IC	PWM/PFM step-down, 1.65V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AVHA	-	TC1301AVHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVHB	-	TC1301AVHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVHC	-	TC1301AVHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVHD	-	TC1301AVHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVHE	-	TC1301AVHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVHF	-	TC1301AVHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVI	-	TC1302AVIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVIA	-	TC1301AVIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVIB	-	TC1301AVIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVIC	-	TC1301AVICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVID	-	TC1301AVIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AVIE	-	TC1301AVIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVIF	-	TC1301AVIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVJ	-	TC1302AVJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVJA	-	TC1301AVJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVJB	-	TC1301AVJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVJC	-	TC1301AVJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVJD	-	TC1301AVJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVJE	-	TC1301AVJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVJF	-	TC1301AVJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVK	-	TC1302AVKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVK	-	XC6501B1817R-G	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVK	-	XC6501B181GR-G	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVK	-	XC9261A1KDER-G	DC-DC-IC	PWM/PFM step-down, 1.75V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AVKA	-	TC1301AVKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVKB	-	TC1301AVKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVKC	-	TC1301AVKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVKD	-	TC1301AVKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVKE	-	TC1301AVKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVKF	-	TC1301AVKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVL	-	TC1302AVLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVL	-	XC6501B1917R-G	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVL	-	XC6501B191GR-G	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVL	-	XC9261A1LDER-G	DC-DC-IC	PWM/PFM step-down, 1.85V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AVLA	-	TC1301AVLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVLB	-	TC1301AVLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVLC	-	TC1301AVLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVLD	-	TC1301AVLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVLE	-	TC1301AVLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVLF	-	TC1301AVLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVM	-	TC1302AVMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVM	-	XC6501B2017R-G	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVM	-	XC6501B201GR-G	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVM	-	XC9261A1MDER-G	DC-DC-IC	PWM/PFM step-down, 1.95V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AVMA	-	TC1301AVMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVMB	-	TC1301AVMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVMC	-	TC1301AVMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVMD	-	TC1301AVMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVME	-	TC1301AVMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVMF	-	TC1301AVMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVN	-	TC1302AVNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVN	-	XC6501B2117R-G	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVN	-	XC6501B211GR-G	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVNA	-	TC1301AVNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVNB	-	TC1301AVNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVNC	-	TC1301AVNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVND	-	TC1301AVNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVNE	-	TC1301AVNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVNF	-	TC1301AVNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVO	-	TC1302AVOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVOA	-	TC1301AVOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVOB	-	TC1301AVOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVOC	-	TC1301AVOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVOD	-	TC1301AVODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVOE	-	TC1301AVOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVOF	-	TC1301AVOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVP	-	TC1302AVPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVP	-	XC6501B2217R-G	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVP	-	XC6501B221GR-G	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVPA	-	TC1301AVPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVPB	-	TC1301AVPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVPC	-	TC1301AVPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVPD	-	TC1301AVPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVPE	-	TC1301AVPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVPF	-	TC1301AVPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVQ	-	TC1302AVQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVQA	-	TC1301AVQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVQB	-	TC1301AVQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVQC	-	TC1301AVQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVQD	-	TC1301AVQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVQE	-	TC1301AVQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AVQF	-	TC1301AVQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVR	-	TC1302AVRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVR	-	XC6501B2317R-G	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVR	-	XC6501B231GR-G	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVRA	-	TC1301AVRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVRB	-	TC1301AVRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVRC	-	TC1301AVRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVRD	-	TC1301AVRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVRE	-	TC1301AVREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVRF	-	TC1301AVRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVS	-	TC1302AVSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVS	-	XC6501B2417R-G	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVS	-	XC6501B241GR-G	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVSA	-	TC1301AVSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVSB	-	TC1301AVSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVSC	-	TC1301AVSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVSD	-	TC1301AVSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVSE	-	TC1301AVSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVSF	-	TC1301AVSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVT	-	TC1302AVTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVT	-	XC6501B2517R-G	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVT	-	XC6501B251GR-G	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVTA	-	TC1301AVTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVTB	-	TC1301AVTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVTC	-	TC1301AVTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVTD	-	TC1301AVTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVTE	-	TC1301AVTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVTF	-	TC1301AVTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVU	-	TC1302AVUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVU	-	XC6501B2617R-G	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVU	-	XC6501B261GR-G	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVUA	-	TC1301AVUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVUB	-	TC1301AVUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVUC	-	TC1301AVUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVUD	-	TC1301AVUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVUE	-	TC1301AVUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVUF	-	TC1301AVUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVV	-	TC1302AVVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVV	-	XC6501B2717R-G	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVV	-	XC6501B271GR-G	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVVA	-	TC1301AVVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVVB	-	TC1301AVVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVVC	-	TC1301AVVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVVD	-	TC1301AVVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVVE	-	TC1301AVVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVVF	-	TC1301AVVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVW	-	TC1302AVWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AVWA	-	TC1301AVWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVWB	-	TC1301AVWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVWC	-	TC1301AVWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVWD	-	TC1301AVWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVWE	-	TC1301AVWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVWF	-	TC1301AVWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AVX	-	XC6501B2817R-G	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVX	-	XC6501B281GR-G	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVY	-	XC6501B2917R-G	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVY	-	XC6501B291GR-G	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
AVZ	-	XC6501B3017R-G	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9h	Tor
AVZ	-	XC6501B301GR-G	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
aW	-	74AUP1G373GF	CMOS-Log	D-type transparent latch with 3-state output	SOT891	52	Log35	9z	Nxp
aW	-	74AUP1G373GM	CMOS-Log	D-type transparent latch with 3-state output	SOT886	57	Log35	9z	Nxp
AW	-	RP104K271B5	LVR-IC	LDO, 2.75V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AWA	-	TC1302AWAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWAA	-	TC1301AWAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWAB	-	TC1301AWABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWAC	-	TC1301AWACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWAD	-	TC1301AWADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWAE	-	TC1301AWAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWAF	-	TC1301AWAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWB	-	TC1302AWBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AWBA	-	TC1301AWBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWBB	-	TC1301AWBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWBC	-	TC1301AWBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWBD	-	TC1301AWBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWBE	-	TC1301AWBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWBF	-	TC1301AWBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWC	-	TC1302AWCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWCA	-	TC1301AWCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWCB	-	TC1301AWCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWCC	-	TC1301AWCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWCD	-	TC1301AWCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWCE	-	TC1301AWCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWCF	-	TC1301AWCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWD	-	TC1302AWDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWDA	-	TC1301AWDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWDB	-	TC1301AWDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWDC	-	TC1301AWDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWDD	-	TC1301AWDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWDE	-	TC1301AWDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWDF	-	TC1301AWDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWE	-	TC1302AWEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWEA	-	TC1301AWEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWEB	-	TC1301AWEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWEC	-	TC1301AWECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWED	-	TC1301AWEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWEE	-	TC1301AWEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWEF	-	TC1301AWEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWF	-	TC1302AWFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWFA	-	TC1301AWFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWFB	-	TC1301AWFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWFC	-	TC1301AWFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWFD	-	TC1301AWFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWFE	-	TC1301AWFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWFF	-	TC1301AWFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWG	-	TC1302AWGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWGA	-	TC1301AWGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWGB	-	TC1301AWGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWGC	-	TC1301AWGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWGD	-	TC1301AWGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWGE	-	TC1301AWGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWGF	-	TC1301AWGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWH	-	TC1302AWHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWHA	-	TC1301AWHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWHB	-	TC1301AWHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWHC	-	TC1301AWHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWHD	-	TC1301AWHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWHE	-	TC1301AWHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWHF	-	TC1301AWHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWI	-	TC1302AWIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWIA	-	TC1301AWIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWIB	-	TC1301AWIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWIC	-	TC1301AWICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWID	-	TC1301AWIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWIE	-	TC1301AWIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWIF	-	TC1301AWIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWJ	-	TC1302AWJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWJA	-	TC1301AWJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWJB	-	TC1301AWJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWJC	-	TC1301AWJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWJD	-	TC1301AWJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWJE	-	TC1301AWJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWJF	-	TC1301AWJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWK	-	TC1302AWKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWKA	-	TC1301AWKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWKB	-	TC1301AWKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWKC	-	TC1301AWKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWKD	-	TC1301AWKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWKE	-	TC1301AWKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWKF	-	TC1301AWKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWL	-	TC1302AWLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AWLA	-	TC1301AWLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWLB	-	TC1301AWLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWLC	-	TC1301AWLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWLD	-	TC1301AWLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWLE	-	TC1301AWLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWLF	-	TC1301AWLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWM	-	TC1302AWMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWMA	-	TC1301AWMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWMB	-	TC1301AWMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWMC	-	TC1301AWMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWMD	-	TC1301AWMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWME	-	TC1301AWMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWMF	-	TC1301AWMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWN	-	TC1302AWNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWNA	-	TC1301AWNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWNB	-	TC1301AWNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWNC	-	TC1301AWNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWND	-	TC1301AWNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWNE	-	TC1301AWNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWNF	-	TC1301AWNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWO	-	TC1302AWOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWOA	-	TC1301AWOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWOB	-	TC1301AWOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWOC	-	TC1301AWOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWOD	-	TC1301AWODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWOE	-	TC1301AWOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWOF	-	TC1301AWOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWP	-	TC1302AWPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWPA	-	TC1301AWPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWPB	-	TC1301AWPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWPC	-	TC1301AWPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWPD	-	TC1301AWPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWPE	-	TC1301AWPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWPF	-	TC1301AWPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWQ	-	TC1302AWQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWQA	-	TC1301AWQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWQB	-	TC1301AWQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWQC	-	TC1301AWQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWQD	-	TC1301AWQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWQE	-	TC1301AWQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWQF	-	TC1301AWQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWR	-	TC1302AWRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWRA	-	TC1301AWRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWRB	-	TC1301AWRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWRC	-	TC1301AWRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWRD	-	TC1301AWRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWRE	-	TC1301AWREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWRF	-	TC1301AWRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWS	-	TC1302AWSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWSA	-	TC1301AWSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWSB	-	TC1301AWSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWSC	-	TC1301AWSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWSD	-	TC1301AWSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWSE	-	TC1301AWSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWSF	-	TC1301AWSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWT	-	TC1302AWTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWTA	-	TC1301AWTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWTB	-	TC1301AWTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWTC	-	TC1301AWTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWTD	-	TC1301AWTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWTE	-	TC1301AWTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWTF	-	TC1301AWTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWU	-	TC1302AWUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWUA	-	TC1301AWUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWUB	-	TC1301AWUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWUC	-	TC1301AWUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWUD	-	TC1301AWUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWUE	-	TC1301AWUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWUF	-	TC1301AWUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWV	-	TC1302AWVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AWVA	-	TC1301AWVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWVB	-	TC1301AWVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWVC	-	TC1301AWVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWVD	-	TC1301AWVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWVE	-	TC1301AWVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWVF	-	TC1301AWVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWW	-	TC1302AWWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u3	VR30	9w	Mcc
AWWA	-	TC1301AWWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWWB	-	TC1301AWWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWWC	-	TC1301AWWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWWD	-	TC1301AWWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWWE	-	TC1301AWWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
AWWF	-	TC1301AWWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u1	VR27	9w	Mcc
aX	-	74AUP1G374GF	CMOS-Log	Positive edge–triggered D-type flip-flop with 3-state output	SOT891	52	Log28	9z	Nxp
aX	-	74AUP1G374GM	CMOS-Log	Positive edge–triggered D-type flip-flop with 3-state output	SOT886	57	Log28	9z	Nxp
AX	-	RP104K211B	LVR-IC	LDO, 2.1V±0.8%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
AX	-	XC6221A28B7R	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AX	-	XC6223C37B9R-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AX	-	XC6504A3717R-G	LVR-IC	LDO, 3.7V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AX	-	XC9244A35C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AX0	-	XC9261A20DER-G	DC-DC-IC	PWM/PFM step-down, 2.0V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AX1	-	XC9261A21DER-G	DC-DC-IC	PWM/PFM step-down, 2.1V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AX2	-	XC9261A22DER-G	DC-DC-IC	PWM/PFM step-down, 2.2V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AX3	-	XC9261A23DER-G	DC-DC-IC	PWM/PFM step-down, 2.3V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AX4	-	XC9261A24DER-G	DC-DC-IC	PWM/PFM step-down, 2.4V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AX5	-	XC9261A25DER-G	DC-DC-IC	PWM/PFM step-down, 2.5V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AX6	-	XC9261A26DER-G	DC-DC-IC	PWM/PFM step-down, 2.6V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AX7	-	XC9261A27DER-G	DC-DC-IC	PWM/PFM step-down, 2.7V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AX8	-	XC9261A28DER-G	DC-DC-IC	PWM/PFM step-down, 2.8V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AX9	-	XC9261A29DER-G	DC-DC-IC	PWM/PFM step-down, 2.9V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AXA	-	XC9261A2ADER-G	DC-DC-IC	PWM/PFM step-down, 2.05V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AXB	-	XC6501C1217R-G	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXB	-	XC6501C121GR-G	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXB	-	XC9261A2BDER-G	DC-DC-IC	PWM/PFM step-down, 2.15V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AXC	-	XC6501C1317R-G	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXC	-	XC6501C131GR-G	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXC	-	XC9261A2CDER-G	DC-DC-IC	PWM/PFM step-down, 2.25V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AXD	-	XC6501C1417R-G	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXD	-	XC6501C141GR-G	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXD	-	XC9261A2DDER-G	DC-DC-IC	PWM/PFM step-down, 2.35V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AXE	-	XC6501C1517R-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXE	-	XC6501C151GR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXE	-	XC9261A2EDER-G	DC-DC-IC	PWM/PFM step-down, 2.45V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AXF	-	XC6501C1617R-G	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXF	-	XC6501C161GR-G	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXF	-	XC9261A2FDER-G	DC-DC-IC	PWM/PFM step-down, 2.55V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AXH	-	XC6501C1717R-G	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXH	-	XC6501C171GR-G	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXH	-	XC9261A2HDER-G	DC-DC-IC	PWM/PFM step-down, 2.65V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AXK	-	XC6501C1817R-G	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXK	-	XC6501C181GR-G	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXK	-	XC9261A2KDER-G	DC-DC-IC	PWM/PFM step-down, 2.75V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AXL	-	XC6501C1917R-G	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXL	-	XC6501C191GR-G	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXL	-	XC9261A2LDER-G	DC-DC-IC	PWM/PFM step-down, 2.85V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AXM	-	XC6501C2017R-G	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXM	-	XC6501C201GR-G	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXM	-	XC9261A2MDER-G	DC-DC-IC	PWM/PFM step-down, 2.95V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AXN	-	XC6501C2117R-G	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXN	-	XC6501C211GR-G	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXP	-	XC6501C2217R-G	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXP	-	XC6501C221GR-G	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXR	-	XC6501C2317R-G	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXR	-	XC6501C231GR-G	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXS	-	XC6501C2417R-G	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXS	-	XC6501C241GR-G	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXT	-	XC6501C2517R-G	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXT	-	XC6501C251GR-G	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXU	-	XC6501C2617R-G	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXU	-	XC6501C261GR-G	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AXV	-	XC6501C2717R-G	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXV	-	XC6501C271GR-G	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXX	-	XC6501C2817R-G	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXX	-	XC6501C281GR-G	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXY	-	LN4990A	Lin-IC	AF PA, BTL, 2.5..5.5V, 2W(5V/4Ω), shutdown	BGA-9	39	-	9a	Nln
AXY	-	XC6501C2917R-G	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXY	-	XC6501C291GR-G	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
AXZ	-	XC6501C3017R-G	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, PDR	USPN-4	58vm	VR4	9h	Tor
AXZ	-	XC6501C301GR-G	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, PDR	USP-4	45vm	VR4	9a	Tor
aY	-	74AUP1G0832GF	CMOS-Log	3-input AND-OR gate	SOT891	52	Log45	9z	Nxp
aY	-	74AUP1G0832GM	CMOS-Log	3-input AND-OR gate	SOT886	57	Log45	9z	Nxp
aY	-	74AUP1G0832GN	CMOS-Log	3-input AND-OR gate	SOT1115	52	Log45	9z	Nxp
aY	-	74AUP1G0832GS	CMOS-Log	3-input AND-OR gate	SOT1202	52	Log45	9z	Nxp
AY	-	XC6221A29B7R	LVR-IC	LDO, 2.95V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AY	-	XC6223C38B9R-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AY	-	XC6504A3817R-G	LVR-IC	LDO, 3.8V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AY	-	XC9244A36C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AY0	-	XC9261A30DER-G	DC-DC-IC	PWM/PFM step-down, 3.0V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AY1	-	XC9261A31DER-G	DC-DC-IC	PWM/PFM step-down, 3.1V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AY2	-	XC9261A32DER-G	DC-DC-IC	PWM/PFM step-down, 3.2V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AY3	-	XC9261A33DER-G	DC-DC-IC	PWM/PFM step-down, 3.3V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AY4	-	XC9261A34DER-G	DC-DC-IC	PWM/PFM step-down, 3.4V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AY5	-	XC9261A35DER-G	DC-DC-IC	PWM/PFM step-down, 3.5V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AY6	-	XC9261A36DER-G	DC-DC-IC	PWM/PFM step-down, 3.6V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AYA	-	XC9261A3ADER-G	DC-DC-IC	PWM/PFM step-down, 3.05V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AYB	-	XC6501D1217R-G	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYB	-	XC6501D121GR-G	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYB	-	XC9261A3BDER-G	DC-DC-IC	PWM/PFM step-down, 3.15V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AYC	-	XC6501D1317R-G	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYC	-	XC6501D131GR-G	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYC	-	XC9261A3CDER-G	DC-DC-IC	PWM/PFM step-down, 3.25V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AYD	-	XC6501D1417R-G	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYD	-	XC6501D141GR-G	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYD	-	XC9261A3DDER-G	DC-DC-IC	PWM/PFM step-down, 3.35V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AYE	-	XC6501D1517R-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYE	-	XC6501D151GR-G	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYE	-	XC9261A3EDER-G	DC-DC-IC	PWM/PFM step-down, 3.45V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AYF	-	XC6501D1617R-G	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYF	-	XC6501D161GR-G	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYF	-	XC9261A3FDER-G	DC-DC-IC	PWM/PFM step-down, 3.55V±2%, 1.5A, 3.0MHz, +CE	USP-6C	49s3	DC1	9a	Tor
AYH	-	XC6501D1717R-G	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYH	-	XC6501D171GR-G	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYJ	-	TPA6204A1DRB	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.7W(5V/8Ω), shutdown	DFN-8	92	AFP22	9a	Ti
AYK	-	XC6501D1817R-G	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYK	-	XC6501D181GR-G	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYL	-	XC6501D1917R-G	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYL	-	XC6501D191GR-G	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYM	-	XC6501D2017R-G	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYM	-	XC6501D201GR-G	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYN	-	TPA6211A1DRB	Lin-IC	AF PA, BTL, 2.5..5.5V, 3.2W(5V/3Ω), shutdown	DFN-8	92	AFP22	9a	Ti
AYN	-	XC6501D2117R-G	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYN	-	XC6501D211GR-G	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYP	-	XC6501D2217R-G	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYP	-	XC6501D221GR-G	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYR	-	XC6501D2317R-G	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYR	-	XC6501D231GR-G	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYS	-	XC6501D2417R-G	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYS	-	XC6501D241GR-G	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYT	-	XC6501D2517R-G	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYT	-	XC6501D251GR-G	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYU	-	XC6501D2617R-G	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYU	-	XC6501D261GR-G	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYV	-	XC6501D2717R-G	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYV	-	XC6501D271GR-G	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYX	-	XC6501D2817R-G	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYX	-	XC6501D281GR-G	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYY	-	XC6501D2917R-G	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYY	-	XC6501D291GR-G	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor
AYZ	-	XC6501D3017R-G	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL, PDR	USPN-4	58vm	VR4	9h	Tor
AYZ	-	XC6501D301GR-G	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL, PDR	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
AZ	-	XC6221A30B7R	LVR-IC	LDO, 3.05V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
AZ	-	XC6223C39B9R-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
AZ	-	XC6504A3917R-G	LVR-IC	LDO, 3.9V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
AZ	-	XC9244A37C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
AZ08	-	RP504L081A	DC-DC-IC	PWM/VFM st-dwn, 0.8V±18mV, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ09	-	RP504L091A	DC-DC-IC	PWM/VFM st-dwn, 0.9V±18mV, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ10	-	RP504L101A	DC-DC-IC	PWM/VFM st-dwn, 1.0V±18mV, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ11	-	RP504L111A	DC-DC-IC	PWM/VFM st-dwn, 1.1V±18mV, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ12	-	RP504L121A	DC-DC-IC	PWM/VFM st-dwn, 1.2V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ13	-	RP504L131A	DC-DC-IC	PWM/VFM st-dwn, 1.3V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ14	-	RP504L141A	DC-DC-IC	PWM/VFM st-dwn, 1.4V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ15	-	RP504L151A	DC-DC-IC	PWM/VFM st-dwn, 1.5V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ16	-	RP504L161A	DC-DC-IC	PWM/VFM st-dwn, 1.6V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ17	-	RP504L171A	DC-DC-IC	PWM/VFM st-dwn, 1.7V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ18	-	RP504L181A	DC-DC-IC	PWM/VFM st-dwn, 1.8V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ19	-	RP504L191A	DC-DC-IC	PWM/VFM st-dwn, 1.9V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ20	-	RP504L201A	DC-DC-IC	PWM/VFM st-dwn, 2.0V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ21	-	RP504L211A	DC-DC-IC	PWM/VFM st-dwn, 2.1V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ22	-	RP504L221A	DC-DC-IC	PWM/VFM st-dwn, 2.2V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ23	-	RP504L231A	DC-DC-IC	PWM/VFM st-dwn, 2.3V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ24	-	RP504L241A	DC-DC-IC	PWM/VFM st-dwn, 2.4V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ25	-	RP504L251A	DC-DC-IC	PWM/VFM st-dwn, 2.5V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ26	-	RP504L261A	DC-DC-IC	PWM/VFM st-dwn, 2.6V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ27	-	RP504L271A	DC-DC-IC	PWM/VFM st-dwn, 2.7V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ28	-	RP504L281A	DC-DC-IC	PWM/VFM st-dwn, 2.8V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ29	-	RP504L291A	DC-DC-IC	PWM/VFM st-dwn, 2.9V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ30	-	RP504L301A	DC-DC-IC	PWM/VFM st-dwn, 3.0V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ31	-	RP504L311A	DC-DC-IC	PWM/VFM st-dwn, 3.1V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ32	-	RP504L321A	DC-DC-IC	PWM/VFM st-dwn, 3.2V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZ33	-	RP504L331A	DC-DC-IC	PWM/VFM st-dwn, 3.3V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1616-6B	79e4	DC8	9b	Ric
AZB	-	XC6501P121HR-G	LVR-IC	LDO, 1.2V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZC	-	XC6501P131HR-G	LVR-IC	LDO, 1.3V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZD	-	XC6501P141HR-G	LVR-IC	LDO, 1.4V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZE	-	XC6501P151HR-G	LVR-IC	LDO, 1.5V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZF	-	XC6501P161HR-G	LVR-IC	LDO, 1.6V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZH	-	XC6501P171HR-G	LVR-IC	LDO, 1.7V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZK	-	XC6501P181HR-G	LVR-IC	LDO, 1.8V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZL	-	XC6501P191HR-G	LVR-IC	LDO, 1.9V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZM	-	XC6501P201HR-G	LVR-IC	LDO, 2.0V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZN	-	XC6501P211HR-G	LVR-IC	LDO, 2.1V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZP	-	XC6501P221HR-G	LVR-IC	LDO, 2.2V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZR	-	XC6501P231HR-G	LVR-IC	LDO, 2.3V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZS	-	XC6501P241HR-G	LVR-IC	LDO, 2.4V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZT	-	XC6501P251HR-G	LVR-IC	LDO, 2.5V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZU	-	XC6501P261HR-G	LVR-IC	LDO, 2.6V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZV	-	XC6501P271HR-G	LVR-IC	LDO, 2.7V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZX	-	XC6501P281HR-G	LVR-IC	LDO, 2.8V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZY	-	XC6501P291HR-G	LVR-IC	LDO, 2.9V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
AZZ	-	XC6501P301HR-G	LVR-IC	LDO, 3.0V±1%, 200mA	USP-3	17vj	VR1	9a	Tor
b	-	CH3904T1PT	Si-npn	AF, Sw, 40V, 200mA, B=100..300, 300MHz	FBPT-523	17ta	-	9a	Chm
B	-	UNRL113	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=47k/47k	ML4	31tm	-	2b	Pan
B	-	UNRL213	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=47k/47k	ML4	31tm	-	2b	Pan
B0	-	EUA4990H	Lin-IC	AF PA, BTL, 3..5.5V, 1.36W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Eut
B0	-	R3118K161A	Vdet-IC	1.6V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
B0	-	XC6504A4017R-G	LVR-IC	LDO, 4.0V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
B0	-	XC6GC1002HR	Vdet-IC	1.0V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
B0	-	XC9244A0LC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 0.85V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
B03	-	XC61GC1002HR	Vdet-IC	1.0V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
B0A	-	XC6108C10AGR	Vdet-IC	1.0V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B0B	-	XC6108C10BGR	Vdet-IC	1.0V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B0C	-	XC6108C10CGR	Vdet-IC	1.0V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B0D	-	XC6108C10DGR	Vdet-IC	1.0V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B1	-	BZX884-C2V4	Z-diode	2.4V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
B1	-	R3118K171A	Vdet-IC	1.7V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
B1	-	TS4601BEIJT	Lin-IC	AF PA, 1.8..4.5V, 2x75mW(4V/16Ω), stand-by, I2C	BGA-16	39	-	9p	Ste
B1	-	XC6504A4117R-G	LVR-IC	LDO, 4.1V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
B1	-	XC6GC1102HR	Vdet-IC	1.1V±2%, +Reset ODO	USP-3	17vdc	VD3	9b	Tor
B1	-	XC9244A0MC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 0.95V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
B13	-	XC61GC1102HR	Vdet-IC	1.1V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
B1A	-	XC6108C11AGR	Vdet-IC	1.1V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B1B	-	XC6108C11BGR	Vdet-IC	1.1V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B1C	-	XC6108C11CGR	Vdet-IC	1.1V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B1D	-	XC6108C11DGR	Vdet-IC	1.1V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B2	-	BZX884-C2V7	Z-diode	2.7V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
B2	-	R3118K181A	Vdet-IC	1.8V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
B2	-	RT9013-12PQW	LVR-IC	LDO, 1.2V±2%, 500mA, +CE	WDFN-6	49xu	VR4	9a	Rct
B2	-	XC6223D12B9R-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
B2	-	XC6504A4217R-G	LVR-IC	LDO, 4.2V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
B2	-	XC6GC1202HR	Vdet-IC	1.2V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
B2	-	XC9244A1AC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.05V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
B2173G	-	TB2173FTG	Lin-IC	AF PA, 2.5..5.5V, 2x9.5mW(3V/32Ω)	QFN-44	38	-	9m	Tos
B23	-	XC61GC1202HR	Vdet-IC	1.2V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
B26	-	TB2140FTG	Lin-IC	AF PA, 1.8.5.3.6V, 2x30mW(5V/32Ω), shutdown	QFN-16	38	-	9m	Tos
B2A	-	XC6108C12AGR	Vdet-IC	1.2V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B2B	-	XC6108C12BGR	Vdet-IC	1.2V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B2C	-	XC6108C12CGR	Vdet-IC	1.2V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B2D	-	XC6108C12DGR	Vdet-IC	1.2V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B3	-	BZX884-C3V0	Z-diode	3V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
B3	-	R3118K191A	Vdet-IC	1.9V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
B3	-	RT9013-15PQW	LVR-IC	LDO, 1.5V±2%, 500mA, +CE	WDFN-6	49xu	VR4	9a	Rct
B3	-	XC6223D13B9R-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
B3	-	XC6504A4317R-G	LVR-IC	LDO, 4.3V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
B3	-	XC6GC1302HR	Vdet-IC	1.3V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
B3	-	XC9244A1BC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.15V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
B33	-	XC61GC1302HR	Vdet-IC	1.3V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
B3A	-	XC6108C13AGR	Vdet-IC	1.3V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B3B	-	XC6108C13BGR	Vdet-IC	1.3V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B3C	-	XC6108C13CGR	Vdet-IC	1.3V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B3D	-	XC6108C13DGR	Vdet-IC	1.3V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B4	-	BZX884-C3V3	Z-diode	3.3V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
B4	-	LM4667ITL	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 1.3W(5V/8Ω), shutdown	BGA-9	39	AFP52	9a	Nsc
B4	-	R3118K201A	Vdet-IC	2.0V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
B4	-	RT9013-18PQW	LVR-IC	LDO, 1.8V±2%, 500mA, +CE	WDFN-6	49xu	VR4	9a	Rct
B4	-	RT9013B-30GQWC	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	WDFN-6	49xu	VR4	9a	Rct
B4	-	XC6223D14B9R-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
B4	-	XC6504A4417R-G	LVR-IC	LDO, 4.4V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
B4	-	XC6GC1402HR	Vdet-IC	1.4V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
B4	-	XC9244A1CC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.25V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
B43	-	XC61GC1402HR	Vdet-IC	1.4V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
B4A	-	XC6108C14AGR	Vdet-IC	1.4V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B4B	-	XC6108C14BGR	Vdet-IC	1.4V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B4C	-	XC6108C14CGR	Vdet-IC	1.4V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B4D	-	XC6108C14DGR	Vdet-IC	1.4V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B5	-	74AVC1T45GM	CMOS-Log	Dual supply translating transceiver with 3-state output	SOT886	57	Log70	9z	Nxp
B5	-	BZX884-C3V6	Z-diode	3.6V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
B5	-	R3118K211A	Vdet-IC	2.1V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
B5	-	RT9013-1HPQW	LVR-IC	LDO, 1.85V±2%, 500mA, +CE	WDFN-6	49xu	VR4	9a	Rct
B5	-	XC6223D15B9R-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
B5	-	XC6504A4517R-G	LVR-IC	LDO, 4.5V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
B5	-	XC6GC1502HR	Vdet-IC	1.5V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
B5	-	XC9244A1DC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.35V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
B53	-	XC61GC1502HR	Vdet-IC	1.5V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
B55	-	TS4855IJT	Lin-IC	AF PA, BTL, 3..5.5V, 1W(8Ω)+2x25mW(32Ω), digital volume	BGA-18	39	-	9a	Ste
B5A	-	XC6108C15AGR	Vdet-IC	1.5V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B5B	-	XC6108C15BGR	Vdet-IC	1.5V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B5C	-	XC6108C15CGR	Vdet-IC	1.5V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B5D	-	XC6108C15DGR	Vdet-IC	1.5V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B6	-	BZX884-C3V9	Z-diode	3.9V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
B6	-	R3118K221A	Vdet-IC	2.2V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
B6	-	RT9013-25PQW	LVR-IC	LDO, 2.5V±2%, 500mA, +CE	WDFN-6	49xu	VR4	9a	Rct
B6	-	XC6223D16B9R-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
B6	-	XC6504A4617R-G	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
B6	-	XC6GC1602HR	Vdet-IC	1.6V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
B6	-	XC9244A1EC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.45V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
B63	-	XC61GC1602HR	Vdet-IC	1.6V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
B6A	-	XC6108C16AGR	Vdet-IC	1.6V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B6B	-	XC6108C16BGR	Vdet-IC	1.6V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B6C	-	XC6108C16CGR	Vdet-IC	1.6V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B6D	-	XC6108C16DGR	Vdet-IC	1.6V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B7	-	ASB0240BD	Si-diode	SBR, 40V, 200mA, Vf<0.45V(200mA)	0603	13d	-	2b	Ana

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B7	-	ASB0240BF	Si-diode	SBR, 40V, 200mA, Vf<0.45V(200mA)	1005	13d	-	2b	Ana
B7	-	BZX884-C4V3	Z-diode	4.3V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
B7	-	LM4856ITL	Lin-IC	AF PA, BTL, 2.6..5.5V, 1.1W(8Ω)+2x60mW(32Ω), I2C	BGA-18	39	-	9a	Nsc
B7	-	R3118K231A	Vdet-IC	2.3V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
B7	-	RT9013-28PQW	LVR-IC	LDO, 2.8V±2%, 500mA, +CE	WDFN-6	49xu	VR4	9a	Rct
B7	-	XC6223D17B9R-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
B7	-	XC6504A4717R-G	LVR-IC	LDO, 4.7V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
B7	-	XC6GC1702HR	Vdet-IC	1.7V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
B7	-	XC9244A1FC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.55V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
B73	-	XC61GC1702HR	Vdet-IC	1.7V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
B7A	-	XC6108C17AGR	Vdet-IC	1.7V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B7B	-	XC6108C17BGR	Vdet-IC	1.7V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B7C	-	XC6108C17CGR	Vdet-IC	1.7V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B7D	-	XC6108C17DGR	Vdet-IC	1.7V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B8	-	BZX884-C4V7	Z-diode	4.7V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
B8	-	LM4852ITL	Lin-IC	AF PA, BTL, 2.6..5.5V, 1.1W(8Ω)+2x60mW(32Ω), I2C	BGA-18	39	-	9a	Nsc
B8	-	R3118K241A	Vdet-IC	2.4V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
B8	-	RT9013-2HPQW	LVR-IC	LDO, 2.85V±2%, 500mA, +CE	WDFN-6	49xu	VR4	9a	Rct
B8	-	XC6223D18B9R-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
B8	-	XC6504A4817R-G	LVR-IC	LDO, 4.8V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
B8	-	XC6GC1802HR	Vdet-IC	1.8V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
B8	-	XC9244A1HC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.65V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
B83	-	XC61GC1802HR	Vdet-IC	1.8V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
B8A	-	XC6108C18AGR	Vdet-IC	1.8V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B8B	-	XC6108C18BGR	Vdet-IC	1.8V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B8C	-	XC6108C18CGR	Vdet-IC	1.8V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B8D	-	XC6108C18DGR	Vdet-IC	1.8V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B9	-	BZX884-C5V1	Z-diode	5.1V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
B9	-	LM4921ITL	Lin-IC	Dual 16-bit stereo DAC, AF PA, 2.6..5.5V, 2x60mW(32Ω), I2C	BGA-20	39	-	9a	Nsc
B9	-	R3118K251A	Vdet-IC	2.5V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
B9	-	RT9013-30PQW	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	WDFN-6	49xu	VR4	9a	Rct
B9	-	XC6223D19B9R-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
B9	-	XC6504A4917R-G	LVR-IC	LDO, 4.9V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
B9	-	XC6GC1902HR	Vdet-IC	1.9V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
B9	-	XC9244A1KC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.75V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
B93	-	XC61GC1902HR	Vdet-IC	1.9V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
B9A	-	XC6108C19AGR	Vdet-IC	1.9V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B9B	-	XC6108C19BGR	Vdet-IC	1.9V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
B9C	-	XC6108C19CGR	Vdet-IC	1.9V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
B9D	-	XC6108C19DGR	Vdet-IC	1.9V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
BA	-	BZX884-C5V6	Z-diode	5.6V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
BA	-	RP104K121C	LVR-IC	LDO, 1.2V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BA	-	RP105K061D	LVR-IC	LDO, 0.6V±15mV, 400mA, +CE, CL	DFN1212-6	52zd	VR11	9a	Ric
BA	-	RT9013-33PQW	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	WDFN-6	49xu	VR4	9a	Rct
BA	-	SiP21106DVP-12-E3	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	TSC75-6L	91ub	VR7	9m	Vs
BA	-	XC6223D20B9R-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BA	-	XC6504A5017R-G	LVR-IC	LDO, 5.0V±1%, 150mA, +CE	USPN-4B02	26vm	VR4	9aa	Tor
BA	-	XC9244A1LC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.85V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BA01	-	RP153L001A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA02	-	RP153L002A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA03	-	RP153L003A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA04	-	RP153L004A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA05	-	RP153L005A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA06	-	RP153L006A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA07	-	RP153L007A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA08	-	RP153L008A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA09	-	RP153L009A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA096	mk	XC9216A096D	DC-DC-IC	PWM/PFM st-dwn, 0.9V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA09C	mk	XC9216A09CD	DC-DC-IC	PWM/PFM st-dwn, 0.9V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA10	-	RP153L010A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA106	mk	XC9216A106D	DC-DC-IC	PWM/PFM st-dwn, 1.0V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA10C	mk	XC9216A10CD	DC-DC-IC	PWM/PFM st-dwn, 1.0V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA11	-	RP153L011A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA116	-	XC6114A116ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA116	mk	XC9216A116D	DC-DC-IC	PWM/PFM st-dwn, 1.1V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA117	-	XC6114A117ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA118	-	XC6114A118ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA119	-	XC6114A119ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA11C	mk	XC9216A11CD	DC-DC-IC	PWM/PFM st-dwn, 1.1V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA12	-	RP153L012A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BA120	-	XC6114A120ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA121	-	XC6114A121ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA122	-	XC6114A122ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA123	-	XC6114A123ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA124	-	XC6114A124ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA125	-	XC6114A125ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA126	-	XC6114A126ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA126	mk	XC9216A126D	DC-DC-IC	PWM/PFM st-dwn, 1.2V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA127	-	XC6114A127ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA128	-	XC6114A128ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA129	-	XC6114A129ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA12C	mk	XC9216A12CD	DC-DC-IC	PWM/PFM st-dwn, 1.2V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA13	-	RP153L013A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA130	-	XC6114A130ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA131	-	XC6114A131ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA132	-	XC6114A132ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA133	-	XC6114A133ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA134	-	XC6114A134ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA135	-	XC6114A135ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA136	-	XC6114A136ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA136	mk	XC9216A136D	DC-DC-IC	PWM/PFM st-dwn, 1.3V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA137	-	XC6114A137ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA138	-	XC6114A138ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA139	-	XC6114A139ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA13C	mk	XC9216A13CD	DC-DC-IC	PWM/PFM st-dwn, 1.3V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA14	-	RP153L014A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA140	-	XC6114A140ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA141	-	XC6114A141ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA142	-	XC6114A142ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA143	-	XC6114A143ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA144	-	XC6114A144ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA145	-	XC6114A145ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA146	-	XC6114A146ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA146	mk	XC9216A146D	DC-DC-IC	PWM/PFM st-dwn, 1.4V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA147	-	XC6114A147ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA148	-	XC6114A148ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA149	-	XC6114A149ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA14C	mk	XC9216A14CD	DC-DC-IC	PWM/PFM st-dwn, 1.4V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA15	-	RP153L015A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA150	-	XC6114A150ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA156	mk	XC9216A156D	DC-DC-IC	PWM/PFM st-dwn, 1.5V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA15C	mk	XC9216A15CD	DC-DC-IC	PWM/PFM st-dwn, 1.5V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA16	-	RP153L016A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA166	mk	XC9216A166D	DC-DC-IC	PWM/PFM st-dwn, 1.6V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA16C	mk	XC9216A16CD	DC-DC-IC	PWM/PFM st-dwn, 1.6V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA17	-	RP153L017A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA176	mk	XC9216A176D	DC-DC-IC	PWM/PFM st-dwn, 1.7V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA17C	mk	XC9216A17CD	DC-DC-IC	PWM/PFM st-dwn, 1.7V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA18	-	RP153L018A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA186	mk	XC9216A186D	DC-DC-IC	PWM/PFM st-dwn, 1.8V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA18C	mk	XC9216A18CD	DC-DC-IC	PWM/PFM st-dwn, 1.8V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA19	-	RP153L019A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA196	mk	XC9216A196D	DC-DC-IC	PWM/PFM st-dwn, 1.9V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA19C	mk	XC9216A19CD	DC-DC-IC	PWM/PFM st-dwn, 1.9V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA20	-	RP153L020A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA206	mk	XC9216A206D	DC-DC-IC	PWM/PFM st-dwn, 2.0V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA20C	mk	XC9216A20CD	DC-DC-IC	PWM/PFM st-dwn, 2.0V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA21	-	RP153L021A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA216	-	XC6114A216ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA216	mk	XC9216A216D	DC-DC-IC	PWM/PFM st-dwn, 2.1V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA217	-	XC6114A217ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA218	-	XC6114A218ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA219	-	XC6114A219ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA21C	mk	XC9216A21CD	DC-DC-IC	PWM/PFM st-dwn, 2.1V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA22	-	RP153L022A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA220	-	XC6114A220ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA221	-	XC6114A221ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA222	-	XC6114A222ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA223	-	XC6114A223ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA224	-	XC6114A224ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BA225	-	XC6114A225ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA226	-	XC6114A226ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA226	mk	XC9216A226D	DC-DC-IC	PWM/PFM st-dwn, 2.2V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA227	-	XC6114A227ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA228	-	XC6114A228ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA229	-	XC6114A229ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA22C	mk	XC9216A22CD	DC-DC-IC	PWM/PFM st-dwn, 2.2V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA23	-	RP153L023A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA230	-	XC6114A230ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA231	-	XC6114A231ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA232	-	XC6114A232ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA233	-	XC6114A233ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA234	-	XC6114A234ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA235	-	XC6114A235ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA236	-	XC6114A236ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA236	mk	XC9216A236D	DC-DC-IC	PWM/PFM st-dwn, 2.3V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA237	-	XC6114A237ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA238	-	XC6114A238ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA239	-	XC6114A239ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA23C	mk	XC9216A23CD	DC-DC-IC	PWM/PFM st-dwn, 2.3V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA24	-	RP153L024A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA240	-	XC6114A240ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA241	-	XC6114A241ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA242	-	XC6114A242ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA243	-	XC6114A243ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA244	-	XC6114A244ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA245	-	XC6114A245ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA246	-	XC6114A246ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA246	mk	XC9216A246D	DC-DC-IC	PWM/PFM st-dwn, 2.4V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA247	-	XC6114A247ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA248	-	XC6114A248ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA249	-	XC6114A249ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA24C	mk	XC9216A24CD	DC-DC-IC	PWM/PFM st-dwn, 2.4V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA25	-	RP153L025A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA250	-	XC6114A250ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA256	mk	XC9216A256D	DC-DC-IC	PWM/PFM st-dwn, 2.5V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA25C	mk	XC9216A25CD	DC-DC-IC	PWM/PFM st-dwn, 2.5V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA26	-	RP153L026A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA266	mk	XC9216A266D	DC-DC-IC	PWM/PFM st-dwn, 2.6V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA26C	mk	XC9216A26CD	DC-DC-IC	PWM/PFM st-dwn, 2.6V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA27	-	RP153L027A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA276	mk	XC9216A276D	DC-DC-IC	PWM/PFM st-dwn, 2.7V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA27C	mk	XC9216A27CD	DC-DC-IC	PWM/PFM st-dwn, 2.7V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA28	-	RP153L028A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA286	mk	XC9216A286D	DC-DC-IC	PWM/PFM st-dwn, 2.8V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA28C	mk	XC9216A28CD	DC-DC-IC	PWM/PFM st-dwn, 2.8V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA29	-	RP153L029A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA296	mk	XC9216A296D	DC-DC-IC	PWM/PFM st-dwn, 2.9V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA29C	mk	XC9216A29CD	DC-DC-IC	PWM/PFM st-dwn, 2.9V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA30	-	RP153L030A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA306	mk	XC9216A306D	DC-DC-IC	PWM/PFM st-dwn, 3.0V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA30C	mk	XC9216A30CD	DC-DC-IC	PWM/PFM st-dwn, 3.0V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA31	-	RP153L031A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA316	-	XC6114A316ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA316	mk	XC9216A316D	DC-DC-IC	PWM/PFM st-dwn, 3.1V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA317	-	XC6114A317ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA318	-	XC6114A318ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA319	-	XC6114A319ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA31C	mk	XC9216A31CD	DC-DC-IC	PWM/PFM st-dwn, 3.1V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA32	-	RP153L032A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA320	-	XC6114A320ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA321	-	XC6114A321ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA322	-	XC6114A322ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA323	-	XC6114A323ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA324	-	XC6114A324ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA325	-	XC6114A325ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA326	-	XC6114A326ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA326	mk	XC9216A326D	DC-DC-IC	PWM/PFM st-dwn, 3.2V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA327	-	XC6114A327ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA328	-	XC6114A328ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BA329	-	XC6114A329ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA32C	mk	XC9216A32CD	DC-DC-IC	PWM/PFM st-dwn, 3.2V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA33	-	RP153L033A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA330	-	XC6114A330ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA331	-	XC6114A331ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA332	-	XC6114A332ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA333	-	XC6114A333ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA334	-	XC6114A334ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA335	-	XC6114A335ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA336	-	XC6114A336ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA336	mk	XC9216A336D	DC-DC-IC	PWM/PFM st-dwn, 3.3V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA337	-	XC6114A337ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA338	-	XC6114A338ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA339	-	XC6114A339ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA33C	mk	XC9216A33CD	DC-DC-IC	PWM/PFM st-dwn, 3.3V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA34	-	RP153L034A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA340	-	XC6114A340ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA341	-	XC6114A341ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA342	-	XC6114A342ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA343	-	XC6114A343ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA344	-	XC6114A344ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA345	-	XC6114A345ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA346	-	XC6114A346ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA346	mk	XC9216A346D	DC-DC-IC	PWM/PFM st-dwn, 3.4V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA347	-	XC6114A347ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA348	-	XC6114A348ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA349	-	XC6114A349ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA34C	mk	XC9216A34CD	DC-DC-IC	PWM/PFM st-dwn, 3.4V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA35	-	RP153L035A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA350	-	XC6114A350ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA356	mk	XC9216A356D	DC-DC-IC	PWM/PFM st-dwn, 3.5V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA35C	mk	XC9216A35CD	DC-DC-IC	PWM/PFM st-dwn, 3.5V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA36	-	RP153L036A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA366	mk	XC9216A366D	DC-DC-IC	PWM/PFM st-dwn, 3.6V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA36C	mk	XC9216A36CD	DC-DC-IC	PWM/PFM st-dwn, 3.6V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA37	-	RP153L037A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA376	mk	XC9216A376D	DC-DC-IC	PWM/PFM st-dwn, 3.7V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA37C	mk	XC9216A37CD	DC-DC-IC	PWM/PFM st-dwn, 3.7V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA38	-	RP153L038A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA386	mk	XC9216A386D	DC-DC-IC	PWM/PFM st-dwn, 3.8V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA38C	mk	XC9216A38CD	DC-DC-IC	PWM/PFM st-dwn, 3.8V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA39	-	RP153L039A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA396	mk	XC9216A396D	DC-DC-IC	PWM/PFM st-dwn, 3.9V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA39C	mk	XC9216A39CD	DC-DC-IC	PWM/PFM st-dwn, 3.9V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA40	-	RP153L040A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA406	mk	XC9216A406D	DC-DC-IC	PWM/PFM st-dwn, 4.0V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA40C	mk	XC9216A40CD	DC-DC-IC	PWM/PFM st-dwn, 4.0V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
BA41	-	RP153L041A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA416	-	XC6114A416ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA417	-	XC6114A417ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA418	-	XC6114A418ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA419	-	XC6114A419ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA42	-	RP153L042A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA420	-	XC6114A420ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA421	-	XC6114A421ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA422	-	XC6114A422ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA423	-	XC6114A423ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA424	-	XC6114A424ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA425	-	XC6114A425ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA426	-	XC6114A426ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA427	-	XC6114A427ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA428	-	XC6114A428ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA429	-	XC6114A429ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA43	-	RP153L043A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA430	-	XC6114A430ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA431	-	XC6114A431ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA432	-	XC6114A432ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA433	-	XC6114A433ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA434	-	XC6114A434ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA435	-	XC6114A435ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BA436	-	XC6114A436ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA437	-	XC6114A437ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA438	-	XC6114A438ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA439	-	XC6114A439ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA44	-	RP153L044A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA440	-	XC6114A440ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA441	-	XC6114A441ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA442	-	XC6114A442ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA443	-	XC6114A443ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA444	-	XC6114A444ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA445	-	XC6114A445ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA446	-	XC6114A446ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA447	-	XC6114A447ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA448	-	XC6114A448ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA449	-	XC6114A449ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA45	-	RP153L045A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA450	-	XC6114A450ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA46	-	RP153L046A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA47	-	RP153L047A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA48	-	RP153L048A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA49	-	RP153L049A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA50	-	RP153L050A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA51	-	RP153L051A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA516	-	XC6114A516ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA517	-	XC6114A517ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA518	-	XC6114A518ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA519	-	XC6114A519ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA52	-	RP153L052A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BA520	-	XC6114A520ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA521	-	XC6114A521ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA522	-	XC6114A522ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA523	-	XC6114A523ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA524	-	XC6114A524ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA525	-	XC6114A525ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA526	-	XC6114A526ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA527	-	XC6114A527ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA528	-	XC6114A528ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA529	-	XC6114A529ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA530	-	XC6114A530ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA531	-	XC6114A531ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA532	-	XC6114A532ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA533	-	XC6114A533ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA534	-	XC6114A534ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA535	-	XC6114A535ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA536	-	XC6114A536ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA537	-	XC6114A537ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA538	-	XC6114A538ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA539	-	XC6114A539ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA540	-	XC6114A540ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA541	-	XC6114A541ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA542	-	XC6114A542ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA543	-	XC6114A543ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA544	-	XC6114A544ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA545	-	XC6114A545ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA546	-	XC6114A546ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA547	-	XC6114A547ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA548	-	XC6114A548ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA549	-	XC6114A549ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA550	-	XC6114A550ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA616	-	XC6114A616ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA617	-	XC6114A617ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA618	-	XC6114A618ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA619	-	XC6114A619ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA620	-	XC6114A620ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA621	-	XC6114A621ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA622	-	XC6114A622ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA623	-	XC6114A623ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA624	-	XC6114A624ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA625	-	XC6114A625ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA626	-	XC6114A626ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BA627	-	XC6114A627ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA628	-	XC6114A628ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA629	-	XC6114A629ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA630	-	XC6114A630ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA631	-	XC6114A631ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA632	-	XC6114A632ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA633	-	XC6114A633ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA634	-	XC6114A634ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA635	-	XC6114A635ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA636	-	XC6114A636ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA637	-	XC6114A637ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA638	-	XC6114A638ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA639	-	XC6114A639ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA640	-	XC6114A640ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA641	-	XC6114A641ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA642	-	XC6114A642ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA643	-	XC6114A643ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA644	-	XC6114A644ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA645	-	XC6114A645ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA646	-	XC6114A646ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA647	-	XC6114A647ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA648	-	XC6114A648ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA649	-	XC6114A649ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA650	-	XC6114A650ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD19	9b	Tor
BA8	-	XC9237F08C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BA8	-	XC9237F08C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BA8	-	XC9237F08CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BA8	-	XC9260B08CER-G	DC-DC-IC	PWM step-down, 0.8V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BA9	-	XC9237F09C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BA9	-	XC9237F09C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BA9	-	XC9237F09CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BA9	-	XC9260B09CER-G	DC-DC-IC	PWM step-down, 0.9V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BAA	-	TC1302BAAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BAAA	-	TC1301BAAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAAB	-	TC1301BAABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAAC	-	TC1301BAACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAAD	-	TC1301BAADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAAE	-	TC1301BAAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAAF	-	TC1301BAAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAB	-	TC1302BABVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BABA	-	TC1301BABAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BABB	-	TC1301BABBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BABC	-	TC1301BABCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BABD	-	TC1301BABDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BABE	-	TC1301BABEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BABF	-	TC1301BABFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAC	-	TC1302BACVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BACA	-	TC1301BACAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BACB	-	TC1301BACBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BACC	-	TC1301BACCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BACD	-	TC1301BACDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BACE	-	TC1301BACEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BACF	-	TC1301BACFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAD	-	TC1302BADVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BADA	-	TC1301BADAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BADB	-	TC1301BADBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BADC	-	TC1301BADCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BADD	-	TC1301BADDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BADE	-	TC1301BADEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BADF	-	TC1301BADFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAE	-	TC1302BAEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BAEA	-	TC1301BAEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAEB	-	TC1301BAEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAEC	-	TC1301BAECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAED	-	TC1301BAEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAEE	-	TC1301BAEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAEF	-	TC1301BAEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAF	-	TC1302BAFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BAFA	-	TC1301BAFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAFB	-	TC1301BAFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BAFC	-	TC1301BAFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAFD	-	TC1301BAFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAFE	-	TC1301BAFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAFF	-	TC1301BAFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAG	-	A2190ITL	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	BGA-9	39	AFP44	9s	Aot
BAG	-	BL6212TLX	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.28W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Shb
BAG	-	LR6212B	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.28W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Lrc
BAG	-	MC4990C	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Mep
BAG	-	TC1302BAGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BAGA	-	TC1301BAGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAGB	-	TC1301BAGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAGC	-	TC1301BAGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAGD	-	TC1301BAGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAGE	-	TC1301BAGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAGF	-	TC1301BAGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAH	-	TC1302BAHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BAHA	-	TC1301BAHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAHB	-	TC1301BAHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAHC	-	TC1301BAHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAHD	-	TC1301BAHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAHE	-	TC1301BAHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAHF	-	TC1301BAHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAI	-	TC1302BAIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BAIA	-	TC1301BAIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAIB	-	TC1301BAIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAIC	-	TC1301BAICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAID	-	TC1301BAIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAIE	-	TC1301BAIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAIF	-	TC1301BAIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAJ	-	TC1302BAJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BAJA	-	TC1301BAJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAJB	-	TC1301BAJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAJC	-	TC1301BAJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAJD	-	TC1301BAJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAJE	-	TC1301BAJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAJF	-	TC1301BAJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAK	-	TC1302BAKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BAKA	-	TC1301BAKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAKB	-	TC1301BAKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAKC	-	TC1301BAKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAKD	-	TC1301BAKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAKE	-	TC1301BAKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAKF	-	TC1301BAKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAL	-	TC1302BALVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BAL	-	XC9237F0LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BAL	-	XC9237F0LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BAL	-	XC9237F0LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BAL	-	XC9260B0LCER-G	DC-DC-IC	PWM step-down, 0.85V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BALA	-	TC1301BALAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BALB	-	TC1301BALBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BALC	-	TC1301BALCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BALD	-	TC1301BALDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BALE	-	TC1301BALEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BALF	-	TC1301BALFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAM	-	TC1302BAMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BAM	-	XC9237F0MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BAM	-	XC9237F0MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BAM	-	XC9237F0MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BAM	-	XC9260B0MCER-G	DC-DC-IC	PWM step-down, 0.95V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BAMA	-	TC1301BAMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAMB	-	TC1301BAMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAMC	-	TC1301BAMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAMD	-	TC1301BAMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAME	-	TC1301BAMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAMF	-	TC1301BAMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAN	-	TC1302BANVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BANA	-	TC1301BANAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BANB	-	TC1301BANBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BANC	-	TC1301BANCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAND	-	TC1301BANDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BANE	-	TC1301BANEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BANF	-	TC1301BANFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAO	-	TC1302BAOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BAOA	-	TC1301BAOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAOB	-	TC1301BAOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAOC	-	TC1301BAOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAOD	-	TC1301BAODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAOE	-	TC1301BAOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAOF	-	TC1301BAOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAP	-	TC1302BAPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BAPA	-	TC1301BAPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAPB	-	TC1301BAPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAPC	-	TC1301BAPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAPD	-	TC1301BAPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAPE	-	TC1301BAPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAPF	-	TC1301BAPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAQ	-	TC1302BAQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BAQA	-	TC1301BAQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAQB	-	TC1301BAQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAQC	-	TC1301BAQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAQD	-	TC1301BAQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAQE	-	TC1301BAQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAQF	-	TC1301BAQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAR	-	TC1302BARVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BARA	-	TC1301BARAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BARB	-	TC1301BARBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BARC	-	TC1301BARCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BARD	-	TC1301BARDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BARE	-	TC1301BAREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BARF	-	TC1301BARFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAS	-	TC1302BASVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BASA	-	TC1301BASAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BASB	-	TC1301BASBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BASC	-	TC1301BASCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BASD	-	TC1301BASDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BASE	-	TC1301BASEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BASF	-	TC1301BASFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAT	-	TC1302BATVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BATA	-	TC1301BATAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BATB	-	TC1301BATBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BATC	-	TC1301BATCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BATD	-	TC1301BATDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BATE	-	TC1301BATEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BATF	-	TC1301BATFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAU	-	TC1302BAUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BAUA	-	TC1301BAUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAUB	-	TC1301BAUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAUC	-	TC1301BAUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAUD	-	TC1301BAUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAUE	-	TC1301BAUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAUF	-	TC1301BAUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAV	-	TC1302BAVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BAVA	-	TC1301BAVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAVB	-	TC1301BAVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAVC	-	TC1301BAVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAVD	-	TC1301BAVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAVE	-	TC1301BAVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAVF	-	TC1301BAVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAW	-	TC1302BAWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BAWA	-	TC1301BAWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAWB	-	TC1301BAWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAWC	-	TC1301BAWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAWD	-	TC1301BAWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAWE	-	TC1301BAWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAWF	-	TC1301BAWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BAY	-	XC6119C08A7R	Vdet-IC	0.8V±30mV, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BAZ	-	XC6119C09A7R	Vdet-IC	0.9V±30mV, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BB	-	BZX884-C6V2	Z-diode	6.2V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
BB	-	RP104K131C	LVR-IC	LDO, 1.3V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BB	-	RP105K071D	LVR-IC	LDO, 0.7V±15mV, 400mA, +CE, CL	DFN1212-6	52zd	VR11	9a	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BB	-	RT9193-18PQW	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
BB	-	XC6221B1217R	LVR-IC	LDO, 1.2V±20mV, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BB	-	XC6223D21B9R-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BB	-	XC9244A1MC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.95V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BB0	-	XC9237F10C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BB0	-	XC9237F10C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BB0	-	XC9237F10CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BB0	-	XC9260B10CER-G	DC-DC-IC	PWM step-down, 1.0V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BB02	-	RP153L002B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB03	-	RP153L003B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB04	-	RP153L004B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB05	-	RP153L005B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB06	-	RP153L006B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB07	-	RP153L007B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB08	-	RP153L008B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB09	-	RP153L009B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB096	mk	XC9216B096D	DC-DC-IC	PWM/PFM st-dwn, 0.9V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB09C	mk	XC9216B09CD	DC-DC-IC	PWM/PFM st-dwn, 0.9V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB1	-	XC9237F11C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BB1	-	XC9237F11C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BB1	-	XC9237F11CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BB1	-	XC9260B11CER-G	DC-DC-IC	PWM step-down, 1.1V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BB10	-	RP153L010B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB106	mk	XC9216B106D	DC-DC-IC	PWM/PFM st-dwn, 1.0V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB10C	mk	XC9216B10CD	DC-DC-IC	PWM/PFM st-dwn, 1.0V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB11	-	RP153L011B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB116	mk	XC9216B116D	DC-DC-IC	PWM/PFM st-dwn, 1.1V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB11C	mk	XC9216B11CD	DC-DC-IC	PWM/PFM st-dwn, 1.1V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB12	-	RP153L012B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB126	mk	XC9216B126D	DC-DC-IC	PWM/PFM st-dwn, 1.2V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB12C	mk	XC9216B12CD	DC-DC-IC	PWM/PFM st-dwn, 1.2V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB13	-	RP153L013B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB136	mk	XC9216B136D	DC-DC-IC	PWM/PFM st-dwn, 1.3V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB13C	mk	XC9216B13CD	DC-DC-IC	PWM/PFM st-dwn, 1.3V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB14	-	RP153L014B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB146	mk	XC9216B146D	DC-DC-IC	PWM/PFM st-dwn, 1.4V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB14C	mk	XC9216B14CD	DC-DC-IC	PWM/PFM st-dwn, 1.4V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB15	-	RP153L015B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB156	mk	XC9216B156D	DC-DC-IC	PWM/PFM st-dwn, 1.5V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB15C	mk	XC9216B15CD	DC-DC-IC	PWM/PFM st-dwn, 1.5V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB16	-	RP153L016B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB166	mk	XC9216B166D	DC-DC-IC	PWM/PFM st-dwn, 1.6V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB16C	mk	XC9216B16CD	DC-DC-IC	PWM/PFM st-dwn, 1.6V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB17	-	RP153L017B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB176	mk	XC9216B176D	DC-DC-IC	PWM/PFM st-dwn, 1.7V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB17C	mk	XC9216B17CD	DC-DC-IC	PWM/PFM st-dwn, 1.7V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB18	-	RP153L018B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB186	mk	XC9216B186D	DC-DC-IC	PWM/PFM st-dwn, 1.8V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB18C	mk	XC9216B18CD	DC-DC-IC	PWM/PFM st-dwn, 1.8V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB19	-	RP153L019B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB196	mk	XC9216B196D	DC-DC-IC	PWM/PFM st-dwn, 1.9V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB19C	mk	XC9216B19CD	DC-DC-IC	PWM/PFM st-dwn, 1.9V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB2	-	XC9237F12C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BB2	-	XC9237F12C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BB2	-	XC9237F12CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BB2	-	XC9260B12CER-G	DC-DC-IC	PWM step-down, 1.2V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BB20	-	RP153L020B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB206	mk	XC9216B206D	DC-DC-IC	PWM/PFM st-dwn, 2.0V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB20C	mk	XC9216B20CD	DC-DC-IC	PWM/PFM st-dwn, 2.0V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB21	-	RP153L021B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB216	-	XC6114B216ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB216	mk	XC9216B216D	DC-DC-IC	PWM/PFM st-dwn, 2.1V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB217	-	XC6114B217ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB218	-	XC6114B218ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB219	-	XC6114B219ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB21C	mk	XC9216B21CD	DC-DC-IC	PWM/PFM st-dwn, 2.1V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB22	-	RP153L022B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB220	-	XC6114B220ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB221	-	XC6114B221ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB222	-	XC6114B222ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BB223	-	XC6114B223ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB224	-	XC6114B224ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB225	-	XC6114B225ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB226	-	XC6114B226ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB226	mk	XC9216B226D	DC-DC-IC	PWM/PFM st-dwn, 2.2V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB227	-	XC6114B227ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB228	-	XC6114B228ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB229	-	XC6114B229ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB22C	mk	XC9216B22CD	DC-DC-IC	PWM/PFM st-dwn, 2.2V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB23	-	RP153L023B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB230	-	XC6114B230ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB231	-	XC6114B231ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB232	-	XC6114B232ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB233	-	XC6114B233ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB234	-	XC6114B234ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB235	-	XC6114B235ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB236	-	XC6114B236ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB236	mk	XC9216B236D	DC-DC-IC	PWM/PFM st-dwn, 2.3V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB237	-	XC6114B237ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB238	-	XC6114B238ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB239	-	XC6114B239ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB23C	mk	XC9216B23CD	DC-DC-IC	PWM/PFM st-dwn, 2.3V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB24	-	RP153L024B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB240	-	XC6114B240ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB241	-	XC6114B241ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB242	-	XC6114B242ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB243	-	XC6114B243ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB244	-	XC6114B244ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB245	-	XC6114B245ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB246	-	XC6114B246ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB246	mk	XC9216B246D	DC-DC-IC	PWM/PFM st-dwn, 2.4V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB247	-	XC6114B247ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB248	-	XC6114B248ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB249	-	XC6114B249ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB24C	mk	XC9216B24CD	DC-DC-IC	PWM/PFM st-dwn, 2.4V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB25	-	RP153L025B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB250	-	XC6114B250ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB256	mk	XC9216B256D	DC-DC-IC	PWM/PFM st-dwn, 2.5V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB25C	mk	XC9216B25CD	DC-DC-IC	PWM/PFM st-dwn, 2.5V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB26	-	RP153L026B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB266	mk	XC9216B266D	DC-DC-IC	PWM/PFM st-dwn, 2.6V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB26C	mk	XC9216B26CD	DC-DC-IC	PWM/PFM st-dwn, 2.6V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB27	-	RP153L027B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB276	mk	XC9216B276D	DC-DC-IC	PWM/PFM st-dwn, 2.7V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB27C	mk	XC9216B27CD	DC-DC-IC	PWM/PFM st-dwn, 2.7V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB28	-	RP153L028B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB286	mk	XC9216B286D	DC-DC-IC	PWM/PFM st-dwn, 2.8V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB28C	mk	XC9216B28CD	DC-DC-IC	PWM/PFM st-dwn, 2.8V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB29	-	RP153L029B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB296	mk	XC9216B296D	DC-DC-IC	PWM/PFM st-dwn, 2.9V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB29C	mk	XC9216B29CD	DC-DC-IC	PWM/PFM st-dwn, 2.9V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB3	-	XC9237F13C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BB3	-	XC9237F13C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BB3	-	XC9237F13CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BB3	-	XC9260B13CER-G	DC-DC-IC	PWM step-down, 1.3V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BB30	-	RP153L030B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB306	mk	XC9216B306D	DC-DC-IC	PWM/PFM st-dwn, 3.0V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB30C	mk	XC9216B30CD	DC-DC-IC	PWM/PFM st-dwn, 3.0V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB31	-	RP153L031B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB316	-	XC6114B316ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB316	mk	XC9216B316D	DC-DC-IC	PWM/PFM st-dwn, 3.1V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB317	-	XC6114B317ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB318	-	XC6114B318ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB319	-	XC6114B319ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB31C	mk	XC9216B31CD	DC-DC-IC	PWM/PFM st-dwn, 3.1V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB32	-	RP153L032B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB320	-	XC6114B320ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB321	-	XC6114B321ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB322	-	XC6114B322ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB323	-	XC6114B323ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BB324	-	XC6114B324ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB325	-	XC6114B325ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB326	-	XC6114B326ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB326	mk	XC9216B326D	DC-DC-IC	PWM/PFM st-dwn, 3.2V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB327	-	XC6114B327ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB328	-	XC6114B328ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB329	-	XC6114B329ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB32C	mk	XC9216B32CD	DC-DC-IC	PWM/PFM st-dwn, 3.2V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB33	-	RP153L033B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB330	-	XC6114B330ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB331	-	XC6114B331ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB332	-	XC6114B332ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB333	-	XC6114B333ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB334	-	XC6114B334ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB335	-	XC6114B335ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB336	-	XC6114B336ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB336	mk	XC9216B336D	DC-DC-IC	PWM/PFM st-dwn, 3.3V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB337	-	XC6114B337ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB338	-	XC6114B338ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB339	-	XC6114B339ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB33C	mk	XC9216B33CD	DC-DC-IC	PWM/PFM st-dwn, 3.3V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB34	-	RP153L034B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB340	-	XC6114B340ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB341	-	XC6114B341ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB342	-	XC6114B342ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB343	-	XC6114B343ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB344	-	XC6114B344ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB345	-	XC6114B345ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB346	-	XC6114B346ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB346	mk	XC9216B346D	DC-DC-IC	PWM/PFM st-dwn, 3.4V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB347	-	XC6114B347ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB348	-	XC6114B348ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB349	-	XC6114B349ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB34C	mk	XC9216B34CD	DC-DC-IC	PWM/PFM st-dwn, 3.4V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB35	-	RP153L035B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB350	-	XC6114B350ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB356	mk	XC9216B356D	DC-DC-IC	PWM/PFM st-dwn, 3.5V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB35C	mk	XC9216B35CD	DC-DC-IC	PWM/PFM st-dwn, 3.5V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB36	-	RP153L036B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB366	mk	XC9216B366D	DC-DC-IC	PWM/PFM st-dwn, 3.6V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB36C	mk	XC9216B36CD	DC-DC-IC	PWM/PFM st-dwn, 3.6V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB37	-	RP153L037B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB376	mk	XC9216B376D	DC-DC-IC	PWM/PFM st-dwn, 3.7V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB37C	mk	XC9216B37CD	DC-DC-IC	PWM/PFM st-dwn, 3.7V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB38	-	RP153L038B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB386	mk	XC9216B386D	DC-DC-IC	PWM/PFM st-dwn, 3.8V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB38C	mk	XC9216B38CD	DC-DC-IC	PWM/PFM st-dwn, 3.8V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB39	-	RP153L039B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB396	mk	XC9216B396D	DC-DC-IC	PWM/PFM st-dwn, 3.9V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB39C	mk	XC9216B39CD	DC-DC-IC	PWM/PFM st-dwn, 3.9V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB4	-	XC9237F14C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BB4	-	XC9237F14C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BB4	-	XC9237F14CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BB4	-	XC9260B14CER-G	DC-DC-IC	PWM step-down, 1.4V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BB40	-	RP153L040B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB406	mk	XC9216B406D	DC-DC-IC	PWM/PFM st-dwn, 4.0V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB40C	mk	XC9216B40CD	DC-DC-IC	PWM/PFM st-dwn, 4.0V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
BB41	-	RP153L041B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB416	-	XC6114B416ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB417	-	XC6114B417ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB418	-	XC6114B418ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB419	-	XC6114B419ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB42	-	RP153L042B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB420	-	XC6114B420ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB421	-	XC6114B421ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB422	-	XC6114B422ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB423	-	XC6114B423ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB424	-	XC6114B424ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB425	-	XC6114B425ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB426	-	XC6114B426ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BB427	-	XC6114B427ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB428	-	XC6114B428ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB429	-	XC6114B429ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB43	-	RP153L043B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB430	-	XC6114B430ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB431	-	XC6114B431ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB432	-	XC6114B432ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB433	-	XC6114B433ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB434	-	XC6114B434ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB435	-	XC6114B435ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB436	-	XC6114B436ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB437	-	XC6114B437ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB438	-	XC6114B438ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB439	-	XC6114B439ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB44	-	RP153L044B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB440	-	XC6114B440ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB441	-	XC6114B441ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB442	-	XC6114B442ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB443	-	XC6114B443ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB444	-	XC6114B444ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB445	-	XC6114B445ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB446	-	XC6114B446ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB447	-	XC6114B447ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB448	-	XC6114B448ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB449	-	XC6114B449ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB45	-	RP153L045B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB450	-	XC6114B450ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB46	-	RP153L046B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB47	-	RP153L047B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB48	-	RP153L048B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB49	-	RP153L049B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB5	-	XC9237F15C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BB5	-	XC9237F15C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BB5	-	XC9237F15CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BB5	-	XC9260B15CER-G	DC-DC-IC	PWM step-down, 1.5V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BB50	-	RP153L050B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB51	-	RP153L051B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB516	-	XC6114B516ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB517	-	XC6114B517ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB518	-	XC6114B518ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB519	-	XC6114B519ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB52	-	RP153L052B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BB520	-	XC6114B520ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB521	-	XC6114B521ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB522	-	XC6114B522ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB523	-	XC6114B523ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB524	-	XC6114B524ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB525	-	XC6114B525ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB526	-	XC6114B526ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB527	-	XC6114B527ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB528	-	XC6114B528ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB529	-	XC6114B529ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB530	-	XC6114B530ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB531	-	XC6114B531ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB532	-	XC6114B532ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB533	-	XC6114B533ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB534	-	XC6114B534ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB535	-	XC6114B535ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB536	-	XC6114B536ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB537	-	XC6114B537ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB538	-	XC6114B538ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB539	-	XC6114B539ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB540	-	XC6114B540ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB541	-	XC6114B541ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB542	-	XC6114B542ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB543	-	XC6114B543ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB544	-	XC6114B544ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB545	-	XC6114B545ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB546	-	XC6114B546ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB547	-	XC6114B547ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BB548	-	XC6114B548ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB549	-	XC6114B549ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB550	-	XC6114B550ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB6	-	XC9237F16C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BB6	-	XC9237F16C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BB6	-	XC9237F16CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BB6	-	XC9260B16CER-G	DC-DC-IC	PWM step-down, 1.6V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BB616	-	XC6114B616ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB617	-	XC6114B617ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB618	-	XC6114B618ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB619	-	XC6114B619ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB620	-	XC6114B620ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB621	-	XC6114B621ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB622	-	XC6114B622ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB623	-	XC6114B623ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB624	-	XC6114B624ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB625	-	XC6114B625ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB626	-	XC6114B626ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB627	-	XC6114B627ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB628	-	XC6114B628ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB629	-	XC6114B629ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB630	-	XC6114B630ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB631	-	XC6114B631ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB632	-	XC6114B632ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB633	-	XC6114B633ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB634	-	XC6114B634ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB635	-	XC6114B635ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB636	-	XC6114B636ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB637	-	XC6114B637ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB638	-	XC6114B638ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB639	-	XC6114B639ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB640	-	XC6114B640ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB641	-	XC6114B641ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB642	-	XC6114B642ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB643	-	XC6114B643ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB644	-	XC6114B644ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB645	-	XC6114B645ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB646	-	XC6114B646ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB647	-	XC6114B647ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB648	-	XC6114B648ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB649	-	XC6114B649ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB650	-	XC6114B650ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD19	9b	Tor
BB7	-	XC9237F17C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BB7	-	XC9237F17C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BB7	-	XC9237F17CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BB7	-	XC9260B17CER-G	DC-DC-IC	PWM step-down, 1.7V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BB8	-	XC9237F18C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BB8	-	XC9237F18C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BB8	-	XC9237F18CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BB8	-	XC9260B18CER-G	DC-DC-IC	PWM step-down, 1.8V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BB9	-	XC9237F19C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BB9	-	XC9237F19C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BB9	-	XC9237F19CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BB9	-	XC9260B19CER-G	DC-DC-IC	PWM step-down, 1.9V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BBA	-	TC1302BBAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBA	-	XC9237F1AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BBA	-	XC9237F1AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BBA	-	XC9237F1ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BBA	-	XC9260B1ACER-G	DC-DC-IC	PWM step-down, 1.05V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BBAA	-	TC1301BBAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBAB	-	TC1301BBABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBAC	-	TC1301BBACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBAD	-	TC1301BBADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBAE	-	TC1301BBAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBAF	-	TC1301BBAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBB	-	TC1302BBBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBB	-	XC9237F1BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BBB	-	XC9237F1BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BBB	-	XC9237F1BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BBB	-	XC9260B1BCER-G	DC-DC-IC	PWM step-down, 1.15V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BBBA	-	TC1301BBBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBBB	-	TC1301BBBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBBC	-	TC1301BBBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBBD	-	TC1301BBBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBBE	-	TC1301BBBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBBF	-	TC1301BBBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBC	-	TC1302BBCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBC	-	XC9237F1CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BBC	-	XC9237F1CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BBC	-	XC9237F1CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BBC	-	XC9260B1CCER-G	DC-DC-IC	PWM step-down, 1.25V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BBCA	-	TC1301BBCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBCB	-	TC1301BBCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBCC	-	TC1301BBCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBCD	-	TC1301BBCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBCE	-	TC1301BBCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBCF	-	TC1301BBCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBD	-	TC1302BBDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBD	-	XC9237F1DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BBD	-	XC9237F1DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BBD	-	XC9237F1DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BBD	-	XC9260B1DCER-G	DC-DC-IC	PWM step-down, 1.35VV±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BBDA	-	TC1301BBDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBDB	-	TC1301BBDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBDC	-	TC1301BBDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBDD	-	TC1301BBDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBDE	-	TC1301BBDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBDF	-	TC1301BBDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBE	-	TC1302BBEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBE	-	XC9237F1EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BBE	-	XC9237F1EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BBE	-	XC9237F1ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BBE	-	XC9260B1ECER-G	DC-DC-IC	PWM step-down, 1.45V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BBEA	-	TC1301BBEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBEB	-	TC1301BBEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBEC	-	TC1301BBECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBED	-	TC1301BBEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBEE	-	TC1301BBEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBEF	-	TC1301BBEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBF	-	TC1302BBFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBF	-	XC9237F1FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BBF	-	XC9237F1FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BBF	-	XC9237F1FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BBF	-	XC9260B1FCER-G	DC-DC-IC	PWM step-down, 1.55V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BBFA	-	TC1301BBFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBFB	-	TC1301BBFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBFC	-	TC1301BBFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBFD	-	TC1301BBFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBFE	-	TC1301BBFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBFF	-	TC1301BBFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBG	-	TC1302BBGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBGA	-	TC1301BBGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBGB	-	TC1301BBGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBGC	-	TC1301BBGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBGD	-	TC1301BBGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBGE	-	TC1301BBGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBGF	-	TC1301BBGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBH	-	TC1302BBHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBH	-	XC9237F1HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BBH	-	XC9237F1HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BBH	-	XC9237F1HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BBH	-	XC9260B1HCER-G	DC-DC-IC	PWM step-down, 1.65V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BBHA	-	TC1301BBHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBHB	-	TC1301BBHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBHC	-	TC1301BBHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBHD	-	TC1301BBHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBHE	-	TC1301BBHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBHF	-	TC1301BBHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBI	-	TC1302BBIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBIA	-	TC1301BBIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BBIB	-	TC1301BBIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBIC	-	TC1301BBICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBID	-	TC1301BBIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBIE	-	TC1301BBIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBIF	-	TC1301BBIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBJ	-	TC1302BBJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBJA	-	TC1301BBJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBJB	-	TC1301BBJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBJC	-	TC1301BBJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBJD	-	TC1301BBJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBJE	-	TC1301BBJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBJF	-	TC1301BBJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBK	-	TC1302BBKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBK	-	XC9237F1KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BBK	-	XC9237F1KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BBK	-	XC9237F1KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BBK	-	XC9260B1KCER-G	DC-DC-IC	PWM step-down, 1.75V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BBKA	-	TC1301BBKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBKB	-	TC1301BBKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBKC	-	TC1301BBKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBKD	-	TC1301BBKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBKE	-	TC1301BBKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBKF	-	TC1301BBKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBL	-	TC1302BBLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBL	-	XC9237F1LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BBL	-	XC9237F1LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BBL	-	XC9237F1LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BBL	-	XC9260B1LCER-G	DC-DC-IC	PWM step-down, 1.85V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BBLA	-	TC1301BBLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBLB	-	TC1301BBLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBLC	-	TC1301BBLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBLD	-	TC1301BBLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBLE	-	TC1301BBLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBLF	-	TC1301BBLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBM	-	TC1302BBMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBM	-	XC9237F1MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BBM	-	XC9237F1MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BBM	-	XC9237F1MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BBM	-	XC9260B1MCER-G	DC-DC-IC	PWM step-down, 1.95V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BBMA	-	TC1301BBMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBMB	-	TC1301BBMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBMC	-	TC1301BBMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBMD	-	TC1301BBMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBME	-	TC1301BBMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBMF	-	TC1301BBMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBN	-	TC1302BBNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBN	-	XC6119C10A7R	Vdet-IC	1.0V±30mV, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BBNA	-	TC1301BBNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBNB	-	TC1301BBNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBNC	-	TC1301BBNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBND	-	TC1301BBNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBNE	-	TC1301BBNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBNF	-	TC1301BBNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBO	-	TC1302BBOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBOA	-	TC1301BBOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBOB	-	TC1301BBOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBOC	-	TC1301BBOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBOD	-	TC1301BBODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBOE	-	TC1301BBOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBOF	-	TC1301BBOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBP	-	TC1302BBPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBP	-	XC6119C11A7R	Vdet-IC	1.1V±30mV, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BBPA	-	TC1301BBPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBPB	-	TC1301BBPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBPC	-	TC1301BBPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBPD	-	TC1301BBPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBPE	-	TC1301BBPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBPF	-	TC1301BBPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBQ	-	TC1302BBQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBQA	-	TC1301BBQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BBQB	-	TC1301BBQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBQC	-	TC1301BBQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBQD	-	TC1301BBQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBQE	-	TC1301BBQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBQF	-	TC1301BBQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBR	-	TC1302BBRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBR	-	XC6119C12A7R	Vdet-IC	1.2V±30mV, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BBRA	-	TC1301BBRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBRB	-	TC1301BBRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBRC	-	TC1301BBRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBRD	-	TC1301BBRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBRE	-	TC1301BBREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBRF	-	TC1301BBRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBS	-	TC1302BBSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBS	-	XC6119C13A7R	Vdet-IC	1.3V±30mV, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BBSA	-	TC1301BBSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBSB	-	TC1301BBSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBSC	-	TC1301BBSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBSD	-	TC1301BBSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBSE	-	TC1301BBSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBSF	-	TC1301BBSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBT	-	TC1302BBTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBT	-	XC6119C14A7R	Vdet-IC	1.4V±30mV, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BBTA	-	TC1301BBTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBTB	-	TC1301BBTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBTC	-	TC1301BBTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBTD	-	TC1301BBTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBTE	-	TC1301BBTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBTF	-	TC1301BBTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBU	-	TC1302BBUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBU	-	XC6119C15A7R	Vdet-IC	1.5V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BBUA	-	TC1301BBUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBUB	-	TC1301BBUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBUC	-	TC1301BBUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBUD	-	TC1301BBUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBUE	-	TC1301BBUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBUF	-	TC1301BBUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBV	-	TC1302BBVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBV	-	XC6119C16A7R	Vdet-IC	1.6V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BBVA	-	TC1301BBVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBVB	-	TC1301BBVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBVC	-	TC1301BBVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBVD	-	TC1301BBVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBVE	-	TC1301BBVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBVF	-	TC1301BBVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBW	-	TC1302BBWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BBWA	-	TC1301BBWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBWB	-	TC1301BBWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBWC	-	TC1301BBWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBWD	-	TC1301BBWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBWE	-	TC1301BBWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBWF	-	TC1301BBWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BBX	-	XC6119C17A7R	Vdet-IC	1.7V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BBY	-	XC6119C18A7R	Vdet-IC	1.8V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BBZ	-	XC6119C19A7R	Vdet-IC	1.9V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BC	-	BZX884-C6V8	Z-diode	6.8V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
BC	-	PAM8303DAZN	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 3W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Pam
BC	-	RP104K151C	LVR-IC	LDO, 1.5V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BC	-	RP105K081D	LVR-IC	LDO, 0.8V±15mV, 400mA, +CE, CL	DFN1212-6	52zd	VR11	9a	Ric
BC	-	RT9193-1HPQW	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
BC	-	XC6221B1317R	LVR-IC	LDO, 1.3V±20mV, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BC	-	XC6223D22B9R-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BC	-	XC9244A2AC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.05V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BC0	-	XC9237F20C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BC0	-	XC9237F20C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BC0	-	XC9237F20CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BC0	-	XC9260B20CER-G	DC-DC-IC	PWM step-down, 2.0V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BC01	-	RP153L001D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC02	-	RP153L002D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC03	-	RP153L003D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BC04	-	RP153L004D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC05	-	RP153L005D	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC06	-	RP153L006D	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC07	-	RP153L007D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC08	-	RP153L008D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC09	-	RP153L009D	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC096	mk	XC9216C096D	DC-DC-IC	PWM/PFM st-dwn, 0.9V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC09C	mk	XC9216C09CD	DC-DC-IC	PWM/PFM st-dwn, 0.9V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC1	-	XC9237F21C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BC1	-	XC9237F21C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BC1	-	XC9237F21CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BC1	-	XC9260B21CER-G	DC-DC-IC	PWM step-down, 2.1V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BC10	-	RP153L010D	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC106	mk	XC9216C106D	DC-DC-IC	PWM/PFM st-dwn, 1.0V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC10C	mk	XC9216C10CD	DC-DC-IC	PWM/PFM st-dwn, 1.0V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC11	-	RP153L011D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC116	mk	XC9216C116D	DC-DC-IC	PWM/PFM st-dwn, 1.1V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC11C	mk	XC9216C11CD	DC-DC-IC	PWM/PFM st-dwn, 1.1V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC12	-	RP153L012D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC126	mk	XC9216C126D	DC-DC-IC	PWM/PFM st-dwn, 1.2V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC12C	mk	XC9216C12CD	DC-DC-IC	PWM/PFM st-dwn, 1.2V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC13	-	RP153L013D	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC136	mk	XC9216C136D	DC-DC-IC	PWM/PFM st-dwn, 1.3V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC13C	mk	XC9216C13CD	DC-DC-IC	PWM/PFM st-dwn, 1.3V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC14	-	RP153L014D	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC146	mk	XC9216C146D	DC-DC-IC	PWM/PFM st-dwn, 1.4V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC14C	mk	XC9216C14CD	DC-DC-IC	PWM/PFM st-dwn, 1.4V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC15	-	RP153L015D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC156	mk	XC9216C156D	DC-DC-IC	PWM/PFM st-dwn, 1.5V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC15C	mk	XC9216C15CD	DC-DC-IC	PWM/PFM st-dwn, 1.5V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC16	-	RP153L016D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC166	mk	XC9216C166D	DC-DC-IC	PWM/PFM st-dwn, 1.6V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC16C	mk	XC9216C16CD	DC-DC-IC	PWM/PFM st-dwn, 1.6V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC17	-	RP153L017D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC176	mk	XC9216C176D	DC-DC-IC	PWM/PFM st-dwn, 1.7V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC17C	mk	XC9216C17CD	DC-DC-IC	PWM/PFM st-dwn, 1.7V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC18	-	RP153L018D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC186	mk	XC9216C186D	DC-DC-IC	PWM/PFM st-dwn, 1.8V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC18C	mk	XC9216C18CD	DC-DC-IC	PWM/PFM st-dwn, 1.8V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC19	-	RP153L019D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC196	mk	XC9216C196D	DC-DC-IC	PWM/PFM st-dwn, 1.9V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC19C	mk	XC9216C19CD	DC-DC-IC	PWM/PFM st-dwn, 1.9V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC2	-	XC9237F22C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BC2	-	XC9237F22C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BC2	-	XC9237F22CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BC2	-	XC9260B22CER-G	DC-DC-IC	PWM step-down, 2.2V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BC20	-	RP153L020D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC206	mk	XC9216C206D	DC-DC-IC	PWM/PFM st-dwn, 2.0V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC20C	mk	XC9216C20CD	DC-DC-IC	PWM/PFM st-dwn, 2.0V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC21	-	RP153L021D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC216	-	XC6114C216ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC216	mk	XC9216C216D	DC-DC-IC	PWM/PFM st-dwn, 2.1V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC217	-	XC6114C217ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC218	-	XC6114C218ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC219	-	XC6114C219ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC21C	mk	XC9216C21CD	DC-DC-IC	PWM/PFM st-dwn, 2.1V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC22	-	RP153L022D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC220	-	XC6114C220ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC221	-	XC6114C221ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC222	-	XC6114C222ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC223	-	XC6114C223ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC224	-	XC6114C224ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC225	-	XC6114C225ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC226	-	XC6114C226ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC226	mk	XC9216C226D	DC-DC-IC	PWM/PFM st-dwn, 2.2V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC227	-	XC6114C227ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC228	-	XC6114C228ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC229	-	XC6114C229ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC22C	mk	XC9216C22CD	DC-DC-IC	PWM/PFM st-dwn, 2.2V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC23	-	RP153L023D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BC230	-	XC6114C230ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC231	-	XC6114C231ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC232	-	XC6114C232ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC233	-	XC6114C233ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC234	-	XC6114C234ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC235	-	XC6114C235ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC236	-	XC6114C236ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC236	mk	XC9216C236D	DC-DC-IC	PWM/PFM st-dwn, 2.3V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC237	-	XC6114C237ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC238	-	XC6114C238ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC239	-	XC6114C239ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC23C	mk	XC9216C23CD	DC-DC-IC	PWM/PFM st-dwn, 2.3V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC24	-	RP153L024D	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC240	-	XC6114C240ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC241	-	XC6114C241ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC242	-	XC6114C242ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC243	-	XC6114C243ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC244	-	XC6114C244ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC245	-	XC6114C245ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC246	-	XC6114C246ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC246	mk	XC9216C246D	DC-DC-IC	PWM/PFM st-dwn, 2.4V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC247	-	XC6114C247ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC248	-	XC6114C248ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC249	-	XC6114C249ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC24C	mk	XC9216C24CD	DC-DC-IC	PWM/PFM st-dwn, 2.4V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC25	-	RP153L025D	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC250	-	XC6114C250ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC256	mk	XC9216C256D	DC-DC-IC	PWM/PFM st-dwn, 2.5V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC25C	mk	XC9216C25CD	DC-DC-IC	PWM/PFM st-dwn, 2.5V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC26	-	RP153L026D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC266	mk	XC9216C266D	DC-DC-IC	PWM/PFM st-dwn, 2.6V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC26C	mk	XC9216C26CD	DC-DC-IC	PWM/PFM st-dwn, 2.6V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC27	-	RP153L027D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC276	mk	XC9216C276D	DC-DC-IC	PWM/PFM st-dwn, 2.7V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC27C	mk	XC9216C27CD	DC-DC-IC	PWM/PFM st-dwn, 2.7V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC28	-	RP153L028D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC286	mk	XC9216C286D	DC-DC-IC	PWM/PFM st-dwn, 2.8V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC28C	mk	XC9216C28CD	DC-DC-IC	PWM/PFM st-dwn, 2.8V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC29	-	RP153L029D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC296	mk	XC9216C296D	DC-DC-IC	PWM/PFM st-dwn, 2.9V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC29C	mk	XC9216C29CD	DC-DC-IC	PWM/PFM st-dwn, 2.9V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC3	-	XC9237F23C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BC3	-	XC9237F23C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BC3	-	XC9237F23CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BC3	-	XC9260B23CER-G	DC-DC-IC	PWM step-down, 2.3V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BC30	-	RP153L030D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC306	mk	XC9216C306D	DC-DC-IC	PWM/PFM st-dwn, 3.0V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC30C	mk	XC9216C30CD	DC-DC-IC	PWM/PFM st-dwn, 3.0V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC31	-	RP153L031D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC316	-	XC6114C316ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC316	mk	XC9216C316D	DC-DC-IC	PWM/PFM st-dwn, 3.1V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC317	-	XC6114C317ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC318	-	XC6114C318ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC319	-	XC6114C319ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC31C	mk	XC9216C31CD	DC-DC-IC	PWM/PFM st-dwn, 3.1V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC32	-	RP153L032D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC320	-	XC6114C320ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC321	-	XC6114C321ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC322	-	XC6114C322ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC323	-	XC6114C323ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC324	-	XC6114C324ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC325	-	XC6114C325ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC326	-	XC6114C326ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC326	mk	XC9216C326D	DC-DC-IC	PWM/PFM st-dwn, 3.2V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC327	-	XC6114C327ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC328	-	XC6114C328ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC329	-	XC6114C329ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC32C	mk	XC9216C32CD	DC-DC-IC	PWM/PFM st-dwn, 3.2V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC33	-	RP153L033D	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC330	-	XC6114C330ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BC331	-	XC6114C331ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC332	-	XC6114C332ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC333	-	XC6114C333ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC334	-	XC6114C334ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC335	-	XC6114C335ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC336	-	XC6114C336ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC336	mk	XC9216C336D	DC-DC-IC	PWM/PFM st-dwn, 3.3V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC337	-	XC6114C337ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC338	-	XC6114C338ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC339	-	XC6114C339ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC33C	mk	XC9216C33CD	DC-DC-IC	PWM/PFM st-dwn, 3.3V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC34	-	RP153L034D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC340	-	XC6114C340ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC341	-	XC6114C341ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC342	-	XC6114C342ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC343	-	XC6114C343ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC344	-	XC6114C344ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC345	-	XC6114C345ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC346	-	XC6114C346ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC346	mk	XC9216C346D	DC-DC-IC	PWM/PFM st-dwn, 3.4V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC347	-	XC6114C347ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC348	-	XC6114C348ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC349	-	XC6114C349ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC34C	mk	XC9216C34CD	DC-DC-IC	PWM/PFM st-dwn, 3.4V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC35	-	RP153L035D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC350	-	XC6114C350ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC356	mk	XC9216C356D	DC-DC-IC	PWM/PFM st-dwn, 3.5V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC35C	mk	XC9216C35CD	DC-DC-IC	PWM/PFM st-dwn, 3.5V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC36	-	RP153L036D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC366	mk	XC9216C366D	DC-DC-IC	PWM/PFM st-dwn, 3.6V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC36C	mk	XC9216C36CD	DC-DC-IC	PWM/PFM st-dwn, 3.6V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC37	-	RP153L037D	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC376	mk	XC9216C376D	DC-DC-IC	PWM/PFM st-dwn, 3.7V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC37C	mk	XC9216C37CD	DC-DC-IC	PWM/PFM st-dwn, 3.7V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC38	-	RP153L038D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC386	mk	XC9216C386D	DC-DC-IC	PWM/PFM st-dwn, 3.8V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC38C	mk	XC9216C38CD	DC-DC-IC	PWM/PFM st-dwn, 3.8V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC39	-	RP153L039D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC396	mk	XC9216C396D	DC-DC-IC	PWM/PFM st-dwn, 3.9V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC39C	mk	XC9216C39CD	DC-DC-IC	PWM/PFM st-dwn, 3.9V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC4	-	XC9237F24C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BC4	-	XC9237F24C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BC4	-	XC9237F24CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BC4	-	XC9260B24CER-G	DC-DC-IC	PWM step-down, 2.4V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BC40	-	RP153L040D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC406	mk	XC9216C406D	DC-DC-IC	PWM/PFM st-dwn, 4.0V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC40C	mk	XC9216C40CD	DC-DC-IC	PWM/PFM st-dwn, 4.0V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
BC41	-	RP153L041D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC416	-	XC6114C416ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC417	-	XC6114C417ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC418	-	XC6114C418ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC419	-	XC6114C419ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC42	-	RP153L042D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC420	-	XC6114C420ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC421	-	XC6114C421ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC422	-	XC6114C422ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC423	-	XC6114C423ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC424	-	XC6114C424ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC425	-	XC6114C425ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC426	-	XC6114C426ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC427	-	XC6114C427ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC428	-	XC6114C428ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC429	-	XC6114C429ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC43	-	RP153L043D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC430	-	XC6114C430ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC431	-	XC6114C431ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC432	-	XC6114C432ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC433	-	XC6114C433ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC434	-	XC6114C434ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC435	-	XC6114C435ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BC436	-	XC6114C436ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC437	-	XC6114C437ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC438	-	XC6114C438ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC439	-	XC6114C439ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC44	-	RP153L044D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC440	-	XC6114C440ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC441	-	XC6114C441ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC442	-	XC6114C442ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC443	-	XC6114C443ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC444	-	XC6114C444ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC445	-	XC6114C445ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC446	-	XC6114C446ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC447	-	XC6114C447ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC448	-	XC6114C448ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC449	-	XC6114C449ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC45	-	RP153L045D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC450	-	XC6114C450ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC46	-	RP153L046D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC47	-	RP153L047D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC48	-	RP153L048D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC49	-	RP153L049D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC5	-	XC9237F25C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BC5	-	XC9237F25C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BC5	-	XC9237F25CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BC5	-	XC9260B25CER-G	DC-DC-IC	PWM step-down, 2.5V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BC50	-	RP153L050D	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC51	-	RP153L051D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC516	-	XC6114C516ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC517	-	XC6114C517ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC518	-	XC6114C518ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC519	-	XC6114C519ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC52	-	RP153L052D	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BC520	-	XC6114C520ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC521	-	XC6114C521ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC522	-	XC6114C522ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC523	-	XC6114C523ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC524	-	XC6114C524ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC525	-	XC6114C525ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC526	-	XC6114C526ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC527	-	XC6114C527ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC528	-	XC6114C528ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC529	-	XC6114C529ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC530	-	XC6114C530ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC531	-	XC6114C531ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC532	-	XC6114C532ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC533	-	XC6114C533ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC534	-	XC6114C534ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC535	-	XC6114C535ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC536	-	XC6114C536ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC537	-	XC6114C537ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC538	-	XC6114C538ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC539	-	XC6114C539ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC540	-	XC6114C540ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC541	-	XC6114C541ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC542	-	XC6114C542ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC543	-	XC6114C543ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC544	-	XC6114C544ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC545	-	XC6114C545ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC546	-	XC6114C546ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC547	-	XC6114C547ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC548	-	XC6114C548ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC549	-	XC6114C549ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC550	-	XC6114C550ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC6	-	XC9237F26C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BC6	-	XC9237F26C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BC6	-	XC9237F26CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BC6	-	XC9260B26CER-G	DC-DC-IC	PWM step-down, 2.6V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BC616	-	XC6114C616ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC617	-	XC6114C617ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC618	-	XC6114C618ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BC619	-	XC6114C619ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC620	-	XC6114C620ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC621	-	XC6114C621ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC622	-	XC6114C622ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC623	-	XC6114C623ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC624	-	XC6114C624ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC625	-	XC6114C625ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC626	-	XC6114C626ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC627	-	XC6114C627ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC628	-	XC6114C628ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC629	-	XC6114C629ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC630	-	XC6114C630ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC631	-	XC6114C631ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC632	-	XC6114C632ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC633	-	XC6114C633ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC634	-	XC6114C634ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC635	-	XC6114C635ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC636	-	XC6114C636ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC637	-	XC6114C637ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC638	-	XC6114C638ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC639	-	XC6114C639ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC640	-	XC6114C640ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC641	-	XC6114C641ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC642	-	XC6114C642ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC643	-	XC6114C643ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC644	-	XC6114C644ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC645	-	XC6114C645ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC646	-	XC6114C646ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC647	-	XC6114C647ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC648	-	XC6114C648ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC649	-	XC6114C649ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC650	-	XC6114C650ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD19	9b	Tor
BC7	-	XC9237F27C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BC7	-	XC9237F27C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BC7	-	XC9237F27CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BC7	-	XC9260B27CER-G	DC-DC-IC	PWM step-down, 2.7V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BC8	-	XC9237F28C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BC8	-	XC9237F28C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BC8	-	XC9237F28CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BC8	-	XC9260B28CER-G	DC-DC-IC	PWM step-down, 2.8V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BC9	-	XC9237F29C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BC9	-	XC9237F29C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BC9	-	XC9237F29CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BC9	-	XC9260B29CER-G	DC-DC-IC	PWM step-down, 2.9V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BCA	-	TC1302BCAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCA	-	XC9237F2AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BCA	-	XC9237F2AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BCA	-	XC9237F2ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BCA	-	XC9260B2ACER-G	DC-DC-IC	PWM step-down, 2.05V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BCAA	-	TC1301BCAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCAB	-	TC1301BCABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCAC	-	TC1301BCACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCAD	-	TC1301BCADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCAE	-	TC1301BCAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCAF	-	TC1301BCAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCB	-	TC1302BCBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCB	-	XC9237F2BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BCB	-	XC9237F2BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BCB	-	XC9237F2BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BCB	-	XC9260B2BCER-G	DC-DC-IC	PWM step-down, 2.15V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BCBA	-	TC1301BCBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCBB	-	TC1301BCBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCBC	-	TC1301BCBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCBD	-	TC1301BCBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCBE	-	TC1301BCBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCBF	-	TC1301BCBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCC	-	TC1302BCCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCC	-	XC9237F2CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BCC	-	XC9237F2CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BCC	-	XC9237F2CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BCC	-	XC9260B2CCER-G	DC-DC-IC	PWM step-down, 2.25V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BCCA	-	TC1301BCCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCCB	-	TC1301BCCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCCC	-	TC1301BCCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCCD	-	TC1301BCCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCCE	-	TC1301BCCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCCF	-	TC1301BCCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCD	-	TC1302BCDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCD	-	XC9237F2DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BCD	-	XC9237F2DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BCD	-	XC9237F2DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BCD	-	XC9260B2DCER-G	DC-DC-IC	PWM step-down, 2.35V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BCDA	-	TC1301BCDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCDB	-	TC1301BCDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCDC	-	TC1301BCDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCDD	-	TC1301BCDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCDE	-	TC1301BCDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCDF	-	TC1301BCDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCE	-	TC1302BCEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCE	-	XC9237F2EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BCE	-	XC9237F2EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BCE	-	XC9237F2ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BCE	-	XC9260B2ECER-G	DC-DC-IC	PWM step-down, 2.45V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BCEA	-	TC1301BCEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCEB	-	TC1301BCEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCEC	-	TC1301BCECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCED	-	TC1301BCEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCEE	-	TC1301BCEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCEF	-	TC1301BCEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCF	-	TC1302BCFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCF	-	XC9237F2FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BCF	-	XC9237F2FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BCF	-	XC9237F2FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BCF	-	XC9260B2FCER-G	DC-DC-IC	PWM step-down, 2.55V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BCFA	-	TC1301BCFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCFB	-	TC1301BCFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCFC	-	TC1301BCFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCFD	-	TC1301BCFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCFE	-	TC1301BCFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCFF	-	TC1301BCFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCG	-	TC1302BCGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCGA	-	TC1301BCGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCGB	-	TC1301BCGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCGC	-	TC1301BCGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCGD	-	TC1301BCGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCGE	-	TC1301BCGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCGF	-	TC1301BCGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCH	-	TC1302BCHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCH	-	XC9237F2HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BCH	-	XC9237F2HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BCH	-	XC9237F2HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BCH	-	XC9260B2HCER-G	DC-DC-IC	PWM step-down, 2.65V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BCHA	-	TC1301BCHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCHB	-	TC1301BCHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCHC	-	TC1301BCHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCHD	-	TC1301BCHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCHE	-	TC1301BCHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCHF	-	TC1301BCHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCI	-	TC1302BCIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCIA	-	TC1301BCIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCIB	-	TC1301BCIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCIC	-	TC1301BCICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCID	-	TC1301BCIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCIE	-	TC1301BCIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCIF	-	TC1301BCIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCJ	-	TC1302BCJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCJA	-	TC1301BCJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCJB	-	TC1301BCJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCJC	-	TC1301BCJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCJD	-	TC1301BCJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BCJE	-	TC1301BCJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCJF	-	TC1301BCJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCK	-	TC1302BCKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCK	-	XC9237F2KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BCK	-	XC9237F2KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BCK	-	XC9237F2KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BCK	-	XC9260B2KCER-G	DC-DC-IC	PWM step-down, 2.75V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BCKA	-	TC1301BCKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCKB	-	TC1301BCKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCKC	-	TC1301BCKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCKD	-	TC1301BCKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCKE	-	TC1301BCKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCKF	-	TC1301BCKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCL	-	TC1302BCLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCL	-	XC9237F2LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BCL	-	XC9237F2LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BCL	-	XC9237F2LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BCL	-	XC9260B2LCER-G	DC-DC-IC	PWM step-down, 2.85V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BCLA	-	TC1301BCLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCLB	-	TC1301BCLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCLC	-	TC1301BCLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCLD	-	TC1301BCLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCLE	-	TC1301BCLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCLF	-	TC1301BCLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCM	-	TC1302BCMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCM	-	XC9237F2MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BCM	-	XC9237F2MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BCM	-	XC9237F2MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BCM	-	XC9260B2MCER-G	DC-DC-IC	PWM step-down, 2.95V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BCMA	-	TC1301BCMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCMB	-	TC1301BCMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCMC	-	TC1301BCMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCMD	-	TC1301BCMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCME	-	TC1301BCMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCMF	-	TC1301BCMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCN	-	TC1302BCNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCN	-	XC6119C20A7R	Vdet-IC	2.0V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BCNA	-	TC1301BCNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCNB	-	TC1301BCNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCNC	-	TC1301BCNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCND	-	TC1301BCNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCNE	-	TC1301BCNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCNF	-	TC1301BCNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCO	-	TC1302BCOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCOA	-	TC1301BCOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCOB	-	TC1301BCOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCOC	-	TC1301BCOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCOD	-	TC1301BCODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCOE	-	TC1301BCOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCOF	-	TC1301BCOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCP	-	TC1302BCPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCP	-	XC6119C21A7R	Vdet-IC	2.1V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BCPA	-	TC1301BCPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCPB	-	TC1301BCPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCPC	-	TC1301BCPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCPD	-	TC1301BCPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCPE	-	TC1301BCPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCPF	-	TC1301BCPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCQ	-	TC1302BCQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCQA	-	TC1301BCQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCQB	-	TC1301BCQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCQC	-	TC1301BCQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCQD	-	TC1301BCQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCQE	-	TC1301BCQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCQF	-	TC1301BCQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCR	-	TC1302BCRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCR	-	XC6119C22A7R	Vdet-IC	2.2V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BCRA	-	TC1301BCRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCRB	-	TC1301BCRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCRC	-	TC1301BCRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BCRD	-	TC1301BCRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCRE	-	TC1301BCREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCRF	-	TC1301BCRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCS	-	TC1302BCSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCS	-	XC6119C23A7R	Vdet-IC	2.3V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BCSA	-	TC1301BCSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCSB	-	TC1301BCSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCSC	-	TC1301BCSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCSD	-	TC1301BCSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCSE	-	TC1301BCSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCSF	-	TC1301BCSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCT	-	TC1302BCTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCT	-	XC6119C24A7R	Vdet-IC	2.4V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BCTA	-	TC1301BCTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCTB	-	TC1301BCTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCTC	-	TC1301BCTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCTD	-	TC1301BCTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCTE	-	TC1301BCTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCTF	-	TC1301BCTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCU	-	TC1302BCUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCU	-	XC6119C25A7R	Vdet-IC	2.5V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BCUA	-	TC1301BCUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCUB	-	TC1301BCUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCUC	-	TC1301BCUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCUD	-	TC1301BCUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCUE	-	TC1301BCUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCUF	-	TC1301BCUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCV	-	TC1302BCVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCV	-	XC6119C26A7R	Vdet-IC	2.6V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BCVA	-	TC1301BCVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCVB	-	TC1301BCVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCVC	-	TC1301BCVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCVD	-	TC1301BCVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCVE	-	TC1301BCVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCVF	-	TC1301BCVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCW	-	TC1302BCWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BCWA	-	TC1301BCWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCWB	-	TC1301BCWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCWC	-	TC1301BCWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCWD	-	TC1301BCWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCWE	-	TC1301BCWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCWF	-	TC1301BCWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BCX	-	XC6119C27A7R	Vdet-IC	2.7V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BCY	-	XC6119C28A7R	Vdet-IC	2.8V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BCZ	-	XC6119C29A7R	Vdet-IC	2.9V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BD	-	BZX884-C7V5	Z-diode	7.5V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
BD	-	RP104K181C	LVR-IC	LDO, 1.8V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BD	-	RP105K091D	LVR-IC	LDO, 0.9V±15mV, 400mA, +CE, CL	DFN1212-6	52zd	VR11	9a	Ric
BD	-	RT9193-28PQW	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
BD	-	XC6221B1417R	LVR-IC	LDO, 1.4V±20mV, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BD	-	XC6223D23B9R-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BD	-	XC9244A2BC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.15V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BD0	-	XC9237F30C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BD0	-	XC9237F30C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BD0	-	XC9237F30CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BD0	-	XC9260B30CER-G	DC-DC-IC	PWM step-down, 3.0V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BD01	-	RP153L001E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD02	-	RP153L002E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD03	-	RP153L003E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD04	-	RP153L004E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD05	-	RP153L005E	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD06	-	RP153L006E	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD07	-	RP153L007E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD08	-	RP153L008E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD09	-	RP153L009E	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD096	mk	XC9216D096D	DC-DC-IC	PWM/PFM st-dwn, 0.9V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD09C	mk	XC9216D09CD	DC-DC-IC	PWM/PFM st-dwn, 0.9V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD1	-	XC9237F31C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BD1	-	XC9237F31C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BD1	-	XC9237F31CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BD1	-	XC9260B31CER-G	DC-DC-IC	PWM step-down, 3.1V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BD10	-	RP153L010E	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD106	mk	XC9216D106D	DC-DC-IC	PWM/PFM st-dwn, 1.0V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD10C	mk	XC9216D10CD	DC-DC-IC	PWM/PFM st-dwn, 1.0V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD11	-	RP153L011E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD116	mk	XC9216D116D	DC-DC-IC	PWM/PFM st-dwn, 1.1V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD11C	mk	XC9216D11CD	DC-DC-IC	PWM/PFM st-dwn, 1.1V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD12	-	RP153L012E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD126	mk	XC9216D126D	DC-DC-IC	PWM/PFM st-dwn, 1.2V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD12C	mk	XC9216D12CD	DC-DC-IC	PWM/PFM st-dwn, 1.2V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD13	-	RP153L013E	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD136	mk	XC9216D136D	DC-DC-IC	PWM/PFM st-dwn, 1.3V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD13C	mk	XC9216D13CD	DC-DC-IC	PWM/PFM st-dwn, 1.3V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD14	-	RP153L014E	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD146	mk	XC9216D146D	DC-DC-IC	PWM/PFM st-dwn, 1.4V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD14C	mk	XC9216D14CD	DC-DC-IC	PWM/PFM st-dwn, 1.4V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD15	-	RP153L015E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD156	mk	XC9216D156D	DC-DC-IC	PWM/PFM st-dwn, 1.5V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD15C	mk	XC9216D15CD	DC-DC-IC	PWM/PFM st-dwn, 1.5V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD16	-	RP153L016E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD166	mk	XC9216D166D	DC-DC-IC	PWM/PFM st-dwn, 1.6V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD16C	mk	XC9216D16CD	DC-DC-IC	PWM/PFM st-dwn, 1.6V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD17	-	RP153L017E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD176	mk	XC9216D176D	DC-DC-IC	PWM/PFM st-dwn, 1.7V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD17C	mk	XC9216D17CD	DC-DC-IC	PWM/PFM st-dwn, 1.7V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD18	-	RP153L018E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD186	mk	XC9216D186D	DC-DC-IC	PWM/PFM st-dwn, 1.8V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD18C	mk	XC9216D18CD	DC-DC-IC	PWM/PFM st-dwn, 1.8V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD19	-	RP153L019E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD196	mk	XC9216D196D	DC-DC-IC	PWM/PFM st-dwn, 1.9V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD19C	mk	XC9216D19CD	DC-DC-IC	PWM/PFM st-dwn, 1.9V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD2	-	XC9237F32C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BD2	-	XC9237F32C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BD2	-	XC9237F32CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BD2	-	XC9260B32CER-G	DC-DC-IC	PWM step-down, 3.2V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BD20	-	RP153L020E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD206	mk	XC9216D206D	DC-DC-IC	PWM/PFM st-dwn, 2.0V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD20C	mk	XC9216D20CD	DC-DC-IC	PWM/PFM st-dwn, 2.0V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD21	-	RP153L021E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD216	mk	XC9216D216D	DC-DC-IC	PWM/PFM st-dwn, 2.1V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD21C	mk	XC9216D21CD	DC-DC-IC	PWM/PFM st-dwn, 2.1V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD22	-	RP153L022E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD226	mk	XC9216D226D	DC-DC-IC	PWM/PFM st-dwn, 2.2V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD22C	mk	XC9216D22CD	DC-DC-IC	PWM/PFM st-dwn, 2.2V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD23	-	RP153L023E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD236	mk	XC9216D236D	DC-DC-IC	PWM/PFM st-dwn, 2.3V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD23C	mk	XC9216D23CD	DC-DC-IC	PWM/PFM st-dwn, 2.3V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD24	-	RP153L024E	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD246	mk	XC9216D246D	DC-DC-IC	PWM/PFM st-dwn, 2.4V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD24C	mk	XC9216D24CD	DC-DC-IC	PWM/PFM st-dwn, 2.4V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD25	-	RP153L025E	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD256	mk	XC9216D256D	DC-DC-IC	PWM/PFM st-dwn, 2.5V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD25C	mk	XC9216D25CD	DC-DC-IC	PWM/PFM st-dwn, 2.5V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD26	-	RP153L026E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD266	mk	XC9216D266D	DC-DC-IC	PWM/PFM st-dwn, 2.6V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD26C	mk	XC9216D26CD	DC-DC-IC	PWM/PFM st-dwn, 2.6V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD27	-	RP153L027E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD276	mk	XC9216D276D	DC-DC-IC	PWM/PFM st-dwn, 2.7V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD27C	mk	XC9216D27CD	DC-DC-IC	PWM/PFM st-dwn, 2.7V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD28	-	RP153L028E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD286	mk	XC9216D286D	DC-DC-IC	PWM/PFM st-dwn, 2.8V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD28C	mk	XC9216D28CD	DC-DC-IC	PWM/PFM st-dwn, 2.8V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD29	-	RP153L029E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD296	mk	XC9216D296D	DC-DC-IC	PWM/PFM st-dwn, 2.9V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD29C	mk	XC9216D29CD	DC-DC-IC	PWM/PFM st-dwn, 2.9V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD3	-	XC9237F33C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BD3	-	XC9237F33C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BD3	-	XC9237F33CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BD3	-	XC9260B33CER-G	DC-DC-IC	PWM step-down, 3.3V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BD30	-	RP153L030E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BD306	mk	XC9216D306D	DC-DC-IC	PWM/PFM st-dwn, 3.0V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD30C	mk	XC9216D30CD	DC-DC-IC	PWM/PFM st-dwn, 3.0V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD31	-	RP153L031E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD316	-	XC6114D316ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD316	mk	XC9216D316D	DC-DC-IC	PWM/PFM st-dwn, 3.1V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD317	-	XC6114D317ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD318	-	XC6114D318ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD319	-	XC6114D319ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD31C	mk	XC9216D31CD	DC-DC-IC	PWM/PFM st-dwn, 3.1V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD32	-	RP153L032E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD320	-	XC6114D320ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD321	-	XC6114D321ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD322	-	XC6114D322ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD323	-	XC6114D323ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD324	-	XC6114D324ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD325	-	XC6114D325ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD326	-	XC6114D326ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD326	mk	XC9216D326D	DC-DC-IC	PWM/PFM st-dwn, 3.2V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD327	-	XC6114D327ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD328	-	XC6114D328ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD329	-	XC6114D329ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD32C	mk	XC9216D32CD	DC-DC-IC	PWM/PFM st-dwn, 3.2V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD33	-	RP153L033E	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD330	-	XC6114D330ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD331	-	XC6114D331ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD332	-	XC6114D332ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD333	-	XC6114D333ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD334	-	XC6114D334ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD335	-	XC6114D335ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD336	-	XC6114D336ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD336	mk	XC9216D336D	DC-DC-IC	PWM/PFM st-dwn, 3.3V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD337	-	XC6114D337ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD338	-	XC6114D338ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD339	-	XC6114D339ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD33C	mk	XC9216D33CD	DC-DC-IC	PWM/PFM st-dwn, 3.3V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD34	-	RP153L034E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD340	-	XC6114D340ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD341	-	XC6114D341ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD342	-	XC6114D342ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD343	-	XC6114D343ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD344	-	XC6114D344ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD345	-	XC6114D345ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD346	-	XC6114D346ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD346	mk	XC9216D346D	DC-DC-IC	PWM/PFM st-dwn, 3.4V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD347	-	XC6114D347ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD348	-	XC6114D348ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD349	-	XC6114D349ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD34C	mk	XC9216D34CD	DC-DC-IC	PWM/PFM st-dwn, 3.4V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD35	-	RP153L035E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD350	-	XC6114D350ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD356	mk	XC9216D356D	DC-DC-IC	PWM/PFM st-dwn, 3.5V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD35C	mk	XC9216D35CD	DC-DC-IC	PWM/PFM st-dwn, 3.5V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD36	-	RP153L036E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD366	mk	XC9216D366D	DC-DC-IC	PWM/PFM st-dwn, 3.6V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD36C	mk	XC9216D36CD	DC-DC-IC	PWM/PFM st-dwn, 3.6V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD37	-	RP153L037E	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD376	mk	XC9216D376D	DC-DC-IC	PWM/PFM st-dwn, 3.7V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD37C	mk	XC9216D37CD	DC-DC-IC	PWM/PFM st-dwn, 3.7V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD38	-	RP153L038E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD386	mk	XC9216D386D	DC-DC-IC	PWM/PFM st-dwn, 3.8V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD38C	mk	XC9216D38CD	DC-DC-IC	PWM/PFM st-dwn, 3.8V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD39	-	RP153L039E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD396	mk	XC9216D396D	DC-DC-IC	PWM/PFM st-dwn, 3.9V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD39C	mk	XC9216D39CD	DC-DC-IC	PWM/PFM st-dwn, 3.9V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD4	-	XC9237F34C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BD4	-	XC9237F34C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BD4	-	XC9237F34CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BD4	-	XC9260B34CER-G	DC-DC-IC	PWM step-down, 3.4V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BD40	-	RP153L040E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD406	mk	XC9216D406D	DC-DC-IC	PWM/PFM st-dwn, 4.0V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BD40C	mk	XC9216D40CD	DC-DC-IC	PWM/PFM st-dwn, 4.0V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
BD41	-	RP153L041E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD416	-	XC6114D416ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD417	-	XC6114D417ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD418	-	XC6114D418ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD419	-	XC6114D419ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD42	-	RP153L042E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD420	-	XC6114D420ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD421	-	XC6114D421ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD422	-	XC6114D422ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD423	-	XC6114D423ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD424	-	XC6114D424ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD425	-	XC6114D425ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD426	-	XC6114D426ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD427	-	XC6114D427ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD428	-	XC6114D428ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD429	-	XC6114D429ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD43	-	RP153L043E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD430	-	XC6114D430ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD431	-	XC6114D431ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD432	-	XC6114D432ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD433	-	XC6114D433ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD434	-	XC6114D434ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD435	-	XC6114D435ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD436	-	XC6114D436ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD437	-	XC6114D437ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD438	-	XC6114D438ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD439	-	XC6114D439ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD44	-	RP153L044E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD440	-	XC6114D440ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD441	-	XC6114D441ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD442	-	XC6114D442ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD443	-	XC6114D443ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD444	-	XC6114D444ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD445	-	XC6114D445ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD446	-	XC6114D446ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD447	-	XC6114D447ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD448	-	XC6114D448ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD449	-	XC6114D449ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD45	-	RP153L045E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD450	-	XC6114D450ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD46	-	RP153L046E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD47	-	RP153L047E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD48	-	RP153L048E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD49	-	RP153L049E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD5	-	XC9237F35C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BD5	-	XC9237F35C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BD5	-	XC9237F35CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BD5	-	XC9260B35CER-G	DC-DC-IC	PWM step-down, 3.5V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BD50	-	RP153L050E	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD51	-	RP153L051E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD516	-	XC6114D516ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD517	-	XC6114D517ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD518	-	XC6114D518ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD519	-	XC6114D519ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD52	-	RP153L052E	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BD520	-	XC6114D520ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD521	-	XC6114D521ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD522	-	XC6114D522ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD523	-	XC6114D523ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD524	-	XC6114D524ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD525	-	XC6114D525ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD526	-	XC6114D526ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD527	-	XC6114D527ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD528	-	XC6114D528ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD529	-	XC6114D529ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD530	-	XC6114D530ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD531	-	XC6114D531ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD532	-	XC6114D532ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD533	-	XC6114D533ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BD534	-	XC6114D534ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD535	-	XC6114D535ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD536	-	XC6114D536ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD537	-	XC6114D537ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD538	-	XC6114D538ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD539	-	XC6114D539ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD540	-	XC6114D540ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD541	-	XC6114D541ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD542	-	XC6114D542ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD543	-	XC6114D543ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD544	-	XC6114D544ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD545	-	XC6114D545ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD546	-	XC6114D546ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD547	-	XC6114D547ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD548	-	XC6114D548ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD549	-	XC6114D549ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD550	-	XC6114D550ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD6	-	XC9237F36C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BD6	-	XC9237F36C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BD6	-	XC9237F36CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BD6	-	XC9260B36CER-G	DC-DC-IC	PWM step-down, 3.6V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BD616	-	XC6114D616ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD617	-	XC6114D617ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD618	-	XC6114D618ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD619	-	XC6114D619ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD620	-	XC6114D620ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD621	-	XC6114D621ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD622	-	XC6114D622ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD623	-	XC6114D623ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD624	-	XC6114D624ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD625	-	XC6114D625ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD626	-	XC6114D626ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD627	-	XC6114D627ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD628	-	XC6114D628ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD629	-	XC6114D629ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD630	-	XC6114D630ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD631	-	XC6114D631ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD632	-	XC6114D632ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD633	-	XC6114D633ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD634	-	XC6114D634ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD635	-	XC6114D635ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD636	-	XC6114D636ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD637	-	XC6114D637ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD638	-	XC6114D638ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD639	-	XC6114D639ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD640	-	XC6114D640ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD641	-	XC6114D641ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD642	-	XC6114D642ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD643	-	XC6114D643ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD644	-	XC6114D644ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD645	-	XC6114D645ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD646	-	XC6114D646ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD647	-	XC6114D647ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD648	-	XC6114D648ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD649	-	XC6114D649ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD650	-	XC6114D650ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD19	9b	Tor
BD7	-	XC9237F37C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BD7	-	XC9237F37C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BD7	-	XC9237F37CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BD8	-	XC9237F38C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BD8	-	XC9237F38C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BD8	-	XC9237F38CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BD9	-	XC9237F39C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BD9	-	XC9237F39C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BD9	-	XC9237F39CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BDA	-	TC1302BDAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDA	-	XC9237F3AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BDA	-	XC9237F3AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BDA	-	XC9237F3ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BDA	-	XC9260B3ACER-G	DC-DC-IC	PWM step-down, 3.05V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BDAA	-	TC1301BDAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDAB	-	TC1301BDABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDAC	-	TC1301BDACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDAD	-	TC1301BDADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDAE	-	TC1301BDAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDAF	-	TC1301BDAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDB	-	TC1302BDBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDB	-	XC9237F3BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BDB	-	XC9237F3BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BDB	-	XC9237F3BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BDB	-	XC9260B3BCER-G	DC-DC-IC	PWM step-down, 3.15V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BDBA	-	TC1301BDBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDBB	-	TC1301BDBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDBC	-	TC1301BDBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDBD	-	TC1301BDBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDBE	-	TC1301BDBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDBF	-	TC1301BDBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDC	-	TC1302BDCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDC	-	XC9237F3CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BDC	-	XC9237F3CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BDC	-	XC9237F3CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BDC	-	XC9260B3CCER-G	DC-DC-IC	PWM step-down, 3.25V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BDCA	-	TC1301BDCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDCB	-	TC1301BDCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDCC	-	TC1301BDCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDCD	-	TC1301BDCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDCE	-	TC1301BDCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDCF	-	TC1301BDCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDD	-	TC1302BDDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDD	-	XC9237F3DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BDD	-	XC9237F3DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BDD	-	XC9237F3DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BDD	-	XC9260B3DCER-G	DC-DC-IC	PWM step-down, 3.35V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BDDA	-	TC1301BDDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDDB	-	TC1301BDDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDDC	-	TC1301BDDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDDD	-	TC1301BDDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDDE	-	TC1301BDDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDDF	-	TC1301BDDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDE	-	TC1302BDEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDE	-	XC9237F3EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BDE	-	XC9237F3EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BDE	-	XC9237F3ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BDE	-	XC9260B3ECER-G	DC-DC-IC	PWM step-down, 3.45V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BDEA	-	TC1301BDEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDEB	-	TC1301BDEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDEC	-	TC1301BDECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDED	-	TC1301BDEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDEE	-	TC1301BDEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDEF	-	TC1301BDEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDF	-	TC1302BDFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDF	-	XC9237F3FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BDF	-	XC9237F3FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BDF	-	XC9237F3FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BDF	-	XC9260B3FCER-G	DC-DC-IC	PWM step-down, 3.55V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BDFA	-	TC1301BDFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDFB	-	TC1301BDFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDFC	-	TC1301BDFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDFD	-	TC1301BDFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDFE	-	TC1301BDFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDFF	-	TC1301BDFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDG	-	TC1302BDGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDGA	-	TC1301BDGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDGB	-	TC1301BDGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDGC	-	TC1301BDGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDGD	-	TC1301BDGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDGE	-	TC1301BDGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDGF	-	TC1301BDGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDH	-	TC1302BDHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDH	-	XC9237F3HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BDH	-	XC9237F3HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BDH	-	XC9237F3HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BDHA	-	TC1301BDHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDHB	-	TC1301BDHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDHC	-	TC1301BDHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDHD	-	TC1301BDHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDHE	-	TC1301BDHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDHF	-	TC1301BDHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDI	-	TC1302BDIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDIA	-	TC1301BDIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDIB	-	TC1301BDIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDIC	-	TC1301BDICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDID	-	TC1301BDIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDIE	-	TC1301BDIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDIF	-	TC1301BDIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDJ	-	TC1302BDJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDJA	-	TC1301BDJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDJB	-	TC1301BDJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDJC	-	TC1301BDJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDJD	-	TC1301BDJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDJE	-	TC1301BDJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDJF	-	TC1301BDJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDK	-	TC1302BDKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDK	-	XC9237F3KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BDK	-	XC9237F3KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BDK	-	XC9237F3KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BDKA	-	TC1301BDKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDKB	-	TC1301BDKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDKC	-	TC1301BDKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDKD	-	TC1301BDKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDKE	-	TC1301BDKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDKF	-	TC1301BDKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDL	-	TC1302BDLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDL	-	XC9237F3LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BDL	-	XC9237F3LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BDL	-	XC9237F3LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BDLA	-	TC1301BDLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDLB	-	TC1301BDLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDLC	-	TC1301BDLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDLD	-	TC1301BDLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDLE	-	TC1301BDLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDLF	-	TC1301BDLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDM	-	TC1302BDMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDM	-	XC9237F3MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BDM	-	XC9237F3MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BDM	-	XC9237F3MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BDMA	-	TC1301BDMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDMB	-	TC1301BDMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDMC	-	TC1301BDMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDMD	-	TC1301BDMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDME	-	TC1301BDMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDMF	-	TC1301BDMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDN	-	TC1302BDNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDN	-	XC6119C30A7R	Vdet-IC	3.0V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BDNA	-	TC1301BDNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDNB	-	TC1301BDNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDNC	-	TC1301BDNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDND	-	TC1301BDNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDNE	-	TC1301BDNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDNF	-	TC1301BDNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDO	-	TC1302BDOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDOA	-	TC1301BDOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDOB	-	TC1301BDOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDOC	-	TC1301BDOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDOD	-	TC1301BDODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDOE	-	TC1301BDOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDOF	-	TC1301BDOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDP	-	TC1302BDPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDP	-	XC6119C31A7R	Vdet-IC	3.1V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BDPA	-	TC1301BDPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BDPB	-	TC1301BDPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDPC	-	TC1301BDPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDPD	-	TC1301BDPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDPE	-	TC1301BDPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDPF	-	TC1301BDPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDQ	-	TC1302BDQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDQA	-	TC1301BDQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDQB	-	TC1301BDQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDQC	-	TC1301BDQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDQD	-	TC1301BDQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDQE	-	TC1301BDQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDQF	-	TC1301BDQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDR	-	TC1302BDRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDR	-	XC6119C32A7R	Vdet-IC	3.2V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BDRA	-	TC1301BDRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDRB	-	TC1301BDRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDRC	-	TC1301BDRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDRD	-	TC1301BDRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDRE	-	TC1301BDREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDRF	-	TC1301BDRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDS	-	TC1302BDSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDS	-	XC6119C33A7R	Vdet-IC	3.3V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BDSA	-	TC1301BDSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDSB	-	TC1301BDSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDSC	-	TC1301BDSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDSD	-	TC1301BDSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDSE	-	TC1301BDSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDSF	-	TC1301BDSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDT	-	TC1302BDTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDT	-	XC6119C34A7R	Vdet-IC	3.4V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BDTA	-	TC1301BDTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDTB	-	TC1301BDTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDTC	-	TC1301BDTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDTD	-	TC1301BDTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDTE	-	TC1301BDTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDTF	-	TC1301BDTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDU	-	TC1302BDUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDU	-	XC6119C35A7R	Vdet-IC	3.5V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BDUA	-	TC1301BDUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDUB	-	TC1301BDUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDUC	-	TC1301BDUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDUD	-	TC1301BDUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDUE	-	TC1301BDUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDUF	-	TC1301BDUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDV	-	TC1302BDVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDV	-	XC6119C36A7R	Vdet-IC	3.6V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BDVA	-	TC1301BDVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDVB	-	TC1301BDVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDVC	-	TC1301BDVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDVD	-	TC1301BDVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDVE	-	TC1301BDVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDVF	-	TC1301BDVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDW	-	TC1302BDWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BDWA	-	TC1301BDWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDWB	-	TC1301BDWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDWC	-	TC1301BDWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDWD	-	TC1301BDWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDWE	-	TC1301BDWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDWF	-	TC1301BDWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=3.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BDX	-	XC6119C37A7R	Vdet-IC	3.7V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BDY	-	XC6119C38A7R	Vdet-IC	3.8V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BDZ	-	XC6119C39A7R	Vdet-IC	3.9V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BE	-	BZX884-C8V2	Z-diode	8.2V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
BE	-	RP104K181C5	LVR-IC	LDO, 1.85V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BE	-	RP105K101D	LVR-IC	LDO, 1.0V±15mV, 400mA, +CE, CL	DFN1212-6	52zd	VR11	9a	Ric
BE	-	RT9193-2HPQW	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
BE	-	XC6221B1517R	LVR-IC	LDO, 1.5V±20mV, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BE	-	XC6223D24B9R-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BE	-	XC9244A2CC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.25V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BE0	-	XC9237F40C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BE0	-	XC9237F40C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BE0	-	XC9237F40CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BE416	-	XC6114E416ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE417	-	XC6114E417ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE418	-	XC6114E418ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE419	-	XC6114E419ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE420	-	XC6114E420ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE421	-	XC6114E421ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE422	-	XC6114E422ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE423	-	XC6114E423ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE424	-	XC6114E424ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE425	-	XC6114E425ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE426	-	XC6114E426ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE427	-	XC6114E427ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE428	-	XC6114E428ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE429	-	XC6114E429ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE430	-	XC6114E430ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE431	-	XC6114E431ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE432	-	XC6114E432ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE433	-	XC6114E433ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE434	-	XC6114E434ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE435	-	XC6114E435ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE436	-	XC6114E436ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE437	-	XC6114E437ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE438	-	XC6114E438ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE439	-	XC6114E439ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE440	-	XC6114E440ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE441	-	XC6114E441ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE442	-	XC6114E442ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE443	-	XC6114E443ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE444	-	XC6114E444ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE445	-	XC6114E445ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE446	-	XC6114E446ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE447	-	XC6114E447ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE448	-	XC6114E448ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE449	-	XC6114E449ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE450	-	XC6114E450ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE516	-	XC6114E516ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE517	-	XC6114E517ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE518	-	XC6114E518ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE519	-	XC6114E519ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE520	-	XC6114E520ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE521	-	XC6114E521ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE522	-	XC6114E522ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE523	-	XC6114E523ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE524	-	XC6114E524ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE525	-	XC6114E525ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE526	-	XC6114E526ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE527	-	XC6114E527ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE528	-	XC6114E528ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE529	-	XC6114E529ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE530	-	XC6114E530ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE531	-	XC6114E531ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE532	-	XC6114E532ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE533	-	XC6114E533ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE534	-	XC6114E534ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE535	-	XC6114E535ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE536	-	XC6114E536ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE537	-	XC6114E537ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE538	-	XC6114E538ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE539	-	XC6114E539ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE540	-	XC6114E540ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE541	-	XC6114E541ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE542	-	XC6114E542ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE543	-	XC6114E543ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE544	-	XC6114E544ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE545	-	XC6114E545ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE546	-	XC6114E546ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE547	-	XC6114E547ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE548	-	XC6114E548ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BE549	-	XC6114E549ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE550	-	XC6114E550ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE616	-	XC6114E616ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE617	-	XC6114E617ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE618	-	XC6114E618ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE619	-	XC6114E619ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE620	-	XC6114E620ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE621	-	XC6114E621ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE622	-	XC6114E622ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE623	-	XC6114E623ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE624	-	XC6114E624ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE625	-	XC6114E625ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE626	-	XC6114E626ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE627	-	XC6114E627ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE628	-	XC6114E628ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE629	-	XC6114E629ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE630	-	XC6114E630ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE631	-	XC6114E631ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE632	-	XC6114E632ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE633	-	XC6114E633ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE634	-	XC6114E634ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE635	-	XC6114E635ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE636	-	XC6114E636ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE637	-	XC6114E637ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE638	-	XC6114E638ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE639	-	XC6114E639ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE640	-	XC6114E640ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE641	-	XC6114E641ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE642	-	XC6114E642ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE643	-	XC6114E643ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE644	-	XC6114E644ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE645	-	XC6114E645ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE646	-	XC6114E646ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE647	-	XC6114E647ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE648	-	XC6114E648ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE649	-	XC6114E649ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE650	-	XC6114E650ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD19	9b	Tor
BE8	-	XC9260B08DER-G	DC-DC-IC	PWM step-down, 0.8V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BE9	-	XC9260B09DER-G	DC-DC-IC	PWM step-down, 0.9V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BEA	-	TC1302BEAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEAA	-	TC1301BEAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEAB	-	TC1301BEABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEAC	-	TC1301BEACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEAD	-	TC1301BEADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEAE	-	TC1301BEAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEAF	-	TC1301BEAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEB	-	TC1302BEBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEBA	-	TC1301BEBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEBB	-	TC1301BEBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEBC	-	TC1301BEBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEBD	-	TC1301BEBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEBE	-	TC1301BEBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEBF	-	TC1301BEBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEC	-	TC1302BECVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BECA	-	TC1301BECAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BECB	-	TC1301BECBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BECC	-	TC1301BECCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BECD	-	TC1301BECDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BECE	-	TC1301BECEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BECF	-	TC1301BECFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BED	-	TC1302BEDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEDA	-	TC1301BEDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEDB	-	TC1301BEDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEDC	-	TC1301BEDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEDD	-	TC1301BEDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEDE	-	TC1301BEDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEDF	-	TC1301BEDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEE	-	TC1302BEEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEEA	-	TC1301BEEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEEB	-	TC1301BEEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BEEC	-	TC1301BEECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEED	-	TC1301BEEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEEE	-	TC1301BEEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEEF	-	TC1301BEEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEF	-	TC1302BEFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEFA	-	TC1301BEFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEFB	-	TC1301BEFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEFC	-	TC1301BEFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEFD	-	TC1301BEFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEFE	-	TC1301BEFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEFF	-	TC1301BEFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEG	-	TC1302BEGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEGA	-	TC1301BEGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEGB	-	TC1301BEGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEGC	-	TC1301BEGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEGD	-	TC1301BEGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEGE	-	TC1301BEGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEGF	-	TC1301BEGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEH	-	TC1302BEHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEHA	-	TC1301BEHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEHB	-	TC1301BEHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEHC	-	TC1301BEHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEHD	-	TC1301BEHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEHE	-	TC1301BEHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEHF	-	TC1301BEHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEI	-	TC1302BEIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEIA	-	TC1301BEIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEIB	-	TC1301BEIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEIC	-	TC1301BEICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEID	-	TC1301BEIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEIE	-	TC1301BEIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEIF	-	TC1301BEIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEJ	-	TC1302BEJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEJA	-	TC1301BEJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEJB	-	TC1301BEJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEJC	-	TC1301BEJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEJD	-	TC1301BEJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEJE	-	TC1301BEJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEJF	-	TC1301BEJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEK	-	TC1302BEKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEKA	-	TC1301BEKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEKB	-	TC1301BEKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEKC	-	TC1301BEKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEKD	-	TC1301BEKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEKE	-	TC1301BEKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEKF	-	TC1301BEKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEL	-	TC1302BELVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEL	-	XC9260B0LDER-G	DC-DC-IC	PWM step-down, 0.85V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BELA	-	TC1301BELAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BELB	-	TC1301BELBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BELC	-	TC1301BELCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BELD	-	TC1301BELDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BELE	-	TC1301BELEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BELF	-	TC1301BELFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEM	-	TC1302BEMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEM	-	XC9260B0MDER-G	DC-DC-IC	PWM step-down, 0.95V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BEMA	-	TC1301BEMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEMB	-	TC1301BEMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEMC	-	TC1301BEMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEMD	-	TC1301BEMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEME	-	TC1301BEMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEMF	-	TC1301BEMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEN	-	TC1302BENVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEN	-	XC6119C40A7R	Vdet-IC	4.0V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BENA	-	TC1301BENAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BENB	-	TC1301BENBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BENC	-	TC1301BENCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEND	-	TC1301BENDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BENE	-	TC1301BENEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BENF	-	TC1301BENFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BEO	-	TC1302BEOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEOA	-	TC1301BEOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEOB	-	TC1301BEOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEOC	-	TC1301BEOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEOD	-	TC1301BEODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEOE	-	TC1301BEOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEOF	-	TC1301BEOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEP	-	TC1302BEPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEP	-	XC6119C41A7R	Vdet-IC	4.1V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BEPA	-	TC1301BEPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEPB	-	TC1301BEPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEPC	-	TC1301BEPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEPD	-	TC1301BEPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEPE	-	TC1301BEPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEPF	-	TC1301BEPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEQ	-	TC1302BEQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEQA	-	TC1301BEQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEQB	-	TC1301BEQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEQC	-	TC1301BEQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEQD	-	TC1301BEQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEQE	-	TC1301BEQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEQF	-	TC1301BEQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BER	-	TC1302BERVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BER	-	XC6119C42A7R	Vdet-IC	4.2V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BERA	-	TC1301BERAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BERB	-	TC1301BERBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BERC	-	TC1301BERCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BERD	-	TC1301BERDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BERE	-	TC1301BEREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BERF	-	TC1301BERFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BES	-	TC1302BESVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BES	-	XC6119C43A7R	Vdet-IC	4.3V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BESA	-	TC1301BESAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BESB	-	TC1301BESBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BESC	-	TC1301BESCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BESD	-	TC1301BESDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BESE	-	TC1301BESEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BESF	-	TC1301BESFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BET	-	TC1302BETVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BET	-	XC6119C44A7R	Vdet-IC	4.4V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BETA	-	TC1301BETAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BETB	-	TC1301BETBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BETC	-	TC1301BETCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BETD	-	TC1301BETDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BETE	-	TC1301BETEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BETF	-	TC1301BETFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEU	-	TC1302BEUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEU	-	XC6119C45A7R	Vdet-IC	4.5V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BEUA	-	TC1301BEUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEUB	-	TC1301BEUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEUC	-	TC1301BEUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEUD	-	TC1301BEUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEUE	-	TC1301BEUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEUF	-	TC1301BEUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEV	-	TC1302BEVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEV	-	XC6119C46A7R	Vdet-IC	4.6V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BEVA	-	TC1301BEVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEVB	-	TC1301BEVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEVC	-	TC1301BEVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEVD	-	TC1301BEVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEVE	-	TC1301BEVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEVF	-	TC1301BEVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEW	-	TC1302BEWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BEWA	-	TC1301BEWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEWB	-	TC1301BEWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEWC	-	TC1301BEWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEWD	-	TC1301BEWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEWE	-	TC1301BEWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEWF	-	TC1301BEWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BEX	-	XC6119C47A7R	Vdet-IC	4.7V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BEY	-	XC6119C48A7R	Vdet-IC	4.8V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BEZ	-	XC6119C49A7R	Vdet-IC	4.9V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BF	-	BZX884-C9V1	Z-diode	9.1V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
BF	-	RP104K191C	LVR-IC	LDO, 1.9V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BF	-	RP105K121D	LVR-IC	LDO, 1.2V±15mV, 400mA, +CE, CL	DFN1212-6	52zd	VR11	9a	Ric
BF	-	RT9193-33PQW	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
BF	-	XC6221B1617R	LVR-IC	LDO, 1.6V±20mV, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BF	-	XC6223D25B9R-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BF	-	XC9244A2DC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.35V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BF0	-	XC9260B10DER-G	DC-DC-IC	PWM step-down, 1.0V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BF1	-	XC9260B11DER-G	DC-DC-IC	PWM step-down, 1.1V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BF2	-	XC9260B12DER-G	DC-DC-IC	PWM step-down, 1.2V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BF3	-	XC9260B13DER-G	DC-DC-IC	PWM step-down, 1.3V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BF4	-	XC9260B14DER-G	DC-DC-IC	PWM step-down, 1.4V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BF5	-	XC9260B15DER-G	DC-DC-IC	PWM step-down, 1.5V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BF516	-	XC6114F516ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF517	-	XC6114F517ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF518	-	XC6114F518ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF519	-	XC6114F519ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF520	-	XC6114F520ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF521	-	XC6114F521ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF522	-	XC6114F522ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF523	-	XC6114F523ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF524	-	XC6114F524ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF525	-	XC6114F525ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF526	-	XC6114F526ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF527	-	XC6114F527ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF528	-	XC6114F528ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF529	-	XC6114F529ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF530	-	XC6114F530ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF531	-	XC6114F531ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF532	-	XC6114F532ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF533	-	XC6114F533ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF534	-	XC6114F534ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF535	-	XC6114F535ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF536	-	XC6114F536ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF537	-	XC6114F537ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF538	-	XC6114F538ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF539	-	XC6114F539ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF540	-	XC6114F540ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF541	-	XC6114F541ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF542	-	XC6114F542ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF543	-	XC6114F543ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF544	-	XC6114F544ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF545	-	XC6114F545ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF546	-	XC6114F546ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF547	-	XC6114F547ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF548	-	XC6114F548ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF549	-	XC6114F549ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF550	-	XC6114F550ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF6	-	XC9260B16DER-G	DC-DC-IC	PWM step-down, 1.6V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BF616	-	XC6114F616ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF617	-	XC6114F617ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF618	-	XC6114F618ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF619	-	XC6114F619ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF620	-	XC6114F620ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF621	-	XC6114F621ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF622	-	XC6114F622ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF623	-	XC6114F623ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF624	-	XC6114F624ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF625	-	XC6114F625ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF626	-	XC6114F626ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF627	-	XC6114F627ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF628	-	XC6114F628ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF629	-	XC6114F629ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF630	-	XC6114F630ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF631	-	XC6114F631ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF632	-	XC6114F632ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF633	-	XC6114F633ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF634	-	XC6114F634ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BF635	-	XC6114F635ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF636	-	XC6114F636ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF637	-	XC6114F637ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF638	-	XC6114F638ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF639	-	XC6114F639ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF640	-	XC6114F640ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF641	-	XC6114F641ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF642	-	XC6114F642ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF643	-	XC6114F643ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF644	-	XC6114F644ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF645	-	XC6114F645ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF646	-	XC6114F646ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF647	-	XC6114F647ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF648	-	XC6114F648ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF649	-	XC6114F649ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF650	-	XC6114F650ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD19	9b	Tor
BF7	-	XC9260B17DER-G	DC-DC-IC	PWM step-down, 1.7V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BF8	-	XC9237F08D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BF8	-	XC9237F08D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BF8	-	XC9237F08DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BF8	-	XC9260B18DER-G	DC-DC-IC	PWM step-down, 1.8V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BF9	-	XC9237F09D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BF9	-	XC9237F09D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BF9	-	XC9237F09DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BF9	-	XC9260B19DER-G	DC-DC-IC	PWM step-down, 1.9V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BFA	-	TC1302BFAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFA	-	XC9260B1ADER-G	DC-DC-IC	PWM step-down, 1.05V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BFAA	-	TC1301BFAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFAB	-	TC1301BFABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFAC	-	TC1301BFACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFAD	-	TC1301BFADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFAE	-	TC1301BFAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFAF	-	TC1301BFAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFB	-	TC1302BFBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFB	-	XC9260B1BDER-G	DC-DC-IC	PWM step-down, 1.15V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BFBA	-	TC1301BFBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFBB	-	TC1301BFBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFBC	-	TC1301BFBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFBD	-	TC1301BFBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFBE	-	TC1301BFBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFBF	-	TC1301BFBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFC	-	TC1302BFCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFC	-	XC9260B1CDER-G	DC-DC-IC	PWM step-down, 1.25V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BFCA	-	TC1301BFCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFCB	-	TC1301BFCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFCC	-	TC1301BFCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFCD	-	TC1301BFCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFCE	-	TC1301BFCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFCF	-	TC1301BFCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFD	-	TC1302BFDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFD	-	XC9260B1DDER-G	DC-DC-IC	PWM step-down, 1.35VV±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BFDA	-	TC1301BFDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFDB	-	TC1301BFDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFDC	-	TC1301BFDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFDD	-	TC1301BFDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFDE	-	TC1301BFDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFDF	-	TC1301BFDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFE	-	TC1302BFEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFE	-	XC9260B1EDER-G	DC-DC-IC	PWM step-down, 1.45V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BFEA	-	TC1301BFEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFEB	-	TC1301BFEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFEC	-	TC1301BFECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFED	-	TC1301BFEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFEE	-	TC1301BFEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFEF	-	TC1301BFEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFF	-	TC1302BFFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFF	-	XC9260B1FDER-G	DC-DC-IC	PWM step-down, 1.55V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BFFA	-	TC1301BFFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFFB	-	TC1301BFFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFFC	-	TC1301BFFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BFFD	-	TC1301BFFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFFE	-	TC1301BFFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFFF	-	TC1301BFFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFG	-	TC1302BFGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFGA	-	TC1301BFGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFGB	-	TC1301BFGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFGC	-	TC1301BFGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFGD	-	TC1301BFGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFGE	-	TC1301BFGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFGF	-	TC1301BFGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFH	-	TC1302BFHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFH	-	XC9260B1HDER-G	DC-DC-IC	PWM step-down, 1.65V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BFHA	-	TC1301BFHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFHB	-	TC1301BFHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFHC	-	TC1301BFHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFHD	-	TC1301BFHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFHE	-	TC1301BFHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFHF	-	TC1301BFHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFI	-	TC1302BFIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFIA	-	TC1301BFIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFIB	-	TC1301BFIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFIC	-	TC1301BFICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFID	-	TC1301BFIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFIE	-	TC1301BFIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFIF	-	TC1301BFIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFJ	-	TC1302BFJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFJA	-	TC1301BFJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFJB	-	TC1301BFJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFJC	-	TC1301BFJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFJD	-	TC1301BFJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFJE	-	TC1301BFJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFJF	-	TC1301BFJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFK	-	TC1302BFKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFK	-	XC9260B1KDER-G	DC-DC-IC	PWM step-down, 1.75V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BFKA	-	TC1301BFKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFKB	-	TC1301BFKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFKC	-	TC1301BFKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFKD	-	TC1301BFKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFKE	-	TC1301BFKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFKF	-	TC1301BFKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFL	-	TC1302BFLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFL	-	XC9237F0LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BFL	-	XC9237F0LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BFL	-	XC9237F0LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BFL	-	XC9260B1LDER-G	DC-DC-IC	PWM step-down, 1.85V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BFLA	-	TC1301BFLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFLB	-	TC1301BFLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFLC	-	TC1301BFLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFLD	-	TC1301BFLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFLE	-	TC1301BFLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFLF	-	TC1301BFLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFM	-	TC1302BFMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFM	-	XC9237F0MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BFM	-	XC9237F0MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BFM	-	XC9237F0MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BFM	-	XC9260B1MDER-G	DC-DC-IC	PWM step-down, 1.95V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BFMA	-	TC1301BFMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFMB	-	TC1301BFMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFMC	-	TC1301BFMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFMD	-	TC1301BFMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFME	-	TC1301BFMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFMF	-	TC1301BFMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFN	-	TC1302BFNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFN	-	XC6119C50A7R	Vdet-IC	5.0V±2%, -Reset PPO	USPN-4	58rj	VD3	9h	Tor
BFNA	-	TC1301BFNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFNB	-	TC1301BFNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFNC	-	TC1301BFNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFND	-	TC1301BFNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFNE	-	TC1301BFNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFNF	-	TC1301BFNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BFO	-	TC1302BFOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFOA	-	TC1301BFOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFOB	-	TC1301BFOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFOC	-	TC1301BFOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFOD	-	TC1301BFODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFOE	-	TC1301BFOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFOF	-	TC1301BFOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFP	-	TC1302BFPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFPA	-	TC1301BFPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFPB	-	TC1301BFPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFPC	-	TC1301BFPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFPD	-	TC1301BFPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFPE	-	TC1301BFPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFPF	-	TC1301BFPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFQ	-	TC1302BFQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFQA	-	TC1301BFQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFQB	-	TC1301BFQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFQC	-	TC1301BFQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFQD	-	TC1301BFQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFQE	-	TC1301BFQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFQF	-	TC1301BFQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFR	-	TC1302BFRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFRA	-	TC1301BFRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFRB	-	TC1301BFRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFRC	-	TC1301BFRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFRD	-	TC1301BFRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFRE	-	TC1301BFREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFRF	-	TC1301BFRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFS	-	TC1302BFSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFSA	-	TC1301BFSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFSB	-	TC1301BFSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFSC	-	TC1301BFSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFSD	-	TC1301BFSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFSE	-	TC1301BFSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFSF	-	TC1301BFSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFT	-	TC1302BFTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFTA	-	TC1301BFTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFTB	-	TC1301BFTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFTC	-	TC1301BFTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFTD	-	TC1301BFTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFTE	-	TC1301BFTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFTF	-	TC1301BFTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFU	-	TC1302BFUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFUA	-	TC1301BFUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFUB	-	TC1301BFUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFUC	-	TC1301BFUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFUD	-	TC1301BFUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFUE	-	TC1301BFUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFUF	-	TC1301BFUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFV	-	TC1302BFVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFVA	-	TC1301BFVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFVB	-	TC1301BFVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFVC	-	TC1301BFVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFVD	-	TC1301BFVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFVE	-	TC1301BFVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFVF	-	TC1301BFVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFW	-	TC1302BFWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BFWA	-	TC1301BFWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFWB	-	TC1301BFWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFWC	-	TC1301BFWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFWD	-	TC1301BFWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFWE	-	TC1301BFWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BFWF	-	TC1301BFWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BG	-	BZX884-C10	Z-diode	10V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
BG	-	RP104K201C	LVR-IC	LDO, 2.0V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BG	-	RP105K131D	LVR-IC	LDO, 1.3V±15mV, 400mA, +CE, CL	DFN1212-6	52zd	VR11	9a	Ric
BG	-	SiP21106DVP-18-E3	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	TSC75-6L	91ub	VR7	9m	Vs
BGA	-	TC1302BGAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGAA	-	TC1301BGAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGAB	-	TC1301BGABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BGAC	-	TC1301BGACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGAD	-	TC1301BGADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGAE	-	TC1301BGAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGAF	-	TC1301BGAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGB	-	TC1302BGBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGBA	-	TC1301BGBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGBB	-	TC1301BGBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGBC	-	TC1301BGBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGBD	-	TC1301BGBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGBE	-	TC1301BGBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGBF	-	TC1301BGBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGC	-	TC1302BGCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGCA	-	TC1301BGCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGCB	-	TC1301BGCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGCC	-	TC1301BGCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGCD	-	TC1301BGCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGCE	-	TC1301BGCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGCF	-	TC1301BGCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGD	-	TC1302BGDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGDA	-	TC1301BGDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGDB	-	TC1301BGDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGDC	-	TC1301BGDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGDD	-	TC1301BGDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGDE	-	TC1301BGDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGDF	-	TC1301BGDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGE	-	TC1302BGEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGEA	-	TC1301BGEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGEB	-	TC1301BGEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGEC	-	TC1301BGECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGED	-	TC1301BGEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGEE	-	TC1301BGEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGEF	-	TC1301BGEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGF	-	MIC5321-1.8/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.5V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BGF	-	TC1302BGFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGFA	-	TC1301BGFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGFB	-	TC1301BGFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGFC	-	TC1301BGFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGFD	-	TC1301BGFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGFE	-	TC1301BGFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGFF	-	TC1301BGFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGG	-	MIC5321-1.8/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.8V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BGG	-	TC1302BGGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGGA	-	TC1301BGGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGGB	-	TC1301BGGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGGC	-	TC1301BGGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGGD	-	TC1301BGGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGGE	-	TC1301BGGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGGF	-	TC1301BGGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGH	-	TC1302BGHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGHA	-	TC1301BGHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGHB	-	TC1301BGHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGHC	-	TC1301BGHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGHD	-	TC1301BGHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGHE	-	TC1301BGHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGHF	-	TC1301BGHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGI	-	TC1302BGIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGIA	-	TC1301BGIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGIB	-	TC1301BGIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGIC	-	TC1301BGICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGID	-	TC1301BGIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGIE	-	TC1301BGIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGIF	-	TC1301BGIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGJ	-	TC1302BGJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGJA	-	TC1301BGJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGJB	-	TC1301BGJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGJC	-	TC1301BGJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGJD	-	TC1301BGJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGJE	-	TC1301BGJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGJF	-	TC1301BGJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGK	-	TC1302BGKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BGKA	-	TC1301BGKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGKB	-	TC1301BGKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGKC	-	TC1301BGKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGKD	-	TC1301BGKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGKE	-	TC1301BGKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGKF	-	TC1301BGKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGL	-	TC1302BGLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGLA	-	TC1301BGLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGLB	-	TC1301BGLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGLC	-	TC1301BGLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGLD	-	TC1301BGLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGLE	-	TC1301BGLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGLF	-	TC1301BGLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGM	-	TC1302BGMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGMA	-	TC1301BGMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGMB	-	TC1301BGMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGMC	-	TC1301BGMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGMD	-	TC1301BGMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGME	-	TC1301BGMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGMF	-	TC1301BGMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGN	-	TC1302BGNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGNA	-	TC1301BGNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGNB	-	TC1301BGNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGNC	-	TC1301BGNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGND	-	TC1301BGNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGNE	-	TC1301BGNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGNF	-	TC1301BGNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGO	-	TC1302BGOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGOA	-	TC1301BGOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGOB	-	TC1301BGOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGOC	-	TC1301BGOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGOD	-	TC1301BGODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGOE	-	TC1301BGOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGOF	-	TC1301BGOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGP	-	TC1302BGPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGPA	-	TC1301BGPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGPB	-	TC1301BGPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGPC	-	TC1301BGPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGPD	-	TC1301BGPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGPE	-	TC1301BGPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGPF	-	TC1301BGPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGQ	-	TC1302BGQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGQA	-	TC1301BGQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGQB	-	TC1301BGQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGQC	-	TC1301BGQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGQD	-	TC1301BGQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGQE	-	TC1301BGQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGQF	-	TC1301BGQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGR	-	TC1302BGRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGRA	-	TC1301BGRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGRB	-	TC1301BGRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGRC	-	TC1301BGRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGRD	-	TC1301BGRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGRE	-	TC1301BGREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGRF	-	TC1301BGRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGS	-	TC1302BGSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGSA	-	TC1301BGSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGSB	-	TC1301BGSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGSC	-	TC1301BGSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGSD	-	TC1301BGSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGSE	-	TC1301BGSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGSF	-	TC1301BGSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGT	-	TC1302BGTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGTA	-	TC1301BGTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGTB	-	TC1301BGTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGTC	-	TC1301BGTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGTD	-	TC1301BGTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGTE	-	TC1301BGTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGTF	-	TC1301BGTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGU	-	TC1302BGUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BGUA	-	TC1301BGUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGUB	-	TC1301BGUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGUC	-	TC1301BGUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGUD	-	TC1301BGUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGUE	-	TC1301BGUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGUF	-	TC1301BGUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGV	-	TC1302BGVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGVA	-	TC1301BGVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGVB	-	TC1301BGVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGVC	-	TC1301BGVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGVD	-	TC1301BGVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGVE	-	TC1301BGVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGVF	-	TC1301BGVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGW	-	MIC5321-1.8/1.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.6V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BGW	-	TC1302BGWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BGWA	-	TC1301BGWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGWB	-	TC1301BGWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGWC	-	TC1301BGWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGWD	-	TC1301BGWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGWE	-	TC1301BGWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BGWF	-	TC1301BGWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BH	-	BZX884-C11	Z-diode	11V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
BH	-	LD6805K/13H	LVR-IC	LDO, 1.3V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
BH	-	RP104K251C	LVR-IC	LDO, 2.5V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BH	-	RP105K141D	LVR-IC	LDO, 1.4V±15mV, 400mA, +CE, CL	DFN1212-6	52zd	VR11	9a	Ric
BH	-	XC6221B1717R	LVR-IC	LDO, 1.7V±20mV, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BH	-	XC6223D26B9R-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BH	-	XC9244A2EC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.45V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BH0	-	XC9237F10D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BH0	-	XC9237F10D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BH0	-	XC9237F10DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BH01	-	RP153L001B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BH1	-	XC9237F11D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BH1	-	XC9237F11D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BH1	-	XC9237F11DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BH2	-	XC9237F12D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BH2	-	XC9237F12D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BH2	-	XC9237F12DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BH3	-	XC9237F13D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BH3	-	XC9237F13D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BH3	-	XC9237F13DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BH4	-	XC9237F14D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BH4	-	XC9237F14D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BH4	-	XC9237F14DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BH5	-	XC9237F15D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BH5	-	XC9237F15D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BH5	-	XC9237F15DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BH6	-	XC9237F16D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BH6	-	XC9237F16D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BH6	-	XC9237F16DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BH616	-	XC6114H616ER	Vdet-IC	1.6V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH617	-	XC6114H617ER	Vdet-IC	1.7V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH618	-	XC6114H618ER	Vdet-IC	1.8V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH619	-	XC6114H619ER	Vdet-IC	1.9V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH620	-	XC6114H620ER	Vdet-IC	2.0V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH621	-	XC6114H621ER	Vdet-IC	2.1V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH622	-	XC6114H622ER	Vdet-IC	2.2V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH623	-	XC6114H623ER	Vdet-IC	2.3V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH624	-	XC6114H624ER	Vdet-IC	2.4V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH625	-	XC6114H625ER	Vdet-IC	2.5V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH626	-	XC6114H626ER	Vdet-IC	2.6V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH627	-	XC6114H627ER	Vdet-IC	2.7V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH628	-	XC6114H628ER	Vdet-IC	2.8V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH629	-	XC6114H629ER	Vdet-IC	2.9V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH630	-	XC6114H630ER	Vdet-IC	3.0V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH631	-	XC6114H631ER	Vdet-IC	3.1V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH632	-	XC6114H632ER	Vdet-IC	3.2V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH633	-	XC6114H633ER	Vdet-IC	3.3V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH634	-	XC6114H634ER	Vdet-IC	3.4V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH635	-	XC6114H635ER	Vdet-IC	3.5V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BH636	-	XC6114H636ER	Vdet-IC	3.6V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH637	-	XC6114H637ER	Vdet-IC	3.7V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH638	-	XC6114H638ER	Vdet-IC	3.8V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH639	-	XC6114H639ER	Vdet-IC	3.9V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH640	-	XC6114H640ER	Vdet-IC	4.0V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH641	-	XC6114H641ER	Vdet-IC	4.1V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH642	-	XC6114H642ER	Vdet-IC	4.2V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH643	-	XC6114H643ER	Vdet-IC	4.3V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH644	-	XC6114H644ER	Vdet-IC	4.4V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH645	-	XC6114H645ER	Vdet-IC	4.5V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH646	-	XC6114H646ER	Vdet-IC	4.6V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH647	-	XC6114H647ER	Vdet-IC	4.7V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH648	-	XC6114H648ER	Vdet-IC	4.8V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH649	-	XC6114H649ER	Vdet-IC	4.9V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH650	-	XC6114H650ER	Vdet-IC	5.0V±2%, ±Reset PPO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD19	9b	Tor
BH7	-	XC9237F17D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BH7	-	XC9237F17D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BH7	-	XC9237F17DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BH8	-	XC9237F18D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BH8	-	XC9237F18D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BH8	-	XC9237F18DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BH9	-	XC9237F19D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BH9	-	XC9237F19D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BH9	-	XC9237F19DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BHA	-	TC1302BHAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHA	-	XC9237F1AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BHA	-	XC9237F1AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BHA	-	XC9237F1ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BHAA	-	TC1301BHAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHAB	-	TC1301BHABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHAC	-	TC1301BHACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHAD	-	TC1301BHADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHAE	-	TC1301BHAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHAF	-	TC1301BHAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHB	-	TC1302BHBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHB	-	XC9237F1BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BHB	-	XC9237F1BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BHB	-	XC9237F1BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BHBA	-	TC1301BHBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHBB	-	TC1301BHBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHBC	-	TC1301BHBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHBD	-	TC1301BHBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHBE	-	TC1301BHBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHBF	-	TC1301BHBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHC	-	TC1302BHCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHC	-	XC9237F1CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BHC	-	XC9237F1CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BHC	-	XC9237F1CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BHCA	-	TC1301BHCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHCB	-	TC1301BHCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHCC	-	TC1301BHCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHCD	-	TC1301BHCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHCE	-	TC1301BHCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHCF	-	TC1301BHCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHD	-	TC1302BHDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHD	-	XC9237F1DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BHD	-	XC9237F1DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BHD	-	XC9237F1DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BHDA	-	TC1301BHDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHDB	-	TC1301BHDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHDC	-	TC1301BHDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHDD	-	TC1301BHDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHDE	-	TC1301BHDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHDF	-	TC1301BHDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHE	-	TC1302BHEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHE	-	XC9237F1ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BHE	-	XC9237F1ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BHE	-	XC9237F1EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BHEA	-	TC1301BHEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHEB	-	TC1301BHEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BHEC	-	TC1301BHECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHED	-	TC1301BHEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHEE	-	TC1301BHEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHEF	-	TC1301BHEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHF	-	TC1302BHFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHF	-	XC9237F1FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BHF	-	XC9237F1FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BHF	-	XC9237F1FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BHFA	-	TC1301BHFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHFB	-	TC1301BHFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHFC	-	TC1301BHFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHFD	-	TC1301BHFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHFE	-	TC1301BHFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHFF	-	TC1301BHFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHG	-	TC1302BHGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHGA	-	TC1301BHGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHGB	-	TC1301BHGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHGC	-	TC1301BHGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHGD	-	TC1301BHGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHGE	-	TC1301BHGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHGF	-	TC1301BHGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHH	-	TC1302BHHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHH	-	XC9237F1HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BHH	-	XC9237F1HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BHH	-	XC9237F1HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BHHA	-	TC1301BHHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHHB	-	TC1301BHHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHHC	-	TC1301BHHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHHD	-	TC1301BHHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHHE	-	TC1301BHHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHHF	-	TC1301BHHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHI	-	TC1302BHIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHIA	-	TC1301BHIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHIB	-	TC1301BHIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHIC	-	TC1301BHICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHID	-	TC1301BHIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHIE	-	TC1301BHIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHIF	-	TC1301BHIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHJ	-	TC1302BHJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHJA	-	TC1301BHJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHJB	-	TC1301BHJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHJC	-	TC1301BHJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHJD	-	TC1301BHJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHJE	-	TC1301BHJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHJF	-	TC1301BHJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHK	-	TC1302BHKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHK	-	XC9237F1KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BHK	-	XC9237F1KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BHK	-	XC9237F1KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BHKA	-	TC1301BHKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHKB	-	TC1301BHKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHKC	-	TC1301BHKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHKD	-	TC1301BHKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHKE	-	TC1301BHKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHKF	-	TC1301BHKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHL	-	TC1302BHLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHL	-	XC9237F1LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BHL	-	XC9237F1LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BHL	-	XC9237F1LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BHLA	-	TC1301BHLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHLB	-	TC1301BHLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHLC	-	TC1301BHLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHLD	-	TC1301BHLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHLE	-	TC1301BHLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHLF	-	TC1301BHLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHM	-	TC1302BHMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHM	-	XC9237F1MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BHM	-	XC9237F1MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BHM	-	XC9237F1MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BHMA	-	TC1301BHMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BHMB	-	TC1301BHMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHMC	-	TC1301BHMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHMD	-	TC1301BHMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHME	-	TC1301BHMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHMF	-	TC1301BHMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHN	-	TC1302BHNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHNA	-	TC1301BHNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHNB	-	TC1301BHNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHNC	-	TC1301BHNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHND	-	TC1301BHNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHNE	-	TC1301BHNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHNF	-	TC1301BHNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHO	-	TC1302BHOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHOA	-	TC1301BHOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHOB	-	TC1301BHOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHOC	-	TC1301BHOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHOD	-	TC1301BHODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHOE	-	TC1301BHOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHOF	-	TC1301BHOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHP	-	TC1302BHPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHPA	-	TC1301BHPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHPB	-	TC1301BHPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHPC	-	TC1301BHPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHPD	-	TC1301BHPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHPE	-	TC1301BHPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHPF	-	TC1301BHPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHQ	-	TC1302BHQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHQA	-	TC1301BHQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHQB	-	TC1301BHQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHQC	-	TC1301BHQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHQD	-	TC1301BHQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHQE	-	TC1301BHQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHQF	-	TC1301BHQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHR	-	TC1302BHRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHRA	-	TC1301BHRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHRB	-	TC1301BHRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHRC	-	TC1301BHRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHRD	-	TC1301BHRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHRE	-	TC1301BHREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHRF	-	TC1301BHRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHS	-	TC1302BHSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHSA	-	TC1301BHSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHSB	-	TC1301BHSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHSC	-	TC1301BHSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHSD	-	TC1301BHSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHSE	-	TC1301BHSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHSF	-	TC1301BHSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHT	-	TC1302BHTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHTA	-	TC1301BHTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHTB	-	TC1301BHTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHTC	-	TC1301BHTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHTD	-	TC1301BHTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHTE	-	TC1301BHTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHTF	-	TC1301BHTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHU	-	TC1302BHUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHUA	-	TC1301BHUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHUB	-	TC1301BHUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHUC	-	TC1301BHUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHUD	-	TC1301BHUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHUE	-	TC1301BHUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHUF	-	TC1301BHUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHV	-	TC1302BHVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHVA	-	TC1301BHVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHVB	-	TC1301BHVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHVC	-	TC1301BHVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHVD	-	TC1301BHVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHVE	-	TC1301BHVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHVF	-	TC1301BHVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHW	-	TC1302BHWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BHWA	-	TC1301BHWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BHWB	-	TC1301BHWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHWC	-	TC1301BHWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHWD	-	TC1301BHWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHWE	-	TC1301BHWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHWF	-	TC1301BHWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BHY	-	XC6119N08A7R	Vdet-IC	0.8V±30mV, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BHZ	-	XC6119N09A7R	Vdet-IC	0.9V±30mV, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BIA	-	TC1302BIAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIAA	-	TC1301BIAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIAB	-	TC1301BIABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIAC	-	TC1301BIACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIAD	-	TC1301BIADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIAE	-	TC1301BIAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIAF	-	TC1301BIAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIB	-	TC1302BIBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIBA	-	TC1301BIBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIBB	-	TC1301BIBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIBC	-	TC1301BIBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIBD	-	TC1301BIBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIBE	-	TC1301BIBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIBF	-	TC1301BIBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIC	-	TC1302BICVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BICA	-	TC1301BICAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BICB	-	TC1301BICBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BICC	-	TC1301BICCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BICD	-	TC1301BICDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BICE	-	TC1301BICEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BICF	-	TC1301BICFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BID	-	TC1302BIDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIDA	-	TC1301BIDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIDB	-	TC1301BIDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIDC	-	TC1301BIDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIDD	-	TC1301BIDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIDE	-	TC1301BIDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIDF	-	TC1301BIDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIE	-	TC1302BIEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIEA	-	TC1301BIEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIEB	-	TC1301BIEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIEC	-	TC1301BIECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIED	-	TC1301BIEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIEE	-	TC1301BIEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIEF	-	TC1301BIEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIF	-	TC1302BIFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIFA	-	TC1301BIFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIFB	-	TC1301BIFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIFC	-	TC1301BIFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIFD	-	TC1301BIFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIFE	-	TC1301BIFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIFF	-	TC1301BIFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIG	-	TC1302BIGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIGA	-	TC1301BIGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIGB	-	TC1301BIGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIGC	-	TC1301BIGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIGD	-	TC1301BIGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIGE	-	TC1301BIGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIGF	-	TC1301BIGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIH	-	TC1302BIHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIHA	-	TC1301BIHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIHB	-	TC1301BIHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIHC	-	TC1301BIHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIHD	-	TC1301BIHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIHE	-	TC1301BIHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIHF	-	TC1301BIHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BII	-	TC1302BIIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIIA	-	TC1301BIIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIIB	-	TC1301BIIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIIC	-	TC1301BIICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIID	-	TC1301BIIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIIE	-	TC1301BIIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIIF	-	TC1301BIIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BIJ	-	TC1302BIJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIJA	-	TC1301BIJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIJB	-	TC1301BIJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIJC	-	TC1301BIJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIJD	-	TC1301BIJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIJE	-	TC1301BIJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIJF	-	TC1301BIJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIK	-	TC1302BIKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIKA	-	TC1301BIKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIKB	-	TC1301BIKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIKC	-	TC1301BIKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIKD	-	TC1301BIKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIKE	-	TC1301BIKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIKF	-	TC1301BIKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIL	-	TC1302BILVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BILA	-	TC1301BILAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BILB	-	TC1301BILBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BILC	-	TC1301BILCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BILD	-	TC1301BILDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BILE	-	TC1301BILEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BILF	-	TC1301BILFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIM	-	TC1302BIMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIMA	-	TC1301BIMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIMB	-	TC1301BIMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIMC	-	TC1301BIMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIMD	-	TC1301BIMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIME	-	TC1301BIMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIMF	-	TC1301BIMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIN	-	TC1302BINVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BINA	-	TC1301BINAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BINB	-	TC1301BINBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BINC	-	TC1301BINCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIND	-	TC1301BINDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BINE	-	TC1301BINEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BINF	-	TC1301BINFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIO	-	TC1302BIOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIOA	-	TC1301BIOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIOB	-	TC1301BIOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIOC	-	TC1301BIOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIOD	-	TC1301BIODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIOE	-	TC1301BIOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIOF	-	TC1301BIOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIP	-	TC1302BIPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIPA	-	TC1301BIPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIPB	-	TC1301BIPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIPC	-	TC1301BIPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIPD	-	TC1301BIPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIPE	-	TC1301BIPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIPF	-	TC1301BIPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIQ	-	TC1302BIQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIQ	-	TPA2005D1DRB	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 1.4W(5V/8Ω), shutdown	DFN-8	92	AFP24	9a	Ti
BIQA	-	TC1301BIQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIQB	-	TC1301BIQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIQC	-	TC1301BIQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIQD	-	TC1301BIQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIQE	-	TC1301BIQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIQF	-	TC1301BIQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIR	-	TC1302BIRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIRA	-	TC1301BIRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIRB	-	TC1301BIRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIRC	-	TC1301BIRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIRD	-	TC1301BIRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIRE	-	TC1301BIREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIRF	-	TC1301BIRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIS	-	TC1302BISVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BISA	-	TC1301BISAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BISB	-	TC1301BISBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BISC	-	TC1301BISCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BISD	-	TC1301BISDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BISE	-	TC1301BISEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BISF	-	TC1301BISFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIT	-	TC1302BITVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BITA	-	TC1301BITAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BITB	-	TC1301BITBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BITC	-	TC1301BITCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BITD	-	TC1301BITDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BITE	-	TC1301BITEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BITF	-	TC1301BITFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIU	-	TC1302BIUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIUA	-	TC1301BIUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIUB	-	TC1301BIUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIUC	-	TC1301BIUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIUD	-	TC1301BIUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIUE	-	TC1301BIUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIUF	-	TC1301BIUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIV	-	TC1302BIVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIVA	-	TC1301BIVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIVB	-	TC1301BIVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIVC	-	TC1301BIVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIVD	-	TC1301BIVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIVE	-	TC1301BIVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIVF	-	TC1301BIVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIW	-	TC1302BIWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BIWA	-	TC1301BIWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIWB	-	TC1301BIWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIWC	-	TC1301BIWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIWD	-	TC1301BIWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIWE	-	TC1301BIWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BIWF	-	TC1301BIWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJ	-	BZX884-C12	Z-diode	12V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
BJ	-	RP104K261C	LVR-IC	LDO, 2.6V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BJ	-	RP105K151D	LVR-IC	LDO, 1.5V±15mV, 400mA, +CE, CL	DFN1212-6	52zd	VR11	9a	Ric
BJA	-	TC1302BJAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJAA	-	TC1301BJAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJAB	-	TC1301BJABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJAC	-	TC1301BJACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJAD	-	TC1301BJADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJAE	-	TC1301BJAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJAF	-	TC1301BJAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJB	-	TC1302BJBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJBA	-	TC1301BJBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJBB	-	TC1301BJBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJBC	-	TC1301BJBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJBD	-	TC1301BJBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJBE	-	TC1301BJBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJBF	-	TC1301BJBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJC	-	TC1302BJCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJCA	-	TC1301BJCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJCB	-	TC1301BJCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJCC	-	TC1301BJCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJCD	-	TC1301BJCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJCE	-	TC1301BJCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJCF	-	TC1301BJCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJD	-	TC1302BJDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJDA	-	TC1301BJDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJDB	-	TC1301BJDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJDC	-	TC1301BJDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJDD	-	TC1301BJDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJDE	-	TC1301BJDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJDF	-	TC1301BJDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJE	-	TC1302BJEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJEA	-	TC1301BJEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJEB	-	TC1301BJEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJEC	-	TC1301BJECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJED	-	TC1301BJEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJEE	-	TC1301BJEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJEF	-	TC1301BJEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJF	-	TC1302BJFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJFA	-	TC1301BJFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJFB	-	TC1301BJFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BJFC	-	TC1301BJFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJFD	-	TC1301BJFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJFE	-	TC1301BJFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJFF	-	TC1301BJFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJG	-	MIC5321-2.5/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.8V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BJG	-	TC1302BJGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJGA	-	TC1301BJGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJGB	-	TC1301BJGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJGC	-	TC1301BJGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJGD	-	TC1301BJGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJGE	-	TC1301BJGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJGF	-	TC1301BJGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJH	-	TC1302BJHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJHA	-	TC1301BJHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJHB	-	TC1301BJHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJHC	-	TC1301BJHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJHD	-	TC1301BJHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJHE	-	TC1301BJHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJHF	-	TC1301BJHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJI	-	TC1302BJIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJIA	-	TC1301BJIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJIB	-	TC1301BJIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJIC	-	TC1301BJICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJID	-	TC1301BJIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJIE	-	TC1301BJIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJIF	-	TC1301BJIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJJ	-	MIC5321-2.5/2.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.5V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BJJ	-	TC1302BJJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJJA	-	TC1301BJJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJJB	-	TC1301BJJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJJC	-	TC1301BJJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJJD	-	TC1301BJJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJJE	-	TC1301BJJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJJF	-	TC1301BJJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJK	-	TC1302BJKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJKA	-	TC1301BJKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJKB	-	TC1301BJKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJKC	-	TC1301BJKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJKD	-	TC1301BJKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJKE	-	TC1301BJKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJKF	-	TC1301BJKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJL	-	TC1302BJLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJLA	-	TC1301BJLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJLB	-	TC1301BJLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJLC	-	TC1301BJLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJLD	-	TC1301BJLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJLE	-	TC1301BJLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJLF	-	TC1301BJLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJM	-	TC1302BJMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJMA	-	TC1301BJMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJMB	-	TC1301BJMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJMC	-	TC1301BJMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJMD	-	TC1301BJMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJME	-	TC1301BJMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJMF	-	TC1301BJMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJN	-	TC1302BJNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJNA	-	TC1301BJNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJNB	-	TC1301BJNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJNC	-	TC1301BJNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJND	-	TC1301BJNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJNE	-	TC1301BJNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJNF	-	TC1301BJNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJO	-	TC1302BJOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJOA	-	TC1301BJOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJOB	-	TC1301BJOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJOC	-	TC1301BJOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJOD	-	TC1301BJODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJOE	-	TC1301BJOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJOF	-	TC1301BJOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJP	-	TC1302BJPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BJPA	-	TC1301BJPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJPB	-	TC1301BJPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJPC	-	TC1301BJPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJPD	-	TC1301BJPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJPE	-	TC1301BJPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJPF	-	TC1301BJPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJQ	-	TC1302BJQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJQA	-	TC1301BJQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJQB	-	TC1301BJQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJQC	-	TC1301BJQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJQD	-	TC1301BJQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJQE	-	TC1301BJQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJQF	-	TC1301BJQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJR	-	TC1302BJRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJRA	-	TC1301BJRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJRB	-	TC1301BJRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJRC	-	TC1301BJRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJRD	-	TC1301BJRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJRE	-	TC1301BJREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJRF	-	TC1301BJRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJS	-	TC1302BJSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJSA	-	TC1301BJSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJSB	-	TC1301BJSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJSC	-	TC1301BJSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJSD	-	TC1301BJSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJSE	-	TC1301BJSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJSF	-	TC1301BJSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJT	-	TC1302BJTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJTA	-	TC1301BJTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJTB	-	TC1301BJTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJTC	-	TC1301BJTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJTD	-	TC1301BJTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJTE	-	TC1301BJTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJTF	-	TC1301BJTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJU	-	TC1302BJUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJUA	-	TC1301BJUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJUB	-	TC1301BJUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJUC	-	TC1301BJUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJUD	-	TC1301BJUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJUE	-	TC1301BJUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJUF	-	TC1301BJUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJV	-	TC1302BJVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJVA	-	TC1301BJVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJVB	-	TC1301BJVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJVC	-	TC1301BJVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJVD	-	TC1301BJVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJVE	-	TC1301BJVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJVF	-	TC1301BJVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJW	-	TC1302BJWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BJWA	-	TC1301BJWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJWB	-	TC1301BJWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJWC	-	TC1301BJWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJWD	-	TC1301BJWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJWE	-	TC1301BJWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BJWF	-	TC1301BJWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.4V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BK	-	BZX884-C13	Z-diode	13V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
BK	-	RP104K271C	LVR-IC	LDO, 2.7V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BK	-	RP105K111D	LVR-IC	LDO, 1.1V±15mV, 400mA, +CE, CL	DFN1212-6	52zd	VR11	9a	Ric
BK	-	XC6221B1817R	LVR-IC	LDO, 1.8V±20mV, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BK	-	XC6223D27B9R-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BK	-	XC9244A2FC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.55V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BK0	-	XC9237F20D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BK0	-	XC9237F20D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BK0	-	XC9237F20DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BK1	-	XC9237F21D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BK1	-	XC9237F21D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BK1	-	XC9237F21DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BK2	-	XC9237F22D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BK2	-	XC9237F22D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BK2	-	XC9237F22DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BK3	-	XC9237F23D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BK3	-	XC9237F23D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BK3	-	XC9237F23DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BK4	-	XC9237F24D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BK4	-	XC9237F24D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BK4	-	XC9237F24DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BK5	-	XC9237F25D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BK5	-	XC9237F25D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BK5	-	XC9237F25DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BK6	-	XC9237F26D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BK6	-	XC9237F26D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BK6	-	XC9237F26DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BK7	-	XC9237F27D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BK7	-	XC9237F27D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BK7	-	XC9237F27DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BK8	-	XC9237F28D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BK8	-	XC9237F28D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BK8	-	XC9237F28DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BK9	-	XC9237F29D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BK9	-	XC9237F29D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BK9	-	XC9237F29DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BKA	-	TC1302BKAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKA	-	XC9237F2AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BKA	-	XC9237F2AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BKA	-	XC9237F2ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BKAA	-	TC1301BKAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKAB	-	TC1301BKABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKAC	-	TC1301BKACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKAD	-	TC1301BKADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKAE	-	TC1301BKAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKAF	-	TC1301BKAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKB	-	TC1302BKBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKB	-	XC9237F2BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BKB	-	XC9237F2BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BKB	-	XC9237F2BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BKBA	-	TC1301BKBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKBB	-	TC1301BKBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKBC	-	TC1301BKBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKBD	-	TC1301BKBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKBE	-	TC1301BKBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKBF	-	TC1301BKBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKC	-	TC1302BKCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKC	-	XC9237F2CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BKC	-	XC9237F2CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BKC	-	XC9237F2CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BKCA	-	TC1301BKCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKCB	-	TC1301BKCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKCC	-	TC1301BKCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKCD	-	TC1301BKCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKCE	-	TC1301BKCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKCF	-	TC1301BKCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKD	-	MIC5321-2.6/1.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/1.85±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BKD	-	TC1302BKDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKD	-	XC9237F2DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BKD	-	XC9237F2DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BKD	-	XC9237F2DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BKDA	-	TC1301BKDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKDB	-	TC1301BKDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKDC	-	TC1301BKDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKDD	-	TC1301BKDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKDE	-	TC1301BKDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKDF	-	TC1301BKDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKE	-	TC1302BKEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKE	-	XC9237F2ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BKE	-	XC9237F2ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BKE	-	XC9237F2EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BKEA	-	TC1301BKEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKEB	-	TC1301BKEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKEC	-	TC1301BKECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKED	-	TC1301BKEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BKEE	-	TC1301BKEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKEF	-	TC1301BKEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKF	-	TC1302BKFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKF	-	XC9237F2FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BKF	-	XC9237F2FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BKF	-	XC9237F2FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BKFA	-	TC1301BKFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKFB	-	TC1301BKFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKFC	-	TC1301BKFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKFD	-	TC1301BKFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKFE	-	TC1301BKFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKFF	-	TC1301BKFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKG	-	MIC5321-2.6/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/1.8V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BKG	-	TC1302BKGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKGA	-	TC1301BKGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKGB	-	TC1301BKGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKGC	-	TC1301BKGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKGD	-	TC1301BKGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKGE	-	TC1301BKGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKGF	-	TC1301BKGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKH	-	TC1302BKHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKH	-	XC9237F2HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BKH	-	XC9237F2HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BKH	-	XC9237F2HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BKHA	-	TC1301BKHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKHB	-	TC1301BKHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKHC	-	TC1301BKHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKHD	-	TC1301BKHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKHE	-	TC1301BKHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKHF	-	TC1301BKHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKI	-	TC1302BKIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKIA	-	TC1301BKIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKIB	-	TC1301BKIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKIC	-	TC1301BKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKID	-	TC1301BKIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKIE	-	TC1301BKIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKIF	-	TC1301BKIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKJ	-	TC1302BKJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKJA	-	TC1301BKJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKJB	-	TC1301BKJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKJC	-	TC1301BKJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKJD	-	TC1301BKJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKJE	-	TC1301BKJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKJF	-	TC1301BKJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKK	-	TC1302BKKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKK	-	XC9237F2KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BKK	-	XC9237F2KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BKK	-	XC9237F2KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BKKA	-	TC1301BKKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKKB	-	TC1301BKKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKKC	-	TC1301BKKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKKD	-	TC1301BKKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKKE	-	TC1301BKKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKKF	-	TC1301BKKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKL	-	TC1302BKLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKL	-	XC9237F2LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BKL	-	XC9237F2LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BKL	-	XC9237F2LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BKLA	-	TC1301BKLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKLB	-	TC1301BKLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKLC	-	TC1301BKLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKLD	-	TC1301BKLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKLE	-	TC1301BKLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKLF	-	TC1301BKLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKM	-	TC1302BKMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKM	-	XC9237F2MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BKM	-	XC9237F2MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BKM	-	XC9237F2MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BKMA	-	TC1301BKMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKMB	-	TC1301BKMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BKMC	-	TC1301BKMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKMD	-	TC1301BKMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKME	-	TC1301BKMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKMF	-	TC1301BKMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKN	-	TC1302BKNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKN	-	XC6119N10A7R	Vdet-IC	1.0V±30mV, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BKNA	-	TC1301BKNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKNB	-	TC1301BKNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKNC	-	TC1301BKNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKND	-	TC1301BKNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKNE	-	TC1301BKNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKNF	-	TC1301BKNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKO	-	TC1302BKOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKOA	-	TC1301BKOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKOB	-	TC1301BKOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKOC	-	TC1301BKOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKOD	-	TC1301BKODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKOE	-	TC1301BKOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKOF	-	TC1301BKOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKP	-	TC1302BKPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKP	-	XC6119N11A7R	Vdet-IC	1.1V±30mV, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BKPA	-	TC1301BKPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKPB	-	TC1301BKPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKPC	-	TC1301BKPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKPD	-	TC1301BKPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKPE	-	TC1301BKPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKPF	-	TC1301BKPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKQ	-	TC1302BKQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKQA	-	TC1301BKQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKQB	-	TC1301BKQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKQC	-	TC1301BKQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKQD	-	TC1301BKQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKQE	-	TC1301BKQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKQF	-	TC1301BKQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKR	-	TC1302BKRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKR	-	XC6119N12A7R	Vdet-IC	1.2V±30mV, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BKRA	-	TC1301BKRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKRB	-	TC1301BKRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKRC	-	TC1301BKRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKRD	-	TC1301BKRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKRE	-	TC1301BKREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKRF	-	TC1301BKRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKS	-	TC1302BKSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKS	-	XC6119N13A7R	Vdet-IC	1.3V±30mV, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BKSA	-	TC1301BKSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKSB	-	TC1301BKSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKSC	-	TC1301BKSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKSD	-	TC1301BKSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKSE	-	TC1301BKSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKSF	-	TC1301BKSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKT	-	TC1302BKTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKT	-	XC6119N14A7R	Vdet-IC	1.4V±30mV, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BKTA	-	TC1301BKTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKTB	-	TC1301BKTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKTC	-	TC1301BKTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKTD	-	TC1301BKTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKTE	-	TC1301BKTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKTF	-	TC1301BKTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKU	-	TC1302BKUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKU	-	XC6119N15A7R	Vdet-IC	1.5V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BKUA	-	TC1301BKUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKUB	-	TC1301BKUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKUC	-	TC1301BKUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKUD	-	TC1301BKUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKUE	-	TC1301BKUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKUF	-	TC1301BKUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKV	-	TC1302BKVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKV	-	XC6119N16A7R	Vdet-IC	1.6V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BKVA	-	TC1301BKVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKVB	-	TC1301BKVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BKVC	-	TC1301BKVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKVD	-	TC1301BKVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKVE	-	TC1301BKVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKVF	-	TC1301BKVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKW	-	TC1302BKWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BKWA	-	TC1301BKWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKWB	-	TC1301BKWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKWC	-	TC1301BKWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKWD	-	TC1301BKWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKWE	-	TC1301BKWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKWF	-	TC1301BKWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.3V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BKX	-	XC6119N17A7R	Vdet-IC	1.7V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BKY	-	XC6119N18A7R	Vdet-IC	1.8V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BKZ	-	MAX16056ATA17+	Vdet-IC	1.7V±2%, -MR, -Reset PPO, WDT	TDFN-8	92	-	9a	Max
BKZ	-	XC6119N19A7R	Vdet-IC	1.9V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
bl	-	BU1JUA3WNVX	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
BL	-	BZX884-C15	Z-diode	15V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
BL	-	RP104K281C	LVR-IC	LDO, 2.8V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BL	-	XC6221B1917R	LVR-IC	LDO, 1.9V±20mV, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BL	-	XC6223D28B9R-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BL	-	XC9244A2HC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.65V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BL0	-	XC9237F30D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BL0	-	XC9237F30D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BL0	-	XC9237F30DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BL0	-	XC9260B20DER-G	DC-DC-IC	PWM step-down, 2.0V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BL1	-	XC9237F31D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BL1	-	XC9237F31D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BL1	-	XC9237F31DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BL1	-	XC9260B21DER-G	DC-DC-IC	PWM step-down, 2.1V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BL2	-	XC9237F32D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BL2	-	XC9237F32D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BL2	-	XC9237F32DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BL2	-	XC9260B22DER-G	DC-DC-IC	PWM step-down, 2.2V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BL3	-	XC9237F33D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BL3	-	XC9237F33D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BL3	-	XC9237F33DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BL3	-	XC9260B23DER-G	DC-DC-IC	PWM step-down, 2.3V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BL4	-	XC9237F34D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BL4	-	XC9237F34D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BL4	-	XC9237F34DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BL4	-	XC9260B24DER-G	DC-DC-IC	PWM step-down, 2.4V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BL5	-	XC9237F35D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BL5	-	XC9237F35D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BL5	-	XC9237F35DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BL5	-	XC9260B25DER-G	DC-DC-IC	PWM step-down, 2.5V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BL6	-	XC9237F36D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BL6	-	XC9237F36D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BL6	-	XC9237F36DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BL6	-	XC9260B26DER-G	DC-DC-IC	PWM step-down, 2.6V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BL7	-	XC9237F37D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BL7	-	XC9237F37D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BL7	-	XC9237F37DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BL7	-	XC9260B27DER-G	DC-DC-IC	PWM step-down, 2.7V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BL8	-	XC9237F38D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BL8	-	XC9237F38D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BL8	-	XC9237F38DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BL8	-	XC9260B28DER-G	DC-DC-IC	PWM step-down, 2.8V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BL9	-	XC9237F39D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BL9	-	XC9237F39D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BL9	-	XC9237F39DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BL9	-	XC9260B29DER-G	DC-DC-IC	PWM step-down, 2.9V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BLA	-	MAX16056ATA23+	Vdet-IC	2.3V±2%, -MR, -Reset PPO, WDT	TDFN-8	92	-	9a	Max
BLA	-	TC1302BLAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLA	-	XC9237F3AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BLA	-	XC9237F3AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BLA	-	XC9237F3ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BLA	-	XC9260B2ADER-G	DC-DC-IC	PWM step-down, 2.05V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BLAA	-	TC1301BLAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLAB	-	TC1301BLABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLAC	-	TC1301BLACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BLAD	-	TC1301BLADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLAE	-	TC1301BLAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLAF	-	TC1301BLAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLB	-	MAX16056ATA26+	Vdet-IC	2.6V±2%, -MR, -Reset PPO, WDT	TDFN-8	92	-	9a	Max
BLB	-	TC1302BLBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLB	-	XC9237F3BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BLB	-	XC9237F3BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BLB	-	XC9237F3BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BLB	-	XC9260B2BDER-G	DC-DC-IC	PWM step-down, 2.15V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BLBA	-	TC1301BLBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLBB	-	TC1301BLBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLBC	-	TC1301BLBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLBD	-	TC1301BLBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLBE	-	TC1301BLBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLBF	-	TC1301BLBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLC	-	MAX16056ATA29+	Vdet-IC	2.9V±2%, -MR, -Reset PPO, WDT	TDFN-8	92	-	9a	Max
BLC	-	TC1302BLCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLC	-	XC9237F3CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BLC	-	XC9237F3CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BLC	-	XC9237F3CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BLC	-	XC9260B2CDER-G	DC-DC-IC	PWM step-down, 2.25V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BLCA	-	TC1301BLCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLCB	-	TC1301BLCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLCC	-	TC1301BLCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLCD	-	TC1301BLCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLCE	-	TC1301BLCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLCF	-	TC1301BLCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLD	-	MAX16056ATA31+	Vdet-IC	3.1V±2%, -MR, -Reset PPO, WDT	TDFN-8	92	-	9a	Max
BLD	-	TC1302BLDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLD	-	XC9237F3DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BLD	-	XC9237F3DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BLD	-	XC9237F3DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BLD	-	XC9260B2DDER-G	DC-DC-IC	PWM step-down, 2.35V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BLDA	-	TC1301BLDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLDB	-	TC1301BLDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLDC	-	TC1301BLDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLDD	-	TC1301BLDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLDE	-	TC1301BLDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLDF	-	TC1301BLDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLE	-	MAX16056ATA46+	Vdet-IC	4.6V±2%, -MR, -Reset PPO, WDT	TDFN-8	92	-	9a	Max
BLE	-	TC1302BLEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLE	-	XC9237F3ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BLE	-	XC9237F3ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BLE	-	XC9237F3EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BLE	-	XC9260B2EDER-G	DC-DC-IC	PWM step-down, 2.45V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BLEA	-	TC1301BLEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLEB	-	TC1301BLEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLEC	-	TC1301BLECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLED	-	TC1301BLEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLEE	-	TC1301BLEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLEF	-	TC1301BLEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLF	-	MAX16058ATA16+	Vdet-IC	1.6V±2%, -MR, -Reset ODO, WDT	TDFN-8	92	-	9a	Max
BLF	-	TC1302BLFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLF	-	XC9237F3FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BLF	-	XC9237F3FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BLF	-	XC9237F3FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BLF	-	XC9260B2FDER-G	DC-DC-IC	PWM step-down, 2.55V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BLFA	-	TC1301BLFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLFB	-	TC1301BLFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLFC	-	TC1301BLFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLFD	-	TC1301BLFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLFE	-	TC1301BLFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLFF	-	TC1301BLFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLG	-	MAX16058ATA22+	Vdet-IC	2.2V±2%, -MR, -Reset ODO, WDT	TDFN-8	92	-	9a	Max
BLG	-	TC1302BLGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLGA	-	TC1301BLGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLGB	-	TC1301BLGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLGC	-	TC1301BLGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLGD	-	TC1301BLGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLGE	-	TC1301BLGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BLGF	-	TC1301BLGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLH	-	MAX16058ATA26+	Vdet-IC	2.6V±2%, -MR, -Reset ODO, WDT	TDFN-8	92	-	9a	Max
BLH	-	TC1302BLHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLH	-	XC9237F3HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BLH	-	XC9237F3HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BLH	-	XC9237F3HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BLH	-	XC9260B2HDER-G	DC-DC-IC	PWM step-down, 2.65V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BLHA	-	TC1301BLHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLHB	-	TC1301BLHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLHC	-	TC1301BLHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLHD	-	TC1301BLHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLHE	-	TC1301BLHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLHF	-	TC1301BLHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLI	-	MAX16058ATA29+	Vdet-IC	2.9V±2%, -MR, -Reset ODO, WDT	TDFN-8	92	-	9a	Max
BLI	-	TC1302BLIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLIA	-	TC1301BLIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLIB	-	TC1301BLIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLIC	-	TC1301BLICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLID	-	TC1301BLIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLIE	-	TC1301BLIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLIF	-	TC1301BLIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLJ	-	MAX16058ATA31+	Vdet-IC	3.1V±2%, -MR, -Reset ODO, WDT	TDFN-8	92	-	9a	Max
BLJ	-	TC1302BLJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLJA	-	TC1301BLJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLJB	-	TC1301BLJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLJC	-	TC1301BLJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLJD	-	TC1301BLJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLJE	-	TC1301BLJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLJF	-	TC1301BLJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLK	-	MAX16058ATA44+	Vdet-IC	4.4V±2%, -MR, -Reset ODO, WDT	TDFN-8	92	-	9a	Max
BLK	-	TC1302BLKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLK	-	XC9237F3KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BLK	-	XC9237F3KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BLK	-	XC9237F3KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BLK	-	XC9260B2KDER-G	DC-DC-IC	PWM step-down, 2.75V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BLKA	-	TC1301BLKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLKB	-	TC1301BLKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLKC	-	TC1301BLKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLKD	-	TC1301BLKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLKE	-	TC1301BLKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLKF	-	TC1301BLKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLL	-	MIC5321-2.7/2.7YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.7V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BLL	-	TC1302BLLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLL	-	XC9237F3LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BLL	-	XC9237F3LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BLL	-	XC9237F3LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BLL	-	XC9260B2LDER-G	DC-DC-IC	PWM step-down, 2.85V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BLLA	-	TC1301BLLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLLB	-	TC1301BLLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLLC	-	TC1301BLLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLLD	-	TC1301BLLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLLE	-	TC1301BLLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLLF	-	TC1301BLLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLM	-	TC1302BLMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLM	-	XC9237F3MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BLM	-	XC9237F3MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BLM	-	XC9237F3MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BLM	-	XC9260B2MDER-G	DC-DC-IC	PWM step-down, 2.95V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BLMA	-	TC1301BLMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLMB	-	TC1301BLMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLMC	-	TC1301BLMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLMD	-	TC1301BLMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLME	-	TC1301BLMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLMF	-	TC1301BLMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLN	-	TC1302BLNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLN	-	XC6119N20A7R	Vdet-IC	2.0V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BLNA	-	TC1301BLNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLNB	-	TC1301BLNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLNC	-	TC1301BLNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLND	-	TC1301BLNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BLNE	-	TC1301BLNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLNF	-	TC1301BLNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLO	-	TC1302BLOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLOA	-	TC1301BLOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLOB	-	TC1301BLOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLOC	-	TC1301BLOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLOD	-	TC1301BLODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLOE	-	TC1301BLOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLOF	-	TC1301BLOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLP	-	TC1302BLPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLP	-	XC6119N21A7R	Vdet-IC	2.1V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BLPA	-	TC1301BLPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLPB	-	TC1301BLPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLPC	-	TC1301BLPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLPD	-	TC1301BLPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLPE	-	TC1301BLPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLPF	-	TC1301BLPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLQ	-	TC1302BLQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLQA	-	TC1301BLQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLQB	-	TC1301BLQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLQC	-	TC1301BLQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLQD	-	TC1301BLQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLQE	-	TC1301BLQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLQF	-	TC1301BLQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLR	-	TC1302BLRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLR	-	XC6119N22A7R	Vdet-IC	2.2V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BLRA	-	TC1301BLRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLRB	-	TC1301BLRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLRC	-	TC1301BLRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLRD	-	TC1301BLRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLRE	-	TC1301BLREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLRF	-	TC1301BLRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLS	-	TC1302BLSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLS	-	XC6119N23A7R	Vdet-IC	2.3V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BLSA	-	TC1301BLSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLSB	-	TC1301BLSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLSC	-	TC1301BLSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLSD	-	TC1301BLSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLSE	-	TC1301BLSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLSF	-	TC1301BLSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLT	-	TC1302BLTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLT	-	XC6119N24A7R	Vdet-IC	2.4V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BLTA	-	TC1301BLTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLTB	-	TC1301BLTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLTC	-	TC1301BLTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLTD	-	TC1301BLTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLTE	-	TC1301BLTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLTF	-	TC1301BLTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLU	-	TC1302BLUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLU	-	XC6119N25A7R	Vdet-IC	2.5V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BLUA	-	TC1301BLUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLUB	-	TC1301BLUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLUC	-	TC1301BLUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLUD	-	TC1301BLUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLUE	-	TC1301BLUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLUF	-	TC1301BLUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLV	-	TC1302BLVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLV	-	XC6119N26A7R	Vdet-IC	2.6V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BLVA	-	TC1301BLVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLVB	-	TC1301BLVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLVC	-	TC1301BLVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLVD	-	TC1301BLVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLVE	-	TC1301BLVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLVF	-	TC1301BLVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLW	-	TC1302BLWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BLWA	-	TC1301BLWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLWB	-	TC1301BLWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLWC	-	TC1301BLWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLWD	-	TC1301BLWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLWE	-	TC1301BLWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BLWF	-	TC1301BLWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.2V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BLX	-	XC6119N27A7R	Vdet-IC	2.7V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BLY	-	XC6119N28A7R	Vdet-IC	2.8V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BLZ	-	XC6119N29A7R	Vdet-IC	2.9V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
bM	-	74CBTLV1G125GM	CMOS-Log	Bus buffer gate with 3-state output	SOT886	57	Log14	9z	Nxp
BM	-	RP104K281C5	LVR-IC	LDO, 2.85V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BM	-	XC6221B2017R	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BM	-	XC6223D29B9R-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BM	-	XC9244A2KC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.75V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BM0	-	XC9237F40D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
BM0	-	XC9237F40D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56da	DC16	9a	Tor
BM0	-	XC9237F40DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49da	DC16	9a	Tor
BM0	-	XC9260B30DER-G	DC-DC-IC	PWM step-down, 3.0V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BM01	-	RP154L001A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM02	-	RP154L002A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM03	-	RP154L003A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM04	-	RP154L004A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM05	-	RP154L005A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM06	-	RP154L006A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM07	-	RP154L007A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM08	-	RP154L008A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM09	-	RP154L009A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM1	-	XC9260B31DER-G	DC-DC-IC	PWM step-down, 3.1V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BM10	-	RP154L010A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM11	-	RP154L011A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM12	-	RP154L012A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM13	-	RP154L013A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM14	-	RP154L014A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM15	-	RP154L015A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM16	-	RP154L016A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM17	-	RP154L017A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM18	-	RP154L018A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM19	-	RP154L019A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM2	-	XC9260B32DER-G	DC-DC-IC	PWM step-down, 3.2V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BM20	-	RP154L020A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM21	-	RP154L021A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM22	-	RP154L022A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM23	-	RP154L023A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM24	-	RP154L024A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM25	-	RP154L025A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM26	-	RP154L026A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM27	-	RP154L027A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM28	-	RP154L028A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM29	-	RP154L029A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM3	-	XC9260B33DER-G	DC-DC-IC	PWM step-down, 3.3V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BM30	-	RP154L030A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM31	-	RP154L031A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.85V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM32	-	RP154L032A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM33	-	RP154L033A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM34	-	RP154L034A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM35	-	RP154L035A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM36	-	RP154L036A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BM4	-	XC9260B34DER-G	DC-DC-IC	PWM step-down, 3.4V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BM5	-	XC9260B35DER-G	DC-DC-IC	PWM step-down, 3.5V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BM6	-	XC9260B36DER-G	DC-DC-IC	PWM step-down, 3.6V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BMA	-	TC1302BMAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMA	-	XC9260B3ADER-G	DC-DC-IC	PWM step-down, 3.05V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BMAA	-	TC1301BMAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMAB	-	TC1301BMABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMAC	-	TC1301BMACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMAD	-	TC1301BMADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMAE	-	TC1301BMAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMAF	-	TC1301BMAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMB	-	TC1302BMBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMB	-	XC9260B3BDER-G	DC-DC-IC	PWM step-down, 3.15V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BMBA	-	TC1301BMBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMBB	-	TC1301BMBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMBC	-	TC1301BMBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMBD	-	TC1301BMBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMBE	-	TC1301BMBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BMBF	-	TC1301BMBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMC	-	TC1302BMCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMC	-	XC9260B3CDER-G	DC-DC-IC	PWM step-down, 3.25V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BMCA	-	TC1301BMCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMCB	-	TC1301BMCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMCC	-	TC1301BMCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMCD	-	TC1301BMCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMCE	-	TC1301BMCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMCF	-	TC1301BMCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMD	-	TC1302BMDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMD	-	XC9260B3DDER-G	DC-DC-IC	PWM step-down, 3.35V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BMDA	-	TC1301BMDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMDB	-	TC1301BMDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMDC	-	TC1301BMDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMDD	-	TC1301BMDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMDE	-	TC1301BMDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMDF	-	TC1301BMDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BME	-	TC1302BMEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BME	-	XC9260B3EDER-G	DC-DC-IC	PWM step-down, 3.45V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BMEA	-	TC1301BMEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMEB	-	TC1301BMEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMEC	-	TC1301BMECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMED	-	TC1301BMEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMEE	-	TC1301BMEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMEF	-	TC1301BMEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMF	-	MIC5321-2.8/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BMF	-	TC1302BMFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMF	-	XC9260B3FDER-G	DC-DC-IC	PWM step-down, 3.55V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BMF	mb	MIC5321-2.8/1.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±2%, 150mA, +CE	MLF-6	74g2	VR31	9i	Mcr
BMFA	-	TC1301BMFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMFB	-	TC1301BMFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMFC	-	TC1301BMFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMFD	-	TC1301BMFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMFE	-	TC1301BMFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMFF	-	TC1301BMFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMG	-	MIC5321-2.8/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BMG	-	TC1302BMGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMG	mb	MIC5321-2.8/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 150mA, +CE	MLF-6	74g2	VR31	9i	Mcr
BMGA	-	TC1301BMGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMGB	-	TC1301BMGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMGC	-	TC1301BMGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMGD	-	TC1301BMGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMGE	-	TC1301BMGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMGF	-	TC1301BMGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMH	-	TC1302BMHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMHA	-	TC1301BMHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMHB	-	TC1301BMHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMHC	-	TC1301BMHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMHD	-	TC1301BMHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMHE	-	TC1301BMHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMHF	-	TC1301BMHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMI	-	TC1302BMIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMIA	-	TC1301BMIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMIB	-	TC1301BMIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMIC	-	TC1301BMICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMID	-	TC1301BMIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMIE	-	TC1301BMIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMIF	-	TC1301BMIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMJ	-	TC1302BMJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMJA	-	TC1301BMJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMJB	-	TC1301BMJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMJC	-	TC1301BMJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMJD	-	TC1301BMJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMJE	-	TC1301BMJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMJF	-	TC1301BMJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMK	-	MIC5321-2.8/2.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.6V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BMK	-	TC1302BMKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMKA	-	TC1301BMKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMKB	-	TC1301BMKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMKC	-	TC1301BMKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BMKD	-	TC1301BMKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMKE	-	TC1301BMKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMKF	-	TC1301BMKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BML	-	TC1302BMLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMLA	-	TC1301BMLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMLB	-	TC1301BMLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMLC	-	TC1301BMLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMLD	-	TC1301BMLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMLE	-	TC1301BMLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMLF	-	TC1301BMLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMM	-	MIC5321-2.8/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BMM	-	TC1302BMMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMM	mb	MIC5321-2.8/2.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 150mA, +CE	MLF-6	74g2	VR31	9i	Mcr
BMMA	-	TC1301BMMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMMB	-	TC1301BMMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMMC	-	TC1301BMMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMMD	-	TC1301BMMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMME	-	TC1301BMMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMMF	-	TC1301BMMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMN	-	TC1302BMNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMN	-	XC6119N30A7R	Vdet-IC	3.0V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BMNA	-	TC1301BMNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMNB	-	TC1301BMNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMNC	-	TC1301BMNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMND	-	TC1301BMNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMNE	-	TC1301BMNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMNF	-	TC1301BMNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMO	-	TC1302BMOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMOA	-	TC1301BMOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMOB	-	TC1301BMOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMOC	-	TC1301BMOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMOD	-	TC1301BMODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMOE	-	TC1301BMOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMOF	-	TC1301BMOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMP	-	TC1302BMPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMP	-	XC6119N31A7R	Vdet-IC	3.1V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BMPA	-	TC1301BMPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMPB	-	TC1301BMPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMPC	-	TC1301BMPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMPD	-	TC1301BMPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMPE	-	TC1301BMPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMPF	-	TC1301BMPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMQ	-	TC1302BMQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMQA	-	TC1301BMQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMQB	-	TC1301BMQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMQC	-	TC1301BMQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMQD	-	TC1301BMQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMQE	-	TC1301BMQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMQF	-	TC1301BMQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMR	-	TC1302BMRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMR	-	XC6119N32A7R	Vdet-IC	3.2V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BMRA	-	TC1301BMRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMRB	-	TC1301BMRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMRC	-	TC1301BMRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMRD	-	TC1301BMRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMRE	-	TC1301BMREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMRF	-	TC1301BMRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMS	-	TC1302BMSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMS	-	XC6119N33A7R	Vdet-IC	3.3V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BMSA	-	TC1301BMSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMSB	-	TC1301BMSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMSC	-	TC1301BMSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMSD	-	TC1301BMSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMSE	-	TC1301BMSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMSF	-	TC1301BMSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMT	-	TC1302BMTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMT	-	XC6119N34A7R	Vdet-IC	3.4V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BMTA	-	TC1301BMTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMTB	-	TC1301BMTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMTC	-	TC1301BMTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BMTD	-	TC1301BMTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMTE	-	TC1301BMTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMTF	-	TC1301BMTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMU	-	TC1302BMUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMU	-	XC6119N35A7R	Vdet-IC	3.5V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BMUA	-	TC1301BMUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMUB	-	TC1301BMUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMUC	-	TC1301BMUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMUD	-	TC1301BMUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMUE	-	TC1301BMUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMUF	-	TC1301BMUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMV	-	TC1302BMVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMV	-	XC6119N36A7R	Vdet-IC	3.6V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BMVA	-	TC1301BMVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMVB	-	TC1301BMVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMVC	-	TC1301BMVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMVD	-	TC1301BMVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMVE	-	TC1301BMVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMVF	-	TC1301BMVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMW	-	TC1302BMWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BMWA	-	TC1301BMWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMWB	-	TC1301BMWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMWC	-	TC1301BMWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMWD	-	TC1301BMWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMWE	-	TC1301BMWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMWF	-	TC1301BMWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BMX	-	XC6119N37A7R	Vdet-IC	3.7V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BMY	-	XC6119N38A7R	Vdet-IC	3.8V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BMZ	-	XC6119N39A7R	Vdet-IC	3.9V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BN	-	RP104K291C	LVR-IC	LDO, 2.9V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BN	-	XC6221B2117R	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BN	-	XC6223D30B9R-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BN	-	XC9244A2LC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.85V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BN01	-	RP154L001B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN02	-	RP154L002B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN03	-	RP154L003B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN04	-	RP154L004B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN05	-	RP154L005B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN06	-	RP154L006B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN07	-	RP154L007B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN08	-	RP154L008B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN09	-	RP154L009B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN10	-	RP154L010B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN11	-	RP154L011B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN12	-	RP154L012B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN13	-	RP154L013B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN14	-	RP154L014B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN15	-	RP154L015B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN16	-	RP154L016B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN17	-	RP154L017B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN18	-	RP154L018B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN19	-	RP154L019B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN20	-	RP154L020B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN21	-	RP154L021B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN22	-	RP154L022B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN23	-	RP154L023B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN24	-	RP154L024B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN25	-	RP154L025B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN26	-	RP154L026B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN27	-	RP154L027B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN28	-	RP154L028B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN29	-	RP154L029B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN30	-	RP154L030B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN31	-	RP154L031B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.85V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN32	-	RP154L032B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN33	-	RP154L033B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN34	-	RP154L034B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN35	-	RP154L035B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN36	-	RP154L036B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.8V±1%, 300mA, +CE	DFN1216-8	75x6	VR26	9b	Ric
BN8	-	XC9261B08CER-G	DC-DC-IC	PWM/PFM step-down, 0.8V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BN9	-	XC9261B09CER-G	DC-DC-IC	PWM/PFM step-down, 0.9V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BNA	-	TC1302BNAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNAA	-	TC1301BNAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNAB	-	TC1301BNABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNAC	-	TC1301BNACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNAD	-	TC1301BNADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNAE	-	TC1301BNAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNAF	-	TC1301BNAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNB	-	TC1302BNBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNBA	-	TC1301BNBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNBB	-	TC1301BNBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNBC	-	TC1301BNBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNBD	-	TC1301BNBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNBE	-	TC1301BNBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNBF	-	TC1301BNBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNC	-	TC1302BNCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNCA	-	TC1301BNCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNCB	-	TC1301BNCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNCC	-	TC1301BNCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNCD	-	TC1301BNCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNCE	-	TC1301BNCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNCF	-	TC1301BNCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BND	-	MIC5321-2.85/1.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.85V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BND	-	TC1302BNDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNDA	-	TC1301BNDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNDB	-	TC1301BNDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNDC	-	TC1301BNDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNDD	-	TC1301BNDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNDE	-	TC1301BNDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNDF	-	TC1301BNDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNE	-	TC1302BNEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNEA	-	TC1301BNEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNEB	-	TC1301BNEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNEC	-	TC1301BNECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNED	-	TC1301BNEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNEE	-	TC1301BNEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNEF	-	TC1301BNEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNF	-	TC1302BNFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNFA	-	TC1301BNFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNFB	-	TC1301BNFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNFC	-	TC1301BNFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNFD	-	TC1301BNFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNFE	-	TC1301BNFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNFF	-	TC1301BNFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNG	-	TC1302BNGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNGA	-	TC1301BNGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNGB	-	TC1301BNGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNGC	-	TC1301BNGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNGD	-	TC1301BNGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNGE	-	TC1301BNGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNGF	-	TC1301BNGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNH	-	TC1302BNHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNHA	-	TC1301BNHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNHB	-	TC1301BNHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNHC	-	TC1301BNHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNHD	-	TC1301BNHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNHE	-	TC1301BNHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNHF	-	TC1301BNHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNI	-	TC1302BNIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNIA	-	TC1301BNIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNIB	-	TC1301BNIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNIC	-	TC1301BNICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNID	-	TC1301BNIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNIE	-	TC1301BNIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNIF	-	TC1301BNIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNJ	-	TC1302BNJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNJA	-	TC1301BNJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNJB	-	TC1301BNJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNJC	-	TC1301BNJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNJD	-	TC1301BNJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BNJE	-	TC1301BNJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNJF	-	TC1301BNJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNK	-	MIC5321-2.85/2.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.6V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BNK	-	TC1302BNKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNKA	-	TC1301BNKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNKB	-	TC1301BNKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNKC	-	TC1301BNKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNKD	-	TC1301BNKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNKE	-	TC1301BNKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNKF	-	TC1301BNKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNL	-	TC1302BNLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNL	-	XC9261B0LCER-G	DC-DC-IC	PWM/PFM step-down, 0.85V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BNLA	-	TC1301BNLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNLB	-	TC1301BNLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNLC	-	TC1301BNLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNLD	-	TC1301BNLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNLE	-	TC1301BNLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNLF	-	TC1301BNLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNM	-	TC1302BNMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNM	-	XC9261B0MCER-G	DC-DC-IC	PWM/PFM step-down, 0.95V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BNMA	-	TC1301BNMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNMB	-	TC1301BNMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNMC	-	TC1301BNMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNMD	-	TC1301BNMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNME	-	TC1301BNMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNMF	-	TC1301BNMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNN	-	MIC5321-2.85/2.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.85V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BNN	-	TC1302BNNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNN	-	XC6119N40A7R	Vdet-IC	4.0V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BNNA	-	TC1301BNNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNNB	-	TC1301BNNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNNC	-	TC1301BNNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNND	-	TC1301BNNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNNE	-	TC1301BNNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNNF	-	TC1301BNNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNO	-	TC1302BNOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNOA	-	TC1301BNOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNOB	-	TC1301BNOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNOC	-	TC1301BNOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNOD	-	TC1301BNODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNOE	-	TC1301BNOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNOF	-	TC1301BNOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNP	-	TC1302BNPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNP	-	XC6119N41A7R	Vdet-IC	4.1V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BNPA	-	TC1301BNPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNPB	-	TC1301BNPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNPC	-	TC1301BNPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNPD	-	TC1301BNPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNPE	-	TC1301BNPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNPF	-	TC1301BNPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNQ	-	TC1302BNQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNQA	-	TC1301BNQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNQB	-	TC1301BNQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNQC	-	TC1301BNQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNQD	-	TC1301BNQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNQE	-	TC1301BNQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNQF	-	TC1301BNQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNR	-	TC1302BNRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNR	-	XC6119N42A7R	Vdet-IC	4.2V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BNRA	-	TC1301BNRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNRB	-	TC1301BNRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNRC	-	TC1301BNRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNRD	-	TC1301BNRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNRE	-	TC1301BNREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNRF	-	TC1301BNRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNS	-	TC1302BNSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNS	-	XC6119N43A7R	Vdet-IC	4.3V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BNSA	-	TC1301BNSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNSB	-	TC1301BNSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNSC	-	TC1301BNSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BNSD	-	TC1301BNSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNSE	-	TC1301BNSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNSF	-	TC1301BNSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNT	-	TC1302BNTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNT	-	XC6119N44A7R	Vdet-IC	4.4V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BNTA	-	TC1301BNTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNTB	-	TC1301BNTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNTC	-	TC1301BNTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNTD	-	TC1301BNTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNTE	-	TC1301BNTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNTF	-	TC1301BNTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNU	-	TC1302BNUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNU	-	XC6119N45A7R	Vdet-IC	4.5V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BNUA	-	TC1301BNUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNUB	-	TC1301BNUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNUC	-	TC1301BNUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNUD	-	TC1301BNUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNUE	-	TC1301BNUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNUF	-	TC1301BNUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNV	-	TC1302BNVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNV	-	XC6119N46A7R	Vdet-IC	4.6V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BNVA	-	TC1301BNVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNVB	-	TC1301BNVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNVC	-	TC1301BNVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNVD	-	TC1301BNVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNVE	-	TC1301BNVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNVF	-	TC1301BNVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNW	-	TC1302BNWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BNWA	-	TC1301BNWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNWB	-	TC1301BNWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNWC	-	TC1301BNWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNWD	-	TC1301BNWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNWE	-	TC1301BNWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNWF	-	TC1301BNWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.0V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BNX	-	XC6119N47A7R	Vdet-IC	4.7V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BNY	-	XC6119N48A7R	Vdet-IC	4.8V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BNZ	-	XC6119N49A7R	Vdet-IC	4.9V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BOA	-	TC1302BOAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOAA	-	TC1301BOAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOAB	-	TC1301BOABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOAC	-	TC1301BOACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOAD	-	TC1301BOADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOAE	-	TC1301BOAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOAF	-	TC1301BOAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOB	-	TC1302BOBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOBA	-	TC1301BOBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOBB	-	TC1301BOBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOBC	-	TC1301BOBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOBD	-	TC1301BOBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOBE	-	TC1301BOBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOBF	-	TC1301BOBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOC	-	TC1302BOCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOCA	-	TC1301BOCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOCB	-	TC1301BOCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOCC	-	TC1301BOCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOCD	-	TC1301BOCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOCE	-	TC1301BOCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOCF	-	TC1301BOCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOD	-	TC1302BODVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BODA	-	TC1301BODAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BODB	-	TC1301BODBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BODC	-	TC1301BODCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BODD	-	TC1301BODDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BODE	-	TC1301BODEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BODF	-	TC1301BODFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOE	-	TC1302BOEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOEA	-	TC1301BOEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOEB	-	TC1301BOEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOEC	-	TC1301BOECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOED	-	TC1301BOEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BOEE	-	TC1301BOEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOEF	-	TC1301BOEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOF	-	MIC5321-2.9/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/1.5V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BOF	-	TC1302BOFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOFA	-	TC1301BOFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOFB	-	TC1301BOFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOFC	-	TC1301BOFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOFD	-	TC1301BOFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOFE	-	TC1301BOFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOFF	-	TC1301BOFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOG	-	MIC5321-2.9/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/1.8V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BOG	-	TC1302BOGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOGA	-	TC1301BOGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOGB	-	TC1301BOGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOGC	-	TC1301BOGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOGD	-	TC1301BOGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOGE	-	TC1301BOGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOGF	-	TC1301BOGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOH	-	TC1302BOHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOHA	-	TC1301BOHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOHB	-	TC1301BOHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOHC	-	TC1301BOHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOHD	-	TC1301BOHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOHE	-	TC1301BOHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOHF	-	TC1301BOHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOI	-	TC1302BOIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOIA	-	TC1301BOIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOIB	-	TC1301BOIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOIC	-	TC1301BOICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOID	-	TC1301BOIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOIE	-	TC1301BOIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOIF	-	TC1301BOIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOJ	-	TC1302BOJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOJA	-	TC1301BOJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOJB	-	TC1301BOJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOJC	-	TC1301BOJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOJD	-	TC1301BOJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOJE	-	TC1301BOJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOJF	-	TC1301BOJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOK	-	TC1302BOKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOKA	-	TC1301BOKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOKB	-	TC1301BOKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOKC	-	TC1301BOKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOKD	-	TC1301BOKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOKE	-	TC1301BOKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOKF	-	TC1301BOKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOL	-	TC1302BOLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOLA	-	TC1301BOLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOLB	-	TC1301BOLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOLC	-	TC1301BOLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOLD	-	TC1301BOLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOLE	-	TC1301BOLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOLF	-	TC1301BOLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOM	-	TC1302BOMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOMA	-	TC1301BOMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOMB	-	TC1301BOMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOMC	-	TC1301BOMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOMD	-	TC1301BOMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOME	-	TC1301BOMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOMF	-	TC1301BOMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BON	-	TC1302BONVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BONA	-	TC1301BONAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BONB	-	TC1301BONBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BONC	-	TC1301BONCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOND	-	TC1301BONDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BONE	-	TC1301BONEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BONF	-	TC1301BONFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOO	-	MIC5321-2.9/2.9YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/2.9V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BOO	-	TC1302BOOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOOA	-	TC1301BOOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BOOB	-	TC1301BOOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOOC	-	TC1301BOOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOOD	-	TC1301BOODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOOE	-	TC1301BOOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOOF	-	TC1301BOOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOP	-	TC1302BOPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOPA	-	TC1301BOPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOPB	-	TC1301BOPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOPC	-	TC1301BOPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOPD	-	TC1301BOPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOPE	-	TC1301BOPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOPF	-	TC1301BOPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOQ	-	TC1302BOQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOQA	-	TC1301BOQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOQB	-	TC1301BOQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOQC	-	TC1301BOQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOQD	-	TC1301BOQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOQE	-	TC1301BOQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOQF	-	TC1301BOQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOR	-	TC1302BORVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BORA	-	TC1301BORAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BORB	-	TC1301BORBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BORC	-	TC1301BORCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BORD	-	TC1301BORDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BORE	-	TC1301BOREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BORF	-	TC1301BORFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOS	-	TC1302BOSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOSA	-	TC1301BOSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOSB	-	TC1301BOSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOSC	-	TC1301BOSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOSD	-	TC1301BOSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOSE	-	TC1301BOSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOSF	-	TC1301BOSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOT	-	TC1302BOTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOTA	-	TC1301BOTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOTB	-	TC1301BOTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOTC	-	TC1301BOTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOTD	-	TC1301BOTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOTE	-	TC1301BOTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOTF	-	TC1301BOTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOU	-	TC1302BOUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOUA	-	TC1301BOUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOUB	-	TC1301BOUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOUC	-	TC1301BOUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOUD	-	TC1301BOUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOUE	-	TC1301BOUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOUF	-	TC1301BOUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOV	-	TC1302BOVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOVA	-	TC1301BOVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOVB	-	TC1301BOVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOVC	-	TC1301BOVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOVD	-	TC1301BOVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOVE	-	TC1301BOVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOVF	-	TC1301BOVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOW	-	TC1302BOWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BOWA	-	TC1301BOWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOWB	-	TC1301BOWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOWC	-	TC1301BOWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOWD	-	TC1301BOWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOWE	-	TC1301BOWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BOWF	-	TC1301BOWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.9V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BP	-	LD6805K/13P	LVR-IC	LDO, 1.3V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
BP	-	RP104K301C	LVR-IC	LDO, 3.0V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BP	-	SiP21106DVP-25-E3	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	TSC75-6L	91ub	VR7	9m	Vs
BP	-	XC6221B2217R	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BP	-	XC6223D31B9R-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BP	-	XC9244A2MC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.95V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BP0	-	XC9261B10CER-G	DC-DC-IC	PWM/PFM step-down, 1.0V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BP01	-	RP500L111A	DC-DC-IC	PWM/VFM st-dwn, 1.1V±24mV, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP02	-	RP500L121A	DC-DC-IC	PWM/VFM st-dwn, 1.2V±24mV, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BP03	-	RP500L121A5	DC-DC-IC	PWM/VFM st-dwn, 1.25V±24mV, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP04	-	RP500L131A	DC-DC-IC	PWM/VFM st-dwn, 1.3V±24mV, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP05	-	RP500L141A	DC-DC-IC	PWM/VFM st-dwn, 1.4V±24mV, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP06	-	RP500L151A	DC-DC-IC	PWM/VFM st-dwn, 1.5V±24mV, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP07	-	RP500L161A	DC-DC-IC	PWM/VFM st-dwn, 1.6V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP08	-	RP500L171A	DC-DC-IC	PWM/VFM st-dwn, 1.7V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP09	-	RP500L181A	DC-DC-IC	PWM/VFM st-dwn, 1.8V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP1	-	XC9261B11CER-G	DC-DC-IC	PWM/PFM step-down, 1.1V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BP10	-	RP500L191A	DC-DC-IC	PWM/VFM st-dwn, 1.9V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP11	-	RP500L201A	DC-DC-IC	PWM/VFM st-dwn, 2.0V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP12	-	RP500L211A	DC-DC-IC	PWM/VFM st-dwn, 2.1V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP13	-	RP500L221A	DC-DC-IC	PWM/VFM st-dwn, 2.2V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP14	-	RP500L231A	DC-DC-IC	PWM/VFM st-dwn, 2.3V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP15	-	RP500L241A	DC-DC-IC	PWM/VFM st-dwn, 2.4V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP16	-	RP500L251A	DC-DC-IC	PWM/VFM st-dwn, 2.5V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP17	-	RP500L261A	DC-DC-IC	PWM/VFM st-dwn, 2.6V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP18	-	RP500L271A	DC-DC-IC	PWM/VFM st-dwn, 2.7V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP19	-	RP500L281A	DC-DC-IC	PWM/VFM st-dwn, 2.8V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP2	-	XC9261B12CER-G	DC-DC-IC	PWM/PFM step-down, 1.2V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BP20	-	RP500L291A	DC-DC-IC	PWM/VFM st-dwn, 2.9V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP21	-	RP500L301A	DC-DC-IC	PWM/VFM st-dwn, 3.0V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP22	-	RP500L311A	DC-DC-IC	PWM/VFM st-dwn, 3.1V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP23	-	RP500L321A	DC-DC-IC	PWM/VFM st-dwn, 3.2V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP24	-	RP500L331A	DC-DC-IC	PWM/VFM st-dwn, 3.3V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP25	-	RP500L112A	DC-DC-IC	PWM step-down, 1.1V±24mV, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP26	-	RP500L122A	DC-DC-IC	PWM step-down, 1.2V±24mV, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP27	-	RP500L122A5	DC-DC-IC	PWM step-down, 1.25V±24mV, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP28	-	RP500L132A	DC-DC-IC	PWM step-down, 1.3V±24mV, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP29	-	RP500L142A	DC-DC-IC	PWM step-down, 1.4V±24mV, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP3	-	XC9261B13CER-G	DC-DC-IC	PWM/PFM step-down, 1.3V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BP30	-	RP500L152A	DC-DC-IC	PWM step-down, 1.5V±24mV, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP31	-	RP500L162A	DC-DC-IC	PWM step-down, 1.6V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP32	-	RP500L172A	DC-DC-IC	PWM step-down, 1.7V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP33	-	RP500L182A	DC-DC-IC	PWM step-down, 1.8V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP34	-	RP500L192A	DC-DC-IC	PWM step-down, 1.9V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP35	-	RP500L202A	DC-DC-IC	PWM step-down, 2.0V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP36	-	RP500L212A	DC-DC-IC	PWM step-down, 2.1V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP37	-	RP500L222A	DC-DC-IC	PWM step-down, 2.2V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP38	-	RP500L232A	DC-DC-IC	PWM step-down, 2.3V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP39	-	RP500L242A	DC-DC-IC	PWM step-down, 2.4V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP4	-	XC9261B14CER-G	DC-DC-IC	PWM/PFM step-down, 1.4V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BP40	-	RP500L252A	DC-DC-IC	PWM step-down, 2.5V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP41	-	RP500L262A	DC-DC-IC	PWM step-down, 2.6V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP42	-	RP500L272A	DC-DC-IC	PWM step-down, 2.7V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP43	-	RP500L282A	DC-DC-IC	PWM step-down, 2.8V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP44	-	RP500L292A	DC-DC-IC	PWM step-down, 2.9V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP45	-	RP500L302A	DC-DC-IC	PWM step-down, 3.0V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP46	-	RP500L312A	DC-DC-IC	PWM step-down, 3.1V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP47	-	RP500L322A	DC-DC-IC	PWM step-down, 3.2V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP48	-	RP500L332A	DC-DC-IC	PWM step-down, 3.3V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BP49	-	RP500L113A	DC-DC-IC	PWM/VFM st-dwn, 1.1V±24mV, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP5	-	XC9261B15CER-G	DC-DC-IC	PWM/PFM step-down, 1.5V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BP50	-	RP500L123A	DC-DC-IC	PWM/VFM st-dwn, 1.2V±24mV, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP51	-	RP500L123A5	DC-DC-IC	PWM/VFM st-dwn, 1.25V±24mV, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP52	-	RP500L133A	DC-DC-IC	PWM/VFM st-dwn, 1.3V±24mV, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP53	-	RP500L143A	DC-DC-IC	PWM/VFM st-dwn, 1.4V±24mV, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP54	-	RP500L153A	DC-DC-IC	PWM/VFM st-dwn, 1.5V±24mV, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP55	-	RP500L163A	DC-DC-IC	PWM/VFM st-dwn, 1.6V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP56	-	RP500L173A	DC-DC-IC	PWM/VFM st-dwn, 1.7V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP57	-	RP500L183A	DC-DC-IC	PWM/VFM st-dwn, 1.8V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP58	-	RP500L193A	DC-DC-IC	PWM/VFM st-dwn, 1.9V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP59	-	RP500L203A	DC-DC-IC	PWM/VFM st-dwn, 2.0V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP6	-	XC9261B16CER-G	DC-DC-IC	PWM/PFM step-down, 1.6V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BP60	-	RP500L213A	DC-DC-IC	PWM/VFM st-dwn, 2.1V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP61	-	RP500L223A	DC-DC-IC	PWM/VFM st-dwn, 2.2V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP62	-	RP500L233A	DC-DC-IC	PWM/VFM st-dwn, 2.3V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP63	-	RP500L243A	DC-DC-IC	PWM/VFM st-dwn, 2.4V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP64	-	RP500L253A	DC-DC-IC	PWM/VFM st-dwn, 2.5V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP65	-	RP500L263A	DC-DC-IC	PWM/VFM st-dwn, 2.6V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP66	-	RP500L273A	DC-DC-IC	PWM/VFM st-dwn, 2.7V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BP67	-	RP500L283A	DC-DC-IC	PWM/VFM st-dwn, 2.8V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP68	-	RP500L293A	DC-DC-IC	PWM/VFM st-dwn, 2.9V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP69	-	RP500L303A	DC-DC-IC	PWM/VFM st-dwn, 3.0V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP7	-	XC9261B17CER-G	DC-DC-IC	PWM/PFM step-down, 1.7V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BP70	-	RP500L313A	DC-DC-IC	PWM/VFM st-dwn, 3.1V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP71	-	RP500L323A	DC-DC-IC	PWM/VFM st-dwn, 3.2V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP72	-	RP500L333A	DC-DC-IC	PWM/VFM st-dwn, 3.3V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP73	-	RP500L114A	DC-DC-IC	PWM step-down, 1.1V±24mV, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP74	-	RP500L124A	DC-DC-IC	PWM step-down, 1.2V±24mV, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP75	-	RP500L124A5	DC-DC-IC	PWM step-down, 1.25V±24mV, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP76	-	RP500L134A	DC-DC-IC	PWM step-down, 1.4V±24mV, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP77	-	RP500L144A	DC-DC-IC	PWM step-down, 1.4V±24mV, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP78	-	RP500L154A	DC-DC-IC	PWM step-down, 1.5V±24mV, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP79	-	RP500L164A	DC-DC-IC	PWM step-down, 1.6V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP8	-	XC9261B18CER-G	DC-DC-IC	PWM/PFM step-down, 1.8V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BP80	-	RP500L174A	DC-DC-IC	PWM step-down, 1.7V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP81	-	RP500L184A	DC-DC-IC	PWM step-down, 1.8V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP82	-	RP500L194A	DC-DC-IC	PWM step-down, 1.9V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP83	-	RP500L204A	DC-DC-IC	PWM step-down, 2.0V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP84	-	RP500L214A	DC-DC-IC	PWM step-down, 2.1V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP85	-	RP500L224A	DC-DC-IC	PWM step-down, 2.2V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP86	-	RP500L234A	DC-DC-IC	PWM step-down, 2.3V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP87	-	RP500L244A	DC-DC-IC	PWM step-down, 2.4V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP88	-	RP500L254A	DC-DC-IC	PWM step-down, 2.5V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP89	-	RP500L264A	DC-DC-IC	PWM step-down, 2.6V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP9	-	XC9261B19CER-G	DC-DC-IC	PWM/PFM step-down, 1.9V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BP90	-	RP500L274A	DC-DC-IC	PWM step-down, 2.7V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP91	-	RP500L284A	DC-DC-IC	PWM step-down, 2.8V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP92	-	RP500L294A	DC-DC-IC	PWM step-down, 2.9V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP93	-	RP500L304A	DC-DC-IC	PWM step-down, 3.0V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP94	-	RP500L314A	DC-DC-IC	PWM step-down, 3.1V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP95	-	RP500L324A	DC-DC-IC	PWM step-down, 3.2V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BP96	-	RP500L334A	DC-DC-IC	PWM step-down, 3.3V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BPA	-	TC1302BPAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPA	-	XC9261B1ACER-G	DC-DC-IC	PWM/PFM step-down, 1.05V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BPAA	-	TC1301BPAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPAB	-	TC1301BPABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPAC	-	TC1301BPACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPAD	-	TC1301BPADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPAE	-	TC1301BPAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPAF	-	TC1301BPAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPB	-	TC1302BPBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPB	-	TPA4411MRTJ	Lin-IC	AF PA, 1.8..4.5V, 2x80mW(4V/16Ω), shutdown	QFN-20	38	-	9a	Ti
BPB	-	XC9261B1BCER-G	DC-DC-IC	PWM/PFM step-down, 1.15V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BPBA	-	TC1301BPBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPBB	-	TC1301BPBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPBC	-	TC1301BPBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPBD	-	TC1301BPBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPBE	-	TC1301BPBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPBF	-	TC1301BPBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPC	-	TC1302BPCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPC	-	XC9261B1CCER-G	DC-DC-IC	PWM/PFM step-down, 1.25V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BPCA	-	TC1301BPCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPCB	-	TC1301BPCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPCC	-	TC1301BPCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPCD	-	TC1301BPCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPCE	-	TC1301BPCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPCF	-	TC1301BPCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPD	-	TC1302BPDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPD	-	XC9261B1DCER-G	DC-DC-IC	PWM/PFM step-down, 1.35VV±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BPDA	-	TC1301BPDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPDB	-	TC1301BPDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPDC	-	TC1301BPDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPDD	-	TC1301BPDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPDE	-	TC1301BPDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPDF	-	TC1301BPDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPE	-	TC1302BPEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPE	-	XC9261B1ECER-G	DC-DC-IC	PWM/PFM step-down, 1.45V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BPEA	-	TC1301BPEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPEB	-	TC1301BPEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BPEC	-	TC1301BPECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPED	-	TC1301BPEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPEE	-	TC1301BPEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPEF	-	TC1301BPEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPF	-	TC1302BPFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPF	-	XC9261B1FCER-G	DC-DC-IC	PWM/PFM step-down, 1.55V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BPFA	-	TC1301BPFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPFB	-	TC1301BPFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPFC	-	TC1301BPFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPFD	-	TC1301BPFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPFE	-	TC1301BPFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPFF	-	TC1301BPFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPG	-	MIC5321-3.0/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.8V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BPG	-	TC1302BPGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPGA	-	TC1301BPGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPGB	-	TC1301BPGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPGC	-	TC1301BPGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPGD	-	TC1301BPGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPGE	-	TC1301BPGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPGF	-	TC1301BPGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPH	-	TC1302BPHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPH	-	XC9261B1HCER-G	DC-DC-IC	PWM/PFM step-down, 1.65V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BPHA	-	TC1301BPHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPHB	-	TC1301BPHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPHC	-	TC1301BPHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPHD	-	TC1301BPHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPHE	-	TC1301BPHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPHF	-	TC1301BPHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPI	-	TC1302BPIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPIA	-	TC1301BPIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPIB	-	TC1301BPIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPIC	-	TC1301BPICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPID	-	TC1301BPIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPIE	-	TC1301BPIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPIF	-	TC1301BPIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPJ	-	MIC5321-3.0/2.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.5V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BPJ	-	TC1302BPJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPJA	-	TC1301BPJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPJB	-	TC1301BPJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPJC	-	TC1301BPJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPJD	-	TC1301BPJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPJE	-	TC1301BPJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPJF	-	TC1301BPJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPK	-	MIC5321-3.0/2.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.6V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BPK	-	TC1302BPKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPK	-	XC9261B1KCER-G	DC-DC-IC	PWM/PFM step-down, 1.75V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BPKA	-	TC1301BPKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPKB	-	TC1301BPKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPKC	-	TC1301BPKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPKD	-	TC1301BPKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPKE	-	TC1301BPKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPKF	-	TC1301BPKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPL	-	TC1302BPLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPL	-	XC9261B1LCER-G	DC-DC-IC	PWM/PFM step-down, 1.85V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BPLA	-	TC1301BPLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPLB	-	TC1301BPLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPLC	-	TC1301BPLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPLD	-	TC1301BPLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPLE	-	TC1301BPLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPLF	-	TC1301BPLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPM	-	MIC5321-3.0/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.8V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BPM	-	TC1302BPMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPM	-	XC9261B1MCER-G	DC-DC-IC	PWM/PFM step-down, 1.95V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BPMA	-	TC1301BPMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPMB	-	TC1301BPMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPMC	-	TC1301BPMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPMD	-	TC1301BPMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPME	-	TC1301BPMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPMF	-	TC1301BPMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPN	-	MIC5321-3.0/2.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.85V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BPN	-	TC1302BPNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPN	-	XC6119N50A7R	Vdet-IC	5.0V±2%, -Reset ODO	USPN-4	58rj	VD1	9h	Tor
BPNA	-	TC1301BPNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPNB	-	TC1301BPNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPNC	-	TC1301BPNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPND	-	TC1301BPNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPNE	-	TC1301BPNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPNF	-	TC1301BPNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPO	-	TC1302BPOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPOA	-	TC1301BPOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPOB	-	TC1301BPOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPOC	-	TC1301BPOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPOD	-	TC1301BPODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPOE	-	TC1301BPOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPOF	-	TC1301BPOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPP	-	MIC5321-3.0/3.0YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BPP	-	TC1302BPPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPP	mb	MIC5321-3.0/3.0YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 150mA, +CE	MLF-6	74g2	VR31	9i	Mcr
BPPA	-	TC1301BPPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPPB	-	TC1301BPPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPPC	-	TC1301BPPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPPD	-	TC1301BPPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPPE	-	TC1301BPPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPPF	-	TC1301BPPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPQ	-	TC1302BPQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPQA	-	TC1301BPQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPQB	-	TC1301BPQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPQC	-	TC1301BPQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPQD	-	TC1301BPQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPQE	-	TC1301BPQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPQF	-	TC1301BPQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPR	-	TC1302BPRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPRA	-	TC1301BPRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPRB	-	TC1301BPRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPRC	-	TC1301BPRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPRD	-	TC1301BPRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPRE	-	TC1301BPREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPRF	-	TC1301BPRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPS	-	TC1302BPSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPSA	-	TC1301BPSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPSB	-	TC1301BPSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPSC	-	TC1301BPSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPSD	-	TC1301BPSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPSE	-	TC1301BPSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPSF	-	TC1301BPSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPT	-	TC1302BPTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPTA	-	TC1301BPTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPTB	-	TC1301BPTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPTC	-	TC1301BPTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPTD	-	TC1301BPTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPTE	-	TC1301BPTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPTF	-	TC1301BPTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPU	-	TC1302BPUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPUA	-	TC1301BPUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPUB	-	TC1301BPUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPUC	-	TC1301BPUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPUD	-	TC1301BPUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPUE	-	TC1301BPUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPUF	-	TC1301BPUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPV	-	TC1302BPVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPVA	-	TC1301BPVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPVB	-	TC1301BPVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPVC	-	TC1301BPVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPVD	-	TC1301BPVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPVE	-	TC1301BPVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPVF	-	TC1301BPVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPW	-	TC1302BPWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BPWA	-	TC1301BPWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPWB	-	TC1301BPWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPWC	-	TC1301BPWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BPWD	-	TC1301BPWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPWE	-	TC1301BPWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPWF	-	TC1301BPWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.8V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BPX	-	TPA2032D1YZF	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.75W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Ti
BPY	-	TPA2033D1YZF	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.75W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Ti
BPZ	-	TPA2034D1YZF	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.75W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Ti
BQ	-	RP104K321C	LVR-IC	LDO, 3.2V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BQ00	-	R1154L100B	LVR-IC	LDO, 10V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ01	-	R1154L001C	LVR-IC	LDO, Adjustable, 150mA, +CE	DFN1616-6	32xra	VR16	9ba	Ric
BQ01	-	R1154L101B	LVR-IC	LDO, 10.1V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ02	-	R1154L102B	LVR-IC	LDO, 10.2V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ03	-	R1154L103B	LVR-IC	LDO, 10.3V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ04	-	R1154L104B	LVR-IC	LDO, 10.4V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ05	-	R1154L105B	LVR-IC	LDO, 10.5V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ06	-	R1154L106B	LVR-IC	LDO, 10.6V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ07	-	R1154L107B	LVR-IC	LDO, 10.7V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ08	-	R1154L108B	LVR-IC	LDO, 10.8V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ09	-	R1154L109B	LVR-IC	LDO, 10.9V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ10	-	R1154L110B	LVR-IC	LDO, 11V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ11	-	R1154L111B	LVR-IC	LDO, 11.1V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ12	-	R1154L112B	LVR-IC	LDO, 11.2V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ13	-	R1154L113B	LVR-IC	LDO, 11.3V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ14	-	R1154L114B	LVR-IC	LDO, 11.4V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ15	-	R1154L115B	LVR-IC	LDO, 11.5V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ16	-	R1154L116B	LVR-IC	LDO, 11.6V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ17	-	R1154L117B	LVR-IC	LDO, 11.7V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ18	-	R1154L118B	LVR-IC	LDO, 11.8V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ19	-	R1154L119B	LVR-IC	LDO, 11.9V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ20	-	R1154L120B	LVR-IC	LDO, 12V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ25	-	R1154L025B	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ26	-	R1154L026B	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ27	-	R1154L027B	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ28	-	R1154L028B	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ29	-	R1154L029B	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ30	-	R1154L030B	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ31	-	R1154L031B	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ32	-	R1154L032B	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ33	-	R1154L033B	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ34	-	R1154L034B	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ35	-	R1154L035B	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ36	-	R1154L036B	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ37	-	R1154L037B	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ38	-	R1154L038B	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ39	-	R1154L039B	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ40	-	R1154L040B	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ41	-	R1154L041B	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ42	-	R1154L042B	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ43	-	R1154L043B	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ44	-	R1154L044B	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ45	-	R1154L045B	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ46	-	R1154L046B	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ47	-	R1154L047B	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ48	-	R1154L048B	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ49	-	R1154L049B	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ50	-	R1154L050B	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ51	-	R1154L051B	LVR-IC	LDO, 5.1V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ52	-	R1154L052B	LVR-IC	LDO, 5.2V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ53	-	R1154L053B	LVR-IC	LDO, 5.3V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ54	-	R1154L054B	LVR-IC	LDO, 5.4V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ55	-	R1154L055B	LVR-IC	LDO, 5.5V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ56	-	R1154L056B	LVR-IC	LDO, 5.6V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ57	-	R1154L057B	LVR-IC	LDO, 5.7V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ58	-	R1154L058B	LVR-IC	LDO, 5.8V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ59	-	R1154L059B	LVR-IC	LDO, 5.9V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ60	-	R1154L060B	LVR-IC	LDO, 6.0V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ61	-	R1154L061B	LVR-IC	LDO, 6.1V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ62	-	R1154L062B	LVR-IC	LDO, 6.2V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ63	-	R1154L063B	LVR-IC	LDO, 6.3V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ64	-	R1154L064B	LVR-IC	LDO, 6.4V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ65	-	R1154L065B	LVR-IC	LDO, 6.5V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BQ66	-	R1154L066B	LVR-IC	LDO, 6.6V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ67	-	R1154L067B	LVR-IC	LDO, 6.7V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ68	-	R1154L068B	LVR-IC	LDO, 6.8V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ69	-	R1154L069B	LVR-IC	LDO, 6.9V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ70	-	R1154L070B	LVR-IC	LDO, 7V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ71	-	R1154L071B	LVR-IC	LDO, 7.1V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ72	-	R1154L072B	LVR-IC	LDO, 7.2V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ73	-	R1154L073B	LVR-IC	LDO, 7.3V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ74	-	R1154L074B	LVR-IC	LDO, 7.4V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ75	-	R1154L075B	LVR-IC	LDO, 7.5V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ76	-	R1154L076B	LVR-IC	LDO, 7.6V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ77	-	R1154L077B	LVR-IC	LDO, 7.7V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ78	-	R1154L078B	LVR-IC	LDO, 7.8V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ79	-	R1154L079B	LVR-IC	LDO, 7.9V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ80	-	R1154L080B	LVR-IC	LDO, 8V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ81	-	R1154L081B	LVR-IC	LDO, 8.1V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ82	-	R1154L082B	LVR-IC	LDO, 8.2V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ83	-	R1154L083B	LVR-IC	LDO, 8.3V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ84	-	R1154L084B	LVR-IC	LDO, 8.4V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ85	-	R1154L085B	LVR-IC	LDO, 8.5V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ86	-	R1154L086B	LVR-IC	LDO, 8.6V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ87	-	R1154L087B	LVR-IC	LDO, 8.7V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ88	-	R1154L088B	LVR-IC	LDO, 8.8V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ89	-	R1154L089B	LVR-IC	LDO, 8.9V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ90	-	R1154L090B	LVR-IC	LDO, 9V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ91	-	R1154L091B	LVR-IC	LDO, 9.1V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ92	-	R1154L092B	LVR-IC	LDO, 9.2V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ93	-	R1154L093B	LVR-IC	LDO, 9.3V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ94	-	R1154L094B	LVR-IC	LDO, 9.4V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ95	-	R1154L095B	LVR-IC	LDO, 9.5V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ96	-	R1154L096B	LVR-IC	LDO, 9.6V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ97	-	R1154L097B	LVR-IC	LDO, 9.7V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ98	-	R1154L098B	LVR-IC	LDO, 9.8V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQ99	-	R1154L099B	LVR-IC	LDO, 9.9V±2%, 150mA, +CE	DFN1616-6	32vrq	VR4	9ba	Ric
BQA	-	TC1302BQAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQAA	-	TC1301BQAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQAB	-	TC1301BQABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQAC	-	TC1301BQACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQAD	-	TC1301BQADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQAE	-	TC1301BQAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQAF	-	TC1301BQAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQB	-	TC1302BQBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQBA	-	TC1301BQBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQBB	-	TC1301BQBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQBC	-	TC1301BQBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQBD	-	TC1301BQBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQBE	-	TC1301BQBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQBF	-	TC1301BQBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQC	-	TC1302BQCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQCA	-	TC1301BQCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQCB	-	TC1301BQCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQCC	-	TC1301BQCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQCD	-	TC1301BQCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQCE	-	TC1301BQCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQCF	-	TC1301BQCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQD	-	TC1302BQDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQDA	-	TC1301BQDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQDB	-	TC1301BQDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQDC	-	TC1301BQDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQDD	-	TC1301BQDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQDE	-	TC1301BQDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQDF	-	TC1301BQDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQE	-	TC1302BQEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQEA	-	TC1301BQEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQEB	-	TC1301BQEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQEC	-	TC1301BQECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQED	-	TC1301BQEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQEE	-	TC1301BQEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQEF	-	TC1301BQEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQF	-	TC1302BQFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BQFA	-	TC1301BQFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQFB	-	TC1301BQFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQFC	-	TC1301BQFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQFD	-	TC1301BQFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQFE	-	TC1301BQFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQFF	-	TC1301BQFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQG	-	TC1302BQGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQGA	-	TC1301BQGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQGB	-	TC1301BQGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQGC	-	TC1301BQGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQGD	-	TC1301BQGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQGE	-	TC1301BQGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQGF	-	TC1301BQGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQH	-	TC1302BQHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQHA	-	TC1301BQHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQHB	-	TC1301BQHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQHC	-	TC1301BQHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQHD	-	TC1301BQHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQHE	-	TC1301BQHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQHF	-	TC1301BQHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQI	-	TC1302BQIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQIA	-	TC1301BQIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQIB	-	TC1301BQIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQIC	-	TC1301BQICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQID	-	TC1301BQIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQIE	-	TC1301BQIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQIF	-	TC1301BQIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQJ	-	TC1302BQJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQJA	-	TC1301BQJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQJB	-	TC1301BQJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQJC	-	TC1301BQJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQJD	-	TC1301BQJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQJE	-	TC1301BQJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQJF	-	TC1301BQJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQK	-	TC1302BQKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQKA	-	TC1301BQKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQKB	-	TC1301BQKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQKC	-	TC1301BQKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQKD	-	TC1301BQKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQKE	-	TC1301BQKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQKF	-	TC1301BQKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQL	-	TC1302BQLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQLA	-	TC1301BQLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQLB	-	TC1301BQLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQLC	-	TC1301BQLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQLD	-	TC1301BQLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQLE	-	TC1301BQLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQLF	-	TC1301BQLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQM	-	TC1302BQMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQMA	-	TC1301BQMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQMB	-	TC1301BQMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQMC	-	TC1301BQMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQMD	-	TC1301BQMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQME	-	TC1301BQMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQMF	-	TC1301BQMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQN	-	TC1302BQNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQNA	-	TC1301BQNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQNB	-	TC1301BQNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQNC	-	TC1301BQNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQND	-	TC1301BQNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQNE	-	TC1301BQNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQNF	-	TC1301BQNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQO	-	TC1302BQOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQOA	-	TC1301BQOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQOB	-	TC1301BQOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQOC	-	TC1301BQOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQOD	-	TC1301BQODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQOE	-	TC1301BQOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQOF	-	TC1301BQOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQP	-	TC1302BQPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BQPA	-	TC1301BQPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQPB	-	TC1301BQPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQPC	-	TC1301BQPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQPD	-	TC1301BQPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQPE	-	TC1301BQPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQPF	-	TC1301BQPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQQ	-	TC1302BQQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQQA	-	TC1301BQQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQQB	-	TC1301BQQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQQC	-	TC1301BQQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQQD	-	TC1301BQQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQQE	-	TC1301BQQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQQF	-	TC1301BQQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQR	-	TC1302BQRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQRA	-	TC1301BQRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQRB	-	TC1301BQRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQRC	-	TC1301BQRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQRD	-	TC1301BQRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQRE	-	TC1301BQREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQRF	-	TC1301BQRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQS	-	TC1302BQSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQSA	-	TC1301BQSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQSB	-	TC1301BQSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQSC	-	TC1301BQSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQSD	-	TC1301BQSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQSE	-	TC1301BQSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQSF	-	TC1301BQSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQT	-	TC1302BQTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQTA	-	TC1301BQTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQTB	-	TC1301BQTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQTC	-	TC1301BQTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQTD	-	TC1301BQTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQTE	-	TC1301BQTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQTF	-	TC1301BQTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQU	-	TC1302BQUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQUA	-	TC1301BQUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQUB	-	TC1301BQUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQUC	-	TC1301BQUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQUD	-	TC1301BQUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQUE	-	TC1301BQUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQUF	-	TC1301BQUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQV	-	TC1302BQVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQVA	-	TC1301BQVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQVB	-	TC1301BQVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQVC	-	TC1301BQVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQVD	-	TC1301BQVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQVE	-	TC1301BQVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQVF	-	TC1301BQVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQW	-	TC1302BQWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BQWA	-	TC1301BQWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQWB	-	TC1301BQWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQWC	-	TC1301BQWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQWD	-	TC1301BQWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQWE	-	TC1301BQWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BQWF	-	TC1301BQWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.7V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BR	-	RP104K331C	LVR-IC	LDO, 3.3V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BR	-	SiP21106DVP-26-E3	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	TSC75-6L	91ub	VR7	9m	Vs
BR	-	XC6221B2317R	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BR	-	XC6223D32B9R-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BR	-	XC9244A3AC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BR0	-	XC9261B20CER-G	DC-DC-IC	PWM/PFM step-down, 2.0V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BR01	-	RP400K001B	DC-DC-IC	PWM step-up, 700kHz, Adj. 1.8..5V, 200mA	DFN1820-6	74	-	9b	Ric
BR02	-	RP400K181B	DC-DC-IC	PWM step-up, 700kHz, 1.8V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR03	-	RP400K191B	DC-DC-IC	PWM step-up, 700kHz, 1.9V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR04	-	RP400K201B	DC-DC-IC	PWM step-up, 700kHz, 2.0V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR05	-	RP400K211B	DC-DC-IC	PWM step-up, 700kHz, 2.1V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR06	-	RP400K221B	DC-DC-IC	PWM step-up, 700kHz, 2.2V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR07	-	RP400K231B	DC-DC-IC	PWM step-up, 700kHz, 2.3V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR08	-	RP400K241B	DC-DC-IC	PWM step-up, 700kHz, 2.4V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR09	-	RP400K251B	DC-DC-IC	PWM step-up, 700kHz, 2.5V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric




SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BR1	-	XC9261B21CER-G	DC-DC-IC	PWM/PFM step-down, 2.1V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BR10	-	RP400K261B	DC-DC-IC	PWM step-up, 700kHz, 2.6V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR11	-	RP400K271B	DC-DC-IC	PWM step-up, 700kHz, 2.7V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR12	-	RP400K281B	DC-DC-IC	PWM st-up, 700kHz, 2.8V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR13	-	RP400K291B	DC-DC-IC	PWM st-up, 700kHz, 2.9V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR14	-	RP400K301B	DC-DC-IC	PWM st-up, 700kHz, 3.0V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR15	-	RP400K311B	DC-DC-IC	PWM st-up, 700kHz, 3.1V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR16	-	RP400K321B	DC-DC-IC	PWM st-up, 700kHz, 3.2V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR17	-	RP400K331B	DC-DC-IC	PWM st-up, 700kHz, 3.3V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR18	-	RP400K341B	DC-DC-IC	PWM st-up, 700kHz, 3.4V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR19	-	RP400K351B	DC-DC-IC	PWM st-up, 700kHz, 3.5V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR2	-	XC9261B22CER-G	DC-DC-IC	PWM/PFM step-down, 2.2V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BR20	-	RP400K361B	DC-DC-IC	PWM st-up, 700kHz, 3.6V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR21	-	RP400K371B	DC-DC-IC	PWM st-up, 700kHz, 3.7V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR22	-	RP400K381B	DC-DC-IC	PWM st-up, 700kHz, 3.8V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR23	-	RP400K391B	DC-DC-IC	PWM st-up, 700kHz, 3.9V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR24	-	RP400K401B	DC-DC-IC	PWM st-up, 700kHz, 4.0V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR25	-	RP400K411B	DC-DC-IC	PWM st-up, 700kHz, 4.1V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR26	-	RP400K421B	DC-DC-IC	PWM st-up, 700kHz, 4.2V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR27	-	RP400K431B	DC-DC-IC	PWM st-up, 700kHz, 4.3V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR28	-	RP400K441B	DC-DC-IC	PWM st-up, 700kHz, 4.4V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR29	-	RP400K451B	DC-DC-IC	PWM st-up, 700kHz, 4.5V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR3	-	XC9261B23CER-G	DC-DC-IC	PWM/PFM step-down, 2.3V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BR30	-	RP400K461B	DC-DC-IC	PWM st-up, 700kHz, 4.6V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR31	-	RP400K471B	DC-DC-IC	PWM st-up, 700kHz, 4.7V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR32	-	RP400K481B	DC-DC-IC	PWM st-up, 700kHz, 4.8V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR33	-	RP400K491B	DC-DC-IC	PWM st-up, 700kHz, 4.9V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR34	-	RP400K501B	DC-DC-IC	PWM st-up, 700kHz, 5.0V±2%, 200mA	DFN1820-6	74gp	DC4	9b	Ric
BR4	-	XC9261B24CER-G	DC-DC-IC	PWM/PFM step-down, 2.4V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BR5	-	XC9261B25CER-G	DC-DC-IC	PWM/PFM step-down, 2.5V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BR6	-	XC9261B26CER-G	DC-DC-IC	PWM/PFM step-down, 2.6V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BR7	-	XC9261B27CER-G	DC-DC-IC	PWM/PFM step-down, 2.7V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BR8	-	XC9261B28CER-G	DC-DC-IC	PWM/PFM step-down, 2.8V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BR9	-	XC9261B29CER-G	DC-DC-IC	PWM/PFM step-down, 2.9V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BRA	-	TC1302BRAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRA	-	XC9261B2ACER-G	DC-DC-IC	PWM/PFM step-down, 2.05V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BRAA	-	TC1301BRAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRAB	-	TC1301BRABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRAC	-	TC1301BRACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRAD	-	TC1301BRADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRAE	-	TC1301BRAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRAF	-	TC1301BRAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRB	-	TC1302BRBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRB	-	XC9261B2BCER-G	DC-DC-IC	PWM/PFM step-down, 2.15V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BRBA	-	TC1301BRBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRBB	-	TC1301BRBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRBC	-	TC1301BRBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRBD	-	TC1301BRBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRBE	-	TC1301BRBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRBF	-	TC1301BRBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRC	-	TC1302BRCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRC	-	XC9261B2CCER-G	DC-DC-IC	PWM/PFM step-down, 2.25V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BRCA	-	TC1301BRCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRCB	-	TC1301BRCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRCC	-	TC1301BRCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRCD	-	TC1301BRCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRCE	-	TC1301BRCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRCF	-	TC1301BRCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRD	-	TC1302BRDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRD	-	XC9261B2DCER-G	DC-DC-IC	PWM/PFM step-down, 2.35V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BRDA	-	TC1301BRDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRDB	-	TC1301BRDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRDC	-	TC1301BRDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRDD	-	TC1301BRDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRDE	-	TC1301BRDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRDF	-	TC1301BRDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRE	-	TC1302BREVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRE	-	XC9261B2ECER-G	DC-DC-IC	PWM/PFM step-down, 2.45V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BREA	-	TC1301BREAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BREB	-	TC1301BREBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BREC	-	TC1301BRECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRED	-	TC1301BREDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BREE	-	TC1301BREEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BREF	-	TC1301BREFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRF	-	TC1302BRFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRF	-	XC9261B2FCER-G	DC-DC-IC	PWM/PFM step-down, 2.55V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BRFA	-	TC1301BRFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRFB	-	TC1301BRFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRFC	-	TC1301BRFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRFD	-	TC1301BRFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRFE	-	TC1301BRFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRFF	-	TC1301BRFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRG	-	TC1302BRGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRGA	-	TC1301BRGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRGB	-	TC1301BRGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRGC	-	TC1301BRGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRGD	-	TC1301BRGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRGE	-	TC1301BRGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRGF	-	TC1301BRGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRH	-	TC1302BRHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRH	-	XC9261B2HCER-G	DC-DC-IC	PWM/PFM step-down, 2.65V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BRHA	-	TC1301BRHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRHB	-	TC1301BRHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRHC	-	TC1301BRHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRHD	-	TC1301BRHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRHE	-	TC1301BRHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRHF	-	TC1301BRHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRI	-	TC1302BRIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRIA	-	TC1301BRIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRIB	-	TC1301BRIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRIC	-	TC1301BRICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRID	-	TC1301BRIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRIE	-	TC1301BRIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRIF	-	TC1301BRIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRJ	-	TC1302BRJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRJA	-	TC1301BRJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRJB	-	TC1301BRJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRJC	-	TC1301BRJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRJD	-	TC1301BRJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRJE	-	TC1301BRJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRJF	-	TC1301BRJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRK	-	TC1302BRKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRK	-	XC9261B2KCER-G	DC-DC-IC	PWM/PFM step-down, 2.75V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BRKA	-	TC1301BRKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRKB	-	TC1301BRKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRKC	-	TC1301BRKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRKD	-	TC1301BRKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRKE	-	TC1301BRKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRKF	-	TC1301BRKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRL	-	TC1302BRLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRL	-	XC9261B2LCER-G	DC-DC-IC	PWM/PFM step-down, 2.85V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BRLA	-	TC1301BRLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRLB	-	TC1301BRLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRLC	-	TC1301BRLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRLD	-	TC1301BRLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRLE	-	TC1301BRLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRLF	-	TC1301BRLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRM	-	TC1302BRMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRM	-	XC9261B2MCER-G	DC-DC-IC	PWM/PFM step-down, 2.95V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BRMA	-	TC1301BRMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRMB	-	TC1301BRMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRMC	-	TC1301BRMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRMD	-	TC1301BRMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRME	-	TC1301BRMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRMF	-	TC1301BRMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRN	-	TC1302BRNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRNA	-	TC1301BRNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRNB	-	TC1301BRNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRNC	-	TC1301BRNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRND	-	TC1301BRNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BRNE	-	TC1301BRNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRNF	-	TC1301BRNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRO	-	TC1302BROVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BROA	-	TC1301BROAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BROB	-	TC1301BROBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BROC	-	TC1301BROCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BROD	-	TC1301BRODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BROE	-	TC1301BROEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BROF	-	TC1301BROFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRP	-	TC1302BRPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRPA	-	TC1301BRPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRPB	-	TC1301BRPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRPC	-	TC1301BRPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRPD	-	TC1301BRPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRPE	-	TC1301BRPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRPF	-	TC1301BRPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRQ	-	TC1302BRQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRQA	-	TC1301BRQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRQB	-	TC1301BRQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRQC	-	TC1301BRQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRQD	-	TC1301BRQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRQE	-	TC1301BRQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRQF	-	TC1301BRQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRR	-	TC1302BRRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRRA	-	TC1301BRRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRRB	-	TC1301BRRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRRC	-	TC1301BRRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRRD	-	TC1301BRRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRRE	-	TC1301BRREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRRF	-	TC1301BRRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRS	-	TC1302BRSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRSA	-	TC1301BRSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRSB	-	TC1301BRSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRSC	-	TC1301BRSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRSD	-	TC1301BRSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRSE	-	TC1301BRSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRSF	-	TC1301BRSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRT	-	TC1302BRTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRTA	-	TC1301BRTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRTB	-	TC1301BRTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRTC	-	TC1301BRTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRTD	-	TC1301BRTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRTE	-	TC1301BRTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRTF	-	TC1301BRTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRU	-	TC1302BRUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRU	-	TPA6130A2YZH	Lin-IC	AF PA, 2.5..5.5V, 2x130mW(4V/16Ω), shutdown	BGA-16	39	-	9a	Ti
BRUA	-	TC1301BRUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRUB	-	TC1301BRUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRUC	-	TC1301BRUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRUD	-	TC1301BRUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRUE	-	TC1301BRUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRUF	-	TC1301BRUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRV	-	TC1302BRVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRVA	-	TC1301BRVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRVB	-	TC1301BRVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRVC	-	TC1301BRVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRVD	-	TC1301BRVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRVE	-	TC1301BRVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRVF	-	TC1301BRVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRW	-	TC1302BRWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BRWA	-	TC1301BRWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRWB	-	TC1301BRWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRWC	-	TC1301BRWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRWD	-	TC1301BRWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRWE	-	TC1301BRWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BRWF	-	TC1301BRWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.6V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BS	-	RP104K311C	LVR-IC	LDO, 3.1V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BS	-	RT9193T-18PQW	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
BS	-	XC6221B2417R	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BS	-	XC6223D33B9R-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BS	-	XC9244A3BC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BSA	-	TC1302BSAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSAA	-	TC1301BSAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSAB	-	TC1301BSABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSAC	-	TC1301BSACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSAD	-	TC1301BSADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSAE	-	TC1301BSAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSAF	-	TC1301BSAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSB	-	TC1302BSBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSBA	-	TC1301BSBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSBB	-	TC1301BSBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSBC	-	TC1301BSBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSBD	-	TC1301BSBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSBE	-	TC1301BSBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSBF	-	TC1301BSBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSC	-	TC1302BSCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSCA	-	TC1301BSCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSCB	-	TC1301BSCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSCC	-	TC1301BSCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSCD	-	TC1301BSCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSCE	-	TC1301BSCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSCF	-	TC1301BSCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSD	-	TC1302BSDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSDA	-	TC1301BSDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSDB	-	TC1301BSDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSDC	-	TC1301BSDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSDD	-	TC1301BSDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSDE	-	TC1301BSDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSDF	-	TC1301BSDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSE	-	TC1302BSEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSEA	-	TC1301BSEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSEB	-	TC1301BSEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSEC	-	TC1301BSECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSED	-	TC1301BSEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSEE	-	TC1301BSEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSEF	-	TC1301BSEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSF	-	MIC5321-3.3/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.5V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BSF	-	TC1302BSFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSFA	-	TC1301BSFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSFB	-	TC1301BSFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSFC	-	TC1301BSFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSFD	-	TC1301BSFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSFE	-	TC1301BSFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSFF	-	TC1301BSFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSG	-	MIC5321-3.3/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BSG	-	TC1302BSGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSG	-	TPA6130A2RTJ	Lin-IC	AF PA, 2.5..5.5V, 2x130mW(4V/16Ω), shutdown	QFN-20	38	-	9a	Ti
BSGA	-	TC1301BSGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSGB	-	TC1301BSGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSGC	-	TC1301BSGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSGD	-	TC1301BSGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSGE	-	TC1301BSGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSGF	-	TC1301BSGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSH	-	TC1302BSHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSHA	-	TC1301BSHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSHB	-	TC1301BSHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSHC	-	TC1301BSHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSHD	-	TC1301BSHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSHE	-	TC1301BSHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSHF	-	TC1301BSHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSI	-	TC1302BSIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSIA	-	TC1301BSIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSIB	-	TC1301BSIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSIC	-	TC1301BSICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSID	-	TC1301BSIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSIE	-	TC1301BSIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSIF	-	TC1301BSIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSJ	-	MIC5321-3.3/2.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.5V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BSJ	-	TC1302BSJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSJA	-	TC1301BSJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BSJB	-	TC1301BSJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSJC	-	TC1301BSJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSJD	-	TC1301BSJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSJE	-	TC1301BSJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSJF	-	TC1301BSJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSK	-	MIC5321-3.3/2.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.6V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BSK	-	TC1302BSKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSKA	-	TC1301BSKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSKB	-	TC1301BSKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSKC	-	TC1301BSKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSKD	-	TC1301BSKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSKE	-	TC1301BSKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSKF	-	TC1301BSKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSL	-	MIC5321-3.3/2.7YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.7V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BSL	-	TC1302BSLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSLA	-	TC1301BSLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSLB	-	TC1301BSLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSLC	-	TC1301BSLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSLD	-	TC1301BSLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSLE	-	TC1301BSLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSLF	-	TC1301BSLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSM	-	MIC5321-3.3/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BSM	-	TC1302BSMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSMA	-	TC1301BSMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSMB	-	TC1301BSMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSMC	-	TC1301BSMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSMD	-	TC1301BSMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSME	-	TC1301BSMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSMF	-	TC1301BSMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSN	-	MIC5321-3.3/2.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.85V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BSN	-	TC1302BSNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSNA	-	TC1301BSNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSNB	-	TC1301BSNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSNC	-	TC1301BSNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSND	-	TC1301BSNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSNE	-	TC1301BSNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSNF	-	TC1301BSNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSO	-	MIC5321-3.3/2.9YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.9V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BSO	-	TC1302BSOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSOA	-	TC1301BSOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSOB	-	TC1301BSOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSOC	-	TC1301BSOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSOD	-	TC1301BSODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSOE	-	TC1301BSOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSOF	-	TC1301BSOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSP	-	MIC5321-3.3/3.0YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.0V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BSP	-	TC1302BSPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSPA	-	TC1301BSPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSPB	-	TC1301BSPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSPC	-	TC1301BSPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSPD	-	TC1301BSPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSPE	-	TC1301BSPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSPF	-	TC1301BSPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSQ	-	TC1302BSQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSQA	-	TC1301BSQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSQB	-	TC1301BSQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSQC	-	TC1301BSQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSQD	-	TC1301BSQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSQE	-	TC1301BSQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSQF	-	TC1301BSQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSR	-	MIC5321-3.3/3.2YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.2V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BSR	-	TC1302BSRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSRA	-	TC1301BSRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSRB	-	TC1301BSRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSRC	-	TC1301BSRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSRD	-	TC1301BSRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSRE	-	TC1301BSREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSRF	-	TC1301BSRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSS	-	MIC5321-3.3/3.3YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±2%, 150mA, +CE	MLF-6	74g2	VR31	9x	Mcr
BSS	-	TC1302BSSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BSSA	-	TC1301BSSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSSB	-	TC1301BSSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSSC	-	TC1301BSSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSSD	-	TC1301BSSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSSE	-	TC1301BSSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSSF	-	TC1301BSSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BST	-	TC1302BSTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSTA	-	TC1301BSTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSTB	-	TC1301BSTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSTC	-	TC1301BSTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSTD	-	TC1301BSTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSTE	-	TC1301BSTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSTF	-	TC1301BSTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSU	-	TC1302BSUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSUA	-	TC1301BSUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSUB	-	TC1301BSUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSUC	-	TC1301BSUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSUD	-	TC1301BSUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSUE	-	TC1301BSUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSUF	-	TC1301BSUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSV	-	TC1302BSVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSVA	-	TC1301BSVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSVB	-	TC1301BSVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSVC	-	TC1301BSVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSVD	-	TC1301BSVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSVE	-	TC1301BSVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSVF	-	TC1301BSVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSW	-	TC1302BSWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BSWA	-	TC1301BSWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSWB	-	TC1301BSWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSWC	-	TC1301BSWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSWD	-	TC1301BSWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSWE	-	TC1301BSWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BSWF	-	TC1301BSWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.5V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BT	-	RP104K241C	LVR-IC	LDO, 2.4V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BT	-	SiP21106DVP-28-E3	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	TSC75-6L	91ub	VR7	9m	Vs
BT	-	XC6221B2517R	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BT	-	XC6223D34B9R-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BT	-	XC9244A3CC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BT0	-	XC9261B30CER-G	DC-DC-IC	PWM/PFM step-down, 3.0V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BT08	-	RP503L081A	DC-DC-IC	PWM/VFM step-down, 0.8V±18mV, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT09	-	RP503L091A	DC-DC-IC	PWM/VFM step-down, 0.9V±18mV, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT1	-	XC9261B31CER-G	DC-DC-IC	PWM/PFM step-down, 3.1V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BT10	-	RP503L101A	DC-DC-IC	PWM/VFM step-down, 1.0V±18mV, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT11	-	RP503L111A	DC-DC-IC	PWM/VFM step-down, 1.1V±18mV, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT12	-	RP503L121A	DC-DC-IC	PWM/VFM step-down, 1.2V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT13	-	RP503L131A	DC-DC-IC	PWM/VFM step-down, 1.3V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT14	-	RP503L141A	DC-DC-IC	PWM/VFM step-down, 1.4V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT15	-	RP503L151A	DC-DC-IC	PWM/VFM step-down, 1.5V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT16	-	RP503L161A	DC-DC-IC	PWM/VFM step-down, 1.6V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT17	-	RP503L171A	DC-DC-IC	PWM/VFM step-down, 1.7V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT18	-	RP503L181A	DC-DC-IC	PWM/VFM step-down, 1.8V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT19	-	RP503L191A	DC-DC-IC	PWM/VFM step-down, 1.9V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT2	-	XC9261B32CER-G	DC-DC-IC	PWM/PFM step-down, 3.2V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BT20	-	RP503L201A	DC-DC-IC	PWM/VFM step-down, 2.0V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT21	-	RP503L211A	DC-DC-IC	PWM/VFM step-down, 2.1V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT22	-	RP503L221A	DC-DC-IC	PWM/VFM step-down, 2.2V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT23	-	RP503L231A	DC-DC-IC	PWM/VFM step-down, 2.3V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT24	-	RP503L241A	DC-DC-IC	PWM/VFM step-down, 2.4V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT25	-	RP503L251A	DC-DC-IC	PWM/VFM step-down, 2.5V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT26	-	RP503L121A5	DC-DC-IC	PWM/VFM step-down, 1.25V±1.5%, 600mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BT3	-	XC9261B33CER-G	DC-DC-IC	PWM/PFM step-down, 3.3V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BT4	-	XC9261B34CER-G	DC-DC-IC	PWM/PFM step-down, 3.4V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BT5	-	XC9261B35CER-G	DC-DC-IC	PWM/PFM step-down, 3.5V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BT6	-	XC9261B36CER-G	DC-DC-IC	PWM/PFM step-down, 3.6V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BTA	-	TC1302BTAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTA	-	XC9261B3ACER-G	DC-DC-IC	PWM/PFM step-down, 3.05V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BTAA	-	TC1301BTAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTAB	-	TC1301BTABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTAC	-	TC1301BTACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BTAD	-	TC1301BTADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTAE	-	TC1301BTAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTAF	-	TC1301BTAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTB	-	TC1302BTBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTB	-	XC9261B3BCER-G	DC-DC-IC	PWM/PFM step-down, 3.15V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BTBA	-	TC1301BTBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTBB	-	TC1301BTBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTBC	-	TC1301BTBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTBD	-	TC1301BTBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTBE	-	TC1301BTBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTBF	-	TC1301BTBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTC	-	TC1302BTCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTC	-	XC9261B3CCER-G	DC-DC-IC	PWM/PFM step-down, 3.25V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BTCA	-	TC1301BTCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTCB	-	TC1301BTCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTCC	-	TC1301BTCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTCD	-	TC1301BTCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTCE	-	TC1301BTCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTCF	-	TC1301BTCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTD	-	TC1302BTDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTD	-	XC9261B3DCER-G	DC-DC-IC	PWM/PFM step-down, 3.35V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BTDA	-	TC1301BTDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTDB	-	TC1301BTDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTDC	-	TC1301BTDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTDD	-	TC1301BTDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTDE	-	TC1301BTDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTDF	-	TC1301BTDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTE	-	TC1302BTEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTE	-	XC9261B3ECER-G	DC-DC-IC	PWM/PFM step-down, 3.45V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BTEA	-	TC1301BTEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTEB	-	TC1301BTEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTEC	-	TC1301BTECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTED	-	TC1301BTEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTEE	-	TC1301BTEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTEF	-	TC1301BTEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTF	-	TC1302BTFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTF	-	XC9261B3FCER-G	DC-DC-IC	PWM/PFM step-down, 3.55V±2%, 1.5A, 1.2MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BTFA	-	TC1301BTFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTFB	-	TC1301BTFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTFC	-	TC1301BTFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTFD	-	TC1301BTFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTFE	-	TC1301BTFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTFF	-	TC1301BTFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTG	-	TC1302BTGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTGA	-	TC1301BTGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTGB	-	TC1301BTGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTGC	-	TC1301BTGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTGD	-	TC1301BTGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTGE	-	TC1301BTGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTGF	-	TC1301BTGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTH	-	TC1302BTHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTH	-	TPA2013D1YZH	Lin-IC	AF PA, BTL, class-D, 3..5.5V, 2.7W(5V/4Ω), shutdown	BGA-16	39	-	9a	Ti
BTHA	-	TC1301BTHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTHB	-	TC1301BTHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTHC	-	TC1301BTHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTHD	-	TC1301BTHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTHE	-	TC1301BTHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTHF	-	TC1301BTHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTI	-	TC1302BTIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTI	-	TPA2013D1RGP	Lin-IC	AF PA, BTL, class-D, 3..5.5V, 2.7W(5V/4Ω), shutdown	QFN-20	38	-	9a	Ti
BTIA	-	TC1301BTIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTIB	-	TC1301BTIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTIC	-	TC1301BTICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTID	-	TC1301BTIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTIE	-	TC1301BTIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTIF	-	TC1301BTIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTJ	-	TC1302BTJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTJA	-	TC1301BTJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTJB	-	TC1301BTJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTJC	-	TC1301BTJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BTJD	-	TC1301BTJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTJE	-	TC1301BTJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTJF	-	TC1301BTJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTK	-	TC1302BTKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTKA	-	TC1301BTKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTKB	-	TC1301BTKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTKC	-	TC1301BTKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTKD	-	TC1301BTKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTKE	-	TC1301BTKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTKF	-	TC1301BTKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTL	-	TC1302BTLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTLA	-	TC1301BTLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTLB	-	TC1301BTLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTLC	-	TC1301BTLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTLD	-	TC1301BTLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTLE	-	TC1301BTLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTLF	-	TC1301BTLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTM	-	TC1302BTMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTMA	-	TC1301BTMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTMB	-	TC1301BTMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTMC	-	TC1301BTMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTMD	-	TC1301BTMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTME	-	TC1301BTMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTMF	-	TC1301BTMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTN	-	TC1302BTNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTNA	-	TC1301BTNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTNB	-	TC1301BTNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTNC	-	TC1301BTNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTND	-	TC1301BTNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTNE	-	TC1301BTNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTNF	-	TC1301BTNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTO	-	TC1302BTOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTOA	-	TC1301BTOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTOB	-	TC1301BTOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTOC	-	TC1301BTOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTOD	-	TC1301BTODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTOE	-	TC1301BTOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTOF	-	TC1301BTOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTP	-	TC1302BTPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTPA	-	TC1301BTPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTPB	-	TC1301BTPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTPC	-	TC1301BTPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTPD	-	TC1301BTPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTPE	-	TC1301BTPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTPF	-	TC1301BTPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTQ	-	TC1302BTQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTQ	-	TPA2006D1DRB	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 1.45W(5V/8Ω), shutdown	DFN-8	92	AFP24	9a	Ti
BTQA	-	TC1301BTQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTQB	-	TC1301BTQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTQC	-	TC1301BTQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTQD	-	TC1301BTQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTQE	-	TC1301BTQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTQF	-	TC1301BTQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTR	-	TC1302BTRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTRA	-	TC1301BTRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTRB	-	TC1301BTRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTRC	-	TC1301BTRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTRD	-	TC1301BTRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTRE	-	TC1301BTREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTRF	-	TC1301BTRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTS	-	TC1302BTSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTSA	-	TC1301BTSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTSB	-	TC1301BTSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTSC	-	TC1301BTSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTSD	-	TC1301BTSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTSE	-	TC1301BTSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTSF	-	TC1301BTSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTT	-	TC1302BTTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTTA	-	TC1301BTTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTTB	-	TC1301BTTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BTTC	-	TC1301BTTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTTD	-	TC1301BTTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTTE	-	TC1301BTTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTTF	-	TC1301BTTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTU	-	TC1302BTUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTUA	-	TC1301BTUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTUB	-	TC1301BTUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTUC	-	TC1301BTUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTUD	-	TC1301BTUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTUE	-	TC1301BTUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTUF	-	TC1301BTUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTV	-	TC1302BTVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTVA	-	TC1301BTVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTVB	-	TC1301BTVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTVC	-	TC1301BTVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTVD	-	TC1301BTVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTVE	-	TC1301BTVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTVF	-	TC1301BTVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTW	-	TC1302BTWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BTWA	-	TC1301BTWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTWB	-	TC1301BTWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTWC	-	TC1301BTWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTWD	-	TC1301BTWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTWE	-	TC1301BTWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BTWF	-	TC1301BTWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BU	-	RP104K221C	LVR-IC	LDO, 2.2V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BU	-	XC6221B2617R	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BU	-	XC6223D35B9R-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BU	-	XC9244A3DC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BU08	-	RP503L082A	DC-DC-IC	PWM/VFM step-down, 0.8V±18mV, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU09	-	RP503L092A	DC-DC-IC	PWM/VFM step-down, 0.9V±18mV, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU10	-	RP503L102A	DC-DC-IC	PWM/VFM step-down, 1.0V±18mV, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU11	-	RP503L112A	DC-DC-IC	PWM/VFM step-down, 1.1V±18mV, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU12	-	RP503L122A	DC-DC-IC	PWM/VFM step-down, 1.2V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU13	-	RP503L132A	DC-DC-IC	PWM/VFM step-down, 1.3V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU14	-	RP503L142A	DC-DC-IC	PWM/VFM step-down, 1.4V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU15	-	RP503L152A	DC-DC-IC	PWM/VFM step-down, 1.5V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU16	-	RP503L162A	DC-DC-IC	PWM/VFM step-down, 1.6V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU17	-	RP503L172A	DC-DC-IC	PWM/VFM step-down, 1.7V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU18	-	RP503L182A	DC-DC-IC	PWM/VFM step-down, 1.8V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU19	-	RP503L192A	DC-DC-IC	PWM/VFM step-down, 1.9V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU20	-	RP503L202A	DC-DC-IC	PWM/VFM step-down, 2.0V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU21	-	RP503L212A	DC-DC-IC	PWM/VFM step-down, 2.1V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU22	-	RP503L222A	DC-DC-IC	PWM/VFM step-down, 2.2V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU23	-	RP503L232A	DC-DC-IC	PWM/VFM step-down, 2.3V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU24	-	RP503L242A	DC-DC-IC	PWM/VFM step-down, 2.4V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU25	-	RP503L252A	DC-DC-IC	PWM/VFM step-down, 2.5V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU26	-	RP503L122A5	DC-DC-IC	PWM/VFM step-down, 1.25V±1.5%, 600mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BU8	-	XC9261B08DER-G	DC-DC-IC	PWM/PFM step-down, 0.8V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BU9	-	XC9261B09DER-G	DC-DC-IC	PWM/PFM step-down, 0.9V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BUA	-	TC1302BUAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUAA	-	TC1301BUAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUAB	-	TC1301BUABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUAC	-	TC1301BUACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUAD	-	TC1301BUADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUAE	-	TC1301BUAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUAF	-	TC1301BUAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUB	-	TC1302BUBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUBA	-	TC1301BUBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUBB	-	TC1301BUBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUBC	-	TC1301BUBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUBD	-	TC1301BUBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUBE	-	TC1301BUBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUBF	-	TC1301BUBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUC	-	TC1302BUCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUCA	-	TC1301BUCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUCB	-	TC1301BUCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUCC	-	TC1301BUCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUCD	-	TC1301BUCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUCE	-	TC1301BUCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BUCF	-	TC1301BUCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUD	-	TC1302BUDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUDA	-	TC1301BUDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUDB	-	TC1301BUDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUDC	-	TC1301BUDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUDD	-	TC1301BUDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUDE	-	TC1301BUDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUDF	-	TC1301BUDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUE	-	TC1302BUEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUEA	-	TC1301BUEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUEB	-	TC1301BUEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUEC	-	TC1301BUECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUED	-	TC1301BUEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUEE	-	TC1301BUEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUEF	-	TC1301BUEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUF	-	TC1302BUFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUFA	-	TC1301BUFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUFB	-	TC1301BUFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUFC	-	TC1301BUFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUFD	-	TC1301BUFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUFE	-	TC1301BUFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUFF	-	TC1301BUFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUG	-	TC1302BUGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUGA	-	TC1301BUGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUGB	-	TC1301BUGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUGC	-	TC1301BUGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUGD	-	TC1301BUGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUGE	-	TC1301BUGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUGF	-	TC1301BUGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUH	-	TC1302BUHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUHA	-	TC1301BUHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUHB	-	TC1301BUHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUHC	-	TC1301BUHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUHD	-	TC1301BUHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUHE	-	TC1301BUHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUHF	-	TC1301BUHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUI	-	TC1302BUIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUIA	-	TC1301BUIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUIB	-	TC1301BUIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUIC	-	TC1301BUICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUID	-	TC1301BUIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUIE	-	TC1301BUIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUIF	-	TC1301BUIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUJ	-	TC1302BUJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUJA	-	TC1301BUJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUJB	-	TC1301BUJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUJC	-	TC1301BUJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUJD	-	TC1301BUJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUJE	-	TC1301BUJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUJF	-	TC1301BUJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUK	-	TC1302BUKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUKA	-	TC1301BUKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUKB	-	TC1301BUKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUKC	-	TC1301BUKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUKD	-	TC1301BUKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUKE	-	TC1301BUKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUKF	-	TC1301BUKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUL	-	TC1302BULVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUL	-	XC9261B0LDER-G	DC-DC-IC	PWM/PFM step-down, 0.85V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BULA	-	TC1301BULAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BULB	-	TC1301BULBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BULC	-	TC1301BULCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BULD	-	TC1301BULDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BULE	-	TC1301BULEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BULF	-	TC1301BULFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUM	-	TC1302BUMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUM	-	XC9261B0MDER-G	DC-DC-IC	PWM/PFM step-down, 0.95V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BUMA	-	TC1301BUMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUMB	-	TC1301BUMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUMC	-	TC1301BUMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BUMD	-	TC1301BUMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUME	-	TC1301BUMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUMF	-	TC1301BUMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUN	-	TC1302BUNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUNA	-	TC1301BUNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUNB	-	TC1301BUNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUNC	-	TC1301BUNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUND	-	TC1301BUNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUNE	-	TC1301BUNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUNF	-	TC1301BUNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUO	-	TC1302BUOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUOA	-	TC1301BUOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUOB	-	TC1301BUOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUOC	-	TC1301BUOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUOD	-	TC1301BUODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUOE	-	TC1301BUOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUOF	-	TC1301BUOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUP	-	TC1302BUPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUPA	-	TC1301BUPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUPB	-	TC1301BUPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUPC	-	TC1301BUPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUPD	-	TC1301BUPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUPE	-	TC1301BUPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUPF	-	TC1301BUPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUQ	-	TC1302BUQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUQA	-	TC1301BUQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUQB	-	TC1301BUQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUQC	-	TC1301BUQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUQD	-	TC1301BUQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUQE	-	TC1301BUQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUQF	-	TC1301BUQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUR	-	TC1302BURVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BURA	-	TC1301BURAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BURB	-	TC1301BURBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BURC	-	TC1301BURCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BURD	-	TC1301BURDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BURE	-	TC1301BUREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BURF	-	TC1301BURFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUS	-	TC1302BUSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUSA	-	TC1301BUSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUSB	-	TC1301BUSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUSC	-	TC1301BUSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUSD	-	TC1301BUSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUSE	-	TC1301BUSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUSF	-	TC1301BUSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUT	-	TC1302BUTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUTA	-	TC1301BUTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUTB	-	TC1301BUTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUTC	-	TC1301BUTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUTD	-	TC1301BUTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUTE	-	TC1301BUTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUTF	-	TC1301BUTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUU	-	TC1302BUUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUUA	-	TC1301BUUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUUB	-	TC1301BUUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUUC	-	TC1301BUUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUUD	-	TC1301BUUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUUE	-	TC1301BUUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUUF	-	TC1301BUUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUV	-	TC1302BUVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUVA	-	TC1301BUVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUVB	-	TC1301BUVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUVC	-	TC1301BUVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUVD	-	TC1301BUVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUVE	-	TC1301BUVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUVF	-	TC1301BUVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUW	-	TC1302BUWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BUWA	-	TC1301BUWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUWB	-	TC1301BUWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUWC	-	TC1301BUWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BUWD	-	TC1301BUWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUWE	-	TC1301BUWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BUWF	-	TC1301BUWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BV	-	RP104K231C	LVR-IC	LDO, 2.3V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BV	-	SiP21106DVP-30-E3	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	TSC75-6L	91ub	VR7	9m	Vs
BV	-	XC6221B2717R	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BV	-	XC6223D36B9R-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BV	-	XC9244A3EC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BV0	-	XC9261B10DER-G	DC-DC-IC	PWM/PFM step-down, 1.0V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BV1	-	XC9261B11DER-G	DC-DC-IC	PWM/PFM step-down, 1.1V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BV10	-	RP501K101A	DC-DC-IC	PWM/VFM-PWM st-down, 1.0V±24mA, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV11	-	RP501K111A	DC-DC-IC	PWM/VFM-PWM st-down, 1.1V±24mA, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV12	-	RP501K121A	DC-DC-IC	PWM/VFM-PWM st-down, 1.2V±24mA, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV13	-	RP501K131A	DC-DC-IC	PWM/VFM-PWM st-down, 1.3V±24mA, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV14	-	RP501K141A	DC-DC-IC	PWM/VFM-PWM st-down, 1.4V±24mA, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV15	-	RP501K151A	DC-DC-IC	PWM/VFM-PWM st-down, 1.5V±24mA, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV16	-	RP501K161A	DC-DC-IC	PWM/VFM-PWM st-down, 1.6V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV17	-	RP501K171A	DC-DC-IC	PWM/VFM-PWM st-down, 1.7V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV18	-	RP501K181A	DC-DC-IC	PWM/VFM-PWM st-down, 1.8V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV19	-	RP501K191A	DC-DC-IC	PWM/VFM-PWM st-down, 1.9V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV2	-	XC9261B12DER-G	DC-DC-IC	PWM/PFM step-down, 1.2V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BV20	-	RP501K201A	DC-DC-IC	PWM/VFM-PWM st-down, 2.0V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV21	-	RP501K211A	DC-DC-IC	PWM/VFM-PWM st-down, 2.1V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV22	-	RP501K221A	DC-DC-IC	PWM/VFM-PWM st-down, 2.2V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV23	-	RP501K231A	DC-DC-IC	PWM/VFM-PWM st-down, 2.3V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV24	-	RP501K241A	DC-DC-IC	PWM/VFM-PWM st-down, 2.4V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV25	-	RP501K251A	DC-DC-IC	PWM/VFM-PWM st-down, 2.5V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV26	-	RP501K261A	DC-DC-IC	PWM/VFM-PWM st-down, 2.6V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV27	-	RP501K271A	DC-DC-IC	PWM/VFM-PWM st-down, 2.7V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV28	-	RP501K281A	DC-DC-IC	PWM/VFM-PWM st-down, 2.8V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV29	-	RP501K291A	DC-DC-IC	PWM/VFM-PWM st-down, 2.9V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV3	-	XC9261B13DER-G	DC-DC-IC	PWM/PFM step-down, 1.3V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BV30	-	RP501K301A	DC-DC-IC	PWM/VFM-PWM st-down, 3.0V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV31	-	RP501K311A	DC-DC-IC	PWM/VFM-PWM st-down, 3.1V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV32	-	RP501K321A	DC-DC-IC	PWM/VFM-PWM st-down, 3.2V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV33	-	RP501K331A	DC-DC-IC	PWM/VFM-PWM st-down, 3.3V±1.5%, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV34	-	RP501K121A5	DC-DC-IC	PWM/VFM-PWM st-down, 1.25V±24mA, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV35	-	RP501K131A5	DC-DC-IC	PWM/VFM-PWM st-down, 1.35V±24mA, 1A, +CE, Mode	DFN2527-10	37	DC8	9b	Ric
BV4	-	XC9261B14DER-G	DC-DC-IC	PWM/PFM step-down, 1.4V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BV5	-	XC9261B15DER-G	DC-DC-IC	PWM/PFM step-down, 1.5V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BV6	-	XC9261B16DER-G	DC-DC-IC	PWM/PFM step-down, 1.6V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BV7	-	XC9261B17DER-G	DC-DC-IC	PWM/PFM step-down, 1.7V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BV8	-	XC9261B18DER-G	DC-DC-IC	PWM/PFM step-down, 1.8V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BV9	-	XC9261B19DER-G	DC-DC-IC	PWM/PFM step-down, 1.9V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BVA	-	TC1302BVAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVA	-	XC9261B1ADER-G	DC-DC-IC	PWM/PFM step-down, 1.05V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BVAA	-	TC1301BVAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVAB	-	TC1301BVABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVAC	-	TC1301BVACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVAD	-	TC1301BVADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVAE	-	TC1301BVAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVAF	-	TC1301BVAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVB	-	TC1302BVBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVB	-	XC9261B1BDER-G	DC-DC-IC	PWM/PFM step-down, 1.15V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BVBA	-	TC1301BVBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVBB	-	TC1301BVBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVBC	-	TC1301BVBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVBD	-	TC1301BVBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVBE	-	TC1301BVBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVBF	-	TC1301BVBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVC	-	TC1302BVCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVC	-	XC9261B1CDER-G	DC-DC-IC	PWM/PFM step-down, 1.25V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BVCA	-	TC1301BVCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVCB	-	TC1301BVCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVCC	-	TC1301BVCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVCD	-	TC1301BVCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVCE	-	TC1301BVCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVCF	-	TC1301BVCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVD	-	TC1302BVDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVD	-	XC9261B1DDER-G	DC-DC-IC	PWM/PFM step-down, 1.35VV±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVDA	-	TC1301BVDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVDB	-	TC1301BVDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVDC	-	TC1301BVDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVDD	-	TC1301BVDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVDE	-	TC1301BVDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVDF	-	TC1301BVDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVE	-	TC1302BVEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVE	-	XC9261B1EDER-G	DC-DC-IC	PWM/PFM step-down, 1.45V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BVEA	-	TC1301BVEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVEB	-	TC1301BVEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVEC	-	TC1301BVECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVED	-	TC1301BVEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVEE	-	TC1301BVEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVEF	-	TC1301BVEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVF	-	TC1302BVFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVF	-	XC9261B1FDER-G	DC-DC-IC	PWM/PFM step-down, 1.55V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BVFA	-	TC1301BVFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVFB	-	TC1301BVFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVFC	-	TC1301BVFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVFD	-	TC1301BVFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVFE	-	TC1301BVFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVFF	-	TC1301BVFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVG	-	TC1302BVGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVGA	-	TC1301BVGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVGB	-	TC1301BVGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVGC	-	TC1301BVGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVGD	-	TC1301BVGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVGE	-	TC1301BVGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVGF	-	TC1301BVGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVH	-	TC1302BVHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVH	-	XC9261B1HDER-G	DC-DC-IC	PWM/PFM step-down, 1.65V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BVHA	-	TC1301BVHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVHB	-	TC1301BVHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVHC	-	TC1301BVHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVHD	-	TC1301BVHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVHE	-	TC1301BVHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVHF	-	TC1301BVHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVI	-	TC1302BVIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVIA	-	TC1301BVIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVIB	-	TC1301BVIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVIC	-	TC1301BVICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVID	-	TC1301BVIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVIE	-	TC1301BVIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVIF	-	TC1301BVIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVJ	-	TC1302BVJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVJA	-	TC1301BVJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVJB	-	TC1301BVJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVJC	-	TC1301BVJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVJD	-	TC1301BVJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVJE	-	TC1301BVJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVJF	-	TC1301BVJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVK	-	TC1302BVKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVK	-	XC9261B1KDER-G	DC-DC-IC	PWM/PFM step-down, 1.75V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BVKA	-	TC1301BVKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVKB	-	TC1301BVKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVKC	-	TC1301BVKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVKD	-	TC1301BVKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVKE	-	TC1301BVKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVKF	-	TC1301BVKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVL	-	TC1302BVLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVL	-	XC9261B1LDER-G	DC-DC-IC	PWM/PFM step-down, 1.85V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BVLA	-	TC1301BVLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVLB	-	TC1301BVLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVLC	-	TC1301BVLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVLD	-	TC1301BVLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVLE	-	TC1301BVLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVLF	-	TC1301BVLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVM	-	TC1302BVMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVM	-	XC9261B1MDER-G	DC-DC-IC	PWM/PFM step-down, 1.95V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BVMA	-	TC1301BVMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVMB	-	TC1301BVMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVMC	-	TC1301BVMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVMD	-	TC1301BVMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVME	-	TC1301BVMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVMF	-	TC1301BVMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVN	-	TC1302BVNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVNA	-	TC1301BVNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVNB	-	TC1301BVNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVNC	-	TC1301BVNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVND	-	TC1301BVNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVNE	-	TC1301BVNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVNF	-	TC1301BVNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVO	-	TC1302BVOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVOA	-	TC1301BVOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVOB	-	TC1301BVOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVOC	-	TC1301BVOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVOD	-	TC1301BVODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVOE	-	TC1301BVOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVOF	-	TC1301BVOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVP	-	TC1302BVPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVPA	-	TC1301BVPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVPB	-	TC1301BVPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVPC	-	TC1301BVPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVPD	-	TC1301BVPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVPE	-	TC1301BVPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVPF	-	TC1301BVPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVQ	-	TC1302BVQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVQA	-	TC1301BVQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVQB	-	TC1301BVQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVQC	-	TC1301BVQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVQD	-	TC1301BVQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVQE	-	TC1301BVQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVQF	-	TC1301BVQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVR	-	TC1302BVRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVRA	-	TC1301BVRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVRB	-	TC1301BVRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVRC	-	TC1301BVRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVRD	-	TC1301BVRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVRE	-	TC1301BVREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVRF	-	TC1301BVRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVS	-	TC1302BVSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVSA	-	TC1301BVSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVSB	-	TC1301BVSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVSC	-	TC1301BVSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVSD	-	TC1301BVSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVSE	-	TC1301BVSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVSF	-	TC1301BVSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVT	-	TC1302BVTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVTA	-	TC1301BVTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVTB	-	TC1301BVTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVTC	-	TC1301BVTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVTD	-	TC1301BVTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVTE	-	TC1301BVTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVTF	-	TC1301BVTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVU	-	TC1302BVUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVUA	-	TC1301BVUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVUB	-	TC1301BVUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVUC	-	TC1301BVUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVUD	-	TC1301BVUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVUE	-	TC1301BVUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVUF	-	TC1301BVUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVV	-	TC1302BVVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVVA	-	TC1301BVVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVVB	-	TC1301BVVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVVC	-	TC1301BVVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVVD	-	TC1301BVVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVVE	-	TC1301BVVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVVF	-	TC1301BVVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVW	-	TC1302BVWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BVWA	-	TC1301BVWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc






SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BVWB	-	TC1301BVWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVWC	-	TC1301BVWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVWD	-	TC1301BVWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVWE	-	TC1301BVWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BVWF	-	TC1301BVWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.65V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BW	-	RP104K271C5	LVR-IC	LDO, 2.75V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BW	-	RT9198-33PQW	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	WDFN-6	49xu	VR4	9a	Rct
BW10	-	RP501K101B	DC-DC-IC	PWM/VFM-PWM st-down, 1.0V±24mA, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW11	-	RP501K111B	DC-DC-IC	PWM/VFM-PWM st-down, 1.1V±24mA, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW12	-	RP501K121B	DC-DC-IC	PWM/VFM-PWM st-down, 1.2V±24mA, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW13	-	RP501K131B	DC-DC-IC	PWM/VFM-PWM st-down, 1.3V±24mA, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW14	-	RP501K141B	DC-DC-IC	PWM/VFM-PWM st-down, 1.4V±24mA, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW15	-	RP501K151B	DC-DC-IC	PWM/VFM-PWM st-down, 1.5V±24mA, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW16	-	RP501K161B	DC-DC-IC	PWM/VFM-PWM st-down, 1.6V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW17	-	RP501K171B	DC-DC-IC	PWM/VFM-PWM st-down, 1.7V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW18	-	RP501K181B	DC-DC-IC	PWM/VFM-PWM st-down, 1.8V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW19	-	RP501K191B	DC-DC-IC	PWM/VFM-PWM st-down, 1.9V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW20	-	RP501K201B	DC-DC-IC	PWM/VFM-PWM st-down, 2.0V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW21	-	RP501K211B	DC-DC-IC	PWM/VFM-PWM st-down, 2.1V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW22	-	RP501K221B	DC-DC-IC	PWM/VFM-PWM st-down, 2.2V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW23	-	RP501K231B	DC-DC-IC	PWM/VFM-PWM st-down, 2.3V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW24	-	RP501K241B	DC-DC-IC	PWM/VFM-PWM st-down, 2.4V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW25	-	RP501K251B	DC-DC-IC	PWM/VFM-PWM st-down, 2.5V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW26	-	RP501K261B	DC-DC-IC	PWM/VFM-PWM st-down, 2.6V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW27	-	RP501K271B	DC-DC-IC	PWM/VFM-PWM st-down, 2.7V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW28	-	RP501K281B	DC-DC-IC	PWM/VFM-PWM st-down, 2.8V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW29	-	RP501K291B	DC-DC-IC	PWM/VFM-PWM st-down, 2.9V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW30	-	RP501K301B	DC-DC-IC	PWM/VFM-PWM st-down, 3.0V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW31	-	RP501K311B	DC-DC-IC	PWM/VFM-PWM st-down, 3.1V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW32	-	RP501K321B	DC-DC-IC	PWM/VFM-PWM st-down, 3.2V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW33	-	RP501K331B	DC-DC-IC	PWM/VFM-PWM st-down, 3.3V±1.5%, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW34	-	RP501K121B5	DC-DC-IC	PWM/VFM-PWM st-down, 1.25V±24mA, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BW35	-	RP501K131B5	DC-DC-IC	PWM/VFM-PWM st-down, 1.35V±24mA, 1A, +CE, CL, Mode	DFN2527-10	37	DC8	9b	Ric
BWA	-	TC1302BWAVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWAA	-	TC1301BWAAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWAB	-	TC1301BWABVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWAC	-	TC1301BWACVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWAD	-	TC1301BWADVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWAE	-	TC1301BWAEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWAF	-	TC1301BWAFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWB	-	TC1302BWBVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWBA	-	TC1301BWBAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWBB	-	TC1301BWBBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWBC	-	TC1301BWBCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWBD	-	TC1301BWBDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWBE	-	TC1301BWBEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWBF	-	TC1301BWBFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWC	-	TC1302BWCVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWCA	-	TC1301BWCAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWCB	-	TC1301BWCBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWCC	-	TC1301BWCCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWCD	-	TC1301BWCDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWCE	-	TC1301BWCEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWCF	-	TC1301BWCFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWD	-	TC1302BWDVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWDA	-	TC1301BWDAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWDB	-	TC1301BWDBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWDC	-	TC1301BWDCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWDD	-	TC1301BWDDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWDE	-	TC1301BWDEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWDF	-	TC1301BWDFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/3.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWE	-	TC1302BWEVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWEA	-	TC1301BWEAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWEB	-	TC1301BWEBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWEC	-	TC1301BWECVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWED	-	TC1301BWEDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWEE	-	TC1301BWEEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWEF	-	TC1301BWEFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWF	-	TC1302BWFVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWFA	-	TC1301BWFAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWFB	-	TC1301BWFBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWFC	-	TC1301BWFCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWFD	-	TC1301BWFDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWFE	-	TC1301BWFEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWFF	-	TC1301BWFFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWG	-	TC1302BWGVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWGA	-	TC1301BWGAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWGB	-	TC1301BWGBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWGC	-	TC1301BWGCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWGD	-	TC1301BWGDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWGE	-	TC1301BWGEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWGF	-	TC1301BWGFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWH	-	TC1302BWHVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWHA	-	TC1301BWHAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWHB	-	TC1301BWHBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWHC	-	TC1301BWHCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWHD	-	TC1301BWHDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWHE	-	TC1301BWHEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWHF	-	TC1301BWHFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWI	-	TC1302BWIVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWIA	-	TC1301BWIAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWIB	-	TC1301BWIBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWIC	-	TC1301BWICVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWID	-	TC1301BWIDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWIE	-	TC1301BWIEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWIF	-	TC1301BWIFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWJ	-	TC1302BWJVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWJA	-	TC1301BWJAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWJB	-	TC1301BWJBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWJC	-	TC1301BWJCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWJD	-	TC1301BWJDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWJE	-	TC1301BWJEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWJF	-	TC1301BWJFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.4V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWK	-	TC1302BWKVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWKA	-	TC1301BWKAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWKB	-	TC1301BWKBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWKC	-	TC1301BWKCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWKD	-	TC1301BWKDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWKE	-	TC1301BWKEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWKF	-	TC1301BWKFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.3V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWL	-	TC1302BWLVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWLA	-	TC1301BWLAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWLB	-	TC1301BWLBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWLC	-	TC1301BWLCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWLD	-	TC1301BWLDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWLE	-	TC1301BWLEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWLF	-	TC1301BWLFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.2V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWM	-	TC1302BWMVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWMA	-	TC1301BWMAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWMB	-	TC1301BWMBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWMC	-	TC1301BWMCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWMD	-	TC1301BWMDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWME	-	TC1301BWMEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWMF	-	TC1301BWMFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.1V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWN	-	TC1302BWNVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWNA	-	TC1301BWNAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWNB	-	TC1301BWNBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWNC	-	TC1301BWNCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWND	-	TC1301BWNDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWNE	-	TC1301BWNEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWNF	-	TC1301BWNFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.0V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWO	-	TC1302BWOVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWOA	-	TC1301BWOAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWOB	-	TC1301BWOBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWOC	-	TC1301BWOCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWOD	-	TC1301BWODVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWOE	-	TC1301BWOEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWOF	-	TC1301BWOFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.9V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWP	-	TC1302BWPVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWPA	-	TC1301BWPAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BWPB	-	TC1301BWPBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWPC	-	TC1301BWPCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWPD	-	TC1301BWPDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWPE	-	TC1301BWPEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWPF	-	TC1301BWPFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.8V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWQ	-	TC1302BWQVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWQA	-	TC1301BWQAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWQB	-	TC1301BWQBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWQC	-	TC1301BWQCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWQD	-	TC1301BWQDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWQE	-	TC1301BWQEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWQF	-	TC1301BWQFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.7V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWR	-	TC1302BWRVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWRA	-	TC1301BWRAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWRB	-	TC1301BWRBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWRC	-	TC1301BWRCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWRD	-	TC1301BWRDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWRE	-	TC1301BWREVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWRF	-	TC1301BWRFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.6V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWS	-	TC1302BWSVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWSA	-	TC1301BWSAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWSB	-	TC1301BWSBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWSC	-	TC1301BWSCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWSD	-	TC1301BWSDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWSE	-	TC1301BWSEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWSF	-	TC1301BWSFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.5V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWT	-	TC1302BWTVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWTA	-	TC1301BWTAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWTB	-	TC1301BWTBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWTC	-	TC1301BWTCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWTD	-	TC1301BWTDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWTE	-	TC1301BWTEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWTF	-	TC1301BWTFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWU	-	TC1302BWUVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWUA	-	TC1301BWUAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWUB	-	TC1301BWUBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWUC	-	TC1301BWUCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWUD	-	TC1301BWUDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWUE	-	TC1301BWUEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWUF	-	TC1301BWUFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWV	-	TC1302BWVVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWVA	-	TC1301BWVAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWVB	-	TC1301BWVBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWVC	-	TC1301BWVCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWVD	-	TC1301BWVDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWVE	-	TC1301BWVEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWVF	-	TC1301BWVFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/2.65V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWW	-	TC1302BWWVMF	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, +CE	DFN-8	75u4	VR29	9w	Mcc
BWWA	-	TC1301BWWAVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.63V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWWB	-	TC1301BWWBVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.2V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWWC	-	TC1301BWWCVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.32V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWWD	-	TC1301BWWDVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.5V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWWE	-	TC1301BWWEVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=1.85V(300mA)/1.85V(150mA)±2.5%, Vdet=2.4V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BWWF	-	TC1301BWWFVMF	LVR/Vdet-IC	LDO, Vo1/Vo2=2.1V(300mA)/1.85V(150mA)±2.5%, Vdet=2.6V±2.5%, +CE	DFN-8	75u2	VR28	9w	Mcc
BX	-	RP104K211C	LVR-IC	LDO, 2.1V±0.8%, 150mA	DFN1010-4	48y1	VR1	9a	Ric
BX	-	XC6221B2817R	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BX	-	XC6223D37B9R-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BX	-	XC9244A3FC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BX0	-	XC9261B20DER-G	DC-DC-IC	PWM/PFM step-down, 2.0V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BX08	-	RP502L081B	DC-DC-IC	PWM step-down, 0.8V±24mV, 800mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX09	-	RP502L091B	DC-DC-IC	PWM step-down, 0.9V±24mV, 800mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX1	-	XC9261B21DER-G	DC-DC-IC	PWM/PFM step-down, 2.1V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BX10	-	RP502L101B	DC-DC-IC	PWM step-down, 1.0V±24mV, 800mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX11	-	RP502L111B	DC-DC-IC	PWM step-down, 1.1V±24mV, 800mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX12	-	RP502L121B	DC-DC-IC	PWM step-down, 1.2V±24mV, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX13	-	RP502L131B	DC-DC-IC	PWM step-down, 1.3V±24mV, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX14	-	RP502L141B	DC-DC-IC	PWM step-down, 1.4V±24mV, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX15	-	RP502L151B	DC-DC-IC	PWM step-down, 1.5V±24mV, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX16	-	RP502L161B	DC-DC-IC	PWM step-down, 1.6V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX17	-	RP502L171B	DC-DC-IC	PWM step-down, 1.7V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BX18	-	RP502L181B	DC-DC-IC	PWM step-down, 1.8V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX19	-	RP502L191B	DC-DC-IC	PWM step-down, 1.9V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX2	-	XC9261B22DER-G	DC-DC-IC	PWM/PFM step-down, 2.2V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BX20	-	RP502L201B	DC-DC-IC	PWM step-down, 2.0V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX21	-	RP502L211B	DC-DC-IC	PWM step-down, 2.1V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX22	-	RP502L221B	DC-DC-IC	PWM step-down, 2.2V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX23	-	RP502L231B	DC-DC-IC	PWM step-down, 2.3V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX24	-	RP502L241B	DC-DC-IC	PWM step-down, 2.4V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX25	-	RP502L251B	DC-DC-IC	PWM step-down, 2.5V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX26	-	RP502L261B	DC-DC-IC	PWM step-down, 2.6V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX27	-	RP502L271B	DC-DC-IC	PWM step-down, 2.7V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX28	-	RP502L281B	DC-DC-IC	PWM step-down, 2.8V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX29	-	RP502L291B	DC-DC-IC	PWM step-down, 2.9V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX3	-	XC9261B23DER-G	DC-DC-IC	PWM/PFM step-down, 2.3V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BX30	-	RP502L301B	DC-DC-IC	PWM step-down, 3.0V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX31	-	RP502L311B	DC-DC-IC	PWM step-down, 3.1V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX32	-	RP502L321B	DC-DC-IC	PWM step-down, 3.2V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX33	-	RP502L331B	DC-DC-IC	PWM step-down, 3.3V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX34	-	RP502L121B5	DC-DC-IC	PWM step-down, 1.25V±24mV, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BX4	-	XC9261B24DER-G	DC-DC-IC	PWM/PFM step-down, 2.4V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BX5	-	XC9261B25DER-G	DC-DC-IC	PWM/PFM step-down, 2.5V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BX6	-	XC9261B26DER-G	DC-DC-IC	PWM/PFM step-down, 2.6V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BX7	-	XC9261B27DER-G	DC-DC-IC	PWM/PFM step-down, 2.7V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BX8	-	XC9261B28DER-G	DC-DC-IC	PWM/PFM step-down, 2.8V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BX9	-	XC9261B29DER-G	DC-DC-IC	PWM/PFM step-down, 2.9V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BXA	-	XC9261B2ADER-G	DC-DC-IC	PWM/PFM step-down, 2.05V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BXB	-	XC9261B2BDER-G	DC-DC-IC	PWM/PFM step-down, 2.15V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BXC	-	XC9261B2CDER-G	DC-DC-IC	PWM/PFM step-down, 2.25V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BXD	-	XC9261B2DDER-G	DC-DC-IC	PWM/PFM step-down, 2.35V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BXE	-	XC9261B2EDER-G	DC-DC-IC	PWM/PFM step-down, 2.45V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BXF	-	XC9261B2FDER-G	DC-DC-IC	PWM/PFM step-down, 2.55V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BXH	-	XC9261B2HDER-G	DC-DC-IC	PWM/PFM step-down, 2.65V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BXK	-	XC9261B2KDER-G	DC-DC-IC	PWM/PFM step-down, 2.75V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BXL	-	XC9261B2LDER-G	DC-DC-IC	PWM/PFM step-down, 2.85V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BXM	-	XC9261B2MDER-G	DC-DC-IC	PWM/PFM step-down, 2.95V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BY	-	SiP21106DVP-33-E3	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	TSC75-6L	91ub	VR7	9m	Vs
BY	-	XC6221B2917R	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BY	-	XC6223D38B9R-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BY	-	XC9244A3HC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BY0	-	XC9261B30DER-G	DC-DC-IC	PWM/PFM step-down, 3.0V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BY08	-	RP502L082B	DC-DC-IC	PWM/VFM step-down, 0.8V±24mV, 800mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY09	-	RP502L092B	DC-DC-IC	PWM/VFM step-down, 0.9V±24mV, 800mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY1	-	XC9261B31DER-G	DC-DC-IC	PWM/PFM step-down, 3.1V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BY10	-	RP502L102B	DC-DC-IC	PWM/VFM step-down, 1.0V±24mV, 800mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY11	-	RP502L112B	DC-DC-IC	PWM/VFM step-down, 1.1V±24mV, 800mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY12	-	RP502L122B	DC-DC-IC	PWM/VFM step-down, 1.2V±24mV, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY13	-	RP502L132B	DC-DC-IC	PWM/VFM step-down, 1.3V±24mV, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY14	-	RP502L142B	DC-DC-IC	PWM/VFM step-down, 1.4V±24mV, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY15	-	RP502L152B	DC-DC-IC	PWM/VFM step-down, 1.5V±24mV, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY16	-	RP502L162B	DC-DC-IC	PWM/VFM step-down, 1.6V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY17	-	RP502L172B	DC-DC-IC	PWM/VFM step-down, 1.7V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY18	-	RP502L182B	DC-DC-IC	PWM/VFM step-down, 1.8V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY19	-	RP502L192B	DC-DC-IC	PWM/VFM step-down, 1.9V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY2	-	XC9261B32DER-G	DC-DC-IC	PWM/PFM step-down, 3.2V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BY20	-	RP502L202B	DC-DC-IC	PWM/VFM step-down, 2.0V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY21	-	RP502L212B	DC-DC-IC	PWM/VFM step-down, 2.1V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY22	-	RP502L222B	DC-DC-IC	PWM/VFM step-down, 2.2V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY23	-	RP502L232B	DC-DC-IC	PWM/VFM step-down, 2.3V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY24	-	RP502L242B	DC-DC-IC	PWM/VFM step-down, 2.4V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY25	-	RP502L252B	DC-DC-IC	PWM/VFM step-down, 2.5V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY26	-	RP502L262B	DC-DC-IC	PWM/VFM step-down, 2.6V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY27	-	RP502L272B	DC-DC-IC	PWM/VFM step-down, 2.7V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY28	-	RP502L282B	DC-DC-IC	PWM/VFM step-down, 2.8V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY29	-	RP502L292B	DC-DC-IC	PWM/VFM step-down, 2.9V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY3	-	XC9261B33DER-G	DC-DC-IC	PWM/PFM step-down, 3.3V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BY30	-	RP502L302B	DC-DC-IC	PWM/VFM step-down, 3.0V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY31	-	RP502L312B	DC-DC-IC	PWM/VFM step-down, 3.1V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY32	-	RP502L322B	DC-DC-IC	PWM/VFM step-down, 3.2V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY33	-	RP502L332B	DC-DC-IC	PWM/VFM step-down, 3.3V±1.5%, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric
BY34	-	RP502L122B5	DC-DC-IC	PWM/VFM step-down, 1.25V±24mV, 900mA, +CE	DFN1616-6	79ee	DC20	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
BY4	-	XC9261B34DER-G	DC-DC-IC	PWM/PFM step-down, 3.4V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BY5	-	XC9261B35DER-G	DC-DC-IC	PWM/PFM step-down, 3.5V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BY6	-	XC9261B36DER-G	DC-DC-IC	PWM/PFM step-down, 3.6V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BYA	-	XC9261B3ADER-G	DC-DC-IC	PWM/PFM step-down, 3.05V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BYB	-	XC9261B3BDER-G	DC-DC-IC	PWM/PFM step-down, 3.15V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BYC	-	XC9261B3CDER-G	DC-DC-IC	PWM/PFM step-down, 3.25V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BYD	-	XC9261B3DDER-G	DC-DC-IC	PWM/PFM step-down, 3.35V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BYE	-	XC9261B3EDER-G	DC-DC-IC	PWM/PFM step-down, 3.45V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BYF	-	XC9261B3FDER-G	DC-DC-IC	PWM/PFM step-down, 3.55V±2%, 1.5A, 3.0MHz, +CE, CL	USP-6C	49s3	DC1	9a	Tor
BZ	-	XC6221B3017R	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
BZ	-	XC6223D39B9R-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
BZ	-	XC9244A3KC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
BZ08	-	RP502L083B	DC-DC-IC	PWM step-down, 0.8V±24mV, 800mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ09	-	RP502L093B	DC-DC-IC	PWM step-down, 0.9V±24mV, 800mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ10	-	RP502L103B	DC-DC-IC	PWM step-down, 1.0V±24mV, 800mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ11	-	RP502L113B	DC-DC-IC	PWM step-down, 1.1V±24mV, 800mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ12	-	RP502L123B	DC-DC-IC	PWM step-down, 1.2V±24mV, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ13	-	RP502L133B	DC-DC-IC	PWM step-down, 1.3V±24mV, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ14	-	RP502L143B	DC-DC-IC	PWM step-down, 1.4V±24mV, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ15	-	RP502L153B	DC-DC-IC	PWM step-down, 1.5V±24mV, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ16	-	RP502L163B	DC-DC-IC	PWM step-down, 1.6V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ17	-	RP502L173B	DC-DC-IC	PWM step-down, 1.7V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ18	-	RP502L183B	DC-DC-IC	PWM step-down, 1.8V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ19	-	RP502L193B	DC-DC-IC	PWM step-down, 1.9V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ20	-	RP502L203B	DC-DC-IC	PWM step-down, 2.0V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ21	-	RP502L213B	DC-DC-IC	PWM step-down, 2.1V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ22	-	RP502L223B	DC-DC-IC	PWM step-down, 2.2V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ23	-	RP502L233B	DC-DC-IC	PWM step-down, 2.3V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ24	-	RP502L243B	DC-DC-IC	PWM step-down, 2.4V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ25	-	RP502L253B	DC-DC-IC	PWM step-down, 2.5V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ26	-	RP502L263B	DC-DC-IC	PWM step-down, 2.6V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ27	-	RP502L273B	DC-DC-IC	PWM step-down, 2.7V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ28	-	RP502L283B	DC-DC-IC	PWM step-down, 2.8V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ29	-	RP502L293B	DC-DC-IC	PWM step-down, 2.9V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ30	-	RP502L303B	DC-DC-IC	PWM step-down, 3.0V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ31	-	RP502L313B	DC-DC-IC	PWM step-down, 3.1V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ32	-	RP502L323B	DC-DC-IC	PWM step-down, 3.2V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ33	-	RP502L333B	DC-DC-IC	PWM step-down, 3.3V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
BZ34	-	RP502L123B5	DC-DC-IC	PWM step-down, 1.25V±24mV, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
c	-	CH3906T1PT	Si-pnp	AF, Sw, 40V, 200mA, B=100..300, 250MHz	FBPT-523	17ta	-	9a	Chm
C	-	CET3904E	Si-npn	DC/DC-Drv, 60V, 200mA, 250mW, B=100..150, 300MHz	SOT-883L	22ta	-	9m	Cen
c0	-	EUA2011H	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/3Ω), shutdown	BGA-9	39	AFP45	9a	Eut
C0	-	R3118K261A	Vdet-IC	2.6V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
C0	-	RP109L081B	LVR-IC	LDO, 0.8V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
C0	-	RT9193-1HPQV	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
C0	-	XC6GC2002HR	Vdet-IC	2.0V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
C00	-	74AHCT2G00GD	CMOS-Log	Dual 2-input NAND gates	SOT996-2	54	Log50	9z	Nxp
C001	-	R5323K001B	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=2.8V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C002	-	R5323K002B	LVR-IC	LDO, Dual out, V1=2.9V±1%, V2=2.9V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C003	-	R5323K003B	LVR-IC	LDO, Dual out, V1=3V±1%, V2=3V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C004	-	R5323K004B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=1.8V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C005	-	R5323K005B	LVR-IC	LDO, Dual out, V1=2.7V±1%, V2=2.7V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C006	-	R5323K006B	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=2.5V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C007	-	R5323K007B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=1.5V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C008	-	R5323K008B	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=4V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C009	-	R5323K009B	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=2.7V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C010	-	R5323K002A	LVR-IC	LDO, Dual out, V1=2.9V±1%, V2=2.9V±1%, 150mA, +CE	DFN1820-6	74rh	VR19	9b	Ric
C011	-	R5323K003A	LVR-IC	LDO, Dual out, V1=3V±1%, V2=3V±1%, 150mA, +CE	DFN1820-6	74rh	VR19	9b	Ric
C012	-	R5323K010B	LVR-IC	LDO, Dual out, V1=2.6V±1%, V2=2.6V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C013	-	R5323K013A	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=3.3V±1%, 150mA, +CE	DFN1820-6	74rh	VR19	9b	Ric
C014	-	R5323K014B	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=2.9V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C015	-	R5323K015B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=3.3V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C016	-	R5323K016B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=2.8V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C017	-	R5323K017B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=2.5V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C018	-	R5323K018B	LVR-IC	LDO, Dual out, V1=3.2V±1%, V2=3V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C019	-	R5323K019A	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=3V±1%, 150mA, +CE	DFN1820-6	74rh	VR19	9b	Ric
C020	-	R5323K019B	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=3V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C021	-	R5323K020A	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=2.9V±1%, 150mA, +CE	DFN1820-6	74rh	VR19	9b	Ric
C022	-	R5323K020B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=2.9V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C023	-	R5323K021B	LVR-IC	LDO, Dual out, V1=2.9V±1%, V2=1.8V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C024	-	R5323K022B	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=1.8V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C025	-	R5323K023A	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=3.3V±1%, 150mA, +CE	DFN1820-6	74rh	VR19	9b	Ric
C026	-	R5323K023B	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=3.3V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C027	-	R5323K024A	LVR-IC	LDO, Dual out, V1=3V±1%, V2=3.1V±1%, 150mA, +CE	DFN1820-6	74rh	VR19	9b	Ric
C028	-	R5323K013B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=3.3V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C029	-	R5323K027B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=2.5V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C03	-	XC61GC2002HR	Vdet-IC	2.0V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
C030	-	R5323K029B	LVR-IC	LDO, Dual out, V1=2.85V±1%, V2=2.85V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C031	-	R5323K012B	LVR-IC	LDO, Dual out, V1=3.3V±1%, V2=2.5V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C032	-	R5323K026B	LVR-IC	LDO, Dual out, V1=3.3V±1%, V2=1.9V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C033	-	R5323K030A	LVR-IC	LDO, Dual out, V1=2.7V±1%, V2=3V±1%, 150mA, +CE	DFN1820-6	74rh	VR19	9b	Ric
C034	-	R5323K030B	LVR-IC	LDO, Dual out, V1=2.7V±1%, V2=3V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C035	-	R5323K031B	LVR-IC	LDO, Dual out, V1=1.9V±1%, V2=2.8V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C036	-	R5323K032B	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=2.8V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C037	-	R5323K033B	LVR-IC	LDO, Dual out, V1=2.4V±1%, V2=3V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C038	-	R5323K034B	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=2.9V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C039	-	R5323K035B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=2.7V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C04	-	74AHCT3G04GD	CMOS-Log	Triple inverters	SOT996-2	54	Log56	9z	Nxp
C040	-	R5323K036B	LVR-IC	LDO, Dual out, V1=2.6V±1%, V2=2.9V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C041	-	R5323K011B	LVR-IC	LDO, Dual out, V1=3.3V±1%, V2=3V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C042	-	R5323K037B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=2.6V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C043	-	R5323K038B	LVR-IC	LDO, Dual out, V1=1.7V±1%, V2=2.8V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C044	-	R5323K039B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=3.1V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C045	-	R5323K040B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=3V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C046	-	R5323K041B	LVR-IC	LDO, Dual out, V1=2.7V±1%, V2=1.8V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C047	-	R5323K042B	LVR-IC	LDO, Dual out, V1=3.3V±1%, V2=3.3V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C048	-	R5323K024B	LVR-IC	LDO, Dual out, V1=3V±1%, V2=3.1V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C049	-	R5323K025B	LVR-IC	LDO, Dual out, V1=2.9V±1%, V2=3V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C050	-	R5323K028B	LVR-IC	LDO, Dual out, V1=3.1V±1%, V2=3.1V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C051	-	R5323K001A	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=2.8V±1%, 150mA, +CE	DFN1820-6	74rh	VR19	9b	Ric
C052	-	R5323K043B	LVR-IC	LDO, Dual out, V1=2.7V±1%, V2=2.85V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C053	-	R5323K044B	LVR-IC	LDO, Dual out, V1=2.6V±1%, V2=3.3V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C054	-	R5323K045B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=2.85V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C055	-	R5323K046B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=3.0V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C056	-	R5323K047B	LVR-IC	LDO, Dual out, V1=2.6V±1%, V2=2.8V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C057	-	R5323K011A	LVR-IC	LDO, Dual out, V1=3.3V±1%, V2=3.0V±1%, 150mA, +CE	DFN1820-6	74rh	VR19	9b	Ric
C058	-	R5323K048B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=2.6V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C059	-	R5323K049B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=1.8V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C060	-	R5323K050B	LVR-IC	LDO, Dual out, V1=2.1V±1%, V2=2.1V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C061	-	R5323K051B	LVR-IC	LDO, Dual out, V1=2.7V±1%, V2=2.8V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C062	-	R5323K052B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=3.1V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C063	-	R5323K053B	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=3.0V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C064	-	R5323K054A	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=2.85V±1%, 150mA, +CE	DFN1820-6	74rh	VR19	9b	Ric
C065	-	R5323K054B	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=2.85V±1%, 150mA, +CE, CL	DFN1820-6	74rh	VR19	9b	Ric
C08	-	74AHCT2G08GD	CMOS-Log	Dual 2-input AND gates	SOT996-2	54	Log51	9z	Nxp
C0A	-	XC6108C20AGR	Vdet-IC	2.0V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C0B	-	XC6108C20BGR	Vdet-IC	2.0V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C0C	-	XC6108C20CGR	Vdet-IC	2.0V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C0D	-	XC6108C20DGR	Vdet-IC	2.0V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C1	-	BZX884-B16	Z-diode	16V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
C1	-	R3118K271A	Vdet-IC	2.7V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
C1	-	RP109L091B	LVR-IC	LDO, 0.9V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
C1	-	RT9193-18PQV	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
C1	-	XC6GC2102HR	Vdet-IC	2.1V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
C13	-	XC61GC2102HR	Vdet-IC	2.1V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
C1A	-	XC6108C21AGR	Vdet-IC	2.1V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C1B	-	XC6108C21BGR	Vdet-IC	2.1V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C1C	-	XC6108C21CGR	Vdet-IC	2.1V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C1D	-	XC6108C21DGR	Vdet-IC	2.1V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C2	-	BZX884-B18	Z-diode	18V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
C2	-	LM4857ITL	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x1.2W(4Ω)+2x75+100mW(32Ω), I2C	BGA-30	39	-	9n	Nsc
C2	-	LM4859TL	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x1.2W(4Ω)+2x75mW(32Ω), I2C	BGA-30	39	-	9n	Nsc
C2	-	R3118K281A	Vdet-IC	2.8V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
C2	-	RP109L101B	LVR-IC	LDO, 1.0V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
C2	-	SN74LVC1G10YZP	CMOS-Log	3-input NAND gate	BGA-6	40	Log29	9v	Ti
C2	-	SN74LVC2G241YZP	CMOS-Log	Dual bus buffer non-inverted with 3-state output	BGA-8	50	Log60	9v	Ti
C2	-	XC6223E12B9R-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
C2	-	XC6GC2202HR	Vdet-IC	2.2V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
C23	-	XC61GC2202HR	Vdet-IC	2.2V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
C25	-	74AHCT2G125GD	CMOS-Log	Dual bus buffer with 3-state output	SOT996-2	54	Log54	9z	Nxp



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C26	-	74AHCT2G126GD	CMOS-Log	Dual bus buffer with 3-state output	SOT996-2	54	Log55	9z	Nxp
C2A	-	XC6108C22AGR	Vdet-IC	2.2V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C2B	-	XC6108C22BGR	Vdet-IC	2.2V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C2C	-	XC6108C22CGR	Vdet-IC	2.2V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C2D	-	XC6108C22DGR	Vdet-IC	2.2V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C3	-	BZX884-B20	Z-diode	20V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
C3	-	R3118K291A	Vdet-IC	2.9V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
C3	-	RP109L111B	LVR-IC	LDO, 1.1V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
C3	-	SN74LVC2G157YZP	CMOS-Log	2-input multiplexer	BGA-8	50	Log66	9v	Ti
C3	-	XC6223E13B9R-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
C3	-	XC6GC2302HR	Vdet-IC	2.3V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
C32	-	74AHCT2G32GD	CMOS-Log	Dual 2-input OR gates	SOT996-2	54	Log52	9z	Nxp
C33	-	XC61GC2302HR	Vdet-IC	2.3V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
C3A	-	XC6108C23AGR	Vdet-IC	2.3V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C3B	-	XC6108C23BGR	Vdet-IC	2.3V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C3C	-	XC6108C23CGR	Vdet-IC	2.3V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C3D	-	XC6108C23DGR	Vdet-IC	2.3V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C4	-	BZX884-B22	Z-diode	22V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
C4	-	R3118K301A	Vdet-IC	3.0V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
C4	-	RP109L121B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
C4	-	SN74LVC2G53YZP	CMOS-Log	2-channel analog multiplexer/demultiplexer	BGA-8	50	Log58	9v	Ti
C4	-	XC6223E14B9R-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
C4	-	XC6GC2402HR	Vdet-IC	2.4V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
C41	-	74AHCT2G241GD	CMOS-Log	Dual bus buffer non-inverted with 3-state output	SOT996-2	54	Log60	9z	Nxp
C43	-	XC61GC2402HR	Vdet-IC	2.4V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
C4A	-	XC6108C24AGR	Vdet-IC	2.4V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C4B	-	XC6108C24BGR	Vdet-IC	2.4V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C4C	-	XC6108C24CGR	Vdet-IC	2.4V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C4D	-	XC6108C24DGR	Vdet-IC	2.4V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C5	-	BZX884-B24	Z-diode	24V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
C5	-	R3118K311A	Vdet-IC	3.1V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
C5	-	RP109L131B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
C5	-	XC6223E15B9R-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
C5	-	XC6GC2502HR	Vdet-IC	2.5V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
C53	-	XC61GC2502HR	Vdet-IC	2.5V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
C5A	-	XC6108C25AGR	Vdet-IC	2.5V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C5B	-	XC6108C25BGR	Vdet-IC	2.5V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C5C	-	XC6108C25CGR	Vdet-IC	2.5V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C5D	-	XC6108C25DGR	Vdet-IC	2.5V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C6	-	BZX884-B27	Z-diode	27V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
C6	-	R3118K321A	Vdet-IC	3.2V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
C6	-	RP109L141B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
C6	-	SN74LVC2G66YZP	CMOS-Log	2-channel analog switch	BGA-8	50	Log68	9v	Ti
C6	-	XC6223E16B9R-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
C6	-	XC6GC2602HR	Vdet-IC	2.6V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
C63	-	XC61GC2602HR	Vdet-IC	2.6V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
C6A	-	XC6108C26AGR	Vdet-IC	2.6V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C6B	-	XC6108C26BGR	Vdet-IC	2.6V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C6C	-	XC6108C26CGR	Vdet-IC	2.6V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C6D	-	XC6108C26DGR	Vdet-IC	2.6V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C7	-	BZX884-B30	Z-diode	30V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
C7	-	R3118K331A	Vdet-IC	3.3V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
C7	-	RP109L151B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
C7	-	RT9193-28PQV	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
C7	-	SN74LVC2G17YZP	CMOS-Log	Dual Schmitt-trigger buffers	BGA-6	40	Log27	9v	Ti
C7	-	SN74LVC3G17YZP	CMOS-Log	Triple non-inverting Schmitt-trigger	BGA-8	50	Log71	9v	Ti
C7	-	XC6223E17B9R-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
C7	-	XC6GC2702HR	Vdet-IC	2.7V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
C73	-	XC61GC2702HR	Vdet-IC	2.7V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
C7A	-	XC6108C27AGR	Vdet-IC	2.7V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C7B	-	XC6108C27BGR	Vdet-IC	2.7V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C7C	-	XC6108C27CGR	Vdet-IC	2.7V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C7D	-	XC6108C27DGR	Vdet-IC	2.7V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C8	-	BZX884-B33	Z-diode	33V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
C8	-	R3118K341A	Vdet-IC	3.4V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
C8	-	RP109L161B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
C8	-	RT9193-30PQV	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
C8	-	XC6223E18B9R-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
C8	-	XC6GC2802HR	Vdet-IC	2.8V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
C83	-	XC61GC2802HR	Vdet-IC	2.8V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C8A	-	XC6108C28AGR	Vdet-IC	2.8V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C8B	-	XC6108C28BGR	Vdet-IC	2.8V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C8C	-	XC6108C28CGR	Vdet-IC	2.8V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C8D	-	XC6108C28DGR	Vdet-IC	2.8V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C9	-	BZX884-B36	Z-diode	36V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
C9	-	R3118K351A	Vdet-IC	3.5V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
C9	-	RP109L171B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
C9	-	RT9193-33PQV	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
C9	-	SN74LVC2G34YZP	CMOS-Log	Dual non-inverter buffers	BGA-6	40	Log23	9v	Ti
C9	-	SN74LVC3G34YZP	CMOS-Log	Triple non-inverter buffers	BGA-8	50	Log69	9v	Ti
C9	-	XC6223E19B9R-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
C9	-	XC6GC2902HR	Vdet-IC	2.9V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
C93	-	XC61GC2902HR	Vdet-IC	2.9V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
C9A	-	XC6108C29AGR	Vdet-IC	2.9V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C9B	-	XC6108C29BGR	Vdet-IC	2.9V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
C9C	-	XC6108C29CGR	Vdet-IC	2.9V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
C9D	-	XC6108C29DGR	Vdet-IC	2.9V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
CA	-	BZX884-B39	Z-diode	39V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
CA	-	R3134K10EA	Vdet-IC	1.0V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CA	-	RP104K121D	LVR-IC	LDO, 1.3V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CA	-	SN74LVC2G00YZP	CMOS-Log	Dual 2-input NAND gates	BGA-8	50	Log50	9v	Ti
CA	-	XC6223E20B9R-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CA	-	XC9244A38C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
CA08	-	RP502L084B	DC-DC-IC	PWM/VFM step-down, 0.8V±24mV, 800mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA09	-	RP502L094B	DC-DC-IC	PWM/VFM step-down, 0.9V±24mV, 800mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA10	-	RP502L104B	DC-DC-IC	PWM/VFM step-down, 1.0V±24mV, 800mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA11	-	RP502L114B	DC-DC-IC	PWM/VFM step-down, 1.1V±24mV, 800mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA116	-	XC6115A116ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA117	-	XC6115A117ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA118	-	XC6115A118ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA119	-	XC6115A119ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA12	-	RP502L124B	DC-DC-IC	PWM/VFM step-down, 1.2V±24mV, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA120	-	XC6115A120ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA121	-	XC6115A121ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA122	-	XC6115A122ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA123	-	XC6115A123ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA124	-	XC6115A124ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA125	-	XC6115A125ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA126	-	XC6115A126ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA127	-	XC6115A127ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA128	-	XC6115A128ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA129	-	XC6115A129ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA13	-	RP502L134B	DC-DC-IC	PWM/VFM step-down, 1.3V±24mV, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA130	-	XC6115A130ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA131	-	XC6115A131ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA132	-	XC6115A132ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA133	-	XC6115A133ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA134	-	XC6115A134ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA135	-	XC6115A135ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA136	-	XC6115A136ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA137	-	XC6115A137ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA138	-	XC6115A138ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA139	-	XC6115A139ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA14	-	RP502L144B	DC-DC-IC	PWM/VFM step-down, 1.4V±24mV, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA140	-	XC6115A140ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA141	-	XC6115A141ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA142	-	XC6115A142ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA143	-	XC6115A143ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA144	-	XC6115A144ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA145	-	XC6115A145ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA146	-	XC6115A146ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA147	-	XC6115A147ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA148	-	XC6115A148ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA149	-	XC6115A149ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA15	-	RP502L154B	DC-DC-IC	PWM/VFM step-down, 1.5V±24mV, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA150	-	XC6115A150ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=6.25ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA16	-	RP502L164B	DC-DC-IC	PWM/VFM step-down, 1.6V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA17	-	RP502L174B	DC-DC-IC	PWM/VFM step-down, 1.7V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA18	-	RP502L184B	DC-DC-IC	PWM/VFM step-down, 1.8V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA19	-	RP502L194B	DC-DC-IC	PWM/VFM step-down, 1.9V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CA20	-	RP502L204B	DC-DC-IC	PWM/VFM step-down, 2.0V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA21	-	RP502L214B	DC-DC-IC	PWM/VFM step-down, 2.1V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA216	-	XC6115A216ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA217	-	XC6115A217ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA218	-	XC6115A218ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA219	-	XC6115A219ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA22	-	RP502L224B	DC-DC-IC	PWM/VFM step-down, 2.2V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA220	-	XC6115A220ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA221	-	XC6115A221ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA222	-	XC6115A222ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA223	-	XC6115A223ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA224	-	XC6115A224ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA225	-	XC6115A225ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA226	-	XC6115A226ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA227	-	XC6115A227ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA228	-	XC6115A228ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA229	-	XC6115A229ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA23	-	RP502L234B	DC-DC-IC	PWM/VFM step-down, 2.3V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA230	-	XC6115A230ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA231	-	XC6115A231ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA232	-	XC6115A232ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA233	-	XC6115A233ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA234	-	XC6115A234ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA235	-	XC6115A235ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA236	-	XC6115A236ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA237	-	XC6115A237ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA238	-	XC6115A238ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA239	-	XC6115A239ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA24	-	RP502L244B	DC-DC-IC	PWM/VFM step-down, 2.4V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA240	-	XC6115A240ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA241	-	XC6115A241ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA242	-	XC6115A242ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA243	-	XC6115A243ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA244	-	XC6115A244ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA245	-	XC6115A245ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA246	-	XC6115A246ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA247	-	XC6115A247ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA248	-	XC6115A248ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA249	-	XC6115A249ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA25	-	RP502L254B	DC-DC-IC	PWM/VFM step-down, 2.5V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA250	-	XC6115A250ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA26	-	RP502L264B	DC-DC-IC	PWM/VFM step-down, 2.6V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA27	-	RP502L274B	DC-DC-IC	PWM/VFM step-down, 2.7V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA28	-	RP502L284B	DC-DC-IC	PWM/VFM step-down, 2.8V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA29	-	RP502L294B	DC-DC-IC	PWM/VFM step-down, 2.9V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA30	-	RP502L304B	DC-DC-IC	PWM/VFM step-down, 3.0V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA31	-	RP502L314B	DC-DC-IC	PWM/VFM step-down, 3.1V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA316	-	XC6115A316ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA317	-	XC6115A317ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA318	-	XC6115A318ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA319	-	XC6115A319ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA32	-	RP502L324B	DC-DC-IC	PWM/VFM step-down, 3.2V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA320	-	XC6115A320ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA321	-	XC6115A321ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA322	-	XC6115A322ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA323	-	XC6115A323ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA324	-	XC6115A324ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA325	-	XC6115A325ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA326	-	XC6115A326ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA327	-	XC6115A327ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA328	-	XC6115A328ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA329	-	XC6115A329ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA33	-	RP502L334B	DC-DC-IC	PWM/VFM step-down, 3.3V±1.5%, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA330	-	XC6115A330ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA331	-	XC6115A331ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA332	-	XC6115A332ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA333	-	XC6115A333ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA334	-	XC6115A334ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA335	-	XC6115A335ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA336	-	XC6115A336ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CA337	-	XC6115A337ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA338	-	XC6115A338ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA339	-	XC6115A339ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA34	-	RP502L124B5	DC-DC-IC	PWM/VFM step-down, 1.25V±24mV, 900mA, +CE, CL	DFN1616-6	79ee	DC20	9b	Ric
CA340	-	XC6115A340ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA341	-	XC6115A341ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA342	-	XC6115A342ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA343	-	XC6115A343ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA344	-	XC6115A344ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA345	-	XC6115A345ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA346	-	XC6115A346ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA347	-	XC6115A347ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA348	-	XC6115A348ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA349	-	XC6115A349ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA350	-	XC6115A350ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA416	-	XC6115A416ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA417	-	XC6115A417ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA418	-	XC6115A418ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA419	-	XC6115A419ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA420	-	XC6115A420ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA421	-	XC6115A421ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA422	-	XC6115A422ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA423	-	XC6115A423ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA424	-	XC6115A424ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA425	-	XC6115A425ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA426	-	XC6115A426ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA427	-	XC6115A427ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA428	-	XC6115A428ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA429	-	XC6115A429ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA430	-	XC6115A430ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA431	-	XC6115A431ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA432	-	XC6115A432ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA433	-	XC6115A433ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA434	-	XC6115A434ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA435	-	XC6115A435ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA436	-	XC6115A436ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA437	-	XC6115A437ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA438	-	XC6115A438ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA439	-	XC6115A439ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA440	-	XC6115A440ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA441	-	XC6115A441ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA442	-	XC6115A442ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA443	-	XC6115A443ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA444	-	XC6115A444ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA445	-	XC6115A445ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA446	-	XC6115A446ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA447	-	XC6115A447ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA448	-	XC6115A448ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA449	-	XC6115A449ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA450	-	XC6115A450ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA516	-	XC6115A516ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA517	-	XC6115A517ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA518	-	XC6115A518ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA519	-	XC6115A519ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA520	-	XC6115A520ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA521	-	XC6115A521ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA522	-	XC6115A522ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA523	-	XC6115A523ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA524	-	XC6115A524ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA525	-	XC6115A525ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA526	-	XC6115A526ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA527	-	XC6115A527ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA528	-	XC6115A528ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA529	-	XC6115A529ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA530	-	XC6115A530ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA531	-	XC6115A531ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA532	-	XC6115A532ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA533	-	XC6115A533ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA534	-	XC6115A534ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA535	-	XC6115A535ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CA536	-	XC6115A536ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA537	-	XC6115A537ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA538	-	XC6115A538ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA539	-	XC6115A539ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA540	-	XC6115A540ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA541	-	XC6115A541ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA542	-	XC6115A542ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA543	-	XC6115A543ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA544	-	XC6115A544ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA545	-	XC6115A545ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA546	-	XC6115A546ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA547	-	XC6115A547ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA548	-	XC6115A548ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA549	-	XC6115A549ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA550	-	XC6115A550ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA616	-	XC6115A616ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA617	-	XC6115A617ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA618	-	XC6115A618ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA619	-	XC6115A619ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA620	-	XC6115A620ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA621	-	XC6115A621ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA622	-	XC6115A622ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA623	-	XC6115A623ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA624	-	XC6115A624ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA625	-	XC6115A625ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA626	-	XC6115A626ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA627	-	XC6115A627ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA628	-	XC6115A628ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA629	-	XC6115A629ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA630	-	XC6115A630ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA631	-	XC6115A631ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA632	-	XC6115A632ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA633	-	XC6115A633ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA634	-	XC6115A634ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA635	-	XC6115A635ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA636	-	XC6115A636ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA637	-	XC6115A637ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA638	-	XC6115A638ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA639	-	XC6115A639ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA640	-	XC6115A640ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA641	-	XC6115A641ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA642	-	XC6115A642ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA643	-	XC6115A643ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA644	-	XC6115A644ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA645	-	XC6115A645ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA646	-	XC6115A646ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA647	-	XC6115A647ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA648	-	XC6115A648ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA649	-	XC6115A649ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA650	-	XC6115A650ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=3.13ms	USP-6C	49xq	VD20	9b	Tor
CA8	-	XC9235B08C0R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CA8	-	XC9235B08C4R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CA8	-	XC9235B08CER-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CA9	-	XC9235B09C0R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CA9	-	XC9235B09C4R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CA9	-	XC9235B09CER-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CAL	-	XC9235B0LC0R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CAL	-	XC9235B0LC4R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CAL	-	XC9235B0LCER-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CAM	-	XC9235B0MC0R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CAM	-	XC9235B0MC4R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CAM	-	XC9235B0MCER-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CB	-	BH15RB1WGUT	LVR-IC	LDO, 1.5V±1.0%, 150mA, +CE	BGA-4	63bg*	VR4	9a	Rhm
CB	-	BZX884-B43	Z-diode	43V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
CB	-	R3134K11EA	Vdet-IC	1.1V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CB	-	RP104K131D	LVR-IC	LDO, 1.3V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CB	-	SN74LVC2G02YZP	CMOS-Log	Dual 2-input NOR gates	BGA-8	50	Log53	9v	Ti
CB	-	XC6221B12B7R	LVR-IC	LDO, 1.25V±20mV, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CB	-	XC6223E21B9R-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CB	-	XC9244A39C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CB0	-	XC6213B3127R-G	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CB0	-	XC6213B312GR	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CB0	-	XC9235B10C0R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CB0	-	XC9235B10C4R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CB0	-	XC9235B10CER-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CB01	-	RP131L081B	LVR-IC	LDO, 0.8V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB02	-	RP131L091B	LVR-IC	LDO, 0.9V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB03	-	RP131L101B	LVR-IC	LDO, 1.0V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB04	-	RP131L111B	LVR-IC	LDO, 1.1V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB05	-	RP131L121B	LVR-IC	LDO, 1.2V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB06	-	RP131L121B5	LVR-IC	LDO, 1.25V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB07	-	RP131L131B	LVR-IC	LDO, 1.3V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB08	-	RP131L141B	LVR-IC	LDO, 1.4V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB09	-	RP131L151B	LVR-IC	LDO, 1.5V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB1	-	XC6213B3227R-G	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CB1	-	XC6213B322GR	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CB1	-	XC9235B11C0R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CB1	-	XC9235B11C4R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CB1	-	XC9235B11CER-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CB10	-	RP131L161B	LVR-IC	LDO, 1.6V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB11	-	RP131L171B	LVR-IC	LDO, 1.7V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB12	-	RP131L181B	LVR-IC	LDO, 1.8V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB13	-	RP131L181B5	LVR-IC	LDO, 1.85V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB14	-	RP131L191B	LVR-IC	LDO, 1.9V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB15	-	RP131L201B	LVR-IC	LDO, 2.0V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB16	-	RP131L211B	LVR-IC	LDO, 2.1V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB17	-	RP131L221B	LVR-IC	LDO, 2.2V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB18	-	RP131L231B	LVR-IC	LDO, 2.3V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB19	-	RP131L241B	LVR-IC	LDO, 2.4V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB2	-	XC6213B3327R-G	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CB2	-	XC6213B332GR	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CB2	-	XC9235B12C0R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CB2	-	XC9235B12C4R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CB2	-	XC9235B12CER-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CB20	-	RP131L251B	LVR-IC	LDO, 2.5V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB21	-	RP131L261B	LVR-IC	LDO, 2.6V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB216	-	XC6115B216ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB217	-	XC6115B217ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB218	-	XC6115B218ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB219	-	XC6115B219ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB22	-	RP131L271B	LVR-IC	LDO, 2.7V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB220	-	XC6115B220ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB221	-	XC6115B221ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB222	-	XC6115B222ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB223	-	XC6115B223ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB224	-	XC6115B224ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB225	-	XC6115B225ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB226	-	XC6115B226ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB227	-	XC6115B227ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB228	-	XC6115B228ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB229	-	XC6115B229ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB23	-	RP131L281B	LVR-IC	LDO, 2.8V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB230	-	XC6115B230ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB231	-	XC6115B231ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB232	-	XC6115B232ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB233	-	XC6115B233ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB234	-	XC6115B234ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB235	-	XC6115B235ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB236	-	XC6115B236ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB237	-	XC6115B237ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB238	-	XC6115B238ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB239	-	XC6115B239ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB24	-	RP131L281B5	LVR-IC	LDO, 2.85V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB240	-	XC6115B240ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB241	-	XC6115B241ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB242	-	XC6115B242ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB243	-	XC6115B243ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB244	-	XC6115B244ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB245	-	XC6115B245ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB246	-	XC6115B246ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CB247	-	XC6115B247ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB248	-	XC6115B248ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB249	-	XC6115B249ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB25	-	RP131L291B	LVR-IC	LDO, 2.9V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB250	-	XC6115B250ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB26	-	RP131L301B	LVR-IC	LDO, 3.0V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB27	-	RP131L311B	LVR-IC	LDO, 3.1V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB28	-	RP131L321B	LVR-IC	LDO, 3.2V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB29	-	RP131L331B	LVR-IC	LDO, 3.3V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB3	-	XC6213B3427R-G	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CB3	-	XC6213B342GR	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CB3	-	XC9235B13C0R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CB3	-	XC9235B13C4R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CB3	-	XC9235B13CER-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CB30	-	RP131L341B	LVR-IC	LDO, 3.4V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB31	-	RP131L351B	LVR-IC	LDO, 3.5V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB316	-	XC6115B316ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB317	-	XC6115B317ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB318	-	XC6115B318ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB319	-	XC6115B319ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB32	-	RP131L361B	LVR-IC	LDO, 3.6V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB320	-	XC6115B320ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB321	-	XC6115B321ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB322	-	XC6115B322ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB323	-	XC6115B323ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB324	-	XC6115B324ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB325	-	XC6115B325ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB326	-	XC6115B326ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB327	-	XC6115B327ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB328	-	XC6115B328ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB329	-	XC6115B329ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB33	-	RP131L371B	LVR-IC	LDO, 3.7V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB330	-	XC6115B330ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB331	-	XC6115B331ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB332	-	XC6115B332ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB333	-	XC6115B333ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB334	-	XC6115B334ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB335	-	XC6115B335ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB336	-	XC6115B336ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB337	-	XC6115B337ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB338	-	XC6115B338ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB339	-	XC6115B339ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB34	-	RP131L381B	LVR-IC	LDO, 3.8V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB340	-	XC6115B340ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB341	-	XC6115B341ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB342	-	XC6115B342ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB343	-	XC6115B343ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB344	-	XC6115B344ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB345	-	XC6115B345ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB346	-	XC6115B346ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB347	-	XC6115B347ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB348	-	XC6115B348ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB349	-	XC6115B349ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB35	-	RP131L391B	LVR-IC	LDO, 3.9V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB350	-	XC6115B350ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB36	-	RP131L401B	LVR-IC	LDO, 4.0V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB37	-	RP131L411B	LVR-IC	LDO, 4.1V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB38	-	RP131L421B	LVR-IC	LDO, 4.2V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB39	-	RP131L431B	LVR-IC	LDO, 4.3V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB4	-	XC6213B3527R-G	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CB4	-	XC6213B352GR	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CB4	-	XC9235B14C0R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CB4	-	XC9235B14C4R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CB4	-	XC9235B14CER-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CB40	-	RP131L441B	LVR-IC	LDO, 4.4V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB41	-	RP131L451B	LVR-IC	LDO, 4.5V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB416	-	XC6115B416ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB417	-	XC6115B417ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB418	-	XC6115B418ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB419	-	XC6115B419ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CB42	-	RP131L461B	LVR-IC	LDO, 4.6V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB420	-	XC6115B420ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB421	-	XC6115B421ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB422	-	XC6115B422ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB423	-	XC6115B423ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB424	-	XC6115B424ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB425	-	XC6115B425ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB426	-	XC6115B426ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB427	-	XC6115B427ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB428	-	XC6115B428ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB429	-	XC6115B429ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB43	-	RP131L471B	LVR-IC	LDO, 4.7V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB430	-	XC6115B430ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB431	-	XC6115B431ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB432	-	XC6115B432ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB433	-	XC6115B433ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB434	-	XC6115B434ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB435	-	XC6115B435ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB436	-	XC6115B436ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB437	-	XC6115B437ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB438	-	XC6115B438ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB439	-	XC6115B439ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB44	-	RP131L481B	LVR-IC	LDO, 4.8V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB440	-	XC6115B440ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB441	-	XC6115B441ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB442	-	XC6115B442ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB443	-	XC6115B443ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB444	-	XC6115B444ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB445	-	XC6115B445ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB446	-	XC6115B446ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB447	-	XC6115B447ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB448	-	XC6115B448ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB449	-	XC6115B449ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB45	-	RP131L491B	LVR-IC	LDO, 4.9V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB450	-	XC6115B450ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB46	-	RP131L501B	LVR-IC	LDO, 5.0V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB47	-	RP131L101B5	LVR-IC	LDO, 1.05V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB48	-	RP131L511B	LVR-IC	LDO, 5.1V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB49	-	RP131L521B	LVR-IC	LDO, 5.2V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB5	-	XC6213B3627R-G	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CB5	-	XC6213B362GR	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CB5	-	XC9235B15C0R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CB5	-	XC9235B15C4R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CB5	-	XC9235B15CER-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CB50	-	RP131L531B	LVR-IC	LDO, 5.3V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB51	-	RP131L541B	LVR-IC	LDO, 5.4V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB516	-	XC6115B516ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB517	-	XC6115B517ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB518	-	XC6115B518ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB519	-	XC6115B519ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB52	-	RP131L551B	LVR-IC	LDO, 5.5V±1%, 1A, +CE	DFN1616-6B	79wf	VR4	9b	Ric
CB520	-	XC6115B520ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB521	-	XC6115B521ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB522	-	XC6115B522ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB523	-	XC6115B523ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB524	-	XC6115B524ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB525	-	XC6115B525ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB526	-	XC6115B526ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB527	-	XC6115B527ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB528	-	XC6115B528ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB529	-	XC6115B529ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB530	-	XC6115B530ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB531	-	XC6115B531ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB532	-	XC6115B532ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB533	-	XC6115B533ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB534	-	XC6115B534ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB535	-	XC6115B535ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB536	-	XC6115B536ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB537	-	XC6115B537ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB538	-	XC6115B538ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CB539	-	XC6115B539ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB540	-	XC6115B540ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB541	-	XC6115B541ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB542	-	XC6115B542ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB543	-	XC6115B543ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB544	-	XC6115B544ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB545	-	XC6115B545ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB546	-	XC6115B546ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB547	-	XC6115B547ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB548	-	XC6115B548ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB549	-	XC6115B549ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB550	-	XC6115B550ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB6	-	XC6213B3727R-G	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CB6	-	XC6213B372GR	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CB6	-	XC9235B16C0R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CB6	-	XC9235B16C4R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CB6	-	XC9235B16CER-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CB616	-	XC6115B616ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB617	-	XC6115B617ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB618	-	XC6115B618ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB619	-	XC6115B619ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB620	-	XC6115B620ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB621	-	XC6115B621ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB622	-	XC6115B622ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB623	-	XC6115B623ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB624	-	XC6115B624ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB625	-	XC6115B625ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB626	-	XC6115B626ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB627	-	XC6115B627ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB628	-	XC6115B628ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB629	-	XC6115B629ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB630	-	XC6115B630ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB631	-	XC6115B631ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB632	-	XC6115B632ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB633	-	XC6115B633ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB634	-	XC6115B634ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB635	-	XC6115B635ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB636	-	XC6115B636ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB637	-	XC6115B637ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB638	-	XC6115B638ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB639	-	XC6115B639ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB640	-	XC6115B640ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB641	-	XC6115B641ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB642	-	XC6115B642ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB643	-	XC6115B643ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB644	-	XC6115B644ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB645	-	XC6115B645ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB646	-	XC6115B646ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB647	-	XC6115B647ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB648	-	XC6115B648ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB649	-	XC6115B649ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB650	-	XC6115B650ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=25ms	USP-6C	49xq	VD20	9b	Tor
CB7	-	XC6213B3827R-G	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CB7	-	XC6213B382GR	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CB7	-	XC9235B17C0R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CB7	-	XC9235B17C4R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CB7	-	XC9235B17CER-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CB8	-	XC6213B3927R-G	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CB8	-	XC6213B392GR	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CB8	-	XC9235B18C0R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CB8	-	XC9235B18C4R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CB8	-	XC9235B18CER-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CB9	-	XC6213B4027R-G	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CB9	-	XC6213B402GR	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CB9	-	XC9235B19C0R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CB9	-	XC9235B19C4R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CB9	-	XC9235B19CER-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CBA	-	XC6213B4127R-G	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CBA	-	XC6213B412GR	LVR-IC	LDO, 4.1V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CBA	-	XC9235B1AC0R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CBA	-	XC9235B1AC4R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CBA	-	XC9235B1ACER-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CBB	-	XC6213B4227R-G	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CBB	-	XC6213B422GR	LVR-IC	LDO, 4.2V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CBB	-	XC9235B1BC0R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CBB	-	XC9235B1BC4R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CBB	-	XC9235B1BCER-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CBC	-	XC6213B4327R-G	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CBC	-	XC6213B432GR	LVR-IC	LDO, 4.3V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CBC	-	XC9235B1CC0R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CBC	-	XC9235B1CC4R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CBC	-	XC9235B1CCER-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CBD	-	XC6213B4427R-G	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CBD	-	XC6213B442GR	LVR-IC	LDO, 4.4V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CBD	-	XC9235B1DC0R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CBD	-	XC9235B1DC4R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CBD	-	XC9235B1DCER-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CBE	-	XC6213B4527R-G	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CBE	-	XC6213B452GR	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CBE	-	XC9235B1EC0R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CBE	-	XC9235B1EC4R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CBE	-	XC9235B1ECER-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CBF	-	XC6213B4627R-G	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CBF	-	XC6213B462GR	LVR-IC	LDO, 4.6V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CBF	-	XC9235B1FC0R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CBF	-	XC9235B1FC4R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CBF	-	XC9235B1FCER-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CBH	-	XC6213B4727R-G	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CBH	-	XC6213B472GR	LVR-IC	LDO, 4.7V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CBH	-	XC9235B1HC0R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CBH	-	XC9235B1HC4R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CBH	-	XC9235B1HCER-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CBK	-	XC6213B4827R-G	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CBK	-	XC6213B482GR	LVR-IC	LDO, 4.8V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CBK	-	XC9235B1KC0R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CBK	-	XC9235B1KC4R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CBK	-	XC9235B1KCER-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CBL	-	XC6213B4927R-G	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CBL	-	XC6213B492GR	LVR-IC	LDO, 4.9V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CBL	-	XC9235B1LC0R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CBL	-	XC9235B1LC4R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CBL	-	XC9235B1LCER-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CBM	-	XC6213B5027R-G	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CBM	-	XC6213B502GR	LVR-IC	LDO, 5.0V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CBM	-	XC9235B1MC0R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CBM	-	XC9235B1MC4R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CBM	-	XC9235B1MCER-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CC	-	BH18RB1WGUT	LVR-IC	LDO, 1.8V±1.0%, 150mA, +CE	BGA-4	63bg*	VR4	9a	Rhm
CC	-	BZX884-B47	Z-diode	47V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
CC	-	R3134K12EA	Vdet-IC	1.2V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CC	-	RP104K151D	LVR-IC	LDO, 1.5V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CC	-	SN74LVC2G04YZP	CMOS-Log	Dual inverters	BGA-6	40	Log24	9v	Ti
CC	-	SN74LVC3G04YZP	CMOS-Log	Triple inverters	BGA-8	50	Log56	9v	Ti
CC	-	XC6221B13B7R	LVR-IC	LDO, 1.35V±20mV, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CC	-	XC6223E22B9R-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CC	-	XC9244A40C7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
CC0	-	XC9235B20C0R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CC0	-	XC9235B20C4R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CC0	-	XC9235B20CER-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CC01	-	RP131L081D	LVR-IC	LDO, 0.8V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC02	-	RP131L091D	LVR-IC	LDO, 0.9V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC03	-	RP131L101D	LVR-IC	LDO, 1.0V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC04	-	RP131L111D	LVR-IC	LDO, 1.1V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC05	-	RP131L121D	LVR-IC	LDO, 1.2V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC06	-	RP131L121D5	LVR-IC	LDO, 1.25V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC07	-	RP131L131D	LVR-IC	LDO, 1.3V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC08	-	RP131L141D	LVR-IC	LDO, 1.4V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC09	-	RP131L151D	LVR-IC	LDO, 1.5V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC1	-	XC9235B21C0R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CC1	-	XC9235B21C4R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CC1	-	XC9235B21CER-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CC10	-	RP131L161D	LVR-IC	LDO, 1.6V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC11	-	RP131L171D	LVR-IC	LDO, 1.7V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC12	-	RP131L181D	LVR-IC	LDO, 1.8V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC13	-	RP131L181D5	LVR-IC	LDO, 1.85V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC14	-	RP131L191D	LVR-IC	LDO, 1.9V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC15	-	RP131L201D	LVR-IC	LDO, 2.0V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC16	-	RP131L211D	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC17	-	RP131L221D	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC18	-	RP131L231D	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC19	-	RP131L241D	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC2	-	XC9235B22C0R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CC2	-	XC9235B22C4R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CC2	-	XC9235B22CER-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CC20	-	RP131L251D	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC21	-	RP131L261D	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC216	-	XC6115C216ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC217	-	XC6115C217ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC218	-	XC6115C218ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC219	-	XC6115C219ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC22	-	RP131L271D	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC220	-	XC6115C220ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC221	-	XC6115C221ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC222	-	XC6115C222ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC223	-	XC6115C223ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC224	-	XC6115C224ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC225	-	XC6115C225ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC226	-	XC6115C226ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC227	-	XC6115C227ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC228	-	XC6115C228ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC229	-	XC6115C229ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC23	-	RP131L281D	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC230	-	XC6115C230ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC231	-	XC6115C231ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC232	-	XC6115C232ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC233	-	XC6115C233ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC234	-	XC6115C234ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC235	-	XC6115C235ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC236	-	XC6115C236ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC237	-	XC6115C237ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC238	-	XC6115C238ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC239	-	XC6115C239ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC24	-	RP131L281D5	LVR-IC	LDO, 2.85V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC240	-	XC6115C240ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC241	-	XC6115C241ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC242	-	XC6115C242ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC243	-	XC6115C243ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC244	-	XC6115C244ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC245	-	XC6115C245ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC246	-	XC6115C246ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC247	-	XC6115C247ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC248	-	XC6115C248ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC249	-	XC6115C249ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC25	-	RP131L291D	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC250	-	XC6115C250ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=50ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC26	-	RP131L301D	LVR-IC	LDO, 3.0V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC27	-	RP131L311D	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC28	-	RP131L321D	LVR-IC	LDO, 3.2V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC29	-	RP131L331D	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC3	-	XC9235B23C0R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CC3	-	XC9235B23C4R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CC3	-	XC9235B23CER-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CC30	-	RP131L341D	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC31	-	RP131L351D	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC316	-	XC6115C316ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC317	-	XC6115C317ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC318	-	XC6115C318ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC319	-	XC6115C319ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC32	-	RP131L361D	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC320	-	XC6115C320ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CC321	-	XC6115C321ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC322	-	XC6115C322ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC323	-	XC6115C323ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC324	-	XC6115C324ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC325	-	XC6115C325ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC326	-	XC6115C326ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC327	-	XC6115C327ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC328	-	XC6115C328ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC329	-	XC6115C329ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC33	-	RP131L371D	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC330	-	XC6115C330ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC331	-	XC6115C331ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC332	-	XC6115C332ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC333	-	XC6115C333ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC334	-	XC6115C334ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC335	-	XC6115C335ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC336	-	XC6115C336ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC337	-	XC6115C337ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC338	-	XC6115C338ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC339	-	XC6115C339ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC34	-	RP131L381D	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC340	-	XC6115C340ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC341	-	XC6115C341ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC342	-	XC6115C342ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC343	-	XC6115C343ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC344	-	XC6115C344ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC345	-	XC6115C345ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC346	-	XC6115C346ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC347	-	XC6115C347ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC348	-	XC6115C348ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC349	-	XC6115C349ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC35	-	RP131L391D	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC350	-	XC6115C350ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC36	-	RP131L401D	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC37	-	RP131L411D	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC38	-	RP131L421D	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC39	-	RP131L431D	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC4	-	XC9235B24C0R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CC4	-	XC9235B24C4R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CC4	-	XC9235B24CER-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CC40	-	RP131L441D	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC41	-	RP131L451D	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC416	-	XC6115C416ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC417	-	XC6115C417ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC418	-	XC6115C418ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC419	-	XC6115C419ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC42	-	RP131L461D	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC420	-	XC6115C420ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC421	-	XC6115C421ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC422	-	XC6115C422ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC423	-	XC6115C423ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC424	-	XC6115C424ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC425	-	XC6115C425ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC426	-	XC6115C426ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC427	-	XC6115C427ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC428	-	XC6115C428ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC429	-	XC6115C429ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC43	-	RP131L471D	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC430	-	XC6115C430ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC431	-	XC6115C431ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC432	-	XC6115C432ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC433	-	XC6115C433ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC434	-	XC6115C434ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC435	-	XC6115C435ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC436	-	XC6115C436ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC437	-	XC6115C437ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC438	-	XC6115C438ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC439	-	XC6115C439ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC44	-	RP131L481D	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC440	-	XC6115C440ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CC441	-	XC6115C441ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC442	-	XC6115C442ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC443	-	XC6115C443ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC444	-	XC6115C444ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC445	-	XC6115C445ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC446	-	XC6115C446ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC447	-	XC6115C447ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC448	-	XC6115C448ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC449	-	XC6115C449ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC45	-	RP131L491D	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC450	-	XC6115C450ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC46	-	RP131L501D	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC47	-	RP131L101D5	LVR-IC	LDO, 1.05V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC48	-	RP131L511D	LVR-IC	LDO, 5.1V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC49	-	RP131L521D	LVR-IC	LDO, 5.2V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC5	-	XC9235B25C0R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CC5	-	XC9235B25C4R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CC5	-	XC9235B25CER-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CC50	-	RP131L531D	LVR-IC	LDO, 5.3V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC51	-	RP131L541D	LVR-IC	LDO, 5.4V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC516	-	XC6115C516ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC517	-	XC6115C517ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC518	-	XC6115C518ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC519	-	XC6115C519ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC52	-	RP131L551D	LVR-IC	LDO, 5.5V±1%, 1A, +CE, CL	DFN1616-6B	79wf	VR4	9b	Ric
CC520	-	XC6115C520ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC521	-	XC6115C521ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC522	-	XC6115C522ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC523	-	XC6115C523ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC524	-	XC6115C524ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC525	-	XC6115C525ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC526	-	XC6115C526ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC527	-	XC6115C527ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC528	-	XC6115C528ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC529	-	XC6115C529ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC530	-	XC6115C530ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC531	-	XC6115C531ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC532	-	XC6115C532ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC533	-	XC6115C533ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC534	-	XC6115C534ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC535	-	XC6115C535ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC536	-	XC6115C536ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC537	-	XC6115C537ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC538	-	XC6115C538ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC539	-	XC6115C539ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC540	-	XC6115C540ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC541	-	XC6115C541ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC542	-	XC6115C542ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC543	-	XC6115C543ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC544	-	XC6115C544ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC545	-	XC6115C545ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC546	-	XC6115C546ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC547	-	XC6115C547ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC548	-	XC6115C548ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC549	-	XC6115C549ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC550	-	XC6115C550ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC6	-	XC9235B26C0R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CC6	-	XC9235B26C4R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CC6	-	XC9235B26CER-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CC616	-	XC6115C616ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC617	-	XC6115C617ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC618	-	XC6115C618ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC619	-	XC6115C619ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC620	-	XC6115C620ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC621	-	XC6115C621ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC622	-	XC6115C622ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC623	-	XC6115C623ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC624	-	XC6115C624ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC625	-	XC6115C625ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC626	-	XC6115C626ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CC627	-	XC6115C627ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC628	-	XC6115C628ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC629	-	XC6115C629ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC630	-	XC6115C630ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC631	-	XC6115C631ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC632	-	XC6115C632ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC633	-	XC6115C633ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC634	-	XC6115C634ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC635	-	XC6115C635ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC636	-	XC6115C636ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC637	-	XC6115C637ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC638	-	XC6115C638ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC639	-	XC6115C639ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC640	-	XC6115C640ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC641	-	XC6115C641ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC642	-	XC6115C642ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC643	-	XC6115C643ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC644	-	XC6115C644ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC645	-	XC6115C645ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC646	-	XC6115C646ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC647	-	XC6115C647ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC648	-	XC6115C648ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC649	-	XC6115C649ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC650	-	XC6115C650ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=50ms	USP-6C	49xq	VD20	9b	Tor
CC7	-	XC9235B27C0R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CC7	-	XC9235B27C4R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CC7	-	XC9235B27CER-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CC8	-	XC9235B28C0R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CC8	-	XC9235B28C4R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CC8	-	XC9235B28CER-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CC9	-	XC9235B29C0R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CC9	-	XC9235B29C4R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CC9	-	XC9235B29CER-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CCA	-	XC9235B2AC0R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CCA	-	XC9235B2AC4R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CCA	-	XC9235B2ACER-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CCB	-	XC9235B2BC0R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CCB	-	XC9235B2BC4R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CCB	-	XC9235B2BCER-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CCC	-	XC9235B2CC0R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CCC	-	XC9235B2CC4R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CCC	-	XC9235B2CCER-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CCD	-	XC9235B2DC0R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CCD	-	XC9235B2DC4R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CCD	-	XC9235B2DCER-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CCE	-	XC9235B2EC0R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CCE	-	XC9235B2EC4R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CCE	-	XC9235B2ECER-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CCF	-	XC9235B2FC0R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CCF	-	XC9235B2FC4R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CCF	-	XC9235B2FCER-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CCH	-	XC9235B2HC0R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CCH	-	XC9235B2HC4R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CCH	-	XC9235B2HCER-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CCJ	-	TPA2016D2YZH	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x1.7W(5V/4Ω), shutdown	BGA-16	39	-	9a	Ti
CCK	-	XC9235B2KC0R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CCK	-	XC9235B2KC4R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CCK	-	XC9235B2KCER-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CCL	-	XC9235B2LC0R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CCL	-	XC9235B2LC4R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CCL	-	XC9235B2LCER-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CCM	-	XC9235B2MC0R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CCM	-	XC9235B2MC4R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CCM	-	XC9235B2MCER-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CD	-	BH25RB1WGUT	LVR-IC	LDO, 2.5V±1.0%, 150mA, +CE	BGA-4	63bg*	VR4	9a	Rhm
CD	-	BZX884-B51	Z-diode	51V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
CD	-	R3134K13EA	Vdet-IC	1.3V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CD	-	RP104K181D	LVR-IC	LDO, 1.8V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CD	-	SN74LVC2GU04YZP	CMOS-Log	Dual inverters	BGA-6	40	Log24	9v	Ti
CD	-	SN74LVC3GU04YZP	CMOS-Log	Triple inverters	BGA-8	50	Log56	9v	Ti

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CD	-	XC6221B14B7R	LVR-IC	LDO, 1.45V±20mV, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CD	-	XC6223E23B9R-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CD	-	XC9244A3LC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
CD0	-	XC9235B30C0R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CD0	-	XC9235B30C4R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CD0	-	XC9235B30CER-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CD1	-	XC9235B31C0R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CD1	-	XC9235B31C4R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CD1	-	XC9235B31CER-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CD2	-	XC9235B32C0R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CD2	-	XC9235B32C4R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CD2	-	XC9235B32CER-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CD3	-	XC9235B33C0R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CD3	-	XC9235B33C4R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CD3	-	XC9235B33CER-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CD316	-	XC6115D316ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD317	-	XC6115D317ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD318	-	XC6115D318ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD319	-	XC6115D319ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD320	-	XC6115D320ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD321	-	XC6115D321ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD322	-	XC6115D322ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD323	-	XC6115D323ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD324	-	XC6115D324ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD325	-	XC6115D325ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD326	-	XC6115D326ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD327	-	XC6115D327ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD328	-	XC6115D328ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD329	-	XC6115D329ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD330	-	XC6115D330ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD331	-	XC6115D331ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD332	-	XC6115D332ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD333	-	XC6115D333ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD334	-	XC6115D334ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD335	-	XC6115D335ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD336	-	XC6115D336ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD337	-	XC6115D337ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD338	-	XC6115D338ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD339	-	XC6115D339ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD340	-	XC6115D340ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD341	-	XC6115D341ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD342	-	XC6115D342ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD343	-	XC6115D343ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD344	-	XC6115D344ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD345	-	XC6115D345ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD346	-	XC6115D346ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD347	-	XC6115D347ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD348	-	XC6115D348ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD349	-	XC6115D349ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD350	-	XC6115D350ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=100ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD4	-	XC9235B34C0R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CD4	-	XC9235B34C4R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CD4	-	XC9235B34CER-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CD416	-	XC6115D416ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD417	-	XC6115D417ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD418	-	XC6115D418ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD419	-	XC6115D419ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD420	-	XC6115D420ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD421	-	XC6115D421ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD422	-	XC6115D422ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD423	-	XC6115D423ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD424	-	XC6115D424ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD425	-	XC6115D425ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD426	-	XC6115D426ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD427	-	XC6115D427ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD428	-	XC6115D428ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD429	-	XC6115D429ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD430	-	XC6115D430ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD431	-	XC6115D431ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD432	-	XC6115D432ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CD433	-	XC6115D433ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD434	-	XC6115D434ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD435	-	XC6115D435ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD436	-	XC6115D436ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD437	-	XC6115D437ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD438	-	XC6115D438ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD439	-	XC6115D439ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD440	-	XC6115D440ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD441	-	XC6115D441ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD442	-	XC6115D442ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD443	-	XC6115D443ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD444	-	XC6115D444ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD445	-	XC6115D445ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD446	-	XC6115D446ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD447	-	XC6115D447ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD448	-	XC6115D448ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD449	-	XC6115D449ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD450	-	XC6115D450ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD5	-	XC9235B35C0R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CD5	-	XC9235B35C4R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CD5	-	XC9235B35CER-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CD516	-	XC6115D516ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD517	-	XC6115D517ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD518	-	XC6115D518ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD519	-	XC6115D519ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD520	-	XC6115D520ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD521	-	XC6115D521ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD522	-	XC6115D522ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD523	-	XC6115D523ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD524	-	XC6115D524ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD525	-	XC6115D525ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD526	-	XC6115D526ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD527	-	XC6115D527ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD528	-	XC6115D528ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD529	-	XC6115D529ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD530	-	XC6115D530ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD531	-	XC6115D531ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD532	-	XC6115D532ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD533	-	XC6115D533ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD534	-	XC6115D534ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD535	-	XC6115D535ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD536	-	XC6115D536ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD537	-	XC6115D537ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD538	-	XC6115D538ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD539	-	XC6115D539ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD540	-	XC6115D540ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD541	-	XC6115D541ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD542	-	XC6115D542ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD543	-	XC6115D543ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD544	-	XC6115D544ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD545	-	XC6115D545ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD546	-	XC6115D546ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD547	-	XC6115D547ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD548	-	XC6115D548ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD549	-	XC6115D549ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD550	-	XC6115D550ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD6	-	XC9235B36C0R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CD6	-	XC9235B36C4R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CD6	-	XC9235B36CER-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CD616	-	XC6115D616ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD617	-	XC6115D617ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD618	-	XC6115D618ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD619	-	XC6115D619ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD620	-	XC6115D620ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD621	-	XC6115D621ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD622	-	XC6115D622ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD623	-	XC6115D623ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD624	-	XC6115D624ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD625	-	XC6115D625ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD626	-	XC6115D626ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CD627	-	XC6115D627ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD628	-	XC6115D628ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD629	-	XC6115D629ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD630	-	XC6115D630ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD631	-	XC6115D631ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD632	-	XC6115D632ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD633	-	XC6115D633ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD634	-	XC6115D634ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD635	-	XC6115D635ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD636	-	XC6115D636ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD637	-	XC6115D637ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD638	-	XC6115D638ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD639	-	XC6115D639ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD640	-	XC6115D640ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD641	-	XC6115D641ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD642	-	XC6115D642ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD643	-	XC6115D643ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD644	-	XC6115D644ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD645	-	XC6115D645ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD646	-	XC6115D646ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD647	-	XC6115D647ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD648	-	XC6115D648ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD649	-	XC6115D649ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD650	-	XC6115D650ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=100ms	USP-6C	49xq	VD20	9b	Tor
CD7	-	XC9235B37C0R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CD7	-	XC9235B37C4R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CD7	-	XC9235B37CER-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CD8	-	XC9235B38C0R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CD8	-	XC9235B38C4R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CD8	-	XC9235B38CER-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CD9	-	XC9235B39C0R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CD9	-	XC9235B39C4R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CD9	-	XC9235B39CER-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CDA	-	XC9235B3AC0R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CDA	-	XC9235B3AC4R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CDA	-	XC9235B3ACER-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CDB	-	XC9235B3BC0R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CDB	-	XC9235B3BC4R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CDB	-	XC9235B3BCER-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CDC	-	XC9235B3CC0R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CDC	-	XC9235B3CC4R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CDC	-	XC9235B3CCER-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CDD	-	XC9235B3DC0R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CDD	-	XC9235B3DC4R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CDD	-	XC9235B3DCER-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CDE	-	XC9235B3EC0R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CDE	-	XC9235B3EC4R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CDE	-	XC9235B3ECER-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CDF	-	XC9235B3FC0R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CDF	-	XC9235B3FC4R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CDF	-	XC9235B3FCER-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CDH	-	XC9235B3HC0R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CDH	-	XC9235B3HC4R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CDH	-	XC9235B3HCER-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CDK	-	XC9235B3KC0R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CDK	-	XC9235B3KC4R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CDK	-	XC9235B3KCER-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CDL	-	XC9235B3LC0R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CDL	-	XC9235B3LC4R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CDL	-	XC9235B3LCER-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CDM	-	XC9235B3MC0R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CDM	-	XC9235B3MC4R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CDM	-	XC9235B3MCER-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CE	-	BH28RB1WGUT	LVR-IC	LDO, 2.8V±1.0%, 150mA, +CE	BGA-4	63bg*	VR4	9a	Rhm
CE	-	BZX884-B56	Z-diode	56V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
CE	-	R3134K14EA	Vdet-IC	1.4V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CE	-	RP104K181D5	LVR-IC	LDO, 1.85V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CE	-	SN74LVC2G08YZP	CMOS-Log	Dual 2-input AND gates	BGA-8	50	Log51	9v	Ti
CE	-	XC6221B15B7R	LVR-IC	LDO, 1.55V±20mV, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CE	-	XC6223E24B9R-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor




SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CE	-	XC9244A3MC7R-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
CE0	-	XC9235B40C0R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CE0	-	XC9235B40C4R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CE0	-	XC9235B40CER-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CE416	-	XC6115E416ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE417	-	XC6115E417ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE418	-	XC6115E418ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE419	-	XC6115E419ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE420	-	XC6115E420ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE421	-	XC6115E421ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE422	-	XC6115E422ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE423	-	XC6115E423ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE424	-	XC6115E424ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE425	-	XC6115E425ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE426	-	XC6115E426ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE427	-	XC6115E427ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE428	-	XC6115E428ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE429	-	XC6115E429ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE430	-	XC6115E430ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE431	-	XC6115E431ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE432	-	XC6115E432ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE433	-	XC6115E433ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE434	-	XC6115E434ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE435	-	XC6115E435ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE436	-	XC6115E436ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE437	-	XC6115E437ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE438	-	XC6115E438ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE439	-	XC6115E439ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE440	-	XC6115E440ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE441	-	XC6115E441ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE442	-	XC6115E442ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE443	-	XC6115E443ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE444	-	XC6115E444ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE445	-	XC6115E445ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE446	-	XC6115E446ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE447	-	XC6115E447ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE448	-	XC6115E448ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE449	-	XC6115E449ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE450	-	XC6115E450ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=200ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE516	-	XC6115E516ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE517	-	XC6115E517ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE518	-	XC6115E518ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE519	-	XC6115E519ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE520	-	XC6115E520ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE521	-	XC6115E521ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE522	-	XC6115E522ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE523	-	XC6115E523ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE524	-	XC6115E524ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE525	-	XC6115E525ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE526	-	XC6115E526ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE527	-	XC6115E527ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE528	-	XC6115E528ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE529	-	XC6115E529ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE530	-	XC6115E530ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE531	-	XC6115E531ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE532	-	XC6115E532ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE533	-	XC6115E533ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE534	-	XC6115E534ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE535	-	XC6115E535ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE536	-	XC6115E536ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE537	-	XC6115E537ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE538	-	XC6115E538ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE539	-	XC6115E539ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE540	-	XC6115E540ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE541	-	XC6115E541ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE542	-	XC6115E542ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE543	-	XC6115E543ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE544	-	XC6115E544ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE545	-	XC6115E545ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE546	-	XC6115E546ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CE547	-	XC6115E547ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE548	-	XC6115E548ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE549	-	XC6115E549ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE550	-	XC6115E550ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE616	-	XC6115E616ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE617	-	XC6115E617ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE618	-	XC6115E618ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE619	-	XC6115E619ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE620	-	XC6115E620ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE621	-	XC6115E621ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE622	-	XC6115E622ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE623	-	XC6115E623ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE624	-	XC6115E624ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE625	-	XC6115E625ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE626	-	XC6115E626ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE627	-	XC6115E627ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE628	-	XC6115E628ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE629	-	XC6115E629ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE630	-	XC6115E630ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE631	-	XC6115E631ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE632	-	XC6115E632ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE633	-	XC6115E633ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE634	-	XC6115E634ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE635	-	XC6115E635ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE636	-	XC6115E636ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE637	-	XC6115E637ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE638	-	XC6115E638ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE639	-	XC6115E639ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE640	-	XC6115E640ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE641	-	XC6115E641ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE642	-	XC6115E642ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE643	-	XC6115E643ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE644	-	XC6115E644ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE645	-	XC6115E645ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE646	-	XC6115E646ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE647	-	XC6115E647ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE648	-	XC6115E648ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE649	-	XC6115E649ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CE650	-	XC6115E650ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=200ms	USP-6C	49xq	VD20	9b	Tor
CEH	-	TPA2100P1YZH	Lin-IC	AF PA, BTL, class-D, 19Vp-p, piezo speaker, shutdown	BGA-16	39	-	9a	Ti
CEI	-	TPA2031D1YZF	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.5W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Ti
CF	-	BH29RB1WGUT	LVR-IC	LDO, 2.9V±1.0%, 150mA, +CE	BGA-4	63bg*	VR4	9a	Rhm
CF	-	BZX884-B62	Z-diode	62V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
CF	-	R3134K15EA	Vdet-IC	1.5V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CF	-	RP104K191D	LVR-IC	LDO, 1.9V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CF	-	SN74LVC2G14YZP	CMOS-Log	Dual Schmitt-trigger inverter buffers	BGA-6	40	Log34	9v	Ti
CF	-	SN74LVC3G14YZP	CMOS-Log	Triple Schmitt-trigger inverters	BGA-8	50	Log57	9v	Ti
CF	-	XC6221B16B7R	LVR-IC	LDO, 1.65V±20mV, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CF	-	XC6223E25B9R-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CF01	-	R1191L020B	LVR-IC	LDO, 2.0V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF02	-	R1191L021B	LVR-IC	LDO, 2.1V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF03	-	R1191L022B	LVR-IC	LDO, 2.2V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF04	-	R1191L023B	LVR-IC	LDO, 2.3V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF05	-	R1191L024B	LVR-IC	LDO, 2.4V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF06	-	R1191L025B	LVR-IC	LDO, 2.5V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF07	-	R1191L026B	LVR-IC	LDO, 2.6V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF08	-	R1191L027B	LVR-IC	LDO, 2.7V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF09	-	R1191L028B	LVR-IC	LDO, 2.8V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF10	-	R1191L029B	LVR-IC	LDO, 2.9V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF11	-	R1191L030B	LVR-IC	LDO, 3.0V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF12	-	R1191L031B	LVR-IC	LDO, 3.1V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF13	-	R1191L032B	LVR-IC	LDO, 3.2V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF14	-	R1191L033B	LVR-IC	LDO, 3.3V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF15	-	R1191L034B	LVR-IC	LDO, 3.4V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF16	-	R1191L035B	LVR-IC	LDO, 3.5V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF17	-	R1191L036B	LVR-IC	LDO, 3.6V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF18	-	R1191L037B	LVR-IC	LDO, 3.7V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF19	-	R1191L038B	LVR-IC	LDO, 3.8V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF20	-	R1191L039B	LVR-IC	LDO, 3.9V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF21	-	R1191L040B	LVR-IC	LDO, 4.0V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CF22	-	R1191L041B	LVR-IC	LDO, 4.1V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF23	-	R1191L042B	LVR-IC	LDO, 4.2V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF24	-	R1191L043B	LVR-IC	LDO, 4.3V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF25	-	R1191L044B	LVR-IC	LDO, 4.4V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF26	-	R1191L045B	LVR-IC	LDO, 4.5V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF27	-	R1191L046B	LVR-IC	LDO, 4.6V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF28	-	R1191L047B	LVR-IC	LDO, 4.7V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF29	-	R1191L048B	LVR-IC	LDO, 4.8V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF30	-	R1191L049B	LVR-IC	LDO, 4.9V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF31	-	R1191L050B	LVR-IC	LDO, 5.0V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF32	-	R1191L051B	LVR-IC	LDO, 5.1V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF33	-	R1191L052B	LVR-IC	LDO, 5.2V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF34	-	R1191L053B	LVR-IC	LDO, 5.3V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF35	-	R1191L054B	LVR-IC	LDO, 5.4V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF36	-	R1191L055B	LVR-IC	LDO, 5.5V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF37	-	R1191L056B	LVR-IC	LDO, 5.6V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF38	-	R1191L057B	LVR-IC	LDO, 5.7V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF39	-	R1191L058B	LVR-IC	LDO, 5.8V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF40	-	R1191L059B	LVR-IC	LDO, 5.9V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF41	-	R1191L060B	LVR-IC	LDO, 6.0V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF42	-	R1191L061B	LVR-IC	LDO, 6.1V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF43	-	R1191L062B	LVR-IC	LDO, 6.2V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF44	-	R1191L063B	LVR-IC	LDO, 6.3V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF45	-	R1191L064B	LVR-IC	LDO, 6.4V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF46	-	R1191L065B	LVR-IC	LDO, 6.5V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF47	-	R1191L066B	LVR-IC	LDO, 6.6V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF48	-	R1191L067B	LVR-IC	LDO, 6.7V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF49	-	R1191L068B	LVR-IC	LDO, 6.8V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF50	-	R1191L069B	LVR-IC	LDO, 6.9V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF51	-	R1191L070B	LVR-IC	LDO, 7.0V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF516	-	XC6115F516ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF517	-	XC6115F517ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF518	-	XC6115F518ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF519	-	XC6115F519ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF52	-	R1191L071B	LVR-IC	LDO, 7.1V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF520	-	XC6115F520ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF521	-	XC6115F521ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF522	-	XC6115F522ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF523	-	XC6115F523ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF524	-	XC6115F524ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF525	-	XC6115F525ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF526	-	XC6115F526ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF527	-	XC6115F527ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF528	-	XC6115F528ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF529	-	XC6115F529ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF53	-	R1191L072B	LVR-IC	LDO, 7.2V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF530	-	XC6115F530ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF531	-	XC6115F531ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF532	-	XC6115F532ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF533	-	XC6115F533ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF534	-	XC6115F534ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF535	-	XC6115F535ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF536	-	XC6115F536ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF537	-	XC6115F537ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF538	-	XC6115F538ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF539	-	XC6115F539ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF54	-	R1191L073B	LVR-IC	LDO, 7.3V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF540	-	XC6115F540ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF541	-	XC6115F541ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF542	-	XC6115F542ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF543	-	XC6115F543ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF544	-	XC6115F544ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF545	-	XC6115F545ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF546	-	XC6115F546ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF547	-	XC6115F547ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF548	-	XC6115F548ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF549	-	XC6115F549ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF55	-	R1191L074B	LVR-IC	LDO, 7.4V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF550	-	XC6115F550ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=400ms, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF56	-	R1191L075B	LVR-IC	LDO, 7.5V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CF57	-	R1191L076B	LVR-IC	LDO, 7.6V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF58	-	R1191L077B	LVR-IC	LDO, 7.7V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF59	-	R1191L078B	LVR-IC	LDO, 7.8V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF60	-	R1191L079B	LVR-IC	LDO, 7.9V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF61	-	R1191L080B	LVR-IC	LDO, 8.0V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF616	-	XC6115F616ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF617	-	XC6115F617ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF618	-	XC6115F618ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF619	-	XC6115F619ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF62	-	R1191L081B	LVR-IC	LDO, 8.1V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF620	-	XC6115F620ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF621	-	XC6115F621ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF622	-	XC6115F622ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF623	-	XC6115F623ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF624	-	XC6115F624ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF625	-	XC6115F625ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF626	-	XC6115F626ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF627	-	XC6115F627ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF628	-	XC6115F628ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF629	-	XC6115F629ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF63	-	R1191L082B	LVR-IC	LDO, 8.2V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF630	-	XC6115F630ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF631	-	XC6115F631ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF632	-	XC6115F632ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF633	-	XC6115F633ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF634	-	XC6115F634ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF635	-	XC6115F635ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF636	-	XC6115F636ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF637	-	XC6115F637ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF638	-	XC6115F638ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF639	-	XC6115F639ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF64	-	R1191L083B	LVR-IC	LDO, 8.3V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF640	-	XC6115F640ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF641	-	XC6115F641ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF642	-	XC6115F642ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF643	-	XC6115F643ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF644	-	XC6115F644ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF645	-	XC6115F645ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF646	-	XC6115F646ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF647	-	XC6115F647ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF648	-	XC6115F648ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF649	-	XC6115F649ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF65	-	R1191L084B	LVR-IC	LDO, 8.4V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF650	-	XC6115F650ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=400ms	USP-6C	49xq	VD20	9b	Tor
CF66	-	R1191L085B	LVR-IC	LDO, 8.5V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF67	-	R1191L086B	LVR-IC	LDO, 8.6V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF68	-	R1191L087B	LVR-IC	LDO, 8.7V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF69	-	R1191L088B	LVR-IC	LDO, 8.8V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF70	-	R1191L089B	LVR-IC	LDO, 8.9V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF71	-	R1191L090B	LVR-IC	LDO, 9.0V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF72	-	R1191L091B	LVR-IC	LDO, 9.1V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF73	-	R1191L092B	LVR-IC	LDO, 9.2V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF74	-	R1191L093B	LVR-IC	LDO, 9.3V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF75	-	R1191L094B	LVR-IC	LDO, 9.4V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF76	-	R1191L095B	LVR-IC	LDO, 9.5V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF77	-	R1191L096B	LVR-IC	LDO, 9.6V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF78	-	R1191L097B	LVR-IC	LDO, 9.7V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF79	-	R1191L098B	LVR-IC	LDO, 9.8V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF8	-	XC9235B08D0R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CF8	-	XC9235B08D4R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CF8	-	XC9235B08DER-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CF8	-	XCL205B083AR-G	DC-DC-IC	PWM step-down, 3MHz, 0.8V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CF80	-	R1191L099B	LVR-IC	LDO, 9.9V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF81	-	R1191L100B	LVR-IC	LDO, 10.0V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF82	-	R1191L101B	LVR-IC	LDO, 10.1V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF83	-	R1191L102B	LVR-IC	LDO, 10.2V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF84	-	R1191L103B	LVR-IC	LDO, 10.3V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF85	-	R1191L104B	LVR-IC	LDO, 10.4V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF86	-	R1191L105B	LVR-IC	LDO, 10.5V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF87	-	R1191L106B	LVR-IC	LDO, 10.6V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CF88	-	R1191L107B	LVR-IC	LDO, 10.7V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF89	-	R1191L108B	LVR-IC	LDO, 10.8V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF9	-	XC9235B09D0R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CF9	-	XC9235B09D4R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CF9	-	XC9235B09DER-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CF9	-	XCL205B093AR-G	DC-DC-IC	PWM step-down, 3MHz, 0.9V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CF90	-	R1191L109B	LVR-IC	LDO, 10.9V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF91	-	R1191L110B	LVR-IC	LDO, 11.0V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF92	-	R1191L111B	LVR-IC	LDO, 11.1V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF93	-	R1191L112B	LVR-IC	LDO, 11.2V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF94	-	R1191L113B	LVR-IC	LDO, 11.3V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF95	-	R1191L114B	LVR-IC	LDO, 11.4V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF96	-	R1191L115B	LVR-IC	LDO, 11.5V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF97	-	R1191L116B	LVR-IC	LDO, 11.6V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF98	-	R1191L117B	LVR-IC	LDO, 11.7V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CF99	-	R1191L118B	LVR-IC	LDO, 11.8V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CFB	-	XC6213B12A7R-G	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFB	-	XC6213B12AGR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFC	-	XC6213B13A7R-G	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFC	-	XC6213B13AGR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFD	-	XC6213B14A7R-G	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFD	-	XC6213B14AGR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFE	-	XC6213B15A7R-G	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFE	-	XC6213B15AGR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFF	-	XC6213B16A7R-G	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFF	-	XC6213B16AGR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFH	-	XC6213B17A7R-G	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFH	-	XC6213B17AGR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFK	-	XC6213B18A7R-G	LVR-IC	LDO, 1.85V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFK	-	XC6213B18AGR	LVR-IC	LDO, 1.85V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFL	-	XC6213B19A7R-G	LVR-IC	LDO, 1.95V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFL	-	XC6213B19AGR	LVR-IC	LDO, 1.95V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFL	-	XC9235B0LD0R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CFL	-	XC9235B0LD4R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CFL	-	XC9235B0LDER-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CFL	-	XCL205B0L3AR-G	DC-DC-IC	PWM step-down, 3MHz, 0.85V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CFM	-	XC6213B20A7R-G	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFM	-	XC6213B20AGR	LVR-IC	LDO, 2.05V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFM	-	XC9235B0MD0R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CFM	-	XC9235B0MD4R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CFM	-	XC9235B0MDER-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CFM	-	XCL205B0M3AR-G	DC-DC-IC	PWM step-down, 3MHz, 0.95V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CFN	-	XC6213B21A7R-G	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFN	-	XC6213B21AGR	LVR-IC	LDO, 2.15V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFP	-	XC6213B22A7R-G	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFP	-	XC6213B22AGR	LVR-IC	LDO, 2.25V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFR	-	XC6213B23A7R-G	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFR	-	XC6213B23AGR	LVR-IC	LDO, 2.35V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFS	-	XC6213B24A7R-G	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFS	-	XC6213B24AGR	LVR-IC	LDO, 2.45V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFT	-	XC6213B25A7R-G	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFT	-	XC6213B25AGR	LVR-IC	LDO, 2.55V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFU	-	XC6213B26A7R-G	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFU	-	XC6213B26AGR	LVR-IC	LDO, 2.65V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFV	-	XC6213B27A7R-G	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFV	-	XC6213B27AGR	LVR-IC	LDO, 2.75V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFX	-	XC6213B28A7R-G	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFX	-	XC6213B28AGR	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFY	-	XC6213B29A7R-G	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFY	-	XC6213B29AGR	LVR-IC	LDO, 2.95V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CFZ	-	XC6213B30A7R-G	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CFZ	-	XC6213B30AGR	LVR-IC	LDO, 3.05V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CG	-	BH30RB1WGUT	LVR-IC	LDO, 3.0V±1.0%, 150mA, +CE	BGA-4	63bg*	VR4	9a	Rhm
CG	-	BZX884-B68	Z-diode	68V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
CG	-	R3134K16EA	Vdet-IC	1.6V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CG	-	RP104K201D	LVR-IC	LDO, 2.0V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CG	-	SN74LVC2G32YZP	CMOS-Log	Dual 2-input OR gates	BGA-8	50	Log52	9v	Ti
CG01	-	R1191L119B	LVR-IC	LDO, 11.9V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG02	-	R1191L120B	LVR-IC	LDO, 12.0V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG03	-	R1191L121B	LVR-IC	LDO, 12.1V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CG04	-	R1191L122B	LVR-IC	LDO, 12.2V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG05	-	R1191L123B	LVR-IC	LDO, 12.3V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG06	-	R1191L124B	LVR-IC	LDO, 12.4V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG07	-	R1191L125B	LVR-IC	LDO, 12.5V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG08	-	R1191L126B	LVR-IC	LDO, 12.6V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG09	-	R1191L127B	LVR-IC	LDO, 12.7V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG10	-	R1191L128B	LVR-IC	LDO, 12.8V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG11	-	R1191L129B	LVR-IC	LDO, 12.9V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG12	-	R1191L130B	LVR-IC	LDO, 13.0V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG13	-	R1191L131B	LVR-IC	LDO, 13.1V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG14	-	R1191L132B	LVR-IC	LDO, 13.2V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG15	-	R1191L133B	LVR-IC	LDO, 13.3V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG16	-	R1191L134B	LVR-IC	LDO, 13.4V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG17	-	R1191L135B	LVR-IC	LDO, 13.5V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG18	-	R1191L136B	LVR-IC	LDO, 13.6V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG19	-	R1191L137B	LVR-IC	LDO, 13.7V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG20	-	R1191L138B	LVR-IC	LDO, 13.8V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG21	-	R1191L139B	LVR-IC	LDO, 13.9V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG22	-	R1191L140B	LVR-IC	LDO, 14.0V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG23	-	R1191L141B	LVR-IC	LDO, 14.1V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG24	-	R1191L142B	LVR-IC	LDO, 14.2V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG25	-	R1191L143B	LVR-IC	LDO, 14.3V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG26	-	R1191L144B	LVR-IC	LDO, 14.4V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG27	-	R1191L145B	LVR-IC	LDO, 14.5V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG28	-	R1191L146B	LVR-IC	LDO, 14.6V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG29	-	R1191L147B	LVR-IC	LDO, 14.7V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG30	-	R1191L148B	LVR-IC	LDO, 14.8V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG31	-	R1191L149B	LVR-IC	LDO, 14.9V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CG32	-	R1191L150B	LVR-IC	LDO, 15.0V±1.5%, 300mA, +CE, ECO	DFN1616-6	79c9	VR10	9ba	Ric
CGD	-	TPA2035D1YZF	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.75W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Ti
CH	-	BH31RB1WGUT	LVR-IC	LDO, 3.1V±1.0%, 150mA, +CE	BGA-4	63bg*	VR4	9a	Rhm
CH	-	BZX884-B75	Z-diode	75V±2%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
CH	-	LD6805K/14H	LVR-IC	LDO, 1.4V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
CH	-	R3134K17EA	Vdet-IC	1.7V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CH	-	RP104K251D	LVR-IC	LDO, 2.5V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CH	-	RT9193T-18PQV	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
CH	-	XC6221B17B7R	LVR-IC	LDO, 1.75V±20mV, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CH	-	XC6223E26B9R-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CH0	-	XC9235B10D0R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CH0	-	XC9235B10D4R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CH0	-	XC9235B10DER-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CH0	-	XCL205B103AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.0V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CH01	-	R1191L020D	LVR-IC	LDO, 2.0V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH02	-	R1191L021D	LVR-IC	LDO, 2.1V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH03	-	R1191L022D	LVR-IC	LDO, 2.2V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH04	-	R1191L023D	LVR-IC	LDO, 2.3V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH05	-	R1191L024D	LVR-IC	LDO, 2.4V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH06	-	R1191L025D	LVR-IC	LDO, 2.5V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH07	-	R1191L026D	LVR-IC	LDO, 2.6V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH08	-	R1191L027D	LVR-IC	LDO, 2.7V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH09	-	R1191L028D	LVR-IC	LDO, 2.8V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH1	-	XC9235B11D0R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CH1	-	XC9235B11D4R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CH1	-	XC9235B11DER-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CH1	-	XCL205B113AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.1V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CH10	-	R1191L029D	LVR-IC	LDO, 2.9V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH11	-	R1191L030D	LVR-IC	LDO, 3.0V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH12	-	R1191L031D	LVR-IC	LDO, 3.1V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH13	-	R1191L032D	LVR-IC	LDO, 3.2V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH14	-	R1191L033D	LVR-IC	LDO, 3.3V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH15	-	R1191L034D	LVR-IC	LDO, 3.4V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH16	-	R1191L035D	LVR-IC	LDO, 3.5V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH17	-	R1191L036D	LVR-IC	LDO, 3.6V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH18	-	R1191L037D	LVR-IC	LDO, 3.7V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH19	-	R1191L038D	LVR-IC	LDO, 3.8V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH2	-	XC9235B12D0R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CH2	-	XC9235B12D4R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CH2	-	XC9235B12DER-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CH2	-	XCL205B123AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.2V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CH20	-	R1191L039D	LVR-IC	LDO, 3.9V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CH21	-	R1191L040D	LVR-IC	LDO, 4.0V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH22	-	R1191L041D	LVR-IC	LDO, 4.1V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH23	-	R1191L042D	LVR-IC	LDO, 4.2V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH24	-	R1191L043D	LVR-IC	LDO, 4.3V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH25	-	R1191L044D	LVR-IC	LDO, 4.4V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH26	-	R1191L045D	LVR-IC	LDO, 4.5V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH27	-	R1191L046D	LVR-IC	LDO, 4.6V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH28	-	R1191L047D	LVR-IC	LDO, 4.7V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH29	-	R1191L048D	LVR-IC	LDO, 4.8V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH3	-	XC9235B13D0R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CH3	-	XC9235B13D4R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CH3	-	XC9235B13DER-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CH3	-	XCL205B133AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.3V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CH30	-	R1191L049D	LVR-IC	LDO, 4.9V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH31	-	R1191L050D	LVR-IC	LDO, 5.0V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH32	-	R1191L051D	LVR-IC	LDO, 5.1V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH33	-	R1191L052D	LVR-IC	LDO, 5.2V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH34	-	R1191L053D	LVR-IC	LDO, 5.3V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH35	-	R1191L054D	LVR-IC	LDO, 5.4V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH36	-	R1191L055D	LVR-IC	LDO, 5.5V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH37	-	R1191L056D	LVR-IC	LDO, 5.6V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH38	-	R1191L057D	LVR-IC	LDO, 5.7V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH39	-	R1191L058D	LVR-IC	LDO, 5.8V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH4	-	XC9235B14D0R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CH4	-	XC9235B14D4R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CH4	-	XC9235B14DER-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CH4	-	XCL205B143AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.4V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CH40	-	R1191L059D	LVR-IC	LDO, 5.9V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH41	-	R1191L060D	LVR-IC	LDO, 6.0V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH42	-	R1191L061D	LVR-IC	LDO, 6.1V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH43	-	R1191L062D	LVR-IC	LDO, 6.2V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH44	-	R1191L063D	LVR-IC	LDO, 6.3V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH45	-	R1191L064D	LVR-IC	LDO, 6.4V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH46	-	R1191L065D	LVR-IC	LDO, 6.5V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH47	-	R1191L066D	LVR-IC	LDO, 6.6V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH48	-	R1191L067D	LVR-IC	LDO, 6.7V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH49	-	R1191L068D	LVR-IC	LDO, 6.8V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH5	-	XC9235B15D0R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CH5	-	XC9235B15D4R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CH5	-	XC9235B15DER-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CH5	-	XCL205B153AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.5V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CH50	-	R1191L069D	LVR-IC	LDO, 6.9V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH51	-	R1191L070D	LVR-IC	LDO, 7.0V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH52	-	R1191L071D	LVR-IC	LDO, 7.1V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH53	-	R1191L072D	LVR-IC	LDO, 7.2V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH54	-	R1191L073D	LVR-IC	LDO, 7.3V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH55	-	R1191L074D	LVR-IC	LDO, 7.4V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH56	-	R1191L075D	LVR-IC	LDO, 7.5V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH57	-	R1191L076D	LVR-IC	LDO, 7.6V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH58	-	R1191L077D	LVR-IC	LDO, 7.7V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH59	-	R1191L078D	LVR-IC	LDO, 7.8V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH6	-	XC9235B16D0R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CH6	-	XC9235B16D4R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CH6	-	XC9235B16DER-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CH6	-	XCL205B163AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.6V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CH60	-	R1191L079D	LVR-IC	LDO, 7.9V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH61	-	R1191L080D	LVR-IC	LDO, 8.0V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH616	-	XC6115H616ER	Vdet-IC	1.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH617	-	XC6115H617ER	Vdet-IC	1.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH618	-	XC6115H618ER	Vdet-IC	1.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH619	-	XC6115H619ER	Vdet-IC	1.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH62	-	R1191L081D	LVR-IC	LDO, 8.1V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH620	-	XC6115H620ER	Vdet-IC	2.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH621	-	XC6115H621ER	Vdet-IC	2.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH622	-	XC6115H622ER	Vdet-IC	2.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH623	-	XC6115H623ER	Vdet-IC	2.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH624	-	XC6115H624ER	Vdet-IC	2.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH625	-	XC6115H625ER	Vdet-IC	2.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH626	-	XC6115H626ER	Vdet-IC	2.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH627	-	XC6115H627ER	Vdet-IC	2.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CH628	-	XC6115H628ER	Vdet-IC	2.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH629	-	XC6115H629ER	Vdet-IC	2.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH63	-	R1191L082D	LVR-IC	LDO, 8.2V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH630	-	XC6115H630ER	Vdet-IC	3.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH631	-	XC6115H631ER	Vdet-IC	3.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH632	-	XC6115H632ER	Vdet-IC	3.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH633	-	XC6115H633ER	Vdet-IC	3.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH634	-	XC6115H634ER	Vdet-IC	3.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH635	-	XC6115H635ER	Vdet-IC	3.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH636	-	XC6115H636ER	Vdet-IC	3.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH637	-	XC6115H637ER	Vdet-IC	3.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH638	-	XC6115H638ER	Vdet-IC	3.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH639	-	XC6115H639ER	Vdet-IC	3.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH64	-	R1191L083D	LVR-IC	LDO, 8.3V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH640	-	XC6115H640ER	Vdet-IC	4.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH641	-	XC6115H641ER	Vdet-IC	4.1V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH642	-	XC6115H642ER	Vdet-IC	4.2V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH643	-	XC6115H643ER	Vdet-IC	4.3V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH644	-	XC6115H644ER	Vdet-IC	4.4V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH645	-	XC6115H645ER	Vdet-IC	4.5V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH646	-	XC6115H646ER	Vdet-IC	4.6V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH647	-	XC6115H647ER	Vdet-IC	4.7V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH648	-	XC6115H648ER	Vdet-IC	4.8V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH649	-	XC6115H649ER	Vdet-IC	4.9V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH65	-	R1191L084D	LVR-IC	LDO, 8.4V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH650	-	XC6115H650ER	Vdet-IC	5.0V±2%, +Rst PPO, -Rst ODO, Wt=1.6s, Rt=1.6s	USP-6C	49xq	VD20	9b	Tor
CH66	-	R1191L085D	LVR-IC	LDO, 8.5V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH67	-	R1191L086D	LVR-IC	LDO, 8.6V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH68	-	R1191L087D	LVR-IC	LDO, 8.7V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH69	-	R1191L088D	LVR-IC	LDO, 8.8V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH7	-	XC9235B17D0R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CH7	-	XC9235B17D4R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CH7	-	XC9235B17DER-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CH7	-	XCL205B173AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.7V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CH70	-	R1191L089D	LVR-IC	LDO, 8.9V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH71	-	R1191L090D	LVR-IC	LDO, 9.0V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH72	-	R1191L091D	LVR-IC	LDO, 9.1V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH73	-	R1191L092D	LVR-IC	LDO, 9.2V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH74	-	R1191L093D	LVR-IC	LDO, 9.3V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH75	-	R1191L094D	LVR-IC	LDO, 9.4V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH76	-	R1191L095D	LVR-IC	LDO, 9.5V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH77	-	R1191L096D	LVR-IC	LDO, 9.6V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH78	-	R1191L097D	LVR-IC	LDO, 9.7V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH79	-	R1191L098D	LVR-IC	LDO, 9.8V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH8	-	XC9235B18D0R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CH8	-	XC9235B18D4R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CH8	-	XC9235B18DER-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CH8	-	XCL205B183AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.8V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CH80	-	R1191L099D	LVR-IC	LDO, 9.9V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH81	-	R1191L100D	LVR-IC	LDO, 10.0V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH82	-	R1191L101D	LVR-IC	LDO, 10.1V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH83	-	R1191L102D	LVR-IC	LDO, 10.2V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH84	-	R1191L103D	LVR-IC	LDO, 10.3V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH85	-	R1191L104D	LVR-IC	LDO, 10.4V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH86	-	R1191L105D	LVR-IC	LDO, 10.5V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH87	-	R1191L106D	LVR-IC	LDO, 10.6V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH88	-	R1191L107D	LVR-IC	LDO, 10.7V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH89	-	R1191L108D	LVR-IC	LDO, 10.8V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH9	-	XC9235B19D0R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CH9	-	XC9235B19D4R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CH9	-	XC9235B19DER-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CH9	-	XCL205B193AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.9V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CH90	-	R1191L109D	LVR-IC	LDO, 10.9V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH91	-	R1191L110D	LVR-IC	LDO, 11.0V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH92	-	R1191L111D	LVR-IC	LDO, 11.1V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH93	-	R1191L112D	LVR-IC	LDO, 11.2V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH94	-	R1191L113D	LVR-IC	LDO, 11.3V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH95	-	R1191L114D	LVR-IC	LDO, 11.4V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH96	-	R1191L115D	LVR-IC	LDO, 11.5V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH97	-	R1191L116D	LVR-IC	LDO, 11.6V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CH98	-	R1191L117D	LVR-IC	LDO, 11.7V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CH99	-	R1191L118D	LVR-IC	LDO, 11.8V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CHA	-	XC9235B1AD0R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CHA	-	XC9235B1AD4R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CHA	-	XC9235B1ADER-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CHA	-	XCL205B1A3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.05V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CHA3	-	CTLT853-M833	Si-npn	HV, 200V, 6A, 4.5W, B=100..300, 190MHz	TLM833	62as	-	9m	Cen
CHA4	-	CTLT953-M833	Si-pnp	HV, 140V, 5A, 4.5W, B=100..300, 150MHz	TLM833	62as	-	9m	Cen
CHB	-	XC9235B1BD0R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CHB	-	XC9235B1BD4R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CHB	-	XC9235B1BDER-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CHB	-	XCL205B1B3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.15V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CHC	-	XC9235B1CD0R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CHC	-	XC9235B1CD4R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CHC	-	XC9235B1CDER-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CHC	-	XCL205B1C3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.25V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CHD	-	XC9235B1DD0R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CHD	-	XC9235B1DD4R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CHD	-	XC9235B1DDER-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CHD	-	XCL205B1D3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.35V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CHE	-	XC9235B1ED0R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CHE	-	XC9235B1ED4R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CHE	-	XC9235B1EDER-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CHE	-	XCL205B1E3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.45V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CHF	-	XC9235B1FD0R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CHF	-	XC9235B1FD4R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CHF	-	XC9235B1FDER-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CHF	-	XCL205B1F3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.55V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CHH	-	XC9235B1HD0R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CHH	-	XC9235B1HD4R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CHH	-	XC9235B1HDER-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CHH	-	XCL205B1H3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.65V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CHK	-	XC9235B1KD0R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CHK	-	XC9235B1KD4R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CHK	-	XC9235B1KDER-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CHK	-	XCL205B1K3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.75V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CHL	-	XC9235B1LD0R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CHL	-	XC9235B1LD4R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CHL	-	XC9235B1LDER-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CHL	-	XCL205B1L3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.85V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CHM	-	XC9235B1MD0R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CHM	-	XC9235B1MD4R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CHM	-	XC9235B1MDER-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CHM	-	XCL205B1M3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.95V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CJ	-	BH33RB1WGUT	LVR-IC	LDO, 3.3V±1.0%, 150mA, +CE	BGA-4	63bg*	VR4	9a	Rhm
CJ	-	R3134K18EA	Vdet-IC	1.8V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CJ	-	RP104K261D	LVR-IC	LDO, 2.6V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CJ01	-	R1191L119D	LVR-IC	LDO, 11.9V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ02	-	R1191L120D	LVR-IC	LDO, 12.0V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ03	-	R1191L121D	LVR-IC	LDO, 12.1V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ04	-	R1191L122D	LVR-IC	LDO, 12.2V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ05	-	R1191L123D	LVR-IC	LDO, 12.3V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ06	-	R1191L124D	LVR-IC	LDO, 12.4V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ07	-	R1191L125D	LVR-IC	LDO, 12.5V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ08	-	R1191L126D	LVR-IC	LDO, 12.6V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ09	-	R1191L127D	LVR-IC	LDO, 12.7V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ10	-	R1191L128D	LVR-IC	LDO, 12.8V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ11	-	R1191L129D	LVR-IC	LDO, 12.9V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ12	-	R1191L130D	LVR-IC	LDO, 13.0V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ13	-	R1191L131D	LVR-IC	LDO, 13.1V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ14	-	R1191L132D	LVR-IC	LDO, 13.2V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ15	-	R1191L133D	LVR-IC	LDO, 13.3V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ16	-	R1191L134D	LVR-IC	LDO, 13.4V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ17	-	R1191L135D	LVR-IC	LDO, 13.5V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ18	-	R1191L136D	LVR-IC	LDO, 13.6V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ19	-	R1191L137D	LVR-IC	LDO, 13.7V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ20	-	R1191L138D	LVR-IC	LDO, 13.8V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ21	-	R1191L139D	LVR-IC	LDO, 13.9V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ22	-	R1191L140D	LVR-IC	LDO, 14.0V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ23	-	R1191L141D	LVR-IC	LDO, 14.1V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CJ24	-	R1191L142D	LVR-IC	LDO, 14.2V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ25	-	R1191L143D	LVR-IC	LDO, 14.3V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ26	-	R1191L144D	LVR-IC	LDO, 14.4V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ27	-	R1191L145D	LVR-IC	LDO, 14.5V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ28	-	R1191L146D	LVR-IC	LDO, 14.6V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ29	-	R1191L147D	LVR-IC	LDO, 14.7V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ30	-	R1191L148D	LVR-IC	LDO, 14.8V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ31	-	R1191L149D	LVR-IC	LDO, 14.9V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CJ32	-	R1191L150D	LVR-IC	LDO, 15.0V±1.5%, 300mA, +CE, ECO, CL	DFN1616-6	79c9	VR10	9ba	Ric
CK	-	R3134K19EA	Vdet-IC	1.9V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CK	-	RP104K271D	LVR-IC	LDO, 2.7V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CK	-	RT9193-2HPQV	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
CK	-	SN74LVC2G240YZP	CMOS-Log	Dual bus buffer inverted with 3-state output	BGA-8	50	Log67	9v	Ti
CK	-	XC6221B18B7R	LVR-IC	LDO, 1.85V±20mV, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CK	-	XC6223E27B9R-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CK0	-	XC9235B20D0R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CK0	-	XC9235B20D4R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CK0	-	XC9235B20DER-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CK0	-	XCL205B203AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.0V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CK1	-	XC9235B21D0R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CK1	-	XC9235B21D4R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CK1	-	XC9235B21DER-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CK1	-	XCL205B213AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.1V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CK2	-	XC9235B22D0R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CK2	-	XC9235B22D4R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CK2	-	XC9235B22DER-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CK2	-	XCL205B223AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.2V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CK3	-	XC9235B23D0R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CK3	-	XC9235B23D4R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CK3	-	XC9235B23DER-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CK3	-	XCL205B233AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.3V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CK4	-	XC9235B24D0R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CK4	-	XC9235B24D4R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CK4	-	XC9235B24DER-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CK4	-	XCL205B243AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.4V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CK5	-	XC9235B25D0R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CK5	-	XC9235B25D4R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CK5	-	XC9235B25DER-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CK5	-	XCL205B253AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.5V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CK6	-	XC9235B26D0R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CK6	-	XC9235B26D4R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CK6	-	XC9235B26DER-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CK6	-	XCL205B263AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.6V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CK7	-	XC9235B27D0R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CK7	-	XC9235B27D4R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CK7	-	XC9235B27DER-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CK7	-	XCL205B273AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.7V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CK8	-	XC9235B28D0R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CK8	-	XC9235B28D4R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CK8	-	XC9235B28DER-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CK8	-	XCL205B283AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.8V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CK9	-	XC9235B29D0R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CK9	-	XC9235B29D4R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CK9	-	XC9235B29DER-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CK9	-	XCL205B293AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.9V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CKA	-	XC9235B2AD0R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CKA	-	XC9235B2AD4R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CKA	-	XC9235B2ADER-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CKA	-	XCL205B2A3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.05V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CKB	-	XC9235B2BD0R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CKB	-	XC9235B2BD4R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CKB	-	XC9235B2BDER-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CKB	-	XCL205B2B3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.15V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CKC	-	XC9235B2CD0R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CKC	-	XC9235B2CD4R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CKC	-	XC9235B2CDER-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CKC	-	XCL205B2C3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.25V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CKD	-	XC9235B2DD0R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CKD	-	XC9235B2DD4R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CKD	-	XC9235B2DDER-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CKD	-	XCL205B2D3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.35V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CKE	-	XC9235B2ED0R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CKE	-	XC9235B2ED4R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CKE	-	XC9235B2EDER-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CKE	-	XCL205B2E3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.45V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CKF	-	XC9235B2FD0R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CKF	-	XC9235B2FD4R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CKF	-	XC9235B2FDER-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CKF	-	XCL205B2F3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.55V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CKH	-	XC9235B2HD0R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CKH	-	XC9235B2HD4R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CKH	-	XC9235B2HDER-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CKH	-	XCL205B2H3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.65V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CKK	-	XC9235B2KD0R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CKK	-	XC9235B2KD4R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CKK	-	XC9235B2KDER-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CKK	-	XCL205B2K3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.75V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CKL	-	XC9235B2LD0R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CKL	-	XC9235B2LD4R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CKL	-	XC9235B2LDER-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CKL	-	XCL205B2L3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.85V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CKM	-	XC9235B2MD0R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CKM	-	XC9235B2MD4R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CKM	-	XC9235B2MDER-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CKM	-	XCL205B2M3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.95V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CL	-	R3134K20EA	Vdet-IC	2.0V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CL	-	RP104K281D	LVR-IC	LDO, 2.8V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CL	-	XC6221B19B7R	LVR-IC	LDO, 1.95V±20mV, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CL	-	XC6223E28B9R-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CL0	-	XC9235B30D0R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CL0	-	XC9235B30D4R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CL0	-	XC9235B30DER-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CL0	-	XCL205B303AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.0V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CL1	-	XC9235B31D0R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CL1	-	XC9235B31D4R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CL1	-	XC9235B31DER-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CL1	-	XCL205B313AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.1V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CL2	-	XC9235B32D0R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CL2	-	XC9235B32D4R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CL2	-	XC9235B32DER-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CL2	-	XCL205B323AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.2V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CL3	-	XC9235B33D0R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CL3	-	XC9235B33D4R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CL3	-	XC9235B33DER-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CL3	-	XCL205B333AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.3V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CL4	-	XC9235B34D0R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CL4	-	XC9235B34D4R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CL4	-	XC9235B34DER-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CL4	-	XCL205B343AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.4V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CL5	-	XC9235B35D0R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CL5	-	XC9235B35D4R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CL5	-	XC9235B35DER-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CL5	-	XCL205B353AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.5V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CL6	-	XC9235B36D0R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CL6	-	XC9235B36D4R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CL6	-	XC9235B36DER-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CL6	-	XCL205B363AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.6V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CL7	-	XC9235B37D0R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CL7	-	XC9235B37D4R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CL7	-	XC9235B37DER-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CL7	-	XCL205B373AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.7V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CL8	-	XC9235B38D0R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CL8	-	XC9235B38D4R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CL8	-	XC9235B38DER-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CL8	-	XCL205B383AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.8V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CL9	-	XC9235B39D0R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CL9	-	XC9235B39D4R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CL9	-	XC9235B39DER-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CL9	-	XCL205B393AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.9V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CLA	-	XC9235B3AD0R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CLA	-	XC9235B3AD4R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CLA	-	XC9235B3ADER-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CLA	-	XCL205B3A3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.05V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CLB	-	XC9235B3BD0R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CLB	-	XC9235B3BD4R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CLB	-	XC9235B3BDER-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CLB	-	XCL205B3B3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.15V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CLC	-	XC9235B3CD0R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CLC	-	XC9235B3CD4R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CLC	-	XC9235B3CDER-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CLC	-	XCL205B3C3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.25V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CLD	-	XC9235B3DD0R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CLD	-	XC9235B3DD4R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CLD	-	XC9235B3DDER-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CLD	-	XCL205B3D3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.35V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CLE	-	XC9235B3ED0R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CLE	-	XC9235B3ED4R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CLE	-	XC9235B3EDER-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CLE	-	XCL205B3E3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.45V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CLF	-	XC9235B3FD0R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CLF	-	XC9235B3FD4R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CLF	-	XC9235B3FDER-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CLF	-	XCL205B3F3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.55V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CLH	-	XC9235B3HD0R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CLH	-	XC9235B3HD4R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CLH	-	XC9235B3HDER-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CLH	-	XCL205B3H3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.65V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CLK	-	XC9235B3KD0R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CLK	-	XC9235B3KD4R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CLK	-	XC9235B3KDER-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CLK	-	XCL205B3K3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.75V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CLL	-	XC9235B3LD0R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CLL	-	XC9235B3LD4R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CLL	-	XC9235B3LDER-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CLL	-	XCL205B3L3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.85V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CLM	-	XC9235B3MD0R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CLM	-	XC9235B3MD4R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CLM	-	XC9235B3MDER-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CLM	-	XCL205B3M3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.95V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CM	-	R3134K21EA	Vdet-IC	2.1V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CM	-	RP104K281D5	LVR-IC	LDO, 2.85V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CM	-	SiP21106DVP-46-E3	LVR-IC	LDO, 4.6V±1%, 150mA, +CE	TSC75-6L	91ub	VR7	9m	Vs
CM	-	SN74LVC2G125YZP	CMOS-Log	Dual bus buffer with 3-state output	BGA-8	50	Log54	9v	Ti
CM	-	XC6221B20B7R	LVR-IC	LDO, 2.05V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CM	-	XC6223E29B9R-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CM0	-	XC6213B31A7R-G	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CM0	-	XC6213B31AGR	LVR-IC	LDO, 3.15V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CM0	-	XC9235B40D0R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CM0	-	XC9235B40D4R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CM0	-	XC9235B40DER-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CM0	-	XCL205B403AR-G	DC-DC-IC	PWM step-down, 3MHz, 4.0V±2%, 600mA, -CE, CL	CL-2025	67dc7	DC9	9a	Tor
CM1	-	XC6213B32A7R-G	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CM1	-	XC6213B32AGR	LVR-IC	LDO, 3.25V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CM2	-	XC6213B33A7R-G	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CM2	-	XC6213B33AGR	LVR-IC	LDO, 3.35V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CM3	-	XC6213B34A7R-G	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CM3	-	XC6213B34AGR	LVR-IC	LDO, 3.45V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CM4	-	XC6213B35A7R-G	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CM4	-	XC6213B35AGR	LVR-IC	LDO, 3.55V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CM5	-	XC6213B36A7R-G	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CM5	-	XC6213B36AGR	LVR-IC	LDO, 3.65V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CM6	-	XC6213B37A7R-G	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CM6	-	XC6213B37AGR	LVR-IC	LDO, 3.75V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CM7	-	XC6213B38A7R-G	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CM7	-	XC6213B38AGR	LVR-IC	LDO, 3.85V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CM8	-	XC6213B39A7R-G	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CM8	-	XC6213B39AGR	LVR-IC	LDO, 3.95V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CM9	-	XC6213B40A7R-G	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CM9	-	XC6213B40AGR	LVR-IC	LDO, 4.05V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CMA	-	XC6213B41A7R-G	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CMA	-	XC6213B41AGR	LVR-IC	LDO, 4.15V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CMB	-	XC6213B42A7R-G	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CMB	-	XC6213B42AGR	LVR-IC	LDO, 4.25V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CMC	-	XC6213B43A7R-G	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CMC	-	XC6213B43AGR	LVR-IC	LDO, 4.35V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CMD	-	XC6213B44A7R-G	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CMD	-	XC6213B44AGR	LVR-IC	LDO, 4.45V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CME	-	XC6213B45A7R-G	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CME	-	XC6213B45AGR	LVR-IC	LDO, 4.55V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CMF	-	XC6213B46A7R-G	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CMF	-	XC6213B46AGR	LVR-IC	LDO, 4.65V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CMH	-	XC6213B47A7R-G	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CMH	-	XC6213B47AGR	LVR-IC	LDO, 4.75V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CMK	-	XC6213B48A7R-G	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CMK	-	XC6213B48AGR	LVR-IC	LDO, 4.85V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CML	-	XC6213B49A7R-G	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CML	-	XC6213B49AGR	LVR-IC	LDO, 4.95V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CN	-	R3134K22EA	Vdet-IC	2.2V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CN	-	RP104K291D	LVR-IC	LDO, 2.9V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CN	-	SN74LVC2G126YZP	CMOS-Log	Bus buffer gate with 3-state output	BGA-8	50	Log13	9v	Ti
CN	-	XC6221B21B7R	LVR-IC	LDO, 2.15V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CN	-	XC6223E30B9R-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CN8	-	XC9235G08C0R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CN8	-	XC9235G08C4R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CN8	-	XC9235G08CER-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CN9	-	XC9235G09C0R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CN9	-	XC9235G09C4R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CN9	-	XC9235G09CER-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CNL	-	XC9235G0LC0R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CNL	-	XC9235G0LC4R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CNL	-	XC9235G0LCER-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CNM	-	XC9235G0MC0R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CNM	-	XC9235G0MC4R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CNM	-	XC9235G0MCER-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CP	-	LD6805K/14P	LVR-IC	LDO, 1.4V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
CP	-	R3134K23EA	Vdet-IC	2.3V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CP	-	RP104K301D	LVR-IC	LDO, 3.0V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CP	-	XC6221B22B7R	LVR-IC	LDO, 2.25V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CP	-	XC6223E31B9R-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CP0	-	XC9235G10C0R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CP0	-	XC9235G10C4R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CP0	-	XC9235G10CER-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CP1	-	XC9235G11C0R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CP1	-	XC9235G11C4R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CP1	-	XC9235G11CER-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CP2	-	XC9235G12C0R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CP2	-	XC9235G12C4R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CP2	-	XC9235G12CER-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CP3	-	XC9235G13C0R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CP3	-	XC9235G13C4R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CP3	-	XC9235G13CER-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CP4	-	XC9235G14C0R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CP4	-	XC9235G14C4R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CP4	-	XC9235G14CER-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CP5	-	XC9235G15C0R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CP5	-	XC9235G15C4R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CP5	-	XC9235G15CER-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CP6	-	XC9235G16C0R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CP6	-	XC9235G16C4R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CP6	-	XC9235G16CER-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CP7	-	XC9235G17C0R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CP7	-	XC9235G17C4R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CP7	-	XC9235G17CER-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CP8	-	XC9235G18C0R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CP8	-	XC9235G18C4R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CP8	-	XC9235G18CER-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CP9	-	XC9235G19C0R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CP9	-	XC9235G19C4R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CP9	-	XC9235G19CER-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CPA	-	XC9235G1AC0R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CPA	-	XC9235G1AC4R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CPA	-	XC9235G1ACER-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CPB	-	XC9235G1BC0R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CPB	-	XC9235G1BC4R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CPB	-	XC9235G1BCER-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CPC	-	XC9235G1CC0R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CPC	-	XC9235G1CC4R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CPC	-	XC9235G1CCER-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CPD	-	XC9235G1DC0R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CPD	-	XC9235G1DC4R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CPD	-	XC9235G1DCER-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CPE	-	XC9235G1EC0R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CPE	-	XC9235G1EC4R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CPE	-	XC9235G1ECER-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CPF	-	XC9235G1FC0R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CPF	-	XC9235G1FC4R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CPF	-	XC9235G1FCER-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CPH	-	XC9235G1HC0R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CPH	-	XC9235G1HC4R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CPH	-	XC9235G1HCER-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CPK	-	XC9235G1KC0R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CPK	-	XC9235G1KC4R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CPK	-	XC9235G1KCER-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CPL	-	XC9235G1LC0R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CPL	-	XC9235G1LC4R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CPL	-	XC9235G1LCER-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CPM	-	XC9235G1MC0R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CPM	-	XC9235G1MC4R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CPM	-	XC9235G1MCER-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CQ	-	RP104K321D	LVR-IC	LDO, 3.2V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CR	-	R3134K24EA	Vdet-IC	2.4V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CR	-	RP104K331D	LVR-IC	LDO, 3.3V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CR	-	XC6221B23B7R	LVR-IC	LDO, 2.35V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CR	-	XC6223E32B9R-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CR0	-	XC9235G20C0R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CR0	-	XC9235G20C4R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CR0	-	XC9235G20CER-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CR1	-	XC9235G21C0R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CR1	-	XC9235G21C4R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CR1	-	XC9235G21CER-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CR2	-	XC9235G22C0R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CR2	-	XC9235G22C4R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CR2	-	XC9235G22CER-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CR3	-	XC9235G23C0R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CR3	-	XC9235G23C4R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CR3	-	XC9235G23CER-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CR4	-	XC9235G24C0R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CR4	-	XC9235G24C4R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CR4	-	XC9235G24CER-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CR5	-	XC9235G25C0R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CR5	-	XC9235G25C4R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CR5	-	XC9235G25CER-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CR6	-	XC9235G26C0R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CR6	-	XC9235G26C4R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CR6	-	XC9235G26CER-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CR7	-	XC9235G27C0R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CR7	-	XC9235G27C4R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CR7	-	XC9235G27CER-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CR8	-	XC9235G28C0R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CR8	-	XC9235G28C4R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CR8	-	XC9235G28CER-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CR9	-	XC9235G29C0R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CR9	-	XC9235G29C4R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CR9	-	XC9235G29CER-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CRA	-	XC9235G2AC0R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CRA	-	XC9235G2AC4R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CRA	-	XC9235G2ACER-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CRB	-	XC9235G2BC0R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CRB	-	XC9235G2BC4R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CRB	-	XC9235G2BCER-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CRC	-	XC9235G2CC0R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CRC	-	XC9235G2CC4R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CRC	-	XC9235G2CCER-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CRD	-	XC9235G2DC0R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CRD	-	XC9235G2DC4R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CRD	-	XC9235G2DCER-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CRE	-	XC9235G2EC0R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CRE	-	XC9235G2EC4R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CRE	-	XC9235G2ECER-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CRF	-	XC9235G2FC0R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CRF	-	XC9235G2FC4R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CRF	-	XC9235G2FCER-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CRH	-	XC9235G2HC0R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CRH	-	XC9235G2HC4R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CRH	-	XC9235G2HCER-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CRK	-	XC9235G2KC0R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CRK	-	XC9235G2KC4R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CRK	-	XC9235G2KCER-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CRL	-	XC9235G2LC0R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CRL	-	XC9235G2LC4R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CRL	-	XC9235G2LCER-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CRM	-	XC9235G2MC0R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CRM	-	XC9235G2MC4R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CRM	-	XC9235G2MCER-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CS	-	R3134K25EA	Vdet-IC	2.5V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CS	-	RP104K311D	LVR-IC	LDO, 3.1V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CS	-	XC6221B24B7R	LVR-IC	LDO, 2.45V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CS	-	XC6223E33B9R-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CS0	-	XC9235G30C0R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CS0	-	XC9235G30C4R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CS0	-	XC9235G30CER-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CS1	-	GS6202UQRF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CS1	-	XC9235G31C0R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CS1	-	XC9235G31C4R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CS1	-	XC9235G31CER-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CS2	-	GS6202UFQF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CS2	-	XC9235G32C0R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CS2	-	XC9235G32C4R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CS2	-	XC9235G32CER-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CS3	-	GS6202UQQF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CS3	-	XC9235G33C0R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CS3	-	XC9235G33C4R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CS3	-	XC9235G33CER-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CS4	-	XC9235G34C0R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CS4	-	XC9235G34C4R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CS4	-	XC9235G34CER-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CS5	-	XC9235G35C0R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CS5	-	XC9235G35C4R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CS5	-	XC9235G35CER-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CS6	-	XC9235G36C0R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CS6	-	XC9235G36C4R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CS6	-	XC9235G36CER-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CS7	-	XC9235G37C0R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CS7	-	XC9235G37C4R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CS7	-	XC9235G37CER-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CS8	-	XC9235G38C0R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CS8	-	XC9235G38C4R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CS8	-	XC9235G38CER-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CS9	-	XC9235G39C0R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CS9	-	XC9235G39C4R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CS9	-	XC9235G39CER-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CSA	-	GS6202URRF	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSA	-	XC9235G3AC0R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CSA	-	XC9235G3AC4R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CSA	-	XC9235G3ACER-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CSB	-	GS6202UJRF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSB	-	XC9235G3BC0R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CSB	-	XC9235G3BC4R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CSB	-	XC9235G3BCER-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CSC	-	GS6202UHRF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CSC	-	XC9235G3CC0R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CSC	-	XC9235G3CC4R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CSC	-	XC9235G3CCER-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CSD	-	GS6202UFRF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSD	-	XC9235G3DC0R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CSD	-	XC9235G3DC4R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CSD	-	XC9235G3DCER-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CSE	-	GS6202UGRF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSE	-	XC9235G3EC0R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CSE	-	XC9235G3EC4R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CSE	-	XC9235G3ECER-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CSF	-	GS6202UDRF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSF	-	XC9235G3FC0R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CSF	-	XC9235G3FC4R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CSF	-	XC9235G3FCER-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CSG	-	GS6202UJJF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSH	-	GS6202UHJF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSH	-	XC9235G3HC0R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CSH	-	XC9235G3HC4R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CSH	-	XC9235G3HCER-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CSJ	-	GS6202UFJF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSK	-	GS6202UGJF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSK	-	XC9235G3KC0R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CSK	-	XC9235G3KC4R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CSK	-	XC9235G3KCER-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CSL	-	GS6202UDJF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSL	-	XC9235G3LC0R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CSL	-	XC9235G3LC4R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CSL	-	XC9235G3LCER-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CSM	-	GS6202UHHF	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSM	-	XC9235G3MC0R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CSM	-	XC9235G3MC4R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CSM	-	XC9235G3MCER-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CSN	-	GS6202UFHF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSP	-	GS6202UGHF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSQ	-	GS6202UDHF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSR	-	GS6202UFFF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSS	-	GS6202UGFF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CST	-	GS6202UDFF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSU	-	GS6202UGGF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSV	-	GS6202UDGF	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CSW	-	GS6202U11F	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 250mA, +CE	UFN-6	56xv	VR19	9m	Glo
CT	-	R3134K26EA	Vdet-IC	2.6V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CT	-	RP104K241D	LVR-IC	LDO, 2.4V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CT	-	SiP21106DVP-285-E3	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	TSC75-6L	91ub	VR7	9m	Vs
CT	-	SN74LVC2G06YZP	CMOS-Log	Dual inverter buffers/drivers (ODO)	BGA-6	40	Log25	9v	Ti
CT	-	SN74LVC3G06YZP	CMOS-Log	Triple inverters (ODO)	BGA-8	50	Log72	9v	Ti
CT	-	XC6221B25B7R	LVR-IC	LDO, 2.55V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CT	-	XC6223E34B9R-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CT0	-	XC9235G40C0R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CT0	-	XC9235G40C4R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CT0	-	XC9235G40CER-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CU	-	R3134K27EA	Vdet-IC	2.7V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CU	-	RP104K221D	LVR-IC	LDO, 2.2V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CU	-	SiP21106DVP-475-E3	LVR-IC	LDO, 4.75V±1%, 150mA, +CE	TSC75-6L	91ub	VR7	9m	Vs
CU	-	SN74LVC1G27YZP	CMOS-Log	3-input NOR gate	BGA-6	40	Log31	9v	Ti
CU	-	XC6221B26B7R	LVR-IC	LDO, 2.65V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CU	-	XC6223E35B9R-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CU06	-	RP505K061A	DC-DC-IC	PWM/VFM st-dwn, 0.6V±18mV, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU07	-	RP505K071A	DC-DC-IC	PWM/VFM st-dwn, 0.7V±18mV, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU08	-	RP505K081A	DC-DC-IC	PWM/VFM st-dwn, 0.8V±18mV, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU09	-	RP505K091A	DC-DC-IC	PWM/VFM st-dwn, 0.9V±18mV, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU10	-	RP505K101A	DC-DC-IC	PWM/VFM st-dwn, 1.0V±18mV, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU11	-	RP505K111A	DC-DC-IC	PWM/VFM st-dwn, 1.1V±18mV, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU12	-	RP505K121A	DC-DC-IC	PWM/VFM st-dwn, 1.2V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU13	-	RP505K131A	DC-DC-IC	PWM/VFM st-dwn, 1.3V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU14	-	RP505K141A	DC-DC-IC	PWM/VFM st-dwn, 1.4V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU15	-	RP505K151A	DC-DC-IC	PWM/VFM st-dwn, 1.5V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU16	-	RP505K161A	DC-DC-IC	PWM/VFM st-dwn, 1.6V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU17	-	RP505K171A	DC-DC-IC	PWM/VFM st-dwn, 1.7V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CU18	-	RP505K181A	DC-DC-IC	PWM/VFM st-dwn, 1.8V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU19	-	RP505K191A	DC-DC-IC	PWM/VFM st-dwn, 1.9V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU20	-	RP505K201A	DC-DC-IC	PWM/VFM st-dwn, 2.0V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU21	-	RP505K211A	DC-DC-IC	PWM/VFM st-dwn, 2.1V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU22	-	RP505K221A	DC-DC-IC	PWM/VFM st-dwn, 2.2V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU23	-	RP505K231A	DC-DC-IC	PWM/VFM st-dwn, 2.3V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU24	-	RP505K241A	DC-DC-IC	PWM/VFM st-dwn, 2.4V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU25	-	RP505K251A	DC-DC-IC	PWM/VFM st-dwn, 2.5V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU26	-	RP505K261A	DC-DC-IC	PWM/VFM st-dwn, 2.6V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU27	-	RP505K271A	DC-DC-IC	PWM/VFM st-dwn, 2.7V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU28	-	RP505K281A	DC-DC-IC	PWM/VFM st-dwn, 2.8V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU29	-	RP505K291A	DC-DC-IC	PWM/VFM st-dwn, 2.9V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU30	-	RP505K301A	DC-DC-IC	PWM/VFM st-dwn, 3.0V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU31	-	RP505K311A	DC-DC-IC	PWM/VFM st-dwn, 3.1V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU32	-	RP505K321A	DC-DC-IC	PWM/VFM st-dwn, 3.2V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU33	-	RP505K331A	DC-DC-IC	PWM/VFM st-dwn, 3.3V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e2	DC8	9b	Ric
CU8	-	XC9235G08D0R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CU8	-	XC9235G08D4R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CU8	-	XC9235G08DER-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CU9	-	XC9235G09D0R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CU9	-	XC9235G09D4R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CU9	-	XC9235G09DER-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CUL	-	XC9235G0LD0R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CUL	-	XC9235G0LD4R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CUL	-	XC9235G0LDER-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CUM	-	XC9235G0MD0R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CUM	-	XC9235G0MD4R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CUM	-	XC9235G0MDER-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CV	-	R3134K28EA	Vdet-IC	2.8V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CV	-	RP104K231D	LVR-IC	LDO, 2.3V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CV	-	SN74LVC2G07YZP	CMOS-Log	Dual noninverting buffers/drivers (ODO)	BGA-6	40	Log26	9v	Ti
CV	-	SN74LVC3G07YZP	CMOS-Log	Triple noninverting buffers/drivers (ODO)	BGA-8	50	Log73	9v	Ti
CV	-	XC6221B27B7R	LVR-IC	LDO, 2.75V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CV	-	XC6223E36B9R-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CV0	-	XC9235G10D0R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CV0	-	XC9235G10D4R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CV0	-	XC9235G10DER-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CV06	-	RP505K061B	DC-DC-IC	PWM/VFM st-dwn, 0.6V±18mV, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV07	-	RP505K071B	DC-DC-IC	PWM/VFM st-dwn, 0.7V±18mV, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV08	-	RP505K081B	DC-DC-IC	PWM/VFM st-dwn, 0.8V±18mV, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV09	-	RP505K091B	DC-DC-IC	PWM/VFM st-dwn, 0.9V±18mV, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV1	-	XC9235G11D0R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CV1	-	XC9235G11D4R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CV1	-	XC9235G11DER-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CV10	-	RP505K101B	DC-DC-IC	PWM/VFM st-dwn, 1.0V±18mV, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV11	-	RP505K111B	DC-DC-IC	PWM/VFM st-dwn, 1.1V±18mV, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV12	-	RP505K121B	DC-DC-IC	PWM/VFM st-dwn, 1.2V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV13	-	RP505K131B	DC-DC-IC	PWM/VFM st-dwn, 1.3V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV14	-	RP505K141B	DC-DC-IC	PWM/VFM st-dwn, 1.4V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV15	-	RP505K151B	DC-DC-IC	PWM/VFM st-dwn, 1.5V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV16	-	RP505K161B	DC-DC-IC	PWM/VFM st-dwn, 1.6V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV17	-	RP505K171B	DC-DC-IC	PWM/VFM st-dwn, 1.7V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV18	-	RP505K181B	DC-DC-IC	PWM/VFM st-dwn, 1.8V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV19	-	RP505K191B	DC-DC-IC	PWM/VFM st-dwn, 1.9V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV2	-	XC9235G12D0R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CV2	-	XC9235G12D4R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CV2	-	XC9235G12DER-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CV20	-	RP505K201B	DC-DC-IC	PWM/VFM st-dwn, 2.0V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV21	-	RP505K211B	DC-DC-IC	PWM/VFM st-dwn, 2.1V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV22	-	RP505K221B	DC-DC-IC	PWM/VFM st-dwn, 2.2V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV23	-	RP505K231B	DC-DC-IC	PWM/VFM st-dwn, 2.3V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV24	-	RP505K241B	DC-DC-IC	PWM/VFM st-dwn, 2.4V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV25	-	RP505K251B	DC-DC-IC	PWM/VFM st-dwn, 2.5V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV26	-	RP505K261B	DC-DC-IC	PWM/VFM st-dwn, 2.6V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV27	-	RP505K271B	DC-DC-IC	PWM/VFM st-dwn, 2.7V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV28	-	RP505K281B	DC-DC-IC	PWM/VFM st-dwn, 2.8V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV29	-	RP505K291B	DC-DC-IC	PWM/VFM st-dwn, 2.9V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV3	-	XC9235G13D0R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CV3	-	XC9235G13D4R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CV3	-	XC9235G13DER-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CV30	-	RP505K301B	DC-DC-IC	PWM/VFM st-dwn, 3.0V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV31	-	RP505K311B	DC-DC-IC	PWM/VFM st-dwn, 3.1V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV32	-	RP505K321B	DC-DC-IC	PWM/VFM st-dwn, 3.2V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV33	-	RP505K331B	DC-DC-IC	PWM/VFM st-dwn, 3.3V±1.5%, 1A, 2.25MHz, +CE, CL, Mode	DFN2020-8	75e2	DC8	9b	Ric
CV4	-	XC9235G14D0R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CV4	-	XC9235G14D4R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CV4	-	XC9235G14DER-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CV5	-	XC9235G15D0R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CV5	-	XC9235G15D4R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CV5	-	XC9235G15DER-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CV6	-	XC9235G16D0R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CV6	-	XC9235G16D4R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CV6	-	XC9235G16DER-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CV7	-	XC9235G17D0R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CV7	-	XC9235G17D4R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CV7	-	XC9235G17DER-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CV8	-	XC9235G18D0R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CV8	-	XC9235G18D4R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CV8	-	XC9235G18DER-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CV9	-	XC9235G19D0R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CV9	-	XC9235G19D4R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CV9	-	XC9235G19DER-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CVA	-	XC9235G1AD0R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CVA	-	XC9235G1AD4R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CVA	-	XC9235G1ADER-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CVB	-	XC9235G1BD0R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CVB	-	XC9235G1BD4R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CVB	-	XC9235G1BDER-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CVC	-	XC9235G1CD0R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CVC	-	XC9235G1CD4R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CVC	-	XC9235G1CDER-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CVD	-	XC9235G1DD0R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CVD	-	XC9235G1DD4R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CVD	-	XC9235G1DDER-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CVE	-	XC9235G1ED0R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CVE	-	XC9235G1ED4R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CVE	-	XC9235G1EDER-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CVF	-	XC9235G1FD0R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CVF	-	XC9235G1FD4R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CVF	-	XC9235G1FDER-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CVH	-	XC9235G1HD0R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CVH	-	XC9235G1HD4R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CVH	-	XC9235G1HDER-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CVK	-	XC9235G1KD0R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CVK	-	XC9235G1KD4R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CVK	-	XC9235G1KDER-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CVL	-	XC9235G1LD0R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CVL	-	XC9235G1LD4R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CVL	-	XC9235G1LDER-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CVM	-	XC9235G1MD0R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CVM	-	XC9235G1MD4R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CVM	-	XC9235G1MDER-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CVV	-	TPA2036D1YZF	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.75W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Ti
CW	-	R3134K29EA	Vdet-IC	2.9V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CW	-	RP104K271D5	LVR-IC	LDO, 2.75V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CW00	-	RP505K001C	DC-DC-IC	PWM/VFM st-dwn, Adj. 0.6..3.3V±1.5%, 1A, 2.25MHz, +CE, Mode	DFN2020-8	75e3	DC22	9b	Ric
CX	-	R3134K30EA	Vdet-IC	3.0V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CX	-	RP104K211D	LVR-IC	LDO, 2.1V±0.8%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
CX	-	XC6221B28B7R	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CX	-	XC6223E37B9R-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CX0	-	XC9235G20D0R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CX0	-	XC9235G20D4R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CX0	-	XC9235G20DER-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CX00	-	RP132K001B	LVR-IC	LDO, Adj. 0.8..5.5V±1%, 1A, +CE	DFN1820-6	74e7	VR16	9b	Ric
CX01	-	RP132K121B5	LVR-IC	LDO, 1.25V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX02	-	RP132K181B5	LVR-IC	LDO, 1.85V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX03	-	RP132K281B5	LVR-IC	LDO, 2.85V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX08	-	RP132K081B	LVR-IC	LDO, 0.8V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX09	-	RP132K091B	LVR-IC	LDO, 0.9V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX1	-	XC9235G21D0R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CX1	-	XC9235G21D4R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CX1	-	XC9235G21DER-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CX10	-	RP132K101B	LVR-IC	LDO, 1.0V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX11	-	RP132K111B	LVR-IC	LDO, 1.1V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX12	-	RP132K121B	LVR-IC	LDO, 1.2V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX13	-	RP132K131B	LVR-IC	LDO, 1.3V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX14	-	RP132K141B	LVR-IC	LDO, 1.4V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX15	-	RP132K151B	LVR-IC	LDO, 1.5V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX16	-	RP132K161B	LVR-IC	LDO, 1.6V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX17	-	RP132K171B	LVR-IC	LDO, 1.7V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX18	-	RP132K181B	LVR-IC	LDO, 1.8V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX19	-	RP132K191B	LVR-IC	LDO, 1.9V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX2	-	XC9235G22D0R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CX2	-	XC9235G22D4R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CX2	-	XC9235G22DER-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CX20	-	RP132K201B	LVR-IC	LDO, 2.0V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX21	-	RP132K211B	LVR-IC	LDO, 2.1V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX22	-	RP132K221B	LVR-IC	LDO, 2.2V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX23	-	RP132K231B	LVR-IC	LDO, 2.3V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX24	-	RP132K241B	LVR-IC	LDO, 2.4V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX25	-	RP132K251B	LVR-IC	LDO, 2.5V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX26	-	RP132K261B	LVR-IC	LDO, 2.6V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX27	-	RP132K271B	LVR-IC	LDO, 2.7V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX28	-	RP132K281B	LVR-IC	LDO, 2.8V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX29	-	RP132K291B	LVR-IC	LDO, 2.9V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX3	-	XC9235G23D0R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CX3	-	XC9235G23D4R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CX3	-	XC9235G23DER-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CX30	-	RP132K301B	LVR-IC	LDO, 3.0V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX31	-	RP132K311B	LVR-IC	LDO, 3.1V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX32	-	RP132K321B	LVR-IC	LDO, 3.2V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX33	-	RP132K331B	LVR-IC	LDO, 3.3V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX34	-	RP132K341B	LVR-IC	LDO, 3.4V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX35	-	RP132K351B	LVR-IC	LDO, 3.5V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX36	-	RP132K361B	LVR-IC	LDO, 3.6V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX37	-	RP132K371B	LVR-IC	LDO, 3.7V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX38	-	RP132K381B	LVR-IC	LDO, 3.8V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX39	-	RP132K391B	LVR-IC	LDO, 3.9V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX4	-	XC9235G24D0R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CX4	-	XC9235G24D4R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CX4	-	XC9235G24DER-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CX40	-	RP132K401B	LVR-IC	LDO, 4.0V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX41	-	RP132K411B	LVR-IC	LDO, 4.1V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX42	-	RP132K421B	LVR-IC	LDO, 4.2V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX43	-	RP132K431B	LVR-IC	LDO, 4.3V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX44	-	RP132K441B	LVR-IC	LDO, 4.4V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX45	-	RP132K451B	LVR-IC	LDO, 4.5V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX46	-	RP132K461B	LVR-IC	LDO, 4.6V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX47	-	RP132K471B	LVR-IC	LDO, 4.7V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX48	-	RP132K481B	LVR-IC	LDO, 4.8V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX49	-	RP132K491B	LVR-IC	LDO, 4.9V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX5	-	XC9235G25D0R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CX5	-	XC9235G25D4R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CX5	-	XC9235G25DER-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CX50	-	RP132K501B	LVR-IC	LDO, 5.0V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX51	-	RP132K511B	LVR-IC	LDO, 5.1V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX52	-	RP132K521B	LVR-IC	LDO, 5.2V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX53	-	RP132K531B	LVR-IC	LDO, 5.3V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX54	-	RP132K541B	LVR-IC	LDO, 5.4V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX55	-	RP132K551B	LVR-IC	LDO, 5.5V±1%, 1A, +CE	DFN1820-6	74e6	VR5	9b	Ric
CX6	-	XC9235G26D0R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CX6	-	XC9235G26D4R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CX6	-	XC9235G26DER-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CX7	-	XC9235G27D0R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CX7	-	XC9235G27D4R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CX7	-	XC9235G27DER-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CX8	-	XC9235G28D0R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CX8	-	XC9235G28D4R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CX8	-	XC9235G28DER-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CX9	-	XC9235G29D0R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CX9	-	XC9235G29D4R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CX9	-	XC9235G29DER-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CXA	-	XC9235G2AD0R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CXA	-	XC9235G2AD4R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CXA	-	XC9235G2ADER-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CXB	-	XC6213B1227R-G	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXB	-	XC6213B122GR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXB	-	XC9235G2BD0R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CXB	-	XC9235G2BD4R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CXB	-	XC9235G2BDER-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CXC	-	XC6213B1327R-G	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXC	-	XC6213B132GR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXC	-	XC9235G2CD0R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CXC	-	XC9235G2CD4R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CXC	-	XC9235G2CDER-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CXD	-	XC6213B1427R-G	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXD	-	XC6213B142GR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXD	-	XC9235G2DD0R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CXD	-	XC9235G2DD4R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CXD	-	XC9235G2DDER-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CXE	-	XC6213B1527R-G	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXE	-	XC6213B152GR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXE	-	XC9235G2ED0R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CXE	-	XC9235G2ED4R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CXE	-	XC9235G2EDER-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CXF	-	XC6213B1627R-G	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXF	-	XC6213B162GR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXF	-	XC9235G2FD0R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CXF	-	XC9235G2FD4R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CXF	-	XC9235G2FDER-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CXH	-	XC6213B1727R-G	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXH	-	XC6213B172GR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXH	-	XC9235G2HD0R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CXH	-	XC9235G2HD4R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CXH	-	XC9235G2HDER-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CXK	-	XC6213B1827R-G	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXK	-	XC6213B182GR	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXK	-	XC9235G2KD0R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CXK	-	XC9235G2KD4R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CXK	-	XC9235G2KDER-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CXL	-	XC6213B1927R-G	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXL	-	XC6213B192GR	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXL	-	XC9235G2LD0R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CXL	-	XC9235G2LD4R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CXL	-	XC9235G2LDER-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CXM	-	XC6213B2027R-G	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXM	-	XC6213B202GR	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXM	-	XC9235G2MD0R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CXM	-	XC9235G2MD4R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CXM	-	XC9235G2MDER-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CXN	-	XC6213B2127R-G	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXN	-	XC6213B212GR	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXP	-	XC6213B2227R-G	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXP	-	XC6213B222GR	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXR	-	XC6213B2327R-G	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXR	-	XC6213B232GR	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXS	-	XC6213B2427R-G	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXS	-	XC6213B242GR	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXT	-	XC6213B2527R-G	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXT	-	XC6213B252GR	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXU	-	XC6213B2627R-G	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXU	-	XC6213B262GR	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXV	-	XC6213B2727R-G	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXV	-	XC6213B272GR	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXX	-	XC6213B2827R-G	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXX	-	XC6213B282GR	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXY	-	XC6213B2927R-G	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXY	-	XC6213B292GR	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor
CXZ	-	XC6213B3027R-G	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	USPN-4	58vm	VR4	9h	Tor
CXZ	-	XC6213B302GR	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	USP-4	45vm	VR4	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CY	-	R3134K31EA	Vdet-IC	3.1V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CY	-	XC6221B29B7R	LVR-IC	LDO, 2.95V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CY	-	XC6223E38B9R-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CY0	-	XC9235G30D0R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CY0	-	XC9235G30D4R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CY0	-	XC9235G30DER-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CY00	-	RP132K001D	LVR-IC	LDO, Adj. 0.8..5.5V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR16	9b	Ric
CY01	-	RP132K121D5	LVR-IC	LDO, 1.25V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY02	-	RP132K181D5	LVR-IC	LDO, 1.85V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY03	-	RP132K281D5	LVR-IC	LDO, 2.85V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY08	-	RP132K081D	LVR-IC	LDO, 0.8V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY09	-	RP132K091D	LVR-IC	LDO, 0.9V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY1	-	XC9235G31D0R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CY1	-	XC9235G31D4R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CY1	-	XC9235G31DER-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CY10	-	RP132K101D	LVR-IC	LDO, 1.0V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY11	-	RP132K111D	LVR-IC	LDO, 1.1V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY12	-	RP132K121D	LVR-IC	LDO, 1.2V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY13	-	RP132K131D	LVR-IC	LDO, 1.3V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY14	-	RP132K141D	LVR-IC	LDO, 1.4V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY15	-	RP132K151D	LVR-IC	LDO, 1.5V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY16	-	RP132K161D	LVR-IC	LDO, 1.6V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY17	-	RP132K171D	LVR-IC	LDO, 1.7V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY18	-	RP132K181D	LVR-IC	LDO, 1.8V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY19	-	RP132K191D	LVR-IC	LDO, 1.9V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY2	-	XC9235G32D0R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CY2	-	XC9235G32D4R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CY2	-	XC9235G32DER-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CY20	-	RP132K201D	LVR-IC	LDO, 2.0V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY21	-	RP132K211D	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY22	-	RP132K221D	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY23	-	RP132K231D	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY24	-	RP132K241D	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY25	-	RP132K251D	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY26	-	RP132K261D	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY27	-	RP132K271D	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY28	-	RP132K281D	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY29	-	RP132K291D	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY3	-	XC9235G33D0R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CY3	-	XC9235G33D4R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CY3	-	XC9235G33DER-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CY30	-	RP132K301D	LVR-IC	LDO, 3.0V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY31	-	RP132K311D	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY32	-	RP132K321D	LVR-IC	LDO, 3.2V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY33	-	RP132K331D	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY34	-	RP132K341D	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY35	-	RP132K351D	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY36	-	RP132K361D	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY37	-	RP132K371D	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY38	-	RP132K381D	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY39	-	RP132K391D	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY4	-	XC9235G34D0R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CY4	-	XC9235G34D4R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CY4	-	XC9235G34DER-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CY40	-	RP132K401D	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY41	-	RP132K411D	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY42	-	RP132K421D	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY43	-	RP132K431D	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY44	-	RP132K441D	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY45	-	RP132K451D	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY46	-	RP132K461D	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY47	-	RP132K471D	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY48	-	RP132K481D	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY49	-	RP132K491D	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY5	-	XC9235G35D0R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CY5	-	XC9235G35D4R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CY5	-	XC9235G35DER-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CY50	-	RP132K501D	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY51	-	RP132K511D	LVR-IC	LDO, 5.1V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY52	-	RP132K521D	LVR-IC	LDO, 5.2V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CY53	-	RP132K531D	LVR-IC	LDO, 5.3V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY54	-	RP132K541D	LVR-IC	LDO, 5.4V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY55	-	RP132K551D	LVR-IC	LDO, 5.6V±1%, 1A, +CE, CL	DFN1820-6	74e6	VR5	9b	Ric
CY6	-	XC9235G36D0R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CY6	-	XC9235G36D4R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CY6	-	XC9235G36DER-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CY7	-	XC9235G37D0R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CY7	-	XC9235G37D4R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CY7	-	XC9235G37DER-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CY8	-	XC9235G38D0R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CY8	-	XC9235G38D4R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CY8	-	XC9235G38DER-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CY9	-	XC9235G39D0R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CY9	-	XC9235G39D4R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CY9	-	XC9235G39DER-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CYA	-	XC9235G3AD0R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CYA	-	XC9235G3AD4R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CYA	-	XC9235G3ADER-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CYAAG	-	AIC1750-AAGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=1.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYABG	-	AIC1750-ABGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=1.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYACG	-	AIC1750-ACGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=1.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYADG	-	AIC1750-ADGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=1.4V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYAEG	-	AIC1750-AEGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=1.5V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYAFG	-	AIC1750-AFGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=1.6V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYAGG	-	AIC1750-AGGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=1.7V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYAHG	-	AIC1750-AHGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=1.8V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYAIG	-	AIC1750-AIGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=1.9V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYAJG	-	AIC1750-AJGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=2.0V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYAKG	-	AIC1750-AKGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=2.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYALG	-	AIC1750-ALGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=2.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYAMG	-	AIC1750-AMGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=2.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYANG	-	AIC1750-ANGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=2.4V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYAOG	-	AIC1750-AOGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=2.5V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYAPG	-	AIC1750-APGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=2.6V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYAQG	-	AIC1750-AQGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=2.7V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYARG	-	AIC1750-ARGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=2.8V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYASG	-	AIC1750-ASGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=2.9V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYATG	-	AIC1750-ATGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=3.0V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYAUG	-	AIC1750-AUGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=3.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYAVG	-	AIC1750-AVGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=3.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYAWG	-	AIC1750-AWGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=3.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYAXG	-	AIC1750-AXGDA	LVR-IC	LDO, Dual out, Vout1=1.1V, Vout2=2.85V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYB	-	XC9235G3BD0R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CYB	-	XC9235G3BD4R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CYB	-	XC9235G3BDER-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CYBAG	-	AIC1750-BAGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=1.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBBG	-	AIC1750-BBGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=1.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBCG	-	AIC1750-BCGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=1.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBDG	-	AIC1750-BDGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=1.4V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBEG	-	AIC1750-BEGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=1.5V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBFG	-	AIC1750-BFGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=1.6V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBGG	-	AIC1750-BGGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=1.7V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBHG	-	AIC1750-BHGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=1.8V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBIG	-	AIC1750-BIGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=1.9V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBJG	-	AIC1750-BJGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=2.0V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBKG	-	AIC1750-BKGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=2.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBLG	-	AIC1750-BLGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=2.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBMG	-	AIC1750-BMGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=2.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBNG	-	AIC1750-BNGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=2.4V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBOG	-	AIC1750-BOGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=2.5V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBPG	-	AIC1750-BPGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=2.6V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBQG	-	AIC1750-BQGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=2.7V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBRG	-	AIC1750-BRGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=2.8V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBSG	-	AIC1750-BSGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=2.9V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBTG	-	AIC1750-BTGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=3.0V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBUG	-	AIC1750-BUGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=3.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBVG	-	AIC1750-BVGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=3.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBWG	-	AIC1750-BWGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=3.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYBXG	-	AIC1750-BXGDA	LVR-IC	LDO, Dual out, Vout1=1.2V, Vout2=2.85V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYC	-	XC9235G3CD0R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CYC	-	XC9235G3CD4R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CYC	-	XC9235G3CDER-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CYCAG	-	AIC1750-CAGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=1.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCBG	-	AIC1750-CBGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=1.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCCG	-	AIC1750-CCGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=1.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCDG	-	AIC1750-CDGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=1.4V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCEG	-	AIC1750-CEGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=1.5V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCFG	-	AIC1750-CFGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=1.6V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCGG	-	AIC1750-CGGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=1.7V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCHG	-	AIC1750-CHGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=1.8V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCIG	-	AIC1750-CIGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=1.9V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCJG	-	AIC1750-CJGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=2.0V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCKG	-	AIC1750-CKGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=2.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCLG	-	AIC1750-CLGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=2.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCMG	-	AIC1750-CMGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=2.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCNG	-	AIC1750-CNGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=2.4V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCOG	-	AIC1750-COGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=2.5V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCPG	-	AIC1750-CPGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=2.6V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCQG	-	AIC1750-CQGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=2.7V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCRG	-	AIC1750-CRGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=2.8V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCSG	-	AIC1750-CSGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=2.9V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCTG	-	AIC1750-CYGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=3.0V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCUG	-	AIC1750-CUGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=3.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCVG	-	AIC1750-CVGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=3.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCWG	-	AIC1750-CWGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=3.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYCXG	-	AIC1750-CXGDA	LVR-IC	LDO, Dual out, Vout1=1.3V, Vout2=2.85V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYD	-	XC9235G3DD0R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CYD	-	XC9235G3DD4R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CYD	-	XC9235G3DDER-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CYDAG	-	AIC1750-DAGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=1.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDBG	-	AIC1750-DBGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=1.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDCG	-	AIC1750-DCGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=1.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDDG	-	AIC1750-DDGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=1.4V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDEG	-	AIC1750-DEGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=1.5V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDFG	-	AIC1750-DFGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=1.6V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDGG	-	AIC1750-DGGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=1.7V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDHG	-	AIC1750-DHGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=1.8V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDIG	-	AIC1750-DIGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=1.9V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDJG	-	AIC1750-DJGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=2.0V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDKG	-	AIC1750-DKGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=2.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDLG	-	AIC1750-DLGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=2.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDMG	-	AIC1750-DMGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=2.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDNG	-	AIC1750-DNGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=2.4V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDOG	-	AIC1750-DOGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=2.5V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDPG	-	AIC1750-DPGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=2.6V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDQG	-	AIC1750-DQGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=2.7V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDRG	-	AIC1750-DRGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=2.8V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDSG	-	AIC1750-DSGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=2.9V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDTG	-	AIC1750-DTGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=3.0V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDUG	-	AIC1750-DUGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=3.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDVG	-	AIC1750-DVGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=3.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDWG	-	AIC1750-DWGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=3.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYDXG	-	AIC1750-DXGDA	LVR-IC	LDO, Dual out, Vout1=1.4V, Vout2=2.85V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYE	-	XC9235G3ED0R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CYE	-	XC9235G3ED4R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CYE	-	XC9235G3EDER-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CYEAG	-	AIC1750-EAGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=1.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYEBG	-	AIC1750-EBGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=1.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYECG	-	AIC1750-ECGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=1.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYEDG	-	AIC1750-EDGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=1.4V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYEEG	-	AIC1750-EEGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=1.5V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYEFG	-	AIC1750-EFGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=1.6V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYEGG	-	AIC1750-EGGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=1.7V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYEHG	-	AIC1750-EHGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=1.8V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYEIG	-	AIC1750-EIGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=1.9V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYEJG	-	AIC1750-EJGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=2.0V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYEKG	-	AIC1750-EKGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=2.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYELG	-	AIC1750-ELGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=2.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYEMG	-	AIC1750-EMGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=2.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYENG	-	AIC1750-ENGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=2.4V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CYEOG	-	AIC1750-EOGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=2.5V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYEPG	-	AIC1750-EPGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=2.6V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYEQG	-	AIC1750-EQGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=2.7V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYERG	-	AIC1750-ERGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=2.8V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYESG	-	AIC1750-ESGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=2.9V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYETG	-	AIC1750-ETGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=3.0V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYEUG	-	AIC1750-EUGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=3.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYEVG	-	AIC1750-EVGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=3.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYEWG	-	AIC1750-EWGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=3.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYEXG	-	AIC1750-EXGDA	LVR-IC	LDO, Dual out, Vout1=1.5V, Vout2=2.85V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYF	-	XC9235G3FD0R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CYF	-	XC9235G3FD4R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CYF	-	XC9235G3FDER-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CYFAG	-	AIC1750-FAGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=1.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFBG	-	AIC1750-FBGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=1.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFCG	-	AIC1750-FCGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=1.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFDG	-	AIC1750-FDGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=1.4V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFEG	-	AIC1750-FEGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=1.5V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFFG	-	AIC1750-FFGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=1.6V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFGG	-	AIC1750-FGGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=1.7V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFHG	-	AIC1750-FHGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=1.8V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFIG	-	AIC1750-FIGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=1.9V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFJG	-	AIC1750-FJGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=2.0V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFKG	-	AIC1750-FKGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=2.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFLG	-	AIC1750-FLGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=2.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFMG	-	AIC1750-FMGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=2.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFNG	-	AIC1750-FNGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=2.4V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFOG	-	AIC1750-FOGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=2.5V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFPG	-	AIC1750-FPGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=2.6V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFQG	-	AIC1750-FQGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=2.7V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFRG	-	AIC1750-FRGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=2.8V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFSG	-	AIC1750-FSGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=2.9V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFTG	-	AIC1750-FTGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=3.0V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFUG	-	AIC1750-FUGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=3.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFVG	-	AIC1750-FVGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=3.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFWG	-	AIC1750-FWGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=3.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYFXG	-	AIC1750-FXGDA	LVR-IC	LDO, Dual out, Vout1=1.6V, Vout2=2.85V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGAG	-	AIC1750-GAGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=1.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGBG	-	AIC1750-GBGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=1.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGCG	-	AIC1750-GCGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=1.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGDG	-	AIC1750-GDGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=1.4V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGEG	-	AIC1750-GEGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=1.5V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGFG	-	AIC1750-GFGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=1.6V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGGG	-	AIC1750-GGGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=1.7V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGHG	-	AIC1750-GHGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=1.8V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGIG	-	AIC1750-GIGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=1.9V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGJG	-	AIC1750-GJGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=2.0V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGKG	-	AIC1750-GKGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=2.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGLG	-	AIC1750-GLGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=2.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGMG	-	AIC1750-GMGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=2.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGNG	-	AIC1750-GNGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=2.4V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGOG	-	AIC1750-GOGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=2.5V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGPG	-	AIC1750-GPGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=2.6V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGQG	-	AIC1750-GQGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=2.7V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGRG	-	AIC1750-GRGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=2.8V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGSG	-	AIC1750-GSGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=2.9V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGTG	-	AIC1750-GTGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=3.0V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGUG	-	AIC1750-GUGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=3.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGVG	-	AIC1750-GVGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=3.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGWG	-	AIC1750-GWGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=3.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYGXG	-	AIC1750-GXGDA	LVR-IC	LDO, Dual out, Vout1=1.7V, Vout2=2.85V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYH	-	XC9235G3HD0R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CYH	-	XC9235G3HD4R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CYH	-	XC9235G3HDER-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CYHAG	-	AIC1750-HAGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=1.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHBG	-	AIC1750-HBGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=1.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHCG	-	AIC1750-HCGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=1.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHDG	-	AIC1750-HDGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=1.4V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHEG	-	AIC1750-HEGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=1.5V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHFG	-	AIC1750-HFGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=1.6V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CYHGG	-	AIC1750-HGGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=1.7V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHHG	-	AIC1750-HHGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=1.8V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHIG	-	AIC1750-HIGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=1.9V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHJG	-	AIC1750-HJGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=2.0V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHKG	-	AIC1750-HKGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=2.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHLG	-	AIC1750-HLGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=2.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHMG	-	AIC1750-HMGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=2.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHNG	-	AIC1750-HNGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=2.4V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHOG	-	AIC1750-HOGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=2.5V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHPG	-	AIC1750-HPGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=2.6V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHQG	-	AIC1750-HQGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=2.7V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHRG	-	AIC1750-HRGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=2.8V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHSG	-	AIC1750-HSGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=2.9V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHTG	-	AIC1750-HTGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=3.0V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHUG	-	AIC1750-HUGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=3.1V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHVG	-	AIC1750-HVGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=3.2V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHWG	-	AIC1750-HWGDA	LVR-IC	LDO, Dual out, Vout1=1.8V, Vout2=3.3V, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYHXG	-	AIC1750-HXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIAG	-	AIC1750-IAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIBG	-	AIC1750-IBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYICG	-	AIC1750-ICGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIDG	-	AIC1750-IDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIEG	-	AIC1750-IEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIFG	-	AIC1750-IFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIGG	-	AIC1750-IGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIHG	-	AIC1750-IHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIIG	-	AIC1750-IIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIJG	-	AIC1750-IJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIKG	-	AIC1750-IKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYILG	-	AIC1750-ILGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIMG	-	AIC1750-IMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYING	-	AIC1750-INGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIOG	-	AIC1750-IOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIPG	-	AIC1750-IPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIQG	-	AIC1750-IQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIRG	-	AIC1750-IRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYISG	-	AIC1750-ISGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYITG	-	AIC1750-ITGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIUG	-	AIC1750-IUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIVG	-	AIC1750-IVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIWG	-	AIC1750-IWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYIXG	-	AIC1750-IXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJAG	-	AIC1750-JAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJBG	-	AIC1750-JBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJCG	-	AIC1750-JCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJDG	-	AIC1750-JDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJEG	-	AIC1750-JEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJFG	-	AIC1750-JFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJGG	-	AIC1750-JGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJHG	-	AIC1750-JHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJIG	-	AIC1750-JIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJJG	-	AIC1750-JJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJKG	-	AIC1750-JKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJLG	-	AIC1750-JLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJMG	-	AIC1750-JMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJNG	-	AIC1750-JNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJOG	-	AIC1750-JOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJPG	-	AIC1750-JPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJQG	-	AIC1750-JQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJRG	-	AIC1750-JRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJSG	-	AIC1750-JSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJTG	-	AIC1750-JTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJUG	-	AIC1750-JUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJVG	-	AIC1750-JVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJWG	-	AIC1750-JWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYJXG	-	AIC1750-JXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYK	-	XC9235G3KD0R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CYK	-	XC9235G3KD4R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CYK	-	XC9235G3KDER-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CYKAG	-	AIC1750-KAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CYKBG	-	AIC1750-KBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKCG	-	AIC1750-KCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKDG	-	AIC1750-KDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKEG	-	AIC1750-KEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKFG	-	AIC1750-KFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKGG	-	AIC1750-KGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKHG	-	AIC1750-KHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKIG	-	AIC1750-KIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKJG	-	AIC1750-KJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKKG	-	AIC1750-KKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKLG	-	AIC1750-KLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKMG	-	AIC1750-KMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKNG	-	AIC1750-KNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKOG	-	AIC1750-KOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKPG	-	AIC1750-KPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKQG	-	AIC1750-KQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKRG	-	AIC1750-KRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKSG	-	AIC1750-KSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKTG	-	AIC1750-KTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKUG	-	AIC1750-KUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKVG	-	AIC1750-KVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKWG	-	AIC1750-KWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYKXG	-	AIC1750-KXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYL	-	XC9235G3LD0R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CYL	-	XC9235G3LD4R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CYL	-	XC9235G3LDER-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CYLAG	-	AIC1750-LAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLBG	-	AIC1750-LBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLCG	-	AIC1750-LCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLDG	-	AIC1750-LDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLEG	-	AIC1750-LEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLFG	-	AIC1750-LFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLGG	-	AIC1750-LGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLHG	-	AIC1750-LHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLIG	-	AIC1750-LIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLJG	-	AIC1750-LJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLKG	-	AIC1750-LKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLLG	-	AIC1750-LLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLMG	-	AIC1750-LMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLNG	-	AIC1750-LNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLOG	-	AIC1750-LOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLPG	-	AIC1750-LPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLQG	-	AIC1750-LQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLRG	-	AIC1750-LRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLSG	-	AIC1750-LSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLTG	-	AIC1750-LTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLUG	-	AIC1750-LUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLVG	-	AIC1750-LVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLWG	-	AIC1750-LWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYLXG	-	AIC1750-LXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYM	-	XC9235G3MD0R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CYM	-	XC9235G3MD4R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CYM	-	XC9235G3MDER-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CYMAG	-	AIC1750-MAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMBG	-	AIC1750-MBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMCG	-	AIC1750-MCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMDG	-	AIC1750-MDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMEG	-	AIC1750-MEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMFG	-	AIC1750-MFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMGG	-	AIC1750-MGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMHG	-	AIC1750-MHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMIG	-	AIC1750-MIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMJG	-	AIC1750-MJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMKG	-	AIC1750-MKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMLG	-	AIC1750-MLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMMG	-	AIC1750-MMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMNG	-	AIC1750-MNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMOG	-	AIC1750-MOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMPG	-	AIC1750-MPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMQG	-	AIC1750-MQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CYMRG	-	AIC1750-MRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMSG	-	AIC1750-MSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMTG	-	AIC1750-MTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMUG	-	AIC1750-MUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMVG	-	AIC1750-MVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMWG	-	AIC1750-MWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYMXG	-	AIC1750-MXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNAG	-	AIC1750-NAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNBG	-	AIC1750-NBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNCG	-	AIC1750-NCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNDG	-	AIC1750-NDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNEG	-	AIC1750-NEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNFG	-	AIC1750-NFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNGG	-	AIC1750-NGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNHG	-	AIC1750-NHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNIG	-	AIC1750-NIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNJG	-	AIC1750-NJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNKG	-	AIC1750-NKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNLG	-	AIC1750-NLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNMG	-	AIC1750-NMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNNG	-	AIC1750-NNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNOG	-	AIC1750-NOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNPG	-	AIC1750-NPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNQG	-	AIC1750-NQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNRG	-	AIC1750-NRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNSG	-	AIC1750-NSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNTG	-	AIC1750-NTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNUG	-	AIC1750-NUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNVG	-	AIC1750-NVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNWG	-	AIC1750-NWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYNXG	-	AIC1750-NXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOAG	-	AIC1750-OAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOBG	-	AIC1750-OBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOCG	-	AIC1750-OCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYODG	-	AIC1750-ODGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOEG	-	AIC1750-OEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOFG	-	AIC1750-OFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOGG	-	AIC1750-OGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOHG	-	AIC1750-OHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOIG	-	AIC1750-OIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOJG	-	AIC1750-OJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOKG	-	AIC1750-OKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOLG	-	AIC1750-OLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOMG	-	AIC1750-OMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYONG	-	AIC1750-ONGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOOG	-	AIC1750-OOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOPG	-	AIC1750-OPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOQG	-	AIC1750-OQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYORG	-	AIC1750-ORGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOSG	-	AIC1750-OSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOTG	-	AIC1750-OTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOUG	-	AIC1750-OUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOVG	-	AIC1750-OVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOWG	-	AIC1750-OWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYOXG	-	AIC1750-OXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPAG	-	AIC1750-PAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPBG	-	AIC1750-PBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPCG	-	AIC1750-PCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPDG	-	AIC1750-PDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPEG	-	AIC1750-PEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPFG	-	AIC1750-PFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPGG	-	AIC1750-PGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPHG	-	AIC1750-PHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPIG	-	AIC1750-PIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPJG	-	AIC1750-PJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPKG	-	AIC1750-PKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPLG	-	AIC1750-PLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPMG	-	AIC1750-PMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPNG	-	AIC1750-PNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPOG	-	AIC1750-POGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CYPPG	-	AIC1750-PPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPQG	-	AIC1750-PQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPRG	-	AIC1750-PRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPSG	-	AIC1750-PSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPTG	-	AIC1750-PTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPUG	-	AIC1750-PUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPVG	-	AIC1750-PVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPWG	-	AIC1750-PWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYPXG	-	AIC1750-PXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQAG	-	AIC1750-QAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQBG	-	AIC1750-QBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQCG	-	AIC1750-QCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQDG	-	AIC1750-QDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQEG	-	AIC1750-QEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQFG	-	AIC1750-QFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQGG	-	AIC1750-QGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQHG	-	AIC1750-QHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQIG	-	AIC1750-QIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQJG	-	AIC1750-QJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQKG	-	AIC1750-QKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQLG	-	AIC1750-QLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQMG	-	AIC1750-QMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQNG	-	AIC1750-QNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQOG	-	AIC1750-QOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQPG	-	AIC1750-QPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQQG	-	AIC1750-QQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQRG	-	AIC1750-QRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQSG	-	AIC1750-QSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQTG	-	AIC1750-QTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQUG	-	AIC1750-QUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQVG	-	AIC1750-QVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQWG	-	AIC1750-QWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYQXG	-	AIC1750-QXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRAG	-	AIC1750-RAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRBG	-	AIC1750-RBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRCG	-	AIC1750-RCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRDG	-	AIC1750-RDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYREG	-	AIC1750-REGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRFG	-	AIC1750-RFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRGG	-	AIC1750-RGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRHG	-	AIC1750-RHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRIG	-	AIC1750-RIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRJG	-	AIC1750-RJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRKG	-	AIC1750-RKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRLG	-	AIC1750-RLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRMG	-	AIC1750-RMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRNG	-	AIC1750-RNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYROG	-	AIC1750-ROGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRPG	-	AIC1750-RPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRQG	-	AIC1750-RQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRRG	-	AIC1750-RRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRSG	-	AIC1750-RSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRTG	-	AIC1750-RTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRUG	-	AIC1750-RUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRVG	-	AIC1750-RVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRWG	-	AIC1750-RWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYRXG	-	AIC1750-RXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSAG	-	AIC1750-SAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSBG	-	AIC1750-SBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSCG	-	AIC1750-SCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSDG	-	AIC1750-SDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSEG	-	AIC1750-SEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSFG	-	AIC1750-SFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSGG	-	AIC1750-SGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSHG	-	AIC1750-SHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSIG	-	AIC1750-SIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSJG	-	AIC1750-SJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSKG	-	AIC1750-SKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSLG	-	AIC1750-SLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSMG	-	AIC1750-SMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CYSNG	-	AIC1750-SNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSOG	-	AIC1750-SOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSPG	-	AIC1750-SPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSQG	-	AIC1750-SQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSRG	-	AIC1750-SRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSSG	-	AIC1750-SSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSTG	-	AIC1750-STGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSUG	-	AIC1750-SUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSVG	-	AIC1750-SVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSWG	-	AIC1750-SWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYSXG	-	AIC1750-SXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTAG	-	AIC1750-TAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTBG	-	AIC1750-TBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTCG	-	AIC1750-TCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTDG	-	AIC1750-TDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTEG	-	AIC1750-TEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTFG	-	AIC1750-TFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTGG	-	AIC1750-TGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTHG	-	AIC1750-THGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTIG	-	AIC1750-TIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTJG	-	AIC1750-TJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTKG	-	AIC1750-TKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTLG	-	AIC1750-TLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTMG	-	AIC1750-TMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTNG	-	AIC1750-TNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTOG	-	AIC1750-TOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTPG	-	AIC1750-TPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTQG	-	AIC1750-TQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTRG	-	AIC1750-TRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTSG	-	AIC1750-TSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTTG	-	AIC1750-TTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTUG	-	AIC1750-TUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTVG	-	AIC1750-TVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTWG	-	AIC1750-TWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYTXG	-	AIC1750-TXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUAG	-	AIC1750-UAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUBG	-	AIC1750-UBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUCG	-	AIC1750-UCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUDG	-	AIC1750-UDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUEG	-	AIC1750-UEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUFG	-	AIC1750-UFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUGG	-	AIC1750-UGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUHG	-	AIC1750-UHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUIG	-	AIC1750-UIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUJG	-	AIC1750-UJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUKG	-	AIC1750-UKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYULG	-	AIC1750-ULGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUMG	-	AIC1750-UMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUNG	-	AIC1750-UNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUOG	-	AIC1750-UOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUPG	-	AIC1750-UPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUQG	-	AIC1750-UQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYURG	-	AIC1750-URGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUSG	-	AIC1750-USGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUTG	-	AIC1750-UTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUUG	-	AIC1750-UUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUVG	-	AIC1750-UVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUWG	-	AIC1750-UWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYUXG	-	AIC1750-UXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVAG	-	AIC1750-VAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVBG	-	AIC1750-VBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVCG	-	AIC1750-VCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVDG	-	AIC1750-VDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVEG	-	AIC1750-VEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVFG	-	AIC1750-VFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVGG	-	AIC1750-VGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVHG	-	AIC1750-VHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVIG	-	AIC1750-VIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVJG	-	AIC1750-VJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVKG	-	AIC1750-VKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CYVLG	-	AIC1750-VLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVMG	-	AIC1750-VMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVNG	-	AIC1750-VNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVOG	-	AIC1750-VOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVPG	-	AIC1750-VPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVQG	-	AIC1750-VQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVRG	-	AIC1750-VRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVSG	-	AIC1750-VSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVTG	-	AIC1750-VTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVUG	-	AIC1750-VUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVVG	-	AIC1750-VVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVWG	-	AIC1750-VWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYVXG	-	AIC1750-VXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWAG	-	AIC1750-WAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWBG	-	AIC1750-WBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWCG	-	AIC1750-WCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWDG	-	AIC1750-WDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWEG	-	AIC1750-WEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWFG	-	AIC1750-WFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWGG	-	AIC1750-WGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWHG	-	AIC1750-WHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWIG	-	AIC1750-WIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWJG	-	AIC1750-WJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWKG	-	AIC1750-WKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWLG	-	AIC1750-WLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWMG	-	AIC1750-WMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWNG	-	AIC1750-WNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWOG	-	AIC1750-WOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWPG	-	AIC1750-WPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWQG	-	AIC1750-WQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWRG	-	AIC1750-WRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWSG	-	AIC1750-WSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWTG	-	AIC1750-WTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWUG	-	AIC1750-WUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWVG	-	AIC1750-WVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWWG	-	AIC1750-WWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYWXG	-	AIC1750-WXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXAG	-	AIC1750-XAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXBG	-	AIC1750-XBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXCG	-	AIC1750-XCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXDG	-	AIC1750-XDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXEG	-	AIC1750-XEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXFG	-	AIC1750-XFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXGG	-	AIC1750-XGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXHG	-	AIC1750-XHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXIG	-	AIC1750-XIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXJG	-	AIC1750-XJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXKG	-	AIC1750-XKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXLG	-	AIC1750-XLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXMG	-	AIC1750-XMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXNG	-	AIC1750-XNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXOG	-	AIC1750-XOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXPG	-	AIC1750-XPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXQG	-	AIC1750-XQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXRG	-	AIC1750-XRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXSG	-	AIC1750-XSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXTG	-	AIC1750-XTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXUG	-	AIC1750-XUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXVG	-	AIC1750-XVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXWG	-	AIC1750-XWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CYXXG	-	AIC1750-XXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 150mA, +CE	DFN-6L	56xv	VR19	9c	Aic
CZ	-	R3134K32EA	Vdet-IC	3.2V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
CZ	-	XC6221B30B7R	LVR-IC	LDO, 3.05V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
CZ	-	XC6223E39B9R-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
CZ0	-	XC9235G40D0R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
CZ0	-	XC9235G40D4R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
CZ0	-	XC9235G40DER-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
CZ08	-	RP504L081D	DC-DC-IC	PWM/VFM st-dwn, 0.8V±18mV, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ09	-	RP504L091D	DC-DC-IC	PWM/VFM st-dwn, 0.9V±18mV, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ10	-	RP504L101D	DC-DC-IC	PWM/VFM st-dwn, 1.0V±18mV, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
CZ11	-	RP504L111D	DC-DC-IC	PWM/VFM st-dwn, 1.1V±18mV, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ12	-	RP504L121D	DC-DC-IC	PWM/VFM st-dwn, 1.2V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ13	-	RP504L131D	DC-DC-IC	PWM/VFM st-dwn, 1.3V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ14	-	RP504L141D	DC-DC-IC	PWM/VFM st-dwn, 1.4V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ15	-	RP504L151D	DC-DC-IC	PWM/VFM st-dwn, 1.5V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ16	-	RP504L161D	DC-DC-IC	PWM/VFM st-dwn, 1.6V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ17	-	RP504L171D	DC-DC-IC	PWM/VFM st-dwn, 1.7V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ18	-	RP504L181D	DC-DC-IC	PWM/VFM st-dwn, 1.8V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ19	-	RP504L191D	DC-DC-IC	PWM/VFM st-dwn, 1.9V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ20	-	RP504L201D	DC-DC-IC	PWM/VFM st-dwn, 2.0V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ21	-	RP504L211D	DC-DC-IC	PWM/VFM st-dwn, 2.1V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ22	-	RP504L221D	DC-DC-IC	PWM/VFM st-dwn, 2.2V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ23	-	RP504L231D	DC-DC-IC	PWM/VFM st-dwn, 2.3V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ24	-	RP504L241D	DC-DC-IC	PWM/VFM st-dwn, 2.4V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ25	-	RP504L251D	DC-DC-IC	PWM/VFM st-dwn, 2.5V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ26	-	RP504L261D	DC-DC-IC	PWM/VFM st-dwn, 2.6V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ27	-	RP504L271D	DC-DC-IC	PWM/VFM st-dwn, 2.7V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ28	-	RP504L281D	DC-DC-IC	PWM/VFM st-dwn, 2.8V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ29	-	RP504L291D	DC-DC-IC	PWM/VFM st-dwn, 2.9V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ30	-	RP504L301D	DC-DC-IC	PWM/VFM st-dwn, 3.0V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ31	-	RP504L311D	DC-DC-IC	PWM/VFM st-dwn, 3.1V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ32	-	RP504L321D	DC-DC-IC	PWM/VFM st-dwn, 3.2V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
CZ33	-	RP504L331D	DC-DC-IC	PWM/VFM st-dwn, 3.3V±1.5%, 600mA, 2.25MHz, +CE, CL, Mode	DFN1616-6B	79e4	DC8	9b	Ric
D	-	CET3906E	Si-pnp	DC/DC-Drv, 60V, 200mA, 250mW, B=100..150, 300MHz	SOT-883L	22ta	-	9m	Cen
d0	-	EUA2012H	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x2.7W(5V/4Ω), shutdown	BGA-16	39	AFP46	9a	Eut
D0	-	R3118K361A	Vdet-IC	3.6V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
D0	-	RP109L181B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
D0	-	XC6221A3117R	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
D0	-	XC6GC3002HR	Vdet-IC	3.0V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
D0	-	XC9245A08C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.8V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
D001	-	R5325K001B	LVR-IC	LDO, Dual out, V1=2V±1%, V2=2V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D002	-	R5325K002B	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=2.8V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D003	-	R5325K003B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=3V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D004	-	R5325K004B	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=3V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D005	-	R5325K005B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=2.5V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D006	-	R5325K006B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=3.3V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D007	-	R5325K007B	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=2.8V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D008	-	R5325K008B	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=1.2V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D009	-	R5325K009B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=1.6V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D00A	-	RP506K121A5	DC-DC-IC	PWM/VFM step-down, 1.25V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D00B	-	RP506K121B5	DC-DC-IC	PWM/VFM step-down, 1.25V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D00C	-	RP506K0001C	DC-DC-IC	PWM/VFM step-down, adjustable 0.6V..3.3V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D00D	-	RP506K121D5	DC-DC-IC	PWM/VFM step-down, 1.25V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D00E	-	RP506K121E5	DC-DC-IC	PWM/VFM step-down, 1.25V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D00F	-	RP506K001F	DC-DC-IC	PWM/VFM step-down,, adjustable 0.6V..3.3V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D010	-	R5325K010B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=2.8V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D011	-	R5325K011B	LVR-IC	LDO, Dual out, V1=3V±1%, V2=3V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D012	-	R5325K012B	LVR-IC	LDO, Dual out, V1=3.1V±1%, V2=3.1V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D013	-	R5325K013B	LVR-IC	LDO, Dual out, V1=2.7V±1%, V2=1.8V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D014	-	R5325K014B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=2.6V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D015	-	R5325K015B	LVR-IC	LDO, Dual out, V1=3.3V±1%, V2=3.3V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D016	-	R5325K016B	LVR-IC	LDO, Dual out, V1=2.85V±1%, V2=2.85V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D017	-	R5325K017B	LVR-IC	LDO, Dual out, V1=2.9V±1%, V2=2.9V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D018	-	R5325K018B	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=2.6V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D019	-	R5325K019B	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=2.9V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D020	-	R5325K020B	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=1.8V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D021	-	R5325K021B	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=1.2V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D022	-	R5325K022B	LVR-IC	LDO, Dual out, V1=2.7V±1%, V2=2.85V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D023	-	R5325K023B	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=2.8V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D024	-	R5325K024B	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=3V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D025	-	R5325K025B	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=2.9V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D026	-	R5325K026B	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=2.7V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D027	-	R5325K027B	LVR-IC	LDO, Dual out, V1=2.9V±1%, V2=1.8V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D028	-	R5325K028B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=1.8V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D029	-	R5325K029B	LVR-IC	LDO, Dual out, V1=3.3V±1%, V2=3.3V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D03	-	MD4103C	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 3W(5V/3Ω), shutdown	BGA-9	39	AFP45	9d	Mep
D03	-	XC61GC3002HR	Vdet-IC	3.0V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
D030	-	R5325K030B	LVR-IC	LDO, Dual out, V1=3.45V±1%, V2=2.3V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D031	-	R5325K031B	LVR-IC	LDO, Dual out, V1=1.3V±1%, V2=1.8V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D032	-	R5325K032B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=1.8V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D033	-	R5325K033B	LVR-IC	LDO, Dual out, V1=3.1V±1%, V2=3.0V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D034	-	R5325K034B	LVR-IC	LDO, Dual out, V1=2.95V±1%, V2=2.75V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D035	-	R5325K035B	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=2.85V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
D06D	-	RP506K061D	DC-DC-IC	PWM/VFM step-down, 0.6V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D06E	-	RP506K061E	DC-DC-IC	PWM/VFM step-down, 0.6V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D07D	-	RP506K071D	DC-DC-IC	PWM/VFM step-down, 0.7V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D07E	-	RP506K071E	DC-DC-IC	PWM/VFM step-down, 0.7V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D0808X	-	VRD0808LLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0809X	-	VRD0809LLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D080JX	-	VRD080JLLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D080KX	-	VRD080KLLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0810X	-	VRD0810LLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0811X	-	VRD0811LLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0812X	-	VRD0812LLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0813X	-	VRD0813LLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0814X	-	VRD0814LLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0815X	-	VRD0815LLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0816X	-	VRD0816LLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0817X	-	VRD0817LLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0818X	-	VRD0818LLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0819X	-	VRD0819LLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D081AX	-	VRD081ALLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D081BX	-	VRD081BLLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D081CX	-	VRD081CLLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D081DX	-	VRD081DLLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D081EX	-	VRD081ELLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D081FX	-	VRD081FLLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D081GX	-	VRD081GLLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D081HX	-	VRD081HLLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D081JX	-	VRD081JLLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D081KX	-	VRD081KMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0820X	-	VRD0820MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0821X	-	VRD0821MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0822X	-	VRD0822MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0823X	-	VRD0823MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0824X	-	VRD0824MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0825X	-	VRD0825MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0826X	-	VRD0826MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0827X	-	VRD0827MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0828X	-	VRD0828MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0829X	-	VRD0829MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D082AX	-	VRD082AMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D082BX	-	VRD082BMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D082CX	-	VRD082CMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D082DX	-	VRD082DMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D082EX	-	VRD082EMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D082FX	-	VRD082FMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D082GX	-	VRD082GMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D082HX	-	VRD082HMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D082JX	-	VRD082JMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D082KX	-	VRD082KMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0830X	-	VRD0830MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0831X	-	VRD0831MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0832X	-	VRD0832MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0833X	-	VRD0833MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0834X	-	VRD0834MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0835X	-	VRD0835MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0836X	-	VRD0836MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0837X	-	VRD0837MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0838X	-	VRD0838MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0839X	-	VRD0839MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D083AX	-	VRD083AMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D083BX	-	VRD083BMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D083CX	-	VRD083CMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D083DX	-	VRD083DMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D083EX	-	VRD083EMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D083FX	-	VRD083FMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D083GX	-	VRD083GMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D083HX	-	VRD083HMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D083JX	-	VRD083JMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D083KX	-	VRD083KMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0840X	-	VRD0840MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0841X	-	VRD0841MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0842X	-	VRD0842MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0843X	-	VRD0843MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0844X	-	VRD0844MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0845X	-	VRD0845MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0846X	-	VRD0846MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0847X	-	VRD0847MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0848X	-	VRD0848MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0849X	-	VRD0849MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D084AX	-	VRD084AMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D084BX	-	VRD084BMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D084CX	-	VRD084CMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D084DX	-	VRD084DMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D084EX	-	VRD084EMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D084FX	-	VRD084FMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D084GX	-	VRD084GMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D084HX	-	VRD084HMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D084JX	-	VRD084JMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D084KX	-	VRD084KMLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0850X	-	VRD0850MLX	LVR-IC	LDO, Dual out, Vo1=0.8V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D08A	-	RP506K081A	DC-DC-IC	PWM/VFM step-down, 0.8V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D08B	-	RP506K081B	DC-DC-IC	PWM/VFM step-down, 0.8V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D08D	-	RP506K081D	DC-DC-IC	PWM/VFM step-down, 0.8V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D08E	-	RP506K081E	DC-DC-IC	PWM/VFM step-down, 0.8V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D0908X	-	VRD0908LLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0909X	-	VRD0909LLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D090JX	-	VRD090JLLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D090KX	-	VRD090KLLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0910X	-	VRD0910LLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0911X	-	VRD0911LLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0912X	-	VRD0912LLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0913X	-	VRD0913LLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0914X	-	VRD0914LLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0915X	-	VRD0915LLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0916X	-	VRD0916LLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0917X	-	VRD0917LLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0918X	-	VRD0918LLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0919X	-	VRD0919LLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D091AX	-	VRD091ALLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D091BX	-	VRD091BLLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D091CX	-	VRD091CLLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D091DX	-	VRD091DLLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D091EX	-	VRD091ELLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D091FX	-	VRD091FLLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D091GX	-	VRD091GLLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D091HX	-	VRD091HLLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D091JX	-	VRD091JLLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D091KX	-	VRD091KMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0920X	-	VRD0920MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0921X	-	VRD0921MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0922X	-	VRD0922MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0923X	-	VRD0923MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0924X	-	VRD0924MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0925X	-	VRD0925MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0926X	-	VRD0926MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0927X	-	VRD0927MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0928X	-	VRD0928MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0929X	-	VRD0929MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D092AX	-	VRD092AMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D092BX	-	VRD092BMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D092CX	-	VRD092CMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D092DX	-	VRD092DMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D092EX	-	VRD092EMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D092FX	-	VRD092FMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D092GX	-	VRD092GMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D092HX	-	VRD092HMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D092JX	-	VRD092JMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D092KX	-	VRD092KMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D0930X	-	VRD0930MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0931X	-	VRD0931MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0932X	-	VRD0932MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0933X	-	VRD0933MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0934X	-	VRD0934MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0935X	-	VRD0935MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0936X	-	VRD0936MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0937X	-	VRD0937MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0938X	-	VRD0938MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0939X	-	VRD0939MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D093AX	-	VRD093AMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D093BX	-	VRD093BMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D093CX	-	VRD093CMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D093DX	-	VRD093DMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D093EX	-	VRD093EMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D093FX	-	VRD093FMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D093GX	-	VRD093GMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D093HX	-	VRD093HMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D093JX	-	VRD093JMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D093KX	-	VRD093KMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0940X	-	VRD0940MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0941X	-	VRD0941MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0942X	-	VRD0942MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0943X	-	VRD0943MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0944X	-	VRD0944MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0945X	-	VRD0945MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0946X	-	VRD0946MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0947X	-	VRD0947MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0948X	-	VRD0948MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0949X	-	VRD0949MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D094AX	-	VRD094AMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D094BX	-	VRD094BMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D094CX	-	VRD094CMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D094DX	-	VRD094DMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D094EX	-	VRD094EMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D094FX	-	VRD094FMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D094GX	-	VRD094GMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D094HX	-	VRD094HMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D094JX	-	VRD094JMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D094KX	-	VRD094KMLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0950X	-	VRD0950MLX	LVR-IC	LDO, Dual out, Vo1=0.9V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D09A	-	RP506K091A	DC-DC-IC	PWM/VFM step-down, 0.9V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D09B	-	RP506K091B	DC-DC-IC	PWM/VFM step-down, 0.9V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D09D	-	RP506K091D	DC-DC-IC	PWM/VFM step-down, 0.9V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D09E	-	RP506K091E	DC-DC-IC	PWM/VFM step-down, 0.9V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D0A	-	XC6108C30AGR	Vdet-IC	3.0V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D0B	-	XC6108C30BGR	Vdet-IC	3.0V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D0C	-	XC6108C30CGR	Vdet-IC	3.0V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D0D	-	XC6108C30DGR	Vdet-IC	3.0V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D0J08X	-	VRD0J08LLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J09X	-	VRD0J09LLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J0JX	-	VRD0J0JLLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J0KX	-	VRD0J0KLLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J10X	-	VRD0J10LLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J11X	-	VRD0J11LLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J12X	-	VRD0J12LLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J13X	-	VRD0J13LLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J14X	-	VRD0J14LLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J15X	-	VRD0J15LLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J16X	-	VRD0J16LLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J17X	-	VRD0J17LLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J18X	-	VRD0J18LLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J19X	-	VRD0J19LLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J1AX	-	VRD0J1ALLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J1BX	-	VRD0J1BLLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J1CX	-	VRD0J1CLLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J1DX	-	VRD0J1DLLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J1EX	-	VRD0J1ELLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J1FX	-	VRD0J1FLLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J1GX	-	VRD0J1GLLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D0J1HX	-	VRD0J1HLLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J1JX	-	VRD0J1JLLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J1KX	-	VRD0J1KMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J20X	-	VRD0J20MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J21X	-	VRD0J21MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J22X	-	VRD0J22MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J23X	-	VRD0J23MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J24X	-	VRD0J24MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J25X	-	VRD0J25MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J26X	-	VRD0J26MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J27X	-	VRD0J27MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J28X	-	VRD0J28MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J29X	-	VRD0J29MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J2AX	-	VRD0J2AMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J2BX	-	VRD0J2BMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J2CX	-	VRD0J2CMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J2DX	-	VRD0J2DMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J2EX	-	VRD0J2EMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J2FX	-	VRD0J2FMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J2GX	-	VRD0J2GMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J2HX	-	VRD0J2HMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J2JX	-	VRD0J2JMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J2KX	-	VRD0J2KMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J30X	-	VRD0J30MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J31X	-	VRD0J31MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J32X	-	VRD0J32MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J33X	-	VRD0J33MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J34X	-	VRD0J34MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J35X	-	VRD0J35MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J36X	-	VRD0J36MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J37X	-	VRD0J37MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J38X	-	VRD0J38MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J39X	-	VRD0J39MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J3AX	-	VRD0J3AMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J3BX	-	VRD0J3BMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J3CX	-	VRD0J3CMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J3DX	-	VRD0J3DMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J3EX	-	VRD0J3EMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J3FX	-	VRD0J3FMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J3GX	-	VRD0J3GMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J3HX	-	VRD0J3HMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J3JX	-	VRD0J3JMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J3KX	-	VRD0J3KMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J40X	-	VRD0J40MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J41X	-	VRD0J41MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J42X	-	VRD0J42MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J43X	-	VRD0J43MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J44X	-	VRD0J44MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J45X	-	VRD0J45MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J46X	-	VRD0J46MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J47X	-	VRD0J47MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J48X	-	VRD0J48MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J49X	-	VRD0J49MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J4AX	-	VRD0J4AMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J4BX	-	VRD0J4BMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J4CX	-	VRD0J4CMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J4DX	-	VRD0J4DMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J4EX	-	VRD0J4EMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J4FX	-	VRD0J4FMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J4GX	-	VRD0J4GMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J4HX	-	VRD0J4HMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J4JX	-	VRD0J4JMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J4KX	-	VRD0J4KMLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0J50X	-	VRD0J50MLX	LVR-IC	LDO, Dual out, Vo1=0.85V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K08X	-	VRD0K08LLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K09X	-	VRD0K09LLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K0JX	-	VRD0K0JLLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K0KX	-	VRD0K0KLLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K10X	-	VRD0K10LLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K11X	-	VRD0K11LLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D0K12X	-	VRD0K12LLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K13X	-	VRD0K13LLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K14X	-	VRD0K14LLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K15X	-	VRD0K15LLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K16X	-	VRD0K16LLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K17X	-	VRD0K17LLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K18X	-	VRD0K18LLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K19X	-	VRD0K19LLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K1AX	-	VRD0K1ALLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K1BX	-	VRD0K1BLLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K1CX	-	VRD0K1CLLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K1DX	-	VRD0K1DLLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K1EX	-	VRD0K1ELLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K1FX	-	VRD0K1FLLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K1GX	-	VRD0K1GLLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K1HX	-	VRD0K1HLLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K1JX	-	VRD0K1JLLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K1KX	-	VRD0K1KMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K20X	-	VRD0K20MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K21X	-	VRD0K21MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K22X	-	VRD0K22MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K23X	-	VRD0K23MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K24X	-	VRD0K24MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K25X	-	VRD0K25MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K26X	-	VRD0K26MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K27X	-	VRD0K27MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K28X	-	VRD0K28MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K29X	-	VRD0K29MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K2AX	-	VRD0K2AMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K2BX	-	VRD0K2BMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K2CX	-	VRD0K2CMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K2DX	-	VRD0K2DMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K2EX	-	VRD0K2EMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K2FX	-	VRD0K2FMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K2GX	-	VRD0K2GMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K2HX	-	VRD0K2HMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K2JX	-	VRD0K2JMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K2KX	-	VRD0K2KMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K30X	-	VRD0K30MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K31X	-	VRD0K31MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K32X	-	VRD0K32MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K33X	-	VRD0K33MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K34X	-	VRD0K34MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K35X	-	VRD0K35MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K36X	-	VRD0K36MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K37X	-	VRD0K37MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K38X	-	VRD0K38MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K39X	-	VRD0K39MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K3AX	-	VRD0K3AMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K3BX	-	VRD0K3BMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K3CX	-	VRD0K3CMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K3DX	-	VRD0K3DMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K3EX	-	VRD0K3EMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K3FX	-	VRD0K3FMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K3GX	-	VRD0K3GMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K3HX	-	VRD0K3HMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K3JX	-	VRD0K3JMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K3KX	-	VRD0K3KMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K40X	-	VRD0K40MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K41X	-	VRD0K41MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K42X	-	VRD0K42MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K43X	-	VRD0K43MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K44X	-	VRD0K44MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K45X	-	VRD0K45MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K46X	-	VRD0K46MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K47X	-	VRD0K47MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K48X	-	VRD0K48MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K49X	-	VRD0K49MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K4AX	-	VRD0K4AMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K4BX	-	VRD0K4BMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D0K4CX	-	VRD0K4CMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K4DX	-	VRD0K4DMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K4EX	-	VRD0K4EMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K4FX	-	VRD0K4FMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K4GX	-	VRD0K4GMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K4HX	-	VRD0K4HMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K4JX	-	VRD0K4JMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K4KX	-	VRD0K4KMLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D0K50X	-	VRD0K50MLX	LVR-IC	LDO, Dual out, Vo1=0.95V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1	-	BZX884-C16	Z-diode	16V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
D1	-	R3118K371A	Vdet-IC	3.7V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
D1	-	RP109L191B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
D1	-	XC6221A3217R	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
D1	-	XC6GC3102HR	Vdet-IC	3.1V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
D1	-	XC9245A09C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.9V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
D1008X	-	VRD1008LLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1009X	-	VRD1009LLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D100JX	-	VRD100JLLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D100KX	-	VRD100KLLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1010X	-	VRD1010LLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1011X	-	VRD1011LLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1012X	-	VRD1012LLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1013X	-	VRD1013LLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1014X	-	VRD1014LLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1015X	-	VRD1015LLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1016X	-	VRD1016LLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1017X	-	VRD1017LLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1018X	-	VRD1018LLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1019X	-	VRD1019LLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D101AX	-	VRD101ALLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D101BX	-	VRD101BLLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D101CX	-	VRD101CLLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D101DX	-	VRD101DLLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D101EX	-	VRD101ELLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D101FX	-	VRD101FLLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D101GX	-	VRD101GLLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D101HX	-	VRD101HLLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D101JX	-	VRD101JLLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D101KX	-	VRD101KMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1020X	-	VRD1020MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1021X	-	VRD1021MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1022X	-	VRD1022MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1023X	-	VRD1023MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1024X	-	VRD1024MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1025X	-	VRD1025MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1026X	-	VRD1026MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1027X	-	VRD1027MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1028X	-	VRD1028MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1029X	-	VRD1029MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D102AX	-	VRD102AMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D102BX	-	VRD102BMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D102CX	-	VRD102CMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D102DX	-	VRD102DMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D102EX	-	VRD102EMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D102FX	-	VRD102FMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D102GX	-	VRD102GMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D102HX	-	VRD102HMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D102JX	-	VRD102JMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D102KX	-	VRD102KMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1030X	-	VRD1030MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1031X	-	VRD1031MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1032X	-	VRD1032MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1033X	-	VRD1033MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1034X	-	VRD1034MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1035X	-	VRD1035MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1036X	-	VRD1036MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1037X	-	VRD1037MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1038X	-	VRD1038MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1039X	-	VRD1039MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D103AX	-	VRD103AMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D103BX	-	VRD103BMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D103CX	-	VRD103CMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D103DX	-	VRD103DMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D103EX	-	VRD103EMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D103FX	-	VRD103FMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D103GX	-	VRD103GMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D103HX	-	VRD103HMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D103JX	-	VRD103JMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D103KX	-	VRD103KMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1040X	-	VRD1040MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1041X	-	VRD1041MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1042X	-	VRD1042MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1043X	-	VRD1043MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1044X	-	VRD1044MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1045X	-	VRD1045MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1046X	-	VRD1046MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1047X	-	VRD1047MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1048X	-	VRD1048MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1049X	-	VRD1049MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D104AX	-	VRD104AMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D104BX	-	VRD104BMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D104CX	-	VRD104CMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D104DX	-	VRD104DMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D104EX	-	VRD104EMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D104FX	-	VRD104FMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D104GX	-	VRD104GMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D104HX	-	VRD104HMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D104JX	-	VRD104JMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D104KX	-	VRD104KMLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1050X	-	VRD1050MLX	LVR-IC	LDO, Dual out, Vo1=1.0V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D10A	-	RP506K101A	DC-DC-IC	PWM/VFM step-down, 1.0V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D10B	-	RP506K101B	DC-DC-IC	PWM/VFM step-down, 1.0V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D10D	-	RP506K101D	DC-DC-IC	PWM/VFM step-down, 1.0V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D10E	-	RP506K101E	DC-DC-IC	PWM/VFM step-down, 1.0V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D1108X	-	VRD1108LLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1109X	-	VRD1109LLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D110JX	-	VRD110JLLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D110KX	-	VRD110KLLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1110X	-	VRD1110LLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1111X	-	VRD1111LLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1112X	-	VRD1112LLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1113X	-	VRD1113LLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1114X	-	VRD1114LLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1115X	-	VRD1115LLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1116X	-	VRD1116LLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1117X	-	VRD1117LLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1118X	-	VRD1118LLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1119X	-	VRD1119LLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D111AX	-	VRD111ALLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D111BX	-	VRD111BLLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D111CX	-	VRD111CLLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D111DX	-	VRD111DLLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D111EX	-	VRD111ELLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D111FX	-	VRD111FLLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D111GX	-	VRD111GLLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D111HX	-	VRD111HLLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D111JX	-	VRD111JLLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D111KX	-	VRD111KMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1120X	-	VRD1120MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1121X	-	VRD1121MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1122X	-	VRD1122MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1123X	-	VRD1123MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1124X	-	VRD1124MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1125X	-	VRD1125MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1126X	-	VRD1126MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1127X	-	VRD1127MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1128X	-	VRD1128MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1129X	-	VRD1129MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D112AX	-	VRD112AMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D112BX	-	VRD112BMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D112CX	-	VRD112CMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D112DX	-	VRD112DMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D112EX	-	VRD112EMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D112FX	-	VRD112FMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D112GX	-	VRD112GMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D112HX	-	VRD112HMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D112JX	-	VRD112JMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D112KX	-	VRD112KMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1130X	-	VRD1130MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1131X	-	VRD1131MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1132X	-	VRD1132MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1133X	-	VRD1133MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1134X	-	VRD1134MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1135X	-	VRD1135MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1136X	-	VRD1136MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1137X	-	VRD1137MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1138X	-	VRD1138MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1139X	-	VRD1139MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D113AX	-	VRD113AMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D113BX	-	VRD113BMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D113CX	-	VRD113CMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D113DX	-	VRD113DMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D113EX	-	VRD113EMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D113FX	-	VRD113FMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D113GX	-	VRD113GMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D113HX	-	VRD113HMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D113JX	-	VRD113JMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D113KX	-	VRD113KMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1140X	-	VRD1140MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1141X	-	VRD1141MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1142X	-	VRD1142MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1143X	-	VRD1143MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1144X	-	VRD1144MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1145X	-	VRD1145MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1146X	-	VRD1146MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1147X	-	VRD1147MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1148X	-	VRD1148MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1149X	-	VRD1149MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D114AX	-	VRD114AMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D114BX	-	VRD114BMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D114CX	-	VRD114CMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D114DX	-	VRD114DMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D114EX	-	VRD114EMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D114FX	-	VRD114FMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D114GX	-	VRD114GMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D114HX	-	VRD114HMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D114JX	-	VRD114JMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D114KX	-	VRD114KMLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1150X	-	VRD1150MLX	LVR-IC	LDO, Dual out, Vo1=1.1V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D11A	-	RP506K111A	DC-DC-IC	PWM/VFM step-down, 1.1V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D11B	-	RP506K111B	DC-DC-IC	PWM/VFM step-down, 1.1V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D11D	-	RP506K111D	DC-DC-IC	PWM/VFM step-down, 1.1V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D11E	-	RP506K111E	DC-DC-IC	PWM/VFM step-down, 1.1V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D1208X	-	VRD1208LLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1209X	-	VRD1209LLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D120JX	-	VRD120JLLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D120KX	-	VRD120KLLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1210X	-	VRD1210LLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1211X	-	VRD1211LLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1212X	-	VRD1212LLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1213X	-	VRD1213LLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1214X	-	VRD1214LLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1215X	-	VRD1215LLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1216X	-	VRD1216LLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1217X	-	VRD1217LLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1218X	-	VRD1218LLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1219X	-	VRD1219LLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D121AX	-	VRD121ALLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D121BX	-	VRD121BLLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D121CX	-	VRD121CLLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D121DX	-	VRD121DLLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D121EX	-	VRD121ELLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D121FX	-	VRD121FLLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D121GX	-	VRD121GLLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D121HX	-	VRD121HLLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D121JX	-	VRD121JLLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D121KX	-	VRD121KMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1220X	-	VRD1220MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1221X	-	VRD1221MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1222X	-	VRD1222MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1223X	-	VRD1223MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1224X	-	VRD1224MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1225X	-	VRD1225MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1226X	-	VRD1226MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1227X	-	VRD1227MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1228X	-	VRD1228MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1229X	-	VRD1229MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D122AX	-	VRD122AMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D122BX	-	VRD122BMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D122CX	-	VRD122CMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D122DX	-	VRD122DMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D122EX	-	VRD122EMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D122FX	-	VRD122FMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D122GX	-	VRD122GMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D122HX	-	VRD122HMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D122JX	-	VRD122JMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D122KX	-	VRD122KMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1230X	-	VRD1230MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1231X	-	VRD1231MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1232X	-	VRD1232MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1233X	-	VRD1233MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1234X	-	VRD1234MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1235X	-	VRD1235MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1236X	-	VRD1236MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1237X	-	VRD1237MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1238X	-	VRD1238MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1239X	-	VRD1239MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D123AX	-	VRD123AMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D123BX	-	VRD123BMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D123CX	-	VRD123CMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D123DX	-	VRD123DMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D123EX	-	VRD123EMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D123FX	-	VRD123FMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D123GX	-	VRD123GMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D123HX	-	VRD123HMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D123JX	-	VRD123JMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D123KX	-	VRD123KMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1240X	-	VRD1240MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1241X	-	VRD1241MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1242X	-	VRD1242MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1243X	-	VRD1243MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1244X	-	VRD1244MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1245X	-	VRD1245MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1246X	-	VRD1246MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1247X	-	VRD1247MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1248X	-	VRD1248MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1249X	-	VRD1249MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D124AX	-	VRD124AMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D124BX	-	VRD124BMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D124CX	-	VRD124CMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D124DX	-	VRD124DMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D124EX	-	VRD124EMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D124FX	-	VRD124FMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D124GX	-	VRD124GMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D124HX	-	VRD124HMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D124JX	-	VRD124JMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D124KX	-	VRD124KMLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1250X	-	VRD1250MLX	LVR-IC	LDO, Dual out, Vo1=1.2V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D12A	-	RP506K121A	DC-DC-IC	PWM/VFM step-down, 1.2V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D12B	-	RP506K121B	DC-DC-IC	PWM/VFM step-down, 1.2V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D12D	-	RP506K121D	DC-DC-IC	PWM/VFM step-down, 1.2V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D12E	-	RP506K121E	DC-DC-IC	PWM/VFM step-down, 1.2V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D13	-	XC61GC3102HR	Vdet-IC	3.1V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
D1308X	-	VRD1308LLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1309X	-	VRD1309LLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D130JX	-	VRD130JLLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D130KX	-	VRD130KLLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1310X	-	VRD1310LLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1311X	-	VRD1311LLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1312X	-	VRD1312LLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1313X	-	VRD1313LLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1314X	-	VRD1314LLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1315X	-	VRD1315LLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1316X	-	VRD1316LLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1317X	-	VRD1317LLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1318X	-	VRD1318LLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1319X	-	VRD1319LLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D131AX	-	VRD131ALLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D131BX	-	VRD131BLLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D131CX	-	VRD131CLLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D131DX	-	VRD131DLLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D131EX	-	VRD131ELLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D131FX	-	VRD131FLLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D131GX	-	VRD131GLLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D131HX	-	VRD131HLLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D131JX	-	VRD131JLLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D131KX	-	VRD131KMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1320X	-	VRD1320MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1321X	-	VRD1321MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1322X	-	VRD1322MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1323X	-	VRD1323MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1324X	-	VRD1324MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1325X	-	VRD1325MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1326X	-	VRD1326MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1327X	-	VRD1327MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1328X	-	VRD1328MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1329X	-	VRD1329MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D132AX	-	VRD132AMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D132BX	-	VRD132BMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D132CX	-	VRD132CMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D132DX	-	VRD132DMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D132EX	-	VRD132EMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D132FX	-	VRD132FMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D132GX	-	VRD132GMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D132HX	-	VRD132HMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D132JX	-	VRD132JMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D132KX	-	VRD132KMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1330X	-	VRD1330MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1331X	-	VRD1331MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1332X	-	VRD1332MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1333X	-	VRD1333MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1334X	-	VRD1334MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1335X	-	VRD1335MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1336X	-	VRD1336MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1337X	-	VRD1337MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1338X	-	VRD1338MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1339X	-	VRD1339MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D133AX	-	VRD133AMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D133BX	-	VRD133BMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D133CX	-	VRD133CMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D133DX	-	VRD133DMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D133EX	-	VRD133EMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D133FX	-	VRD133FMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D133GX	-	VRD133GMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D133HX	-	VRD133HMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D133JX	-	VRD133JMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D133KX	-	VRD133KMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1340X	-	VRD1340MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1341X	-	VRD1341MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1342X	-	VRD1342MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1343X	-	VRD1343MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1344X	-	VRD1344MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1345X	-	VRD1345MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1346X	-	VRD1346MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1347X	-	VRD1347MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1348X	-	VRD1348MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1349X	-	VRD1349MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D134AX	-	VRD134AMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D134BX	-	VRD134BMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D134CX	-	VRD134CMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D134DX	-	VRD134DMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D134EX	-	VRD134EMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D134FX	-	VRD134FMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D134GX	-	VRD134GMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D134HX	-	VRD134HMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D134JX	-	VRD134JMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D134KX	-	VRD134KMLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1350X	-	VRD1350MLX	LVR-IC	LDO, Dual out, Vo1=1.3V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D13A	-	RP506K131A	DC-DC-IC	PWM/VFM step-down, 1.3V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D13B	-	RP506K131B	DC-DC-IC	PWM/VFM step-down, 1.3V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D13D	-	RP506K131D	DC-DC-IC	PWM/VFM step-down, 1.3V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D13E	-	RP506K131E	DC-DC-IC	PWM/VFM step-down, 1.3V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D1408X	-	VRD1408LLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1409X	-	VRD1409LLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D140JX	-	VRD140JLLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D140KX	-	VRD140KLLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1410X	-	VRD1410LLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1411X	-	VRD1411LLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1412X	-	VRD1412LLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1413X	-	VRD1413LLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1414X	-	VRD1414LLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1415X	-	VRD1415LLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1416X	-	VRD1416LLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1417X	-	VRD1417LLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1418X	-	VRD1418LLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1419X	-	VRD1419LLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D141AX	-	VRD141ALLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D141BX	-	VRD141BLLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D141CX	-	VRD141CLLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D141DX	-	VRD141DLLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D141EX	-	VRD141ELLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D141FX	-	VRD141FLLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D141GX	-	VRD141GLLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D141HX	-	VRD141HLLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D141JX	-	VRD141JLLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D141KX	-	VRD141KMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1420X	-	VRD1420MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1421X	-	VRD1421MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1422X	-	VRD1422MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1423X	-	VRD1423MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1424X	-	VRD1424MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1425X	-	VRD1425MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1426X	-	VRD1426MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1427X	-	VRD1427MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1428X	-	VRD1428MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1429X	-	VRD1429MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D142AX	-	VRD142AMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D142BX	-	VRD142BMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D142CX	-	VRD142CMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D142DX	-	VRD142DMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D142EX	-	VRD142EMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D142FX	-	VRD142FMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D142GX	-	VRD142GMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D142HX	-	VRD142HMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D142JX	-	VRD142JMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D142KX	-	VRD142KMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1430X	-	VRD1430MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1431X	-	VRD1431MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1432X	-	VRD1432MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1433X	-	VRD1433MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1434X	-	VRD1434MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1435X	-	VRD1435MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1436X	-	VRD1436MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1437X	-	VRD1437MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1438X	-	VRD1438MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1439X	-	VRD1439MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D143AX	-	VRD143AMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D143BX	-	VRD143BMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D143CX	-	VRD143CMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D143DX	-	VRD143DMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D143EX	-	VRD143EMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D143FX	-	VRD143FMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D143GX	-	VRD143GMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D143HX	-	VRD143HMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D143JX	-	VRD143JMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D143KX	-	VRD143KMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1440X	-	VRD1440MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1441X	-	VRD1441MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1442X	-	VRD1442MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1443X	-	VRD1443MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1444X	-	VRD1444MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1445X	-	VRD1445MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1446X	-	VRD1446MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1447X	-	VRD1447MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1448X	-	VRD1448MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1449X	-	VRD1449MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D144AX	-	VRD144AMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D144BX	-	VRD144BMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D144CX	-	VRD144CMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D144DX	-	VRD144DMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D144EX	-	VRD144EMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D144FX	-	VRD144FMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D144GX	-	VRD144GMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D144HX	-	VRD144HMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D144JX	-	VRD144JMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D144KX	-	VRD144KMLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1450X	-	VRD1450MLX	LVR-IC	LDO, Dual out, Vo1=1.4V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D14A	-	RP506K141A	DC-DC-IC	PWM/VFM step-down, 1.4V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D14B	-	RP506K141B	DC-DC-IC	PWM/VFM step-down, 1.4V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D14D	-	RP506K141D	DC-DC-IC	PWM/VFM step-down, 1.4V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D14E	-	RP506K141E	DC-DC-IC	PWM/VFM step-down, 1.4V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D1508X	-	VRD1508LLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1509X	-	VRD1509LLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D150JX	-	VRD150JLLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D150KX	-	VRD150KLLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1510X	-	VRD1510LLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1511X	-	VRD1511LLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1512X	-	VRD1512LLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1513X	-	VRD1513LLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1514X	-	VRD1514LLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1515X	-	VRD1515LLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1516X	-	VRD1516LLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1517X	-	VRD1517LLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1518X	-	VRD1518LLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1519X	-	VRD1519LLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D151AX	-	VRD151ALLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D151BX	-	VRD151BLLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D151CX	-	VRD151CLLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D151DX	-	VRD151DLLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D151EX	-	VRD151ELLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D151FX	-	VRD151FLLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D151GX	-	VRD151GLLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D151HX	-	VRD151HLLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D151JX	-	VRD151JLLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D151KX	-	VRD151KMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1520X	-	VRD1520MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1521X	-	VRD1521MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1522X	-	VRD1522MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1523X	-	VRD1523MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1524X	-	VRD1524MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1525X	-	VRD1525MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1526X	-	VRD1526MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1527X	-	VRD1527MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1528X	-	VRD1528MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1529X	-	VRD1529MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D152AX	-	VRD152AMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D152BX	-	VRD152BMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D152CX	-	VRD152CMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D152DX	-	VRD152DMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D152EX	-	VRD152EMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D152FX	-	VRD152FMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D152GX	-	VRD152GMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D152HX	-	VRD152HMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D152JX	-	VRD152JMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D152KX	-	VRD152KMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1530X	-	VRD1530MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1531X	-	VRD1531MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1532X	-	VRD1532MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1533X	-	VRD1533MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1534X	-	VRD1534MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1535X	-	VRD1535MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1536X	-	VRD1536MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1537X	-	VRD1537MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1538X	-	VRD1538MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1539X	-	VRD1539MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D153AX	-	VRD153AMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D153BX	-	VRD153BMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D153CX	-	VRD153CMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D153DX	-	VRD153DMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D153EX	-	VRD153EMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D153FX	-	VRD153FMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D153GX	-	VRD153GMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D153HX	-	VRD153HMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D153JX	-	VRD153JMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D153KX	-	VRD153KMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1540X	-	VRD1540MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1541X	-	VRD1541MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1542X	-	VRD1542MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1543X	-	VRD1543MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1544X	-	VRD1544MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1545X	-	VRD1545MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1546X	-	VRD1546MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1547X	-	VRD1547MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1548X	-	VRD1548MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1549X	-	VRD1549MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D154AX	-	VRD154AMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D154BX	-	VRD154BMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D154CX	-	VRD154CMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D154DX	-	VRD154DMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D154EX	-	VRD154EMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D154FX	-	VRD154FMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D154GX	-	VRD154GMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D154HX	-	VRD154HMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D154JX	-	VRD154JMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D154KX	-	VRD154KMLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1550X	-	VRD1550MLX	LVR-IC	LDO, Dual out, Vo1=1.5V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D15A	-	RP506K151A	DC-DC-IC	PWM/VFM step-down, 1.5V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D15B	-	RP506K151B	DC-DC-IC	PWM/VFM step-down, 1.5V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D15D	-	RP506K151D	DC-DC-IC	PWM/VFM step-down, 1.5V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D15E	-	RP506K151E	DC-DC-IC	PWM/VFM step-down, 1.5V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D1608X	-	VRD1608LLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1609X	-	VRD1609LLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D160JX	-	VRD160JLLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D160KX	-	VRD160KLLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1610X	-	VRD1610LLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1611X	-	VRD1611LLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1612X	-	VRD1612LLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1613X	-	VRD1613LLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1614X	-	VRD1614LLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1615X	-	VRD1615LLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1616X	-	VRD1616LLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1617X	-	VRD1617LLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1618X	-	VRD1618LLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1619X	-	VRD1619LLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D161AX	-	VRD161ALLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D161BX	-	VRD161BLLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D161CX	-	VRD161CLLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D161DX	-	VRD161DLLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D161EX	-	VRD161ELLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D161FX	-	VRD161FLLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D161GX	-	VRD161GLLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D161HX	-	VRD161HLLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D161JX	-	VRD161JLLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D161KX	-	VRD161KMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1620X	-	VRD1620MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1621X	-	VRD1621MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1622X	-	VRD1622MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1623X	-	VRD1623MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1624X	-	VRD1624MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1625X	-	VRD1625MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1626X	-	VRD1626MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1627X	-	VRD1627MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1628X	-	VRD1628MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1629X	-	VRD1629MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D162AX	-	VRD162AMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D162BX	-	VRD162BMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D162CX	-	VRD162CMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D162DX	-	VRD162DMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D162EX	-	VRD162EMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D162FX	-	VRD162FMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D162GX	-	VRD162GMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D162HX	-	VRD162HMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D162JX	-	VRD162JMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D162KX	-	VRD162KMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1630X	-	VRD1630MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1631X	-	VRD1631MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1632X	-	VRD1632MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1633X	-	VRD1633MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1634X	-	VRD1634MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1635X	-	VRD1635MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1636X	-	VRD1636MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1637X	-	VRD1637MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1638X	-	VRD1638MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1639X	-	VRD1639MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D163AX	-	VRD163AMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D163BX	-	VRD163BMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D163CX	-	VRD163CMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D163DX	-	VRD163DMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D163EX	-	VRD163EMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D163FX	-	VRD163FMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D163GX	-	VRD163GMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D163HX	-	VRD163HMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D163JX	-	VRD163JMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D163KX	-	VRD163KMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1640X	-	VRD1640MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1641X	-	VRD1641MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1642X	-	VRD1642MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1643X	-	VRD1643MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1644X	-	VRD1644MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1645X	-	VRD1645MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1646X	-	VRD1646MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1647X	-	VRD1647MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1648X	-	VRD1648MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1649X	-	VRD1649MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D164AX	-	VRD164AMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D164BX	-	VRD164BMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D164CX	-	VRD164CMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D164DX	-	VRD164DMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D164EX	-	VRD164EMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D164FX	-	VRD164FMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D164GX	-	VRD164GMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D164HX	-	VRD164HMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D164JX	-	VRD164JMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D164KX	-	VRD164KMLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1650X	-	VRD1650MLX	LVR-IC	LDO, Dual out, Vo1=1.6V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D16A	-	RP506K161A	DC-DC-IC	PWM/VFM step-down, 1.6V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D16B	-	RP506K161B	DC-DC-IC	PWM/VFM step-down, 1.6V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D16D	-	RP506K161D	DC-DC-IC	PWM/VFM step-down, 1.6V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D16E	-	RP506K161E	DC-DC-IC	PWM/VFM step-down, 1.6V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D1708X	-	VRD1708LLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1709X	-	VRD1709LLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D170JX	-	VRD170JLLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D170KX	-	VRD170KLLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1710X	-	VRD1710LLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1711X	-	VRD1711LLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1712X	-	VRD1712LLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1713X	-	VRD1713LLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1714X	-	VRD1714LLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1715X	-	VRD1715LLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1716X	-	VRD1716LLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1717X	-	VRD1717LLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1718X	-	VRD1718LLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1719X	-	VRD1719LLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D171AX	-	VRD171ALLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D171BX	-	VRD171BLLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D171CX	-	VRD171CLLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D171DX	-	VRD171DLLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D171EX	-	VRD171ELLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D171FX	-	VRD171FLLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D171GX	-	VRD171GLLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D171HX	-	VRD171HLLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D171JX	-	VRD171JLLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D171KX	-	VRD171KMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1720X	-	VRD1720MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1721X	-	VRD1721MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1722X	-	VRD1722MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1723X	-	VRD1723MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1724X	-	VRD1724MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1725X	-	VRD1725MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1726X	-	VRD1726MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1727X	-	VRD1727MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1728X	-	VRD1728MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1729X	-	VRD1729MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D172AX	-	VRD172AMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D172BX	-	VRD172BMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D172CX	-	VRD172CMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D172DX	-	VRD172DMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D172EX	-	VRD172EMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D172FX	-	VRD172FMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D172GX	-	VRD172GMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D172HX	-	VRD172HMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D172JX	-	VRD172JMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D172KX	-	VRD172KMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1730X	-	VRD1730MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1731X	-	VRD1731MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1732X	-	VRD1732MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1733X	-	VRD1733MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1734X	-	VRD1734MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1735X	-	VRD1735MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1736X	-	VRD1736MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1737X	-	VRD1737MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1738X	-	VRD1738MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1739X	-	VRD1739MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D173AX	-	VRD173AMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D173BX	-	VRD173BMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D173CX	-	VRD173CMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D173DX	-	VRD173DMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D173EX	-	VRD173EMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D173FX	-	VRD173FMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D173GX	-	VRD173GMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D173HX	-	VRD173HMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D173JX	-	VRD173JMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D173KX	-	VRD173KMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1740X	-	VRD1740MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1741X	-	VRD1741MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1742X	-	VRD1742MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1743X	-	VRD1743MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1744X	-	VRD1744MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1745X	-	VRD1745MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1746X	-	VRD1746MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1747X	-	VRD1747MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1748X	-	VRD1748MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1749X	-	VRD1749MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D174AX	-	VRD174AMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D174BX	-	VRD174BMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D174CX	-	VRD174CMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D174DX	-	VRD174DMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D174EX	-	VRD174EMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D174FX	-	VRD174FMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D174GX	-	VRD174GMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D174HX	-	VRD174HMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D174JX	-	VRD174JMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D174KX	-	VRD174KMLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1750X	-	VRD1750MLX	LVR-IC	LDO, Dual out, Vo1=1.7V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D17A	-	RP506K171A	DC-DC-IC	PWM/VFM step-down, 1.7V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D17B	-	RP506K171B	DC-DC-IC	PWM/VFM step-down, 1.7V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D17D	-	RP506K171D	DC-DC-IC	PWM/VFM step-down, 1.7V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D17E	-	RP506K171E	DC-DC-IC	PWM/VFM step-down, 1.7V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D1808X	-	VRD1808LLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1809X	-	VRD1809LLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D180JX	-	VRD180JLLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D180KX	-	VRD180KLLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1810X	-	VRD1810LLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1811X	-	VRD1811LLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1812X	-	VRD1812LLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1813X	-	VRD1813LLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1814X	-	VRD1814LLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1815X	-	VRD1815LLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1816X	-	VRD1816LLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1817X	-	VRD1817LLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1818X	-	VRD1818LLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1819X	-	VRD1819LLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D181AX	-	VRD181ALLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D181BX	-	VRD181BLLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D181CX	-	VRD181CLLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D181DX	-	VRD181DLLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D181EX	-	VRD181ELLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D181FX	-	VRD181FLLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D181GX	-	VRD181GLLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D181HX	-	VRD181HLLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D181JX	-	VRD181JLLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D181KX	-	VRD181KMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1820X	-	VRD1820MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1821X	-	VRD1821MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1822X	-	VRD1822MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1823X	-	VRD1823MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1824X	-	VRD1824MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1825X	-	VRD1825MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1826X	-	VRD1826MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1827X	-	VRD1827MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1828X	-	VRD1828MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1829X	-	VRD1829MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D182AX	-	VRD182AMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D182BX	-	VRD182BMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D182CX	-	VRD182CMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D182DX	-	VRD182DMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D182EX	-	VRD182EMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D182FX	-	VRD182FMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D182GX	-	VRD182GMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D182HX	-	VRD182HMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D182JX	-	VRD182JMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D182KX	-	VRD182KMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1830X	-	VRD1830MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1831X	-	VRD1831MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1832X	-	VRD1832MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1833X	-	VRD1833MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1834X	-	VRD1834MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1835X	-	VRD1835MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1836X	-	VRD1836MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1837X	-	VRD1837MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1838X	-	VRD1838MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1839X	-	VRD1839MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D183AX	-	VRD183AMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D183BX	-	VRD183BMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D183CX	-	VRD183CMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D183DX	-	VRD183DMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D183EX	-	VRD183EMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D183FX	-	VRD183FMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D183GX	-	VRD183GMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D183HX	-	VRD183HMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D183JX	-	VRD183JMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D183KX	-	VRD183KMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1840X	-	VRD1840MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1841X	-	VRD1841MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1842X	-	VRD1842MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1843X	-	VRD1843MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1844X	-	VRD1844MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1845X	-	VRD1845MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1846X	-	VRD1846MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1847X	-	VRD1847MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1848X	-	VRD1848MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1849X	-	VRD1849MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D184AX	-	VRD184AMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D184BX	-	VRD184BMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D184CX	-	VRD184CMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D184DX	-	VRD184DMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D184EX	-	VRD184EMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D184FX	-	VRD184FMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D184GX	-	VRD184GMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D184HX	-	VRD184HMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D184JX	-	VRD184JMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D184KX	-	VRD184KMLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1850X	-	VRD1850MLX	LVR-IC	LDO, Dual out, Vo1=1.8V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D18A	-	RP506K181A	DC-DC-IC	PWM/VFM step-down, 1.8V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D18B	-	RP506K181B	DC-DC-IC	PWM/VFM step-down, 1.8V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D18D	-	RP506K181D	DC-DC-IC	PWM/VFM step-down, 1.8V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D18E	-	RP506K181E	DC-DC-IC	PWM/VFM step-down, 1.8V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D1908X	-	VRD1908LLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1909X	-	VRD1909LLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D190JX	-	VRD190JLLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D190KX	-	VRD190KLLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1910X	-	VRD1910LLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1911X	-	VRD1911LLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1912X	-	VRD1912LLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1913X	-	VRD1913LLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1914X	-	VRD1914LLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1915X	-	VRD1915LLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1916X	-	VRD1916LLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1917X	-	VRD1917LLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1918X	-	VRD1918LLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1919X	-	VRD1919LLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D191AX	-	VRD191ALLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D191BX	-	VRD191BLLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D191CX	-	VRD191CLLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D191DX	-	VRD191DLLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D191EX	-	VRD191ELLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D191FX	-	VRD191FLLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D191GX	-	VRD191GLLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D191HX	-	VRD191HLLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D191JX	-	VRD191JLLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D191KX	-	VRD191KMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1920X	-	VRD1920MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1921X	-	VRD1921MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1922X	-	VRD1922MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1923X	-	VRD1923MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1924X	-	VRD1924MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1925X	-	VRD1925MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1926X	-	VRD1926MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1927X	-	VRD1927MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1928X	-	VRD1928MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1929X	-	VRD1929MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D192AX	-	VRD192AMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D192BX	-	VRD192BMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D192CX	-	VRD192CMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D192DX	-	VRD192DMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D192EX	-	VRD192EMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D192FX	-	VRD192FMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D192GX	-	VRD192GMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D192HX	-	VRD192HMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D192JX	-	VRD192JMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D192KX	-	VRD192KMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1930X	-	VRD1930MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1931X	-	VRD1931MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1932X	-	VRD1932MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1933X	-	VRD1933MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1934X	-	VRD1934MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1935X	-	VRD1935MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1936X	-	VRD1936MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1937X	-	VRD1937MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1938X	-	VRD1938MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1939X	-	VRD1939MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D193AX	-	VRD193AMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D193BX	-	VRD193BMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D193CX	-	VRD193CMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D193DX	-	VRD193DMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D193EX	-	VRD193EMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D193FX	-	VRD193FMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D193GX	-	VRD193GMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D193HX	-	VRD193HMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D193JX	-	VRD193JMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D193KX	-	VRD193KMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1940X	-	VRD1940MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1941X	-	VRD1941MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1942X	-	VRD1942MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1943X	-	VRD1943MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1944X	-	VRD1944MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1945X	-	VRD1945MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1946X	-	VRD1946MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1947X	-	VRD1947MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1948X	-	VRD1948MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1949X	-	VRD1949MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D194AX	-	VRD194AMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D194BX	-	VRD194BMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D194CX	-	VRD194CMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D194DX	-	VRD194DMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D194EX	-	VRD194EMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D194FX	-	VRD194FMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D194GX	-	VRD194GMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D194HX	-	VRD194HMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D194JX	-	VRD194JMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D194KX	-	VRD194KMLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1950X	-	VRD1950MLX	LVR-IC	LDO, Dual out, Vo1=1.9V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D19A	-	RP506K191A	DC-DC-IC	PWM/VFM step-down, 1.9V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D19B	-	RP506K191B	DC-DC-IC	PWM/VFM step-down, 1.9V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D19D	-	RP506K191D	DC-DC-IC	PWM/VFM step-down, 1.9V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D19E	-	RP506K191E	DC-DC-IC	PWM/VFM step-down, 1.9V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D1A	-	XC6108C31AGR	Vdet-IC	3.1V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D1A08X	-	VRD1A08LLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A09X	-	VRD1A09LLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A0JX	-	VRD1A0JLLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1A0KX	-	VRD1A0KLLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A10X	-	VRD1A10LLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A11X	-	VRD1A11LLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A12X	-	VRD1A12LLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A13X	-	VRD1A13LLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A14X	-	VRD1A14LLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A15X	-	VRD1A15LLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A16X	-	VRD1A16LLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A17X	-	VRD1A17LLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A18X	-	VRD1A18LLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A19X	-	VRD1A19LLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A1AX	-	VRD1A1ALLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A1BX	-	VRD1A1BLLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A1CX	-	VRD1A1CLLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A1DX	-	VRD1A1DLLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A1EX	-	VRD1A1ELLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A1FX	-	VRD1A1FLLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A1GX	-	VRD1A1GLLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A1HX	-	VRD1A1HLLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A1JX	-	VRD1A1JLLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A1KX	-	VRD1A1KMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A20X	-	VRD1A20MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A21X	-	VRD1A21MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A22X	-	VRD1A22MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A23X	-	VRD1A23MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A24X	-	VRD1A24MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A25X	-	VRD1A25MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A26X	-	VRD1A26MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A27X	-	VRD1A27MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A28X	-	VRD1A28MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A29X	-	VRD1A29MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A2AX	-	VRD1A2AMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A2BX	-	VRD1A2BMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A2CX	-	VRD1A2CMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A2DX	-	VRD1A2DMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A2EX	-	VRD1A2EMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A2FX	-	VRD1A2FMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A2GX	-	VRD1A2GMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A2HX	-	VRD1A2HMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A2JX	-	VRD1A2JMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A2KX	-	VRD1A2KMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A30X	-	VRD1A30MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A31X	-	VRD1A31MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A32X	-	VRD1A32MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A33X	-	VRD1A33MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A34X	-	VRD1A34MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A35X	-	VRD1A35MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A36X	-	VRD1A36MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A37X	-	VRD1A37MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A38X	-	VRD1A38MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A39X	-	VRD1A39MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A3AX	-	VRD1A3AMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A3BX	-	VRD1A3BMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A3CX	-	VRD1A3CMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A3DX	-	VRD1A3DMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A3EX	-	VRD1A3EMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A3FX	-	VRD1A3FMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A3GX	-	VRD1A3GMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A3HX	-	VRD1A3HMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A3JX	-	VRD1A3JMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A3KX	-	VRD1A3KMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A40X	-	VRD1A40MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A41X	-	VRD1A41MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A42X	-	VRD1A42MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A43X	-	VRD1A43MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A44X	-	VRD1A44MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A45X	-	VRD1A45MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A46X	-	VRD1A46MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A47X	-	VRD1A47MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A48X	-	VRD1A48MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1A49X	-	VRD1A49MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A4AX	-	VRD1A4AMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A4BX	-	VRD1A4BMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A4CX	-	VRD1A4CMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A4DX	-	VRD1A4DMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A4EX	-	VRD1A4EMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A4FX	-	VRD1A4FMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A4GX	-	VRD1A4GMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A4HX	-	VRD1A4HMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A4JX	-	VRD1A4JMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A4KX	-	VRD1A4KMLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1A50X	-	VRD1A50MLX	LVR-IC	LDO, Dual out, Vo1=1.05V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B	-	XC6108C31BGR	Vdet-IC	3.1V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D1B08X	-	VRD1B08LLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B09X	-	VRD1B09LLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B0JX	-	VRD1B0JLLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B0KX	-	VRD1B0KLLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B10X	-	VRD1B10LLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B11X	-	VRD1B11LLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B12X	-	VRD1B12LLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B13X	-	VRD1B13LLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B14X	-	VRD1B14LLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B15X	-	VRD1B15LLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B16X	-	VRD1B16LLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B17X	-	VRD1B17LLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B18X	-	VRD1B18LLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B19X	-	VRD1B19LLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B1AX	-	VRD1B1ALLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B1BX	-	VRD1B1BLLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B1CX	-	VRD1B1CLLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B1DX	-	VRD1B1DLLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B1EX	-	VRD1B1ELLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B1FX	-	VRD1B1FLLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B1GX	-	VRD1B1GLLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B1HX	-	VRD1B1HLLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B1JX	-	VRD1B1JLLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B1KX	-	VRD1B1KMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B20X	-	VRD1B20MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B21X	-	VRD1B21MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B22X	-	VRD1B22MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B23X	-	VRD1B23MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B24X	-	VRD1B24MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B25X	-	VRD1B25MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B26X	-	VRD1B26MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B27X	-	VRD1B27MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B28X	-	VRD1B28MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B29X	-	VRD1B29MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B2AX	-	VRD1B2AMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B2BX	-	VRD1B2BMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B2CX	-	VRD1B2CMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B2DX	-	VRD1B2DMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B2EX	-	VRD1B2EMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B2FX	-	VRD1B2FMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B2GX	-	VRD1B2GMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B2HX	-	VRD1B2HMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B2JX	-	VRD1B2JMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B2KX	-	VRD1B2KMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B30X	-	VRD1B30MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B31X	-	VRD1B31MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B32X	-	VRD1B32MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B33X	-	VRD1B33MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B34X	-	VRD1B34MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B35X	-	VRD1B35MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B36X	-	VRD1B36MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B37X	-	VRD1B37MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B38X	-	VRD1B38MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B39X	-	VRD1B39MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B3AX	-	VRD1B3AMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B3BX	-	VRD1B3BMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B3CX	-	VRD1B3CMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1B3DX	-	VRD1B3DMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B3EX	-	VRD1B3EMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B3FX	-	VRD1B3FMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B3GX	-	VRD1B3GMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B3HX	-	VRD1B3HMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B3JX	-	VRD1B3JMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B3KX	-	VRD1B3KMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B40X	-	VRD1B40MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B41X	-	VRD1B41MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B42X	-	VRD1B42MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B43X	-	VRD1B43MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B44X	-	VRD1B44MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B45X	-	VRD1B45MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B46X	-	VRD1B46MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B47X	-	VRD1B47MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B48X	-	VRD1B48MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B49X	-	VRD1B49MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B4AX	-	VRD1B4AMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B4BX	-	VRD1B4BMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B4CX	-	VRD1B4CMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B4DX	-	VRD1B4DMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B4EX	-	VRD1B4EMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B4FX	-	VRD1B4FMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B4GX	-	VRD1B4GMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B4HX	-	VRD1B4HMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B4JX	-	VRD1B4JMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B4KX	-	VRD1B4KMLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1B50X	-	VRD1B50MLX	LVR-IC	LDO, Dual out, Vo1=1.15V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C	-	XC6108C31CGR	Vdet-IC	3.1V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D1C08X	-	VRD1C08LLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C09X	-	VRD1C09LLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C0JX	-	VRD1C0JLLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C0KX	-	VRD1C0KLLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C10X	-	VRD1C10LLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C11X	-	VRD1C11LLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C12X	-	VRD1C12LLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C13X	-	VRD1C13LLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C14X	-	VRD1C14LLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C15X	-	VRD1C15LLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C16X	-	VRD1C16LLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C17X	-	VRD1C17LLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C18X	-	VRD1C18LLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C19X	-	VRD1C19LLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C1AX	-	VRD1C1ALLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C1BX	-	VRD1C1BLLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C1CX	-	VRD1C1CLLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C1DX	-	VRD1C1DLLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C1EX	-	VRD1C1ELLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C1FX	-	VRD1C1FLLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C1GX	-	VRD1C1GLLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C1HX	-	VRD1C1HLLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C1JX	-	VRD1C1JLLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C1KX	-	VRD1C1KMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C20X	-	VRD1C20MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C21X	-	VRD1C21MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C22X	-	VRD1C22MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C23X	-	VRD1C23MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C24X	-	VRD1C24MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C25X	-	VRD1C25MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C26X	-	VRD1C26MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C27X	-	VRD1C27MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C28X	-	VRD1C28MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C29X	-	VRD1C29MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C2AX	-	VRD1C2AMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C2BX	-	VRD1C2BMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C2CX	-	VRD1C2CMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C2DX	-	VRD1C2DMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C2EX	-	VRD1C2EMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C2FX	-	VRD1C2FMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C2GX	-	VRD1C2GMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1C2HX	-	VRD1C2HMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C2JX	-	VRD1C2JMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C2KX	-	VRD1C2KMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C30X	-	VRD1C30MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C31X	-	VRD1C31MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C32X	-	VRD1C32MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C33X	-	VRD1C33MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C34X	-	VRD1C34MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C35X	-	VRD1C35MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C36X	-	VRD1C36MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C37X	-	VRD1C37MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C38X	-	VRD1C38MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C39X	-	VRD1C39MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C3AX	-	VRD1C3AMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C3BX	-	VRD1C3BMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C3CX	-	VRD1C3CMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C3DX	-	VRD1C3DMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C3EX	-	VRD1C3EMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C3FX	-	VRD1C3FMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C3GX	-	VRD1C3GMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C3HX	-	VRD1C3HMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C3JX	-	VRD1C3JMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C3KX	-	VRD1C3KMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C40X	-	VRD1C40MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C41X	-	VRD1C41MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C42X	-	VRD1C42MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C43X	-	VRD1C43MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C44X	-	VRD1C44MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C45X	-	VRD1C45MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C46X	-	VRD1C46MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C47X	-	VRD1C47MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C48X	-	VRD1C48MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C49X	-	VRD1C49MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C4AX	-	VRD1C4AMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C4BX	-	VRD1C4BMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C4CX	-	VRD1C4CMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C4DX	-	VRD1C4DMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C4EX	-	VRD1C4EMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C4FX	-	VRD1C4FMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C4GX	-	VRD1C4GMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C4HX	-	VRD1C4HMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C4JX	-	VRD1C4JMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C4KX	-	VRD1C4KMLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1C50X	-	VRD1C50MLX	LVR-IC	LDO, Dual out, Vo1=1.25V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D	-	XC6108C31DGR	Vdet-IC	3.1V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D1D08X	-	VRD1D08LLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D09X	-	VRD1D09LLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D0JX	-	VRD1D0JLLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D0KX	-	VRD1D0KLLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D10X	-	VRD1D10LLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D11X	-	VRD1D11LLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D12X	-	VRD1D12LLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D13X	-	VRD1D13LLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D14X	-	VRD1D14LLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D15X	-	VRD1D15LLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D16X	-	VRD1D16LLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D17X	-	VRD1D17LLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D18X	-	VRD1D18LLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D19X	-	VRD1D19LLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D1AX	-	VRD1D1ALLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D1BX	-	VRD1D1BLLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D1CX	-	VRD1D1CLLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D1DX	-	VRD1D1DLLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D1EX	-	VRD1D1ELLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D1FX	-	VRD1D1FLLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D1GX	-	VRD1D1GLLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D1HX	-	VRD1D1HLLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D1JX	-	VRD1D1JLLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D1KX	-	VRD1D1KMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D20X	-	VRD1D20MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1D21X	-	VRD1D21MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D22X	-	VRD1D22MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D23X	-	VRD1D23MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D24X	-	VRD1D24MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D25X	-	VRD1D25MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D26X	-	VRD1D26MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D27X	-	VRD1D27MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D28X	-	VRD1D28MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D29X	-	VRD1D29MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D2AX	-	VRD1D2AMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D2BX	-	VRD1D2BMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D2CX	-	VRD1D2CMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D2DX	-	VRD1D2DMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D2EX	-	VRD1D2EMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D2FX	-	VRD1D2FMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D2GX	-	VRD1D2GMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D2HX	-	VRD1D2HMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D2JX	-	VRD1D2JMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D2KX	-	VRD1D2KMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D30X	-	VRD1D30MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D31X	-	VRD1D31MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D32X	-	VRD1D32MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D33X	-	VRD1D33MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D34X	-	VRD1D34MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D35X	-	VRD1D35MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D36X	-	VRD1D36MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D37X	-	VRD1D37MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D38X	-	VRD1D38MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D39X	-	VRD1D39MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D3AX	-	VRD1D3AMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D3BX	-	VRD1D3BMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D3CX	-	VRD1D3CMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D3DX	-	VRD1D3DMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D3EX	-	VRD1D3EMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D3FX	-	VRD1D3FMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D3GX	-	VRD1D3GMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D3HX	-	VRD1D3HMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D3JX	-	VRD1D3JMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D3KX	-	VRD1D3KMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D40X	-	VRD1D40MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D41X	-	VRD1D41MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D42X	-	VRD1D42MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D43X	-	VRD1D43MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D44X	-	VRD1D44MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D45X	-	VRD1D45MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D46X	-	VRD1D46MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D47X	-	VRD1D47MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D48X	-	VRD1D48MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D49X	-	VRD1D49MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D4AX	-	VRD1D4AMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D4BX	-	VRD1D4BMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D4CX	-	VRD1D4CMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D4DX	-	VRD1D4DMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D4EX	-	VRD1D4EMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D4FX	-	VRD1D4FMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D4GX	-	VRD1D4GMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D4HX	-	VRD1D4HMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D4JX	-	VRD1D4JMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D4KX	-	VRD1D4KMLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1D50X	-	VRD1D50MLX	LVR-IC	LDO, Dual out, Vo1=1.35V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E08X	-	VRD1E08LLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E09X	-	VRD1E09LLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E0JX	-	VRD1E0JLLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E0KX	-	VRD1E0KLLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E10X	-	VRD1E10LLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E11X	-	VRD1E11LLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E12X	-	VRD1E12LLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E13X	-	VRD1E13LLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E14X	-	VRD1E14LLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E15X	-	VRD1E15LLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1E16X	-	VRD1E16LLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E17X	-	VRD1E17LLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E18X	-	VRD1E18LLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E19X	-	VRD1E19LLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E1AX	-	VRD1E1ALLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E1BX	-	VRD1E1BLLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E1CX	-	VRD1E1CLLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E1DX	-	VRD1E1DLLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E1EX	-	VRD1E1ELLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E1FX	-	VRD1E1FLLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E1GX	-	VRD1E1GLLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E1HX	-	VRD1E1HLLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E1JX	-	VRD1E1JLLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E1KX	-	VRD1E1KMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E20X	-	VRD1E20MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E21X	-	VRD1E21MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E22X	-	VRD1E22MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E23X	-	VRD1E23MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E24X	-	VRD1E24MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E25X	-	VRD1E25MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E26X	-	VRD1E26MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E27X	-	VRD1E27MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E28X	-	VRD1E28MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E29X	-	VRD1E29MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E2AX	-	VRD1E2AMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E2BX	-	VRD1E2BMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E2CX	-	VRD1E2CMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E2DX	-	VRD1E2DMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E2EX	-	VRD1E2EMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E2FX	-	VRD1E2FMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E2GX	-	VRD1E2GMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E2HX	-	VRD1E2HMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E2JX	-	VRD1E2JMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E2KX	-	VRD1E2KMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E30X	-	VRD1E30MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E31X	-	VRD1E31MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E32X	-	VRD1E32MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E33X	-	VRD1E33MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E34X	-	VRD1E34MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E35X	-	VRD1E35MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E36X	-	VRD1E36MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E37X	-	VRD1E37MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E38X	-	VRD1E38MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E39X	-	VRD1E39MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E3AX	-	VRD1E3AMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E3BX	-	VRD1E3BMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E3CX	-	VRD1E3CMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E3DX	-	VRD1E3DMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E3EX	-	VRD1E3EMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E3FX	-	VRD1E3FMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E3GX	-	VRD1E3GMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E3HX	-	VRD1E3HMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E3JX	-	VRD1E3JMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E3KX	-	VRD1E3KMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E40X	-	VRD1E40MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E41X	-	VRD1E41MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E42X	-	VRD1E42MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E43X	-	VRD1E43MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E44X	-	VRD1E44MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E45X	-	VRD1E45MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E46X	-	VRD1E46MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E47X	-	VRD1E47MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E48X	-	VRD1E48MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E49X	-	VRD1E49MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E4AX	-	VRD1E4AMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E4BX	-	VRD1E4BMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E4CX	-	VRD1E4CMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E4DX	-	VRD1E4DMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E4EX	-	VRD1E4EMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E4FX	-	VRD1E4FMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1E4GX	-	VRD1E4GMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E4HX	-	VRD1E4HMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E4JX	-	VRD1E4JMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E4KX	-	VRD1E4KMLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1E50X	-	VRD1E50MLX	LVR-IC	LDO, Dual out, Vo1=1.45V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F08X	-	VRD1F08LLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F09X	-	VRD1F09LLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F0JX	-	VRD1F0JLLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F0KX	-	VRD1F0KLLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F10X	-	VRD1F10LLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F11X	-	VRD1F11LLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F12X	-	VRD1F12LLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F13X	-	VRD1F13LLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F14X	-	VRD1F14LLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F15X	-	VRD1F15LLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F16X	-	VRD1F16LLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F17X	-	VRD1F17LLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F18X	-	VRD1F18LLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F19X	-	VRD1F19LLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F1AX	-	VRD1F1ALLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F1BX	-	VRD1F1BLLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F1CX	-	VRD1F1CLLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F1DX	-	VRD1F1DLLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F1EX	-	VRD1F1ELLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F1FX	-	VRD1F1FLLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F1GX	-	VRD1F1GLLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F1HX	-	VRD1F1HLLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F1JX	-	VRD1F1JLLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F1KX	-	VRD1F1KMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F20X	-	VRD1F20MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F21X	-	VRD1F21MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F22X	-	VRD1F22MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F23X	-	VRD1F23MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F24X	-	VRD1F24MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F25X	-	VRD1F25MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F26X	-	VRD1F26MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F27X	-	VRD1F27MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F28X	-	VRD1F28MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F29X	-	VRD1F29MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F2AX	-	VRD1F2AMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F2BX	-	VRD1F2BMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F2CX	-	VRD1F2CMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F2DX	-	VRD1F2DMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F2EX	-	VRD1F2EMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F2FX	-	VRD1F2FMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F2GX	-	VRD1F2GMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F2HX	-	VRD1F2HMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F2JX	-	VRD1F2JMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F2KX	-	VRD1F2KMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F30X	-	VRD1F30MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F31X	-	VRD1F31MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F32X	-	VRD1F32MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F33X	-	VRD1F33MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F34X	-	VRD1F34MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F35X	-	VRD1F35MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F36X	-	VRD1F36MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F37X	-	VRD1F37MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F38X	-	VRD1F38MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F39X	-	VRD1F39MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F3AX	-	VRD1F3AMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F3BX	-	VRD1F3BMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F3CX	-	VRD1F3CMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F3DX	-	VRD1F3DMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F3EX	-	VRD1F3EMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F3FX	-	VRD1F3FMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F3GX	-	VRD1F3GMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F3HX	-	VRD1F3HMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F3JX	-	VRD1F3JMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F3KX	-	VRD1F3KMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F40X	-	VRD1F40MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1F41X	-	VRD1F41MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F42X	-	VRD1F42MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F43X	-	VRD1F43MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F44X	-	VRD1F44MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F45X	-	VRD1F45MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F46X	-	VRD1F46MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F47X	-	VRD1F47MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F48X	-	VRD1F48MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F49X	-	VRD1F49MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F4AX	-	VRD1F4AMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F4BX	-	VRD1F4BMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F4CX	-	VRD1F4CMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F4DX	-	VRD1F4DMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F4EX	-	VRD1F4EMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F4FX	-	VRD1F4FMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F4GX	-	VRD1F4GMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F4HX	-	VRD1F4HMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F4JX	-	VRD1F4JMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F4KX	-	VRD1F4KMLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1F50X	-	VRD1F50MLX	LVR-IC	LDO, Dual out, Vo1=1.55V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G08X	-	VRD1G08LLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G09X	-	VRD1G09LLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G0JX	-	VRD1G0JLLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G0KX	-	VRD1G0KLLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G10X	-	VRD1G10LLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G11X	-	VRD1G11LLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G12X	-	VRD1G12LLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G13X	-	VRD1G13LLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G14X	-	VRD1G14LLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G15X	-	VRD1G15LLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G16X	-	VRD1G16LLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G17X	-	VRD1G17LLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G18X	-	VRD1G18LLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G19X	-	VRD1G19LLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G1AX	-	VRD1G1ALLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G1BX	-	VRD1G1BLLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G1CX	-	VRD1G1CLLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G1DX	-	VRD1G1DLLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G1EX	-	VRD1G1ELLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G1FX	-	VRD1G1FLLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G1GX	-	VRD1G1GLLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G1HX	-	VRD1G1HLLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G1JX	-	VRD1G1JLLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G1KX	-	VRD1G1KMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G20X	-	VRD1G20MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G21X	-	VRD1G21MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G22X	-	VRD1G22MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G23X	-	VRD1G23MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G24X	-	VRD1G24MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G25X	-	VRD1G25MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G26X	-	VRD1G26MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G27X	-	VRD1G27MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G28X	-	VRD1G28MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G29X	-	VRD1G29MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G2AX	-	VRD1G2AMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G2BX	-	VRD1G2BMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G2CX	-	VRD1G2CMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G2DX	-	VRD1G2DMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G2EX	-	VRD1G2EMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G2FX	-	VRD1G2FMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G2GX	-	VRD1G2GMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G2HX	-	VRD1G2HMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G2JX	-	VRD1G2JMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G2KX	-	VRD1G2KMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G30X	-	VRD1G30MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G31X	-	VRD1G31MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G32X	-	VRD1G32MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G33X	-	VRD1G33MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G34X	-	VRD1G34MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G35X	-	VRD1G35MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1G36X	-	VRD1G36MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G37X	-	VRD1G37MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G38X	-	VRD1G38MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G39X	-	VRD1G39MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G3AX	-	VRD1G3AMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G3BX	-	VRD1G3BMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G3CX	-	VRD1G3CMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G3DX	-	VRD1G3DMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G3EX	-	VRD1G3EMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G3FX	-	VRD1G3FMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G3GX	-	VRD1G3GMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G3HX	-	VRD1G3HMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G3JX	-	VRD1G3JMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G3KX	-	VRD1G3KMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G40X	-	VRD1G40MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G41X	-	VRD1G41MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G42X	-	VRD1G42MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G43X	-	VRD1G43MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G44X	-	VRD1G44MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G45X	-	VRD1G45MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G46X	-	VRD1G46MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G47X	-	VRD1G47MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G48X	-	VRD1G48MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G49X	-	VRD1G49MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G4AX	-	VRD1G4AMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G4BX	-	VRD1G4BMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G4CX	-	VRD1G4CMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G4DX	-	VRD1G4DMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G4EX	-	VRD1G4EMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G4FX	-	VRD1G4FMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G4GX	-	VRD1G4GMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G4HX	-	VRD1G4HMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G4JX	-	VRD1G4JMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G4KX	-	VRD1G4KMLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1G50X	-	VRD1G50MLX	LVR-IC	LDO, Dual out, Vo1=1.65V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H08X	-	VRD1H08LLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H09X	-	VRD1H09LLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H0JX	-	VRD1H0JLLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H0KX	-	VRD1H0KLLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H10X	-	VRD1H10LLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H11X	-	VRD1H11LLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H12X	-	VRD1H12LLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H13X	-	VRD1H13LLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H14X	-	VRD1H14LLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H15X	-	VRD1H15LLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H16X	-	VRD1H16LLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H17X	-	VRD1H17LLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H18X	-	VRD1H18LLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H19X	-	VRD1H19LLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H1AX	-	VRD1H1ALLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H1BX	-	VRD1H1BLLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H1CX	-	VRD1H1CLLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H1DX	-	VRD1H1DLLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H1EX	-	VRD1H1ELLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H1FX	-	VRD1H1FLLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H1GX	-	VRD1H1GLLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H1HX	-	VRD1H1HLLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H1JX	-	VRD1H1JLLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H1KX	-	VRD1H1KMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H20X	-	VRD1H20MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H21X	-	VRD1H21MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H22X	-	VRD1H22MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H23X	-	VRD1H23MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H24X	-	VRD1H24MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H25X	-	VRD1H25MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H26X	-	VRD1H26MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H27X	-	VRD1H27MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H28X	-	VRD1H28MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H29X	-	VRD1H29MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H2AX	-	VRD1H2AMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1H2BX	-	VRD1H2BMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H2CX	-	VRD1H2CMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H2DX	-	VRD1H2DMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H2EX	-	VRD1H2EMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H2FX	-	VRD1H2FMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H2GX	-	VRD1H2GMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H2HX	-	VRD1H2HMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H2JX	-	VRD1H2JMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H2KX	-	VRD1H2KMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H30X	-	VRD1H30MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H31X	-	VRD1H31MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H32X	-	VRD1H32MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H33X	-	VRD1H33MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H34X	-	VRD1H34MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H35X	-	VRD1H35MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H36X	-	VRD1H36MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H37X	-	VRD1H37MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H38X	-	VRD1H38MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H39X	-	VRD1H39MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H3AX	-	VRD1H3AMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H3BX	-	VRD1H3BMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H3CX	-	VRD1H3CMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H3DX	-	VRD1H3DMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H3EX	-	VRD1H3EMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H3FX	-	VRD1H3FMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H3GX	-	VRD1H3GMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H3HX	-	VRD1H3HMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H3JX	-	VRD1H3JMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H3KX	-	VRD1H3KMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H40X	-	VRD1H40MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H41X	-	VRD1H41MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H42X	-	VRD1H42MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H43X	-	VRD1H43MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H44X	-	VRD1H44MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H45X	-	VRD1H45MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H46X	-	VRD1H46MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H47X	-	VRD1H47MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H48X	-	VRD1H48MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H49X	-	VRD1H49MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H4AX	-	VRD1H4AMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H4BX	-	VRD1H4BMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H4CX	-	VRD1H4CMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H4DX	-	VRD1H4DMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H4EX	-	VRD1H4EMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H4FX	-	VRD1H4FMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H4GX	-	VRD1H4GMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H4HX	-	VRD1H4HMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H4JX	-	VRD1H4JMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H4KX	-	VRD1H4KMLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1H50X	-	VRD1H50MLX	LVR-IC	LDO, Dual out, Vo1=1.75V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J08X	-	VRD1J08LLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J09X	-	VRD1J09LLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J0JX	-	VRD1J0JLLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J0KX	-	VRD1J0KLLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J10X	-	VRD1J10LLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J11X	-	VRD1J11LLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J12X	-	VRD1J12LLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J13X	-	VRD1J13LLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J14X	-	VRD1J14LLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J15X	-	VRD1J15LLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J16X	-	VRD1J16LLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J17X	-	VRD1J17LLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J18X	-	VRD1J18LLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J19X	-	VRD1J19LLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J1AX	-	VRD1J1ALLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J1BX	-	VRD1J1BLLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J1CX	-	VRD1J1CLLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J1DX	-	VRD1J1DLLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J1EX	-	VRD1J1ELLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J1FX	-	VRD1J1FLLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1J1GX	-	VRD1J1GLLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J1HX	-	VRD1J1HLLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J1JX	-	VRD1J1JLLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J1KX	-	VRD1J1KMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J20X	-	VRD1J20MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J21X	-	VRD1J21MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J22X	-	VRD1J22MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J23X	-	VRD1J23MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J24X	-	VRD1J24MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J25X	-	VRD1J25MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J26X	-	VRD1J26MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J27X	-	VRD1J27MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J28X	-	VRD1J28MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J29X	-	VRD1J29MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J2AX	-	VRD1J2AMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J2BX	-	VRD1J2BMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J2CX	-	VRD1J2CMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J2DX	-	VRD1J2DMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J2EX	-	VRD1J2EMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J2FX	-	VRD1J2FMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J2GX	-	VRD1J2GMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J2HX	-	VRD1J2HMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J2JX	-	VRD1J2JMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J2KX	-	VRD1J2KMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J30X	-	VRD1J30MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J31X	-	VRD1J31MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J32X	-	VRD1J32MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J33X	-	VRD1J33MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J34X	-	VRD1J34MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J35X	-	VRD1J35MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J36X	-	VRD1J36MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J37X	-	VRD1J37MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J38X	-	VRD1J38MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J39X	-	VRD1J39MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J3AX	-	VRD1J3AMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J3BX	-	VRD1J3BMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J3CX	-	VRD1J3CMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J3DX	-	VRD1J3DMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J3EX	-	VRD1J3EMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J3FX	-	VRD1J3FMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J3GX	-	VRD1J3GMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J3HX	-	VRD1J3HMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J3JX	-	VRD1J3JMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J3KX	-	VRD1J3KMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J40X	-	VRD1J40MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J41X	-	VRD1J41MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J42X	-	VRD1J42MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J43X	-	VRD1J43MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J44X	-	VRD1J44MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J45X	-	VRD1J45MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J46X	-	VRD1J46MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J47X	-	VRD1J47MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J48X	-	VRD1J48MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J49X	-	VRD1J49MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J4AX	-	VRD1J4AMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J4BX	-	VRD1J4BMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J4CX	-	VRD1J4CMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J4DX	-	VRD1J4DMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J4EX	-	VRD1J4EMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J4FX	-	VRD1J4FMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J4GX	-	VRD1J4GMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J4HX	-	VRD1J4HMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J4JX	-	VRD1J4JMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J4KX	-	VRD1J4KMLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1J50X	-	VRD1J50MLX	LVR-IC	LDO, Dual out, Vo1=1.85V±20mV, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K08X	-	VRD1K08NLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K09X	-	VRD1K09NLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K0JX	-	VRD1K0JNLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K0KX	-	VRD1K0KNLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K10X	-	VRD1K10NLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1K11X	-	VRD1K11NLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K12X	-	VRD1K12NLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K13X	-	VRD1K13NLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K14X	-	VRD1K14NLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K15X	-	VRD1K15NLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K16X	-	VRD1K16NLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K17X	-	VRD1K17NLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K18X	-	VRD1K18NLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K19X	-	VRD1K19NLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K1AX	-	VRD1K1ANLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K1BX	-	VRD1K1BNLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K1CX	-	VRD1K1CNLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K1DX	-	VRD1K1DNLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K1EX	-	VRD1K1ENLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K1FX	-	VRD1K1FNLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K1GX	-	VRD1K1GNLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K1HX	-	VRD1K1HNLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K1JX	-	VRD1K1JNLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K1KX	-	VRD1K1KPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K20X	-	VRD1K20PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K21X	-	VRD1K21PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K22X	-	VRD1K22PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K23X	-	VRD1K23PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K24X	-	VRD1K24PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K25X	-	VRD1K25PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K26X	-	VRD1K26PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K27X	-	VRD1K27PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K28X	-	VRD1K28PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K29X	-	VRD1K29PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K2AX	-	VRD1K2APLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K2BX	-	VRD1K2BPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K2CX	-	VRD1K2CPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K2DX	-	VRD1K2DPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K2EX	-	VRD1K2EPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K2FX	-	VRD1K2FPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K2GX	-	VRD1K2GPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K2HX	-	VRD1K2HPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K2JX	-	VRD1K2JPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K2KX	-	VRD1K2KPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K30X	-	VRD1K30PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K31X	-	VRD1K31PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K32X	-	VRD1K32PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K33X	-	VRD1K33PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K34X	-	VRD1K34PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K35X	-	VRD1K35PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K36X	-	VRD1K36PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K37X	-	VRD1K37PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K38X	-	VRD1K38PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K39X	-	VRD1K39PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K3AX	-	VRD1K3APLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K3BX	-	VRD1K3BPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K3CX	-	VRD1K3CPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K3DX	-	VRD1K3DPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K3EX	-	VRD1K3EPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K3FX	-	VRD1K3FPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K3GX	-	VRD1K3GPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K3HX	-	VRD1K3HPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K3JX	-	VRD1K3JPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K3KX	-	VRD1K3KPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K40X	-	VRD1K40PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K41X	-	VRD1K41PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K42X	-	VRD1K42PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K43X	-	VRD1K43PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K44X	-	VRD1K44PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K45X	-	VRD1K45PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K46X	-	VRD1K46PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K47X	-	VRD1K47PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K48X	-	VRD1K48PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K49X	-	VRD1K49PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K4AX	-	VRD1K4APLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1K4BX	-	VRD1K4BPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K4CX	-	VRD1K4CPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K4DX	-	VRD1K4DPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K4EX	-	VRD1K4EPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K4FX	-	VRD1K4FPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K4GX	-	VRD1K4GPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K4HX	-	VRD1K4HPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K4JX	-	VRD1K4JPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K4KX	-	VRD1K4KPLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D1K50X	-	VRD1K50PLX	LVR-IC	LDO, Dual out, Vo1=1.95V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2	-	BZX884-C18	Z-diode	18V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
D2	-	LM4990ITL	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Nsc
D2	-	R3118K381A	Vdet-IC	3.8V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
D2	-	RP109L201B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
D2	-	SH4990ITL	Lin-IC	AF PA, BTL, 2.2..5.5V, 2W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Sit
D2	-	XC6221A3317R	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
D2	-	XC6223F12B9R-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
D2	-	XC6GC3202HR	Vdet-IC	3.2V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
D2	-	XC9245A10C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.0V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
D2	-	XPT4890ITL	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), shutdown	BGA-8A	39	AFP44	9m	Xpt
D2008X	-	VRD2008NLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2009X	-	VRD2009NLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D200JX	-	VRD200JNLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D200KX	-	VRD200KNLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2010X	-	VRD2010NLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2011X	-	VRD2011NLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2012X	-	VRD2012NLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2013X	-	VRD2013NLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2014X	-	VRD2014NLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2015X	-	VRD2015NLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2016X	-	VRD2016NLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2017X	-	VRD2017NLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2018X	-	VRD2018NLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2019X	-	VRD2019NLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D201AX	-	VRD201ANLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D201BX	-	VRD201BNLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D201CX	-	VRD201CNLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D201DX	-	VRD201DNLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D201EX	-	VRD201ENLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D201FX	-	VRD201FNLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D201GX	-	VRD201GNLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D201HX	-	VRD201HNLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D201JX	-	VRD201JNLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D201KX	-	VRD201KPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2020X	-	VRD2020PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2021X	-	VRD2021PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2022X	-	VRD2022PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2023X	-	VRD2023PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2024X	-	VRD2024PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2025X	-	VRD2025PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2026X	-	VRD2026PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2027X	-	VRD2027PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2028X	-	VRD2028PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2029X	-	VRD2029PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D202AX	-	VRD202APLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D202BX	-	VRD202BPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D202CX	-	VRD202CPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D202DX	-	VRD202DPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D202EX	-	VRD202EPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D202FX	-	VRD202FPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D202GX	-	VRD202GPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D202HX	-	VRD202HPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D202JX	-	VRD202JPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D202KX	-	VRD202KPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2030X	-	VRD2030PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2031X	-	VRD2031PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2032X	-	VRD2032PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2033X	-	VRD2033PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2034X	-	VRD2034PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2035X	-	VRD2035PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans




SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2036X	-	VRD2036PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2037X	-	VRD2037PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2038X	-	VRD2038PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2039X	-	VRD2039PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D203AX	-	VRD203APLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D203BX	-	VRD203BPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D203CX	-	VRD203CPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D203DX	-	VRD203DPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D203EX	-	VRD203EPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D203FX	-	VRD203FPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D203GX	-	VRD203GPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D203HX	-	VRD203HPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D203JX	-	VRD203JPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D203KX	-	VRD203KPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2040X	-	VRD2040PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2041X	-	VRD2041PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2042X	-	VRD2042PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2043X	-	VRD2043PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2044X	-	VRD2044PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2045X	-	VRD2045PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2046X	-	VRD2046PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2047X	-	VRD2047PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2048X	-	VRD2048PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2049X	-	VRD2049PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D204AX	-	VRD204APLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D204BX	-	VRD204BPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D204CX	-	VRD204CPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D204DX	-	VRD204DPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D204EX	-	VRD204EPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D204FX	-	VRD204FPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D204GX	-	VRD204GPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D204HX	-	VRD204HPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D204JX	-	VRD204JPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D204KX	-	VRD204KPLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2050X	-	VRD2050PLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D20A	-	RP506K201A	DC-DC-IC	PWM/VFM step-down, 2.0V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D20B	-	RP506K201B	DC-DC-IC	PWM/VFM step-down, 2.0V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D20D	-	RP506K201D	DC-DC-IC	PWM/VFM step-down, 2.0V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D20E	-	RP506K201E	DC-DC-IC	PWM/VFM step-down, 2.0V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D2108X	-	VRD2108NLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2109X	-	VRD2109NLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D210JX	-	VRD210JNLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D210KX	-	VRD210KNLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2110X	-	VRD2110NLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2111X	-	VRD2111NLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2112X	-	VRD2112NLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2113X	-	VRD2113NLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2114X	-	VRD2114NLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2115X	-	VRD2115NLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2116X	-	VRD2116NLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2117X	-	VRD2117NLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2118X	-	VRD2118NLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2119X	-	VRD2119NLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D211AX	-	VRD211ANLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D211BX	-	VRD211BNLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D211CX	-	VRD211CNLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D211DX	-	VRD211DNLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D211EX	-	VRD211ENLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D211FX	-	VRD211FNLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D211GX	-	VRD211GNLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D211HX	-	VRD211HNLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D211JX	-	VRD211JNLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D211KX	-	VRD211KPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2120X	-	VRD2120PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2121X	-	VRD2121PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2122X	-	VRD2122PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2123X	-	VRD2123PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2124X	-	VRD2124PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2125X	-	VRD2125PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2126X	-	VRD2126PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2127X	-	VRD2127PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2128X	-	VRD2128PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2129X	-	VRD2129PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D212AX	-	VRD212APLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D212BX	-	VRD212BPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D212CX	-	VRD212CPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D212DX	-	VRD212DPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D212EX	-	VRD212EPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D212FX	-	VRD212FPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D212GX	-	VRD212GPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D212HX	-	VRD212HPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D212JX	-	VRD212JPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D212KX	-	VRD212KPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2130X	-	VRD2130PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2131X	-	VRD2131PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2132X	-	VRD2132PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2133X	-	VRD2133PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2134X	-	VRD2134PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2135X	-	VRD2135PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2136X	-	VRD2136PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2137X	-	VRD2137PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2138X	-	VRD2138PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2139X	-	VRD2139PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D213AX	-	VRD213APLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D213BX	-	VRD213BPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D213CX	-	VRD213CPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D213DX	-	VRD213DPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D213EX	-	VRD213EPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D213FX	-	VRD213FPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D213GX	-	VRD213GPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D213HX	-	VRD213HPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D213JX	-	VRD213JPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D213KX	-	VRD213KPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2140X	-	VRD2140PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2141X	-	VRD2141PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2142X	-	VRD2142PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2143X	-	VRD2143PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2144X	-	VRD2144PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2145X	-	VRD2145PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2146X	-	VRD2146PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2147X	-	VRD2147PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2148X	-	VRD2148PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2149X	-	VRD2149PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D214AX	-	VRD214APLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D214BX	-	VRD214BPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D214CX	-	VRD214CPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D214DX	-	VRD214DPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D214EX	-	VRD214EPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D214FX	-	VRD214FPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D214GX	-	VRD214GPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D214HX	-	VRD214HPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D214JX	-	VRD214JPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D214KX	-	VRD214KPLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2150X	-	VRD2150PLX	LVR-IC	LDO, Dual out, Vo1=2.1V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D21A	-	RP506K211A	DC-DC-IC	PWM/VFM step-down, 2.1V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D21B	-	RP506K211B	DC-DC-IC	PWM/VFM step-down, 2.1V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D21D	-	RP506K211D	DC-DC-IC	PWM/VFM step-down, 2.1V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D21E	-	RP506K211E	DC-DC-IC	PWM/VFM step-down, 2.1V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D2208X	-	VRD2208NLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2209X	-	VRD2209NLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D220JX	-	VRD220JNLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D220KX	-	VRD220KNLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2210X	-	VRD2210NLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2211X	-	VRD2211NLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2212X	-	VRD2212NLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2213X	-	VRD2213NLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2214X	-	VRD2214NLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2215X	-	VRD2215NLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2216X	-	VRD2216NLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2217X	-	VRD2217NLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2218X	-	VRD2218NLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2219X	-	VRD2219NLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D221AX	-	VRD221ANLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D221BX	-	VRD221BNLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D221CX	-	VRD221CNLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D221DX	-	VRD221DNLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D221EX	-	VRD221ENLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D221FX	-	VRD221FNLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D221GX	-	VRD221GNLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D221HX	-	VRD221HNLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D221JX	-	VRD221JNLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D221KX	-	VRD221KPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2220X	-	VRD2220PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2221X	-	VRD2221PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2222X	-	VRD2222PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2223X	-	VRD2223PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2224X	-	VRD2224PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2225X	-	VRD2225PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2226X	-	VRD2226PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2227X	-	VRD2227PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2228X	-	VRD2228PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2229X	-	VRD2229PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D222AX	-	VRD222APLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D222BX	-	VRD222BPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D222CX	-	VRD222CPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D222DX	-	VRD222DPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D222EX	-	VRD222EPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D222FX	-	VRD222FPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D222GX	-	VRD222GPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D222HX	-	VRD222HPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D222JX	-	VRD222JPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D222KX	-	VRD222KPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2230X	-	VRD2230PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2231X	-	VRD2231PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2232X	-	VRD2232PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2233X	-	VRD2233PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2234X	-	VRD2234PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2235X	-	VRD2235PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2236X	-	VRD2236PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2237X	-	VRD2237PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2238X	-	VRD2238PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2239X	-	VRD2239PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D223AX	-	VRD223APLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D223BX	-	VRD223BPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D223CX	-	VRD223CPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D223DX	-	VRD223DPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D223EX	-	VRD223EPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D223FX	-	VRD223FPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D223GX	-	VRD223GPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D223HX	-	VRD223HPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D223JX	-	VRD223JPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D223KX	-	VRD223KPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2240X	-	VRD2240PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2241X	-	VRD2241PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2242X	-	VRD2242PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2243X	-	VRD2243PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2244X	-	VRD2244PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2245X	-	VRD2245PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2246X	-	VRD2246PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2247X	-	VRD2247PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2248X	-	VRD2248PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2249X	-	VRD2249PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D224AX	-	VRD224APLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D224BX	-	VRD224BPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D224CX	-	VRD224CPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D224DX	-	VRD224DPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D224EX	-	VRD224EPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D224FX	-	VRD224FPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D224GX	-	VRD224GPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D224HX	-	VRD224HPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D224JX	-	VRD224JPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D224KX	-	VRD224KPLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2250X	-	VRD2250PLX	LVR-IC	LDO, Dual out, Vo1=2.2V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D22A	-	RP506K221A	DC-DC-IC	PWM/VFM step-down, 2.2V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D22B	-	RP506K221B	DC-DC-IC	PWM/VFM step-down, 2.2V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D22D	-	RP506K221D	DC-DC-IC	PWM/VFM step-down, 2.2V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D22E	-	RP506K221E	DC-DC-IC	PWM/VFM step-down, 2.2V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D23	-	XC61GC3202HR	Vdet-IC	3.2V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
D2308X	-	VRD2308NLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2309X	-	VRD2309NLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D230JX	-	VRD230JNLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D230KX	-	VRD230KNLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2310X	-	VRD2310NLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2311X	-	VRD2311NLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2312X	-	VRD2312NLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2313X	-	VRD2313NLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2314X	-	VRD2314NLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2315X	-	VRD2315NLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2316X	-	VRD2316NLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2317X	-	VRD2317NLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2318X	-	VRD2318NLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2319X	-	VRD2319NLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D231AX	-	VRD231ANLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D231BX	-	VRD231BNLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D231CX	-	VRD231CNLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D231DX	-	VRD231DNLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D231EX	-	VRD231ENLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D231FX	-	VRD231FNLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D231GX	-	VRD231GNLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D231HX	-	VRD231HNLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D231JX	-	VRD231JNLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D231KX	-	VRD231KPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2320X	-	VRD2320PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2321X	-	VRD2321PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2322X	-	VRD2322PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2323X	-	VRD2323PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2324X	-	VRD2324PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2325X	-	VRD2325PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2326X	-	VRD2326PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2327X	-	VRD2327PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2328X	-	VRD2328PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2329X	-	VRD2329PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D232AX	-	VRD232APLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D232BX	-	VRD232BPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D232CX	-	VRD232CPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D232DX	-	VRD232DPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D232EX	-	VRD232EPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D232FX	-	VRD232FPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D232GX	-	VRD232GPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D232HX	-	VRD232HPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D232JX	-	VRD232JPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D232KX	-	VRD232KPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2330X	-	VRD2330PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2331X	-	VRD2331PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2332X	-	VRD2332PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2333X	-	VRD2333PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2334X	-	VRD2334PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2335X	-	VRD2335PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2336X	-	VRD2336PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2337X	-	VRD2337PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2338X	-	VRD2338PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2339X	-	VRD2339PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D233AX	-	VRD233APLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D233BX	-	VRD233BPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D233CX	-	VRD233CPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D233DX	-	VRD233DPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D233EX	-	VRD233EPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D233FX	-	VRD233FPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D233GX	-	VRD233GPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D233HX	-	VRD233HPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D233JX	-	VRD233JPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D233KX	-	VRD233KPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2340X	-	VRD2340PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2341X	-	VRD2341PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2342X	-	VRD2342PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2343X	-	VRD2343PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2344X	-	VRD2344PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2345X	-	VRD2345PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2346X	-	VRD2346PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2347X	-	VRD2347PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2348X	-	VRD2348PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2349X	-	VRD2349PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D234AX	-	VRD234APLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D234BX	-	VRD234BPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D234CX	-	VRD234CPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D234DX	-	VRD234DPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D234EX	-	VRD234EPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D234FX	-	VRD234FPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D234GX	-	VRD234GPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D234HX	-	VRD234HPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D234JX	-	VRD234JPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D234KX	-	VRD234KPLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2350X	-	VRD2350PLX	LVR-IC	LDO, Dual out, Vo1=2.3V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D23A	-	RP506K231A	DC-DC-IC	PWM/VFM step-down, 2.3V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D23B	-	RP506K231B	DC-DC-IC	PWM/VFM step-down, 2.3V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D23D	-	RP506K231D	DC-DC-IC	PWM/VFM step-down, 2.3V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D23E	-	RP506K231E	DC-DC-IC	PWM/VFM step-down, 2.3V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D2408X	-	VRD2408NLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2409X	-	VRD2409NLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D240JX	-	VRD240JNLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D240KX	-	VRD240KNLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2410X	-	VRD2410NLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2411X	-	VRD2411NLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2412X	-	VRD2412NLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2413X	-	VRD2413NLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2414X	-	VRD2414NLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2415X	-	VRD2415NLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2416X	-	VRD2416NLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2417X	-	VRD2417NLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2418X	-	VRD2418NLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2419X	-	VRD2419NLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D241AX	-	VRD241ANLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D241BX	-	VRD241BNLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D241CX	-	VRD241CNLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D241DX	-	VRD241DNLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D241EX	-	VRD241ENLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D241FX	-	VRD241FNLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D241GX	-	VRD241GNLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D241HX	-	VRD241HNLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D241JX	-	VRD241JNLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D241KX	-	VRD241KPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2420X	-	VRD2420PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2421X	-	VRD2421PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2422X	-	VRD2422PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2423X	-	VRD2423PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2424X	-	VRD2424PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2425X	-	VRD2425PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2426X	-	VRD2426PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2427X	-	VRD2427PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2428X	-	VRD2428PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2429X	-	VRD2429PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D242AX	-	VRD242APLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D242BX	-	VRD242BPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D242CX	-	VRD242CPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D242DX	-	VRD242DPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D242EX	-	VRD242EPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D242FX	-	VRD242FPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D242GX	-	VRD242GPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D242HX	-	VRD242HPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D242JX	-	VRD242JPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D242KX	-	VRD242KPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2430X	-	VRD2430PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2431X	-	VRD2431PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2432X	-	VRD2432PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2433X	-	VRD2433PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2434X	-	VRD2434PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2435X	-	VRD2435PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2436X	-	VRD2436PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2437X	-	VRD2437PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2438X	-	VRD2438PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2439X	-	VRD2439PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D243AX	-	VRD243APLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D243BX	-	VRD243BPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D243CX	-	VRD243CPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D243DX	-	VRD243DPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D243EX	-	VRD243EPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D243FX	-	VRD243FPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D243GX	-	VRD243GPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D243HX	-	VRD243HPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D243JX	-	VRD243JPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D243KX	-	VRD243KPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2440X	-	VRD2440PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2441X	-	VRD2441PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2442X	-	VRD2442PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2443X	-	VRD2443PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2444X	-	VRD2444PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2445X	-	VRD2445PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2446X	-	VRD2446PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2447X	-	VRD2447PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2448X	-	VRD2448PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2449X	-	VRD2449PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D244AX	-	VRD244APLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D244BX	-	VRD244BPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D244CX	-	VRD244CPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D244DX	-	VRD244DPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D244EX	-	VRD244EPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D244FX	-	VRD244FPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D244GX	-	VRD244GPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D244HX	-	VRD244HPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D244JX	-	VRD244JPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D244KX	-	VRD244KPLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2450X	-	VRD2450PLX	LVR-IC	LDO, Dual out, Vo1=2.4V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D24A	-	RP506K241A	DC-DC-IC	PWM/VFM step-down, 2.4V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D24B	-	RP506K241B	DC-DC-IC	PWM/VFM step-down, 2.4V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D24D	-	RP506K241D	DC-DC-IC	PWM/VFM step-down, 2.4V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D24E	-	RP506K241E	DC-DC-IC	PWM/VFM step-down, 2.4V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D2508X	-	VRD2508NLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2509X	-	VRD2509NLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D250JX	-	VRD250JNLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D250KX	-	VRD250KNLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2510X	-	VRD2510NLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2511X	-	VRD2511NLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2512X	-	VRD2512NLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2513X	-	VRD2513NLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2514X	-	VRD2514NLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2515X	-	VRD2515NLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2516X	-	VRD2516NLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2517X	-	VRD2517NLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2518X	-	VRD2518NLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2519X	-	VRD2519NLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D251AX	-	VRD251ANLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D251BX	-	VRD251BNLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D251CX	-	VRD251CNLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D251DX	-	VRD251DNLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D251EX	-	VRD251ENLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D251FX	-	VRD251FNLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D251GX	-	VRD251GNLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D251HX	-	VRD251HNLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D251JX	-	VRD251JNLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D251KX	-	VRD251KPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2520X	-	VRD2520PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2521X	-	VRD2521PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2522X	-	VRD2522PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2523X	-	VRD2523PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2524X	-	VRD2524PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2525X	-	VRD2525PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2526X	-	VRD2526PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2527X	-	VRD2527PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2528X	-	VRD2528PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2529X	-	VRD2529PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D252AX	-	VRD252APLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D252BX	-	VRD252BPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D252CX	-	VRD252CPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D252DX	-	VRD252DPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D252EX	-	VRD252EPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D252FX	-	VRD252FPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D252GX	-	VRD252GPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D252HX	-	VRD252HPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D252JX	-	VRD252JPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D252KX	-	VRD252KPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2530X	-	VRD2530PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2531X	-	VRD2531PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2532X	-	VRD2532PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2533X	-	VRD2533PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2534X	-	VRD2534PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2535X	-	VRD2535PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2536X	-	VRD2536PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2537X	-	VRD2537PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2538X	-	VRD2538PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2539X	-	VRD2539PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D253AX	-	VRD253APLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D253BX	-	VRD253BPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D253CX	-	VRD253CPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D253DX	-	VRD253DPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D253EX	-	VRD253EPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D253FX	-	VRD253FPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D253GX	-	VRD253GPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D253HX	-	VRD253HPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D253JX	-	VRD253JPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D253KX	-	VRD253KPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2540X	-	VRD2540PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2541X	-	VRD2541PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2542X	-	VRD2542PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2543X	-	VRD2543PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2544X	-	VRD2544PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2545X	-	VRD2545PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2546X	-	VRD2546PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2547X	-	VRD2547PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2548X	-	VRD2548PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2549X	-	VRD2549PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D254AX	-	VRD254APLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D254BX	-	VRD254BPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D254CX	-	VRD254CPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D254DX	-	VRD254DPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D254EX	-	VRD254EPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D254FX	-	VRD254FPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D254GX	-	VRD254GPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D254HX	-	VRD254HPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D254JX	-	VRD254JPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D254KX	-	VRD254KPLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2550X	-	VRD2550PLX	LVR-IC	LDO, Dual out, Vo1=2.5V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D25A	-	RP506K251A	DC-DC-IC	PWM/VFM step-down, 2.5V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D25B	-	RP506K251B	DC-DC-IC	PWM/VFM step-down, 2.5V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D25D	-	RP506K251D	DC-DC-IC	PWM/VFM step-down, 2.5V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D25E	-	RP506K251E	DC-DC-IC	PWM/VFM step-down, 2.5V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D2608X	-	VRD2608NLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2609X	-	VRD2609NLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D260JX	-	VRD260JNLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D260KX	-	VRD260KNLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2610X	-	VRD2610NLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2611X	-	VRD2611NLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2612X	-	VRD2612NLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2613X	-	VRD2613NLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2614X	-	VRD2614NLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2615X	-	VRD2615NLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2616X	-	VRD2616NLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2617X	-	VRD2617NLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2618X	-	VRD2618NLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2619X	-	VRD2619NLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D261AX	-	VRD261ANLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D261BX	-	VRD261BNLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D261CX	-	VRD261CNLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D261DX	-	VRD261DNLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D261EX	-	VRD261ENLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D261FX	-	VRD261FNLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D261GX	-	VRD261GNLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D261HX	-	VRD261HNLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D261JX	-	VRD261JNLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D261KX	-	VRD261KPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2620X	-	VRD2620PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2621X	-	VRD2621PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2622X	-	VRD2622PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2623X	-	VRD2623PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2624X	-	VRD2624PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2625X	-	VRD2625PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2626X	-	VRD2626PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2627X	-	VRD2627PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2628X	-	VRD2628PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2629X	-	VRD2629PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D262AX	-	VRD262APLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D262BX	-	VRD262BPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D262CX	-	VRD262CPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D262DX	-	VRD262DPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D262EX	-	VRD262EPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D262FX	-	VRD262FPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D262GX	-	VRD262GPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D262HX	-	VRD262HPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D262JX	-	VRD262JPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D262KX	-	VRD262KPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2630X	-	VRD2630PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2631X	-	VRD2631PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2632X	-	VRD2632PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2633X	-	VRD2633PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2634X	-	VRD2634PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2635X	-	VRD2635PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2636X	-	VRD2636PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2637X	-	VRD2637PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2638X	-	VRD2638PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2639X	-	VRD2639PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D263AX	-	VRD263APLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D263BX	-	VRD263BPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D263CX	-	VRD263CPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D263DX	-	VRD263DPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D263EX	-	VRD263EPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D263FX	-	VRD263FPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D263GX	-	VRD263GPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D263HX	-	VRD263HPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D263JX	-	VRD263JPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D263KX	-	VRD263KPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2640X	-	VRD2640PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2641X	-	VRD2641PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2642X	-	VRD2642PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2643X	-	VRD2643PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2644X	-	VRD2644PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2645X	-	VRD2645PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2646X	-	VRD2646PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2647X	-	VRD2647PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2648X	-	VRD2648PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2649X	-	VRD2649PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D264AX	-	VRD264APLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D264BX	-	VRD264BPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D264CX	-	VRD264CPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D264DX	-	VRD264DPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D264EX	-	VRD264EPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D264FX	-	VRD264FPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D264GX	-	VRD264GPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D264HX	-	VRD264HPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D264JX	-	VRD264JPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D264KX	-	VRD264KPLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2650X	-	VRD2650PLX	LVR-IC	LDO, Dual out, Vo1=2.6V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D26A	-	RP506K261A	DC-DC-IC	PWM/VFM step-down, 2.6V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D26B	-	RP506K261B	DC-DC-IC	PWM/VFM step-down, 2.6V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D26D	-	RP506K261D	DC-DC-IC	PWM/VFM step-down, 2.6V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D26E	-	RP506K261E	DC-DC-IC	PWM/VFM step-down, 2.6V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D2708X	-	VRD2708NLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2709X	-	VRD2709NLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D270JX	-	VRD270JNLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D270KX	-	VRD270KNLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2710X	-	VRD2710NLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2711X	-	VRD2711NLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2712X	-	VRD2712NLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2713X	-	VRD2713NLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2714X	-	VRD2714NLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2715X	-	VRD2715NLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2716X	-	VRD2716NLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2717X	-	VRD2717NLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2718X	-	VRD2718NLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2719X	-	VRD2719NLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D271AX	-	VRD271ANLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D271BX	-	VRD271BNLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D271CX	-	VRD271CNLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D271DX	-	VRD271DNLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D271EX	-	VRD271ENLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D271FX	-	VRD271FNLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D271GX	-	VRD271GNLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D271HX	-	VRD271HNLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D271JX	-	VRD271JNLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D271KX	-	VRD271KPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2720X	-	VRD2720PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2721X	-	VRD2721PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2722X	-	VRD2722PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2723X	-	VRD2723PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2724X	-	VRD2724PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2725X	-	VRD2725PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2726X	-	VRD2726PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2727X	-	VRD2727PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2728X	-	VRD2728PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2729X	-	VRD2729PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D272AX	-	VRD272APLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D272BX	-	VRD272BPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D272CX	-	VRD272CPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D272DX	-	VRD272DPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D272EX	-	VRD272EPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D272FX	-	VRD272FPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D272GX	-	VRD272GPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D272HX	-	VRD272HPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D272JX	-	VRD272JPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D272KX	-	VRD272KPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2730X	-	VRD2730PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2731X	-	VRD2731PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2732X	-	VRD2732PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2733X	-	VRD2733PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2734X	-	VRD2734PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2735X	-	VRD2735PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2736X	-	VRD2736PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2737X	-	VRD2737PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2738X	-	VRD2738PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2739X	-	VRD2739PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D273AX	-	VRD273APLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D273BX	-	VRD273BPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D273CX	-	VRD273CPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D273DX	-	VRD273DPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D273EX	-	VRD273EPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D273FX	-	VRD273FPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D273GX	-	VRD273GPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D273HX	-	VRD273HPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D273JX	-	VRD273JPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D273KX	-	VRD273KPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2740X	-	VRD2740PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2741X	-	VRD2741PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2742X	-	VRD2742PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2743X	-	VRD2743PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2744X	-	VRD2744PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2745X	-	VRD2745PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2746X	-	VRD2746PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2747X	-	VRD2747PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2748X	-	VRD2748PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2749X	-	VRD2749PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D274AX	-	VRD274APLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D274BX	-	VRD274BPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D274CX	-	VRD274CPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D274DX	-	VRD274DPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D274EX	-	VRD274EPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D274FX	-	VRD274FPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D274GX	-	VRD274GPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D274HX	-	VRD274HPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D274JX	-	VRD274JPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D274KX	-	VRD274KPLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2750X	-	VRD2750PLX	LVR-IC	LDO, Dual out, Vo1=2.7V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D27A	-	RP506K271A	DC-DC-IC	PWM/VFM step-down, 2.7V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D27B	-	RP506K271B	DC-DC-IC	PWM/VFM step-down, 2.7V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D27D	-	RP506K271D	DC-DC-IC	PWM/VFM step-down, 2.7V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D27E	-	RP506K271E	DC-DC-IC	PWM/VFM step-down, 2.8V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D2808X	-	VRD2808NLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2809X	-	VRD2809NLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D280JX	-	VRD280JNLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D280KX	-	VRD280KNLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2810X	-	VRD2810NLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2811X	-	VRD2811NLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2812X	-	VRD2812NLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2813X	-	VRD2813NLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2814X	-	VRD2814NLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2815X	-	VRD2815NLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2816X	-	VRD2816NLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2817X	-	VRD2817NLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2818X	-	VRD2818NLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2819X	-	VRD2819NLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D281AX	-	VRD281ANLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D281BX	-	VRD281BNLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D281CX	-	VRD281CNLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D281DX	-	VRD281DNLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D281EX	-	VRD281ENLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D281FX	-	VRD281FNLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D281GX	-	VRD281GNLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D281HX	-	VRD281HNLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D281JX	-	VRD281JNLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D281KX	-	VRD281KPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2820X	-	VRD2820PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2821X	-	VRD2821PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2822X	-	VRD2822PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2823X	-	VRD2823PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2824X	-	VRD2824PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2825X	-	VRD2825PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2826X	-	VRD2826PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2827X	-	VRD2827PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2828X	-	VRD2828PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2829X	-	VRD2829PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D282AX	-	VRD282APLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D282BX	-	VRD282BPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D282CX	-	VRD282CPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D282DX	-	VRD282DPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D282EX	-	VRD282EPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D282FX	-	VRD282FPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D282GX	-	VRD282GPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D282HX	-	VRD282HPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D282JX	-	VRD282JPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D282KX	-	VRD282KPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2830X	-	VRD2830PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2831X	-	VRD2831PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2832X	-	VRD2832PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2833X	-	VRD2833PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2834X	-	VRD2834PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2835X	-	VRD2835PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2836X	-	VRD2836PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2837X	-	VRD2837PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2838X	-	VRD2838PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2839X	-	VRD2839PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D283AX	-	VRD283APLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D283BX	-	VRD283BPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D283CX	-	VRD283CPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D283DX	-	VRD283DPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D283EX	-	VRD283EPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D283FX	-	VRD283FPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D283GX	-	VRD283GPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D283HX	-	VRD283HPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D283JX	-	VRD283JPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D283KX	-	VRD283KPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2840X	-	VRD2840PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2841X	-	VRD2841PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2842X	-	VRD2842PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2843X	-	VRD2843PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2844X	-	VRD2844PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2845X	-	VRD2845PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2846X	-	VRD2846PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2847X	-	VRD2847PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2848X	-	VRD2848PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2849X	-	VRD2849PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D284AX	-	VRD284APLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D284BX	-	VRD284BPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D284CX	-	VRD284CPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D284DX	-	VRD284DPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D284EX	-	VRD284EPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D284FX	-	VRD284FPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D284GX	-	VRD284GPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D284HX	-	VRD284HPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D284JX	-	VRD284JPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D284KX	-	VRD284KPLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2850X	-	VRD2850PLX	LVR-IC	LDO, Dual out, Vo1=2.8V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D28A	-	RP506K281A	DC-DC-IC	PWM/VFM step-down, 2.8V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D28B	-	RP506K281B	DC-DC-IC	PWM/VFM step-down, 2.8V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D28D	-	RP506K281D	DC-DC-IC	PWM/VFM step-down, 2.8V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D28E	-	RP506K281E	DC-DC-IC	PWM/VFM step-down, 2.8V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D2908X	-	VRD2908NLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2909X	-	VRD2909NLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D290JX	-	VRD290JNLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D290KX	-	VRD290KNLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2910X	-	VRD2910NLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2911X	-	VRD2911NLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2912X	-	VRD2912NLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2913X	-	VRD2913NLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2914X	-	VRD2914NLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2915X	-	VRD2915NLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2916X	-	VRD2916NLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2917X	-	VRD2917NLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2918X	-	VRD2918NLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2919X	-	VRD2919NLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D291AX	-	VRD291ANLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D291BX	-	VRD291BNLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D291CX	-	VRD291CNLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D291DX	-	VRD291DNLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D291EX	-	VRD291ENLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D291FX	-	VRD291FNLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D291GX	-	VRD291GNLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D291HX	-	VRD291HNLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D291JX	-	VRD291JNLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D291KX	-	VRD291KPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2920X	-	VRD2920PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2921X	-	VRD2921PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2922X	-	VRD2922PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2923X	-	VRD2923PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2924X	-	VRD2924PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2925X	-	VRD2925PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2926X	-	VRD2926PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2927X	-	VRD2927PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2928X	-	VRD2928PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2929X	-	VRD2929PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D292AX	-	VRD292APLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D292BX	-	VRD292BPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D292CX	-	VRD292CPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D292DX	-	VRD292DPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D292EX	-	VRD292EPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D292FX	-	VRD292FPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D292GX	-	VRD292GPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D292HX	-	VRD292HPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D292JX	-	VRD292JPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D292KX	-	VRD292KPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2930X	-	VRD2930PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2931X	-	VRD2931PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2932X	-	VRD2932PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2933X	-	VRD2933PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2934X	-	VRD2934PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2935X	-	VRD2935PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2936X	-	VRD2936PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2937X	-	VRD2937PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2938X	-	VRD2938PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2939X	-	VRD2939PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D293AX	-	VRD293APLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D293BX	-	VRD293BPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D293CX	-	VRD293CPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D293DX	-	VRD293DPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D293EX	-	VRD293EPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D293FX	-	VRD293FPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D293GX	-	VRD293GPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D293HX	-	VRD293HPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D293JX	-	VRD293JPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D293KX	-	VRD293KPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2940X	-	VRD2940PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2941X	-	VRD2941PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2942X	-	VRD2942PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2943X	-	VRD2943PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2944X	-	VRD2944PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2945X	-	VRD2945PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2946X	-	VRD2946PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2947X	-	VRD2947PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2948X	-	VRD2948PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2949X	-	VRD2949PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D294AX	-	VRD294APLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D294BX	-	VRD294BPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D294CX	-	VRD294CPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D294DX	-	VRD294DPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D294EX	-	VRD294EPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D294FX	-	VRD294FPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D294GX	-	VRD294GPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D294HX	-	VRD294HPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D294JX	-	VRD294JPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D294KX	-	VRD294KPLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2950X	-	VRD2950PLX	LVR-IC	LDO, Dual out, Vo1=2.9V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D29A	-	RP506K291A	DC-DC-IC	PWM/VFM step-down, 2.9V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D29B	-	RP506K291B	DC-DC-IC	PWM/VFM step-down, 2.9V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D29D	-	RP506K291D	DC-DC-IC	PWM/VFM step-down, 2.9V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D29E	-	RP506K291E	DC-DC-IC	PWM/VFM step-down, 2.9V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D2A	-	XC6108C32AGR	Vdet-IC	3.2V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D2A08X	-	VRD2A08NLX	LVR-IC	LDO, Dual out, Vo1=2.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A09X	-	VRD2A09NLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A0JX	-	VRD2A0JNLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A0KX	-	VRD2A0KNLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A10X	-	VRD2A10NLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A11X	-	VRD2A11NLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A12X	-	VRD2A12NLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A13X	-	VRD2A13NLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A14X	-	VRD2A14NLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A15X	-	VRD2A15NLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A16X	-	VRD2A16NLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A17X	-	VRD2A17NLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A18X	-	VRD2A18NLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A19X	-	VRD2A19NLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A1AX	-	VRD2A1ANLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A1BX	-	VRD2A1BNLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A1CX	-	VRD2A1CNLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A1DX	-	VRD2A1DNLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A1EX	-	VRD2A1ENLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A1FX	-	VRD2A1FNLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A1GX	-	VRD2A1GNLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A1HX	-	VRD2A1HNLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A1JX	-	VRD2A1JNLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A1KX	-	VRD2A1KPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A20X	-	VRD2A20PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A21X	-	VRD2A21PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A22X	-	VRD2A22PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A23X	-	VRD2A23PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A24X	-	VRD2A24PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A25X	-	VRD2A25PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A26X	-	VRD2A26PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A27X	-	VRD2A27PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A28X	-	VRD2A28PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A29X	-	VRD2A29PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A2AX	-	VRD2A2APLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A2BX	-	VRD2A2BPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A2CX	-	VRD2A2CPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A2DX	-	VRD2A2DPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A2EX	-	VRD2A2EPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A2FX	-	VRD2A2FPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A2GX	-	VRD2A2GPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A2HX	-	VRD2A2HPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A2JX	-	VRD2A2JPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A2KX	-	VRD2A2KPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A30X	-	VRD2A30PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A31X	-	VRD2A31PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A32X	-	VRD2A32PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A33X	-	VRD2A33PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A34X	-	VRD2A34PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A35X	-	VRD2A35PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A36X	-	VRD2A36PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A37X	-	VRD2A37PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A38X	-	VRD2A38PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A39X	-	VRD2A39PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A3AX	-	VRD2A3APLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A3BX	-	VRD2A3BPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A3CX	-	VRD2A3CPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A3DX	-	VRD2A3DPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A3EX	-	VRD2A3EPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A3FX	-	VRD2A3FPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A3GX	-	VRD2A3GPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A3HX	-	VRD2A3HPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A3JX	-	VRD2A3JPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A3KX	-	VRD2A3KPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A40X	-	VRD2A40PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A41X	-	VRD2A41PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A42X	-	VRD2A42PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A43X	-	VRD2A43PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2A44X	-	VRD2A44PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A45X	-	VRD2A45PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A46X	-	VRD2A46PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A47X	-	VRD2A47PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A48X	-	VRD2A48PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A49X	-	VRD2A49PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A4AX	-	VRD2A4APLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A4BX	-	VRD2A4BPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A4CX	-	VRD2A4CPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A4DX	-	VRD2A4DPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A4EX	-	VRD2A4EPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A4FX	-	VRD2A4FPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A4GX	-	VRD2A4GPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A4HX	-	VRD2A4HPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A4JX	-	VRD2A4JPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A4KX	-	VRD2A4KPLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2A50X	-	VRD2A50PLX	LVR-IC	LDO, Dual out, Vo1=2.05V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B	-	XC6108C32BGR	Vdet-IC	3.2V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D2B08X	-	VRD2B08NLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B09X	-	VRD2B09NLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B0JX	-	VRD2B0JNLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B0KX	-	VRD2B0KNLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B10X	-	VRD2B10NLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B11X	-	VRD2B11NLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B12X	-	VRD2B12NLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B13X	-	VRD2B13NLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B14X	-	VRD2B14NLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B15X	-	VRD2B15NLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B16X	-	VRD2B16NLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B17X	-	VRD2B17NLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B18X	-	VRD2B18NLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B19X	-	VRD2B19NLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B1AX	-	VRD2B1ANLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B1BX	-	VRD2B1BNLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B1CX	-	VRD2B1CNLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B1DX	-	VRD2B1DNLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B1EX	-	VRD2B1ENLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B1FX	-	VRD2B1FNLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B1GX	-	VRD2B1GNLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B1HX	-	VRD2B1HNLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B1JX	-	VRD2B1JNLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B1KX	-	VRD2B1KPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B20X	-	VRD2B20PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B21X	-	VRD2B21PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B22X	-	VRD2B22PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B23X	-	VRD2B23PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B24X	-	VRD2B24PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B25X	-	VRD2B25PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B26X	-	VRD2B26PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B27X	-	VRD2B27PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B28X	-	VRD2B28PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B29X	-	VRD2B29PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B2AX	-	VRD2B2APLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B2BX	-	VRD2B2BPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B2CX	-	VRD2B2CPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B2DX	-	VRD2B2DPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B2EX	-	VRD2B2EPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B2FX	-	VRD2B2FPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B2GX	-	VRD2B2GPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B2HX	-	VRD2B2HPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B2JX	-	VRD2B2JPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B2KX	-	VRD2B2KPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B30X	-	VRD2B30PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B31X	-	VRD2B31PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B32X	-	VRD2B32PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B33X	-	VRD2B33PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B34X	-	VRD2B34PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B35X	-	VRD2B35PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B36X	-	VRD2B36PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B37X	-	VRD2B37PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2B38X	-	VRD2B38PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B39X	-	VRD2B39PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B3AX	-	VRD2B3APLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B3BX	-	VRD2B3BPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B3CX	-	VRD2B3CPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B3DX	-	VRD2B3DPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B3EX	-	VRD2B3EPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B3FX	-	VRD2B3FPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B3GX	-	VRD2B3GPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B3HX	-	VRD2B3HPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B3JX	-	VRD2B3JPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B3KX	-	VRD2B3KPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B40X	-	VRD2B40PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B41X	-	VRD2B41PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B42X	-	VRD2B42PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B43X	-	VRD2B43PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B44X	-	VRD2B44PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B45X	-	VRD2B45PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B46X	-	VRD2B46PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B47X	-	VRD2B47PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B48X	-	VRD2B48PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B49X	-	VRD2B49PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B4AX	-	VRD2B4APLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B4BX	-	VRD2B4BPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B4CX	-	VRD2B4CPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B4DX	-	VRD2B4DPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B4EX	-	VRD2B4EPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B4FX	-	VRD2B4FPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B4GX	-	VRD2B4GPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B4HX	-	VRD2B4HPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B4JX	-	VRD2B4JPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B4KX	-	VRD2B4KPLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2B50X	-	VRD2B50PLX	LVR-IC	LDO, Dual out, Vo1=2.15V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C	-	XC6108C32CGR	Vdet-IC	3.2V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D2C08X	-	VRD2C08NLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C09X	-	VRD2C09NLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C0JX	-	VRD2C0JNLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C0KX	-	VRD2C0KNLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C10X	-	VRD2C10NLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C11X	-	VRD2C11NLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C12X	-	VRD2C12NLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C13X	-	VRD2C13NLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C14X	-	VRD2C14NLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C15X	-	VRD2C15NLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C16X	-	VRD2C16NLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C17X	-	VRD2C17NLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C18X	-	VRD2C18NLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C19X	-	VRD2C19NLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C1AX	-	VRD2C1ANLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C1BX	-	VRD2C1BNLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C1CX	-	VRD2C1CNLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C1DX	-	VRD2C1DNLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C1EX	-	VRD2C1ENLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C1FX	-	VRD2C1FNLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C1GX	-	VRD2C1GNLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C1HX	-	VRD2C1HNLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C1JX	-	VRD2C1JNLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C1KX	-	VRD2C1KPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C20X	-	VRD2C20PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C21X	-	VRD2C21PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C22X	-	VRD2C22PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C23X	-	VRD2C23PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C24X	-	VRD2C24PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C25X	-	VRD2C25PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C26X	-	VRD2C26PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C27X	-	VRD2C27PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C28X	-	VRD2C28PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C29X	-	VRD2C29PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C2AX	-	VRD2C2APLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C2BX	-	VRD2C2BPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2C2CX	-	VRD2C2CPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C2DX	-	VRD2C2DPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C2EX	-	VRD2C2EPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C2FX	-	VRD2C2FPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C2GX	-	VRD2C2GPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C2HX	-	VRD2C2HPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C2JX	-	VRD2C2JPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C2KX	-	VRD2C2KPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C30X	-	VRD2C30PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C31X	-	VRD2C31PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C32X	-	VRD2C32PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C33X	-	VRD2C33PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C34X	-	VRD2C34PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C35X	-	VRD2C35PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C36X	-	VRD2C36PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C37X	-	VRD2C37PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C38X	-	VRD2C38PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C39X	-	VRD2C39PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C3AX	-	VRD2C3APLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C3BX	-	VRD2C3BPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C3CX	-	VRD2C3CPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C3DX	-	VRD2C3DPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C3EX	-	VRD2C3EPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C3FX	-	VRD2C3FPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C3GX	-	VRD2C3GPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C3HX	-	VRD2C3HPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C3JX	-	VRD2C3JPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C3KX	-	VRD2C3KPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C40X	-	VRD2C40PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C41X	-	VRD2C41PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C42X	-	VRD2C42PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C43X	-	VRD2C43PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C44X	-	VRD2C44PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C45X	-	VRD2C45PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C46X	-	VRD2C46PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C47X	-	VRD2C47PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C48X	-	VRD2C48PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C49X	-	VRD2C49PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C4AX	-	VRD2C4APLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C4BX	-	VRD2C4BPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C4CX	-	VRD2C4CPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C4DX	-	VRD2C4DPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C4EX	-	VRD2C4EPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C4FX	-	VRD2C4FPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C4GX	-	VRD2C4GPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C4HX	-	VRD2C4HPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C4JX	-	VRD2C4JPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C4KX	-	VRD2C4KPLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2C50X	-	VRD2C50PLX	LVR-IC	LDO, Dual out, Vo1=2.25V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D	-	XC6108C32DGR	Vdet-IC	3.2V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D2D08X	-	VRD2D08NLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D09X	-	VRD2D09NLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D0JX	-	VRD2D0JNLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D0KX	-	VRD2D0KNLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D10X	-	VRD2D10NLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D11X	-	VRD2D11NLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D12X	-	VRD2D12NLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D13X	-	VRD2D13NLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D14X	-	VRD2D14NLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D16X	-	VRD2D16NLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D17X	-	VRD2D17NLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D18X	-	VRD2D18NLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D19X	-	VRD2D19NLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D1AX	-	VRD2D1ANLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D1BX	-	VRD2D1BNLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D1CX	-	VRD2D1CNLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D1DX	-	VRD2D1DNLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D1GX	-	VRD2D1GNLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D1HX	-	VRD2D1HNLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D1JX	-	VRD2D1JNLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2D1KX	-	VRD2D1KPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D20X	-	VRD2D20PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D21X	-	VRD2D21PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D22X	-	VRD2D22PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D23X	-	VRD2D23PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D24X	-	VRD2D24PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D25X	-	VRD2D25PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D26X	-	VRD2D26PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D27X	-	VRD2D27PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D28X	-	VRD2D28PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D29X	-	VRD2D29PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D2AX	-	VRD2D2APLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D2BX	-	VRD2D2BPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D2CX	-	VRD2D2CPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D2DX	-	VRD2D2DPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D2EX	-	VRD2D2EPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D2FX	-	VRD2D2FPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D2GX	-	VRD2D2GPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D2HX	-	VRD2D2HPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D2JX	-	VRD2D2JPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D2KX	-	VRD2D2KPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D30X	-	VRD2D30PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D31X	-	VRD2D31PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D32X	-	VRD2D32PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D33X	-	VRD2D33PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D34X	-	VRD2D34PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D35X	-	VRD2D35PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D36X	-	VRD2D36PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D37X	-	VRD2D37PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D38X	-	VRD2D38PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D39X	-	VRD2D39PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D3AX	-	VRD2D3APLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D3BX	-	VRD2D3BPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D3CX	-	VRD2D3CPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D3DX	-	VRD2D3DPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D3EX	-	VRD2D3EPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D3FX	-	VRD2D3FPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D3GX	-	VRD2D3GPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D3HX	-	VRD2D3HPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D3JX	-	VRD2D3JPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D3KX	-	VRD2D3KPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D40X	-	VRD2D40PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D41X	-	VRD2D41PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D42X	-	VRD2D42PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D43X	-	VRD2D43PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D44X	-	VRD2D44PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D45X	-	VRD2D45PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D46X	-	VRD2D46PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D47X	-	VRD2D47PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D48X	-	VRD2D48PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D49X	-	VRD2D49PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D4AX	-	VRD2D4APLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D4BX	-	VRD2D4BPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D4CX	-	VRD2D4CPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D4DX	-	VRD2D4DPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D4EX	-	VRD2D4EPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D4FX	-	VRD2D4FPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D4GX	-	VRD2D4GPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D4HX	-	VRD2D4HPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D4JX	-	VRD2D4JPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D4KX	-	VRD2D4KPLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D50X	-	VRD2D50PLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2D5X	-	VRD2D15NLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2DEX	-	VRD2D1ENLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2DFX	-	VRD2D1FNLX	LVR-IC	LDO, Dual out, Vo1=2.35V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E08X	-	VRD2E08NLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E09X	-	VRD2E09NLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E0JX	-	VRD2E0JNLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E0KX	-	VRD2E0KNLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E10X	-	VRD2E10NLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2E11X	-	VRD2E11NLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E12X	-	VRD2E12NLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E13X	-	VRD2E13NLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E14X	-	VRD2E14NLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E15X	-	VRD2E15NLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E16X	-	VRD2E16NLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E17X	-	VRD2E17NLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E18X	-	VRD2E18NLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E19X	-	VRD2E19NLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E1AX	-	VRD2E1ANLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E1BX	-	VRD2E1BNLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E1CX	-	VRD2E1CNLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E1DX	-	VRD2E1DNLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E1EX	-	VRD2E1ENLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E1FX	-	VRD2E1FNLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E1GX	-	VRD2E1GNLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E1HX	-	VRD2E1HNLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E1JX	-	VRD2E1JNLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E1KX	-	VRD2E1KPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E20X	-	VRD2E20PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E21X	-	VRD2E21PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E22X	-	VRD2E22PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E23X	-	VRD2E23PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E24X	-	VRD2E24PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E25X	-	VRD2E25PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E26X	-	VRD2E26PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E27X	-	VRD2E27PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E28X	-	VRD2E28PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E29X	-	VRD2E29PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E2AX	-	VRD2E2APLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E2BX	-	VRD2E2BPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E2CX	-	VRD2E2CPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E2DX	-	VRD2E2DPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E2EX	-	VRD2E2EPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E2FX	-	VRD2E2FPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E2GX	-	VRD2E2GPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E2HX	-	VRD2E2HPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E2JX	-	VRD2E2JPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E2KX	-	VRD2E2KPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E30X	-	VRD2E30PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E31X	-	VRD2E31PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E32X	-	VRD2E32PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E33X	-	VRD2E33PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E34X	-	VRD2E34PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E35X	-	VRD2E35PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E36X	-	VRD2E36PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E37X	-	VRD2E37PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E38X	-	VRD2E38PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E39X	-	VRD2E39PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E3AX	-	VRD2E3APLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E3BX	-	VRD2E3BPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E3CX	-	VRD2E3CPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E3DX	-	VRD2E3DPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E3EX	-	VRD2E3EPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E3FX	-	VRD2E3FPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E3GX	-	VRD2E3GPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E3HX	-	VRD2E3HPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E3JX	-	VRD2E3JPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E3KX	-	VRD2E3KPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E40X	-	VRD2E40PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E41X	-	VRD2E41PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E42X	-	VRD2E42PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E43X	-	VRD2E43PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E44X	-	VRD2E44PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E45X	-	VRD2E45PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E46X	-	VRD2E46PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E47X	-	VRD2E47PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E48X	-	VRD2E48PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E49X	-	VRD2E49PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E4AX	-	VRD2E4APLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2E4BX	-	VRD2E4BPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E4CX	-	VRD2E4CPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E4DX	-	VRD2E4DPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E4EX	-	VRD2E4EPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E4FX	-	VRD2E4FPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E4GX	-	VRD2E4GPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E4HX	-	VRD2E4HPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E4JX	-	VRD2E4JPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E4KX	-	VRD2E4KPLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2E50X	-	VRD2E50PLX	LVR-IC	LDO, Dual out, Vo1=2.45V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F08X	-	VRD2F08NLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F09X	-	VRD2F09NLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F0JX	-	VRD2F0JNLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F0KX	-	VRD2F0KNLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F10X	-	VRD2F10NLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F11X	-	VRD2F11NLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F12X	-	VRD2F12NLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F13X	-	VRD2F13NLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F14X	-	VRD2F14NLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F15X	-	VRD2F15NLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F16X	-	VRD2F16NLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F17X	-	VRD2F17NLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F18X	-	VRD2F18NLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F19X	-	VRD2F19NLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F1AX	-	VRD2F1ANLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F1BX	-	VRD2F1BNLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F1CX	-	VRD2F1CNLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F1DX	-	VRD2F1DNLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F1EX	-	VRD2F1ENLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F1FX	-	VRD2F1FNLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F1GX	-	VRD2F1GNLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F1HX	-	VRD2F1HNLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F1JX	-	VRD2F1JNLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F1KX	-	VRD2F1KPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F20X	-	VRD2F20PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F21X	-	VRD2F21PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F22X	-	VRD2F22PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F23X	-	VRD2F23PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F24X	-	VRD2F24PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F25X	-	VRD2F25PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F26X	-	VRD2F26PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F27X	-	VRD2F27PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F28X	-	VRD2F28PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F29X	-	VRD2F29PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F2AX	-	VRD2F2APLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F2BX	-	VRD2F2BPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F2CX	-	VRD2F2CPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F2DX	-	VRD2F2DPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F2EX	-	VRD2F2EPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F2FX	-	VRD2F2FPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F2GX	-	VRD2F2GPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F2HX	-	VRD2F2HPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F2JX	-	VRD2F2JPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F2KX	-	VRD2F2KPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F30X	-	VRD2F30PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F31X	-	VRD2F31PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F32X	-	VRD2F32PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F33X	-	VRD2F33PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F34X	-	VRD2F34PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F35X	-	VRD2F35PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F36X	-	VRD2F36PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F37X	-	VRD2F37PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F38X	-	VRD2F38PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F39X	-	VRD2F39PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F3AX	-	VRD2F3APLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F3BX	-	VRD2F3BPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F3CX	-	VRD2F3CPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F3DX	-	VRD2F3DPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F3EX	-	VRD2F3EPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F3FX	-	VRD2F3FPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2F3GX	-	VRD2F3GPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F3HX	-	VRD2F3HPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F3JX	-	VRD2F3JPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F3KX	-	VRD2F3KPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F40X	-	VRD2F40PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F41X	-	VRD2F41PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F42X	-	VRD2F42PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F43X	-	VRD2F43PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F44X	-	VRD2F44PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F45X	-	VRD2F45PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F46X	-	VRD2F46PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F47X	-	VRD2F47PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F48X	-	VRD2F48PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F49X	-	VRD2F49PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F4AX	-	VRD2F4APLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F4BX	-	VRD2F4BPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F4CX	-	VRD2F4CPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F4DX	-	VRD2F4DPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F4EX	-	VRD2F4EPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F4FX	-	VRD2F4FPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F4GX	-	VRD2F4GPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F4HX	-	VRD2F4HPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F4JX	-	VRD2F4JPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F4KX	-	VRD2F4KPLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2F50X	-	VRD2F50PLX	LVR-IC	LDO, Dual out, Vo1=2.55V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G08X	-	VRD2G08NLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G09X	-	VRD2G09NLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G0JX	-	VRD2G0JNLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G0KX	-	VRD2G0KNLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G10X	-	VRD2G10NLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G11X	-	VRD2G11NLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G12X	-	VRD2G12NLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G13X	-	VRD2G13NLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G14X	-	VRD2G14NLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G15X	-	VRD2G15NLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G16X	-	VRD2G16NLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G17X	-	VRD2G17NLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G18X	-	VRD2G18NLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G19X	-	VRD2G19NLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G1AX	-	VRD2G1ANLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G1BX	-	VRD2G1BNLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G1CX	-	VRD2G1CNLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G1DX	-	VRD2G1DNLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G1EX	-	VRD2G1ENLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G1FX	-	VRD2G1FNLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G1GX	-	VRD2G1GNLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G1HX	-	VRD2G1HNLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G1JX	-	VRD2G1JNLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G1KX	-	VRD2G1KPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G20X	-	VRD2G20PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G21X	-	VRD2G21PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G22X	-	VRD2G22PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G23X	-	VRD2G23PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G24X	-	VRD2G24PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G25X	-	VRD2G25PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G26X	-	VRD2G26PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G27X	-	VRD2G27PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G28X	-	VRD2G28PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G29X	-	VRD2G29PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G2AX	-	VRD2G2APLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G2BX	-	VRD2G2BPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G2CX	-	VRD2G2CPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G2DX	-	VRD2G2DPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G2EX	-	VRD2G2EPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G2FX	-	VRD2G2FPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G2GX	-	VRD2G2GPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G2HX	-	VRD2G2HPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G2JX	-	VRD2G2JPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G2KX	-	VRD2G2KPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G30X	-	VRD2G30PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2G31X	-	VRD2G31PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G32X	-	VRD2G32PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G33X	-	VRD2G33PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G34X	-	VRD2G34PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G35X	-	VRD2G35PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G36X	-	VRD2G36PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G37X	-	VRD2G37PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G38X	-	VRD2G38PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G39X	-	VRD2G39PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G3AX	-	VRD2G3APLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G3BX	-	VRD2G3BPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G3CX	-	VRD2G3CPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G3DX	-	VRD2G3DPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G3EX	-	VRD2G3EPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G3FX	-	VRD2G3FPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G3GX	-	VRD2G3GPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G3HX	-	VRD2G3HPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G3JX	-	VRD2G3JPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G3KX	-	VRD2G3KPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G40X	-	VRD2G40PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G41X	-	VRD2G41PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G42X	-	VRD2G42PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G43X	-	VRD2G43PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G44X	-	VRD2G44PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G45X	-	VRD2G45PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G46X	-	VRD2G46PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G47X	-	VRD2G47PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G48X	-	VRD2G48PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G49X	-	VRD2G49PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G4AX	-	VRD2G4APLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G4BX	-	VRD2G4BPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G4CX	-	VRD2G4CPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G4DX	-	VRD2G4DPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G4EX	-	VRD2G4EPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G4FX	-	VRD2G4FPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G4GX	-	VRD2G4GPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G4HX	-	VRD2G4HPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G4JX	-	VRD2G4JPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G4KX	-	VRD2G4KPLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2G50X	-	VRD2G50PLX	LVR-IC	LDO, Dual out, Vo1=2.65V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H08X	-	VRD2H08NLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H09X	-	VRD2H09NLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H0JX	-	VRD2H0JNLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H0KX	-	VRD2H0KNLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H10X	-	VRD2H10NLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H11X	-	VRD2H11NLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H12X	-	VRD2H12NLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H13X	-	VRD2H13NLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H14X	-	VRD2H14NLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H15X	-	VRD2H15NLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H16X	-	VRD2H16NLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H17X	-	VRD2H17NLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H18X	-	VRD2H18NLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H19X	-	VRD2H19NLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H1AX	-	VRD2H1ANLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H1BX	-	VRD2H1BNLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H1CX	-	VRD2H1CNLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H1DX	-	VRD2H1DNLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H1EX	-	VRD2H1ENLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H1FX	-	VRD2H1FNLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H1GX	-	VRD2H1GNLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H1HX	-	VRD2H1HNLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H1JX	-	VRD2H1JNLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H1KX	-	VRD2H1KPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H20X	-	VRD2H20PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H21X	-	VRD2H21PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H22X	-	VRD2H22PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H23X	-	VRD2H23PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H24X	-	VRD2H24PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H25X	-	VRD2H25PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2H26X	-	VRD2H26PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H27X	-	VRD2H27PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H28X	-	VRD2H28PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H29X	-	VRD2H29PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H2AX	-	VRD2H2APLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H2BX	-	VRD2H2BPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H2CX	-	VRD2H2CPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H2DX	-	VRD2H2DPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H2EX	-	VRD2H2EPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H2FX	-	VRD2H2FPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H2GX	-	VRD2H2GPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H2HX	-	VRD2H2HPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H2JX	-	VRD2H2JPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H2KX	-	VRD2H2KPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H30X	-	VRD2H30PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H31X	-	VRD2H31PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H32X	-	VRD2H32PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H33X	-	VRD2H33PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H34X	-	VRD2H34PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H35X	-	VRD2H35PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H36X	-	VRD2H36PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H37X	-	VRD2H37PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H38X	-	VRD2H38PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H39X	-	VRD2H39PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H3AX	-	VRD2H3APLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H3BX	-	VRD2H3BPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H3CX	-	VRD2H3CPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H3DX	-	VRD2H3DPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H3EX	-	VRD2H3EPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H3FX	-	VRD2H3FPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H3GX	-	VRD2H3GPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H3HX	-	VRD2H3HPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H3JX	-	VRD2H3JPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H3KX	-	VRD2H3KPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H40X	-	VRD2H40PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H41X	-	VRD2H41PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H42X	-	VRD2H42PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H43X	-	VRD2H43PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H44X	-	VRD2H44PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H45X	-	VRD2H45PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H46X	-	VRD2H46PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H47X	-	VRD2H47PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H48X	-	VRD2H48PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H49X	-	VRD2H49PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H4AX	-	VRD2H4APLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H4BX	-	VRD2H4BPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H4CX	-	VRD2H4CPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H4DX	-	VRD2H4DPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H4EX	-	VRD2H4EPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H4FX	-	VRD2H4FPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H4GX	-	VRD2H4GPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H4HX	-	VRD2H4HPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H4JX	-	VRD2H4JPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H4KX	-	VRD2H4KPLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2H50X	-	VRD2H50PLX	LVR-IC	LDO, Dual out, Vo1=2.75V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J08X	-	VRD2J08NLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J09X	-	VRD2J09NLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J0JX	-	VRD2J0JNLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J0KX	-	VRD2J0KNLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J10X	-	VRD2J10NLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J11X	-	VRD2J11NLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J12X	-	VRD2J12NLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J13X	-	VRD2J13NLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J14X	-	VRD2J14NLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J15X	-	VRD2J15NLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J16X	-	VRD2J16NLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J17X	-	VRD2J17NLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J18X	-	VRD2J18NLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J19X	-	VRD2J19NLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J1AX	-	VRD2J1ANLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2J1BX	-	VRD2J1BNLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J1CX	-	VRD2J1CNLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J1DX	-	VRD2J1DNLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J1EX	-	VRD2J1ENLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J1FX	-	VRD2J1FNLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J1GX	-	VRD2J1GNLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J1HX	-	VRD2J1HNLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J1JX	-	VRD2J1JNLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J1KX	-	VRD2J1KPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J20X	-	VRD2J20PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J21X	-	VRD2J21PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J22X	-	VRD2J22PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J23X	-	VRD2J23PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J24X	-	VRD2J24PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J25X	-	VRD2J25PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J26X	-	VRD2J26PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J27X	-	VRD2J27PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J28X	-	VRD2J28PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J29X	-	VRD2J29PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J2AX	-	VRD2J2APLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J2BX	-	VRD2J2BPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J2CX	-	VRD2J2CPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J2DX	-	VRD2J2DPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J2EX	-	VRD2J2EPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J2FX	-	VRD2J2FPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J2GX	-	VRD2J2GPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J2HX	-	VRD2J2HPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J2JX	-	VRD2J2JPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J2KX	-	VRD2J2KPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J30X	-	VRD2J30PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J31X	-	VRD2J31PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J32X	-	VRD2J32PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J33X	-	VRD2J33PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J34X	-	VRD2J34PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J35X	-	VRD2J35PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J36X	-	VRD2J36PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J37X	-	VRD2J37PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J38X	-	VRD2J38PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J39X	-	VRD2J39PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J3AX	-	VRD2J3APLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J3BX	-	VRD2J3BPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J3CX	-	VRD2J3CPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J3DX	-	VRD2J3DPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J3EX	-	VRD2J3EPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J3FX	-	VRD2J3FPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J3GX	-	VRD2J3GPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J3HX	-	VRD2J3HPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J3JX	-	VRD2J3JPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J3KX	-	VRD2J3KPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J40X	-	VRD2J40PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J41X	-	VRD2J41PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J42X	-	VRD2J42PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J43X	-	VRD2J43PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J44X	-	VRD2J44PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J45X	-	VRD2J45PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J46X	-	VRD2J46PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J47X	-	VRD2J47PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J48X	-	VRD2J48PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J49X	-	VRD2J49PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J4AX	-	VRD2J4APLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J4BX	-	VRD2J4BPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J4CX	-	VRD2J4CPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J4DX	-	VRD2J4DPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J4EX	-	VRD2J4EPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J4FX	-	VRD2J4FPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J4GX	-	VRD2J4GPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J4HX	-	VRD2J4HPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J4JX	-	VRD2J4JPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J4KX	-	VRD2J4KPLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2J50X	-	VRD2J50PLX	LVR-IC	LDO, Dual out, Vo1=2.85V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2K08X	-	VRD2K08NLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K09X	-	VRD2K09NLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K0JX	-	VRD2K0JNLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K0KX	-	VRD2K0KNLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K10X	-	VRD2K10NLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K11X	-	VRD2K11NLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K12X	-	VRD2K12NLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K13X	-	VRD2K13NLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K14X	-	VRD2K14NLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K15X	-	VRD2K15NLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K16X	-	VRD2K16NLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K17X	-	VRD2K17NLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K18X	-	VRD2K18NLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K19X	-	VRD2K19NLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K1AX	-	VRD2K1ANLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K1BX	-	VRD2K1BNLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K1CX	-	VRD2K1CNLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K1DX	-	VRD2K1DNLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K1EX	-	VRD2K1ENLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K1FX	-	VRD2K1FNLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K1GX	-	VRD2K1GNLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K1HX	-	VRD2K1HNLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K1JX	-	VRD2K1JNLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K1KX	-	VRD2K1KPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K20X	-	VRD2K20PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K21X	-	VRD2K21PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K22X	-	VRD2K22PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K23X	-	VRD2K23PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K24X	-	VRD2K24PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K25X	-	VRD2K25PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K26X	-	VRD2K26PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K27X	-	VRD2K27PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K28X	-	VRD2K28PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K29X	-	VRD2K29PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K2AX	-	VRD2K2APLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K2BX	-	VRD2K2BPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K2CX	-	VRD2K2CPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K2DX	-	VRD2K2DPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K2EX	-	VRD2K2EPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K2FX	-	VRD2K2FPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K2GX	-	VRD2K2GPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K2HX	-	VRD2K2HPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K2JX	-	VRD2K2JPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K2KX	-	VRD2K2KPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K30X	-	VRD2K30PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K31X	-	VRD2K31PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K32X	-	VRD2K32PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K33X	-	VRD2K33PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K34X	-	VRD2K34PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K35X	-	VRD2K35PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K36X	-	VRD2K36PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K37X	-	VRD2K37PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K38X	-	VRD2K38PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K39X	-	VRD2K39PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K3AX	-	VRD2K3APLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K3BX	-	VRD2K3BPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K3CX	-	VRD2K3CPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K3DX	-	VRD2K3DPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K3EX	-	VRD2K3EPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K3FX	-	VRD2K3FPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K3GX	-	VRD2K3GPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K3HX	-	VRD2K3HPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K3JX	-	VRD2K3JPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K3KX	-	VRD2K3KPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K40X	-	VRD2K40PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K41X	-	VRD2K41PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K42X	-	VRD2K42PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K43X	-	VRD2K43PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K44X	-	VRD2K44PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K45X	-	VRD2K45PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D2K46X	-	VRD2K46PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K47X	-	VRD2K47PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K48X	-	VRD2K48PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K49X	-	VRD2K49PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K4AX	-	VRD2K4APLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K4BX	-	VRD2K4BPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K4CX	-	VRD2K4CPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K4DX	-	VRD2K4DPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K4EX	-	VRD2K4EPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K4FX	-	VRD2K4FPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K4GX	-	VRD2K4GPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K4HX	-	VRD2K4HPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K4JX	-	VRD2K4JPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K4KX	-	VRD2K4KPLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D2K50X	-	VRD2K50PLX	LVR-IC	LDO, Dual out, Vo1=2.95V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3	-	BZX884-C20	Z-diode	20V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
D3	-	R3118K391A	Vdet-IC	3.9V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
D3	-	RP109L211B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
D3	-	SN74LVC1G373YZP	CMOS-Log	D-type transparent latch with 3-state output	BGA-6	40	Log35	9v	Ti
D3	-	XC6221A3417R	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
D3	-	XC6223F13B9R-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
D3	-	XC6GC3302HR	Vdet-IC	3.3V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
D3	-	XC9245A11C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.1V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
D3008X	-	VRD3008NLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3009X	-	VRD3009NLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D300JX	-	VRD300JNLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D300KX	-	VRD300KNLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3010X	-	VRD3010NLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3011X	-	VRD3011NLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3012X	-	VRD3012NLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3013X	-	VRD3013NLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3014X	-	VRD3014NLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3015X	-	VRD3015NLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3016X	-	VRD3016NLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3017X	-	VRD3017NLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3018X	-	VRD3018NLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3019X	-	VRD3019NLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D301AX	-	VRD301ANLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D301BX	-	VRD301BNLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D301CX	-	VRD301CNLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D301DX	-	VRD301DNLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D301EX	-	VRD301ENLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D301FX	-	VRD301FNLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D301GX	-	VRD301GNLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D301HX	-	VRD301HNLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D301JX	-	VRD301JNLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D301KX	-	VRD301KPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3020X	-	VRD3020PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3021X	-	VRD3021PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3022X	-	VRD3022PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3023X	-	VRD3023PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3024X	-	VRD3024PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3025X	-	VRD3025PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3026X	-	VRD3026PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3027X	-	VRD3027PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3028X	-	VRD3028PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3029X	-	VRD3029PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D302AX	-	VRD302APLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D302BX	-	VRD302BPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D302CX	-	VRD302CPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D302DX	-	VRD302DPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D302EX	-	VRD302EPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D302FX	-	VRD302FPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D302GX	-	VRD302GPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D302HX	-	VRD302HPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D302JX	-	VRD302JPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D302KX	-	VRD302KPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3030X	-	VRD3030PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3031X	-	VRD3031PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3032X	-	VRD3032PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3033X	-	VRD3033PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3034X	-	VRD3034PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3035X	-	VRD3035PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3036X	-	VRD3036PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3037X	-	VRD3037PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3038X	-	VRD3038PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3039X	-	VRD3039PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D303AX	-	VRD303APLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D303BX	-	VRD303BPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D303CX	-	VRD303CPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D303DX	-	VRD303DPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D303EX	-	VRD303EPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D303FX	-	VRD303FPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D303GX	-	VRD303GPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D303HX	-	VRD303HPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D303JX	-	VRD303JPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D303KX	-	VRD303KPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3040X	-	VRD3040PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3041X	-	VRD3041PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3042X	-	VRD3042PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3043X	-	VRD3043PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3044X	-	VRD3044PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3045X	-	VRD3045PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3046X	-	VRD3046PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3047X	-	VRD3047PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3048X	-	VRD3048PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3049X	-	VRD3049PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D304AX	-	VRD304APLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D304BX	-	VRD304BPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D304CX	-	VRD304CPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D304DX	-	VRD304DPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D304EX	-	VRD304EPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D304FX	-	VRD304FPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D304GX	-	VRD304GPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D304HX	-	VRD304HPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D304JX	-	VRD304JPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D304KX	-	VRD304KPLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3050X	-	VRD3050PLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D30A	-	RP506K301A	DC-DC-IC	PWM/VFM step-down, 3.0V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D30B	-	RP506K301B	DC-DC-IC	PWM/VFM step-down, 3.0V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D30D	-	RP506K301D	DC-DC-IC	PWM/VFM step-down, 3.0V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D30E	-	RP506K301E	DC-DC-IC	PWM/VFM step-down, 3.0V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D3108X	-	VRD3108NLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3109X	-	VRD3109NLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D310JX	-	VRD310JNLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D310KX	-	VRD310KNLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3110X	-	VRD3110NLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3111X	-	VRD3111NLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3112X	-	VRD3112NLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3113X	-	VRD3113NLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3114X	-	VRD3114NLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3115X	-	VRD3115NLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3116X	-	VRD3116NLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3117X	-	VRD3117NLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3118X	-	VRD3118NLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3119X	-	VRD3119NLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D311AX	-	VRD311ANLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D311BX	-	VRD311BNLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D311CX	-	VRD311CNLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D311DX	-	VRD311DNLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D311EX	-	VRD311ENLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D311FX	-	VRD311FNLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D311GX	-	VRD311GNLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D311HX	-	VRD311HNLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D311JX	-	VRD311JNLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D311KX	-	VRD311KPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3120X	-	VRD3120PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3121X	-	VRD3121PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3122X	-	VRD3122PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3123X	-	VRD3123PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3124X	-	VRD3124PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3125X	-	VRD3125PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3126X	-	VRD3126PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3127X	-	VRD3127PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3128X	-	VRD3128PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3129X	-	VRD3129PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D312AX	-	VRD312APLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D312BX	-	VRD312BPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D312CX	-	VRD312CPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D312DX	-	VRD312DPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D312EX	-	VRD312EPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D312FX	-	VRD312FPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D312GX	-	VRD312GPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D312HX	-	VRD312HPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D312JX	-	VRD312JPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D312KX	-	VRD312KPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3130X	-	VRD3130PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3131X	-	VRD3131PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3132X	-	VRD3132PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3133X	-	VRD3133PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3134X	-	VRD3134PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3135X	-	VRD3135PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3136X	-	VRD3136PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3137X	-	VRD3137PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3138X	-	VRD3138PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3139X	-	VRD3139PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D313AX	-	VRD313APLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D313BX	-	VRD313BPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D313CX	-	VRD313CPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D313DX	-	VRD313DPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D313EX	-	VRD313EPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D313FX	-	VRD313FPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D313GX	-	VRD313GPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D313HX	-	VRD313HPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D313JX	-	VRD313JPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D313KX	-	VRD313KPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3140X	-	VRD3140PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3141X	-	VRD3141PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3142X	-	VRD3142PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3143X	-	VRD3143PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3144X	-	VRD3144PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3145X	-	VRD3145PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3146X	-	VRD3146PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3147X	-	VRD3147PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3148X	-	VRD3148PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3149X	-	VRD3149PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D314AX	-	VRD314APLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D314BX	-	VRD314BPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D314CX	-	VRD314CPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D314DX	-	VRD314DPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D314EX	-	VRD314EPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D314FX	-	VRD314FPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D314GX	-	VRD314GPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D314HX	-	VRD314HPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D314JX	-	VRD314JPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D314KX	-	VRD314KPLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3150X	-	VRD3150PLX	LVR-IC	LDO, Dual out, Vo1=3.1V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D31A	-	RP506K311A	DC-DC-IC	PWM/VFM step-down, 3.1V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D31B	-	RP506K311B	DC-DC-IC	PWM/VFM step-down, 3.1V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D31D	-	RP506K311D	DC-DC-IC	PWM/VFM step-down, 3.1V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D31E	-	RP506K311E	DC-DC-IC	PWM/VFM step-down, 3.1V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D3208X	-	VRD3208NLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3209X	-	VRD3209NLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D320JX	-	VRD320JNLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D320KX	-	VRD320KNLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3210X	-	VRD3210NLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3211X	-	VRD3211NLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3212X	-	VRD3212NLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3213X	-	VRD3213NLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3214X	-	VRD3214NLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3215X	-	VRD3215NLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3216X	-	VRD3216NLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3217X	-	VRD3217NLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3218X	-	VRD3218NLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3219X	-	VRD3219NLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D321AX	-	VRD321ANLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D321BX	-	VRD321BNLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D321CX	-	VRD321CNLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D321DX	-	VRD321DNLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D321EX	-	VRD321ENLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D321FX	-	VRD321FNLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D321GX	-	VRD321GNLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D321HX	-	VRD321HNLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D321JX	-	VRD321JNLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D321KX	-	VRD321KPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3220X	-	VRD3220PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3221X	-	VRD3221PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3222X	-	VRD3222PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3223X	-	VRD3223PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3224X	-	VRD3224PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3225X	-	VRD3225PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3226X	-	VRD3226PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3227X	-	VRD3227PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3228X	-	VRD3228PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3229X	-	VRD3229PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D322AX	-	VRD322APLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D322BX	-	VRD322BPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D322CX	-	VRD322CPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D322DX	-	VRD322DPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D322EX	-	VRD322EPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D322FX	-	VRD322FPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D322GX	-	VRD322GPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D322HX	-	VRD322HPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D322JX	-	VRD322JPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D322KX	-	VRD322KPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3230X	-	VRD3230PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3231X	-	VRD3231PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3232X	-	VRD3232PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3233X	-	VRD3233PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3234X	-	VRD3234PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3235X	-	VRD3235PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3236X	-	VRD3236PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3237X	-	VRD3237PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3238X	-	VRD3238PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3239X	-	VRD3239PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D323AX	-	VRD323APLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D323BX	-	VRD323BPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D323CX	-	VRD323CPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D323DX	-	VRD323DPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D323EX	-	VRD323EPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D323FX	-	VRD323FPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D323GX	-	VRD323GPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D323HX	-	VRD323HPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D323JX	-	VRD323JPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D323KX	-	VRD323KPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3240X	-	VRD3240PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3241X	-	VRD3241PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3242X	-	VRD3242PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3243X	-	VRD3243PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3244X	-	VRD3244PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3245X	-	VRD3245PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3246X	-	VRD3246PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3247X	-	VRD3247PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3248X	-	VRD3248PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3249X	-	VRD3249PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D324AX	-	VRD324APLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D324BX	-	VRD324BPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D324CX	-	VRD324CPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D324DX	-	VRD324DPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D324EX	-	VRD324EPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D324FX	-	VRD324FPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D324GX	-	VRD324GPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D324HX	-	VRD324HPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D324JX	-	VRD324JPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D324KX	-	VRD324KPLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3250X	-	VRD3250PLX	LVR-IC	LDO, Dual out, Vo1=3.2V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D32A	-	RP506K321A	DC-DC-IC	PWM/VFM step-down, 3.2V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D32B	-	RP506K321B	DC-DC-IC	PWM/VFM step-down, 3.2V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D32D	-	RP506K321D	DC-DC-IC	PWM/VFM step-down, 3.2V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D32E	-	RP506K321E	DC-DC-IC	PWM/VFM step-down, 3.2V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D33	-	XC61GC3302HR	Vdet-IC	3.3V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
D3308X	-	VRD3308NLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3309X	-	VRD3309NLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D330JX	-	VRD330JNLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D330KX	-	VRD330KNLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3310X	-	VRD3310NLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3311X	-	VRD3311NLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3312X	-	VRD3312NLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3313X	-	VRD3313NLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3314X	-	VRD3314NLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3315X	-	VRD3315NLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3316X	-	VRD3316NLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3317X	-	VRD3317NLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3318X	-	VRD3318NLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3319X	-	VRD3319NLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D331AX	-	VRD331ANLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D331BX	-	VRD331BNLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D331CX	-	VRD331CNLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D331DX	-	VRD331DNLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D331EX	-	VRD331ENLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D331FX	-	VRD331FNLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D331GX	-	VRD331GNLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D331HX	-	VRD331HNLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D331JX	-	VRD331JNLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D331KX	-	VRD331KPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3320X	-	VRD3320PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3321X	-	VRD3321PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3322X	-	VRD3322PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3323X	-	VRD3323PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3324X	-	VRD3324PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3325X	-	VRD3325PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3326X	-	VRD3326PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3327X	-	VRD3327PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3328X	-	VRD3328PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3329X	-	VRD3329PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D332AX	-	VRD332APLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D332BX	-	VRD332BPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D332CX	-	VRD332CPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D332DX	-	VRD332DPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D332EX	-	VRD332EPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D332FX	-	VRD332FPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D332GX	-	VRD332GPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D332HX	-	VRD332HPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D332JX	-	VRD332JPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D332KX	-	VRD332KPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3330X	-	VRD3330PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3331X	-	VRD3331PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3332X	-	VRD3332PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3333X	-	VRD3333PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3334X	-	VRD3334PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3335X	-	VRD3335PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3336X	-	VRD3336PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3337X	-	VRD3337PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3338X	-	VRD3338PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3339X	-	VRD3339PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D333AX	-	VRD333APLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D333BX	-	VRD333BPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D333CX	-	VRD333CPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D333DX	-	VRD333DPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D333EX	-	VRD333EPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D333FX	-	VRD333FPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D333GX	-	VRD333GPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D333HX	-	VRD333HPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D333JX	-	VRD333JPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D333KX	-	VRD333KPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3340X	-	VRD3340PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3341X	-	VRD3341PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3342X	-	VRD3342PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3343X	-	VRD3343PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3344X	-	VRD3344PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3345X	-	VRD3345PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3346X	-	VRD3346PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3347X	-	VRD3347PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3348X	-	VRD3348PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3349X	-	VRD3349PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D334AX	-	VRD334APLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D334BX	-	VRD334BPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D334CX	-	VRD334CPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D334DX	-	VRD334DPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D334EX	-	VRD334EPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D334FX	-	VRD334FPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D334GX	-	VRD334GPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D334HX	-	VRD334HPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D334JX	-	VRD334JPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D334KX	-	VRD334KPLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3350X	-	VRD3350PLX	LVR-IC	LDO, Dual out, Vo1=3.3V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D33A	-	RP506K331A	DC-DC-IC	PWM/VFM step-down, 3.3V±1.5%, 2A, 2.25MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D33B	-	RP506K331B	DC-DC-IC	PWM/VFM step-down, 3.3V±1.5%, 2A, 2.25MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D33D	-	RP506K331D	DC-DC-IC	PWM/VFM step-down, 3.3V±1.5%, 2A, 1.2MHz, +CE, MODE	DFN2527-10	37a5	-	9b	Ric
D33E	-	RP506K331E	DC-DC-IC	PWM/VFM step-down, 3.3V±1.5%, 2A, 1.2MHz, +CE, MODE, CL	DFN2527-10	37a5	-	9b	Ric
D3408X	-	VRD3408NLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3409X	-	VRD3409NLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D340JX	-	VRD340JNLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D340KX	-	VRD340KNLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3410X	-	VRD3410NLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3411X	-	VRD3411NLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3412X	-	VRD3412NLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3413X	-	VRD3413NLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3414X	-	VRD3414NLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3415X	-	VRD3415NLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3416X	-	VRD3416NLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3417X	-	VRD3417NLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3418X	-	VRD3418NLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3419X	-	VRD3419NLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D341AX	-	VRD341ANLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D341BX	-	VRD341BNLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D341CX	-	VRD341CNLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D341DX	-	VRD341DNLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D341EX	-	VRD341ENLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D341FX	-	VRD341FNLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D341GX	-	VRD341GNLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D341HX	-	VRD341HNLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D341JX	-	VRD341JNLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D341KX	-	VRD341KPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3420X	-	VRD3420PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3421X	-	VRD3421PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3422X	-	VRD3422PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3423X	-	VRD3423PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3424X	-	VRD3424PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3425X	-	VRD3425PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3426X	-	VRD3426PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3427X	-	VRD3427PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3428X	-	VRD3428PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3429X	-	VRD3429PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D342AX	-	VRD342APLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D342BX	-	VRD342BPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D342CX	-	VRD342CPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D342DX	-	VRD342DPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D342EX	-	VRD342EPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D342FX	-	VRD342FPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D342GX	-	VRD342GPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D342HX	-	VRD342HPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D342JX	-	VRD342JPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D342KX	-	VRD342KPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3430X	-	VRD3430PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3431X	-	VRD3431PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3432X	-	VRD3432PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3433X	-	VRD3433PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3434X	-	VRD3434PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3435X	-	VRD3435PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3436X	-	VRD3436PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3437X	-	VRD3437PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3438X	-	VRD3438PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3439X	-	VRD3439PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D343AX	-	VRD343APLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D343BX	-	VRD343BPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D343CX	-	VRD343CPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D343DX	-	VRD343DPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D343EX	-	VRD343EPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D343FX	-	VRD343FPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D343GX	-	VRD343GPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D343HX	-	VRD343HPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D343JX	-	VRD343JPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D343KX	-	VRD343KPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3440X	-	VRD3440PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3441X	-	VRD3441PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3442X	-	VRD3442PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3443X	-	VRD3443PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3444X	-	VRD3444PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3445X	-	VRD3445PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3446X	-	VRD3446PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3447X	-	VRD3447PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3448X	-	VRD3448PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3449X	-	VRD3449PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D344AX	-	VRD344APLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D344BX	-	VRD344BPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D344CX	-	VRD344CPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D344DX	-	VRD344DPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D344EX	-	VRD344EPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D344FX	-	VRD344FPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D344GX	-	VRD344GPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D344HX	-	VRD344HPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D344JX	-	VRD344JPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D344KX	-	VRD344KPLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3450X	-	VRD3450PLX	LVR-IC	LDO, Dual out, Vo1=3.4V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3508X	-	VRD3508NLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3509X	-	VRD3509NLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D350JX	-	VRD350JNLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D350KX	-	VRD350KNLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3510X	-	VRD3510NLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3511X	-	VRD3511NLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3512X	-	VRD3512NLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3513X	-	VRD3513NLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3514X	-	VRD3514NLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3515X	-	VRD3515NLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3516X	-	VRD3516NLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3517X	-	VRD3517NLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3518X	-	VRD3518NLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3519X	-	VRD3519NLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D351AX	-	VRD351ANLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D351BX	-	VRD351BNLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D351CX	-	VRD351CNLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D351DX	-	VRD351DNLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D351EX	-	VRD351ENLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D351FX	-	VRD351FNLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D351GX	-	VRD351GNLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D351HX	-	VRD351HNLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D351JX	-	VRD351JNLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D351KX	-	VRD351KPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3520X	-	VRD3520PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3521X	-	VRD3521PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3522X	-	VRD3522PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3523X	-	VRD3523PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3524X	-	VRD3524PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3525X	-	VRD3525PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3526X	-	VRD3526PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3527X	-	VRD3527PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3528X	-	VRD3528PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3529X	-	VRD3529PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D352AX	-	VRD352APLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D352BX	-	VRD352BPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D352CX	-	VRD352CPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D352DX	-	VRD352DPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D352EX	-	VRD352EPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D352FX	-	VRD352FPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D352GX	-	VRD352GPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D352HX	-	VRD352HPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D352JX	-	VRD352JPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D352KX	-	VRD352KPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3530X	-	VRD3530PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3531X	-	VRD3531PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3532X	-	VRD3532PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3533X	-	VRD3533PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3534X	-	VRD3534PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3535X	-	VRD3535PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3536X	-	VRD3536PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3537X	-	VRD3537PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3538X	-	VRD3538PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3539X	-	VRD3539PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D353AX	-	VRD353APLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D353BX	-	VRD353BPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D353CX	-	VRD353CPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D353DX	-	VRD353DPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D353EX	-	VRD353EPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D353FX	-	VRD353FPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D353GX	-	VRD353GPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D353HX	-	VRD353HPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D353JX	-	VRD353JPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D353KX	-	VRD353KPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3540X	-	VRD3540PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3541X	-	VRD3541PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3542X	-	VRD3542PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3543X	-	VRD3543PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3544X	-	VRD3544PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3545X	-	VRD3545PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3546X	-	VRD3546PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3547X	-	VRD3547PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3548X	-	VRD3548PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3549X	-	VRD3549PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D354AX	-	VRD354APLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D354BX	-	VRD354BPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D354CX	-	VRD354CPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D354DX	-	VRD354DPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D354EX	-	VRD354EPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D354FX	-	VRD354FPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D354GX	-	VRD354GPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D354HX	-	VRD354HPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D354JX	-	VRD354JPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D354KX	-	VRD354KPLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3550X	-	VRD3550PLX	LVR-IC	LDO, Dual out, Vo1=3.5V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3608X	-	VRD3608NLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3609X	-	VRD3609NLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D360JX	-	VRD360JNLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D360KX	-	VRD360KNLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3610X	-	VRD3610NLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3611X	-	VRD3611NLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3612X	-	VRD3612NLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3613X	-	VRD3613NLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3614X	-	VRD3614NLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3615X	-	VRD3615NLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3616X	-	VRD3616NLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3617X	-	VRD3617NLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3618X	-	VRD3618NLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3619X	-	VRD3619NLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D361AX	-	VRD361ANLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D361BX	-	VRD361BNLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D361CX	-	VRD361CNLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D361DX	-	VRD361DNLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D361EX	-	VRD361ENLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D361FX	-	VRD361FNLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D361GX	-	VRD361GNLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D361HX	-	VRD361HNLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D361JX	-	VRD361JNLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D361KX	-	VRD361KPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3620X	-	VRD3620PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3621X	-	VRD3621PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3622X	-	VRD3622PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3623X	-	VRD3623PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3624X	-	VRD3624PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3625X	-	VRD3625PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3626X	-	VRD3626PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3627X	-	VRD3627PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3628X	-	VRD3628PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3629X	-	VRD3629PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D362AX	-	VRD362APLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D362BX	-	VRD362BPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D362CX	-	VRD362CPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D362DX	-	VRD362DPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D362EX	-	VRD362EPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D362FX	-	VRD362FPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D362GX	-	VRD362GPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D362HX	-	VRD362HPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D362JX	-	VRD362JPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D362KX	-	VRD362KPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3630X	-	VRD3630PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3631X	-	VRD3631PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3632X	-	VRD3632PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3633X	-	VRD3633PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3634X	-	VRD3634PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3635X	-	VRD3635PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3636X	-	VRD3636PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3637X	-	VRD3637PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3638X	-	VRD3638PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3639X	-	VRD3639PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D363AX	-	VRD363APLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D363BX	-	VRD363BPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D363CX	-	VRD363CPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D363DX	-	VRD363DPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D363EX	-	VRD363EPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D363FX	-	VRD363FPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D363GX	-	VRD363GPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D363HX	-	VRD363HPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D363JX	-	VRD363JPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D363KX	-	VRD363KPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3640X	-	VRD3640PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3641X	-	VRD3641PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3642X	-	VRD3642PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3643X	-	VRD3643PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3644X	-	VRD3644PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3645X	-	VRD3645PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3646X	-	VRD3646PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3647X	-	VRD3647PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3648X	-	VRD3648PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3649X	-	VRD3649PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D364AX	-	VRD364APLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D364BX	-	VRD364BPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D364CX	-	VRD364CPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D364DX	-	VRD364DPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D364EX	-	VRD364EPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D364FX	-	VRD364FPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D364GX	-	VRD364GPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D364HX	-	VRD364HPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D364JX	-	VRD364JPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D364KX	-	VRD364KPLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3650X	-	VRD3650PLX	LVR-IC	LDO, Dual out, Vo1=3.6V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3708X	-	VRD3708NLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3709X	-	VRD3709NLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D370JX	-	VRD370JNLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D370KX	-	VRD370KNLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3710X	-	VRD3710NLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3711X	-	VRD3711NLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3712X	-	VRD3712NLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3713X	-	VRD3713NLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3714X	-	VRD3714NLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3715X	-	VRD3715NLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3716X	-	VRD3716NLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3717X	-	VRD3717NLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3718X	-	VRD3718NLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3719X	-	VRD3719NLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D371AX	-	VRD371ANLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D371BX	-	VRD371BNLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D371CX	-	VRD371CNLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D371DX	-	VRD371DNLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D371EX	-	VRD371ENLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D371FX	-	VRD371FNLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D371GX	-	VRD371GNLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D371HX	-	VRD371HNLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D371JX	-	VRD371JNLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D371KX	-	VRD371KPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3720X	-	VRD3720PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3721X	-	VRD3721PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3722X	-	VRD3722PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3723X	-	VRD3723PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3724X	-	VRD3724PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3725X	-	VRD3725PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3726X	-	VRD3726PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3727X	-	VRD3727PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3728X	-	VRD3728PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3729X	-	VRD3729PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D372AX	-	VRD372APLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D372BX	-	VRD372BPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D372CX	-	VRD372CPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D372DX	-	VRD372DPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D372EX	-	VRD372EPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D372FX	-	VRD372FPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D372GX	-	VRD372GPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D372HX	-	VRD372HPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D372JX	-	VRD372JPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D372KX	-	VRD372KPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3730X	-	VRD3730PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3731X	-	VRD3731PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3732X	-	VRD3732PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3733X	-	VRD3733PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3734X	-	VRD3734PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3735X	-	VRD3735PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3736X	-	VRD3736PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3737X	-	VRD3737PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3738X	-	VRD3738PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3739X	-	VRD3739PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D373AX	-	VRD373APLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D373BX	-	VRD373BPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D373CX	-	VRD373CPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D373DX	-	VRD373DPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D373EX	-	VRD373EPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D373FX	-	VRD373FPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D373GX	-	VRD373GPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D373HX	-	VRD373HPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D373JX	-	VRD373JPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D373KX	-	VRD373KPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3740X	-	VRD3740PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3741X	-	VRD3741PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3742X	-	VRD3742PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3743X	-	VRD3743PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3744X	-	VRD3744PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3745X	-	VRD3745PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3746X	-	VRD3746PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3747X	-	VRD3747PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3748X	-	VRD3748PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3749X	-	VRD3749PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D374AX	-	VRD374APLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D374BX	-	VRD374BPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D374CX	-	VRD374CPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D374DX	-	VRD374DPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D374EX	-	VRD374EPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D374FX	-	VRD374FPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D374GX	-	VRD374GPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D374HX	-	VRD374HPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D374JX	-	VRD374JPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D374KX	-	VRD374KPLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3750X	-	VRD3750PLX	LVR-IC	LDO, Dual out, Vo1=3.7V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3808X	-	VRD3808NLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3809X	-	VRD3809NLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D380JX	-	VRD380JNLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D380KX	-	VRD380KNLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3810X	-	VRD3810NLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3811X	-	VRD3811NLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3812X	-	VRD3812NLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3813X	-	VRD3813NLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3814X	-	VRD3814NLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3815X	-	VRD3815NLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3816X	-	VRD3816NLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3817X	-	VRD3817NLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3818X	-	VRD3818NLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3819X	-	VRD3819NLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D381AX	-	VRD381ANLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D381BX	-	VRD381BNLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D381CX	-	VRD381CNLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D381DX	-	VRD381DNLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D381EX	-	VRD381ENLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D381FX	-	VRD381FNLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D381GX	-	VRD381GNLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D381HX	-	VRD381HNLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D381JX	-	VRD381JNLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D381KX	-	VRD381KPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3820X	-	VRD3820PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3821X	-	VRD3821PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3822X	-	VRD3822PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3823X	-	VRD3823PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3824X	-	VRD3824PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3825X	-	VRD3825PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3826X	-	VRD3826PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3827X	-	VRD3827PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3828X	-	VRD3828PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3829X	-	VRD3829PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D382AX	-	VRD382APLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D382BX	-	VRD382BPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D382CX	-	VRD382CPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D382DX	-	VRD382DPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D382EX	-	VRD382EPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D382FX	-	VRD382FPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D382GX	-	VRD382GPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D382HX	-	VRD382HPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D382JX	-	VRD382JPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D382KX	-	VRD382KPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3830X	-	VRD3830PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3831X	-	VRD3831PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3832X	-	VRD3832PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3833X	-	VRD3833PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3834X	-	VRD3834PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3835X	-	VRD3835PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3836X	-	VRD3836PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3837X	-	VRD3837PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3838X	-	VRD3838PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3839X	-	VRD3839PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D383AX	-	VRD383APLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D383BX	-	VRD383BPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D383CX	-	VRD383CPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D383DX	-	VRD383DPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D383EX	-	VRD383EPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D383FX	-	VRD383FPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D383GX	-	VRD383GPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D383HX	-	VRD383HPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D383JX	-	VRD383JPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D383KX	-	VRD383KPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3840X	-	VRD3840PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3841X	-	VRD3841PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3842X	-	VRD3842PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3843X	-	VRD3843PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3844X	-	VRD3844PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3845X	-	VRD3845PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3846X	-	VRD3846PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3847X	-	VRD3847PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3848X	-	VRD3848PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3849X	-	VRD3849PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D384AX	-	VRD384APLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D384BX	-	VRD384BPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D384CX	-	VRD384CPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D384DX	-	VRD384DPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D384EX	-	VRD384EPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D384FX	-	VRD384FPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D384GX	-	VRD384GPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D384HX	-	VRD384HPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D384JX	-	VRD384JPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D384KX	-	VRD384KPLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3850X	-	VRD3850PLX	LVR-IC	LDO, Dual out, Vo1=3.8V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3908X	-	VRD3908NLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3909X	-	VRD3909NLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D390JX	-	VRD390JNLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D390KX	-	VRD390KNLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3910X	-	VRD3910NLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3911X	-	VRD3911NLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3912X	-	VRD3912NLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3913X	-	VRD3913NLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3914X	-	VRD3914NLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3915X	-	VRD3915NLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3916X	-	VRD3916NLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3917X	-	VRD3917NLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3918X	-	VRD3918NLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3919X	-	VRD3919NLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D391AX	-	VRD391ANLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D391BX	-	VRD391BNLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D391CX	-	VRD391CNLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D391DX	-	VRD391DNLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D391EX	-	VRD391ENLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D391FX	-	VRD391FNLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D391GX	-	VRD391GNLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D391HX	-	VRD391HNLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D391JX	-	VRD391JNLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D391KX	-	VRD391KPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3920X	-	VRD3920PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3921X	-	VRD3921PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3922X	-	VRD3922PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3923X	-	VRD3923PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3924X	-	VRD3924PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3925X	-	VRD3925PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3926X	-	VRD3926PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3927X	-	VRD3927PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3928X	-	VRD3928PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3929X	-	VRD3929PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D392AX	-	VRD392APLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D392BX	-	VRD392BPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D392CX	-	VRD392CPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D392DX	-	VRD392DPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D392EX	-	VRD392EPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D392FX	-	VRD392FPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D392GX	-	VRD392GPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D392HX	-	VRD392HPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D392JX	-	VRD392JPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D392KX	-	VRD392KPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3930X	-	VRD3930PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3931X	-	VRD3931PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3932X	-	VRD3932PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3933X	-	VRD3933PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3934X	-	VRD3934PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3935X	-	VRD3935PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3936X	-	VRD3936PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3937X	-	VRD3937PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3938X	-	VRD3938PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3939X	-	VRD3939PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D393AX	-	VRD393APLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D393BX	-	VRD393BPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D393CX	-	VRD393CPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D393DX	-	VRD393DPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D393EX	-	VRD393EPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D393FX	-	VRD393FPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D393GX	-	VRD393GPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D393HX	-	VRD393HPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D393JX	-	VRD393JPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D393KX	-	VRD393KPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3940X	-	VRD3940PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3941X	-	VRD3941PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3942X	-	VRD3942PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3943X	-	VRD3943PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3944X	-	VRD3944PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3945X	-	VRD3945PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3946X	-	VRD3946PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3947X	-	VRD3947PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3948X	-	VRD3948PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3949X	-	VRD3949PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D394AX	-	VRD394APLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D394BX	-	VRD394BPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D394CX	-	VRD394CPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D394DX	-	VRD394DPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D394EX	-	VRD394EPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D394FX	-	VRD394FPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D394GX	-	VRD394GPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D394HX	-	VRD394HPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D394JX	-	VRD394JPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D394KX	-	VRD394KPLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3950X	-	VRD3950PLX	LVR-IC	LDO, Dual out, Vo1=3.9V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A	-	XC6108C33AGR	Vdet-IC	3.3V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D3A08X	-	VRD3A08NLX	LVR-IC	LDO, Dual out, Vo1=3.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A09X	-	VRD3A09NLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A0JX	-	VRD3A0JNLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A0KX	-	VRD3A0KNLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A10X	-	VRD3A10NLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A11X	-	VRD3A11NLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A12X	-	VRD3A12NLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A13X	-	VRD3A13NLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A14X	-	VRD3A14NLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A15X	-	VRD3A15NLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A16X	-	VRD3A16NLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A17X	-	VRD3A17NLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A18X	-	VRD3A18NLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A19X	-	VRD3A19NLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A1AX	-	VRD3A1ANLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A1BX	-	VRD3A1BNLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A1CX	-	VRD3A1CNLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A1DX	-	VRD3A1DNLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A1EX	-	VRD3A1ENLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3A1FX	-	VRD3A1FNLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A1GX	-	VRD3A1GNLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A1HX	-	VRD3A1HNLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A1JX	-	VRD3A1JNLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A1KX	-	VRD3A1KPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A20X	-	VRD3A20PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A21X	-	VRD3A21PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A22X	-	VRD3A22PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A23X	-	VRD3A23PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A24X	-	VRD3A24PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A25X	-	VRD3A25PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A26X	-	VRD3A26PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A27X	-	VRD3A27PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A28X	-	VRD3A28PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A29X	-	VRD3A29PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A2AX	-	VRD3A2APLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A2BX	-	VRD3A2BPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A2CX	-	VRD3A2CPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A2DX	-	VRD3A2DPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A2EX	-	VRD3A2EPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A2FX	-	VRD3A2FPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A2GX	-	VRD3A2GPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A2HX	-	VRD3A2HPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A2JX	-	VRD3A2JPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A2KX	-	VRD3A2KPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A30X	-	VRD3A30PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A31X	-	VRD3A31PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A32X	-	VRD3A32PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A33X	-	VRD3A33PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A34X	-	VRD3A34PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A35X	-	VRD3A35PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A36X	-	VRD3A36PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A37X	-	VRD3A37PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A38X	-	VRD3A38PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A39X	-	VRD3A39PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A3AX	-	VRD3A3APLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A3BX	-	VRD3A3BPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A3CX	-	VRD3A3CPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A3DX	-	VRD3A3DPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A3EX	-	VRD3A3EPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A3FX	-	VRD3A3FPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A3GX	-	VRD3A3GPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A3HX	-	VRD3A3HPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A3JX	-	VRD3A3JPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A3KX	-	VRD3A3KPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A40X	-	VRD3A40PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A41X	-	VRD3A41PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A42X	-	VRD3A42PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A43X	-	VRD3A43PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A44X	-	VRD3A44PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A45X	-	VRD3A45PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A46X	-	VRD3A46PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A47X	-	VRD3A47PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A48X	-	VRD3A48PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A49X	-	VRD3A49PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A4AX	-	VRD3A4APLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A4BX	-	VRD3A4BPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A4CX	-	VRD3A4CPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A4DX	-	VRD3A4DPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A4EX	-	VRD3A4EPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A4FX	-	VRD3A4FPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A4GX	-	VRD3A4GPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A4HX	-	VRD3A4HPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A4JX	-	VRD3A4JPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A4KX	-	VRD3A4KPLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3A50X	-	VRD3A50PLX	LVR-IC	LDO, Dual out, Vo1=3.05V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B	-	XC6108C33BGR	Vdet-IC	3.3V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D3B08X	-	VRD3B08NLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B09X	-	VRD3B09NLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B0JX	-	VRD3B0JNLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3B0KX	-	VRD3B0KNLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B10X	-	VRD3B10NLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B11X	-	VRD3B11NLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B12X	-	VRD3B12NLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B13X	-	VRD3B13NLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B14X	-	VRD3B14NLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B15X	-	VRD3B15NLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B16X	-	VRD3B16NLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B17X	-	VRD3B17NLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B18X	-	VRD3B18NLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B19X	-	VRD3B19NLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B1AX	-	VRD3B1ANLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B1BX	-	VRD3B1BNLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B1CX	-	VRD3B1CNLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B1DX	-	VRD3B1DNLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B1EX	-	VRD3B1ENLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B1FX	-	VRD3B1FNLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B1GX	-	VRD3B1GNLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B1HX	-	VRD3B1HNLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B1JX	-	VRD3B1JNLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B1KX	-	VRD3B1KPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B20X	-	VRD3B20PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B21X	-	VRD3B21PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B22X	-	VRD3B22PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B23X	-	VRD3B23PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B24X	-	VRD3B24PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B25X	-	VRD3B25PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B26X	-	VRD3B26PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B27X	-	VRD3B27PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B28X	-	VRD3B28PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B29X	-	VRD3B29PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B2AX	-	VRD3B2APLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B2BX	-	VRD3B2BPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B2CX	-	VRD3B2CPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B2DX	-	VRD3B2DPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B2EX	-	VRD3B2EPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B2FX	-	VRD3B2FPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B2GX	-	VRD3B2GPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B2HX	-	VRD3B2HPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B2JX	-	VRD3B2JPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B2KX	-	VRD3B2KPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B30X	-	VRD3B30PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B31X	-	VRD3B31PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B32X	-	VRD3B32PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B33X	-	VRD3B33PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B34X	-	VRD3B34PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B35X	-	VRD3B35PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B36X	-	VRD3B36PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B37X	-	VRD3B37PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B38X	-	VRD3B38PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B39X	-	VRD3B39PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B3AX	-	VRD3B3APLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B3BX	-	VRD3B3BPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B3CX	-	VRD3B3CPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B3DX	-	VRD3B3DPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B3EX	-	VRD3B3EPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B3FX	-	VRD3B3FPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B3GX	-	VRD3B3GPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B3HX	-	VRD3B3HPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B3JX	-	VRD3B3JPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B3KX	-	VRD3B3KPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B40X	-	VRD3B40PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B41X	-	VRD3B41PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B42X	-	VRD3B42PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B43X	-	VRD3B43PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B44X	-	VRD3B44PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B45X	-	VRD3B45PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B46X	-	VRD3B46PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B47X	-	VRD3B47PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B48X	-	VRD3B48PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3B49X	-	VRD3B49PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B4AX	-	VRD3B4APLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B4BX	-	VRD3B4BPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B4CX	-	VRD3B4CPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B4DX	-	VRD3B4DPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B4EX	-	VRD3B4EPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B4FX	-	VRD3B4FPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B4GX	-	VRD3B4GPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B4HX	-	VRD3B4HPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B4JX	-	VRD3B4JPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B4KX	-	VRD3B4KPLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3B50X	-	VRD3B50PLX	LVR-IC	LDO, Dual out, Vo1=3.15V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C	-	XC6108C33CGR	Vdet-IC	3.3V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D3C08X	-	VRD3C08NLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C09X	-	VRD3C09NLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C0JX	-	VRD3C0JNLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C0KX	-	VRD3C0KNLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C10X	-	VRD3C10NLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C11X	-	VRD3C11NLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C12X	-	VRD3C12NLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C13X	-	VRD3C13NLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C14X	-	VRD3C14NLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C15X	-	VRD3C15NLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C16X	-	VRD3C16NLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C17X	-	VRD3C17NLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C18X	-	VRD3C18NLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C19X	-	VRD3C19NLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C1AX	-	VRD3C1ANLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C1BX	-	VRD3C1BNLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C1CX	-	VRD3C1CNLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C1DX	-	VRD3C1DNLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C1EX	-	VRD3C1ENLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C1FX	-	VRD3C1FNLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C1GX	-	VRD3C1GNLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C1HX	-	VRD3C1HNLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C1JX	-	VRD3C1JNLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C1KX	-	VRD3C1KPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C20X	-	VRD3C20PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C21X	-	VRD3C21PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C22X	-	VRD3C22PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C23X	-	VRD3C23PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C24X	-	VRD3C24PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C25X	-	VRD3C25PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C26X	-	VRD3C26PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C27X	-	VRD3C27PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C28X	-	VRD3C28PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C29X	-	VRD3C29PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C2AX	-	VRD3C2APLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C2BX	-	VRD3C2BPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C2CX	-	VRD3C2CPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C2DX	-	VRD3C2DPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C2EX	-	VRD3C2EPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C2FX	-	VRD3C2FPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C2GX	-	VRD3C2GPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C2HX	-	VRD3C2HPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C2JX	-	VRD3C2JPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C2KX	-	VRD3C2KPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C30X	-	VRD3C30PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C31X	-	VRD3C31PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C32X	-	VRD3C32PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C33X	-	VRD3C33PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C34X	-	VRD3C34PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C35X	-	VRD3C35PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C36X	-	VRD3C36PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C37X	-	VRD3C37PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C38X	-	VRD3C38PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C39X	-	VRD3C39PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C3AX	-	VRD3C3APLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C3BX	-	VRD3C3BPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C3CX	-	VRD3C3CPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3C3DX	-	VRD3C3DPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C3EX	-	VRD3C3EPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C3FX	-	VRD3C3FPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C3GX	-	VRD3C3GPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C3HX	-	VRD3C3HPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C3JX	-	VRD3C3JPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C3KX	-	VRD3C3KPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C40X	-	VRD3C40PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C41X	-	VRD3C41PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C42X	-	VRD3C42PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C43X	-	VRD3C43PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C44X	-	VRD3C44PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C45X	-	VRD3C45PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C46X	-	VRD3C46PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C47X	-	VRD3C47PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C48X	-	VRD3C48PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C49X	-	VRD3C49PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C4AX	-	VRD3C4APLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C4BX	-	VRD3C4BPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C4CX	-	VRD3C4CPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C4DX	-	VRD3C4DPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C4EX	-	VRD3C4EPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C4FX	-	VRD3C4FPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C4GX	-	VRD3C4GPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C4HX	-	VRD3C4HPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C4JX	-	VRD3C4JPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C4KX	-	VRD3C4KPLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3C50X	-	VRD3C50PLX	LVR-IC	LDO, Dual out, Vo1=3.25V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D	-	XC6108C33DGR	Vdet-IC	3.3V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D3D08X	-	VRD3D08NLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D09X	-	VRD3D09NLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D0JX	-	VRD3D0JNLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D0KX	-	VRD3D0KNLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D10X	-	VRD3D10NLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D11X	-	VRD3D11NLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D12X	-	VRD3D12NLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D13X	-	VRD3D13NLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D14X	-	VRD3D14NLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D16X	-	VRD3D16NLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D17X	-	VRD3D17NLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D18X	-	VRD3D18NLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D19X	-	VRD3D19NLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D1AX	-	VRD3D1ANLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D1BX	-	VRD3D1BNLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D1CX	-	VRD3D1CNLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D1DX	-	VRD3D1DNLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D1GX	-	VRD3D1GNLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D1HX	-	VRD3D1HNLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D1JX	-	VRD3D1JNLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D1KX	-	VRD3D1KPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D20X	-	VRD3D20PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D21X	-	VRD3D21PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D22X	-	VRD3D22PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D23X	-	VRD3D23PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D24X	-	VRD3D24PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D25X	-	VRD3D25PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D26X	-	VRD3D26PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D27X	-	VRD3D27PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D28X	-	VRD3D28PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D29X	-	VRD3D29PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D2AX	-	VRD3D2APLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D2BX	-	VRD3D2BPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D2CX	-	VRD3D2CPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D2DX	-	VRD3D2DPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D2EX	-	VRD3D2EPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D2FX	-	VRD3D2FPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D2GX	-	VRD3D2GPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D2HX	-	VRD3D2HPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D2JX	-	VRD3D2JPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D2KX	-	VRD3D2KPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3D30X	-	VRD3D30PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D31X	-	VRD3D31PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D32X	-	VRD3D32PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D33X	-	VRD3D33PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D34X	-	VRD3D34PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D35X	-	VRD3D35PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D36X	-	VRD3D36PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D37X	-	VRD3D37PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D38X	-	VRD3D38PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D39X	-	VRD3D39PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D3AX	-	VRD3D3APLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D3BX	-	VRD3D3BPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D3CX	-	VRD3D3CPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D3DX	-	VRD3D3DPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D3EX	-	VRD3D3EPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D3FX	-	VRD3D3FPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D3GX	-	VRD3D3GPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D3HX	-	VRD3D3HPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D3JX	-	VRD3D3JPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D3KX	-	VRD3D3KPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D40X	-	VRD3D40PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D41X	-	VRD3D41PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D42X	-	VRD3D42PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D43X	-	VRD3D43PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D44X	-	VRD3D44PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D45X	-	VRD3D45PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D46X	-	VRD3D46PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D47X	-	VRD3D47PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D48X	-	VRD3D48PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D49X	-	VRD3D49PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D4AX	-	VRD3D4APLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D4BX	-	VRD3D4BPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D4CX	-	VRD3D4CPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D4DX	-	VRD3D4DPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D4EX	-	VRD3D4EPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D4FX	-	VRD3D4FPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D4GX	-	VRD3D4GPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D4HX	-	VRD3D4HPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D4JX	-	VRD3D4JPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D4KX	-	VRD3D4KPLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D50X	-	VRD3D50PLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3D5X	-	VRD3D15NLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3DEX	-	VRD3D1ENLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3DFX	-	VRD3D1FNLX	LVR-IC	LDO, Dual out, Vo1=3.35V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E08X	-	VRD3E08NLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E09X	-	VRD3E09NLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E0JX	-	VRD3E0JNLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E0KX	-	VRD3E0KNLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E10X	-	VRD3E10NLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E11X	-	VRD3E11NLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E12X	-	VRD3E12NLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E13X	-	VRD3E13NLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E14X	-	VRD3E14NLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E15X	-	VRD3E15NLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E16X	-	VRD3E16NLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E17X	-	VRD3E17NLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E18X	-	VRD3E18NLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E19X	-	VRD3E19NLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E1AX	-	VRD3E1ANLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E1BX	-	VRD3E1BNLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E1CX	-	VRD3E1CNLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E1DX	-	VRD3E1DNLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E1EX	-	VRD3E1ENLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E1FX	-	VRD3E1FNLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E1GX	-	VRD3E1GNLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E1HX	-	VRD3E1HNLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E1JX	-	VRD3E1JNLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E1KX	-	VRD3E1KPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E20X	-	VRD3E20PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E21X	-	VRD3E21PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3E22X	-	VRD3E22PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E23X	-	VRD3E23PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E24X	-	VRD3E24PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E25X	-	VRD3E25PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E26X	-	VRD3E26PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E27X	-	VRD3E27PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E28X	-	VRD3E28PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E29X	-	VRD3E29PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E2AX	-	VRD3E2APLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E2BX	-	VRD3E2BPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E2CX	-	VRD3E2CPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E2DX	-	VRD3E2DPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E2EX	-	VRD3E2EPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E2FX	-	VRD3E2FPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E2GX	-	VRD3E2GPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E2HX	-	VRD3E2HPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E2JX	-	VRD3E2JPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E2KX	-	VRD3E2KPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E30X	-	VRD3E30PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E31X	-	VRD3E31PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E32X	-	VRD3E32PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E33X	-	VRD3E33PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E34X	-	VRD3E34PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E35X	-	VRD3E35PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E36X	-	VRD3E36PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E37X	-	VRD3E37PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E38X	-	VRD3E38PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E39X	-	VRD3E39PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E3AX	-	VRD3E3APLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E3BX	-	VRD3E3BPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E3CX	-	VRD3E3CPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E3DX	-	VRD3E3DPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E3EX	-	VRD3E3EPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E3FX	-	VRD3E3FPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E3GX	-	VRD3E3GPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E3HX	-	VRD3E3HPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E3JX	-	VRD3E3JPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E3KX	-	VRD3E3KPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E40X	-	VRD3E40PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E41X	-	VRD3E41PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E42X	-	VRD3E42PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E43X	-	VRD3E43PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E44X	-	VRD3E44PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E45X	-	VRD3E45PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E46X	-	VRD3E46PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E47X	-	VRD3E47PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E48X	-	VRD3E48PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E49X	-	VRD3E49PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E4AX	-	VRD3E4APLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E4BX	-	VRD3E4BPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E4CX	-	VRD3E4CPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E4DX	-	VRD3E4DPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E4EX	-	VRD3E4EPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E4FX	-	VRD3E4FPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E4GX	-	VRD3E4GPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E4HX	-	VRD3E4HPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E4JX	-	VRD3E4JPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E4KX	-	VRD3E4KPLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3E50X	-	VRD3E50PLX	LVR-IC	LDO, Dual out, Vo1=3.45V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F08X	-	VRD3F08NLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F09X	-	VRD3F09NLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F0JX	-	VRD3F0JNLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F0KX	-	VRD3F0KNLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F10X	-	VRD3F10NLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F11X	-	VRD3F11NLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F12X	-	VRD3F12NLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F13X	-	VRD3F13NLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F14X	-	VRD3F14NLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F15X	-	VRD3F15NLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F16X	-	VRD3F16NLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3F17X	-	VRD3F17NLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F18X	-	VRD3F18NLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F19X	-	VRD3F19NLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F1AX	-	VRD3F1ANLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F1BX	-	VRD3F1BNLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F1CX	-	VRD3F1CNLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F1DX	-	VRD3F1DNLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F1EX	-	VRD3F1ENLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F1FX	-	VRD3F1FNLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F1GX	-	VRD3F1GNLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F1HX	-	VRD3F1HNLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F1JX	-	VRD3F1JNLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F1KX	-	VRD3F1KPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F20X	-	VRD3F20PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F21X	-	VRD3F21PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F22X	-	VRD3F22PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F23X	-	VRD3F23PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F24X	-	VRD3F24PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F25X	-	VRD3F25PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F26X	-	VRD3F26PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F27X	-	VRD3F27PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F28X	-	VRD3F28PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F29X	-	VRD3F29PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F2AX	-	VRD3F2APLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F2BX	-	VRD3F2BPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F2CX	-	VRD3F2CPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F2DX	-	VRD3F2DPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F2EX	-	VRD3F2EPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F2FX	-	VRD3F2FPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F2GX	-	VRD3F2GPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F2HX	-	VRD3F2HPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F2JX	-	VRD3F2JPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F2KX	-	VRD3F2KPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F30X	-	VRD3F30PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F31X	-	VRD3F31PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F32X	-	VRD3F32PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F33X	-	VRD3F33PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F34X	-	VRD3F34PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F35X	-	VRD3F35PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F36X	-	VRD3F36PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F37X	-	VRD3F37PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F38X	-	VRD3F38PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F39X	-	VRD3F39PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F3AX	-	VRD3F3APLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F3BX	-	VRD3F3BPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F3CX	-	VRD3F3CPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F3DX	-	VRD3F3DPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F3EX	-	VRD3F3EPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F3FX	-	VRD3F3FPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F3GX	-	VRD3F3GPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F3HX	-	VRD3F3HPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F3JX	-	VRD3F3JPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F3KX	-	VRD3F3KPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F40X	-	VRD3F40PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F41X	-	VRD3F41PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F42X	-	VRD3F42PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F43X	-	VRD3F43PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F44X	-	VRD3F44PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F45X	-	VRD3F45PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F46X	-	VRD3F46PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F47X	-	VRD3F47PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F48X	-	VRD3F48PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F49X	-	VRD3F49PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F4AX	-	VRD3F4APLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F4BX	-	VRD3F4BPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F4CX	-	VRD3F4CPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F4DX	-	VRD3F4DPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F4EX	-	VRD3F4EPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F4FX	-	VRD3F4FPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F4GX	-	VRD3F4GPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3F4HX	-	VRD3F4HPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F4JX	-	VRD3F4JPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F4KX	-	VRD3F4KPLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3F50X	-	VRD3F50PLX	LVR-IC	LDO, Dual out, Vo1=3.55V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G08X	-	VRD3G08NLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G09X	-	VRD3G09NLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G0JX	-	VRD3G0JNLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G0KX	-	VRD3G0KNLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G10X	-	VRD3G10NLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G11X	-	VRD3G11NLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G12X	-	VRD3G12NLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G13X	-	VRD3G13NLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G14X	-	VRD3G14NLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G15X	-	VRD3G15NLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G16X	-	VRD3G16NLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G17X	-	VRD3G17NLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G18X	-	VRD3G18NLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G19X	-	VRD3G19NLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G1AX	-	VRD3G1ANLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G1BX	-	VRD3G1BNLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G1CX	-	VRD3G1CNLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G1DX	-	VRD3G1DNLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G1EX	-	VRD3G1ENLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G1FX	-	VRD3G1FNLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G1GX	-	VRD3G1GNLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G1HX	-	VRD3G1HNLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G1JX	-	VRD3G1JNLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G1KX	-	VRD3G1KPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G20X	-	VRD3G20PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G21X	-	VRD3G21PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G22X	-	VRD3G22PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G23X	-	VRD3G23PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G24X	-	VRD3G24PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G25X	-	VRD3G25PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G26X	-	VRD3G26PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G27X	-	VRD3G27PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G28X	-	VRD3G28PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G29X	-	VRD3G29PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G2AX	-	VRD3G2APLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G2BX	-	VRD3G2BPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G2CX	-	VRD3G2CPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G2DX	-	VRD3G2DPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G2EX	-	VRD3G2EPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G2FX	-	VRD3G2FPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G2GX	-	VRD3G2GPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G2HX	-	VRD3G2HPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G2JX	-	VRD3G2JPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G2KX	-	VRD3G2KPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G30X	-	VRD3G30PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G31X	-	VRD3G31PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G32X	-	VRD3G32PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G33X	-	VRD3G33PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G34X	-	VRD3G34PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G35X	-	VRD3G35PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G36X	-	VRD3G36PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G37X	-	VRD3G37PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G38X	-	VRD3G38PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G39X	-	VRD3G39PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G3AX	-	VRD3G3APLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G3BX	-	VRD3G3BPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G3CX	-	VRD3G3CPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G3DX	-	VRD3G3DPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G3EX	-	VRD3G3EPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G3FX	-	VRD3G3FPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G3GX	-	VRD3G3GPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G3HX	-	VRD3G3HPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G3JX	-	VRD3G3JPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G3KX	-	VRD3G3KPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G40X	-	VRD3G40PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G41X	-	VRD3G41PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3G42X	-	VRD3G42PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G43X	-	VRD3G43PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G44X	-	VRD3G44PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G45X	-	VRD3G45PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G46X	-	VRD3G46PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G47X	-	VRD3G47PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G48X	-	VRD3G48PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G49X	-	VRD3G49PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G4AX	-	VRD3G4APLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G4BX	-	VRD3G4BPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G4CX	-	VRD3G4CPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G4DX	-	VRD3G4DPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G4EX	-	VRD3G4EPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G4FX	-	VRD3G4FPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G4GX	-	VRD3G4GPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G4HX	-	VRD3G4HPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G4JX	-	VRD3G4JPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G4KX	-	VRD3G4KPLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3G50X	-	VRD3G50PLX	LVR-IC	LDO, Dual out, Vo1=3.65V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H08X	-	VRD3H08NLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H09X	-	VRD3H09NLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H0JX	-	VRD3H0JNLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H0KX	-	VRD3H0KNLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H10X	-	VRD3H10NLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H11X	-	VRD3H11NLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H12X	-	VRD3H12NLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H13X	-	VRD3H13NLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H14X	-	VRD3H14NLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H15X	-	VRD3H15NLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H16X	-	VRD3H16NLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H17X	-	VRD3H17NLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H18X	-	VRD3H18NLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H19X	-	VRD3H19NLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H1AX	-	VRD3H1ANLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H1BX	-	VRD3H1BNLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H1CX	-	VRD3H1CNLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H1DX	-	VRD3H1DNLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H1EX	-	VRD3H1ENLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H1FX	-	VRD3H1FNLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H1GX	-	VRD3H1GNLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H1HX	-	VRD3H1HNLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H1JX	-	VRD3H1JNLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H1KX	-	VRD3H1KPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H20X	-	VRD3H20PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H21X	-	VRD3H21PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H22X	-	VRD3H22PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H23X	-	VRD3H23PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H24X	-	VRD3H24PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H25X	-	VRD3H25PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H26X	-	VRD3H26PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H27X	-	VRD3H27PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H28X	-	VRD3H28PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H29X	-	VRD3H29PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H2AX	-	VRD3H2APLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H2BX	-	VRD3H2BPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H2CX	-	VRD3H2CPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H2DX	-	VRD3H2DPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H2EX	-	VRD3H2EPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H2FX	-	VRD3H2FPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H2GX	-	VRD3H2GPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H2HX	-	VRD3H2HPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H2JX	-	VRD3H2JPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H2KX	-	VRD3H2KPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H30X	-	VRD3H30PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H31X	-	VRD3H31PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H32X	-	VRD3H32PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H33X	-	VRD3H33PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H34X	-	VRD3H34PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H35X	-	VRD3H35PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H36X	-	VRD3H36PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3H37X	-	VRD3H37PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H38X	-	VRD3H38PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H39X	-	VRD3H39PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H3AX	-	VRD3H3APLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H3BX	-	VRD3H3BPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H3CX	-	VRD3H3CPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H3DX	-	VRD3H3DPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H3EX	-	VRD3H3EPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H3FX	-	VRD3H3FPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H3GX	-	VRD3H3GPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H3HX	-	VRD3H3HPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H3JX	-	VRD3H3JPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H3KX	-	VRD3H3KPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H40X	-	VRD3H40PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H41X	-	VRD3H41PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H42X	-	VRD3H42PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H43X	-	VRD3H43PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H44X	-	VRD3H44PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H45X	-	VRD3H45PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H46X	-	VRD3H46PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H47X	-	VRD3H47PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H48X	-	VRD3H48PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H49X	-	VRD3H49PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H4AX	-	VRD3H4APLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H4BX	-	VRD3H4BPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H4CX	-	VRD3H4CPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H4DX	-	VRD3H4DPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H4EX	-	VRD3H4EPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H4FX	-	VRD3H4FPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H4GX	-	VRD3H4GPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H4HX	-	VRD3H4HPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H4JX	-	VRD3H4JPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H4KX	-	VRD3H4KPLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3H50X	-	VRD3H50PLX	LVR-IC	LDO, Dual out, Vo1=3.75V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J08X	-	VRD3J08NLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J09X	-	VRD3J09NLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J0JX	-	VRD3J0JNLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J0KX	-	VRD3J0KNLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J10X	-	VRD3J10NLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J11X	-	VRD3J11NLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J12X	-	VRD3J12NLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J13X	-	VRD3J13NLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J14X	-	VRD3J14NLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J15X	-	VRD3J15NLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J16X	-	VRD3J16NLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J17X	-	VRD3J17NLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J18X	-	VRD3J18NLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J19X	-	VRD3J19NLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J1AX	-	VRD3J1ANLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J1BX	-	VRD3J1BNLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J1CX	-	VRD3J1CNLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J1DX	-	VRD3J1DNLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J1EX	-	VRD3J1ENLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J1FX	-	VRD3J1FNLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J1GX	-	VRD3J1GNLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J1HX	-	VRD3J1HNLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J1JX	-	VRD3J1JNLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J1KX	-	VRD3J1KPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J20X	-	VRD3J20PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J21X	-	VRD3J21PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J22X	-	VRD3J22PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J23X	-	VRD3J23PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J24X	-	VRD3J24PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J25X	-	VRD3J25PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J26X	-	VRD3J26PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J27X	-	VRD3J27PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J28X	-	VRD3J28PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J29X	-	VRD3J29PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J2AX	-	VRD3J2APLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J2BX	-	VRD3J2BPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3J2CX	-	VRD3J2CPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J2DX	-	VRD3J2DPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J2EX	-	VRD3J2EPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J2FX	-	VRD3J2FPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J2GX	-	VRD3J2GPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J2HX	-	VRD3J2HPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J2JX	-	VRD3J2JPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J2KX	-	VRD3J2KPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J30X	-	VRD3J30PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J31X	-	VRD3J31PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J32X	-	VRD3J32PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J33X	-	VRD3J33PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J34X	-	VRD3J34PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J35X	-	VRD3J35PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J36X	-	VRD3J36PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J37X	-	VRD3J37PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J38X	-	VRD3J38PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J39X	-	VRD3J39PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J3AX	-	VRD3J3APLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J3BX	-	VRD3J3BPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J3CX	-	VRD3J3CPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J3DX	-	VRD3J3DPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J3EX	-	VRD3J3EPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J3FX	-	VRD3J3FPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J3GX	-	VRD3J3GPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J3HX	-	VRD3J3HPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J3JX	-	VRD3J3JPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J3KX	-	VRD3J3KPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J40X	-	VRD3J40PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J41X	-	VRD3J41PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J42X	-	VRD3J42PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J43X	-	VRD3J43PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J44X	-	VRD3J44PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J45X	-	VRD3J45PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J46X	-	VRD3J46PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J47X	-	VRD3J47PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J48X	-	VRD3J48PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J49X	-	VRD3J49PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J4AX	-	VRD3J4APLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J4BX	-	VRD3J4BPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J4CX	-	VRD3J4CPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J4DX	-	VRD3J4DPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J4EX	-	VRD3J4EPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J4FX	-	VRD3J4FPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J4GX	-	VRD3J4GPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J4HX	-	VRD3J4HPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J4JX	-	VRD3J4JPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J4KX	-	VRD3J4KPLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3J50X	-	VRD3J50PLX	LVR-IC	LDO, Dual out, Vo1=3.85V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K08X	-	VRD3K08NLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K09X	-	VRD3K09NLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K0JX	-	VRD3K0JNLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K0KX	-	VRD3K0KNLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K10X	-	VRD3K10NLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K11X	-	VRD3K11NLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K12X	-	VRD3K12NLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K13X	-	VRD3K13NLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K14X	-	VRD3K14NLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K15X	-	VRD3K15NLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K16X	-	VRD3K16NLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K17X	-	VRD3K17NLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K18X	-	VRD3K18NLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K19X	-	VRD3K19NLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K1AX	-	VRD3K1ANLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K1BX	-	VRD3K1BNLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K1CX	-	VRD3K1CNLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K1DX	-	VRD3K1DNLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K1EX	-	VRD3K1ENLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K1FX	-	VRD3K1FNLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K1GX	-	VRD3K1GNLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D3K1HX	-	VRD3K1HNLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K1JX	-	VRD3K1JNLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K1KX	-	VRD3K1KPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K20X	-	VRD3K20PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K21X	-	VRD3K21PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K22X	-	VRD3K22PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K23X	-	VRD3K23PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K24X	-	VRD3K24PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K25X	-	VRD3K25PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K26X	-	VRD3K26PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K27X	-	VRD3K27PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K28X	-	VRD3K28PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K29X	-	VRD3K29PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K2AX	-	VRD3K2APLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K2BX	-	VRD3K2BPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K2CX	-	VRD3K2CPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K2DX	-	VRD3K2DPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K2EX	-	VRD3K2EPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K2FX	-	VRD3K2FPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K2GX	-	VRD3K2GPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K2HX	-	VRD3K2HPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K2JX	-	VRD3K2JPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K2KX	-	VRD3K2KPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K30X	-	VRD3K30PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K31X	-	VRD3K31PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K32X	-	VRD3K32PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K33X	-	VRD3K33PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K34X	-	VRD3K34PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K35X	-	VRD3K35PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K36X	-	VRD3K36PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K37X	-	VRD3K37PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K38X	-	VRD3K38PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K39X	-	VRD3K39PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K3AX	-	VRD3K3APLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K3BX	-	VRD3K3BPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K3CX	-	VRD3K3CPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K3DX	-	VRD3K3DPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K3EX	-	VRD3K3EPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K3FX	-	VRD3K3FPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K3GX	-	VRD3K3GPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K3HX	-	VRD3K3HPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K3JX	-	VRD3K3JPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K3KX	-	VRD3K3KPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K40X	-	VRD3K40PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K41X	-	VRD3K41PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K42X	-	VRD3K42PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K43X	-	VRD3K43PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K44X	-	VRD3K44PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K45X	-	VRD3K45PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K46X	-	VRD3K46PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K47X	-	VRD3K47PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K48X	-	VRD3K48PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K49X	-	VRD3K49PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K4AX	-	VRD3K4APLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K4BX	-	VRD3K4BPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K4CX	-	VRD3K4CPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K4DX	-	VRD3K4DPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K4EX	-	VRD3K4EPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K4FX	-	VRD3K4FPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K4GX	-	VRD3K4GPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K4HX	-	VRD3K4HPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K4JX	-	VRD3K4JPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K4KX	-	VRD3K4KPLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D3K50X	-	VRD3K50PLX	LVR-IC	LDO, Dual out, Vo1=3.95V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4	-	BC847AM	Si-npn	GP, 50V, 100mA, 250mW, B=110..220, >100MHz	SOT-883	22ta	-	2a	PhH
D4	-	BZX884-C22	Z-diode	22V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
D4	-	R3118K401A	Vdet-IC	4.0V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
D4	-	RP109L221B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
D4	-	XC6221A3517R	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
D4	-	XC6223F14B9R-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4	-	XC6GC3402HR	Vdet-IC	3.4V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
D4	-	XC9245A12C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.2V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
D4008X	-	VRD4008NLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4009X	-	VRD4009NLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D400JX	-	VRD400JNLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D400KX	-	VRD400KNLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4010X	-	VRD4010NLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4011X	-	VRD4011NLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4012X	-	VRD4012NLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4013X	-	VRD4013NLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4014X	-	VRD4014NLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4015X	-	VRD4015NLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4016X	-	VRD4016NLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4017X	-	VRD4017NLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4018X	-	VRD4018NLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4019X	-	VRD4019NLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D401AX	-	VRD401ANLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D401BX	-	VRD401BNLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D401CX	-	VRD401CNLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D401DX	-	VRD401DNLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D401EX	-	VRD401ENLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D401FX	-	VRD401FNLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D401GX	-	VRD401GNLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D401HX	-	VRD401HNLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D401JX	-	VRD401JNLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D401KX	-	VRD401KPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4020X	-	VRD4020PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4021X	-	VRD4021PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4022X	-	VRD4022PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4023X	-	VRD4023PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4024X	-	VRD4024PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4025X	-	VRD4025PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4026X	-	VRD4026PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4027X	-	VRD4027PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4028X	-	VRD4028PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4029X	-	VRD4029PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D402AX	-	VRD402APLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D402BX	-	VRD402BPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D402CX	-	VRD402CPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D402DX	-	VRD402DPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D402EX	-	VRD402EPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D402FX	-	VRD402FPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D402GX	-	VRD402GPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D402HX	-	VRD402HPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D402JX	-	VRD402JPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D402KX	-	VRD402KPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4030X	-	VRD4030PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4031X	-	VRD4031PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4032X	-	VRD4032PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4033X	-	VRD4033PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4034X	-	VRD4034PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4035X	-	VRD4035PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4036X	-	VRD4036PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4037X	-	VRD4037PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4038X	-	VRD4038PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4039X	-	VRD4039PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D403AX	-	VRD403APLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D403BX	-	VRD403BPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D403CX	-	VRD403CPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D403DX	-	VRD403DPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D403EX	-	VRD403EPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D403FX	-	VRD403FPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D403GX	-	VRD403GPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D403HX	-	VRD403HPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D403JX	-	VRD403JPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D403KX	-	VRD403KPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4040X	-	VRD4040PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4041X	-	VRD4041PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4042X	-	VRD4042PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4043X	-	VRD4043PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4044X	-	VRD4044PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4045X	-	VRD4045PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4046X	-	VRD4046PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4047X	-	VRD4047PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4048X	-	VRD4048PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4049X	-	VRD4049PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D404AX	-	VRD404APLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D404BX	-	VRD404BPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D404CX	-	VRD404CPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D404DX	-	VRD404DPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D404EX	-	VRD404EPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D404FX	-	VRD404FPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D404GX	-	VRD404GPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D404HX	-	VRD404HPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D404JX	-	VRD404JPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D404KX	-	VRD404KPLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4050X	-	VRD4050PLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4108X	-	VRD4108NLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4109X	-	VRD4109NLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D410JX	-	VRD410JNLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D410KX	-	VRD410KNLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4110X	-	VRD4110NLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4111X	-	VRD4111NLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4112X	-	VRD4112NLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4113X	-	VRD4113NLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4114X	-	VRD4114NLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4115X	-	VRD4115NLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4116X	-	VRD4116NLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4117X	-	VRD4117NLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4118X	-	VRD4118NLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4119X	-	VRD4119NLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D411AX	-	VRD411ANLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D411BX	-	VRD411BNLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D411CX	-	VRD411CNLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D411DX	-	VRD411DNLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D411EX	-	VRD411ENLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D411FX	-	VRD411FNLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D411GX	-	VRD411GNLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D411HX	-	VRD411HNLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D411JX	-	VRD411JNLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D411KX	-	VRD411KPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4120X	-	VRD4120PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4121X	-	VRD4121PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4122X	-	VRD4122PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4123X	-	VRD4123PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4124X	-	VRD4124PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4125X	-	VRD4125PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4126X	-	VRD4126PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4127X	-	VRD4127PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4128X	-	VRD4128PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4129X	-	VRD4129PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D412AX	-	VRD412APLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D412BX	-	VRD412BPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D412CX	-	VRD412CPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D412DX	-	VRD412DPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D412EX	-	VRD412EPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D412FX	-	VRD412FPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D412GX	-	VRD412GPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D412HX	-	VRD412HPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D412JX	-	VRD412JPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D412KX	-	VRD412KPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4130X	-	VRD4130PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4131X	-	VRD4131PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4132X	-	VRD4132PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4133X	-	VRD4133PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4134X	-	VRD4134PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4135X	-	VRD4135PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4136X	-	VRD4136PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4137X	-	VRD4137PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4138X	-	VRD4138PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4139X	-	VRD4139PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D413AX	-	VRD413APLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D413BX	-	VRD413BPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D413CX	-	VRD413CPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D413DX	-	VRD413DPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D413EX	-	VRD413EPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D413FX	-	VRD413FPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D413GX	-	VRD413GPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D413HX	-	VRD413HPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D413JX	-	VRD413JPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D413KX	-	VRD413KPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4140X	-	VRD4140PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4141X	-	VRD4141PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4142X	-	VRD4142PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4143X	-	VRD4143PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4144X	-	VRD4144PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4145X	-	VRD4145PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4146X	-	VRD4146PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4147X	-	VRD4147PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4148X	-	VRD4148PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4149X	-	VRD4149PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D414AX	-	VRD414APLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D414BX	-	VRD414BPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D414CX	-	VRD414CPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D414DX	-	VRD414DPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D414EX	-	VRD414EPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D414FX	-	VRD414FPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D414GX	-	VRD414GPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D414HX	-	VRD414HPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D414JX	-	VRD414JPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D414KX	-	VRD414KPLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4150X	-	VRD4150PLX	LVR-IC	LDO, Dual out, Vo1=4.1V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4208X	-	VRD4208NLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4209X	-	VRD4209NLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D420JX	-	VRD420JNLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D420KX	-	VRD420KNLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4210X	-	VRD4210NLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4211X	-	VRD4211NLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4212X	-	VRD4212NLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4213X	-	VRD4213NLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4214X	-	VRD4214NLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4215X	-	VRD4215NLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4216X	-	VRD4216NLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4217X	-	VRD4217NLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4218X	-	VRD4218NLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4219X	-	VRD4219NLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D421AX	-	VRD421ANLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D421BX	-	VRD421BNLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D421CX	-	VRD421CNLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D421DX	-	VRD421DNLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D421EX	-	VRD421ENLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D421FX	-	VRD421FNLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D421GX	-	VRD421GNLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D421HX	-	VRD421HNLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D421JX	-	VRD421JNLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D421KX	-	VRD421KPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4220X	-	VRD4220PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4221X	-	VRD4221PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4222X	-	VRD4222PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4223X	-	VRD4223PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4224X	-	VRD4224PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4225X	-	VRD4225PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4226X	-	VRD4226PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4227X	-	VRD4227PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4228X	-	VRD4228PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4229X	-	VRD4229PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D422AX	-	VRD422APLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D422BX	-	VRD422BPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D422CX	-	VRD422CPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D422DX	-	VRD422DPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D422EX	-	VRD422EPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D422FX	-	VRD422FPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D422GX	-	VRD422GPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D422HX	-	VRD422HPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D422JX	-	VRD422JPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D422KX	-	VRD422KPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4230X	-	VRD4230PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4231X	-	VRD4231PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4232X	-	VRD4232PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4233X	-	VRD4233PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4234X	-	VRD4234PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4235X	-	VRD4235PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4236X	-	VRD4236PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4237X	-	VRD4237PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4238X	-	VRD4238PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4239X	-	VRD4239PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D423AX	-	VRD423APLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D423BX	-	VRD423BPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D423CX	-	VRD423CPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D423DX	-	VRD423DPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D423EX	-	VRD423EPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D423FX	-	VRD423FPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D423GX	-	VRD423GPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D423HX	-	VRD423HPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D423JX	-	VRD423JPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D423KX	-	VRD423KPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4240X	-	VRD4240PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4241X	-	VRD4241PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4242X	-	VRD4242PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4243X	-	VRD4243PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4244X	-	VRD4244PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4245X	-	VRD4245PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4246X	-	VRD4246PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4247X	-	VRD4247PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4248X	-	VRD4248PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4249X	-	VRD4249PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D424AX	-	VRD424APLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D424BX	-	VRD424BPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D424CX	-	VRD424CPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D424DX	-	VRD424DPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D424EX	-	VRD424EPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D424FX	-	VRD424FPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D424GX	-	VRD424GPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D424HX	-	VRD424HPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D424JX	-	VRD424JPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D424KX	-	VRD424KPLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4250X	-	VRD4250PLX	LVR-IC	LDO, Dual out, Vo1=4.2V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D43	-	XC61GC3402HR	Vdet-IC	3.4V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
D4308X	-	VRD4308NLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4309X	-	VRD4309NLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D430JX	-	VRD430JNLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D430KX	-	VRD430KNLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4310X	-	VRD4310NLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4311X	-	VRD4311NLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4312X	-	VRD4312NLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4313X	-	VRD4313NLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4314X	-	VRD4314NLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4315X	-	VRD4315NLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4316X	-	VRD4316NLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4317X	-	VRD4317NLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4318X	-	VRD4318NLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4319X	-	VRD4319NLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D431AX	-	VRD431ANLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D431BX	-	VRD431BNLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D431CX	-	VRD431CNLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D431DX	-	VRD431DNLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D431EX	-	VRD431ENLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D431FX	-	VRD431FNLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D431GX	-	VRD431GNLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D431HX	-	VRD431HNLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D431JX	-	VRD431JNLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D431KX	-	VRD431KPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4320X	-	VRD4320PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4321X	-	VRD4321PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4322X	-	VRD4322PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4323X	-	VRD4323PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4324X	-	VRD4324PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4325X	-	VRD4325PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4326X	-	VRD4326PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4327X	-	VRD4327PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4328X	-	VRD4328PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4329X	-	VRD4329PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D432AX	-	VRD432APLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D432BX	-	VRD432BPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D432CX	-	VRD432CPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D432DX	-	VRD432DPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D432EX	-	VRD432EPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D432FX	-	VRD432FPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D432GX	-	VRD432GPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D432HX	-	VRD432HPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D432JX	-	VRD432JPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D432KX	-	VRD432KPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4330X	-	VRD4330PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4331X	-	VRD4331PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4332X	-	VRD4332PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4333X	-	VRD4333PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4334X	-	VRD4334PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4335X	-	VRD4335PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4336X	-	VRD4336PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4337X	-	VRD4337PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4338X	-	VRD4338PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4339X	-	VRD4339PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D433AX	-	VRD433APLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D433BX	-	VRD433BPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D433CX	-	VRD433CPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D433DX	-	VRD433DPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D433EX	-	VRD433EPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D433FX	-	VRD433FPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D433GX	-	VRD433GPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D433HX	-	VRD433HPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D433JX	-	VRD433JPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D433KX	-	VRD433KPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4340X	-	VRD4340PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4341X	-	VRD4341PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4342X	-	VRD4342PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4343X	-	VRD4343PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4344X	-	VRD4344PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4345X	-	VRD4345PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4346X	-	VRD4346PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4347X	-	VRD4347PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4348X	-	VRD4348PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4349X	-	VRD4349PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D434AX	-	VRD434APLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D434BX	-	VRD434BPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D434CX	-	VRD434CPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D434DX	-	VRD434DPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D434EX	-	VRD434EPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D434FX	-	VRD434FPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D434GX	-	VRD434GPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D434HX	-	VRD434HPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D434JX	-	VRD434JPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D434KX	-	VRD434KPLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4350X	-	VRD4350PLX	LVR-IC	LDO, Dual out, Vo1=4.3V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4408X	-	VRD4408NLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4409X	-	VRD4409NLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D440JX	-	VRD440JNLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D440KX	-	VRD440KNLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4410X	-	VRD4410NLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4411X	-	VRD4411NLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4412X	-	VRD4412NLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4413X	-	VRD4413NLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4414X	-	VRD4414NLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4415X	-	VRD4415NLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4416X	-	VRD4416NLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4417X	-	VRD4417NLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4418X	-	VRD4418NLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4419X	-	VRD4419NLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D441AX	-	VRD441ANLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D441BX	-	VRD441BNLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D441CX	-	VRD441CNLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D441DX	-	VRD441DNLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D441EX	-	VRD441ENLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D441FX	-	VRD441FNLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D441GX	-	VRD441GNLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D441HX	-	VRD441HNLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D441JX	-	VRD441JNLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D441KX	-	VRD441KPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4420X	-	VRD4420PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4421X	-	VRD4421PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4422X	-	VRD4422PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4423X	-	VRD4423PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4424X	-	VRD4424PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4425X	-	VRD4425PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4426X	-	VRD4426PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4427X	-	VRD4427PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4428X	-	VRD4428PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4429X	-	VRD4429PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D442AX	-	VRD442APLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D442BX	-	VRD442BPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D442CX	-	VRD442CPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D442DX	-	VRD442DPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D442EX	-	VRD442EPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D442FX	-	VRD442FPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D442GX	-	VRD442GPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D442HX	-	VRD442HPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D442JX	-	VRD442JPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D442KX	-	VRD442KPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4430X	-	VRD4430PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4431X	-	VRD4431PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4432X	-	VRD4432PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4433X	-	VRD4433PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4434X	-	VRD4434PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4435X	-	VRD4435PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4436X	-	VRD4436PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4437X	-	VRD4437PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4438X	-	VRD4438PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4439X	-	VRD4439PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D443AX	-	VRD443APLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D443BX	-	VRD443BPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D443CX	-	VRD443CPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D443DX	-	VRD443DPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D443EX	-	VRD443EPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D443FX	-	VRD443FPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D443GX	-	VRD443GPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D443HX	-	VRD443HPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D443JX	-	VRD443JPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D443KX	-	VRD443KPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4440X	-	VRD4440PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4441X	-	VRD4441PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4442X	-	VRD4442PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4443X	-	VRD4443PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4444X	-	VRD4444PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4445X	-	VRD4445PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4446X	-	VRD4446PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4447X	-	VRD4447PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4448X	-	VRD4448PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4449X	-	VRD4449PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D444AX	-	VRD444APLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D444BX	-	VRD444BPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D444CX	-	VRD444CPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D444DX	-	VRD444DPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D444EX	-	VRD444EPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D444FX	-	VRD444FPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D444GX	-	VRD444GPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D444HX	-	VRD444HPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D444JX	-	VRD444JPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D444KX	-	VRD444KPLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4450X	-	VRD4450PLX	LVR-IC	LDO, Dual out, Vo1=4.4V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4508X	-	VRD4508NLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4509X	-	VRD4509NLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D450JX	-	VRD450JNLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D450KX	-	VRD450KNLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4510X	-	VRD4510NLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4511X	-	VRD4511NLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4512X	-	VRD4512NLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4513X	-	VRD4513NLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4514X	-	VRD4514NLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4515X	-	VRD4515NLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4516X	-	VRD4516NLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4517X	-	VRD4517NLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4518X	-	VRD4518NLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4519X	-	VRD4519NLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D451AX	-	VRD451ANLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D451BX	-	VRD451BNLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D451CX	-	VRD451CNLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D451DX	-	VRD451DNLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D451EX	-	VRD451ENLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D451FX	-	VRD451FNLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D451GX	-	VRD451GNLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D451HX	-	VRD451HNLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D451JX	-	VRD451JNLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D451KX	-	VRD451KPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4520X	-	VRD4520PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4521X	-	VRD4521PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4522X	-	VRD4522PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4523X	-	VRD4523PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4524X	-	VRD4524PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4525X	-	VRD4525PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4526X	-	VRD4526PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4527X	-	VRD4517PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4528X	-	VRD4528PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4529X	-	VRD4529PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D452AX	-	VRD452APLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D452BX	-	VRD452BPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D452CX	-	VRD452CPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D452DX	-	VRD452DPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D452EX	-	VRD452EPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D452FX	-	VRD452FPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D452GX	-	VRD452GPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D452HX	-	VRD452HPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D452JX	-	VRD452JPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D452KX	-	VRD452KPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4530X	-	VRD4530PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4531X	-	VRD4531PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4532X	-	VRD4532PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4533X	-	VRD4533PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4534X	-	VRD4534PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4535X	-	VRD4535PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4536X	-	VRD4536PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4537X	-	VRD4537PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4538X	-	VRD4538PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4539X	-	VRD4539PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D453AX	-	VRD453APLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D453BX	-	VRD453BPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D453CX	-	VRD453CPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D453DX	-	VRD453DPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D453EX	-	VRD453EPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D453FX	-	VRD453FPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D453GX	-	VRD453GPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D453HX	-	VRD453HPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D453JX	-	VRD453JPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D453KX	-	VRD453KPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4540X	-	VRD4540PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4541X	-	VRD4541PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4542X	-	VRD4542PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4543X	-	VRD4543PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4544X	-	VRD4544PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4545X	-	VRD4545PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4546X	-	VRD4546PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4547X	-	VRD4547PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4548X	-	VRD4548PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4549X	-	VRD4549PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D454AX	-	VRD454APLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D454BX	-	VRD454BPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D454CX	-	VRD454CPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D454DX	-	VRD454DPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D454EX	-	VRD454EPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D454FX	-	VRD454FPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D454GX	-	VRD454GPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D454HX	-	VRD454HPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D454JX	-	VRD454JPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D454KX	-	VRD454KPLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4550X	-	VRD4550PLX	LVR-IC	LDO, Dual out, Vo1=4.5V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4608X	-	VRD4608NLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4609X	-	VRD4609NLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D460JX	-	VRD460JNLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D460KX	-	VRD460KNLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4610X	-	VRD4610NLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4611X	-	VRD4611NLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4612X	-	VRD4612NLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4613X	-	VRD4613NLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4614X	-	VRD4614NLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4615X	-	VRD4615NLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4616X	-	VRD4616NLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4617X	-	VRD4617NLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4618X	-	VRD4618NLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4619X	-	VRD4619NLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D461AX	-	VRD461ANLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D461BX	-	VRD461BNLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D461CX	-	VRD461CNLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D461DX	-	VRD461DNLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D461EX	-	VRD461ENLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D461FX	-	VRD461FNLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D461GX	-	VRD461GNLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D461HX	-	VRD461HNLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D461JX	-	VRD461JNLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D461KX	-	VRD461KPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4620X	-	VRD4620PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4621X	-	VRD4621PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4622X	-	VRD4622PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4623X	-	VRD4623PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4624X	-	VRD4624PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4625X	-	VRD4625PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4626X	-	VRD4626PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4627X	-	VRD4627PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4628X	-	VRD4628PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4629X	-	VRD4629PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D462AX	-	VRD462APLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D462BX	-	VRD462BPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D462CX	-	VRD462CPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D462DX	-	VRD462DPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D462EX	-	VRD462EPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D462FX	-	VRD462FPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D462GX	-	VRD462GPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D462HX	-	VRD462HPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D462JX	-	VRD462JPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D462KX	-	VRD462KPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4630X	-	VRD4630PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4631X	-	VRD4631PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4632X	-	VRD4632PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4633X	-	VRD4633PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4634X	-	VRD4634PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4635X	-	VRD4635PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4636X	-	VRD4636PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4637X	-	VRD4637PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4638X	-	VRD4638PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4639X	-	VRD4639PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D463AX	-	VRD463APLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D463BX	-	VRD463BPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D463CX	-	VRD463CPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D463DX	-	VRD463DPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D463EX	-	VRD463EPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D463FX	-	VRD463FPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D463GX	-	VRD463GPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D463HX	-	VRD463HPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D463JX	-	VRD463JPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D463KX	-	VRD463KPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4640X	-	VRD4640PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4641X	-	VRD4641PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4642X	-	VRD4642PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4643X	-	VRD4643PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4644X	-	VRD4644PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4645X	-	VRD4645PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4646X	-	VRD4646PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4647X	-	VRD4647PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4648X	-	VRD4648PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4649X	-	VRD4649PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D464AX	-	VRD464APLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D464BX	-	VRD464BPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D464CX	-	VRD464CPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D464DX	-	VRD464DPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D464EX	-	VRD464EPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D464FX	-	VRD464FPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D464GX	-	VRD464GPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D464HX	-	VRD464HPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D464JX	-	VRD464JPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D464KX	-	VRD464KPLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4650X	-	VRD4650PLX	LVR-IC	LDO, Dual out, Vo1=4.6V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4708X	-	VRD4708NLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4709X	-	VRD4709NLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D470JX	-	VRD470JNLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D470KX	-	VRD470KNLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4710X	-	VRD4710NLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4711X	-	VRD4711NLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4712X	-	VRD4712NLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4713X	-	VRD4713NLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4714X	-	VRD4714NLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4715X	-	VRD4715NLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4716X	-	VRD4716NLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4717X	-	VRD4717NLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4718X	-	VRD4718NLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4719X	-	VRD4719NLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D471AX	-	VRD471ANLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D471BX	-	VRD471BNLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D471CX	-	VRD471CNLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D471DX	-	VRD471DNLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D471EX	-	VRD471ENLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D471FX	-	VRD471FNLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D471GX	-	VRD471GNLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D471HX	-	VRD471HNLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D471JX	-	VRD471JNLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D471KX	-	VRD471KPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4720X	-	VRD4720PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4721X	-	VRD4721PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4722X	-	VRD4722PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4723X	-	VRD4723PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4724X	-	VRD4724PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4725X	-	VRD4725PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4726X	-	VRD4726PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4727X	-	VRD4727PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4728X	-	VRD4728PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4729X	-	VRD4729PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D472AX	-	VRD472APLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D472BX	-	VRD472BPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D472CX	-	VRD472CPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D472DX	-	VRD472DPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D472EX	-	VRD472EPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D472FX	-	VRD472FPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D472GX	-	VRD472GPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D472HX	-	VRD472HPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D472JX	-	VRD472JPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D472KX	-	VRD472KPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4730X	-	VRD4730PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4731X	-	VRD4731PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4732X	-	VRD4732PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4733X	-	VRD4733PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4734X	-	VRD4734PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4735X	-	VRD4735PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4736X	-	VRD4736PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4737X	-	VRD4737PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4738X	-	VRD4738PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4739X	-	VRD4739PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D473AX	-	VRD473APLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D473BX	-	VRD473BPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D473CX	-	VRD473CPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D473DX	-	VRD473DPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D473EX	-	VRD473EPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D473FX	-	VRD473FPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D473GX	-	VRD473GPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D473HX	-	VRD473HPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D473JX	-	VRD473JPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D473KX	-	VRD473KPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4740X	-	VRD4740PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4741X	-	VRD4741PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4742X	-	VRD4742PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4743X	-	VRD4743PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4744X	-	VRD4744PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4745X	-	VRD4745PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4746X	-	VRD4746PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4747X	-	VRD4747PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4748X	-	VRD4748PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4749X	-	VRD4749PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D474AX	-	VRD474APLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D474BX	-	VRD474BPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D474CX	-	VRD474CPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D474DX	-	VRD474DPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D474EX	-	VRD474EPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D474FX	-	VRD474FPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D474GX	-	VRD474GPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D474HX	-	VRD474HPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D474JX	-	VRD474JPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D474KX	-	VRD474KPLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4750X	-	VRD4750PLX	LVR-IC	LDO, Dual out, Vo1=4.7V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4808X	-	VRD4808NLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4809X	-	VRD4809NLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D480JX	-	VRD480JNLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D480KX	-	VRD480KNLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4810X	-	VRD4810NLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4811X	-	VRD4811NLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4812X	-	VRD4812NLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4813X	-	VRD4813NLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4814X	-	VRD4814NLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4815X	-	VRD4815NLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4816X	-	VRD4816NLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4817X	-	VRD4817NLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4818X	-	VRD4818NLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4819X	-	VRD4819NLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D481AX	-	VRD481ANLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D481BX	-	VRD481BNLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D481CX	-	VRD481CNLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D481DX	-	VRD481DNLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D481EX	-	VRD481ENLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D481FX	-	VRD481FNLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D481GX	-	VRD481GNLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D481HX	-	VRD481HNLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D481JX	-	VRD481JNLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D481KX	-	VRD481KPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4820X	-	VRD4820PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4821X	-	VRD4821PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4822X	-	VRD4822PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4823X	-	VRD4823PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4824X	-	VRD4824PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4825X	-	VRD4825PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4826X	-	VRD4826PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4827X	-	VRD4827PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4828X	-	VRD4828PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4829X	-	VRD4829PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D482AX	-	VRD482APLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D482BX	-	VRD482BPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D482CX	-	VRD482CPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D482DX	-	VRD482DPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D482EX	-	VRD482EPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D482FX	-	VRD482FPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D482GX	-	VRD482GPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D482HX	-	VRD482HPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D482JX	-	VRD482JPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D482KX	-	VRD482KPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4830X	-	VRD4830PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4831X	-	VRD4831PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4832X	-	VRD4832PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4833X	-	VRD4833PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4834X	-	VRD4834PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4835X	-	VRD4835PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4836X	-	VRD4836PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4837X	-	VRD4837PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4838X	-	VRD4838PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4839X	-	VRD4839PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D483AX	-	VRD483APLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D483BX	-	VRD483BPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D483CX	-	VRD483CPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D483DX	-	VRD483DPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D483EX	-	VRD483EPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D483FX	-	VRD483FPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D483GX	-	VRD483GPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D483HX	-	VRD483HPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D483JX	-	VRD483JPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D483KX	-	VRD483KPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4840X	-	VRD4840PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4841X	-	VRD4841PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4842X	-	VRD4842PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4843X	-	VRD4843PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4844X	-	VRD4844PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4845X	-	VRD4845PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4846X	-	VRD4846PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4847X	-	VRD4847PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4848X	-	VRD4848PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4849X	-	VRD4849PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D484AX	-	VRD484APLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D484BX	-	VRD484BPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D484CX	-	VRD484CPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D484DX	-	VRD484DPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D484EX	-	VRD484EPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D484FX	-	VRD484FPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D484GX	-	VRD484GPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D484HX	-	VRD484HPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D484JX	-	VRD484JPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D484KX	-	VRD484KPLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4850X	-	VRD4850PLX	LVR-IC	LDO, Dual out, Vo1=4.8V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4908X	-	VRD4908NLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4909X	-	VRD4909NLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D490JX	-	VRD490JNLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D490KX	-	VRD490KNLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4910X	-	VRD4910NLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4911X	-	VRD4911NLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4912X	-	VRD4912NLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4913X	-	VRD4913NLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4914X	-	VRD4914NLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4915X	-	VRD4915NLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4916X	-	VRD4916NLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4917X	-	VRD4917NLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4918X	-	VRD4918NLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4919X	-	VRD4919NLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D491AX	-	VRD491ANLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D491BX	-	VRD491BNLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D491CX	-	VRD491CNLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D491DX	-	VRD491DNLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D491EX	-	VRD491ENLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D491FX	-	VRD491FNLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D491GX	-	VRD491GNLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D491HX	-	VRD491HNLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D491JX	-	VRD491JNLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D491KX	-	VRD491KPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4920X	-	VRD4920PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4921X	-	VRD4921PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4922X	-	VRD4922PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4923X	-	VRD4923PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4924X	-	VRD4924PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4925X	-	VRD4925PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4926X	-	VRD4926PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4927X	-	VRD4927PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4928X	-	VRD4928PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4929X	-	VRD4929PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D492AX	-	VRD492APLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D492BX	-	VRD492BPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D492CX	-	VRD492CPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D492DX	-	VRD492DPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D492EX	-	VRD492EPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D492FX	-	VRD492FPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D492GX	-	VRD492GPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D492HX	-	VRD492HPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D492JX	-	VRD492JPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D492KX	-	VRD492KPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4930X	-	VRD4930PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4931X	-	VRD4931PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4932X	-	VRD4932PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4933X	-	VRD4933PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4934X	-	VRD4934PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4935X	-	VRD4935PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4936X	-	VRD4936PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4937X	-	VRD4937PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4938X	-	VRD4938PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4939X	-	VRD4939PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D493AX	-	VRD493APLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D493BX	-	VRD493BPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D493CX	-	VRD493CPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D493DX	-	VRD493DPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D493EX	-	VRD493EPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D493FX	-	VRD493FPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D493GX	-	VRD493GPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D493HX	-	VRD493HPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D493JX	-	VRD493JPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D493KX	-	VRD493KPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4940X	-	VRD4940PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4941X	-	VRD4941PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4942X	-	VRD4942PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4943X	-	VRD4943PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4944X	-	VRD4944PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4945X	-	VRD4945PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4946X	-	VRD4946PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4947X	-	VRD4947PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4948X	-	VRD4948PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4949X	-	VRD4949PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D494AX	-	VRD494APLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D494BX	-	VRD494BPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D494CX	-	VRD494CPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D494DX	-	VRD494DPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D494EX	-	VRD494EPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D494FX	-	VRD494FPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D494GX	-	VRD494GPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D494HX	-	VRD494HPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D494JX	-	VRD494JPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D494KX	-	VRD494KPLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4950X	-	VRD4950PLX	LVR-IC	LDO, Dual out, Vo1=4.9V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A	-	XC6108C34AGR	Vdet-IC	3.4V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D4A08X	-	VRD4A08NLX	LVR-IC	LDO, Dual out, Vo1=4.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A09X	-	VRD4A09NLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A0JX	-	VRD4A0JNLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A0KX	-	VRD4A0KNLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A10X	-	VRD4A10NLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A11X	-	VRD4A11NLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A12X	-	VRD4A12NLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A13X	-	VRD4A13NLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A14X	-	VRD4A14NLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A15X	-	VRD4A15NLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A16X	-	VRD4A16NLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A17X	-	VRD4A17NLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A18X	-	VRD4A18NLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A19X	-	VRD4A19NLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A1AX	-	VRD4A1ANLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A1BX	-	VRD4A1BNLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A1CX	-	VRD4A1CNLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A1DX	-	VRD4A1DNLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A1EX	-	VRD4A1ENLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A1FX	-	VRD4A1FNLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A1GX	-	VRD4A1GNLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A1HX	-	VRD4A1HNLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A1JX	-	VRD4A1JNLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A1KX	-	VRD4A1KPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A20X	-	VRD4A20PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A21X	-	VRD4A21PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A22X	-	VRD4A22PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A23X	-	VRD4A23PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A24X	-	VRD4A24PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A25X	-	VRD4A25PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A26X	-	VRD4A26PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A27X	-	VRD4A27PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A28X	-	VRD4A28PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A29X	-	VRD4A29PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A2AX	-	VRD4A2APLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A2BX	-	VRD4A2BPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A2CX	-	VRD4A2CPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A2DX	-	VRD4A2DPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A2EX	-	VRD4A2EPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A2FX	-	VRD4A2FPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A2GX	-	VRD4A2GPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A2HX	-	VRD4A2HPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A2JX	-	VRD4A2JPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A2KX	-	VRD4A2KPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A30X	-	VRD4A30PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A31X	-	VRD4A31PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A32X	-	VRD4A32PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A33X	-	VRD4A33PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A34X	-	VRD4A34PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A35X	-	VRD4A35PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A36X	-	VRD4A36PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A37X	-	VRD4A37PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A38X	-	VRD4A38PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A39X	-	VRD4A39PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A3AX	-	VRD4A3APLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A3BX	-	VRD4A3BPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4A3CX	-	VRD4A3CPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A3DX	-	VRD4A3DPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A3EX	-	VRD4A3EPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A3FX	-	VRD4A3FPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A3GX	-	VRD4A3GPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A3HX	-	VRD4A3HPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A3JX	-	VRD4A3JPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A3KX	-	VRD4A3KPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A40X	-	VRD4A40PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A41X	-	VRD4A41PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A42X	-	VRD4A42PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A43X	-	VRD4A43PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A44X	-	VRD4A44PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A45X	-	VRD4A45PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A46X	-	VRD4A46PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A47X	-	VRD4A47PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A48X	-	VRD4A48PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A49X	-	VRD4A49PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A4AX	-	VRD4A4APLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A4BX	-	VRD4A4BPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A4CX	-	VRD4A4CPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A4DX	-	VRD4A4DPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A4EX	-	VRD4A4EPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A4FX	-	VRD4A4FPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A4GX	-	VRD4A4GPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A4HX	-	VRD4A4HPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A4JX	-	VRD4A4JPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A4KX	-	VRD4A4KPLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4A50X	-	VRD4A50PLX	LVR-IC	LDO, Dual out, Vo1=4.05V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B	-	XC6108C34BGR	Vdet-IC	3.4V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D4B08X	-	VRD4B08NLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B09X	-	VRD4B09NLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B0JX	-	VRD4B0JNLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B0KX	-	VRD4B0KNLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B10X	-	VRD4B10NLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B11X	-	VRD4B11NLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B12X	-	VRD4B12NLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B13X	-	VRD4B13NLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B14X	-	VRD4B14NLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B15X	-	VRD4B15NLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B16X	-	VRD4B16NLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B17X	-	VRD4B17NLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B18X	-	VRD4B18NLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B19X	-	VRD4B19NLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B1AX	-	VRD4B1ANLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B1BX	-	VRD4B1BNLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B1CX	-	VRD4B1CNLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B1DX	-	VRD4B1DNLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B1EX	-	VRD4B1ENLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B1FX	-	VRD4B1FNLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B1GX	-	VRD4B1GNLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B1HX	-	VRD4B1HNLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B1JX	-	VRD4B1JNLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B1KX	-	VRD4B1KPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B20X	-	VRD4B20PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B21X	-	VRD4B21PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B22X	-	VRD4B22PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B23X	-	VRD4B23PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B24X	-	VRD4B24PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B25X	-	VRD4B25PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B26X	-	VRD4B26PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B27X	-	VRD4B27PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B28X	-	VRD4B28PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B29X	-	VRD4B29PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B2AX	-	VRD4B2APLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B2BX	-	VRD4B2BPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B2CX	-	VRD4B2CPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B2DX	-	VRD4B2DPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B2EX	-	VRD4B2EPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B2FX	-	VRD4B2FPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4B2GX	-	VRD4B2GPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B2HX	-	VRD4B2HPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B2JX	-	VRD4B2JPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B2KX	-	VRD4B2KPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B30X	-	VRD4B30PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B31X	-	VRD4B31PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B32X	-	VRD4B32PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B33X	-	VRD4B33PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B34X	-	VRD4B34PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B35X	-	VRD4B35PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B36X	-	VRD4B36PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B37X	-	VRD4B37PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B38X	-	VRD4B38PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B39X	-	VRD4B39PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B3AX	-	VRD4B3APLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B3BX	-	VRD4B3BPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B3CX	-	VRD4B3CPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B3DX	-	VRD4B3DPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B3EX	-	VRD4B3EPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B3FX	-	VRD4B3FPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B3GX	-	VRD4B3GPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B3HX	-	VRD4B3HPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B3JX	-	VRD4B3JPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B3KX	-	VRD4B3KPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B40X	-	VRD4B40PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B41X	-	VRD4B41PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B42X	-	VRD4B42PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B43X	-	VRD4B43PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B44X	-	VRD4B44PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B45X	-	VRD4B45PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B46X	-	VRD4B46PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B47X	-	VRD4B47PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B48X	-	VRD4B48PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B49X	-	VRD4B49PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B4AX	-	VRD4B4APLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B4BX	-	VRD4B4BPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B4CX	-	VRD4B4CPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B4DX	-	VRD4B4DPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B4EX	-	VRD4B4EPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B4FX	-	VRD4B4FPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B4GX	-	VRD4B4GPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B4HX	-	VRD4B4HPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B4JX	-	VRD4B4JPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B4KX	-	VRD4B4KPLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4B50X	-	VRD4B50PLX	LVR-IC	LDO, Dual out, Vo1=4.15V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C	-	XC6108C34CGR	Vdet-IC	3.4V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D4C08X	-	VRD4C08NLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C09X	-	VRD4C09NLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C0JX	-	VRD4C0JNLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C0KX	-	VRD4C0KNLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C10X	-	VRD4C10NLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C11X	-	VRD4C11NLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C12X	-	VRD4C12NLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C13X	-	VRD4C13NLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C14X	-	VRD4C14NLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C15X	-	VRD4C15NLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C16X	-	VRD4C16NLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C17X	-	VRD4C17NLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C18X	-	VRD4C18NLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C19X	-	VRD4C19NLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C1AX	-	VRD4C1ANLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C1BX	-	VRD4C1BNLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C1CX	-	VRD4C1CNLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C1DX	-	VRD4C1DNLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C1EX	-	VRD4C1ENLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C1FX	-	VRD4C1FNLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C1GX	-	VRD4C1GNLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C1HX	-	VRD4C1HNLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C1JX	-	VRD4C1JNLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C1KX	-	VRD4C1KPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4C20X	-	VRD4C20PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C21X	-	VRD4C21PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C22X	-	VRD4C22PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C23X	-	VRD4C23PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C24X	-	VRD4C24PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C25X	-	VRD4C25PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C26X	-	VRD4C26PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C27X	-	VRD4C27PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C28X	-	VRD4C28PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C29X	-	VRD4C29PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C2AX	-	VRD4C2APLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C2BX	-	VRD4C2BPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C2CX	-	VRD4C2CPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C2DX	-	VRD4C2DPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C2EX	-	VRD4C2EPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C2FX	-	VRD4C2FPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C2GX	-	VRD4C2GPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C2HX	-	VRD4C2HPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C2JX	-	VRD4C2JPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C2KX	-	VRD4C2KPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C30X	-	VRD4C30PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C31X	-	VRD4C31PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C32X	-	VRD4C32PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C33X	-	VRD4C33PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C34X	-	VRD4C34PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C35X	-	VRD4C35PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C36X	-	VRD4C36PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C37X	-	VRD4C37PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C38X	-	VRD4C38PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C39X	-	VRD4C39PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C3AX	-	VRD4C3APLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C3BX	-	VRD4C3BPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C3CX	-	VRD4C3CPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C3DX	-	VRD4C3DPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C3EX	-	VRD4C3EPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C3FX	-	VRD4C3FPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C3GX	-	VRD4C3GPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C3HX	-	VRD4C3HPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C3JX	-	VRD4C3JPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C3KX	-	VRD4C3KPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C40X	-	VRD4C40PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C41X	-	VRD4C41PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C42X	-	VRD4C42PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C43X	-	VRD4C43PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C44X	-	VRD4C44PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C45X	-	VRD4C45PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C46X	-	VRD4C46PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C47X	-	VRD4C47PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C48X	-	VRD4C48PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C49X	-	VRD4C49PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C4AX	-	VRD4C4APLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C4BX	-	VRD4C4BPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C4CX	-	VRD4C4CPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C4DX	-	VRD4C4DPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C4EX	-	VRD4C4EPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C4FX	-	VRD4C4FPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C4GX	-	VRD4C4GPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C4HX	-	VRD4C4HPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C4JX	-	VRD4C4JPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C4KX	-	VRD4C4KPLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4C50X	-	VRD4C50PLX	LVR-IC	LDO, Dual out, Vo1=4.25V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D	-	XC6108C34DGR	Vdet-IC	3.4V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D4D08X	-	VRD4D08NLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D09X	-	VRD4D09NLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D0JX	-	VRD4D0JNLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D0KX	-	VRD4D0KNLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D10X	-	VRD4D10NLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D11X	-	VRD4D11NLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D12X	-	VRD4D12NLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D13X	-	VRD4D13NLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4D14X	-	VRD4D14NLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D16X	-	VRD4D16NLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D17X	-	VRD4D17NLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D18X	-	VRD4D18NLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D19X	-	VRD4D19NLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D1AX	-	VRD4D1ANLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D1BX	-	VRD4D1BNLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D1CX	-	VRD4D1CNLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D1DX	-	VRD4D1DNLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D1GX	-	VRD4D1GNLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D1HX	-	VRD4D1HNLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D1JX	-	VRD4D1JNLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D1KX	-	VRD4D1KPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D20X	-	VRD4D20PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D21X	-	VRD4D21PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D22X	-	VRD4D22PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D23X	-	VRD4D23PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D24X	-	VRD4D24PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D25X	-	VRD4D25PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D26X	-	VRD4D26PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D27X	-	VRD4D27PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D28X	-	VRD4D28PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D29X	-	VRD4D29PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D2AX	-	VRD4D2APLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D2BX	-	VRD4D2BPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D2CX	-	VRD4D2CPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D2DX	-	VRD4D2DPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D2EX	-	VRD4D2EPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D2FX	-	VRD4D2FPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D2GX	-	VRD4D2GPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D2HX	-	VRD4D2HPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D2JX	-	VRD4D2JPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D2KX	-	VRD4D2KPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D30X	-	VRD4D30PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D31X	-	VRD4D31PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D32X	-	VRD4D32PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D33X	-	VRD4D33PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D34X	-	VRD4D34PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D35X	-	VRD4D35PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D36X	-	VRD4D36PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D37X	-	VRD4D37PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D38X	-	VRD4D38PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D39X	-	VRD4D39PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D3AX	-	VRD4D3APLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D3BX	-	VRD4D3BPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D3CX	-	VRD4D3CPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D3DX	-	VRD4D3DPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D3EX	-	VRD4D3EPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D3FX	-	VRD4D3FPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D3GX	-	VRD4D3GPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D3HX	-	VRD4D3HPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D3JX	-	VRD4D3JPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D3KX	-	VRD4D3KPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D40X	-	VRD4D40PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D41X	-	VRD4D41PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D42X	-	VRD4D42PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D43X	-	VRD4D43PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D44X	-	VRD4D44PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D45X	-	VRD4D45PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D46X	-	VRD4D46PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D47X	-	VRD4D47PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D48X	-	VRD4D48PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D49X	-	VRD4D49PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D4AX	-	VRD4D4APLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D4BX	-	VRD4D4BPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D4CX	-	VRD4D4CPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D4DX	-	VRD4D4DPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D4EX	-	VRD4D4EPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D4FX	-	VRD4D4FPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D4GX	-	VRD4D4GPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4D4HX	-	VRD4D4HPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D4JX	-	VRD4D4JPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D4KX	-	VRD4D4KPLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D50X	-	VRD4D50PLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4D5X	-	VRD4D15NLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4DEX	-	VRD4D1ENLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4DFX	-	VRD4D1FNLX	LVR-IC	LDO, Dual out, Vo1=4.35V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E08X	-	VRD4E08NLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E09X	-	VRD4E09NLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E0JX	-	VRD4E0JNLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E0KX	-	VRD4E0KNLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E10X	-	VRD4E10NLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E11X	-	VRD4E11NLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E12X	-	VRD4E12NLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E13X	-	VRD4E13NLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E14X	-	VRD4E14NLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E15X	-	VRD4E15NLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E16X	-	VRD4E16NLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E17X	-	VRD4E17NLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E18X	-	VRD4E18NLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E19X	-	VRD4E19NLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E1AX	-	VRD4E1ANLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E1BX	-	VRD4E1BNLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E1CX	-	VRD4E1CNLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E1DX	-	VRD4E1DNLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E1EX	-	VRD4E1ENLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E1FX	-	VRD4E1FNLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E1GX	-	VRD4E1GNLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E1HX	-	VRD4E1HNLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E1JX	-	VRD4E1JNLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E1KX	-	VRD4E1KPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E20X	-	VRD4E20PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E21X	-	VRD4E21PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E22X	-	VRD4E22PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E23X	-	VRD4E23PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E24X	-	VRD4E24PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E25X	-	VRD4E25PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E26X	-	VRD4E26PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E27X	-	VRD4E27PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E28X	-	VRD4E28PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E29X	-	VRD4E29PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E2AX	-	VRD4E2APLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E2BX	-	VRD4E2BPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E2CX	-	VRD4E2CPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E2DX	-	VRD4E2DPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E2EX	-	VRD4E2EPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E2FX	-	VRD4E2FPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E2GX	-	VRD4E2GPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E2HX	-	VRD4E2HPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E2JX	-	VRD4E2JPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E2KX	-	VRD4E2KPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E30X	-	VRD4E30PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E31X	-	VRD4E31PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E32X	-	VRD4E32PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E33X	-	VRD4E33PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E34X	-	VRD4E34PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E35X	-	VRD4E35PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E36X	-	VRD4E36PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E37X	-	VRD4E37PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E38X	-	VRD4E38PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E39X	-	VRD4E39PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E3AX	-	VRD4E3APLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E3BX	-	VRD4E3BPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E3CX	-	VRD4E3CPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E3DX	-	VRD4E3DPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E3EX	-	VRD4E3EPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E3FX	-	VRD4E3FPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E3GX	-	VRD4E3GPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E3HX	-	VRD4E3HPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E3JX	-	VRD4E3JPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4E3KX	-	VRD4E3KPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E40X	-	VRD4E40PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E41X	-	VRD4E41PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E42X	-	VRD4E42PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E43X	-	VRD4E43PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E44X	-	VRD4E44PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E45X	-	VRD4E45PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E46X	-	VRD4E46PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E47X	-	VRD4E47PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E48X	-	VRD4E48PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E49X	-	VRD4E49PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E4AX	-	VRD4E4APLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E4BX	-	VRD4E4BPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E4CX	-	VRD4E4CPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E4DX	-	VRD4E4DPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E4EX	-	VRD4E4EPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E4FX	-	VRD4E4FPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E4GX	-	VRD4E4GPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E4HX	-	VRD4E4HPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E4JX	-	VRD4E4JPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E4KX	-	VRD4E4KPLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4E50X	-	VRD4E50PLX	LVR-IC	LDO, Dual out, Vo1=4.45V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F08X	-	VRD4F08NLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F09X	-	VRD4F09NLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F0JX	-	VRD4F0JNLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F0KX	-	VRD4F0KNLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F10X	-	VRD4F10NLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F11X	-	VRD4F11NLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F12X	-	VRD4F12NLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F13X	-	VRD4F13NLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F14X	-	VRD4F14NLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F15X	-	VRD4F15NLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F16X	-	VRD4F16NLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F17X	-	VRD4F17NLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F18X	-	VRD4F18NLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F19X	-	VRD4F19NLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F1AX	-	VRD4F1ANLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F1BX	-	VRD4F1BNLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F1CX	-	VRD4F1CNLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F1DX	-	VRD4F1DNLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F1EX	-	VRD4F1ENLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F1FX	-	VRD4F1FNLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F1GX	-	VRD4F1GNLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F1HX	-	VRD4F1HNLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F1JX	-	VRD4F1JNLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F1KX	-	VRD4F1KPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F20X	-	VRD4F20PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F21X	-	VRD4F21PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F22X	-	VRD4F22PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F23X	-	VRD4F23PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F24X	-	VRD4F24PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F25X	-	VRD4F25PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F26X	-	VRD4F26PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F27X	-	VRD4F27PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F28X	-	VRD4F28PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F29X	-	VRD4F29PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F2AX	-	VRD4F2APLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F2BX	-	VRD4F2BPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F2CX	-	VRD4F2CPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F2DX	-	VRD4F2DPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F2EX	-	VRD4F2EPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F2FX	-	VRD4F2FPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F2GX	-	VRD4F2GPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F2HX	-	VRD4F2HPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F2JX	-	VRD4F2JPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F2KX	-	VRD4F2KPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F30X	-	VRD4F30PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F31X	-	VRD4F31PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F32X	-	VRD4F32PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F33X	-	VRD4F33PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4F34X	-	VRD4F34PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F35X	-	VRD4F35PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F36X	-	VRD4F36PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F37X	-	VRD4F37PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F38X	-	VRD4F38PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F39X	-	VRD4F39PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F3AX	-	VRD4F3APLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F3BX	-	VRD4F3BPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F3CX	-	VRD4F3CPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F3DX	-	VRD4F3DPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F3EX	-	VRD4F3EPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F3FX	-	VRD4F3FPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F3GX	-	VRD4F3GPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F3HX	-	VRD4F3HPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F3JX	-	VRD4F3JPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F3KX	-	VRD4F3KPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F40X	-	VRD4F40PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F41X	-	VRD4F41PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F42X	-	VRD4F42PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F43X	-	VRD4F43PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F44X	-	VRD4F44PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F45X	-	VRD4F45PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F46X	-	VRD4F46PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F47X	-	VRD4F47PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F48X	-	VRD4F48PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F49X	-	VRD4F49PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F4AX	-	VRD4F4APLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F4BX	-	VRD4F4BPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F4CX	-	VRD4F4CPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F4DX	-	VRD4F4DPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F4EX	-	VRD4F4EPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F4FX	-	VRD4F4FPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F4GX	-	VRD4F4GPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F4HX	-	VRD4F4HPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F4JX	-	VRD4F4JPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F4KX	-	VRD4F4KPLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4F50X	-	VRD4F50PLX	LVR-IC	LDO, Dual out, Vo1=4.55V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G08X	-	VRD4G08NLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G09X	-	VRD4G09NLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G0JX	-	VRD4G0JNLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G0KX	-	VRD4G0KNLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G10X	-	VRD4G10NLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G11X	-	VRD4G11NLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G12X	-	VRD4G12NLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G13X	-	VRD4G13NLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G14X	-	VRD4G14NLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G15X	-	VRD4G15NLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G16X	-	VRD4G16NLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G17X	-	VRD4G17NLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G18X	-	VRD4G18NLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G19X	-	VRD4G19NLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G1AX	-	VRD4G1ANLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G1BX	-	VRD4G1BNLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G1CX	-	VRD4G1CNLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G1DX	-	VRD4G1DNLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G1EX	-	VRD4G1ENLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G1FX	-	VRD4G1FNLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G1GX	-	VRD4G1GNLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G1HX	-	VRD4G1HNLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G1JX	-	VRD4G1JNLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G1KX	-	VRD4G1KPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G20X	-	VRD4G20PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G21X	-	VRD4G21PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G22X	-	VRD4G22PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G23X	-	VRD4G23PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G24X	-	VRD4G24PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G25X	-	VRD4G25PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G26X	-	VRD4G26PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G27X	-	VRD4G27PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G28X	-	VRD4G28PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4G29X	-	VRD4G29PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G2AX	-	VRD4G2APLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G2BX	-	VRD4G2BPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G2CX	-	VRD4G2CPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G2DX	-	VRD4G2DPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G2EX	-	VRD4G2EPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G2FX	-	VRD4G2FPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G2GX	-	VRD4G2GPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G2HX	-	VRD4G2HPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G2JX	-	VRD4G2JPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G2KX	-	VRD4G2KPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G30X	-	VRD4G30PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G31X	-	VRD4G31PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G32X	-	VRD4G32PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G33X	-	VRD4G33PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G34X	-	VRD4G34PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G35X	-	VRD4G35PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G36X	-	VRD4G36PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G37X	-	VRD4G37PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G38X	-	VRD4G38PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G39X	-	VRD4G39PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G3AX	-	VRD4G3APLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G3BX	-	VRD4G3BPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G3CX	-	VRD4G3CPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G3DX	-	VRD4G3DPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G3EX	-	VRD4G3EPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G3FX	-	VRD4G3FPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G3GX	-	VRD4G3GPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G3HX	-	VRD4G3HPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G3JX	-	VRD4G3JPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G3KX	-	VRD4G3KPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G40X	-	VRD4G40PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G41X	-	VRD4G41PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G42X	-	VRD4G42PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G43X	-	VRD4G43PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G44X	-	VRD4G44PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G45X	-	VRD4G45PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G46X	-	VRD4G46PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G47X	-	VRD4G47PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G48X	-	VRD4G48PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G49X	-	VRD4G49PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G4AX	-	VRD4G4APLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G4BX	-	VRD4G4BPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G4CX	-	VRD4G4CPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G4DX	-	VRD4G4DPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G4EX	-	VRD4G4EPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G4FX	-	VRD4G4FPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G4GX	-	VRD4G4GPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G4HX	-	VRD4G4HPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G4JX	-	VRD4G4JPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G4KX	-	VRD4G4KPLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4G50X	-	VRD4G50PLX	LVR-IC	LDO, Dual out, Vo1=4.65V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H08X	-	VRD4H08NLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H09X	-	VRD4H09NLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H0JX	-	VRD4H0JNLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H0KX	-	VRD4H0KNLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H10X	-	VRD4H10NLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H11X	-	VRD4H11NLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H12X	-	VRD4H12NLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H13X	-	VRD4H13NLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H14X	-	VRD4H14NLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H15X	-	VRD4H15NLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H16X	-	VRD4H16NLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H17X	-	VRD4H17NLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H18X	-	VRD4H18NLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H19X	-	VRD4H19NLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H1AX	-	VRD4H1ANLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H1BX	-	VRD4H1BNLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H1CX	-	VRD4H1CNLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H1DX	-	VRD4H1DNLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4H1EX	-	VRD4H1ENLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H1FX	-	VRD4H1FNLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H1GX	-	VRD4H1GNLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H1HX	-	VRD4H1HNLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H1JX	-	VRD4H1JNLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H1KX	-	VRD4H1KPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H20X	-	VRD4H20PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H21X	-	VRD4H21PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H22X	-	VRD4H22PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H23X	-	VRD4H23PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H24X	-	VRD4H24PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H25X	-	VRD4H25PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H26X	-	VRD4H26PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H27X	-	VRD4H27PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H28X	-	VRD4H28PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H29X	-	VRD4H29PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H2AX	-	VRD4H2APLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H2BX	-	VRD4H2BPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H2CX	-	VRD4H2CPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H2DX	-	VRD4H2DPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H2EX	-	VRD4H2EPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H2FX	-	VRD4H2FPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H2GX	-	VRD4H2GPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H2HX	-	VRD4H2HPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H2JX	-	VRD4H2JPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H2KX	-	VRD4H2KPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H30X	-	VRD4H30PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H31X	-	VRD4H31PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H32X	-	VRD4H32PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H33X	-	VRD4H33PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H34X	-	VRD4H34PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H35X	-	VRD4H35PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H36X	-	VRD4H36PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H37X	-	VRD4H37PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H38X	-	VRD4H38PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H39X	-	VRD4H39PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H3AX	-	VRD4H3APLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H3BX	-	VRD4H3BPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H3CX	-	VRD4H3CPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H3DX	-	VRD4H3DPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H3EX	-	VRD4H3EPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H3FX	-	VRD4H3FPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H3GX	-	VRD4H3GPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H3HX	-	VRD4H3HPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H3JX	-	VRD4H3JPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H3KX	-	VRD4H3KPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H40X	-	VRD4H40PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H41X	-	VRD4H41PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H42X	-	VRD4H42PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H43X	-	VRD4H43PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H44X	-	VRD4H44PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H45X	-	VRD4H45PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H46X	-	VRD4H46PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H47X	-	VRD4H47PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H48X	-	VRD4H48PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H49X	-	VRD4H49PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H4AX	-	VRD4H4APLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H4BX	-	VRD4H4BPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H4CX	-	VRD4H4CPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H4DX	-	VRD4H4DPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H4EX	-	VRD4H4EPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H4FX	-	VRD4H4FPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H4GX	-	VRD4H4GPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H4HX	-	VRD4H4HPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H4JX	-	VRD4H4JPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H4KX	-	VRD4H4KPLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4H50X	-	VRD4H50PLX	LVR-IC	LDO, Dual out, Vo1=4.75V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J08X	-	VRD4J08NLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J09X	-	VRD4J09NLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J0JX	-	VRD4J0JNLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans




SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4J0KX	-	VRD4J0KNLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J10X	-	VRD4J10NLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J11X	-	VRD4J11NLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J12X	-	VRD4J12NLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J13X	-	VRD4J13NLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J14X	-	VRD4J14NLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J15X	-	VRD4J15NLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J16X	-	VRD4J16NLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J17X	-	VRD4J17NLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J18X	-	VRD4J18NLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J19X	-	VRD4J19NLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J1AX	-	VRD4J1ANLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J1BX	-	VRD4J1BNLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J1CX	-	VRD4J1CNLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J1DX	-	VRD4J1DNLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J1EX	-	VRD4J1ENLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J1FX	-	VRD4J1FNLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J1GX	-	VRD4J1GNLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J1HX	-	VRD4J1HNLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J1JX	-	VRD4J1JNLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J1KX	-	VRD4J1KPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J20X	-	VRD4J20PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J21X	-	VRD4J21PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J22X	-	VRD4J22PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J23X	-	VRD4J23PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J24X	-	VRD4J24PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J25X	-	VRD4J25PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J26X	-	VRD4J26PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J27X	-	VRD4J27PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J28X	-	VRD4J28PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J29X	-	VRD4J29PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J2AX	-	VRD4J2APLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J2BX	-	VRD4J2BPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J2CX	-	VRD4J2CPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J2DX	-	VRD4J2DPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J2EX	-	VRD4J2EPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J2FX	-	VRD4J2FPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J2GX	-	VRD4J2GPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J2HX	-	VRD4J2HPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J2JX	-	VRD4J2JPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J2KX	-	VRD4J2KPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J30X	-	VRD4J30PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J31X	-	VRD4J31PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J32X	-	VRD4J32PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J33X	-	VRD4J33PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J34X	-	VRD4J34PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J35X	-	VRD4J35PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J36X	-	VRD4J36PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J37X	-	VRD4J37PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J38X	-	VRD4J38PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J39X	-	VRD4J39PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J3AX	-	VRD4J3APLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J3BX	-	VRD4J3BPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J3CX	-	VRD4J3CPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J3DX	-	VRD4J3DPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J3EX	-	VRD4J3EPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J3FX	-	VRD4J3FPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J3GX	-	VRD4J3GPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J3HX	-	VRD4J3HPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J3JX	-	VRD4J3JPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J3KX	-	VRD4J3KPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J40X	-	VRD4J40PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J41X	-	VRD4J41PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J42X	-	VRD4J42PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J43X	-	VRD4J43PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J44X	-	VRD4J44PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J45X	-	VRD4J45PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J46X	-	VRD4J46PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J47X	-	VRD4J47PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J48X	-	VRD4J48PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4J49X	-	VRD4J49PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J4AX	-	VRD4J4APLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J4BX	-	VRD4J4BPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J4CX	-	VRD4J4CPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J4DX	-	VRD4J4DPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J4EX	-	VRD4J4EPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J4FX	-	VRD4J4FPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J4GX	-	VRD4J4GPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J4HX	-	VRD4J4HPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J4JX	-	VRD4J4JPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J4KX	-	VRD4J4KPLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4J50X	-	VRD4J50PLX	LVR-IC	LDO, Dual out, Vo1=4.85V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K08X	-	VRD4K08NLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K09X	-	VRD4K09NLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K0JX	-	VRD4K0JNLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K0KX	-	VRD4K0KNLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K10X	-	VRD4K10NLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K11X	-	VRD4K11NLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K12X	-	VRD4K12NLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K13X	-	VRD4K13NLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K14X	-	VRD4K14NLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K15X	-	VRD4K15NLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K16X	-	VRD4K16NLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K17X	-	VRD4K17NLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K18X	-	VRD4K18NLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K19X	-	VRD4K19NLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K1AX	-	VRD4K1ANLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K1BX	-	VRD4K1BNLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K1CX	-	VRD4K1CNLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K1DX	-	VRD4K1DNLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K1EX	-	VRD4K1ENLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K1FX	-	VRD4K1FNLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K1GX	-	VRD4K1GNLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K1HX	-	VRD4K1HNLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K1JX	-	VRD4K1JNLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K1KX	-	VRD4K1KPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K20X	-	VRD4K20PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K21X	-	VRD4K21PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K22X	-	VRD4K22PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K23X	-	VRD4K23PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K24X	-	VRD4K24PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K25X	-	VRD4K25PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K26X	-	VRD4K26PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K27X	-	VRD4K27PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K28X	-	VRD4K28PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K29X	-	VRD4K29PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K2AX	-	VRD4K2APLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K2BX	-	VRD4K2BPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K2CX	-	VRD4K2CPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K2DX	-	VRD4K2DPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K2EX	-	VRD4K2EPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K2FX	-	VRD4K2FPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K2GX	-	VRD4K2GPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K2HX	-	VRD4K2HPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K2JX	-	VRD4K2JPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K2KX	-	VRD4K2KPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K30X	-	VRD4K30PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K31X	-	VRD4K31PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K32X	-	VRD4K32PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K33X	-	VRD4K33PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K34X	-	VRD4K34PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K35X	-	VRD4K35PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K36X	-	VRD4K36PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K37X	-	VRD4K37PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K38X	-	VRD4K38PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K39X	-	VRD4K39PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K3AX	-	VRD4K3APLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K3BX	-	VRD4K3BPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K3CX	-	VRD4K3CPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K3DX	-	VRD4K3DPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D4K3EX	-	VRD4K3EPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K3FX	-	VRD4K3FPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K3GX	-	VRD4K3GPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K3HX	-	VRD4K3HPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K3JX	-	VRD4K3JPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K3KX	-	VRD4K3KPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K40X	-	VRD4K40PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K41X	-	VRD4K41PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K42X	-	VRD4K42PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K43X	-	VRD4K43PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K44X	-	VRD4K44PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K45X	-	VRD4K45PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K46X	-	VRD4K46PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K47X	-	VRD4K47PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K48X	-	VRD4K48PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K49X	-	VRD4K49PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K4AX	-	VRD4K4APLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K4BX	-	VRD4K4BPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K4CX	-	VRD4K4CPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K4DX	-	VRD4K4DPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K4EX	-	VRD4K4EPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K4FX	-	VRD4K4FPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K4GX	-	VRD4K4GPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K4HX	-	VRD4K4HPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K4JX	-	VRD4K4JPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K4KX	-	VRD4K4KPLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4K50X	-	VRD4K50PLX	LVR-IC	LDO, Dual out, Vo1=4.95V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D4W	-	BC847AM	Si-npn	GP, 50V, 100mA, 250mW, B=110..220, >100MHz	SOT-883	22ta	-	2a	PhC
D5	-	BC847BM	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, >100MHz	SOT-883	22ta	-	2a	PhH
D5	-	BZX884-C24	Z-diode	24V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
D5	-	R3118K411A	Vdet-IC	4.1V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
D5	-	RP109L231B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
D5	-	SN74LVC2G132YZP	CMOS-Log	Dual 2-input NOR gates with Schmitt-trigger inputs	BGA-8	50	Log49	9v	Ti
D5	-	XC6221A3617R	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
D5	-	XC6223F15B9R-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
D5	-	XC6GC3502HR	Vdet-IC	3.5V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
D5	-	XC9245A13C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.3V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
D5008X	-	VRD5008NLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=0.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5009X	-	VRD5009NLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=0.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D500JX	-	VRD500JNLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=0.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D500KX	-	VRD500KNLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=0.95V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5010X	-	VRD5010NLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.0V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5011X	-	VRD5011NLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.1V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5012X	-	VRD5012NLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.2V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5013X	-	VRD5013NLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.3V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5014X	-	VRD5014NLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.4V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5015X	-	VRD5015NLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.5V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5016X	-	VRD5016NLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.6V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5017X	-	VRD5017NLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.7V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5018X	-	VRD5018NLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.8V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5019X	-	VRD5019NLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.9V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D501AX	-	VRD501ANLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.05V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D501BX	-	VRD501BNLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.15V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D501CX	-	VRD501CNLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.25V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D501DX	-	VRD501DNLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.35V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D501EX	-	VRD501ENLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.45V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D501FX	-	VRD501FNLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.55V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D501GX	-	VRD501GNLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.65V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D501HX	-	VRD501HNLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.75V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D501JX	-	VRD501JNLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.85V±20mV, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D501KX	-	VRD501KPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=1.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5020X	-	VRD5020PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5021X	-	VRD5021PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5022X	-	VRD5022PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5023X	-	VRD5023PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5024X	-	VRD5024PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5025X	-	VRD5025PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5026X	-	VRD5026PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5027X	-	VRD5027PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5028X	-	VRD5028PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D5029X	-	VRD5029PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D502AX	-	VRD502APLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D502BX	-	VRD502BPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D502CX	-	VRD502CPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D502DX	-	VRD502DPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D502EX	-	VRD502EPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D502FX	-	VRD502FPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D502GX	-	VRD502GPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D502HX	-	VRD502HPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D502JX	-	VRD502JPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D502KX	-	VRD502KPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=2.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5030X	-	VRD5030PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5031X	-	VRD5031PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5032X	-	VRD5032PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5033X	-	VRD5033PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5034X	-	VRD5034PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5035X	-	VRD5035PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5036X	-	VRD5036PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5037X	-	VRD5037PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5038X	-	VRD5038PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5039X	-	VRD5039PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D503AX	-	VRD503APLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D503BX	-	VRD503BPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D503CX	-	VRD503CPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D503DX	-	VRD503DPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D503EX	-	VRD503EPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D503FX	-	VRD503FPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D503GX	-	VRD503GPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D503HX	-	VRD503HPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D503JX	-	VRD503JPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D503KX	-	VRD503KPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=3.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5040X	-	VRD5040PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5041X	-	VRD5041PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.1V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5042X	-	VRD5042PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.2V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5043X	-	VRD5043PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.3V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5044X	-	VRD5044PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.4V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5045X	-	VRD5045PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.5V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5046X	-	VRD5046PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.6V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5047X	-	VRD5047PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.7V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5048X	-	VRD5048PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.8V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5049X	-	VRD5049PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.9V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D504AX	-	VRD504APLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.05V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D504BX	-	VRD504BPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.15V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D504CX	-	VRD504CPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.25V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D504DX	-	VRD504DPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.35V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D504EX	-	VRD504EPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.45V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D504FX	-	VRD504FPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.55V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D504GX	-	VRD504GPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.65V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D504HX	-	VRD504HPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.75V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D504JX	-	VRD504JPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.85V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D504KX	-	VRD504KPLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=4.95V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D5050X	-	VRD5050PLX	LVR-IC	LDO, Dual out, Vo1=5.0V±1%, Vo2=5.0V±1%, 200mA, +CE	LLP-6	74xv	VR19	9r	Ans
D53	-	NX3L1G53GD	CMOS-Log	Single-pole double-throw analog switch	SOT996-2	54	Log58	9z	Nxp
D53	-	NX3L1G53GM	CMOS-Log	Single-pole double-throw analog switch	SOT902-1	51	Log58	9z	Nxp
D53	-	NX3L1G53GT	CMOS-Log	Single-pole double-throw analog switch	SOT833-1	53	Log58	9z	Nxp
D53	-	XC61GC3502HR	Vdet-IC	3.5V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
D5A	-	XC6108C35AGR	Vdet-IC	3.5V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D5B	-	XC6108C35BGR	Vdet-IC	3.5V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D5C	-	XC6108C35CGR	Vdet-IC	3.5V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D5D	-	XC6108C35DGR	Vdet-IC	3.5V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D5W	-	BC847BM	Si-npn	GP, 50V, 100mA, 250mW, B=200..450, >100MHz	SOT-883	22ta	-	2a	PhC
D6	-	BC847CM	Si-npn	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-883	22ta	-	2a	PhH
D6	-	BZX884-C27	Z-diode	27V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
D6	-	R3118K421A	Vdet-IC	4.2V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
D6	-	RP109L241B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
D6	-	XC6221A3717R	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
D6	-	XC6223F16B9R-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
D6	-	XC6GC3602HR	Vdet-IC	3.6V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
D6	-	XC9245A14C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.4V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
D63	-	XC61GC3602HR	Vdet-IC	3.6V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D66	-	NX3L2G66GD	CMOS-Log	2-channel analog switch	SOT996-2	54	Log68	9z	Nxp
D66	-	NX3L2G66GM	CMOS-Log	2-channel analog switch	SOT902-1	51	Log68	9z	Nxp
D66	-	NX3L2G66GT	CMOS-Log	2-channel analog switch	SOT833-1	53	Log68	9z	Nxp
D6A	-	XC6108C36AGR	Vdet-IC	3.6V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D6B	-	XC6108C36BGR	Vdet-IC	3.6V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D6C	-	XC6108C36CGR	Vdet-IC	3.6V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D6D	-	XC6108C36DGR	Vdet-IC	3.6V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D6W	-	BC847CM	Si-npn	GP, 50V, 100mA, 250mW, B=420..800, >100MHz	SOT-883	22ta	-	2a	PhC
D7	-	2PC4617QM	Si-npn	GP, 50V, 100mA, 250mW, >100MHz, B=120..270	SOT-883	22ta	-	2a	Phi
D7	-	BZX884-C30	Z-diode	30V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
D7	-	R3118K431A	Vdet-IC	4.3V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
D7	-	RP109L251B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
D7	-	SN74LVC1G38YEP	CMOS-Log	2-input NAND gate (ODO)	BGA-5	46	Log17	9v	Ti
D7	-	SN74LVC2G38YZP	CMOS-Log	Dual 2-input NAND gate (ODO)	BGA-8	50	Log62	9v	Ti
D7	-	XC6221A3817R	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
D7	-	XC6223F17B9R-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
D7	-	XC6GC3702HR	Vdet-IC	3.7V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
D7	-	XC9245A15C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.5V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
D73	-	XC61GC3702HR	Vdet-IC	3.7V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
D7A	-	XC6108C37AGR	Vdet-IC	3.7V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D7B	-	XC6108C37BGR	Vdet-IC	3.7V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D7C	-	XC6108C37CGR	Vdet-IC	3.7V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D7D	-	XC6108C37DGR	Vdet-IC	3.7V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D8	-	2PC4617RM	Si-npn	GP, 50V, 100mA, 250mW, >100MHz, B=180..390	SOT-883	22ta	-	2a	Phi
D8	-	BZX884-C33	Z-diode	33V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
D8	-	R3118K441A	Vdet-IC	4.4V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
D8	-	RP109L261B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
D8	-	XC6221A3917R	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
D8	-	XC6223F18B9R-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
D8	-	XC6GC3802HR	Vdet-IC	3.8V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
D8	-	XC9245A16C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.6V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
D83	-	XC61GC3802HR	Vdet-IC	3.8V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
D8A	-	XC6108C38AGR	Vdet-IC	3.8V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D8B	-	XC6108C38BGR	Vdet-IC	3.8V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D8C	-	XC6108C38CGR	Vdet-IC	3.8V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D8D	-	XC6108C38DGR	Vdet-IC	3.8V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D9	-	2PC4617SM	Si-npn	GP, 50V, 100mA, 250mW, >100MHz, B=270..560	SOT-883	22ta	-	2a	Phi
D9	-	BZX884-C36	Z-diode	36V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
D9	-	R3118K451A	Vdet-IC	4.5V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
D9	-	RP109L271B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
D9	-	XC6221A4017R	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
D9	-	XC6223F19B9R-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
D9	-	XC6GC3902HR	Vdet-IC	3.9V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
D9	-	XC9245A17C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.7V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
D93	-	XC61GC3902HR	Vdet-IC	3.9V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
D9A	-	XC6108C39AGR	Vdet-IC	3.9V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D9B	-	XC6108C39BGR	Vdet-IC	3.9V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
D9C	-	XC6108C39CGR	Vdet-IC	3.9V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
D9D	-	XC6108C39DGR	Vdet-IC	3.9V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
DA	-	BZX884-C39	Z-diode	39V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
DA	-	EC2D01B	Si-diode	Rectifier, 30V, 70mA, Vf<0.65V(70mA), 3pF	ECSP1006-2T	13d	-	2b	San
DA	-	GDZ5.1	Z-diode	4.84..5.37V, Izt=5.0mA, 100mW	GMD2	13d	-	2w	Rhm
DA	-	R3114K071A	Vdet-IC	0.7V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DA	-	R3134K33EA	Vdet-IC	3.3V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DA	-	SiP21107DVP-12-E3	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, -Error	TSC75-6L	91d4	VR17	9m	Vs
DA	-	XC6223F20B9R-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DA	-	XC9245A18C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.8V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DA08	-	RP504K081A	DC-DC-IC	PWM/VFM st-dwn, 0.8V±18mV, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA09	-	RP504K091A	DC-DC-IC	PWM/VFM st-dwn, 0.9V±18mV, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA10	-	RP504K101A	DC-DC-IC	PWM/VFM st-dwn, 1.0V±18mV, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA11	-	RP504K111A	DC-DC-IC	PWM/VFM st-dwn, 1.1V±18mV, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA12	-	RP504K121A	DC-DC-IC	PWM/VFM st-dwn, 1.2V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA13	-	RP504K131A	DC-DC-IC	PWM/VFM st-dwn, 1.3V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA14	-	RP504K141A	DC-DC-IC	PWM/VFM st-dwn, 1.4V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA15	-	RP504K151A	DC-DC-IC	PWM/VFM st-dwn, 1.5V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA16	-	RP504K161A	DC-DC-IC	PWM/VFM st-dwn, 1.6V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA17	-	RP504K171A	DC-DC-IC	PWM/VFM st-dwn, 1.7V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA18	-	RP504K181A	DC-DC-IC	PWM/VFM st-dwn, 1.8V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA19	-	RP504K191A	DC-DC-IC	PWM/VFM st-dwn, 1.9V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA20	-	RP504K201A	DC-DC-IC	PWM/VFM st-dwn, 2.0V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DA21	-	RP504K211A	DC-DC-IC	PWM/VFM st-dwn, 2.1V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA22	-	RP504K221A	DC-DC-IC	PWM/VFM st-dwn, 2.2V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA23	-	RP504K231A	DC-DC-IC	PWM/VFM st-dwn, 2.3V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA24	-	RP504K241A	DC-DC-IC	PWM/VFM st-dwn, 2.4V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA25	-	RP504K251A	DC-DC-IC	PWM/VFM st-dwn, 2.5V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA26	-	RP504K261A	DC-DC-IC	PWM/VFM st-dwn, 2.6V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA27	-	RP504K271A	DC-DC-IC	PWM/VFM st-dwn, 2.7V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA28	-	RP504K281A	DC-DC-IC	PWM/VFM st-dwn, 2.8V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA29	-	RP504K291A	DC-DC-IC	PWM/VFM st-dwn, 2.9V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA30	-	RP504K301A	DC-DC-IC	PWM/VFM st-dwn, 3.0V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA31	-	RP504K311A	DC-DC-IC	PWM/VFM st-dwn, 3.1V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA32	-	RP504K321A	DC-DC-IC	PWM/VFM st-dwn, 3.2V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA33	-	RP504K331A	DC-DC-IC	PWM/VFM st-dwn, 3.3V±1.5%, 600mA, 2.25MHz, +CE, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DA8	-	XC9236B08C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DA8	-	XC9236B08C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DA8	-	XC9236B08CER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DA9	-	XC9236B09C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DA9	-	XC9236B09C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DA9	-	XC9236B09CER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DAAA	-	ISL9000IRNJZ	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DAAB	-	ISL9012IRKCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/1.8V	DFN-10	37	-	9a	Isl
DAAC	-	ISL9012IRBJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.5V/2.8V	DFN-10	37	-	9a	Isl
DAAD	-	ISL9012IRPLZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.85V/2.9V	DFN-10	37	-	9a	Isl
DAAE	-	ISL9012IRGCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.7V/1.8V	DFN-10	37	-	9a	Isl
DAAF	-	ISL9012IRJCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/1.8V	DFN-10	37	-	9a	Isl
DAAG	-	ISL9012IRJRZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/2.6V	DFN-10	37	-	9a	Isl
DAAH	-	ISL9012IRJMZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/3.0V	DFN-10	37	-	9a	Isl
DAAJ	-	ISL9012IRLLZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.9V/2.9V	DFN-10	37	-	9a	Isl
DAAK	-	ISL9012IRMMZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.0V/3.0V	DFN-10	37	-	9a	Isl
DAAM	-	ISL9011IRNNZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/3.3V	DFN-10	37	VR29	9a	Isl
DAAN	-	ISL9011IRNCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/1.8V	DFN-10	37	VR29	9a	Isl
DAAP	-	ISL9011IRMNZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.0V/3.3V	DFN-10	37	VR29	9a	Isl
DAAS	-	ISL9011IRMGZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.0V/2.7V	DFN-10	37	VR29	9a	Isl
DAAW	-	ISL9011IRKNZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/3.3V	DFN-10	37	VR29	9a	Isl
DAAY	-	ISL9011IRJNZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/3.3V	DFN-10	37	VR29	9a	Isl
DABA	-	ISL9011IRKFZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/2.5V	DFN-10	37	VR29	9a	Isl
DABB	-	ISL9000IRBBZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.5V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DABC	-	ISL9000IRBCZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.8V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DABD	-	ISL9000IRBLZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/2.9V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DABE	-	ISL9000IRGPZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/1.85V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DABF	-	ISL9000IRKNZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/3.3V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DABG	-	ISL9000IRKPZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.85V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DABH	-	ISL9000IRNCZ	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DABJ	-	ISL9000IRPPZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V/1.85V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DACA	-	ISL9011IRJBZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/1.5V	DFN-10	37	VR29	9a	Isl
DADA	-	ISL9011IRFJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.5V/2.8V	DFN-10	37	VR29	9a	Isl
DAEA	-	ISL9011IRKCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/1.8V	DFN-10	37	VR29	9a	Isl
DAFA	-	ISL9011IRBJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.5V/2.8V	DFN-10	37	VR29	9a	Isl
DAGA	-	ISL9011IRPLZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.85V/2.9V	DFN-10	37	VR29	9a	Isl
DAHA	-	ISL9011IRGCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.7V/1.8V	DFN-10	37	VR29	9a	Isl
DAJA	-	ISL9011IRJCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/1.8V	DFN-10	37	VR29	9a	Isl
DAKA	-	ISL9011IRJRZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/2.6V	DFN-10	37	VR29	9a	Isl
DAL	-	XC9236B0LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DAL	-	XC9236B0LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DAL	-	XC9236B0LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DALA	-	ISL9011IRJMZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/3.0V	DFN-10	37	VR29	9a	Isl
DAM	-	XC9236B0MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DAM	-	XC9236B0MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DAM	-	XC9236B0MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DAMA	-	ISL9011IRLLZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.9V/2.9V	DFN-10	37	VR29	9a	Isl
DANA	-	ISL9011IRMMZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.0V/3.0V	DFN-10	37	VR29	9a	Isl
DAPA	-	ISL9012IRNJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/2.8V	DFN-10	37	-	9a	Isl
DAR	-	TPA2039D1YFF	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3.25W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Ti
DARA	-	ISL9012IRNFZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/2.5V	DFN-10	37	-	9a	Isl
DASA	-	ISL9012IRKKZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/2.85V	DFN-10	37	-	9a	Isl
DATA	-	ISL9012IRKJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/2.8V	DFN-10	37	-	9a	Isl
DAVA	-	ISL9012IRKFZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/2.5V	DFN-10	37	-	9a	Isl
DAWA	-	ISL9012IRJBZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/1.5V	DFN-10	37	-	9a	Isl
DAYA	-	ISL9012IRFJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.5V/2.8V	DFN-10	37	-	9a	Isl
DB	-	BZX884-C43	Z-diode	43V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DB	-	R3114K081A	Vdet-IC	0.8V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DB	-	R3134K34EA	Vdet-IC	3.4V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DB	-	XC6223F21B9R-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DB	-	XC9245A19C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.9V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DB0	-	XC9236B10C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DB0	-	XC9236B10C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DB0	-	XC9236B10CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DB08	-	RP504K081D	DC-DC-IC	PWM/VFM st-dwn, 0.8V±18mV, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB09	-	RP504K091D	DC-DC-IC	PWM/VFM st-dwn, 0.9V±18mV, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB1	-	XC9236B11C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DB1	-	XC9236B11C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DB1	-	XC9236B11CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DB10	-	RP504K101D	DC-DC-IC	PWM/VFM st-dwn, 1.0V±18mV, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB11	-	RP504K111D	DC-DC-IC	PWM/VFM st-dwn, 1.1V±18mV, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB12	-	RP504K121D	DC-DC-IC	PWM/VFM st-dwn, 1.2V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB13	-	RP504K131D	DC-DC-IC	PWM/VFM st-dwn, 1.3V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB14	-	RP504K141D	DC-DC-IC	PWM/VFM st-dwn, 1.4V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB15	-	RP504K151D	DC-DC-IC	PWM/VFM st-dwn, 1.5V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB16	-	RP504K161D	DC-DC-IC	PWM/VFM st-dwn, 1.6V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB17	-	RP504K171D	DC-DC-IC	PWM/VFM st-dwn, 1.7V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB18	-	RP504K181D	DC-DC-IC	PWM/VFM st-dwn, 1.8V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB19	-	RP504K191D	DC-DC-IC	PWM/VFM st-dwn, 1.9V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB2	-	XC9236B12C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DB2	-	XC9236B12C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DB2	-	XC9236B12CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DB20	-	RP504K201D	DC-DC-IC	PWM/VFM st-dwn, 2.0V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB21	-	RP504K211D	DC-DC-IC	PWM/VFM st-dwn, 2.1V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB22	-	RP504K221D	DC-DC-IC	PWM/VFM st-dwn, 2.2V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB23	-	RP504K231D	DC-DC-IC	PWM/VFM st-dwn, 2.3V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB24	-	RP504K241D	DC-DC-IC	PWM/VFM st-dwn, 2.4V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB25	-	RP504K251D	DC-DC-IC	PWM/VFM st-dwn, 2.5V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB26	-	RP504K261D	DC-DC-IC	PWM/VFM st-dwn, 2.6V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB27	-	RP504K271D	DC-DC-IC	PWM/VFM st-dwn, 2.7V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB28	-	RP504K281D	DC-DC-IC	PWM/VFM st-dwn, 2.8V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB29	-	RP504K291D	DC-DC-IC	PWM/VFM st-dwn, 2.9V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB3	-	XC9236B13C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DB3	-	XC9236B13C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DB3	-	XC9236B13CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DB30	-	RP504K301D	DC-DC-IC	PWM/VFM st-dwn, 3.0V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB31	-	RP504K311D	DC-DC-IC	PWM/VFM st-dwn, 3.1V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB32	-	RP504K321D	DC-DC-IC	PWM/VFM st-dwn, 3.2V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB33	-	RP504K331D	DC-DC-IC	PWM/VFM st-dwn, 3.3V±1.5%, 600mA, 2.25MHz, +CE CL, Mode	DFN1216-6F	52e5	DC8	9b	Ric
DB4	-	XC9236B14C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DB4	-	XC9236B14C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DB4	-	XC9236B14CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DB5	-	XC9236B15C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DB5	-	XC9236B15C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DB5	-	XC9236B15CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DB6	-	XC9236B16C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DB6	-	XC9236B16C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DB6	-	XC9236B16CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DB7	-	XC9236B17C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DB7	-	XC9236B17C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DB7	-	XC9236B17CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DB8	-	XC9236B18C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DB8	-	XC9236B18C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DB8	-	XC9236B18CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DB9	-	XC9236B19C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DB9	-	XC9236B19C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DB9	-	XC9236B19CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DBA	-	XC9236B1AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DBA	-	XC9236B1AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DBA	-	XC9236B1ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DBAA	-	ISL9000IRNFZ	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.5V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DBB	-	XC9236B1BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DBB	-	XC9236B1BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DBB	-	XC9236B1BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DBBF	-	ISL9011IRBLZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.5V/2.9V	DFN-10	37	VR29	9a	Isl
DBBH	-	ISL9011IRBCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.5V/1.8V	DFN-10	37	VR29	9a	Isl
DBC	-	XC9236B1CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DBC	-	XC9236B1CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DBC	-	XC9236B1CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DBD	-	XC9236B1DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DBD	-	XC9236B1DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DBD	-	XC9236B1DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DBE	-	XC9236B1EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DBE	-	XC9236B1EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DBE	-	XC9236B1ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DBF	-	XC9236B1FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DBF	-	XC9236B1FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DBF	-	XC9236B1FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DBH	-	XC9236B1HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DBH	-	XC9236B1HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DBH	-	XC9236B1HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DBK	-	XC9236B1KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DBK	-	XC9236B1KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DBK	-	XC9236B1KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DBL	-	XC9236B1LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DBL	-	XC9236B1LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DBL	-	XC9236B1LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DBM	-	XC9236B1MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DBM	-	XC9236B1MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DBM	-	XC9236B1MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DBMA	-	ISL9011IRFCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.5V/1.8V	DFN-10	37	VR29	9a	Isl
DBVA	-	ISL9011IRCJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.8V/2.8V	DFN-10	37	VR29	9a	Isl
DC	-	BZX884-C47	Z-diode	47V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
DC	-	R3114K091A	Vdet-IC	0.9V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DC	-	R3134K35EA	Vdet-IC	3.5V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DC	-	XC6223F22B9R-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DC	-	XC9245A20C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.0V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DC0	-	XC9236B20C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DC0	-	XC9236B20C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DC0	-	XC9236B20CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DC1	-	XC9236B21C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DC1	-	XC9236B21C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DC1	-	XC9236B21CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DC2	-	XC9236B22C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DC2	-	XC9236B22C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DC2	-	XC9236B22CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DC3	-	TSDC05IJT	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Ste
DC3	-	XC9236B23C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DC3	-	XC9236B23C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DC3	-	XC9236B23CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DC4	-	XC9236B24C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DC4	-	XC9236B24C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DC4	-	XC9236B24CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DC5	-	XC9236B25C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DC5	-	XC9236B25C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DC5	-	XC9236B25CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DC6	-	XC9236B26C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DC6	-	XC9236B26C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DC6	-	XC9236B26CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DC7	-	XC9236B27C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DC7	-	XC9236B27C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DC7	-	XC9236B27CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DC8	-	XC9236B28C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DC8	-	XC9236B28C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DC8	-	XC9236B28CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DC9	-	XC9236B29C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DC9	-	XC9236B29C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DC9	-	XC9236B29CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DCA	-	XC9236B2AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DCA	-	XC9236B2AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DCA	-	XC9236B2ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DCAA	-	ISL9000IRKKZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.85V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DCB	-	XC9236B2BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DCB	-	XC9236B2BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DCB	-	XC9236B2BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DCBC	-	ISL9012IRMGZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.0V/2.7V	DFN-10	37	-	9a	Isl
DCBD	-	ISL9012IRJNZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/3.3V	DFN-10	37	-	9a	Isl

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DCBK	-	ISL9012IRFDZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.5V/2.0V	DFN-10	37	-	9a	Isl
DCBL	-	ISL9012IRFCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.5V/1.8V	DFN-10	37	-	9a	Isl
DCBN	-	ISL9012IRCJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.8V/2.8V	DFN-10	37	-	9a	Isl
DCBP	-	ISL9012IRCCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.8V/1.8V	DFN-10	37	-	9a	Isl
DCC	-	XC9236B2CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DCC	-	XC9236B2CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DCC	-	XC9236B2CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DCD	-	XC9236B2DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DCD	-	XC9236B2DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DCD	-	XC9236B2DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DCE	-	XC9236B2EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DCE	-	XC9236B2EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DCE	-	XC9236B2ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DCF	-	XC9236B2FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DCF	-	XC9236B2FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DCF	-	XC9236B2FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DCGA	-	ISL9000IRNNZ	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DCH	-	XC9236B2HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DCH	-	XC9236B2HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DCH	-	XC9236B2HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DCHA	-	ISL9000IRMNZ	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.3V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DCJA	-	ISL9000IRMGZ	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.7V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DCK	-	XC9236B2KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DCK	-	XC9236B2KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DCK	-	XC9236B2KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DCKA	-	ISL9000IRJNZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/3.3V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DCL	-	XC9236B2LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DCL	-	XC9236B2LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DCL	-	XC9236B2LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DCLA	-	ISL9000IRFDZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.0V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DCM	-	XC9236B2MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DCM	-	XC9236B2MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DCM	-	XC9236B2MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DCMA	-	ISL9000IRFCZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.8V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DCNA	-	ISL9000IRCJZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/2.8V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DCPA	-	ISL9000IRCCZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.8V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DCRA	-	ISL9011IRFDZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.5V/2.0V	DFN-10	37	VR29	9a	Isl
DCSA	-	ISL9011IRCCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.8V/1.8V	DFN-10	37	VR29	9a	Isl
DCTA	-	ISL9012IRNNZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/3.3V	DFN-10	37	-	9a	Isl
DCYA	-	ISL9012IRMNZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.0V/3.3V	DFN-10	37	-	9a	Isl
DD	-	BZX884-C51	Z-diode	51V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
DD	-	PDTC144WM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/22k	SOT-883	22ta	-	2b	Nxp
DD	-	R3114K101A	Vdet-IC	1.0V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DD	-	R3134K36EA	Vdet-IC	3.6V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DD	-	XC6223F23B9R-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DD	-	XC9245A21C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.1V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DD0	-	XC9236B30C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DD0	-	XC9236B30C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DD0	-	XC9236B30CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DD1	-	XC9236B31C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DD1	-	XC9236B31C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DD1	-	XC9236B31CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DD2	-	XC9236B32C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DD2	-	XC9236B32C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DD2	-	XC9236B32CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DD3	-	XC9236B33C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DD3	-	XC9236B33C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DD3	-	XC9236B33CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DD4	-	XC9236B34C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DD4	-	XC9236B34C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DD4	-	XC9236B34CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DD5	-	XC9236B35C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DD5	-	XC9236B35C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DD5	-	XC9236B35CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DD6	-	XC9236B36C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DD6	-	XC9236B36C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DD6	-	XC9236B36CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DD7	-	XC9236B37C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DD7	-	XC9236B37C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DD7	-	XC9236B37CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DD8	-	XC9236B38C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DD8	-	XC9236B38C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DD8	-	XC9236B38CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DD9	-	XC9236B39C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DD9	-	XC9236B39C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DD9	-	XC9236B39CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DDA	-	XC9236B3AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DDA	-	XC9236B3AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DDA	-	XC9236B3ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DDAA	-	ISL9000IRKJZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.8V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DDB	-	XC9236B3BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DDB	-	XC9236B3BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DDB	-	XC9236B3BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DDC	-	XC9236B3CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DDC	-	XC9236B3CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DDC	-	XC9236B3CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DDD	-	XC9236B3DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DDD	-	XC9236B3DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DDD	-	XC9236B3DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DDDA	-	ISL9011IRPPZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.85V/1.85V	DFN-10	37	VR29	9a	Isl
DDE	-	XC9236B3EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DDE	-	XC9236B3EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DDE	-	XC9236B3ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DDEA	-	ISL9011IRBBZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.5V/1.5V	DFN-10	37	VR29	9a	Isl
DDF	-	XC9236B3FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DDF	-	XC9236B3FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DDF	-	XC9236B3FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DDGA	-	ISL9011IRGPZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.7V/1.85V	DFN-10	37	VR29	9a	Isl
DDH	-	XC9236B3HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DDH	-	XC9236B3HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DDH	-	XC9236B3HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DDHA	-	ISL9011IRKPZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/1.85V	DFN-10	37	VR29	9a	Isl
DDK	-	XC9236B3KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DDK	-	XC9236B3KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DDK	-	XC9236B3KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DDL	-	XC9236B3LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DDL	-	XC9236B3LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DDL	-	XC9236B3LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DDM	-	XC9236B3MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DDM	-	XC9236B3MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DDM	-	XC9236B3MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DE	-	BZX884-C56	Z-diode	56V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
DE	-	PDTA114TM	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=10k	SOT-883	22ta	-	2a	Nxp
DE	-	R3114K111A	Vdet-IC	1.1V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DE	-	R3134K37EA	Vdet-IC	3.7V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DE	-	RT9198-35PQW	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	WDFN-6	49xu	VR4	9a	Rct
DE	-	XC6223F24B9R-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DE	-	XC9245A22C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.2V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DE0	-	XC9236B40C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DE0	-	XC9236B40C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DE0	-	XC9236B40CER-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DEAA	-	ISL9000IRKFZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.5V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DF	-	BZX884-C62	Z-diode	62V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
DF	-	PDTA114YM	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k	SOT-883	22ta	-	2b	Nxp
DF	-	R3114K121A	Vdet-IC	1.2V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DF	-	R3134K38EA	Vdet-IC	3.8V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DF	-	RT9193-35PQW	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
DF	-	XC6223F25B9R-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DF	-	XC9245A23C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.3V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DF00	-	RP132K001E	LVR-IC	LDO, Adj. 0.8..5.5V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF01	-	RP132K121E5	LVR-IC	LDO, 1.25V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF02	-	RP132K181E5	LVR-IC	LDO, 1.85V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF03	-	RP132K281E5	LVR-IC	LDO, 2.8V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF08	-	RP132K081E	LVR-IC	LDO, 0.8V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF09	-	RP132K091E	LVR-IC	LDO, 0.9V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF10	-	RP132K101E	LVR-IC	LDO, 1.0V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF11	-	RP132K111E	LVR-IC	LDO, 1.1V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF12	-	RP132K121E	LVR-IC	LDO, 1.2V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF13	-	RP132K131E	LVR-IC	LDO, 1.3V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF14	-	RP132K141E	LVR-IC	LDO, 1.4V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DF15	-	RP132K151E	LVR-IC	LDO, 1.5V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF16	-	RP132K161E	LVR-IC	LDO, 1.6V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF17	-	RP132K171E	LVR-IC	LDO, 1.7V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF18	-	RP132K181E	LVR-IC	LDO, 1.85V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF19	-	RP132K191E	LVR-IC	LDO, 1.9V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF20	-	RP132K201E	LVR-IC	LDO, 2.0V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF21	-	RP132K211E	LVR-IC	LDO, 2.1V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF22	-	RP132K221E	LVR-IC	LDO, 2.2V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF23	-	RP132K231E	LVR-IC	LDO, 2.3V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF24	-	RP132K241E	LVR-IC	LDO, 2.4V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF25	-	RP132K251E	LVR-IC	LDO, 2.5V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF26	-	RP132K261E	LVR-IC	LDO, 2.6V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF27	-	RP132K271E	LVR-IC	LDO, 2.7V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF28	-	RP132K281E	LVR-IC	LDO, 2.8V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF29	-	RP132K291E	LVR-IC	LDO, 2.9V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF30	-	RP132K301E	LVR-IC	LDO, 3.0V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF31	-	RP132K311E	LVR-IC	LDO, 3.1V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF32	-	RP132K321E	LVR-IC	LDO, 3.2V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF33	-	RP132K331E	LVR-IC	LDO, 3.3V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF34	-	RP132K341E	LVR-IC	LDO, 3.4V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF35	-	RP132K351E	LVR-IC	LDO, 3.5V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF36	-	RP132K361E	LVR-IC	LDO, 3.6V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF37	-	RP132K371E	LVR-IC	LDO, 3.7V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF38	-	RP132K381E	LVR-IC	LDO, 3.8V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF39	-	RP132K391E	LVR-IC	LDO, 3.9V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF40	-	RP132K401E	LVR-IC	LDO, 4.0V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF41	-	RP132K411E	LVR-IC	LDO, 4.1V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF42	-	RP132K421E	LVR-IC	LDO, 4.2V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF43	-	RP132K431E	LVR-IC	LDO, 4.3V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF44	-	RP132K441E	LVR-IC	LDO, 4.4V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF45	-	RP132K451E	LVR-IC	LDO, 4.5V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF46	-	RP132K461E	LVR-IC	LDO, 4.6V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF47	-	RP132K471E	LVR-IC	LDO, 4.7V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF48	-	RP132K481E	LVR-IC	LDO, 4.8V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF49	-	RP132K491E	LVR-IC	LDO, 4.9V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF50	-	RP132K501E	LVR-IC	LDO, 5.0V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF51	-	RP132K511E	LVR-IC	LDO, 5.1V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF52	-	RP132K521E	LVR-IC	LDO, 5.2V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF53	-	RP132K531E	LVR-IC	LDO, 5.3V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF54	-	RP132K541E	LVR-IC	LDO, 5.4V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF55	-	RP132K551E	LVR-IC	LDO, 5.5V±1%, 1A, +CE	DFN1820-6	74e7	VR12	9b	Ric
DF8	-	XC9236B08D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DF8	-	XC9236B08D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DF8	-	XC9236B08DER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DF8	-	XCL206B083AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 0.8V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DF9	-	XC9236B09D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DF9	-	XC9236B09D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DF9	-	XC9236B09DER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DF9	-	XCL206B093AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 0.9V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DFAA	-	ISL9000IRJBZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DFDA	-	ISL9011AIRBBZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.5V/1.5V	DFN-10	37	-	9a	Isl
DFEA	-	ISL9011AIRBCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.5V/1.8V	DFN-10	37	-	9a	Isl
DFFA	-	ISL9011AIRBJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.5V/2.8V	DFN-10	37	-	9a	Isl
DFGA	-	ISL9011AIRBLZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.5V/2.9V	DFN-10	37	-	9a	Isl
DFHA	-	ISL9011AIRCCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.8V/1.8V	DFN-10	37	-	9a	Isl
DFJA	-	ISL9011AIRCJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.8V/2.8V	DFN-10	37	-	9a	Isl
DFKA	-	ISL9011AIRFCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.5V/1.8V	DFN-10	37	-	9a	Isl
DFL	-	XC9236B0LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DFL	-	XC9236B0LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DFL	-	XC9236B0LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DFL	-	XCL206B0L3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 0.85V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DFLA	-	ISL9011AIRFDZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.5V/2.0V	DFN-10	37	-	9a	Isl
DFM	-	XC9236B0MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DFM	-	XC9236B0MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DFM	-	XC9236B0MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DFM	-	XCL206B0M3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 0.95V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DFMA	-	ISL9011AIRFJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.5V/2.8V	DFN-10	37	-	9a	Isl
DFNA	-	ISL9011AIRGCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.7V/1.8V	DFN-10	37	-	9a	Isl
DFPA	-	ISL9011AIRGPZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.7V/1.85V	DFN-10	37	-	9a	Isl
DFRA	-	ISL9011AIRJBZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/1.5V	DFN-10	37	-	9a	Isl



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DFSA	-	ISL9011AIRJCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/1.8V	DFN-10	37	-	9a	Isl
DFTA	-	ISL9011AIRJMZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/3.0V	DFN-10	37	-	9a	Isl
DFVA	-	ISL9011AIRJNZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/3.3V	DFN-10	37	-	9a	Isl
DFYA	-	ISL9011AIRKCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/1.8V	DFN-10	37	VR29	9a	Isl
DG	-	BZX884-C68	Z-diode	68V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
DG	-	PDTA123JM	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k	SOT-883	22ta	-	2b	Nxp
DG	-	R3114K131A	Vdet-IC	1.3V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DG	-	R3134K39EA	Vdet-IC	3.9V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DG	-	SiP21107DVP-18-E3	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, -Error	TSC75-6L	91d4	VR17	9m	Vs
DG00	-	RP132K001F	LVR-IC	LDO, Adj. 0.8..5.5V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG01	-	RP132K121F5	LVR-IC	LDO, 1.25V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG02	-	RP132K181F5	LVR-IC	LDO, 1.85V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG03	-	RP132K281F5	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG08	-	RP132K081F	LVR-IC	LDO, 0.8V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG09	-	RP132K091F	LVR-IC	LDO, 0.9V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG10	-	RP132K101F	LVR-IC	LDO, 1.0V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG11	-	RP132K111F	LVR-IC	LDO, 1.1V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG12	-	RP132K121F	LVR-IC	LDO, 1.2V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG13	-	RP132K131F	LVR-IC	LDO, 1.3V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG14	-	RP132K141F	LVR-IC	LDO, 1.4V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG15	-	RP132K151F	LVR-IC	LDO, 1.5V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG16	-	RP132K161F	LVR-IC	LDO, 1.6V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG17	-	RP132K171F	LVR-IC	LDO, 1.7V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG18	-	RP132K181F	LVR-IC	LDO, 1.85V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG19	-	RP132K191F	LVR-IC	LDO, 1.9V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG20	-	RP132K201F	LVR-IC	LDO, 2.0V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG21	-	RP132K211F	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG22	-	RP132K221F	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG23	-	RP132K231F	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG24	-	RP132K241F	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG25	-	RP132K251F	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG26	-	RP132K261F	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG27	-	RP132K271F	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG28	-	RP132K281F	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG29	-	RP132K291F	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG30	-	RP132K301F	LVR-IC	LDO, 3.0V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG31	-	RP132K311F	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG32	-	RP132K321F	LVR-IC	LDO, 3.2V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG33	-	RP132K331F	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG34	-	RP132K341F	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG35	-	RP132K351F	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG36	-	RP132K361F	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG37	-	RP132K371F	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG38	-	RP132K381F	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG39	-	RP132K391F	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG40	-	RP132K401F	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG41	-	RP132K411F	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG42	-	RP132K421F	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG43	-	RP132K431F	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG44	-	RP132K441F	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG45	-	RP132K451F	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG46	-	RP132K461F	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG47	-	RP132K471F	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG48	-	RP132K481F	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG49	-	RP132K491F	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG50	-	RP132K501F	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG51	-	RP132K511F	LVR-IC	LDO, 5.1V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG52	-	RP132K521F	LVR-IC	LDO, 5.2V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG53	-	RP132K531F	LVR-IC	LDO, 5.3V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG54	-	RP132K541F	LVR-IC	LDO, 5.4V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DG55	-	RP132K551F	LVR-IC	LDO, 5.5V±1%, 1A, +CE, CL	DFN1820-6	74e7	VR12	9b	Ric
DGAA	-	ISL9000IRFJZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.8V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DGBA	-	ISL9011AIRKFZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/2.5V	DFN-10	37	VR29	9a	Isl
DGCA	-	ISL9011AIRKJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/2.8V	DFN-10	37	VR29	9a	Isl
DGDA	-	ISL9011AIRKKZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/2.85V	DFN-10	37	VR29	9a	Isl
DGEA	-	ISL9011AIRKNZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/3.3V	DFN-10	37	VR29	9a	Isl
DGFA	-	ISL9011AIRKPZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/1.85V	DFN-10	37	VR29	9a	Isl
DGGA	-	ISL9011AIRLLZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.9V/2.9V	DFN-10	37	VR29	9a	Isl
DGHA	-	ISL9011AIRMGZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.0V/2.7V	DFN-10	37	VR29	9a	Isl
DGJA	-	ISL9011AIRMMZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.0V/3.0V	DFN-10	37	VR29	9a	Isl

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DGKA	-	ISL9011AIRMNZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.0V/3.3V	DFN-10	37	VR29	9a	Isl
DGLA	-	ISL9011AIRNCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/1.8V	DFN-10	37	VR29	9a	Isl
DGMA	-	ISL9011AIRNFZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/2.5V	DFN-10	37	VR29	9a	Isl
DGNA	-	ISL9011AIRNJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/2.8V	DFN-10	37	VR29	9a	Isl
DGPA	-	ISL9011AIRNNZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/3.3V	DFN-10	37	VR29	9a	Isl
DGRA	-	ISL9011AIRPLZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.85V/2.9V	DFN-10	37	VR29	9a	Isl
DGSA	-	ISL9011AIRPPZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.85V/1.85V	DFN-10	37	VR29	9a	Isl
DH	-	BZX884-C75	Z-diode	75V±5%, If=200mA, 250mW	SOD-882	13d	-	2b	Phi
DH	-	LD6805K/15H	LVR-IC	LDO, 1.5V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
DH	-	PDTA124EM	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k	SOT-883	22ta	-	2b	Nxp
DH	-	R3114K141A	Vdet-IC	1.4V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DH	-	R3134K40EA	Vdet-IC	4.0V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DH	-	XC6223F26B9R-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DH	-	XC9245A24C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.4V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DH0	-	XC9236B10D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DH0	-	XC9236B10D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DH0	-	XC9236B10DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DH0	-	XCL206B103AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.0V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DH1	-	XC9236B11D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DH1	-	XC9236B11D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DH1	-	XC9236B11DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DH1	-	XCL206B113AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.1V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DH2	-	XC9236B12D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DH2	-	XC9236B12D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DH2	-	XC9236B12DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DH2	-	XCL206B123AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.2V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DH3	-	XC9236B13D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DH3	-	XC9236B13D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DH3	-	XC9236B13DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DH3	-	XCL206B133AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.3V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DH4	-	XC9236B14D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DH4	-	XC9236B14D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DH4	-	XC9236B14DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DH4	-	XCL206B143AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.4V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DH5	-	XC9236B15D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DH5	-	XC9236B15D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DH5	-	XC9236B15DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DH5	-	XCL206B153AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.5V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DH6	-	XC9236B16D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DH6	-	XC9236B16D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DH6	-	XC9236B16DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DH6	-	XCL206B163AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.6V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DH7	-	XC9236B17D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DH7	-	XC9236B17D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DH7	-	XC9236B17DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DH7	-	XCL206B173AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.7V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DH8	-	XC9236B18D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DH8	-	XC9236B18D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DH8	-	XC9236B18DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DH8	-	XCL206B183AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.8V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DH9	-	XC9236B19D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DH9	-	XC9236B19D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DH9	-	XC9236B19DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DH9	-	XCL206B193AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.9V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DHA	-	XC9236B1AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DHA	-	XC9236B1AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DHA	-	XC9236B1ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DHA	-	XCL206B1A3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.05V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DHAA	-	ISL9000IRKCZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.8V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DHB	-	XC9236B1BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DHB	-	XC9236B1BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DHB	-	XC9236B1BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DHB	-	XCL206B1B3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.15V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DHC	-	XC9236B1CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DHC	-	XC9236B1CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DHC	-	XC9236B1CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DHC	-	XCL206B1C3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.25V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DHD	-	XC9236B1DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DHD	-	XC9236B1DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DHD	-	XC9236B1DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DHD	-	XCL206B1D3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.35V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DHE	-	XC9236B1ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DHE	-	XC9236B1ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DHE	-	XC9236B1EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DHE	-	XCL206B1E3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.45V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DHF	-	XC9236B1FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DHF	-	XC9236B1FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DHF	-	XC9236B1FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DHF	-	XCL206B1F3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.55V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DHH	-	XC9236B1HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DHH	-	XC9236B1HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DHH	-	XC9236B1HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DHH	-	XCL206B1H3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.65V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DHK	-	XC9236B1KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DHK	-	XC9236B1KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DHK	-	XC9236B1KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DHK	-	XCL206B1K3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.75V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DHL	-	XC9236B1LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DHL	-	XC9236B1LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DHL	-	XC9236B1LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DHL	-	XCL206B1L3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.85V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DHM	-	XC9236B1MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DHM	-	XC9236B1MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DHM	-	XC9236B1MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DHM	-	XCL206B1M3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.95V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DI	-	NX3L1T5157GM	CMOS-Log	Single-pole double-throw analog switch	SOT886	57	Log85	9z	Nxp
DJ	-	PDTA124TM	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=22k	SOT-883	22ta	-	2b	Nxp
DJ	-	R3114K151A	Vdet-IC	1.5V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DJ	-	R3134K41EA	Vdet-IC	4.1V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DJAA	-	ISL9000IRBJZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/2.8V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DJCA	-	ISL9014AIRBBZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.5V/1.5V	DFN-10	37	VR29	9a	Isl
DJDA	-	ISL9014AIRBCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.5V/1.8V	DFN-10	37	VR29	9a	Isl
DJEA	-	ISL9014AIRBJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.5V/2.8V	DFN-10	37	VR29	9a	Isl
DJFA	-	ISL9014AIRBLZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.5V/2.9V	DFN-10	37	VR29	9a	Isl
DJGA	-	ISL9014AIRCCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.8V/1.8V	DFN-10	37	VR29	9a	Isl
DJHA	-	ISL9014AIRCJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.8V/2.8V	DFN-10	37	VR29	9a	Isl
DJJA	-	ISL9014AIRFCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.5V/1.8V	DFN-10	37	VR29	9a	Isl
DJKA	-	ISL9014AIRFDZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.5V/2.0V	DFN-10	37	VR29	9a	Isl
DJLA	-	ISL9014AIRFJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.5V/2.8V	DFN-10	37	VR29	9a	Isl
DJMA	-	ISL9014AIRGCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.7V/1.8V	DFN-10	37	VR29	9a	Isl
DJNA	-	ISL9014AIRGPZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.7V/1.85V	DFN-10	37	VR29	9a	Isl
DJPA	-	ISL9014AIRJBZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/1.5V	DFN-10	37	VR29	9a	Isl
DJRA	-	ISL9014AIRJCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/1.8V	DFN-10	37	VR29	9a	Isl
DJSA	-	ISL9014AIRJMZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/3.0V	DFN-10	37	VR29	9a	Isl
DJTA	-	ISL9014AIRJNZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/3.3V	DFN-10	37	VR29	9a	Isl
DJVA	-	ISL9014AIRJRZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/2.6V	DFN-10	37	VR29	9a	Isl
DJWA	-	ISL9014AIRKCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/1.8V	DFN-10	37	VR29	9a	Isl
DJYA	-	ISL9014AIRKFZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/2.5V	DFN-10	37	VR29	9a	Isl
DK	-	PDTA124XM	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k	SOT-883	22ta	-	2b	Nxp
DK	-	R3114K161A	Vdet-IC	1.6V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DK	-	R3134K42EA	Vdet-IC	4.2V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DK	-	XC6223F27B9R-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DK	-	XC9245A25C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.5V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DK0	-	XC9236B20D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DK0	-	XC9236B20D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DK0	-	XC9236B20DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DK0	-	XCL206B203AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.0V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DK1	-	XC9236B21D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DK1	-	XC9236B21D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DK1	-	XC9236B21DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DK1	-	XCL206B213AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.1V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DK2	-	XC9236B22D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DK2	-	XC9236B22D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DK2	-	XC9236B22DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DK2	-	XCL206B223AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.2V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DK3	-	XC9236B23D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DK3	-	XC9236B23D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DK3	-	XC9236B23DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DK3	-	XCL206B233AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.3V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DK4	-	XC9236B24D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DK4	-	XC9236B24D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DK4	-	XC9236B24DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DK4	-	XCL206B243AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.4V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DK5	-	XC9236B25D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DK5	-	XC9236B25D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DK5	-	XC9236B25DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DK5	-	XCL206B253AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.5V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DK6	-	XC9236B26D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DK6	-	XC9236B26D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DK6	-	XC9236B26DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DK6	-	XCL206B263AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.6V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DK7	-	XC9236B27D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DK7	-	XC9236B27D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DK7	-	XC9236B27DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DK7	-	XCL206B273AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.7V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DK8	-	XC9236B28D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DK8	-	XC9236B28D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DK8	-	XC9236B28DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DK8	-	XCL206B283AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.8V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DK9	-	XC9236B29D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DK9	-	XC9236B29D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DK9	-	XC9236B29DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DK9	-	XCL206B293AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.9V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DKA	-	XC9236B2AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DKA	-	XC9236B2AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DKA	-	XC9236B2ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DKA	-	XCL206B2A3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.05V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DKAA	-	ISL9000IRPLZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.85V/2.9V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DKB	-	XC9236B2BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DKB	-	XC9236B2BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DKB	-	XC9236B2BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DKB	-	XCL206B2B3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.15V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DKBA	-	ISL9014AIRKJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/2.8V	DFN-10	37	VR29	9a	Isl
DKC	-	XC9236B2CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DKC	-	XC9236B2CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DKC	-	XC9236B2CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DKC	-	XCL206B2C3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.25V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DKCA	-	ISL9014AIRKKZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/2.85V	DFN-10	37	VR29	9a	Isl
DKD	-	XC9236B2DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DKD	-	XC9236B2DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DKD	-	XC9236B2DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DKD	-	XCL206B2D3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.35V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DKDA	-	ISL9014AIRKNZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/3.3V	DFN-10	37	VR29	9a	Isl
DKE	-	XC9236B2ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DKE	-	XC9236B2ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DKE	-	XC9236B2EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DKE	-	XCL206B2E3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.45V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DKEA	-	ISL9014AIRKPZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/1.85V	DFN-10	37	VR29	9a	Isl
DKF	-	XC9236B2FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DKF	-	XC9236B2FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DKF	-	XC9236B2FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DKF	-	XCL206B2F3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.55V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DKFA	-	ISL9014AIRLLZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.9V/2.9V	DFN-10	37	VR29	9a	Isl
DKGA	-	ISL9014AIRMGZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.0V/2.7V	DFN-10	37	VR29	9a	Isl
DKH	-	XC9236B2HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DKH	-	XC9236B2HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DKH	-	XC9236B2HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DKH	-	XCL206B2H3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.65V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DKHA	-	ISL9014AIRMMZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.0V/3.0V	DFN-10	37	VR29	9a	Isl
DKJA	-	ISL9014AIRMNZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.0V/3.3V	DFN-10	37	VR29	9a	Isl
DKK	-	XC9236B2KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DKK	-	XC9236B2KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DKK	-	XC9236B2KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DKK	-	XCL206B2K3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.75V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DKKA	-	ISL9014AIRNCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/1.8V	DFN-10	37	VR29	9a	Isl
DKL	-	XC9236B2LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DKL	-	XC9236B2LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DKL	-	XC9236B2LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DKL	-	XCL206B2L3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.85V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DKLA	-	ISL9014AIRNFZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/2.5V	DFN-10	37	VR29	9a	Isl

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DKM	-	XC9236B2MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DKM	-	XC9236B2MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DKM	-	XC9236B2MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DKM	-	XCL206B2M3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.95V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DKMA	-	ISL9014AIRNJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/2.8V	DFN-10	37	VR29	9a	Isl
DKNA	-	ISL9014AIRNNZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/3.3V	DFN-10	37	VR29	9a	Isl
DKPA	-	ISL9014AIRPLZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.85V/2.9V	DFN-10	37	VR29	9a	Isl
DKRA	-	ISL9014AIRPPZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.85V/1.85V	DFN-10	37	VR29	9a	Isl
DKTA	-	ISL9000AMRNCEP	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/1.8V	DFN-10	37	-	9a	Isl
dl	-	BU19UA3WNVX	LVR-IC	LDO, 1.9V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
dL	-	NX3V1G66GM	CMOS-Log	Single-pole single-throw analog switch	SOT886	57	Log16	9z	Nxp
DL	-	NX3L1G66GM	CMOS-Log	Single-pole single-throw analog switch	SOT886	57	Log16	9z	Nxp
DL	-	PDTA143EM	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k	SOT-883	22ta	-	2b	Nxp
DL	-	R3114K171A	Vdet-IC	1.7V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DL	-	R3134K43EA	Vdet-IC	4.3V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DL	-	XC6223F28B9R-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DL	-	XC9245A26C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.6V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DL0	-	XC9236B30D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DL0	-	XC9236B30D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DL0	-	XC9236B30DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DL0	-	XCL206B303AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.0V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DL1	-	XC9236B31D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DL1	-	XC9236B31D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DL1	-	XC9236B31DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DL1	-	XCL206B313AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.1V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DL2	-	XC9236B32D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DL2	-	XC9236B32D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DL2	-	XC9236B32DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DL2	-	XCL206B323AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.2V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DL3	-	XC9236B33D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DL3	-	XC9236B33D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DL3	-	XC9236B33DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DL3	-	XCL206B333AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.3V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DL4	-	XC9236B34D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DL4	-	XC9236B34D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DL4	-	XC9236B34DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DL4	-	XCL206B343AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.4V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DL5	-	XC9236B35D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DL5	-	XC9236B35D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DL5	-	XC9236B35DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DL5	-	XCL206B353AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.5V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DL6	-	XC9236B36D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DL6	-	XC9236B36D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DL6	-	XC9236B36DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DL6	-	XCL206B363AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.6V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DL7	-	XC9236B37D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DL7	-	XC9236B37D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DL7	-	XC9236B37DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DL7	-	XCL206B373AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.7V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DL8	-	XC9236B38D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DL8	-	XC9236B38D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DL8	-	XC9236B38DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DL8	-	XCL206B383AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.8V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DL9	-	XC9236B39D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DL9	-	XC9236B39D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DL9	-	XC9236B39DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DL9	-	XCL206B393AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.9V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DLA	-	XC9236B3AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DLA	-	XC9236B3AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DLA	-	XC9236B3ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DLA	-	XCL206B3A3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.05V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DLAA	-	ISL9000IRGCZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/1.8V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DLB	-	XC9236B3BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DLB	-	XC9236B3BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DLB	-	XC9236B3BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DLB	-	XCL206B3B3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.15V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DLC	-	XC9236B3CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DLC	-	XC9236B3CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DLC	-	XC9236B3CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DLC	-	XCL206B3C3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.25V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DLD	-	XC9236B3DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DLD	-	XC9236B3DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DLD	-	XC9236B3DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DLD	-	XCL206B3D3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.35V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DLE	-	XC9236B3ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DLE	-	XC9236B3ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DLE	-	XC9236B3EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DLE	-	XCL206B3E3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.45V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DLF	-	XC9236B3FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DLF	-	XC9236B3FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DLF	-	XC9236B3FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DLF	-	XCL206B3F3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.55V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DLH	-	XC9236B3HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DLH	-	XC9236B3HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DLH	-	XC9236B3HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DLH	-	XCL206B3H3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.65V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DLK	-	XC9236B3KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DLK	-	XC9236B3KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DLK	-	XC9236B3KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DLK	-	XCL206B3K3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.75V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DLL	-	XC9236B3LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DLL	-	XC9236B3LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DLL	-	XC9236B3LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DLL	-	XCL206B3L3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.85V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DLM	-	XC9236B3MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DLM	-	XC9236B3MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DLM	-	XC9236B3MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DLM	-	XCL206B3M3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.95V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DM	-	PDTC143TM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k	SOT-883	22ta	-	2b	Nxp
DM	-	R3114K181A	Vdet-IC	1.8V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DM	-	R3134K44EA	Vdet-IC	4.4V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DM	-	XC6223F29B9R-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DM	-	XC9245A27C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.7V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DM0	-	XC9236B40D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DM0	-	XC9236B40D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DM0	-	XC9236B40DER-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DM0	-	XCL206B403AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 4.0V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
DMAA	-	ISL9000IRJCZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DN	-	PDTA143XM	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k	SOT-883	22ta	-	2b	Nxp
DN	-	R3114K191A	Vdet-IC	1.9V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DN	-	R3134K45EA	Vdet-IC	4.5V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DN	-	XC6223F30B9R-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DN	-	XC9245A28C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.8V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DN8	-	XC9236G08C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DN8	-	XC9236G08C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DN8	-	XC9236G08CER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DN9	-	XC9236G09C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DN9	-	XC9236G09C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DN9	-	XC9236G09CER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DNAA	-	ISL9000IRJRZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.6V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DNAB	-	ISL78302ARFBZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.5V/1.5V	DFN-10	37	-	9a	Isl
DNAC	-	ISL78302ARBFZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.5V/2.5V	DFN-10	37	-	9a	Isl
DNAD	-	ISL78302ARNBZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/1.5V	DFN-10	37	-	9a	Isl
DNAE	-	ISL78302ARBNZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.5V/3.3V	DFN-10	37	-	9a	Isl
DNAF	-	ISL78302ARNWZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/1.2V	DFN-10	37	-	9a	Isl
DNAG	-	ISL78302ARWCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.2V/1.8V	DFN-10	37	-	9a	Isl
DNAH	-	ISL78302ARFWZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.5V/1.2V	DFN-10	37	-	9a	Isl
DNAJ	-	ISL78302ARCWZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.8V/1.2V	DFN-10	37	-	9a	Isl
DNAK	-	ISL78302AARJCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/1.8V	DFN-10	37	-	9a	Isl
DNAL	-	ISL78302AARMMZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.0V/3.0V	DFN-10	37	-	9a	Isl
DNAM	-	ISL78302AARLLZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.9V/2.9V	DFN-10	37	-	9a	Isl
DNAN	-	ISL78302AARJMZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/3.0V	DFN-10	37	-	9a	Isl
DNAP	-	ISL78302AARJRZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/2.6V	DFN-10	37	-	9a	Isl
DNAR	-	ISL78302AARGCZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.7V/1.8V	DFN-10	37	-	9a	Isl
DNAS	-	ISL78302AARPLZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.85V/2.9V	DFN-10	37	-	9a	Isl
DNAT	-	ISL78302AARBJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.5V/2.8V	DFN-10	37	-	9a	Isl
DNAV	-	ISL78302AR1AZ	LVR-IC	LDO, Dual output, Vout1/Vout2=1.25V/3.3V	DFN-10	37	-	9a	Isl
DNL	-	XC9236G0LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DNL	-	XC9236G0LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DNL	-	XC9236G0LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DNM	-	XC9236G0MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DNM	-	XC9236G0MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DNM	-	XC9236G0MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
dO	-	NX3V1T66GM	CMOS-Log	Single-pole single-throw analog switch	SOT886	57	Log16	9z	Nxp
DO	-	NX3L1T66GM	CMOS-Log	Single-pole single-throw analog switch	SOT886	57	Log16	9z	Nxp
DOO	-	NX3L2T66GM	CMOS-Log	2-channel analog switch	SOT902-1	51	Log68	9z	Nxp
DOO	-	NX3L2T66GT	CMOS-Log	2-channel analog switch	SOT833-1	53	Log68	9z	Nxp
DP	-	LD6805K/15P	LVR-IC	LDO, 1.5V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
DP	-	PDTA143ZM	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k	SOT-883	22ta	-	2b	Nxp
DP	-	R3114K201A	Vdet-IC	2.0V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DP	-	R3134K46EA	Vdet-IC	4.6V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DP	-	SiP21107DVP-25-E3	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, -Error	TSC75-6L	91d4	VR17	9m	Vs
DP	-	XC6223F31B9R-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DP	-	XC9245A29C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.9V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DP0	-	XC9236G10C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DP0	-	XC9236G10C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DP0	-	XC9236G10CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DP1	-	XC9236G11C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DP1	-	XC9236G11C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DP1	-	XC9236G11CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DP2	-	XC9236G12C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DP2	-	XC9236G12C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DP2	-	XC9236G12CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DP3	-	XC9236G13C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DP3	-	XC9236G13C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DP3	-	XC9236G13CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DP4	-	XC9236G14C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DP4	-	XC9236G14C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DP4	-	XC9236G14CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DP5	-	XC9236G15C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DP5	-	XC9236G15C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DP5	-	XC9236G15CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DP6	-	XC9236G16C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DP6	-	XC9236G16C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DP6	-	XC9236G16CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DP7	-	XC9236G17C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DP7	-	XC9236G17C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DP7	-	XC9236G17CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DP8	-	XC9236G18C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DP8	-	XC9236G18C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DP8	-	XC9236G18CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DP9	-	XC9236G19C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DP9	-	XC9236G19C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DP9	-	XC9236G19CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DPA	-	XC9236G1AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DPA	-	XC9236G1AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DPA	-	XC9236G1ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DPAA	-	ISL9000IRJMZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/3.0V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DPB	-	XC9236G1BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DPB	-	XC9236G1BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DPB	-	XC9236G1BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DPC	-	XC9236G1CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DPC	-	XC9236G1CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DPC	-	XC9236G1CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DPD	-	XC9236G1DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DPD	-	XC9236G1DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DPD	-	XC9236G1DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DPE	-	XC9236G1EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DPE	-	XC9236G1EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DPE	-	XC9236G1ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DPF	-	XC9236G1FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DPF	-	XC9236G1FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DPF	-	XC9236G1FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DPH	-	XC9236G1HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DPH	-	XC9236G1HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DPH	-	XC9236G1HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DPK	-	XC9236G1KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DPK	-	XC9236G1KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DPK	-	XC9236G1KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DPL	-	XC9236G1LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DPL	-	XC9236G1LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DPL	-	XC9236G1LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DPM	-	XC9236G1MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DPM	-	XC9236G1MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DPM	-	XC9236G1MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DQ	-	R3114K211A	Vdet-IC	2.1V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DR	-	PDTA144EM	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/47k	SOT-883	22ta	-	2b	Nxp
DR	-	R3114K221A	Vdet-IC	2.2V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DR	-	R3134K47EA	Vdet-IC	4.7V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DR	-	SiP21107DVP-26-E3	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, -Error	TSC75-6L	91d4	VR17	9m	Vs
DR	-	XC6223F32B9R-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DR	-	XC9245A30C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DR0	-	XC9236G20C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DR0	-	XC9236G20C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DR0	-	XC9236G20CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DR1	-	XC9236G21C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DR1	-	XC9236G21C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DR1	-	XC9236G21CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DR2	-	XC9236G22C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DR2	-	XC9236G22C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DR2	-	XC9236G22CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DR3	-	XC9236G23C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DR3	-	XC9236G23C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DR3	-	XC9236G23CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DR4	-	XC9236G24C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DR4	-	XC9236G24C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DR4	-	XC9236G24CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DR5	-	XC9236G25C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DR5	-	XC9236G25C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DR5	-	XC9236G25CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DR6	-	XC9236G26C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DR6	-	XC9236G26C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DR6	-	XC9236G26CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DR7	-	XC9236G27C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DR7	-	XC9236G27C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DR7	-	XC9236G27CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DR8	-	XC9236G28C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DR8	-	XC9236G28C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DR8	-	XC9236G28CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DR9	-	XC9236G29C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DR9	-	XC9236G29C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DR9	-	XC9236G29CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DRA	-	XC9236G2AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DRA	-	XC9236G2AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DRA	-	XC9236G2ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DRAA	-	ISL9000IRLLZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/2.9V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DRB	-	XC9236G2BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DRB	-	XC9236G2BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DRB	-	XC9236G2BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DRC	-	XC9236G2CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DRC	-	XC9236G2CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DRC	-	XC9236G2CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DRD	-	XC9236G2DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DRD	-	XC9236G2DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DRD	-	XC9236G2DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DRE	-	XC9236G2EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DRE	-	XC9236G2EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DRE	-	XC9236G2ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DRF	-	XC9236G2FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DRF	-	XC9236G2FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DRF	-	XC9236G2FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DRH	-	XC9236G2HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DRH	-	XC9236G2HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DRH	-	XC9236G2HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DRK	-	XC9236G2KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DRK	-	XC9236G2KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DRK	-	XC9236G2KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DRL	-	XC9236G2LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DRL	-	XC9236G2LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DRL	-	XC9236G2LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DRM	-	XC9236G2MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DRM	-	XC9236G2MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DRM	-	XC9236G2MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DS	-	PDTC114EM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k	SOT-883	22ta	-	2b	Nxp
DS	-	R3114K231A	Vdet-IC	2.3V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DS	-	R3134K48EA	Vdet-IC	4.8V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DS	-	XC6223F33B9R-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DS	-	XC9245A31C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DS0	-	XC9236G30C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DS0	-	XC9236G30C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DS0	-	XC9236G30CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DS1	-	XC9236G31C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DS1	-	XC9236G31C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DS1	-	XC9236G31CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DS2	-	XC9236G32C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DS2	-	XC9236G32C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DS2	-	XC9236G32CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DS3	-	XC9236G33C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DS3	-	XC9236G33C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DS3	-	XC9236G33CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DS4	-	XC9236G34C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DS4	-	XC9236G34C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DS4	-	XC9236G34CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DS5	-	XC9236G35C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DS5	-	XC9236G35C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DS5	-	XC9236G35CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DS6	-	XC9236G36C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DS6	-	XC9236G36C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DS6	-	XC9236G36CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DS7	-	XC9236G37C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DS7	-	XC9236G37C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DS7	-	XC9236G37CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DS8	-	XC9236G38C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DS8	-	XC9236G38C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DS8	-	XC9236G38CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DS9	-	XC9236G39C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DS9	-	XC9236G39C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DS9	-	XC9236G39CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DSA	-	XC9236G3AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DSA	-	XC9236G3AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DSA	-	XC9236G3ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DSAA	-	ISL9000IRMMZ	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±1.8%, 300mA, +CE, -Err.	DFN-10	37	-	9a	Isl
DSB	-	XC9236G3BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DSB	-	XC9236G3BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DSB	-	XC9236G3BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DSC	-	XC9236G3CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DSC	-	XC9236G3CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DSC	-	XC9236G3CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DSD	-	XC9236G3DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DSD	-	XC9236G3DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DSD	-	XC9236G3DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DSE	-	XC9236G3EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DSE	-	XC9236G3EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DSE	-	XC9236G3ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DSF	-	XC9236G3FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DSF	-	XC9236G3FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DSF	-	XC9236G3FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DSH	-	XC9236G3HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DSH	-	XC9236G3HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DSH	-	XC9236G3HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DSK	-	XC9236G3KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DSK	-	XC9236G3KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DSK	-	XC9236G3KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DSL	-	XC9236G3LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DSL	-	XC9236G3LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DSL	-	XC9236G3LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DSM	-	XC9236G3MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DSM	-	XC9236G3MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DSM	-	XC9236G3MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DT	-	PDTC114TM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=10k	SOT-883	22ta	-	2b	Nxp

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DT	-	R3114K241A	Vdet-IC	2.4V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DT	-	R3134K49EA	Vdet-IC	4.9V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DT	-	SiP21107DVP-28-E3	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, -Error	TSC75-6L	91d4	VR17	9m	Vs
DT	-	XC6223F34B9R-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DT	-	XC9245A32C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DT0	-	XC9236G40C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DT0	-	XC9236G40C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DT0	-	XC9236G40CER-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DTAA	-	ISL9011IRNJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/2.8V	DFN-10	37	VR29	9a	Isl
DU	-	PDTC114YM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k	SOT-883	22ta	-	2b	Nxp
DU	-	R3114K251A	Vdet-IC	2.5V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DU	-	R3134K50EA	Vdet-IC	5.0V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DU	-	XC6223F35B9R-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DU	-	XC9245A33C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DU00	-	RP115L071B5	LVR-IC	LDO, 0.75V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU01	-	RP115L121B5	LVR-IC	LDO, 1.25V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU02	-	RP115L181B5	LVR-IC	LDO, 1.85V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU03	-	RP115L281B5	LVR-IC	LDO, 2.85V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU04	-	RP115L131B5	LVR-IC	LDO, 1.35V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU05	-	RP115L111B5	LVR-IC	LDO, 1.15V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU07	-	RP115L071B	LVR-IC	LDO, 0.7V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU08	-	RP115L081B	LVR-IC	LDO, 0.8V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU09	-	RP115L091B	LVR-IC	LDO, 0.9V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU10	-	RP115L101B	LVR-IC	LDO, 1.0V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU11	-	RP115L111B	LVR-IC	LDO, 1.1V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU12	-	RP115L121B	LVR-IC	LDO, 1.2V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU13	-	RP115L131B	LVR-IC	LDO, 1.3V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU14	-	RP115L141B	LVR-IC	LDO, 1.4V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU15	-	RP115L151B	LVR-IC	LDO, 1.5V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU16	-	RP115L161B	LVR-IC	LDO, 1.6V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU17	-	RP115L171B	LVR-IC	LDO, 1.7V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU18	-	RP115L181B	LVR-IC	LDO, 1.8V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU19	-	RP115L191B	LVR-IC	LDO, 1.9V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU20	-	RP115L201B	LVR-IC	LDO, 2.0V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU21	-	RP115L211B	LVR-IC	LDO, 2.1V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU22	-	RP115L221B	LVR-IC	LDO, 2.2V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU23	-	RP115L231B	LVR-IC	LDO, 2.3V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU24	-	RP115L241B	LVR-IC	LDO, 2.4V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU25	-	RP115L251B	LVR-IC	LDO, 2.5V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU26	-	RP115L261B	LVR-IC	LDO, 2.6V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU27	-	RP115L271B	LVR-IC	LDO, 2.7V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU28	-	RP115L281B	LVR-IC	LDO, 2.8V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU29	-	RP115L291B	LVR-IC	LDO, 2.9V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU30	-	RP115L301B	LVR-IC	LDO, 3.0V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU31	-	RP115L311B	LVR-IC	LDO, 3.1V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU32	-	RP115L321B	LVR-IC	LDO, 3.2V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU33	-	RP115L331B	LVR-IC	LDO, 3.3V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU34	-	RP115L341B	LVR-IC	LDO, 3.4V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU35	-	RP115L351B	LVR-IC	LDO, 3.5V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU36	-	RP115L361B	LVR-IC	LDO, 3.6V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU37	-	RP115L371B	LVR-IC	LDO, 3.7V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU38	-	RP115L381B	LVR-IC	LDO, 3.8V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU39	-	RP115L391B	LVR-IC	LDO, 3.9V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU40	-	RP115L401B	LVR-IC	LDO, 4.0V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU41	-	RP115L411B	LVR-IC	LDO, 4.1V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU42	-	RP115L421B	LVR-IC	LDO, 4.2V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU43	-	RP115L431B	LVR-IC	LDO, 4.3V±1%, 500mA, +CE	DFN1216-8	75s1	VR6b	9b	Ric
DU8	-	XC9236G08D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DU8	-	XC9236G08D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DU8	-	XC9236G08DER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DU9	-	XC9236G09D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DU9	-	XC9236G09D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DU9	-	XC9236G09DER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DUL	-	XC9236G0LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DUL	-	XC9236G0LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DUL	-	XC9236G0LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DUM	-	XC9236G0MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DUM	-	XC9236G0MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DUM	-	XC9236G0MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DV	-	PDTC115EM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k	SOT-883	22ta	-	2b	Nxp

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DV	-	R3114K261A	Vdet-IC	2.6V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DV	-	R3134K23EA2	Vdet-IC	2.32V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DV	-	SiP21107DVP-30-E3	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, -Error	TSC75-6L	91d4	VR17	9m	Vs
DV	-	XC6223F36B9R-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DV	-	XC9245A34C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DV0	-	XC9236G10D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DV0	-	XC9236G10D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DV0	-	XC9236G10DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DV00	-	RP115L071D5	LVR-IC	LDO, 0.75V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV01	-	RP115L121D5	LVR-IC	LDO, 1.25V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV02	-	RP115L181D5	LVR-IC	LDO, 1.85V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV03	-	RP115L281D5	LVR-IC	LDO, 2.85V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV04	-	RP115L131D5	LVR-IC	LDO, 1.35V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV05	-	RP115L111D5	LVR-IC	LDO, 1.1V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV07	-	RP115L071D	LVR-IC	LDO, 0.7V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV08	-	RP115L081D	LVR-IC	LDO, 0.8V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV09	-	RP115L091D	LVR-IC	LDO, 0.9V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV1	-	XC9236G11D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DV1	-	XC9236G11D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DV1	-	XC9236G11DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DV10	-	RP115L101D	LVR-IC	LDO, 1.0V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV11	-	RP115L111D	LVR-IC	LDO, 1.1V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV12	-	RP115L121D	LVR-IC	LDO, 1.2V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV13	-	RP115L131D	LVR-IC	LDO, 1.3V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV14	-	RP115L141D	LVR-IC	LDO, 1.4V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV15	-	RP115L151D	LVR-IC	LDO, 1.5V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV16	-	RP115L161D	LVR-IC	LDO, 1.6V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV17	-	RP115L171D	LVR-IC	LDO, 1.7V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV18	-	RP115L181D	LVR-IC	LDO, 1.8V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV19	-	RP115L191D	LVR-IC	LDO, 2.9V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV2	-	XC9236G12D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DV2	-	XC9236G12D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DV2	-	XC9236G12DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DV20	-	RP115L201D	LVR-IC	LDO, 2.0V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV21	-	RP115L211D	LVR-IC	LDO, 2.1V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV22	-	RP115L221D	LVR-IC	LDO, 2.2V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV23	-	RP115L231D	LVR-IC	LDO, 2.3V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV24	-	RP115L241D	LVR-IC	LDO, 2.4V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV25	-	RP115L251D	LVR-IC	LDO, 2.5V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV26	-	RP115L261D	LVR-IC	LDO, 2.6V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV27	-	RP115L271D	LVR-IC	LDO, 2.7V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV28	-	RP115L281D	LVR-IC	LDO, 2.8V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV29	-	RP115L291D	LVR-IC	LDO, 2.9V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV3	-	XC9236G13D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DV3	-	XC9236G13D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DV3	-	XC9236G13DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DV30	-	RP115L301D	LVR-IC	LDO, 3.0V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV31	-	RP115L311D	LVR-IC	LDO, 3.1V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV32	-	RP115L321D	LVR-IC	LDO, 3.2V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV33	-	RP115L331D	LVR-IC	LDO, 3.3V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV34	-	RP115L341D	LVR-IC	LDO, 3.4V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV35	-	RP115L351D	LVR-IC	LDO, 3.5V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV36	-	RP115L361D	LVR-IC	LDO, 3.6V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV37	-	RP115L371D	LVR-IC	LDO, 3.7V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV38	-	RP115L381D	LVR-IC	LDO, 3.8V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV39	-	RP115L391D	LVR-IC	LDO, 3.9V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV4	-	XC9236G14D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DV4	-	XC9236G14D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DV4	-	XC9236G14DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DV40	-	RP115L401D	LVR-IC	LDO, 4.0V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV41	-	RP115L411D	LVR-IC	LDO, 4.1V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV42	-	RP115L421D	LVR-IC	LDO, 4.2V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV43	-	RP115L431D	LVR-IC	LDO, 4.3V±1%, 500mA, +CE, CL	DFN1216-8	75s1	VR6b	9b	Ric
DV5	-	XC9236G15D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DV5	-	XC9236G15D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DV5	-	XC9236G15DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DV6	-	XC9236G16D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DV6	-	XC9236G16D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DV6	-	XC9236G16DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DV7	-	XC9236G17D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DV7	-	XC9236G17D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DV7	-	XC9236G17DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DV8	-	XC9236G18D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DV8	-	XC9236G18D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DV8	-	XC9236G18DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DV9	-	XC9236G19D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DV9	-	XC9236G19D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DV9	-	XC9236G19DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DVA	-	XC9236G1AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DVA	-	XC9236G1AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DVA	-	XC9236G1ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DVAA	-	ISL9011IRNFZ	LVR-IC	LDO, Dual output, Vout1/Vout2=3.3V/2.5V	DFN-10	37	VR29	9a	Isl
DVB	-	XC9236G1BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DVB	-	XC9236G1BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DVB	-	XC9236G1BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DVC	-	XC9236G1CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DVC	-	XC9236G1CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DVC	-	XC9236G1CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DVD	-	XC9236G1DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DVD	-	XC9236G1DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DVD	-	XC9236G1DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DVE	-	XC9236G1ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DVE	-	XC9236G1ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DVE	-	XC9236G1EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DVF	-	XC9236G1FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DVF	-	XC9236G1FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DVF	-	XC9236G1FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DVH	-	XC9236G1HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DVH	-	XC9236G1HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DVH	-	XC9236G1HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DVK	-	XC9236G1KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DVK	-	XC9236G1KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DVK	-	XC9236G1KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DVL	-	XC9236G1LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DVL	-	XC9236G1LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DVL	-	XC9236G1LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DVM	-	XC9236G1MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DVM	-	XC9236G1MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DVM	-	XC9236G1MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DW	-	R3114K271A	Vdet-IC	2.7V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DW	-	R3134K26EA3	Vdet-IC	2.63V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DWAA	-	ISL9011IRKKZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/2.85V	DFN-10	37	VR29	9a	Isl
DWFA	-	ISL9011AIRJRZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.8V/2.6V	DFN-10	37	-	9a	Isl
DX	-	PDTC124EM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k	SOT-883	22ta	-	2b	Nxp
DX	-	R3114K281A	Vdet-IC	2.8V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DX	-	R3134K29EA3	Vdet-IC	2.93V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DX	-	XC6223F37B9R-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DX	-	XC9245A35C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DX0	-	XC9236G20D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DX0	-	XC9236G20D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DX0	-	XC9236G20DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DX1	-	XC9236G21D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DX1	-	XC9236G21D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DX1	-	XC9236G21DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DX2	-	XC9236G22D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DX2	-	XC9236G22D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DX2	-	XC9236G22DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DX3	-	XC9236G23D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DX3	-	XC9236G23D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DX3	-	XC9236G23DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DX4	-	XC9236G24D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DX4	-	XC9236G24D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DX4	-	XC9236G24DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DX5	-	XC9236G25D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DX5	-	XC9236G25D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DX5	-	XC9236G25DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DX6	-	XC9236G26D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DX6	-	XC9236G26D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DX6	-	XC9236G26DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DX7	-	XC9236G27D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DX7	-	XC9236G27D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DX7	-	XC9236G27DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DX8	-	XC9236G28D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DX8	-	XC9236G28D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DX8	-	XC9236G28DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DX9	-	XC9236G29D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DX9	-	XC9236G29D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DX9	-	XC9236G29DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DXA	-	XC9236G2AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DXA	-	XC9236G2AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DXA	-	XC9236G2ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DXB	-	XC9236G2BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DXB	-	XC9236G2BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DXB	-	XC9236G2BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DXC	-	XC9236G2CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DXC	-	XC9236G2CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DXC	-	XC9236G2CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DXD	-	XC9236G2DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DXD	-	XC9236G2DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DXD	-	XC9236G2DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DXE	-	XC9236G2ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DXE	-	XC9236G2ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DXE	-	XC9236G2EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DXF	-	XC9236G2FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DXF	-	XC9236G2FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DXF	-	XC9236G2FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DXH	-	XC9236G2HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DXH	-	XC9236G2HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DXH	-	XC9236G2HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DXK	-	XC9236G2KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DXK	-	XC9236G2KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DXK	-	XC9236G2KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DXL	-	XC9236G2LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DXL	-	XC9236G2LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DXL	-	XC9236G2LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DXM	-	XC9236G2MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DXM	-	XC9236G2MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DXM	-	XC9236G2MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DY	-	PDTC124TM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=22k	SOT-883	22ta	-	2b	Nxp
DY	-	R3114K291A	Vdet-IC	2.9V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DY	-	R3134K30EA8	Vdet-IC	3.08V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DY	-	SiP21107DVP-33-E3	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, -Error	TSC75-6L	91d4	VR17	9m	Vs
DY	-	XC6223F38B9R-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DY	-	XC9245A36C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DY0	-	XC9236G30D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DY0	-	XC9236G30D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DY0	-	XC9236G30DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DY1	-	XC9236G31D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DY1	-	XC9236G31D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DY1	-	XC9236G31DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DY2	-	XC9236G32D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DY2	-	XC9236G32D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DY2	-	XC9236G32DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DY3	-	XC9236G33D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DY3	-	XC9236G33D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DY3	-	XC9236G33DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DY4	-	XC9236G34D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DY4	-	XC9236G34D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DY4	-	XC9236G34DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DY5	-	XC9236G35D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DY5	-	XC9236G35D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DY5	-	XC9236G35DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DY6	-	XC9236G36D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DY6	-	XC9236G36D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DY6	-	XC9236G36DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DY7	-	XC9236G37D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DY7	-	XC9236G37D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DY7	-	XC9236G37DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DY8	-	XC9236G38D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DY8	-	XC9236G38D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
DY8	-	XC9236G38DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DY9	-	XC9236G39D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DY9	-	XC9236G39D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DY9	-	XC9236G39DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DYA	-	XC9236G3AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DYA	-	XC9236G3AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DYA	-	XC9236G3ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DYAA	-	ISL9011IRKJZ	LVR-IC	LDO, Dual output, Vout1/Vout2=2.85V/2.8V	DFN-10	37	VR29	9a	Isl
DYB	-	XC9236G3BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DYB	-	XC9236G3BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DYB	-	XC9236G3BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DYC	-	XC9236G3CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DYC	-	XC9236G3CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DYC	-	XC9236G3CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DYD	-	XC9236G3DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DYD	-	XC9236G3DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DYD	-	XC9236G3DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DYE	-	XC9236G3ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DYE	-	XC9236G3ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DYE	-	XC9236G3EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DYF	-	XC9236G3FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DYF	-	XC9236G3FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DYF	-	XC9236G3FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DYH	-	XC9236G3HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DYH	-	XC9236G3HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DYH	-	XC9236G3HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DYK	-	XC9236G3KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DYK	-	XC9236G3KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DYK	-	XC9236G3KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DYL	-	XC9236G3LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DYL	-	XC9236G3LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DYL	-	XC9236G3LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DYM	-	XC9236G3MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DYM	-	XC9236G3MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DYM	-	XC9236G3MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
DZ	-	PDTC124XM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k	SOT-883	22ta	-	2b	Nxp
DZ	-	R3114K301A	Vdet-IC	3.0V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
DZ	-	R3134K43EA8	Vdet-IC	4.38V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
DZ	-	XC6223F39B9R-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
DZ	-	XC9245A37C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
DZ0	-	XC9236G40D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
DZ0	-	XC9236G40D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
DZ0	-	XC9236G40DER-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
e	-	BU10UA3WNVX	LVR-IC	LDO, 1.0V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
E*	-	SH4890IBP	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	BGA-8A	39	AFP44	9a	Sit
E0	-	R3118K461A	Vdet-IC	4.6V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
E0	-	RP109L281B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
E0	-	XC6221A31B7R	LVR-IC	LDO, 3.15V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
E0	-	XC6GC4002HR	Vdet-IC	4.0V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
E0	-	XC9245A0LC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.85V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
E00	-	HD74LVC2G00CLE	CMOS-Log	Dual 2-input NAND gates	WCSP-8	50	Log50	9d	Ren
E02	-	RD74LVC2G02WPE	CMOS-Log	Dual 2-input NOR gates	WCSP-8	50	Log53	9d	Ren
E03	-	XC61GC4002HR	Vdet-IC	4.0V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
E04	-	HD74LVC3G04CLE	CMOS-Log	Triple inverters	WCSP-8	50	Log56	9d	Ren
E08	-	RD74LVC2G08WPE	CMOS-Log	Dual 2-input AND gates	WCSP-8	50	Log51	9d	Ren
E0A	-	XC6108C40AGR	Vdet-IC	4.0V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E0B	-	XC6108C40BGR	Vdet-IC	4.0V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E0C	-	XC6108C40CGR	Vdet-IC	4.0V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E0D	-	XC6108C40DGR	Vdet-IC	4.0V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E1	-	PDTC143EM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k	SOT-883	22ta	-	2b	Nxp
E1	-	R3118K471A	Vdet-IC	4.7V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
E1	-	RD74LVC1G00WPE	CMOS-Log	2-input NAND gate	WCSP-5	46	Log1	9d	Ren
E1	-	RP109L291B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
E1	-	XC6221A32B7R	LVR-IC	LDO, 3.25V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
E1	-	XC6GC4102HR	Vdet-IC	4.1V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
E1	-	XC9245A0MC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.95V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
E125	-	R1182K121B5	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E12B	-	R1182K121B	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E13	-	XC61GC4102HR	Vdet-IC	4.1V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
E13B	-	R1182K131B	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E14B	-	R1182K141B	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E15B	-	R1182K151B	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E16B	-	R1182K161B	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E17B	-	R1182K171B	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E185	-	R1182K181B5	LVR-IC	LDO, 1.85V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E18B	-	R1182K181B	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E19B	-	R1182K191B	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E1A	-	XC6108C41AGR	Vdet-IC	4.1V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E1B	-	XC6108C41BGR	Vdet-IC	4.1V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E1C	-	XC6108C41CGR	Vdet-IC	4.1V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E1D	-	XC6108C41DGR	Vdet-IC	4.1V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E2	-	HD74LVC1G08CLE	CMOS-Log	2-input AND gate	WCSP-5	46	Log3	9d	Ren
E2	-	HD74LVC1G08CPE	CMOS-Log	2-input AND gate	WCSP-5	46	Log3	9d	Ren
E2	-	PDTC143XM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k	SOT-883	22ta	-	2b	Nxp
E2	-	R3118K481A	Vdet-IC	4.8V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
E2	-	RD74LVC1G08WPE	CMOS-Log	2-input AND gate	WCSP-5	46	Log3	9d	Ren
E2	-	RP109L301B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
E2	-	XC6221A33B7R	LVR-IC	LDO, 3.35V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
E2	-	XC6223G12B9R-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
E2	-	XC6GC4202HR	Vdet-IC	4.2V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
E2	-	XC9245A1AC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.05V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
E20B	-	R1182K201B	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E21B	-	R1182K211B	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E22B	-	R1182K221B	LVR-IC	LDO, 2.2V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E23	-	XC61GC4202HR	Vdet-IC	4.2V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
E23B	-	R1182K231B	LVR-IC	LDO, 2.3V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E24B	-	R1182K241B	LVR-IC	LDO, 2.4V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E25	-	RD74LVC2G125WPE	CMOS-Log	Dual bus buffer with 3-state output	WCSP-8	50	Log54	9d	Ren
E25B	-	R1182K251B	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E26	-	HD74LVC2G126CLE	CMOS-Log	Dual bus buffer with 3-state output	WCSP-8	50	Log55	9d	Ren
E26B	-	R1182K261B	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E27B	-	R1182K271B	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E285	-	R1182K281B5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E28B	-	R1182K281B	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E29B	-	R1182K291B	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E2A	-	XC6108C42AGR	Vdet-IC	4.2V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E2B	-	XC6108C42BGR	Vdet-IC	4.2V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E2C	-	XC6108C42CGR	Vdet-IC	4.2V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E2D	-	XC6108C42DGR	Vdet-IC	4.2V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
e3	-	NX3V1T384GM	CMOS-Log	Single-pole single-throw analog switch	SOT886	57	Log86	9z	Nxp
E3	-	HD74LVC1G02CLE	CMOS-Log	2-input NOR gate	WCSP-5	46	Log2	9d	Ren
E3	-	HD74LVC1G02CPE	CMOS-Log	2-input NOR gate	WCSP-5	46	Log2	9d	Ren
E3	-	PDTC143ZM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k	SOT-883	22ta	-	2b	Nxp
E3	-	R3118K491A	Vdet-IC	4.9V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
E3	-	RD74LVC1G02WPE	CMOS-Log	2-input NOR gate	WCSP-5	46	Log2	9d	Ren
E3	-	RP109L311B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
E3	-	XC6221A34B7R	LVR-IC	LDO, 3.45V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
E3	-	XC6223G13B9R-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
E3	-	XC6GC4302HR	Vdet-IC	4.3V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
E3	-	XC9245A1BC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.15V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
E30B	-	R1182K301B	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E31B	-	R1182K311B	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E32	-	RD74LVC2G32WPE	CMOS-Log	Dual 2-input OR gates	WCSP-8	50	Log52	9d	Ren
E32B	-	R1182K321B	LVR-IC	LDO, 3.2V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E33	-	XC61GC4302HR	Vdet-IC	4.3V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
E33B	-	R1182K331B	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E34B	-	R1182K341B	LVR-IC	LDO, 3.4V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E35B	-	R1182K351B	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E36B	-	R1182K361B	LVR-IC	LDO, 3.6V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E37B	-	R1182K371B	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E38B	-	R1182K381B	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E39B	-	R1182K391B	LVR-IC	LDO, 3.9V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E3A	-	XC6108C43AGR	Vdet-IC	4.3V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E3B	-	XC6108C43BGR	Vdet-IC	4.3V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E3C	-	XC6108C43CGR	Vdet-IC	4.3V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E3D	-	XC6108C43DGR	Vdet-IC	4.3V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E4	-	HD74LVC1G32CLE	CMOS-Log	2-input OR gate	WCSP-5	46	Log4	9d	Ren
E4	-	HD74LVC1G32CPE	CMOS-Log	2-input OR gate	WCSP-5	46	Log4	9d	Ren
E4	-	LM4664ITL	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 1.1W(5V/8Ω), shutdown	BGA-9	39	AFP52	9a	Nsc
E4	-	PDTC144TM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=47k	SOT-883	22ta	-	2b	Nxp

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E4	-	R3118K501A	Vdet-IC	5.0V±1.5%, -Reset ODO, Sense	DFN1212-6	52z3	VD14	9a	Ric
E4	-	RD74LVC1G32WPE	CMOS-Log	2-input OR gate	WCSP-5	46	Log4	9d	Ren
E4	-	RP109L321B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
E4	-	XC6221A35B7R	LVR-IC	LDO, 3.55V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
E4	-	XC6223G14B9R-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
E4	-	XC6GC4402HR	Vdet-IC	4.4V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
E4	-	XC9245A1CC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.25V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
E40B	-	R1182K401B	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	PLP1616-6	66ys	VR4	9b	Ric
E43	-	XC61GC4402HR	Vdet-IC	4.4V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
E4A	-	XC6108C44AGR	Vdet-IC	4.4V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E4B	-	XC6108C44BGR	Vdet-IC	4.4V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E4C	-	XC6108C44CGR	Vdet-IC	4.4V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E4D	-	XC6108C44DGR	Vdet-IC	4.4V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E5	-	HD74LVC1G04CLE	CMOS-Log	Inverter	WCSP-5	46	Log6	9d	Ren
E5	-	HD74LVC1G04CPE	CMOS-Log	Inverter	WCSP-5	46	Log6	9d	Ren
E5	-	PDTA114EM	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k	SOT-883	22ta	-	2b	Nxp
E5	-	RD74LVC1G04WPE	CMOS-Log	Inverter	WCSP-5	46	Log6	9d	Ren
E5	-	RP109L331B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
E5	-	RT9013-1BPQW	LVR-IC	LDO, 1.25V±2%, 500mA, +CE	WDFN-6	49xu	VR4	9a	Rct
E5	-	XC6221A36B7R	LVR-IC	LDO, 3.65V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
E5	-	XC6223G15B9R-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
E5	-	XC6GC4502HR	Vdet-IC	4.5V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
E5	-	XC9245A1DC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.35V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
E53	-	HD74LVC2G53CLE	CMOS-Log	2-channel analog multiplexer/demultiplexer	WCSP-8	50	Log58	9d	Ren
E53	-	XC61GC4502HR	Vdet-IC	4.5V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
E5A	-	XC6108C45AGR	Vdet-IC	4.5V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E5B	-	XC6108C45BGR	Vdet-IC	4.5V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E5C	-	XC6108C45CGR	Vdet-IC	4.5V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E5D	-	XC6108C45DGR	Vdet-IC	4.5V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E6	-	LM4670ITL	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 3W(5V/3Ω), shutdown	BGA-9	39	AFP45	9a	Nsc
E6	-	PDTA143TM	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k	SOT-883	22ta	-	2b	Nxp
E6	-	RP109L341B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
E6	-	XC6221A37B7R	LVR-IC	LDO, 3.75V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
E6	-	XC6223G16B9R-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
E6	-	XC6GC4602HR	Vdet-IC	4.6V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
E6	-	XC9245A1EC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.45V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
E63	-	XC61GC4602HR	Vdet-IC	4.6V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
E66	-	HD74LVC2G66CLE	CMOS-Log	2-channel analog switch	WCSP-8	50	Log68	9d	Ren
E6A	-	XC6108C46AGR	Vdet-IC	4.6V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E6B	-	XC6108C46BGR	Vdet-IC	4.6V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E6C	-	XC6108C46CGR	Vdet-IC	4.6V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E6D	-	XC6108C46DGR	Vdet-IC	4.6V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E7	-	LM4671ITL	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.5W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Nsc
E7	-	PDTC144EM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/47k	SOT-883	22ta	-	2b	Nxp
E7	-	RP109L351B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
E7	-	XC6221A38B7R	LVR-IC	LDO, 3.85V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
E7	-	XC6223G17B9R-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
E7	-	XC6GC4702HR	Vdet-IC	4.7V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
E7	-	XC9245A1FC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.55V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
E73	-	XC61GC4702HR	Vdet-IC	4.7V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
E7A	-	XC6108C47AGR	Vdet-IC	4.7V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E7B	-	XC6108C47BGR	Vdet-IC	4.7V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E7C	-	XC6108C47CGR	Vdet-IC	4.7V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E7D	-	XC6108C47DGR	Vdet-IC	4.7V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E8	-	RD74LVC1G86WPE	CMOS-Log	2-input EXCLUSIVE-OR gate	WCSP-5	46	Log5	9d	Ren
E8	-	RP109L361B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
E8	-	XC6221A39B7R	LVR-IC	LDO, 3.95V±1%, 200mA, +CE	USPN-4	58vm	VR4	9a	Tor
E8	-	XC6223G18B9R-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
E8	-	XC6GC4802HR	Vdet-IC	4.8V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
E8	-	XC9245A1HC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.65V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
E83	-	XC61GC4802HR	Vdet-IC	4.8V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
E8A	-	XC6108C48AGR	Vdet-IC	4.8V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E8B	-	XC6108C48BGR	Vdet-IC	4.8V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E8C	-	XC6108C48CGR	Vdet-IC	4.8V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E8D	-	XC6108C48DGR	Vdet-IC	4.8V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E9	-	HD74LVC1G66CLE	CMOS-Log	Single-pole single-throw analog switch	WCSP-5	46	Log16	9d	Ren
E9	-	HD74LVC1G66CPE	CMOS-Log	Single-pole single-throw analog switch	WCSP-5	46	Log16	9d	Ren
E9	-	PDTA144VM	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/10k	SOT-883	22ta	-	2b	Nxp
E9	-	RP109L121B5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
E9	-	XC6223G19B9R-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E9	-	XC6GC4902HR	Vdet-IC	4.9V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
E9	-	XC9245A1KC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.75V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
E93	-	XC61GC4902HR	Vdet-IC	4.9V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
E9A	-	XC6108C49AGR	Vdet-IC	4.9V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E9B	-	XC6108C49BGR	Vdet-IC	4.9V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
E9C	-	XC6108C49CGR	Vdet-IC	4.9V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
E9D	-	XC6108C49DGR	Vdet-IC	4.9V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
EA	-	GDZ5.6	Z-diode	5.31..5.92V, Izt=5.0mA, 100mW	GMD2	13d	-	2w	Rhm
EA	-	R3114K311A	Vdet-IC	3.1V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
EA	-	R3134K46EA3	Vdet-IC	4.63V±1.8%, -Reset ODO, -MR	DFN1212-6	52z6	VD4	9a	Ric
EA	-	RD74LVC1G14WPE	CMOS-Log	Inverting Schmitt-trigger	WCSP-5	46	Log7	9d	Ren
EA	-	XC6223G20B9R-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
EA	-	XC9245A1LC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.85V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
EA096	mk	XC9217A096D	DC-DC-IC	PWM-PWM/PFM st-dwn, 0.9V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA09C	mk	XC9217A09CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 0.9V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA106	mk	XC9217A106D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.0V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA10C	mk	XC9217A10CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.0V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA116	mk	XC9217A116D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.1V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA11C	mk	XC9217A11CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.1V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA126	mk	XC9217A126D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA12C	mk	XC9217A12CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA136	mk	XC9217A136D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.3V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA13C	mk	XC9217A13CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.3V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA146	mk	XC9217A146D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.4V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA14C	mk	XC9217A14CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.4V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA156	mk	XC9217A156D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.5V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA15C	mk	XC9217A15CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.5V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA166	mk	XC9217A166D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.6V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA16C	mk	XC9217A16CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.6V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA176	mk	XC9217A176D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.7V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA17C	mk	XC9217A17CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.7V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA186	mk	XC9217A186D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.8V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA18C	mk	XC9217A18CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.8V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA196	mk	XC9217A196D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.9V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA19C	mk	XC9217A19CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.9V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA206	mk	XC9217A206D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.0V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA20C	mk	XC9217A20CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.0V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA216	mk	XC9217A216D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.1V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA21C	mk	XC9217A21CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.1V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA226	mk	XC9217A226D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.2V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA22C	mk	XC9217A22CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.2V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA236	mk	XC9217A236D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.3V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA23C	mk	XC9217A23CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.3V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA246	mk	XC9217A246D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.4V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA24C	mk	XC9217A24CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.4V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA256	mk	XC9217A256D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.5V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA25C	mk	XC9217A25CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.5V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA266	mk	XC9217A266D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.6V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA26C	mk	XC9217A26CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.6V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA276	mk	XC9217A276D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.7V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA27C	mk	XC9217A27CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.7V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA286	mk	XC9217A286D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.8V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA28C	mk	XC9217A28CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.8V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA296	mk	XC9217A296D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.9V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA29C	mk	XC9217A29CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.9V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA306	mk	XC9217A306D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.0V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA30C	mk	XC9217A30CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.0V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA316	mk	XC9217A316D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.1V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA31C	mk	XC9217A31CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.1V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA326	mk	XC9217A326D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.2V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA32C	mk	XC9217A32CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.2V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA336	mk	XC9217A336D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.3V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA33C	mk	XC9217A33CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.3V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA346	mk	XC9217A346D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.4V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA34C	mk	XC9217A34CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.4V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA356	mk	XC9217A356D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.5V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA35C	mk	XC9217A35CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.5V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA366	mk	XC9217A366D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.6V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA36C	mk	XC9217A36CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.6V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA376	mk	XC9217A376D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.7V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EA37C	mk	XC9217A37CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.7V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA386	mk	XC9217A386D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.8V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA38C	mk	XC9217A38CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.8V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA396	mk	XC9217A396D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.9V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA39C	mk	XC9217A39CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.9V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA406	mk	XC9217A406D	DC-DC-IC	PWM-PWM/PFM st-dwn, 4.0V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA40C	mk	XC9217A40CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 4.0V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
EA8	-	XC9237B08C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EA8	-	XC9237B08C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EA8	-	XC9237B08CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EA9	-	XC9237B09C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EA9	-	XC9237B09C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EA9	-	XC9237B09CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EAL	-	XC9237B0LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EAL	-	XC9237B0LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EAL	-	XC9237B0LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EAM	-	XC9237B0MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EAM	-	XC9237B0MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EAM	-	XC9237B0MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EB	-	PDTA115TM	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=100k	SOT-883	22ta	-	2a	Nxp
EB	-	R3114K321A	Vdet-IC	3.2V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
EB	-	RD74LVC1G125WPE	CMOS-Log	Bus buffer gate with 3-state output	WCSP-5	46	Log14	9d	Ren
EB	-	XC6223G21B9R-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
EB	-	XC9245A1MC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.95V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
EB0	-	XC9237B10C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EB0	-	XC9237B10C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EB0	-	XC9237B10CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EB096	mk	XC9217B096D	DC-DC-IC	PWM-PWM/PFM st-dwn, 0.9V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB09C	mk	XC9217B09CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 0.9V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB1	-	XC9237B11C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EB1	-	XC9237B11C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EB1	-	XC9237B11CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EB106	mk	XC9217B106D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.0V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB10C	mk	XC9217B10CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.0V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB116	mk	XC9217B116D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.1V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB11C	mk	XC9217B11CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.1V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB126	mk	XC9217B126D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB12C	mk	XC9217B12CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB136	mk	XC9217B136D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.3V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB13C	mk	XC9217B13CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.3V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB146	mk	XC9217B146D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.4V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB14C	mk	XC9217B14CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.4V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB156	mk	XC9217B156D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.5V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB15C	mk	XC9217B15CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.5V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB166	mk	XC9217B166D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.6V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB16C	mk	XC9217B16CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.6V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB176	mk	XC9217B176D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.7V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB17C	mk	XC9217B17CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.7V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB186	mk	XC9217B186D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.8V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB18C	mk	XC9217B18CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.8V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB196	mk	XC9217B196D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.9V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB19C	mk	XC9217B19CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.9V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB2	-	XC9237B12C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EB2	-	XC9237B12C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EB2	-	XC9237B12CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EB206	mk	XC9217B206D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.0V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB20C	mk	XC9217B20CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.0V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB216	mk	XC9217B216D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.1V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB21C	mk	XC9217B21CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.1V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB226	mk	XC9217B226D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.2V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB22C	mk	XC9217B22CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.2V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB236	mk	XC9217B236D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.3V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB23C	mk	XC9217B23CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.3V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB246	mk	XC9217B246D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.4V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB24C	mk	XC9217B24CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.4V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB256	mk	XC9217B256D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.5V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB25C	mk	XC9217B25CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.5V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB266	mk	XC9217B266D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.6V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB26C	mk	XC9217B26CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.6V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB276	mk	XC9217B276D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.7V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EB27C	mk	XC9217B27CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.7V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB286	mk	XC9217B286D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.8V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB28C	mk	XC9217B28CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.8V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB296	mk	XC9217B296D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.9V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB29C	mk	XC9217B29CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.9V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB3	-	XC9237B13C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EB3	-	XC9237B13C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EB3	-	XC9237B13CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EB306	mk	XC9217B306D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.0V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB30C	mk	XC9217B30CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.0V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB316	mk	XC9217B316D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.1V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB31C	mk	XC9217B31CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.1V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB326	mk	XC9217B326D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.2V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB32C	mk	XC9217B32CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.2V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB336	mk	XC9217B336D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.3V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB33C	mk	XC9217B33CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.3V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB346	mk	XC9217B346D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.4V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB34C	mk	XC9217B34CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.4V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB356	mk	XC9217B356D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.5V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB35C	mk	XC9217B35CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.5V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB366	mk	XC9217B366D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.6V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB36C	mk	XC9217B36CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.6V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB376	mk	XC9217B376D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.7V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB37C	mk	XC9217B37CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.7V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB386	mk	XC9217B386D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.8V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB38C	mk	XC9217B38CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.8V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB396	mk	XC9217B396D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.9V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB39C	mk	XC9217B39CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.9V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB4	-	XC9237B14C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EB4	-	XC9237B14C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EB4	-	XC9237B14CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EB406	mk	XC9217B406D	DC-DC-IC	PWM-PWM/PFM st-dwn, 4.0V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB40C	mk	XC9217B40CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 4.0V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
EB5	-	XC9237B15C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EB5	-	XC9237B15C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EB5	-	XC9237B15CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EB6	-	XC9237B16C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EB6	-	XC9237B16C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EB6	-	XC9237B16CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EB7	-	XC9237B17C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EB7	-	XC9237B17C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EB7	-	XC9237B17CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EB8	-	XC9237B18C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EB8	-	XC9237B18C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EB8	-	XC9237B18CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EB9	-	XC9237B19C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EB9	-	XC9237B19C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EB9	-	XC9237B19CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EBA	-	XC9237B1AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EBA	-	XC9237B1AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EBA	-	XC9237B1ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EBB	-	XC9237B1BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EBB	-	XC9237B1BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EBB	-	XC9237B1BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EBC	-	XC9237B1CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EBC	-	XC9237B1CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EBC	-	XC9237B1CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EBD	-	XC9237B1DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EBD	-	XC9237B1DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EBD	-	XC9237B1DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EBE	-	XC9237B1EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EBE	-	XC9237B1EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EBE	-	XC9237B1ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EBF	-	XC9237B1FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EBF	-	XC9237B1FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EBF	-	XC9237B1FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EBH	-	XC9237B1HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EBH	-	XC9237B1HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EBH	-	XC9237B1HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EBK	-	XC9237B1KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EBK	-	XC9237B1KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EBK	-	XC9237B1KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EBL	-	XC9237B1LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EBL	-	XC9237B1LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EBL	-	XC9237B1LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EBM	-	XC9237B1MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EBM	-	XC9237B1MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EBM	-	XC9237B1MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EC	-	R3114K331A	Vdet-IC	3.3V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
EC	-	RD74LVC1G126WPE	CMOS-Log	Bus buffer gate with 3-state output	WCSP-5	46	Log13	9d	Ren
EC	-	RT9193-30PQW	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
EC	-	XC6223G22B9R-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
EC	-	XC9245A2AC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.05V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
EC0	-	XC9237B20C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EC0	-	XC9237B20C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EC0	-	XC9237B20CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EC096	mk	XC9217C096D	DC-DC-IC	PWM-PWM/PFM st-dwn, 0.9V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC09C	mk	XC9217C09CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 0.9V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC1	-	XC9237B21C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EC1	-	XC9237B21C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EC1	-	XC9237B21CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EC106	mk	XC9217C106D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.0V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC10C	mk	XC9217C10CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.0V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC116	mk	XC9217C116D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.1V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC11C	mk	XC9217C11CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.1V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC126	mk	XC9217C126D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC12C	mk	XC9217C12CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC136	mk	XC9217C136D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.3V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC13C	mk	XC9217C13CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.3V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC146	mk	XC9217C146D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.4V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC14C	mk	XC9217C14CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.4V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC156	mk	XC9217C156D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.5V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC15C	mk	XC9217C15CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.5V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC166	mk	XC9217C166D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.6V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC16C	mk	XC9217C16CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.6V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC176	mk	XC9217C176D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.7V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC17C	mk	XC9217C17CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.7V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC186	mk	XC9217C186D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.8V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC18C	mk	XC9217C18CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.8V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC196	mk	XC9217C196D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.9V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC19C	mk	XC9217C19CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.9V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC2	-	XC9237B22C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EC2	-	XC9237B22C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EC2	-	XC9237B22CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EC206	mk	XC9217C206D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.0V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC20C	mk	XC9217C20CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.0V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC216	mk	XC9217C216D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.1V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC21C	mk	XC9217C21CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.1V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC226	mk	XC9217C226D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.2V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC22C	mk	XC9217C22CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.2V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC236	mk	XC9217C236D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.3V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC23C	mk	XC9217C23CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.3V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC246	mk	XC9217C246D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.4V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC24C	mk	XC9217C24CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.4V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC256	mk	XC9217C256D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.5V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC25C	mk	XC9217C25CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.5V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC266	mk	XC9217C266D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.6V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC26C	mk	XC9217C26CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.6V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC276	mk	XC9217C276D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.7V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC27C	mk	XC9217C27CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.7V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC286	mk	XC9217C286D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.8V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC28C	mk	XC9217C28CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.8V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC296	mk	XC9217C296D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.9V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC29C	mk	XC9217C29CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.9V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC3	-	XC9237B23C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EC3	-	XC9237B23C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EC3	-	XC9237B23CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EC306	mk	XC9217C306D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.0V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC30C	mk	XC9217C30CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.0V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC316	mk	XC9217C316D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.1V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EC31C	mk	XC9217C31CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.1V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC326	mk	XC9217C326D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.2V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC32C	mk	XC9217C32CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.2V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC336	mk	XC9217C336D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.3V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC33C	mk	XC9217C33CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.3V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC346	mk	XC9217C346D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.4V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC34C	mk	XC9217C34CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.4V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC356	mk	XC9217C356D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.5V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC35C	mk	XC9217C35CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.5V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC366	mk	XC9217C366D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.6V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC36C	mk	XC9217C36CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.6V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC376	mk	XC9217C376D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.7V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC37C	mk	XC9217C37CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.7V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC386	mk	XC9217C386D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.8V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC38C	mk	XC9217C38CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.8V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC396	mk	XC9217C396D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.9V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC39C	mk	XC9217C39CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.9V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC4	-	XC9237B24C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EC4	-	XC9237B24C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EC4	-	XC9237B24CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EC406	mk	XC9217C406D	DC-DC-IC	PWM-PWM/PFM st-dwn, 4.0V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC40C	mk	XC9217C40CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 4.0V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
EC5	-	XC9237B25C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EC5	-	XC9237B25C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EC5	-	XC9237B25CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EC6	-	XC9237B26C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EC6	-	XC9237B26C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EC6	-	XC9237B26CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EC7	-	XC9237B27C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EC7	-	XC9237B27C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EC7	-	XC9237B27CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EC8	-	XC9237B28C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EC8	-	XC9237B28C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EC8	-	XC9237B28CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EC9	-	XC9237B29C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EC9	-	XC9237B29C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EC9	-	XC9237B29CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ECA	-	XC9237B2AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ECA	-	XC9237B2AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ECA	-	XC9237B2ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ECB	-	XC9237B2BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ECB	-	XC9237B2BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ECB	-	XC9237B2BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ECC	-	XC9237B2CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ECC	-	XC9237B2CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ECC	-	XC9237B2CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ECD	-	XC9237B2DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ECD	-	XC9237B2DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ECD	-	XC9237B2DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ECE	-	XC9237B2EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ECE	-	XC9237B2EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ECE	-	XC9237B2ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ECF	-	XC9237B2FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ECF	-	XC9237B2FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ECF	-	XC9237B2FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ECH	-	XC9237B2HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ECH	-	XC9237B2HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ECH	-	XC9237B2HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ECK	-	XC9237B2KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ECK	-	XC9237B2KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ECK	-	XC9237B2KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ECL	-	XC9237B2LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ECL	-	XC9237B2LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ECL	-	XC9237B2LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ECM	-	XC9237B2MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ECM	-	XC9237B2MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ECM	-	XC9237B2MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ED	-	R3114K341A	Vdet-IC	3.4V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
ED	-	XC6223G23B9R-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
ED	-	XC9245A2BC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.15V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ED0	-	XC9237B30C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ED0	-	XC9237B30C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ED0	-	XC9237B30CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ED096	mk	XC9217D096D	DC-DC-IC	PWM-PWM/PFM st-dwn, 0.9V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED09C	mk	XC9217D09CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 0.9V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED1	-	XC9237B31C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ED1	-	XC9237B31C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ED1	-	XC9237B31CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ED106	mk	XC9217D106D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.0V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED10C	mk	XC9217D10CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.0V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED116	mk	XC9217D116D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.1V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED11C	mk	XC9217D11CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.1V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED126	mk	XC9217D126D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED12C	mk	XC9217D12CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED136	mk	XC9217D136D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.3V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED13C	mk	XC9217D13CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.3V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED146	mk	XC9217D146D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.4V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED14C	mk	XC9217D14CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.4V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED156	mk	XC9217D156D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.5V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED15C	mk	XC9217D15CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.5V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED166	mk	XC9217D166D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.6V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED16C	mk	XC9217D16CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.6V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED176	mk	XC9217D176D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.7V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED17C	mk	XC9217D17CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.7V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED186	mk	XC9217D186D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.8V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED18C	mk	XC9217D18CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.8V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED196	mk	XC9217D196D	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.9V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED19C	mk	XC9217D19CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.9V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED2	-	XC9237B32C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ED2	-	XC9237B32C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ED2	-	XC9237B32CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ED206	mk	XC9217D206D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.0V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED20C	mk	XC9217D20CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.0V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED216	mk	XC9217D216D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.1V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED21C	mk	XC9217D21CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.1V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED226	mk	XC9217D226D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.2V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED22C	mk	XC9217D22CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.2V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED236	mk	XC9217D236D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.3V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED23C	mk	XC9217D23CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.3V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED246	mk	XC9217D246D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.4V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED24C	mk	XC9217D24CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.4V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED256	mk	XC9217D256D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.5V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED25C	mk	XC9217D25CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.5V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED266	mk	XC9217D266D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.6V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED26C	mk	XC9217D26CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.6V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED276	mk	XC9217D276D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.7V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED27C	mk	XC9217D27CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.7V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED286	mk	XC9217D286D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.8V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED28C	mk	XC9217D28CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.8V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED296	mk	XC9217D296D	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.9V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED29C	mk	XC9217D29CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 2.9V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED3	-	XC9237B33C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ED3	-	XC9237B33C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ED3	-	XC9237B33CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ED306	mk	XC9217D306D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.0V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED30C	mk	XC9217D30CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.0V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED316	mk	XC9217D316D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.1V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED31C	mk	XC9217D31CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.1V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED326	mk	XC9217D326D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.2V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED32C	mk	XC9217D32CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.2V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED336	mk	XC9217D336D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.3V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED33C	mk	XC9217D33CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.3V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED346	mk	XC9217D346D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.4V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED34C	mk	XC9217D34CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.4V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED356	mk	XC9217D356D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.5V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED35C	mk	XC9217D35CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.5V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED366	mk	XC9217D366D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.6V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED36C	mk	XC9217D36CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.6V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED376	mk	XC9217D376D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.7V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED37C	mk	XC9217D37CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.7V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ED386	mk	XC9217D386D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.8V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED38C	mk	XC9217D38CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.8V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED396	mk	XC9217D396D	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.9V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED39C	mk	XC9217D39CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 3.9V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED4	-	XC9237B34C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ED4	-	XC9237B34C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ED4	-	XC9237B34CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ED406	mk	XC9217D406D	DC-DC-IC	PWM-PWM/PFM st-dwn, 4.0V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED40C	mk	XC9217D40CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 4.0V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ED5	-	XC9237B35C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ED5	-	XC9237B35C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ED5	-	XC9237B35CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ED6	-	XC9237B36C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ED6	-	XC9237B36C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ED6	-	XC9237B36CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ED7	-	XC9237B37C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ED7	-	XC9237B37C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ED7	-	XC9237B37CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ED8	-	XC9237B38C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ED8	-	XC9237B38C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ED8	-	XC9237B38CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ED9	-	XC9237B39C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ED9	-	XC9237B39C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ED9	-	XC9237B39CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EDA	-	XC9237B3AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EDA	-	XC9237B3AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EDA	-	XC9237B3ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EDB	-	XC9237B3BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EDB	-	XC9237B3BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EDB	-	XC9237B3BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EDC	-	XC9237B3CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EDC	-	XC9237B3CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EDC	-	XC9237B3CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EDD	-	XC9237B3DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EDD	-	XC9237B3DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EDD	-	XC9237B3DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EDE	-	XC9237B3EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EDE	-	XC9237B3EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EDE	-	XC9237B3ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EDF	-	XC9237B3FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EDF	-	XC9237B3FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EDF	-	XC9237B3FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EDH	-	XC9237B3HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EDH	-	XC9237B3HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EDH	-	XC9237B3HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EDK	-	XC9237B3KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EDK	-	XC9237B3KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EDK	-	XC9237B3KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EDL	-	XC9237B3LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EDL	-	XC9237B3LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EDL	-	XC9237B3LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EDM	-	XC9237B3MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EDM	-	XC9237B3MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EDM	-	XC9237B3MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EE	-	R3114K351A	Vdet-IC	3.5V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
EE	-	RD74LVC1G07WPE	CMOS-Log	Noninverting buffer/driver (ODO)	WCSP-5	46	Log8	9d	Ren
EE	-	XC6223G24B9R-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
EE	-	XC9245A2CC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.25V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
EE0	-	XC9237B40C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EE0	-	XC9237B40C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EE0	-	XC9237B40CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EF	-	R3114K361A	Vdet-IC	3.6V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
EF	-	RD74LVC1G79WPE	CMOS-Log	Positive edge-triggered D-type flip-flop	WCSP-5	46	Log20	9d	Ren
EF	-	XC6223G25B9R-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
EF	-	XC9245A2DC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.35V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
EF8	-	XC9237B08D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EF8	-	XC9237B08D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EF8	-	XC9237B08DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EF8	-	XCL207B083AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 0.8V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EF9	-	XC9237B09D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EF9	-	XC9237B09D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EF9	-	XC9237B09DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EF9	-	XCL207B093AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 0.9V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EFL	-	XC9237B0LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EFL	-	XC9237B0LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EFL	-	XC9237B0LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EFL	-	XCL207B0L3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 0.85V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EFM	-	XC9237B0MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EFM	-	XC9237B0MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EFM	-	XC9237B0MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EFM	-	XCL207B0M3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 0.95V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EG	-	R3114K371A	Vdet-IC	3.7V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
EGF	me	MIC5330-1.8/1.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.5V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EGG	me	MIC5330-1.8/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.8V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EGW	me	MIC5330-1.8/1.6YML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.6V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EH	-	LD6805K/16H	LVR-IC	LDO, 1.6V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
EH	-	R3114K381A	Vdet-IC	3.8V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
EH	-	RD74LVC1G240WPE	CMOS-Log	Bus buffer inverted with 3–state output	WCSP-5	46	Log22	9d	Ren
EH	-	XC6223G26B9R-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
EH	-	XC9245A2EC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.45V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
EH0	-	XC9237B10D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EH0	-	XC9237B10D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EH0	-	XC9237B10DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EH0	-	XCL207B103AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.0V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EH1	-	XC9237B11D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EH1	-	XC9237B11D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EH1	-	XC9237B11DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EH1	-	XCL207B113AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.1V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EH2	-	XC9237B12D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EH2	-	XC9237B12D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EH2	-	XC9237B12DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EH2	-	XCL207B123AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.2V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EH3	-	XC9237B13D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EH3	-	XC9237B13D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EH3	-	XC9237B13DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EH3	-	XCL207B133AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.3V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EH4	-	XC9237B14D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EH4	-	XC9237B14D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EH4	-	XC9237B14DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EH4	-	XCL207B143AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.4V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EH5	-	XC9237B15D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EH5	-	XC9237B15D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EH5	-	XC9237B15DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EH5	-	XCL207B153AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.5V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EH6	-	XC9237B16D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EH6	-	XC9237B16D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EH6	-	XC9237B16DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EH6	-	XCL207B163AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.6V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EH7	-	XC9237B17D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EH7	-	XC9237B17D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EH7	-	XC9237B17DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EH7	-	XCL207B173AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.7V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EH8	-	XC9237B18D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EH8	-	XC9237B18D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EH8	-	XC9237B18DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EH8	-	XCL207B183AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.8V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EH9	-	XC9237B19D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EH9	-	XC9237B19D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EH9	-	XC9237B19DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EH9	-	XCL207B193AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.9V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EHA	-	XC9237B1AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EHA	-	XC9237B1AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EHA	-	XC9237B1ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EHA	-	XCL207B1A3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.05V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EHB	-	XC9237B1BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EHB	-	XC9237B1BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EHB	-	XC9237B1BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EHB	-	XCL207B1B3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.15V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EHC	-	XC9237B1CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EHC	-	XC9237B1CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EHC	-	XC9237B1CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EHC	-	XCL207B1C3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.25V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EHD	-	XC9237B1DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EHD	-	XC9237B1DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EHD	-	XC9237B1DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EHD	-	XCL207B1D3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.35V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EHE	-	XC9237B1ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EHE	-	XC9237B1ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EHE	-	XC9237B1EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EHE	-	XCL207B1E3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.45V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EHF	-	XC9237B1FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EHF	-	XC9237B1FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EHF	-	XC9237B1FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EHF	-	XCL207B1F3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.55V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EHH	-	XC9237B1HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EHH	-	XC9237B1HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EHH	-	XC9237B1HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EHH	-	XCL207B1H3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.65V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EHK	-	XC9237B1KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EHK	-	XC9237B1KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EHK	-	XC9237B1KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EHK	-	XCL207B1K3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.75V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EHL	-	XC9237B1LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EHL	-	XC9237B1LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EHL	-	XC9237B1LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EHL	-	XCL207B1L3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.85V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EHM	-	XC9237B1MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EHM	-	XC9237B1MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EHM	-	XC9237B1MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EHM	-	XCL207B1M3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.95V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EJ	-	R3114K391A	Vdet-IC	3.9V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
EJ	-	RT9013-13PQW	LVR-IC	LDO, 1.3V±2%, 500mA, +CE	WDFN-6	49xu	VR4	9a	Rct
EJG	me	MIC5330-2.5/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.8V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EJJ	me	MIC5330-2.5/2.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.5V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EK	-	HD74LVC1G17CLE	CMOS-Log	Schmitt-trigger	WCSP-5	46	Log11	9d	Ren
EK	-	R3114K401A	Vdet-IC	4.0V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
EK	-	RD74LVC1G17WPE	CMOS-Log	Schmitt-trigger	WCSP-5	46	Log11	9d	Ren
EK	-	XC6223G27B9R-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
EK	-	XC9245A2FC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.55V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
EK0	-	XC9237B20D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EK0	-	XC9237B20D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EK0	-	XC9237B20DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EK0	-	XCL207B203AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.0V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EK1	-	XC9237B21D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EK1	-	XC9237B21D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EK1	-	XC9237B21DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EK1	-	XCL207B213AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.1V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EK2	-	XC9237B22D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EK2	-	XC9237B22D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EK2	-	XC9237B22DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EK2	-	XCL207B223AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.2V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EK3	-	XC9237B23D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EK3	-	XC9237B23D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EK3	-	XC9237B23DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EK3	-	XCL207B233AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.3V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EK4	-	XC9237B24D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EK4	-	XC9237B24D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EK4	-	XC9237B24DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EK4	-	XCL207B243AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.4V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EK5	-	XC9237B25D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EK5	-	XC9237B25D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EK5	-	XC9237B25DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EK5	-	XCL207B253AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.5V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EK6	-	XC9237B26D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EK6	-	XC9237B26D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EK6	-	XC9237B26DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EK6	-	XCL207B263AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.6V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EK7	-	XC9237B27D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EK7	-	XC9237B27D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EK7	-	XC9237B27DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EK7	-	XCL207B273AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.7V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EK8	-	XC9237B28D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EK8	-	XC9237B28D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EK8	-	XC9237B28DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EK8	-	XCL207B283AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.8V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EK9	-	XC9237B29D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EK9	-	XC9237B29D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EK9	-	XC9237B29DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EK9	-	XCL207B293AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.9V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EKA	-	XC9237B2AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EKA	-	XC9237B2AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EKA	-	XC9237B2ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EKA	-	XCL207B2A3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.05V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EKB	-	XC9237B2BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EKB	-	XC9237B2BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EKB	-	XC9237B2BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EKB	-	XCL207B2B3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.15V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EKC	-	XC9237B2CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EKC	-	XC9237B2CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EKC	-	XC9237B2CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EKC	-	XCL207B2C3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.25V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EKD	-	XC9237B2DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EKD	-	XC9237B2DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EKD	-	XC9237B2DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EKD	-	XCL207B2D3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.35V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EKD	me	MIC5330-2.6/1.85YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/1.85±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EKE	-	XC9237B2ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EKE	-	XC9237B2ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EKE	-	XC9237B2EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EKE	-	XCL207B2E3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.45V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EKF	-	XC9237B2FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EKF	-	XC9237B2FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EKF	-	XC9237B2FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EKF	-	XCL207B2F3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.55V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EKG	me	MIC5330-2.6/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/1.8V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EKH	-	XC9237B2HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EKH	-	XC9237B2HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EKH	-	XC9237B2HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EKH	-	XCL207B2H3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.65V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EKK	-	XC9237B2KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EKK	-	XC9237B2KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EKK	-	XC9237B2KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EKK	-	XCL207B2K3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.75V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EKL	-	XC9237B2LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EKL	-	XC9237B2LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EKL	-	XC9237B2LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EKL	-	XCL207B2L3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.85V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EKM	-	XC9237B2MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EKM	-	XC9237B2MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EKM	-	XC9237B2MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EKM	-	XCL207B2M3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.95V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
el	-	BU20UA3WNVX	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
eL	-	NX3V1G384GM	CMOS-Log	Single-pole single-throw analog switch	SOT886	57	Log86	9z	Nxp
EL	-	R3114K411A	Vdet-IC	4.1V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
EL	-	XC6223G28B9R-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
EL	-	XC9245A2HC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.65V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
EL0	-	XC9237B30D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EL0	-	XC9237B30D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EL0	-	XC9237B30DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EL0	-	XCL207B303AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.0V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EL1	-	XC9237B31D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EL1	-	XC9237B31D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EL1	-	XC9237B31DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EL1	-	XCL207B313AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.1V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EL2	-	XC9237B32D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EL2	-	XC9237B32D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EL2	-	XC9237B32DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EL2	-	XCL207B323AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.2V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EL3	-	XC9237B33D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EL3	-	XC9237B33D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EL3	-	XC9237B33DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EL3	-	XCL207B333AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.3V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EL4	-	XC9237B34D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EL4	-	XC9237B34D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EL4	-	XC9237B34DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EL4	-	XCL207B343AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.4V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EL5	-	XC9237B35D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EL5	-	XC9237B35D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EL5	-	XC9237B35DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EL5	-	XCL207B353AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.5V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EL6	-	XC9237B36D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EL6	-	XC9237B36D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EL6	-	XC9237B36DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EL6	-	XCL207B363AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.6V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EL7	-	XC9237B37D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EL7	-	XC9237B37D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EL7	-	XC9237B37DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EL7	-	XCL207B373AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.7V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EL8	-	XC9237B38D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EL8	-	XC9237B38D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EL8	-	XC9237B38DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EL8	-	XCL207B383AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.8V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EL9	-	XC9237B39D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EL9	-	XC9237B39D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EL9	-	XC9237B39DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EL9	-	XCL207B393AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.9V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
ELA	-	XC9237B3AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ELA	-	XC9237B3AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ELA	-	XC9237B3ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ELA	-	XCL207B3A3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.05V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
ELB	-	XC9237B3BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ELB	-	XC9237B3BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ELB	-	XC9237B3BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ELB	-	XCL207B3B3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.15V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
ELC	-	XC9237B3CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ELC	-	XC9237B3CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ELC	-	XC9237B3CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ELC	-	XCL207B3C3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.25V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
ELD	-	XC9237B3DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ELD	-	XC9237B3DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ELD	-	XC9237B3DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ELD	-	XCL207B3D3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.35V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
ELE	-	XC9237B3ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ELE	-	XC9237B3ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ELE	-	XC9237B3EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ELE	-	XCL207B3E3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.45V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
ELF	-	XC9237B3FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ELF	-	XC9237B3FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ELF	-	XC9237B3FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ELF	-	XCL207B3F3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.55V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
ELH	-	XC9237B3HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ELH	-	XC9237B3HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ELH	-	XC9237B3HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ELH	-	XCL207B3H3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.65V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
ELK	-	XC9237B3KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ELK	-	XC9237B3KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ELK	-	XC9237B3KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ELK	-	XCL207B3K3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.75V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
ELL	-	XC9237B3LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ELL	-	XC9237B3LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ELL	-	XC9237B3LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ELL	-	XCL207B3L3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.85V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
ELL	me	MIC5330-2.7/2.7YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.7V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
ELM	-	XC9237B3MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ELM	-	XC9237B3MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ELM	-	XC9237B3MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ELM	-	XCL207B3M3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.95V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EM	-	R3114K421A	Vdet-IC	4.2V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
EM	-	RT9193-29PQW	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
EM	-	SiP21107DVP-46-E3	LVR-IC	LDO, 4.6V±1%, 150mA, +CE, -Error	TSC75-6L	91d4	VR17	9m	Vs

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EM	-	XC6223G29B9R-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
EM	-	XC9245A2KC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.75V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
EM0	-	XC9237B40D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EM0	-	XC9237B40D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EM0	-	XC9237B40DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EM0	-	XCL207B403AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 4.0V±2%, 600mA, CL	CL-2025	67dc7	DC9	9a	Tor
EMF	me	MIC5330-2.8/1.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EMG	me	MIC5330-2.8/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EMK	me	MIC5330-2.8/2.6YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.6V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EMM	me	MIC5330-2.8/2.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EMP00	-	EMA1901-50WL09G	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.25W(5V/8Ω), shutdown	BGA-9	39	AFP44	9k	Emp
EMP01	-	EMA2901-50WL09GR	Lin-IC	AF PA, BTL, 2.5..5.5V, 2.5W(5V/8Ω), shutdown	BGA-9	39	AFP44	9k	Emp
EMP02	-	EMA1903-50WL09G	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	AFP53	9k	Emp
EN	-	R3114K431A	Vdet-IC	4.3V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
EN	-	XC6223G30B9R-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
EN	-	XC9245A2LC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.85V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
EN8	-	XC9237G08C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EN8	-	XC9237G08C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EN8	-	XC9237G08CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EN9	-	XC9237G09C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EN9	-	XC9237G09C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EN9	-	XC9237G09CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
END	me	MIC5330-2.85/1.85YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.85V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
ENK	me	MIC5330-2.85/2.6YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.6V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
ENL	-	XC9237G0LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ENL	-	XC9237G0LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ENL	-	XC9237G0LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ENM	-	XC9237G0MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ENM	-	XC9237G0MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ENM	-	XC9237G0MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ENN	me	MIC5330-2.85/2.85YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.85V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EOF	me	MIC5330-2.9/1.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/1.5V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EOG	me	MIC5330-2.9/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/1.8V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EOO	me	MIC5330-2.9/2.9YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/2.9V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EP	-	LD6805K/16P	LVR-IC	LDO, 1.6V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
EP	-	R3114K441A	Vdet-IC	4.4V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
EP	-	XC6223G31B9R-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
EP	-	XC9245A2MC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.95V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
EP0	-	XC9237G10C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EP0	-	XC9237G10C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EP0	-	XC9237G10CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EP1	-	XC9237G11C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EP1	-	XC9237G11C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EP1	-	XC9237G11CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EP2	-	XC9237G12C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EP2	-	XC9237G12C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EP2	-	XC9237G12CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EP3	-	XC9237G13C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EP3	-	XC9237G13C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EP3	-	XC9237G13CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EP4	-	XC9237G14C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EP4	-	XC9237G14C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EP4	-	XC9237G14CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EP5	-	XC9237G15C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EP5	-	XC9237G15C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EP5	-	XC9237G15CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EP6	-	XC9237G16C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EP6	-	XC9237G16C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EP6	-	XC9237G16CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EP7	-	XC9237G17C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EP7	-	XC9237G17C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EP7	-	XC9237G17CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EP8	-	XC9237G18C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EP8	-	XC9237G18C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EP8	-	XC9237G18CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EP9	-	XC9237G19C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EP9	-	XC9237G19C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EP9	-	XC9237G19CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EPA	-	XC9237G1AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EPA	-	XC9237G1AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EPA	-	XC9237G1ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EPB	-	XC9237G1BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EPB	-	XC9237G1BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EPB	-	XC9237G1BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EPC	-	XC9237G1CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EPC	-	XC9237G1CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EPC	-	XC9237G1CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EPD	-	XC9237G1DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EPD	-	XC9237G1DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EPD	-	XC9237G1DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EPE	-	XC9237G1EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EPE	-	XC9237G1EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EPE	-	XC9237G1ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EPF	-	XC9237G1FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EPF	-	XC9237G1FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EPF	-	XC9237G1FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EPG	me	MIC5330-3.0/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.8V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EPH	-	XC9237G1HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EPH	-	XC9237G1HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EPH	-	XC9237G1HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EPJ	me	MIC5330-3.0/2.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.5V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EPK	-	XC9237G1KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EPK	-	XC9237G1KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EPK	-	XC9237G1KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EPK	me	MIC5330-3.0/2.6YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.6V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EPL	-	XC9237G1LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EPL	-	XC9237G1LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EPL	-	XC9237G1LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EPM	-	XC9237G1MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EPM	-	XC9237G1MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EPM	-	XC9237G1MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EPM	me	MIC5330-3.0/2.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.8V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EPN	me	MIC5330-3.0/2.85YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.85V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EPP	me	MIC5330-3.0/3.0YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
EQ	-	R3114K451A	Vdet-IC	4.5V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
ER	-	R3114K461A	Vdet-IC	4.6V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
ER	-	XC6223G32B9R-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
ER	-	XC9245A3AC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
ER0	-	XC9237G20C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ER0	-	XC9237G20C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ER0	-	XC9237G20CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ER1	-	XC9237G21C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ER1	-	XC9237G21C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ER1	-	XC9237G21CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ER2	-	XC9237G22C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ER2	-	XC9237G22C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ER2	-	XC9237G22CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ER3	-	XC9237G23C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ER3	-	XC9237G23C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ER3	-	XC9237G23CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ER4	-	XC9237G24C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ER4	-	XC9237G24C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ER4	-	XC9237G24CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ER5	-	XC9237G25C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ER5	-	XC9237G25C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ER5	-	XC9237G25CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ER6	-	XC9237G26C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ER6	-	XC9237G26C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ER6	-	XC9237G26CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ER7	-	XC9237G27C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ER7	-	XC9237G27C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ER7	-	XC9237G27CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ER8	-	XC9237G28C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ER8	-	XC9237G28C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ER8	-	XC9237G28CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ER9	-	XC9237G29C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ER9	-	XC9237G29C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ER9	-	XC9237G29CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ERA	-	XC9237G2AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ERA	-	XC9237G2AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ERA	-	XC9237G2ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ERB	-	XC9237G2BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ERB	-	XC9237G2BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ERB	-	XC9237G2BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ERC	-	XC9237G2CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ERC	-	XC9237G2CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ERC	-	XC9237G2CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ERD	-	XC9237G2DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ERD	-	XC9237G2DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ERD	-	XC9237G2DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ERE	-	XC9237G2EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ERE	-	XC9237G2EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ERE	-	XC9237G2ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ERF	-	XC9237G2FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ERF	-	XC9237G2FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ERF	-	XC9237G2FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ERH	-	XC9237G2HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ERH	-	XC9237G2HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ERH	-	XC9237G2HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ERK	-	XC9237G2KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ERK	-	XC9237G2KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ERK	-	XC9237G2KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ERL	-	XC9237G2LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ERL	-	XC9237G2LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ERL	-	XC9237G2LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ERM	-	XC9237G2MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ERM	-	XC9237G2MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ERM	-	XC9237G2MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ES	-	R3114K471A	Vdet-IC	4.7V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
ES	-	XC6223G33B9R-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
ES	-	XC9245A3BC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
ES0	-	XC9237G30C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ES0	-	XC9237G30C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ES0	-	XC9237G30CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ES1	-	XC9237G31C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ES1	-	XC9237G31C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ES1	-	XC9237G31CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ES2	-	XC9237G32C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ES2	-	XC9237G32C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ES2	-	XC9237G32CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ES3	-	XC9237G33C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ES3	-	XC9237G33C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ES3	-	XC9237G33CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ES4	-	XC9237G34C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ES4	-	XC9237G34C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ES4	-	XC9237G34CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ES5	-	XC9237G35C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ES5	-	XC9237G35C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ES5	-	XC9237G35CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ES6	-	XC9237G36C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ES6	-	XC9237G36C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ES6	-	XC9237G36CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ES7	-	XC9237G37C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ES7	-	XC9237G37C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ES7	-	XC9237G37CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ES8	-	XC9237G38C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ES8	-	XC9237G38C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ES8	-	XC9237G38CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ES9	-	XC9237G39C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ES9	-	XC9237G39C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ES9	-	XC9237G39CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ESA	-	XC9237G3AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ESA	-	XC9237G3AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ESA	-	XC9237G3ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ESB	-	XC9237G3BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ESB	-	XC9237G3BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ESB	-	XC9237G3BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ESC	-	XC9237G3CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ESC	-	XC9237G3CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ESC	-	XC9237G3CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ESD	-	XC9237G3DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ESD	-	XC9237G3DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ESD	-	XC9237G3DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ESE	-	XC9237G3EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ESE	-	XC9237G3EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ESE	-	XC9237G3ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ESF	-	XC9237G3FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ESF	-	XC9237G3FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ESF	-	XC9237G3FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ESF	me	MIC5330-3.3/1.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.5V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
ESG	me	MIC5330-3.3/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
ESH	-	XC9237G3HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ESH	-	XC9237G3HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ESH	-	XC9237G3HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ESJ	me	MIC5330-3.3/2.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.5V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
ESK	-	XC9237G3KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ESK	-	XC9237G3KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ESK	-	XC9237G3KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ESK	me	MIC5330-3.3/2.6YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.6V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
ESL	-	XC9237G3LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ESL	-	XC9237G3LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ESL	-	XC9237G3LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ESM	-	XC9237G3MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ESM	-	XC9237G3MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ESM	-	XC9237G3MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ESM	me	MIC5330-3.3/2.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
ESN	me	MIC5330-3.3/2.85YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.85V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
ESO	me	MIC5330-3.3/2.9YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.9V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
ESP	me	MIC5330-3.3/3.0YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.0V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
ESR	me	MIC5330-3.3/3.2YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.2V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
ESS	me	MIC5330-3.3/3.3YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±2%, 300mA, +CE	MLF-8	75e9	VR29	9i	Mcr
ET	-	R3114K481A	Vdet-IC	4.8V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
ET	-	SiP21107DVP-285-E3	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, -Error	TSC75-6L	91d4	VR17	9m	Vs
ET	-	XC6223G34B9R-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
ET	-	XC9245A3CC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
ET0	-	XC9237G40C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ET0	-	XC9237G40C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ET0	-	XC9237G40CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
ET8	-	XC6215B0927R-G	LVR-IC	LDO, 0.9V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ET8	-	XC6215B092GR	LVR-IC	LDO, 0.9V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ET8	-	XC6215P092HR	LVR-IC	LDO, 0.9V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ET9	-	XC6215B1027R-G	LVR-IC	LDO, 1.0V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ET9	-	XC6215B102GR	LVR-IC	LDO, 1.0V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ET9	-	XC6215P102HR	LVR-IC	LDO, 1.0V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETA	-	XC6215B1127R-G	LVR-IC	LDO, 1.1V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETA	-	XC6215B112GR	LVR-IC	LDO, 1.1V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETA	-	XC6215P112HR	LVR-IC	LDO, 1.1V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETB	-	XC6215B1227R-G	LVR-IC	LDO, 1.2V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETB	-	XC6215B122GR	LVR-IC	LDO, 1.2V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETB	-	XC6215P122HR	LVR-IC	LDO, 1.2V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETC	-	XC6215B1327R-G	LVR-IC	LDO, 1.3V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETC	-	XC6215B132GR	LVR-IC	LDO, 1.3V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETC	-	XC6215P132HR	LVR-IC	LDO, 1.3V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETD	-	XC6215B1427R-G	LVR-IC	LDO, 1.4V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETD	-	XC6215B142GR	LVR-IC	LDO, 1.4V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETD	-	XC6215P142HR	LVR-IC	LDO, 1.4V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETE	-	XC6215B1527R-G	LVR-IC	LDO, 1.5V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETE	-	XC6215B152GR	LVR-IC	LDO, 1.5V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETE	-	XC6215P152HR	LVR-IC	LDO, 1.5V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETF	-	XC6215B1627R-G	LVR-IC	LDO, 1.6V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETF	-	XC6215B162GR	LVR-IC	LDO, 1.6V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETF	-	XC6215P162HR	LVR-IC	LDO, 1.6V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETH	-	XC6215B1727R-G	LVR-IC	LDO, 1.7V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETH	-	XC6215B172GR	LVR-IC	LDO, 1.7V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETH	-	XC6215P172HR	LVR-IC	LDO, 1.7V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETK	-	XC6215B1827R-G	LVR-IC	LDO, 1.8V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETK	-	XC6215B182GR	LVR-IC	LDO, 1.8V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETK	-	XC6215P182HR	LVR-IC	LDO, 1.8V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETL	-	XC6215B1927R-G	LVR-IC	LDO, 1.9V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETL	-	XC6215B192GR	LVR-IC	LDO, 1.9V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ETL	-	XC6215P192HR	LVR-IC	LDO, 1.9V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETM	-	XC6215B2027R-G	LVR-IC	LDO, 2.0V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETM	-	XC6215B202GR	LVR-IC	LDO, 2.0V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETM	-	XC6215P202HR	LVR-IC	LDO, 2.0V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETN	-	XC6215B2127R-G	LVR-IC	LDO, 2.1V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETN	-	XC6215B212GR	LVR-IC	LDO, 2.1V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETN	-	XC6215P212HR	LVR-IC	LDO, 2.1V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETP	-	XC6215B2227R-G	LVR-IC	LDO, 2.2V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETP	-	XC6215B222GR	LVR-IC	LDO, 2.2V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETP	-	XC6215P222HR	LVR-IC	LDO, 2.2V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETR	-	XC6215B2327R-G	LVR-IC	LDO, 2.3V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETR	-	XC6215B232GR	LVR-IC	LDO, 2.3V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETR	-	XC6215P232HR	LVR-IC	LDO, 2.3V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETS	-	XC6215B2427R-G	LVR-IC	LDO, 2.4V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETS	-	XC6215B242GR	LVR-IC	LDO, 2.4V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETS	-	XC6215P242HR	LVR-IC	LDO, 2.4V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETT	-	XC6215B2527R-G	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETT	-	XC6215B252GR	LVR-IC	LDO, 2.5V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETT	-	XC6215P252HR	LVR-IC	LDO, 2.5V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETU	-	XC6215B2627R-G	LVR-IC	LDO, 2.6V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETU	-	XC6215B262GR	LVR-IC	LDO, 2.6V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETU	-	XC6215P262HR	LVR-IC	LDO, 2.6V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETV	-	XC6215B2727R-G	LVR-IC	LDO, 2.7V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETV	-	XC6215B272GR	LVR-IC	LDO, 2.7V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETV	-	XC6215P272HR	LVR-IC	LDO, 2.7V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETX	-	XC6215B2827R-G	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETX	-	XC6215B282GR	LVR-IC	LDO, 2.8V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETX	-	XC6215P282HR	LVR-IC	LDO, 2.8V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETY	-	XC6215B2927R-G	LVR-IC	LDO, 2.9V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETY	-	XC6215B292GR	LVR-IC	LDO, 2.9V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETY	-	XC6215P292HR	LVR-IC	LDO, 2.9V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
ETZ	-	XC6215B3027R-G	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
ETZ	-	XC6215B302GR	LVR-IC	LDO, 3.0V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
ETZ	-	XC6215P302HR	LVR-IC	LDO, 3.0V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EU	-	R3114K491A	Vdet-IC	4.9V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
EU	-	XC6223G35B9R-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
EU	-	XC9245A3DC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
EU0	-	XC6215B3127R-G	LVR-IC	LDO, 3.1V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EU0	-	XC6215B312GR	LVR-IC	LDO, 3.1V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EU0	-	XC6215P312HR	LVR-IC	LDO, 3.1V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EU1	-	XC6215B3227R-G	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EU1	-	XC6215B322GR	LVR-IC	LDO, 3.2V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EU1	-	XC6215P322HR	LVR-IC	LDO, 3.2V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EU2	-	XC6215B3327R-G	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EU2	-	XC6215B332GR	LVR-IC	LDO, 3.3V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EU2	-	XC6215P332HR	LVR-IC	LDO, 3.3V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EU3	-	XC6215B3427R-G	LVR-IC	LDO, 3.4V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EU3	-	XC6215B342GR	LVR-IC	LDO, 3.4V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EU3	-	XC6215P342HR	LVR-IC	LDO, 3.4V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EU4	-	XC6215B3527R-G	LVR-IC	LDO, 3.5V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EU4	-	XC6215B352GR	LVR-IC	LDO, 3.5V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EU4	-	XC6215P352HR	LVR-IC	LDO, 3.5V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EU5	-	XC6215B3627R-G	LVR-IC	LDO, 3.6V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EU5	-	XC6215B362GR	LVR-IC	LDO, 3.6V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EU5	-	XC6215P362HR	LVR-IC	LDO, 3.6V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EU6	-	XC6215B3727R-G	LVR-IC	LDO, 3.7V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EU6	-	XC6215B372GR	LVR-IC	LDO, 3.7V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EU6	-	XC6215P372HR	LVR-IC	LDO, 3.7V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EU7	-	XC6215B3827R-G	LVR-IC	LDO, 3.8V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EU7	-	XC6215B382GR	LVR-IC	LDO, 3.8V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EU7	-	XC6215P382HR	LVR-IC	LDO, 3.8V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EU8	-	XC6215B3927R-G	LVR-IC	LDO, 3.9V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EU8	-	XC6215B392GR	LVR-IC	LDO, 3.9V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EU8	-	XC6215P392HR	LVR-IC	LDO, 3.9V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EU8	-	XC9237G08D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EU8	-	XC9237G08D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EU8	-	XC9237G08DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EU9	-	XC6215B4027R-G	LVR-IC	LDO, 4.0V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EU9	-	XC6215B402GR	LVR-IC	LDO, 4.0V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EU9	-	XC6215P402HR	LVR-IC	LDO, 4.0V±2%, 200mA	USP-3	17vj	VR1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EU9	-	XC9237G09D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EU9	-	XC9237G09D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EU9	-	XC9237G09DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EUA	-	XC6215B4127R-G	LVR-IC	LDO, 4.1V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EUA	-	XC6215B412GR	LVR-IC	LDO, 4.1V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EUA	-	XC6215P412HR	LVR-IC	LDO, 4.1V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EUB	-	XC6215B4227R-G	LVR-IC	LDO, 4.2V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EUB	-	XC6215B422GR	LVR-IC	LDO, 4.2V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EUB	-	XC6215P422HR	LVR-IC	LDO, 4.2V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EUC	-	XC6215B4327R-G	LVR-IC	LDO, 4.3V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EUC	-	XC6215B432GR	LVR-IC	LDO, 4.3V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EUC	-	XC6215P432HR	LVR-IC	LDO, 4.3V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EUD	-	XC6215B4427R-G	LVR-IC	LDO, 4.4V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EUD	-	XC6215B442GR	LVR-IC	LDO, 4.4V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EUD	-	XC6215P442HR	LVR-IC	LDO, 4.4V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EUE	-	XC6215B4527R-G	LVR-IC	LDO, 4.5V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EUE	-	XC6215B452GR	LVR-IC	LDO, 4.5V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EUE	-	XC6215P452HR	LVR-IC	LDO, 4.5V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EUF	-	XC6215B4627R-G	LVR-IC	LDO, 4.6V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EUF	-	XC6215B462GR	LVR-IC	LDO, 4.6V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EUF	-	XC6215P462HR	LVR-IC	LDO, 4.6V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EUH	-	XC6215B4727R-G	LVR-IC	LDO, 4.7V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EUH	-	XC6215B472GR	LVR-IC	LDO, 4.7V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EUH	-	XC6215P472HR	LVR-IC	LDO, 4.7V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EUK	-	XC6215B4827R-G	LVR-IC	LDO, 4.8V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EUK	-	XC6215B482GR	LVR-IC	LDO, 4.8V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EUK	-	XC6215P482HR	LVR-IC	LDO, 4.8V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EUL	-	XC6215B4927R-G	LVR-IC	LDO, 4.9V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EUL	-	XC6215B492GR	LVR-IC	LDO, 4.9V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EUL	-	XC6215P492HR	LVR-IC	LDO, 4.9V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EUL	-	XC9237G0LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EUL	-	XC9237G0LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EUL	-	XC9237G0LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EUM	-	XC6215B5027R-G	LVR-IC	LDO, 5.0V±2%, 200mA, +CE	USPN-4	58vm	VR4	9h	Tor
EUM	-	XC6215B502GR	LVR-IC	LDO, 5.0V±2%, 200mA, +CE	USP-4	45vm	VR4	9b	Tor
EUM	-	XC6215P502HR	LVR-IC	LDO, 5.0V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
EUM	-	XC9237G0MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EUM	-	XC9237G0MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EUM	-	XC9237G0MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EV	-	R3114K501A	Vdet-IC	5V±0.8%, -Reset ODO	DFN1010-4	48vd9	VD9	9a	Ric
EV	-	XC6223G36B9R-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
EV	-	XC9245A3EC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
EV0	-	XC9237G10D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EV0	-	XC9237G10D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EV0	-	XC9237G10DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EV1	-	XC9237G11D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EV1	-	XC9237G11D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EV1	-	XC9237G11DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EV2	-	XC9237G12D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EV2	-	XC9237G12D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EV2	-	XC9237G12DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EV3	-	XC9237G13D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EV3	-	XC9237G13D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EV3	-	XC9237G13DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EV4	-	XC9237G14D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EV4	-	XC9237G14D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EV4	-	XC9237G14DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EV5	-	XC9237G15D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EV5	-	XC9237G15D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EV5	-	XC9237G15DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EV6	-	XC9237G16D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EV6	-	XC9237G16D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EV6	-	XC9237G16DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EV7	-	XC9237G17D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EV7	-	XC9237G17D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EV7	-	XC9237G17DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EV8	-	XC9237G18D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EV8	-	XC9237G18D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EV8	-	XC9237G18DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EV9	-	XC9237G19D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EV9	-	XC9237G19D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EV9	-	XC9237G19DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EVA	-	XC9237G1AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EVA	-	XC9237G1AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EVA	-	XC9237G1ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EVB	-	XC9237G1BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EVB	-	XC9237G1BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EVB	-	XC9237G1BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EVC	-	XC9237G1CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EVC	-	XC9237G1CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EVC	-	XC9237G1CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EVD	-	XC9237G1DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EVD	-	XC9237G1DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EVD	-	XC9237G1DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EVE	-	XC9237G1ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EVE	-	XC9237G1ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EVE	-	XC9237G1EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EVF	-	XC9237G1FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EVF	-	XC9237G1FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EVF	-	XC9237G1FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EVH	-	XC9237G1HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EVH	-	XC9237G1HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EVH	-	XC9237G1HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EVK	-	XC9237G1KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EVK	-	XC9237G1KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EVK	-	XC9237G1KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EVL	-	XC9237G1LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EVL	-	XC9237G1LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EVL	-	XC9237G1LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EVM	-	XC9237G1MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EVM	-	XC9237G1MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EVM	-	XC9237G1MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EX	-	XC6223G37B9R-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
EX	-	XC9245A3FC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
EX0	-	XC9237G20D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EX0	-	XC9237G20D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EX0	-	XC9237G20DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EX1	-	XC9237G21D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EX1	-	XC9237G21D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EX1	-	XC9237G21DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EX2	-	XC9237G22D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EX2	-	XC9237G22D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EX2	-	XC9237G22DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EX3	-	XC9237G23D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EX3	-	XC9237G23D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EX3	-	XC9237G23DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EX4	-	XC9237G24D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EX4	-	XC9237G24D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EX4	-	XC9237G24DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EX5	-	XC9237G25D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EX5	-	XC9237G25D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EX5	-	XC9237G25DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EX6	-	XC9237G26D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EX6	-	XC9237G26D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EX6	-	XC9237G26DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EX7	-	XC9237G27D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EX7	-	XC9237G27D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EX7	-	XC9237G27DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EX8	-	XC9237G28D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EX8	-	XC9237G28D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EX8	-	XC9237G28DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EX9	-	XC9237G29D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EX9	-	XC9237G29D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EX9	-	XC9237G29DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EXA	-	XC9237G2AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EXA	-	XC9237G2AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EXA	-	XC9237G2ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EXB	-	XC9237G2BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EXB	-	XC9237G2BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EXB	-	XC9237G2BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EXC	-	XC9237G2CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EXC	-	XC9237G2CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EXC	-	XC9237G2CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EXD	-	XC9237G2DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EXD	-	XC9237G2DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EXD	-	XC9237G2DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EXE	-	XC9237G2ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EXE	-	XC9237G2ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EXE	-	XC9237G2EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EXF	-	XC9237G2FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EXF	-	XC9237G2FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EXF	-	XC9237G2FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EXH	-	XC9237G2HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EXH	-	XC9237G2HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EXH	-	XC9237G2HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EXK	-	XC9237G2KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EXK	-	XC9237G2KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EXK	-	XC9237G2KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EXL	-	XC9237G2LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EXL	-	XC9237G2LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EXL	-	XC9237G2LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EXM	-	XC9237G2MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EXM	-	XC9237G2MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EXM	-	XC9237G2MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EY	-	XC6223G38B9R-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
EY	-	XC9245A3HC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
EY0	-	XC9237G30D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EY0	-	XC9237G30D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EY0	-	XC9237G30DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EY1	-	XC9237G31D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EY1	-	XC9237G31D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EY1	-	XC9237G31DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EY2	-	XC9237G32D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EY2	-	XC9237G32D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EY2	-	XC9237G32DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EY3	-	XC9237G33D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EY3	-	XC9237G33D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EY3	-	XC9237G33DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EY4	-	XC9237G34D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EY4	-	XC9237G34D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EY4	-	XC9237G34DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EY5	-	XC9237G35D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EY5	-	XC9237G35D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EY5	-	XC9237G35DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EY6	-	XC9237G36D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EY6	-	XC9237G36D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EY6	-	XC9237G36DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EY7	-	XC9237G37D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EY7	-	XC9237G37D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EY7	-	XC9237G37DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EY8	-	XC9237G38D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EY8	-	XC9237G38D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EY8	-	XC9237G38DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EY9	-	XC9237G39D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EY9	-	XC9237G39D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EY9	-	XC9237G39DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EYA	-	XC9237G3AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EYA	-	XC9237G3AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EYA	-	XC9237G3ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EYB	-	XC9237G3BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EYB	-	XC9237G3BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EYB	-	XC9237G3BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EYC	-	XC9237G3CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EYC	-	XC9237G3CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EYC	-	XC9237G3CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EYD	-	XC9237G3DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EYD	-	XC9237G3DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EYD	-	XC9237G3DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EYE	-	XC9237G3ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EYE	-	XC9237G3ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
EYE	-	XC9237G3EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EYF	-	XC9237G3FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EYF	-	XC9237G3FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EYF	-	XC9237G3FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EYH	-	XC9237G3HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EYH	-	XC9237G3HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EYH	-	XC9237G3HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EYK	-	XC9237G3KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EYK	-	XC9237G3KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EYK	-	XC9237G3KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EYL	-	XC9237G3LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EYL	-	XC9237G3LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EYL	-	XC9237G3LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EYM	-	XC9237G3MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EYM	-	XC9237G3MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EYM	-	XC9237G3MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
EZ	-	RT9013-27PQW	LVR-IC	LDO, 2.7V±2%, 500mA, +CE	WDFN-6	49xu	VR4	9a	Rct
EZ	-	XC6223G39B9R-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
EZ	-	XC9245A3KC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
EZ0	-	XC9237G40D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
EZ0	-	XC9237G40D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6EL	56dc5	DC1	9a	Tor
EZ0	-	XC9237G40DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, HSST, CL	USP-6C	49dc5	DC1	9a	Tor
f	-	BU15UA3WNVX	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
F	-	BAS70-02L	Si-diode	SBD, GP, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	TSLP-2-1	13d	-	2b	Inf
F	-	HMPP-3862	PIN-diode	Dual, RF, Att, 50V±2%, 1A(1µs), <0.2pF, 22Ω(1mA), <80ns	MP	93cs	-	9a	Agi
F	-	HMPP-3865	PIN-diode	Dual, RF, Att, 50V±2%, 1A(1µs), <0.2pF, 22Ω(1mA), <80ns	MP	93ct	-	9a	Agi
f0	-	FP6121-CVSP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 150mA, +CE	VSON-6	56xv	VR19	9m	Fit
F0	-	R3118K061C	Vdet-IC	0.6V±22.5mV, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
F0	-	RP109L081D	LVR-IC	LDO, 0.8V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
F0	-	XC6221B3117R	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
F0	-	XC6GC5002HR	Vdet-IC	5.0V±2%, +Reset PPO	USP-3	17vdc	VD3	9b	Tor
F03	-	XC61GC5002HR	Vdet-IC	5.0V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
F0A	-	XC6108C50AGR	Vdet-IC	5.0V±2%, Hysteresis, -Reset PPO	USP-4	45ro	VD15	9b	Tor
F0A	-	XC6127C55A7R	Vdet-IC	5.5V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
F0B	-	XC6108C50BGR	Vdet-IC	5.0V±2%, -Reset PPO	USP-4	45ro	VD15	9b	Tor
F0B	-	XC6127C55B7R	Vdet-IC	5.5V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
F0C	-	XC6108C50CGR	Vdet-IC	5.0V±2%, Hysteresis, -Reset PPO	USP-4	45rn	VD15	9b	Tor
F0C	-	XC6127C55C7R	Vdet-IC	5.5V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
F0D	-	XC6108C50DGR	Vdet-IC	5.0V±2%, -Reset PPO	USP-4	45rn	VD15	9b	Tor
F0D	-	XC6127C55D7R	Vdet-IC	5.5V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
F0E	-	XC6127C55E7R	Vdet-IC	5.5V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
F0F	-	XC6127C55F7R	Vdet-IC	5.5V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
F0H	-	XC6127C55G7R	Vdet-IC	5.5V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
F0K	-	XC6127C55H7R	Vdet-IC	5.5V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
F0L	-	XC6127C55J7R	Vdet-IC	5.5V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
F0M	-	XC6127C55K7R	Vdet-IC	5.5V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
f1	-	FP6121-DVSP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 150mA, +CE	VSON-6	56xv	VR19	9m	Fit
F1	-	R3118K071C	Vdet-IC	0.7V±22.5mV, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
F1	-	RP109L091D	LVR-IC	LDO, 0.9V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
F1	-	XC6221B3217R	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
F125	-	R1182K121D5	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F12D	-	R1182K121D	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F13	-	XC61GC5102HR	Vdet-IC	5.1V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
F13D	-	R1182K131D	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F14D	-	R1182K141D	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F15D	-	R1182K151D	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F16D	-	R1182K161D	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F17D	-	R1182K171D	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F185	-	R1182K181D5	LVR-IC	LDO, 1.85V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F18D	-	R1182K181D	LVR-IC	LDO, 1.8V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F19D	-	R1182K191D	LVR-IC	LDO, 1.9V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
f2	-	FP6121-EVSP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 150mA, +CE	VSON-6	56xv	VR19	9m	Fit
F2	-	LM4954TL	Lin-IC	AF PA, BTL, 2.7..9V, 3W(6V/8Ω), shutdown	BGA-9	39	AFP44	9n	Nsc
F2	-	R3118K081C	Vdet-IC	0.8V±22.5mV, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
F2	-	RP109L101D	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
F2	-	XC6221B3317R	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
F2	-	XC6223H12B9R-G	LVR-IC	LDO, 1.25V±20mV, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
F20D	-	R1182K201D	LVR-IC	LDO, 2.0V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F21D	-	R1182K211D	LVR-IC	LDO, 2.1V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F22D	-	R1182K221D	LVR-IC	LDO, 2.2V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
F23	-	XC61GC5202HR	Vdet-IC	5.2V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
F23D	-	R1182K231D	LVR-IC	LDO, 2.3V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F24D	-	R1182K241D	LVR-IC	LDO, 2.4V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F25D	-	R1182K251D	LVR-IC	LDO, 2.5V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
f26	-	XC7WH126GD	CMOS-Log	Dual bus buffer with 3-state output	SOT996-2	54	Log54	9z	Nxp
F26D	-	R1182K261D	LVR-IC	LDO, 2.6V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F27D	-	R1182K271D	LVR-IC	LDO, 2.7V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F285	-	R1182K281D5	LVR-IC	LDO, 2.85V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F28D	-	R1182K281D	LVR-IC	LDO, 2.8V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F29D	-	R1182K291D	LVR-IC	LDO, 2.9V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
f3	-	FP6121-FVSP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	VSON-6	56xv	VR19	9m	Fit
F3	-	R3118K091C	Vdet-IC	0.9V±22.5mV, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
F3	-	RP109L111D	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
F3	-	XC6221B3417R	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
F3	-	XC6223H13B9R-G	LVR-IC	LDO, 1.35V±20mV, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
F30D	-	R1182K301D	LVR-IC	LDO, 3.0V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F31D	-	R1182K311D	LVR-IC	LDO, 3.1V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F32D	-	R1182K321D	LVR-IC	LDO, 3.2V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F33	-	XC61GC5302HR	Vdet-IC	5.3V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
F33D	-	R1182K331D	LVR-IC	LDO, 3.3V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F34D	-	R1182K341D	LVR-IC	LDO, 3.4V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F35D	-	R1182K351D	LVR-IC	LDO, 3.5V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F36D	-	R1182K361D	LVR-IC	LDO, 3.6V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F37D	-	R1182K371D	LVR-IC	LDO, 3.7V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F38D	-	R1182K381D	LVR-IC	LDO, 3.8V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F39D	-	R1182K391D	LVR-IC	LDO, 3.9V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
f4	-	FP6121-GVSP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	VSON-6	56xv	VR19	9m	Fit
F4	-	R3118K101C	Vdet-IC	1.0V±22.5mV, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
F4	-	RP109L121D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
F4	-	XC6221B3517R	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
F4	-	XC6223H14B9R-G	LVR-IC	LDO, 1.45V±20mV, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
F40D	-	R1182K401D	LVR-IC	LDO, 4.0V±2%, 150mA, +CE, CL	PLP1616-6	66ys	VR4	9b	Ric
F43	-	XC61GC5402HR	Vdet-IC	5.4V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
f5	-	FP6121-HVSP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	VSON-6	56xv	VR19	9m	Fit
F5	-	R3118K111C	Vdet-IC	1.1V±22.5mV, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
F5	-	RP109L131D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
F5	-	XC6221B3617R	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
F5	-	XC6223H15B9R-G	LVR-IC	LDO, 1.55V±20mV, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
F53	-	XC61GC5502HR	Vdet-IC	5.5V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
f6	-	FP6121-IVSP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	VSON-6	56xv	VR19	9m	Fit
F6	-	PDTA115EM	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k	SOT-883	22ta	-	2b	Nxp
F6	-	R3118K121C	Vdet-IC	1.2V±22.5mV, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
F6	-	RP109L141D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
F6	-	XC6221B3717R	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
F6	-	XC6223H16B9R-G	LVR-IC	LDO, 1.65V±20mV, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
F63	-	XC61GC5602HR	Vdet-IC	5.6V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
f7	-	FP6121-JVSP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 150mA, +CE	VSON-6	56xv	VR19	9m	Fit
F7	-	PDTA123EM	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k	SOT-883	22ta	-	2b	Nxp
F7	-	R3118K131C	Vdet-IC	1.3V±22.5mV, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
F7	-	RP109L151D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
F7	-	XC6221B3817R	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
F7	-	XC6223H17B9R-G	LVR-IC	LDO, 1.75V±20mV, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
F73	-	XC61GC5702HR	Vdet-IC	5.7V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
f8	-	FP6121-KVSP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 150mA, +CE	VSON-6	56xv	VR19	9m	Fit
F8	-	PDTA144WM	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=47k/22k	SOT-883	22ta	-	2b	Nxp
F8	-	R3118K141C	Vdet-IC	1.4V±22.5mV, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
F8	-	RP109L161D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
F8	-	XC6221B3917R	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
F8	-	XC6223H18B9R-G	LVR-IC	LDO, 1.85V±20mV, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
F83	-	XC61GC5802HR	Vdet-IC	5.8V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
f9	-	FP6121-MVSP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 150mA, +CE	VSON-6	56xv	VR19	9m	Fit
F9	-	LM4928TL	Lin-IC	AF PA, BTL, 2.4..5.5V, 1.2W(5V/8Ω), shutdown	BGA-16	39	-	9a	Nsc
F9	-	PDTA144TM	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=47k	SOT-883	22ta	-	2b	Nxp
F9	-	R3118K151C	Vdet-IC	1.5V±22.5mV, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
F9	-	RP109L171D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
F9	-	XC6221B4017R	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
F9	-	XC6223H19B9R-G	LVR-IC	LDO, 1.95V±20mV, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
F93	-	XC61GC5902HR	Vdet-IC	5.9V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
FA	-	GDZ6.2	Z-diode	5.86..6.53V, Izt=5.0mA, 100mW	GMD2	13d	-	2w	Rhm
FA	-	PDTA123TM	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1=2.2k	SOT-883	22ta	-	2a	Nxp

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FA	-	R3114K071C	Vdet-IC	0.7V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FA	-	R3134K10EC	Vdet-IC	1.0V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FA	-	XC6223H20B9R-G	LVR-IC	LDO, 2.05V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FA	-	XC9245A38C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
FA0	-	XC6225A362GR-G	LVR-IC	LDO, 3.6V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FA096	mk	XC9215A096D	DC-DC-IC	PWM st-dwn, 0.9V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA09C	mk	XC9215A09CD	DC-DC-IC	PWM st-dwn, 0.9V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA1	-	XC6225A372GR-G	LVR-IC	LDO, 3.7V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FA106	mk	XC9215A106D	DC-DC-IC	PWM st-dwn, 1.0V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA10C	mk	XC9215A10CD	DC-DC-IC	PWM st-dwn, 1.0V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA116	mk	XC9215A116D	DC-DC-IC	PWM st-dwn, 1.1V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA11C	mk	XC9215A11CD	DC-DC-IC	PWM st-dwn, 1.1V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA11G	-	AIC1747-11GDA	LVR-IC	LDO, 1.1V±2%, 300mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FA126	mk	XC9215A126D	DC-DC-IC	PWM st-dwn, 1.2V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA12C	mk	XC9215A12CD	DC-DC-IC	PWM st-dwn, 1.2V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA12G	-	AIC1747-12GDA	LVR-IC	LDO, 1.2V±2%, 300mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FA136	mk	XC9215A136D	DC-DC-IC	PWM st-dwn, 1.3V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA13C	mk	XC9215A13CD	DC-DC-IC	PWM st-dwn, 1.3V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA13G	-	AIC1747-13GDA	LVR-IC	LDO, 1.3V±2%, 300mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FA146	mk	XC9215A146D	DC-DC-IC	PWM st-dwn, 1.4V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA14C	mk	XC9215A14CD	DC-DC-IC	PWM st-dwn, 1.4V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA156	mk	XC9215A156D	DC-DC-IC	PWM st-dwn, 1.5V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA15C	mk	XC9215A15CD	DC-DC-IC	PWM st-dwn, 1.5V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA15G	-	AIC1747-15GDA	LVR-IC	LDO, 1.5V±2%, 300mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FA166	mk	XC9215A166D	DC-DC-IC	PWM st-dwn, 1.6V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA16C	mk	XC9215A16CD	DC-DC-IC	PWM st-dwn, 1.6V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA176	mk	XC9215A176D	DC-DC-IC	PWM st-dwn, 1.7V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA17C	mk	XC9215A17CD	DC-DC-IC	PWM st-dwn, 1.7V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA186	mk	XC9215A186D	DC-DC-IC	PWM st-dwn, 1.8V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA18C	mk	XC9215A18CD	DC-DC-IC	PWM st-dwn, 1.8V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA18G	-	AIC1747-18GDA	LVR-IC	LDO, 1.8V±2%, 300mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FA196	mk	XC9215A196D	DC-DC-IC	PWM st-dwn, 1.9V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA19C	mk	XC9215A19CD	DC-DC-IC	PWM st-dwn, 1.9V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA2	-	XC6225A382GR-G	LVR-IC	LDO, 3.8V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FA206	mk	XC9215A206D	DC-DC-IC	PWM st-dwn, 2.0V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA20C	mk	XC9215A20CD	DC-DC-IC	PWM st-dwn, 2.0V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA20G	-	AIC1747-20GDA	LVR-IC	LDO, 2.0V±2%, 300mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FA216	mk	XC9215A216D	DC-DC-IC	PWM st-dwn, 2.1V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA21C	mk	XC9215A21CD	DC-DC-IC	PWM st-dwn, 2.1V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA226	mk	XC9215A226D	DC-DC-IC	PWM st-dwn, 2.2V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA22C	mk	XC9215A22CD	DC-DC-IC	PWM st-dwn, 2.2V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA236	mk	XC9215A236D	DC-DC-IC	PWM st-dwn, 2.3V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA23C	mk	XC9215A23CD	DC-DC-IC	PWM st-dwn, 2.3V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA246	mk	XC9215A246D	DC-DC-IC	PWM st-dwn, 2.4V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA24C	mk	XC9215A24CD	DC-DC-IC	PWM st-dwn, 2.4V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA256	mk	XC9215A256D	DC-DC-IC	PWM st-dwn, 2.5V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA25C	mk	XC9215A25CD	DC-DC-IC	PWM st-dwn, 2.5V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA25G	-	AIC1747-25GDA	LVR-IC	LDO, 2.5V±2%, 300mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FA266	mk	XC9215A266D	DC-DC-IC	PWM st-dwn, 2.6V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA26C	mk	XC9215A26CD	DC-DC-IC	PWM st-dwn, 2.6V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA276	mk	XC9215A276D	DC-DC-IC	PWM st-dwn, 2.7V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA27C	mk	XC9215A27CD	DC-DC-IC	PWM st-dwn, 2.7V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA27G	-	AIC1747-27GDA	LVR-IC	LDO, 2.7V±2%, 300mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FA286	mk	XC9215A286D	DC-DC-IC	PWM st-dwn, 2.8V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA28C	mk	XC9215A28CD	DC-DC-IC	PWM st-dwn, 2.8V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA296	mk	XC9215A296D	DC-DC-IC	PWM st-dwn, 2.9V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA29C	mk	XC9215A29CD	DC-DC-IC	PWM st-dwn, 2.9V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA2JG	-	AIC1747-285GDA	LVR-IC	LDO, 2.85V±2%, 300mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FA3	-	XC6225A392GR-G	LVR-IC	LDO, 3.9V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FA306	mk	XC9215A306D	DC-DC-IC	PWM st-dwn, 3.0V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA30C	mk	XC9215A30CD	DC-DC-IC	PWM st-dwn, 3.0V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA30G	-	AIC1747-30GDA	LVR-IC	LDO, 3.0V±2%, 300mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FA316	mk	XC9215A316D	DC-DC-IC	PWM st-dwn, 3.1V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA31C	mk	XC9215A31CD	DC-DC-IC	PWM st-dwn, 3.1V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA326	mk	XC9215A326D	DC-DC-IC	PWM st-dwn, 3.2V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA32C	mk	XC9215A32CD	DC-DC-IC	PWM st-dwn, 3.2V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA336	mk	XC9215A336D	DC-DC-IC	PWM st-dwn, 3.3V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA33C	mk	XC9215A33CD	DC-DC-IC	PWM st-dwn, 3.3V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA33G	-	AIC1747-33GDA	LVR-IC	LDO, 3.3V±2%, 300mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FA346	mk	XC9215A346D	DC-DC-IC	PWM st-dwn, 3.4V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FA34C	mk	XC9215A34CD	DC-DC-IC	PWM st-dwn, 3.4V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA356	mk	XC9215A356D	DC-DC-IC	PWM st-dwn, 3.5V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA35C	mk	XC9215A35CD	DC-DC-IC	PWM st-dwn, 3.5V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA35G	-	AIC1747-35GDA	LVR-IC	LDO, 3.5V±2%, 300mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FA366	mk	XC9215A366D	DC-DC-IC	PWM st-dwn, 3.6V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA36C	mk	XC9215A36CD	DC-DC-IC	PWM st-dwn, 3.6V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA376	mk	XC9215A376D	DC-DC-IC	PWM st-dwn, 3.7V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA37C	mk	XC9215A37CD	DC-DC-IC	PWM st-dwn, 3.7V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA37G	-	AIC1747-37GDA	LVR-IC	LDO, 3.7V±2%, 300mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FA386	mk	XC9215A386D	DC-DC-IC	PWM st-dwn, 3.8V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA38C	mk	XC9215A38CD	DC-DC-IC	PWM st-dwn, 3.8V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA38G	-	AIC1747-38GDA	LVR-IC	LDO, 3.8V±2%, 300mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FA396	mk	XC9215A396D	DC-DC-IC	PWM st-dwn, 3.9V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA39C	mk	XC9215A39CD	DC-DC-IC	PWM st-dwn, 3.9V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA4	-	XC6225A402GR-G	LVR-IC	LDO, 4.0V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FA406	mk	XC9215A406D	DC-DC-IC	PWM st-dwn, 4.0V±2%, 500mA, 600KHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA40C	mk	XC9215A40CD	DC-DC-IC	PWM st-dwn, 4.0V±2%, 500mA, 1.2MHz, +CE	USP-6B	49dc5	DC1	9b	Tor
FA5	-	XC6225A412GR-G	LVR-IC	LDO, 4.1V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FA6	-	XC6225A422GR-G	LVR-IC	LDO, 4.2V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FA7	-	XC6225A432GR-G	LVR-IC	LDO, 4.3V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FA8	-	XC6225A442GR-G	LVR-IC	LDO, 4.4V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FA9	-	XC6225A452GR-G	LVR-IC	LDO, 4.5V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FAA	-	XC6127C15A7R	Vdet-IC	1.5V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FAA	-	XC6225A462GR-G	LVR-IC	LDO, 4.6V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FAB	-	XC6127C15B7R	Vdet-IC	1.5V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FAB	-	XC6225A472GR-G	LVR-IC	LDO, 4.7V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FAC	-	XC6127C15C7R	Vdet-IC	1.5V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FAC	-	XC6225A482GR-G	LVR-IC	LDO, 4.8V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FAD	-	XC6127C15D7R	Vdet-IC	1.5V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FAD	-	XC6225A492GR-G	LVR-IC	LDO, 4.9V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FAE	-	XC6127C15E7R	Vdet-IC	1.5V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FAE	-	XC6225A502GR-G	LVR-IC	LDO, 5.0V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FAF	-	XC6127C15F7R	Vdet-IC	1.5V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FAH	-	XC6127C15G7R	Vdet-IC	1.5V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FAK	-	XC6127C15H7R	Vdet-IC	1.5V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FAL	-	XC6127C15J7R	Vdet-IC	1.5V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FAM	-	XC6127C15K7R	Vdet-IC	1.5V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FAN	-	XC6127C16A7R	Vdet-IC	1.6V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FAP	-	XC6127C16B7R	Vdet-IC	1.6V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FAR	-	XC6127C16C7R	Vdet-IC	1.6V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FAS	-	XC6127C16D7R	Vdet-IC	1.6V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FAT	-	XC6127C16E7R	Vdet-IC	1.6V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FAU	-	XC6127C16F7R	Vdet-IC	1.6V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FAV	-	XC6127C16G7R	Vdet-IC	1.6V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FAX	-	XC6127C16H7R	Vdet-IC	1.6V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FAY	-	XC6127C16J7R	Vdet-IC	1.6V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FAZ	-	XC6127C16K7R	Vdet-IC	1.6V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FB	-	BFR360L3	Si-npn	RF, 15V, 35mA, 210mW, 14GHz, B=90..160	TSLP-3	22te	-	2b	Inf
FB	-	PDTC123TM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=2.2k	SOT-883	22ta	-	2b	Nxp
FB	-	R3114K081C	Vdet-IC	0.8V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FB	-	R3134K11EC	Vdet-IC	1.1V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FB	-	XC6223H21B9R-G	LVR-IC	LDO, 2.15V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FB	-	XC9245A39C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
FB0	-	XC6225B362GR-G	LVR-IC	LDO, 3.6V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FB096	mk	XC9215B096D	DC-DC-IC	PWM st-dwn, 0.9V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB09C	mk	XC9215B09CD	DC-DC-IC	PWM st-dwn, 0.9V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB1	-	XC6225B372GR-G	LVR-IC	LDO, 3.7V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FB106	mk	XC9215B106D	DC-DC-IC	PWM st-dwn, 1.0V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB10C	mk	XC9215B10CD	DC-DC-IC	PWM st-dwn, 1.0V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB116	mk	XC9215B116D	DC-DC-IC	PWM st-dwn, 1.1V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB11C	mk	XC9215B11CD	DC-DC-IC	PWM st-dwn, 1.1V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB126	mk	XC9215B126D	DC-DC-IC	PWM st-dwn, 1.2V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB12C	mk	XC9215B12CD	DC-DC-IC	PWM st-dwn, 1.2V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB136	mk	XC9215B136D	DC-DC-IC	PWM st-dwn, 1.3V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB13C	mk	XC9215B13CD	DC-DC-IC	PWM st-dwn, 1.3V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB146	mk	XC9215B146D	DC-DC-IC	PWM st-dwn, 1.4V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB14C	mk	XC9215B14CD	DC-DC-IC	PWM st-dwn, 1.4V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB156	mk	XC9215B156D	DC-DC-IC	PWM st-dwn, 1.5V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB15C	mk	XC9215B15CD	DC-DC-IC	PWM st-dwn, 1.5V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB166	mk	XC9215B166D	DC-DC-IC	PWM st-dwn, 1.6V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FB16C	mk	XC9215B16CD	DC-DC-IC	PWM st-dwn, 1.6V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB176	mk	XC9215B176D	DC-DC-IC	PWM st-dwn, 1.7V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB17C	mk	XC9215B17CD	DC-DC-IC	PWM st-dwn, 1.7V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB186	mk	XC9215B186D	DC-DC-IC	PWM st-dwn, 1.8V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB18C	mk	XC9215B18CD	DC-DC-IC	PWM st-dwn, 1.8V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB196	mk	XC9215B196D	DC-DC-IC	PWM st-dwn, 1.9V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB19C	mk	XC9215B19CD	DC-DC-IC	PWM st-dwn, 1.9V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB2	-	XC6225B382GR-G	LVR-IC	LDO, 3.8V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FB206	mk	XC9215B206D	DC-DC-IC	PWM st-dwn, 2.0V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB20C	mk	XC9215B20CD	DC-DC-IC	PWM st-dwn, 2.0V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB216	mk	XC9215B216D	DC-DC-IC	PWM st-dwn, 2.1V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB21C	mk	XC9215B21CD	DC-DC-IC	PWM st-dwn, 2.1V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB226	mk	XC9215B226D	DC-DC-IC	PWM st-dwn, 2.2V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB22C	mk	XC9215B22CD	DC-DC-IC	PWM st-dwn, 2.2V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB236	mk	XC9215B236D	DC-DC-IC	PWM st-dwn, 2.3V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB23C	mk	XC9215B23CD	DC-DC-IC	PWM st-dwn, 2.3V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB246	mk	XC9215B246D	DC-DC-IC	PWM st-dwn, 2.4V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB24C	mk	XC9215B24CD	DC-DC-IC	PWM st-dwn, 2.4V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB256	mk	XC9215B256D	DC-DC-IC	PWM st-dwn, 2.5V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB25C	mk	XC9215B25CD	DC-DC-IC	PWM st-dwn, 2.5V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB266	mk	XC9215B266D	DC-DC-IC	PWM st-dwn, 2.6V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB26C	mk	XC9215B26CD	DC-DC-IC	PWM st-dwn, 2.6V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB276	mk	XC9215B276D	DC-DC-IC	PWM st-dwn, 2.7V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB27C	mk	XC9215B27CD	DC-DC-IC	PWM st-dwn, 2.7V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB286	mk	XC9215B286D	DC-DC-IC	PWM st-dwn, 2.8V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB28C	mk	XC9215B28CD	DC-DC-IC	PWM st-dwn, 2.8V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB296	mk	XC9215B296D	DC-DC-IC	PWM st-dwn, 2.9V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB29C	mk	XC9215B29CD	DC-DC-IC	PWM st-dwn, 2.9V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB3	-	XC6225B392GR-G	LVR-IC	LDO, 3.9V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FB306	mk	XC9215B306D	DC-DC-IC	PWM st-dwn, 3.0V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB30C	mk	XC9215B30CD	DC-DC-IC	PWM st-dwn, 3.0V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB316	mk	XC9215B316D	DC-DC-IC	PWM st-dwn, 3.1V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB31C	mk	XC9215B31CD	DC-DC-IC	PWM st-dwn, 3.1V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB326	mk	XC9215B326D	DC-DC-IC	PWM st-dwn, 3.2V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB32C	mk	XC9215B32CD	DC-DC-IC	PWM st-dwn, 3.2V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB336	mk	XC9215B336D	DC-DC-IC	PWM st-dwn, 3.3V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB33C	mk	XC9215B33CD	DC-DC-IC	PWM st-dwn, 3.3V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB346	mk	XC9215B346D	DC-DC-IC	PWM st-dwn, 3.4V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB34C	mk	XC9215B34CD	DC-DC-IC	PWM st-dwn, 3.4V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB356	mk	XC9215B356D	DC-DC-IC	PWM st-dwn, 3.5V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB35C	mk	XC9215B35CD	DC-DC-IC	PWM st-dwn, 3.5V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB366	mk	XC9215B366D	DC-DC-IC	PWM st-dwn, 3.6V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB36C	mk	XC9215B36CD	DC-DC-IC	PWM st-dwn, 3.6V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB376	mk	XC9215B376D	DC-DC-IC	PWM st-dwn, 3.7V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB37C	mk	XC9215B37CD	DC-DC-IC	PWM st-dwn, 3.7V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB386	mk	XC9215B386D	DC-DC-IC	PWM st-dwn, 3.8V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB38C	mk	XC9215B38CD	DC-DC-IC	PWM st-dwn, 3.8V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB396	mk	XC9215B396D	DC-DC-IC	PWM st-dwn, 3.9V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB39C	mk	XC9215B39CD	DC-DC-IC	PWM st-dwn, 3.9V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB4	-	XC6225B402GR-G	LVR-IC	LDO, 4.0V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FB406	mk	XC9215B406D	DC-DC-IC	PWM st-dwn, 4.0V±2%, 500mA, 600KHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB40C	mk	XC9215B40CD	DC-DC-IC	PWM st-dwn, 4.0V±2%, 500mA, 1.2MHz, -CE	USP-6B	49dc5	DC1	9b	Tor
FB5	-	XC6225B412GR-G	LVR-IC	LDO, 4.1V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FB6	-	XC6225B422GR-G	LVR-IC	LDO, 4.2V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FB7	-	XC6225B432GR-G	LVR-IC	LDO, 4.3V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FB8	-	XC6225B442GR-G	LVR-IC	LDO, 4.4V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FB9	-	XC6225B452GR-G	LVR-IC	LDO, 4.5V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FBA	-	XC6127C17A7R	Vdet-IC	1.7V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FBA	-	XC6225B462GR-G	LVR-IC	LDO, 4.6V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FBB	-	XC6127C17B7R	Vdet-IC	1.7V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FBB	-	XC6225B472GR-G	LVR-IC	LDO, 4.7V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FBC	-	XC6127C17C7R	Vdet-IC	1.7V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FBC	-	XC6225B482GR-G	LVR-IC	LDO, 4.8V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FBD	-	XC6127C17D7R	Vdet-IC	1.7V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FBD	-	XC6225B492GR-G	LVR-IC	LDO, 4.9V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FBE	-	XC6127C17E7R	Vdet-IC	1.7V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FBE	-	XC6225B502GR-G	LVR-IC	LDO, 5.0V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FBF	-	XC6127C17F7R	Vdet-IC	1.7V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FBH	-	XC6127C17G7R	Vdet-IC	1.7V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FBK	-	XC6127C17H7R	Vdet-IC	1.7V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FBL	-	XC6127C17J7R	Vdet-IC	1.7V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FBM	-	XC6127C17K7R	Vdet-IC	1.7V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FBN	-	XC6127C18A7R	Vdet-IC	1.8V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FBP	-	XC6127C18B7R	Vdet-IC	1.8V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FBR	-	XC6127C18C7R	Vdet-IC	1.8V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FBS	-	XC6127C18D7R	Vdet-IC	1.8V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FBT	-	XC6127C18E7R	Vdet-IC	1.8V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FBU	-	XC6127C18F7R	Vdet-IC	1.8V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FBV	-	XC6127C18G7R	Vdet-IC	1.8V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FBX	-	XC6127C18H7R	Vdet-IC	1.8V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FBY	-	XC6127C18J7R	Vdet-IC	1.8V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FBZ	-	XC6127C18K7R	Vdet-IC	1.8V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FC	-	R3114K091C	Vdet-IC	0.9V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FC	-	R3134K12EC	Vdet-IC	1.2V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FC	-	XC6223H22B9R-G	LVR-IC	LDO, 2.25V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FC	-	XC9245A40C7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
FC096	mk	XC9215C096D	DC-DC-IC	PWM st-dwn, 0.9V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC09C	mk	XC9215C09CD	DC-DC-IC	PWM st-dwn, 0.9V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC106	mk	XC9215C106D	DC-DC-IC	PWM st-dwn, 1.0V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC10C	mk	XC9215C10CD	DC-DC-IC	PWM st-dwn, 1.0V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC116	mk	XC9215C116D	DC-DC-IC	PWM st-dwn, 1.1V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC11C	mk	XC9215C11CD	DC-DC-IC	PWM st-dwn, 1.1V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC126	mk	XC9215C126D	DC-DC-IC	PWM st-dwn, 1.2V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC12C	mk	XC9215C12CD	DC-DC-IC	PWM st-dwn, 1.2V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC136	mk	XC9215C136D	DC-DC-IC	PWM st-dwn, 1.3V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC13C	mk	XC9215C13CD	DC-DC-IC	PWM st-dwn, 1.3V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC146	mk	XC9215C146D	DC-DC-IC	PWM st-dwn, 1.4V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC14C	mk	XC9215C14CD	DC-DC-IC	PWM st-dwn, 1.4V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC156	mk	XC9215C156D	DC-DC-IC	PWM st-dwn, 1.5V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC15C	mk	XC9215C15CD	DC-DC-IC	PWM st-dwn, 1.5V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC166	mk	XC9215C166D	DC-DC-IC	PWM st-dwn, 1.6V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC16C	mk	XC9215C16CD	DC-DC-IC	PWM st-dwn, 1.6V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC176	mk	XC9215C176D	DC-DC-IC	PWM st-dwn, 1.7V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC17C	mk	XC9215C17CD	DC-DC-IC	PWM st-dwn, 1.7V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC186	mk	XC9215C186D	DC-DC-IC	PWM st-dwn, 1.8V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC18C	mk	XC9215C18CD	DC-DC-IC	PWM st-dwn, 1.8V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC196	mk	XC9215C196D	DC-DC-IC	PWM st-dwn, 1.9V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC19C	mk	XC9215C19CD	DC-DC-IC	PWM st-dwn, 1.9V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC206	mk	XC9215C206D	DC-DC-IC	PWM st-dwn, 2.0V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC20C	mk	XC9215C20CD	DC-DC-IC	PWM st-dwn, 2.0V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC216	mk	XC9215C216D	DC-DC-IC	PWM st-dwn, 2.1V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC21C	mk	XC9215C21CD	DC-DC-IC	PWM st-dwn, 2.1V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC226	mk	XC9215C226D	DC-DC-IC	PWM st-dwn, 2.2V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC22C	mk	XC9215C22CD	DC-DC-IC	PWM st-dwn, 2.2V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC236	mk	XC9215C236D	DC-DC-IC	PWM st-dwn, 2.3V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC23C	mk	XC9215C23CD	DC-DC-IC	PWM st-dwn, 2.3V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC246	mk	XC9215C246D	DC-DC-IC	PWM st-dwn, 2.4V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC24C	mk	XC9215C24CD	DC-DC-IC	PWM st-dwn, 2.4V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC256	mk	XC9215C256D	DC-DC-IC	PWM st-dwn, 2.5V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC25C	mk	XC9215C25CD	DC-DC-IC	PWM st-dwn, 2.5V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC266	mk	XC9215C266D	DC-DC-IC	PWM st-dwn, 2.6V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC26C	mk	XC9215C26CD	DC-DC-IC	PWM st-dwn, 2.6V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC276	mk	XC9215C276D	DC-DC-IC	PWM st-dwn, 2.7V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC27C	mk	XC9215C27CD	DC-DC-IC	PWM st-dwn, 2.7V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC286	mk	XC9215C286D	DC-DC-IC	PWM st-dwn, 2.8V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC28C	mk	XC9215C28CD	DC-DC-IC	PWM st-dwn, 2.8V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC296	mk	XC9215C296D	DC-DC-IC	PWM st-dwn, 2.9V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC29C	mk	XC9215C29CD	DC-DC-IC	PWM st-dwn, 2.9V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC306	mk	XC9215C306D	DC-DC-IC	PWM st-dwn, 3.0V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC30C	mk	XC9215C30CD	DC-DC-IC	PWM st-dwn, 3.0V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC316	mk	XC9215C316D	DC-DC-IC	PWM st-dwn, 3.1V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC31C	mk	XC9215C31CD	DC-DC-IC	PWM st-dwn, 3.1V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC326	mk	XC9215C326D	DC-DC-IC	PWM st-dwn, 3.2V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC32C	mk	XC9215C32CD	DC-DC-IC	PWM st-dwn, 3.2V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC336	mk	XC9215C336D	DC-DC-IC	PWM st-dwn, 3.3V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC33C	mk	XC9215C33CD	DC-DC-IC	PWM st-dwn, 3.3V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC346	mk	XC9215C346D	DC-DC-IC	PWM st-dwn, 3.4V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC34C	mk	XC9215C34CD	DC-DC-IC	PWM st-dwn, 3.4V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC356	mk	XC9215C356D	DC-DC-IC	PWM st-dwn, 3.5V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC35C	mk	XC9215C35CD	DC-DC-IC	PWM st-dwn, 3.5V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FC366	mk	XC9215C366D	DC-DC-IC	PWM st-dwn, 3.6V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC36C	mk	XC9215C36CD	DC-DC-IC	PWM st-dwn, 3.6V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC376	mk	XC9215C376D	DC-DC-IC	PWM st-dwn, 3.7V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC37C	mk	XC9215C37CD	DC-DC-IC	PWM st-dwn, 3.7V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC386	mk	XC9215C386D	DC-DC-IC	PWM st-dwn, 3.8V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC38C	mk	XC9215C38CD	DC-DC-IC	PWM st-dwn, 3.8V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC396	mk	XC9215C396D	DC-DC-IC	PWM st-dwn, 3.9V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC39C	mk	XC9215C39CD	DC-DC-IC	PWM st-dwn, 3.9V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC406	mk	XC9215C406D	DC-DC-IC	PWM st-dwn, 4.0V±2%, 500mA, 600KHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FC40C	mk	XC9215C40CD	DC-DC-IC	PWM st-dwn, 4.0V±2%, 500mA, 1.2MHz, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
FCA	-	XC6127C19A7R	Vdet-IC	1.9V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FCB	-	XC6127C19B7R	Vdet-IC	1.9V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FCC	-	XC6127C19C7R	Vdet-IC	1.9V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FCD	-	XC6127C19D7R	Vdet-IC	1.9V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FCE	-	XC6127C19E7R	Vdet-IC	1.9V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FCF	-	XC6127C19F7R	Vdet-IC	1.9V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FCH	-	XC6127C19G7R	Vdet-IC	1.9V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FCK	-	XC6127C19H7R	Vdet-IC	1.9V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FCL	-	XC6127C19J7R	Vdet-IC	1.9V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FCM	-	XC6127C19K7R	Vdet-IC	1.9V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FCN	-	XC6127C20A7R	Vdet-IC	2.0V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FCP	-	XC6127C20B7R	Vdet-IC	2.0V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FCR	-	XC6127C20C7R	Vdet-IC	2.0V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FCS	-	XC6127C20D7R	Vdet-IC	2.0V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FCT	-	XC6127C20E7R	Vdet-IC	2.0V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FCU	-	XC6127C20F7R	Vdet-IC	2.0V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FCV	-	XC6127C20G7R	Vdet-IC	2.0V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FCX	-	XC6127C20H7R	Vdet-IC	2.0V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FCY	-	XC6127C20J7R	Vdet-IC	2.0V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FCZ	-	XC6127C20K7R	Vdet-IC	2.0V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FD	-	R3114K101C	Vdet-IC	1.0V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FD	-	R3134K13EC	Vdet-IC	1.3V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FD	-	RT9193-24GQW	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
FD	-	XC6223H23B9R-G	LVR-IC	LDO, 2.35V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FD	-	XC9245A3LC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
FD096	mk	XC9215D096D	DC-DC-IC	PWM st-dwn, 0.9V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD09C	mk	XC9215D09CD	DC-DC-IC	PWM st-dwn, 0.9V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD106	mk	XC9215D106D	DC-DC-IC	PWM st-dwn, 1.0V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD10C	mk	XC9215D10CD	DC-DC-IC	PWM st-dwn, 1.0V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD116	mk	XC9215D116D	DC-DC-IC	PWM st-dwn, 1.1V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD11C	mk	XC9215D11CD	DC-DC-IC	PWM st-dwn, 1.1V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD126	mk	XC9215D126D	DC-DC-IC	PWM st-dwn, 1.2V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD12C	mk	XC9215D12CD	DC-DC-IC	PWM st-dwn, 1.2V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD136	mk	XC9215D136D	DC-DC-IC	PWM st-dwn, 1.3V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD13C	mk	XC9215D13CD	DC-DC-IC	PWM st-dwn, 1.3V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD146	mk	XC9215D146D	DC-DC-IC	PWM st-dwn, 1.4V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD14C	mk	XC9215D14CD	DC-DC-IC	PWM st-dwn, 1.4V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD156	mk	XC9215D156D	DC-DC-IC	PWM st-dwn, 1.5V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD15C	mk	XC9215D15CD	DC-DC-IC	PWM st-dwn, 1.5V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD166	mk	XC9215D166D	DC-DC-IC	PWM st-dwn, 1.6V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD16C	mk	XC9215D16CD	DC-DC-IC	PWM st-dwn, 1.6V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD176	mk	XC9215D176D	DC-DC-IC	PWM st-dwn, 1.7V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD17C	mk	XC9215D17CD	DC-DC-IC	PWM st-dwn, 1.7V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD186	mk	XC9215D186D	DC-DC-IC	PWM st-dwn, 1.8V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD18C	mk	XC9215D18CD	DC-DC-IC	PWM st-dwn, 1.8V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD196	mk	XC9215D196D	DC-DC-IC	PWM st-dwn, 1.9V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD19C	mk	XC9215D19CD	DC-DC-IC	PWM st-dwn, 1.9V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD206	mk	XC9215D206D	DC-DC-IC	PWM st-dwn, 2.0V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD20C	mk	XC9215D20CD	DC-DC-IC	PWM st-dwn, 2.0V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD216	mk	XC9215D216D	DC-DC-IC	PWM st-dwn, 2.1V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD21C	mk	XC9215D21CD	DC-DC-IC	PWM st-dwn, 2.1V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD226	mk	XC9215D226D	DC-DC-IC	PWM st-dwn, 2.2V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD22C	mk	XC9215D22CD	DC-DC-IC	PWM st-dwn, 2.2V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD236	mk	XC9215D236D	DC-DC-IC	PWM st-dwn, 2.3V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD23C	mk	XC9215D23CD	DC-DC-IC	PWM st-dwn, 2.3V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD246	mk	XC9215D246D	DC-DC-IC	PWM st-dwn, 2.4V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD24C	mk	XC9215D24CD	DC-DC-IC	PWM st-dwn, 2.4V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD256	mk	XC9215D256D	DC-DC-IC	PWM st-dwn, 2.5V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD25C	mk	XC9215D25CD	DC-DC-IC	PWM st-dwn, 2.5V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD266	mk	XC9215D266D	DC-DC-IC	PWM st-dwn, 2.6V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FD26C	mk	XC9215D26CD	DC-DC-IC	PWM st-dwn, 2.6V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD276	mk	XC9215D276D	DC-DC-IC	PWM st-dwn, 2.7V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD27C	mk	XC9215D27CD	DC-DC-IC	PWM st-dwn, 2.7V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD286	mk	XC9215D286D	DC-DC-IC	PWM st-dwn, 2.8V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD28C	mk	XC9215D28CD	DC-DC-IC	PWM st-dwn, 2.8V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD296	mk	XC9215D296D	DC-DC-IC	PWM st-dwn, 2.9V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD29C	mk	XC9215D29CD	DC-DC-IC	PWM st-dwn, 2.9V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD306	mk	XC9215D306D	DC-DC-IC	PWM st-dwn, 3.0V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD30C	mk	XC9215D30CD	DC-DC-IC	PWM st-dwn, 3.0V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD316	mk	XC9215D316D	DC-DC-IC	PWM st-dwn, 3.1V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD31C	mk	XC9215D31CD	DC-DC-IC	PWM st-dwn, 3.1V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD326	mk	XC9215D326D	DC-DC-IC	PWM st-dwn, 3.2V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD32C	mk	XC9215D32CD	DC-DC-IC	PWM st-dwn, 3.2V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD336	mk	XC9215D336D	DC-DC-IC	PWM st-dwn, 3.3V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD33C	mk	XC9215D33CD	DC-DC-IC	PWM st-dwn, 3.3V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD346	mk	XC9215D346D	DC-DC-IC	PWM st-dwn, 3.4V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD34C	mk	XC9215D34CD	DC-DC-IC	PWM st-dwn, 3.4V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD356	mk	XC9215D356D	DC-DC-IC	PWM st-dwn, 3.5V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD35C	mk	XC9215D35CD	DC-DC-IC	PWM st-dwn, 3.5V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD366	mk	XC9215D366D	DC-DC-IC	PWM st-dwn, 3.6V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD36C	mk	XC9215D36CD	DC-DC-IC	PWM st-dwn, 3.6V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD376	mk	XC9215D376D	DC-DC-IC	PWM st-dwn, 3.7V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD37C	mk	XC9215D37CD	DC-DC-IC	PWM st-dwn, 3.7V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD386	mk	XC9215D386D	DC-DC-IC	PWM st-dwn, 3.8V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD38C	mk	XC9215D38CD	DC-DC-IC	PWM st-dwn, 3.8V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD396	mk	XC9215D396D	DC-DC-IC	PWM st-dwn, 3.9V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD39C	mk	XC9215D39CD	DC-DC-IC	PWM st-dwn, 3.9V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD406	mk	XC9215D406D	DC-DC-IC	PWM st-dwn, 4.0V±2%, 500mA, 600KHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FD40C	mk	XC9215D40CD	DC-DC-IC	PWM st-dwn, 4.0V±2%, 500mA, 1.2MHz, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
FDA	-	XC6127C21A7R	Vdet-IC	2.1V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FDB	-	XC6127C21B7R	Vdet-IC	2.1V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FDC	-	XC6127C21C7R	Vdet-IC	2.1V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FDD	-	XC6127C21D7R	Vdet-IC	2.1V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FDE	-	XC6127C21E7R	Vdet-IC	2.1V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FDF	-	XC6127C21F7R	Vdet-IC	2.1V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FDH	-	XC6127C21G7R	Vdet-IC	2.1V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FDK	-	XC6127C21H7R	Vdet-IC	2.1V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FDL	-	XC6127C21J7R	Vdet-IC	2.1V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FDM	-	XC6127C21K7R	Vdet-IC	2.1V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FDN	-	XC6127C22A7R	Vdet-IC	2.2V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FDP	-	XC6127C22B7R	Vdet-IC	2.2V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FDR	-	XC6127C22C7R	Vdet-IC	2.2V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FDS	-	XC6127C22D7R	Vdet-IC	2.2V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FDT	-	XC6127C22E7R	Vdet-IC	2.2V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FDU	-	XC6127C22F7R	Vdet-IC	2.2V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FDV	-	XC6127C22G7R	Vdet-IC	2.2V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FDX	-	XC6127C22H7R	Vdet-IC	2.2V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FDY	-	XC6127C22J7R	Vdet-IC	2.2V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FDZ	-	XC6127C22K7R	Vdet-IC	2.2V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FE	-	R3114K111C	Vdet-IC	1.1V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FE	-	R3134K14EC	Vdet-IC	1.4V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FE	-	XC6223H24B9R-G	LVR-IC	LDO, 2.45V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FE	-	XC9245A3MC7R-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±2.0%, 400mA, +CE	USPN-6	52y5	DC20	9a	Tor
FE2	-	XC6225A08AGR-G	LVR-IC	LDO, 0.85V±30mV, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FE3	-	XC6225A09AGR-G	LVR-IC	LDO, 0.95V±30mV, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FE4	-	XC6225A10AGR-G	LVR-IC	LDO, 1.05V±30mV, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FE5	-	XC6225A11AGR-G	LVR-IC	LDO, 1.15V±30mV, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FE6	-	XC6225A12AGR-G	LVR-IC	LDO, 1.25V±30mV, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FE7	-	XC6225A13AGR-G	LVR-IC	LDO, 1.35V±30mV, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FE8	-	XC6225A14AGR-G	LVR-IC	LDO, 1.45V±30mV, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FE9	-	XC6225A15AGR-G	LVR-IC	LDO, 1.55V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FEA	-	XC6127C23A7R	Vdet-IC	2.3V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FEA	-	XC6225A16AGR-G	LVR-IC	LDO, 1.65V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FEB	-	XC6127C23B7R	Vdet-IC	2.3V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FEB	-	XC6225A17AGR-G	LVR-IC	LDO, 1.75V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FEC	-	XC6127C23C7R	Vdet-IC	2.3V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FEC	-	XC6225A18AGR-G	LVR-IC	LDO, 1.85V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FED	-	XC6127C23D7R	Vdet-IC	2.3V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FED	-	XC6225A19AGR-G	LVR-IC	LDO, 1.95V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FEE	-	XC6127C23E7R	Vdet-IC	2.3V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FEE	-	XC6225A20AGR-G	LVR-IC	LDO, 2.05V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FEF	-	XC6127C23F7R	Vdet-IC	2.3V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FEF	-	XC6225A21AGR-G	LVR-IC	LDO, 2.15V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FEH	-	XC6127C23G7R	Vdet-IC	2.3V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FEH	-	XC6225A22AGR-G	LVR-IC	LDO, 2.25V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FEK	-	XC6127C23H7R	Vdet-IC	2.3V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FEK	-	XC6225A23AGR-G	LVR-IC	LDO, 2.35V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FEL	-	XC6127C23J7R	Vdet-IC	2.3V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FEL	-	XC6225A24AGR-G	LVR-IC	LDO, 2.45V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FEM	-	XC6127C23K7R	Vdet-IC	2.3V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FEM	-	XC6225A25AGR-G	LVR-IC	LDO, 2.55V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FEN	-	XC6127C24A7R	Vdet-IC	2.4V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FEN	-	XC6225A26AGR-G	LVR-IC	LDO, 2.65V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FEP	-	XC6127C24B7R	Vdet-IC	2.4V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FEP	-	XC6225A27AGR-G	LVR-IC	LDO, 2.75V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FER	-	XC6127C24C7R	Vdet-IC	2.4V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FER	-	XC6225A28AGR-G	LVR-IC	LDO, 2.85V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FES	-	XC6127C24D7R	Vdet-IC	2.4V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FES	-	XC6225A29AGR-G	LVR-IC	LDO, 2.95V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FET	-	XC6127C24E7R	Vdet-IC	2.4V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FET	-	XC6225A30AGR-G	LVR-IC	LDO, 3.05V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FEU	-	XC6127C24F7R	Vdet-IC	2.4V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FEU	-	XC6225A31AGR-G	LVR-IC	LDO, 3.15V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FEV	-	XC6127C24G7R	Vdet-IC	2.4V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FEV	-	XC6225A32AGR-G	LVR-IC	LDO, 3.25V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FEX	-	XC6127C24H7R	Vdet-IC	2.4V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FEX	-	XC6225A33AGR-G	LVR-IC	LDO, 3.35V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FEY	-	XC6127C24J7R	Vdet-IC	2.4V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FEY	-	XC6225A34AGR-G	LVR-IC	LDO, 3.45V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FEZ	-	XC6127C24K7R	Vdet-IC	2.4V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FEZ	-	XC6225A35AGR-G	LVR-IC	LDO, 3.55V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FF	-	BAS40-02L	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	TSLP-2-1	13d	-	2b	Inf
FF	-	R3114K121C	Vdet-IC	1.2V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FF	-	R3134K15EC	Vdet-IC	1.5V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FF	-	XC6223H25B9R-G	LVR-IC	LDO, 2.55V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FF2	-	XC6225B08AGR-G	LVR-IC	LDO, 0.85V±30mV, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FF3	-	XC6225B09AGR-G	LVR-IC	LDO, 0.95V±30mV, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FF4	-	XC6225B10AGR-G	LVR-IC	LDO, 1.05V±30mV, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FF5	-	XC6225B11AGR-G	LVR-IC	LDO, 1.15V±30mV, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FF6	-	XC6225B12AGR-G	LVR-IC	LDO, 1.25V±30mV, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FF7	-	XC6225B13AGR-G	LVR-IC	LDO, 1.35V±30mV, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FF8	-	XC6225B14AGR-G	LVR-IC	LDO, 1.45V±30mV, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FF8	-	XCL201B081BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 0.8V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FF9	-	XC6225B15AGR-G	LVR-IC	LDO, 1.55V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FF9	-	XCL201B091BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 0.9V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FFA	-	XC6127C25A7R	Vdet-IC	2.5V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FFA	-	XC6225B16AGR-G	LVR-IC	LDO, 1.65V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFB	-	XC6127C25B7R	Vdet-IC	2.5V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FFB	-	XC6225B17AGR-G	LVR-IC	LDO, 1.75V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFC	-	XC6127C25C7R	Vdet-IC	2.5V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FFC	-	XC6225B192GR-G	LVR-IC	LDO, 1.9V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFD	-	XC6127C25D7R	Vdet-IC	2.5V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FFD	-	XC6225B19AGR-G	LVR-IC	LDO, 1.95V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFE	-	XC6127C25E7R	Vdet-IC	2.5V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FFE	-	XC6225B20AGR-G	LVR-IC	LDO, 2.05V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFF	-	XC6127C25F7R	Vdet-IC	2.5V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FFF	-	XC6225B21AGR-G	LVR-IC	LDO, 2.15V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFH	-	XC6127C25G7R	Vdet-IC	2.5V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FFH	-	XC6225B22AGR-G	LVR-IC	LDO, 2.25V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFK	-	XC6127C25H7R	Vdet-IC	2.5V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FFK	-	XC6225B23AGR-G	LVR-IC	LDO, 2.35V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFL	-	XC6127C25J7R	Vdet-IC	2.5V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FFL	-	XC6225B24AGR-G	LVR-IC	LDO, 2.45V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFL	-	XCL201B0L1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 0.85V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FFM	-	XC6127C25K7R	Vdet-IC	2.5V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FFM	-	XC6225B25AGR-G	LVR-IC	LDO, 2.55V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFM	-	XCL201B0M1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 0.95V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FFN	-	XC6127C26A7R	Vdet-IC	2.6V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FFN	-	XC6225B26AGR-G	LVR-IC	LDO, 2.65V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFP	-	XC6127C26B7R	Vdet-IC	2.6V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FFP	-	XC6225B27AGR-G	LVR-IC	LDO, 2.75V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFR	-	XC6127C26C7R	Vdet-IC	2.6V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FFR	-	XC6225B28AGR-G	LVR-IC	LDO, 2.85V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFS	-	XC6127C26D7R	Vdet-IC	2.6V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FFS	-	XC6225B29AGR-G	LVR-IC	LDO, 2.95V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFT	-	XC6127C26E7R	Vdet-IC	2.6V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FFT	-	XC6225B30AGR-G	LVR-IC	LDO, 3.05V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFU	-	XC6127C26F7R	Vdet-IC	2.6V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FFU	-	XC6225B31AGR-G	LVR-IC	LDO, 3.15V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFV	-	XC6127C26G7R	Vdet-IC	2.6V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FFV	-	XC6225B32AGR-G	LVR-IC	LDO, 3.25V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFX	-	XC6127C26H7R	Vdet-IC	2.6V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FFX	-	XC6225B33AGR-G	LVR-IC	LDO, 3.35V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFY	-	XC6127C26J7R	Vdet-IC	2.6V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FFY	-	XC6225B34AGR-G	LVR-IC	LDO, 3.45V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FFZ	-	XC6127C26K7R	Vdet-IC	2.6V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FFZ	-	XC6225B35AGR-G	LVR-IC	LDO, 3.55V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FG	-	MIC2211-1.5/1.8BML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(150mA)/1.8V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
FG	-	R3114K131C	Vdet-IC	1.3V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FG	-	R3134K16EC	Vdet-IC	1.6V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FH	-	R3114K141C	Vdet-IC	1.4V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FH	-	R3134K17EC	Vdet-IC	1.7V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FH	-	XC6223H26B9R-G	LVR-IC	LDO, 2.65V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FH0	-	XCL201B101BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.0V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FH1	-	XCL201B111BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.1V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FH2	-	XCL201B121BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.2V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FH3	-	XCL201B131BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.3V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FH4	-	XCL201B141BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.4V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FH5	-	XCL201B151BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.5V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FH6	-	XCL201B161BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.6V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FH7	-	XCL201B171BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.7V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FH8	-	XCL201B181BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.8V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FH9	-	XCL201B191BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.9V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FHA	-	XC6127C27A7R	Vdet-IC	2.7V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FHA	-	XCL201B1A1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.05V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FHB	-	XC6127C27B7R	Vdet-IC	2.7V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FHB	-	XCL201B1B1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.15V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FHC	-	XC6127C27C7R	Vdet-IC	2.7V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FHC	-	XCL201B1C1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.25V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FHD	-	XC6127C27D7R	Vdet-IC	2.7V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FHD	-	XCL201B1D1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.35V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FHE	-	XC6127C27E7R	Vdet-IC	2.7V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FHE	-	XCL201B1E1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.45V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FHF	-	XC6127C27F7R	Vdet-IC	2.7V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FHF	-	XCL201B1F1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.55V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FHH	-	XC6127C27G7R	Vdet-IC	2.7V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FHH	-	XCL201B1H1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.65V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FHK	-	XC6127C27H7R	Vdet-IC	2.7V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FHK	-	XCL201B1K1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.75V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FHL	-	XC6127C27J7R	Vdet-IC	2.7V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FHL	-	XCL201B1L1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.85V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FHM	-	XC6127C27K7R	Vdet-IC	2.7V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FHM	-	XCL201B1M1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 1.95V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FHN	-	XC6127C28A7R	Vdet-IC	2.8V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FHP	-	XC6127C28B7R	Vdet-IC	2.8V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FHR	-	XC6127C28C7R	Vdet-IC	2.8V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FHS	-	XC6127C28D7R	Vdet-IC	2.8V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FHT	-	XC6127C28E7R	Vdet-IC	2.8V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FHU	-	XC6127C28F7R	Vdet-IC	2.8V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FHV	-	XC6127C28G7R	Vdet-IC	2.8V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FHX	-	XC6127C28H7R	Vdet-IC	2.8V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FHY	-	XC6127C28J7R	Vdet-IC	2.8V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FHZ	-	XC6127C28K7R	Vdet-IC	2.8V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FJ	-	R3114K151C	Vdet-IC	1.5V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FJ	-	R3134K18EC	Vdet-IC	1.8V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FJ	-	RT9193-2HGQW	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
FJ11G	-	AIC1746-11GDA	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FJ12G	-	AIC1746-12GDA	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FJ13G	-	AIC1746-13GDA	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FJ15G	-	AIC1746-15GDA	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	DFN-6L	56ub	VR7	9c	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FJ18G	-	AIC1746-18GDA	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FJ20G	-	AIC1746-20GDA	LVR-IC	LDO, 2.0V±2%, 150mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FJ25G	-	AIC1746-25GDA	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FJ27G	-	AIC1746-27GDA	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FJ2JG	-	AIC1746-285GDA	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FJ30G	-	AIC1746-30GDA	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FJ33G	-	AIC1746-33GDA	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FJ35G	-	AIC1746-35GDA	LVR-IC	LDO, 3.5V±2%, 150mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FJ37G	-	AIC1746-37GDA	LVR-IC	LDO, 3.7V±2%, 150mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FJ38G	-	AIC1746-38GDA	LVR-IC	LDO, 3.8V±2%, 150mA, +CE	DFN-6L	56ub	VR7	9c	Aic
FK	-	R3114K161C	Vdet-IC	1.6V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FK	-	R3134K19EC	Vdet-IC	1.9V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FK	-	XC6223H27B9R-G	LVR-IC	LDO, 2.75V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FK0	-	XCL201B201BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.0V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FK1	-	XCL201B211BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.1V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FK2	-	XCL201B221BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.2V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FK3	-	XCL201B231BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.3V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FK4	-	XCL201B241BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.4V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FK5	-	XCL201B251BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.5V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FK6	-	XCL201B261BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.6V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FK7	-	XCL201B271BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.7V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FK8	-	XCL201B281BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.8V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FK9	-	XCL201B291BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.9V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FKA	-	XC6127C29A7R	Vdet-IC	2.9V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FKA	-	XCL201B2A1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.05V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FKB	-	XC6127C29B7R	Vdet-IC	2.9V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FKB	-	XCL201B2B1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.15V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FKC	-	XC6127C29C7R	Vdet-IC	2.9V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FKC	-	XCL201B2C1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.25V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FKD	-	XC6127C29D7R	Vdet-IC	2.9V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FKD	-	XCL201B2D1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.35V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FKE	-	XC6127C29E7R	Vdet-IC	2.9V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FKE	-	XCL201B2E1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.45V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FKF	-	XC6127C29F7R	Vdet-IC	2.9V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FKF	-	XCL201B2F1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.55V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FKH	-	XC6127C29G7R	Vdet-IC	2.9V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FKH	-	XCL201B2H1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.65V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FKK	-	XC6127C29H7R	Vdet-IC	2.9V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FKK	-	XCL201B2K1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.75V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FKL	-	XC6127C29J7R	Vdet-IC	2.9V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FKL	-	XCL201B2L1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.85V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FKM	-	XC6127C29K7R	Vdet-IC	2.9V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FKM	-	XCL201B2M1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 2.95V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FKN	-	XC6127C30A7R	Vdet-IC	3.0V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FKP	-	XC6127C30B7R	Vdet-IC	3.0V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FKR	-	XC6127C30C7R	Vdet-IC	3.0V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FKS	-	XC6127C30D7R	Vdet-IC	3.0V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FKT	-	XC6127C30E7R	Vdet-IC	3.0V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FKU	-	XC6127C30F7R	Vdet-IC	3.0V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FKV	-	XC6127C30G7R	Vdet-IC	3.0V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FKX	-	XC6127C30H7R	Vdet-IC	3.0V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FKY	-	XC6127C30J7R	Vdet-IC	3.0V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FKZ	-	XC6127C30K7R	Vdet-IC	3.0V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
fl	-	BU2AUA3WNVX	LVR-IC	LDO, 2.05V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
FL	-	R3114K171C	Vdet-IC	1.7V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FL	-	R3134K20EC	Vdet-IC	2.0V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FL	-	RT9101ZQW	Lin-IC	AF PA, BTL, class-D, 2.5..6V, 2.65W(5V/4Ω), shutdown	DFN-8	92	-	9a	Rct
FL	-	XC6223H28B9R-G	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FL=	-	RT9101GQW	Lin-IC	AF PA, BTL, class-D, 2.5..6V, 2.65W(5V/4Ω), shutdown	DFN-8	92	-	9a	Rct
FL0	-	XC6225A36AGR-G	LVR-IC	LDO, 3.65V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FL0	-	XCL201B301BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FL1	-	XC6225A37AGR-G	LVR-IC	LDO, 3.75V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FL1	-	XCL201B311BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FL2	-	XC6225A38AGR-G	LVR-IC	LDO, 3.85V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FL2	-	XCL201B321BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FL3	-	XC6225A39AGR-G	LVR-IC	LDO, 3.95V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FL3	-	XCL201B331BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FL4	-	XC6225A40AGR-G	LVR-IC	LDO, 4.05V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FL4	-	XCL201B341BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FL5	-	XC6225A41AGR-G	LVR-IC	LDO, 4.15V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FL5	-	XCL201B351BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FL6	-	XC6225A42AGR-G	LVR-IC	LDO, 4.25V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FL6	-	XCL201B361BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FL7	-	XC6225A43AGR-G	LVR-IC	LDO, 4.35V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FL7	-	XCL201B371BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FL8	-	XC6225A44AGR-G	LVR-IC	LDO, 4.45V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FL8	-	XCL201B381BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FL9	-	XC6225A45AGR-G	LVR-IC	LDO, 4.55V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FL9	-	XCL201B391BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FLA	-	XC6127C31A7R	Vdet-IC	3.1V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FLA	-	XC6225A46AGR-G	LVR-IC	LDO, 4.65V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FLA	-	XCL201B3A1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FLB	-	XC6127C31B7R	Vdet-IC	3.1V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FLB	-	XC6225A47AGR-G	LVR-IC	LDO, 4.75V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FLB	-	XCL201B3B1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FLC	-	XC6127C31C7R	Vdet-IC	3.1V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FLC	-	XC6225A48AGR-G	LVR-IC	LDO, 4.85V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FLC	-	XCL201B3C1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FLD	-	XC6127C31D7R	Vdet-IC	3.1V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FLD	-	XC6225A49AGR-G	LVR-IC	LDO, 4.95V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FLD	-	XCL201B3D1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FLE	-	XC6127C31E7R	Vdet-IC	3.1V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FLE	-	XCL201B3E1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FLF	-	XC6127C31F7R	Vdet-IC	3.1V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FLF	-	XCL201B3F1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FLH	-	XC6127C31G7R	Vdet-IC	3.1V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FLH	-	XCL201B3H1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FLK	-	XC6127C31H7R	Vdet-IC	3.1V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FLK	-	XCL201B3K1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FLL	-	XC6127C31J7R	Vdet-IC	3.1V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FLL	-	XCL201B3L1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FLM	-	XC6127C31K7R	Vdet-IC	3.1V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FLM	-	XCL201B3M1BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FLN	-	XC6127C32A7R	Vdet-IC	3.2V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FLP	-	XC6127C32B7R	Vdet-IC	3.2V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FLR	-	XC6127C32C7R	Vdet-IC	3.2V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FLS	-	XC6127C32D7R	Vdet-IC	3.2V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FLT	-	XC6127C32E7R	Vdet-IC	3.2V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FLU	-	XC6127C32F7R	Vdet-IC	3.2V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FLV	-	XC6127C32G7R	Vdet-IC	3.2V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FLX	-	XC6127C32H7R	Vdet-IC	3.2V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FLY	-	XC6127C32J7R	Vdet-IC	3.2V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FLZ	-	XC6127C32K7R	Vdet-IC	3.2V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
fM	-	XC7SH125GF	CMOS-Log	Bus buffer gate with 3-state output	SOT891	52	Log14	9z	Nxp
fM	-	XC7SH125GM	CMOS-Log	Bus buffer gate with 3-state output	SOT886	57	Log14	9z	Nxp
FM	-	MIC2211-1.5/2.8BML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(150mA)/2.8V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
FM	-	R3114K181C	Vdet-IC	1.8V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FM	-	R3134K21EC	Vdet-IC	2.1V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FM	-	XC6223H29B9R-G	LVR-IC	LDO, 2.95V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FM0	-	XC6225B36AGR-G	LVR-IC	LDO, 3.65V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FM0	-	XCL201B401BR-G	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
FM1	-	XC6225B37AGR-G	LVR-IC	LDO, 3.75V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FM2	-	XC6225B38AGR-G	LVR-IC	LDO, 3.85V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FM3	-	XC6225B39AGR-G	LVR-IC	LDO, 3.95V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FM4	-	XC6225B40AGR-G	LVR-IC	LDO, 4.05V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FM5	-	XC6225B41AGR-G	LVR-IC	LDO, 4.15V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FM6	-	XC6225B42AGR-G	LVR-IC	LDO, 4.25V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FM7	-	XC6225B43AGR-G	LVR-IC	LDO, 4.35V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FM8	-	XC6225B44AGR-G	LVR-IC	LDO, 4.45V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FM9	-	XC6225B45AGR-G	LVR-IC	LDO, 4.55V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FMA	-	XC6127C33A7R	Vdet-IC	3.3V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FMA	-	XC6225B46AGR-G	LVR-IC	LDO, 4.65V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FMB	-	XC6127C33B7R	Vdet-IC	3.3V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FMB	-	XC6225B47AGR-G	LVR-IC	LDO, 4.75V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FMC	-	XC6127C33C7R	Vdet-IC	3.3V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FMC	-	XC6225B48AGR-G	LVR-IC	LDO, 4.85V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FMD	-	XC6127C33D7R	Vdet-IC	3.3V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FMD	-	XC6225B49AGR-G	LVR-IC	LDO, 4.95V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FME	-	XC6127C33E7R	Vdet-IC	3.3V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FMF	-	XC6127C33F7R	Vdet-IC	3.3V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FMH	-	XC6127C33G7R	Vdet-IC	3.3V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FMK	-	XC6127C33H7R	Vdet-IC	3.3V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FML	-	XC6127C33J7R	Vdet-IC	3.3V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FMM	-	XC6127C33K7R	Vdet-IC	3.3V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FMN	-	XC6127C34A7R	Vdet-IC	3.4V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FMP	-	XC6127C34B7R	Vdet-IC	3.4V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FMR	-	XC6127C34C7R	Vdet-IC	3.4V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FMS	-	XC6127C34D7R	Vdet-IC	3.4V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FMT	-	XC6127C34E7R	Vdet-IC	3.4V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FMU	-	XC6127C34F7R	Vdet-IC	3.4V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FMV	-	XC6127C34G7R	Vdet-IC	3.4V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FMX	-	XC6127C34H7R	Vdet-IC	3.4V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FMY	-	XC6127C34J7R	Vdet-IC	3.4V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FMZ	-	XC6127C34K7R	Vdet-IC	3.4V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FN	-	MIC2211-1.5/2.85BML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(150mA)/2.85V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
FN	-	R3114K191C	Vdet-IC	1.9V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FN	-	R3134K22EC	Vdet-IC	2.2V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FN	-	XC6223H30B9R-G	LVR-IC	LDO, 3.05V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FNA	-	XC6127C35A7R	Vdet-IC	3.5V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FNB	-	XC6127C35B7R	Vdet-IC	3.5V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FNC	-	XC6127C35C7R	Vdet-IC	3.5V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FND	-	XC6127C35D7R	Vdet-IC	3.5V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FNE	-	XC6127C35E7R	Vdet-IC	3.5V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FNF	-	XC6127C35F7R	Vdet-IC	3.5V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FNH	-	XC6127C35G7R	Vdet-IC	3.5V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FNK	-	XC6127C35H7R	Vdet-IC	3.5V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FNL	-	XC6127C35J7R	Vdet-IC	3.5V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FNM	-	XC6127C35K7R	Vdet-IC	3.5V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FNN	-	XC6127C36A7R	Vdet-IC	3.6V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FNP	-	XC6127C36B7R	Vdet-IC	3.6V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FNR	-	XC6127C36C7R	Vdet-IC	3.6V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FNS	-	XC6127C36D7R	Vdet-IC	3.6V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FNT	-	XC6127C36E7R	Vdet-IC	3.6V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FNU	-	XC6127C36F7R	Vdet-IC	3.6V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FNV	-	XC6127C36G7R	Vdet-IC	3.6V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FNX	-	XC6127C36H7R	Vdet-IC	3.6V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FNY	-	XC6127C36J7R	Vdet-IC	3.6V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FNZ	-	XC6127C36K7R	Vdet-IC	3.6V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FO	-	MIC2211-1.5/2.9BML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(150mA)/2.9V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
FP	-	FP6121-NVSP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	VSON-6	56xv	VR19	9m	Fit
FP	-	R3114K201C	Vdet-IC	2.0V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FP	-	R3134K23EC	Vdet-IC	2.3V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FP	-	XC6223H31B9R-G	LVR-IC	LDO, 3.15V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FPA	-	XC6127C37A7R	Vdet-IC	3.7V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FPB	-	XC6127C37B7R	Vdet-IC	3.7V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FPC	-	XC6127C37C7R	Vdet-IC	3.7V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FPD	-	XC6127C37D7R	Vdet-IC	3.7V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FPE	-	XC6127C37E7R	Vdet-IC	3.7V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FPF	-	XC6127C37F7R	Vdet-IC	3.7V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FPH	-	XC6127C37G7R	Vdet-IC	3.7V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FPK	-	XC6127C37H7R	Vdet-IC	3.7V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FPL	-	XC6127C37J7R	Vdet-IC	3.7V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FPM	-	XC6127C37K7R	Vdet-IC	3.7V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FPN	-	XC6127C38A7R	Vdet-IC	3.8V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FPP	-	XC6127C38B7R	Vdet-IC	3.8V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FPR	-	XC6127C38C7R	Vdet-IC	3.8V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FPS	-	XC6127C38D7R	Vdet-IC	3.8V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FPT	-	XC6127C38E7R	Vdet-IC	3.8V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FPU	-	XC6127C38F7R	Vdet-IC	3.8V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FPV	-	XC6127C38G7R	Vdet-IC	3.8V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FPX	-	XC6127C38H7R	Vdet-IC	3.8V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FPY	-	XC6127C38J7R	Vdet-IC	3.8V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FPZ	-	XC6127C38K7R	Vdet-IC	3.8V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FQ	-	MIC2211-1.5/3.1BML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V(150mA)/3.1V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
FQ	-	R3114K211C	Vdet-IC	2.1V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FR	-	FP6121-OVSP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 150mA, +CE	VSON-6	56xv	VR19	9m	Fit
FR	-	PAM8404ZE	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x3W(5V/4Ω), shutdown	BGA-16	39	AFP46	9a	Pam
FR	-	R3114K221C	Vdet-IC	2.2V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FR	-	R3134K24EC	Vdet-IC	2.4V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FR	-	XC6223H32B9R-G	LVR-IC	LDO, 3.25V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FR0	-	XC6901D091ER-G	LVR-IC	-0.9V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FR1	-	XC6901D101ER-G	LVR-IC	-1.0V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FR2	-	XC6901D111ER-G	LVR-IC	-1.1V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FR3	-	XC6901D121ER-G	LVR-IC	-1.2V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FR4	-	XC6901D131ER-G	LVR-IC	-1.3V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FR5	-	XC6901D141ER-G	LVR-IC	-1.4V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FR6	-	XC6901D151ER-G	LVR-IC	-1.5V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FR7	-	XC6901D161ER-G	LVR-IC	-1.6V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FR8	-	XC6901D171ER-G	LVR-IC	-1.7V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FR9	-	XC6901D181ER-G	LVR-IC	-1.8V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRA	-	XC6127C39A7R	Vdet-IC	3.9V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FRA	-	XC6901D191ER-G	LVR-IC	-1.9V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRB	-	XC6127C39B7R	Vdet-IC	3.9V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FRB	-	XC6901D201ER-G	LVR-IC	-2.0V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRC	-	XC6127C39C7R	Vdet-IC	3.9V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FRC	-	XC6901D211ER-G	LVR-IC	-2.1V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRD	-	XC6127C39D7R	Vdet-IC	3.9V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FRD	-	XC6901D221ER-G	LVR-IC	-2.2V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRE	-	XC6127C39E7R	Vdet-IC	3.9V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FRE	-	XC6901D231ER-G	LVR-IC	-2.3V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRF	-	XC6127C39F7R	Vdet-IC	3.9V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FRF	-	XC6901D241ER-G	LVR-IC	-2.4V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRH	-	XC6127C39G7R	Vdet-IC	3.9V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FRH	-	XC6901D251ER-G	LVR-IC	-2.5V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRK	-	XC6127C39H7R	Vdet-IC	3.9V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FRK	-	XC6901D261ER-G	LVR-IC	-2.6V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRL	-	XC6127C39J7R	Vdet-IC	3.9V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FRL	-	XC6901D271ER-G	LVR-IC	-2.7V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRM	-	XC6127C39K7R	Vdet-IC	3.9V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FRM	-	XC6901D281ER-G	LVR-IC	-2.8V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRN	-	XC6127C40A7R	Vdet-IC	4.0V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FRN	-	XC6901D291ER-G	LVR-IC	-2.9V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRP	-	XC6127C40B7R	Vdet-IC	4.0V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FRP	-	XC6901D301ER-G	LVR-IC	-3.0V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRR	-	XC6127C40C7R	Vdet-IC	4.0V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FRR	-	XC6901D311ER-G	LVR-IC	-3.1V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRS	-	XC6127C40D7R	Vdet-IC	4.0V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FRS	-	XC6901D321ER-G	LVR-IC	-3.2V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRT	-	XC6127C40E7R	Vdet-IC	4.0V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FRT	-	XC6901D331ER-G	LVR-IC	-3.3V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRU	-	XC6127C40F7R	Vdet-IC	4.0V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FRU	-	XC6901D341ER-G	LVR-IC	-3.4V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRV	-	XC6127C40G7R	Vdet-IC	4.0V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FRV	-	XC6901D351ER-G	LVR-IC	-3.5V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRX	-	XC6127C40H7R	Vdet-IC	4.0V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FRX	-	XC6901D361ER-G	LVR-IC	-3.6V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRY	-	XC6127C40J7R	Vdet-IC	4.0V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FRY	-	XC6901D371ER-G	LVR-IC	-3.7V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FRZ	-	XC6127C40K7R	Vdet-IC	4.0V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FRZ	-	XC6901D381ER-G	LVR-IC	-3.8V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
fs	-	FP6121-LVSP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 150mA, +CE	VSON-6	56xv	VR19	9m	Fit
FS	-	R3114K231C	Vdet-IC	2.3V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FS	-	R3134K25EC	Vdet-IC	2.5V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FS	-	RT9193-25GQW	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
FS	-	XC6223H33B9R-G	LVR-IC	LDO, 3.35V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FS0	-	XC6901D391ER-G	LVR-IC	-3.9V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FS1	-	XC6901D401ER-G	LVR-IC	-4.0V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FS2	-	XC6901D411ER-G	LVR-IC	-4.1V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FS3	-	XC6901D421ER-G	LVR-IC	-4.2V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FS4	-	XC6901D431ER-G	LVR-IC	-4.3V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FS5	-	XC6901D441ER-G	LVR-IC	-4.4V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FS6	-	XC6901D451ER-G	LVR-IC	-4.5V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FS7	-	XC6901D461ER-G	LVR-IC	-4.6V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FS8	-	XC6901D471ER-G	LVR-IC	-4.7V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FS9	-	XC6901D481ER-G	LVR-IC	-4.8V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSA	-	XC6127C41A7R	Vdet-IC	4.1V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FSA	-	XC6901D491ER-G	LVR-IC	-4.9V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSB	-	XC6127C41B7R	Vdet-IC	4.1V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FSB	-	XC6901D501ER-G	LVR-IC	-5.0V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSC	-	XC6127C41C7R	Vdet-IC	4.1V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FSC	-	XC6901D511ER-G	LVR-IC	-5.1V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSD	-	XC6127C41D7R	Vdet-IC	4.1V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FSD	-	XC6901D521ER-G	LVR-IC	-5.2V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSE	-	XC6127C41E7R	Vdet-IC	4.1V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FSE	-	XC6901D531ER-G	LVR-IC	-5.3V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSF	-	XC6127C41F7R	Vdet-IC	4.1V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FSF	-	XC6901D541ER-G	LVR-IC	-5.4V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSH	-	XC6127C41G7R	Vdet-IC	4.1V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FSH	-	XC6901D551ER-G	LVR-IC	-5.5V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSK	-	XC6127C41H7R	Vdet-IC	4.1V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FSK	-	XC6901D561ER-G	LVR-IC	-5.6V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSL	-	XC6127C41J7R	Vdet-IC	4.1V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FSL	-	XC6901D571ER-G	LVR-IC	-5.7V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSM	-	XC6127C41K7R	Vdet-IC	4.1V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FSM	-	XC6901D581ER-G	LVR-IC	-5.8V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSN	-	XC6127C42A7R	Vdet-IC	4.2V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FSN	-	XC6901D591ER-G	LVR-IC	-5.9V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSP	-	XC6127C42B7R	Vdet-IC	4.2V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FSP	-	XC6901D601ER-G	LVR-IC	-6.0V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSR	-	XC6127C42C7R	Vdet-IC	4.2V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FSR	-	XC6901D611ER-G	LVR-IC	-6.1V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSS	-	XC6127C42D7R	Vdet-IC	4.2V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FSS	-	XC6901D621ER-G	LVR-IC	-6.2V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FST	-	XC6127C42E7R	Vdet-IC	4.2V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FST	-	XC6901D631ER-G	LVR-IC	-6.3V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSU	-	XC6127C42F7R	Vdet-IC	4.2V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FSU	-	XC6901D641ER-G	LVR-IC	-6.4V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSV	-	XC6127C42G7R	Vdet-IC	4.2V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FSV	-	XC6901D651ER-G	LVR-IC	-6.5V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSX	-	XC6127C42H7R	Vdet-IC	4.2V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FSX	-	XC6901D661ER-G	LVR-IC	-6.6V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSY	-	XC6127C42J7R	Vdet-IC	4.2V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FSY	-	XC6901D671ER-G	LVR-IC	-6.7V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FSZ	-	XC6127C42K7R	Vdet-IC	4.2V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FSZ	-	XC6901D681ER-G	LVR-IC	-6.8V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FT	-	R3114K241C	Vdet-IC	2.4V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FT	-	R3134K26EC	Vdet-IC	2.6V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FT	-	XC6223H34B9R-G	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FT0	-	XC6901D691ER-G	LVR-IC	-6.9V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FT1	-	XC6901D701ER-G	LVR-IC	-7.0V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FT2	-	XC6901D711ER-G	LVR-IC	-7.1V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FT3	-	XC6901D721ER-G	LVR-IC	-7.2V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FT4	-	XC6901D731ER-G	LVR-IC	-7.3V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FT5	-	XC6901D741ER-G	LVR-IC	-7.4V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FT6	-	XC6901D751ER-G	LVR-IC	-7.5V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FT7	-	XC6901D761ER-G	LVR-IC	-7.6V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FT8	-	XC6901D771ER-G	LVR-IC	-7.7V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FT9	-	XC6901D781ER-G	LVR-IC	-7.8V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTA	-	XC6127C43A7R	Vdet-IC	4.3V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FTA	-	XC6901D791ER-G	LVR-IC	-7.9V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTB	-	XC6127C43B7R	Vdet-IC	4.3V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FTB	-	XC6901D801ER-G	LVR-IC	-8.0V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTC	-	XC6127C43C7R	Vdet-IC	4.3V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FTC	-	XC6901D811ER-G	LVR-IC	-8.1V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTD	-	XC6127C43D7R	Vdet-IC	4.3V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FTD	-	XC6901D821ER-G	LVR-IC	-8.2V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTE	-	XC6127C43E7R	Vdet-IC	4.3V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FTE	-	XC6901D831ER-G	LVR-IC	-8.3V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTF	-	XC6127C43F7R	Vdet-IC	4.3V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FTF	-	XC6901D841ER-G	LVR-IC	-8.4V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTH	-	XC6127C43G7R	Vdet-IC	4.3V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FTH	-	XC6901D851ER-G	LVR-IC	-8.5V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTK	-	XC6127C43H7R	Vdet-IC	4.3V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FTK	-	XC6901D861ER-G	LVR-IC	-8.6V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTL	-	XC6127C43J7R	Vdet-IC	4.3V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FTL	-	XC6901D871ER-G	LVR-IC	-8.7V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTM	-	XC6127C43K7R	Vdet-IC	4.3V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FTM	-	XC6901D881ER-G	LVR-IC	-8.8V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTN	-	XC6127C44A7R	Vdet-IC	4.4V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FTN	-	XC6901D891ER-G	LVR-IC	-8.9V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FTP	-	XC6127C44B7R	Vdet-IC	4.4V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FTP	-	XC6901D901ER-G	LVR-IC	-9.0V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTR	-	XC6127C44C7R	Vdet-IC	4.4V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FTR	-	XC6901D911ER-G	LVR-IC	-9.1V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTS	-	XC6127C44D7R	Vdet-IC	4.4V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FTS	-	XC6901D921ER-G	LVR-IC	-9.2V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTT	-	XC6127C44E7R	Vdet-IC	4.4V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FTT	-	XC6901D931ER-G	LVR-IC	-9.3V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTU	-	XC6127C44F7R	Vdet-IC	4.4V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FTU	-	XC6901D941ER-G	LVR-IC	-9.4V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTV	-	XC6127C44G7R	Vdet-IC	4.4V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FTV	-	XC6901D951ER-G	LVR-IC	-9.5V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTX	-	XC6127C44H7R	Vdet-IC	4.4V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FTX	-	XC6901D961ER-G	LVR-IC	-9.6V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTY	-	XC6127C44J7R	Vdet-IC	4.4V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FTY	-	XC6901D971ER-G	LVR-IC	-9.7V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FTZ	-	XC6127C44K7R	Vdet-IC	4.4V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FTZ	-	XC6901D981ER-G	LVR-IC	-9.8V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FU	-	R3114K251C	Vdet-IC	2.5V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FU	-	R3134K27EC	Vdet-IC	2.7V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FU	-	XC6223H35B9R-G	LVR-IC	LDO, 3.55V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FU0	-	XC6901D991ER-G	LVR-IC	-9.9V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FU1	-	XC6901DA01ER-G	LVR-IC	-10.0V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FU2	-	XC6901DA11ER-G	LVR-IC	-10.1V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FU3	-	XC6901DA21ER-G	LVR-IC	-10.2V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FU4	-	XC6901DA31ER-G	LVR-IC	-10.3V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FU5	-	XC6901DA41ER-G	LVR-IC	-10.4V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FU6	-	XC6901DA51ER-G	LVR-IC	-10.5V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FU7	-	XC6901DA61ER-G	LVR-IC	-10.6V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FU8	-	XC6901DA71ER-G	LVR-IC	-10.7V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FU9	-	XC6901DA81ER-G	LVR-IC	-10.8V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FUA	-	XC6127C45A7R	Vdet-IC	4.5V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FUA	-	XC6901DA91ER-G	LVR-IC	-10.9V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FUB	-	XC6127C45B7R	Vdet-IC	4.5V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FUB	-	XC6901DB01ER-G	LVR-IC	-11.0V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FUC	-	XC6127C45C7R	Vdet-IC	4.5V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FUC	-	XC6901DB11ER-G	LVR-IC	-11.1V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FUD	-	XC6127C45D7R	Vdet-IC	4.5V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FUD	-	XC6901DB21ER-G	LVR-IC	-11.2V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FUE	-	XC6127C45E7R	Vdet-IC	4.5V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FUE	-	XC6901DB31ER-G	LVR-IC	-11.3V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FUF	-	XC6127C45F7R	Vdet-IC	4.5V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FUF	-	XC6901DB41ER-G	LVR-IC	-11.4V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FUH	-	XC6127C45G7R	Vdet-IC	4.5V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FUH	-	XC6901DB51ER-G	LVR-IC	-11.5V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FUK	-	XC6127C45H7R	Vdet-IC	4.5V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FUK	-	XC6901DB61ER-G	LVR-IC	-11.6V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FUL	-	XC6127C45J7R	Vdet-IC	4.5V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FUL	-	XC6901DB71ER-G	LVR-IC	-11.7V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FUM	-	XC6127C45K7R	Vdet-IC	4.5V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FUM	-	XC6901DB81ER-G	LVR-IC	-11.8V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FUN	-	XC6127C46A7R	Vdet-IC	4.6V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FUN	-	XC6901DB91ER-G	LVR-IC	-11.9V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FUP	-	XC6127C46B7R	Vdet-IC	4.6V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FUP	-	XC6901DC01ER-G	LVR-IC	-12.0V±1.5%, 200mA, +CE, CL	USP-6C	49ey	VR7	9a	Tor
FUR	-	XC6127C46C7R	Vdet-IC	4.6V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FUS	-	XC6127C46D7R	Vdet-IC	4.6V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FUT	-	XC6127C46E7R	Vdet-IC	4.6V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FUU	-	XC6127C46F7R	Vdet-IC	4.6V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FUV	-	XC6127C46G7R	Vdet-IC	4.6V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FUX	-	XC6127C46H7R	Vdet-IC	4.6V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FUY	-	XC6127C46J7R	Vdet-IC	4.6V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FUZ	-	XC6127C46K7R	Vdet-IC	4.6V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FV	-	FP6121-PVSP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 150mA, +CE	VSON-6	56xv	VR19	9m	Fit
FV	-	R3114K261C	Vdet-IC	2.6V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FV	-	R3134K28EC	Vdet-IC	2.8V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FV	-	XC6223H36B9R-G	LVR-IC	LDO, 3.65V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FV2	-	XC6225A082GR-G	LVR-IC	LDO, 0.8V±30mV, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FV3	-	XC6225A092GR-G	LVR-IC	LDO, 0.9V±30mV, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FV4	-	XC6225A102GR-G	LVR-IC	LDO, 1.0V±30mV, 30mA, +CE	USP-4	45vm	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FV5	-	XC6225A112GR-G	LVR-IC	LDO, 1.1V±30mV, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FV6	-	XC6225A122GR-G	LVR-IC	LDO, 1.2V±30mV, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FV7	-	XC6225A132GR-G	LVR-IC	LDO, 1.3V±30mV, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FV8	-	XC6225A142GR-G	LVR-IC	LDO, 1.4V±30mV, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FV9	-	XC6225A152GR-G	LVR-IC	LDO, 1.5V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVA	-	XC6127C47A7R	Vdet-IC	4.7V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FVA	-	XC6225A162GR-G	LVR-IC	LDO, 1.6V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVB	-	XC6127C47B7R	Vdet-IC	4.7V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FVB	-	XC6225A172GR-G	LVR-IC	LDO, 1.7V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVC	-	XC6127C47C7R	Vdet-IC	4.7V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FVC	-	XC6225A182GR-G	LVR-IC	LDO, 1.8V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVD	-	XC6127C47D7R	Vdet-IC	4.7V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FVD	-	XC6225A192GR-G	LVR-IC	LDO, 1.9V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVE	-	XC6127C47E7R	Vdet-IC	4.7V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FVE	-	XC6225A202GR-G	LVR-IC	LDO, 2.0V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVF	-	XC6127C47F7R	Vdet-IC	4.7V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FVF	-	XC6225A212GR-G	LVR-IC	LDO, 2.1V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVH	-	XC6127C47G7R	Vdet-IC	4.7V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FVH	-	XC6225A222GR-G	LVR-IC	LDO, 2.2V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVK	-	XC6127C47H7R	Vdet-IC	4.7V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FVK	-	XC6225A232GR-G	LVR-IC	LDO, 2.3V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVL	-	XC6127C47J7R	Vdet-IC	4.7V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FVL	-	XC6225A242GR-G	LVR-IC	LDO, 2.4V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVM	-	XC6127C47K7R	Vdet-IC	4.7V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FVM	-	XC6225A252GR-G	LVR-IC	LDO, 2.5V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVN	-	XC6127C48A7R	Vdet-IC	4.8V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FVN	-	XC6225A262GR-G	LVR-IC	LDO, 2.6V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVP	-	XC6127C48B7R	Vdet-IC	4.8V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FVP	-	XC6225A272GR-G	LVR-IC	LDO, 2.7V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVR	-	XC6127C48C7R	Vdet-IC	4.8V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FVR	-	XC6225A282GR-G	LVR-IC	LDO, 2.8V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVS	-	XC6127C48D7R	Vdet-IC	4.8V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FVS	-	XC6225A292GR-G	LVR-IC	LDO, 2.9V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVT	-	XC6127C48E7R	Vdet-IC	4.8V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FVT	-	XC6225A302GR-G	LVR-IC	LDO, 3.0V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVU	-	XC6127C48F7R	Vdet-IC	4.8V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FVU	-	XC6225A312GR-G	LVR-IC	LDO, 3.1V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVV	-	XC6127C48G7R	Vdet-IC	4.8V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FVV	-	XC6225A322GR-G	LVR-IC	LDO, 3.2V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVX	-	XC6127C48H7R	Vdet-IC	4.8V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FVX	-	XC6225A332GR-G	LVR-IC	LDO, 3.3V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVY	-	XC6127C48J7R	Vdet-IC	4.8V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FVY	-	XC6225A342GR-G	LVR-IC	LDO, 3.4V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FVZ	-	XC6127C48K7R	Vdet-IC	4.8V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FVZ	-	XC6225A352GR-G	LVR-IC	LDO, 3.5V±2%, 30mA, +CE	USP-4	45vm	VR4	9a	Tor
FW	-	R3114K271C	Vdet-IC	2.7V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FW	-	R3134K29EC	Vdet-IC	2.9V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
fx	-	FP6121-AVSP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 150mA, +CE	VSON-6	56xv	VR19	9m	Fit
FX	-	R3114K281C	Vdet-IC	2.8V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FX	-	R3134K30EC	Vdet-IC	3.0V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FX	-	XC6223H37B9R-G	LVR-IC	LDO, 3.75V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FX2	-	XC6225B082GR-G	LVR-IC	LDO, 0.8V±30mV, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FX3	-	XC6225B092GR-G	LVR-IC	LDO, 0.9V±30mV, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FX4	-	XC6225B102GR-G	LVR-IC	LDO, 1.0V±30mV, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FX5	-	XC6225B112GR-G	LVR-IC	LDO, 1.1V±30mV, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FX6	-	XC6225B122GR-G	LVR-IC	LDO, 1.2V±30mV, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FX7	-	XC6225B132GR-G	LVR-IC	LDO, 1.3V±30mV, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FX8	-	XC6225B142GR-G	LVR-IC	LDO, 1.4V±30mV, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FX9	-	XC6225B152GR-G	LVR-IC	LDO, 1.5V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXA	-	XC6127C49A7R	Vdet-IC	4.9V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FXA	-	XC6225B162GR-G	LVR-IC	LDO, 1.6V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXB	-	XC6127C49B7R	Vdet-IC	4.9V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FXB	-	XC6225B172GR-G	LVR-IC	LDO, 1.7V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXC	-	XC6127C49C7R	Vdet-IC	4.9V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FXC	-	XC6225B182GR-G	LVR-IC	LDO, 1.8V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXD	-	XC6127C49D7R	Vdet-IC	4.9V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FXD	-	XC6225B18AGR-G	LVR-IC	LDO, 1.85V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXE	-	XC6127C49E7R	Vdet-IC	4.9V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FXE	-	XC6225B202GR-G	LVR-IC	LDO, 2.0V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXF	-	XC6127C49F7R	Vdet-IC	4.9V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FXF	-	XC6225B212GR-G	LVR-IC	LDO, 2.1V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXH	-	XC6127C49G7R	Vdet-IC	4.9V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FXH	-	XC6225B222GR-G	LVR-IC	LDO, 2.2V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXK	-	XC6127C49H7R	Vdet-IC	4.9V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FXK	-	XC6225B232GR-G	LVR-IC	LDO, 2.3V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXL	-	XC6127C49J7R	Vdet-IC	4.9V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FXL	-	XC6225B242GR-G	LVR-IC	LDO, 2.4V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXM	-	XC6127C49K7R	Vdet-IC	4.9V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FXM	-	XC6225B252GR-G	LVR-IC	LDO, 2.5V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXN	-	XC6127C50A7R	Vdet-IC	5.0V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FXN	-	XC6225B262GR-G	LVR-IC	LDO, 2.6V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXP	-	XC6127C50B7R	Vdet-IC	5.0V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FXP	-	XC6225B272GR-G	LVR-IC	LDO, 2.7V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXR	-	XC6127C50C7R	Vdet-IC	5.0V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FXR	-	XC6225B282GR-G	LVR-IC	LDO, 2.8V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXS	-	XC6127C50D7R	Vdet-IC	5.0V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FXS	-	XC6225B292GR-G	LVR-IC	LDO, 2.9V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXT	-	XC6127C50E7R	Vdet-IC	5.0V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FXT	-	XC6225B302GR-G	LVR-IC	LDO, 3.0V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXU	-	XC6127C50F7R	Vdet-IC	5.0V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FXU	-	XC6225B312GR-G	LVR-IC	LDO, 3.1V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXV	-	XC6127C50G7R	Vdet-IC	5.0V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FXV	-	XC6225B322GR-G	LVR-IC	LDO, 3.2V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXX	-	XC6127C50H7R	Vdet-IC	5.0V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FXX	-	XC6225B332GR-G	LVR-IC	LDO, 3.3V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXY	-	XC6127C50J7R	Vdet-IC	5.0V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FXY	-	XC6225B342GR-G	LVR-IC	LDO, 3.4V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FXZ	-	XC6127C50K7R	Vdet-IC	5.0V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FXZ	-	XC6225B352GR-G	LVR-IC	LDO, 3.5V±2%, 30mA, +CE, CL	USP-4	45vm	VR4	9a	Tor
FY	-	R3114K291C	Vdet-IC	2.9V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FY	-	R3134K31EC	Vdet-IC	3.1V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FY	-	XC6223H38B9R-G	LVR-IC	LDO, 3.85V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FYA	-	XC6127C51A7R	Vdet-IC	5.1V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FYB	-	XC6127C51B7R	Vdet-IC	5.1V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FYC	-	XC6127C51C7R	Vdet-IC	5.1V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FYD	-	XC6127C51D7R	Vdet-IC	5.1V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FYE	-	XC6127C51E7R	Vdet-IC	5.1V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FYF	-	XC6127C51F7R	Vdet-IC	5.1V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FYH	-	XC6127C51G7R	Vdet-IC	5.1V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FYK	-	XC6127C51H7R	Vdet-IC	5.1V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FYL	-	XC6127C51J7R	Vdet-IC	5.1V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FYM	-	XC6127C51K7R	Vdet-IC	5.1V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FYN	-	XC6127C52A7R	Vdet-IC	5.2V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FYP	-	XC6127C52B7R	Vdet-IC	5.2V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FYR	-	XC6127C52C7R	Vdet-IC	5.2V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FYS	-	XC6127C52D7R	Vdet-IC	5.2V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FYT	-	XC6127C52E7R	Vdet-IC	5.2V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FYU	-	XC6127C52F7R	Vdet-IC	5.2V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FYV	-	XC6127C52G7R	Vdet-IC	5.2V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FYX	-	XC6127C52H7R	Vdet-IC	5.2V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FYY	-	XC6127C52J7R	Vdet-IC	5.2V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FYZ	-	XC6127C52K7R	Vdet-IC	5.2V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
fz	-	FP6121-BVSP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 150mA, +CE	VSON-6	56xv	VR19	9m	Fit
FZ	-	R3114K301C	Vdet-IC	3.0V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
FZ	-	R3134K32EC	Vdet-IC	3.2V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
FZ	-	XC6223H39B9R-G	LVR-IC	LDO, 3.95V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
FZA	-	XC6127C53A7R	Vdet-IC	5.3V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FZB	-	XC6127C53B7R	Vdet-IC	5.3V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FZC	-	XC6127C53C7R	Vdet-IC	5.3V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FZD	-	XC6127C53D7R	Vdet-IC	5.3V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FZE	-	XC6127C53E7R	Vdet-IC	5.3V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FZF	-	XC6127C53F7R	Vdet-IC	5.3V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FZH	-	XC6127C53G7R	Vdet-IC	5.3V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FZK	-	XC6127C53H7R	Vdet-IC	5.3V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FZL	-	XC6127C53J7R	Vdet-IC	5.3V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FZM	-	XC6127C53K7R	Vdet-IC	5.3V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FZN	-	XC6127C54A7R	Vdet-IC	5.4V±0.8%, -Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FZP	-	XC6127C54B7R	Vdet-IC	5.4V±0.8%, -Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FZR	-	XC6127C54C7R	Vdet-IC	5.4V±0.8%, -Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FZS	-	XC6127C54D7R	Vdet-IC	5.4V±0.8%, -Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
FZT	-	XC6127C54E7R	Vdet-IC	5.4V±0.8%, -Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
FZU	-	XC6127C54F7R	Vdet-IC	5.4V±0.8%, +Reset PPO, -MR, Rt=50ms	USPN-4	58cc	VD5	9h	Tor
FZV	-	XC6127C54G7R	Vdet-IC	5.4V±0.8%, +Reset PPO, -MR, Rt=100ms	USPN-4	58cc	VD5	9h	Tor
FZX	-	XC6127C54H7R	Vdet-IC	5.4V±0.8%, +Reset PPO, -MR, Rt=200ms	USPN-4	58cc	VD5	9h	Tor
FZY	-	XC6127C54J7R	Vdet-IC	5.4V±0.8%, +Reset PPO, -MR, Rt=400ms	USPN-4	58cc	VD5	9h	Tor
FZZ	-	XC6127C54K7R	Vdet-IC	5.4V±0.8%, +Reset PPO, -MR, Rt=800ms	USPN-4	58cc	VD5	9h	Tor
g	-	BU18UA3WNVX	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
G	-	BAR63-02L	PIN-diode	Sw, RF, 100V, 100mA, Vf<1.1V(50mA), < 0.3pF	TSLP-2-1	13d	-	2b	Inf
G0	-	R3118K161C	Vdet-IC	1.6V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
G0	-	RP109L181D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
G08	-	LM4808LD	Lin-IC	AF PA, 2..5.5V, 2x105mW(4V/16Ω)	DFN-8	92	AFP6	9a	Nsc
G09	-	LM4809LD	Lin-IC	AF PA, 2..5.5V, 2x105mW(4V/16Ω), shutdown	DFN-8	92	AFP7	9a	Nsc
G1	-	LM4922TL	Lin-IC	AF PA, 2.2..5.5V, 2x80mW(5V/16Ω), shutdown	BGA-16	39	-	9a	Nsc
G1	-	PDTC123EM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k	SOT-883	22ta	-	2b	Nxp
G1	-	PDTC123JM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k	SOT-883	22ta	-	2b	Nxp
G1	-	R3118K171C	Vdet-IC	1.7V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
G1	-	RP109L191D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
G10	-	LM4810LD	Lin-IC	AF PA, 2..5.5V, 2x105mW(4V/16Ω), shutdown	DFN-8	92	-	9a	Nsc
G10	-	LM4811LD	Lin-IC	AF PA, 2..5.5V, 2x105mW(4V/16Ω), shutdown	DFN-10	37	-	9a	Nsc
G19	-	LM4819LD	Lin-IC	AF PA, BTL, 2..5.5V, 35mWW(3.5V/8Ω), shutdown	DFN-8	92	AFP11	9a	Nsc
G2	-	PDTA123YM	Si-pnp-Digi	Sw, 50V, 100mA, 200mW, R1/R2=2.2k/10k	SOT-883	22ta	-	2a	Nxp
G2	-	R3118K181C	Vdet-IC	1.8V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
G2	-	RP109L201D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
G28	-	MIC5219-2.8BML	LVR-IC	LDO, 2.8V±1%, 500mA, +CE	MLF-6	74ub	VR7	9m	Mcr
G28	ma	MIC5219-2.8YML	LVR-IC	LDO, 2.8V±1%, 500mA, +CE, Pb Free	MLF-6	74ub	VR7	9m	Mcr
G3	-	PDTA113ZM	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=1k/10k	SOT-883	22ta	-	2a	Nxp
G3	-	R3118K191C	Vdet-IC	1.9V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
G3	-	RP109L211D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
G30	-	MIC5219-3.0BML	LVR-IC	LDO, 3.0V±1%, 500mA, +CE	MLF-6	74ub	VR7	9m	Mcr
G30	ma	MIC5219-3.0YML	LVR-IC	LDO, 3.0V±1%, 500mA, +CE, Pb Free	MLF-6	74ub	VR7	9m	Mcr
G33	-	MIC5219-3.3BML	LVR-IC	LDO, 3.3V±1%, 500mA, +CE	MLF-6	74ub	VR7	9m	Mcr
G33	ma	MIC5219-3.3YML	LVR-IC	LDO, 3.3V±1%, 500mA, +CE, Pb Free	MLF-6	74ub	VR7	9m	Mcr
G4	-	LM4673TM	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.65W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Nsc
G4	-	MIC5381-1.8/1.2YFT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.2V±2%, 150mA, +CE, CL	MLF-6A	81g5	VR19	9x	Mcr
G4	-	PDTA113EM	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, R1/R2=1k/1k	SOT-883	22ta	-	2a	Nxp
G4	-	R3118K201C	Vdet-IC	2.0V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
G4	-	RP109L221D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
G5	-	LM4846TL	Lin-IC	AF PA, BTL, 2.7..5.5V, 500mW(4Ω)+2x25mW(32Ω), I2C	BGA-25	39	-	9a	Nsc
G5	-	PDTC115TM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=100k	SOT-883	22ta	-	2b	Nxp
G5	-	R3118K211C	Vdet-IC	2.1V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
G5	-	RP109L231D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
G50	ma	MIC5219-5.0YMT	LVR-IC	LDO, 5.0V±1%, 500mA, +CE, Pb Free	MLF-6	74ub	VR7	9m	Mcr
G52	-	LM4851IBL	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.1W(4Ω)+2x115mW(8Ω), volume	BGA-16	39	-	9a	Nsc
G6	-	R3118K221C	Vdet-IC	2.2V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
G6	-	RP109L241D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
G64	-	LM4864LD	Lin-IC	AF PA, BTL, 2.7..5.5V, 725mW(5V/8Ω), shutdown	DFN-10	37	AFP15	9a	Nsc
G65	-	LM4865IBP	Lin-IC	AF PA, BTL, 2.7..5.5V, 750mW(5V/8Ω), DC volume	BGA-9	39	-	9a	Nsc
G7	-	PDTC123YM	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/10k	SOT-883	22ta	-	2b	Nxp
G7	-	R3118K231C	Vdet-IC	2.3V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
G7	-	RP109L251D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
G79	-	LM4879IBL	Lin-IC	AF PA, BTL, 2.2..5V, 1.1W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Nsc
G8	-	LM4995TM	Lin-IC	AF PA, BTL, 2.4..5.5V, 1.3W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Nsc
G8	-	R3118K241C	Vdet-IC	2.4V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
G8	-	RP109L261D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
G9	-	R3118K251C	Vdet-IC	2.5V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
G9	-	RP109L271D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
G93	-	LM4893ITL	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Nsc
GA	-	LM4872IBP	Lin-IC	AF PA, BTL, 2..5.5V, 1W(5V/8Ω), shutdown	BGA-8A	39	AFP44	9a	Nsc
GA	-	R3114K311C	Vdet-IC	3.1V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GA	-	R3134K33EC	Vdet-IC	3.3V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GA3	-	LM4889ITL	Lin-IC	AF PA, BTL, 2.7..5.5V, 1W(5V/8Ω), shutdown	BGA-8A	39	AFP44	9a	Nsc
GA3	-	LM4902LD	Lin-IC	AF PA, BTL, 2.2..5.5V, 265mW(5V/8Ω), shutdown	DFN-8	92	AFP12	9a	Nsc
GA4	-	LM4910LQ	Lin-IC	AF PA, BTL, 2.2..5.5V, 2x35mW(3V/32Ω), shutdown	LQ-8	77	-	9a	Nsc
GA5	-	LM4915LQ	Lin-IC	AF PA, BTL, 2.2..5.5V, 90mW(3V/32Ω), shutdown	LQ-8	77	-	9a	Nsc
GA6	-	LM4904ITL	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	BGA-8A	39	AFP44	9a	Nsc
GA6	-	LM4905LQ	Lin-IC	AF PA, BTL, 2.5..5.5V, 1W(5V/8Ω), shutdown	LQ-8	77	-	9a	Nsc
GA7	-	LM4894ITL	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	AFP53	9a	Nsc
GA7	-	LM4908LQ	Lin-IC	AF PA, 2.2..5.5V, 2x100mW(5V/16Ω)	LQ-8	77	AFP6	9a	Nsc
GA8	-	LM4890ITL	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	BGA-9	39	AFP44	9k	Nsc
GAA	ma	MIC5219YMT	LVR-IC	LDO, Adj. 0.9..5.0V2%, 500mA, +CE, Pb Free	MLF-6	74a3	VR16	9m	Mcr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GB	-	LM4877IBP	Lin-IC	AF PA, BTL, 2..5.5V, 1W(5V/8Ω), shutdown	BGA-8A	39	AFP44	9a	Nsc
GB	-	R3114K321C	Vdet-IC	3.2V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GB	-	R3134K34EC	Vdet-IC	3.4V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GB1	-	LM4851ITL	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.1W(5V/4Ω)+2x115mW(8Ω)	BGA-16	39	-	9a	Nsc
GB2	-	LM4923LQ	Lin-IC	AF PA, BTL, 2.4..5.5V, 1.1W(5V/8Ω), shutdown	LQ-8	77	-	9j	Nsc
GB3	-	LM4809LQ	Lin-IC	AF PA, 2..5.5V, 2x100mW(16Ω), shutdown	LQ-8	77	AFP7	9a	Nsc
GB3	-	XPT4809LQ	Lin-IC	AF PA, 1.8..6V, 2x105mW(5V/16Ω), shutdown	LQ-8	77	AFP7	9m	Xpt
GB6	-	LM4930ITL	Lin-IC	16-bit DAC, AF PA, BTL, 2.7..5.5V, 300mW(4Ω)+2x25mW(32Ω), I2C	BGA-36	39	-	9a	Nsc
GC	-	R3114K331C	Vdet-IC	3.3V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GC	-	R3134K35EC	Vdet-IC	3.5V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GC0	-	LM4900LD	Lin-IC	AF PA, BTL, 2.2..5.5V, 265mW(5V/8Ω), shutdown	DFN-8	92	AFP12	9a	Nsc
GC1	-	LM4899ITL	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), select shutdown	BGA-9	39	AFP54	9a	Nsc
GC3	-	LM4898ITL	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	AFP53	9a	Nsc
GC9	-	LM49100GR	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.25W(5V/4Ω)+2x50mW(32Ω), I2C	BGA-25	39	-	9a	Nsc
GC9	-	LM4931ITL	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.1W(4Ω)+2x26mW(32Ω), I2C	BGA-42	39	-	9a	Nsc
GD	-	LM4878IBP	Lin-IC	AF PA, BTL, 2..5.5V, 1W(5V/8Ω), shutdown	BGA-8A	39	AFP44	9a	Nsc
GD	-	R3114K341C	Vdet-IC	3.4V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GD	-	R3134K36EC	Vdet-IC	3.6V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GE	-	EMA1001IBP	Lin-IC	AF PA, BTL, 2..5.5V, 1W(5V/8Ω), shutdown	BGA-8A	39	AFP44	9k	Emp
GE	-	LM4890IBP	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	BGA-8A	39	AFP44	9k	Nsc
GE	-	R3114K351C	Vdet-IC	3.5V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GE	-	R3134K37EC	Vdet-IC	3.7V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GE2	-	LM4894ITP	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	AFP53	9a	Nsc
GE3	-	LM4895ITP	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), select shutdown	BGA-9	39	AFP54	9a	Nsc
GE5	-	LM4845ITL	Lin-IC	AF PA, BTL, 2.7..5.5V, 500mW(5V/4Ω)+2x25mW(32Ω), I2C	BGA-25	39	-	9a	Nsc
GF	-	LM4820IBP-6	Lin-IC	AF PA, BTL, 2..5.5V, 1W(5V/8Ω), shutdown	BGA-8A	39	AFP44	9a	Nsc
GF	-	R3114K361C	Vdet-IC	3.6V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GF	-	R3134K38EC	Vdet-IC	3.8V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GF3	-	LM4844TL	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x1.2W(5V/4Ω)+2x80mW(32Ω), I2C	BGA-30	39	-	9a	Nsc
GF7	-	LM4962TL	Lin-IC	AF PA, BTL, 2.7..5.5V, 15Vp-p, ceramic speaker, shutdown	BGA-20	39	-	9a	Nsc
GFZ	mb	MIC5310-1.8/1.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.5V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
GG	-	LM4891IBP	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	BGA-8A	39	AFP44	9a	Nsc
GG	-	R3114K371C	Vdet-IC	3.7V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GG	-	R3134K39EC	Vdet-IC	3.9V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GG3	-	LM48821TL	Lin-IC	AF PA, 1.8..4V, 2x40mW(3V/16Ω), I2C volume	BGA-16	39	-	9a	Nsc
GG3	-	LM4980SD	Lin-IC	AF PA, BTL, 1.5..3.6V, 2x42mW(5V/16Ω), shutdown	DFN-10	37	-	9a	Nsc
GG3	-	LM4982TL	Lin-IC	AF PA, 2.3..5.5V, 2x80mW(5V/16Ω), I2C volume	BGA-16	39	-	9a	Nsc
GG7	-	LM4935RL	Lin-IC	AF PA, class-D, 1.8..4.5V, 600+2x33+115mW(8/32Ω), I2C, SPI	BGA-49	39	-	9j	Nsc
GG9	-	LM4934RL	Lin-IC	AF PA, 1.8..4.5V, 2x520+2x36+55mW(8/32Ω), I2C, SPI	BGA-42	39	-	9j	Nsc
GGZ	mb	MIC5310-1.8/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.8V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
GH	-	LD6805K/18H	LVR-IC	LDO, 1.8V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
GH	-	LM4892IBP	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	BGA-8A	39	-	9k	Nsc
GH	-	R3114K381C	Vdet-IC	3.8V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GH	-	R3134K40EC	Vdet-IC	4.0V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GH1	-	LM4947TL	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 500mW(8Ω)+2x37mW(32Ω), I2C	BGA-25	39	-	9j	Nsc
GH4	-	LM4920TL	Lin-IC	AF PA, 2.2..5.5V, 2x80mW(5V/16Ω), shutdown	BGA-16	39	-	9j	Nsc
GI1	-	LM49321RL	Lin-IC	AF PA, 1.8..4.5V, 520+2x36+55mW(8/32Ω), I2C, I2S or SPI	BGA-36	39	-	9j	Nsc
GI1	-	LM4937TL	Lin-IC	AF PA, 1.8..4.5V, 520+2x36+55mW(8/32Ω), I2C, I2S, SPI	BGA-36	39	-	9j	Nsc
GI2	-	LM4674ATL	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x2.5W(5V/4Ω), shutdown	BGA-16	39	AFP46	9j	Nsc
GI3	-	LM49370RL	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 1.2W(4Ω)+2x33mW(32Ω), shutdown	BGA-49	39	-	9a	Nsc
GI7	-	LM48820TM	Lin-IC	AF PA, 2.7..5V, 2x97mW(5V/16Ω), shutdown	BGA-14	39	-	9a	Nsc
GI9	-	LM4946TM	Lin-IC	AF PA, BTL, 2.5..5.5V, 540mW(4Ω)+2x35mW(32Ω), PWM	BGA-25	39	-	9j	Nsc
GJ	-	MIC2211-1.8/2.5BML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(150mA)/2.5V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
GJ	-	R3114K391C	Vdet-IC	3.9V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GJ	-	R3134K41EC	Vdet-IC	4.1V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GJ1	-	LM49250RL	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x2.4W+2x41mW+170mW(4/32Ω), I2C	BGA-36	39	-	9j	Nsc
GJ8	-	LM49350RL	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 1.2W+2x58mW(4/32Ω), I2S/PCM	BGA-36	39	-	9a	Nsc
GK	-	LM4895IBP	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), select shutdown	BGA-9	39	AFP54	9a	Nsc
GK	-	MIC2211-1.8/2.6BML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(150mA)/2.6V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
GK	-	R3114K401C	Vdet-IC	4.0V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GK	-	R3134K42EC	Vdet-IC	4.2V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GK1	-	LM48822TL	Lin-IC	AF PA, 2.4..5.5V, 2x40mW(3V/16Ω), I2C volume	BGA-16	39	-	9a	Nsc
GK2	-	LM49120TL	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.3W(8Ω)+2x85mW(32Ω), I2C volume	BGA-16	39	-	9a	Nsc
GK4	-	LM48556TL	Lin-IC	AF PA, BTL, 2.7..5.5V, 15.7Vp-p, ceramic speaker, shutdown	BGA-12	39	-	9j	Nsc
GK6	-	LM48823TL	Lin-IC	AF PA, BTL, 2.7..5.5V, 15Vp-p, ceramic speaker, I2C volume	BGA-16	39	-	9a	Nsc
GK7	-	LM49150TL	Lin-IC	AF PA, 2.5..5.5V, 1.25W+2x42mW(4/32Ω), I2C	BGA-20	39	-	9j	Nsc
gl	-	BU21UA3WNVX	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
GL	-	LM4894IBP	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	AFP53	9a	Nsc
GL	-	R3114K411C	Vdet-IC	4.1V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GL	-	R3134K43EC	Vdet-IC	4.3V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GL2	-	LM48413TL	Lin-IC	AF PA, BTL, class-D, 2..5.5V, 2x2.3W(5V/4Ω), shutdown, 3D	BGA-18	39	-	9a	Nsc
GL3	-	LM49200TL	Lin-IC	AF PA, BTL, 2.5..5.5V, 2x1.25W+2x38mW(4/32Ω), I2C	BGA-20	39	-	9j	Nsc
GL4	-	LM49101TM	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.3W+2x45mW(4/32Ω), I2C	BGA-25	39	-	9a	Nsc
GL5	-	LM49352RL	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 1.4W+2x69mW+58mW, I2S/PCM	BGA-36	39	-	9a	Nsc
GL6	-	LM48824TM	Lin-IC	AF PA, class-G, 1.8..5.5V, 2x37mW(3V/16Ω), I2C volume	BGA-16	39	-	9a	Nsc
GL7	-	LM49151TL	Lin-IC	AF PA, class-D, 1.8..4.5V, 1.25W+2x42mW(8/32Ω), I2C	BGA-20	39	-	9a	Nsc
gM	-	XC7SET125GF	CMOS-Log	Bus buffer gate with 3-state output	SOT891	52	Log14	9z	Nxp
gM	-	XC7SET125GM	CMOS-Log	Bus buffer gate with 3-state output	SOT886	57	Log14	9z	Nxp
GM	-	MIC2211-1.8/2.8BML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(150mA)/2.8V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
GM	-	MIC5380-2.8/1.8YFT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 150mA, +CE	MLF-6A	81g5	VR19	9x	Mcr
GM	-	R3114K421C	Vdet-IC	4.2V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GM	-	R3134K44EC	Vdet-IC	4.4V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GM2	-	LM48557TL	Lin-IC	AF PA, BTL, 2.6..5.5V, 15.6Vp-p, ceramic speaker, I2C control	BGA-16	39	-	9a	Nsc
GN	-	LM4879IBP	Lin-IC	AF PA, BTL, 2.2..5V, 1.1W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Nsc
GN	-	R3114K431C	Vdet-IC	4.3V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GN	-	R3134K45EC	Vdet-IC	4.5V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GN	-	RT9198-30GQW	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	WDFN-6	49xu	VR4	9a	Rct
GN7	-	LM49155TL	Lin-IC	AF PA, BTL, class-D, 2..5.5V, 2x1.35W(8Ω)+2x19mW(32Ω), I2C, ALC	BGA-36	39	-	9a	Nsc
GN9	-	LM49251TL	Lin-IC	AF PA, BTL, 2.7..5.5V, class-D, 2x1.37W(8Ω)+2x20mW(32Ω), I2C	BGA-30	39	-	9j	Nsc
GO	-	MIC2211-1.8/2.9BML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(150mA)/2.9V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
GO7	-	LM49153TM	Lin-IC	AF PA, BTL, 2.7..5.5V, class-D 1.35W(8Ω)+2x25mW(32Ω), I2C	BGA-25	39	-	9j	Nsc
GP	-	EMA1001IBPX	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	AFP44	9k	Emp
GP	-	LD6805K/18P	LVR-IC	LDO, 1.8V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
GP	-	LM4890IBL	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Nsc
GP	-	MIC2211-1.8/3.0BML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(150mA)/3.0V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
GP	-	R3114K441C	Vdet-IC	4.4V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GP	-	R3134K46EC	Vdet-IC	4.6V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GPF	-	MIC5335-1.8/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.5V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
GPG	-	MIC5335-1.8/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.8V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
GPW	-	MIC5335-1.8/1.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.6V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
GQ	-	LM4901IBL	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.6W(5V/8Ω), shutdown	BGA-9	39	-	9a	Nsc
GQ	-	R3114K451C	Vdet-IC	4.5V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GR	-	R3114K461C	Vdet-IC	4.6V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GR	-	R3134K47EC	Vdet-IC	4.7V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GS	-	MIC2211-1.8/3.3BML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V(150mA)/3.3V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
GS	-	R3114K471C	Vdet-IC	4.7V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GS	-	R3134K48EC	Vdet-IC	4.8V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GT	-	R3114K481C	Vdet-IC	4.8V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GT	-	R3134K49EC	Vdet-IC	4.9V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GT33G	-	AIC1952-33GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT34G	-	AIC1952-34GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT35G	-	AIC1952-35GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT36G	-	AIC1952-36GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT37G	-	AIC1952-37GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT38G	-	AIC1952-38GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3AG	-	AIC1952-3AGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3BG	-	AIC1952-3BGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3CG	-	AIC1952-3CGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3DG	-	AIC1952-3DGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3EG	-	AIC1952-3EGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3FG	-	AIC1952-3FGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3GG	-	AIC1952-3GGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3HG	-	AIC1952-3HGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3IG	-	AIC1952-3IGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3JG	-	AIC1952-3JGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3KG	-	AIC1952-3KGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3LG	-	AIC1952-3LGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3MG	-	AIC1952-3MGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3NG	-	AIC1952-3NGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3OG	-	AIC1952-3OGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3PG	-	AIC1952-3PGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3QG	-	AIC1952-3QGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3RG	-	AIC1952-3RGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3SG	-	AIC1952-3SGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3TG	-	AIC1952-3TGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3UG	-	AIC1952-3UGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3VG	-	AIC1952-3VGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3WG	-	AIC1952-3WGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3XG	-	AIC1952-3XGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT3YG	-	AIC1952-3YGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GT3ZG	-	AIC1952-3ZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT43G	-	AIC1952-43GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT44G	-	AIC1952-44GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT45G	-	AIC1952-45GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT46G	-	AIC1952-46GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT47G	-	AIC1952-47GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT48G	-	AIC1952-48GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4AG	-	AIC1952-4AGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4BG	-	AIC1952-4BGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4CG	-	AIC1952-4CGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4DG	-	AIC1952-4DGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4EG	-	AIC1952-4EGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4FG	-	AIC1952-4FGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4GG	-	AIC1952-4GGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4HG	-	AIC1952-4HGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4IG	-	AIC1952-4IGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4JG	-	AIC1952-4JGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4KG	-	AIC1952-4KGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4LG	-	AIC1952-4LGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4MG	-	AIC1952-4MGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4NG	-	AIC1952-4NGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4OG	-	AIC1952-4OGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4PG	-	AIC1952-4PGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4QG	-	AIC1952-4QGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4RG	-	AIC1952-4RGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4SG	-	AIC1952-4SGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4TG	-	AIC1952-4TGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4UG	-	AIC1952-4UGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4VG	-	AIC1952-4VGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4WG	-	AIC1952-4WGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4XG	-	AIC1952-4XGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4YG	-	AIC1952-4YGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT4ZG	-	AIC1952-4ZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.4V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT53G	-	AIC1952-53GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT54G	-	AIC1952-54GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT55G	-	AIC1952-55GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT56G	-	AIC1952-56GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT57G	-	AIC1952-57GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT58G	-	AIC1952-58GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5AG	-	AIC1952-5AGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5BG	-	AIC1952-5BGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5CG	-	AIC1952-5CGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5DG	-	AIC1952-5DGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5EG	-	AIC1952-5EGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5FG	-	AIC1952-5FGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5GG	-	AIC1952-5GGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5HG	-	AIC1952-5HGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5IG	-	AIC1952-5IGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5JG	-	AIC1952-5JGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5KG	-	AIC1952-5KGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5LG	-	AIC1952-5LGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5MG	-	AIC1952-5MGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5NG	-	AIC1952-5NGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5OG	-	AIC1952-5OGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5PG	-	AIC1952-5PGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5QG	-	AIC1952-5QGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5RG	-	AIC1952-5RGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5SG	-	AIC1952-5SGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5TG	-	AIC1952-5TGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5UG	-	AIC1952-5UGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5VG	-	AIC1952-5VGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5WG	-	AIC1952-5WGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5XG	-	AIC1952-5XGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5YG	-	AIC1952-5YGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT5ZG	-	AIC1952-5ZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.5V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT63G	-	AIC1952-63GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT64G	-	AIC1952-64GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT65G	-	AIC1952-65GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT66G	-	AIC1952-66GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT67G	-	AIC1952-67GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GT68G	-	AIC1952-68GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6AG	-	AIC1952-6AGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6BG	-	AIC1952-6BGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6CG	-	AIC1952-6CGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6DG	-	AIC1952-6DGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6EG	-	AIC1952-6EGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6FG	-	AIC1952-6FGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6GG	-	AIC1952-6GGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6HG	-	AIC1952-6HGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6IG	-	AIC1952-6IGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6JG	-	AIC1952-6JGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6KG	-	AIC1952-6KGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6LG	-	AIC1952-6LGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6MG	-	AIC1952-6MGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6NG	-	AIC1952-6NGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6OG	-	AIC1952-6OGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6PG	-	AIC1952-6PGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6QG	-	AIC1952-6QGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6RG	-	AIC1952-6RGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6SG	-	AIC1952-6SGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6TG	-	AIC1952-6TGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6UG	-	AIC1952-6UGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6VG	-	AIC1952-6VGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6WG	-	AIC1952-6WGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6XG	-	AIC1952-6XGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6YG	-	AIC1952-6YGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT6ZG	-	AIC1952-6ZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.6V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT73G	-	AIC1952-73GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT74G	-	AIC1952-74GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT75G	-	AIC1952-75GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT76G	-	AIC1952-76GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT77G	-	AIC1952-77GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT78G	-	AIC1952-78GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7AG	-	AIC1952-7AGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7BG	-	AIC1952-7BGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7CG	-	AIC1952-7CGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7DG	-	AIC1952-7DGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7EG	-	AIC1952-7EGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7FG	-	AIC1952-7FGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7GG	-	AIC1952-7GGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7HG	-	AIC1952-7HGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7IG	-	AIC1952-7IGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7JG	-	AIC1952-7JGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7KG	-	AIC1952-7KGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7LG	-	AIC1952-7LGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7MG	-	AIC1952-7MGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7NG	-	AIC1952-7NGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7OG	-	AIC1952-7OGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7PG	-	AIC1952-7PGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7QG	-	AIC1952-7QGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7RG	-	AIC1952-7RGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7SG	-	AIC1952-7SGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7TG	-	AIC1952-7TGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7UG	-	AIC1952-7UGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7VG	-	AIC1952-7VGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7WG	-	AIC1952-7WGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7XG	-	AIC1952-7XGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7YG	-	AIC1952-7YGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT7ZG	-	AIC1952-7ZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.7V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT83G	-	AIC1952-83GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT84G	-	AIC1952-84GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT85G	-	AIC1952-85GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT86G	-	AIC1952-86GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT87G	-	AIC1952-87GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT88G	-	AIC1952-88GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8AG	-	AIC1952-8AGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8BG	-	AIC1952-8BGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8CG	-	AIC1952-8CGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8DG	-	AIC1952-8DGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8EG	-	AIC1952-8EGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GT8FG	-	AIC1952-8FGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8GG	-	AIC1952-8GGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8HG	-	AIC1952-8HGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8IG	-	AIC1952-8IGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8JG	-	AIC1952-8JGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8KG	-	AIC1952-8KGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8LG	-	AIC1952-8LGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8MG	-	AIC1952-8MGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8NG	-	AIC1952-8NGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8OG	-	AIC1952-8OGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8PG	-	AIC1952-8PGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8QG	-	AIC1952-8QGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8RG	-	AIC1952-8RGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8SG	-	AIC1952-8SGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8TG	-	AIC1952-8TGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8UG	-	AIC1952-8UGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8VG	-	AIC1952-8VGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8WG	-	AIC1952-8WGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8XG	-	AIC1952-8XGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8YG	-	AIC1952-8YGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GT8ZG	-	AIC1952-8ZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.8V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTA3G	-	AIC1952-A3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTA4G	-	AIC1952-A4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTA5G	-	AIC1952-A5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTA6G	-	AIC1952-A6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTA7G	-	AIC1952-A7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTA8G	-	AIC1952-A8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAAG	-	AIC1952-AAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTABG	-	AIC1952-ABGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTACG	-	AIC1952-ACGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTADG	-	AIC1952-ADGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAEG	-	AIC1952-AEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAFG	-	AIC1952-AFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAGG	-	AIC1952-AGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAHG	-	AIC1952-AHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAIG	-	AIC1952-AIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAJG	-	AIC1952-AJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAKG	-	AIC1952-AKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTALG	-	AIC1952-ALGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAMG	-	AIC1952-AMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTANG	-	AIC1952-ANGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAOG	-	AIC1952-AOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAPG	-	AIC1952-APGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAQG	-	AIC1952-AQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTARG	-	AIC1952-ARGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTASG	-	AIC1952-ASGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTATG	-	AIC1952-ATGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAUG	-	AIC1952-AUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAVG	-	AIC1952-AVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAWG	-	AIC1952-AWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAXG	-	AIC1952-AXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAYG	-	AIC1952-AYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTAZG	-	AIC1952-AZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.8V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTB3G	-	AIC1952-B3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTB4G	-	AIC1952-B4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTB5G	-	AIC1952-B5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTB6G	-	AIC1952-B6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTB7G	-	AIC1952-B7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTB8G	-	AIC1952-B8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBAG	-	AIC1952-BAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBBG	-	AIC1952-BBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBCG	-	AIC1952-BCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBDG	-	AIC1952-BDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBEG	-	AIC1952-BEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBFG	-	AIC1952-BFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBGG	-	AIC1952-BGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBHG	-	AIC1952-BHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBIG	-	AIC1952-BIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBJG	-	AIC1952-BJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBKG	-	AIC1952-BKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GTBLG	-	AIC1952-BLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBMG	-	AIC1952-BMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBNG	-	AIC1952-BNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBOG	-	AIC1952-BOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBPG	-	AIC1952-BPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBQG	-	AIC1952-BQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBRG	-	AIC1952-BRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBSG	-	AIC1952-BSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBTG	-	AIC1952-BTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBUG	-	AIC1952-BUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBVG	-	AIC1952-BVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBWG	-	AIC1952-BWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBXG	-	AIC1952-BXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBYG	-	AIC1952-BYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTBZG	-	AIC1952-BZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=0.9V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTC3G	-	AIC1952-C3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTC4G	-	AIC1952-C4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTC5G	-	AIC1952-C5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTC6G	-	AIC1952-C6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTC7G	-	AIC1952-C7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTC8G	-	AIC1952-C8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCAG	-	AIC1952-CAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCBG	-	AIC1952-CBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCCG	-	AIC1952-CCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCDG	-	AIC1952-CDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCEG	-	AIC1952-CEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCFG	-	AIC1952-CFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCGG	-	AIC1952-CGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCHG	-	AIC1952-CHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCIG	-	AIC1952-CIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCJG	-	AIC1952-CJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCKG	-	AIC1952-CKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCLG	-	AIC1952-CLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCMG	-	AIC1952-CMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCNG	-	AIC1952-CNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCOG	-	AIC1952-COGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCPG	-	AIC1952-CPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCQG	-	AIC1952-CQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCRG	-	AIC1952-CRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCSG	-	AIC1952-CSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCTG	-	AIC1952-CTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCUG	-	AIC1952-CUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCVG	-	AIC1952-CVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCWG	-	AIC1952-CWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCXG	-	AIC1952-CXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCYG	-	AIC1952-CYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTCZG	-	AIC1952-CZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.0V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTD3G	-	AIC1952-D3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTD4G	-	AIC1952-D4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTD5G	-	AIC1952-D5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTD6G	-	AIC1952-D6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTD7G	-	AIC1952-D7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTD8G	-	AIC1952-D8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDAG	-	AIC1952-DAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDBG	-	AIC1952-DBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDCG	-	AIC1952-DCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDDG	-	AIC1952-DDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDEG	-	AIC1952-DEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDFG	-	AIC1952-DFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDGG	-	AIC1952-DGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDHG	-	AIC1952-DHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDIG	-	AIC1952-DIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDJG	-	AIC1952-DJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDKG	-	AIC1952-DKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDLG	-	AIC1952-DLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDMG	-	AIC1952-DMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDNG	-	AIC1952-DNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDOG	-	AIC1952-DOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDPG	-	AIC1952-DPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDQG	-	AIC1952-DQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GTDRG	-	AIC1952-DRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDSG	-	AIC1952-DSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDTG	-	AIC1952-DTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDUG	-	AIC1952-DUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDVG	-	AIC1952-DVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDWG	-	AIC1952-DWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDXG	-	AIC1952-DXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDYG	-	AIC1952-DYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTDZG	-	AIC1952-DZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTE3G	-	AIC1952-E3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTE4G	-	AIC1952-E4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTE5G	-	AIC1952-E5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTE6G	-	AIC1952-E6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTE7G	-	AIC1952-E7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTE8G	-	AIC1952-E8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEAG	-	AIC1952-EAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEBG	-	AIC1952-EBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTECG	-	AIC1952-ECGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEDG	-	AIC1952-EDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEEG	-	AIC1952-EEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEFG	-	AIC1952-EFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEGG	-	AIC1952-EGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEHG	-	AIC1952-EHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEIG	-	AIC1952-EIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEJG	-	AIC1952-EJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEKG	-	AIC1952-EKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTELG	-	AIC1952-ELGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEMG	-	AIC1952-EMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTENG	-	AIC1952-ENGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEOG	-	AIC1952-EOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEPG	-	AIC1952-EPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEQG	-	AIC1952-EQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTERG	-	AIC1952-ERGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTESG	-	AIC1952-ESGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTETG	-	AIC1952-ETGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEUG	-	AIC1952-EUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEVG	-	AIC1952-EVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEWG	-	AIC1952-EWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEXG	-	AIC1952-EXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEYG	-	AIC1952-EYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTEZG	-	AIC1952-EZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTF3G	-	AIC1952-F3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTF4G	-	AIC1952-F4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTF5G	-	AIC1952-F5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTF6G	-	AIC1952-F6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTF7G	-	AIC1952-F7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTF8G	-	AIC1952-F8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFAG	-	AIC1952-FAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFBG	-	AIC1952-FBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFCG	-	AIC1952-FCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFDG	-	AIC1952-FDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFEG	-	AIC1952-FEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFFG	-	AIC1952-FFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFGG	-	AIC1952-FGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFHG	-	AIC1952-FHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFIG	-	AIC1952-FIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFJG	-	AIC1952-FJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFKG	-	AIC1952-FKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFLG	-	AIC1952-FLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFMG	-	AIC1952-FMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFNG	-	AIC1952-FNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFOG	-	AIC1952-FOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFPG	-	AIC1952-FPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFQG	-	AIC1952-FQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFRG	-	AIC1952-FRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFSG	-	AIC1952-FSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFTG	-	AIC1952-FTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFUG	-	AIC1952-FUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFVG	-	AIC1952-FVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFWG	-	AIC1952-FWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GTFXG	-	AIC1952-FXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFYG	-	AIC1952-FYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTFZG	-	AIC1952-FZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTG3G	-	AIC1952-G3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTG4G	-	AIC1952-G4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTG5G	-	AIC1952-G5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTG6G	-	AIC1952-G6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTG7G	-	AIC1952-G7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTG8G	-	AIC1952-G8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGAG	-	AIC1952-GAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGBG	-	AIC1952-GBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGCG	-	AIC1952-GCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGDG	-	AIC1952-GDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGEG	-	AIC1952-GEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGFG	-	AIC1952-GFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGGG	-	AIC1952-GGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGHG	-	AIC1952-GHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGIG	-	AIC1952-GIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGJG	-	AIC1952-GJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGKG	-	AIC1952-GKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGLG	-	AIC1952-GLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGMG	-	AIC1952-GMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGNG	-	AIC1952-GNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGOG	-	AIC1952-GOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGPG	-	AIC1952-GPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGQG	-	AIC1952-GQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGRG	-	AIC1952-GRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGSG	-	AIC1952-GSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGTG	-	AIC1952-GTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGUG	-	AIC1952-GUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGVG	-	AIC1952-GVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGWG	-	AIC1952-GWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGXG	-	AIC1952-GXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGYG	-	AIC1952-GYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTGZG	-	AIC1952-GZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.4V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTH3G	-	AIC1952-H3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTH4G	-	AIC1952-H4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTH5G	-	AIC1952-H5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTH6G	-	AIC1952-H6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTH7G	-	AIC1952-H7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTH8G	-	AIC1952-H8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHAG	-	AIC1952-HAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHBG	-	AIC1952-HBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHCG	-	AIC1952-HCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHDG	-	AIC1952-HDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHEG	-	AIC1952-HEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHFG	-	AIC1952-HFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHGG	-	AIC1952-HGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHHG	-	AIC1952-HHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHIG	-	AIC1952-HIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHJG	-	AIC1952-HJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHKG	-	AIC1952-HKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHLG	-	AIC1952-HLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHMG	-	AIC1952-HMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHNG	-	AIC1952-HNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHOG	-	AIC1952-HOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHPG	-	AIC1952-HPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHQG	-	AIC1952-HQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHRG	-	AIC1952-HRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHSG	-	AIC1952-HSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHTG	-	AIC1952-HTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHUG	-	AIC1952-HUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHVG	-	AIC1952-HVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHWG	-	AIC1952-HWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHXG	-	AIC1952-HXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHYG	-	AIC1952-HYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTHZG	-	AIC1952-HZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTI3G	-	AIC1952-I3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTI4G	-	AIC1952-I4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTI5G	-	AIC1952-I5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GTI6G	-	AIC1952-I6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTI7G	-	AIC1952-I7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTI8G	-	AIC1952-I8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIAG	-	AIC1952-IAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIBG	-	AIC1952-IBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTICG	-	AIC1952-ICGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIDG	-	AIC1952-IDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIEG	-	AIC1952-IEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIFG	-	AIC1952-IFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIGG	-	AIC1952-IGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIHG	-	AIC1952-IHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIIG	-	AIC1952-IIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIJG	-	AIC1952-IJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIKG	-	AIC1952-IKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTILG	-	AIC1952-ILGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIMG	-	AIC1952-IMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTING	-	AIC1952-INGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIOG	-	AIC1952-IOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIPG	-	AIC1952-IPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIQG	-	AIC1952-IQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIRG	-	AIC1952-IRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTISG	-	AIC1952-ISGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTITG	-	AIC1952-ITGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIUG	-	AIC1952-IUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIVG	-	AIC1952-IVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIWG	-	AIC1952-IWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIXG	-	AIC1952-IXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIYG	-	AIC1952-IYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTIZG	-	AIC1952-IZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJ3G	-	AIC1952-J3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJ4G	-	AIC1952-J4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJ5G	-	AIC1952-J5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJ6G	-	AIC1952-J6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJ7G	-	AIC1952-J7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJ8G	-	AIC1952-J8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJAG	-	AIC1952-JAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJBG	-	AIC1952-JBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJCG	-	AIC1952-JCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJDG	-	AIC1952-JDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJEG	-	AIC1952-JEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJFG	-	AIC1952-JFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJGG	-	AIC1952-JGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJHG	-	AIC1952-JHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJIG	-	AIC1952-JIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJJG	-	AIC1952-JJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJKG	-	AIC1952-JKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJLG	-	AIC1952-JLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJMG	-	AIC1952-JMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJNG	-	AIC1952-JNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJOG	-	AIC1952-JOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJPG	-	AIC1952-JPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJQG	-	AIC1952-JQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJRG	-	AIC1952-JRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJSG	-	AIC1952-JSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJTG	-	AIC1952-JTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJUG	-	AIC1952-JUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJVG	-	AIC1952-JVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJWG	-	AIC1952-JWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJXG	-	AIC1952-JXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJYG	-	AIC1952-JYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTJZG	-	AIC1952-JZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTK3G	-	AIC1952-K3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTK4G	-	AIC1952-K4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTK5G	-	AIC1952-K5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTK6G	-	AIC1952-K6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTK7G	-	AIC1952-K7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTK8G	-	AIC1952-K8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKAG	-	AIC1952-KAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKBG	-	AIC1952-KBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKCG	-	AIC1952-KCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GTKDG	-	AIC1952-KDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKEG	-	AIC1952-KEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKFG	-	AIC1952-KFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKGG	-	AIC1952-KGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKHG	-	AIC1952-KHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKIG	-	AIC1952-KIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKJG	-	AIC1952-KJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKKG	-	AIC1952-KKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKLG	-	AIC1952-KLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKMG	-	AIC1952-KMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKNG	-	AIC1952-KNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKOG	-	AIC1952-KOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKPG	-	AIC1952-KPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKQG	-	AIC1952-KQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKRG	-	AIC1952-KRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKSG	-	AIC1952-KSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKTG	-	AIC1952-KTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKUG	-	AIC1952-KUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKVG	-	AIC1952-KVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKWG	-	AIC1952-KWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKXG	-	AIC1952-KXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKYG	-	AIC1952-KYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTKZG	-	AIC1952-KZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTL3G	-	AIC1952-L3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTL4G	-	AIC1952-L4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTL5G	-	AIC1952-L5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTL6G	-	AIC1952-L6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTL7G	-	AIC1952-L7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTL8G	-	AIC1952-L8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLAG	-	AIC1952-LAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLBG	-	AIC1952-LBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLCG	-	AIC1952-LCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLDG	-	AIC1952-LDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLEG	-	AIC1952-LEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLFG	-	AIC1952-LFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLGG	-	AIC1952-LGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLHG	-	AIC1952-LHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLIG	-	AIC1952-LIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLJG	-	AIC1952-LJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLKG	-	AIC1952-LKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLLG	-	AIC1952-LLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLMG	-	AIC1952-LMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLNG	-	AIC1952-LNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLOG	-	AIC1952-LOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLPG	-	AIC1952-LPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLQG	-	AIC1952-LQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLRG	-	AIC1952-LRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLSG	-	AIC1952-LSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLTG	-	AIC1952-LTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLUG	-	AIC1952-LUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLVG	-	AIC1952-LVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLWG	-	AIC1952-LWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLXG	-	AIC1952-LXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLYG	-	AIC1952-LYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTLZG	-	AIC1952-LZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTM3G	-	AIC1952-M3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTM4G	-	AIC1952-M4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTM5G	-	AIC1952-M5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTM6G	-	AIC1952-M6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTM7G	-	AIC1952-M7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTM8G	-	AIC1952-M8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMAG	-	AIC1952-MAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMBG	-	AIC1952-MBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMCG	-	AIC1952-MCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMDG	-	AIC1952-MDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMEG	-	AIC1952-MEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMFG	-	AIC1952-MFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMGG	-	AIC1952-MGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMHG	-	AIC1952-MHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMIG	-	AIC1952-MIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GTMJG	-	AIC1952-MJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMKG	-	AIC1952-MKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMLG	-	AIC1952-MLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMMG	-	AIC1952-MMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMNG	-	AIC1952-MNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMOG	-	AIC1952-MOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMPG	-	AIC1952-MPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMQG	-	AIC1952-MQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMRG	-	AIC1952-MRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMSG	-	AIC1952-MSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMTG	-	AIC1952-MTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMUG	-	AIC1952-MUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMVG	-	AIC1952-MVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMWG	-	AIC1952-MWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMXG	-	AIC1952-MXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMYG	-	AIC1952-MYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTMZG	-	AIC1952-MZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTN3G	-	AIC1952-N3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTN4G	-	AIC1952-N4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTN5G	-	AIC1952-N5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTN6G	-	AIC1952-N6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTN7G	-	AIC1952-N7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTN8G	-	AIC1952-N8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNAG	-	AIC1952-NAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNBG	-	AIC1952-NBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNCG	-	AIC1952-NCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNDG	-	AIC1952-NDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNEG	-	AIC1952-NEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNFG	-	AIC1952-NFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNGG	-	AIC1952-NGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNHG	-	AIC1952-NHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNIG	-	AIC1952-NIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNJG	-	AIC1952-NJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNKG	-	AIC1952-NKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNLG	-	AIC1952-NLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNMG	-	AIC1952-NMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNNG	-	AIC1952-NNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNOG	-	AIC1952-NOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNPG	-	AIC1952-NPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNQG	-	AIC1952-NQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNRG	-	AIC1952-NRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNSG	-	AIC1952-NSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNTG	-	AIC1952-NTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNUG	-	AIC1952-NUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNVG	-	AIC1952-NVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNWG	-	AIC1952-NWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNXG	-	AIC1952-NXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNYG	-	AIC1952-NYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTNZG	-	AIC1952-NZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTO3G	-	AIC1952-O3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTO4G	-	AIC1952-O4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTO5G	-	AIC1952-O5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTO6G	-	AIC1952-O6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTO7G	-	AIC1952-O7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTO8G	-	AIC1952-O8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOAG	-	AIC1952-OAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOBG	-	AIC1952-OBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOCG	-	AIC1952-OCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTODG	-	AIC1952-ODGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOEG	-	AIC1952-OEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOFG	-	AIC1952-OFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOGG	-	AIC1952-OGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOHG	-	AIC1952-OHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOIG	-	AIC1952-OIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOJG	-	AIC1952-OJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOKG	-	AIC1952-OKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOLG	-	AIC1952-OLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOMG	-	AIC1952-OMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTONG	-	AIC1952-ONGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOOG	-	AIC1952-OOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GTOPG	-	AIC1952-OPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOQG	-	AIC1952-OQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTORG	-	AIC1952-ORGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOSG	-	AIC1952-OSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOTG	-	AIC1952-OTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOUG	-	AIC1952-OUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOVG	-	AIC1952-OVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOWG	-	AIC1952-OWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOXG	-	AIC1952-OXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOYG	-	AIC1952-OYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTOZG	-	AIC1952-OZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTP3G	-	AIC1952-P3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTP4G	-	AIC1952-P4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTP5G	-	AIC1952-P5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTP6G	-	AIC1952-P6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTP7G	-	AIC1952-P7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTP8G	-	AIC1952-P8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPAG	-	AIC1952-PAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPBG	-	AIC1952-PBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPCG	-	AIC1952-PCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPDG	-	AIC1952-PDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPEG	-	AIC1952-PEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPFG	-	AIC1952-PFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPGG	-	AIC1952-PGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPHG	-	AIC1952-PHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPIG	-	AIC1952-PIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPJG	-	AIC1952-PJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPKG	-	AIC1952-PKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPLG	-	AIC1952-PLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPMG	-	AIC1952-PMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPNG	-	AIC1952-PNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPOG	-	AIC1952-POGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPPG	-	AIC1952-PPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPQG	-	AIC1952-PQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPRG	-	AIC1952-PRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPSG	-	AIC1952-PSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPTG	-	AIC1952-PTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPUG	-	AIC1952-PUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPVG	-	AIC1952-PVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPWG	-	AIC1952-PWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPXG	-	AIC1952-PXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPYG	-	AIC1952-PYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTPZG	-	AIC1952-PZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQ3G	-	AIC1952-Q3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQ4G	-	AIC1952-Q4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQ5G	-	AIC1952-Q5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQ6G	-	AIC1952-Q6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQ7G	-	AIC1952-Q7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQ8G	-	AIC1952-Q8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQAG	-	AIC1952-QAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQBG	-	AIC1952-QBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQCG	-	AIC1952-QCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQDG	-	AIC1952-QDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQEG	-	AIC1952-QEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQFG	-	AIC1952-QFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQGG	-	AIC1952-QGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQHG	-	AIC1952-QHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQIG	-	AIC1952-QIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQJG	-	AIC1952-QJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQKG	-	AIC1952-QKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQLG	-	AIC1952-QLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQMG	-	AIC1952-QMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQNG	-	AIC1952-QNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQOG	-	AIC1952-QOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQPG	-	AIC1952-QPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQQG	-	AIC1952-QQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQRG	-	AIC1952-QRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQSG	-	AIC1952-QSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQTG	-	AIC1952-QTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQUG	-	AIC1952-QUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GTQVG	-	AIC1952-QVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQWG	-	AIC1952-QWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQXG	-	AIC1952-QXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQYG	-	AIC1952-QYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTQZG	-	AIC1952-QZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTR3G	-	AIC1952-R3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTR4G	-	AIC1952-R4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTR5G	-	AIC1952-R5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTR6G	-	AIC1952-R6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTR7G	-	AIC1952-R7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTR8G	-	AIC1952-R8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRAG	-	AIC1952-RAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRBG	-	AIC1952-RBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRCG	-	AIC1952-RCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRDG	-	AIC1952-RDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTREG	-	AIC1952-REGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRFG	-	AIC1952-RFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRGG	-	AIC1952-RGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRHG	-	AIC1952-RHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRIG	-	AIC1952-RIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRJG	-	AIC1952-RJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRKG	-	AIC1952-RKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRLG	-	AIC1952-RLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRMG	-	AIC1952-RMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRNG	-	AIC1952-RNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTROG	-	AIC1952-ROGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRPG	-	AIC1952-RPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRQG	-	AIC1952-RQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRRG	-	AIC1952-RRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRSG	-	AIC1952-RSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRTG	-	AIC1952-RTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRUG	-	AIC1952-RUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRVG	-	AIC1952-RVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRWG	-	AIC1952-RWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRXG	-	AIC1952-RXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRYG	-	AIC1952-RYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTRZG	-	AIC1952-RZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTS3G	-	AIC1952-S3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTS4G	-	AIC1952-S4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTS5G	-	AIC1952-S5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTS6G	-	AIC1952-S6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTS7G	-	AIC1952-S7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTS8G	-	AIC1952-S8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSAG	-	AIC1952-SAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSBG	-	AIC1952-SBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSCG	-	AIC1952-SCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSDG	-	AIC1952-SDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSEG	-	AIC1952-SEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSFG	-	AIC1952-SFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSGG	-	AIC1952-SGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSHG	-	AIC1952-SHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSIG	-	AIC1952-SIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSJG	-	AIC1952-SJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSKG	-	AIC1952-SKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSLG	-	AIC1952-SLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSMG	-	AIC1952-SMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSNG	-	AIC1952-SNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSOG	-	AIC1952-SOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSPG	-	AIC1952-SPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSQG	-	AIC1952-SQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSRG	-	AIC1952-SRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSSG	-	AIC1952-SSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSTG	-	AIC1952-STGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSUG	-	AIC1952-SUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSVG	-	AIC1952-SVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSWG	-	AIC1952-SWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSXG	-	AIC1952-SXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSYG	-	AIC1952-SYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTSZG	-	AIC1952-SZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTT3G	-	AIC1952-T3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GTT4G	-	AIC1952-T4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTT5G	-	AIC1952-T5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTT6G	-	AIC1952-T6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTT7G	-	AIC1952-T7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTT8G	-	AIC1952-T8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTAG	-	AIC1952-TAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTBG	-	AIC1952-TBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTCG	-	AIC1952-TCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTDG	-	AIC1952-TDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTEG	-	AIC1952-TEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTFG	-	AIC1952-TFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTGG	-	AIC1952-TGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTHG	-	AIC1952-THGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTIG	-	AIC1952-TIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTJG	-	AIC1952-TJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTKG	-	AIC1952-TKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTLG	-	AIC1952-TLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTMG	-	AIC1952-TMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTNG	-	AIC1952-TNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTOG	-	AIC1952-TOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTPG	-	AIC1952-TPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTQG	-	AIC1952-TQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTRG	-	AIC1952-TRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTSG	-	AIC1952-TSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTTG	-	AIC1952-TTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTUG	-	AIC1952-TUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTVG	-	AIC1952-TVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTWG	-	AIC1952-TWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTXG	-	AIC1952-TXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTYG	-	AIC1952-TYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTTZG	-	AIC1952-TZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTU3G	-	AIC1952-U3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTU4G	-	AIC1952-U4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTU5G	-	AIC1952-U5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTU6G	-	AIC1952-U6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTU7G	-	AIC1952-U7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTU8G	-	AIC1952-U8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUAG	-	AIC1952-UAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUBG	-	AIC1952-UBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUCG	-	AIC1952-UCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUDG	-	AIC1952-UDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUEG	-	AIC1952-UEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUFG	-	AIC1952-UFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUGG	-	AIC1952-UGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUHG	-	AIC1952-UHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUIG	-	AIC1952-UIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUJG	-	AIC1952-UJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUKG	-	AIC1952-UKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTULG	-	AIC1952-ULGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUMG	-	AIC1952-UMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUNG	-	AIC1952-UNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUOG	-	AIC1952-UOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUPG	-	AIC1952-UPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUQG	-	AIC1952-UQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTURG	-	AIC1952-URGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUSG	-	AIC1952-USGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUTG	-	AIC1952-UTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUUG	-	AIC1952-UUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUVG	-	AIC1952-UVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUWG	-	AIC1952-UWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUXG	-	AIC1952-UXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUYG	-	AIC1952-UYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTUZG	-	AIC1952-UZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTV3G	-	AIC1952-V3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTV4G	-	AIC1952-V4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTV5G	-	AIC1952-V5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTV6G	-	AIC1952-V6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTV7G	-	AIC1952-V7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTV8G	-	AIC1952-V8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVAG	-	AIC1952-VAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GTVBG	-	AIC1952-VBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVCG	-	AIC1952-VCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVDG	-	AIC1952-VDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVEG	-	AIC1952-VEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVFG	-	AIC1952-VFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVGG	-	AIC1952-VGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVHG	-	AIC1952-VHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVIG	-	AIC1952-VIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVJG	-	AIC1952-VJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVKG	-	AIC1952-VKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVLG	-	AIC1952-VLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVMG	-	AIC1952-VMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVNG	-	AIC1952-VNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVOG	-	AIC1952-VOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVPG	-	AIC1952-VPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVQG	-	AIC1952-VQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVRG	-	AIC1952-VRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVSG	-	AIC1952-VSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVTG	-	AIC1952-VTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVUG	-	AIC1952-VUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVVG	-	AIC1952-VVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVWG	-	AIC1952-VWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVXG	-	AIC1952-VXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVYG	-	AIC1952-VYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTVZG	-	AIC1952-VZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTW3G	-	AIC1952-W3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTW4G	-	AIC1952-W4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTW5G	-	AIC1952-W5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTW6G	-	AIC1952-W6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTW7G	-	AIC1952-W7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTW8G	-	AIC1952-W8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWAG	-	AIC1952-WAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWBG	-	AIC1952-WBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWCG	-	AIC1952-WCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWDG	-	AIC1952-WDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWEG	-	AIC1952-WEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWFG	-	AIC1952-WFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWGG	-	AIC1952-WGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWHG	-	AIC1952-WHGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWIG	-	AIC1952-WIGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWJG	-	AIC1952-WJGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWKG	-	AIC1952-WKGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWLG	-	AIC1952-WLGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWMG	-	AIC1952-WMGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWNG	-	AIC1952-WNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWOG	-	AIC1952-WOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWPG	-	AIC1952-WPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWQG	-	AIC1952-WQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWRG	-	AIC1952-WRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWSG	-	AIC1952-WSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWTG	-	AIC1952-WTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWUG	-	AIC1952-WUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWVG	-	AIC1952-WVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWWG	-	AIC1952-WWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWXG	-	AIC1952-WXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWYG	-	AIC1952-WYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTWZG	-	AIC1952-WZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTX3G	-	AIC1952-X3GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTX4G	-	AIC1952-X4GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTX5G	-	AIC1952-X5GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTX6G	-	AIC1952-X6GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTX7G	-	AIC1952-X7GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTX8G	-	AIC1952-X8GDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTXAG	-	AIC1952-XAGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/0.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTXBG	-	AIC1952-XBGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/0.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTXCG	-	AIC1952-XCGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTXDG	-	AIC1952-XDGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTXEG	-	AIC1952-XEGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTXFG	-	AIC1952-XFGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTXGG	-	AIC1952-XGGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
GTZNG	-	AIC1952-ZNGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTZOG	-	AIC1952-ZOGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTZPG	-	AIC1952-ZPGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTZQG	-	AIC1952-ZQGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTZRG	-	AIC1952-ZRGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTZSG	-	AIC1952-ZSGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTZTG	-	AIC1952-ZTGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTZUG	-	AIC1952-ZUGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTZVG	-	AIC1952-ZVGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTZWG	-	AIC1952-ZWGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTZXG	-	AIC1952-ZXGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTZYG	-	AIC1952-ZYGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GTZZG	-	AIC1952-ZZGDA	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 300mA, +CE	DFN-6L	56xv	VR19	9a	Aic
GU	-	R3114K491C	Vdet-IC	4.9V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GU	-	R3134K50EC	Vdet-IC	5.0V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GU=	-	RT9104GQW	Lin-IC	AF PA, BTL, class-D, 2..5.5V, 2x3W(5V/4Ω), shutdown, DC volume	QFN-16	38	-	9a	Rct
GV	-	R3114K501C	Vdet-IC	5V±0.8%, -Reset PPO	DFN1010-4	48vd9	VD7	9a	Ric
GV	-	R3134K23EC2	Vdet-IC	2.32V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GW	-	R3134K26EC3	Vdet-IC	2.63V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GWZ	mb	MIC5310-1.8/1.6YML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.6V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
GX	-	R3134K29EC3	Vdet-IC	2.93V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GY	-	R3134K30EC8	Vdet-IC	3.08V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
GZ	-	R3134K43EC8	Vdet-IC	4.38V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
h	-	BU25UA3WNVX	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
H	-	HMPP-3860	PIN-diode	RF, Att, 50V±2%, 1A(1µs), <0.2pF, 22Ω(1mA), <80ns	MP	93d	-	9a	Agi
H0	-	R3118K261C	Vdet-IC	2.6V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
H0	-	RP109L281D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
H0	-	XC6221B31B7R	LVR-IC	LDO, 3.15V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
H0	-	XC6223A4019R-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE	USPQ-4B03	48vm	VR4	9a	Tor
H001	-	RP150K001A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H002	-	RP150K002A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=3V/3V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H003	-	RP150K003A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H004	-	RP150K004A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=2.5V/1.8V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H005	-	RP150K005A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H006	-	RP150K006A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H007	-	RP150K007A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H008	-	RP150K008A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H009	-	RP150K009A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H010	-	RP150K010A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=3.3V/3V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H011	-	RP150K011A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H012	-	RP150K012A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=2.7V/3/3V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H013	-	RP150K013A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=1.7V/1.8V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H014	-	RP150K014A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H015	-	RP150K015A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H016	-	RP150K016A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=2.8V/3V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H017	-	RP150K017A	LVR-IC	LDO, LN, Dual out, Vout1/Vout2=1.8V/3V±1%, 300mA, +CE	PLP2020-8	75yv	VR19	9b	Ric
H03	-	XC61GC6002HR	Vdet-IC	6.0V±2%, +Reset PPO	USP-3	17vdc	VD7	9b	Tor
H08	-	XC6220A081ER	LVR-IC	LDO, 0.8V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H09	-	XC6220A091ER	LVR-IC	LDO, 0.9V±20mV, 1A	USP-6C	49vr	VR4	9a	Tor
H0A	-	XC6127N55A7R	Vdet-IC	5.5V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
H0A	-	XC6220A101ER	LVR-IC	LDO, 1.0V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0B	-	XC6127N55B7R	Vdet-IC	5.5V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
H0B	-	XC6220A111ER	LVR-IC	LDO, 1.1V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0C	-	XC6127N55C7R	Vdet-IC	5.5V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
H0C	-	XC6220A121ER	LVR-IC	LDO, 1.2V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0D	-	XC6127N55D7R	Vdet-IC	5.5V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
H0D	-	XC6220A131ER	LVR-IC	LDO, 1.3V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0E	-	XC6127N55E7R	Vdet-IC	5.5V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
H0E	-	XC6220A141ER	LVR-IC	LDO, 1.4V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0F	-	XC6127N55F7R	Vdet-IC	5.5V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
H0F	-	XC6220A151ER	LVR-IC	LDO, 1.5V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0H	-	XC6127N55G7R	Vdet-IC	5.5V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
H0H	-	XC6220A161ER	LVR-IC	LDO, 1.6V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0K	-	XC6127N55H7R	Vdet-IC	5.5V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
H0K	-	XC6220A171ER	LVR-IC	LDO, 1.7V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0L	-	XC6127N55J7R	Vdet-IC	5.5V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
H0L	-	XC6220A181ER	LVR-IC	LDO, 1.8V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0M	-	XC6127N55K7R	Vdet-IC	5.5V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
H0M	-	XC6220A191ER	LVR-IC	LDO, 1.9V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0N	-	XC6220A201ER	LVR-IC	LDO, 2.0V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H0P	-	XC6220A211ER	LVR-IC	LDO, 2.1V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0R	-	XC6220A221ER	LVR-IC	LDO, 2.2V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0S	-	XC6220A231ER	LVR-IC	LDO, 2.3V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0T	-	XC6220A241ER	LVR-IC	LDO, 2.4V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0U	-	XC6220A251ER	LVR-IC	LDO, 2.5V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0V	-	XC6220A261ER	LVR-IC	LDO, 2.6V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0X	-	XC6220A271ER	LVR-IC	LDO, 2.7V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0Y	-	XC6220A281ER	LVR-IC	LDO, 2.8V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H0Z	-	XC6220A291ER	LVR-IC	LDO, 2.9V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1	-	PZU6.2B2L	Z-diode	6.2V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
H1	-	R3118K271C	Vdet-IC	2.7V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
H1	-	RP109L291D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
H1	-	XC6221B32B7R	LVR-IC	LDO, 3.25V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
H1	-	XC6223B4019R-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL	USPQ-4B03	48vm	VR4	9a	Tor
H18	-	XC6220A08BER	LVR-IC	LDO, 0.85V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H19	-	XC6220A09BER	LVR-IC	LDO, 0.95V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1A	-	XC6220A10BER	LVR-IC	LDO, 1.05V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1B	-	XC6220A11BER	LVR-IC	LDO, 1.15V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1C	-	XC6220A12BER	LVR-IC	LDO, 1.25V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1D	-	XC6220A13BER	LVR-IC	LDO, 1.35V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1E	-	XC6220A14BER	LVR-IC	LDO, 1.45V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1F	-	XC6220A15BER	LVR-IC	LDO, 1.55V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1H	-	XC6220A16BER	LVR-IC	LDO, 1.65V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1K	-	XC6220A17BER	LVR-IC	LDO, 1.75V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1L	-	XC6220A18BER	LVR-IC	LDO, 1.85V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1M	-	XC6220A19BER	LVR-IC	LDO, 1.95V±20mV, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1N	-	XC6220A20BER	LVR-IC	LDO, 2.05V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1P	-	XC6220A21BER	LVR-IC	LDO, 2.15V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1R	-	XC6220A22BER	LVR-IC	LDO, 2.25V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1S	-	XC6220A23BER	LVR-IC	LDO, 2.35V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1T	-	XC6220A24BER	LVR-IC	LDO, 2.45V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1U	-	XC6220A25BER	LVR-IC	LDO, 2.55V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1V	-	XC6220A26BER	LVR-IC	LDO, 2.65V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1X	-	XC6220A27BER	LVR-IC	LDO, 2.75V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1Y	-	XC6220A28BER	LVR-IC	LDO, 2.85V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H1Z	-	XC6220A29BER	LVR-IC	LDO, 2.95V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H2	-	LM4985TM	Lin-IC	AF PA, 2.3..5.5V, 2x68mW(5V/16Ω), I2C volume	BGA-12	39	-	9a	Nsc
H2	-	PZU2.4BL	Z-diode	2.4V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
H2	-	R3118K281C	Vdet-IC	2.8V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
H2	-	RP109L301D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
H2	-	XC6221B33B7R	LVR-IC	LDO, 3.35V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
H2	-	XC6223C4019R-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, PDR	USPQ-4B03	48vm	VR4	9a	Tor
H20	-	XC6220A301ER	LVR-IC	LDO, 3.0V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H21	-	XC6220A311ER	LVR-IC	LDO, 3.1V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H22	-	XC6220A321ER	LVR-IC	LDO, 3.2V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H23	-	XC6220A331ER	LVR-IC	LDO, 3.3V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H24	-	XC6220A341ER	LVR-IC	LDO, 3.4V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H25	-	XC6220A351ER	LVR-IC	LDO, 3.5V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H26	-	XC6220A361ER	LVR-IC	LDO, 3.6V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H27	-	XC6220A371ER	LVR-IC	LDO, 3.7V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H28	-	XC6220A381ER	LVR-IC	LDO, 3.8V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H29	-	XC6220A391ER	LVR-IC	LDO, 3.9V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H2A	-	XC6220A401ER	LVR-IC	LDO, 4.0V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H2B	-	XC6220A411ER	LVR-IC	LDO, 4.1V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H2C	-	XC6220A421ER	LVR-IC	LDO, 4.2V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H2D	-	XC6220A431ER	LVR-IC	LDO, 4.3V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H2E	-	XC6220A441ER	LVR-IC	LDO, 4.4V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H2F	-	XC6220A451ER	LVR-IC	LDO, 4.5V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H2H	-	XC6220A461ER	LVR-IC	LDO, 4.6V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H2K	-	XC6220A471ER	LVR-IC	LDO, 4.7V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H2L	-	XC6220A481ER	LVR-IC	LDO, 4.8V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H2M	-	XC6220A491ER	LVR-IC	LDO, 4.9V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H2N	-	XC6220A501ER	LVR-IC	LDO, 5.0V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H3	-	PZU2.7BL	Z-diode	2.7V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
H3	-	R3118K291C	Vdet-IC	2.9V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
H3	-	RP109L311D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
H3	-	XC6221B34B7R	LVR-IC	LDO, 3.45V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
H3	-	XC6223D4019R-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL, PDR	USPQ-4B03	48vm	VR4	9a	Tor
H30	-	XC6220A30BER	LVR-IC	LDO, 3.05V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H31	-	XC6220A31BER	LVR-IC	LDO, 3.15V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H32	-	XC6220A32BER	LVR-IC	LDO, 3.25V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H33	-	XC6220A33BER	LVR-IC	LDO, 3.35V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H34	-	XC6220A34BER	LVR-IC	LDO, 3.45V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H35	-	XC6220A35BER	LVR-IC	LDO, 3.55V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H36	-	XC6220A36BER	LVR-IC	LDO, 3.65V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H37	-	XC6220A37BER	LVR-IC	LDO, 3.75V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H38	-	XC6220A38BER	LVR-IC	LDO, 3.85V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H39	-	XC6220A39BER	LVR-IC	LDO, 3.95V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H3A	-	XC6220A40BER	LVR-IC	LDO, 4.05V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H3B	-	XC6220A41BER	LVR-IC	LDO, 4.15V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H3C	-	XC6220A42BER	LVR-IC	LDO, 4.25V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H3D	-	XC6220A43BER	LVR-IC	LDO, 4.35V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H3E	-	XC6220A44BER	LVR-IC	LDO, 4.45V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H3F	-	XC6220A45BER	LVR-IC	LDO, 4.55V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H3H	-	XC6220A46BER	LVR-IC	LDO, 4.65V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H3K	-	XC6220A47BER	LVR-IC	LDO, 4.75V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H3L	-	XC6220A48BER	LVR-IC	LDO, 4.85V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H3M	-	XC6220A49BER	LVR-IC	LDO, 4.95V±1%, 1A, +CE	USP-6C	49vr	VR4	9a	Tor
H4	-	PZU3.0BL	Z-diode	3.0V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
H4	-	R3118K301C	Vdet-IC	3.0V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
H4	-	RP109L321D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
H4	-	XC6221B35B7R	LVR-IC	LDO, 3.55V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
H4	-	XC6223E4019R-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, ICP	USPQ-4B03	48vm	VR4	9a	Tor
H48	-	XC6220B081ER	LVR-IC	LDO, 0.8V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H49	-	XC6220B091ER	LVR-IC	LDO, 0.9V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4988SQ	-	STH4988SQ	Lin-IC	AF PA, BTL, 2.4..5.5V, 2x2.1W(5V/8Ω), 3D, shutdown	QFN-24	38	-	9a	Sit
H4A	-	XC6220B101ER	LVR-IC	LDO, 1.0V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4B	-	XC6220B111ER	LVR-IC	LDO, 1.1V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4C	-	XC6220B121ER	LVR-IC	LDO, 1.2V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4D	-	XC6220B131ER	LVR-IC	LDO, 1.3V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4E	-	XC6220B141ER	LVR-IC	LDO, 1.4V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4F	-	MIC5320-2.4/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.4V/1.5V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
H4F	-	XC6220B151ER	LVR-IC	LDO, 1.5V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4H	-	XC6220B161ER	LVR-IC	LDO, 1.6V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4K	-	XC6220B171ER	LVR-IC	LDO, 1.7V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4L	-	XC6220B181ER	LVR-IC	LDO, 1.8V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4M	-	XC6220B191ER	LVR-IC	LDO, 1.9V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4N	-	XC6220B201ER	LVR-IC	LDO, 2.0V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4P	-	XC6220B211ER	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4R	-	XC6220B221ER	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4S	-	XC6220B231ER	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4T	-	XC6220B241ER	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4U	-	XC6220B251ER	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4V	-	XC6220B261ER	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4X	-	XC6220B271ER	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4Y	-	XC6220B281ER	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H4Z	-	XC6220B291ER	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5	-	PZU3.3BL	Z-diode	3.3V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
H5	-	R3118K311C	Vdet-IC	3.1V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
H5	-	RP109L331D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
H5	-	XC6221B36B7R	LVR-IC	LDO, 3.65V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
H5	-	XC6223F4019R-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL, ICP	USPQ-4B03	48vm	VR4	9a	Tor
H58	-	XC6220B08BER	LVR-IC	LDO, 0.85V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H59	-	XC6220B09BER	LVR-IC	LDO, 0.95V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5A	-	XC6220B10BER	LVR-IC	LDO, 1.05V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5B	-	XC6220B11BER	LVR-IC	LDO, 1.15V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5C	-	XC6220B12BER	LVR-IC	LDO, 1.25V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5D	-	XC6220B13BER	LVR-IC	LDO, 1.35V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5E	-	XC6220B14BER	LVR-IC	LDO, 1.45V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5F	-	XC6220B15BER	LVR-IC	LDO, 1.55V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5H	-	XC6220B16BER	LVR-IC	LDO, 1.65V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5K	-	XC6220B17BER	LVR-IC	LDO, 1.75V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5L	-	XC6220B18BER	LVR-IC	LDO, 1.85V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5M	-	XC6220B19BER	LVR-IC	LDO, 1.95V±20mV, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5N	-	XC6220B20BER	LVR-IC	LDO, 2.05V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5P	-	XC6220B21BER	LVR-IC	LDO, 2.15V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5R	-	XC6220B22BER	LVR-IC	LDO, 2.25V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5S	-	XC6220B23BER	LVR-IC	LDO, 2.35V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5T	-	XC6220B24BER	LVR-IC	LDO, 2.45V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5U	-	XC6220B25BER	LVR-IC	LDO, 2.55V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H5V	-	XC6220B26BER	LVR-IC	LDO, 2.65V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5X	-	XC6220B27BER	LVR-IC	LDO, 2.75V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5Y	-	XC6220B28BER	LVR-IC	LDO, 2.85V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H5Z	-	XC6220B29BER	LVR-IC	LDO, 2.95V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H6	-	LM4941TM	Lin-IC	AF PA, BTL, 2.4..5.5V, 1.25W(5V/8Ω), shutdown	BGA-9	39	-	9a	Nsc
H6	-	PZU3.6BL	Z-diode	3.6V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
H6	-	R3118K321C	Vdet-IC	3.2V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
H6	-	RP109L341D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
H6	-	XC6221B37B7R	LVR-IC	LDO, 3.75V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
H6	-	XC6223G4019R-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
H60	-	XC6220B301ER	LVR-IC	LDO, 3.0V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H61	-	XC6220B311ER	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H62	-	XC6220B321ER	LVR-IC	LDO, 3.2V±1%, 1, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H63	-	XC6220B331ER	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H64	-	XC6220B341ER	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H65	-	XC6220B351ER	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H66	-	XC6220B361ER	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H67	-	XC6220B371ER	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H68	-	XC6220B381ER	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H69	-	XC6220B391ER	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H6A	-	XC6220B401ER	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H6B	-	XC6220B411ER	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H6C	-	XC6220B421ER	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H6D	-	XC6220B431ER	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H6E	-	XC6220B441ER	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H6F	-	XC6220B451ER	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H6H	-	XC6220B461ER	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H6K	-	XC6220B471ER	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H6L	-	XC6220B481ER	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H6M	-	XC6220B491ER	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H6N	-	XC6220B501ER	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H7	-	PZU3.9BL	Z-diode	3.9V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
H7	-	R3118K331C	Vdet-IC	3.3V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
H7	-	RP109L351D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
H7	-	SN74AUP1G17DRY	CMOS-Log	Schmitt-trigger	QFN-6	52	Log11	9m	Ti
H7	-	SN74AUP1G17DSF	CMOS-Log	Schmitt-trigger	µQFN	80	Log11	9m	Ti
H7	-	SN74AUP1G17YFP	CMOS-Log	Schmitt-trigger	BGA-4	63	Log11	9v	Ti
H7	-	SN74AUP1G17YZP	CMOS-Log	Schmitt-trigger	BGA-5	46	Log11	9v	Ti
H7	-	XC6221B38B7R	LVR-IC	LDO, 3.85V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
H7	-	XC6223H4019R-G	LVR-IC	LDO, 4.0V±1%, 300mA, +CE, CL, PDR, ICP	USPQ-4B03	48vm	VR4	9a	Tor
H70	-	XC6220B30BER	LVR-IC	LDO, 3.05V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H71	-	XC6220B31BER	LVR-IC	LDO, 3.15V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H72	-	XC6220B32BER	LVR-IC	LDO, 3.25V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H73	-	XC6220B33BER	LVR-IC	LDO, 3.35V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H74	-	XC6220B34BER	LVR-IC	LDO, 3.45V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H75	-	XC6220B35BER	LVR-IC	LDO, 3.55V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H76	-	XC6220B36BER	LVR-IC	LDO, 3.65V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H77	-	XC6220B37BER	LVR-IC	LDO, 3.75V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H78	-	XC6220B38BER	LVR-IC	LDO, 3.85V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H79	-	XC6220B39BER	LVR-IC	LDO, 3.95V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H7A	-	XC6220B40BER	LVR-IC	LDO, 4.05V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H7B	-	XC6220B41BER	LVR-IC	LDO, 4.15V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H7C	-	XC6220B42BER	LVR-IC	LDO, 4.25V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H7D	-	XC6220B43BER	LVR-IC	LDO, 4.35V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H7E	-	XC6220B44BER	LVR-IC	LDO, 4.45V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H7F	-	XC6220B45BER	LVR-IC	LDO, 4.55V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H7H	-	XC6220B46BER	LVR-IC	LDO, 4.65V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H7K	-	XC6220B47BER	LVR-IC	LDO, 4.75V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H7L	-	XC6220B48BER	LVR-IC	LDO, 4.85V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H7M	-	XC6220B49BER	LVR-IC	LDO, 4.95V±1%, 1A, +CE, CL	USP-6C	49vr	VR4	9a	Tor
H8	-	LM4675TL	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.8W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Nsc
H8	-	PZU4.3BL	Z-diode	4.3V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
H8	-	R3118K341C	Vdet-IC	3.4V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
H8	-	RP109L361D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
H8	-	XC6221B39B7R	LVR-IC	LDO, 3.95V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
H88	-	XC6220C081ER	LVR-IC	LDO, 0.8V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H89	-	XC6220C091ER	LVR-IC	LDO, 0.9V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8A	-	XC6220C101ER	LVR-IC	LDO, 1.0V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8B	-	XC6220C111ER	LVR-IC	LDO, 1.1V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8C	-	XC6220C121ER	LVR-IC	LDO, 1.2V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H8D	-	XC6220C131ER	LVR-IC	LDO, 1.3V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8E	-	XC6220C141ER	LVR-IC	LDO, 1.4V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8F	-	XC6220C151ER	LVR-IC	LDO, 1.5V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8H	-	XC6220C161ER	LVR-IC	LDO, 1.6V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8K	-	XC6220C171ER	LVR-IC	LDO, 1.7V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8L	-	XC6220C181ER	LVR-IC	LDO, 1.8V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8M	-	XC6220C191ER	LVR-IC	LDO, 1.9V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8N	-	XC6220C201ER	LVR-IC	LDO, 2.0V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8P	-	XC6220C211ER	LVR-IC	LDO, 2.1V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8R	-	XC6220C221ER	LVR-IC	LDO, 2.2V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8S	-	XC6220C231ER	LVR-IC	LDO, 2.3V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8T	-	XC6220C241ER	LVR-IC	LDO, 2.4V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8U	-	XC6220C251ER	LVR-IC	LDO, 2.5V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8V	-	XC6220C261ER	LVR-IC	LDO, 2.6V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8X	-	XC6220C271ER	LVR-IC	LDO, 2.7V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8Y	-	XC6220C281ER	LVR-IC	LDO, 2.8V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H8Z	-	XC6220C291ER	LVR-IC	LDO, 2.9V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9	-	PZU4.7BL	Z-diode	4.7V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
H9	-	R3118K351C	Vdet-IC	3.5V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
H9	-	RP109L121D5	LVR-IC	LDO, 1.25V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
H9	-	RT9198-27GQW	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	WDFN-6	49xu	VR1	9a	Rct
H9	-	SN74AUP1G34DRY	CMOS-Log	Noninverting buffer	QFN-6	52	Log10	9m	Ti
H9	-	SN74AUP1G34DSF	CMOS-Log	Noninverting buffer	µQFN	80	Log10	9m	Ti
H9	-	SN74AUP1G34YFP	CMOS-Log	Noninverting buffer	BGA-4	63	Log10	9v	Ti
H9	-	SN74AUP1G34YZP	CMOS-Log	Noninverting buffer	BGA-5	46	Log10	9v	Ti
H9	-	XC6221B44B7R	LVR-IC	LDO, 4.45V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
H98	-	XC6220C08BER	LVR-IC	LDO, 0.85V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H99	-	XC6220C09BER	LVR-IC	LDO, 0.95V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9A	-	XC6220C10BER	LVR-IC	LDO, 1.05V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9B	-	XC6220C11BER	LVR-IC	LDO, 1.15V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9C	-	XC6220C12BER	LVR-IC	LDO, 1.25V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9D	-	XC6220C13BER	LVR-IC	LDO, 1.35V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9E	-	XC6220C14BER	LVR-IC	LDO, 1.45V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9F	-	XC6220C15BER	LVR-IC	LDO, 1.55V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9H	-	XC6220C16BER	LVR-IC	LDO, 1.65V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9K	-	XC6220C17BER	LVR-IC	LDO, 1.75V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9L	-	XC6220C18BER	LVR-IC	LDO, 1.85V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9M	-	XC6220C19BER	LVR-IC	LDO, 1.95V±20mV, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9N	-	XC6220C20BER	LVR-IC	LDO, 2.05V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9P	-	XC6220C21BER	LVR-IC	LDO, 2.15V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9R	-	XC6220C22BER	LVR-IC	LDO, 2.25V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9S	-	XC6220C23BER	LVR-IC	LDO, 2.35V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9T	-	XC6220C24BER	LVR-IC	LDO, 2.45V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9U	-	XC6220C25BER	LVR-IC	LDO, 2.55V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9V	-	XC6220C26BER	LVR-IC	LDO, 2.65V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9X	-	XC6220C27BER	LVR-IC	LDO, 2.75V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9Y	-	XC6220C28BER	LVR-IC	LDO, 2.85V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
H9Z	-	XC6220C29BER	LVR-IC	LDO, 2.95V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HA	-	GDZ6.8	Z-diode	6.47..7.14V, Izt=5.0mA, 100mW	GMD2	13d	-	2w	Rhm
HA	-	PZU5.1BL	Z-diode	5.1V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HA	-	R3116K071A	Vdet-IC	0.7V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HA	-	R3134K46EC3	Vdet-IC	4.63V±1.8%, -Reset PPO, -MR	DFN1212-6	52z6	VD5	9a	Ric
HA	-	RT9193-33GQW	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
HA	-	SN74AUP1G00DRY	CMOS-Log	2-input NAND gate	QFN-6	52	Log1	9m	Ti
HA	-	SN74AUP1G00DSF	CMOS-Log	2-input NAND gate	µQFN	80	Log1	9m	Ti
HA	-	SN74AUP1G00YFP	CMOS-Log	2-input NAND gate	BGA-6	40	Log1	9v	Ti
HA	-	SN74AUP1G00YZP	CMOS-Log	2-input NAND gate	BGA-5	46	Log1	9v	Ti
HA0	-	XC6220C301ER	LVR-IC	LDO, 3.0V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HA1	-	XC6220C311ER	LVR-IC	LDO, 3.1V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HA2	-	XC6220C321ER	LVR-IC	LDO, 3.2V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HA3	-	XC6220C331ER	LVR-IC	LDO, 3.3V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HA4	-	XC6220C341ER	LVR-IC	LDO, 3.4V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HA5	-	XC6220C351ER	LVR-IC	LDO, 3.5V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HA6	-	XC6220C361ER	LVR-IC	LDO, 3.6V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HA7	-	XC6220C371ER	LVR-IC	LDO, 3.7V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HA8	-	XC6220C381ER	LVR-IC	LDO, 3.8V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HA9	-	XC6220C391ER	LVR-IC	LDO, 3.9V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HAA	-	XC6127N15A7R	Vdet-IC	1.5V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HAA	-	XC6220C401ER	LVR-IC	LDO, 4.0V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HAB	-	XC6127N15B7R	Vdet-IC	1.5V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HAB	-	XC6220C411ER	LVR-IC	LDO, 4.1V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HAC	-	XC6127N15C7R	Vdet-IC	1.5V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HAC	-	XC6220C421ER	LVR-IC	LDO, 4.2V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HAD	-	XC6127N15D7R	Vdet-IC	1.5V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HAD	-	XC6220C431ER	LVR-IC	LDO, 4.3V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HAE	-	XC6127N15E7R	Vdet-IC	1.5V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HAE	-	XC6220C441ER	LVR-IC	LDO, 4.4V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HAF	-	XC6127N15F7R	Vdet-IC	1.5V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HAF	-	XC6220C451ER	LVR-IC	LDO, 4.5V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HAH	-	XC6127N15G7R	Vdet-IC	1.5V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HAH	-	XC6220C461ER	LVR-IC	LDO, 4.6V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HAK	-	XC6127N15H7R	Vdet-IC	1.5V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HAK	-	XC6220C471ER	LVR-IC	LDO, 4.7V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HAL	-	XC6127N15J7R	Vdet-IC	1.5V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HAL	-	XC6220C481ER	LVR-IC	LDO, 4.8V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HAM	-	XC6127N15K7R	Vdet-IC	1.5V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HAM	-	XC6220C491ER	LVR-IC	LDO, 4.9V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HAN	-	XC6127N16A7R	Vdet-IC	1.6V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HAN	-	XC6220C501ER	LVR-IC	LDO, 5.0V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HAP	-	XC6127N16B7R	Vdet-IC	1.6V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HAR	-	XC6127N16C7R	Vdet-IC	1.6V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HAS	-	XC6127N16D7R	Vdet-IC	1.6V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HAT	-	XC6127N16E7R	Vdet-IC	1.6V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HAU	-	XC6127N16F7R	Vdet-IC	1.6V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HAV	-	XC6127N16G7R	Vdet-IC	1.6V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HAX	-	XC6127N16H7R	Vdet-IC	1.6V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HAY	-	XC6127N16J7R	Vdet-IC	1.6V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HAZ	-	XC6127N16K7R	Vdet-IC	1.6V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HB	-	PZU5.6BL	Z-diode	5.6V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HB	-	R3116K081A	Vdet-IC	0.8V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HB	-	SN74AUP1G02DRY	CMOS-Log	2-input NOR gate	QFN-6	52	Log2	9m	Ti
HB	-	SN74AUP1G02DSF	CMOS-Log	2-input NOR gate	µQFN	80	Log2	9m	Ti
HB	-	SN74AUP1G02YFP	CMOS-Log	2-input NOR gate	BGA-6	40	Log2	9v	Ti
HB0	-	XC6220C30BER	LVR-IC	LDO, 3.05V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HB1	-	XC6220C31BER	LVR-IC	LDO, 3.15V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HB2	-	XC6220C32BER	LVR-IC	LDO, 3.25V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HB3	-	XC6220C33BER	LVR-IC	LDO, 3.35V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HB4	-	XC6220C34BER	LVR-IC	LDO, 3.45V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HB5	-	XC6220C35BER	LVR-IC	LDO, 3.55V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HB6	-	XC6220C36BER	LVR-IC	LDO, 3.65V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HB7	-	XC6220C37BER	LVR-IC	LDO, 3.75V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HB8	-	XC6220C38BER	LVR-IC	LDO, 3.85V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HB9	-	XC6220C39BER	LVR-IC	LDO, 3.95V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HBA	-	XC6127N17A7R	Vdet-IC	1.7V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HBA	-	XC6220C40BER	LVR-IC	LDO, 4.05V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HBB	-	XC6127N17B7R	Vdet-IC	1.7V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HBB	-	XC6220C41BER	LVR-IC	LDO, 4.15V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HBC	-	XC6127N17C7R	Vdet-IC	1.7V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HBC	-	XC6220C42BER	LVR-IC	LDO, 4.25V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HBD	-	XC6127N17D7R	Vdet-IC	1.7V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HBD	-	XC6220C43BER	LVR-IC	LDO, 4.35V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HBE	-	XC6127N17E7R	Vdet-IC	1.7V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HBE	-	XC6220C44BER	LVR-IC	LDO, 4.45V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HBF	-	XC6127N17F7R	Vdet-IC	1.7V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HBF	-	XC6220C45BER	LVR-IC	LDO, 4.55V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HBH	-	XC6127N17G7R	Vdet-IC	1.7V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HBH	-	XC6220C46BER	LVR-IC	LDO, 4.65V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HBK	-	XC6127N17H7R	Vdet-IC	1.7V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HBK	-	XC6220C47BER	LVR-IC	LDO, 4.75V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HBL	-	XC6127N17J7R	Vdet-IC	1.7V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HBL	-	XC6220C48BER	LVR-IC	LDO, 4.85V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HBM	-	XC6127N17K7R	Vdet-IC	1.7V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HBM	-	XC6220C49BER	LVR-IC	LDO, 4.95V±1%, 1A, +CE, PDR	USP-6C	49vr	VR4	9a	Tor
HBN	-	XC6127N18A7R	Vdet-IC	1.8V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HBP	-	XC6127N18B7R	Vdet-IC	1.8V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HBR	-	XC6127N18C7R	Vdet-IC	1.8V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HBS	-	XC6127N18D7R	Vdet-IC	1.8V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HBT	-	XC6127N18E7R	Vdet-IC	1.8V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HBU	-	XC6127N18F7R	Vdet-IC	1.8V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HBV	-	XC6127N18G7R	Vdet-IC	1.8V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HBX	-	XC6127N18H7R	Vdet-IC	1.8V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HBY	-	XC6127N18J7R	Vdet-IC	1.8V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HBZ	-	XC6127N18K7R	Vdet-IC	1.8V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HC	-	PZU6.2BL	Z-diode	6.2V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HC	-	R3116K091A	Vdet-IC	0.9V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HC	-	SN74AUP1G04DRY	CMOS-Log	Inverter	QFN-6	52	Log6	9m	Ti
HC	-	SN74AUP1G04DSF	CMOS-Log	Inverter	µQFN	80	Log6	9m	Ti
HC	-	SN74AUP1G04YFP	CMOS-Log	Inverter	BGA-4	63	Log6	9v	Ti
HC8	-	XC6220D081ER	LVR-IC	LDO, 0.8V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HC9	-	XC6220D091ER	LVR-IC	LDO, 0.9V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCA	-	XC6127N19A7R	Vdet-IC	1.9V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HCA	-	XC6220D101ER	LVR-IC	LDO, 1.0V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCB	-	XC6127N19B7R	Vdet-IC	1.9V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HCB	-	XC6220D111ER	LVR-IC	LDO, 1.1V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCC	-	XC6127N19C7R	Vdet-IC	1.9V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HCC	-	XC6220D121ER	LVR-IC	LDO, 1.2V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCD	-	XC6127N19D7R	Vdet-IC	1.9V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HCD	-	XC6220D131ER	LVR-IC	LDO, 1.3V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCE	-	XC6127N19E7R	Vdet-IC	1.9V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HCE	-	XC6220D141ER	LVR-IC	LDO, 1.4V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCF	-	XC6127N19F7R	Vdet-IC	1.9V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HCF	-	XC6220D151ER	LVR-IC	LDO, 1.5V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCH	-	XC6127N19G7R	Vdet-IC	1.9V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HCH	-	XC6220D161ER	LVR-IC	LDO, 1.6V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCK	-	XC6127N19H7R	Vdet-IC	1.9V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HCK	-	XC6220D171ER	LVR-IC	LDO, 1.7V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCL	-	XC6127N19J7R	Vdet-IC	1.9V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HCL	-	XC6220D181ER	LVR-IC	LDO, 1.8V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCM	-	XC6127N19K7R	Vdet-IC	1.9V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HCM	-	XC6220D191ER	LVR-IC	LDO, 1.9V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCN	-	XC6127N20A7R	Vdet-IC	2.0V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HCN	-	XC6220D201ER	LVR-IC	LDO, 2.0V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCP	-	XC6127N20B7R	Vdet-IC	2.0V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HCP	-	XC6220D211ER	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCR	-	XC6127N20C7R	Vdet-IC	2.0V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HCR	-	XC6220D221ER	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCS	-	XC6127N20D7R	Vdet-IC	2.0V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HCS	-	XC6220D231ER	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCT	-	XC6127N20E7R	Vdet-IC	2.0V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HCT	-	XC6220D241ER	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCU	-	XC6127N20F7R	Vdet-IC	2.0V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HCU	-	XC6220D251ER	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCV	-	XC6127N20G7R	Vdet-IC	2.0V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HCV	-	XC6220D261ER	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCX	-	XC6127N20H7R	Vdet-IC	2.0V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HCX	-	XC6220D271ER	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCY	-	XC6127N20J7R	Vdet-IC	2.0V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HCY	-	XC6220D281ER	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HCZ	-	XC6127N20K7R	Vdet-IC	2.0V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HCZ	-	XC6220D291ER	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HD	-	PZU6.8BL	Z-diode	6.8V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HD	-	R3116K101A	Vdet-IC	1.0V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HD	-	RT9193-1HGQW	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
HD8	-	XC6220D08BER	LVR-IC	LDO, 0.85V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HD9	-	XC6220D09BER	LVR-IC	LDO, 0.95V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDA	-	XC6127N21A7R	Vdet-IC	2.1V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HDA	-	XC6220D10BER	LVR-IC	LDO, 1.05V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDB	-	XC6127N21B7R	Vdet-IC	2.1V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HDB	-	XC6220D11BER	LVR-IC	LDO, 1.15V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDC	-	XC6127N21C7R	Vdet-IC	2.1V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HDC	-	XC6220D12BER	LVR-IC	LDO, 1.25V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDD	-	XC6127N21D7R	Vdet-IC	2.1V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HDD	-	XC6220D13BER	LVR-IC	LDO, 1.35V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDE	-	XC6127N21E7R	Vdet-IC	2.1V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HDE	-	XC6220D14BER	LVR-IC	LDO, 1.45V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDF	-	XC6127N21F7R	Vdet-IC	2.1V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HDF	-	XC6220D15BER	LVR-IC	LDO, 1.55V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDH	-	XC6127N21G7R	Vdet-IC	2.1V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HDH	-	XC6220D16BER	LVR-IC	LDO, 1.65V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDK	-	XC6127N21H7R	Vdet-IC	2.1V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HDK	-	XC6220D17BER	LVR-IC	LDO, 1.75V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDL	-	XC6127N21J7R	Vdet-IC	2.1V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HDL	-	XC6220D18BER	LVR-IC	LDO, 1.85V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDM	-	XC6127N21K7R	Vdet-IC	2.1V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HDM	-	XC6220D19BER	LVR-IC	LDO, 1.95V±20mV, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDN	-	XC6127N22A7R	Vdet-IC	2.2V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HDN	-	XC6220D20BER	LVR-IC	LDO, 2.05V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDP	-	XC6127N22B7R	Vdet-IC	2.2V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HDP	-	XC6220D21BER	LVR-IC	LDO, 2.15V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDR	-	XC6127N22C7R	Vdet-IC	2.2V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HDR	-	XC6220D22BER	LVR-IC	LDO, 2.25V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDS	-	XC6127N22D7R	Vdet-IC	2.2V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HDS	-	XC6220D23BER	LVR-IC	LDO, 2.35V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDT	-	XC6127N22E7R	Vdet-IC	2.2V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HDT	-	XC6220D24BER	LVR-IC	LDO, 2.45V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDU	-	XC6127N22F7R	Vdet-IC	2.2V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HDU	-	XC6220D25BER	LVR-IC	LDO, 2.55V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDV	-	XC6127N22G7R	Vdet-IC	2.2V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HDV	-	XC6220D26BER	LVR-IC	LDO, 2.65V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDX	-	XC6127N22H7R	Vdet-IC	2.2V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HDX	-	XC6220D27BER	LVR-IC	LDO, 2.75V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDY	-	XC6127N22J7R	Vdet-IC	2.2V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HDY	-	XC6220D28BER	LVR-IC	LDO, 2.85V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HDZ	-	XC6127N22K7R	Vdet-IC	2.2V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HDZ	-	XC6220D29BER	LVR-IC	LDO, 2.95V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HE	-	PZU7.5BL	Z-diode	7.5V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HE	-	R3116K111A	Vdet-IC	1.1V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HE	-	SN74AUP1G08DRY	CMOS-Log	2-input AND gate	QFN-6	52	Log3	9m	Ti
HE	-	SN74AUP1G08DSF	CMOS-Log	2-input AND gate	µQFN	80	Log3	9m	Ti
HE	-	SN74AUP1G08YFP	CMOS-Log	2-input AND gate	BGA-6	40	Log3	9v	Ti
HE	-	SN74AUP1G08YZP	CMOS-Log	2-input AND gate	BGA-5	46	Log3	9v	Ti
HE	-	SN74AUP2G08RSE	CMOS-Log	Dual 2-input AND gates	QFN-8	51	Log51	9a	Ti
HE	-	SN74AUP2G08YFP	CMOS-Log	Dual 2-input AND gates	MBGA-8	50	Log51	9v	Ti
HE	-	SN74AUP2G08YZP	CMOS-Log	Dual 2-input AND gates	BGA-8	50	Log51	9v	Ti
HE0	-	XC6220D301ER	LVR-IC	LDO, 3.0V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HE1	-	XC6220D311ER	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HE2	-	XC6220D321ER	LVR-IC	LDO, 3.2V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HE3	-	XC6220D331ER	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HE4	-	XC6220D341ER	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HE5	-	XC6220D351ER	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HE6	-	XC6220D361ER	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HE7	-	XC6220D371ER	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HE8	-	XC6220D381ER	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HE9	-	XC6220D391ER	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HEA	-	XC6127N23A7R	Vdet-IC	2.3V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HEA	-	XC6220D401ER	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HEB	-	XC6127N23B7R	Vdet-IC	2.3V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HEB	-	XC6220D411ER	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HEC	-	XC6127N23C7R	Vdet-IC	2.3V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HEC	-	XC6220D421ER	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HED	-	XC6127N23D7R	Vdet-IC	2.3V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HED	-	XC6220D431ER	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HEE	-	XC6127N23E7R	Vdet-IC	2.3V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HEE	-	XC6220D441ER	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HEF	-	XC6127N23F7R	Vdet-IC	2.3V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HEF	-	XC6220D451ER	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HEH	-	XC6127N23G7R	Vdet-IC	2.3V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HEH	-	XC6220D461ER	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HEK	-	XC6127N23H7R	Vdet-IC	2.3V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HEK	-	XC6220D471ER	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HEL	-	XC6127N23J7R	Vdet-IC	2.3V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HEL	-	XC6220D481ER	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HEM	-	XC6127N23K7R	Vdet-IC	2.3V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HEM	-	XC6220D491ER	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HEN	-	XC6127N24A7R	Vdet-IC	2.4V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HEN	-	XC6220D501ER	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HEP	-	XC6127N24B7R	Vdet-IC	2.4V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HER	-	XC6127N24C7R	Vdet-IC	2.4V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HES	-	XC6127N24D7R	Vdet-IC	2.4V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HET	-	XC6127N24E7R	Vdet-IC	2.4V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HEU	-	XC6127N24F7R	Vdet-IC	2.4V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HEV	-	XC6127N24G7R	Vdet-IC	2.4V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HEX	-	XC6127N24H7R	Vdet-IC	2.4V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HEY	-	XC6127N24J7R	Vdet-IC	2.4V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HEZ	-	XC6127N24K7R	Vdet-IC	2.4V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HF	-	PZU8.2BL	Z-diode	8.2V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HF	-	R3116K121A	Vdet-IC	1.2V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HF	-	SN74AUP1G14DRY	CMOS-Log	Inverting Schmitt-trigger	QFN-6	52	Log7	9m	Ti
HF	-	SN74AUP1G14DSF	CMOS-Log	Inverting Schmitt-trigger	µQFN	80	Log7	9m	Ti
HF	-	SN74AUP1G14YFP	CMOS-Log	Inverting Schmitt-trigger	BGA-4	63	Log7	9v	Ti
HF	-	SN74AUP1G14YZP	CMOS-Log	Inverting Schmitt-trigger	BGA-5	46	Log7	9v	Ti
HF0	-	XC6220D30BER	LVR-IC	LDO, 3.05V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HF1	-	XC6220D31BER	LVR-IC	LDO, 3.15V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HF2	-	XC6220D32BER	LVR-IC	LDO, 3.25V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HF3	-	XC6220D33BER	LVR-IC	LDO, 3.35V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HF4	-	XC6220D34BER	LVR-IC	LDO, 3.45V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HF5	-	XC6220D35BER	LVR-IC	LDO, 3.55V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HF6	-	XC6220D36BER	LVR-IC	LDO, 3.65V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HF7	-	XC6220D37BER	LVR-IC	LDO, 3.75V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HF8	-	XC6220D38BER	LVR-IC	LDO, 3.85V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HF8	-	XCL202B081BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.8V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HF9	-	XC6220D39BER	LVR-IC	LDO, 3.95V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HF9	-	XCL202B091BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.9V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HFA	-	XC6127N25A7R	Vdet-IC	2.5V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HFA	-	XC6220D40BER	LVR-IC	LDO, 4.05V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HFB	-	XC6127N25B7R	Vdet-IC	2.5V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HFB	-	XC6220D41BER	LVR-IC	LDO, 4.15V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HFC	-	XC6127N25C7R	Vdet-IC	2.5V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HFC	-	XC6220D42BER	LVR-IC	LDO, 4.25V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HFD	-	XC6127N25D7R	Vdet-IC	2.5V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HFD	-	XC6220D43BER	LVR-IC	LDO, 4.35V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HFE	-	XC6127N25E7R	Vdet-IC	2.5V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HFE	-	XC6220D44BER	LVR-IC	LDO, 4.45V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HFF	-	XC6127N25F7R	Vdet-IC	2.5V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HFF	-	XC6220D45BER	LVR-IC	LDO, 4.55V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HFH	-	XC6127N25G7R	Vdet-IC	2.5V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HFH	-	XC6220D46BER	LVR-IC	LDO, 4.65V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HFK	-	XC6127N25H7R	Vdet-IC	2.5V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HFK	-	XC6220D47BER	LVR-IC	LDO, 4.75V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HFL	-	XC6127N25J7R	Vdet-IC	2.5V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HFL	-	XC6220D48BER	LVR-IC	LDO, 4.85V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HFL	-	XCL202B0L1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.85V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HFM	-	XC6127N25K7R	Vdet-IC	2.5V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HFM	-	XC6220D49BER	LVR-IC	LDO, 4.95V±1%, 1A, +CE, CL, PDR	USP-6C	49vr	VR4	9a	Tor
HFM	-	XCL202B0M1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.95V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HFN	-	XC6127N26A7R	Vdet-IC	2.6V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HFP	-	XC6127N26B7R	Vdet-IC	2.6V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HFR	-	XC6127N26C7R	Vdet-IC	2.6V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HFS	-	XC6127N26D7R	Vdet-IC	2.6V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HFT	-	XC6127N26E7R	Vdet-IC	2.6V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HFU	-	XC6127N26F7R	Vdet-IC	2.6V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HFV	-	XC6127N26G7R	Vdet-IC	2.6V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HFX	-	XC6127N26H7R	Vdet-IC	2.6V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HFY	-	XC6127N26J7R	Vdet-IC	2.6V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HFZ	-	XC6127N26K7R	Vdet-IC	2.6V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HG	-	PZU9.1BL	Z-diode	9.1V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HG	-	R3116K131A	Vdet-IC	1.3V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HG	-	SN74AUP1G32DRY	CMOS-Log	2-input OR gate	QFN-6	52	Log4	9m	Ti
HG	-	SN74AUP1G32DSF	CMOS-Log	2-input OR gate	µQFN	80	Log4	9m	Ti
HG	-	SN74AUP1G32YFP	CMOS-Log	2-input OR gate	BGA-6	40	Log4	9v	Ti
HG	-	SN74AUP1G32YZP	CMOS-Log	2-input OR gate	BGA-5	46	Log4	9v	Ti
HH	-	PZU10BL	Z-diode	10V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HH	-	R3116K141A	Vdet-IC	1.4V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HH	-	SN74AUP1G57DRY	CMOS-Log	Configurable multiple-function gate	QFN-6	52	Log36	9m	Ti
HH	-	SN74AUP1G57DSF	CMOS-Log	Configurable multiple-function gate	µQFN	80	Log36	9m	Ti
HH	-	SN74AUP1G57YFP	CMOS-Log	Configurable multiple-function gate	µBGA-6	40	Log36	9v	Ti
HH	-	SN74AUP1G57YZP	CMOS-Log	Configurable multiple-function gate	BGA-6	40	Log36	9v	Ti
HH0	-	XCL202B101BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.0V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HH1	-	XCL202B111BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.1V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HH2	-	XCL202B121BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.2V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HH3	-	XCL202B131BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.3V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HH4	-	XCL202B141BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.4V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HH5	-	XCL202B151BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.5V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HH6	-	XCL202B161BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.6V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HH7	-	XCL202B171BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.7V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HH8	-	XCL202B181BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.8V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HH9	-	XCL202B191BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.9V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HHA	-	XC6127N27A7R	Vdet-IC	2.7V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HHA	-	XCL202B1A1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.05V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HHB	-	XC6127N27B7R	Vdet-IC	2.7V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HHB	-	XCL202B1B1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.15V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HHC	-	XC6127N27C7R	Vdet-IC	2.7V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HHC	-	XCL202B1C1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.25V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HHD	-	XC6127N27D7R	Vdet-IC	2.7V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HHD	-	XCL202B1D1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.35V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HHE	-	XC6127N27E7R	Vdet-IC	2.7V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HHE	-	XCL202B1E1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.45V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HHF	-	XC6127N27F7R	Vdet-IC	2.7V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HHF	-	XCL202B1F1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.55V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HHH	-	XC6127N27G7R	Vdet-IC	2.7V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HHH	-	XCL202B1H1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.65V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HHK	-	XC6127N27H7R	Vdet-IC	2.7V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HHK	-	XCL202B1K1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.75V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HHL	-	XC6127N27J7R	Vdet-IC	2.7V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HHL	-	XCL202B1L1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.85V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HHM	-	XC6127N27K7R	Vdet-IC	2.7V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HHM	-	XCL202B1M1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.95V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HHN	-	XC6127N28A7R	Vdet-IC	2.8V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HHP	-	XC6127N28B7R	Vdet-IC	2.8V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HHR	-	XC6127N28C7R	Vdet-IC	2.8V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HHS	-	XC6127N28D7R	Vdet-IC	2.8V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HHT	-	XC6127N28E7R	Vdet-IC	2.8V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HHU	-	XC6127N28F7R	Vdet-IC	2.8V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HHV	-	XC6127N28G7R	Vdet-IC	2.8V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HHX	-	XC6127N28H7R	Vdet-IC	2.8V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HHY	-	XC6127N28J7R	Vdet-IC	2.8V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HHZ	-	XC6127N28K7R	Vdet-IC	2.8V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HJ	-	R3116K151A	Vdet-IC	1.5V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HJ	-	SN74AUP1G58DRY	CMOS-Log	Configurable multiple-function gate	QFN-6	52	Log37	9m	Ti
HJ	-	SN74AUP1G58DSF	CMOS-Log	Configurable multiple-function gate	µQFN	80	Log37	9m	Ti
HJ	-	SN74AUP1G58YFP	CMOS-Log	Configurable multiple-function gate	µBGA-6	40	Log37	9v	Ti
HJ	-	SN74AUP1G58YZP	CMOS-Log	Configurable multiple-function gate	BGA-6	40	Log37	9v	Ti
HK	-	PZU11BL	Z-diode	11V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HK	-	R3116K161A	Vdet-IC	1.6V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HK	-	SN74AUP1G240DRY	CMOS-Log	Bus buffer inverted with 3–state output	QFN-6	52	Log22	9m	Ti
HK	-	SN74AUP1G240DSF	CMOS-Log	Bus buffer inverted with 3–state output	µQFN	80	Log22	9m	Ti
HK	-	SN74AUP1G240YFP	CMOS-Log	Bus buffer inverted with 3–state output	BGA-6	40	Log22	9v	Ti
HK	-	SN74AUP1G240YZP	CMOS-Log	Bus buffer inverted with 3–state output	BGA-5	46	Log22	9v	Ti
HK0	-	XCL202B201BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.0V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HK1	-	XCL202B211BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.1V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HK2	-	XCL202B221BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.2V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HK3	-	XCL202B231BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.3V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HK4	-	XCL202B241BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.4V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HK5	-	XCL202B251BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.5V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HK6	-	XCL202B261BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.6V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HK7	-	XCL202B271BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.7V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HK8	-	XCL202B281BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.8V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HK9	-	XCL202B291BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.9V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HKA	-	XC6127N29A7R	Vdet-IC	2.9V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HKA	-	XCL202B2A1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.05V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HKB	-	XC6127N29B7R	Vdet-IC	2.9V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HKB	-	XCL202B2B1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.15V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HKC	-	XC6127N29C7R	Vdet-IC	2.9V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HKC	-	XCL202B2C1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.25V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HKD	-	XC6127N29D7R	Vdet-IC	2.9V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HKD	-	XCL202B2D1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.35V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HKE	-	XC6127N29E7R	Vdet-IC	2.9V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HKE	-	XCL202B2E1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.45V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HKF	-	XC6127N29F7R	Vdet-IC	2.9V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HKF	-	XCL202B2F1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.55V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HKH	-	XC6127N29G7R	Vdet-IC	2.9V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HKH	-	XCL202B2H1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.65V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HKK	-	XC6127N29H7R	Vdet-IC	2.9V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HKK	-	XCL202B2K1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.75V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HKL	-	XC6127N29J7R	Vdet-IC	2.9V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HKL	-	XCL202B2L1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.85V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HKM	-	XC6127N29K7R	Vdet-IC	2.9V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HKM	-	XCL202B2M1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.95V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HKN	-	XC6127N30A7R	Vdet-IC	3.0V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HKP	-	XC6127N30B7R	Vdet-IC	3.0V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HKR	-	XC6127N30C7R	Vdet-IC	3.0V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HKS	-	XC6127N30D7R	Vdet-IC	3.0V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HKT	-	XC6127N30E7R	Vdet-IC	3.0V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HKU	-	XC6127N30F7R	Vdet-IC	3.0V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HKV	-	XC6127N30G7R	Vdet-IC	3.0V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HKX	-	XC6127N30H7R	Vdet-IC	3.0V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HKY	-	XC6127N30J7R	Vdet-IC	3.0V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HKZ	-	XC6127N30K7R	Vdet-IC	3.0V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
hl	-	BU23UA3WNVX	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
HL	-	PZU12BL	Z-diode	12V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HL	-	R3116K171A	Vdet-IC	1.7V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HL0	-	XCL202B301BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HL1	-	XCL202B311BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HL2	-	XCL202B321BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HL3	-	XCL202B331BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HL4	-	XCL202B341BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HL5	-	XCL202B351BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HL6	-	XCL202B361BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HL7	-	XCL202B371BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HL8	-	XCL202B381BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HL9	-	XCL202B391BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HLA	-	XC6127N31A7R	Vdet-IC	3.1V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HLA	-	XCL202B3A1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HLB	-	XC6127N31B7R	Vdet-IC	3.1V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HLB	-	XCL202B3B1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HLC	-	XC6127N31C7R	Vdet-IC	3.1V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HLC	-	XCL202B3C1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HLD	-	XC6127N31D7R	Vdet-IC	3.1V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HLD	-	XCL202B3D1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HLE	-	XC6127N31E7R	Vdet-IC	3.1V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HLE	-	XCL202B3E1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HLF	-	XC6127N31F7R	Vdet-IC	3.1V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HLF	-	XCL202B3F1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HLH	-	XC6127N31G7R	Vdet-IC	3.1V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HLH	-	XCL202B3H1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HLK	-	XC6127N31H7R	Vdet-IC	3.1V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HLK	-	XCL202B3K1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HLL	-	XC6127N31J7R	Vdet-IC	3.1V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HLL	-	XCL202B3L1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HLM	-	XC6127N31K7R	Vdet-IC	3.1V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HLM	-	XCL202B3M1BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HLN	-	XC6127N32A7R	Vdet-IC	3.2V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HLP	-	XC6127N32B7R	Vdet-IC	3.2V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HLR	-	XC6127N32C7R	Vdet-IC	3.2V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HLS	-	XC6127N32D7R	Vdet-IC	3.2V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HLT	-	XC6127N32E7R	Vdet-IC	3.2V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HLU	-	XC6127N32F7R	Vdet-IC	3.2V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HLV	-	XC6127N32G7R	Vdet-IC	3.2V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HLX	-	XC6127N32H7R	Vdet-IC	3.2V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HLY	-	XC6127N32J7R	Vdet-IC	3.2V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HLZ	-	XC6127N32K7R	Vdet-IC	3.2V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HM	-	PZU13BL	Z-diode	13V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HM	-	R3116K181A	Vdet-IC	1.8V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HM	-	SN74AUP1G125DRY	CMOS-Log	Bus buffer gate with 3-state output	QFN-6	52	Log14	9m	Ti
HM	-	SN74AUP1G125DSF	CMOS-Log	Bus buffer gate with 3-state output	µQFN	80	Log14	9m	Ti
HM	-	SN74AUP1G125YFP	CMOS-Log	Bus buffer gate with 3-state output	BGA-6	40	Log14	9v	Ti
HM	-	SN74AUP1G125YZP	CMOS-Log	Bus buffer gate with 3-state output	BGA-5	46	Log14	9v	Ti
HM	-	SN74AUP2G125RSE	CMOS-Log	Dual bus buffer with 3-state output	QFN-8	51	Log54	9v	Ti
HM	-	SN74AUP2G125YFP	CMOS-Log	Dual bus buffer with 3-state output	MBGA-8	50	Log54	9v	Ti
HM	-	SN74AUP2G125YZP	CMOS-Log	Dual bus buffer with 3-state output	BGA-8	50	Log54	9v	Ti

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HM0	-	XCL202B401BR-G	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±2%, 400mA, +CE, CL	CL-2025	67dc7	DC23	9a	Tor
HMA	-	XC6127N33A7R	Vdet-IC	3.3V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HMB	-	XC6127N33B7R	Vdet-IC	3.3V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HMC	-	XC6127N33C7R	Vdet-IC	3.3V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HMD	-	XC6127N33D7R	Vdet-IC	3.3V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HME	-	XC6127N33E7R	Vdet-IC	3.3V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HMF	-	XC6127N33F7R	Vdet-IC	3.3V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HMH	-	XC6127N33G7R	Vdet-IC	3.3V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HMK	-	XC6127N33H7R	Vdet-IC	3.3V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HML	-	XC6127N33J7R	Vdet-IC	3.3V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HMM	-	XC6127N33K7R	Vdet-IC	3.3V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HMN	-	XC6127N34A7R	Vdet-IC	3.4V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HMP	-	XC6127N34B7R	Vdet-IC	3.4V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HMR	-	XC6127N34C7R	Vdet-IC	3.4V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HMS	-	XC6127N34D7R	Vdet-IC	3.4V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HMT	-	XC6127N34E7R	Vdet-IC	3.4V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HMU	-	XC6127N34F7R	Vdet-IC	3.4V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HMV	-	XC6127N34G7R	Vdet-IC	3.4V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HMX	-	XC6127N34H7R	Vdet-IC	3.4V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HMY	-	XC6127N34J7R	Vdet-IC	3.4V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HMZ	-	XC6127N34K7R	Vdet-IC	3.4V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HN	-	PZU15BL	Z-diode	15V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HN	-	R3116K191A	Vdet-IC	1.9V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HN	-	SN74AUP1G126DRY	CMOS-Log	Bus buffer gate with 3-state output	QFN-6	52	Log13	9m	Ti
HN	-	SN74AUP1G126DSF	CMOS-Log	Bus buffer gate with 3-state output	µQFN	80	Log13	9m	Ti
HN	-	SN74AUP1G126YFP	CMOS-Log	Bus buffer gate with 3-state output	BGA-6	40	Log13	9v	Ti
HN	-	SN74AUP1G126YZP	CMOS-Log	Bus buffer gate with 3-state output	BGA-5	46	Log13	9v	Ti
HN	-	SN74AUP2G126RSE	CMOS-Log	Bus buffer gate with 3-state output	QFN-8	51	Log13	9d	Ti
HN	-	SN74AUP2G126YFP	CMOS-Log	Bus buffer gate with 3-state output	MBGA-8	50	Log13	9v	Ti
HN	-	SN74AUP2G126YZP	CMOS-Log	Bus buffer gate with 3-state output	BGA-8	50	Log13	9v	Ti
HNA	-	XC6127N35A7R	Vdet-IC	3.5V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HNB	-	XC6127N35B7R	Vdet-IC	3.5V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HNC	-	XC6127N35C7R	Vdet-IC	3.5V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HND	-	XC6127N35D7R	Vdet-IC	3.5V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HNE	-	XC6127N35E7R	Vdet-IC	3.5V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HNF	-	XC6127N35F7R	Vdet-IC	3.5V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HNH	-	XC6127N35G7R	Vdet-IC	3.5V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HNK	-	XC6127N35H7R	Vdet-IC	3.5V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HNL	-	XC6127N35J7R	Vdet-IC	3.5V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HNM	-	XC6127N35K7R	Vdet-IC	3.5V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HNN	-	XC6127N36A7R	Vdet-IC	3.6V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HNP	-	XC6127N36B7R	Vdet-IC	3.6V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HNR	-	XC6127N36C7R	Vdet-IC	3.6V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HNS	-	XC6127N36D7R	Vdet-IC	3.6V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HNT	-	XC6127N36E7R	Vdet-IC	3.6V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HNU	-	XC6127N36F7R	Vdet-IC	3.6V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HNV	-	XC6127N36G7R	Vdet-IC	3.6V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HNX	-	XC6127N36H7R	Vdet-IC	3.6V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HNY	-	XC6127N36J7R	Vdet-IC	3.6V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HNZ	-	XC6127N36K7R	Vdet-IC	3.6V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HP	-	MIC2211-2.0/3.0BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.0V(150mA)/3.0V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
HP	-	PZU16BL	Z-diode	16V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HP	-	R3116K201A	Vdet-IC	2.0V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HP	-	SN74AUP1G97DRY	CMOS-Log	Configurable multiple-function gate	QFN-6	52	Log41	9m	Ti
HP	-	SN74AUP1G97DSF	CMOS-Log	Configurable multiple-function gate	µQFN	80	Log41	9m	Ti
HP	-	SN74AUP1G97YFP	CMOS-Log	Configurable multiple-function gate	µBGA-6	40	Log41	9v	Ti
HP	-	SN74AUP1G97YZP	CMOS-Log	Configurable multiple-function gate	BGA-6	40	Log41	9v	Ti
HPA	-	XC6127N37A7R	Vdet-IC	3.7V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HPB	-	XC6127N37B7R	Vdet-IC	3.7V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HPC	-	XC6127N37C7R	Vdet-IC	3.7V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HPD	-	XC6127N37D7R	Vdet-IC	3.7V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HPE	-	XC6127N37E7R	Vdet-IC	3.7V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HPF	-	XC6127N37F7R	Vdet-IC	3.7V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HPH	-	XC6127N37G7R	Vdet-IC	3.7V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HPK	-	XC6127N37H7R	Vdet-IC	3.7V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HPL	-	XC6127N37J7R	Vdet-IC	3.7V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HPM	-	XC6127N37K7R	Vdet-IC	3.7V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HPN	-	XC6127N38A7R	Vdet-IC	3.8V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HPP	-	XC6127N38B7R	Vdet-IC	3.8V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HPR	-	XC6127N38C7R	Vdet-IC	3.8V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HPS	-	XC6127N38D7R	Vdet-IC	3.8V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HPT	-	XC6127N38E7R	Vdet-IC	3.8V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HPU	-	XC6127N38F7R	Vdet-IC	3.8V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HPV	-	XC6127N38G7R	Vdet-IC	3.8V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HPX	-	XC6127N38H7R	Vdet-IC	3.8V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HPY	-	XC6127N38J7R	Vdet-IC	3.8V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HPZ	-	XC6127N38K7R	Vdet-IC	3.8V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HQ	-	R3116K211A	Vdet-IC	2.1V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HR	-	PZU18BL	Z-diode	18V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HR	-	R3116K221A	Vdet-IC	2.2V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HR	-	SN74AUP1G98DRY	CMOS-Log	Configurable multiple-function gate	QFN-6	52	Log43	9m	Ti
HR	-	SN74AUP1G98DSF	CMOS-Log	Configurable multiple-function gate	µQFN	40	Log43	9m	Ti
HR	-	SN74AUP1G98YFP	CMOS-Log	Configurable multiple-function gate	µBGA-6	40	Log43	9v	Ti
HR	-	SN74AUP1G98YZP	CMOS-Log	Configurable multiple-function gate	BGA-6	40	Log43	9v	Ti
HR150	-	XC62HR1502DR-G	LVR-IC	LDO, 1.5V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR160	-	XC62HR1602DR-G	LVR-IC	LDO, 1.6V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR170	-	XC62HR1702DR-G	LVR-IC	LDO, 1.7V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR180	-	XC62HR1802DR-G	LVR-IC	LDO, 1.8V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR190	-	XC62HR1902DR-G	LVR-IC	LDO, 1.9V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR200	-	XC62HR2002DR-G	LVR-IC	LDO, 2.0V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR210	-	XC62HR2102DR-G	LVR-IC	LDO, 2.1V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR220	-	XC62HR2202DR-G	LVR-IC	LDO, 2.2V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR230	-	XC62HR2302DR-G	LVR-IC	LDO, 2.3V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR240	-	XC62HR2402DR-G	LVR-IC	LDO, 2.4V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR250	-	XC62HR2502DR-G	LVR-IC	LDO, 2.5V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR260	-	XC62HR2602DR-G	LVR-IC	LDO, 2.6V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR270	-	XC62HR2702DR-G	LVR-IC	LDO, 2.7V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR280	-	XC62HR2802DR-G	LVR-IC	LDO, 2.8V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR290	-	XC62HR2902DR-G	LVR-IC	LDO, 2.9V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR300	-	XC62HR3002DR-G	LVR-IC	LDO, 3.0V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR310	-	XC62HR3102DR-G	LVR-IC	LDO, 3.1V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR320	-	XC62HR3202DR-G	LVR-IC	LDO, 3.2V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR330	-	XC62HR3302DR-G	LVR-IC	LDO, 3.3V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR340	-	XC62HR3402DR-G	LVR-IC	LDO, 3.4V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR350	-	XC62HR3502DR-G	LVR-IC	LDO, 3.5V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR360	-	XC62HR3602DR-G	LVR-IC	LDO, 3.6V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR370	-	XC62HR3702DR-G	LVR-IC	LDO, 3.7V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR380	-	XC62HR3802DR-G	LVR-IC	LDO, 3.8V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR390	-	XC62HR3902DR-G	LVR-IC	LDO, 3.9V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR400	-	XC62HR4002DR-G	LVR-IC	LDO, 4.0V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR410	-	XC62HR4102DR-G	LVR-IC	LDO, 4.1V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR420	-	XC62HR4202DR-G	LVR-IC	LDO, 4.2V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR430	-	XC62HR4302DR-G	LVR-IC	LDO, 4.3V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR440	-	XC62HR4402DR-G	LVR-IC	LDO, 4.4V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR450	-	XC62HR4502DR-G	LVR-IC	LDO, 4.5V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR460	-	XC62HR4602DR-G	LVR-IC	LDO, 4.6V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR470	-	XC62HR4702DR-G	LVR-IC	LDO, 4.7V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR480	-	XC62HR4802DR-G	LVR-IC	LDO, 4.8V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR490	-	XC62HR4902DR-G	LVR-IC	LDO, 4.9V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR500	-	XC62HR5002DR-G	LVR-IC	LDO, 5.0V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR510	-	XC62HR5102DR-G	LVR-IC	LDO, 5.1V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR520	-	XC62HR5202DR-G	LVR-IC	LDO, 5.2V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR530	-	XC62HR5302DR-G	LVR-IC	LDO, 5.3V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR540	-	XC62HR5402DR-G	LVR-IC	LDO, 5.4V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR550	-	XC62HR5502DR-G	LVR-IC	LDO, 5.5V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR560	-	XC62HR5602DR-G	LVR-IC	LDO, 5.6V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR570	-	XC62HR5702DR-G	LVR-IC	LDO, 5.7V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR580	-	XC62HR5802DR-G	LVR-IC	LDO, 5.8V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR590	-	XC62HR5902DR-G	LVR-IC	LDO, 5.9V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HR600	-	XC62HR6002DR-G	LVR-IC	LDO, 6.0V±2%, 165mA, +CE	USP-6B	49s2	VR4	9b	Tor
HRA	-	XC6127N39A7R	Vdet-IC	3.9V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HRB	-	XC6127N39B7R	Vdet-IC	3.9V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HRC	-	XC6127N39C7R	Vdet-IC	3.9V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HRD	-	XC6127N39D7R	Vdet-IC	3.9V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HRE	-	XC6127N39E7R	Vdet-IC	3.9V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HRF	-	XC6127N39F7R	Vdet-IC	3.9V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HRH	-	XC6127N39G7R	Vdet-IC	3.9V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HRK	-	XC6127N39H7R	Vdet-IC	3.9V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HRL	-	XC6127N39J7R	Vdet-IC	3.9V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HRM	-	XC6127N39K7R	Vdet-IC	3.9V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HRN	-	XC6127N40A7R	Vdet-IC	4.0V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HRP	-	XC6127N40B7R	Vdet-IC	4.0V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HRR	-	XC6127N40C7R	Vdet-IC	4.0V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HRS	-	XC6127N40D7R	Vdet-IC	4.0V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HRT	-	XC6127N40E7R	Vdet-IC	4.0V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HRU	-	XC6127N40F7R	Vdet-IC	4.0V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HRV	-	XC6127N40G7R	Vdet-IC	4.0V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HRX	-	XC6127N40H7R	Vdet-IC	4.0V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HRY	-	XC6127N40J7R	Vdet-IC	4.0V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HRZ	-	XC6127N40K7R	Vdet-IC	4.0V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HS	-	PZU20BL	Z-diode	20V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HS	-	R3116K231A	Vdet-IC	2.3V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HS	-	SN74AUP1G74DQE	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	DFN-8	92	Log59	9m	Ti
HS	-	SN74AUP1G74RSE	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	QFN-8	85	Log59	9m	Ti
HS	-	SN74AUP1G74YFP	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	µBGA-8	50	Log59	9v	Ti
HS	-	SN74AUP1G74YZP	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	BGA-8	50	Log59	9v	Ti
HSA	-	XC6127N41A7R	Vdet-IC	4.1V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HSB	-	XC6127N41B7R	Vdet-IC	4.1V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HSC	-	XC6127N41C7R	Vdet-IC	4.1V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HSD	-	XC6127N41D7R	Vdet-IC	4.1V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HSE	-	XC6127N41E7R	Vdet-IC	4.1V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HSF	-	XC6127N41F7R	Vdet-IC	4.1V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HSH	-	XC6127N41G7R	Vdet-IC	4.1V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HSK	-	XC6127N41H7R	Vdet-IC	4.1V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HSL	-	XC6127N41J7R	Vdet-IC	4.1V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HSM	-	XC6127N41K7R	Vdet-IC	4.1V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HSN	-	XC6127N42A7R	Vdet-IC	4.2V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HSP	-	XC6127N42B7R	Vdet-IC	4.2V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HSR	-	XC6127N42C7R	Vdet-IC	4.2V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HSS	-	XC6127N42D7R	Vdet-IC	4.2V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HST	-	XC6127N42E7R	Vdet-IC	4.2V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HSU	-	XC6127N42F7R	Vdet-IC	4.2V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HSV	-	XC6127N42G7R	Vdet-IC	4.2V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HSX	-	XC6127N42H7R	Vdet-IC	4.2V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HSY	-	XC6127N42J7R	Vdet-IC	4.2V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HSZ	-	XC6127N42K7R	Vdet-IC	4.2V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HT	-	PZU22BL	Z-diode	22V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HT	-	R3116K241A	Vdet-IC	2.4V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HT	-	SN74AUP1G06DRY	CMOS-Log	Inverter (ODO)	QFN-6	52	Log19	9m	Ti
HT	-	SN74AUP1G06DSF	CMOS-Log	Inverter (ODO)	µQFN	80	Log19	9m	Ti
HT	-	SN74AUP1G06YFP	CMOS-Log	Inverter (ODO)	BGA-4	63	Log19	9v	Ti
HTA	-	XC6127N43A7R	Vdet-IC	4.3V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HTB	-	XC6127N43B7R	Vdet-IC	4.3V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HTC	-	XC6127N43C7R	Vdet-IC	4.3V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HTD	-	XC6127N43D7R	Vdet-IC	4.3V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HTE	-	XC6127N43E7R	Vdet-IC	4.3V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HTF	-	XC6127N43F7R	Vdet-IC	4.3V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HTH	-	XC6127N43G7R	Vdet-IC	4.3V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HTK	-	XC6127N43H7R	Vdet-IC	4.3V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HTL	-	XC6127N43J7R	Vdet-IC	4.3V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HTM	-	XC6127N43K7R	Vdet-IC	4.3V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HTN	-	XC6127N44A7R	Vdet-IC	4.4V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HTP	-	XC6127N44B7R	Vdet-IC	4.4V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HTR	-	XC6127N44C7R	Vdet-IC	4.4V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HTS	-	XC6127N44D7R	Vdet-IC	4.4V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HTT	-	XC6127N44E7R	Vdet-IC	4.4V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HTU	-	XC6127N44F7R	Vdet-IC	4.4V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HTV	-	XC6127N44G7R	Vdet-IC	4.4V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HTX	-	XC6127N44H7R	Vdet-IC	4.4V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HTY	-	XC6127N44J7R	Vdet-IC	4.4V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HTZ	-	XC6127N44K7R	Vdet-IC	4.4V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HU	-	PZU24BL	Z-diode	24V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HU	-	R3116K251A	Vdet-IC	2.5V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HUA	-	XC6127N45A7R	Vdet-IC	4.5V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HUB	-	XC6127N45B7R	Vdet-IC	4.5V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HUC	-	XC6127N45C7R	Vdet-IC	4.5V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HUD	-	XC6127N45D7R	Vdet-IC	4.5V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HUE	-	XC6127N45E7R	Vdet-IC	4.5V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HUF	-	XC6127N45F7R	Vdet-IC	4.5V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HUH	-	XC6127N45G7R	Vdet-IC	4.5V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HUK	-	XC6127N45H7R	Vdet-IC	4.5V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HUL	-	XC6127N45J7R	Vdet-IC	4.5V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HUM	-	XC6127N45K7R	Vdet-IC	4.5V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HUN	-	XC6127N46A7R	Vdet-IC	4.6V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HUP	-	XC6127N46B7R	Vdet-IC	4.6V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HUR	-	XC6127N46C7R	Vdet-IC	4.6V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HUS	-	XC6127N46D7R	Vdet-IC	4.6V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HUT	-	XC6127N46E7R	Vdet-IC	4.6V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HUU	-	XC6127N46F7R	Vdet-IC	4.6V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HUV	-	XC6127N46G7R	Vdet-IC	4.6V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HUX	-	XC6127N46H7R	Vdet-IC	4.6V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HUY	-	XC6127N46J7R	Vdet-IC	4.6V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HUZ	-	XC6127N46K7R	Vdet-IC	4.6V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HV	-	PZU27BL	Z-diode	27V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HV	-	R3116K261A	Vdet-IC	2.6V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HV	-	SN74AUP1G07DRY	CMOS-Log	Noninverting buffer/driver (ODO)	QFN-6	52	Log8	9m	Ti
HV	-	SN74AUP1G07DSF	CMOS-Log	Noninverting buffer/driver (ODO)	µQFN	80	Log8	9m	Ti
HV	-	SN74AUP1G07YFP	CMOS-Log	Noninverting buffer/driver (ODO)	BGA-4	63	Log8	9v	Ti
HV	-	SN74AUP1G07YZP	CMOS-Log	Noninverting buffer/driver (ODO)	BGA-5	46	Log8	9v	Ti
HVA	-	XC6127N47A7R	Vdet-IC	4.7V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HVB	-	XC6127N47B7R	Vdet-IC	4.7V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HVC	-	XC6127N47C7R	Vdet-IC	4.7V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HVD	-	XC6127N47D7R	Vdet-IC	4.7V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HVE	-	XC6127N47E7R	Vdet-IC	4.7V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HVF	-	XC6127N47F7R	Vdet-IC	4.7V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HVH	-	XC6127N47G7R	Vdet-IC	4.7V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HVK	-	XC6127N47H7R	Vdet-IC	4.7V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HVL	-	XC6127N47J7R	Vdet-IC	4.7V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HVM	-	XC6127N47K7R	Vdet-IC	4.7V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HVN	-	XC6127N48A7R	Vdet-IC	4.8V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HVP	-	XC6127N48B7R	Vdet-IC	4.8V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HVR	-	XC6127N48C7R	Vdet-IC	4.8V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HVS	-	XC6127N48D7R	Vdet-IC	4.8V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HVT	-	XC6127N48E7R	Vdet-IC	4.8V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HVU	-	XC6127N48F7R	Vdet-IC	4.8V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HVV	-	XC6127N48G7R	Vdet-IC	4.8V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HVX	-	XC6127N48H7R	Vdet-IC	4.8V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HVY	-	XC6127N48J7R	Vdet-IC	4.8V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HVZ	-	XC6127N48K7R	Vdet-IC	4.8V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HW	-	PZU30BL	Z-diode	30V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HW	-	R3116K271A	Vdet-IC	2.7V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HW	-	SN74AUP1G79DRY	CMOS-Log	Positive edge-triggered D-type flip-flop	QFN-6	52	Log20	9m	Ti
HW	-	SN74AUP1G79DSF	CMOS-Log	Positive edge-triggered D-type flip-flop	µQFN	80	Log20	9m	Ti
HW	-	SN74AUP1G79YFP	CMOS-Log	Positive edge-triggered D-type flip-flop	BGA-6	40	Log20	9v	Ti
HW	-	SN74AUP1G79YZP	CMOS-Log	Positive edge-triggered D-type flip-flop	BGA-5	46	Log20	9v	Ti
HX	-	PZU33BL	Z-diode	33V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HX	-	R3116K281A	Vdet-IC	2.8V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HX	-	SN74AUP1G80DRY	CMOS-Log	Positive edge-triggered D-type flip-flop	QFN-6	52	Log21	9m	Ti
HX	-	SN74AUP1G80DSF	CMOS-Log	Positive edge-triggered D-type flip-flop	µQFN	80	Log21	9m	Ti
HX	-	SN74AUP1G80YFP	CMOS-Log	Positive edge-triggered D-type flip-flop	BGA-6	40	Log21	9v	Ti
HX	-	SN74AUP1G80YZP	CMOS-Log	Positive edge-triggered D-type flip-flop	BGA-5	46	Log21	9v	Ti
HX	-	XC6221B45B7R	LVR-IC	LDO, 4.55V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
HX090	-	VRH0902LL	LVR-IC	LDO, 0.9V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX095	-	VRH0952LL	LVR-IC	LDO, 0.95V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX100	-	VRH1002LL	LVR-IC	LDO, 1.0V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX105	-	VRH1052LL	LVR-IC	LDO, 1.05V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX110	-	VRH1102LL	LVR-IC	LDO, 1.1V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX115	-	VRH1152LL	LVR-IC	LDO, 1.15V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX120	-	VRH1202LL	LVR-IC	LDO, 1.2V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX125	-	VRH1252LL	LVR-IC	LDO, 1.25V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX130	-	VRH1302LL	LVR-IC	LDO, 1.3V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX135	-	VRH1352LL	LVR-IC	LDO, 1.35V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX140	-	VRH1402LL	LVR-IC	LDO, 1.4V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX145	-	VRH1452LL	LVR-IC	LDO, 1.45V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX150	-	VRH1502LL	LVR-IC	LDO, 1.5V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX155	-	VRH1552LL	LVR-IC	LDO, 1.55V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX160	-	VRH1602LL	LVR-IC	LDO, 1.6V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX165	-	VRH1652LL	LVR-IC	LDO, 1.65V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX170	-	VRH1702LL	LVR-IC	LDO, 1.7V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX175	-	VRH1752LL	LVR-IC	LDO, 1.75V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HX180	-	VRH1802LL	LVR-IC	LDO, 1.8V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX185	-	VRH1852LL	LVR-IC	LDO, 1.85V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX190	-	VRH1902LL	LVR-IC	LDO, 1.9V±20mV, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX195	-	VRH1951NL	LVR-IC	LDO, 1.95V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX200	-	VRH2001NL	LVR-IC	LDO, 2.0V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX205	-	VRH2051NL	LVR-IC	LDO, 2.05V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX210	-	VRH2101NL	LVR-IC	LDO, 2.1V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX215	-	VRH2151NL	LVR-IC	LDO, 2.15V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX220	-	VRH2201NL	LVR-IC	LDO, 2.2V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX225	-	VRH2251NL	LVR-IC	LDO, 2.25V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX230	-	VRH2301NL	LVR-IC	LDO, 2.3V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX235	-	VRH2351NL	LVR-IC	LDO, 2.35V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX240	-	VRH2401NL	LVR-IC	LDO, 2.4V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX245	-	VRH2451NL	LVR-IC	LDO, 2.45V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX250	-	VRH2501NL	LVR-IC	LDO, 2.5V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX255	-	VRH2551NL	LVR-IC	LDO, 2.55V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX260	-	VRH2601NL	LVR-IC	LDO, 2.6V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX265	-	VRH2651NL	LVR-IC	LDO, 2.65V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX270	-	VRH2701NL	LVR-IC	LDO, 2.7V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX275	-	VRH2751NL	LVR-IC	LDO, 2.75V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX280	-	VRH2801NL	LVR-IC	LDO, 2.8V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX285	-	VRH2851NL	LVR-IC	LDO, 2.85V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX290	-	VRH2901NL	LVR-IC	LDO, 2.9V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX295	-	VRH2951NL	LVR-IC	LDO, 2.95V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX300	-	VRH3001NL	LVR-IC	LDO, 3.0V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX305	-	VRH3051NL	LVR-IC	LDO, 3.05V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX310	-	VRH3101NL	LVR-IC	LDO, 3.1V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX315	-	VRH3151NL	LVR-IC	LDO, 3.15V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX320	-	VRH3201NL	LVR-IC	LDO, 3.2V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX325	-	VRH3251NL	LVR-IC	LDO, 3.25V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX330	-	VRH3301NL	LVR-IC	LDO, 3.3V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX335	-	VRH3351NL	LVR-IC	LDO, 3.35V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX340	-	VRH3401NL	LVR-IC	LDO, 3.4V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX345	-	VRH3451NL	LVR-IC	LDO, 3.45V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX350	-	VRH3501NL	LVR-IC	LDO, 3.5V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX355	-	VRH3551NL	LVR-IC	LDO, 3.55V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX360	-	VRH3601NL	LVR-IC	LDO, 3.6V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX365	-	VRH3651NL	LVR-IC	LDO, 3.65V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX370	-	VRH3701NL	LVR-IC	LDO, 3.7V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX375	-	VRH3751NL	LVR-IC	LDO, 3.75V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX380	-	VRH3801NL	LVR-IC	LDO, 3.8V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX385	-	VRH3851NL	LVR-IC	LDO, 3.85V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX390	-	VRH3901NL	LVR-IC	LDO, 3.9V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX395	-	VRH3951NL	LVR-IC	LDO, 3.95V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX400	-	VRH4001NL	LVR-IC	LDO, 4.0V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX405	-	VRH4051NL	LVR-IC	LDO, 4.05V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX410	-	VRH4101NL	LVR-IC	LDO, 4.1V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX415	-	VRH4151NL	LVR-IC	LDO, 4.15V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX420	-	VRH4201NL	LVR-IC	LDO, 4.2V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX425	-	VRH4251NL	LVR-IC	LDO, 4.25V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX430	-	VRH4301NL	LVR-IC	LDO, 4.3V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX435	-	VRH4351NL	LVR-IC	LDO, 4.35V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX440	-	VRH4401NL	LVR-IC	LDO, 4.4V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX445	-	VRH4451NL	LVR-IC	LDO, 4.45V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX450	-	VRH4501NL	LVR-IC	LDO, 4.5V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX455	-	VRH4551NL	LVR-IC	LDO, 4.55V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX460	-	VRH4601NL	LVR-IC	LDO, 4.6V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX465	-	VRH4651NL	LVR-IC	LDO, 4.65V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX470	-	VRH4701NL	LVR-IC	LDO, 4.7V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX475	-	VRH4751NL	LVR-IC	LDO, 4.75V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX480	-	VRH4801NL	LVR-IC	LDO, 4.8V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX485	-	VRH4851NL	LVR-IC	LDO, 4.85V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX490	-	VRH4901NL	LVR-IC	LDO, 4.9V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX495	-	VRH4951NL	LVR-IC	LDO, 4.95V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HX500	-	VRH5001NL	LVR-IC	LDO, 5.0V±1%, 250mA, +CE	LLP-4	45vm	VR4	9r	Ans
HXA	-	XC6127N49A7R	Vdet-IC	4.9V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HXB	-	XC6127N49B7R	Vdet-IC	4.9V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HXC	-	XC6127N49C7R	Vdet-IC	4.9V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HXD	-	XC6127N49D7R	Vdet-IC	4.9V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HXE	-	XC6127N49E7R	Vdet-IC	4.9V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
HXF	-	XC6127N49F7R	Vdet-IC	4.9V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HXH	-	XC6127N49G7R	Vdet-IC	4.9V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HXK	-	XC6127N49H7R	Vdet-IC	4.9V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HXL	-	XC6127N49J7R	Vdet-IC	4.9V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HXM	-	XC6127N49K7R	Vdet-IC	4.9V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HXN	-	XC6127N50A7R	Vdet-IC	5.0V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HXP	-	XC6127N50B7R	Vdet-IC	5.0V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HXR	-	XC6127N50C7R	Vdet-IC	5.0V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HXS	-	XC6127N50D7R	Vdet-IC	5.0V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HXT	-	XC6127N50E7R	Vdet-IC	5.0V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HXU	-	XC6127N50F7R	Vdet-IC	5.0V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HXV	-	XC6127N50G7R	Vdet-IC	5.0V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HXX	-	XC6127N50H7R	Vdet-IC	5.0V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HXY	-	XC6127N50J7R	Vdet-IC	5.0V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HXZ	-	XC6127N50K7R	Vdet-IC	5.0V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HY	-	PZU36BL	Z-diode	36V±5%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HY	-	R3116K291A	Vdet-IC	2.9V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HY	-	SN74AUP1G99YZP	CMOS-Log	Ultra-configurable multiple function gate with 3-state output	BGA-8	50	Log84	9v	Ti
HY	-	XC6221B46B7R	LVR-IC	LDO, 4.65V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
HYA	-	XC6127N51A7R	Vdet-IC	5.1V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HYB	-	XC6127N51B7R	Vdet-IC	5.1V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HYC	-	XC6127N51C7R	Vdet-IC	5.1V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HYD	-	XC6127N51D7R	Vdet-IC	5.1V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HYE	-	XC6127N51E7R	Vdet-IC	5.1V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HYF	-	XC6127N51F7R	Vdet-IC	5.1V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HYH	-	XC6127N51G7R	Vdet-IC	5.1V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HYK	-	XC6127N51H7R	Vdet-IC	5.1V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HYL	-	XC6127N51J7R	Vdet-IC	5.1V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HYM	-	XC6127N51K7R	Vdet-IC	5.1V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HYN	-	XC6127N52A7R	Vdet-IC	5.2V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HYP	-	XC6127N52B7R	Vdet-IC	5.2V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HYR	-	XC6127N52C7R	Vdet-IC	5.2V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HYS	-	XC6127N52D7R	Vdet-IC	5.2V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HYT	-	XC6127N52E7R	Vdet-IC	5.2V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HYU	-	XC6127N52F7R	Vdet-IC	5.2V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HYV	-	XC6127N52G7R	Vdet-IC	5.2V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HYX	-	XC6127N52H7R	Vdet-IC	5.2V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HYY	-	XC6127N52J7R	Vdet-IC	5.2V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HYZ	-	XC6127N52K7R	Vdet-IC	5.2V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HZ	-	PZU2.7B2L	Z-diode	2.7V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
HZ	-	R3116K301A	Vdet-IC	3.0V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
HZ	-	XC6221B47B7R	LVR-IC	LDO, 4.75V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
HZA	-	XC6127N53A7R	Vdet-IC	5.3V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HZB	-	XC6127N53B7R	Vdet-IC	5.3V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HZC	-	XC6127N53C7R	Vdet-IC	5.3V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HZD	-	XC6127N53D7R	Vdet-IC	5.3V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HZE	-	XC6127N53E7R	Vdet-IC	5.3V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HZF	-	XC6127N53F7R	Vdet-IC	5.3V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HZH	-	XC6127N53G7R	Vdet-IC	5.3V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HZK	-	XC6127N53H7R	Vdet-IC	5.3V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HZL	-	XC6127N53J7R	Vdet-IC	5.3V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HZM	-	XC6127N53K7R	Vdet-IC	5.3V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HZN	-	XC6127N54A7R	Vdet-IC	5.4V±0.8%, -Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HZP	-	XC6127N54B7R	Vdet-IC	5.4V±0.8%, -Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HZR	-	XC6127N54C7R	Vdet-IC	5.4V±0.8%, -Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HZS	-	XC6127N54D7R	Vdet-IC	5.4V±0.8%, -Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HZT	-	XC6127N54E7R	Vdet-IC	5.4V±0.8%, -Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
HZU	-	XC6127N54F7R	Vdet-IC	5.4V±0.8%, +Reset ODO, -MR, Rt=50ms	USPN-4	58cc	VD4	9h	Tor
HZV	-	XC6127N54G7R	Vdet-IC	5.4V±0.8%, +Reset ODO, -MR, Rt=100ms	USPN-4	58cc	VD4	9h	Tor
HZX	-	XC6127N54H7R	Vdet-IC	5.4V±0.8%, +Reset ODO, -MR, Rt=200ms	USPN-4	58cc	VD4	9h	Tor
HZY	-	XC6127N54J7R	Vdet-IC	5.4V±0.8%, +Reset ODO, -MR, Rt=400ms	USPN-4	58cc	VD4	9h	Tor
HZZ	-	XC6127N54K7R	Vdet-IC	5.4V±0.8%, +Reset ODO, -MR, Rt=800ms	USPN-4	58cc	VD4	9h	Tor
I11	-	LD6918GDAW-11	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I11	-	LD6918GDDW-11	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I12	-	LD6918GDAW-12	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I12	-	LD6918GDDW-12	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I13	-	LD6918GDAW-13	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I13	-	LD6918GDDW-13	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I14	-	LD6918GDAW-14	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I14	-	LD6918GDDW-14	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
I1H	-	LD6918GDAW-1H	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1H	-	LD6918GDDW-1H	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1I	-	LD6918GDAW-1I	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1I	-	LD6918GDDW-1I	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1J	-	LD6918GDAW-1J	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1J	-	LD6918GDDW-1J	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1K	-	LD6918GDAW-1K	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1K	-	LD6918GDDW-1K	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1L	-	LD6918GDAW-1L	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1L	-	LD6918GDDW-1L	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1M	-	LD6918GDAW-1M	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1M	-	LD6918GDDW-1M	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1N	-	LD6918GDAW-1N	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1N	-	LD6918GDDW-1N	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1O	-	LD6918GDAW-1O	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1O	-	LD6918GDDW-1O	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1P	-	LD6918GDAW-1P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1P	-	LD6918GDDW-1P	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1Q	-	LD6918GDAW-1Q	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1Q	-	LD6918GDDW-1Q	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1R	-	LD6918GDAW-1R	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1R	-	LD6918GDDW-1R	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1S	-	LD6918GDAW-1S	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1S	-	LD6918GDDW-1S	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1T	-	LD6918GDAW-1T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1T	-	LD6918GDDW-1T	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1U	-	LD6918GDAW-1U	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1U	-	LD6918GDDW-1U	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1V	-	LD6918GDAW-1V	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1V	-	LD6918GDDW-1V	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1W	-	LD6918GDAW-1W	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1W	-	LD6918GDDW-1W	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1X	-	LD6918GDAW-1X	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1X	-	LD6918GDDW-1X	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1Y	-	LD6918GDAW-1Y	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1Y	-	LD6918GDDW-1Y	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I1Z	-	LD6918GDAW-1Z	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I1Z	-	LD6918GDDW-1Z	LVR-IC	LDO, Dual out, Vout1/Vout2=1.85V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I21	-	LD6918GDAW-21	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I21	-	LD6918GDDW-21	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I22	-	LD6918GDAW-22	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I22	-	LD6918GDDW-22	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I23	-	LD6918GDAW-23	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I23	-	LD6918GDDW-23	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I24	-	LD6918GDAW-24	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I24	-	LD6918GDDW-24	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2H	-	LD6918GDAW-2H	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2H	-	LD6918GDDW-2H	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2I	-	LD6918GDAW-2I	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2I	-	LD6918GDDW-2I	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2J	-	LD6918GDAW-2J	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2J	-	LD6918GDDW-2J	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2K	-	LD6918GDAW-2K	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2K	-	LD6918GDDW-2K	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2L	-	LD6918GDAW-2L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2L	-	LD6918GDDW-2L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2M	-	LD6918GDAW-2M	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2M	-	LD6918GDDW-2M	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2N	-	LD6918GDAW-2N	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2N	-	LD6918GDDW-2N	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2O	-	LD6918GDAW-2O	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2O	-	LD6918GDDW-2O	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2P	-	LD6918GDAW-2P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2P	-	LD6918GDDW-2P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2Q	-	LD6918GDAW-2Q	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2Q	-	LD6918GDDW-2Q	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2R	-	LD6918GDAW-2R	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2R	-	LD6918GDDW-2R	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2S	-	LD6918GDAW-2S	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2S	-	LD6918GDDW-2S	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
I2T	-	LD6918GDAW-2T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2T	-	LD6918GDDW-2T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2U	-	LD6918GDAW-2U	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2U	-	LD6918GDDW-2U	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2V	-	LD6918GDAW-2V	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2V	-	LD6918GDDW-2V	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2W	-	LD6918GDAW-2W	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2W	-	LD6918GDDW-2W	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2X	-	LD6918GDAW-2X	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2X	-	LD6918GDDW-2X	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2Y	-	LD6918GDAW-2Y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2Y	-	LD6918GDDW-2Y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I2Z	-	LD6918GDAW-2Z	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I2Z	-	LD6918GDDW-2Z	LVR-IC	LDO, Dual out, Vout1/Vout2=2.65V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I31	-	LD6918GDAW-31	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I31	-	LD6918GDDW-31	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I32	-	LD6918GDAW-32	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I32	-	LD6918GDDW-32	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I33	-	LD6918GDAW-33	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I33	-	LD6918GDDW-33	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I34	-	LD6918GDAW-34	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I34	-	LD6918GDDW-34	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3H	-	LD6918GDAW-3H	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3H	-	LD6918GDDW-3H	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3I	-	LD6918GDAW-3I	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3I	-	LD6918GDDW-3I	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3J	-	LD6918GDAW-3J	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3J	-	LD6918GDDW-3J	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3K	-	LD6918GDAW-3K	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3K	-	LD6918GDDW-3K	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3L	-	LD6918GDAW-3L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3L	-	LD6918GDDW-3L	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3M	-	LD6918GDAW-3M	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3M	-	LD6918GDDW-3M	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3N	-	LD6918GDAW-3N	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3N	-	LD6918GDDW-3N	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3O	-	LD6918GDAW-3O	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3O	-	LD6918GDDW-3O	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3P	-	LD6918GDAW-3P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3P	-	LD6918GDDW-3P	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3Q	-	LD6918GDAW-3Q	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3Q	-	LD6918GDDW-3Q	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3R	-	LD6918GDAW-3R	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3R	-	LD6918GDDW-3R	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3S	-	LD6918GDAW-3S	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3S	-	LD6918GDDW-3S	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3T	-	LD6918GDAW-3T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3T	-	LD6918GDDW-3T	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3U	-	LD6918GDAW-3U	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3U	-	LD6918GDDW-3U	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3V	-	LD6918GDAW-3V	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3V	-	LD6918GDDW-3V	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3W	-	LD6918GDAW-3W	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3W	-	LD6918GDDW-3W	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3X	-	LD6918GDAW-3X	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3X	-	LD6918GDDW-3X	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3Y	-	LD6918GDAW-3Y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3Y	-	LD6918GDDW-3Y	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I3Z	-	LD6918GDAW-3Z	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I3Z	-	LD6918GDDW-3Z	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4	-	LM48555TL	Lin-IC	AF PA, BTL, 2.7..5.5V, 15.7Vp-p, ceramic speaker, shutdown	BGA-12	39	-	9n	Nsc
I41	-	LD6918GDAW-41	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I41	-	LD6918GDDW-41	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I42	-	LD6918GDAW-42	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I42	-	LD6918GDDW-42	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I43	-	LD6918GDAW-43	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I43	-	LD6918GDDW-43	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I44	-	LD6918GDAW-44	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I44	-	LD6918GDDW-44	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4H	-	LD6918GDAW-4H	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
I4H	-	LD6918GDDW-4H	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4I	-	LD6918GDAW-4I	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4I	-	LD6918GDDW-4I	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4J	-	LD6918GDAW-4J	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4J	-	LD6918GDDW-4J	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4K	-	LD6918GDAW-4K	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4K	-	LD6918GDDW-4K	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4L	-	LD6918GDAW-4L	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4L	-	LD6918GDDW-4L	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4M	-	LD6918GDAW-4M	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4M	-	LD6918GDDW-4M	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4N	-	LD6918GDAW-4N	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4N	-	LD6918GDDW-4N	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4O	-	LD6918GDAW-4O	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4O	-	LD6918GDDW-4O	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4P	-	LD6918GDAW-4P	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4P	-	LD6918GDDW-4P	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4Q	-	LD6918GDAW-4Q	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4Q	-	LD6918GDDW-4Q	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4R	-	LD6918GDAW-4R	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4R	-	LD6918GDDW-4R	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4S	-	LD6918GDAW-4S	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4S	-	LD6918GDDW-4S	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4T	-	LD6918GDAW-4T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4T	-	LD6918GDDW-4T	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4U	-	LD6918GDAW-4U	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4U	-	LD6918GDDW-4U	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4V	-	LD6918GDAW-4V	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4V	-	LD6918GDDW-4V	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4W	-	LD6918GDAW-4W	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4W	-	LD6918GDDW-4W	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4X	-	LD6918GDAW-4X	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4X	-	LD6918GDDW-4X	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4Y	-	LD6918GDAW-4Y	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4Y	-	LD6918GDDW-4Y	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I4Z	-	LD6918GDAW-4Z	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
I4Z	-	LD6918GDDW-4Z	LVR-IC	LDO, Dual out, Vout1/Vout2=3.15V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
I5	-	LM48520TL	Lin-IC	AF PA, BTL,class-D, 2.6..5.5V, 2x1.1W(5V/8Ω), shutdown	BGA-25	39	-	9a	Nsc
IGH3	-	LM4949TL	Lin-IC	AF PA, BTL,class-D, 2.6..5.5V, 2x2.5W(8Ω)+2x190mW(32Ω), I2C	BGA-25	39	-	9j	Nsc
IH	-	LD6805K/20H	LVR-IC	LDO, 2.0V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
IH1	-	LD6918GDAW-H1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IH1	-	LD6918GDDW-H1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IH2	-	LD6918GDAW-H2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IH2	-	LD6918GDDW-H2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IH3	-	LD6918GDAW-H3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IH3	-	LD6918GDDW-H3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IH4	-	LD6918GDAW-H4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IH4	-	LD6918GDDW-H4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHH	-	LD6918GDAW-HH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHH	-	LD6918GDDW-HH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHI	-	LD6918GDAW-HI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHI	-	LD6918GDDW-HI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHJ	-	LD6918GDAW-HJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHJ	-	LD6918GDDW-HJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHK	-	LD6918GDAW-HK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHK	-	LD6918GDDW-HK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHL	-	LD6918GDAW-HL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHL	-	LD6918GDDW-HL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHM	-	LD6918GDAW-HM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHM	-	LD6918GDDW-HM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHN	-	LD6918GDAW-HN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHN	-	LD6918GDDW-HN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHO	-	LD6918GDAW-HO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHO	-	LD6918GDDW-HO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHP	-	LD6918GDAW-HP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHP	-	LD6918GDDW-HP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHQ	-	LD6918GDAW-HQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHQ	-	LD6918GDDW-HQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHR	-	LD6918GDAW-HR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHR	-	LD6918GDDW-HR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
IHS	-	LD6918GDAW-HS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHS	-	LD6918GDDW-HS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHT	-	LD6918GDAW-HT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHT	-	LD6918GDDW-HT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHU	-	LD6918GDAW-HU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHU	-	LD6918GDDW-HU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHV	-	LD6918GDAW-HV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHV	-	LD6918GDDW-HV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHW	-	LD6918GDAW-HW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHW	-	LD6918GDDW-HW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHX	-	LD6918GDAW-HX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHX	-	LD6918GDDW-HX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHY	-	LD6918GDAW-HY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHY	-	LD6918GDDW-HY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IHZ	-	LD6918GDAW-HZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IHZ	-	LD6918GDDW-HZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
II1	-	LD6918GDAW-I1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
II1	-	LD6918GDDW-I1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
II2	-	LD6918GDAW-I2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
II2	-	LD6918GDDW-I2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
II3	-	LD6918GDAW-I3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
II3	-	LD6918GDDW-I3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
II4	-	LD6918GDAW-I4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
II4	-	LD6918GDDW-I4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIH	-	LD6918GDAW-IH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIH	-	LD6918GDDW-IH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
III	-	LD6918GDAW-II	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
III	-	LD6918GDDW-II	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIJ	-	LD6918GDAW-IJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIJ	-	LD6918GDDW-IJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIK	-	LD6918GDAW-IK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIK	-	LD6918GDDW-IK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIL	-	LD6918GDAW-IL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIL	-	LD6918GDDW-IL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIM	-	LD6918GDAW-IM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIM	-	LD6918GDDW-IM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIN	-	LD6918GDAW-IN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIN	-	LD6918GDDW-IN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIO	-	LD6918GDAW-IO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIO	-	LD6918GDDW-IO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIP	-	LD6918GDAW-IP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIP	-	LD6918GDDW-IP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIQ	-	LD6918GDAW-IQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIQ	-	LD6918GDDW-IQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIR	-	LD6918GDAW-IR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIR	-	LD6918GDDW-IR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIS	-	LD6918GDAW-IS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIS	-	LD6918GDDW-IS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIT	-	LD6918GDAW-IT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIT	-	LD6918GDDW-IT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIU	-	LD6918GDAW-IU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIU	-	LD6918GDDW-IU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIV	-	LD6918GDAW-IV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIV	-	LD6918GDDW-IV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIW	-	LD6918GDAW-IW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIW	-	LD6918GDDW-IW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIX	-	LD6918GDAW-IX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIX	-	LD6918GDDW-IX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIY	-	LD6918GDAW-IY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIY	-	LD6918GDDW-IY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IIZ	-	LD6918GDAW-IZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IIZ	-	LD6918GDDW-IZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.6V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJ1	-	LD6918GDAW-J1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJ1	-	LD6918GDDW-J1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJ2	-	LD6918GDAW-J2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJ2	-	LD6918GDDW-J2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJ3	-	LD6918GDAW-J3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJ3	-	LD6918GDDW-J3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJ4	-	LD6918GDAW-J4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJ4	-	LD6918GDDW-J4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
IJH	-	LD6918GDAW-JH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJH	-	LD6918GDDW-JH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJI	-	LD6918GDAW-JI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJI	-	LD6918GDDW-JI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJJ	-	LD6918GDAW-JJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJJ	-	LD6918GDDW-JJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJK	-	LD6918GDAW-JK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJK	-	LD6918GDDW-JK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJL	-	LD6918GDAW-JL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJL	-	LD6918GDDW-JL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJM	-	LD6918GDAW-JM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJM	-	LD6918GDDW-JM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJN	-	LD6918GDAW-JN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJN	-	LD6918GDDW-JN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJO	-	LD6918GDAW-JO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJO	-	LD6918GDDW-JO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJP	-	LD6918GDAW-JP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJP	-	LD6918GDDW-JP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJQ	-	LD6918GDAW-JQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJQ	-	LD6918GDDW-JQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJR	-	LD6918GDAW-JR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJR	-	LD6918GDDW-JR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJS	-	LD6918GDAW-JS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJS	-	LD6918GDDW-JS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJT	-	LD6918GDAW-JT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJT	-	LD6918GDDW-JT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJU	-	LD6918GDAW-JU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJU	-	LD6918GDDW-JU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJV	-	LD6918GDAW-JV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJV	-	LD6918GDDW-JV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJW	-	LD6918GDAW-JW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJW	-	LD6918GDDW-JW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJX	-	LD6918GDAW-JX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJX	-	LD6918GDDW-JX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJY	-	LD6918GDAW-JY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJY	-	LD6918GDDW-JY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IJZ	-	LD6918GDAW-JZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IJZ	-	LD6918GDDW-JZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.7V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IK1	-	LD6918GDAW-K1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IK1	-	LD6918GDDW-K1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IK2	-	LD6918GDAW-K2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IK2	-	LD6918GDDW-K2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IK3	-	LD6918GDAW-K3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IK3	-	LD6918GDDW-K3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IK4	-	LD6918GDAW-K4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IK4	-	LD6918GDDW-K4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKH	-	LD6918GDAW-KH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKH	-	LD6918GDDW-KH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKI	-	LD6918GDAW-KI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKI	-	LD6918GDDW-KI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKJ	-	LD6918GDAW-KJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKJ	-	LD6918GDDW-KJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKK	-	LD6918GDAW-KK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKK	-	LD6918GDDW-KK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKL	-	LD6918GDAW-KL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKL	-	LD6918GDDW-KL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKM	-	LD6918GDAW-KM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKM	-	LD6918GDDW-KM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKN	-	LD6918GDAW-KN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKN	-	LD6918GDDW-KN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKO	-	LD6918GDAW-KO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKO	-	LD6918GDDW-KO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKP	-	LD6918GDAW-KP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKP	-	LD6918GDDW-KP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKQ	-	LD6918GDAW-KQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKQ	-	LD6918GDDW-KQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKR	-	LD6918GDAW-KR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKR	-	LD6918GDDW-KR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKS	-	LD6918GDAW-KS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKS	-	LD6918GDDW-KS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
IKT	-	LD6918GDAW-KT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKT	-	LD6918GDDW-KT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKU	-	LD6918GDAW-KU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKU	-	LD6918GDDW-KU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKV	-	LD6918GDAW-KV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKV	-	LD6918GDDW-KV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKW	-	LD6918GDAW-KW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKW	-	LD6918GDDW-KW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKX	-	LD6918GDAW-KX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKX	-	LD6918GDDW-KX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKY	-	LD6918GDAW-KY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKY	-	LD6918GDDW-KY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IKZ	-	LD6918GDAW-KZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IKZ	-	LD6918GDDW-KZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IL1	-	LD6918GDAW-L1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IL1	-	LD6918GDDW-L1	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IL2	-	LD6918GDAW-L2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IL2	-	LD6918GDDW-L2	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IL3	-	LD6918GDAW-L3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IL3	-	LD6918GDDW-L3	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IL4	-	LD6918GDAW-L4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IL4	-	LD6918GDDW-L4	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILH	-	LD6918GDAW-LH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILH	-	LD6918GDDW-LH	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILI	-	LD6918GDAW-LI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILI	-	LD6918GDDW-LI	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILJ	-	LD6918GDAW-LJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILJ	-	LD6918GDDW-LJ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILK	-	LD6918GDAW-LK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILK	-	LD6918GDDW-LK	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILL	-	LD6918GDAW-LL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILL	-	LD6918GDDW-LL	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILM	-	LD6918GDAW-LM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILM	-	LD6918GDDW-LM	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILN	-	LD6918GDAW-LN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILN	-	LD6918GDDW-LN	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILO	-	LD6918GDAW-LO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILO	-	LD6918GDDW-LO	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILP	-	LD6918GDAW-LP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILP	-	LD6918GDDW-LP	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILQ	-	LD6918GDAW-LQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILQ	-	LD6918GDDW-LQ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILR	-	LD6918GDAW-LR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILR	-	LD6918GDDW-LR	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILS	-	LD6918GDAW-LS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILS	-	LD6918GDDW-LS	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILT	-	LD6918GDAW-LT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILT	-	LD6918GDDW-LT	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILU	-	LD6918GDAW-LU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILU	-	LD6918GDDW-LU	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILV	-	LD6918GDAW-LV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILV	-	LD6918GDDW-LV	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILW	-	LD6918GDAW-LW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILW	-	LD6918GDDW-LW	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILX	-	LD6918GDAW-LX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILX	-	LD6918GDDW-LX	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILY	-	LD6918GDAW-LY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILY	-	LD6918GDDW-LY	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ILZ	-	LD6918GDAW-LZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ILZ	-	LD6918GDDW-LZ	LVR-IC	LDO, Dual out, Vout1/Vout2=1.9V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IM1	-	LD6918GDAW-M1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IM1	-	LD6918GDDW-M1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IM2	-	LD6918GDAW-M2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IM2	-	LD6918GDDW-M2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IM3	-	LD6918GDAW-M3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IM3	-	LD6918GDDW-M3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IM4	-	LD6918GDAW-M4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IM4	-	LD6918GDDW-M4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMH	-	LD6918GDAW-MH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMH	-	LD6918GDDW-MH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
IMI	-	LD6918GDAW-MI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMI	-	LD6918GDDW-MI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMJ	-	LD6918GDAW-MJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMJ	-	LD6918GDDW-MJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMK	-	LD6918GDAW-MK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMK	-	LD6918GDDW-MK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IML	-	LD6918GDAW-ML	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IML	-	LD6918GDDW-ML	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMM	-	LD6918GDAW-MM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMM	-	LD6918GDDW-MM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMN	-	LD6918GDAW-MN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMN	-	LD6918GDDW-MN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMO	-	LD6918GDAW-MO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMO	-	LD6918GDDW-MO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMP	-	LD6918GDAW-MP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMP	-	LD6918GDDW-MP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMQ	-	LD6918GDAW-MQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMQ	-	LD6918GDDW-MQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMR	-	LD6918GDAW-MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMR	-	LD6918GDDW-MR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMS	-	LD6918GDAW-MS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMS	-	LD6918GDDW-MS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMT	-	LD6918GDAW-MT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMT	-	LD6918GDDW-MT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMU	-	LD6918GDAW-MU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMU	-	LD6918GDDW-MU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMV	-	LD6918GDAW-MV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMV	-	LD6918GDDW-MV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMW	-	LD6918GDAW-MW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMW	-	LD6918GDDW-MW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMX	-	LD6918GDAW-MX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMX	-	LD6918GDDW-MX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMY	-	LD6918GDAW-MY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMY	-	LD6918GDDW-MY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IMZ	-	LD6918GDAW-MZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IMZ	-	LD6918GDDW-MZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.0V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IN1	-	LD6918GDAW-N1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IN1	-	LD6918GDDW-N1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IN2	-	LD6918GDAW-N2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IN2	-	LD6918GDDW-N2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IN3	-	LD6918GDAW-N3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IN3	-	LD6918GDDW-N3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IN4	-	LD6918GDAW-N4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IN4	-	LD6918GDDW-N4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INH	-	LD6918GDAW-NH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INH	-	LD6918GDDW-NH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INI	-	LD6918GDAW-NI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INI	-	LD6918GDDW-NI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INJ	-	LD6918GDAW-NJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INJ	-	LD6918GDDW-NJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INK	-	LD6918GDAW-NK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INK	-	LD6918GDDW-NK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INL	-	LD6918GDAW-NL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INL	-	LD6918GDDW-NL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INM	-	LD6918GDAW-NM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INM	-	LD6918GDDW-NM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INN	-	LD6918GDAW-NN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INN	-	LD6918GDDW-NN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INO	-	LD6918GDAW-NO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INO	-	LD6918GDDW-NO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INP	-	LD6918GDAW-NP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INP	-	LD6918GDDW-NP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INQ	-	LD6918GDAW-NQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INQ	-	LD6918GDDW-NQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INR	-	LD6918GDAW-NR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INR	-	LD6918GDDW-NR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INS	-	LD6918GDAW-NS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INS	-	LD6918GDDW-NS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INT	-	LD6918GDAW-NT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INT	-	LD6918GDDW-NT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
INU	-	LD6918GDAW-NU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INU	-	LD6918GDDW-NU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INV	-	LD6918GDAW-NV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INV	-	LD6918GDDW-NV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INW	-	LD6918GDAW-NW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INW	-	LD6918GDDW-NW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INX	-	LD6918GDAW-NX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INX	-	LD6918GDDW-NX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INY	-	LD6918GDAW-NY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INY	-	LD6918GDDW-NY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
INZ	-	LD6918GDAW-NZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
INZ	-	LD6918GDDW-NZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IO1	-	LD6918GDAW-O1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IO1	-	LD6918GDDW-O1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IO2	-	LD6918GDAW-O2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IO2	-	LD6918GDDW-O2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IO3	-	LD6918GDAW-O3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IO3	-	LD6918GDDW-O3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IO4	-	LD6918GDAW-O4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IO4	-	LD6918GDDW-O4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOH	-	LD6918GDAW-OH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOH	-	LD6918GDDW-OH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOI	-	LD6918GDAW-OI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOI	-	LD6918GDDW-OI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOJ	-	LD6918GDAW-OJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOJ	-	LD6918GDDW-OJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOK	-	LD6918GDAW-OK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOK	-	LD6918GDDW-OK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOL	-	LD6918GDAW-OL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOL	-	LD6918GDDW-OL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOM	-	LD6918GDAW-OM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOM	-	LD6918GDDW-OM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ION	-	LD6918GDAW-ON	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ION	-	LD6918GDDW-ON	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOO	-	LD6918GDAW-OO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOO	-	LD6918GDDW-OO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOP	-	LD6918GDAW-OP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOP	-	LD6918GDDW-OP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOQ	-	LD6918GDAW-OQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOQ	-	LD6918GDDW-OQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOR	-	LD6918GDAW-OR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOR	-	LD6918GDDW-OR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOS	-	LD6918GDAW-OS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOS	-	LD6918GDDW-OS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOT	-	LD6918GDAW-OT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOT	-	LD6918GDDW-OT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOU	-	LD6918GDAW-OU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOU	-	LD6918GDDW-OU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOV	-	LD6918GDAW-OV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOV	-	LD6918GDDW-OV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOW	-	LD6918GDAW-OW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOW	-	LD6918GDDW-OW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOX	-	LD6918GDAW-OX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOX	-	LD6918GDDW-OX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOY	-	LD6918GDAW-OY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOY	-	LD6918GDDW-OY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IOZ	-	LD6918GDAW-OZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IOZ	-	LD6918GDDW-OZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.2V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IP	-	LD6805K/20P	LVR-IC	LDO, 2.0V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
IP1	-	LD6918GDAW-P1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IP1	-	LD6918GDDW-P1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IP2	-	LD6918GDAW-P2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IP2	-	LD6918GDDW-P2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IP3	-	LD6918GDAW-P3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IP3	-	LD6918GDDW-P3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IP4	-	LD6918GDAW-P4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IP4	-	LD6918GDDW-P4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPH	-	LD6918GDAW-PH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPH	-	LD6918GDDW-PH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPI	-	LD6918GDAW-PI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
IPI	-	LD6918GDDW-PI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPJ	-	LD6918GDAW-PJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPJ	-	LD6918GDDW-PJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPK	-	LD6918GDAW-PK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPK	-	LD6918GDDW-PK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPL	-	LD6918GDAW-PL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPL	-	LD6918GDDW-PL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPM	-	LD6918GDAW-PM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPM	-	LD6918GDDW-PM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPN	-	LD6918GDAW-PN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPN	-	LD6918GDDW-PN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPO	-	LD6918GDAW-PO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPO	-	LD6918GDDW-PO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPP	-	LD6918GDAW-PP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPP	-	LD6918GDDW-PP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPQ	-	LD6918GDAW-PQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPQ	-	LD6918GDDW-PQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPR	-	LD6918GDAW-PR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPR	-	LD6918GDDW-PR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPS	-	LD6918GDAW-PS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPS	-	LD6918GDDW-PS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPT	-	LD6918GDAW-PT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPT	-	LD6918GDDW-PT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPU	-	LD6918GDAW-PU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPU	-	LD6918GDDW-PU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPV	-	LD6918GDAW-PV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPV	-	LD6918GDDW-PV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPW	-	LD6918GDAW-PW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPW	-	LD6918GDDW-PW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPX	-	LD6918GDAW-PX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPX	-	LD6918GDDW-PX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPY	-	LD6918GDAW-PY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPY	-	LD6918GDDW-PY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IPZ	-	LD6918GDAW-PZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IPZ	-	LD6918GDDW-PZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQ1	-	LD6918GDAW-Q1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQ1	-	LD6918GDDW-Q1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQ2	-	LD6918GDAW-Q2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQ2	-	LD6918GDDW-Q2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQ3	-	LD6918GDAW-Q3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQ3	-	LD6918GDDW-Q3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQ4	-	LD6918GDAW-Q4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQ4	-	LD6918GDDW-Q4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQH	-	LD6918GDAW-QH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQH	-	LD6918GDDW-QH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQI	-	LD6918GDAW-QI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQI	-	LD6918GDDW-QI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQJ	-	LD6918GDAW-QJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQJ	-	LD6918GDDW-QJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQK	-	LD6918GDAW-QK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQK	-	LD6918GDDW-QK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQL	-	LD6918GDAW-QL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQL	-	LD6918GDDW-QL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQM	-	LD6918GDAW-QM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQM	-	LD6918GDDW-QM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQN	-	LD6918GDAW-QN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQN	-	LD6918GDDW-QN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQO	-	LD6918GDAW-QO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQO	-	LD6918GDDW-QO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQP	-	LD6918GDAW-QP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQP	-	LD6918GDDW-QP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQQ	-	LD6918GDAW-QQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQQ	-	LD6918GDDW-QQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQR	-	LD6918GDAW-QR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQR	-	LD6918GDDW-QR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQS	-	LD6918GDAW-QS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQS	-	LD6918GDDW-QS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQT	-	LD6918GDAW-QT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQT	-	LD6918GDDW-QT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQU	-	LD6918GDAW-QU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr








SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
IQU	-	LD6918GDDW-QU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQV	-	LD6918GDAW-QV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQV	-	LD6918GDDW-QV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQW	-	LD6918GDAW-QW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQW	-	LD6918GDDW-QW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQX	-	LD6918GDAW-QX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQX	-	LD6918GDDW-QX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQY	-	LD6918GDAW-QY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQY	-	LD6918GDDW-QY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IQZ	-	LD6918GDAW-QZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IQZ	-	LD6918GDDW-QZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.4V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IR1	-	LD6918GDAW-R1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IR1	-	LD6918GDDW-R1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IR2	-	LD6918GDAW-R2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IR2	-	LD6918GDDW-R2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IR3	-	LD6918GDAW-R3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IR3	-	LD6918GDDW-R3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IR4	-	LD6918GDAW-R4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IR4	-	LD6918GDDW-R4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRH	-	LD6918GDAW-RH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRH	-	LD6918GDDW-RH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRI	-	LD6918GDAW-RI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRI	-	LD6918GDDW-RI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRJ	-	LD6918GDAW-RJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRJ	-	LD6918GDDW-RJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRK	-	LD6918GDAW-RK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRK	-	LD6918GDDW-RK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRL	-	LD6918GDAW-RL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRL	-	LD6918GDDW-RL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRM	-	LD6918GDAW-RM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRM	-	LD6918GDDW-RM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRN	-	LD6918GDAW-RN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRN	-	LD6918GDDW-RN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRO	-	LD6918GDAW-RO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRO	-	LD6918GDDW-RO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRP	-	LD6918GDAW-RP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRP	-	LD6918GDDW-RP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRQ	-	LD6918GDAW-RQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRQ	-	LD6918GDDW-RQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRR	-	LD6918GDAW-RR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRR	-	LD6918GDDW-RR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRS	-	LD6918GDAW-RS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRS	-	LD6918GDDW-RS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRT	-	LD6918GDAW-RT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRT	-	LD6918GDDW-RT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRU	-	LD6918GDAW-RU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRU	-	LD6918GDDW-RU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRV	-	LD6918GDAW-RV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRV	-	LD6918GDDW-RV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRW	-	LD6918GDAW-RW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRW	-	LD6918GDDW-RW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRX	-	LD6918GDAW-RX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRX	-	LD6918GDDW-RX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRY	-	LD6918GDAW-RY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRY	-	LD6918GDDW-RY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IRZ	-	LD6918GDAW-RZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IRZ	-	LD6918GDDW-RZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IS1	-	LD6918GDAW-S1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IS1	-	LD6918GDDW-S1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IS2	-	LD6918GDAW-S2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IS2	-	LD6918GDDW-S2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IS3	-	LD6918GDAW-S3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IS3	-	LD6918GDDW-S3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IS4	-	LD6918GDAW-S4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IS4	-	LD6918GDDW-S4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISH	-	LD6918GDAW-SH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISH	-	LD6918GDDW-SH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISI	-	LD6918GDAW-SI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISI	-	LD6918GDDW-SI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISJ	-	LD6918GDAW-SJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ISJ	-	LD6918GDDW-SJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISK	-	LD6918GDAW-SK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISK	-	LD6918GDDW-SK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISL	-	LD6918GDAW-SL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISL	-	LD6918GDDW-SL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISM	-	LD6918GDAW-SM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISM	-	LD6918GDDW-SM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISN	-	LD6918GDAW-SN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISN	-	LD6918GDDW-SN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISO	-	LD6918GDAW-SO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISO	-	LD6918GDDW-SO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISP	-	LD6918GDAW-SP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISP	-	LD6918GDDW-SP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISQ	-	LD6918GDAW-SQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISQ	-	LD6918GDDW-SQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISR	-	LD6918GDAW-SR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISR	-	LD6918GDDW-SR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISS	-	LD6918GDAW-SS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISS	-	LD6918GDDW-SS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IST	-	LD6918GDAW-ST	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IST	-	LD6918GDDW-ST	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISU	-	LD6918GDAW-SU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISU	-	LD6918GDDW-SU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISV	-	LD6918GDAW-SV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISV	-	LD6918GDDW-SV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISW	-	LD6918GDAW-SW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISW	-	LD6918GDDW-SW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISX	-	LD6918GDAW-SX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISX	-	LD6918GDDW-SX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISY	-	LD6918GDAW-SY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISY	-	LD6918GDDW-SY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ISZ	-	LD6918GDAW-SZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ISZ	-	LD6918GDDW-SZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.6V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IT1	-	LD6918GDAW-T1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IT1	-	LD6918GDDW-T1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IT2	-	LD6918GDAW-T2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IT2	-	LD6918GDDW-T2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IT3	-	LD6918GDAW-T3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IT3	-	LD6918GDDW-T3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IT4	-	LD6918GDAW-T4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IT4	-	LD6918GDDW-T4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITH	-	LD6918GDAW-TH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITH	-	LD6918GDDW-TH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITI	-	LD6918GDAW-TI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITI	-	LD6918GDDW-TI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITJ	-	LD6918GDAW-TJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITJ	-	LD6918GDDW-TJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITK	-	LD6918GDAW-TK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITK	-	LD6918GDDW-TK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITL	-	LD6918GDAW-TL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITL	-	LD6918GDDW-TL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITM	-	LD6918GDAW-TM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITM	-	LD6918GDDW-TM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITN	-	LD6918GDAW-TN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITN	-	LD6918GDDW-TN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITO	-	LD6918GDAW-TO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITO	-	LD6918GDDW-TO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITP	-	LD6918GDAW-TP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITP	-	LD6918GDDW-TP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITQ	-	LD6918GDAW-TQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITQ	-	LD6918GDDW-TQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITR	-	LD6918GDAW-TR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITR	-	LD6918GDDW-TR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITS	-	LD6918GDAW-TS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITS	-	LD6918GDDW-TS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITT	-	LD6918GDAW-TT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITT	-	LD6918GDDW-TT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITU	-	LD6918GDAW-TU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITU	-	LD6918GDDW-TU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITV	-	LD6918GDAW-TV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ITV	-	LD6918GDDW-TV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITW	-	LD6918GDAW-TW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITW	-	LD6918GDDW-TW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITX	-	LD6918GDAW-TX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITX	-	LD6918GDDW-TX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITY	-	LD6918GDAW-TY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITY	-	LD6918GDDW-TY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
ITZ	-	LD6918GDAW-TZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
ITZ	-	LD6918GDDW-TZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.7V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IU1	-	LD6918GDAW-U1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IU1	-	LD6918GDDW-U1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IU2	-	LD6918GDAW-U2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IU2	-	LD6918GDDW-U2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IU3	-	LD6918GDAW-U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IU3	-	LD6918GDDW-U3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IU4	-	LD6918GDAW-U4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IU4	-	LD6918GDDW-U4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUH	-	LD6918GDAW-UH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUH	-	LD6918GDDW-UH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUI	-	LD6918GDAW-UI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUI	-	LD6918GDDW-UI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUJ	-	LD6918GDAW-UJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUJ	-	LD6918GDDW-UJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUK	-	LD6918GDAW-UK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUK	-	LD6918GDDW-UK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUL	-	LD6918GDAW-UL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUL	-	LD6918GDDW-UL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUM	-	LD6918GDAW-UM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUM	-	LD6918GDDW-UM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUN	-	LD6918GDAW-UN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUN	-	LD6918GDDW-UN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUO	-	LD6918GDAW-UO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUO	-	LD6918GDDW-UO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUP	-	LD6918GDAW-UP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUP	-	LD6918GDDW-UP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUQ	-	LD6918GDAW-UQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUQ	-	LD6918GDDW-UQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUR	-	LD6918GDAW-UR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUR	-	LD6918GDDW-UR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUS	-	LD6918GDAW-US	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUS	-	LD6918GDDW-US	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUT	-	LD6918GDAW-UT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUT	-	LD6918GDDW-UT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUU	-	LD6918GDAW-UU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUU	-	LD6918GDDW-UU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUV	-	LD6918GDAW-UV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUV	-	LD6918GDDW-UV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUW	-	LD6918GDAW-UW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUW	-	LD6918GDDW-UW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUX	-	LD6918GDAW-UX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUX	-	LD6918GDDW-UX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUY	-	LD6918GDAW-UY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUY	-	LD6918GDDW-UY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IUZ	-	LD6918GDAW-UZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IUZ	-	LD6918GDDW-UZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IV1	-	LD6918GDAW-V1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IV1	-	LD6918GDDW-V1	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IV2	-	LD6918GDAW-V2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IV2	-	LD6918GDDW-V2	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IV3	-	LD6918GDAW-V3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IV3	-	LD6918GDDW-V3	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IV4	-	LD6918GDAW-V4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IV4	-	LD6918GDDW-V4	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVH	-	LD6918GDAW-VH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVH	-	LD6918GDDW-VH	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVI	-	LD6918GDAW-VI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVI	-	LD6918GDDW-VI	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVJ	-	LD6918GDAW-VJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVJ	-	LD6918GDDW-VJ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVK	-	LD6918GDAW-VK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
IVK	-	LD6918GDDW-VK	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVL	-	LD6918GDAW-VL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVL	-	LD6918GDDW-VL	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVM	-	LD6918GDAW-VM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVM	-	LD6918GDDW-VM	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVN	-	LD6918GDAW-VN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVN	-	LD6918GDDW-VN	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVO	-	LD6918GDAW-VO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVO	-	LD6918GDDW-VO	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVP	-	LD6918GDAW-VP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVP	-	LD6918GDDW-VP	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVQ	-	LD6918GDAW-VQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVQ	-	LD6918GDDW-VQ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVR	-	LD6918GDAW-VR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVR	-	LD6918GDDW-VR	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVS	-	LD6918GDAW-VS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVS	-	LD6918GDDW-VS	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVT	-	LD6918GDAW-VT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVT	-	LD6918GDDW-VT	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVU	-	LD6918GDAW-VU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVU	-	LD6918GDDW-VU	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVV	-	LD6918GDAW-VV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVV	-	LD6918GDDW-VV	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVW	-	LD6918GDAW-VW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVW	-	LD6918GDDW-VW	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVX	-	LD6918GDAW-VX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVX	-	LD6918GDDW-VX	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVY	-	LD6918GDAW-VY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVY	-	LD6918GDDW-VY	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IVZ	-	LD6918GDAW-VZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IVZ	-	LD6918GDDW-VZ	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IW1	-	LD6918GDAW-W1	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IW1	-	LD6918GDDW-W1	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IW2	-	LD6918GDAW-W2	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IW2	-	LD6918GDDW-W2	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IW3	-	LD6918GDAW-W3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IW3	-	LD6918GDDW-W3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IW4	-	LD6918GDAW-W4	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IW4	-	LD6918GDDW-W4	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWH	-	LD6918GDAW-WH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWH	-	LD6918GDDW-WH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWI	-	LD6918GDAW-WI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWI	-	LD6918GDDW-WI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWJ	-	LD6918GDAW-WJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWJ	-	LD6918GDDW-WJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWK	-	LD6918GDAW-WK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWK	-	LD6918GDDW-WK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWL	-	LD6918GDAW-WL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWL	-	LD6918GDDW-WL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWM	-	LD6918GDAW-WM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWM	-	LD6918GDDW-WM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWN	-	LD6918GDAW-WN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWN	-	LD6918GDDW-WN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWO	-	LD6918GDAW-WO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWO	-	LD6918GDDW-WO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWP	-	LD6918GDAW-WP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWP	-	LD6918GDDW-WP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWQ	-	LD6918GDAW-WQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWQ	-	LD6918GDDW-WQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWR	-	LD6918GDAW-WR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWR	-	LD6918GDDW-WR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWS	-	LD6918GDAW-WS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWS	-	LD6918GDDW-WS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWT	-	LD6918GDAW-WT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWT	-	LD6918GDDW-WT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWU	-	LD6918GDAW-WU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWU	-	LD6918GDDW-WU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWV	-	LD6918GDAW-WV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWV	-	LD6918GDDW-WV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWW	-	LD6918GDAW-WW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
IWW	-	LD6918GDDW-WW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWX	-	LD6918GDAW-WX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWX	-	LD6918GDDW-WX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWY	-	LD6918GDAW-WY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWY	-	LD6918GDDW-WY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IWZ	-	LD6918GDAW-WZ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IWZ	-	LD6918GDDW-WZ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IX1	-	LD6918GDAW-X1	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IX1	-	LD6918GDDW-X1	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IX2	-	LD6918GDAW-X2	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IX2	-	LD6918GDDW-X2	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IX3	-	LD6918GDAW-X3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IX3	-	LD6918GDDW-X3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IX4	-	LD6918GDAW-X4	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IX4	-	LD6918GDDW-X4	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXH	-	LD6918GDAW-XH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXH	-	LD6918GDDW-XH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXI	-	LD6918GDAW-XI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXI	-	LD6918GDDW-XI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXJ	-	LD6918GDAW-XJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXJ	-	LD6918GDDW-XJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXK	-	LD6918GDAW-XK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXK	-	LD6918GDDW-XK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXL	-	LD6918GDAW-XL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXL	-	LD6918GDDW-XL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXM	-	LD6918GDAW-XM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXM	-	LD6918GDDW-XM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXN	-	LD6918GDAW-XN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXN	-	LD6918GDDW-XN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXO	-	LD6918GDAW-XO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXO	-	LD6918GDDW-XO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXP	-	LD6918GDAW-XP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXP	-	LD6918GDDW-XP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXQ	-	LD6918GDAW-XQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXQ	-	LD6918GDDW-XQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXR	-	LD6918GDAW-XR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXR	-	LD6918GDDW-XR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXS	-	LD6918GDAW-XS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXS	-	LD6918GDDW-XS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXT	-	LD6918GDAW-XT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXT	-	LD6918GDDW-XT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXU	-	LD6918GDAW-XU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXU	-	LD6918GDDW-XU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXV	-	LD6918GDAW-XV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXV	-	LD6918GDDW-XV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXW	-	LD6918GDAW-XW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXW	-	LD6918GDDW-XW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXX	-	LD6918GDAW-XX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXX	-	LD6918GDDW-XX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXY	-	LD6918GDAW-XY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXY	-	LD6918GDDW-XY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IXZ	-	LD6918GDAW-XZ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IXZ	-	LD6918GDDW-XZ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IY1	-	LD6918GDAW-Y1	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IY1	-	LD6918GDDW-Y1	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IY2	-	LD6918GDAW-Y2	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IY2	-	LD6918GDDW-Y2	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IY3	-	LD6918GDAW-Y3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IY3	-	LD6918GDDW-Y3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IY4	-	LD6918GDAW-Y4	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IY4	-	LD6918GDDW-Y4	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYH	-	LD6918GDAW-YH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYH	-	LD6918GDDW-YH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYI	-	LD6918GDAW-YI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYI	-	LD6918GDDW-YI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYJ	-	LD6918GDAW-YJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYJ	-	LD6918GDDW-YJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYK	-	LD6918GDAW-YK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYK	-	LD6918GDDW-YK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYL	-	LD6918GDAW-YL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
IYL	-	LD6918GDDW-YL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYM	-	LD6918GDAW-YM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYM	-	LD6918GDDW-YM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYN	-	LD6918GDAW-YN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYN	-	LD6918GDDW-YN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYO	-	LD6918GDAW-YO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYO	-	LD6918GDDW-YO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYP	-	LD6918GDAW-YP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYP	-	LD6918GDDW-YP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYQ	-	LD6918GDAW-YQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYQ	-	LD6918GDDW-YQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYR	-	LD6918GDAW-YR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYR	-	LD6918GDDW-YR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYS	-	LD6918GDAW-YS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYS	-	LD6918GDDW-YS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYT	-	LD6918GDAW-YT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYT	-	LD6918GDDW-YT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYU	-	LD6918GDAW-YU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYU	-	LD6918GDDW-YU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYV	-	LD6918GDAW-YV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYV	-	LD6918GDDW-YV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYW	-	LD6918GDAW-YW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYW	-	LD6918GDDW-YW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYX	-	LD6918GDAW-YX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYX	-	LD6918GDDW-YX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYY	-	LD6918GDAW-YY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYY	-	LD6918GDDW-YY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IYZ	-	LD6918GDAW-YZ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IYZ	-	LD6918GDDW-YZ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.2V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZ1	-	LD6918GDAW-Z1	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZ1	-	LD6918GDDW-Z1	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZ2	-	LD6918GDAW-Z2	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.65V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZ2	-	LD6918GDDW-Z2	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.65V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZ3	-	LD6918GDAW-Z3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZ3	-	LD6918GDDW-Z3	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.85V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZ4	-	LD6918GDAW-Z4	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.15V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZ4	-	LD6918GDDW-Z4	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.15V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZH	-	LD6918GDAW-ZH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZH	-	LD6918GDDW-ZH	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZI	-	LD6918GDAW-ZI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZI	-	LD6918GDDW-ZI	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZJ	-	LD6918GDAW-ZJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZJ	-	LD6918GDDW-ZJ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZK	-	LD6918GDAW-ZK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZK	-	LD6918GDDW-ZK	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZL	-	LD6918GDAW-ZL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZL	-	LD6918GDDW-ZL	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZM	-	LD6918GDAW-ZM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZM	-	LD6918GDDW-ZM	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZN	-	LD6918GDAW-ZN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZN	-	LD6918GDDW-ZN	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZO	-	LD6918GDAW-ZO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZO	-	LD6918GDDW-ZO	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZP	-	LD6918GDAW-ZP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZP	-	LD6918GDDW-ZP	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZQ	-	LD6918GDAW-ZQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZQ	-	LD6918GDDW-ZQ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.4V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZR	-	LD6918GDAW-ZR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZR	-	LD6918GDDW-ZR	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.5V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZS	-	LD6918GDAW-ZS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZS	-	LD6918GDDW-ZS	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.6V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZT	-	LD6918GDAW-ZT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZT	-	LD6918GDDW-ZT	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.7V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZU	-	LD6918GDAW-ZU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZU	-	LD6918GDDW-ZU	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZV	-	LD6918GDAW-ZV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZV	-	LD6918GDDW-ZV	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.9V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZW	-	LD6918GDAW-ZW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZW	-	LD6918GDDW-ZW	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZX	-	LD6918GDAW-ZX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
IZX	-	LD6918GDDW-ZX	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.1V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZY	-	LD6918GDAW-ZY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZY	-	LD6918GDDW-ZY	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.2V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
IZZ	-	LD6918GDAW-ZZ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 300mA, +CE	WDFN-6L 1.6x1.6	74y6	VR19	9i	Ltr
IZZ	-	LD6918GDDW-ZZ	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 300mA, +CE	WDFN-8L 2x2	75yq	VR19	9i	Ltr
J	-	HMPS-2825	Si-diode	Dual, Schottky Barrier, RF, 15V±2%, 1A(1µs), <1pF	MP	93ct	-	9a	Agi
J0	-	R3118K361C	Vdet-IC	3.6V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
J0	-	RP109L181B5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
J001	-	RP151K001A	LVR/Vdet-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 300mA, +CE, Vdet	DFN2020-8	75	-	9b	Ric
J002	-	RP151K002A	LVR/Vdet-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 300mA, +CE, Vdet	DFN2020-8	75	-	9b	Ric
J005	-	RP151K005A	LVR/Vdet-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 300mA, +CE, Vdet	DFN2020-8	75	-	9b	Ric
J006	-	RP151K006A	LVR/Vdet-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 300mA, +CE, Vdet	DFN2020-8	75	-	9b	Ric
J1	-	R3118K371C	Vdet-IC	3.7V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
J1	-	RP109L281B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
J2	-	LM48411TL	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 2x2.5W(5V/4Ω), shutdown	BGA-16	39	-	9a	Nsc
J2	-	R3118K381C	Vdet-IC	3.8V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
J2	-	RP109L341B5	LVR-IC	LDO, 3.45V±1%, 150mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
J3	-	R3118K391C	Vdet-IC	3.9V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
J4	-	R3118K401C	Vdet-IC	4.0V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
J48	-	MIC5370-2.8/1.2YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.2V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
J5	-	R3118K411C	Vdet-IC	4.1V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
J6	-	R3118K421C	Vdet-IC	4.2V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
J7	-	R3118K431C	Vdet-IC	4.3V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
J8	-	R3118K441C	Vdet-IC	4.4V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
J9	-	R3118K451C	Vdet-IC	4.5V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
JA	-	GDZ7.5	Z-diode	7.06..7.84V, Izt=5.0mA, 100mW	GMD2	13d	-	2w	Rhm
JA	-	R3116K311A	Vdet-IC	3.1V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JA	-	RP107K101B	LVR-IC	LDO, 1.0V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JB	-	R3116K321A	Vdet-IC	3.2V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JB	-	RP107K111B	LVR-IC	LDO, 1.1V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JC	-	R3116K331A	Vdet-IC	3.3V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JC	-	RP107K121B	LVR-IC	LDO, 1.2V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JD	-	R3116K341A	Vdet-IC	3.4V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JD	-	RP107K131B	LVR-IC	LDO, 1.3V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JE	-	R3116K351A	Vdet-IC	3.5V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JE	-	RP107K141B	LVR-IC	LDO, 1.4V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JF	-	R3116K361A	Vdet-IC	3.6V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JF	-	RP107K151B	LVR-IC	LDO, 1.5V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JG	-	MIC2211-2.5/1.8BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(150mA)/1.8V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
JG	-	R3116K371A	Vdet-IC	3.7V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JG	-	RP107K161B	LVR-IC	LDO, 1.6V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JGZ	mb	MIC5310-2.5/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.8V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
JH	-	LD6805K/21H	LVR-IC	LDO, 2.1V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
JH	-	R3116K381A	Vdet-IC	3.8V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JH	-	RP107K171B	LVR-IC	LDO, 1.7V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JJ	-	R3116K391A	Vdet-IC	3.9V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JJ	-	RP107K181B	LVR-IC	LDO, 1.8V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JJZ	mb	MIC5310-2.5/2.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.5V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
JK	-	R3116K401A	Vdet-IC	4.0V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JK	-	RP107K191B	LVR-IC	LDO, 1.9V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JL	-	R3116K411A	Vdet-IC	4.1V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JL	-	RP107K201B	LVR-IC	LDO, 2.0V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JM	-	MIC2211-2.5/2.8BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(150mA)/2.8V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
JM	-	R3116K421A	Vdet-IC	4.2V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JM	-	RP107K211B	LVR-IC	LDO, 2.1V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JN	-	R3116K431A	Vdet-IC	4.3V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JN	-	RP107K221B	LVR-IC	LDO, 2.2V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JP	-	LD6805K/21P	LVR-IC	LDO, 2.1V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
JP	-	MIC2211-2.5/3.0BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(150mA)/3.0V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
JP	-	R3116K441A	Vdet-IC	4.4V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JP	-	RP107K231B	LVR-IC	LDO, 2.3V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JPG	-	MIC5335-2.5/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.8V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
JPJ	-	MIC5335-2.5/2.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.5V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
JQ	-	R3116K451A	Vdet-IC	4.5V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JQ	-	RP107K241B	LVR-IC	LDO, 2.4V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JR	-	R3116K461A	Vdet-IC	4.6V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JR	-	RP107K251B	LVR-IC	LDO, 2.5V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JS	-	MIC2211-2.5/3.3BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(150mA)/3.3V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
JS	-	R3116K471A	Vdet-IC	4.7V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JS	-	RP107K261B	LVR-IC	LDO, 2.6V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
JT	-	R3116K481A	Vdet-IC	4.8V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JT	-	RP107K271B	LVR-IC	LDO, 2.7V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JU	-	R3116K491A	Vdet-IC	4.9V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JU	-	RP107K281B	LVR-IC	LDO, 2.8V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JV	-	CH751M1CPT	Si-diode	Dual, SBD, 40V, 30mA, Vf<0.37V(1mA)	FBPT-723	17df	-	9c	Chm
JV	-	R3116K501A	Vdet-IC	5V±0.8%, -Reset ODO	DFN1010-4	48rj	VD1	9a	Ric
JV	-	RP107K291B	LVR-IC	LDO, 2.9V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JW	-	RP107K301B	LVR-IC	LDO, 3.0V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JX	-	RP107K311B	LVR-IC	LDO, 3.1V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JY	-	MIC2211-2.5/1.9BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V(150mA)/1.9V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
JY	-	RP107K321B	LVR-IC	LDO, 3.2V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
JZ	-	RP107K331B	LVR-IC	LDO, 3.3V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
k	-	BU30UA3WNVX	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
K	-	BBY52-02L	C-diode	VCO-tuning, 7V, 20mA, 1.4..2.2pF(4..1V)	TSLP-2-1	13d	-	2b	Inf
K	-	HMPS-2822	Si-diode	Dual, Schottky Barrier, RF, 15V±2%, 1A(1μs), <1pF	MP	93cs	-	9a	Agi
K0	-	R3118K461C	Vdet-IC	4.6V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
K0	-	RP109L181D5	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
K0	-	TS2012EIJT	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x2.5W(5V/4Ω), shutdown	BGA-16	39	AFP46	9a	Ste
K0	-	TS2012FC	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x2.5W(5V/4Ω), shutdown	BGA-16	39	AFP46	9a	Ste
K007	-	TS2007IQT	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 2x3W(5V/4Ω), shutdown	DFN-8	92	-	9a	Ste
K1	-	HD74LVC1G98CLE	CMOS-Log	Configurable multiple-function gate	WCSP-6	40	Log43	9d	Ren
K1	-	PZU3.0B2L	Z-diode	3.0V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
K1	-	R3118K471C	Vdet-IC	4.7V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
K1	-	RP109L281D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
K12	-	TS2012IQT	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x2.5W(5V/4Ω), shutdown	QFN-20	38	-	9a	Ste
K19A	-	TS419QT	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	DFN-8	92	-	9a	Ste
K19B	-	TS419-2QT	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	DFN-8	92	AFP59	9a	Ste
K19C	-	TS419-4QT	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	DFN-8	92	AFP59	9a	Ste
K19D	-	TS419-8QT	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	DFN-8	92	AFP59	9a	Ste
K1Y	-	RD74LVC1G98WPE	CMOS-Log	Configurable multiple-function gate	WCSP-6	40	Log43	9d	Ren
K2	-	HD74LVC1G97CLE	CMOS-Log	Configurable multiple-function gate	WCSP-6	40	Log41	9d	Ren
K2	-	PZU3.3B2L	Z-diode	3.3V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
K2	-	R3118K481C	Vdet-IC	4.8V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
K2	-	RP109L341D5	LVR-IC	LDO, 3.45V±1%, 150mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
K21	-	TS421QT	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	DFN-8	92	-	9a	Ste
K21A	-	TS421-2QT	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	DFN-8	92	-	9a	Ste
K21B	-	TS421-4QT	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	DFN-8	92	-	9a	Ste
K21C	-	TS421-8QT	Lin-IC	AF PA, BTL, 2..5.5V, 367mW(5V/16Ω), shutdown	DFN-8	92	-	9a	Ste
K2Y	-	RD74LVC1G97WPE	CMOS-Log	Configurable multiple-function gate	WCSP-6	40	Log41	9d	Ren
K3	-	LM48861TM	Lin-IC	AF PA, 1.2..2.8V, 2x26mW(2V/16Ω), I2C volume	BGA-12	39	-	9a	Nsc
K3	-	PZU3.6B2L	Z-diode	3.6V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
K3	-	R3118K491C	Vdet-IC	4.9V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
K4	-	PZU3.9B2L	Z-diode	3.9V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
K4	-	R3118K501C	Vdet-IC	5.0V±1.5%, -Reset PPO, Sense	DFN1212-6	52z3	VD15	9a	Ric
K5	-	74AVCH1T45GM	CMOS-Log	Dual supply translating transceiver with 3-state output	SOT886	57	Log70	9z	Nxp
K5	-	PZU4.3B2L	Z-diode	4.3V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
K6	-	PZU4.7B2L	Z-diode	4.7V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
K61T	-	TS4961TIQT	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 1.6W(5V/4Ω), shutdown	QFN-16	38	-	9q	Ste
K7	-	PZU5.1B2L	Z-diode	5.1V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
K7	-	TS2007EKIJT	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 3W(5V/4Ω), shutdown	BGA-9	39	AFP52	9a	Ste
K7	-	TS2007FC	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 3W(5V/4Ω), shutdown	BGA-9	39	AFP52	9a	Ste
K8	-	PZU5.6B2L	Z-diode	5.6V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
K8	-	XC6GN0802HR	Vdet-IC	0.8V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
K83	-	XC61GN0802HR	Vdet-IC	0.8V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
K86A	-	TS486-IQT	Lin-IC	AF PA, 2..5.5V, 2x100mW(16Ω), shutdown	DFN-8	92	AFP7	9a	Ste
K86B	-	TS486-1IQT	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω), shutdown	DFN-8	92	AFP25	9a	Ste
K86C	-	TS486-2IQT	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω), shutdown	DFN-8	92	AFP25	9a	Ste
K86D	-	TS486-4IQT	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω), shutdown	DFN-8	92	AFP25	9a	Ste
K87A	-	TS487-IQT	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω), shutdown	DFN-8	92	AFP16	9a	Ste
K87B	-	TS487-1IQT	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω), shutdown	DFN-8	92	AFP64	9a	Ste
K87C	-	TS487-2IQT	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω), shutdown	DFN-8	92	AFP64	9a	Ste
K87D	-	TS487-4IQT	Lin-IC	AF PA, 2..5.5V, 2x100mW(5V/16Ω), shutdown	DFN-8	92	AFP64	9a	Ste
K88	-	TS488IQT	Lin-IC	AF PA, 2.5..5.5V, 2x120mW(16Ω), shutdown	DFN-8	92	-	9a	Ste
K89	-	TS489IQT	Lin-IC	AF PA, 2.5..5.5V, 2x120mW(16Ω), shutdown	DFN-8	92	-	9a	Ste
K8A	-	XC6108N08AGR	Vdet-IC	0.8V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
K8B	-	XC6108N08BGR	Vdet-IC	0.8V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
K8C	-	XC6108N08CGR	Vdet-IC	0.8V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
K8D	-	XC6108N08DGR	Vdet-IC	0.8V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
K9	-	PZU6.8B2L	Z-diode	6.8V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
K9	-	TS4999EIJT	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x1W(5V/8Ω), shutdown	BGA-18	39	-	9p	Ste

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
K9	-	XC6GN0902HR	Vdet-IC	0.9V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
K909	-	TS4909IQT	Lin-IC	AF PA, 2.5..5.5V, 2x120mW(16Ω), shutdown	DFN-10	37	-	9a	Ste
K93	-	XC61GN0902HR	Vdet-IC	0.9V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
K962	-	TS4962IQT	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 2.4W(5V/4Ω), shutdown	DFN-8	92	AFP24	9a	Ste
K982	-	TS4982IQT	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x2W(4Ω)+2x125mW(16Ω), shutdown	QFN-32	38	-	9a	Ste
K984	-	TS4984IQT	Lin-IC	AF PA, BTL, 2.5..5.5V, 2x1W(5V/8Ω), shutdown	QFN-16	38	-	9a	Ste
K990	-	TS4990IQT	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), shutdown	DFN-8	92	AFP12	9a	Ste
K994	-	TS4994IQT	Lin-IC	AF PA, BTL, 2.5..5.5V, 1.2W(5V/8Ω), select shutdown	DFN-10	37	AFP19	9a	Ste
K9A	-	XC6108N09AGR	Vdet-IC	0.9V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
K9B	-	XC6108N09BGR	Vdet-IC	0.9V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
K9C	-	XC6108N09CGR	Vdet-IC	0.9V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
K9D	-	XC6108N09DGR	Vdet-IC	0.9V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
KA	-	GDZ8.2	Z-diode	7.76..8.64V, Izt=5.0mA, 100mW	GMD2	13d	-	2w	Rhm
KA	-	PZU7.5B2L	Z-diode	7.5V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
KA	-	R3116K071C	Vdet-IC	0.7V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KA	-	RP107K341B	LVR-IC	LDO, 3.4V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
KA216	-	XC6122A216ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA217	-	XC6122A217ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA218	-	XC6122A218ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA219	-	XC6122A219ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA220	-	XC6122A220ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA221	-	XC6122A221ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA222	-	XC6122A222ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA223	-	XC6122A223ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA224	-	XC6122A224ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA225	-	XC6122A225ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA226	-	XC6122A226ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA227	-	XC6122A227ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA228	-	XC6122A228ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA229	-	XC6122A229ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA230	-	XC6122A230ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA231	-	XC6122A231ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA232	-	XC6122A232ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA233	-	XC6122A233ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA234	-	XC6122A234ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA235	-	XC6122A235ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA236	-	XC6122A236ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA237	-	XC6122A237ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA238	-	XC6122A238ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA239	-	XC6122A239ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA240	-	XC6122A240ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA241	-	XC6122A241ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA242	-	XC6122A242ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA243	-	XC6122A243ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA244	-	XC6122A244ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA245	-	XC6122A245ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA246	-	XC6122A246ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA247	-	XC6122A247ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA248	-	XC6122A248ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA249	-	XC6122A249ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA250	-	XC6122A250ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA316	-	XC6122A316ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA317	-	XC6122A317ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA318	-	XC6122A318ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA319	-	XC6122A319ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA320	-	XC6122A320ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA321	-	XC6122A321ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA322	-	XC6122A322ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA323	-	XC6122A323ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA324	-	XC6122A324ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA325	-	XC6122A325ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA326	-	XC6122A326ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA327	-	XC6122A327ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA328	-	XC6122A328ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA329	-	XC6122A329ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA330	-	XC6122A330ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA331	-	XC6122A331ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA332	-	XC6122A332ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA333	-	XC6122A333ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA334	-	XC6122A334ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KA335	-	XC6122A335ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA336	-	XC6122A336ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA337	-	XC6122A337ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA338	-	XC6122A338ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA339	-	XC6122A339ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA340	-	XC6122A340ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA341	-	XC6122A341ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA342	-	XC6122A342ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA343	-	XC6122A343ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA344	-	XC6122A344ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA345	-	XC6122A345ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA346	-	XC6122A346ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA347	-	XC6122A347ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA348	-	XC6122A348ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA349	-	XC6122A349ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA350	-	XC6122A350ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA416	-	XC6122A416ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA417	-	XC6122A417ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA418	-	XC6122A418ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA419	-	XC6122A419ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA420	-	XC6122A420ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA421	-	XC6122A421ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA422	-	XC6122A422ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA423	-	XC6122A423ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA424	-	XC6122A424ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA425	-	XC6122A425ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA426	-	XC6122A426ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA427	-	XC6122A427ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA428	-	XC6122A428ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA429	-	XC6122A429ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA430	-	XC6122A430ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA431	-	XC6122A431ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA432	-	XC6122A432ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA433	-	XC6122A433ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA434	-	XC6122A434ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA435	-	XC6122A435ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA436	-	XC6122A436ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA437	-	XC6122A437ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA438	-	XC6122A438ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA439	-	XC6122A439ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA440	-	XC6122A440ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA441	-	XC6122A441ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA442	-	XC6122A442ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA443	-	XC6122A443ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA444	-	XC6122A444ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA445	-	XC6122A445ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA446	-	XC6122A446ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA447	-	XC6122A447ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA448	-	XC6122A448ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA449	-	XC6122A449ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA450	-	XC6122A450ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA516	-	XC6122A516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA517	-	XC6122A517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA518	-	XC6122A518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA519	-	XC6122A519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA520	-	XC6122A520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA521	-	XC6122A521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA522	-	XC6122A522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA523	-	XC6122A523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA524	-	XC6122A524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA525	-	XC6122A525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA526	-	XC6122A526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA527	-	XC6122A527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA528	-	XC6122A528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA529	-	XC6122A529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA530	-	XC6122A530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA531	-	XC6122A531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA532	-	XC6122A532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA533	-	XC6122A533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA534	-	XC6122A534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KA535	-	XC6122A535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA536	-	XC6122A536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA537	-	XC6122A537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA538	-	XC6122A538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA539	-	XC6122A539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA540	-	XC6122A540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA541	-	XC6122A541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA542	-	XC6122A542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA543	-	XC6122A543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA544	-	XC6122A544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA545	-	XC6122A545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA546	-	XC6122A546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA547	-	XC6122A547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA548	-	XC6122A548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA549	-	XC6122A549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA550	-	XC6122A550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA616	-	XC6122A616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA617	-	XC6122A617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA618	-	XC6122A618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA619	-	XC6122A619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA620	-	XC6122A620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA621	-	XC6122A621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA622	-	XC6122A622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA623	-	XC6122A623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA624	-	XC6122A624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA625	-	XC6122A625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA626	-	XC6122A626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA627	-	XC6122A627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA628	-	XC6122A628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA629	-	XC6122A629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA630	-	XC6122A630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA631	-	XC6122A631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA632	-	XC6122A632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA633	-	XC6122A633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA634	-	XC6122A634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA635	-	XC6122A635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA636	-	XC6122A636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA637	-	XC6122A637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA638	-	XC6122A638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA639	-	XC6122A639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA640	-	XC6122A640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA641	-	XC6122A641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA642	-	XC6122A642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA643	-	XC6122A643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA644	-	XC6122A644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA645	-	XC6122A645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA646	-	XC6122A646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA647	-	XC6122A647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA648	-	XC6122A648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA649	-	XC6122A649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA650	-	XC6122A650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA716	-	XC6122A716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA717	-	XC6122A717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA718	-	XC6122A718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA719	-	XC6122A719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA720	-	XC6122A720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA721	-	XC6122A721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA722	-	XC6122A722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA723	-	XC6122A723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA724	-	XC6122A724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA725	-	XC6122A725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA726	-	XC6122A726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA727	-	XC6122A727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA728	-	XC6122A728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA729	-	XC6122A729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA730	-	XC6122A730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA731	-	XC6122A731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA732	-	XC6122A732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA733	-	XC6122A733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA734	-	XC6122A734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KA735	-	XC6122A735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA736	-	XC6122A736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA737	-	XC6122A737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA738	-	XC6122A738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA739	-	XC6122A739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA740	-	XC6122A740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA741	-	XC6122A741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA742	-	XC6122A742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA743	-	XC6122A743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA744	-	XC6122A744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA745	-	XC6122A745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA746	-	XC6122A746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA747	-	XC6122A747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA748	-	XC6122A748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA749	-	XC6122A749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA750	-	XC6122A750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
KA8	-	XC9235C08C0R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KA8	-	XC9235C08C4R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KA8	-	XC9235C08CER-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KA9	-	XC9235C09C0R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KA9	-	XC9235C09C4R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KA9	-	XC9235C09CER-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KAL	-	XC9235C0LC0R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KAL	-	XC9235C0LC4R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KAL	-	XC9235C0LCER-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KAM	-	XC9235C0MC0R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KAM	-	XC9235C0MC4R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KAM	-	XC9235C0MCER-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KB	-	PZU8.2B2L	Z-diode	8.2V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
KB	-	R3116K081C	Vdet-IC	0.8V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KB	-	RP107K351B	LVR-IC	LDO, 3.5V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
KB0	-	XC9235C10C0R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KB0	-	XC9235C10C4R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KB0	-	XC9235C10CER-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KB02A	-	XC9133B02AER	LDR-IC	PWM step-up, Adj. 2.5...17.5V/LED backlight driver	USP-6C	49dc6	LD3	9b	Tor
KB1	-	XC9235C11C0R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KB1	-	XC9235C11C4R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KB1	-	XC9235C11CER-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KB2	-	XC9235C12C0R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KB2	-	XC9235C12C4R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KB2	-	XC9235C12CER-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KB3	-	XC9235C13C0R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KB3	-	XC9235C13C4R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KB3	-	XC9235C13CER-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KB4	-	XC9235C14C0R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KB4	-	XC9235C14C4R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KB4	-	XC9235C14CER-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KB5	-	XC9235C15C0R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KB5	-	XC9235C15C4R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KB5	-	XC9235C15CER-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KB6	-	XC9235C16C0R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KB6	-	XC9235C16C4R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KB6	-	XC9235C16CER-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KB7	-	XC9235C17C0R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KB7	-	XC9235C17C4R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KB7	-	XC9235C17CER-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KB8	-	XC9235C18C0R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KB8	-	XC9235C18C4R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KB8	-	XC9235C18CER-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KB9	-	XC9235C19C0R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KB9	-	XC9235C19C4R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KB9	-	XC9235C19CER-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KBA	-	XC9235C1AC0R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KBA	-	XC9235C1AC4R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KBA	-	XC9235C1ACER-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KBB	-	XC9235C1BC0R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KBB	-	XC9235C1BC4R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KBB	-	XC9235C1BCER-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KBC	-	XC9235C1CC0R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KBC	-	XC9235C1CC4R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KBC	-	XC9235C1CCER-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KBD	-	XC9235C1DC0R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KBD	-	XC9235C1DC4R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KBD	-	XC9235C1DCER-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KBE	-	XC9235C1EC0R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KBE	-	XC9235C1EC4R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KBE	-	XC9235C1ECER-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KBF	-	XC9235C1FC0R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KBF	-	XC9235C1FC4R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KBF	-	XC9235C1FCER-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KBH	-	XC9235C1HC0R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KBH	-	XC9235C1HC4R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KBH	-	XC9235C1HCER-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KBK	-	XC9235C1KC0R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KBK	-	XC9235C1KC4R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KBK	-	XC9235C1KCER-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KBL	-	XC9235C1LC0R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KBL	-	XC9235C1LC4R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KBL	-	XC9235C1LCER-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KBM	-	XC9235C1MC0R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KBM	-	XC9235C1MC4R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KBM	-	XC9235C1MCER-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KC	-	PZU9.1B2L	Z-diode	9.1V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
KC	-	R3116K091C	Vdet-IC	0.9V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KC	-	RP107K361B	LVR-IC	LDO, 3.6V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
KC0	-	XC9235C20C0R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KC0	-	XC9235C20C4R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KC0	-	XC9235C20CER-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KC1	-	XC9235C21C0R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KC1	-	XC9235C21C4R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KC1	-	XC9235C21CER-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KC2	-	XC9235C22C0R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KC2	-	XC9235C22C4R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KC2	-	XC9235C22CER-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KC216	-	XC6122C216ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC217	-	XC6122C217ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC218	-	XC6122C218ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC219	-	XC6122C219ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC220	-	XC6122C220ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC221	-	XC6122C221ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC222	-	XC6122C222ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC223	-	XC6122C223ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC224	-	XC6122C224ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC225	-	XC6122C225ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC226	-	XC6122C226ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC227	-	XC6122C227ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC228	-	XC6122C228ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC229	-	XC6122C229ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC230	-	XC6122C230ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC231	-	XC6122C231ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC232	-	XC6122C232ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC233	-	XC6122C233ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC234	-	XC6122C234ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC235	-	XC6122C235ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC236	-	XC6122C236ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC237	-	XC6122C237ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC238	-	XC6122C238ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC239	-	XC6122C239ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC240	-	XC6122C240ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC241	-	XC6122C241ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC242	-	XC6122C242ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC243	-	XC6122C243ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC244	-	XC6122C244ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC245	-	XC6122C245ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC246	-	XC6122C246ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC247	-	XC6122C247ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC248	-	XC6122C248ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC249	-	XC6122C249ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC250	-	XC6122C250ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC3	-	XC9235C23C0R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KC3	-	XC9235C23C4R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KC3	-	XC9235C23CER-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KC316	-	XC6122C316ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC317	-	XC6122C317ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC318	-	XC6122C318ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC319	-	XC6122C319ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC320	-	XC6122C320ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC321	-	XC6122C321ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC322	-	XC6122C322ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC323	-	XC6122C323ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC324	-	XC6122C324ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC325	-	XC6122C325ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC326	-	XC6122C326ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC327	-	XC6122C327ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC328	-	XC6122C328ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC329	-	XC6122C329ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC330	-	XC6122C330ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC331	-	XC6122C331ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC332	-	XC6122C332ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC333	-	XC6122C333ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC334	-	XC6122C334ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC335	-	XC6122C335ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC336	-	XC6122C336ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC337	-	XC6122C337ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC338	-	XC6122C338ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC339	-	XC6122C339ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC340	-	XC6122C340ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC341	-	XC6122C341ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC342	-	XC6122C342ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC343	-	XC6122C343ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC344	-	XC6122C344ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC345	-	XC6122C345ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC346	-	XC6122C346ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC347	-	XC6122C347ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC348	-	XC6122C348ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC349	-	XC6122C349ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC350	-	XC6122C350ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC4	-	XC9235C24C0R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KC4	-	XC9235C24C4R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KC4	-	XC9235C24CER-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KC416	-	XC6122C416ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC417	-	XC6122C417ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC418	-	XC6122C418ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC419	-	XC6122C419ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC420	-	XC6122C420ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC421	-	XC6122C421ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC422	-	XC6122C422ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC423	-	XC6122C423ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC424	-	XC6122C424ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC425	-	XC6122C425ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC426	-	XC6122C426ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC427	-	XC6122C427ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC428	-	XC6122C428ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC429	-	XC6122C429ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC430	-	XC6122C430ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC431	-	XC6122C431ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC432	-	XC6122C432ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC433	-	XC6122C433ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC434	-	XC6122C434ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC435	-	XC6122C435ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC436	-	XC6122C436ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC437	-	XC6122C437ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC438	-	XC6122C438ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC439	-	XC6122C439ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC440	-	XC6122C440ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC441	-	XC6122C441ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC442	-	XC6122C442ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC443	-	XC6122C443ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC444	-	XC6122C444ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC445	-	XC6122C445ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KC446	-	XC6122C446ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC447	-	XC6122C447ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC448	-	XC6122C448ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC449	-	XC6122C449ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC450	-	XC6122C450ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC5	-	XC9235C25C0R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KC5	-	XC9235C25C4R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KC5	-	XC9235C25CER-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KC516	-	XC6122C516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC517	-	XC6122C517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC518	-	XC6122C518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC519	-	XC6122C519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC520	-	XC6122C520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC521	-	XC6122C521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC522	-	XC6122C522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC523	-	XC6122C523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC524	-	XC6122C524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC525	-	XC6122C525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC526	-	XC6122C526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC527	-	XC6122C527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC528	-	XC6122C528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC529	-	XC6122C529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC530	-	XC6122C530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC531	-	XC6122C531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC532	-	XC6122C532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC533	-	XC6122C533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC534	-	XC6122C534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC535	-	XC6122C535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC536	-	XC6122C536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC537	-	XC6122C537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC538	-	XC6122C538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC539	-	XC6122C539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC540	-	XC6122C540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC541	-	XC6122C541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC542	-	XC6122C542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC543	-	XC6122C543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC544	-	XC6122C544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC545	-	XC6122C545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC546	-	XC6122C546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC547	-	XC6122C547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC548	-	XC6122C548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC549	-	XC6122C549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC550	-	XC6122C550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC6	-	XC9235C26C0R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KC6	-	XC9235C26C4R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KC6	-	XC9235C26CER-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KC616	-	XC6122C616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC617	-	XC6122C617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC618	-	XC6122C618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC619	-	XC6122C619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC620	-	XC6122C620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC621	-	XC6122C621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC622	-	XC6122C622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC623	-	XC6122C623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC624	-	XC6122C624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC625	-	XC6122C625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC626	-	XC6122C626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC627	-	XC6122C627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC628	-	XC6122C628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC629	-	XC6122C629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC630	-	XC6122C630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC631	-	XC6122C631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC632	-	XC6122C632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC633	-	XC6122C633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC634	-	XC6122C634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC635	-	XC6122C635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC636	-	XC6122C636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC637	-	XC6122C637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC638	-	XC6122C638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC639	-	XC6122C639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KC640	-	XC6122C640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC641	-	XC6122C641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC642	-	XC6122C642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC643	-	XC6122C643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC644	-	XC6122C644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC645	-	XC6122C645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC646	-	XC6122C646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC647	-	XC6122C647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC648	-	XC6122C648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC649	-	XC6122C649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC650	-	XC6122C650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC7	-	XC9235C27C0R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KC7	-	XC9235C27C4R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KC7	-	XC9235C27CER-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KC716	-	XC6122C716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC717	-	XC6122C717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC718	-	XC6122C718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC719	-	XC6122C719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC720	-	XC6122C720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC721	-	XC6122C721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC722	-	XC6122C722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC723	-	XC6122C723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC724	-	XC6122C724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC725	-	XC6122C725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC726	-	XC6122C726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC727	-	XC6122C727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC728	-	XC6122C728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC729	-	XC6122C729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC730	-	XC6122C730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC731	-	XC6122C731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC732	-	XC6122C732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC733	-	XC6122C733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC734	-	XC6122C734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC735	-	XC6122C735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC736	-	XC6122C736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC737	-	XC6122C737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC738	-	XC6122C738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC739	-	XC6122C739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC740	-	XC6122C740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC741	-	XC6122C741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC742	-	XC6122C742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC743	-	XC6122C743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC744	-	XC6122C744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC745	-	XC6122C745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC746	-	XC6122C746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC747	-	XC6122C747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC748	-	XC6122C748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC749	-	XC6122C749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC750	-	XC6122C750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
KC8	-	XC9235C28C0R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KC8	-	XC9235C28C4R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KC8	-	XC9235C28CER-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KC9	-	XC9235C29C0R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KC9	-	XC9235C29C4R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KC9	-	XC9235C29CER-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KCA	-	XC9235C2AC0R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KCA	-	XC9235C2AC4R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KCA	-	XC9235C2ACER-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KCB	-	XC9235C2BC0R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KCB	-	XC9235C2BC4R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KCB	-	XC9235C2BCER-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KCC	-	XC9235C2CC0R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KCC	-	XC9235C2CC4R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KCC	-	XC9235C2CCER-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KCD	-	XC9235C2DC0R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KCD	-	XC9235C2DC4R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KCD	-	XC9235C2DCER-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KCE	-	XC9235C2EC0R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KCE	-	XC9235C2EC4R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KCE	-	XC9235C2ECER-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KCF	-	XC9235C2FC0R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KCF	-	XC9235C2FC4R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KCF	-	XC9235C2FCER-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KCH	-	XC9235C2HC0R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KCH	-	XC9235C2HC4R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KCH	-	XC9235C2HCER-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KCK	-	XC9235C2KC0R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KCK	-	XC9235C2KC4R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KCK	-	XC9235C2KCER-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KCL	-	XC9235C2LC0R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KCL	-	XC9235C2LC4R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KCL	-	XC9235C2LCER-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KCM	-	XC9235C2MC0R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KCM	-	XC9235C2MC4R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KCM	-	XC9235C2MCER-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KD	-	MIC2211-2.6/2.85BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(150mA)/1.85V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
KD	-	PZU10B2L	Z-diode	10V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
KD	-	R3116K101C	Vdet-IC	1.0V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KD	-	RP107K371B	LVR-IC	LDO, 3.7V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
KD0	-	XC9235C30C0R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KD0	-	XC9235C30C4R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KD0	-	XC9235C30CER-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KD1	-	XC9235C31C0R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KD1	-	XC9235C31C4R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KD1	-	XC9235C31CER-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KD2	-	XC9235C32C0R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KD2	-	XC9235C32C4R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KD2	-	XC9235C32CER-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KD3	-	XC9235C33C0R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KD3	-	XC9235C33C4R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KD3	-	XC9235C33CER-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KD316	-	XC6122D316ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD317	-	XC6122D317ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD318	-	XC6122D318ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD319	-	XC6122D319ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD320	-	XC6122D320ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD321	-	XC6122D321ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD322	-	XC6122D322ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD323	-	XC6122D323ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD324	-	XC6122D324ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD325	-	XC6122D325ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD326	-	XC6122D326ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD327	-	XC6122D327ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD328	-	XC6122D328ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD329	-	XC6122D329ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD330	-	XC6122D330ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD331	-	XC6122D331ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD332	-	XC6122D332ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD333	-	XC6122D333ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD334	-	XC6122D334ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD335	-	XC6122D335ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD336	-	XC6122D336ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD337	-	XC6122D337ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD338	-	XC6122D338ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD339	-	XC6122D339ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD340	-	XC6122D340ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD341	-	XC6122D341ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD342	-	XC6122D342ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD343	-	XC6122D343ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD344	-	XC6122D344ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD345	-	XC6122D345ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD346	-	XC6122D346ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD347	-	XC6122D347ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD348	-	XC6122D348ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD349	-	XC6122D349ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD350	-	XC6122D350ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD4	-	XC9235C34C0R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KD4	-	XC9235C34C4R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KD4	-	XC9235C34CER-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KD416	-	XC6122D416ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KD417	-	XC6122D417ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD418	-	XC6122D418ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD419	-	XC6122D419ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD420	-	XC6122D420ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD421	-	XC6122D421ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD422	-	XC6122D422ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD423	-	XC6122D423ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD424	-	XC6122D424ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD425	-	XC6122D425ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD426	-	XC6122D426ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD427	-	XC6122D427ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD428	-	XC6122D428ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD429	-	XC6122D429ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD430	-	XC6122D430ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD431	-	XC6122D431ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD432	-	XC6122D432ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD433	-	XC6122D433ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD434	-	XC6122D434ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD435	-	XC6122D435ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD436	-	XC6122D436ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD437	-	XC6122D437ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD438	-	XC6122D438ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD439	-	XC6122D439ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD440	-	XC6122D440ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD441	-	XC6122D441ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD442	-	XC6122D442ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD443	-	XC6122D443ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD444	-	XC6122D444ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD445	-	XC6122D445ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD446	-	XC6122D446ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD447	-	XC6122D447ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD448	-	XC6122D448ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD449	-	XC6122D449ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD450	-	XC6122D450ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD5	-	XC9235C35C0R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KD5	-	XC9235C35C4R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KD5	-	XC9235C35CER-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KD516	-	XC6122D516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD517	-	XC6122D517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD518	-	XC6122D518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD519	-	XC6122D519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD520	-	XC6122D520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD521	-	XC6122D521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD522	-	XC6122D522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD523	-	XC6122D523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD524	-	XC6122D524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD525	-	XC6122D525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD526	-	XC6122D526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD527	-	XC6122D527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD528	-	XC6122D528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD529	-	XC6122D529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD530	-	XC6122D530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD531	-	XC6122D531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD532	-	XC6122D532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD533	-	XC6122D533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD534	-	XC6122D534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD535	-	XC6122D535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD536	-	XC6122D536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD537	-	XC6122D537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD538	-	XC6122D538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD539	-	XC6122D539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD540	-	XC6122D540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD541	-	XC6122D541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD542	-	XC6122D542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD543	-	XC6122D543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD544	-	XC6122D544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD545	-	XC6122D545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD546	-	XC6122D546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD547	-	XC6122D547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD548	-	XC6122D548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KD549	-	XC6122D549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD550	-	XC6122D550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD6	-	XC9235C36C0R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KD6	-	XC9235C36C4R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KD6	-	XC9235C36CER-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KD616	-	XC6122D616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD617	-	XC6122D617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD618	-	XC6122D618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD619	-	XC6122D619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD620	-	XC6122D620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD621	-	XC6122D621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD622	-	XC6122D622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD623	-	XC6122D623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD624	-	XC6122D624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD625	-	XC6122D625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD626	-	XC6122D626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD627	-	XC6122D627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD628	-	XC6122D628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD629	-	XC6122D629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD630	-	XC6122D630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD631	-	XC6122D631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD632	-	XC6122D632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD633	-	XC6122D633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD634	-	XC6122D634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD635	-	XC6122D635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD636	-	XC6122D636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD637	-	XC6122D637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD638	-	XC6122D638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD639	-	XC6122D639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD640	-	XC6122D640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD641	-	XC6122D641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD642	-	XC6122D642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD643	-	XC6122D643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD644	-	XC6122D644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD645	-	XC6122D645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD646	-	XC6122D646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD647	-	XC6122D647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD648	-	XC6122D648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD649	-	XC6122D649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD650	-	XC6122D650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD7	-	XC9235C37C0R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KD7	-	XC9235C37C4R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KD7	-	XC9235C37CER-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KD716	-	XC6122D716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD717	-	XC6122D717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD718	-	XC6122D718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD719	-	XC6122D719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD720	-	XC6122D720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD721	-	XC6122D721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD722	-	XC6122D722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD723	-	XC6122D723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD724	-	XC6122D724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD725	-	XC6122D725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD726	-	XC6122D726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD727	-	XC6122D727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD728	-	XC6122D728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD729	-	XC6122D729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD730	-	XC6122D730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD731	-	XC6122D731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD732	-	XC6122D732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD733	-	XC6122D733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD734	-	XC6122D734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD735	-	XC6122D735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD736	-	XC6122D736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD737	-	XC6122D737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD738	-	XC6122D738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD739	-	XC6122D739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD740	-	XC6122D740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD741	-	XC6122D741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD742	-	XC6122D742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KD743	-	XC6122D743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD744	-	XC6122D744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD745	-	XC6122D745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD746	-	XC6122D746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD747	-	XC6122D747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD748	-	XC6122D748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD749	-	XC6122D749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD750	-	XC6122D750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
KD8	-	XC9235C38C0R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KD8	-	XC9235C38C4R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KD8	-	XC9235C38CER-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KD9	-	XC9235C39C0R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KD9	-	XC9235C39C4R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KD9	-	XC9235C39CER-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KDA	-	XC9235C3AC0R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KDA	-	XC9235C3AC4R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KDA	-	XC9235C3ACER-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KDB	-	XC9235C3BC0R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KDB	-	XC9235C3BC4R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KDB	-	XC9235C3BCER-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KDC	-	XC9235C3CC0R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KDC	-	XC9235C3CC4R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KDC	-	XC9235C3CCER-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KDD	-	XC9235C3DC0R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KDD	-	XC9235C3DC4R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KDD	-	XC9235C3DCER-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KDE	-	XC9235C3EC0R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KDE	-	XC9235C3EC4R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KDE	-	XC9235C3ECER-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KDF	-	XC9235C3FC0R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KDF	-	XC9235C3FC4R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KDF	-	XC9235C3FCER-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KDH	-	XC9235C3HC0R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KDH	-	XC9235C3HC4R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KDH	-	XC9235C3HCER-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KDK	-	XC9235C3KC0R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KDK	-	XC9235C3KC4R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KDK	-	XC9235C3KCER-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KDL	-	XC9235C3LC0R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KDL	-	XC9235C3LC4R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KDL	-	XC9235C3LCER-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KDM	-	XC9235C3MC0R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KDM	-	XC9235C3MC4R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KDM	-	XC9235C3MCER-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KDZ	mb	MIC5310-2.6/1.85YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/1.85±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
KE	-	PZU11B2L	Z-diode	11V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
KE	-	R3116K111C	Vdet-IC	1.1V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KE	-	RD74LVC2G07WPE	CMOS-Log	Triple noninverting buffers/drivers (ODO)	WCSP-8	50	Log73	9d	Ren
KE	-	RP107K381B	LVR-IC	LDO, 3.8V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
KE0	-	XC9235C40C0R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KE0	-	XC9235C40C4R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KE0	-	XC9235C40CER-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KE416	-	XC6122E416ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE417	-	XC6122E417ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE418	-	XC6122E418ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE419	-	XC6122E419ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE420	-	XC6122E420ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE421	-	XC6122E421ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE422	-	XC6122E422ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE423	-	XC6122E423ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE424	-	XC6122E424ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE425	-	XC6122E425ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE426	-	XC6122E426ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE427	-	XC6122E427ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE428	-	XC6122E428ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE429	-	XC6122E429ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE430	-	XC6122E430ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE431	-	XC6122E431ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE432	-	XC6122E432ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE433	-	XC6122E433ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KE434	-	XC6122E434ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE435	-	XC6122E435ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE436	-	XC6122E436ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE437	-	XC6122E437ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE438	-	XC6122E438ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE439	-	XC6122E439ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE440	-	XC6122E440ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE441	-	XC6122E441ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE442	-	XC6122E442ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE443	-	XC6122E443ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE444	-	XC6122E444ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE445	-	XC6122E445ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE446	-	XC6122E446ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE447	-	XC6122E447ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE448	-	XC6122E448ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE449	-	XC6122E449ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE450	-	XC6122E450ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE516	-	XC6122E516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE517	-	XC6122E517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE518	-	XC6122E518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE519	-	XC6122E519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE520	-	XC6122E520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE521	-	XC6122E521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE522	-	XC6122E522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE523	-	XC6122E523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE524	-	XC6122E524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE525	-	XC6122E525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE526	-	XC6122E526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE527	-	XC6122E527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE528	-	XC6122E528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE529	-	XC6122E529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE530	-	XC6122E530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE531	-	XC6122E531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE532	-	XC6122E532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE533	-	XC6122E533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE534	-	XC6122E534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE535	-	XC6122E535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE536	-	XC6122E536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE537	-	XC6122E537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE538	-	XC6122E538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE539	-	XC6122E539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE540	-	XC6122E540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE541	-	XC6122E541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE542	-	XC6122E542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE543	-	XC6122E543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE544	-	XC6122E544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE545	-	XC6122E545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE546	-	XC6122E546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE547	-	XC6122E547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE548	-	XC6122E548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE549	-	XC6122E549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE550	-	XC6122E550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE616	-	XC6122E616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE617	-	XC6122E617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE618	-	XC6122E618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE619	-	XC6122E619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE620	-	XC6122E620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE621	-	XC6122E621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE622	-	XC6122E622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE623	-	XC6122E623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE624	-	XC6122E624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE625	-	XC6122E625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE626	-	XC6122E626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE627	-	XC6122E627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE628	-	XC6122E628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE629	-	XC6122E629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE630	-	XC6122E630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE631	-	XC6122E631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE632	-	XC6122E632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE633	-	XC6122E633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KE634	-	XC6122E634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE635	-	XC6122E635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE636	-	XC6122E636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE637	-	XC6122E637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE638	-	XC6122E638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE639	-	XC6122E639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE640	-	XC6122E640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE641	-	XC6122E641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE642	-	XC6122E642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE643	-	XC6122E643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE644	-	XC6122E644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE645	-	XC6122E645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE646	-	XC6122E646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE647	-	XC6122E647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE648	-	XC6122E648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE649	-	XC6122E649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE650	-	XC6122E650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE716	-	XC6122E716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE717	-	XC6122E717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE718	-	XC6122E718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE719	-	XC6122E719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE720	-	XC6122E720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE721	-	XC6122E721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE722	-	XC6122E722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE723	-	XC6122E723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE724	-	XC6122E724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE725	-	XC6122E725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE726	-	XC6122E726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE727	-	XC6122E727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE728	-	XC6122E728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE729	-	XC6122E729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE730	-	XC6122E730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE731	-	XC6122E731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE732	-	XC6122E732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE733	-	XC6122E733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE734	-	XC6122E734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE735	-	XC6122E735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE736	-	XC6122E736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE737	-	XC6122E737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE738	-	XC6122E738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE739	-	XC6122E739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE740	-	XC6122E740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE741	-	XC6122E741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE742	-	XC6122E742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE743	-	XC6122E743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE744	-	XC6122E744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE745	-	XC6122E745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE746	-	XC6122E746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE747	-	XC6122E747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE748	-	XC6122E748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE749	-	XC6122E749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KE750	-	XC6122E750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
KF	-	PZU12B2L	Z-diode	12V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
KF	-	R3116K121C	Vdet-IC	1.2V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KF	-	RP107K391B	LVR-IC	LDO, 3.9V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
KF516	-	XC6122F516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF517	-	XC6122F517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF518	-	XC6122F518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF519	-	XC6122F519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF520	-	XC6122F520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF521	-	XC6122F521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF522	-	XC6122F522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF523	-	XC6122F523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF524	-	XC6122F524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF525	-	XC6122F525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF526	-	XC6122F526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF527	-	XC6122F527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF528	-	XC6122F528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF529	-	XC6122F529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF530	-	XC6122F530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KF531	-	XC6122F531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF532	-	XC6122F532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF533	-	XC6122F533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF534	-	XC6122F534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF535	-	XC6122F535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF536	-	XC6122F536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF537	-	XC6122F537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF538	-	XC6122F538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF539	-	XC6122F539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF540	-	XC6122F540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF541	-	XC6122F541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF542	-	XC6122F542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF543	-	XC6122F543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF544	-	XC6122F544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF545	-	XC6122F545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF546	-	XC6122F546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF547	-	XC6122F547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF548	-	XC6122F548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF549	-	XC6122F549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF550	-	XC6122F550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF616	-	XC6122F616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF617	-	XC6122F617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF618	-	XC6122F618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF619	-	XC6122F619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF620	-	XC6122F620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF621	-	XC6122F621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF622	-	XC6122F622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF623	-	XC6122F623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF624	-	XC6122F624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF625	-	XC6122F625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF626	-	XC6122F626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF627	-	XC6122F627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF628	-	XC6122F628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF629	-	XC6122F629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF630	-	XC6122F630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF631	-	XC6122F631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF632	-	XC6122F632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF633	-	XC6122F633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF634	-	XC6122F634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF635	-	XC6122F635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF636	-	XC6122F636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF637	-	XC6122F637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF638	-	XC6122F638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF639	-	XC6122F639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF640	-	XC6122F640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF641	-	XC6122F641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF642	-	XC6122F642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF643	-	XC6122F643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF644	-	XC6122F644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF645	-	XC6122F645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF646	-	XC6122F646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF647	-	XC6122F647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF648	-	XC6122F648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF649	-	XC6122F649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF650	-	XC6122F650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF716	-	XC6122F716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF717	-	XC6122F717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF718	-	XC6122F718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF719	-	XC6122F719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF720	-	XC6122F720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF721	-	XC6122F721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF722	-	XC6122F722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF723	-	XC6122F723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF724	-	XC6122F724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF725	-	XC6122F725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF726	-	XC6122F726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF727	-	XC6122F727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF728	-	XC6122F728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF729	-	XC6122F729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF730	-	XC6122F730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KF731	-	XC6122F731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF732	-	XC6122F732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF733	-	XC6122F733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF734	-	XC6122F734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF735	-	XC6122F735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF736	-	XC6122F736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF737	-	XC6122F737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF738	-	XC6122F738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF739	-	XC6122F739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF740	-	XC6122F740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF741	-	XC6122F741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF742	-	XC6122F742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF743	-	XC6122F743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF744	-	XC6122F744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF745	-	XC6122F745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF746	-	XC6122F746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF747	-	XC6122F747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF748	-	XC6122F748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF749	-	XC6122F749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF750	-	XC6122F750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, PUR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
KF8	-	XC9235C08D0R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KF8	-	XC9235C08D4R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KF8	-	XC9235C08DER-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KF8	-	XCL205C083AR-G	DC-DC-IC	PWM step-down, 3MHz, 0.8V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KF9	-	XC9235C09D0R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KF9	-	XC9235C09D4R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KF9	-	XC9235C09DER-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KF9	-	XCL205C093AR-G	DC-DC-IC	PWM step-down, 3MHz, 0.9V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KFL	-	XC9235C0LD0R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KFL	-	XC9235C0LD4R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KFL	-	XC9235C0LDER-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KFL	-	XCL205C0L3AR-G	DC-DC-IC	PWM step-down, 3MHz, 0.85V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KFM	-	XC9235C0MD0R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KFM	-	XC9235C0MD4R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KFM	-	XC9235C0MDER-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KFM	-	XCL205C0M3AR-G	DC-DC-IC	PWM step-down, 3MHz, 0.95V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KG	-	MIC2211-2.6/1.8BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(150mA)/1.8V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
KG	-	PZU13B2L	Z-diode	13V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
KG	-	R3116K131C	Vdet-IC	1.3V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KG	-	RP107K401B	LVR-IC	LDO, 4.0V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
KGZ	mb	MIC5310-2.6/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/1.8V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
KH	-	LD6805K/22H	LVR-IC	LDO, 2.2V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
KH	-	MIC5380-2.6/2.0YFT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/2.0V±2%, 150mA, +CE	MLF-6A	81g5	VR19	9x	Mcr
KH	-	PZU14B2L	Z-diode	14V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
KH	-	R3116K141C	Vdet-IC	1.4V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KH	-	RP107K411B	LVR-IC	LDO, 4.1V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
KH0	-	XC9235C10D0R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KH0	-	XC9235C10D4R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KH0	-	XC9235C10DER-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KH0	-	XCL205C103AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.0V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KH1	-	XC9235C11D0R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KH1	-	XC9235C11D4R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KH1	-	XC9235C11DER-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KH1	-	XCL205C113AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.1V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KH2	-	XC9235C12D0R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KH2	-	XC9235C12D4R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KH2	-	XC9235C12DER-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KH2	-	XCL205C123AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.2V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KH3	-	XC9235C13D0R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KH3	-	XC9235C13D4R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KH3	-	XC9235C13DER-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KH3	-	XCL205C133AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.3V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KH4	-	XC9235C14D0R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KH4	-	XC9235C14D4R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KH4	-	XC9235C14DER-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KH4	-	XCL205C143AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.4V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KH5	-	XC9235C15D0R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KH5	-	XC9235C15D4R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KH5	-	XC9235C15DER-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KH5	-	XCL205C153AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.5V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KH6	-	XC9235C16D0R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KH6	-	XC9235C16D4R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KH6	-	XC9235C16DER-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KH6	-	XCL205C163AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.6V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KH7	-	XC9235C17D0R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KH7	-	XC9235C17D4R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KH7	-	XC9235C17DER-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KH7	-	XCL205C173AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.7V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KH8	-	XC9235C18D0R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KH8	-	XC9235C18D4R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KH8	-	XC9235C18DER-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KH8	-	XCL205C183AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.8V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KH9	-	XC9235C19D0R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KH9	-	XC9235C19D4R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KH9	-	XC9235C19DER-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KH9	-	XCL205C193AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.9V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KHA	-	XC9235C1AD0R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KHA	-	XC9235C1AD4R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KHA	-	XC9235C1ADER-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KHA	-	XCL205C1A3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.05V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KHB	-	XC9235C1BD0R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KHB	-	XC9235C1BD4R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KHB	-	XC9235C1BDER-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KHB	-	XCL205C1B3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.15V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KHC	-	XC9235C1CD0R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KHC	-	XC9235C1CD4R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KHC	-	XC9235C1CDER-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KHC	-	XCL205C1C3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.25V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KHD	-	XC9235C1DD0R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KHD	-	XC9235C1DD4R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KHD	-	XC9235C1DDER-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KHD	-	XCL205C1D3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.35V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KHE	-	XC9235C1ED0R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KHE	-	XC9235C1ED4R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KHE	-	XC9235C1EDER-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KHE	-	XCL205C1E3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.45V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KHF	-	XC9235C1FD0R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KHF	-	XC9235C1FD4R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KHF	-	XC9235C1FDER-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KHF	-	XCL205C1F3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.55V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KHH	-	XC9235C1HD0R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KHH	-	XC9235C1HD4R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KHH	-	XC9235C1HDER-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KHH	-	XCL205C1H3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.65V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KHK	-	XC9235C1KD0R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KHK	-	XC9235C1KD4R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KHK	-	XC9235C1KDER-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KHK	-	XCL205C1K3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.75V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KHL	-	XC9235C1LD0R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KHL	-	XC9235C1LD4R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KHL	-	XC9235C1LDER-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KHL	-	XCL205C1L3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.85V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KHM	-	XC9235C1MD0R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KHM	-	XC9235C1MD4R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KHM	-	XC9235C1MDER-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KHM	-	XCL205C1M3AR-G	DC-DC-IC	PWM step-down, 3MHz, 1.95V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KJ	-	R3116K151C	Vdet-IC	1.5V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KJ	-	RP107K421B	LVR-IC	LDO, 4.2V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
KK	-	PZU15B2L	Z-diode	15V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
KK	-	R3116K161C	Vdet-IC	1.6V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KK	-	RD74LVC2G17WPE	CMOS-Log	Dual Schmitt-trigger buffers	WCSP-6	40	Log27	9d	Ren
KK	-	RP107K121B5	LVR-IC	LDO, 1.25V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
KK0	-	XC9235C20D0R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KK0	-	XC9235C20D4R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KK0	-	XC9235C20DER-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KK0	-	XCL205C203AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.0V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KK1	-	XC9235C21D0R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KK1	-	XC9235C21D4R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KK1	-	XC9235C21DER-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KK1	-	XCL205C213AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.1V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KK2	-	XC9235C22D0R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KK2	-	XC9235C22D4R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KK2	-	XC9235C22DER-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KK2	-	XCL205C223AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.2V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KK3	-	XC9235C23D0R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KK3	-	XC9235C23D4R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KK3	-	XC9235C23DER-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KK3	-	XCL205C233AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.3V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KK4	-	XC9235C24D0R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KK4	-	XC9235C24D4R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KK4	-	XC9235C24DER-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KK4	-	XCL205C243AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.4V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KK5	-	XC9235C25D0R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KK5	-	XC9235C25D4R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KK5	-	XC9235C25DER-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KK5	-	XCL205C253AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.5V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KK6	-	XC9235C26D0R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KK6	-	XC9235C26D4R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KK6	-	XC9235C26DER-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KK6	-	XCL205C263AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.6V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KK7	-	XC9235C27D0R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KK7	-	XC9235C27D4R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KK7	-	XC9235C27DER-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KK7	-	XCL205C273AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.7V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KK8	-	XC9235C28D0R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KK8	-	XC9235C28D4R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KK8	-	XC9235C28DER-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KK8	-	XCL205C283AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.8V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KK9	-	XC9235C29D0R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KK9	-	XC9235C29D4R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KK9	-	XC9235C29DER-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KK9	-	XCL205C293AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.9V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KKA	-	XC9235C2AD0R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KKA	-	XC9235C2AD4R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KKA	-	XC9235C2ADER-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KKA	-	XCL205C2A3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.05V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KKB	-	XC9235C2BD0R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KKB	-	XC9235C2BD4R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KKB	-	XC9235C2BDER-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KKB	-	XCL205C2B3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.15V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KKC	-	XC9235C2CD0R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KKC	-	XC9235C2CD4R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KKC	-	XC9235C2CDER-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KKC	-	XCL205C2C3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.25V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KKD	-	XC9235C2DD0R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KKD	-	XC9235C2DD4R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KKD	-	XC9235C2DDER-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KKD	-	XCL205C2D3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.35V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KKE	-	XC9235C2ED0R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KKE	-	XC9235C2ED4R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KKE	-	XC9235C2EDER-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KKE	-	XCL205C2E3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.45V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KKF	-	XC9235C2FD0R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KKF	-	XC9235C2FD4R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KKF	-	XC9235C2FDER-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KKF	-	XCL205C2F3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.55V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KKH	-	XC9235C2HD0R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KKH	-	XC9235C2HD4R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KKH	-	XC9235C2HDER-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KKH	-	XCL205C2H3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.65V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KKK	-	XC9235C2KD0R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KKK	-	XC9235C2KD4R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KKK	-	XC9235C2KDER-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KKK	-	XCL205C2K3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.75V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KKL	-	XC9235C2LD0R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KKL	-	XC9235C2LD4R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KKL	-	XC9235C2LDER-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KKL	-	XCL205C2L3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.85V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KKM	-	XC9235C2MD0R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KKM	-	XC9235C2MD4R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KKM	-	XC9235C2MDER-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KKM	-	XCL205C2M3AR-G	DC-DC-IC	PWM step-down, 3MHz, 2.95V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KL	-	PZU16B2L	Z-diode	16V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
KL	-	R3116K171C	Vdet-IC	1.7V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KL	-	RP107K181B5	LVR-IC	LDO, 1.85V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
KL0	-	XC9235C30D0R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KL0	-	XC9235C30D4R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KL0	-	XC9235C30DER-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KL0	-	XCL205C303AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.0V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KL1	-	XC9235C31D0R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KL1	-	XC9235C31D4R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KL1	-	XC9235C31DER-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KL1	-	XCL205C313AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.1V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KL2	-	XC9235C32D0R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KL2	-	XC9235C32D4R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KL2	-	XC9235C32DER-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KL2	-	XCL205C323AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.2V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KL3	-	XC9235C33D0R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KL3	-	XC9235C33D4R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KL3	-	XC9235C33DER-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KL3	-	XCL205C333AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.3V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KL4	-	XC9235C34D0R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KL4	-	XC9235C34D4R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KL4	-	XC9235C34DER-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KL4	-	XCL205C343AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.4V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KL5	-	XC9235C35D0R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KL5	-	XC9235C35D4R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KL5	-	XC9235C35DER-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KL5	-	XCL205C353AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.5V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KL6	-	XC9235C36D0R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KL6	-	XC9235C36D4R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KL6	-	XC9235C36DER-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KL6	-	XCL205C363AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.6V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KL7	-	XC9235C37D0R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KL7	-	XC9235C37D4R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KL7	-	XC9235C37DER-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KL7	-	XCL205C373AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.7V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KL8	-	XC9235C38D0R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KL8	-	XC9235C38D4R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KL8	-	XC9235C38DER-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KL8	-	XCL205C383AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.8V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KL9	-	XC9235C39D0R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KL9	-	XC9235C39D4R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KL9	-	XC9235C39DER-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KL9	-	XCL205C393AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.9V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KLA	-	XC9235C3AD0R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KLA	-	XC9235C3AD4R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KLA	-	XC9235C3ADER-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KLA	-	XCL205C3A3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.05V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KLB	-	XC9235C3BD0R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KLB	-	XC9235C3BD4R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KLB	-	XC9235C3BDER-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KLB	-	XCL205C3B3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.15V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KLC	-	XC9235C3CD0R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KLC	-	XC9235C3CD4R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KLC	-	XC9235C3CDER-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KLC	-	XCL205C3C3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.25V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KLD	-	XC9235C3DD0R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KLD	-	XC9235C3DD4R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KLD	-	XC9235C3DDER-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KLD	-	XCL205C3D3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.35V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KLE	-	XC9235C3ED0R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KLE	-	XC9235C3ED4R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KLE	-	XC9235C3EDER-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KLE	-	XCL205C3E3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.45V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KLF	-	XC9235C3FD0R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KLF	-	XC9235C3FD4R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KLF	-	XC9235C3FDER-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KLF	-	XCL205C3F3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.55V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KLH	-	XC9235C3HD0R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KLH	-	XC9235C3HD4R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KLH	-	XC9235C3HDER-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KLH	-	XCL205C3H3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.65V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KLK	-	XC9235C3KD0R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KLK	-	XC9235C3KD4R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KLK	-	XC9235C3KDER-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KLK	-	XCL205C3K3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.75V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KLL	-	XC9235C3LD0R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KLL	-	XC9235C3LD4R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KLL	-	XC9235C3LDER-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KLL	-	XCL205C3L3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.85V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KLM	-	XC9235C3MD0R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KLM	-	XC9235C3MD4R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KLM	-	XC9235C3MDER-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KLM	-	XCL205C3M3AR-G	DC-DC-IC	PWM step-down, 3MHz, 3.95V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KM	-	PZU18B2L	Z-diode	18V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
KM	-	R3116K181C	Vdet-IC	1.8V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KM	-	RP107K281B5	LVR-IC	LDO, 2.85V±1%, 200mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
KM0	-	XC9235C40D0R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
KM0	-	XC9235C40D4R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
KM0	-	XC9235C40DER-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
KM0	-	XCL205C403AR-G	DC-DC-IC	PWM step-down, 3MHz, 4.0V±2%, 600mA, -CE, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
KN	-	PZU20B2L	Z-diode	20V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
KN	-	R3116K191C	Vdet-IC	1.9V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KN210	-	XC62KN212D	LVR-IC	LDO, -2.1V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN220	-	XC62KN222D	LVR-IC	LDO, -2.2V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN230	-	XC62KN232D	LVR-IC	LDO, -2.3V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN240	-	XC62KN242D	LVR-IC	LDO, -2.4V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN250	-	XC62KN252D	LVR-IC	LDO, -2.5V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN260	-	XC62KN262D	LVR-IC	LDO, -2.6V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN270	-	XC62KN272D	LVR-IC	LDO, -2.7V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN280	-	XC62KN282D	LVR-IC	LDO, -2.8V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN290	-	XC62KN292D	LVR-IC	LDO, -2.9V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN300	-	XC62KN302D	LVR-IC	LDO, -3.0V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN310	-	XC62KN312D	LVR-IC	LDO, -3.1V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN320	-	XC62KN322D	LVR-IC	LDO, -3.2V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN330	-	XC62KN332D	LVR-IC	LDO, -3.3V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN340	-	XC62KN342D	LVR-IC	LDO, -3.4V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN350	-	XC62KN352D	LVR-IC	LDO, -3.5V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN360	-	XC62KN362D	LVR-IC	LDO, -3.6V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN370	-	XC62KN372D	LVR-IC	LDO, -3.7V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN380	-	XC62KN382D	LVR-IC	LDO, -3.8V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN390	-	XC62KN392D	LVR-IC	LDO, -3.9V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN400	-	XC62KN402D	LVR-IC	LDO, -4.0V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN410	-	XC62KN412D	LVR-IC	LDO, -4.1V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN420	-	XC62KN422D	LVR-IC	LDO, -4.2V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN430	-	XC62KN432D	LVR-IC	LDO, -4.3V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN440	-	XC62KN442D	LVR-IC	LDO, -4.4V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN450	-	XC62KN452D	LVR-IC	LDO, -4.5V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN460	-	XC62KN462D	LVR-IC	LDO, -4.6V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN470	-	XC62KN472D	LVR-IC	LDO, -4.7V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN480	-	XC62KN482D	LVR-IC	LDO, -4.8V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN490	-	XC62KN492D	LVR-IC	LDO, -4.9V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN500	-	XC62KN502D	LVR-IC	LDO, -5.0V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN510	-	XC62KN512D	LVR-IC	LDO, -5.1V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN520	-	XC62KN522D	LVR-IC	LDO, -5.2V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN530	-	XC62KN532D	LVR-IC	LDO, -5.3V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN540	-	XC62KN542D	LVR-IC	LDO, -5.4V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN550	-	XC62KN552D	LVR-IC	LDO, -5.5V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN560	-	XC62KN562D	LVR-IC	LDO, -5.6V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN570	-	XC62KN572D	LVR-IC	LDO, -5.7V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN580	-	XC62KN582D	LVR-IC	LDO, -5.8V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN590	-	XC62KN592D	LVR-IC	LDO, -5.9V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN600	-	XC62KN602D	LVR-IC	LDO, -6.0V±2%, 100mA, 100mW	USP-6B	49xt	VR2	9b	Tor
KN8	-	XC9235D08C0R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KN8	-	XC9235D08C4R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KN8	-	XC9235D08CER-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KN9	-	XC9235D09C0R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KN9	-	XC9235D09C4R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KN9	-	XC9235D09CER-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KNL	-	XC9235D0LC0R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KNL	-	XC9235D0LC4R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KNL	-	XC9235D0LCER-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KNM	-	XC9235D0MC0R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KNM	-	XC9235D0MC4R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KNM	-	XC9235D0MCER-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KP	-	HD74LVC1G53CLE	CMOS-Log	2-channel analog multiplexer/demultiplexer	WCSP-5	46	Log38	9d	Ren
KP	-	HD74LVC1G53CPE	CMOS-Log	2-channel analog multiplexer/demultiplexer	WCSP-5	46	Log38	9d	Ren
KP	-	LD6805K/22P	LVR-IC	LDO, 2.2V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
KP	-	MIC2211-2.6/3.0BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V(150mA)/3.0V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
KP	-	PZU22B2L	Z-diode	22V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
KP	-	R3116K201C	Vdet-IC	2.0V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KP0	-	XC9235D10C0R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KP0	-	XC9235D10C4R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KP0	-	XC9235D10CER-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KP1	-	XC9235D11C0R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KP1	-	XC9235D11C4R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KP1	-	XC9235D11CER-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KP2	-	XC9235D12C0R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KP2	-	XC9235D12C4R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KP2	-	XC9235D12CER-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KP3	-	XC9235D13C0R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KP3	-	XC9235D13C4R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KP3	-	XC9235D13CER-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KP4	-	XC9235D14C0R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KP4	-	XC9235D14C4R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KP4	-	XC9235D14CER-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KP5	-	XC9235D15C0R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KP5	-	XC9235D15C4R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KP5	-	XC9235D15CER-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KP6	-	XC9235D16C0R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KP6	-	XC9235D16C4R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KP6	-	XC9235D16CER-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KP7	-	XC9235D17C0R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KP7	-	XC9235D17C4R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KP7	-	XC9235D17CER-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KP8	-	XC9235D18C0R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KP8	-	XC9235D18C4R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KP8	-	XC9235D18CER-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KP9	-	XC9235D19C0R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KP9	-	XC9235D19C4R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KP9	-	XC9235D19CER-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KPA	-	XC9235D1AC0R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KPA	-	XC9235D1AC4R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KPA	-	XC9235D1ACER-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KPB	-	XC9235D1BC0R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KPB	-	XC9235D1BC4R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KPB	-	XC9235D1BCER-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KPD	-	MIC5335-2.6/1.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/1.85±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
KPD	-	XC9235D1DC0R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KPD	-	XC9235D1DC4R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KPD	-	XC9235D1DCER-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KPE	-	XC9235D1EC0R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KPE	-	XC9235D1EC4R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KPE	-	XC9235D1ECER-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KPF	-	XC9235D1FC0R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KPF	-	XC9235D1FC4R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KPF	-	XC9235D1FCER-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KPG	-	MIC5335-2.6/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/1.8V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
KPH	-	XC9235D1HC0R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KPH	-	XC9235D1HC4R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KPH	-	XC9235D1HCER-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KPK	-	XC9235D1KC0R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KPK	-	XC9235D1KC4R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KPK	-	XC9235D1KCER-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KPL	-	XC9235D1LC0R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KPL	-	XC9235D1LC4R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KPL	-	XC9235D1LCER-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KPM	-	XC9235D1MC0R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KPM	-	XC9235D1MC4R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KPM	-	XC9235D1MCER-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KPV	-	XC9235D1CC0R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KPV	-	XC9235D1CC4R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KPV	-	XC9235D1CCER-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KQ	-	R3116K211C	Vdet-IC	2.1V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KR	-	HD74LVC1G57CLE	CMOS-Log	Configurable multiple-function gate	WCSP-5	46	Log36	9d	Ren
KR	-	PZU24B2L	Z-diode	24V±2%, If=200mA, 250mW	SOT-882	13d	-	2b	Phi
KR	-	R3116K221C	Vdet-IC	2.2V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KR0	-	XC9235D20C0R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KR0	-	XC9235D20C4R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KR0	-	XC9235D20CER-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KR1	-	XC9235D21C0R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KR1	-	XC9235D21C4R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KR1	-	XC9235D21CER-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KR2	-	XC9235D22C0R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KR2	-	XC9235D22C4R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KR2	-	XC9235D22CER-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KR3	-	XC9235D23C0R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KR3	-	XC9235D23C4R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KR3	-	XC9235D23CER-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KR4	-	XC9235D24C0R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KR4	-	XC9235D24C4R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KR4	-	XC9235D24CER-G	Z-diode	PWM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KR5	-	XC9235D25C0R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KR5	-	XC9235D25C4R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KR5	-	XC9235D25CER-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KR6	-	XC9235D26C0R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KR6	-	XC9235D26C4R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KR6	-	XC9235D26CER-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KR7	-	XC9235D27C0R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KR7	-	XC9235D27C4R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KR7	-	XC9235D27CER-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KR8	-	XC9235D28C0R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KR8	-	XC9235D28C4R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KR8	-	XC9235D28CER-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KR9	-	XC9235D29C0R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KR9	-	XC9235D29C4R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KR9	-	XC9235D29CER-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KRA	-	XC9235D2AC0R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KRA	-	XC9235D2AC4R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KRA	-	XC9235D2ACER-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KRB	-	XC9235D2BC0R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KRB	-	XC9235D2BC4R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KRB	-	XC9235D2BCER-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KRC	-	XC9235D2CC0R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KRC	-	XC9235D2CC4R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KRC	-	XC9235D2CCER-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KRD	-	XC9235D2DC0R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KRD	-	XC9235D2DC4R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KRD	-	XC9235D2DCER-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KRE	-	XC9235D2EC0R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KRE	-	XC9235D2EC4R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KRE	-	XC9235D2ECER-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KRF	-	XC9235D2FC0R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KRF	-	XC9235D2FC4R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KRF	-	XC9235D2FCER-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KRH	-	XC9235D2HC0R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KRH	-	XC9235D2HC4R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KRH	-	XC9235D2HCER-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KRK	-	XC9235D2KC0R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KRK	-	XC9235D2KC4R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KRK	-	XC9235D2KCER-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KRL	-	XC9235D2LC0R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KRL	-	XC9235D2LC4R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KRL	-	XC9235D2LCER-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KRM	-	XC9235D2MC0R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KRM	-	XC9235D2MC4R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KRM	-	XC9235D2MCER-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KS	-	R3116K231C	Vdet-IC	2.3V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KS0	-	XC9235D30C0R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KS0	-	XC9235D30C4R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KS0	-	XC9235D30CER-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KS1	-	XC9235D31C0R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KS1	-	XC9235D31C4R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KS1	-	XC9235D31CER-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KS2	-	XC9235D32C0R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KS2	-	XC9235D32C4R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KS2	-	XC9235D32CER-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KS3	-	XC9235D33C0R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KS3	-	XC9235D33C4R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KS3	-	XC9235D33CER-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KS4	-	XC9235D34C0R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KS4	-	XC9235D34C4R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KS4	-	XC9235D34CER-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KS5	-	XC9235D35C0R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KS5	-	XC9235D35C4R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KS5	-	XC9235D35CER-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KS6	-	XC9235D36C0R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KS6	-	XC9235D36C4R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KS6	-	XC9235D36CER-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KS7	-	XC9235D37C0R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KS7	-	XC9235D37C4R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KS7	-	XC9235D37CER-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KS8	-	XC9235D38C0R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KS8	-	XC9235D38C4R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KS8	-	XC9235D38CER-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KS9	-	XC9235D39C0R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KS9	-	XC9235D39C4R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KS9	-	XC9235D39CER-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KSA	-	XC9235D3AC0R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KSA	-	XC9235D3AC4R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KSA	-	XC9235D3ACER-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KSB	-	XC9235D3BC0R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KSB	-	XC9235D3BC4R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KSB	-	XC9235D3BCER-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KSC	-	XC9235D3CC0R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KSC	-	XC9235D3CC4R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KSC	-	XC9235D3CCER-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KSD	-	XC9235D3DC0R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KSD	-	XC9235D3DC4R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KSD	-	XC9235D3DCER-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KSE	-	XC9235D3EC0R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KSE	-	XC9235D3EC4R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KSE	-	XC9235D3ECER-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KSF	-	XC9235D3FC0R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KSF	-	XC9235D3FC4R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KSF	-	XC9235D3FCER-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KSH	-	XC9235D3HC0R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KSH	-	XC9235D3HC4R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KSH	-	XC9235D3HCER-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KSK	-	XC9235D3KC0R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KSK	-	XC9235D3KC4R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KSK	-	XC9235D3KCER-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KSL	-	XC9235D3LC0R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KSL	-	XC9235D3LC4R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KSL	-	XC9235D3LCER-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KSM	-	XC9235D3MC0R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KSM	-	XC9235D3MC4R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KSM	-	XC9235D3MCER-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KT	-	HD74LVC1G58CLE	CMOS-Log	Configurable multiple-function gate	WCSP-5	46	Log37	9d	Ren
KT	-	HD74LVC1G58CPE	CMOS-Log	Configurable multiple-function gate	WCSP-5	46	Log37	9d	Ren
KT	-	R3116K241C	Vdet-IC	2.4V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KT0	-	XC9235D40C0R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KT0	-	XC9235D40C4R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KT0	-	XC9235D40CER-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KU	-	R3116K251C	Vdet-IC	2.5V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KU8	-	XC9235D08D0R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KU8	-	XC9235D08D4R-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KU8	-	XC9235D08DER-G	DC-DC-IC	PWM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KU9	-	XC9235D09D0R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KU9	-	XC9235D09D4R-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KU9	-	XC9235D09DER-G	DC-DC-IC	PWM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KUL	-	XC9235D0LD0R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KUL	-	XC9235D0LD4R-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KUL	-	XC9235D0LDER-G	DC-DC-IC	PWM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KUM	-	XC9235D0MD0R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KUM	-	XC9235D0MD4R-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KUM	-	XC9235D0MDER-G	DC-DC-IC	PWM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KV	-	R3116K261C	Vdet-IC	2.6V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KV0	-	XC9235D10D0R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KV0	-	XC9235D10D4R-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KV0	-	XC9235D10DER-G	DC-DC-IC	PWM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KV1	-	XC9235D11D0R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KV1	-	XC9235D11D4R-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KV1	-	XC9235D11DER-G	DC-DC-IC	PWM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KV2	-	XC9235D12D0R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KV2	-	XC9235D12D4R-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KV2	-	XC9235D12DER-G	DC-DC-IC	PWM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KV3	-	XC9235D13D0R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KV3	-	XC9235D13D4R-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KV3	-	XC9235D13DER-G	DC-DC-IC	PWM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KV4	-	XC9235D14D0R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KV4	-	XC9235D14D4R-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KV4	-	XC9235D14DER-G	DC-DC-IC	PWM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KV5	-	XC9235D15D0R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KV5	-	XC9235D15D4R-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KV5	-	XC9235D15DER-G	DC-DC-IC	PWM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KV6	-	XC9235D16D0R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KV6	-	XC9235D16D4R-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KV6	-	XC9235D16DER-G	DC-DC-IC	PWM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KV7	-	XC9235D17D0R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KV7	-	XC9235D17D4R-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KV7	-	XC9235D17DER-G	DC-DC-IC	PWM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KV8	-	XC9235D18D0R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KV8	-	XC9235D18D4R-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KV8	-	XC9235D18DER-G	DC-DC-IC	PWM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KV9	-	XC9235D19D0R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KV9	-	XC9235D19D4R-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KV9	-	XC9235D19DER-G	DC-DC-IC	PWM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KVA	-	XC9235D1AD0R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KVA	-	XC9235D1AD4R-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KVA	-	XC9235D1ADER-G	DC-DC-IC	PWM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KVB	-	XC9235D1BD0R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KVB	-	XC9235D1BD4R-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KVB	-	XC9235D1BDER-G	DC-DC-IC	PWM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KVC	-	XC9235D1CD0R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KVC	-	XC9235D1CD4R-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KVC	-	XC9235D1CDER-G	DC-DC-IC	PWM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KVD	-	XC9235D1DD0R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KVD	-	XC9235D1DD4R-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KVD	-	XC9235D1DDER-G	DC-DC-IC	PWM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KVE	-	XC9235D1ED0R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KVE	-	XC9235D1ED4R-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KVE	-	XC9235D1EDER-G	DC-DC-IC	PWM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KVF	-	XC9235D1FD0R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KVF	-	XC9235D1FD4R-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KVF	-	XC9235D1FDER-G	DC-DC-IC	PWM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KVH	-	XC9235D1HD0R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KVH	-	XC9235D1HD4R-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KVH	-	XC9235D1HDER-G	DC-DC-IC	PWM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KVK	-	XC9235D1KD0R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KVK	-	XC9235D1KD4R-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KVK	-	XC9235D1KDER-G	DC-DC-IC	PWM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KVL	-	XC9235D1LD0R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KVL	-	XC9235D1LD4R-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KVL	-	XC9235D1LDER-G	DC-DC-IC	PWM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KVM	-	XC9235D1MD0R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KVM	-	XC9235D1MD4R-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KVM	-	XC9235D1MDER-G	DC-DC-IC	PWM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KW	-	R3116K271C	Vdet-IC	2.7V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KX	-	R3116K281C	Vdet-IC	2.8V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KX0	-	XC9235D20D0R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KX0	-	XC9235D20D4R-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KX0	-	XC9235D20DER-G	DC-DC-IC	PWM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KX1	-	XC9235D21D0R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KX1	-	XC9235D21D4R-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KX1	-	XC9235D21DER-G	DC-DC-IC	PWM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KX2	-	XC9235D22D0R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KX2	-	XC9235D22D4R-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KX2	-	XC9235D22DER-G	DC-DC-IC	PWM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KX3	-	XC9235D23D0R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KX3	-	XC9235D23D4R-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KX3	-	XC9235D23DER-G	DC-DC-IC	PWM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KX4	-	XC9235D24D0R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KX4	-	XC9235D24D4R-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KX4	-	XC9235D24DER-G	DC-DC-IC	PWM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KX5	-	XC9235D25D0R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KX5	-	XC9235D25D4R-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KX5	-	XC9235D25DER-G	DC-DC-IC	PWM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KX6	-	XC9235D26D0R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KX6	-	XC9235D26D4R-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KX6	-	XC9235D26DER-G	DC-DC-IC	PWM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KX7	-	XC9235D27D0R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KX7	-	XC9235D27D4R-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KX7	-	XC9235D27DER-G	DC-DC-IC	PWM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KX8	-	XC9235D28D0R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KX8	-	XC9235D28D4R-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KX8	-	XC9235D28DER-G	DC-DC-IC	PWM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KX9	-	XC9235D29D0R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KX9	-	XC9235D29D4R-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KX9	-	XC9235D29DER-G	DC-DC-IC	PWM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KXA	-	XC9235D2AD0R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KXA	-	XC9235D2AD4R-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KXA	-	XC9235D2ADER-G	DC-DC-IC	PWM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KXB	-	XC9235D2BD0R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KXB	-	XC9235D2BD4R-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KXB	-	XC9235D2BDER-G	DC-DC-IC	PWM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KXC	-	XC9235D2CD0R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KXC	-	XC9235D2CD4R-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KXC	-	XC9235D2CDER-G	DC-DC-IC	PWM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KXD	-	XC9235D2DD0R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KXD	-	XC9235D2DD4R-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KXD	-	XC9235D2DDER-G	DC-DC-IC	PWM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KXE	-	XC9235D2ED0R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KXE	-	XC9235D2ED4R-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KXE	-	XC9235D2EDER-G	DC-DC-IC	PWM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KXF	-	XC9235D2FD0R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KXF	-	XC9235D2FD4R-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KXF	-	XC9235D2FDER-G	DC-DC-IC	PWM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KXH	-	XC9235D2HD0R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KXH	-	XC9235D2HD4R-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KXH	-	XC9235D2HDER-G	DC-DC-IC	PWM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KXK	-	XC9235D2KD0R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KXK	-	XC9235D2KD4R-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KXK	-	XC9235D2KDER-G	DC-DC-IC	PWM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KXL	-	XC9235D2LD0R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KXL	-	XC9235D2LD4R-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KXL	-	XC9235D2LDER-G	DC-DC-IC	PWM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KXM	-	XC9235D2MD0R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KXM	-	XC9235D2MD4R-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KXM	-	XC9235D2MDER-G	DC-DC-IC	PWM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KY	-	R3116K291C	Vdet-IC	2.9V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KY0	-	XC9235D30D0R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KY0	-	XC9235D30D4R-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KY0	-	XC9235D30DER-G	DC-DC-IC	PWM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KY1	-	XC9235D31D0R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KY1	-	XC9235D31D4R-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KY1	-	XC9235D31DER-G	DC-DC-IC	PWM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KY2	-	XC9235D32D0R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KY2	-	XC9235D32D4R-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
KY2	-	XC9235D32DER-G	DC-DC-IC	PWM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KY3	-	XC9235D33D0R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KY3	-	XC9235D33D4R-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KY3	-	XC9235D33DER-G	DC-DC-IC	PWM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KY4	-	XC9235D34D0R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KY4	-	XC9235D34D4R-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KY4	-	XC9235D34DER-G	DC-DC-IC	PWM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KY5	-	XC9235D35D0R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KY5	-	XC9235D35D4R-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KY5	-	XC9235D35DER-G	DC-DC-IC	PWM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KY6	-	XC9235D36D0R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KY6	-	XC9235D36D4R-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KY6	-	XC9235D36DER-G	DC-DC-IC	PWM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KY7	-	XC9235D37D0R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KY7	-	XC9235D37D4R-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KY7	-	XC9235D37DER-G	DC-DC-IC	PWM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KY8	-	XC9235D38D0R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KY8	-	XC9235D38D4R-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KY8	-	XC9235D38DER-G	DC-DC-IC	PWM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KY9	-	XC9235D39D0R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KY9	-	XC9235D39D4R-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KY9	-	XC9235D39DER-G	DC-DC-IC	PWM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KYA	-	XC9235D3AD0R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KYA	-	XC9235D3AD4R-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KYA	-	XC9235D3ADER-G	DC-DC-IC	PWM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KYB	-	XC9235D3BD0R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KYB	-	XC9235D3BD4R-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KYB	-	XC9235D3BDER-G	DC-DC-IC	PWM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KYC	-	XC9235D3CD0R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KYC	-	XC9235D3CD4R-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KYC	-	XC9235D3CDER-G	DC-DC-IC	PWM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KYD	-	XC9235D3DD0R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KYD	-	XC9235D3DD4R-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KYD	-	XC9235D3DDER-G	DC-DC-IC	PWM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KYE	-	XC9235D3ED0R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KYE	-	XC9235D3ED4R-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KYE	-	XC9235D3EDER-G	DC-DC-IC	PWM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KYF	-	XC9235D3FD0R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KYF	-	XC9235D3FD4R-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KYF	-	XC9235D3FDER-G	DC-DC-IC	PWM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KYH	-	XC9235D3HD0R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KYH	-	XC9235D3HD4R-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KYH	-	XC9235D3HDER-G	DC-DC-IC	PWM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KYK	-	XC9235D3KD0R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KYK	-	XC9235D3KD4R-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KYK	-	XC9235D3KDER-G	DC-DC-IC	PWM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KYL	-	XC9235D3LD0R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KYL	-	XC9235D3LD4R-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KYL	-	XC9235D3LDER-G	DC-DC-IC	PWM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KYM	-	XC9235D3MD0R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KYM	-	XC9235D3MD4R-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KYM	-	XC9235D3MDER-G	DC-DC-IC	PWM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
KZ	-	R3116K301C	Vdet-IC	3.0V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
KZ0	-	XC9235D40D0R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
KZ0	-	XC9235D40D4R-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
KZ0	-	XC9235D40DER-G	DC-DC-IC	PWM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
L	-	BAT62-02L	Si-diode	Schottky, 40V, 20mA; Vf<1.0V, Cd<0.6pF	TSLP-2-1	13d	-	2b	Inf
L	-	HMPS-2820	Si-diode	SBD, RF, 15V±2%, 1A(1μs), <1pF	MP	93d	-	9m	Agi
L0	-	R3117K073A	Vdet-IC	0.7V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
L0	-	RP114K081B	LVR-IC	LDO, 0.8V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
L0	-	XC6GN1002HR	Vdet-IC	1.0V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
L03	-	XC61GN1002HR	Vdet-IC	1.0V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
L085B	-	LP3990SDX-0.8	LVR-IC	0.8V±1.5%, 150mA, +CE	LLP-6	56va	VR4	9c	Nsc
L086B	-	LP3990SDX-1.2	LVR-IC	1.2V±1.5%, 150mA, +CE	LLP-6	56va	VR4	9c	Nsc
L087B	-	LP3990SDX-1.5	LVR-IC	1.5V±1.5%, 150mA, +CE	LLP-6	56va	VR4	9c	Nsc
L088B	-	LP3990SDX-1.8	LVR-IC	1.8V±1.5%, 150mA, +CE	LLP-6	56va	VR4	9c	Nsc
L090B	-	LP3990SDX-2.5	LVR-IC	2.5V±1.5%, 150mA, +CE	LLP-6	56va	VR4	9c	Nsc
L091B	-	LP3990SDX-2.8	LVR-IC	2.8V±1.5%, 150mA, +CE	LLP-6	56va	VR4	9c	Nsc
L0A	-	XC6108N10AGR	Vdet-IC	1.0V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L0B	-	XC6108N10BGR	Vdet-IC	1.0V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L0C	-	XC6108N10CGR	Vdet-IC	1.0V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L0D	-	XC6108N10DGR	Vdet-IC	1.0V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L1	-	R3117K083A	Vdet-IC	0.8V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
L1	-	RP114K091B	LVR-IC	LDO, 0.9V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
L1	-	XC6GN1102HR	Vdet-IC	1.1V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
L12	-	LP5900SD-2.8	LVR-IC	2.8V±2%, 150mA, +CE, LN	LLP-6	56ep	VR4	9a	Nsc
L13	-	LP5900SD-2.5	LVR-IC	2.5V±2%, 150mA, +CE, LN	LLP-6	56ep	VR4	9a	Nsc
L13	-	XC61GN1102HR	Vdet-IC	1.1V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
L14	-	LP5900SD-2.7	LVR-IC	2.7V±2%, 150mA, +CE, LN	LLP-6	56ep	VR4	9a	Nsc
L15	-	LP5900SD-1.5	LVR-IC	1.5V±2%, 150mA, +CE, LN	LLP-6	56ep	VR4	9a	Nsc
L150B	-	LP3990SDX-1.35	LVR-IC	1.35V±1.5%, 150mA, +CE	LLP-6	56va	VR4	9c	Nsc
L16	-	LP5900SD-3.3	LVR-IC	3.3V±2%, 150mA, +CE, LN	LLP-6	56ep	VR4	9a	Nsc
L17	-	LP5900SD-1.8	LVR-IC	1.8V±2%, 150mA, +CE, LN	LLP-6	56ep	VR4	9a	Nsc
L18	-	LP5900SD-2.0	LVR-IC	2.0V±2%, 150mA, +CE, LN	LLP-6	56ep	VR4	9a	Nsc
L19	-	LP5900SD-2.2	LVR-IC	2.2V±2%, 150mA, +CE, LN	LLP-6	56ep	VR4	9a	Nsc
L1A	-	XC6108N11AGR	Vdet-IC	1.1V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L1B	-	XC6108N11BGR	Vdet-IC	1.1V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L1C	-	XC6108N11CGR	Vdet-IC	1.1V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L1D	-	XC6108N11DGR	Vdet-IC	1.1V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L2	-	BAP51LX	PIN-diode	RF, 60V, 100mA, 140mW, 0.3pF, 1.5Ω(100mA/100MHz), 13dB(2.45GHz)	SOD-882T	13d	-	2b	Phi
L2	-	R3117K093A	Vdet-IC	0.9V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
L2	-	RP114K101B	LVR-IC	LDO, 1.0V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
L2	-	XC6GN1202HR	Vdet-IC	1.2V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
L20	-	LP5900SD-3.0	LVR-IC	3.0V±2%, 150mA, +CE, LN	LLP-6	56ep	VR4	9a	Nsc
L23	-	XC61GN1202HR	Vdet-IC	1.2V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
L2A	-	XC6108N12AGR	Vdet-IC	1.2V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L2B	-	XC6108N12BGR	Vdet-IC	1.2V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L2C	-	XC6108N12CGR	Vdet-IC	1.2V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L2D	-	XC6108N12DGR	Vdet-IC	1.2V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L3	-	R3117K103A	Vdet-IC	1.0V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
L3	-	RP114K111B	LVR-IC	LDO, 1.1V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
L3	-	XC6GN1302HR	Vdet-IC	1.3V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
L33	-	XC61GN1302HR	Vdet-IC	1.3V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
L3A	-	XC6108N13AGR	Vdet-IC	1.3V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L3B	-	XC6108N13BGR	Vdet-IC	1.3V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L3C	-	XC6108N13CGR	Vdet-IC	1.3V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L3D	-	XC6108N13DGR	Vdet-IC	1.3V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L4	-	R3117K113A	Vdet-IC	1.1V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
L4	-	RP114K121B	LVR-IC	LDO, 1.2V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
L4	-	XC6GN1402HR	Vdet-IC	1.4V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
L43	-	XC61GN1402HR	Vdet-IC	1.4V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
L4665	-	LM4665LD	Lin-IC	AF PA, BTL, class-D, 2.7..5.5V, 1W(5V/8Ω), shutdown	DFN-10	37	AFP5	9a	Nsc
L4666	-	LM4666SDA	Lin-IC	AF PA, BTL, class-D, 4.5..5.5V, 2x1.2W(5V/8Ω), shutdown	DFN-16	37	-	9a	Nsc
L4670	-	LM4670SD	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/4Ω), shutdown	DFN-8	92	-	9a	Nsc
L4673	-	LM4673SD	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.65W(5V/4Ω), shutdown	DFN-8	92	AFP48	9a	Nsc
L4675	-	LM4675SD	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.8W(5V/4Ω), shutdown	DFN-8	92	AFP48	9a	Nsc
L4811	-	LM4811YD	Lin-IC	AF PA, 2..5.5V, 2x105mW(4V/16Ω), shutdown	DFN-10	37	-	9a	Nsc
l48410SQ	-	LM48410SQ	Lin-IC	AF PA, BTL, class-D, 2..5.5V, 2x2.3W(5V/4Ω), shutdown, 3D	LQFP-24	38	-	9a	Nsc
L4854LD	-	LM4854LD	Lin-IC	AF PA, BTL, 2.7..5.5V, 1.9W(4Ω)+2x85mW(8Ω), shutdown	DFN-14	37	-	9a	Nsc
L4871	-	LM4871LD	Lin-IC	AF PA, BTL, 2..5.5V, 3W(5V/3Ω), shutdown	DFN-8	92	AFP12	9a	Nsc
L4883SQ	-	LM4883SQ	Lin-IC	AF PA, BTL, 2..5.5V, 2x2.1W(5V/4Ω), shutdown	QFN-24	38	-	9a	Nsc
L4888SQ	-	LM4888SQ	Lin-IC	AF PA, BTL, 2..5.5V, 2x2.1W(5V/8Ω), 3D control	LQFN-24	38	-	9a	Nsc
L4889	-	LM4889LD	Lin-IC	AF PA, BTL, 2.7..5.5V, 1W(5V/8Ω), shutdown	DFN-10	37	AFP15	9j	Nsc
L4890	-	EMA1001IBL	Lin-IC	AF PA, BTL, 2..5.5V, 1W(5V/8Ω), shutdown	DFN-10	37	AFP15	9j	Emp
L4890	-	LM4890LD	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	DFN-10	37	AFP15	9j	Nsc
L4890	-	SH4890LD	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	DFN-10	37	AFP15	9a	Sit
L4891	-	LM4891LD	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	DFN-10	37	AFP15	9j	Nsc
L4892	-	LM4892LD	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.1W(5V/8Ω), shutdown	DFN-10	37	-	9a	Nsc
L4894	-	LM4894LD	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	DFN-10	37	AFP19	9a	Nsc
L4895	-	LM4895LD	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	DFN-10	37	AFP20	9a	Nsc
L4898	-	LM4898LD	Lin-IC	AF PA, BTL, 2.5..5.5V, 1W(5V/8Ω), shutdown	DFN-10	37	AFP19	9a	Nsc
L4899	-	LM4899LD	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	DFN-10	37	AFP20	9a	Nsc
L4901	-	LM4901LD	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.6W(5V/8Ω), shutdown	DFN-10	37	AFP26	9a	Nsc
L4905	-	LM4905LD	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	DFN-8	92	AFP12	9a	Nsc
L4906	-	LM4906LD	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	DFN-10	37	-	9a	Nsc
L4911	-	LM4911LD	Lin-IC	AF PA, BTL, 2.2..5.5V, 2x40mW(5V/16Ω), mute, shutdown	DFN-10	37	AFP30	9a	Nsc
L4916	-	LM4916LD	Lin-IC	AF PA, BTL, 2.2..5.5V, 85mW(3V/32Ω), shutdown	DFN-10	37	AFP32	9a	Nsc
L4917	-	LM4917SD	Lin-IC	AF PA, 2.2..5.5V, 2x95mW(5V/16Ω), shutdown	DFN-14	37	-	9a	Nsc
L4924	-	LM4924SD	Lin-IC	AF PA, BTL, 1.5..3.6V, 2x40mW(5V/16Ω), mute, shutdown	DFN-10	37	AFP33	9a	Nsc
L4928	-	LM4928SD	Lin-IC	AF PA, BTL, 2.4..5.5V, 1.2W(5V/8Ω), shutdown	DFN-14	37	-	9a	Nsc



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
L49450	-	LM49450SQ	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x1.2W(4Ω)+2x34mW(8Ω), I2S, I2C	LQFN-32	38	-	9a	Nsc
L4990	-	LM4990LD	Lin-IC	AF PA, BTL, 2.7..5.5V, 2W(5V/4Ω), shutdown	DFN-10	37	AFP26	9a	Nsc
L4991	-	LM4991LD	Lin-IC	AF PA, BTL, 2.7..5.5V, 3W(5.5V/8Ω), shutdown	DFN-8	92	AFP12	9a	Nsc
L4992	-	LM4992SD	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x1W(5V/8Ω), shutdown	DFN-14	37	-	9a	Nsc
L4995	-	LM4995SD	Lin-IC	AF PA, BTL, 2.4..5.5V, 1.3W(5V/8Ω), shutdown	DFN-8	92	AFP12	9a	Nsc
L4A	-	XC6108N14AGR	Vdet-IC	1.4V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L4B	-	XC6108N14BGR	Vdet-IC	1.4V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L4C	-	XC6108N14CGR	Vdet-IC	1.4V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L4D	-	XC6108N14DGR	Vdet-IC	1.4V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L5	-	R3117K123A	Vdet-IC	1.2V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
L5	-	RP114K131B	LVR-IC	LDO, 1.3V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
L5	-	XC6GN1502HR	Vdet-IC	1.5V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
L53	-	XC61GN1502HR	Vdet-IC	1.5V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
L5A	-	XC6108N15AGR	Vdet-IC	1.5V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L5B	-	XC6108N15BGR	Vdet-IC	1.5V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L5C	-	XC6108N15CGR	Vdet-IC	1.5V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L5D	-	XC6108N15DGR	Vdet-IC	1.5V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L6	-	R3117K133A	Vdet-IC	1.3V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
L6	-	RP114K141B	LVR-IC	LDO, 1.4V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
L6	-	XC6GN1602HR	Vdet-IC	1.6V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
L63	-	XC61GN1602HR	Vdet-IC	1.6V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
L6A	-	XC6108N16AGR	Vdet-IC	1.6V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L6B	-	XC6108N16BGR	Vdet-IC	1.6V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L6C	-	XC6108N16CGR	Vdet-IC	1.6V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L6D	-	XC6108N16DGR	Vdet-IC	1.6V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L7	-	R3117K143A	Vdet-IC	1.4V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
L7	-	RP114K151B	LVR-IC	LDO, 1.5V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
L7	-	XC6GN1702HR	Vdet-IC	1.7V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
L73	-	XC61GN1702HR	Vdet-IC	1.7V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
L7990	-	SH4990LD	Lin-IC	AF PA, BTL, 2.2..5.5V, 2W(5V/4Ω), select shutdown	DFN-10	37	AFP26	9a	Sit
L7A	-	XC6108N17AGR	Vdet-IC	1.7V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L7B	-	XC6108N17BGR	Vdet-IC	1.7V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L7C	-	XC6108N17CGR	Vdet-IC	1.7V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L7D	-	XC6108N17DGR	Vdet-IC	1.7V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L8	-	R3117K153A	Vdet-IC	1.5V±15mV, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
L8	-	RP114K161B	LVR-IC	LDO, 1.6V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
L8	-	XC6GN1802HR	Vdet-IC	1.8V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
L83	-	XC61GN1802HR	Vdet-IC	1.8V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
L8A	-	XC6108N18AGR	Vdet-IC	1.8V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L8A	-	XC6118C08AGR-G	Vdet-IC	0.8V±30mV, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
L8B	-	XC6108N18BGR	Vdet-IC	1.8V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L8B	-	XC6118C08BGR-G	Vdet-IC	0.8V±30mV, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
L8C	-	XC6108N18CGR	Vdet-IC	1.8V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L8C	-	XC6118C08CGR-G	Vdet-IC	0.8V±30mV, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
L8D	-	XC6108N18DGR	Vdet-IC	1.8V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L8D	-	XC6118C08DGR-G	Vdet-IC	0.8V±30mV, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
L9	-	R3117K163A	Vdet-IC	1.6V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
L9	-	RP114K171B	LVR-IC	LDO, 1.7V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
L9	-	XC6GN1902HR	Vdet-IC	1.9V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
L93	-	XC61GN1902HR	Vdet-IC	1.9V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
L9A	-	XC6108N19AGR	Vdet-IC	1.9V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L9A	-	XC6118C09AGR-G	Vdet-IC	0.9V±30mV, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
L9B	-	XC6108N19BGR	Vdet-IC	1.9V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
L9B	-	XC6118C09BGR-G	Vdet-IC	0.9V±30mV, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
L9C	-	XC6108N19CGR	Vdet-IC	1.9V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L9C	-	XC6118C09CGR-G	Vdet-IC	0.9V±30mV, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
L9D	-	XC6108N19DGR	Vdet-IC	1.9V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
L9D	-	XC6118C09DGR-G	Vdet-IC	0.9V±30mV, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
LA	-	GDZ3.9	Z-diode	3.74..4.16V, Izt=5.0mA, 100mW	GMD2	13d	-	2w	Rhm
LA	-	R3116K311C	Vdet-IC	3.1V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LA	-	RP107K101D	LVR-IC	LDO, 1.0V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LA09	-	XC6219A092DR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA0M	-	XC6219A09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA10	-	XC6219A102DR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA11	-	XC6219A112DR	LVR-IC	LDO, 1.1.0V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA12	-	XC6219A122DR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA13	-	XC6219A132DR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA14	-	XC6219A142DR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA15	-	XC6219A152DR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA16	-	XC6219A162DR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LA17	-	XC6219A172DR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA18	-	XC6219A182DR	LVR-IC	LDO, 1.8V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA19	-	XC6219A192DR	LVR-IC	LDO, 1.9V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA1A	-	XC6219A10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA1B	-	XC6219A11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA1C	-	XC6219A12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA1D	-	XC6219A13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA1E	-	XC6219A14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA1F	-	XC6219A15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA1H	-	XC6219A16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA1K	-	XC6219A17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA1L	-	XC6219A18ADR	LVR-IC	LDO, 1.85V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA1M	-	XC6219A19ADR	LVR-IC	LDO, 1.95V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA20	-	XC6219A202DR	LVR-IC	LDO, 2.0V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA20A	-	XC6219A20ADR	LVR-IC	LDO, 2.05V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA21	-	XC6219A212DR	LVR-IC	LDO, 2.1V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA22	-	XC6219A222DR	LVR-IC	LDO, 2.2V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA23	-	XC6219A232DR	LVR-IC	LDO, 2.3V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA24	-	XC6219A242DR	LVR-IC	LDO, 2.4V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA25	-	XC6219A252DR	LVR-IC	LDO, 2.5V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA26	-	XC6219A262DR	LVR-IC	LDO, 2.6V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA27	-	XC6219A272DR	LVR-IC	LDO, 2.7V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA28	-	XC6219A282DR	LVR-IC	LDO, 2.8V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA29	-	XC6219A292DR	LVR-IC	LDO, 2.9V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA2B	-	XC6219A21ADR	LVR-IC	LDO, 2.15V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA2C	-	XC6219A22ADR	LVR-IC	LDO, 2.25V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA2D	-	XC6219A23ADR	LVR-IC	LDO, 2.35V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA2E	-	XC6219A24ADR	LVR-IC	LDO, 2.45V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA2F	-	XC6219A25ADR	LVR-IC	LDO, 2.55V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA2H	-	XC6219A26ADR	LVR-IC	LDO, 2.65V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA2K	-	XC6219A27ADR	LVR-IC	LDO, 2.75V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA2L	-	XC6219A28ADR	LVR-IC	LDO, 2.85V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA2M	-	XC6219A29ADR	LVR-IC	LDO, 2.95V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA30	-	XC6219A302DR	LVR-IC	LDO, 3.0V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA31	-	XC6219A312DR	LVR-IC	LDO, 3.1V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA32	-	XC6219A322DR	LVR-IC	LDO, 3.2V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA33	-	XC6219A332DR	LVR-IC	LDO, 3.3V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA34	-	XC6219A342DR	LVR-IC	LDO, 3.4V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA35	-	XC6219A352DR	LVR-IC	LDO, 3.5V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA36	-	XC6219A362DR	LVR-IC	LDO, 3.6V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA37	-	XC6219A372DR	LVR-IC	LDO, 3.7V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA38	-	XC6219A382DR	LVR-IC	LDO, 3.8V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA39	-	XC6219A392DR	LVR-IC	LDO, 3.9V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA3A	-	XC6219A30ADR	LVR-IC	LDO, 3.05V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA3B	-	XC6219A31ADR	LVR-IC	LDO, 3.15V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA3C	-	XC6219A32ADR	LVR-IC	LDO, 3.25V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA3D	-	XC6219A33ADR	LVR-IC	LDO, 3.35V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA3E	-	XC6219A34ADR	LVR-IC	LDO, 3.45V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA3F	-	XC6219A35ADR	LVR-IC	LDO, 3.55V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA3H	-	XC6219A36ADR	LVR-IC	LDO, 3.65V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA3K	-	XC6219A37ADR	LVR-IC	LDO, 3.75V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA3L	-	XC6219A38ADR	LVR-IC	LDO, 3.85V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA3M	-	XC6219A39ADR	LVR-IC	LDO, 3.95V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA40	-	XC6219A402DR	LVR-IC	LDO, 4.0V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA41	-	XC6219A412DR	LVR-IC	LDO, 4.1V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA42	-	XC6219A422DR	LVR-IC	LDO, 4.2V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA43	-	XC6219A432DR	LVR-IC	LDO, 4.3V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA44	-	XC6219A442DR	LVR-IC	LDO, 4.4V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA45	-	XC6219A452DR	LVR-IC	LDO, 4.5V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA46	-	XC6219A462DR	LVR-IC	LDO, 4.6V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA47	-	XC6219A472DR	LVR-IC	LDO, 4.7V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA48	-	XC6219A482DR	LVR-IC	LDO, 4.8V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA49	-	XC6219A492DR	LVR-IC	LDO, 4.9V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA4A	-	XC6219A40ADR	LVR-IC	LDO, 4.05V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA4B	-	XC6219A41ADR	LVR-IC	LDO, 4.15V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA4C	-	XC6219A42ADR	LVR-IC	LDO, 4.25V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA4D	-	XC6219A43ADR	LVR-IC	LDO, 4.35V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA4E	-	XC6219A44ADR	LVR-IC	LDO, 4.45V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA4F	-	XC6219A45ADR	LVR-IC	LDO, 4.55V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA4H	-	XC6219A46ADR	LVR-IC	LDO, 4.65V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LA4K	-	XC6219A47ADR	LVR-IC	LDO, 4.75V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA4L	-	XC6219A48ADR	LVR-IC	LDO, 4.85V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA4M	-	XC6219A49ADR	LVR-IC	LDO, 4.95V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA50	-	XC6219A502DR	LVR-IC	LDO, 5.0V±2%, 240mA, +CE, PDR	USP-6B	49hq	VR4	9b	Tor
LA8	-	XC9236C08C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LA8	-	XC9236C08C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LA8	-	XC9236C08CER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LA9	-	XC9236C09C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LA9	-	XC9236C09C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LA9	-	XC9236C09CER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LAL	-	XC9236C0LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LAL	-	XC9236C0LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LAL	-	XC9236C0LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LAM	-	XC9236C0MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LAM	-	XC9236C0MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LAM	-	XC9236C0MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LB	-	R3116K321C	Vdet-IC	3.2V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LB	-	RP107K111D	LVR-IC	LDO, 1.1V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LB0	-	XC9236C10C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LB0	-	XC9236C10C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LB0	-	XC9236C10CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LB09	-	XC6219B092DR	LVR-IC	LDO, 0.9V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB0M	-	XC6219B09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB1	-	XC9236C11C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LB1	-	XC9236C11C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LB1	-	XC9236C11CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LB10	-	XC6219B102DR	LVR-IC	LDO, 1.0V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB11	-	XC6219B112DR	LVR-IC	LDO, 1.1V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB12	-	XC6219B122DR	LVR-IC	LDO, 1.2V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB13	-	XC6219B132DR	LVR-IC	LDO, 1.3V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB14	-	XC6219B142DR	LVR-IC	LDO, 1.4V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB15	-	XC6219B152DR	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB16	-	XC6219B162DR	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB17	-	XC6219B172DR	LVR-IC	LDO, 1.7V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB18	-	XC6219B182DR	LVR-IC	LDO, 1.8V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB19	-	XC6219B192DR	LVR-IC	LDO, 1.9V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB1A	-	XC6219B10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB1B	-	XC6219B11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB1C	-	XC6219B12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB1D	-	XC6219B13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB1E	-	XC6219B14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB1F	-	XC6219B15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB1H	-	XC6219B16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB1K	-	XC6219B17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB1L	-	XC6219B18ADR	LVR-IC	LDO, 1.85V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB1M	-	XC6219B19ADR	LVR-IC	LDO, 1.95V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB2	-	XC9236C12C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LB2	-	XC9236C12C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LB2	-	XC9236C12CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LB2	-	XC9254R001ER	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.2V±2%, 600mA, +CE	USP-6C	49dc5	DC1	9a	Tor
LB20	-	XC6219B202DR	LVR-IC	LDO, 2.0V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB21	-	XC6219B212DR	LVR-IC	LDO, 2.1V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB22	-	XC6219B222DR	LVR-IC	LDO, 2.2V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB23	-	XC6219B232DR	LVR-IC	LDO, 2.3V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB24	-	XC6219B242DR	LVR-IC	LDO, 2.4V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB25	-	XC6219B252DR	LVR-IC	LDO, 2.5V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB26	-	XC6219B262DR	LVR-IC	LDO, 2.6V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB27	-	XC6219B272DR	LVR-IC	LDO, 2.7V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB28	-	XC6219B282DR	LVR-IC	LDO, 2.8V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB29	-	XC6219B292DR	LVR-IC	LDO, 2.9V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB2A	-	XC6219B20ADR	LVR-IC	LDO, 2.05V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB2B	-	XC6219B21ADR	LVR-IC	LDO, 2.15V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB2C	-	XC6219B22ADR	LVR-IC	LDO, 2.25V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB2D	-	XC6219B23ADR	LVR-IC	LDO, 2.35V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB2E	-	XC6219B24ADR	LVR-IC	LDO, 2.45V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB2F	-	XC6219B25ADR	LVR-IC	LDO, 2.55V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB2H	-	XC6219B26ADR	LVR-IC	LDO, 2.65V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB2K	-	XC6219B27ADR	LVR-IC	LDO, 2.75V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB2L	-	XC6219B28ADR	LVR-IC	LDO, 2.85V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB2M	-	XC6219B29ADR	LVR-IC	LDO, 2.95V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LB3	-	XC9236C13C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LB3	-	XC9236C13C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LB3	-	XC9236C13CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LB30	-	XC6219B302DR	LVR-IC	LDO, 3.0V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB31	-	XC6219B312DR	LVR-IC	LDO, 3.1V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB32	-	XC6219B322DR	LVR-IC	LDO, 3.2V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB33	-	XC6219B332DR	LVR-IC	LDO, 3.3V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB34	-	XC6219B342DR	LVR-IC	LDO, 3.4V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB35	-	XC6219B352DR	LVR-IC	LDO, 3.5V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB36	-	XC6219B362DR	LVR-IC	LDO, 3.6V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB37	-	XC6219B372DR	LVR-IC	LDO, 3.7V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB38	-	XC6219B382DR	LVR-IC	LDO, 3.8V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB39	-	XC6219B392DR	LVR-IC	LDO, 3.9V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB3A	-	XC6219B30ADR	LVR-IC	LDO, 3.05V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB3B	-	XC6219B31ADR	LVR-IC	LDO, 3.15V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB3C	-	XC6219B32ADR	LVR-IC	LDO, 3.25V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB3D	-	XC6219B33ADR	LVR-IC	LDO, 3.35V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB3E	-	XC6219B34ADR	LVR-IC	LDO, 3.45V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB3F	-	XC6219B35ADR	LVR-IC	LDO, 3.55V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB3H	-	XC6219B36ADR	LVR-IC	LDO, 3.65V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB3K	-	XC6219B37ADR	LVR-IC	LDO, 3.75V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB3L	-	XC6219B38ADR	LVR-IC	LDO, 3.85V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB3M	-	XC6219B39ADR	LVR-IC	LDO, 3.95V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB4	-	XC9236C14C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LB4	-	XC9236C14C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LB4	-	XC9236C14CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LB40	-	XC6219B402DR	LVR-IC	LDO, 4.0V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB41	-	XC6219B412DR	LVR-IC	LDO, 4.1V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB42	-	XC6219B422DR	LVR-IC	LDO, 4.2V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB43	-	XC6219B432DR	LVR-IC	LDO, 4.3V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB44	-	XC6219B442DR	LVR-IC	LDO, 4.4V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB45	-	XC6219B452DR	LVR-IC	LDO, 4.5V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB46	-	XC6219B462DR	LVR-IC	LDO, 4.6V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB47	-	XC6219B472DR	LVR-IC	LDO, 4.7V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB48	-	XC6219B482DR	LVR-IC	LDO, 4.8V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB49	-	XC6219B492DR	LVR-IC	LDO, 4.9V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB4A	-	XC6219B40ADR	LVR-IC	LDO, 4.05V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB4B	-	XC6219B41ADR	LVR-IC	LDO, 4.15V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB4C	-	XC6219B42ADR	LVR-IC	LDO, 4.25V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB4D	-	XC6219B43ADR	LVR-IC	LDO, 4.35V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB4E	-	XC6219B44ADR	LVR-IC	LDO, 4.45V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB4F	-	XC6219B45ADR	LVR-IC	LDO, 4.55V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB4H	-	XC6219B46ADR	LVR-IC	LDO, 4.65V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB4K	-	XC6219B47ADR	LVR-IC	LDO, 4.75V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB4L	-	XC6219B48ADR	LVR-IC	LDO, 4.85V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB4M	-	XC6219B49ADR	LVR-IC	LDO, 4.95V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB5	-	XC9236C15C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LB5	-	XC9236C15C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LB5	-	XC9236C15CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LB50	-	XC6219B502DR	LVR-IC	LDO, 5.0V±2%, 240mA, +CE	USP-6B	49hq	VR4	9b	Tor
LB6	-	XC9236C16C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LB6	-	XC9236C16C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LB6	-	XC9236C16CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LB7	-	XC9236C17C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LB7	-	XC9236C17C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LB7	-	XC9236C17CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LB8	-	XC9236C18C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LB8	-	XC9236C18C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LB8	-	XC9236C18CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LB9	-	XC9236C19C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LB9	-	XC9236C19C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LB9	-	XC9236C19CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LBA	-	XC9236C1AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LBA	-	XC9236C1AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LBA	-	XC9236C1ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LBB	-	XC9236C1BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LBB	-	XC9236C1BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LBB	-	XC9236C1BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LBC	-	XC9236C1CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LBC	-	XC9236C1CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LBC	-	XC9236C1CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LBD	-	XC9236C1DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LBD	-	XC9236C1DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LBD	-	XC9236C1DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LBE	-	XC9236C1EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LBE	-	XC9236C1EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LBE	-	XC9236C1ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LBF	-	XC9236C1FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LBF	-	XC9236C1FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LBF	-	XC9236C1FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LBH	-	XC9236C1HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LBH	-	XC9236C1HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LBH	-	XC9236C1HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LBK	-	XC9236C1KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LBK	-	XC9236C1KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LBK	-	XC9236C1KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LBL	-	XC9236C1LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LBL	-	XC9236C1LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LBL	-	XC9236C1LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LBM	-	XC9236C1MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LBM	-	XC9236C1MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LBM	-	XC9236C1MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LC	-	R3116K331C	Vdet-IC	3.3V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LC	-	RP107K121D	LVR-IC	LDO, 1.2V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LC0	-	XC9236C20C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LC0	-	XC9236C20C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LC0	-	XC9236C20CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LC09	-	XC6219C092DR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC0M	-	XC6219C09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC1	-	XC9236C21C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LC1	-	XC9236C21C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LC1	-	XC9236C21CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LC10	-	XC6219C102DR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC11	-	XC6219C112DR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC12	-	XC6219C122DR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC13	-	XC6219C132DR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC14	-	XC6219C142DR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC15	-	XC6219C152DR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC16	-	XC6219C162DR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC17	-	XC6219C172DR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC18	-	XC6219C182DR	LVR-IC	LDO, 1.8V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC19	-	XC6219C192DR	LVR-IC	LDO, 1.9V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC1A	-	XC6219C10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC1B	-	XC6219C11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC1C	-	XC6219C12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC1D	-	XC6219C13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC1E	-	XC6219C14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC1F	-	XC6219C15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC1H	-	XC6219C16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC1K	-	XC6219C17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC1L	-	XC6219C18ADR	LVR-IC	LDO, 1.85V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC1M	-	XC6219C19ADR	LVR-IC	LDO, 1.95V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC2	-	XC9236C22C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LC2	-	XC9236C22C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LC2	-	XC9236C22CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LC20	-	XC6219C202DR	LVR-IC	LDO, 2.0V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC21	-	XC6219C212DR	LVR-IC	LDO, 2.1V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC22	-	XC6219C222DR	LVR-IC	LDO, 2.2V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC23	-	XC6219C232DR	LVR-IC	LDO, 2.3V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC24	-	XC6219C242DR	LVR-IC	LDO, 2.4V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC25	-	XC6219C252DR	LVR-IC	LDO, 2.5V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC26	-	XC6219C262DR	LVR-IC	LDO, 2.6V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC27	-	XC6219C272DR	LVR-IC	LDO, 2.7V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC28	-	XC6219C282DR	LVR-IC	LDO, 2.8V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC29	-	XC6219C292DR	LVR-IC	LDO, 2.9V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC2A	-	XC6219C20ADR	LVR-IC	LDO, 2.05V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC2B	-	XC6219C21ADR	LVR-IC	LDO, 2.15V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC2C	-	XC6219C22ADR	LVR-IC	LDO, 2.25V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC2D	-	XC6219C23ADR	LVR-IC	LDO, 2.35V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC2E	-	XC6219C24ADR	LVR-IC	LDO, 2.45V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LC2F	-	XC6219C25ADR	LVR-IC	LDO, 2.55V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC2H	-	XC6219C26ADR	LVR-IC	LDO, 2.65V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC2K	-	XC6219C27ADR	LVR-IC	LDO, 2.75V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC2L	-	XC6219C28ADR	LVR-IC	LDO, 2.85V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC2M	-	XC6219C29ADR	LVR-IC	LDO, 2.95V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC3	-	XC9236C23C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LC3	-	XC9236C23C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LC3	-	XC9236C23CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LC30	-	XC6219C302DR	LVR-IC	LDO, 3.0V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC31	-	XC6219C312DR	LVR-IC	LDO, 3.1V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC32	-	XC6219C322DR	LVR-IC	LDO, 3.2V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC33	-	XC6219C332DR	LVR-IC	LDO, 3.3V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC34	-	XC6219C342DR	LVR-IC	LDO, 3.4V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC35	-	XC6219C352DR	LVR-IC	LDO, 3.5V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC36	-	XC6219C362DR	LVR-IC	LDO, 3.6V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC37	-	XC6219C372DR	LVR-IC	LDO, 3.7V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC38	-	XC6219C382DR	LVR-IC	LDO, 3.8V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC39	-	XC6219C392DR	LVR-IC	LDO, 3.9V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC3A	-	XC6219C30ADR	LVR-IC	LDO, 3.05V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC3B	-	XC6219C31ADR	LVR-IC	LDO, 3.15V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC3C	-	XC6219C32ADR	LVR-IC	LDO, 3.25V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC3D	-	XC6219C33ADR	LVR-IC	LDO, 3.35V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC3E	-	XC6219C34ADR	LVR-IC	LDO, 3.45V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC3F	-	XC6219C35ADR	LVR-IC	LDO, 3.55V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC3H	-	XC6219C36ADR	LVR-IC	LDO, 3.65V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC3K	-	XC6219C37ADR	LVR-IC	LDO, 3.75V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC3L	-	XC6219C38ADR	LVR-IC	LDO, 3.85V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC3M	-	XC6219C39ADR	LVR-IC	LDO, 3.95V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC4	-	XC9236C24C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LC4	-	XC9236C24C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LC4	-	XC9236C24CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LC40	-	XC6219C402DR	LVR-IC	LDO, 4.0V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC41	-	XC6219C412DR	LVR-IC	LDO, 4.1V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC42	-	XC6219C422DR	LVR-IC	LDO, 4.2V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC43	-	XC6219C432DR	LVR-IC	LDO, 4.3V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC44	-	XC6219C442DR	LVR-IC	LDO, 4.4V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC45	-	XC6219C452DR	LVR-IC	LDO, 4.5V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC46	-	XC6219C462DR	LVR-IC	LDO, 4.6V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC47	-	XC6219C472DR	LVR-IC	LDO, 4.7V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC48	-	XC6219C482DR	LVR-IC	LDO, 4.8V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC49	-	XC6219C492DR	LVR-IC	LDO, 4.9V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC4A	-	XC6219C40ADR	LVR-IC	LDO, 4.05V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC4B	-	XC6219C41ADR	LVR-IC	LDO, 4.15V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC4C	-	XC6219C42ADR	LVR-IC	LDO, 4.25V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC4D	-	XC6219C43ADR	LVR-IC	LDO, 4.35V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC4E	-	XC6219C44ADR	LVR-IC	LDO, 4.45V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC4F	-	XC6219C45ADR	LVR-IC	LDO, 4.55V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC4H	-	XC6219C46ADR	LVR-IC	LDO, 4.65V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC4K	-	XC6219C47ADR	LVR-IC	LDO, 4.75V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC4L	-	XC6219C48ADR	LVR-IC	LDO, 4.85V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC4M	-	XC6219C49ADR	LVR-IC	LDO, 4.95V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC5	-	XC9236C25C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LC5	-	XC9236C25C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LC5	-	XC9236C25CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LC50	-	XC6219C502DR	LVR-IC	LDO, 5.0V±2%, 240mA, -CE, PUR	USP-6B	49hq	VR4	9b	Tor
LC6	-	XC9236C26C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LC6	-	XC9236C26C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LC6	-	XC9236C26CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LC7	-	XC9236C27C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LC7	-	XC9236C27C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LC7	-	XC9236C27CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LC8	-	XC9236C28C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LC8	-	XC9236C28C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LC8	-	XC9236C28CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LC9	-	XC9236C29C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LC9	-	XC9236C29C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LC9	-	XC9236C29CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LCA	-	XC9236C2AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LCA	-	XC9236C2AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LCA	-	XC9236C2ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LCB	-	XC9236C2BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LCB	-	XC9236C2BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LCB	-	XC9236C2BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LCC	-	XC9236C2CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LCC	-	XC9236C2CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LCC	-	XC9236C2CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LCD	-	XC9236C2DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LCD	-	XC9236C2DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LCD	-	XC9236C2DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LCE	-	XC9236C2EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LCE	-	XC9236C2EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LCE	-	XC9236C2ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LCF	-	XC9236C2FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LCF	-	XC9236C2FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LCF	-	XC9236C2FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LCH	-	XC9236C2HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LCH	-	XC9236C2HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LCH	-	XC9236C2HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LCK	-	XC9236C2KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LCK	-	XC9236C2KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LCK	-	XC9236C2KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LCL	-	XC9236C2LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LCL	-	XC9236C2LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LCL	-	XC9236C2LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LCM	-	XC9236C2MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LCM	-	XC9236C2MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LCM	-	XC9236C2MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LD	-	R3116K341C	Vdet-IC	3.4V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LD	-	RP107K131D	LVR-IC	LDO, 1.3V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LD0	-	XC9236C30C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LD0	-	XC9236C30C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LD0	-	XC9236C30CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LD09	-	XC6219D092DR	LVR-IC	LDO, 0.9V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD0M	-	XC6219D09ADR	LVR-IC	LDO, 0.95V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD1	-	XC9236C31C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LD1	-	XC9236C31C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LD1	-	XC9236C31CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LD10	-	XC6219D102DR	LVR-IC	LDO, 1.0V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD11	-	XC6219D112DR	LVR-IC	LDO, 1.1V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD12	-	XC6219D122DR	LVR-IC	LDO, 1.2V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD13	-	XC6219D132DR	LVR-IC	LDO, 1.3V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD14	-	XC6219D142DR	LVR-IC	LDO, 1.4V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD15	-	XC6219D152DR	LVR-IC	LDO, 1.5V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD16	-	XC6219D162DR	LVR-IC	LDO, 1.6V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD17	-	XC6219D172DR	LVR-IC	LDO, 1.7V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD18	-	XC6219D182DR	LVR-IC	LDO, 1.8V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD19	-	XC6219D192DR	LVR-IC	LDO, 1.9V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD1A	-	XC6219D10ADR	LVR-IC	LDO, 1.05V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD1B	-	XC6219D11ADR	LVR-IC	LDO, 1.15V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD1C	-	XC6219D12ADR	LVR-IC	LDO, 1.25V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD1D	-	XC6219D13ADR	LVR-IC	LDO, 1.35V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD1E	-	XC6219D14ADR	LVR-IC	LDO, 1.45V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD1F	-	XC6219D15ADR	LVR-IC	LDO, 1.55V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD1H	-	XC6219D16ADR	LVR-IC	LDO, 1.65V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD1K	-	XC6219D17ADR	LVR-IC	LDO, 1.75V±2%, 150mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD1L	-	XC6219D18ADR	LVR-IC	LDO, 1.85V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD1M	-	XC6219D19ADR	LVR-IC	LDO, 1.95V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD2	-	XC9236C32C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LD2	-	XC9236C32C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LD2	-	XC9236C32CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LD20	-	XC6219D202DR	LVR-IC	LDO, 2.0V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD21	-	XC6219D212DR	LVR-IC	LDO, 2.1V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD22	-	XC6219D222DR	LVR-IC	LDO, 2.2V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD23	-	XC6219D232DR	LVR-IC	LDO, 2.3V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD24	-	XC6219D242DR	LVR-IC	LDO, 2.4V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD25	-	XC6219D252DR	LVR-IC	LDO, 2.5V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD26	-	XC6219D262DR	LVR-IC	LDO, 2.6V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD27	-	XC6219D272DR	LVR-IC	LDO, 2.7V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD28	-	XC6219D282DR	LVR-IC	LDO, 2.8V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD29	-	XC6219D292DR	LVR-IC	LDO, 2.9V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LD2A	-	XC6219D20ADR	LVR-IC	LDO, 2.05V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD2B	-	XC6219D21ADR	LVR-IC	LDO, 2.15V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD2C	-	XC6219D22ADR	LVR-IC	LDO, 2.25V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD2D	-	XC6219D23ADR	LVR-IC	LDO, 2.35V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD2E	-	XC6219D24ADR	LVR-IC	LDO, 2.45V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD2F	-	XC6219D25ADR	LVR-IC	LDO, 2.55V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD2H	-	XC6219D26ADR	LVR-IC	LDO, 2.65V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD2K	-	XC6219D27ADR	LVR-IC	LDO, 2.75V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD2L	-	XC6219D28ADR	LVR-IC	LDO, 2.85V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD2M	-	XC6219D29ADR	LVR-IC	LDO, 2.95V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD3	-	XC9236C33C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LD3	-	XC9236C33C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LD3	-	XC9236C33CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LD30	-	XC6219D302DR	LVR-IC	LDO, 3.0V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD31	-	XC6219D312DR	LVR-IC	LDO, 3.1V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD32	-	XC6219D322DR	LVR-IC	LDO, 3.2V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD33	-	XC6219D332DR	LVR-IC	LDO, 3.3V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD34	-	XC6219D342DR	LVR-IC	LDO, 3.4V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD35	-	XC6219D352DR	LVR-IC	LDO, 3.5V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD36	-	XC6219D362DR	LVR-IC	LDO, 3.6V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD37	-	XC6219D372DR	LVR-IC	LDO, 3.7V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD38	-	XC6219D382DR	LVR-IC	LDO, 3.8V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD39	-	XC6219D392DR	LVR-IC	LDO, 3.9V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD3A	-	XC6219D30ADR	LVR-IC	LDO, 3.05V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD3B	-	XC6219D31ADR	LVR-IC	LDO, 3.15V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD3C	-	XC6219D32ADR	LVR-IC	LDO, 3.25V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD3D	-	XC6219D33ADR	LVR-IC	LDO, 3.35V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD3E	-	XC6219D34ADR	LVR-IC	LDO, 3.45V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD3F	-	XC6219D35ADR	LVR-IC	LDO, 3.55V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD3H	-	XC6219D36ADR	LVR-IC	LDO, 3.65V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD3K	-	XC6219D37ADR	LVR-IC	LDO, 3.75V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD3L	-	XC6219D38ADR	LVR-IC	LDO, 3.85V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD3M	-	XC6219D39ADR	LVR-IC	LDO, 3.95V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD4	-	XC9236C34C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LD4	-	XC9236C34C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LD4	-	XC9236C34CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LD40	-	XC6219D402DR	LVR-IC	LDO, 4.0V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD41	-	XC6219D412DR	LVR-IC	LDO, 4.1V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD42	-	XC6219D422DR	LVR-IC	LDO, 4.2V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD43	-	XC6219D432DR	LVR-IC	LDO, 4.3V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD44	-	XC6219D442DR	LVR-IC	LDO, 4.4V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD45	-	XC6219D452DR	LVR-IC	LDO, 4.5V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD46	-	XC6219D462DR	LVR-IC	LDO, 4.6V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD47	-	XC6219D472DR	LVR-IC	LDO, 4.7V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD48	-	XC6219D482DR	LVR-IC	LDO, 4.8V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD49	-	XC6219D492DR	LVR-IC	LDO, 4.9V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD4A	-	XC6219D40ADR	LVR-IC	LDO, 4.05V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD4B	-	XC6219D41ADR	LVR-IC	LDO, 4.15V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD4C	-	XC6219D42ADR	LVR-IC	LDO, 4.25V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD4D	-	XC6219D43ADR	LVR-IC	LDO, 4.35V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD4E	-	XC6219D44ADR	LVR-IC	LDO, 4.45V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD4F	-	XC6219D45ADR	LVR-IC	LDO, 4.55V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD4H	-	XC6219D46ADR	LVR-IC	LDO, 4.65V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD4K	-	XC6219D47ADR	LVR-IC	LDO, 4.75V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD4L	-	XC6219D48ADR	LVR-IC	LDO, 4.85V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD4M	-	XC6219D49ADR	LVR-IC	LDO, 4.95V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD5	-	XC9236C35C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LD5	-	XC9236C35C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LD5	-	XC9236C35CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LD50	-	XC6219D502DR	LVR-IC	LDO, 5.0V±2%, 240mA, -CE	USP-6B	49hq	VR4	9b	Tor
LD6	-	XC9236C36C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LD6	-	XC9236C36C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LD6	-	XC9236C36CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LD7	-	XC9236C37C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LD7	-	XC9236C37C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LD7	-	XC9236C37CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LD8	-	XC9236C38C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LD8	-	XC9236C38C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LD8	-	XC9236C38CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LD9	-	XC9236C39C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LD9	-	XC9236C39C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LD9	-	XC9236C39CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LDA	-	XC9236C3AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LDA	-	XC9236C3AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LDA	-	XC9236C3ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LDB	-	XC9236C3BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LDB	-	XC9236C3BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LDB	-	XC9236C3BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LDC	-	XC9236C3CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LDC	-	XC9236C3CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LDC	-	XC9236C3CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LDD	-	XC9236C3DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LDD	-	XC9236C3DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LDD	-	XC9236C3DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LDE	-	XC9236C3EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LDE	-	XC9236C3EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LDE	-	XC9236C3ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LDF	-	XC9236C3FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LDF	-	XC9236C3FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LDF	-	XC9236C3FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LDH	-	XC9236C3HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LDH	-	XC9236C3HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LDH	-	XC9236C3HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LDK	-	XC9236C3KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LDK	-	XC9236C3KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LDK	-	XC9236C3KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LDL	-	XC9236C3LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LDL	-	XC9236C3LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LDL	-	XC9236C3LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LDM	-	XC9236C3MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LDM	-	XC9236C3MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LDM	-	XC9236C3MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LE	-	R3116K351C	Vdet-IC	3.5V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LE	-	RP107K141D	LVR-IC	LDO, 1.4V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LE0	-	XC9236C40C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LE0	-	XC9236C40C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LE0	-	XC9236C40CER-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LE6	-	ADP122ACPZ-2.5-R7	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	CP-6-3	56ep	VR4	9a	Ad
LEA	-	ADP122ACPZ-2.8-R7	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	CP-6-3	56ep	VR4	9a	Ad
LED	-	NCP500SN18T1	LVR-IC	LDO, LN, +CE, 1.8V±2.5%, 150mA	LLP-6	56ve	VR4	9i	Ons
LEE	-	ADP122ACPZ-3.0-R7	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	CP-6-3	56ep	VR4	9a	Ad
LEE	-	NCP500SN25T1	LVR-IC	LDO, LN, +CE, 2.5V±2.5%, 150mA	LLP-6	56ve	VR4	9i	Ons
LEF	-	ADP122ACPZ-3.3-R7	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	CP-6-3	56ep	VR4	9a	Ad
LEF	-	NCP500SN27T1	LVR-IC	LDO, LN, +CE, 2.7V±2.5%, 150mA	LLP-6	56ve	VR4	9i	Ons
LEG	-	ADP123ACPZ-R7	LVR-IC	LDO, Adjustable 0.8..5.0V±1%, 300mA, +CE	CP-6-3	56e6	VR5	9a	Ad
LEG	-	NCP500SN28T1	LVR-IC	LDO, LN, +CE, 2.8V±2.5%, 150mA	LLP-6	56ve	VR4	9i	Ons
LEH	-	NCP500SN30T1	LVR-IC	LDO, LN, +CE, 3V±2.5%, 150mA	LLP-6	56ve	VR4	9i	Ons
LEJ	-	NCP500SN33T1	LVR-IC	LDO, LN, +CE, 3.3V±2.5%, 150mA	LLP-6	56ve	VR4	9i	Ons
LEK	-	NCP500SN50T1	LVR-IC	LDO, LN, +CE, 5V±2.5%, 150mA	LLP-6	56ve	VR4	9i	Ons
LF	-	R3116K361C	Vdet-IC	3.6V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LF	-	RP107K151D	LVR-IC	LDO, 1.5V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LF8	-	XC9236C08D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LF8	-	XC9236C08D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LF8	-	XC9236C08DER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LF8	-	XCL206C083AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 0.8V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LF9	-	XC9236C09D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LF9	-	XC9236C09D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LF9	-	XC9236C09DER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LF9	-	XCL206C093AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 0.9V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LFL	-	XC9236C0LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LFL	-	XC9236C0LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LFL	-	XC9236C0LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LFL	-	XCL206C0L3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 0.85V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LFM	-	XC9236C0MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LFM	-	XC9236C0MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LFM	-	XC9236C0MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LFM	-	XCL206C0M3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 0.95V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LG	-	MIC2211-2.7/1.8BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(150mA)/1.8V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
LG	-	R3116K371C	Vdet-IC	3.7V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LG	-	RP107K161D	LVR-IC	LDO, 1.6V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LH	-	LD6805K/23H	LVR-IC	LDO, 2.3V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
LH	-	R3116K381C	Vdet-IC	3.8V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LH	-	RP107K171D	LVR-IC	LDO, 1.7V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LH0	-	XC9236C10D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LH0	-	XC9236C10D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LH0	-	XC9236C10DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LH0	-	XCL206C103AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.0V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LH1	-	XC9236C11D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LH1	-	XC9236C11D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LH1	-	XC9236C11DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LH1	-	XCL206C113AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.1V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LH2	-	XC9236C12D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LH2	-	XC9236C12D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LH2	-	XC9236C12DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LH2	-	XCL206C123AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.2V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LH3	-	XC9236C13D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LH3	-	XC9236C13D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LH3	-	XC9236C13DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LH3	-	XCL206C133AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.3V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LH4	-	XC9236C14D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LH4	-	XC9236C14D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LH4	-	XC9236C14DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LH4	-	XCL206C143AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.4V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LH5	-	XC9236C15D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LH5	-	XC9236C15D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LH5	-	XC9236C15DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LH5	-	XCL206C153AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.5V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LH6	-	XC9236C16D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LH6	-	XC9236C16D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LH6	-	XC9236C16DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LH6	-	XCL206C163AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.6V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LH7	-	XC9236C17D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LH7	-	XC9236C17D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LH7	-	XC9236C17DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LH7	-	XCL206C173AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.7V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LH8	-	XC9236C18D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LH8	-	XC9236C18D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LH8	-	XC9236C18DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LH8	-	XCL206C183AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.8V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LH9	-	XC9236C19D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LH9	-	XC9236C19D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LH9	-	XC9236C19DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LH9	-	XCL206C193AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.9V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LHA	-	XC9236C1AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LHA	-	XC9236C1AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LHA	-	XC9236C1ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LHA	-	XCL206C1A3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.05V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LHB	-	XC9236C1BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LHB	-	XC9236C1BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LHB	-	XC9236C1BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LHB	-	XCL206C1B3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.15V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LHC	-	XC9236C1CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LHC	-	XC9236C1CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LHC	-	XC9236C1CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LHC	-	XCL206C1C3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.25V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LHD	-	XC9236C1DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LHD	-	XC9236C1DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LHD	-	XC9236C1DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LHD	-	XCL206C1D3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.35V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LHE	-	XC9236C1ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LHE	-	XC9236C1ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LHE	-	XC9236C1EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LHE	-	XCL206C1E3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.45V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LHF	-	XC9236C1FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LHF	-	XC9236C1FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LHF	-	XC9236C1FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LHF	-	XCL206C1F3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.55V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LHH	-	XC9236C1HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LHH	-	XC9236C1HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LHH	-	XC9236C1HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LHH	-	XCL206C1H3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.65V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LHK	-	XC9236C1KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LHK	-	XC9236C1KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LHK	-	XC9236C1KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LHK	-	XCL206C1K3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.75V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LHL	-	XC9236C1LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LHL	-	XC9236C1LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LHL	-	XC9236C1LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LHL	-	XCL206C1L3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.85V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LHM	-	XC9236C1MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LHM	-	XC9236C1MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LHM	-	XC9236C1MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LHM	-	XCL206C1M3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 1.95V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LJ	-	R3116K391C	Vdet-IC	3.9V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LJ	-	RP107K181D	LVR-IC	LDO, 1.8V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LJ	-	SDM10U45LP	Si-diode	Schottky, 45V, 100mA, Vf<800mV(100mA)	DFN1006-2	13d	-	2a	Di
LJS	-	ADP122ACPZ-1.8-R7	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	CP-6-3	56ep	VR4	9a	Ad
LJT	-	ADP122ACPZ-2.0-R7	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	CP-6-3	56ep	VR4	9a	Ad
LJU	-	ADP122ACPZ-2.6-R7	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	CP-6-3	56ep	VR4	9a	Ad
LK	-	R3116K401C	Vdet-IC	4.0V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LK	-	RP107K191D	LVR-IC	LDO, 1.9V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LK0	-	XC9236C20D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LK0	-	XC9236C20D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LK0	-	XC9236C20DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LK0	-	XCL206C203AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.0V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LK1	-	XC9236C21D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LK1	-	XC9236C21D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LK1	-	XC9236C21DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LK1	-	XCL206C213AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.1V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LK2	-	XC9236C22D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LK2	-	XC9236C22D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LK2	-	XC9236C22DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LK2	-	XCL206C223AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.2V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LK3	-	XC9236C23D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LK3	-	XC9236C23D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LK3	-	XC9236C23DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LK3	-	XCL206C233AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.3V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LK4	-	XC9236C24D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LK4	-	XC9236C24D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LK4	-	XC9236C24DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LK4	-	XCL206C243AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.4V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LK5	-	XC9236C25D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LK5	-	XC9236C25D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LK5	-	XC9236C25DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LK5	-	XCL206C253AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.5V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LK6	-	XC9236C26D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LK6	-	XC9236C26D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LK6	-	XC9236C26DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LK6	-	XCL206C263AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.6V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LK7	-	XC9236C27D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LK7	-	XC9236C27D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LK7	-	XC9236C27DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LK7	-	XCL206C273AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.7V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LK8	-	XC9236C28D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LK8	-	XC9236C28D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LK8	-	XC9236C28DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LK8	-	XCL206C283AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.8V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LK9	-	XC9236C29D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LK9	-	XC9236C29D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LK9	-	XC9236C29DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LK9	-	XCL206C293AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.9V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LKA	-	XC9236C2AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LKA	-	XC9236C2AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LKA	-	XC9236C2ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LKA	-	XCL206C2A3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.05V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LKB	-	XC9236C2BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LKB	-	XC9236C2BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LKB	-	XC9236C2BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LKB	-	XCL206C2B3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.15V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LKC	-	XC9236C2CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LKC	-	XC9236C2CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LKC	-	XC9236C2CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LKC	-	XCL206C2C3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.25V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LKD	-	XC9236C2DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LKD	-	XC9236C2DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LKD	-	XC9236C2DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LKD	-	XCL206C2D3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.35V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LKE	-	XC9236C2ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LKE	-	XC9236C2ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LKE	-	XC9236C2EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LKE	-	XCL206C2E3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.45V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LKF	-	XC9236C2FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LKF	-	XC9236C2FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LKF	-	XC9236C2FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LKF	-	XCL206C2F3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.55V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LKH	-	XC9236C2HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LKH	-	XC9236C2HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LKH	-	XC9236C2HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LKH	-	XCL206C2H3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.65V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LKK	-	XC9236C2KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LKK	-	XC9236C2KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LKK	-	XC9236C2KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LKK	-	XCL206C2K3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.75V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LKL	-	XC9236C2LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LKL	-	XC9236C2LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LKL	-	XC9236C2LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LKL	-	XCL206C2L3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.85V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LKM	-	XC9236C2MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LKM	-	XC9236C2MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LKM	-	XC9236C2MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LKM	-	XCL206C2M3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 2.95V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LL	-	BBY53-02L	C-diode	VCO-tuning, 6V, 20mA, 3.1..5.8pF(3..1V)	TSLP2-1	13d	-	2b	Sie
LL	-	GSI8010AQ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.5W(5V/4Ω), shutdown	DFN-8	92	AFP24	9a	Go2
LL	-	GSI8010AW	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.5W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Go2
LL	-	R3116K411C	Vdet-IC	4.1V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LL	-	RP107K201D	LVR-IC	LDO, 2.0V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LL0	-	XC9236C30D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LL0	-	XC9236C30D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LL0	-	XC9236C30DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LL0	-	XCL206C303AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.0V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LL1	-	XC9236C31D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LL1	-	XC9236C31D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LL1	-	XC9236C31DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LL1	-	XCL206C313AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.1V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LL2	-	XC9236C32D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LL2	-	XC9236C32D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LL2	-	XC9236C32DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LL2	-	XCL206C323AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.2V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LL3	-	XC9236C33D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LL3	-	XC9236C33D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LL3	-	XC9236C33DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LL3	-	XCL206C333AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.3V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LL4	-	XC9236C34D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LL4	-	XC9236C34D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LL4	-	XC9236C34DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LL4	-	XCL206C343AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.4V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LL5	-	XC9236C35D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LL5	-	XC9236C35D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LL5	-	XC9236C35DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LL5	-	XCL206C353AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.5V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LL6	-	XC9236C36D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LL6	-	XC9236C36D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LL6	-	XC9236C36DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LL6	-	XCL206C363AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.6V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LL7	-	XC9236C37D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LL7	-	XC9236C37D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LL7	-	XC9236C37DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LL7	-	XCL206C373AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.7V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LL8	-	XC9236C38D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LL8	-	XC9236C38D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LL8	-	XC9236C38DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LL8	-	XCL206C383AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.8V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LL9	-	XC9236C39D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LL9	-	XC9236C39D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LL9	-	XC9236C39DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LL9	-	XCL206C393AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.9V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LLA	-	XC9236C3AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LLA	-	XC9236C3AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LLA	-	XC9236C3ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LLA	-	XCL206C3A3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.05V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LLB	-	XC9236C3BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LLB	-	XC9236C3BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LLB	-	XC9236C3BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LLB	-	XCL206C3B3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.15V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LLC	-	XC9236C3CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LLC	-	XC9236C3CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LLC	-	XC9236C3CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LLC	-	XCL206C3C3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.25V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LLD	-	XC9236C3DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LLD	-	XC9236C3DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LLD	-	XC9236C3DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LLD	-	XCL206C3D3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.35V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LLE	-	XC9236C3ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LLE	-	XC9236C3ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LLE	-	XC9236C3EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LLE	-	XCL206C3E3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.45V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LLF	-	XC9236C3FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LLF	-	XC9236C3FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LLF	-	XC9236C3FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LLF	-	XCL206C3F3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.55V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LLH	-	XC9236C3HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LLH	-	XC9236C3HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LLH	-	XC9236C3HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LLH	-	XCL206C3H3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.65V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LLK	-	XC9236C3KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LLK	-	XC9236C3KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LLK	-	XC9236C3KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LLK	-	XCL206C3K3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.75V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LLL	-	XC9236C3LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LLL	-	XC9236C3LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LLL	-	XC9236C3LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LLL	-	XCL206C3L3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.85V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LLM	-	XC9236C3MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LLM	-	XC9236C3MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LLM	-	XC9236C3MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LLM	-	XCL206C3M3AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 3.95V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LLZ	mb	MIC5310-2.7/2.7YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.7V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
LM	-	R3116K421C	Vdet-IC	4.2V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LM	-	RP107K211D	LVR-IC	LDO, 2.1V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LM	-	SDM20U30LP	Si-diode	Schottky, 30V, 200mA, Vf<575mV(200mA)	DFN1006-2	13d	-	2a	Di
LM0	-	XC9236C40D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
LM0	-	XC9236C40D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
LM0	-	XC9236C40DER-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
LM0	-	XCL206C403AR-G	DC-DC-IC	PWM/PFM step-down, 3MHz, 4.0V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
LN	-	R3116K431C	Vdet-IC	4.3V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LN	-	RP107K221D	LVR-IC	LDO, 2.2V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LN8	-	XC9236D08C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LN8	-	XC9236D08C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LN8	-	XC9236D08CER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LN9	-	XC9236D09C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LN9	-	XC9236D09C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LN9	-	XC9236D09CER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LNL	-	XC9236D0LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LNL	-	XC9236D0LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LNL	-	XC9236D0LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LNM	-	XC9236D0MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LNM	-	XC9236D0MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LNM	-	XC9236D0MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LP	-	LD6805K/23P	LVR-IC	LDO, 2.3V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
LP	-	MIC2211-2.7/3.0BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V(150mA)/3.0V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LP	-	R3116K441C	Vdet-IC	4.4V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LP	-	RP107K231D	LVR-IC	LDO, 2.3V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LP0	-	XC9236D10C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LP0	-	XC9236D10C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LP0	-	XC9236D10CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LP1	-	XC9236D11C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LP1	-	XC9236D11C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LP1	-	XC9236D11CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LP2	-	XC9236D12C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LP2	-	XC9236D12C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LP2	-	XC9236D12CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LP3	-	XC9236D13C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LP3	-	XC9236D13C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LP3	-	XC9236D13CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LP4	-	XC9236D14C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LP4	-	XC9236D14C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LP4	-	XC9236D14CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LP5	-	XC9236D15C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LP5	-	XC9236D15C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LP5	-	XC9236D15CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LP6	-	XC9236D16C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LP6	-	XC9236D16C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LP6	-	XC9236D16CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LP7	-	XC9236D17C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LP7	-	XC9236D17C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LP7	-	XC9236D17CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LP8	-	XC9236D18C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LP8	-	XC9236D18C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LP8	-	XC9236D18CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LP9	-	XC9236D19C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LP9	-	XC9236D19C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LP9	-	XC9236D19CER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LPA	-	XC9236D1AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LPA	-	XC9236D1AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LPA	-	XC9236D1ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LPB	-	XC9236D1BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LPB	-	XC9236D1BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LPB	-	XC9236D1BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LPC	-	XC9236D1CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LPC	-	XC9236D1CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LPC	-	XC9236D1CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LPD	-	XC9236D1DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LPD	-	XC9236D1DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LPD	-	XC9236D1DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LPE	-	XC9236D1EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LPE	-	XC9236D1EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LPE	-	XC9236D1ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LPF	-	XC9236D1FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LPF	-	XC9236D1FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LPF	-	XC9236D1FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LPH	-	XC9236D1HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LPH	-	XC9236D1HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LPH	-	XC9236D1HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LPK	-	XC9236D1KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LPK	-	XC9236D1KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LPK	-	XC9236D1KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LPL	-	MIC5335-2.7/2.7YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.7V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
LPL	-	XC9236D1LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LPL	-	XC9236D1LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LPL	-	XC9236D1LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LPM	-	XC9236D1MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LPM	-	XC9236D1MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LPM	-	XC9236D1MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LQ	-	R3116K451C	Vdet-IC	4.5V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LQ	-	RP107K241D	LVR-IC	LDO, 2.4V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LR	-	R3116K461C	Vdet-IC	4.6V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LR	-	RP107K251D	LVR-IC	LDO, 2.5V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LR0	-	XC9236D20C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LR0	-	XC9236D20C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LR0	-	XC9236D20CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LR1	-	XC9236D21C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LR1	-	XC9236D21C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LR1	-	XC9236D21CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LR2	-	XC9236D22C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LR2	-	XC9236D22C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LR2	-	XC9236D22CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LR3	-	XC9236D23C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LR3	-	XC9236D23C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LR3	-	XC9236D23CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LR4	-	XC9236D24C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LR4	-	XC9236D24C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LR4	-	XC9236D24CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LR5	-	XC9236D25C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LR5	-	XC9236D25C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LR5	-	XC9236D25CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LR6	-	XC9236D26C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LR6	-	XC9236D26C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LR6	-	XC9236D26CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LR7	-	XC9236D27C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LR7	-	XC9236D27C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LR7	-	XC9236D27CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LR8	-	XC9236D28C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LR8	-	XC9236D28C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LR8	-	XC9236D28CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LR9	-	XC9236D29C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LR9	-	XC9236D29C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LR9	-	XC9236D29CER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LRA	-	XC9236D2AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LRA	-	XC9236D2AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LRA	-	XC9236D2ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LRB	-	XC9236D2BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LRB	-	XC9236D2BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LRB	-	XC9236D2BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LRC	-	XC9236D2CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LRC	-	XC9236D2CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LRC	-	XC9236D2CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LRD	-	XC9236D2DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LRD	-	XC9236D2DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LRD	-	XC9236D2DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LRE	-	XC9236D2EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LRE	-	XC9236D2EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LRE	-	XC9236D2ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LRF	-	XC9236D2FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LRF	-	XC9236D2FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LRF	-	XC9236D2FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LRH	-	XC9236D2HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LRH	-	XC9236D2HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LRH	-	XC9236D2HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LRK	-	XC9236D2KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LRK	-	XC9236D2KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LRK	-	XC9236D2KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LRL	-	XC9236D2LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LRL	-	XC9236D2LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LRL	-	XC9236D2LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LRM	-	XC9236D2MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LRM	-	XC9236D2MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LRM	-	XC9236D2MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LS	-	R3116K471C	Vdet-IC	4.7V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LS	-	RP107K261D	LVR-IC	LDO, 2.6V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LS0	-	XC9236D30C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LS0	-	XC9236D30C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LS0	-	XC9236D30CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LS1	-	XC9236D31C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LS1	-	XC9236D31C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LS1	-	XC9236D31CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LS2	-	XC9236D32C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LS2	-	XC9236D32C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LS2	-	XC9236D32CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LS3	-	XC9236D33C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LS3	-	XC9236D33C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LS3	-	XC9236D33CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LS4	-	XC9236D34C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LS4	-	XC9236D34C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LS4	-	XC9236D34CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LS5	-	XC9236D35C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LS5	-	XC9236D35C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LS5	-	XC9236D35CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LS6	-	XC9236D36C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LS6	-	XC9236D36C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LS6	-	XC9236D36CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LS7	-	XC9236D37C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LS7	-	XC9236D37C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LS7	-	XC9236D37CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LS8	-	XC9236D38C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LS8	-	XC9236D38C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LS8	-	XC9236D38CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LS9	-	XC9236D39C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LS9	-	XC9236D39C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LS9	-	XC9236D39CER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LSA	-	XC9236D3AC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LSA	-	XC9236D3AC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LSA	-	XC9236D3ACER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LSB	-	XC9236D3BC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LSB	-	XC9236D3BC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LSB	-	XC9236D3BCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LSC	-	XC9236D3CC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LSC	-	XC9236D3CC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LSC	-	XC9236D3CCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LSD	-	XC9236D3DC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LSD	-	XC9236D3DC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LSD	-	XC9236D3DCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LSE	-	XC9236D3EC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LSE	-	XC9236D3EC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LSE	-	XC9236D3ECER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LSF	-	XC9236D3FC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LSF	-	XC9236D3FC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LSF	-	XC9236D3FCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LSH	-	XC9236D3HC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LSH	-	XC9236D3HC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LSH	-	XC9236D3HCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LSK	-	XC9236D3KC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LSK	-	XC9236D3KC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LSK	-	XC9236D3KCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LSL	-	XC9236D3LC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LSL	-	XC9236D3LC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LSL	-	XC9236D3LCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LSM	-	XC9236D3MC0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LSM	-	XC9236D3MC4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LSM	-	XC9236D3MCER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LT	-	R3116K481C	Vdet-IC	4.8V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LT	-	RP107K271D	LVR-IC	LDO, 2.7V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LT0	-	XC9236D40C0R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LT0	-	XC9236D40C4R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LT0	-	XC9236D40CER-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LU	-	MAX8840ELT27+T	LVR-IC	LDO, 2.7V±2%, 150mA, +CE	DFN-6	52	VR7a	9t	Max
LU	-	R3116K491C	Vdet-IC	4.9V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LU	-	RP107K281D	LVR-IC	LDO, 2.8V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LU8	-	XC9236D08D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LU8	-	XC9236D08D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LU8	-	XC9236D08DER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LU9	-	XC9236D09D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LU9	-	XC9236D09D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LU9	-	XC9236D09DER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LUL	-	XC9236D0LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LUL	-	XC9236D0LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LUL	-	XC9236D0LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LUM	-	XC9236D0MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LUM	-	XC9236D0MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LUM	-	XC9236D0MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LV	-	MAX8840ELT28+T	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	DFN-6	52	VR7a	9t	Max

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LV	-	R3116K501C	Vdet-IC	5.V±0.8%, -Reset PPO	DFN1010-4	48rj	VD3	9a	Ric
LV	-	RP107K291D	LVR-IC	LDO, 2.9V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LV0	-	XC9236D10D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LV0	-	XC9236D10D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LV0	-	XC9236D10DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LV1	-	XC9236D11D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LV1	-	XC9236D11D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LV1	-	XC9236D11DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LV2	-	XC9236D12D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LV2	-	XC9236D12D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LV2	-	XC9236D12DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LV3	-	XC9236D13D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LV3	-	XC9236D13D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LV3	-	XC9236D13DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LV4	-	XC9236D14D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LV4	-	XC9236D14D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LV4	-	XC9236D14DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LV5	-	XC9236D15D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LV5	-	XC9236D15D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LV5	-	XC9236D15DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LV6	-	XC9236D16D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LV6	-	XC9236D16D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LV6	-	XC9236D16DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LV7	-	XC9236D17D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LV7	-	XC9236D17D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LV7	-	XC9236D17DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LV8	-	XC9236D18D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LV8	-	XC9236D18D4R-G	LVR-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LV8	-	XC9236D18DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LV9	-	XC9236D19D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LV9	-	XC9236D19D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LV9	-	XC9236D19DER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LVA	-	XC9236D1AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LVA	-	XC9236D1AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LVA	-	XC9236D1ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LVB	-	XC9236D1BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LVB	-	XC9236D1BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LVB	-	XC9236D1BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LVC	-	XC9236D1CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LVC	-	XC9236D1CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LVC	-	XC9236D1CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LVD	-	XC9236D1DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LVD	-	XC9236D1DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LVD	-	XC9236D1DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LVE	-	XC9236D1ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LVE	-	XC9236D1ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LVE	-	XC9236D1EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LVF	-	XC9236D1FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LVF	-	XC9236D1FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LVF	-	XC9236D1FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LVH	-	XC9236D1HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LVH	-	XC9236D1HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LVH	-	XC9236D1HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LVK	-	XC9236D1KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LVK	-	XC9236D1KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LVK	-	XC9236D1KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LVL	-	XC9236D1LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LVL	-	XC9236D1LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LVL	-	XC9236D1LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LVM	-	XC9236D1MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LVM	-	XC9236D1MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LVM	-	XC9236D1MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LW	-	MAX8840ELT29+T	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	DFN-6	52	VR7a	9t	Max
LW	-	RP107K301D	LVR-IC	LDO, 3.0V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LX	-	MAX8840ELT19+T	LVR-IC	LDO, 1.9V±2%, 150mA, +CE	DFN-6	52	VR7a	9t	Max
LX	-	RP107K311D	LVR-IC	LDO, 3.1V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LX0	-	XC9236D20D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LX0	-	XC9236D20D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LX0	-	XC9236D20DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LX1	-	XC9236D21D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LX1	-	XC9236D21D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LX1	-	XC9236D21DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LX2	-	XC9236D22D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LX2	-	XC9236D22D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LX2	-	XC9236D22DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LX3	-	XC9236D23D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LX3	-	XC9236D23D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LX3	-	XC9236D23DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LX4	-	XC9236D24D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LX4	-	XC9236D24D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LX4	-	XC9236D24DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LX5	-	XC9236D25D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LX5	-	XC9236D25D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LX5	-	XC9236D25DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LX6	-	XC9236D26D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LX6	-	XC9236D26D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LX6	-	XC9236D26DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LX7	-	XC9236D27D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LX7	-	XC9236D27D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LX7	-	XC9236D27DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LX8	-	XC9236D28D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LX8	-	XC9236D28D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LX8	-	XC9236D28DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LX9	-	XC9236D29D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LX9	-	XC9236D29D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LX9	-	XC9236D29DER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LXA	-	XC9236D2AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LXA	-	XC9236D2AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LXA	-	XC9236D2ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LXB	-	XC9236D2BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LXB	-	XC9236D2BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LXB	-	XC9236D2BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LXC	-	XC9236D2CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LXC	-	XC9236D2CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LXC	-	XC9236D2CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LXD	-	XC9236D2DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LXD	-	XC9236D2DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LXD	-	XC9236D2DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LXE	-	XC9236D2ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LXE	-	XC9236D2ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LXE	-	XC9236D2EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LXF	-	XC9236D2FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LXF	-	XC9236D2FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LXF	-	XC9236D2FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LXH	-	XC9236D2HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LXH	-	XC9236D2HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LXH	-	XC9236D2HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LXK	-	XC9236D2KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LXK	-	XC9236D2KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LXK	-	XC9236D2KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LXL	-	XC9236D2LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LXL	-	XC9236D2LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LXL	-	XC9236D2LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LXM	-	XC9236D2MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LXM	-	XC9236D2MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LXM	-	XC9236D2MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LY	-	RP107K321D	LVR-IC	LDO, 3.2V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LY0	-	XC9236D30D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LY0	-	XC9236D30D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LY0	-	XC9236D30DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LY1	-	XC9236D31D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LY1	-	XC9236D31D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LY1	-	XC9236D31DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LY2	-	XC9236D32D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LY2	-	XC9236D32D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LY2	-	XC9236D32DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LY3	-	XC9236D33D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LY3	-	XC9236D33D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LY3	-	XC9236D33DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LY4	-	XC9236D34D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
LY4	-	XC9236D34D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LY4	-	XC9236D34DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LY5	-	XC9236D35D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LY5	-	XC9236D35D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LY5	-	XC9236D35DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LY6	-	XC9236D36D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LY6	-	XC9236D36D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LY6	-	XC9236D36DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LY7	-	XC9236D37D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LY7	-	XC9236D37D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LY7	-	XC9236D37DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LY8	-	XC9236D38D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LY8	-	XC9236D38D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LY8	-	XC9236D38DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LY9	-	XC9236D39D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LY9	-	XC9236D39D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LY9	-	XC9236D39DER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LYA	-	XC9236D3AD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LYA	-	XC9236D3AD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LYA	-	XC9236D3ADER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LYB	-	XC9236D3BD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LYB	-	XC9236D3BD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LYB	-	XC9236D3BDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LYC	-	XC9236D3CD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LYC	-	XC9236D3CD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LYC	-	XC9236D3CDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LYD	-	XC9236D3DD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LYD	-	XC9236D3DD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LYD	-	XC9236D3DDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LYE	-	XC9236D3ED0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LYE	-	XC9236D3ED4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LYE	-	XC9236D3EDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LYF	-	XC9236D3FD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LYF	-	XC9236D3FD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LYF	-	XC9236D3FDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LYH	-	XC9236D3HD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LYH	-	XC9236D3HD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LYH	-	XC9236D3HDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LYK	-	XC9236D3KD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LYK	-	XC9236D3KD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LYK	-	XC9236D3KDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LYL	-	XC9236D3LD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LYL	-	XC9236D3LD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LYL	-	XC9236D3LDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LYM	-	XC9236D3MD0R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LYM	-	XC9236D3MD4R-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LYM	-	XC9236D3MDER-G	DC-DC-IC	PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
LZ	-	MAX8840ELT30+T	LVR-IC	LDO, 3.0V±2%, 150mA, +CE	DFN-6	52	VR7a	9t	Max
LZ	-	RP107K331D	LVR-IC	LDO, 3.3V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
LZ0	-	XC9236D40D0R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
LZ0	-	XC9236D40D4R-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
LZ0	-	XC9236D40DER-G	DC-DC-IC	PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
m	-	BU26UA3WNVX	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
M	-	UNRL115	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1=10k	ML4	31tm	-	2b	Pan
M	-	UNRL215	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1=10k	ML4	31tm	-	2b	Pan
M0	-	R3117K173A	Vdet-IC	1.7V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
M0	-	RP114K181B	LVR-IC	LDO, 1.8V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
M0	-	XC6GN2002HR	Vdet-IC	2.0V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
M03	-	XC61GN2002HR	Vdet-IC	2.0V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
M0A	-	XC6108N20AGR	Vdet-IC	2.0V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M0A	-	XC6118C10AGR-G	Vdet-IC	1.0V±30mV, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
M0B	-	XC6108N20BGR	Vdet-IC	2.0V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M0B	-	XC6118C10BGR-G	Vdet-IC	1.0V±30mV, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
M0C	-	XC6108N20CGR	Vdet-IC	2.0V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M0C	-	XC6118C10CGR-G	Vdet-IC	1.0V±30mV, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
M0D	-	XC6108N20DGR	Vdet-IC	2.0V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M0D	-	XC6118C10DGR-G	Vdet-IC	1.0V±30mV, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
M1	-	R3117K183A	Vdet-IC	1.8V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
M1	-	RP114K191B	LVR-IC	LDO, 1.9V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
M1	-	XC6GN2102HR	Vdet-IC	2.1V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M13	-	XC61GN2102HR	Vdet-IC	2.1V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
M15B	-	R1163K151B	LVR-IC	LDO, 1.5V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M16B	-	R1163K161B	LVR-IC	LDO, 1.6V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M17B	-	R1163K171B	LVR-IC	LDO, 1.7V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M185	-	R1163K181B5	LVR-IC	LDO, 1.85V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M18B	-	R1163K181B	LVR-IC	LDO, 1.8V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M19B	-	R1163K191B	LVR-IC	LDO, 1.9V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M1A	-	XC6108N21AGR	Vdet-IC	2.1V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M1A	-	XC6118C11AGR-G	Vdet-IC	1.1V±30mV, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
M1B	-	XC6108N21BGR	Vdet-IC	2.1V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M1B	-	XC6118C11BGR-G	Vdet-IC	1.1V±30mV, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
M1C	-	XC6108N21CGR	Vdet-IC	2.1V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M1C	-	XC6118C11CGR-G	Vdet-IC	1.1V±30mV, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
M1D	-	XC6108N21DGR	Vdet-IC	2.1V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M1D	-	XC6118C11DGR-G	Vdet-IC	1.1V±30mV, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
M2	-	R3117K193A	Vdet-IC	1.9V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
M2	-	RP114K201B	LVR-IC	LDO, 2.0V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
M2	-	XC6GN2202HR	Vdet-IC	2.2V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
M20B	-	R1163K201B	LVR-IC	LDO, 2.0V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M21B	-	R1163K211B	LVR-IC	LDO, 2.1V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M22B	-	R1163K221B	LVR-IC	LDO, 2.2V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M23	-	XC61GN2202HR	Vdet-IC	2.2V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
M23B	-	R1163K231B	LVR-IC	LDO, 2.3V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M24B	-	R1163K241B	LVR-IC	LDO, 2.4V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M25B	-	R1163K251B	LVR-IC	LDO, 2.5V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M26B	-	R1163K261B	LVR-IC	LDO, 2.6V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M27B	-	R1163K271B	LVR-IC	LDO, 2.7V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M285	-	R1163K281B5	LVR-IC	LDO, 2.85V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M28B	-	R1163K281B	LVR-IC	LDO, 2.8V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M29B	-	R1163K291B	LVR-IC	LDO, 2.9V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M2A	-	XC6108N22AGR	Vdet-IC	2.2V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M2A	-	XC6118C12AGR-G	Vdet-IC	1.2V±30mV, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
M2B	-	XC6108N22BGR	Vdet-IC	2.2V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M2B	-	XC6118C12BGR-G	Vdet-IC	1.2V±30mV, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
M2C	-	XC6108N22CGR	Vdet-IC	2.2V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M2C	-	XC6118C12CGR-G	Vdet-IC	1.2V±30mV, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
M2D	-	XC6108N22DGR	Vdet-IC	2.2V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M2D	-	XC6118C12DGR-G	Vdet-IC	1.2V±30mV, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
M3	-	NX3L1T384GM	CMOS-Log	Single-pole single-throw analog switch	SOT886	57	Log86	9z	Nxp
M3	-	R3117K203A	Vdet-IC	2.0V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
M3	-	RP114K211B	LVR-IC	LDO, 2.1V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
M3	-	XC6GN2302HR	Vdet-IC	2.3V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
M30B	-	R1163K301B	LVR-IC	LDO, 3.0V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M31B	-	R1163K311B	LVR-IC	LDO, 3.1V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M32B	-	R1163K321B	LVR-IC	LDO, 3.2V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M33	-	XC61GN2302HR	Vdet-IC	2.3V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
M33B	-	R1163K331B	LVR-IC	LDO, 3.3V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M34B	-	R1163K341B	LVR-IC	LDO, 3.4V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M35B	-	R1163K351B	LVR-IC	LDO, 3.5V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M36B	-	R1163K361B	LVR-IC	LDO, 3.6V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M37B	-	R1163K371B	LVR-IC	LDO, 3.7V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M38B	-	R1163K381B	LVR-IC	LDO, 3.8V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M39B	-	R1163K391B	LVR-IC	LDO, 3.9V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M3A	-	XC6108N23AGR	Vdet-IC	2.3V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M3A	-	XC6118C13AGR-G	Vdet-IC	1.3V±30mV, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
M3B	-	XC6108N23BGR	Vdet-IC	2.3V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M3B	-	XC6118C13BGR-G	Vdet-IC	1.3V±30mV, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
M3C	-	XC6108N23CGR	Vdet-IC	2.3V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M3C	-	XC6118C13CGR-G	Vdet-IC	1.3V±30mV, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
M3D	-	XC6108N23DGR	Vdet-IC	2.3V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M3D	-	XC6118C13DGR-G	Vdet-IC	1.3V±30mV, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
M4	-	MIC5381-2.8/1.2YFT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.2V±2%, 150mA, +CE, CL	MLF-6A	81g5	VR19	9x	Mcr
M4	-	R3117K213A	Vdet-IC	2.1V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
M4	-	RP114K221B	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
M4	-	XC6GN2402HR	Vdet-IC	2.4V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
M40B	-	R1163K401B	LVR-IC	LDO, 4.0V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
M43	-	XC61GN2402HR	Vdet-IC	2.4V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
M4A	-	XC6108N24AGR	Vdet-IC	2.4V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M4A	-	XC6118C14AGR-G	Vdet-IC	1.4V±30mV, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
M4B	-	XC6108N24BGR	Vdet-IC	2.4V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
M4B	-	XC6118C14BGR-G	Vdet-IC	1.4V±30mV, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
M4C	-	XC6108N24CGR	Vdet-IC	2.4V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M4C	-	XC6118C14CGR-G	Vdet-IC	1.4V±30mV, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
M4D	-	XC6108N24DGR	Vdet-IC	2.4V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M4D	-	XC6118C14DGR-G	Vdet-IC	1.4V±30mV, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
M5	-	R3117K223A	Vdet-IC	2.2V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
M5	-	RP114K231B	LVR-IC	LDO, 2.3V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
M5	-	XC6GN2502HR	Vdet-IC	2.5V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
M53	-	NX3L1T53GD	CMOS-Log	Single-pole double-throw analog switch	SOT996-2	54	Log58	9z	Nxp
M53	-	NX3L1T53GM	CMOS-Log	Single-pole double-throw analog switch	SOT902-1	51	Log58	9z	Nxp
M53	-	NX3L1T53GT	CMOS-Log	Single-pole double-throw analog switch	SOT833-1	53	Log58	9z	Nxp
M53	-	XC61GN2502HR	Vdet-IC	2.5V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
M5A	-	XC6108N25AGR	Vdet-IC	2.5V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M5A	-	XC6118C15AGR-G	Vdet-IC	1.5V±30mV, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
M5B	-	XC6108N25BGR	Vdet-IC	2.5V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M5B	-	XC6118C15BGR-G	Vdet-IC	1.5V±30mV, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
M5C	-	XC6108N25CGR	Vdet-IC	2.5V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M5C	-	XC6118C15CGR-G	Vdet-IC	1.5V±30mV, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
M5D	-	XC6108N25DGR	Vdet-IC	2.5V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M5D	-	XC6118C15DGR-G	Vdet-IC	1.5V±30mV, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
M6	-	R3117K233A	Vdet-IC	2.3V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
M6	-	RP114K241B	LVR-IC	LDO, 2.4V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
M6	-	XC6GN2602HR	Vdet-IC	2.6V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
M63	-	XC61GN2602HR	Vdet-IC	2.6V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
M6A	-	XC6108N26AGR	Vdet-IC	2.6V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M6A	-	XC6118C16AGR-G	Vdet-IC	1.6V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
M6B	-	XC6108N26BGR	Vdet-IC	2.6V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M6B	-	XC6118C16BGR-G	Vdet-IC	1.6V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
M6C	-	XC6108N26CGR	Vdet-IC	2.6V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M6C	-	XC6118C16CGR-G	Vdet-IC	1.6V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
M6D	-	XC6108N26DGR	Vdet-IC	2.6V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M6D	-	XC6118C16DGR-G	Vdet-IC	1.6V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
M7	-	R3117K243A	Vdet-IC	2.4V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
M7	-	RP114K251B	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
M7	-	XC6GN2702HR	Vdet-IC	2.7V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
M73	-	XC61GN2702HR	Vdet-IC	2.7V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
M7A	-	XC6108N27AGR	Vdet-IC	2.7V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M7A	-	XC6118C17AGR-G	Vdet-IC	1.7V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
M7B	-	XC6108N27BGR	Vdet-IC	2.7V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M7B	-	XC6118C17BGR-G	Vdet-IC	1.7V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
M7C	-	XC6108N27CGR	Vdet-IC	2.7V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M7C	-	XC6118C17CGR-G	Vdet-IC	1.7V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
M7D	-	XC6108N27DGR	Vdet-IC	2.7V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M7D	-	XC6118C17DGR-G	Vdet-IC	1.7V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
M8	-	R3117K253A	Vdet-IC	2.5V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
M8	-	RP114K261B	LVR-IC	LDO, 2.6V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
M8	-	XC6GN2802HR	Vdet-IC	2.8V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
M83	-	XC61GN2802HR	Vdet-IC	2.8V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
M8A	-	XC6108N28AGR	Vdet-IC	2.8V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M8A	-	XC6118C18AGR-G	Vdet-IC	1.8V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
M8B	-	XC6108N28BGR	Vdet-IC	2.8V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M8B	-	XC6118C18BGR-G	Vdet-IC	1.8V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
M8C	-	XC6108N28CGR	Vdet-IC	2.8V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M8C	-	XC6118C18CGR-G	Vdet-IC	1.8V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
M8D	-	XC6108N28DGR	Vdet-IC	2.8V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M8D	-	XC6118C18DGR-G	Vdet-IC	1.8V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
M8K	-	MIC5370-2.8/2.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.6V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
M9	-	R3117K263A	Vdet-IC	2.6V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
M9	-	RP114K271B	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
M9	-	XC6GN2902HR	Vdet-IC	2.9V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
M93	-	XC61GN2902HR	Vdet-IC	2.9V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
M9A	-	XC6108N29AGR	Vdet-IC	2.9V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M9A	-	XC6118C19AGR-G	Vdet-IC	1.9V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
M9B	-	XC6108N29BGR	Vdet-IC	2.9V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
M9B	-	XC6118C19BGR-G	Vdet-IC	1.9V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
M9C	-	XC6108N29CGR	Vdet-IC	2.9V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M9C	-	XC6118C19CGR-G	Vdet-IC	1.9V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
M9D	-	XC6108N29DGR	Vdet-IC	2.9V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
M9D	-	XC6118C19DGR-G	Vdet-IC	1.9V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
MA	-	R1118K081B	LVR-IC	0.8V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MA	-	RP107K341D	LVR-IC	LDO, 3.4V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
MA8	-	XC9237C08C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MA8	-	XC9237C08C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MA8	-	XC9237C08CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MA9	-	XC9237C09C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MA9	-	XC9237C09C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MA9	-	XC9237C09CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MAG	-	NCP2890AFCT2	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	AFP44	9o	Ons
MAH•	-	NCP2890AFCT2G	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	AFP44	9o	Ons
MAI	-	NCP4894FCT1	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	AFP53	9o	Ons
MAI	-	NCP4894FCT1G	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	AFP53	9a	Ons
MAJG	-	MIC5264-2.5/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.8V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MAKG	-	MIC5264-2.6/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/1.8V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MAKK	-	MIC5264-2.6/2.6YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.6V/2.6V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MAL	-	XC9237C0LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MAL	-	XC9237C0LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MAL	-	XC9237C0LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MAM	-	NCP4896FCT1	Lin-IC	AF PA, BTL 2.2..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	-	9o	Ons
MAM	-	XC9237C0MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MAM	-	XC9237C0MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MAM	-	XC9237C0MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MAM•	-	NCP4896FCT1G	Lin-IC	AF PA, BTL 2.2..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	-	9o	Ons
MAMF	-	MIC5264-2.8/1.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MAMJ	-	MIC5264-2.8/2.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.5V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MAMK	-	MIC5264-2.8/2.6YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.6V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MAMM	-	MIC5264-2.8/2.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/28V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MANG	-	MIC5264-2.85/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.8V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MANN	-	MIC5264-2.85/2.85YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.85V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MAOF	-	MIC5264-2.9/1.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/1.5V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MAOG	-	MIC5264-2.9/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/1.8V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MAOK	-	MIC5264-2.9/2.6YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/2.6V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MAPG	-	MIC5264-3.0/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.8V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MAPJ	-	MIC5264-3.0/2.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.5V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MAPM	-	MIC5264-3.0/2.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.8V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MAPP	-	MIC5264-3.0/3.0YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MAQ	-	NCP2820FCT1	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 2.65W(5V/4Ω), shutdown	BGA-9	39	AFP45	9o	Ons
MAQ	-	NCP9004FCT1G	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 2.65W(5V/4Ω), shutdown	BGA-9	39	AFP45	9o	Ons
MAQ	mh	NCP2820FCT1G	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 2.65W(5V/4Ω), shutdown	BGA-9	39	AFP45	9o	Ons
MAQ•	-	NCP2820FCT2G	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 2.65W(5V/4Ω), shutdown	BGA-9	39	AFP45	9o	Ons
MASG	-	MIC5264-3.3/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MASJ	-	MIC5264-3.3/2.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.5V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MASP	-	MIC5264-3.3/3.0YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.0V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MASS	-	MIC5264-3.3/3.3YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±2%, 150mA, +CE	MLF-10L	37	VR22	9i	Mcr
MAU	-	NCP2821FCT1G	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 2.65W(5V/4Ω), shutdown	BGA-9	39	AFP52	9o	Ons
MAX	-	NCP2892AFCT2G	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.3W(5V/8Ω), shutdown	BGA-9	39	AFP44	9o	Ons
MAZ	-	NCP2892BFCT2G	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.3W(5V/8Ω), shutdown	BGA-9	39	AFP44	9o	Ons
MAZ	-	NCP9002FCT2G	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.3W(5V/8Ω), shutdown	BGA-9	39	AFP44	9o	Ons
MB	-	R1118K091B	LVR-IC	0.9V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MB	-	RP107K351D	LVR-IC	LDO, 3.5V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
MB0	-	XC9237C10C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MB0	-	XC9237C10C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MB0	-	XC9237C10CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MB1	-	XC9237C11C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MB1	-	XC9237C11C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MB1	-	XC9237C11CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MB2	-	XC9237C12C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MB2	-	XC9237C12C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MB2	-	XC9237C12CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MB3	-	XC9237C13C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MB3	-	XC9237C13C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MB3	-	XC9237C13CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MB4	-	XC9237C14C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MB4	-	XC9237C14C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MB4	-	XC9237C14CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MB5	-	XC9237C15C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MB5	-	XC9237C15C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MB5	-	XC9237C15CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MB6	-	XC9237C16C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MB6	-	XC9237C16C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MB6	-	XC9237C16CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MB7	-	XC9237C17C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MB7	-	XC9237C17C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MB7	-	XC9237C17CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MB8	-	XC9237C18C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MB8	-	XC9237C18C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MB8	-	XC9237C18CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MB9	-	XC9237C19C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MB9	-	XC9237C19C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MB9	-	XC9237C19CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MBA	-	NCP2990FCT2G	Lin-IC	AF PA, BTL, 2.2..5.5V, 1.3W(5V/8Ω), shutdown	BGA-9	39	AFP44	9o	Ons
MBA	-	XC9237C1AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MBA	-	XC9237C1AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MBA	-	XC9237C1ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MBB	-	XC9237C1BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MBB	-	XC9237C1BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MBB	-	XC9237C1BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MBC	-	XC9237C1CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MBC	-	XC9237C1CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MBC	-	XC9237C1CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MBD	-	XC9237C1DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MBD	-	XC9237C1DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MBD	-	XC9237C1DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MBE	-	XC9237C1EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MBE	-	XC9237C1EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MBE	-	XC9237C1ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MBF	-	XC9237C1FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MBF	-	XC9237C1FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MBF	-	XC9237C1FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MBH	-	XC9237C1HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MBH	-	XC9237C1HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MBH	-	XC9237C1HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MBK	-	XC9237C1KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MBK	-	XC9237C1KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MBK	-	XC9237C1KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MBL	-	XC9237C1LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MBL	-	XC9237C1LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MBL	-	XC9237C1LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MBM	-	XC9237C1MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MBM	-	XC9237C1MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MBM	-	XC9237C1MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MBZ•	-	NCV2890DMR2G	Lin-IC	AF PA, BTL 2.2..5.5V, 1W(5V/8Ω), shutdown	DFN-8	92	AFP12	9a	Ons
MC	-	R1118K101B	LVR-IC	1.0V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MC	-	RP107K361D	LVR-IC	LDO, 3.6V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
MC0	-	XC9237C20C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MC0	-	XC9237C20C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MC0	-	XC9237C20CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MC1	-	XC9237C21C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MC1	-	XC9237C21C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MC1	-	XC9237C21CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MC151	-	XC9110C151ER	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC161	-	XC9110C161ER	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC171	-	XC9110C171ER	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC181	-	XC9110C181ER	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC191	-	XC9110C191ER	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC2	-	XC9237C22C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MC2	-	XC9237C22C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MC2	-	XC9237C22CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MC201	-	XC9110C201ER	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC211	-	XC9110C211ER	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC221	-	XC9110C221ER	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC231	-	XC9110C231ER	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC241	-	XC9110C241ER	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC251	-	XC9110C251ER	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC261	-	XC9110C261ER	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC271	-	XC9110C271ER	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC281	-	XC9110C281ER	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC291	-	XC9110C291ER	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC3	-	XC9237C23C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MC3	-	XC9237C23C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MC3	-	XC9237C23CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MC301	-	XC9110C301ER	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC311	-	XC9110C311ER	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC321	-	XC9110C321ER	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC331	-	XC9110C331ER	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC341	-	XC9110C341ER	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC351	-	XC9110C351ER	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC361	-	XC9110C361ER	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC371	-	XC9110C371ER	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC381	-	XC9110C381ER	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC391	-	XC9110C391ER	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC4	-	XC9237C24C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MC4	-	XC9237C24C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MC4	-	XC9237C24CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MC401	-	XC9110C401ER	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC411	-	XC9110C411ER	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC421	-	XC9110C421ER	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC431	-	XC9110C431ER	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC441	-	XC9110C441ER	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC451	-	XC9110C451ER	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC461	-	XC9110C461ER	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC471	-	XC9110C471ER	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC481	-	XC9110C481ER	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC491	-	XC9110C491ER	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC5	-	XC9237C25C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MC5	-	XC9237C25C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MC5	-	XC9237C25CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MC501	-	XC9110C501ER	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC511	-	XC9110C511ER	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC521	-	XC9110C521ER	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC531	-	XC9110C531ER	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC541	-	XC9110C541ER	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC551	-	XC9110C551ER	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC561	-	XC9110C561ER	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC571	-	XC9110C571ER	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC581	-	XC9110C581ER	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC591	-	XC9110C591ER	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC6	-	XC9237C26C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MC6	-	XC9237C26C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MC6	-	XC9237C26CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MC601	-	XC9110C601ER	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC611	-	XC9110C611ER	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC621	-	XC9110C621ER	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC631	-	XC9110C631ER	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC641	-	XC9110C641ER	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC651	-	XC9110C651ER	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC661	-	XC9110C661ER	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC671	-	XC9110C671ER	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC681	-	XC9110C681ER	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC691	-	XC9110C691ER	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC7	-	XC9237C27C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MC7	-	XC9237C27C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MC7	-	XC9237C27CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MC701	-	XC9110C701ER	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
MC8	-	XC9237C28C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MC8	-	XC9237C28C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MC8	-	XC9237C28CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MC9	-	XC9237C29C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MC9	-	XC9237C29C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MC9	-	XC9237C29CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MCA	-	XC9237C2AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MCA	-	XC9237C2AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MCA	-	XC9237C2ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MCB	-	XC9237C2BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MCB	-	XC9237C2BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MCB	-	XC9237C2BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MCC	-	XC9237C2CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MCC	-	XC9237C2CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MCC	-	XC9237C2CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MCD	-	XC9237C2DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MCD	-	XC9237C2DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MCD	-	XC9237C2DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MCE	-	XC9237C2EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MCE	-	XC9237C2EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MCE	-	XC9237C2ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MCF	-	XC9237C2FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MCF	-	XC9237C2FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MCF	-	XC9237C2FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MCH	-	XC9237C2HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MCH	-	XC9237C2HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MCH	-	XC9237C2HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MCK	-	XC9237C2KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MCK	-	XC9237C2KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MCK	-	XC9237C2KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MCL	-	XC9237C2LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MCL	-	XC9237C2LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MCL	-	XC9237C2LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MCM	-	XC9237C2MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MCM	-	XC9237C2MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MCM	-	XC9237C2MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MD	-	R1118K111B	LVR-IC	1.1V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MD	-	RP107K371D	LVR-IC	LDO, 3.7V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
MD0	-	XC9237C30C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MD0	-	XC9237C30C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MD0	-	XC9237C30CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MD1	-	XC9237C31C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MD1	-	XC9237C31C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MD1	-	XC9237C31CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MD151	-	XC9110D151ER	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD161	-	XC9110D161ER	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD171	-	XC9110D171ER	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD181	-	XC9110D181ER	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD191	-	XC9110D191ER	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD2	-	XC9237C32C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MD2	-	XC9237C32C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MD2	-	XC9237C32CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MD201	-	XC9110D201ER	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD211	-	XC9110D211ER	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD221	-	XC9110D221ER	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD231	-	XC9110D231ER	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD241	-	XC9110D241ER	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD251	-	XC9110D251ER	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD261	-	XC9110D261ER	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD271	-	XC9110D271ER	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD281	-	XC9110D281ER	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD291	-	XC9110D291ER	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD3	-	XC9237C33C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MD3	-	XC9237C33C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MD3	-	XC9237C33CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MD301	-	XC9110D301ER	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD311	-	XC9110D311ER	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD321	-	XC9110D321ER	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD331	-	XC9110D331ER	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD341	-	XC9110D341ER	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD351	-	XC9110D351ER	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD361	-	XC9110D361ER	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD371	-	XC9110D371ER	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD381	-	XC9110D381ER	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD391	-	XC9110D391ER	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD4	-	XC9237C34C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MD4	-	XC9237C34C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MD4	-	XC9237C34CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MD401	-	XC9110D401ER	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD411	-	XC9110D411ER	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD421	-	XC9110D421ER	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD431	-	XC9110D431ER	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD441	-	XC9110D441ER	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD451	-	XC9110D451ER	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD461	-	XC9110D461ER	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD471	-	XC9110D471ER	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD481	-	XC9110D481ER	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MD491	-	XC9110D491ER	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD5	-	XC9237C35C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MD5	-	XC9237C35C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MD5	-	XC9237C35CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MD501	-	XC9110D501ER	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD511	-	XC9110D511ER	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD521	-	XC9110D521ER	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD531	-	XC9110D531ER	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD541	-	XC9110D541ER	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD551	-	XC9110D551ER	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD561	-	XC9110D561ER	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD571	-	XC9110D571ER	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD581	-	XC9110D581ER	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD591	-	XC9110D591ER	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD6	-	XC9237C36C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MD6	-	XC9237C36C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MD6	-	XC9237C36CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MD601	-	XC9110D601ER	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD611	-	XC9110D611ER	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD621	-	XC9110D621ER	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD631	-	XC9110D631ER	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD641	-	XC9110D641ER	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD651	-	XC9110D651ER	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD661	-	XC9110D661ER	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD671	-	XC9110D671ER	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD681	-	XC9110D681ER	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD691	-	XC9110D691ER	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD7	-	XC9237C37C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MD7	-	XC9237C37C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MD7	-	XC9237C37CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MD701	-	XC9110D701ER	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
MD8	-	XC9237C38C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MD8	-	XC9237C38C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MD8	-	XC9237C38CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MD9	-	XC9237C39C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MD9	-	XC9237C39C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MD9	-	XC9237C39CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MDA	-	XC9237C3AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MDA	-	XC9237C3AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MDA	-	XC9237C3ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MDB	-	XC9237C3BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MDB	-	XC9237C3BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MDB	-	XC9237C3BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MDC	-	XC9237C3CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MDC	-	XC9237C3CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MDC	-	XC9237C3CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MDD	-	XC9237C3DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MDD	-	XC9237C3DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MDD	-	XC9237C3DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MDE	-	XC9237C3EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MDE	-	XC9237C3EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MDE	-	XC9237C3ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MDF	-	XC9237C3FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MDF	-	XC9237C3FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MDF	-	XC9237C3FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MDH	-	XC9237C3HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MDH	-	XC9237C3HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MDH	-	XC9237C3HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MDK	-	XC9237C3KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MDK	-	XC9237C3KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MDK	-	XC9237C3KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MDL	-	XC9237C3LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MDL	-	XC9237C3LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MDL	-	XC9237C3LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MDM	-	XC9237C3MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MDM	-	XC9237C3MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MDM	-	XC9237C3MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
ME	-	R1118K121B	LVR-IC	1.2V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
ME	-	RP107K381D	LVR-IC	LDO, 3.8V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
ME0	-	XC9237C40C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ME0	-	XC9237C40C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ME0	-	XC9237C40CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
ME151	-	XC9110E151ER	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME161	-	XC9110E161ER	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME171	-	XC9110E171ER	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME181	-	XC9110E181ER	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME191	-	XC9110E191ER	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME201	-	XC9110E201ER	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME211	-	XC9110E211ER	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME221	-	XC9110E221ER	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME231	-	XC9110E231ER	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME241	-	XC9110E241ER	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME251	-	XC9110E251ER	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME261	-	XC9110E261ER	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME271	-	XC9110E271ER	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME281	-	XC9110E281ER	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME291	-	XC9110E291ER	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME301	-	XC9110E301ER	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME311	-	XC9110E311ER	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME321	-	XC9110E321ER	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME331	-	XC9110E331ER	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME341	-	XC9110E341ER	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME351	-	XC9110E351ER	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME361	-	XC9110E361ER	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME371	-	XC9110E371ER	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME381	-	XC9110E381ER	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME391	-	XC9110E391ER	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME401	-	XC9110E401ER	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME411	-	XC9110E411ER	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME421	-	XC9110E421ER	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME431	-	XC9110E431ER	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME441	-	XC9110E441ER	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME451	-	XC9110E451ER	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME461	-	XC9110E461ER	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME471	-	XC9110E471ER	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME481	-	XC9110E481ER	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME491	-	XC9110E491ER	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME501	-	XC9110E501ER	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME511	-	XC9110E511ER	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME521	-	XC9110E521ER	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME531	-	XC9110E531ER	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME541	-	XC9110E541ER	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME551	-	XC9110E551ER	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME561	-	XC9110E561ER	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME571	-	XC9110E571ER	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME581	-	XC9110E581ER	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME591	-	XC9110E591ER	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME601	-	XC9110E601ER	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME611	-	XC9110E611ER	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME621	-	XC9110E621ER	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME631	-	XC9110E631ER	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME641	-	XC9110E641ER	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME651	-	XC9110E651ER	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME661	-	XC9110E661ER	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME671	-	XC9110E671ER	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME681	-	XC9110E681ER	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME691	-	XC9110E691ER	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
ME701	-	XC9110E701ER	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
MF	-	MIC2211-2.8/1.5BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(150mA)/1.5V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
MF	-	MIC5381-3.0/3.0YFT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 150mA, +CE, CL	MLF-6A	81g5	VR19	9x	Mcr
MF	-	R1118K121B5	LVR-IC	1.25V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MF	-	RP107K391D	LVR-IC	LDO, 3.9V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
MF151	-	XC9110F151ER	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF161	-	XC9110F161ER	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF171	-	XC9110F171ER	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF181	-	XC9110F181ER	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF191	-	XC9110F191ER	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF201	-	XC9110F201ER	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF211	-	XC9110F211ER	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF221	-	XC9110F221ER	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MF231	-	XC9110F231ER	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF241	-	XC9110F241ER	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF251	-	XC9110F251ER	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF261	-	XC9110F261ER	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF271	-	XC9110F271ER	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF281	-	XC9110F281ER	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF291	-	XC9110F291ER	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF301	-	XC9110F301ER	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF311	-	XC9110F311ER	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF321	-	XC9110F321ER	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF331	-	XC9110F331ER	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF341	-	XC9110F341ER	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF351	-	XC9110F351ER	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF361	-	XC9110F361ER	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF371	-	XC9110F371ER	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF381	-	XC9110F381ER	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF391	-	XC9110F391ER	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF401	-	XC9110F401ER	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF411	-	XC9110F411ER	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF421	-	XC9110F421ER	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF431	-	XC9110F431ER	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF441	-	XC9110F441ER	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF451	-	XC9110F451ER	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF461	-	XC9110F461ER	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF471	-	XC9110F471ER	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF481	-	XC9110F481ER	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF491	-	XC9110F491ER	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF501	-	XC9110F501ER	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF511	-	XC9110F511ER	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF521	-	XC9110F521ER	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF531	-	XC9110F531ER	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF541	-	XC9110F541ER	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF551	-	XC9110F551ER	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF561	-	XC9110F561ER	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF571	-	XC9110F571ER	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF581	-	XC9110F581ER	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF591	-	XC9110F591ER	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF601	-	XC9110F601ER	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF611	-	XC9110F611ER	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF621	-	XC9110F621ER	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF631	-	XC9110F631ER	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF641	-	XC9110F641ER	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF651	-	XC9110F651ER	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF661	-	XC9110F661ER	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF671	-	XC9110F671ER	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF681	-	XC9110F681ER	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF691	-	XC9110F691ER	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF701	-	XC9110F701ER	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
MF8	-	MIC5370-2.8/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
MF8	-	XC9237C08D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MF8	-	XC9237C08D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MF8	-	XC9237C08DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MF8	-	XCL207C083AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 0.8V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MF9	-	XC9237C09D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MF9	-	XC9237C09D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MF9	-	XC9237C09DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MF9	-	XCL207C093AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 0.9V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MFL	-	XC9237C0LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MFL	-	XC9237C0LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MFL	-	XC9237C0LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MFL	-	XCL207C0L3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 0.85V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MFM	-	XC9237C0MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MFM	-	XC9237C0MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MFM	-	XC9237C0MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MFM	-	XCL207C0M3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 0.95V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MFZ	mb	MIC5310-2.8/1.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
MG	-	MIC2211-2.8/1.8BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(150mA)/1.8V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
MG	-	MIC5381-2.8/1.8YFT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 150mA, +CE, CL	MLF-6A	81g5	VR19	9x	Mcr
MG	-	R1118K131B	LVR-IC	1.3V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MG	-	RP107K401D	LVR-IC	LDO, 4.0V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MG8	-	MIC5370-2.8/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
MGZ	mb	MIC5310-2.8/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
MH	-	R1118K141B	LVR-IC	1.4V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MH	-	RP107K411D	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
MH0	-	XC9237C10D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MH0	-	XC9237C10D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MH0	-	XC9237C10DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MH0	-	XCL207C103AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.0V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MH1	-	XC9237C11D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MH1	-	XC9237C11D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MH1	-	XC9237C11DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MH1	-	XCL207C113AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.1V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MH2	-	XC9237C12D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MH2	-	XC9237C12D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MH2	-	XC9237C12DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MH2	-	XCL207C123AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.2V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MH3	-	XC9237C13D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MH3	-	XC9237C13D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MH3	-	XC9237C13DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MH3	-	XCL207C133AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.3V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MH4	-	XC9237C14D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MH4	-	XC9237C14D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MH4	-	XC9237C14DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MH4	-	XCL207C143AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.4V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MH5	-	XC9237C15D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MH5	-	XC9237C15D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MH5	-	XC9237C15DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MH5	-	XCL207C153AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.5V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MH6	-	XC9237C16D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MH6	-	XC9237C16D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MH6	-	XC9237C16DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MH6	-	XCL207C163AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.6V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MH7	-	XC9237C17D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MH7	-	XC9237C17D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MH7	-	XC9237C17DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MH7	-	XCL207C173AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.7V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MH8	-	XC9237C18D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MH8	-	XC9237C18D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MH8	-	XC9237C18DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MH8	-	XCL207C183AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.8V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MH9	-	XC9237C19D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MH9	-	XC9237C19D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MH9	-	XC9237C19DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MH9	-	XCL207C193AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.9V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MHA	-	XC9237C1AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MHA	-	XC9237C1AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MHA	-	XC9237C1ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MHA	-	XCL207C1A3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.05V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MHB	-	XC9237C1BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MHB	-	XC9237C1BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MHB	-	XC9237C1BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MHB	-	XCL207C1B3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.15V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MHC	-	XC9237C1CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MHC	-	XC9237C1CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MHC	-	XC9237C1CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MHC	-	XCL207C1C3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.25V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MHD	-	XC9237C1DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MHD	-	XC9237C1DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MHD	-	XC9237C1DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MHD	-	XCL207C1D3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.35V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MHE	-	XC9237C1ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MHE	-	XC9237C1ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MHE	-	XC9237C1EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MHE	-	XCL207C1E3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.45V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MHF	-	XC9237C1FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MHF	-	XC9237C1FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MHF	-	XC9237C1FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MHF	-	XCL207C1F3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.55V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MHH	-	XC9237C1HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MHH	-	XC9237C1HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MHH	-	XC9237C1HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MHH	-	XCL207C1H3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.65V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MHK	-	XC9237C1KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MHK	-	XC9237C1KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MHK	-	XC9237C1KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MHK	-	XCL207C1K3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.75V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MHL	-	XC9237C1LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MHL	-	XC9237C1LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MHL	-	XC9237C1LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MHL	-	XCL207C1L3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.85V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MHM	-	XC9237C1MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MHM	-	XC9237C1MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MHM	-	XC9237C1MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MHM	-	XCL207C1M3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 1.95V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
ml	-	BU1AUA3WNVX	LVR-IC	LDO, 1.05V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
MI	-	NX3L1T3157GM	CMOS-Log	Single-pole double-throw analog switch	SOT886	57	Log38	9z	Nxp
MJ	-	MIC2211-2.8/2.5BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(150mA)/2.5V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
MJ	-	NX3L1G3157GM	CMOS-Log	Single-pole double-throw analog switch	SOT886	57	Log38	9z	Nxp
MJ	-	R1118K151B	LVR-IC	1.5V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MJ	-	RP107K421D	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
MK	-	MAX8840ELT26+T	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	DFN-6	52	VR7a	9t	Max
MK	-	MIC5381-3.3/3.3YFT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±2%, 150mA, +CE, CL	MLF-6A	81g5	VR19	9x	Mcr
MK	-	R1118K161B	LVR-IC	1.6V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MK	-	RP107K121D5	LVR-IC	LDO, 1.25V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
MK0	-	XC9237C20D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MK0	-	XC9237C20D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MK0	-	XC9237C20DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MK0	-	XCL207C203AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.0V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MK1	-	XC9237C21D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MK1	-	XC9237C21D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MK1	-	XC9237C21DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MK1	-	XCL207C213AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.1V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MK2	-	XC9237C22D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MK2	-	XC9237C22D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MK2	-	XC9237C22DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MK2	-	XCL207C223AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.2V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MK3	-	XC9237C23D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MK3	-	XC9237C23D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MK3	-	XC9237C23DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MK3	-	XCL207C233AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.3V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MK4	-	XC9237C24D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MK4	-	XC9237C24D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MK4	-	XC9237C24DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MK4	-	XCL207C243AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.4V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MK5	-	XC9237C25D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MK5	-	XC9237C25D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MK5	-	XC9237C25DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MK5	-	XCL207C253AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.5V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MK6	-	XC9237C26D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MK6	-	XC9237C26D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MK6	-	XC9237C26DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MK6	-	XCL207C263AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.6V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MK7	-	XC9237C27D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MK7	-	XC9237C27D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MK7	-	XC9237C27DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MK7	-	XCL207C273AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.7V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MK8	-	XC9237C28D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MK8	-	XC9237C28D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MK8	-	XC9237C28DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MK8	-	XCL207C283AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.8V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MK9	-	XC9237C29D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MK9	-	XC9237C29D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MK9	-	XC9237C29DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MK9	-	XCL207C293AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.9V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MKA	-	XC9237C2AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MKA	-	XC9237C2AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MKA	-	XC9237C2ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MKA	-	XCL207C2A3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.05V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MKB	-	XC9237C2BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MKB	-	XC9237C2BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MKB	-	XC9237C2BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MKB	-	XCL207C2B3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.15V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MKC	-	XC9237C2CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MKC	-	XC9237C2CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MKC	-	XC9237C2CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MKC	-	XCL207C2C3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.25V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MKD	-	XC9237C2DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MKD	-	XC9237C2DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MKD	-	XC9237C2DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MKD	-	XCL207C2D3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.35V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MKE	-	XC9237C2ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MKE	-	XC9237C2ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MKE	-	XC9237C2EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MKE	-	XCL207C2E3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.45V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MKF	-	XC9237C2FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MKF	-	XC9237C2FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MKF	-	XC9237C2FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MKF	-	XCL207C2F3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.55V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MKH	-	XC9237C2HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MKH	-	XC9237C2HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MKH	-	XC9237C2HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MKH	-	XCL207C2H3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.65V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MKK	-	XC9237C2KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MKK	-	XC9237C2KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MKK	-	XC9237C2KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MKK	-	XCL207C2K3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.75V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MKL	-	XC9237C2LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MKL	-	XC9237C2LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MKL	-	XC9237C2LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MKL	-	XCL207C2L3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.85V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MKM	-	XC9237C2MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MKM	-	XC9237C2MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MKM	-	XC9237C2MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MKM	-	XCL207C2M3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 2.95V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MKZ	mb	MIC5310-2.8/2.6YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.6V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
ML	-	MAX8840ELT31+T	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	DFN-6	52	VR7a	9t	Max
ML	-	NX3L1G384GM	CMOS-Log	Single-pole single-throw analog switch	SOT886	57	Log86	9z	Nxp
ML	-	R1118K171B	LVR-IC	1.7V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
ML	-	RP107K181D5	LVR-IC	LDO, 1.85V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
ML0	-	XC9237C30D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ML0	-	XC9237C30D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ML0	-	XC9237C30DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
ML0	-	XCL207C303AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.0V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
ML1	-	XC9237C31D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ML1	-	XC9237C31D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ML1	-	XC9237C31DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
ML1	-	XCL207C313AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.1V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
ML2	-	NX3L2G384GM	CMOS-Log	2-channel analog switch	SOT902-1	51	Log68	9z	Nxp
ML2	-	NX3L2G384GT	CMOS-Log	2-channel analog switch	SOT833-1	53	Log68	9z	Nxp
ML2	-	XC9237C32D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ML2	-	XC9237C32D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ML2	-	XC9237C32DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
ML2	-	XCL207C323AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.2V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
ML3	-	XC9237C33D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ML3	-	XC9237C33D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ML3	-	XC9237C33DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
ML3	-	XCL207C333AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.3V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
ML4	-	XC9237C34D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ML4	-	XC9237C34D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ML4	-	XC9237C34DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
ML4	-	XCL207C343AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.4V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
ML5	-	XC9237C35D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ML5	-	XC9237C35D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ML5	-	XC9237C35DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
ML5	-	XCL207C353AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.5V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
ML6	-	XC9237C36D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ML6	-	XC9237C36D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ML6	-	XC9237C36DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
ML6	-	XCL207C363AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.6V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
ML7	-	XC9237C37D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ML7	-	XC9237C37D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ML7	-	XC9237C37DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
ML7	-	XCL207C373AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.7V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
ML8	-	XC9237C38D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ML8	-	XC9237C38D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ML8	-	XC9237C38DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
ML8	-	XCL207C383AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.8V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
ML9	-	XC9237C39D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
ML9	-	XC9237C39D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
ML9	-	XC9237C39DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
ML9	-	XCL207C393AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.9V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MLA	-	XC9237C3AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MLA	-	XC9237C3AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MLA	-	XC9237C3ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MLA	-	XCL207C3A3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.05V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MLB	-	XC9237C3BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MLB	-	XC9237C3BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MLB	-	XC9237C3BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MLB	-	XCL207C3B3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.15V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MLC	-	XC9237C3CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MLC	-	XC9237C3CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MLC	-	XC9237C3CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MLC	-	XCL207C3C3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.25V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MLD	-	XC9237C3DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MLD	-	XC9237C3DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MLD	-	XC9237C3DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MLD	-	XCL207C3D3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.35V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MLE	-	XC9237C3ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MLE	-	XC9237C3ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MLE	-	XC9237C3EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MLE	-	XCL207C3E3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.45V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MLF	-	XC9237C3FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MLF	-	XC9237C3FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MLF	-	XC9237C3FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MLF	-	XCL207C3F3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.55V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MLH	-	XC9237C3HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MLH	-	XC9237C3HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MLH	-	XC9237C3HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MLH	-	XCL207C3H3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.65V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MLK	-	XC9237C3KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MLK	-	XC9237C3KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MLK	-	XC9237C3KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MLK	-	XCL207C3K3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.75V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MLL	-	XC9237C3LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MLL	-	XC9237C3LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MLL	-	XC9237C3LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MLL	-	XCL207C3L3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.85V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MLM	-	XC9237C3MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MLM	-	XC9237C3MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MLM	-	XC9237C3MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MLM	-	XCL207C3M3AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 3.95V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MM	-	BAR64-02L	PIN-diode	Sw, RF-att, 150V, 100mA, Vf<1.1V(50mA), < 0.35pF	TSLP-2-1	13d	-	2b	Inf
MM	-	MAX8840ELT33+T	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	DFN-6	52	VR7a	9t	Max
MM	-	MIC2211-2.8/2.8BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(150mA)/2.8V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
MM	-	R1118K181B	LVR-IC	1.8V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MM	-	RP107K281D5	LVR-IC	LDO, 2.85V±1%, 200mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
MM0	-	XC9237C40D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	WLP-5-03	56aa*	DC1	9a	Tor
MM0	-	XC9237C40D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6EL	56dc5	DC1	9a	Tor
MM0	-	XC9237C40DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>2V, LSST, CL	USP-6C	49dc5	DC1	9a	Tor
MM0	-	XCL207C403AR-G	DC-DC-IC	PWM-PWM/PFM step-down, 3MHz, 4.0V±2%, 600mA, CL, soft start	CL-2025	67dc7	DC9	9a	Tor
MM8	-	MIC5370-2.8/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
MMZ	mb	MIC5310-2.8/2.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
MN	-	MAX8840ELT16+T	LVR-IC	LDO, 1.6V±2%, 150mA, +CE	DFN-6	52	VR7a	9t	Max
MN	-	R1118K181B5	LVR-IC	1.85V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MN8	-	XC9237D08C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MN8	-	XC9237D08C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MN8	-	XC9237D08CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MN9	-	XC9237D09C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MN9	-	XC9237D09C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MN9	-	XC9237D09CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MNL	-	XC9237D0LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MNL	-	XC9237D0LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MNL	-	XC9237D0LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MNM	-	XC9237D0MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MNM	-	XC9237D0MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MNM	-	XC9237D0MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MO	-	MAX8840ELT18+T	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	DFN-6	52	VR7a	9t	Max
MP	-	MAX8840ELT25+T	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	DFN-6	52	VR7a	9t	Max
MP	-	MIC2211-2.8/3.0BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(150mA)/3.0V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
MP	-	R1118K191B	LVR-IC	1.9V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MP0	-	XC9237D10C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MP0	-	XC9237D10C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MP0	-	XC9237D10CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MP1	-	XC9237D11C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MP1	-	XC9237D11C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MP1	-	XC9237D11CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MP2	-	XC9237D12C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MP2	-	XC9237D12C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MP2	-	XC9237D12CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MP3	-	XC9237D13C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MP3	-	XC9237D13C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MP3	-	XC9237D13CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MP4	-	XC9237D14C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MP4	-	XC9237D14C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MP4	-	XC9237D14CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MP5	-	XC9237D15C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MP5	-	XC9237D15C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MP5	-	XC9237D15CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MP6	-	XC9237D16C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MP6	-	XC9237D16C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MP6	-	XC9237D16CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MP7	-	XC9237D17C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MP7	-	XC9237D17C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MP7	-	XC9237D17CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MP8	-	XC9237D18C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MP8	-	XC9237D18C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MP8	-	XC9237D18CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MP9	-	XC9237D19C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MP9	-	XC9237D19C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MP9	-	XC9237D19CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MPA	-	XC9237D1AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MPA	-	XC9237D1AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MPA	-	XC9237D1ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MPB	-	XC9237D1BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MPB	-	XC9237D1BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MPB	-	XC9237D1BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MPC	-	XC9237D1CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MPC	-	XC9237D1CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MPC	-	XC9237D1CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MPD	-	XC9237D1DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MPD	-	XC9237D1DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MPD	-	XC9237D1DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MPE	-	XC9237D1EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MPE	-	XC9237D1EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MPE	-	XC9237D1ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MPF	-	MIC5335-2.8/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
MPF	-	XC9237D1FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MPF	-	XC9237D1FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MPF	-	XC9237D1FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MPG	-	MIC5335-2.8/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
MPH	-	XC9237D1HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MPH	-	XC9237D1HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MPH	-	XC9237D1HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MPK	-	MIC5335-2.8/2.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.6V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
MPK	-	XC9237D1KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MPK	-	XC9237D1KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MPK	-	XC9237D1KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MPL	-	XC9237D1LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MPL	-	XC9237D1LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MPL	-	XC9237D1LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MPM	-	MIC5335-2.8/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
MPM	-	XC9237D1MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MPM	-	XC9237D1MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MPM	-	XC9237D1MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MQ	-	MAX8841ELT15+T	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	DFN-6	52ys	VR4	9t	Max
MQ	-	R1118K201B	LVR-IC	2V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MR	-	MAX8841ELT18+T	LVR-IC	LDO, 1.8V±2%, 150mA, +CE	DFN-6	52ys	VR4	9t	Max
MR	-	R1118K211B	LVR-IC	2.1V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MR0	-	XC9237D20C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MR0	-	XC9237D20C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MR0	-	XC9237D20CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MR1	-	XC9237D21C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MR1	-	XC9237D21C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MR1	-	XC9237D21CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MR2	-	XC9237D22C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MR2	-	XC9237D22C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MR2	-	XC9237D22CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MR3	-	XC9237D23C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MR3	-	XC9237D23C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MR3	-	XC9237D23CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MR4	-	XC9237D24C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MR4	-	XC9237D24C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MR4	-	XC9237D24CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MR5	-	XC9237D25C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MR5	-	XC9237D25C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MR5	-	XC9237D25CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MR6	-	XC9237D26C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MR6	-	XC9237D26C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MR6	-	XC9237D26CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MR7	-	XC9237D27C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MR7	-	XC9237D27C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MR7	-	XC9237D27CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MR8	-	XC9237D28C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MR8	-	XC9237D28C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MR8	-	XC9237D28CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MR9	-	XC9237D29C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MR9	-	XC9237D29C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MR9	-	XC9237D29CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MRA	-	XC9237D2AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MRA	-	XC9237D2AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MRA	-	XC9237D2ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MRA	mh	NCP2824FC	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.4W(5V/4Ω), shutdown	BGA-9	39	-	9o	Ons
MRAG	-	NCP2824FC	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.4W(5V/4Ω), shutdown	BGA-9	39	-	9o	Ons
MRB	-	XC9237D2BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MRB	-	XC9237D2BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MRB	-	XC9237D2BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MRC	-	XC9237D2CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MRC	-	XC9237D2CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MRC	-	XC9237D2CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MRD	-	XC9237D2DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MRD	-	XC9237D2DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MRD	-	XC9237D2DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MRE	-	XC9237D2EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MRE	-	XC9237D2EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MRE	-	XC9237D2ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MRF	-	XC9237D2FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MRF	-	XC9237D2FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MRF	-	XC9237D2FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MRH	-	NCP2991FC	Lin-IC	AF PA, BTL 2.2..5.5V, 1.35W(5V/8Ω), shutdown	BGA-9	39	AFP44	9o	Ons
MRH	-	XC9237D2HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MRH	-	XC9237D2HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MRH	-	XC9237D2HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MRK	-	XC9237D2KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MRK	-	XC9237D2KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MRK	-	XC9237D2KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MRL	-	XC9237D2LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MRL	-	XC9237D2LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MRL	-	XC9237D2LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MRM	-	XC9237D2MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MRM	-	XC9237D2MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MRM	-	XC9237D2MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MS	-	MAX8841ELT25+T	LVR-IC	LDO, 2.5V±2%, 150mA, +CE	DFN-6	52ys	VR4	9t	Max
MS	-	MIC2211-2.8/3.3BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(150mA)/3.3V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
MS	-	R1118K221B	LVR-IC	2.2V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MS0	-	XC9237D30C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MS0	-	XC9237D30C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MS0	-	XC9237D30CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MS1	-	XC9237D31C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MS1	-	XC9237D31C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MS1	-	XC9237D31CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MS2	-	XC9237D32C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MS2	-	XC9237D32C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MS2	-	XC9237D32CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MS3	-	XC9237D33C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MS3	-	XC9237D33C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MS3	-	XC9237D33CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MS4	-	XC9237D34C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MS4	-	XC9237D34C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MS4	-	XC9237D34CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MS5	-	XC9237D35C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MS5	-	XC9237D35C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MS5	-	XC9237D35CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MS6	-	XC9237D36C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MS6	-	XC9237D36C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MS6	-	XC9237D36CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MS7	-	XC9237D37C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MS7	-	XC9237D37C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MS7	-	XC9237D37CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MS8	-	XC9237D38C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MS8	-	XC9237D38C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MS8	-	XC9237D38CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MS9	-	XC9237D39C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MS9	-	XC9237D39C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MS9	-	XC9237D39CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MSA	-	XC9237D3AC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MSA	-	XC9237D3AC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MSA	-	XC9237D3ACER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MSB	-	XC9237D3BC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MSB	-	XC9237D3BC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MSB	-	XC9237D3BCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MSC	-	XC9237D3CC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MSC	-	XC9237D3CC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MSC	-	XC9237D3CCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MSD	-	XC9237D3DC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MSD	-	XC9237D3DC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MSD	-	XC9237D3DCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MSE	-	XC9237D3EC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MSE	-	XC9237D3EC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MSE	-	XC9237D3ECER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MSF	-	XC9237D3FC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MSF	-	XC9237D3FC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MSF	-	XC9237D3FCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MSH	-	XC9237D3HC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MSH	-	XC9237D3HC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MSH	-	XC9237D3HCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MSK	-	XC9237D3KC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MSK	-	XC9237D3KC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MSK	-	XC9237D3KCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MSL	-	XC9237D3LC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MSL	-	XC9237D3LC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MSL	-	XC9237D3LCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MSM	-	XC9237D3MC0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MSM	-	XC9237D3MC4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MSM	-	XC9237D3MCER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MT	-	MAX8841ELT26+T	LVR-IC	LDO, 2.6V±2%, 150mA, +CE	DFN-6	52ys	VR4	9t	Max
MT	-	R1118K231B	LVR-IC	2.3V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MT0	-	XC9237D40C0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MT0	-	XC9237D40C4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MT0	-	XC9237D40CER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 1.2MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MU	-	MAX8841ELT28+T	LVR-IC	LDO, 2.8V±2%, 150mA, +CE	DFN-6	52ys	VR4	9t	Max

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MU	-	R1118K241B	LVR-IC	2.4V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MU8	-	XC9237D08D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MU8	-	XC9237D08D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MU8	-	XC9237D08DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MU9	-	XC9237D09D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MU9	-	XC9237D09D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MU9	-	XC9237D09DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MUL	-	XC9237D0LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MUL	-	XC9237D0LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MUL	-	XC9237D0LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MUM	-	XC9237D0MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MUM	-	XC9237D0MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MUM	-	XC9237D0MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 0.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MV	-	MAX8841ELT29+T	LVR-IC	LDO, 2.85V±2%, 150mA, +CE	DFN-6	52ys	VR4	9t	Max
MV	-	R1118K251B	LVR-IC	2.5V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MV0	-	XC9237D10D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MV0	-	XC9237D10D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MV0	-	XC9237D10DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MV1	-	XC9237D11D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MV1	-	XC9237D11D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MV1	-	XC9237D11DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MV2	-	XC9237D12D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MV2	-	XC9237D12D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MV2	-	XC9237D12DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MV3	-	XC9237D13D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MV3	-	XC9237D13D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MV3	-	XC9237D13DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MV4	-	XC9237D14D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MV4	-	XC9237D14D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MV4	-	XC9237D14DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MV5	-	XC9237D15D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MV5	-	XC9237D15D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MV5	-	XC9237D15DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MV6	-	XC9237D16D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MV6	-	XC9237D16D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MV6	-	XC9237D16DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MV7	-	XC9237D17D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MV7	-	XC9237D17D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MV7	-	XC9237D17DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MV8	-	XC9237D18D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MV8	-	XC9237D18D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MV8	-	XC9237D18DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MV9	-	XC9237D19D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MV9	-	XC9237D19D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MV9	-	XC9237D19DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MVA	-	XC9237D1AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MVA	-	XC9237D1AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MVA	-	XC9237D1ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MVB	-	XC9237D1BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MVB	-	XC9237D1BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MVB	-	XC9237D1BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MVC	-	XC9237D1CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MVC	-	XC9237D1CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MVC	-	XC9237D1CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MVD	-	XC9237D1DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MVD	-	XC9237D1DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MVD	-	XC9237D1DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MVE	-	XC9237D1ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MVE	-	XC9237D1ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MVE	-	XC9237D1EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MVF	-	XC9237D1FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MVF	-	XC9237D1FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MVF	-	XC9237D1FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MVH	-	XC9237D1HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MVH	-	XC9237D1HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MVH	-	XC9237D1HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MVK	-	XC9237D1KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MVK	-	XC9237D1KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MVK	-	XC9237D1KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MVL	-	XC9237D1LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MVL	-	XC9237D1LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MVL	-	XC9237D1LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MVM	-	XC9237D1MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MVM	-	XC9237D1MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MVM	-	XC9237D1MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 1.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MW	-	MAX8841ELT89+T	LVR-IC	LDO, 2.9V±2%, 150mA, +CE	DFN-6	52ys	VR4	9t	Max
MW	-	MIC2211-2.8/1.6BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V(150mA)/1.6V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
MW	-	R1118K261B	LVR-IC	2.6V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MX	-	MAX8841ELT31+T	LVR-IC	LDO, 3.1V±2%, 150mA, +CE	DFN-6	52ys	VR4	9t	Max
MX	-	R1118K271B	LVR-IC	2.7V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MX0	-	XC9237D20D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MX0	-	XC9237D20D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MX0	-	XC9237D20DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MX1	-	XC9237D21D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MX1	-	XC9237D21D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MX1	-	XC9237D21DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MX2	-	XC9237D22D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MX2	-	XC9237D22D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MX2	-	XC9237D22DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MX3	-	XC9237D23D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MX3	-	XC9237D23D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MX3	-	XC9237D23DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MX4	-	XC9237D24D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MX4	-	XC9237D24D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MX4	-	XC9237D24DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MX5	-	XC9237D25D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MX5	-	XC9237D25D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MX5	-	XC9237D25DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MX6	-	XC9237D26D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MX6	-	XC9237D26D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MX6	-	XC9237D26DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MX7	-	XC9237D27D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MX7	-	XC9237D27D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MX7	-	XC9237D27DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MX8	-	XC9237D28D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MX8	-	XC9237D28D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MX8	-	XC9237D28DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MX9	-	XC9237D29D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MX9	-	XC9237D29D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MX9	-	XC9237D29DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MXA	-	XC9237D2AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MXA	-	XC9237D2AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MXA	-	XC9237D2ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MXB	-	XC9237D2BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MXB	-	XC9237D2BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MXB	-	XC9237D2BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MXC	-	XC9237D2CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MXC	-	XC9237D2CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MXC	-	XC9237D2CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MXD	-	XC9237D2DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MXD	-	XC9237D2DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MXD	-	XC9237D2DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MXE	-	XC9237D2ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MXE	-	XC9237D2ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MXE	-	XC9237D2EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MXF	-	XC9237D2FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MXF	-	XC9237D2FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MXF	-	XC9237D2FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MXH	-	XC9237D2HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MXH	-	XC9237D2HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MXH	-	XC9237D2HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MXK	-	XC9237D2KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MXK	-	XC9237D2KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MXK	-	XC9237D2KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MXL	-	XC9237D2LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MXL	-	XC9237D2LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MXL	-	XC9237D2LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MXM	-	XC9237D2MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MXM	-	XC9237D2MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MXM	-	XC9237D2MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 2.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
MY	-	MAX8841ELT33+T	LVR-IC	LDO, 3.3V±2%, 150mA, +CE	DFN-6	52ys	VR4	9t	Max
MY	-	R1118K281B	LVR-IC	2.8V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MY0	-	XC9237D30D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MY0	-	XC9237D30D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MY0	-	XC9237D30DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MY1	-	XC9237D31D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MY1	-	XC9237D31D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MY1	-	XC9237D31DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.1V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MY2	-	XC9237D32D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MY2	-	XC9237D32D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MY2	-	XC9237D32DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.2V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MY3	-	XC9237D33D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MY3	-	XC9237D33D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MY3	-	XC9237D33DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.3V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MY4	-	XC9237D34D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MY4	-	XC9237D34D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MY4	-	XC9237D34DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.4V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MY5	-	XC9237D35D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MY5	-	XC9237D35D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MY5	-	XC9237D35DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.5V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MY6	-	XC9237D36D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MY6	-	XC9237D36D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MY6	-	XC9237D36DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.6V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MY7	-	XC9237D37D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MY7	-	XC9237D37D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MY7	-	XC9237D37DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.7V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MY8	-	XC9237D38D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MY8	-	XC9237D38D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MY8	-	XC9237D38DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.8V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MY9	-	XC9237D39D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MY9	-	XC9237D39D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MY9	-	XC9237D39DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.9V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MYA	-	XC9237D3AD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MYA	-	XC9237D3AD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MYA	-	XC9237D3ADER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.05V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MYB	-	XC9237D3BD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MYB	-	XC9237D3BD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MYB	-	XC9237D3BDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.15V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MYC	-	XC9237D3CD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MYC	-	XC9237D3CD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MYC	-	XC9237D3CDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.25V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MYD	-	XC9237D3DD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MYD	-	XC9237D3DD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MYD	-	XC9237D3DDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.35V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MYE	-	XC9237D3ED0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MYE	-	XC9237D3ED4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MYE	-	XC9237D3EDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.45V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MYF	-	XC9237D3FD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MYF	-	XC9237D3FD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MYF	-	XC9237D3FDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.55V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MYH	-	XC9237D3HD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MYH	-	XC9237D3HD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MYH	-	XC9237D3HDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.65V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MYK	-	XC9237D3KD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MYK	-	XC9237D3KD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MYK	-	XC9237D3KDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.75V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MYL	-	XC9237D3LD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MYL	-	XC9237D3LD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MYL	-	XC9237D3LDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.85V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MYM	-	XC9237D3MD0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MYM	-	XC9237D3MD4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MYM	-	XC9237D3MDER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 3.95V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
MZ	-	MAX8841ELT45+T	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	DFN-6	52ys	VR4	9t	Max
MZ	-	R1118K281B5	LVR-IC	2.85V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
MZ0	-	XC9237D40D0R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	WLP-5-03	56ab*	DC16	9a	Tor
MZ0	-	XC9237D40D4R-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6EL	56da	DC16	9a	Tor
MZ0	-	XC9237D40DER-G	DC-DC-IC	PWM-PWM/PFM, st-dwn, 4.0V±2%, 600mA, 3MHz, Vin>1.8V, LSST, CL	USP-6C	49da	DC16	9a	Tor
n	-	BU28UA3WNVX	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
N	-	UNRL216	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1=4.7k	ML4	31tm	-	2b	Pan
N0	-	ISL9016IRUJJZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/2.8V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N0	-	R3117K273A	Vdet-IC	2.7V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
N0	-	RP114K281B	LVR-IC	LDO, 2.8V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
N0	-	XC6GN3002HR	Vdet-IC	3.0V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
N03	-	XC61GN3002HR	Vdet-IC	3.0V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
N0A	-	XC6108N30AGR	Vdet-IC	3.0V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N0A	-	XC6118C20AGR-G	Vdet-IC	2.0V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
N0B	-	XC6108N30BGR	Vdet-IC	3.0V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N0B	-	XC6118C20BGR-G	Vdet-IC	2.0V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
N0C	-	XC6108N30CGR	Vdet-IC	3.0V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N0C	-	XC6118C20CGR-G	Vdet-IC	2.0V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
N0D	-	XC6108N30DGR	Vdet-IC	3.0V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N0D	-	XC6118C20DGR-G	Vdet-IC	2.0V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
N1	-	ISL9016IRUWKZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/2.85V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
N1	-	LM48311ITL	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 2.6W(5V/4Ω), shutdown	BGA-9	39	-	9a	Nsc
N1	-	LM48312TLE	Lin-IC	AF PA, BTL, class-D, 2.4..5.5V, 2.6W(5V/4Ω), shutdown	BGA-9	39	-	9a	Nsc
N1	-	R3117K283A	Vdet-IC	2.8V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
N1	-	RP114K291B	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
N1	-	XC6GN3102HR	Vdet-IC	3.1V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
N13	-	XC61GN3102HR	Vdet-IC	3.1V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
N15D	-	R1163K151D	LVR-IC	LDO, 1.5V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N16D	-	R1163K161D	LVR-IC	LDO, 1.6V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N17D	-	R1163K171D	LVR-IC	LDO, 1.7V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N185	-	R1163K181D5	LVR-IC	LDO, 1.85V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N18D	-	R1163K181D	LVR-IC	LDO, 1.8V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N19D	-	R1163K191D	LVR-IC	LDO, 1.9V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N1A	-	XC6108N31AGR	Vdet-IC	3.1V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N1A	-	XC6118C21AGR-G	Vdet-IC	2.1V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
N1B	-	XC6108N31BGR	Vdet-IC	3.1V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N1B	-	XC6118C21BGR-G	Vdet-IC	2.1V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
N1C	-	XC6108N31CGR	Vdet-IC	3.1V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N1C	-	XC6118C21CGR-G	Vdet-IC	2.1V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
N1D	-	XC6108N31DGR	Vdet-IC	3.1V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N1D	-	XC6118C21DGR-G	Vdet-IC	2.1V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
N2	-	ISL9016IRUWJZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/2.8V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
N2	-	R3117K293A	Vdet-IC	2.9V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
N2	-	RP114K301B	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
N2	-	XC6GN3202HR	Vdet-IC	3.2V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
N20D	-	R1163K201D	LVR-IC	LDO, 2.0V±1.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N21D	-	R1163K211D	LVR-IC	LDO, 2.1V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N2211	-	NCS2211MN	Lin-IC	AF PA, BTL 2.7..5.5V, 1.5W(5V/4Ω), shutdown	DFN-8	92	AFP11	9a	Ons
N22D	-	R1163K221D	LVR-IC	LDO, 2.2V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N23	-	XC61GN3202HR	Vdet-IC	3.2V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
N23D	-	R1163K231D	LVR-IC	LDO, 2.3V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N24D	-	R1163K241D	LVR-IC	LDO, 2.4V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N25D	-	R1163K251D	LVR-IC	LDO, 2.5V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N26D	-	R1163K261D	LVR-IC	LDO, 2.6V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N27D	-	R1163K271D	LVR-IC	LDO, 2.7V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N285	-	R1163K281D5	LVR-IC	LDO, 2.85V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N28D	-	R1163K281D	LVR-IC	LDO, 2.8V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N29D	-	R1163K291D	LVR-IC	LDO, 2.9V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N2A	-	XC6108N32AGR	Vdet-IC	3.2V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N2A	-	XC6118C22AGR-G	Vdet-IC	2.2V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
N2B	-	XC6108N32BGR	Vdet-IC	3.2V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N2B	-	XC6118C22BGR-G	Vdet-IC	2.2V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
N2C	-	XC6108N32CGR	Vdet-IC	3.2V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N2C	-	XC6118C22CGR-G	Vdet-IC	2.2V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
N2D	-	XC6108N32DGR	Vdet-IC	3.2V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N2D	-	XC6118C22DGR-G	Vdet-IC	2.2V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
N3	-	ISL9016IRUGGZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/2.7V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
N3	-	R3117K303A	Vdet-IC	3.0V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
N3	-	RP114K311B	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
N3	-	XC6GN3302HR	Vdet-IC	3.3V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
N30D	-	R1163K301D	LVR-IC	LDO, 3.0V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N31D	-	R1163K311D	LVR-IC	LDO, 3.1V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N32D	-	R1163K321D	LVR-IC	LDO, 3.2V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N33	-	XC61GN3302HR	Vdet-IC	3.3V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
N33D	-	R1163K331D	LVR-IC	LDO, 3.3V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N34D	-	R1163K341D	LVR-IC	LDO, 3.4V±1.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N35D	-	R1163K351D	LVR-IC	LDO, 3.5V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N36D	-	R1163K361D	LVR-IC	LDO, 3.6V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N37D	-	R1163K371D	LVR-IC	LDO, 3.7V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N38D	-	R1163K381D	LVR-IC	LDO, 3.8V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N39D	-	R1163K391D	LVR-IC	LDO, 3.9V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N3A	-	XC6108N33AGR	Vdet-IC	3.3V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N3A	-	XC6118C23AGR-G	Vdet-IC	2.3V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
N3B	-	XC6108N33BGR	Vdet-IC	3.3V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N3B	-	XC6118C23BGR-G	Vdet-IC	2.3V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
N3C	-	XC6108N33CGR	Vdet-IC	3.3V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N3C	-	XC6118C23CGR-G	Vdet-IC	2.3V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
N3D	-	XC6108N33DGR	Vdet-IC	3.3V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N3D	-	XC6118C23DGR-G	Vdet-IC	2.3V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
N4	-	ISL9016IRUJCZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
N4	-	R3117K313A	Vdet-IC	3.1V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
N4	-	RP114K321B	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
N4	-	XC6GN3402HR	Vdet-IC	3.4V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
N40D	-	R1163K401D	LVR-IC	LDO, 4.0V±2.5%, 150mA, +CE, CL, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
N43	-	XC61GN3402HR	Vdet-IC	3.4V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
N4A	-	XC6108N34AGR	Vdet-IC	3.4V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N4A	-	XC6118C24AGR-G	Vdet-IC	2.4V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
N4B	-	XC6108N34BGR	Vdet-IC	3.4V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N4B	-	XC6118C24BGR-G	Vdet-IC	2.4V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
N4C	-	XC6108N34CGR	Vdet-IC	3.4V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N4C	-	XC6118C24CGR-G	Vdet-IC	2.4V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
N4D	-	XC6108N34DGR	Vdet-IC	3.4V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N4D	-	XC6118C24DGR-G	Vdet-IC	2.4V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
N5	-	ISL9016IRUKKZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.85V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
N5	-	R3117K323A	Vdet-IC	3.2V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
N5	-	RP114K331B	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
N5	-	XC6GN3502HR	Vdet-IC	3.5V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
N53	-	XC61GN3502HR	Vdet-IC	3.5V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
N5A	-	XC6108N35AGR	Vdet-IC	3.5V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N5A	-	XC6118C25AGR-G	Vdet-IC	2.5V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
N5B	-	XC6108N35BGR	Vdet-IC	3.5V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N5B	-	XC6118C25BGR-G	Vdet-IC	2.5V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
N5C	-	XC6108N35CGR	Vdet-IC	3.5V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N5C	-	XC6118C25CGR-G	Vdet-IC	2.5V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
N5D	-	XC6108N35DGR	Vdet-IC	3.5V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N5D	-	XC6118C25DGR-G	Vdet-IC	2.5V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
N6	-	ISL9016IRUWGZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/2.7V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
N6	-	R3117K333A	Vdet-IC	3.3V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
N6	-	RP114K341B	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
N6	-	XC6GN3602HR	Vdet-IC	3.6V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
N63	-	XC61GN3602HR	Vdet-IC	3.6V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
N6A	-	XC6108N36AGR	Vdet-IC	3.6V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N6A	-	XC6118C26AGR-G	Vdet-IC	2.6V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
N6B	-	XC6108N36BGR	Vdet-IC	3.6V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N6B	-	XC6118C26BGR-G	Vdet-IC	2.6V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
N6C	-	XC6108N36CGR	Vdet-IC	3.6V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N6C	-	XC6118C26CGR-G	Vdet-IC	2.6V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
N6D	-	XC6108N36DGR	Vdet-IC	3.6V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N6D	-	XC6118C26DGR-G	Vdet-IC	2.6V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
N7	-	ISL9016IRUWCZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/1.8V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
N7	-	R3117K343A	Vdet-IC	3.4V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
N7	-	RP114K351B	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
N7	-	XC6GN3702HR	Vdet-IC	3.7V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
N73	-	XC61GN3702HR	Vdet-IC	3.7V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
N7A	-	XC6108N37AGR	Vdet-IC	3.7V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N7A	-	XC6118C27AGR-G	Vdet-IC	2.7V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
N7B	-	XC6108N37BGR	Vdet-IC	3.7V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N7B	-	XC6118C27BGR-G	Vdet-IC	2.7V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
N7C	-	XC6108N37CGR	Vdet-IC	3.7V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N7C	-	XC6118C27CGR-G	Vdet-IC	2.7V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
N7D	-	XC6108N37DGR	Vdet-IC	3.7V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N7D	-	XC6118C27DGR-G	Vdet-IC	2.7V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
N8	-	ISL9016IRUFBZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.5V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
N8	-	R3117K353A	Vdet-IC	3.5V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
N8	-	RP114K361B	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
N8	-	XC6GN3802HR	Vdet-IC	3.8V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
N83	-	XC61GN3802HR	Vdet-IC	3.8V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
N8A	-	XC6108N38AGR	Vdet-IC	3.8V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
N8A	-	XC6118C28AGR-G	Vdet-IC	2.8V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
N8B	-	XC6108N38BGR	Vdet-IC	3.8V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N8B	-	XC6118C28BGR-G	Vdet-IC	2.8V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
N8C	-	XC6108N38CGR	Vdet-IC	3.8V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N8C	-	XC6118C28CGR-G	Vdet-IC	2.8V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
N8D	-	XC6108N38DGR	Vdet-IC	3.8V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N8D	-	XC6118C28DGR-G	Vdet-IC	2.8V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
N9	-	ISL9016IRUFCZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.8V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
N9	-	R3117K363A	Vdet-IC	3.6V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
N9	-	RP114K121B5	LVR-IC	LDO, 1.25V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
N9	-	XC6GN3902HR	Vdet-IC	3.9V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
N93	-	XC61GN3902HR	Vdet-IC	3.9V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
N9A	-	XC6108N39AGR	Vdet-IC	3.9V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N9A	-	XC6118C29AGR-G	Vdet-IC	2.9V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
N9B	-	XC6108N39BGR	Vdet-IC	3.9V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
N9B	-	XC6118C29BGR-G	Vdet-IC	2.9V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
N9C	-	XC6108N39CGR	Vdet-IC	3.9V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N9C	-	XC6118C29CGR-G	Vdet-IC	2.9V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
N9D	-	XC6108N39DGR	Vdet-IC	3.9V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
N9D	-	XC6118C29DGR-G	Vdet-IC	2.9V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
NA	-	EUP7201-1.8/2.8U	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±2%, 150mA, +CE	USP-6	49xv	VR19	9m	Eut
NA	-	MAX8842ELT+T	LVR-IC	LDO, Adjustable 1.5..4.5V, 150mA, +CE	DFN-6	52	VR16	9t	Max
NA	-	R1118K291B	LVR-IC	2.9V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
NA	-	RP106K071B	LVR-IC	LDO, 0.7V±0.8%, 400mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
NB	-	R1118K301B	LVR-IC	3V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
NB	-	RP106K081B	LVR-IC	LDO, 0.8V±0.8%, 400mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
NC	-	EUP7201-1.5/2.8U	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±2%, 150mA, +CE	USP-6	49xv	VR19	9m	Eut
NC	-	R1118K311B	LVR-IC	3.1V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
NC	-	RP106K091B	LVR-IC	LDO, 0.9V±0.8%, 400mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
NC151	-	XC9111C151ER	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC161	-	XC9111C161ER	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC171	-	XC9111C171ER	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC181	-	XC9111C181ER	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC191	-	XC9111C191ER	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC201	-	XC9111C201ER	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC211	-	XC9111C211ER	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC221	-	XC9111C221ER	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC231	-	XC9111C231ER	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC241	-	XC9111C241ER	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC251	-	XC9111C251ER	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC261	-	XC9111C261ER	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC271	-	XC9111C271ER	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC281	-	XC9111C281ER	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC291	-	XC9111C291ER	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC301	-	XC9111C301ER	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC311	-	XC9111C311ER	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC321	-	XC9111C321ER	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC331	-	XC9111C331ER	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC341	-	XC9111C341ER	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC351	-	XC9111C351ER	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC361	-	XC9111C361ER	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC371	-	XC9111C371ER	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC381	-	XC9111C381ER	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC391	-	XC9111C391ER	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC401	-	XC9111C401ER	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC411	-	XC9111C411ER	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC421	-	XC9111C421ER	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC431	-	XC9111C431ER	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC441	-	XC9111C441ER	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC451	-	XC9111C451ER	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC461	-	XC9111C461ER	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC471	-	XC9111C471ER	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC481	-	XC9111C481ER	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC491	-	XC9111C491ER	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC501	-	XC9111C501ER	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC511	-	XC9111C511ER	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC521	-	XC9111C521ER	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC531	-	XC9111C531ER	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC541	-	XC9111C541ER	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC551	-	XC9111C551ER	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NC561	-	XC9111C561ER	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC571	-	XC9111C571ER	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC581	-	XC9111C581ER	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC591	-	XC9111C591ER	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC601	-	XC9111C601ER	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC611	-	XC9111C611ER	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC621	-	XC9111C621ER	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC631	-	XC9111C631ER	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC641	-	XC9111C641ER	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC651	-	XC9111C651ER	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC661	-	XC9111C661ER	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC671	-	XC9111C671ER	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC681	-	XC9111C681ER	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC691	-	XC9111C691ER	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC701	-	XC9111C701ER	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA, +CE	USP-6C	49gd	DC3	9b	Tor
NC8	-	XC6222A081ER-G	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NC9	-	XC6222A091ER-G	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCA	-	XC6222A101ER-G	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCB	-	XC6222A111ER-G	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCC	-	XC6222A121ER-G	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCD	-	XC6222A131ER-G	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCE	-	XC6222A141ER-G	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCF	-	XC6222A151ER-G	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCH	-	XC6222A161ER-G	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCK	-	XC6222A171ER-G	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCL	-	XC6222A181ER-G	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCM	-	XC6222A191ER-G	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCN	-	XC6222A201ER-G	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCP	-	XC6222A211ER-G	LVR-IC	LDO, 2.1V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCR	-	XC6222A221ER-G	LVR-IC	LDO, 2.2V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCS	-	XC6222A231ER-G	LVR-IC	LDO, 2.3V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCT	-	XC6222A241ER-G	LVR-IC	LDO, 2.4V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCU	-	XC6222A251ER-G	LVR-IC	LDO, 2.5V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCV	-	XC6222A261ER-G	LVR-IC	LDO, 2.6V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCX	-	XC6222A271ER-G	LVR-IC	LDO, 2.7V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCY	-	XC6222A281ER-G	LVR-IC	LDO, 2.8V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NCZ	-	XC6222A291ER-G	LVR-IC	LDO, 2.9V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
ND	-	EUP7201-2.5/2.8U	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±2%, 150mA, +CE	USP-6	49xv	VR19	9m	Eut
ND	-	R1118K321B	LVR-IC	3.2V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
ND	-	RP106K101B	LVR-IC	LDO, 1.0V±0.8%, 400mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
ND151	-	XC9111D151ER	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND161	-	XC9111D161ER	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND171	-	XC9111D171ER	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND181	-	XC9111D181ER	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND191	-	XC9111D191ER	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND201	-	XC9111D201ER	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND211	-	XC9111D211ER	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND221	-	XC9111D221ER	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND231	-	XC9111D231ER	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND241	-	XC9111D241ER	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND251	-	XC9111D251ER	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND261	-	XC9111D261ER	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND271	-	XC9111D271ER	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND281	-	XC9111D281ER	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND291	-	XC9111D291ER	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND301	-	XC9111D301ER	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND311	-	XC9111D311ER	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND321	-	XC9111D321ER	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND331	-	XC9111D331ER	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND341	-	XC9111D341ER	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND351	-	XC9111D351ER	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND361	-	XC9111D361ER	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND371	-	XC9111D371ER	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND381	-	XC9111D381ER	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND391	-	XC9111D391ER	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND401	-	XC9111D401ER	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND411	-	XC9111D411ER	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND421	-	XC9111D421ER	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND431	-	XC9111D431ER	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND441	-	XC9111D441ER	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ND451	-	XC9111D451ER	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND461	-	XC9111D461ER	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND471	-	XC9111D471ER	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND481	-	XC9111D481ER	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND491	-	XC9111D491ER	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND501	-	XC9111D501ER	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND511	-	XC9111D511ER	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND521	-	XC9111D521ER	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND531	-	XC9111D531ER	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND541	-	XC9111D541ER	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND551	-	XC9111D551ER	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND561	-	XC9111D561ER	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND571	-	XC9111D571ER	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND581	-	XC9111D581ER	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND591	-	XC9111D591ER	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND601	-	XC9111D601ER	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND611	-	XC9111D611ER	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND621	-	XC9111D621ER	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND631	-	XC9111D631ER	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND641	-	XC9111D641ER	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND651	-	XC9111D651ER	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND661	-	XC9111D661ER	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND671	-	XC9111D671ER	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND681	-	XC9111D681ER	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND691	-	XC9111D691ER	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND701	-	XC9111D701ER	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA, +CE	USP-6C	49gg	DC6	9b	Tor
ND8	-	XC6222A08BER-G	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
ND9	-	XC6222A09BER-G	LVR-IC	LDO, 0.95V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDA	-	XC6222A10BER-G	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDB	-	XC6222A11BER-G	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDC	-	XC6222A12BER-G	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDD	-	XC6222A13BER-G	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDE	-	XC6222A14BER-G	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDF	-	XC6222A15BER-G	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDH	-	XC6222A16BER-G	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDK	-	XC6222A17BER-G	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDL	-	XC6222A18BER-G	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDM	-	XC6222A19BER-G	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDN	-	XC6222A20BER-G	LVR-IC	LDO, 2.05V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDP	-	XC6222A21BER-G	LVR-IC	LDO, 2.15V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDR	-	XC6222A22BER-G	LVR-IC	LDO, 2.25V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDS	-	XC6222A23BER-G	LVR-IC	LDO, 2.35V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDT	-	XC6222A24BER-G	LVR-IC	LDO, 2.45V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDU	-	XC6222A25BER-G	LVR-IC	LDO, 2.55V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDV	-	XC6222A26BER-G	LVR-IC	LDO, 2.65V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDX	-	XC6222A27BER-G	LVR-IC	LDO, 2.75V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDY	-	XC6222A28BER-G	LVR-IC	LDO, 2.85V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDZ	-	XC6222A29BER-G	LVR-IC	LDO, 2.95V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NDZ	mb	MIC5310-2.85/1.85YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.85V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
NE	-	R1118K331B	LVR-IC	3.3V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
NE	-	RP106K111B	LVR-IC	LDO, 1.1V±0.8%, 400mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
NE0	-	XC6222A301ER-G	LVR-IC	LDO, 3.0V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NE1	-	XC6222A311ER-G	LVR-IC	LDO, 3.1V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NE151	-	XC9111E151ER	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE161	-	XC9111E161ER	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE171	-	XC9111E171ER	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE181	-	XC9111E181ER	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE191	-	XC9111E191ER	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE2	-	XC6222A321ER-G	LVR-IC	LDO, 3.2V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NE201	-	XC9111E201ER	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE211	-	XC9111E211ER	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE221	-	XC9111E221ER	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE231	-	XC9111E231ER	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE241	-	XC9111E241ER	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE251	-	XC9111E251ER	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE261	-	XC9111E261ER	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE271	-	XC9111E271ER	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE281	-	XC9111E281ER	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE291	-	XC9111E291ER	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE3	-	XC6222A331ER-G	LVR-IC	LDO, 3.3V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NE301	-	XC9111E301ER	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE311	-	XC9111E311ER	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE321	-	XC9111E321ER	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE331	-	XC9111E331ER	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE341	-	XC9111E341ER	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE351	-	XC9111E351ER	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE361	-	XC9111E361ER	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE371	-	XC9111E371ER	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE381	-	XC9111E381ER	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE391	-	XC9111E391ER	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE4	-	XC6222A341ER-G	LVR-IC	LDO, 3.4V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NE401	-	XC9111E401ER	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE411	-	XC9111E411ER	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE421	-	XC9111E421ER	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE431	-	XC9111E431ER	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE441	-	XC9111E441ER	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE451	-	XC9111E451ER	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE461	-	XC9111E461ER	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE471	-	XC9111E471ER	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE481	-	XC9111E481ER	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE491	-	XC9111E491ER	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE5	-	XC6222A351ER-G	LVR-IC	LDO, 3.5V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NE501	-	XC9111E501ER	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE511	-	XC9111E511ER	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE521	-	XC9111E521ER	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE531	-	XC9111E531ER	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE541	-	XC9111E541ER	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE551	-	XC9111E551ER	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE561	-	XC9111E561ER	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE571	-	XC9111E571ER	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE581	-	XC9111E581ER	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE591	-	XC9111E591ER	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE6	-	XC6222A361ER-G	LVR-IC	LDO, 3.6V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NE601	-	XC9111E601ER	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE611	-	XC9111E611ER	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE621	-	XC9111E621ER	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE631	-	XC9111E631ER	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE641	-	XC9111E641ER	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE651	-	XC9111E651ER	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE661	-	XC9111E661ER	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE671	-	XC9111E671ER	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE681	-	XC9111E681ER	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE691	-	XC9111E691ER	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE7	-	XC6222A371ER-G	LVR-IC	LDO, 3.7V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NE701	-	XC9111E701ER	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA	USP-6C	49ge	DC4	9b	Tor
NE8	-	XC6222A381ER-G	LVR-IC	LDO, 3.8V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NE9	-	XC6222A391ER-G	LVR-IC	LDO, 3.9V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NEA	-	XC6222A401ER-G	LVR-IC	LDO, 4.0V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NEB	-	XC6222A411ER-G	LVR-IC	LDO, 4.1V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NEC	-	XC6222A421ER-G	LVR-IC	LDO, 4.2V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NED	-	XC6222A431ER-G	LVR-IC	LDO, 4.3V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NEE	-	XC6222A441ER-G	LVR-IC	LDO, 4.4V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NEF	-	XC6222A451ER-G	LVR-IC	LDO, 4.5V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NEH	-	XC6222A461ER-G	LVR-IC	LDO, 4.6V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NEK	-	XC6222A471ER-G	LVR-IC	LDO, 4.7V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NEL	-	XC6222A481ER-G	LVR-IC	LDO, 4.8V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NEM	-	XC6222A491ER-G	LVR-IC	LDO, 4.9V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NEN	-	XC6222A501ER-G	LVR-IC	LDO, 5.0V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NF	-	R1118K341B	LVR-IC	3.4V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
NF	-	RP106K121B	LVR-IC	LDO, 1.2V±0.8%, 400mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
NF0	-	XC6222A30BER-G	LVR-IC	LDO, 3.05V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NF1	-	XC6222A31BER-G	LVR-IC	LDO, 3.15V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NF151	-	XC9111F151ER	DC-DC-IC	PFM step-up, 100kHz, 1.5V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF161	-	XC9111F161ER	DC-DC-IC	PFM step-up, 100kHz, 1.6V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF171	-	XC9111F171ER	DC-DC-IC	PFM step-up, 100kHz, 1.7V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF181	-	XC9111F181ER	DC-DC-IC	PFM step-up, 100kHz, 1.8V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF191	-	XC9111F191ER	DC-DC-IC	PFM step-up, 100kHz, 1.9V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF2	-	XC6222A32BER-G	LVR-IC	LDO, 3.25V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NF201	-	XC9111F201ER	DC-DC-IC	PFM step-up, 100kHz, 2.0V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF211	-	XC9111F211ER	DC-DC-IC	PFM step-up, 100kHz, 2.1V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NF221	-	XC9111F221ER	DC-DC-IC	PFM step-up, 100kHz, 2.2V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF231	-	XC9111F231ER	DC-DC-IC	PFM step-up, 100kHz, 2.3V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF241	-	XC9111F241ER	DC-DC-IC	PFM step-up, 100kHz, 2.4V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF251	-	XC9111F251ER	DC-DC-IC	PFM step-up, 100kHz, 2.5V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF261	-	XC9111F261ER	DC-DC-IC	PFM step-up, 100kHz, 2.6V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF271	-	XC9111F271ER	DC-DC-IC	PFM step-up, 100kHz, 2.7V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF281	-	XC9111F281ER	DC-DC-IC	PFM step-up, 100kHz, 2.8V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF291	-	XC9111F291ER	DC-DC-IC	PFM step-up, 100kHz, 2.9V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF3	-	XC6222A33BER-G	LVR-IC	LDO, 3.35V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NF301	-	XC9111F301ER	DC-DC-IC	PFM step-up, 100kHz, 3.0V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF311	-	XC9111F311ER	DC-DC-IC	PFM step-up, 100kHz, 3.1V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF321	-	XC9111F321ER	DC-DC-IC	PFM step-up, 100kHz, 3.2V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF331	-	XC9111F331ER	DC-DC-IC	PFM step-up, 100kHz, 3.3V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF341	-	XC9111F341ER	DC-DC-IC	PFM step-up, 100kHz, 3.4V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF351	-	XC9111F351ER	DC-DC-IC	PFM step-up, 100kHz, 3.5V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF361	-	XC9111F361ER	DC-DC-IC	PFM step-up, 100kHz, 3.6V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF371	-	XC9111F371ER	DC-DC-IC	PFM step-up, 100kHz, 3.7V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF381	-	XC9111F381ER	DC-DC-IC	PFM step-up, 100kHz, 3.8V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF391	-	XC9111F391ER	DC-DC-IC	PFM step-up, 100kHz, 3.9V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF4	-	XC6222A34BER-G	LVR-IC	LDO, 3.45V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NF401	-	XC9111F401ER	DC-DC-IC	PFM step-up, 100kHz, 4.0V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF411	-	XC9111F411ER	DC-DC-IC	PFM step-up, 100kHz, 4.1V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF421	-	XC9111F421ER	DC-DC-IC	PFM step-up, 100kHz, 4.2V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF431	-	XC9111F431ER	DC-DC-IC	PFM step-up, 100kHz, 4.3V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF441	-	XC9111F441ER	DC-DC-IC	PFM step-up, 100kHz, 4.4V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF451	-	XC9111F451ER	DC-DC-IC	PFM step-up, 100kHz, 4.5V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF461	-	XC9111F461ER	DC-DC-IC	PFM step-up, 100kHz, 4.6V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF471	-	XC9111F471ER	DC-DC-IC	PFM step-up, 100kHz, 4.7V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF481	-	XC9111F481ER	DC-DC-IC	PFM step-up, 100kHz, 4.8V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF491	-	XC9111F491ER	DC-DC-IC	PFM step-up, 100kHz, 4.9V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF5	-	XC6222A35BER-G	LVR-IC	LDO, 3.55V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NF501	-	XC9111F501ER	DC-DC-IC	PFM step-up, 100kHz, 5.0V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF511	-	XC9111F511ER	DC-DC-IC	PFM step-up, 100kHz, 5.1V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF521	-	XC9111F521ER	DC-DC-IC	PFM step-up, 100kHz, 5.2V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF531	-	XC9111F531ER	DC-DC-IC	PFM step-up, 100kHz, 5.3V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF541	-	XC9111F541ER	DC-DC-IC	PFM step-up, 100kHz, 5.4V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF551	-	XC9111F551ER	DC-DC-IC	PFM step-up, 100kHz, 5.5V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF561	-	XC9111F561ER	DC-DC-IC	PFM step-up, 100kHz, 5.6V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF571	-	XC9111F571ER	DC-DC-IC	PFM step-up, 100kHz, 5.7V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF581	-	XC9111F581ER	DC-DC-IC	PFM step-up, 100kHz, 5.8V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF591	-	XC9111F591ER	DC-DC-IC	PFM step-up, 100kHz, 5.9V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF6	-	XC6222A36BER-G	LVR-IC	LDO, 3.65V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NF601	-	XC9111F601ER	DC-DC-IC	PFM step-up, 100kHz, 6.0V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF611	-	XC9111F611ER	DC-DC-IC	PFM step-up, 100kHz, 6.1V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF621	-	XC9111F621ER	DC-DC-IC	PFM step-up, 100kHz, 6.2V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF631	-	XC9111F631ER	DC-DC-IC	PFM step-up, 100kHz, 6.3V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF641	-	XC9111F641ER	DC-DC-IC	PFM step-up, 100kHz, 6.4V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF651	-	XC9111F651ER	DC-DC-IC	PFM step-up, 100kHz, 6.5V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF661	-	XC9111F661ER	DC-DC-IC	PFM step-up, 100kHz, 6.6V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF671	-	XC9111F671ER	DC-DC-IC	PFM step-up, 100kHz, 6.7V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF681	-	XC9111F681ER	DC-DC-IC	PFM step-up, 100kHz, 6.8V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF691	-	XC9111F691ER	DC-DC-IC	PFM step-up, 100kHz, 6.9V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF7	-	XC6222A37BER-G	LVR-IC	LDO, 3.75V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NF701	-	XC9111F701ER	DC-DC-IC	PFM step-up, 100kHz, 7.0V±2.5%, 400mA	USP-6C	49go	DC13	9b	Tor
NF8	-	XC6222A38BER-G	LVR-IC	LDO, 3.85V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NF9	-	XC6222A39BER-G	LVR-IC	LDO, 3.95V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NFA	-	XC6222A40BER-G	LVR-IC	LDO, 4.05V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NFB	-	XC6222A41BER-G	LVR-IC	LDO, 4.15V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NFC	-	XC6222A42BER-G	LVR-IC	LDO, 4.25V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NFD	-	XC6222A43BER-G	LVR-IC	LDO, 4.35V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NFE	-	XC6222A44BER-G	LVR-IC	LDO, 4.45V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NFF	-	XC6222A45BER-G	LVR-IC	LDO, 4.55V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NFH	-	XC6222A46BER-G	LVR-IC	LDO, 4.65V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NFK	-	XC6222A47BER-G	LVR-IC	LDO, 4.75V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NFL	-	XC6222A48BER-G	LVR-IC	LDO, 4.85V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NFM	-	XC6222A49BER-G	LVR-IC	LDO, 4.95V±1%, 700mA, +CE	USP-6C	49hg	VR4	9a	Tor
NG	-	CH3904N1PT	Si-npn	AF, Sw, 40V, 200mA, B=100..300, 300MHz	FBPT-923	17ta	-	9a	Chm
NG	-	MIC5380-2.85/1.8YFT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.8V±2%, 150mA, +CE	MLF-6A	81g5	VR19	9x	Mcr
NG	-	R1118K351B	LVR-IC	3.5V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
NG	-	RP106K131B	LVR-IC	LDO, 1.3V±0.8%, 400mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NH	-	EUP7201-1.8/3.3U	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.3V±2%, 150mA, +CE	USP-6	49xv	VR19	9m	Eut
NH	-	LD6805K/25H	LVR-IC	LDO, 2.5V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
NH	-	R1118K361B	LVR-IC	3.6V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
NH	-	RP106K141B	LVR-IC	LDO, 1.4V±0.8%, 400mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
NH8	-	XC6222B081ER-G	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NH9	-	XC6222B091ER-G	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHA	-	XC6222B101ER-G	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHB	-	XC6222B111ER-G	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHC	-	XC6222B121ER-G	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHD	-	XC6222B131ER-G	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHE	-	XC6222B141ER-G	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHF	-	XC6222B151ER-G	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHH	-	XC6222B161ER-G	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHK	-	XC6222B171ER-G	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHL	-	XC6222B181ER-G	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHM	-	XC6222B191ER-G	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHN	-	XC6222B201ER-G	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHP	-	XC6222B211ER-G	LVR-IC	LDO, 2.1V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHR	-	XC6222B221ER-G	LVR-IC	LDO, 2.2V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHS	-	XC6222B231ER-G	LVR-IC	LDO, 2.3V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHT	-	XC6222B241ER-G	LVR-IC	LDO, 2.4V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHU	-	XC6222B251ER-G	LVR-IC	LDO, 2.5V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHV	-	XC6222B261ER-G	LVR-IC	LDO, 2.6V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHX	-	XC6222B271ER-G	LVR-IC	LDO, 2.7V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHY	-	XC6222B281ER-G	LVR-IC	LDO, 2.8V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NHZ	-	XC6222B291ER-G	LVR-IC	LDO, 2.9V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
nI	-	BU11UA3WNVX	LVR-IC	LDO, 1.1V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
NJ	-	EUP7201-3.3/3.3U	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±2%, 150mA, +CE	USP-6	49xv	VR19	9m	Eut
NJ	-	R1118K371B	LVR-IC	3.7V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
NJ	-	RP106K151B	LVR-IC	LDO, 1.5V±0.8%, 400mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
NK	-	EUP7201-2.8/3.0U	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±2%, 150mA, +CE	USP-6	49xv	VR19	9m	Eut
NK	-	R1118K381B	LVR-IC	3.8V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
NK	-	RP106K161B	LVR-IC	LDO, 1.6V±0.8%, 400mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
NK8	-	XC6222B08BER-G	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NK9	-	XC6222B09BER-G	LVR-IC	LDO, 0.95V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKA	-	XC6222B10BER-G	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKB	-	XC6222B11BER-G	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKC	-	XC6222B12BER-G	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKD	-	XC6222B13BER-G	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKE	-	XC6222B14BER-G	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKF	-	XC6222B15BER-G	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKH	-	XC6222B16BER-G	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKK	-	XC6222B17BER-G	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKL	-	XC6222B18BER-G	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKM	-	XC6222B19BER-G	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKN	-	XC6222B20BER-G	LVR-IC	LDO, 2.05V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKP	-	XC6222B21BER-G	LVR-IC	LDO, 2.15V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKR	-	XC6222B22BER-G	LVR-IC	LDO, 2.25V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKS	-	XC6222B23BER-G	LVR-IC	LDO, 2.35V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKT	-	XC6222B24BER-G	LVR-IC	LDO, 2.45V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKU	-	XC6222B25BER-G	LVR-IC	LDO, 2.55V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKV	-	XC6222B26BER-G	LVR-IC	LDO, 2.65V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKX	-	XC6222B27BER-G	LVR-IC	LDO, 2.75V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKY	-	XC6222B28BER-G	LVR-IC	LDO, 2.85V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKZ	-	XC6222B29BER-G	LVR-IC	LDO, 2.95V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NKZ	mb	MIC5310-2.85/2.6YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.6V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
NL	-	EUP7201-2.8/3.3U	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±2%, 150mA, +CE	USP-6	49xv	VR19	9m	Eut
NL	-	R1118K391B	LVR-IC	3.9V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
NL	-	RP106K171B	LVR-IC	LDO, 1.7V±0.8%, 400mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
NL0	-	XC6222B301ER-G	LVR-IC	LDO, 3.0V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NL1	-	XC6222B311ER-G	LVR-IC	LDO, 3.1V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NL2	-	XC6222B321ER-G	LVR-IC	LDO, 3.2V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NL3	-	XC6222B331ER-G	LVR-IC	LDO, 3.3V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NL4	-	XC6222B341ER-G	LVR-IC	LDO, 3.4V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NL5	-	XC6222B351ER-G	LVR-IC	LDO, 3.5V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NL6	-	XC6222B361ER-G	LVR-IC	LDO, 3.6V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NL7	-	XC6222B371ER-G	LVR-IC	LDO, 3.7V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NL8	-	XC6222B381ER-G	LVR-IC	LDO, 3.8V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NL9	-	XC6222B391ER-G	LVR-IC	LDO, 3.9V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NLA	-	XC6222B401ER-G	LVR-IC	LDO, 4.0V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NLB	-	XC6222B411ER-G	LVR-IC	LDO, 4.1V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NLC	-	XC6222B421ER-G	LVR-IC	LDO, 4.2V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NLD	-	XC6222B431ER-G	LVR-IC	LDO, 4.3V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NLE	-	XC6222B441ER-G	LVR-IC	LDO, 4.4V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NLF	-	XC6222B451ER-G	LVR-IC	LDO, 4.5V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NLH	-	XC6222B461ER-G	LVR-IC	LDO, 4.6V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NLK	-	XC6222B471ER-G	LVR-IC	LDO, 4.7V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NLL	-	XC6222B481ER-G	LVR-IC	LDO, 4.8V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NLM	-	XC6222B491ER-G	LVR-IC	LDO, 4.9V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NLN	-	XC6222B501ER-G	LVR-IC	LDO, 5.0V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NM	-	EUP7201-2.8/2.8U	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±2%, 150mA, +CE	USP-6	49xv	VR19	9m	Eut
NM	-	R1118K401B	LVR-IC	4V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
NM	-	RP106K181B	LVR-IC	LDO, 1.8V±0.8%, 400mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
NM0	-	XC6222B30BER-G	LVR-IC	LDO, 3.05V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NM1	-	XC6222B31BER-G	LVR-IC	LDO, 3.15V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NM2	-	XC6222B32BER-G	LVR-IC	LDO, 3.25V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NM3	-	XC6222B33BER-G	LVR-IC	LDO, 3.35V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NM4	-	XC6222B34BER-G	LVR-IC	LDO, 3.45V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NM5	-	XC6222B35BER-G	LVR-IC	LDO, 3.55V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NM6	-	XC6222B36BER-G	LVR-IC	LDO, 3.65V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NM7	-	XC6222B37BER-G	LVR-IC	LDO, 3.75V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NM8	-	XC6222B38BER-G	LVR-IC	LDO, 3.85V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NM9	-	XC6222B39BER-G	LVR-IC	LDO, 3.95V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NMA	-	XC6222B40BER-G	LVR-IC	LDO, 4.05V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NMB	-	XC6222B41BER-G	LVR-IC	LDO, 4.15V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NMC	-	XC6222B42BER-G	LVR-IC	LDO, 4.25V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NMD	-	XC6222B43BER-G	LVR-IC	LDO, 4.35V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NME	-	XC6222B44BER-G	LVR-IC	LDO, 4.45V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NMF	-	XC6222B45BER-G	LVR-IC	LDO, 4.55V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NMH	-	XC6222B46BER-G	LVR-IC	LDO, 4.65V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NMK	-	XC6222B47BER-G	LVR-IC	LDO, 4.75V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NML	-	XC6222B48BER-G	LVR-IC	LDO, 4.85V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NMM	-	XC6222B49BER-G	LVR-IC	LDO, 4.95V±1%, 700mA, +CE, CL	USP-6C	49hg	VR4	9a	Tor
NN	-	BAR65-02L	PIN-diode	TV-Tuner, 30V, 100mA, Vf<1V(50mA), <0.9pF	TSLP-2-1	13d	-	2b	Inf
NN	-	EUP7201-3.0/3.0U	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±2%, 150mA, +CE	USP-6	49xv	VR19	9m	Eut
NN	-	MIC2211-2.85/2.85BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(150mA)/2.85V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
NN	-	R1118K411B	LVR-IC	4.1V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
NN	-	RP106K101B5	LVR-IC	LDO, 1.05V±0.8%, 400mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
NN8	-	XC6222C081ER-G	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NN9	-	XC6222C091ER-G	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNA	-	XC6222C101ER-G	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNB	-	XC6222C111ER-G	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNC	-	XC6222C121ER-G	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NND	-	XC6222C131ER-G	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNE	-	XC6222C141ER-G	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNF	-	XC6222C151ER-G	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNH	-	XC6222C161ER-G	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNK	-	XC6222C171ER-G	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNL	-	XC6222C181ER-G	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNM	-	XC6222C191ER-G	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNN	-	XC6222C201ER-G	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNP	-	XC6222C211ER-G	LVR-IC	LDO, 2.1V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNR	-	XC6222C221ER-G	LVR-IC	LDO, 2.2V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNS	-	XC6222C231ER-G	LVR-IC	LDO, 2.3V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNT	-	XC6222C241ER-G	LVR-IC	LDO, 2.4V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNU	-	XC6222C251ER-G	LVR-IC	LDO, 2.5V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNV	-	XC6222C261ER-G	LVR-IC	LDO, 2.6V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNX	-	XC6222C271ER-G	LVR-IC	LDO, 2.7V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNY	-	XC6222C281ER-G	LVR-IC	LDO, 2.8V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNZ	-	XC6222C291ER-G	LVR-IC	LDO, 2.9V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NNZ	mb	MIC5310-2.85/2.85YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.85V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
NP	-	BAT15-02L	Si-diode	Schottky, DBS-mix, 4V, 100mA, <12GHz, <0.35pF	TSLP-2-1	13d	-	2b	Inf
NP	-	EUP7201-2.8/1.2U	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±2%, 150mA, +CE	USP-6	49xv	VR19	9m	Eut
NP	-	LD6805K/25P	LVR-IC	LDO, 2.5V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
NP	-	R1118K421B	LVR-IC	4.2V±1%, 150mA, +CE	DFN1612-4B	45vm	VR4	9a	Ric
NP	-	RP106K121B5	LVR-IC	LDO, 1.25V±0.8%, 400mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
NP8	-	XC6222C08BER-G	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NP9	-	XC6222C09BER-G	LVR-IC	LDO, 0.95V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPA	-	XC6222C10BER-G	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPB	-	XC6222C11BER-G	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NPC	-	XC6222C12BER-G	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPD	-	MIC5335-2.85/1.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.85V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
NPD	-	XC6222C13BER-G	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPE	-	XC6222C14BER-G	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPF	-	XC6222C15BER-G	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPH	-	XC6222C16BER-G	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPK	-	MIC5335-2.85/2.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.6V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
NPK	-	XC6222C17BER-G	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPL	-	XC6222C18BER-G	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPM	-	XC6222C19BER-G	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPN	-	MIC5335-2.85/2.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.85V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
NPN	-	XC6222C20BER-G	LVR-IC	LDO, 2.05V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPP	-	XC6222C21BER-G	LVR-IC	LDO, 2.15V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPR	-	XC6222C22BER-G	LVR-IC	LDO, 2.25V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPS	-	XC6222C23BER-G	LVR-IC	LDO, 2.35V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPT	-	XC6222C24BER-G	LVR-IC	LDO, 2.45V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPU	-	XC6222C25BER-G	LVR-IC	LDO, 2.55V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPV	-	XC6222C26BER-G	LVR-IC	LDO, 2.65V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPX	-	XC6222C27BER-G	LVR-IC	LDO, 2.75V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPY	-	XC6222C28BER-G	LVR-IC	LDO, 2.85V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NPZ	-	XC6222C29BER-G	LVR-IC	LDO, 2.95V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NQ	-	RP106K181B5	LVR-IC	LDO, 1.85V±0.8%, 400mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
NR	-	RP106K111B5	LVR-IC	LDO, 1.15V±0.8%, 400mA, +CE	DFN1212-6	52vr2	VR4	9a	Ric
NR0	-	XC6222C301ER-G	LVR-IC	LDO, 3.0V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NR1	-	XC6222C311ER-G	LVR-IC	LDO, 3.1V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NR2	-	XC6222C321ER-G	LVR-IC	LDO, 3.2V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NR3	-	XC6222C331ER-G	LVR-IC	LDO, 3.3V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NR4	-	XC6222C341ER-G	LVR-IC	LDO, 3.4V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NR5	-	XC6222C351ER-G	LVR-IC	LDO, 3.5V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NR6	-	XC6222C361ER-G	LVR-IC	LDO, 3.6V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NR7	-	XC6222C371ER-G	LVR-IC	LDO, 3.7V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NR8	-	XC6222C381ER-G	LVR-IC	LDO, 3.8V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NR9	-	XC6222C391ER-G	LVR-IC	LDO, 3.9V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NRA	-	XC6222C401ER-G	LVR-IC	LDO, 4.0V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NRB	-	XC6222C411ER-G	LVR-IC	LDO, 4.1V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NRC	-	XC6222C421ER-G	LVR-IC	LDO, 4.2V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NRD	-	XC6222C431ER-G	LVR-IC	LDO, 4.3V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NRE	-	XC6222C441ER-G	LVR-IC	LDO, 4.4V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NRF	-	XC6222C451ER-G	LVR-IC	LDO, 4.5V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NRH	-	XC6222C461ER-G	LVR-IC	LDO, 4.6V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NRK	-	XC6222C471ER-G	LVR-IC	LDO, 4.7V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NRL	-	XC6222C481ER-G	LVR-IC	LDO, 4.8V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NRM	-	XC6222C491ER-G	LVR-IC	LDO, 4.9V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NRN	-	XC6222C501ER-G	LVR-IC	LDO, 5.0V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NS	-	MIC2211-2.85/3.3BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V(150mA)/3.3V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
NS0	-	XC6222C30BER-G	LVR-IC	LDO, 3.05V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NS1	-	XC6222C31BER-G	LVR-IC	LDO, 3.15V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NS2	-	XC6222C32BER-G	LVR-IC	LDO, 3.25V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NS3	-	XC6222C33BER-G	LVR-IC	LDO, 3.35V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NS4	-	XC6222C34BER-G	LVR-IC	LDO, 3.45V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NS5	-	XC6222C35BER-G	LVR-IC	LDO, 3.55V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NS6	-	XC6222C36BER-G	LVR-IC	LDO, 3.65V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NS7	-	XC6222C37BER-G	LVR-IC	LDO, 3.75V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NS8	-	XC6222C38BER-G	LVR-IC	LDO, 3.85V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NS9	-	XC6222C39BER-G	LVR-IC	LDO, 3.95V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NSA	-	XC6222C40BER-G	LVR-IC	LDO, 4.05V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NSB	-	XC6222C41BER-G	LVR-IC	LDO, 4.15V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NSC	-	XC6222C42BER-G	LVR-IC	LDO, 4.25V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NSD	-	XC6222C43BER-G	LVR-IC	LDO, 4.35V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NSE	-	XC6222C44BER-G	LVR-IC	LDO, 4.45V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NSF	-	XC6222C45BER-G	LVR-IC	LDO, 4.55V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NSH	-	XC6222C46BER-G	LVR-IC	LDO, 4.65V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NSK	-	XC6222C47BER-G	LVR-IC	LDO, 4.75V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NSL	-	XC6222C48BER-G	LVR-IC	LDO, 4.85V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NSM	-	XC6222C49BER-G	LVR-IC	LDO, 4.95V±1%, 700mA, +CE, PDR	USP-6C	49hg	VR4	9a	Tor
NSU	-	TPA2028D1YZF	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/4Ω), shutdown, I2C	BGA-9	39	-	9a	Ti
NSV	-	TPA2026D2YZH	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3.2W(5V/4Ω), shutdown, I2C	BGA-16	39	-	9a	Ti
NT	-	CHT2222T1PT	Si-npn	AF, Sw, 40V, 600mA, B=100..300, 300MHz	FBPT-523	17ta	-	9a	Chm
NT	-	EUP7201-3.0/3.3U	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.3V±2%, 150mA, +CE	USP-6	49xv	VR19	9m	Eut
NT8	-	XC6222D081ER-G	LVR-IC	LDO, 0.8V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor




SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NT9	-	XC6222D091ER-G	LVR-IC	LDO, 0.9V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTA	-	XC6222D101ER-G	LVR-IC	LDO, 1.0V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTB	-	XC6222D111ER-G	LVR-IC	LDO, 1.1V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTC	-	XC6222D121ER-G	LVR-IC	LDO, 1.2V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTD	-	XC6222D131ER-G	LVR-IC	LDO, 1.3V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTE	-	XC6222D141ER-G	LVR-IC	LDO, 1.4V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTF	-	XC6222D151ER-G	LVR-IC	LDO, 1.5V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTH	-	XC6222D161ER-G	LVR-IC	LDO, 1.6V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTK	-	XC6222D171ER-G	LVR-IC	LDO, 1.7V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTL	-	XC6222D181ER-G	LVR-IC	LDO, 1.8V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTM	-	XC6222D191ER-G	LVR-IC	LDO, 1.9V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTN	-	XC6222D201ER-G	LVR-IC	LDO, 2.0V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTP	-	XC6222D211ER-G	LVR-IC	LDO, 2.1V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTR	-	XC6222D221ER-G	LVR-IC	LDO, 2.2V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTS	-	XC6222D231ER-G	LVR-IC	LDO, 2.3V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTT	-	XC6222D241ER-G	LVR-IC	LDO, 2.4V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTU	-	XC6222D251ER-G	LVR-IC	LDO, 2.5V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTV	-	XC6222D261ER-G	LVR-IC	LDO, 2.6V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTX	-	XC6222D271ER-G	LVR-IC	LDO, 2.7V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTY	-	XC6222D281ER-G	LVR-IC	LDO, 2.8V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NTZ	-	XC6222D291ER-G	LVR-IC	LDO, 2.9V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NU	-	EUP7201-1.8/2.6U	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±2%, 150mA, +CE	USP-6	49xv	VR19	9m	Eut
NU8	-	XC6222D08BER-G	LVR-IC	LDO, 0.85V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NU9	-	XC6222D09BER-G	LVR-IC	LDO, 0.95V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUA	-	XC6222D10BER-G	LVR-IC	LDO, 1.05V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUB	-	XC6222D11BER-G	LVR-IC	LDO, 1.15V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUC	-	XC6222D12BER-G	LVR-IC	LDO, 1.25V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUD	-	XC6222D13BER-G	LVR-IC	LDO, 1.35V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUE	-	XC6222D14BER-G	LVR-IC	LDO, 1.45V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUF	-	XC6222D15BER-G	LVR-IC	LDO, 1.55V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUH	-	XC6222D16BER-G	LVR-IC	LDO, 1.65V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUK	-	XC6222D17BER-G	LVR-IC	LDO, 1.75V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUL	-	XC6222D18BER-G	LVR-IC	LDO, 1.85V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUM	-	XC6222D19BER-G	LVR-IC	LDO, 1.95V±20mV, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUN	-	XC6222D20BER-G	LVR-IC	LDO, 2.05V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUP	-	XC6222D21BER-G	LVR-IC	LDO, 2.15V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUR	-	XC6222D22BER-G	LVR-IC	LDO, 2.25V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUS	-	XC6222D23BER-G	LVR-IC	LDO, 2.35V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUT	-	XC6222D24BER-G	LVR-IC	LDO, 2.45V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUU	-	XC6222D25BER-G	LVR-IC	LDO, 2.55V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUV	-	XC6222D26BER-G	LVR-IC	LDO, 2.65V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUX	-	XC6222D27BER-G	LVR-IC	LDO, 2.75V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUY	-	XC6222D28BER-G	LVR-IC	LDO, 2.85V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NUZ	-	XC6222D29BER-G	LVR-IC	LDO, 2.95V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NV0	-	XC6222D301ER-G	LVR-IC	LDO, 3.0V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NV1	-	XC6222D311ER-G	LVR-IC	LDO, 3.1V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NV2	-	XC6222D321ER-G	LVR-IC	LDO, 3.2V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NV3	-	XC6222D331ER-G	LVR-IC	LDO, 3.3V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NV4	-	XC6222D341ER-G	LVR-IC	LDO, 3.4V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NV5	-	XC6222D351ER-G	LVR-IC	LDO, 3.5V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NV6	-	XC6222D361ER-G	LVR-IC	LDO, 3.6V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NV7	-	XC6222D371ER-G	LVR-IC	LDO, 3.7V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NV8	-	XC6222D381ER-G	LVR-IC	LDO, 3.8V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NV9	-	XC6222D391ER-G	LVR-IC	LDO, 3.9V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NVA	-	XC6222D401ER-G	LVR-IC	LDO, 4.0V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NVB	-	XC6222D411ER-G	LVR-IC	LDO, 4.1V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NVC	-	XC6222D421ER-G	LVR-IC	LDO, 4.2V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NVD	-	XC6222D431ER-G	LVR-IC	LDO, 4.3V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NVE	-	XC6222D441ER-G	LVR-IC	LDO, 4.4V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NVF	-	XC6222D451ER-G	LVR-IC	LDO, 4.5V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NVH	-	XC6222D461ER-G	LVR-IC	LDO, 4.6V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NVK	-	XC6222D471ER-G	LVR-IC	LDO, 4.7V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NVL	-	XC6222D481ER-G	LVR-IC	LDO, 4.8V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NVM	-	XC6222D491ER-G	LVR-IC	LDO, 4.9V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NVN	-	XC6222D501ER-G	LVR-IC	LDO, 5.0V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NX0	-	XC6222D30BER-G	LVR-IC	LDO, 3.05V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NX1	-	XC6222D31BER-G	LVR-IC	LDO, 3.15V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NX2	-	XC6222D32BER-G	LVR-IC	LDO, 3.25V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NX3	-	XC6222D33BER-G	LVR-IC	LDO, 3.35V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NX4	-	XC6222D34BER-G	LVR-IC	LDO, 3.45V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
NX5	-	XC6222D35BER-G	LVR-IC	LDO, 3.55V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NX6	-	XC6222D36BER-G	LVR-IC	LDO, 3.65V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NX7	-	XC6222D37BER-G	LVR-IC	LDO, 3.75V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NX8	-	XC6222D38BER-G	LVR-IC	LDO, 3.85V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NX9	-	XC6222D39BER-G	LVR-IC	LDO, 3.95V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NXA	-	XC6222D40BER-G	LVR-IC	LDO, 4.05V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NXB	-	XC6222D41BER-G	LVR-IC	LDO, 4.15V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NXC	-	XC6222D42BER-G	LVR-IC	LDO, 4.25V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NXD	-	XC6222D43BER-G	LVR-IC	LDO, 4.35V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NXE	-	XC6222D44BER-G	LVR-IC	LDO, 4.45V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NXF	-	XC6222D45BER-G	LVR-IC	LDO, 4.55V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NXH	-	XC6222D46BER-G	LVR-IC	LDO, 4.65V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NXK	-	XC6222D47BER-G	LVR-IC	LDO, 4.75V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NXL	-	XC6222D48BER-G	LVR-IC	LDO, 4.85V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
NXM	-	XC6222D49BER-G	LVR-IC	LDO, 4.95V±1%, 700mA, +CE, CL, PDR	USP-6C	49hg	VR4	9a	Tor
OBC	-	TPA2018D1YZF	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/4Ω), shutdown, I2C	BGA-9	39	-	9a	Ti
OCA	-	TPA2037D1YFF	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3.25W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Ti
OD	-	MAX8840ELT15+T	LVR-IC	LDO, 1.5V±2%, 150mA, +CE	DFN-6	52	VR7a	9t	Max
OEN	-	TPA2015D1YZH	Lin-IC	AF PA, BTL, class-D, 3..5.5V, 2W(5V/8Ω), shutdown	BGA-16	39	-	9a	Ti
OEW	-	TPA2011D1YFF	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3.2W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Ti
OF	-	MIC2211-2.9/1.5BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(150mA)/1.5V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
OFZ	mb	MIC5310-2.9/1.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/1.5V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
OG	-	MAX8840ELT21+T	LVR-IC	LDO, 2.1V±2%, 150mA, +CE	DFN-6	52	VR7a	9t	Max
OGZ	mb	MIC5310-2.9/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/1.8V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
oi	-	BU2KUA3WNVX	LVR-IC	LDO, 2.95V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
OO	-	MIC2211-2.9/2.9BML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V(150mA)/2.9V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
OOZ	mb	MIC5310-2.9/2.9YML	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/2.9V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
OPF	-	MIC5335-2.9/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/1.5V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
OPG	-	MIC5335-2.9/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/1.8V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
OPO	-	MIC5335-2.9/2.9YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.9V/2.9V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
OR	-	MAX8840ELT45+T	LVR-IC	LDO, 4.5V±2%, 150mA, +CE	DFN-6	52	VR7a	9t	Max
OY	-	MAX8840ELT40+T	LVR-IC	LDO, 4.0V±2%, 150mA, +CE	DFN-6	52	VR7a	9t	Max
P	-	UNRL110	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1=47k	ML4	31tm	-	2b	Pan
P	-	UNRL210	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1=47k	ML4	31tm	-	2b	Pan
P*	-	SH4890IBL	Lin-IC	AF PA, BTL, 2.2..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Sit
P0	-	ISL9016IRUFFZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/2.5V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
P0	-	R3117K373A	Vdet-IC	3.7V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
P0	-	RP114K181B5	LVR-IC	LDO, 1.85V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
P0	-	XC6221B4117R	LVR-IC	LDO, 4.1V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
P0	-	XC6GN4002HR	Vdet-IC	4.0V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
p00	-	74AUP2G00GM	CMOS-Log	Dual 2-input NAND gates	SOT902-1	51	Log50	9z	Nxp
p00	-	74AUP2G00GT	CMOS-Log	Dual 2-input NAND gates	SOT833-1	53	Log50	9z	Nxp
p02	-	74AUP2G02GM	CMOS-Log	Dual 2-input NOR gates	SOT902-1	51	Log53	9z	Nxp
p02	-	74AUP2G02GT	CMOS-Log	Dual 2-input NOR gates	SOT833-1	53	Log53	9z	Nxp
P03	-	XC61GN4002HR	Vdet-IC	4.0V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
p08	-	74AUP2G08GM	CMOS-Log	Dual 2-input AND gates	SOT902-1	51	Log51	9z	Nxp
p08	-	74AUP2G08GT	CMOS-Log	Dual 2-input AND gates	SOT833-1	53	Log51	9z	Nxp
P0A	-	XC6108N40AGR	Vdet-IC	4.0V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P0A	-	XC6118C30AGR-G	Vdet-IC	3.0V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
P0B	-	XC6108N40BGR	Vdet-IC	4.0V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P0B	-	XC6118C30BGR-G	Vdet-IC	3.0V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
P0C	-	XC6108N40CGR	Vdet-IC	4.0V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P0C	-	XC6118C30CGR-G	Vdet-IC	3.0V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
P0D	-	XC6108N40DGR	Vdet-IC	4.0V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P0D	-	XC6118C30DGR-G	Vdet-IC	3.0V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
P1	-	DW84C11NND03	Z-diode	11V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
P1	-	ISL9016IRUGWZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/1.2V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
P1	-	R3117K383A	Vdet-IC	3.8V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
P1	-	RP114K281B5	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
P1	-	XC6221B4217R	LVR-IC	LDO, 4.2V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
P1	-	XC6GN4102HR	Vdet-IC	4.1V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
P13	-	XC61GN4102HR	Vdet-IC	4.1V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
P15E	-	R1163K151E	LVR-IC	LDO, 1.5V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P16E	-	R1163K161E	LVR-IC	LDO, 1.6V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P17E	-	R1163K171E	LVR-IC	LDO, 1.7V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P185	-	R1163K181E5	LVR-IC	LDO, 1.85V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P18E	-	R1163K181E	LVR-IC	LDO, 1.8V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P19E	-	R1163K191E	LVR-IC	LDO, 1.9V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P1A	-	XC6108N41AGR	Vdet-IC	4.1V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P1A	-	XC6118C31AGR-G	Vdet-IC	3.1V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P1B	-	XC6108N41BGR	Vdet-IC	4.1V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P1B	-	XC6118C31BGR-G	Vdet-IC	3.1V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
P1C	-	XC6108N41CGR	Vdet-IC	4.1V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P1C	-	XC6118C31CGR-G	Vdet-IC	3.1V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
P1D	-	XC6108N41DGR	Vdet-IC	4.1V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P1D	-	XC6118C31DGR-G	Vdet-IC	3.1V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
p2	-	74AUP1G240GF	CMOS-Log	Bus buffer inverted with 3–state output	SOT891	52	Log22	9z	Nxp
p2	-	74AUP1G240GM	CMOS-Log	Bus buffer inverted with 3–state output	SOT886	57	Log22	9z	Nxp
P2	-	DW84C12NND03	Z-diode	12V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
P2	-	ISL9016IRUJWZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.2V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
P2	-	R3117K393A	Vdet-IC	3.9V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
P2	-	RP114K341B5	LVR-IC	LDO, 3.45V±1%, 300mA, +CE	DFN1010-4	48vm	VR4	9a	Ric
P2	-	XC6221B4317R	LVR-IC	LDO, 4.3V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
P2	-	XC6GN4202HR	Vdet-IC	4.2V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
P20E	-	R1163K201E	LVR-IC	LDO, 2.0V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P21E	-	R1163K211E	LVR-IC	LDO, 2.1V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P22E	-	R1163K221E	LVR-IC	LDO, 2.2V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P23	-	XC61GN4202HR	Vdet-IC	4.2V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
P23E	-	R1163K231E	LVR-IC	LDO, 2.3V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P24E	-	R1163K241E	LVR-IC	LDO, 2.4V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
p25	-	74AUP2G125GM	CMOS-Log	Dual bus buffer with 3-state output	SOT902-1	51	Log54	9z	Nxp
p25	-	74AUP2G125GT	CMOS-Log	Dual bus buffer with 3-state output	SOT833-1	53	Log54	9z	Nxp
P25E	-	R1163K251E	LVR-IC	LDO, 2.5V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
p26	-	74AUP2G126GM	CMOS-Log	Dual bus buffer with 3-state output	SOT902-1	51	Log55	9z	Nxp
p26	-	74AUP2G126GT	CMOS-Log	Dual bus buffer with 3-state output	SOT833-1	53	Log55	9z	Nxp
P26E	-	R1163K261E	LVR-IC	LDO, 2.6V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P27E	-	R1163K271E	LVR-IC	LDO, 2.7V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P285	-	R1163K281E5	LVR-IC	LDO, 2.85V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P28E	-	R1163K281E	LVR-IC	LDO, 2.8V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P29E	-	R1163K291E	LVR-IC	LDO, 2.9V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P2A	-	XC6108N42AGR	Vdet-IC	4.2V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P2A	-	XC6118C32AGR-G	Vdet-IC	3.2V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
P2B	-	XC6108N42BGR	Vdet-IC	4.2V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P2B	-	XC6118C32BGR-G	Vdet-IC	3.2V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
P2C	-	XC6108N42CGR	Vdet-IC	4.2V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P2C	-	XC6118C32CGR-G	Vdet-IC	3.2V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
P2D	-	XC6108N42DGR	Vdet-IC	4.2V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P2D	-	XC6118C32DGR-G	Vdet-IC	3.2V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
P3	-	DW84C13NND03	Z-diode	13V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
P3	-	ISL9016IRUJBZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
P3	-	R3117K403A	Vdet-IC	4.0V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
P3	-	XC6221B4417R	LVR-IC	LDO, 4.4V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
P3	-	XC6GN4302HR	Vdet-IC	4.3V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
P30E	-	R1163K301E	LVR-IC	LDO, 3.0V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P31E	-	R1163K311E	LVR-IC	LDO, 3.1V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
p32	-	74AUP2G32GM	CMOS-Log	Dual 2-input OR gates	SOT902-1	51	Log52	9z	Nxp
p32	-	74AUP2G32GT	CMOS-Log	Dual 2-input OR gates	SOT833-1	53	Log52	9z	Nxp
P32E	-	R1163K321E	LVR-IC	LDO, 3.2V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P33	-	XC61GN4302HR	Vdet-IC	4.3V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
P33E	-	R1163K331E	LVR-IC	LDO, 3.3V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P34E	-	R1163K341E	LVR-IC	LDO, 3.4V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P35E	-	R1163K351E	LVR-IC	LDO, 3.5V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P36E	-	R1163K361E	LVR-IC	LDO, 3.6V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P37E	-	R1163K371E	LVR-IC	LDO, 3.7V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P38E	-	R1163K381E	LVR-IC	LDO, 3.8V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P39E	-	R1163K391E	LVR-IC	LDO, 3.9V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
P3A	-	XC6108N43AGR	Vdet-IC	4.3V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P3A	-	XC6118C33AGR-G	Vdet-IC	3.3V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
P3B	-	XC6108N43BGR	Vdet-IC	4.3V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P3B	-	XC6118C33BGR-G	Vdet-IC	3.3V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
P3C	-	XC6108N43CGR	Vdet-IC	4.3V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P3C	-	XC6118C33CGR-G	Vdet-IC	3.3V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
P3D	-	XC6108N43DGR	Vdet-IC	4.3V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P3D	-	XC6118C33DGR-G	Vdet-IC	3.3V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
P3s	-	BAR63-07L4	PIN-diode	Dual, Sw, RF, 100V, 100mA, Vf<1.1V(50mA), < 0.3pF	TSLP-4-4	31ce	-	2b	Inf
p4	-	74AUP2G04GF	CMOS-Log	Dual inverters	SOT891	52	Log24	9z	Nxp
p4	-	74AUP2G04GM	CMOS-Log	Dual inverters	SOT886	57	Log24	9z	Nxp
P4	-	DW84C15NND03	Z-diode	15V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
P4	-	ISL9016IRUKFZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.5V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
P4	-	R3117K413A	Vdet-IC	4.1V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P4	-	XC6221B4517R	LVR-IC	LDO, 4.5V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
P4	-	XC6GN4402HR	Vdet-IC	4.4V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
p40	-	74AUP2G240GM	CMOS-Log	Dual bus buffer inverted with 3-state output	SOT902-1	51	Log67	9z	Nxp
p40	-	74AUP2G240GT	CMOS-Log	Dual bus buffer inverted with 3-state output	SOT833-1	53	Log67	9z	Nxp
P40E	-	R1163K401E	LVR-IC	LDO, 4.0V±2.5%, 150mA, +CE, AE(mode)	PLP1616-6	66vrj	VR10	9b	Ric
p41	-	74AUP2G241GM	CMOS-Log	Dual bus buffer non-inverted with 3-state output	SOT902-1	51	Log60	9z	Nxp
p41	-	74AUP2G241GT	CMOS-Log	Dual bus buffer non-inverted with 3-state output	SOT833-1	53	Log60	9z	Nxp
P43	-	XC61GN4402HR	Vdet-IC	4.4V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
P4A	-	XC6108N44AGR	Vdet-IC	4.4V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P4A	-	XC6118C34AGR-G	Vdet-IC	3.4V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
P4B	-	XC6108N44BGR	Vdet-IC	4.4V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P4B	-	XC6118C34BGR-G	Vdet-IC	3.4V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
P4C	-	XC6108N44CGR	Vdet-IC	4.4V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P4C	-	XC6118C34CGR-G	Vdet-IC	3.4V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
P4D	-	XC6108N44DGR	Vdet-IC	4.4V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P4D	-	XC6118C34DGR-G	Vdet-IC	3.4V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
p5	-	74AUP1T45GF	CMOS-Log	Dual supply translating transceiver with 3-state output	SOT891	52	Log70	9z	Nxp
p5	-	74AUP1T45GM	CMOS-Log	Dual supply translating transceiver with 3-state output	SOT886	57	Log70	9z	Nxp
P5	-	DW84C16NND03	Z-diode	16V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
P5	-	ISL9016IRUKWZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/1.2V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
P5	-	R3117K423A	Vdet-IC	4.2V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
P5	-	XC6221B4617R	LVR-IC	LDO, 4.6V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
P5	-	XC6GN4502HR	Vdet-IC	4.5V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
P53	-	XC61GN4502HR	Vdet-IC	4.5V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
P5A	-	XC6108N45AGR	Vdet-IC	4.5V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P5A	-	XC6118C35AGR-G	Vdet-IC	3.5V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
P5B	-	XC6108N45BGR	Vdet-IC	4.5V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P5B	-	XC6118C35BGR-G	Vdet-IC	3.5V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
P5C	-	XC6108N45CGR	Vdet-IC	4.5V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P5C	-	XC6118C35CGR-G	Vdet-IC	3.5V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
P5D	-	XC6108N45DGR	Vdet-IC	4.5V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P5D	-	XC6118C35DGR-G	Vdet-IC	3.5V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
P6	-	DW84C18NND03	Z-diode	18V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
P6	-	ISL9016IRUMWZ	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.2V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
P6	-	R3117K433A	Vdet-IC	4.3V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
P6	-	XC6221B4717R	LVR-IC	LDO, 4.7V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
P6	-	XC6GN4602HR	Vdet-IC	4.6V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
P63	-	XC61GN4602HR	Vdet-IC	4.6V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
P6A	-	XC6108N46AGR	Vdet-IC	4.6V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P6A	-	XC6118C36AGR-G	Vdet-IC	3.6V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
P6B	-	XC6108N46BGR	Vdet-IC	4.6V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P6B	-	XC6118C36BGR-G	Vdet-IC	3.6V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
P6C	-	XC6108N46CGR	Vdet-IC	4.6V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P6C	-	XC6118C36CGR-G	Vdet-IC	3.6V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
P6D	-	XC6108N46DGR	Vdet-IC	4.6V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P6D	-	XC6118C36DGR-G	Vdet-IC	3.6V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
p7	-	74AUP2G07GF	CMOS-Log	Dual noninverting buffers/drivers (ODO)	SOT891	52	Log26	9z	Nxp
p7	-	74AUP2G07GM	CMOS-Log	Dual noninverting buffers/drivers (ODO)	SOT886	57	Log26	9z	Nxp
P7	-	DW84C20NND03	Z-diode	20V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
P7	-	ISL9016IRUMBZ	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.5V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
P7	-	R3117K443A	Vdet-IC	4.4V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
P7	-	XC6221B4817R	LVR-IC	LDO, 4.8V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
P7	-	XC6GN4702HR	Vdet-IC	4.7V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
P73	-	XC61GN4702HR	Vdet-IC	4.7V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
p74	-	74AUP1G74GD	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	SOT996-2	54	Log59	9z	Nxp
p74	-	74AUP1G74GM	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	SOT902-1	51	Log59	9z	Nxp
p74	-	74AUP1G74GT	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	SOT833-1	53	Log59	9z	Nxp
p79	-	74AUP2G79GM	CMOS-Log	Dual positive-edge triggered D-type flip-flop	SOT902-1	51	Log63	9z	Nxp
p79	-	74AUP2G79GT	CMOS-Log	Dual positive-edge triggered D-type flip-flop	SOT833-1	53	Log63	9z	Nxp
P7A	-	XC6108N47AGR	Vdet-IC	4.7V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P7A	-	XC6118C37AGR-G	Vdet-IC	3.7V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
P7B	-	XC6108N47BGR	Vdet-IC	4.7V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P7B	-	XC6118C37BGR-G	Vdet-IC	3.7V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
P7C	-	XC6108N47CGR	Vdet-IC	4.7V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P7C	-	XC6118C37CGR-G	Vdet-IC	3.7V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
P7D	-	XC6108N47DGR	Vdet-IC	4.7V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P7D	-	XC6118C37DGR-G	Vdet-IC	3.7V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
P8	-	DW84C22NND03	Z-diode	22V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
P8	-	ISL9016IRUMCZ	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.8V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
P8	-	R3117K453A	Vdet-IC	4.5V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
P8	-	XC6GN4802HR	Vdet-IC	4.8V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
p80	-	74AUP2G80GM	CMOS-Log	Dual positive-edge triggered D-type flip-flop	SOT902-1	51	Log64	9z	Nxp
p80	-	74AUP2G80GT	CMOS-Log	Dual positive-edge triggered D-type flip-flop	SOT833-1	53	Log64	9z	Nxp
P83	-	XC61GN4802HR	Vdet-IC	4.8V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
P8302A	-	PAM8302AAYC	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.5W(5V/4Ω), shutdown	DFN-8	92	AFP24	9a	Pam
P8303A	-	PAM8303ABYC	Lin-IC	AF PA, BTL, class-D, 2.8..5.5V, 3W(5V/4Ω), shutdown	DFN-8	92	AFP63	9a	Pam
P8303C	-	PAM8303CBYC	Lin-IC	AF PA, BTL, class-D, 2.8..5.5V, 3W(5V/4Ω), shutdown	DFN-8	92	AFP63	9a	Pam
P8303D	-	PAM8303DBYC	Lin-IC	AF PA, BTL, class-D, 2.8..5.5V, 3W(5V/4Ω), shutdown	DFN-8	92	AFP63	9a	Pam
P8404	-	PAM8404KG	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2x3W(5V/4Ω), shutdown	QFN-20	38	-	9a	Pam
p86	-	74AUP2G86GM	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	SOT902-1	51	Log65	9z	Nxp
p86	-	74AUP2G86GT	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	SOT833-1	53	Log65	9z	Nxp
P8A	-	XC6108N48AGR	Vdet-IC	4.8V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P8A	-	XC6118C38AGR-G	Vdet-IC	3.8V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
P8B	-	XC6108N48BGR	Vdet-IC	4.8V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P8B	-	XC6118C38BGR-G	Vdet-IC	3.8V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
P8C	-	XC6108N48CGR	Vdet-IC	4.8V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P8C	-	XC6118C38CGR-G	Vdet-IC	3.8V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
P8D	-	XC6108N48DGR	Vdet-IC	4.8V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P8D	-	XC6118C38DGR-G	Vdet-IC	3.8V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
P8K	-	MIC5370-3.0/2.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.6V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
P8P	-	MIC5370-3.0/3.0YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
p9	-	74AUP1G09GF	CMOS-Log	2-input AND gate (ODO)	SOT891	52	Log9	9z	Nxp
p9	-	74AUP1G09GM	CMOS-Log	2-input AND gate (ODO)	SOT886	57	Log9	9z	Nxp
p9	-	74AUP1G09GN	CMOS-Log	2-input AND gate (ODO)	SOT1115	52	Log9	9z	Nxp
p9	-	74AUP1G09GS	CMOS-Log	2-input AND gate (ODO)	SOT1202	52	Log9	9z	Nxp
p9	-	74AUP1G09GX	CMOS-Log	2-input AND gate (ODO)	SOT-1226	A48	Log9	9z	Nxp
P9	-	DW84C24NND03	Z-diode	24V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
P9	-	ISL9016IRUMKZ	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.85V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
P9	-	R3117K463A	Vdet-IC	4.6V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
P9	-	XC6GN4902HR	Vdet-IC	4.9V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor
P93	-	XC61GN4902HR	Vdet-IC	4.9V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
P9A	-	XC6108N49AGR	Vdet-IC	4.9V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P9A	-	XC6118C39AGR-G	Vdet-IC	3.9V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
P9B	-	XC6108N49BGR	Vdet-IC	4.9V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
P9B	-	XC6118C39BGR-G	Vdet-IC	3.9V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
P9C	-	XC6108N49CGR	Vdet-IC	4.9V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P9C	-	XC6118C39CGR-G	Vdet-IC	3.9V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
P9D	-	XC6108N49DGR	Vdet-IC	4.9V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
P9D	-	XC6118C39DGR-G	Vdet-IC	3.9V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
pA	-	74AUP1G00GF	CMOS-Log	2-input NAND gate	SOT891	52	Log1	9z	Nxp
pA	-	74AUP1G00GM	CMOS-Log	2-input NAND gate	SOT886	57	Log1	9z	Nxp
pA	-	74AUP1G00GN	CMOS-Log	2-input NAND gate	SOT1115	52	Log1	9z	Nxp
pA	-	74AUP1G00GS	CMOS-Log	2-input NAND gate	SOT1202	52	Log1	9z	Nxp
pA	-	74AUP1G00GX	CMOS-Log	2-input NAND gate	SOT-1226	A48	Log1	9z	Nxp
PA	-	2PA1774RM	Si-pnp	LN, 50V, 100mA, 250mW, >100MHz, B=180..390	SOT-883	22ta	-	2a	Phi
PA	-	AP7361ADJFGE	LVR-IC	LDO, Adjustable 1.0..3.3V, 1A, +CE	U-DFN3030-8	92h5	VR16	9u	Di
PA	-	CHT92T1PT	Si-pnp	Vid, Drv, 300V, 300mA, B=50..240, 50MHz	FBPT-523	17ta	-	9a	Chm
PA	-	DW84C27NND03	Z-diode	27V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
PA	-	EUA4890H	Lin-IC	AF PA, BTL, 3..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Eut
PA	-	KDV142UL	PIN-diode	Sw, RF-att, 30V, 100mA, Vf<1V(10mA), 0.35pF	ULP-2	13d	-	2b	Kec
PA	-	R1118K081D	LVR-IC	0.8V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PA	-	RP106K071D	LVR-IC	LDO, 0.7V±0.8%, 400mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
PA096	-	XC9226A096D	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA09C	-	XC9226A09CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA0M6	-	XC9226A0M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA0MC	-	XC9226A0MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA106	-	XC9226A106D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA10C	-	XC9226A10CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA116	-	XC9226A116D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA11C	-	XC9226A11CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA126	-	XC9226A126D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA12C	-	XC9226A12CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA136	-	XC9226A136D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA13C	-	XC9226A13CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA146	-	XC9226A146D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA14C	-	XC9226A14CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA156	-	XC9226A156D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA15C	-	XC9226A15CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA166	-	XC9226A166D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA16C	-	XC9226A16CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PA176	-	XC9226A176D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA17C	-	XC9226A17CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA186	-	XC9226A186D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA18C	-	XC9226A18CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA196	-	XC9226A196D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA19C	-	XC9226A19CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1A6	-	XC9226A1A6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1AC	-	XC9226A1ACD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1B6	-	XC9226A1B6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1BC	-	XC9226A1BCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1C6	-	XC9226A1C6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1CC	-	XC9226A1CCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1D6	-	XC9226A1D6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1DC	-	XC9226A1DCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1E6	-	XC9226A1E6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1EC	-	XC9226A1ECD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1F6	-	XC9226A1F6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1FC	-	XC9226A1FCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1H6	-	XC9226A1H6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1HC	-	XC9226A1HCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1K6	-	XC9226A1K6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1KC	-	XC9226A1KCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1L6	-	XC9226A1L6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1LC	-	XC9226A1LCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1M6	-	XC9226A1M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA1MC	-	XC9226A1MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA206	-	XC9226A206D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA20C	-	XC9226A20CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA216	-	XC6121A216ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA216	-	XC9226A216D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA217	-	XC6121A217ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA218	-	XC6121A218ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA219	-	XC6121A219ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA21C	-	XC9226A21CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA220	-	XC6121A220ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA221	-	XC6121A221ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA222	-	XC6121A222ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA223	-	XC6121A223ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA224	-	XC6121A224ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA225	-	XC6121A225ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA226	-	XC6121A226ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA226	-	XC9226A226D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA227	-	XC6121A227ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA228	-	XC6121A228ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA229	-	XC6121A229ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA22C	-	XC9226A22CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA230	-	XC6121A230ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA231	-	XC6121A231ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA232	-	XC6121A232ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA233	-	XC6121A233ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA234	-	XC6121A234ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA235	-	XC6121A235ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA236	-	XC6121A236ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA236	-	XC9226A236D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA237	-	XC6121A237ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA238	-	XC6121A238ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA239	-	XC6121A239ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA23C	-	XC9226A23CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA240	-	XC6121A240ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA241	-	XC6121A241ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA242	-	XC6121A242ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA243	-	XC6121A243ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA244	-	XC6121A244ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA245	-	XC6121A245ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA246	-	XC6121A246ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA246	-	XC9226A246D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA247	-	XC6121A247ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA248	-	XC6121A248ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA249	-	XC6121A249ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA24C	-	XC9226A24CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PA250	-	XC6121A250ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA256	-	XC9226A256D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA25C	-	XC9226A25CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA266	-	XC9226A266D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA26C	-	XC9226A26CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA276	-	XC9226A276D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA27C	-	XC9226A27CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA286	-	XC9226A286D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA28C	-	XC9226A28CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA296	-	XC9226A296D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA29C	-	XC9226A29CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2A6	-	XC9226A2A6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2AC	-	XC9226A2ACD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2B6	-	XC9226A2B6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2BC	-	XC9226A2BCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2C6	-	XC9226A2C6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2CC	-	XC9226A2CCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2D6	-	XC9226A2D6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2DC	-	XC9226A2DCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2E6	-	XC9226A2E6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2EC	-	XC9226A2ECD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2F6	-	XC9226A2F6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2FC	-	XC9226A2FCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2H6	-	XC9226A2H6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2HC	-	XC9226A2HCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2K6	-	XC9226A2K6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2KC	-	XC9226A2KCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2L6	-	XC9226A2L6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2LC	-	XC9226A2LCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2M6	-	XC9226A2M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA2MC	-	XC9226A2MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA306	-	XC9226A306D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA30C	-	XC9226A30CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA316	-	XC6121A316ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA316	-	XC9226A316D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA317	-	XC6121A317ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA318	-	XC6121A318ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA319	-	XC6121A319ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA31C	-	XC9226A31CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA320	-	XC6121A320ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA321	-	XC6121A321ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA322	-	XC6121A322ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA323	-	XC6121A323ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA324	-	XC6121A324ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA325	-	XC6121A325ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA326	-	XC6121A326ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA326	-	XC9226A326D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA327	-	XC6121A327ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA328	-	XC6121A328ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA329	-	XC6121A329ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA32C	-	XC9226A32CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA330	-	XC6121A330ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA331	-	XC6121A331ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA332	-	XC6121A332ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA333	-	XC6121A333ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA334	-	XC6121A334ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA335	-	XC6121A335ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA336	-	XC6121A336ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA336	-	XC9226A336D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA337	-	XC6121A337ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA338	-	XC6121A338ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA339	-	XC6121A339ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA33C	-	XC9226A33CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA340	-	XC6121A340ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA341	-	XC6121A341ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA342	-	XC6121A342ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA343	-	XC6121A343ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA344	-	XC6121A344ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA345	-	XC6121A345ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA346	-	XC6121A346ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PA346	-	XC9226A346D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA347	-	XC6121A347ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA348	-	XC6121A348ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA349	-	XC6121A349ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA34C	-	XC9226A34CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA350	-	XC6121A350ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA356	-	XC9226A356D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA35C	-	XC9226A35CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA366	-	XC9226A366D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA36C	-	XC9226A36CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA376	-	XC9226A376D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA37C	-	XC9226A37CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA386	-	XC9226A386D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA38C	-	XC9226A38CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA396	-	XC9226A396D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA39C	-	XC9226A39CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3A6	-	XC9226A3A6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3AC	-	XC9226A3ACD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3B6	-	XC9226A3B6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3BC	-	XC9226A3BCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3C6	-	XC9226A3C6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3CC	-	XC9226A3CCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3D6	-	XC9226A3D6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3DC	-	XC9226A3DCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3E6	-	XC9226A3E6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3EC	-	XC9226A3ECD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3F6	-	XC9226A3F6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3FC	-	XC9226A3FCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3H6	-	XC9226A3H6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3HC	-	XC9226A3HCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3K6	-	XC9226A3K6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3KC	-	XC9226A3KCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3L6	-	XC9226A3L6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3LC	-	XC9226A3LCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3M6	-	XC9226A3M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA3MC	-	XC9226A3MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA406	-	XC9226A406D	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA40C	-	XC9226A40CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PA416	-	XC6121A416ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA417	-	XC6121A417ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA418	-	XC6121A418ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA419	-	XC6121A419ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA420	-	XC6121A420ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA421	-	XC6121A421ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA422	-	XC6121A422ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA423	-	XC6121A423ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA424	-	XC6121A424ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA425	-	XC6121A425ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA426	-	XC6121A426ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA427	-	XC6121A427ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA428	-	XC6121A428ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA429	-	XC6121A429ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA430	-	XC6121A430ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA431	-	XC6121A431ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA432	-	XC6121A432ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA433	-	XC6121A433ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA434	-	XC6121A434ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA435	-	XC6121A435ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA436	-	XC6121A436ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA437	-	XC6121A437ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA438	-	XC6121A438ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA439	-	XC6121A439ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA440	-	XC6121A440ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA441	-	XC6121A441ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA442	-	XC6121A442ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA443	-	XC6121A443ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA444	-	XC6121A444ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA445	-	XC6121A445ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA446	-	XC6121A446ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA447	-	XC6121A447ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PA448	-	XC6121A448ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA449	-	XC6121A449ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA450	-	XC6121A450ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA516	-	XC6121A516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA517	-	XC6121A517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA518	-	XC6121A518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA519	-	XC6121A519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA520	-	XC6121A520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA521	-	XC6121A521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA522	-	XC6121A522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA523	-	XC6121A523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA524	-	XC6121A524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA525	-	XC6121A525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA526	-	XC6121A526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA527	-	XC6121A527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA528	-	XC6121A528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA529	-	XC6121A529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA530	-	XC6121A530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA531	-	XC6121A531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA532	-	XC6121A532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA533	-	XC6121A533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA534	-	XC6121A534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA535	-	XC6121A535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA536	-	XC6121A536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA537	-	XC6121A537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA538	-	XC6121A538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA539	-	XC6121A539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA540	-	XC6121A540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA541	-	XC6121A541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA542	-	XC6121A542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA543	-	XC6121A543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA544	-	XC6121A544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA545	-	XC6121A545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA546	-	XC6121A546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA547	-	XC6121A547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA548	-	XC6121A548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA549	-	XC6121A549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA550	-	XC6121A550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA616	-	XC6121A616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA617	-	XC6121A617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA618	-	XC6121A618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA619	-	XC6121A619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA620	-	XC6121A620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA621	-	XC6121A621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA622	-	XC6121A622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA623	-	XC6121A623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA624	-	XC6121A624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA625	-	XC6121A625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA626	-	XC6121A626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA627	-	XC6121A627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA628	-	XC6121A628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA629	-	XC6121A629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA630	-	XC6121A630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA631	-	XC6121A631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA632	-	XC6121A632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA633	-	XC6121A633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA634	-	XC6121A634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA635	-	XC6121A635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA636	-	XC6121A636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA637	-	XC6121A637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA638	-	XC6121A638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA639	-	XC6121A639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA640	-	XC6121A640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA641	-	XC6121A641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA642	-	XC6121A642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA643	-	XC6121A643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA644	-	XC6121A644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA645	-	XC6121A645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA646	-	XC6121A646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA647	-	XC6121A647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PA648	-	XC6121A648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA649	-	XC6121A649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA650	-	XC6121A650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA716	-	XC6121A716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA717	-	XC6121A717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA718	-	XC6121A718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA719	-	XC6121A719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA720	-	XC6121A720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA721	-	XC6121A721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA722	-	XC6121A722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA723	-	XC6121A723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA724	-	XC6121A724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA725	-	XC6121A725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA726	-	XC6121A726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA727	-	XC6121A727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA728	-	XC6121A728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA729	-	XC6121A729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA730	-	XC6121A730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA731	-	XC6121A731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA732	-	XC6121A732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA733	-	XC6121A733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA734	-	XC6121A734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA735	-	XC6121A735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA736	-	XC6121A736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA737	-	XC6121A737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA738	-	XC6121A738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA739	-	XC6121A739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA740	-	XC6121A740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA741	-	XC6121A741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA742	-	XC6121A742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA743	-	XC6121A743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA744	-	XC6121A744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA745	-	XC6121A745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA746	-	XC6121A746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA747	-	XC6121A747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA748	-	XC6121A748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA749	-	XC6121A749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
PA750	-	XC6121A750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
pB	-	74AUP1G02GF	CMOS-Log	2-input NOR gate	SOT891	52	Log2	9z	Nxp
pB	-	74AUP1G02GM	CMOS-Log	2-input NOR gate	SOT886	57	Log2	9z	Nxp
pB	-	74AUP1G02GN	CMOS-Log	2-input NOR gate	SOT1115	52	Log2	9z	Nxp
pB	-	74AUP1G02GS	CMOS-Log	2-input NOR gate	SOT1202	52	Log2	9z	Nxp
pB	-	74AUP1G02GX	CMOS-Log	2-input NOR gate	SOT-1226	A48	Log2	9z	Nxp
PB	-	2PA1774QM	Si-pnp	LN, 50V, 100mA, 250mW, >100MHz, B=120..270	SOT-883	22ta	-	2a	Phi
PB	-	AP7361-10FGE	LVR-IC	LDO, 1.0V±2%, 1A, +CE	U-DFN3030-8	92h6	VR4	9u	Di
PB	-	DW84C30NND03	Z-diode	30V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
PB	-	KDV143UL	PIN-diode	Sw, RF-att, 30V, 100mA, Vf<0.9V(2mA), 0.43pF	ULP-2	13d	-	2b	Kec
PB	-	R1118K091D	LVR-IC	0.9V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PB	-	RP106K081D	LVR-IC	LDO, 0.8V±0.8%, 400mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
PB051	-	TPA2005D1GQY	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 1.4W(5V/8Ω), shutdown	BGA-15	39	-	9a	Ti
PB096	-	XC9226B096D	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB09C	-	XC9226B09CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB0M6	-	XC9226B0M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB0MC	-	XC9226B0MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB106	-	XC9226B106D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB10C	-	XC9226B10CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB116	-	XC9226B116D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB11C	-	XC9226B11CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB126	-	XC9226B126D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB12C	-	XC9226B12CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB136	-	XC9226B136D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB13C	-	XC9226B13CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB146	-	XC9226B146D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB14C	-	XC9226B14CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB156	-	XC9226B156D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB15C	-	XC9226B15CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB166	-	XC9226B166D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB16C	-	XC9226B16CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB176	-	XC9226B176D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB17C	-	XC9226B17CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PB186	-	XC9226B186D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB18C	-	XC9226B18CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB196	-	XC9226B196D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB19C	-	XC9226B19CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1A6	-	XC9226B1A6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1AC	-	XC9226B1ACD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1B6	-	XC9226B1B6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1BC	-	XC9226B1BCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1C6	-	XC9226B1C6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1CC	-	XC9226B1CCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1D6	-	XC9226B1D6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1DC	-	XC9226B1DCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1E6	-	XC9226B1E6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1EC	-	XC9226B1ECD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1F6	-	XC9226B1F6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1FC	-	XC9226B1FCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1H6	-	XC9226B1H6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1HC	-	XC9226B1HCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1K6	-	XC9226B1K6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1KC	-	XC9226B1KCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1L6	-	XC9226B1L6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1LC	-	XC9226B1LCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1M6	-	XC9226B1M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB1MC	-	XC9226B1MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB206	-	XC9226B206D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB20C	-	XC9226B20CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB216	-	XC9226B216D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB21C	-	XC9226B21CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB226	-	XC9226B226D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB22C	-	XC9226B22CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB236	-	XC9226B236D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB23C	-	XC9226B23CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB246	-	XC9226B246D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB24C	-	XC9226B24CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB256	-	XC9226B256D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB25C	-	XC9226B25CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB266	-	XC9226B266D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB26C	-	XC9226B26CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB276	-	XC9226B276D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB27C	-	XC9226B27CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB286	-	XC9226B286D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB28C	-	XC9226B28CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB296	-	XC9226B296D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB29C	-	XC9226B29CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2A6	-	XC9226B2A6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2AC	-	XC9226B2ACD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2B6	-	XC9226B2B6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2BC	-	XC9226B2BCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2C6	-	XC9226B2C6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2CC	-	XC9226B2CCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2D6	-	XC9226B2D6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2DC	-	XC9226B2DCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2E6	-	XC9226B2E6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2EC	-	XC9226B2ECD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2F6	-	XC9226B2F6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2FC	-	XC9226B2FCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2H6	-	XC9226B2H6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2HC	-	XC9226B2HCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2K6	-	XC9226B2K6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2KC	-	XC9226B2KCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2L6	-	XC9226B2L6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2LC	-	XC9226B2LCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2M6	-	XC9226B2M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB2MC	-	XC9226B2MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB306	-	XC9226B306D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB30C	-	XC9226B30CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB316	-	XC9226B316D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB31C	-	XC9226B31CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB326	-	XC9226B326D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB32C	-	XC9226B32CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PB336	-	XC9226B336D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB33C	-	XC9226B33CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB346	-	XC9226B346D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB34C	-	XC9226B34CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB356	-	XC9226B356D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB35C	-	XC9226B35CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB366	-	XC9226B366D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB36C	-	XC9226B36CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB376	-	XC9226B376D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB37C	-	XC9226B37CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB386	-	XC9226B386D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB38C	-	XC9226B38CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB396	-	XC9226B396D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB39C	-	XC9226B39CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3A6	-	XC9226B3A6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3AC	-	XC9226B3ACD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3B6	-	XC9226B3B6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3BC	-	XC9226B3BCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3C6	-	XC9226B3C6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3CC	-	XC9226B3CCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3D6	-	XC9226B3D6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3DC	-	XC9226B3DCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3E6	-	XC9226B3E6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3EC	-	XC9226B3ECD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3F6	-	XC9226B3F6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3FC	-	XC9226B3FCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3H6	-	XC9226B3H6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3HC	-	XC9226B3HCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3K6	-	XC9226B3K6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3KC	-	XC9226B3KCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3L6	-	XC9226B3L6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3LC	-	XC9226B3LCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3M6	-	XC9226B3M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB3MC	-	XC9226B3MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB406	-	XC9226B406D	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PB40C	-	XC9226B40CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
pC	-	74AUP1G04GF	CMOS-Log	Inverter	SOT891	52	Log6	9z	Nxp
pC	-	74AUP1G04GM	CMOS-Log	Inverter	SOT886	57	Log6	9z	Nxp
pC	-	74AUP1G04GN	CMOS-Log	Inverter	SOT1115	52	Log6	9z	Nxp
pC	-	74AUP1G04GS	CMOS-Log	Inverter	SOT1202	52	Log6	9z	Nxp
pC	-	74AUP1G04GX	CMOS-Log	Inverter	SOT-1226	A48	Log6	9z	Nxp
PC	-	2PA1774SM	Si-pnp	LN, 50V, 100mA, 250mW, >100MHz, B=270..560	SOT-883	22ta	-	2a	Phi
PC	-	AP7361-12FGE	LVR-IC	LDO, 1.2V±2%, 1A, +CE	U-DFN3030-8	92h6	VR4	9u	Di
PC	-	DW84C33NND03	Z-diode	33V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
PC	-	R1118K101D	LVR-IC	1.0V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PC	-	RP106K091D	LVR-IC	LDO, 0.9V±0.8%, 400mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
PC096	-	XC9226C096D	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC09C	-	XC9226C09CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC0M6	-	XC9226C0M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC0MC	-	XC9226C0MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC106	-	XC9226C106D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC10C	-	XC9226C10CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC116	-	XC9226C116D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC11C	-	XC9226C11CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC126	-	XC9226C126D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC12C	-	XC9226C12CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC136	-	XC9226C136D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC13C	-	XC9226C13CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC146	-	XC9226C146D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC14C	-	XC9226C14CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC156	-	XC9226C156D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC15C	-	XC9226C15CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC166	-	XC9226C166D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC16C	-	XC9226C16CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC176	-	XC9226C176D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC17C	-	XC9226C17CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC186	-	XC9226C186D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC18C	-	XC9226C18CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC196	-	XC9226C196D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC19C	-	XC9226C19CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PC1A6	-	XC9226C1A6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1AC	-	XC9226C1ACD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1B6	-	XC9226C1B6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1BC	-	XC9226C1BCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1C6	-	XC9226C1C6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1CC	-	XC9226C1CCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1D6	-	XC9226C1D6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1DC	-	XC9226C1DCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1E6	-	XC9226C1E6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1EC	-	XC9226C1ECD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1F6	-	XC9226C1F6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1FC	-	XC9226C1FCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1H6	-	XC9226C1H6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1HC	-	XC9226C1HCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1K6	-	XC9226C1K6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1KC	-	XC9226C1KCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1L6	-	XC9226C1L6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1LC	-	XC9226C1LCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1M6	-	XC9226C1M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC1MC	-	XC9226C1MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC206	-	XC9226C206D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC20C	-	XC9226C20CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC216	-	XC6121C216ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC216	-	XC9226C216D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC217	-	XC6121C217ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC218	-	XC6121C218ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC219	-	XC6121C219ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC21C	-	XC9226C21CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC220	-	XC6121C220ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC221	-	XC6121C221ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC222	-	XC6121C222ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC223	-	XC6121C223ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC224	-	XC6121C224ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC225	-	XC6121C225ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC226	-	XC6121C226ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC226	-	XC9226C226D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC227	-	XC6121C227ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC228	-	XC6121C228ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC229	-	XC6121C229ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC22C	-	XC9226C22CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC230	-	XC6121C230ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC231	-	XC6121C231ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC232	-	XC6121C232ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC233	-	XC6121C233ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC234	-	XC6121C234ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC235	-	XC6121C235ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC236	-	XC6121C236ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC236	-	XC9226C236D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC237	-	XC6121C237ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC238	-	XC6121C238ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC239	-	XC6121C239ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC23C	-	XC9226C23CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC240	-	XC6121C240ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC241	-	XC6121C241ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC242	-	XC6121C242ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC243	-	XC6121C243ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC244	-	XC6121C244ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC245	-	XC6121C245ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC246	-	XC6121C246ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC246	-	XC9226C246D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC247	-	XC6121C247ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC248	-	XC6121C248ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC249	-	XC6121C249ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC24C	-	XC9226C24CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC250	-	XC6121C250ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC256	-	XC9226C256D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC25C	-	XC9226C25CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC266	-	XC9226C266D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC26C	-	XC9226C26CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC276	-	XC9226C276D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PC27C	-	XC9226C27CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC286	-	XC9226C286D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC28C	-	XC9226C28CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC296	-	XC9226C296D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC29C	-	XC9226C29CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2A6	-	XC9226C2A6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2AC	-	XC9226C2ACD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2B6	-	XC9226C2B6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2BC	-	XC9226C2BCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2C6	-	XC9226C2C6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2CC	-	XC9226C2CCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2D6	-	XC9226C2D6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2DC	-	XC9226C2DCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2E6	-	XC9226C2E6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2EC	-	XC9226C2ECD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2F6	-	XC9226C2F6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2FC	-	XC9226C2FCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2H6	-	XC9226C2H6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2HC	-	XC9226C2HCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2K6	-	XC9226C2K6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2KC	-	XC9226C2KCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2L6	-	XC9226C2L6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2LC	-	XC9226C2LCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2M6	-	XC9226C2M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC2MC	-	XC9226C2MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC306	-	XC9226C306D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC30C	-	XC9226C30CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC316	-	XC6121C316ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC316	-	XC9226C316D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC317	-	XC6121C317ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC318	-	XC6121C318ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC319	-	XC6121C319ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC31C	-	XC9226C31CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC320	-	XC6121C320ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC321	-	XC6121C321ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC322	-	XC6121C322ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC323	-	XC6121C323ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC324	-	XC6121C324ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC325	-	XC6121C325ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC326	-	XC6121C326ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC326	-	XC9226C326D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC327	-	XC6121C327ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC328	-	XC6121C328ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC329	-	XC6121C329ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC32C	-	XC9226C32CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC330	-	XC6121C330ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC331	-	XC6121C331ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC332	-	XC6121C332ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC333	-	XC6121C333ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC334	-	XC6121C334ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC335	-	XC6121C335ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC336	-	XC6121C336ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC336	-	XC9226C336D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC337	-	XC6121C337ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC338	-	XC6121C338ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC339	-	XC6121C339ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC33C	-	XC9226C33CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC340	-	XC6121C340ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC341	-	XC6121C341ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC342	-	XC6121C342ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC343	-	XC6121C343ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC344	-	XC6121C344ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC345	-	XC6121C345ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC346	-	XC6121C346ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC346	-	XC9226C346D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC347	-	XC6121C347ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC348	-	XC6121C348ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC349	-	XC6121C349ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC34C	-	XC9226C34CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC350	-	XC6121C350ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PC356	-	XC9226C356D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC35C	-	XC9226C35CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC366	-	XC9226C366D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC36C	-	XC9226C36CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC376	-	XC9226C376D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC37C	-	XC9226C37CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC386	-	XC9226C386D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC38C	-	XC9226C38CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC396	-	XC9226C396D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC39C	-	XC9226C39CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3A6	-	XC9226C3A6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3AC	-	XC9226C3ACD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3B6	-	XC9226C3B6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3BC	-	XC9226C3BCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3C6	-	XC9226C3C6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3CC	-	XC9226C3CCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3D6	-	XC9226C3D6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3DC	-	XC9226C3DCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3E6	-	XC9226C3E6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3EC	-	XC9226C3ECD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3F6	-	XC9226C3F6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3FC	-	XC9226C3FCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3H6	-	XC9226C3H6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3HC	-	XC9226C3HCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3K6	-	XC9226C3K6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3KC	-	XC9226C3KCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3L6	-	XC9226C3L6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3LC	-	XC9226C3LCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3M6	-	XC9226C3M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC3MC	-	XC9226C3MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC406	-	XC9226C406D	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC40C	-	XC9226C40CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PC416	-	XC6121C416ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC417	-	XC6121C417ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC418	-	XC6121C418ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC419	-	XC6121C419ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC420	-	XC6121C420ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC421	-	XC6121C421ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC422	-	XC6121C422ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC423	-	XC6121C423ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC424	-	XC6121C424ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC425	-	XC6121C425ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC426	-	XC6121C426ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC427	-	XC6121C427ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC428	-	XC6121C428ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC429	-	XC6121C429ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC430	-	XC6121C430ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC431	-	XC6121C431ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC432	-	XC6121C432ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC433	-	XC6121C433ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC434	-	XC6121C434ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC435	-	XC6121C435ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC436	-	XC6121C436ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC437	-	XC6121C437ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC438	-	XC6121C438ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC439	-	XC6121C439ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC440	-	XC6121C440ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC441	-	XC6121C441ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC442	-	XC6121C442ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC443	-	XC6121C443ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC444	-	XC6121C444ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC445	-	XC6121C445ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC446	-	XC6121C446ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC447	-	XC6121C447ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC448	-	XC6121C448ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC449	-	XC6121C449ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC450	-	XC6121C450ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC516	-	XC6121C516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC517	-	XC6121C517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC518	-	XC6121C518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PC519	-	XC6121C519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC520	-	XC6121C520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC521	-	XC6121C521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC522	-	XC6121C522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC523	-	XC6121C523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC524	-	XC6121C524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC525	-	XC6121C525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC526	-	XC6121C526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC527	-	XC6121C527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC528	-	XC6121C528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC529	-	XC6121C529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC530	-	XC6121C530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC531	-	XC6121C531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC532	-	XC6121C532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC533	-	XC6121C533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC534	-	XC6121C534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC535	-	XC6121C535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC536	-	XC6121C536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC537	-	XC6121C537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC538	-	XC6121C538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC539	-	XC6121C539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC540	-	XC6121C540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC541	-	XC6121C541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC542	-	XC6121C542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC543	-	XC6121C543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC544	-	XC6121C544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC545	-	XC6121C545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC546	-	XC6121C546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC547	-	XC6121C547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC548	-	XC6121C548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC549	-	XC6121C549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC550	-	XC6121C550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC616	-	XC6121C616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC617	-	XC6121C617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC618	-	XC6121C618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC619	-	XC6121C619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC620	-	XC6121C620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC621	-	XC6121C621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC622	-	XC6121C622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC623	-	XC6121C623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC624	-	XC6121C624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC625	-	XC6121C625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC626	-	XC6121C626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC627	-	XC6121C627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC628	-	XC6121C628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC629	-	XC6121C629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC630	-	XC6121C630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC631	-	XC6121C631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC632	-	XC6121C632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC633	-	XC6121C633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC634	-	XC6121C634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC635	-	XC6121C635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC636	-	XC6121C636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC637	-	XC6121C637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC638	-	XC6121C638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC639	-	XC6121C639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC640	-	XC6121C640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC641	-	XC6121C641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC642	-	XC6121C642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC643	-	XC6121C643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC644	-	XC6121C644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC645	-	XC6121C645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC646	-	XC6121C646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC647	-	XC6121C647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC648	-	XC6121C648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC649	-	XC6121C649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC650	-	XC6121C650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC716	-	XC6121C716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC717	-	XC6121C717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC718	-	XC6121C718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PC719	-	XC6121C719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC720	-	XC6121C720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC721	-	XC6121C721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC722	-	XC6121C722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC723	-	XC6121C723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC724	-	XC6121C724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC725	-	XC6121C725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC726	-	XC6121C726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC727	-	XC6121C727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC728	-	XC6121C728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC729	-	XC6121C729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC730	-	XC6121C730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC731	-	XC6121C731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC732	-	XC6121C732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC733	-	XC6121C733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC734	-	XC6121C734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC735	-	XC6121C735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC736	-	XC6121C736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC737	-	XC6121C737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC738	-	XC6121C738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC739	-	XC6121C739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC740	-	XC6121C740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC741	-	XC6121C741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC742	-	XC6121C742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC743	-	XC6121C743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC744	-	XC6121C744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC745	-	XC6121C745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC746	-	XC6121C746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC747	-	XC6121C747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC748	-	XC6121C748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC749	-	XC6121C749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
PC750	-	XC6121C750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
pD	-	74AUP1GU04GF	CMOS-Log	Inverter	SOT891	52	Log6	9z	Nxp
pD	-	74AUP1GU04GM	CMOS-Log	Inverter	SOT886	57	Log6	9z	Nxp
pD	-	74AUP1GU04GN	CMOS-Log	Inverter	SOT1115	52	Log6	9z	Nxp
pD	-	74AUP1GU04GS	CMOS-Log	Inverter	SOT1202	52	Log6	9z	Nxp
pD	-	74AUP1GU04GX	CMOS-Log	Inverter	SOT-1226	A48	Log6	9z	Nxp
PD	-	AP7361-15FGE	LVR-IC	LDO, 1.5V±2%, 1A, +CE	U-DFN3030-8	92h6	VR4	9u	Di
PD	-	DW84C36NND03	Z-diode	36V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
PD	-	R1118K111D	LVR-IC	1.1V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PD	-	RP106K101D	LVR-IC	LDO, 1.0V±0.8%, 400mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
PD096	-	XC9226D096D	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD09C	-	XC9226D09CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD0M6	-	XC9226D0M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 0.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD0MC	-	XC9226D0MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 0.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD106	-	XC9226D106D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD10C	-	XC9226D10CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD116	-	XC9226D116D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD11C	-	XC9226D11CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD126	-	XC9226D126D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD12C	-	XC9226D12CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD136	-	XC9226D136D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD13C	-	XC9226D13CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD146	-	XC9226D146D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD14C	-	XC9226D14CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD156	-	XC9226D156D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD15C	-	XC9226D15CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD166	-	XC9226D166D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD16C	-	XC9226D16CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD176	-	XC9226D176D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD17C	-	XC9226D17CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD186	-	XC9226D186D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD18C	-	XC9226D18CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD196	-	XC9226D196D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD19C	-	XC9226D19CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1A6	-	XC9226D1A6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1AC	-	XC9226D1ACD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1B6	-	XC9226D1B6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1BC	-	XC9226D1BCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1C6	-	XC9226D1C6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PD1CC	-	XC9226D1CCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1D6	-	XC9226D1D6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1DC	-	XC9226D1DCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1E6	-	XC9226D1E6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1EC	-	XC9226D1ECD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1F6	-	XC9226D1F6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1FC	-	XC9226D1FCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1H6	-	XC9226D1H6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1HC	-	XC9226D1HCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1K6	-	XC9226D1K6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1KC	-	XC9226D1KCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1L6	-	XC9226D1L6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1LC	-	XC9226D1LCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1M6	-	XC9226D1M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 1.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD1MC	-	XC9226D1MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 1.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD206	-	XC9226D206D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD20C	-	XC9226D20CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD216	-	XC9226D216D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD21C	-	XC9226D21CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD226	-	XC9226D226D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD22C	-	XC9226D22CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD236	-	XC9226D236D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD23C	-	XC9226D23CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD246	-	XC9226D246D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD24C	-	XC9226D24CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD256	-	XC9226D256D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD25C	-	XC9226D25CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD266	-	XC9226D266D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD26C	-	XC9226D26CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD276	-	XC9226D276D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD27C	-	XC9226D27CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD286	-	XC9226D286D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD28C	-	XC9226D28CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD296	-	XC9226D296D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD29C	-	XC9226D29CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2A6	-	XC9226D2A6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2AC	-	XC9226D2ACD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2B6	-	XC9226D2B6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2BC	-	XC9226D2BCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2C6	-	XC9226D2C6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2CC	-	XC9226D2CCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2D6	-	XC9226D2D6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2DC	-	XC9226D2DCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2E6	-	XC9226D2E6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2EC	-	XC9226D2ECD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2F6	-	XC9226D2F6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2FC	-	XC9226D2FCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2H6	-	XC9226D2H6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2HC	-	XC9226D2HCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2K6	-	XC9226D2K6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2KC	-	XC9226D2KCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2L6	-	XC9226D2L6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2LC	-	XC9226D2LCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2M6	-	XC9226D2M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 2.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD2MC	-	XC9226D2MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 2.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD306	-	XC9226D306D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD30C	-	XC9226D30CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD316	-	XC6121D316ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD316	-	XC9226D316D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD317	-	XC6121D317ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD318	-	XC6121D318ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD319	-	XC6121D319ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD31C	-	XC9226D31CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD320	-	XC6121D320ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD321	-	XC6121D321ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD322	-	XC6121D322ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD323	-	XC6121D323ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD324	-	XC6121D324ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD325	-	XC6121D325ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD326	-	XC6121D326ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PD326	-	XC9226D326D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD327	-	XC6121D327ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD328	-	XC6121D328ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD329	-	XC6121D329ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD32C	-	XC9226D32CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD330	-	XC6121D330ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD331	-	XC6121D331ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD332	-	XC6121D332ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD333	-	XC6121D333ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD334	-	XC6121D334ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD335	-	XC6121D335ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD336	-	XC6121D336ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD336	-	XC9226D336D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD337	-	XC6121D337ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD338	-	XC6121D338ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD339	-	XC6121D339ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD33C	-	XC9226D33CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD340	-	XC6121D340ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD341	-	XC6121D341ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD342	-	XC6121D342ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD343	-	XC6121D343ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD344	-	XC6121D344ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD345	-	XC6121D345ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD346	-	XC6121D346ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD346	-	XC9226D346D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD347	-	XC6121D347ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD348	-	XC6121D348ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD349	-	XC6121D349ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD34C	-	XC9226D34CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD350	-	XC6121D350ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD356	-	XC9226D356D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD35C	-	XC9226D35CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD366	-	XC9226D366D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD36C	-	XC9226D36CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD376	-	XC9226D376D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD37C	-	XC9226D37CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD386	-	XC9226D386D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD38C	-	XC9226D38CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD396	-	XC9226D396D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD39C	-	XC9226D39CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3A6	-	XC9226D3A6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3AC	-	XC9226D3ACD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3B6	-	XC9226D3B6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3BC	-	XC9226D3BCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3C6	-	XC9226D3C6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3CC	-	XC9226D3CCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3D6	-	XC9226D3D6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3DC	-	XC9226D3DCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3E6	-	XC9226D3E6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3EC	-	XC9226D3ECD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3F6	-	XC9226D3F6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3FC	-	XC9226D3FCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3H6	-	XC9226D3H6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3HC	-	XC9226D3HCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3K6	-	XC9226D3K6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3KC	-	XC9226D3KCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3L6	-	XC9226D3L6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3LC	-	XC9226D3LCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3M6	-	XC9226D3M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD3MC	-	XC9226D3MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD406	-	XC9226D406D	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD40C	-	XC9226D40CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PD416	-	XC6121D416ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD417	-	XC6121D417ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD418	-	XC6121D418ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD419	-	XC6121D419ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD420	-	XC6121D420ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD421	-	XC6121D421ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD422	-	XC6121D422ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD423	-	XC6121D423ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PD424	-	XC6121D424ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD425	-	XC6121D425ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD426	-	XC6121D426ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD427	-	XC6121D427ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD428	-	XC6121D428ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD429	-	XC6121D429ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD430	-	XC6121D430ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD431	-	XC6121D431ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD432	-	XC6121D432ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD433	-	XC6121D433ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD434	-	XC6121D434ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD435	-	XC6121D435ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD436	-	XC6121D436ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD437	-	XC6121D437ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD438	-	XC6121D438ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD439	-	XC6121D439ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD440	-	XC6121D440ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD441	-	XC6121D441ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD442	-	XC6121D442ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD443	-	XC6121D443ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD444	-	XC6121D444ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD445	-	XC6121D445ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD446	-	XC6121D446ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD447	-	XC6121D447ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD448	-	XC6121D448ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD449	-	XC6121D449ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD450	-	XC6121D450ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD516	-	XC6121D516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD517	-	XC6121D517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD518	-	XC6121D518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD519	-	XC6121D519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD520	-	XC6121D520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD521	-	XC6121D521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD522	-	XC6121D522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD523	-	XC6121D523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD524	-	XC6121D524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD525	-	XC6121D525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD526	-	XC6121D526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD527	-	XC6121D527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD528	-	XC6121D528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD529	-	XC6121D529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD530	-	XC6121D530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD531	-	XC6121D531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD532	-	XC6121D532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD533	-	XC6121D533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD534	-	XC6121D534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD535	-	XC6121D535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD536	-	XC6121D536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD537	-	XC6121D537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD538	-	XC6121D538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD539	-	XC6121D539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD540	-	XC6121D540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD541	-	XC6121D541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD542	-	XC6121D542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD543	-	XC6121D543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD544	-	XC6121D544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD545	-	XC6121D545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD546	-	XC6121D546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD547	-	XC6121D547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD548	-	XC6121D548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD549	-	XC6121D549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD550	-	XC6121D550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD616	-	XC6121D616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD617	-	XC6121D617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD618	-	XC6121D618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD619	-	XC6121D619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD620	-	XC6121D620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD621	-	XC6121D621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD622	-	XC6121D622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD623	-	XC6121D623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PD624	-	XC6121D624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD625	-	XC6121D625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD626	-	XC6121D626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD627	-	XC6121D627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD628	-	XC6121D628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD629	-	XC6121D629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD630	-	XC6121D630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD631	-	XC6121D631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD632	-	XC6121D632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD633	-	XC6121D633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD634	-	XC6121D634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD635	-	XC6121D635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD636	-	XC6121D636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD637	-	XC6121D637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD638	-	XC6121D638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD639	-	XC6121D639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD640	-	XC6121D640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD641	-	XC6121D641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD642	-	XC6121D642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD643	-	XC6121D643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD644	-	XC6121D644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD645	-	XC6121D645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD646	-	XC6121D646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD647	-	XC6121D647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD648	-	XC6121D648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD649	-	XC6121D649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD650	-	XC6121D650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD716	-	XC6121D716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD717	-	XC6121D717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD718	-	XC6121D718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD719	-	XC6121D719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD720	-	XC6121D720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD721	-	XC6121D721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD722	-	XC6121D722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD723	-	XC6121D723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD724	-	XC6121D724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD725	-	XC6121D725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD726	-	XC6121D726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD727	-	XC6121D727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD728	-	XC6121D728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD729	-	XC6121D729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD730	-	XC6121D730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD731	-	XC6121D731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD732	-	XC6121D732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD733	-	XC6121D733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD734	-	XC6121D734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD735	-	XC6121D735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD736	-	XC6121D736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD737	-	XC6121D737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD738	-	XC6121D738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD739	-	XC6121D739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD740	-	XC6121D740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD741	-	XC6121D741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD742	-	XC6121D742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD743	-	XC6121D743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD744	-	XC6121D744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD745	-	XC6121D745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD746	-	XC6121D746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD747	-	XC6121D747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD748	-	XC6121D748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD749	-	XC6121D749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
PD750	-	XC6121D750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
pE	-	74AUP1G08GF	CMOS-Log	2-input AND gate	SOT891	52	Log3	9z	Nxp
pE	-	74AUP1G08GM	CMOS-Log	2-input AND gate	SOT886	57	Log3	9z	Nxp
pE	-	74AUP1G08GN	CMOS-Log	2-input AND gate	SOT1115	52	Log3	9z	Nxp
pE	-	74AUP1G08GS	CMOS-Log	2-input AND gate	SOT1202	52	Log3	9z	Nxp
pE	-	74AUP1G08GX	CMOS-Log	2-input AND gate	SOT-1226	A48	Log3	9z	Nxp
PE	-	AP7361-18FGE	LVR-IC	LDO, 1.8V±2%, 1A, +CE	U-DFN3030-8	92h6	VR4	9u	Di
PE	-	DW84C39NND03	Z-diode	39V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
PE	-	R1118K121D	LVR-IC	1.2V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PE	-	RP106K111D	LVR-IC	LDO, 1.1V±0.8%, 400mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
PE306	-	XC9226E306D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE30C	-	XC9226E30CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE316	-	XC9226E316D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE31C	-	XC9226E31CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE326	-	XC9226E326D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE32C	-	XC9226E32CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE336	-	XC9226E336D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE33C	-	XC9226E33CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE346	-	XC9226E346D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE34C	-	XC9226E34CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE356	-	XC9226E356D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE35C	-	XC9226E35CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE366	-	XC9226E366D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE36C	-	XC9226E36CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE376	-	XC9226E376D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE37C	-	XC9226E37CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE386	-	XC9226E386D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE38C	-	XC9226E38CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE396	-	XC9226E396D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE39C	-	XC9226E39CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3A6	-	XC9226E3A6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.05V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3AC	-	XC9226E3ACD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3B6	-	XC9226E3B6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.15V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3BC	-	XC9226E3BCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3C6	-	XC9226E3C6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.25V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3CC	-	XC9226E3CCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3D6	-	XC9226E3D6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.35V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3DC	-	XC9226E3DCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3E6	-	XC9226E3E6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.45V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3EC	-	XC9226E3ECD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3F6	-	XC9226E3F6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.55V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3FC	-	XC9226E3FCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3H6	-	XC9226E3H6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.65V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3HC	-	XC9226E3HCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3K6	-	XC9226E3K6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.75V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3KC	-	XC9226E3KCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3L6	-	XC9226E3L6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.85V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3LC	-	XC9226E3LCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3M6	-	XC9226E3M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.95V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE3MC	-	XC9226E3MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE406	-	XC9226E406D	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE40C	-	XC9226E40CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
PE416	-	XC6121E416ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE417	-	XC6121E417ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE418	-	XC6121E418ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE419	-	XC6121E419ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE420	-	XC6121E420ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE421	-	XC6121E421ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE422	-	XC6121E422ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE423	-	XC6121E423ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE424	-	XC6121E424ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE425	-	XC6121E425ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE426	-	XC6121E426ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE427	-	XC6121E427ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE428	-	XC6121E428ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE429	-	XC6121E429ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE430	-	XC6121E430ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE431	-	XC6121E431ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE432	-	XC6121E432ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE433	-	XC6121E433ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE434	-	XC6121E434ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE435	-	XC6121E435ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE436	-	XC6121E436ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE437	-	XC6121E437ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE438	-	XC6121E438ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE439	-	XC6121E439ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE440	-	XC6121E440ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE441	-	XC6121E441ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE442	-	XC6121E442ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PE443	-	XC6121E443ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE444	-	XC6121E444ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE445	-	XC6121E445ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE446	-	XC6121E446ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE447	-	XC6121E447ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE448	-	XC6121E448ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE449	-	XC6121E449ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE450	-	XC6121E450ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE516	-	XC6121E516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE517	-	XC6121E517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE518	-	XC6121E518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE519	-	XC6121E519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE520	-	XC6121E520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE521	-	XC6121E521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE522	-	XC6121E522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE523	-	XC6121E523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE524	-	XC6121E524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE525	-	XC6121E525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE526	-	XC6121E526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE527	-	XC6121E527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE528	-	XC6121E528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE529	-	XC6121E529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE530	-	XC6121E530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE531	-	XC6121E531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE532	-	XC6121E532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE533	-	XC6121E533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE534	-	XC6121E534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE535	-	XC6121E535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE536	-	XC6121E536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE537	-	XC6121E537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE538	-	XC6121E538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE539	-	XC6121E539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE540	-	XC6121E540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE541	-	XC6121E541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE542	-	XC6121E542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE543	-	XC6121E543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE544	-	XC6121E544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE545	-	XC6121E545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE546	-	XC6121E546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE547	-	XC6121E547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE548	-	XC6121E548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE549	-	XC6121E549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE550	-	XC6121E550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE616	-	XC6121E616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE617	-	XC6121E617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE618	-	XC6121E618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE619	-	XC6121E619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE620	-	XC6121E620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE621	-	XC6121E621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE622	-	XC6121E622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE623	-	XC6121E623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE624	-	XC6121E624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE625	-	XC6121E625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE626	-	XC6121E626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE627	-	XC6121E627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE628	-	XC6121E628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE629	-	XC6121E629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE630	-	XC6121E630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE631	-	XC6121E631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE632	-	XC6121E632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE633	-	XC6121E633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE634	-	XC6121E634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE635	-	XC6121E635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE636	-	XC6121E636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE637	-	XC6121E637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE638	-	XC6121E638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE639	-	XC6121E639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE640	-	XC6121E640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE641	-	XC6121E641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE642	-	XC6121E642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PE643	-	XC6121E643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE644	-	XC6121E644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE645	-	XC6121E645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE646	-	XC6121E646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE647	-	XC6121E647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE648	-	XC6121E648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE649	-	XC6121E649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE650	-	XC6121E650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE716	-	XC6121E716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE717	-	XC6121E717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE718	-	XC6121E718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE719	-	XC6121E719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE720	-	XC6121E720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE721	-	XC6121E721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE722	-	XC6121E722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE723	-	XC6121E723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE724	-	XC6121E724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE725	-	XC6121E725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE726	-	XC6121E726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE727	-	XC6121E727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE728	-	XC6121E728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE729	-	XC6121E729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE730	-	XC6121E730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE731	-	XC6121E731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE732	-	XC6121E732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE733	-	XC6121E733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE734	-	XC6121E734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE735	-	XC6121E735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE736	-	XC6121E736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE737	-	XC6121E737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE738	-	XC6121E738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE739	-	XC6121E739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE740	-	XC6121E740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE741	-	XC6121E741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE742	-	XC6121E742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE743	-	XC6121E743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE744	-	XC6121E744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE745	-	XC6121E745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE746	-	XC6121E746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE747	-	XC6121E747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE748	-	XC6121E748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE749	-	XC6121E749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
PE750	-	XC6121E750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
pF	-	74AUP1G14GF	CMOS-Log	Inverting Schmitt-trigger	SOT891	52	Log7	9z	Nxp
pF	-	74AUP1G14GM	CMOS-Log	Inverting Schmitt-trigger	SOT886	57	Log7	9z	Nxp
PF	-	AP7361-25FGE	LVR-IC	LDO, 2.5V±2%, 1A, +CE	U-DFN3030-8	92h6	VR4	9u	Di
PF	-	R1118K121D5	LVR-IC	1.25V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PF	-	RP106K121D	LVR-IC	LDO, 1.2V±0.8%, 400mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
PF306	-	XC9226F306D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF30C	-	XC9226F30CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF316	-	XC9226F316D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF31C	-	XC9226F31CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF326	-	XC9226F326D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF32C	-	XC9226F32CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF336	-	XC9226F336D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF33C	-	XC9226F33CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF346	-	XC9226F346D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF34C	-	XC9226F34CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF356	-	XC9226F356D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF35C	-	XC9226F35CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF366	-	XC9226F366D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF36C	-	XC9226F36CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF376	-	XC9226F376D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF37C	-	XC9226F37CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF386	-	XC9226F386D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF38C	-	XC9226F38CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF396	-	XC9226F396D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF39C	-	XC9226F39CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3A6	-	XC9226F3A6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.05V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3AC	-	XC9226F3ACD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PF3B6	-	XC9226F3B6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.15V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3BC	-	XC9226F3BCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3C6	-	XC9226F3C6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.25V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3CC	-	XC9226F3CCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3D6	-	XC9226F3D6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.35V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3DC	-	XC9226F3DCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3E6	-	XC9226F3E6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.45V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3EC	-	XC9226F3ECD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3F6	-	XC9226F3F6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.55V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3FC	-	XC9226F3FCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3H6	-	XC9226F3H6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.65V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3HC	-	XC9226F3HCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3K6	-	XC9226F3K6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.75V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3KC	-	XC9226F3KCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3L6	-	XC9226F3L6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.85V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3LC	-	XC9226F3LCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3M6	-	XC9226F3M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.95V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF3MC	-	XC9226F3MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF406	-	XC9226F406D	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF40C	-	XC9226F40CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
PF516	-	XC6121F516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF517	-	XC6121F517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF518	-	XC6121F518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF519	-	XC6121F519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF520	-	XC6121F520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF521	-	XC6121F521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF522	-	XC6121F522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF523	-	XC6121F523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF524	-	XC6121F524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF525	-	XC6121F525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF526	-	XC6121F526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF527	-	XC6121F527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF528	-	XC6121F528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF529	-	XC6121F529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF530	-	XC6121F530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF531	-	XC6121F531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF532	-	XC6121F532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF533	-	XC6121F533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF534	-	XC6121F534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF535	-	XC6121F535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF536	-	XC6121F536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF537	-	XC6121F537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF538	-	XC6121F538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF539	-	XC6121F539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF540	-	XC6121F540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF541	-	XC6121F541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF542	-	XC6121F542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF543	-	XC6121F543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF544	-	XC6121F544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF545	-	XC6121F545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF546	-	XC6121F546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF547	-	XC6121F547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF548	-	XC6121F548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF549	-	XC6121F549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF550	-	XC6121F550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF616	-	XC6121F616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF617	-	XC6121F617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF618	-	XC6121F618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF619	-	XC6121F619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF620	-	XC6121F620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF621	-	XC6121F621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF622	-	XC6121F622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF623	-	XC6121F623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF624	-	XC6121F624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF625	-	XC6121F625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF626	-	XC6121F626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF627	-	XC6121F627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF628	-	XC6121F628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF629	-	XC6121F629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF630	-	XC6121F630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor




SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PF631	-	XC6121F631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF632	-	XC6121F632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF633	-	XC6121F633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF634	-	XC6121F634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF635	-	XC6121F635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF636	-	XC6121F636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF637	-	XC6121F637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF638	-	XC6121F638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF639	-	XC6121F639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF640	-	XC6121F640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF641	-	XC6121F641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF642	-	XC6121F642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF643	-	XC6121F643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF644	-	XC6121F644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF645	-	XC6121F645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF646	-	XC6121F646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF647	-	XC6121F647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF648	-	XC6121F648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF649	-	XC6121F649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF650	-	XC6121F650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF716	-	XC6121F716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF717	-	XC6121F717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF718	-	XC6121F718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF719	-	XC6121F719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF720	-	XC6121F720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF721	-	XC6121F721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF722	-	XC6121F722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF723	-	XC6121F723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF724	-	XC6121F724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF725	-	XC6121F725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF726	-	XC6121F726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF727	-	XC6121F727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF728	-	XC6121F728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF729	-	XC6121F729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF730	-	XC6121F730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF731	-	XC6121F731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF732	-	XC6121F732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF733	-	XC6121F733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF734	-	XC6121F734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF735	-	XC6121F735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF736	-	XC6121F736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF737	-	XC6121F737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF738	-	XC6121F738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF739	-	XC6121F739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF740	-	XC6121F740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF741	-	XC6121F741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF742	-	XC6121F742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF743	-	XC6121F743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF744	-	XC6121F744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF745	-	XC6121F745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF746	-	XC6121F746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF747	-	XC6121F747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF748	-	XC6121F748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF749	-	XC6121F749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
PF750	-	XC6121F750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, +WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
pG	-	74AUP1G32GF	CMOS-Log	2-input OR gate	SOT891	52	Log4	9z	Nxp
pG	-	74AUP1G32GM	CMOS-Log	2-input OR gate	SOT886	57	Log4	9z	Nxp
PG	-	AP7361-28FGE	LVR-IC	LDO, 2.8V±2%, 1A, +CE	U-DFN3030-8	92h6	VR4	9u	Di
PG	-	R1118K131D	LVR-IC	1.3V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PG	-	RP106K131D	LVR-IC	LDO, 1.3V±0.8%, 400mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
PG8	-	MIC5370-3.0/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
PGZ	mb	MIC5310-3.0/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.8V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
pH	-	74AUP1G86GF	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT891	52	Log5	9z	Nxp
pH	-	74AUP1G86GM	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT886	57	Log5	9z	Nxp
PH	-	AP7361-33FGE	LVR-IC	LDO, 3.3V±2%, 1A, +CE	U-DFN3030-8	92h6	VR4	9u	Di
PH	-	R1118K141D	LVR-IC	1.4V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PH	-	RP106K141D	LVR-IC	LDO, 1.4V±0.8%, 400mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
PH306	-	XC9226H306D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH30C	-	XC9226H30CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH316	-	XC9226H316D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PH31C	-	XC9226H31CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH326	-	XC9226H326D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH32C	-	XC9226H32CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH336	-	XC9226H336D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH33C	-	XC9226H33CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH346	-	XC9226H346D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH34C	-	XC9226H34CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH356	-	XC9226H356D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH35C	-	XC9226H35CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH366	-	XC9226H366D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH36C	-	XC9226H36CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH376	-	XC9226H376D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH37C	-	XC9226H37CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH386	-	XC9226H386D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH38C	-	XC9226H38CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH396	-	XC9226H396D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH39C	-	XC9226H39CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3A6	-	XC9226H3A6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.05V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3AC	-	XC9226H3ACD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3B6	-	XC9226H3B6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.15V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3BC	-	XC9226H3BCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3C6	-	XC9226H3C6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.25V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3CC	-	XC9226H3CCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3D6	-	XC9226H3D6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.35V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3DC	-	XC9226H3DCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3E6	-	XC9226H3E6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.45V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3EC	-	XC9226H3ECD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3F6	-	XC9226H3F6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.55V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3FC	-	XC9226H3FCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3H6	-	XC9226H3H6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.65V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3HC	-	XC9226H3HCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3K6	-	XC9226H3K6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.75V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3KC	-	XC9226H3KCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3L6	-	XC9226H3L6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.85V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3LC	-	XC9226H3LCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3M6	-	XC9226H3M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.95V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH3MC	-	XC9226H3MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH406	-	XC9226H406D	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PH40C	-	XC9226H40CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
PHH	-	XC6602A111ER-G	LVR-IC	LDO, 1.1V±15mV, 1A, +CE, soft start	USP-6C	49gm	VR11	9a	Tor
pJ	-	74AUP1G17GF	CMOS-Log	Schmitt-trigger	SOT891	52	Log11	9z	Nxp
pJ	-	74AUP1G17GM	CMOS-Log	Schmitt-trigger	SOT886	57	Log11	9z	Nxp
PJ	-	R1118K151D	LVR-IC	1.5V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PJ	-	RP106K151D	LVR-IC	LDO, 1.5V±0.8%, 400mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
PJZ	mb	MIC5310-3.0/2.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.5V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
pK	-	74AUP2G14GF	CMOS-Log	Dual Schmitt-trigger inverter buffers	SOT891	52	Log34	9z	Nxp
pK	-	74AUP2G14GM	CMOS-Log	Dual Schmitt-trigger inverter buffers	SOT886	57	Log34	9z	Nxp
PK	-	R1118K161D	LVR-IC	1.6V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PK	-	RP106K161D	LVR-IC	LDO, 1.6V±0.8%, 400mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
PKK	-	XC6602A121ER-G	LVR-IC	LDO, 1.2V±20mV, 1A, +CE, soft start	USP-6C	49gm	VR11	9a	Tor
PKZ	mb	MIC5310-3.0/2.6YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.6V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
PL	-	MIC2211-3.0/2.7BML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(150mA)/2.7V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
PL	-	R1118K171D	LVR-IC	1.7V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PL	-	RP106K171D	LVR-IC	LDO, 1.7V±0.8%, 400mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
PL13	-	PLED13Q12	ESDP-diode	Vbr=13..26V, Vrwm=13V, 1A, 250V/µs	QFN	13d	-	2b	Lif
PL6	-	PLED6Q12	ESDP-diode	Vbr=6..16V, Vrwm=6V, 1A, 250V/µs	QFN	13d	-	2b	Lif
PL9	-	PLED9Q12	ESDP-diode	Vbr=9..18V, Vrwm=9V, 1A, 250V/µs	QFN	13d	-	2b	Lif
PLL	-	XC6602A131ER-G	LVR-IC	LDO, 1.3V±20mV, 1A, +CE, soft start	USP-6C	49gm	VR11	9a	Tor
pM	-	74AUP1G125GF	CMOS-Log	Bus buffer gate with 3-state output	SOT891	52	Log14	9z	Nxp
pM	-	74AUP1G125GM	CMOS-Log	Bus buffer gate with 3-state output	SOT886	57	Log14	9z	Nxp
PM	-	MIC2211-3.0/2.8BML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(150mA)/2.8V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
PM	-	R1118K181D	LVR-IC	1.8V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PM	-	RP106K181D	LVR-IC	LDO, 1.8V±0.8%, 400mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
PM8	-	MIC5370-3.0/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
PMA	-	NCP2823BFC	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/8Ω), shutdown	BGA-9	39	AFP45	9o	Ons
PMZ	mb	MIC5310-3.0/2.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.8V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
pN	-	74AUP1G126GF	CMOS-Log	Bus buffer gate with 3-state output	SOT891	52	Log13	9z	Nxp
pN	-	74AUP1G126GM	CMOS-Log	Bus buffer gate with 3-state output	SOT886	57	Log13	9z	Nxp
PN	-	MIC2211-3.0/2.85BML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(150mA)/2.85V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
PN	-	R1118K181D5	LVR-IC	1.85V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
PN	-	RP106K101D5	LVR-IC	LDO, 1.05V±0.8%, 400mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
PN20A	-	XC31BPN20AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2V±3%	USP-6B	49xr	VR4	9b	Tor
PN21A	-	XC31BPN21AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.1V±3%	USP-6B	49xr	VR4	9b	Tor
PN22A	-	XC31BPN22AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.2V±3%	USP-6B	49xr	VR4	9b	Tor
PN23A	-	XC31BPN23AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.3V±3%	USP-6B	49xr	VR4	9b	Tor
PN24A	-	XC31BPN24AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.4V±3%	USP-6B	49xr	VR4	9b	Tor
PN25A	-	XC31BPN25AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.5V±3%	USP-6B	49xr	VR4	9b	Tor
PN26A	-	XC31BPN26AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.6V±3%	USP-6B	49xr	VR4	9b	Tor
PN27A	-	XC31BPN27AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.7V±3%	USP-6B	49xr	VR4	9b	Tor
PN28A	-	XC31BPN28AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.8V±3%	USP-6B	49xr	VR4	9b	Tor
PN29A	-	XC31BPN29AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=2.9V±3%	USP-6B	49xr	VR4	9b	Tor
PN30A	-	XC31BPN30AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3V±3%	USP-6B	49xr	VR4	9b	Tor
PN31A	-	XC31BPN31AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.1V±3%	USP-6B	49xr	VR4	9b	Tor
PN32A	-	XC31BPN32AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.1V±3%	USP-6B	49xr	VR4	9b	Tor
PN33A	-	XC31BPN33AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.3V±3%	USP-6B	49xr	VR4	9b	Tor
PN34A	-	XC31BPN34AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.4V±3%	USP-6B	49xr	VR4	9b	Tor
PN35A	-	XC31BPN35AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.5V±3%	USP-6B	49xr	VR4	9b	Tor
PN36A	-	XC31BPN36AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.6V±3%	USP-6B	49xr	VR4	9b	Tor
PN37A	-	XC31BPN37AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.7V±3%	USP-6B	49xr	VR4	9b	Tor
PN38A	-	XC31BPN38AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.8V±3%	USP-6B	49xr	VR4	9b	Tor
PN39A	-	XC31BPN39AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=3.9V±3%	USP-6B	49xr	VR4	9b	Tor
PN40A	-	XC31BPN40AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4V±3%	USP-6B	49xr	VR4	9b	Tor
PN41A	-	XC31BPN41AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.1V±3%	USP-6B	49xr	VR4	9b	Tor
PN42A	-	XC31BPN42AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.2V±3%	USP-6B	49xr	VR4	9b	Tor
PN43A	-	XC31BPN43AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.3V±3%	USP-6B	49xr	VR4	9b	Tor
PN44A	-	XC31BPN44AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.4V±3%	USP-6B	49xr	VR4	9b	Tor
PN45A	-	XC31BPN45AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.5V±3%	USP-6B	49xr	VR4	9b	Tor
PN46A	-	XC31BPN46AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.6V±3%	USP-6B	49xr	VR4	9b	Tor
PN47A	-	XC31BPN47AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.7V±3%	USP-6B	49xr	VR4	9b	Tor
PN48A	-	XC31BPN48AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.8V±3%	USP-6B	49xr	VR4	9b	Tor
PN49A	-	XC31BPN49AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=4.9V±3%	USP-6B	49xr	VR4	9b	Tor
PN50A	-	XC31BPN50AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5V±3%	USP-6B	49xr	VR4	9b	Tor
PN51A	-	XC31BPN51AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.1V±3%	USP-6B	49xr	VR4	9b	Tor
PN52A	-	XC31BPN52AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.2V±3%	USP-6B	49xr	VR4	9b	Tor
PN53A	-	XC31BPN53AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.3V±3%	USP-6B	49xr	VR4	9b	Tor
PN54A	-	XC31BPN54AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.4V±3%	USP-6B	49xr	VR4	9b	Tor
PN55A	-	XC31BPN55AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.5V±3%	USP-6B	49xr	VR4	9b	Tor
PN56A	-	XC31BPN56AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.6V±3%	USP-6B	49xr	VR4	9b	Tor
PN57A	-	XC31BPN57AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.7V±3%	USP-6B	49xr	VR4	9b	Tor
PN58A	-	XC31BPN58AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.8V±3%	USP-6B	49xr	VR4	9b	Tor
PN59A	-	XC31BPN59AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=5.9V±3%	USP-6B	49xr	VR4	9b	Tor
PN60A	-	XC31BPN60AD	Tdet-IC	Sensor (-30..+80°C); t=25°C- Vout=6V±3%	USP-6B	49xr	VR4	9b	Tor
PNZ	mb	MIC5310-3.0/2.85YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.85V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
pP	-	74AUP1G79GF	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT891	52	Log20	9z	Nxp
pP	-	74AUP1G79GM	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT886	57	Log20	9z	Nxp
PP	-	MIC2211-3.0/3.0BML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(150mA)/3.0V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
PP	-	R1118K191D	LVR-IC	1.9V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PP	-	RP106K121D5	LVR-IC	LDO, 1.25V±0.8%, 400mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
PPG	-	MIC5335-3.0/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/1.8V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
PPJ	-	MIC5335-3.0/2.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.5V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
PPK	-	MIC5335-3.0/2.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.6V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
PPM	-	MIC5335-3.0/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.8V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
PPN	-	MIC5335-3.0/2.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.85V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
PPP	-	MIC5335-3.0/3.0YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
PPZ	mb	MIC5310-3.0/3.0YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
pQ	-	74AUP1T34GF	CMOS-Log	Dual supply translating buffer	SOT891	52	Log78	9z	Nxp
pQ	-	74AUP1T34GM	CMOS-Log	Dual supply translating buffer	SOT886	57	Log78	9z	Nxp
PQ	-	R1118K201D	LVR-IC	2V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PQ	-	RP106K181D5	LVR-IC	LDO, 1.85V±0.8%, 400mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
pR	-	74AUP1G06GF	CMOS-Log	Inverter (ODO)	SOT891	52	Log19	9z	Nxp
pR	-	74AUP1G06GM	CMOS-Log	Inverter (ODO)	SOT886	57	Log19	9z	Nxp
pR	-	74AUP1G06GN	CMOS-Log	Inverter (ODO)	SOT1115	52	Log19	9z	Nxp
pR	-	74AUP1G06GS	CMOS-Log	Inverter (ODO)	SOT1202	52	Log19	9z	Nxp
pR	-	74AUP1G06GX	CMOS-Log	Inverter (ODO)	SOT-1226	A48	Log19	9z	Nxp
PR	-	R1118K211D	LVR-IC	2.1V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PR	-	RP106K111D5	LVR-IC	LDO, 1.15V±0.8%, 400mA, +CE, CL	DFN1212-6	52vr2	VR4	9a	Ric
pS	-	74AUP1G07GF	CMOS-Log	Noninverting buffer/driver (ODO)	SOT891	52	Log8	9z	Nxp
pS	-	74AUP1G07GM	CMOS-Log	Noninverting buffer/driver (ODO)	SOT886	57	Log8	9z	Nxp
pS	-	74AUP1G07GN	CMOS-Log	Noninverting buffer/driver (ODO)	SOT1115	52	Log8	9z	Nxp
pS	-	74AUP1G07GS	CMOS-Log	Noninverting buffer/driver (ODO)	SOT1202	52	Log8	9z	Nxp



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
pS	-	74AUP1G07GX	CMOS-Log	Noninverting buffer/driver (ODO)	SOT-1226	A48	Log8	9z	Nxp
PS	-	74LVCE1G00FZ4	CMOS-Log	2-input NAND gate	DFN1410	52	Log1	9u	Di
PS	-	MIC2211-3.0/3.3BML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(150mA)/3.3V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
PS	-	R1118K221D	LVR-IC	2.2V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
pS8	-	74AUP1G885GD	CMOS-Log	Dual function gate	SOT996-2	54	Log61	9z	Nxp
pS8	-	74AUP1G885GM	CMOS-Log	Dual function gate	SOT902-1	51	Log61	9z	Nxp
pS8	-	74AUP1G885GT	CMOS-Log	Dual function gate	SOT833-1	53	Log61	9z	Nxp
pT	-	74AUP1G80GF	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT891	52	Log21	9z	Nxp
pT	-	74AUP1G80GM	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT886	57	Log21	9z	Nxp
PT	-	74LVCE1G02FZ4	CMOS-Log	2-input NOR gate	DFN1410	52	Log2	9u	Di
PT	-	CHT2907T1PT	Si-pnp	AF, Sw, 60V, 600mA, B=100..300, 200MHz	FBPT-523	17ta	-	9a	Chm
PT	-	R1118K231D	LVR-IC	2.3V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
pU	-	74AUP1G11GF	CMOS-Log	3-input AND gate	SOT891	52	Log30	9z	Nxp
pU	-	74AUP1G11GM	CMOS-Log	3-input AND gate	SOT886	57	Log30	9z	Nxp
PU	-	74LVCE1G04FZ4	CMOS-Log	Inverter	DFN1410	52	Log6	9u	Di
PU	-	R1118K241D	LVR-IC	2.4V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PV	-	R1118K251D	LVR-IC	2.5V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
pW	-	74AUP1G18GF	CMOS-Log	Noninverting 1-of-2 demultiplexer with 3-state deselected output	SOT891	52	Log44	9z	Nxp
pW	-	74AUP1G18GM	CMOS-Log	Noninverting 1-of-2 demultiplexer with 3-state deselected output	SOT886	57	Log44	9z	Nxp
PW	-	MIC2211-3.0/1.6BML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V(150mA)/1.6V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
PW	-	R1118K261D	LVR-IC	2.6V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PX	-	R1118K271D	LVR-IC	2.7V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
pY	-	74AUP1G19GF	CMOS-Log	1-of-2 decoder/demultiplexer	SOT891	52	Log47	9z	Nxp
pY	-	74AUP1G19GM	CMOS-Log	1-of-2 decoder/demultiplexer	SOT886	57	Log47	9z	Nxp
PY	-	R1118K281D	LVR-IC	2.8V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PZ	-	R1118K281D5	LVR-IC	2.85V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
PZ306	-	XC9226G306D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.0V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ30C	-	XC9226G30CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.0V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ316	-	XC9226G316D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.1V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ31C	-	XC9226G31CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.1V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ326	-	XC9226G326D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.2V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ32C	-	XC9226G32CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.2V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ336	-	XC9226G336D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.3V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ33C	-	XC9226G33CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.3V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ346	-	XC9226G346D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.4V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ34C	-	XC9226G34CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.4V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ356	-	XC9226G356D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.5V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ35C	-	XC9226G35CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.5V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ366	-	XC9226G366D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.6V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ36C	-	XC9226G36CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.6V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ376	-	XC9226G376D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.7V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ37C	-	XC9226G37CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.7V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ386	-	XC9226G386D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.8V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ38C	-	XC9226G38CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.8V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ396	-	XC9226G396D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.9V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ39C	-	XC9226G39CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.9V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3A6	-	XC9226G3A6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.05V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3AC	-	XC9226G3ACD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.05V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3B6	-	XC9226G3B6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.15V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3BC	-	XC9226G3BCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.15V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3C6	-	XC9226G3C6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.25V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3CC	-	XC9226G3CCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.25V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3D6	-	XC9226G3D6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.35V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3DC	-	XC9226G3DCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.35V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3E6	-	XC9226G3E6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.45V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3EC	-	XC9226G3ECD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.45V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3F6	-	XC9226G3F6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.55V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3FC	-	XC9226G3FCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.55V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3H6	-	XC9226G3H6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.65V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3HC	-	XC9226G3HCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.65V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3K6	-	XC9226G3K6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.75V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3KC	-	XC9226G3KCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.75V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3L6	-	XC9226G3L6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.85V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3LC	-	XC9226G3LCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.85V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3M6	-	XC9226G3M6D	DC-DC-IC	PWM/PFM step-down, 600kHz, 3.95V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ3MC	-	XC9226G3MCD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 3.95V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ406	-	XC9226G406D	DC-DC-IC	PWM/PFM step-down, 600kHz, 4.0V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
PZ40C	-	XC9226G40CD	DC-DC-IC	PWM/PFM step-down, 1.2MHz, 4.0V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
q	-	BU2JUA3WNVX	LVR-IC	LDO, 2.85V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
Q0	-	R3117K473A	Vdet-IC	4.7V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
Q0	-	RP114K081D	LVR-IC	LDO, 0.8V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
Q1	-	R3117K483A	Vdet-IC	4.8V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
Q1	-	RP114K091D	LVR-IC	LDO, 0.9V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
Q2	-	R3117K493A	Vdet-IC	4.9V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
Q2	-	RP114K101D	LVR-IC	LDO, 1.0V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
Q3	-	R3117K503A	Vdet-IC	5.0V±1%, -Reset ODO, Sense	DFN1010-4	48rq	VD11	9a	Ric
Q3	-	RP114K111D	LVR-IC	LDO, 1.1V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
Q4	-	RP114K121D	LVR-IC	LDO, 1.2V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
Q5	-	RP114K131D	LVR-IC	LDO, 1.3V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
Q6	-	RP114K141D	LVR-IC	LDO, 1.4V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
Q7	-	RP114K151D	LVR-IC	LDO, 1.5V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
Q8	-	RP114K161D	LVR-IC	LDO, 1.6V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
Q9	-	RP114K171D	LVR-IC	LDO, 1.7V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
Q997	-	TS4997IQT	Lin-IC	AF PA, BTL, 2.7..5.5V, 2x1W(5V/8Ω), separate shutdown	QFN-16	38	-	9a	Ste
QA	-	R1118K291D	LVR-IC	2.9V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
QA	-	RP152L001A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QB	-	R1118K301D	LVR-IC	3V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
QB	-	RP152L002A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QC	-	R1118K311D	LVR-IC	3.1V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
QC	-	RP152L003A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QD	-	R1118K321D	LVR-IC	3.2V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
QD	-	RP152L004A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QE	-	R1118K331D	LVR-IC	3.3V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
QE	-	RP152L005A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QF	-	R1118K341D	LVR-IC	3.4V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
QF	-	RP152L006A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QFR3	-	MIC5314-1.5/1.1YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.1V±1%, 300mA, +CE, Reset	MLF-12	37	-	9x	Mcr
QFR4	-	MIC5314-1.5/1.2YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.2V±1%, 300mA, +CE, Reset	MLF-12	37	-	9x	Mcr
QFR5	-	MIC5314-1.5/1.3YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.3V±1%, 300mA, +CE, Reset	MLF-12	37	-	9x	Mcr
QFR6	-	MIC5314-1.5/1.4YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.4V±1%, 300mA, +CE, Reset	MLF-12	37	-	9x	Mcr
QFRC	-	MIC5314-1.5/1.0YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.0V±1%, 300mA, +CE, Reset	MLF-12	37	-	9x	Mcr
QFRF	-	MIC5314-1.5/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.5V±1%, 300mA, +CE, Reset	MLF-12	37	-	9x	Mcr
QG	-	R1118K351D	LVR-IC	3.5V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
QG	-	RP152L007A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QGR4	-	MIC5314-1.8/1.2YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.2V±1%, 300mA, +CE, Reset	MLF-12	37	-	9x	Mcr
QGRG	-	MIC5314-1.8/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.8V±1%, 300mA, +CE, Reset	MLF-12	37	-	9x	Mcr
QH	-	LD6805K/28H	LVR-IC	LDO, 2.8V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
QH	-	R1118K361D	LVR-IC	3.6V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
QH	-	RP152L008A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QJ	-	R1118K371D	LVR-IC	3.7V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
QJ	-	RP152L009A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QK	-	R1118K381D	LVR-IC	3.8V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
QK	-	RP152L010A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
ql	-	BU13UA3WNVX	LVR-IC	LDO, 1.3V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
QL	-	R1118K391D	LVR-IC	3.9V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
QL	-	RP152L011A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QM	-	R1118K401D	LVR-IC	4V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
QM	-	RP152L012A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QN	-	R1118K411D	LVR-IC	4.1V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
QN	-	RP152L013A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QP	-	LD6805K/28P	LVR-IC	LDO, 2.8V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
QP	-	R1118K421D	LVR-IC	4.2V±1%, 150mA, +CE, CL	DFN1612-4B	45vm	VR4	9a	Ric
QP	-	RP152L014A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QQ	-	RP152L015A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QR	-	RP152L016A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QS	-	RP152L017A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QT	-	RP152L018A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QTA	-	NCP2823AFC	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 1.5W(5V/8Ω), shutdown	BGA-9	39	AFP45	9o	Ons
QU	-	RP152L019A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QV	-	RP152L020A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QW	-	RP152L021A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QX	-	RP152L022A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QY	-	RP152L023A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
QZ	-	RP152L024A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
R	-	UNRL114	Si-pnp-Digi	Sw, 50V, 100mA, 150mW, 80MHz, R1/R2=10k/47k	ML4	31tm	-	2b	Pan
R	-	UNRL214	Si-npn-Digi	Sw, 50V, 100mA, 150mW, 150MHz, R1/R2=10k/47k	ML4	31tm	-	2b	Pan
R0	-	ISL9016IRUNWZ	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.2V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
R0	-	R3117K073C	Vdet-IC	0.7V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
R0	-	RP114K181D	LVR-IC	LDO, 1.8V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
R0	-	XC6GN5002HR	Vdet-IC	5.0V±2%, +Reset ODO	USP-3	17vdc	VD1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R001	-	R5325K001A	LVR-IC	LDO, Dual out, V1=2V±1%, V2=2V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R002	-	R5325K002A	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=2.8V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R003	-	R5325K003A	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=3V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R004	-	R5325K004A	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=3V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R005	-	R5325K005A	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=2.5V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R006	-	R5325K006A	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=3.3V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R007	-	R5325K007A	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=2.8V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R008	-	R5325K008A	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=1.2V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R009	-	R5325K009A	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=1.6V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R01	-	XC6421AB01ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.20V±20mV/1.20V±20mV, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R010	-	R5325K010A	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=2.8V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R011	-	R5325K011A	LVR-IC	LDO, Dual out, V1=3V±1%, V2=3V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R012	-	R5325K012A	LVR-IC	LDO, Dual out, V1=3.1V±1%, V2=3.1V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R013	-	R5325K013A	LVR-IC	LDO, Dual out, V1=2.7V±1%, V2=1.8V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R014	-	R5325K014A	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=2.6V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R015	-	R5325K015A	LVR-IC	LDO, Dual out, V1=3.3V±1%, V2=3.3V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R016	-	R5325K016A	LVR-IC	LDO, Dual out, V1=2.85V±1%, V2=2.85V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R017	-	R5325K017A	LVR-IC	LDO, Dual out, V1=2.9V±1%, V2=2.9V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R018	-	R5325K018A	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=2.6V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R019	-	R5325K019A	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=2.9V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R02	-	XC6421AB02ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.20V±20mV/1.50V±20mV, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R020	-	R5325K020A	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=1.8V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R021	-	R5325K021A	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=1.2V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R022	-	R5325K022A	LVR-IC	LDO, Dual out, V1=2.7V±1%, V2=2.85V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R023	-	R5325K023A	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=2.8V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R024	-	R5325K024A	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=3V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R025	-	R5325K025A	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=2.9V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R026	-	R5325K026A	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=2.7V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R027	-	R5325K027A	LVR-IC	LDO, Dual out, V1=2.9V±1%, V2=1.8V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R028	-	R5325K028A	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=1.8V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R029	-	R5325K029A	LVR-IC	LDO, Dual out, V1=3.3V±1%, V2=3.3V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R03	-	XC61GN5002HR	Vdet-IC	5.0V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
R03	-	XC6421AB03ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.20V±20mV/2.50V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R030	-	R5325K030A	LVR-IC	LDO, Dual out, V1=3.45±1%V, V2=2.3V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R031	-	R5325K031A	LVR-IC	LDO, Dual out, V1=1.3V±1%, V2=1.8V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R032	-	R5325K032A	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=1.8V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R033	-	R5325K033A	LVR-IC	LDO, Dual out, V1=3.1V±1%, V2=3.0V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R034	-	R5325K034A	LVR-IC	LDO, Dual out, V1=2.95V±1%, V2=2.75V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R035	-	R5325K035A	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=2.85V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
R04	-	XC6421AB04ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.20V±20mV/2.85V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R05	-	XC6421AB05ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.20V±20mV/3.00V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R06	-	XC6421AB06ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.20V±20mV/3.30V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R07	-	XC6421AB07ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.50V±20mV/1.50V±20mV, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R08	-	XC6421AB08ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.50V±20mV/1.80V±20mV, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R09	-	XC6421AB09ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.50V±20mV/2.50V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R0A	-	XC6108N50AGR	Vdet-IC	5.0V±2%, Hysteresis, -Reset ODO	USP-4	45ro	VD14	9b	Tor
R0A	-	XC6118C40AGR-G	Vdet-IC	4.0V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
R0B	-	XC6108N50BGR	Vdet-IC	5.0V±2%, -Reset ODO	USP-4	45ro	VD14	9b	Tor
R0B	-	XC6118C40BGR-G	Vdet-IC	4.0V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
R0C	-	XC6108N50CGR	Vdet-IC	5.0V±2%, Hysteresis, -Reset ODO	USP-4	45rn	VD14	9b	Tor
R0C	-	XC6118C40CGR-G	Vdet-IC	4.0V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
R0D	-	XC6108N50DGR	Vdet-IC	5.0V±2%, -Reset ODO	USP-4	45rn	VD14	9b	Tor
R0D	-	XC6118C40DGR-G	Vdet-IC	4.0V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
R1	-	DW84C4V7NND03	Z-diode	4.7V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
R1	-	ISL9016IRUNCZ	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
R1	-	R3117K083C	Vdet-IC	0.8V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
R1	-	RP114K191D	LVR-IC	LDO, 1.9V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
R10	-	XC6421AB10ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.50V±20mV/2.85V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R11	-	XC6421AB11ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.50V±20mV/3.00V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R12	-	XC6421AB12ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.50V±20mV/3.30V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R13	-	XC61GN5102HR	Vdet-IC	5.1V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
R13	-	XC6421AB13ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.80V±20mV/1.80V±20mV, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R14	-	XC6421AB14ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.80V±20mV/2.50V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R15	-	XC6421AB15ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V±1%/2.85V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R16	-	XC6421AB16ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.80V±20mV/2.85V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R17	-	XC6421AB17ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.80V±20mV/3.00V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R18	-	XC6421AB18ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.00V±1%/1.80V±20mV, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R19	-	XC6421AB19ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.80V±20mV/3.30V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R1A	-	XC6118C41AGR-G	Vdet-IC	4.1V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
R1B	-	XC6118C41BGR-G	Vdet-IC	4.1V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R1C	-	XC6118C41CGR-G	Vdet-IC	4.1V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
R1D	-	XC6118C41DGR-G	Vdet-IC	4.1V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
R2	-	DW84C5V1NND03	Z-diode	5.1V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
R2	-	ISL9016IRUGCZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.7V/1.8V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
R2	-	R3117K093C	Vdet-IC	0.9V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
R2	-	RP114K201D	LVR-IC	LDO, 2.0V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
R20	-	XC6421AB20ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=2.50V±1%/2.50V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R21	-	XC6421AB21ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=2.50V±1%/2.80V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R22	-	XC6421AB22ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=2.50V±1%/2.85V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R23	-	XC61GN5202HR	Vdet-IC	5.2V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
R23	-	XC6421AB23ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.30V±1%/1.50V±20mV, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R24	-	XC6421AB24ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=2.50V±1%/3.00V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R25	-	XC6421AB25ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=2.50V±1%/3.30V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R26	-	XC6421AB26ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V±1%/3.00V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R27	-	XC6421AB27ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V±1%/3.30V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R28	-	XC6421AB28ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.00V±1%/3.00V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R29	-	XC6421AB29ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.20V±20mV/1.80V±20mV, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R2A	-	XC6118C42AGR-G	Vdet-IC	4.2V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
R2B	-	XC6118C42BGR-G	Vdet-IC	4.2V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
R2C	-	XC6118C42CGR-G	Vdet-IC	4.2V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
R2D	-	XC6118C42DGR-G	Vdet-IC	4.2V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
R3	-	DW84C5V6NND03	Z-diode	5.6V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
R3	-	ISL9016IRUFWZ	LVR-IC	LDO, Dual out, Vo1/Vo2=2.5V/1.2V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
R3	-	R3117K103C	Vdet-IC	1.0V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
R3	-	RP114K211D	LVR-IC	LDO, 2.1V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
R30	-	XC6421AB30ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.30V±20mV/2.80V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R31	-	XC6421AB31ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.50V±20mV/2.80V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R32	-	XC6421AB32ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.80V±20mV/2.80V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R33	-	XC61GN5302HR	Vdet-IC	5.3V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
R33	-	XC6421AB33ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=2.80V±1%/2.80V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R34	-	XC6421AB34ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=2.80V±1%/3.00V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R35	-	XC6421AB35ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=2.80V±1%/3.30V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R36	-	XC6421AB36ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.20V±20mV/3.60V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R37	-	XC6421AB37ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.60V±1%/1.20V±20mV, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R38	-	XC6421AB38ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.20V±20mV/2.80V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R39	-	XC6421AB39ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.30V±1%/2.00V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R3A	-	XC6118C43AGR-G	Vdet-IC	4.3V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
R3B	-	XC6118C43BGR-G	Vdet-IC	4.3V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
R3C	-	XC6118C43CGR-G	Vdet-IC	4.3V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
R3D	-	XC6118C43DGR-G	Vdet-IC	4.3V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
R4	-	DW84C6V2NND03	Z-diode	6.2V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
R4	-	ISL9016IRUCBZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.5V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
R4	-	R3117K113C	Vdet-IC	1.1V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
R4	-	RP114K221D	LVR-IC	LDO, 2.2V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
R40	-	XC6421AB40ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.00V±1%/3.30V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R41	-	XC6421AB41ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.30V±1%/3.30V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R42	-	XC6421AB42ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.30V±20mV/1.50V±20mV, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R43	-	XC61GN5402HR	Vdet-IC	5.4V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
R43	-	XC6421AB43ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=2.60V±1%/2.80V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R44	-	XC6421AB44ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.10V±1%/3.30V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R45	-	XC6421AB45ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.50V±20mV/2.60V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R46	-	XC6421AB46ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=2.60V±1%/3.30V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R47	-	XC6421AB47ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.40V±1%/3.40V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R48	-	XC6421AB48ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V±1%/2.60V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R49	-	XC6421AB49ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.30V±1%/1.80V±20mV, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R4A	-	XC6118C44AGR-G	Vdet-IC	4.4V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
R4B	-	XC6118C44BGR-G	Vdet-IC	4.4V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
R4C	-	XC6118C44CGR-G	Vdet-IC	4.4V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
R4D	-	XC6118C44DGR-G	Vdet-IC	4.4V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
R5	-	DW84C6V8NND03	Z-diode	6.8V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
R5	-	ISL9016IRUCWZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.2V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
R5	-	R3117K123C	Vdet-IC	1.2V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
R5	-	RP114K231D	LVR-IC	LDO, 2.3V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
R50	-	XC6421AB50ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.80V±20mV/1.20V±20mV, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R51	-	XC6421AB51ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.10V±1%/3.10V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R52	-	XC6421AB52ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.50V±20mV/3.10V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R53	-	XC61GN5502HR	Vdet-IC	5.5V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
R53	-	XC6421AB53ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.30V±1%/2.80V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R54	-	XC6421AB54ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.00V±1%/2.80V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R55	-	XC6421AB55ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.30V±1%/3.00V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
R56	-	XC6421AB56ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.60V±1%/3.60V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R57	-	XC6421AB57ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.30V±1%/3.10V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R58	-	XC6421AB58ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.10V±1%/3.00V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R59	-	XC6421AB59ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.10V±1%/2.90V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R5A	-	XC6118C45AGR-G	Vdet-IC	4.5V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
R5B	-	XC6118C45BGR-G	Vdet-IC	4.5V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
R5C	-	XC6118C45CGR-G	Vdet-IC	4.5V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
R5D	-	XC6118C45DGR-G	Vdet-IC	4.5V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
R6	-	DW84C7V5NND03	Z-diode	7.5V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
R6	-	ISL9016IRUBBZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.5V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
R6	-	R3117K133C	Vdet-IC	1.3V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
R6	-	RP114K241D	LVR-IC	LDO, 2.4V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
R60	-	XC6421AB60ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.10V±1%/2.50V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R61	-	XC6421AB61ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.00V±1%/2.90V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R62	-	XC6421AB62ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=3.00V±1%/2.50V±1%, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R63	-	XC61GN5602HR	Vdet-IC	5.6V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
R63	-	XC6421AB63ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.80V±20mV/1.90V±20mV, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R64	-	XC6421AB64ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.80V±20mV/1.85V±20mV, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R65	-	XC6421AB65ER-G	LVR-IC	LDO, Dual out, Vo1/Vo2=1.70V±20mV/1.70V±20mV, 300mA, +CE	USP-6C	49zw	VR19	9a	Tor
R6A	-	XC6118C46AGR-G	Vdet-IC	4.6V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
R6B	-	XC6118C46BGR-G	Vdet-IC	4.6V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
R6C	-	XC6118C46CGR-G	Vdet-IC	4.6V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
R6D	-	XC6118C46DGR-G	Vdet-IC	4.6V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
R7	-	DW84C8V2NND03	Z-diode	8.2V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
R7	-	ISL9016IRUBWZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.5V/1.2V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
R7	-	R3117K143C	Vdet-IC	1.4V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
R7	-	RP114K251D	LVR-IC	LDO, 2.5V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
R73	-	XC61GN5702HR	Vdet-IC	5.7V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
R7A	-	XC6118C47AGR-G	Vdet-IC	4.7V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
R7B	-	XC6118C47BGR-G	Vdet-IC	4.7V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
R7C	-	XC6118C47CGR-G	Vdet-IC	4.7V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
R7D	-	XC6118C47DGR-G	Vdet-IC	4.7V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
R8	-	DW84C9V1NND03	Z-diode	9.1V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
R8	-	R3117K153C	Vdet-IC	1.5V±15mV, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
R8	-	RP114K261D	LVR-IC	LDO, 2.6V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
R83	-	XC61GN5802HR	Vdet-IC	5.8V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
R8A	-	XC6118C48AGR-G	Vdet-IC	4.8V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
R8B	-	XC6118C48BGR-G	Vdet-IC	4.8V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
R8C	-	XC6118C48CGR-G	Vdet-IC	4.8V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
R8D	-	XC6118C48DGR-G	Vdet-IC	4.8V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
R9	-	DW84C10NND03	Z-diode	10V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
R9	-	R3117K163C	Vdet-IC	1.6V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
R9	-	RP114K271D	LVR-IC	LDO, 2.7V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
R93	-	XC61GN5902HR	Vdet-IC	5.9V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
R9A	-	XC6118C49AGR-G	Vdet-IC	4.9V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
R9B	-	XC6118C49BGR-G	Vdet-IC	4.9V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
R9C	-	XC6118C49CGR-G	Vdet-IC	4.9V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
R9D	-	XC6118C49DGR-G	Vdet-IC	4.9V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
RA	-	EUA2010H	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/4Ω), shutdown	BGA-9	39	AFP45	9a	Eut
RA	-	RP130K121A	LVR-IC	LDO, LN, -CE, 1.2V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RA	-	RP152L025A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RA096	-	XC9227A096D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 0.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA09C	-	XC9227A09CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 0.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA0M6	-	XC9227A0M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 0.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA0MC	-	XC9227A0MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 0.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA106	-	XC9227A106D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA10C	-	XC9227A10CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA116	-	XC9227A116D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA11C	-	XC9227A11CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA126	-	XC9227A126D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA12C	-	XC9227A12CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA136	-	XC9227A136D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA13C	-	XC9227A13CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA146	-	XC9227A146D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA14C	-	XC9227A14CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA156	-	XC9227A156D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA15C	-	XC9227A15CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA166	-	XC9227A166D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA16C	-	XC9227A16CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA176	-	XC9227A176D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RA17C	-	XC9227A17CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA186	-	XC9227A186D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA18C	-	XC9227A18CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA196	-	XC9227A196D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA19C	-	XC9227A19CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1A6	-	XC9227A1A6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1AC	-	XC9227A1ACD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1B6	-	XC9227A1B6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1BC	-	XC9227A1BCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1C6	-	XC9227A1C6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1CC	-	XC9227A1CCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1D6	-	XC9227A1D6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1DC	-	XC9227A1DCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1E6	-	XC9227A1E6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1EC	-	XC9227A1ECD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1F6	-	XC9227A1F6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1FC	-	XC9227A1FCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1H6	-	XC9227A1H6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1HC	-	XC9227A1HCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1K6	-	XC9227A1K6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1KC	-	XC9227A1KCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1L6	-	XC9227A1L6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1LC	-	XC9227A1LCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1M6	-	XC9227A1M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA1MC	-	XC9227A1MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA206	-	XC9227A206D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA20C	-	XC9227A20CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA216	-	XC6123A216ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA216	-	XC9227A216D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA217	-	XC6123A217ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA218	-	XC6123A218ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA219	-	XC6123A219ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA21C	-	XC9227A21CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA220	-	XC6123A220ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA221	-	XC6123A221ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA222	-	XC6123A222ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA223	-	XC6123A223ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA224	-	XC6123A224ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA225	-	XC6123A225ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA226	-	XC6123A226ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA226	-	XC9227A226D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA227	-	XC6123A227ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA228	-	XC6123A228ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA229	-	XC6123A229ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA22C	-	XC9227A22CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA230	-	XC6123A230ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA231	-	XC6123A231ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA232	-	XC6123A232ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA233	-	XC6123A233ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA234	-	XC6123A234ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA235	-	XC6123A235ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA236	-	XC6123A236ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA236	-	XC9227A236D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA237	-	XC6123A237ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA238	-	XC6123A238ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA239	-	XC6123A239ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA23C	-	XC9227A23CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA240	-	XC6123A240ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA241	-	XC6123A241ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA242	-	XC6123A242ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA243	-	XC6123A243ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA244	-	XC6123A244ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA245	-	XC6123A245ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA246	-	XC6123A246ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA246	-	XC9227A246D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA247	-	XC6123A247ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA248	-	XC6123A248ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA249	-	XC6123A249ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA24C	-	XC9227A24CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA250	-	XC6123A250ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RA256	-	XC9227A256D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA25C	-	XC9227A25CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA266	-	XC9227A266D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA26C	-	XC9227A26CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA276	-	XC9227A276D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA27C	-	XC9227A27CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA286	-	XC9227A286D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA28C	-	XC9227A28CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA296	-	XC9227A296D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA29C	-	XC9227A29CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2A6	-	XC9227A2A6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2AC	-	XC9227A2ACD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2B6	-	XC9227A2B6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2BC	-	XC9227A2BCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2C6	-	XC9227A2C6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2CC	-	XC9227A2CCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2D6	-	XC9227A2D6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2DC	-	XC9227A2DCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2E6	-	XC9227A2E6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2EC	-	XC9227A2ECD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2F6	-	XC9227A2F6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2FC	-	XC9227A2FCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2H6	-	XC9227A2H6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2HC	-	XC9227A2HCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2K6	-	XC9227A2K6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2KC	-	XC9227A2KCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2L6	-	XC9227A2L6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2LC	-	XC9227A2LCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2M6	-	XC9227A2M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA2MC	-	XC9227A2MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA306	-	XC9227A306D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA30C	-	XC9227A30CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA316	-	XC6123A316ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA316	-	XC9227A316D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA317	-	XC6123A317ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA318	-	XC6123A318ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA319	-	XC6123A319ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA31C	-	XC9227A31CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA320	-	XC6123A320ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA321	-	XC6123A321ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA322	-	XC6123A322ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA323	-	XC6123A323ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA324	-	XC6123A324ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA325	-	XC6123A325ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA326	-	XC6123A326ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA326	-	XC9227A326D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA327	-	XC6123A327ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA328	-	XC6123A328ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA329	-	XC6123A329ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA32C	-	XC9227A32CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA330	-	XC6123A330ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA331	-	XC6123A331ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA332	-	XC6123A332ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA333	-	XC6123A333ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA334	-	XC6123A334ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA335	-	XC6123A335ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA336	-	XC6123A336ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA336	-	XC9227A336D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA337	-	XC6123A337ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA338	-	XC6123A338ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA339	-	XC6123A339ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA33C	-	XC9227A33CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA340	-	XC6123A340ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA341	-	XC6123A341ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA342	-	XC6123A342ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA343	-	XC6123A343ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA344	-	XC6123A344ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA345	-	XC6123A345ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA346	-	XC6123A346ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA346	-	XC9227A346D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RA347	-	XC6123A347ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA348	-	XC6123A348ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA349	-	XC6123A349ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA34C	-	XC9227A34CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA350	-	XC6123A350ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA356	-	XC9227A356D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA35C	-	XC9227A35CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA366	-	XC9227A366D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA36C	-	XC9227A36CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA376	-	XC9227A376D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA37C	-	XC9227A37CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA386	-	XC9227A386D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA38C	-	XC9227A38CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA396	-	XC9227A396D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA39C	-	XC9227A39CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3A6	-	XC9227A3A6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3AC	-	XC9227A3ACD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3B6	-	XC9227A3B6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3BC	-	XC9227A3BCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3C6	-	XC9227A3C6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3CC	-	XC9227A3CCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3D6	-	XC9227A3D6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3DC	-	XC9227A3DCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3E6	-	XC9227A3E6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3EC	-	XC9227A3ECD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3F6	-	XC9227A3F6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3FC	-	XC9227A3FCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3H6	-	XC9227A3H6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3HC	-	XC9227A3HCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3K6	-	XC9227A3K6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3KC	-	XC9227A3KCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3L6	-	XC9227A3L6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3LC	-	XC9227A3LCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3M6	-	XC9227A3M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA3MC	-	XC9227A3MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA406	-	XC9227A406D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 4.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA40C	-	XC9227A40CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 4.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RA416	-	XC6123A416ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA417	-	XC6123A417ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA418	-	XC6123A418ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA419	-	XC6123A419ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA420	-	XC6123A420ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA421	-	XC6123A421ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA422	-	XC6123A422ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA423	-	XC6123A423ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA424	-	XC6123A424ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA425	-	XC6123A425ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA426	-	XC6123A426ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA427	-	XC6123A427ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA428	-	XC6123A428ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA429	-	XC6123A429ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA430	-	XC6123A430ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA431	-	XC6123A431ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA432	-	XC6123A432ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA433	-	XC6123A433ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA434	-	XC6123A434ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA435	-	XC6123A435ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA436	-	XC6123A436ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA437	-	XC6123A437ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA438	-	XC6123A438ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA439	-	XC6123A439ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA440	-	XC6123A440ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA441	-	XC6123A441ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA442	-	XC6123A442ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA443	-	XC6123A443ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA444	-	XC6123A444ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA445	-	XC6123A445ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA446	-	XC6123A446ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA447	-	XC6123A447ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA448	-	XC6123A448ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RA449	-	XC6123A449ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA450	-	XC6123A450ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA516	-	XC6123A516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA517	-	XC6123A517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA518	-	XC6123A518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA519	-	XC6123A519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA520	-	XC6123A520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA521	-	XC6123A521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA522	-	XC6123A522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA523	-	XC6123A523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA524	-	XC6123A524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA525	-	XC6123A525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA526	-	XC6123A526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA527	-	XC6123A527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA528	-	XC6123A528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA529	-	XC6123A529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA530	-	XC6123A530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA531	-	XC6123A531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA532	-	XC6123A532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA533	-	XC6123A533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA534	-	XC6123A534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA535	-	XC6123A535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA536	-	XC6123A536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA537	-	XC6123A537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA538	-	XC6123A538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA539	-	XC6123A539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA540	-	XC6123A540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA541	-	XC6123A541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA542	-	XC6123A542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA543	-	XC6123A543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA544	-	XC6123A544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA545	-	XC6123A545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA546	-	XC6123A546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA547	-	XC6123A547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA548	-	XC6123A548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA549	-	XC6123A549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA550	-	XC6123A550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA616	-	XC6123A616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA617	-	XC6123A617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA618	-	XC6123A618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA619	-	XC6123A619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA620	-	XC6123A620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA621	-	XC6123A621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA622	-	XC6123A622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA623	-	XC6123A623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA624	-	XC6123A624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA625	-	XC6123A625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA626	-	XC6123A626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA627	-	XC6123A627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA628	-	XC6123A628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA629	-	XC6123A629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA630	-	XC6123A630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA631	-	XC6123A631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA632	-	XC6123A632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA633	-	XC6123A633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA634	-	XC6123A634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA635	-	XC6123A635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA636	-	XC6123A636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA637	-	XC6123A637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA638	-	XC6123A638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA639	-	XC6123A639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA640	-	XC6123A640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA641	-	XC6123A641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA642	-	XC6123A642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA643	-	XC6123A643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA644	-	XC6123A644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA645	-	XC6123A645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA646	-	XC6123A646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA647	-	XC6123A647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA648	-	XC6123A648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RA649	-	XC6123A649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA650	-	XC6123A650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA716	-	XC6123A716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA717	-	XC6123A717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA718	-	XC6123A718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA719	-	XC6123A719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA720	-	XC6123A720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA721	-	XC6123A721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA722	-	XC6123A722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA723	-	XC6123A723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA724	-	XC6123A724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA725	-	XC6123A725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA726	-	XC6123A726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA727	-	XC6123A727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA728	-	XC6123A728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA729	-	XC6123A729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA730	-	XC6123A730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA731	-	XC6123A731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA732	-	XC6123A732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA733	-	XC6123A733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA734	-	XC6123A734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA735	-	XC6123A735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA736	-	XC6123A736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA737	-	XC6123A737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA738	-	XC6123A738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA739	-	XC6123A739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA740	-	XC6123A740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA741	-	XC6123A741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA742	-	XC6123A742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA743	-	XC6123A743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA744	-	XC6123A744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA745	-	XC6123A745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA746	-	XC6123A746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA747	-	XC6123A747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA748	-	XC6123A748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA749	-	XC6123A749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RA750	-	XC6123A750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
RB	-	DW84C2V4NND03	Z-diode	2.4V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
RB	-	RP130K131A	LVR-IC	LDO, LN, -CE, 1.3V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RB	-	RP152L026A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RB096	-	XC9227B096D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 0.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB09C	-	XC9227B09CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 0.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB0M6	-	XC9227B0M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 0.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB0MC	-	XC9227B0MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 0.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB106	-	XC9227B106D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB10C	-	XC9227B10CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB116	-	XC9227B116D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB11C	-	XC9227B11CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB126	-	XC9227B126D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB12C	-	XC9227B12CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB136	-	XC9227B136D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB13C	-	XC9227B13CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB146	-	XC9227B146D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB14C	-	XC9227B14CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB156	-	XC9227B156D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB15C	-	XC9227B15CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB166	-	XC9227B166D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB16C	-	XC9227B16CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB176	-	XC9227B176D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB17C	-	XC9227B17CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB186	-	XC9227B186D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB18C	-	XC9227B18CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB196	-	XC9227B196D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB19C	-	XC9227B19CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1A6	-	XC9227B1A6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1AC	-	XC9227B1ACD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1B6	-	XC9227B1B6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1BC	-	XC9227B1BCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1C6	-	XC9227B1C6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1CC	-	XC9227B1CCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RB1D6	-	XC9227B1D6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1DC	-	XC9227B1DCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1E6	-	XC9227B1E6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1EC	-	XC9227B1ECD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1F6	-	XC9227B1F6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1FC	-	XC9227B1FCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1H6	-	XC9227B1H6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1HC	-	XC9227B1HCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1K6	-	XC9227B1K6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1KC	-	XC9227B1KCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1L6	-	XC9227B1L6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1LC	-	XC9227B1LCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1M6	-	XC9227B1M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB1MC	-	XC9227B1MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB206	-	XC9227B206D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB20C	-	XC9227B20CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB216	-	XC9227B216D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB21C	-	XC9227B21CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB226	-	XC9227B226D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB22C	-	XC9227B22CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB236	-	XC9227B236D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB23C	-	XC9227B23CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB246	-	XC9227B246D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB24C	-	XC9227B24CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB256	-	XC9227B256D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB25C	-	XC9227B25CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB266	-	XC9227B266D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB26C	-	XC9227B26CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB276	-	XC9227B276D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB27C	-	XC9227B27CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB286	-	XC9227B286D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB28C	-	XC9227B28CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB296	-	XC9227B296D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB29C	-	XC9227B29CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2A6	-	XC9227B2A6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2AC	-	XC9227B2ACD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2B6	-	XC9227B2B6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2BC	-	XC9227B2BCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2C6	-	XC9227B2C6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2CC	-	XC9227B2CCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2D6	-	XC9227B2D6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2DC	-	XC9227B2DCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2E6	-	XC9227B2E6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2EC	-	XC9227B2ECD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2F6	-	XC9227B2F6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2FC	-	XC9227B2FCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2H6	-	XC9227B2H6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2HC	-	XC9227B2HCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2K6	-	XC9227B2K6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2KC	-	XC9227B2KCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2L6	-	XC9227B2L6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2LC	-	XC9227B2LCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2M6	-	XC9227B2M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB2MC	-	XC9227B2MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB306	-	XC9227B306D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB30C	-	XC9227B30CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB316	-	XC9227B316D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB31C	-	XC9227B31CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB326	-	XC9227B326D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB32C	-	XC9227B32CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB336	-	XC9227B336D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB33C	-	XC9227B33CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB346	-	XC9227B346D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB34C	-	XC9227B34CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB356	-	XC9227B356D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB35C	-	XC9227B35CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB366	-	XC9227B366D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB36C	-	XC9227B36CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB376	-	XC9227B376D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB37C	-	XC9227B37CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RB386	-	XC9227B386D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB38C	-	XC9227B38CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB396	-	XC9227B396D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB39C	-	XC9227B39CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3A6	-	XC9227B3A6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3AC	-	XC9227B3ACD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3B6	-	XC9227B3B6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3BC	-	XC9227B3BCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3C6	-	XC9227B3C6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3CC	-	XC9227B3CCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3D6	-	XC9227B3D6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3DC	-	XC9227B3DCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3E6	-	XC9227B3E6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3EC	-	XC9227B3ECD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3F6	-	XC9227B3F6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3FC	-	XC9227B3FCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3H6	-	XC9227B3H6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3HC	-	XC9227B3HCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3K6	-	XC9227B3K6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3KC	-	XC9227B3KCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3L6	-	XC9227B3L6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3LC	-	XC9227B3LCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3M6	-	XC9227B3M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB3MC	-	XC9227B3MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB406	-	XC9227B406D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 4.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RB40C	-	XC9227B40CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 4.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RC	-	DW84C2V7NND03	Z-diode	2.7V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
RC	-	RP130K141A	LVR-IC	LDO, LN, -CE, 1.4V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RC	-	RP152L027A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RC096	-	XC9227C096D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 0.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC09C	-	XC9227C09CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 0.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC0M6	-	XC9227C0M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 0.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC0MC	-	XC9227C0MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 0.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC106	-	XC9227C106D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC10C	-	XC9227C10CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC116	-	XC9227C116D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC11C	-	XC9227C11CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC126	-	XC9227C126D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC12C	-	XC9227C12CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC136	-	XC9227C136D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC13C	-	XC9227C13CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC146	-	XC9227C146D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC14C	-	XC9227C14CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC156	-	XC9227C156D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC15C	-	XC9227C15CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC166	-	XC9227C166D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC16C	-	XC9227C16CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC176	-	XC9227C176D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC17C	-	XC9227C17CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC186	-	XC9227C186D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC18C	-	XC9227C18CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC196	-	XC9227C196D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC19C	-	XC9227C19CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1A6	-	XC9227C1A6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1AC	-	XC9227C1ACD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1B6	-	XC9227C1B6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1BC	-	XC9227C1BCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1C6	-	XC9227C1C6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1CC	-	XC9227C1CCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1D6	-	XC9227C1D6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1DC	-	XC9227C1DCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1E6	-	XC9227C1E6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1EC	-	XC9227C1ECD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1F6	-	XC9227C1F6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1FC	-	XC9227C1FCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1H6	-	XC9227C1H6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1HC	-	XC9227C1HCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1K6	-	XC9227C1K6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1KC	-	XC9227C1KCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1L6	-	XC9227C1L6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RC1LC	-	XC9227C1LCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1M6	-	XC9227C1M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC1MC	-	XC9227C1MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC206	-	XC9227C206D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC20C	-	XC9227C20CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC216	-	XC6123C216ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC216	-	XC9227C216D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC217	-	XC6123C217ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC218	-	XC6123C218ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC219	-	XC6123C219ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC21C	-	XC9227C21CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC220	-	XC6123C220ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC221	-	XC6123C221ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC222	-	XC6123C222ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC223	-	XC6123C223ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC224	-	XC6123C224ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC225	-	XC6123C225ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC226	-	XC6123C226ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC226	-	XC9227C226D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC227	-	XC6123C227ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC228	-	XC6123C228ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC229	-	XC6123C229ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC22C	-	XC9227C22CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC230	-	XC6123C230ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC231	-	XC6123C231ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC232	-	XC6123C232ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC233	-	XC6123C233ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC234	-	XC6123C234ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC235	-	XC6123C235ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC236	-	XC6123C236ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC236	-	XC9227C236D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC237	-	XC6123C237ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC238	-	XC6123C238ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC239	-	XC6123C239ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC23C	-	XC9227C23CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC240	-	XC6123C240ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC241	-	XC6123C241ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC242	-	XC6123C242ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC243	-	XC6123C243ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC244	-	XC6123C244ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC245	-	XC6123C245ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC246	-	XC6123C246ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC246	-	XC9227C246D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC247	-	XC6123C247ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC248	-	XC6123C248ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC249	-	XC6123C249ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC24C	-	XC9227C24CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC250	-	XC6123C250ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC256	-	XC9227C256D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC25C	-	XC9227C25CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC266	-	XC9227C266D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC26C	-	XC9227C26CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC276	-	XC9227C276D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC27C	-	XC9227C27CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC286	-	XC9227C286D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC28C	-	XC9227C28CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC296	-	XC9227C296D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC29C	-	XC9227C29CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2A6	-	XC9227C2A6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2AC	-	XC9227C2ACD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2B6	-	XC9227C2B6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2BC	-	XC9227C2BCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2C6	-	XC9227C2C6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2CC	-	XC9227C2CCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2D6	-	XC9227C2D6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2DC	-	XC9227C2DCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2E6	-	XC9227C2E6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2EC	-	XC9227C2ECD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2F6	-	XC9227C2F6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2FC	-	XC9227C2FCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RC2H6	-	XC9227C2H6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2HC	-	XC9227C2HCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2K6	-	XC9227C2K6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2KC	-	XC9227C2KCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2L6	-	XC9227C2L6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2LC	-	XC9227C2LCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2M6	-	XC9227C2M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC2MC	-	XC9227C2MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC306	-	XC9227C306D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC30C	-	XC9227C30CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC316	-	XC6123C316ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC316	-	XC9227C316D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC317	-	XC6123C317ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC318	-	XC6123C318ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC319	-	XC6123C319ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC31C	-	XC9227C31CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC320	-	XC6123C320ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC321	-	XC6123C321ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC322	-	XC6123C322ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC323	-	XC6123C323ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC324	-	XC6123C324ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC325	-	XC6123C325ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC326	-	XC6123C326ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC326	-	XC9227C326D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC327	-	XC6123C327ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC328	-	XC6123C328ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC329	-	XC6123C329ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC32C	-	XC9227C32CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC330	-	XC6123C330ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC331	-	XC6123C331ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC332	-	XC6123C332ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC333	-	XC6123C333ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC334	-	XC6123C334ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC335	-	XC6123C335ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC336	-	XC6123C336ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC336	-	XC9227C336D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC337	-	XC6123C337ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC338	-	XC6123C338ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC339	-	XC6123C339ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC33C	-	XC9227C33CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC340	-	XC6123C340ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC341	-	XC6123C341ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC342	-	XC6123C342ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC343	-	XC6123C343ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC344	-	XC6123C344ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC345	-	XC6123C345ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC346	-	XC6123C346ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC346	-	XC9227C346D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC347	-	XC6123C347ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC348	-	XC6123C348ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC349	-	XC6123C349ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC34C	-	XC9227C34CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC350	-	XC6123C350ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC356	-	XC9227C356D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC35C	-	XC9227C35CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC366	-	XC9227C366D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC36C	-	XC9227C36CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC376	-	XC9227C376D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC37C	-	XC9227C37CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC386	-	XC9227C386D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC38C	-	XC9227C38CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC396	-	XC9227C396D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC39C	-	XC9227C39CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3A6	-	XC9227C3A6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3AC	-	XC9227C3ACD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3B6	-	XC9227C3B6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3BC	-	XC9227C3BCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3C6	-	XC9227C3C6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3CC	-	XC9227C3CCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3D6	-	XC9227C3D6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RC3DC	-	XC9227C3DCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3E6	-	XC9227C3E6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3EC	-	XC9227C3ECD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3F6	-	XC9227C3F6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3FC	-	XC9227C3FCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3H6	-	XC9227C3H6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3HC	-	XC9227C3HCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3K6	-	XC9227C3K6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3KC	-	XC9227C3KCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3L6	-	XC9227C3L6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3LC	-	XC9227C3LCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3M6	-	XC9227C3M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC3MC	-	XC9227C3MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC406	-	XC9227C406D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 4.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC40C	-	XC9227C40CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 4.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RC416	-	XC6123C416ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC417	-	XC6123C417ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC418	-	XC6123C418ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC419	-	XC6123C419ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC420	-	XC6123C420ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC421	-	XC6123C421ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC422	-	XC6123C422ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC423	-	XC6123C423ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC424	-	XC6123C424ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC425	-	XC6123C425ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC426	-	XC6123C426ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC427	-	XC6123C427ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC428	-	XC6123C428ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC429	-	XC6123C429ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC430	-	XC6123C430ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC431	-	XC6123C431ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC432	-	XC6123C432ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC433	-	XC6123C433ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC434	-	XC6123C434ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC435	-	XC6123C435ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC436	-	XC6123C436ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC437	-	XC6123C437ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC438	-	XC6123C438ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC439	-	XC6123C439ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC440	-	XC6123C440ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC441	-	XC6123C441ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC442	-	XC6123C442ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC443	-	XC6123C443ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC444	-	XC6123C444ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC445	-	XC6123C445ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC446	-	XC6123C446ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC447	-	XC6123C447ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC448	-	XC6123C448ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC449	-	XC6123C449ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC450	-	XC6123C450ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC516	-	XC6123C516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC517	-	XC6123C517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC518	-	XC6123C518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC519	-	XC6123C519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC520	-	XC6123C520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC521	-	XC6123C521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC522	-	XC6123C522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC523	-	XC6123C523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC524	-	XC6123C524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC525	-	XC6123C525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC526	-	XC6123C526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC527	-	XC6123C527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC528	-	XC6123C528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC529	-	XC6123C529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC530	-	XC6123C530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC531	-	XC6123C531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC532	-	XC6123C532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC533	-	XC6123C533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC534	-	XC6123C534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC535	-	XC6123C535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RC536	-	XC6123C536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC537	-	XC6123C537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC538	-	XC6123C538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC539	-	XC6123C539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC540	-	XC6123C540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC541	-	XC6123C541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC542	-	XC6123C542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC543	-	XC6123C543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC544	-	XC6123C544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC545	-	XC6123C545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC546	-	XC6123C546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC547	-	XC6123C547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC548	-	XC6123C548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC549	-	XC6123C549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC550	-	XC6123C550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC616	-	XC6123C616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC617	-	XC6123C617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC618	-	XC6123C618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC619	-	XC6123C619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC620	-	XC6123C620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC621	-	XC6123C621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC622	-	XC6123C622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC623	-	XC6123C623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC624	-	XC6123C624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC625	-	XC6123C625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC626	-	XC6123C626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC627	-	XC6123C627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC628	-	XC6123C628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC629	-	XC6123C629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC630	-	XC6123C630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC631	-	XC6123C631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC632	-	XC6123C632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC633	-	XC6123C633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC634	-	XC6123C634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC635	-	XC6123C635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC636	-	XC6123C636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC637	-	XC6123C637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC638	-	XC6123C638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC639	-	XC6123C639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC640	-	XC6123C640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC641	-	XC6123C641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC642	-	XC6123C642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC643	-	XC6123C643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC644	-	XC6123C644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC645	-	XC6123C645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC646	-	XC6123C646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC647	-	XC6123C647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC648	-	XC6123C648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC649	-	XC6123C649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC650	-	XC6123C650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC716	-	XC6123C716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC717	-	XC6123C717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC718	-	XC6123C718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC719	-	XC6123C719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC720	-	XC6123C720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC721	-	XC6123C721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC722	-	XC6123C722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC723	-	XC6123C723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC724	-	XC6123C724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC725	-	XC6123C725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC726	-	XC6123C726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC727	-	XC6123C727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC728	-	XC6123C728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC729	-	XC6123C729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC730	-	XC6123C730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC731	-	XC6123C731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC732	-	XC6123C732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC733	-	XC6123C733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC734	-	XC6123C734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC735	-	XC6123C735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RC736	-	XC6123C736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC737	-	XC6123C737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC738	-	XC6123C738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC739	-	XC6123C739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC740	-	XC6123C740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC741	-	XC6123C741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC742	-	XC6123C742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC743	-	XC6123C743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC744	-	XC6123C744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC745	-	XC6123C745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC746	-	XC6123C746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC747	-	XC6123C747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC748	-	XC6123C748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC749	-	XC6123C749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RC750	-	XC6123C750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
RD	-	DW84C3V0NND03	Z-diode	3.0V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
RD	-	RP130K151A	LVR-IC	LDO, LN, -CE, 1.5V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RD	-	RP152L028A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RD096	-	XC9227D096D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 0.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD09C	-	XC9227D09CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 0.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD0M6	-	XC9227D0M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 0.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD0MC	-	XC9227D0MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 0.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD106	-	XC9227D106D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD10C	-	XC9227D10CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD116	-	XC9227D116D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD11C	-	XC9227D11CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD126	-	XC9227D126D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD12C	-	XC9227D12CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD136	-	XC9227D136D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD13C	-	XC9227D13CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD146	-	XC9227D146D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD14C	-	XC9227D14CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD156	-	XC9227D156D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD15C	-	XC9227D15CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD166	-	XC9227D166D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD16C	-	XC9227D16CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD176	-	XC9227D176D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD17C	-	XC9227D17CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD186	-	XC9227D186D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD18C	-	XC9227D18CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD196	-	XC9227D196D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD19C	-	XC9227D19CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1A6	-	XC9227D1A6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1AC	-	XC9227D1ACD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1B6	-	XC9227D1B6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1BC	-	XC9227D1BCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1C6	-	XC9227D1C6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1CC	-	XC9227D1CCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1D6	-	XC9227D1D6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1DC	-	XC9227D1DCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1E6	-	XC9227D1E6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1EC	-	XC9227D1ECD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1F6	-	XC9227D1F6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1FC	-	XC9227D1FCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1H6	-	XC9227D1H6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1HC	-	XC9227D1HCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1K6	-	XC9227D1K6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1KC	-	XC9227D1KCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1L6	-	XC9227D1L6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1LC	-	XC9227D1LCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1M6	-	XC9227D1M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 1.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD1MC	-	XC9227D1MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 1.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD206	-	XC9227D206D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD20C	-	XC9227D20CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD216	-	XC9227D216D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD21C	-	XC9227D21CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD226	-	XC9227D226D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD22C	-	XC9227D22CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD236	-	XC9227D236D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD23C	-	XC9227D23CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RD246	-	XC9227D246D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD24C	-	XC9227D24CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD256	-	XC9227D256D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD25C	-	XC9227D25CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD266	-	XC9227D266D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD26C	-	XC9227D26CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD276	-	XC9227D276D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD27C	-	XC9227D27CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD286	-	XC9227D286D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD28C	-	XC9227D28CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD296	-	XC9227D296D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD29C	-	XC9227D29CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2A6	-	XC9227D2A6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2AC	-	XC9227D2ACD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2B6	-	XC9227D2B6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2BC	-	XC9227D2BCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2C6	-	XC9227D2C6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2CC	-	XC9227D2CCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2D6	-	XC9227D2D6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2DC	-	XC9227D2DCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2E6	-	XC9227D2E6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2EC	-	XC9227D2ECD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2F6	-	XC9227D2F6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2FC	-	XC9227D2FCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2H6	-	XC9227D2H6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2HC	-	XC9227D2HCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2K6	-	XC9227D2K6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2KC	-	XC9227D2KCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2L6	-	XC9227D2L6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2LC	-	XC9227D2LCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2M6	-	XC9227D2M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 2.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD2MC	-	XC9227D2MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 2.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD306	-	XC9227D306D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD30C	-	XC9227D30CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD316	-	XC6123D316ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD316	-	XC9227D316D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD317	-	XC6123D317ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD318	-	XC6123D318ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD319	-	XC6123D319ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD31C	-	XC9227D31CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD320	-	XC6123D320ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD321	-	XC6123D321ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD322	-	XC6123D322ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD323	-	XC6123D323ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD324	-	XC6123D324ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD325	-	XC6123D325ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD326	-	XC6123D326ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD326	-	XC9227D326D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD327	-	XC6123D327ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD328	-	XC6123D328ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD329	-	XC6123D329ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD32C	-	XC9227D32CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD330	-	XC6123D330ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD331	-	XC6123D331ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD332	-	XC6123D332ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD333	-	XC6123D333ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD334	-	XC6123D334ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD335	-	XC6123D335ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD336	-	XC6123D336ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD336	-	XC9227D336D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD337	-	XC6123D337ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD338	-	XC6123D338ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD339	-	XC6123D339ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD33C	-	XC9227D33CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD340	-	XC6123D340ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD341	-	XC6123D341ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD342	-	XC6123D342ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD343	-	XC6123D343ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD344	-	XC6123D344ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD345	-	XC6123D345ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RD346	-	XC6123D346ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD346	-	XC9227D346D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD347	-	XC6123D347ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD348	-	XC6123D348ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD349	-	XC6123D349ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD34C	-	XC9227D34CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD350	-	XC6123D350ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD356	-	XC9227D356D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD35C	-	XC9227D35CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD366	-	XC9227D366D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD36C	-	XC9227D36CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD376	-	XC9227D376D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD37C	-	XC9227D37CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD386	-	XC9227D386D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD38C	-	XC9227D38CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD396	-	XC9227D396D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD39C	-	XC9227D39CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3A6	-	XC9227D3A6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3AC	-	XC9227D3ACD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3B6	-	XC9227D3B6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3BC	-	XC9227D3BCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3C6	-	XC9227D3C6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3CC	-	XC9227D3CCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3D6	-	XC9227D3D6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3DC	-	XC9227D3DCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3E6	-	XC9227D3E6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3EC	-	XC9227D3ECD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3F6	-	XC9227D3F6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3FC	-	XC9227D3FCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3H6	-	XC9227D3H6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3HC	-	XC9227D3HCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3K6	-	XC9227D3K6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3KC	-	XC9227D3KCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3L6	-	XC9227D3L6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3LC	-	XC9227D3LCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3M6	-	XC9227D3M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD3MC	-	XC9227D3MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD406	-	XC9227D406D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 4.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD40C	-	XC9227D40CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 4.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RD416	-	XC6123D416ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD417	-	XC6123D417ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD418	-	XC6123D418ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD419	-	XC6123D419ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD420	-	XC6123D420ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD421	-	XC6123D421ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD422	-	XC6123D422ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD423	-	XC6123D423ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD424	-	XC6123D424ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD425	-	XC6123D425ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD426	-	XC6123D426ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD427	-	XC6123D427ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD428	-	XC6123D428ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD429	-	XC6123D429ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD430	-	XC6123D430ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD431	-	XC6123D431ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD432	-	XC6123D432ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD433	-	XC6123D433ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD434	-	XC6123D434ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD435	-	XC6123D435ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD436	-	XC6123D436ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD437	-	XC6123D437ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD438	-	XC6123D438ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD439	-	XC6123D439ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD440	-	XC6123D440ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD441	-	XC6123D441ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD442	-	XC6123D442ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD443	-	XC6123D443ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD444	-	XC6123D444ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD445	-	XC6123D445ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD446	-	XC6123D446ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RD447	-	XC6123D447ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD448	-	XC6123D448ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD449	-	XC6123D449ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD450	-	XC6123D450ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD516	-	XC6123D516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD517	-	XC6123D517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD518	-	XC6123D518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD519	-	XC6123D519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD520	-	XC6123D520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD521	-	XC6123D521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD522	-	XC6123D522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD523	-	XC6123D523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD524	-	XC6123D524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD525	-	XC6123D525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD526	-	XC6123D526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD527	-	XC6123D527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD528	-	XC6123D528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD529	-	XC6123D529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD530	-	XC6123D530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD531	-	XC6123D531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD532	-	XC6123D532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD533	-	XC6123D533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD534	-	XC6123D534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD535	-	XC6123D535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD536	-	XC6123D536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD537	-	XC6123D537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD538	-	XC6123D538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD539	-	XC6123D539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD540	-	XC6123D540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD541	-	XC6123D541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD542	-	XC6123D542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD543	-	XC6123D543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD544	-	XC6123D544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD545	-	XC6123D545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD546	-	XC6123D546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD547	-	XC6123D547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD548	-	XC6123D548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD549	-	XC6123D549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD550	-	XC6123D550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD616	-	XC6123D616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD617	-	XC6123D617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD618	-	XC6123D618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD619	-	XC6123D619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD620	-	XC6123D620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD621	-	XC6123D621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD622	-	XC6123D622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD623	-	XC6123D623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD624	-	XC6123D624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD625	-	XC6123D625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD626	-	XC6123D626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD627	-	XC6123D627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD628	-	XC6123D628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD629	-	XC6123D629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD630	-	XC6123D630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD631	-	XC6123D631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD632	-	XC6123D632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD633	-	XC6123D633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD634	-	XC6123D634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD635	-	XC6123D635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD636	-	XC6123D636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD637	-	XC6123D637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD638	-	XC6123D638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD639	-	XC6123D639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD640	-	XC6123D640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD641	-	XC6123D641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD642	-	XC6123D642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD643	-	XC6123D643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD644	-	XC6123D644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD645	-	XC6123D645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD646	-	XC6123D646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RD647	-	XC6123D647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD648	-	XC6123D648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD649	-	XC6123D649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD650	-	XC6123D650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD716	-	XC6123D716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD717	-	XC6123D717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD718	-	XC6123D718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD719	-	XC6123D719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD720	-	XC6123D720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD721	-	XC6123D721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD722	-	XC6123D722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD723	-	XC6123D723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD724	-	XC6123D724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD725	-	XC6123D725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD726	-	XC6123D726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD727	-	XC6123D727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD728	-	XC6123D728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD729	-	XC6123D729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD730	-	XC6123D730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD731	-	XC6123D731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD732	-	XC6123D732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD733	-	XC6123D733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD734	-	XC6123D734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD735	-	XC6123D735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD736	-	XC6123D736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD737	-	XC6123D737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD738	-	XC6123D738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD739	-	XC6123D739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD740	-	XC6123D740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD741	-	XC6123D741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD742	-	XC6123D742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD743	-	XC6123D743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD744	-	XC6123D744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD745	-	XC6123D745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD746	-	XC6123D746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD747	-	XC6123D747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD748	-	XC6123D748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD749	-	XC6123D749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RD750	-	XC6123D750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
RE	-	DW84C3V3NND03	Z-diode	3.3V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
RE	-	RP130K161A	LVR-IC	LDO, LN, -CE, 1.6V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RE	-	RP152L029A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RE306	-	XC9227E306D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.0V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE30C	-	XC9227E30CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.0V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE316	-	XC9227E316D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.1V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE31C	-	XC9227E31CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.1V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE326	-	XC9227E326D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.2V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE32C	-	XC9227E32CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.2V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE336	-	XC9227E336D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.3V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE33C	-	XC9227E33CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.3V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE346	-	XC9227E346D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.4V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE34C	-	XC9227E34CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.4V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE356	-	XC9227E356D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.5V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE35C	-	XC9227E35CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.5V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE366	-	XC9227E366D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.6V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE36C	-	XC9227E36CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.6V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE376	-	XC9227E376D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.7V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE37C	-	XC9227E37CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.7V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE386	-	XC9227E386D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.8V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE38C	-	XC9227E38CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.8V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE396	-	XC9227E396D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.9V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE39C	-	XC9227E39CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.9V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3A6	-	XC9227E3A6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.05V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3AC	-	XC9227E3ACD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.05V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3B6	-	XC9227E3B6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.15V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3BC	-	XC9227E3BCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.15V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3C6	-	XC9227E3C6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.25V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3CC	-	XC9227E3CCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.25V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3D6	-	XC9227E3D6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.35V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3DC	-	XC9227E3DCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.35V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RE3E6	-	XC9227E3E6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.45V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3EC	-	XC9227E3ECD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.45V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3F6	-	XC9227E3F6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.55V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3FC	-	XC9227E3FCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.55V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3H6	-	XC9227E3H6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.65V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3HC	-	XC9227E3HCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.65V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3K6	-	XC9227E3K6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.75V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3KC	-	XC9227E3KCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.75V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3L6	-	XC9227E3L6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.85V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3LC	-	XC9227E3LCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.85V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3M6	-	XC9227E3M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.95V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE3MC	-	XC9227E3MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.95V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE406	-	XC9227E406D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 4.0V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE40C	-	XC9227E40CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 4.0V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
RE416	-	XC6123E416ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE417	-	XC6123E417ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE418	-	XC6123E418ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE419	-	XC6123E419ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE420	-	XC6123E420ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE421	-	XC6123E421ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE422	-	XC6123E422ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE423	-	XC6123E423ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE424	-	XC6123E424ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE425	-	XC6123E425ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE426	-	XC6123E426ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE427	-	XC6123E427ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE428	-	XC6123E428ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE429	-	XC6123E429ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE430	-	XC6123E430ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE431	-	XC6123E431ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE432	-	XC6123E432ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE433	-	XC6123E433ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE434	-	XC6123E434ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE435	-	XC6123E435ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE436	-	XC6123E436ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE437	-	XC6123E437ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE438	-	XC6123E438ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE439	-	XC6123E439ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE440	-	XC6123E440ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE441	-	XC6123E441ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE442	-	XC6123E442ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE443	-	XC6123E443ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE444	-	XC6123E444ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE445	-	XC6123E445ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE446	-	XC6123E446ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE447	-	XC6123E447ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE448	-	XC6123E448ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE449	-	XC6123E449ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE450	-	XC6123E450ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE516	-	XC6123E516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE517	-	XC6123E517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE518	-	XC6123E518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE519	-	XC6123E519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE520	-	XC6123E520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE521	-	XC6123E521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE522	-	XC6123E522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE523	-	XC6123E523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE524	-	XC6123E524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE525	-	XC6123E525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE526	-	XC6123E526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE527	-	XC6123E527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE528	-	XC6123E528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE529	-	XC6123E529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE530	-	XC6123E530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE531	-	XC6123E531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE532	-	XC6123E532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE533	-	XC6123E533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE534	-	XC6123E534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE535	-	XC6123E535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE536	-	XC6123E536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RE537	-	XC6123E537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE538	-	XC6123E538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE539	-	XC6123E539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE540	-	XC6123E540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE541	-	XC6123E541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE542	-	XC6123E542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE543	-	XC6123E543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE544	-	XC6123E544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE545	-	XC6123E545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE546	-	XC6123E546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE547	-	XC6123E547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE548	-	XC6123E548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE549	-	XC6123E549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE550	-	XC6123E550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE616	-	XC6123E616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE617	-	XC6123E617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE618	-	XC6123E618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE619	-	XC6123E619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE620	-	XC6123E620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE621	-	XC6123E621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE622	-	XC6123E622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE623	-	XC6123E623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE624	-	XC6123E624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE625	-	XC6123E625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE626	-	XC6123E626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE627	-	XC6123E627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE628	-	XC6123E628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE629	-	XC6123E629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE630	-	XC6123E630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE631	-	XC6123E631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE632	-	XC6123E632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE633	-	XC6123E633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE634	-	XC6123E634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE635	-	XC6123E635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE636	-	XC6123E636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE637	-	XC6123E637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE638	-	XC6123E638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE639	-	XC6123E639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE640	-	XC6123E640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE641	-	XC6123E641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE642	-	XC6123E642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE643	-	XC6123E643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE644	-	XC6123E644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE645	-	XC6123E645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE646	-	XC6123E646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE647	-	XC6123E647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE648	-	XC6123E648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE649	-	XC6123E649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE650	-	XC6123E650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE716	-	XC6123E716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE717	-	XC6123E717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE718	-	XC6123E718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE719	-	XC6123E719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE720	-	XC6123E720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE721	-	XC6123E721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE722	-	XC6123E722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE723	-	XC6123E723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE724	-	XC6123E724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE725	-	XC6123E725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE726	-	XC6123E726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE727	-	XC6123E727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE728	-	XC6123E728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE729	-	XC6123E729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE730	-	XC6123E730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE731	-	XC6123E731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE732	-	XC6123E732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE733	-	XC6123E733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE734	-	XC6123E734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE735	-	XC6123E735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE736	-	XC6123E736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RE737	-	XC6123E737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE738	-	XC6123E738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE739	-	XC6123E739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE740	-	XC6123E740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE741	-	XC6123E741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE742	-	XC6123E742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE743	-	XC6123E743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE744	-	XC6123E744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE745	-	XC6123E745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE746	-	XC6123E746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE747	-	XC6123E747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE748	-	XC6123E748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE749	-	XC6123E749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RE750	-	XC6123E750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
RF	-	DW84C3V6NND03	Z-diode	3.6V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
RF	-	RP130K171A	LVR-IC	LDO, LN, -CE, 1.7V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RF	-	RP152L030A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RF306	-	XC9227F306D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.0V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF30C	-	XC9227F30CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.0V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF316	-	XC9227F316D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.1V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF31C	-	XC9227F31CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.1V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF326	-	XC9227F326D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.2V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF32C	-	XC9227F32CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.2V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF336	-	XC9227F336D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.3V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF33C	-	XC9227F33CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.3V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF346	-	XC9227F346D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.4V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF34C	-	XC9227F34CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.4V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF356	-	XC9227F356D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.5V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF35C	-	XC9227F35CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.5V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF366	-	XC9227F366D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.6V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF36C	-	XC9227F36CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.6V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF376	-	XC9227F376D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.7V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF37C	-	XC9227F37CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.7V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF386	-	XC9227F386D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.8V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF38C	-	XC9227F38CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.8V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF396	-	XC9227F396D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.9V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF39C	-	XC9227F39CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.9V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3A6	-	XC9227F3A6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.05V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3AC	-	XC9227F3ACD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.05V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3B6	-	XC9227F3B6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.15V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3BC	-	XC9227F3BCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.15V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3C6	-	XC9227F3C6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.25V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3CC	-	XC9227F3CCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.25V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3D6	-	XC9227F3D6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.35V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3DC	-	XC9227F3DCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.35V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3E6	-	XC9227F3E6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.45V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3EC	-	XC9227F3ECD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.45V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3F6	-	XC9227F3F6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.55V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3FC	-	XC9227F3FCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.55V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3H6	-	XC9227F3H6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.65V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3HC	-	XC9227F3HCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.65V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3K6	-	XC9227F3K6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.75V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3KC	-	XC9227F3KCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.75V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3L6	-	XC9227F3L6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.85V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3LC	-	XC9227F3LCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.85V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3M6	-	XC9227F3M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.95V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF3MC	-	XC9227F3MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.95V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF406	-	XC9227F406D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 4.0V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF40C	-	XC9227F40CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 4.0V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
RF516	-	XC6123F516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF517	-	XC6123F517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF518	-	XC6123F518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF519	-	XC6123F519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF520	-	XC6123F520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF521	-	XC6123F521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF522	-	XC6123F522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF523	-	XC6123F523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF524	-	XC6123F524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF525	-	XC6123F525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF526	-	XC6123F526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RF527	-	XC6123F527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF528	-	XC6123F528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF529	-	XC6123F529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF530	-	XC6123F530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF531	-	XC6123F531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF532	-	XC6123F532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF533	-	XC6123F533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF534	-	XC6123F534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF535	-	XC6123F535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF536	-	XC6123F536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF537	-	XC6123F537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF538	-	XC6123F538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF539	-	XC6123F539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF540	-	XC6123F540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF541	-	XC6123F541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF542	-	XC6123F542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF543	-	XC6123F543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF544	-	XC6123F544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF545	-	XC6123F545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF546	-	XC6123F546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF547	-	XC6123F547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF548	-	XC6123F548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF549	-	XC6123F549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF550	-	XC6123F550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF616	-	XC6123F616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF617	-	XC6123F617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF618	-	XC6123F618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF619	-	XC6123F619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF620	-	XC6123F620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF621	-	XC6123F621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF622	-	XC6123F622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF623	-	XC6123F623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF624	-	XC6123F624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF625	-	XC6123F625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF626	-	XC6123F626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF627	-	XC6123F627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF628	-	XC6123F628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF629	-	XC6123F629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF630	-	XC6123F630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF631	-	XC6123F631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF632	-	XC6123F632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF633	-	XC6123F633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF634	-	XC6123F634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF635	-	XC6123F635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF636	-	XC6123F636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF637	-	XC6123F637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF638	-	XC6123F638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF639	-	XC6123F639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF640	-	XC6123F640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF641	-	XC6123F641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF642	-	XC6123F642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF643	-	XC6123F643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF644	-	XC6123F644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF645	-	XC6123F645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF646	-	XC6123F646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF647	-	XC6123F647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF648	-	XC6123F648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF649	-	XC6123F649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF650	-	XC6123F650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF716	-	XC6123F716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF717	-	XC6123F717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF718	-	XC6123F718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF719	-	XC6123F719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF720	-	XC6123F720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF721	-	XC6123F721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF722	-	XC6123F722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF723	-	XC6123F723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF724	-	XC6123F724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF725	-	XC6123F725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF726	-	XC6123F726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RF727	-	XC6123F727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF728	-	XC6123F728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF729	-	XC6123F729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF730	-	XC6123F730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF731	-	XC6123F731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF732	-	XC6123F732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF733	-	XC6123F733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF734	-	XC6123F734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF735	-	XC6123F735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF736	-	XC6123F736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF737	-	XC6123F737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF738	-	XC6123F738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF739	-	XC6123F739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF740	-	XC6123F740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF741	-	XC6123F741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF742	-	XC6123F742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF743	-	XC6123F743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF744	-	XC6123F744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF745	-	XC6123F745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF746	-	XC6123F746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF747	-	XC6123F747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF748	-	XC6123F748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF749	-	XC6123F749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RF750	-	XC6123F750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
RG	-	DW84C3V9NND03	Z-diode	3.9V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
RG	-	RP130K181A	LVR-IC	LDO, LN, -CE, 1.8V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RG	-	RP152L031A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RH	-	DW84C4V3NND03	Z-diode	4.3V±10%, If=10mA, 150mW	WBFBP-03B	82eb	-	9m	Jce
RH	-	LD6805K/29H	LVR-IC	LDO, 2.9V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
RH	-	RP130K181A5	LVR-IC	LDO, LN, -CE, 1.85V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RH	-	RP152L032A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RH306	-	XC9227H306D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.0V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH30C	-	XC9227H30CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.0V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH316	-	XC9227H316D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.1V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH31C	-	XC9227H31CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.1V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH326	-	XC9227H326D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.2V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH32C	-	XC9227H32CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.2V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH336	-	XC9227H336D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.3V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH33C	-	XC9227H33CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.3V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH346	-	XC9227H346D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.4V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH34C	-	XC9227H34CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.4V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH356	-	XC9227H356D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.5V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH35C	-	XC9227H35CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.5V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH366	-	XC9227H366D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.6V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH36C	-	XC9227H36CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.6V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH376	-	XC9227H376D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.7V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH37C	-	XC9227H37CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.7V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH386	-	XC9227H386D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.8V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH38C	-	XC9227H38CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.8V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH396	-	XC9227H396D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.9V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH39C	-	XC9227H39CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.9V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3A6	-	XC9227H3A6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.05V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3AC	-	XC9227H3ACD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.05V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3B6	-	XC9227H3B6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.15V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3BC	-	XC9227H3BCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.15V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3C6	-	XC9227H3C6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.25V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3CC	-	XC9227H3CCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.25V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3D6	-	XC9227H3D6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.35V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3DC	-	XC9227H3DCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.35V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3E6	-	XC9227H3E6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.45V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3EC	-	XC9227H3ECD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.45V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3F6	-	XC9227H3F6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.55V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3FC	-	XC9227H3FCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.55V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3H6	-	XC9227H3H6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.65V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3HC	-	XC9227H3HCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.65V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3K6	-	XC9227H3K6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.75V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3KC	-	XC9227H3KCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.75V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3L6	-	XC9227H3L6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.85V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3LC	-	XC9227H3LCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.85V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH3M6	-	XC9227H3M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.95V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RH3MC	-	XC9227H3MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.95V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH406	-	XC9227H406D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 4.0V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RH40C	-	XC9227H40CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 4.0V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
RJ	-	RP130K191A	LVR-IC	LDO, LN, -CE, 1.9V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RJ	-	RP152L033A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RK	-	RP130K201A	LVR-IC	LDO, LN, -CE, 2V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RK	-	RP152L034A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
rl	-	BU22UA3WNVX	LVR-IC	LDO, 2.2V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
RL	-	RP130K211A	LVR-IC	LDO, LN, -CE, 2.1V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RL	-	RP152L035A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RM	-	RP130K221A	LVR-IC	LDO, LN, -CE, 2.2V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RM	-	RP152L036A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RN	-	RP130K231A	LVR-IC	LDO, LN, -CE, 2.3V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RN	-	RP152L037A	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RP	-	LD6805K/29P	LVR-IC	LDO, 2.9V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
RP	-	RP130K241A	LVR-IC	LDO, LN, -CE, 2.4V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RP	-	RP152L038A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RQ	-	RP130K251A	LVR-IC	LDO, LN, -CE, 2.5V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RQ	-	RP152L039A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RR	-	RP130K261A	LVR-IC	LDO, LN, -CE, 2.6V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RR	-	RP152L040A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RS	-	BAR89-02L	Si-diode	Ant sw, 80V, 0.1A, 250mW, Vf<1.1V(0.1A), 0.19pF(1GHz)	TSLP-2-1	13d	-	2b	Inf
RS	-	RP130K271A	LVR-IC	LDO, LN, -CE, 2.7V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RS	-	RP152L041A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RT	-	RP130K281A	LVR-IC	LDO, LN, -CE, 2.8V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RT	-	RP152L042A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RU	-	RP130K281A5	LVR-IC	LDO, LN, -CE, 2.85V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RU	-	RP152L043A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RV	-	RP130K291A	LVR-IC	LDO, LN, -CE, 2.9V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RV	-	RP152L044A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RW	-	RP130K301A	LVR-IC	LDO, LN, -CE, 3V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RW	-	RP152L045A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RX	-	RP130K311A	LVR-IC	LDO, LN, -CE, 3.1V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RX	-	RP152L046A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RY	-	RP130K321A	LVR-IC	LDO, LN, -CE, 3.2V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RY	-	RP152L047A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RZ	-	RP130K331A	LVR-IC	LDO, LN, -CE, 3.3V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
RZ	-	RP152L048A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
RZ306	-	XC9227G306D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.0V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ30C	-	XC9227G30CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.0V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ316	-	XC9227G316D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.1V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ31C	-	XC9227G31CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.1V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ326	-	XC9227G326D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.2V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ32C	-	XC9227G32CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.2V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ336	-	XC9227G336D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.3V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ33C	-	XC9227G33CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.3V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ346	-	XC9227G346D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.4V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ34C	-	XC9227G34CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.4V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ356	-	XC9227G356D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.5V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ35C	-	XC9227G35CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.5V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ366	-	XC9227G366D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.6V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ36C	-	XC9227G36CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.6V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ376	-	XC9227G376D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.7V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ37C	-	XC9227G37CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.7V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ386	-	XC9227G386D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.8V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ38C	-	XC9227G38CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.8V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ396	-	XC9227G396D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.9V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ39C	-	XC9227G39CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.9V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3A6	-	XC9227G3A6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.05V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3AC	-	XC9227G3ACD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.05V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3B6	-	XC9227G3B6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.15V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3BC	-	XC9227G3BCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.15V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3C6	-	XC9227G3C6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.25V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3CC	-	XC9227G3CCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.25V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3D6	-	XC9227G3D6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.35V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3DC	-	XC9227G3DCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.35V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3E6	-	XC9227G3E6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.45V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3EC	-	XC9227G3ECD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.45V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3F6	-	XC9227G3F6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.55V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3FC	-	XC9227G3FCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.55V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
RZ3H6	-	XC9227G3H6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.65V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3HC	-	XC9227G3HCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.65V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3K6	-	XC9227G3K6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.75V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3KC	-	XC9227G3KCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.75V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3L6	-	XC9227G3L6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.85V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3LC	-	XC9227G3LCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.85V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3M6	-	XC9227G3M6D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 3.95V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ3MC	-	XC9227G3MCD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 3.95V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ406	-	XC9227G406D	DC-DC-IC	PWM-PWM/PFM st-dwn, 600kHz, 4.0V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
RZ40C	-	XC9227G40CD	DC-DC-IC	PWM-PWM/PFM st-dwn, 1.2MHz, 4.0V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
S	-	CH751G1-40PT	Si-diode	SBD, 40V, 30mA, Vf<0.37V(1mA)	FBPD-723	17d	-	2b	Chm
S0	-	R3117K173C	Vdet-IC	1.7V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
S0	-	RP114K281D	LVR-IC	LDO, 2.8V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
S012	-	R5220K012A	DC-DC-IC	PWM step-down, +CE, Vdc=1.2V, Vldo=1.1V	PLP2514-6	65dc3	DC8	9b	Ric
S022	-	R5220K022A	DC-DC-IC	PWM step-down, +CE, Vdc=1.5V, Vldo=1.1V	PLP2514-6	65dc3	DC8	9b	Ric
S03	-	XC61GN6002HR	Vdet-IC	6.0V±2%, +Reset ODO	USP-3	17vdc	VD6	9b	Tor
S032	-	R5220K032A	DC-DC-IC	PWM step-down, +CE, Vdc=1.3V, Vldo=1.05V	PLP2514-6	65dc3	DC8	9b	Ric
S042	-	R5220K042A	DC-DC-IC	PWM step-down, +CE, Vdc=1.3V, Vldo=1.1V	PLP2514-6	65dc3	DC8	9b	Ric
S0A	-	XC6118C50AGR-G	Vdet-IC	5.0V±2%, ±Reset PPO, Sense, hysteresis 5%, Cd	USP-4	45me	VD15	9a	Tor
S0B	-	XC6118C50BGR-G	Vdet-IC	5.0V±2%, ±Reset PPO, Sense, hysteresis <1%, Cd	USP-4	45me	VD15	9a	Tor
S0C	-	XC6118C50CGR-G	Vdet-IC	5.0V±2%, ±Reset PPO, Sense, hysteresis 5%	USP-4	45md	VD12	9a	Tor
S0D	-	XC6118C50DGR-G	Vdet-IC	5.0V±2%, ±Reset PPO, Sense, hysteresis <1%	USP-4	45md	VD12	9a	Tor
S1	-	1PS10SB62	Si-diode	Schottky, Sw, Fast, 40V, 20mA, Vf<0.8V(1mA), <0.6pF	SOD-882	13d	-	2b	Phi
S1	-	R3117K183C	Vdet-IC	1.8V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
S1	-	RP114K291D	LVR-IC	LDO, 2.9V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
S1	-	ZXTP717MA	Si-pnp	Sw, Drv, 20V, 4A, 1.5W, B=300..475, 110MHz	DFN2020B-3	82ta	-	9m	Zx
S101	-	R5220K101A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1V	PLP2514-6	65dc3	DC8	9b	Ric
S111	-	R5220K111A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.1V	PLP2514-6	65dc3	DC8	9b	Ric
S121	-	R5220K121A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.2V	PLP2514-6	65dc3	DC8	9b	Ric
S131	-	R5220K131A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.3V	PLP2514-6	65dc3	DC8	9b	Ric
S141	-	R5220K141A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.4V	PLP2514-6	65dc3	DC8	9b	Ric
S151	-	R5220K151A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.5V	PLP2514-6	65dc3	DC8	9b	Ric
S161	-	R5220K161A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.6V	PLP2514-6	65dc3	DC8	9b	Ric
S171	-	R5220K171A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.7V	PLP2514-6	65dc3	DC8	9b	Ric
S181	-	R5220K181A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.8V	PLP2514-6	65dc3	DC8	9b	Ric
S191	-	R5220K191A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.9V	PLP2514-6	65dc3	DC8	9b	Ric
S2	-	BAS16L	Si-diode	Sw, Fast, 75V, 215mA, 250mW, <6ns	SOD-882	13d	-	2b	Nxp
S2	-	MIC5380-3.3/3.3YFT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±2%, 150mA, +CE	MLF-6A	81g5	VR19	9x	Mcr
S2	-	R3117K193C	Vdet-IC	1.9V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
S2	-	RP114K301D	LVR-IC	LDO, 3.0V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
S2	-	ZXTP718MA	Si-pnp	Sw, Drv, 25V, 3.5A, 1.5W, B=300..475, 180MHz	DFN2020B-3	82ta	-	9m	Zx
S201	-	R5220K201A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2V	PLP2514-6	65dc3	DC8	9b	Ric
S211	-	R5220K211A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.1V	PLP2514-6	65dc3	DC8	9b	Ric
S221	-	R5220K221A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.2V	PLP2514-6	65dc3	DC8	9b	Ric
S231	-	R5220K231A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.3V	PLP2514-6	65dc3	DC8	9b	Ric
S241	-	R5220K241A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.4V	PLP2514-6	65dc3	DC8	9b	Ric
S251	-	R5220K251A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.5V	PLP2514-6	65dc3	DC8	9b	Ric
S261	-	R5220K261A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.6V	PLP2514-6	65dc3	DC8	9b	Ric
S271	-	R5220K271A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.7V	PLP2514-6	65dc3	DC8	9b	Ric
S281	-	R5220K281A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.8V	PLP2514-6	65dc3	DC8	9b	Ric
S291	-	R5220K291A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.9V	PLP2514-6	65dc3	DC8	9b	Ric
S3	-	R3117K203C	Vdet-IC	2.0V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
S3	-	RP114K311D	LVR-IC	LDO, 3.1V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
S3	-	ZXTP720MA	Si-pnp	Sw, Drv, 50V, 3A, 1.5W, B=300..480, 190MHz	DFN2020B-3	82ta	-	9m	Zx
S301	-	R5220K301A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=3V	PLP2514-6	65dc3	DC8	9b	Ric
S311	-	R5220K311A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=3.1V	PLP2514-6	65dc3	DC8	9b	Ric
S321	-	R5220K321A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=3.2V	PLP2514-6	65dc3	DC8	9b	Ric
S331	-	R5220K331A	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=3.3V	PLP2514-6	65dc3	DC8	9b	Ric
S4	-	1PS10SB63	Si-diode	Schottky, Sw, Fast, 5V, 20mA, Vf<0.3V(1mA), <0.5pF	SOD-882	13d	-	2b	Phi
S4	-	R3117K213C	Vdet-IC	2.1V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
S4	-	RP114K321D	LVR-IC	LDO, 3.2V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
S4	-	ZXTP722MA	Si-pnp	Sw, Drv, 70V, 2.5A, 1.5W, B=300..470, 180MHz	DFN2020B-3	82ta	-	9m	Zx
S5	-	1PS10SB82	Si-diode	Schottky, Sw, Fast, 15V, 30mA, Vf<0.7V(30mA), <1pF	SOD-882	13d	-	2b	Phi
S5	-	R3117K223C	Vdet-IC	2.2V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
S5	-	RP114K331D	LVR-IC	LDO, 3.3V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
S6	-	BAS40L	Si-diode	SBD, 40V, 200mA, 200mW, Cd<5pF, <5ns	SOD-882	13d	-	2b	Nxp
S6	-	R3117K233C	Vdet-IC	2.3V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
S6	-	RP114K341D	LVR-IC	LDO, 3.4V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
S7	-	R3117K243C	Vdet-IC	2.4V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
S7	-	RP114K351D	LVR-IC	LDO, 3.5V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
S8	-	BAS70L	Si-diode	SBD, GP, 70V, 70mA, Vf<1V(15mA), <2pF, 5ns	SOD-882	13d	-	2b	Nxp
S8	-	R3117K253C	Vdet-IC	2.5V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
S8	-	RP114K361D	LVR-IC	LDO, 3.6V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
S82	-	MIC5338-3.3/2.8YMT1	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 300mA, +CE	MLF-6	74g0	VR19	9x	Mcr
S83	-	MIC5338-2.8/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 300mA, +CE	MLF-6	74g0	VR19	9x	Mcr
S84	-	MIC5338-2.8/1.2YMT1	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.2V±2%, 300mA, +CE	MLF-6	74g0	VR19	9x	Mcr
S85	-	MIC5338-1.8/1.2YMT1	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.2V±2%, 300mA, +CE	MLF-6	74g0	VR19	9x	Mcr
S86	-	MIC5338-1.2/1.0YMT1	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/1.0V±2%, 300mA, +CE	MLF-6	74g0	VR19	9x	Mcr
S8K	-	MIC5370-3.3/2.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.6V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
S9	-	R3117K263C	Vdet-IC	2.6V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
S9	-	RP114K121D5	LVR-IC	LDO, 1.25V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
S92	-	MIC5339-3.3/2.8YMT1	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 300mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
S93	-	MIC5339-2.8/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 300mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
S94	-	MIC5339-2.8/1.2YMT1	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.2V±2%, 300mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
S95	-	MIC5339-1.8/1.2YMT1	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.2V±2%, 300mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
S96	-	MIC5339-1.2/1.0YMT1	LVR-IC	LDO, Dual out, Vo1/Vo2=1.2V/1.0V±2%, 300mA, +CE, CL	MLF-6	74g0	VR19	9x	Mcr
SA	-	RP130K341A	LVR-IC	LDO, LN, -CE, 3.4V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
SA	-	RP152L001B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SAA	-	XC6603A051ER-G	LVR-IC	LDO, 0.5V±15mV, 1A, +CE	USP-6C	49av	VR11a	9b	Tor
SAB	-	XC6603A061ER-G	LVR-IC	LDO, 0.6V±15mV, 1A, +CE	USP-6C	49av	VR11a	9b	Tor
SAC	-	XC6603A071ER-G	LVR-IC	LDO, 0.7V±15mV, 1A, +CE	USP-6C	49av	VR11a	9b	Tor
SAD	-	XC6603A081ER-G	LVR-IC	LDO, 0.8V±15mV, 1A, +CE	USP-6C	49av	VR11a	9b	Tor
SAE	-	XC6603A091ER-G	LVR-IC	LDO, 0.9V±15mV, 1A, +CE	USP-6C	49av	VR11a	9b	Tor
SAF	-	XC6603A101ER-G	LVR-IC	LDO, 1.0V±15mV, 1A, +CE	USP-6C	49av	VR11a	9b	Tor
SAH	-	XC6603A111ER-G	LVR-IC	LDO, 1.1V±15mV, 1A, +CE	USP-6C	49av	VR11a	9b	Tor
SAK	-	XC6603A121ER-G	LVR-IC	LDO, 1.2V±15mV, 1A, +CE	USP-6C	49av	VR11a	9b	Tor
SAL	-	XC6603A131ER-G	LVR-IC	LDO, 1.3V±20mV, 1A, +CE	USP-6C	49av	VR11a	9b	Tor
SAM	-	XC6603A141ER-G	LVR-IC	LDO, 1.4V±20mV, 1A, +CE	USP-6C	49av	VR11a	9b	Tor
SAN	-	XC6603A151ER-G	LVR-IC	LDO, 1.5V±20mV, 1A, +CE	USP-6C	49av	VR11a	9b	Tor
SAP	-	XC6603A161ER-G	LVR-IC	LDO, 1.6V±20mV, 1A, +CE	USP-6C	49av	VR11a	9b	Tor
SAR	-	XC6603A171ER-G	LVR-IC	LDO, 1.7V±20mV, 1A, +CE	USP-6C	49av	VR11a	9b	Tor
SAS	-	XC6603A191ER-G	LVR-IC	LDO, 1.8V±20mV, 1A, +CE	USP-6C	49av	VR11a	9b	Tor
SB	-	RP130K351A	LVR-IC	LDO, LN, -CE, 3.5V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
SB	-	RP152L002B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SC	-	RP130K361A	LVR-IC	LDO, LN, -CE, 3.6V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
SC	-	RP152L003B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SD	-	RP130K371A	LVR-IC	LDO, LN, -CE, 3.7V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
SD	-	RP152L004B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SE	-	RP130K381A	LVR-IC	LDO, LN, -CE, 3.8V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
SE	-	RP152L005B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SF	-	RP130K391A	LVR-IC	LDO, LN, -CE, 3.9V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
SF	-	RP152L006B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SFZ	mb	MIC5310-3.3/1.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.5V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
SG	-	MIC2211-3.3/1.8BML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(150mA)/1.8V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
SG	-	RP130K401A	LVR-IC	LDO, LN, -CE, 4V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
SG	-	RP152L007B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SG8	-	MIC5370-3.3/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
SGZ	mb	MIC5310-3.3/1.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
SH	-	LD6805K/30H	LVR-IC	LDO, 3.0V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
SH	-	RP130K411A	LVR-IC	LDO, LN, -CE, 4.1V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
SH	-	RP152L008B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SJ	-	RP130K421A	LVR-IC	LDO, LN, -CE, 4.2V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
SJ	-	RP152L009B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SJZ	mb	MIC5310-3.3/2.5YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.5V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
SK	-	RP130K431A	LVR-IC	LDO, LN, -CE, 4.3V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
SK	-	RP152L010B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SKZ	mb	MIC5310-3.3/2.6YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.6V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
SL	-	RP130K441A	LVR-IC	LDO, LN, -CE, 4.4V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
SL	-	RP152L011B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SLA	-	MIC2287-15BML	DC-DC-IC	PWM boost converter, 1.2MHz, 15V OVP	MLF-8	75bn	LD1	9m	Mcr
SLA	mc	MIC2287-15YML	DC-DC-IC	PWM boost converter, 1.2MHz, 15V OVP, Lead. Free	MLF-8	75bn	LD1	9m	Mcr
SLA	md	MIC2287-15YML	DC-DC-IC	PWM boost converter, 1.2MHz, 15V OVP, Lead. Free	MLF-8	75bn	LD1	9m	Mcr
SLB	-	MIC2287-24BML	DC-DC-IC	PWM boost converter, 1.2MHz, 24V OVP	MLF-8	75bn	LD1	9m	Mcr
SLB	mc	MIC2287-24YML	DC-DC-IC	PWM boost converter, 1.2MHz, 24V OVP, Lead. Free	MLF-8	75bn	LD1	9m	Mcr
SLB	md	MIC2287-24YML	DC-DC-IC	PWM boost converter, 1.2MHz, 24V OVP, Lead. Free	MLF-8	75bn	LD1	9m	Mcr
SLC	-	MIC2287-34BML	DC-DC-IC	PWM boost converter, 1.2MHz, 34V OVP	MLF-8	75bn	LD1	9m	Mcr
SLC	mc	MIC2287-34YML	DC-DC-IC	PWM boost converter, 1.2MHz, 34V OVP, Lead. Free	MLF-8	75bn	LD1	9m	Mcr
SLC	md	MIC2287-34YML	DC-DC-IC	PWM boost converter, 1.2MHz, 34V OVP, Lead. Free	MLF-8	75bn	LD1	9m	Mcr
SM	-	MIC2211-3.3/2.8BML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(150mA)/2.8V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
SM	-	RP130K451A	LVR-IC	LDO, LN, -CE, 4.5V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SM	-	RP152L012B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SM18G	-	LR1106G-18-V26-B	LVR-IC	LDO, 1.8V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM18L	-	LR1106L-18-V26-B	LVR-IC	LDO, 1.8V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM19G	-	LR1106G-19-V26-B	LVR-IC	LDO, 1.9V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM19L	-	LR1106L-19-V26-B	LVR-IC	LDO, 1.9V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM20G	-	LR1106G-20-V26-B	LVR-IC	LDO, 2.0V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM20L	-	LR1106L-20-V26-B	LVR-IC	LDO, 2.0V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM21G	-	LR1106G-21-V26-B	LVR-IC	LDO, 2.1V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM21L	-	LR1106L-21-V26-B	LVR-IC	LDO, 2.1V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM22G	-	LR1106G-22-V26-B	LVR-IC	LDO, 2.2V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM22L	-	LR1106L-22-V26-B	LVR-IC	LDO, 2.2V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM23G	-	LR1106G-23-V26-B	LVR-IC	LDO, 2.3V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM23L	-	LR1106L-23-V26-B	LVR-IC	LDO, 2.3V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM24G	-	LR1106G-24-V26-B	LVR-IC	LDO, 2.4V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM24L	-	LR1106L-24-V26-B	LVR-IC	LDO, 2.4V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM25G	-	LR1106G-25-V26-B	LVR-IC	LDO, 2.5V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM25L	-	LR1106L-25-V26-B	LVR-IC	LDO, 2.5V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM26G	-	LR1106G-26-V26-B	LVR-IC	LDO, 2.6V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM26L	-	LR1106L-26-V26-B	LVR-IC	LDO, 2.6V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM27G	-	LR1106G-27-V26-B	LVR-IC	LDO, 2.7V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM27L	-	LR1106L-27-V26-B	LVR-IC	LDO, 2.7V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM28G	-	LR1106G-28-V26-B	LVR-IC	LDO, 2.8V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM28L	-	LR1106L-28-V26-B	LVR-IC	LDO, 2.8V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM29G	-	LR1106G-29-V26-B	LVR-IC	LDO, 2.9V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM29L	-	LR1106L-29-V26-B	LVR-IC	LDO, 2.9V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM2JG	-	LR1106G-2J-V26-B	LVR-IC	LDO, 2.85V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM2JL	-	LR1106L-2J-V26-B	LVR-IC	LDO, 2.85V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM30G	-	LR1106G-30-V26-B	LVR-IC	LDO, 3.0V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM30L	-	LR1106L-30-V26-B	LVR-IC	LDO, 3.0V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM31G	-	LR1106G-31-V26-B	LVR-IC	LDO, 3.1V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM31L	-	LR1106L-31-V26-B	LVR-IC	LDO, 3.1V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM32G	-	LR1106G-32-V26-B	LVR-IC	LDO, 3.2V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM32L	-	LR1106L-32-V26-B	LVR-IC	LDO, 3.2V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM33G	-	LR1106G-33-V26-B	LVR-IC	LDO, 3.3V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM33L	-	LR1106L-33-V26-B	LVR-IC	LDO, 3.3V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM34G	-	LR1106G-34-V26-B	LVR-IC	LDO, 3.4V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM34L	-	LR1106L-34-V26-B	LVR-IC	LDO, 3.4V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM35G	-	LR1106G-35-V26-B	LVR-IC	LDO, 3.5V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM35L	-	LR1106L-35-V26-B	LVR-IC	LDO, 3.5V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM36G	-	LR1106G-36-V26-B	LVR-IC	LDO, 3.6V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM36L	-	LR1106L-36-V26-B	LVR-IC	LDO, 3.6V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM37G	-	LR1106G-37-V26-B	LVR-IC	LDO, 3.7V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM37L	-	LR1106L-37-V26-B	LVR-IC	LDO, 3.7V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM38G	-	LR1106G-38-V26-B	LVR-IC	LDO, 3.8V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM38L	-	LR1106L-38-V26-B	LVR-IC	LDO, 3.8V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM39G	-	LR1106G-39-V26-B	LVR-IC	LDO, 3.9V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM39L	-	LR1106L-39-V26-B	LVR-IC	LDO, 3.9V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM40G	-	LR1106G-40-V26-B	LVR-IC	LDO, 4.0V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM40L	-	LR1106L-40-V26-B	LVR-IC	LDO, 4.0V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM41G	-	LR1106G-41-V26-B	LVR-IC	LDO, 4.1V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM41L	-	LR1106L-41-V26-B	LVR-IC	LDO, 4.1V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM42G	-	LR1106G-42-V26-B	LVR-IC	LDO, 4.2V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM42L	-	LR1106L-42-V26-B	LVR-IC	LDO, 4.2V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM43G	-	LR1106G-43-V26-B	LVR-IC	LDO, 4.3V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM43L	-	LR1106L-43-V26-B	LVR-IC	LDO, 4.3V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM44G	-	LR1106G-44-V26-B	LVR-IC	LDO, 4.4V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM44L	-	LR1106L-44-V26-B	LVR-IC	LDO, 4.4V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM45G	-	LR1106G-45-V26-B	LVR-IC	LDO, 4.5V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM45L	-	LR1106L-45-V26-B	LVR-IC	LDO, 4.5V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM46G	-	LR1106G-46-V26-B	LVR-IC	LDO, 4.6V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM46L	-	LR1106L-46-V26-B	LVR-IC	LDO, 4.6V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM47G	-	LR1106G-47-V26-B	LVR-IC	LDO, 4.7V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM47L	-	LR1106L-47-V26-B	LVR-IC	LDO, 4.7V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM48G	-	LR1106G-48-V26-B	LVR-IC	LDO, 4.8V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM48L	-	LR1106L-48-V26-B	LVR-IC	LDO, 4.8V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM49G	-	LR1106G-49-V26-B	LVR-IC	LDO, 4.9V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM49L	-	LR1106L-49-V26-B	LVR-IC	LDO, 4.9V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM50G	-	LR1106G-50-V26-B	LVR-IC	LDO, 5.0V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM50L	-	LR1106L-50-V26-B	LVR-IC	LDO, 5.0V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM51G	-	LR1106G-51-V26-B	LVR-IC	LDO, 5.1V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
SM51L	-	LR1106L-51-V26-B	LVR-IC	LDO, 5.1V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM52G	-	LR1106G-52-V26-B	LVR-IC	LDO, 5.2V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM52L	-	LR1106L-52-V26-B	LVR-IC	LDO, 5.2V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM53G	-	LR1106G-53-V26-B	LVR-IC	LDO, 5.3V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM53L	-	LR1106L-53-V26-B	LVR-IC	LDO, 5.3V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM54G	-	LR1106G-54-V26-B	LVR-IC	LDO, 5.4V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM54L	-	LR1106L-54-V26-B	LVR-IC	LDO, 5.4V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM55G	-	LR1106G-55-V26-B	LVR-IC	LDO, 5.5V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM55L	-	LR1106L-55-V26-B	LVR-IC	LDO, 5.5V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM56G	-	LR1106G-56-V26-B	LVR-IC	LDO, 5.6V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM56L	-	LR1106L-56-V26-B	LVR-IC	LDO, 5.6V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM57G	-	LR1106G-57-V26-B	LVR-IC	LDO, 5.7V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM57L	-	LR1106L-57-V26-B	LVR-IC	LDO, 5.7V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM58G	-	LR1106G-58-V26-B	LVR-IC	LDO, 5.8V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM58L	-	LR1106L-58-V26-B	LVR-IC	LDO, 5.8V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM59G	-	LR1106G-59-V26-B	LVR-IC	LDO, 5.9V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM59L	-	LR1106L-59-V26-B	LVR-IC	LDO, 5.9V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM60G	-	LR1106G-60-V26-B	LVR-IC	LDO, 6.0V±2%, 400mA, +CE, Halogen-free	VSON-6	56hq	VR4	9b	Utc
SM60L	-	LR1106L-60-V26-B	LVR-IC	LDO, 6.0V±2%, 400mA, +CE, Lead-free	VSON-6	56hq	VR4	9b	Utc
SM8	-	MIC5370-3.3/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
SMZ	mb	MIC5310-3.3/2.8YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
SN	-	RP130K461A	LVR-IC	LDO, LN, -CE, 4.6V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
SN	-	RP152L013B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SNA	-	MIC2289-15BML	LDR-IC	1.2 MHz PWM White LED driver, OVP 15V	MLF-8	75lc	LD1	9m	Mcr
SNA	me	MIC2289-15YML	LDR-IC	1.2 MHz PWM White LED driver, OVP 15V, Pb Free	MLF-8	75lc	LD1	9m	Mcr
SNB	-	MIC2289-24BML	LDR-IC	1.2 MHz PWM White LED driver, OVP 24V	MLF-8	75lc	LD1	9m	Mcr
SNB	me	MIC2289-24YML	LDR-IC	1.2 MHz PWM White LED driver, OVP 24V, Pb Free	MLF-8	75lc	LD1	9m	Mcr
SNC	-	MIC2289-34BML	LDR-IC	1.2 MHz PWM White LED driver, OVP 34V	MLF-8	75lc	LD1	9m	Mcr
SNC	me	MIC2289-34YML	LDR-IC	1.2 MHz PWM White LED driver, OVP 34V, Pb Free	MLF-8	75lc	LD1	9m	Mcr
SNZ	mb	MIC5310-3.3/2.85YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.85V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
SOZ	mb	MIC5310-3.3/2.9YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.9V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
SP	-	LD6805K/30P	LVR-IC	LDO, 3.0V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
SP	-	RP130K471A	LVR-IC	LDO, LN, -CE, 4.7V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
SP	-	RP152L014B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SP8	-	MIC5370-3.3/3.0YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.0V±2%, 150mA, +CE	MLF-6	74g0	VR19	9x	Mcr
SPF	-	MIC5335-3.3/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.5V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
SPG	-	MIC5335-3.3/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/1.8V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
SPJ	-	MIC5335-3.3/2.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.5V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
SPK	-	MIC5335-3.3/2.6YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.6V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
SPL	-	MIC5335-3.3/2.7YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.7V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
SPM	-	MIC5335-3.3/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.8V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
SPN	-	MIC5335-3.3/2.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.85V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
SPO	-	MIC5335-3.3/2.9YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/2.9V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
SPP	-	MIC5335-3.3/3.0YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.0V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
SPR	-	MIC5335-3.3/3.2YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.2V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
SPS	-	MIC5335-3.3/3.3YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±2%, 300mA, +CE	MLF-6	74g0	VR19	9i	Mcr
SPZ	mb	MIC5310-3.3/3.0YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.0V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
SQ	-	RP130K481A	LVR-IC	LDO, LN, -CE, 4.8V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
SQ	-	RP152L015B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SR	-	RP130K491A	LVR-IC	LDO, LN, -CE, 4.9V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
SR	-	RP152L016B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SRZ	mb	MIC5310-3.3/3.2YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.2V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
SS	-	MIC2211-3.3/3.3BML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V(150mA)/3.3V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
SS	-	RP130K501A	LVR-IC	LDO, LN, -CE, 5V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
SS	-	RP152L017B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SSZ	mb	MIC5310-3.3/3.3YML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.3V/3.3V±2%, 150mA, +CE	MLF-8	75e9	VR29	9i	Mcr
ST	-	RP152L018B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SU	-	RP152L019B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SV	-	RP152L020B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SW	-	RP152L021B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SX	-	RP152L022B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SY	-	RP152L023B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
SZ	-	RP152L024B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
T0	-	R3117K273C	Vdet-IC	2.7V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
T0	-	RP114K181D5	LVR-IC	LDO, 1.85V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
T012	-	R5220K012B	DC-DC-IC	PWM step-down, +CE, Vdc=1.2V, Vldo=1.1V	PLP2514-6	65dc3	DC8	9b	Ric
T022	-	R5220K022B	DC-DC-IC	PWM step-down, +CE, Vdc=1.5V, Vldo=1.1V	PLP2514-6	65dc3	DC8	9b	Ric
T032	-	R5220K032B	DC-DC-IC	PWM step-down, +CE, Vdc=1.3V, Vldo=1.05V	PLP2514-6	65dc3	DC8	9b	Ric
T042	-	R5220K042B	DC-DC-IC	PWM step-down, +CE, Vdc=1.3V, Vldo=1.1V	PLP2514-6	65dc3	DC8	9b	Ric
T1	-	R3117K283C	Vdet-IC	2.8V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T1	-	RP114K281D5	LVR-IC	LDO, 2.85V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
T101	-	R5220K101B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1V	PLP2514-6	65dc3	DC8	9b	Ric
T111	-	R5220K111B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.1V	PLP2514-6	65dc3	DC8	9b	Ric
T121	-	R5220K121B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.2V	PLP2514-6	65dc3	DC8	9b	Ric
T131	-	R5220K131B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.3V	PLP2514-6	65dc3	DC8	9b	Ric
T141	-	R5220K141B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.4V	PLP2514-6	65dc3	DC8	9b	Ric
T151	-	R5220K151B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.5V	PLP2514-6	65dc3	DC8	9b	Ric
T161	-	R5220K161B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.6V	PLP2514-6	65dc3	DC8	9b	Ric
T171	-	R5220K171B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.7V	PLP2514-6	65dc3	DC8	9b	Ric
T181	-	R5220K181B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.8V	PLP2514-6	65dc3	DC8	9b	Ric
T191	-	R5220K191B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=1.9V	PLP2514-6	65dc3	DC8	9b	Ric
T2	-	R3117K293C	Vdet-IC	2.9V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
T2	-	RP114K341D5	LVR-IC	LDO, 3.45V±1%, 300mA, +CE, CL	DFN1010-4	48vm	VR4	9a	Ric
T201	-	R5220K201B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2V	PLP2514-6	65dc3	DC8	9b	Ric
T211	-	R5220K211B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.1V	PLP2514-6	65dc3	DC8	9b	Ric
T221	-	R5220K221B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.2V	PLP2514-6	65dc3	DC8	9b	Ric
T231	-	R5220K231B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.3V	PLP2514-6	65dc3	DC8	9b	Ric
T241	-	R5220K241B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.4V	PLP2514-6	65dc3	DC8	9b	Ric
T251	-	R5220K251B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.5V	PLP2514-6	65dc3	DC8	9b	Ric
T261	-	R5220K261B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.6V	PLP2514-6	65dc3	DC8	9b	Ric
T271	-	R5220K271B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.7V	PLP2514-6	65dc3	DC8	9b	Ric
T281	-	R5220K281B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.8V	PLP2514-6	65dc3	DC8	9b	Ric
T291	-	R5220K291B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=2.9V	PLP2514-6	65dc3	DC8	9b	Ric
T3	-	R3117K303C	Vdet-IC	3.0V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
T301	-	R5220K301B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=3V	PLP2514-6	65dc3	DC8	9b	Ric
T311	-	R5220K311B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=3.1V	PLP2514-6	65dc3	DC8	9b	Ric
T321	-	R5220K321B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=3.2V	PLP2514-6	65dc3	DC8	9b	Ric
T331	-	R5220K331B	DC-DC-IC	PWM step-down, +CE, Vdc=Vldo=3.3V	PLP2514-6	65dc3	DC8	9b	Ric
T4	-	R3117K313C	Vdet-IC	3.1V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
T5	-	R3117K323C	Vdet-IC	3.2V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
T6	-	R3117K333C	Vdet-IC	3.3V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
T7	-	R3117K343C	Vdet-IC	3.4V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
T78	-	XC6218P09H	LVR-IC	LDO, 0.9V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T79	-	XC6218P10H	LVR-IC	LDO, 1.0V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7A	-	XC6218P11H	LVR-IC	LDO, 1.1V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7B	-	XC6218P12H	LVR-IC	LDO, 1.2V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7C	-	XC6218P13H	LVR-IC	LDO, 1.3V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7D	-	XC6218P14H	LVR-IC	LDO, 1.4V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7E	-	XC6218P15H	LVR-IC	LDO, 1.5V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7F	-	XC6218P16H	LVR-IC	LDO, 1.6V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7H	-	XC6218P17H	LVR-IC	LDO, 1.7V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7K	-	XC6218P18H	LVR-IC	LDO, 1.8V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7L	-	XC6218P19H	LVR-IC	LDO, 1.9V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7M	-	XC6218P20H	LVR-IC	LDO, 2.0V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7N	-	XC6218P21H	LVR-IC	LDO, 2.1V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7P	-	XC6218P22H	LVR-IC	LDO, 2.2V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7R	-	XC6218P23H	LVR-IC	LDO, 2.3V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7S	-	XC6218P24H	LVR-IC	LDO, 2.4V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7T	-	XC6218P25H	LVR-IC	LDO, 2.5V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7U	-	XC6218P26H	LVR-IC	LDO, 2.6V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7V	-	XC6218P27H	LVR-IC	LDO, 2.7V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7X	-	XC6218P28H	LVR-IC	LDO, 2.8V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7Y	-	XC6218P29H	LVR-IC	LDO, 2.9V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T7Z	-	XC6218P30H	LVR-IC	LDO, 3.0V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T8	-	PF2015UDF8B	ESDP-diode	EMI filtering TVS, 5V, 100MHz	UDFN-8B	56	-	9g	Kec
T8	-	R3117K353C	Vdet-IC	3.5V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
T80	-	XC6218P31H	LVR-IC	LDO, 3.1V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T81	-	XC6218P32H	LVR-IC	LDO, 3.2V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T82	-	XC6218P33H	LVR-IC	LDO, 3.3V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T83	-	XC6218P34H	LVR-IC	LDO, 3.4V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T84	-	XC6218P35H	LVR-IC	LDO, 3.5V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T85	-	XC6218P36H	LVR-IC	LDO, 3.6V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T86	-	XC6218P37H	LVR-IC	LDO, 3.7V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T87	-	XC6218P38H	LVR-IC	LDO, 3.8V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T88	-	XC6218P39H	LVR-IC	LDO, 3.9V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T89	-	XC6218P40H	LVR-IC	LDO, 4.0V±2%, 200mA	USP-3	17vj	VR1	9b	Tor
T8A	-	XC6118N08AGR-G	Vdet-IC	0.8V±30mV, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
T8B	-	XC6118N08BGR-G	Vdet-IC	0.8V±30mV, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
T8C	-	XC6118N08CGR-G	Vdet-IC	0.8V±30mV, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
T8D	-	XC6118N08DGR-G	Vdet-IC	0.8V±30mV, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
T9	-	R3117K363C	Vdet-IC	3.6V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
T9A	-	XC6118N09AGR-G	Vdet-IC	0.9V±30mV, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
T9B	-	XC6118N09BGR-G	Vdet-IC	0.9V±30mV, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
T9C	-	XC6118N09CGR-G	Vdet-IC	0.9V±30mV, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
T9D	-	XC6118N09DGR-G	Vdet-IC	0.9V±30mV, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
TA	-	RP130K121B	LVR-IC	LDO, LN, +CE, 1.2V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TA	-	RP152L025B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TA0	-	XC6902N091ER-G	LVR-IC	-0.9V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TA1	-	XC6902N101ER-G	LVR-IC	-1.0V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TA2	-	XC6902N111ER-G	LVR-IC	-1.1V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TA3	-	XC6902N121ER-G	LVR-IC	-1.2V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TA4	-	XC6902N131ER-G	LVR-IC	-1.3V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TA5	-	XC6902N141ER-G	LVR-IC	-1.4V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TA6	-	XC6902N151ER-G	LVR-IC	-1.5V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TA7	-	XC6902N161ER-G	LVR-IC	-1.6V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TA8	-	XC6902N171ER-G	LVR-IC	-1.7V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TA9	-	XC6902N181ER-G	LVR-IC	-1.8V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAA	-	XC6902N191ER-G	LVR-IC	-1.9V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAB	-	XC6902N201ER-G	LVR-IC	-2.0V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAC	-	XC6902N211ER-G	LVR-IC	-2.1V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAD	-	XC6902N221ER-G	LVR-IC	-2.2V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAE	-	XC6902N231ER-G	LVR-IC	-2.3V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAF	-	XC6902N241ER-G	LVR-IC	-2.4V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAH	-	XC6902N251ER-G	LVR-IC	-2.5V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAK	-	XC6902N261ER-G	LVR-IC	-2.6V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAL	-	XC6902N271ER-G	LVR-IC	-2.7V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAM	-	XC6902N281ER-G	LVR-IC	-2.8V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAN	-	XC6902N291ER-G	LVR-IC	-2.9V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAP	-	XC6902N301ER-G	LVR-IC	-3.0V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAR	-	XC6902N311ER-G	LVR-IC	-3.1V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAS	-	XC6902N321ER-G	LVR-IC	-3.2V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAT	-	XC6902N331ER-G	LVR-IC	-3.3V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAU	-	XC6902N341ER-G	LVR-IC	-3.4V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAV	-	XC6902N351ER-G	LVR-IC	-3.5V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAX	-	XC6902N361ER-G	LVR-IC	-3.6V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAY	-	XC6902N371ER-G	LVR-IC	-3.7V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TAZ	-	XC6902N381ER-G	LVR-IC	-3.8V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TB	-	RP130K131B	LVR-IC	LDO, LN, +CE, 1.3V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TB	-	RP152L026B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TB0	-	XC6902N391ER-G	LVR-IC	-3.9V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TB1	-	XC6902N401ER-G	LVR-IC	-4.0V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TB2	-	XC6902N411ER-G	LVR-IC	-4.1V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TB3	-	XC6902N421ER-G	LVR-IC	-4.2V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TB4	-	XC6902N431ER-G	LVR-IC	-4.3V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TB5	-	XC6902N441ER-G	LVR-IC	-4.4V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TB6	-	XC6902N451ER-G	LVR-IC	-4.5V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TB7	-	XC6902N461ER-G	LVR-IC	-4.6V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TB8	-	XC6902N471ER-G	LVR-IC	-4.7V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TB9	-	XC6902N481ER-G	LVR-IC	-4.8V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBA	-	XC6902N491ER-G	LVR-IC	-4.9V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBB	-	XC6902N501ER-G	LVR-IC	-5.0V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBC	-	XC6902N511ER-G	LVR-IC	-5.1V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBD	-	XC6902N521ER-G	LVR-IC	-5.2V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBE	-	XC6902N531ER-G	LVR-IC	-5.3V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBF	-	XC6902N541ER-G	LVR-IC	-5.4V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBH	-	XC6902N551ER-G	LVR-IC	-5.5V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBK	-	XC6902N561ER-G	LVR-IC	-5.6V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBL	-	XC6902N571ER-G	LVR-IC	-5.7V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBM	-	XC6902N581ER-G	LVR-IC	-5.8V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBN	-	XC6902N591ER-G	LVR-IC	-5.9V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBP	-	XC6902N601ER-G	LVR-IC	-6.0V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBR	-	XC6902N611ER-G	LVR-IC	-6.1V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBS	-	XC6902N621ER-G	LVR-IC	-6.2V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBT	-	XC6902N631ER-G	LVR-IC	-6.3V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBU	-	XC6902N641ER-G	LVR-IC	-6.4V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBV	-	XC6902N651ER-G	LVR-IC	-6.5V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBX	-	XC6902N661ER-G	LVR-IC	-6.6V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBY	-	XC6902N671ER-G	LVR-IC	-6.7V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TBZ	-	XC6902N681ER-G	LVR-IC	-6.8V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TC	-	RP130K141B	LVR-IC	LDO, LN, +CE, 1.4V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
TC	-	RP152L027B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TC0	-	XC6902N691ER-G	LVR-IC	-6.9V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TC1	-	XC6902N701ER-G	LVR-IC	-7.0V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TC2	-	XC6902N711ER-G	LVR-IC	-7.1V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TC3	-	XC6902N721ER-G	LVR-IC	-7.2V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TC4	-	XC6902N731ER-G	LVR-IC	-7.3V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TC5	-	XC6902N741ER-G	LVR-IC	-7.4V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TC6	-	XC6902N751ER-G	LVR-IC	-7.5V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TC7	-	XC6902N761ER-G	LVR-IC	-7.6V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TC8	-	XC6902N771ER-G	LVR-IC	-7.7V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TC9	-	XC6902N781ER-G	LVR-IC	-7.8V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCA	-	XC6902N791ER-G	LVR-IC	-7.9V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCB	-	XC6902N801ER-G	LVR-IC	-8.0V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCC	-	XC6902N811ER-G	LVR-IC	-8.1V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCD	-	XC6902N821ER-G	LVR-IC	-8.2V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCE	-	XC6902N831ER-G	LVR-IC	-8.3V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCF	-	XC6902N841ER-G	LVR-IC	-8.4V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCH	-	XC6902N851ER-G	LVR-IC	-8.5V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCK	-	XC6902N861ER-G	LVR-IC	-8.6V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCL	-	XC6902N871ER-G	LVR-IC	-8.7V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCM	-	XC6902N881ER-G	LVR-IC	-8.8V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCN	-	XC6902N891ER-G	LVR-IC	-8.9V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCP	-	XC6902N901ER-G	LVR-IC	-9.0V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCR	-	XC6902N911ER-G	LVR-IC	-9.1V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCS	-	XC6902N921ER-G	LVR-IC	-9.2V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCT	-	XC6902N931ER-G	LVR-IC	-9.3V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCU	-	XC6902N941ER-G	LVR-IC	-9.4V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCV	-	XC6902N951ER-G	LVR-IC	-9.5V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCX	-	XC6902N961ER-G	LVR-IC	-9.6V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCY	-	XC6902N971ER-G	LVR-IC	-9.7V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TCZ	-	XC6902N981ER-G	LVR-IC	-9.8V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TD	-	RP130K151B	LVR-IC	LDO, LN, +CE, 1.5V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TD	-	RP152L028B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TD0	-	XC6902N991ER-G	LVR-IC	-9.9V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TD1	-	XC6902NA01ER-G	LVR-IC	-10.0V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TD2	-	XC6902NA11ER-G	LVR-IC	-10.1V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TD3	-	XC6902NA21ER-G	LVR-IC	-10.2V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TD4	-	XC6902NA31ER-G	LVR-IC	-10.3V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TD5	-	XC6902NA41ER-G	LVR-IC	-10.4V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TD6	-	XC6902NA51ER-G	LVR-IC	-10.5V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TD7	-	XC6902NA61ER-G	LVR-IC	-10.6V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TD8	-	XC6902NA71ER-G	LVR-IC	-10.7V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TD9	-	XC6902NA81ER-G	LVR-IC	-10.8V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TDA	-	XC6902NA91ER-G	LVR-IC	-10.9V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TDB	-	XC6902NB01ER-G	LVR-IC	-11.0V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TDC	-	XC6902NB11ER-G	LVR-IC	-11.1V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TDD	-	XC6902NB21ER-G	LVR-IC	-11.2V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TDE	-	XC6902NB31ER-G	LVR-IC	-11.3V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TDF	-	XC6902NB41ER-G	LVR-IC	-11.4V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TDH	-	XC6902NB51ER-G	LVR-IC	-11.5V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TDK	-	XC6902NB61ER-G	LVR-IC	-11.6V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TDL	-	XC6902NB71ER-G	LVR-IC	-11.7V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TDM	-	XC6902NB81ER-G	LVR-IC	-11.8V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TDN	-	XC6902NB91ER-G	LVR-IC	-11.9V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TDP	-	XC6902NC01ER-G	LVR-IC	-12.0V±1.5%, 500mA, soft start	USP-6C	49ez	VR2	9a	Tor
TE	-	RP130K161B	LVR-IC	LDO, LN, +CE, 1.6V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TE	-	RP152L029B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TF	-	RP130K171B	LVR-IC	LDO, LN, +CE, 1.7V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TF	-	RP152L030B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TG	-	RP130K181B	LVR-IC	LDO, LN, +CE, 1.8V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TG	-	RP152L031B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TH	-	LD6805K/31H	LVR-IC	LDO, 3.1V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
TH	-	RP130K181B5	LVR-IC	LDO, LN, +CE, 1.85V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TH	-	RP152L032B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TJ	-	RP130K191B	LVR-IC	LDO, LN, +CE, 1.9V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TJ	-	RP152L033B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TK	-	RP130K201B	LVR-IC	LDO, LN, +CE, 2V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TK	-	RP152L034B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TL	-	RP130K211B	LVR-IC	LDO, LN, +CE, 2.1V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TL	-	RP152L035B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
TM	-	RP130K221B	LVR-IC	LDO, LN, +CE, 2.2V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TM	-	RP152L036B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TN	-	RP130K231B	LVR-IC	LDO, LN, +CE, 2.3V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TN	-	RP152L037B	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TP	-	LD6805K/31P	LVR-IC	LDO, 3.1V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
TP	-	RP130K241B	LVR-IC	LDO, LN, +CE, 2.4V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TP	-	RP152L038B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TQ	-	RP130K251B	LVR-IC	LDO, LN, +CE, 2.5V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TQ	-	RP152L039B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TR	-	RP130K261B	LVR-IC	LDO, LN, +CE, 2.6V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TR	-	RP152L040B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TS	-	BAT54M1PT	Si-diode	SBD, 30V, 200mA, Vf<1V(100mA), 5ns	FBPT-723	17d	-	2b	Chm
TS	-	RP130K271B	LVR-IC	LDO, LN, +CE, 2.7V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TS	-	RP152L041B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TT	-	RP130K281B	LVR-IC	LDO, LN, +CE, 2.8V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TT	-	RP152L042B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TU	-	74LVC1G10FW4	CMOS-Log	3-input NAND gate	DFN1010	80	Log29	9u	Di
TU	-	74LVC1G10FZ4	CMOS-Log	3-input NAND gate	DFN1410	52	Log29	9u	Di
TU	-	RP130K281B5	LVR-IC	LDO, LN, +CE, 2.85V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TU	-	RP152L043B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TV	-	74LVC1G11FW4	CMOS-Log	3-input AND gate	DFN1010	80	Log30	9u	Di
TV	-	74LVC1G11FZ4	CMOS-Log	3-input AND gate	DFN1410	52	Log30	9u	Di
TV	-	RP130K291B	LVR-IC	LDO, LN, +CE, 2.9V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TV	-	RP152L044B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TW	-	74LVC1G57FW4	CMOS-Log	Configurable multiple-function gate	DFN1010	80	Log36	9u	Di
TW	-	74LVC1G57FZ4	CMOS-Log	Configurable multiple-function gate	DFN1410	52	Log36	9u	Di
TW	-	74LVC1G98FW4	CMOS-Log	Configurable multiple-function gate	DFN1010	80	Log43	9u	Di
TW	-	RP130K301B	LVR-IC	LDO, LN, +CE, 3V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TW	-	RP152L045B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TX	-	74LVC1G58FW4	CMOS-Log	Configurable multiple-function gate	DFN1010	80	Log37	9u	Di
TX	-	74LVC1G58FZ4	CMOS-Log	Configurable multiple-function gate	DFN1410	52	Log37	9u	Di
TX	-	RP130K311B	LVR-IC	LDO, LN, +CE, 3.1V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TX	-	RP152L046B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TY	-	74LVC1G97FW4	CMOS-Log	Configurable multiple-function gate	DFN1010	80	Log41	9u	Di
TY	-	74LVC1G97FZ4	CMOS-Log	Configurable multiple-function gate	DFN1410	52	Log41	9u	Di
TY	-	RP130K321B	LVR-IC	LDO, LN, +CE, 3.2V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TY	-	RP152L047B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
TZ	-	RP130K331B	LVR-IC	LDO, LN, +CE, 3.3V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
TZ	-	RP152L048B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
u	-	BU29UA3WNVX	LVR-IC	LDO, 2.9V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
U	-	BAT62-02LS	Si-diode	Schottky, 40V, 20mA; Vf<1.0V, Cd<0.6pF	TSSLP-2-1	13d	-	2i	Inf
U0	-	R3117K373C	Vdet-IC	3.7V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
U0	-	RP152L049A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1%, 150mA, +CE	DFN1212-6	52x4	VR19	9a	Ric
U001	-	R5326K001B	LVR-IC	LDO, Dual out, V1=2V±1%, V2=2V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U002	-	R5326K002B	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=2.8V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U003	-	R5326K003B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=3V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U004	-	R5326K004B	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=3V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U005	-	R5326K005B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=2.5V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U006	-	R5326K006B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=3.3V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U007	-	R5326K007B	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=2.8V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U008	-	R5326K008B	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=1.2V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U009	-	R5326K009B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=1.6V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U010	-	R5326K010B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=2.8V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U011	-	R5326K011B	LVR-IC	LDO, Dual out, V1=3V±1%, V2=3V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U012	-	R5326K012B	LVR-IC	LDO, Dual out, V1=3.1V±1%, V2=3.1V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U013	-	R5326K013B	LVR-IC	LDO, Dual out, V1=2.7V±1%, V2=1.8V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U014	-	R5326K014B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=2.6V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U015	-	R5326K015B	LVR-IC	LDO, Dual out, V1=3.3V±1%, V2=3.3V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U016	-	R5326K016B	LVR-IC	LDO, Dual out, V1=2.85V±1%, V2=2.85V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U017	-	R5326K017B	LVR-IC	LDO, Dual out, V1=1.1V±1%, V2=1.1V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U018	-	R5326K018B	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=1.2V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U019	-	R5326K019B	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=2.9V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U020	-	R5326K020B	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=3.0V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U021	-	R5326K021B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=2.8V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U022	-	R5326K022B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=2.9V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U023	-	R5326K023B	LVR-IC	LDO, Dual out, V1=4.2V±1%, V2=3.1V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U024	-	R5326K024B	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=3.0V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U025	-	R5326K025B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=1.85V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U026	-	R5326K026B	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=2.85V±1%, 150mA, +CE, CL	DFN1820-6	74ri	VR19	9b	Ric
U0A	-	XC6118N10AGR-G	Vdet-IC	1.0V±30mV, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
U0B	-	XC6118N10BGR-G	Vdet-IC	1.0V±30mV, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
U0C	-	XC6118N10CGR-G	Vdet-IC	1.0V±30mV, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
U0D	-	XC6118N10DGR-G	Vdet-IC	1.0V±30mV, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
U1	-	R3117K383C	Vdet-IC	3.8V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
U15	-	MIC5247-1.5BML	LVR-IC	LDO, 1.5V±1%, 150mA, +CE	MLF-6	74ub	VR7	9m	Mcr
U15	mg	MIC5247-1.5BML	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, Pb-free	MLF-6	74ub	VR7	9m	Mcr
U16	-	MIC5247-1.6BML	LVR-IC	LDO, 1.6V±1%, 150mA, +CE	MLF-6	74ub	VR7	9m	Mcr
U16	mg	MIC5247-1.6BML	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, Pb-free	MLF-6	74ub	VR7	9m	Mcr
U18	-	MIC5247-1.8BML	LVR-IC	LDO, 1.8V±1%, 150mA, +CE	MLF-6	74ub	VR7	9m	Mcr
U18	mg	MIC5247-1.8BML	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, Pb-free	MLF-6	74ub	VR7	9m	Mcr
U1A	-	XC6118N11AGR-G	Vdet-IC	1.1V±30mV, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
U1B	-	XC6118N11BGR-G	Vdet-IC	1.1V±30mV, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
U1C	-	XC6118N11CGR-G	Vdet-IC	1.1V±30mV, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
U1D	-	XC6118N11DGR-G	Vdet-IC	1.1V±30mV, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
U1J	-	MIC5247-1.85BML	LVR-IC	LDO, 1.85V±1%, 150mA, +CE	MLF-6	74ub	VR7	9m	Mcr
U1J	mg	MIC5247-1.85BML	LVR-IC	LDO, 1.85V±1%, 150mA, +CE, Pb-free	MLF-6	74ub	VR7	9m	Mcr
U2	-	R3117K393C	Vdet-IC	3.9V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
U2	-	SN74AUC2G241YZP	CMOS-Log	Dual bus buffer non-inverted with 3-state output	BGA-8	50	Log60	9v	Ti
U2A	-	XC6118N12AGR-G	Vdet-IC	1.2V±30mV, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
U2B	-	XC6118N12BGR-G	Vdet-IC	1.2V±30mV, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
U2C	-	XC6118N12CGR-G	Vdet-IC	1.2V±30mV, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
U2D	-	XC6118N12DGR-G	Vdet-IC	1.2V±30mV, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
U3	-	R3117K403C	Vdet-IC	4.0V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
U3A	-	XC6118N13AGR-G	Vdet-IC	1.3V±30mV, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
U3B	-	XC6118N13BGR-G	Vdet-IC	1.3V±30mV, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
U3C	-	XC6118N13CGR-G	Vdet-IC	1.3V±30mV, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
U3D	-	XC6118N13DGR-G	Vdet-IC	1.3V±30mV, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
U4	-	BCR114L3	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k, 160MHz	TSLP-3	22ta	-	2a	Inf
U4	-	R3117K413C	Vdet-IC	4.1V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
U4A	-	XC6118N14AGR-G	Vdet-IC	1.4V±30mV, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
U4B	-	XC6118N14BGR-G	Vdet-IC	1.4V±30mV, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
U4C	-	XC6118N14CGR-G	Vdet-IC	1.4V±30mV, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
U4D	-	XC6118N14DGR-G	Vdet-IC	1.4V±30mV, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
U5	-	R3117K423C	Vdet-IC	4.2V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
U5A	-	XC6118N15AGR-G	Vdet-IC	1.5V±30mV, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
U5B	-	XC6118N15BGR-G	Vdet-IC	1.5V±30mV, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
U5C	-	XC6118N15CGR-G	Vdet-IC	1.5V±30mV, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
U5D	-	XC6118N15DGR-G	Vdet-IC	1.5V±30mV, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
U6	-	BCR164L3	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/10k, 160MHz	TSLP-3	22ta	-	2a	Inf
U6	-	R3117K433C	Vdet-IC	4.3V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
U6	-	SN74AUC2G66YZP	CMOS-Log	2-channel analog switch	BGA-8	50	Log68	9v	Ti
U6A	-	XC6118N16AGR-G	Vdet-IC	1.6V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
U6B	-	XC6118N16BGR-G	Vdet-IC	1.6V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
U6C	-	XC6118N16CGR-G	Vdet-IC	1.6V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
U6D	-	XC6118N16DGR-G	Vdet-IC	1.6V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
U7	-	ISL9016IRUCCZ	LVR-IC	LDO, Dual out, Vo1/Vo2=1.8V/1.8V±1.8%, 150mA, +CE	DFN-6	56g0	VR19	9a	Isl
U7	-	R3117K443C	Vdet-IC	4.4V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
U7	-	SN74AUC1G17YEA	CMOS-Log	Schmitt-trigger	BGA-5	46	Log11	9v	Ti
U7A	-	XC6118N17AGR-G	Vdet-IC	1.7V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
U7B	-	XC6118N17BGR-G	Vdet-IC	1.7V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
U7C	-	XC6118N17CGR-G	Vdet-IC	1.7V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
U7D	-	XC6118N17DGR-G	Vdet-IC	1.7V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
U8	-	R3117K453C	Vdet-IC	4.5V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
U8A	-	XC6118N18AGR-G	Vdet-IC	1.8V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
U8B	-	XC6118N18BGR-G	Vdet-IC	1.8V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
U8C	-	XC6118N18CGR-G	Vdet-IC	1.8V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
U8D	-	XC6118N18DGR-G	Vdet-IC	1.8V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
U9	-	R3117K463C	Vdet-IC	4.6V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
U9	-	SN74AUC2G34YZP	CMOS-Log	Dual non-inverter buffers	BGA-6	40	Log23	9v	Ti
U9A	-	XC6118N19AGR-G	Vdet-IC	1.9V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
U9B	-	XC6118N19BGR-G	Vdet-IC	1.9V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
U9C	-	XC6118N19CGR-G	Vdet-IC	1.9V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
U9D	-	XC6118N19DGR-G	Vdet-IC	1.9V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
UA	-	BCR149L3	Si-npn-Digi	Sw, 50V, 70mA, 250mW, R1=47k, 150MHz	TSLP-3	22ta	-	2a	Inf
UA	-	RP130K341B	LVR-IC	LDO, LN, +CE, 3.4V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
UA	-	RP152L001C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UA	-	SN74AUC1G00YZP	CMOS-Log	2-input NAND gate	BGA-5	46	Log1	9v	Ti
UA	-	SN74AUC2G00YZP	CMOS-Log	Dual 2-input NAND gates	BGA-8	50	Log50	9v	Ti
UA216	-	XC6124A216ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA217	-	XC6124A217ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UA218	-	XC6124A218ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA219	-	XC6124A219ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA220	-	XC6124A220ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA221	-	XC6124A221ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA222	-	XC6124A222ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA223	-	XC6124A223ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA224	-	XC6124A224ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA225	-	XC6124A225ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA226	-	XC6124A226ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA227	-	XC6124A227ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA228	-	XC6124A228ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA229	-	XC6124A229ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA230	-	XC6124A230ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA231	-	XC6124A231ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA232	-	XC6124A232ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA233	-	XC6124A233ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA234	-	XC6124A234ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA235	-	XC6124A235ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA236	-	XC6124A236ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA237	-	XC6124A237ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA238	-	XC6124A238ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA239	-	XC6124A239ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA240	-	XC6124A240ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA241	-	XC6124A241ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA242	-	XC6124A242ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA243	-	XC6124A243ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA244	-	XC6124A244ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA245	-	XC6124A245ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA246	-	XC6124A246ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA247	-	XC6124A247ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA248	-	XC6124A248ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA249	-	XC6124A249ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA250	-	XC6124A250ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA316	-	XC6124A316ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA317	-	XC6124A317ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA318	-	XC6124A318ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA319	-	XC6124A319ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA320	-	XC6124A320ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA321	-	XC6124A321ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA322	-	XC6124A322ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA323	-	XC6124A323ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA324	-	XC6124A324ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA325	-	XC6124A325ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA326	-	XC6124A326ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA327	-	XC6124A327ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA328	-	XC6124A328ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA329	-	XC6124A329ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA330	-	XC6124A330ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA331	-	XC6124A331ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA332	-	XC6124A332ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA333	-	XC6124A333ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA334	-	XC6124A334ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA335	-	XC6124A335ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA336	-	XC6124A336ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA337	-	XC6124A337ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA338	-	XC6124A338ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA339	-	XC6124A339ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA340	-	XC6124A340ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA341	-	XC6124A341ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA342	-	XC6124A342ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA343	-	XC6124A343ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA344	-	XC6124A344ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA345	-	XC6124A345ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA346	-	XC6124A346ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA347	-	XC6124A347ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA348	-	XC6124A348ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA349	-	XC6124A349ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA350	-	XC6124A350ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA416	-	XC6124A416ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA417	-	XC6124A417ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UA418	-	XC6124A418ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA419	-	XC6124A419ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA420	-	XC6124A420ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA421	-	XC6124A421ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA422	-	XC6124A422ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA423	-	XC6124A423ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA424	-	XC6124A424ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA425	-	XC6124A425ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA426	-	XC6124A426ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA427	-	XC6124A427ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA428	-	XC6124A428ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA429	-	XC6124A429ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA430	-	XC6124A430ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA431	-	XC6124A431ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA432	-	XC6124A432ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA433	-	XC6124A433ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA434	-	XC6124A434ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA435	-	XC6124A435ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA436	-	XC6124A436ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA437	-	XC6124A437ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA438	-	XC6124A438ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA439	-	XC6124A439ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA440	-	XC6124A440ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA441	-	XC6124A441ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA442	-	XC6124A442ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA443	-	XC6124A443ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA444	-	XC6124A444ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA445	-	XC6124A445ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA446	-	XC6124A446ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA447	-	XC6124A447ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA448	-	XC6124A448ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA449	-	XC6124A449ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA450	-	XC6124A450ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA516	-	XC6124A516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA517	-	XC6124A517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA518	-	XC6124A518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA519	-	XC6124A519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA520	-	XC6124A520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA521	-	XC6124A521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA522	-	XC6124A522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA523	-	XC6124A523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA524	-	XC6124A524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA525	-	XC6124A525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA526	-	XC6124A526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA527	-	XC6124A527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA528	-	XC6124A528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA529	-	XC6124A529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA530	-	XC6124A530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA531	-	XC6124A531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA532	-	XC6124A532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA533	-	XC6124A533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA534	-	XC6124A534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA535	-	XC6124A535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA536	-	XC6124A536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA537	-	XC6124A537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA538	-	XC6124A538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA539	-	XC6124A539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA540	-	XC6124A540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA541	-	XC6124A541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA542	-	XC6124A542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA543	-	XC6124A543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA544	-	XC6124A544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA545	-	XC6124A545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA546	-	XC6124A546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA547	-	XC6124A547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA548	-	XC6124A548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA549	-	XC6124A549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA550	-	XC6124A550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA616	-	XC6124A616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA617	-	XC6124A617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UA618	-	XC6124A618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA619	-	XC6124A619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA620	-	XC6124A620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA621	-	XC6124A621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA622	-	XC6124A622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA623	-	XC6124A623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA624	-	XC6124A624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA625	-	XC6124A625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA626	-	XC6124A626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA627	-	XC6124A627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA628	-	XC6124A628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA629	-	XC6124A629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA630	-	XC6124A630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA631	-	XC6124A631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA632	-	XC6124A632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA633	-	XC6124A633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA634	-	XC6124A634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA635	-	XC6124A635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA636	-	XC6124A636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA637	-	XC6124A637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA638	-	XC6124A638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA639	-	XC6124A639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA640	-	XC6124A640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA641	-	XC6124A641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA642	-	XC6124A642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA643	-	XC6124A643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA644	-	XC6124A644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA645	-	XC6124A645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA646	-	XC6124A646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA647	-	XC6124A647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA648	-	XC6124A648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA649	-	XC6124A649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA650	-	XC6124A650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA716	-	XC6124A716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA717	-	XC6124A717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA718	-	XC6124A718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA719	-	XC6124A719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA720	-	XC6124A720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA721	-	XC6124A721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA722	-	XC6124A722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA723	-	XC6124A723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA724	-	XC6124A724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA725	-	XC6124A725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA726	-	XC6124A726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA727	-	XC6124A727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA728	-	XC6124A728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA729	-	XC6124A729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA730	-	XC6124A730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA731	-	XC6124A731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA732	-	XC6124A732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA733	-	XC6124A733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA734	-	XC6124A734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA735	-	XC6124A735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA736	-	XC6124A736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA737	-	XC6124A737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA738	-	XC6124A738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA739	-	XC6124A739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA740	-	XC6124A740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA741	-	XC6124A741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA742	-	XC6124A742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA743	-	XC6124A743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA744	-	XC6124A744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA745	-	XC6124A745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA746	-	XC6124A746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA747	-	XC6124A747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA748	-	XC6124A748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA749	-	XC6124A749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UA750	-	XC6124A750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=3.13ms	USP-6C	49gv	VD23	9b	Tor
UAA	-	XC6604A051ER-G	LVR-IC	LDO, 0.5V±15mV, 1A, +CE, soft start	USP-6C	49ax	VR11a	9b	Tor
UAB	-	XC6604A061ER-G	LVR-IC	LDO, 0.6V±15mV, 1A, +CE, soft start	USP-6C	49ax	VR11a	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UAC	-	XC6604A071ER-G	LVR-IC	LDO, 0.7V±15mV, 1A, +CE, soft start	USP-6C	49ax	VR11a	9b	Tor
UAD	-	XC6604A081ER-G	LVR-IC	LDO, 0.8V±15mV, 1A, +CE, soft start	USP-6C	49ax	VR11a	9b	Tor
UAE	-	XC6604A091ER-G	LVR-IC	LDO, 0.9V±15mV, 1A, +CE, soft start	USP-6C	49ax	VR11a	9b	Tor
UAF	-	XC6604A101ER-G	LVR-IC	LDO, 1.0V±15mV, 1A, +CE, soft start	USP-6C	49ax	VR11a	9b	Tor
UAH	-	XC6604A111ER-G	LVR-IC	LDO, 1.1V±15mV, 1A, +CE, soft start	USP-6C	49ax	VR11a	9b	Tor
UAK	-	XC6604A121ER-G	LVR-IC	LDO, 1.2V±15mV, 1A, +CE, soft start	USP-6C	49ax	VR11a	9b	Tor
UAL	-	XC6604A131ER-G	LVR-IC	LDO, 1.3V±20mV, 1A, +CE, soft start	USP-6C	49ax	VR11a	9b	Tor
UAM	-	XC6604A141ER-G	LVR-IC	LDO, 1.4V±20mV, 1A, +CE, soft start	USP-6C	49ax	VR11a	9b	Tor
UAN	-	XC6604A151ER-G	LVR-IC	LDO, 1.5V±20mV, 1A, +CE, soft start	USP-6C	49ax	VR11a	9b	Tor
UAP	-	XC6604A161ER-G	LVR-IC	LDO, 1.6V±20mV, 1A, +CE, soft start	USP-6C	49ax	VR11a	9b	Tor
UAR	-	XC6604A171ER-G	LVR-IC	LDO, 1.7V±20mV, 1A, +CE, soft start	USP-6C	49ax	VR11a	9b	Tor
UAS	-	XC6604A191ER-G	LVR-IC	LDO, 1.8V±20mV, 1A, +CE, soft start	USP-6C	49ax	VR11a	9b	Tor
UB	-	BCR199L3	Si-pnp-Digi	Sw, 50V, 70mA, 250mW, R1=47k, 150MHz	TSLP-3	22ta	-	2a	Inf
UB	-	RP130K351B	LVR-IC	LDO, LN, +CE, 3.5V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
UB	-	RP152L002C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UB	-	SN74AUC2G02YZP	CMOS-Log	Dual 2-input NOR gates	BGA-8	50	Log53	9v	Ti
UBA	-	XC6604B051ER-G	LVR-IC	LDO, 0.5V±15mV, 1A, +CE	USP-6C	49ax	VR11a	9b	Tor
UBB	-	XC6604B061ER-G	LVR-IC	LDO, 0.6V±15mV, 1A, +CE	USP-6C	49ax	VR11a	9b	Tor
UBC	-	XC6604B071ER-G	LVR-IC	LDO, 0.7V±15mV, 1A, +CE	USP-6C	49ax	VR11a	9b	Tor
UBD	-	XC6604B081ER-G	LVR-IC	LDO, 0.8V±15mV, 1A, +CE	USP-6C	49ax	VR11a	9b	Tor
UBE	-	XC6604B091ER-G	LVR-IC	LDO, 0.9V±15mV, 1A, +CE	USP-6C	49ax	VR11a	9b	Tor
UBF	-	XC6604B101ER-G	LVR-IC	LDO, 1.0V±15mV, 1A, +CE	USP-6C	49ax	VR11a	9b	Tor
UBH	-	XC6604B111ER-G	LVR-IC	LDO, 1.1V±15mV, 1A, +CE	USP-6C	49ax	VR11a	9b	Tor
UBK	-	XC6604B121ER-G	LVR-IC	LDO, 1.2V±15mV, 1A, +CE	USP-6C	49ax	VR11a	9b	Tor
UBL	-	XC6604B131ER-G	LVR-IC	LDO, 1.3V±20mV, 1A, +CE	USP-6C	49ax	VR11a	9b	Tor
UBM	-	XC6604B141ER-G	LVR-IC	LDO, 1.4V±20mV, 1A, +CE	USP-6C	49ax	VR11a	9b	Tor
UBN	-	XC6604B151ER-G	LVR-IC	LDO, 1.5V±20mV, 1A, +CE	USP-6C	49ax	VR11a	9b	Tor
UBP	-	XC6604B161ER-G	LVR-IC	LDO, 1.6V±20mV, 1A, +CE	USP-6C	49ax	VR11a	9b	Tor
UBR	-	XC6604B171ER-G	LVR-IC	LDO, 1.7V±20mV, 1A, +CE	USP-6C	49ax	VR11a	9b	Tor
UBS	-	XC6604B191ER-G	LVR-IC	LDO, 1.8V±20mV, 1A, +CE	USP-6C	49ax	VR11a	9b	Tor
UC	-	BCR101L3	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k, 100MHz	TSLP-3	22ta	-	2a	Inf
UC	-	RP130K361B	LVR-IC	LDO, LN, +CE, 3.6V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
UC	-	RP152L003C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UC	-	SN74AUC2G04YEP	CMOS-Log	Dual inverters	BGA-6	40	Log24	9v	Ti
UC216	-	XC6124C216ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC217	-	XC6124C217ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC218	-	XC6124C218ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC219	-	XC6124C219ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC220	-	XC6124C220ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC221	-	XC6124C221ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC222	-	XC6124C222ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC223	-	XC6124C223ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC224	-	XC6124C224ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC225	-	XC6124C225ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC226	-	XC6124C226ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC227	-	XC6124C227ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC228	-	XC6124C228ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC229	-	XC6124C229ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC230	-	XC6124C230ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC231	-	XC6124C231ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC232	-	XC6124C232ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC233	-	XC6124C233ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC234	-	XC6124C234ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC235	-	XC6124C235ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC236	-	XC6124C236ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC237	-	XC6124C237ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC238	-	XC6124C238ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC239	-	XC6124C239ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC240	-	XC6124C240ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC241	-	XC6124C241ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC242	-	XC6124C242ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC243	-	XC6124C243ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC244	-	XC6124C244ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC245	-	XC6124C245ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC246	-	XC6124C246ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC247	-	XC6124C247ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC248	-	XC6124C248ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC249	-	XC6124C249ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC250	-	XC6124C250ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=50ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC316	-	XC6124C316ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UC317	-	XC6124C317ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC318	-	XC6124C318ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC319	-	XC6124C319ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC320	-	XC6124C320ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC321	-	XC6124C321ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC322	-	XC6124C322ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC323	-	XC6124C323ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC324	-	XC6124C324ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC325	-	XC6124C325ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC326	-	XC6124C326ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC327	-	XC6124C327ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC328	-	XC6124C328ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC329	-	XC6124C329ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC330	-	XC6124C330ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC331	-	XC6124C331ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC332	-	XC6124C332ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC333	-	XC6124C333ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC334	-	XC6124C334ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC335	-	XC6124C335ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC336	-	XC6124C336ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC337	-	XC6124C337ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC338	-	XC6124C338ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC339	-	XC6124C339ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC340	-	XC6124C340ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC341	-	XC6124C341ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC342	-	XC6124C342ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC343	-	XC6124C343ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC344	-	XC6124C344ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC345	-	XC6124C345ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC346	-	XC6124C346ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC347	-	XC6124C347ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC348	-	XC6124C348ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC349	-	XC6124C349ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC350	-	XC6124C350ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC416	-	XC6124C416ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC417	-	XC6124C417ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC418	-	XC6124C418ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC419	-	XC6124C419ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC420	-	XC6124C420ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC421	-	XC6124C421ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC422	-	XC6124C422ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC423	-	XC6124C423ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC424	-	XC6124C424ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC425	-	XC6124C425ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC426	-	XC6124C426ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC427	-	XC6124C427ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC428	-	XC6124C428ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC429	-	XC6124C429ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC430	-	XC6124C430ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC431	-	XC6124C431ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC432	-	XC6124C432ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC433	-	XC6124C433ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC434	-	XC6124C434ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC435	-	XC6124C435ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC436	-	XC6124C436ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC437	-	XC6124C437ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC438	-	XC6124C438ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC439	-	XC6124C439ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC440	-	XC6124C440ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC441	-	XC6124C441ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC442	-	XC6124C442ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC443	-	XC6124C443ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC444	-	XC6124C444ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC445	-	XC6124C445ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC446	-	XC6124C446ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC447	-	XC6124C447ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC448	-	XC6124C448ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC449	-	XC6124C449ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC450	-	XC6124C450ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC516	-	XC6124C516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UC517	-	XC6124C517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC518	-	XC6124C518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC519	-	XC6124C519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC520	-	XC6124C520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC521	-	XC6124C521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC522	-	XC6124C522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC523	-	XC6124C523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC524	-	XC6124C524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC525	-	XC6124C525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC526	-	XC6124C526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC527	-	XC6124C527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC528	-	XC6124C528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC529	-	XC6124C529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC530	-	XC6124C530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC531	-	XC6124C531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC532	-	XC6124C532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC533	-	XC6124C533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC534	-	XC6124C534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC535	-	XC6124C535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC536	-	XC6124C536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC537	-	XC6124C537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC538	-	XC6124C538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC539	-	XC6124C539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC540	-	XC6124C540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC541	-	XC6124C541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC542	-	XC6124C542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC543	-	XC6124C543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC544	-	XC6124C544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC545	-	XC6124C545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC546	-	XC6124C546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC547	-	XC6124C547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC548	-	XC6124C548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC549	-	XC6124C549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC550	-	XC6124C550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC616	-	XC6124C616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC617	-	XC6124C617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC618	-	XC6124C618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC619	-	XC6124C619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC620	-	XC6124C620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC621	-	XC6124C621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC622	-	XC6124C622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC623	-	XC6124C623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC624	-	XC6124C624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC625	-	XC6124C625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC626	-	XC6124C626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC627	-	XC6124C627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC628	-	XC6124C628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC629	-	XC6124C629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC630	-	XC6124C630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC631	-	XC6124C631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC632	-	XC6124C632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC633	-	XC6124C633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC634	-	XC6124C634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC635	-	XC6124C635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC636	-	XC6124C636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC637	-	XC6124C637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC638	-	XC6124C638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC639	-	XC6124C639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC640	-	XC6124C640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC641	-	XC6124C641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC642	-	XC6124C642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC643	-	XC6124C643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC644	-	XC6124C644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC645	-	XC6124C645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC646	-	XC6124C646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC647	-	XC6124C647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC648	-	XC6124C648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC649	-	XC6124C649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC650	-	XC6124C650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC70	-	XC6124C720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UC716	-	XC6124C716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC717	-	XC6124C717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC718	-	XC6124C718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC719	-	XC6124C719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC721	-	XC6124C721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC722	-	XC6124C722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC723	-	XC6124C723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC724	-	XC6124C724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC725	-	XC6124C725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC726	-	XC6124C726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC727	-	XC6124C727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC728	-	XC6124C728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC729	-	XC6124C729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC730	-	XC6124C730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC731	-	XC6124C731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC732	-	XC6124C732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC733	-	XC6124C733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC734	-	XC6124C734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC735	-	XC6124C735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC736	-	XC6124C736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC737	-	XC6124C737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC738	-	XC6124C738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC739	-	XC6124C739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC740	-	XC6124C740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC741	-	XC6124C741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC742	-	XC6124C742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC743	-	XC6124C743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC744	-	XC6124C744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC745	-	XC6124C745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC746	-	XC6124C746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC747	-	XC6124C747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC748	-	XC6124C748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC749	-	XC6124C749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UC750	-	XC6124C750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=50ms	USP-6C	49gv	VD23	9b	Tor
UD	-	BCR151L3	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=100k/100k, 120MHz	TSLP-3	22ta	-	2a	Inf
UD	-	RP130K371B	LVR-IC	LDO, LN, +CE, 3.7V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
UD	-	RP152L004C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UD	-	SN74AUC2GU04YZP	CMOS-Log	Dual inverters	BGA-6	40	Log24	9v	Ti
UD316	-	XC6124D316ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD317	-	XC6124D317ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD318	-	XC6124D318ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD319	-	XC6124D319ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD320	-	XC6124D320ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD321	-	XC6124D321ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD322	-	XC6124D322ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD323	-	XC6124D323ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD324	-	XC6124D324ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD325	-	XC6124D325ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD326	-	XC6124D326ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD327	-	XC6124D327ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD328	-	XC6124D328ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD329	-	XC6124D329ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD330	-	XC6124D330ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD331	-	XC6124D331ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD332	-	XC6124D332ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD333	-	XC6124D333ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD334	-	XC6124D334ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD335	-	XC6124D335ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD336	-	XC6124D336ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD337	-	XC6124D337ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD338	-	XC6124D338ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD339	-	XC6124D339ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD340	-	XC6124D340ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD341	-	XC6124D341ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD342	-	XC6124D342ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD343	-	XC6124D343ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD344	-	XC6124D344ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD345	-	XC6124D345ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD346	-	XC6124D346ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD347	-	XC6124D347ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UD348	-	XC6124D348ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD349	-	XC6124D349ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD350	-	XC6124D350ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=100ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD416	-	XC6124D416ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD417	-	XC6124D417ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD418	-	XC6124D418ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD419	-	XC6124D419ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD420	-	XC6124D420ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD421	-	XC6124D421ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD422	-	XC6124D422ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD423	-	XC6124D423ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD424	-	XC6124D424ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD425	-	XC6124D425ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD426	-	XC6124D426ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD427	-	XC6124D427ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD428	-	XC6124D428ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD429	-	XC6124D429ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD430	-	XC6124D430ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD431	-	XC6124D431ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD432	-	XC6124D432ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD433	-	XC6124D433ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD434	-	XC6124D434ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD435	-	XC6124D435ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD436	-	XC6124D436ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD437	-	XC6124D437ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD438	-	XC6124D438ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD439	-	XC6124D439ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD440	-	XC6124D440ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD441	-	XC6124D441ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD442	-	XC6124D442ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD443	-	XC6124D443ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD444	-	XC6124D444ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD445	-	XC6124D445ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD446	-	XC6124D446ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD447	-	XC6124D447ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD448	-	XC6124D448ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD449	-	XC6124D449ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD450	-	XC6124D450ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD516	-	XC6124D516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD517	-	XC6124D517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD518	-	XC6124D518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD519	-	XC6124D519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD520	-	XC6124D520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD521	-	XC6124D521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD522	-	XC6124D522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD523	-	XC6124D523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD524	-	XC6124D524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD525	-	XC6124D525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD527	-	XC6124D527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD528	-	XC6124D528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD529	-	XC6124D529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD530	-	XC6124D530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD531	-	XC6124D531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD532	-	XC6124D532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD533	-	XC6124D533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD534	-	XC6124D534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD535	-	XC6124D535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD536	-	XC6124D536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD537	-	XC6124D537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD538	-	XC6124D538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD539	-	XC6124D539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD540	-	XC6124D540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD541	-	XC6124D541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD542	-	XC6124D542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD543	-	XC6124D543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD544	-	XC6124D544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD545	-	XC6124D545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD546	-	XC6124D546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD547	-	XC6124D547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD548	-	XC6124D548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UD549	-	XC6124D549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD550	-	XC6124D550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD56	-	XC6124D526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD616	-	XC6124D616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD617	-	XC6124D617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD618	-	XC6124D618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD619	-	XC6124D619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD620	-	XC6124D620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD621	-	XC6124D621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD622	-	XC6124D622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD623	-	XC6124D623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD624	-	XC6124D624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD625	-	XC6124D625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD626	-	XC6124D626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD627	-	XC6124D627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD628	-	XC6124D628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD629	-	XC6124D629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD630	-	XC6124D630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD631	-	XC6124D631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD632	-	XC6124D632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD633	-	XC6124D633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD634	-	XC6124D634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD635	-	XC6124D635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD636	-	XC6124D636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD637	-	XC6124D637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD638	-	XC6124D638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD639	-	XC6124D639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD640	-	XC6124D640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD641	-	XC6124D641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD642	-	XC6124D642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD643	-	XC6124D643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD644	-	XC6124D644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD645	-	XC6124D645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD646	-	XC6124D646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD647	-	XC6124D647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD648	-	XC6124D648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD649	-	XC6124D649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD650	-	XC6124D650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD716	-	XC6124D716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD717	-	XC6124D717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD718	-	XC6124D718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD719	-	XC6124D719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD720	-	XC6124D720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD721	-	XC6124D721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD722	-	XC6124D722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD723	-	XC6124D723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD724	-	XC6124D724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD725	-	XC6124D725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD726	-	XC6124D726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD727	-	XC6124D727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD728	-	XC6124D728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD729	-	XC6124D729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD730	-	XC6124D730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD731	-	XC6124D731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD732	-	XC6124D732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD733	-	XC6124D733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD734	-	XC6124D734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD735	-	XC6124D735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD736	-	XC6124D736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD737	-	XC6124D737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD738	-	XC6124D738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD739	-	XC6124D739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD740	-	XC6124D740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD741	-	XC6124D741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD742	-	XC6124D742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD743	-	XC6124D743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD744	-	XC6124D744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD745	-	XC6124D745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD746	-	XC6124D746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD747	-	XC6124D747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UD748	-	XC6124D748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD749	-	XC6124D749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UD750	-	XC6124D750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=100ms	USP-6C	49gv	VD23	9b	Tor
UE	-	RP130K381B	LVR-IC	LDO, LN, +CE, 3.8V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
UE	-	RP152L005C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.2V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UE	-	SN74AUC2G08YZP	CMOS-Log	Dual 2-input AND gates	BGA-8	50	Log51	9v	Ti
UE416	-	XC6124E416ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE417	-	XC6124E417ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE418	-	XC6124E418ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE419	-	XC6124E419ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE420	-	XC6124E420ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE421	-	XC6124E421ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE422	-	XC6124E422ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE423	-	XC6124E423ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE424	-	XC6124E424ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE425	-	XC6124E425ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE426	-	XC6124E426ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE427	-	XC6124E427ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE428	-	XC6124E428ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE429	-	XC6124E429ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE430	-	XC6124E430ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE431	-	XC6124E431ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE432	-	XC6124E432ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE433	-	XC6124E433ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE434	-	XC6124E434ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE435	-	XC6124E435ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE436	-	XC6124E436ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE437	-	XC6124E437ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE438	-	XC6124E438ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE439	-	XC6124E439ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE440	-	XC6124E440ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE441	-	XC6124E441ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE442	-	XC6124E442ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE443	-	XC6124E443ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE444	-	XC6124E444ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE445	-	XC6124E445ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE446	-	XC6124E446ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE447	-	XC6124E447ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE448	-	XC6124E448ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE449	-	XC6124E449ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE450	-	XC6124E450ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=200ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE516	-	XC6124E516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE517	-	XC6124E517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE518	-	XC6124E518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE519	-	XC6124E519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE520	-	XC6124E520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE521	-	XC6124E521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE522	-	XC6124E522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE523	-	XC6124E523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE524	-	XC6124E524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE525	-	XC6124E525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE526	-	XC6124E526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE527	-	XC6124E527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE528	-	XC6124E528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE529	-	XC6124E529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE530	-	XC6124E530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE531	-	XC6124E531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE532	-	XC6124E532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE533	-	XC6124E533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE534	-	XC6124E534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE535	-	XC6124E535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE536	-	XC6124E536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE537	-	XC6124E537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE538	-	XC6124E538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE539	-	XC6124E539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE540	-	XC6124E540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE541	-	XC6124E541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE542	-	XC6124E542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE543	-	XC6124E543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE544	-	XC6124E544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UE545	-	XC6124E545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE546	-	XC6124E546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE547	-	XC6124E547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE548	-	XC6124E548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE549	-	XC6124E549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE550	-	XC6124E550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE616	-	XC6124E616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE617	-	XC6124E617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE618	-	XC6124E618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE619	-	XC6124E619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE620	-	XC6124E620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE621	-	XC6124E621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE622	-	XC6124E622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE623	-	XC6124E623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE624	-	XC6124E624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE625	-	XC6124E625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE626	-	XC6124E626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE627	-	XC6124E627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE628	-	XC6124E628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE629	-	XC6124E629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE630	-	XC6124E630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE631	-	XC6124E631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE632	-	XC6124E632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE633	-	XC6124E633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE634	-	XC6124E634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE635	-	XC6124E635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE636	-	XC6124E636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE637	-	XC6124E637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE638	-	XC6124E638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE639	-	XC6124E639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE640	-	XC6124E640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE641	-	XC6124E641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE642	-	XC6124E642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE643	-	XC6124E643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE644	-	XC6124E644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE645	-	XC6124E645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE646	-	XC6124E646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE647	-	XC6124E647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE648	-	XC6124E648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE649	-	XC6124E649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE650	-	XC6124E650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE716	-	XC6124E716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE717	-	XC6124E717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE718	-	XC6124E718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE719	-	XC6124E719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE720	-	XC6124E720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE721	-	XC6124E721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE722	-	XC6124E722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE723	-	XC6124E723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE724	-	XC6124E724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE725	-	XC6124E725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE726	-	XC6124E726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE727	-	XC6124E727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE728	-	XC6124E728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE729	-	XC6124E729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE730	-	XC6124E730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE731	-	XC6124E731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE732	-	XC6124E732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE733	-	XC6124E733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE734	-	XC6124E734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE735	-	XC6124E735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE736	-	XC6124E736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE737	-	XC6124E737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE738	-	XC6124E738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE739	-	XC6124E739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE740	-	XC6124E740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE741	-	XC6124E741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE742	-	XC6124E742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE743	-	XC6124E743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE744	-	XC6124E744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UE745	-	XC6124E745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE746	-	XC6124E746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE747	-	XC6124E747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE748	-	XC6124E748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE749	-	XC6124E749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UE750	-	XC6124E750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=200ms	USP-6C	49gv	VD23	9b	Tor
UF	-	RP130K391B	LVR-IC	LDO, LN, +CE, 3.9V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
UF	-	RP152L006C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/1.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UF	-	SN74AUC1G14YZP	CMOS-Log	Inverting Schmitt-trigger	BGA-5	46	Log7	9v	Ti
UF516	-	XC6124F516ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF517	-	XC6124F517ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF518	-	XC6124F518ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF519	-	XC6124F519ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF520	-	XC6124F520ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF521	-	XC6124F521ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF522	-	XC6124F522ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF523	-	XC6124F523ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF524	-	XC6124F524ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF525	-	XC6124F525ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF526	-	XC6124F526ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF527	-	XC6124F527ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF528	-	XC6124F528ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF529	-	XC6124F529ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF530	-	XC6124F530ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF531	-	XC6124F531ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF532	-	XC6124F532ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF533	-	XC6124F533ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF534	-	XC6124F534ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF535	-	XC6124F535ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF536	-	XC6124F536ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF537	-	XC6124F537ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF538	-	XC6124F538ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF539	-	XC6124F539ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF540	-	XC6124F540ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF541	-	XC6124F541ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF542	-	XC6124F542ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF543	-	XC6124F543ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF544	-	XC6124F544ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF545	-	XC6124F545ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF546	-	XC6124F546ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF547	-	XC6124F547ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF548	-	XC6124F548ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF549	-	XC6124F549ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF550	-	XC6124F550ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=400ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF616	-	XC6124F616ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF617	-	XC6124F617ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF618	-	XC6124F618ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF619	-	XC6124F619ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF620	-	XC6124F620ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF621	-	XC6124F621ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF622	-	XC6124F622ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF623	-	XC6124F623ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF624	-	XC6124F624ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF625	-	XC6124F625ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF626	-	XC6124F626ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF627	-	XC6124F627ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF628	-	XC6124F628ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF629	-	XC6124F629ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF630	-	XC6124F630ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF631	-	XC6124F631ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF632	-	XC6124F632ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF633	-	XC6124F633ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF634	-	XC6124F634ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF635	-	XC6124F635ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF636	-	XC6124F636ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF637	-	XC6124F637ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF638	-	XC6124F638ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	Sch	9b	Tor
UF639	-	XC6124F639ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF640	-	XC6124F640ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF641	-	XC6124F641ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UF642	-	XC6124F642ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF643	-	XC6124F643ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF644	-	XC6124F644ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF645	-	XC6124F645ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF646	-	XC6124F646ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF647	-	XC6124F647ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF648	-	XC6124F648ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF649	-	XC6124F649ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF650	-	XC6124F650ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=1.6s, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF716	-	XC6124F716ER-G	Vdet-IC	1.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF717	-	XC6124F717ER-G	Vdet-IC	1.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF718	-	XC6124F718ER-G	Vdet-IC	1.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF719	-	XC6124F719ER-G	Vdet-IC	1.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF720	-	XC6124F720ER-G	Vdet-IC	2.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF721	-	XC6124F721ER-G	Vdet-IC	2.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF722	-	XC6124F722ER-G	Vdet-IC	2.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF723	-	XC6124F723ER-G	Vdet-IC	2.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF724	-	XC6124F724ER-G	Vdet-IC	2.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF725	-	XC6124F725ER-G	Vdet-IC	2.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF726	-	XC6124F726ER-G	Vdet-IC	2.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF727	-	XC6124F727ER-G	Vdet-IC	2.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF728	-	XC6124F728ER-G	Vdet-IC	2.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF729	-	XC6124F729ER-G	Vdet-IC	2.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF730	-	XC6124F730ER-G	Vdet-IC	3.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF731	-	XC6124F731ER-G	Vdet-IC	3.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF732	-	XC6124F732ER-G	Vdet-IC	3.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF733	-	XC6124F733ER-G	Vdet-IC	3.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF734	-	XC6124F734ER-G	Vdet-IC	3.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF735	-	XC6124F735ER-G	Vdet-IC	3.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF736	-	XC6124F736ER-G	Vdet-IC	3.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF737	-	XC6124F737ER-G	Vdet-IC	3.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF738	-	XC6124F738ER-G	Vdet-IC	3.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF739	-	XC6124F739ER-G	Vdet-IC	3.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF740	-	XC6124F740ER-G	Vdet-IC	4.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF741	-	XC6124F741ER-G	Vdet-IC	4.1V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF742	-	XC6124F742ER-G	Vdet-IC	4.2V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF743	-	XC6124F743ER-G	Vdet-IC	4.3V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF744	-	XC6124F744ER-G	Vdet-IC	4.4V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF745	-	XC6124F745ER-G	Vdet-IC	4.5V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF746	-	XC6124F746ER-G	Vdet-IC	4.6V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF747	-	XC6124F747ER-G	Vdet-IC	4.7V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF748	-	XC6124F748ER-G	Vdet-IC	4.8V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF749	-	XC6124F749ER-G	Vdet-IC	4.9V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UF750	-	XC6124F750ER-G	Vdet-IC	5.0V±2%, -Reset ODO, -WDEN, PDR, Wt=800ms, Rt=400ms	USP-6C	49gv	VD23	9b	Tor
UG	-	RP130K401B	LVR-IC	LDO, LN, +CE, 4V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
UG	-	RP152L007C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.85V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UG	-	SN74AUC1G32YZP	CMOS-Log	2-input OR gate	BGA-5	46	Log4	9v	Ti
UG	-	SN74AUC2G32YZP	CMOS-Log	Dual 2-input OR gates	BGA-8	50	Log52	9v	Ti
UH	-	RP130K411B	LVR-IC	LDO, LN, +CE, 4.1V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
UH	-	RP152L008C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.85V/2.6V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UH	-	SN74AUC2G86YZP	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	BGA-8	50	Log65	9v	Ti
UI	-	BU1BUA3WNVX	LVR-IC	LDO, 1.15V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
UJ	-	RP130K421B	LVR-IC	LDO, LN, +CE, 4.2V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
UJ	-	RP152L009C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UK	-	RP130K431B	LVR-IC	LDO, LN, +CE, 4.3V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
UK	-	RP152L010C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/1.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UK	-	SN74AUC1G240YZP	CMOS-Log	Bus buffer inverted with 3–state output	BGA-5	46	Log22	9v	Ti
UK	-	SN74AUC2G240YZP	CMOS-Log	Dual bus buffer inverted with 3-state output	BGA-8	50	Log67	9v	Ti
ul	-	BU27UA3WNVX	LVR-IC	LDO, 2.7V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
UL	-	RP130K441B	LVR-IC	LDO, LN, +CE, 4.4V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
UL	-	RP152L011C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.5V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UM	-	74LVC1G06FZ4	CMOS-Log	Inverter (ODO)	DFN1410	52	Log19	9u	Di
UM	-	RP130K451B	LVR-IC	LDO, LN, +CE, 4.5V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
UM	-	RP152L012C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.6V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UM	-	SN74AUC1G125YEA	CMOS-Log	Bus buffer gate with 3-state output	BGA-5	46	Log14	9v	Ti
UM	-	SN74AUC2G125YZP	CMOS-Log	Dual bus buffer with 3-state output	BGA-8	50	Log54	9v	Ti
UN	-	74LVC1G07FZ4	CMOS-Log	Noninverting buffer/driver (ODO)	DFN1410	52	Log8	9u	Di
UN	-	RP130K461B	LVR-IC	LDO, LN, +CE, 4.6V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
UN	-	RP152L013C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UN	-	SN74AUC1G126YZP	CMOS-Log	Bus buffer gate with 3-state output	BGA-5	46	Log13	9v	Ti

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
UN	-	SN74AUC2G126YZP	CMOS-Log	Bus buffer gate with 3-state output	BGA-8	50	Log13	9v	Ti
UP	-	74LVC1G14FW4	CMOS-Log	Inverting Schmitt-trigger	DFN1010	80	Log7	9u	Di
UP	-	74LVC1G14FZ4	CMOS-Log	Inverting Schmitt-trigger	DFN1410	52	Log7	9u	Di
UP	-	RP130K471B	LVR-IC	LDO, LN, +CE, 4.7V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
UP	-	RP152L014C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.3V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UP	-	SN74AUP1G74YFP	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	µBGA-8	50	Log59	9v	Ti
UP	-	SN74AUP1G74YZP	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	BGA-8	50	Log59	9v	Ti
UQ	-	RP130K481B	LVR-IC	LDO, LN, +CE, 4.8V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
UQ	-	RP152L015C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.5V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UR	-	74LVC1G17FW4	CMOS-Log	Schmitt-trigger	DFN1010	80	Log11	9u	Di
UR	-	74LVC1G17FZ4	CMOS-Log	Schmitt-trigger	DFN1410	52	Log11	9u	Di
UR	-	RP130K491B	LVR-IC	LDO, LN, +CE, 4.9V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
UR	-	RP152L016C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UR	-	SN74AUC2G79YZP	CMOS-Log	Dual positive-edge triggered D-type flip-flop	BGA-8	50	Log63	9v	Ti
US	-	74LVC1G00FW4	CMOS-Log	2-input NAND gate	DFN1010	80	Log1	9u	Di
US	-	74LVC1G00FZ4	CMOS-Log	2-input NAND gate	DFN1410	52	Log1	9u	Di
US	-	BAR88-099L4	Si-diode	Dual, Ant, Sw, 80V, 0.1A, Vf<1.2V(100mA), 0.28pF(1GHz)	TSLP-4-4	31ce	-	2b	Inf
US	-	RP130K501B	LVR-IC	LDO, LN, +CE, 5V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
US	-	RP152L017C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UT	-	74LVC1G02FZ4	CMOS-Log	2-input NOR gate	DFN1410	52	Log2	9u	Di
UT	-	BAR88-07L4	Si-diode	Dual, Ant, Sw, 80V, 0.1A, Vf<1.2V(100mA), 0.28pF(1GHz)	TSLP-4-4	31ce	-	2b	Inf
UT	-	RP152L018C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/1.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UT	-	SN74AUC2G06YZP	CMOS-Log	Dual inverter buffers/drivers (ODO)	BGA-6	40	Log25	9v	Ti
UU	-	74LVC1G04FZ4	CMOS-Log	Inverter	DFN1410	52	Log6	9u	Di
UU	-	BAR88-02L	Si-diode	Ant sw, 80V, 0.1A, 250mW, Vf<1.2V(0.1A), 0.28pF(1GHz)	TSLP-2-1	13d	-	2b	Inf
UU	-	RP152L019C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.6V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UV	-	74LVC1G08FZ4	CMOS-Log	2-input AND gate	DFN1410	52	Log3	9u	Di
UV	-	RP152L020C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UV	-	SN74AUC2G07YZP	CMOS-Log	Dual noninverting buffers/drivers (ODO)	BGA-6	40	Log26	9v	Ti
UW	-	74LVC1G32FZ4	CMOS-Log	2-input OR gate	DFN1410	52	Log4	9u	Di
UW	-	RP152L021C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UX	-	74LVC1G86FZ4	CMOS-Log	2-input EXCLUSIVE-OR gate	DFN1410	52	Log5	9u	Di
UX	-	RP152L022C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.2V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UX	-	SN74AUC2G80YZP	CMOS-Log	Dual positive-edge triggered D-type flip-flop	BGA-8	50	Log64	9v	Ti
UX	-	XC6221B4917R	LVR-IC	LDO, 4.9V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
UY	-	74LVC1G125FZ4	CMOS-Log	Bus buffer gate with 3-state output	DFN1410	52	Log14	9u	Di
UY	-	RP152L023C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.5V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
UY	-	XC6221B5017R	LVR-IC	LDO, 5.0V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
UZ	-	74LVC1G126FZ4	CMOS-Log	Bus buffer gate with 3-state output	DFN1410	52	Log13	9u	Di
UZ	-	RP152L024C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/3.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
V0	-	R3117K473C	Vdet-IC	4.7V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
V0	-	RP152L049B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
V001	-	R5326K001A	LVR-IC	LDO, Dual out, V1=2V±1%, V2=2V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V002	-	R5326K002A	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=2.8V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V003	-	R5326K003A	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=3V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V004	-	R5326K004A	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=3V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V005	-	R5326K005A	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=2.5V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V006	-	R5326K006A	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=3.3V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V007	-	R5326K007A	LVR-IC	LDO, Dual out, V1=2.5V±1%, V2=2.8V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V008	-	R5326K008A	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=1.2V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V009	-	R5326K009A	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=1.6V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V010	-	R5326K010A	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=2.8V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V011	-	R5326K011A	LVR-IC	LDO, Dual out, V1=3V±1%, V2=3V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V012	-	R5326K012A	LVR-IC	LDO, Dual out, V1=3.1V±1%, V2=3.1V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V013	-	R5326K013A	LVR-IC	LDO, Dual out, V1=2.7V±1%, V2=1.8V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V014	-	R5326K014A	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=2.6V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V015	-	R5326K015A	LVR-IC	LDO, Dual out, V1=3.3V±1%, V2=3.3V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V016	-	R5326K016A	LVR-IC	LDO, Dual out, V1=2.85V±1%, V2=2.85V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V017	-	R5326K017A	LVR-IC	LDO, Dual out, V1=1.1V±1%, V2=1.1V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V018	-	R5326K018A	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=1.2V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V019	-	R5326K019A	LVR-IC	LDO, Dual out, V1=1.2V±1%, V2=2.9V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V020	-	R5326K020A	LVR-IC	LDO, Dual out, V1=2.8V±1%, V2=3.0V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V021	-	R5326K021A	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=2.8V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V022	-	R5326K022A	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=2.9V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V023	-	R5326K023A	LVR-IC	LDO, Dual out, V1=4.2V±1%, V2=3.1V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V024	-	R5326K024A	LVR-IC	LDO, Dual out, V1=1.5V±1%, V2=3.0V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V025	-	R5326K025A	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=1.85V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V026	-	R5326K026A	LVR-IC	LDO, Dual out, V1=1.8V±1%, V2=2.85V±1%, 150mA, +CE	DFN1820-6	74ri	VR19	9b	Ric
V04	-	74LVC3G04GD	CMOS-Log	Triple inverters	SOT996-2	54	Log56	9z	Nxp
V04	-	74LVC3G04GM	CMOS-Log	Triple inverters	SOT902-1	51	Log56	9z	Nxp





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V04	-	74LVC3G04GT	CMOS-Log	Triple inverters	SOT833-1	53	Log56	9z	Nxp
V06	-	74LVC3G06GD	CMOS-Log	Triple inverters (ODO)	SOT996-2	54	Log72	9z	Nxp
V06	-	74LVC3G06GM	CMOS-Log	Triple inverters (ODO)	SOT902-1	51	Log72	9z	Nxp
V06	-	74LVC3G06GT	CMOS-Log	Triple inverters (ODO)	SOT833-1	53	Log72	9z	Nxp
V07	-	74LVC3G07GD	CMOS-Log	Triple noninverting buffers/drivers (ODO)	SOT996-2	54	Log73	9z	Nxp
V07	-	74LVC3G07GM	CMOS-Log	Triple noninverting buffers/drivers (ODO)	SOT902-1	51	Log73	9z	Nxp
V07	-	74LVC3G07GT	CMOS-Log	Triple noninverting buffers/drivers (ODO)	SOT833-1	53	Log73	9z	Nxp
V0A	-	XC6118N20AGR-G	Vdet-IC	2.0V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
V0B	-	XC6118N20BGR-G	Vdet-IC	2.0V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
V0C	-	XC6118N20CGR-G	Vdet-IC	2.0V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
V0D	-	XC6118N20DGR-G	Vdet-IC	2.0V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
V1	-	R3117K483C	Vdet-IC	4.8V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
V14	-	74LVC3G14GD	CMOS-Log	Triple Schmitt-trigger inverters	SOT996-2	54	Log57	9z	Nxp
V14	-	74LVC3G14GM	CMOS-Log	Triple Schmitt-trigger inverters	SOT902-1	51	Log57	9z	Nxp
V14	-	74LVC3G14GT	CMOS-Log	Triple Schmitt-trigger inverters	SOT833-1	53	Log57	9z	Nxp
V17	-	74LVC3G17GD	CMOS-Log	Triple non-inverting Schmitt-trigger	SOT996-2	54	Log71	9z	Nxp
V17	-	74LVC3G17GM	CMOS-Log	Triple non-inverting Schmitt-trigger	SOT902-1	51	Log71	9z	Nxp
V17	-	74LVC3G17GT	CMOS-Log	Triple non-inverting Schmitt-trigger	SOT833-1	53	Log71	9z	Nxp
V1A	-	XC6118N21AGR-G	Vdet-IC	2.1V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
V1B	-	XC6118N21BGR-G	Vdet-IC	2.1V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
V1C	-	XC6118N21CGR-G	Vdet-IC	2.1V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
V1D	-	XC6118N21DGR-G	Vdet-IC	2.1V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
V2	-	R3117K493C	Vdet-IC	4.9V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
V2A	-	XC6118N22AGR-G	Vdet-IC	2.2V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
V2B	-	XC6118N22BGR-G	Vdet-IC	2.2V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
V2C	-	XC6118N22CGR-G	Vdet-IC	2.2V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
V2D	-	XC6118N22DGR-G	Vdet-IC	2.2V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
V3	-	R3117K503C	Vdet-IC	5.0V±1%, -Reset PPO, Sense	DFN1010-4	48rq	VD12	9a	Ric
V34	-	74LVC3G34GD	CMOS-Log	Triple non-inverter buffers	SOT996-2	54	Log69	9z	Nxp
V34	-	74LVC3G34GM	CMOS-Log	Triple non-inverter buffers	SOT902-1	51	Log69	9z	Nxp
V34	-	74LVC3G34GT	CMOS-Log	Triple non-inverter buffers	SOT833-1	53	Log69	9z	Nxp
V3A	-	XC6118N23AGR-G	Vdet-IC	2.3V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
V3B	-	XC6118N23BGR-G	Vdet-IC	2.3V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
V3C	-	XC6118N23CGR-G	Vdet-IC	2.3V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
V3D	-	XC6118N23DGR-G	Vdet-IC	2.3V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
V4	-	74LVC2G04GM	CMOS-Log	Dual inverters	SOT886	57	Log24	9z	Nxp
V4A	-	XC6118N24AGR-G	Vdet-IC	2.4V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
V4B	-	XC6118N24BGR-G	Vdet-IC	2.4V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
V4C	-	XC6118N24CGR-G	Vdet-IC	2.4V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
V4D	-	XC6118N24DGR-G	Vdet-IC	2.4V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
V5	-	74LVC1T45GF	CMOS-Log	Dual supply translating transceiver with 3-state output	SOT891	52	Log70	9z	Nxp
V5	-	74LVC1T45GM	CMOS-Log	Dual supply translating transceiver with 3-state output	SOT886	57	Log70	9z	Nxp
V53	-	74LVC1G53GM	CMOS-Log	2-channel analog multiplexer/demultiplexer	SOT902-1	51	Log58	9z	Nxp
V53	-	74LVC1G53GT	CMOS-Log	2-channel analog multiplexer/demultiplexer	SOT833-1	53	Log58	9z	Nxp
V53	-	74LVC2G53GT	CMOS-Log	2-channel analog multiplexer/demultiplexer	SOT833-1	53	Log58	9z	Nxp
V5A	-	XC6118N25AGR-G	Vdet-IC	2.5V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
V5B	-	XC6118N25BGR-G	Vdet-IC	2.5V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
V5C	-	XC6118N25CGR-G	Vdet-IC	2.5V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
V5D	-	XC6118N25DGR-G	Vdet-IC	2.5V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
V6	-	74LVC2G06GM	CMOS-Log	Dual inverter buffers/drivers (ODO)	SOT886	57	Log25	9z	Nxp
V66	-	74LVC2G66GM	CMOS-Log	2-channel analog switch	SOT902-1	51	Log68	9z	Nxp
V66	-	74LVC2G66GT	CMOS-Log	2-channel analog switch	SOT833-1	53	Log68	9z	Nxp
V6A	-	XC6118N26AGR-G	Vdet-IC	2.6V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
V6B	-	XC6118N26BGR-G	Vdet-IC	2.6V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
V6C	-	XC6118N26CGR-G	Vdet-IC	2.6V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
V6D	-	XC6118N26DGR-G	Vdet-IC	2.6V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
V7	-	74LVC2G07GM	CMOS-Log	Dual noninverting buffers/drivers (ODO)	SOT886	57	Log26	9z	Nxp
V74	-	74LVC1G74GD	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	SOT996-2	54	Log59	9z	Nxp
V74	-	74LVC1G74GM	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	SOT902-1	51	Log59	9z	Nxp
V74	-	74LVC1G74GT	CMOS-Log	Positive edge-triggered D-type flip-flop with set and reset	SOT833-1	53	Log59	9z	Nxp
V74	-	74LVC2G74GT	CMOS-Log	D-type flip-flop with preset and clear	SOT833-1	53	Log59	9z	Nxp
V7A	-	XC6118N27AGR-G	Vdet-IC	2.7V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
V7B	-	XC6118N27BGR-G	Vdet-IC	2.7V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
V7C	-	XC6118N27CGR-G	Vdet-IC	2.7V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
V7D	-	XC6118N27DGR-G	Vdet-IC	2.7V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
V86	-	74LVC2G86GM	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	SOT902-1	51	Log65	9z	Nxp
V86	-	74LVC2G86GT	CMOS-Log	Dual 2-input EXCLUSIVE-OR gates	SOT833-1	53	Log65	9z	Nxp
V8A	-	XC6118N28AGR-G	Vdet-IC	2.8V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
V8B	-	XC6118N28BGR-G	Vdet-IC	2.8V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
V8C	-	XC6118N28CGR-G	Vdet-IC	2.8V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
V8D	-	XC6118N28DGR-G	Vdet-IC	2.8V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
V99	-	74LVC1G99GM	CMOS-Log	Ultra-configurable multiple function gate with 3-state output	SOT902-1	51	Log84	9z	Nxp
V99	-	74LVC1G99GT	CMOS-Log	Ultra-configurable multiple function gate with 3-state output	SOT833-1	53	Log84	9z	Nxp
V9A	-	XC6118N29AGR-G	Vdet-IC	2.9V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
V9B	-	XC6118N29BGR-G	Vdet-IC	2.9V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
V9C	-	XC6118N29CGR-G	Vdet-IC	2.9V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
V9D	-	XC6118N29DGR-G	Vdet-IC	2.9V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
VA	-	74LVC1G00GF	CMOS-Log	2-input NAND gate	SOT891	52	Log1	9z	Nxp
VA	-	74LVC1G00GM	CMOS-Log	2-input NAND gate	SOT886	57	Log1	9z	Nxp
VA	-	AP7365-ADJSN	LVR-IC	LDO, Adjustable, 0.8..3.9V, 600mA, +CE	DFN2020-6	91d3	VR16	9u	Di
VA	-	RP130K121D	LVR-IC	LDO, LN, +CE, CL, 1.2V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VA	-	RP152L025C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.0V/3.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VB	-	74LVC1G02GF	CMOS-Log	2-input NOR gate	SOT891	52	Log2	9z	Nxp
VB	-	74LVC1G02GM	CMOS-Log	2-input NOR gate	SOT886	57	Log2	9z	Nxp
VB	-	AP7365-08SN	LVR-IC	LDO, 0.8V±2%, 600mA, +CE	DFN2020-6	91xu	VR4	9u	Di
VB	-	RP130K131D	LVR-IC	LDO, LN, +CE, CL, 1.3V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VB	-	RP152L026C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.1V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VC	-	74LVC1G04GF	CMOS-Log	Inverter	SOT891	52	Log6	9z	Nxp
VC	-	74LVC1G04GM	CMOS-Log	Inverter	SOT886	57	Log6	9z	Nxp
VC	-	AP7365-10SN	LVR-IC	LDO, 1.0V±2%, 600mA, +CE	DFN2020-6	91xu	VR4	9u	Di
VC	-	RP130K141D	LVR-IC	LDO, LN, +CE, CL, 1.4V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VC	-	RP152L027C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.3V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VD	-	74LVC1GU04GF	CMOS-Log	Inverter	SOT891	52	Log6	9z	Nxp
VD	-	74LVC1GU04GM	CMOS-Log	Inverter	SOT886	57	Log6	9z	Nxp
VD	-	AP7365-12SN	LVR-IC	LDO, 1.2V±2%, 600mA, +CE	DFN2020-6	91xu	VR4	9u	Di
VD	-	RP130K151D	LVR-IC	LDO, LN, +CE, CL, 1.5V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VD	-	RP152L028C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/1.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VE	-	74LVC1G08GF	CMOS-Log	2-input AND gate	SOT891	52	Log3	9z	Nxp
VE	-	74LVC1G08GM	CMOS-Log	2-input AND gate	SOT886	57	Log3	9z	Nxp
VE	-	AP7365-15SN	LVR-IC	LDO, 1.5V±2%, 600mA, +CE	DFN2020-6	91xu	VR4	9u	Di
VE	-	RP130K161D	LVR-IC	LDO, LN, +CE, CL, 1.6V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VE	-	RP152L029C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/1.5V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VF	-	74LVC1G14GF	CMOS-Log	Inverting Schmitt-trigger	SOT891	52	Log7	9z	Nxp
VF	-	74LVC1G14GM	CMOS-Log	Inverting Schmitt-trigger	SOT886	57	Log7	9z	Nxp
VF	-	AP7365-18SN	LVR-IC	LDO, 1.8V±2%, 600mA, +CE	DFN2020-6	91xu	VR4	9u	Di
VF	-	RP130K171D	LVR-IC	LDO, LN, +CE, CL, 1.7V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VF	-	RP152L030C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.3V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VG	-	74LVC1G32GF	CMOS-Log	2-input OR gate	SOT891	52	Log4	9z	Nxp
VG	-	74LVC1G32GM	CMOS-Log	2-input OR gate	SOT886	57	Log4	9z	Nxp
VG	-	AP7365-20SN	LVR-IC	LDO, 2.0V±2%, 600mA, +CE	DFN2020-6	91xu	VR4	9u	Di
VG	-	RP130K181D	LVR-IC	LDO, LN, +CE, CL, 1.8V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VG	-	RP152L031C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.7V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VH	-	74LVC1G86GF	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT891	52	Log5	9z	Nxp
VH	-	74LVC1G86GM	CMOS-Log	2-input EXCLUSIVE-OR gate	SOT886	57	Log5	9z	Nxp
VH	-	AP7365-25SN	LVR-IC	LDO, 2.5V±2%, 600mA, +CE	DFN2020-6	91xu	VR4	9u	Di
VH	-	LD6805K/33H	LVR-IC	LDO, 3.3V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
VH	-	RP130K181D5	LVR-IC	LDO, LN, +CE, CL, 1.85V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VH	-	RP152L032C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/3.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VJ	-	74LVC1G17GF	CMOS-Log	Schmitt-trigger	SOT891	52	Log11	9z	Nxp
VJ	-	74LVC1G17GM	CMOS-Log	Schmitt-trigger	SOT886	57	Log11	9z	Nxp
VJ	-	AP7365-28SN	LVR-IC	LDO, 2.8V±2%, 600mA, +CE	DFN2020-6	91xu	VR4	9u	Di
VJ	-	RP130K191D	LVR-IC	LDO, LN, +CE, CL, 1.9V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VJ	-	RP152L033C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.1V/3.1V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VK	-	74LVC2G14GM	CMOS-Log	Dual Schmitt-trigger inverter buffers	SOT886	57	Log34	9z	Nxp
VK	-	AP7365-30SN	LVR-IC	LDO, 3.0V±2%, 600mA, +CE	DFN2020-6	91xu	VR4	9u	Di
VK	-	RP130K201D	LVR-IC	LDO, LN, +CE, CL, 2V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VK	-	RP152L034C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.6V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VL	-	74LVC1G66GF	CMOS-Log	Single-pole single-throw analog switch	SOT891	52	Log16	9z	Nxp
VL	-	74LVC1G66GM	CMOS-Log	Single-pole single-throw analog switch	SOT886	57	Log16	9z	Nxp
VL	-	RP130K211D	LVR-IC	LDO, LN, +CE, CL, 2.1V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VL	-	RP152L035C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/1.2V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VM	-	74LVC1G125GF	CMOS-Log	Bus buffer gate with 3-state output	SOT891	52	Log14	9z	Nxp
VM	-	74LVC1G125GM	CMOS-Log	Bus buffer gate with 3-state output	SOT886	57	Log14	9z	Nxp
VM	-	AP7365-33SN	LVR-IC	LDO, 3.3V±2%, 600mA, +CE	DFN2020-6	91xu	VR4	9u	Di
VM	-	RP130K221D	LVR-IC	LDO, LN, +CE, CL, 2.2V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VM	-	RP152L036C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VMF	-	MIC5322-2.8/1.5YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.5V±2%, 150mA, -CE	MLF-6	74g2	VR31	9x	Mcr
VMG	-	MIC5322-2.8/1.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.8V/1.8V±2%, 150mA, -CE	MLF-6	74g2	VR31	9x	Mcr
VN	-	74LVC1G126GF	CMOS-Log	Bus buffer gate with 3-state output	SOT891	52	Log13	9z	Nxp
VN	-	74LVC1G126GM	CMOS-Log	Bus buffer gate with 3-state output	SOT886	57	Log13	9z	Nxp

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
VN	-	AP7365-39SN	LVR-IC	LDO, 3.9V±2%, 600mA, +CE	DFN2020-6	91xu	VR4	9u	Di
VN	-	RP130K231D	LVR-IC	LDO, LN, +CE, CL, 2.3V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VN	-	RP152L037C	LVR-IC	LDO, Dual out, Vout1/Vout2=3.3V/2.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VNN	-	MIC5322-2.85/2.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=2.85V/2.85V±2%, 150mA, -CE	MLF-6	74g2	VR31	9x	Mcr
VP	-	74LVC1G79GF	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT891	52	Log20	9z	Nxp
VP	-	74LVC1G79GM	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT886	57	Log20	9z	Nxp
VP	-	LD6805K/33P	LVR-IC	LDO, 3.3V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
VP	-	RP130K241D	LVR-IC	LDO, LN, +CE, CL, 2.4V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VP	-	RP152L038C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.85V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VPM	-	MIC5322-3.0/2.8YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.8V±2%, 150mA, -CE	MLF-6	74g2	VR31	9x	Mcr
VPN	-	MIC5322-3.0/2.85YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/2.85V±2%, 150mA, -CE	MLF-6	74g2	VR31	9x	Mcr
VPP	-	MIC5322-3.0/3.0YMT	LVR-IC	LDO, Dual out, Vo1/Vo2=3.0V/3.0V±2%, 150mA, -CE	MLF-6	74g2	VR31	9x	Mcr
VQ	-	RP130K251D	LVR-IC	LDO, LN, +CE, CL, 2.5V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VQ	-	RP152L039C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.1V/3.3V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VR	-	74LVC1G06GF	CMOS-Log	Inverter (ODO)	SOT891	52	Log19	9z	Nxp
VR	-	74LVC1G06GM	CMOS-Log	Inverter (ODO)	SOT886	57	Log19	9z	Nxp
VR	-	RP130K261D	LVR-IC	LDO, LN, +CE, CL, 2.6V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VR	-	RP152L040C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.85V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VS	-	74LVC1G07GF	CMOS-Log	Noninverting buffer/driver (ODO)	SOT891	52	Log8	9z	Nxp
VS	-	74LVC1G07GM	CMOS-Log	Noninverting buffer/driver (ODO)	SOT886	57	Log8	9z	Nxp
VS	-	RP130K271D	LVR-IC	LDO, LN, +CE, CL, 2.7V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VS	-	RP152L041C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VT	-	74LVC1G80GF	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT891	52	Log21	9z	Nxp
VT	-	74LVC1G80GM	CMOS-Log	Positive edge-triggered D-type flip-flop	SOT886	57	Log21	9z	Nxp
VT	-	RP130K281D	LVR-IC	LDO, LN, +CE, CL, 2.8V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VT	-	RP152L042C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.6V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VU	-	74LVC1G11GF	CMOS-Log	3-input AND gate	SOT891	52	Log30	9z	Nxp
VU	-	74LVC1G11GM	CMOS-Log	3-input AND gate	SOT886	57	Log30	9z	Nxp
VU	-	74LVC1G11GN	CMOS-Log	3-input AND gate	SOT1115	52	Log30	9z	Nxp
VU	-	74LVC1G11GS	CMOS-Log	3-input AND gate	SOT1202	52	Log30	9z	Nxp
VU	-	RP130K281D5	LVR-IC	LDO, LN, +CE, CL, 2.85V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VU	-	RP152L043C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.3V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VU4	-	74LVC3GU04GM	CMOS-Log	Triple inverters	SOT902-1	51	Log56	9z	Nxp
VU4	-	74LVC3GU04GT	CMOS-Log	Triple inverters	SOT833-1	53	Log56	9z	Nxp
VV	-	74LVC2G17GM	CMOS-Log	Dual Schmitt-trigger buffers	SOT886	57	Log27	9z	Nxp
VV	-	MIC2211-3.6/3.6BML	LVR-IC	LDO, Dual out, Vo1/Vo2=3.6V(150mA)/3.6V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
VV	-	RP130K291D	LVR-IC	LDO, LN, +CE, CL, 2.9V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VV	-	RP152L044C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.1V/1.5V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VW	-	RP130K301D	LVR-IC	LDO, LN, +CE, CL, 3V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VW	-	RP152L045C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.3V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VX	-	RP130K311D	LVR-IC	LDO, LN, +CE, CL, 3.1V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VX	-	RP152L046C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VY	-	74LVC1G19GF	CMOS-Log	1-of-2 decoder/demultiplexer	SOT891	52	Log47	9z	Nxp
VY	-	74LVC1G19GM	CMOS-Log	1-of-2 decoder/demultiplexer	SOT886	57	Log47	9z	Nxp
VY	-	RP130K321D	LVR-IC	LDO, LN, +CE, CL, 3.2V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VY	-	RP152L047C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/2.8V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
VZ	-	RP130K331D	LVR-IC	LDO, LN, +CE, CL, 3.3V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
VZ	-	RP152L048C	LVR-IC	LDO, Dual out, Vout1/Vout2=2.5V/3.2V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
W0	-	RP152L049C	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/2.85V±1%, 150mA, +CE, CL	DFN1212-6	52x4	VR19	9a	Ric
W001	-	R5328K001B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
W002	-	R5328K002B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
W003	-	R5328K003B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
W004	-	R5328K004B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
W005	-	R5328K005B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
W006	-	R5328K006B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
W007	-	R5328K007B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
W008	-	R5328K008B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
W009	-	R5328K009B	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
W010	-	R5328K010B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
W011	-	R5328K011B	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
W1	-	BZT52C2V7LP	Z-diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 250mW	DFN1006-2	13d	-	2a	Di
W1	-	BZT52C2V7LP	Z-diode	2.7V±5%, Izt=5mA, Zzt=100Ω, 250mW	DFN1006-2	13d	-	2b	Di
W2	-	BCR189L3	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=22k, 150MHz	TSLP-3	22ta	-	2a	Inf
W2	-	BZT52C3V0LP	Z-diode	3.0V±5%, Izt=5mA, Zzt=95Ω, 250mW	DFN1006-2	13d	-	2a	Di
W2	-	BZT52C3V0LP	Z-diode	3.0V±5%, Izt=5mA, Zzt=95Ω, 250mW	DFN1006-2	13d	-	2b	Di
W28	-	MIC5255-2.8BML	LVR-IC	LDO, 2.8V±1%, 150mA, +CE	MLF-6	74ub	VR7	9a	Mcr
W28	mg	MIC5255-2.8YML	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, Pb-free	MLF-6	74ub	VR7	9a	Mcr
W2J	-	MIC5255-2.85BML	LVR-IC	LDO, 2.85V±1%, 150mA, +CE	MLF-6	74ub	VR7	9a	Mcr
W2J	mg	MIC5255-2.85YML	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, Pb-free	MLF-6	74ub	VR7	9a	Mcr
W3	-	BZT52C3V3LP	Z-diode	3.3±5%, Izt=5mA, Zzt=95Ω, 250mW	DFN1006-2	13d	-	2a	Di

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
W3	-	BZT52C3V3LP	Z-diode	3.3±5%, Izt=5mA, Zzt=95Ω, 250mW	DFN1006-2	13d	-	2b	Di
W30	-	MIC5255-3.0BML	LVR-IC	LDO, 3.0V±1%, 150mA, +CE	MLF-6	74ub	VR7	9a	Mcr
W30	mg	MIC5255-3.0YML	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, Pb-free	MLF-6	74ub	VR7	9a	Mcr
W33	-	MIC5255-3.3BML	LVR-IC	LDO, 3.3V±1%, 150mA, +CE	MLF-6	74ub	VR7	9a	Mcr
W33	mg	MIC5255-3.3YML	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, Pb-free	MLF-6	74ub	VR7	9a	Mcr
W4	-	BZT52C3V6LP	Z-diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 250mW	DFN1006-2	13d	-	2a	Di
W4	-	BZT52C3V6LP	Z-diode	3.6V±5%, Izt=5mA, Zzt=90Ω, 250mW	DFN1006-2	13d	-	2b	Di
W5	-	BZT52C3V9LP	Z-diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 250mW	DFN1006-2	13d	-	2b	Di
W5	-	BZT52C3V9LP	Z-diode	3.9V±5%, Izt=5mA, Zzt=90Ω, 250mW	DFN1006-2	13d	-	2a	Di
W6	-	BZT52C4V3LP	Z-diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 250mW	DFN1006-2	13d	-	2a	Di
W6	-	BZT52C4V3LP	Z-diode	4.3V±5%, Izt=5mA, Zzt=90Ω, 250mW	DFN1006-2	13d	-	2b	Di
W7	-	BZT52C4V7LP	Z-diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 250mW	DFN1006-2	13d	-	2b	Di
W7	-	BZT52C4V7LP	Z-diode	4.7V±5%, Izt=5mA, Zzt=80Ω, 250mW	DFN1006-2	13d	-	2a	Di
WA	-	BCR103L3	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k, 140MHz	TSLP-3	22ta	-	2a	Inf
WA	-	EUA4890AH	Lin-IC	AF PA, BTL, 3..5.5V, 1W(5V/8Ω), shutdown	BGA-9	39	AFP44	9a	Eut
WA	-	RP130K341D	LVR-IC	LDO, LN, +CE, CL, 3.4V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WA	-	RP201K081B	LVR-IC	LDO, 0.8V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WB	-	BCR153L3	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/2.2k, 200MHz	TSLP-3	22ta	-	2a	Inf
WB	-	RP130K351D	LVR-IC	LDO, LN, +CE, CL, 3.5V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WB	-	RP201K091B	LVR-IC	LDO, 0.9V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WC	-	BCR133L3	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k, 130MHz	TSLP-3	22ta	-	2a	Inf
WC	-	RP130K361D	LVR-IC	LDO, LN, +CE, CL, 3.6V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WC	-	RP201K101B	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WD	-	BCR141L3	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k, 130MHz	TSLP-3	22ta	-	2a	Inf
WD	-	RP130K371D	LVR-IC	LDO, LN, +CE, CL, 3.7V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WD	-	RP201K111B	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WE	-	BCR148L3	Si-npn-Digi	Sw, 50V, 70mA, 250mW, R1/R2=47k/47k, 100MHz	TSLP-3	22ta	-	2a	Inf
WE	-	RP130K381D	LVR-IC	LDO, LN, +CE, CL, 3.8V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WE	-	RP201K121B	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WF	-	BCR112L3	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k, 140MHz	TSLP-3	22ta	-	2a	Inf
WF	-	RP130K391D	LVR-IC	LDO, LN, +CE, CL, 3.9V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WF	-	RP201K131B	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WG	-	BCR116L3	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k, 150MHz	TSLP-3	22ta	-	2a	Inf
WG	-	RP130K401D	LVR-IC	LDO, LN, +CE, CL, 4V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WG	-	RP201K141B	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WH	-	BCR108L3	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k, 170MHz	TSLP-3	22ta	-	2a	Inf
WH	-	RP130K411D	LVR-IC	LDO, LN, +CE, CL, 4.1V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WH	-	RP201K151B	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WI	-	BCR158L3	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=2.2k/47k, 170MHz	TSLP-3	22ta	-	2a	Inf
WJ	-	BCR135L3	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k, 150MHz	TSLP-3	22ta	-	2a	Inf
WJ	-	RP130K421D	LVR-IC	LDO, LN, +CE, CL, 4.2V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WJ	-	RP201K161B	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WK	-	BCR119L3	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k, 150MHz	TSLP-3	22ta	-	2a	Inf
WK	-	RP130K431D	LVR-IC	LDO, LN, +CE, CL, 4.3V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WK	-	RP201K171B	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WL	-	BCR146L3	Si-npn-Digi	Sw, 50V, 70mA, 250mW, R1/R2=47k/22k, 150MHz	TSLP-3	22ta	-	2a	Inf
WL	-	RP130K441D	LVR-IC	LDO, LN, +CE, CL, 4.4V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WL	-	RP201K181B	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WM	-	BCR183L3	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/10k, 130MHz	TSLP-3	22ta	-	2a	Inf
WM	-	MIC2211-1.6/2.8BML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(150mA)/2.8V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
WM	-	RP130K451D	LVR-IC	LDO, LN, +CE, CL, 4.5V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WM	-	RP201K191B	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WN	-	BCR185L3	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=10k/47k, 150MHz	TSLP-3	22ta	-	2a	Inf
WN	-	RP130K461D	LVR-IC	LDO, LN, +CE, CL, 4.6V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WN	-	RP201K201B	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WO	-	BCR191L3	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/22k, 130MHz	TSLP-3	22ta	-	2a	Inf
WP	-	BCR192L3	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k, 150MHz	TSLP-3	22ta	-	2a	Inf
WP	-	RP130K471D	LVR-IC	LDO, LN, +CE, CL, 4.7V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WP	-	RP201K211B	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WQ	-	MIC2211-1.6/2.9BML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(150mA)/2.9V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
WQ	-	RP130K481D	LVR-IC	LDO, LN, +CE, CL, 4.8V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WQ	-	RP201K221B	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WR	-	BCR198L3	Si-pnp-Digi	Sw, 50V, 70mA, 250mW, R1/R2=47k/47k, 100MHz	TSLP-3	22ta	-	2a	Inf
WR	-	RP130K491D	LVR-IC	LDO, LN, +CE, CL, 4.9V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WR	-	RP201K231B	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WS	-	BCR169L3	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=4.7k, 150MHz	TSLP-3	22ta	-	2a	Inf
WS	-	MIC2211-1.6/3.3BML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.6V(150mA)/3.3V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
WS	-	RP130K501D	LVR-IC	LDO, LN, +CE, CL, 5V±1%, 150mA	DFN1010-4	48vm	VR4	9a	Ric
WS	-	RP201K241B	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WT	-	BCR166L3	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/47k, 150MHz	TSLP-3	22ta	-	2a	Inf

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
WT	-	RP201K251B	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WU	-	BCR162L3	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1/R2=4.7k/4.7k, 140MHz	TSLP-3	22ta	-	2a	Inf
WU	-	RP201K261B	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WV	-	BCR129L3	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=10k, 150MHz	TSLP-3	22ta	-	2a	Inf
WV	-	RP201K271B	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WW	-	BCR179L3	Si-pnp-Digi	Sw, 50V, 100mA, 250mW, R1=10k, 150MHz	TSLP-3	22ta	-	2a	Inf
WW	-	RP201K281B	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WX	-	BCR196L3	Si-pnp-Digi	Sw, 50V, 70mA, 250mW, R1/R2=47k/22k, 150MHz	TSLP-3	22ta	-	2a	Inf
WX	-	BZT52C2V4LP	Z-diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 250mW	DFN1006-2	13d	-	2a	Di
WX	-	BZT52C2V4LP	Z-diode	2.4V±5%, Izt=5mA, Zzt=100Ω, 250mW	DFN1006-2	13d	-	2b	Di
WX	-	RP201K291B	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WY	-	BCR139L3	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1=22k, 150MHz	TSLP-3	22ta	-	2a	Inf
WY	-	RP201K301B	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WZ	-	BCR142L3	Si-npn-Digi	Sw, 50V, 100mA, 250mW, R1/R2=22k/47k, 150MHz	TSLP-3	22ta	-	2a	Inf
WZ	-	RP201K311B	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
WZ-	-	RT9193T-25PB	LVR-IC	LDO, 2.5V±1%, 300mA, +CE	WDFN-6L	49ub	VR7	9a	Rct
X001	-	R5328K001A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/2.8V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
X002	-	R5328K002A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/3.0V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
X003	-	R5328K003A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.9V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
X004	-	R5328K004A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.8V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
X005	-	R5328K005A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.8V/2.5V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
X006	-	R5328K006A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/1.8V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
X007	-	R5328K007A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.2V/2.9V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
X008	-	R5328K008A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/2.6V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
X009	-	R5328K009A	LVR-IC	LDO, Dual out, Vout1/Vout2=1.5V/3.0V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
X010	-	R5328K010A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.9V/3.0V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
X011	-	R5328K011A	LVR-IC	LDO, Dual out, Vout1/Vout2=2.8V/3.0V±1%, 150mA, +CE, ECO	DFN2020-8	75	-	9b	Ric
X0A	-	XC6118N30AGR-G	Vdet-IC	3.0V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
X0B	-	XC6118N30BGR-G	Vdet-IC	3.0V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
X0C	-	XC6118N30CGR-G	Vdet-IC	3.0V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
X0D	-	XC6118N30DGR-G	Vdet-IC	3.0V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
X1A	-	XC6118N31AGR-G	Vdet-IC	3.1V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
X1B	-	XC6118N31BGR-G	Vdet-IC	3.1V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
X1C	-	XC6118N31CGR-G	Vdet-IC	3.1V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
X1D	-	XC6118N31DGR-G	Vdet-IC	3.1V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
X2A	-	XC6118N32AGR-G	Vdet-IC	3.2V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
X2B	-	XC6118N32BGR-G	Vdet-IC	3.2V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
X2C	-	XC6118N32CGR-G	Vdet-IC	3.2V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
X2D	-	XC6118N32DGR-G	Vdet-IC	3.2V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
X3A	-	XC6118N33AGR-G	Vdet-IC	3.3V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
X3B	-	XC6118N33BGR-G	Vdet-IC	3.3V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
X3C	-	XC6118N33CGR-G	Vdet-IC	3.3V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
X3D	-	XC6118N33DGR-G	Vdet-IC	3.3V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
X4A	-	XC6118N34AGR-G	Vdet-IC	3.4V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
X4B	-	XC6118N34BGR-G	Vdet-IC	3.4V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
X4C	-	XC6118N34CGR-G	Vdet-IC	3.4V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
X4D	-	XC6118N34DGR-G	Vdet-IC	3.4V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
X5	-	74LVCH1T45GF	CMOS-Log	Dual supply translating transceiver with 3-state output	SOT891	52	Log70	9z	Nxp
X5	-	74LVCH1T45GM	CMOS-Log	Dual supply translating transceiver with 3-state output	SOT886	57	Log70	9z	Nxp
X5A	-	XC6118N35AGR-G	Vdet-IC	3.5V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
X5B	-	XC6118N35BGR-G	Vdet-IC	3.5V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
X5C	-	XC6118N35CGR-G	Vdet-IC	3.5V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
X5D	-	XC6118N35DGR-G	Vdet-IC	3.5V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
X6A	-	XC6118N36AGR-G	Vdet-IC	3.6V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
X6B	-	XC6118N36BGR-G	Vdet-IC	3.6V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
X6C	-	XC6118N36CGR-G	Vdet-IC	3.6V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
X6D	-	XC6118N36DGR-G	Vdet-IC	3.6V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
X7A	-	XC6118N37AGR-G	Vdet-IC	3.7V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
X7B	-	XC6118N37BGR-G	Vdet-IC	3.7V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
X7C	-	XC6118N37CGR-G	Vdet-IC	3.7V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
X7D	-	XC6118N37DGR-G	Vdet-IC	3.7V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
X8A	-	XC6118N38AGR-G	Vdet-IC	3.8V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
X8B	-	XC6118N38BGR-G	Vdet-IC	3.8V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
X8C	-	XC6118N38CGR-G	Vdet-IC	3.8V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
X8D	-	XC6118N38DGR-G	Vdet-IC	3.8V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
X9A	-	XC6118N39AGR-G	Vdet-IC	3.9V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
X9B	-	XC6118N39BGR-G	Vdet-IC	3.9V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
X9C	-	XC6118N39CGR-G	Vdet-IC	3.9V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
X9D	-	XC6118N39DGR-G	Vdet-IC	3.9V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
XA	-	RP201K321B	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
XB	-	RP201K331B	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
XC	-	CHT847BM1PT-Q	Si-npn	AF, Sw, 45V, 100mA, B=110..220, 200MHz	FBPT-723	17ta	-	9a	Chm
XC	-	RP201K341B	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
XD	-	RP201K351B	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
XE	-	RP201K361B	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
XF	-	RP201K371B	LVR-IC	LDO, 3.7V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
XG	-	RP201K381B	LVR-IC	LDO, 3.8V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
XH	-	RP201K391B	LVR-IC	LDO, 3.9V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
XJ	-	RP201K401B	LVR-IC	LDO, 4.0V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
XK	-	RP201K281B5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
XXX	-	LM4946SQ	Lin-IC	AF PA, BTL, 2.7..5.5V, 540mW(4Ω)+2x35mW(8Ω), I2C	LQFN-24	38	-	9j	Nsc
y	-	BU33UA3WNVX	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
Y	-	MA4L784	Si-diode	SBD Sw, 30V, 100mA, Vf<0.55V(100mA), 20pF	ML4-N1	31en	-	2b	Pan
Y0A	-	XC6118N40AGR-G	Vdet-IC	4.0V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
Y0B	-	XC6118N40BGR-G	Vdet-IC	4.0V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
Y0C	-	XC6118N40CGR-G	Vdet-IC	4.0V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
Y0D	-	XC6118N40DGR-G	Vdet-IC	4.0V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
Y0P	-	SSM2315CBZ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/3Ω), shutdown	BGA-9	39	AFP45	9a	Ad
Y10	-	SSM2305CPZ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 2.8W(5V/4Ω), shutdown	CP-16	37	AFP24	9a	Ad
Y1A	-	XC6118N41AGR-G	Vdet-IC	4.1V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
Y1B	-	XC6118N41BGR-G	Vdet-IC	4.1V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
Y1C	-	XC6118N41CGR-G	Vdet-IC	4.1V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
Y1D	-	XC6118N41DGR-G	Vdet-IC	4.1V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
Y1L	-	SSM2335CBZ	Lin-IC	AF PA, BTL, class-D, 2.5..5.5V, 3W(5V/3Ω), shutdown	BGA-9	39	AFP45	9a	Ad
Y2A	-	XC6118N42AGR-G	Vdet-IC	4.2V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
Y2B	-	XC6118N42BGR-G	Vdet-IC	4.2V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
Y2C	-	XC6118N42CGR-G	Vdet-IC	4.2V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
Y2D	-	XC6118N42DGR-G	Vdet-IC	4.2V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
Y3A	-	XC6118N43AGR-G	Vdet-IC	4.3V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
Y3B	-	XC6118N43BGR-G	Vdet-IC	4.3V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
Y3C	-	XC6118N43CGR-G	Vdet-IC	4.3V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
Y3D	-	XC6118N43DGR-G	Vdet-IC	4.3V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
Y4A	-	XC6118N44AGR-G	Vdet-IC	4.4V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
Y4B	-	XC6118N44BGR-G	Vdet-IC	4.4V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
Y4C	-	XC6118N44CGR-G	Vdet-IC	4.4V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
Y4D	-	XC6118N44DGR-G	Vdet-IC	4.4V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
Y5A	-	XC6118N45AGR-G	Vdet-IC	4.5V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
Y5B	-	XC6118N45BGR-G	Vdet-IC	4.5V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
Y5C	-	XC6118N45CGR-G	Vdet-IC	4.5V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
Y5D	-	XC6118N45DGR-G	Vdet-IC	4.5V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
Y6A	-	XC6118N46AGR-G	Vdet-IC	4.6V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
Y6B	-	XC6118N46BGR-G	Vdet-IC	4.6V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
Y6C	-	XC6118N46CGR-G	Vdet-IC	4.6V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
Y6D	-	XC6118N46DGR-G	Vdet-IC	4.6V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
Y7A	-	XC6118N47AGR-G	Vdet-IC	4.7V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
Y7B	-	XC6118N47BGR-G	Vdet-IC	4.7V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
Y7C	-	XC6118N47CGR-G	Vdet-IC	4.7V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
Y7D	-	XC6118N47DGR-G	Vdet-IC	4.7V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
Y8A	-	XC6118N48AGR-G	Vdet-IC	4.8V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
Y8B	-	XC6118N48BGR-G	Vdet-IC	4.8V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
Y8C	-	XC6118N48CGR-G	Vdet-IC	4.8V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
Y8D	-	XC6118N48DGR-G	Vdet-IC	4.8V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
Y9A	-	XC6118N49AGR-G	Vdet-IC	4.9V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
Y9B	-	XC6118N49BGR-G	Vdet-IC	4.9V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
Y9C	-	XC6118N49CGR-G	Vdet-IC	4.9V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
Y9D	-	XC6118N49DGR-G	Vdet-IC	4.9V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
YA	-	74LVC2G34GM	CMOS-Log	Dual non-inverter buffers	SOT886	57	Log23	9z	Nxp
YA	-	RP201K081D	LVR-IC	LDO, 0.8V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YB	-	74LVC1G38GF	CMOS-Log	2-input NAND gate (ODO)	SOT891	52	Log17	9z	Nxp
YB	-	74LVC1G38GM	CMOS-Log	2-input NAND gate (ODO)	SOT886	57	Log17	9z	Nxp
YB	-	RP201K091D	LVR-IC	LDO, 0.9V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YC	-	74LVC1G57GF	CMOS-Log	Configurable multiple-function gate	SOT891	52	Log36	9z	Nxp
YC	-	74LVC1G57GM	CMOS-Log	Configurable multiple-function gate	SOT886	57	Log36	9z	Nxp
YC	-	CHT847BM1PT-R	Si-npn	AF, Sw, 45V, 100mA, B=200..450, 200MHz	FBPT-723	17ta	-	9a	Chm
YC	-	RP201K101D	LVR-IC	LDO, 1.0V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YD	-	74LVC2GU04GM	CMOS-Log	Dual inverters	SOT886	57	Log24	9z	Nxp
YD	-	RP201K111D	LVR-IC	LDO, 1.1V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YE	-	RP201K121D	LVR-IC	LDO, 1.2V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YF	-	RP201K131D	LVR-IC	LDO, 1.3V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YG	-	74LVC1G332GF	CMOS-Log	3-input OR gate	SOT891	52	Log32	9z	Nxp

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
YG	-	74LVC1G332GM	CMOS-Log	3-input OR gate	SOT886	57	Log32	9z	Nxp
YG	-	RP201K141D	LVR-IC	LDO, 1.4V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YH	-	LD6805K/36H	LVR-IC	LDO, 3.6V±3%, 150mA, +CE	DFN1010C-4	48vm	VR4	9z	Nxp
YH	-	RP201K151D	LVR-IC	LDO, 1.5V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YI	-	BU12UA3WNVX	LVR-IC	LDO, 1.2V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
YJ	-	74LVC1G3157GF	CMOS-Log	2-channel analog multiplexer/demultiplexer	SOT891	52	Log38	9z	Nxp
YJ	-	74LVC1G3157GM	CMOS-Log	2-channel analog multiplexer/demultiplexer	SOT886	57	Log38	9z	Nxp
YJ	-	RP201K161D	LVR-IC	LDO, 1.6V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YK	-	74LVC1G58GF	CMOS-Log	Configurable multiple-function gate	SOT891	52	Log37	9z	Nxp
YK	-	74LVC1G58GM	CMOS-Log	Configurable multiple-function gate	SOT886	57	Log37	9z	Nxp
YK	-	RP201K171D	LVR-IC	LDO, 1.7V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
yl	-	BU2HUA3WNVX	LVR-IC	LDO, 2.75V±1%, 300mA, +CE	SSON004X1010	48vm	VR4	9mb	Rhm
YL	-	74LVC1G384GF	CMOS-Log	Bilateral analogic switch	SOT891	52	Log16	9z	Nxp
YL	-	74LVC1G384GM	CMOS-Log	Bilateral analogic switch	SOT886	57	Log16	9z	Nxp
YL	-	RP201K181D	LVR-IC	LDO, 1.8V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YM	-	74LVC1G10GF	CMOS-Log	3-input NAND gate	SOT891	52	Log29	9z	Nxp
YM	-	74LVC1G10GM	CMOS-Log	3-input NAND gate	SOT886	57	Log29	9z	Nxp
YM	-	74LVC1G10GN	CMOS-Log	3-input NAND gate	SOT1115	52	Log29	9z	Nxp
YM	-	74LVC1G10GS	CMOS-Log	3-input NAND gate	SOT1202	52	Log29	9z	Nxp
YM	-	MIC2211-1.9/2.8BML	LVR-IC	LDO, Dual out, Vo1/Vo2=1.9V(150mA)/2.8V(300mA)±1%, +CE	MLF-10	37	VR29	9i	Mcr
YM	-	RP201K191D	LVR-IC	LDO, 1.9V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YN	-	74LVC1G34GF	CMOS-Log	Noninverting buffer	SOT891	52	Log10	9z	Nxp
YN	-	74LVC1G34GM	CMOS-Log	Noninverting buffer	SOT886	57	Log10	9z	Nxp
YN	-	RP201K201D	LVR-IC	LDO, 2.0V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YP	-	74LVC1G157GF	CMOS-Log	2-input multiplexer	SOT891	52	Log42	9z	Nxp
YP	-	74LVC1G157GM	CMOS-Log	2-input multiplexer	SOT886	57	Log42	9z	Nxp
YP	-	LD6805K/36P	LVR-IC	LDO, 3.6V±3%, 150mA, +CE, auto-discharge	DFN1010C-4	48vm	VR4	9z	Nxp
YP	-	RP201K211D	LVR-IC	LDO, 2.1V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YQ	-	RP201K221D	LVR-IC	LDO, 2.2V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YR	-	RP201K231D	LVR-IC	LDO, 2.3V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YS	-	RP201K241D	LVR-IC	LDO, 2.4V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YT	-	74LVC1G175GF	CMOS-Log	Positive edge-triggered D-type flip-flop with reset	SOT891	52	Log40	9z	Nxp
YT	-	74LVC1G175GM	CMOS-Log	Positive edge-triggered D-type flip-flop with reset	SOT886	57	Log40	9z	Nxp
YT	-	RP201K251D	LVR-IC	LDO, 2.5V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YU	-	RP201K261D	LVR-IC	LDO, 2.6V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YV	-	RP201K271D	LVR-IC	LDO, 2.7V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YW	-	RP201K281D	LVR-IC	LDO, 2.8V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YX	-	RP201K291D	LVR-IC	LDO, 2.9V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YY	-	RP201K301D	LVR-IC	LDO, 3.0V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
YZ	-	RP201K311D	LVR-IC	LDO, 3.1V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
Z0A	-	XC6118N50AGR-G	Vdet-IC	5.0V±2%, ±Reset ODO, Sense, hysteresis 5%, Cd	USP-4	45me	VD14	9a	Tor
Z0B	-	XC6118N50BGR-G	Vdet-IC	5.0V±2%, ±Reset ODO, Sense, hysteresis <1%, Cd	USP-4	45me	VD14	9a	Tor
Z0C	-	XC6118N50CGR-G	Vdet-IC	5.0V±2%, ±Reset ODO, Sense, hysteresis 5%	USP-4	45md	VD11	9a	Tor
Z0D	-	XC6118N50DGR-G	Vdet-IC	5.0V±2%, ±Reset ODO, Sense, hysteresis <1%	USP-4	45md	VD11	9a	Tor
Z2	-	74LVC2G04FW4	CMOS-Log	Dual inverters	DFN1010	80	Log24	9u	Di
Z2	-	ZXTP26020DMF	Si-pnp	Sw, Drv, 20V, 1.25A, 1W, B=140..300, 200MHz	DFN1411-3	83ta	-	9y	Zx
Z3	-	74LVC2G06FW4	CMOS-Log	Dual inverter buffers/drivers (ODO)	DFN1010	80	Log25	9u	Di
Z4	-	74AUP2G07FW4	CMOS-Log	Dual noninverting buffers/drivers (ODO)	DFN1010	80	Log26	9u	Di
Z5	-	74LVC2G14FW4	CMOS-Log	Dual Schmitt-trigger inverter buffers	DFN1010	80	Log34	9u	Di
Z6	-	74LVC2G17FW4	CMOS-Log	Dual Schmitt-trigger buffers	DFN1010	80	Log27	9u	Di
Z7	-	74LVC2G34FW4	CMOS-Log	Dual non-inverter buffers	DFN1010	80	Log23	9u	Di
ZA	-	RP201K321D	LVR-IC	LDO, 3.2V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
ZA096	-	XC9225A096D	DC-DC-IC	PWM step-down, 600kHz, 0.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA09C	-	XC9225A09CD	DC-DC-IC	PWM step-down, 1.2MHz, 0.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA0M6	-	XC9225A0M6D	DC-DC-IC	PWM step-down, 600kHz, 0.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA0MC	-	XC9225A0MCD	DC-DC-IC	PWM step-down, 1.2MHz, 0.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA106	-	XC9225A106D	DC-DC-IC	PWM step-down, 600kHz, 1.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA10C	-	XC9225A10CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA116	-	XC9225A116D	DC-DC-IC	PWM step-down, 600kHz, 1.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA11C	-	XC9225A11CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA126	-	XC9225A126D	DC-DC-IC	PWM step-down, 600kHz, 1.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA12C	-	XC9225A12CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA136	-	XC9225A136D	DC-DC-IC	PWM step-down, 600kHz, 1.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA13C	-	XC9225A13CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA146	-	XC9225A146D	DC-DC-IC	PWM step-down, 600kHz, 1.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA14C	-	XC9225A14CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA156	-	XC9225A156D	DC-DC-IC	PWM step-down, 600kHz, 1.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA15C	-	XC9225A15CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA166	-	XC9225A166D	DC-DC-IC	PWM step-down, 600kHz, 1.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA16C	-	XC9225A16CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ZA176	-	XC9225A176D	DC-DC-IC	PWM step-down, 600kHz, 1.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA17C	-	XC9225A17CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA186	-	XC9225A186D	DC-DC-IC	PWM step-down, 600kHz, 1.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA18C	-	XC9225A18CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA196	-	XC9225A196D	DC-DC-IC	PWM step-down, 600kHz, 1.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA19C	-	XC9225A19CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1A6	-	XC9225A1A6D	DC-DC-IC	PWM step-down, 600kHz, 1.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1AC	-	XC9225A1ACD	DC-DC-IC	PWM step-down, 1.2MHz, 1.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1B6	-	XC9225A1B6D	DC-DC-IC	PWM step-down, 600kHz, 1.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1BC	-	XC9225A1BCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1C6	-	XC9225A1C6D	DC-DC-IC	PWM step-down, 600kHz, 1.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1CC	-	XC9225A1CCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1D6	-	XC9225A1D6D	DC-DC-IC	PWM step-down, 600kHz, 1.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1DC	-	XC9225A1DCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1E6	-	XC9225A1E6D	DC-DC-IC	PWM step-down, 600kHz, 1.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1EC	-	XC9225A1ECD	DC-DC-IC	PWM step-down, 1.2MHz, 1.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1F6	-	XC9225A1F6D	DC-DC-IC	PWM step-down, 600kHz, 1.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1FC	-	XC9225A1FCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1H6	-	XC9225A1H6D	DC-DC-IC	PWM step-down, 600kHz, 1.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1HC	-	XC9225A1HCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1K6	-	XC9225A1K6D	DC-DC-IC	PWM step-down, 600kHz, 1.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1KC	-	XC9225A1KCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1L6	-	XC9225A1L6D	DC-DC-IC	PWM step-down, 600kHz, 1.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1LC	-	XC9225A1LCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1M6	-	XC9225A1M6D	DC-DC-IC	PWM step-down, 600kHz, 1.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA1MC	-	XC9225A1MCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA206	-	XC9225A206D	DC-DC-IC	PWM step-down, 600kHz, 2.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA20C	-	XC9225A20CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA216	-	XC9225A216D	DC-DC-IC	PWM step-down, 600kHz, 2.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA21C	-	XC9225A21CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA226	-	XC9225A226D	DC-DC-IC	PWM step-down, 600kHz, 2.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA22C	-	XC9225A22CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA236	-	XC9225A236D	DC-DC-IC	PWM step-down, 600kHz, 2.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA23C	-	XC9225A23CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA246	-	XC9225A246D	DC-DC-IC	PWM step-down, 600kHz, 2.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA24C	-	XC9225A24CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA256	-	XC9225A256D	DC-DC-IC	PWM step-down, 600kHz, 2.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA25C	-	XC9225A25CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA266	-	XC9225A266D	DC-DC-IC	PWM step-down, 600kHz, 2.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA26C	-	XC9225A26CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA276	-	XC9225A276D	DC-DC-IC	PWM step-down, 600kHz, 2.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA27C	-	XC9225A27CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA286	-	XC9225A286D	DC-DC-IC	PWM step-down, 600kHz, 2.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA28C	-	XC9225A28CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA296	-	XC9225A296D	DC-DC-IC	PWM step-down, 600kHz, 2.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA29C	-	XC9225A29CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2A6	-	XC9225A2A6D	DC-DC-IC	PWM step-down, 600kHz, 2.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2AC	-	XC9225A2ACD	DC-DC-IC	PWM step-down, 1.2MHz, 2.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2B6	-	XC9225A2B6D	DC-DC-IC	PWM step-down, 600kHz, 2.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2BC	-	XC9225A2BCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2C6	-	XC9225A2C6D	DC-DC-IC	PWM step-down, 600kHz, 2.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2CC	-	XC9225A2CCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2D6	-	XC9225A2D6D	DC-DC-IC	PWM step-down, 600kHz, 2.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2DC	-	XC9225A2DCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2E6	-	XC9225A2E6D	DC-DC-IC	PWM step-down, 600kHz, 2.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2EC	-	XC9225A2ECD	DC-DC-IC	PWM step-down, 1.2MHz, 2.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2F6	-	XC9225A2F6D	DC-DC-IC	PWM step-down, 600kHz, 2.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2FC	-	XC9225A2FCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2H6	-	XC9225A2H6D	DC-DC-IC	PWM step-down, 600kHz, 2.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2HC	-	XC9225A2HCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2K6	-	XC9225A2K6D	DC-DC-IC	PWM step-down, 600kHz, 2.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2KC	-	XC9225A2KCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2L6	-	XC9225A2L6D	DC-DC-IC	PWM step-down, 600kHz, 2.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2LC	-	XC9225A2LCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2M6	-	XC9225A2M6D	DC-DC-IC	PWM step-down, 600kHz, 2.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA2MC	-	XC9225A2MCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA306	-	XC9225A306D	DC-DC-IC	PWM step-down, 600kHz, 3.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA30C	-	XC9225A30CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA316	-	XC9225A316D	DC-DC-IC	PWM step-down, 600kHz, 3.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA31C	-	XC9225A31CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ZA326	-	XC9225A326D	DC-DC-IC	PWM step-down, 600kHz, 3.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA32C	-	XC9225A32CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA336	-	XC9225A336D	DC-DC-IC	PWM step-down, 600kHz, 3.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA33C	-	XC9225A33CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA346	-	XC9225A346D	DC-DC-IC	PWM step-down, 600kHz, 3.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA34C	-	XC9225A34CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA356	-	XC9225A356D	DC-DC-IC	PWM step-down, 600kHz, 3.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA35C	-	XC9225A35CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA366	-	XC9225A366D	DC-DC-IC	PWM step-down, 600kHz, 3.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA36C	-	XC9225A36CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA376	-	XC9225A376D	DC-DC-IC	PWM step-down, 600kHz, 3.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA37C	-	XC9225A37CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA386	-	XC9225A386D	DC-DC-IC	PWM step-down, 600kHz, 3.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA38C	-	XC9225A38CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA396	-	XC9225A396D	DC-DC-IC	PWM step-down, 600kHz, 3.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA39C	-	XC9225A39CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3A6	-	XC9225A3A6D	DC-DC-IC	PWM step-down, 600kHz, 3.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3AC	-	XC9225A3ACD	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3B6	-	XC9225A3B6D	DC-DC-IC	PWM step-down, 600kHz, 3.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3BC	-	XC9225A3BCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3C6	-	XC9225A3C6D	DC-DC-IC	PWM step-down, 600kHz, 3.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3CC	-	XC9225A3CCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3D6	-	XC9225A3D6D	DC-DC-IC	PWM step-down, 600kHz, 3.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3DC	-	XC9225A3DCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3E6	-	XC9225A3E6D	DC-DC-IC	PWM step-down, 600kHz, 3.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3EC	-	XC9225A3ECD	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3F6	-	XC9225A3F6D	DC-DC-IC	PWM step-down, 600kHz, 3.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3FC	-	XC9225A3FCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3H6	-	XC9225A3H6D	DC-DC-IC	PWM step-down, 600kHz, 3.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3HC	-	XC9225A3HCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3K6	-	XC9225A3K6D	DC-DC-IC	PWM step-down, 600kHz, 3.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3KC	-	XC9225A3KCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3L6	-	XC9225A3L6D	DC-DC-IC	PWM step-down, 600kHz, 3.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3LC	-	XC9225A3LCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3M6	-	XC9225A3M6D	DC-DC-IC	PWM step-down, 600kHz, 3.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA3MC	-	XC9225A3MCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA406	-	XC9225A406D	DC-DC-IC	PWM step-down, 600kHz, 4.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZA40C	-	XC9225A40CD	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±1%, 600mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZB	-	RP201K331D	LVR-IC	LDO, 3.3V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
ZB096	-	XC9225B096D	DC-DC-IC	PWM step-down, 600kHz, 0.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB09C	-	XC9225B09CD	DC-DC-IC	PWM step-down, 1.2MHz, 0.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB0M6	-	XC9225B0M6D	DC-DC-IC	PWM step-down, 600kHz, 0.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB0MC	-	XC9225B0MCD	DC-DC-IC	PWM step-down, 1.2MHz, 0.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB106	-	XC9225B106D	DC-DC-IC	PWM step-down, 600kHz, 1.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB10C	-	XC9225B10CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB116	-	XC9225B116D	DC-DC-IC	PWM step-down, 600kHz, 1.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB11C	-	XC9225B11CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB126	-	XC9225B126D	DC-DC-IC	PWM step-down, 600kHz, 1.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB12C	-	XC9225B12CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB136	-	XC9225B136D	DC-DC-IC	PWM step-down, 600kHz, 1.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB13C	-	XC9225B13CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB146	-	XC9225B146D	DC-DC-IC	PWM step-down, 600kHz, 1.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB14C	-	XC9225B14CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB156	-	XC9225B156D	DC-DC-IC	PWM step-down, 600kHz, 1.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB15C	-	XC9225B15CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB166	-	XC9225B166D	DC-DC-IC	PWM step-down, 600kHz, 1.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB16C	-	XC9225B16CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB176	-	XC9225B176D	DC-DC-IC	PWM step-down, 600kHz, 1.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB17C	-	XC9225B17CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB186	-	XC9225B186D	DC-DC-IC	PWM step-down, 600kHz, 1.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB18C	-	XC9225B18CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB196	-	XC9225B196D	DC-DC-IC	PWM step-down, 600kHz, 1.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB19C	-	XC9225B19CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1A6	-	XC9225B1A6D	DC-DC-IC	PWM step-down, 600kHz, 1.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1AC	-	XC9225B1ACD	DC-DC-IC	PWM step-down, 1.2MHz, 1.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1B6	-	XC9225B1B6D	DC-DC-IC	PWM step-down, 600kHz, 1.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1BC	-	XC9225B1BCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1C6	-	XC9225B1C6D	DC-DC-IC	PWM step-down, 600kHz, 1.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1CC	-	XC9225B1CCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1D6	-	XC9225B1D6D	DC-DC-IC	PWM step-down, 600kHz, 1.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ZB1DC	-	XC9225B1DCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1E6	-	XC9225B1E6D	DC-DC-IC	PWM step-down, 600kHz, 1.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1EC	-	XC9225B1ECD	DC-DC-IC	PWM step-down, 1.2MHz, 1.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1F6	-	XC9225B1F6D	DC-DC-IC	PWM step-down, 600kHz, 1.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1FC	-	XC9225B1FCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1H6	-	XC9225B1H6D	DC-DC-IC	PWM step-down, 600kHz, 1.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1HC	-	XC9225B1HCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1K6	-	XC9225B1K6D	DC-DC-IC	PWM step-down, 600kHz, 1.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1KC	-	XC9225B1KCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1L6	-	XC9225B1L6D	DC-DC-IC	PWM step-down, 600kHz, 1.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1LC	-	XC9225B1LCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1M6	-	XC9225B1M6D	DC-DC-IC	PWM step-down, 600kHz, 1.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB1MC	-	XC9225B1MCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB206	-	XC9225B206D	DC-DC-IC	PWM step-down, 600kHz, 2.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB20C	-	XC9225B20CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB216	-	XC9225B216D	DC-DC-IC	PWM step-down, 600kHz, 2.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB21C	-	XC9225B21CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB226	-	XC9225B226D	DC-DC-IC	PWM step-down, 600kHz, 2.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB22C	-	XC9225B22CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB236	-	XC9225B236D	DC-DC-IC	PWM step-down, 600kHz, 2.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB23C	-	XC9225B23CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB246	-	XC9225B246D	DC-DC-IC	PWM step-down, 600kHz, 2.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB24C	-	XC9225B24CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB256	-	XC9225B256D	DC-DC-IC	PWM step-down, 600kHz, 2.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB25C	-	XC9225B25CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB266	-	XC9225B266D	DC-DC-IC	PWM step-down, 600kHz, 2.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB26C	-	XC9225B26CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB276	-	XC9225B276D	DC-DC-IC	PWM step-down, 600kHz, 2.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB27C	-	XC9225B27CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB286	-	XC9225B286D	DC-DC-IC	PWM step-down, 600kHz, 2.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB28C	-	XC9225B28CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB296	-	XC9225B296D	DC-DC-IC	PWM step-down, 600kHz, 2.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB29C	-	XC9225B29CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2A6	-	XC9225B2A6D	DC-DC-IC	PWM step-down, 600kHz, 2.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2AC	-	XC9225B2ACD	DC-DC-IC	PWM step-down, 1.2MHz, 2.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2B6	-	XC9225B2B6D	DC-DC-IC	PWM step-down, 600kHz, 2.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2BC	-	XC9225B2BCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2C6	-	XC9225B2C6D	DC-DC-IC	PWM step-down, 600kHz, 2.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2CC	-	XC9225B2CCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2D6	-	XC9225B2D6D	DC-DC-IC	PWM step-down, 600kHz, 2.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2DC	-	XC9225B2DCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2E6	-	XC9225B2E6D	DC-DC-IC	PWM step-down, 600kHz, 2.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2EC	-	XC9225B2ECD	DC-DC-IC	PWM step-down, 1.2MHz, 2.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2F6	-	XC9225B2F6D	DC-DC-IC	PWM step-down, 600kHz, 2.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2FC	-	XC9225B2FCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2H6	-	XC9225B2H6D	DC-DC-IC	PWM step-down, 600kHz, 2.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2HC	-	XC9225B2HCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2K6	-	XC9225B2K6D	DC-DC-IC	PWM step-down, 600kHz, 2.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2KC	-	XC9225B2KCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2L6	-	XC9225B2L6D	DC-DC-IC	PWM step-down, 600kHz, 2.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2LC	-	XC9225B2LCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2M6	-	XC9225B2M6D	DC-DC-IC	PWM step-down, 600kHz, 2.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB2MC	-	XC9225B2MCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB306	-	XC9225B306D	DC-DC-IC	PWM step-down, 600kHz, 3.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB30C	-	XC9225B30CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB316	-	XC9225B316D	DC-DC-IC	PWM step-down, 600kHz, 3.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB31C	-	XC9225B31CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB326	-	XC9225B326D	DC-DC-IC	PWM step-down, 600kHz, 3.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB32C	-	XC9225B32CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB336	-	XC9225B336D	DC-DC-IC	PWM step-down, 600kHz, 3.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB33C	-	XC9225B33CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB346	-	XC9225B346D	DC-DC-IC	PWM step-down, 600kHz, 3.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB34C	-	XC9225B34CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB356	-	XC9225B356D	DC-DC-IC	PWM step-down, 600kHz, 3.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB35C	-	XC9225B35CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB366	-	XC9225B366D	DC-DC-IC	PWM step-down, 600kHz, 3.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB36C	-	XC9225B36CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB376	-	XC9225B376D	DC-DC-IC	PWM step-down, 600kHz, 3.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB37C	-	XC9225B37CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB386	-	XC9225B386D	DC-DC-IC	PWM step-down, 600kHz, 3.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ZB38C	-	XC9225B38CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB396	-	XC9225B396D	DC-DC-IC	PWM step-down, 600kHz, 3.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB39C	-	XC9225B39CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3A6	-	XC9225B3A6D	DC-DC-IC	PWM step-down, 600kHz, 3.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3AC	-	XC9225B3ACD	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3B6	-	XC9225B3B6D	DC-DC-IC	PWM step-down, 600kHz, 3.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3BC	-	XC9225B3BCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3C6	-	XC9225B3C6D	DC-DC-IC	PWM step-down, 600kHz, 3.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3CC	-	XC9225B3CCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3D6	-	XC9225B3D6D	DC-DC-IC	PWM step-down, 600kHz, 3.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3DC	-	XC9225B3DCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3E6	-	XC9225B3E6D	DC-DC-IC	PWM step-down, 600kHz, 3.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3EC	-	XC9225B3ECD	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3F6	-	XC9225B3F6D	DC-DC-IC	PWM step-down, 600kHz, 3.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3FC	-	XC9225B3FCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3H6	-	XC9225B3H6D	DC-DC-IC	PWM step-down, 600kHz, 3.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3HC	-	XC9225B3HCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3K6	-	XC9225B3K6D	DC-DC-IC	PWM step-down, 600kHz, 3.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3KC	-	XC9225B3KCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3L6	-	XC9225B3L6D	DC-DC-IC	PWM step-down, 600kHz, 3.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3LC	-	XC9225B3LCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3M6	-	XC9225B3M6D	DC-DC-IC	PWM step-down, 600kHz, 3.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB3MC	-	XC9225B3MCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB406	-	XC9225B406D	DC-DC-IC	PWM step-down, 600kHz, 4.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZB40C	-	XC9225B40CD	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±1%, 600mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZBM•	mi	NCP2820MUTBG	Lin-IC	AF PA, BTL, class-D, 2.2..5.5V, 2.65W(4Ω), shutdown	DFN-8	92	-	9o	Ons
ZC	-	CHT847BM1PT-S	Si-npn	AF, Sw, 45V, 100mA, B=420..800, 200MHz	FBPT-723	17ta	-	9a	Chm
ZC	-	RP201K341D	LVR-IC	LDO, 3.4V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
ZC096	-	XC9225C096D	DC-DC-IC	PWM step-down, 600kHz, 0.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC09C	-	XC9225C09CD	DC-DC-IC	PWM step-down, 1.2MHz, 0.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC0M6	-	XC9225C0M6D	DC-DC-IC	PWM step-down, 600kHz, 0.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC0MC	-	XC9225C0MCD	DC-DC-IC	PWM step-down, 1.2MHz, 0.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC106	-	XC9225C106D	DC-DC-IC	PWM step-down, 600kHz, 1.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC10C	-	XC9225C10CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC116	-	XC9225C116D	DC-DC-IC	PWM step-down, 600kHz, 1.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC11C	-	XC9225C11CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC126	-	XC9225C126D	DC-DC-IC	PWM step-down, 600kHz, 1.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC12C	-	XC9225C12CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC136	-	XC9225C136D	DC-DC-IC	PWM step-down, 600kHz, 1.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC13C	-	XC9225C13CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC146	-	XC9225C146D	DC-DC-IC	PWM step-down, 600kHz, 1.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC14C	-	XC9225C14CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC156	-	XC9225C156D	DC-DC-IC	PWM step-down, 600kHz, 1.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC15C	-	XC9225C15CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC166	-	XC9225C166D	DC-DC-IC	PWM step-down, 600kHz, 1.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC16C	-	XC9225C16CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC176	-	XC9225C176D	DC-DC-IC	PWM step-down, 600kHz, 1.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC17C	-	XC9225C17CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC186	-	XC9225C186D	DC-DC-IC	PWM step-down, 600kHz, 1.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC18C	-	XC9225C18CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC196	-	XC9225C196D	DC-DC-IC	PWM step-down, 600kHz, 1.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC19C	-	XC9225C19CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1A6	-	XC9225C1A6D	DC-DC-IC	PWM step-down, 600kHz, 1.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1AC	-	XC9225C1ACD	DC-DC-IC	PWM step-down, 1.2MHz, 1.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1B6	-	XC9225C1B6D	DC-DC-IC	PWM step-down, 600kHz, 1.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1BC	-	XC9225C1BCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1C6	-	XC9225C1C6D	DC-DC-IC	PWM step-down, 600kHz, 1.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1CC	-	XC9225C1CCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1D6	-	XC9225C1D6D	DC-DC-IC	PWM step-down, 600kHz, 1.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1DC	-	XC9225C1DCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1E6	-	XC9225C1E6D	DC-DC-IC	PWM step-down, 600kHz, 1.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1EC	-	XC9225C1ECD	DC-DC-IC	PWM step-down, 1.2MHz, 1.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1F6	-	XC9225C1F6D	DC-DC-IC	PWM step-down, 600kHz, 1.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1FC	-	XC9225C1FCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1H6	-	XC9225C1H6D	DC-DC-IC	PWM step-down, 600kHz, 1.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1HC	-	XC9225C1HCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1K6	-	XC9225C1K6D	DC-DC-IC	PWM step-down, 600kHz, 1.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1KC	-	XC9225C1KCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1L6	-	XC9225C1L6D	DC-DC-IC	PWM step-down, 600kHz, 1.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1LC	-	XC9225C1LCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ZC1M6	-	XC9225C1M6D	DC-DC-IC	PWM step-down, 600kHz, 1.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC1MC	-	XC9225C1MCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC206	-	XC9225C206D	DC-DC-IC	PWM step-down, 600kHz, 2.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC20C	-	XC9225C20CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC216	-	XC9225C216D	DC-DC-IC	PWM step-down, 600kHz, 2.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC21C	-	XC9225C21CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC226	-	XC9225C226D	DC-DC-IC	PWM step-down, 600kHz, 2.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC22C	-	XC9225C22CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC236	-	XC9225C236D	DC-DC-IC	PWM step-down, 600kHz, 2.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC23C	-	XC9225C23CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC246	-	XC9225C246D	DC-DC-IC	PWM step-down, 600kHz, 2.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC24C	-	XC9225C24CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC256	-	XC9225C256D	DC-DC-IC	PWM step-down, 600kHz, 2.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC25C	-	XC9225C25CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC266	-	XC9225C266D	DC-DC-IC	PWM step-down, 600kHz, 2.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC26C	-	XC9225C26CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC276	-	XC9225C276D	DC-DC-IC	PWM step-down, 600kHz, 2.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC27C	-	XC9225C27CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC286	-	XC9225C286D	DC-DC-IC	PWM step-down, 600kHz, 2.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC28C	-	XC9225C28CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC296	-	XC9225C296D	DC-DC-IC	PWM step-down, 600kHz, 2.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC29C	-	XC9225C29CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2A6	-	XC9225C2A6D	DC-DC-IC	PWM step-down, 600kHz, 2.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2AC	-	XC9225C2ACD	DC-DC-IC	PWM step-down, 1.2MHz, 2.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2B6	-	XC9225C2B6D	DC-DC-IC	PWM step-down, 600kHz, 2.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2BC	-	XC9225C2BCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2C6	-	XC9225C2C6D	DC-DC-IC	PWM step-down, 600kHz, 2.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2CC	-	XC9225C2CCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2D6	-	XC9225C2D6D	DC-DC-IC	PWM step-down, 600kHz, 2.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2DC	-	XC9225C2DCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2E6	-	XC9225C2E6D	DC-DC-IC	PWM step-down, 600kHz, 2.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2EC	-	XC9225C2ECD	DC-DC-IC	PWM step-down, 1.2MHz, 2.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2F6	-	XC9225C2F6D	DC-DC-IC	PWM step-down, 600kHz, 2.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2FC	-	XC9225C2FCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2H6	-	XC9225C2H6D	DC-DC-IC	PWM step-down, 600kHz, 2.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2HC	-	XC9225C2HCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2K6	-	XC9225C2K6D	DC-DC-IC	PWM step-down, 600kHz, 2.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2KC	-	XC9225C2KCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2L6	-	XC9225C2L6D	DC-DC-IC	PWM step-down, 600kHz, 2.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2LC	-	XC9225C2LCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2M6	-	XC9225C2M6D	DC-DC-IC	PWM step-down, 600kHz, 2.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC2MC	-	XC9225C2MCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC306	-	XC9225C306D	DC-DC-IC	PWM step-down, 600kHz, 3.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC30C	-	XC9225C30CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC316	-	XC9225C316D	DC-DC-IC	PWM step-down, 600kHz, 3.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC31C	-	XC9225C31CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC326	-	XC9225C326D	DC-DC-IC	PWM step-down, 600kHz, 3.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC32C	-	XC9225C32CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC336	-	XC9225C336D	DC-DC-IC	PWM step-down, 600kHz, 3.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC33C	-	XC9225C33CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC346	-	XC9225C346D	DC-DC-IC	PWM step-down, 600kHz, 3.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC34C	-	XC9225C34CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC356	-	XC9225C356D	DC-DC-IC	PWM step-down, 600kHz, 3.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC35C	-	XC9225C35CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC366	-	XC9225C366D	DC-DC-IC	PWM step-down, 600kHz, 3.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC36C	-	XC9225C36CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC376	-	XC9225C376D	DC-DC-IC	PWM step-down, 600kHz, 3.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC37C	-	XC9225C37CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC386	-	XC9225C386D	DC-DC-IC	PWM step-down, 600kHz, 3.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC38C	-	XC9225C38CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC396	-	XC9225C396D	DC-DC-IC	PWM step-down, 600kHz, 3.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC39C	-	XC9225C39CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3A6	-	XC9225C3A6D	DC-DC-IC	PWM step-down, 600kHz, 3.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3AC	-	XC9225C3ACD	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3B6	-	XC9225C3B6D	DC-DC-IC	PWM step-down, 600kHz, 3.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3BC	-	XC9225C3BCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3C6	-	XC9225C3C6D	DC-DC-IC	PWM step-down, 600kHz, 3.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3CC	-	XC9225C3CCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3D6	-	XC9225C3D6D	DC-DC-IC	PWM step-down, 600kHz, 3.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3DC	-	XC9225C3DCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ZC3E6	-	XC9225C3E6D	DC-DC-IC	PWM step-down, 600kHz, 3.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3EC	-	XC9225C3ECD	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3F6	-	XC9225C3F6D	DC-DC-IC	PWM step-down, 600kHz, 3.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3FC	-	XC9225C3FCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3H6	-	XC9225C3H6D	DC-DC-IC	PWM step-down, 600kHz, 3.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3HC	-	XC9225C3HCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3K6	-	XC9225C3K6D	DC-DC-IC	PWM step-down, 600kHz, 3.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3KC	-	XC9225C3KCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3L6	-	XC9225C3L6D	DC-DC-IC	PWM step-down, 600kHz, 3.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3LC	-	XC9225C3LCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3M6	-	XC9225C3M6D	DC-DC-IC	PWM step-down, 600kHz, 3.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC3MC	-	XC9225C3MCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC406	-	XC9225C406D	DC-DC-IC	PWM step-down, 600kHz, 4.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZC40C	-	XC9225C40CD	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±1%, 600mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZD	-	RP201K351D	LVR-IC	LDO, 3.5V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
ZD096	-	XC9225D096D	DC-DC-IC	PWM step-down, 600kHz, 0.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD09C	-	XC9225D09CD	DC-DC-IC	PWM step-down, 1.2MHz, 0.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD0M6	-	XC9225D0M6D	DC-DC-IC	PWM step-down, 600kHz, 0.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD0MC	-	XC9225D0MCD	DC-DC-IC	PWM step-down, 1.2MHz, 0.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD106	-	XC9225D106D	DC-DC-IC	PWM step-down, 600kHz, 1.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD10C	-	XC9225D10CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD116	-	XC9225D116D	DC-DC-IC	PWM step-down, 600kHz, 1.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD11C	-	XC9225D11CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD126	-	XC9225D126D	DC-DC-IC	PWM step-down, 600kHz, 1.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD12C	-	XC9225D12CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD136	-	XC9225D136D	DC-DC-IC	PWM step-down, 600kHz, 1.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD13C	-	XC9225D13CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD146	-	XC9225D146D	DC-DC-IC	PWM step-down, 600kHz, 1.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD14C	-	XC9225D14CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD156	-	XC9225D156D	DC-DC-IC	PWM step-down, 600kHz, 1.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD15C	-	XC9225D15CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD166	-	XC9225D166D	DC-DC-IC	PWM step-down, 600kHz, 1.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD16C	-	XC9225D16CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD176	-	XC9225D176D	DC-DC-IC	PWM step-down, 600kHz, 1.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD17C	-	XC9225D17CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD186	-	XC9225D186D	DC-DC-IC	PWM step-down, 600kHz, 1.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD18C	-	XC9225D18CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD196	-	XC9225D196D	DC-DC-IC	PWM step-down, 600kHz, 1.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD19C	-	XC9225D19CD	DC-DC-IC	PWM step-down, 1.2MHz, 1.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1A6	-	XC9225D1A6D	DC-DC-IC	PWM step-down, 600kHz, 1.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1AC	-	XC9225D1ACD	DC-DC-IC	PWM step-down, 1.2MHz, 1.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1B6	-	XC9225D1B6D	DC-DC-IC	PWM step-down, 600kHz, 1.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1BC	-	XC9225D1BCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1C6	-	XC9225D1C6D	DC-DC-IC	PWM step-down, 600kHz, 1.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1CC	-	XC9225D1CCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1D6	-	XC9225D1D6D	DC-DC-IC	PWM step-down, 600kHz, 1.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1DC	-	XC9225D1DCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1E6	-	XC9225D1E6D	DC-DC-IC	PWM step-down, 600kHz, 1.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1EC	-	XC9225D1ECD	DC-DC-IC	PWM step-down, 1.2MHz, 1.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1F6	-	XC9225D1F6D	DC-DC-IC	PWM step-down, 600kHz, 1.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1FC	-	XC9225D1FCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1H6	-	XC9225D1H6D	DC-DC-IC	PWM step-down, 600kHz, 1.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1HC	-	XC9225D1HCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1K6	-	XC9225D1K6D	DC-DC-IC	PWM step-down, 600kHz, 1.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1KC	-	XC9225D1KCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1L6	-	XC9225D1L6D	DC-DC-IC	PWM step-down, 600kHz, 1.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1LC	-	XC9225D1LCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1M6	-	XC9225D1M6D	DC-DC-IC	PWM step-down, 600kHz, 1.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD1MC	-	XC9225D1MCD	DC-DC-IC	PWM step-down, 1.2MHz, 1.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD206	-	XC9225D206D	DC-DC-IC	PWM step-down, 600kHz, 2.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD20C	-	XC9225D20CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD216	-	XC9225D216D	DC-DC-IC	PWM step-down, 600kHz, 2.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD21C	-	XC9225D21CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD226	-	XC9225D226D	DC-DC-IC	PWM step-down, 600kHz, 2.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD22C	-	XC9225D22CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD236	-	XC9225D236D	DC-DC-IC	PWM step-down, 600kHz, 2.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD23C	-	XC9225D23CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD246	-	XC9225D246D	DC-DC-IC	PWM step-down, 600kHz, 2.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD24C	-	XC9225D24CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD256	-	XC9225D256D	DC-DC-IC	PWM step-down, 600kHz, 2.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ZD25C	-	XC9225D25CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD266	-	XC9225D266D	DC-DC-IC	PWM step-down, 600kHz, 2.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD26C	-	XC9225D26CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD276	-	XC9225D276D	DC-DC-IC	PWM step-down, 600kHz, 2.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD27C	-	XC9225D27CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD286	-	XC9225D286D	DC-DC-IC	PWM step-down, 600kHz, 2.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD28C	-	XC9225D28CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD296	-	XC9225D296D	DC-DC-IC	PWM step-down, 600kHz, 2.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD29C	-	XC9225D29CD	DC-DC-IC	PWM step-down, 1.2MHz, 2.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2A6	-	XC9225D2A6D	DC-DC-IC	PWM step-down, 600kHz, 2.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2AC	-	XC9225D2ACD	DC-DC-IC	PWM step-down, 1.2MHz, 2.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2B6	-	XC9225D2B6D	DC-DC-IC	PWM step-down, 600kHz, 2.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2BC	-	XC9225D2BCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2C6	-	XC9225D2C6D	DC-DC-IC	PWM step-down, 600kHz, 2.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2CC	-	XC9225D2CCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2D6	-	XC9225D2D6D	DC-DC-IC	PWM step-down, 600kHz, 2.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2DC	-	XC9225D2DCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2E6	-	XC9225D2E6D	DC-DC-IC	PWM step-down, 600kHz, 2.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2EC	-	XC9225D2ECD	DC-DC-IC	PWM step-down, 1.2MHz, 2.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2F6	-	XC9225D2F6D	DC-DC-IC	PWM step-down, 600kHz, 2.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2FC	-	XC9225D2FCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2H6	-	XC9225D2H6D	DC-DC-IC	PWM step-down, 600kHz, 2.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2HC	-	XC9225D2HCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2K6	-	XC9225D2K6D	DC-DC-IC	PWM step-down, 600kHz, 2.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2KC	-	XC9225D2KCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2L6	-	XC9225D2L6D	DC-DC-IC	PWM step-down, 600kHz, 2.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2LC	-	XC9225D2LCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2M6	-	XC9225D2M6D	DC-DC-IC	PWM step-down, 600kHz, 2.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD2MC	-	XC9225D2MCD	DC-DC-IC	PWM step-down, 1.2MHz, 2.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD306	-	XC9225D306D	DC-DC-IC	PWM step-down, 600kHz, 3.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD30C	-	XC9225D30CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD316	-	XC9225D316D	DC-DC-IC	PWM step-down, 600kHz, 3.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD31C	-	XC9225D31CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD326	-	XC9225D326D	DC-DC-IC	PWM step-down, 600kHz, 3.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD32C	-	XC9225D32CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD336	-	XC9225D336D	DC-DC-IC	PWM step-down, 600kHz, 3.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD33C	-	XC9225D33CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD346	-	XC9225D346D	DC-DC-IC	PWM step-down, 600kHz, 3.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD34C	-	XC9225D34CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD356	-	XC9225D356D	DC-DC-IC	PWM step-down, 600kHz, 3.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD35C	-	XC9225D35CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD366	-	XC9225D366D	DC-DC-IC	PWM step-down, 600kHz, 3.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD36C	-	XC9225D36CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD376	-	XC9225D376D	DC-DC-IC	PWM step-down, 600kHz, 3.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD37C	-	XC9225D37CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD386	-	XC9225D386D	DC-DC-IC	PWM step-down, 600kHz, 3.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD38C	-	XC9225D38CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD396	-	XC9225D396D	DC-DC-IC	PWM step-down, 600kHz, 3.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD39C	-	XC9225D39CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3A6	-	XC9225D3A6D	DC-DC-IC	PWM step-down, 600kHz, 3.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3AC	-	XC9225D3ACD	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3B6	-	XC9225D3B6D	DC-DC-IC	PWM step-down, 600kHz, 3.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3BC	-	XC9225D3BCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3C6	-	XC9225D3C6D	DC-DC-IC	PWM step-down, 600kHz, 3.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3CC	-	XC9225D3CCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3D6	-	XC9225D3D6D	DC-DC-IC	PWM step-down, 600kHz, 3.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3DC	-	XC9225D3DCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3E6	-	XC9225D3E6D	DC-DC-IC	PWM step-down, 600kHz, 3.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3EC	-	XC9225D3ECD	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3F6	-	XC9225D3F6D	DC-DC-IC	PWM step-down, 600kHz, 3.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3FC	-	XC9225D3FCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3H6	-	XC9225D3H6D	DC-DC-IC	PWM step-down, 600kHz, 3.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3HC	-	XC9225D3HCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3K6	-	XC9225D3K6D	DC-DC-IC	PWM step-down, 600kHz, 3.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3KC	-	XC9225D3KCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3L6	-	XC9225D3L6D	DC-DC-IC	PWM step-down, 600kHz, 3.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3LC	-	XC9225D3LCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3M6	-	XC9225D3M6D	DC-DC-IC	PWM step-down, 600kHz, 3.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD3MC	-	XC9225D3MCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZD406	-	XC9225D406D	DC-DC-IC	PWM step-down, 600kHz, 4.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ZD40C	-	XC9225D40CD	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±1%, 600mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZE	-	RP201K361D	LVR-IC	LDO, 3.6V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
ZE306	-	XC9225E306D	DC-DC-IC	PWM step-down, 600kHz, 3.0V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE30C	-	XC9225E30CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE316	-	XC9225E316D	DC-DC-IC	PWM step-down, 600kHz, 3.1V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE31C	-	XC9225E31CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE326	-	XC9225E326D	DC-DC-IC	PWM step-down, 600kHz, 3.2V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE32C	-	XC9225E32CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE336	-	XC9225E336D	DC-DC-IC	PWM step-down, 600kHz, 3.3V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE33C	-	XC9225E33CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE346	-	XC9225E346D	DC-DC-IC	PWM step-down, 600kHz, 3.4V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE34C	-	XC9225E34CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE356	-	XC9225E356D	DC-DC-IC	PWM step-down, 600kHz, 3.5V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE35C	-	XC9225E35CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE366	-	XC9225E366D	DC-DC-IC	PWM step-down, 600kHz, 3.6V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE36C	-	XC9225E36CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE376	-	XC9225E376D	DC-DC-IC	PWM step-down, 600kHz, 3.7V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE37C	-	XC9225E37CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE386	-	XC9225E386D	DC-DC-IC	PWM step-down, 600kHz, 3.8V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE38C	-	XC9225E38CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE396	-	XC9225E396D	DC-DC-IC	PWM step-down, 600kHz, 3.9V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE39C	-	XC9225E39CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3A6	-	XC9225E3A6D	DC-DC-IC	PWM step-down, 600kHz, 3.05V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3AC	-	XC9225E3ACD	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3B6	-	XC9225E3B6D	DC-DC-IC	PWM step-down, 600kHz, 3.15V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3BC	-	XC9225E3BCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3C6	-	XC9225E3C6D	DC-DC-IC	PWM step-down, 600kHz, 3.25V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3CC	-	XC9225E3CCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3D6	-	XC9225E3D6D	DC-DC-IC	PWM step-down, 600kHz, 3.35V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3DC	-	XC9225E3DCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3E6	-	XC9225E3E6D	DC-DC-IC	PWM step-down, 600kHz, 3.45V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3EC	-	XC9225E3ECD	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3F6	-	XC9225E3F6D	DC-DC-IC	PWM step-down, 600kHz, 3.55V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3FC	-	XC9225E3FCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3H6	-	XC9225E3H6D	DC-DC-IC	PWM step-down, 600kHz, 3.65V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3HC	-	XC9225E3HCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3K6	-	XC9225E3K6D	DC-DC-IC	PWM step-down, 600kHz, 3.75V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3KC	-	XC9225E3KCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3L6	-	XC9225E3L6D	DC-DC-IC	PWM step-down, 600kHz, 3.85V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3LC	-	XC9225E3LCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3M6	-	XC9225E3M6D	DC-DC-IC	PWM step-down, 600kHz, 3.95V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE3MC	-	XC9225E3MCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE406	-	XC9225E406D	DC-DC-IC	PWM step-down, 600kHz, 4.0V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZE40C	-	XC9225E40CD	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±1%, 900mA, +CE	USP-6B	49dc5	DC1	9b	Tor
ZF	-	RP201K371D	LVR-IC	LDO, 3.7V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
ZF306	-	XC9225F306D	DC-DC-IC	PWM step-down, 600kHz, 3.0V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF30C	-	XC9225F30CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF316	-	XC9225F316D	DC-DC-IC	PWM step-down, 600kHz, 3.1V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF31C	-	XC9225F31CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF326	-	XC9225F326D	DC-DC-IC	PWM step-down, 600kHz, 3.2V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF32C	-	XC9225F32CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF336	-	XC9225F336D	DC-DC-IC	PWM step-down, 600kHz, 3.3V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF33C	-	XC9225F33CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF346	-	XC9225F346D	DC-DC-IC	PWM step-down, 600kHz, 3.4V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF34C	-	XC9225F34CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF356	-	XC9225F356D	DC-DC-IC	PWM step-down, 600kHz, 3.5V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF35C	-	XC9225F35CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF366	-	XC9225F366D	DC-DC-IC	PWM step-down, 600kHz, 3.6V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF36C	-	XC9225F36CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF376	-	XC9225F376D	DC-DC-IC	PWM step-down, 600kHz, 3.7V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF37C	-	XC9225F37CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF386	-	XC9225F386D	DC-DC-IC	PWM step-down, 600kHz, 3.8V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF38C	-	XC9225F38CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF396	-	XC9225F396D	DC-DC-IC	PWM step-down, 600kHz, 3.9V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF39C	-	XC9225F39CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3A6	-	XC9225F3A6D	DC-DC-IC	PWM step-down, 600kHz, 3.05V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3AC	-	XC9225F3ACD	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3B6	-	XC9225F3B6D	DC-DC-IC	PWM step-down, 600kHz, 3.15V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3BC	-	XC9225F3BCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3C6	-	XC9225F3C6D	DC-DC-IC	PWM step-down, 600kHz, 3.25V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ZF3CC	-	XC9225F3CCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3D6	-	XC9225F3D6D	DC-DC-IC	PWM step-down, 600kHz, 3.35V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3DC	-	XC9225F3DCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3E6	-	XC9225F3E6D	DC-DC-IC	PWM step-down, 600kHz, 3.45V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3EC	-	XC9225F3ECD	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3F6	-	XC9225F3F6D	DC-DC-IC	PWM step-down, 600kHz, 3.55V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3FC	-	XC9225F3FCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3H6	-	XC9225F3H6D	DC-DC-IC	PWM step-down, 600kHz, 3.65V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3HC	-	XC9225F3HCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3K6	-	XC9225F3K6D	DC-DC-IC	PWM step-down, 600kHz, 3.75V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3KC	-	XC9225F3KCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3L6	-	XC9225F3L6D	DC-DC-IC	PWM step-down, 600kHz, 3.85V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3LC	-	XC9225F3LCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3M6	-	XC9225F3M6D	DC-DC-IC	PWM step-down, 600kHz, 3.95V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF3MC	-	XC9225F3MCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF406	-	XC9225F406D	DC-DC-IC	PWM step-down, 600kHz, 4.0V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZF40C	-	XC9225F40CD	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±1%, 900mA, -CE	USP-6B	49dc5	DC1	9b	Tor
ZG	-	RP201K381D	LVR-IC	LDO, 3.8V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
ZH	-	RP201K391D	LVR-IC	LDO, 3.9V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
ZH306	-	XC9225H306D	DC-DC-IC	PWM step-down, 600kHz, 3.0V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH30C	-	XC9225H30CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH316	-	XC9225H316D	DC-DC-IC	PWM step-down, 600kHz, 3.1V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH31C	-	XC9225H31CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH326	-	XC9225H326D	DC-DC-IC	PWM step-down, 600kHz, 3.2V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH32C	-	XC9225H32CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH336	-	XC9225H336D	DC-DC-IC	PWM step-down, 600kHz, 3.3V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH33C	-	XC9225H33CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH346	-	XC9225H346D	DC-DC-IC	PWM step-down, 600kHz, 3.4V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH34C	-	XC9225H34CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH356	-	XC9225H356D	DC-DC-IC	PWM step-down, 600kHz, 3.5V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH35C	-	XC9225H35CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH366	-	XC9225H366D	DC-DC-IC	PWM step-down, 600kHz, 3.6V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH36C	-	XC9225H36CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH376	-	XC9225H376D	DC-DC-IC	PWM step-down, 600kHz, 3.7V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH37C	-	XC9225H37CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH386	-	XC9225H386D	DC-DC-IC	PWM step-down, 600kHz, 3.8V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH38C	-	XC9225H38CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH396	-	XC9225H396D	DC-DC-IC	PWM step-down, 600kHz, 3.9V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH39C	-	XC9225H39CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3A6	-	XC9225H3A6D	DC-DC-IC	PWM step-down, 600kHz, 3.05V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3AC	-	XC9225H3ACD	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3B6	-	XC9225H3B6D	DC-DC-IC	PWM step-down, 600kHz, 3.15V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3BC	-	XC9225H3BCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3C6	-	XC9225H3C6D	DC-DC-IC	PWM step-down, 600kHz, 3.25V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3CC	-	XC9225H3CCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3D6	-	XC9225H3D6D	DC-DC-IC	PWM step-down, 600kHz, 3.35V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3DC	-	XC9225H3DCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3E6	-	XC9225H3E6D	DC-DC-IC	PWM step-down, 600kHz, 3.45V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3EC	-	XC9225H3ECD	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3F6	-	XC9225H3F6D	DC-DC-IC	PWM step-down, 600kHz, 3.55V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3FC	-	XC9225H3FCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3H6	-	XC9225H3H6D	DC-DC-IC	PWM step-down, 600kHz, 3.65V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3HC	-	XC9225H3HCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3K6	-	XC9225H3K6D	DC-DC-IC	PWM step-down, 600kHz, 3.75V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3KC	-	XC9225H3KCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3L6	-	XC9225H3L6D	DC-DC-IC	PWM step-down, 600kHz, 3.85V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3LC	-	XC9225H3LCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3M6	-	XC9225H3M6D	DC-DC-IC	PWM step-down, 600kHz, 3.95V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH3MC	-	XC9225H3MCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH406	-	XC9225H406D	DC-DC-IC	PWM step-down, 600kHz, 4.0V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZH40C	-	XC9225H40CD	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±1%, 900mA, -CE, PUR	USP-6B	49dc5	DC1	9b	Tor
ZJ	-	RP201K401D	LVR-IC	LDO, 4.0V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
ZK	-	RP201K281D5	LVR-IC	LDO, 2.85V±1%, 150mA, +CE, CL, AE(Mode)	DFN1212-6	52ht	VR10	9a	Ric
ZX	-	XC6221B48B7R	LVR-IC	LDO, 4.85V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
ZY	-	XC6221B49B7R	LVR-IC	LDO, 4.95V±1%, 200mA, +CE, CL	USPN-4	58vm	VR4	9a	Tor
ZZ306	-	XC9225G306D	DC-DC-IC	PWM step-down, 600kHz, 3.0V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ30C	-	XC9225G30CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.0V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ316	-	XC9225G316D	DC-DC-IC	PWM step-down, 600kHz, 3.1V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ31C	-	XC9225G31CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.1V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ326	-	XC9225G326D	DC-DC-IC	PWM step-down, 600kHz, 3.2V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
ZZ32C	-	XC9225G32CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.2V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ336	-	XC9225G336D	DC-DC-IC	PWM step-down, 600kHz, 3.3V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ33C	-	XC9225G33CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.3V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ346	-	XC9225G346D	DC-DC-IC	PWM step-down, 600kHz, 3.4V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ34C	-	XC9225G34CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.4V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ356	-	XC9225G356D	DC-DC-IC	PWM step-down, 600kHz, 3.5V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ35C	-	XC9225G35CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.5V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ366	-	XC9225G366D	DC-DC-IC	PWM step-down, 600kHz, 3.6V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ36C	-	XC9225G36CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.6V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ376	-	XC9225G376D	DC-DC-IC	PWM step-down, 600kHz, 3.7V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ37C	-	XC9225G37CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.7V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ386	-	XC9225G386D	DC-DC-IC	PWM step-down, 600kHz, 3.8V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ38C	-	XC9225G38CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.8V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ396	-	XC9225G396D	DC-DC-IC	PWM step-down, 600kHz, 3.9V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ39C	-	XC9225G39CD	DC-DC-IC	PWM step-down, 1.2MHz, 3.9V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3A6	-	XC9225G3A6D	DC-DC-IC	PWM step-down, 600kHz, 3.05V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3AC	-	XC9225G3ACD	DC-DC-IC	PWM step-down, 1.2MHz, 3.05V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3B6	-	XC9225G3B6D	DC-DC-IC	PWM step-down, 600kHz, 3.15V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3BC	-	XC9225G3BCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.15V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3C6	-	XC9225G3C6D	DC-DC-IC	PWM step-down, 600kHz, 3.25V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3CC	-	XC9225G3CCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.25V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3D6	-	XC9225G3D6D	DC-DC-IC	PWM step-down, 600kHz, 3.35V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3DC	-	XC9225G3DCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.35V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3E6	-	XC9225G3E6D	DC-DC-IC	PWM step-down, 600kHz, 3.45V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3EC	-	XC9225G3ECD	DC-DC-IC	PWM step-down, 1.2MHz, 3.45V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3F6	-	XC9225G3F6D	DC-DC-IC	PWM step-down, 600kHz, 3.55V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3FC	-	XC9225G3FCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.55V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3H6	-	XC9225G3H6D	DC-DC-IC	PWM step-down, 600kHz, 3.65V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3HC	-	XC9225G3HCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.65V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3K6	-	XC9225G3K6D	DC-DC-IC	PWM step-down, 600kHz, 3.75V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3KC	-	XC9225G3KCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.75V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3L6	-	XC9225G3L6D	DC-DC-IC	PWM step-down, 600kHz, 3.85V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3LC	-	XC9225G3LCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.85V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3M6	-	XC9225G3M6D	DC-DC-IC	PWM step-down, 600kHz, 3.95V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ3MC	-	XC9225G3MCD	DC-DC-IC	PWM step-down, 1.2MHz, 3.95V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ406	-	XC9225G406D	DC-DC-IC	PWM step-down, 600kHz, 4.0V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor
ZZ40C	-	XC9225G40CD	DC-DC-IC	PWM step-down, 1.2MHz, 4.0V±1%, 900mA, +CE, PDR	USP-6B	49dc5	DC1	9b	Tor





SECTION 11
D-PAK and I-PAK case SMD semiconductor components

0
1
2
3
4
5
6
7
8
9
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
100	-	XC6503P121JR-G	LVR-IC	LDO, 1.2V±20mV, 500mA	TO-252	68eu	VR1	10a	Tor
100A	-	3PMT100A	TVS	Vvm=100V, Vbr=111V, Vcl=162V, 9.3A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
100CA	-	3PMT100CA	TVS	Vvm=100V, Vbr=111V, Vcl=162V, 9.3A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
101	-	XC6503P131JR-G	LVR-IC	LDO, 1.3V±20mV, 500mA	TO-252	68eu	VR1	10a	Tor
102	-	XC6503P141JR-G	LVR-IC	LDO, 1.4V±20mV, 500mA	TO-252	68eu	VR1	10a	Tor
103	-	XC6503P151JR-G	LVR-IC	LDO, 1.5V±20mV, 500mA	TO-252	68eu	VR1	10a	Tor
104	-	XC6503P161JR-G	LVR-IC	LDO, 1.6V±20mV, 500mA	TO-252	68eu	VR1	10a	Tor
105	-	XC6503P171JR-G	LVR-IC	LDO, 1.7V±20mV, 500mA	TO-252	68eu	VR1	10a	Tor
106	-	XC6503P181JR-G	LVR-IC	LDO, 1.8V±20mV, 500mA	TO-252	68eu	VR1	10a	Tor
107	-	XC6503P191JR-G	LVR-IC	LDO, 1.9V±20mV, 500mA	TO-252	68eu	VR1	10a	Tor
108	-	XC6503P201JR-G	LVR-IC	LDO, 2.0V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
108418	-	LC1084CM3TR18	LVR-IC	LDO, 1.8V±2%, 5A	TO-263-3L	84cn	VR1	10j	Lch
108418	-	LC1084CMTR18	LVR-IC	LDO, 1.8V±2%, 5A	TO-263-2L	68cg	VR1	10h	Lch
108418	-	LC1084COTR18	LVR-IC	LDO, 1.8V±2%, 5A	TO-252	68cg	VR1	10h	Lch
108425	-	LC1084CM3TR25	LVR-IC	LDO, 1.8V±2%, 5A	TO-263-3L	84cn	VR1	10j	Lch
108425	-	LC1084CMTR25	LVR-IC	LDO, 1.8V±2%, 5A	TO-263-2L	68cg	VR1	10h	Lch
108425	-	LC1084COTR25	LVR-IC	LDO, 1.8V±2%, 5A	TO-252	68cg	VR1	10h	Lch
108433	-	LC1084CM3TR33	LVR-IC	LDO, 1.8V±2%, 5A	TO-263-3L	84cn	VR1	10j	Lch
108433	-	LC1084CMTR33	LVR-IC	LDO, 1.8V±2%, 5A	TO-263-2L	68cg	VR1	10h	Lch
108433	-	LC1084COTR33	LVR-IC	LDO, 1.8V±2%, 5A	TO-252	68cg	VR1	10h	Lch
108450	-	LC1084CM3TR50	LVR-IC	LDO, 1.8V±2%, 5A	TO-263-3L	84cn	VR1	10j	Lch
108450	-	LC1084CMTR50	LVR-IC	LDO, 1.8V±2%, 5A	TO-263-2L	68cg	VR1	10h	Lch
108450	-	LC1084COTR50	LVR-IC	LDO, 1.8V±2%, 5A	TO-252	68cg	VR1	10h	Lch
1084AD	-	LC1084CM3TRAD	LVR-IC	LDO, Adjustable 1.8V..5.0V±2%, 5A	TO-263-3L	84cn	VR20	10j	Lch
1084AD	-	LC1084CMTRAD	LVR-IC	LDO, Adjustable 1.8V..5.0V±2%, 5A	TO-263-2L	68cn	VR20	10h	Lch
1084AD	-	LC1084COTRAD	LVR-IC	LDO, Adjustable 1.8V..5.0V±2%, 5A	TO-252	68cn	VR20	10h	Lch
108518	-	LC1085CM3TR18	LVR-IC	LDO, 1.8V±2%, 3A	TO-263-3L	84cn	VR1	10j	Lch
108518	-	LC1085CMTR18	LVR-IC	LDO, 1.8V±2%, 3A	TO-263-2L	68cg	VR1	10h	Lch
108518	-	LC1085COTR18	LVR-IC	LDO, 1.8V±2%, 3A	TO-252	68cg	VR1	10h	Lch
108525	-	LC1085CM3TR25	LVR-IC	LDO, 2.5V±2%, 3A	TO-263-3L	84cn	VR1	10j	Lch
108525	-	LC1085CMTR25	LVR-IC	LDO, 2.5V±2%, 3A	TO-263-2L	68cg	VR1	10h	Lch
108525	-	LC1085COTR25	LVR-IC	LDO, 2.5V±2%, 3A	TO-252	68cg	VR1	10h	Lch
108533	-	LC1085CM3TR33	LVR-IC	LDO, 3.3V±2%, 3A	TO-263-3L	84cn	VR1	10j	Lch
108533	-	LC1085CMTR33	LVR-IC	LDO, 3.3V±2%, 3A	TO-263-2L	68cg	VR1	10h	Lch
108533	-	LC1085COTR33	LVR-IC	LDO, 3.3V±2%, 3A	TO-252	68cg	VR1	10h	Lch
108550	-	LC1085CM3TR50	LVR-IC	LDO, 5.0V±2%, 3A	TO-263-3L	84cn	VR1	10j	Lch
108550	-	LC1085CMTR50	LVR-IC	LDO, 5.0V±2%, 3A	TO-263-2L	68cg	VR1	10h	Lch
108550	-	LC1085COTR50	LVR-IC	LDO, 5.0V±2%, 3A	TO-252	68cg	VR1	10h	Lch
1085AD	-	LC1085CM3TRAD	LVR-IC	LDO, Adjustable 1.8V..5.0V±2%, 3A	TO-263-3L	84cn	VR20	10j	Lch
1085AD	-	LC1085CMTRAD	LVR-IC	LDO, Adjustable 1.8V..5.0V±2%, 3A	TO-263-2L	68cn	VR20	10h	Lch
1085AD	-	LC1085COTRAD	LVR-IC	LDO, Adjustable 1.8V..5.0V±2%, 3A	TO-252	68cn	VR20	10h	Lch
109	-	XC6503P211JR-G	LVR-IC	LDO, 2.1V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10A	-	3PMT10A	TVS	Vvm=10V, Vbr=11.1V, Vcl=17.0V, 88.2A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
10A	-	XC6503P221JR-G	LVR-IC	LDO, 2.2V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10B	-	XC6503P231JR-G	LVR-IC	LDO, 2.3V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10C	-	XC6503P241JR-G	LVR-IC	LDO, 2.4V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10CA	-	3PMT10CA	TVS	Vvm=10V, Vbr=11.1V, Vcl=17.0V, 88.2A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
10D	-	XC6503P251JR-G	LVR-IC	LDO, 2.5V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10E	-	XC6503P261JR-G	LVR-IC	LDO, 2.6V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10F	-	XC6503P271JR-G	LVR-IC	LDO, 2.7V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10H	-	XC6503P281JR-G	LVR-IC	LDO, 2.8V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10K	-	XC6503P291JR-G	LVR-IC	LDO, 2.9V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10L	-	XC6503P301JR-G	LVR-IC	LDO, 3.0V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10M	-	XC6503P311JR-G	LVR-IC	LDO, 3.1V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10N	-	XC6503P321JR-G	LVR-IC	LDO, 3.2V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10N03LA	-	IPD10N03LA	n-MOSFET	LogL, DC/DC-conv, 25V, 30A, 52W, Rds=10.4mΩ(10V), 6.3/18ns	TO-252	68fw	-	10b	Inf
10N03LA	-	IPF10N03LA	n-MOSFET	LogL, DC/DC-conv, 25V, 30A, 52W, Rds=10.4mΩ(10V), 6.3/18ns	TO-252	68fw	-	10b	Inf
10N03LA	-	IPS10N03LA	n-MOSFET	LogL, DC/DC-conv, 25V, 30A, 52W, Rds=10.4mΩ(10V), 6.3/18ns	TO-251	68fw	-	10b	Inf
10N03LA	-	IPU10N03LA	n-MOSFET	LogL, DC/DC-conv, 25V, 30A, 52W, Rds=10.4mΩ(10V), 6.3/18ns	TO-251	68fw	-	10b	Inf
10P	-	XC6503P331JR-G	LVR-IC	LDO, 3.3V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10R	-	XC6503P341JR-G	LVR-IC	LDO, 3.4V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10S	-	XC6503P351JR-G	LVR-IC	LDO, 3.5V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10T	-	XC6503P361JR-G	LVR-IC	LDO, 3.6V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10U	-	XC6503P371JR-G	LVR-IC	LDO, 3.7V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10V	-	XC6503P381JR-G	LVR-IC	LDO, 3.8V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10X	-	XC6503P391JR-G	LVR-IC	LDO, 3.9V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10Y	-	XC6503P401JR-G	LVR-IC	LDO, 4.0V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
10Z	-	XC6503P411JR-G	LVR-IC	LDO, 4.1V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
110	-	XC6503P421JR-G	LVR-IC	LDO, 4.2V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
110A	-	3PMT110A	TVS	Vvm=110V, Vbr=122V, Vcl=177V, 8.4A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
110CA	-	3PMT110CA	TVS	Vvm=110V, Vbr=122V, Vcl=177V, 8.4A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
111	-	XC6503P431JR-G	LVR-IC	LDO, 4.3V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
1117	-	LT1117CM	LVR-IC	LDO, Adjustable 1.5..15V, 800mA	D-PAK	68wc	VR20	10a	Ltc
11172	-	LT1117CM-2.85	LVR-IC	LDO, 2.85V±1%V, 800mA	D-PAK	68wb	VR1	10a	Ltc
11173	-	LT1117CM-3.3	LVR-IC	LDO, 3.3V±1%, 800mA	D-PAK	68wb	VR1	10a	Ltc
11175	-	LT1117CM-5	LVR-IC	LDO, 5.0V±1%, 800mA	D-PAK	68wb	VR1	10a	Ltc
112	-	XC6503P441JR-G	LVR-IC	LDO, 4.4V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
113	-	XC6503P451JR-G	LVR-IC	LDO, 4.5V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
114	-	XC6503P461JR-G	LVR-IC	LDO, 4.6V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
115	-	XC6503P471JR-G	LVR-IC	LDO, 4.7V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
116	-	XC6503P481JR-G	LVR-IC	LDO, 4.8V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
117	-	XC6503P491JR-G	LVR-IC	LDO, 4.9V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
117-2	-	NCP1117DT20T3	LVR-IC	LDO, 2.0V±1%, 800mA	D-PAK	68wb	VR1	10g	Ons
117-2V	-	NCV1117DT20T3	LVR-IC	LDO, 2.0V±1%, 800mA	D-PAK	68wb	VR1	10g	Ons
117-5	-	NCP1117DT50T3	LVR-IC	LDO, 5.0V±1%, 800mA	D-PAK	68wb	VR1	10g	Ons
117-5V	-	NCV1117DT50T3	LVR-IC	LDO, 5.0V±1%, 800mA	D-PAK	68wb	VR1	10g	Ons
117AJ	-	NCP1117DTAT3	LVR-IC	LDO, Adjustable 2..12V, 800mA	D-PAK	68wc	VR20	10g	Ons
117AJV	-	NCV1117DTAT3	LVR-IC	LDO, Adjustable 2..12V, 800mA	D-PAK	68wc	VR20	10g	Ons
118	-	XC6503P501JR-G	LVR-IC	LDO, 5.0V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
1182	-	2SB1182PT	Si-pnp	AF, Sw, 32V, 2A, B=82..390, 100MHz	D-PAK	68tb	-	10a	Chm
11A	-	3PMT11A	TVS	Vvm=11V, Vbr=12.2V, Vcl=18.2V, 82.4A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
11CA	-	3PMT11CA	TVS	Vvm=11V, Vbr=12.2V, Vcl=18.2V, 82.4A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
120	-	XC6503P12AJR-G	LVR-IC	LDO, 1.25V±20mV, 500mA	TO-252	68eu	VR1	10a	Tor
120A	-	3PMT120A	TVS	Vvm=120V, Vbr=133V, Vcl=193V, 7.8A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
120CA	-	3PMT120CA	TVS	Vvm=120V, Vbr=133V, Vcl=193V, 7.8A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
121	-	XC6503P13AJR-G	LVR-IC	LDO, 1.35V±20mV, 500mA	TO-252	68eu	VR1	10a	Tor
122	-	XC6503P14AJR-G	LVR-IC	LDO, 1.45V±20mV, 500mA	TO-252	68eu	VR1	10a	Tor
123	-	XC6503P15AJR-G	LVR-IC	LDO, 1.55V±20mV, 500mA	TO-252	68eu	VR1	10a	Tor
124	-	XC6503P16AJR-G	LVR-IC	LDO, 1.65V±20mV, 500mA	TO-252	68eu	VR1	10a	Tor
125	-	XC6503P17AJR-G	LVR-IC	LDO, 1.75V±20mV, 500mA	TO-252	68eu	VR1	10a	Tor
126	-	XC6503P18AJR-G	LVR-IC	LDO, 1.85V±20mV, 500mA	TO-252	68eu	VR1	10a	Tor
127	-	XC6503P19AJR-G	LVR-IC	LDO, 1.95V±20mV, 500mA	TO-252	68eu	VR1	10a	Tor
128	-	XC6503P20AJR-G	LVR-IC	LDO, 2.05V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
129	-	XC6503P21AJR-G	LVR-IC	LDO, 2.15V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12A	-	3PMT12A	TVS	Vvm=12V, Vbr=13.3V, Vcl=19.9V, 75.3A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
12A	-	XC6503P22AJR-G	LVR-IC	LDO, 2.25V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12B	-	XC6503P23AJR-G	LVR-IC	LDO, 2.35V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12C	-	XC6503P24AJR-G	LVR-IC	LDO, 2.45V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12CA	-	3PMT12CA	TVS	Vvm=12V, Vbr=13.3V, Vcl=19.9V, 75.3A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
12D	-	XC6503P25AJR-G	LVR-IC	LDO, 2.55V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12E	-	XC6503P26AJR-G	LVR-IC	LDO, 2.65V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12F	-	XC6503P27AJR-G	LVR-IC	LDO, 2.75V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12H	-	XC6503P28AJR-G	LVR-IC	LDO, 2.85V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12K	-	XC6503P29AJR-G	LVR-IC	LDO, 2.95V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12L	-	XC6503P30AJR-G	LVR-IC	LDO, 3.05V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12M	-	XC6503P31AJR-G	LVR-IC	LDO, 3.15V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12N	-	XC6503P32AJR-G	LVR-IC	LDO, 3.25V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12P	-	XC6503P33AJR-G	LVR-IC	LDO, 3.35V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12R	-	XC6503P34AJR-G	LVR-IC	LDO, 3.45V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12S	-	XC6503P35AJR-G	LVR-IC	LDO, 3.55V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12T	-	XC6503P36AJR-G	LVR-IC	LDO, 3.65V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12U	-	XC6503P37AJR-G	LVR-IC	LDO, 3.75V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12V	-	XC6503P38AJR-G	LVR-IC	LDO, 3.85V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12X	-	XC6503P39AJR-G	LVR-IC	LDO, 3.95V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12Y	-	XC6503P40AJR-G	LVR-IC	LDO, 4.05V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
12Z	-	XC6503P41AJR-G	LVR-IC	LDO, 4.15V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
130	-	XC6503P42AJR-G	LVR-IC	LDO, 4.25V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
130A	-	3PMT130A	TVS	Vvm=130V, Vbr=144V, Vcl=209V, 7.2A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
130CA	-	3PMT130CA	TVS	Vvm=130V, Vbr=144V, Vcl=209V, 7.2A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
131	-	XC6503P43AJR-G	LVR-IC	LDO, 4.35V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
132	-	XC6503P44AJR-G	LVR-IC	LDO, 4.45V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
133	-	XC6503P45AJR-G	LVR-IC	LDO, 4.55V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
134	-	XC6503P46AJR-G	LVR-IC	LDO, 4.65V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
135	-	XC6503P47AJR-G	LVR-IC	LDO, 4.75V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
136	-	XC6503P48AJR-G	LVR-IC	LDO, 4.85V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
137	-	XC6503P49AJR-G	LVR-IC	LDO, 4.95V±1%, 500mA	TO-252	68eu	VR1	10a	Tor
1386	-	2SB1386PPT	Si-pnp	AF, Sw, 20V, 5A, B=82..390, 120MHz	D-PAK	68tb	-	10a	Chm
13A	-	3PMT13A	TVS	Vvm=13V, Vbr=14.4V, Vcl=21.5V, 69.7A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
13CA	-	3PMT13CA	TVS	Vvm=13V, Vbr=14.4V, Vcl=21.5V, 69.7A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
14A	-	3PMT14A	TVS	Vvm=14V, Vbr=15.8V, Vcl=23.2V, 64.7A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
14CA	-	3PMT14CA	TVS	Vvm=14V, Vbr=15.8V, Vcl=23.2V, 64.7A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
150A	-	3PMT150A	TVS	Vvm=150V, Vbr=167V, Vcl=243V, 6.2A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
150CA	-	3PMT150CA	TVS	Vvm=150V, Vbr=167V, Vcl=243V, 6.2A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
15A	-	3PMT15A	TVS	Vvm=15V, Vbr=16.7V, Vcl=24.4V, 61.5A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
15CA	-	3PMT15CA	TVS	Vvm=15V, Vbr=16.7V, Vcl=24.4V, 61.5A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
160A	-	3PMT160A	TVS	Vvm=160V, Vbr=178V, Vcl=259V, 5.8A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
160CA	-	3PMT160CA	TVS	Vvm=160V, Vbr=178V, Vcl=259V, 5.8A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
16A	-	3PMT16A	TVS	Vvm=16V, Vbr=17.8V, Vcl=26.0V, 57.7A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
16CA	-	3PMT16CA	TVS	Vvm=16V, Vbr=17.8V, Vcl=26.0V, 57.7A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
170A	-	3PMT170A	TVS	Vvm=170V, Vbr=189V, Vcl=275V, 5.5A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
170CA	-	3PMT170CA	TVS	Vvm=170V, Vbr=189V, Vcl=275V, 5.5A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
17-12	-	NCP1117DT12T3	LVR-IC	LDO, 12V±1%, 800mA	D-PAK	68wb	VR1	10g	Ons
17-12V	-	NCV1117DT12T3	LVR-IC	LDO, 12V±1%, 800mA	D-PAK	68wb	VR1	10g	Ons
17-15	-	NCP1117DT15T3	LVR-IC	LDO, 1.5V±1%, 800mA	D-PAK	68wb	VR1	10g	Ons
17-15V	-	NCV1117DT15T3	LVR-IC	LDO, 1.5V±1%, 800mA	D-PAK	68wb	VR1	10g	Ons
17-18	-	NCP1117DT18T3	LVR-IC	LDO, 1.8V±1%, 800mA	D-PAK	68wb	VR1	10g	Ons
17-18V	-	NCV1117DT18T3	LVR-IC	LDO, 1.8V±1%, 800mA	D-PAK	68wb	VR1	10g	Ons
17-25	-	NCP1117DT25T3	LVR-IC	LDO, 2.5V±1%, 800mA	D-PAK	68wb	VR1	10g	Ons
17-25V	-	NCV1117DT25T3	LVR-IC	LDO, 2.5V±1%, 800mA	D-PAK	68wb	VR1	10g	Ons
17-33	-	NCP1117DT33T3	LVR-IC	LDO, 3.3V±1%, 800mA	D-PAK	68wb	VR1	10g	Ons
17-33V	-	NCV1117DT33T3	LVR-IC	LDO, 3.3V±1%, 800mA	D-PAK	68wb	VR1	10g	Ons
17A	-	3PMT17A	TVS	Vvm=17V, Vbr=18.9V, Vcl=27.6V, 53.3A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
17CA	-	3PMT17CA	TVS	Vvm=17V, Vbr=18.9V, Vcl=27.6V, 53.3A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
18A	-	3PMT18A	TVS	Vvm=18V, Vbr=20.0V, Vcl=29.2V, 51.4A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
18CA	-	3PMT18CA	TVS	Vvm=18V, Vbr=20.0V, Vcl=29.2V, 51.4A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
2098	-	2SD2098PPT	Si-npn	AF, Sw, 20V, 5A, B=230..600, 150MHz	D-PAK	68tb	-	10a	Chm
20A	-	3PMT20A	TVS	Vvm=20V, Vbr=22.2V, Vcl=32.4V, 46.3A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
20CA	-	3PMT20CA	TVS	Vvm=20V, Vbr=22.2V, Vcl=32.4V, 46.3A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
2161-09	-	FSP2161D09AD	LVR-IC	LDO, 0.9V±2%, 1.5A	TO-252	68eu	VR1	10k	Fsl
2161-09	-	FSP2161K09AD	LVR-IC	LDO, 0.9V±2%, 1.5A, +CE	TO-263-5	111s7	VR4	10m	Fsl
2161-10	-	FSP2161D10AD	LVR-IC	LDO, 1.0V±2%, 1.5A	TO-252	68eu	VR1	10k	Fsl
2161-10	-	FSP2161K10AD	LVR-IC	LDO, 1.0V±2%, 1.5A, +CE	TO-263-5	111s7	VR4	10m	Fsl
2161-12	-	FSP2161D12AD	LVR-IC	LDO, 1.2V±2%, 1.5A	TO-252	68eu	VR1	10k	Fsl
2161-12	-	FSP2161K12AD	LVR-IC	LDO, 1.2V±2%, 1.5A, +CE	TO-263-5	111s7	VR4	10m	Fsl
2161-15	-	FSP2161D15AD	LVR-IC	LDO, 1.5V±2%, 1.5A	TO-252	68eu	VR1	10k	Fsl
2161-15	-	FSP2161K15AD	LVR-IC	LDO, 1.5V±2%, 1.5A, +CE	TO-263-5	111s7	VR4	10m	Fsl
2161-18	-	FSP2161D18AD	LVR-IC	LDO, 1.8V±2%, 1.5A	TO-252	68eu	VR1	10k	Fsl
2161-18	-	FSP2161K18AD	LVR-IC	LDO, 1.8V±2%, 1.5A, +CE	TO-263-5	111s7	VR4	10m	Fsl
2161-25	-	FSP2161D25AD	LVR-IC	LDO, 2.5V±2%, 1.5A	TO-252	68eu	VR1	10k	Fsl
2161-25	-	FSP2161K25AD	LVR-IC	LDO, 2.5V±2%, 1.5A, +CE	TO-263-5	111s7	VR4	10m	Fsl
2161-28	-	FSP2161D28AD	LVR-IC	LDO, 2.8V±2%, 1.5A	TO-252	68eu	VR1	10k	Fsl
2161-28	-	FSP2161K28AD	LVR-IC	LDO, 2.8V±2%, 1.5A, +CE	TO-263-5	111s7	VR4	10m	Fsl
2161-285	-	FSP2161D285AD	LVR-IC	LDO, 2.85V±2%, 1.5A	TO-252	68eu	VR1	10k	Fsl
2161-285	-	FSP2161K285AD	LVR-IC	LDO, 2.85V±2%, 1.5A, +CE	TO-263-5	111s7	VR4	10m	Fsl
2161-30	-	FSP2161D30AD	LVR-IC	LDO, 3.0V±2%, 1.5A	TO-252	68eu	VR1	10k	Fsl
2161-30	-	FSP2161K30AD	LVR-IC	LDO, 3.0V±2%, 1.5A, +CE	TO-263-5	111s7	VR4	10m	Fsl
2161-33	-	FSP2161D33AD	LVR-IC	LDO, 3.3V±2%, 1.5A	TO-252	68eu	VR1	10k	Fsl
2161-33	-	FSP2161K33AD	LVR-IC	LDO, 3.3V±2%, 1.5A, +CE	TO-263-5	111s7	VR4	10m	Fsl
22A	-	3PMT22A	TVS	Vvm=22V, Vbr=24.4V, Vcl=35.5V, 42.2A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
22CA	-	3PMT22CA	TVS	Vvm=22V, Vbr=24.4V, Vcl=35.5V, 42.2A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
24A	-	3PMT24A	TVS	Vvm=24V, Vbr=26.7V, Vcl=38.9V, 38.6A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
24CA	-	3PMT24CA	TVS	Vvm=24V, Vbr=26.7V, Vcl=38.9V, 38.6A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
24M	-	XC6216D202JR	LVR-IC	2.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
24N	-	XC6216D212JR	LVR-IC	2.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
24P	-	XC6216D222JR	LVR-IC	2.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
24R	-	XC6216D232JR	LVR-IC	2.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
24S	-	XC6216D242JR	LVR-IC	2.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
24T	-	XC6216D252JR	LVR-IC	2.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
24U	-	XC6216D262JR	LVR-IC	2.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
24V	-	XC6216D272JR	LVR-IC	2.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
24X	-	XC6216D282JR	LVR-IC	2.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
24Y	-	XC6216D292JR	LVR-IC	2.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
24Z	-	XC6216D302JR	LVR-IC	3.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
250	-	XC6216D312JR	LVR-IC	3.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
251	-	XC6216D322JR	LVR-IC	3.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
252	-	XC6216D332JR	LVR-IC	3.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
253	-	XC6216D342JR	LVR-IC	3.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
254	-	XC6216D352JR	LVR-IC	3.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
255	-	XC6216D362JR	LVR-IC	3.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
256	-	XC6216D372JR	LVR-IC	3.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
257	-	XC6216D382JR	LVR-IC	3.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
258	-	XC6216D392JR	LVR-IC	3.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
259	-	XC6216D402JR	LVR-IC	4.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25A	-	XC6216D412JR	LVR-IC	4.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25B	-	XC6216D422JR	LVR-IC	4.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25C	-	XC6216D432JR	LVR-IC	4.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25D	-	XC6216D442JR	LVR-IC	4.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25E	-	XC6216D452JR	LVR-IC	4.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25F	-	XC6216D462JR	LVR-IC	4.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25H	-	XC6216D472JR	LVR-IC	4.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25K	-	XC6216D482JR	LVR-IC	4.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25L	-	XC6216D492JR	LVR-IC	4.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25M	-	XC6216D502JR	LVR-IC	5.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25N	-	XC6216D512JR	LVR-IC	5.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25P	-	XC6216D522JR	LVR-IC	5.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25R	-	XC6216D532JR	LVR-IC	5.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25S	-	XC6216D542JR	LVR-IC	5.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25T	-	XC6216D552JR	LVR-IC	5.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25U	-	XC6216D562JR	LVR-IC	5.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25V	-	XC6216D572JR	LVR-IC	5.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25X	-	XC6216D582JR	LVR-IC	5.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25Y	-	XC6216D592JR	LVR-IC	5.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
25Z	-	XC6216D602JR	LVR-IC	6.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
260	-	XC6216D612JR	LVR-IC	6.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
261	-	XC6216D622JR	LVR-IC	6.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
262	-	XC6216D632JR	LVR-IC	6.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
263	-	XC6216D642JR	LVR-IC	6.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
264	-	XC6216D652JR	LVR-IC	6.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
265	-	XC6216D662JR	LVR-IC	6.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
266	-	XC6216D672JR	LVR-IC	6.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
267	-	XC6216D682JR	LVR-IC	6.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
268	-	XC6216D692JR	LVR-IC	6.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
269	-	XC6216D702JR	LVR-IC	7.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26A	-	3PMT26A	TVS	Vvm=26V, Vbr=28.9V, Vcl=42.1V, 35.6A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
26A	-	XC6216D712JR	LVR-IC	7.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26B	-	XC6216D722JR	LVR-IC	7.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26C	-	XC6216D732JR	LVR-IC	7.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26CA	-	3PMT26CA	TVS	Vvm=26V, Vbr=28.9V, Vcl=42.1V, 35.6A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
26D	-	XC6216D742JR	LVR-IC	7.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26E	-	XC6216D752JR	LVR-IC	7.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26F	-	XC6216D762JR	LVR-IC	7.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26H	-	XC6216D772JR	LVR-IC	7.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26K	-	XC6216D782JR	LVR-IC	7.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26L	-	XC6216D792JR	LVR-IC	7.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26M	-	XC6216D802JR	LVR-IC	8.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26N	-	XC6216D812JR	LVR-IC	8.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26P	-	XC6216D822JR	LVR-IC	8.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26R	-	XC6216D832JR	LVR-IC	8.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26S	-	XC6216D842JR	LVR-IC	8.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26T	-	XC6216D852JR	LVR-IC	8.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26U	-	XC6216D862JR	LVR-IC	8.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26V	-	XC6216D872JR	LVR-IC	8.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26X	-	XC6216D882JR	LVR-IC	8.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26Y	-	XC6216D892JR	LVR-IC	8.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
26Z	-	XC6216D902JR	LVR-IC	9.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
270	-	XC6216D912JR	LVR-IC	9.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
271	-	XC6216D922JR	LVR-IC	9.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
272	-	XC6216D932JR	LVR-IC	9.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
273	-	XC6216D942JR	LVR-IC	9.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
274	-	XC6216D952JR	LVR-IC	9.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
275	-	XC6216D962JR	LVR-IC	9.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
276	-	XC6216D972JR	LVR-IC	9.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
277	-	XC6216D982JR	LVR-IC	9.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
278	-	XC6216D992JR	LVR-IC	9.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
279	-	XC6216DA02JR	LVR-IC	10.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27A	-	XC6216DA12JR	LVR-IC	10.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27B	-	XC6216DA22JR	LVR-IC	10.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27C	-	XC6216DA32JR	LVR-IC	10.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27D	-	XC6216DA42JR	LVR-IC	10.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27E	-	XC6216DA52JR	LVR-IC	10.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
27F	-	XC6216DA62JR	LVR-IC	10.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27H	-	XC6216DA72JR	LVR-IC	10.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27K	-	XC6216DA82JR	LVR-IC	10.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27L	-	XC6216DA92JR	LVR-IC	10.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27M	-	XC6216DB02JR	LVR-IC	11.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27N	-	XC6216DB12JR	LVR-IC	11.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27P	-	XC6216DB22JR	LVR-IC	11.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27R	-	XC6216DB32JR	LVR-IC	11.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27S	-	XC6216DB42JR	LVR-IC	11.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27T	-	XC6216DB52JR	LVR-IC	11.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27U	-	XC6216DB62JR	LVR-IC	11.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27V	-	XC6216DB72JR	LVR-IC	11.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27X	-	XC6216DB82JR	LVR-IC	11.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27Y	-	XC6216DB92JR	LVR-IC	11.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
27Z	-	XC6216DC02JR	LVR-IC	12.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
28A	-	3PMT28A	TVS	Vvm=28V, Vbr=31.1V, Vcl=45.4V, 33.0A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
28CA	-	3PMT28CA	TVS	Vvm=28V, Vbr=31.1V, Vcl=45.4V, 33.0A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
2903	-	µPC2903HB	LVR-IC	LDO, 3.0V±0.5%, 1A	SC-64	84eu	VR1	10ga	Nec
2903	-	µPC2903T	LVR-IC	LDO, 3.0V±0.5%, 1A	SC-63	68hn	VR1	10g	Nec
2905	-	µPC2905HB	LVR-IC	LDO, 5.0V±0.5%, 1A	SC-64	84eu	VR1	10ga	Nec
2905	-	µPC2905T	LVR-IC	LDO, 5.0V±0.5%, 1A	SC-63	68hn	VR1	10g	Nec
2906	-	µPC2906HB	LVR-IC	LDO, 6.0V±0.5%, 1A	SC-64	84eu	VR1	10ga	Nec
2906	-	µPC2906T	LVR-IC	LDO, 6.0V±0.5%, 1A	SC-63	68hn	VR1	10g	Nec
2907	-	µPC2907HB	LVR-IC	LDO, 7.0V±0.5%, 1A	SC-64	84eu	VR1	10ga	Nec
2907	-	µPC2907T	LVR-IC	LDO, 7.0V±0.5%, 1A	SC-63	68hn	VR1	10g	Nec
2908	-	µPC2908HB	LVR-IC	LDO, 8.0V±0.5%, 1A	SC-64	84eu	VR1	10ga	Nec
2908	-	µPC2908T	LVR-IC	LDO, 8.0V±0.5%, 1A	SC-63	68hn	VR1	10g	Nec
2909	-	µPC2909HB	LVR-IC	LDO, 9.0V±0.5%, 1A	SC-64	84eu	VR1	10ga	Nec
2909	-	µPC2909T	LVR-IC	LDO, 9.0V±0.5%, 1A	SC-63	68hn	VR1	10g	Nec
2910	-	µPC2910HB	LVR-IC	LDO, 10.0V±0.5%, 1A	SC-64	84eu	VR1	10ga	Nec
2910	-	µPC2910T	LVR-IC	LDO, 10.0V±0.5%, 1A	SC-63	68hn	VR1	10g	Nec
2912	-	µPC2912HB	LVR-IC	LDO, 12.0V±0.5%, 1A	SC-64	84eu	VR1	10ga	Nec
2912	-	µPC2912T	LVR-IC	LDO, 12.0V±0.5%, 1A	SC-63	68hn	VR1	10g	Nec
2933	-	µPC2933HB	LVR-IC	LDO, 3.3V±0.5%, 1A	SC-64	84eu	VR1	10ga	Nec
2933	-	µPC2933T	LVR-IC	LDO, 3.3V±0.5%, 1A	SC-63	68hn	VR1	10g	Nec
29M03	-	µPC29M03HB	LVR-IC	LDO, 3.0V±0.5%, 500mA	SC-64	84eu	VR1	10ga	Nec
29M03	-	µPC29M03T	LVR-IC	LDO, 3.0V±0.5%, 500mA	SC-63	68hn	VR1	10g	Nec
29M05	-	µPC29M05HB	LVR-IC	LDO, 5.0V±0.5%, 500mA	SC-64	84eu	VR1	10ga	Nec
29M05	-	µPC29M05T	LVR-IC	LDO, 5.0V±0.5%, 500mA	SC-63	68hn	VR1	10g	Nec
29M06	-	µPC29M06HB	LVR-IC	LDO, 6.0V±0.5%, 500mA	SC-64	84eu	VR1	10ga	Nec
29M06	-	µPC29M06T	LVR-IC	LDO, 6.0V±0.5%, 500mA	SC-63	68hn	VR1	10g	Nec
29M07	-	µPC29M07HB	LVR-IC	LDO, 7.0V±0.5%, 500mA	SC-64	84eu	VR1	10ga	Nec
29M07	-	µPC29M07T	LVR-IC	LDO, 7.0V±0.5%, 500mA	SC-63	68hn	VR1	10g	Nec
29M08	-	µPC29M08HB	LVR-IC	LDO, 8.0V±0.5%, 500mA	SC-64	84eu	VR1	10ga	Nec
29M08	-	µPC29M08T	LVR-IC	LDO, 8.0V±0.5%, 500mA	SC-63	68hn	VR1	10g	Nec
29M09	-	µPC29M09HB	LVR-IC	LDO, 9.0V±0.5%, 500mA	SC-64	84eu	VR1	10ga	Nec
29M09	-	µPC29M09T	LVR-IC	LDO, 9.0V±0.5%, 500mA	SC-63	68hn	VR1	10g	Nec
29M10	-	µPC29M10HB	LVR-IC	LDO, 10.0V±0.5%, 500mA	SC-64	84eu	VR1	10ga	Nec
29M10	-	µPC29M10T	LVR-IC	LDO, 10.0V±0.5%, 500mA	SC-63	68hn	VR1	10g	Nec
29M12	-	µPC29M12HB	LVR-IC	LDO, 12.0V±0.5%, 500mA	SC-64	84eu	VR1	10ga	Nec
29M12	-	µPC29M12T	LVR-IC	LDO, 12.0V±0.5%, 500mA	SC-63	68hn	VR1	10g	Nec
29M33	-	µPC29M33HB	LVR-IC	LDO, 3.3V±0.5%, 500mA	SC-64	84eu	VR1	10ga	Nec
29M33	-	µPC29M33T	LVR-IC	LDO, 3.3V±0.5%, 500mA	SC-63	68hn	VR1	10g	Nec
30A	-	3PMT30A	TVS	Vvm=30V, Vbr=33.3V, Vcl=48.4V, 31.0A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
30CA	-	3PMT30CA	TVS	Vvm=30V, Vbr=33.3V, Vcl=48.4V, 31.0A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
33A	-	3PMT33A	TVS	Vvm=33V, Vbr=36.7V, Vcl=53.3V, 28.1A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
33CA	-	3PMT33CA	TVS	Vvm=33V, Vbr=36.7V, Vcl=53.3V, 28.1A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
36A	-	3PMT36A	TVS	Vvm=36V, Vbr=40.0V, Vcl=58.1V, 25.8A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
36CA	-	3PMT36CA	TVS	Vvm=36V, Vbr=40.0V, Vcl=58.1V, 25.8A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
40A	-	3PMT40A	TVS	Vvm=40V, Vbr=44.4V, Vcl=64.5V, 23.2A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
40CA	-	3PMT40CA	TVS	Vvm=40V, Vbr=44.4V, Vcl=64.5V, 23.2A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
43A	-	3PMT43A	TVS	Vvm=43V, Vbr=47.8V, Vcl=69.4V, 21.6A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
43CA	-	3PMT43CA	TVS	Vvm=43V, Vbr=47.8V, Vcl=69.4V, 21.6A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
45A	-	3PMT45A	TVS	Vvm=45V, Vbr=50.0V, Vcl=72.7V, 20.6A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
45CA	-	3PMT45CA	TVS	Vvm=45V, Vbr=50.0V, Vcl=72.7V, 20.6A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
48A	-	3PMT48A	TVS	Vvm=48V, Vbr=53.3V, Vcl=7.4V, 19.4A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
48CA	-	3PMT48CA	TVS	Vvm=48V, Vbr=53.3V, Vcl=7.4V, 19.4A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
4N03L02	-	IPD90N03S4L-02	n-MOSFET	Sw, 30V, 90A, 136W, Rds=1.8mΩ(90A), 14/62ns	TO-252	68fw	-	10b	Inf
4N03L03	-	IPD90N03S4L-03	n-MOSFET	Sw, 30V, 90A, 94W, Rds=2.5mΩ(90A), 9/37ns	TO-252	68fw	-	10b	Inf
4N03L04	-	IPD70N03S4L-04	n-MOSFET	Sw, 30V, 70A, 68W, Rds=3.6mΩ(70A), 7/27ns	TO-252	68fw	-	10b	Inf



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
4N03L06	-	IPD50N03S4L-06	n-MOSFET	Sw, 30V, 50A, 56W, Rds=4.9mΩ(50A), 3/19ns	TO-252	68fw	-	10b	Inf
4N03L08	-	IPD40N03S4L-08	n-MOSFET	Sw, 30V, 40A, 42W, Rds=7.2mΩ(40A), 3/12ns	TO-252	68fw	-	10b	Inf
4N03L15	-	IPB22N03S4L-15	n-MOSFET	Sw, 30V, 22A, 31W, Rds=12.7mΩ(22A), 3/12ns	TO-263	68fw	-	10b	Inf
4N03L15	-	IPI22N03S4L-15	n-MOSFET	Sw, 30V, 22A, 31W, Rds=12.7mΩ(22A), 3/12ns	TO-262	84fi	-	10ga	Inf
5.0A	-	3PMT5.0A	TVS	Vvm=5V, Vbr=6.40V, Vcl=9.2V, 163.0A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
5.0CA	-	3PMT5.0CA	TVS	Vvm=5V, Vbr=6.40V, Vcl=9.2V, 163.0A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
510	-	S5KP10	TVS	Vbr=11.1..13.6V, Vrwm=10V, 266A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5100	-	S5KP100	TVS	Vbr=111..136V, Vrwm=100V, 28A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5100A	-	S5KP100A	TVS	Vbr=111..123V, Vrwm=100V, 31A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5100C	-	S5KP100C	TVS	Vbr=111..136V, Vrwm=100V, 28A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
5100CA	-	S5KP100CA	TVS	Vbr=111..123V, Vrwm=100V, 31A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
510A	-	S5KP10A	TVS	Vbr=11.1..12.3V, Vrwm=10V, 294A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
510C	-	S5KP10C	TVS	Vbr=11.1..13.6V, Vrwm=10V, 266A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
510CA	-	S5KP10CA	TVS	Vbr=11.1..12.3V, Vrwm=10V, 294A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
511	-	S5KP11	TVS	Vbr=12.2..14.9V, Vrwm=11V, 249A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5110	-	S5KP110	TVS	Vbr=122..149V, Vrwm=110V, 26A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5110A	-	S5KP110A	TVS	Vbr=122..135V, Vrwm=110V, 28A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5110C	-	S5KP110C	TVS	Vbr=122..149V, Vrwm=110V, 26A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
5110CA	-	S5KP110CA	TVS	Vbr=122..135V, Vrwm=110V, 28A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
5113	-	CHT5113PPT	Si-npn	AF, Sw, 60V, 6A, B=120..300, 150MHz	D-PAK	68tb	-	10a	Chm
511A	-	S5KP11A	TVS	Vbr=12.2..13.5V, Vrwm=11V, 274A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
511C	-	S5KP11C	TVS	Vbr=12.2..14.9V, Vrwm=11V, 249A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
511CA	-	S5KP11CA	TVS	Vbr=12.2..13.5V, Vrwm=11V, 274A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
512	-	S5KP12	TVS	Vbr=13.3..16.3V, Vrwm=12V, 227A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5120	-	S5KP120	TVS	Vbr=133..163V, Vrwm=120V, 24A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5120A	-	S5KP120A	TVS	Vbr=133..147V, Vrwm=120V, 26A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5120C	-	S5KP120C	TVS	Vbr=133..163V, Vrwm=120V, 24A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
5120CA	-	S5KP120CA	TVS	Vbr=133..147V, Vrwm=120V, 26A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
512A	-	S5KP12A	TVS	Vbr=13.3..14.7V, Vrwm=12V, 251A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
512C	-	S5KP12C	TVS	Vbr=13.3..16.3V, Vrwm=12V, 227A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
512CA	-	S5KP12CA	TVS	Vbr=13.3..14.7V, Vrwm=12V, 251A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
513	-	S5KP13	TVS	Vbr=14.4..17.6V, Vrwm=13V, 210A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
513A	-	S5KP13A	TVS	Vbr=14.4..15.9V, Vrwm=13V, 232A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
513C	-	S5KP13C	TVS	Vbr=14.4..17.6V, Vrwm=13V, 210A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
513CA	-	S5KP13CA	TVS	Vbr=14.4..15.9V, Vrwm=13V, 232A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
514	-	S5KP14	TVS	Vbr=15.6..19.1V, Vrwm=14V, 194A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
514A	-	S5KP14A	TVS	Vbr=15.6..17.2V, Vrwm=14V, 215A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
514C	-	S5KP14C	TVS	Vbr=15.6..19.1V, Vrwm=14V, 194A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
514CA	-	S5KP14CA	TVS	Vbr=15.6..17.2V, Vrwm=14V, 215A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
515	-	S5KP15	TVS	Vbr=16.7..20.4V, Vrwm=15V, 188A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5150	-	S5KP150	TVS	Vbr=167..204V, Vrwm=150V, 19A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5150A	-	S5KP150A	TVS	Vbr=167..184V, Vrwm=150V, 21A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5150C	-	S5KP150C	TVS	Vbr=167..204V, Vrwm=150V, 19A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
5150CA	-	S5KP150CA	TVS	Vbr=167..184V, Vrwm=150V, 21A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
515A	-	S5KP15A	TVS	Vbr=16.7..18.5V, Vrwm=15V, 206A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
515C	-	S5KP15C	TVS	Vbr=16.7..20.4V, Vrwm=15V, 188A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
515CA	-	S5KP15CA	TVS	Vbr=16.7..18.5V, Vrwm=15V, 206A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
516	-	S5KP16	TVS	Vbr=17.8..21.8V, Vrwm=16V, 176A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5160	-	S5KP160	TVS	Vbr=178..217V, Vrwm=160V, 18A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5160A	-	S5KP160A	TVS	Vbr=178..196V, Vrwm=160V, 19A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5160C	-	S5KP160C	TVS	Vbr=178..217V, Vrwm=160V, 18A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
5160CA	-	S5KP160CA	TVS	Vbr=178..196V, Vrwm=160V, 19A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
516A	-	S5KP16A	TVS	Vbr=17.8..19.7V, Vrwm=16V, 192A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
516C	-	S5KP16C	TVS	Vbr=17.8..21.8V, Vrwm=16V, 176A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
516CA	-	S5KP16CA	TVS	Vbr=17.8..19.7V, Vrwm=16V, 192A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
517	-	S5KP17	TVS	Vbr=18.9..23.1V, Vrwm=17V, 164A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5170	-	S5KP170	TVS	Vbr=189..231V, Vrwm=170V, 17A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5170A	-	S5KP170A	TVS	Vbr=189..209V, Vrwm=170V, 18A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5170C	-	S5KP170C	TVS	Vbr=189..231V, Vrwm=170V, 17A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
5170CA	-	S5KP170CA	TVS	Vbr=189..209V, Vrwm=170V, 18A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
517A	-	S5KP17A	TVS	Vbr=18.9..20.9V, Vrwm=17V, 181A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
517C	-	S5KP17C	TVS	Vbr=18.9..23.1V, Vrwm=17V, 164A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
517CA	-	S5KP17CA	TVS	Vbr=18.9..20.9V, Vrwm=17V, 181A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
518	-	S5KP18	TVS	Vbr=20.0..24.4V, Vrwm=18V, 155A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5180	-	S5KP180	TVS	Vbr=200..244V, Vrwm=180V, 16A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5180A	-	S5KP180A	TVS	Vbr=200..221V, Vrwm=180V, 17A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
5180C	-	S5KP180C	TVS	Vbr=200..244V, Vrwm=180V, 16A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
5180CA	-	S5KP180CA	TVS	Vbr=200..221V, Vrwm=180V, 17A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
518A	-	S5KP18A	TVS	Vbr=20.0..22.1V, Vrwm=18V, 172A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
518C	-	S5KP18C	TVS	Vbr=20.0..24.4V, Vrwm=18V, 155A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
518CA	-	S5KP18CA	TVS	Vbr=20.0..22.1V, Vrwm=18V, 172A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
51A	-	3PMT51A	TVS	Vvm=51V, Vbr=56.7V, Vcl=82.4V, 18.2A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
51CA	-	3PMT51CA	TVS	Vvm=51V, Vbr=56.7V, Vcl=82.4V, 18.2A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
520	-	S5KP20	TVS	Vbr=22.2..27.1V, Vrwm=20V, 139A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
520A	-	S5KP20A	TVS	Vbr=22.2..24.5V, Vrwm=20V, 154A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
520C	-	S5KP20C	TVS	Vbr=22.2..27.1V, Vrwm=20V, 139A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
520CA	-	S5KP20CA	TVS	Vbr=22.2..24.5V, Vrwm=20V, 154A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
522	-	S5KP22	TVS	Vbr=24.4..29.8V, Vrwm=22V, 127A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
522A	-	S5KP22A	TVS	Vbr=24.4..26.9V, Vrwm=22V, 141A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
522C	-	S5KP22C	TVS	Vbr=24.4..29.8V, Vrwm=22V, 127A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
522CA	-	S5KP22CA	TVS	Vbr=24.4..26.9V, Vrwm=22V, 141A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
524	-	S5KP24	TVS	Vbr=26.7..32.6V, Vrwm=24V, 116A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
524A	-	S5KP24A	TVS	Vbr=26.7..29.5V, Vrwm=24V, 128A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
524C	-	S5KP24C	TVS	Vbr=26.7..32.6V, Vrwm=24V, 116A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
524CA	-	S5KP24CA	TVS	Vbr=26.7..29.5V, Vrwm=24V, 128A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
526	-	S5KP26	TVS	Vbr=28.9..35.3V, Vrwm=26V, 107A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
526A	-	S5KP26A	TVS	Vbr=28.9..31.9V, Vrwm=26V, 119A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
526C	-	S5KP26C	TVS	Vbr=28.9..35.3V, Vrwm=26V, 107A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
526CA	-	S5KP26CA	TVS	Vbr=28.9..31.9V, Vrwm=26V, 119A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
528	-	S5KP28	TVS	Vbr=31.1..38.0V, Vrwm=28V, 99A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
528A	-	S5KP28A	TVS	Vbr=31.1..34.4V, Vrwm=28V, 110A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
528C	-	S5KP28C	TVS	Vbr=31.1..38.0V, Vrwm=28V, 99A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
528CA	-	S5KP28CA	TVS	Vbr=31.1..34.4V, Vrwm=28V, 110A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
530	-	S5KP30	TVS	Vbr=33.3..40.7V, Vrwm=30V, 93A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
530A	-	S5KP30A	TVS	Vbr=33.3..36.8V, Vrwm=30V, 103A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
530C	-	S5KP30C	TVS	Vbr=33.3..40.7V, Vrwm=30V, 93A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
530CA	-	S5KP30CA	TVS	Vbr=33.3..36.8V, Vrwm=30V, 103A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
533	-	S5KP33	TVS	Vbr=36.7..44.9V, Vrwm=33V, 85A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
533A	-	S5KP33A	TVS	Vbr=36.7..40.6V, Vrwm=33V, 94A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
533C	-	S5KP33C	TVS	Vbr=36.7..44.9V, Vrwm=33V, 85A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
533CA	-	S5KP33CA	TVS	Vbr=36.7..40.6V, Vrwm=33V, 94A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
536	-	S5KP36	TVS	Vbr=40.0..48.9V, Vrwm=36V, 78A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
536A	-	S5KP36A	TVS	Vbr=40.0..44.2V, Vrwm=36V, 86A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
536C	-	S5KP36C	TVS	Vbr=40.0..48.9V, Vrwm=36V, 78A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
536CA	-	S5KP36CA	TVS	Vbr=40.0..44.2V, Vrwm=36V, 86A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
540	-	S5KP40	TVS	Vbr=44.4..54.3V, Vrwm=40V, 70A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
540A	-	S5KP40A	TVS	Vbr=44.4..49.1V, Vrwm=40V, 78A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
540C	-	S5KP40C	TVS	Vbr=44.4..54.3V, Vrwm=40V, 70A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
540CA	-	S5KP40CA	TVS	Vbr=44.4..49.1V, Vrwm=40V, 78A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
543	-	S5KP43	TVS	Vbr=47.8..58.4V, Vrwm=43V, 65A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
543A	-	S5KP43A	TVS	Vbr=47.8..52.8V, Vrwm=43V, 72A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
543C	-	S5KP43C	TVS	Vbr=47.8..58.4V, Vrwm=43V, 65A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
543CA	-	S5KP43CA	TVS	Vbr=47.8..52.8V, Vrwm=43V, 72A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
545	-	S5KP45	TVS	Vbr=50.0..61.1V, Vrwm=45V, 62A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
545A	-	S5KP45A	TVS	Vbr=50.0..55.3V, Vrwm=45V, 69A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
545C	-	S5KP45C	TVS	Vbr=50.0..61.1V, Vrwm=45V, 62A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
545CA	-	S5KP45CA	TVS	Vbr=50.0..55.3V, Vrwm=45V, 69A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
548	-	S5KP48	TVS	Vbr=53.3..65.2V, Vrwm=48V, 58A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
548A	-	S5KP48A	TVS	Vbr=53.3..58.9V, Vrwm=48V, 65A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
548C	-	S5KP48C	TVS	Vbr=53.3..65.2V, Vrwm=48V, 58A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
548CA	-	S5KP48CA	TVS	Vbr=53.3..58.9V, Vrwm=48V, 65A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
54A	-	3PMT54A	TVS	Vvm=54V, Vbr=60.0V, Vcl=87.1V, 17.2A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
54CA	-	3PMT54CA	TVS	Vvm=54V, Vbr=60.0V, Vcl=87.1V, 17.2A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
55.0	-	S5KP5.0	TVS	Vbr=6.40..7.30V, Vrwm=5.0V, 520A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
55.0A	-	S5KP5.0A	TVS	Vbr=6.40..7.00V, Vrwm=5.0V, 543A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
55.0C	-	S5KP5.0C	TVS	Vbr=6.40..7.30V, Vrwm=5.0V, 520A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
55.0CA	-	S5KP5.0CA	TVS	Vbr=6.40..7.00V, Vrwm=5.0V, 543A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
551	-	S5KP51	TVS	Vbr=56.7..69.3V, Vrwm=51V, 55A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
551A	-	S5KP51A	TVS	Vbr=56.7..62.7V, Vrwm=51V, 61A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
551C	-	S5KP51C	TVS	Vbr=56.7..69.3V, Vrwm=51V, 55A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
551CA	-	S5KP51CA	TVS	Vbr=56.7..62.7V, Vrwm=51V, 61A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
554	-	S5KP54	TVS	Vbr=60.0..73.3V, Vrwm=54V, 52A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
554A	-	S5KP54A	TVS	Vbr=60.0..66.3V, Vrwm=54V, 57A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
554C	-	S5KP54C	TVS	Vbr=60.0..73.3V, Vrwm=54V, 52A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
554CA	-	S5KP54CA	TVS	Vbr=60.0..66.3V, Vrwm=54V, 57A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
556	-	S5KP56	TVS	Vbr=62.2..76.1V, Vrwm=56V, 50A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
556A	-	S5KP56A	TVS	Vbr=62.2..68.8V, Vrwm=56V, 55A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
556C	-	S5KP56C	TVS	Vbr=62.2..76.1V, Vrwm=56V, 50A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
556CA	-	S5KP56CA	TVS	Vbr=62.2..68.8V, Vrwm=56V, 55A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
558	-	S5KP58	TVS	Vbr=64.4..78.7V, Vrwm=58V, 49A, 5000W(1ms)	TO-263	68ap	-	10a	Eic



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
558A	-	S5KP58A	TVS	Vbr=64.4..71.2V, Vrwm=58V, 53A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
558C	-	S5KP58C	TVS	Vbr=64.4..78.7V, Vrwm=58V, 49A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
558CA	-	S5KP58CA	TVS	Vbr=64.4..71.2V, Vrwm=58V, 53A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
56.0	-	S5KP6.0	TVS	Vbr=6.67..8.15V, Vrwm=6.0V, 439A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
56.0A	-	S5KP6.0A	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 485A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
56.0C	-	S5KP6.0C	TVS	Vbr=6.67..8.15V, Vrwm=6.0V, 439A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
56.0CA	-	S5KP6.0CA	TVS	Vbr=6.67..7.37V, Vrwm=6.0V, 485A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
56.5	-	S5KP6.5	TVS	Vbr=7.22..8.82V, Vrwm=6.5V, 407A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
56.5A	-	S5KP6.5A	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 447A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
56.5C	-	S5KP6.5C	TVS	Vbr=7.22..8.82V, Vrwm=6.5V, 407A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
56.5CA	-	S5KP6.5CA	TVS	Vbr=7.22..7.98V, Vrwm=6.5V, 447A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
560	-	S5KP60	TVS	Vbr=66.7..81.5V, Vrwm=60V, 47A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
560A	-	S5KP60A	TVS	Vbr=66.7..73.7V, Vrwm=60V, 52A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
560C	-	S5KP60C	TVS	Vbr=66.7..81.5V, Vrwm=60V, 47A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
560CA	-	S5KP60CA	TVS	Vbr=66.7..73.7V, Vrwm=60V, 52A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
564	-	S5KP64	TVS	Vbr=71.1..96.9V, Vrwm=64V, 44A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
564A	-	S5KP64A	TVS	Vbr=71.1..78.6V, Vrwm=64V, 49A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
564C	-	S5KP64C	TVS	Vbr=71.1..96.9V, Vrwm=64V, 44A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
564CA	-	S5KP64CA	TVS	Vbr=71.1..78.6V, Vrwm=64V, 49A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
57.0	-	S5KP7.0	TVS	Vbr=7.78..9.51V, Vrwm=7.0V, 378A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
57.0A	-	S5KP7.0A	TVS	Vbr=7.78..8.60V, Vrwm=7.0V, 417A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
57.0C	-	S5KP7.0C	TVS	Vbr=7.78..9.51V, Vrwm=7.0V, 378A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
57.0CA	-	S5KP7.0CA	TVS	Vbr=7.78..8.60V, Vrwm=7.0V, 417A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
57.5	-	S5KP7.5	TVS	Vbr=8.33..10.2V, Vrwm=7.5V, 350A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
57.5A	-	S5KP7.5A	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 388A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
57.5C	-	S5KP7.5C	TVS	Vbr=8.33..10.2V, Vrwm=7.5V, 350A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
57.5CA	-	S5KP7.5CA	TVS	Vbr=8.33..9.21V, Vrwm=7.5V, 388A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
570	-	S5KP70	TVS	Vbr=77.6..95.1V, Vrwm=70V, 40A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
570A	-	S5KP70A	TVS	Vbr=77.6..86.0V, Vrwm=70V, 44A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
570C	-	S5KP70C	TVS	Vbr=77.6..95.1V, Vrwm=70V, 40A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
570CA	-	S5KP70CA	TVS	Vbr=77.6..86.0V, Vrwm=70V, 44A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
575	-	S5KP75	TVS	Vbr=83.3..102V, Vrwm=75V, 37A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
575A	-	S5KP75A	TVS	Vbr=83.3..92.1V, Vrwm=75V, 41A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
575C	-	S5KP75C	TVS	Vbr=83.3..102V, Vrwm=75V, 37A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
575CA	-	S5KP75CA	TVS	Vbr=83.3..92.1V, Vrwm=75V, 41A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
578	-	S5KP78	TVS	Vbr=86.7..106V, Vrwm=78V, 36A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
578A	-	S5KP78A	TVS	Vbr=86.7..95.8V, Vrwm=78V, 40A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
578C	-	S5KP78C	TVS	Vbr=86.7..106V, Vrwm=78V, 36A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
578CA	-	S5KP78CA	TVS	Vbr=86.7..95.8V, Vrwm=78V, 40A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
58.0	-	S5KP8.0	TVS	Vbr=8.89..10.9V, Vrwm=8.0V, 333A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
58.0A	-	S5KP8.0A	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 367A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
58.0C	-	S5KP8.0C	TVS	Vbr=8.89..10.9V, Vrwm=8.0V, 333A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
58.0CA	-	S5KP8.0CA	TVS	Vbr=8.89..9.83V, Vrwm=8.0V, 367A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
58.5	-	S5KP8.5	TVS	Vbr=9.44..11.5V, Vrwm=8.5V, 314A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
58.5A	-	S5KP8.5A	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 347A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
58.5C	-	S5KP8.5C	TVS	Vbr=9.44..11.5V, Vrwm=8.5V, 314A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
58.5CA	-	S5KP8.5CA	TVS	Vbr=9.44..10.4V, Vrwm=8.5V, 347A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
585	-	S5KP85	TVS	Vbr=94.4..115V, Vrwm=85V, 33A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
585A	-	S5KP85A	TVS	Vbr=94.4..104V, Vrwm=85V, 36A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
585C	-	S5KP85C	TVS	Vbr=94.4..115V, Vrwm=85V, 33A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
585CA	-	S5KP85CA	TVS	Vbr=94.4..104V, Vrwm=85V, 36A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
58A	-	3PMT58A	TVS	Vvm=58V, Vbr=64.4V, Vcl=93.6V, 16.0A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
58CA	-	3PMT58CA	TVS	Vvm=58V, Vbr=64.4V, Vcl=93.6V, 16.0A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
59.0	-	S5KP9.0	TVS	Vbr=10.0..12.2V, Vrwm=9.0V, 295A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
59.0A	-	S5KP9.0A	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 325A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
59.0C	-	S5KP9.0C	TVS	Vbr=10.0..12.2V, Vrwm=9.0V, 295A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
59.0CA	-	S5KP9.0CA	TVS	Vbr=10.0..11.1V, Vrwm=9.0V, 325A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
590	-	S5KP90	TVS	Vbr=100..122V, Vrwm=90V, 31A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
590A	-	S5KP90A	TVS	Vbr=100..111V, Vrwm=90V, 34A, 5000W(1ms)	TO-263	68ap	-	10a	Eic
590C	-	S5KP90C	TVS	Vbr=100..122V, Vrwm=90V, 31A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
590CA	-	S5KP90CA	TVS	Vbr=100..111V, Vrwm=90V, 34A, 5000W(1ms), Bidir.	TO-263	68ao	-	10a	Eic
6.0A	-	3PMT6.0A	TVS	Vvm=6V, Vbr=6.67V, Vcl=10.3V, 145.6A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
6.0CA	-	3PMT6.0CA	TVS	Vvm=6V, Vbr=6.67V, Vcl=10.3V, 145.6A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
6.5A	-	3PMT6.5A	TVS	Vvm=6.5V, Vbr=7.22V, Vcl=11.2V, 133.9A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
6.5CA	-	3PMT6.5CA	TVS	Vvm=6.5V, Vbr=7.22V, Vcl=11.2V, 133.9A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
60A	-	3PMT60A	TVS	Vvm=60V, Vbr=66.7V, Vcl=96.8V, 15.5A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
60CA	-	3PMT60CA	TVS	Vvm=60V, Vbr=66.7V, Vcl=96.8V, 15.5A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
61R-10	-	AP7361-10D	LVR-IC	LDO, 1.0V±2%, 1A	TO-252	68hn	VR4	10f	Di
61R-12	-	AP7361-12D	LVR-IC	LDO, 1.2V±2%, 1A	TO-252	68hn	VR4	10f	Di
61R-15	-	AP7361-15D	LVR-IC	LDO, 1.5V±2%, 1A	TO-252	68hn	VR4	10f	Di



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
61R-18	-	AP7361-18D	LVR-IC	LDO, 1.8V±2%, 1A	TO-252	68hn	VR4	10f	Di
61R-25	-	AP7361-25D	LVR-IC	LDO, 2.5V±2%, 1A	TO-252	68hn	VR4	10f	Di
61R-28	-	AP7361-28D	LVR-IC	LDO, 2.8V±2%, 1A	TO-252	68hn	VR4	10f	Di
61R-33	-	AP7361-33D	LVR-IC	LDO, 3.3V±2%, 1A	TO-252	68hn	VR4	10f	Di
64A	-	3PMT64A	TVS	Vvm=64V, Vbr=71.1V, Vcl=103.0V, 14.6A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
64CA	-	3PMT64CA	TVS	Vvm=64V, Vbr=71.1V, Vcl=103.0V, 14.6A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
7.0A	-	3PMT7.0A	TVS	Vvm=7V, Vbr=7.78V, Vcl=12.0V, 125.0A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
7.0CA	-	3PMT7.0CA	TVS	Vvm=7V, Vbr=7.78V, Vcl=12.0V, 125.0A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
7.5A	-	3PMT7.5A	TVS	Vvm=7.5V, Vbr=8.33V, Vcl=12.9V, 116.3A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
7.5CA	-	3PMT7.5CA	TVS	Vvm=7.5V, Vbr=8.33V, Vcl=12.9V, 116.3A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
70A	-	3PMT70A	TVS	Vvm=70V, Vbr=77.8V, Vcl=113V, 13.3A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
70CA	-	3PMT70CA	TVS	Vvm=70V, Vbr=77.8V, Vcl=113V, 13.3A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
71J181C	-	R1171J181C	LVR-IC	LDO, 1.8V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J181C5	-	R1171J181C5	LVR-IC	LDO, 1.8V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J181D	-	R1171J181D	LVR-IC	LDO, 1.8V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J181D5	-	R1171J181D5	LVR-IC	LDO, 1.85V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J191C	-	R1171J191C	LVR-IC	LDO, 1.9V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J191D	-	R1171J191D	LVR-IC	LDO, 1.9V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J201C	-	R1171J201C	LVR-IC	LDO, 2.0V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J201D	-	R1171J201D	LVR-IC	LDO, 2.0V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J211C	-	R1171J211C	LVR-IC	LDO, 2.1V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J211D	-	R1171J211D	LVR-IC	LDO, 2.1V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J221C	-	R1171J221C	LVR-IC	LDO, 2.2V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J221D	-	R1171J221D	LVR-IC	LDO, 2.2V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J231C	-	R1171J231C	LVR-IC	LDO, 2.3V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J231D	-	R1171J231D	LVR-IC	LDO, 2.3V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J241C	-	R1171J241C	LVR-IC	LDO, 2.4V±2%, 2A -CE	TO-252-5	69x1	VR4	10d	Ric
71J241D	-	R1171J241D	LVR-IC	LDO, 2.4V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J251C	-	R1171J251C	LVR-IC	LDO, 2.5V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J251D	-	R1171J251D	LVR-IC	LDO, 2.5V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J261C	-	R1171J261C	LVR-IC	LDO, 2.6V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J261D	-	R1171J261D	LVR-IC	LDO, 2.6V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J271C	-	R1171J271C	LVR-IC	LDO, 2.7V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J271D	-	R1171J271D	LVR-IC	LDO, 2.7V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J281C	-	R1171J281C	LVR-IC	LDO, 2.8V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J281C5	-	R1171J281C5	LVR-IC	LDO, 2.85V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J281D	-	R1171J281D	LVR-IC	LDO, 2.8V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J281D5	-	R1171J281D5	LVR-IC	LDO, 2.85V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J291C	-	R1171J291C	LVR-IC	LDO, 2.9V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J291D	-	R1171J291D	LVR-IC	LDO, 2.9V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J301C	-	R1171J301C	LVR-IC	LDO, 3.0V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J301D	-	R1171J301D	LVR-IC	LDO, 3.0V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J311C	-	R1171J311C	LVR-IC	LDO, 3.1V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J311D	-	R1171J311D	LVR-IC	LDO, 3.1V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J321C	-	R1171J321C	LVR-IC	LDO, 3.2V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J321D	-	R1171J321D	LVR-IC	LDO, 3.2V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J331C	-	R1171J331C	LVR-IC	LDO, 3.3V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J331D	-	R1171J331D	LVR-IC	LDO, 3.3V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J341C	-	R1171J341C	LVR-IC	LDO, 3.4V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J341D	-	R1171J341D	LVR-IC	LDO, 3.4V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J351C	-	R1171J351C	LVR-IC	LDO, 3.5V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J351D	-	R1171J351D	LVR-IC	LDO, 3.5V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J361C	-	R1171J361C	LVR-IC	LDO, 3.6V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J361D	-	R1171J361D	LVR-IC	LDO, 3.6V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J371C	-	R1171J371C	LVR-IC	LDO, 3.7V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J371D	-	R1171J371D	LVR-IC	LDO, 3.7V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J381C	-	R1171J381C	LVR-IC	LDO, 3.8V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J381D	-	R1171J381D	LVR-IC	LDO, 3.8V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J391C	-	R1171J391C	LVR-IC	LDO, 3.9V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J391D	-	R1171J391D	LVR-IC	LDO, 3.9V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J401C	-	R1171J401C	LVR-IC	LDO, 4.0V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J401D	-	R1171J401D	LVR-IC	LDO, 4.0V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J411C	-	R1171J411C	LVR-IC	LDO, 4.1V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J411D	-	R1171J411D	LVR-IC	LDO, 4.1V±2%, 2A +CE	TO-252-5	69x1	VR4	10d	Ric
71J421C	-	R1171J421C	LVR-IC	LDO, 4.2V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J421D	-	R1171J421D	LVR-IC	LDO, 4.2V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J431C	-	R1171J431C	LVR-IC	LDO, 4.3V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J431D	-	R1171J431D	LVR-IC	LDO, 4.3V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J441C	-	R1171J441C	LVR-IC	LDO, 4.4V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J441D	-	R1171J441D	LVR-IC	LDO, 4.4V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
71J451C	-	R1171J451C	LVR-IC	LDO, 4.5V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J451D	-	R1171J451D	LVR-IC	LDO, 4.5V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J461C	-	R1171J461C	LVR-IC	LDO, 4.6V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J461D	-	R1171J461D	LVR-IC	LDO, 4.6V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J471C	-	R1171J471C	LVR-IC	LDO, 4.7V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J471D	-	R1171J471D	LVR-IC	LDO, 4.7V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J481C	-	R1171J481C	LVR-IC	LDO, 4.8V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J481D	-	R1171J481D	LVR-IC	LDO, 4.8V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J491C	-	R1171J491C	LVR-IC	LDO, 4.9V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J491D	-	R1171J491D	LVR-IC	LDO, 4.9V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
71J501C	-	R1171J501C	LVR-IC	LDO, 5.0V±2%, 2A, -CE	TO-252-5	69x1	VR4	10d	Ric
71J501D	-	R1171J501D	LVR-IC	LDO, 5.0V±2%, 2A, +CE	TO-252-5	69x1	VR4	10d	Ric
7-285	-	NCP1117DT285T3	LVR-IC	LDO, 2.85V±1%, 800mA	D-PAK	68wb	VR1	10g	Ons
7-285V	-	NCV1117DT285T3	LVR-IC	LDO, 2.85V±1%, 800mA	D-PAK	68wb	VR1	10g	Ons
75A	-	3PMT75A	TVS	Vvm=75V, Vbr=83.3V, Vcl=121V, 12.4A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
75CA	-	3PMT75CA	TVS	Vvm=75V, Vbr=83.3V, Vcl=121V, 12.4A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
772	-	CH772PT	Si-pnp	AF, Sw, 30V, 3A, B=100..500, 100MHz	D-PAK	68tb	-	10a	Chm
78A	-	3PMT78A	TVS	Vvm=78V, Vbr=86.7V, Vcl=126V, 11.4A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
78CA	-	3PMT78CA	TVS	Vvm=78V, Vbr=86.7V, Vcl=126V, 11.4A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
8.0A	-	3PMT8.0A	TVS	Vvm=8V, Vbr=8.89V, Vcl=13.6V, 110.3A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
8.0CA	-	3PMT8.0CA	TVS	Vvm=8V, Vbr=8.89V, Vcl=13.6V, 110.3A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
8.5A	-	3PMT8.5A	TVS	Vvm=8.5V, Vbr=9.94V, Vcl=14.4V, 104.2A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
8.5CA	-	3PMT8.5CA	TVS	Vvm=8.5V, Vbr=9.94V, Vcl=14.4V, 104.2A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
84K	-	XC6701D18JR	LVR-IC	1.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
84L	-	XC6701D19JR	LVR-IC	1.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
84M	-	XC6701D20JR	LVR-IC	2.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
84N	-	XC6701D21JR	LVR-IC	2.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
84P	-	XC6701D22JR	LVR-IC	2.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
84R	-	XC6701D23JR	LVR-IC	2.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
84S	-	XC6701D24JR	LVR-IC	2.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
84T	-	XC6701D25JR	LVR-IC	2.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
84U	-	XC6701D26JR	LVR-IC	2.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
84V	-	XC6701D27JR	LVR-IC	2.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
84X	-	XC6701D28JR	LVR-IC	2.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
84Y	-	XC6701D29JR	LVR-IC	2.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
84Z	-	XC6701D30JR	LVR-IC	3.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
850	-	XC6701D31JR	LVR-IC	3.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
851	-	XC6701D32JR	LVR-IC	3.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
852	-	XC6701D33JR	LVR-IC	3.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
853	-	XC6701D34JR	LVR-IC	3.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
854	-	XC6701D35JR	LVR-IC	3.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
855	-	XC6701D36JR	LVR-IC	3.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
856	-	XC6701D37JR	LVR-IC	3.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
857	-	XC6701D38JR	LVR-IC	3.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
858	-	XC6701D39JR	LVR-IC	3.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
859	-	XC6701D40JR	LVR-IC	4.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85A	-	3PMT85A	TVS	Vvm=85V, Vbr=94.4V, Vcl=137V, 10.4A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
85A	-	XC6701D41JR	LVR-IC	4.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85B	-	XC6701D42JR	LVR-IC	4.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85C	-	XC6701D43JR	LVR-IC	4.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85CA	-	3PMT85CA	TVS	Vvm=85V, Vbr=94.4V, Vcl=137V, 10.4A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
85D	-	XC6701D44JR	LVR-IC	4.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85E	-	XC6701D45JR	LVR-IC	4.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85F	-	XC6701D46JR	LVR-IC	4.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85H	-	XC6701D47JR	LVR-IC	4.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85K	-	XC6701D48JR	LVR-IC	4.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85L	-	XC6701D49JR	LVR-IC	4.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85M	-	XC6701D50JR	LVR-IC	5.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85N	-	XC6701D51JR	LVR-IC	5.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85P	-	XC6701D52JR	LVR-IC	5.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85R	-	XC6701D53JR	LVR-IC	5.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85S	-	XC6701D54JR	LVR-IC	5.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85T	-	XC6701D55JR	LVR-IC	5.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85U	-	XC6701D56JR	LVR-IC	5.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85V	-	XC6701D57JR	LVR-IC	5.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85X	-	XC6701D58JR	LVR-IC	5.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85Y	-	XC6701D59JR	LVR-IC	5.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
85Z	-	XC6701D60JR	LVR-IC	6.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
860	-	XC6701D61JR	LVR-IC	6.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
861	-	XC6701D62JR	LVR-IC	6.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
862	-	XC6701D63JR	LVR-IC	6.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
863	-	XC6701D64JR	LVR-IC	6.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
864	-	XC6701D65JR	LVR-IC	6.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
865	-	XC6701D66JR	LVR-IC	6.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
866	-	XC6701D67JR	LVR-IC	6.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
867	-	XC6701D68JR	LVR-IC	6.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
868	-	XC6701D69JR	LVR-IC	6.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
869	-	XC6701D70JR	LVR-IC	7.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86A	-	XC6701D71JR	LVR-IC	7.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86B	-	XC6701D72JR	LVR-IC	7.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86C	-	XC6701D73JR	LVR-IC	7.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86D	-	XC6701D74JR	LVR-IC	7.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86E	-	XC6701D75JR	LVR-IC	7.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86F	-	XC6701D76JR	LVR-IC	7.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86H	-	XC6701D77JR	LVR-IC	7.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86K	-	XC6701D78JR	LVR-IC	7.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86L	-	XC6701D79JR	LVR-IC	7.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86M	-	XC6701D80JR	LVR-IC	8.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86N	-	XC6701D81JR	LVR-IC	8.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86P	-	XC6701D82JR	LVR-IC	8.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86R	-	XC6701D83JR	LVR-IC	8.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86S	-	XC6701D84JR	LVR-IC	8.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86T	-	XC6701D85JR	LVR-IC	8.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86U	-	XC6701D86JR	LVR-IC	8.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86V	-	XC6701D87JR	LVR-IC	8.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86X	-	XC6701D88JR	LVR-IC	8.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86Y	-	XC6701D89JR	LVR-IC	8.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
86Z	-	XC6701D90JR	LVR-IC	9.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
870	-	XC6701D91JR	LVR-IC	9.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
871	-	XC6701D92JR	LVR-IC	9.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
872	-	XC6701D93JR	LVR-IC	9.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
873	-	XC6701D94JR	LVR-IC	9.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
874	-	XC6701D95JR	LVR-IC	9.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
875	-	XC6701D96JR	LVR-IC	9.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
876	-	XC6701D97JR	LVR-IC	9.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
877	-	XC6701D98JR	LVR-IC	9.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
878	-	XC6701D99JR	LVR-IC	9.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
879	-	XC6701DA0JR	LVR-IC	10.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87A	-	XC6701DA1JR	LVR-IC	10.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87B	-	XC6701DA2JR	LVR-IC	10.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87C	-	XC6701DA3JR	LVR-IC	10.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87D	-	XC6701DA4JR	LVR-IC	10.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87E	-	XC6701DA5JR	LVR-IC	10.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87F	-	XC6701DA6JR	LVR-IC	10.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87H	-	XC6701DA7JR	LVR-IC	10.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87K	-	XC6701DA8JR	LVR-IC	10.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87L	-	XC6701DA9JR	LVR-IC	10.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87M	-	XC6701DB0JR	LVR-IC	11.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87N	-	XC6701DB1JR	LVR-IC	11.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87P	-	XC6701DB2JR	LVR-IC	11.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87R	-	XC6701DB3JR	LVR-IC	11.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87S	-	XC6701DB4JR	LVR-IC	11.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87T	-	XC6701DB5JR	LVR-IC	11.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87U	-	XC6701DB6JR	LVR-IC	11.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87V	-	XC6701DB7JR	LVR-IC	11.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87X	-	XC6701DB8JR	LVR-IC	11.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87Y	-	XC6701DB9JR	LVR-IC	11.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
87Z	-	XC6701DC0JR	LVR-IC	12.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
882	-	CH882PT	Si-npn	AF, Sw, 30V, 3A, B=100..500, 100MHz	D-PAK	68tb	-	10a	Chm
8C0	-	XC6701DC1JR	LVR-IC	12.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8C1	-	XC6701DC2JR	LVR-IC	12.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8C2	-	XC6701DC3JR	LVR-IC	12.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8C3	-	XC6701DC4JR	LVR-IC	12.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8C4	-	XC6701DC5JR	LVR-IC	12.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8C5	-	XC6701DC6JR	LVR-IC	12.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8C6	-	XC6701DC7JR	LVR-IC	12.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8C7	-	XC6701DC8JR	LVR-IC	12.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8C8	-	XC6701DC9JR	LVR-IC	12.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8C9	-	XC6701DD0JR	LVR-IC	13.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CA	-	XC6701DD1JR	LVR-IC	13.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
8CB	-	XC6701DD2JR	LVR-IC	13.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CC	-	XC6701DD3JR	LVR-IC	13.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CD	-	XC6701DD4JR	LVR-IC	13.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CE	-	XC6701DD5JR	LVR-IC	13.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CF	-	XC6701DD6JR	LVR-IC	13.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CH	-	XC6701DD7JR	LVR-IC	13.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CK	-	XC6701DD8JR	LVR-IC	13.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CL	-	XC6701DD9JR	LVR-IC	13.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CM	-	XC6701DE0JR	LVR-IC	14.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CN	-	XC6701DE1JR	LVR-IC	14.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CP	-	XC6701DE2JR	LVR-IC	14.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CR	-	XC6701DE3JR	LVR-IC	14.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CS	-	XC6701DE4JR	LVR-IC	14.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CT	-	XC6701DE5JR	LVR-IC	14.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CU	-	XC6701DE6JR	LVR-IC	14.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CV	-	XC6701DE7JR	LVR-IC	14.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CX	-	XC6701DE8JR	LVR-IC	14.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CY	-	XC6701DE9JR	LVR-IC	14.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8CZ	-	XC6701DF0JR	LVR-IC	15.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8D0	-	XC6701DF1JR	LVR-IC	15.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8D1	-	XC6701DF2JR	LVR-IC	15.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8D2	-	XC6701DF3JR	LVR-IC	15.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8D3	-	XC6701DF4JR	LVR-IC	15.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8D4	-	XC6701DF5JR	LVR-IC	15.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8D5	-	XC6701DF6JR	LVR-IC	15.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8D6	-	XC6701DF7JR	LVR-IC	15.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8D7	-	XC6701DF8JR	LVR-IC	15.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8D8	-	XC6701DF9JR	LVR-IC	15.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8D9	-	XC6701DG0JR	LVR-IC	16.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DA	-	XC6701DG1JR	LVR-IC	16.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DB	-	XC6701DG2JR	LVR-IC	16.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DC	-	XC6701DG3JR	LVR-IC	16.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DD	-	XC6701DG4JR	LVR-IC	16.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DE	-	XC6701DG5JR	LVR-IC	16.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DF	-	XC6701DG6JR	LVR-IC	16.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DH	-	XC6701DG7JR	LVR-IC	16.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DK	-	XC6701DG8JR	LVR-IC	16.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DL	-	XC6701DG9JR	LVR-IC	16.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DM	-	XC6701DH0JR	LVR-IC	17.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DN	-	XC6701DH1JR	LVR-IC	17.1V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DP	-	XC6701DH2JR	LVR-IC	17.2V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DR	-	XC6701DH3JR	LVR-IC	17.3V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DS	-	XC6701DH4JR	LVR-IC	17.4V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DT	-	XC6701DH5JR	LVR-IC	17.5V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DU	-	XC6701DH6JR	LVR-IC	17.6V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DV	-	XC6701DH7JR	LVR-IC	17.7V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DX	-	XC6701DH8JR	LVR-IC	17.8V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DY	-	XC6701DH9JR	LVR-IC	17.9V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
8DZ	-	XC6701DJ0JR	LVR-IC	18.0V±2%, 150mA	TO-252	68eu	VR1	10c	Tor
9.0A	-	3PMT9.0A	TVS	Vvm=9.0V, Vbr=10.0V, Vcl=15.4V, 97.4A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
9.0CA	-	3PMT9.0CA	TVS	Vvm=9.0V, Vbr=10.0V, Vcl=15.4V, 97.4A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
90A	-	3PMT90A	TVS	Vvm=90V, Vbr=100V, Vcl=146V, 10.3A, 1500W(1ms)	POWERMITE	68dh	-	10a	Msc
90CA	-	3PMT90CA	TVS	Vvm=90V, Vbr=100V, Vcl=146V, 10.3A, 1500W(1ms), Bidir.	POWERMITE	68dp	-	10a	Msc
A1J030B	-	R1501J030B	LVR-IC	LDO, 3.0V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J031B	-	R1501J031B	LVR-IC	LDO, 3.1V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J032B	-	R1501J032B	LVR-IC	LDO, 3.2V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J033B	-	R1501J033B	LVR-IC	LDO, 3.3V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J034B	-	R1501J034B	LVR-IC	LDO, 3.4V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J035B	-	R1501J035B	LVR-IC	LDO, 3.5V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J036B	-	R1501J036B	LVR-IC	LDO, 3.6V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J037B	-	R1501J037B	LVR-IC	LDO, 3.7V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J038B	-	R1501J038B	LVR-IC	LDO, 3.8V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J039B	-	R1501J039B	LVR-IC	LDO, 3.9V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J040B	-	R1501J040B	LVR-IC	LDO, 4.0V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J041B	-	R1501J041B	LVR-IC	LDO, 4.1V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J042B	-	R1501J042B	LVR-IC	LDO, 4.2V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J043B	-	R1501J043B	LVR-IC	LDO, 4.3V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J044B	-	R1501J044B	LVR-IC	LDO, 4.4V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J045B	-	R1501J045B	LVR-IC	LDO, 4.5V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J046B	-	R1501J046B	LVR-IC	LDO, 4.6V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A1J047B	-	R1501J047B	LVR-IC	LDO, 4.7V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J048B	-	R1501J048B	LVR-IC	LDO, 4.8V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J049B	-	R1501J049B	LVR-IC	LDO, 4.9V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J050B	-	R1501J050B	LVR-IC	LDO, 5.0V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J051B	-	R1501J051B	LVR-IC	LDO, 5.1V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J052B	-	R1501J052B	LVR-IC	LDO, 5.2V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J053B	-	R1501J053B	LVR-IC	LDO, 5.3V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J054B	-	R1501J054B	LVR-IC	LDO, 5.4V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J055B	-	R1501J055B	LVR-IC	LDO, 5.5V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J056B	-	R1501J056B	LVR-IC	LDO, 5.6V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J057B	-	R1501J057B	LVR-IC	LDO, 5.7V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J058B	-	R1501J058B	LVR-IC	LDO, 5.8V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J059B	-	R1501J059B	LVR-IC	LDO, 5.9V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J060B	-	R1501J060B	LVR-IC	LDO, 6.0V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J061B	-	R1501J061B	LVR-IC	LDO, 6.1V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J062B	-	R1501J062B	LVR-IC	LDO, 6.2V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J063B	-	R1501J063B	LVR-IC	LDO, 6.3V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J064B	-	R1501J064B	LVR-IC	LDO, 6.4V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J065B	-	R1501J065B	LVR-IC	LDO, 6.5V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J066B	-	R1501J066B	LVR-IC	LDO, 6.6V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J067B	-	R1501J067B	LVR-IC	LDO, 6.7V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J068B	-	R1501J068B	LVR-IC	LDO, 6.8V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J069B	-	R1501J069B	LVR-IC	LDO, 6.9V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J070B	-	R1501J070B	LVR-IC	LDO, 7.0V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J071B	-	R1501J071B	LVR-IC	LDO, 7.1V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J072B	-	R1501J072B	LVR-IC	LDO, 7.2V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J073B	-	R1501J073B	LVR-IC	LDO, 7.3V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J074B	-	R1501J074B	LVR-IC	LDO, 7.4V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J075B	-	R1501J075B	LVR-IC	LDO, 7.5V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J076B	-	R1501J076B	LVR-IC	LDO, 7.6V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J077B	-	R1501J077B	LVR-IC	LDO, 7.7V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J078B	-	R1501J078B	LVR-IC	LDO, 7.8V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J079B	-	R1501J079B	LVR-IC	LDO, 7.9V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J080B	-	R1501J080B	LVR-IC	LDO, 8.0V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J081B	-	R1501J081B	LVR-IC	LDO, 8.1V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J082B	-	R1501J082B	LVR-IC	LDO, 8.2V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J083B	-	R1501J083B	LVR-IC	LDO, 8.3V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J084B	-	R1501J084B	LVR-IC	LDO, 8.4V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J085B	-	R1501J085B	LVR-IC	LDO, 8.5V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J086B	-	R1501J086B	LVR-IC	LDO, 8.6V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J087B	-	R1501J087B	LVR-IC	LDO, 8.7V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J088B	-	R1501J088B	LVR-IC	LDO, 8.8V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J089B	-	R1501J089B	LVR-IC	LDO, 8.9V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J090B	-	R1501J090B	LVR-IC	LDO, 9.0V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J091B	-	R1501J091B	LVR-IC	LDO, 9.1V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J092B	-	R1501J092B	LVR-IC	LDO, 9.2V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J093B	-	R1501J093B	LVR-IC	LDO, 9.3V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J094B	-	R1501J094B	LVR-IC	LDO, 9.4V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J095B	-	R1501J095B	LVR-IC	LDO, 9.5V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J096B	-	R1501J096B	LVR-IC	LDO, 9.6V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J097B	-	R1501J097B	LVR-IC	LDO, 9.7V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J098B	-	R1501J098B	LVR-IC	LDO, 9.8V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J099B	-	R1501J099B	LVR-IC	LDO, 9.9V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J100B	-	R1501J100B	LVR-IC	LDO, 10.0V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J101B	-	R1501J101B	LVR-IC	LDO, 10.1V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J102B	-	R1501J102B	LVR-IC	LDO, 10.2V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J103B	-	R1501J103B	LVR-IC	LDO, 10.3V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J104B	-	R1501J104B	LVR-IC	LDO, 10.4V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J105B	-	R1501J105B	LVR-IC	LDO, 10.5V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J106B	-	R1501J106B	LVR-IC	LDO, 10.6V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J107B	-	R1501J107B	LVR-IC	LDO, 10.7V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J108B	-	R1501J108B	LVR-IC	LDO, 10.8V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J109B	-	R1501J109B	LVR-IC	LDO, 10.9V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J110B	-	R1501J110B	LVR-IC	LDO, 11.0V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J111B	-	R1501J111B	LVR-IC	LDO, 11.1V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J112B	-	R1501J112B	LVR-IC	LDO, 11.2V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J113B	-	R1501J113B	LVR-IC	LDO, 11.3V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J114B	-	R1501J114B	LVR-IC	LDO, 11.4V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J115B	-	R1501J115B	LVR-IC	LDO, 11.5V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J116B	-	R1501J116B	LVR-IC	LDO, 11.6V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
A1J117B	-	R1501J117B	LVR-IC	LDO, 11.7V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J118B	-	R1501J118B	LVR-IC	LDO, 11.8V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J119B	-	R1501J119B	LVR-IC	LDO, 11.9V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J120B	-	R1501J120B	LVR-IC	LDO, 12.0V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J125B	-	R1501J125B	LVR-IC	LDO, 12.5V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J130B	-	R1501J130B	LVR-IC	LDO, 13.0V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J135B	-	R1501J135B	LVR-IC	LDO, 13.5V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J140B	-	R1501J140B	LVR-IC	LDO, 14.0V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J145B	-	R1501J145B	LVR-IC	LDO, 14.5V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J150B	-	R1501J150B	LVR-IC	LDO, 15.0V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J155B	-	R1501J155B	LVR-IC	LDO, 15.5V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J160B	-	R1501J160B	LVR-IC	LDO, 16.0V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J165B	-	R1501J165B	LVR-IC	LDO, 16.5V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J170B	-	R1501J170B	LVR-IC	LDO, 17.0V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J175B	-	R1501J175B	LVR-IC	LDO, 17.5V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A1J180B	-	R1501J180B	LVR-IC	LDO, 18.0V±2%, 1A, +CE	TO-252-5	69x2	VR4	10d	Ric
A8827BB	-	AME8827-ACS330	LVR-IC	LDO, 3.3V±1.5%, 1A	TO-252	68eu	VR1	10a	Ame
A8827BG	-	AME8827-ACS250	LVR-IC	LDO, 2.5V±1.5%, 1A	TO-252	68eu	VR1	10a	Ame
A8827BI	-	AME8827-ACS180	LVR-IC	LDO, 1.8V±1.5%, 1A	TO-252	68eu	VR1	10a	Ame
A8827BK	-	AME8827-ACS120	LVR-IC	LDO, 1.2V±1.5%, 1A	TO-252	68eu	VR1	10a	Ame
B1035CL	-	MBRD1035CTL	Si-diode	Dual, Schottky barrier rectifier, 35V, 5A, Vf<0.47V(5A)	D-PAK	68bu	-	10a	Ons
B1545T	-	MBRB1545CT	Si-diode	Dual, Schottky barrier rectifier, 45V, 7.5A, Vf<0.57V(7.5A)	D2-PAK	68bu	-	10a	Ons
B1J020B	-	R1190J020B	LVR-IC	2.0V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J020D	-	R1190J020D	LVR-IC	2.0V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J021B	-	R1190J021B	LVR-IC	2.1V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J021D	-	R1190J021D	LVR-IC	2.1V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J022B	-	R1190J022B	LVR-IC	2.2V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J022D	-	R1190J022D	LVR-IC	2.2V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J023B	-	R1190J023B	LVR-IC	2.3V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J023D	-	R1190J023D	LVR-IC	2.3V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J024B	-	R1190J024B	LVR-IC	2.4V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J024D	-	R1190J024D	LVR-IC	2.4V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J025B	-	R1190J025B	LVR-IC	2.5V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J025D	-	R1190J025D	LVR-IC	2.5V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J026B	-	R1190J026B	LVR-IC	2.6V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J026D	-	R1190J026D	LVR-IC	2.6V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J027B	-	R1190J027B	LVR-IC	2.7V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J027D	-	R1190J027D	LVR-IC	2.7V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J028B	-	R1190J028B	LVR-IC	2.8V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J028D	-	R1190J028D	LVR-IC	2.8V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J029B	-	R1190J029B	LVR-IC	2.9V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J029D	-	R1190J029D	LVR-IC	2.9V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J030B	-	R1190J030B	LVR-IC	3.0V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J030D	-	R1190J030D	LVR-IC	3.0V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J031B	-	R1190J031B	LVR-IC	3.1V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J031D	-	R1190J031D	LVR-IC	3.1V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J032B	-	R1190J032B	LVR-IC	3.2V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J032D	-	R1190J032D	LVR-IC	3.2V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J033B	-	R1190J033B	LVR-IC	3.3V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J033D	-	R1190J033D	LVR-IC	3.3V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J034B	-	R1190J034B	LVR-IC	3.4V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J034D	-	R1190J034D	LVR-IC	3.4V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J035B	-	R1190J035B	LVR-IC	3.5V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J035D	-	R1190J035D	LVR-IC	3.5V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J036B	-	R1190J036B	LVR-IC	3.6V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J036D	-	R1190J036D	LVR-IC	3.6V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J037B	-	R1190J037B	LVR-IC	3.7V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J037D	-	R1190J037D	LVR-IC	3.7V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J038B	-	R1190J038B	LVR-IC	3.8V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J038D	-	R1190J038D	LVR-IC	3.8V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J039B	-	R1190J039B	LVR-IC	3.9V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J039D	-	R1190J039D	LVR-IC	3.9V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J040B	-	R1190J040B	LVR-IC	4.0V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J040D	-	R1190J040D	LVR-IC	4.0V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J041B	-	R1190J041B	LVR-IC	4.1V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J041D	-	R1190J041D	LVR-IC	4.1V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J042B	-	R1190J042B	LVR-IC	4.2V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J042D	-	R1190J042D	LVR-IC	4.2V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J043B	-	R1190J043B	LVR-IC	4.3V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J043D	-	R1190J043D	LVR-IC	4.3V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B1J044B	-	R1190J044B	LVR-IC	4.4V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J044D	-	R1190J044D	LVR-IC	4.4V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J045B	-	R1190J045B	LVR-IC	4.5V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J045D	-	R1190J045D	LVR-IC	4.5V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J046B	-	R1190J046B	LVR-IC	4.6V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J046D	-	R1190J046D	LVR-IC	4.6V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J047B	-	R1190J047B	LVR-IC	4.7V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J047D	-	R1190J047D	LVR-IC	4.7V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J048B	-	R1190J048B	LVR-IC	4.8V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J048D	-	R1190J048D	LVR-IC	4.8V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J049B	-	R1190J049B	LVR-IC	4.9V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J049D	-	R1190J049D	LVR-IC	4.9V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J050B	-	R1190J050B	LVR-IC	5.0V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J050D	-	R1190J050D	LVR-IC	5.0V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J051B	-	R1190J051B	LVR-IC	5.1V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J051D	-	R1190J051D	LVR-IC	5.1V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J052B	-	R1190J052B	LVR-IC	5.2V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J052D	-	R1190J052D	LVR-IC	5.2V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J053B	-	R1190J053B	LVR-IC	5.3V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J053D	-	R1190J053D	LVR-IC	5.3V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J054B	-	R1190J054B	LVR-IC	5.4V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J054D	-	R1190J054D	LVR-IC	5.4V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J055B	-	R1190J055B	LVR-IC	5.5V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J055D	-	R1190J055D	LVR-IC	5.5V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J056B	-	R1190J056B	LVR-IC	5.6V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J056D	-	R1190J056D	LVR-IC	5.6V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J057B	-	R1190J057B	LVR-IC	5.7V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J057D	-	R1190J057D	LVR-IC	5.7V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J058B	-	R1190J058B	LVR-IC	5.8V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J058D	-	R1190J058D	LVR-IC	5.8V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J059B	-	R1190J059B	LVR-IC	5.9V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J059D	-	R1190J059D	LVR-IC	5.9V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J060B	-	R1190J060B	LVR-IC	6.0V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J060D	-	R1190J060D	LVR-IC	6.0V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J061B	-	R1190J061B	LVR-IC	6.1V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J061D	-	R1190J061D	LVR-IC	6.1V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J062B	-	R1190J062B	LVR-IC	6.2V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J062D	-	R1190J062D	LVR-IC	6.2V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J063B	-	R1190J063B	LVR-IC	6.3V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J063D	-	R1190J063D	LVR-IC	6.3V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J064B	-	R1190J064B	LVR-IC	6.4V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J064D	-	R1190J064D	LVR-IC	6.4V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J065B	-	R1190J065B	LVR-IC	6.5V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J065D	-	R1190J065D	LVR-IC	6.5V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J066B	-	R1190J066B	LVR-IC	6.6V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J066D	-	R1190J066D	LVR-IC	6.6V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J067B	-	R1190J067B	LVR-IC	6.7V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J067D	-	R1190J067D	LVR-IC	6.7V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J068B	-	R1190J068B	LVR-IC	6.8V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J068D	-	R1190J068D	LVR-IC	6.8V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J069B	-	R1190J069B	LVR-IC	6.9V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J069D	-	R1190J069D	LVR-IC	6.9V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J070B	-	R1190J070B	LVR-IC	7.0V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J070D	-	R1190J070D	LVR-IC	7.0V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J071B	-	R1190J071B	LVR-IC	7.1V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J071D	-	R1190J071D	LVR-IC	7.1V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J072B	-	R1190J072B	LVR-IC	7.2V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J072D	-	R1190J072D	LVR-IC	7.2V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J073B	-	R1190J073B	LVR-IC	7.3V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J073D	-	R1190J073D	LVR-IC	7.3V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J074B	-	R1190J074B	LVR-IC	7.4V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J074D	-	R1190J074D	LVR-IC	7.4V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J075B	-	R1190J075B	LVR-IC	7.5V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J075D	-	R1190J075D	LVR-IC	7.5V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J076B	-	R1190J076B	LVR-IC	7.6V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J076D	-	R1190J076D	LVR-IC	7.6V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J077B	-	R1190J077B	LVR-IC	7.7V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J077D	-	R1190J077D	LVR-IC	7.7V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J078B	-	R1190J078B	LVR-IC	7.8V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J078D	-	R1190J078D	LVR-IC	7.8V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B1J079B	-	R1190J079B	LVR-IC	7.9V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J079D	-	R1190J079D	LVR-IC	7.9V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J080B	-	R1190J080B	LVR-IC	8.0V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J080D	-	R1190J080D	LVR-IC	8.0V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J081B	-	R1190J081B	LVR-IC	8.1V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J081D	-	R1190J081D	LVR-IC	8.1V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J082B	-	R1190J082B	LVR-IC	8.2V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J082D	-	R1190J082D	LVR-IC	8.2V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J083B	-	R1190J083B	LVR-IC	8.3V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J083D	-	R1190J083D	LVR-IC	8.3V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J084B	-	R1190J084B	LVR-IC	8.4V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J084D	-	R1190J084D	LVR-IC	8.4V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J085B	-	R1190J085B	LVR-IC	8.5V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J085D	-	R1190J085D	LVR-IC	8.5V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J086B	-	R1190J086B	LVR-IC	8.6V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J086D	-	R1190J086D	LVR-IC	8.6V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J087B	-	R1190J087B	LVR-IC	8.7V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J087D	-	R1190J087D	LVR-IC	8.7V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J088B	-	R1190J088B	LVR-IC	8.8V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J088D	-	R1190J088D	LVR-IC	8.8V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J089B	-	R1190J089B	LVR-IC	8.9V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J089D	-	R1190J089D	LVR-IC	8.9V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J090B	-	R1190J090B	LVR-IC	9.0V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J090D	-	R1190J090D	LVR-IC	9.0V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J091B	-	R1190J091B	LVR-IC	9.1V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J091D	-	R1190J091D	LVR-IC	9.1V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J092B	-	R1190J092B	LVR-IC	9.2V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J092D	-	R1190J092D	LVR-IC	9.2V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J093B	-	R1190J093B	LVR-IC	9.3V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J093D	-	R1190J093D	LVR-IC	9.3V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J094B	-	R1190J094B	LVR-IC	9.4V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J094D	-	R1190J094D	LVR-IC	9.4V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J095B	-	R1190J095B	LVR-IC	9.5V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J095D	-	R1190J095D	LVR-IC	9.5V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J096B	-	R1190J096B	LVR-IC	9.6V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J096D	-	R1190J096D	LVR-IC	9.6V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J097B	-	R1190J097B	LVR-IC	9.7V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J097D	-	R1190J097D	LVR-IC	9.7V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J098B	-	R1190J098B	LVR-IC	9.8V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J098D	-	R1190J098D	LVR-IC	9.8V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J099B	-	R1190J099B	LVR-IC	9.9V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J099D	-	R1190J099D	LVR-IC	9.9V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J100B	-	R1190J100B	LVR-IC	10.0V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J100D	-	R1190J100D	LVR-IC	10.0V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J101B	-	R1190J101B	LVR-IC	10.1V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J101D	-	R1190J101D	LVR-IC	10.1V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J102B	-	R1190J102B	LVR-IC	10.2V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J102D	-	R1190J102D	LVR-IC	10.2V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J103B	-	R1190J103B	LVR-IC	10.3V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J103D	-	R1190J103D	LVR-IC	10.3V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J104B	-	R1190J104B	LVR-IC	10.4V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J104D	-	R1190J104D	LVR-IC	10.4V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J105B	-	R1190J105B	LVR-IC	10.5V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J105D	-	R1190J105D	LVR-IC	10.5V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J106B	-	R1190J106B	LVR-IC	10.6V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J106D	-	R1190J106D	LVR-IC	10.6V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J107B	-	R1190J107B	LVR-IC	10.7V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J107D	-	R1190J107D	LVR-IC	10.7V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J108B	-	R1190J108B	LVR-IC	10.8V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J108D	-	R1190J108D	LVR-IC	10.8V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J109B	-	R1190J109B	LVR-IC	10.9V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J109D	-	R1190J109D	LVR-IC	10.9V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J110B	-	R1190J110B	LVR-IC	11.0V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J110D	-	R1190J110D	LVR-IC	11.0V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J111B	-	R1190J111B	LVR-IC	11.1V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J111D	-	R1190J111D	LVR-IC	11.1V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J112B	-	R1190J112B	LVR-IC	11.2V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J112D	-	R1190J112D	LVR-IC	11.2V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J113B	-	R1190J113B	LVR-IC	11.3V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J113D	-	R1190J113D	LVR-IC	11.3V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
B1J114B	-	R1190J114B	LVR-IC	11.4V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J114D	-	R1190J114D	LVR-IC	11.4V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J115B	-	R1190J115B	LVR-IC	11.5V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J115D	-	R1190J115D	LVR-IC	11.5V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J116B	-	R1190J116B	LVR-IC	11.6V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J116D	-	R1190J116D	LVR-IC	11.6V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J117B	-	R1190J117B	LVR-IC	11.7V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J117D	-	R1190J117D	LVR-IC	11.7V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J118B	-	R1190J118B	LVR-IC	11.8V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J118D	-	R1190J118D	LVR-IC	11.8V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J119B	-	R1190J119B	LVR-IC	11.9V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J119D	-	R1190J119D	LVR-IC	11.9V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B1J120B	-	R1190J120B	LVR-IC	12.0V±1.5%, 1A, +CE	TO-252-5	69zv	VR7	10d	Ric
B1J120D	-	R1190J120D	LVR-IC	12.0V±1.5%, 1A, +CE, CL	TO-252-5	69zv	VR7	10d	Ric
B20100	-	MBRB20100CT	Si-diode	Dual, Schottky barrier rectifier, 100V, 10A, Vf<0.75V(10A)	D2-PAK	68bu	-	10a	Ons
B2060T	-	MBRB2060CT	Si-diode	Dual, Schottky barrier rectifier, 60V, 10A, Vf<0.75V(10A)	D2-PAK	68bu	-	10a	Ons
B320	-	MBRD320	Si-diode	Rectifier, 20V, 3A, Vf<0.6V(3A)	D-PAK	68dz	-	10a	Ons
B330	-	MBRD330	Si-diode	Rectifier, 30V, 3A, Vf<0.6V(3A)	D-PAK	68dz	-	10a	Ons
B340	-	MBRD340	Si-diode	Rectifier, 40V, 3A, Vf<0.6V(3A)	D-PAK	68dz	-	10a	Ons
B350	-	MBRD350	Si-diode	Rectifier, 50V, 3A, Vf<0.6V(3A)	D-PAK	68dz	-	10a	Ons
B360	-	MBRD360	Si-diode	Rectifier, 60V, 3A, Vf<0.6V(3A)	D-PAK	68dz	-	10a	Ons
B620T	-	MBRD620CT	Si-diode	Dual, Rectifier, 20V, 3A, Vf<0.7V(3A)	D-PAK	68bu	-	10a	Ons
B630T	-	MBRD630CT	Si-diode	Dual, Rectifier, 30V, 3A, Vf<0.7V(3A)	D-PAK	68bu	-	10a	Ons
B640T	-	MBRD640CT	Si-diode	Dual, Rectifier, 40V, 3A, Vf<0.7V(3A)	D-PAK	68bu	-	10a	Ons
B650T	-	MBRD650CT	Si-diode	Dual, Rectifier, 50V, 3A, Vf<0.7V(3A)	D-PAK	68bu	-	10a	Ons
B660T	-	MBRD660CT	Si-diode	Dual, Rectifier, 60V, 3A, Vf<0.7V(3A)	D-PAK	68bu	-	10a	Ons
B835L	-	MBRD835L	Si-diode	SBR, 35V, 8A, Vf<0.51V(8A)	D-PAK	68dz	-	10a	Ons
C1J030B	-	R1500J030B	LVR-IC	LDO, 3.0V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J031B	-	R1500J031B	LVR-IC	LDO, 3.1V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J032B	-	R1500J032B	LVR-IC	LDO, 3.2V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J033B	-	R1500J033B	LVR-IC	LDO, 3.3V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J034B	-	R1500J034B	LVR-IC	LDO, 3.4V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J035B	-	R1500J035B	LVR-IC	LDO, 3.5V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J036B	-	R1500J036B	LVR-IC	LDO, 3.6V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J037B	-	R1500J037B	LVR-IC	LDO, 3.7V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J038B	-	R1500J038B	LVR-IC	LDO, 3.8V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J039B	-	R1500J039B	LVR-IC	LDO, 3.9V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J040B	-	R1500J040B	LVR-IC	LDO, 4.0V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J041B	-	R1500J041B	LVR-IC	LDO, 4.1V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J042B	-	R1500J042B	LVR-IC	LDO, 4.2V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J043B	-	R1500J043B	LVR-IC	LDO, 4.3V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J044B	-	R1500J044B	LVR-IC	LDO, 4.4V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J045B	-	R1500J045B	LVR-IC	LDO, 4.5V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J046B	-	R1500J046B	LVR-IC	LDO, 4.6V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J047B	-	R1500J047B	LVR-IC	LDO, 4.7V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J048B	-	R1500J048B	LVR-IC	LDO, 4.8V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J049B	-	R1500J049B	LVR-IC	LDO, 4.9V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J050B	-	R1500J050B	LVR-IC	LDO, 5.0V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J051B	-	R1500J051B	LVR-IC	LDO, 5.1V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J052B	-	R1500J052B	LVR-IC	LDO, 5.2V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J053B	-	R1500J053B	LVR-IC	LDO, 5.3V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J054B	-	R1500J054B	LVR-IC	LDO, 5.4V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J055B	-	R1500J055B	LVR-IC	LDO, 5.5V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J056B	-	R1500J056B	LVR-IC	LDO, 5.6V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J057B	-	R1500J057B	LVR-IC	LDO, 5.7V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J058B	-	R1500J058B	LVR-IC	LDO, 5.8V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J059B	-	R1500J059B	LVR-IC	LDO, 5.9V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J060B	-	R1500J060B	LVR-IC	LDO, 6.0V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J061B	-	R1500J061B	LVR-IC	LDO, 6.1V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J062B	-	R1500J062B	LVR-IC	LDO, 6.2V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J063B	-	R1500J063B	LVR-IC	LDO, 6.3V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J064B	-	R1500J064B	LVR-IC	LDO, 6.4V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J065B	-	R1500J065B	LVR-IC	LDO, 6.5V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J066B	-	R1500J066B	LVR-IC	LDO, 6.6V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J067B	-	R1500J067B	LVR-IC	LDO, 6.7V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J068B	-	R1500J068B	LVR-IC	LDO, 6.8V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J069B	-	R1500J069B	LVR-IC	LDO, 6.9V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J070B	-	R1500J070B	LVR-IC	LDO, 7.0V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J071B	-	R1500J071B	LVR-IC	LDO, 7.1V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J072B	-	R1500J072B	LVR-IC	LDO, 7.2V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
C1J073B	-	R1500J073B	LVR-IC	LDO, 7.3V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J074B	-	R1500J074B	LVR-IC	LDO, 7.4V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J075B	-	R1500J075B	LVR-IC	LDO, 7.5V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J076B	-	R1500J076B	LVR-IC	LDO, 7.6V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J077B	-	R1500J077B	LVR-IC	LDO, 7.7V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J078B	-	R1500J078B	LVR-IC	LDO, 7.8V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J079B	-	R1500J079B	LVR-IC	LDO, 7.9V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J080B	-	R1500J080B	LVR-IC	LDO, 8.0V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J081B	-	R1500J081B	LVR-IC	LDO, 8.1V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J082B	-	R1500J082B	LVR-IC	LDO, 8.2V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J083B	-	R1500J083B	LVR-IC	LDO, 8.3V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J084B	-	R1500J084B	LVR-IC	LDO, 8.4V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J085B	-	R1500J085B	LVR-IC	LDO, 8.5V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J086B	-	R1500J086B	LVR-IC	LDO, 8.6V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J087B	-	R1500J087B	LVR-IC	LDO, 8.7V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J088B	-	R1500J088B	LVR-IC	LDO, 8.8V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J089B	-	R1500J089B	LVR-IC	LDO, 8.9V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J090B	-	R1500J090B	LVR-IC	LDO, 9.0V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J091B	-	R1500J091B	LVR-IC	LDO, 9.1V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J092B	-	R1500J092B	LVR-IC	LDO, 9.2V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J093B	-	R1500J093B	LVR-IC	LDO, 9.3V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J094B	-	R1500J094B	LVR-IC	LDO, 9.4V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J095B	-	R1500J095B	LVR-IC	LDO, 9.5V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J096B	-	R1500J096B	LVR-IC	LDO, 9.6V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J097B	-	R1500J097B	LVR-IC	LDO, 9.7V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J098B	-	R1500J098B	LVR-IC	LDO, 9.8V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J099B	-	R1500J099B	LVR-IC	LDO, 9.9V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J100B	-	R1500J100B	LVR-IC	LDO, 10.0V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J101B	-	R1500J101B	LVR-IC	LDO, 10.1V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J102B	-	R1500J102B	LVR-IC	LDO, 10.2V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J103B	-	R1500J103B	LVR-IC	LDO, 10.3V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J104B	-	R1500J104B	LVR-IC	LDO, 10.4V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J105B	-	R1500J105B	LVR-IC	LDO, 10.5V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J106B	-	R1500J106B	LVR-IC	LDO, 10.6V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J107B	-	R1500J107B	LVR-IC	LDO, 10.7V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J108B	-	R1500J108B	LVR-IC	LDO, 10.8V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J109B	-	R1500J109B	LVR-IC	LDO, 10.9V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J110B	-	R1500J110B	LVR-IC	LDO, 11.0V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J111B	-	R1500J111B	LVR-IC	LDO, 11.1V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J112B	-	R1500J112B	LVR-IC	LDO, 11.2V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J113B	-	R1500J113B	LVR-IC	LDO, 11.3V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J114B	-	R1500J114B	LVR-IC	LDO, 11.4V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J115B	-	R1500J115B	LVR-IC	LDO, 11.5V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J116B	-	R1500J116B	LVR-IC	LDO, 11.6V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J117B	-	R1500J117B	LVR-IC	LDO, 11.7V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J118B	-	R1500J118B	LVR-IC	LDO, 11.8V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J119B	-	R1500J119B	LVR-IC	LDO, 11.9V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
C1J120B	-	R1500J120B	LVR-IC	LDO, 12.0V±2%, 500mA, +CE	TO-252-5	69x2	VR4	10d	Ric
D03G60C	-	IDD03SG60C	SiC-diode	SBD, Sw, 600V, 3A, Vf<2.3V(3A), 60pF, 10ns	TO-252	68d2	-	10b	Inf
D04G60C	-	IDD04SG60C	SiC-diode	SBD, Sw, 600V, 4A, Vf<2.1V(4A), 80pF, 4.5ns	TO-252	68d2	-	10b	Inf
D04S60	-	SDD04S60	SiC-diode	Sw, 600V, 4A, Vf<1.7V(4A), 150pF, 13ns	TO-252	68d2	-	10b	Inf
D04S60C	-	IDD04S60C	SiC-diode	SBD, Sw, 600V, 4A, Vf<1.7V(4A), 130pF, 8ns	TO-252	68d2	-	10b	Inf
D05G60C	-	IDD05SG60C	SiC-diode	SBD, Sw, 600V, 5A, Vf<2.1V(7A), 110pF, 10ns	TO-252	68d2	-	10b	Inf
D06S60	-	SDB06S60	SiC-diode	Sw, 600V, 6A, Vf<1.7V(6A), 20pF, 15ns	D2-PAK	68d2	-	10b	Inf
D06S60C	-	IDB06S60C	SiC-diode	SBD, Sw, 600V, 6A, Vf<1.7V(6A), 35pF, 15ns	D2-PAK	68d2	-	10b	Inf
D10S60C	-	IDB10S60C	SiC-diode	SBD, Sw, 600V, 10A, Vf<1.7V(10A), 60pF, 24ns	D2-PAK	68d2	-	10b	Inf
D1J081B	-	RP131J081B	LVR-IC	LDO, 0.8V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J081D	-	RP131J081D	LVR-IC	LDO, 0.8V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J091B	-	RP131J091B	LVR-IC	LDO, 0.9V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J091D	-	RP131J091D	LVR-IC	LDO, 0.9V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J101B	-	RP131J101B	LVR-IC	LDO, 1.0V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J101B5	-	RP131J101B5	LVR-IC	LDO, 1.05V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J101D	-	RP131J101D	LVR-IC	LDO, 1.0V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J101D5	-	RP131J101D5	LVR-IC	LDO, 1.05V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J111B	-	RP131J111B	LVR-IC	LDO, 1.1V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J111D	-	RP131J111D	LVR-IC	LDO, 1.1V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J121B	-	RP131J121B	LVR-IC	LDO, 1.2V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J121B5	-	RP131J121B5	LVR-IC	LDO, 1.25V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J121D	-	RP131J121D	LVR-IC	LDO, 1.2V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J121D5	-	RP131J121D5	LVR-IC	LDO, 1.25V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1J131B	-	RP131J131B	LVR-IC	LDO, 1.3V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J131D	-	RP131J131D	LVR-IC	LDO, 1.3V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J141B	-	RP131J141B	LVR-IC	LDO, 1.4V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J141D	-	RP131J141D	LVR-IC	LDO, 1.4V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J151B	-	RP131J151B	LVR-IC	LDO, 1.5V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J151D	-	RP131J151D	LVR-IC	LDO, 1.5V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J161B	-	RP131J161B	LVR-IC	LDO, 1.6V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J161D	-	RP131J161D	LVR-IC	LDO, 1.6V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J171B	-	RP131J171B	LVR-IC	LDO, 1.7V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J171D	-	RP131J171D	LVR-IC	LDO, 1.7V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J181B	-	RP131J181B	LVR-IC	LDO, 1.8V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J181B5	-	RP131J181B5	LVR-IC	LDO, 1.85V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J181D	-	RP131J181D	LVR-IC	LDO, 1.8V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J181D5	-	RP131J181D5	LVR-IC	LDO, 1.85V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J191B	-	RP131J191B	LVR-IC	LDO, 1.9V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J191D	-	RP131J191D	LVR-IC	LDO, 1.9V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J201B	-	RP131J201B	LVR-IC	LDO, 2.0V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J201D	-	RP131J201D	LVR-IC	LDO, 2.0V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J211B	-	RP131J211B	LVR-IC	LDO, 2.1V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J211D	-	RP131J211D	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J221B	-	RP131J221B	LVR-IC	LDO, 2.2V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J221D	-	RP131J221D	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J231B	-	RP131J231B	LVR-IC	LDO, 2.3V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J231D	-	RP131J231D	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J241B	-	RP131J241B	LVR-IC	LDO, 2.4V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J241D	-	RP131J241D	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J251B	-	RP131J251B	LVR-IC	LDO, 2.5V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J251D	-	RP131J251D	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J261B	-	RP131J261B	LVR-IC	LDO, 2.6V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J261D	-	RP131J261D	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J271B	-	RP131J271B	LVR-IC	LDO, 2.7V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J271D	-	RP131J271D	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J281B	-	RP131J281B	LVR-IC	LDO, 2.8V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J281B5	-	RP131J281B5	LVR-IC	LDO, 2.85V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J281D	-	RP131J281D	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J281D5	-	RP131J281D5	LVR-IC	LDO, 2.85V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J291B	-	RP131J291B	LVR-IC	LDO, 2.9V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J291D	-	RP131J291D	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J301B	-	RP131J301B	LVR-IC	LDO, 3.0V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J301D	-	RP131J301D	LVR-IC	LDO, 3.0V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J311B	-	RP131J311B	LVR-IC	LDO, 3.1V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J311D	-	RP131J311D	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J321B	-	RP131J321B	LVR-IC	LDO, 3.2V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J321D	-	RP131J321D	LVR-IC	LDO, 3.2V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J331B	-	RP131J331B	LVR-IC	LDO, 3.3V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J331D	-	RP131J331D	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J341B	-	RP131J341B	LVR-IC	LDO, 3.4V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J341D	-	RP131J341D	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J351B	-	RP131J351B	LVR-IC	LDO, 3.5V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J351D	-	RP131J351D	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J361B	-	RP131J361B	LVR-IC	LDO, 3.6V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J361D	-	RP131J361D	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J371B	-	RP131J371B	LVR-IC	LDO, 3.7V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J371D	-	RP131J371D	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J381B	-	RP131J381B	LVR-IC	LDO, 3.8V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J381D	-	RP131J381D	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J391B	-	RP131J391B	LVR-IC	LDO, 3.9V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J391D	-	RP131J391D	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J401B	-	RP131J401B	LVR-IC	LDO, 4.0V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J401D	-	RP131J401D	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J411B	-	RP131J411B	LVR-IC	LDO, 4.1V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J411D	-	RP131J411D	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J421B	-	RP131J421B	LVR-IC	LDO, 4.2V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J421D	-	RP131J421D	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J431B	-	RP131J431B	LVR-IC	LDO, 4.3V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J431D	-	RP131J431D	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J441B	-	RP131J441B	LVR-IC	LDO, 4.4V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J441D	-	RP131J441D	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J451B	-	RP131J451B	LVR-IC	LDO, 4.5V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J451D	-	RP131J451D	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric



SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
D1J461B	-	RP131J461B	LVR-IC	LDO, 4.6V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J461D	-	RP131J461D	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J471B	-	RP131J471B	LVR-IC	LDO, 4.7V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J471D	-	RP131J471D	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J481B	-	RP131J481B	LVR-IC	LDO, 4.8V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J481D	-	RP131J481D	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J491B	-	RP131J491B	LVR-IC	LDO, 4.9V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J491D	-	RP131J491D	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J501B	-	RP131J501B	LVR-IC	LDO, 5.0V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J501D	-	RP131J501D	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J511B	-	RP131J511B	LVR-IC	LDO, 5.1V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J511D	-	RP131J511D	LVR-IC	LDO, 5.1V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J521B	-	RP131J521B	LVR-IC	LDO, 5.2V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J521D	-	RP131J521D	LVR-IC	LDO, 5.2V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J531B	-	RP131J531B	LVR-IC	LDO, 5.3V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J531D	-	RP131J531D	LVR-IC	LDO, 5.3V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J541B	-	RP131J541B	LVR-IC	LDO, 5.4V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J541D	-	RP131J541D	LVR-IC	LDO, 5.4V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
D1J551B	-	RP131J551B	LVR-IC	LDO, 5.5V±1%, 1A, +CE	TO-252-5	69x7	VR4	10d	Ric
D1J551D	-	RP131J551D	LVR-IC	LDO, 5.5V±1%, 1A, +CE, CL	TO-252-5	69x7	VR4	10d	Ric
E1J081B	-	RP108J081B	LVR-IC	LDO, 0.8V±15mV, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J081D	-	RP108J081D	LVR-IC	LDO, 0.8V±15mV, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J091B	-	RP108J091B	LVR-IC	LDO, 0.9V±15mV, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J091D	-	RP108J091D	LVR-IC	LDO, 0.9V±15mV, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J101B	-	RP108J101B	LVR-IC	LDO, 1.0V±15mV, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J101D	-	RP108J101D	LVR-IC	LDO, 1.0V±15mV, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J111B	-	RP108J111B	LVR-IC	LDO, 1.1V±15mV, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J111D	-	RP108J111D	LVR-IC	LDO, 1.1V±15mV, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J121B	-	RP108J121B	LVR-IC	LDO, 1.2V±15mV, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J121B5	-	RP108J121B5	LVR-IC	LDO, 1.25V±15mV, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J121D	-	RP108J121D	LVR-IC	LDO, 1.2V±15mV, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J121D5	-	RP108J121D5	LVR-IC	LDO, 1.25V±15mV, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J131B	-	RP108J131B	LVR-IC	LDO, 1.3V±15mV, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J131D	-	RP108J131D	LVR-IC	LDO, 1.3V±15mV, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J141B	-	RP108J141B	LVR-IC	LDO, 1.4V±15mV, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J141D	-	RP108J141D	LVR-IC	LDO, 1.4V±15mV, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J151B	-	RP108J151B	LVR-IC	LDO, 1.5V±15mV, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J151D	-	RP108J151D	LVR-IC	LDO, 1.5V±15mV, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J161B	-	RP108J161B	LVR-IC	LDO, 1.6V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J161D	-	RP108J161D	LVR-IC	LDO, 1.6V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J171B	-	RP108J171B	LVR-IC	LDO, 1.7V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J171D	-	RP108J171D	LVR-IC	LDO, 1.7V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J181B	-	RP108J181B	LVR-IC	LDO, 1.8V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J181B5	-	RP108J181B5	LVR-IC	LDO, 1.85V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J181D	-	RP108J181D	LVR-IC	LDO, 1.8V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J181D5	-	RP108J181D5	LVR-IC	LDO, 1.85V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J191B	-	RP108J191B	LVR-IC	LDO, 1.9V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J191D	-	RP108J191D	LVR-IC	LDO, 1.9V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J201B	-	RP108J201B	LVR-IC	LDO, 2.0V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J201D	-	RP108J201D	LVR-IC	LDO, 2.0V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J211B	-	RP108J211B	LVR-IC	LDO, 2.1V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J211D	-	RP108J211D	LVR-IC	LDO, 2.1V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J221B	-	RP108J221B	LVR-IC	LDO, 2.2V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J221D	-	RP108J221D	LVR-IC	LDO, 2.2V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J231B	-	RP108J231B	LVR-IC	LDO, 2.3V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J231D	-	RP108J231D	LVR-IC	LDO, 2.3V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J241B	-	RP108J241B	LVR-IC	LDO, 2.4V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J241D	-	RP108J241D	LVR-IC	LDO, 2.4V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J251B	-	RP108J251B	LVR-IC	LDO, 2.5V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J251D	-	RP108J251D	LVR-IC	LDO, 2.5V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J261B	-	RP108J261B	LVR-IC	LDO, 2.6V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J261D	-	RP108J261D	LVR-IC	LDO, 2.6V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J271B	-	RP108J271B	LVR-IC	LDO, 2.7V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J271D	-	RP108J271D	LVR-IC	LDO, 2.7V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J281B	-	RP108J281B	LVR-IC	LDO, 2.8V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J281B5	-	RP108J281B5	LVR-IC	LDO, 2.25V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J281D	-	RP108J281D	LVR-IC	LDO, 2.8V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J281D5	-	RP108J281D5	LVR-IC	LDO, 2.25V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J291B	-	RP108J291B	LVR-IC	LDO, 2.9V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J291D	-	RP108J291D	LVR-IC	LDO, 2.9V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
E1J301B	-	RP108J301B	LVR-IC	LDO, 3.0V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J301D	-	RP108J301D	LVR-IC	LDO, 3.0V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J311B	-	RP108J311B	LVR-IC	LDO, 3.1V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J311D	-	RP108J311D	LVR-IC	LDO, 3.1V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J321B	-	RP108J321B	LVR-IC	LDO, 3.2V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J321D	-	RP108J321D	LVR-IC	LDO, 3.2V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J331B	-	RP108J331B	LVR-IC	LDO, 3.3V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J331D	-	RP108J331D	LVR-IC	LDO, 3.3V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J341B	-	RP108J341B	LVR-IC	LDO, 3.4V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J341D	-	RP108J341D	LVR-IC	LDO, 3.4V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J351B	-	RP108J351B	LVR-IC	LDO, 3.5V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J351D	-	RP108J351D	LVR-IC	LDO, 3.5V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J361B	-	RP108J361B	LVR-IC	LDO, 3.6V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J361D	-	RP108J361D	LVR-IC	LDO, 3.6V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J371B	-	RP108J371B	LVR-IC	LDO, 3.7V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J371D	-	RP108J371D	LVR-IC	LDO, 3.7V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J381B	-	RP108J381B	LVR-IC	LDO, 3.8V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J381D	-	RP108J381D	LVR-IC	LDO, 3.8V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J391B	-	RP108J391B	LVR-IC	LDO, 3.9V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J391D	-	RP108J391D	LVR-IC	LDO, 3.9V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J401B	-	RP108J401B	LVR-IC	LDO, 4.0V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J401D	-	RP108J401D	LVR-IC	LDO, 4.0V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J411B	-	RP108J411B	LVR-IC	LDO, 4.1V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J411D	-	RP108J411D	LVR-IC	LDO, 4.1V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
E1J421B	-	RP108J421B	LVR-IC	LDO, 4.2V±1%, 3A, +CE	TO-252-5	69e1	VR5	10d	Ric
E1J421D	-	RP108J421D	LVR-IC	LDO, 4.2V±1%, 3A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G02N60	-	SGB02N60	IGBT	Fast Sw, 600V, 6A, 30W, 20/259ns	TO-263	68ib	-	10g	Inf
G1J001B	-	RP132J001B	LVR-IC	LDO, Adj. 0.8..5.5V±1%, 1A, +CE	TO-252-5	69e1	VR16	10d	Ric
G1J001D	-	RP132J001D	LVR-IC	LDO, Adj. 0.8..5.5V±1%, 1A, +CE, CL	TO-252-5	69e1	VR16	10d	Ric
G1J081B	-	RP132J081B	LVR-IC	LDO, 0.8V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J081D	-	RP132J081D	LVR-IC	LDO, 0.8V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J091B	-	RP132J091B	LVR-IC	LDO, 0.9V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J091D	-	RP132J091D	LVR-IC	LDO, 0.9V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J101B	-	RP132J101B	LVR-IC	LDO, 1.0V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J101D	-	RP132J101D	LVR-IC	LDO, 1.0V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J111B	-	RP132J111B	LVR-IC	LDO, 1.1V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J111D	-	RP132J111D	LVR-IC	LDO, 1.1V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J121B	-	RP132J121B	LVR-IC	LDO, 1.2V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J121B5	-	RP132J121B5	LVR-IC	LDO, 1.25V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J121D	-	RP132J121D	LVR-IC	LDO, 1.2V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J121D5	-	RP132J121D5	LVR-IC	LDO, 1.25V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J131B	-	RP132J131B	LVR-IC	LDO, 1.3V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J131D	-	RP132J131D	LVR-IC	LDO, 1.3V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J141B	-	RP132J141B	LVR-IC	LDO, 1.4V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J141D	-	RP132J141D	LVR-IC	LDO, 1.4V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J151B	-	RP132J151B	LVR-IC	LDO, 1.5V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J151D	-	RP132J151D	LVR-IC	LDO, 1.5V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J161B	-	RP132J161B	LVR-IC	LDO, 1.6V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J161D	-	RP132J161D	LVR-IC	LDO, 1.6V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J171B	-	RP132J171B	LVR-IC	LDO, 1.7V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J171D	-	RP132J171D	LVR-IC	LDO, 1.7V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J181B	-	RP132J181B	LVR-IC	LDO, 1.8V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J181B5	-	RP132J181B5	LVR-IC	LDO, 1.85V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J181D	-	RP132J181D	LVR-IC	LDO, 1.8V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J181D5	-	RP132J181D5	LVR-IC	LDO, 1.85V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J191B	-	RP132J191B	LVR-IC	LDO, 1.9V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J191D	-	RP132J191D	LVR-IC	LDO, 1.9V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J201B	-	RP132J201B	LVR-IC	LDO, 2.0V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J201D	-	RP132J201D	LVR-IC	LDO, 2.0V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J211B	-	RP132J211B	LVR-IC	LDO, 2.1V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J211D	-	RP132J211D	LVR-IC	LDO, 2.1V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J221B	-	RP132J221B	LVR-IC	LDO, 2.2V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J221D	-	RP132J221D	LVR-IC	LDO, 2.2V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J231B	-	RP132J231B	LVR-IC	LDO, 2.3V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J231D	-	RP132J231D	LVR-IC	LDO, 2.3V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J241B	-	RP132J241B	LVR-IC	LDO, 2.4V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J241D	-	RP132J241D	LVR-IC	LDO, 2.4V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J251B	-	RP132J251B	LVR-IC	LDO, 2.5V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J251D	-	RP132J251D	LVR-IC	LDO, 2.5V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J261B	-	RP132J261B	LVR-IC	LDO, 2.6V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric

SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
G1J261D	-	RP132J261D	LVR-IC	LDO, 2.6V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J271B	-	RP132J271B	LVR-IC	LDO, 2.7V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J271D	-	RP132J271D	LVR-IC	LDO, 2.7V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J281B	-	RP132J281B	LVR-IC	LDO, 2.8V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J281B5	-	RP132J281B5	LVR-IC	LDO, 2.85V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J281D	-	RP132J281D	LVR-IC	LDO, 2.8V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J281D5	-	RP132J281D5	LVR-IC	LDO, 2.85V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J291B	-	RP132J291B	LVR-IC	LDO, 2.9V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J291D	-	RP132J291D	LVR-IC	LDO, 2.9V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J301B	-	RP132J301B	LVR-IC	LDO, 3.0V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J301D	-	RP132J301D	LVR-IC	LDO, 3.0V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J311B	-	RP132J311B	LVR-IC	LDO, 3.1V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J311D	-	RP132J311D	LVR-IC	LDO, 3.1V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J321B	-	RP132J321B	LVR-IC	LDO, 3.2V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J321D	-	RP132J321D	LVR-IC	LDO, 3.2V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J331B	-	RP132J331B	LVR-IC	LDO, 3.3V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J331D	-	RP132J331D	LVR-IC	LDO, 3.3V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J341B	-	RP132J341B	LVR-IC	LDO, 3.4V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J341D	-	RP132J341D	LVR-IC	LDO, 3.4V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J351B	-	RP132J351B	LVR-IC	LDO, 3.5V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J351D	-	RP132J351D	LVR-IC	LDO, 3.5V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J361B	-	RP132J361B	LVR-IC	LDO, 3.6V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J361D	-	RP132J361D	LVR-IC	LDO, 3.6V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J371B	-	RP132J371B	LVR-IC	LDO, 3.7V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J371D	-	RP132J371D	LVR-IC	LDO, 3.7V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J381B	-	RP132J381B	LVR-IC	LDO, 3.8V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J381D	-	RP132J381D	LVR-IC	LDO, 3.8V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J391B	-	RP132J391B	LVR-IC	LDO, 3.9V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J391D	-	RP132J391D	LVR-IC	LDO, 3.9V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J401B	-	RP132J401B	LVR-IC	LDO, 4.0V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J401D	-	RP132J401D	LVR-IC	LDO, 4.0V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J411B	-	RP132J411B	LVR-IC	LDO, 4.1V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J411D	-	RP132J411D	LVR-IC	LDO, 4.1V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J421B	-	RP132J421B	LVR-IC	LDO, 4.2V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J421D	-	RP132J421D	LVR-IC	LDO, 4.2V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J431B	-	RP132J431B	LVR-IC	LDO, 4.3V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J431D	-	RP132J431D	LVR-IC	LDO, 4.3V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J441B	-	RP132J441B	LVR-IC	LDO, 4.4V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J441D	-	RP132J441D	LVR-IC	LDO, 4.4V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J451B	-	RP132J451B	LVR-IC	LDO, 4.5V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J451D	-	RP132J451D	LVR-IC	LDO, 4.5V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J461B	-	RP132J461B	LVR-IC	LDO, 4.6V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J461D	-	RP132J461D	LVR-IC	LDO, 4.6V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J471B	-	RP132J471B	LVR-IC	LDO, 4.7V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J471D	-	RP132J471D	LVR-IC	LDO, 4.7V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J481B	-	RP132J481B	LVR-IC	LDO, 4.8V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J481D	-	RP132J481D	LVR-IC	LDO, 4.8V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J491B	-	RP132J491B	LVR-IC	LDO, 4.9V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J491D	-	RP132J491D	LVR-IC	LDO, 4.9V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J501B	-	RP132J501B	LVR-IC	LDO, 5.0V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J501D	-	RP132J501D	LVR-IC	LDO, 5.0V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J511B	-	RP132J511B	LVR-IC	LDO, 5.1V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J511D	-	RP132J511D	LVR-IC	LDO, 5.1V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J521B	-	RP132J521B	LVR-IC	LDO, 5.2V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J521D	-	RP132J521D	LVR-IC	LDO, 5.2V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J531B	-	RP132J531B	LVR-IC	LDO, 5.3V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J531D	-	RP132J531D	LVR-IC	LDO, 5.3V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J541B	-	RP132J541B	LVR-IC	LDO, 5.4V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J541D	-	RP132J541D	LVR-IC	LDO, 5.4V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G1J551B	-	RP132J551B	LVR-IC	LDO, 5.5V±1%, 1A, +CE	TO-252-5	69e1	VR5	10d	Ric
G1J551D	-	RP132J551D	LVR-IC	LDO, 5.5V±1%, 1A, +CE, CL	TO-252-5	69e1	VR5	10d	Ric
G20H603	-	IGB20N60H3	IGBT	Sw, 600V, 20A, 170W, 16/194ns	TO-263	68ib	-	10g	Inf
H1J001C	-	R1511J001C	LVR-IC	LDO, Adjustable 3..12VV±1%, 300mA	TO-252-5	69c	VR5	10d	Ric
H1J030B	-	R1511J030B	LVR-IC	LDO, 3.0V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J031B	-	R1511J031B	LVR-IC	LDO, 3.1V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J032B	-	R1511J032B	LVR-IC	LDO, 3.2V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J033B	-	R1511J033B	LVR-IC	LDO, 3.3V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J034B	-	R1511J034B	LVR-IC	LDO, 3.4V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J035B	-	R1511J035B	LVR-IC	LDO, 3.5V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J036B	-	R1511J036B	LVR-IC	LDO, 3.6V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric





SMD code	A	Type	Function	Short description	Case	Pin	Sch	St	Mnf
H1J037B	-	R1511J037B	LVR-IC	LDO, 3.7V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J038B	-	R1511J038B	LVR-IC	LDO, 3.8V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J039B	-	R1511J039B	LVR-IC	LDO, 3.9V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J040B	-	R1511J040B	LVR-IC	LDO, 4.0V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J041B	-	R1511J041B	LVR-IC	LDO, 4.1V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J042B	-	R1511J042B	LVR-IC	LDO, 4.2V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J043B	-	R1511J043B	LVR-IC	LDO, 4.3V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J044B	-	R1511J044B	LVR-IC	LDO, 4.4V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J045B	-	R1511J045B	LVR-IC	LDO, 4.5V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J046B	-	R1511J046B	LVR-IC	LDO, 4.6V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J047B	-	R1511J047B	LVR-IC	LDO, 4.7V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J048B	-	R1511J048B	LVR-IC	LDO, 4.8V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J049B	-	R1511J049B	LVR-IC	LDO, 4.9V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J050B	-	R1511J050B	LVR-IC	LDO, 5.0V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J051B	-	R1511J051B	LVR-IC	LDO, 5.1V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J052B	-	R1511J052B	LVR-IC	LDO, 5.2V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J053B	-	R1511J053B	LVR-IC	LDO, 5.3V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J054B	-	R1511J054B	LVR-IC	LDO, 5.4V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J055B	-	R1511J055B	LVR-IC	LDO, 5.5V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J056B	-	R1511J056B	LVR-IC	LDO, 5.6V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J057B	-	R1511J057B	LVR-IC	LDO, 5.7V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J058B	-	R1511J058B	LVR-IC	LDO, 5.8V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J059B	-	R1511J059B	LVR-IC	LDO, 5.9V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J060B	-	R1511J060B	LVR-IC	LDO, 6.0V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J061B	-	R1511J061B	LVR-IC	LDO, 6.1V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J062B	-	R1511J062B	LVR-IC	LDO, 6.2V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J063B	-	R1511J063B	LVR-IC	LDO, 6.3V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J064B	-	R1511J064B	LVR-IC	LDO, 6.4V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J065B	-	R1511J065B	LVR-IC	LDO, 6.5V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J066B	-	R1511J066B	LVR-IC	LDO, 6.6V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J067B	-	R1511J067B	LVR-IC	LDO, 6.7V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J068B	-	R1511J068B	LVR-IC	LDO, 6.8V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J069B	-	R1511J069B	LVR-IC	LDO, 6.9V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J070B	-	R1511J070B	LVR-IC	LDO, 7.0V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J071B	-	R1511J071B	LVR-IC	LDO, 7.1V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J072B	-	R1511J072B	LVR-IC	LDO, 7.2V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J073B	-	R1511J073B	LVR-IC	LDO, 7.3V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J074B	-	R1511J074B	LVR-IC	LDO, 7.4V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J075B	-	R1511J075B	LVR-IC	LDO, 7.5V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J076B	-	R1511J076B	LVR-IC	LDO, 7.6V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J077B	-	R1511J077B	LVR-IC	LDO, 7.7V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J078B	-	R1511J078B	LVR-IC	LDO, 7.8V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J079B	-	R1511J079B	LVR-IC	LDO, 7.9V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J080B	-	R1511J080B	LVR-IC	LDO, 8.0V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J081B	-	R1511J081B	LVR-IC	LDO, 8.1V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J082B	-	R1511J082B	LVR-IC	LDO, 8.2V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J083B	-	R1511J083B	LVR-IC	LDO, 8.3V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J084B	-	R1511J084B	LVR-IC	LDO, 8.4V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J085B	-	R1511J085B	LVR-IC	LDO, 8.5V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J086B	-	R1511J086B	LVR-IC	LDO, 8.6V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J087B	-	R1511J087B	LVR-IC	LDO, 8.7V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J088B	-	R1511J088B	LVR-IC	LDO, 8.8V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J089B	-	R1511J089B	LVR-IC	LDO, 8.9V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
H1J090B	-	R1511J090B	LVR-IC	LDO, 9.0V±1%, 300mA, +CE	TO-252-5	69x2	VR4	10d	Ric
K15N60	-	SKB15N60	IGBT+Di	Sw, 600V, 15A, 139W, 31/261ns	TO-263	68ib	-	10b	Inf
K20T60	-	IKB20N60T	IGBT+Di	Sw, 600V, 20A, 166W, 18/199ns	TO-263	68ib	-	10b	Inf
T200	-	CHT200PPT	Si-npn	AF, Sw, 25V, 5A, B=45..180, 65MHz	D-PAK	68tb	-	10a	Chm
T210P	-	CHT210PPT	Si-pnp	AF, Sw, 30V, 5A, B=45..180, 120MHz	D-PAK	68tb	-	10a	Chm

SECTION 12

Conventional case drawings. Pin assignment



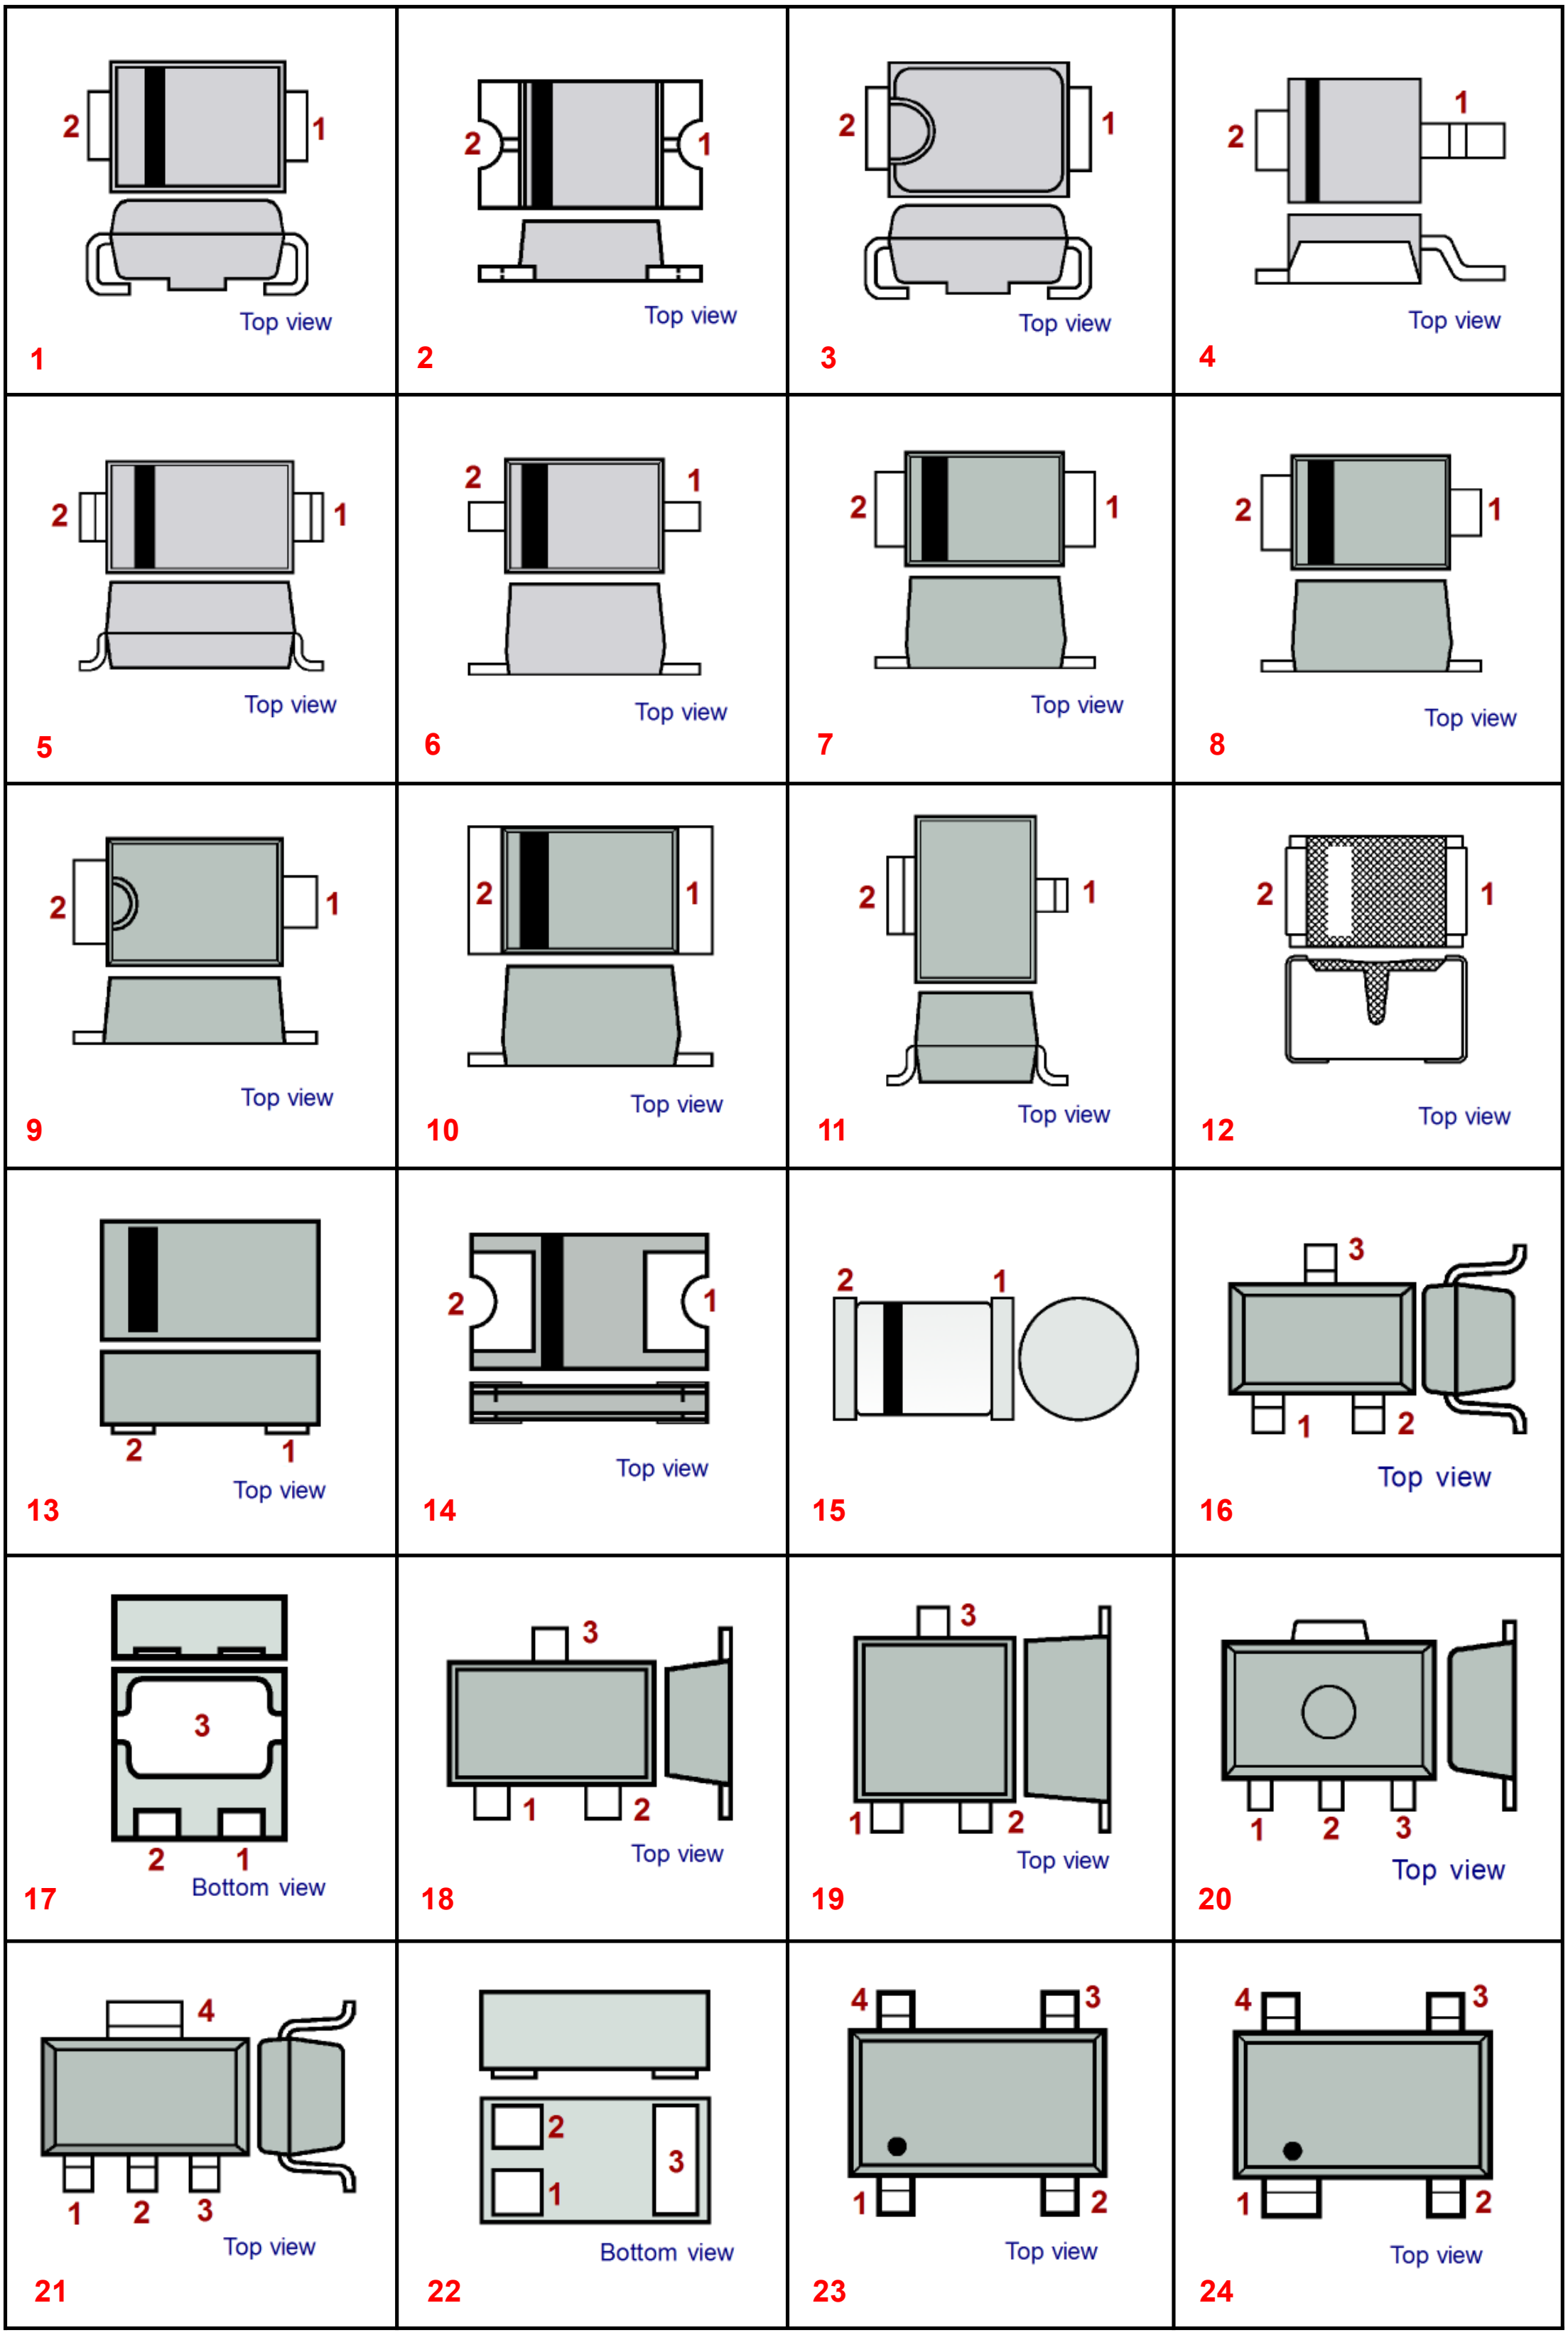
2 1 Top view 1
2 1 Top view 2
2 1 Top view 3
2 1 Top view 4
2 1 Top view 5
2 1 Top view 6
2 1 Top view 7
2 1 Top view 8
2 1 Top view 9
2 1 Top view 10
2 1 Top view 11
2 1 Top view 12
2 1 Top view 13
2 1 Top view 14
2 1 15
3 1 2 Top view 16
3 2 1 Bottom view 17
3 1 2 Top view 18
3 1 2 Top view 19
1 2 3 Top view 20
4 1 2 3 Top view 21
2 3 1 Bottom view 22
4 3 1 2 Top view 23
4 3 1 2 Top view 24



Top view

25



Top view

26



Top view

27



Top view

28



Top view

29



Top view

30



Bottom view

31



Top view

32



Top view

33



Top view

34



Top view

35



Bottom view

36



Bottom view

37



Bottom view

38



Bottom view

39



Bottom view

40



Top view

41



Top view

42



Top view

43



Top view

44



Bottom view

45



Bottom view

46



Top view

47



Bottom view

48
A48



49



50



51



52



53



54



55



56



57



58



59



60



61



62



63



64



65



66



67



68



69
111



70



71



72



73



74



75



76



77



78



79



80



81



82



83



84



85



86



87



88



89



90



91



92



93



107



108



110

SECTION 13
Pinout (table)

	PIN 1	PIN2	PIN3	PIN4	PIN5	PIN6	PIN7	PIN8	
a0	GND	Output	Vcc	+Input	-Input	-	-	-	
a1	GND	GND	Input	GND	GND	Vcc/Out	-	-	
a2	N/C	Anode	Cathode	N/C	Adjust	-	-	-	
a3	CE	GND	Vinput	Voutput	Adjust	N/C	-	-	
a4	CE	Vinput	Voutput	Switch	GND	Feedb.	-	-	
a5	No data	See dsc.	-	-	-	-	-	-	
a6	See sch	See dsc.	-	-	-	-	-	-	
a7	CE	GND	SSC	Vinput	Voutput	-	-	-	
a8	Test	GND	Tdet	N/C	Vcc	-	-	-	
a9	Tdet	GND	Test	Vcc	-	-	-	-	
aa	Input	GND	Vcc/Output	GND	-	-	-	-	
aa*	A1=CE/MODE	A3=Vout	Lx	C1=Vinput	C3=GND	-	-	-	
ab	Input	GND	GND	Output	GND	Vcc	-	-	
ab*	A1=CE/MODE	A3=Feedb.	Lx	C1=Vinput	C3=GND	-	-	-	
ac	Vcc	GND	Input	GND	GND	Output	GND	GND	
ad	Input	GND	Vcc	Output	GND	-	-	-	
ae	Input	Vcc	GND	Output	GND	GND	-	-	
af	N/C	Vinput	N/C	GND	N/C	Vout	N/C	N/C	
ag	Contact	Contact	N/C	-	-	-	-	-	
ah	Emitter	Emitter	Base	Emitter	Emitter	Collector	-	-	
ai	GND	Vcc	Input	Output	-	-	-	-	
aj	GND	Vcc/Vout	GND	Input	-	-	-	-	
ak	N/C	Cathode	Anode	-	-	-	-	-	
am	Vcc/Output	GND	Input	GND	-	-	-	-	
an	Output	GND	Input	Vcc	GND	-	-	-	
ao	Cath.(Anode)	N/C	Cath.(Anode)	Anode(Cath.)		-	-	-	-
ap	Cathode	N/C	Cathode	Anode	-	-	-	-	
aq	Contact	N/C	Contact	-	-	-	-	-	
ar	Contact	Contact	-	-	-	-	-	-	
as	Emitter	Emitter	N/C	Base	Collector	Collector	Collector	Collector	
at	Cathode	Gate	Anode	-	-	-	-	-	
au	CE	SS	Voutput	Vinput	GND	Vbias	-	-	
av	Vbias	GND	Vinput	Voutput	SS	CE	-	-	
a w	CE	Ilim	Voutput	Vinput	GND	Vbias	-	-	
ax	Vbias	GND	Vinput	Voutput	Ilim	CE	-	-	
ba	An/Cath.	An/Cath.	-	-	-	-	-	-	
ba*	A1=GND	A2=Vout	B1=CE	B2=Vin	-	-	-	-	
bb	Cathode1	Cathode2	Cathode3	Anode3	Anode2	Anode1	-	-	
bc*	A1=Vinput	A2=Voutput	B1=CE	B2=GND	-	-	-	-	
bd	Cathode	Cathode	Anode	-	-	-	-	-	
bd*	A1=GND	Vcc	Reset	MR	-	-	-	-	
be*	A1=CE	A3=Cb	B2=GND	C1=Voutput	C3=Vinput	-	-	-	
bf*	A1=Out L	A2=GND	A3=Out R	B1=In L	B3=In R	C1=Shutdwn	C2=Vcc	C3=Cext	
bg	Cathode1	Cathode2	Anode2	N/C	Anode1	-	-	-	
bg*	A1=GND	A2=CE	B1=Voutput	B2=Vinput	-	-	-	-	
bh	Anode1	Common Cath.		Anode2	Anode3	Anode4	-	-	-
bh*	A1=GND	A3=CE	B2=Cb	C1=Voutput	C3=Vinput	-	-	-	
bi	Anode	Cathode	Anode	Anode	Cathode	Anode	-	-	
bm1	N/C	Cout	Dout	GND	V+	V-	-	-	
bm2	V-	V+	GND	Dout	Cout	-	-	-	
bn	OVP	Vinput	CE	A GND	N/C	Feedback	Switch.	P GND	
bp	Cathode	Cathode	Anode	Anode	Cathode	Cathode	-	-	
bq	GND	Voutput	Lx	-	-	-	-	-	
br	GND	Voutput	Ext	-	-	-	-	-	
bs	Anode1	Com. Cath.	Anode2	Com. Cath.	-	-	-	-	
bt	Cathode1	N/C	Cathode2	Com Anode	-	-	-	-	
bu	Anode1	N/C	Anode2	Com Cath.	-	-	-	-	
bv	Anode1	N/C	Cathode2	Cath.1/An2	-	-	-	-	
b w	Anode1	Com Cath.	Anode2	Anode3	Com Cath.	Anode4	-	-	
bx	Anode1	Cath.1/An2	Cathode2	Cathode3	An3/Cath.4	Anode4	-	-	
by	Cathode1	An1/Cath.2	Anode2	Cathode3	An3/Cath.4	Anode4	-	-	
bz	Cathode	Anode	Cathode	-	-	-	-	-	

	PIN 1	PIN2	PIN3	PIN4	PIN5	PIN6	PIN7	PIN8
c	Vinput	GND	GND	Adjust	Voutput	-	-	-
c1	CE	Vinput	N/C	GND	Lx	-	-	-
c2	Sense	Vinput	N/C	GND	Lx	-	-	-
c3	N/C	Voutput	CE	Ext	GND	-	-	-
c4	N/C	Vinput	Voutput	Ext	GND	-	-	-
c5	Voutput	GND	Vinput	N/C	N/C	-	-	-
c6	Voutput	Vinput	GND	N/C	N/C	-Shutdwn	N/C	N/C
c7	Vinput	GND	-Shutdwn	-Error	Voutput	-	-	-
c8	Voutput	GND	CE	ECO	Vinput	-	-	-
c9	ECO	N/C	Vinput	Voutput	GND	CE	-	-
ca	ECO	GND	CE	Voutput	Vinput	-	-	-
cb	Vcc	Shutdwn	In L	Out L	GND	Out R	In R	Cext
cc	Reset	MR	GND	Vcc	-	-	-	-
cd	Ca1/An2/Ca3	Cathode2	Anode3	Anode1	-	-	-	-
ce	Cathode1	Cathode2	Anode2	Anode1	-	-	-	-
cf	GND	Vinput	Vinput	Vinput	Voutput	Voutput	Voutput	N/C
cg	GND	Voutput	Vinput	-	-	-	-	-
ch	Voutput	GND	Vinput	-	-	-	-	-
cj	Voutput	Vinput	GND	-	-	-	-	-
ck	Voutput	Adjust	Vinput	-	-	-	-	-
cm	Adjust	Vinput	Voutput	-	-	-	-	-
cn	Adjust	Voutput	Vinput	-	-	-	-	-
co	Reset	MR	Vcc	GND	-	-	-	-
cp	Reset	GND	MR	WD	Vcc	-	-	-
cq	Reset	GND	MR1	Vcc	MR2	-	-	-
cr	Vcc	GND	MR	Reset	-	-	-	-
cs	Anode1	Cathode1	Anode2	Cathode2	-	-	-	-
ct	Anode1	Cathode1	Cathode2	Anode2	-	-	-	-
cu	Vinput	GND	CE	Shutdown	Voutput	-	-	-
cv	Voutput	Shutdown	CE	Vinput	-	-	-	-
c w	Shutdown	GND	CE	Vinput	Voutput	-	-	-
cx	Vinput	GND	CE	N/C	Voutput	-	-	-
cy	Adjust	Vinput	Voutput	Vinput	-	-	-	-
cz	Cathode1	Com. An	Cathode2	-	-	-	-	-
d	Anode	Cathode	-	-	-	-	-	-
d1	Anode1	Com.Cath.	Anode2	N/C	-	-	-	-
d2	N/C	N/C	Anode	Cathode	-	-	-	-
d3	CE	GND	Vinput	Voutput	N/C	Adjust	-	-
d4	CE	GND	Vinput	Voutput	N/C	Error	-	-
da	Lx	GND	Feedback	CE/MODE	GND	Vinput	-	-
db	GND	Lx	N/C	Feedback	GND	CE	N/C	Vinput
dc	Anode	N/C	Cathode	-	-	-	-	-
dc0	Lx	GND	Voutput	CE	GND	Vinput	L1	L2
dc1	Voutput2	Vinput	Voutput1	Lx	GND	Vinput	-	-
dc2	Lx	GND	Voutput1	Vdout	Voutput2	Vinput	-	-
dc3	Lx	GND	Mode	CE	Voutput	Vinput	-	-
dc4	Vinput	GND	CE/MODE	Voutput	Lx	-	-	-
dc5	Lx	GND	Voutput	CE/MODE	GND	Vinput	-	-
dc6	Feedback	Switching	GND	Vinput	N/C	CE	-	-
dc7	Lx	GND	Voutput	CE/MODE	GND	Vinput	L1	L2
dc8	GND	Vinput	Ext	Voutput	CE	-	-	-
dc9	GND	Lx	N/C	Voutput	GND	CE	N/C	Vinput
dd	Anode1	Anode2	Anode3	Cathode3	Cathode2	Cathode1	-	-
de	Anode1	N/C	Cathode2	Anode2	N/C	Cathode1	-	-
df	Cathode1	Cathode2	Com. Anode	-	-	-	-	-
dg	Anode1	Anode2	Com. Cath.	-	-	-	-	-
dh	Anode	Anode	Cathode	-	-	-	-	-
di	Anode	Cathode	N/C	-	-	-	-	-
dj	Anode1	Cat1/An2	Cathode2	-	-	-	-	-
dk	Cathode	Anode	N/C	-	-	-	-	-
dl	Anode1	Cathode2	Cat1/An2	-	-	-	-	-
dm	Anode	Cathode	Anode	-	-	-	-	-

	PIN 1	PIN2	PIN3	PIN4	PIN5	PIN6	PIN7	PIN8
dn	N/C	Anode1	Cathode1	N/C	Anode2	Cathode2	-	-
do	Cath1/Cath2	Anode3	An2/Cath3	Anode1	-	-	-	-
dp	An/Cath.	An/Cath.	An/Cath.	-	-	-	-	-
dq	Anode	N/C	Cathode	N/C	N/C	-	-	-
dr	N/C	Anode	Cathode	-	-	-	-	-
ds	Anode1	N/C	Anode2	Cathode2	Cathode1	-	-	-
du	Adjust	Cathode	Anode	-	-	-	-	-
dv	Anode1	Anode2	Cathode2	Cathode1	-	-	-	-
d w	Anode1	N/C	Anode2	Cathode2	N/C	Cathode1	-	-
dy	Cat1(An1)	Cat2(An2)	Cat3(An3)	Cat3(An3)	Cat2(An2)	Cat1(An1)	-	-
dz	Anode	N/C	Anode	Cathode	-	-	-	-
e	Adjust	Voutput	Vinput	GND	CE	-	-	-
e0	CE2	GND	Vinput	Voutput1	Voutput2	CE1	-	-
e1	CE	Vinput	GND	Voutput	Set	-	-	-
e2	Mode	CE	AVin	PVin	Lx	AGND	PGND	Voutput
e3	Mode	CE	AVin	PVin	Lx	AGND	PGND	Feedback
e4	CE	Mode	Vinput	Lx	GND	Voutput	-	-
e5	Vinput	Mode	CE	Voutput	GND	Lx	-	-
e6	Voutput	Feedback	GND	CE	N/C	Vinput	-	-
e7	Voutput	Feedback	GND	CE	Cd	Vinput	-	-
e8	Vinput	GND	CE	Track	Voutput	-	-	-
e9	Vinput	GND	Cd	CE2	CE1	N/C	Voutput2	Voutput1
ea	Cathode1	Anode2	An1/Cath2	-	-	-	-	-
eb	Cathode	N/C	Anode	-	-	-	-	-
ec	Anode1	Anode2	Anode3	Com.Cath.	Com.Cath.	Com.Cath.	-	-
ed	N/C	An1/An2	N/C	Cathode1	N/C	Cathode2	-	-
ee	CE	GND	Vinput	Lx	GND	Voutput	-	-
ef	Cathode1	Anode2	Cathode2	Anode1	-	-	-	-
eh	HV Flag	GND	Vcc	Reset	MR	-	-	-
ei	Vinput	GND	CE	Flag	Voutput	-	-	-
ej	Vinput	PGND	Feedback	CE	Vout/Feed.	Mode	AGND	Lx
ek	Reset	GND	MR	Reset In	Vcc	-	-	-
el	PGND	Vinput	Feedback	CE	Vout/Feed,	Test	AGND	Lx
em	Reset	GND	Reset In	OVR In	Vcc	-	-	-
en	N/C	Anode	Cathode	Cathode	-	-	-	-
ep	Voutput	N/C	GND	CE	N/C	Vinput	-	-
eq	Voutput	Voutput	N/C	N/C	GND	CE	Vinput	Vinput
er	Voutput	GND	N/C	CE	N/C	Vinput	-	-
es	Voutput	GND	Cd	CE	Vinput	-	-	-
et	Voutput	GND	Cd	CE	GND	Vinput	-	-
eu	Vinput	GND	Voutput	-	-	-	-	-
ev	Vinput	GND	Voutput	N/C	Vinput	N/C	-	-
e w	GND	Vinput	CE	N/C	Voutput	-	-	-
ex	N/C	Vinput	CE	GND	Voutput	-	-	-
ey	Voutput	N/C	Vinput	CE	N/C	GND	-	-
ez	Voutput	N/C	Vinput	N/C	N/C	GND	-	-
f1	Gate1	Gate2	Drain	Source	-	-	-	-
f2	Gate	Drain	Source	Drain	-	-	-	-
f3	Drain	Source	Gate	Source	-	-	-	-
f4	Gate1	Source2	Gate2	Drain2	Source1	Drain1	-	-
fa	Source	Drain	Gate	-	-	-	-	-
fc	Drain	Drain	Gate	Source	Drain	Drain	-	-
fd	Source	Drain	Gate1	Gate2	-	-	-	-
fe	Source1	Source2	Gate2	Drain2	Gate1	Drain1	-	-
fg	Source	Gate	Drain	-	-	-	-	-
fh	Gate	Source	Drain	-	-	-	-	-
fi	Gate	Drain	Source	-	-	-	-	-
fj	Drain	Source	Gate	-	-	-	-	-
fk	Drain	Gate	Source	-	-	-	-	-
fm	Drain	Source	Gate1	Gate2	-	-	-	-
fn	Drain	Source	Gate	N/C	-	-	-	-
fo	Source1	Gate1	Source2	Gate2	Drain2	Drain2	Drain1	Drain1

	PIN 1	PIN2	PIN3	PIN4	PIN5	PIN6	PIN7	PIN8
fp	Source	Drain	Source	Gate	-	-	-	-
fq	Gate	Source	Drain	Surse	-	-	-	-
fr	N/C	Source	Source	Gate	Drain	Drain	Drain	Drain
fs	Source	Source	Source	Gate	Drain	Drain	Drain	Drain
ft	Gate	Prot. Diod	Source	Drain	-	-	-	-
f w	Gate	N/C	Source	Drain	-	-	-	-
fx	SUB	Source	Drain	Gate	-	-	-	-
g	N/C	Vinput	N/C	GND	Voutput	-	-	-
g0	Vinput	GND	CE2	CE1	Voutput2	Voutput1	-	-
g1	Cd	GND	Vinput	Voutput1	Voutput2	CE	-	-
g2	Vinput	GND	Cd	CE	Voutput2	Voutput1	-	-
g3	Vinput	GND	N/C	CE2	CE1	N/C	Vout2	Vout1
g5	Voutput1	Voutput2	CE2	CE1	GND	Vinput	-	-
g6	Voutput	Vinput	CE	GND	-	-	-	-
g7	CE	GND	Vbat	Voutput	Lx	-	-	-
g8	Lx	Voutput	Vbat	CE	N/C	GND	-	-
g9	Reset	GND	WDEN	WD	Vcc	-	-	-
ga	Vinput	N/C	N/C	Lx	N/C	GND	-	-
gb	N/C	Voutput	CE	Lx	GND	-	-	-
gc	N/C	Vinput	Voutput	Lx	GND	-	-	-
gd	Voutput	N/C	CE	Lx	N/C	GND	-	-
ge	Vinput	N/C	Voutput	Lx	N/C	GND	-	-
gf	N/C	Voutput	Vinput	GND	CE	-	-	-
gg	Voutput	N/C	CE	Ext	N/C	GND	-	-
gh	Vinput	GND	Cd	Reset	-	-	-	-
gi	Voutput	GND	Lx	Vinput	GND	CE	-	-
gj	Vinput	Vbias	GND	CE	Voutput	-	-	-
gk	CE	Vbias	GND	Vinput	Voutput	-	-	-
gm	Vbias	GND	Vinput	Voutput	N/C	CE	-	-
gn	Vinput	CE	GND	Lx	N/C	Voutput	-	-
go	Vinput	N/C	Voutput	Ext	N/C	GND	-	-
gp	Vinput	N/C	GND	Lx	N/C	Voutput	-	-
gq	Voutput	GND	Lx	Vinput	CE	-	-	-
gr	CE1	GND1	Vinput1	Voutput1	Voutput2	GND2	CE2	Vinput2
gs	N/C	GND1	Vinput1	Voutput1	Voutput2	GND2	CE2	Vinput2
gt	CE1	GND1	Vinput1	Voutput1	Voutput2	GND2	N/C	Vinput2
gu	N/C	GND1	Vinput1	Voutput1	Voutput2	GND2	N/C	Vinput2
gv	WD	WDEN	N/C	Reset	GND	Vinput		
g w	Vinput	GND	Voutput	N/C	CE	-	-	-
gx	Sense	CE	Vinput	GND	PGND	C1-	C1+	Voutput
gy	Vinput	Voutput	N/C	Cd	CE	GND	-	-
h1	CE	Vinput	GND	Voutput	GND	GND	-	-
h2	CE	Vinput	GND	Voutput	Adjust	GND	-	-
h4	CE	GND	Adjust	Vinput	Voutput	-	-	-
h5	Voutput	N/C	Adjust	GND	CE	N/C	N/C	Vinput
h6	Voutput	N/C	N/C	GND	CE	N/C	N/C	Vinput
ha	Vcc	Output	GND	-	-	-	-	-
hb	Vcc	GND	T1 Input	CLK	DATA	INT/Output	-	-
hc	Vcc	GND	T1 Input	CLK	DATA	N/C	-	-
hd	N/C	GND	Vcc	SCLK	SDA	-	-	-
hf	GND	GND	Hysteresis	Vcc	Tunder	-	-	-
hg	Vinput	GND	CE	Reset	Voutput	-	-	-
hh	Vinput	GND	Sense	Reset	Voutput	-	-	-
hj	Vinput	GND	N/C	Reset	Voutput	-	-	-
hk	Vinput	GND	Voutput	Reset	CE	-	-	-
hl	Vinput	GND	Voutput	Reset	Sense	-	-	-
hm	Vinput	GND	Voutput	Reset	N/C	-	-	-
hn	Vinput	GND	Voutput	GND	-	-	-	-
ho	Vinput	+CE	-CE	N/C	Vadj	GND	Base	Voutput
hp	CE	N/C	GND	Voutput	N/C	Vinput	-	-
hq	Vinput	N/C	Voutput	N/C	GND	CE	-	-
hr	CE	N/C	Vinput	GND	Voutput	N/C	-	-

	PIN 1	PIN2	PIN3	PIN4	PIN5	PIN6	PIN7	PIN8
hs	Vinput	N/C	Voutput	N/C	GND	N/C	-	-
ht	AE(Mode)	GND	CE	Vinput	N/C	Voutput	-	-
hu	Voutput	N/C	CE	N/C	GND	Vinput	-	-
h w	Vinput	GND	N/C	CE	Voutput	-	-	-
hx	GND	Reset	Cd	Vcc	-	-	-	-
hy	Vinput	CE	Voutput	GND	-	-	-	-
hz	Main1	Main2	Gate	Main2	-	-	-	-
ia	Gate	Collector	Emitter	-	-	-	-	-
ib	Gate	N/C	Emitter	Collector	-	-	-	-
la	+Vcc	GND	Output	Trigger	THR	-	-	-
lb	T/T	GND	CE	Vcc	Output	-	-	-
lc	Voutput	Vinput	CE	A GND	N/C	Feedback	Switch.	P GND
ld	In/Out	GND	In/Out	Ctrl	GND	Vcc	-	-
le	CE	OVP	Switching	Feedback	GND	Vinput	-	-
lf	CE	OVP	Vinput	Switching	GND	Feedback	-	-
ma	Reset	GND	MR	PFI	-PFO	Vcc	-	-
mb	Reset/Vcc	GND	MR	Sense	-Reset/Sns	Vcc	-	-
mc	Reset	GND	MR	Sense	WD	Vcc	-	-
md	Reset	N/C	Sense	Vcc	-	-	-	-
me	Reset	Cd	Sense	Vcc	-	-	-	-
mf	Reset	GND	Vcc	Sense	N/C	-	-	-
mg	Reset	GND	Vcc	Sense	Cd	-	-	-
opa	Output	-Vcc(GND)	+Input	-Input	+Vcc	-	-	-
opb	Output	+Vcc	+Input	-Input	-Vcc	-	-	-
opc	Output	-Vcc	+Input	-Input	+Vcc	Disable	-	-
opd	Output A	-Input A	+Input A	-Vcc	+Input B	-Input B	Output B	+Vcc
ope	Offset	-Input	+Input	-Vcc	Offset	Output	+Vcc	N/C
opf	+Input	-Vcc	-Input	Output	+Vcc	-	-	-
opg	N/C	-Input	+Input	-Vcc	N/C	Output	+Vcc	N/C
rb	Reference	Anode	Cathode	-	-	-	-	-
rc	Cathode	Reference	Anode	-	-	-	-	-
rd	Reference	Cathode	Anode	-	-	-	-	-
re	N/C	N/C	Cathode	Reference	Anode	-	-	-
rf	N/C	Anode	Cathode	Reference	Anode	-	-	-
rg	Voutput1	Vinput	Voutput2	CE2	GND	CE1	-	-
rh	Voutput2	Vinput	Voutput1	GND	CE1	CE2	-	-
ri	Voutput2	Vinput	Voutput1	CE1	GND	CE2	-	-
rj	Reset	Cd	GND	Vcc	-	-	-	-
rk	Reset	GND	Vcc	Vreset	N/C	-	-	-
rm	Reset	GND	Vcc	Vreset	Cd	-	-	-
rn	Reset	N/C	Vreset	Vcc	PAD=GND	-	-	-
ro	Reset	Cd	Vreset	Vcc	PAD=GND	-	-	-
rp	Vcc	GND	Cd	Reset	-	-	-	-
rq	Reset	Sense	GND	Vcc	-	-	-	-
rr	Reset	Vcc	GND	N/C	Sense	-	-	-
rs	Vcc	N/C	GND	Sense	Reset	-	-	-
rt	N/C	Cathode	Anode	Cathode	-	-	-	-
ru	Reset	N/C	Vcc	N/C	GND	-	-	-
rv	Vcc	N/C	GND	Cd	Reset	-	-	-
r w	Voutput	Vinput	GND	N/C	-	-	-	-
rx	N/C	Vinput	Voutput	GND	Vinput	CE	-	-
rz	Voutput	Vinput	GND	CE	N/C	-	-	-
s0	Vinput	GND	CE	Feedback	Voutput	-	-	-
s1	Voutput	Voutput	LCON	Feedback	GND	CE	Vinput	Vinput
s2	Vinput	N/C	Voutput	GND	N/C	CE	-	-
s3	PGND	AGND	Voutput	CE	Lx	Vinput	-	-
s4	Vinput	GND	CE/MODE	Feedback	Lx	-	-	-
s5	Voutput	N/C	N/C	CE	N/C	GND	N/C	Vinput
s6	Vinput	Voutput1	GND	Voutput2	N/C	CE2	CE1	N/C
s7	Vinput	GND	Voutput	CE	GND	-	-	-
s8	GND	Voutput	GND	Vinput	GND	GND	GND	CE
s9	CE	GND	Vinput	Voutput	Adjust	-	-	-

	PIN 1	PIN2	PIN3	PIN4	PIN5	PIN6	PIN7	PIN8
sa	Feedback	GND	CE	Vinput	Voutput	-	-	-
sb	GND	Voutput	Vinput	N/C	CE	-	-	-
sc	CE	Voutput	N/C	GND	Lx	-	-	-
sd	CE	Voutput	N/C	GND	Ext	-	-	-
se	Delay	Amp out	Feedback	Vinput	GND	Ext	-	-
sf	Delay	GND	Ext	Vinput	Feedback	Ampout	-	-
sg	Vinput	GND	CE	Adjust	Voutput	-	-	-
sh	Voutput	Vinput	CE	GND	Ext	-	-	-
si	Delay	GND	Ext	Vinput	Feedback	CE	-	-
sk	Voutput	Vinput	GND	Reset	CE	-	-	-
sl	Delay	CE	Feedback	Vinput	GND	Ext	-	-
sm	Voutput	Vinput	GND	Reset	Sense	-	-	-
sn	Voutput	Vinput	GND	Reset	Cd	-	-	-
so	Ext	Vinput	Delay	CE	GND	Voutput	-	-
sp	CE	GND	Vinput	Voutput	Cd	-	-	-
sq	Switching	GND	Feedback	CE	Vinput	-	-	-
sr	Reference	GND	Shutdowm	Lx	Output	-	-	-
ss	GND	Lx	Voutput	-	-	-	-	-
st	Feedback	GND	Reference	Output	Lx	-	-	-
su	Feedback	GND	Reference	Lx	Output	Shutdown	-	-
sv	Switching	GND	Feedback	CE	OVP	Vinput	-	-
s w	GND	Ext	Voutput	-	-	-	-	-
sx	Voutput	Vinput	N/C	GND	Lx	-	-	-
sy	Voutput	Vinput	N/C	GND	Ext	-	-	-
sz	Voutput	Vinput	GND	N/C	N/C	-	-	-
t1	Base	Emitter	Collector	Emitter	-	-	-	-
t4	Collector	Collector	Base	Emitter	Collector	Collector	-	-
t6	Collector	Base	Emitter	Emitter	-	-	-	-
t7	Base	Collector	Emitter	N/C	Collector	-	-	-
t8	Emitter	Base	Emitter	Collector	-	-	-	-
t9	Base	Collector	Base	Emitter	-	-	-	-
ta	Base	Emitter	Collector	-	-	-	-	-
tb	Base	Collector	Emitter	-	-	-	-	-
tc	Collector	Emitter	Base	Emitter	-	-	-	-
te	Emitter	Base	Collector	-	-	-	-	-
th	Emitter	Coll/Cath.	Anode	N/C	Coll/Cath.	Base	-	-
tm	Base	Collector	Emitter	Collector	-	-	-	-
tn	Cathode	Base	Emitter	Coll+Anode	-	-	-	-
to	Anode	Base	Emitter	Coll+Cath.	-	-	-	-
tp	Emitter	Collector	Base	Collector	-	-	-	-
tq	N/C	Collector	Emitter	Base	-	-	-	-
tr	Emitter	Collector	Base	-	-	-	-	-
tu	Emitter	Collector	Emitter	Base	-	-	-	-
tz	Anode	Base	Collector	Emitter	N/C	Cathode	-	-
u1	Reset	Voutput1	GND	Cd	CE2	Voutput2	Vinput	Vdet
u2	Reset	Voutput1	GND	Cd	CE2	Voutput2	Vinput	CE1
u3	N/C	Voutput1	GND	Cd	CE2	Voutput2	Vinput	N/C
u4	N/C	Voutput1	GND	Cd	CE2	Voutput2	Vinput	CE1
u5	CE	GND	Vinput	Voutput	Adjust	Cd	-	-
ua	Reset	GND	Cd	GND	Vcc	-	-	-
ub	CE	GND	Vinput	Voutput	N/C	Cd	-	-
uc	GND	CE	Vinput	Voutput	-	-	-	-
ud	CE	GND	Voutput	Ext	Vinput	-	-	-
ue	CC	Feedback	CSP	Vinput	Ext	GND	Rosc	Shutdown
uf	GND	Output	Cap-	Shutdown	+Vcc	Cap+	-	-
ug	CC	Feedback	CSP	Vinput	Ext	GND	Rosc	Rduty
uh	Cd	Voutput1	Voutput2	Cd	CE1	GND	Vinput	CE2
ui	Cd	GND	Vcc1	Vcc	Reset	-	-	-
uj	Vinput	GND	CE	Error	Cd	Voutput	-	-
uk	Voutput	GND	Feedback	CE	Feedback	-	-	-
ul	CE	GND	Feedback	Voutput	Vcc	-	-	-
um	N/C	GND	CE	Vinput	Voutput	-	-	-

	PIN 1	PIN2	PIN3	PIN4	PIN5	PIN6	PIN7	PIN8
un	CE	GND	Cd	Voutput	Vinput	-	-	-
uo	Emitter	Collector	Emitter	Base	Collector	-	-	-
up	CE	GND	Cd	Voutput	N/C	Vinput	-	-
uq	Voutput	Vinput	GND	CE	Feedback	-	-	-
ur	Reset	GND	Cd	N/C	GND	Vcc	-	-
us	N/C	GND	N/C	Vinput	N/C	Voutput	-	-
ut	Vcc	GND	N/C	Reset	-	-	-	-
v1	CE	Vinput	Voutput	N/C	Vinput	GND	-	-
v2	N/C	Vinput	Voutput	N/C	Vinput	GND	-	-
va	Voutput	GND	N/C	N/C	CE	Vinput	-	-
vb	Voutput	GND	GND	N/C	N/C	GND	GND	Vinput
vc	CE	GND	N/C	Voutput	Vinput	-	-	-
vcd	+Vcc	GND	Cap-	GND	Output	Cap+	-	-
vce	Vreg	GND	Ext	Vcc	Select	-	-	-
vd	GND	Voutput	Ext	N/C	CE	-	-	-
vd1	Reset	GND	Vcc	N/C	N/C	-	-	-
vd2	GND	N/C	Reset	MR	Vcc	-	-	-
vd3	Reset/MR	GND	Reset	Cpor	Vcc	-	-	-
vd4	Reset/MR	GND	Reset	Vmon	Vcc	-	-	-
vd5	Reset/MR	GND	Reset	WD	Vcc	-	-	-
vd6	Reset/MR	GND	Vmon	Cpor	Vcc	-	-	-
vd7	Reset/MR	GND	Vmon	WD	Vcc	-	-	-
vd8	Reset	Vcc	GND	N/C	Vcc	N/C	-	-
vd9	Reset	N/C	GND	Vinput/Vcc	-	-	-	-
vda	Reset	Vcc	GND	-	-	-	-	-
vdb	Reset	GND	Vcc	-	-	-	-	-
vdc	GND	Reset	Vcc	-	-	-	-	-
vdd	Vcc	GND	Reset	-	-	-	-	-
vde	GND	Vcc	Reset	-	-	-	-	-
vdf	GND	Vcc	Cd	Reset	-	-	-	-
vdg	GND	Vcc	Reset	N/C	N/C	-	-	-
vdh	GND	Reset	MR	Vcc	-	-	-	-
vdj	Reset	GND	N/C	Vcc	-	-	-	-
vdl	Reset	Vcc	N/C	GND	-	-	-	-
vdm	Reset	Vcc	GND	N/C	N/C	-	-	-
vdo	Reset	Vcc	GND	N/C	Cd	-	-	-
vdp	MR	GND	GND	Reset	Vcc	-	-	-
vdq	N/C	GND	GND	Reset	Vcc	-	-	-
vdr	N/C	GND	N/C	Reset	Vcc	-	-	-
vdv	Reset	GND	N/C	GND	Vcc	-	-	-
vdy	Vcc	Reset	GND	-	-	-	-	-
vdz	N/C	N/C	GND	Reset	Vcc	-	-	-
ve	CE	GND	Vinput	Voutput	GND	N/C	-	-
vf	CE	GND	Cd	Voutput	GND	Vinput	-	-
vg	Cd	GND	CE	Vinput	GND	Voutput	-	-
vh	+Vcc	GND	Cap-	Shutdown	Output	Cap+	-	-
vi	-Input	GND	N/C	Comp	Output	-	-	-
vj	Vinput	Voutput	GND	-	-	-	-	-
vk	Reset	SUB	N/C	Vcc	GND	-	-	-
vka	Reset	SUB	Ct	Vcc	GND	-	-	-
vkb	Vcc	GND	MR	Reset	GND	N/C	-	-
vl	GND	Vinput	Voutput	-	-	-	-	-
vm	Voutput	GND	CE	Vinput	-	-	-	-
vn	CE	GND	Voutput	Vinput	-	-	-	-
vp	GND	Vinput	Voutput	CE	-	-	-	-
vq	Vinput	GND	N/C	N/C	CE	Voutput	-	-
vr	Voutput	Voutput	CE	GND	Vinput	Vinput	-	-
vr1	Voutput	GND	Vinput	CE	Cd	-	-	-
vr2	N/C	GND	CE	Vinput	N/C	Voutput	-	-
vr3	CE	GND	Vinput	Voutput	N/C	-	-	-
vr4	Voutput	GND	N/C	CE	Vinput	-	-	-
vr5	Vinput	Voutput	Voutput	Cd	GND	CE	-	-

	PIN 1	PIN2	PIN3	PIN4	PIN5	PIN6	PIN7	PIN8
vr7	Cd	Delay	GND	Vinput	Voutput	Sense	Error	CE
vr8	Cd	Delay	GND	Vinput	Voutput	Adjust	Error	CE
vr9	Ext	GND	CE	Vinput	Voutput	-	-	-
vra	Vinput	GND	Voutput	N/C	GND	CE	-	-
vrc	Vinput	N/C	Voutput	AE(Mode)	GND	CE	-	-
vrd	Voutput	GND	Vinput	N/C	CE	-	-	-
vre	Ext	Vdet	Voutput	Cd	GND	Vinput	-	-
vrf	CE	GND	Vinput	Ext	Voutput	-	-	-
vrg	Voutput	GND	Vinput	Adjust	CE	-	-	-
vrh	CE	GND	Vinput	Voutput	GND	AE(Mode)	-	-
vri	Adjust	GND	CE	Vinput	Voutput	-	-	-
vrj	Voutput	GND	AE(Mode)	CE	N/C	Vinput	-	-
vrk	Voutput	GND	CE	N/C	GND	Vinput	-	-
vrm	Voutput	Voutput	Adjust	GND	CE	-	-	-
vrn	Voutput	Voutput	N/C	GND	CE	Vinput	-	-
vrp	Voutput	Vinput	Adjust	N/C	CE	-	-	-
vrq	Voutput	GND	CE	N/C	Vinput	-	-	-
vrr	Voutput	GND	CE	Adjust	Vinput	-	-	-
vrs	Adjust	Vinput	Vinput	Vinput	Voutput	Voutput	Voutput	N/C
vrt	GND	Vinput	Voutput	N/C	CE	-	-	-
vrv	CE	GND	Vinput	Voutput	AE(Mode)	-	-	-
vrx	Vinput	GND	CE	Cd	Voutput	-	-	-
vry	CE	Vinput	Voutput	Sense	GND	-	-	-
vrz	CE	Vinput	Voutput	-Error	GND	-	-	-
vs	GND	Vinput	Voutput	N/C	-	-	-	-
vt	Voutput	GND	Vinput	CE	N/C	-	-	-
vta	Voutput	GND	Adjust	CE	GND	Vinput	-	-
vtb	Voutput	GND	N/C	CE	GND	Vinput	-	-
vtc	N/C	Vinput	N/C	Voutput	GND	Bp	CE	N/C
vu	GND	Vinput	Voutput	N/C	N/C	-	-	-
v w	GND	Vinput	Voutput	Ext	CE	-	-	-
vy	CE	GND	N/C	Vinput	Voutput	-	-	-
vz	Voutput	Vinput	GND	N/C	CE	-	-	-
w	Vinput	GND	CE	Error	Voutput	-	-	-
w a	GND	Feedback	Tap	Vinput	Voutput	Sense	Error	CE
w b	GND	Voutput	Vinput	Voutput	-	-	-	-
w c	Adjust	Voutput	Vinput	Voutput	-	-	-	-
w d	Vinput	GND	Cd	Adjust	Voutput	-	-	-
w e	CE	Cd	Vinput	Voutput	GND	GND	GND	GND
w f	Voutput	Voutput	GND	CE	Vinput	Vinput	-	-
w g	Voutput	GND	CE	GND	Vinput	-	-	-
w h	Voutput	GND	CE	GND	GND	Vinput	-	-
x1	Voutput	CE	GND	GND	Vinput	-	-	-
x2	Vinput	GND	GND	CE	Voutput	-	-	-
x3	Vinput	GND	GND	CE	GND	Voutput	-	-
x4	Voutput1	Voutput2	GND	CE2	Vinput	CE1	-	-
x5	CE1	Vinput	CE2	Voutput2	GND	Voutput1	-	-
x6	GND	Voutput1	Voutput2	GND	CE2	Vinput2	Vinput1	CE1
x7	Voutput	GND	GND	CE	Vinput	-	-	-
x8	Vinput	GND	GND	Adjust	GND	Voutput	-	-
x9	Vinput	GND	CE	AE(Mode)	Voutput	-	-	-
xa	N/C	GND	CE	Voutput	Vinput	-	-	-
xb	Voutput	Sense	N/C	GND	CE	N/C	N/C	Vinput
xc	Voutput	Adjust	N/C	GND	CE	N/C	N/C	Vinput
xd	Ext	Isense	Vinput	CE/SS	Clk	CC	Voutput	GND
xf	Reset	GND	Reset	MR	Vcc	-	-	-
xg	Reset	GND	Reset	WD	Vcc	-	-	-
xh	WD	MR	N/C	Reset	GND	Vinput	-	-
xj	Dout	V-	Cout	Ct	Vcc	GND	-	-
xk	Dout	V-	Cout	DS	Vcc	GND	-	-
xm	CE	N/C	GND	Voutput	Vinput	-	-	-
xn	-Reset	GND	+Reset	Reset In	Vcc	-	-	-

	PIN 1	PIN2	PIN3	PIN4	PIN5	PIN6	PIN7	PIN8
xo	-Input	GND	Output	-Output	Vcc	Input	-	-
xp	-Input	GND	Output	Vcc	Vagc	Input	-	-
xq	WD	+Reset	N/C	Reset	GND	Vinput/Vcc	-	-
xr	Vinput	N/C	Voutput	CE	N/C	GND	-	-
xra	Vinput	N/C	Voutput	CE	Adjust	GND	-	-
xs	MR	Reset	N/C	Reset	GND	Vinput/Vcc	-	-
xt	N/C	Voutput	N/C	GND	N/C	Vinput	-	-
xu	CE	GND	Vinput	Voutput	N/C	N/C	-	-
xv	CE2	Vinput	CE1	GND	Voutput1	Voutput2	-	-
xx	AE(Mode)	GND	Voutput	Vinput	CE	-	-	-
y1	Voutput	GND	N/C	Vinput	-	-	-	-
y2	N/C	N/C	GND	Voutput	Vinput	-	-	-
y3	Cd	GND	GND	Voutput	Vinput	-	-	-
y4	N/C	N/C	GND	Vcc	Reset	-	-	-
y5	Voutput	GND	CE	Vinput	GND	Lx	-	-
y6	Vinput	CE1	CE2	GND	Voutput2	Voutput1	-	-
ya	Voutput	GND	CE	Reset	Vinput	-	-	-
yb	Voutput	GND	Sense	Reset	Vinput	-	-	-
yc	Voutput	GND	Cd	Reset	Vinput	-	-	-
yd	Cd	GND	N/C	Reset	Vcc	-	-	-
ye	GND	Cd	Vcc	Reset	-	-	-	-
yf	CE1	GND	CE2	Voutput2	Vinput	Voutput1	-	-
yg	Reset	GND	MR1	Reset In	MR2	-	-	-
yh	CE	GND	Vbat	Vdrv	Vinput	Vsense	-	-
yj	Vinput	GND	CE	Feedback	SW/Voutput	-	-	-
yk	CE	GND	Feedback	Isense	Vinput	Sw/Voutput	-	-
yl	Vinput	GND	Voutput	N/C	GND	N/C	-	-
ym	Vinput	GND	N/C	N/C	Voutput	-	-	-
yo	Vinput	CE1	CE2	N/C	Voutput2	GND	N/C	Voutput1
yp	Vinput	GND	CE	GND	Voutput	-	-	-
yq	Vinput	CE1	CE2	N/C	GND	N/C	Voutput2	Voutput1
yr	N/C	GND	Voutput	Vinput	-	-	-	-
ys	Vinput	GND	CE	N/C	N/C	Voutput	-	-
yt	Vinput	GND	N/C	GND	GND	Voutput	-	-
yu	N/C	GND	Reset	Vinput	-	-	-	-
yv	CE1	GND	CE2	N/C	N/C	Voutput2	Vinput	Voutput1
yx	MR	GND	N/C	Reset	Vcc	-	-	-
z1	Vinput	GND	GND	Reset	Cd	-	-	-
z2	Vinput	GND	GND	Reset	Sense	-	-	-
z3	Sense	GND	Cd	Vinput	N/C	Reset	-	-
z4	Reset	Vcc	GND	Cd	Sense	-	-	-
z5	Reset	GND	Vcc	Cd	Sense	-	-	-
z6	Vinput	N/C	GND	Reset	GND	MR	-	-
z7	Reset	Vcc	GND	MR	Vcc	N/C	-	-
z8	Vcc	GND	MR	Reset	N/C	-	-	-
z9	Reset	Vcc	Cd	N/C	GND	-	-	-
za	Reset	Vcc	Cd	GND	N/C	-	-	-
zb	Voutput1	GND	CE1	CE2	Vinput	Voutput2	-	-
zc	Voutput2	GND	CE2	CE1	Vinput	Voutput1	-	-
zd	Vbias	GND	CE	Vinput	N/C	Voutput	-	-
ze	Vinput	GND	CE	Vbias	Voutput	-	-	-
zf	Vbias	GND	Voutput	Vinput	CE	-	-	-
zg	CE	N/C	Vinput	Voutput	N/C	GND	-	-
zh	Vinput	GND	CE	Ext	Voutput	-	-	-
zi	EL+	HV	EL-	Ind	GND	Vcc	-	-
zj	Vinput	CE1	CE2	CE3	GND	Voutput3	Voutput2	Voutput1
zk	CE	N/C	Voutput	Vinput	GND	Vbias	-	-
zl	CE	GND	Vbias	Vinput	Voutput	-	-	-
zm	Ext	Vinput	GND	CE	Voutput	-	-	-
zn	Ext	Vinput	GND	CE	Feedback	-	-	-
zo	GND	Vinput	Ext	Voutput	N/C	CE	-	-
zp	GND	Vinput	Ext	Feedback	N/C	CE	-	-

	PIN 1	PIN2	PIN3	PIN4	PIN5	PIN6	PIN7	PIN8
zq	Lx	GND	Voutput	CE/MODE	Vinput	-	-	-
zr	CE	GND	Vinput	Voutput	Lx	-	-	-
zs	N/C	GND	Vinput	Voutput	Lx	-	-	-
zt	Voutput	GND	CE	Cd	Vinput	-	-	-
zu	Voutput	GND	CE	Cd	GND	Vinput	-	-
zv	Cd	Vinput	GND	Voutput	CE	-	-	-
z w	CE1	Vinput	CE2	Voutput2	Voutput1	TAB=GND	-	-
zx	CE	N/C	Vinput	Voutput	GND	Reset	-	-
zy	Sense	N/C	Vinput	Voutput	GND	Reset	-	-
zz	Cd	N/C	Vinput	Voutput	GND	Reset	-	-

SECTION 14
SMD-code marking attribute



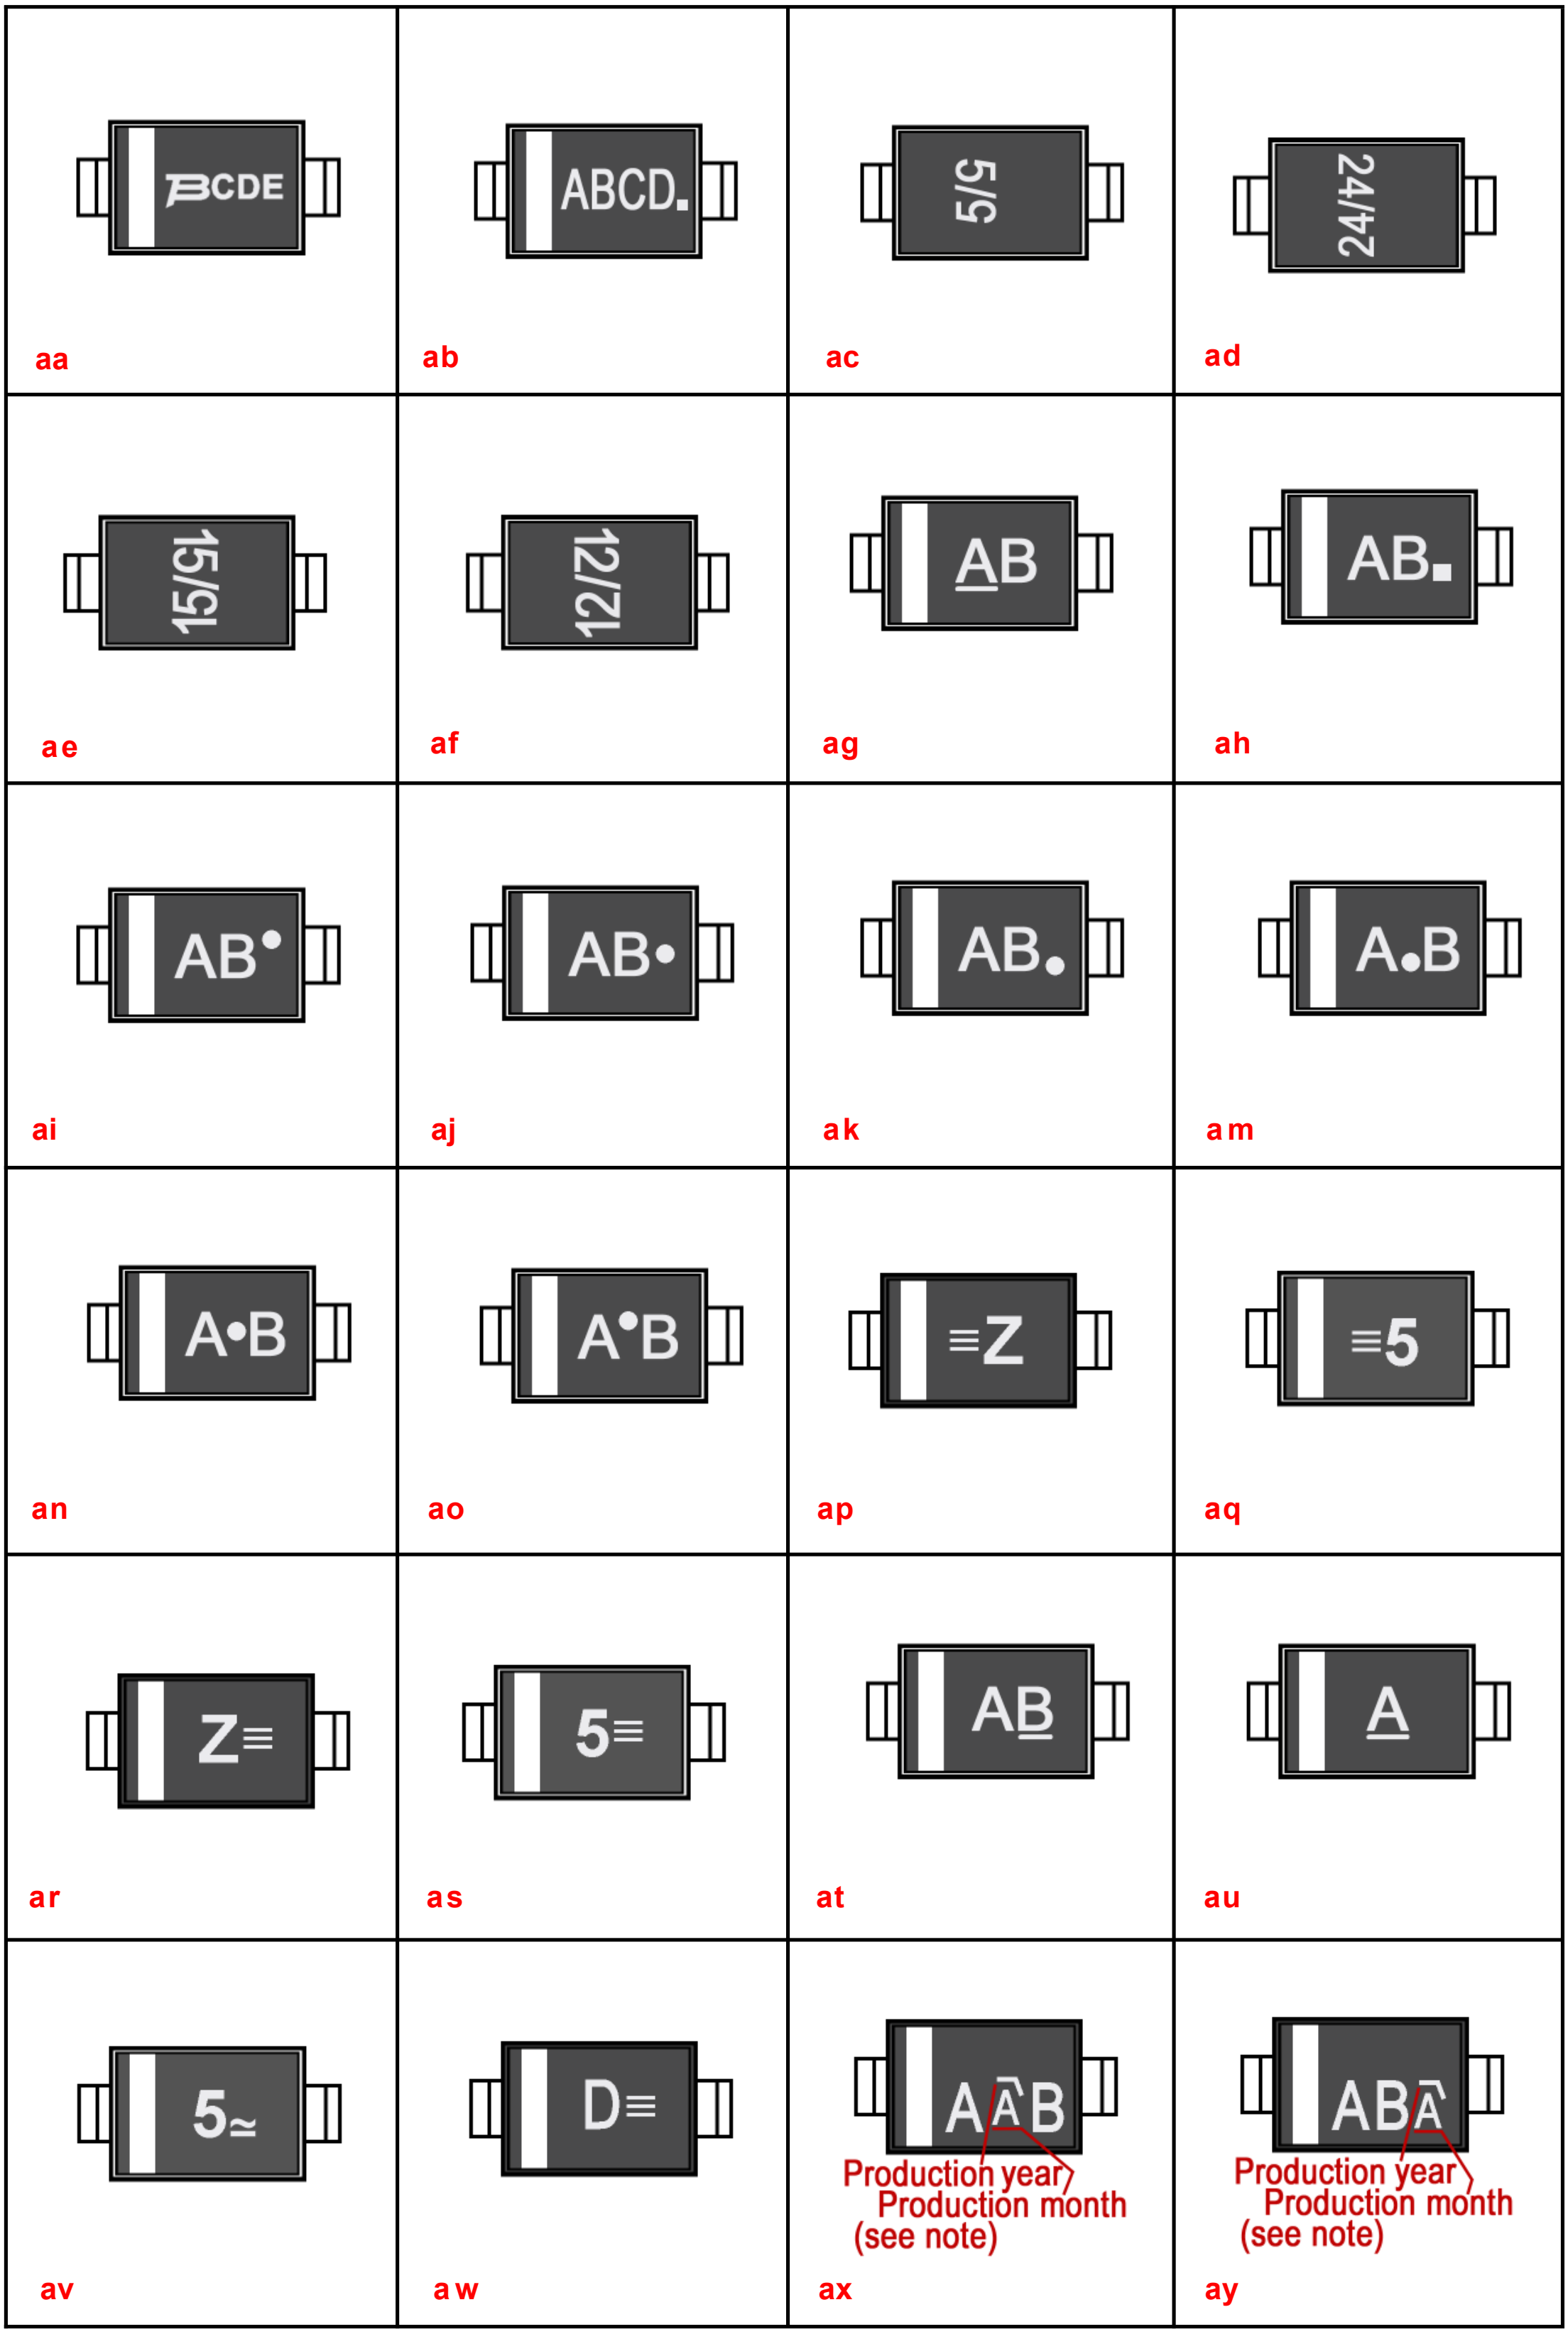
aa
ABCD.
ab
ac
ad
ae
af
AB
ag
AB
ah
AB
ai
AB
aj
AB
ak
A B
am
A•B
an
A B
ao
≡Z
ap
≡5
aq
Z≡
ar
5≡
as
AB
at
A
au
5≃
av
D≡
aw
Production year
Production month
(see note)
ax
Production year
Production month
(see note)
ay



az

ba



bb

bc



bd



be



bf



bn



bo



bp

bq

br

bs



bt



ca



cb



cc



cd



ce



cf



cg



ch



ci



cj



ck



cm



cn



co



cp

cq



cr

cs

ct



cu



cv



cw



cx



cy



cz



da



db



dc



dd



de



df



ea



eb



ec

 ed	 ef	 eg	 eh
 ei	 ej	 ek	 em
 en	 eo	 ep	 eq
 er	 es	 et	 eu
 ec	 ew	 ex	 ey
 ez	 fa	 fc	 fd



fe



fg



fh



fi



fj



fk



fm



fn



fp



ga



gb

gc



ge



gf



gg



gh



gi



gj



gk



ha



hb



hc



hd



he

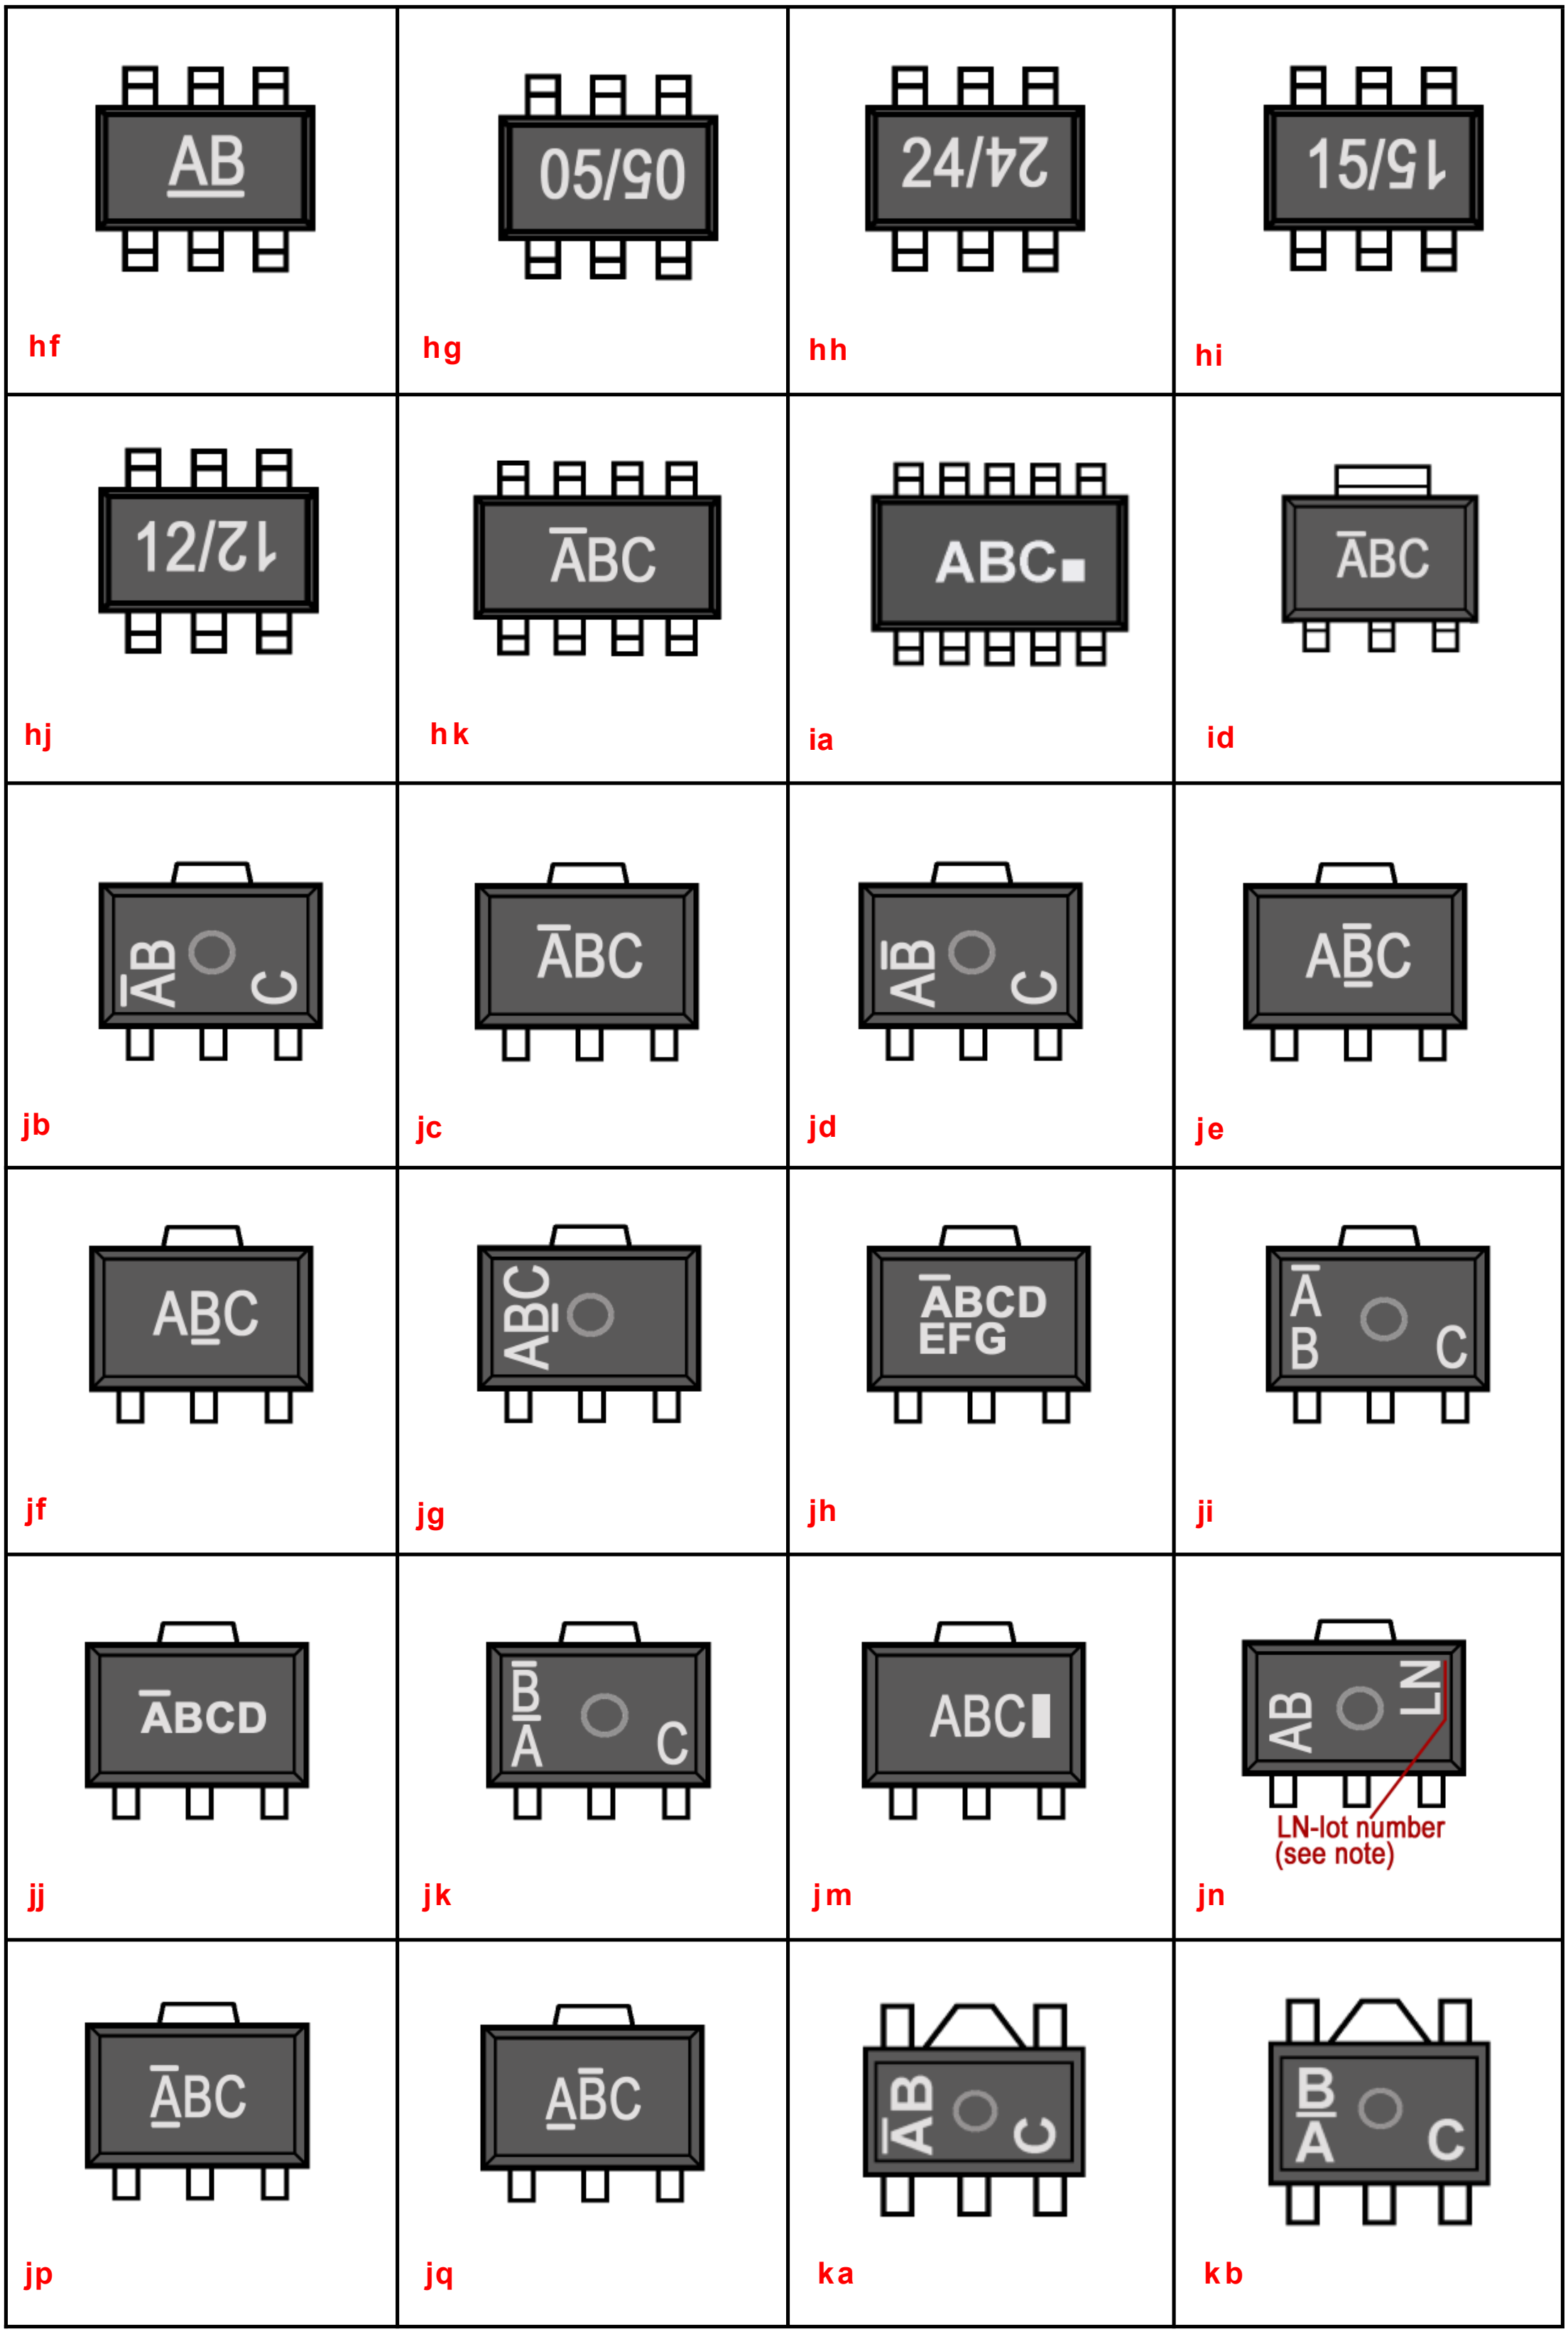
hf
hg
hh
hi
hj
hk
ia
id
jb
jc
jd
je
jf
jg
jh
ji
jj
jk
jm
jn
LN-lot number
(see note)
jp
jq
ka
kb



kc



kd

ke



kf



kg



kj



ma



mb

mc



md

me



mf



mg

mh



mi



mj

mk

SECTION15

SMD-code marking style

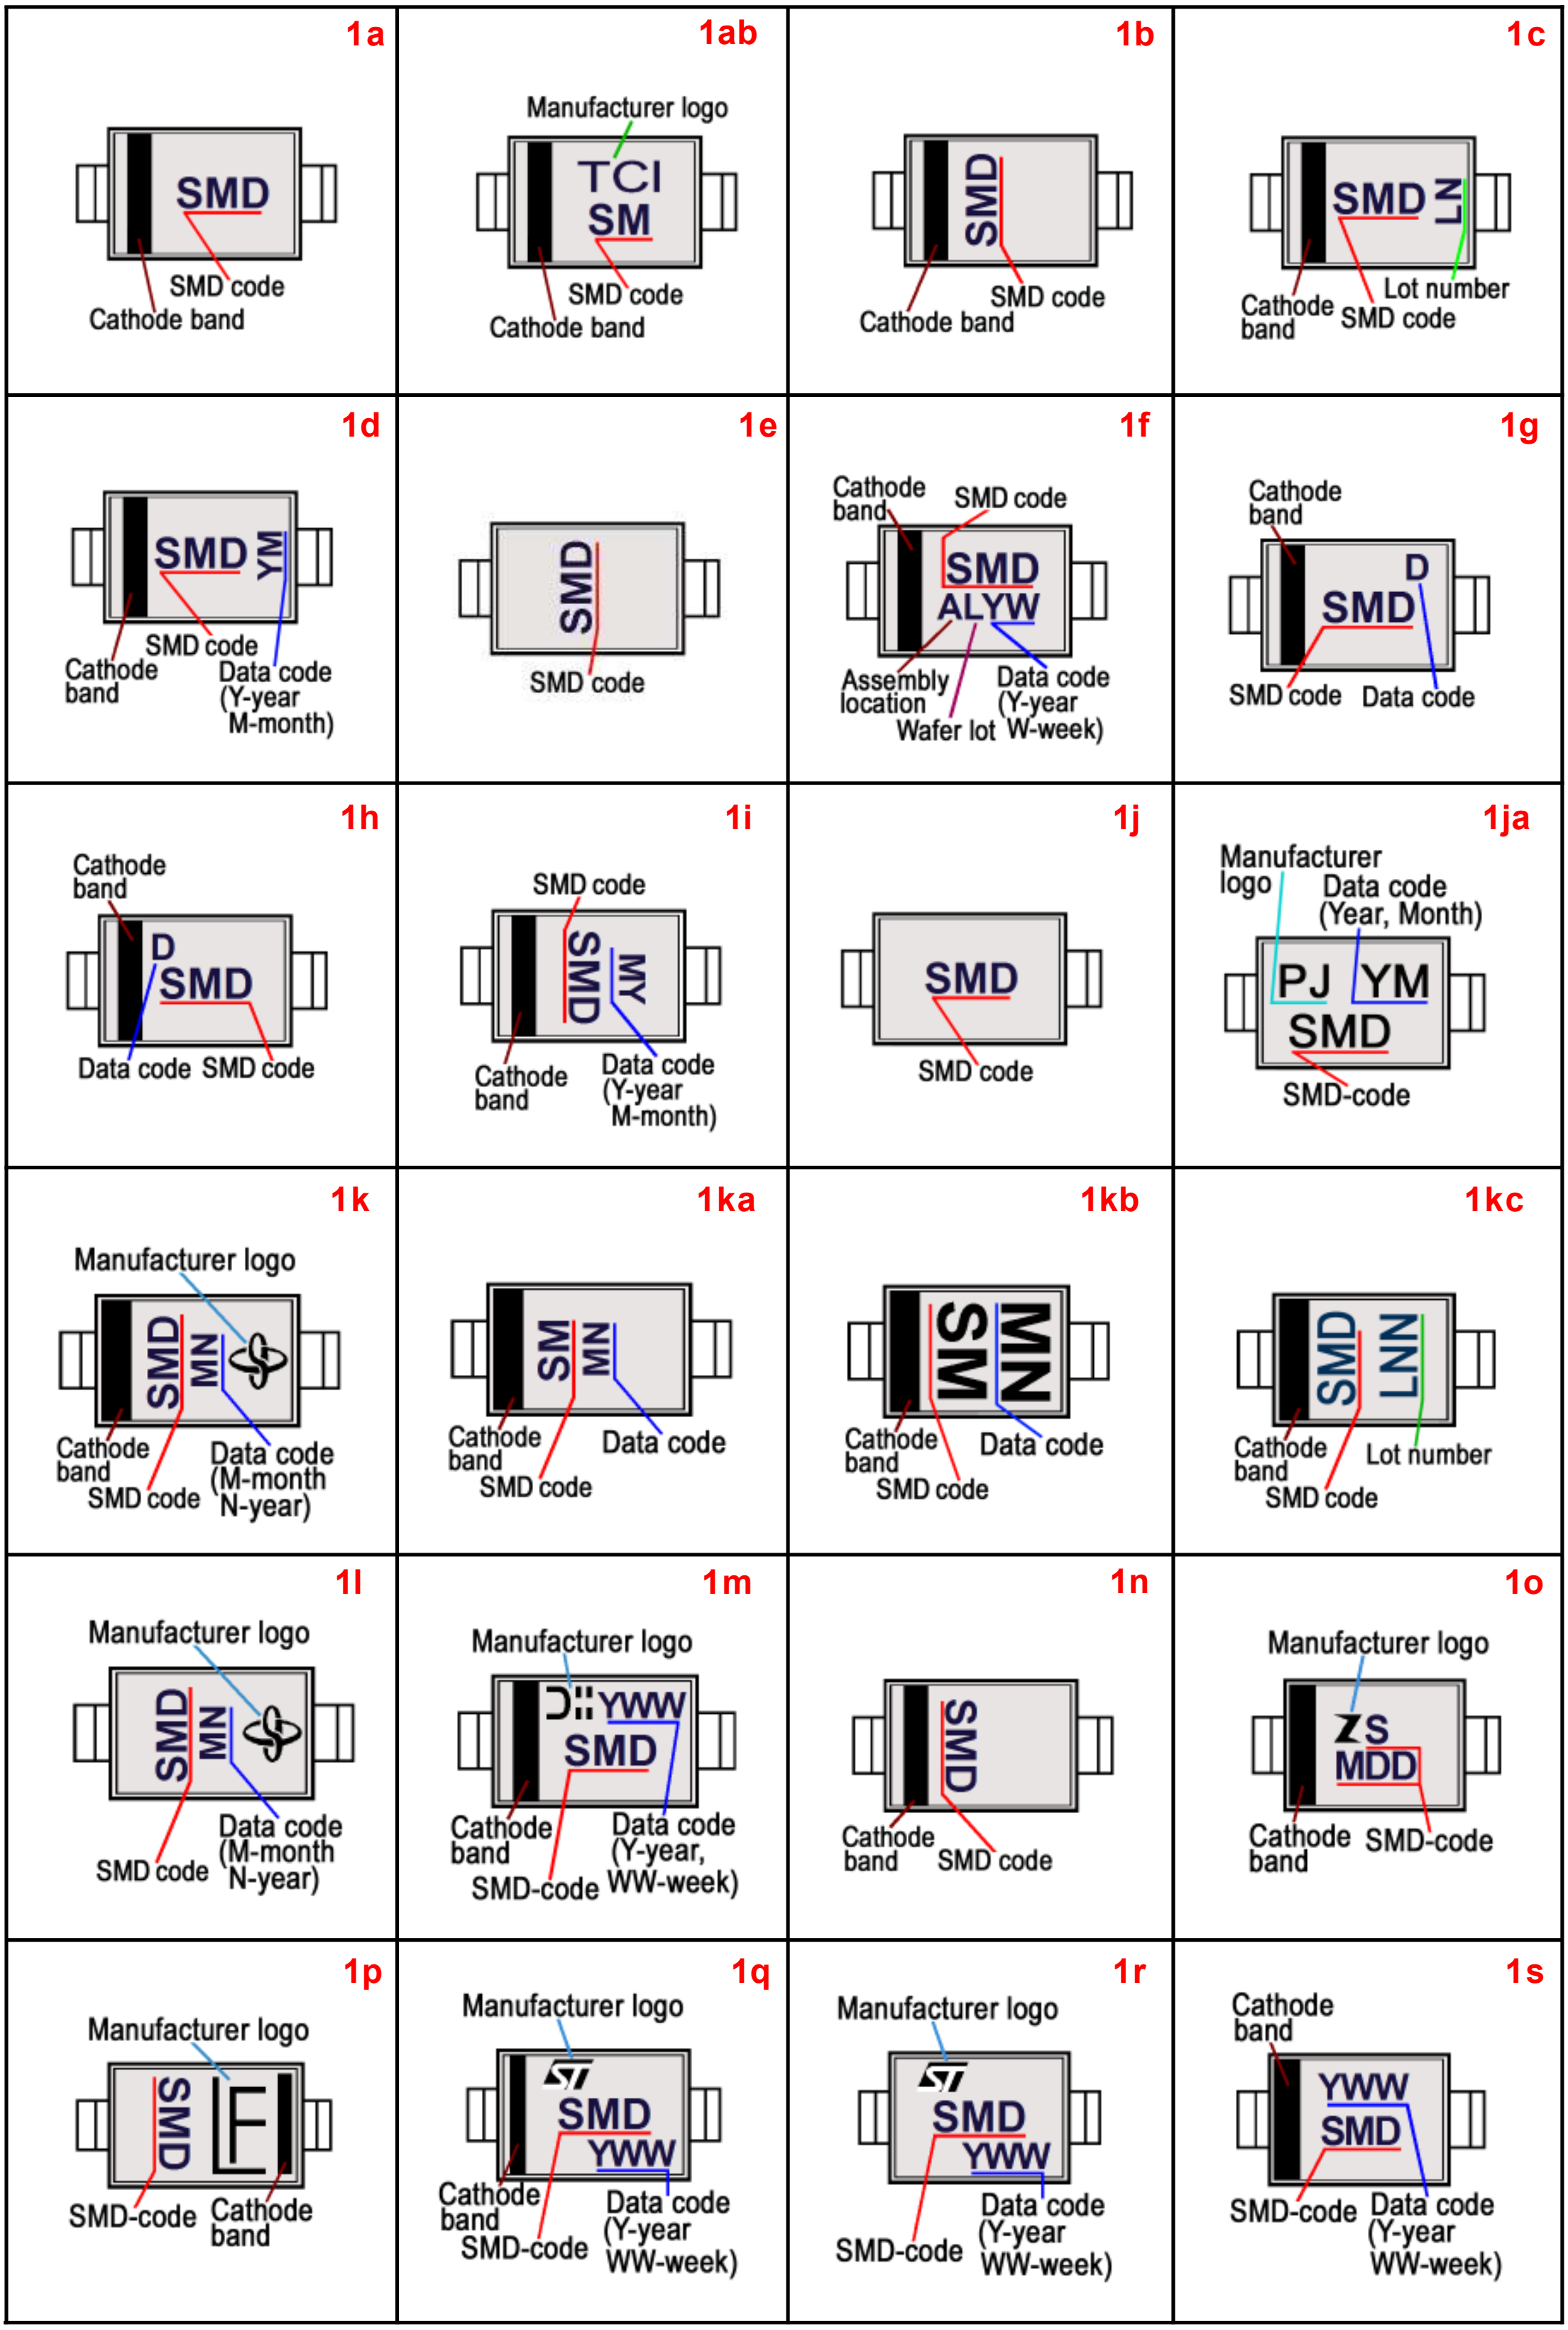
1a
SMD
SMD code
Cathode band
1ab
Manufacturer logo
TCI
SM
SMD code
Cathode band
1b
SMD
SMD code
Cathode band
1c
SMD
LN
Lot number
Cathode band
SMD code
1d
SMD
YM
SMD code
Cathode band
Data code (Y-year M-month)
1e
SMD
SMD code
1f
Cathode band
SMD code
SMD
ALYW
Assembly location
Data code (Y-year W-week)
Wafer lot
1g
Cathode band
D
SMD
SMD code
Data code
1h
Cathode band
D
SMD
Data code
SMD code
1i
SMD code
SMD
MY
Cathode band
Data code (Y-year M-month)
1j
SMD
SMD code
1ja
Manufacturer logo
Data code (Year, Month)
PJ
YM
SMD
SMD-code
1k
Manufacturer logo
SMD
MN
Cathode band
Data code (M-month N-year)
SMD code
1ka
SM
MN
Cathode band
Data code
SMD code
1kb
SM
MN
Cathode band
Data code
SMD code
1kc
SMD
LNN
Cathode band
Lot number
SMD code
1l
Manufacturer logo
SMD
MN
Data code (M-month N-year)
SMD code
1m
Manufacturer logo
YWW
SMD
Cathode band
Data code (Y-year, WW-week)
SMD-code
1n
SMD
Cathode band
SMD code
1o
Manufacturer logo
ZS
MDD
Cathode band
SMD-code
1p
Manufacturer logo
SMD
F
SMD-code
Cathode band
1q
Manufacturer logo
SMD
YWW
Cathode band
Data code (Y-year WW-week)
SMD-code
1r
Manufacturer logo
SMD
YWW
Data code (Y-year WW-week)
SMD-code
1s
Cathode band
YWW
SMD
SMD-code
Data code (Y-year WW-week)

1t



1u



1ua



1v



1w



1x



1z



2



2a



2b



2ba



2c



2d



2e



2f



2g



2h



2i



2j



2ja



2jb



2k



2m



2n



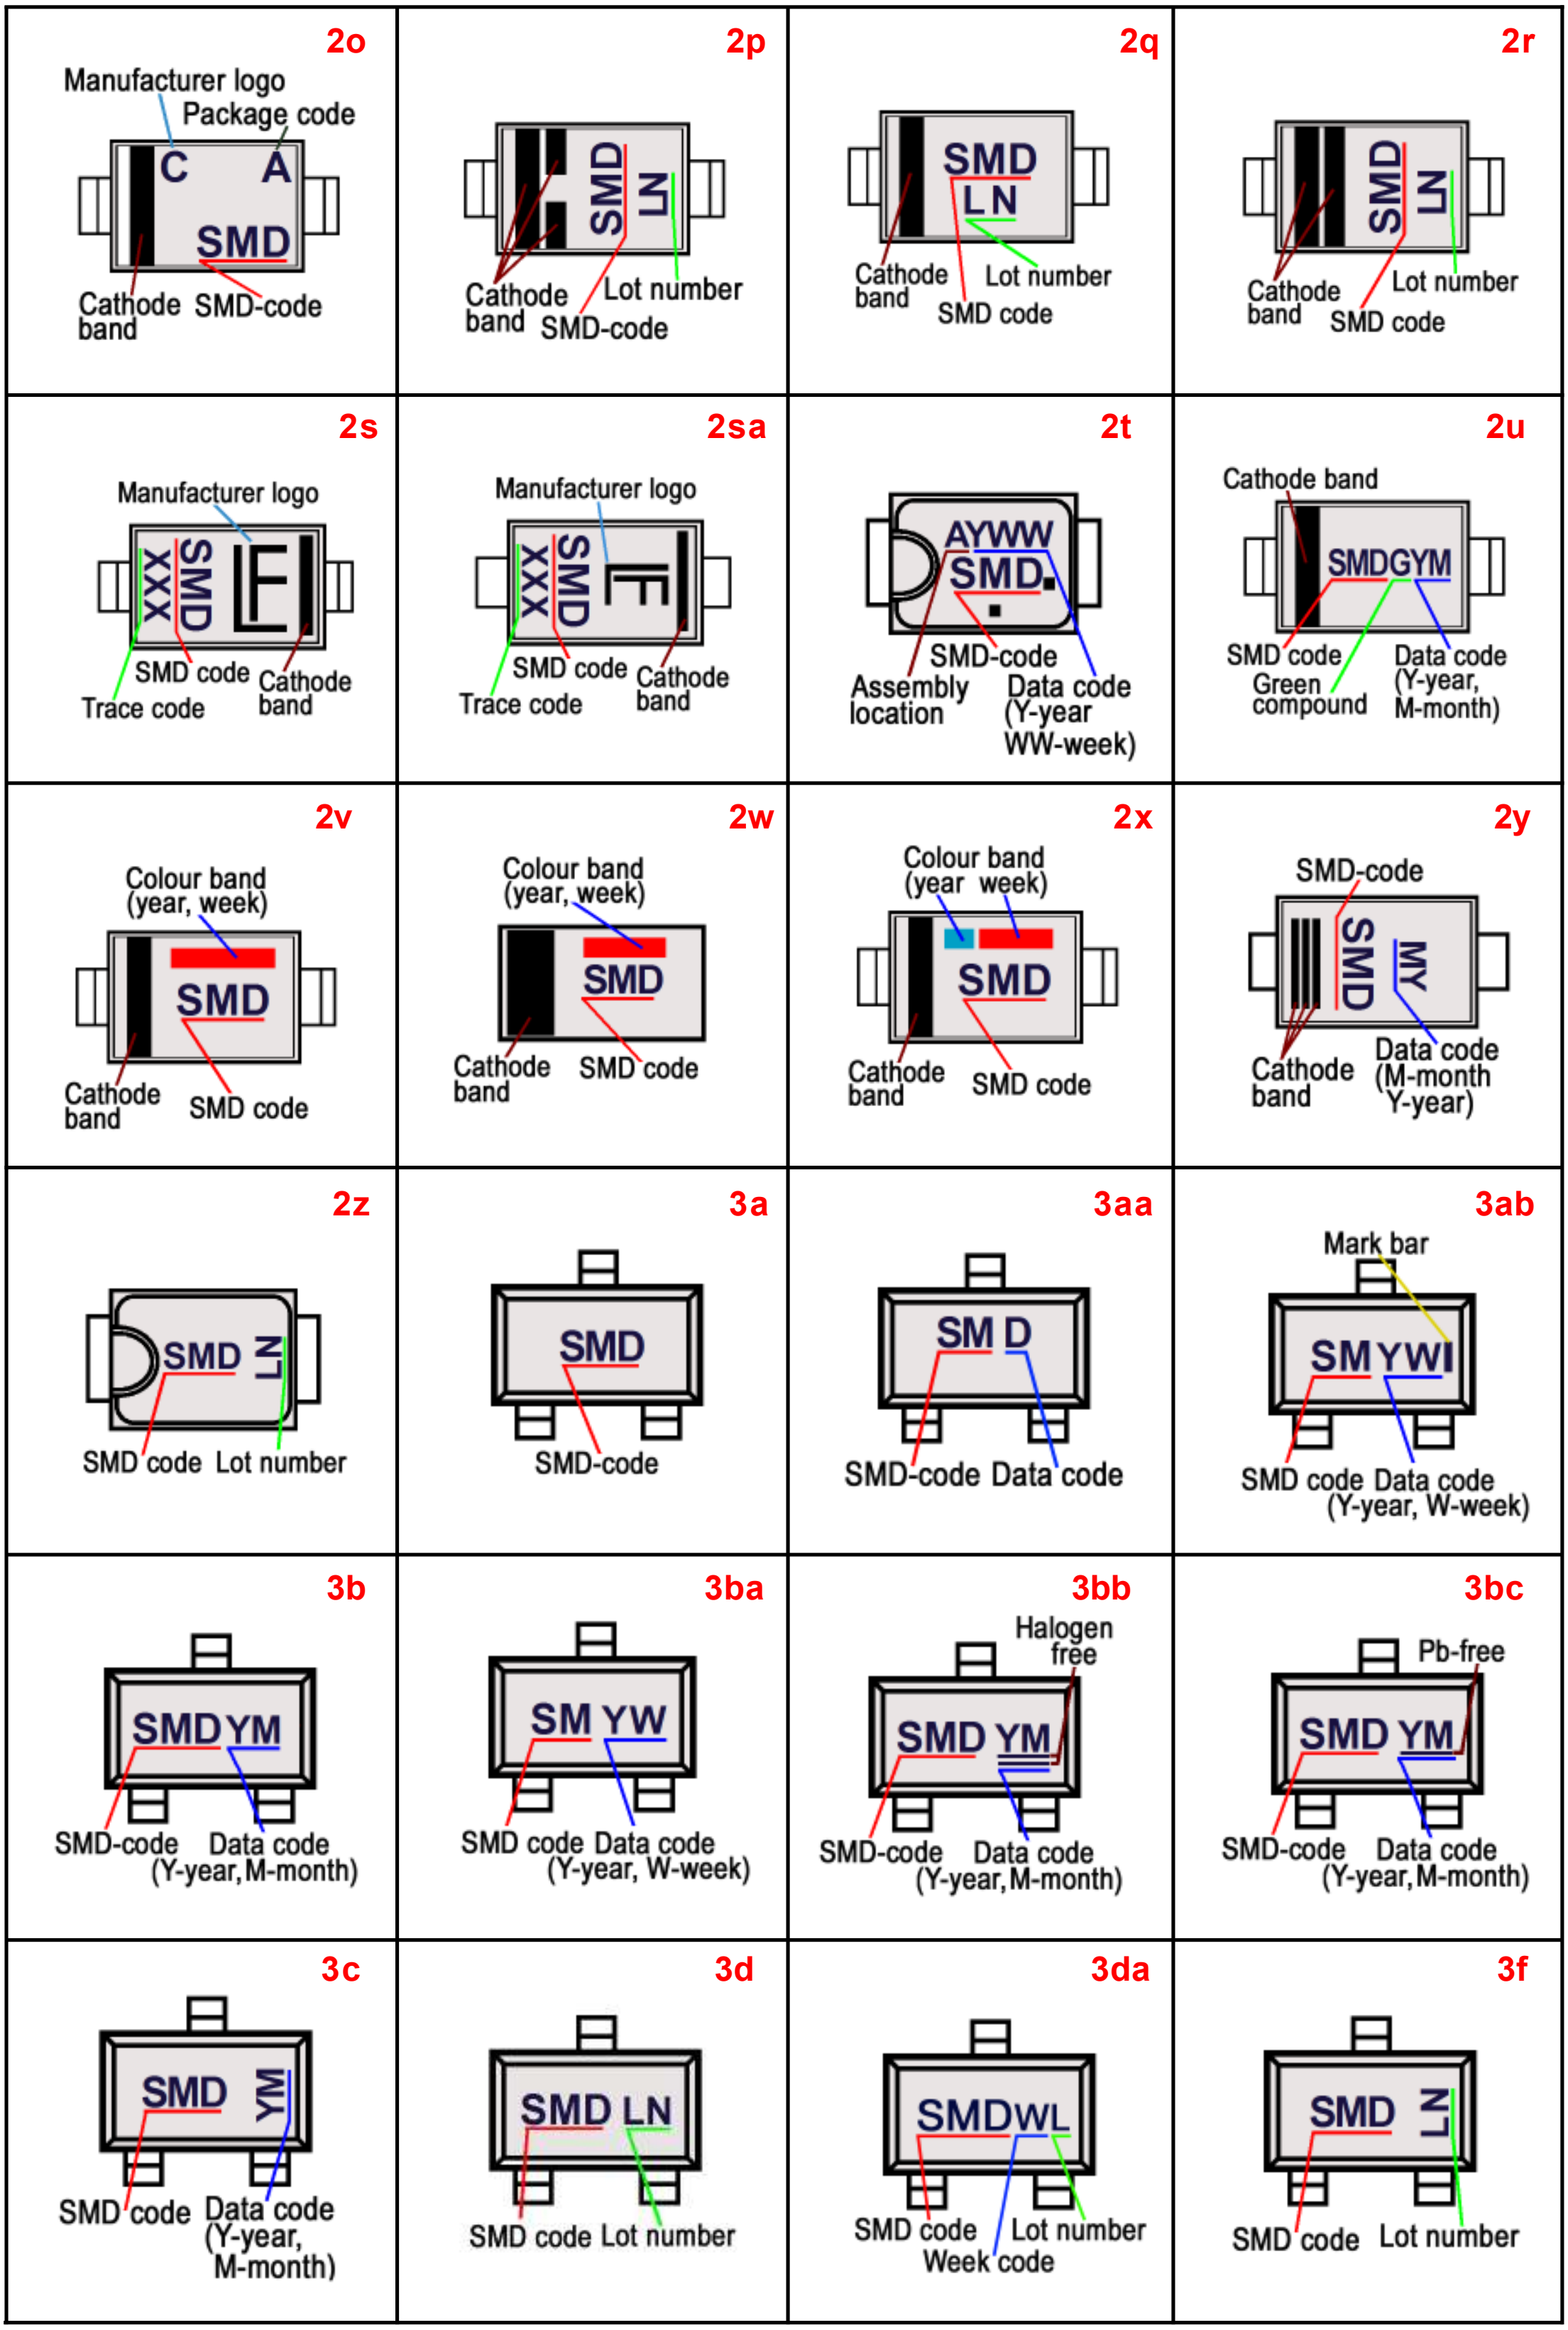
2o
Manufacturer logo
Package code
C
A
SMD
Cathode band
SMD-code
2p
SMD
LN
Cathode band
Lot number
SMD-code
2q
SMD
LN
Cathode band
Lot number
SMD code
2r
SMD
LN
Cathode band
Lot number
SMD code
2s
Manufacturer logo
XXX
SMD
SMD code
Cathode band
Trace code
2sa
Manufacturer logo
XXX
SMD
SMD code
Cathode band
Trace code
2t
AYWW
SMD
SMD-code
Assembly location
Data code (Y-year WW-week)
2u
Cathode band
SMDGYM
SMD code
Green compound
Data code (Y-year, M-month)
2v
Colour band (year, week)
SMD
Cathode band
SMD code
2w
Colour band (year, week)
SMD
Cathode band
SMD code
2x
Colour band (year week)
SMD
Cathode band
SMD code
2y
SMD-code
SMD
MY
Cathode band
Data code (M-month Y-year)
2z
SMD
LN
SMD code
Lot number
3a
SMD
SMD-code
3aa
SM D
SMD-code
Data code
3ab
Mark bar
SM YWI
SMD code
Data code (Y-year, W-week)
3b
SMD YM
SMD-code
Data code (Y-year, M-month)
3ba
SM YW
SMD code
Data code (Y-year, W-week)
3bb
Halogen free
SMD YM
SMD-code
Data code (Y-year, M-month)
3bc
Pb-free
SMD YM
SMD-code
Data code (Y-year, M-month)
3c
SMD
YM
SMD code
Data code (Y-year, M-month)
3d
SMD LN
SMD code
Lot number
3da
SMDWL
SMD code
Week code
Lot number
3f
SMD
LN
SMD code
Lot number

3g



3h



3ha



3hb



3hc



3i



3j



3k



3m



3n



3o



3p



3q



4a



4b



4ba



4bb



4c



4d



4e



4f



4g



4ga



4h



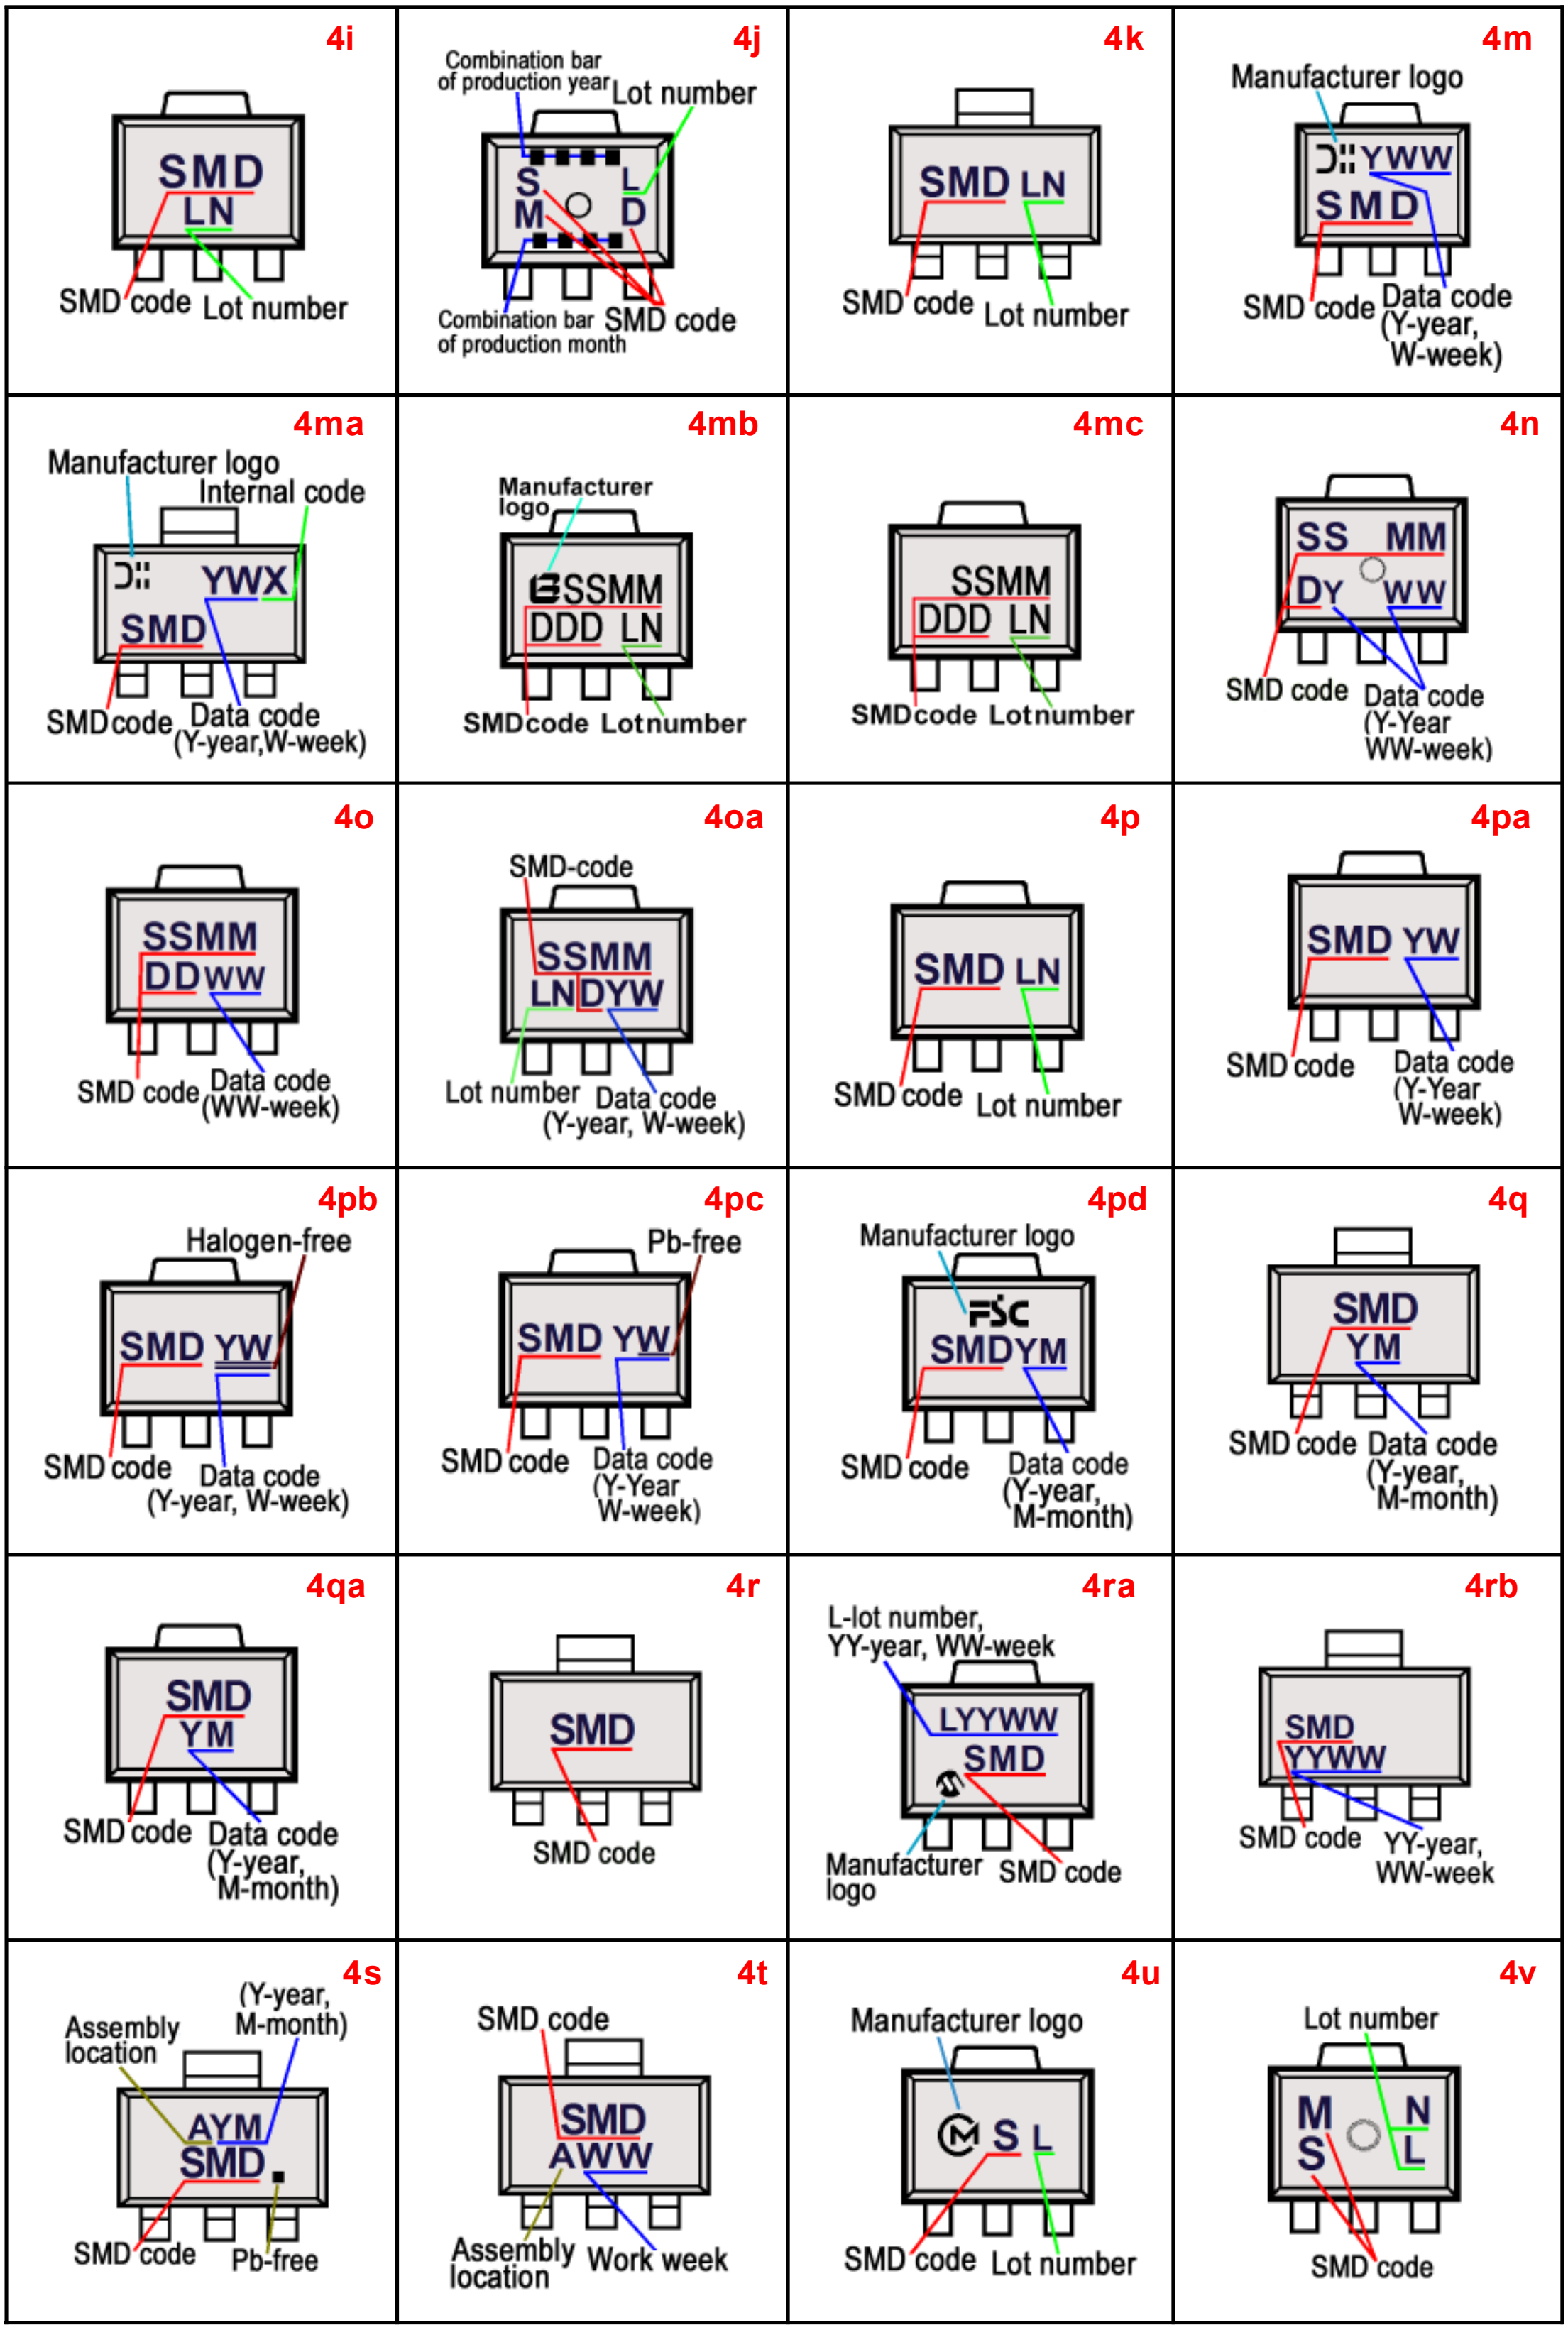
4i
SMD
LN
SMD code
Lot number
4j
Combination bar of production year
Lot number
S L
M D
Combination bar of production month
SMD code
4k
SMD LN
SMD code
Lot number
4m
Manufacturer logo
YWW
SMD
SMD code
Data code (Y-year, W-week)
4ma
Manufacturer logo
Internal code
YWX
SMD
SMDcode
Data code (Y-year,W-week)
4mb
Manufacturer logo
SSMM
DDD LN
SMDcode Lotnumber
4mc
SSMM
DDD LN
SMDcode Lotnumber
4n
SS MM
DY WW
SMD code
Data code (Y-Year WW-week)
4o
SSMM
DDWW
SMD code
Data code (WW-week)
4oa
SMD-code
SSMM
LNDYW
Lot number
Data code (Y-year, W-week)
4p
SMD LN
SMD code
Lot number
4pa
SMD YW
SMD code
Data code (Y-Year W-week)
4pb
Halogen-free
SMD YW
SMD code
Data code (Y-year, W-week)
4pc
Pb-free
SMD YW
SMD code
Data code (Y-Year W-week)
4pd
Manufacturer logo
FSC
SMDYM
SMD code
Data code (Y-year, M-month)
4q
SMD
YM
SMD code Data code (Y-year, M-month)
4qa
SMD
YM
SMD code
Data code (Y-year, M-month)
4r
SMD
SMD code
4ra
L-lot number, YY-year, WW-week
LYYWW
SMD
Manufacturer logo
SMD code
4rb
SMD
YYWW
SMD code
YY-year, WW-week
4s
(Y-year, M-month)
Assembly location
AYM
SMD
SMD code
Pb-free
4t
SMD code
SMD
AWW
Assembly location
Work week
4u
Manufacturer logo
S L
SMD code
Lot number
4v
Lot number
M N
S L
SMD code

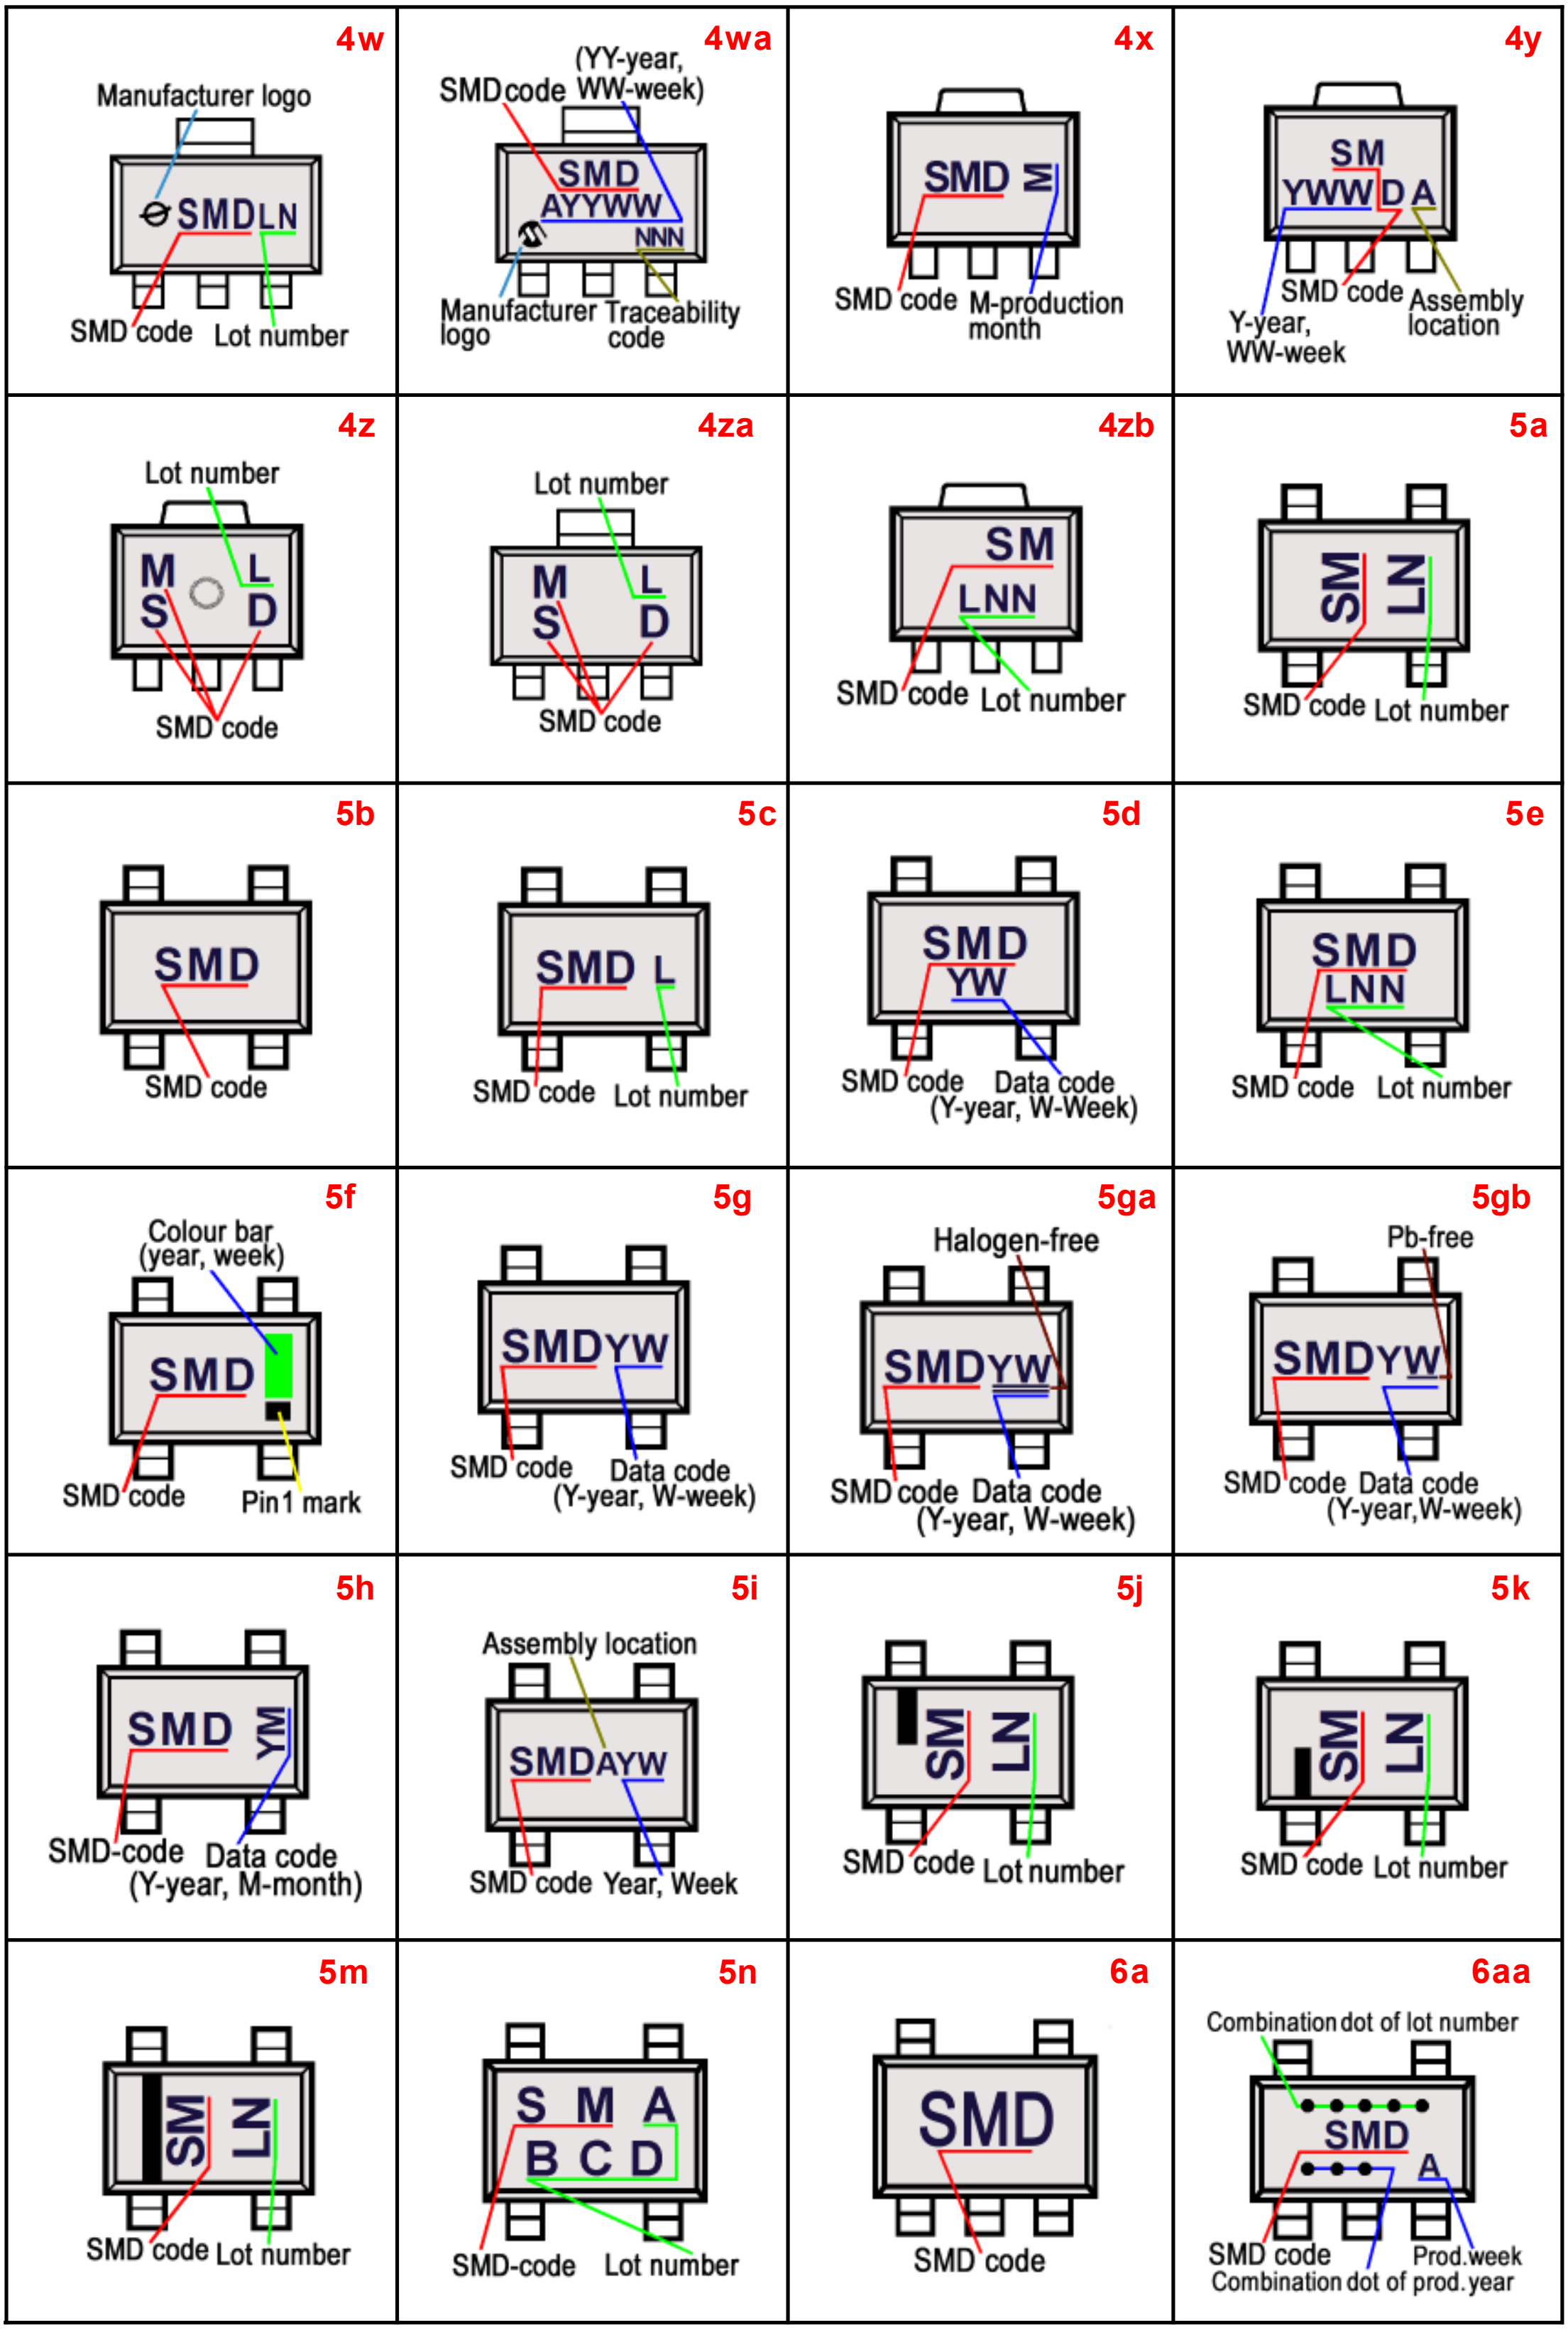
4w
Manufacturer logo
SMD LN
SMD code
Lot number
4wa
SMD code
(YY-year, WW-week)
SMD
AYYWW
NNN
Manufacturer logo
Traceability code
4x
SMD M
SMD code
M-production month
4y
SM
YWW D A
SMD code
Y-year, WW-week
Assembly location
4z
Lot number
M L
S D
SMD code
4za
Lot number
M L
S D
SMD code
4zb
SM
LNN
SMD code
Lot number
5a
SM LN
SMD code
Lot number
5b
SMD
SMD code
5c
SMD L
SMD code
Lot number
5d
SMD
YW
SMD code
Data code
(Y-year, W-Week)
5e
SMD
LNN
SMD code
Lot number
5f
Colour bar
(year, week)
SMD
SMD code
Pin1 mark
5g
SMDYW
SMD code
Data code
(Y-year, W-week)
5ga
Halogen-free
SMDYW
SMD code
Data code
(Y-year, W-week)
5gb
Pb-free
SMDYW
SMD code
Data code
(Y-year,W-week)
5h
SMD YM
SMD-code
Data code
(Y-year, M-month)
5i
Assembly location
SMDAYW
SMD code
Year, Week
5j
SM LN
SMD code
Lot number
5k
SM LN
SMD code
Lot number
5m
SM LN
SMD code
Lot number
5n
S M A
B C D
SMD-code
Lot number
6a
SMD
SMD code
6aa
Combination dot of lot number
SMD
A
SMD code
Prod.week
Combination dot of prod.year

6b



6c



6d



6e



6f



6g



6h



6hb



6i



6j



6ja



6k



6ka



6kb



6kc



6kd



6ke



6kf



6kg



6l



6m



6ma



6n



6p



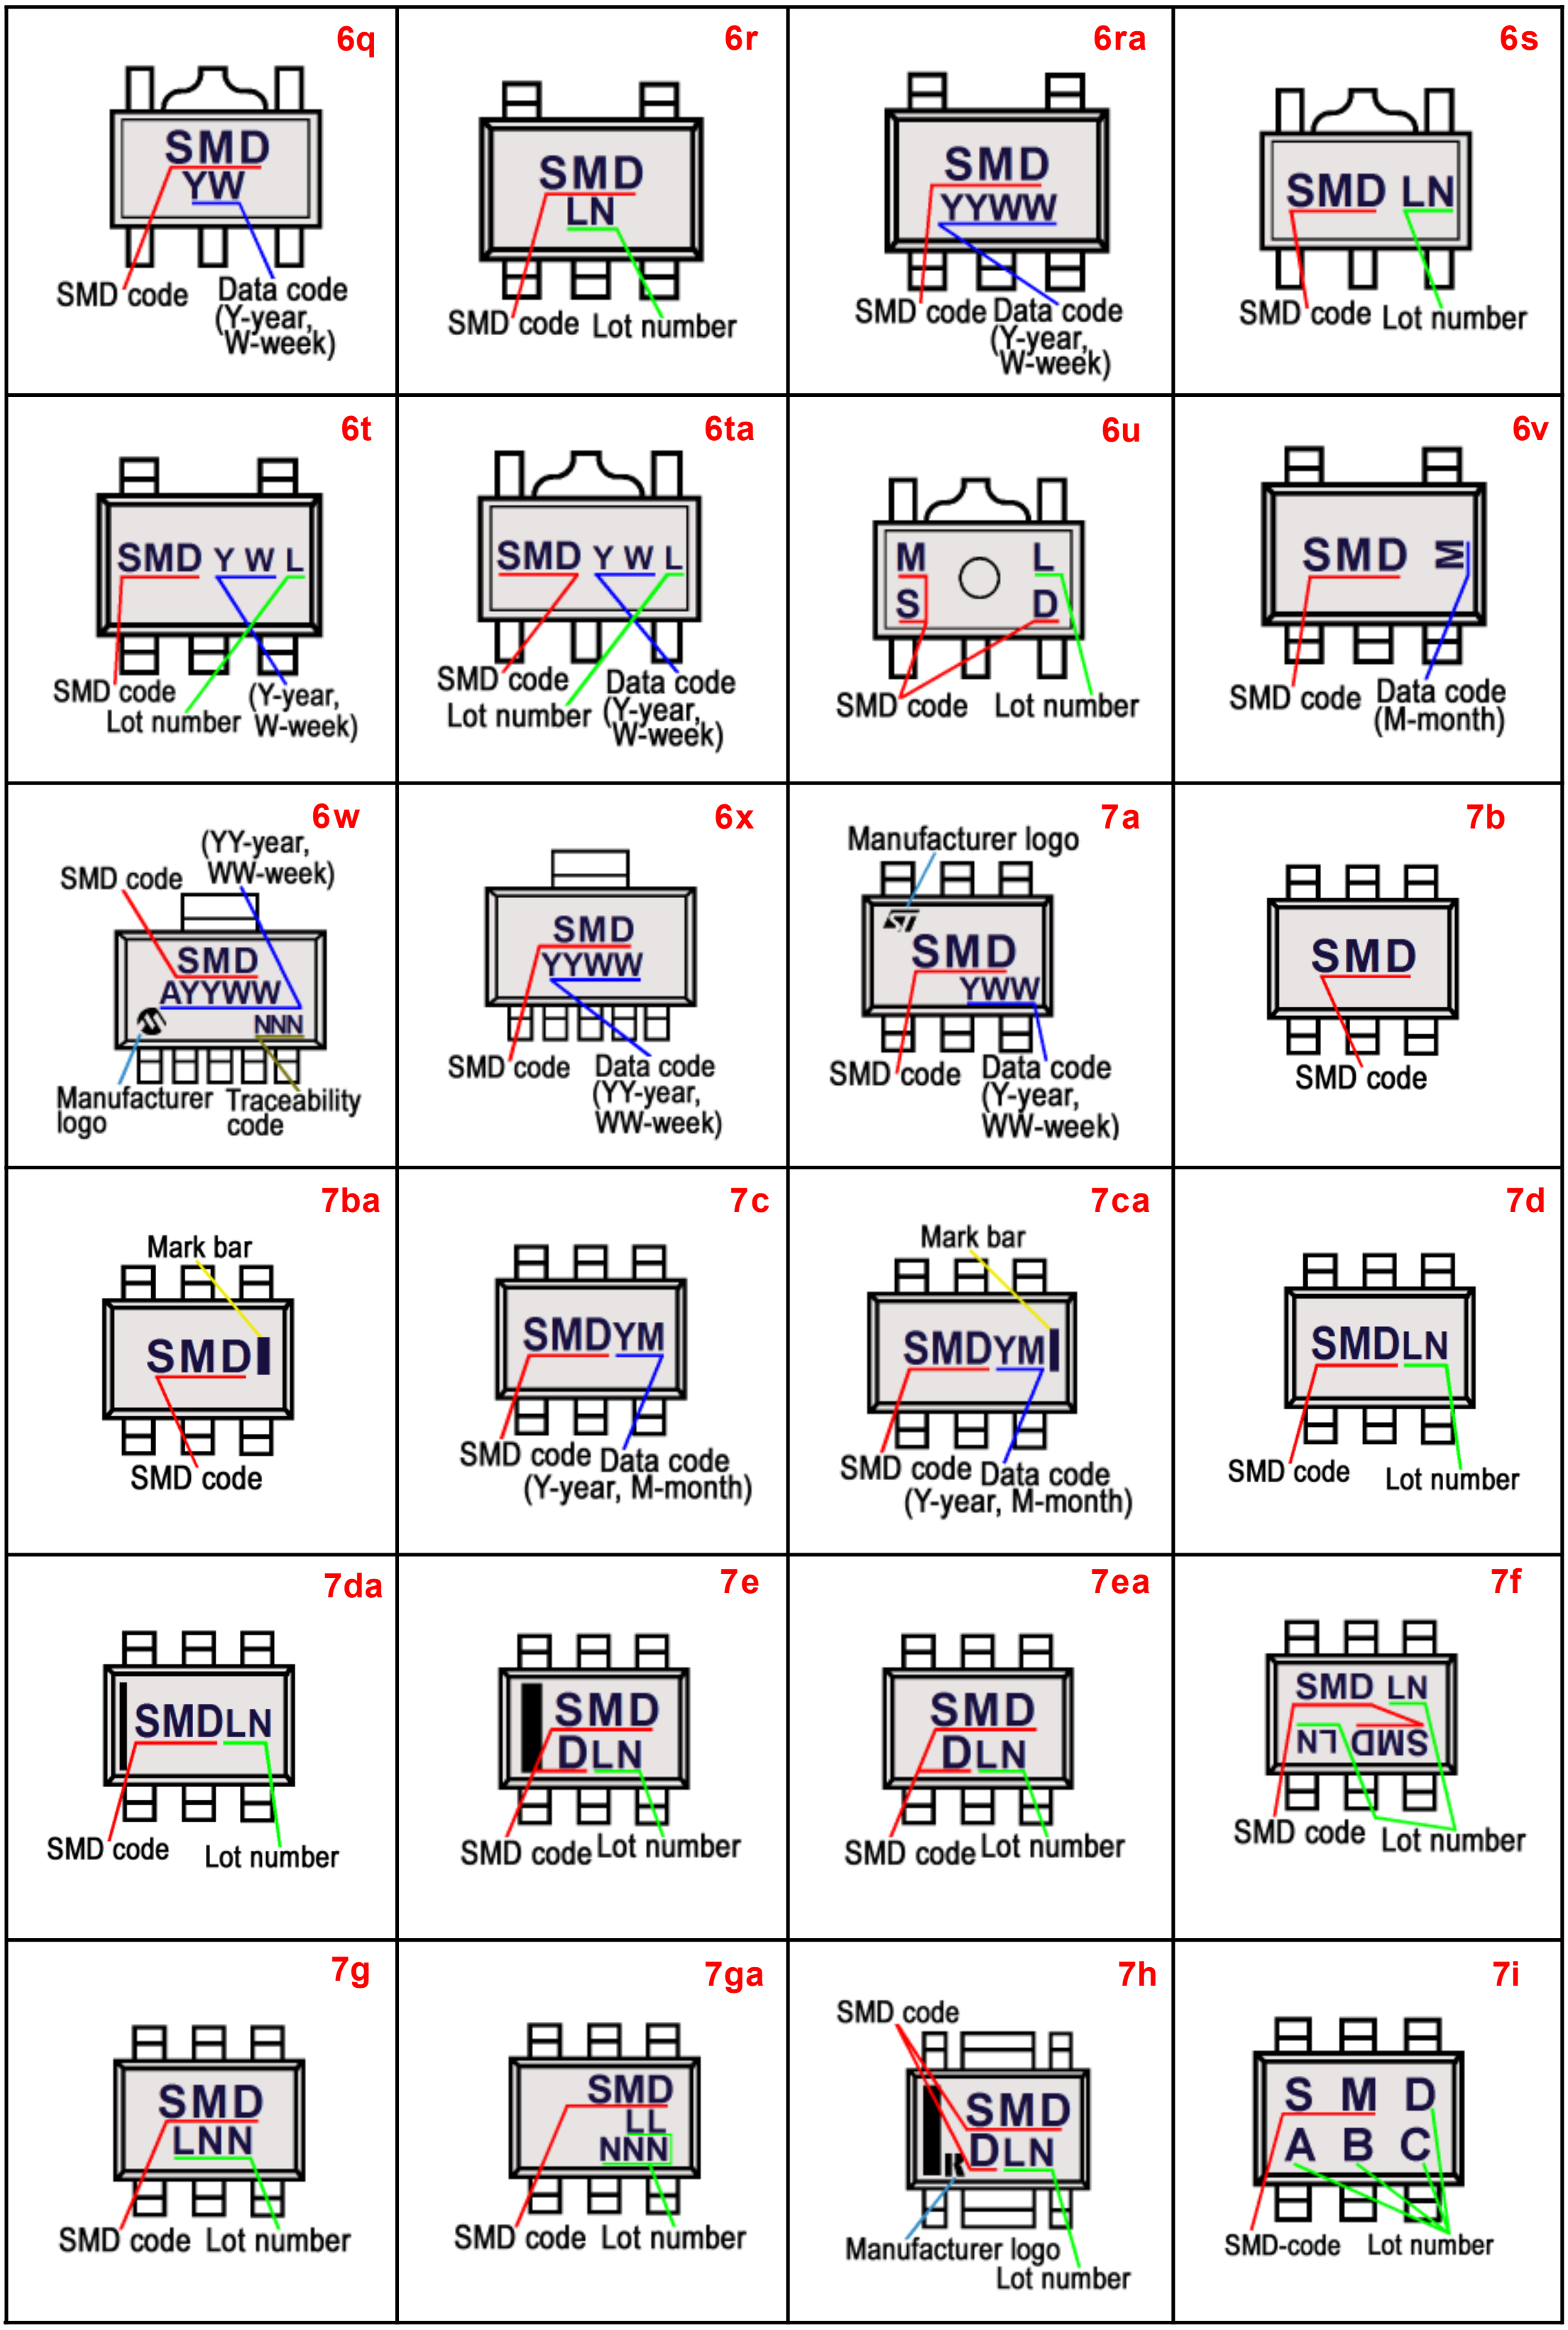
6q
SMD
YW
SMD code
Data code (Y-year, W-week)
6r
SMD
LN
SMD code
Lot number
6ra
SMD
YYWW
SMD code
Data code (Y-year, W-week)
6s
SMD LN
SMD code
Lot number
6t
SMD Y W L
SMD code
Lot number
(Y-year, W-week)
6ta
SMD Y W L
SMD code
Lot number
Data code (Y-year, W-week)
6u
M L
S D
SMD code
Lot number
6v
SMD M
SMD code
Data code (M-month)
6w
SMD code
(YY-year, WW-week)
SMD
AYYWW
NNN
Manufacturer logo
Traceability code
6x
SMD
YYWW
SMD code
Data code (YY-year, WW-week)
7a
Manufacturer logo
SMD
YWW
SMD code
Data code (Y-year, WW-week)
7b
SMD
SMD code
7ba
Mark bar
SMD
SMD code
7c
SMDYM
SMD code
Data code (Y-year, M-month)
7ca
Mark bar
SMDYM
SMD code
Data code (Y-year, M-month)
7d
SMDLN
SMD code
Lot number
7da
SMDLN
SMD code
Lot number
7e
SMD
DLN
SMD code
Lot number
7ea
SMD
DLN
SMD code
Lot number
7f
SMD LN
SMD code
Lot number
7g
SMD
LNN
SMD code
Lot number
7ga
SMD
LL
NNN
SMD code
Lot number
7h
SMD code
SMD
DLN
Manufacturer logo
Lot number
7i
S M D
A B C
SMD-code
Lot number

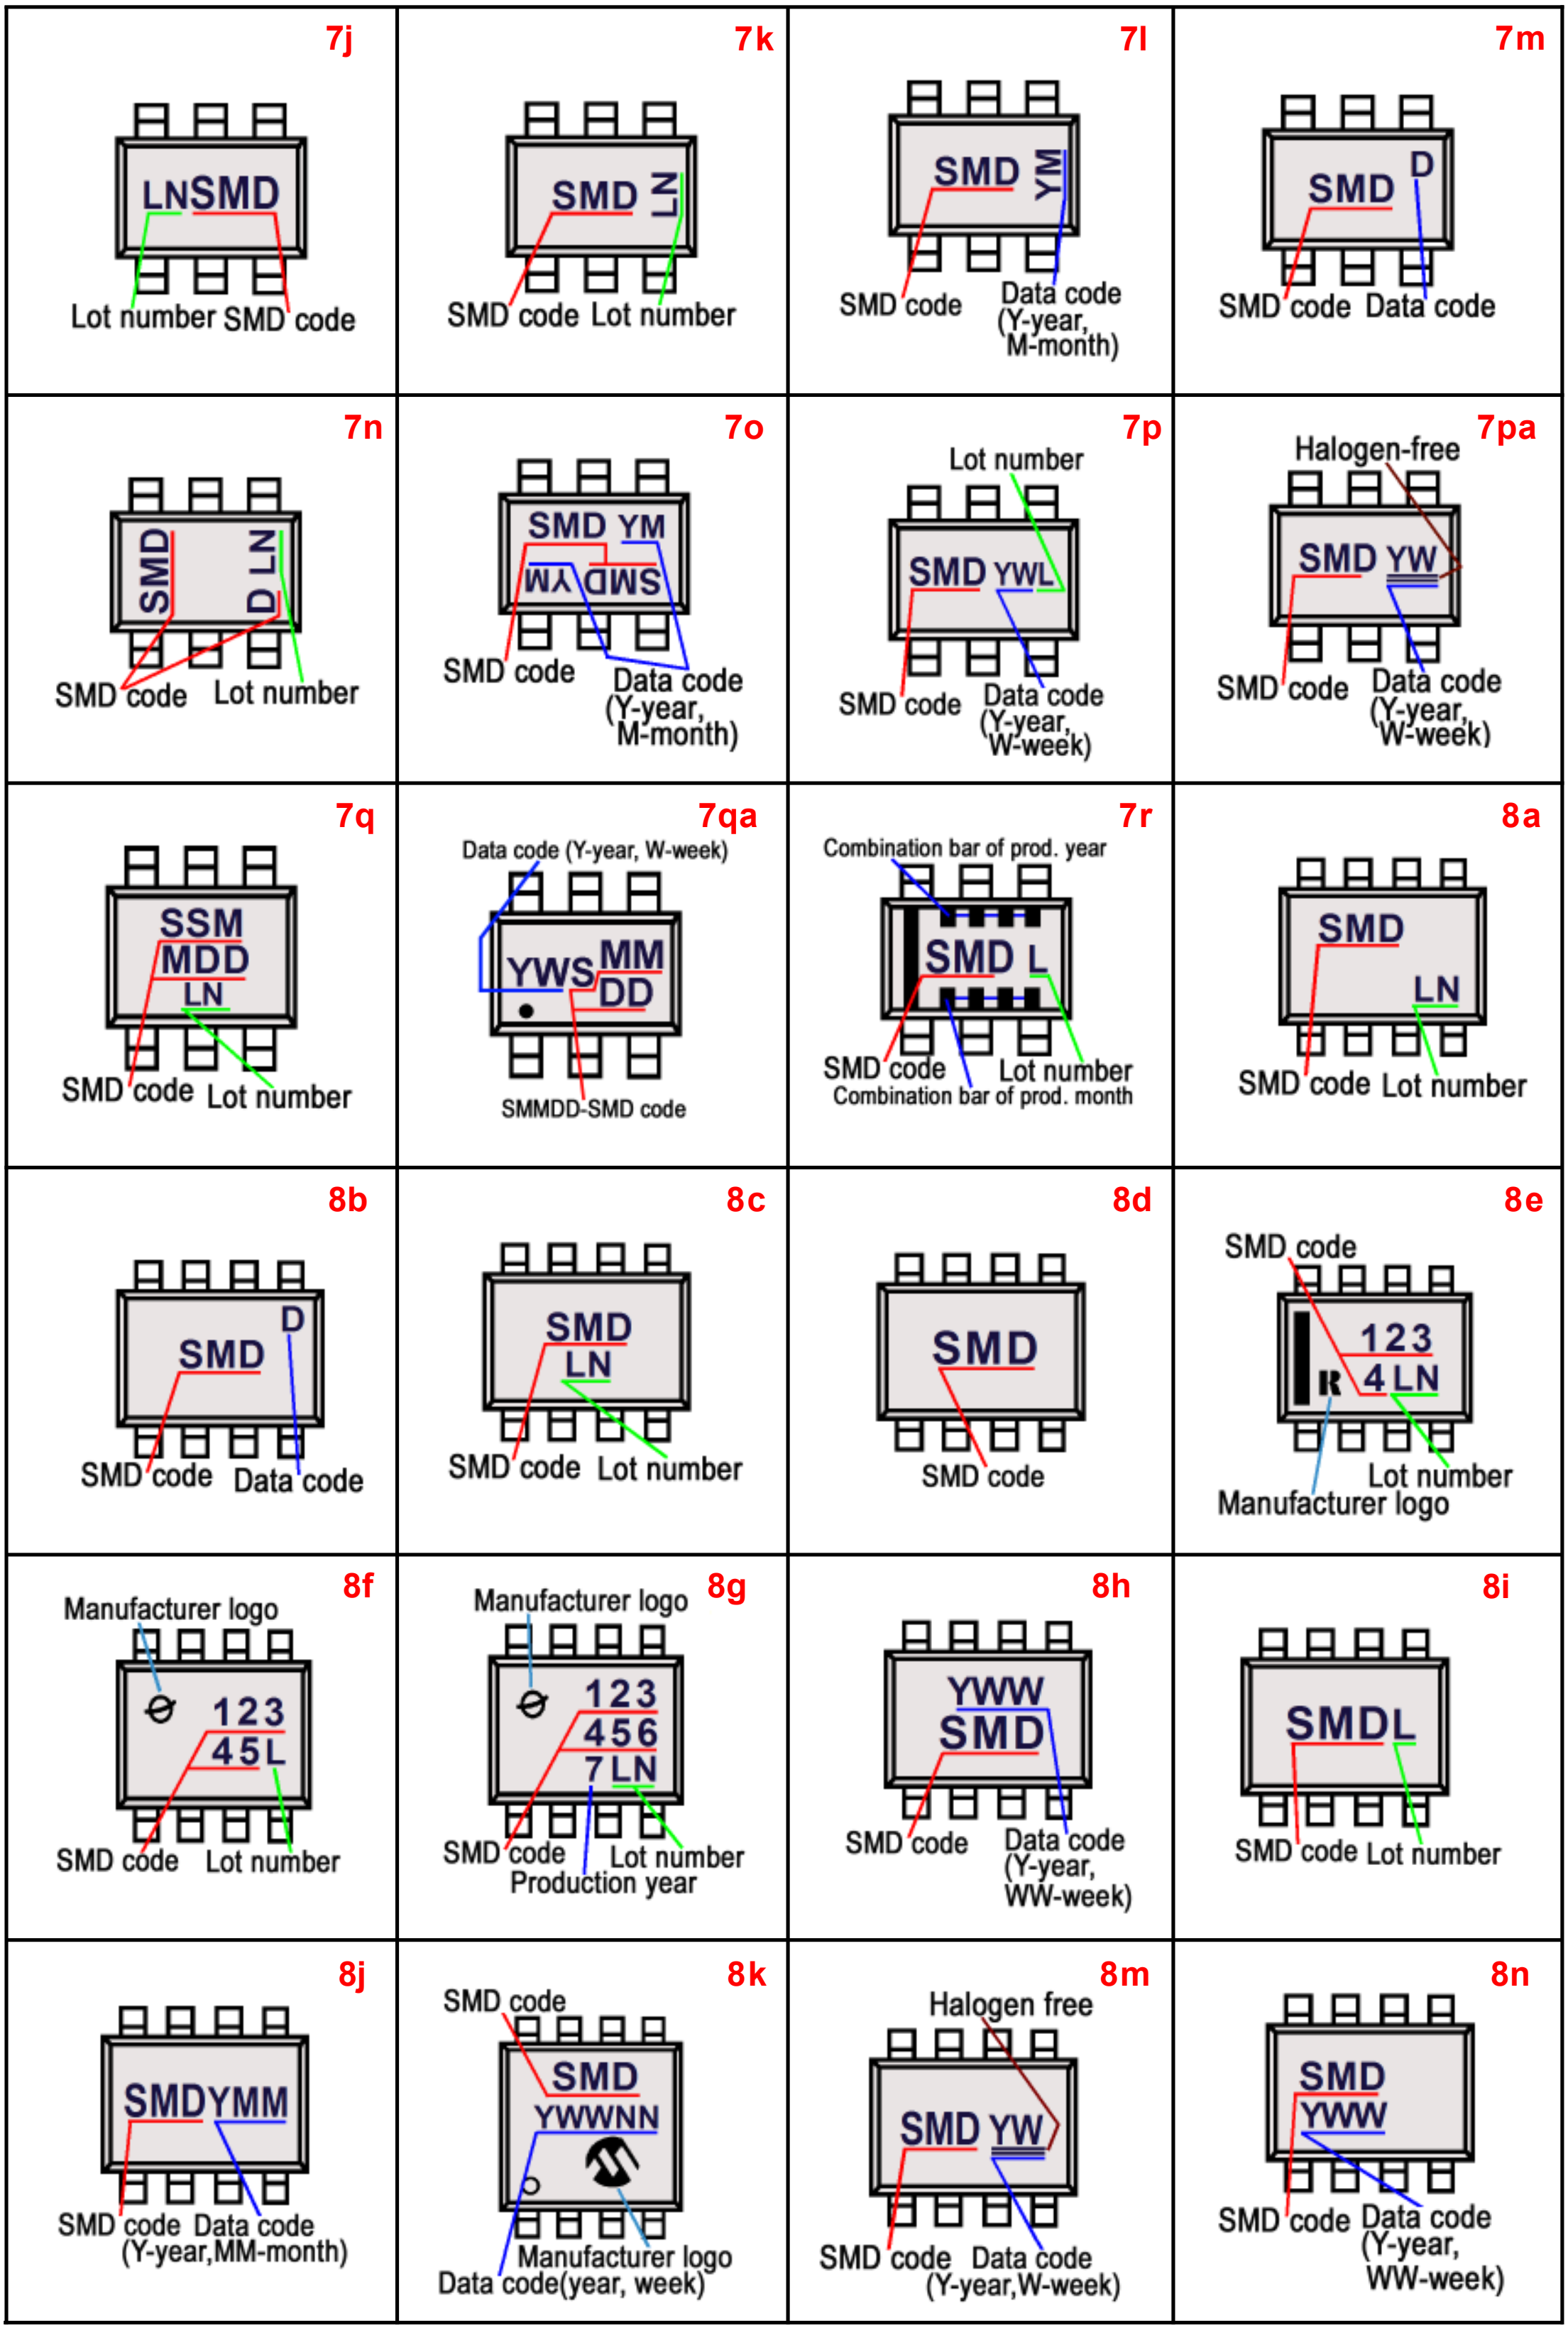
7j
LNSMD
Lot number SMD code
7k
SMD LN
SMD code Lot number
7l
SMD YM
SMD code
Data code (Y-year, M-month)
7m
SMD D
SMD code Data code
7n
SMD D LN
SMD code Lot number
7o
SMD YM
SMD YM
SMD code
Data code (Y-year, M-month)
7p
Lot number
SMD YWL
SMD code
Data code (Y-year, W-week)
7pa
Halogen-free
SMD YW
SMD code
Data code (Y-year, W-week)
7q
SSM
MDD
LN
SMD code Lot number
7qa
Data code (Y-year, W-week)
YWS MM
DD
SMMDD-SMD code
7r
Combination bar of prod. year
SMD L
SMD code Lot number
Combination bar of prod. month
8a
SMD
LN
SMD code Lot number
8b
SMD D
SMD code Data code
8c
SMD
LN
SMD code Lot number
8d
SMD
SMD code
8e
SMD code
123
4 LN
Lot number
Manufacturer logo
8f
Manufacturer logo
123
45L
SMD code Lot number
8g
Manufacturer logo
123
456
7 LN
SMD code Lot number
Production year
8h
YWW
SMD
SMD code
Data code (Y-year, WW-week)
8i
SMDL
SMD code Lot number
8j
SMDYMM
SMD code Data code
(Y-year,MM-month)
8k
SMD code
SMD
YWWNN
Manufacturer logo
Data code(year, week)
8m
Halogen free
SMD YW
SMD code Data code
(Y-year,W-week)
8n
SMD
YWW
SMD code Data code
(Y-year, WW-week)

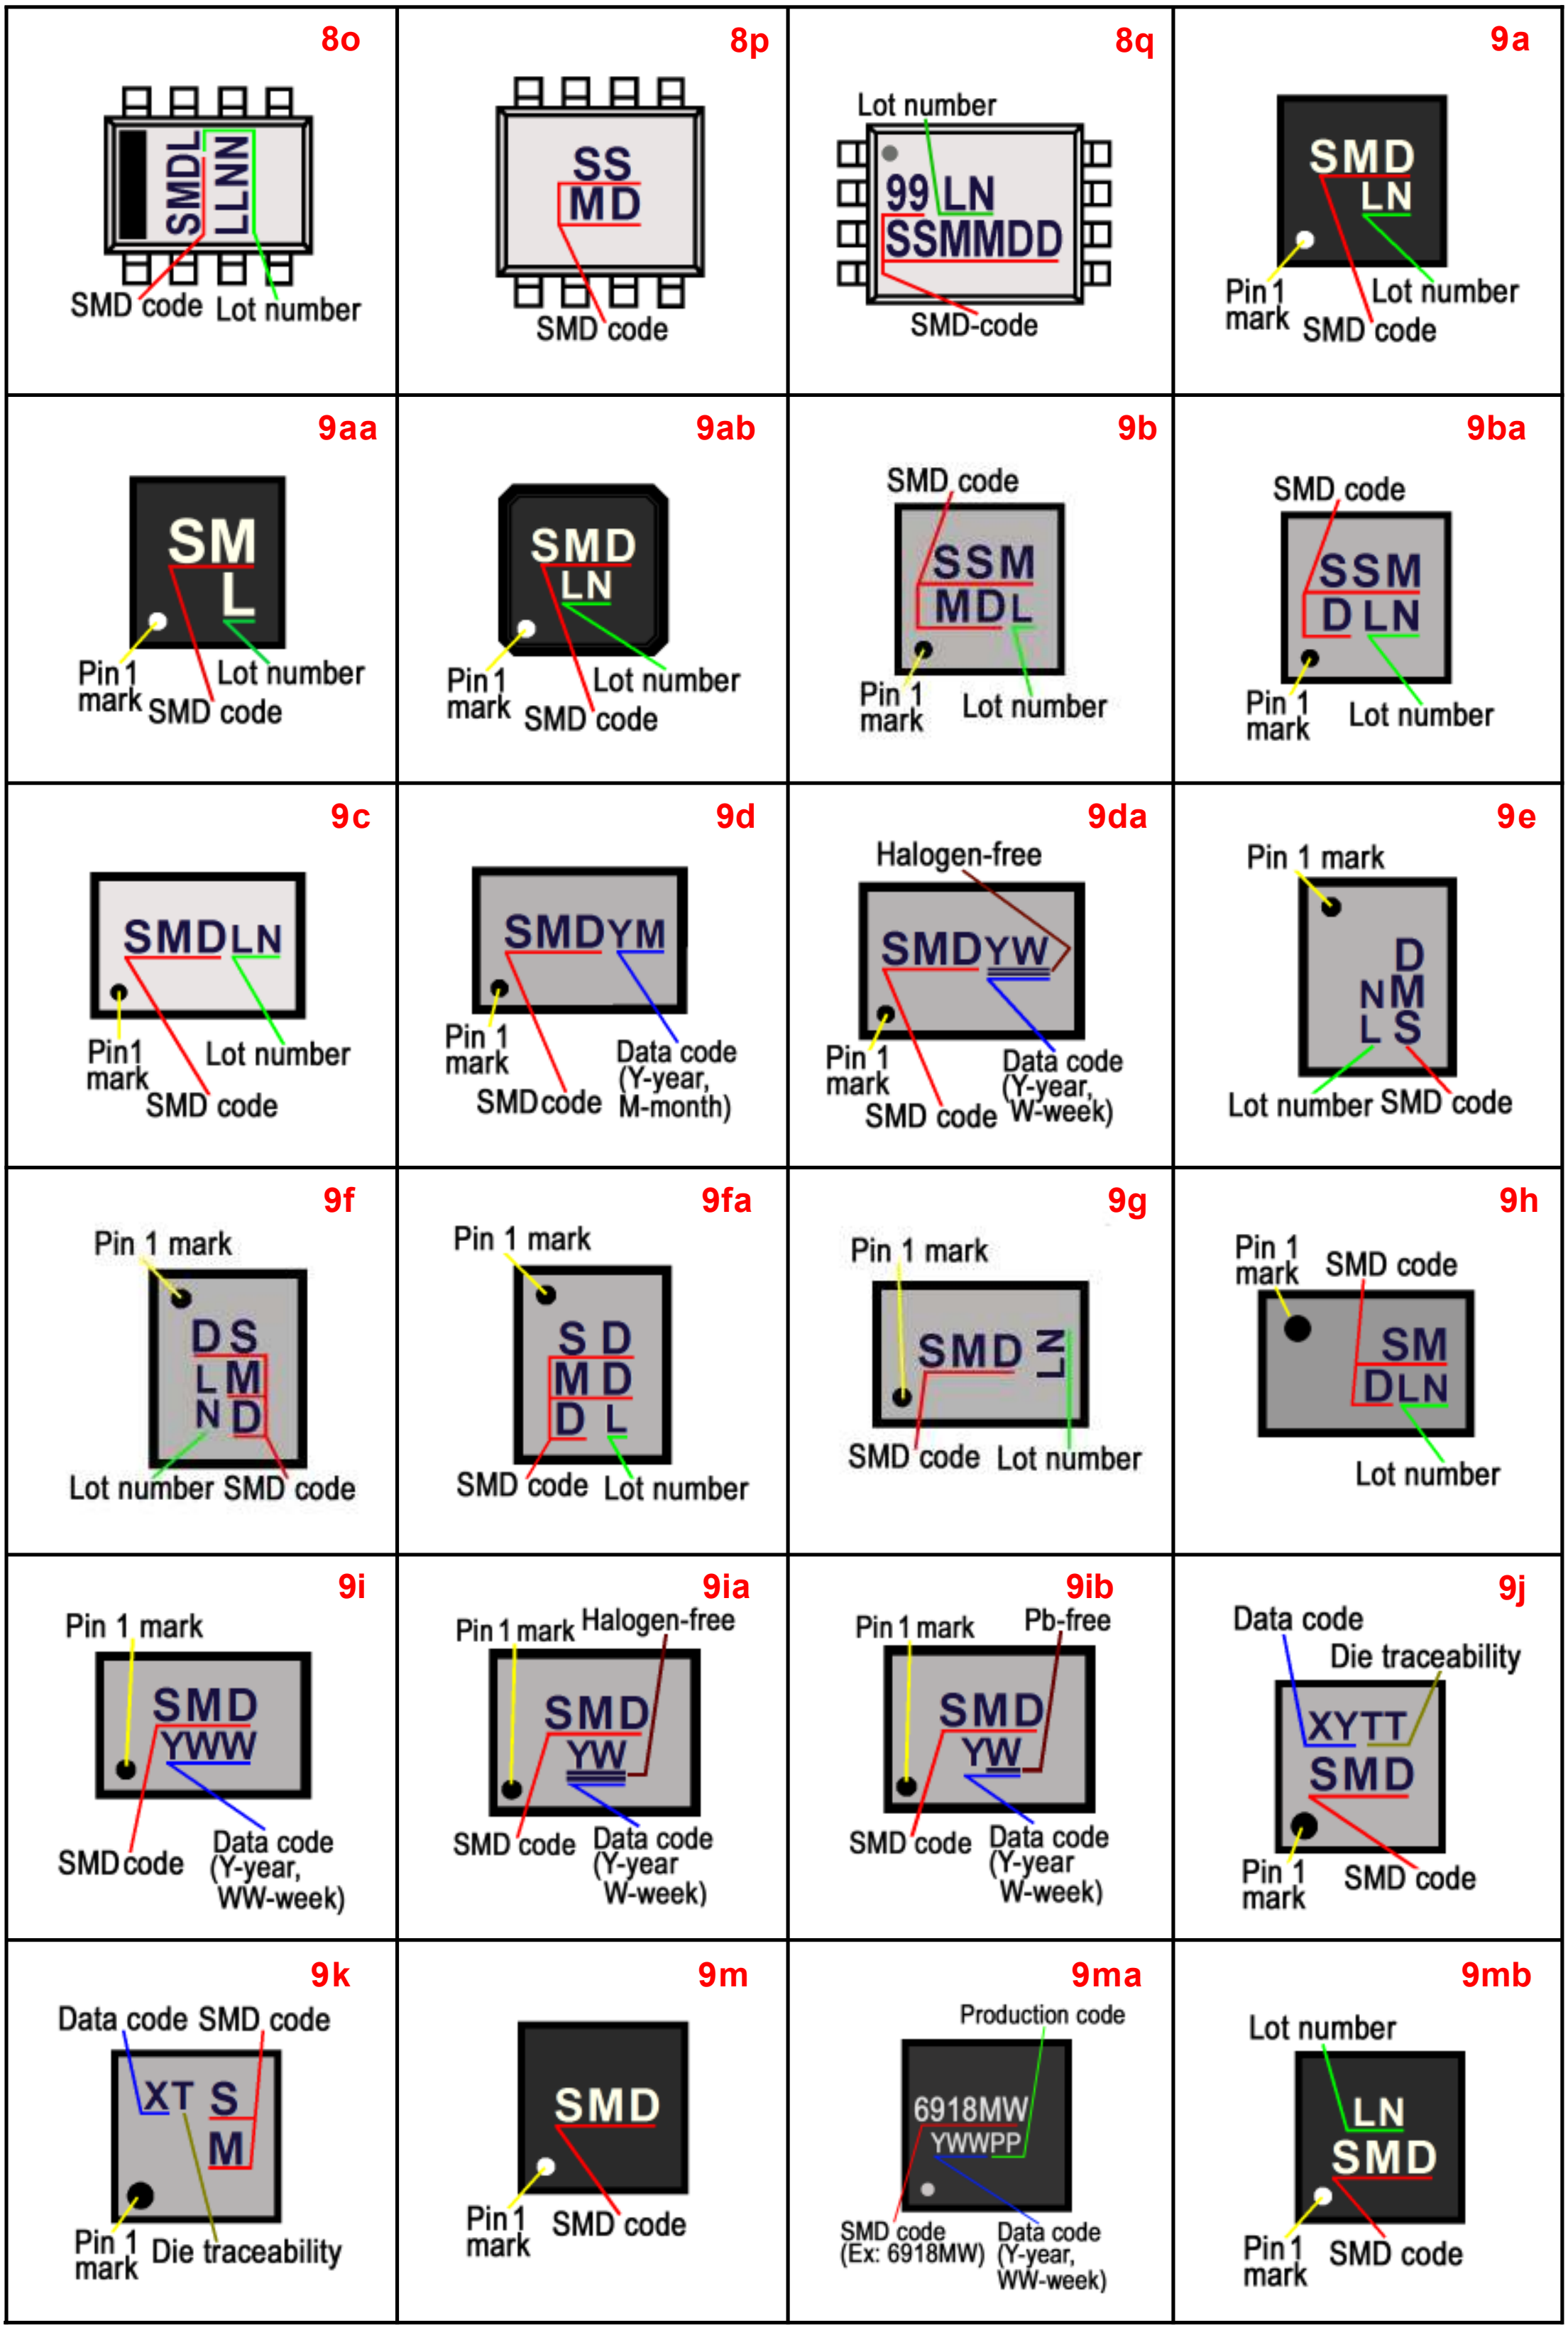
8o
SMDL
LLNN
SMD code
Lot number
8p
SS
MD
SMD code
8q
Lot number
99 LN
SSMMDD
SMD-code
9a
SMD
LN
Pin 1 mark
Lot number
SMD code
9aa
SM
L
Pin 1 mark
Lot number
SMD code
9ab
SMD
LN
Pin 1 mark
Lot number
SMD code
9b
SMD code
SSM
MDL
Pin 1 mark
Lot number
9ba
SMD code
SSM
D LN
Pin 1 mark
Lot number
9c
SMDLN
Pin1 mark
Lot number
SMD code
9d
SMDYM
Pin 1 mark
Data code (Y-year, M-month)
SMD code
9da
Halogen-free
SMDYW
Pin 1 mark
Data code (Y-year, W-week)
SMD code
9e
Pin 1 mark
D
NM
L S
Lot number
SMD code
9f
Pin 1 mark
DS
LM
ND
Lot number
SMD code
9fa
Pin 1 mark
S D
M D
D L
SMD code
Lot number
9g
Pin 1 mark
SMD LN
SMD code
Lot number
9h
Pin 1 mark
SMD code
SM
DLN
Lot number
9i
Pin 1 mark
SMD
YWW
SMD code
Data code (Y-year, WW-week)
9ia
Pin 1 mark
Halogen-free
SMD
YW
SMD code
Data code (Y-year W-week)
9ib
Pin 1 mark
Pb-free
SMD
YW
SMD code
Data code (Y-year W-week)
9j
Data code
Die traceability
XYTT
SMD
Pin 1 mark
SMD code
9k
Data code
SMD code
XT S
M
Pin 1 mark
Die traceability
9m
SMD
Pin 1 mark
SMD code
9ma
Production code
6918MW
YWWPP
SMD code (Ex: 6918MW)
Data code (Y-year, WW-week)
9mb
Lot number
LN
SMD
Pin 1 mark
SMD code

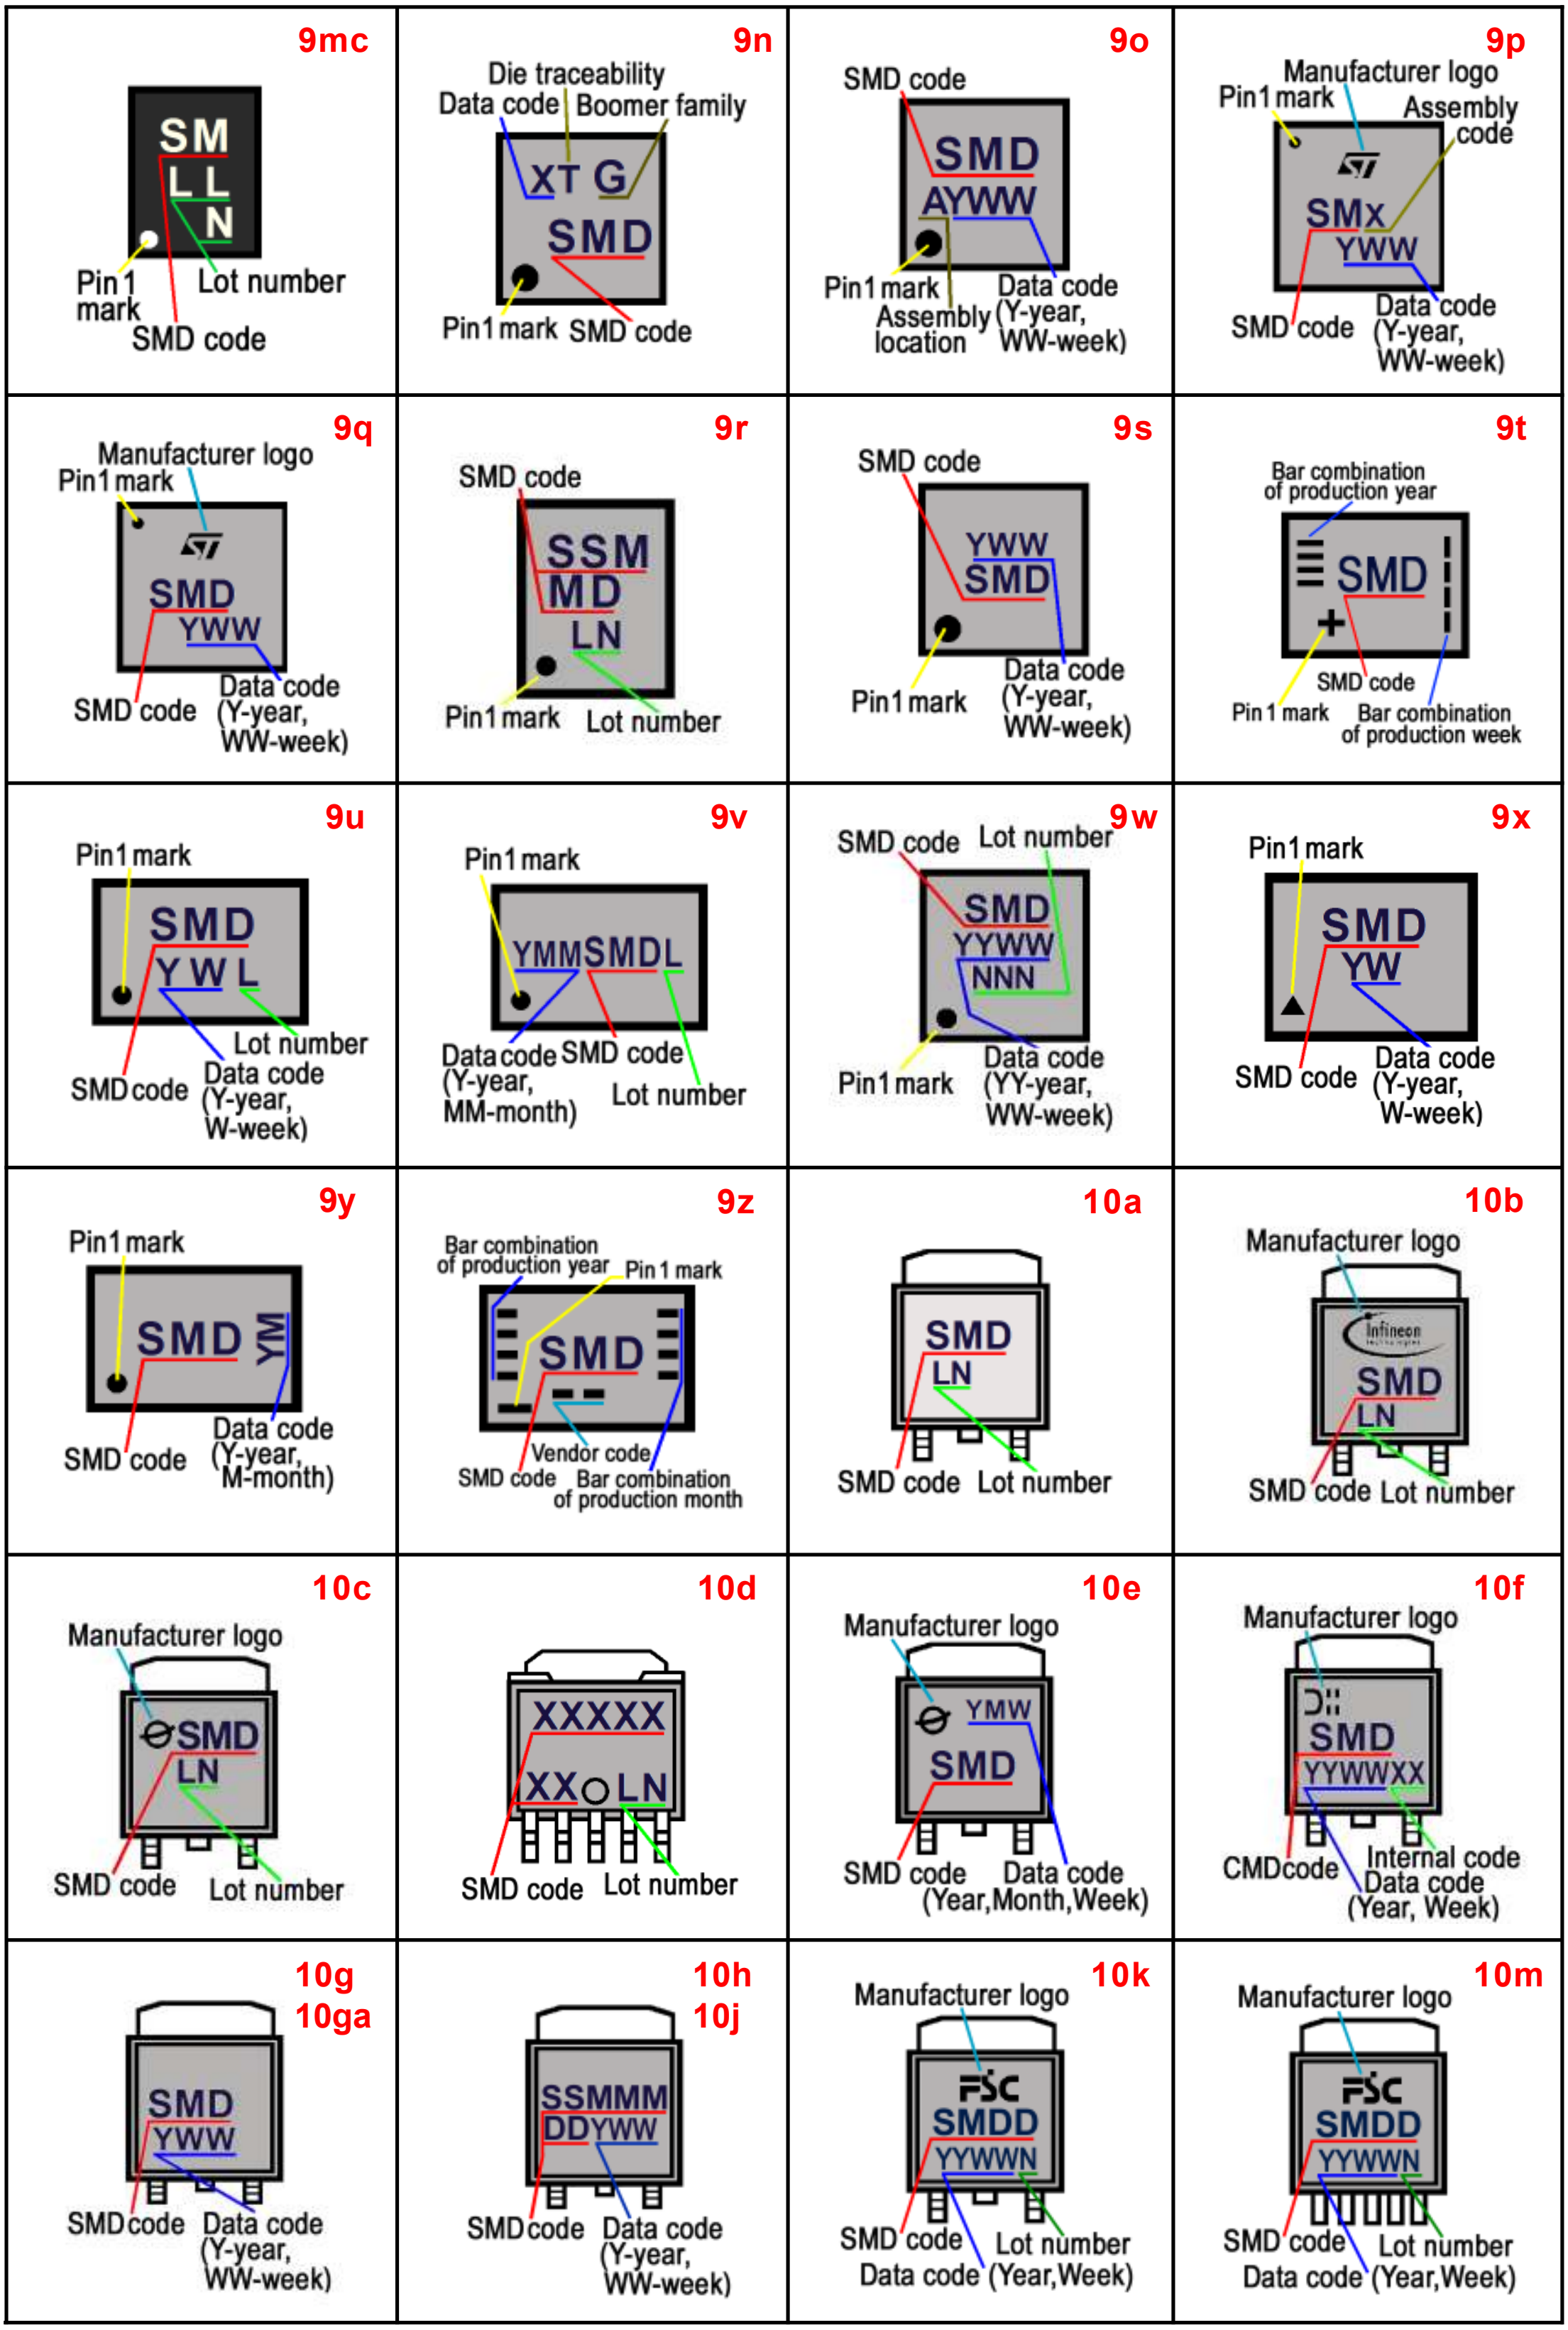
9mc
SM
L L
N
Pin 1 mark
Lot number
SMD code
9n
Die traceability
Data code
Boomer family
XT G
SMD
Pin1 mark
SMD code
9o
SMD code
SMD
AYWW
Pin1 mark
Assembly location
Data code (Y-year, WW-week)
9p
Manufacturer logo
Pin1 mark
Assembly code
SMx
YWW
SMD code
Data code (Y-year, WW-week)
9q
Manufacturer logo
Pin1 mark
SMD
YWW
SMD code
Data code (Y-year, WW-week)
9r
SMD code
SSM
MD
LN
Pin1 mark
Lot number
9s
SMD code
YWW
SMD
Pin1 mark
Data code (Y-year, WW-week)
9t
Bar combination of production year
SMD
SMD code
Pin 1 mark
Bar combination of production week
9u
Pin1 mark
SMD
Y W L
Lot number
SMD code
Data code (Y-year, W-week)
9v
Pin1 mark
YMMSMDL
Data code (Y-year, MM-month)
SMD code
Lot number
9w
SMD code
Lot number
SMD
YYWW
NNN
Pin1 mark
Data code (YY-year, WW-week)
9x
Pin1 mark
SMD
YW
SMD code
Data code (Y-year, W-week)
9y
Pin1 mark
SMD
YM
SMD code
Data code (Y-year, M-month)
9z
Bar combination of production year
Pin 1 mark
SMD
Vendor code
SMD code
Bar combination of production month
10a
SMD
LN
SMD code
Lot number
10b
Manufacturer logo
SMD
LN
SMD code
Lot number
10c
Manufacturer logo
SMD
LN
SMD code
Lot number
10d
XXXXX
XX LN
SMD code
Lot number
10e
Manufacturer logo
YMW
SMD
SMD code
Data code (Year,Month,Week)
10f
Manufacturer logo
SMD
YYWWXX
CMD code
Internal code
Data code (Year, Week)
10g
10ga
SMD
YWW
SMD code
Data code (Y-year, WW-week)
10h
10j
SSMMM
DDYWW
SMD code
Data code (Y-year, WW-week)
10k
Manufacturer logo
FSC
SMDD
YYWWN
SMD code
Lot number
Data code (Year,Week)
10m
Manufacturer logo
FSC
SMDD
YYWWN
SMD code
Lot number
Data code (Year,Week)

SECTION 16
Sample schematic diagram



A1



A2



A3



AD1



AD2



AFP1



AFP2



AFP3



AFP4



AFP5



AFP6



AFP7



AFP8



AFP9

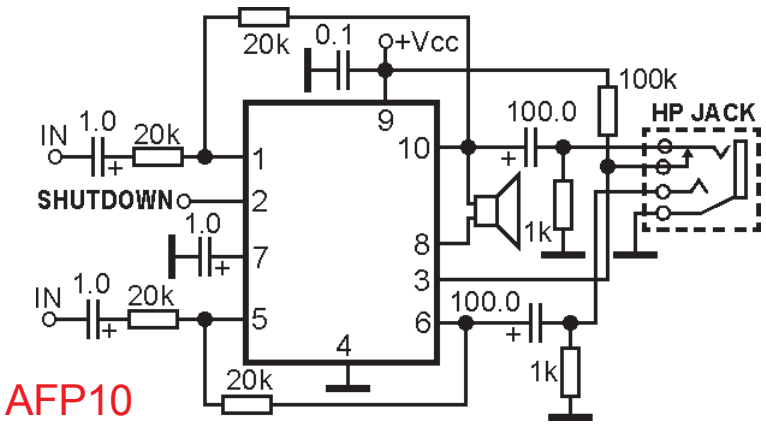

AFP10



AFP11



AFP12



AFP13



AFP14



AFP15



AFP16



AFP17



AFP18



AFP19



AFP20



AFP21



AFP22



AFP23



AFP24



AFP25



AFP26



AFP27



AFP28



AFP29



AFP30



AFP31



AFP32



AFP33



AFP34



AFP35



AFP36



AFP37



AFP38



AFP39



AFP40



AFP41

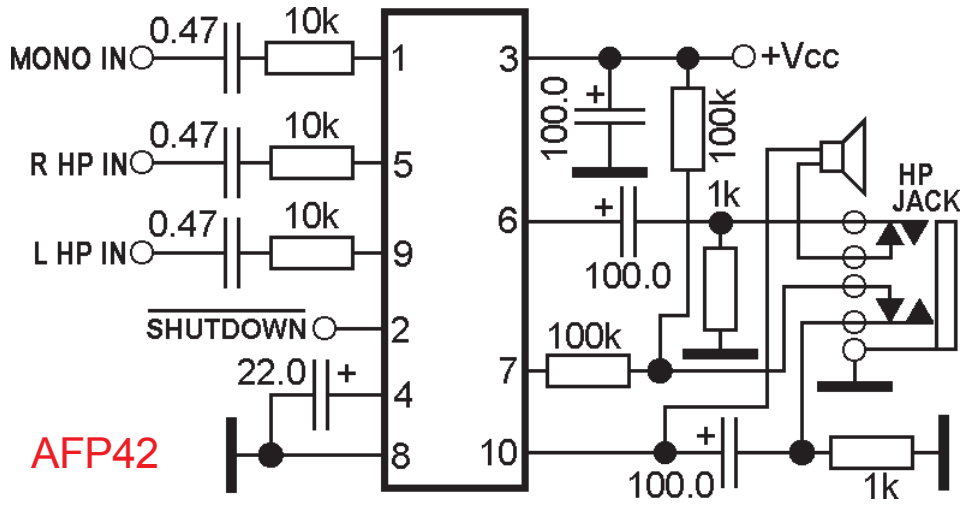

AFP42

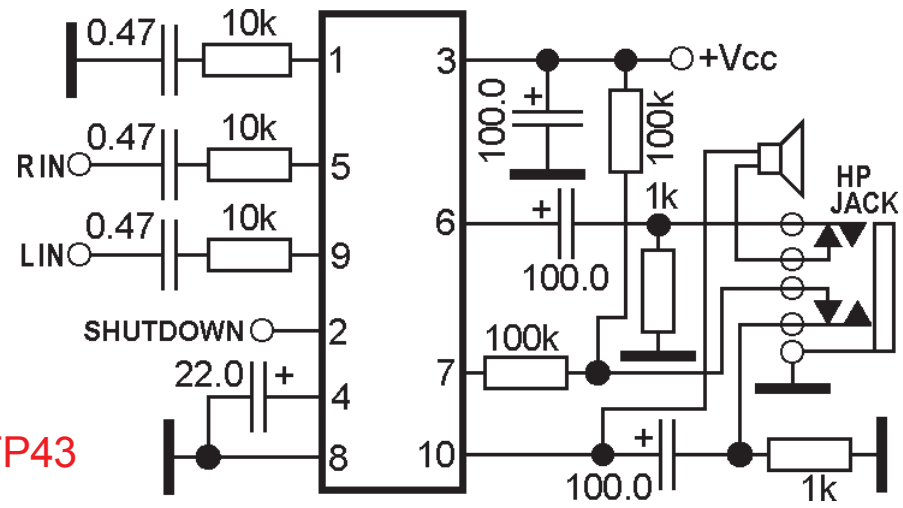

AFP43



AFP44



AFP45



AFP46



AFP47



AFP48



AFP49



AFP50



AFP51



AFP52



AFP53



AFP54



AFP55



AFP56



AFP57



AFP58



AFP59



AFP60



AFP61



AFP62



AFP63



AFP64


D1


D2


D3


Di4


D5


D6


D7


D8


D9


D10



D11



D12



D13



D14

D15





D16



D17



D18



D19

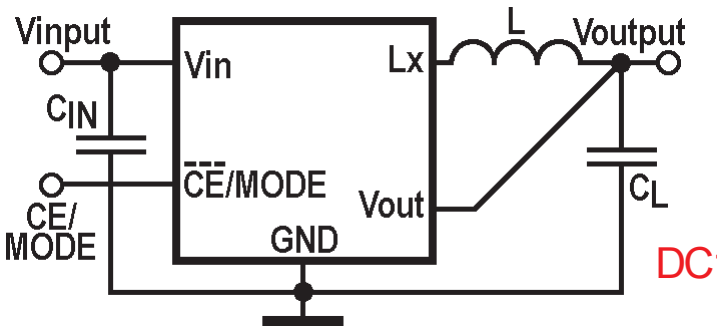

DC1



DC2



DC3



DC4



DC5



DC6



DC7



DC8



DC9



DC10



DC11



DC12



DC13



DC14

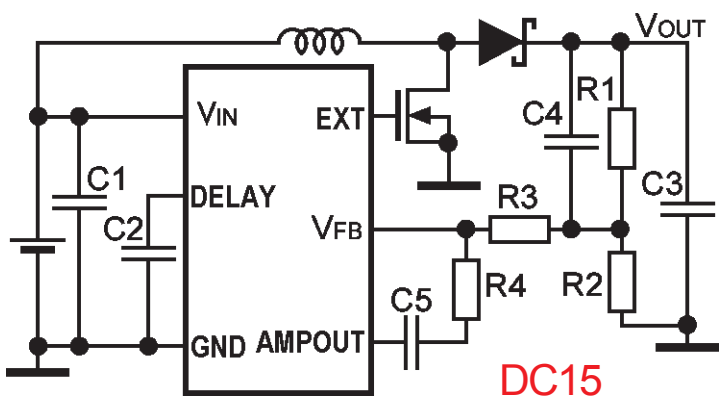

DC15

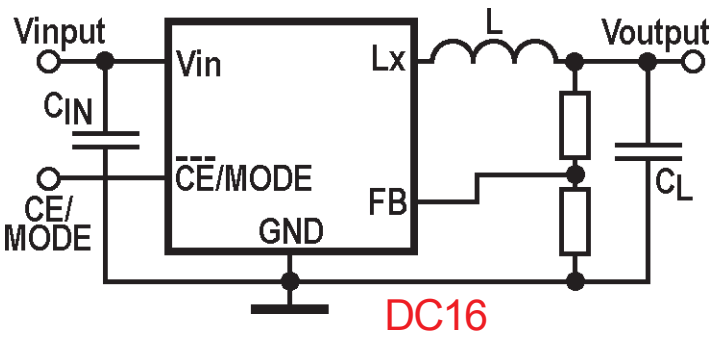

DC16

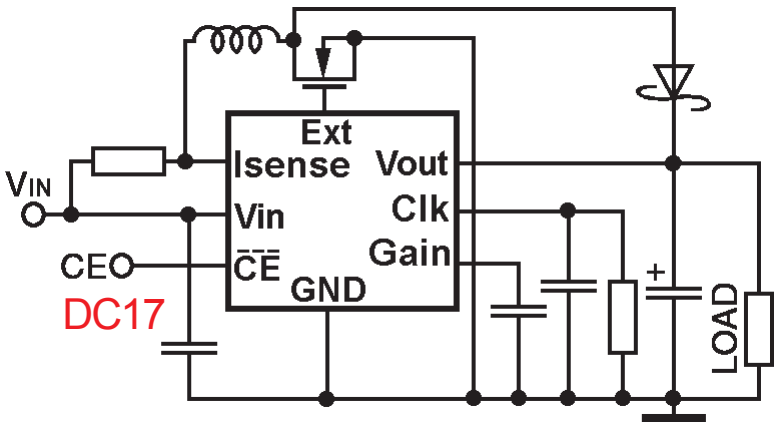

DC17



DC18



DC19



DC19a



DC20



DC21



DC22



DC23



DC24



LD1

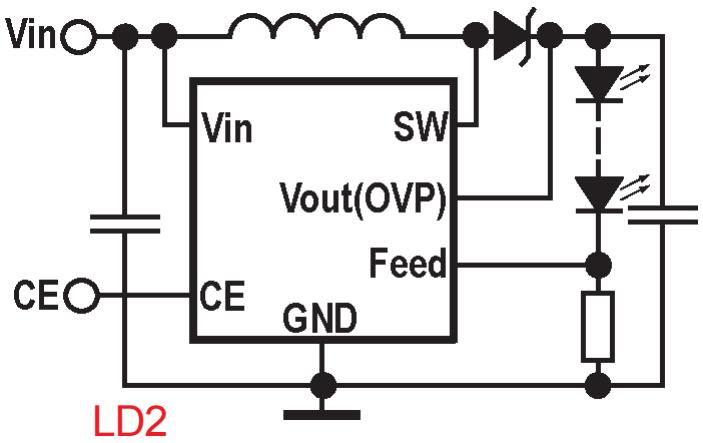

LD2

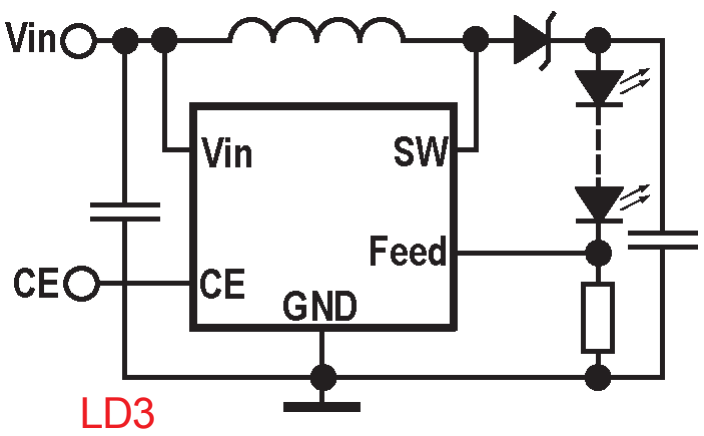

LD3



LD4



Log1



Log2



Log3



Log4



Log5



Log6



Log7



Log8



Log9



Log10



Log11



Log12



Log13



Log14



Log15



Log16



Log17



Log18



Log19



Log20



Log21



Log22



Log23



Log24



Log25



Log26



Log27



Log28



Log29



Log30



Log31



Log32



Log33



Log34



Log35



Log36



Log37



Log38



Log39



Log40



Log41



Log42



Log43



Log44



Log45



Log46



Log47



Log48



Log49



Log50



Log51



Log52



Log53



Log54



Log55



Log56



Log57



Log58



Log59



Log60



Log61



Log62



Log63



Log64



Log65



Log66



Log67



Log68



Log69



Log70



Log71



Log72



Log73



Log74



Log75



Log76



Log77



Log78



Log79



Log80



Log81



Log82



Log83



Log84



Log85



Log86



OP1



OP2



OP3



OP4



RF1



RF2



SW1



SW2

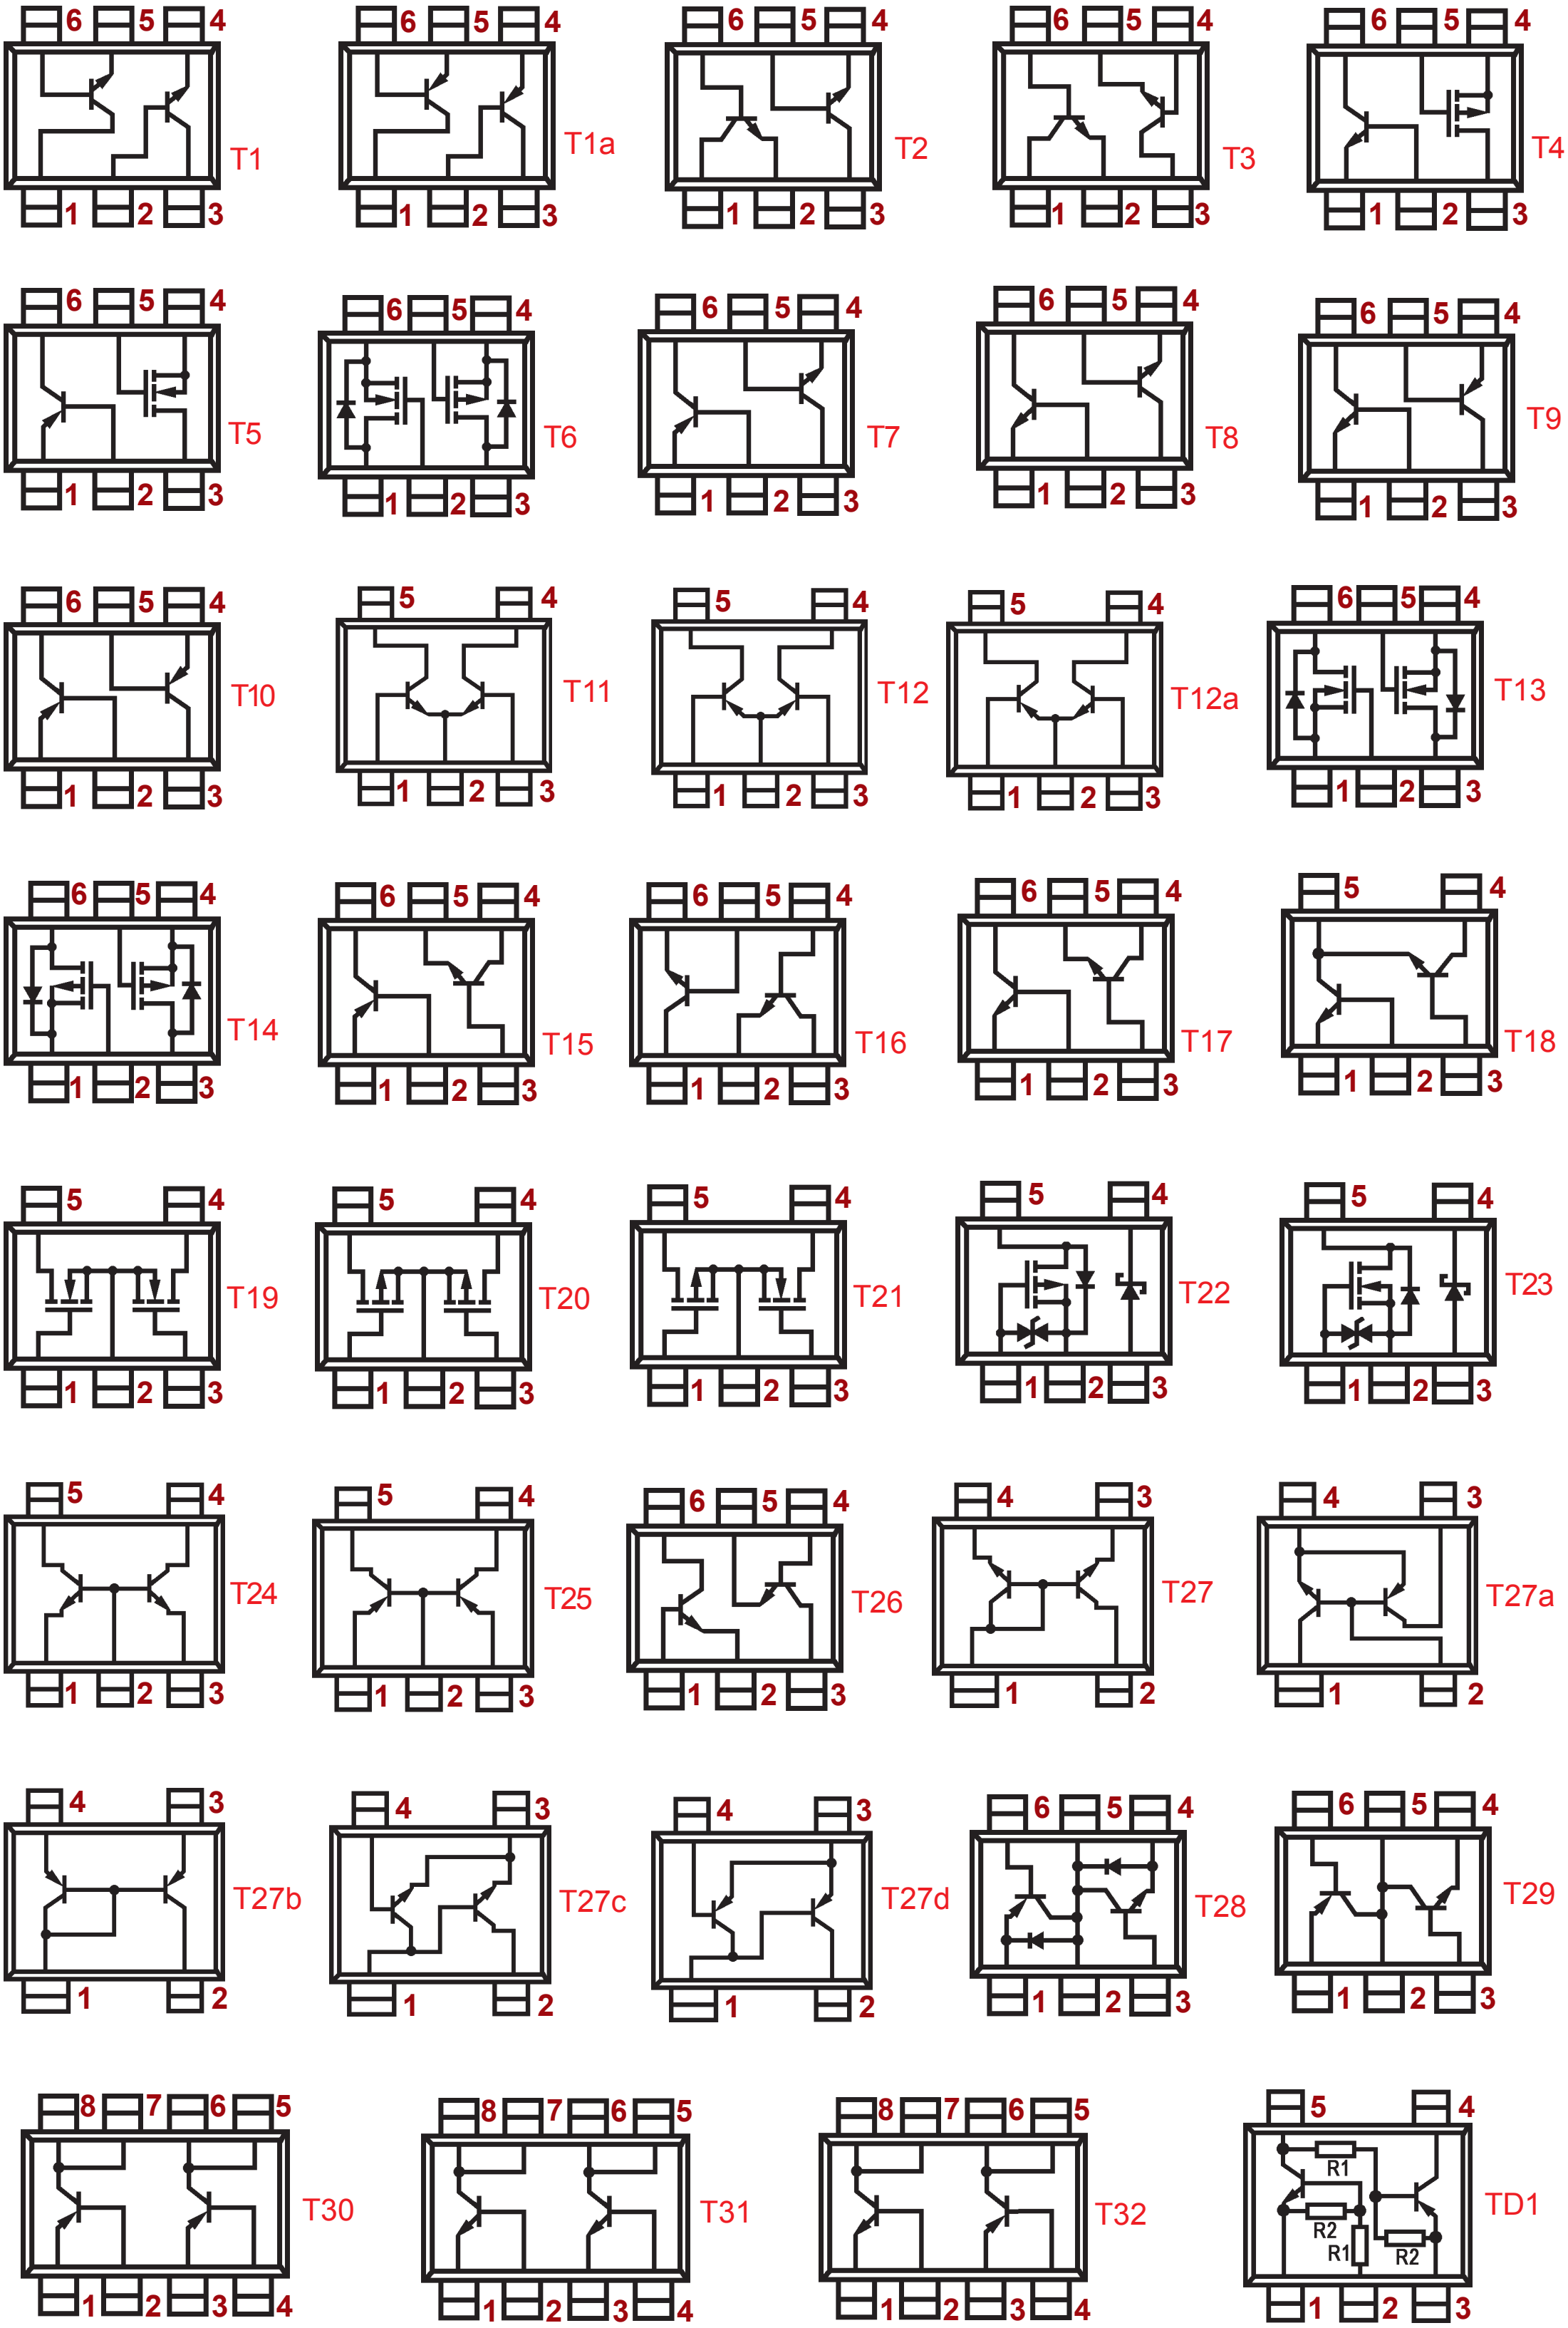
T1
T1a
T2
T3
T4
T5
T6
T7
T8
T9
T10
T11
T12
T12a
T13
T14
T15
T16
T17
T18
T19
T20
T21
T22
T23
T24
T25
T26
T27
T27a
T27b
T27c
T27d
T28
T29
T30
T31
T32
TD1
R1
R2

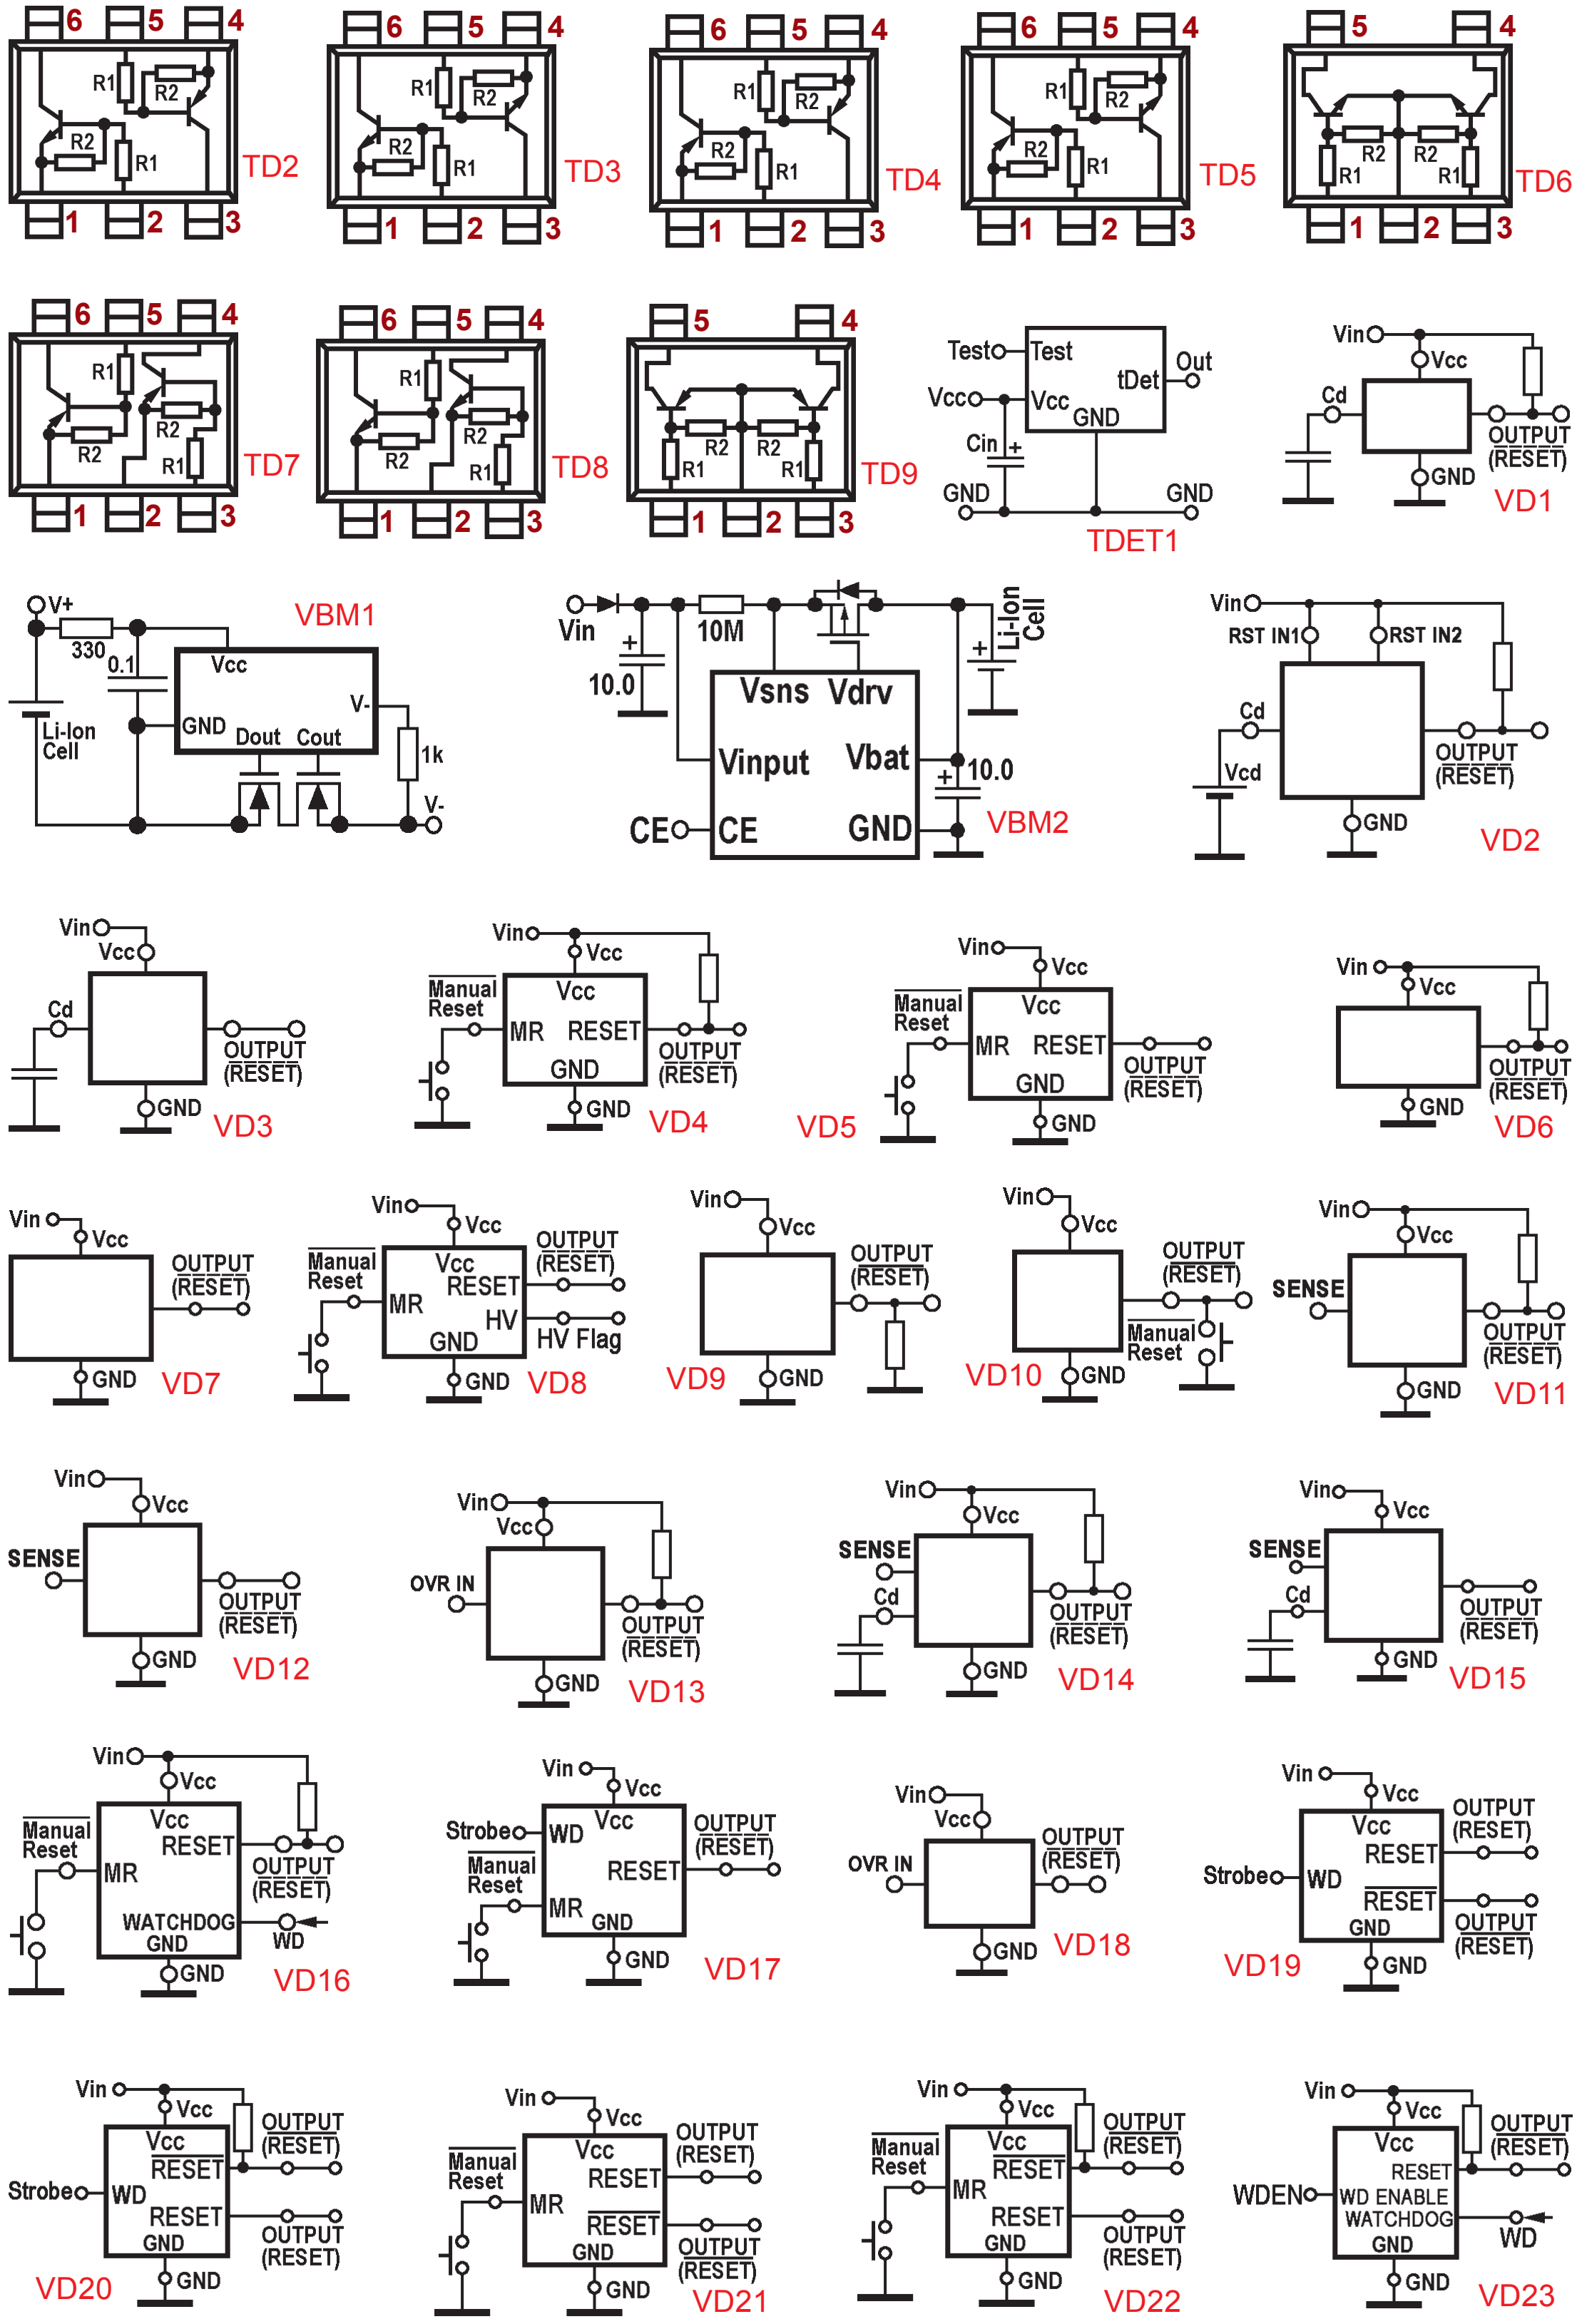
TD2
TD3
TD4
TD5
TD6
TD7
TD8
TD9
TDET1
VD1
VBM1
VBM2
VD2
VD3
VD4
VD5
VD6
VD7
VD8
VD9
VD10
VD11
VD12
VD13
VD14
VD15
VD16
VD17
VD18
VD19
VD20
VD21
VD22
VD23
R1
R2
Testo
Test
tDet
Out
Vcco
Vcc
GND
Cin
Vin
Cd
OUTPUT (RESET)
V+
330
0.1
Li-Ion Cell
Dout
Cout
V-
1k
10.0
10M
Vsns
Vdrv
Vinput
Vbat
CE
RST IN1
RST IN2
Vcd
Manual Reset
MR
RESET
HV
HV Flag
SENSE
OVR IN
WATCHDOG
WD
Strobe
WDEN
WD ENABLE

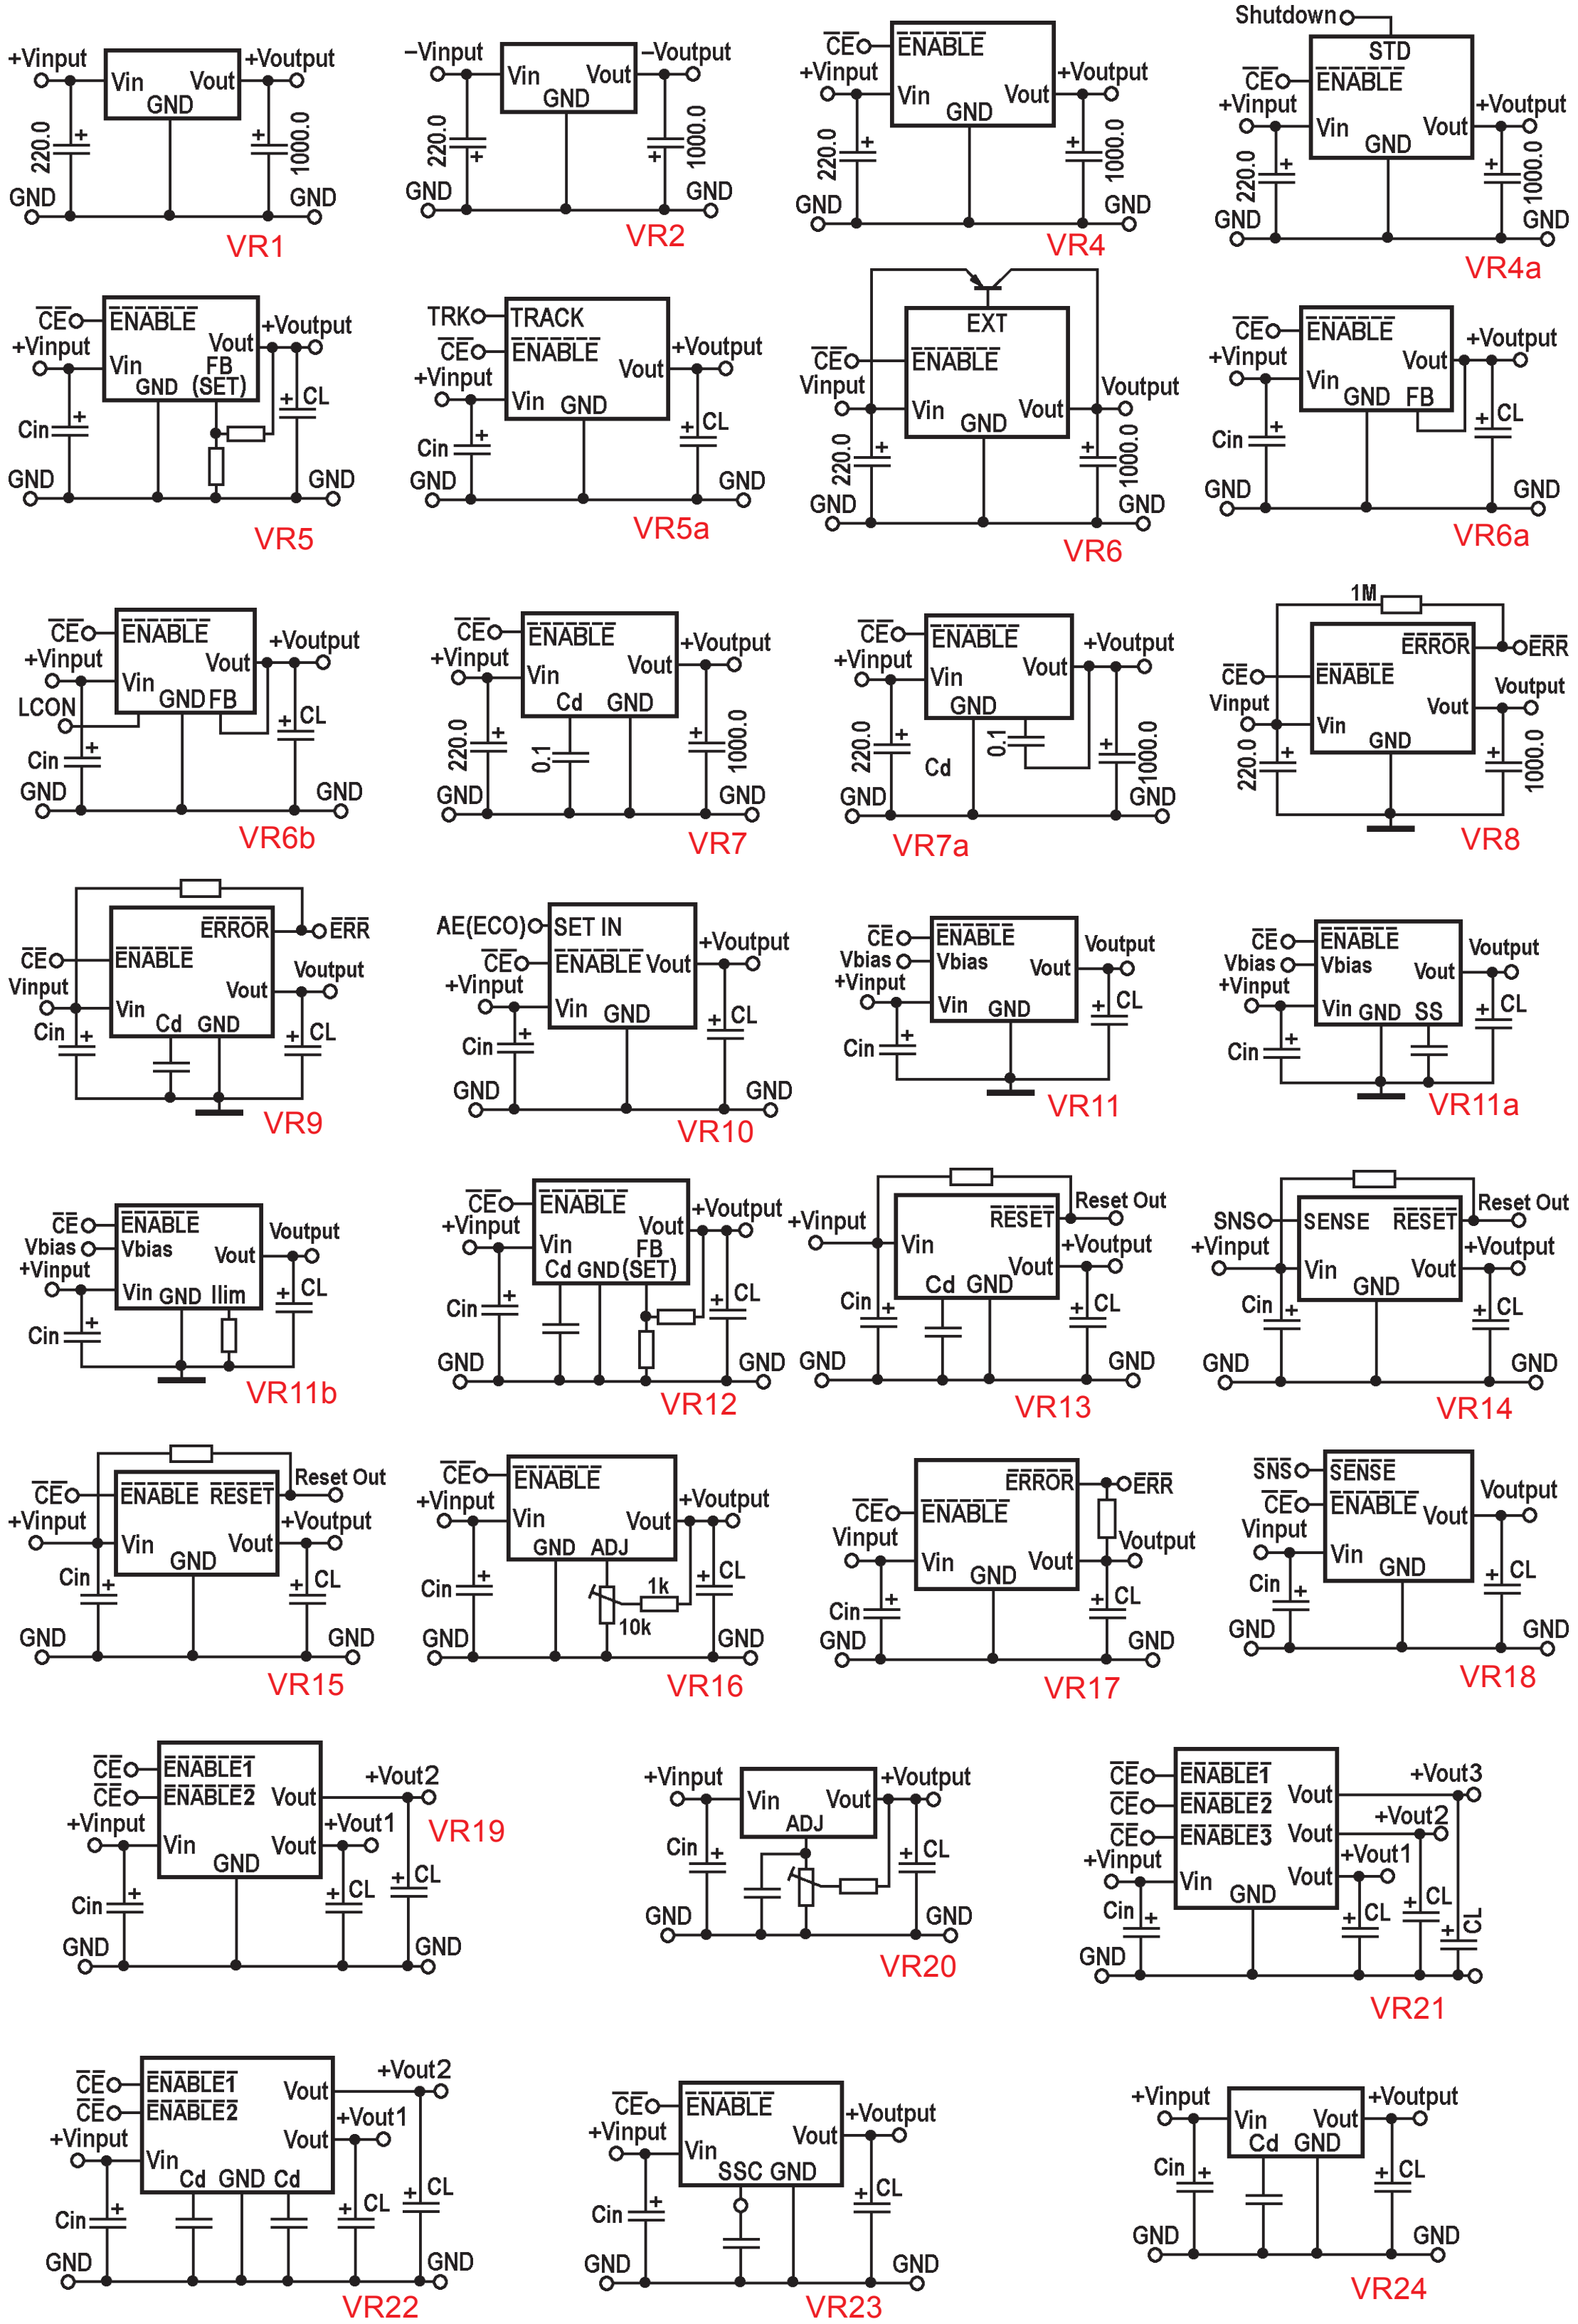
VR1
VR2
VR4
VR4a
VR5
VR5a
VR6
VR6a
VR6b
VR7
VR7a
VR8
VR9
VR10
VR11
VR11a
VR11b
VR12
VR13
VR14
VR15
VR16
VR17
VR18
VR19
VR20
VR21
VR22
VR23
VR24



VR25



VR26



VR27



VR28



VR29



VR30



VR31



VR32

SECTION17

Adittional SMD info

Besides SMD code manufacturers can place additional information such as internal production lot number, traceability code, data of production, assembly location etc. The adittional info is an arbitral position and arbitral content (depending of the manufacturer) and can be alphanumeris symbol (symbols) or graphic symbol.

Below we present some adittional info.

Lot number.

Manufacturer: Elm (ELM Technology Corporation):
Rules 1 (for ODO voltage detectors)
Symbol 1 - A to Z(I, O, X excepted)
Symbol 2 - 0 to 9
Rules 2 (for PPO voltage detectors)
Symbol 1 - 0 to 9
Symbol 2 - A to Z(I, O, X excepted)

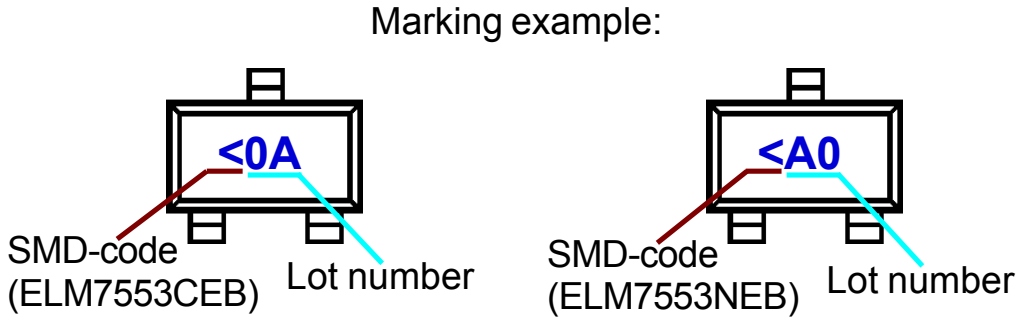

Manufacturer: Tor (Torex Semiconductor LTD):
01~09, 0A~0Z, 11~9Z, A1~A9, AA~AZ, B1~ZZ repeated, (G, I, J, O, Q, W excluded.) * No character inversion used.



Production data

Manufacturer: Anw (Anwell Semiconductor Corp.)

Dot above product code: Lot Code:

1					•
2				•	
3				•	•
4			•		
5			•		•
6			•	•	
7			•	•	•
8		•			
9		•			•
10		•		•	
11		•		•	•
12		•	•		
13		•	•		•
14		•	•	•	
15		•	•	•	•
16	•				
17	•				•
18	•			•	
19	•			•	•
20	•		•		
21	•		•		•
22	•		•	•	
23	•		•	•	•
24	•	•			
25	•	•			•
26	•	•		•	
27	•	•		•	•
28	•	•	•		
29	•	•	•		•
30	•	•	•	•	
31	•	•	•	•	•

Dot under product code: Year Code:

2003			
2004			•
2005	•	•	
2006		•	•
2007	•		
2008	•		•
2009	•	•	
2010	•	•	•



Manufacturer: Ape (Advanced Power Electronics Corp.)

Code	Year
YY	2004, 2008, 2012
YY	2003, 2007, 2011
YY	2002, 2006, 2010
YY	2001, 2005, 2009



Manufacturer: Axl (AXElite Technology Co., Ltd)

Code	Year	Code	Week
7	2007	**A...Z**	1...26
8	2008	**a...z**	27...52
9	2009		
A	2010		
B	2011		
C	2012		



Manufacturer: Di (Diodes Inc.)
Y : Year : 0~9XXX
W : Week : A~Z : 1~26 week; a~z : 27~52 week; z represents 52 and 53 week

Manufacturer: Inf (Infineon Technologies AG)

Month	Year 2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014
01	a	p	A	P	a	p	A	P	a	p	A	P
02	b	q	B	Q	b	q	B	Q	b	q	B	Q
03	c	r	C	R	c	r	C	R	c	r	C	R
04	d	s	D	S	d	s	D	S	d	s	D	S
05	e	t	E	T	e	t	E	T	e	t	E	T
06	f	u	F	U	f	u	F	U	f	u	F	U
07	g	v	G	V	g	v	G	V	g	v	G	V
08	h	x	H	X	h	x	H	X	h	x	H	X
09	j	y	J	Y	j	y	J	Y	j	y	J	Y
10	k	z	K	Z	k	z	K	Z	k	z	K	Z
11	l	2	L	4	l	2	L	4	l	2	L	4
12	n	3	N	5	n	3	N	5	n	3	N	5



Manufacturer: Kec (Korea Electronics Co. Ltd.)

Year	Marking (Week)	Periode (Year)
1 st Year (2006)	01 02 ... 51 52	2006-2010-2014...
2 nd Year (2007)	0A 0B ... 5A 5B	2007-2011-2015...
4 rd Year (2008)	J1 J2 ... E1 E2	2008-2012-2016...
4 th Year (2009)	JA JB ... EA EB	2009-2013-2017...



Manufacturer: Nxp (NXP Semiconductors)

Year codes are indicated by a four-segment bar code on left of case:
Last Digit of Year:



Month codes are indicated by a four-segment bar code on right of case:
Last Digit of Month:





Manufacturer: Max (Maxim Integrated Products)

Year codes are indicated by a four-segment horisontal bar code on left of case:



Week codes are indicated by a four-segment vertical bar code on left of case:



Manufacturer: Pti (Pericom Tecnology Inc.)

Year		Week		Year		Week		Year		Week		Year		Week		Year		Week	
2005	P	1	A	2006	R	1	A	2007	T	1	A	2008	V	1	A	2009	X	1	A
2005	P	2	B	2006	R	2	B	2007	T	2	B	2008	V	2	B	2009	X	2	B
2005	P	3	C	2006	R	3	C	2007	T	3	C	2008	V	3	C	2009	X	3	C
2005	P	4	D	2006	R	4	D	2007	T	4	D	2008	V	4	D	2009	X	4	D
2005	P	5	E	2006	R	5	E	2007	T	5	E	2008	V	5	E	2009	X	5	E
2005	P	6	F	2006	R	6	F	2007	T	6	F	2008	V	6	F	2009	X	6	F
2005	P	7	G	2006	R	7	G	2007	T	7	G	2008	V	7	G	2009	X	7	G
2005	P	8	H	2006	R	8	H	2007	T	8	H	2008	V	8	H	2009	X	8	H
2005	P	9	I	2006	R	9	I	2007	T	9	I	2008	V	9	I	2009	X	9	I
2005	P	10	J	2006	R	10	J	2007	T	10	J	2008	V	10	J	2009	X	10	J
2005	P	11	K	2006	R	11	K	2007	T	11	K	2008	V	11	K	2009	X	11	K
2005	P	12	L	2006	R	12	L	2007	T	12	L	2008	V	12	L	2009	X	12	L
2005	P	13	M	2006	R	13	M	2007	T	13	M	2008	V	13	M	2009	X	13	M

Year		Week		Year		Week		Year		Week		Year		Week		Year		Week	
2005	P	14	N	2006	R	14	N	2007	T	14	N	2008	V	14	N	2009	X	14	N
2005	P	15	O	2006	R	15	O	2007	T	15	O	2008	V	15	O	2009	X	15	O
2005	P	16	P	2006	R	16	P	2007	T	16	P	2008	V	16	P	2009	X	16	P
2005	P	17	Q	2006	R	17	Q	2007	T	17	Q	2008	V	17	Q	2009	X	17	Q
2005	P	18	R	2006	R	18	R	2007	T	18	R	2008	V	18	R	2009	X	18	R
2005	P	19	S	2006	R	19	S	2007	T	19	S	2008	V	19	S	2009	X	19	S
2005	P	20	T	2006	R	20	T	2007	T	20	T	2008	V	20	T	2009	X	20	T
2005	P	21	U	2006	R	21	U	2007	T	21	U	2008	V	21	U	2009	X	21	U
2005	P	22	V	2006	R	22	V	2007	T	22	V	2008	V	22	V	2009	X	22	V
2005	P	23	W	2006	R	23	W	2007	T	23	W	2008	V	23	W	2009	X	23	W
2005	P	24	X	2006	R	24	X	2007	T	24	X	2008	V	24	X	2009	X	24	X
2005	P	25	Y	2006	R	25	Y	2007	T	25	Y	2008	V	25	Y	2009	X	25	Y
2005	P	26	Z	2006	R	26	Z	2007	T	26	Z	2008	V	26	Z	2009	X	26	Z
2005	Q	27	A	2006	S	27	A	2007	U	27	A	2008	W	27	A	2009	Y	27	A
2005	Q	28	B	2006	S	28	B	2007	U	28	B	2008	W	28	B	2009	Y	28	B
2005	Q	29	C	2006	S	29	C	2007	U	29	C	2008	W	29	C	2009	Y	29	C
2005	Q	30	D	2006	S	30	D	2007	U	30	D	2008	W	30	D	2009	Y	30	D
2005	Q	31	E	2006	S	31	E	2007	U	31	E	2008	W	31	E	2009	Y	31	E
2005	Q	32	F	2006	S	32	F	2007	U	32	F	2008	W	32	F	2009	Y	32	F
2005	Q	33	G	2006	S	33	G	2007	U	33	G	2008	W	33	G	2009	Y	33	G
2005	Q	34	H	2006	S	34	H	2007	U	34	H	2008	W	34	H	2009	Y	34	H
2005	Q	35	I	2006	S	35	I	2007	U	35	I	2008	W	35	I	2009	Y	35	I
2005	Q	36	J	2006	S	36	J	2007	U	36	J	2008	W	36	J	2009	Y	36	J
2005	Q	37	K	2006	S	37	K	2007	U	37	K	2008	W	37	K	2009	Y	37	K
2005	Q	38	L	2006	S	38	L	2007	U	38	L	2008	W	38	L	2009	Y	38	L
2005	Q	39	M	2006	S	39	M	2007	U	39	M	2008	W	39	M	2009	Y	39	M
2005	Q	40	N	2006	S	40	N	2007	U	40	N	2008	W	40	N	2009	Y	40	N
2005	Q	41	O	2006	S	41	O	2007	U	41	O	2008	W	41	O	2009	Y	41	O
2005	Q	42	P	2006	S	42	P	2007	U	42	P	2008	W	42	P	2009	Y	42	P
2005	Q	43	Q	2006	S	43	Q	2007	U	43	Q	2008	W	43	Q	2009	Y	43	Q
2005	Q	44	R	2006	S	44	R	2007	U	44	R	2008	W	44	R	2009	Y	44	R
2005	Q	45	S	2006	S	45	S	2007	U	45	S	2008	W	45	S	2009	Y	45	S
2005	Q	46	T	2006	S	46	T	2007	U	46	T	2008	W	46	T	2009	Y	46	T
2005	Q	47	U	2006	S	47	U	2007	U	47	U	2008	W	47	U	2009	Y	47	U
2005	Q	48	V	2006	S	48	V	2007	U	48	V	2008	W	48	V	2009	Y	48	V
2005	Q	49	W	2006	S	49	W	2007	U	49	W	2008	W	49	W	2009	Y	49	W
2005	Q	50	X	2006	S	50	X	2007	U	50	X	2008	W	50	X	2009	Y	50	X
2005	Q	51	Y	2006	S	51	Y	2007	U	51	Y	2008	W	51	Y	2009	Y	51	Y
2005	Q	52	Z	2006	S	52	Z	2007	U	52	Z	2008	W	52	Z	2009	Y	52	Z

2010	Z	1	A	2011	B	1	A	2012	D	1	A	2013	F	1	A	2014	H	1	A
2010	Z	2	B	2011	B	2	B	2012	D	2	B	2013	F	2	B	2014	H	2	B
2010	Z	3	C	2011	B	3	C	2012	D	3	C	2013	F	3	C	2014	H	3	C
2010	Z	4	D	2011	B	4	D	2012	D	4	D	2013	F	4	D	2014	H	4	D
2010	Z	5	E	2011	B	5	E	2012	D	5	E	2013	F	5	E	2014	H	5	E
2010	Z	6	F	2011	B	6	F	2012	D	6	F	2013	F	6	F	014	H	6	F
2010	Z	7	G	2011	B	7	G	2012	D	7	G	2013	F	7	G	2014	H	7	G
2010	Z	8	H	2011	B	8	H	2012	D	8	H	2013	F	8	H	2014	H	8	H
2010	Z	9	I	2011	B	9	I	2012	D	9	I	2013	F	9	I	2014	H	9	I
2010	Z	10	J	2011	B	10	J	2012	D	10	J	2013	F	10	J	2014	H	10	J
2010	Z	11	K	2011	B	11	K	2012	D	11	K	2013	F	11	K	2014	H	11	K
2010	Z	12	L	2011	B	12	L	2012	D	12	L	2013	F	12	L	2014	H	12	L
2010	Z	13	M	2011	B	13	M	2012	D	13	M	2013	F	13	M	2014	H	13	M
2010	Z	14	N	2011	B	14	N	2012	D	14	N	2013	F	14	N	2014	H	14	N
2010	Z	15	O	2011	B	15	O	2012	D	15	O	2013	F	15	O	2014	H	15	O
2010	Z	16	P	2011	B	16	P	2012	D	16	P	2013	F	16	P	2014	H	16	P
2010	Z	17	Q	2011	B	17	Q	2012	D	17	Q	2013	F	17	Q	2014	H	17	Q
2010	Z	18	R	2011	B	18	R	2012	D	18	R	2013	F	18	R	2014	H	18	R
2010	Z	19	S	2011	B	19	S	2012	D	19	S	2013	F	19	S	2014	H	19	S
2010	Z	20	T	2011	B	20	T	2012	D	20	T	2013	F	20	T	2014	H	20	T
2010	Z	21	U	2011	B	21	U	2012	D	21	U	2013	F	21	U	2014	H	21	U
2010	Z	22	V	2011	B	22	V	2012	D	22	V	2013	F	22	V	2014	H	22	V
2010	Z	23	W	2011	B	23	W	2012	D	23	W	2013	F	23	W	2014	H	23	W
2010	Z	24	X	2011	B	24	X	2012	D	24	X	2013	F	24	X	2014	H	24	X
2010	Z	25	Y	2011	B	25	Y	2012	D	25	Y	2013	F	25	Y	2014	H	25	Y
2010	Z	26	Z	2011	B	26	Z	2012	D	26	Z	2013	F	26	Z	2014	H	26	Z
2010	A	27	A	2011	C	27	A	2012	E	27	A	2013	G	27	A	2014	J	27	A
2010	A	28	B	2011	C	28	B	2012	E	28	B	2013	G	28	B	2014	J	28	B
2010	A	29	C	2011	C	29	C	2012	E	29	C	2013	G	29	C	2014	J	29	C
2010	A	30	D	2011	C	30	D	2012	E	30	D	2013	G	30	D	2014	J	30	D
2010	A	31	E	2011	C	31	E	2012	E	31	E	2013	G	31	E	2014	J	31	E
2010	A	32	F	2011	C	32	F	2012	E	32	F	2013	G	32	F	2014	J	32	F
2010	A	33	G	2011	C	33	G	2012	E	33	G	2013	G	33	G	2014	J	33	G
2010	A	34	H	2011	C	34	H	2012	E	34	H	2013	G	34	H	2014	J	34	H
2010	A	35	I	2011	C	35	I	2012	E	35	I	2013	G	35	I	2014	J	35	I
2010	A	36	J	2011	C	36	J	2012	E	36	J	2013	G	36	J	2014	J	36	J
2010	A	37	K	2011	C	37	K	2012	E	37	K	2013	G	37	K	2014	J	37	K
2010	A	38	L	2011	C	38	L	2012	E	38	L	2013	G	38	L	2014	J	38	L
2010	A	39	M	2011	C	39	M	2012	E	39	M	2013	G	39	M	2014	J	39	M
2010	A	40	N	2011	C	40	N	2012	E	40	N	2013	G	40	N	2014	J	40	N
2010	A	41	O	2011	C	41	O	2012	E	41	O	2013	G	41	O	2014	J	41	O
2010	A	42	P	2011	C	42	P	2012	E	42	P	2013	G	42	P	2014	J	42	P
2010	A	43	Q	2011	C	43	Q	2012	E	43	Q	2013	G	43	Q	2014	J	43	Q
2010	A	44	R	2011	C	44	R	2012	E	44	R	2013	G	44	R	2014	J	44	R
2010	A	45	S	2011	C	45	S	2012	E	45	S	2013	G	45	S	2014	J	45	S
2010	A	46	T	2011	C	46	T	2012	E	46	T	2013	G	46	T	2014	J	46	T

Year		Week		Year		Week		Year		Week		Year		Week		Year		Week	
2010	A	47	U	2011	C	47	U	2012	E	47	U	2013	G	47	U	2014	J	47	U
2010	A	48	V	2011	C	48	V	2012	E	48	V	2013	G	48	V	2014	J	48	V
2010	A	49	W	2011	C	49	W	2012	E	49	W	2013	G	49	W	2014	J	49	W
2010	A	50	X	2011	C	50	X	2012	E	50	X	2013	G	50	X	2014	J	50	X
2010	A	51	Y	2011	C	51	Y	2012	E	51	Y	2013	G	51	Y	2014	J	51	Y
2010	A	52	Z	2011	C	52	Z	2012	E	52	Z	2013	G	52	Z	2014	J	52	Z

Marking example:



Manufacturer: Sew (Seaward Electronics Inc.)

Code	Year	Code	Week
$\overline{5}$	2001	A...Z	1...26
$\underline{5}$	2002	a...z	27...52
$\overline{6}$	2003		
$\underline{6}$	2004		
$\overline{7}$	2005		
$\underline{7}$	2006		
$\overline{8}$	2007		
$\underline{8}$	2018		
$\overline{9}$	2009		
$\underline{9}$	2010		

Marking example:



A dot on top right corner of case is for lead-free process.

Manfacturer: Leshan Radio Company

Year code: 1...9= 2001...2009; $\overline{0}$- 2010, $\overline{1}$- 2011...$\overline{9}$- 2019

Week code:

A	1	L	12	W	23	$\overline{H}$	34	$\overline{S}$	45
B	2	M	13	X	24	$\overline{I}$	35	$\overline{T}$	49
C	3	N	14	Y	25	$\overline{J}$	36	$\overline{U}$	47
D	4	O	15	Z	26	$\overline{K}$	37	$\overline{V}$	48
E	5	P	16	$\overline{A}$	27	$\overline{L}$	38	$\overline{W}$	49
F	6	Q	17	$\overline{B}$	28	$\overline{M}$	39	$\overline{X}$	50
G	7	R	18	$\overline{C}$	29	$\overline{N}$	40	$\overline{Y}$	51
H	8	S	19	$\overline{D}$	30	$\overline{O}$	41	$\overline{Z}$	52
I	9	T	20	$\overline{E}$	31	$\overline{P}$	42		
J	10	U	21	$\overline{F}$	32	$\overline{Q}$	43		
K	11	V	22	$\overline{G}$	33	$\overline{R}$	44		

Marking example:



Manufacturer: Ste (SGS-Thomson Microelectronics)

Code	Week
A	01, 02
B	03, 04
C	05, 06
...	...
Z	51, 52, 53

Marking example:



SECTION 18
Case drawings



0402
0503 1005
0603 SOD-723F

0402S 0805S
0503S 1206S



0805
1206

1408

1607
SMA
SMA-1

1F
2F
3-4D1A

1F1A
SOD-123
SOD-323

2025
CP
CPH3

2-2H1A
2-2H1B
SC-89-3

2-2K1A
2-2K1B

2-3JIA
2-3JIB

403
403-01 403B-01
403A 403C
403A-03 403D-2

BGA-4
CB4-3
UCSP-4

BGA-5
WCSP-5

BGA-6
µBGA-6
WCSP-6

BGA-8 MBGA-8
µBGA-8 WCSP-8

BGA-8A

BGA-9

BGA-10

BGA-12

BGA-14

BGA-15

BGA-16

BGA-18


BGA-20


BGA-24


BGA-25


BGA-29


BGA-30


BGA-36


BGA-42


BGA-48


BGA-49

CL-2025

CMPAK
CPA
MCP3

CMPAK-4 SC-61
MPAK-4 SC-70-4
SC-70-4L

CMPAK-5 SC-70-5
CP5 SC-70-5L
SC-88A

CMPAK-6

CP4
SMQ
USQ

CP-8

CP-6-3

CP-16

D-2PAK TO-252
D-PAK TO-263

DFN-6 UFN-6
DFN-6L USP-6
LLP-6 VSON-6

DFN-8 TDFN-8
DFN-8 2x2 U-DFN3030-8
DFN-8 3x3 UDFN-8B

DFN-10
DFN2527-10
TDFN-10

DFN-10-4

DFN-12

DFN1006-2
GMD2
QFN
SOD-882T
TSLP-2-7
TSSLP-2-1
ULP-2

DFN1006-3
ML3
ML3-N2
SOT-883
SOT-883L
TSLP-3

DFN1010
µQFN
QFN-6



DFN1010-4
MLF-4
USPQ-4B03

DFN1010C-4
SOT-1226

DFN1212-6
DFN1216-6F
DFN1410
SOT1115
SOT1202
SOT886

DFN1216-8
DFN2020-8
PLP2020-8



DFN1310-6

DFN-14
TDFN-14



DFN1411-3

DFN-16

DFN1612-4
DFN1612-4B
LLP-4
PLP1612-4
USP-4
USP-4D

DFN1616-6
DFN1616-6B

DFN1820-6
PLP2514-6

DFN2020-6
PLP1616-6

DFN2020-B3
WBFBP-03B



DFN3020B-8

DO-214AA
DO-214AB
DO-214AC
DO-214BA

DO-215AA
DO-215AB

DO-216
DO-216AA

DO-219AA
DO-221AC
SD
SFP
S-Mini
SSMini2
SSSMini2

DO-220AA

DO-222AA



DS-123
PowDI123
PowDI323
SOD-123ST
USF

DWG4A
DWG4B

ECSP1006-2T
SOT-882
TSLP-2-1

EFP SMini2-F3
PMDU SOD-323FL
SCD-80 SOD-523FL

EM3 SC-59A
Mini3-G1 SC-70-3
Minit3-F1 SC-70-3L

EMT3

EMT3F SC-89
F5T SOT-523F
MCPH3 SST

EMT5
ESV SON-5
SMini5 SOT-553



EMT6 SMM-6
HSNT-6 SON1612-6
HSON-6 SON-6

ES6
FS6

ESC SOD-723A
SC-79 SOD-923
SMB-F SOD-923FL

ESM SOT-490
SON1408-3 SSFP
SOT-323F TSFP-3

F2
LRP NMiniP2
Mini Power SC



FBPD-723
FBPT-523 FBPT-923
FBPT-723 USP-3

FC-5
WLCSP-5
WLP5-03

FG873
LLP-X

fSM TFSM
SOT-923 VMN3

FTUSM-6
HVSOF6

HD DIP
SC-82SA SOP-4



HSNT-4



HSNT-6A

HSOP-6J



HTSSOP-54

HVSOF5
SOT-665

LL-34

LLD
SOD-80
SOD-80C

LLP75-3B



LQ-8



LQFN-24
LQFP-24
TQFN-24



LQFN-32



LQFP-24
QFN-24

M04

M05

MCP
MPAK
SC-59
SC-70
SC70-3
SC-75
SC-75A

MCPH5
MPAK-5
SC-59-5
SC-74A
SOT753



M-FLAT
S-FLAT
SMF
SOD-123S

MicroSMA
SOD-123J

MicroSMP
SMA-S

ML4
ML4-N1
TSLP-4-4



MLF-6



MLF-6A



MLF-8

MLF-10
MLF-10L

MLF-12

MLP33



MLP35
TLM833

MP

MP2

MPAK-4R
SC-82AB
SOT-143
SOT-143B

MPAK-6 SC-74R
SC-70-6 SC-88
SC-74 SC-95

MPAK-8
S8 SOP-8
SM8 SOP-8EP

MPT3
PCP SOT-89-3L
SC-62 SOT-89-3L
SOT-89 UPAK

MSOP-6 TSOT-23-6L
TSOT-23-6 US6

MS8 MSOP-8B
MSOP-8 MSOP-8L
MSOP-8A SOT765-1

MSOP-10
SSOP-10

MW4

MW6



PLP1820-6 USP-6C
USP-6B USP-6EL

POWERMITE
SC-63

PSOP-8



QFN-8



QFN-12
TQFN-12



QFN-16
TQFN-16



QFN-20
TQFN-20



QFN-24



QFN-32



QFN-44



SC-64

SC701JW8

SC-76

SC-78 SMCP
SC-90 SMD3

SC-82 SOT-143R
SC-82-4 SOT-343R

SC-82S

SCT-595

SM6 SOT-23-6
SMini6 SOT-23-6L
SOP-6 SOT-23-6W

SMA-F SOD-123H
SOD-123F SOD-123L

S-Mini2

SMini3-F1
SMini3-F2-B
SS-Mini3-F1

SMini3-G1

SMPAK SST3
SMT3 TSM
SPT TSMT3

SMV SOT-23-5L
SO5-1 SOT-23-5T
SOT-23-5 SOT-25

SNMiniP2

SNT-4
SNT-4A

SNT-6A

SNT-8A
SON-8
VSON-8

SOD-6
SOD-15
SOD-106

SOD-110

SOD-123FL SOD-323F
SOD-123HE SOD-323HE
SOD-123W SOD-323-S

SOD-323
URP VMN
USC VSC

SOD-523
SOD-723
SOD-723FL

SOD-882

SOIC-8
SOP-8FD

SON-4

SOP-10

SOP-12

SOP-14
SSOP-14
TSSOP-14

SOP-16 TSSOP-16
SOP-16L TSSOP-16EP

SOP-20
TSSOP-20
TSSOP-20EP

SSOP-24
TSSOP-24

TSSOP-28EP

SOT-23
SOT-23-3L
SOT-23C-3
SOT-23F
SOT-23L

SOT-23L-6
SOT-26
SOT-26R
SOT-26W
SOT-323-6L
SOT-363

SOT-28
SOT-23-8
SOT-23L-8
SSOP-8
SSOP-8-P



SOT-89-5
SOT-89-5L

SOT-223

SOT-223-5

SOT-223-5A

SOT-323
SOT-346
SOT-416
SOT-523
TSOT-23

SOT-343



SOT-353
SOT-353-1
SSOP-5
SSOP-5-P

SOT-457
SOT505-2
TS6
TSOP-6

SOT-543



SOT-553-6
SOT-563
SOT-563-6
SOT-666
TES6
TFS6

SOT-663
SOT-723
TESM
T-USM

SOT833-1
SOT891
SOT1089
SOT1116
SOT1203

SOT902-1



SOT996-2



SSMini5

SSMini3-F3-B
SS-MiniF

SSSMini3
SSSMini3-F1

SSOP-3



SSON004X1010

SSON004X1216

SSOT-24

TESV VSOF-5
TFSV VSON-5

TFSC
TUMD2 UFP
TURP-FM VMD2

TO-251
TO-262



TO-252-5

TO-263-3L

TO-263-3L



TO-277A



TSC75-6L

TSFP-4



TSOP-5 TSOT-25
TSOT-23-5 TSV
TSOT-23-5L USV

UDFN-6
USPN-6



UJ-5

UltraMite

UMD2

UMD3 USM
UMT3 VMD3

UMT3F
VMT3
VSM

US8
VSSOP-8

USP-6B04



WDFN-6
WDFN-6L

WDFN-8



USPN-4
USPN-4B02

SECTION 19

Manufacturers logos and URL

Aat- Advanced Analog Technology
http://www.aatech.com.tw/index.aspx

Ad- Analog Devices
http://www.analog.com

Adt- ADDtek
http://www.addmtek.com/Index.htm

Agi- Agilent Technologies
www.semiconductor.agilent.com

Aic- Analog Integrations Corporation
http://www.analog.com.tw

Ali- Alliance Semiconductor
http://www.alsc.com

All- Allegro MicroSystems Inc.
http://www.allegromicro.com

Ame- AME, Inc.
www.ame.com.tw

Ams- AMOS Technology Limited
http://www.amos-tech.com

Amz- Amazing Microelectronic
http://www.amazingIC.com

Ana- Anachip Corp.
www.anachip.com.tw

Anp- Anpec Electronics Corp.
www.anpec.com.tw

Ans- AnaSem Inc.
http://www.anasem.net/

Ant- Advanced Analogic Technologies, Inc.
http://www.analogictech.com

Anw- Anwell Semiconductor Corp.
http://www.ansc.com.tw/

Aom- Alpha & Omega Semiconductor
http://www.aosmd.com/

Aot- IRICO AOTOM (Hong Kong) Holdings Co., Ltd.
http://www.aotom.com

Ape- Advanced Power Electronics Corp.
http://www.a-power.com.tw/index.aspx

Ask- AKM Semiconductor Inc.
http://akm.com/index.asp

Asm- Austria Microsystems AG
http://www.austriamicrosystems.com

Atr- Aimtron
http://www.aimtron.com.tw

Auk- AUK Semiconductor Corp.
http://www.auk.co.kr

Avi- Avic Electronics Corp.
http://www.avictek.com

Awn- Awinic Technology
http://www.awinic.com.cn/Product.aspx

Axl- AXElite Technology Co., Ltd
www.axelite.com.tw/

Axp- Analog Express Corp.
http://www.analogexpress.com

Bb- Burr-Brown Corp.
http://www.burr-brown.com

Bcd- BCD Semiconductor Manufacturing Limited
http://www.bcdsemi.com/en/index.aspx

Brn- Bourns, Inc.
http://www.bourns.com/

Brw- Brightwell Technology Ltd
(There is no accesible information)

Bts- Bytesonic Corporation
http://www.bytesonic.com

Cal- Calogic, LLC
http://www.calogic.net/

Can- Canaan Microelectronics Corp. Ltd.
http://www.canaan-micro.com

Cdi- Continental Device India Limited
http://www.cdil.com

Cel- California Eastern Laboratories
http://www.cel.com

Cen- Central Semiconductor Corp.
http://www.centralsemi.com

Cer- Ceramite Technical Co., Ltd.
http:www.ceramate.com.tw

Chm- Chenmko Enterprise Co., Ltd.
http://www.chenmko.com/

Cit- Chip Integration Technology
http://www.citcorp.com.tw

Cmc- Comchip Technology Corporation
http://www.comchip.com.tw/

Cme- **Chipstar Microelectronics**
http://www.chipstar-ic.com

Cpm- **Chiphomer Technology Ltd.**
http://www.chiphomer.com

Crp- **Crownpo Technology Inc.**
www.crownpo.com

Csm- **Chengdu Sino Microelectronics**
http://www.csmsc.com

Ctc- **Compact Technology Corp.**
http://www.ctc-semicon.com/?action=index

Cys- **Cystech Electronics Corp.**
http://wwwt.cystekec.com/

Cyt- **Shenzhen CYT Opto-Electronic Technology Co.,Ltd.**
http://www.szcyt.com/en-us/

Dac- **DACO Semiconductor Co., Ltd.**
http://www.dacosemi.com.tw

Dal- **Dallas Semiconductor Corporation**
http://www.dalsemi.com

Dbp- **DB Power Tech Inc.**
http://www.dbpowertech.com/

Di- **Diodes Inc.**
http://www.diodes.com

Did- **Diodesemi Technology Inc.**
www.diodesemi.com

Ecm- **E-CMOS Corporation**
http://www.ecmos.com.tw

Eic- **EIC Semiconductor, Inc.**
http://www.eicsemi.com

Elm- **ELM Technology Corporation**
http://www.elm-tech.com/

Em- **EM Microelectronic-Marin SA**
http://www.emmicroelectronic.com

Emp- **Elite Semiconductor Memory Technology Inc.**
http://www.elitemicropower.com

Eor- **Eorex Corporation**
http://www.eorex.com/

Ers- **Eris Technology Corporation**
http://www.eris.com.tw/

Etc- **Electronic Technology Corp.**
http://www.etechcorp.com

Eut- Eutech Microelectronics Inc.
http://www.eutechmicro.com

Exc- Excel Semiconductor Inc.
www.excel-semi.com

Ext- Extensive Technology Co., Ltd.
http://www.extensivetech.com

F- Fairchild Semiconductor Corp.
http://www.fairchildsemi.com

Fag- Fagor Electronica
http://www.fagorelectronica.es

Fee- Feeling Team Inc.
http://feelingteam.com.tw

Fer- Ferranti Semiconductors
(Bought by GPSI)

Fis- First Silion Co., Ltd.
http://www.firstsilicon.co.kr/

Fit- Fitipower Integrated Technology
http://eng.fitipower.com

Fji- Fuji Semiconductor
http://www.fujielectric.co.jp

Fmd- Fremont Micro Devices Inc.
www.fremontmicro.com

Fre- Frontier Electronics
http://www.frontierusa.com/

Frm- Formosa Microsemi Co., Ltd
http://www.formosams.com/

Frt- Fortune Semiconductor Corp.
http://www.ic-fortune.com/

Fsl- Foslink Semiconductor Co., Ltd.
http://www.foslink.com/

Gal- Galaxy Semiconductor Co., Ltd.
www.galaxycn.com

Gam- Gamma Microelectronics
http://www.gammamicro.com.tw/apm/en/index.asp

Gen- Gennum Corp.
http://www.gennum.com

Glo- Globaltech Semiconductor
www.gs-power.com

Gme- Galaxy microelectronics Co., Ltd
http://www.gmicroelec.com/index.htm

Gmt- Global Mixed-mode Technology Inc.
http://www.gmt.com.tw/

Go2- Go2Silicon. Inc
http://www.go2silicon.com/

Gse- General Semiconductor
hhttp://www.gensemi.com

Gtm- GTM Corporation
http://www.gtm.com.tw/

Hit- Hitachi, Ltd.
http://www.hitachi.co.jp/products/power/pse/

Hrc- Jiaxing Heroic Electronic Technology Co., Ltd.
http://www.heroic.com.cn

Hsn- Hi-Sincerity Microelectronics Corp.
http://www.hsmc.com.tw/

Htc- HTC Korea
http://www.htckorea.co.kr/japan/sub02.php

Htk- Holtek Semiconductor Inc.
http://www.holtek.com.tw

Htt- Hittite Microwave Corporation
http://www.hittite.com/

Icm- ICmic-UniKL Academy
l*http://www.icmic-unikl.com/*

Ids- iDESYN Semiconductor Corp.
http://www.idesyn.com/

Idt- Integrated Device Technology
http://www.idt.com/

Imp- IMP, Inc.
http://www.ds-imp.com.cn/

Inf- Infineon Technologies AG
http://www.infineon.com

Inw- Infinewin Electron Technique Co., Ltd
http://www.infinwin.com/

Irf- International Rectifier
http://www.irf.com

Ish- Isahaya Electronics Corporation
http://www.idc-com.co.jp/

Isl- Intersil Inc.
http://www.intersil.com

Itt- ITT Intermetall
http://www.itt-sc.de

Jbs- Jian Hui Power Electronics Technology Co., Ltd.
http://www.jbsemi.com

Jce- Jiangsu Changjiang Electronics Technology Co., Ltd
http://www.cj-elec.com

Jgd- Jinan Gude Electronic Device
http://www.jgd.com.cn/

Jiu- JinYu semiconductor
http://www.htsemi.com

Kau- Kodenshi AUK
http://www.kodenshi.co.kr

Kec- Korea Electronics Co. Ltd
http://www.kec.co.kr

Kex- KEXIN Group
www.kexin.com.cn

Ktc- Kingbor Technology Co., Ltd
http://www.kingbor.com/

Lch- Shanghai LeadChip Microelectronics
http://www.leadchip.com.cn

Ldt- Shanghai Leiditech Electronics Technology Co., Ltd
http://www.leiditech.com/

Lfr- Lucky Forest Corporation
http://lucky.erufa.com

Lge- Luguang Electronic Technology Co., Ltd
http://www.luguang.cn/web_en/index.html

Lif- Littelfuse, Inc.
http://www.littelfuse.com

Lin- LinFinity Microelectronics Inc.
http://www.microsemi.com/

Lns- Linear Integrated System, Inc.
http://www.linearsystems.com/

Lrc- Leshan Radio Company, Ltd.
http://www.lrc-china.com

Lsr- Shanghai Lunsure Electronic Technology Co., Ltd
http://www.cnelectr.com/

Ltc- Linear Technology Corporation
http://www.linear.com

Ltk- Lyontek Incorporation
http://www.lyontek.com.tw/

Ltr- Leadtrend Technology
http://www.leadtrend.com.tw/

Mam- **Matrix Microtech Corp.**
www.matrix-microtech.com.tw

Mas- **Micro Analog Systems Oy**
http:\\www.mas-oy.com

Max- **Maxim Integrated Products**
http://www.maxim-ic.com

Mc- **Mini-Circuits**
http://www.minicircuits.com

Mcc- **Microchip Technology Inc.**
http://www.microchip.com

Mco- **Micro Commercial Components**
www.mccsemi.com

Mcr- **Micrel Inc.**
http://www.micrel.com

Mde- **MDE Semiconductor, Inc.**
www.mdesemiconductor.com

Mei- **MEI Semiconductor**
http://www.megastar.com/products/mei/semiconductors/index.aspx

Mep- **MegaPower Semiconductor Ltd**
http://www.megapower.com.cn

Mic- **Master Instrument Corporation of Shanghai**
http://www.cnmic.com

Mit- **Mitsubishi Electric Co. Ltd.**
http://www.mitsubishichips.com

Mlc- **MiniLogic Device Corp.**
http://www.minilogic.com.hk/

Mos- **MOSA Electronics Corp.**
http://www.mosanalog.com/

Mot- **Motorola Inc.**
http://www.motorola.com

Msc- **Microsemi Integrated Products Division**
http://www.microsemi.com

Msp- **Mospec Semiconductor Corp.**
http://www.mospec.com.tw

Mts- **Matsuki Electronic Company**
http://www.cera.matsuki-corp.com/en/main.htm

Mur- **Murata Manufacturing Co., Ltd.**
http://www.murata.com/

Nec- **NEC Electronics Inc. (Nippon Electrical Company)**
http://www.ic.nec.co.jp

Nic- NIC components Corp.
http://www.niccomp.com/index.php

Nih- Nihon Inter Electronics Corporation
http://www.niec.co.jp

Njr- New Japan Radio Co., Ltd.
http://www.njr.com

Nln- Shanghai Natlinear Electronics Co., Ltd
http://www.natlinear.com/

Nsc- National Semiconductor Corp.
http://www.national.com

Nte- NTE Electronics Inc.
http://www.nteinc.com

Nxp- NXP Semiconductors (Philips); NxC- NXP China; NXH- NXP Hong Kong; NxM- NXP Malaysia
http://www.nxp.com

Ons- ON Semiconductor
http://onsemi.com

Org- Origin Semiconsuctor
http://www.origin.co.jp

Ouy- Ouyada Electronics Co., Ltd.
http://www.szoyd.com/en/index.html

Pam- Power Analog Microelectronics, Inc
http://www.poweranalog.com/

Pan- Panasonic (Matsushita) Electronics Corp.
http://industrial.panasonic.com/

Pcr- PulseCore Semiconductor
www.pulsecoresemi.com

Pct- Princeton Technology Corp.
http://www.princeton.com.tw

Per- Pericom Semiconductor Corporation
http://www.pericom.com/

Phi- Philips GmbH; PhC- Philips China; PhH- Philips Hong Kong; PhM- Philips, Malaysia (semiconductor manufacture is handed to NXP Semconductor)

Pic- Paceleader Industrial
http://www.paceleader.tw/

Pjt- PanJIT Semiconductor
http://www.panjit.com.tw

Pln- Planeta International Group
http://www.ph-powerstorm.com.tw/

Prt- Protek Devices
http://www.protekdevices.com/

Pti- Pericom Technology Inc.
www.pti-ic.com

Rct- Richtek Technology Corp.
http://www.richtek.com/index.jsp

Ren- Renessas (Hitachi and Mitsubishi) Ltd.
http://www.renesas.eu/

Rfe- RFE International, Inc.
http://www.rfeinc.com/

Rhm- Rohm Co., Ltd.
http://www.rohm.co.jp

Ric- Ricoh Co., Ltd
http://www.ricoh.com

Rul- Ruilong Yuan Electronics
http://www.ruilon.com/en/products/

Sam- Samsung Electronics
http://www.korea.samsungsemi.com

San- Sanyo Electric Co. Ltd
http://semicon.sanyo.com

Se- Si-En Technology
http://www.secosgmbh.com/

Sec- Secos Corporation
http://www.secosgmbh.com/

Sew- Seaward Electronics Inc.
www.seawardinc.com.cn

Sgm- SG Micro Limited
http://www.sg-micro.com/f/index.aspx

Shb- Shanghai Belling Co, Ltd.
http://www.belling.com.cn

Shi- Shindengen Electric Mfg. Co. Ltd
http://www.shindengen.com

Shp- StarHope
http://www.spsemi.cn/English/default.aspx

Sie- Siemens AG
http://www.siemens.de

Sii- Seiko Instruments Inc.
http://www.sii.co.jp

Sil- Silicon General Inc (Is now part of Microsemi)
http://www.microsemi.com

Sip- Sipex
http://www.sipex.com

Sir- Sirenza Microdevices
http://www.sirenza.com

Sit- Sitech Semiconductors Co., Limited
http://www.sth-semico.com/en/index.asp

Six- Siliconix GmbH
http://www.siliconix.com

Sky- Skyworks Solutions, Inc.
http://www.skyworksinc.com

Slb- Silicon Laboratories Inc.
http://www.silabs.com/Pages/default.aspx

Sln- Hangzhou Silan Microelectronics Co., Ltd
http://www.silan.com.cn

Sme- Semtech Electronics Ltd.
http://www.semtech.net.cn/

Smt- Semtech Corporation
http://www.semtech.com

Soy- Sony Corporation
http://www.sony.co.jp

Srt- Sart Science and Technology Development
http://www.sartfuse.com/

Ssc- Silicon Standard Corp.
http://www.siliconstandard.com/

Sst- Shanghai Semitech Co.
http://www.semitech.cn/english/index.html

Sta- Stanson Technology Co., Ltd.
http://www.stansontech.com/

Ste- SGS-Thomson Microelectronics
http://www.st.com

Stx- Supertex Inc.
http://www.supertex.com

Sup- SUPEC Electronics Corp.
www.supec.com.cn

Sur- Supge Components Inc.
http://www.surgecomponents.com

Sus- SynSemi, Inc.
http://www.synsemi.com/

Syn- Sync Power Corp.
http://www.syncpower.com/

Tac- Tak Cheong Semiconductor Co., Ltd.
http://www.takcheong.com/en/index.asp

Tfk- Temic Telefunken microelectronic GmbH
http://www.temic.de

Tfr- Tin Far Electronic
http://www.tinfar.com.tw

Ti- Texas Instruments
http://www.ti.com

Tok- Toko America, Inc.
http://www.tokoam.com

Tor- Torex Semiconsuctor Ltd.
http://www.torex.co.jp

Tos- Toshiba Corporation
http://www.toshiba.com

Trs- Transys Electronics Ltd.
http://www.transyselectronics.com

Tsc- Taiwan Semiconductor Company, Ltd.
http://www.taiwansemi.com

Ttr- TAITRON Components Incorporated
www.taitroncomponents.com

Uns- Union Semiconductor
http://www.union-ic.com/index.php

Utc- Unisonic Technologies Co., Ltd.
http://www.unisonic.com.tw

Vs- Vishay Semiconductor GmbH
http://www.vishay.com

Wil- Willas Electronic
http://www.willas.com.tw/index-1.asp

Wjc- WJ Communications, Inc.
http://www.wj.com

Ws- Will Semiconductor Ltd.
http://www.willsemi.com/index_en.asp

Wte- Won-Top Electronics Co., Ltd.
http://www.wontop.com

Wtr- Weitron Technology Co., Ltd
http://www.weitron.com.tw/e_main.html

Xpt- Tshen Zhen Xptek Technology Co., Ltd.
http://www.xptek.com.cn

Ybn- Yobon Technologies, Inc.
http://www.yobon.com.tw

Zow- Zowie Technology Corporation
http://www.zowie.com.tw/

Zx- Zetex plc.
http://www.zetex.com

TURUTA ELECTRONICS WORLD

SEMICONDUCTOR COMPONENTS DATABOOKS, SERVICE MANUALS, DATASHEETS, REPAIR TECHNOLOFIES INFO

Since 2008 TURUTA ELECTRONICS WORLD are the worldwide leading publisher of e-format databooks for semiconductors info like transistors, diodes, thryistors, integrated circuits. Any electronic engineer nowadays is able to work sensibly and rationally with our products as databooks and online database. Anybody missing vital information at the decisive moment is throwing away expensive work time. We will help saving your time, nerves, energy and money. Trust a company being more than 6 years on the market.

Online SMD-codes and leaded components marking database

A monthly updated online database that includes now marking codes for different SMD and leaded, passive and active electronic components like fuses, diodes, thyristors, transistors and integrated circuits.

• **Features:**

- Search by marking code;
- Search by marking code with case class (pin number) selection;
- Exhaustive info about found electronic component;
- Direct link to a electronic component datasheet download;
- Direct link to a manufacturer web page.

Service manual

Service manuals for fax, printer, copier, mobile and wireless phone, amplifiers, car stereos, cassette decks, Blu-ray/DVD/CD players/recorders, compact stereos, equalizers, receivers, cameras, reel recorders, tuners, and other audio equipment, camcorders, monitors, TVs (including LCD, plasma PDP, projection TVs), and TV/Blu-ray/DVD/CD/VCR combo units. We have more than 80.000 documents in our growing collection!

Service manual pages navigation and searches available for any TEW visitors.

Free service manual download available only for subscribed member of TEW.

Datasheet collection



More than 250.000 datasheets - audio application integrated circuits such as preamplifiers, volume and tone controller, audio processor, audio power amplifiers; power management integrated circuits, industrial application integrated circuits available on your collection.

Electronic format databooks

TURUTA ELECTRONICS WORLD are the worldwide leading publisher of e-format databooks for semiconductors info like transistors, diodes, thryistors, integrated circuits.

• SMD-codes datbook, 2014 Edition

A new 2014 edition SMD-codes databook in electronic format from a known author Eugeniu Turuta presents the SMD-codes for active semiconductor components. This book includes now 235.000 SMD-codes for different semiconductors like diodes, thyristors, transistors and ICs.

• STK and STR integrated circuits, 2014 Edition

Data book about the common and very popular STK (Sanyo) and STR (Sanken) hybrid integrated circuits. Over 2.000 circuits from STK0025 to STR-Z4579.

Connection diagram, application, short description, table of characteristics with all common parameters, replacements, case outline drawings available for all integrated circuits.

• Power audio amplifiers - integrated circuits, 2014 Edition

A new, 2014 edition data book in electronic format from a known author Eugeniu Turuta presents the standard and modified circuit diagram, short description, electrical characteristics, pinouts and conventional case drawings of the integrated circuits - power audio amplifiers.

This book includes about 7000 most popular integrated circuits - power (final) audio amplifiers and for today is the most complete databook in the world.

TEW visitor can download sample (demo) version of all databook.

Purchase of TEW databooks is very simple and can be made directly from web-page trough PayPal payment system. If you don't have access to the PayPal payment system, write to a eturuta@gmail.com.

A new editorial policy of TEW allow to propose already existing customers (any TEW old edition databook buyers and subscribed mebers) the special (discount) price for the news databooks.

© 2014 Copyright Eugeniu Turuta
© 2014 Copyright Martin Christian Turuta
Toronto, 2014 edition
Chisinau, 2014 edition